



Report No.: RZA2010-0908



# OET 65

# TEST REPORT

Product Name	WCDMA/GSM(GPRS) Dual-Mode Digital Mobile Phone
Model	ZTE-U X850
FCC ID	Q78-UX850
Client	ZTE CORPORATION

TA Technology (Shanghai) Co., Ltd.



## GENERAL SUMMARY

<b>Product Name</b>	WCDMA/GSM(GPRS) Dual-Mode Digital Mobile Phone	<b>Model</b>	ZTE-U X850
<b>FCC ID</b>	Q78-UX850	<b>Report No.</b>	RZA2010-0908
<b>Client</b>	ZTE CORPORATION		
<b>Manufacturer</b>	ZTE CORPORATION		
<b>Reference Standard(s)</b>	<p><b>IEEE Std C95.1, 1999:</b> IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.</p> <p><b>SUPPLEMENT C Edition 01-01 to OET BULLETIN 65 Edition 97-01 June 2001 including DA 02-1438 June 19, 2002:</b> Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields Additional Information for Evaluation Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions.</p> <p><b>IEEE Std 1528™-2003:</b> IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.</p>		
<b>Conclusion</b>	<p>This portable wireless equipment has been measured in all cases requested by the relevant standards. Test results in Chapter 7 of this test report are below limits specified in the relevant standards.</p> <p>General Judgment: <b>Pass</b></p>		
<b>Comment</b>	The test result only responds to the measured sample.		

Approved by 杨伟中

Yang Weizhong

Revised by 凌敏宝

Ling Minbao

Performed by 薛超峰

Xue Chaofeng



(Stamp)

Date of issue: July 2<sup>nd</sup>, 2010

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**TABLE OF CONTENT**

1. General Information .....	5
1.1. Notes of the test report .....	5
1.2. Testing laboratory .....	5
1.3. Applicant Information .....	6
1.4. Manufacturer Information.....	6
1.5. Information of EUT.....	7
1.6. The Maximum SAR <sub>1g</sub> Values and Conducted Power of each tested band .....	8
1.7. Test Date .....	8
2. Operational Conditions during Test .....	9
2.1. General description of test procedures .....	9
2.2. GSM Test Configuration.....	9
2.3. WCDMA Test Configuration .....	10
2.3.1. Output power Verification .....	10
2.3.2. Head SAR Measurements .....	10
2.3.3. Body SAR Measurements .....	10
2.4. HSDPA Test Configuration .....	10
2.5. HSUPA Test Configuration .....	13
2.6. WIFI Test Configuration .....	15
3. SAR Measurements System Configuration.....	16
3.1. SAR Measurement Set-up .....	16
3.2. DASY4 E-field Probe System .....	17
3.2.1. EX3DV4 Probe Specification .....	17
3.2.2. E-field Probe Calibration.....	18
3.3. Other Test Equipment .....	18
3.3.1. Device Holder for Transmitters .....	18
3.3.2. Phantom .....	19
3.4. Scanning procedure.....	19
3.5. Data Storage and Evaluation .....	21
3.5.1. Data Storage.....	21
3.5.2. Data Evaluation by SEMCAD .....	21
3.6. System check.....	24
3.7. Equivalent Tissues .....	25
4. Laboratory Environment.....	26
5. Characteristics of the Test.....	27
5.1. Applicable Limit Regulations .....	27
5.2. Applicable Measurement Standards .....	27
6. Conducted Output Power Measurement.....	28
6.1. Summary .....	28
6.2. Conducted Power Results .....	28
7. Test Results .....	32

# TA Technology (Shanghai) Co., Ltd.

## Test Report

---

7.1. Dielectric Performance.....	32
7.2. System Check Results.....	33
7.3. Test Results .....	34
7.3.1. GSM850 (GPRS/EGPRS).....	34
7.3.2. GSM1900 (GPRS/EGPRS).....	35
7.3.3. WCDMA Band II (WCDMA/HSDPA/HSUPA).....	36
7.3.4. WCDMA Band V (WCDMA/HSDPA/HSUPA) .....	37
7.3.5. BT/WIFI function .....	38
8. Measurement Uncertainty .....	41
9. Main Test Instruments .....	42
ANNEX A: Test Layout .....	43
ANNEX B: System Check Results .....	47
ANNEX C: Graph Results .....	53
ANNEX D: Probe Calibration Certificate .....	138
ANNEX E: D835V2 Dipole Calibration Certificate .....	149
ANNEX F: D1900V2 Dipole Calibration Certificate .....	158
ANNEX G: D2450V2 Dipole Calibration Certificate.....	167
ANNEX H: DAE4 Calibration Certificate.....	176
ANNEX I: The EUT Appearances and Test Configuration .....	181

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2010-0908

Page 5 of 185

### 1. General Information

#### 1.1. Notes of the test report

**TA Technology (Shanghai) Co., Ltd.** guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

**TA Technology (Shanghai) Co., Ltd.** is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test. This report only refers to the item that has undergone the test.

This report standalone dose not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

#### 1.2. Testing laboratory

Company: TA Technology (Shanghai) Co., Ltd.

Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai,China

City: Shanghai

Post code: 201201

Country: P. R. China

Contact: Yang Weizhong

Telephone: +86-021-50791141/2/3

Fax: +86-021-50791141/2/3-8000

Website: <http://www.ta-shanghai.com>

E-mail: [yangweizhong@ta-shanghai.com](mailto:yangweizhong@ta-shanghai.com)

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2010-0908

Page 6 of 185

### 1.3. Applicant Information

Company: ZTE CORPORATION  
Address: ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R. China  
City: Shenzhen  
Postal Code: 518057  
Country: P.R. China  
Contact: Zhang Min  
Telephone: 021-68897541  
Fax: 021-50801070

### 1.4. Manufacturer Information

Company: ZTE CORPORATION  
Address: ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R. China  
City: Shenzhen  
Postal Code: 518057  
Country: P.R. China  
Telephone: 021-68897541  
Fax: 021-50801070

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**1.5. Information of EUT**

**General information**

Device Type:	Portable Device		
Exposure Category:	Uncontrolled Environment / General Population		
Product Name:	CDMA/GSM(GPRS) Dual-Mode Digital Mobile Phone		
SN:	000039485642710		
Device Operating Configurations:			
Supporting Mode(s):	GSM850; (tested) GSM1900; (tested) WCDMA Band II; (tested) WCDMA Band V; (tested) WIFI; (tested) BT; GSM900; GSM1800;		
Test Modulation:	(GSM)GMSK; (WCDMA)QPSK;		
GPRS Multislot Class:	12		
EGPRS Multislot Class:	12		
HSDPA UE Category:	8		
HSUPA UE Category:	6		
Operating Frequency Range(s):	Band	Tx (MHz)	Rx (MHz)
	GSM 850	824.2 ~ 848.8	869.2 ~ 893.8
	GSM 1900	1850.2 ~ 1909.8	1930.2 ~ 1989.8
	WCDMA Band II	1852.4 ~ 1907.6	1932.4 ~ 1987.6
	WCDMA Band V	826.4 ~ 846.6	871.4 ~ 891.6
Power Class:	GSM 850: 4, tested with power level 5		
	GSM 1900: 1, tested with power level 0		
	WCDMA Band II: 3, Power control is set "All Up Bits"		
	WCDMA Band V: 3, Power control is set "All Up Bits"		
Hardware Version:	p4pA		
Software Version:	P726USV1.0.0B01		
Antenna Type:	Internal Antenna		

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2010-0908

Page 8 of 185

### Auxiliary equipment details

#### AE1:Battery

Model: Li3710T42P3h553457  
Manufacturer: ZTE CORPORATION  
SN: 10091001201103111

#### AE2:Travel Adapter

Model: STC-A22O50I700M5-A  
Manufacturer: MADE IN CHINA BY RUIDE  
SN: /

Equipment Under Test (EUT) is a model of WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone with Bluetooth with internal antenna. The detail about Mobile phone, Lithium Battery and AC/DC Adapter is in chapter 1.5 in this report. SAR is tested for GSM850, GSM 1900, WCDMA Band II and WCDMA Band V.

The sample under test was selected by the Client.

Components list please refer to documents of the manufacturer.

### 1.6. The Maximum SAR<sub>1g</sub> Values and Conducted Power of each tested band

Band	SAR <sub>1g</sub> (W/kg)		Conducted Power(dBm)
	Head	Body	
GSM 850	<b>0.680</b>	<b>0.626</b>	<b>32.63</b>
GSM 1900	<b>1.050</b>	<b>0.301</b>	<b>29.72</b>
WCDMA Band II	<b>1.330</b>	<b>0.347</b>	<b>22.38</b>
WCDMA Band V	<b>0.644</b>	<b>0.487</b>	<b>22.71</b>
802.11b	<b>0.324</b>	<b>0.091</b>	<b>13.45</b>
802.11g	<b>0.319</b>	<b>0.118</b>	<b>14.08</b>

### 1.7. Test Date

The test is performed from June 24, 2010 to June 30, 2010.

## **2. Operational Conditions during Test**

### **2.1. General description of test procedures**

A communication link is set up with a System Simulator (SS) by air link, and a call is established. The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 128, 190 and 251 in the case of GSM 850, allocated to 512, 661 and 810 in the case of GSM 1900; allocated to 9262, 9400 and 9538 respectively in the case of WCDMA Band II, allocated to 4132, 4183 and 4233 respectively in the case of WCDMA Band V. The EUT is commanded to operate at maximum transmitting power. The client provided a program for SAR test, which enable engineer to control the frequency and output power of the handset.

Connection to the EUT is established via air interface with E5515C, and the EUT is set to maximum output power by E5515C. Using the E5515C Power control is set "All Up Bits" in SAR of WCDMA, the power lever is set to "5" in SAR of GSM 850, set to "0" in SAR of GSM 1900. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. The antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the EUT. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the EUT by at least 30 dB.

### **2.2. GSM Test Configuration**

SAR tests for GSM 850, GSM 1900, a communication link is set up with a System Simulator (SS) by air link. Using E5515C the power lever is set to "5" in SAR of GSM850, set to "0" in SAR of GSM1900. The test in the band of GSM 850, GSM 1900 are performed in the mode of speech transfer function and GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink. The EGPRS class is 12 for this EUT; it has at most 4 timeslots in uplink.

SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot. The allowed power reduction in the multi-slot configuration is as following:

**Table 1: The allowed power reduction in the multi-slot configuration**

<b>Number of timeslots in uplink assignment</b>	<b>Permissible nominal reduction of maximum output power,(dB)</b>
1	0
2	0 to 3,0
3	1,8 to 4,8
4	3,0 to 6,0

## **2.3. WCDMA Test Configuration**

### **2.3.1. Output power Verification**

Maximum output power is verified on the High, Middle and Low channel according to the procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC(transmit power control) set to all “1’s” for WCDMA/HSDPA or applying the required inner loop power control procedures to the maximum output power while HSUPA is active. Results for all applicable physical channel configuration (DPCCH, DPDCH<sub>n</sub> and spreading codes, HSDPA, HSPA) should be tabulated in the SAR report. All configuration that are not supported by the DUT or can not be measured due to technical or equipment limitations should be clearly identified.

### **2.3.2. Head SAR Measurements**

SAR for head exposure configurations in voice mode is measured using a 12.2kbps RMC with TPC bits configured to all “1’s”. SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2kbps AMR is less than 1/4 dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2kbps AMR with a 3.4 kbps SRB( Signaling radio bearer) using the exposure configuration that results in the highest SAR in 12.2kbps RMC for that RF channel.

### **2.3.3. Body SAR Measurements**

SAR for body exposure configurations in voice and data modes is measured using 12.2kbps RMC with TPC bits configured to all “1’s”. SAR for other spreading codes and multiple DPDCH<sub>n</sub>, when supported by the DUT, are not required when the maximum average output of each RF channel, for each spreading code and DPDCH<sub>n</sub> configuration, are less than 1/4 dB higher than those measured in 12.2kbps RMC. Otherwise, SAR is measured on the maximum output channel with an applicable RMC configuration for the corresponding spreading code or DPDCH<sub>n</sub> using the exposure configuration that results in the highest SAR with 12.2 kbps RMC. When more than 2 DPDCH<sub>n</sub> are supported by the DUT, it may be necessary to configure additional DPDCH<sub>n</sub> for a DUT using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

## **2.4. HSDPA Test Configuration**

SAR for body exposure configurations is measured according to the “Body SAR Measurements” procedures of that section. In addition, body SAR is also measured for HSDPA when the maximum average output of each RF channel with HSDPA active is at least 1/4 dB higher than that measured without HSDPA using 12.2kbps RMC or the maximum SAR 12.2kbps RMC is above 75% of the SAR limit. Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA.

HSDPA should be configured according to the UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV

# TA Technology (Shanghai) Co., Ltd.

## Test Report

coding sequence are defined by the H-set f. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors(  $\beta_c$ ,  $\beta_d$ ), and HS-DPCCH power offset parameters( $\Delta_{ACK}$ ,  $\Delta_{NACK}$ ,  $\Delta_{CQI}$ )should be set according to values indicated in the Table below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

**Table 2: Subtests for UMTS Release 5 HSDPA**

Sub-set	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}$ (note 1, note 2)	CM(dB) (note 3)	MPR(dB)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (note 4)	15/15 (note 4)	64	12/15 (note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI}=8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$

Note2:For the HS-DPCCH power mask requirement test in clause 5.2C,5.7A, and the Error Vector Magnitude(EVM) with HS-DPCCH test in clause 5.13.1.A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK}=8$  ( $A_{hs}=30/15$ ) with  $\beta_{hs}=30/15 * \beta_c$ , and  $\Delta_{CQI}=7$  ( $A_{hs}=24/15$ ) with  $\beta_{hs}=24/15 * \beta_c$ .

Note3: CM=1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4:For subtest 2 the  $\beta_c\beta_d$  ratio of 12/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC (TFC1,TF1) to  $\beta_c=11/15$  and  $\beta_d=15/15$ .

**Table 3: Settings of required H-Set 1 QPSK in HSDPA mode**

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	534
Inter-TTI Distance	TTI's	3
Number of HARQ Processes	Processes	2
Information Bit Payload ( $N_{INF}$ )	Bits	3202
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	4800
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	9600
Coding Rate		0.67
Number of Physical Channel Codes	Codes	5
Modulation	/	QPSK

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**Table 4: HSDPA UE category**

<b>HS-DSCH Category</b>	<b>Maximum HS-DSCH Codes Received</b>	<b>Minimum Inter-TTI Interval</b>	<b>Maximum Transport Bits/HS-DSCH</b>	<b>Total Channel</b>
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

## 2.5. HSUPA Test Configuration

Body SAR is also measured for HSPA when the maximum average output of each RF channel with HSPA active is at least  $\frac{1}{4}$  dB higher than that measured without HSPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 with power control algorithm 2, according to the highest body SAR configuration in 12.2 kbps RMC without HSPA.<sup>40</sup>

Due to inner loop power control requirements in HSPA, a commercial communication test set should be used for the output power and SAR tests.<sup>41</sup> The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA should be configured according to the  $\beta$  values indicated below as well as other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Devices' sections of 3 G device.

**Table 5: Sub-Test 5 Setup for Release 6 HSUPA**

Sub-set	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}^{(1)}$	$\beta_{ec}$	$\beta_{ed}$	$\beta_{ed}$ (SF)	$\beta_{ed}$ (codes)	CM (2) (dB)	MPR (dB)	AG <sup>(4)</sup> Index	E-TFCI
1	11/15 <sup>(3)</sup>	15/15 <sup>(3)</sup>	64	11/15 <sup>(3)</sup>	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 <sup>(4)</sup>	15/15 <sup>(4)</sup>	64	15/15 <sup>(4)</sup>	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-

DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the

signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the

signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ .

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Figure 5.1g.

Note 6:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**Table 6: HSUPA UE category**

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI (ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	2	2 SF2 & 2 SF4	11484	5.76
	4	4	10		20000	2.00
7 (No DPDCH)	4	8	2	2 SF2 & 2 SF4	22996	?
	4	4	10		20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4.

UE Categories 1 to 6 supports QPSK only. UE Category 7 supports QPSK and 16QAM.  
(TS25.306-7.3.0)

# TA Technology (Shanghai) Co., Ltd. Test Report

## 2.6. WIFI Test Configuration

For the 802.11b/g SAR tests, a communication link is set up with the test mode software for WIFI mode test. The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 1, 6 and 11 respectively in the case of 2450 MHz. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode.

802.11b/g operating modes are tested independently according to the service requirements in each frequency band. 802.11b/g modes are tested on channels 1, 6, 11; however, if output power reduction is necessary for channels 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels must be tested instead.

SAR is not required for 802.11g channels when the maximum average output power is less than 0.25dB higher than that measured on the corresponding 802.11b channels. When the maximum average output channel in each frequency band is not included in the "default test channels", the maximum channel should be tested instead of an adjacent "default test channels", these are referred to as the "required test channels" and are illustrated in table 1.

And according to the "3 dB rule" FCC Public Notice, DA 02-1948, June 19.2002 " **If the SAR measured at the middle channel for each test configuration is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s)".**

Then The Absolute Radio Frequency Channel Number (ARFCN) is firstly allocated to 2437 respectively in the case of 802.11b/g.

**Table 7: "Default Test Channels"**

Mode	GHz	Channel	Turbo Channel	"Default Test Channels"			
				15.247		UNII	
				802.11b	802.11g		
802.11b/g	2.412	1 <sup>#</sup>		✓	*		
	2.437	6	6	✓	*		
	2.462	11 <sup>#</sup>		✓	*		

Note: <sup>#</sup>=when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

✓= " default test channels"

\* =possible 802.11g channels with maximum average output 0.25dB>=the "default test channels"

### 3. SAR Measurements System Configuration

#### 3.1. SAR Measurement Set-up

The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY4 measurement server.
- The DASY4 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003
- DASY4 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System validation dipoles allowing to validate the proper functioning of the system.

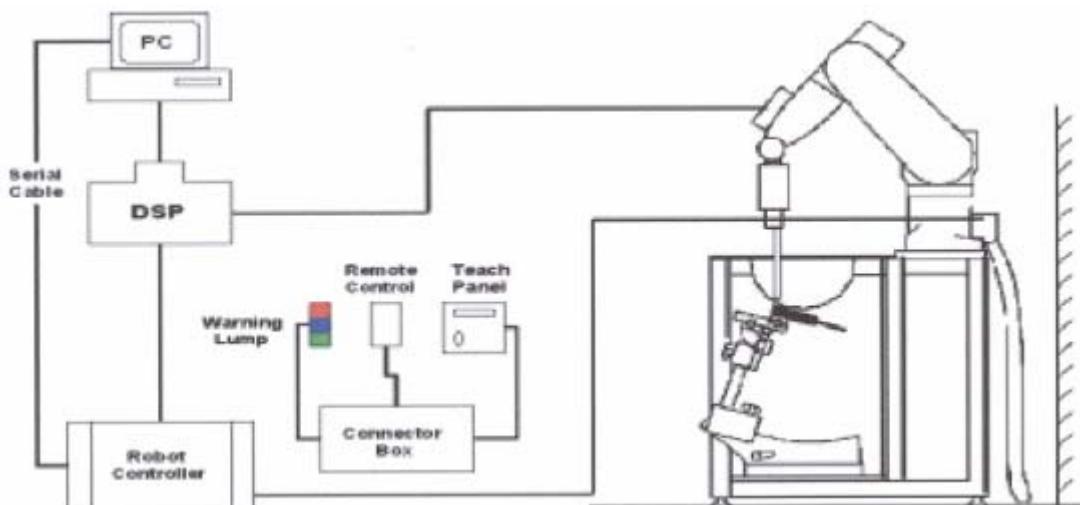


Figure 1. SAR Lab Test Measurement Set-up

### 3.2. DASY4 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

#### 3.2.1. EX3DV4 Probe Specification

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 835, HSL 900, HSL 1750 and HSL 1950 Additional CF for other liquids and frequencies upon request
Frequency	10 MHz to > 6 GHz Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)
Directivity	$\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 $\mu$ W/g to > 100 mW/g Linearity: $\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.



**Figure 2. EX3DV4 E-field Probe**



**Figure 3. EX3DV4 E-field probe**

### 3.2.2. E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm$  10%. The spherical isotropy was evaluated and found to be better than  $\pm$  0.25dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where:  $\Delta t$  = Exposure time (30 seconds),  
C = Heat capacity of tissue (brain or muscle),  
 $\Delta T$  = Temperature increase due to RF exposure.

Or

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:  
 $\sigma$  = Simulated tissue conductivity,  
 $\rho$  = Tissue density (kg/m<sup>3</sup>).

### 3.3. Other Test Equipment

#### 3.3.1. Device Holder for Transmitters

The DASY device holder is designed to cope with the die rent positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the inference of the clamp on the test results could thus be lowered.



Figure 4. Device Holder

### 3.3.2. Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden Figure. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness	2±0.1 mm
Filling Volume	Approx. 20 liters
Dimensions	810 x 1000 x 500 mm (H x L x W)
Available	Special



Figure 5.Generic Twin Phantom

### 3.4. Scanning procedure

The DASY4 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max.  $\pm 5\%$ .
- The “surface check” measurement tests the optical surface detection system of the DASY4 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above  $\pm 0.1\text{mm}$ ). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within  $\pm 30^\circ$ .)
- Area Scan  
The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid

# TA Technology (Shanghai) Co., Ltd.

## Test Report

spacing of 15 mm x 15 mm is set. During the scan the distance of the probe to the phantom remains unchanged.

After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

- **Zoom Scan**

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by 7x7x7 points within a cube whose base is centered around the maxima found in the preceding area scan.

- **Spatial Peak Detection**

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY4 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space. They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using 7x7x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1g and 10g cubes.

- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x7 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

### **3.5. Data Storage and Evaluation**

#### **3.5.1. Data Storage**

The DASY4 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DA4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm<sup>2</sup>], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

#### **3.5.2. Data Evaluation by SEMCAD**

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm <sub>i</sub> , $a_{i0}$ , $a_{i1}$ , $a_{i2}$
	- Conversion factor	Conv $F_i$
	- Diode compression point	Dcp <sub>i</sub>

Device parameters:	- Frequency	f
	- Crest factor	cf

Media parameters:	- Conductivity	
	- Density	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY4 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal,

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2010-0908

Page 22 of 185

the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c_f / d_{cp_i}$$

With  $V_i$  = compensated signal of channel i (i = x, y, z)

$U_i$  = input signal of channel i (i = x, y, z)

$c_f$  = crest factor of exciting field (DASY parameter)

$d_{cp_i}$  = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:  $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes:  $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2) / f$

With  $V_i$  = compensated signal of channel i (i = x, y, z)

$Norm_i$  = sensor sensitivity of channel i (i = x, y, z)

[mV/(V/m)<sup>2</sup>] for E-field Probes

$ConvF$  = sensitivity enhancement in solution

$a_{ij}$  = sensor sensitivity factors for H-field probes

$f$  = carrier frequency [GHz]

$E_i$  = electric field strength of channel i in V/m

$H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot .) / ( \cdot 1000)$$

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

with **SAR** = local specific absorption rate in mW/g

**E<sub>tot</sub>** = total field strength in V/m

$\sigma$  = conductivity in [mho/m] or [Siemens/m]

$\rho$  = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with  $P_{pwe}$  = equivalent power density of a plane wave in mW/cm<sup>2</sup>

**E<sub>tot</sub>** = total electric field strength in V/m

**H<sub>tot</sub>** = total magnetic field strength in A/m

### 3.6. System check

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulates were measured every day using the dielectric probe kit and the network analyzer. A system check measurement was made following the determination of the dielectric parameters of the simulates, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system check results (dielectric parameters and SAR values) are given in the table 14 and table 15.

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ( $\pm 10\%$ ).

System check is performed regularly on all frequency bands where tests are performed with the DASY4 system.

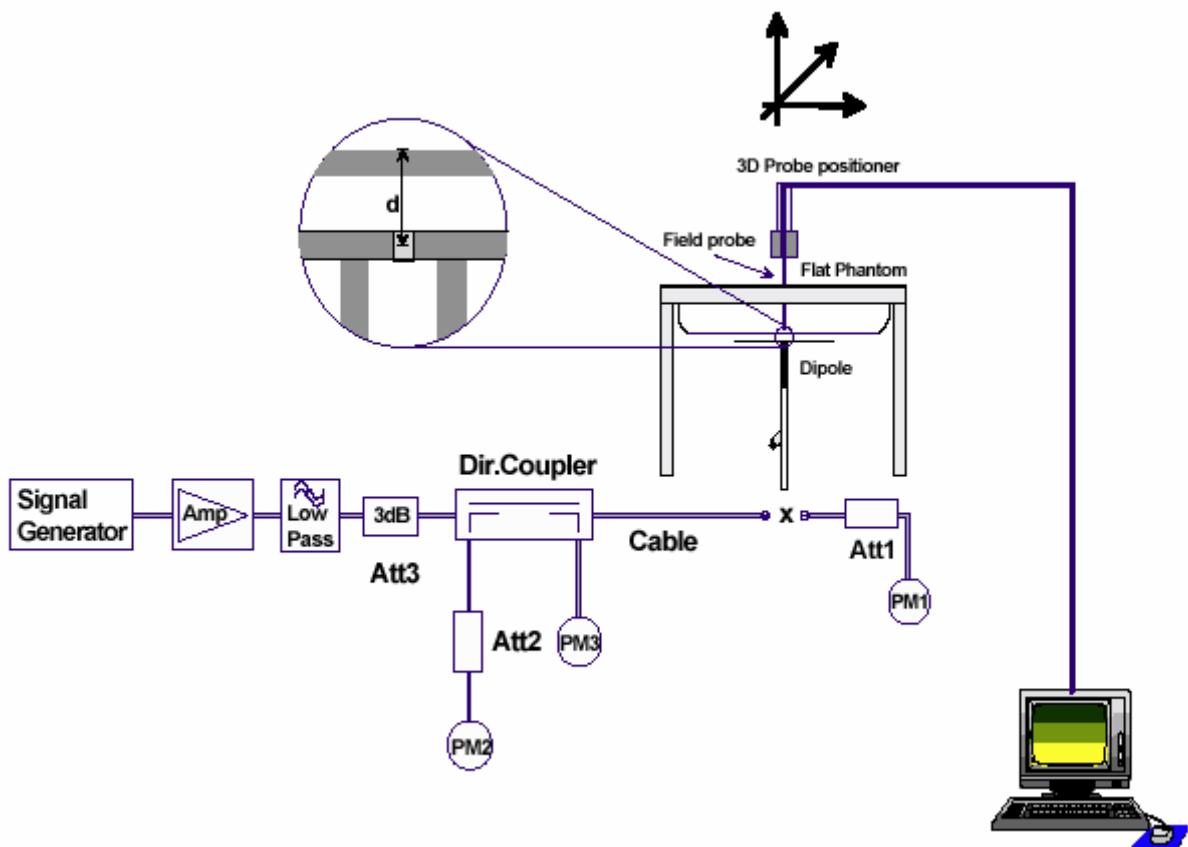


Figure 6. System Check Set-up

# TA Technology (Shanghai) Co., Ltd.

## Test Report

### 3.7. Equivalent Tissues

The liquid is consisted of water, salt, Glycol, Sugar, Preventol and Cellulose. The liquid has previously been proven to be suited for worst-case. The Table 8 and Table 9 show the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the OET 65.

**Table 8: Composition of the Head Tissue Equivalent Matter**

MIXTURE%	FREQUENCY(Brain) 835MHz		
Water	41.45		
Sugar	56		
Salt	1.45		
Preventol	0.1		
Cellulose	1.0		
Dielectric Parameters Target Value	$f=835\text{MHz}$ $\epsilon=41.5$ $\sigma=0.9$		

MIXTURE%	FREQUENCY(Brain)1900MHz		
Water	55.242		
Glycol monobutyl	44.452		
Salt	0.306		
Dielectric Parameters Target Value	$f=1900\text{MHz}$ $\epsilon=40.0$ $\sigma=1.40$		

MIXTURE%	FREQUENCY 2450MHz		
Water	62.7		
Glycol	36.8		
Salt	0.5		
Dielectric Parameters Target Value	$f=2450\text{MHz}$ $\epsilon=39.20$ $\sigma=1.80$		

**Table 9: Composition of the Body Tissue Equivalent Matter**

MIXTURE%	FREQUENCY(Body)835MHz		
Water	52.5		
Sugar	45		
Salt	1.4		
Preventol	0.1		
Cellulose	1.0		
Dielectric Parameters Target Value	$f=835\text{MHz}$ $\epsilon=55.2$ $\sigma=0.97$		

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0908

Page 26 of 185

MIXTURE%	FREQUENCY (Body) 1900MHz
Water	69.91
Glycol monobutyl	29.96
Salt	0.13
Dielectric Parameters	f=1900MHz $\epsilon=53.3$ $\sigma=1.52$
Target Value	

MIXTURE%	FREQUENCY 2450MHz
Water	73.2
Glycol	26.7
Salt	0.1
Dielectric Parameters	f=2450MHz $\epsilon=52.70$ $\sigma=1.95$
Target Value	

#### 4. Laboratory Environment

**Table 10: The Ambient Conditions during Test**

Temperature	Min. = 20°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 $\Omega$
Ambient noise is checked and found very low and in compliance with requirement of standards.	
Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

## **5. Characteristics of the Test**

### **5.1. Applicable Limit Regulations**

**IEEE Std C95.1, 1999:** IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

### **5.2. Applicable Measurement Standards**

**IEEE Std 1528™-2003:** IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

**SUPPLEMENT C Edition 01-01 to OET BULLETIN 65 Edition 97-01 June 2001 including DA 02-1438 June 19, 2002:** Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields Additional Information for Evaluation Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions.

## 6. Conducted Output Power Measurement

### 6.1. Summary

The DUT is tested using an E5515C communications tester as controller unit to set test channels and maximum output power to the DUT, as well as for measuring the conducted power.

Conducted output power was measured using an integrated RF connector and attached RF cable. This result contains conducted output power for the EUT.

### 6.2. Conducted Power Results

**Table 11: Conducted Power Measurement Results**

<b>GSM 850</b>		<b>Conducted Power(dBm)</b>		
		Channel 128	Channel 190	Channel 251
Before Test		32.53	32.63	32.61
After Test		32.52	32.62	32.60
<b>GSM 1900</b>		<b>Conducted Power(dBm)</b>		
		Channel 512	Channel 661	Channel 810
Before Test		29.72	29.67	29.54
After Test		29.71	29.66	29.53
<b>WCDMA Band II</b>		<b>Conducted Power(dBm)</b>		
		Channel 9262	Channel 9400	Channel 9538
12.2kbps RMC	Before Test	22.38	22.34	22.04
	After Test	22.37	22.33	22.03
64kbps RMC	Before Test	22.36	22.33	22.02
	After Test	22.34	22.31	22.01
144kbps RMC	Before Test	22.34	22.31	22.00
	After Test	22.33	22.29	21.99
384kbps RMC	Before Test	22.32	22.28	21.99
	After Test	22.30	22.27	21.97
<b>WCDMA Band II HSDPA</b>		<b>Conducted Power(dBm)</b>		
		Channel 9262	Channel 9400	Channel 9538
Sub - Test 1	Before Test	22.23	22.27	21.94
	After Test	22.22	22.25	21.96
Sub - Test 2	Before Test	22.13	22.10	21.83
	After Test	22.12	22.08	21.81
Sub - Test 3	Before Test	21.68	21.55	21.39
	After Test	21.66	21.56	21.37

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Sub - Test 4	Before Test	21.62	21.5	21.31
	After Test	21.61	21.51	21.33
WCDMA Band II HSUPA		<b>Conducted Power(dBm)</b>		
		Channel 9262	Channel 9400	Channel 9538
Sub Test - 1	Before Test	20.82	20.53	20.2
	After Test	20.81	20.54	20.21
Sub Test - 2	Before Test	20.16	20.5	19.95
	After Test	20.17	20.49	19.94
Sub Test - 3	Before Test	20.52	20.59	20.16
	After Test	20.53	20.58	20.15
Sub Test - 4	Before Test	19.96	20.6	20.08
	After Test	19.96	20.59	20.07
Sub Test - 5	Before Test	20.72	20.39	20.2
	After Test	20.71	20.4	20.21
WCDMA Band V		<b>Conducted Power(dBm)</b>		
		Channel 4132	Channel 4183	Channel 4233
12.2kbps RMC	Before Test	22.49	22.71	22.54
	After Test	22.48	22.70	22.53
64kbps RMC	Before Test	22.48	22.69	22.52
	After Test	22.46	22.69	22.51
144kbps RMC	Before Test	22.45	22.67	22.51
	After Test	22.44	22.66	22.49
384kbps RMC	Before Test	22.43	22.65	22.48
	After Test	22.43	22.64	22.48
WCDMA Band V+HSDPA		<b>Conducted Power(dBm)</b>		
		Channel 4132	Channel 4183	Channel 4233
Sub - Test 1	Before Test	22.34	22.64	22.44
	After Test	22.33	22.62	22.46
Sub - Test 2	Before Test	22.24	22.47	22.33
	After Test	22.23	22.45	22.31
Sub - Test 3	Before Test	21.79	21.92	21.89
	After Test	21.77	21.93	21.87
Sub - Test 4	Before Test	21.73	21.87	21.81
	After Test	21.72	21.88	21.83
WCDMA Band V HSUPA		<b>Conducted Power(dBm)</b>		
		Channel 4132	Channel 4183	Channel 4233
Sub Test - 1	Before Test	20.93	20.90	20.70
	After Test	20.92	20.91	20.71
Sub Test - 2	Before Test	20.27	20.87	20.45

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0908

Page 30 of 185

	After Test	20.28	20.86	20.44
Sub Test - 3	Before Test	20.63	20.96	20.66
	After Test	20.64	20.95	20.65
Sub Test - 4	Before Test	20.07	20.97	20.58
	After Test	20.07	20.96	20.57
Sub Test - 5	Before Test	20.83	20.76	20.70
	After Test	20.82	20.77	20.71

**Average Power**

<b>GSM 850+GPRS</b>		<b>Conducted Power(dBm)</b>						
		CH128	CH190	CH251		CH128	CH190	CH251
1 timeslot	Before Test	32.49	32.60	32.60	-9.03dB	23.46	23.57	23.57
	After Test	32.50	32.59	32.55	-9.03dB	23.47	23.56	23.52
2 timeslots	Before Test	30.52	30.62	30.6	-6.02dB	<b>24.50</b>	<b>24.60</b>	<b>24.58</b>
	After Test	30.53	30.59	30.58	-6.02dB	<b>24.51</b>	<b>24.57</b>	<b>24.56</b>
3 timeslots	Before Test	28.62	28.72	28.68	-4.26dB	24.36	24.46	24.42
	After Test	28.61	28.68	28.65	-4.26dB	24.35	24.42	24.39
4 timeslots	Before Test	27.51	27.58	27.57	-3.01dB	24.50	24.57	24.56
	After Test	27.51	27.57	27.54	-3.01dB	24.50	24.56	24.53
<b>GSM 850+EGPRS</b>		<b>Conducted Power(dBm)</b>						
		CH128	CH190	CH251		CH128	CH190	CH251
1 timeslot	Before Test	32.5	32.59	32.55	-9.03dB	23.47	23.56	23.52
	After Test	32.51	32.58	32.54	-9.03dB	23.48	23.55	23.51
2 timeslots	Before Test	30.53	30.59	30.55	-6.02dB	<b>24.51</b>	<b>24.57</b>	<b>24.53</b>
	After Test	30.52	30.58	30.54	-6.02dB	<b>24.50</b>	<b>24.56</b>	<b>24.52</b>
3 timeslots	Before Test	28.61	28.68	28.65	-4.26dB	24.35	24.42	24.39
	After Test	28.6	28.67	28.64	-4.26dB	24.34	24.41	24.38
4 timeslots	Before Test	27.51	27.57	27.54	-3.01dB	24.50	24.56	24.53
	After Test	27.5	27.56	27.53	-3.01dB	24.49	24.55	24.52
<b>GSM 1900+GPRS</b>		<b>Conducted Power(dBm)</b>						
		CH512	CH661	CH810		CH512	CH661	CH810
1 timeslot	Before Test	29.68	29.64	29.49	-9.03dB	20.65	20.61	20.46

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0908

Page 31 of 185

	After Test	29.67	29.62	29.48	-9.03dB	20.64	20.59	20.45
2 timeslots	Before Test	27.64	27.62	27.47	-6.02dB	21.62	21.60	21.45
	After Test	27.63	27.59	27.45	-6.02dB	21.61	21.57	21.43
3 timeslots	Before Test	25.78	25.75	25.62	-4.26dB	21.52	21.49	21.36
	After Test	25.77	25.74	25.59	-4.26dB	21.51	21.48	21.33
4 timeslots	Before Test	24.63	24.61	24.48	-3.01dB	<b>21.62</b>	<b>21.60</b>	<b>21.47</b>
	After Test	24.61	24.59	24.47	-3.01dB	<b>21.60</b>	<b>21.58</b>	<b>21.46</b>
<b>GSM 1900+EGPRS</b>		<b>Conducted Power(dBm)</b>						
		CH512	CH661	CH810		CH512	CH661	CH810
1 timeslot	Before Test	29.64	29.58	29.44	-9.03dB	20.61	20.55	20.41
	After Test	29.63	29.57	29.43	-9.03dB	20.6	20.54	20.4
2 timeslots	Before Test	27.58	27.55	27.43	-6.02dB	21.56	21.53	21.41
	After Test	27.57	27.54	27.42	-6.02dB	21.55	21.52	21.4
3 timeslots	Before Test	25.72	25.71	25.58	-4.26dB	21.46	21.45	21.32
	After Test	25.71	25.7	25.57	-4.26dB	21.45	21.44	21.31
4 timeslots	Before Test	24.59	24.56	24.43	-3.01dB	<b>21.58</b>	<b>21.55</b>	<b>21.42</b>
	After Test	24.58	24.55	24.42	-3.01dB	<b>21.57</b>	<b>21.54</b>	<b>21.41</b>

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

## 7. Test Results

### 7.1. Dielectric Performance

**Table 12: Dielectric Performance of Head Tissue Simulating Liquid**

Frequency	Description	Dielectric Parameters		Temp °C
		$\epsilon_r$	$\sigma(s/m)$	
835MHz (head)	Target value ±5% window	41.50 39.43 — 43.58	0.90 0.86 — 0.95	/
	Measurement value 2010-6-24	42.06	0.93	
1900MHz (head)	Target value 5% window	40.0 38 — 42	1.40 1.33 — 1.47	/
	Measurement value 2010-6-24	40.19	1.42	
2450MHz (head)	Target value ±5% window	39.20 37.24 — 41.16	1.80 1.71 — 1.89	/
	Measurement value 2010-6-29	38.81	1.79	

**Table 13: Dielectric Performance of Body Tissue Simulating Liquid**

Frequency	Description	Dielectric Parameters		Temp °C
		$\epsilon_r$	$\sigma(s/m)$	
835MHz (body)	Target value ±5% window	55.20 52.44 — 57.96	0.97 0.92 — 1.02	/
	Measurement value 2010-6-25	54.67	1.00	
1900MHz (body)	Target value ±5% window	53.3 50.64 — 55.97	1.52 1.44 — 1.60	/
	Measurement value 2010-6-25	53.01	1.56	
2450MHz (body)	Target value ±5% window	52.70 50.07 — 55.34	1.95 1.85 — 2.05	/
	Measurement value 2010-6-29	51.83	1.92	

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

## 7.2. System Check Results

**Table 14: System Check for Head tissue simulation liquid**

Frequency	Description	SAR(W/kg)		Dielectric Parameters		Temp
		10g	1g	$\epsilon_r$	$\sigma(s/m)$	
835MHz	Recommended result ±10% window	1.58 1.42 - 1.74	2.42 2.18 - 2.66	40.5	0.89	/
	Measurement value 2010-6-24	1.62	2.48	42.06	0.93	21.9
1900MHz	Recommended result 10% window	5.49 4.94 - 6.04	10.5 9.45 - 11.55	40.9	1.43	/
	Measurement value 2010-6-24	5.46	10.6	40.19	1.42	22.1
2450 MHz	Recommended result ±10% window	6.24 5.62 - 6.86	13.3 11.97 - 14.63	38.7	1.77	/
	Measurement value 2010-6-29	6.50	14.05	38.81	1.79	21.7

Note: 1. the graph results see ANNEX B.

2. Recommended Values used derive from the calibration certificate and 250 mW is used as feeding power to the calibrated dipole.

**Table 15: System Check for Body tissue simulation liquid**

Frequency	Description	SAR(W/kg)		Dielectric Parameters		Temp
		10g	1g	$\epsilon_r$	$\sigma(s/m)$	
835MHz	Recommended result ±10% window	1.68 1.51 - 1.85	2.56 2.30 - 2.82	53	0.99	/
	Measurement value 2010-6-25	1.68	2.56	54.67	1.00	21.9
1900 MHz	Recommended result ±10% window	5.61 5.05 - 6.17	10.7 9.63- 11.77	53.6	1.55	/
	Measurement value 2010-6-25	5.17	9.73	53.01	1.56	21.7
2450 MHz	Recommended result ±10% window	5.97 5.37 - 6.57	13.00 11.70 - 14.30	51.80	2.01	/
	Measurement value 2010-6-29	6.46	14.00	51.83	1.92	21.7

Note: 1. The graph results see ANNEX B.

2. Target Values used derive from the calibration certificate and 250 mW is used as feeding power to the Calibrated dipole.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

### 7.3. Test Results

#### 7.3.1. GSM850 (GPRS/EGPRS)

Table 16: SAR Values (GSM850/GPRS/EGPRS)

Limit of SAR		10 g Average		1g Average	Power Drift	Graph Results	
		2.0 W/kg	1.6 W/kg	± 0.21dB			
Different Test Position	Channel	Measurement Result(W/kg)		Power Drift(dB)			
		10 g Average	1g Average				
<b>Test position of Head</b>							
Left hand, Touch cheek	High	0.488	0.680	0.084	Figure 13		
	Middle	0.423	0.587	-0.077	Figure 14		
	Low	0.418	0.581	0.120	Figure 15		
Left hand, Tilt 15 Degree	Middle	0.224	0.299	-0.005	Figure 16		
Right hand, Touch cheek	Middle	0.404	0.556	0.047	Figure 17		
Right hand, Tilt 15 Degree	Middle	0.243	0.327	0.021	Figure 18		
<b>Test position of Body (Distance 15mm)</b>							
Towards Ground	High	0.371	0.520	-0.064	Figure 19		
	Middle	0.308	0.432	0.036	Figure 20		
	Low	0.285	0.400	0.106	Figure 21		
Towards phantom	Middle	0.241	0.331	0.142	Figure 22		
<b>Worst case position of Body with Earphone (Distance 15mm)</b>							
Towards Ground	High	0.315	0.440	0.193	Figure 23		
<b>Worst case position of Body with GPRS (2Up, Distance 15mm)</b>							
Towards Ground	High	0.444	0.626	0.037	Figure 24		
<b>Worst case position of Body with EGPRS(2Up, Distance 15mm)</b>							
Towards Ground	High	0.426	0.605	-0.159	Figure 25		

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. Upper and lower frequencies were measured at the worst position.
3. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the  $SAR_{1g}$  limit ( $< 0.8W/kg$ ), testing at the high and low channels is optional.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**7.3.2. GSM1900 (GPRS/EGPRS)**

**Table 17: SAR Values (GSM1900/GPRS/EGPRS)**

Limit of SAR		10 g Average		1g Average	Power Drift	Graph Results	
		2.0 W/kg	1.6 W/kg	± 0.21dB			
Different Test Position	Channel	Measurement Result(W/kg)		Power Drift(dB)			
		10 g Average	1g Average				
<b>Test position of Head</b>							
Left hand, Touch cheek	Middle	0.408(max.cube)	0.730(max.cube)	-0.080	Figure 26		
Left hand, Tilt 15 Degree	Middle	0.144	0.240	0.026	Figure 27		
Right hand, Touch cheek	High	0.349	0.671	0.049	Figure 28		
	Middle	0.434	0.828	0.028	Figure 29		
	Low	0.557	1.050	0.166	Figure 30		
Right hand, Tilt 15 Degree	Middle	0.154	0.244	0.067	Figure 31		
<b>Test position of Body (Distance 15mm)</b>							
Towards Ground	High	0.097	0.166	0.018	Figure 32		
	Middle	0.124	0.214	-0.065	Figure 33		
	Low	0.169	0.291	-0.167	Figure 34		
Towards phantom	Middle	0.099(max.cube)	0.170(max.cube)	0.079	Figure 35		
<b>Worst case position of Body with Earphone (Distance 15mm)</b>							
Towards Ground	Low	0.174	0.301	-0.012	Figure 36		
<b>Test position of Body with GPRS (4Up, Distance 15mm)</b>							
Towards Ground	Low	0.175	0.298	-0.105	Figure 37		
<b>Worst case position of Body with EGPRS(4Up, Distance 15mm)</b>							
Towards Ground	Low	0.173	0.296	-0.091	Figure 38		

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. Upper and lower frequencies were measured at the worst position.
3. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the  $SAR_{1g}$  limit ( $< 0.8W/kg$ ), testing at the high and low channels is optional.
4. The (max.cube) labeling indicates that during the grid scanning an additional peak was found which was within 2.0dB of the highest peak. The value of the highest cube is given in the table above; the value from the second assessed cube is given in the SAR distribution plots (See ANNEX C).

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**7.3.3. WCDMA Band II (WCDMA/HSDPA/HSUPA)**

**Table 18: SAR Values (WCDMA Band II/WCDMA/HSDPA/HSUPA)**

Limit of SAR		10 g Average	1g Average	Power Drift	Graph Results
		2.0 W/kg	1.6 W/kg	± 0.21dB	
Different Test Position	Channel	Measurement Result(W/kg)		Power Drift(dB)	
		10 g Average	1 g Average		
<b>Test position of Head</b>					
Left hand, Touch cheek	High	0.501(max.cube)	0.902(max.cube)	-0.006	Figure 39
	Middle	0.589	1.060	0.050	Figure 40
	Low	0.643	1.140	0.082	Figure 41
Left hand, Tilt 15 Degree	Middle	0.226	0.376	0.017	Figure 42
Right hand, Touch cheek	High	0.563	1.080	0.045	Figure 43
	Middle	0.622	1.180	-0.043	Figure 44
	Low	0.710	1.330	0.056	Figure 45
Right hand, Tilt 15 Degree	Middle	0.232	0.368	0.081	Figure 46
<b>Test Case of Body (Distance 15mm)</b>					
Towards Ground	High	0.148	0.251	0.139	Figure 47
	Middle	0.168	0.288	0.119	Figure 48
	Low	0.202	0.347	-0.009	Figure 49
Towards Phantom	Middle	0.149(max.cube)	0.255(max.cube)	0.148	Figure 50
<b>Worst case position of Body with Earphone (Distance 15mm)</b>					
Towards Ground	Low	0.156(max.cube)	0.263(max.cube)	0.190	Figure 51
<b>Worst case position of Body with HSDPA (Distance 15mm)</b>					
Towards Ground	Low	0.184	0.314	0.069	Figure 52
<b>Worst case position of Body with HSUPA (Distance 15mm)</b>					
Towards Ground	Low	0.159	0.278	-0.068	Figure 53

**Note:** 1. The value with blue color is the maximum SAR Value of each test band.

2. Upper and lower frequencies were measured at the worst position.
3. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the  $SAR_{1g}$  limit ( $< 0.8W/kg$ ), testing at the high and low channels is optional.
4. The (max.cube) labeling indicates that during the grid scanning an additional peak was found which was within 2.0dB of the highest peak. The value of the highest cube is given in the table above; the value from the second assessed cube is given in the SAR distribution plots (See ANNEX C).

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**7.3.4. WCDMA Band V (WCDMA/HSDPA/HSUPA)**

**Table 19: SAR Values (WCDMA Band V/WCDMA/HSDPA/HSUPA)**

Limit of SAR		10 g Average	1g Average	Power Drift	Graph Results	
		2.0 W/kg	1.6 W/kg	± 0.21dB		
Different Test Position	Channel	Measurement Result(W/kg)		Power Drift(dB)		
		10 g Average	1 g Average			
<b>Test position of Head</b>						
Left hand, Touch cheek	High	0.462	<b>0.644</b>	0.021	Figure 54	
	Middle	0.455	0.633	0.000	Figure 55	
	Low	0.329	0.452	0.036	Figure 56	
Left hand, Tilt 15 Degree	Middle	0.234	0.313	0.078	Figure 57	
Right hand, Touch cheek	Middle	0.412	0.555	-0.133	Figure 58	
Right hand, Tilt 15 Degree	Middle	0.209	0.280	0.095	Figure 59	
<b>Test Case of Body (Distance 15mm)</b>						
Towards Ground	High	0.343	0.480	0.150	Figure 60	
	Middle	0.304	0.424	0.047	Figure 61	
	Low	0.235	0.329	-0.163	Figure 62	
Towards Phantom	Middle	0.260	0.358	0.100	Figure 63	
<b>Worst case position of RMC with Earphone (Distance 15mm)</b>						
Towards Ground	High	0.245	0.342	0.198	Figure 64	
<b>Worst case position of Body with HSDPA (Distance 15mm)</b>						
Towards Ground	High	0.347	<b>0.487</b>	-0.138	Figure 65	
<b>Worst case position of Body with HSUPA (Distance 15mm)</b>						
Towards Ground	High	0.327	0.460	-0.026	Figure 66	

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. Upper and lower frequencies were measured at the worst position.
3. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the  $SAR_{1g}$  limit ( $< 0.8W/kg$ ), testing at the high and low channels is optional.

# TA Technology (Shanghai) Co., Ltd.


## Test Report

Report No. RZA2010-0908

Page 38 of 185

### 7.3.5. BT/WIFI function

The distance between BT/WIFI antenna and main antenna is >5cm. The location of the antennas inside mobile phone is shown below:

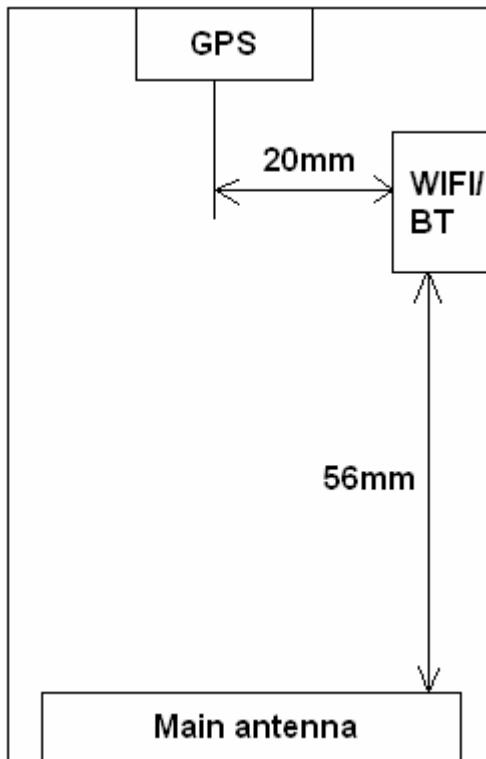

The output power of BT antenna is as following:

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz
GFSK Test result (dBm)	-3.10	-2.25	-3.23
EDR2M-4_DQPSK Test result (dBm)	-1.24	-0.18	-1.26
EDR3M-8DPSK Test result (dBm)	-1.37	-0.23	-1.31

According to the output power measurement result and the distance between BT/WIFI antenna and main antenna we can draw the conclusion that: stand-alone SAR is not required for BT transmitter, because the output power of BT transmitter is  $\leq 2P_{Ref}$  and its antenna is  $\geq 5cm$  from other antenna.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

The output power of WIFI antenna is as following:

Channel	Channel 1 (2412MHz)	Channel 6 (2437MHz)	Channel 11 (2462MHz)
802.11b(dBm)	13.44	13.24	13.45
802.11g(dBm)	14.08	13.99	13.89

**Table 20: SAR Values (802.11b)**

Limit of SAR		10 g Average	1g Average	Power Drift	Graph Results	
		2.0 W/kg	1.6 W/kg	± 0.21dB		
Different Test Position	Channel	Measurement Result(W/kg)		Power Drift(dB)		
		10 g Average	1g Average			
<b>Test position of Head</b>						
Left hand, Touch cheek	Middle	0.126	0.253	0.159	Figure 67	
Left hand, Tilt 15 Degree	High	0.157	0.324	0.045	Figure 68	
	Middle	0.151	0.315	-0.016	Figure 69	
	Low	0.151	0.311	0.119	Figure 70	
Right hand, Touch cheek	Middle	0.114	0.207	0.015	Figure 71	
Right hand, Tilt 15 Degree	Middle	0.135	0.270	0.043	Figure 72	
<b>Test position of Body (Distance 15mm)</b>						
Towards Ground	Middle	0.043	0.076	-0.068	Figure 73	
Towards phantom	High	0.050	0.091	0.021	Figure 74	
	Middle	0.043	0.079	-0.023	Figure 75	
	Low	0.045	0.083	-0.156	Figure 76	

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. Upper and lower frequencies were measured at the worst position.
3. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8W/kg), testing at the high and low channels is optional.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**Table 21: SAR Values (802.11g)**

Limit of SAR		10 g Average	1g Average	Power Drift	Graph Results	
		2.0 W/kg	1.6 W/kg	± 0.21dB		
Different Test Position	Channel	Measurement Result(W/kg)		Power Drift (dB)		
		10 g Average	1g Average			
<b>Test position of Head</b>						
Left hand, Touch cheek	Middle	0.125	0.252	0.153	Figure 77	
Left hand, Tilt 15 Degree	High	0.137	0.286	0.067	Figure 78	
	Middle	0.157	0.319	0.039	Figure 79	
	Low	0.130	0.272	0.028	Figure 80	
Right hand, Touch cheek	Middle	0.100	0.197	0.005	Figure 81	
Right hand, Tilt 15 Degree	Middle	0.135	0.270	0.042	Figure 82	
<b>Test position of Body (Distance 15mm)</b>						
Towards Ground	High	0.067	0.118	0.025	Figure 83	
	Middle	0.065	0.113	-0.029	Figure 84	
	Low	0.063	0.109	-0.020	Figure 85	
Towards phantom	Middle	0.062	0.113	-0.133	Figure 86	

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. Upper and lower frequencies were measured at the worst position.
3. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8W/kg), testing at the high and low channels is optional.

#### **Simultaneous transmission SAR**

Because the distance between the main antenna and BT/Wifi antenna is ( 5.6cm) > 5cm, and total the maximum 1g SAR for main antenna and Wifi antenna is 1.654 W/kg, greater than 1.6 W/kg, SAR-to-antenna ratio for Wifi and main antenna is  $(1.33+0.319)/5.6=0.29<0.3$ , So the Simultaneous transmission SAR are not required for Wifi transmitter and main antenna. Because the stand-alone SAR is not required for BT transmitter, so the simultaneous transmission SAR are not required for BT transmitter and main antenna. And BT and wifi don't transfer simultaneously.

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2010-0908

Page 41 of 185

## 8. Measurement Uncertainty

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0908

Page 42 of 185

20	-phantom	B	4.0	R	$\sqrt{3}$	1	2.3	$\infty$
21	-liquid conductivity (deviation from target)	B	5.0	R	$\sqrt{3}$	0.6 4	1.8	$\infty$
22	-liquid conductivity (measurement uncertainty)	B	5.0	N	1	0.6 4	3.2	$\infty$
23	-liquid permittivity (deviation from target)	B	5.0	R	$\sqrt{3}$	0.6	1.7	$\infty$
24	-liquid permittivity (measurement uncertainty)	B	5.0	N	1	0.6	3.0	$\infty$
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$					12.0	
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$		N	k=2		24.0	

## 9. Main Test Instruments

**Table 22: List of Main Instruments**

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	Agilent 8753E	US37390326	September 13, 2009	One year
02	Dielectric Probe Kit	Agilent 85070E	US44020115	No Calibration Requested	
03	Power meter	Agilent E4417A	GB41291714	March 13, 2010	One year
04	Power sensor	Agilent 8481H	MY41091316	March 26, 2010	One year
05	Signal Generator	HP 8341B	2730A00804	September 13, 2009	One year
06	Amplifier	IXA-020	0401	No Calibration Requested	
07	BTS	E5515C	MY48360988	December 4, 2009	One year
08	E-field Probe	EX3DV4	3661	December 30, 2009	One year
09	DAE	DAE4	871	November 11, 2009	One year
10	Validation Kit 835MHz	D835V2	4d082	July 13, 2009	One year
11	Validation Kit 1900MHz	D1900V2	5d111	July 14, 2009	One year
12	Validation Kit 2450MHz	D2450V2	712	February 19, 2010	One year

\*\*\*\*\*END OF REPORT BODY\*\*\*\*\*

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0908

Page 43 of 185

**ANNEX A: Test Layout**



Picture 1: Specific Absorption Rate Test Layout


**TA Technology (Shanghai) Co., Ltd.  
Test Report**

Report No. RZA2010-0908

Page 44 of 185



Picture 2: Liquid depth in the flat Phantom (835MHz)  
(15.4cm depth)

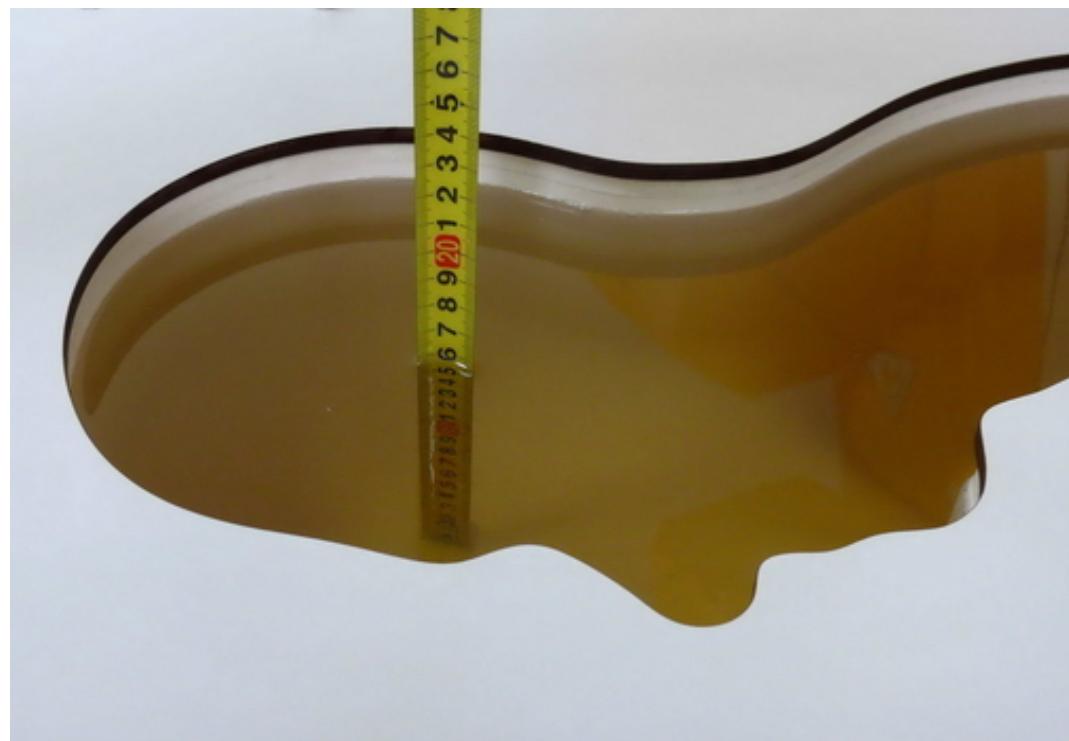


Picture 3: Liquid depth in the head Phantom (835MHz)  
(15.4cm depth)

**TA Technology (Shanghai) Co., Ltd.  
Test Report**

Report No. RZA2010-0908

Page 45 of 185

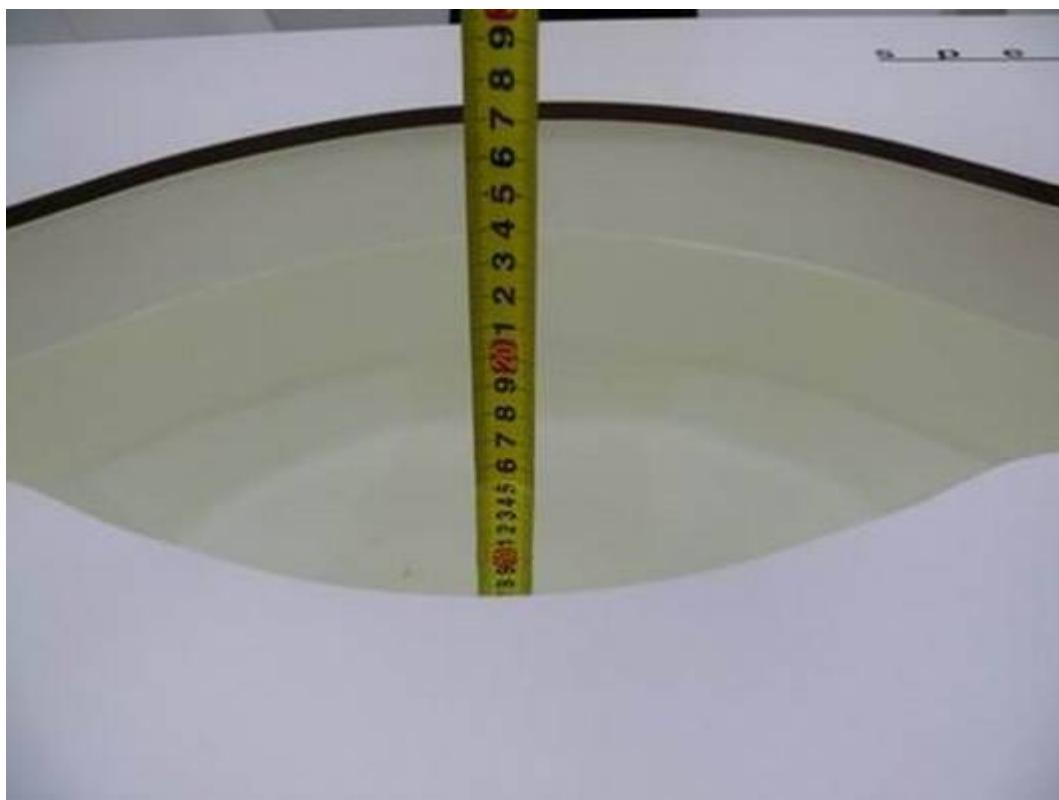

Picture 4: Liquid depth in the flat Phantom (1900 MHz)  
(15.4cm depth)



Picture 5: liquid depth in the head Phantom (1900 MHz)  
(15.2cm depth)


**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0908

Page 46 of 185



Picture 6: Liquid depth in the head Phantom (2450 MHz)  
(15.4cm depth)

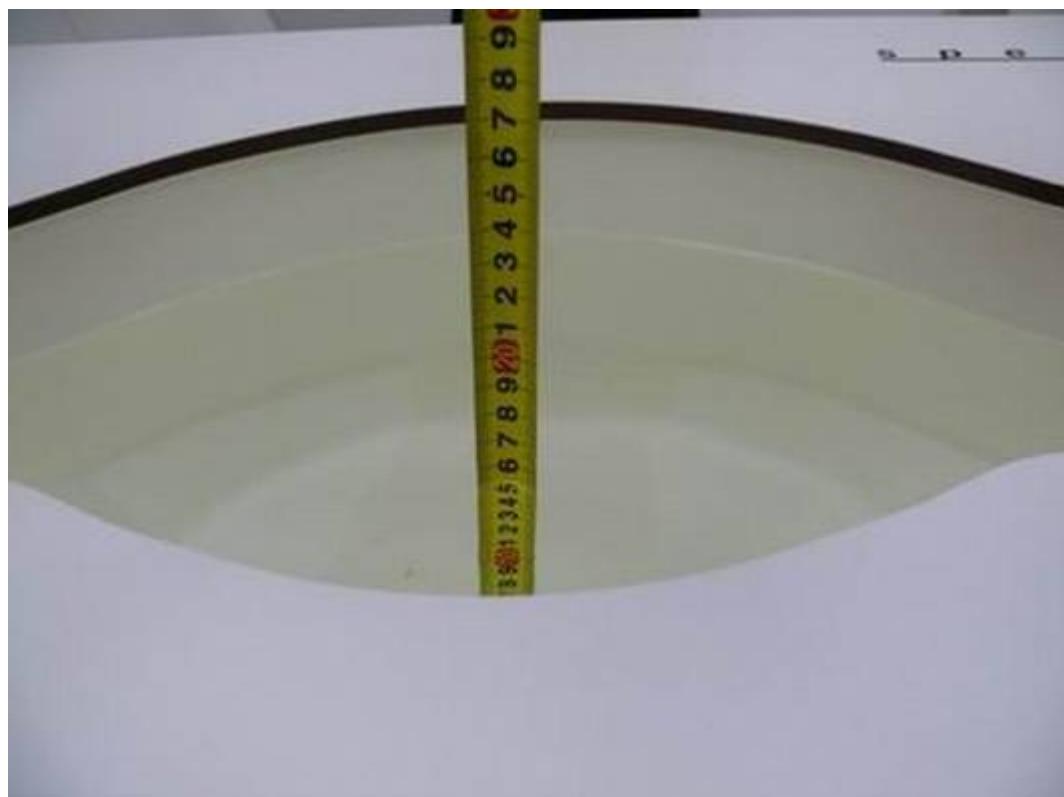

Picture 7: Liquid depth in the flat Phantom (2450 MHz)  
(15.4cm depth)

## ANNEX B: System Check Results

### System Performance Check at 835 MHz Head TSL

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d082**

Date/Time: 6/24/2010 7:16:02 PM

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.93$  mho/m;  $\epsilon_r = 42.06$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(9.34, 9.34, 9.34); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**d=15mm, Pin=250mW/Area Scan (41x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.71 mW/g

**d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.5 V/m; Power Drift = -0.092 dB

Peak SAR (extrapolated) = 3.75 W/kg

**SAR(1 g) = 2.48 mW/g; SAR(10 g) = 1.62 mW/g**

Maximum value of SAR (measured) = 2.67 mW/g

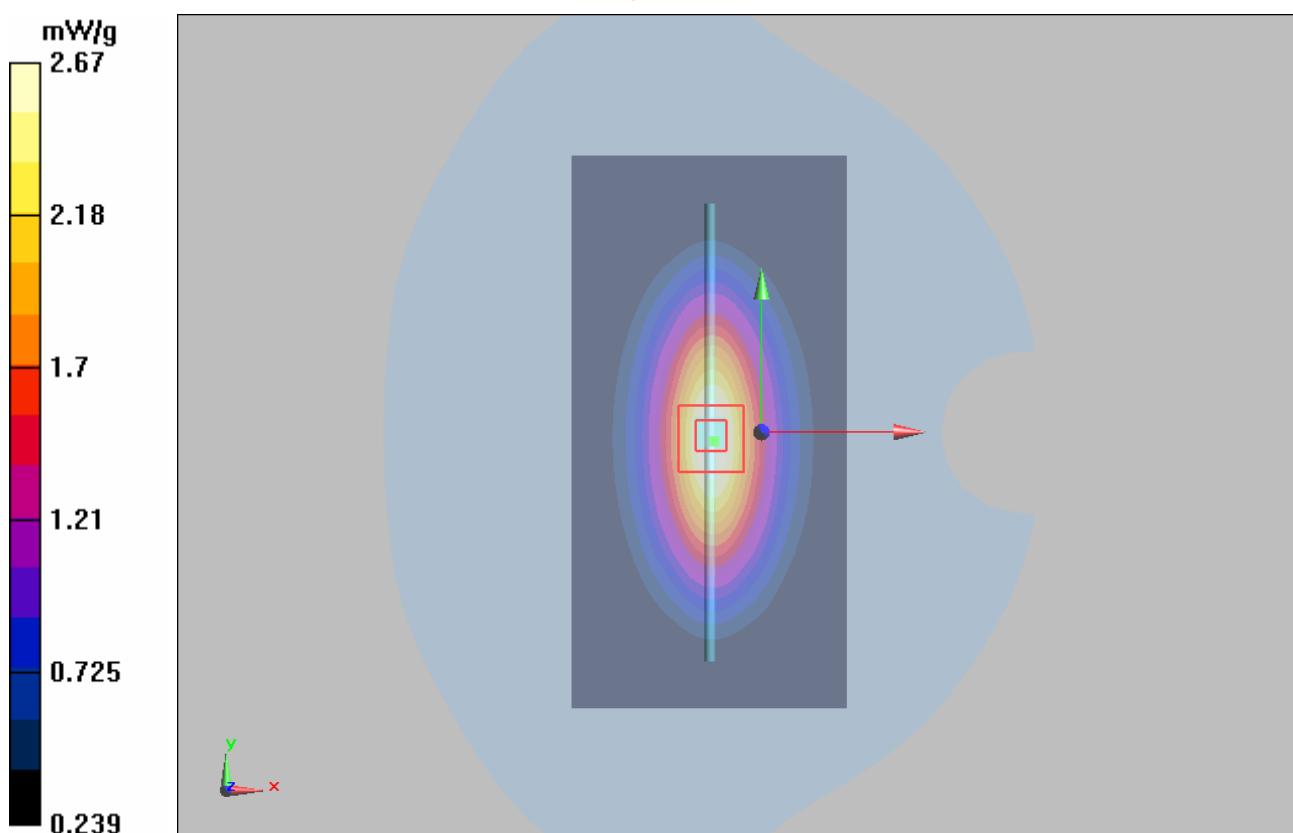


Figure 7 System Performance Check 835MHz 250mW

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 48 of 185

## System Performance Check at 835 MHz Body TSL

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d082

Date/Time: 6/25/2010 7:42:20 PM

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 1.00$  mho/m;  $\epsilon_r = 54.67$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5°C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(9.24, 9.24, 9.24); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**d=15mm, Pin=250mW/Area Scan (61x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.77 mW/g

**d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.9 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 3.68 W/kg

**SAR(1 g) = 2.56 mW/g; SAR(10 g) = 1.68 mW/g**

Maximum value of SAR (measured) = 2.77 mW/g

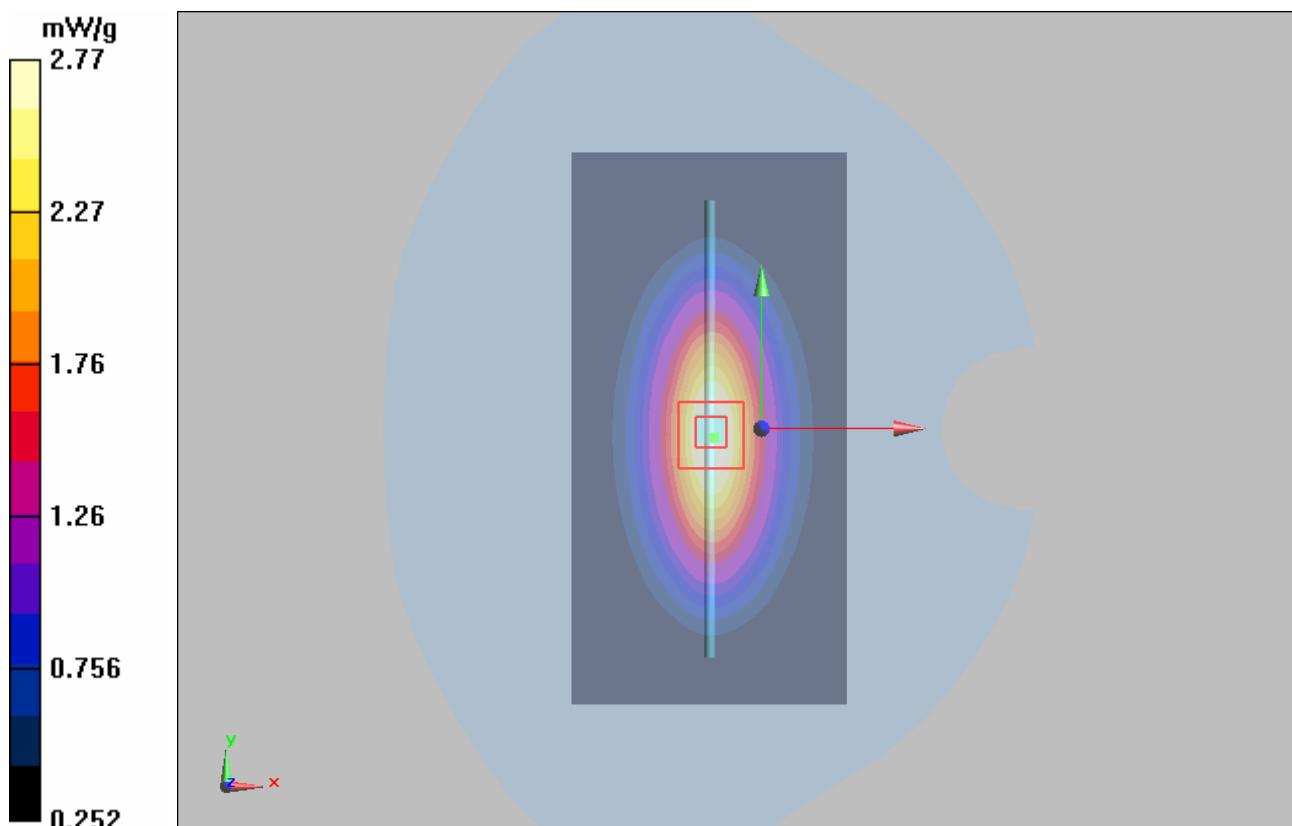


Figure 8 System Performance Check 835MHz 250mW

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 49 of 185

## System Performance Check at 1900 MHz Head TSL

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d111

Date/Time: 6/24/2010 10:03:04 AM

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.42$  mho/m;  $\epsilon_r = 40.19$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.77, 7.77, 7.77); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**d=10mm, Pin=250mW/Area Scan (41x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.9 mW/g

**d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.8 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 20.1 W/kg

**SAR(1 g) = 10.6 mW/g; SAR(10 g) = 5.46 mW/g**

Maximum value of SAR (measured) = 11.9 mW/g

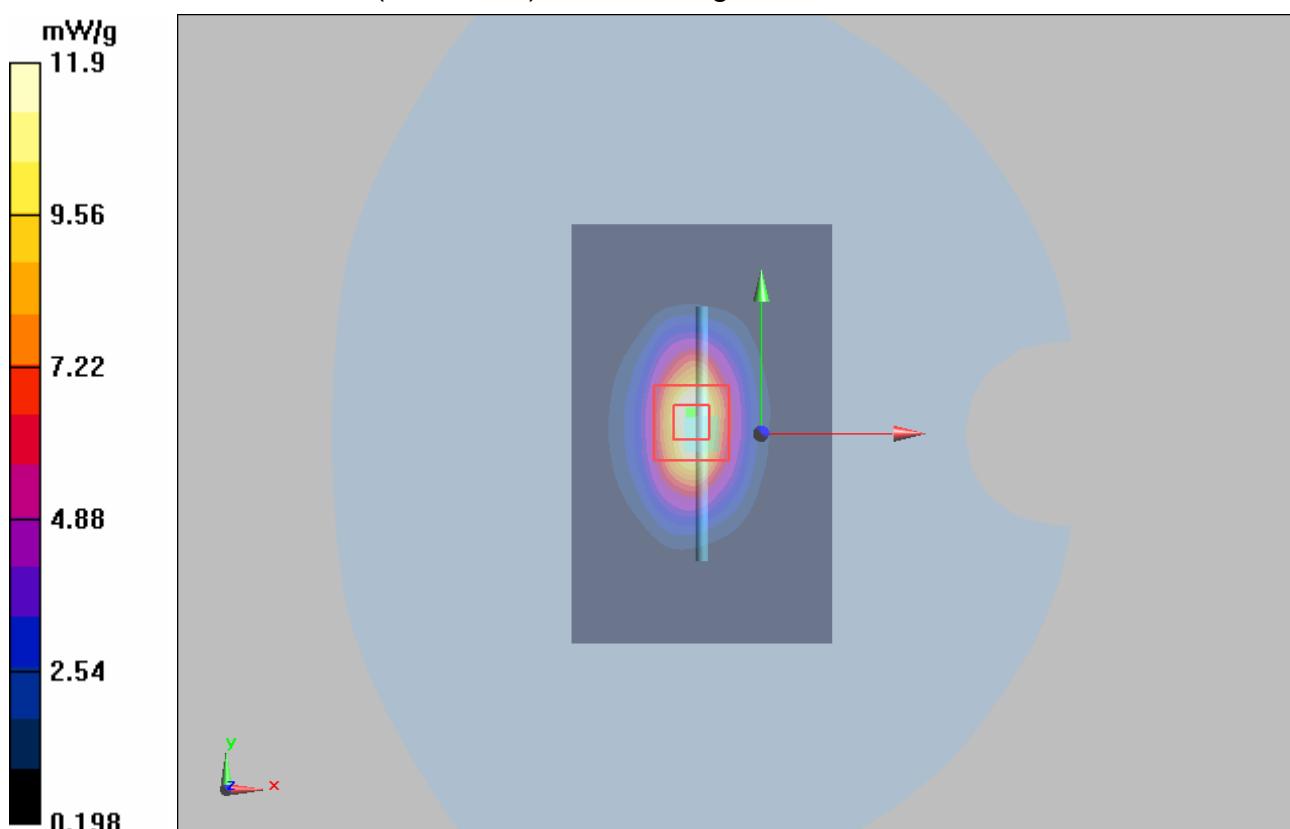


Figure 9 System Performance Check 1900MHz 250mW

## System Performance Check at 1900 MHz Body TSL

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d111

Date/Time: 6/25/2010 7:51:19 AM

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.56$  mho/m;  $\epsilon_r = 53.01$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.6, 7.6, 7.6); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**d=10mm, Pin=250mW/Area Scan (41x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.5 mW/g

**d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 75.9 V/m; Power Drift = 0.051 dB

Peak SAR (extrapolated) = 16.8 W/kg

**SAR(1 g) = 9.73 mW/g; SAR(10 g) = 5.17 mW/g**

Maximum value of SAR (measured) = 11 mW/g

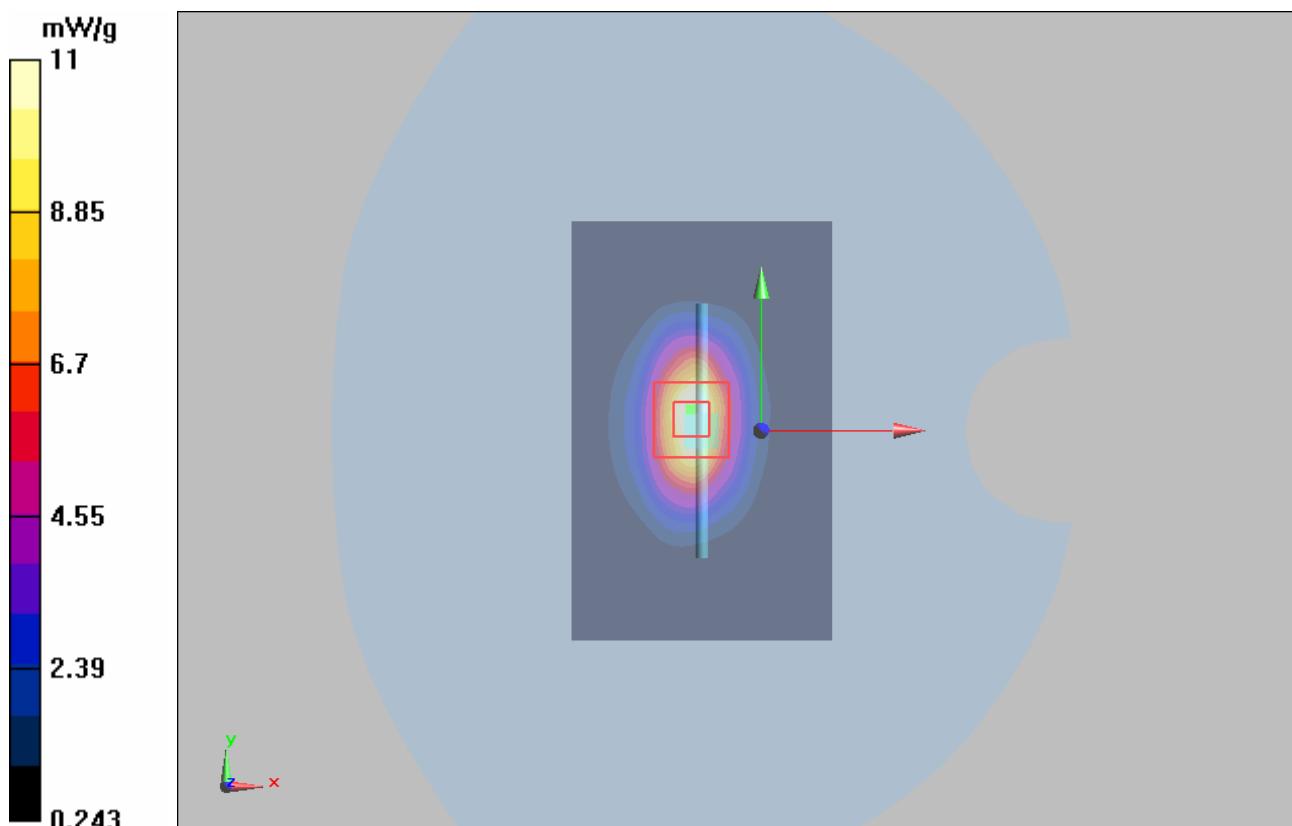


Figure 10 System Performance Check 1900MHz 250Mw

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 51 of 185

## System Performance Check at 2450 MHz

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:712

Date/Time: 6/29/2010 11:04:36 PM

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.79$  mho/m;  $\epsilon_r = 38.81$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.22, 7.22, 7.22); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**d=10mm, Pin=250mW/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 21.4 mW/g

**d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 67.0 V/m; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 28.0 W/kg

**SAR(1 g) = 14.05 mW/g; SAR(10 g) = 6.5 mW/g**

Maximum value of SAR (measured) = 15.7 mW/g

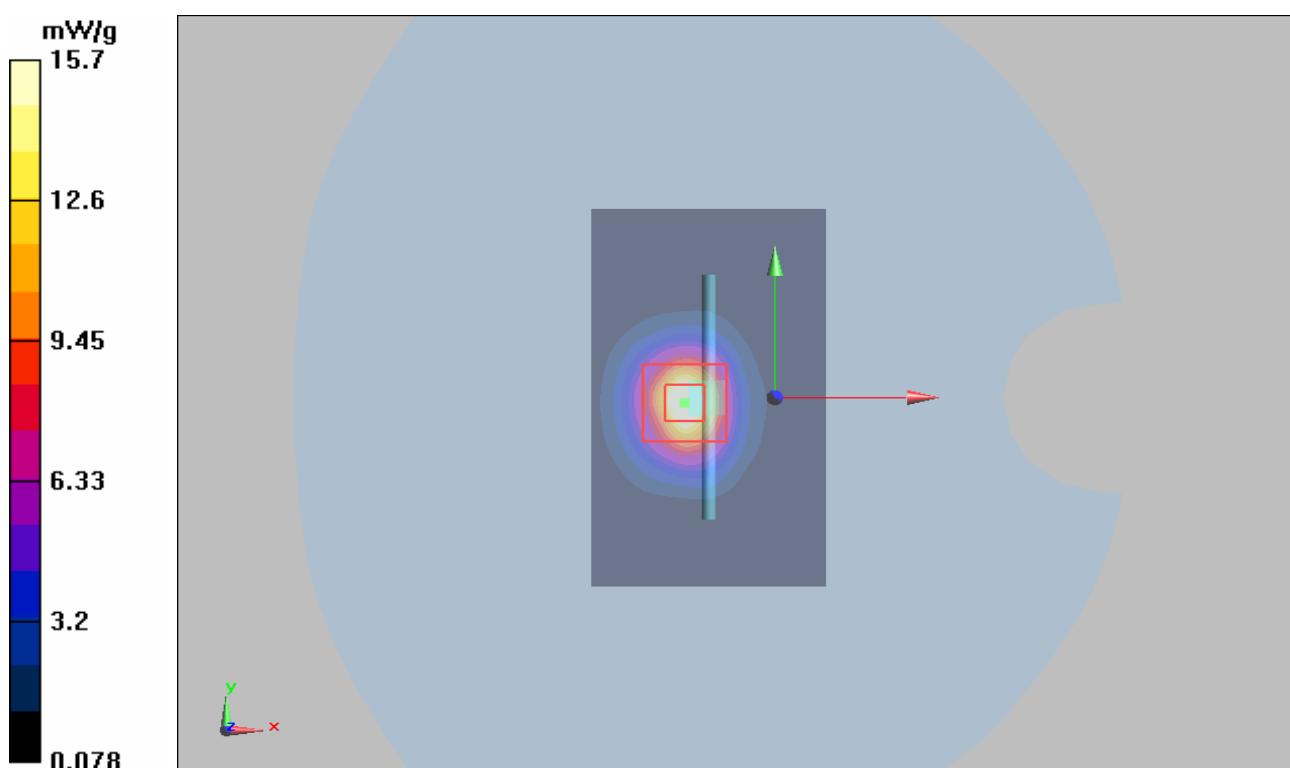


Figure 11 System Performance Check 2450MHz 250mW

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 52 of 185

## System Performance Check at 2450 MHz Body TSL

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:712

Date/Time: 6/29/2010 9:47:36 PM

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.92$  mho/m;  $\epsilon_r = 51.83$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.34, 7.34, 7.34); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**d=10mm, Pin=250mW/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 21.5 mW/g

**d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 71.0 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 28.2 W/kg

**SAR(1 g) = 14.0 mW/g; SAR(10 g) = 6.46 mW/g**

Maximum value of SAR (measured) = 19.8 mW/g

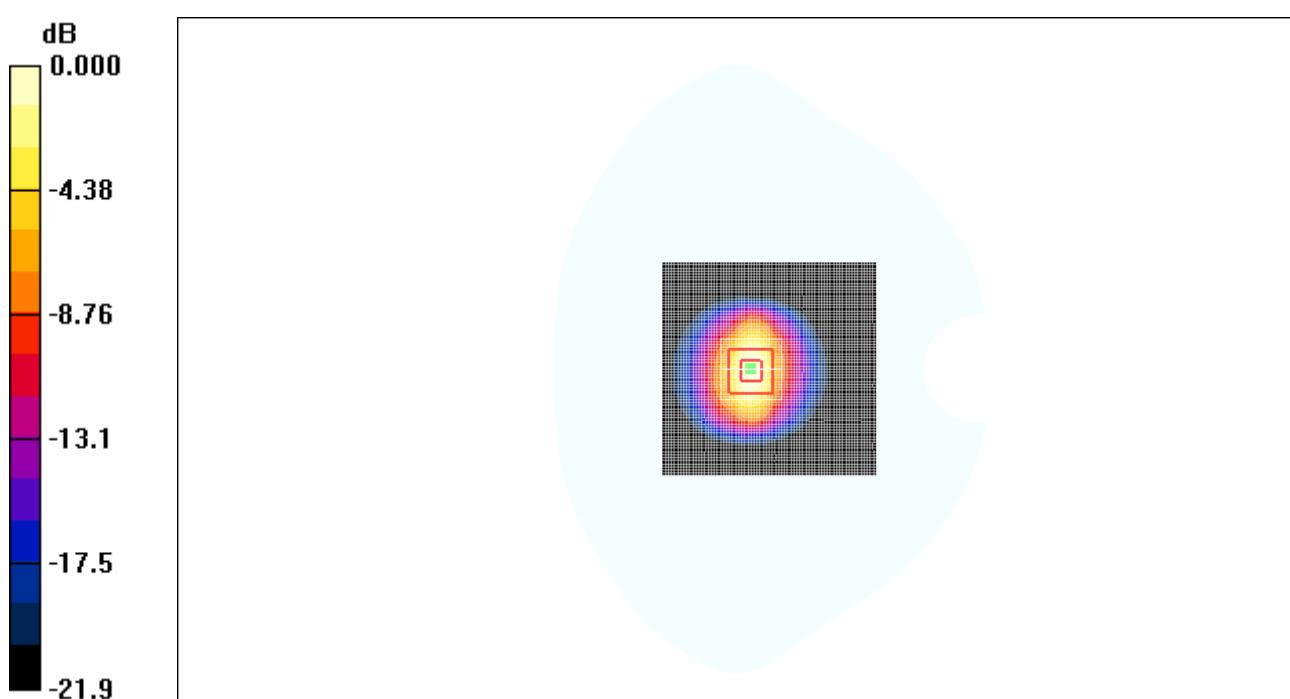


Figure 12 System Performance Check 2450MHz 250mW

## ANNEX C: Graph Results

### GSM 850 Left Cheek High

Date/Time: 6/25/2010 4:21:09 AM

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.944$  mho/m;  $\epsilon_r = 41.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5°C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(9.34, 9.34, 9.34); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Cheek High/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.743 mW/g


**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.6 V/m; Power Drift = 0.084 dB

Peak SAR (extrapolated) = 0.893 W/kg

**SAR(1 g) = 0.680 mW/g; SAR(10 g) = 0.488 mW/g**

Maximum value of SAR (measured) = 0.719 mW/g

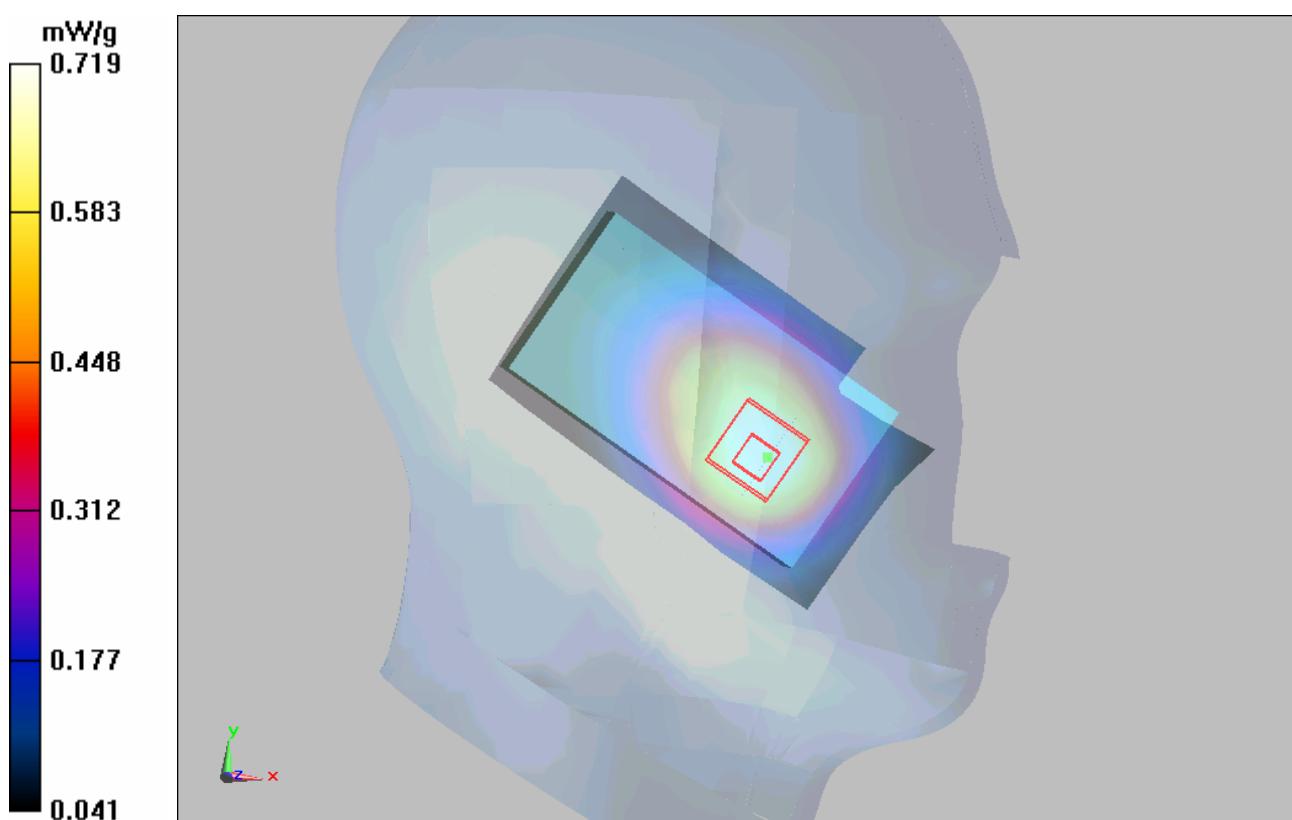

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0908

Page 54 of 185

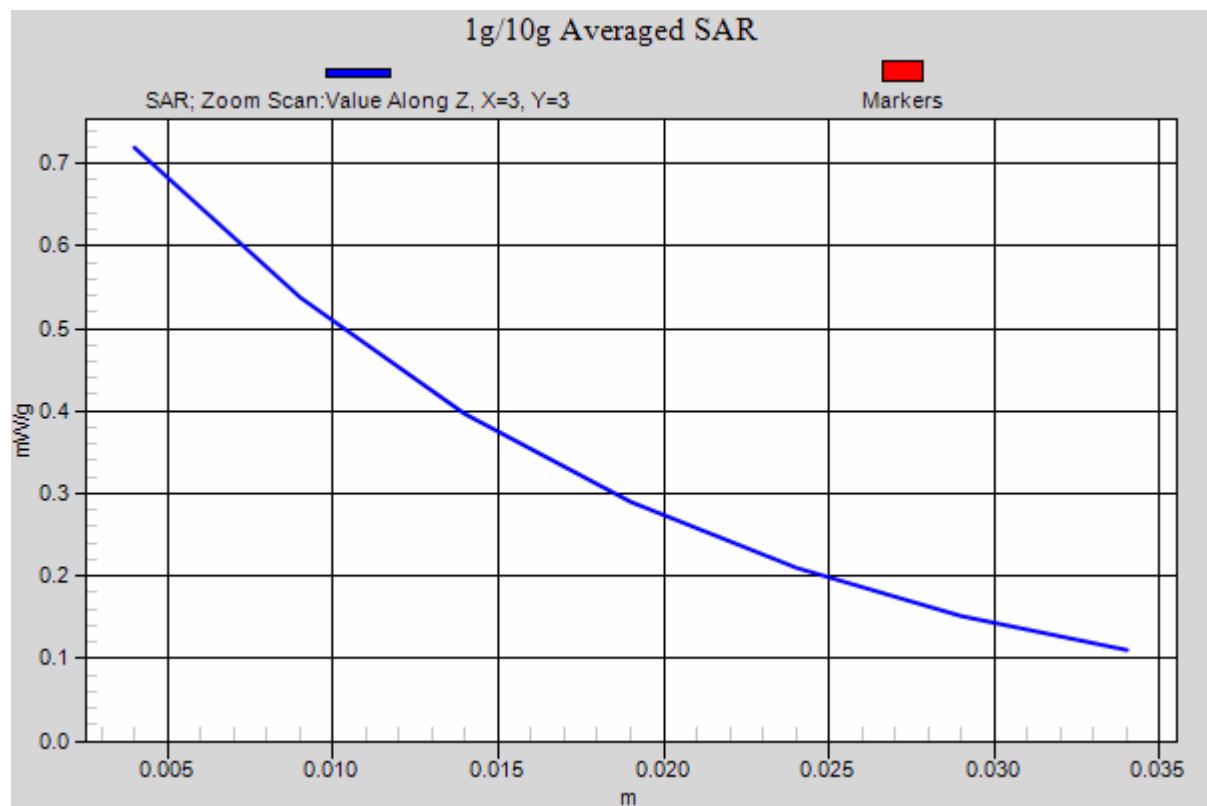


Figure 13 Left Hand Touch Cheek GSM 850 Channel 251

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0908

Page 55 of 185

### GSM 850 Left Cheek Middle

Date/Time: 6/25/2010 4:00:31 AM

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.933$  mho/m;  $\epsilon_r = 42$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(9.34, 9.34, 9.34); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Cheek Middle/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.641 mW/g

**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.2 V/m; Power Drift = -0.077 dB

Peak SAR (extrapolated) = 0.772 W/kg

**SAR(1 g) = 0.587 mW/g; SAR(10 g) = 0.423 mW/g**

Maximum value of SAR (measured) = 0.621 mW/g

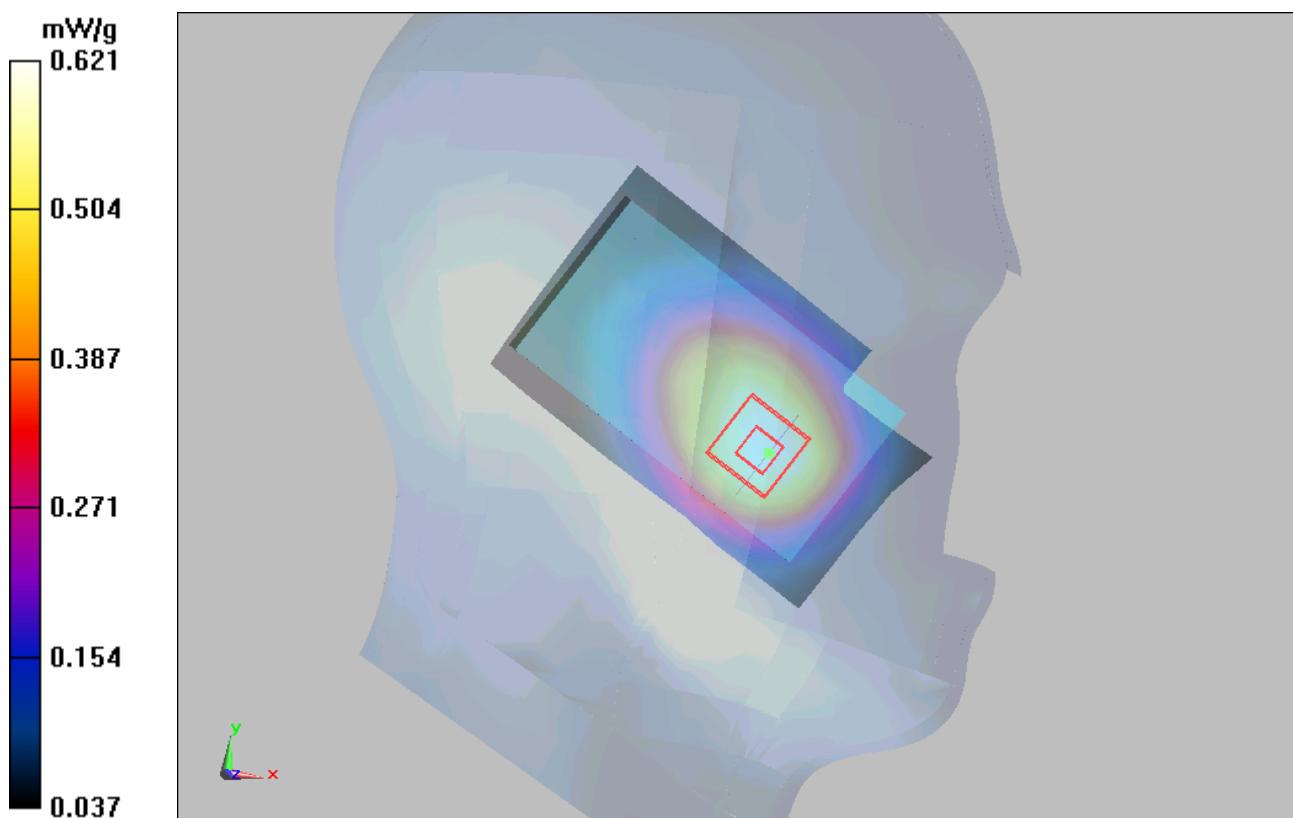


Figure 14 Left Hand Touch Cheek GSM 850 Channel 190

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0908

Page 56 of 185

### **GSM 850 Left Cheek Low**

Date/Time: 6/25/2010 4:41:30 AM

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.925$  mho/m;  $\epsilon_r = 42.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(9.34, 9.34, 9.34); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Cheek Low/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.632 mW/g

**Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8 V/m; Power Drift = 0.120 dB

Peak SAR (extrapolated) = 0.756 W/kg

**SAR(1 g) = 0.581 mW/g; SAR(10 g) = 0.418 mW/g**

Maximum value of SAR (measured) = 0.614 mW/g

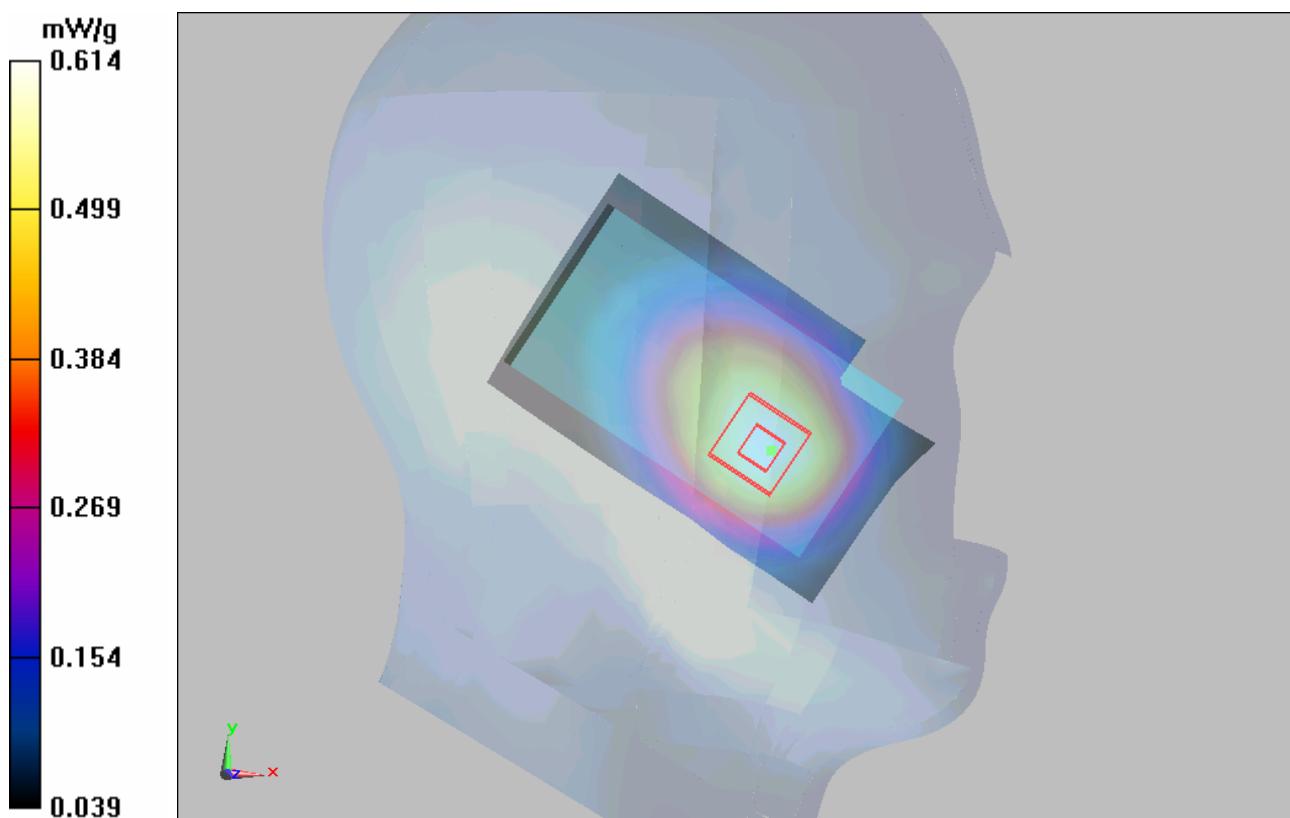


Figure 15 Left Hand Touch Cheek GSM 850 Channel 128

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 57 of 185

## GSM 850 Left Tilt Middle

Date/Time: 6/25/2010 5:02:08 AM

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.933$  mho/m;  $\epsilon_r = 42$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(9.34, 9.34, 9.34); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Tilt Middle/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.314 mW/g

**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.9 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 0.377 W/kg

**SAR(1 g) = 0.299 mW/g; SAR(10 g) = 0.224 mW/g**

Maximum value of SAR (measured) = 0.315 mW/g

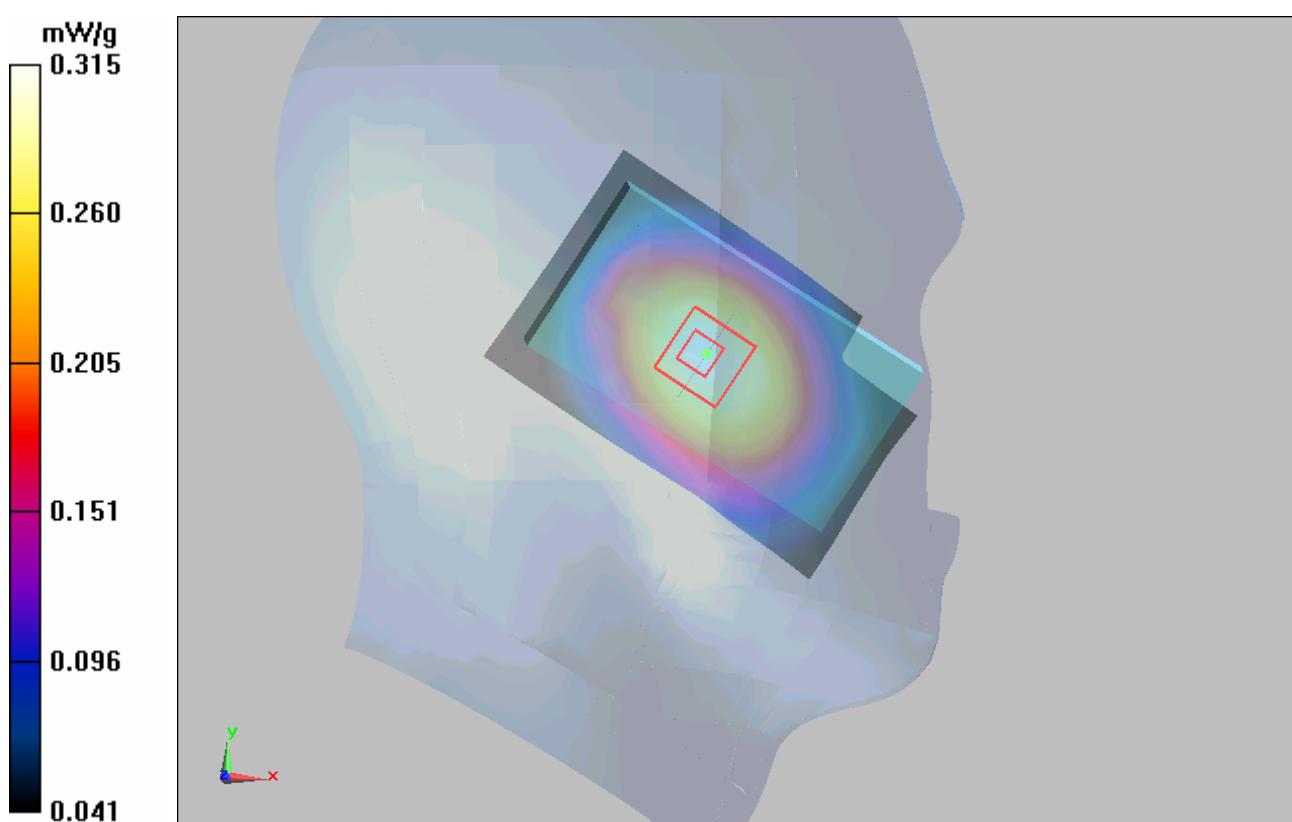


Figure 16 Left Hand Tilt 15° GSM 850 Channel 190

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 58 of 185

## GSM 850 Right Cheek Middle

Date/Time: 6/25/2010 3:15:54 AM

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.933$  mho/m;  $\epsilon_r = 42$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(9.34, 9.34, 9.34); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Cheek Middle/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.595 mW/g

**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.43 V/m; Power Drift = 0.047 dB

Peak SAR (extrapolated) = 0.762 W/kg

**SAR(1 g) = 0.556 mW/g; SAR(10 g) = 0.404 mW/g**

Maximum value of SAR (measured) = 0.587 mW/g

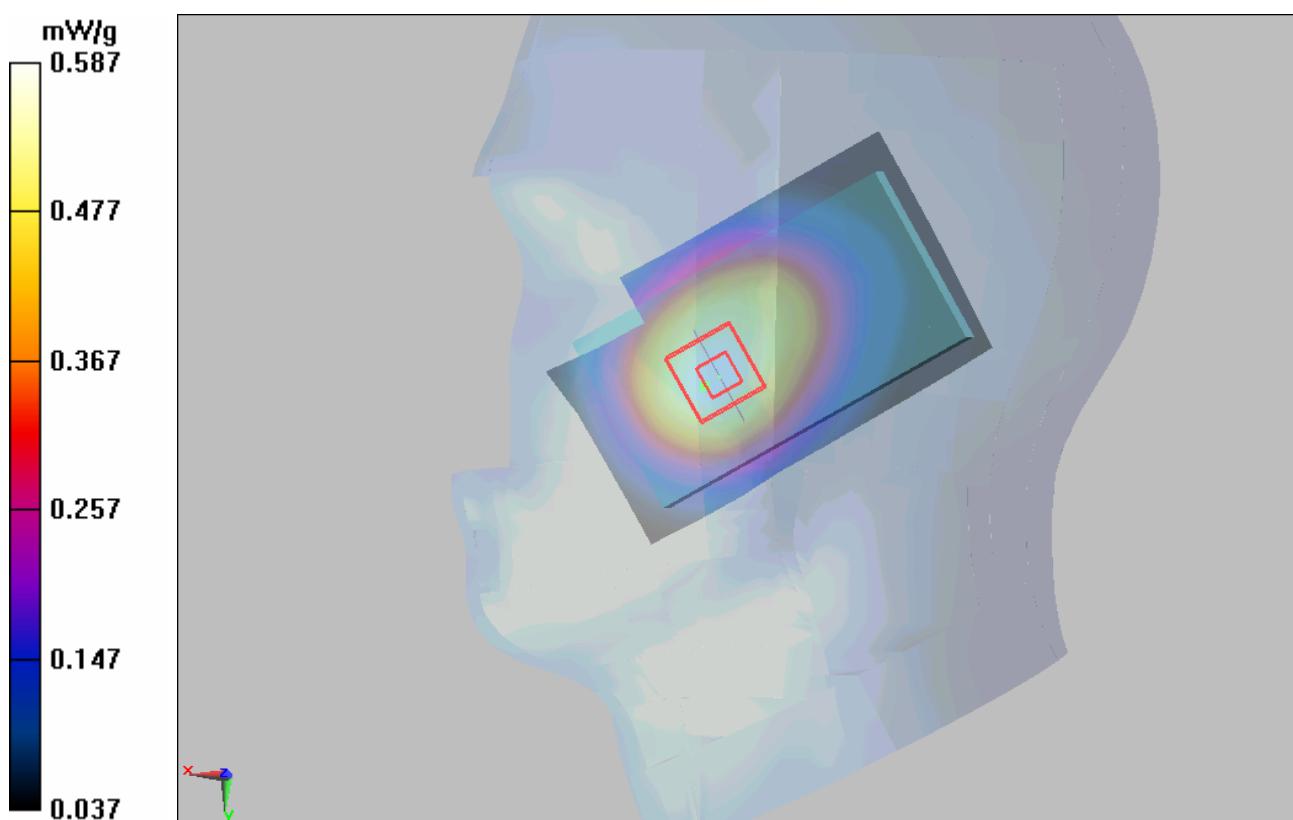


Figure 17 Right Hand Touch Cheek GSM 850 Channel 190

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 59 of 185

## GSM 850 Right Tilt Middle

Date/Time: 6/25/2010 3:36:16 AM

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.933$  mho/m;  $\epsilon_r = 42$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(9.34, 9.34, 9.34); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Tilt Middle/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.342 mW/g

**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.4 V/m; Power Drift = 0.021 dB

Peak SAR (extrapolated) = 0.418 W/kg

**SAR(1 g) = 0.327 mW/g; SAR(10 g) = 0.243 mW/g**

Maximum value of SAR (measured) = 0.346 mW/g

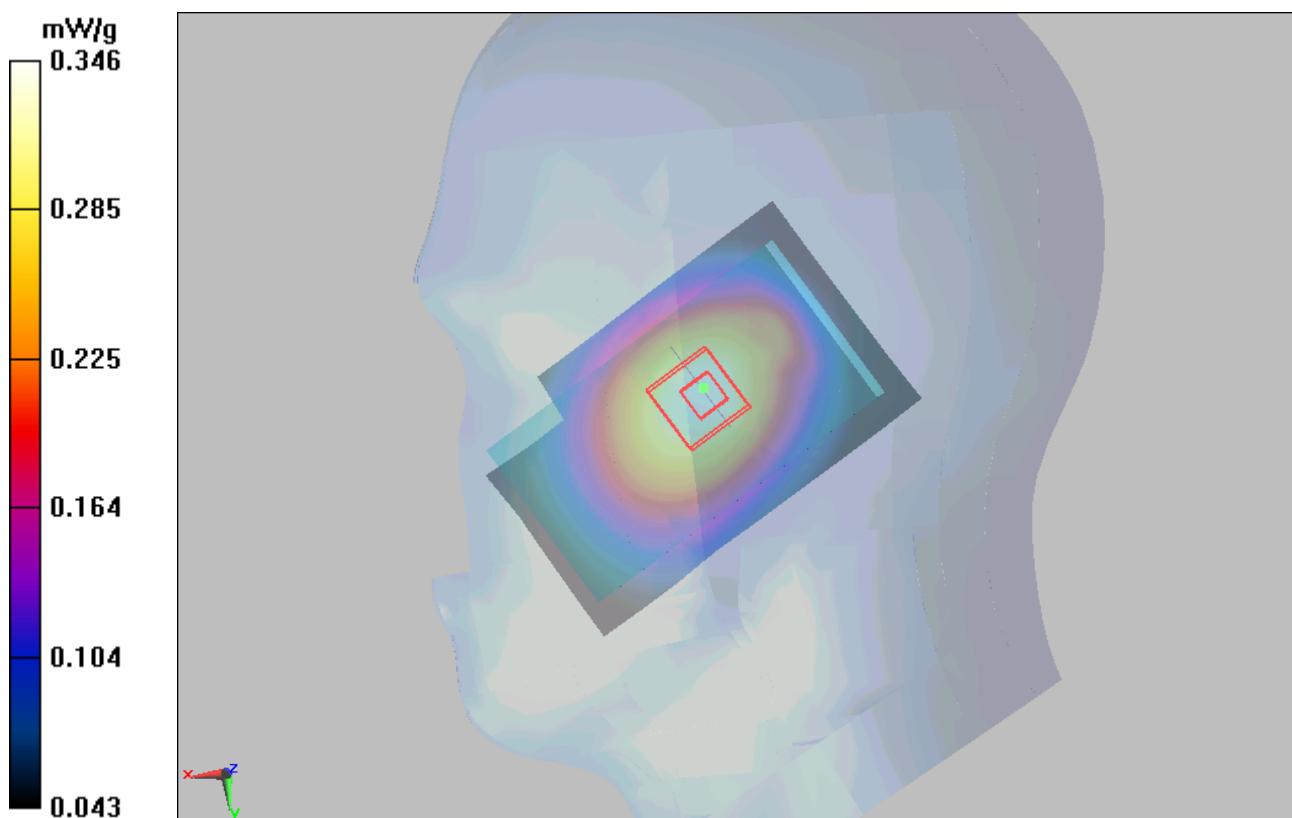


Figure 18 Right Hand Tilt 15° GSM 850 Channel 190

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 60 of 185

## GSM 850 Towards Ground High

Date/Time: 6/26/2010 3:21:44 AM

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 849$  MHz;  $\sigma = 1.02$  mho/m;  $\epsilon_r = 54.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(9.24, 9.24, 9.24); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Ground High/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.550 mW/g

**Towards Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.28 V/m; Power Drift = -0.064 dB

Peak SAR (extrapolated) = 0.698 W/kg

**SAR(1 g) = 0.520 mW/g; SAR(10 g) = 0.371 mW/g**

Maximum value of SAR (measured) = 0.549 mW/g

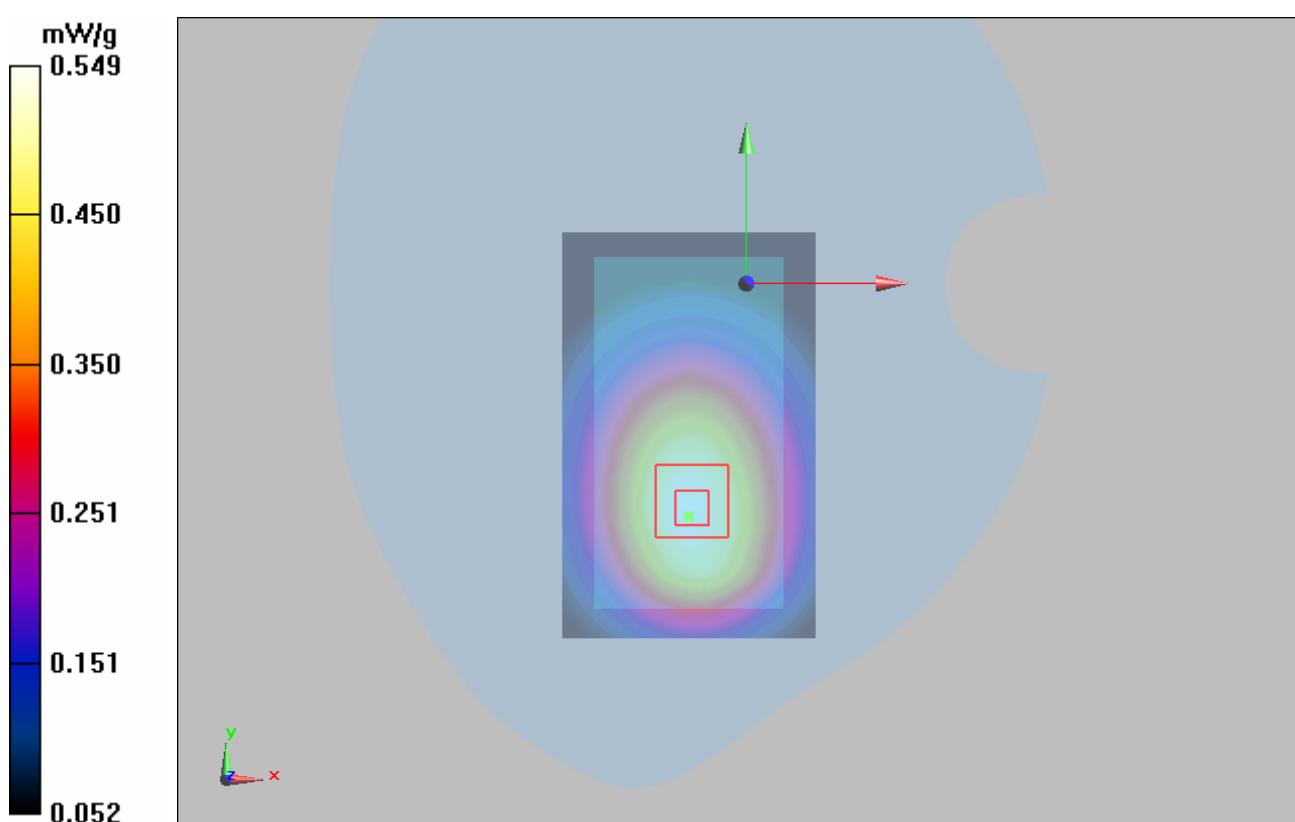


Figure 19 Body, Towards Ground, GSM 850 Channel 251

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 61 of 185

## GSM 850 Towards Ground Middle

Date/Time: 6/26/2010 2:28:42 AM

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1.01$  mho/m;  $\epsilon_r = 54.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(9.24, 9.24, 9.24); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Ground Middle/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.457 mW/g

**Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.17 V/m; Power Drift = 0.036 dB

Peak SAR (extrapolated) = 0.586 W/kg

**SAR(1 g) = 0.432 mW/g; SAR(10 g) = 0.308 mW/g**

Maximum value of SAR (measured) = 0.458 mW/g

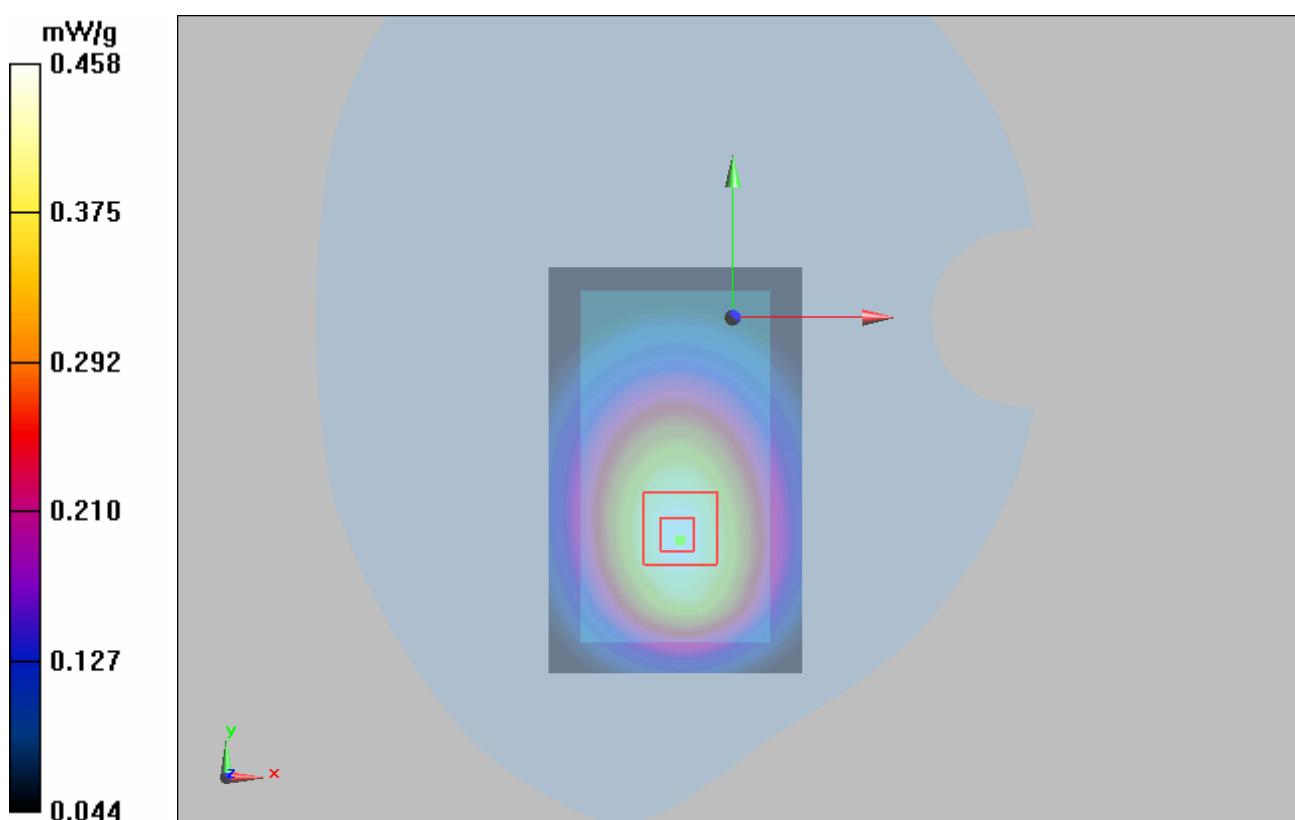


Figure 20 Body, Towards Ground, GSM 850 Channel 190

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 62 of 185

## GSM 850 Towards Ground Low

Date/Time: 6/26/2010 2:49:12 AM

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.994$  mho/m;  $\epsilon_r = 54.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(9.24, 9.24, 9.24); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Ground Low/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.424 mW/g

**Towards Ground Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.69 V/m; Power Drift = 0.106 dB

Peak SAR (extrapolated) = 0.545 W/kg

**SAR(1 g) = 0.400 mW/g; SAR(10 g) = 0.285 mW/g**

Maximum value of SAR (measured) = 0.424 mW/g

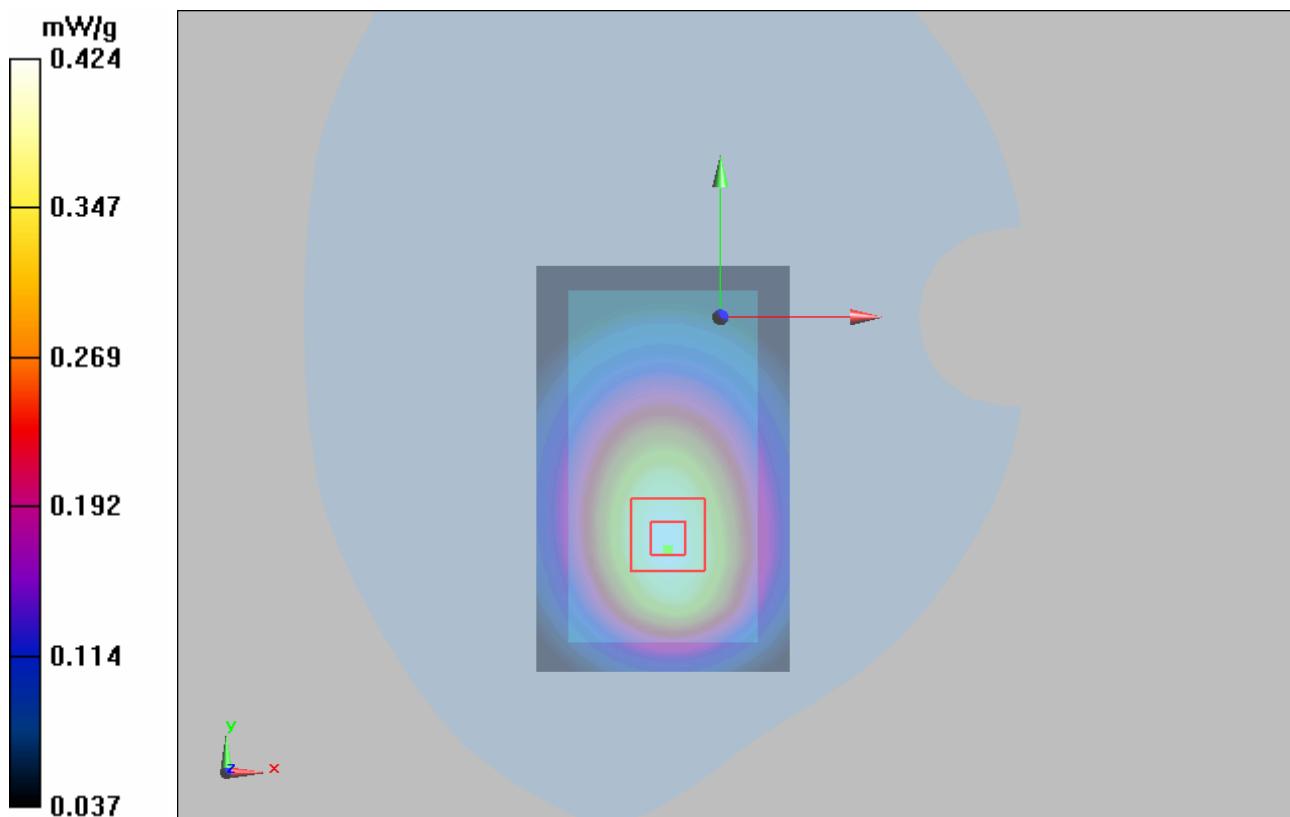


Figure 21 Body, Towards Ground, GSM 850 Channel 128

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 63 of 185

## GSM 850 Towards Phantom Middle

Date/Time: 6/26/2010 2:07:13 AM

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1.01$  mho/m;  $\epsilon_r = 54.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(9.24, 9.24, 9.24); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Phantom Middle/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.352 mW/g

**Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.49 V/m; Power Drift = 0.142 dB

Peak SAR (extrapolated) = 0.439 W/kg

**SAR(1 g) = 0.331 mW/g; SAR(10 g) = 0.241 mW/g**

Maximum value of SAR (measured) = 0.350 mW/g

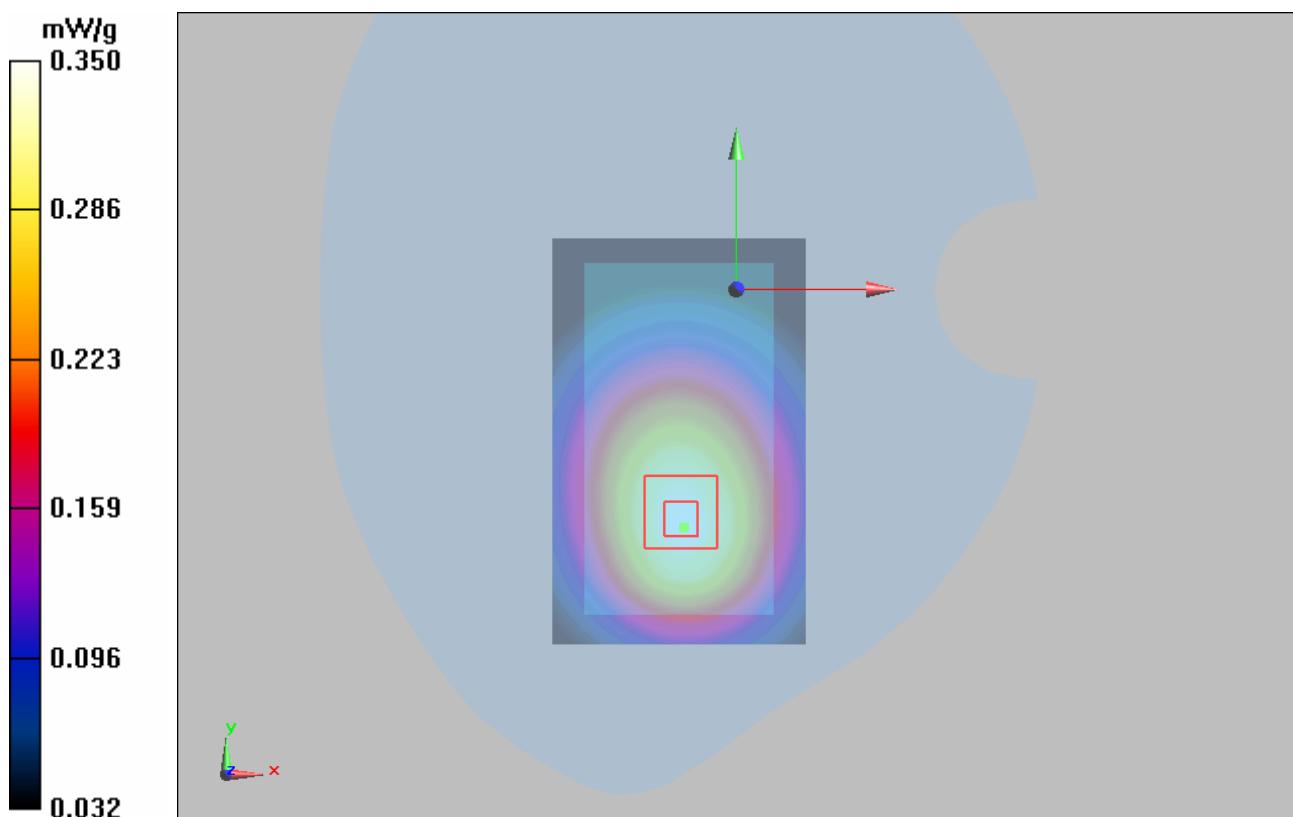


Figure 22 Body, Towards Phantom, GSM 850 Channel 190

### GSM 850 with Earphone Towards Ground High

Date/Time: 6/26/2010 3:42:25 AM

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 849$  MHz;  $\sigma = 1.02$  mho/m;  $\epsilon_r = 54.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(9.24, 9.24, 9.24); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Ground High/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.459 mW/g

**Towards Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.14 V/m; Power Drift = 0.193 dB

Peak SAR (extrapolated) = 0.593 W/kg

**SAR(1 g) = 0.440 mW/g; SAR(10 g) = 0.315 mW/g**

Maximum value of SAR (measured) = 0.467 mW/g

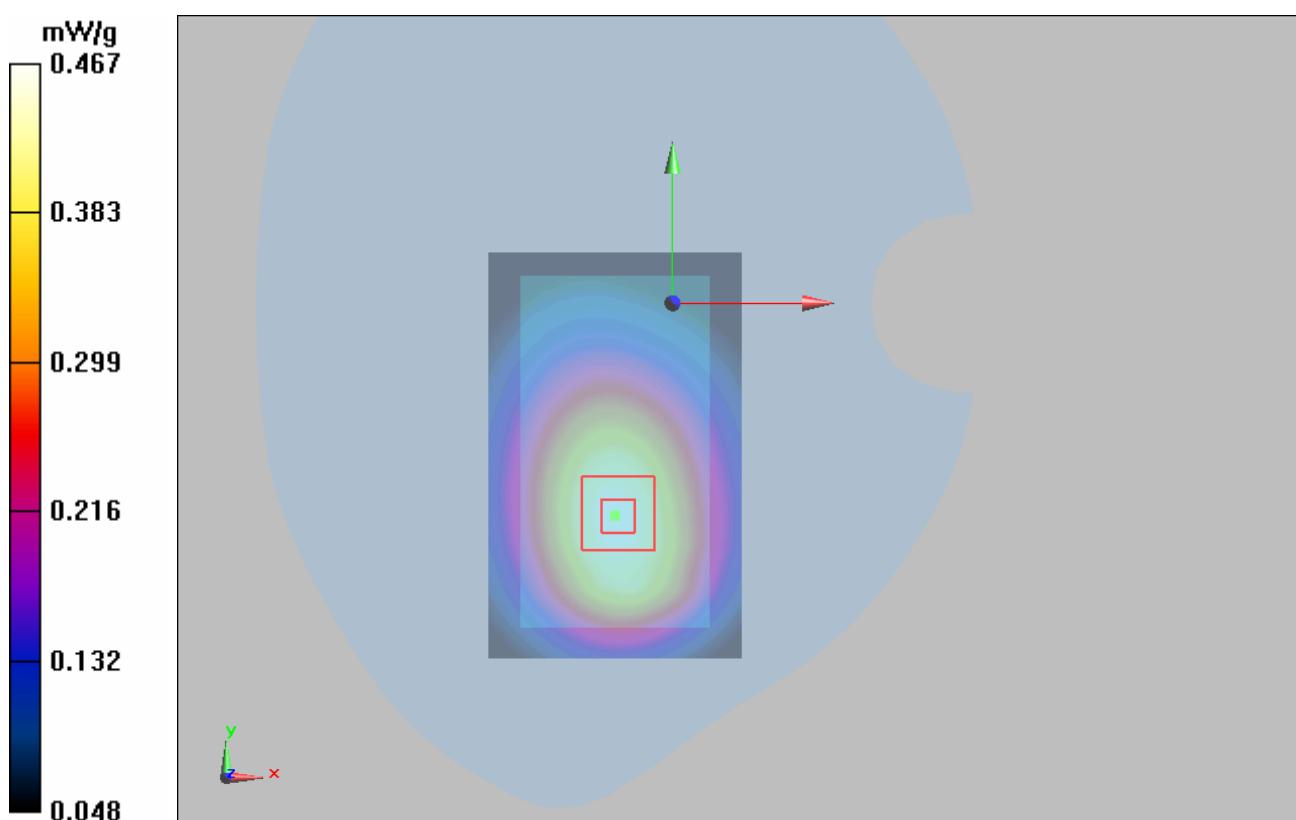


Figure 23 Body with Earphone, Towards Ground, GSM 850 Channel 251

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0908

Page 65 of 185

**GSM 850 GPRS (2Up) Towards Ground High**

Date/Time: 6/26/2010 4:03:26 AM

Communication System: GSM850 + GPRS(2Up); Frequency: 848.8 MHz; Duty Cycle: 1:4.15

Medium parameters used:  $f = 849$  MHz;  $\sigma = 1.02$  mho/m;  $\epsilon_r = 54.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(9.24, 9.24, 9.24); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Ground High/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.661 mW/g


**Towards Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.03 V/m; Power Drift = 0.037 dB

Peak SAR (extrapolated) = 0.859 W/kg

**SAR(1 g) = 0.626 mW/g; SAR(10 g) = 0.444 mW/g**

Maximum value of SAR (measured) = 0.664 mW/g

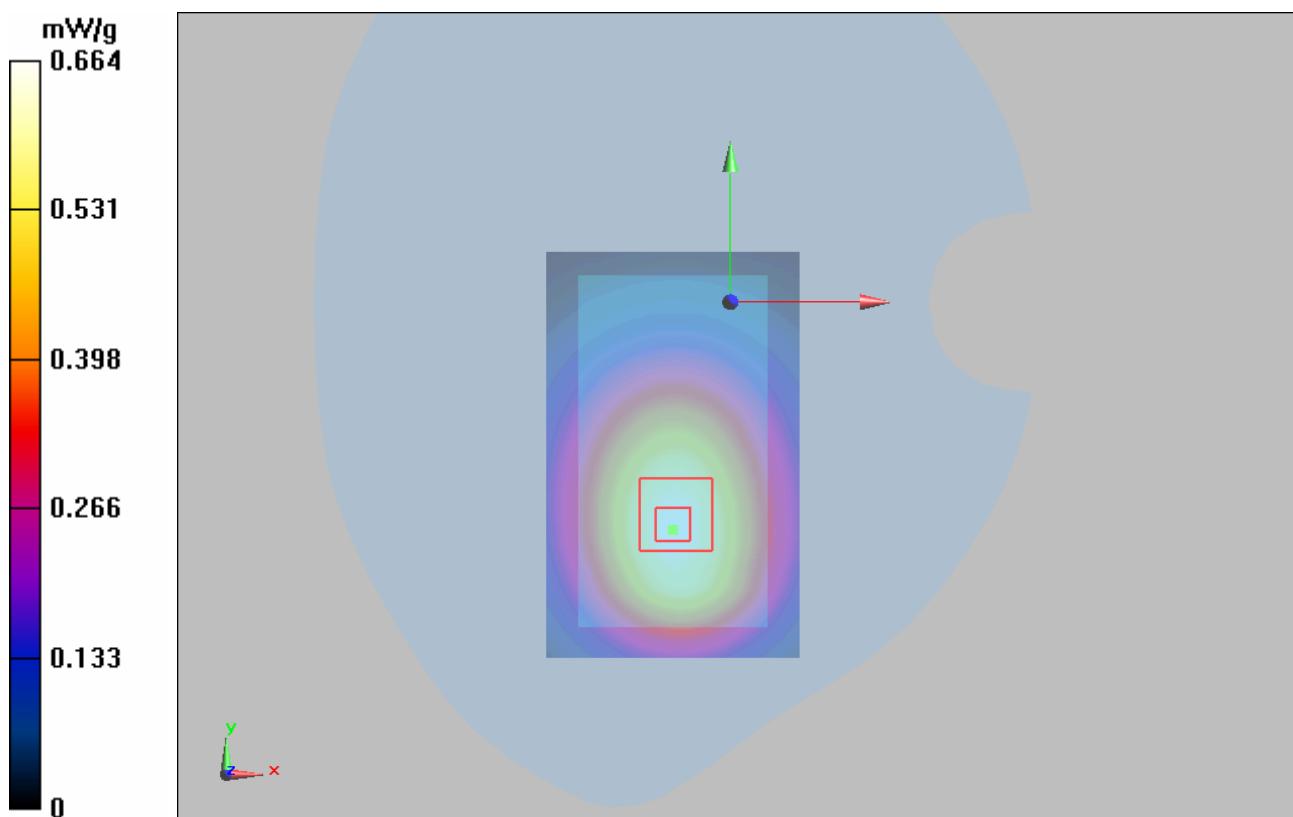

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0908

Page 66 of 185

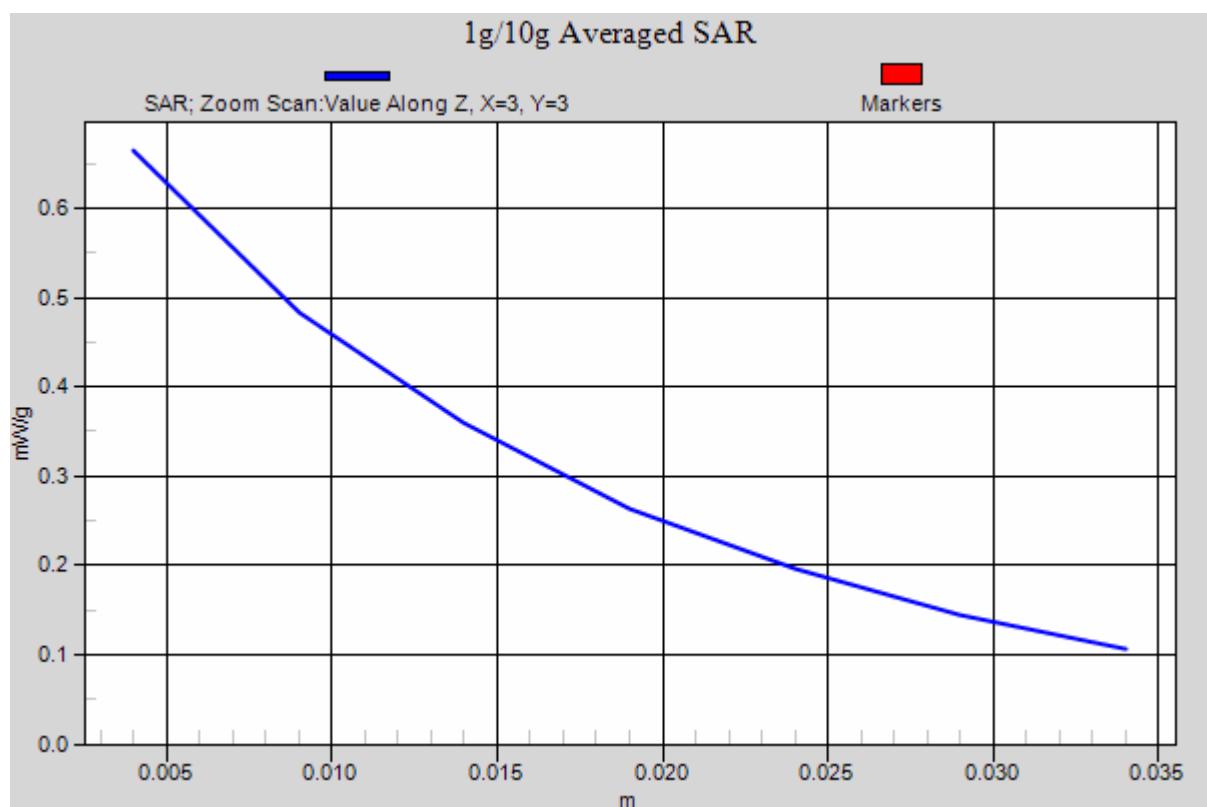


Figure 24 Body, Towards Ground, GSM 850 GPRS (2Up) Channel 251

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0908

Page 67 of 185

### **GSM 850 EGPRS (2Up) Towards Ground High**

Date/Time: 6/26/2010 4:25:02 AM

Communication System: GSM850 + EGPRS(2Up); Frequency: 848.8 MHz; Duty Cycle: 1:4.15

Medium parameters used:  $f = 849$  MHz;  $\sigma = 1.02$  mho/m;  $\epsilon_r = 54.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(9.24, 9.24, 9.24); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Ground High/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.660 mW/g

**Towards Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.01 V/m; Power Drift = -0.159 dB

Peak SAR (extrapolated) = 0.818 W/kg

**SAR(1 g) = 0.605 mW/g; SAR(10 g) = 0.426 mW/g**

Maximum value of SAR (measured) = 0.644 mW/g

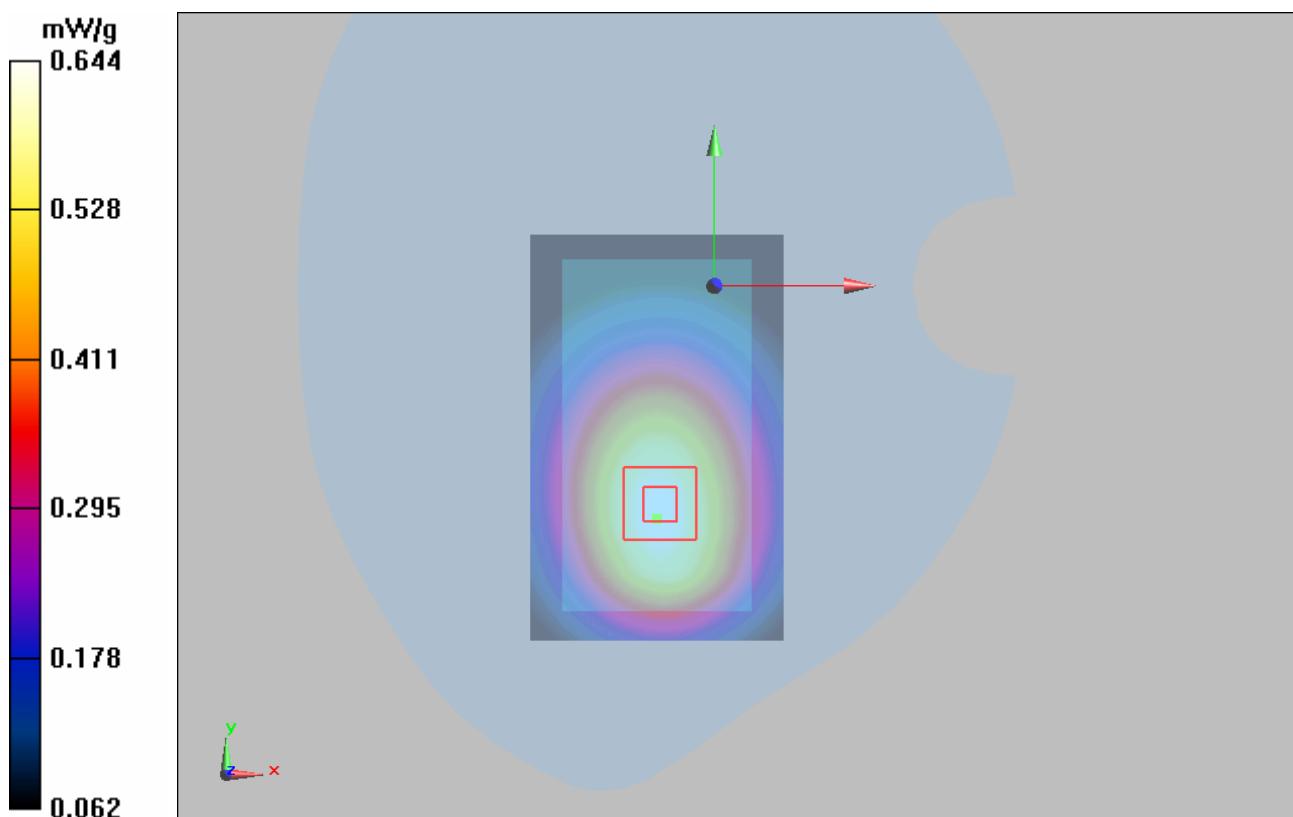


Figure 25 Body, Towards Ground, GSM 850 EGPRS (2Up) Channel 251

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 68 of 185

## GSM 1900 Left Cheek Middle

Date/Time: 6/25/2010 2:15:32 AM

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.4$  mho/m;  $\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.77, 7.77, 7.77); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Cheek Middle/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.780 mW/g

**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.4 V/m; Power Drift = -0.080 dB

Peak SAR (extrapolated) = 1.22 W/kg

**SAR(1 g) = 0.730 mW/g; SAR(10 g) = 0.408 mW/g**

Maximum value of SAR (measured) = 0.800 mW/g

**Cheek Middle/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.4 V/m; Power Drift = -0.080 dB

Peak SAR (extrapolated) = 1.12 W/kg

**SAR(1 g) = 0.605 mW/g; SAR(10 g) = 0.308 mW/g**

Maximum value of SAR (measured) = 0.743 mW/g

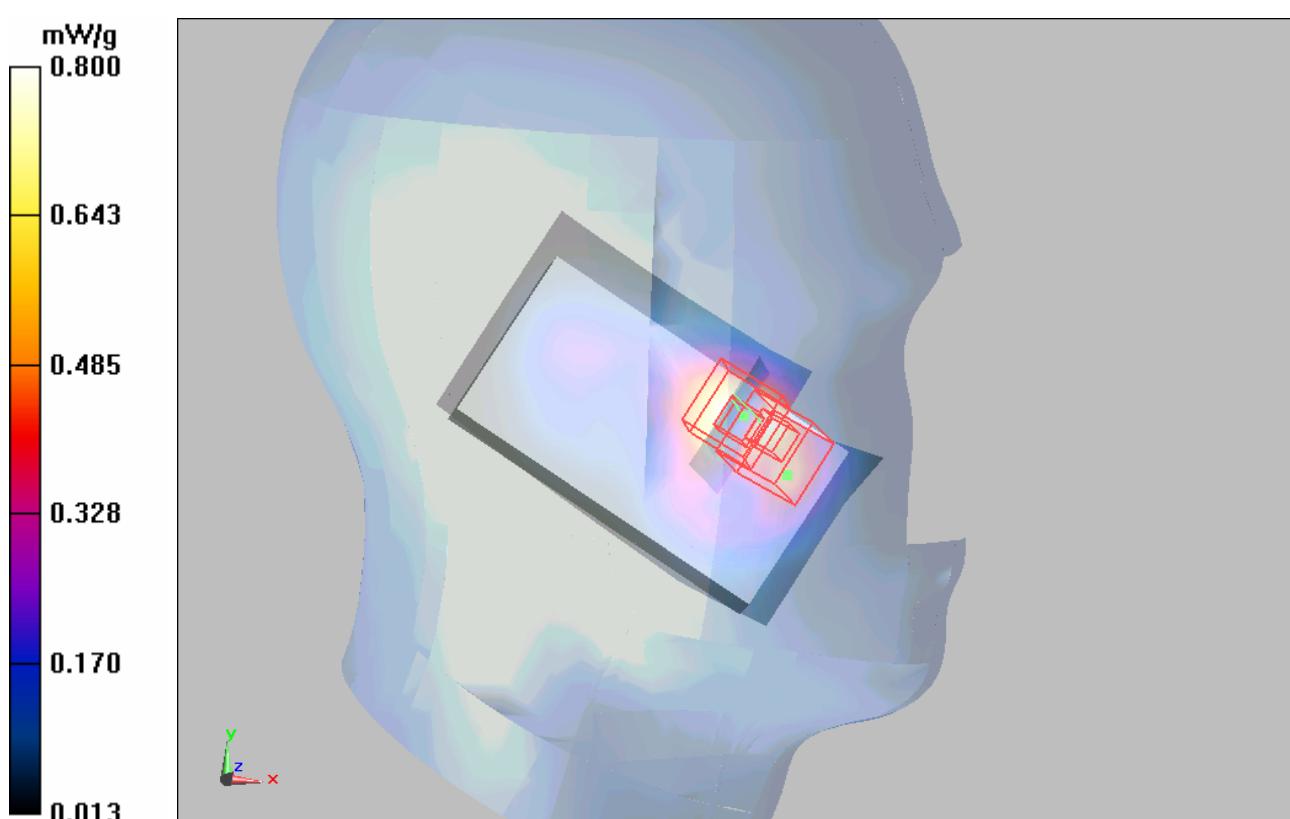


Figure 26 Left Hand Touch Cheek GSM 1900 Channel 661

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 69 of 185

## GSM 1900 Left Tilt Middle

Date/Time: 6/25/2010 2:52:58 AM

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.4$  mho/m;  $\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.77, 7.77, 7.77); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Tilt Middle/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.283 mW/g

**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.1 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 0.380 W/kg

**SAR(1 g) = 0.240 mW/g; SAR(10 g) = 0.144 mW/g**

Maximum value of SAR (measured) = 0.264 mW/g

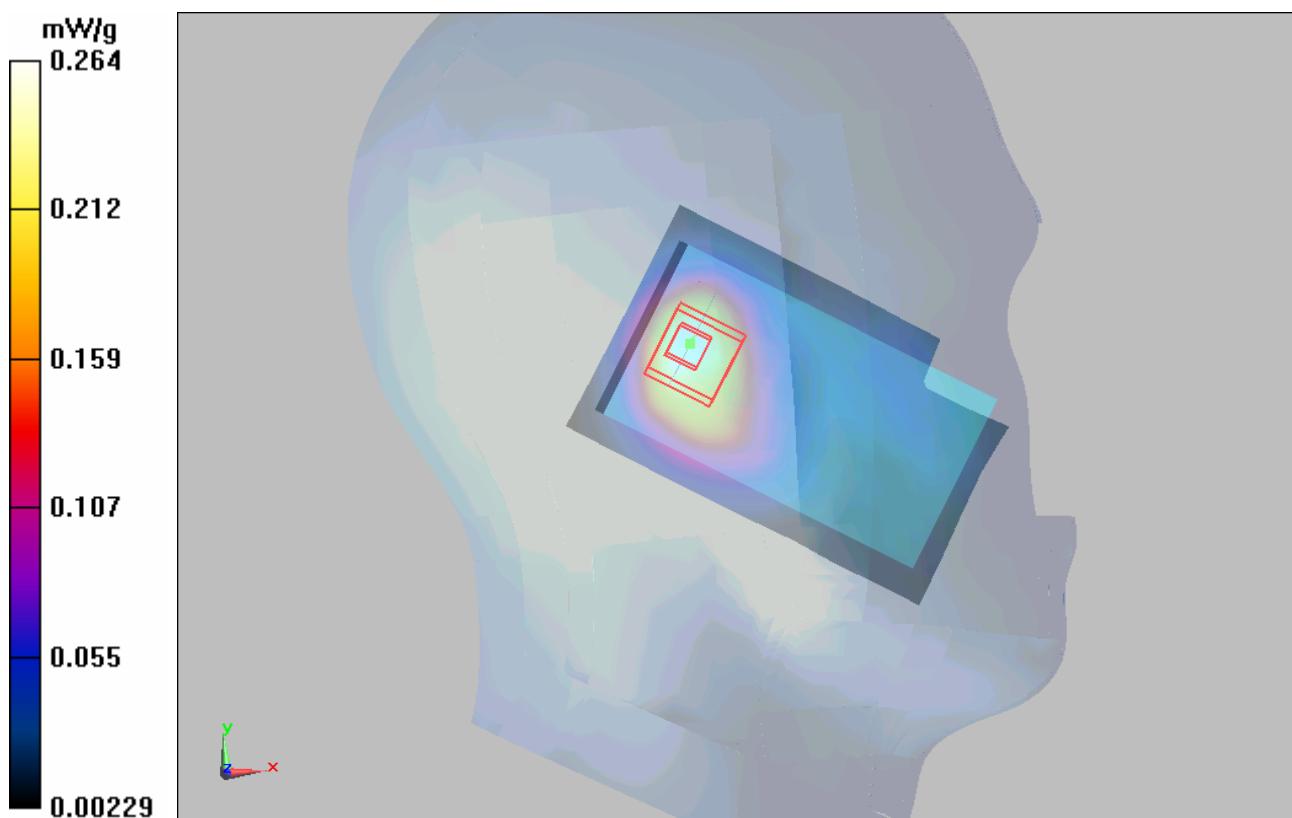


Figure 27 Left Hand Tilt 15° GSM 1900 Channel 661

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0908

Page 70 of 185

### GSM 1900 Right Cheek High

Date/Time: 6/25/2010 1:17:11 AM

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 40.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: X3DV4 - SN3661; ConvF(7.77, 7.77, 7.77); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Cheek High/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.713 mW/g

**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.02 V/m; Power Drift = 0.049 dB

Peak SAR (extrapolated) = 1.19 W/kg

**SAR(1 g) = 0.671 mW/g; SAR(10 g) = 0.349 mW/g**

Maximum value of SAR (measured) = 0.758 mW/g

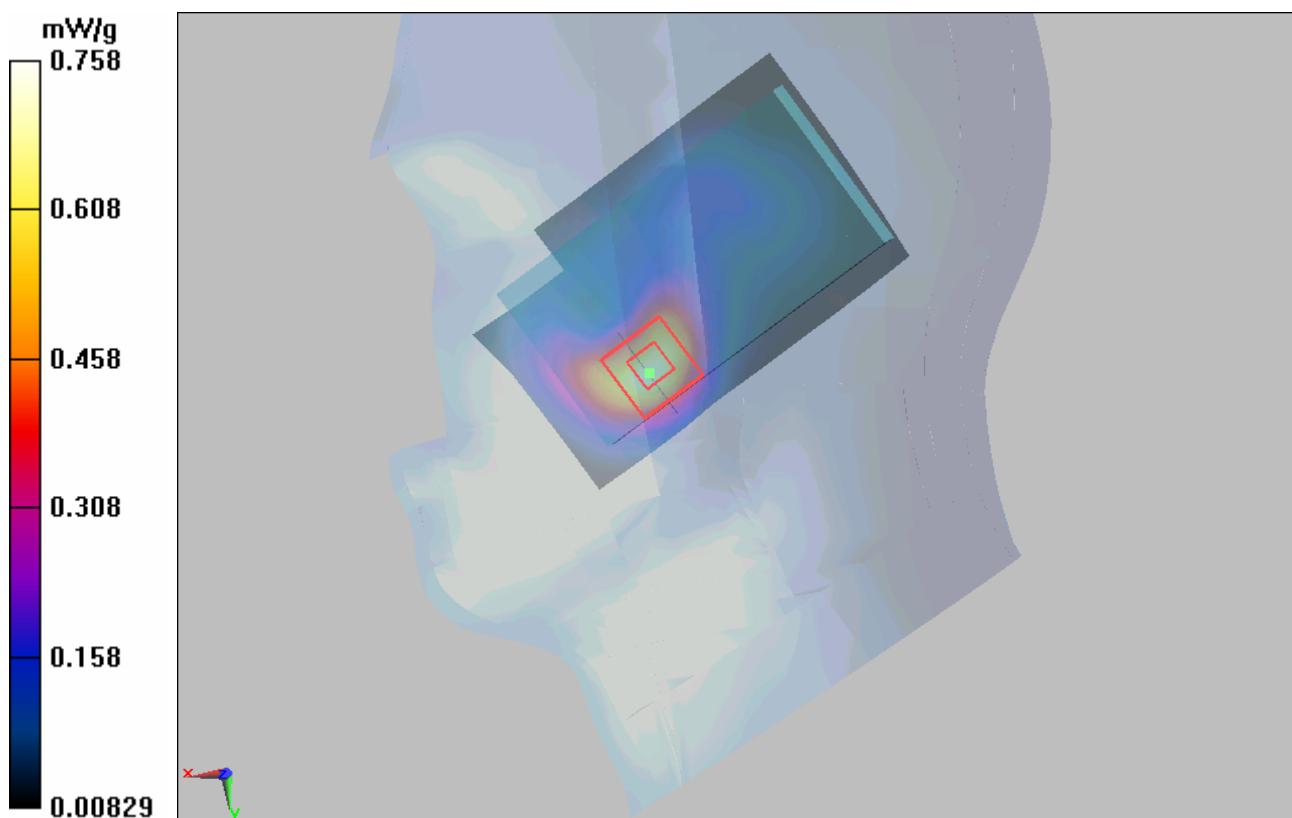


Figure 28 Right Hand Touch Cheek GSM 1900 Channel 810

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 71 of 185

## GSM 1900 Right Cheek Middle

Date/Time: 6/25/2010 12:36:48 AM

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.4$  mho/m;  $\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.77, 7.77, 7.77); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Cheek Middle/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.875 mW/g

**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.75 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 1.45 W/kg

**SAR(1 g) = 0.828 mW/g; SAR(10 g) = 0.434 mW/g**

Maximum value of SAR (measured) = 0.932 mW/g

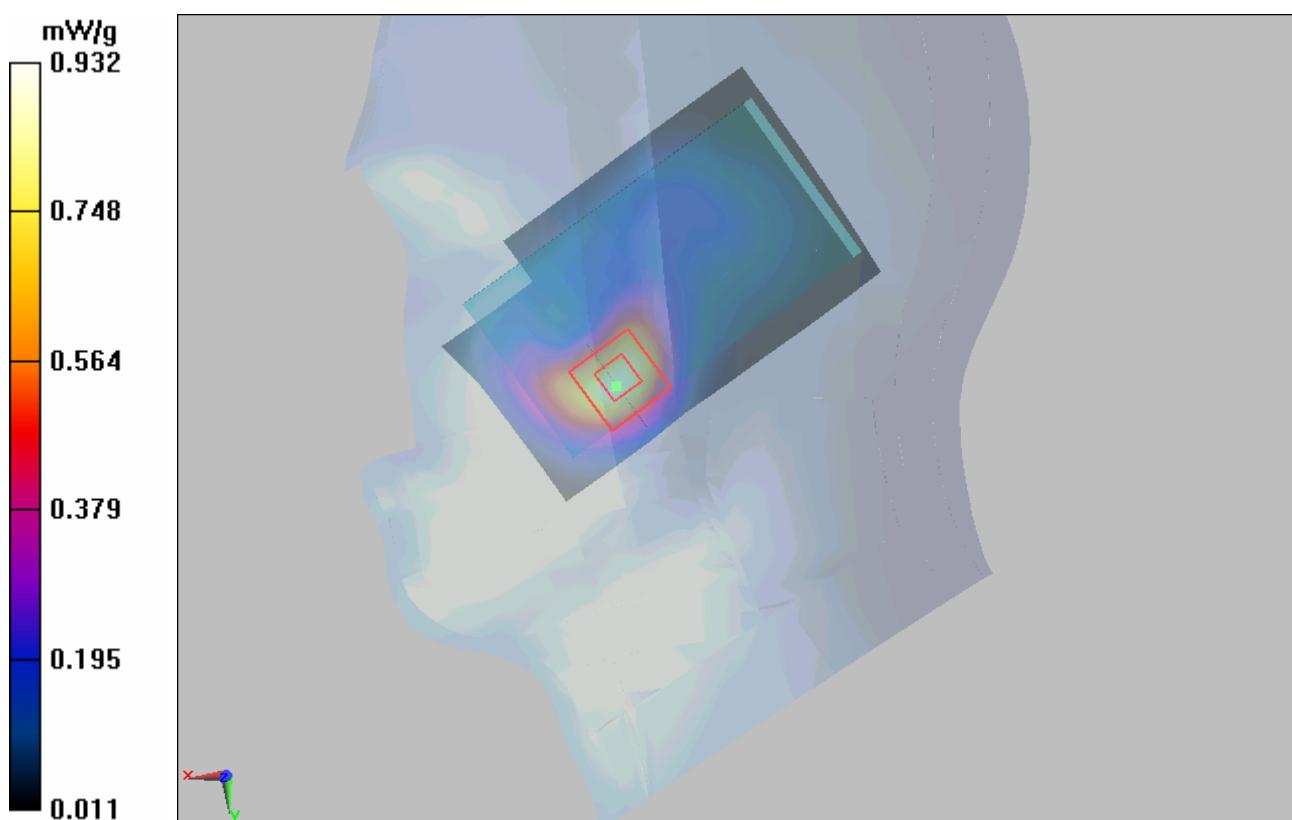


Figure 29 Right Hand Touch Cheek GSM 1900 Channel 661

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0908

Page 72 of 185

**GSM 1900 Right Cheek Low**

Date/Time: 6/25/2010 12:57:07 AM

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.37$  mho/m;  $\epsilon_r = 40.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.77, 7.77, 7.77); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Cheek Low/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.14 mW/g


**Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.01 V/m; Power Drift = 0.166 dB

Peak SAR (extrapolated) = 1.83 W/kg

**SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.557 mW/g**

Maximum value of SAR (measured) = 1.17 mW/g

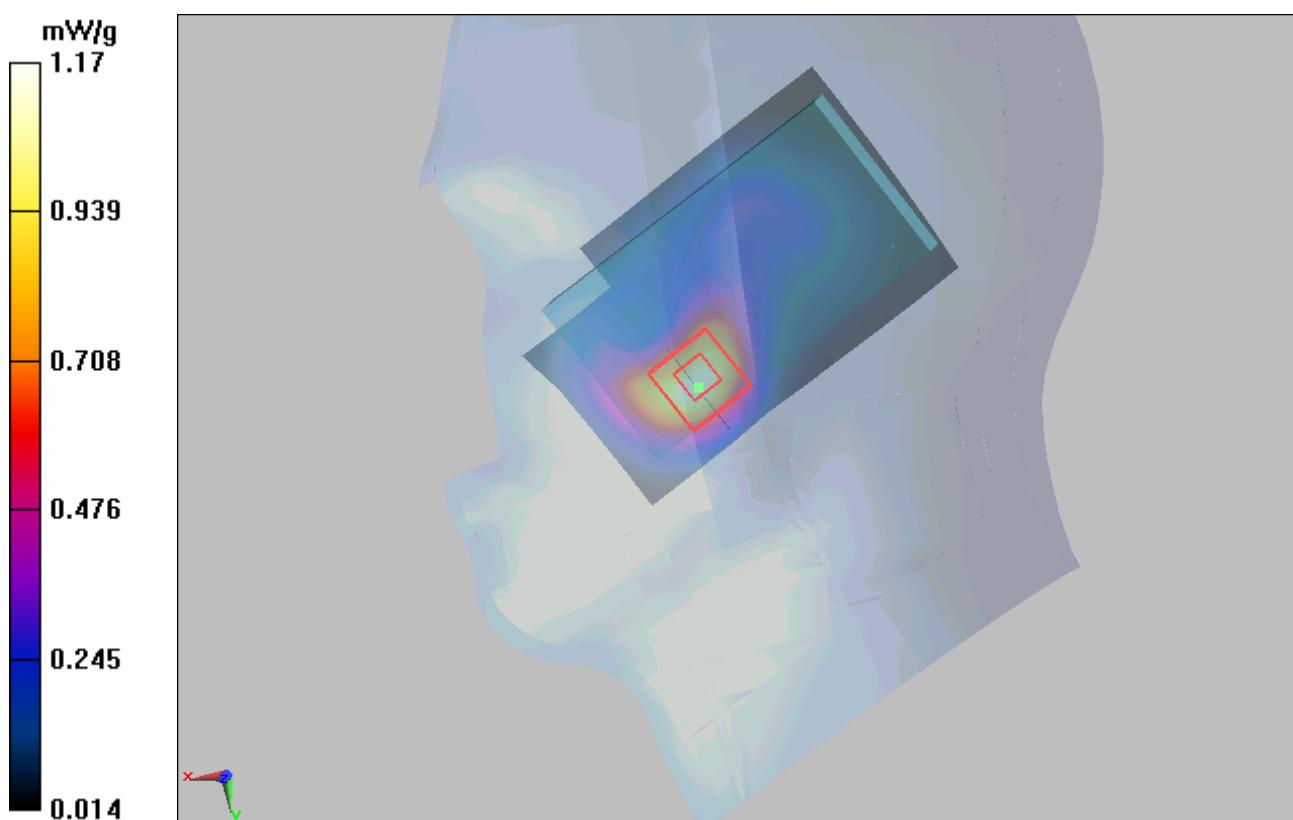

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0908

Page 73 of 185

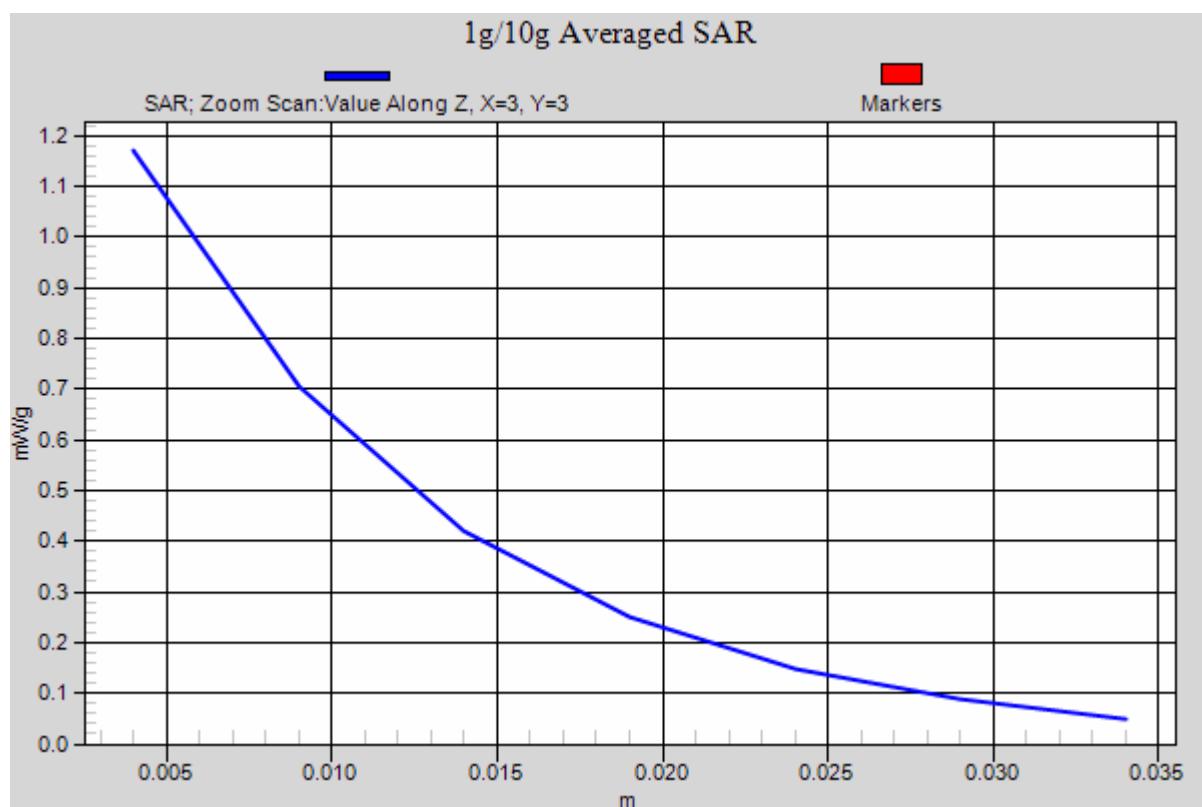


Figure 30 Right Hand Touch Cheek GSM 1900 Channel 512

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 74 of 185

## GSM 1900 Right Tilt Middle

Date/Time: 6/25/2010 1:39:43 AM

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.4$  mho/m;  $\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.77, 7.77, 7.77); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Tilt Middle/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.281 mW/g

**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.9 V/m; Power Drift = 0.067 dB

Peak SAR (extrapolated) = 0.362 W/kg

**SAR(1 g) = 0.244 mW/g; SAR(10 g) = 0.154 mW/g**

Maximum value of SAR (measured) = 0.262 mW/g

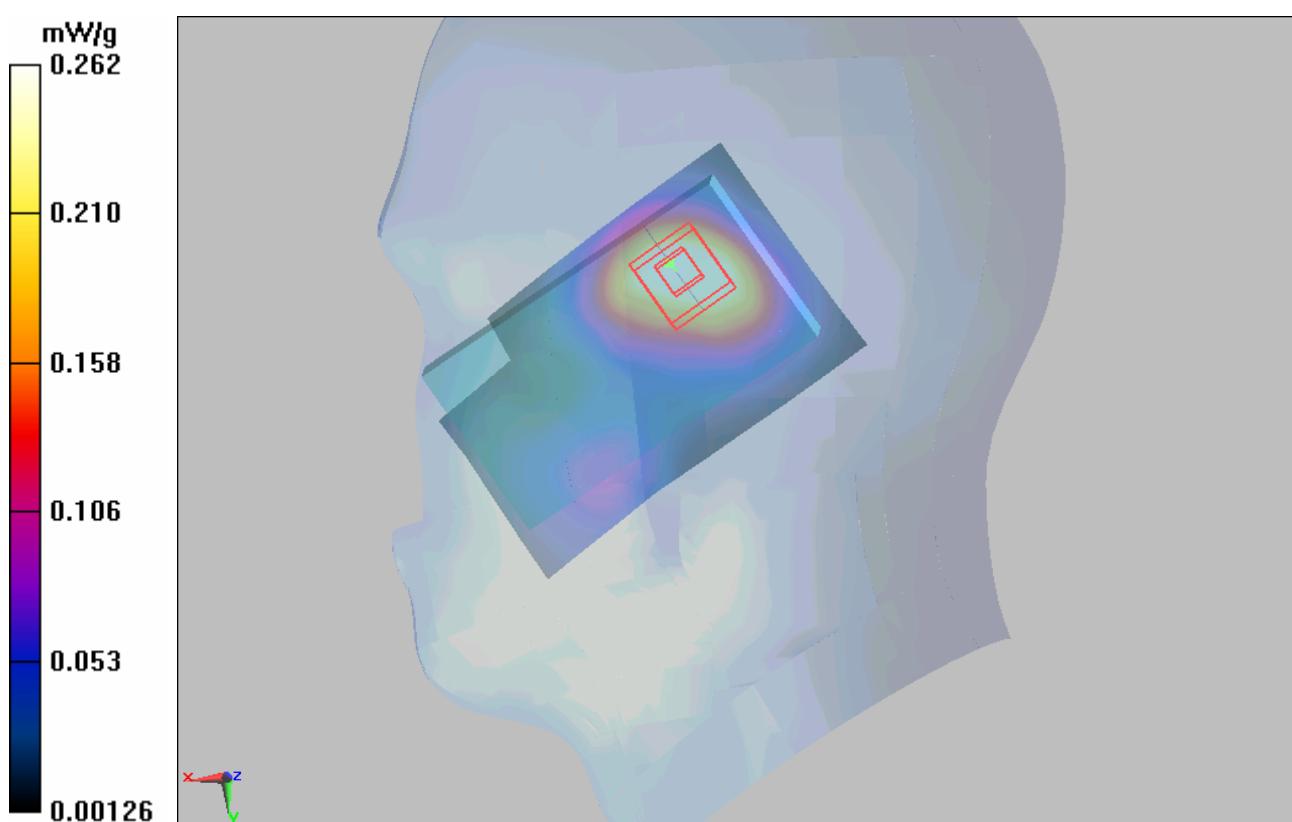


Figure 31 Right Hand Tilt 15° GSM 1900 Channel 661

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 75 of 185

## GSM 1900 Towards Ground High

Date/Time: 6/25/2010 9:51:10 AM

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.58$  mho/m;  $\epsilon_r = 53$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.6, 7.6, 7.6); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Ground High/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.183 mW/g

**Towards Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.4 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 0.273 W/kg

**SAR(1 g) = 0.166 mW/g; SAR(10 g) = 0.097 mW/g**

Maximum value of SAR (measured) = 0.183 mW/g

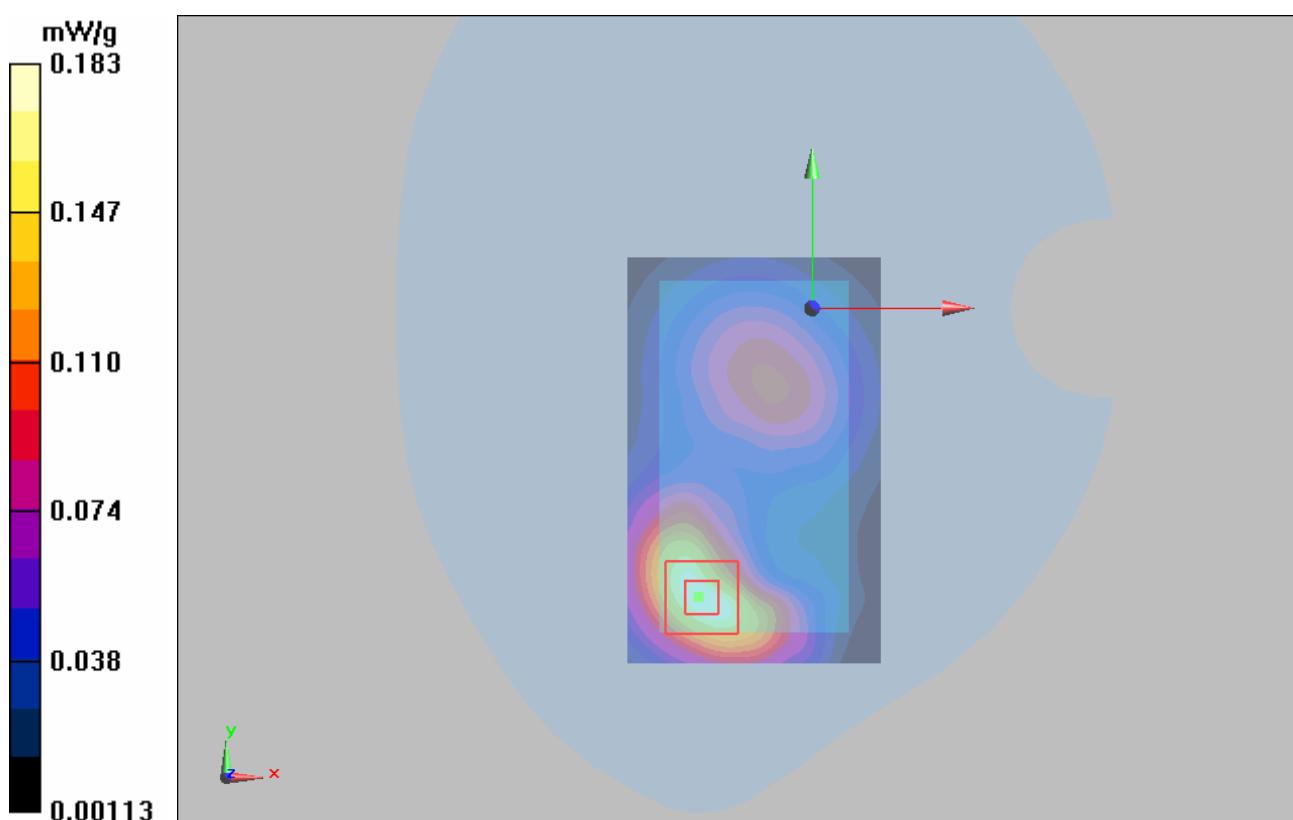


Figure 32 Body, Towards Ground, GSM 1900 Channel 810

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 76 of 185

## GSM 1900 Towards Ground Middle

Date/Time: 6/25/2010 9:30:43 AM

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 53.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.6, 7.6, 7.6); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Ground Middle/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.241 mW/g

**Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.08 V/m; Power Drift = -0.065 dB

Peak SAR (extrapolated) = 0.353 W/kg

**SAR(1 g) = 0.214 mW/g; SAR(10 g) = 0.124 mW/g**

Maximum value of SAR (measured) = 0.234 mW/g

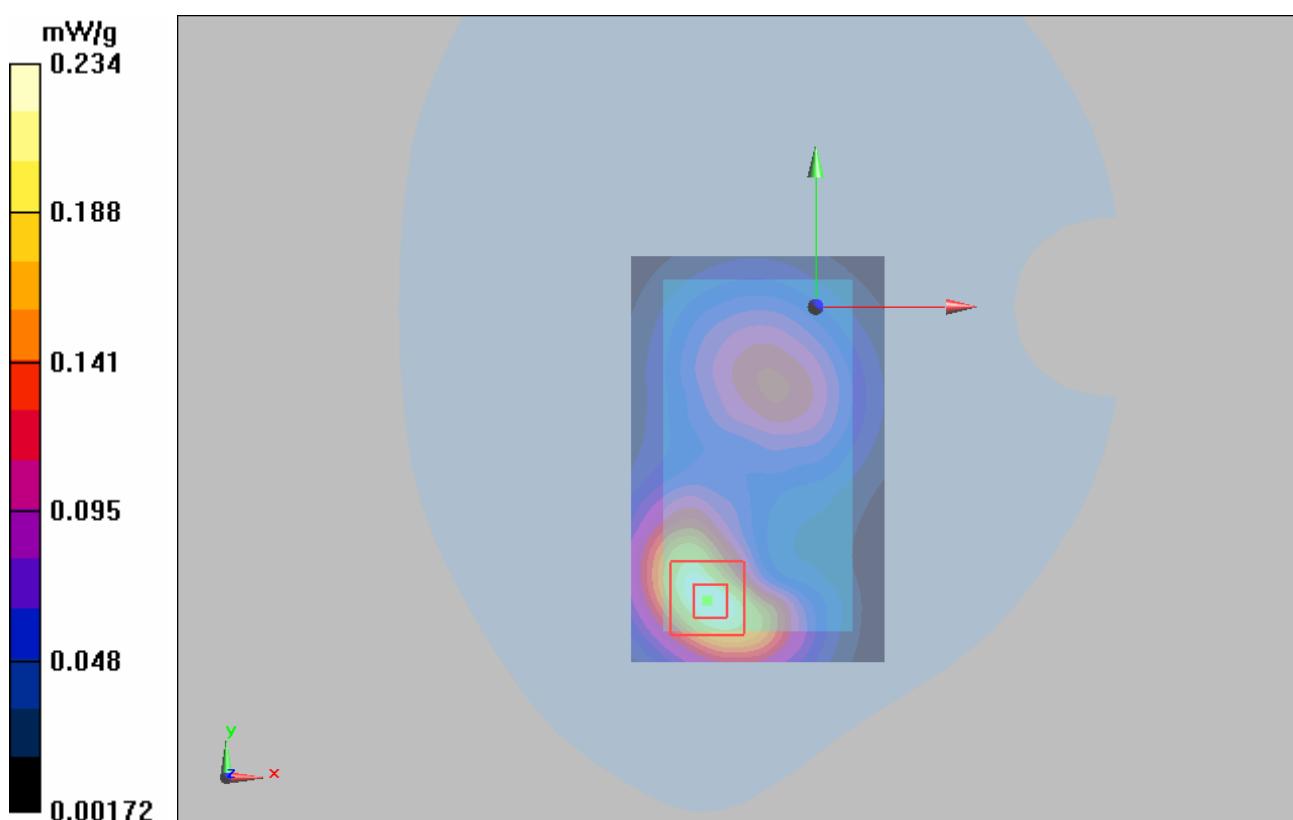


Figure 33 Body, Towards Ground, GSM 1900 Channel 661

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 77 of 185

## GSM 1900 Towards Ground Low

Date/Time: 6/25/2010 10:11:27 AM

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 53.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.6, 7.6, 7.6); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Ground Low/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.329 mW/g

**Towards Ground Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.17 V/m; Power Drift = -0.167 dB

Peak SAR (extrapolated) = 0.481 W/kg

**SAR(1 g) = 0.291 mW/g; SAR(10 g) = 0.169 mW/g**

Maximum value of SAR (measured) = 0.321 mW/g

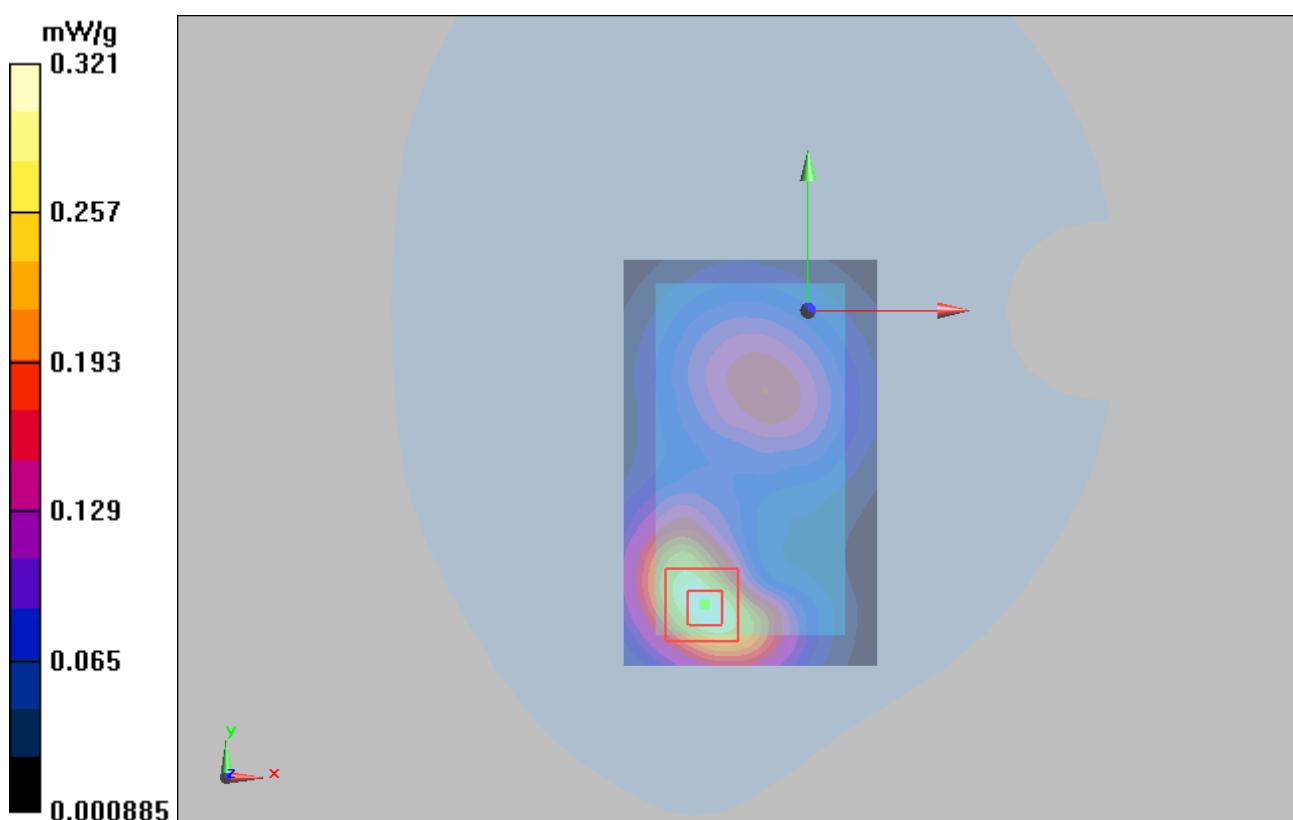


Figure 34 Body, Towards Ground, GSM 1900 Channel 512

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 78 of 185

## GSM 1900 Towards Phantom Middle

Date/Time: 6/25/2010 9:05:11 AM

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 53.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.6, 7.6, 7.6); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Phantom Middle/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.191 mW/g

**Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.5 V/m; Power Drift = 0.079 dB

Peak SAR (extrapolated) = 0.273 W/kg

**SAR(1 g) = 0.170 mW/g; SAR(10 g) = 0.099 mW/g**

Maximum value of SAR (measured) = 0.186 mW/g

**Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.5 V/m; Power Drift = 0.079 dB

Peak SAR (extrapolated) = 0.189 W/kg

**SAR(1 g) = 0.124 mW/g; SAR(10 g) = 0.079 mW/g**

Maximum value of SAR (measured) = 0.134 mW/g

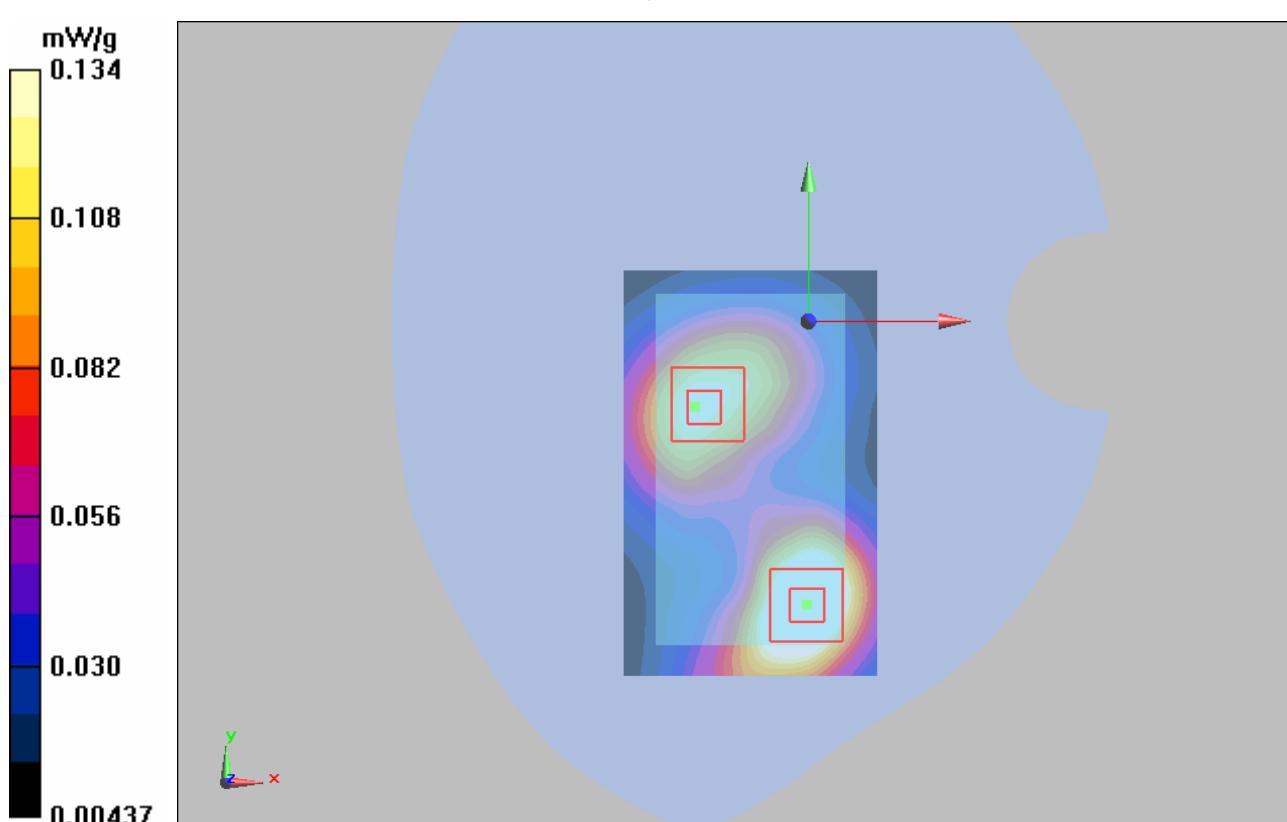


Figure 35 Body, Towards Phantom, GSM 1900 Channel 661

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0908

Page 79 of 185

### **GSM 1900 with Earphone Towards Ground Low**

Date/Time: 6/25/2010 10:38:48 AM

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 53.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.6, 7.6, 7.6); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Ground Low/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.340 mW/g


**Towards Ground Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.02 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 0.495 W/kg

**SAR(1 g) = 0.301 mW/g; SAR(10 g) = 0.174 mW/g**

Maximum value of SAR (measured) = 0.331 mW/g

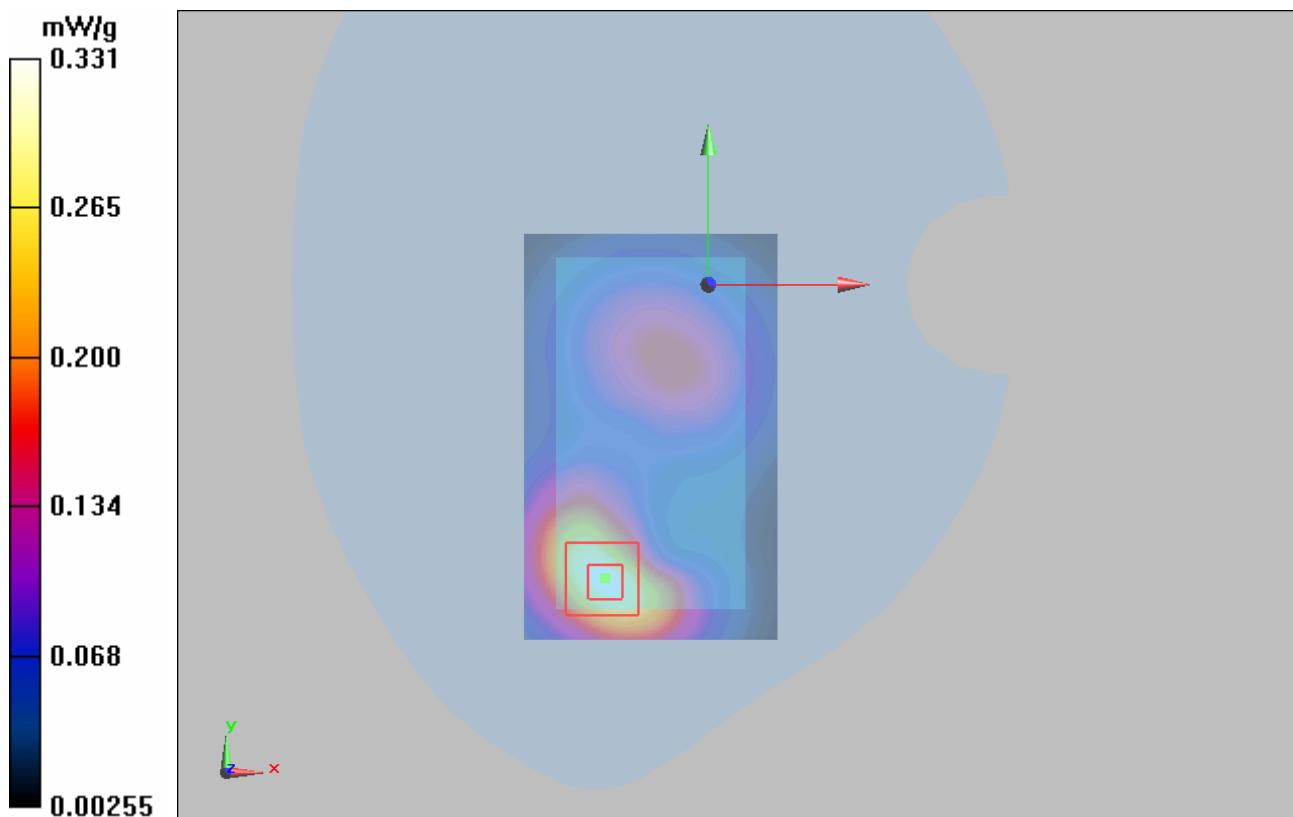

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0908

Page 80 of 185

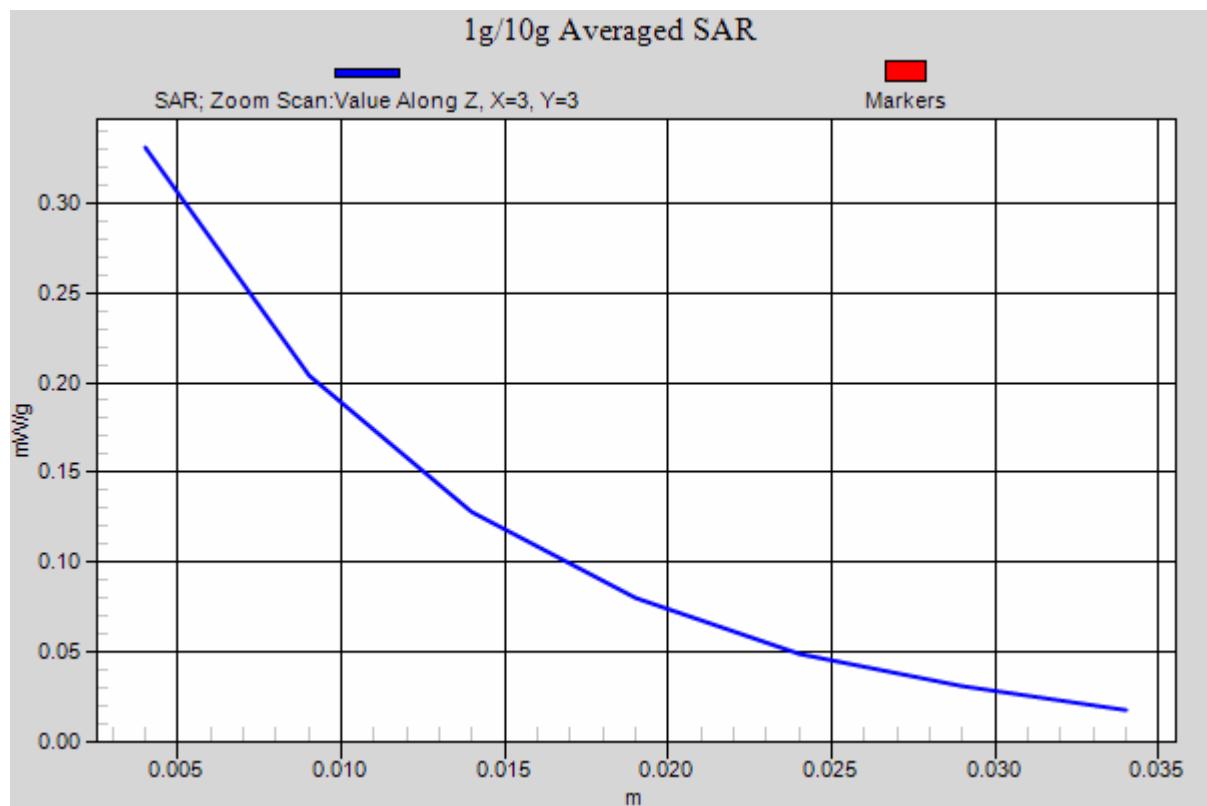


Figure 36 Body with Earphone, Towards Ground, GSM 1900 Channel 512

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0908

Page 81 of 185

### **GSM 1900 GPRS (4Up) Towards Ground Low**

Date/Time: 6/25/2010 9:36:24 PM

Communication System: PCS 1900+GPRS(4Up); Frequency: 1850.2 MHz; Duty Cycle: 1:2.075

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 53.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.6, 7.6, 7.6); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Ground Low/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.331 mW/g

**Towards Ground Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.22 V/m; Power Drift = -0.105 dB

Peak SAR (extrapolated) = 0.488 W/kg

**SAR(1 g) = 0.298 mW/g; SAR(10 g) = 0.175 mW/g**

Maximum value of SAR (measured) = 0.324 mW/g

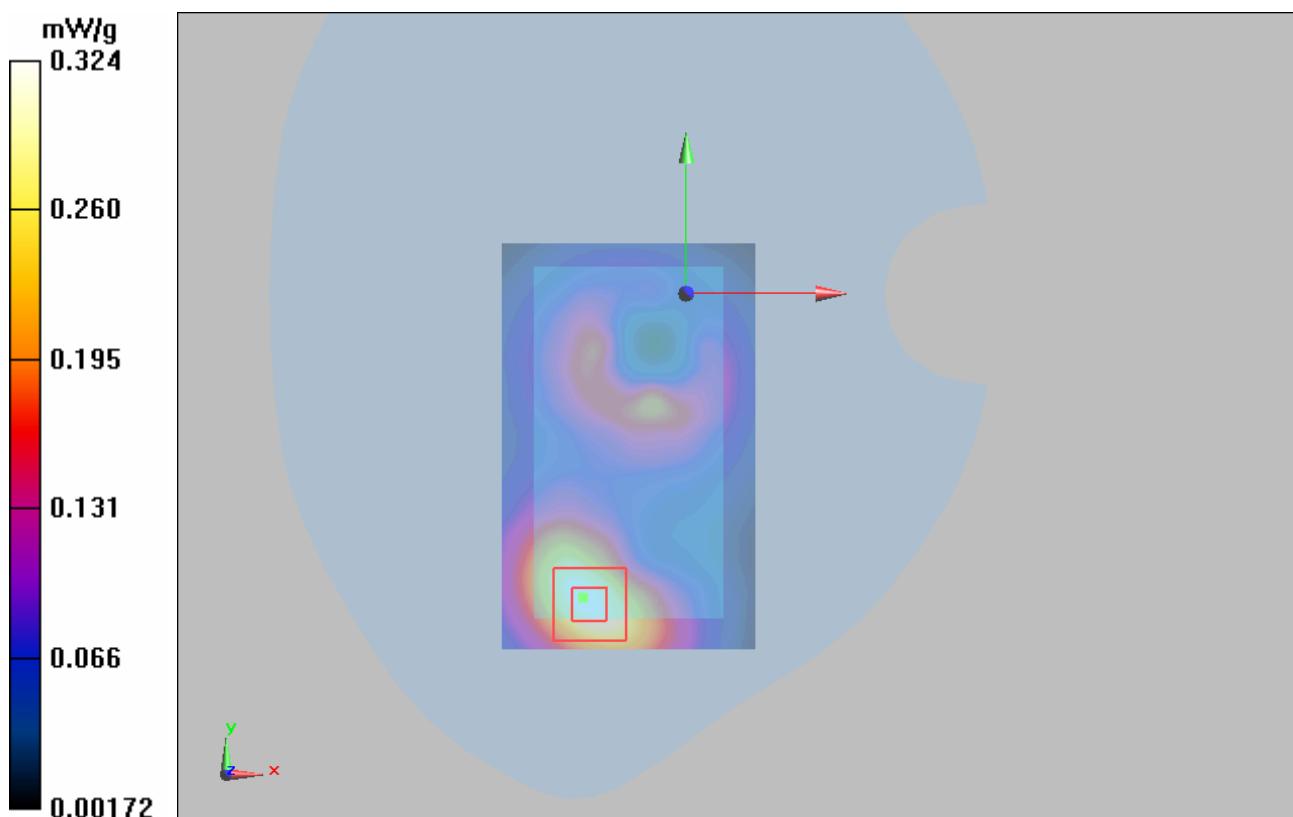


Figure 37 Body, Towards Ground, GSM 1900 GPRS (4Up) Channel 512

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0908

Page 82 of 185

**GSM 1900 EGPRS (4Up) Towards Ground Low**

Date/Time: 6/25/2010 9:58:04 PM

Communication System: PCS 1900+EGPRS(4Up); Frequency: 1850.2 MHz; Duty Cycle: 1:2.075

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 53.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.6, 7.6, 7.6); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Ground Low/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.326 mW/g

**Towards Ground Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.16 V/m; Power Drift = -0.091 dB

Peak SAR (extrapolated) = 0.478 W/kg

**SAR(1 g) = 0.296 mW/g; SAR(10 g) = 0.173 mW/g**

Maximum value of SAR (measured) = 0.323 mW/g

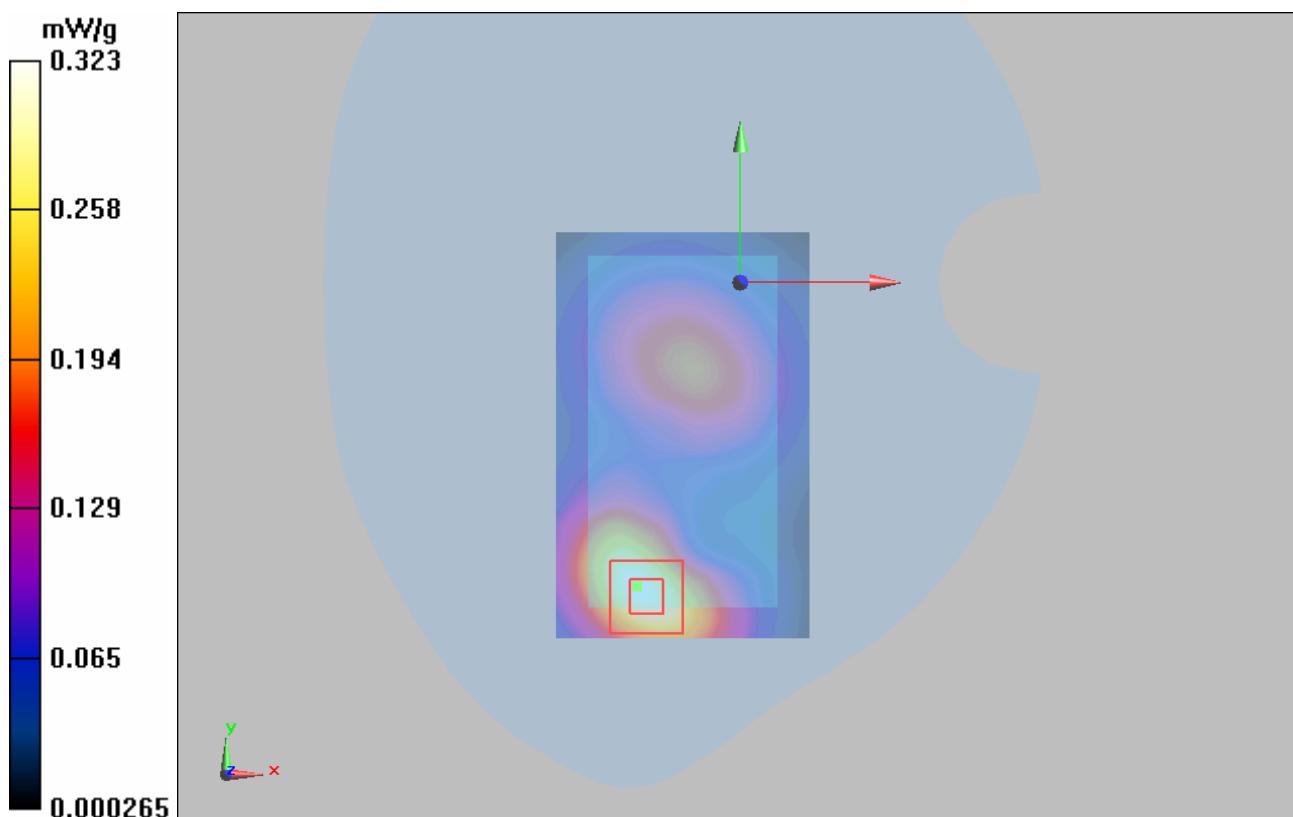


Figure 38 Body, Towards Ground, GSM 1900 EGPRS (4Up) Channel 512

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 83 of 185

## WCDMA Band II Left Cheek High

Date/Time: 6/24/2010 10:21:52 PM

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 40.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: X3DV4 - SN3661; ConvF(7.77, 7.77, 7.77); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Cheek High/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.950 mW/g

**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.8 V/m; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 1.5 W/kg

**SAR(1 g) = 0.902 mW/g; SAR(10 g) = 0.501 mW/g**

Maximum value of SAR (measured) = 0.991 mW/g

**Cheek High/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.8 V/m; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 1.47 W/kg

**SAR(1 g) = 0.801 mW/g; SAR(10 g) = 0.404 mW/g**

Maximum value of SAR (measured) = 0.952 mW/g

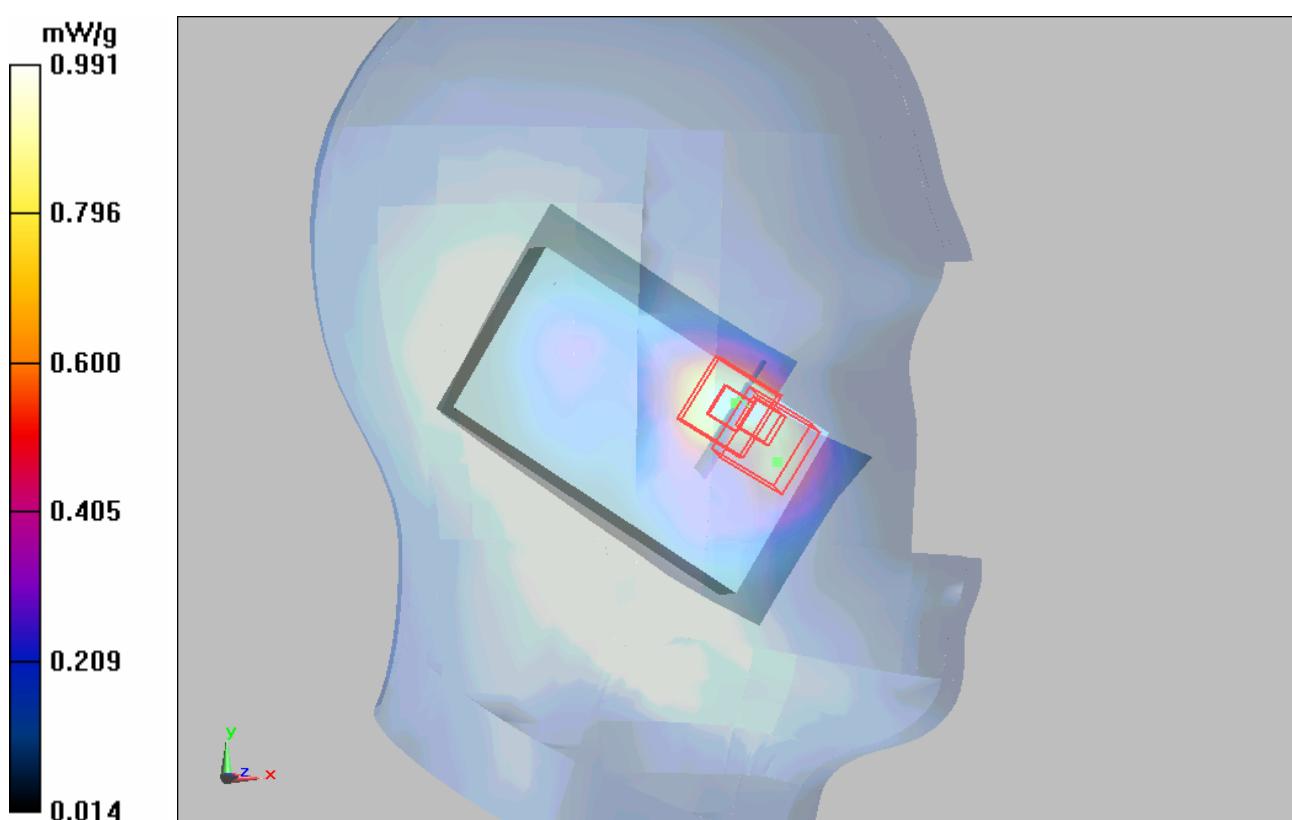


Figure 39 Left Hand Touch Cheek WCDMA Band II Channel 9262

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0908

Page 84 of 185

**WCDMA Band II Left Cheek Middle**

Date/Time: 6/24/2010 9:40:09 PM

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.4$  mho/m;  $\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.77, 7.77, 7.77); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Cheek Middle/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.11 mW/g

**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.8 V/m; Power Drift = 0.050 dB

Peak SAR (extrapolated) = 1.74 W/kg

**SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.589 mW/g**

Maximum value of SAR (measured) = 1.15 mW/g

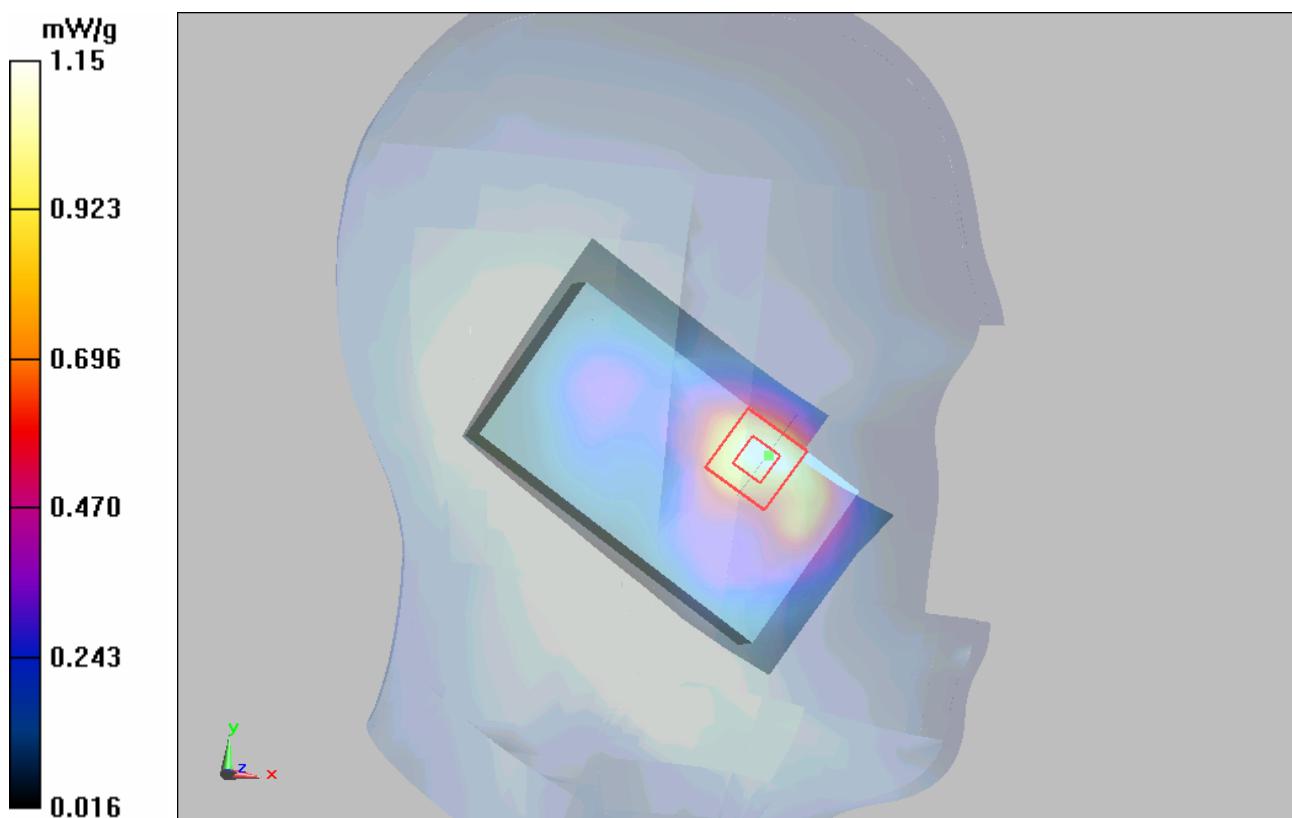


Figure 40 Left Hand Touch Cheek WCDMA Band II Channel 9400

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0908

Page 85 of 185

**WCDMA Band II Left Cheek Low**

Date/Time: 6/24/2010 9:19:06 PM

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.37$  mho/m;  $\epsilon_r = 40.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.77, 7.77, 7.77); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Cheek Low/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.19 mW/g

**Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.9 V/m; Power Drift = 0.082 dB

Peak SAR (extrapolated) = 1.87 W/kg

**SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.643 mW/g**

Maximum value of SAR (measured) = 1.27 mW/g

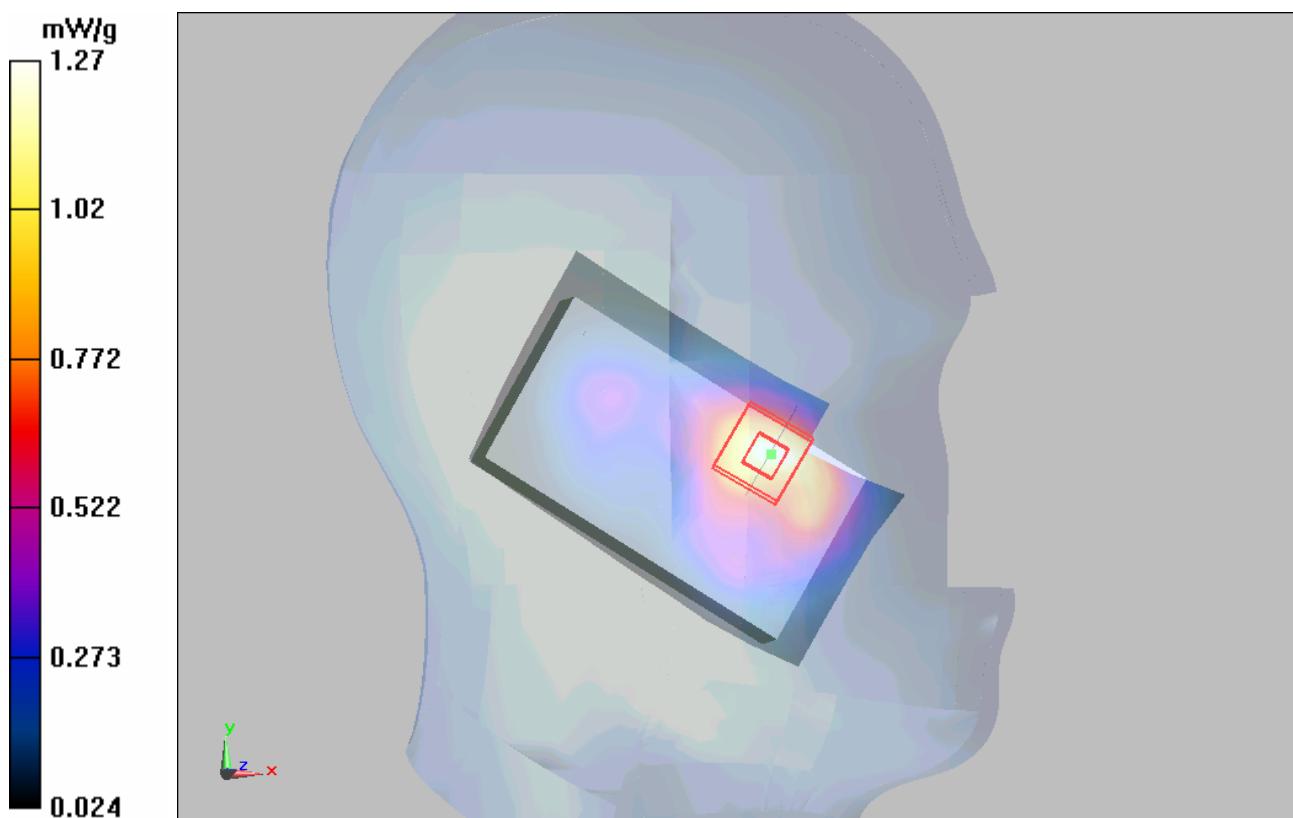


Figure 41 Left Hand Touch Cheek WCDMA Band II Channel 9538

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 86 of 185

## WCDMA Band II Left Tilt Middle

Date/Time: 6/24/2010 10:43:22 PM

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.4$  mho/m;  $\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.77, 7.77, 7.77); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Tilt Middle/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.435 mW/g

**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.5 V/m; Power Drift = 0.017 dB

Peak SAR (extrapolated) = 0.596 W/kg

**SAR(1 g) = 0.376 mW/g; SAR(10 g) = 0.226 mW/g**

Maximum value of SAR (measured) = 0.412 mW/g

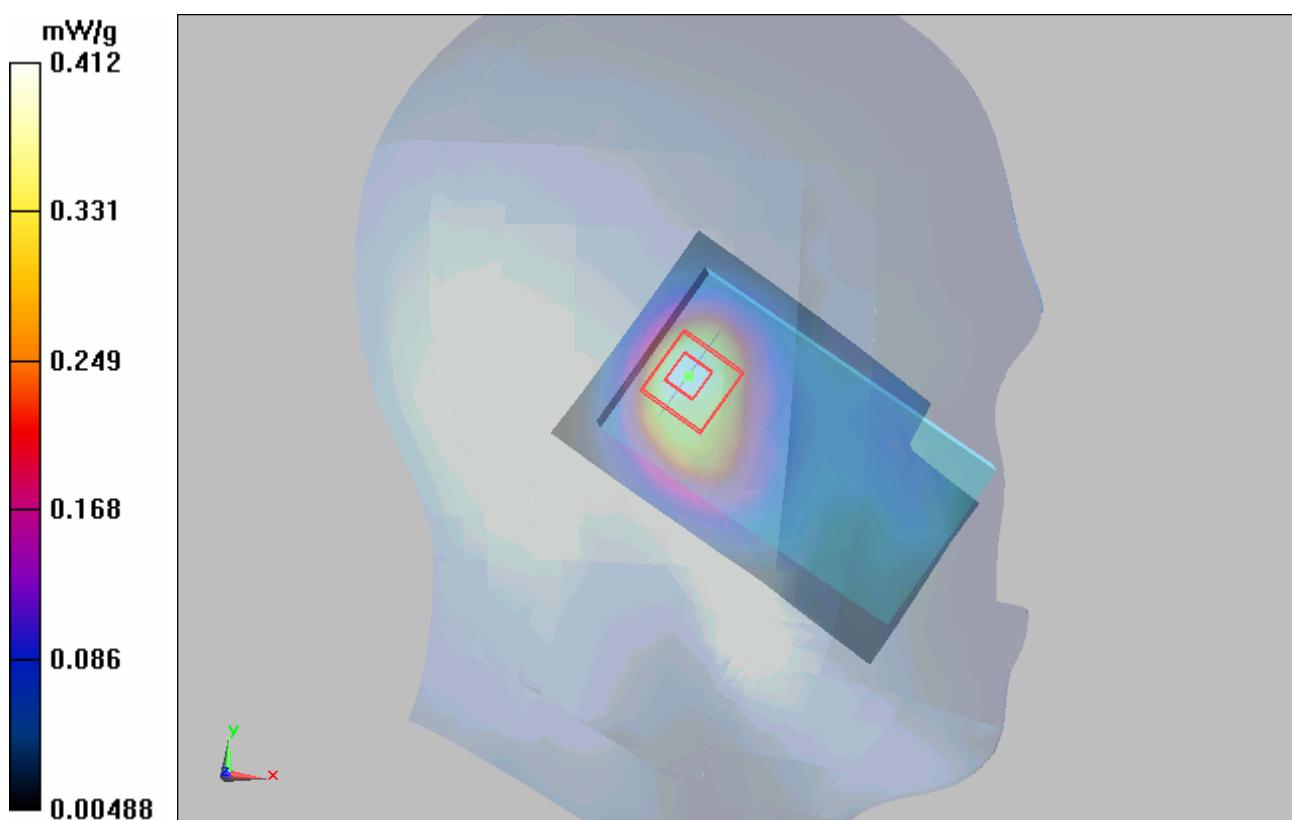


Figure 42 Left Hand Tilt 15° WCDMA Band II Channel 9400

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0908

Page 87 of 185

### WCDMA Band II Right Cheek High

Date/Time: 6/24/2010 11:23:33 PM

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 40.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: X3DV4 - SN3661; ConvF(7.77, 7.77, 7.77); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Cheek High/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.19 mW/g

**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.41 V/m; Power Drift = 0.045 dB

Peak SAR (extrapolated) = 1.9 W/kg

**SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.563 mW/g**

Maximum value of SAR (measured) = 1.2 mW/g

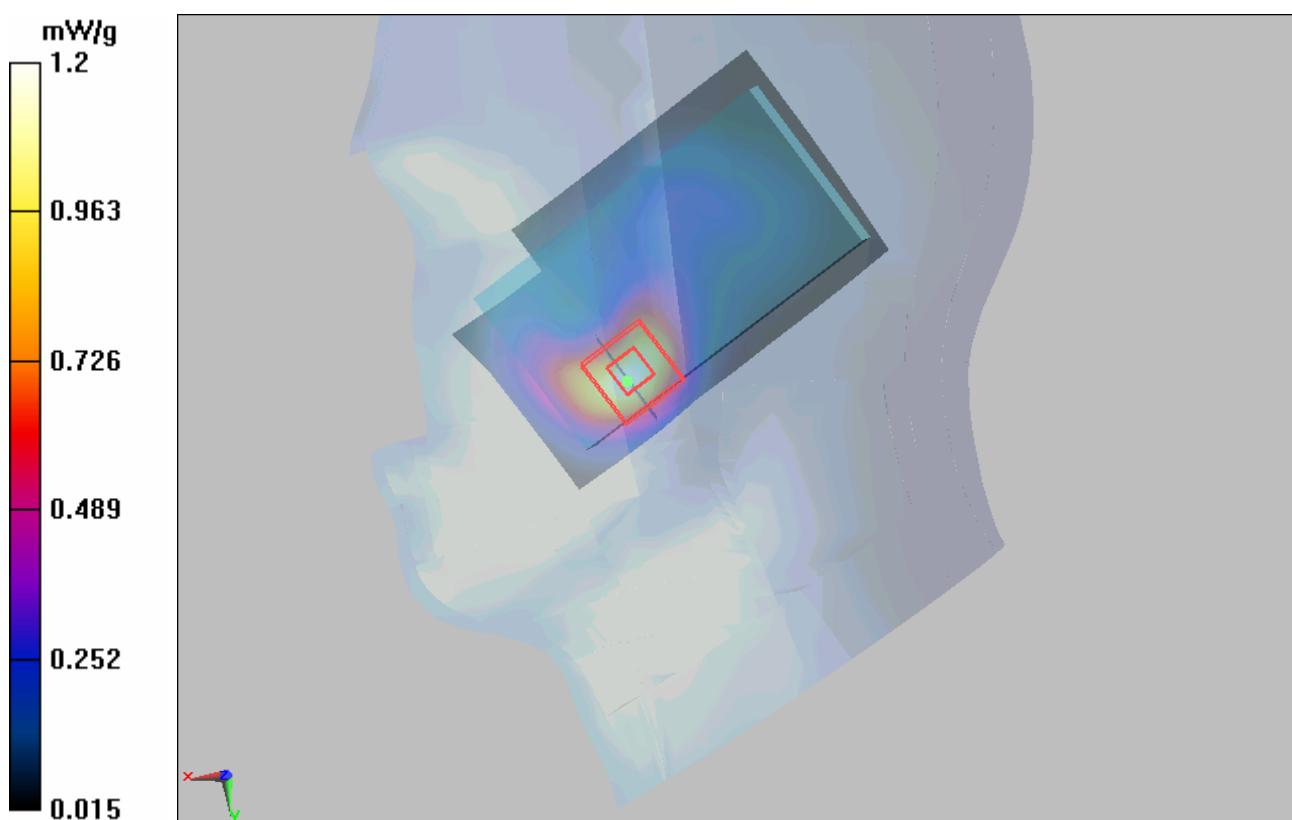


Figure 43 Right Hand Touch Cheek WCDMA Band II Channel 9538

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0908

Page 88 of 185

### **WCDMA Band II Right Cheek Middle**

Date/Time: 6/24/2010 11:26:44 AM

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.4$  mho/m;  $\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.77, 7.77, 7.77); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Cheek Middle/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.27 mW/g

**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.39 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 2.04 W/kg

**SAR(1 g) = 1.18 mW/g; SAR(10 g) = 0.622 mW/g**

Maximum value of SAR (measured) = 1.32 mW/g

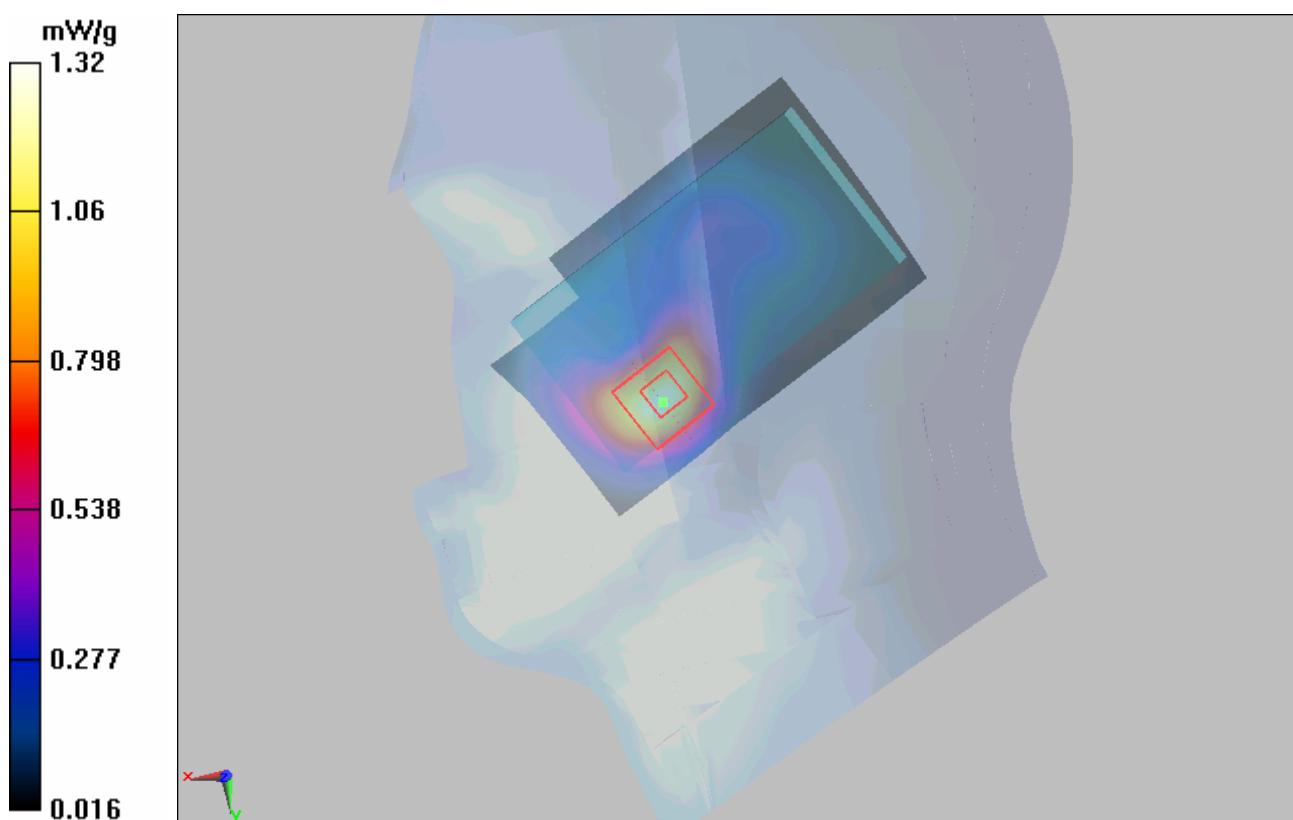


Figure 44 Right Hand Touch Cheek WCDMA Band II Channel 9400

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 89 of 185

## WCDMA Band II Right Cheek Low

Date/Time: 6/24/2010 11:48:19 AM

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.37$  mho/m;  $\epsilon_r = 40.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.77, 7.77, 7.77); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Cheek Low/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.44 mW/g


**Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.56 V/m; Power Drift = 0.056 dB

Peak SAR (extrapolated) = 2.26 W/kg

**SAR(1 g) = 1.33 mW/g; SAR(10 g) = 0.710 mW/g**

Maximum value of SAR (measured) = 1.51 mW/g

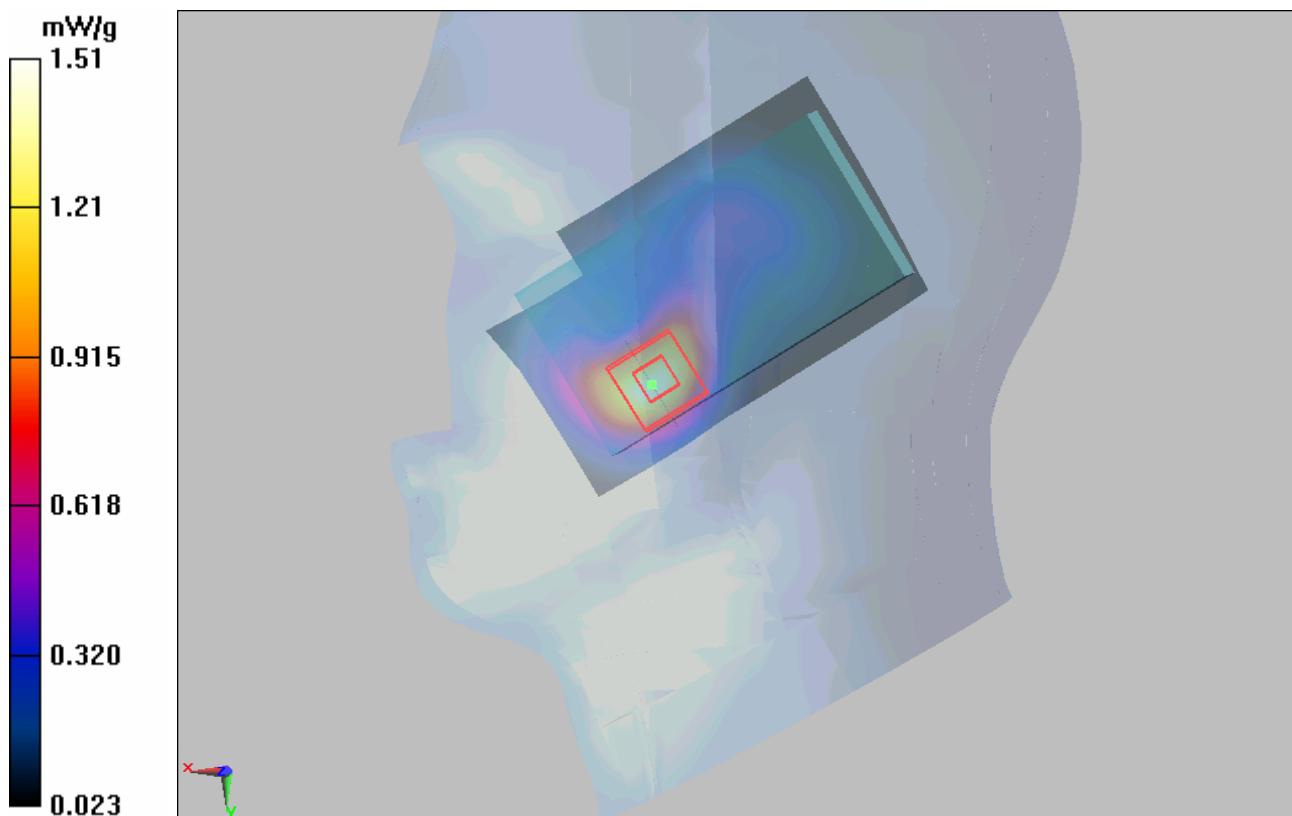

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0908

Page 90 of 185

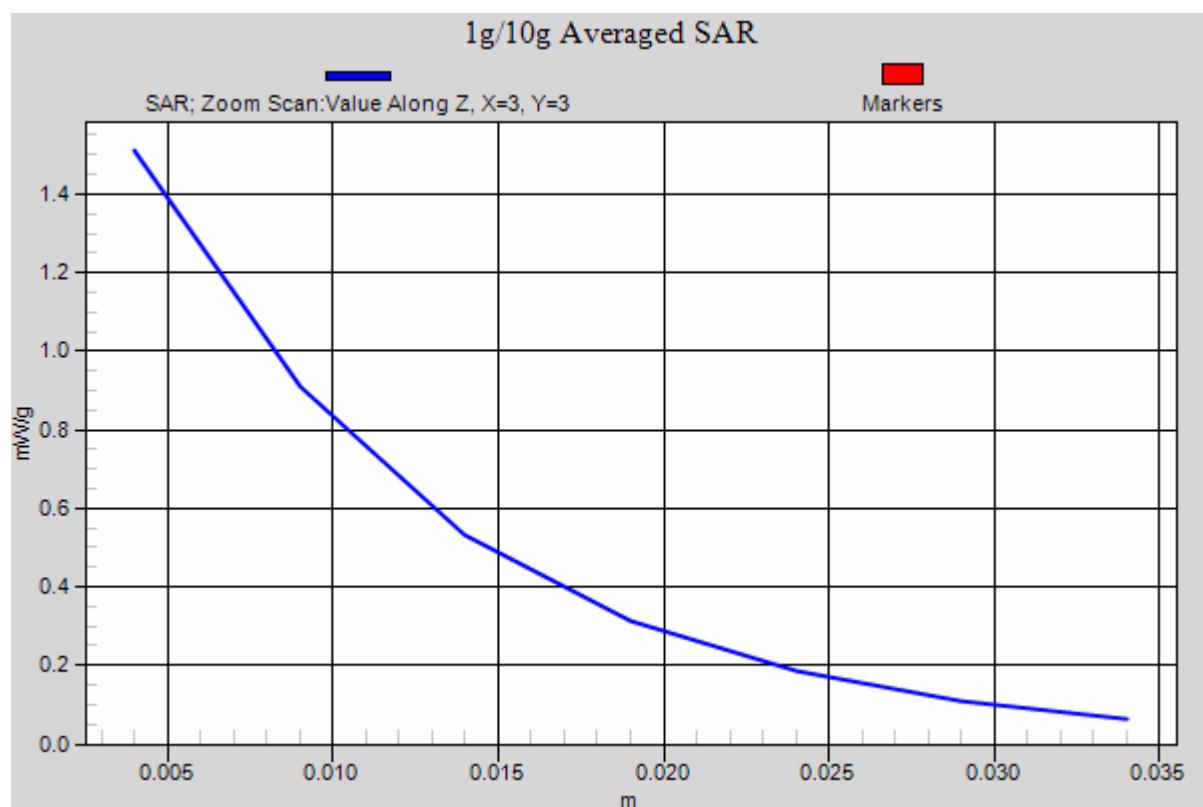


Figure 45 Right Hand Touch Cheek WCDMA Band II Channel 9262

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 91 of 185

## WCDMA Band II Right Tilt Middle

Date/Time: 6/25/2010 12:05:03 AM

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.4$  mho/m;  $\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.77, 7.77, 7.77); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Tilt Middle/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.418 mW/g

**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.4 V/m; Power Drift = 0.081 dB

Peak SAR (extrapolated) = 0.558 W/kg

**SAR(1 g) = 0.368 mW/g; SAR(10 g) = 0.232 mW/g**

Maximum value of SAR (measured) = 0.397 mW/g

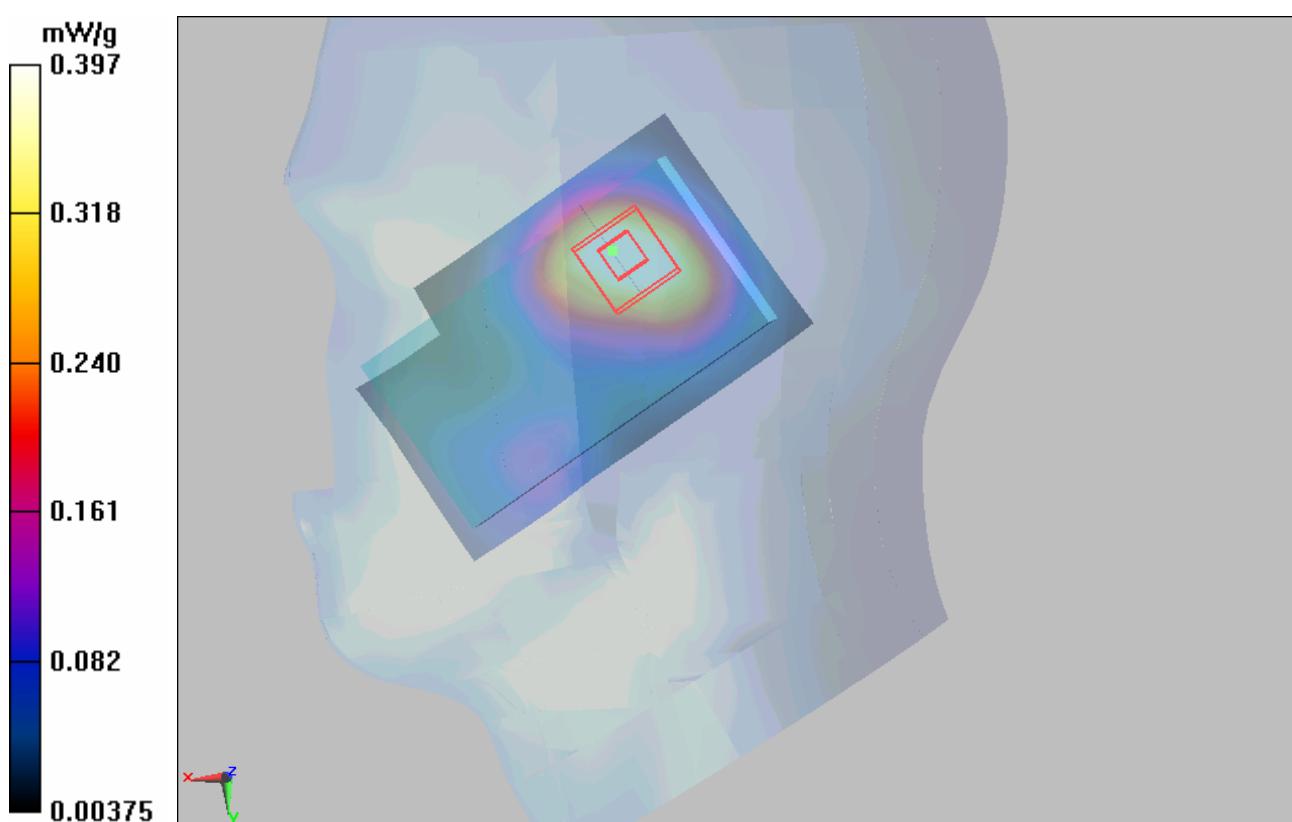


Figure 46 Right Hand Tilt 15° WCDMA Band II Channel 9400

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0908

Page 92 of 185

### **WCDMA Band II Towards Ground High**

Date/Time: 6/25/2010 11:31:50 AM

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.57$  mho/m;  $\epsilon_r = 53$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5°C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.6, 7.6, 7.6); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Ground High/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.289 mW/g

**Towards Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.44 V/m; Power Drift = 0.139 dB

Peak SAR (extrapolated) = 0.411 W/kg

**SAR(1 g) = 0.251 mW/g; SAR(10 g) = 0.148 mW/g**

Maximum value of SAR (measured) = 0.275 mW/g

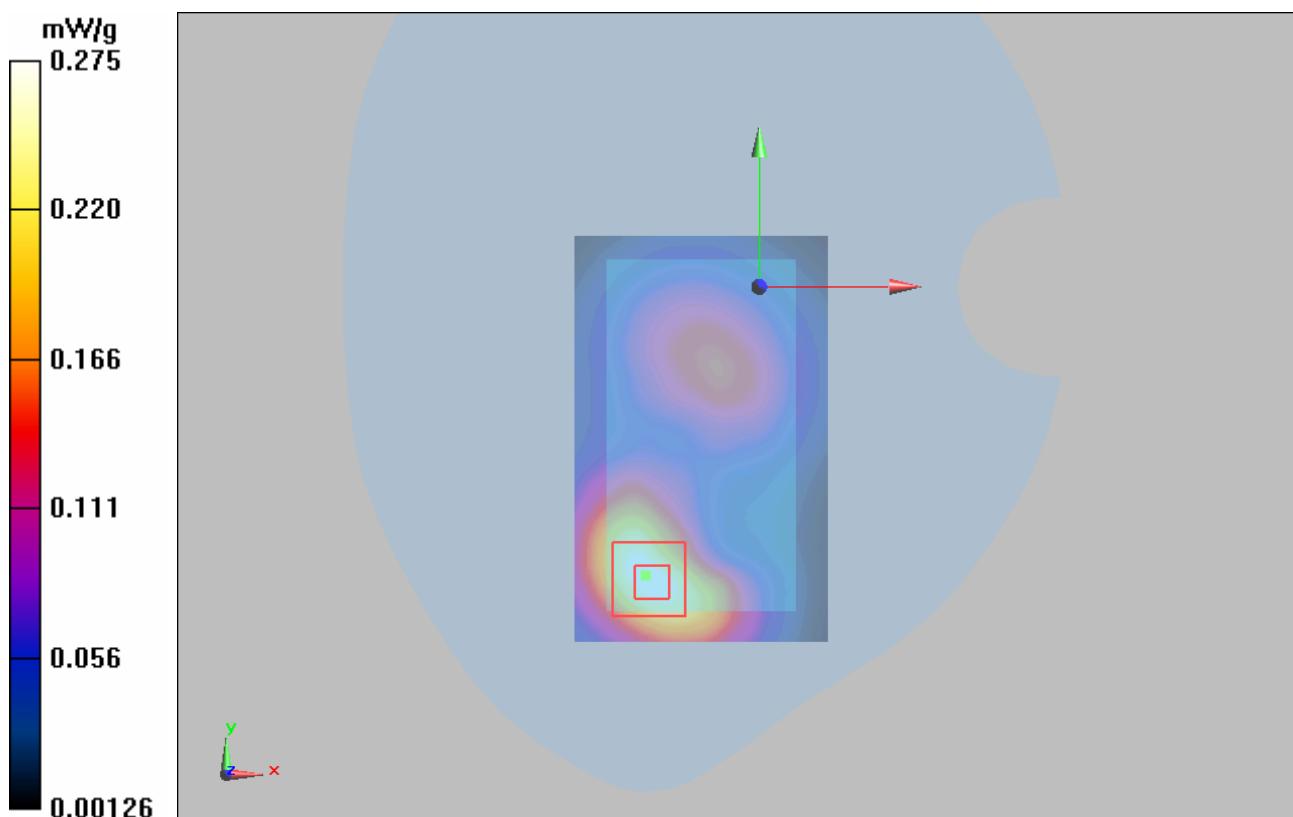


Figure 47 Body, Towards Ground, WCDMA Band II Channel 9262

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0908

Page 93 of 185

### **WCDMA Band II Towards Ground Middle**

Date/Time: 6/25/2010 11:11:27 AM

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 53.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.6, 7.6, 7.6); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Ground Middle/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.326 mW/g

**Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.76 V/m; Power Drift = 0.119 dB

Peak SAR (extrapolated) = 0.471 W/kg

**SAR(1 g) = 0.288 mW/g; SAR(10 g) = 0.168 mW/g**

Maximum value of SAR (measured) = 0.314 mW/g

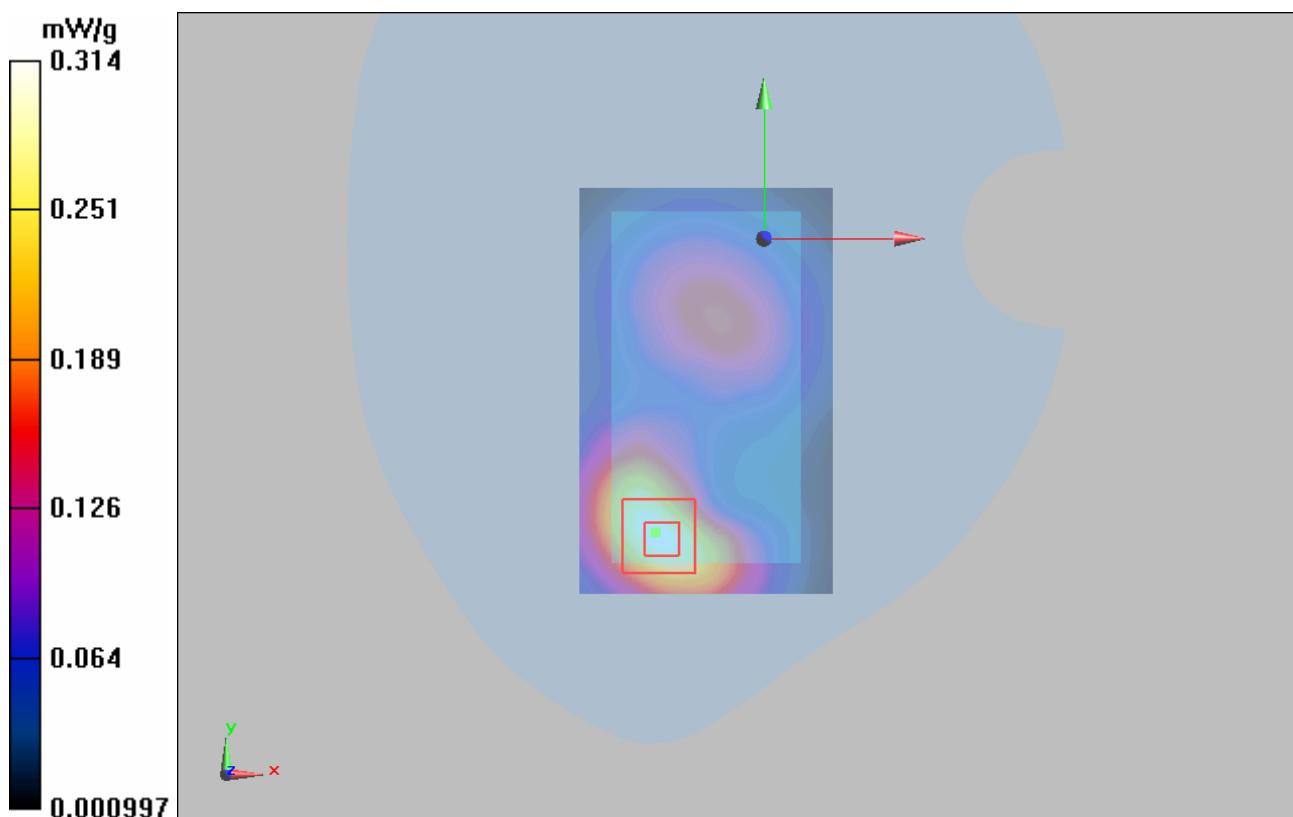


Figure 48 Body, Towards Ground, WCDMA Band II Channel 9400

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 94 of 185

## WCDMA Band II Towards Ground Low

Date/Time: 6/25/2010 11:52:32 AM

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 53.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.6, 7.6, 7.6); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Ground Low/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.397 mW/g


**Towards Ground Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.72 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 0.568 W/kg

**SAR(1 g) = 0.347 mW/g; SAR(10 g) = 0.202 mW/g**

Maximum value of SAR (measured) = 0.381 mW/g

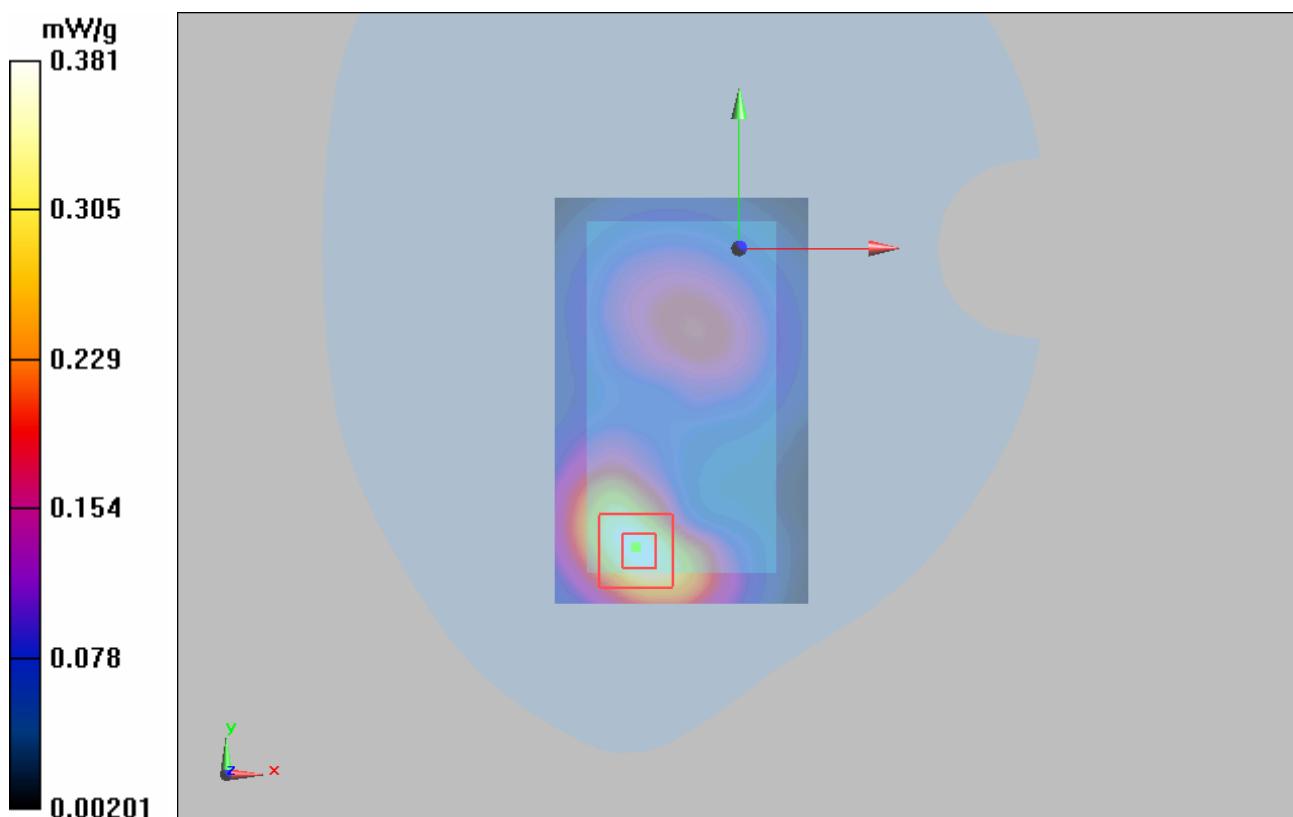

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0908

Page 95 of 185

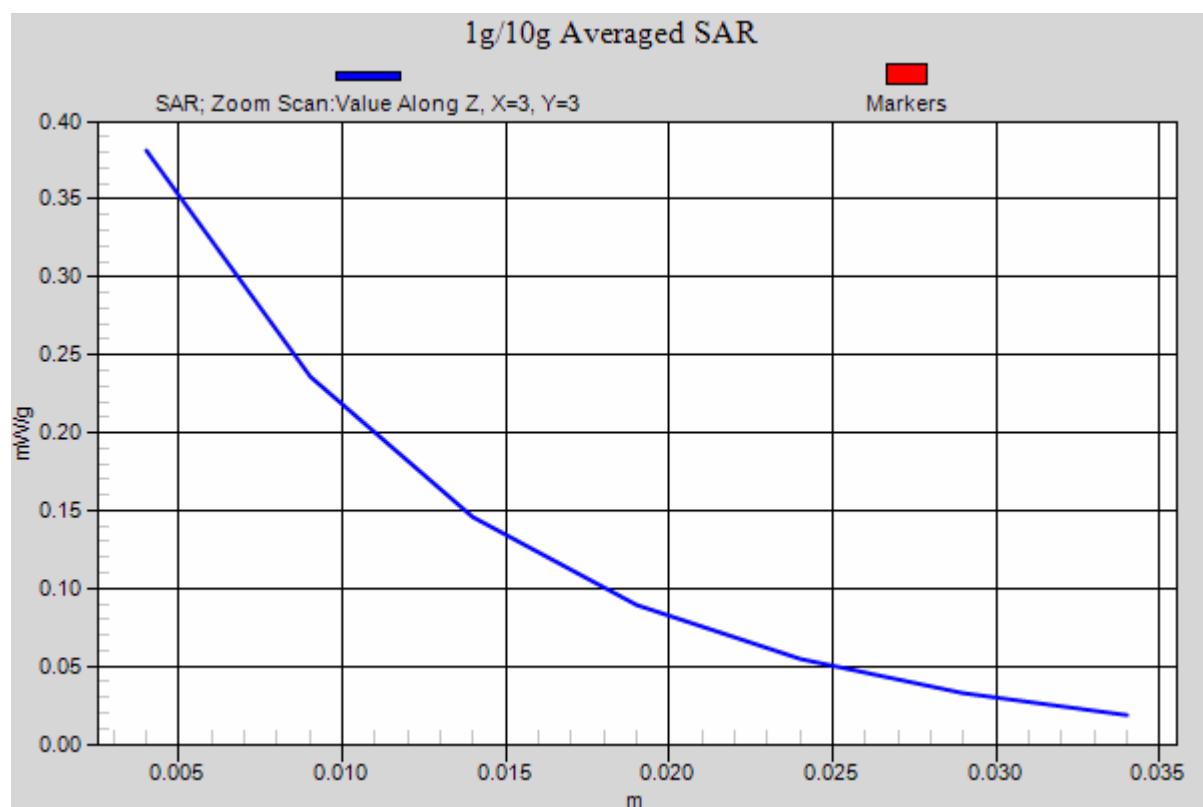


Figure 49 Body, Towards Ground, WCDMA Band II Channel 9538

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 96 of 185

## WCDMA Band II Towards Phantom Middle

Date/Time: 6/25/2010 8:29:43 AM

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 53.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.6, 7.6, 7.6); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Phantom Middle/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.284 mW/g

**Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.99 V/m; Power Drift = 0.148 dB

Peak SAR (extrapolated) = 0.410 W/kg

**SAR(1 g) = 0.255 mW/g; SAR(10 g) = 0.149 mW/g**

Maximum value of SAR (measured) = 0.280 mW/g

**Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.99 V/m; Power Drift = 0.148 dB

Peak SAR (extrapolated) = 0.282 W/kg

**SAR(1 g) = 0.185 mW/g; SAR(10 g) = 0.118 mW/g**

Maximum value of SAR (measured) = 0.200 mW/g

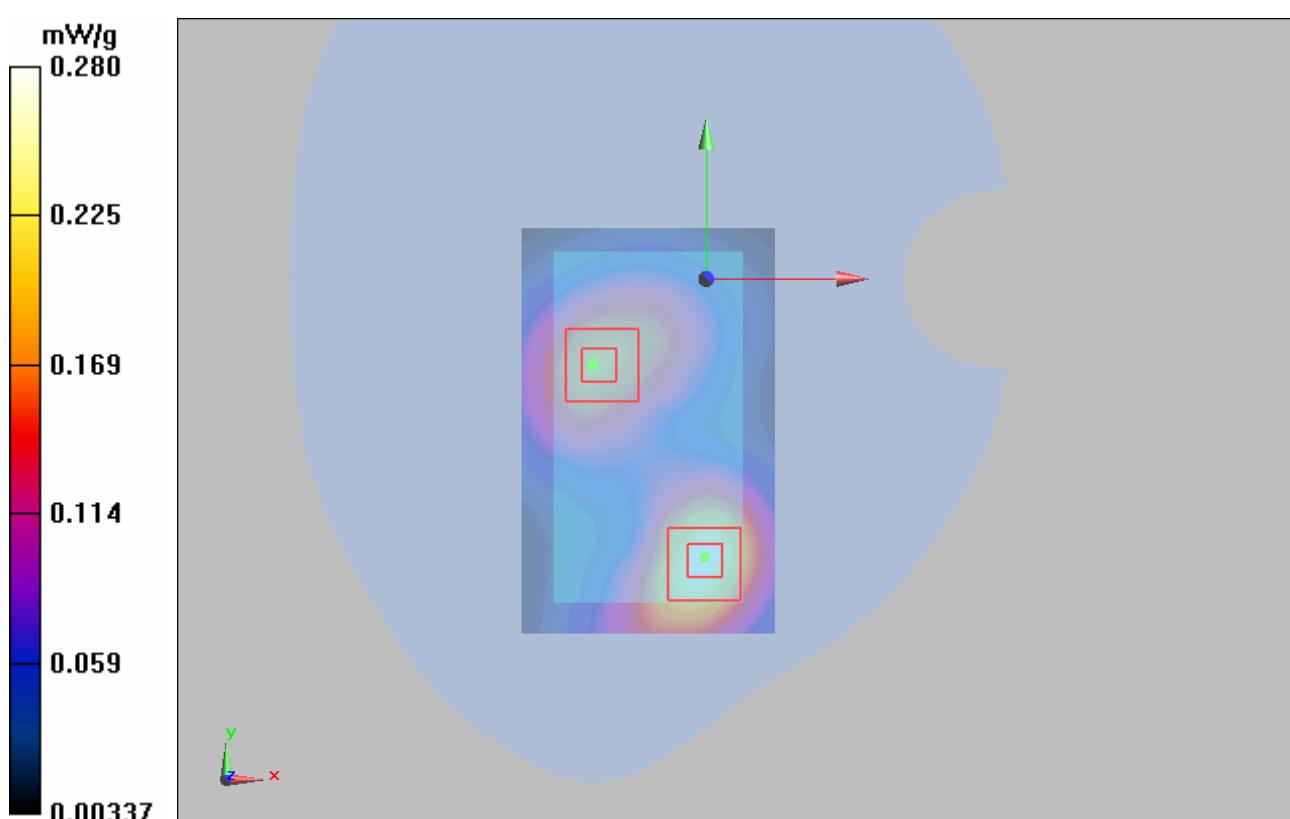


Figure 50 Body, Towards Phantom, WCDMA Band II Channel 9400

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0908

Page 97 of 185

### **WCDMA Band II with Earphone Towards Ground Low**

Date/Time: 6/25/2010 10:57:12 PM

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 53.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.6, 7.6, 7.6); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Ground Low/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.289 mW/g

**Towards Ground Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.87 V/m; Power Drift = 0.190 dB

Peak SAR (extrapolated) = 0.429 W/kg

**SAR(1 g) = 0.263 mW/g; SAR(10 g) = 0.156 mW/g**

Maximum value of SAR (measured) = 0.287 mW/g

**Towards Ground Low/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.87 V/m; Power Drift = 0.190 dB

Peak SAR (extrapolated) = 0.263 W/kg

**SAR(1 g) = 0.175 mW/g; SAR(10 g) = 0.112 mW/g**

Maximum value of SAR (measured) = 0.189 mW/g

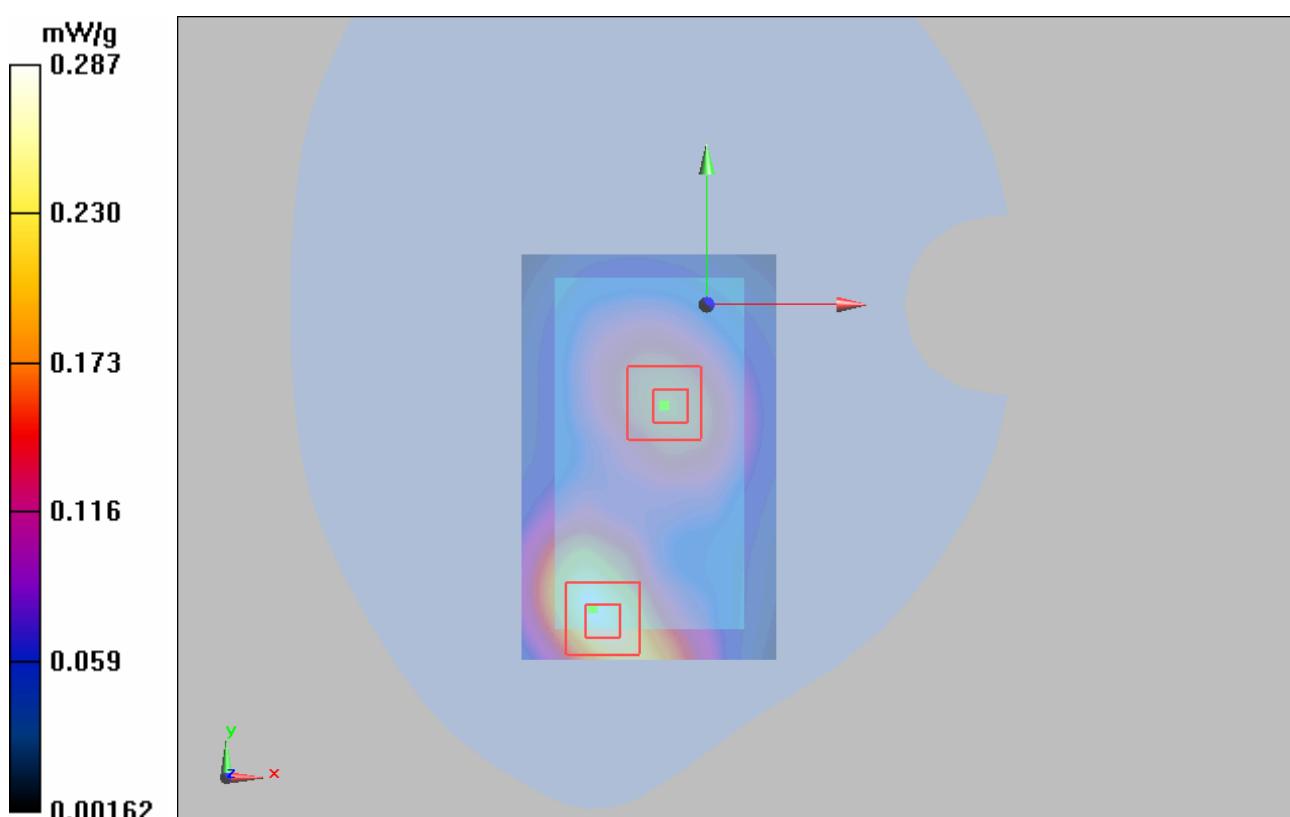


Figure 51 Body with Earphone, Towards Ground, WCDMA Band II Channel 9262

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 98 of 185

## WCDMA Band II HSDPA Towards Ground Low

Date/Time: 6/25/2010 2:45:13 PM

Communication System: WCDMA Band II+HSDPA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 53.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.6, 7.6, 7.6); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Ground Low/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.360 mW/g

**Towards Ground Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.58 V/m; Power Drift = 0.069 dB

Peak SAR (extrapolated) = 0.512 W/kg

**SAR(1 g) = 0.314 mW/g; SAR(10 g) = 0.184 mW/g**

Maximum value of SAR (measured) = 0.342 mW/g

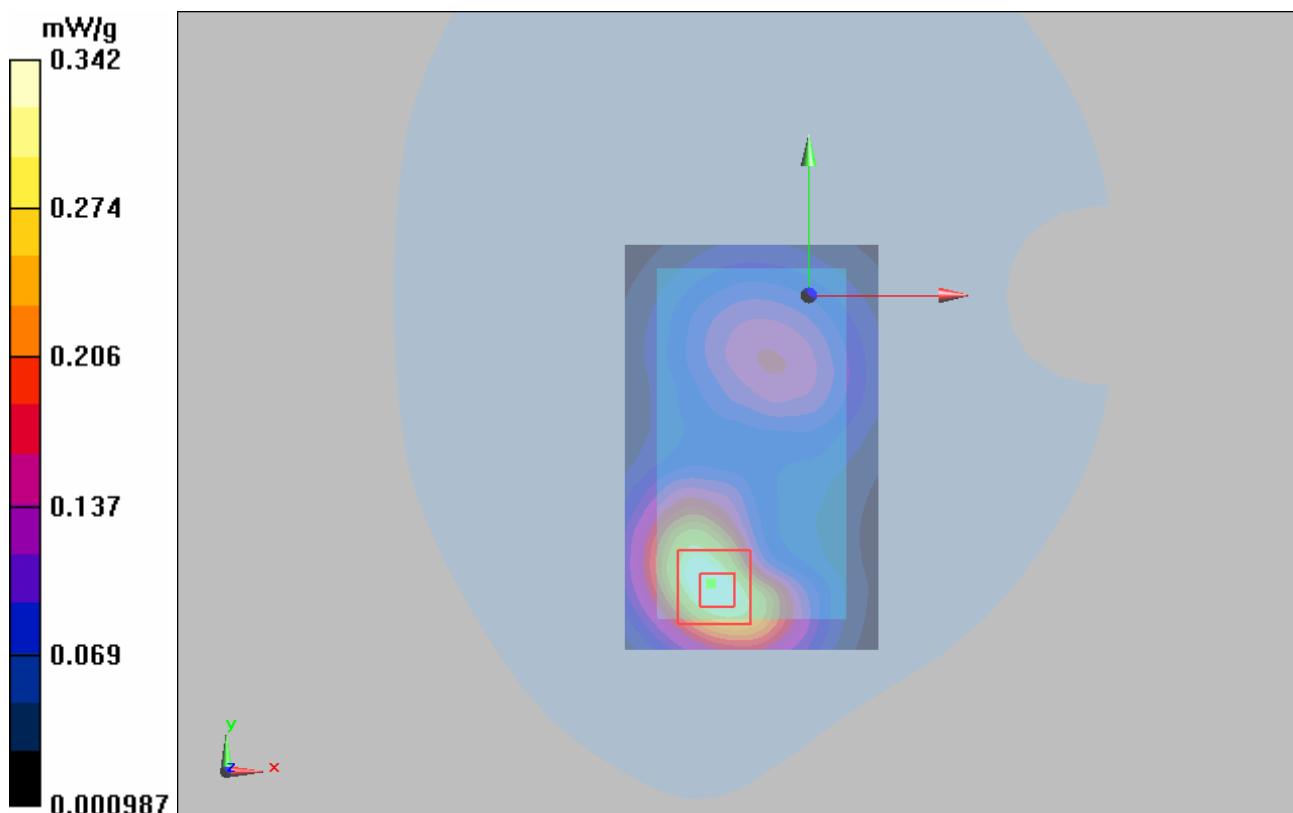


Figure 52 Body, Towards Ground, WCDMA Band II HSDPA Channel 9262

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 99 of 185

## WCDMA Band II HSUPA Towards Ground Low

Date/Time: 6/25/2010 1:33:29 PM

Communication System: WCDMA Band II+HSUPA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 53.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.6, 7.6, 7.6); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Ground Low/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.313 mW/g

**Towards Ground Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.17 V/m; Power Drift = -0.068 dB

Peak SAR (extrapolated) = 0.456 W/kg

**SAR(1 g) = 0.278 mW/g; SAR(10 g) = 0.159 mW/g**

Maximum value of SAR (measured) = 0.304 mW/g

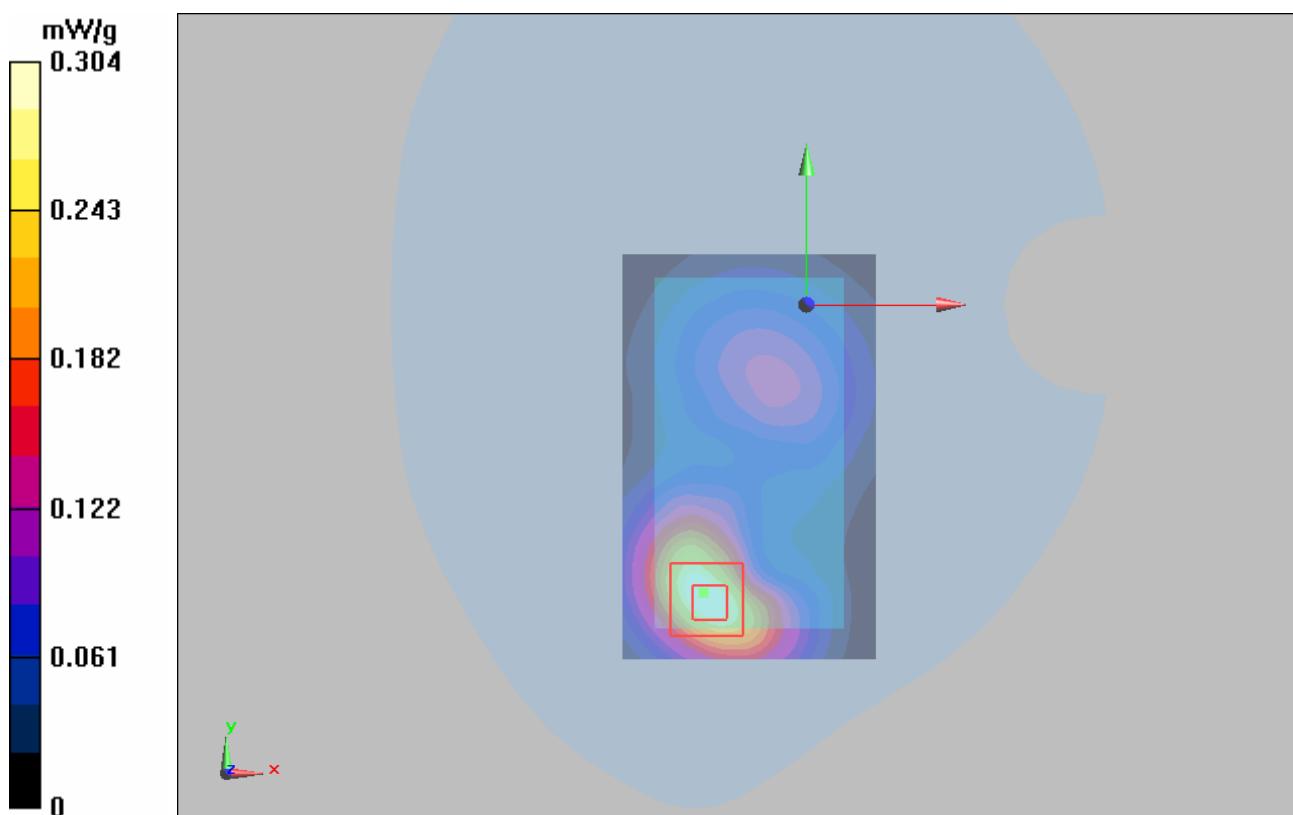


Figure 53 Body, Towards Ground, WCDMA Band II HSUPA Channel 9262

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0908

Page 100 of 185

**WCDMA Band V Left Cheek High**

Date/Time: 6/25/2010 7:14:30 AM

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 847$  MHz;  $\sigma = 0.943$  mho/m;  $\epsilon_r = 41.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(9.34, 9.34, 9.34); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Cheek High/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.690 mW/g


**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.84 V/m; Power Drift = 0.021 dB

Peak SAR (extrapolated) = 0.834 W/kg

**SAR(1 g) = 0.644 mW/g; SAR(10 g) = 0.462 mW/g**

Maximum value of SAR (measured) = 0.681 mW/g

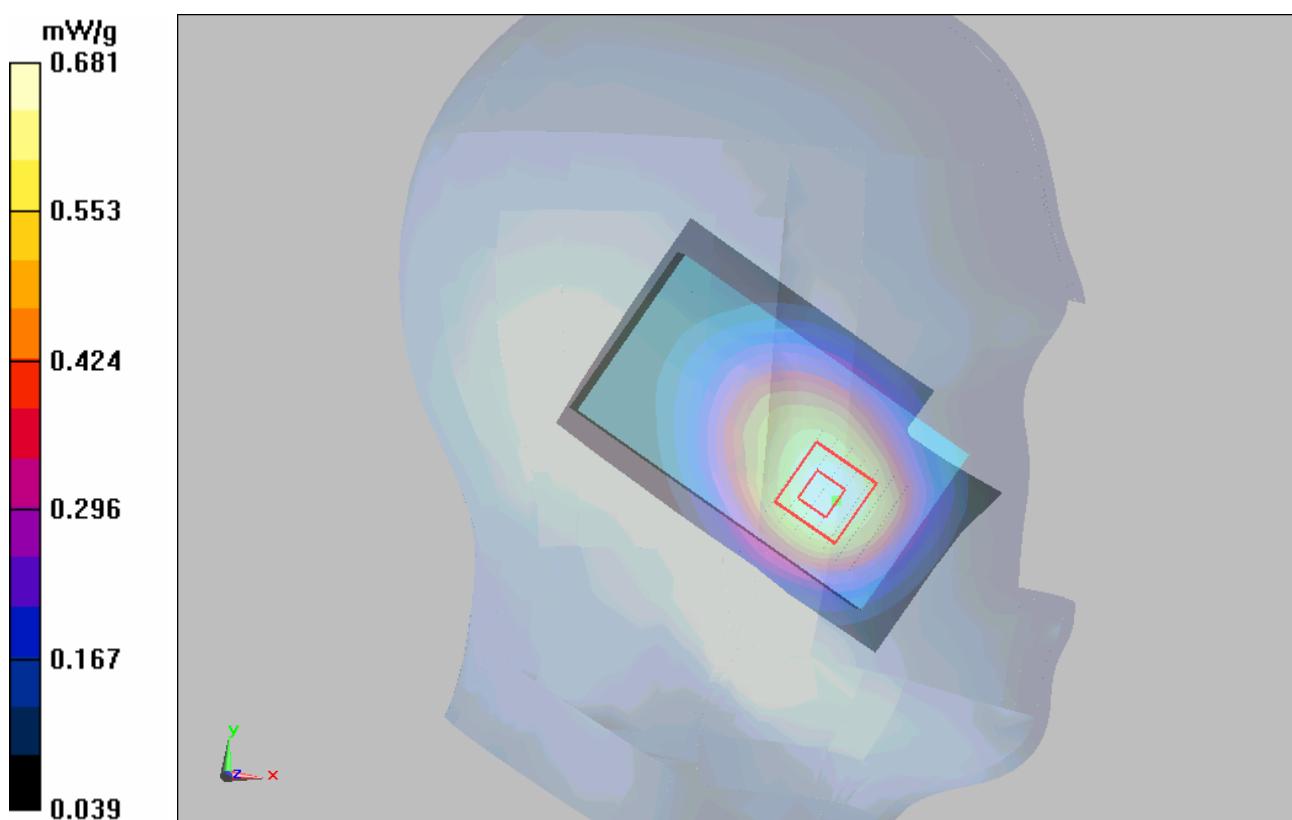

**TA Technology (Shanghai) Co., Ltd.  
Test Report**

Report No. RZA2010-0908

Page 101 of 185

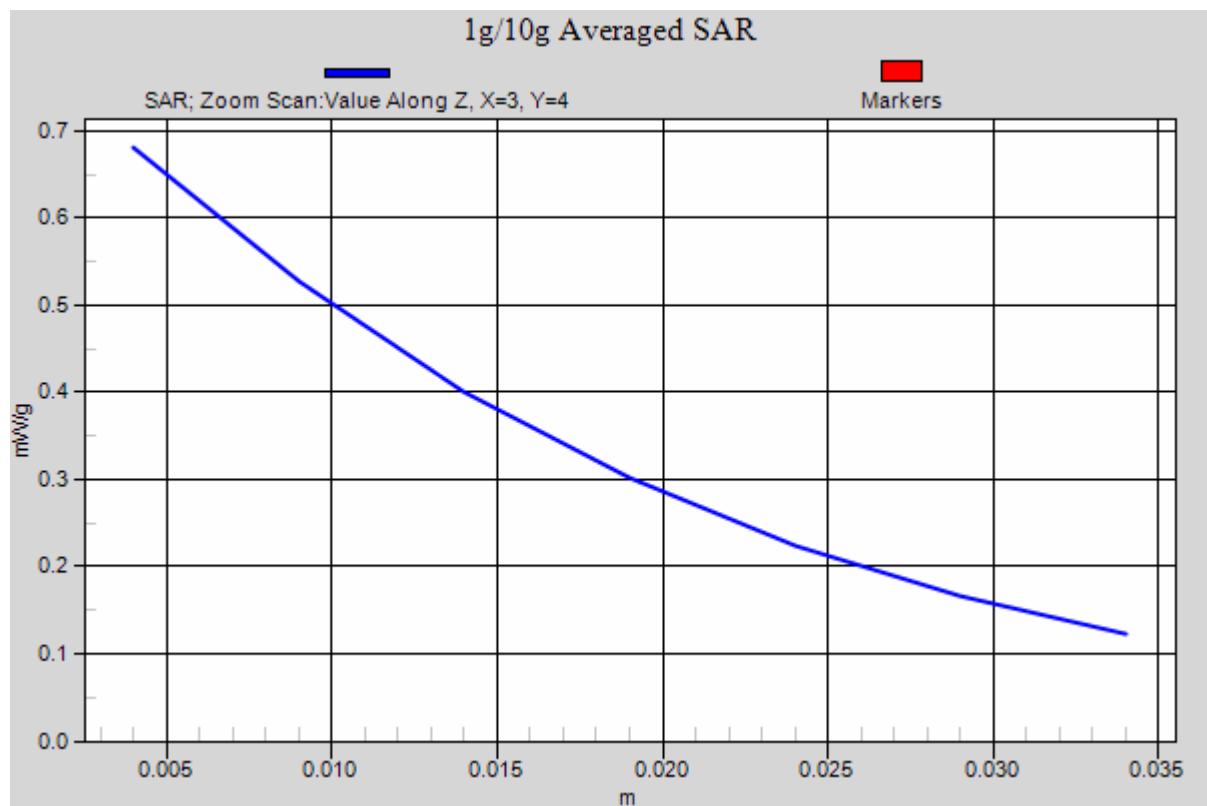


Figure 54 Left Hand Touch Cheek WCDMA Band V Channel 4233

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0908

Page 102 of 185

### **WCDMA Band V Left Cheek Middle**

Date/Time: 6/25/2010 5:30:34 AM

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.933$  mho/m;  $\epsilon_r = 42$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(9.34, 9.34, 9.34); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Cheek Middle/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.682 mW/g

**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.1 V/m; Power Drift = -0.000 dB

Peak SAR (extrapolated) = 0.832 W/kg

**SAR(1 g) = 0.633 mW/g; SAR(10 g) = 0.455 mW/g**

Maximum value of SAR (measured) = 0.670 mW/g

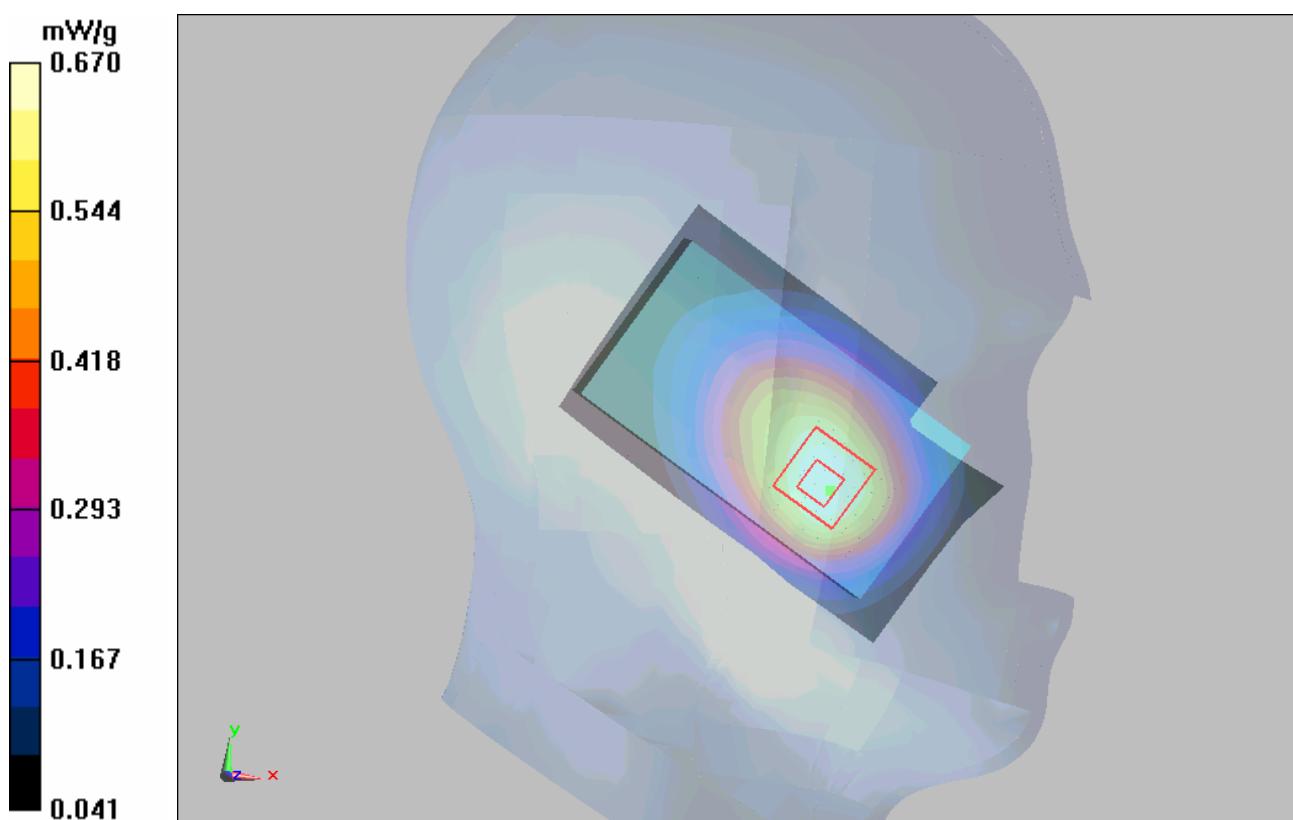


Figure 55 Left Hand Touch Cheek WCDMA Band V Channel 4183

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0908

Page 103 of 185

**WCDMA Band V Left Cheek Low**

Date/Time: 6/25/2010 7:35:16 AM

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 0.926$  mho/m;  $\epsilon_r = 42.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(9.34, 9.34, 9.34); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Cheek Low/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.493 mW/g

**Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.41 V/m; Power Drift = 0.036 dB

Peak SAR (extrapolated) = 0.580 W/kg

**SAR(1 g) = 0.452 mW/g; SAR(10 g) = 0.329 mW/g**

Maximum value of SAR (measured) = 0.476 mW/g

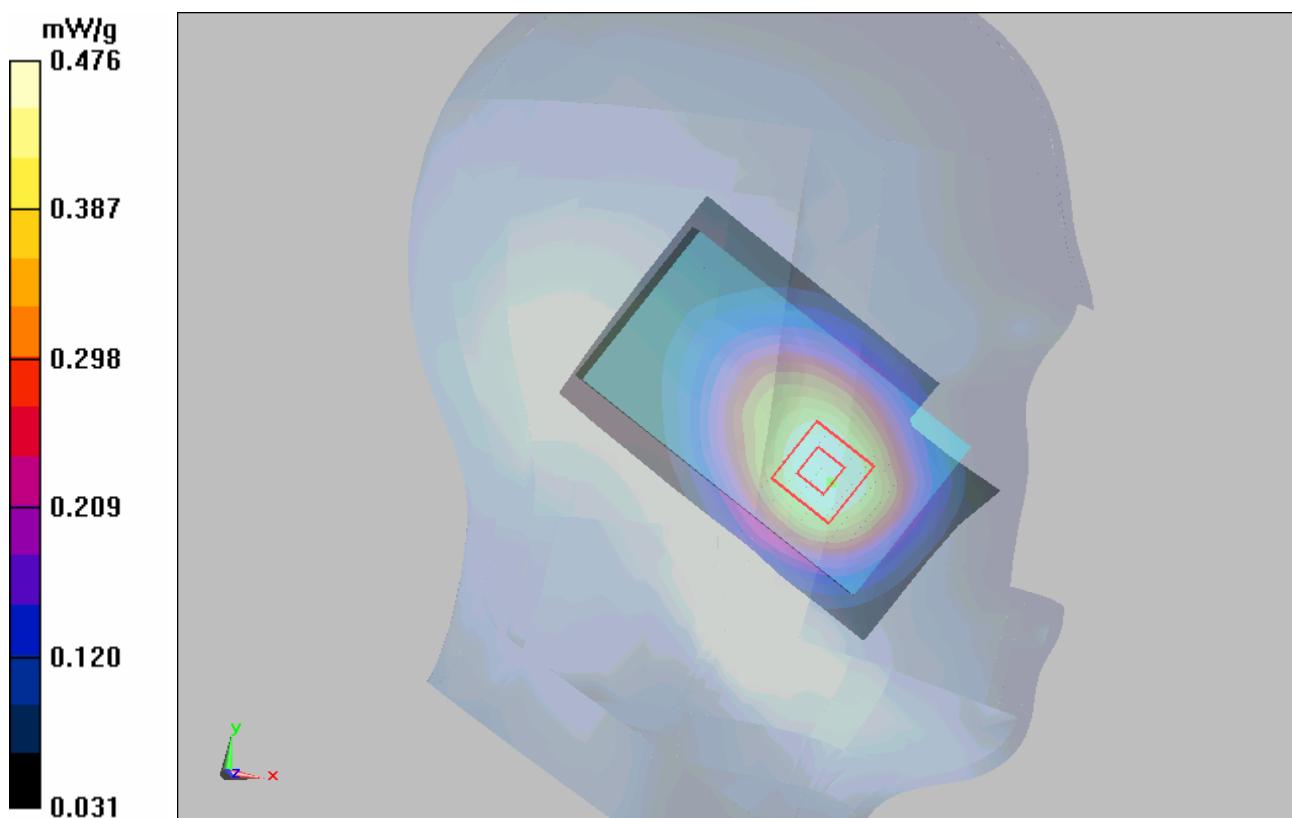


Figure 56 Left Hand Touch Cheek WCDMA Band V Channel 4132

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 104 of 185

## WCDMA Band V Left Tilt Middle

Date/Time: 6/25/2010 5:50:53 AM

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.933$  mho/m;  $\epsilon_r = 42$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(9.34, 9.34, 9.34); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Tilt Middle/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.325 mW/g

**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.9 V/m; Power Drift = 0.078 dB

Peak SAR (extrapolated) = 0.398 W/kg

**SAR(1 g) = 0.313 mW/g; SAR(10 g) = 0.234 mW/g**

Maximum value of SAR (measured) = 0.330 mW/g

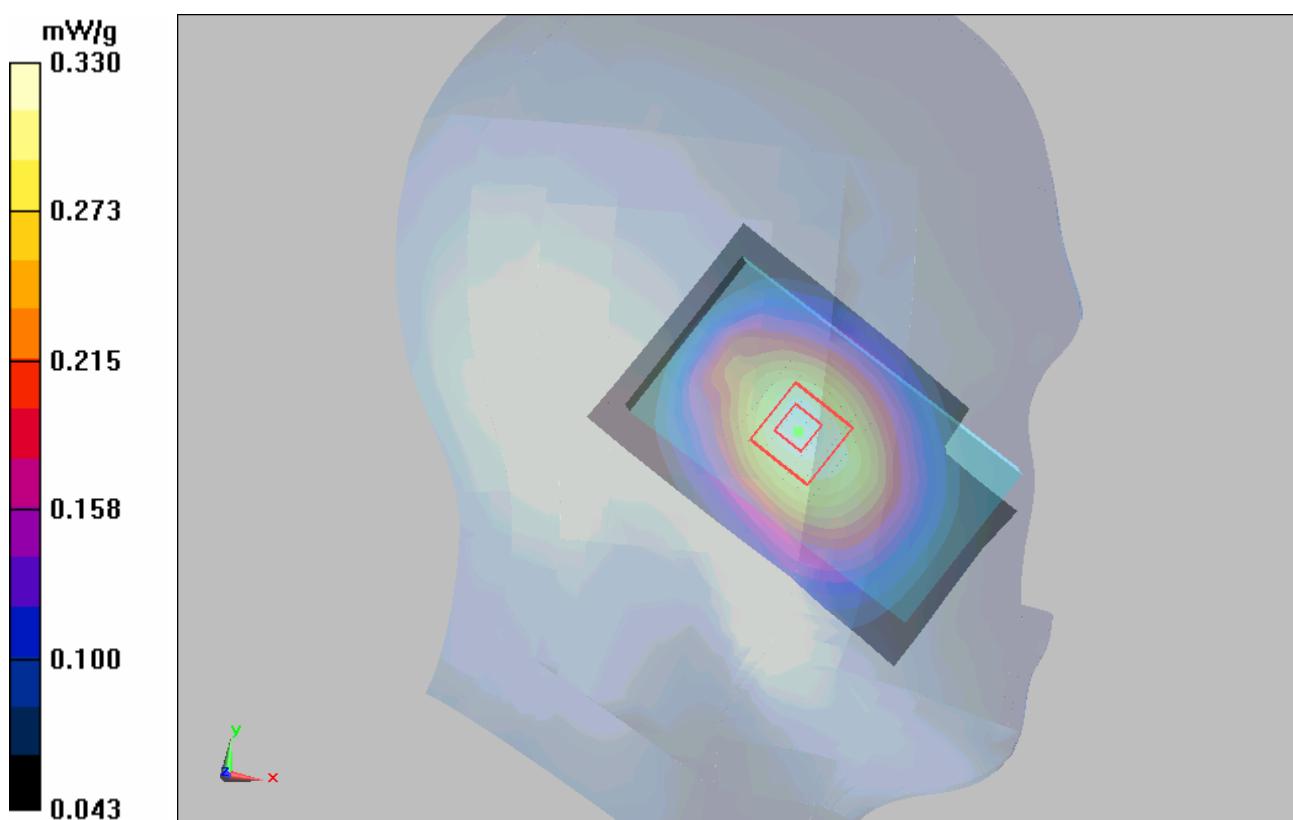


Figure 57 Left Hand Tilt 15° WCDMA Band V Channel 4183

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0908

Page 105 of 185

### WCDMA Band V Right Cheek Middle

Date/Time: 6/25/2010 6:19:02 AM

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.933$  mho/m;  $\epsilon_r = 42$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(9.34, 9.34, 9.34); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Cheek Middle/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.595 mW/g

**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.54 V/m; Power Drift = -0.133 dB

Peak SAR (extrapolated) = 0.745 W/kg

**SAR(1 g) = 0.555 mW/g; SAR(10 g) = 0.412 mW/g**

Maximum value of SAR (measured) = 0.584 mW/g

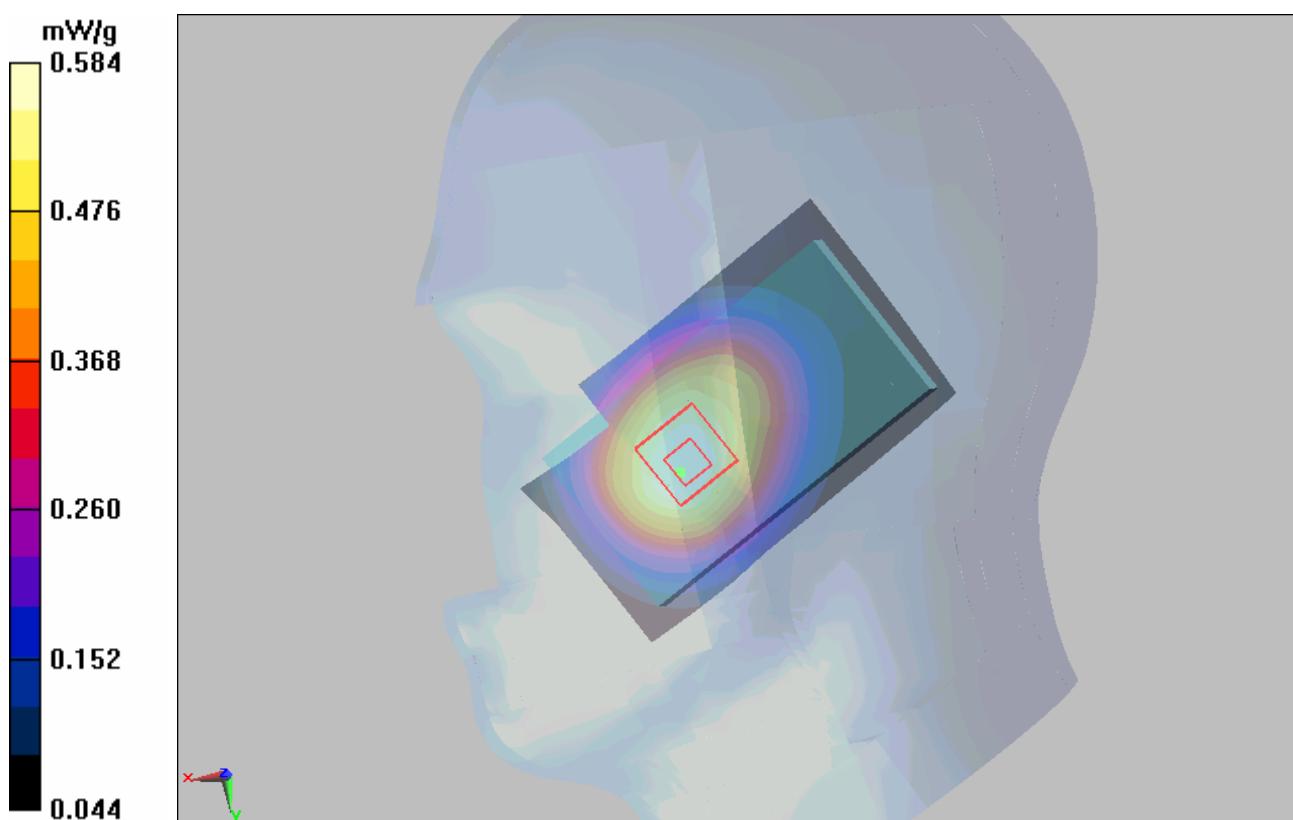


Figure 58 Right Hand Touch Cheek WCDMA Band V Channel 4183

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0908

Page 106 of 185

### WCDMA Band V Right Tilt Middle

Date/Time: 6/25/2010 6:39:59 AM

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.933$  mho/m;  $\epsilon_r = 42$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(9.34, 9.34, 9.34); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Tilt Middle/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.291 mW/g

**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.4 V/m; Power Drift = 0.095 dB

Peak SAR (extrapolated) = 0.358 W/kg

**SAR(1 g) = 0.280 mW/g; SAR(10 g) = 0.209 mW/g**

Maximum value of SAR (measured) = 0.295 mW/g

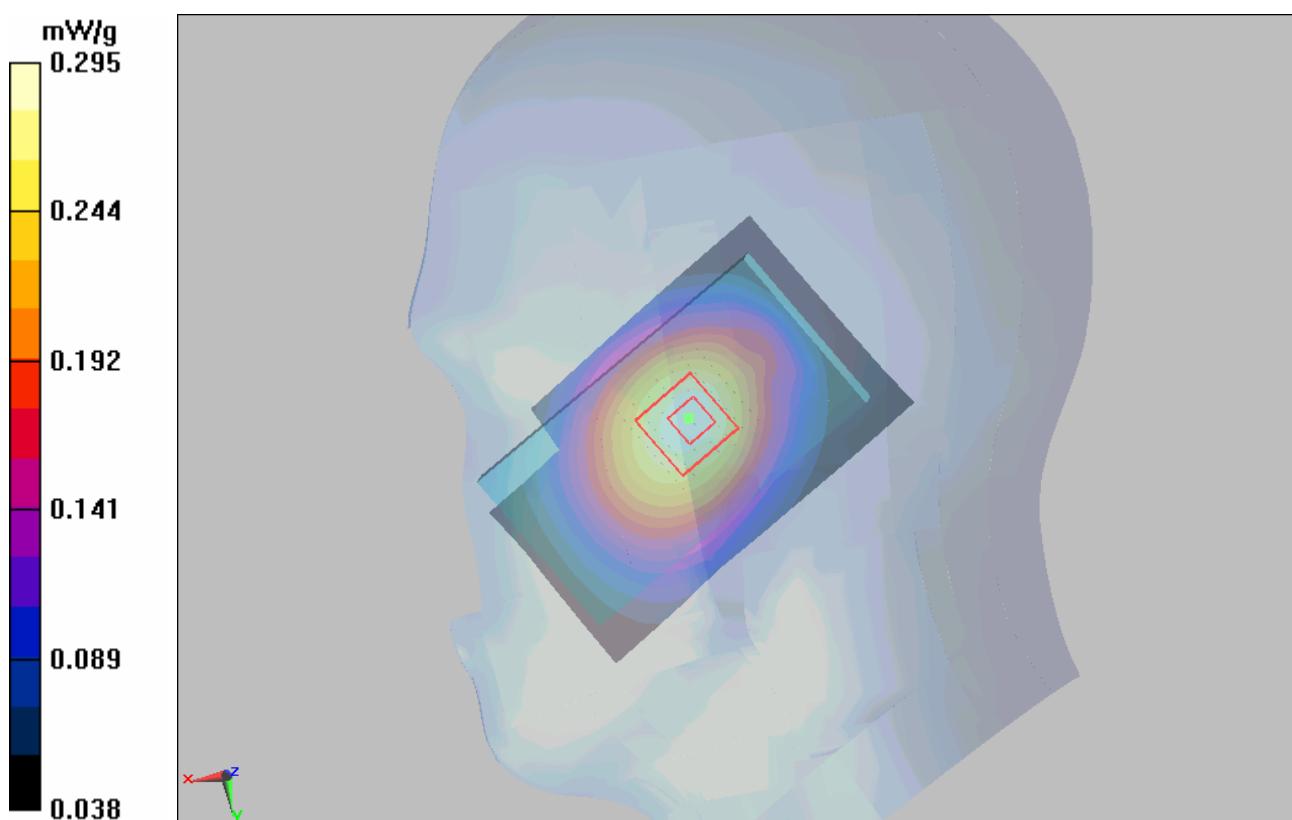


Figure 59 Right Hand Tilt 15° WCDMA Band V Channel 4183

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0908

Page 107 of 185

## WCDMA Band V Towards Ground High

Date/Time: 6/26/2010 12:39:49 AM

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 847$  MHz;  $\sigma = 1.02$  mho/m;  $\epsilon_r = 54.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(9.24, 9.24, 9.24); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Ground High/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.499 mW/g

**Towards Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.45 V/m; Power Drift = 0.150 dB

Peak SAR (extrapolated) = 0.646 W/kg

**SAR(1 g) = 0.480 mW/g; SAR(10 g) = 0.343 mW/g**

Maximum value of SAR (measured) = 0.506 mW/g

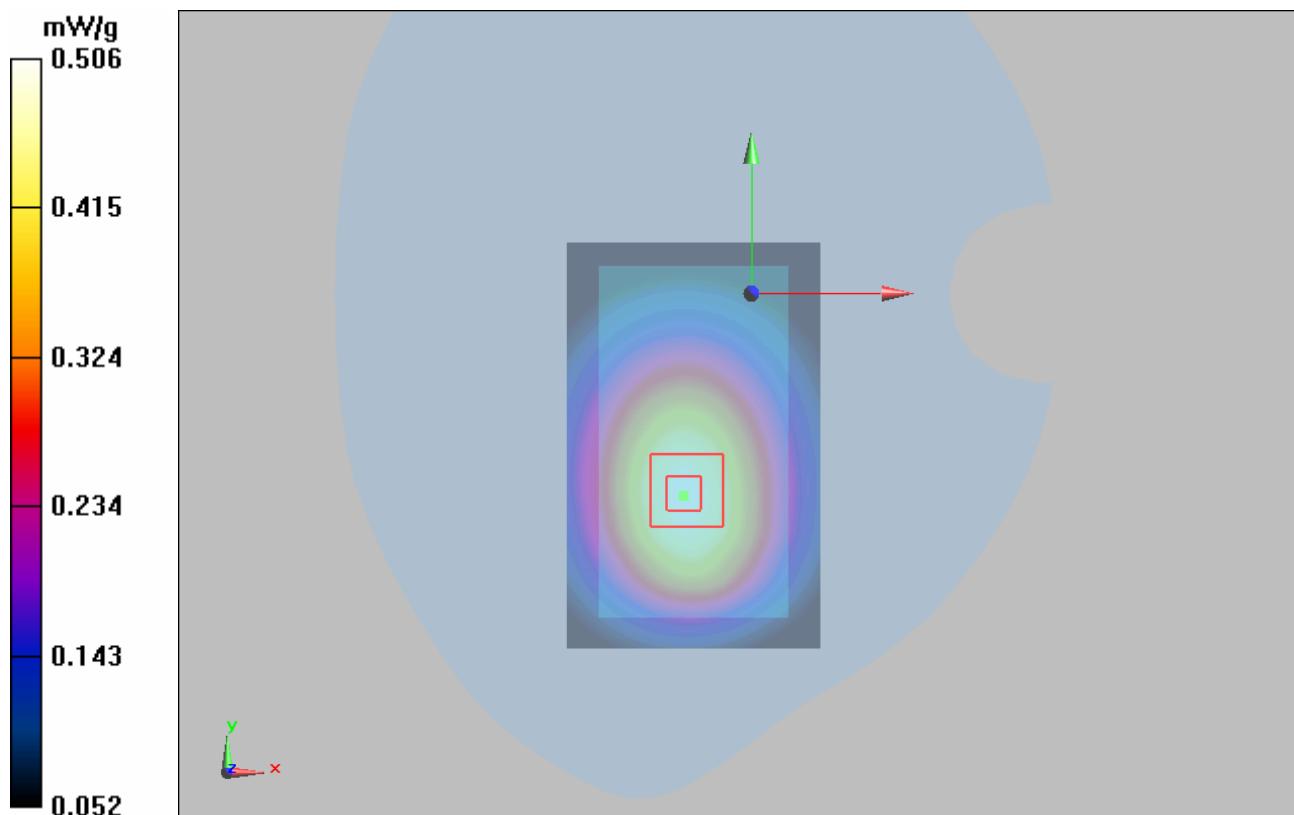


Figure 60 Body, Towards Ground, WCDMA Band V Channel 4233

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0908

Page 108 of 185

### **WCDMA Band V Towards Ground Middle**

Date/Time: 6/25/2010 11:33:12 PM

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1.01$  mho/m;  $\epsilon_r = 54.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(9.24, 9.24, 9.24); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Ground Middle/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.446 mW/g

**Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.13 V/m; Power Drift = 0.047 dB

Peak SAR (extrapolated) = 0.574 W/kg

**SAR(1 g) = 0.424 mW/g; SAR(10 g) = 0.304 mW/g**

Maximum value of SAR (measured) = 0.452 mW/g

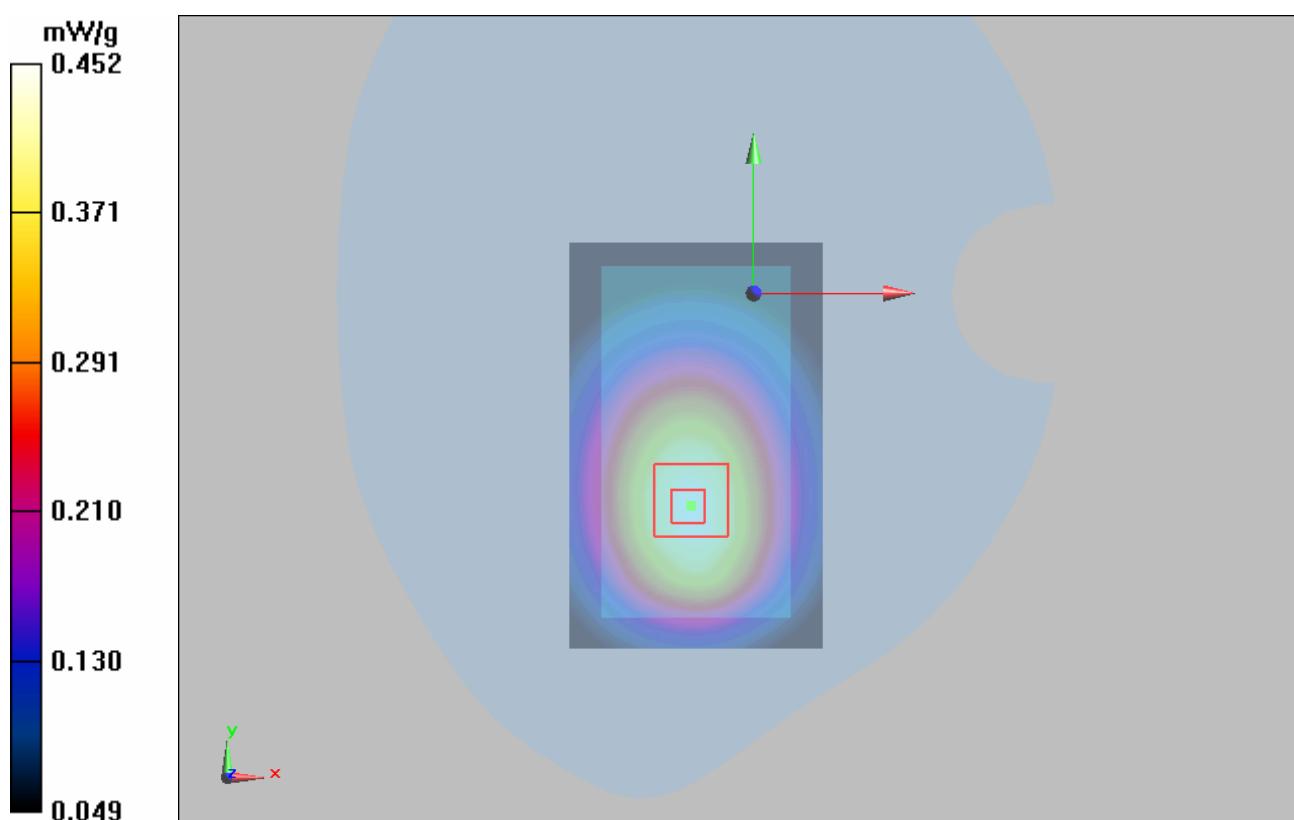


Figure 61 Body, Towards Ground, WCDMA Band V Channel 4183

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0908

Page 109 of 185

### **WCDMA Band V Towards Ground Low**

Date/Time: 6/25/2010 11:54:07 PM

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 0.996$  mho/m;  $\epsilon_r = 54.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(9.24, 9.24, 9.24); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Ground Low/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.353 mW/g

**Towards Ground Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.1 V/m; Power Drift = -0.163 dB

Peak SAR (extrapolated) = 0.445 W/kg

**SAR(1 g) = 0.329 mW/g; SAR(10 g) = 0.235 mW/g**

Maximum value of SAR (measured) = 0.349 mW/g

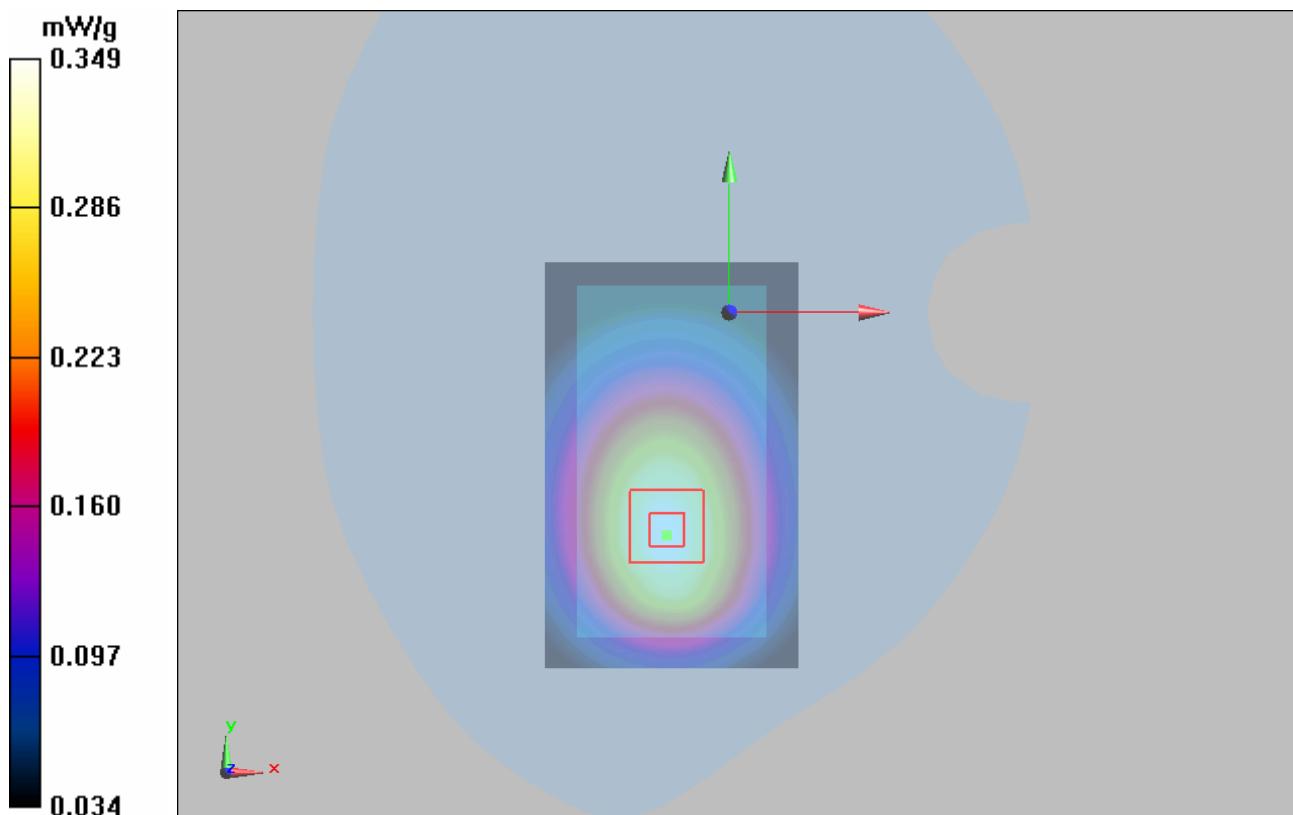


Figure 62 Body, Towards Ground, WCDMA Band V Channel 4132

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 110 of 185

## WCDMA Band V Towards Phantom Middle

Date/Time: 6/26/2010 1:38:24 AM

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1.01$  mho/m;  $\epsilon_r = 54.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(9.24, 9.24, 9.24); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Phantom Middle/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.382 mW/g

**Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.01 V/m; Power Drift = 0.100 dB

Peak SAR (extrapolated) = 0.473 W/kg

**SAR(1 g) = 0.358 mW/g; SAR(10 g) = 0.260 mW/g**

Maximum value of SAR (measured) = 0.376 mW/g

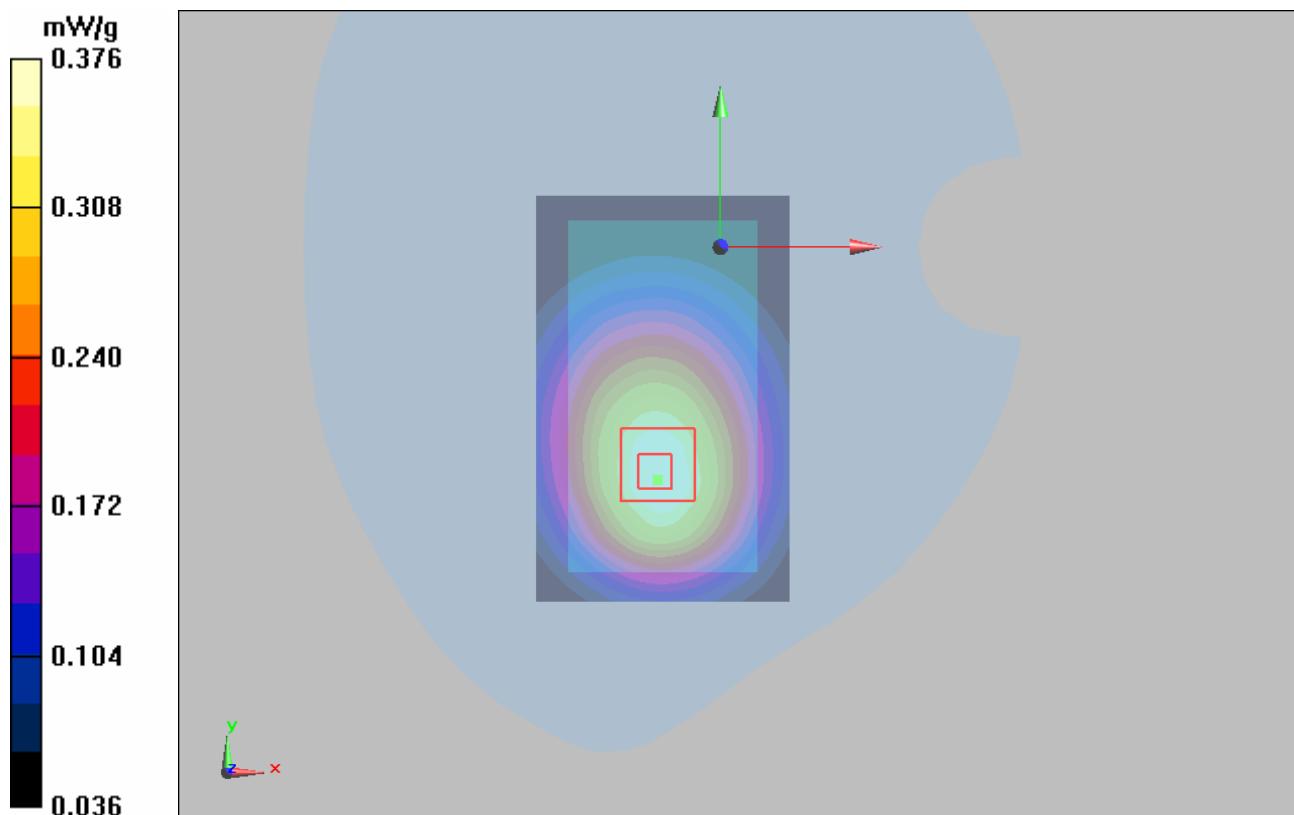


Figure 63 Body, Towards Phantom, WCDMA Band V Channel 4183

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0908

Page 111 of 185

### **WCDMA Band V with Earphone Towards Ground High**

Date/Time: 6/26/2010 1:16:21 AM

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 847$  MHz;  $\sigma = 1.02$  mho/m;  $\epsilon_r = 54.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(9.24, 9.24, 9.24); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Ground High/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.359 mW/g

**Towards Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.65 V/m; Power Drift = 0.198 dB

Peak SAR (extrapolated) = 0.465 W/kg

**SAR(1 g) = 0.342 mW/g; SAR(10 g) = 0.245 mW/g**

Maximum value of SAR (measured) = 0.363 mW/g

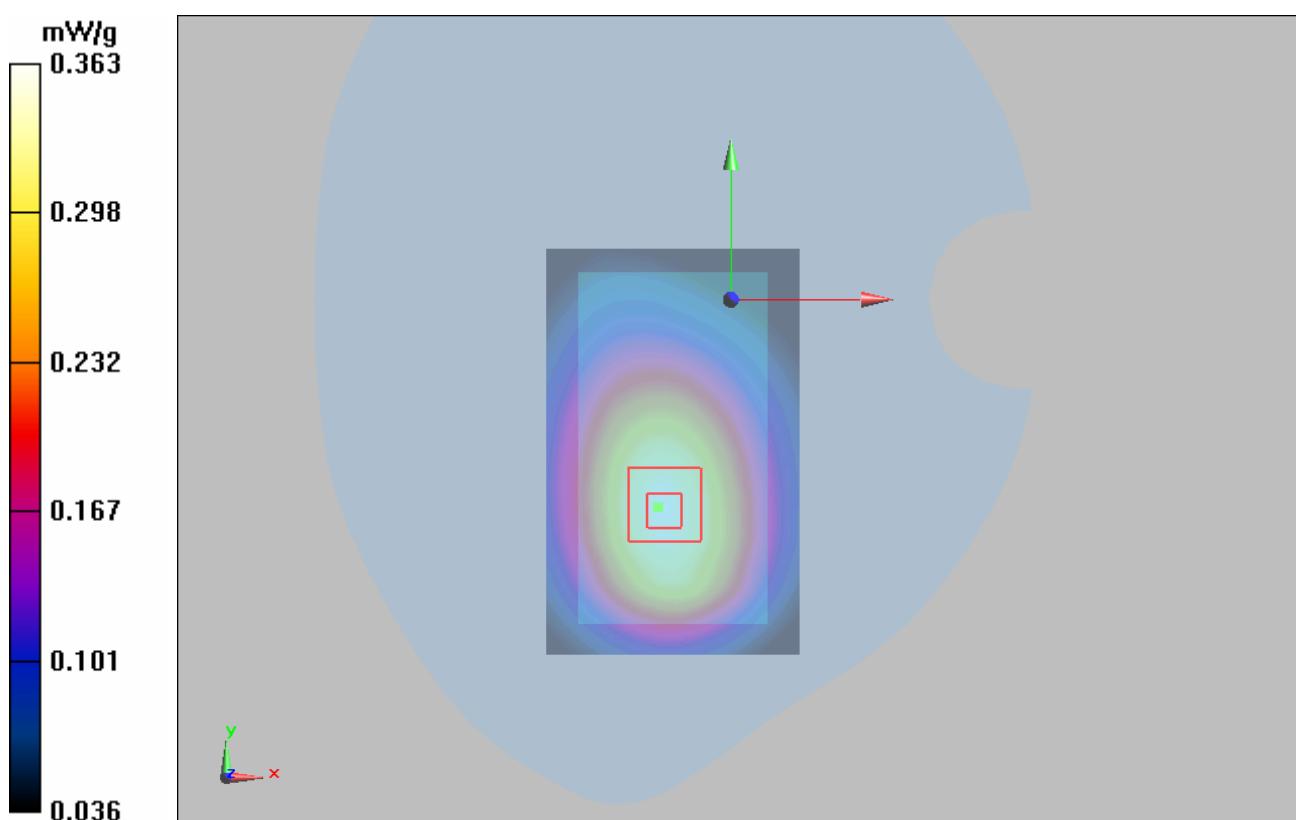


Figure 64 Body with Earphone, Towards Ground, WCDMA Band V Channel 4233

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0908

Page 112 of 185

### WCDMA Band V HSDPA Towards Ground High

Date/Time: 6/26/2010 5:07:18 AM

Communication System: WCDMA Band V+HSDPA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 847$  MHz;  $\sigma = 1.02$  mho/m;  $\epsilon_r = 54.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(9.24, 9.24, 9.24); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Ground High/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.529 mW/g


**Towards Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.45 V/m; Power Drift = -0.138 dB

Peak SAR (extrapolated) = 0.667 W/kg

**SAR(1 g) = 0.487 mW/g; SAR(10 g) = 0.347 mW/g**

Maximum value of SAR (measured) = 0.521 mW/g

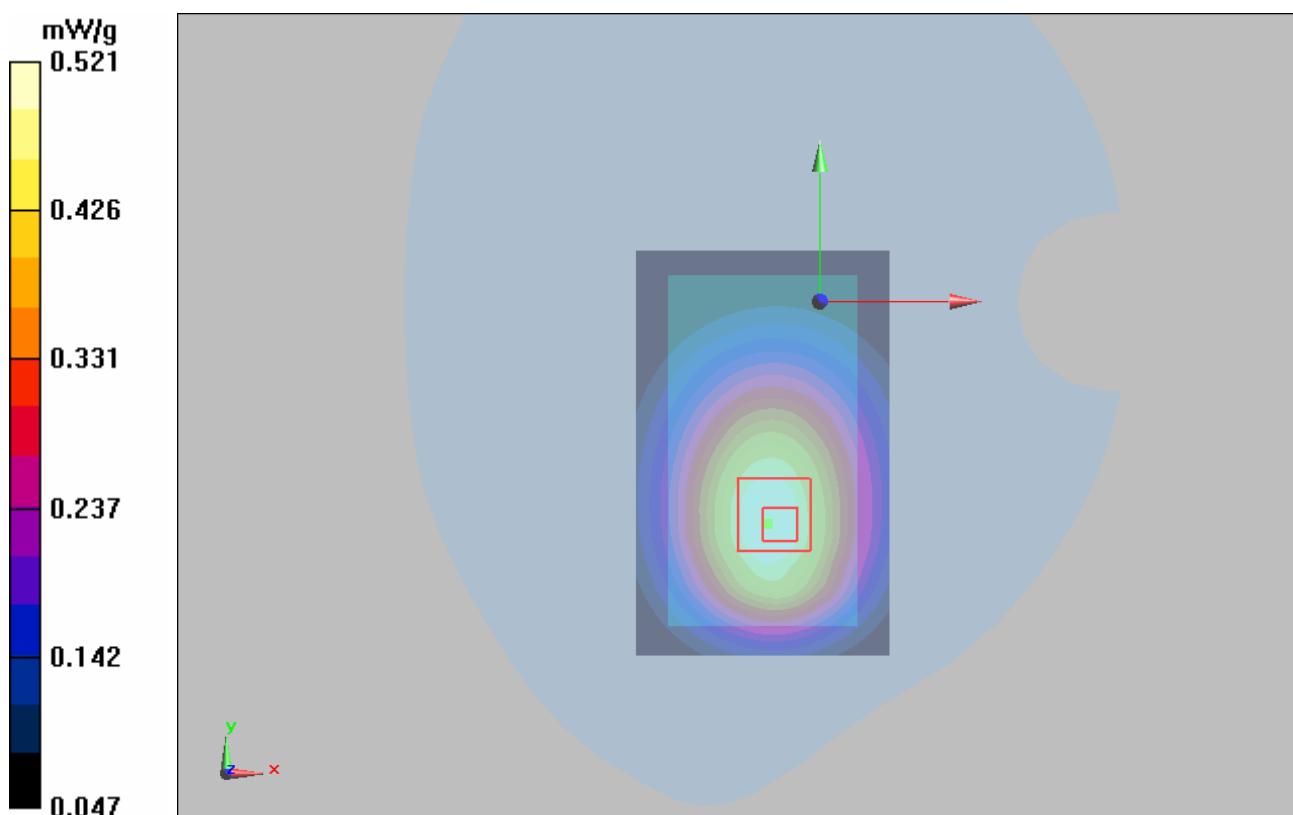

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0908

Page 113 of 185

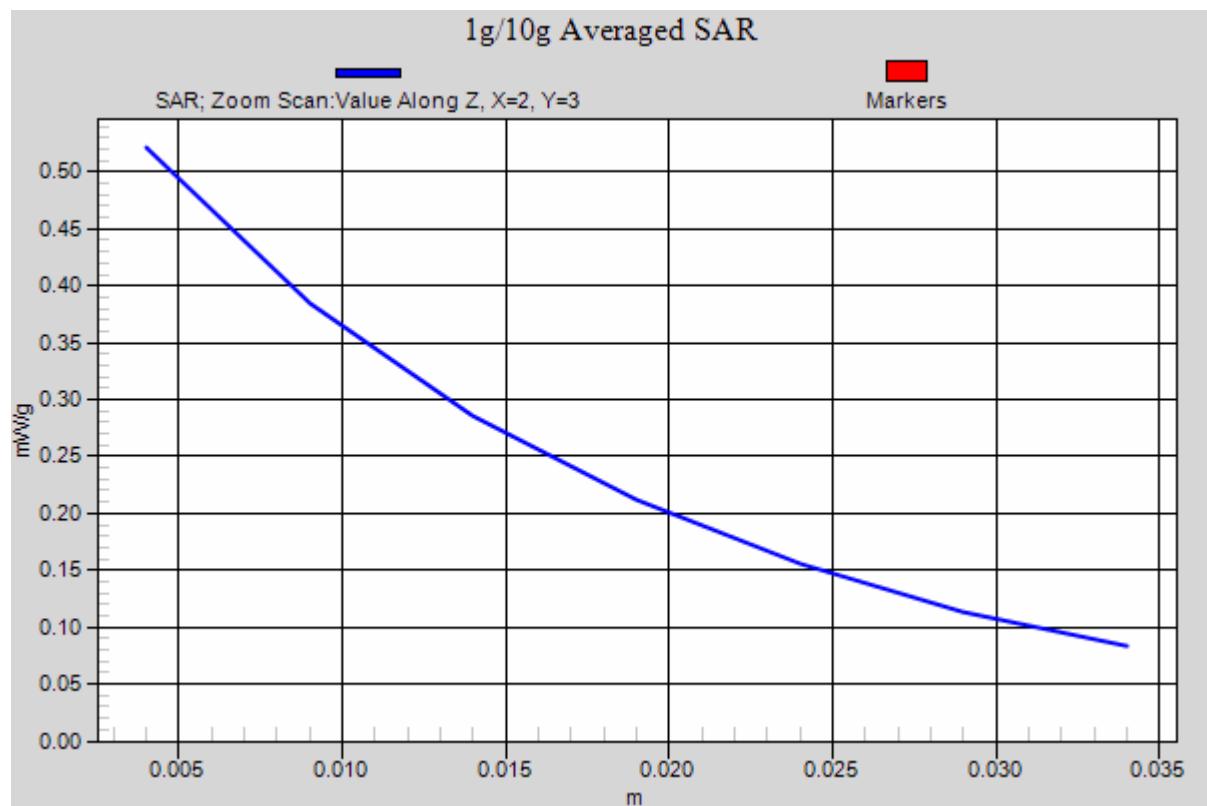


Figure 65 Body, Towards Ground, WCDMA Band V HSDPA Channel 4233

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 114 of 185

## WCDMA Band V HSUPA Towards Ground High

Date/Time: 6/25/2010 11:21:40 PM

Communication System: WCDMA Band V+HSUPA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 847$  MHz;  $\sigma = 1.02$  mho/m;  $\epsilon_r = 54.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(9.24, 9.24, 9.24); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Ground High/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.489 mW/g

**Towards Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.25 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 0.627 W/kg

**SAR(1 g) = 0.460 mW/g; SAR(10 g) = 0.327 mW/g**

Maximum value of SAR (measured) = 0.490 mW/g

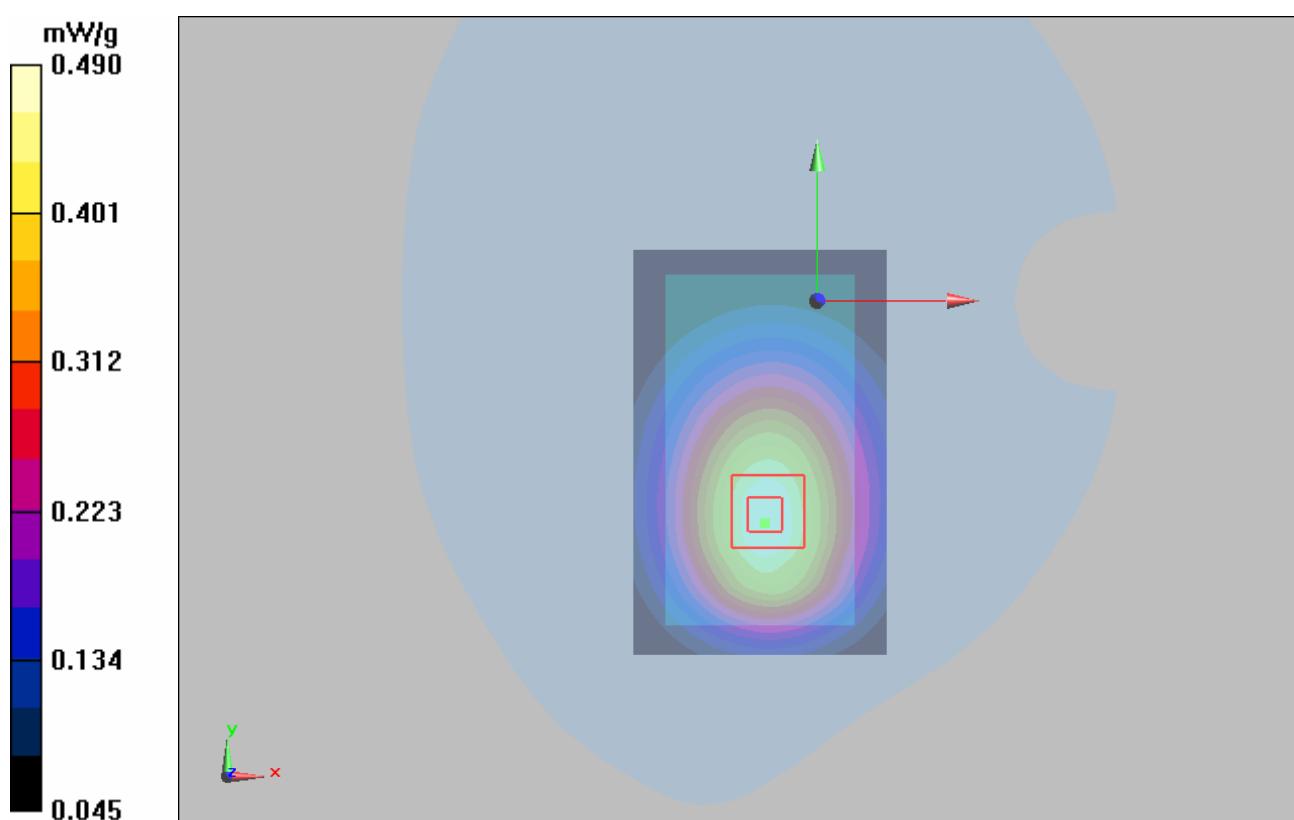


Figure 66 Body, Towards Ground, WCDMA Band V HSUPA Channel 4233

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0908

Page 115 of 185

### 802.11b Left Cheek Middle

Date/Time: 6/30/2010 12:42:59 AM

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.77$  mho/m;  $\epsilon_r = 38.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.22, 7.22, 7.22); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Cheek Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.256 mW/g

**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.7 V/m; Power Drift = 0.159 dB

Peak SAR (extrapolated) = 0.557 W/kg

**SAR(1 g) = 0.253 mW/g; SAR(10 g) = 0.126 mW/g**

Maximum value of SAR (measured) = 0.281 mW/g

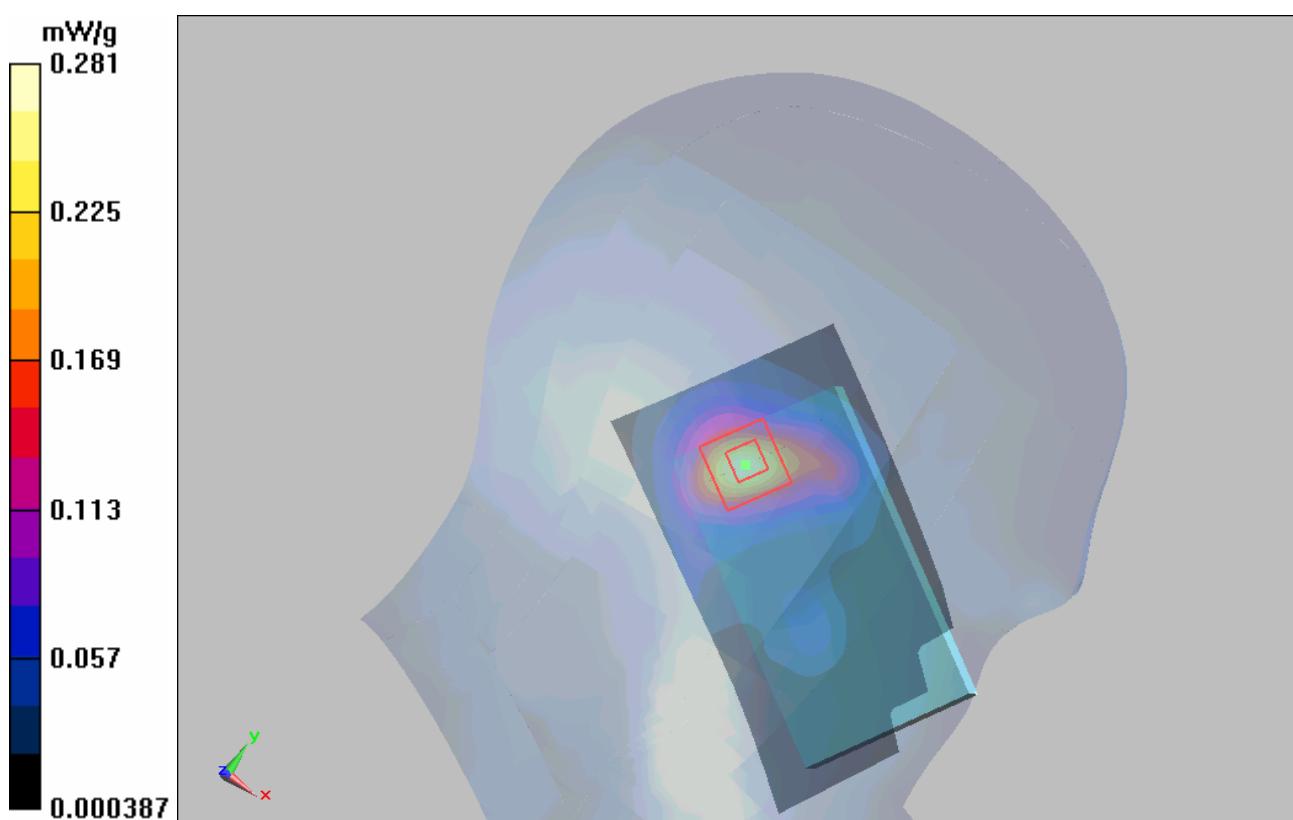


Figure 67 Left Hand Touch Cheek 802.11b Channel 6

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0908

Page 116 of 185

**802.11b Left Tilt High**

Date/Time: 6/30/2010 2:23:39 AM

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.8$  mho/m;  $\epsilon_r = 38.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.22, 7.22, 7.22); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Tilt High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.348 mW/g


**Tilt High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.9 V/m; Power Drift = 0.045 dB

Peak SAR (extrapolated) = 0.723 W/kg

**SAR(1 g) = 0.324 mW/g; SAR(10 g) = 0.157 mW/g**

Maximum value of SAR (measured) = 0.352 mW/g

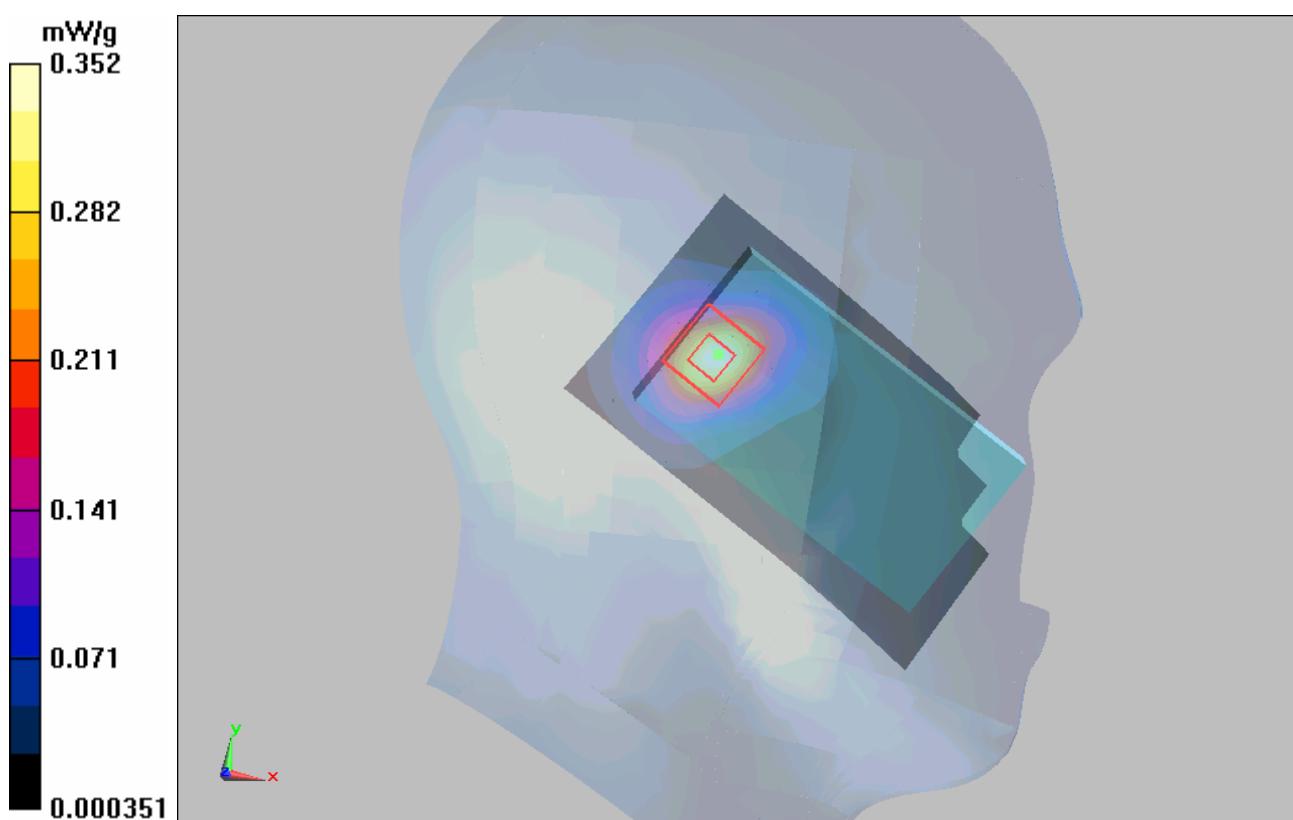

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0908

Page 117 of 185

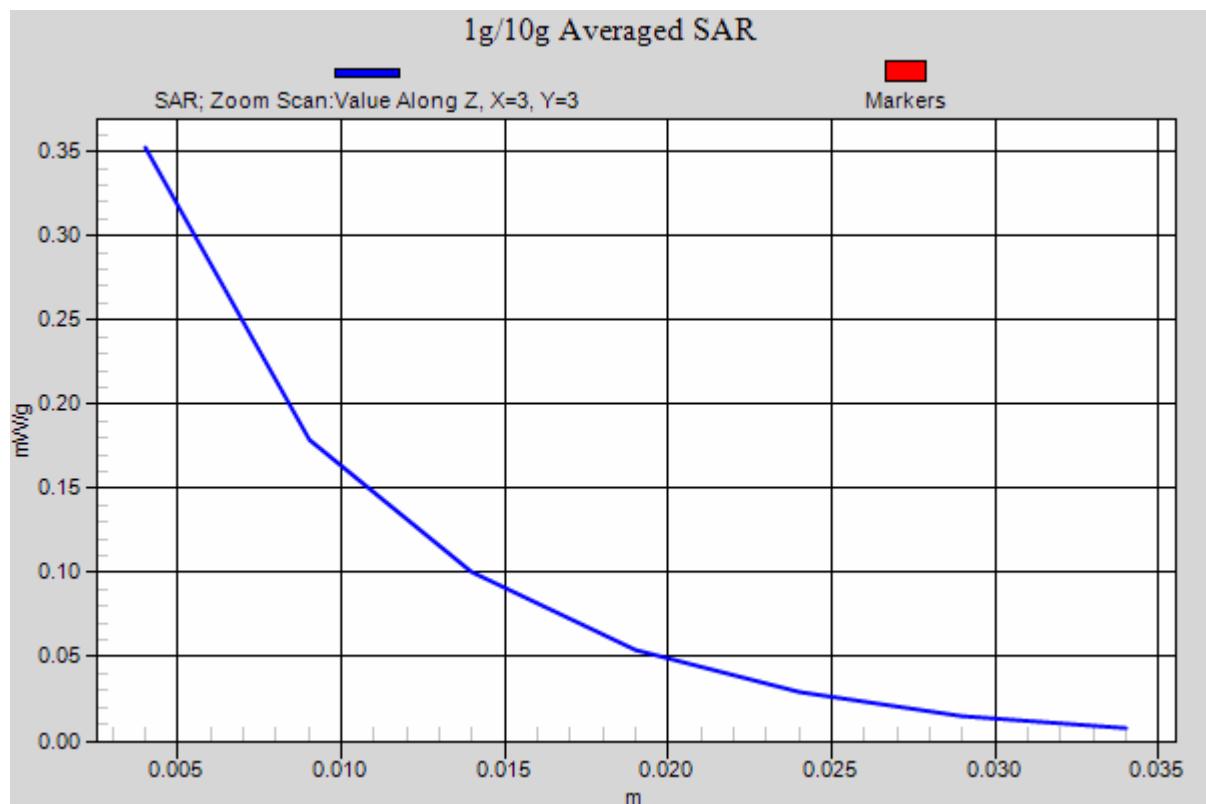


Figure 68 Left Hand Tilt 15° 802.11b Channel 11

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0908

Page 118 of 185

**802.11b Left Tilt Middle**

Date/Time: 6/30/2010 1:04:25 AM

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.77$  mho/m;  $\epsilon_r = 38.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.22, 7.22, 7.22); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Tilt Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.334 mW/g

**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 0.702 W/kg

**SAR(1 g) = 0.315 mW/g; SAR(10 g) = 0.151 mW/g**

Maximum value of SAR (measured) = 0.348 mW/g

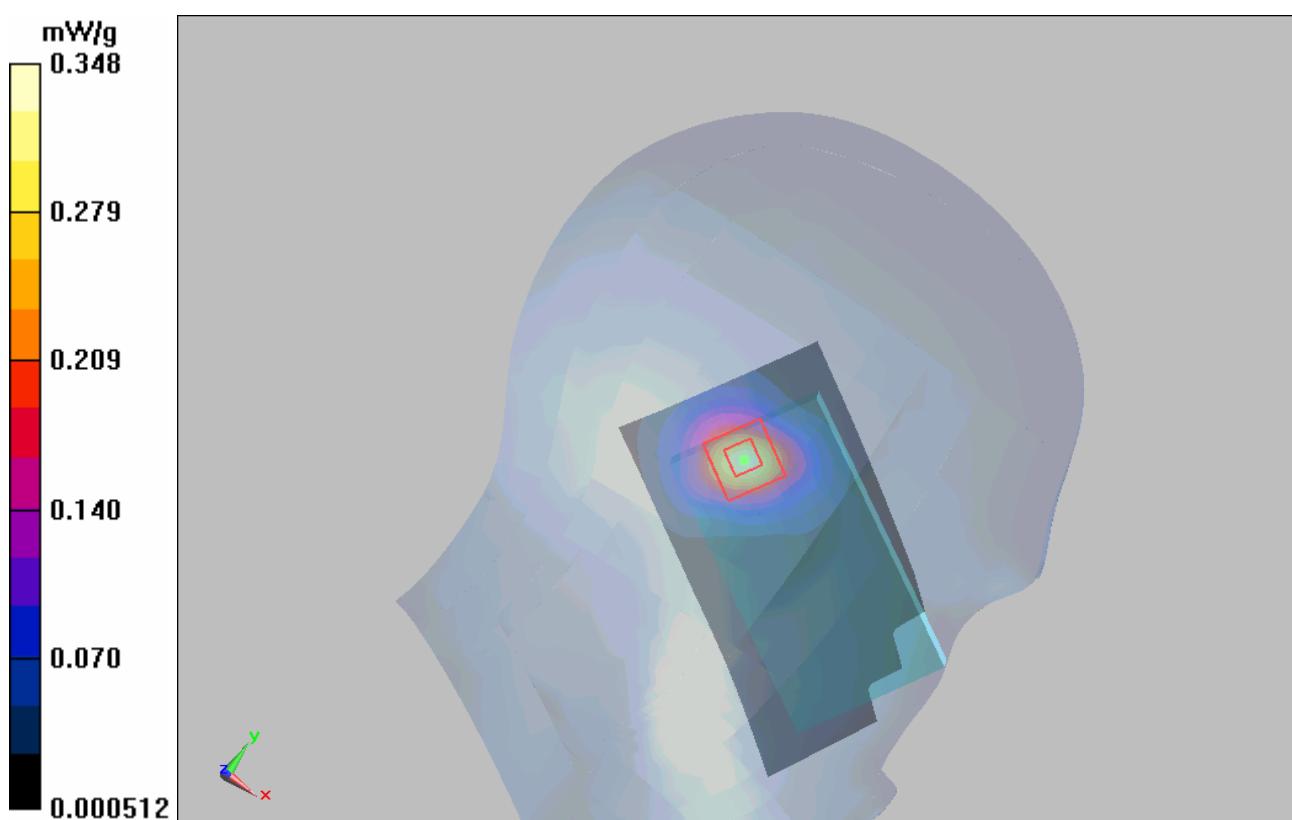


Figure 69 Left Hand Tilt 15° 802.11b Channel 6

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0908

Page 119 of 185

**802.11b Left Tilt Low**

Date/Time: 6/30/2010 2:45:52 AM

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.74$  mho/m;  $\epsilon_r = 38.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.22, 7.22, 7.22); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Tilt Low/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.335 mW/g

**Tilt Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.8 V/m; Power Drift = 0.119 dB

Peak SAR (extrapolated) = 0.692 W/kg

**SAR(1 g) = 0.311 mW/g; SAR(10 g) = 0.151 mW/g**

Maximum value of SAR (measured) = 0.339 mW/g

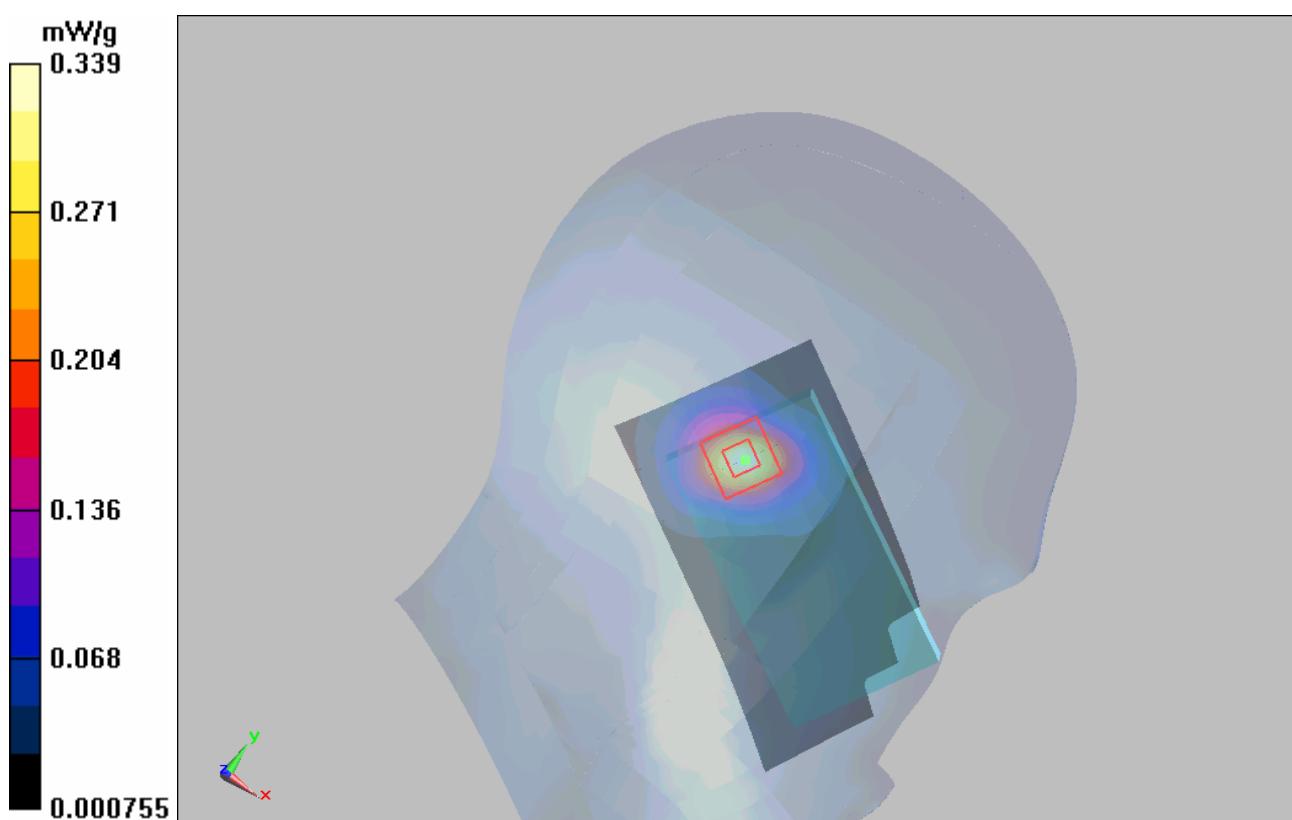


Figure 70 Left Hand Tilt 15° 802.11b Channel 1

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0908

Page 120 of 185

**802.11b Right Cheek Middle**

Date/Time: 6/30/2010 1:27:39 AM

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.77$  mho/m;  $\epsilon_r = 38.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.22, 7.22, 7.22); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Cheek Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.223 mW/g

**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 0.539 W/kg

**SAR(1 g) = 0.207 mW/g; SAR(10 g) = 0.114 mW/g**

Maximum value of SAR (measured) = 0.224 mW/g

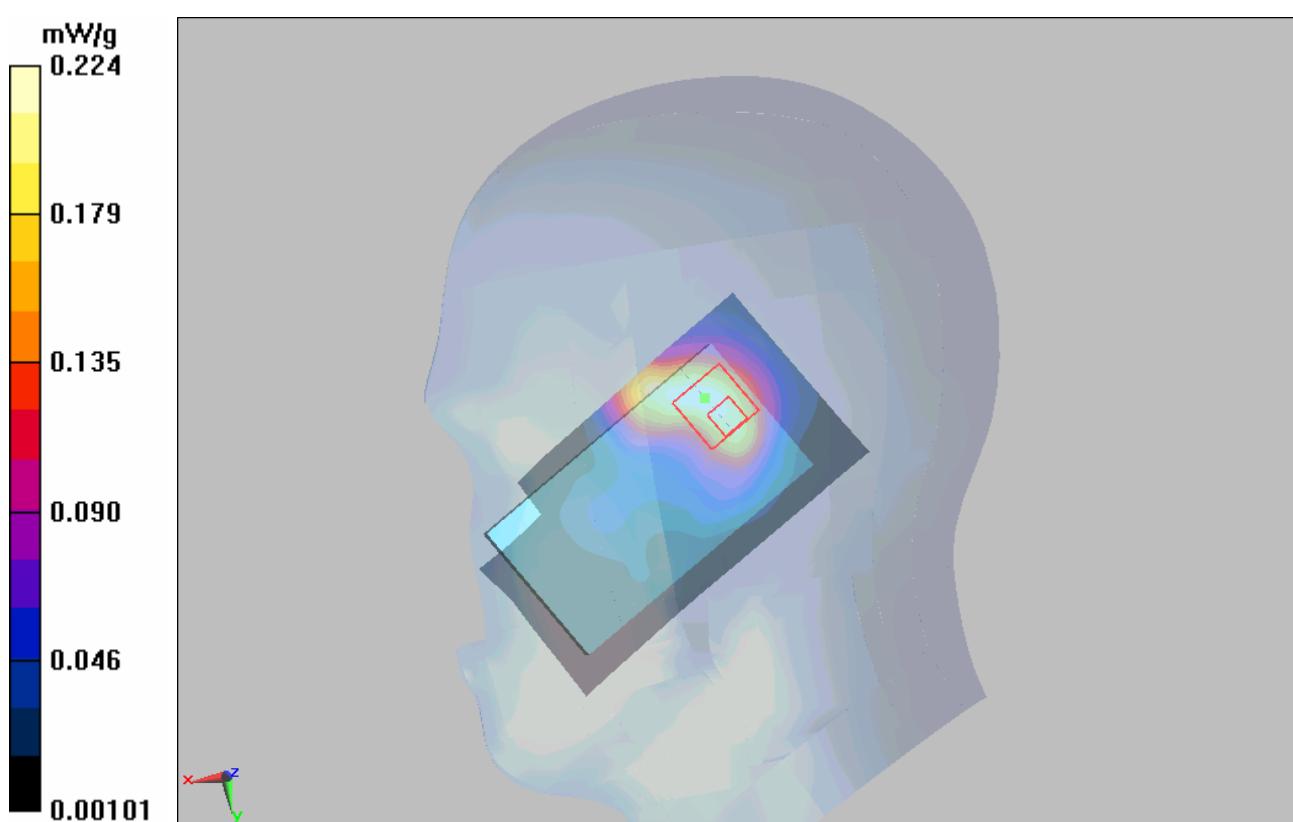


Figure 71 Right Hand Touch Cheek 802.11b Channel 6

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 121 of 185

## 802.11b Right Tilt Middle

Date/Time: 6/30/2010 1:56:22 AM

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.77$  mho/m;  $\epsilon_r = 38.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.22, 7.22, 7.22); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Tilt Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.294 mW/g

**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.6 V/m; Power Drift = 0.043 dB

Peak SAR (extrapolated) = 0.588 W/kg

**SAR(1 g) = 0.270 mW/g; SAR(10 g) = 0.135 mW/g**

Maximum value of SAR (measured) = 0.292 mW/g

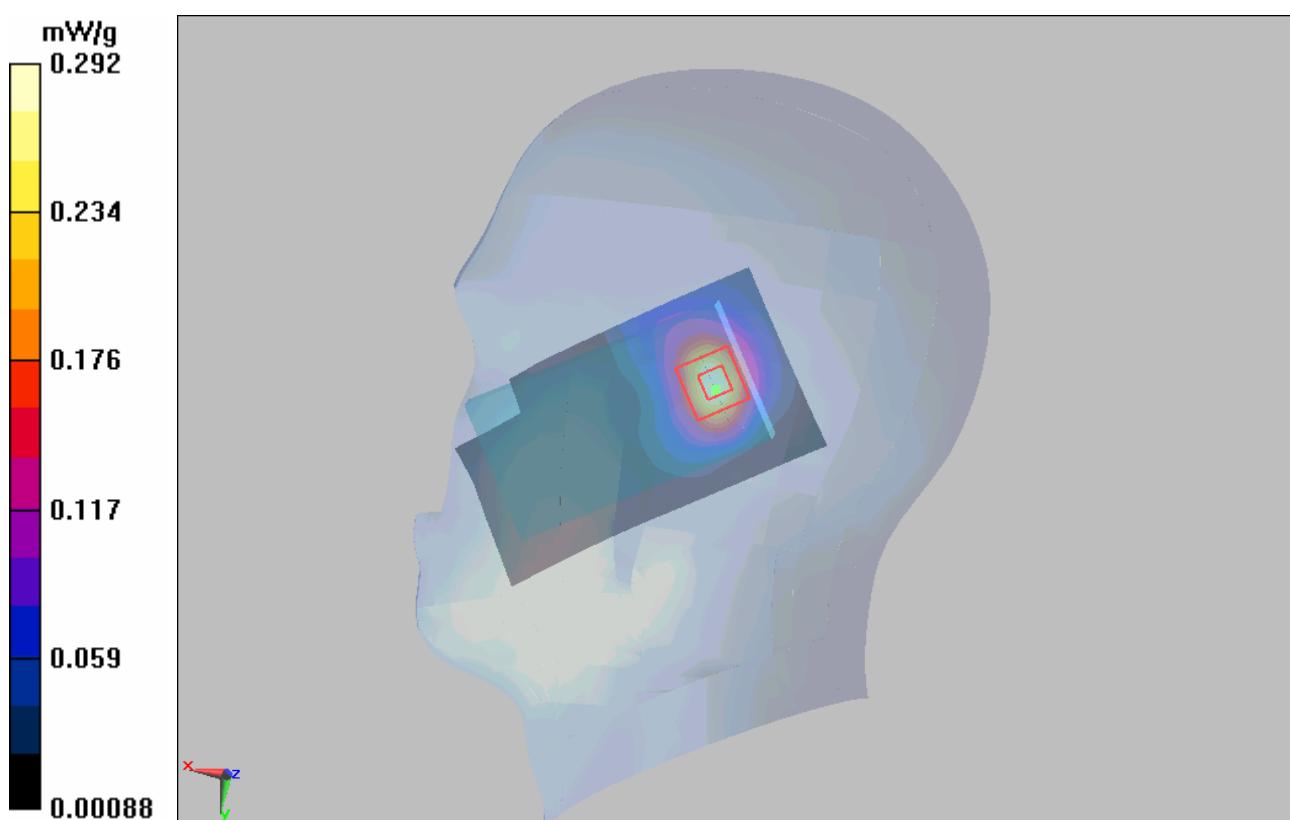


Figure 72 Right Hand Tilt 15° 802.11b Channel 6

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0908

Page 122 of 185

## 802.11b Towards Ground Middle

Date/Time: 6/30/2010 3:29:24 AM

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.77$  mho/m;  $\epsilon_r = 38.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.34, 7.34, 7.34); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Towards Ground Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.080 mW/g

**Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.55 V/m; Power Drift = -0.068 dB

Peak SAR (extrapolated) = 0.153 W/kg

**SAR(1 g) = 0.076 mW/g; SAR(10 g) = 0.043 mW/g**

Maximum value of SAR (measured) = 0.079 mW/g

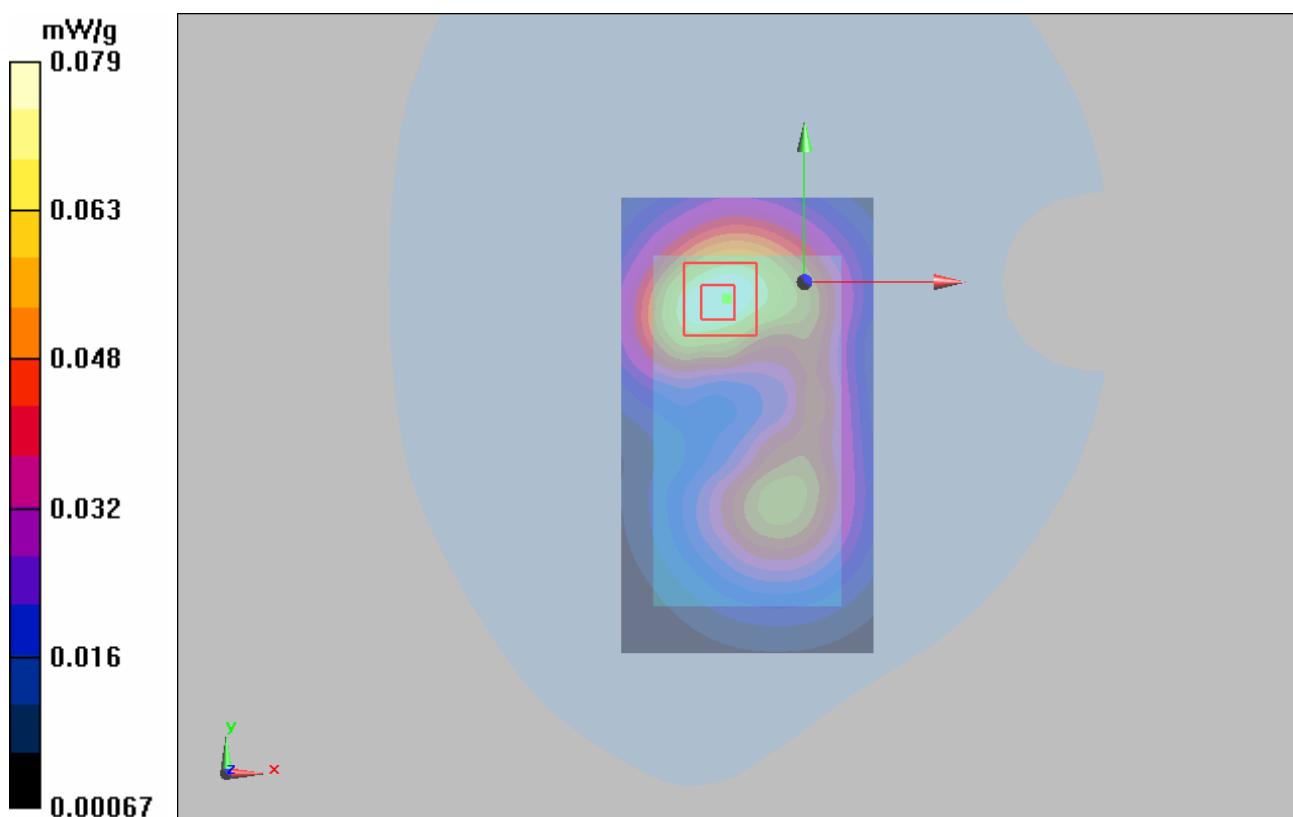


Figure 73 Body, Towards Ground, 802.11b Channel 6

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 123 of 185

## 802.11b Towards Phantom High

Date/Time: 6/30/2010 4:37:02 AM

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.8$  mho/m;  $\epsilon_r = 38.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.34, 7.34, 7.34); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Towards Phantom High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.094 mW/g

**Towards Phantom High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.12 V/m; Power Drift = 0.021 dB

Peak SAR (extrapolated) = 0.203 W/kg

**SAR(1 g) = 0.091 mW/g; SAR(10 g) = 0.050 mW/g**

Maximum value of SAR (measured) = 0.095 mW/g

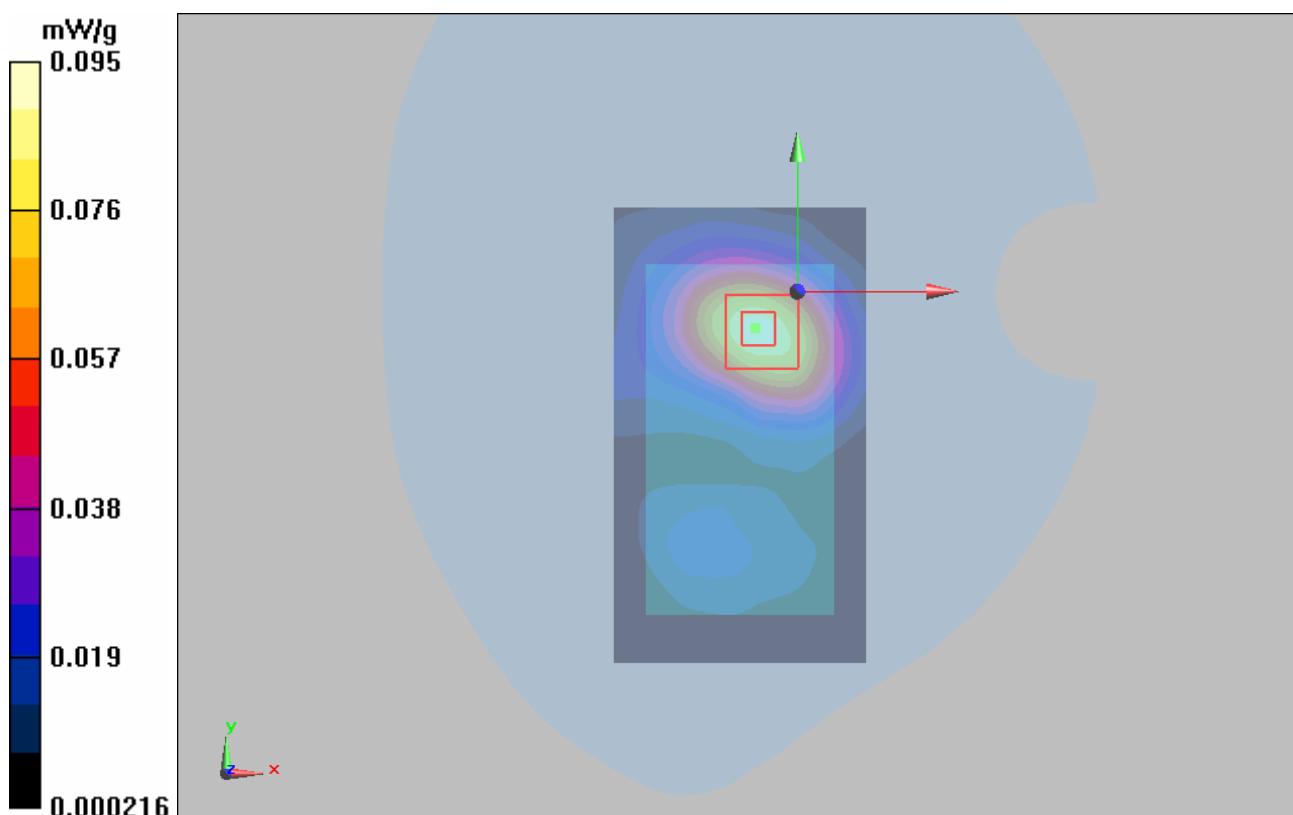


Figure 74 Body, Towards Phantom, 802.11b Channel 11

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 124 of 185

## 802.11b Towards Phantom Middle

Date/Time: 6/30/2010 3:51:34 AM

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.77$  mho/m;  $\epsilon_r = 38.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.34, 7.34, 7.34); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Towards Phantom Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.086 mW/g

**Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.23 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.180 W/kg

**SAR(1 g) = 0.079 mW/g; SAR(10 g) = 0.043 mW/g**

Maximum value of SAR (measured) = 0.083 mW/g

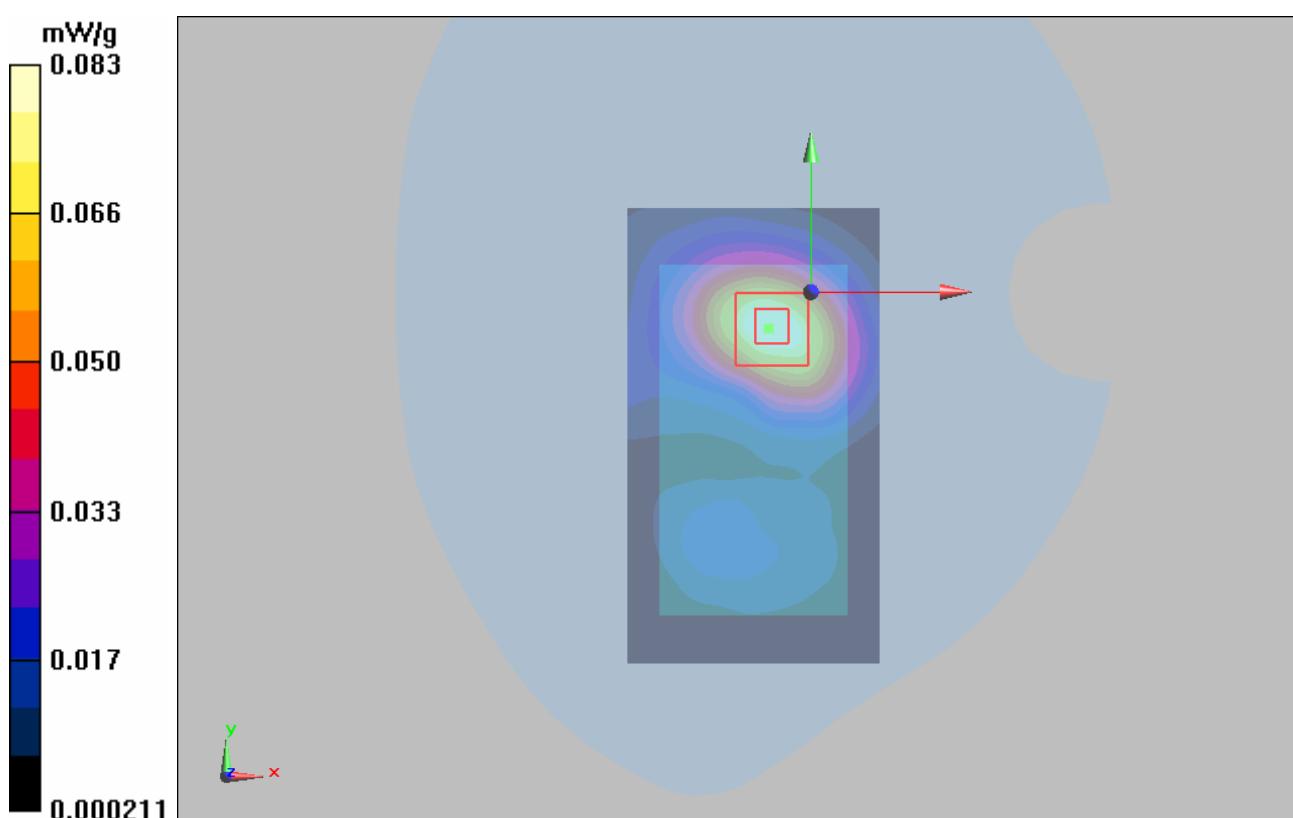


Figure 75 Body, Towards Phantom, 802.11b Channel 6

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 125 of 185

## 802.11b Towards Phantom Low

Date/Time: 6/30/2010 4:14:56 AM

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.74$  mho/m;  $\epsilon_r = 38.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.34, 7.34, 7.34); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Towards Phantom Low/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.090 mW/g

**Towards Phantom Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.01 V/m; Power Drift = -0.156 dB

Peak SAR (extrapolated) = 0.182 W/kg

**SAR(1 g) = 0.083 mW/g; SAR(10 g) = 0.045 mW/g**

Maximum value of SAR (measured) = 0.086 mW/g

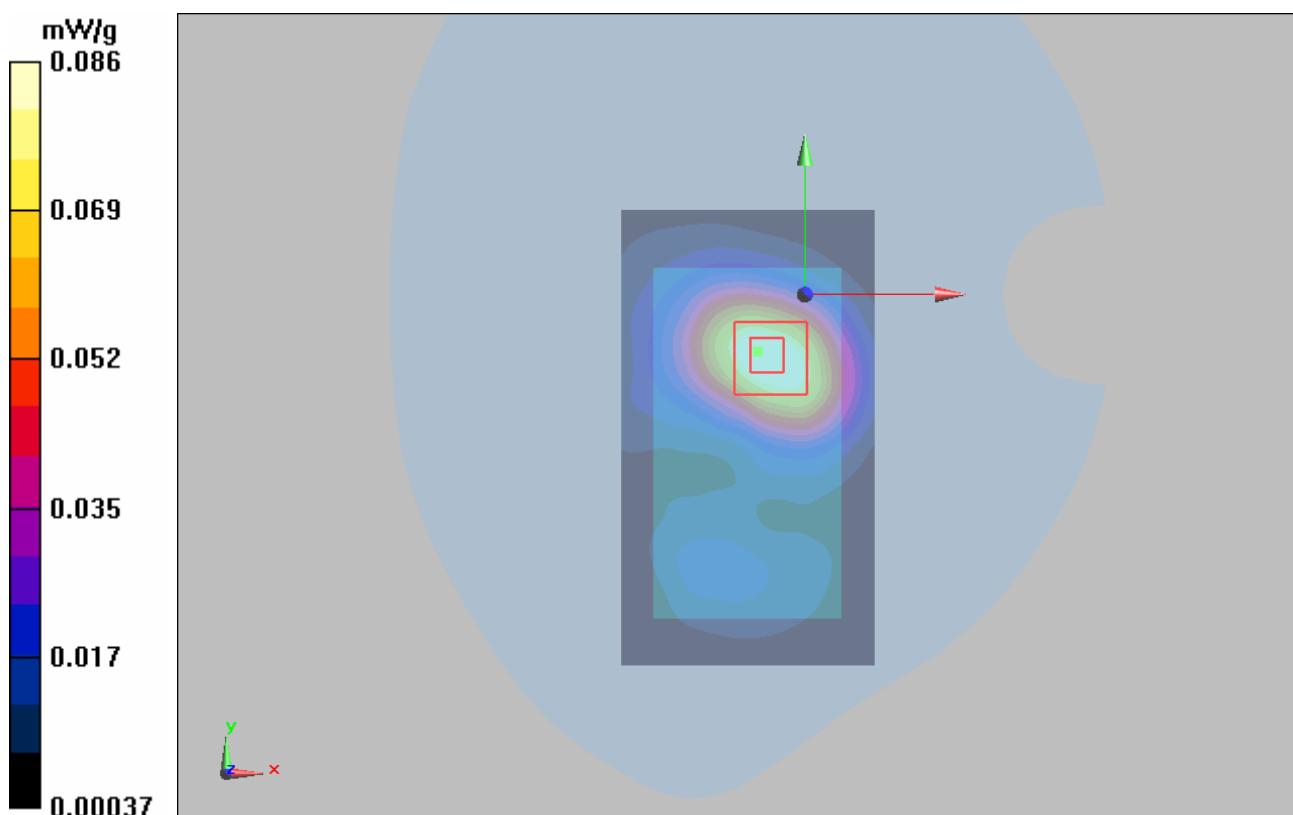


Figure 76 Body, Towards Phantom, 802.11b Channel 1

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0908

Page 126 of 185

### 802.11g Left Cheek Middle

Date/Time: 6/30/2010 3:10:43 AM

Communication System: 802.11g; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.77$  mho/m;  $\epsilon_r = 38.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.22, 7.22, 7.22); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Cheek Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.254 mW/g

**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.4 V/m; Power Drift = 0.153 dB

Peak SAR (extrapolated) = 0.549 W/kg

**SAR(1 g) = 0.252 mW/g; SAR(10 g) = 0.125 mW/g**

Maximum value of SAR (measured) = 0.275 mW/g

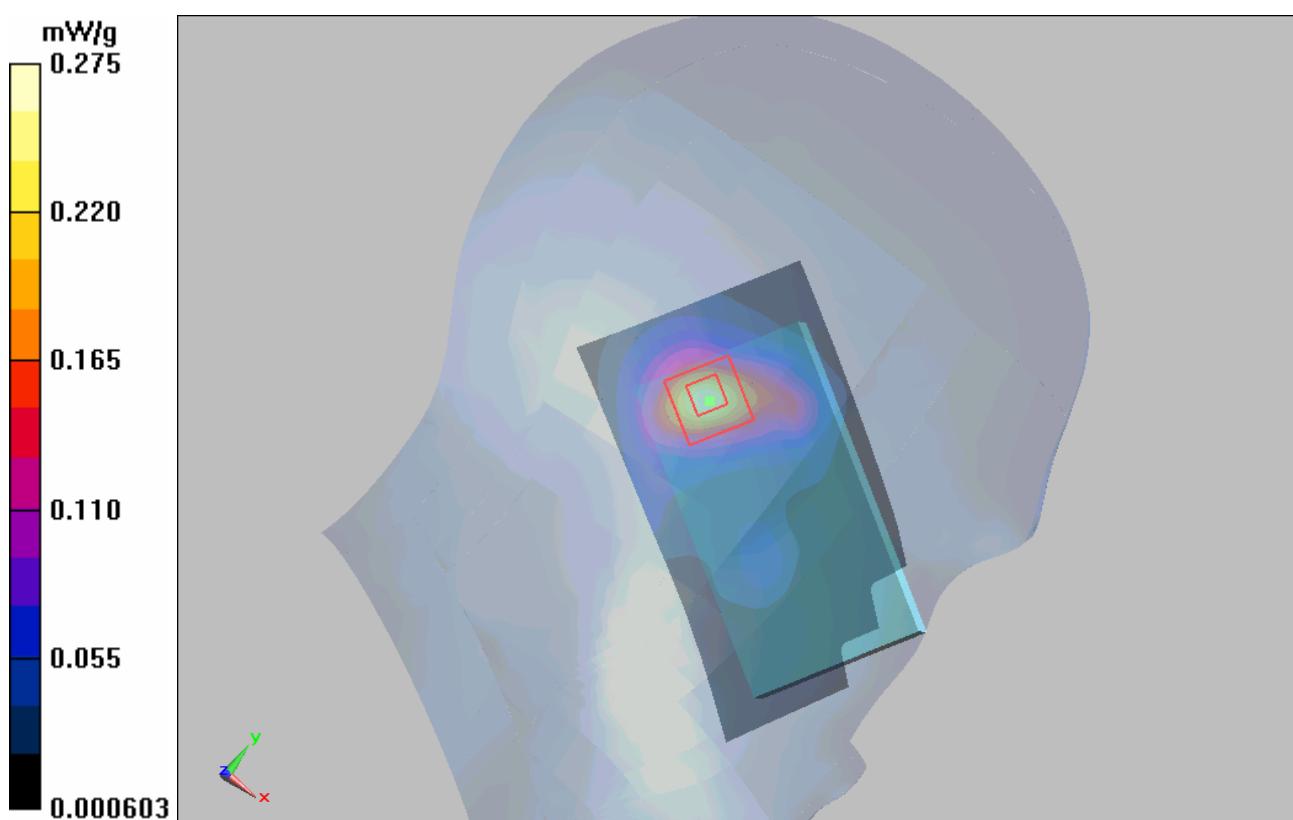


Figure 77 Left Hand Touch Cheek 802.11g Channel 6

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0908

Page 127 of 185

### 802.11g Left Tilt High

Date/Time: 6/30/2010 5:35:09 AM

Communication System: 802.11g; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.8$  mho/m;  $\epsilon_r = 38.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.22, 7.22, 7.22); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Tilt High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.304 mW/g

**Tilt High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.9 V/m; Power Drift = 0.067 dB

Peak SAR (extrapolated) = 0.637 W/kg

**SAR(1 g) = 0.286 mW/g; SAR(10 g) = 0.137 mW/g**

Maximum value of SAR (measured) = 0.320 mW/g

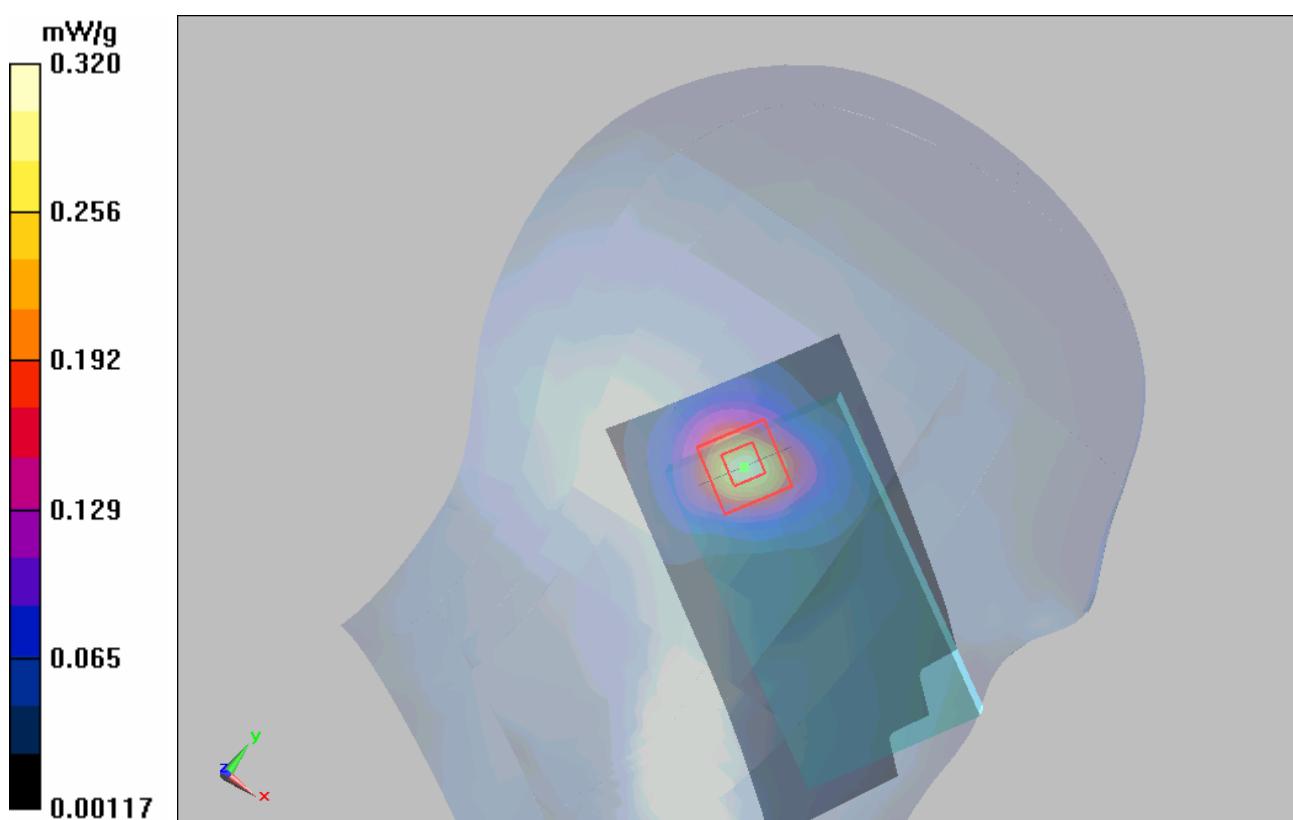


Figure 78 Left Hand Tilt 15° 802.11g Channel 11

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0908

Page 128 of 185

**802.11g Left Tilt Middle**

Date/Time: 6/30/2010 5:03:58 AM

Communication System: 802.11g; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.77$  mho/m;  $\epsilon_r = 38.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.22, 7.22, 7.22); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Tilt Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.334 mW/g


**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.6 V/m; Power Drift = 0.039 dB

Peak SAR (extrapolated) = 0.688 W/kg

**SAR(1 g) = 0.319 mW/g; SAR(10 g) = 0.157 mW/g**

Maximum value of SAR (measured) = 0.350 mW/g

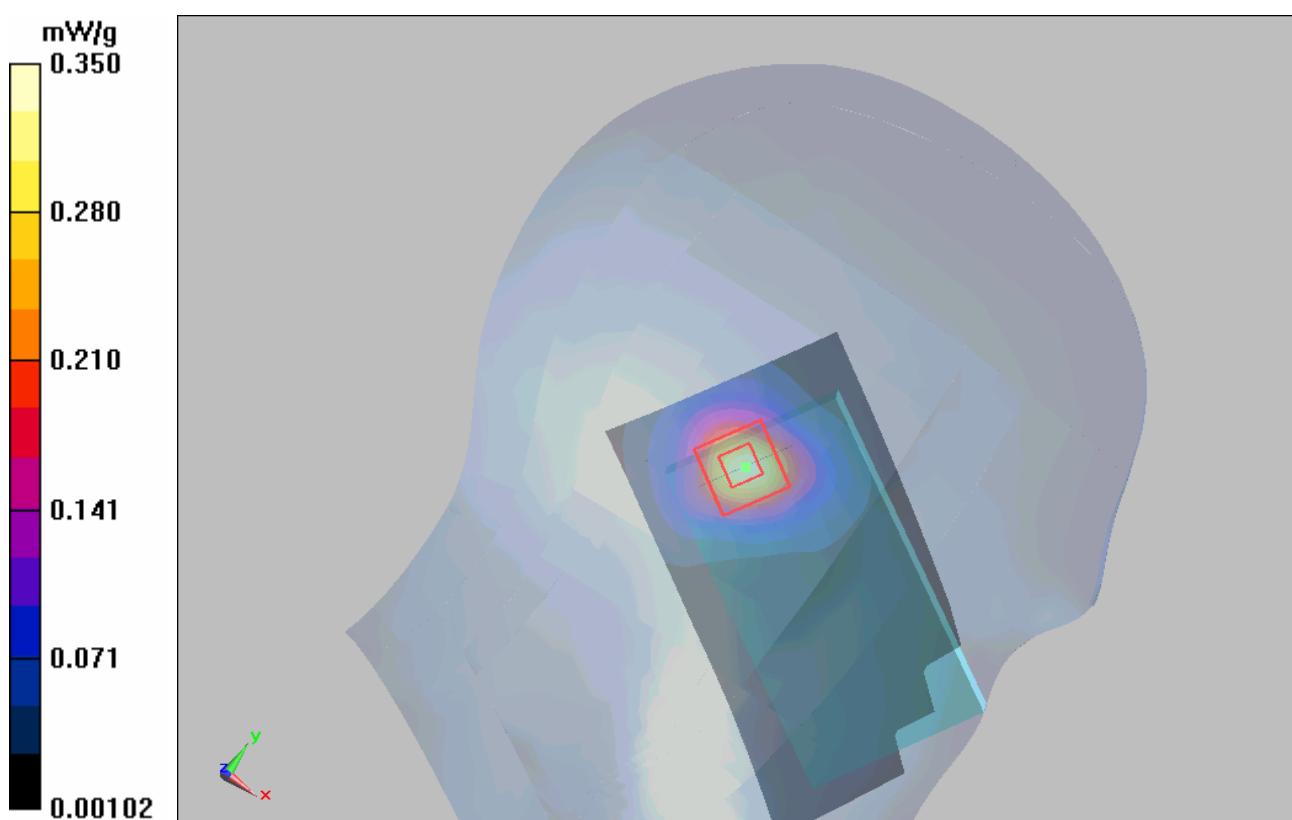

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0908

Page 129 of 185

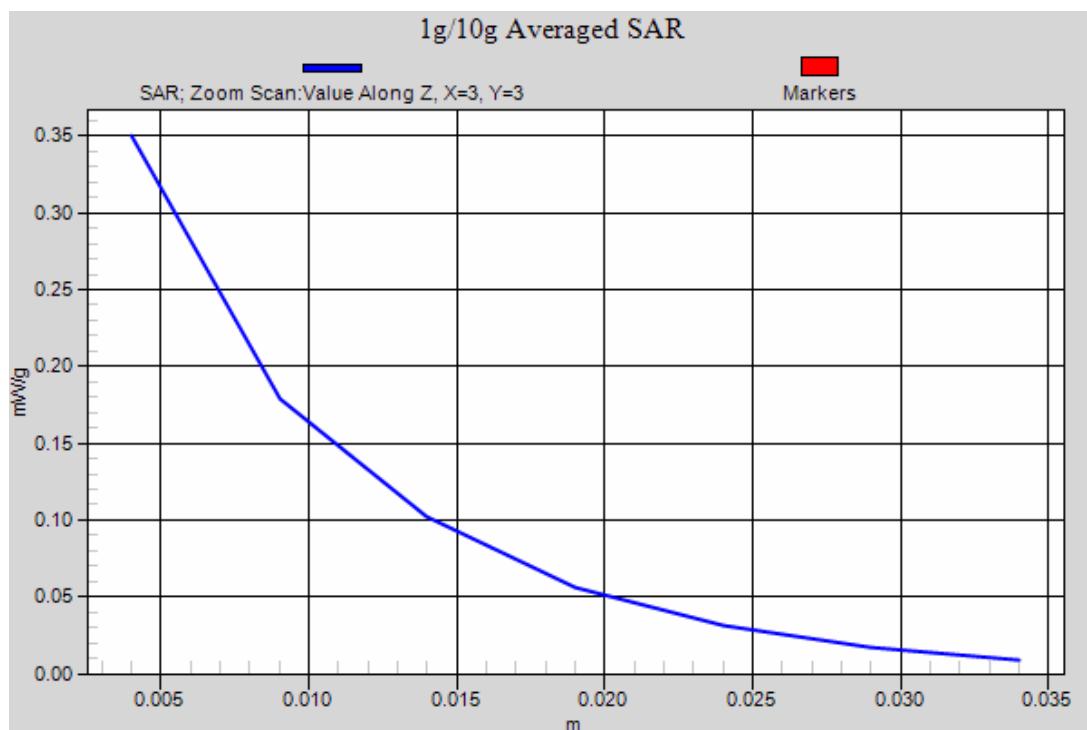


Figure 79 Left Hand Tilt 15° 802.11g Channel 6

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0908

Page 130 of 185

### 802.11g Left Tilt Low

Date/Time: 6/30/2010 6:01:57 AM

Communication System: 802.11g; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.74$  mho/m;  $\epsilon_r = 38.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.22, 7.22, 7.22); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Tilt Low/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.285 mW/g

**Tilt Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.9 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 0.616 W/kg

**SAR(1 g) = 0.272 mW/g; SAR(10 g) = 0.130 mW/g**

Maximum value of SAR (measured) = 0.305 mW/g

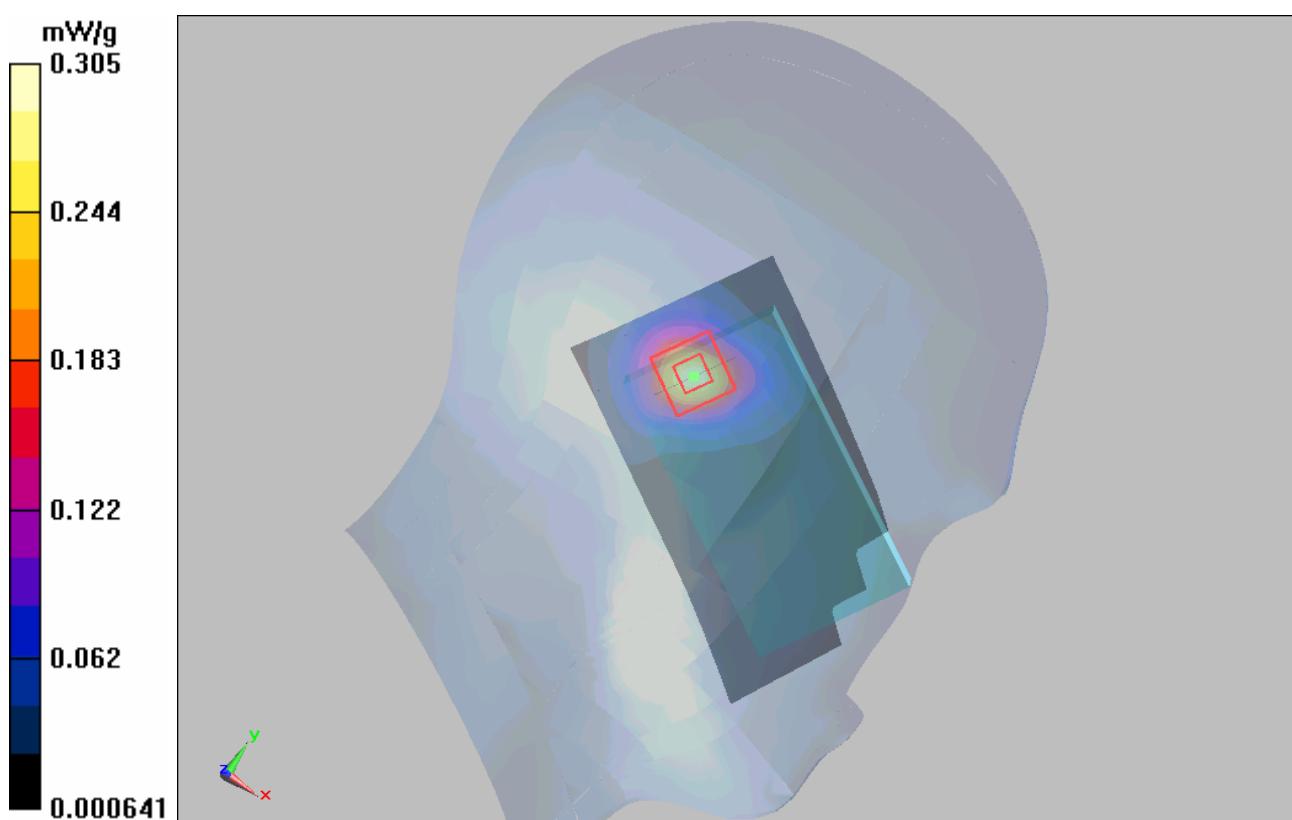


Figure 80 Left Hand Tilt 15° 802.11g Channel 1

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0908

Page 131 of 185

### 802.11g Right Cheek Middle

Date/Time: 6/30/2010 7:42:31 AM

Communication System: 802.11g; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.77$  mho/m;  $\epsilon_r = 38.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.22, 7.22, 7.22); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Cheek Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.221 mW/g

**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.8 V/m; Power Drift = 0.005 dB

Peak SAR (extrapolated) = 0.530 W/kg

**SAR(1 g) = 0.197 mW/g; SAR(10 g) = 0.100 mW/g**

Maximum value of SAR (measured) = 0.217 mW/g

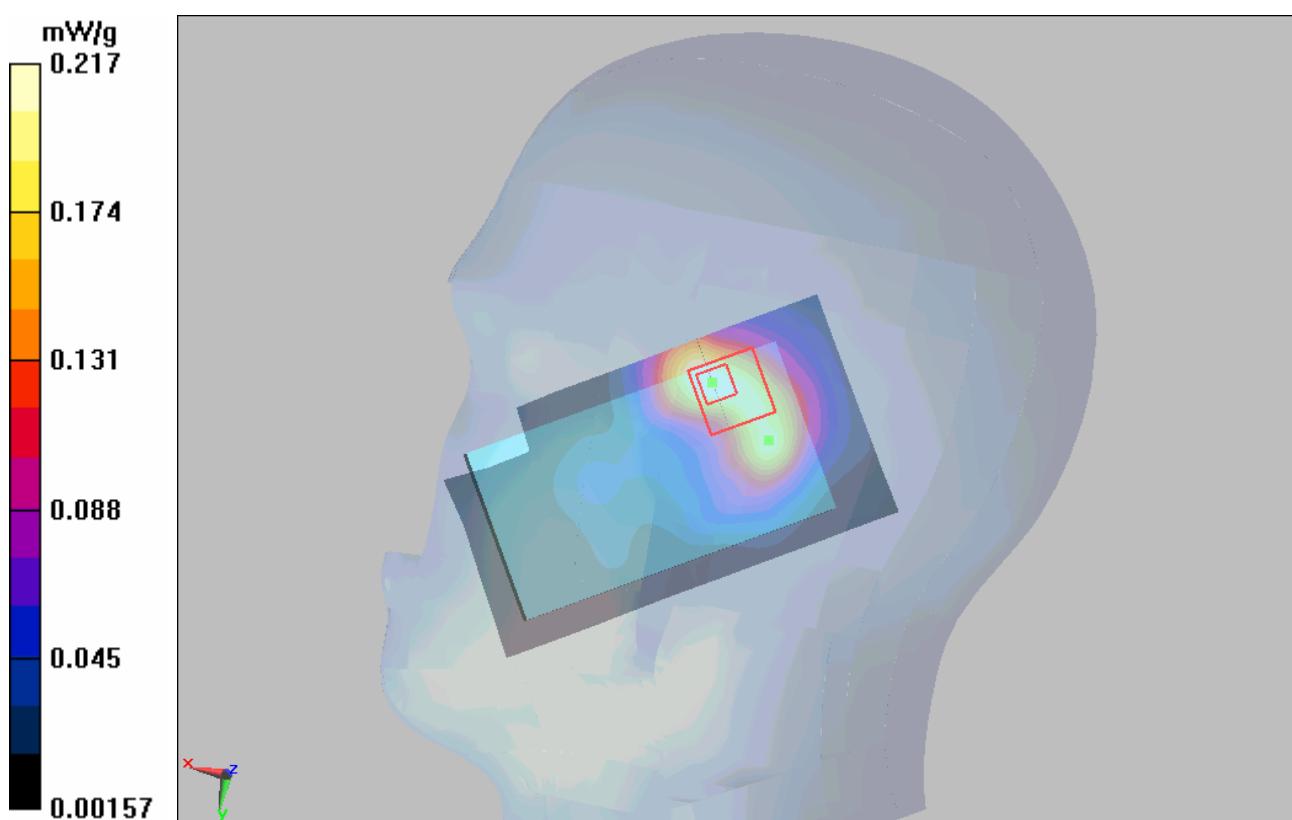


Figure 81 Right Hand Touch Cheek 802.11g Channel 6

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0908

Page 132 of 185

### 802.11g Right Tilt Middle

Date/Time: 6/30/2010 7:18:09 AM

Communication System: 802.11g; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.77$  mho/m;  $\epsilon_r = 38.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.22, 7.22, 7.22); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Tilt Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.289 mW/g

**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.9 V/m; Power Drift = 0.042 dB

Peak SAR (extrapolated) = 0.599 W/kg

**SAR(1 g) = 0.270 mW/g; SAR(10 g) = 0.135 mW/g**

Maximum value of SAR (measured) = 0.293 mW/g

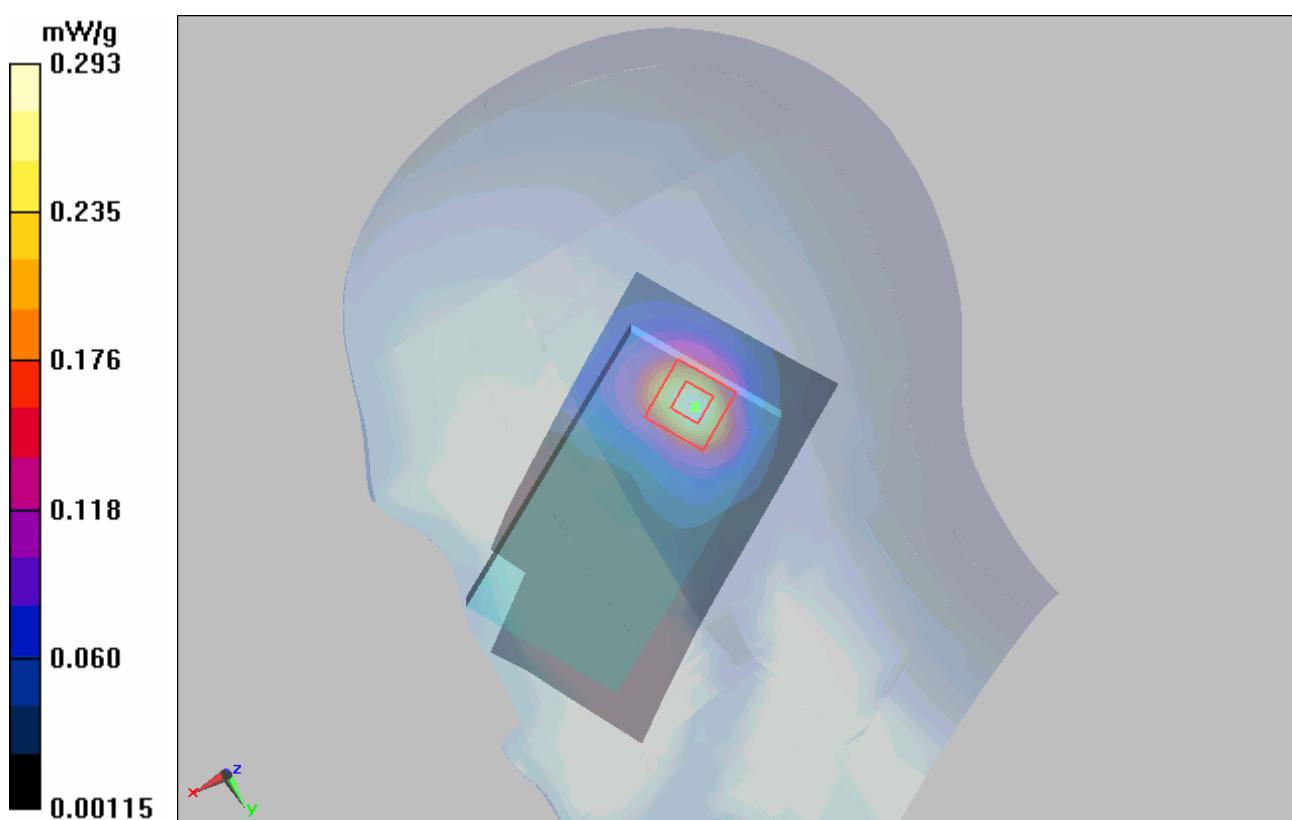


Figure 82 Right Hand Tilt 15° 802.11g Channel 6

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0908

Page 133 of 185

## 802.11g Towards Ground High

Date/Time: 6/30/2010 7:39:12 AM

Communication System: 802.11g; Frequency: 2472 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2472$  MHz;  $\sigma = 1.95$  mho/m;  $\epsilon_r = 51.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.34, 7.34, 7.34); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Ground High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.119 mW/g


**Towards Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.41 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 0.232 W/kg

**SAR(1 g) = 0.118 mW/g; SAR(10 g) = 0.067 mW/g**

Maximum value of SAR (measured) = 0.124 mW/g

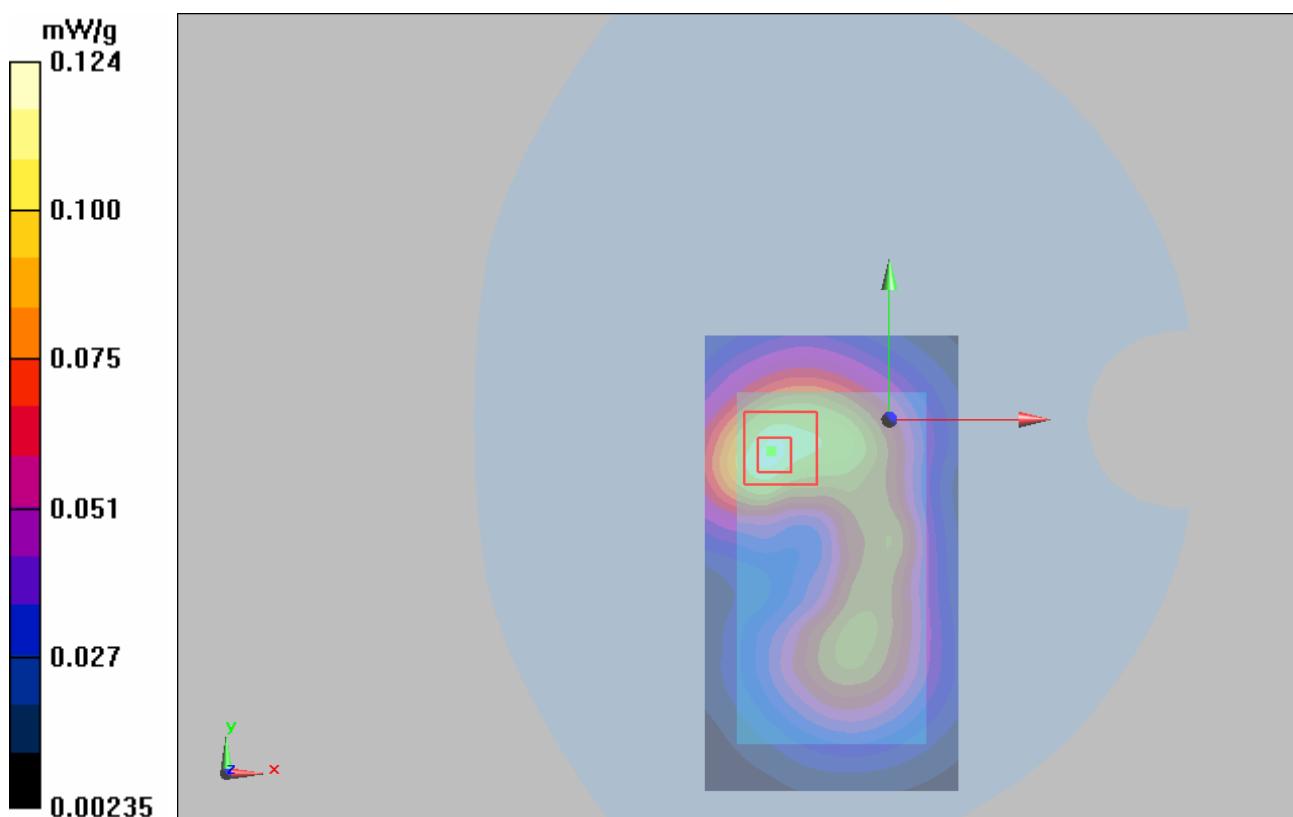

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0908

Page 134 of 185

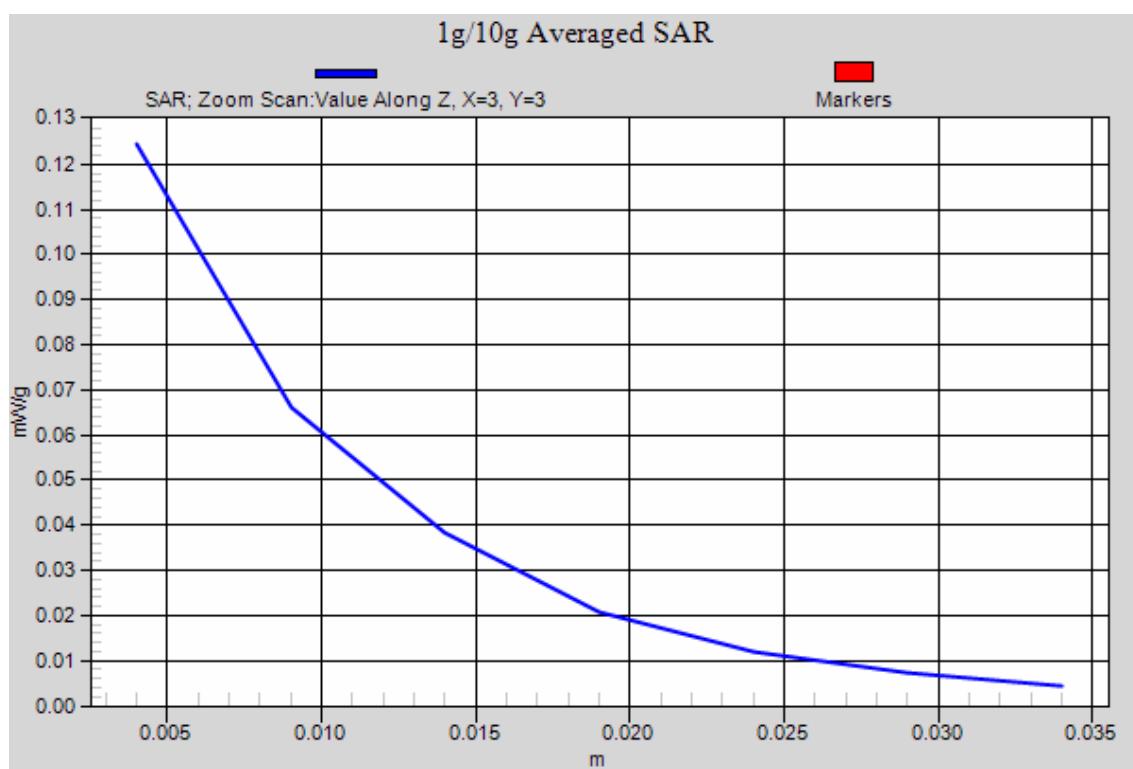


Figure 83 Body, Towards Ground, 802.11g Channel 11

## 802.11g Towards Ground Middle

Date/Time: 6/30/2010 6:51:44 AM

Communication System: 802.11g; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.91$  mho/m;  $\epsilon_r = 51.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.34, 7.34, 7.34); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Ground Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.118 mW/g

**Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.87 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 0.222 W/kg

**SAR(1 g) = 0.113 mW/g; SAR(10 g) = 0.065 mW/g**

Maximum value of SAR (measured) = 0.121 mW/g

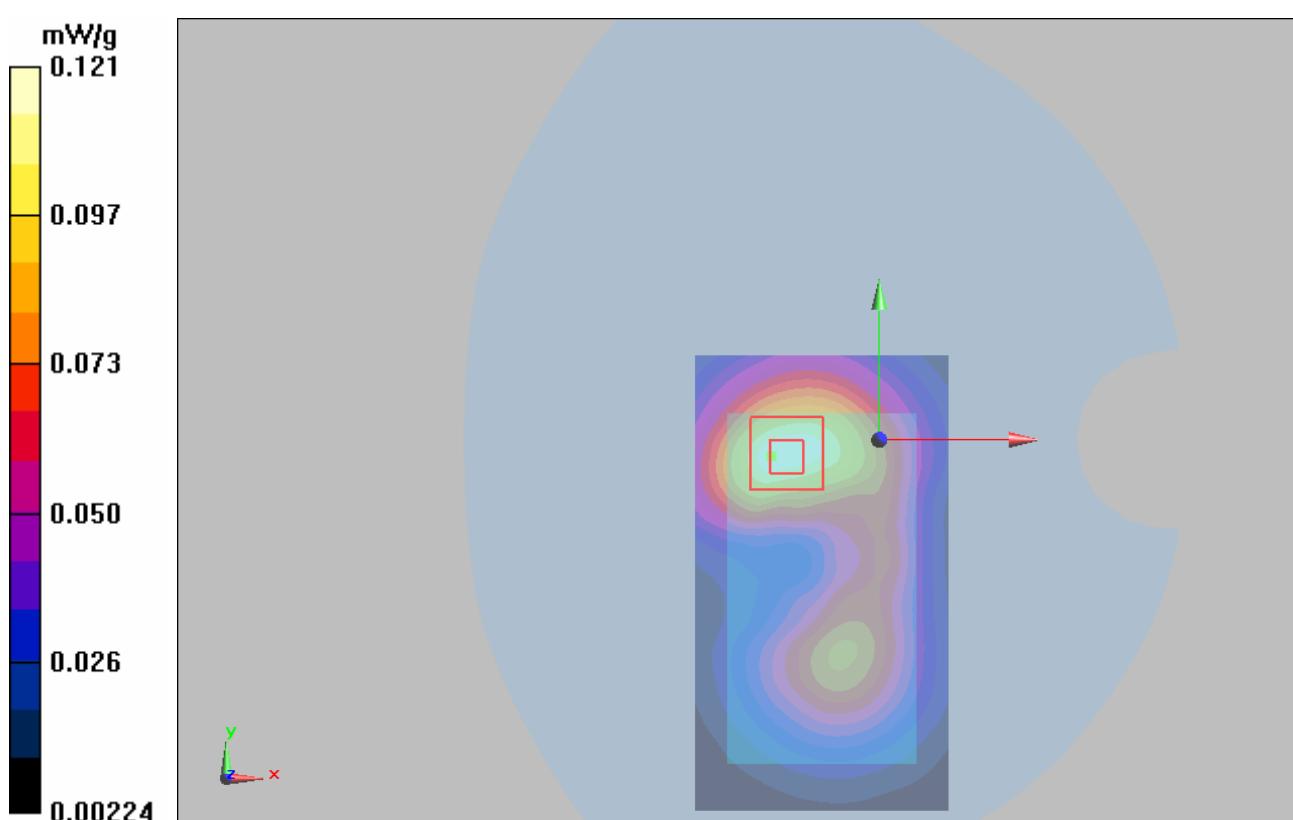


Figure 84 Body, Towards Ground, 802.11g Channel 6

## 802.11g Towards Ground Low

Date/Time: 6/30/2010 7:15:59 AM

Communication System: 802.11g; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 51.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.34, 7.34, 7.34); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Ground Low/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.116 mW/g

**Towards Ground Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.76 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 0.210 W/kg

**SAR(1 g) = 0.109 mW/g; SAR(10 g) = 0.063 mW/g**

Maximum value of SAR (measured) = 0.115 mW/g

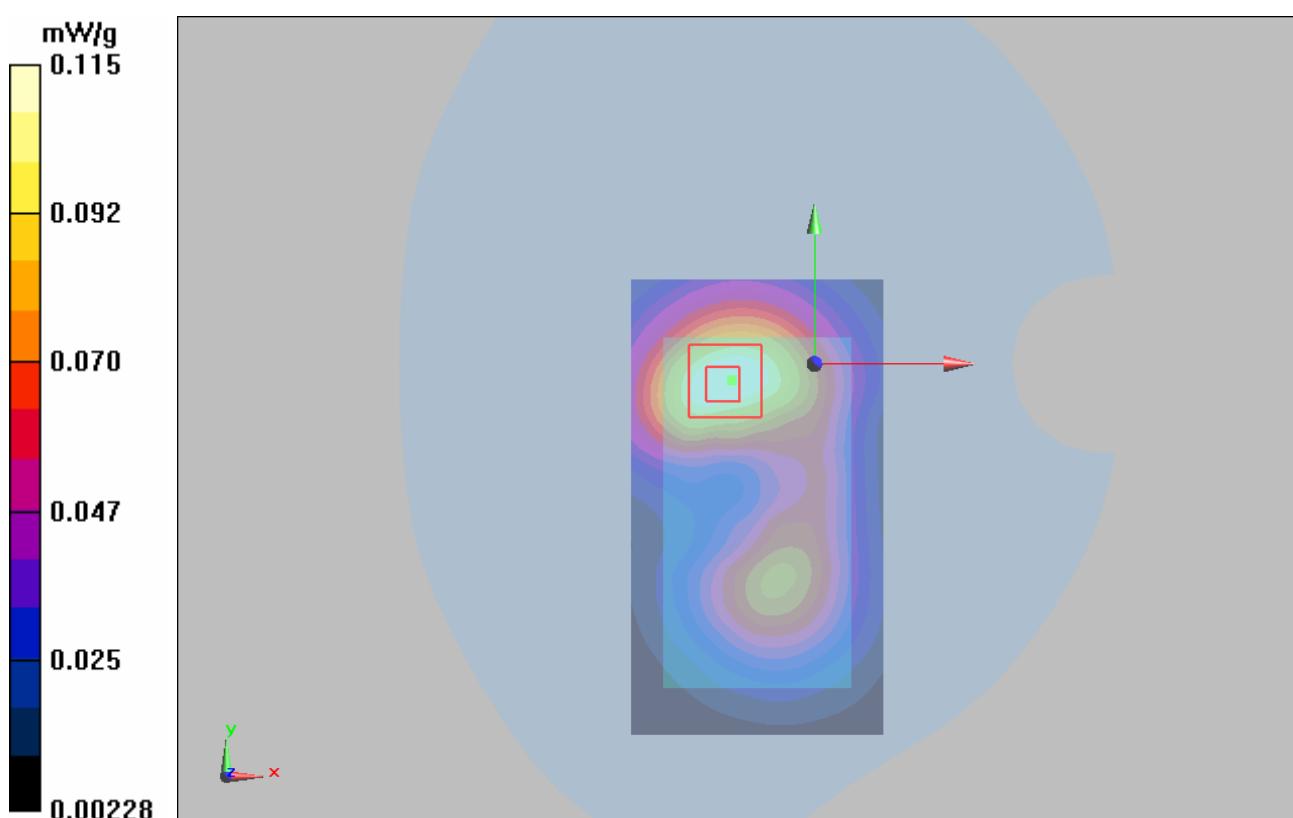


Figure 85 Body, Towards Ground, 802.11g Channel 1

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0908

Page 137 of 185

### 802.11g Towards Phantom Middle

Date/Time: 6/30/2010 6:28:09 AM

Communication System: 802.11g; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.91$  mho/m;  $\epsilon_r = 51.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3661; ConvF(7.34, 7.34, 7.34); Calibrated: 12/30/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Phantom Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.130 mW/g

**Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.58 V/m; Power Drift = -0.133 dB

Peak SAR (extrapolated) = 0.233 W/kg

**SAR(1 g) = 0.113 mW/g; SAR(10 g) = 0.062 mW/g**

Maximum value of SAR (measured) = 0.120 mW/g

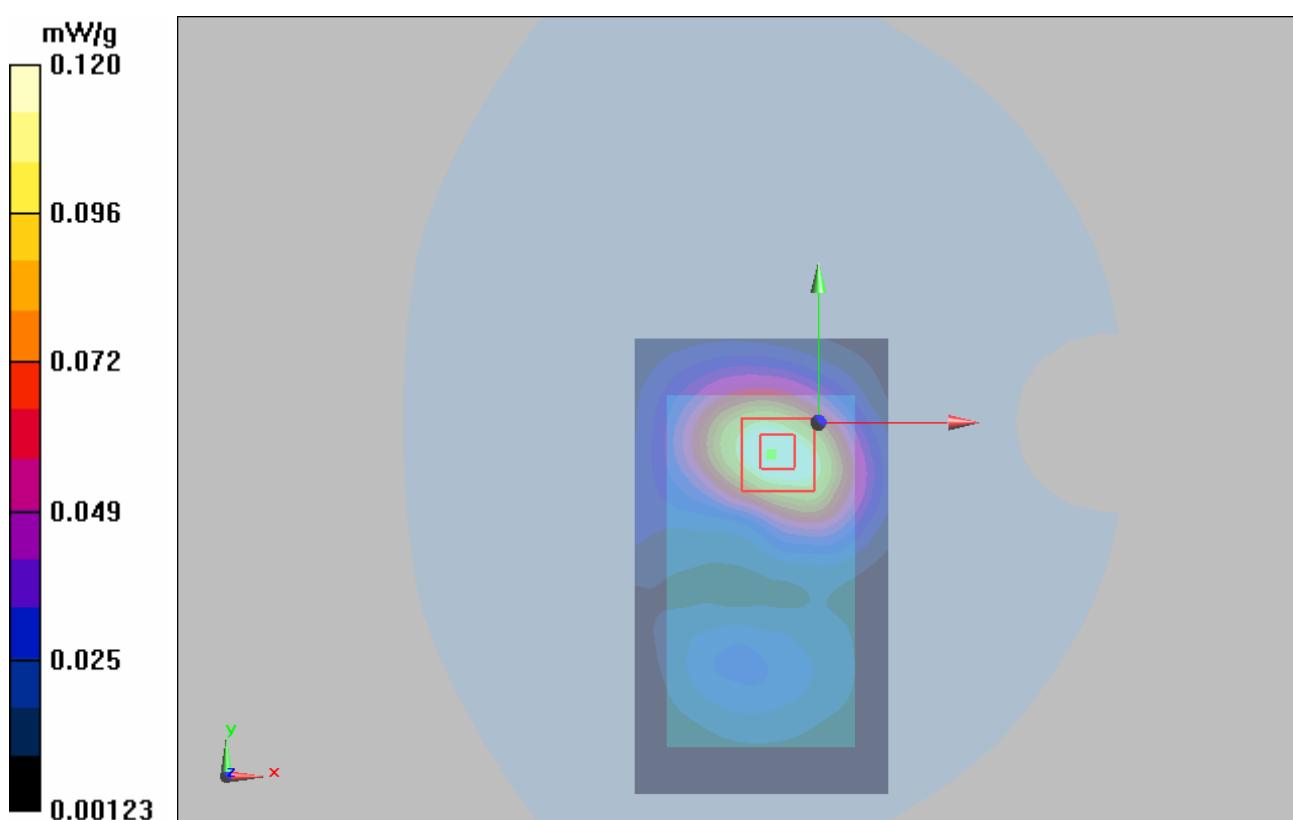


Figure 86 Body, Towards Phantom, 802.11g Channel 6