



TEST REPORT

No. 2008TAR051

for

ZTE Corporation

WCDMA/ GSM /GPRS Mobile Handset

Type: F165

with

Hardware Version: wk6B

Software Version: F165 T01

Issued Date: Sep 26th, 2008



No. DAT-P-114/01-01

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

TMC Beijing, Telecommunication Metrology Center of Ministry of Information Industry

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100083.

Tel:+86(0)10-62303288-2105, Fax:+86(0)10-62304793 Email:welcome@emcite.com. www.emcite.com

©Copyright. All rights reserved by TMC Beijing.

CONTENTS

1. TEST LABORATORY.....	3
1.1. TESTING LOCATION	3
1.2. TESTING ENVIRONMENT	3
1.3. PROJECT DATA.....	3
1.4. SIGNATURE	3
2. CLIENT INFORMATION.....	4
2.1. APPLICANT INFORMATION.....	4
2.2. MANUFACTURER INFORMATION.....	4
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	5
3.1. ABOUT EUT	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	5
3.4. GENERAL DESCRIPTION	6
3.5. EUT INFORMATION.....	错误! 未定义书签。
4. REFERENCE DOCUMENTS	7
4.1. REFERENCE DOCUMENTS FOR TESTING.....	7
5. LABORATORY ENVIRONMENT	7
6. SUMMARY OF TEST RESULTS.....	8
7. TEST EQUIPMENTS UTILIZED.....	8
ANNEX A: EUT PHOTOGRAPH.....	10
ANNEX B: MEASUREMENT RESULTS.....	15
B.1 OUTPUT POWER.....	15
B.2 EMISSION LIMIT	19
B.3 RECEIVER RADIATION EMISSION	43
B.4 CONDUCTED EMISSION.....	51
B.5 FREQUENCY STABILITY	58
B.6 OCCUPIED BANDWIDTH	61
B.7 EMISSION BANDWIDTH.....	77
B.9 BAND EDGE COMPLIANCE	93
B.10 CONDUCTED SPURIOUS EMISSION	101
ANNEX C: TEST LAYOUT.....	121

1. Test Laboratory

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MII
Address: No 52, Huayuan beilu, Haidian District, Beijing,P.R.China
Postal Code: 100083
Telephone: 00861062303288
Fax: 00861062304793


1.2. Testing Environment

Normal Temperature: 15-35℃
Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: Sep 4,2008
Testing End Date: Sep 15,2008

1.4. Signature



Zi Xiaogang
(Prepared this test report)



Sun Xiangqian
(Reviewed this test report)



Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: ZTE Corporation
Address /Post: ZTE Plaza, Keji Road South, Hi-Tech Industrial Park,Nanshan
District,Shenzhen, Guangdong, 518057, P.R.China
City: Shenzhen
Postal Code: 518057
Country: China
Telephone: +86-21-68895196
Fax: +86-21-50801070

2.2. Manufacturer Information

Company Name: ZTE Corporation
Address /Post: ZTE Plaza, Keji Road South, Hi-Tech Industrial Park,Nanshan
District,Shenzhen, Guangdong, 518057, P.R.China
City: Shenzhen
Postal Code: 518057
Country: China
Telephone: +86-21-68895196
Fax: +86-21-50801070

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	WCDMA/ GSM /GPRS Mobile Handset
Model	F165
FCC ID	Q78-ZTEF165
IC	5200A-ZTEF165
Frequency	PCS 1900MHz;GSM 850 MHz; WCDMA Band II ;WCDMA Band V
Antenna	Internal
Power supply	Battery or Charger (AC Adaptor)
Output power	30.92 dBm maximum ERP measured for GSM 850
Extreme vol. Limits	3.4VDC to 4.2VDC (nominal: 3.7 VDC)
Extreme temp. Tolerance	-30°C to +50°C

Note: Photographs of EUT are shown in ANNEX A of this test report. Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MII of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
N02	357407010004121	wk6B	F165 T01

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	Battery	60120802290047663
AE2	Travel Adapter	/

AE1

Model	Li3713T42P3h614057
Manufacturer	SCUD(FUJIAN)ElectronicsCo.LTD
Capacitance	1300mAh
Nominal Voltage	3.7V

AE2

Model	STC-A22O50U8-C
Manufacturer	Shenzhen Dokocom Emergy Technology Co., Ltd
Length of DC line	180cm

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment Under Test (EUT) is a model of WCDMA/ GSM /GPRS Mobile Handset with integrated antenna. It consists of Hand Telephone Set and normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the Client.

3.5. Emission Designator

Frequency Band	Frequency Range	Emission Designator
GSM 850	824.2~848.8 MHz	300KGXW
GPRS 850	824.2~848.8 MHz	300KG7W
EGPRS 850	824.2~848.8 MHz	300KG7W
GSM 1900	1850.2~1909.8MHz	300KGXW
GPRS 1900	1850.2~1909.8MHz	300KG7W
EGPRS 1900	1850.2~1909.8MHz	300KG7W
WCDMA Band II	1852.4~1907.6MHz	4M50F9W
WCDMA Band V	826.4~846.6MHz	4M50F9W

WCDMA Emission Designator description

Emission Designator	WCDMA Band II	WCDMA Band V
WCDMA BW	4M50F9W	4M50F9W
F	4.5MHz	4.5MHz
9	Frequency Modulation	
W	Composite Digital Info	
	Combination (Audio/Data)	

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	V 10.1.06
FCC Part 22	PUBLIC MOBILE SERVICES	V 10.1.06
RSS132	Cellular Telephones Employing New Technologies Operating in the Bands 824-849 MHz and 869-894 MHz	2005
RSS133	2 GHz Personal Communications Services	2008
ANSI/TIA-603-C	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2004
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 2000 MHz

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber (6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 2000 MHz

6. SUMMARY OF TEST RESULTS

Items	List	Clause in FCC rules	Clause in IC rules	Verdict
1	Output Power	22.913(a)/24.232(b)	4.4/ 6.2	P
2	Emission Limit	2.1051/22.917/24.238	4.4/ 6.2	P
3	Receiver Radiation Emission	2.1053/RSS 133	4.6/6.6	P
4	Conducted Emission	15.107/207	/	P
5	Frequency Stability	2.1055/24.235	4.3/4.5/6.3	P
6	Occupied Bandwidth	2.1049(h)(i)	4.4.1/5.6	P
7	Emission Bandwidth	22.917(b)/24.238(b)	4.4.1/5.6	P
8	Band Edge Compliance	22.917(b)/24.238(b)	4.7/4.5/6.3	P
9	Conducted Spurious Emission	2.1057/22.917/24.238	4.5/6.5	P

7. Test Equipments Utilized

NO.	NAME	TYPE	SERIES NUMBER	PRODUCER	CAL DUE DATE
1	Test Receiver	ESS	847151/015	R&S	2008-10-30
2	Test Receiver	ESI40	831564/002	R&S	2009-2-11
3	BiLog Antenna	3142B	9908-1403	EMCO	2009-1-16
4	BiLog Antenna	3142B	9908-1405	EMCO	2009-9-19
5	Signal Generator	SMT06	831285/005	R&S	2008-12-26
6	Signal Generator	SMP04	100070	R&S	2009-4-20
7	LISN	ESH2-Z5	829991/012	R&S	2009-8

8	Spectrum Analyzer	FSU26	200030	R&S	2009-6-18
9	Universal Radio Communication Tester	CMU200	100680	R&S	2009-8-23
10	Dual-Ridge Waveguide Horn Antenna	3115	9906-5827	EMCO	2009-3
11	Dual-Ridge Waveguide Horn Antenna	3116	2663	EMCO	2009-3
12	Dual-Ridge Waveguide Horn Antenna	3116	2661	EMCO	2009-3
13	Climatic chamber	PL-2G	343074	ESPEC	2009-5-15

ANNEX A: EUT photograph

External Photo



Mobile Phone



Mobile Phone



Charger (AC/DC Adapter)



Label of Charger (AC/DC Adapter)



Battery



Battery

Internal Photo



Mobile phone Disassembly



Mobile phone Disassembly



Mobile phone Disassembly



Mobile phone Disassembly

ANNEX B: MEASUREMENT RESULTS

B.1 OUTPUT POWER

B.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure max power transmission and proper modulation.

This result contains peak output power and EIRP measurements for the EUT.

In all cases, output power is within the specified limits.

B.1.2 Conducted

B.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.

The power was measured with Rhode & Schwarz Spectrum Analyzer FSU (peak)

These measurements were done at 3 frequencies, 1850.2 MHz, 1880.0MHz and 1909.8MHz for PCS1900 band;824.4MHz, 836.6MHz and 848.8MHz for GSM850 band;1852.40MHz,1880.00 MHz and 1907.60 MHz for WCDMA Band II ;826.40 MHz, 836.60 MHz and 846.60 MHz for WCDMA Band V (bottom, middle and top of operational frequency range).

GSM850

Limit

Power step	Nominal Peak output power (dBm)	Tolerance (dB)
5	33dBm(2W)*	± 2

*GSM Specification – ETSI EN 300 910 V8.5.1 (2000-11) Section 4.1

Measurement result

GSM

CH	Frequency(MHz)	Peak output power(dBm)
128	824.2	31.76
190	836.6	31.83
251	848.8	31.90

GPRS

CH	Frequency(MHz)	Peak output power(dBm)
128	824.2	31.50
190	836.6	31.65
251	848.8	31.92

EGPRS

CH	Frequency(MHz)	Peak output power(dBm)
128	824.2	27.36
190	836.6	27.46
251	848.8	27.83

PCS1900

Limit

Power step	Nominal Peak output power (dBm)	Tolerance (dB)
0	30dBm(1W)*	± 2

*GSM Specification – ETSI EN 300 910 V8.5.1 (2000-11) Section 4.1

Measurement result

GSM

CH	Frequency(MHz)	Peak output power(dBm)
512	1850.2	28.27
661	1880.0	28.45
810	1909.8	28.43

GPRS

CH	Frequency(MHz)	Peak output power(dBm)
512	1850.2	28.27
661	1880.0	28.51
810	1909.8	28.46

EGPRS

CH	Frequency(MHz)	Peak output power(dBm)
512	1850.2	24.64
661	1880.0	24.86
810	1909.8	24.81

WCDMA Band II

Limit

Measurement result

CH	Frequency(MHz)	Peak output power(dBm)
9262	1852.4	24.60
9400	1880.0	24.68
9538	1907.6	24.50

WCDMA Band V

Limit

Measurement result

CH	Frequency(MHz)	Peak output power(dBm)
4132	826.4	24.92
4183	836.6	24.30
4233	846.6	24.62

B.1.3 Radiated

B.1.3.1 Description

This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

B.1.3.2 Method of Measurement

The measurements procedures in TIA-603C-2004 are used.

1. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (P_{in}) is applied to the input of the dipole, and the power received (P_r) at the chamber's probe antenna is recorded.
2. A "reference path loss" is established as $P_{in} + 2.15 - P_r$.
3. The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
4. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
5. The EUT is then put into pulse mode at its maximum power level .
6. "Gated mode" power measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.
7. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (P_{in}).
8. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15dBi$.

GSM 850-ERP

Measurement result

GSM

CH	Frequency(MHz)	Peak ERP(dBm)	Limit(dBm)
128	824.2	29.59	38.45
190	836.6	30.17	38.45
251	848.8	30.92	38.45

GPRS

CH	Frequency(MHz)	Peak ERP(dBm)	Limit(dBm)
128	824.2	29.72	38.45
190	836.6	30.23	38.45
251	848.8	30.88	38.45

EGPRS

CH	Frequency(MHz)	Peak ERP(dBm)	Limit(dBm)
128	824.2	28.31	38.45
190	836.6	28.91	38.45
251	848.8	29.69	38.45

PCS1900-EIRP

Measurement result

GSM

CH	Frequency(MHz)	Peak EIRP(dBm)	Limit(dBm)
512	1850.2	24.68	33.00
661	1880.0	24.98	33.00
810	1909.8	24.39	33.00

GPRS

CH	Frequency(MHz)	Peak EIRP(dBm)	Limit(dBm)
512	1850.2	23.77	33.00
661	1880.0	23.85	33.00
810	1909.8	24.30	33.00

EGPRS

CH	Frequency(MHz)	Peak EIRP(dBm)	Limit(dBm)
512	1850.2	23.25	33.00
661	1880.0	23.91	33.00
810	1909.8	23.49	33.00

WCDMA Band II-EIRP

Measurement result

CH	Frequency(MHz)	Peak EIRP(dBm)	Limit(dBm)
9262	1852.40	15.59	33.00
9400	1880.00	15.33	33.00
9538	1907.60	14.41	33.00

WCDMA Band V-ERP

Measurement result

CH	Frequency(MHz)	Peak ERP(dBm)	Limit(dBm)
4132	826.40	19.42	38.45
4183	836.60	19.72	38.45
4233	846.60	19.33	38.45

B.2 EMISSION LIMIT

B.2.1 Measurement Method

The measurements procedures in TIA-603C-2004 are used.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the PCS1900 band ,GSM850 band, WCDMA Band II band and WCDMA Band V band.

The procedure of radiated spurious emissions is as follows:

a) Pre-calibration


With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as,
 $RSE = R_x \text{ (dBuV)} + CL \text{ (dB)} + SA \text{ (dB)} + \text{Gain (dBi)} - 107 \text{ (dBuV to dBm)}$

The SA is calibrated using following setup.

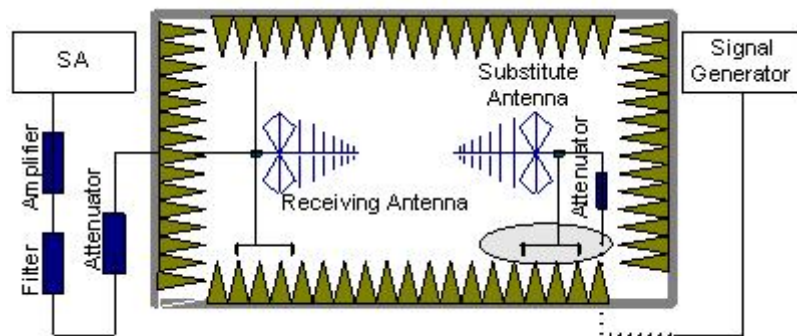

b) EUT test

EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

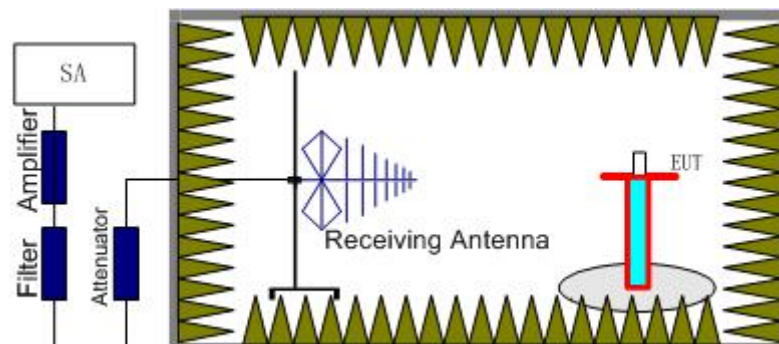

B.2.2 Measurement Limit

Sec. 24.238 Emission Limits.

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P , in Watts) by at least $43+10\log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

B.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS band (1850.2 MHz, 1880 MHz and 1909.8 MHz) ,GSM850 band (824.2MHz, 836.6MHz, 848.8MHz) ,WCDMA Band II band (1852.40 MHz ,1880.0 MHz and 1907.6 MHz)and WCDMA Band V band(826.40 MHz, 836.60 MHz and 846.60 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900 ,GSM850, WCDMA Band II and WCDMA Band V into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.


NOTE: The spurious emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels.

GSM 850

B.2.3.1 RADIATED SPURIOUS EMISSIONS-Channel 128: 30MHz –1GHz

Radiated spurious emission limit :-13dBm.


NOTE: peak above the limit line is the Carrier frequency @ ch-128

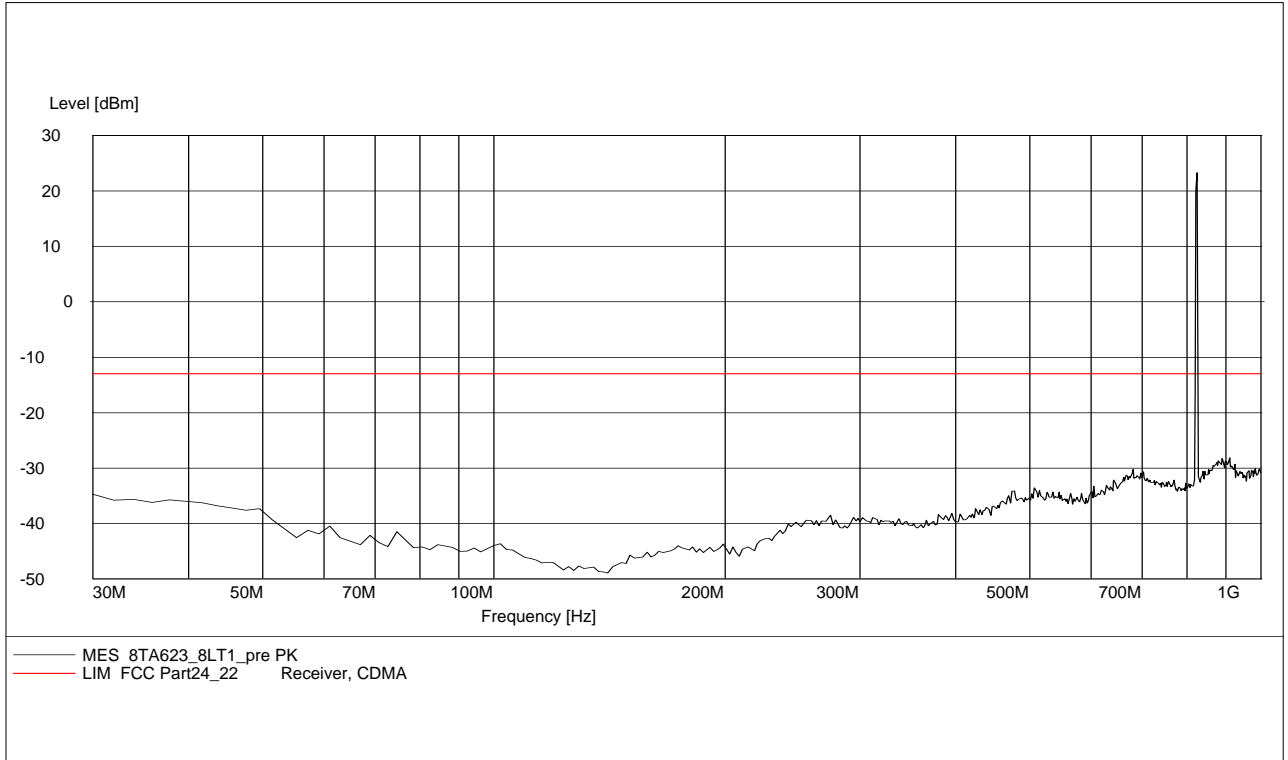

B.2.3.2 RADIATED SPURIOUS EMISSIONS-Channel 190: 30MHz – 1GHz

Radiated spurious emission limit :-13dBm.


NOTE: peak above the limit line is the Carrier frequency @ ch-190

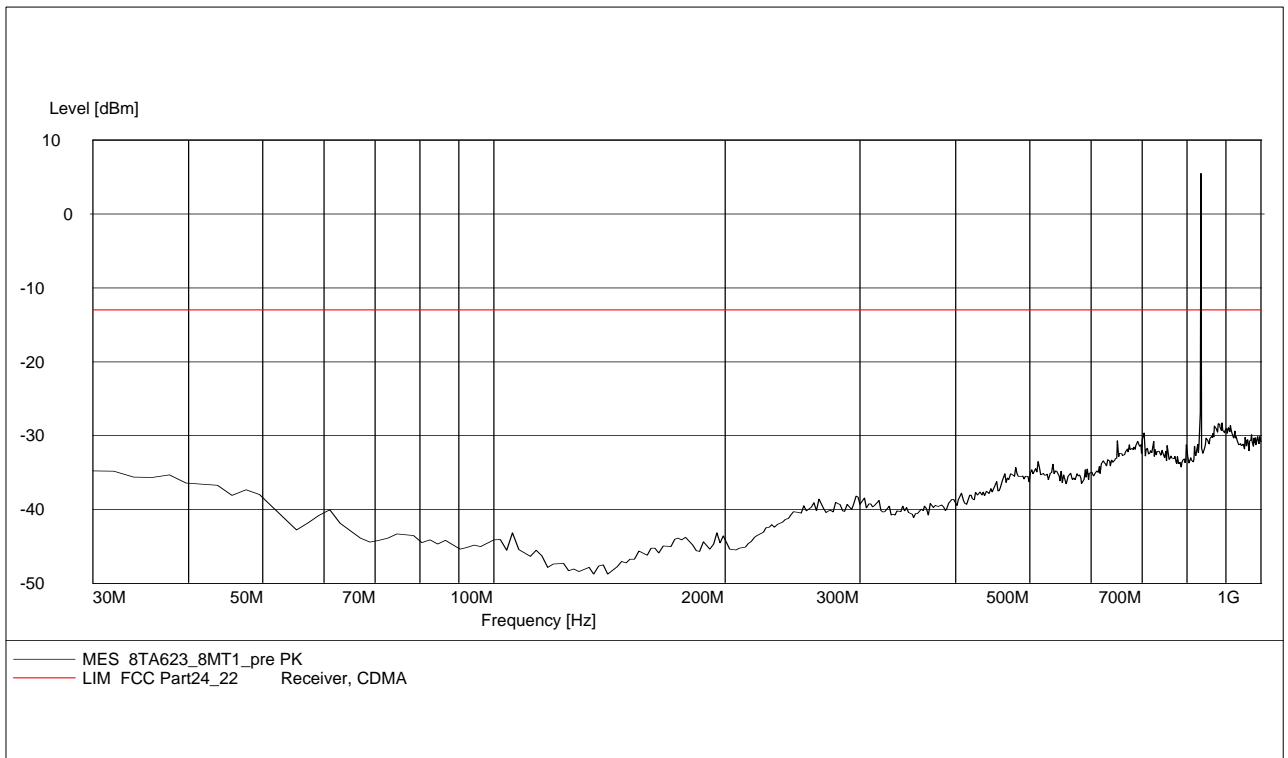

B.2.3.3 RADIATED SPURIOUS EMISSIONS-Channel 251: 30MHz – 1GHz


Radiated spurious emission limit :-13dBm.

NOTE: peak above the limit line is the Carrier frequency @ ch-251

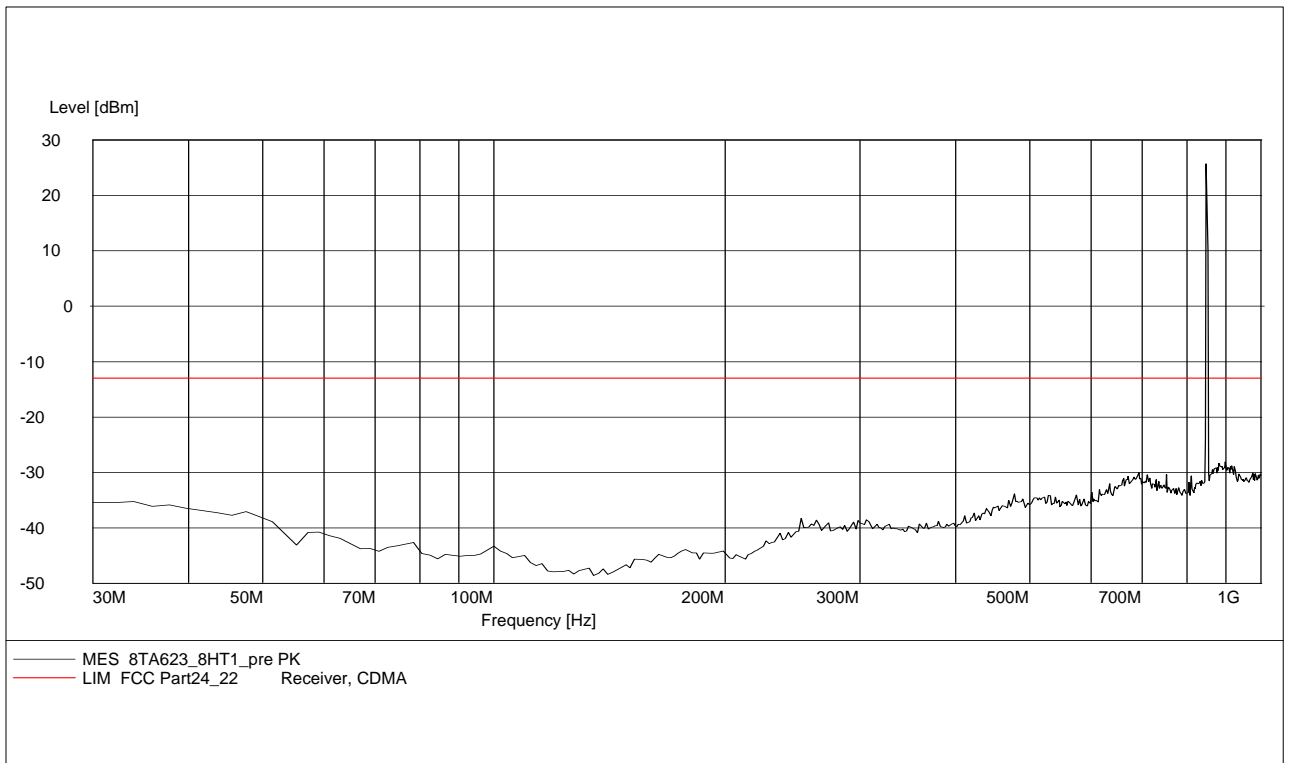


B.2.3.4 RADIATED SPURIOUS EMISSIONS-Channel 128: 1GHz – 10GHz

Radiated spurious emission limit :-13dBm.

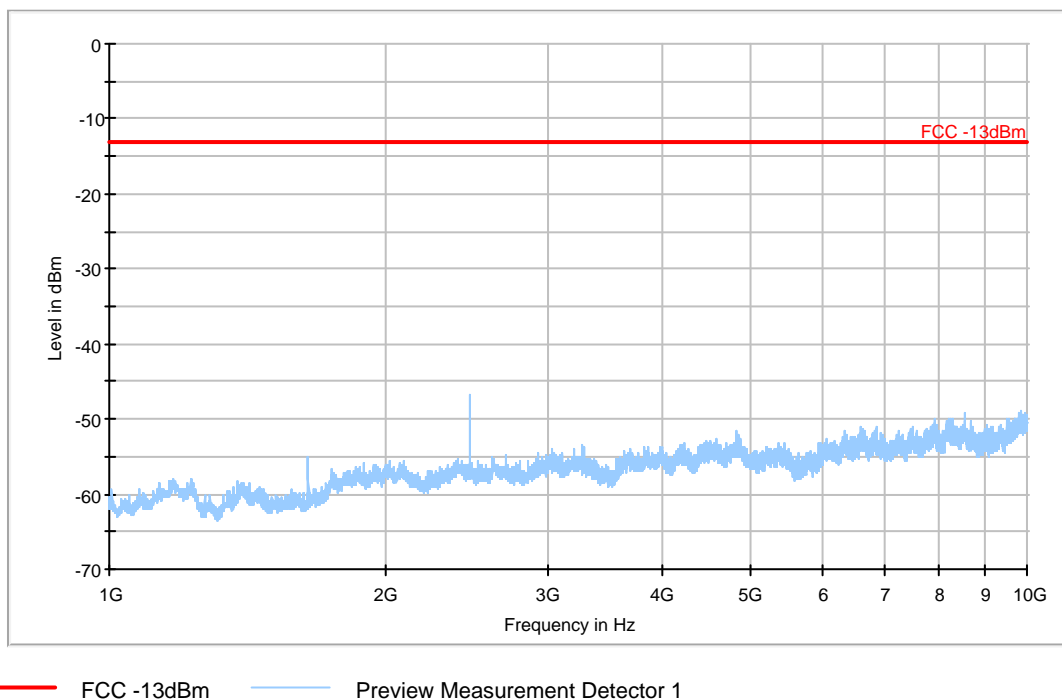


B.2.3.5 RADIATED SPURIOUS EMISSIONS-Channel 190: 1GHz – 10GHz
Radiated spurious emission limit :-13dBm.

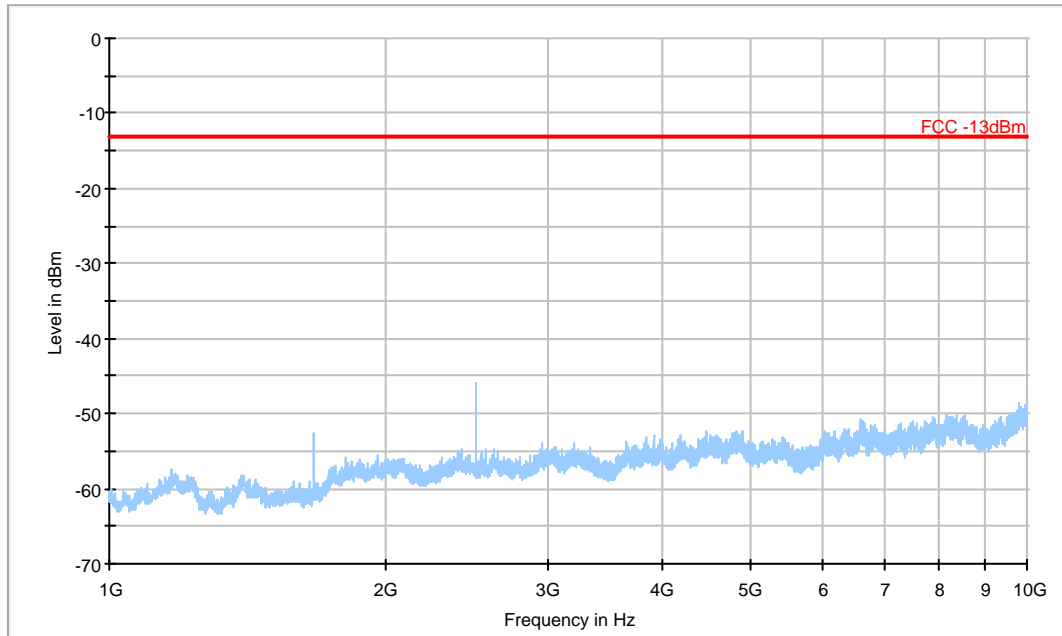


— FCC -13dBm — Preview Measurement Detector 1

B.2.3.6 RADIATED SPURIOUS EMISSIONS-Channel 251: 1GHz – 10GHz
Radiated spurious emission limit :-13dBm.

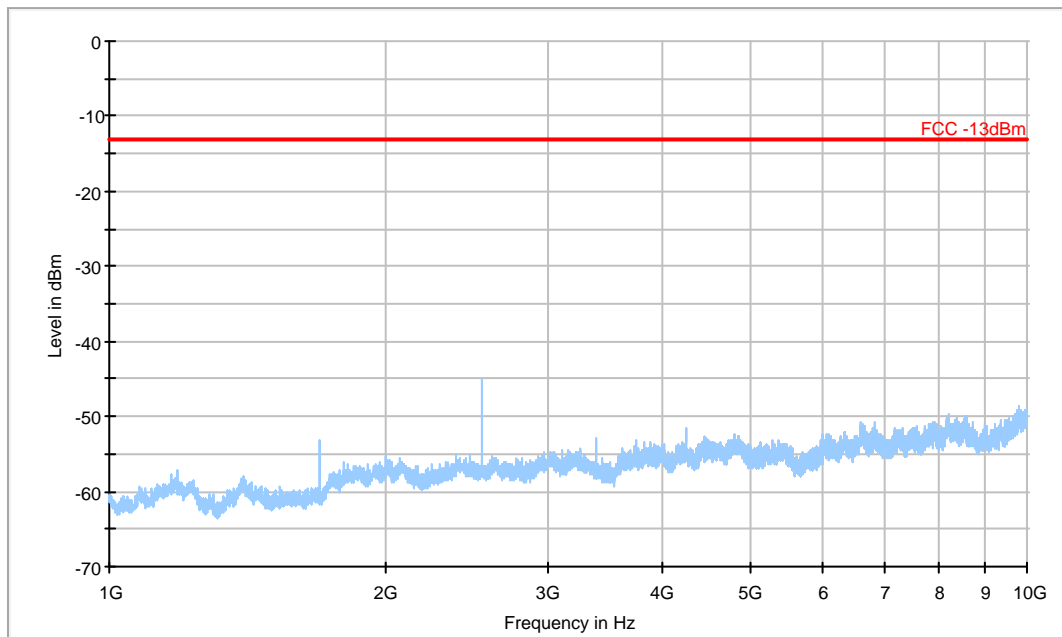


— FCC -13dBm — Preview Measurement Detector 1

B.2.3.7 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 30MHz – 1GHz
Radiated spurious emission limit :-13dBm.

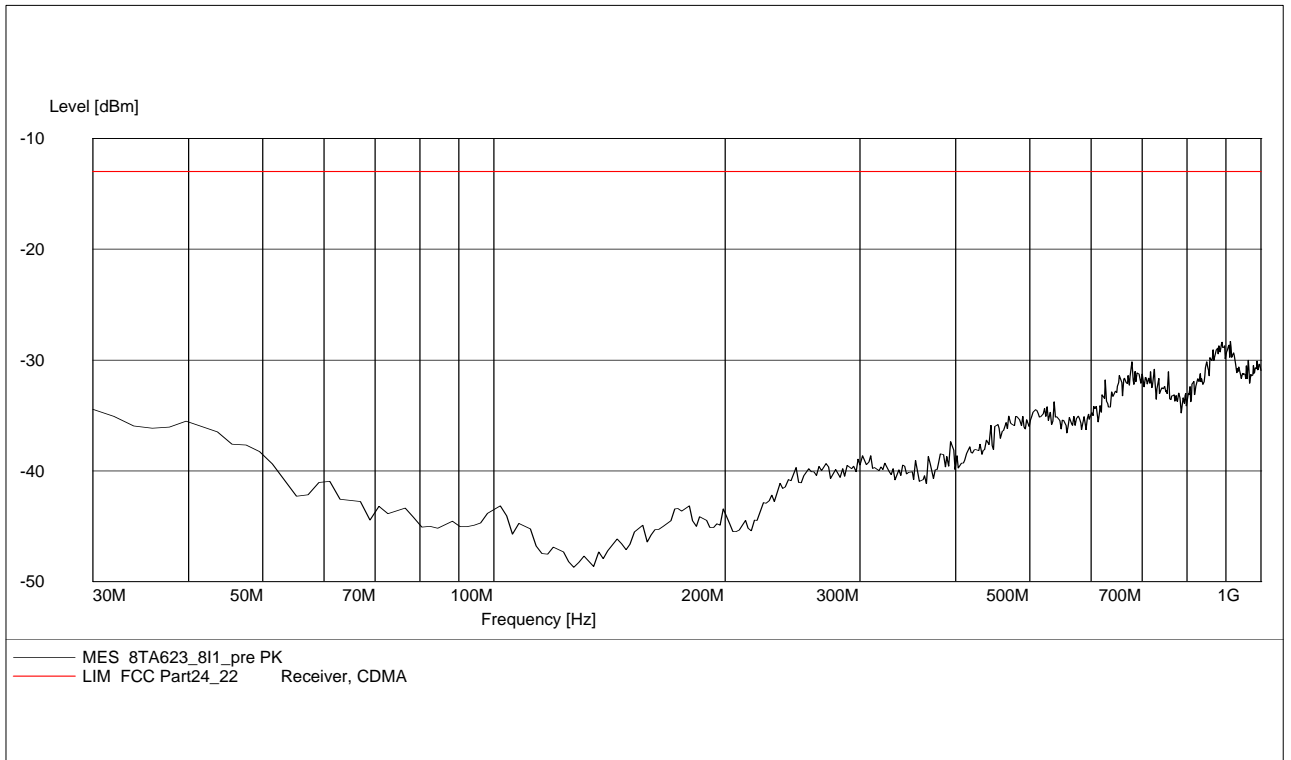


B.2.3.8 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 1GHz – 10GHz
Radiated spurious emission limit :-13dBm.

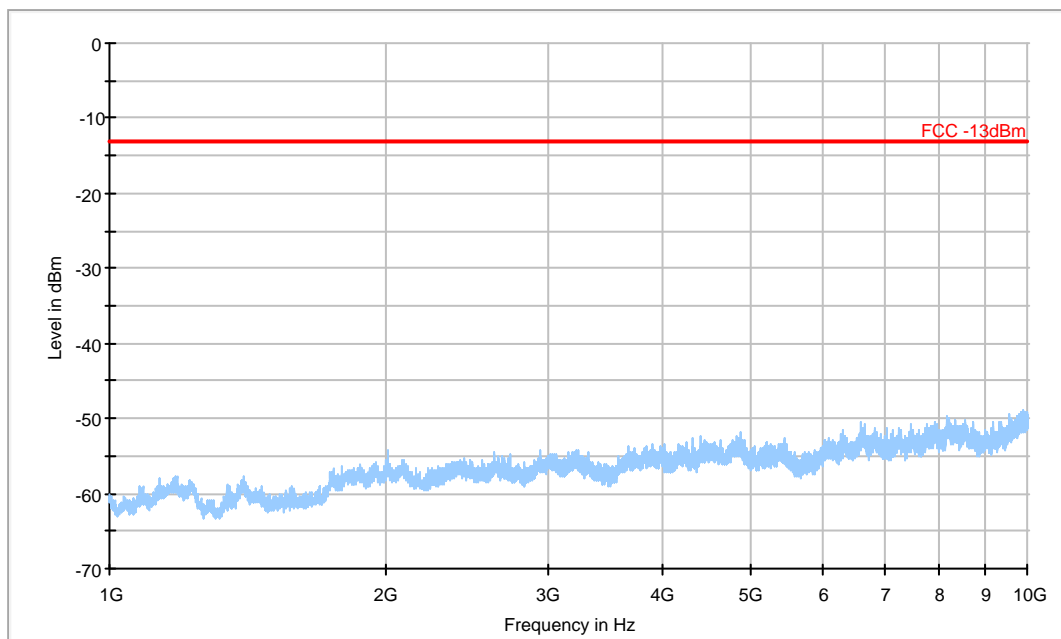


— FCC -13dBm — Preview Measurement Detector 1

B.2.3.9 RADIATED SPURIOUS EMISSIONS-EUT in Traffic Mode: 9KHz – 30MHz(Valid for 3 channels)

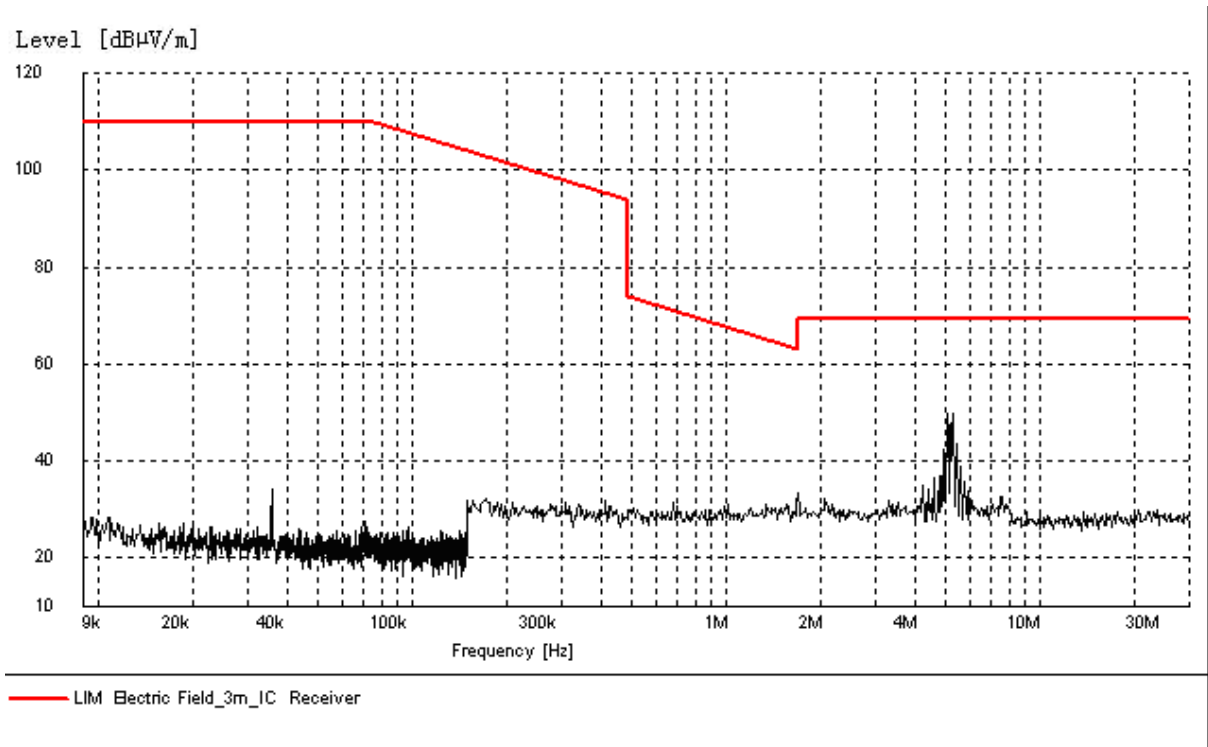

B.2.3.10 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 9KHz – 30MHz(Valid for 3 channels)

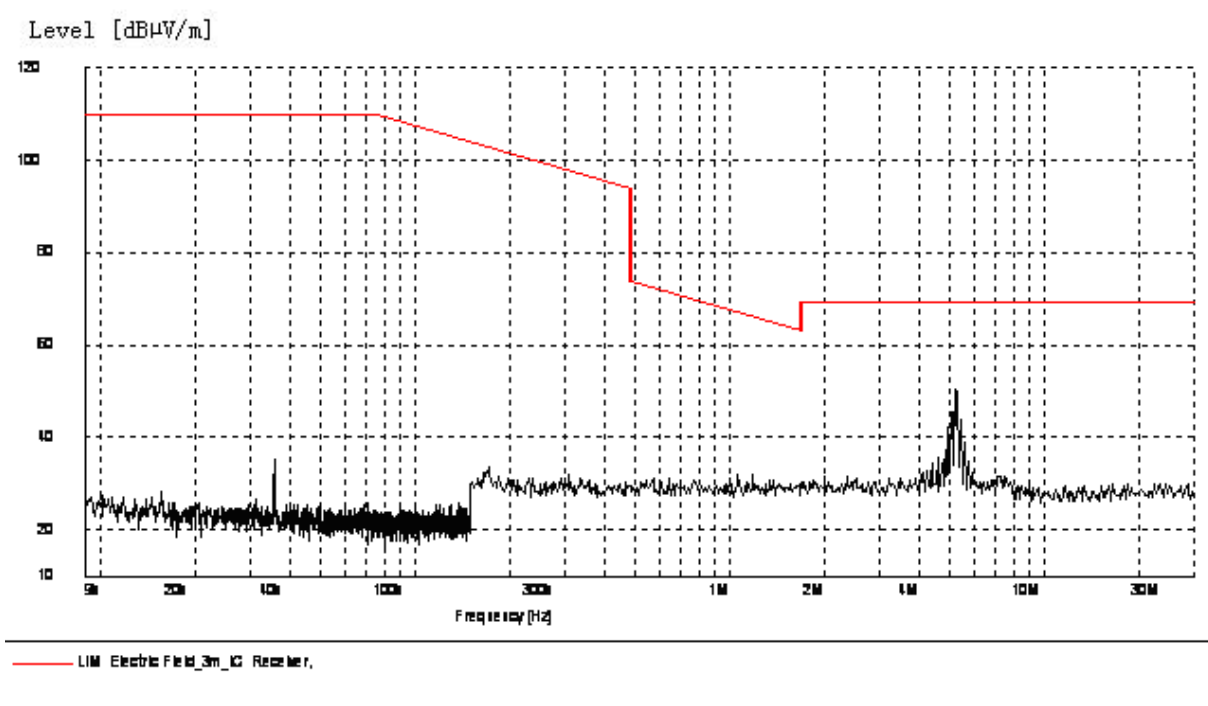


PCS 1900

B.2.3.11 RADIATED SPURIOUS EMISSIONS-Channel 512: 30MHz – 2GHz

Radiated spurious emission limit :-13dBm.


NOTE: peak above the limit line is the Carrier frequency @ ch-512

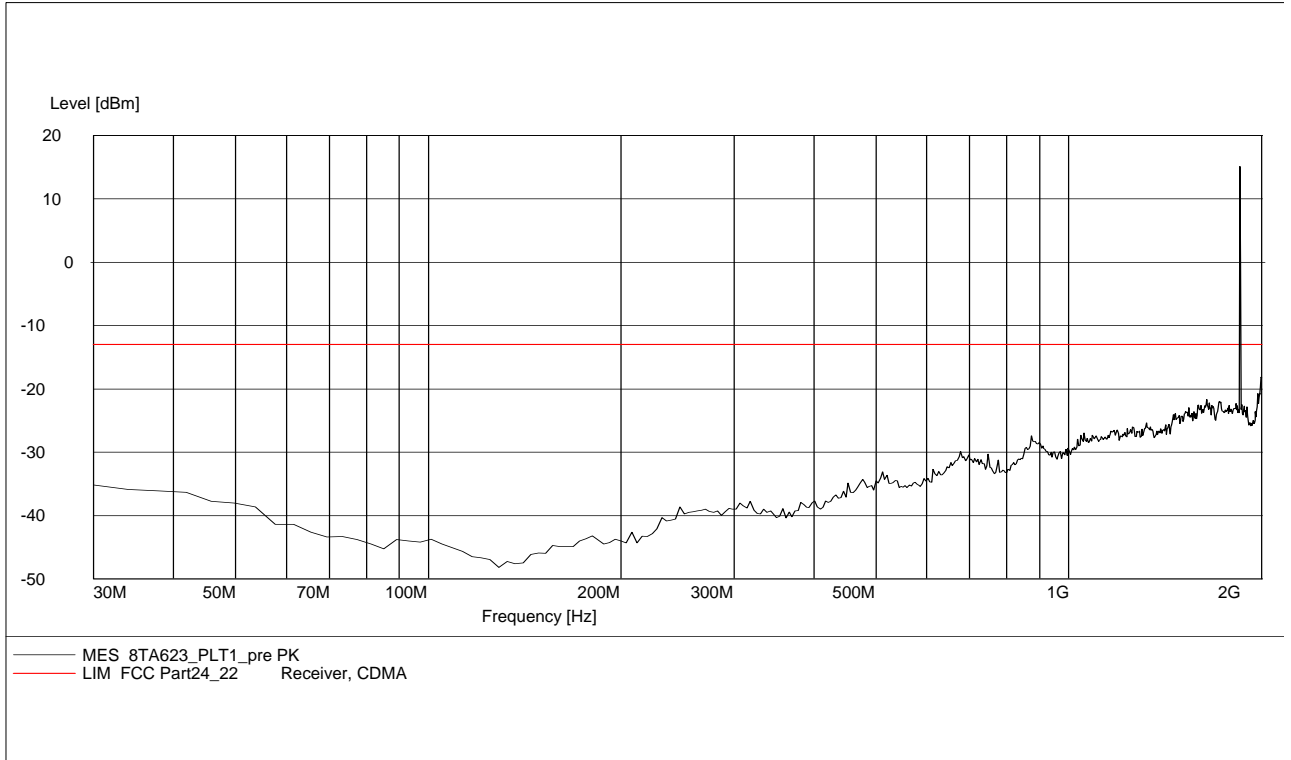

B.2.3.12 RADIATED SPURIOUS EMISSIONS-Channel 661: 30MHz – 2GHz

Radiated spurious emission limit :-13dBm.


NOTE: peak above the limit line is the Carrier frequency @ ch-661

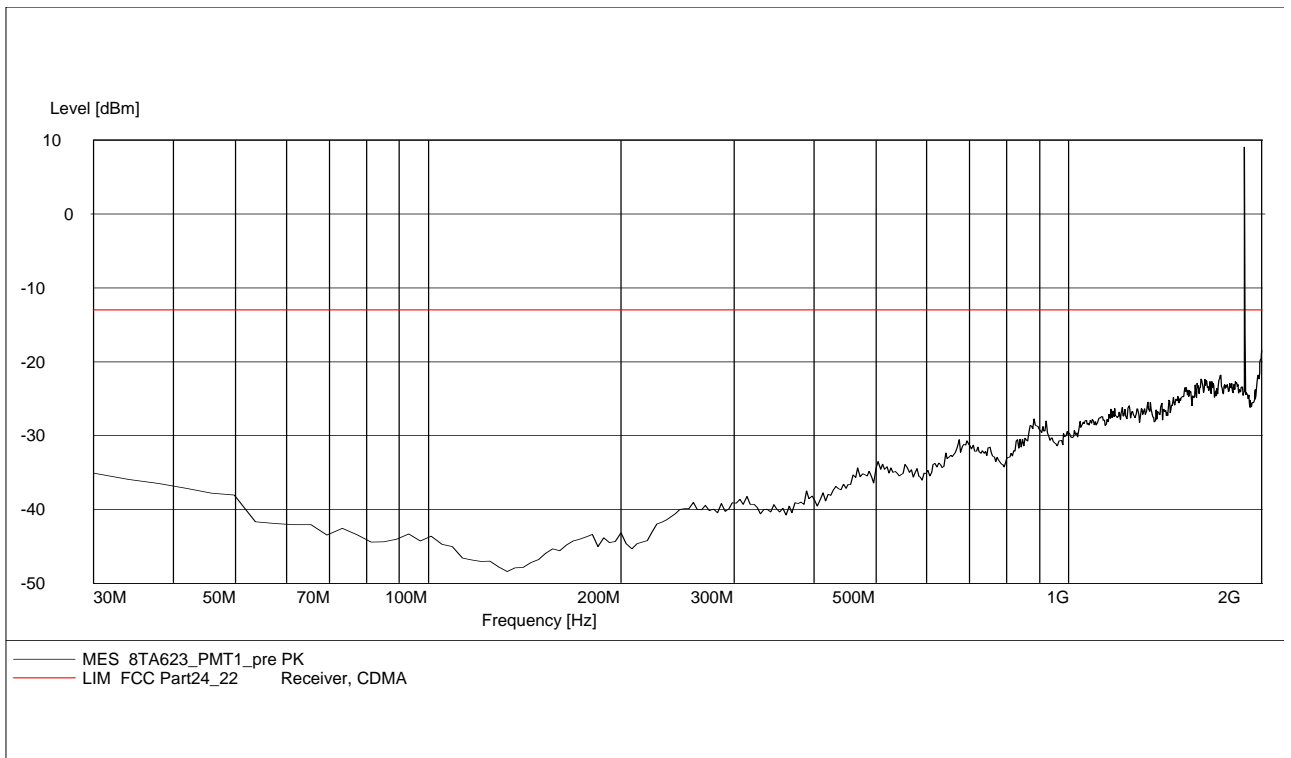

B.2.3.13 RADIATED SPURIOUS EMISSIONS-Channel 810: 30MHz – 2GHz


Radiated spurious emission limit :-13dBm.

NOTE: peak above the limit line is the Carrier frequency @ ch-810

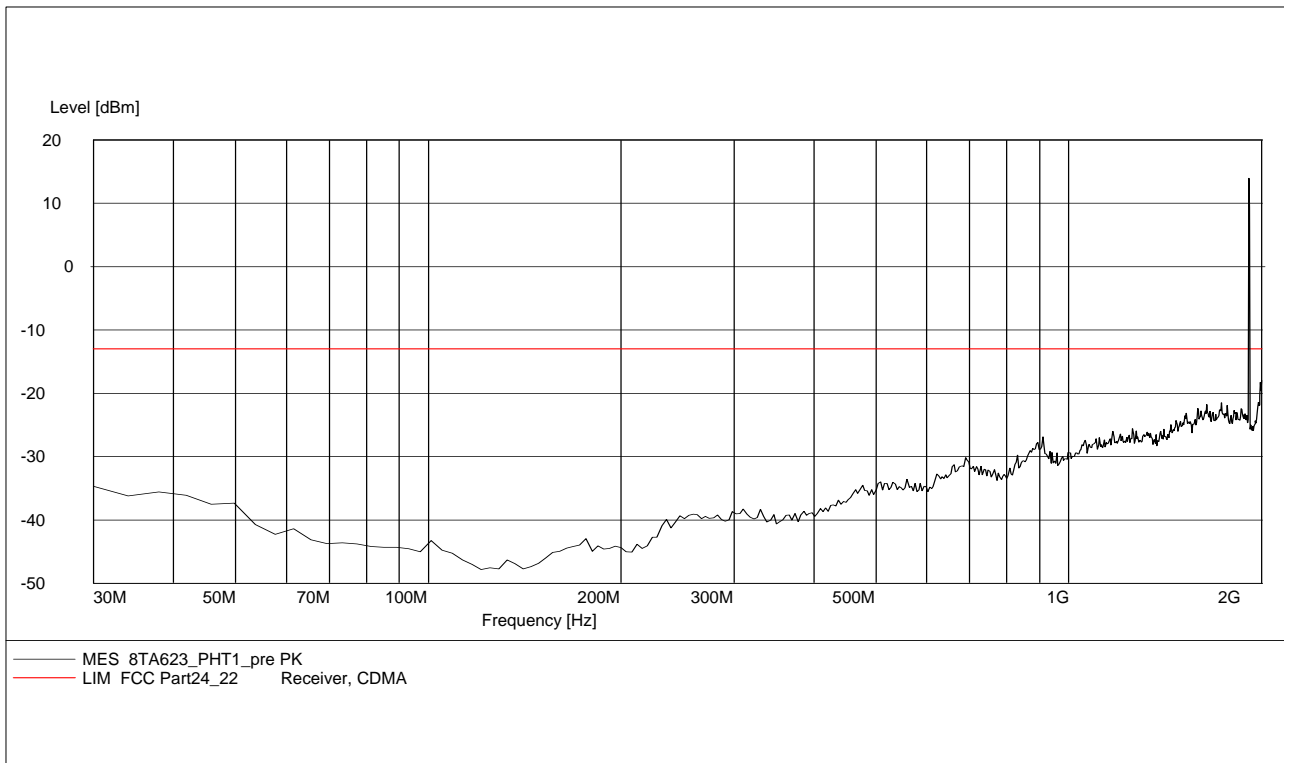


B.2.3.14 RADIATED SPURIOUS EMISSIONS-Channel 512: 2GHz – 18GHz

Radiated spurious emission limit :-13dBm.

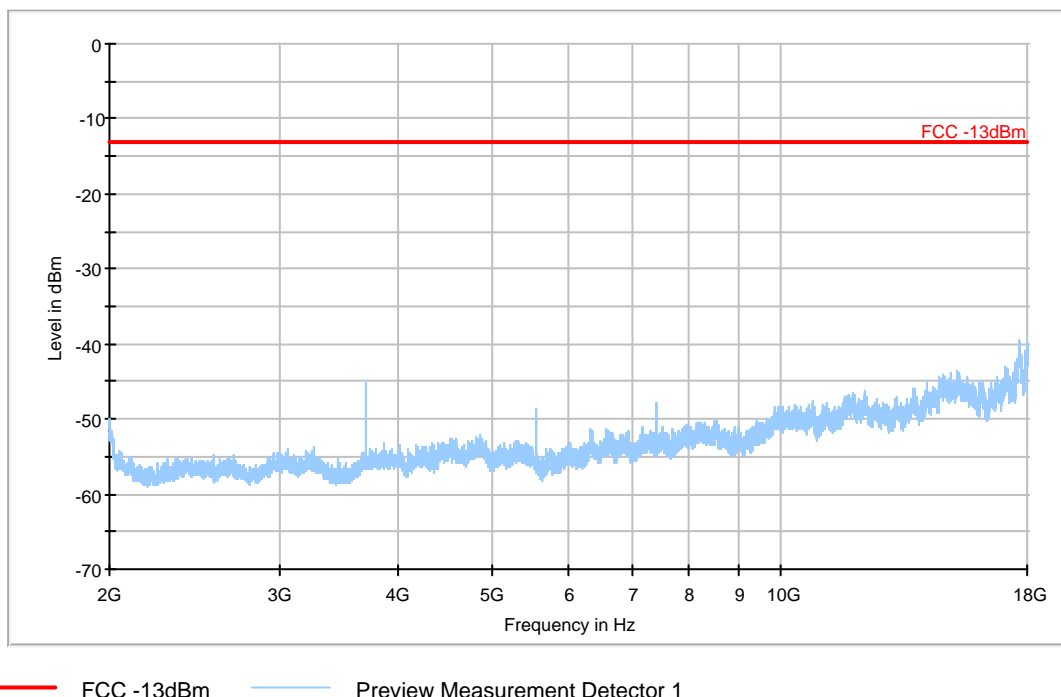


B.2.3.15 RADIATED SPURIOUS EMISSIONS-Channel 661: 2GHz – 18GHz
Radiated spurious emission limit :-13dBm.

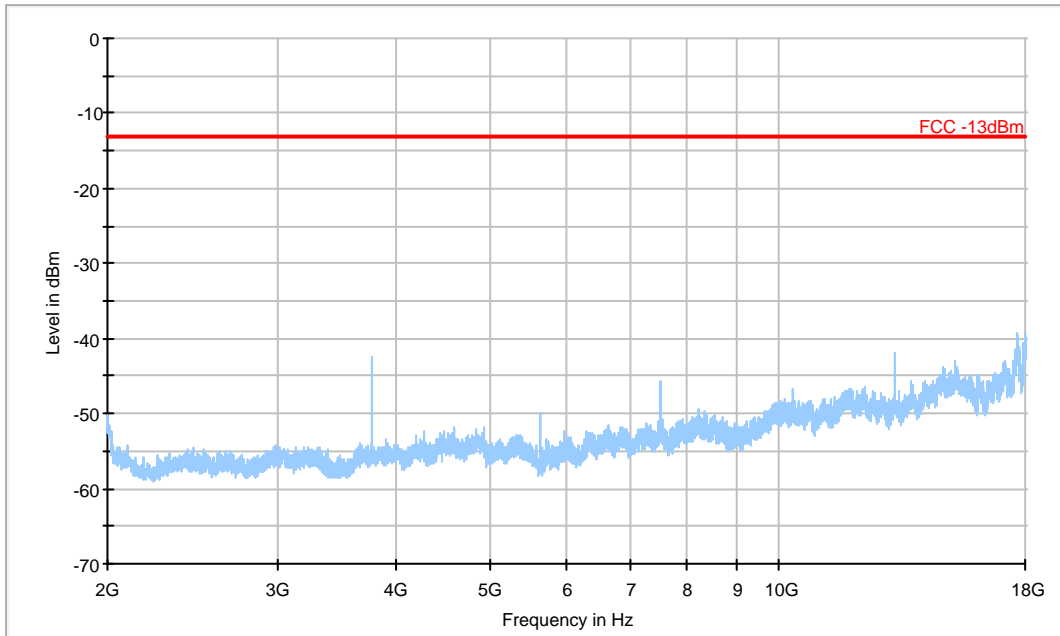

— FCC -13dBm — Preview Measurement Detector 1

B.2.3.16 RADIATED SPURIOUS EMISSIONS-Channel 810: 2GHz – 18GHz
Radiated spurious emission limit :-13dBm.

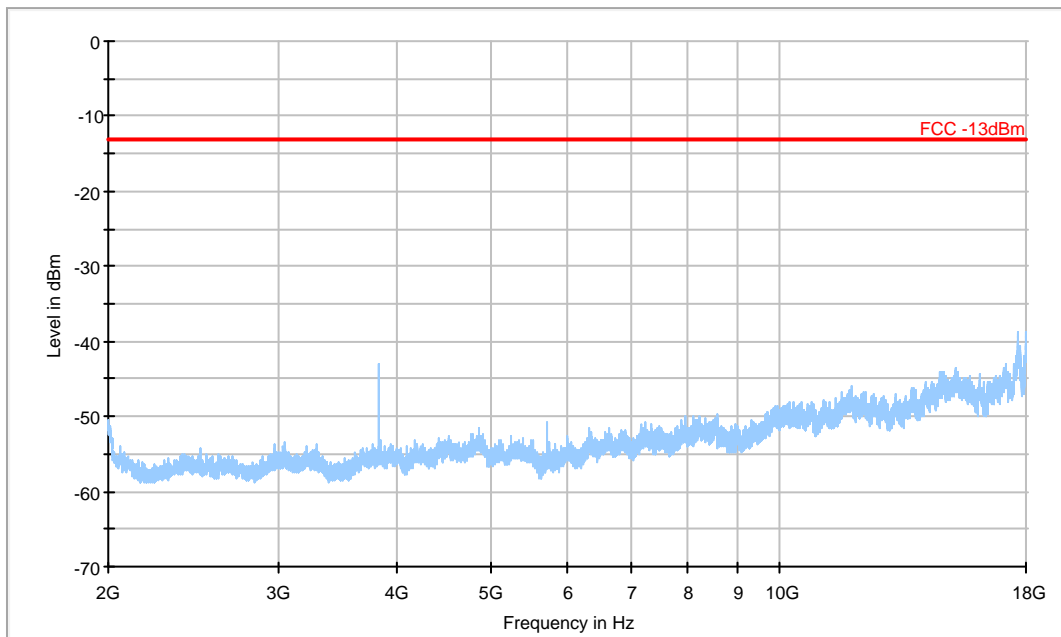


— FCC -13dBm — Preview Measurement Detector 1

B.2.3.17 Radiated spurious emission (18GHz-20GHz)


Radiated spurious emission limit :-13dBm.

Note: This plot is valid for low, mid & high channels. It is same as the floor noise.

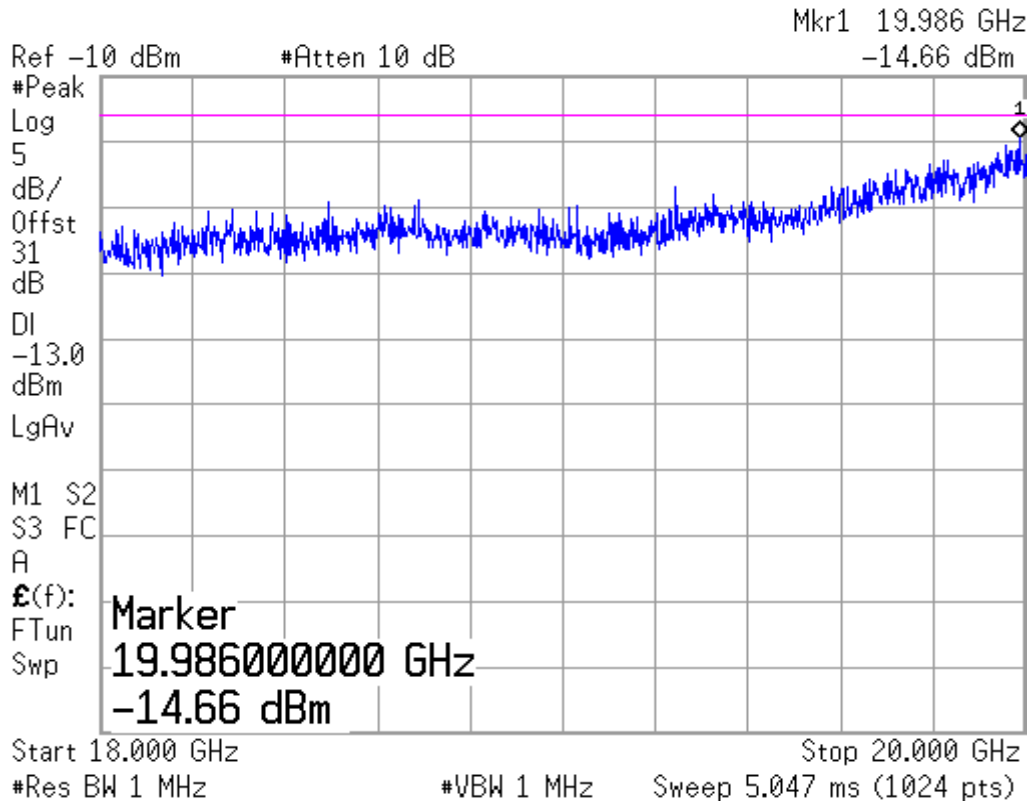


B.2.3.18 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 30MHz – 2GHz

Radiated spurious emission limit :-13dBm.

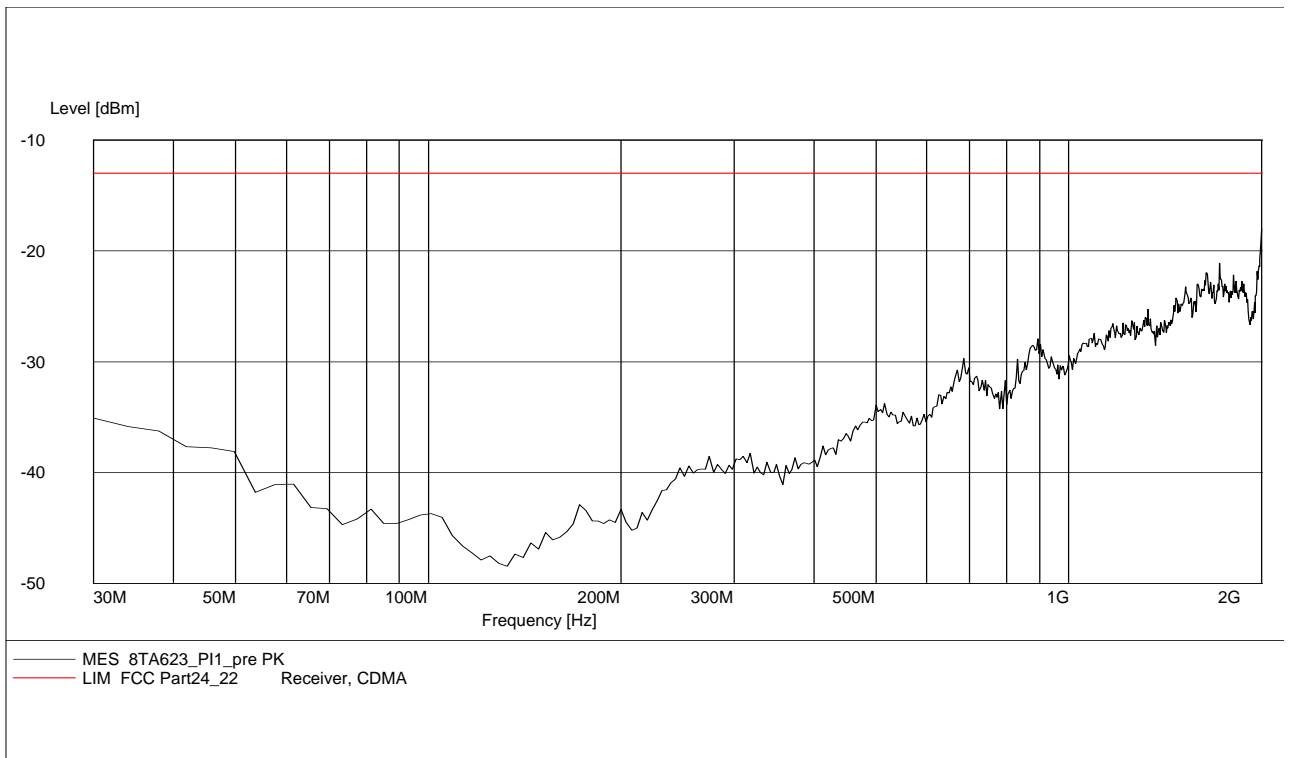


B.2.3.19 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 2GHz – 18GHz
Radiated spurious emission limit :-13dBm.

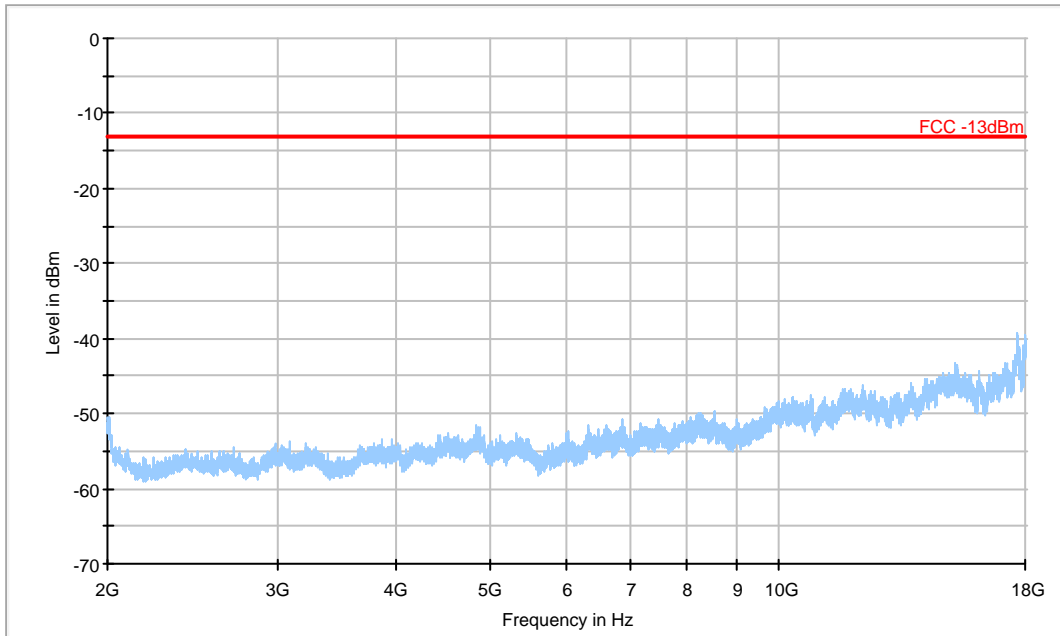


— FCC -13dBm — Preview Measurement Detector 1

B.2.3.20 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 18GHz – 20GHz
Radiated spurious emission limit :-13dBm.


Note: It is same as the floor noise.

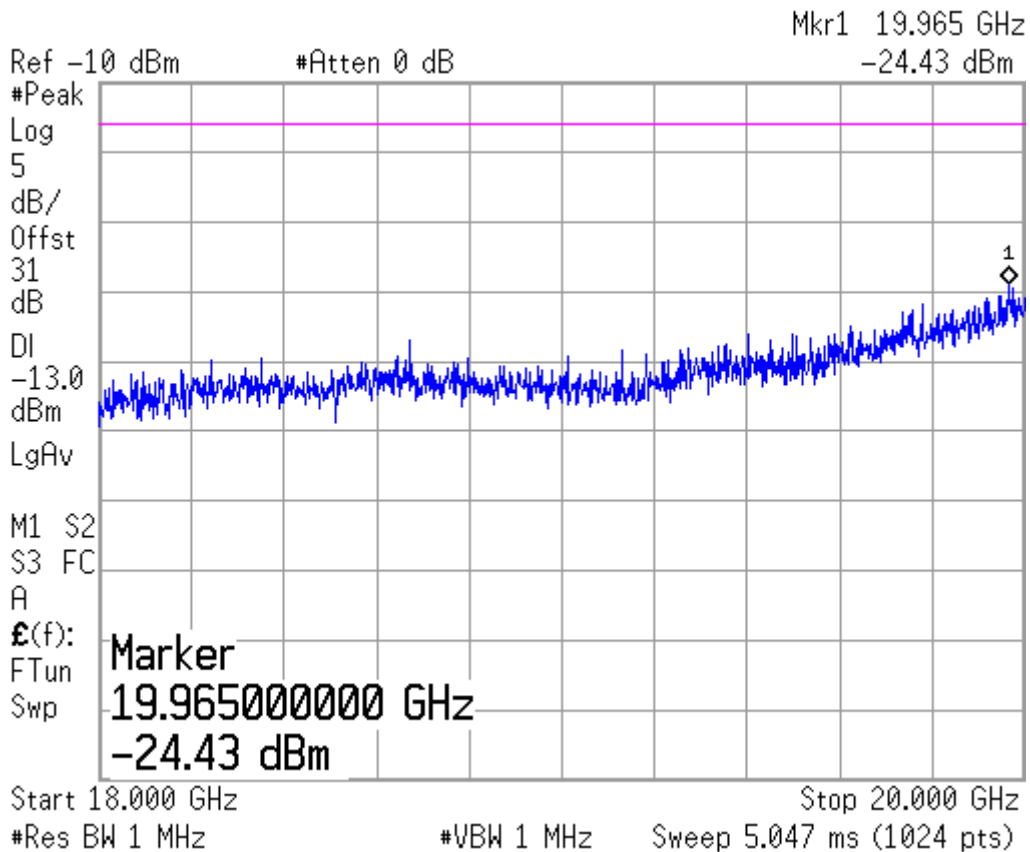

B.2.3.21 RADIATED SPURIOUS EMISSIONS-EUT in Traffic Mode: 9KHz – 30MHz(Valid for 3 channels)

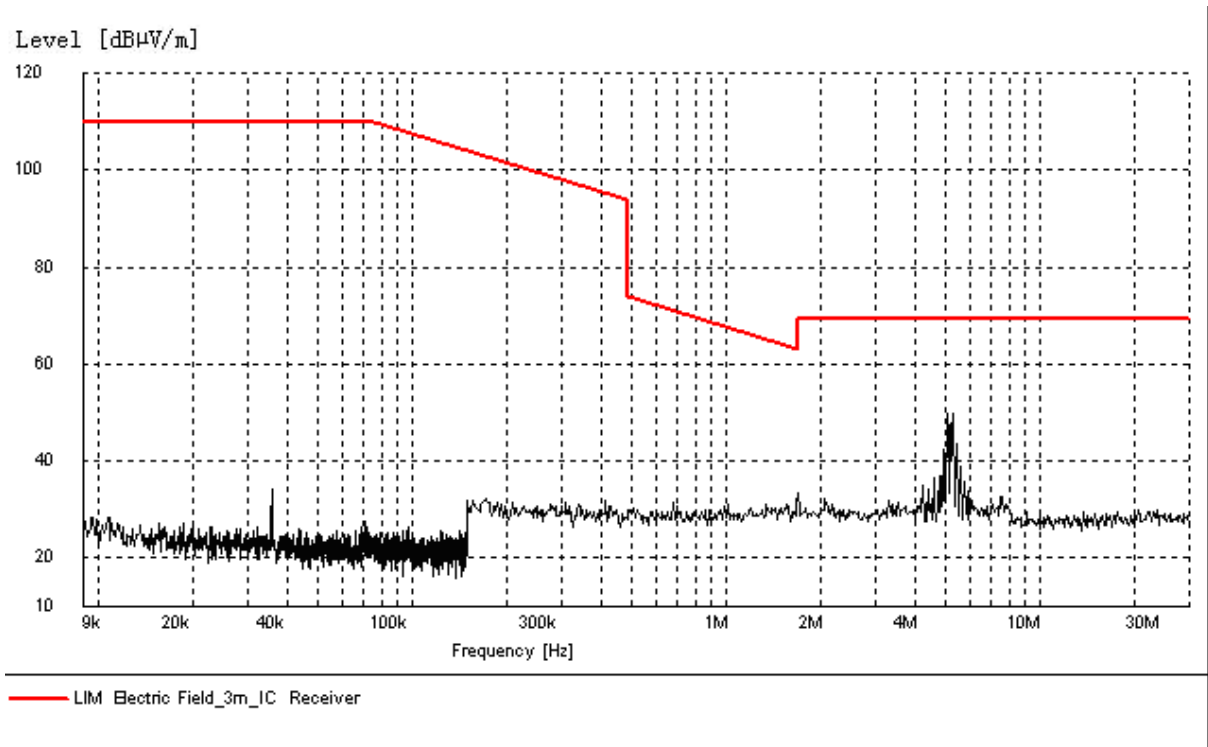

B.2.3.22 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 9KHz – 30MHz(Valid for 3 channels)

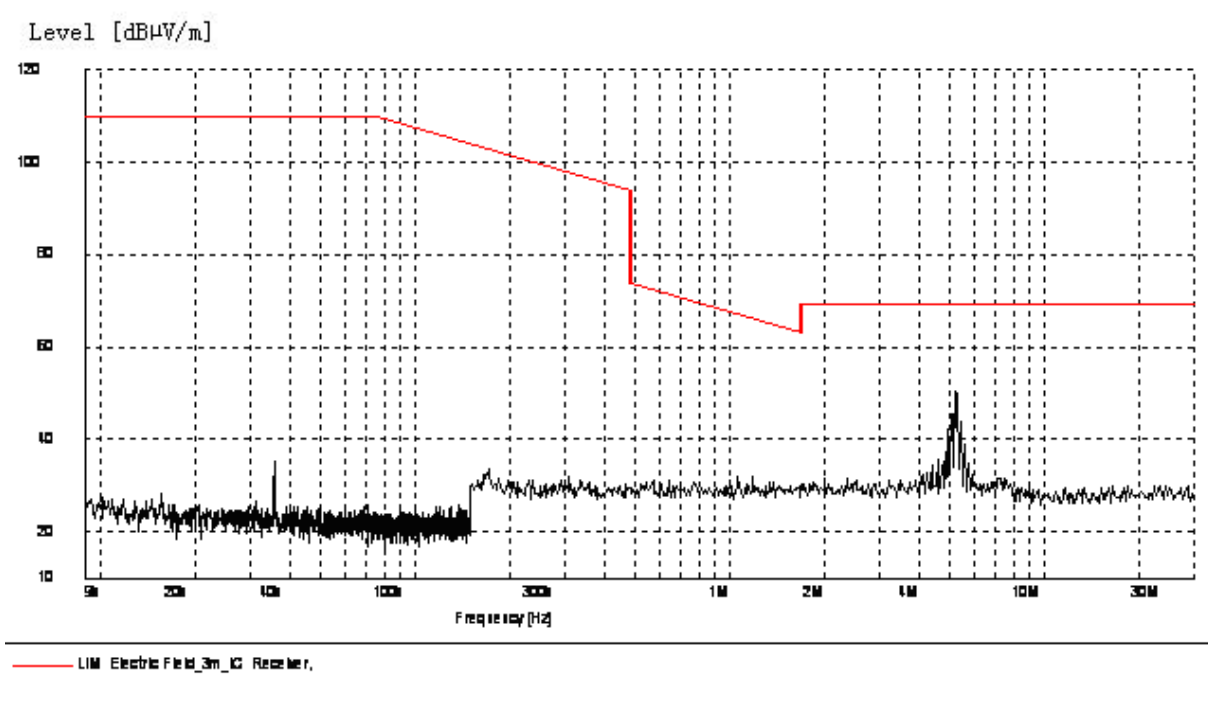


WCDMA Band II

B.2.3.23 RADIATED SPURIOUS EMISSIONS-Channel 9262: 30MHz – 2GHz

Radiated spurious emission limit :-13dBm.


NOTE: peak above the limit line is the Carrier frequency @ ch-1852.40

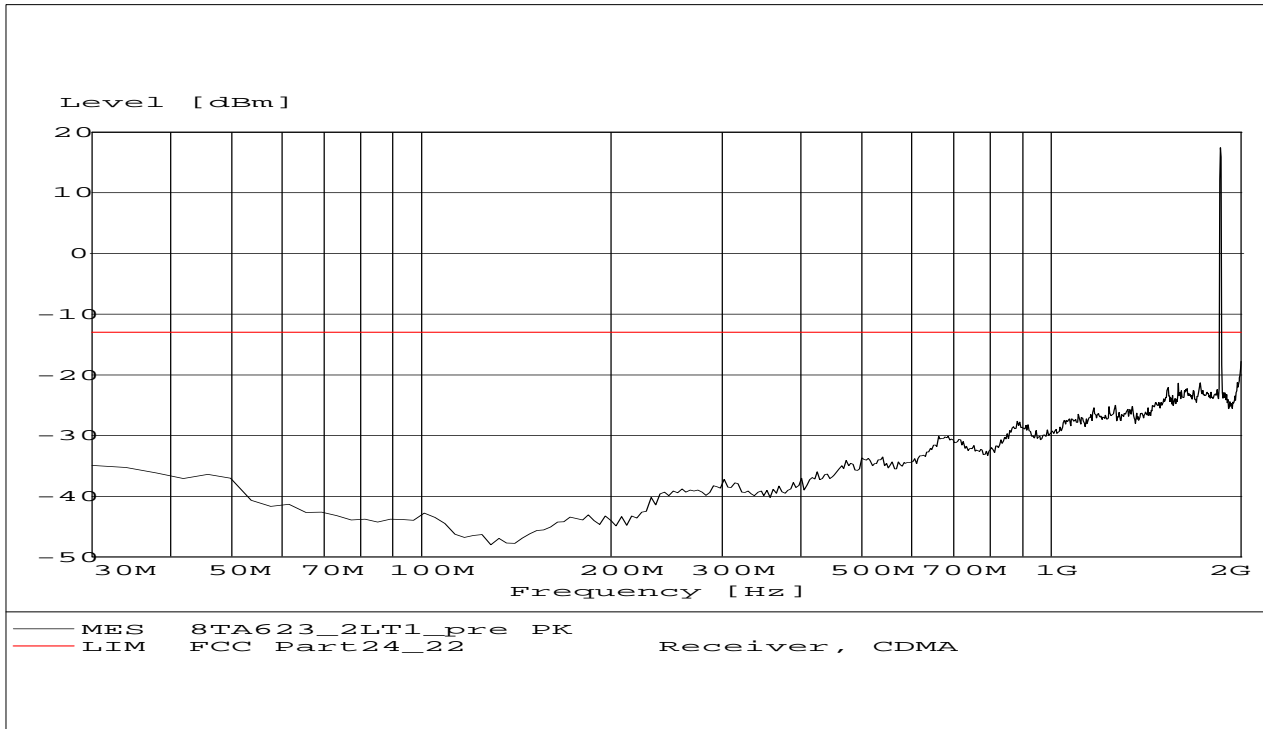

B.2.3.24 RADIATED SPURIOUS EMISSIONS-Channel 9400: 30MHz – 2GHz

Radiated spurious emission limit :-13dBm.


NOTE: peak above the limit line is the Carrier frequency @ ch-1880.00

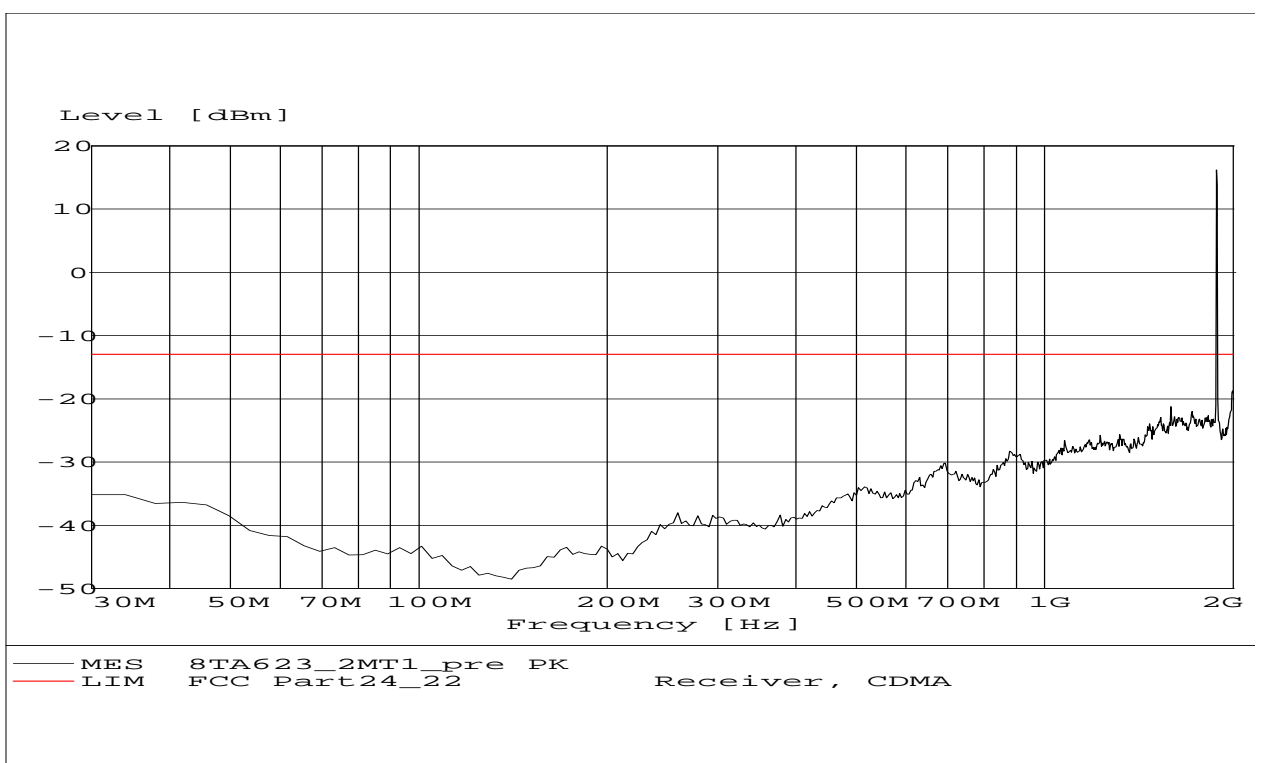

B.2.3.25 RADIATED SPURIOUS EMISSIONS-Channel 9538: 30MHz – 2GHz


Radiated spurious emission limit :-13dBm.

NOTE: peak above the limit line is the Carrier frequency @ ch-1907.60

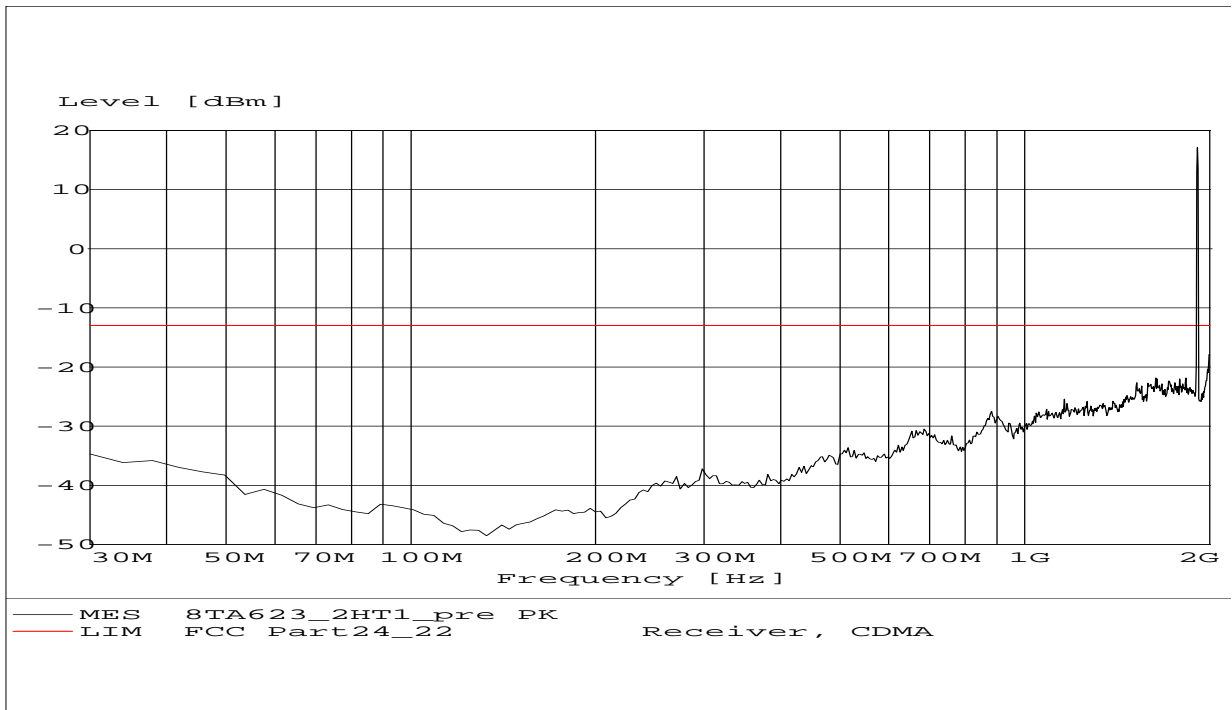


B.2.3.26 RADIATED SPURIOUS EMISSIONS-Channel 9262: 2GHz – 18GHz

Radiated spurious emission limit :-13dBm.

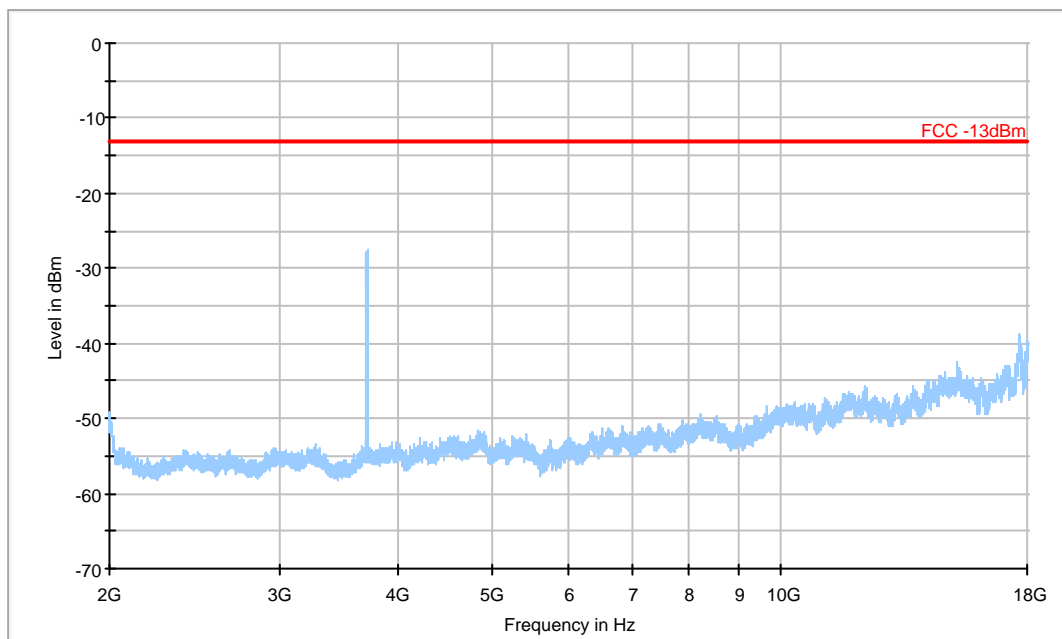


— FCC -13dBm — Preview Measurement Detector 1

B.2.3.27 RADIATED SPURIOUS EMISSIONS-Channel 9400: 2GHz – 18GHz
Radiated spurious emission limit :-13dBm.

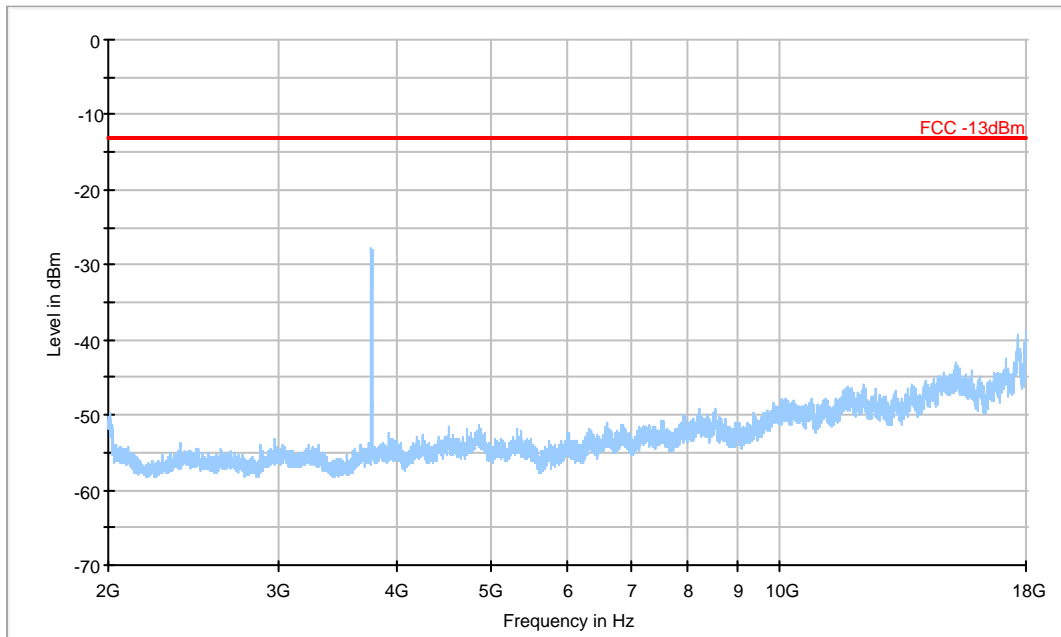

— FCC -13dBm — Preview Measurement Detector 1

B.2.3.28 RADIATED SPURIOUS EMISSIONS-Channel 9538: 2GHz – 18GHz
Radiated spurious emission limit :-13dBm.

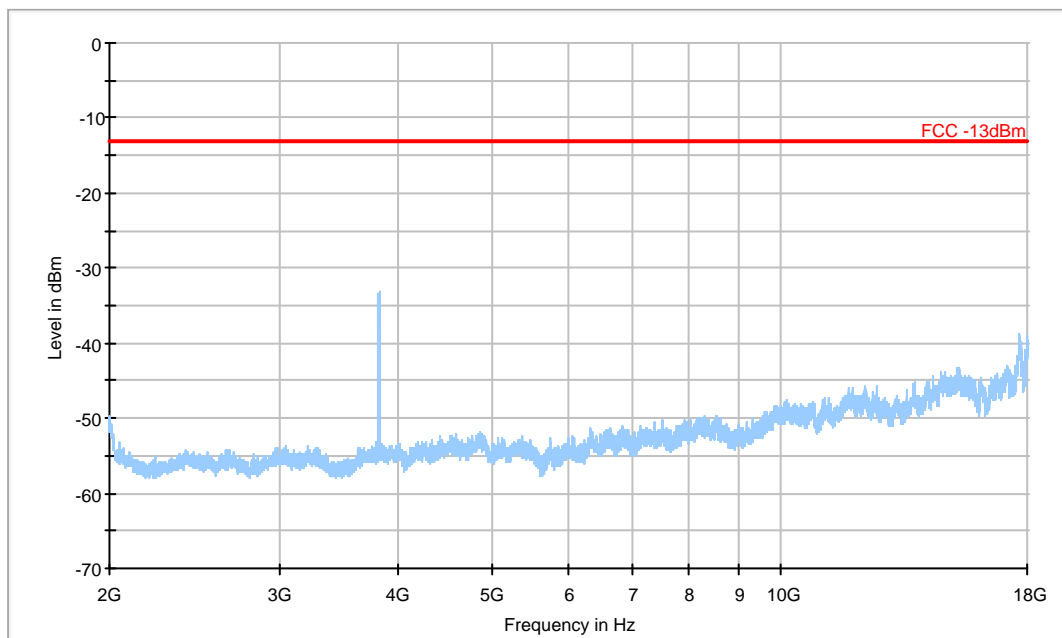


— FCC -13dBm — Preview Measurement Detector 1

B.2.3.29 Radiated spurious emission (18GHz-20GHz)


Radiated spurious emission limit :-13dBm.

Note: This plot is valid for low, mid & high channels. It is same as the floor noise.

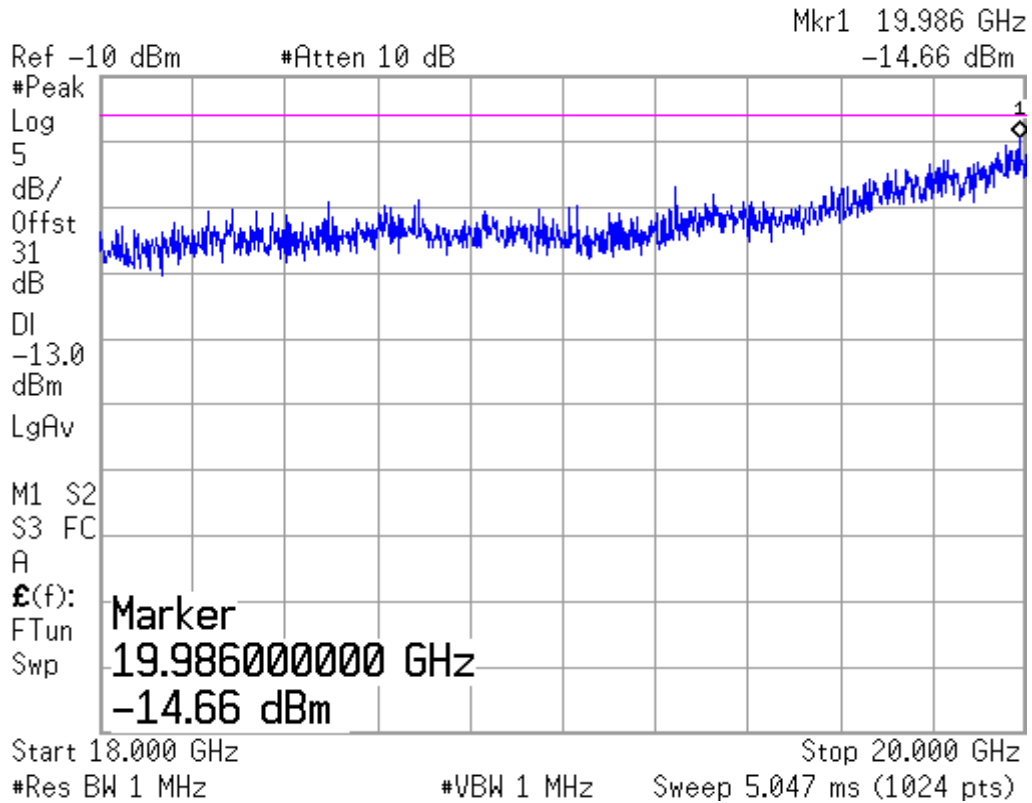


B.2.3.30 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 30MHz – 2GHz

Radiated spurious emission limit :-13dBm.

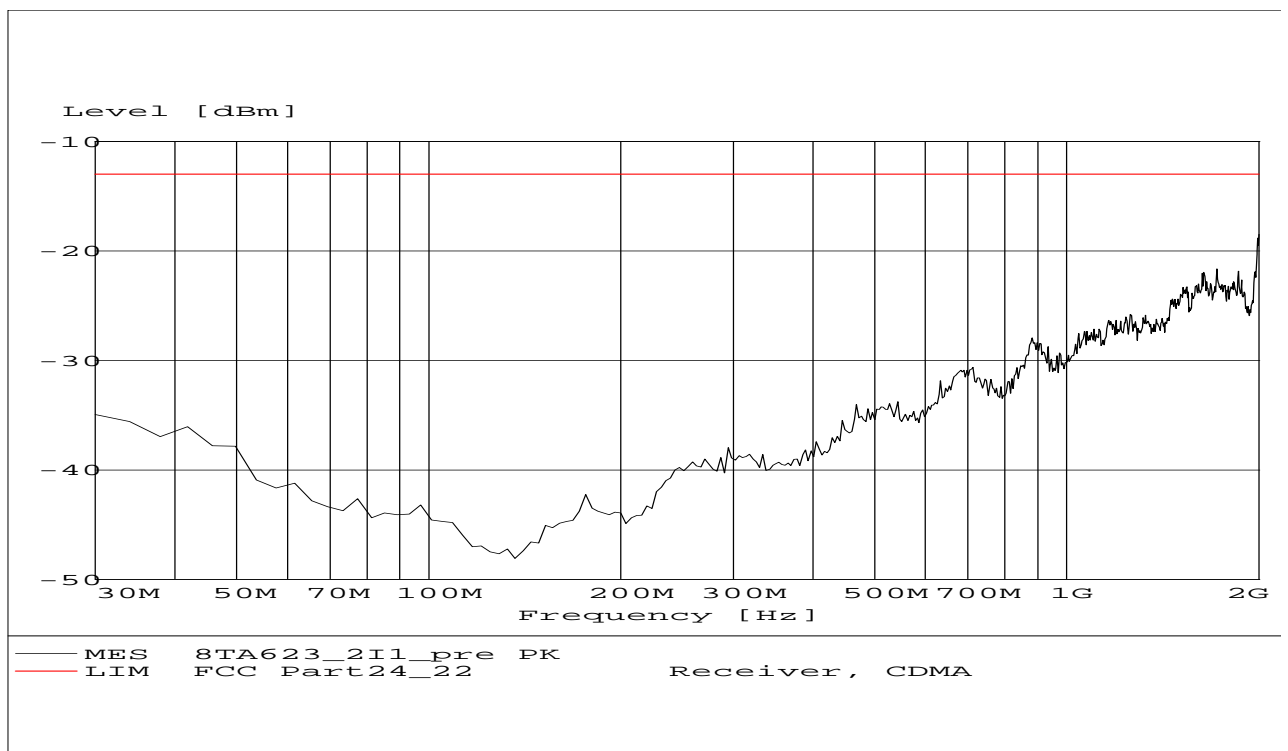


B.2.3.31 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 2GHz – 18GHz
Radiated spurious emission limit :-13dBm.

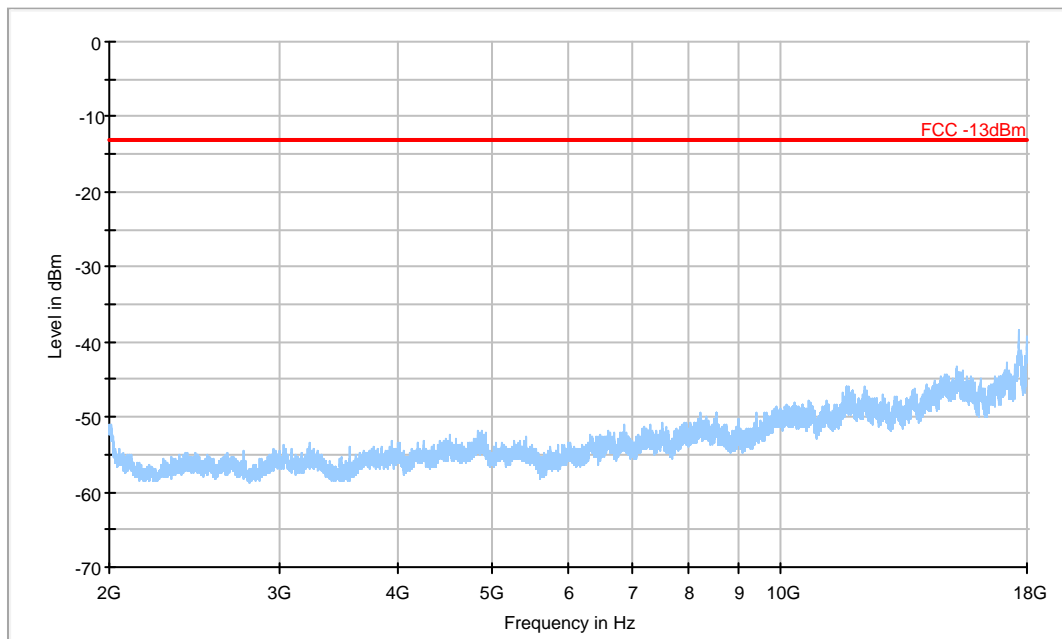


— FCC -13dBm — Preview Measurement Detector 1

B.2.3.32 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 18GHz – 20GHz
Radiated spurious emission limit :-13dBm.


Note: It is same as the floor noise.

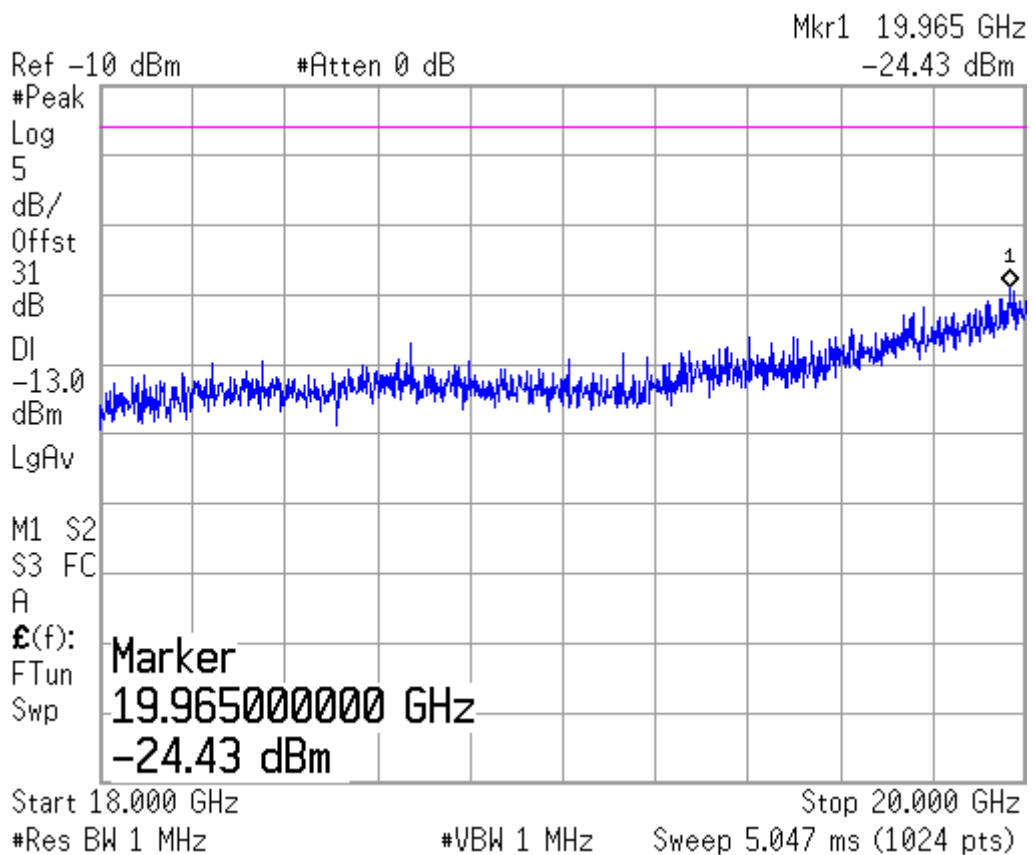

B.2.3.33 RADIATED SPURIOUS EMISSIONS-EUT in Traffic Mode: 9KHz – 30MHz(Valid for 3 channels)

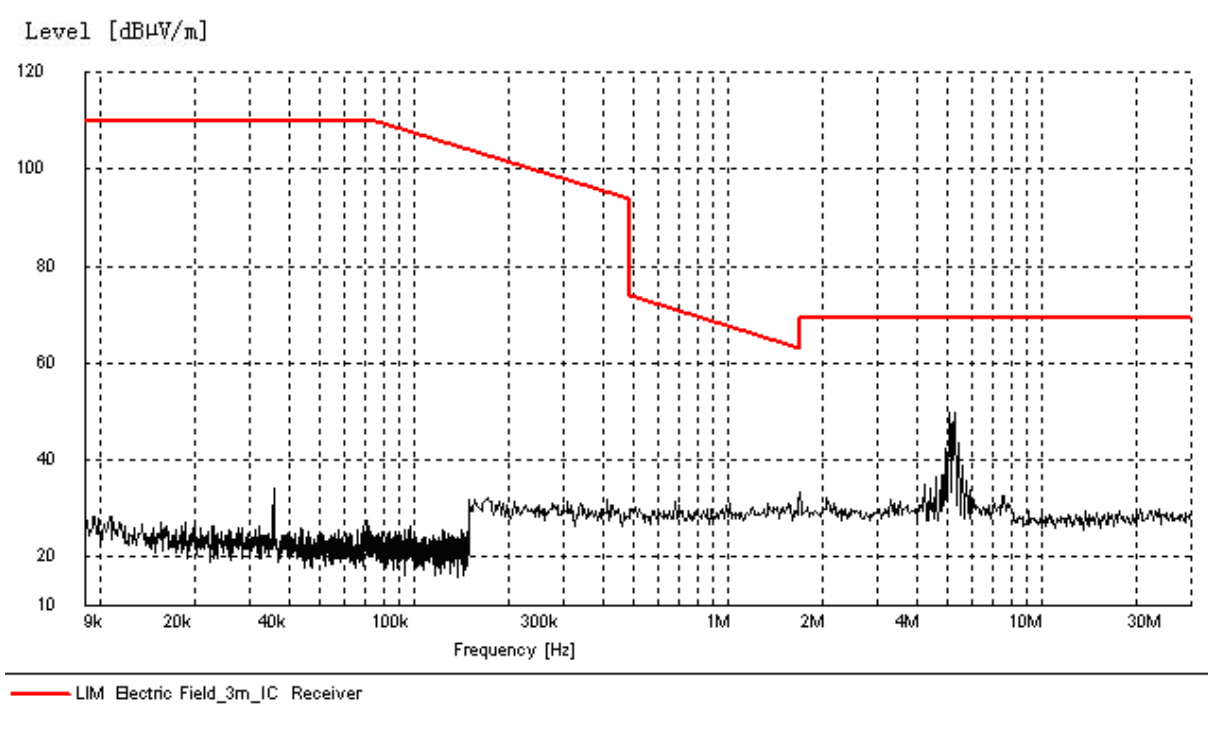

B.2.3.34 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 9KHz – 30MHz(Valid for 3 channels)

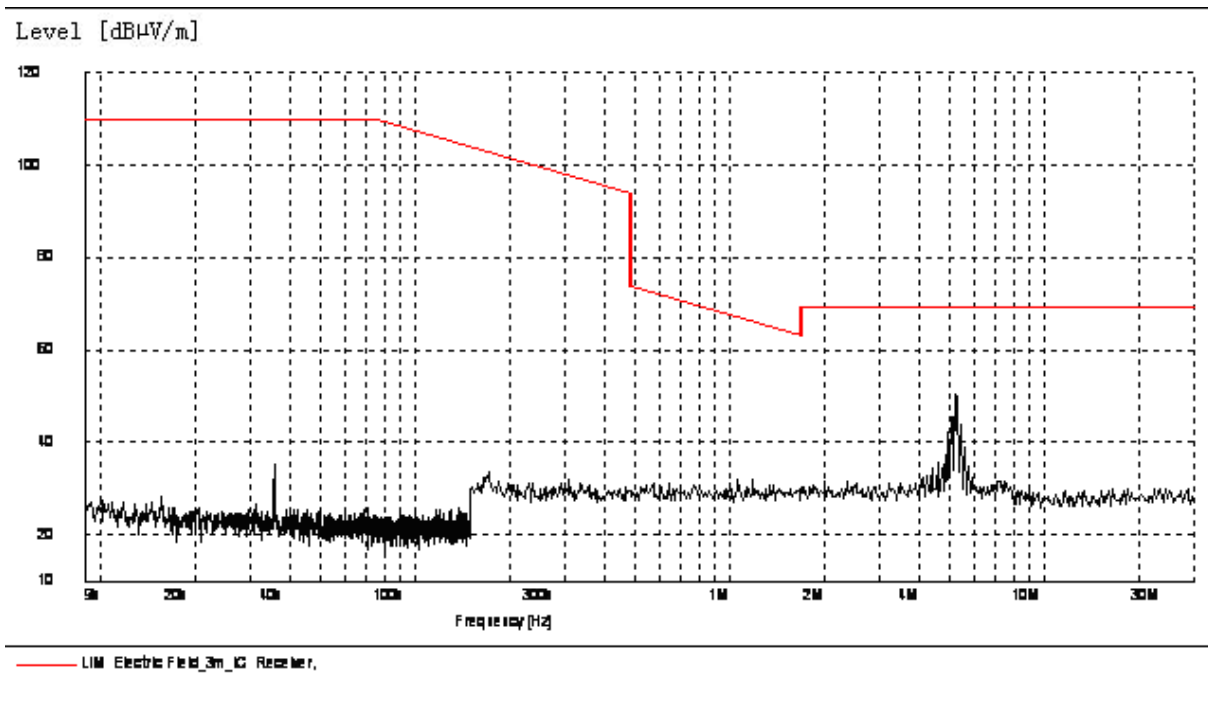


WCDMA Band V

B.2.3.35 RADIATED SPURIOUS EMISSIONS-Channel 4132: 30MHz – 1GHz

Radiated spurious emission limit :-13dBm.


NOTE: peak above the limit line is the Carrier frequency @ ch-826.40

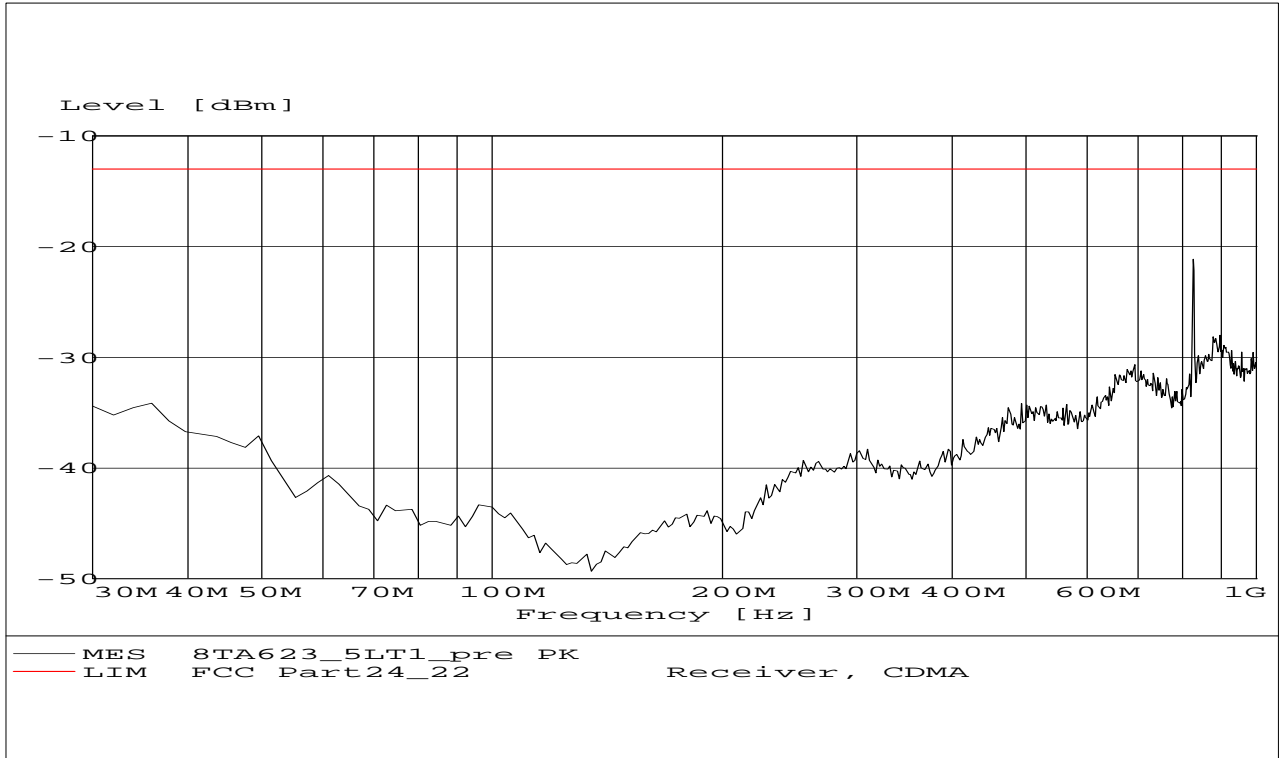

B.2.3.36 RADIATED SPURIOUS EMISSIONS-Channel 4183: 30MHz – 1GHz

Radiated spurious emission limit :-13dBm.


NOTE: peak above the limit line is the Carrier frequency @ ch-836.60

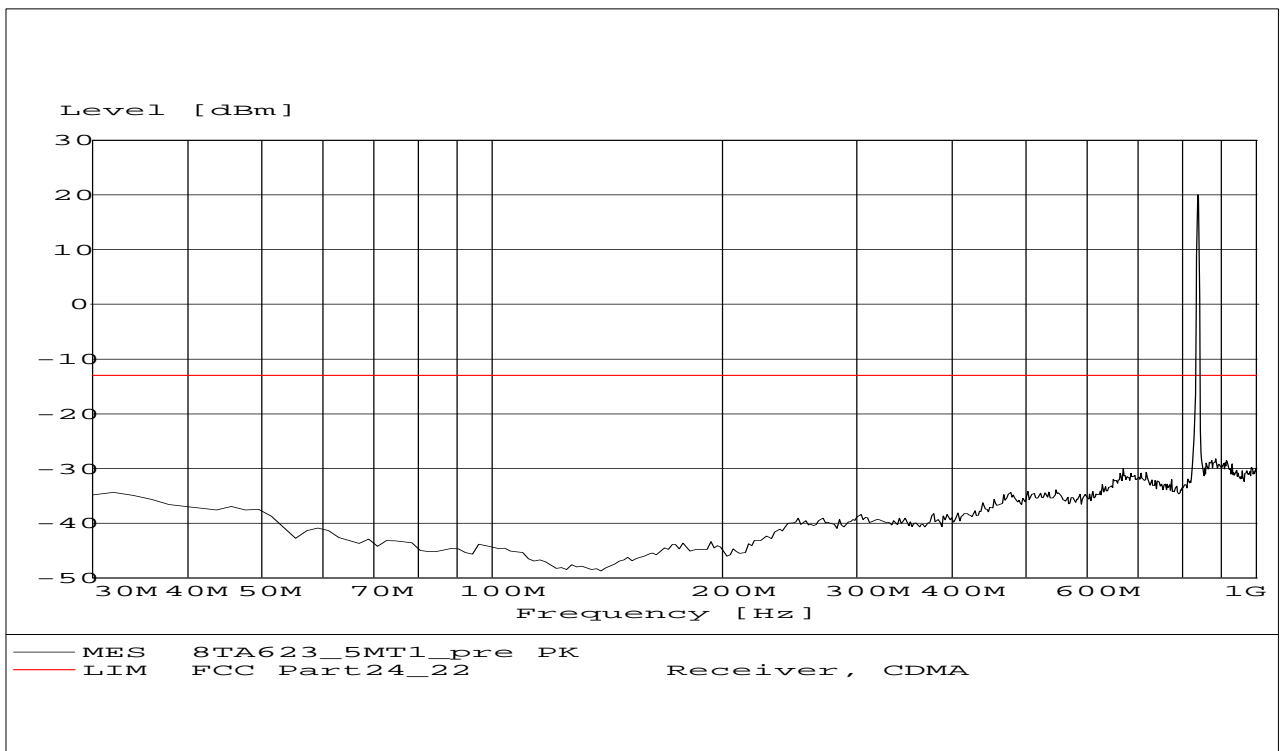

B.2.3.37 RADIATED SPURIOUS EMISSIONS-Channel 4233: 30MHz – 1GHz


Radiated spurious emission limit :-13dBm.

NOTE: peak above the limit line is the Carrier frequency @ ch-846.60

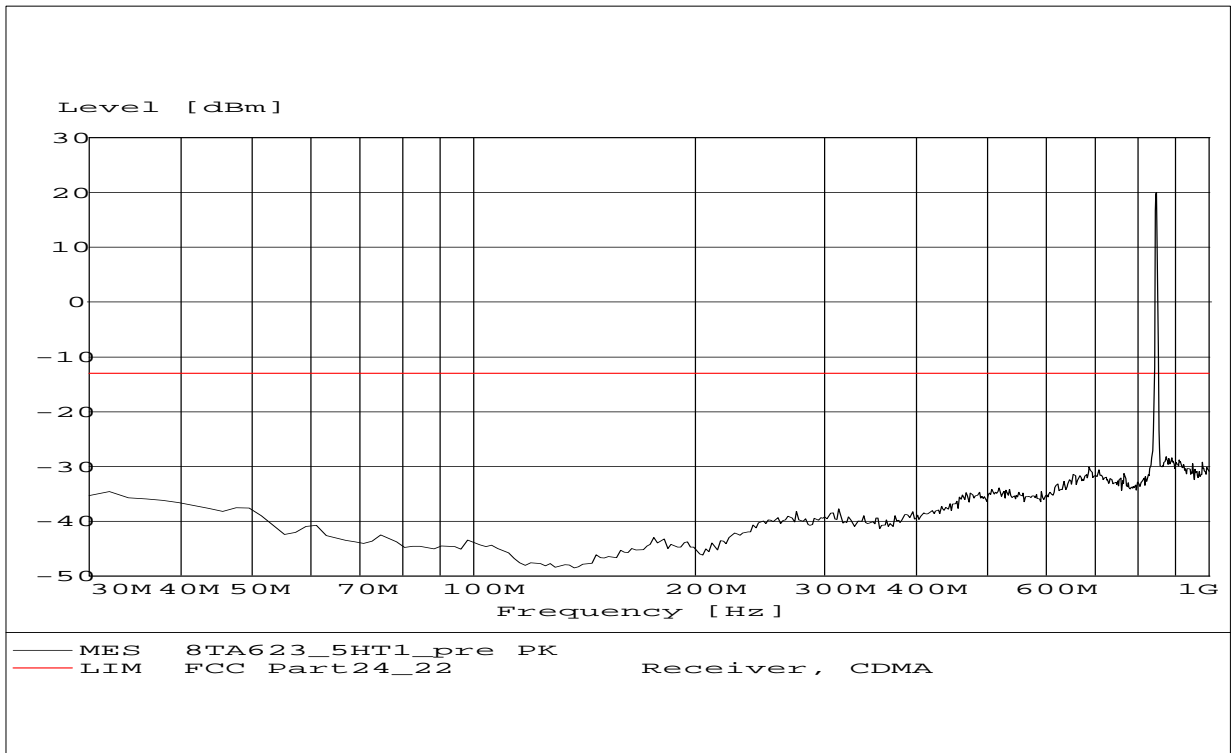


B.2.3.38 RADIATED SPURIOUS EMISSIONS-Channel 4132: 2GHz – 10GHz

Radiated spurious emission limit :-13dBm.

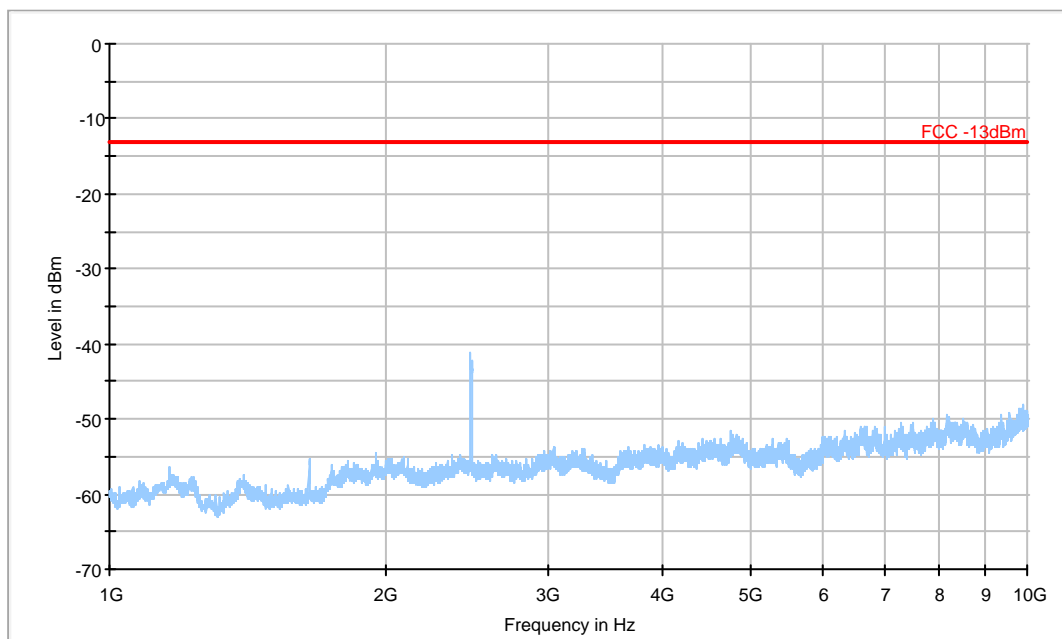


— FCC -13dBm — Preview Measurement Detector 1

B.2.3.39 RADIATED SPURIOUS EMISSIONS-Channel 4183: 2GHz – 10GHz
Radiated spurious emission limit :-13dBm.

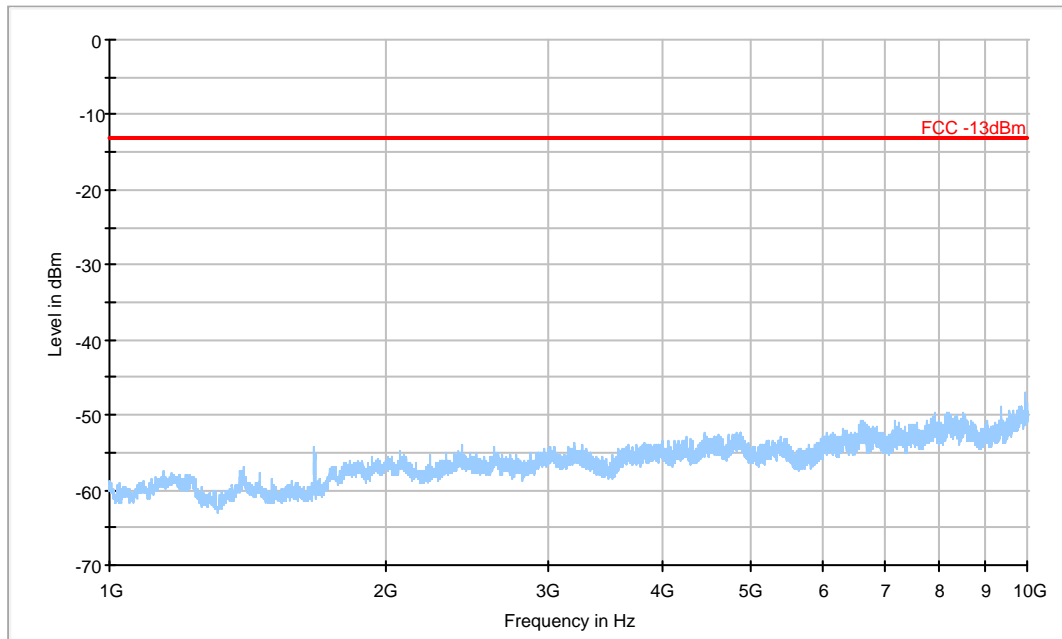


— FCC -13dBm — Preview Measurement Detector 1

B.2.3.40 RADIATED SPURIOUS EMISSIONS-Channel 4233: 2GHz – 10GHz
Radiated spurious emission limit :-13dBm.

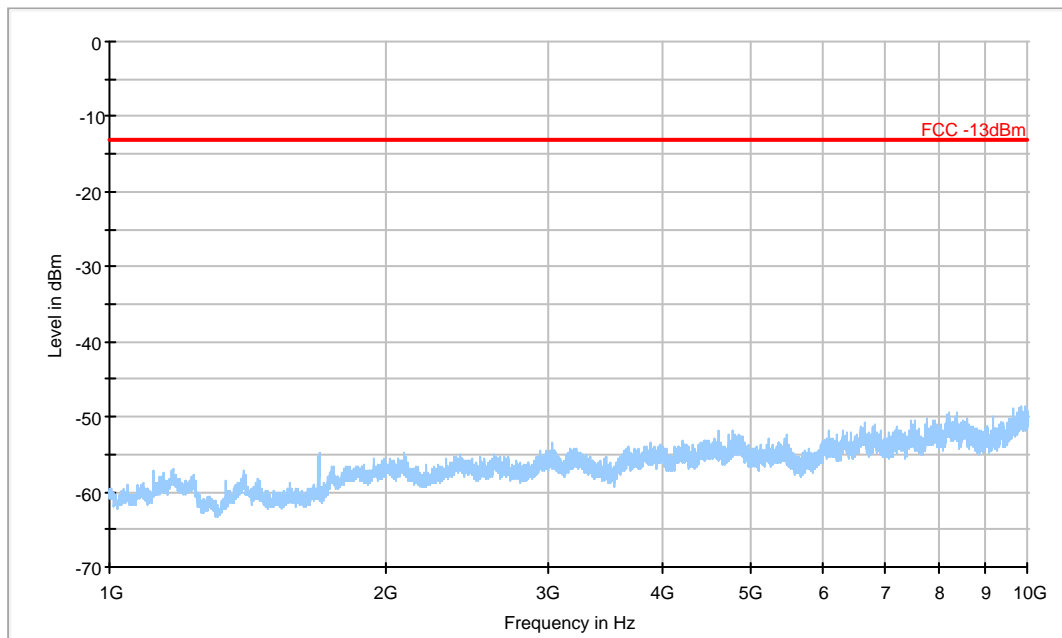


— FCC -13dBm — Preview Measurement Detector 1


B.2.3.41 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 30MHz – 1GHz
Radiated spurious emission limit :-13dBm.

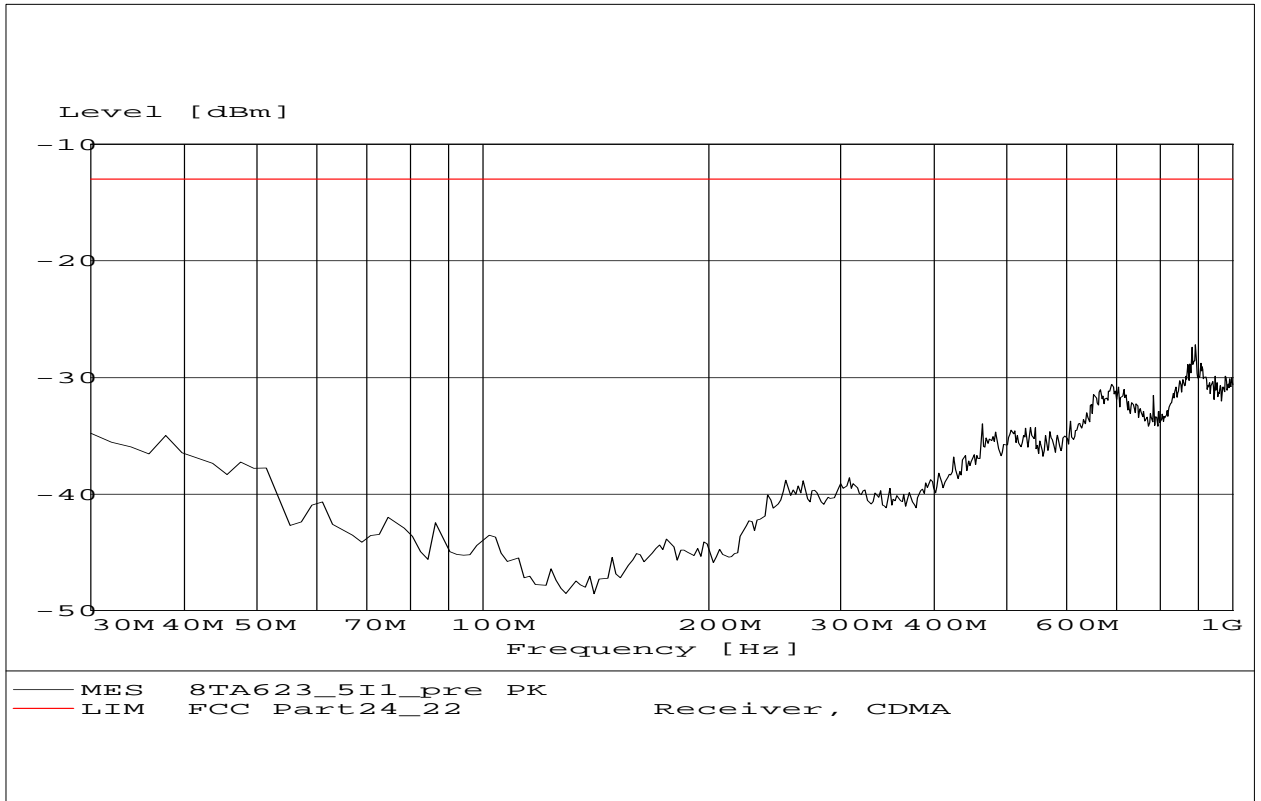


B.2.3.42 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 1GHz – 10GHz
Radiated spurious emission limit :-13dBm.

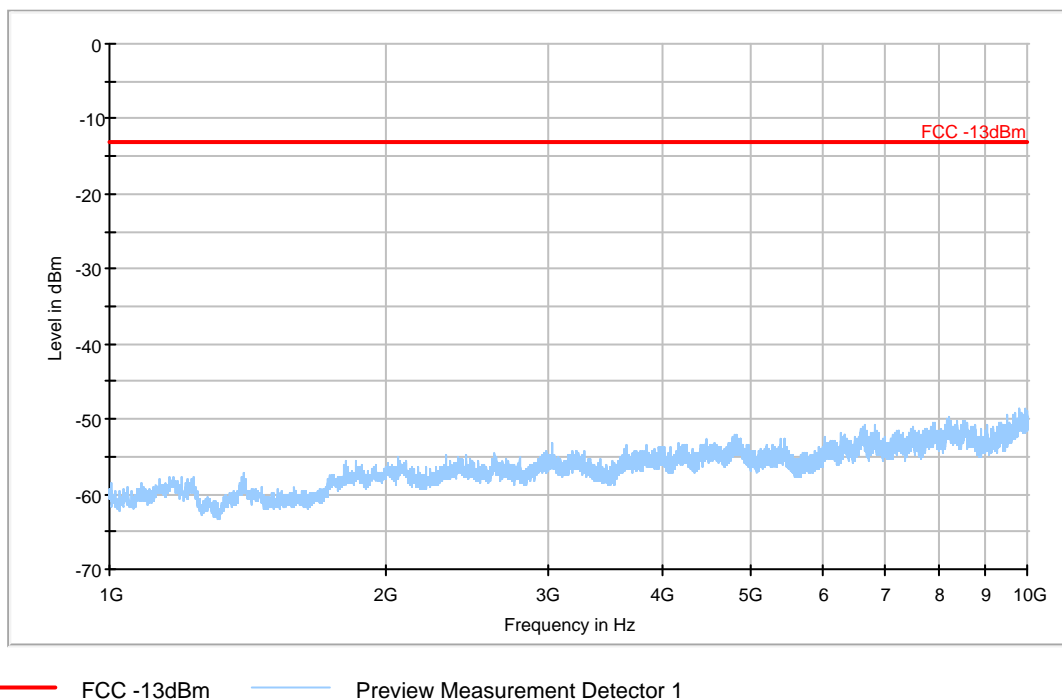

B.2.3.43 RADIATED SPURIOUS EMISSIONS-EUT in Traffic Mode: 9KHz – 30MHz(Valid for 3 channels)

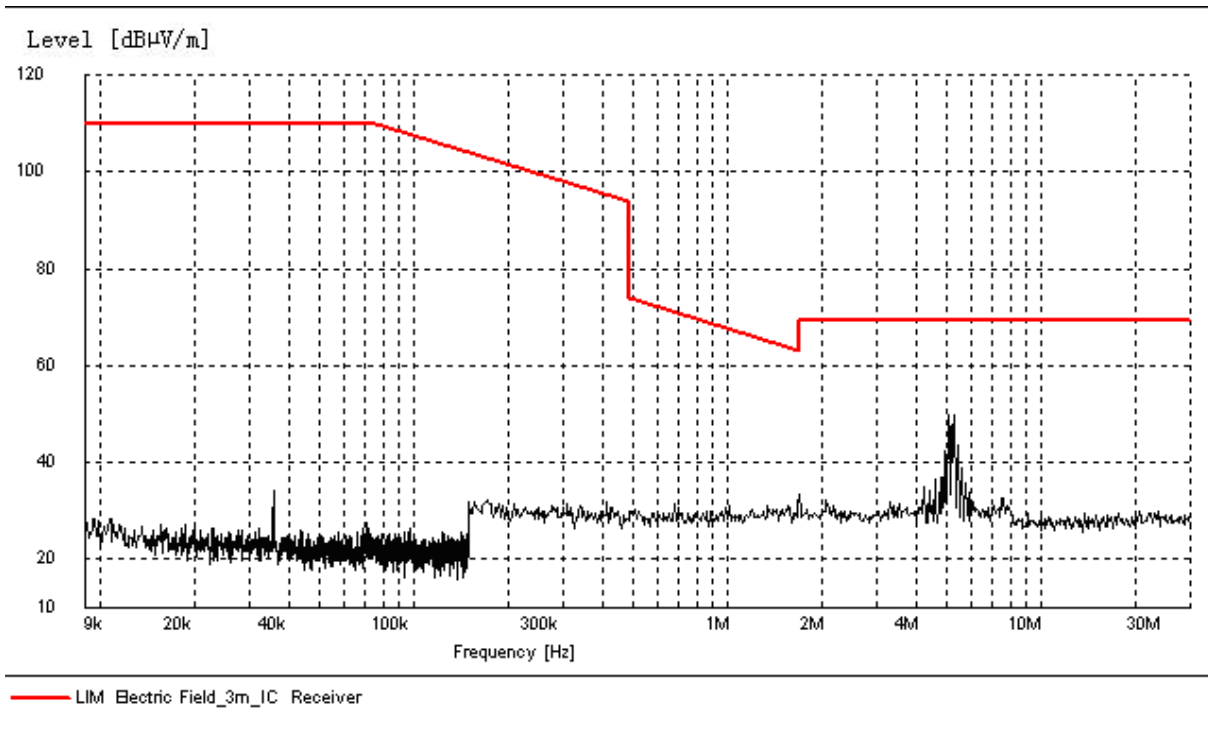


B.2.3.44 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 9KHz – 30MHz(Valid for 3 channels)

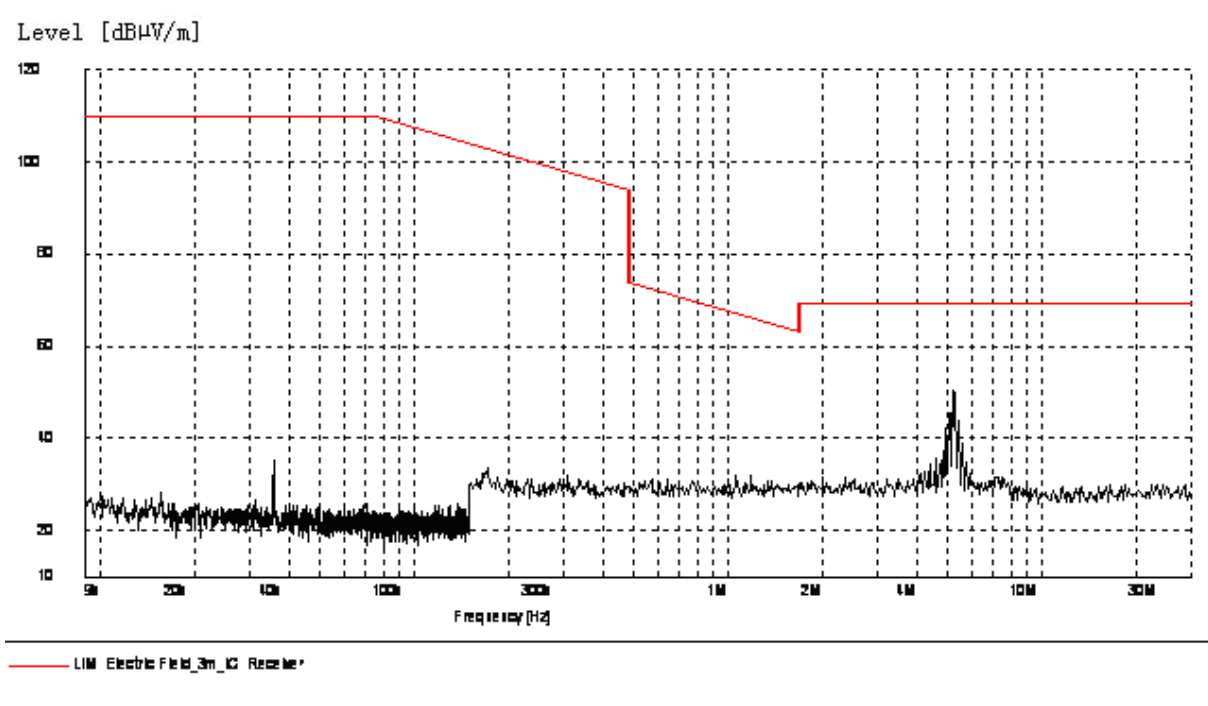


B.3 Receiver Radiation EMISSION

B.3.1 Measurement Result 30MHz-1GHz


GSM 850MHz

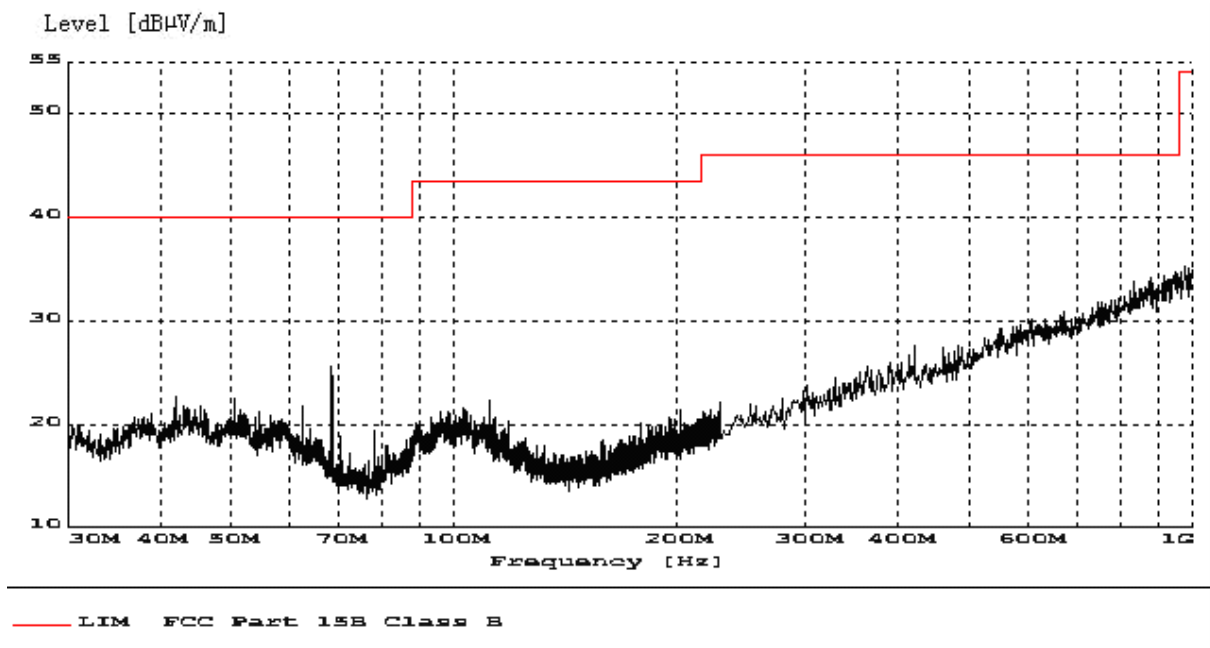


PCS 1900MHz

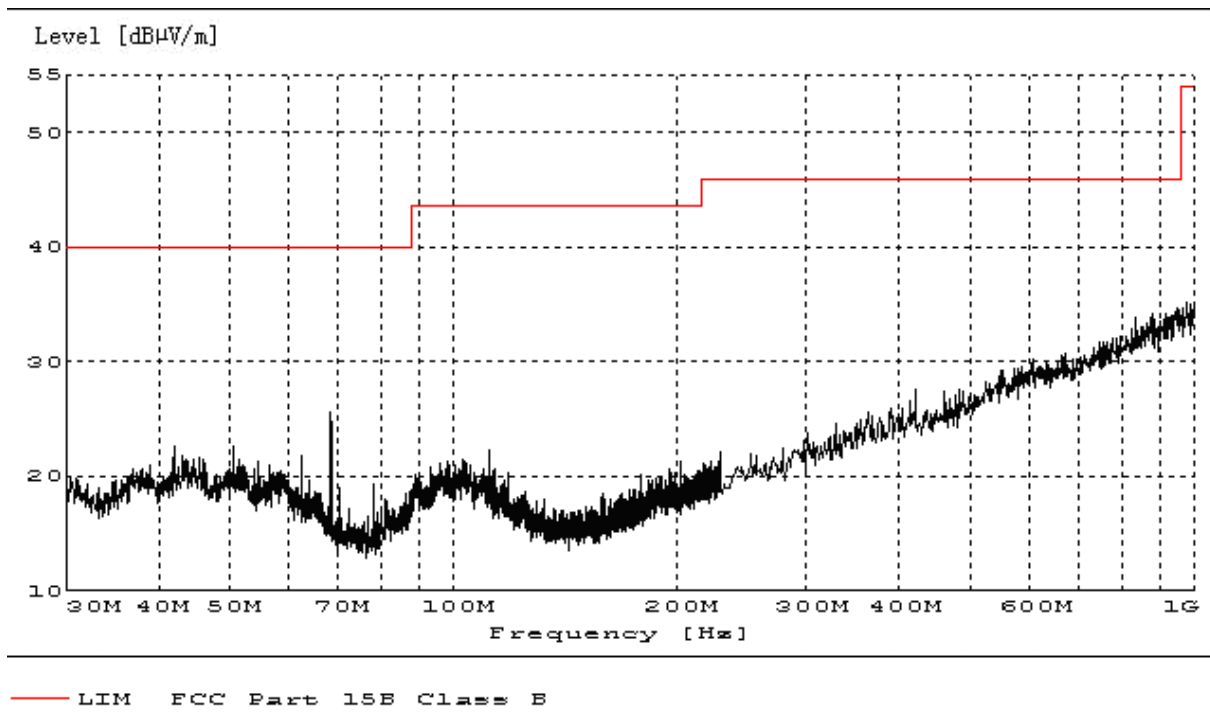


WCDMA BandII

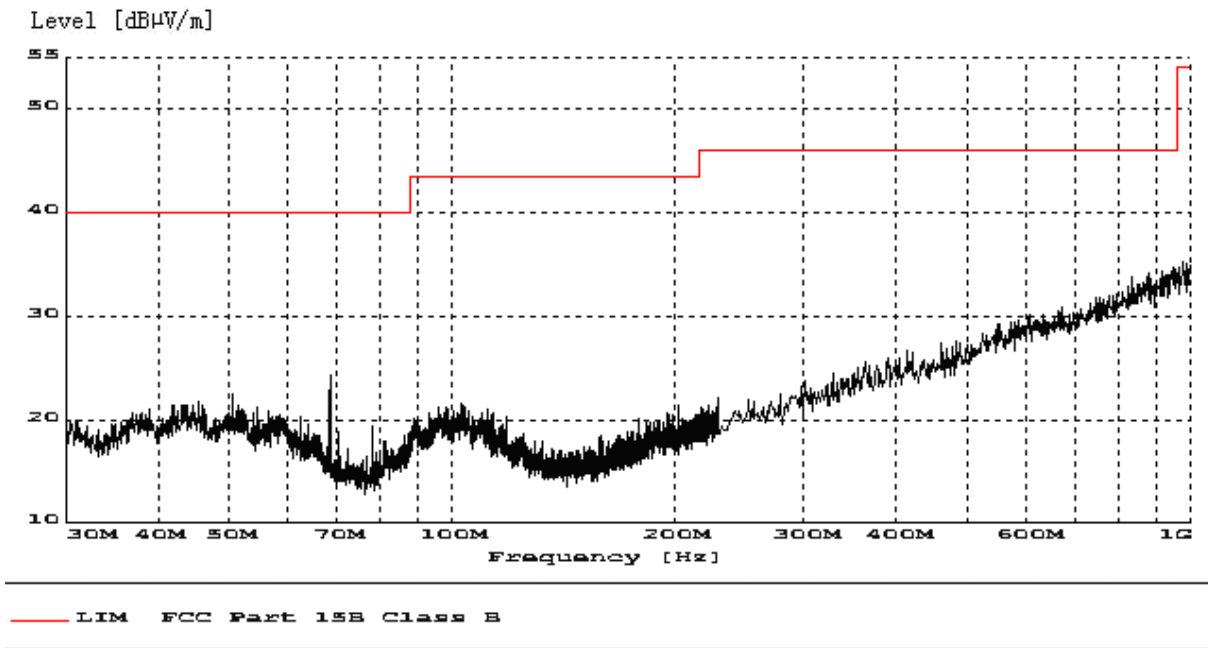


WCDMA BandV

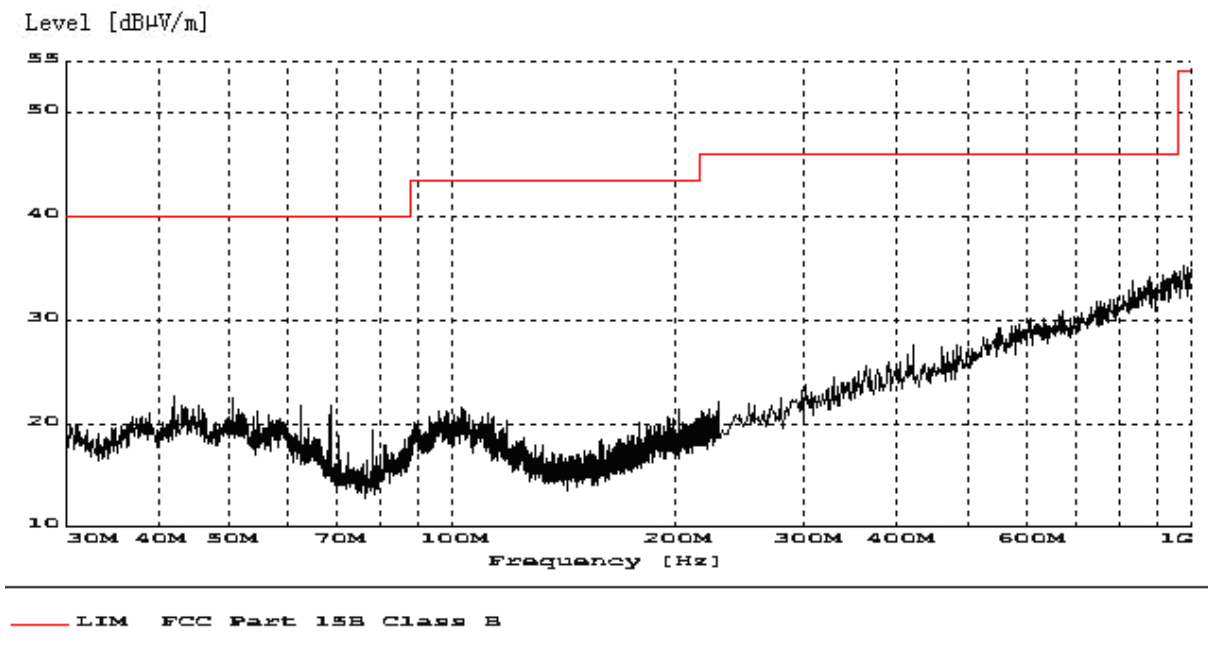


B.3.2 Measurement Result 1GHz-4GHz
GSM 850MHz

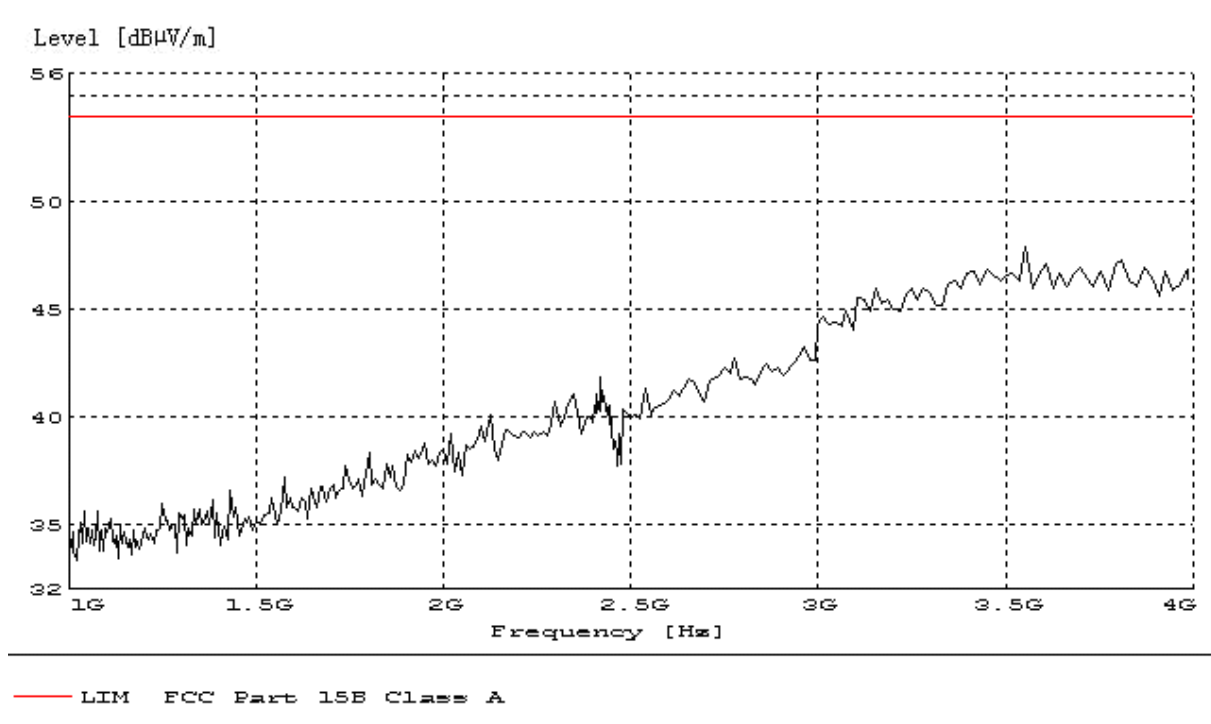


PCS 1900MHz

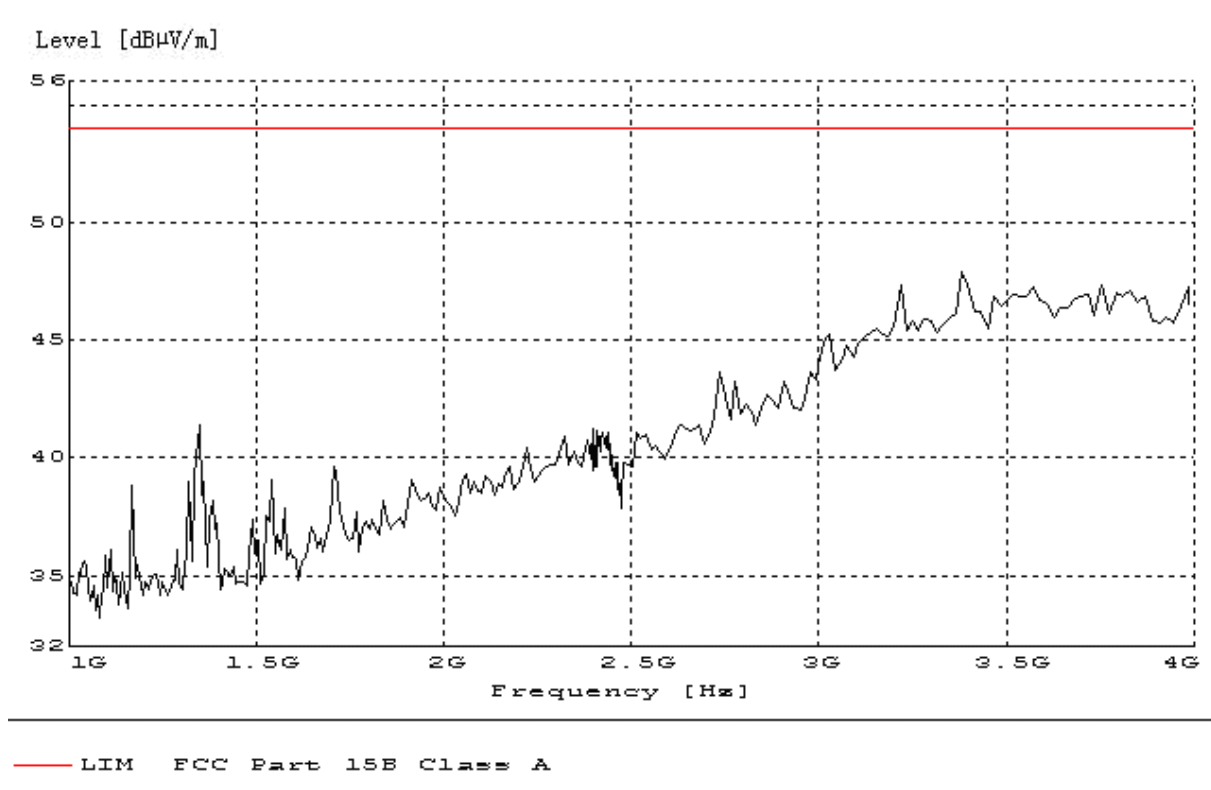


WCDMA BandII

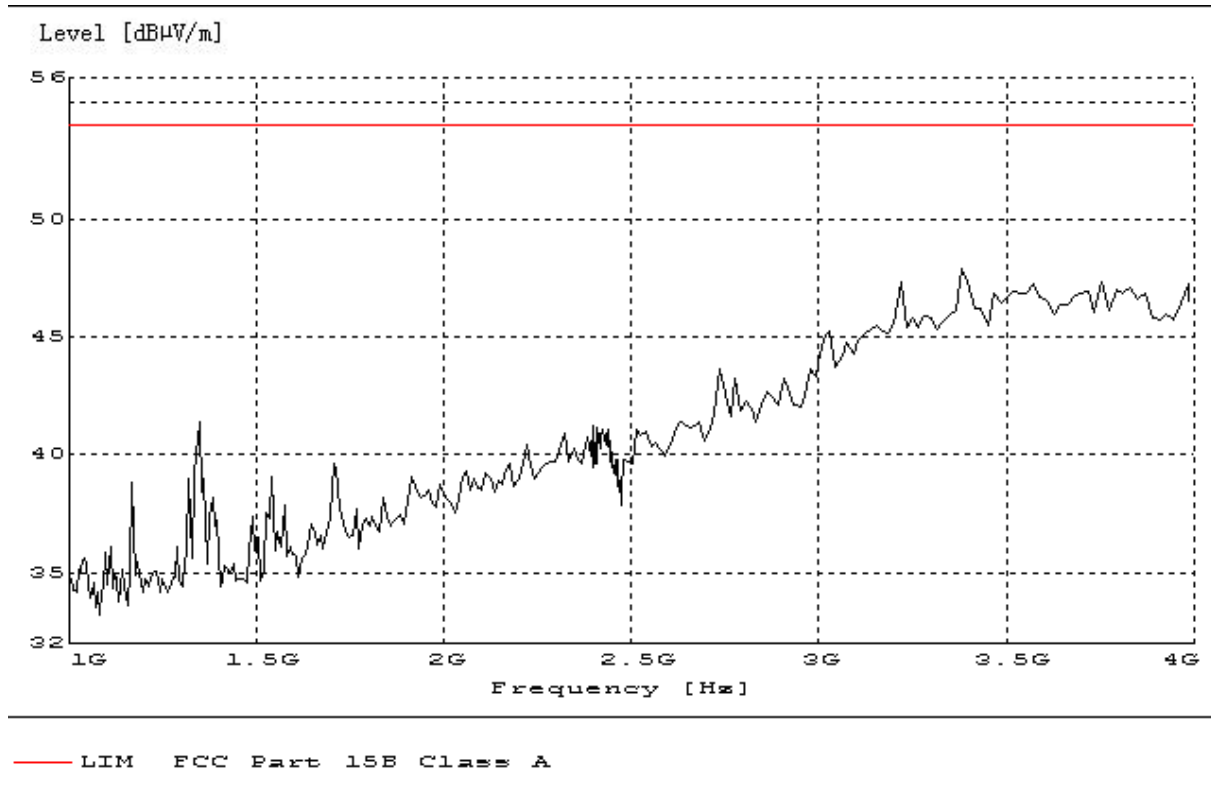


WCDMA BandV

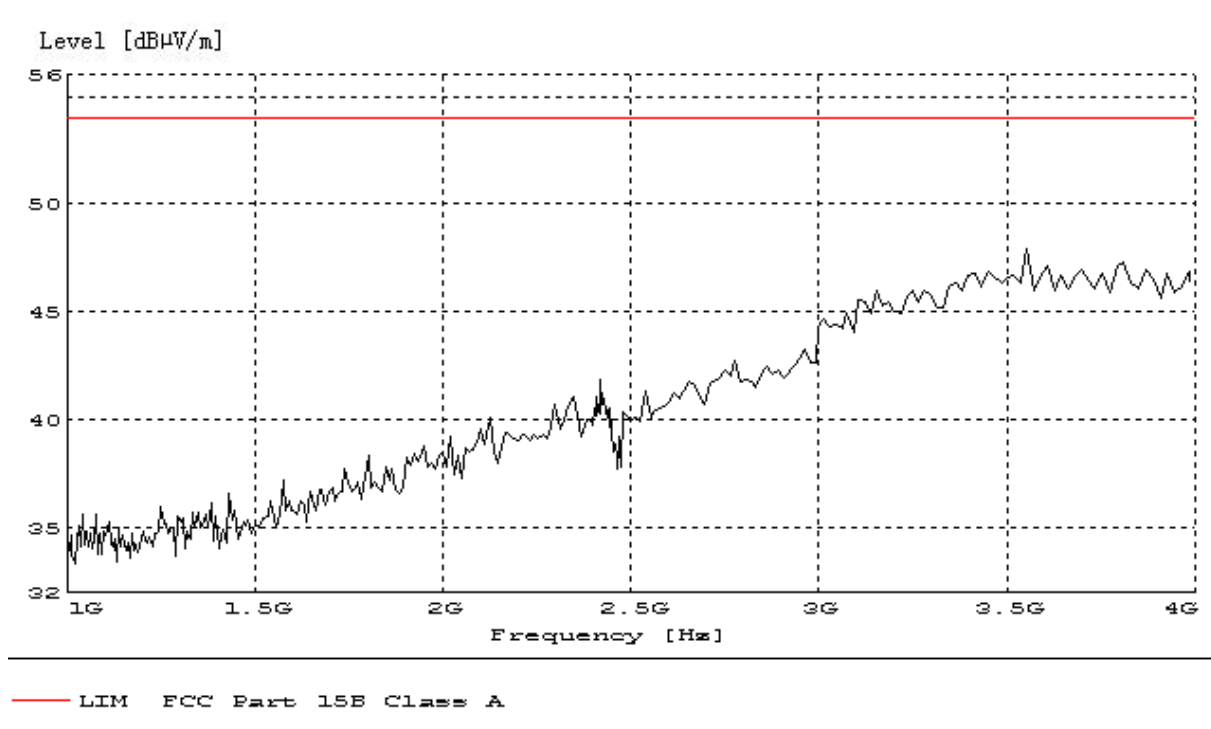


B.3.3 Measurement Result 4GHz-18GHz
GSM 850MHz

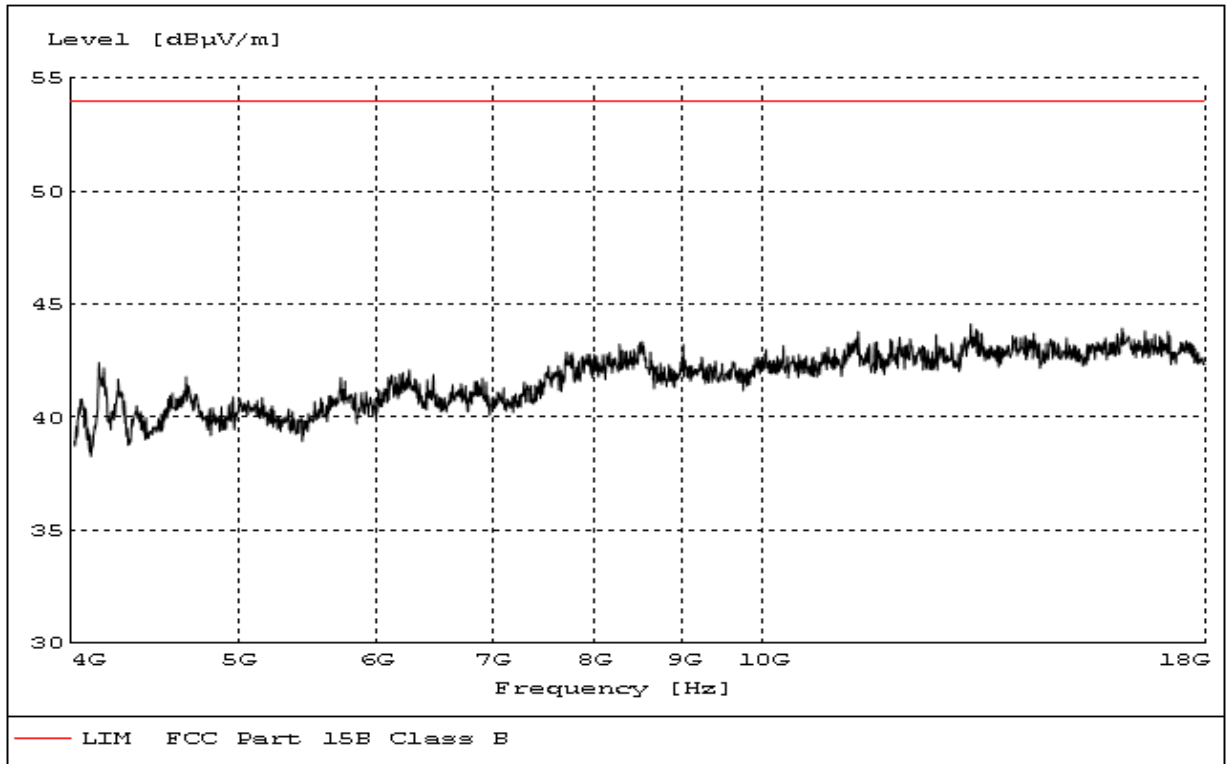


PCS 1900MHz

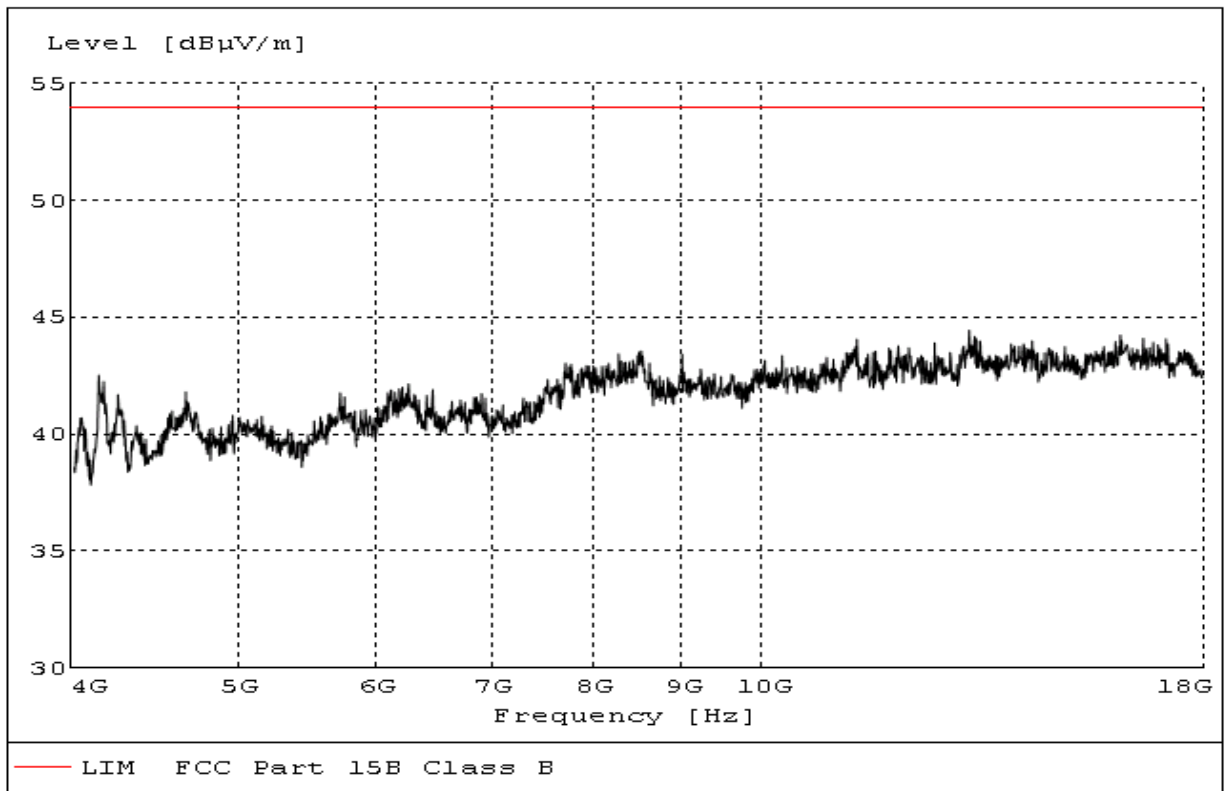


WCDMA BandII

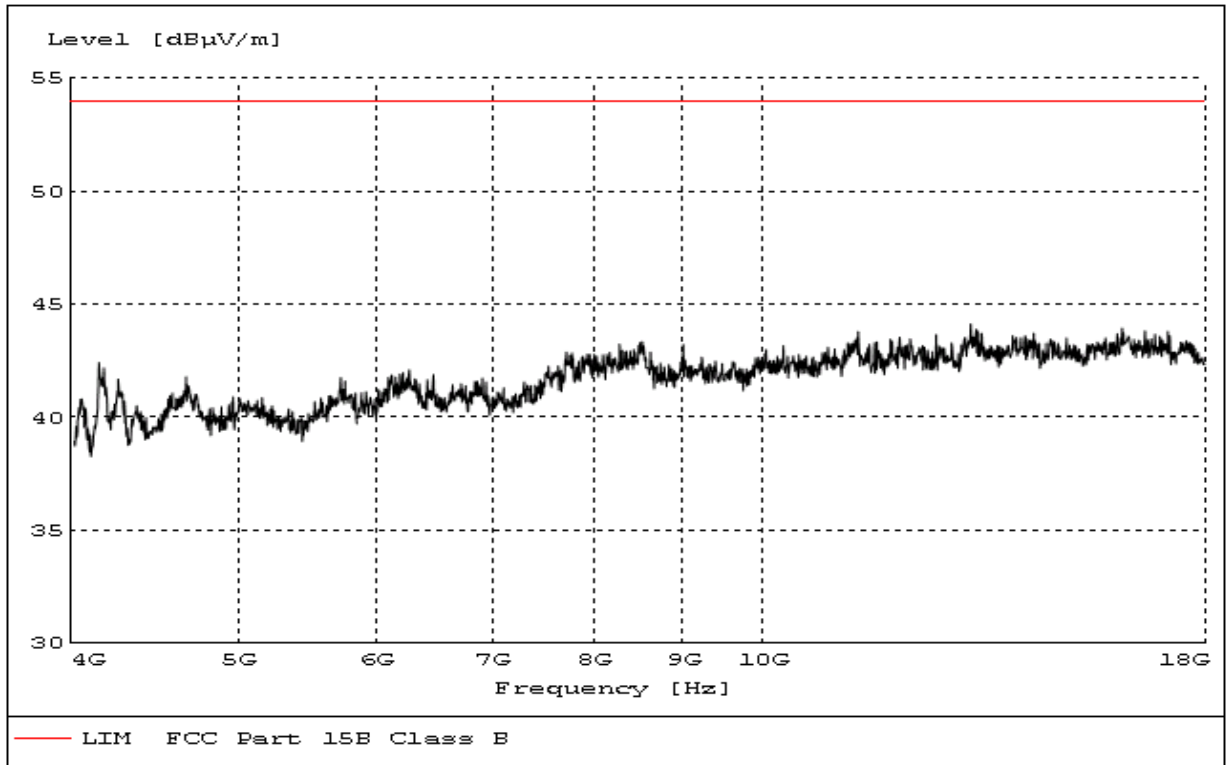


WCDMA BandV

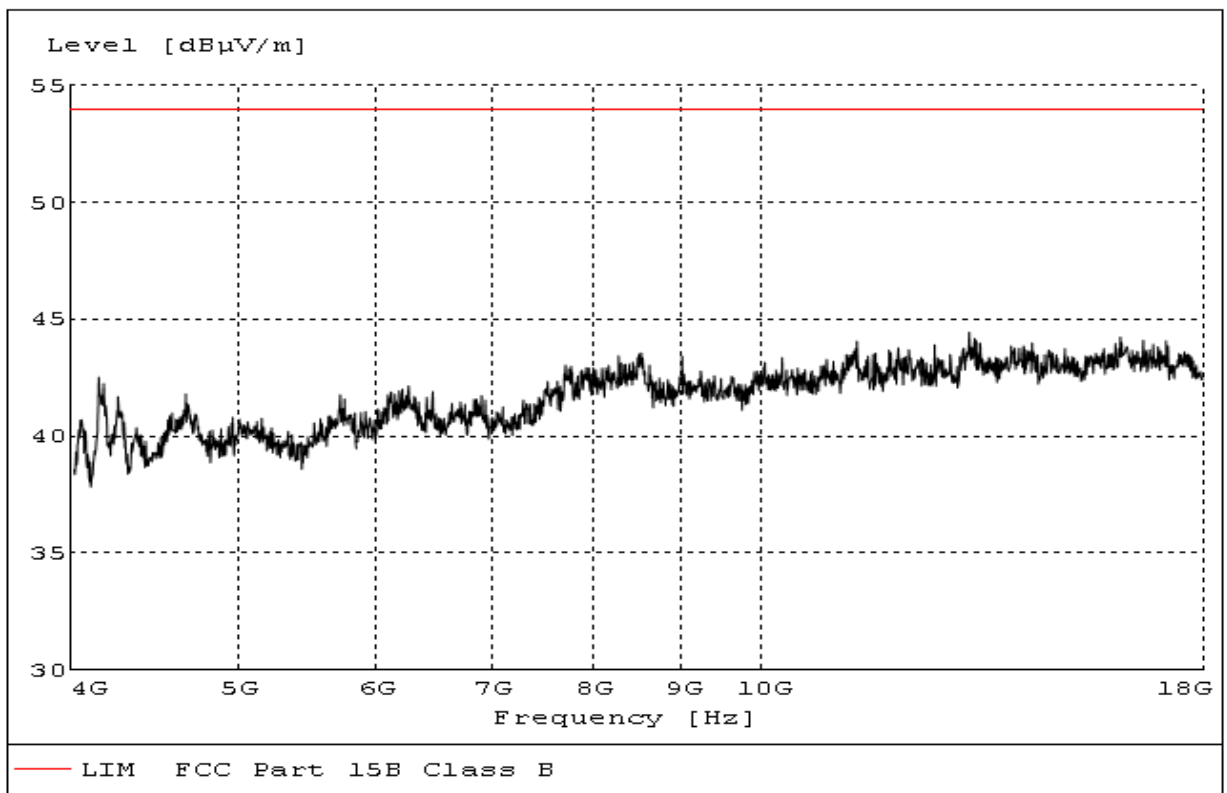


A.3.4 Measurement Result 18GHz-26.5GHz
GSM 850MHz

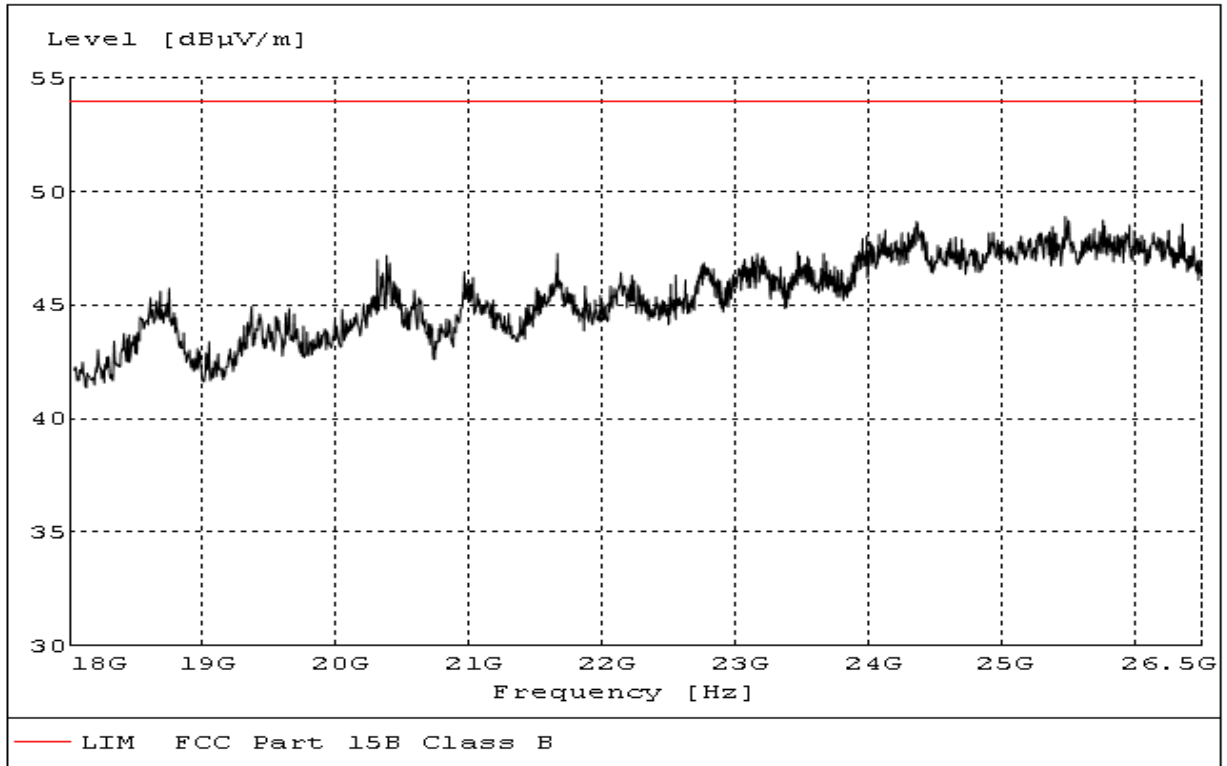


PCS 1900MHz

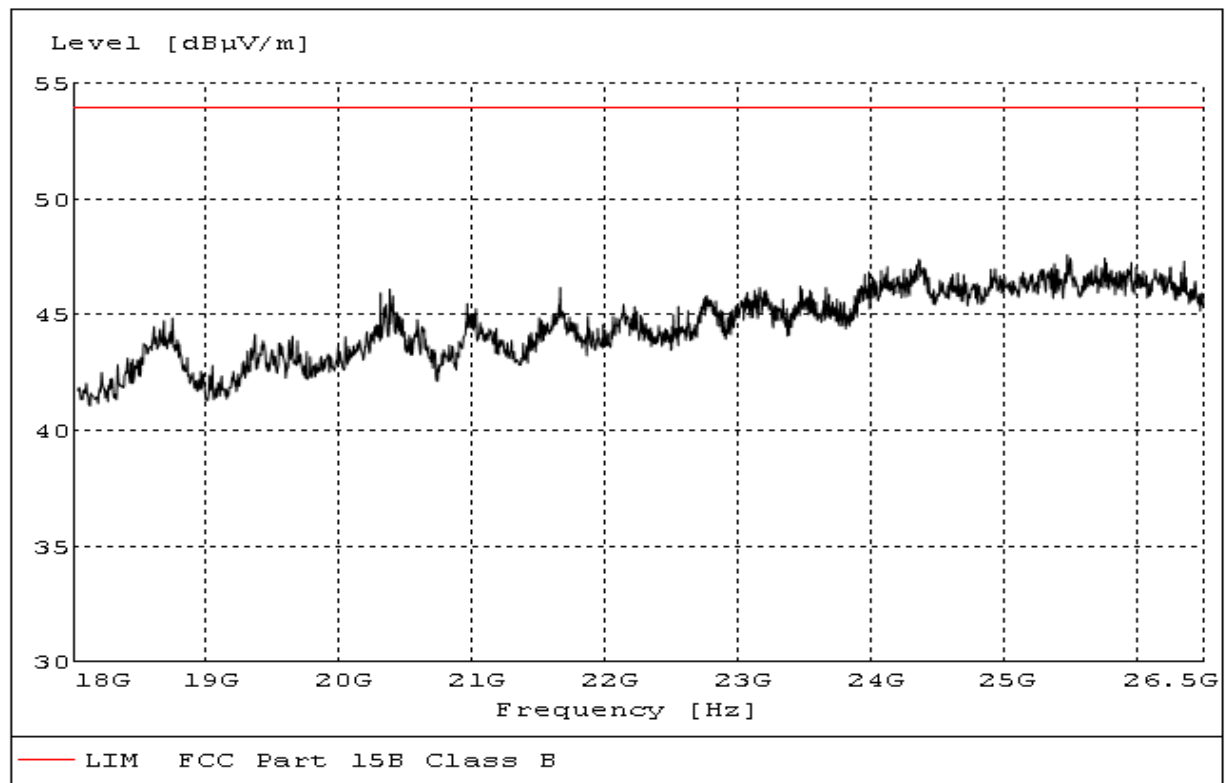

WCDMA BandII

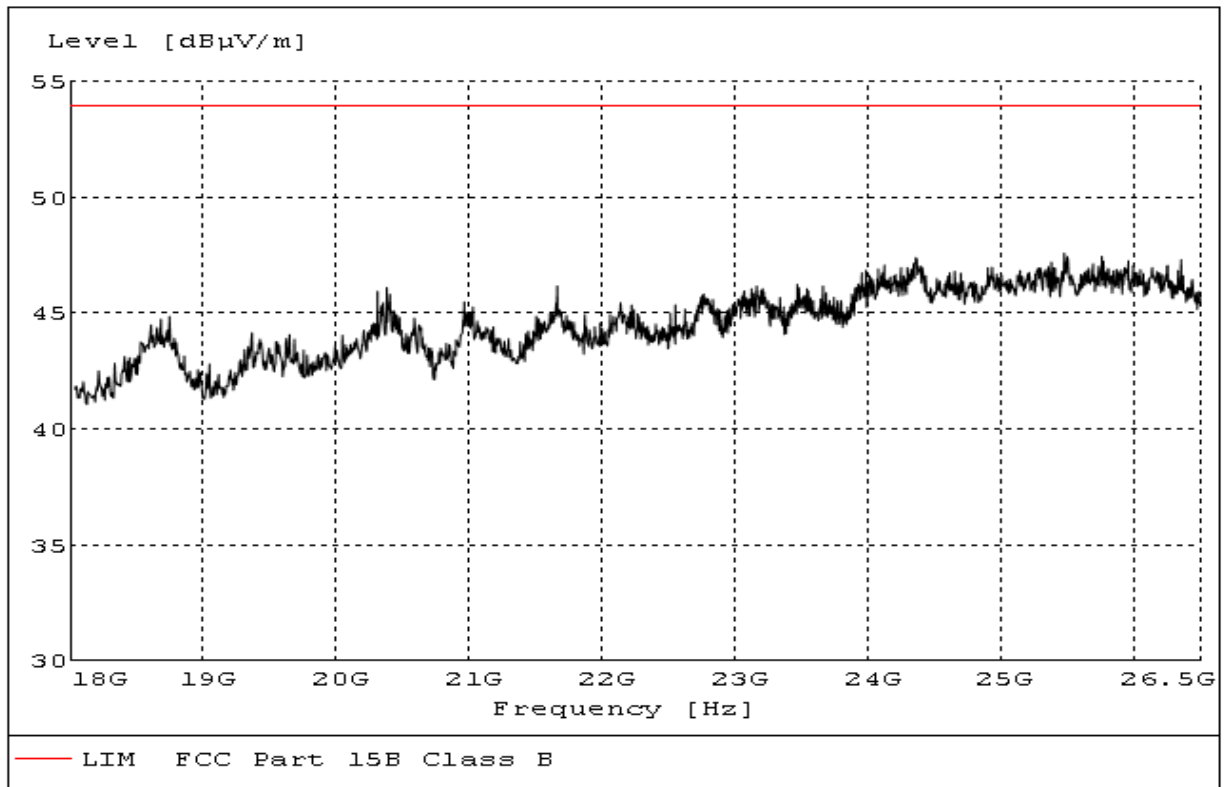

WCDMA BandV

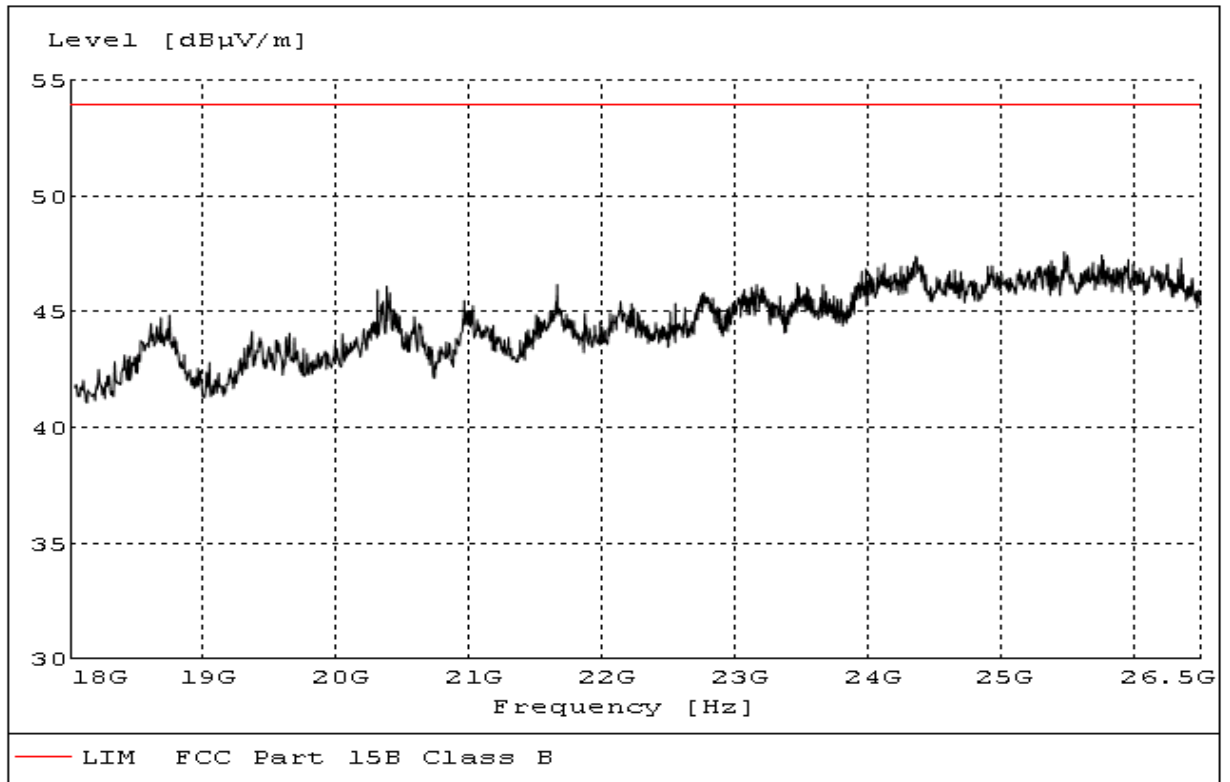

B.4 CONDUCTED EMISSION

The measurement procedure in ANSI C63.4-1003 is used. Conducted Emission is measured with travel charger.


B.4.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi -Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

* Decreases with logarithm of the frequency

B.4.2 Measurement result


GSM850MHz

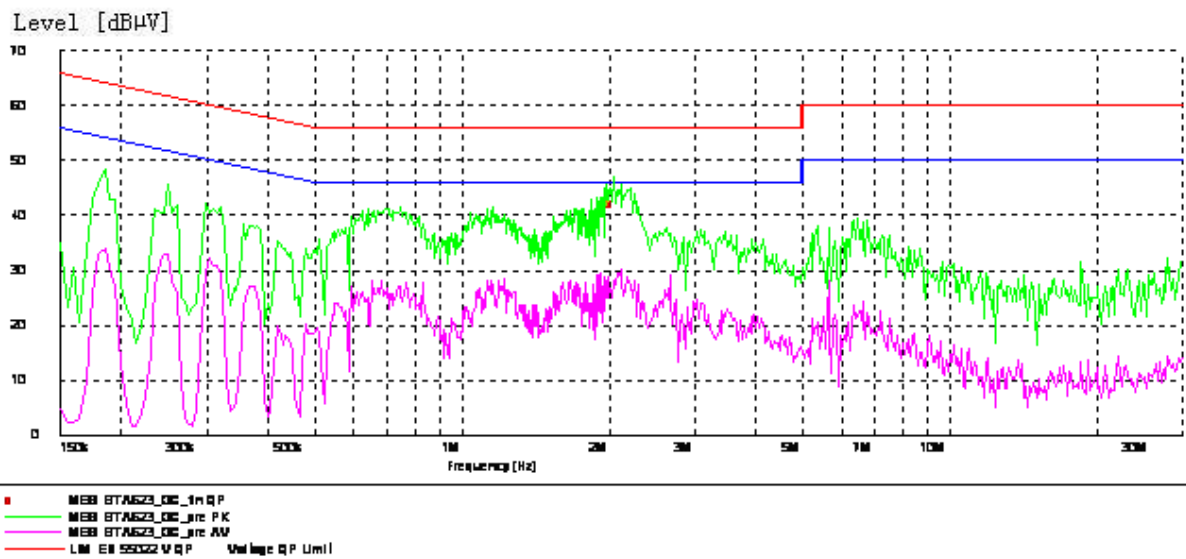

MEASUREMENT RESULT: "8TA623_GC_fin QP"

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
2.048385	42.00	10.1	56	14.0	L1	FLO


PCS 1900MHz

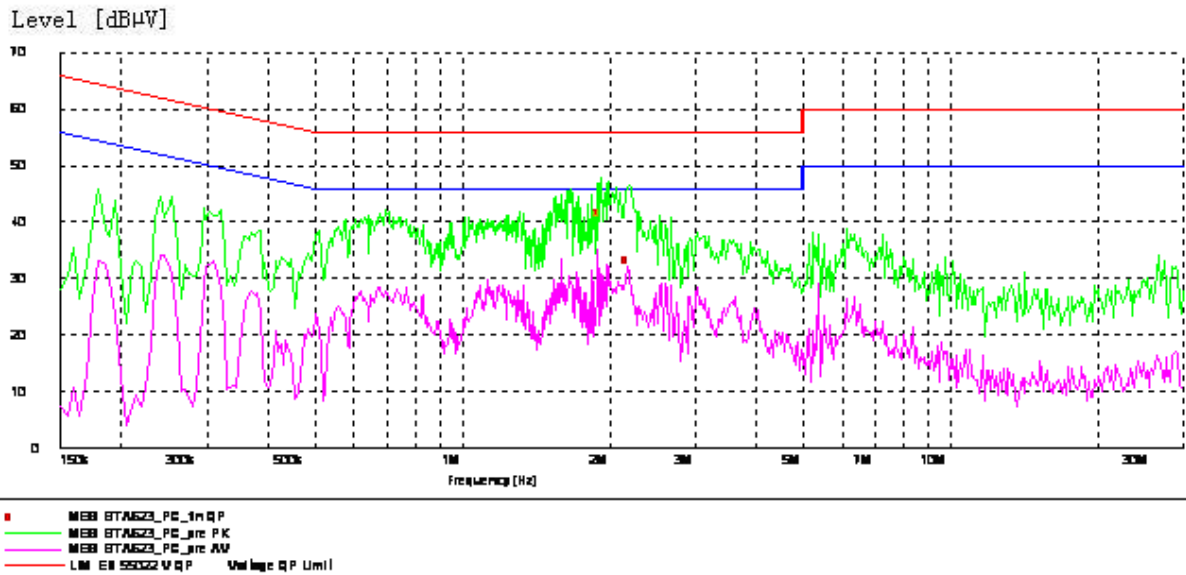

MEASUREMENT RESULT: "8TA623_PC_fin QP"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
1.915000	41.80	10.1	56	14.3	L1	FLO
2.200677	33.50	10.1	56	22.5	N	GND


WCDMA Band II

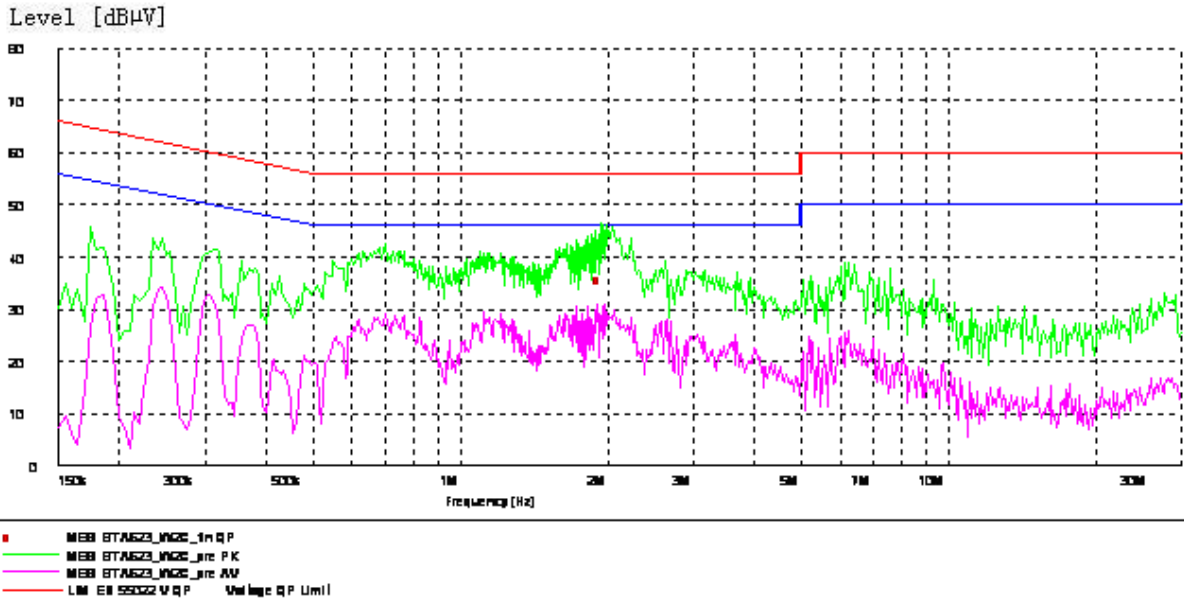

MEASUREMENT RESULT: "8TA623_W2C_fin QP"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
1.940000	35.90	10.1	56	20.1	N	GND


WCDMA Band V

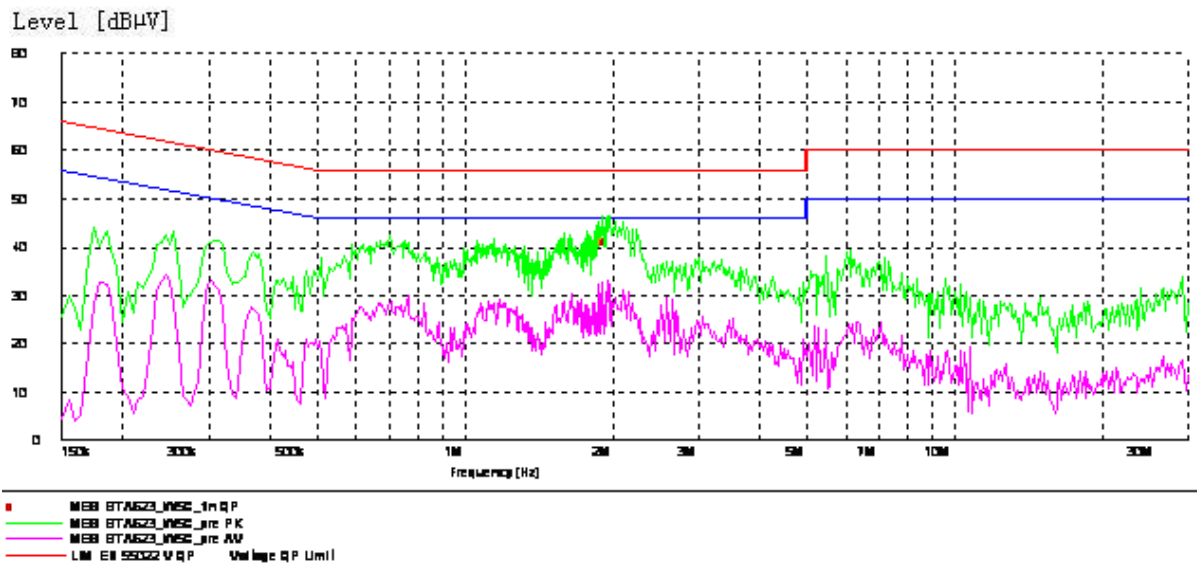

MEASUREMENT RESULT: "8TA623_W5C_fin QP"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
1.950000	41.20	10.1	56	14.8	L1	GND


MP3

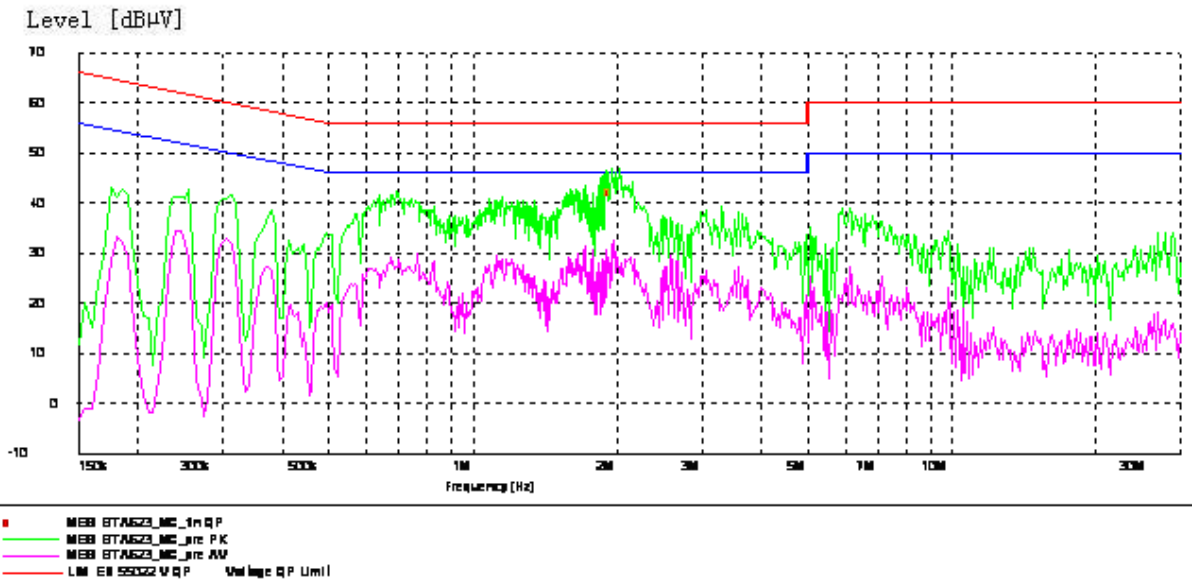

MEASUREMENT RESULT: "8TA623_MC_fin QP"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
1.940000	42.20	10.1	56	13.8	L1	FLO


Camera

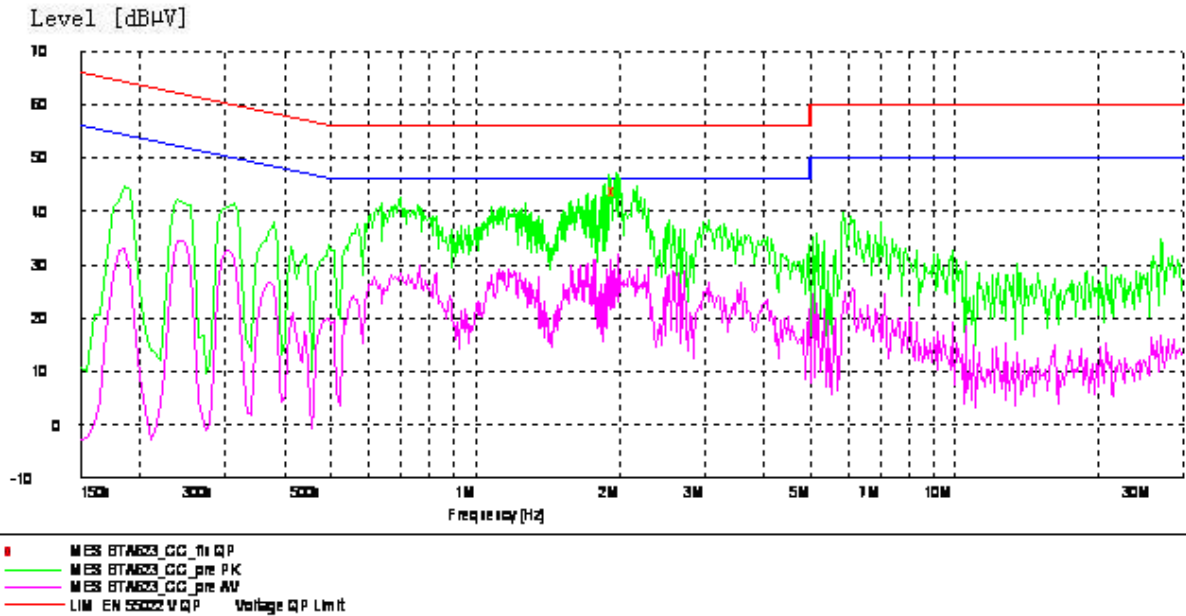

MEASUREMENT RESULT: "8TA623_CC_fin QP"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
1.970000	43.80	10.1	56	12.2	L1	GND

Bluetooth

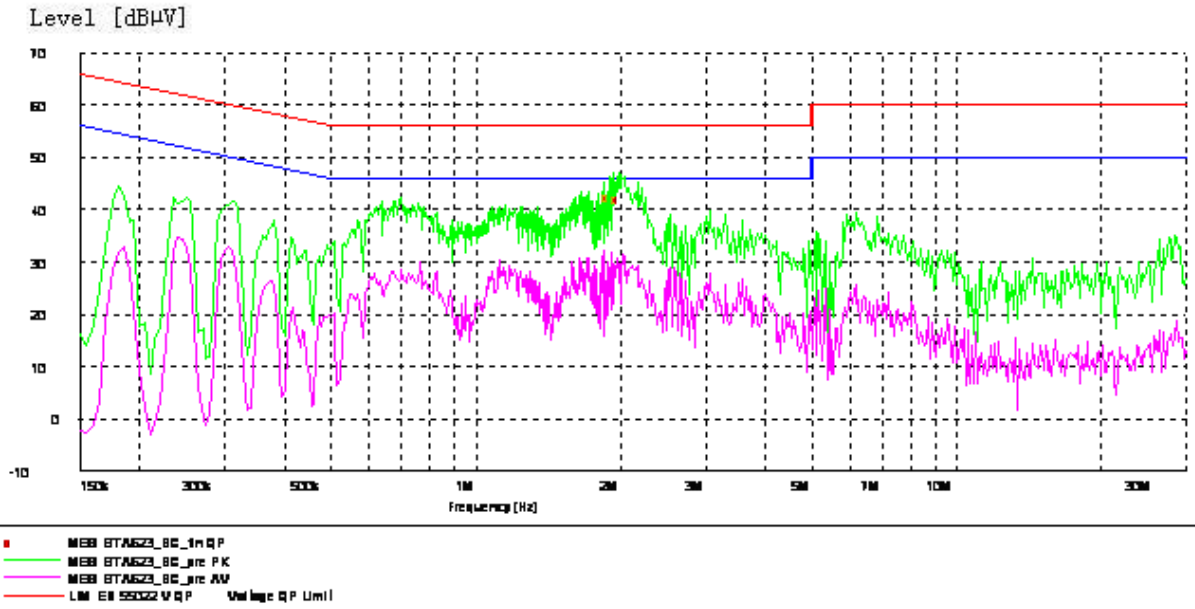

MEASUREMENT RESULT: "8TA623_BC_fin QP"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
1.900000	42.60	10.1	56	13.4	L1	GND
1.985000	42.00	10.1	56	14.0	L1	GND

B.5 FREQUENCY STABILITY

B.5.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 , channel 190 for GSM850, channel 9400 for WCDMA Band II and channel 4183 for WCDMA Band V measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50°C to -30°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

B.5.2 Measurement Limit

B.5.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.4VDC and 4.2VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

B.5.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec.

24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

B.5.3 Measurement results

GSM 850

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	11	0.013
3.7	7	0.008
4.2	9	0.011

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	24	0.029
-20	22	0.026
-10	16	0.019
0	15	0.018
10	11	0.013
20	8	0.010
30	13	0.016
40	19	0.023
50	26	0.031

PCS 1900

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	19	0.010
3.7	18	0.010
4.2	22	0.012

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	35	0.019
-20	27	0.014
-10	25	0.013
0	23	0.012
10	22	0.012
20	21	0.011
30	23	0.012
40	25	0.013
50	31	0.016

WCDMA Band II

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	25	0.013
3.7	24	0.013
4.2	28	0.015

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	35	0.019
-20	32	0.017
-10	30	0.016
0	28	0.015
10	26	0.013
20	23	0.012
30	25	0.013
40	28	0.015
50	32	0.017

WCDMA Band V

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	21	0.025
3.7	20	0.024
4.2	22	0.026

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	29	0.035
-20	25	0.030
-10	24	0.029
0	23	0.028
10	22	0.026
20	20	0.024
30	21	0.025
40	22	0.026
50	27	0.032

B.6 OCCUPIED BANDWIDTH

B.6.1 Occupied Bandwidth Results


Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. The table below lists the measured -20dBc BW (99%). Spectrum analyzer plots are included on the following pages.

GSM 850(99%)

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
824.2	245.192
836.6	241.987
848.8	246.795


GSM 850

Channel 128-Occupied Bandwidth (99%)

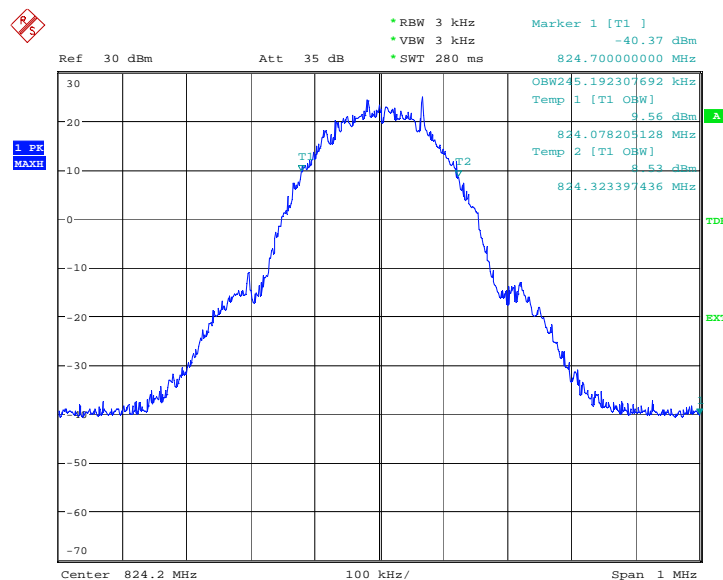


Date: 8.SEP.2008 02:01:41

Channel 190-Occupied Bandwidth (99%)

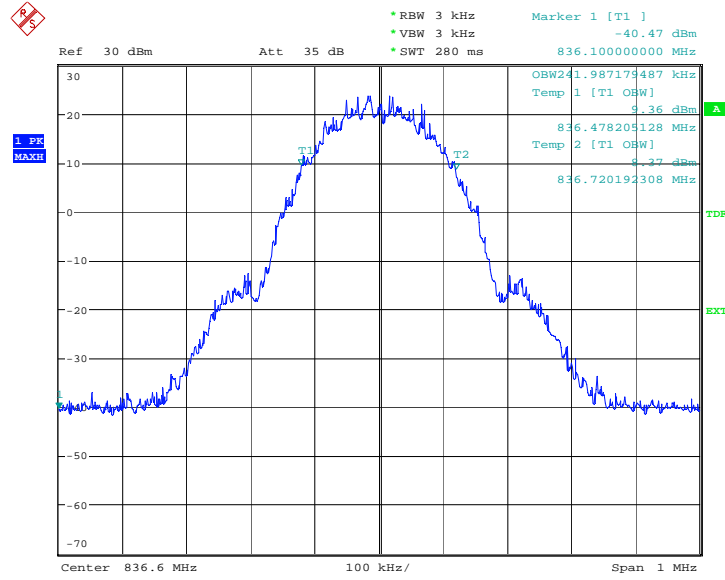

Date: 8.SEP.2008 02:02:39

Channel 251-Occupied Bandwidth (99%)

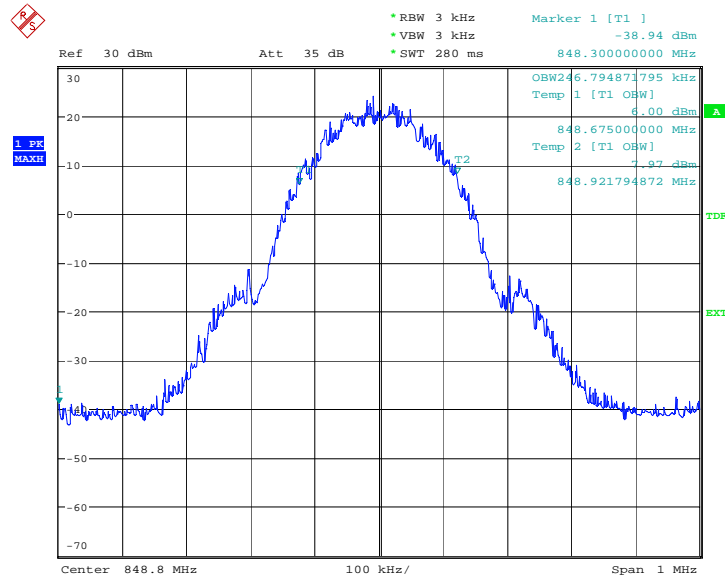


Date: 8.SEP.2008 02:03:20

GPRS

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
824.2	245.192
836.6	241.987
848.8	241.987


GPRS

Channel 128-Occupied Bandwidth (99%)

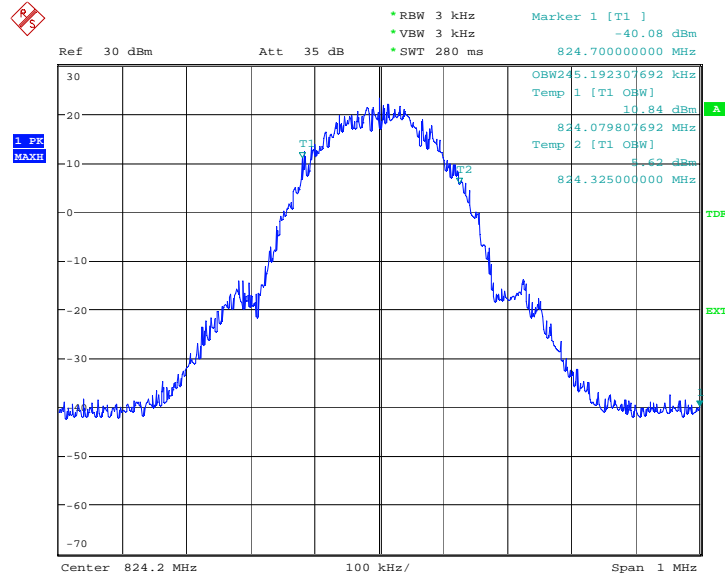


Date: 8.SEP.2008 02:52:13

Channel 190-Occupied Bandwidth (99%)

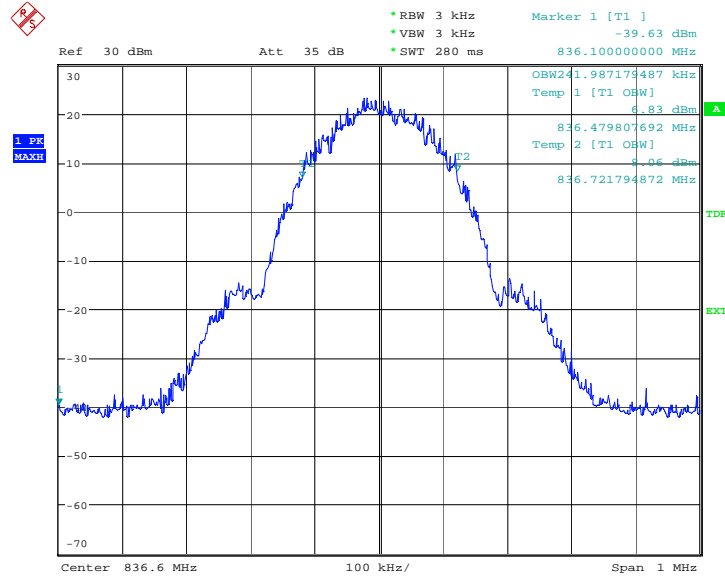

Date: 8.SEP.2008 02:52:54

Channel 251-Occupied Bandwidth (99%)

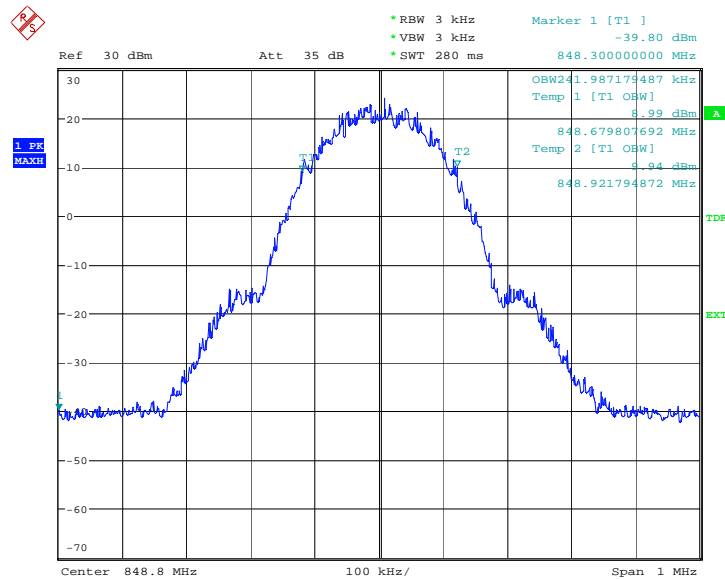


Date: 8.SEP.2008 02:53:33

EGPRS

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
824.2	240.385
836.6	238.782
848.8	245.192


EGPRS

Channel 128-Occupied Bandwidth (99%)

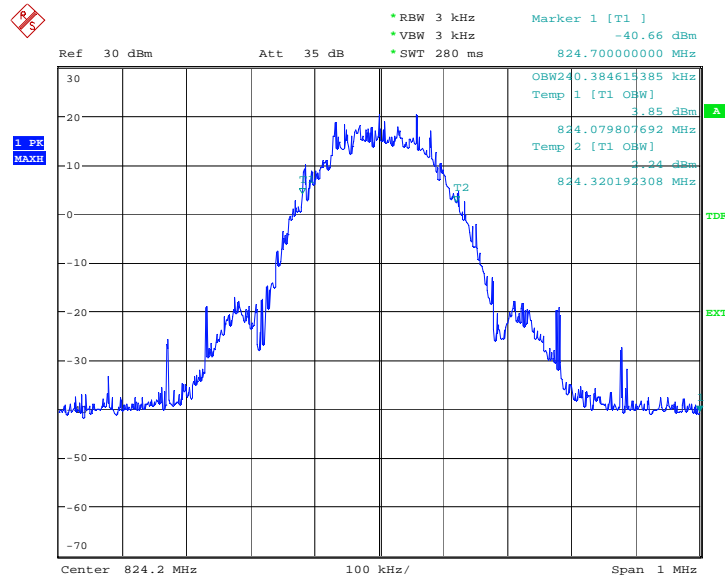


Date: 8.SEP.2008 03:17:49

Channel 190-Occupied Bandwidth (99%)

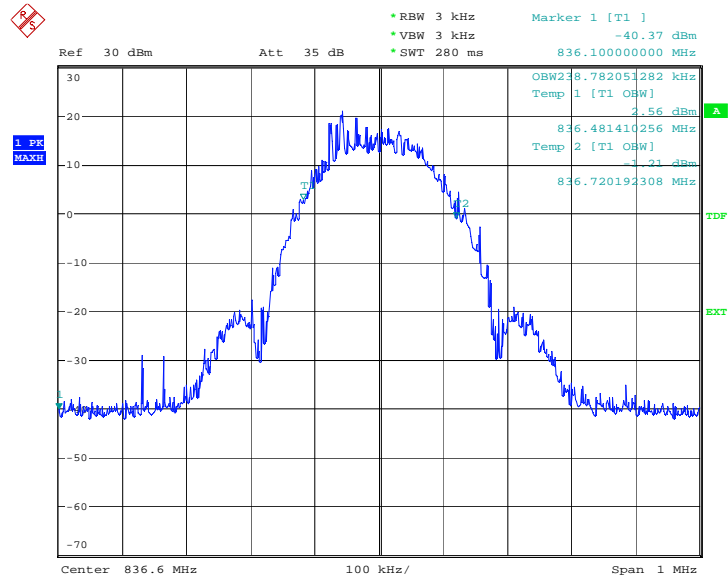

Date: 8.SEP.2008 03:18:20

Channel 251-Occupied Bandwidth (99%)

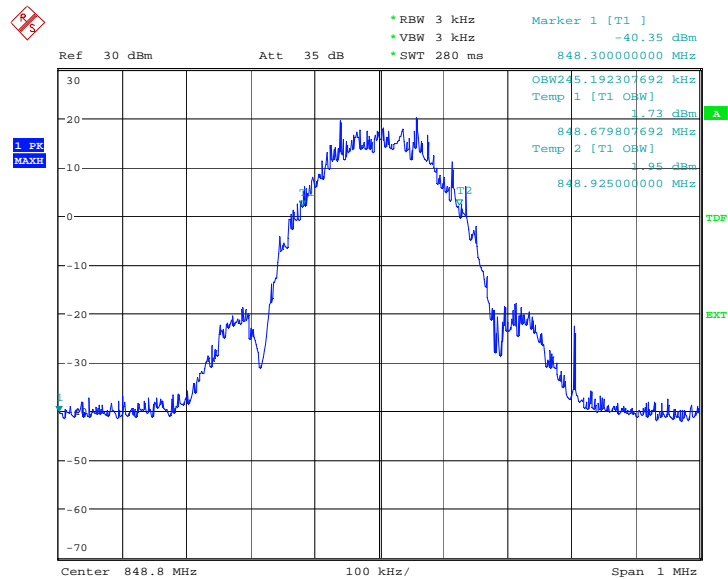


Date: 8.SEP.2008 03:18:56

PCS 1900(99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
1850.2	245.192
1880.0	243.590
1909.8	246.795

**PCS 1900
Channel 512-Occupied Bandwidth (99%)**

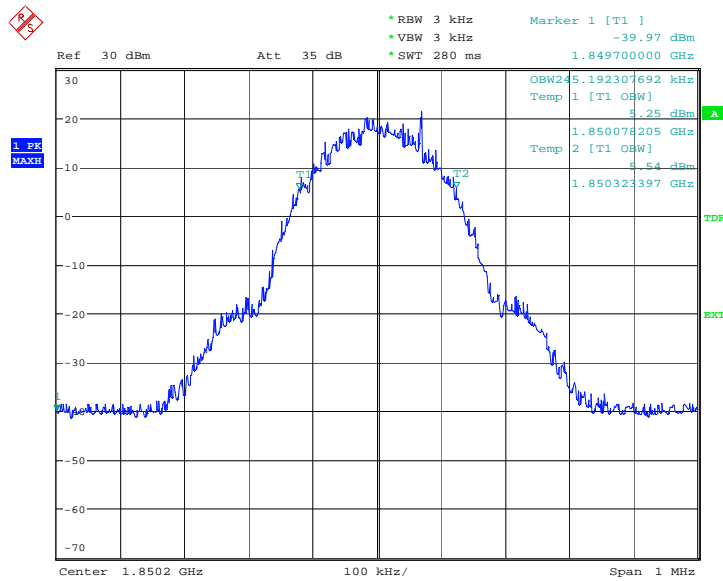


Date: 8.SEP.2008 02:04:25

Channel 661-Occupied Bandwidth (99%)

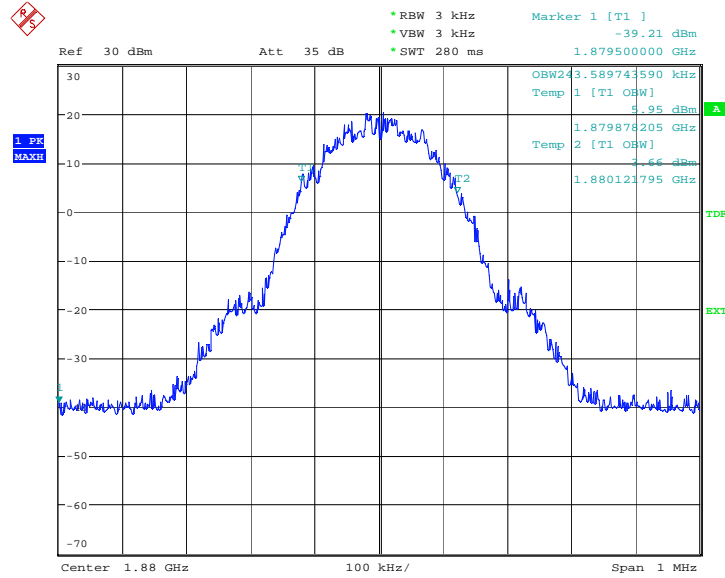

Date: 8.SEP.2008 02:05:20

Channel 810-Occupied Bandwidth (99%)

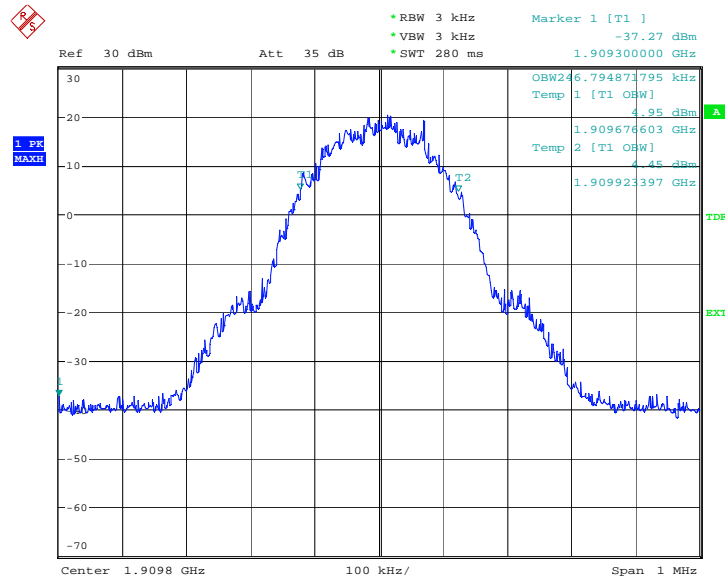


Date: 8.SEP.2008 02:06:12

GPRS

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
1850.2	245.192
1880.0	246.795
1909.8	243.590


GPRS

Channel 512-Occupied Bandwidth (99%)

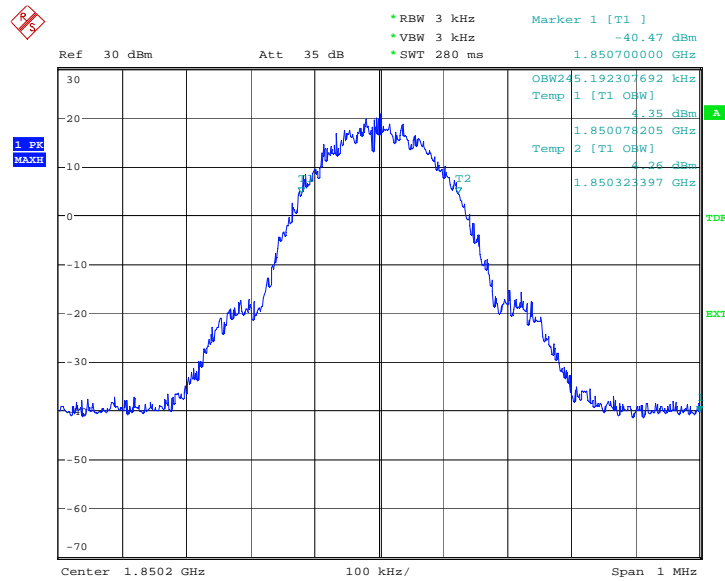


Date: 8.SEP.2008 02:51:18

Channel 661-Occupied Bandwidth (99%)

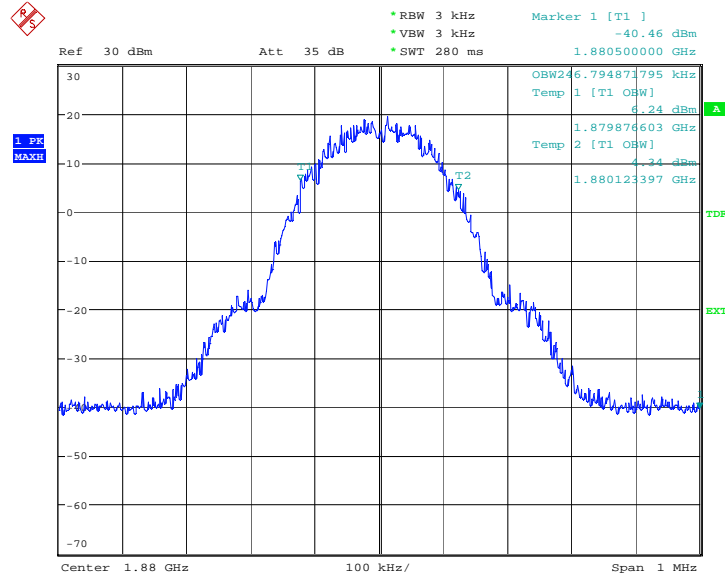

Date: 8.SEP.2008 02:50:37

Channel 810-Occupied Bandwidth (99%)

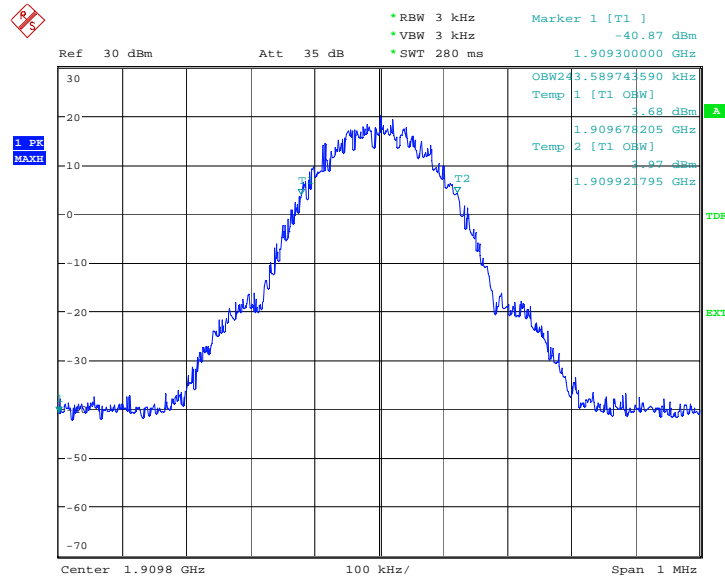


Date: 8.SEP.2008 02:50:04

EGPRS

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
1850.2	243.590
1880.0	246.795
1909.8	243.590


EGPRS

Channel 512-Occupied Bandwidth (99%)

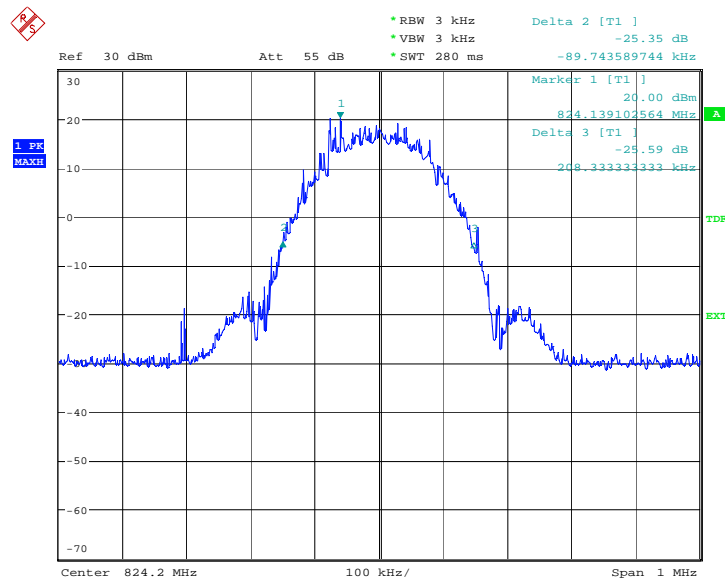


Date: 8.SEP.2008 03:13:54

Channel 661-Occupied Bandwidth (99%)

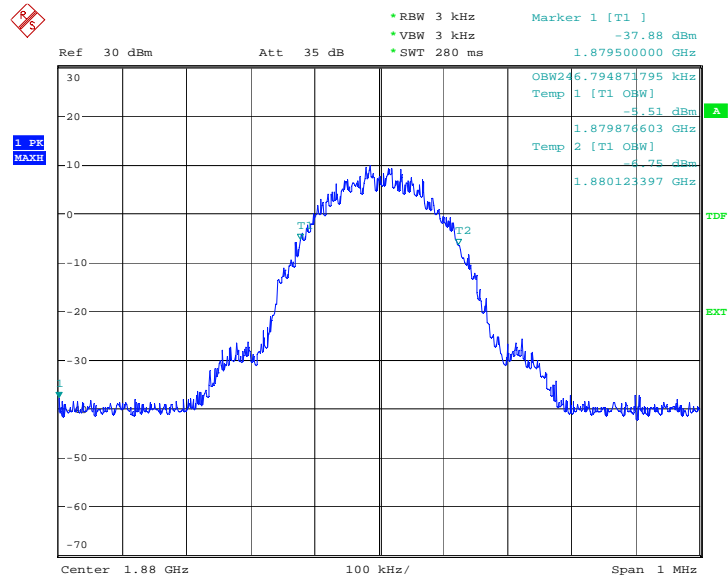

Date: 8.SEP.2008 03:20:06

Channel 810-Occupied Bandwidth (99%)

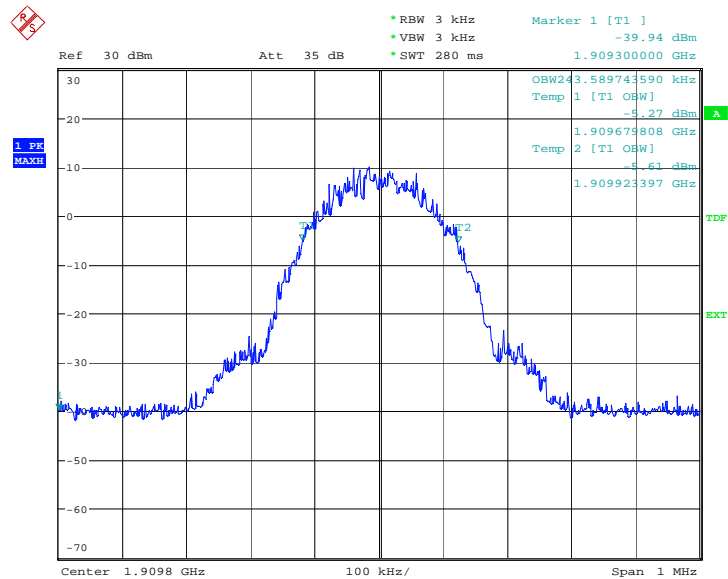


Date: 8.SEP.2008 03:20:37

WCDMA Band II

Frequency(MHz)	Occupied Bandwidth (99%)(MHz)
1852.40	4.183
1880.00	4.183
1907.60	4.183


WCDMA Band II

Channel 9262-Occupied Bandwidth (99%)

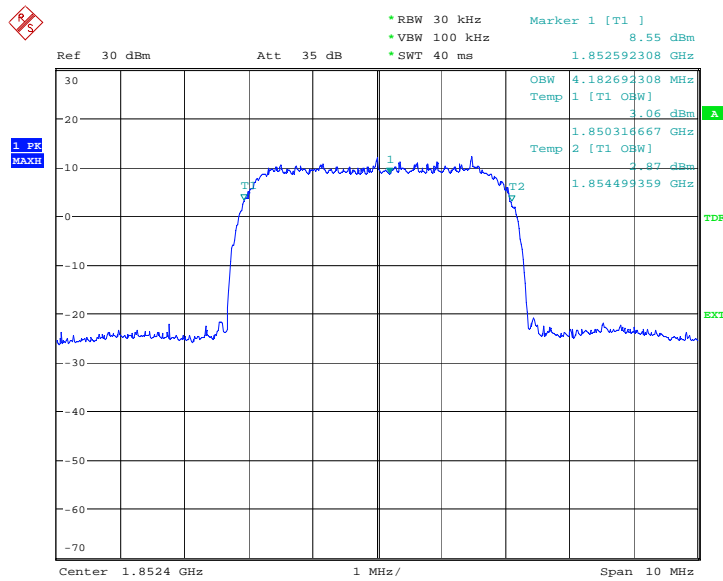


Date: 8.SEP.2008 06:24:54

Channel 9400-Occupied Bandwidth (99%)

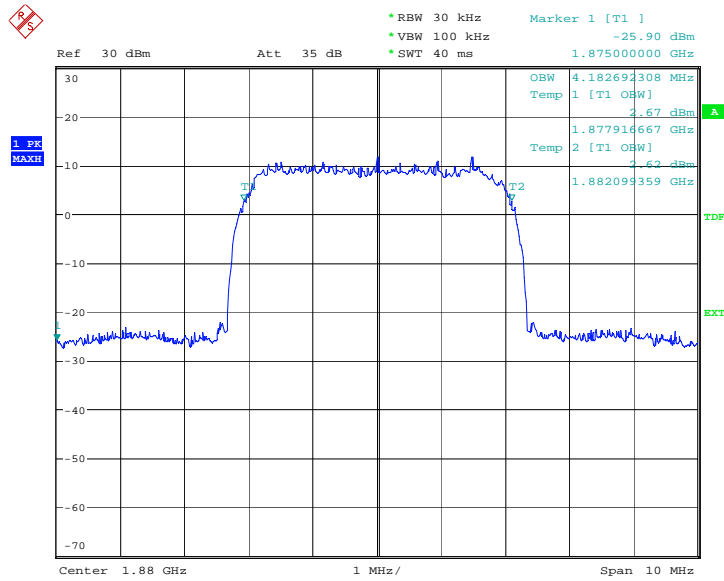

Date: 8.SEP.2008 06:25:57

Channel 9538-Occupied Bandwidth (99%)

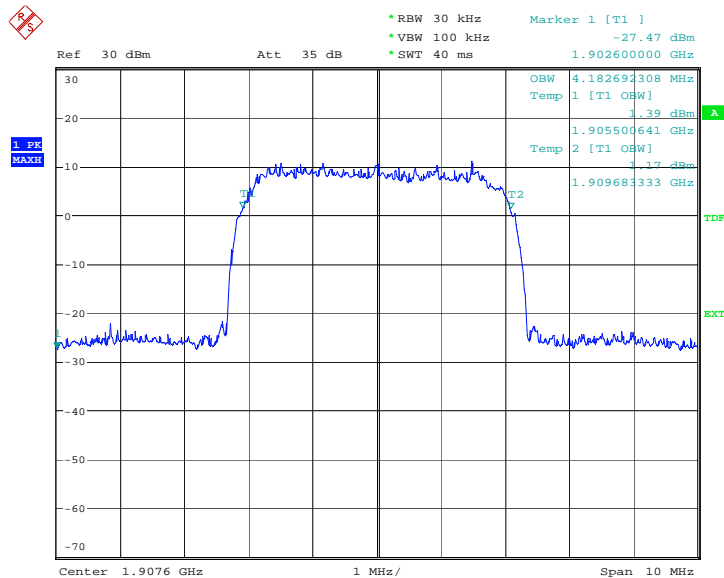


Date: 8.SEP.2008 06:26:53

WCDMA Band V

Frequency(MHz)	Occupied Bandwidth (99%)(MHz)
826.40	4.183
836.60	4.183
846.60	4.167


WCDMA Band V

Channel 4132-Occupied Bandwidth (99%)

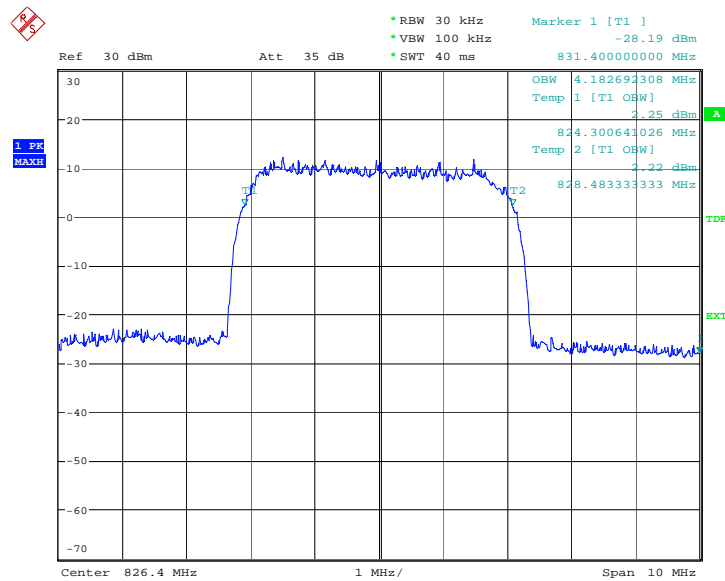


Date: 8.SEP.2008 06:28:16

Channel 4183-Occupied Bandwidth (99%)

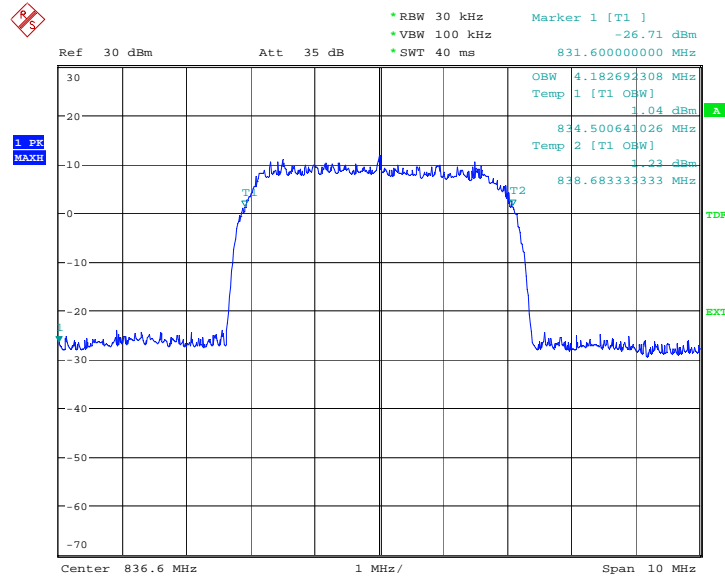

Date: 8.SEP.2008 06:28:48

Channel 4233-Occupied Bandwidth (99%)

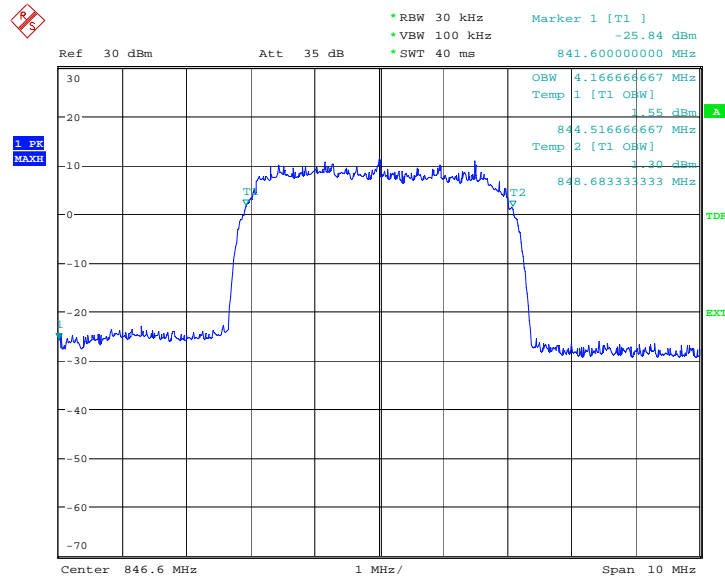

Date: 8.SEP.2008 06:29:37

B.7 EMISSION BANDWIDTH

B.7.1 Emission Bandwidth Results


Similar to conducted emissions; Emission bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the PCS1900 band and GSM850 band. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.

GSM 850(-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)(kHz)
824.2	306.090
836.6	307.692
848.8	307.692


GSM 850

Channel 128-Occupied Bandwidth (-26dBc BW)

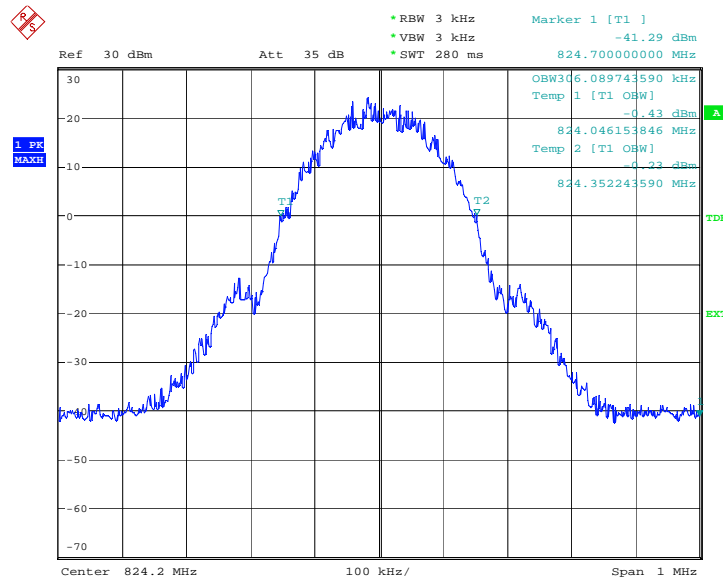


Date: 8.SEP.2008 02:10:12

Channel 190-Occupied Bandwidth (-26dBc BW)

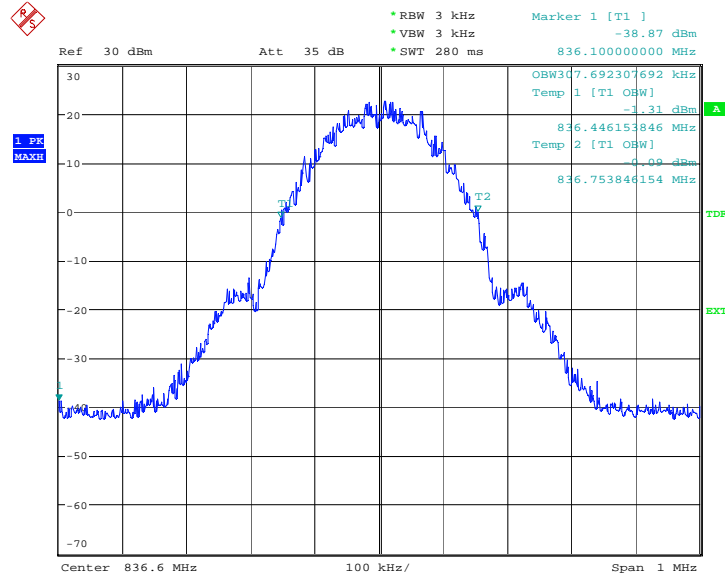

Date: 8.SEP.2008 02:10:36

Channel 251-Occupied Bandwidth (-26dBc BW)

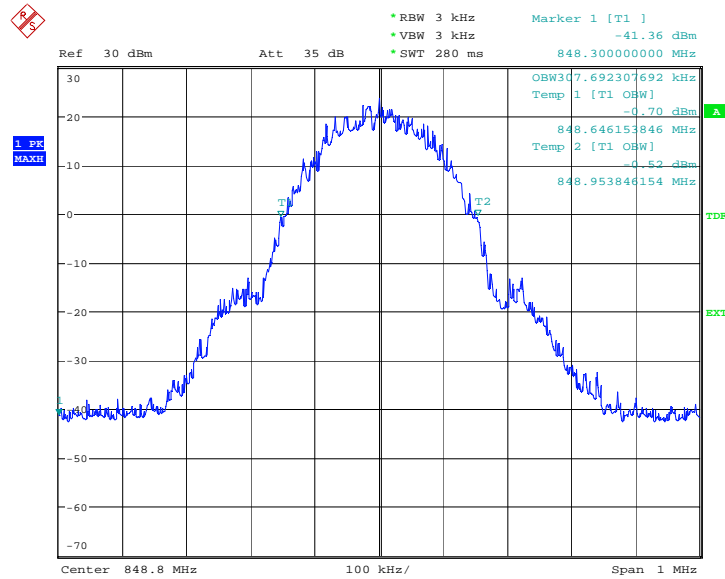


Date: 8.SEP.2008 02:11:03

GPRS

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)(kHz)
824.2	307.693
836.6	309.295
848.8	307.692


GPRS

Channel 128-Occupied Bandwidth (-26dBc BW)

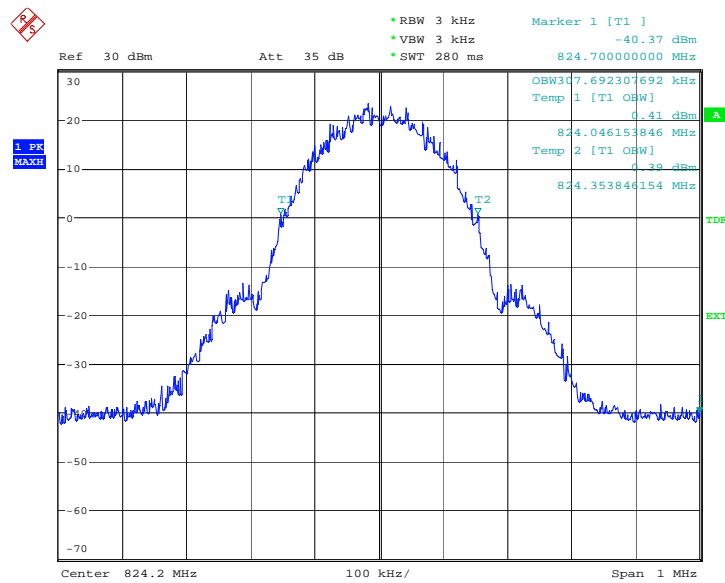


Date: 8.SEP.2008 02:44:10

Channel 190-Occupied Bandwidth (-26dBc BW)

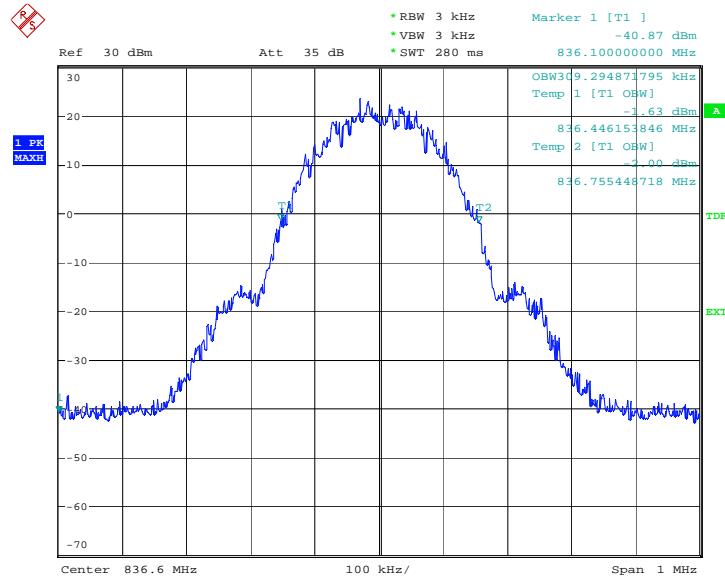

Date: 8.SEP.2008 02:44:40

Channel 251-Occupied Bandwidth (-26dBc BW)

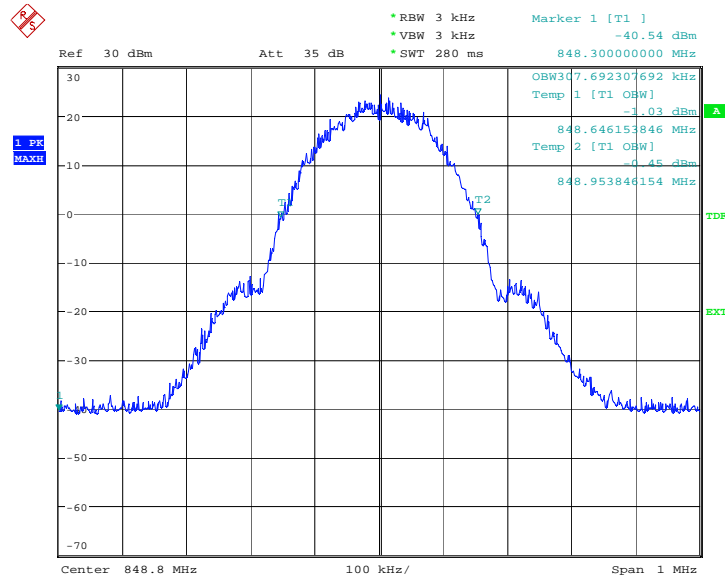


Date: 8.SEP.2008 02:45:53

EGPRS

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)(kHz)
824.2	301.282
836.6	301.282
848.8	294.871


EGPRS

Channel 128-Occupied Bandwidth (-26dBc BW)

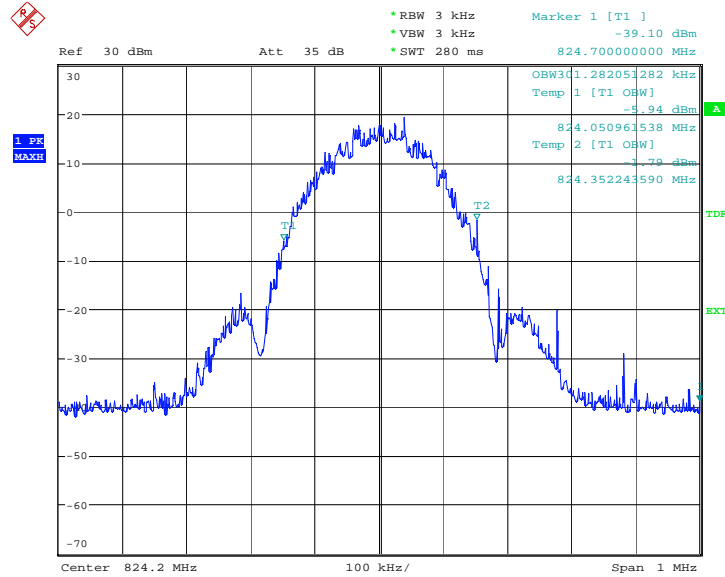


Date: 8.SEP.2008 03:21:21

Channel 190-Occupied Bandwidth (-26dBc BW)

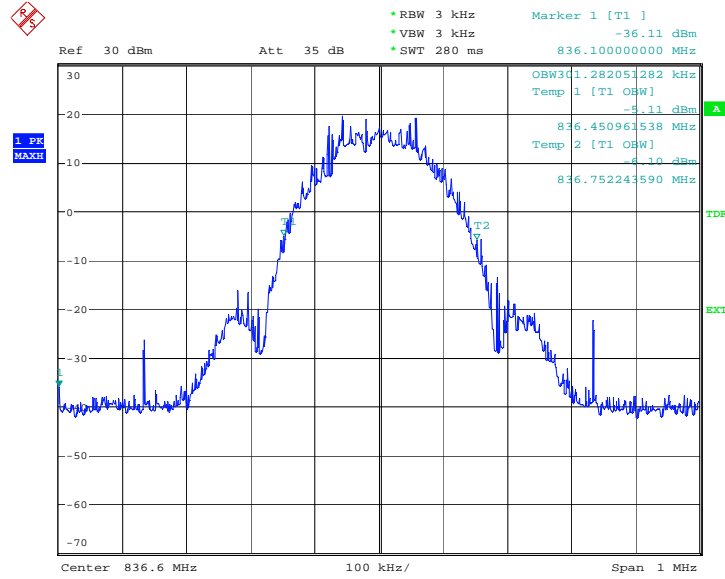

Date: 8.SEP.2008 03:21:54

Channel 251-Occupied Bandwidth (-26dBc BW)

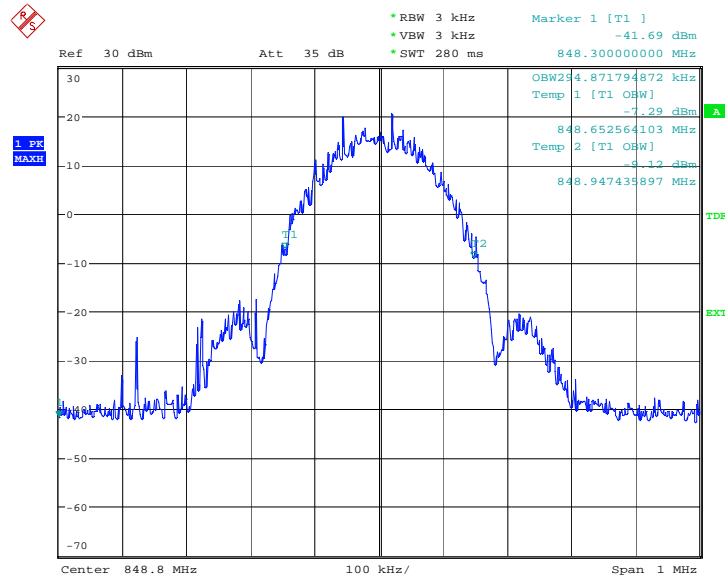


Date: 8.SEP.2008 03:22:25

PCS 1900(-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)(kHz)
1850.2	307.692
1880.0	307.692
1909.8	307.692


PCS 1900

Channel 512-Occupied Bandwidth (-26dBc BW)

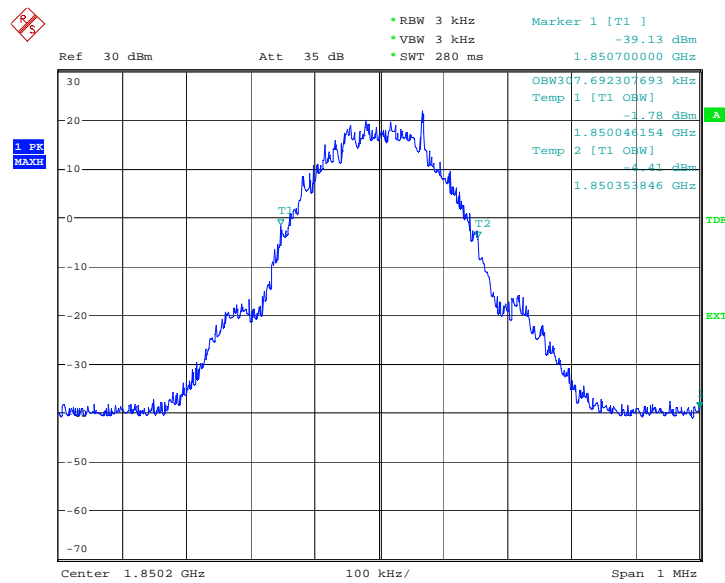


Date: 8.SEP.2008 02:07:05

Channel 661-Occupied Bandwidth (-26dBc BW)

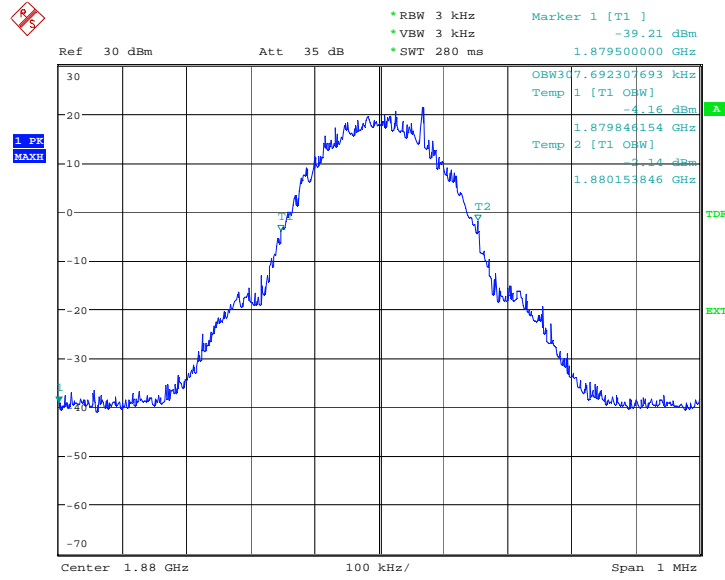

Date: 8.SEP.2008 02:08:26

Channel 810-Occupied Bandwidth (-26dBc BW)

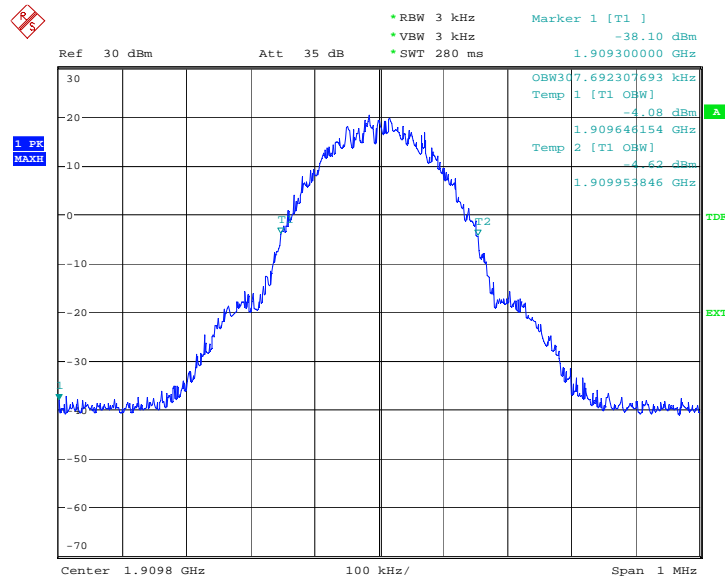


Date: 8.SEP.2008 02:09:33

GPRS

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)(kHz)
1850.2	309.295
1880.0	307.692
1909.8	309.295


GPRS

Channel 512-Occupied Bandwidth (-26dBc BW)

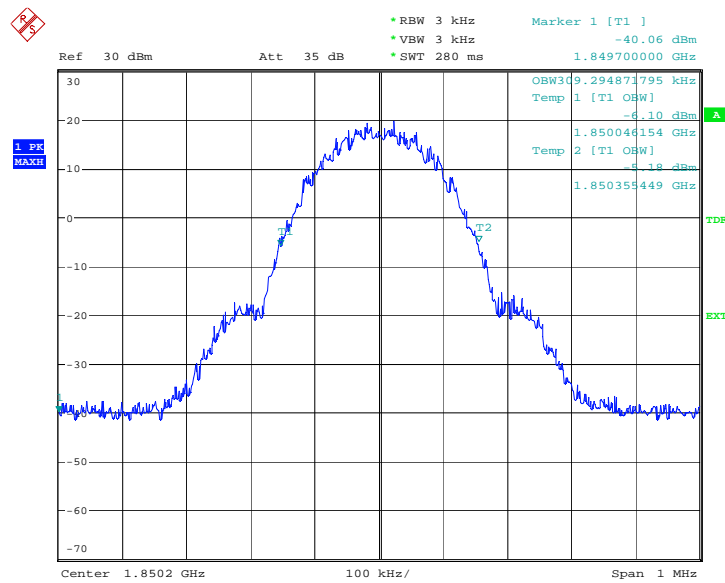


Date: 8.SEP.2008 02:46:53

Channel 661-Occupied Bandwidth (-26dBc BW)

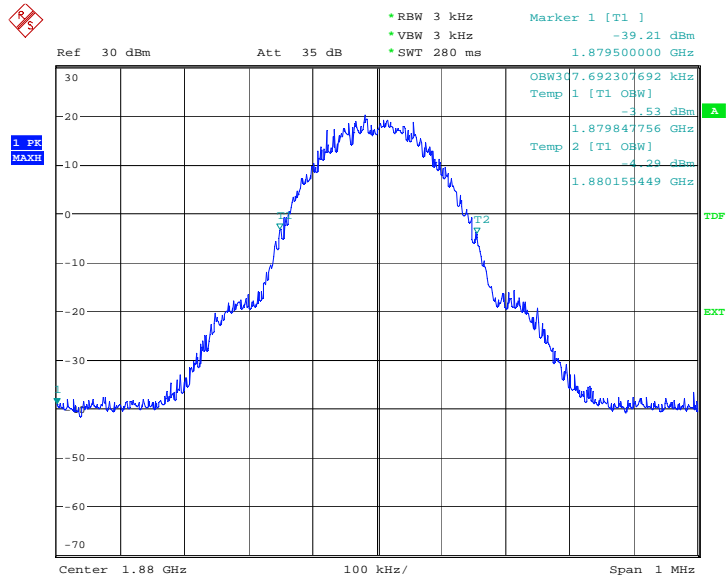

Date: 8.SEP.2008 02:47:56

Channel 810-Occupied Bandwidth (-26dBc BW)

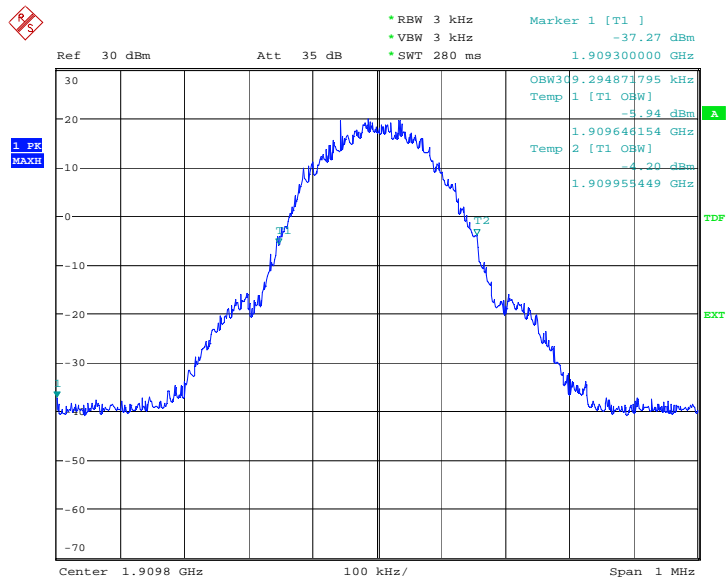


Date: 8.SEP.2008 02:49:02

EGPRS

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)(kHz)
1850.2	310.897
1880.0	310.897
1909.8	307.692


EGPRS

Channel 512-Occupied Bandwidth (-26dBc BW)

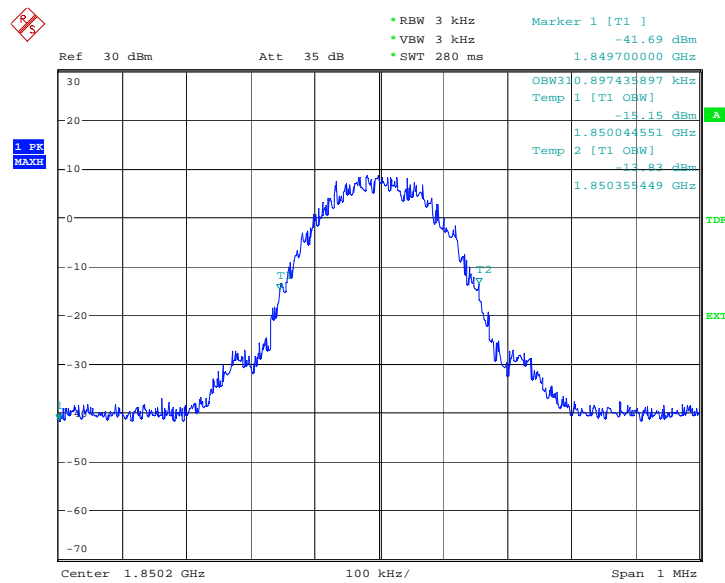


Date: 8.SEP.2008 03:23:02

Channel 661-Occupied Bandwidth (-26dBc BW)

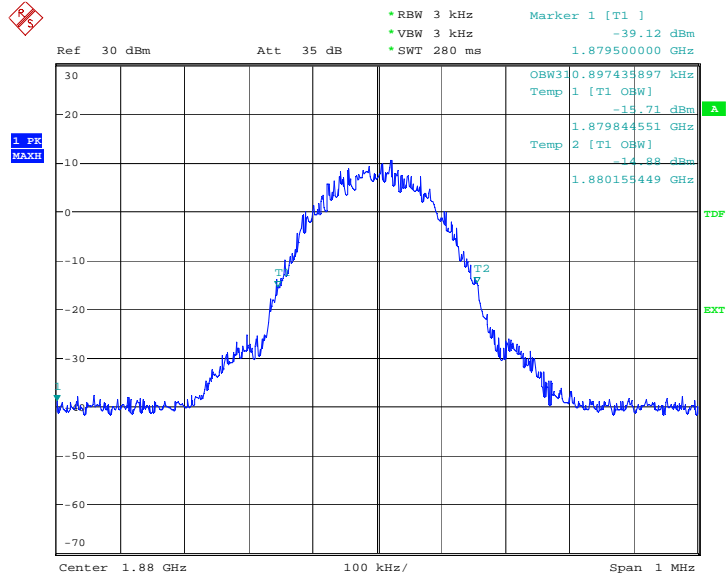

Date: 8.SEP.2008 03:23:40

Channel 810-Occupied Bandwidth (-26dBc BW)

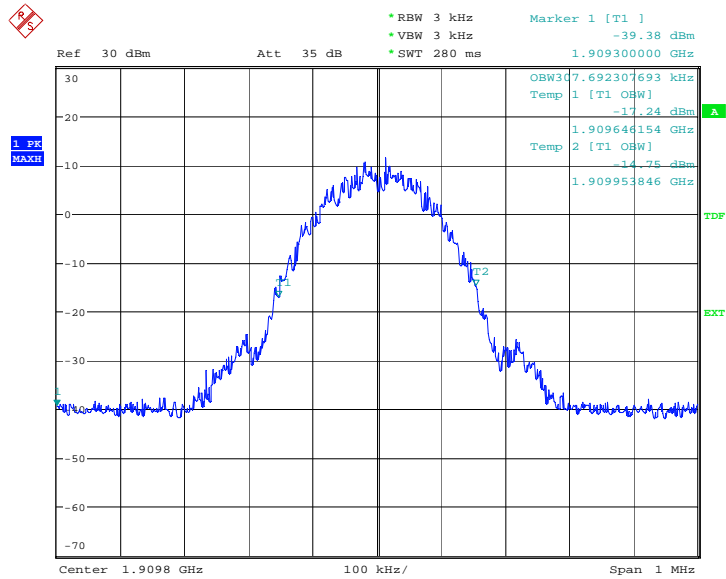


Date: 8.SEP.2008 03:24:11

WCDMA Band II

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)(MHz)
1852.40	4.519
1880.00	4.503
1907.60	4.503


WCDMA Band II

Channel 9262-Occupied Bandwidth (-26dBc BW)

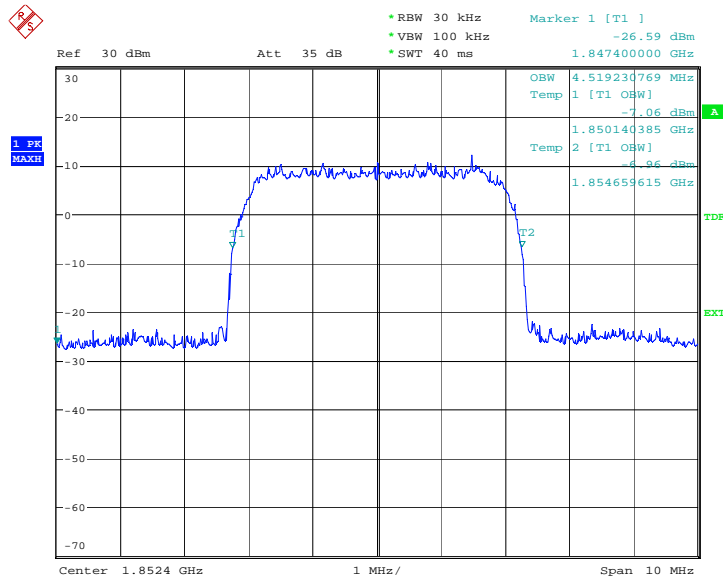


Date: 8.SEP.2008 06:32:17

Channel 9400-Occupied Bandwidth (-26dBc BW)

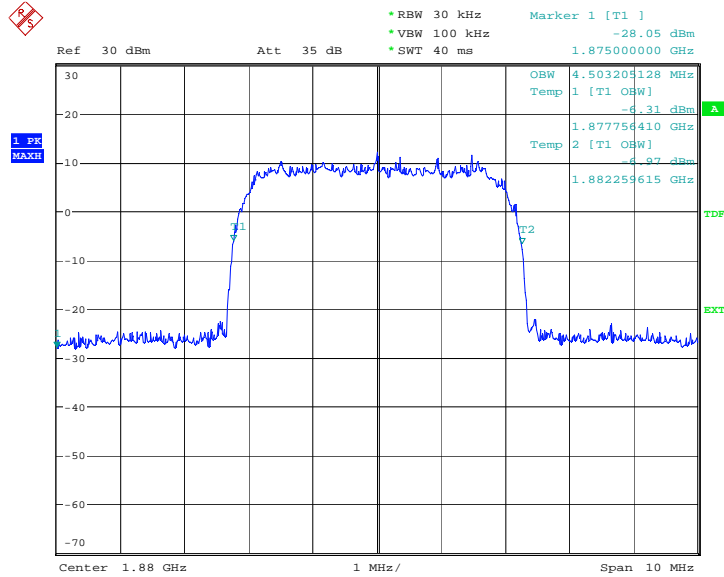

Date: 8.SEP.2008 06:34:15

Channel 9538-Occupied Bandwidth (-26dBc BW)

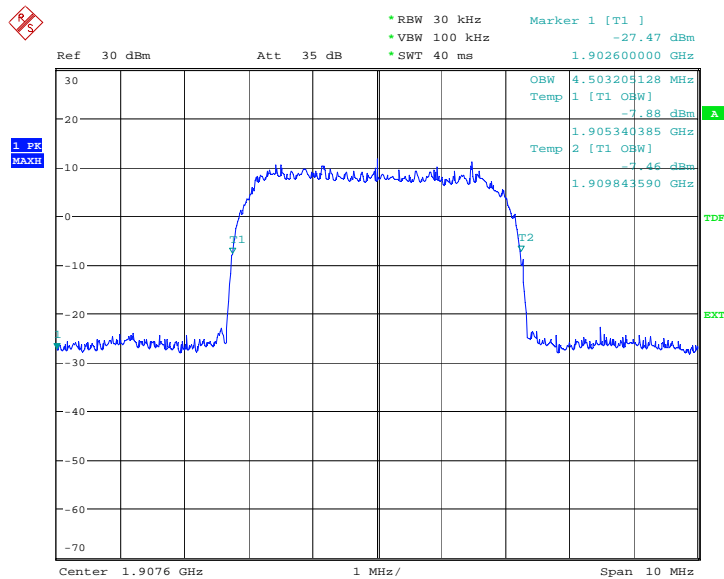


Date: 8.SEP.2008 06:34:57

WCDMA Band V

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)(MHz)
826.40	4.503
836.60	4.503
846.60	4.503


WCDMA Band V

Channel 4132-Occupied Bandwidth (-26dBc BW)

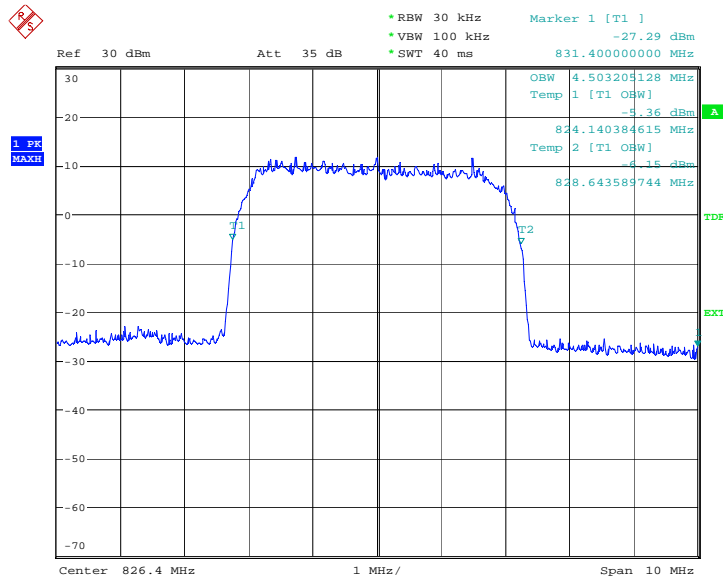


Date: 8.SEP.2008 06:31:35

Channel 4183-Occupied Bandwidth (-26dBc BW)

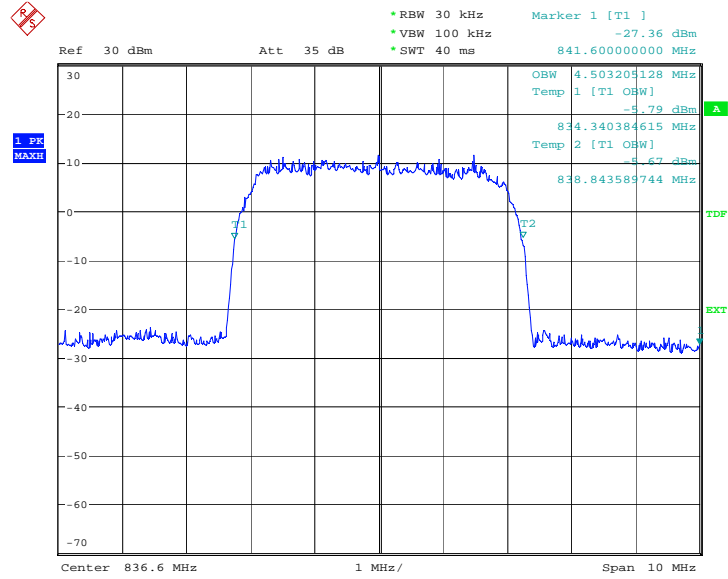

Date: 8.SEP.2008 06:31:05

Channel 4233-Occupied Bandwidth (-26dBc BW)

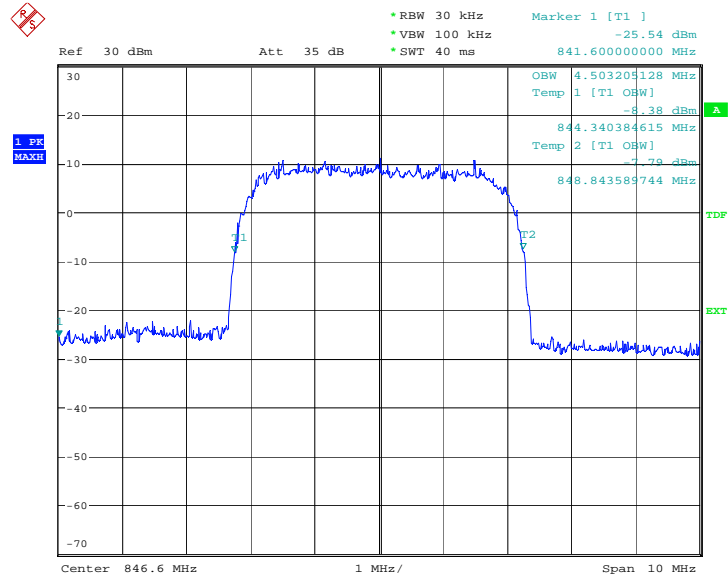


Date: 8.SEP.2008 06:30:09

B.9 BAND EDGE COMPLIANCE


GSM850

LOW BAND EDGE BLOCK-A (GSM850)-Channel 128

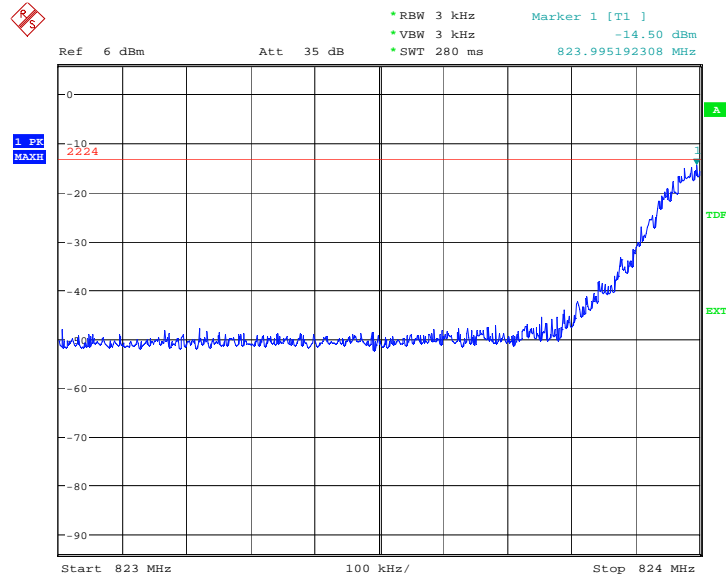


Date: 8.SEP.2008 02:37:33

HIGH BAND EDGE BLOCK-C (GSM850) -Channel 251

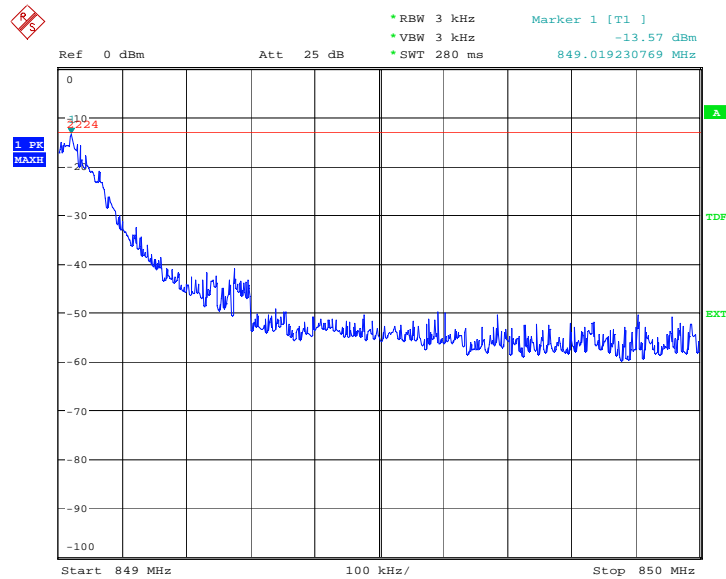


Date: 8.SEP.2008 02:38:40

GPRS
LOW BAND EDGE BLOCK-A (GSM850)-Channel 128

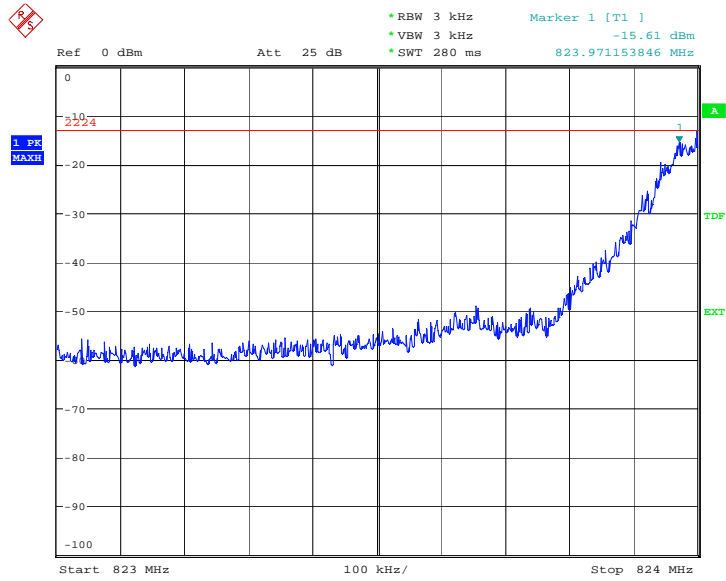


Date: 8.SEP.2008 02:41:50

HIGH BAND EDGE BLOCK-C (GSM850) –Channel 251

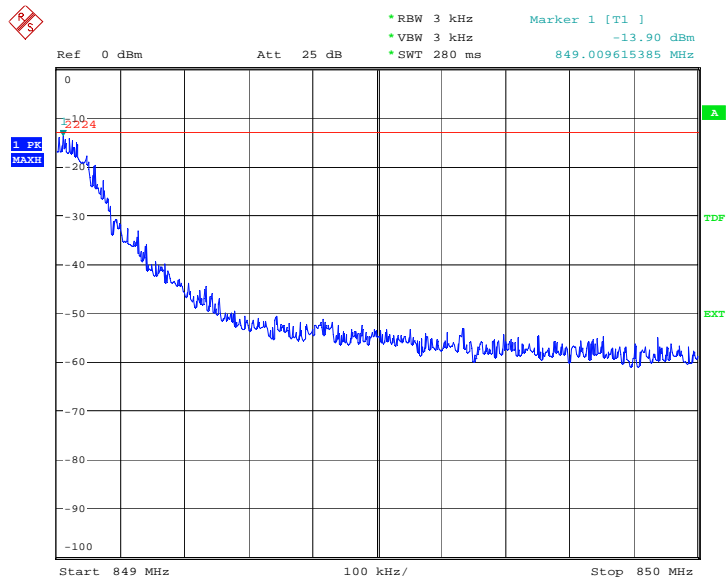


Date: 8.SEP.2008 02:42:23

EGPRS
LOW BAND EDGE BLOCK-A (GSM850)-Channel 128

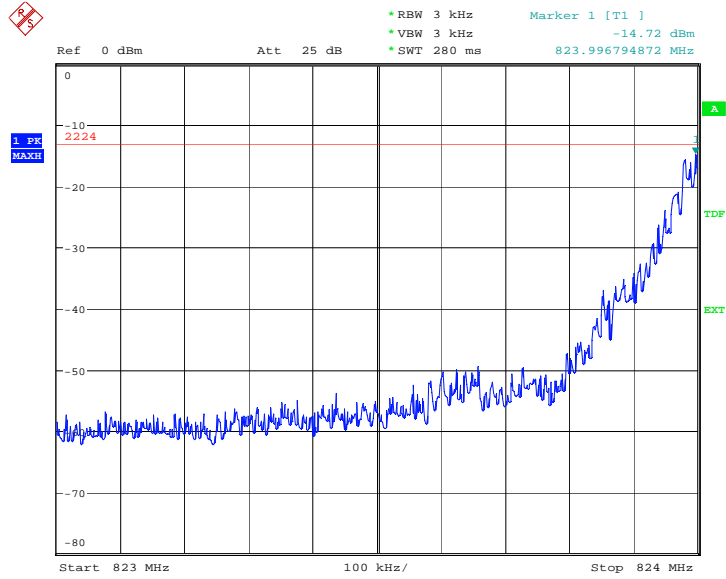


Date: 8.SEP.2008 03:26:54

HIGH BAND EDGE BLOCK-C (GSM850) -Channel 251

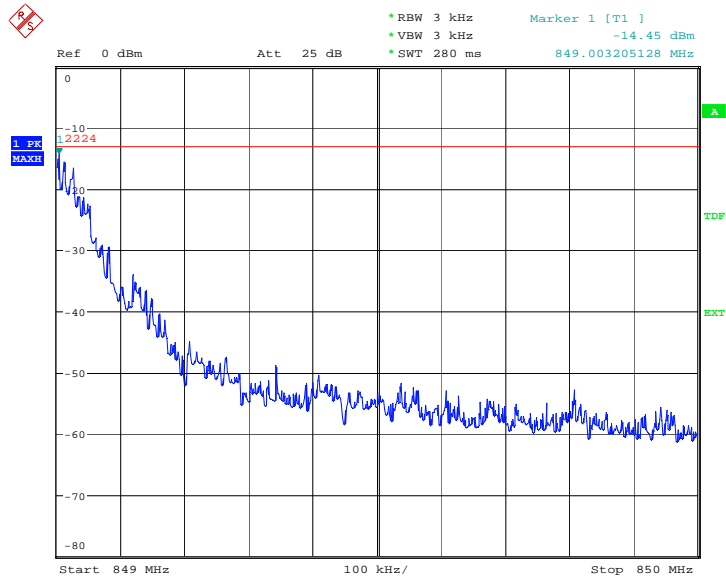


Date: 8.SEP.2008 03:27:30

PCS 1900
LOW BAND EDGE BLOCK-A (PCS-1900)-Channel 512

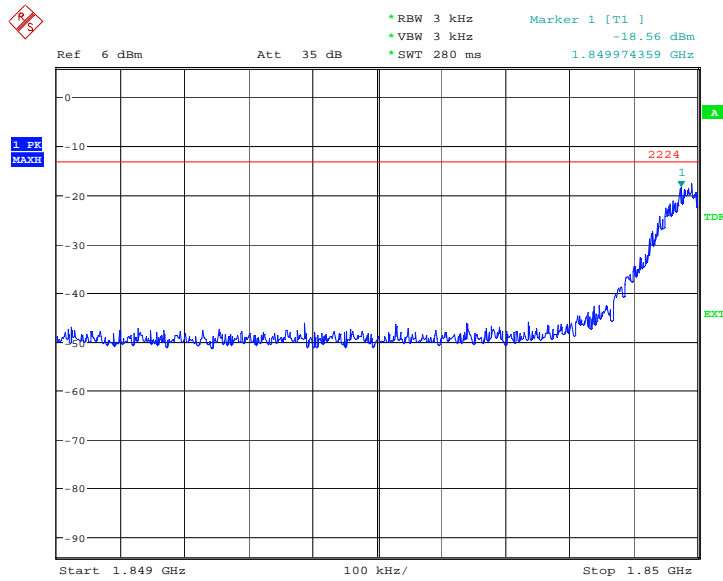


Date: 8.SEP.2008 02:36:16

HIGH BAND EDGE BLOCK-C (PCS-1900) –Channel 810

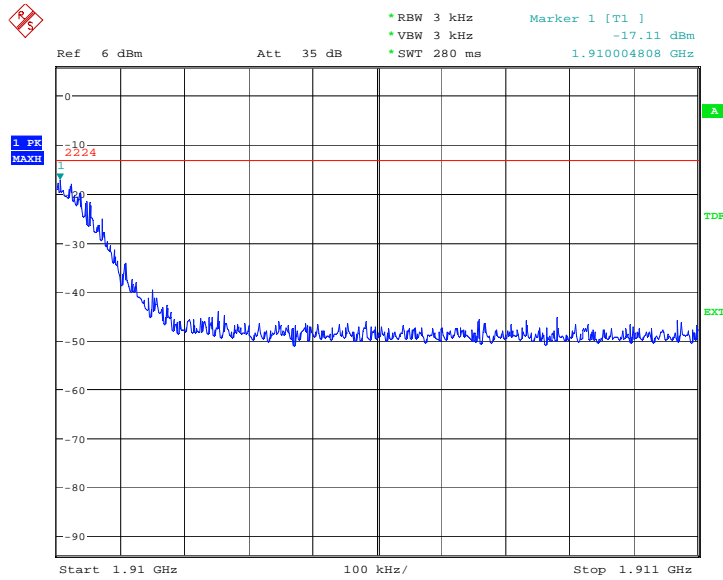


Date: 8.SEP.2008 02:36:39

GPRS
LOW BAND EDGE BLOCK-A (PCS-1900)-Channel 512

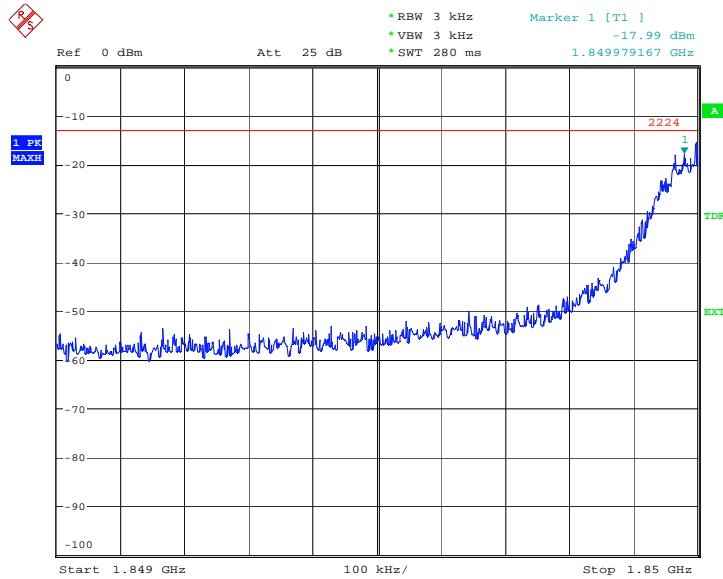


Date: 8.SEP.2008 02:40:19

HIGH BAND EDGE BLOCK-C (PCS-1900) -Channel 810

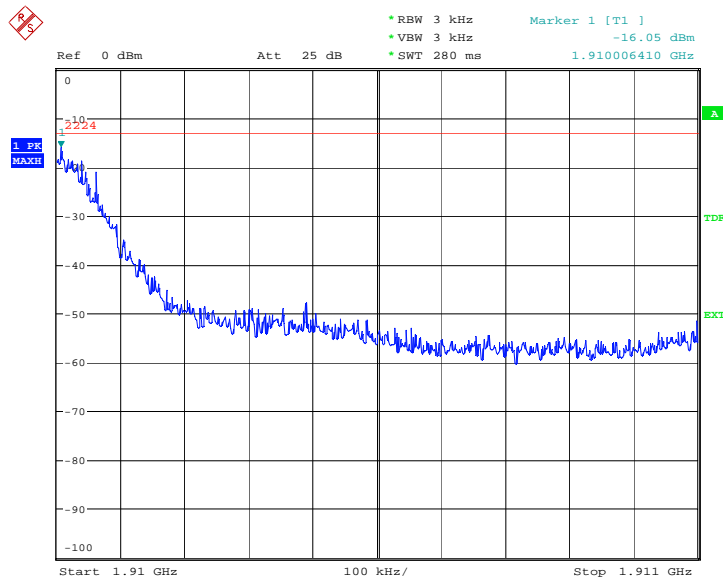


Date: 8.SEP.2008 02:40:50

**EGPRS
LOW BAND EDGE BLOCK-A (PCS-1900)-Channel 512**

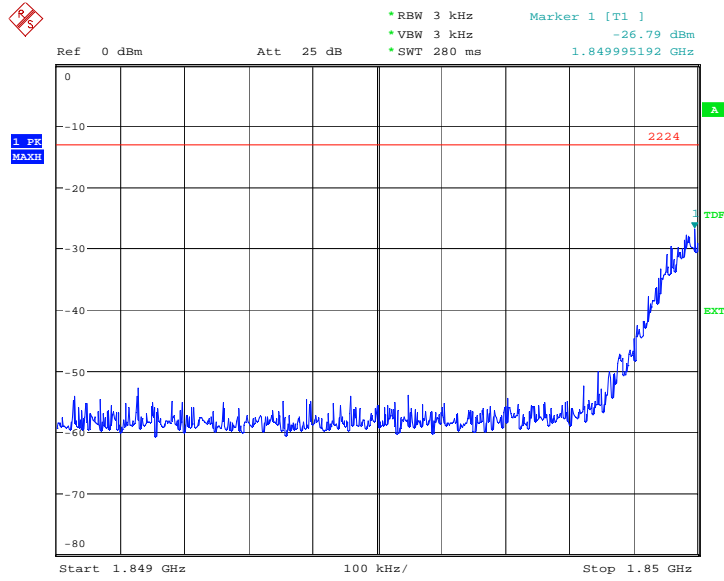


Date: 8.SEP.2008 03:25:57

HIGH BAND EDGE BLOCK-C (PCS-1900) –Channel 810

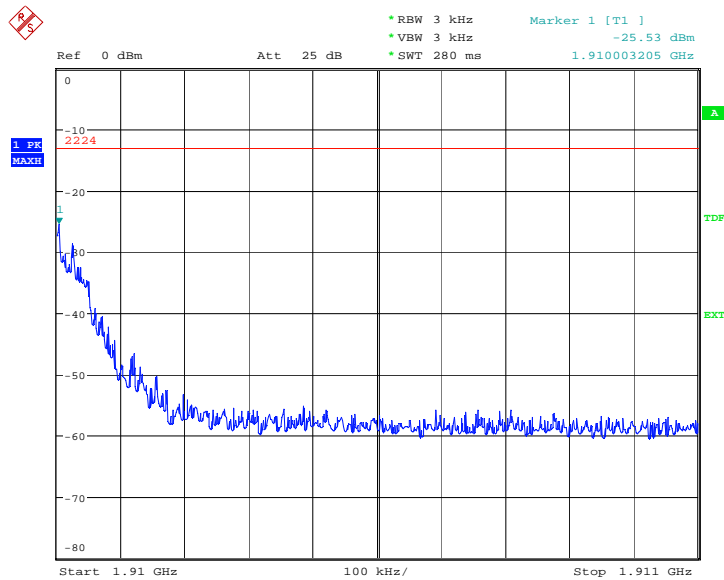


Date: 8.SEP.2008 03:26:26

WCDMA Band II
LOW BAND EDGE BLOCK-A (WCDMA Band II)-Channel 9262

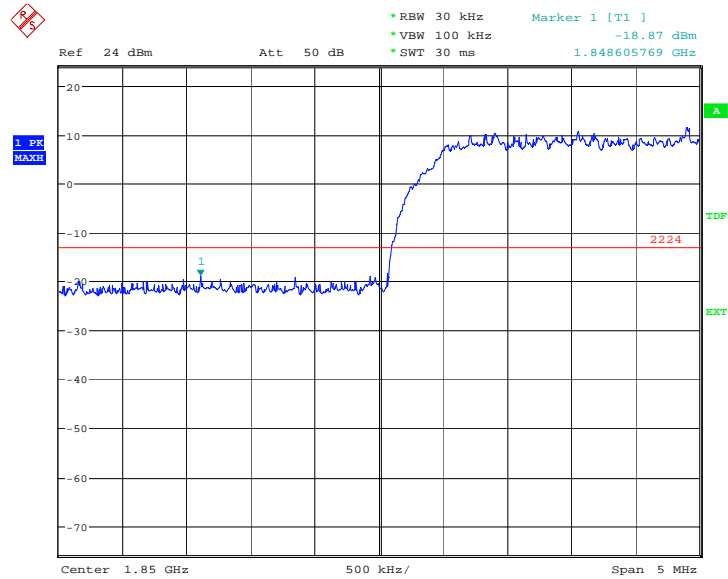


Date: 8.SEP.2008 06:57:59

HIGH BAND EDGE BLOCK-C (WCDMA Band II) -Channel 9538

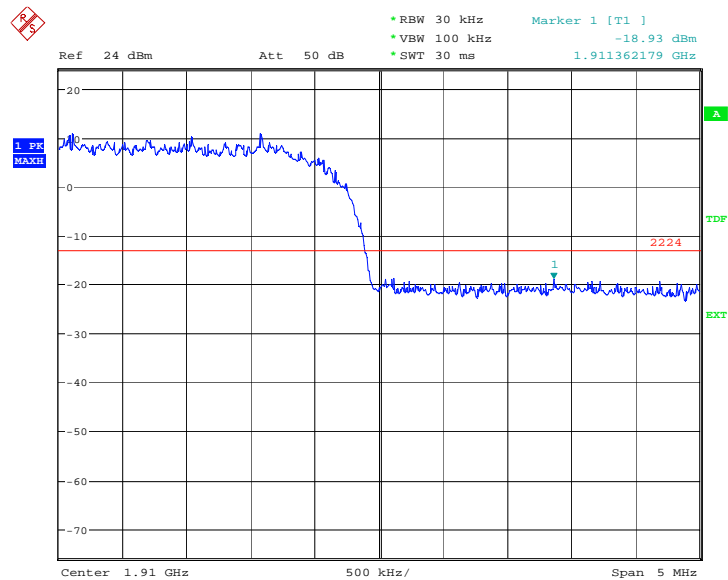


Date: 8.SEP.2008 06:58:51

WCDMA Band V
LOW BAND EDGE BLOCK-A (WCDMA Band V)-Channel 4132

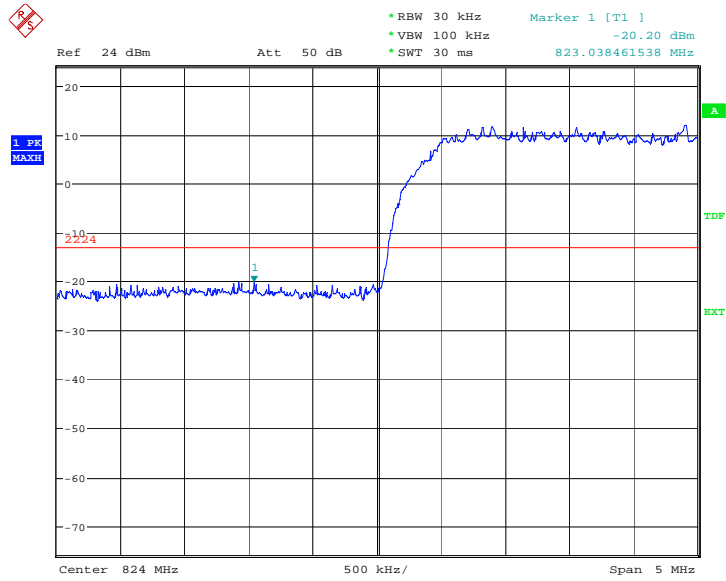

Date: 8.SEP.2008 06:56:20

HIGH BAND EDGE BLOCK-C (WCDMA Band V) -Channel 4233

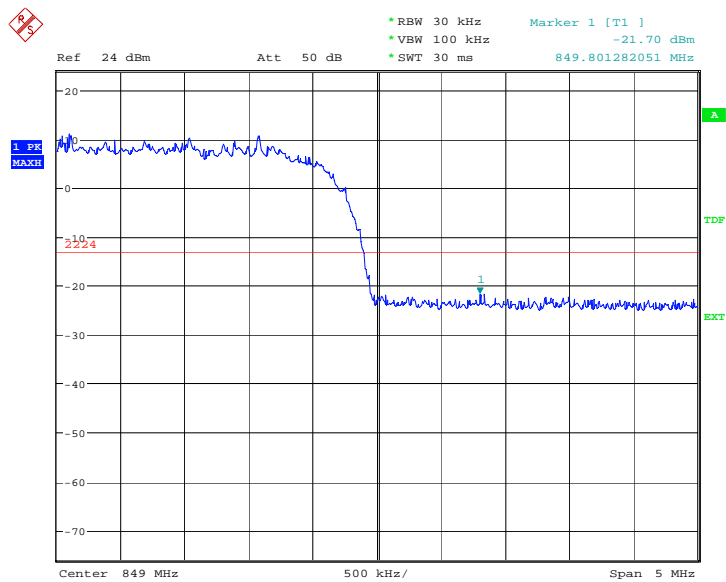

Date: 8.SEP.2008 06:57:01

B.10 CONDUCTED SPURIOUS EMISSION

B.10.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 9 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

GSM850 Transmitter

Channel	Frequency (MHz)
128	824.2
190	836.6
251	848.8

PCS1900 Transmitter

Channel	Frequency (MHz)
512	1850.2
661	1880.0
810	1909.8

WCDMA Band II Transmitter

Channel	Frequency (MHz)
9262	1852.40
9400	1880.00
9538	1907.60

WCDMA Band V Transmitter

Channel	Frequency (MHz)
4132	826.40
4183	836.60
4233	846.60

B.10.2 Measurement Limit

Sec. 24.238 Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

B.10.3 Measurement result
GSM850


Harmonic	Tx ch. 128 Freq. (MHz)	Level (dBm)	Tx ch. 190 Freq. (MHz)	Level (dBm)	Tx ch. Freq. (MHz) 251	Level (dBm)
2	1648.4	nf	1673.2	nf	1697.6	nf
3	2472.6	nf	2509.8	nf	2546.4	nf
4	3296.8	nf	3346.4	nf	3395.2	nf
5	4121	nf	4183	nf	4244	nf
6	4945.2	nf	5019.6	nf	5092.8	nf
7	5769.4	nf	5856.2	nf	5941.6	nf
8	6593.6	nf	6692.8	nf	6790.4	nf
9	7417.8	nf	7529.4	nf	7639.2	nf
10	8242	nf	8366	nf	8488	nf

nf: Noise floor

B.10.3.1 Channel 128: 30MHz – 4GHz


Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

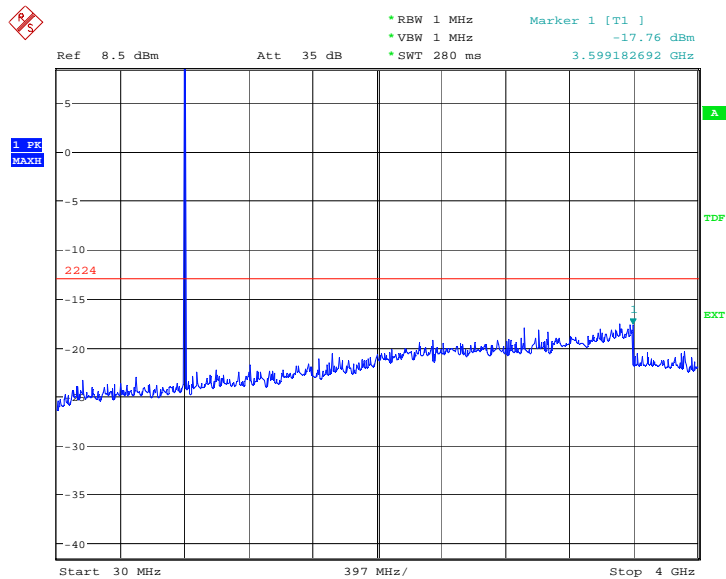

Date: 8.SEP.2008 02:26:02


B.10.3.2 Channel 128: 4GHz – 10GHz
Spurious emission limit –13dBm.

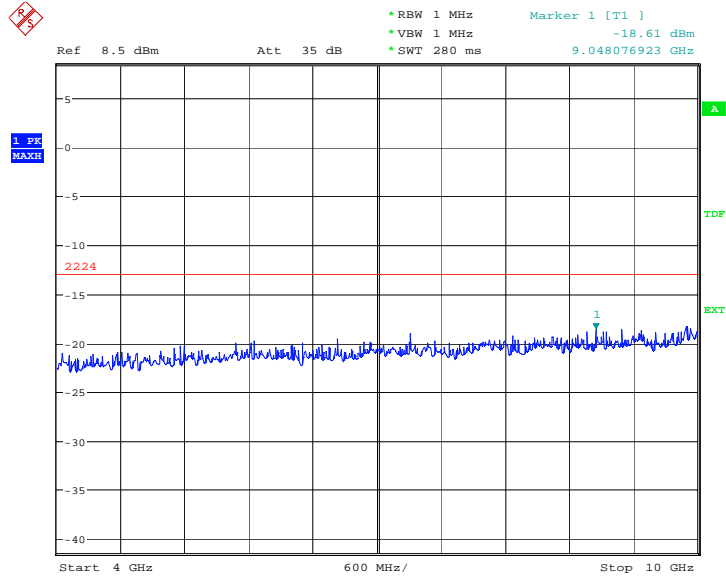

Date: 8.SEP.2008 02:26:31


B.10.3.3 Channel 190: 30MHz – 4GHz
Spurious emission limit –13dBm

NOTE: peak above the limit line is the carrier frequency.

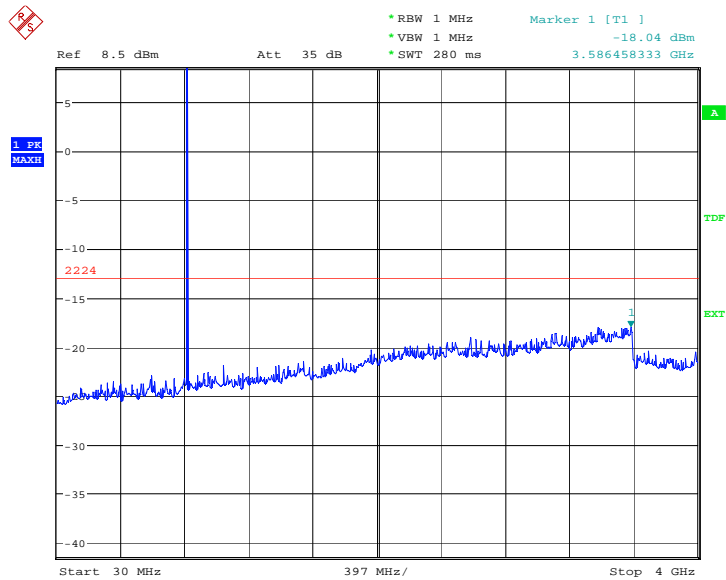

Date: 8.SEP.2008 02:27:12


B.10.3.4 Channel 190: 4GHz –10GHz
Spurious emission limit –13dBm

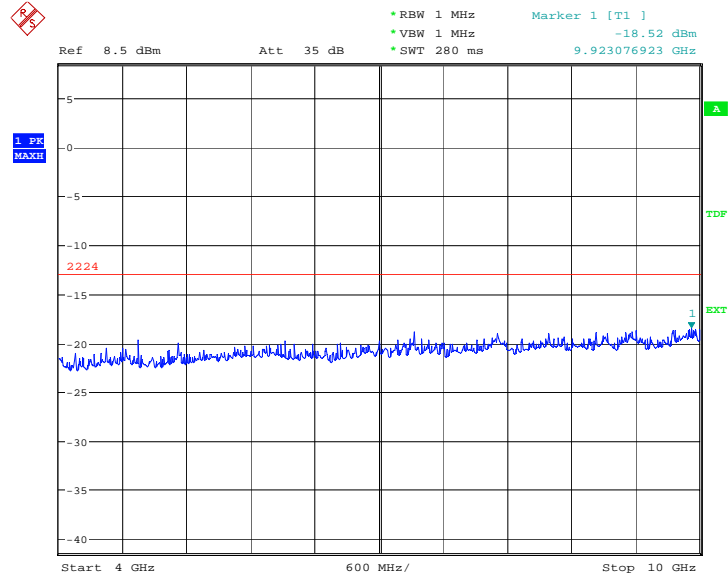

Date: 8.SEP.2008 02:27:47


B.10.3.5 Channel 251: 30MHz – 4GHz
Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

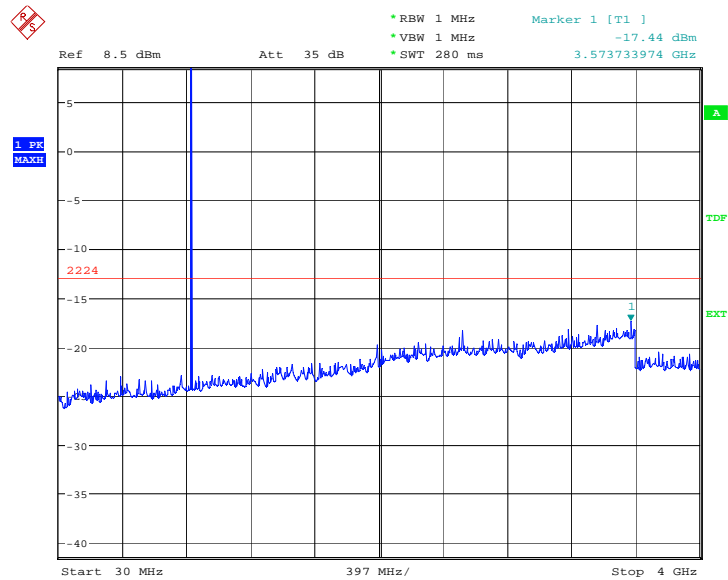


Date: 8.SEP.2008 02:28:15

B.10.3.6 Channel 251: 4GHz – 10GHz
Spurious emission limit –13dBm.

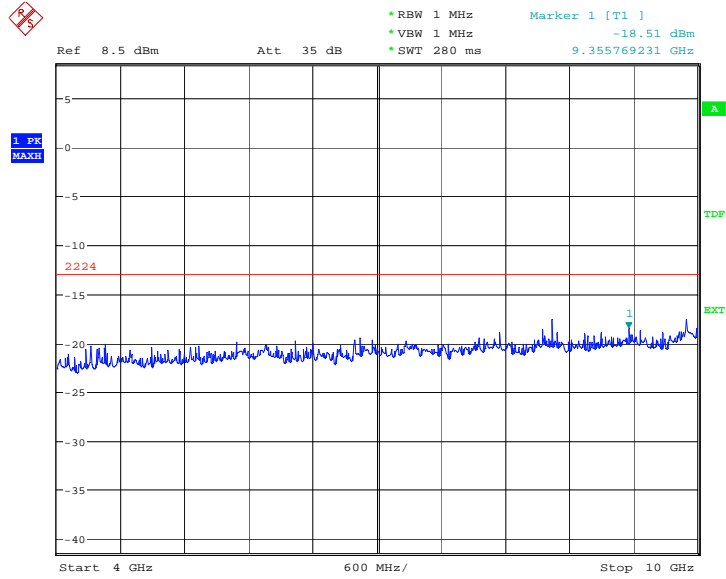

Date: 8.SEP.2008 02:28:48


B.10.3.7 Idle mode: 30MHz – 4GHz
Spurious emission limit –13dBm.

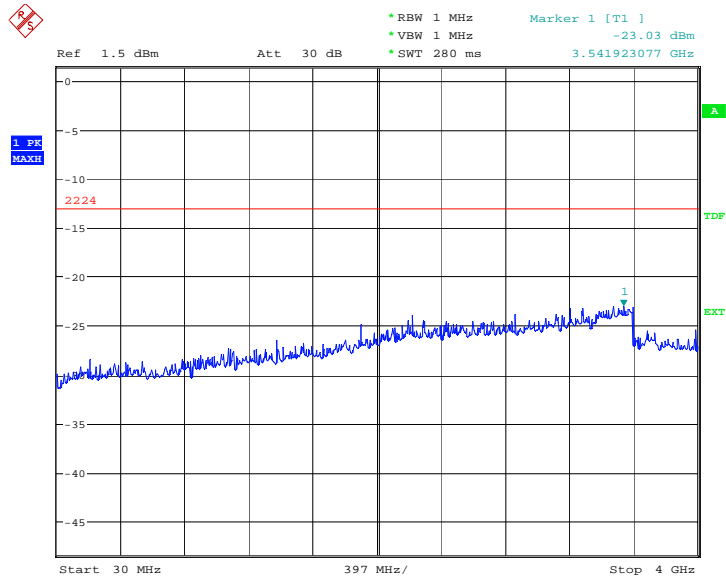

Date: 8.SEP.2008 02:33:02

B.10.3.8 Idle mode: 4GHz – 10GHz

Spurious emission limit -13dBm.

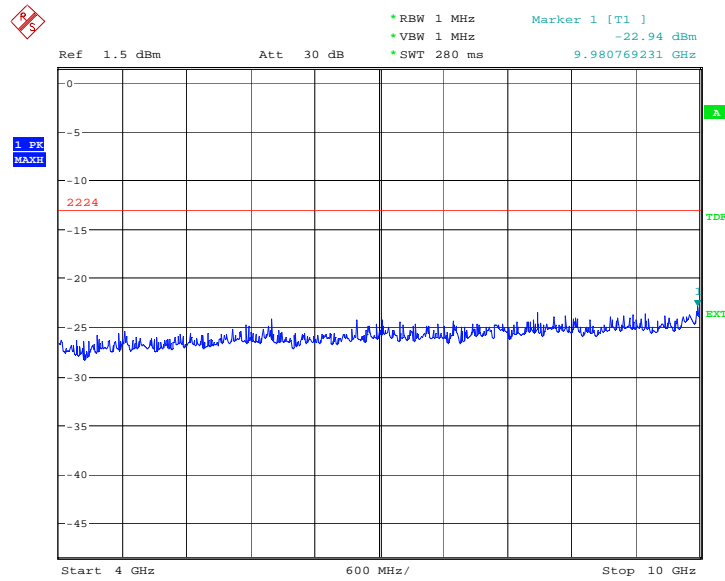

Date: 8.SEP.2008 02:33:46

PCS1900


Harmonic	Tx ch. 512 Freq. (MHz)	Level (dBm)	Tx ch. 661 Freq. (MHz)	Level (dBm)	Tx ch. 810 Freq. (MHz)	Level (dBm)
2	3700.4	nf	3760	nf	3819.6	nf
3	5550.6	nf	5640	nf	5729.4	nf
4	7400.8	nf	7520	nf	7639.2	nf
5	9251.0	nf	9400	nf	9549.0	nf
6	11101.2	nf	11280	nf	11458.8	nf
7	12951.4	nf	13160	nf	13368.6	nf
8	14801.6	nf	15040	nf	15278.4	nf
9	16651.8	nf	16920	nf	17188.2	nf
10	18502.0	nf	18800	nf	19098.0	nf

nf: Noise floor

B.10.3.9 Channel 512: 30MHz – 4GHz


Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

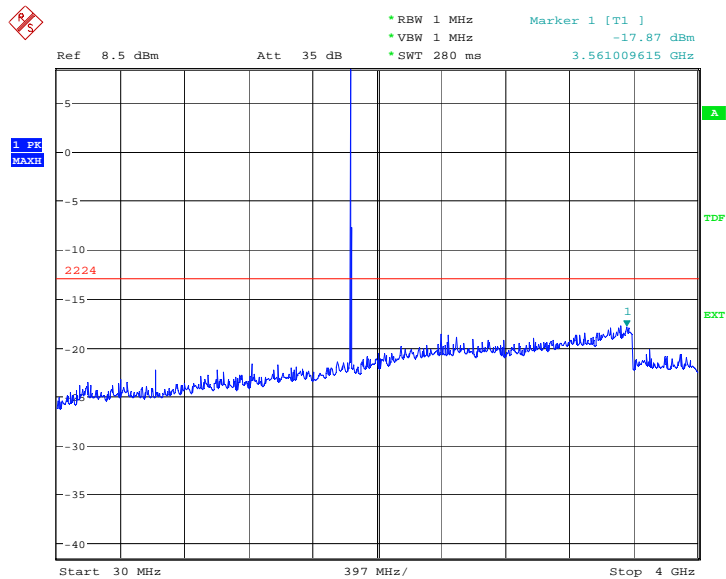

Date: 8.SEP.2008 02:29:45


B.10.3.10 Channel 512: 4GHz – 20GHz
Spurious emission limit –13dBm.

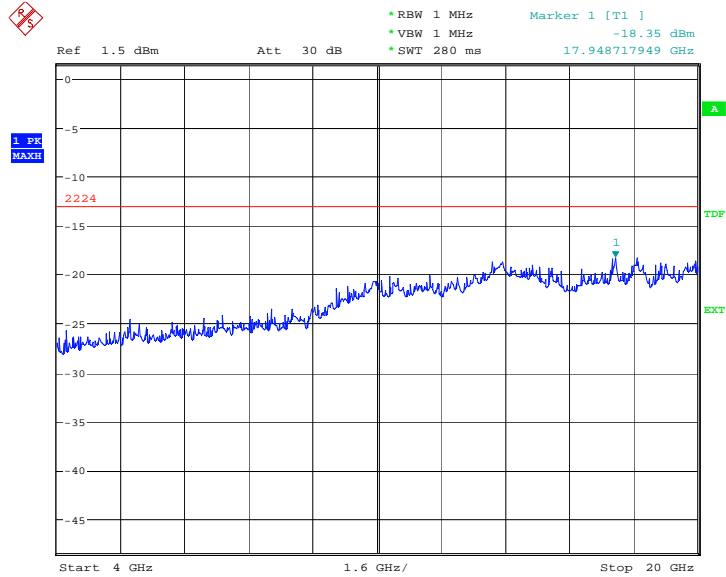

Date: 8.SEP.2008 02:30:16


B.10.3.11 Channel 661: 30MHz – 4GHz
Spurious emission limit –13dBm

NOTE: peak above the limit line is the carrier frequency.

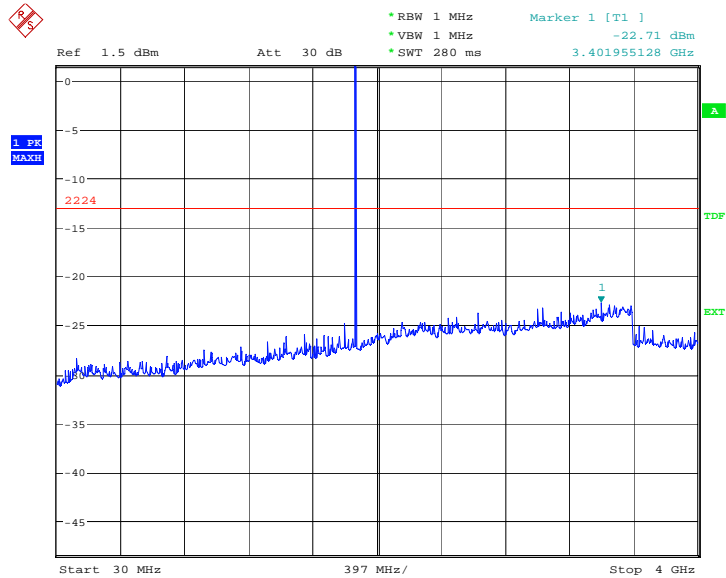

Date: 8.SEP.2008 02:30:54


B.10.3.12 Channel 661: 4GHz –20GHz
Spurious emission limit –13dBm

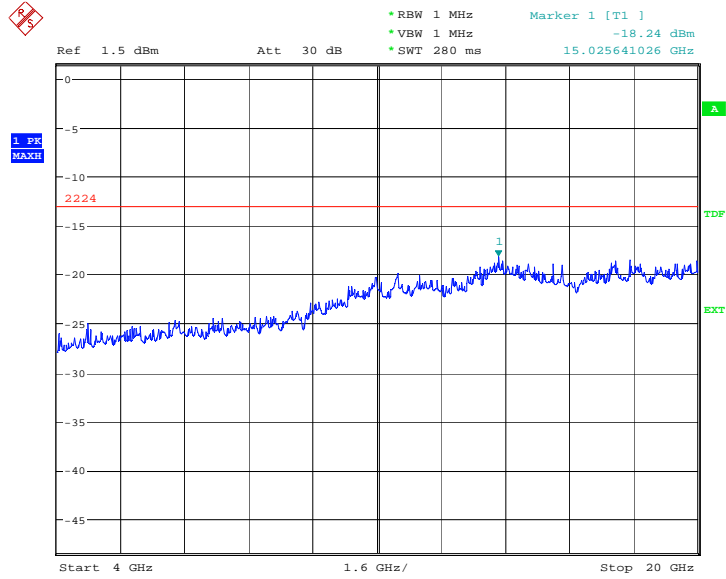

Date: 8.SEP.2008 02:31:21


B.10.3.13 Channel 810: 30MHz – 4GHz
Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

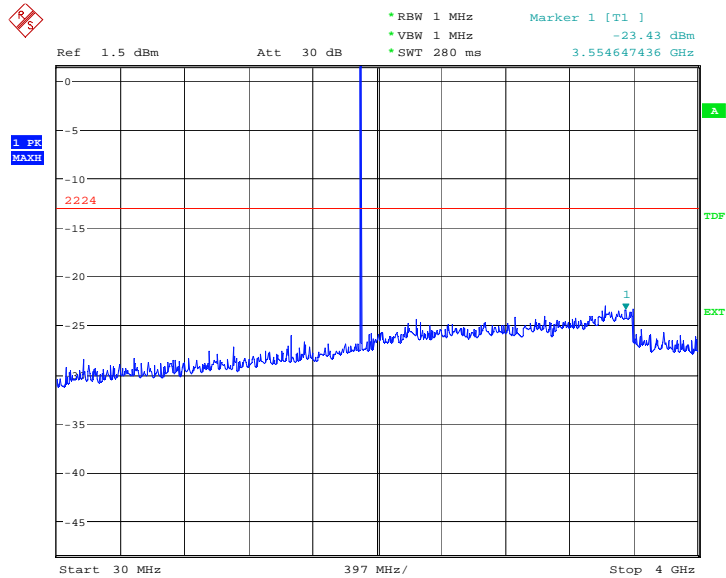


Date: 8.SEP.2008 02:31:52

B.10.3.14 Channel 810: 4GHz – 20GHz
Spurious emission limit –13dBm.

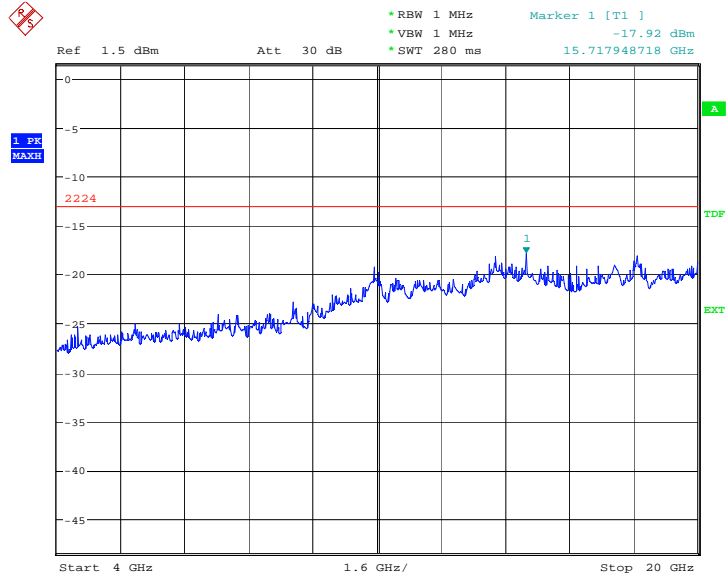


Date: 8.SEP.2008 02:32:12

B.10.3.15 Idle mode: 30MHz – 4GHz
Spurious emission limit –13dBm.

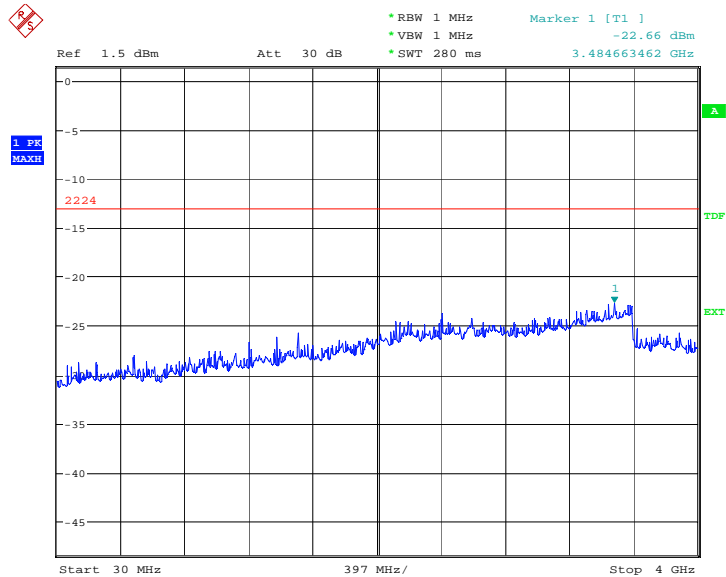

Date: 8.SEP.2008 02:34:17

B.10.3.16 Idle mode: 4GHz – 20GHz
Spurious emission limit -13dBm.

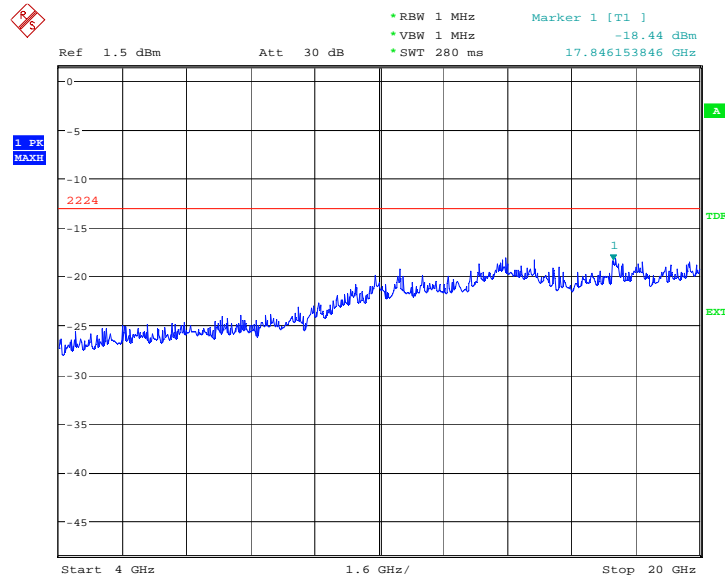


Date: 8.SEP.2008 02:34:58

WCDMA Band II

B.10.3.17 Channel 9262: 30MHz –4GHz

Spurious emission limit -13dBm.

NOTE: peak above the limit line is the carrier frequency.

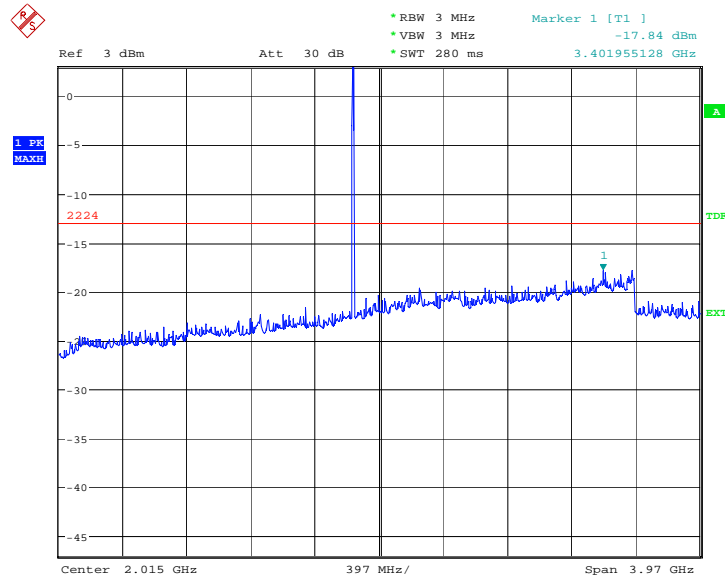


Date: 8.SEP.2008 07:21:10

WCDMA Band II

B.10.3.20 Channel 9400: 4GHz – 20GHz

Spurious emission limit –13dBm.

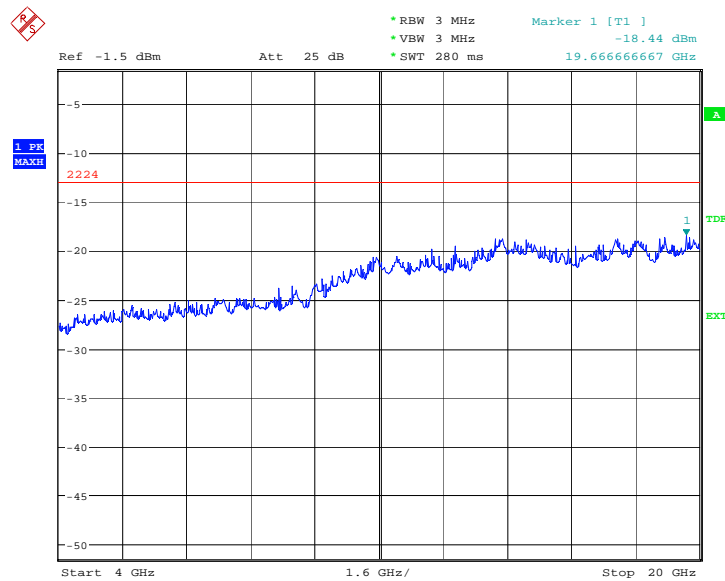


Date: 8.SEP.2008 07:23:15

WCDMA Band II

B.10.3.21 Channel 9538: 30MHz – 4GHz

Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

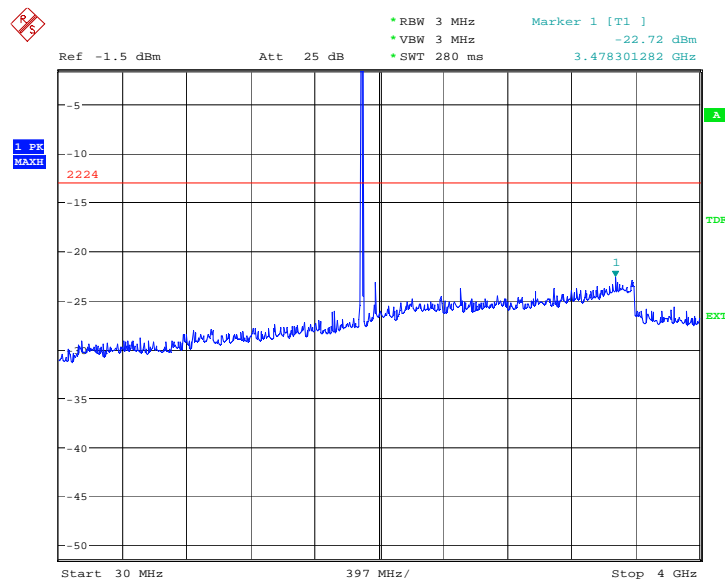


Date: 8.SEP.2008 07:23:53

WCDMA Band II

B.10.3.24 Idle mode: 4GHz – 20GHz

Spurious emission limit -13dBm.

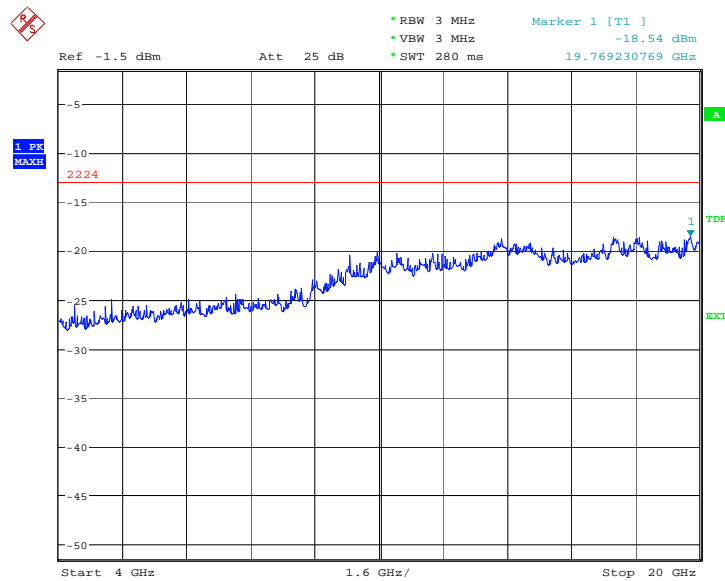


Date: 8.SEP.2008 07:30:01

WCDMA Band V

B.10.3.25 Channel 4132: 30MHz – 4GHz

Spurious emission limit -13dBm.

NOTE: peak above the limit line is the carrier frequency.

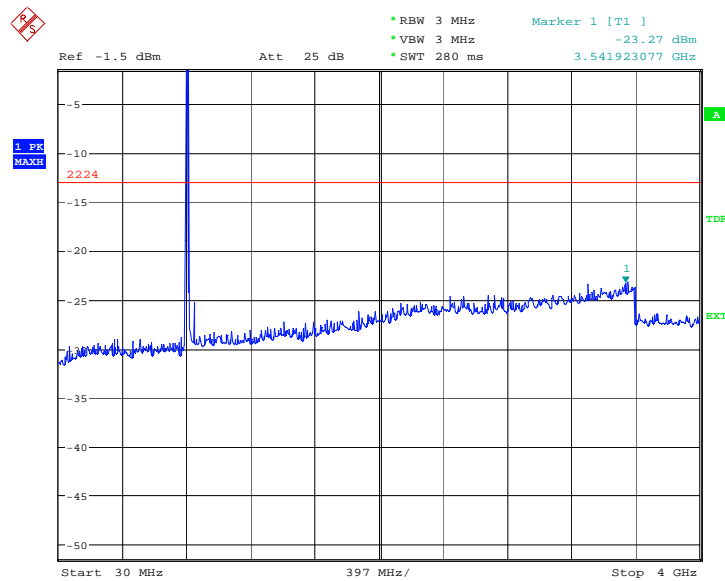


Date: 8.SEP.2008 07:24:49

WCDMA Band V

B.10.3.26 Channel 4132: 4GHz – 10GHz

Spurious emission limit -13dBm.

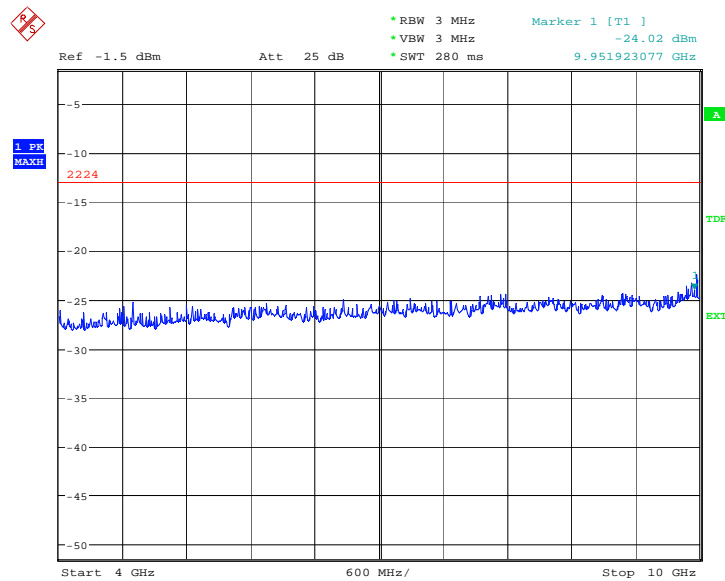


Date: 8.SEP.2008 07:26:21

WCDMA Band V

B.10.3.27 Channel 4183: 30MHz – 4GHz

Spurious emission limit -13dBm.

NOTE: peak above the limit line is the carrier frequency.

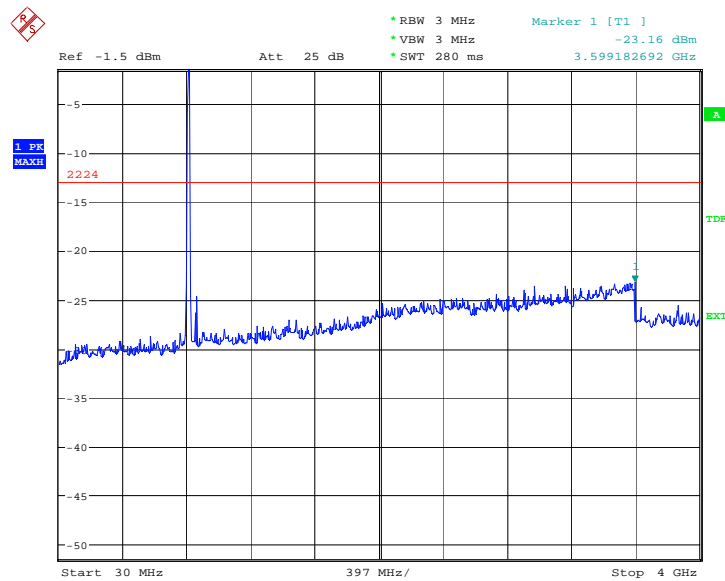


Date: 8.SEP.2008 07:25:36

WCDMA Band V

B.10.3.28 Channel 4183:4GHz – 10GHz

Spurious emission limit –13dBm.

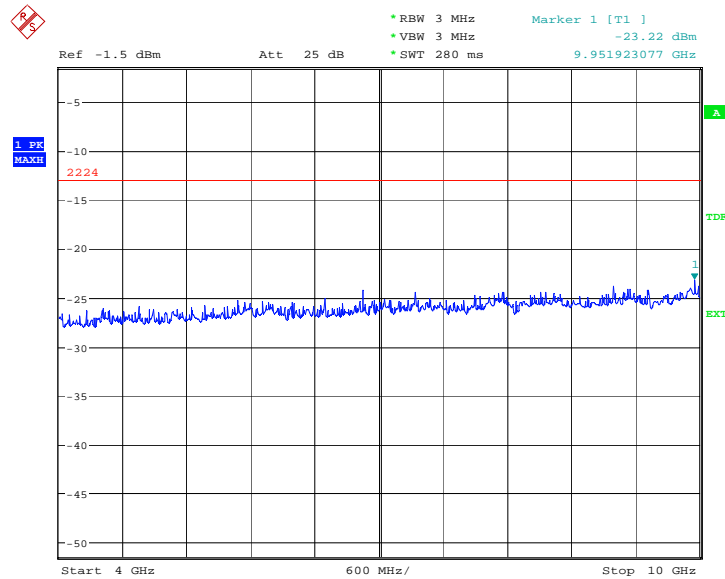


Date: 8.SEP.2008 07:26:03

WCDMA Band V

B.10.3.29 Channel 4233: 30MHz – 4GHz

Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

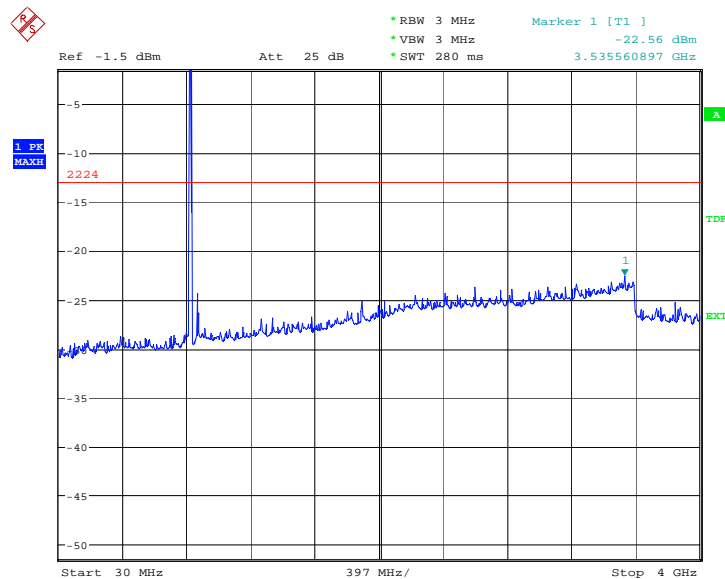


Date: 8.SEP.2008 07:27:19

WCDMA Band V

B.10.3.30 Channel 4233: 4GHz – 10GHz

Spurious emission limit -13dBm.

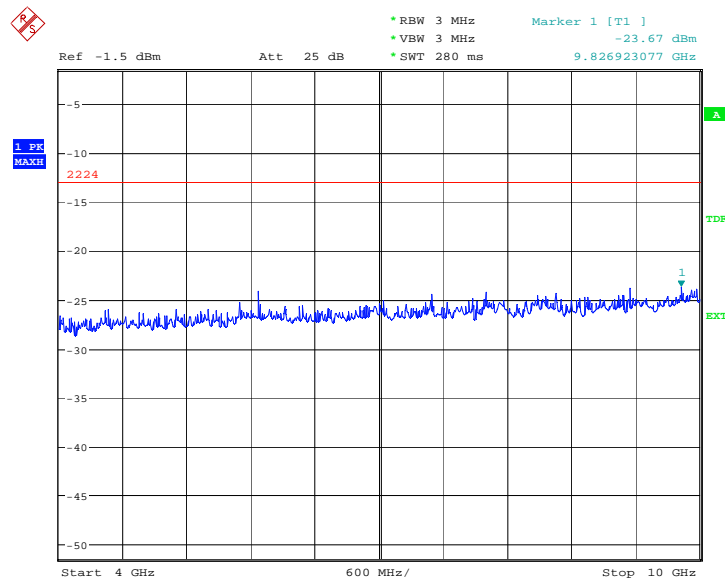


Date: 8.SEP.2008 07:27:34

WCDMA Band V

B.10.3.31 Idle mode: 30MHz – 4GHz

Spurious emission limit -13dBm.

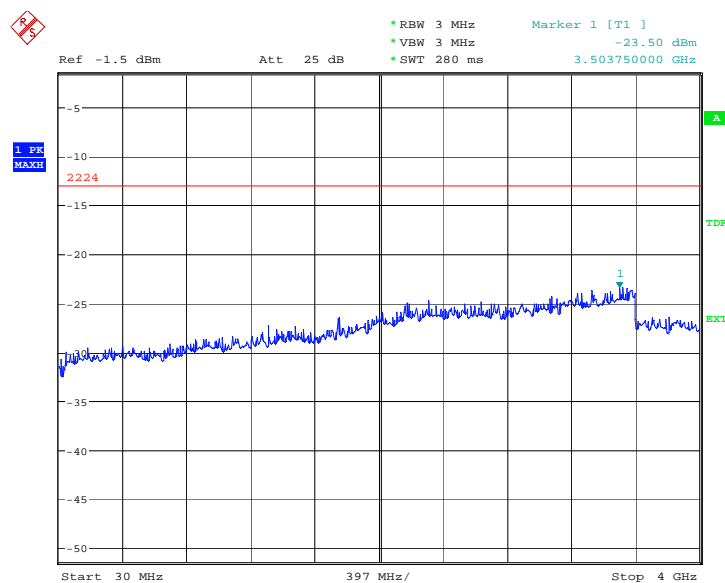


Date: 8.SEP.2008 07:29:01

WCDMA Band V

B.10.3.32 Idle mode: 4GHz – 10GHz

Spurious emission limit -13dBm.

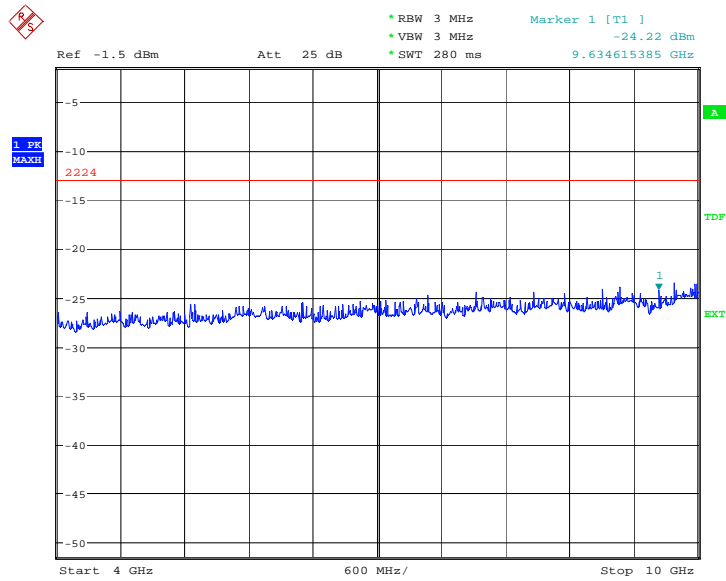

Date: 8.SEP.2008 07:29:17

ANNEX C: TEST LAYOUT



Pic C-1 Conducted Emission



Pic C-2 Radiated Spurious Emission



Pic C-3 Receiver Radiation Emission

*****END OF REPORT*****