

# FCC Radio Test Report

## FCC ID:Q78-ZXV10B820CA15

This report concerns: Original Grant

**Project No.** : 1912H040  
**Equipment** : Hybrid STB  
**Brand Name** : ZTE  
**Test Model** : ZXV10 B820C-A15  
**Series Model** : N/A  
**Applicant** : ZTE Corporation  
**Address** : ZTE Plaza, Hi-Tech Park, Nanshan District, Shenzhen, Guangdong,  
P.R.China  
**Manufacturer** : ZTE Corporation  
**Address** : ZTE Plaza, Hi-Tech Park, Nanshan District, Shenzhen, Guangdong,  
P.R.China  
**Date of Receipt** : Jan. 13, 2020  
**Date of Test** : Jan. 13, 2020~Feb. 16, 2020  
**Issued Date** : Feb. 28, 2020  
**Report Version** : R00  
**Test Sample** : Engineering Sample No.: SH201912301  
**Standard(s)** : FCC Part15, Subpart C (15.247)  
ANSI C63.10-2013  
KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

*Iscaa Min*

Prepared by : Iscaa Min

*Krain Wu*

Approved by : Krain Wu



Certificate # 5123.03

Add: No. 29, Jintang Road, Tangzhen Industry Park, Pudong New Area, Shanghai 201210,China

TEL: +86-021-61765666

Web: www.newbtl.com

**Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

**Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

<b>Table of Contents</b>	<b>Page</b>
<b>REPORT ISSUED HISTORY</b>	<b>6</b>
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>7</b>
1.1 TEST FACILITY	8
1.2 MEASUREMENT UNCERTAINTY	8
1.3 TEST ENVIRONMENT CONDITIONS	8
<b>2 . GENERAL INFORMATION</b>	<b>9</b>
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 DESCRIPTION OF TEST MODES	11
2.3 PARAMETERS OF TEST SOFTWARE	13
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
2.5 SUPPORT UNITS	13
<b>3 . AC POWER LINE CONDUCTED EMISSIONS TEST</b>	<b>14</b>
3.1 LIMIT	14
3.2 TEST PROCEDURE	14
3.3 DEVIATION FROM TEST STANDARD	14
3.4 TEST SETUP	15
3.5 EUT OPERATING CONDITIONS	15
3.6 TEST RESULTS	15
<b>4 . RADIATED EMISSION TEST</b>	<b>16</b>
4.1 LIMIT	16
4.2 TEST PROCEDURE	17
4.3 DEVIATION FROM TEST STANDARD	17
4.4 TEST SETUP	18
4.5 EUT OPERATING CONDITIONS	19
4.6 TEST RESULTS - 30 MHZ TO 1000 MHZ	19
4.7 TEST RESULTS - ABOVE 1000 MHZ	19
<b>5 . NUMBER OF HOPPING FREQUENCY</b>	<b>20</b>
5.1 LIMIT	20
5.2 TEST PROCEDURE	20
5.3 DEVIATION FROM STANDARD	20
5.4 TEST SETUP	20
5.5 EUT OPERATION CONDITIONS	20
5.6 TEST RESULTS	20

**Table of Contents****Page**

<b>6 . AVERAGE TIME OF OCCUPANCY</b>	<b>21</b>
6.1 LIMIT	21
6.2 TEST PROCEDURE	21
6.3 DEVIATION FROM STANDARD	21
6.4 TEST SETUP	21
6.5 EUT OPERATION CONDITIONS	21
6.6 TEST RESULTS	21
<b>7 . HOPPING CHANNEL SEPARATION MEASUREMENT</b>	<b>22</b>
7.1 LIMIT	22
7.2 TEST PROCEDURE	22
7.3 DEVIATION FROM STANDARD	22
7.4 TEST SETUP	22
7.5 EUT OPERATION CONDITIONS	22
7.6 TEST RESULTS	22
<b>8 . BANDWIDTH TEST</b>	<b>23</b>
8.1 LIMIT	23
8.2 TEST PROCEDURE	23
8.3 DEVIATION FROM STANDARD	23
8.4 TEST SETUP	23
8.5 EUT OPERATION CONDITIONS	23
8.6 TEST RESULTS	23
<b>9 . MAXIMUM OUTPUT POWER</b>	<b>24</b>
9.1 LIMIT	24
9.2 TEST PROCEDURE	24
9.3 DEVIATION FROM STANDARD	24
9.4 TEST SETUP	24
9.5 EUT OPERATION CONDITIONS	24
9.6 TEST RESULTS	24
<b>10 . CONDUCTED SPURIOUS EMISSION</b>	<b>25</b>
10.1 LIMIT	25
10.2 TEST PROCEDURE	25
10.3 DEVIATION FROM STANDARD	25
10.4 TEST SETUP	25
10.5 EUT OPERATION CONDITIONS	25

**Table of Contents****Page**

<b>10.6 TEST RESULTS</b>	<b>25</b>
<b>11 . MEASUREMENT INSTRUMENTS LIST</b>	<b>26</b>
<b>12 . EUT TEST PHOTO</b>	<b>28</b>
<b>APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS</b>	<b>31</b>
<b>APPENDIX B - RADIATED EMISSION - 30 MHZ TO 1000 MHZ</b>	<b>36</b>
<b>APPENDIX C - RADIATED EMISSION - ABOVE 1000 MHZ</b>	<b>41</b>
<b>APPENDIX D - NUMBER OF HOPPING FREQUENCY</b>	<b>66</b>
<b>APPENDIX E - AVERAGE TIME OF OCCUPANCY</b>	<b>68</b>
<b>APPENDIX F - HOPPING CHANNEL SEPARATION MEASUREMENT</b>	<b>73</b>
<b>APPENDIX G - BANDWIDTH</b>	<b>75</b>
<b>APPENDIX H - MAXIMUM OUTPUT POWER</b>	<b>77</b>
<b>APPENDIX I - CONDUCTED SPURIOUS EMISSION</b>	<b>80</b>

**REPORT ISSUED HISTORY**

Report Version	Description	Issued Date
R00	Original Issue.	Feb. 28, 2020

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart C (15.247)				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emission	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247 (a)(1)(iii)	Number of Hopping Frequency	APPENDIX E	PASS	-----
15.247 (a)(1)(iii)	Average Time Of Occupancy	APPENDIX F	PASS	-----
15.247(a)(1)	Hopping Channel Separation	APPENDIX G	PASS	-----
15.247(a)(1)	Bandwidth	APPENDIX H	PASS	-----
15.247(a)(1)	Maximum Output Power	APPENDIX I	PASS	-----
15.247(d)	Conducted Spurious Emission	APPENDIX J	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

**Note:**

- (1) "N/A" denotes test is not applicable in this test report
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

### 1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No. 29, Jintang Road, Tangzhen Industry Park, Pudong New Area, Shanghai 201210,China  
 BTL's Test Firm Registration Number for FCC: 476765  
 BTL's Designation Number for FCC: CN1241

### 1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))  
 The BTL measurement uncertainty as below table:

#### A. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
SH-CB01	CISPR	9 KHz~30 MHz	V	3.79
		9 KHz~30 MHz	H	3.57
		30 MHz~200 MHz	V	4.04
		30 MHz~200 MHz	H	3.76
		200 MHz~1,000 MHz	V	4.24
		200 MHz~1,000 MHz	H	3.84
		1 GHz~18 GHz	V	4.46
		1 GHz~18 GHz	H	4.40
		18 GHz~40 GHz	V	3.95
		18 GHz~40 GHz	H	3.95

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	22°C	56%	AC 120V/60Hz	Forest Li
Radiated Emissions-30 MHz to 1GHz	22°C	42%	AC 120V/60Hz	Forest Li
Radiated Emissions-Above 1000 MHz	22°C	42%	AC 120V/60Hz	Forest Li
Number of Hopping Frequency	22°C	56%	AC 120V/60Hz	Forest Li
Average Time Of Occupancy	22°C	56%	AC 120V/60Hz	Forest Li
Hopping Channel Separation	22°C	56%	AC 120V/60Hz	Forest Li
Bandwidth	22°C	56%	AC 120V/60Hz	Forest Li
Maximum Output Power & e.i.r.p.	22°C	56%	AC 120V/60Hz	Forest Li
Conducted Spurious Emission	22°C	56%	AC 120V/60Hz	Forest Li



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	Hybrid STB
Brand Name	ZTE
Test Model	ZXV10 B820C-A15
Series Model	N/A
Model Difference(s)	N/A
Software Version	N/A
Hardware Version	N/A
Power Source	DC voltage supplied from AC/DC adapter. #1:Meic/MN012E-L120100 #2:Ruide/RD1201000-C55-35MGD
Power Rating	I/P: I/P:100-240~50/60Hz 0.6A max. O/P:12V $\overline{\text{---}}$ 1A
Operation Frequency	2402 MHz ~ 2480 MHz
Modulation Technology	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Bit Rate of Transmitter	1 Mbps, 2 Mbps, 3Mbps
Max. Output Power	1.83 dBm (0.0015 W) For 1Mbps 5.82 dBm (0.0038 W) For 2Mbps 6.38 dBm (0.0043 W) For 3Mbps

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

## 2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

## 3 Table for Filed Antenna:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Internal	N/A	2dBi

## 2.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX 2402MHz_CH00_1Mbps
Mode 2	TX 2441MHz_CH39_1Mbps
Mode 3	TX 2480MHz_CH78_1Mbps
Mode 4	TX 2402MHz_CH00_2Mbps
Mode 5	TX 2441MHz_CH39_2Mbps
Mode 6	TX 2480MHz_CH78_2Mbps
Mode 7	TX 2402MHz_CH00_3Mbps
Mode 8	TX 2441MHz_CH39_3Mbps
Mode9	TX 2480MHz_CH78_3Mbps

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

<b>AC power line conducted emissions test</b>	
Final Test Mode	Description
Mode 5	TX 2441MHz_CH39_2Mbps
<b>Radiated emissions test - Below 1GHz</b>	
Final Test Mode	Description
Mode 5	TX 2441MHz_CH39_2Mbps
<b>Radiated emissions test - Above 1GHz</b>	
Final Test Mode	Description
Mode 1	TX 2402MHz_CH00_1Mbps
Mode 2	TX 2440MHz_CH39_1Mbps
Mode 3	TX 2480MHz_CH78_1Mbps
Mode 7	TX 2402MHz_CH00_3Mbps
Mode 8	TX 2440MHz_CH39_3Mbps
Mode9	TX 2480MHz_CH78_3Mbps

Conducted test	
Final Test Mode	Description
Mode 1	TX 2402MHz_CH00_1Mbps
Mode 2	TX 2441MHz_CH39_1Mbps
Mode 3	TX 2480MHz_CH78_1Mbps
Mode 4	TX 2402MHz_CH00_2Mbps
Mode 5	TX 2441MHz_CH39_2Mbps
Mode 6	TX 2480MHz_CH78_2Mbps
Mode 7	TX 2402MHz_CH00_3Mbps
Mode 8	TX 2441MHz_CH39_3Mbps
Mode9	TX 2480MHz_CH78_3Mbps

**Note:**


- (1) The measurements for Hopping Channel Separation and Bandwidth were tested during 1Mbps, 2Mbps and 3Mbps, the worst case are 1Mbps and 3Mbps, only worst case was documented.
- (2) For radiated emission above 1 GHz test, 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

### 2.3 PARAMETERS OF TEST SOFTWARE

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Test Software	cmd		
Frequency (MHz)	2402	2441	2480
Parameters(1Mbps)	default	default	default
Parameters(2Mbps)	default	default	default
Parameters(3Mbps)	default	default	default

### 2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

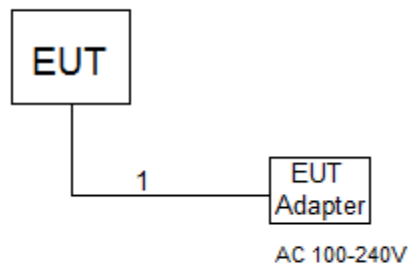

### 2.5 SUPPORT UNITS

Item	Equipment	Brand	Model/Type No.	Series No.
-	-	-	-	-

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	N/A	N/A	1m

### 3. AC POWER LINE CONDUCTED EMISSIONS TEST

#### 3.1 LIMIT

Frequency of Emission (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


#### 3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 3.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.4 TEST SETUP

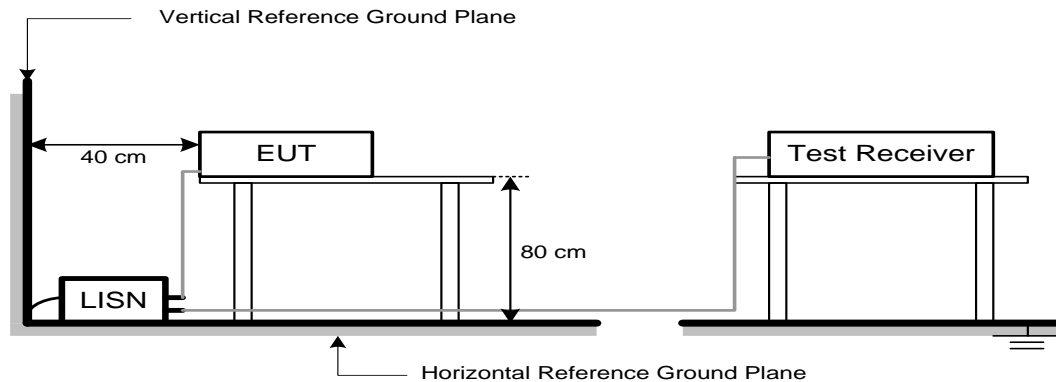

### 3.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical function (as a customer would normally use it), EUT was programmed to be in continuously transmitting data or hopping on mode.

### 3.6 TEST RESULTS

Please refer to the APPENDIX A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』 . If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform in this case, a "\*" marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150 kHz to 30 MHz.

#### 4. RADIATED EMISSION TEST

##### 4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
 Margin Level = Measurement Value - Limit Value



Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	RBW 1 MHz VBW 3 MHz peak detector for Pk value RMS detector for AV value



Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector


#### 4.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1 GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.  
(below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.3 DEVIATION FROM TEST STANDARD

No deviation

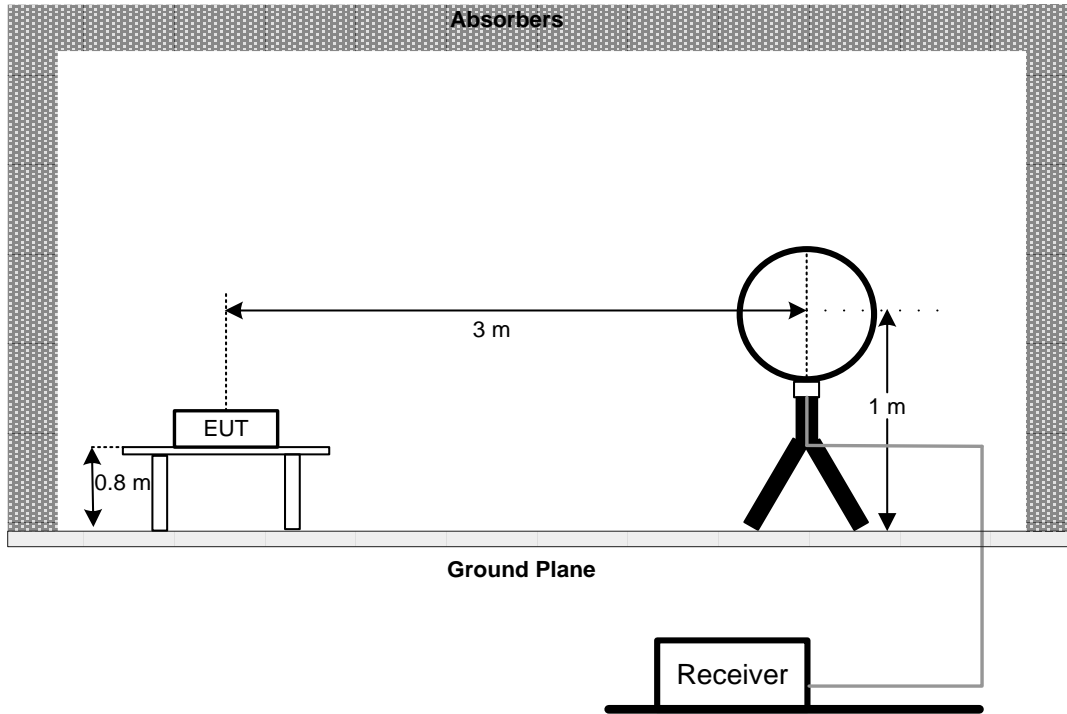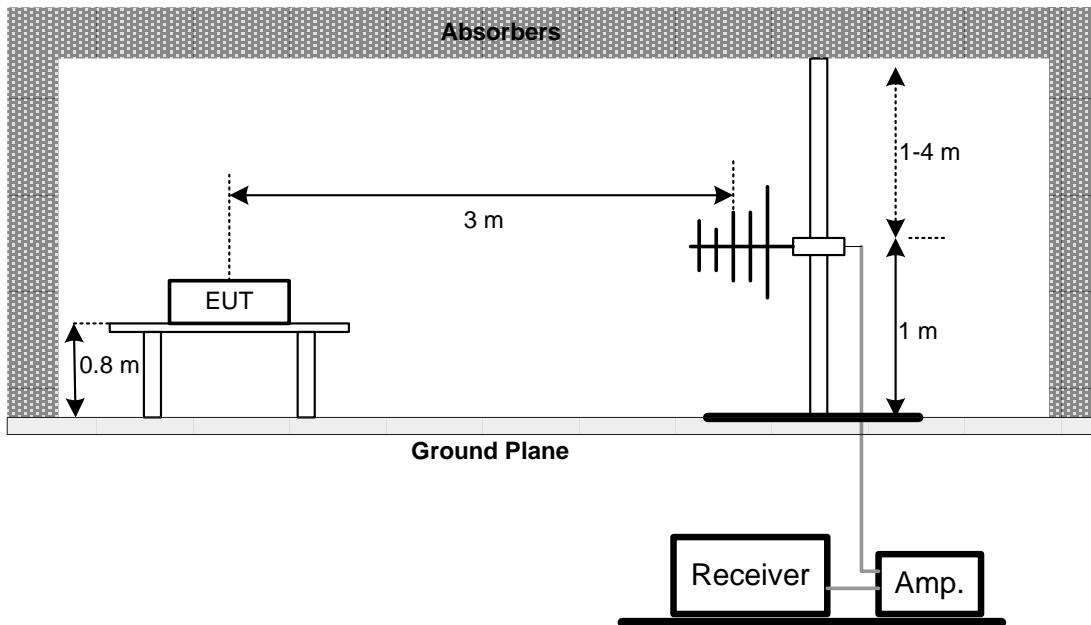**4.4 TEST SETUP****9 kHz-30 MHz****30 MHz to 1 GHz**

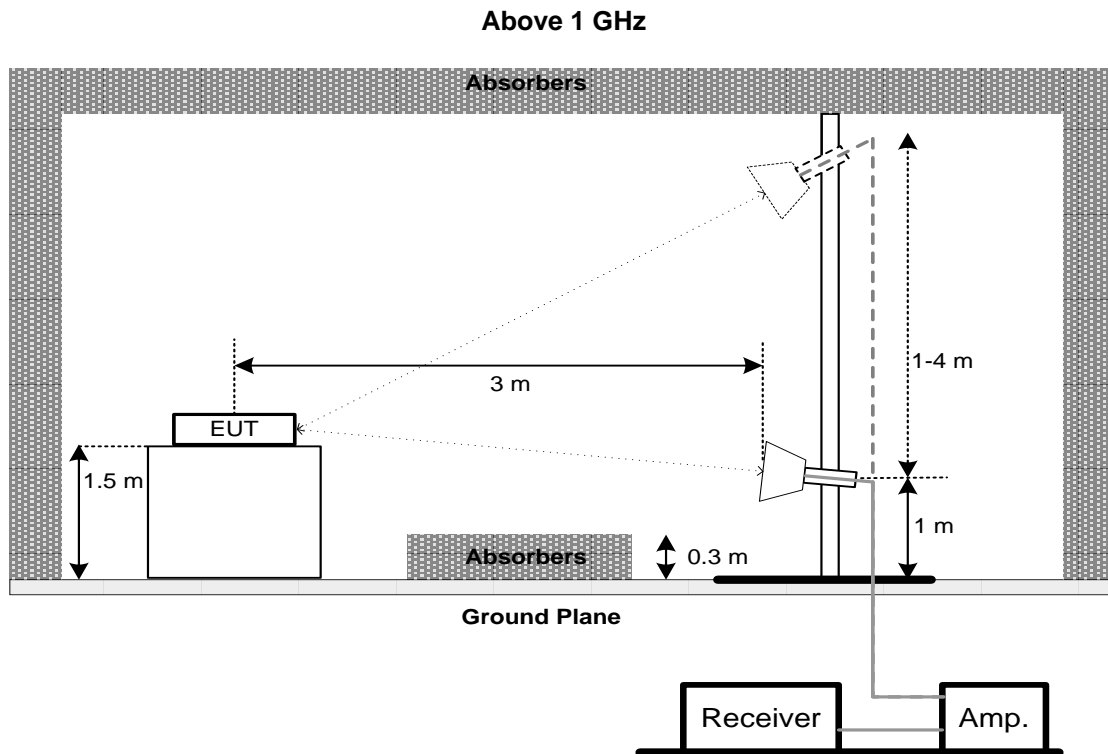

**4.5 EUT OPERATING CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

**4.6 TEST RESULTS - 30 MHz TO 1000 MHz**

Please refer to the APPENDIX B.

**4.7 TEST RESULTS - ABOVE 1000 MHz**

Please refer to the APPENDIX C.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

**5. NUMBER OF HOPPING FREQUENCY**

**5.1 LIMIT**

FCC Part15, Subpart C (15.247)	
Section	Test Item
15.247(a)(1)(iii)	Number of Hopping Frequency

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RBW	100 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

**5.2 TEST PROCEDURE**

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW=100 kHz, VBW=100 kHz, Sweep time = Auto.

**5.3 DEVIATION FROM STANDARD**

No deviation.

**5.4 TEST SETUP**



**5.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

**5.6 TEST RESULTS**

Please refer to the APPENDIX D

## 6. AVERAGE TIME OF OCCUPANCY

### 6.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(a)(1)(iii)	Average Time of Occupancy	0.4sec

### 6.2 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b. Set RBW of spectrum analyzer to 1 MHz and VBW to 1 MHz
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses
- d. Sweep Time is more than once pulse time
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span
- f. Measure the maximum time duration of one single pulse
- g. Set the EUT for DH1, DH3 and DH5 packet transmitting
- h. Measure the maximum time duration of one single pulse
  - i. DH1 Packet permit maximum  $1600 / 79 / 2 = 10.12$  hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $10.12 \times 31.6 = 320$  within 31.6 seconds
  - j. DH3 Packet permit maximum  $1600 / 79 / 4 = 5.06$  hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $5.06 \times 31.6 = 160$  within 31.6 seconds
  - k. DH5 Packet permit maximum  $1600 / 79 / 6 = 3.38$  hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $3.38 \times 31.6 = 106.7$  within 31.6 seconds

### 6.3 DEVIATION FROM STANDARD

No deviation.

### 6.4 TEST SETUP



### 6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 6.6 TEST RESULTS

Please refer to the APPENDIX E

## 7. HOPPING CHANNEL SEPARATION MEASUREMENT

### 7.1 LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 7.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Span = wide enough to capture the peaks of two adjacent channels  
 Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span  
 Video (or Average) Bandwidth (VBW)  $\geq$  RBW  
 Sweep = Auto  
 Detector function = Peak  
 Trace = Max Hold

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP



### 7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 7.6 TEST RESULTS

Please refer to the APPENDIX F

## 8. BANDWIDTH TEST

### 8.1 LIMIT

FCC Part15, Subpart C (15.247)	
Section	Test Item
15.247(a)(1)	Bandwidth

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth
RBW	30 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW= 30 kHz, VBW=100 kHz, Sweep Time = Auto.

### 8.3 DEVIATION FROM STANDARD

No deviation.

### 8.4 TEST SETUP



### 8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 8.6 TEST RESULTS

Please refer to the APPENDIX G

## 9. MAXIMUM OUTPUT POWER

### 9.1 LIMIT

FCC Part15 , Subpart C (15.247)		
Section	Test Item	Limit
15.247(a)(1)	Maximum Output Power	0.125 Watt or 21 dBm

Note: Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 9.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW= 1 MHz/3 MHz, VBW= 1 MHz/3 MHz, Sweep time = Auto.

### 9.3 DEVIATION FROM STANDARD

No deviation.

### 9.4 TEST SETUP



### 9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 9.6 TEST RESULTS

Please refer to the APPENDIX H



## 10. CONDUCTED SPURIOUS EMISSION

### 10.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.


### 10.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 100 kHz, VBW=100 kHz, Sweep time = Auto.

### 10.3 DEVIATION FROM STANDARD

No deviation.

### 10.4 TEST SETUP

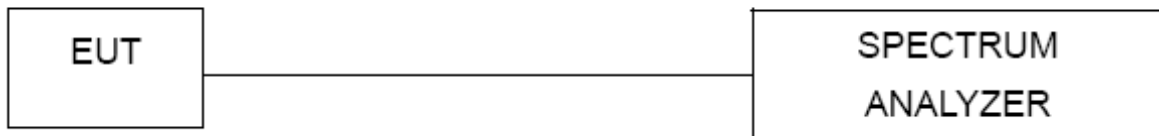

### 10.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 10.6 TEST RESULTS

Please refer to the APPENDIX I

**11. MEASUREMENT INSTRUMENTS LIST**

<b>AC Power Line Conducted Emissions</b>					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Line Impedance Stabilisation Network	Schwarzbeck	NNLK 8121	8121-822	Mar. 29, 2020
2	TWO-LINE V-NETWORK	R&S	ENV216	101340	Sep. 01, 2020
3	Test Cable	emci	EMCRG400-BM-N M-10000	170628	Apr. 17, 2020
4	EMI Test Receiver	R&S	ESCI	100082	Mar. 29, 2020
5	50Ω Terminator	SHX	TF2-1G-A	17051602	Mar. 29, 2020
6	50Ω coaxial switch	Anritsu	MP59B	6201750902	Mar. 29, 2020
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

<b>Radiated Emissions - 9 kHz to 30 MHz</b>					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Loop Antenna	EMCI	EMCI LPA600	275	Mar. 29, 2020
2	EMI Test Receiver	R&S	ESCI	100082	Mar. 29, 2020
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

<b>Radiated Emissions - 30 MHz to 1 GHz</b>					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	719	Mar. 29, 2020
2	Pre-Amplifier	emci	EMC9135	980400	Mar. 29, 2020
3	MXE EMI Receiver	Keysight	N9038A	MY57150106	Mar. 29, 2020
4	Test Cable	emci	EMC104-SM-SM-7000	170330	Apr. 17, 2020
5	Test Cable	emci	EMC104-SM-SM-1000	170331	Apr. 17, 2020
6	Test Cable	emci	EMC104-SM-NM-3500	170621	Apr. 17, 2020
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double-Ridged Waveguide Horn Antenna	ETS-Lindgren	9120D	00206960	Mar. 29, 2020
2	Pre-Amplifier	emci	EMC012645SE	980421	Mar. 29, 2020
3	EXA Spectrum Analyzer	Keysight	N9010A	MY56480545	Mar. 29, 2020
4	Test Cable	emci	EMC104-SM-SM-7000	170330	Apr. 17, 2020
5	Test Cable	emci	EMC104-SM-SM-1000	170331	Apr. 17, 2020
6	Test Cable	emci	EMC104-SM-NM-3500	170621	Apr. 17, 2020
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	MXE EMI Receiver	Keysight	N9038A	MY57150106	Mar. 29, 2020
9	Double-Ridged Waveguide Horn Antenna	ETS-Lindgren	3116C	00203919	Mar. 29, 2020
10	Pre-Amplifier	emci	EMC184045SE	980409	Mar. 29, 2020
11	EXA Spectrum Analyzer	Keysight	N9010A	MY56480579	Mar. 29, 2020
12	Test Cable	emci	EMC102-KM-KM-800	170654	Apr. 17, 2020
13	Test Cable	emci	Super Reliable-40G-SS11-7000	W0030860001	Apr. 17, 2020
14	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Number of Hopping Frequency					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	Mar. 29, 2020

Average Time of Occupancy					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	Mar. 29, 2020

Hopping Channel Separation Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	Mar. 29, 2020


Bandwidth					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	Mar. 29, 2020

Maximum Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	Mar. 29, 2020

Antenna Conducted Spurious Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	Mar. 29, 2020

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

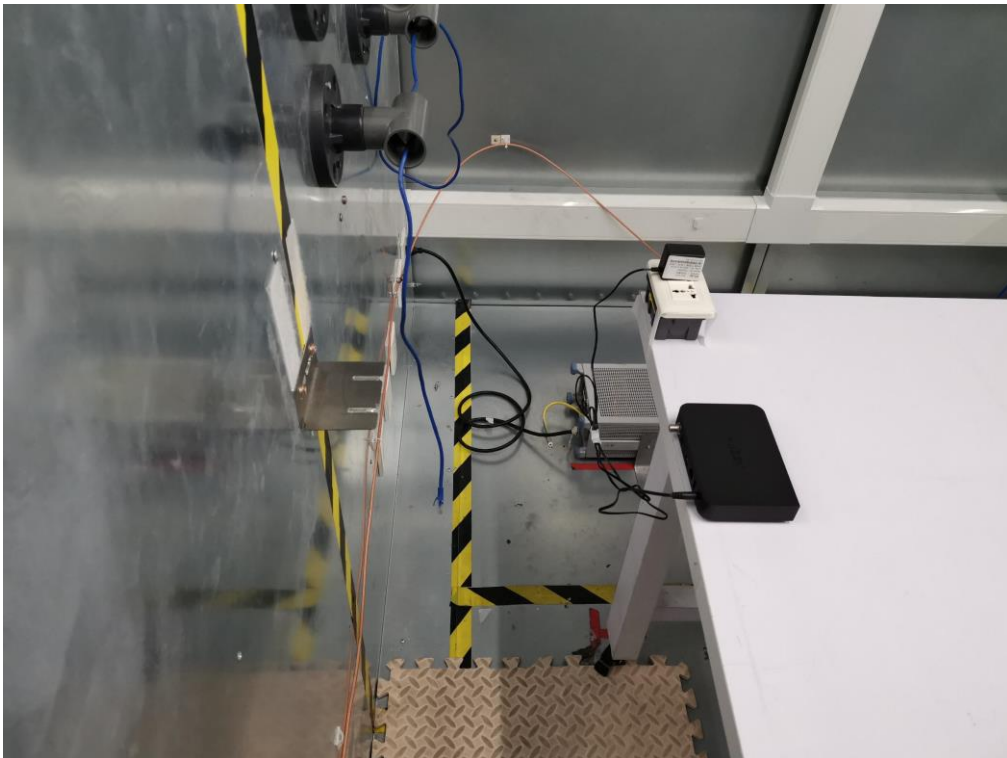**12. EUT TEST PHOTO****Conducted Emissions Test Photos**


**Radiated Emissions Test Photos****30 MHz to 1000 MHz**

**Radiated Emissions Test Photos****Above 1 GHz**

## **APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS**

Test Mode: TX 2441MHz\_CH39\_2Mbps Adapter: MN012E-L120100

### Line

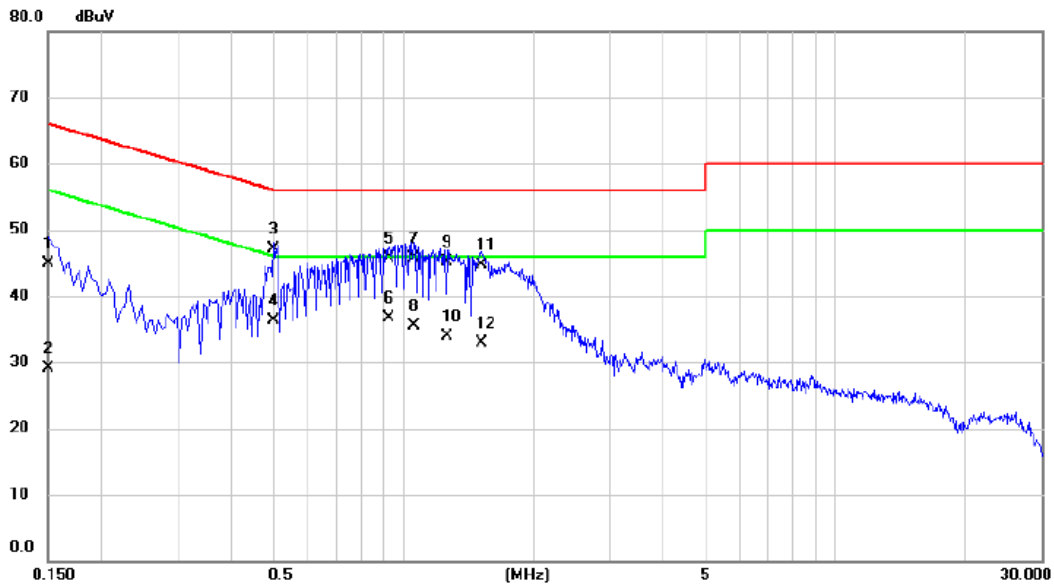

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	35.20	9.76	44.96	66.00	-21.04	QP	
2		0.1500	19.30	9.76	29.06	56.00	-26.94	AVG	
3	*	0.5010	37.10	10.00	47.10	56.00	-8.90	QP	
4		0.5010	26.30	10.00	36.30	46.00	-9.70	AVG	
5		0.9240	35.90	9.83	45.73	56.00	-10.27	QP	
6		0.9240	26.80	9.83	36.63	46.00	-9.37	AVG	
7		1.0545	36.10	9.64	45.74	56.00	-10.26	QP	
8		1.0545	25.90	9.64	35.54	46.00	-10.46	AVG	
9		1.2615	35.90	9.26	45.16	56.00	-10.84	QP	
10		1.2615	24.70	9.26	33.96	46.00	-12.04	AVG	
11		1.5180	34.80	9.95	44.75	56.00	-11.25	QP	
12		1.5180	22.90	9.95	32.85	46.00	-13.15	AVG	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode: TX 2441MHz\_CH39\_2Mbps Adapter: MN012E-L120100

### Neutral

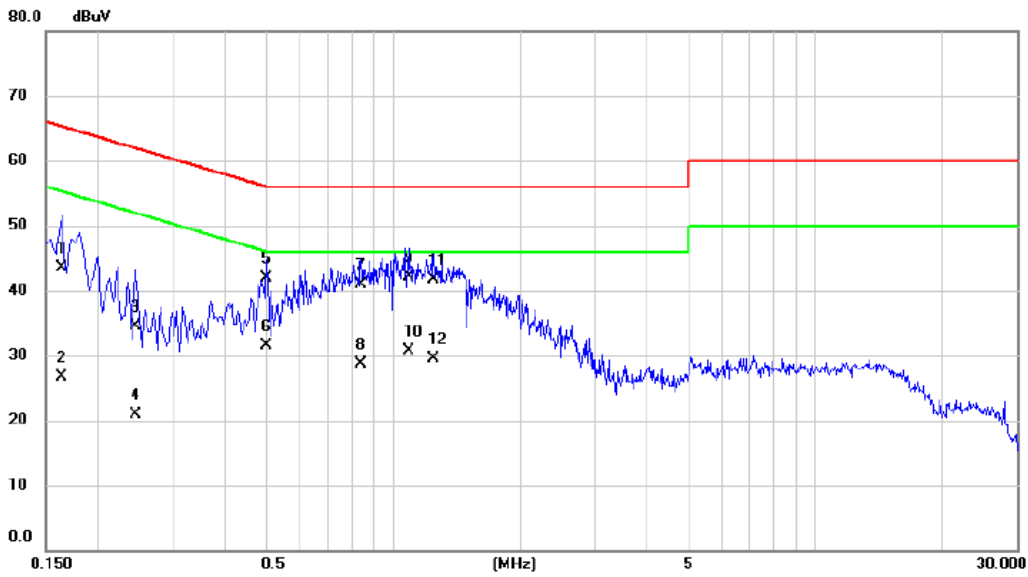


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1635	34.00	9.59	43.59	65.28	-21.69	QP	
2	0.1635	17.20	9.59	26.79	55.28	-28.49	AVG	
3	0.2445	24.80	9.71	34.51	61.94	-27.43	QP	
4	0.2445	11.20	9.71	20.91	51.94	-31.03	AVG	
5	0.5010	32.10	9.83	41.93	56.00	-14.07	QP	
6	0.5010	21.60	9.83	31.43	46.00	-14.57	AVG	
7	0.8385	31.10	9.78	40.88	56.00	-15.12	QP	
8	0.8385	19.00	9.78	28.78	46.00	-17.22	AVG	
9 *	1.0860	32.30	9.73	42.03	56.00	-13.97	QP	
10	1.0860	21.00	9.73	30.73	46.00	-15.27	AVG	
11	1.2435	31.90	9.75	41.65	56.00	-14.35	QP	
12	1.2435	19.80	9.75	29.55	46.00	-16.45	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2441MHz\_CH39\_2Mbps Adapter: RD1201000-C55-35MGD

### Line

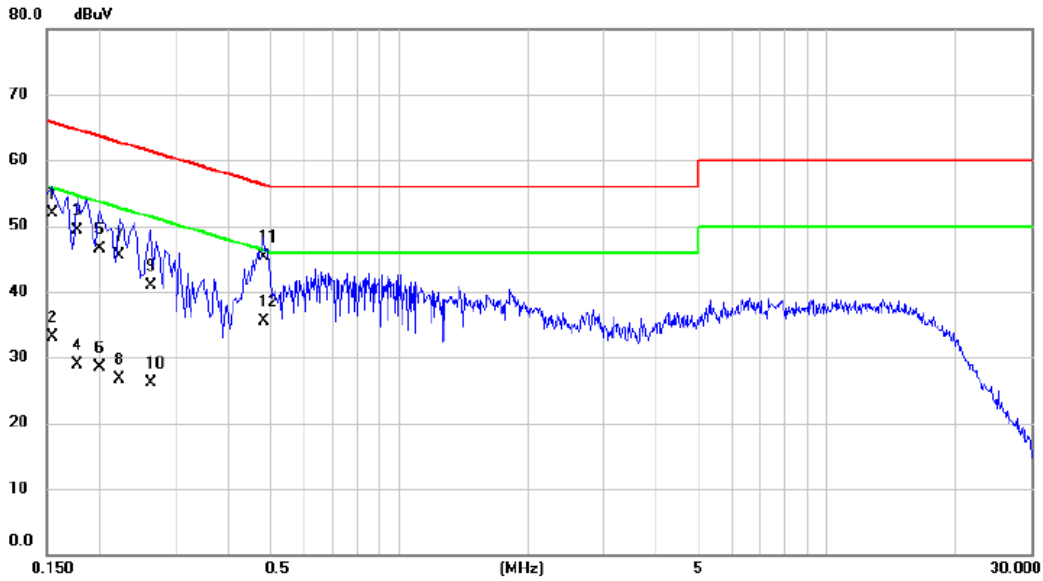


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1545	42.10	9.77	51.87	65.75	-13.88	QP	
2		0.1545	23.40	9.77	33.17	55.75	-22.58	AVG	
3		0.1770	39.60	9.80	49.40	64.63	-15.23	QP	
4		0.1770	19.10	9.80	28.90	54.63	-25.73	AVG	
5		0.1995	36.70	9.82	46.52	63.63	-17.11	QP	
6		0.1995	18.70	9.82	28.52	53.63	-25.11	AVG	
7		0.2220	35.70	9.84	45.54	62.74	-17.20	QP	
8		0.2220	16.90	9.84	26.74	52.74	-26.00	AVG	
9		0.2625	31.10	9.85	40.95	61.35	-20.40	QP	
10		0.2625	16.30	9.85	26.15	51.35	-25.20	AVG	
11		0.4830	35.40	9.98	45.38	56.29	-10.91	QP	
12	*	0.4830	25.50	9.98	35.48	46.29	-10.81	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2441MHz\_CH39\_2Mbps Adapter: RD1201000-C55-35MGD

### Neutral

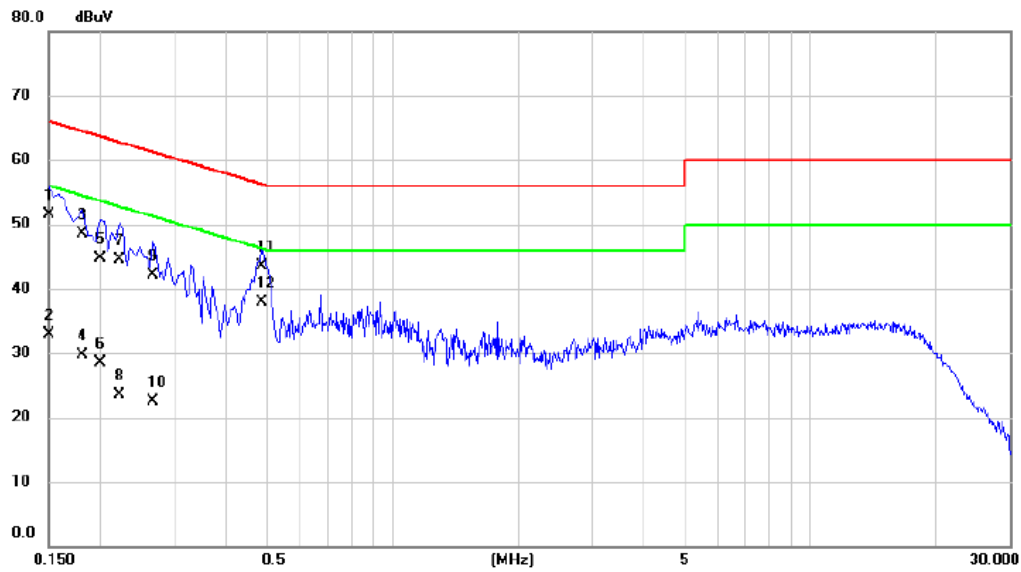


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	41.80	9.63	51.43	66.00	-14.57	QP	
2		0.1500	23.20	9.63	32.83	56.00	-23.17	AVG	
3		0.1815	38.80	9.61	48.41	64.42	-16.01	QP	
4		0.1815	20.10	9.61	29.71	54.42	-24.71	AVG	
5		0.1995	35.00	9.66	44.66	63.63	-18.97	QP	
6		0.1995	18.80	9.66	28.46	53.63	-25.17	AVG	
7		0.2220	34.90	9.69	44.59	62.74	-18.15	QP	
8		0.2220	13.80	9.69	23.49	52.74	-29.25	AVG	
9		0.2670	32.30	9.74	42.04	61.21	-19.17	QP	
10		0.2670	12.80	9.74	22.54	51.21	-28.67	AVG	
11		0.4875	33.70	9.82	43.52	56.21	-12.69	QP	
12	*	0.4875	28.10	9.82	37.92	46.21	-8.29	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

**APPENDIX B - RADIATED EMISSION - 30 MHZ TO 1000 MHZ**

Test Mode:	TX 2441MHz_CH39_2Mbps Adapter: MN012E-L120100
------------	---

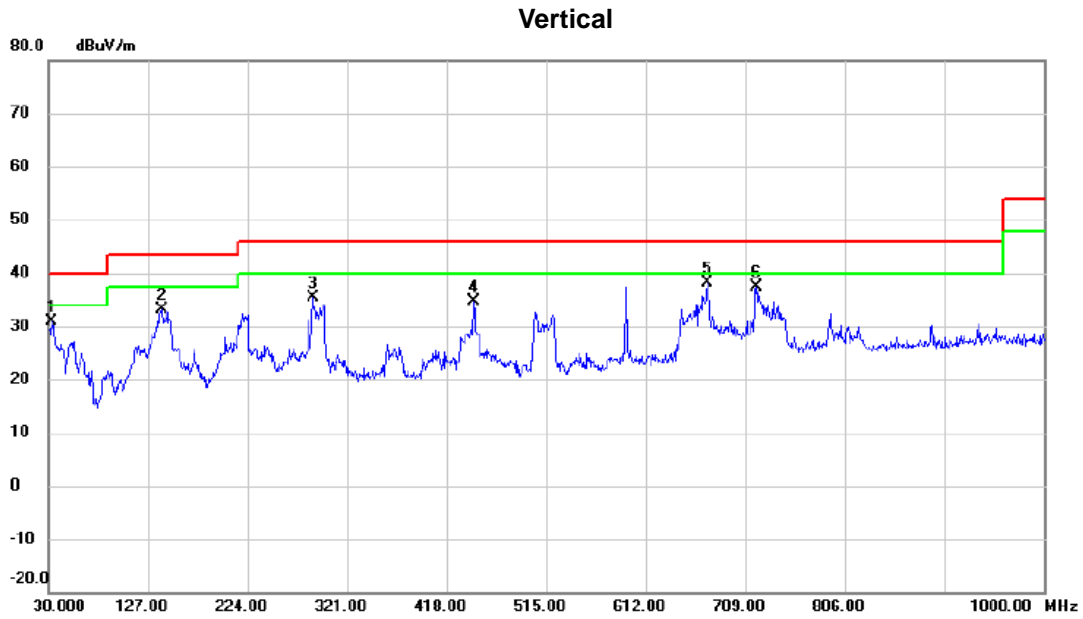


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		33.3950	48.26	-17.28	30.98	40.00	-9.02	peak	
2		140.0950	48.84	-15.68	33.16	43.50	-10.34	peak	
3		287.5350	50.40	-14.91	35.49	46.00	-10.51	peak	
4		444.6750	47.52	-12.92	34.60	46.00	-11.40	peak	
5	*	672.1400	46.63	-8.53	38.10	46.00	-7.90	peak	
6		719.6700	45.20	-7.82	37.38	46.00	-8.62	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2441MHz\_CH39\_2Mbps Adapter: MN012E-L120100

### Horizontal

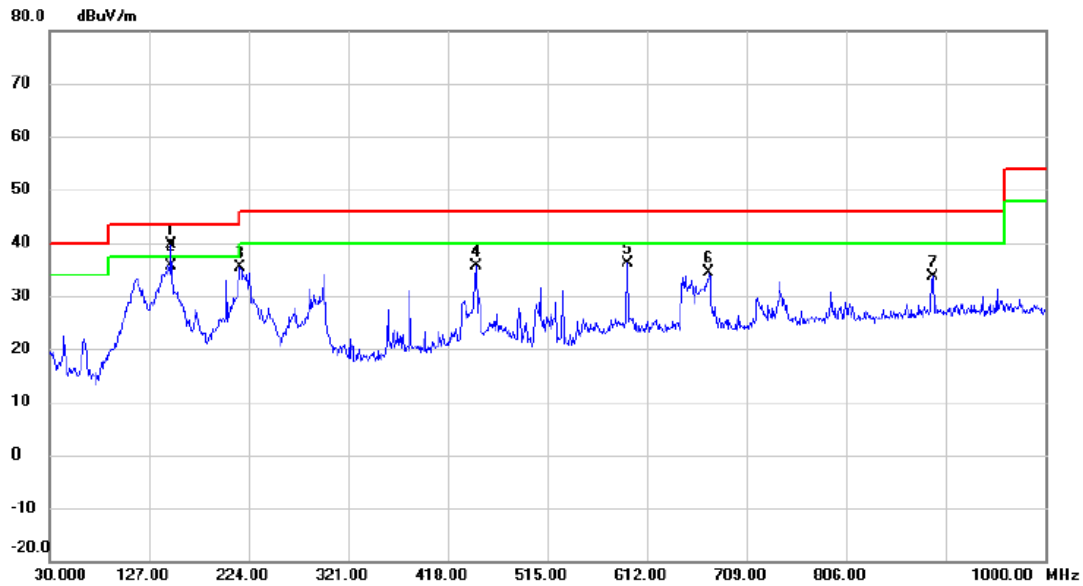


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	148.3400	54.49	-14.94	39.55	43.50	-3.95	peak	
2		148.3400	50.56	-14.94	35.62	43.50	-7.88	QP	
3		215.7550	53.57	-18.12	35.45	43.50	-8.05	peak	
4		445.1600	48.57	-12.92	35.65	46.00	-10.35	peak	
5		593.0850	45.14	-9.02	36.12	46.00	-9.88	peak	
6		672.1400	42.84	-8.53	34.31	46.00	-11.69	peak	
7		890.3900	39.13	-5.54	33.59	46.00	-12.41	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2441MHz\_CH39\_2Mbps Adapter: RD12010000-C55-35

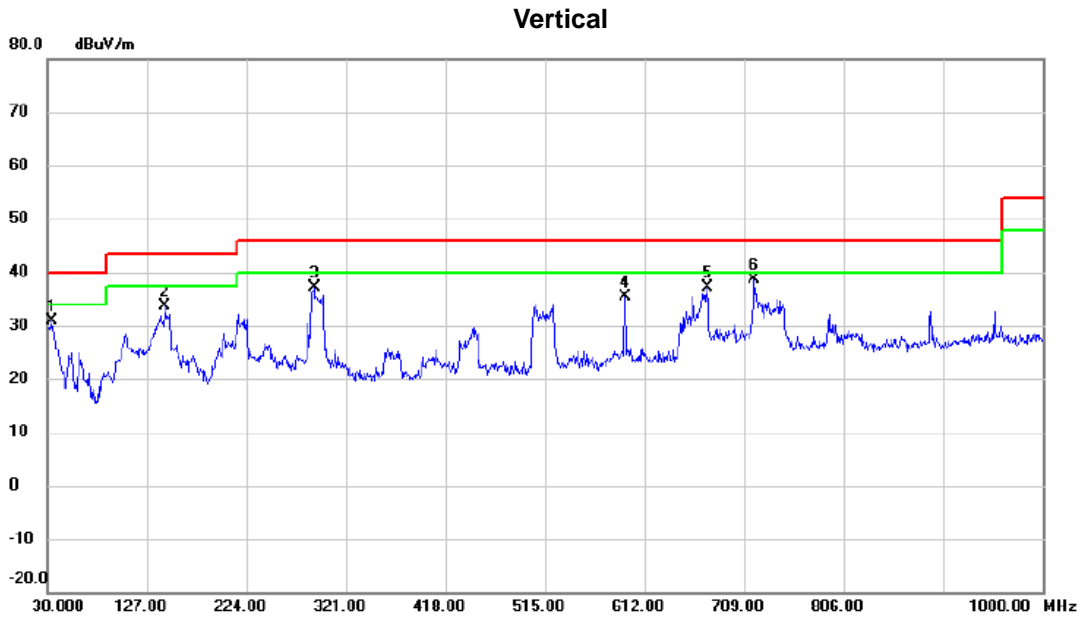


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		34.3650	48.06	-17.27	30.79	40.00	-9.21	peak	
2		144.4600	48.81	-15.29	33.52	43.50	-9.98	peak	
3		290.4450	52.08	-14.83	37.25	46.00	-8.75	peak	
4		593.5700	44.41	-8.98	35.43	46.00	-10.57	peak	
5		673.5950	45.60	-8.55	37.05	46.00	-8.95	peak	
6	*	719.1850	46.35	-7.84	38.51	46.00	-7.49	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2441MHz\_CH39\_2Mbps Adapter: RD12010000-C55-35

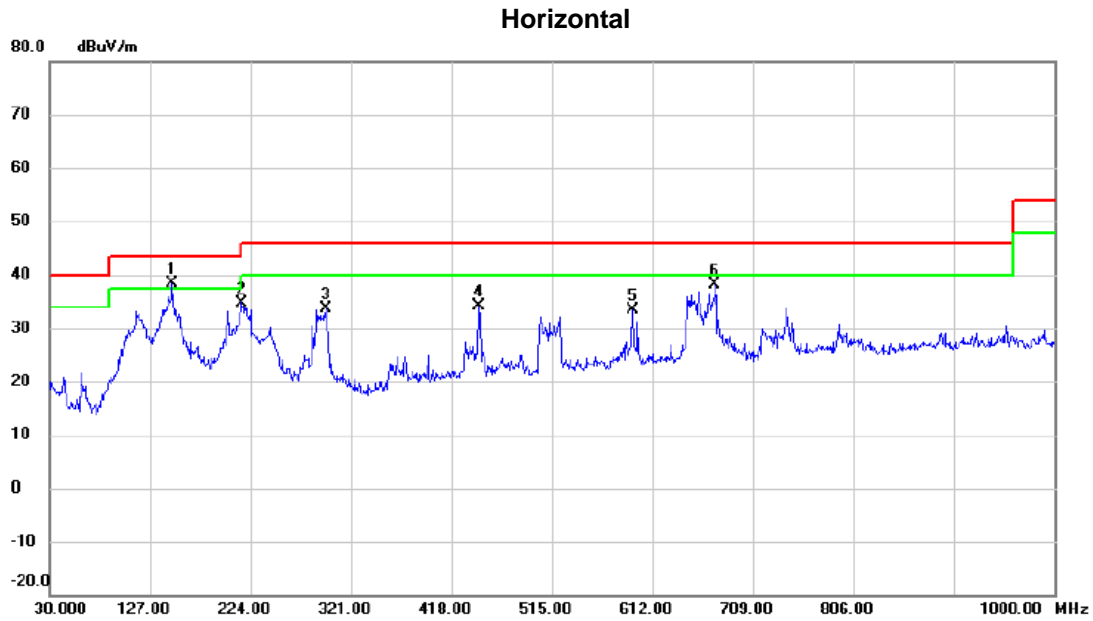

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	148.3400	53.32	-14.94	38.38	43.50	-5.12	peak	
2		215.7550	52.87	-18.12	34.75	43.50	-8.75	peak	
3		296.7500	48.05	-14.49	33.56	46.00	-12.44	peak	
4		444.6750	46.95	-12.92	34.03	46.00	-11.97	peak	
5		593.0850	42.32	-9.02	33.30	46.00	-12.70	peak	
6		672.1400	46.67	-8.53	38.14	46.00	-7.86	peak	

**REMARKS:**


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



## **APPENDIX C - RADIATED EMISSION - ABOVE 1000 MHZ**

Test Mode: TX 2402 MHz \_CH00\_1Mbps

Vertical

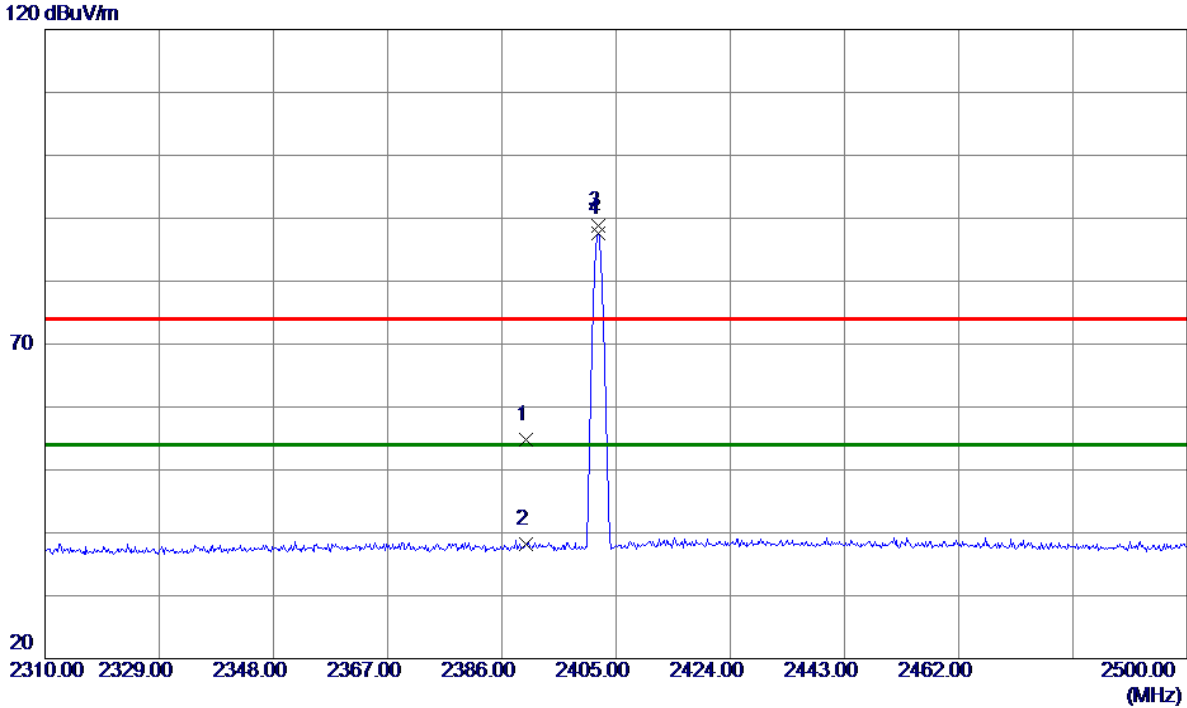


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	22.37	32.39	54.76	74.00	-19.24	Peak	
2	2390.0000	5.87	32.39	38.26	54.00	-15.74	AVG	
3	2401.9600	56.42	32.43	88.85	74.00	14.85	Peak	No limit
4 *	2401.9600	55.14	32.43	87.57	54.00	33.57	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2402 MHz \_CH00\_1Mbps

**Vertical**

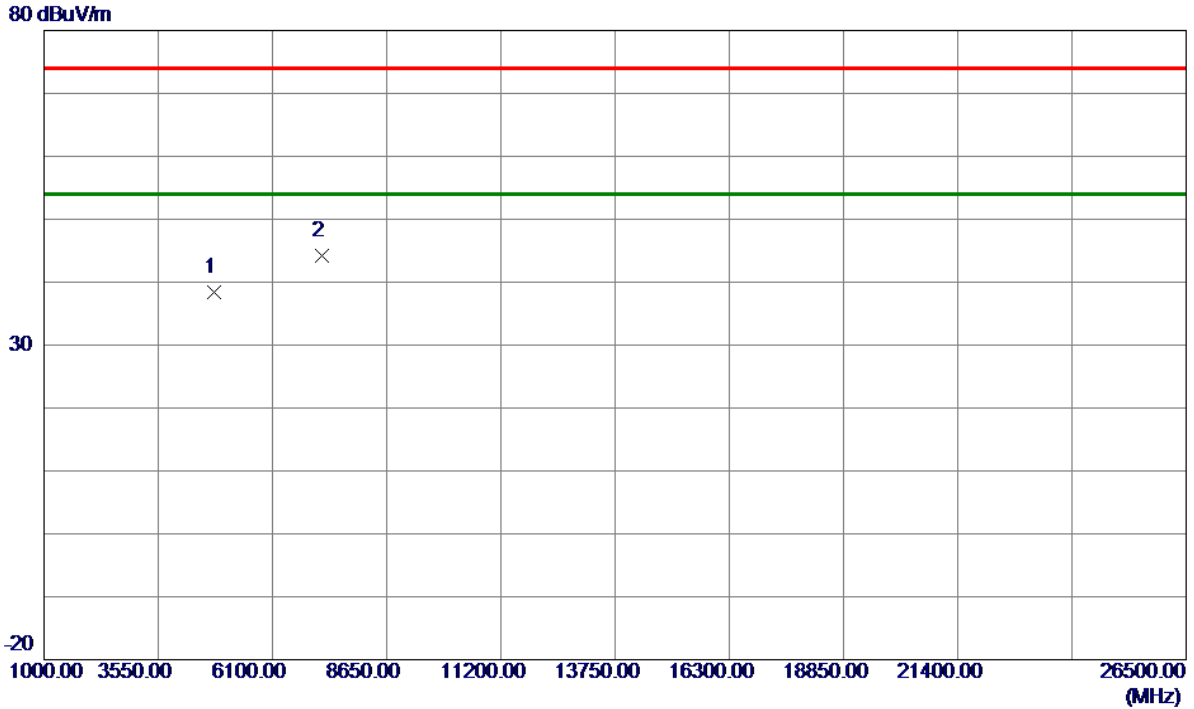


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4804.0000	48.14	-9.76	38.38	74.00	-35.62	Peak	
2 *	7206.0000	47.19	-2.92	44.27	74.00	-29.73	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2402 MHz \_CH00\_1Mbps

### Horizontal

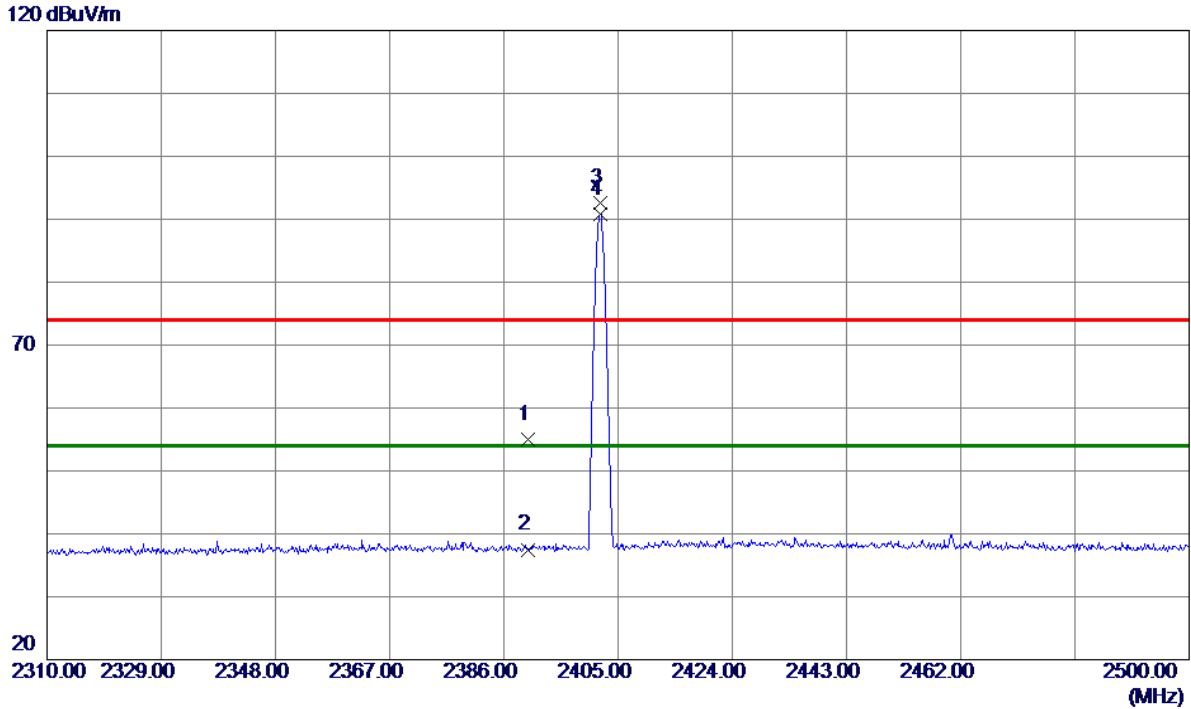

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	22.62	32.39	55.01	74.00	-18.99	Peak	
2	2390.0000	5.11	32.39	37.50	54.00	-16.50	AVG	
3	2401.9600	60.22	32.43	92.65	74.00	18.65	Peak	No limit
4 *	2401.9600	58.40	32.43	90.83	54.00	36.83	AVG	No limit


**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2402 MHz \_CH00\_1Mbps

### Horizontal

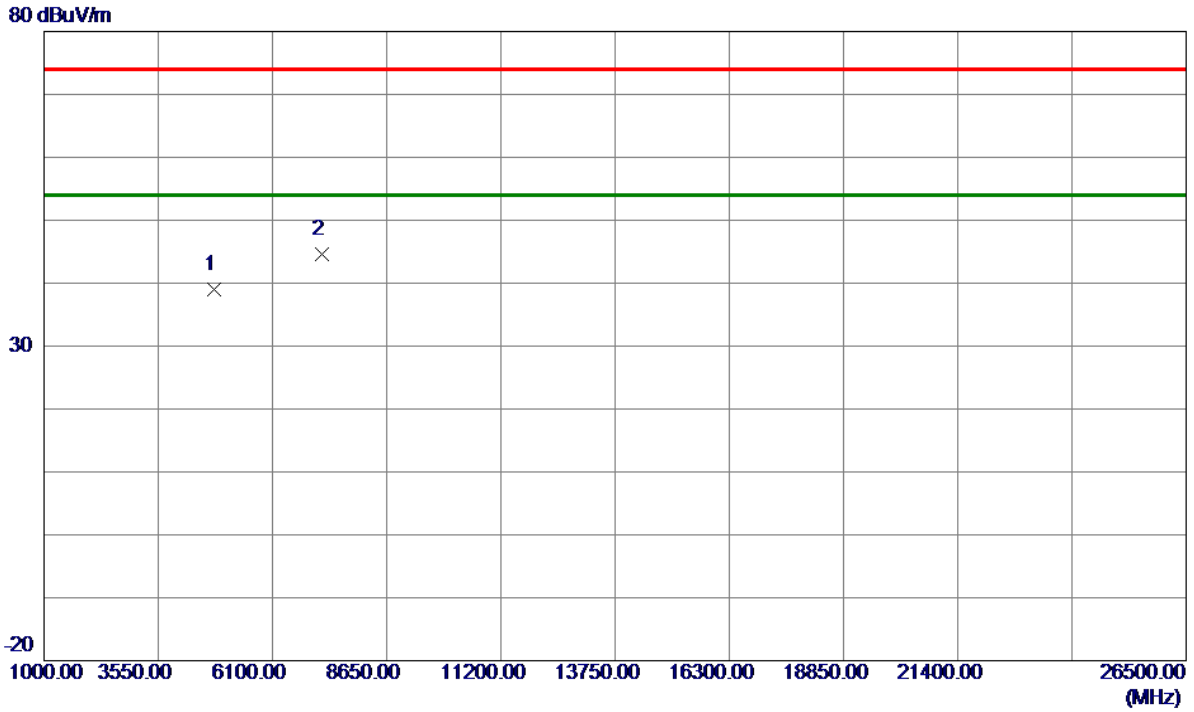


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4804.0000	48.76	-9.76	39.00	74.00	-35.00	Peak	
2 *	7206.0000	47.55	-2.92	44.63	74.00	-29.37	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2441 MHz \_CH39\_1Mbps

**Vertical**

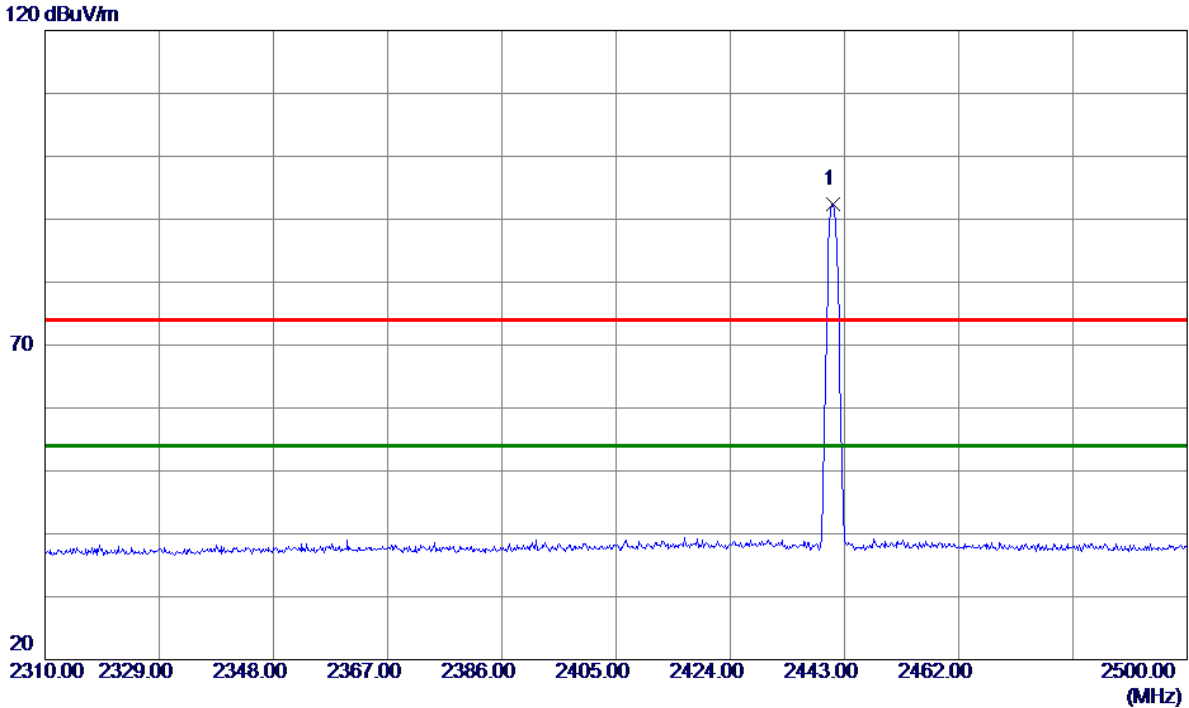


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2441.1000	59.81	32.54	92.35	74.00	18.35	Peak	No limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2441 MHz \_CH39\_1Mbps

### Vertical

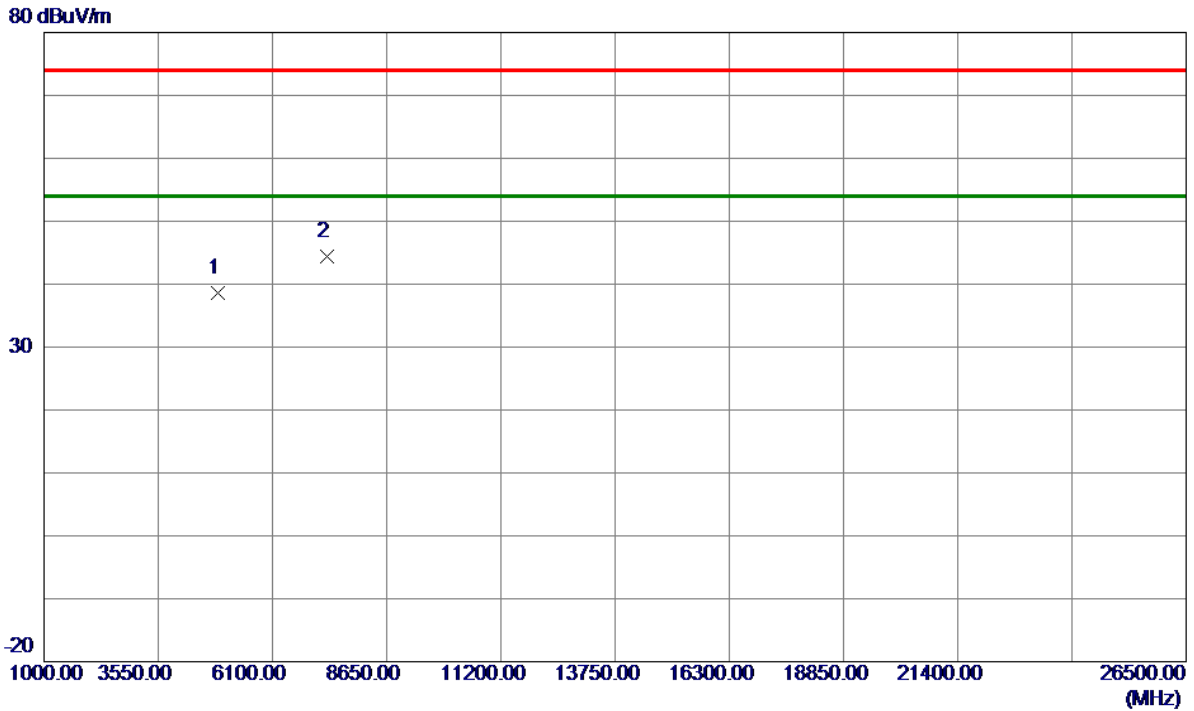


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4882.0000	48.06	-9.47	38.59	74.00	-35.41	Peak	
2 *	7323.0000	47.04	-2.71	44.33	74.00	-29.67	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2441 MHz \_CH39\_1Mbps

### Horizontal

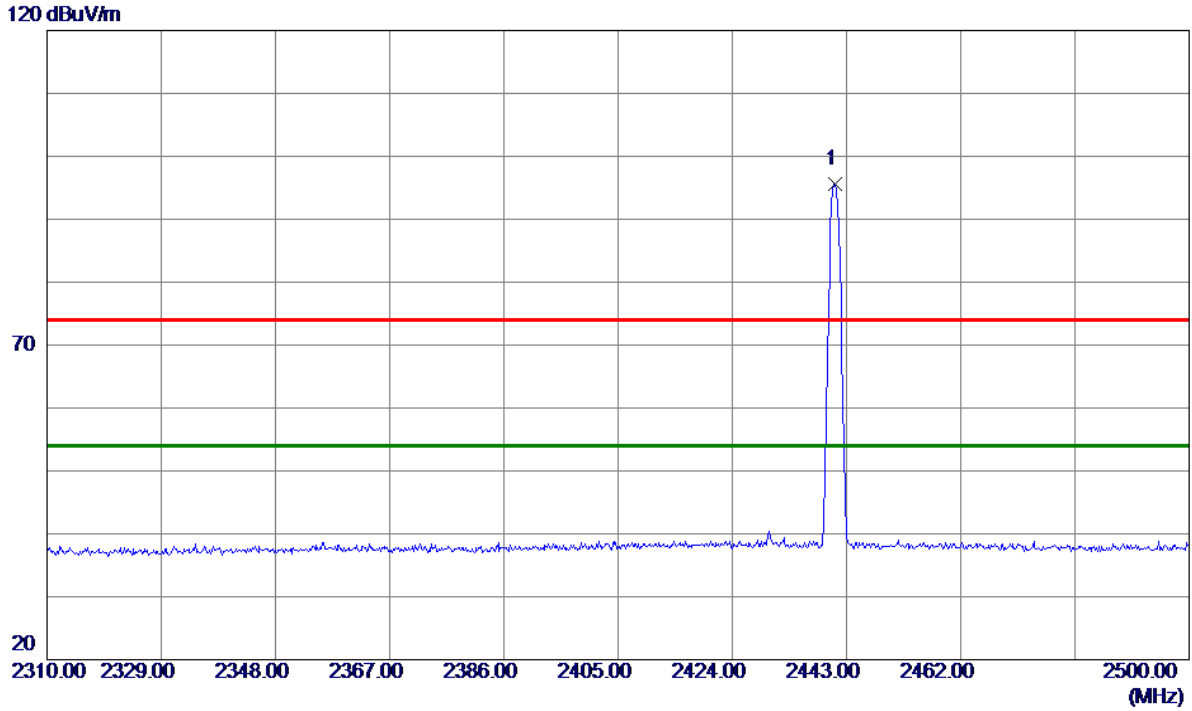

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2441.1000	63.12	32.54	95.66	54.00	41.66	AVG	No limit

**REMARKS:**


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode: TX 2441 MHz \_CH39\_1Mbps

### Horizontal

80 dBuV/m

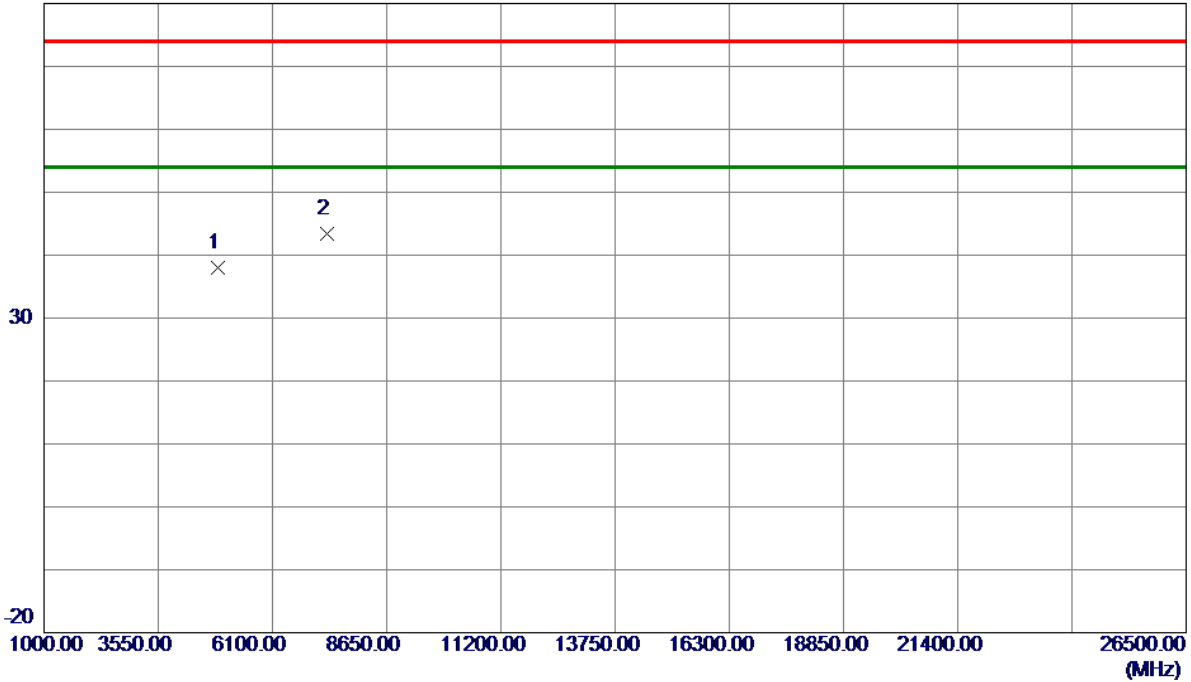


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4882.0000	47.38	-9.47	37.91	74.00	-36.09	Peak	
2 *	7323.0000	46.20	-2.71	43.49	74.00	-30.51	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2480 MHz \_CH78\_1Mbps

**Vertical**

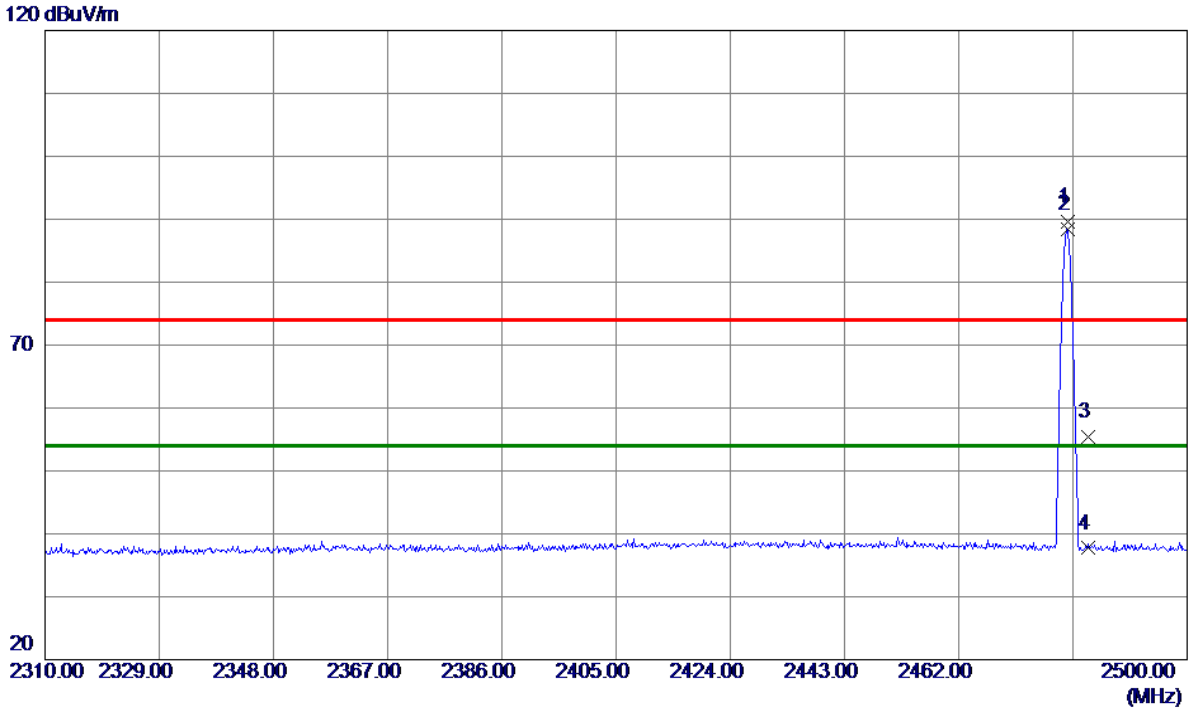


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2480.0500	56.92	32.65	89.57	74.00	15.57	Peak	No limit
2 *	2480.0500	55.76	32.65	88.41	54.00	34.41	AVG	No limit
3	2483.5000	22.66	32.66	55.32	74.00	-18.68	Peak	
4	2483.5000	5.04	32.66	37.70	54.00	-16.30	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2480 MHz \_CH78\_1Mbps

### Vertical

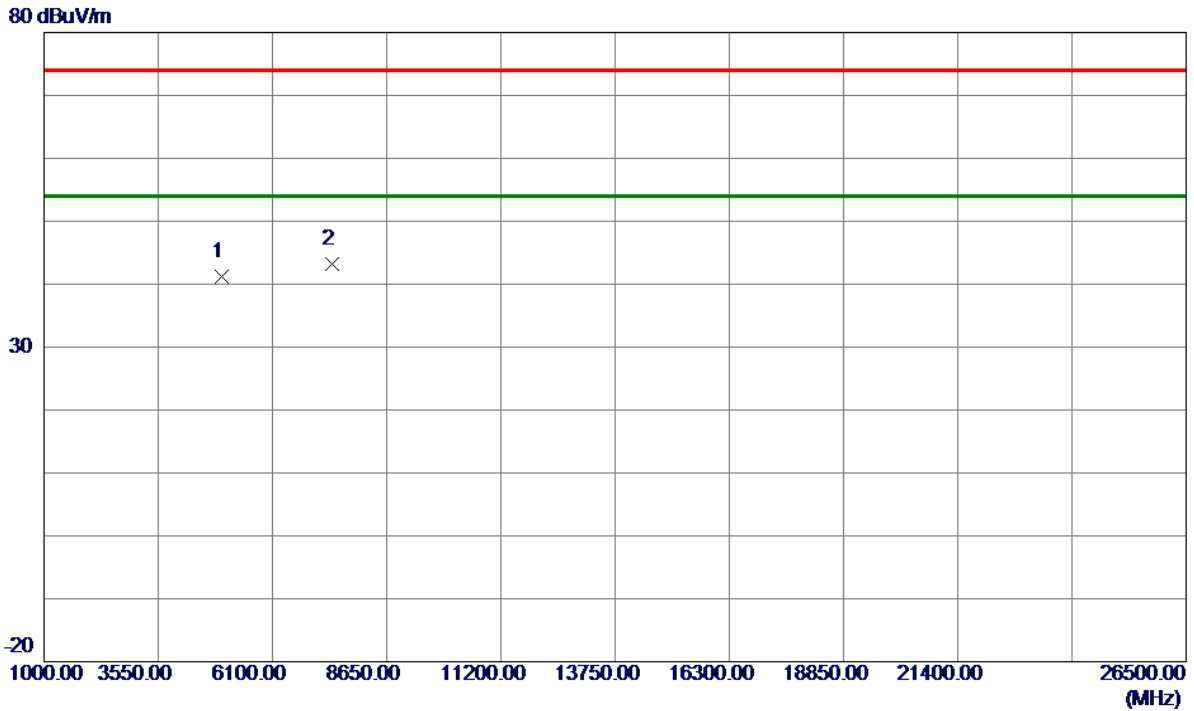


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4960.0000	50.34	-9.17	41.17	74.00	-32.83	Peak	
2 *	7440.0000	45.62	-2.50	43.12	74.00	-30.88	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2480 MHz \_CH78\_1Mbps

### Horizontal

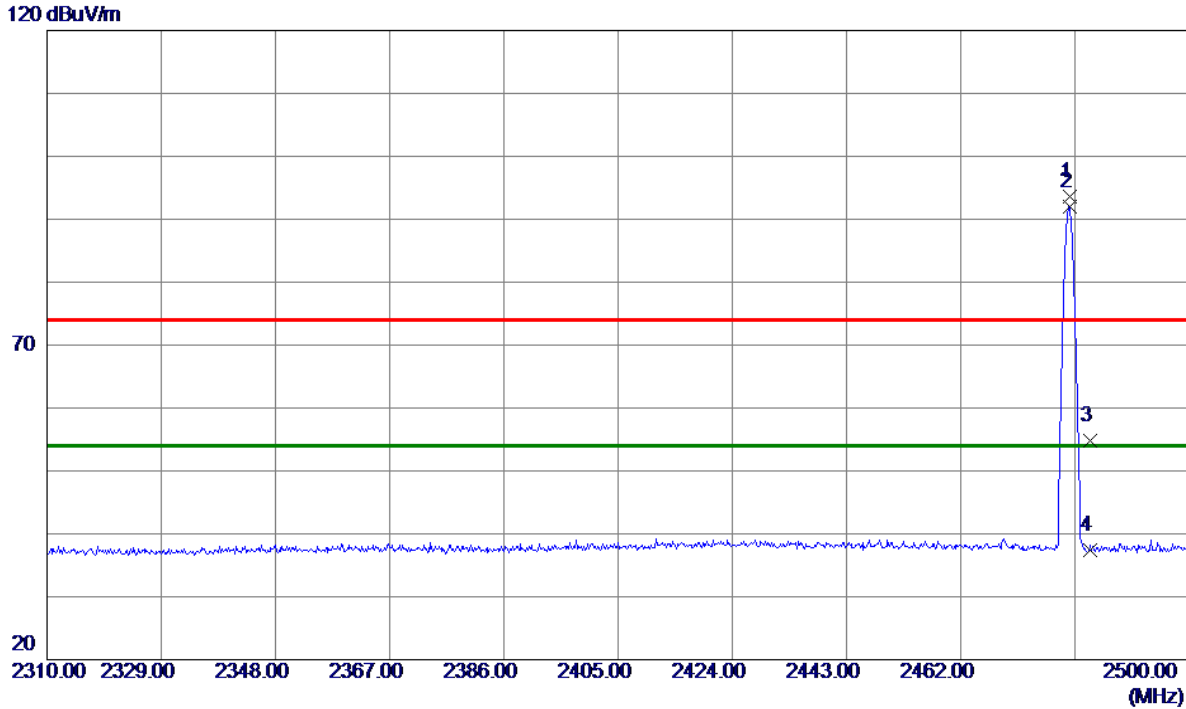

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2480.0500	61.02	32.65	93.67	74.00	19.67	Peak	No limit
2 *	2480.0500	59.42	32.65	92.07	54.00	38.07	AVG	No limit
3	2483.5000	22.15	32.66	54.81	74.00	-19.19	Peak	
4	2483.5000	4.67	32.66	37.33	54.00	-16.67	AVG	

**REMARKS:**


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2480 MHz \_CH78\_1Mbps

### Horizontal

80 dBuV/m

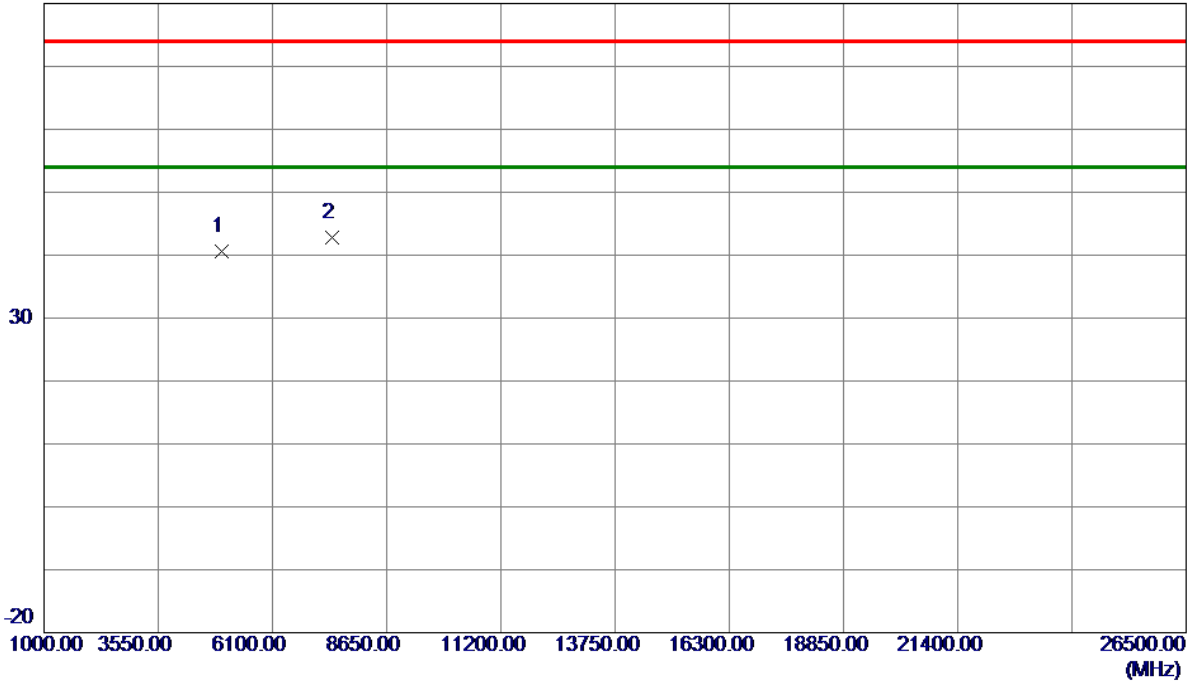

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4960.0000	49.77	-9.17	40.60	74.00	-33.40	Peak	
2 *	7440.0000	45.32	-2.50	42.82	74.00	-31.18	Peak	


**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2402 MHz \_CH00\_3Mbps

### Vertical

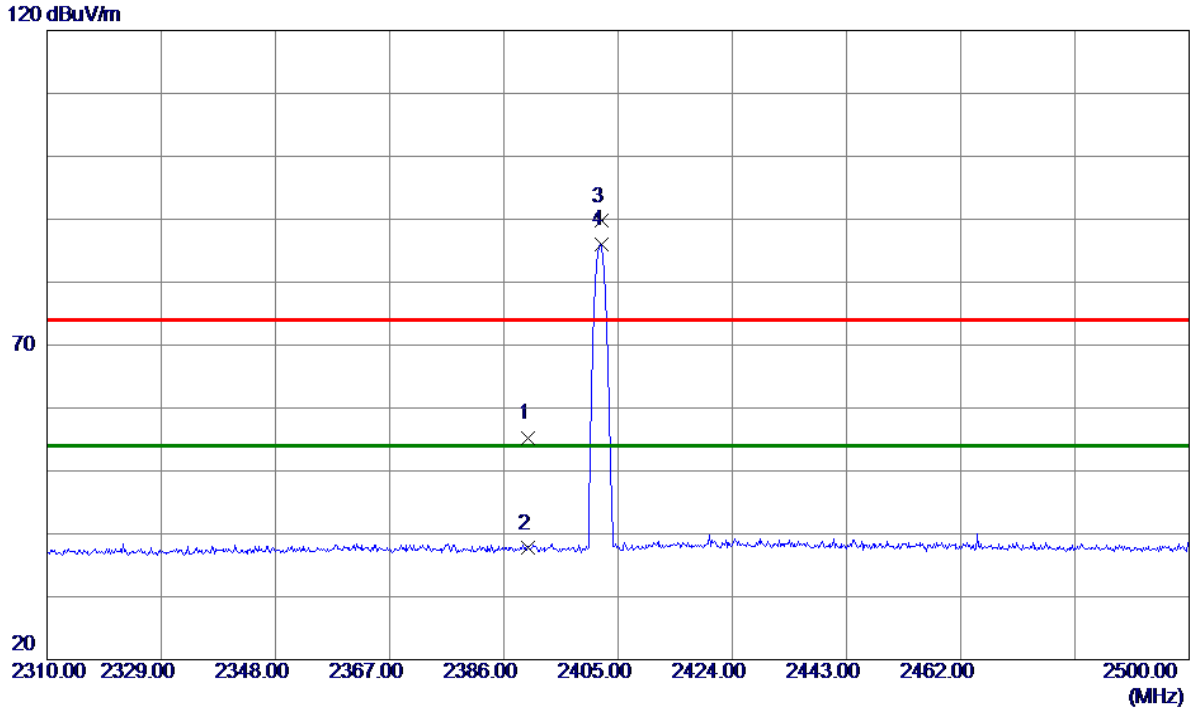


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	22.72	32.39	55.11	74.00	-18.89	Peak	
2	2390.0000	5.31	32.39	37.70	54.00	-16.30	AVG	
3	2402.1500	57.27	32.43	89.70	74.00	15.70	Peak	No limit
4 *	2402.1500	53.62	32.43	86.05	54.00	32.05	AVG	No limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2402 MHz \_CH00\_3Mbps

### Vertical

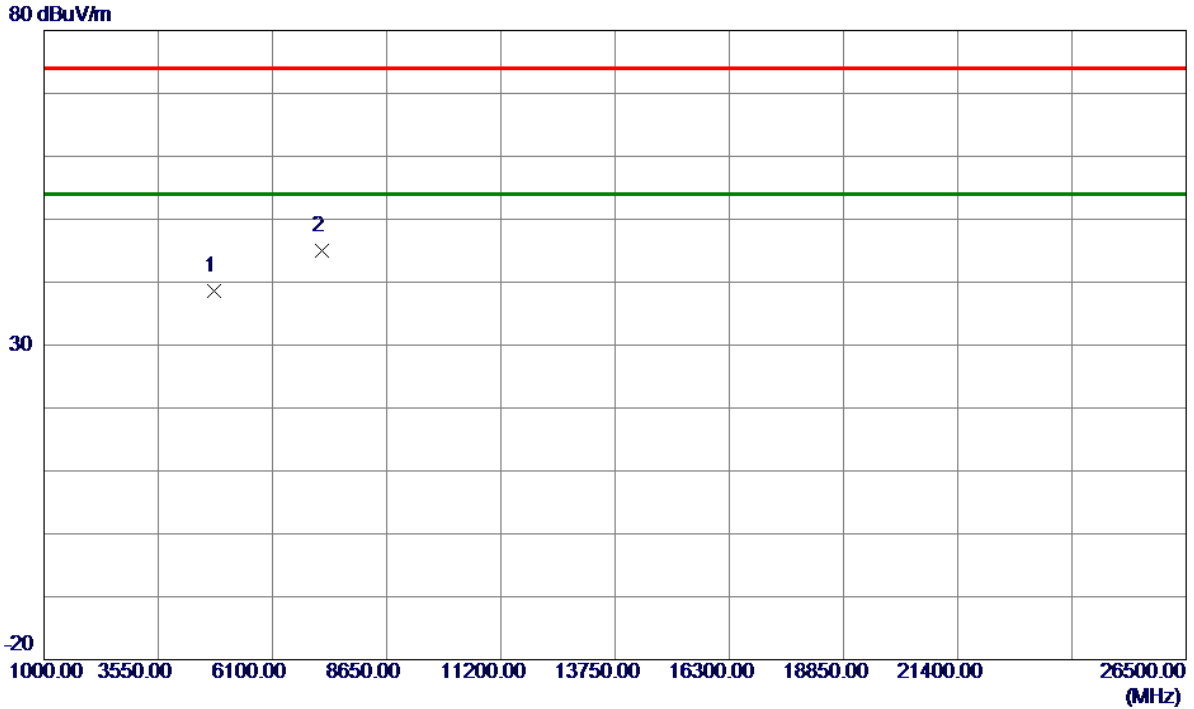


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4804.0000	48.36	-9.76	38.60	74.00	-35.40	Peak	
2 *	7206.0000	47.93	-2.92	45.01	74.00	-28.99	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2402 MHz \_CH00\_3Mbps

### Horizontal

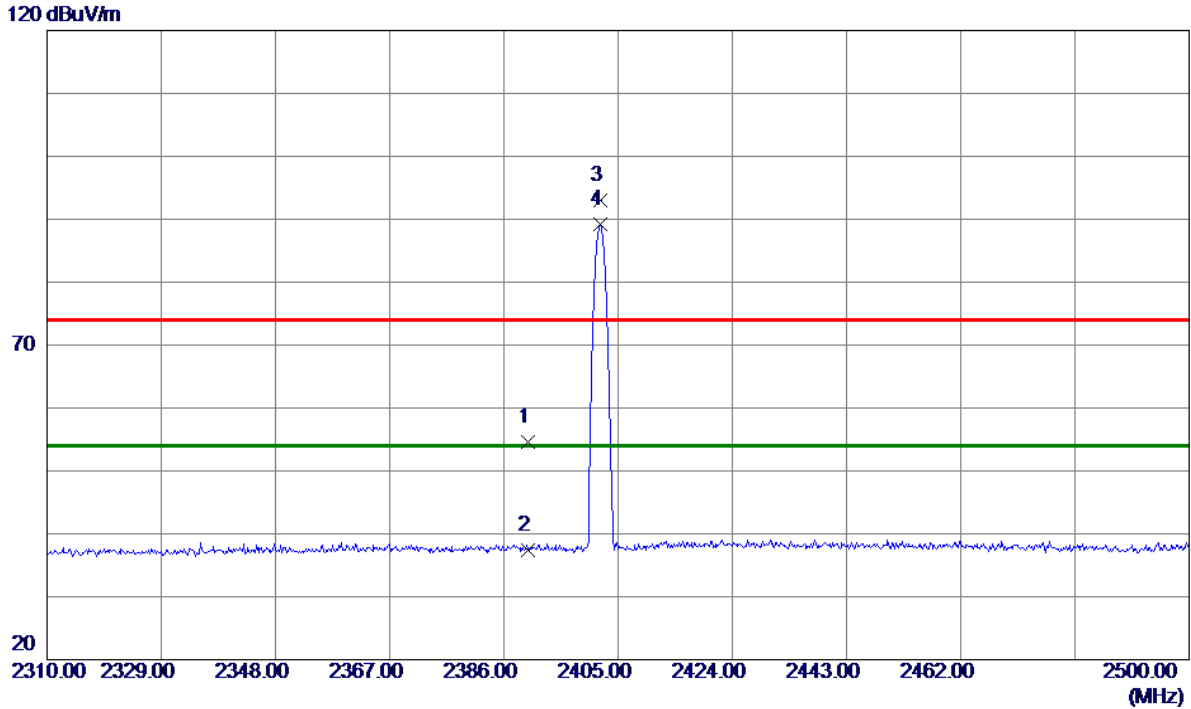

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	22.19	32.39	54.58	74.00	-19.42	Peak	
2	2390.0000	5.05	32.39	37.44	54.00	-16.56	AVG	
3	2401.9600	60.47	32.43	92.90	74.00	18.90	Peak	No limit
4 *	2401.9600	56.69	32.43	89.12	54.00	35.12	AVG	No limit

**REMARKS:**


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.



Test Mode: TX 2402 MHz \_CH00\_3Mbps

### Horizontal

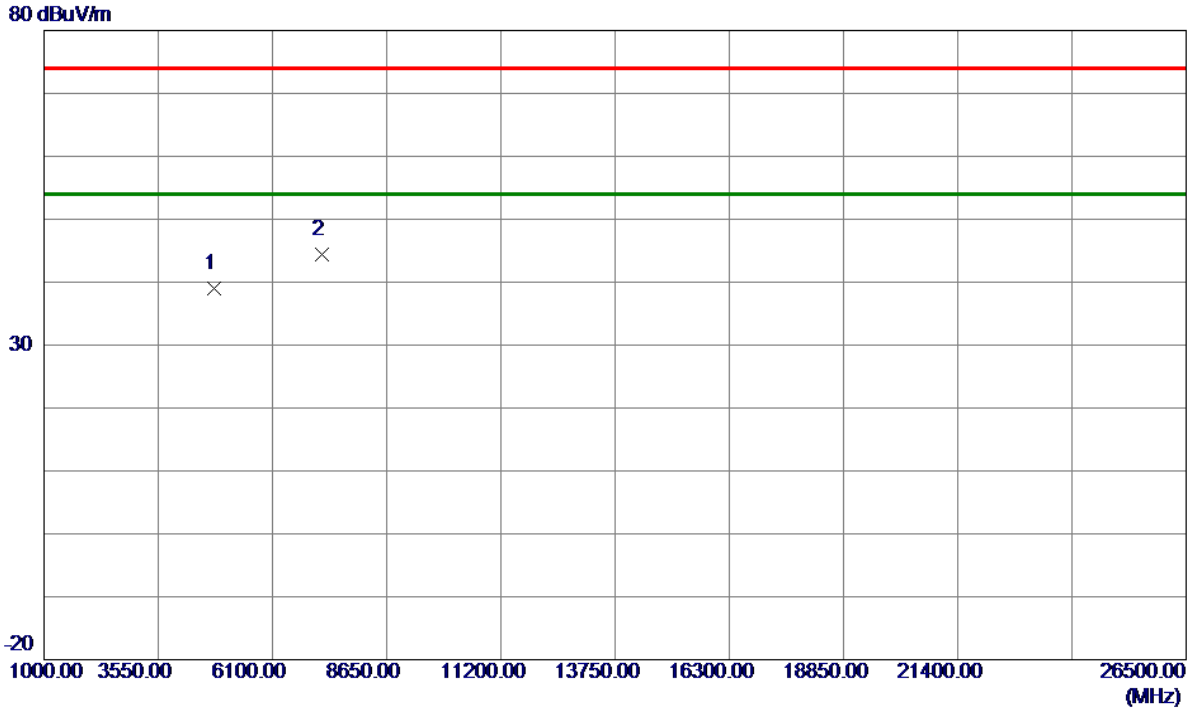


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4804.0000	48.71	-9.76	38.95	74.00	-35.05	Peak	
2 *	7206.0000	47.40	-2.92	44.48	74.00	-29.52	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2441 MHz \_CH39\_3Mbps

**Vertical**

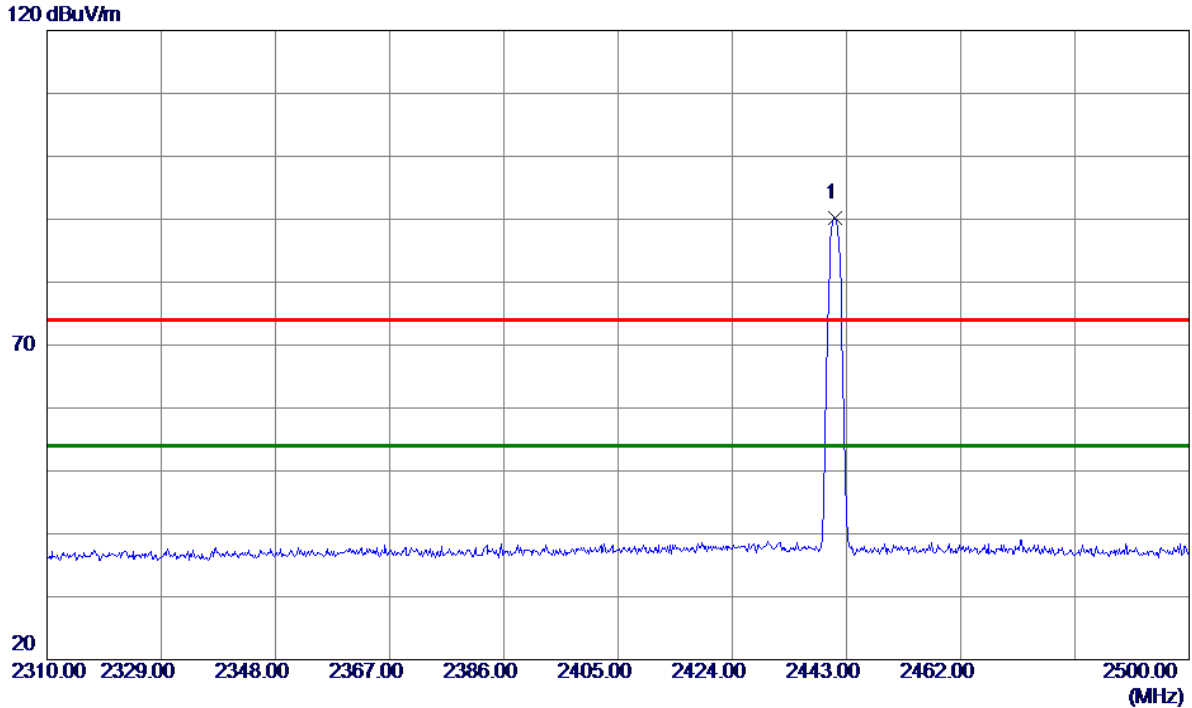


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2441.1000	57.70	32.54	90.24	54.00	36.24	AVG	No limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2441 MHz \_CH39\_3Mbps

### Vertical

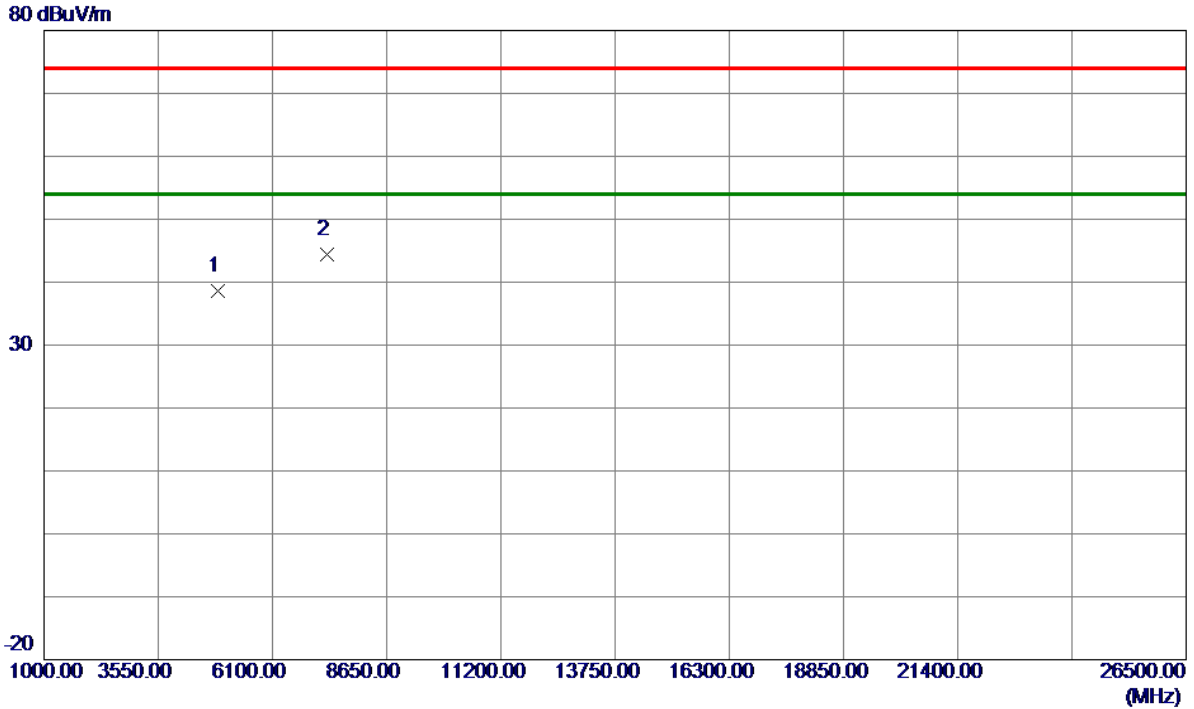


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4882.0000	48.06	-9.47	38.59	74.00	-35.41	Peak	
2 *	7323.0000	47.04	-2.71	44.33	74.00	-29.67	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2441 MHz \_CH39\_3Mbps

### Horizontal

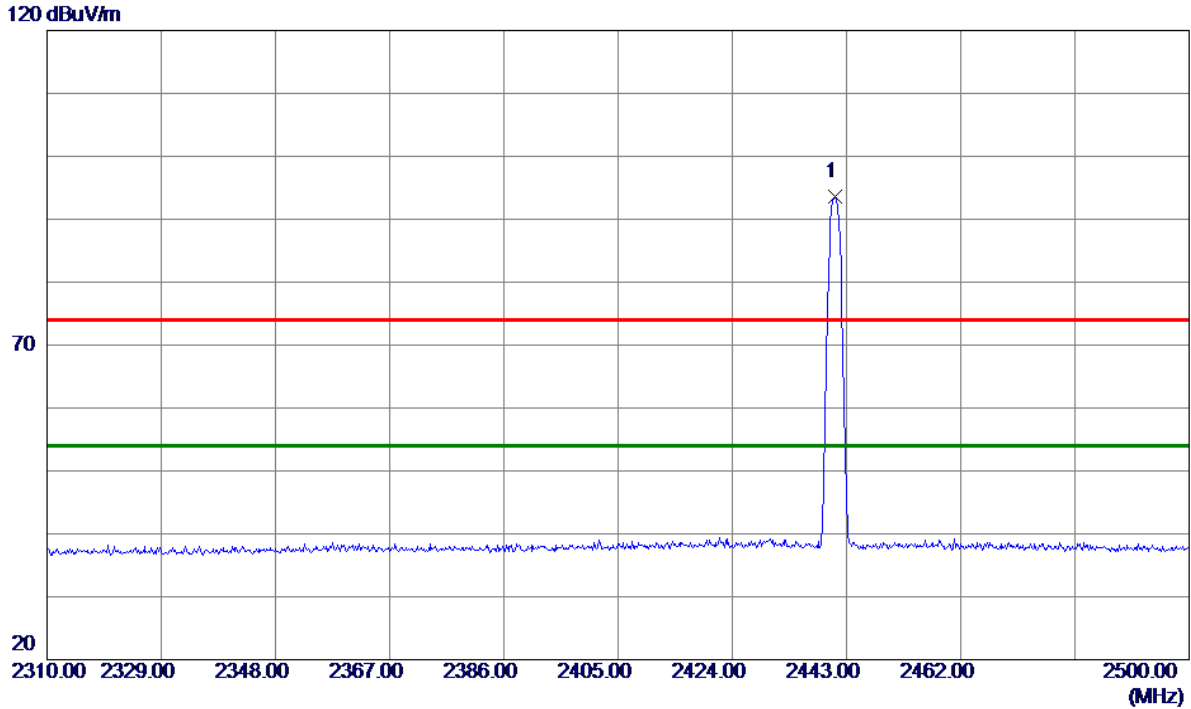

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2441.1000	60.98	32.54	93.52	54.00	39.52	AVG	No limit

**REMARKS:**


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2441 MHz \_CH39\_3Mbps

### Horizontal

80 dBuV/m

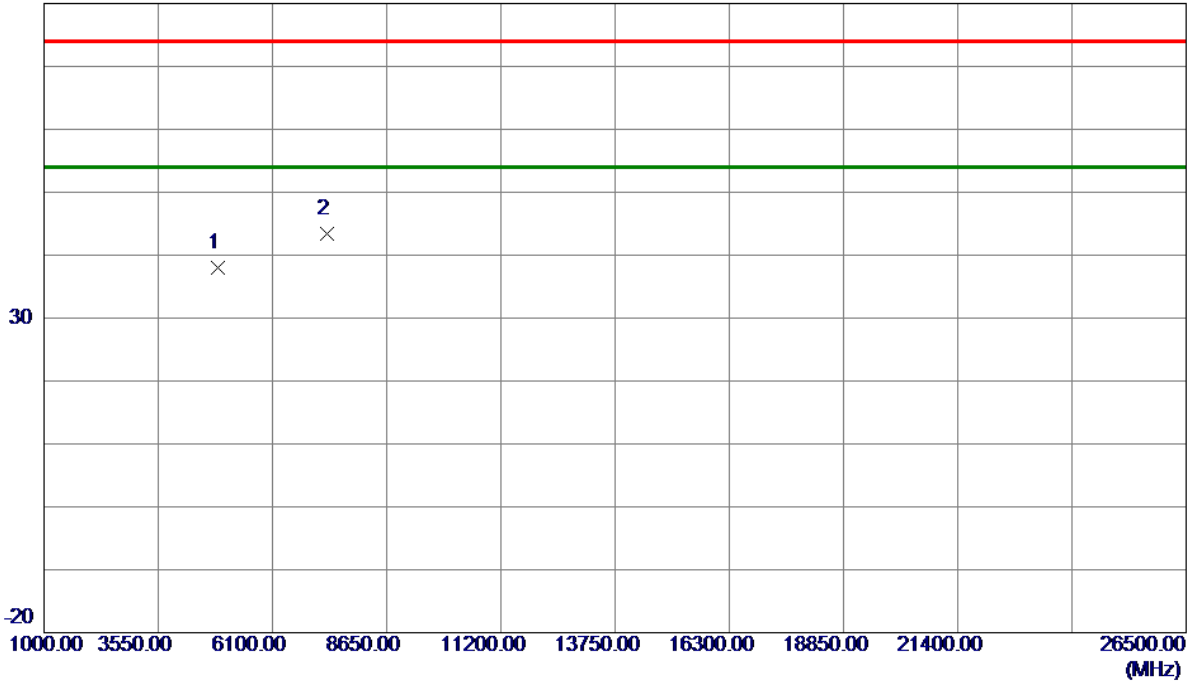

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4882.0000	47.38	-9.47	37.91	74.00	-36.09	Peak	
2 *	7323.0000	46.20	-2.71	43.49	74.00	-30.51	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2480 MHz \_CH78\_3Mbps

**Vertical**

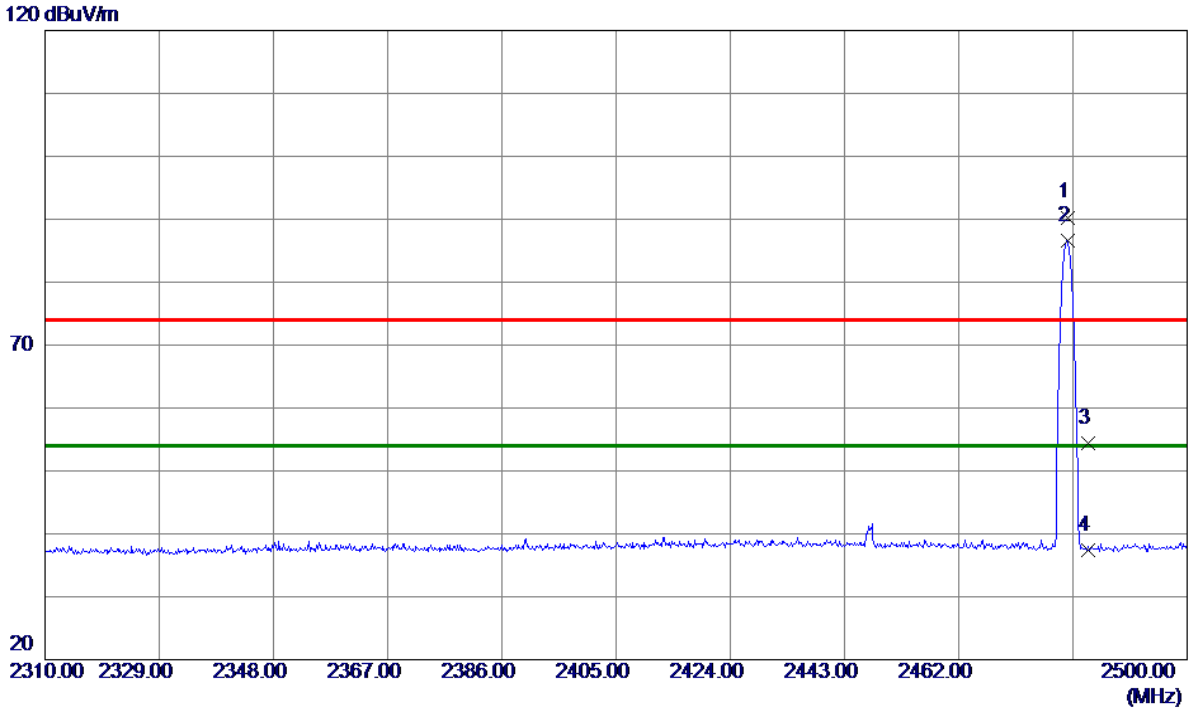

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2480.0500	57.65	32.65	90.30	74.00	16.30	Peak	No limit
2 *	2480.0500	53.92	32.65	86.57	54.00	32.57	AVG	No limit
3	2483.5000	21.71	32.66	54.37	74.00	-19.63	Peak	
4	2483.5000	4.80	32.66	37.46	54.00	-16.54	AVG	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2480 MHz \_CH78\_3Mbps

### Vertical

80 dBuV/m

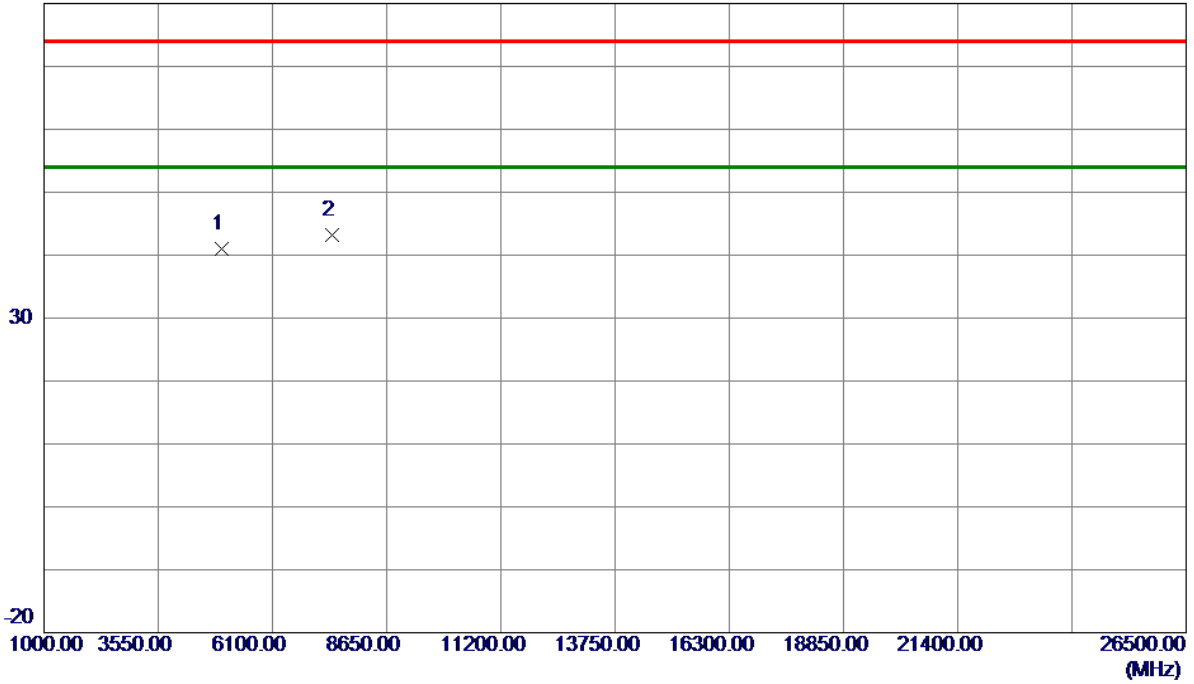

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4960.0000	50.22	-9.17	41.05	74.00	-32.95	Peak	
2 *	7440.0000	45.63	-2.50	43.13	74.00	-30.87	Peak	


**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX 2480 MHz \_CH78\_3Mbps

### Horizontal

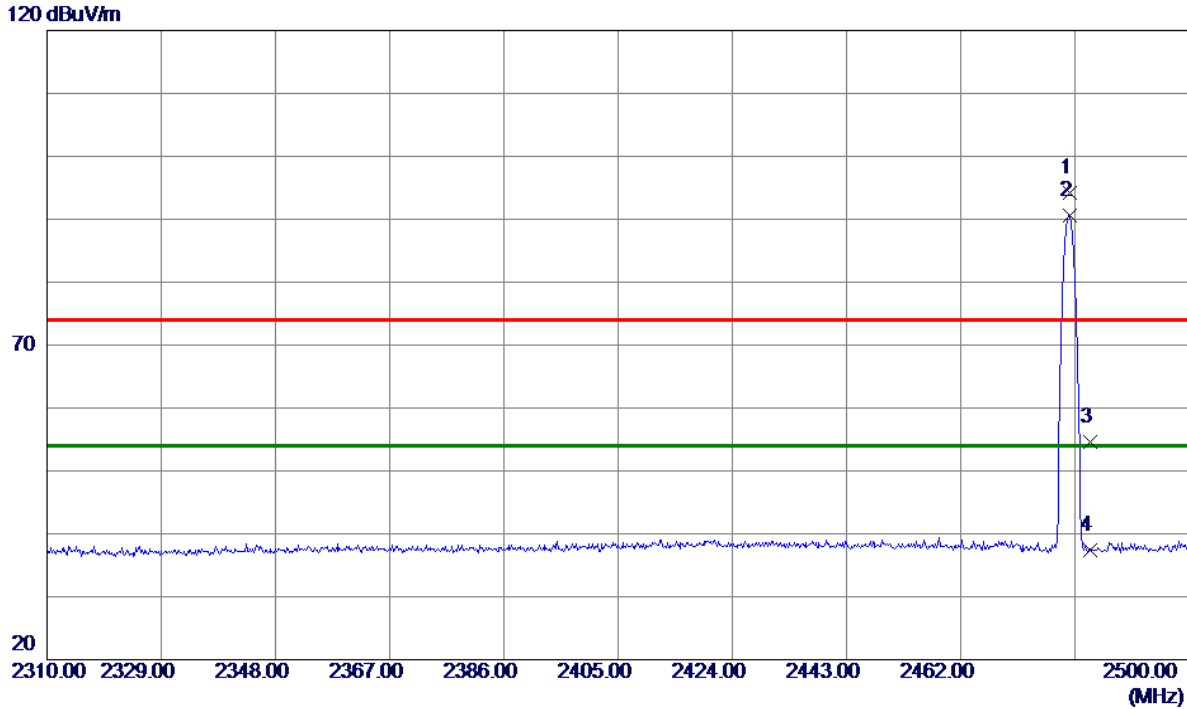

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2480.0500	61.55	32.65	94.20	74.00	20.20	Peak	No limit
2 *	2480.0500	58.01	32.65	90.66	54.00	36.66	AVG	No limit
3	2483.5000	22.03	32.66	54.69	74.00	-19.31	Peak	
4	2483.5000	4.70	32.66	37.36	54.00	-16.64	AVG	

**REMARKS:**


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode: TX 2480 MHz \_CH78\_3Mbps

### Horizontal

80 dBuV/m

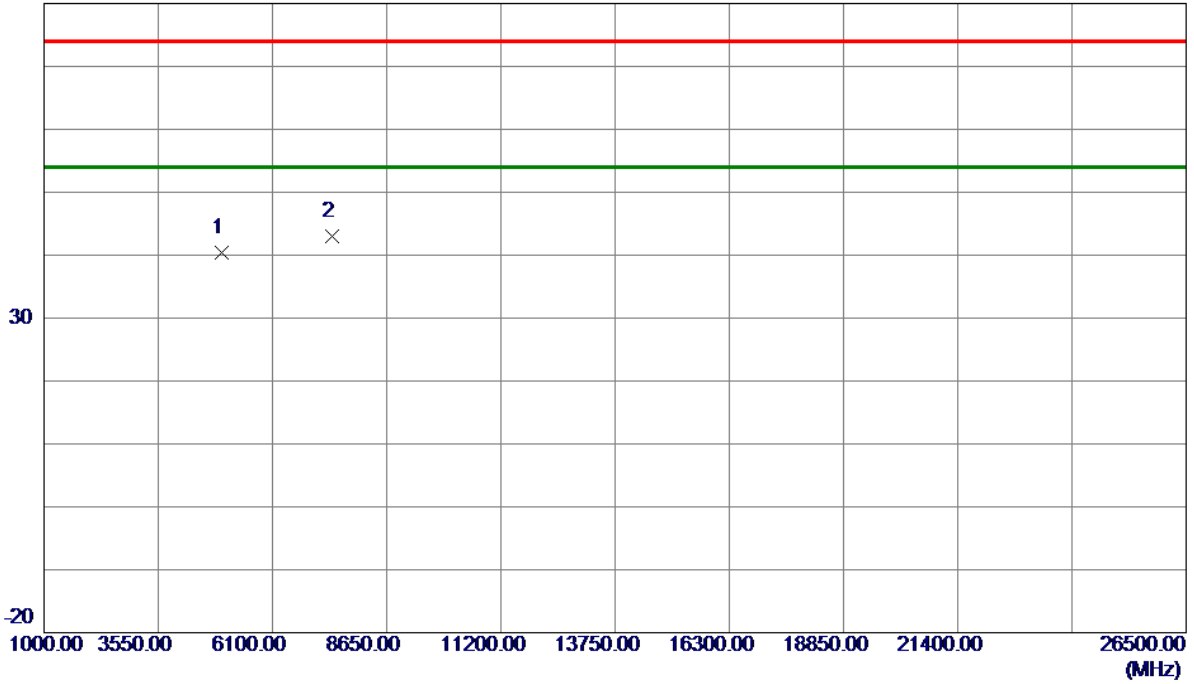


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4960.0000	49.48	-9.17	40.31	74.00	-33.69	Peak	
2 *	7440.0000	45.51	-2.50	43.01	74.00	-30.99	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


**APPENDIX D - NUMBER OF HOPPING FREQUENCY**

Test Mode	Hopping Mode_1Mbps
Number of Hopping Frequency	79

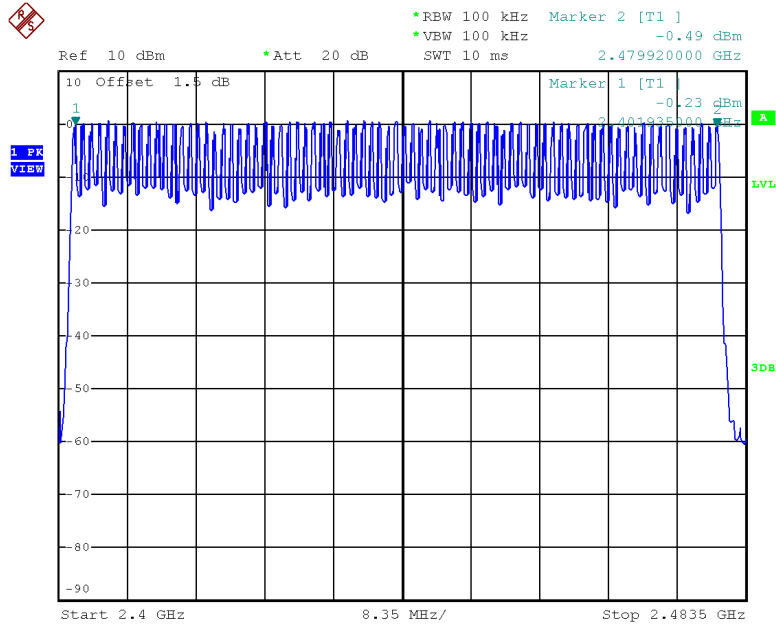

Date: 15.JAN.2020 15:49:01

Test Mode	Hopping Mode_3Mbps
Number of Hopping Frequency	79

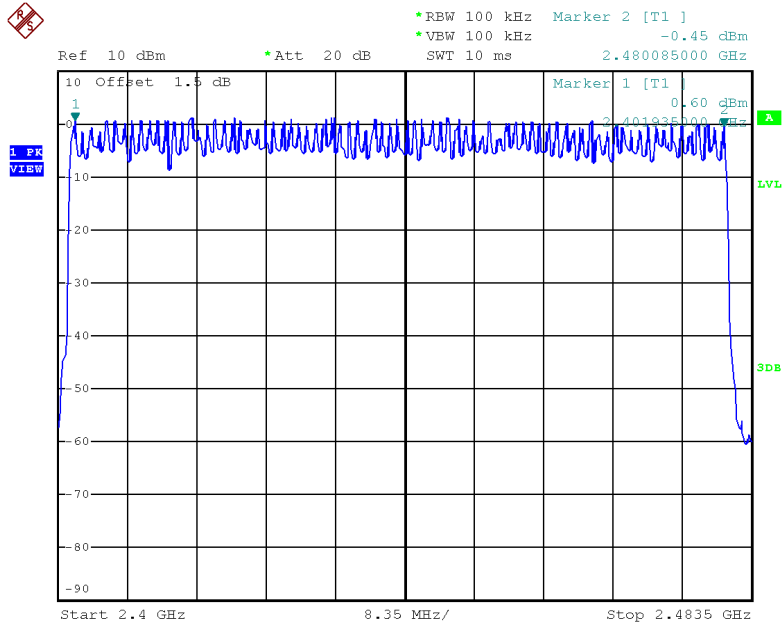


Date: 15.JAN.2020 15:58:55


## **APPENDIX E - AVERAGE TIME OF OCCUPANCY**

Test Mode:	TX Mode_1Mbps
------------	---------------


Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
DH1	2402	0.3850	0.1232	0.4000	Pass
DH3	2402	1.6400	0.2624	0.4000	Pass
DH5	2402	2.8800	0.3073	0.4000	Pass
DH1	2441	0.3850	0.1232	0.4000	Pass
DH3	2441	1.6400	0.2624	0.4000	Pass
DH5	2441	2.8800	0.3073	0.4000	Pass
DH1	2480	0.3850	0.1232	0.4000	Pass
DH3	2480	1.6400	0.2624	0.4000	Pass
DH5	2480	2.8800	0.3073	0.4000	Pass

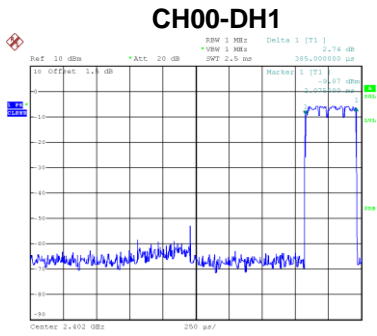


Date: 15.JAN.2020 15:42:14

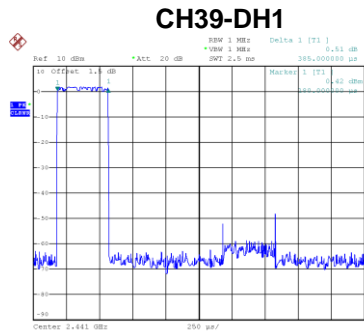


Date: 15.JAN.2020 15:42:28

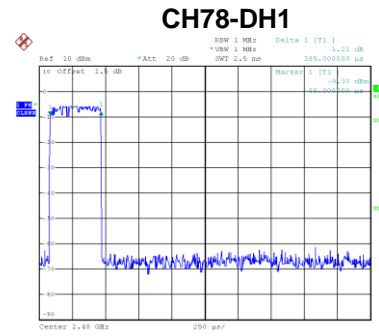


Date: 15.JAN.2020 15:42:31

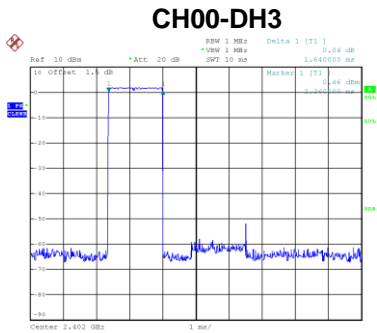


Date: 15.JAN.2020 15:42:51

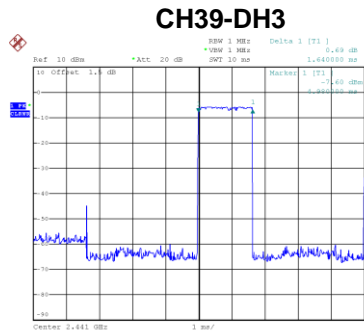


Date: 15.JAN.2020 15:42:54

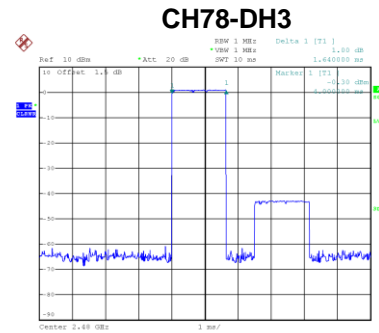


Date: 15.JAN.2020 15:42:58

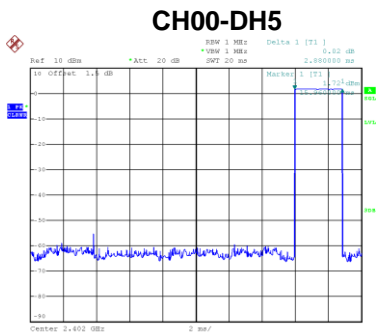

Date: 15.JAN.2020 15:43:21

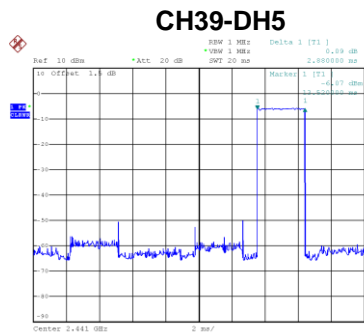


Date: 15.JAN.2020 15:43:24

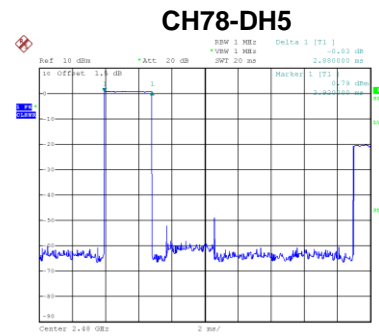


Date: 15.JAN.2020 15:43:30

Test Mode:	TX Mode_3Mbps
------------	---------------


Data Packet	Frequency	Pulse Duration(ms)	Dwell Time(s)	Limits(s)	Test Result
3DH1	2402	0.3950	0.1264	0.4000	Pass
3DH3	2402	1.6200	0.2592	0.4000	Pass
3DH5	2402	2.8800	0.3073	0.4000	Pass
3DH1	2441	0.3900	0.1248	0.4000	Pass
3DH3	2441	1.6200	0.2592	0.4000	Pass
3DH5	2441	2.8800	0.3073	0.4000	Pass
3DH1	2480	0.3950	0.1264	0.4000	Pass
3DH3	2480	1.6600	0.2656	0.4000	Pass
3DH5	2480	2.8800	0.3073	0.4000	Pass

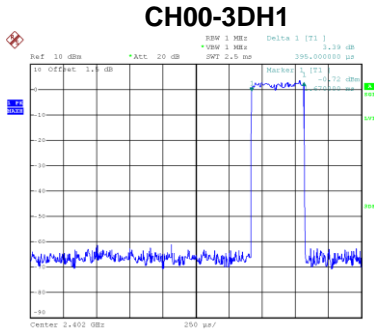


Date: 15.JAN.2020 15:38:14

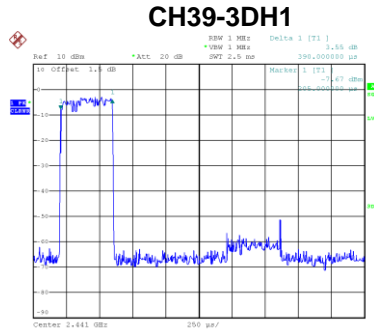


Date: 15.JAN.2020 15:39:14

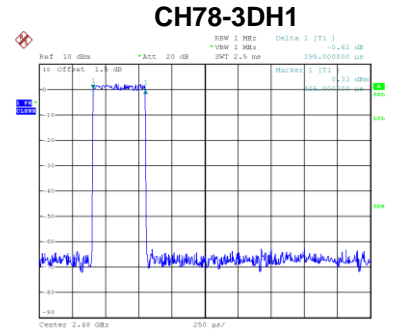


Date: 15.JAN.2020 15:38:27

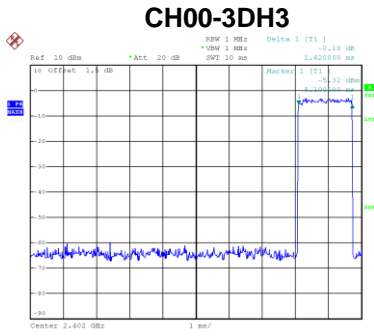


Date: 15.JAN.2020 15:40:142

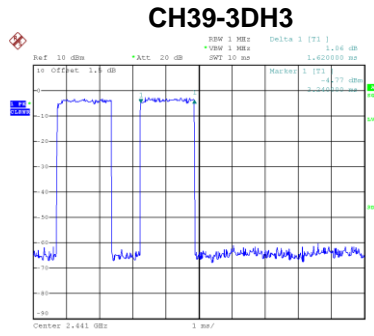


Date: 15.JAN.2020 15:40:146

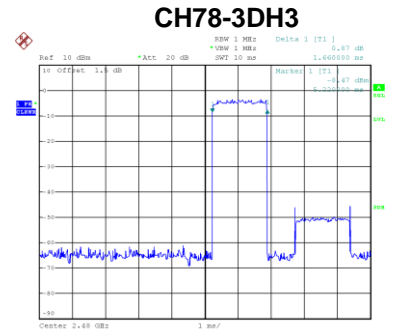


Date: 15.JAN.2020 15:40:151

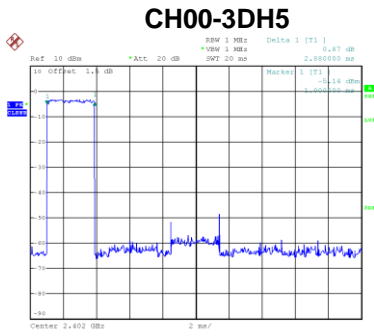

Date: 15.JAN.2020 15:41:15

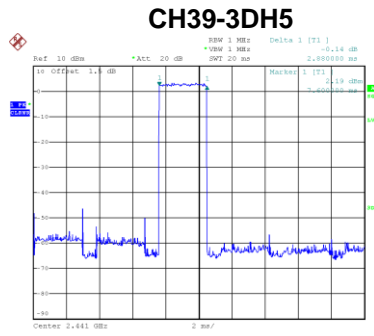

Date: 15.JAN.2020 15:41:10

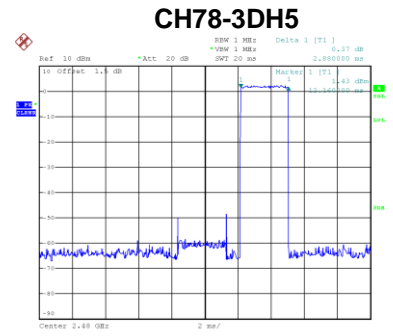


Date: 15.JAN.2020 15:41:26




## **APPENDIX F - HOPPING CHANNEL SEPARATION MEASUREMENT**

Test Mode: Hopping on \_1Mbps


Channel	Frequency (MHz)	Channel Separation (MHz)	20 dB Bandwidth (MHz)	Test Result
00	2402	1.002	0.936	Pass
39	2441	0.996	0.938	Pass
78	2480	1.002	0.936	Pass

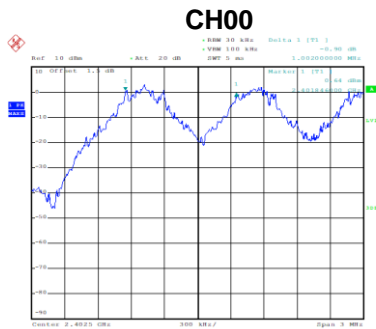

Date: 15.JAN.2020 15:11:52

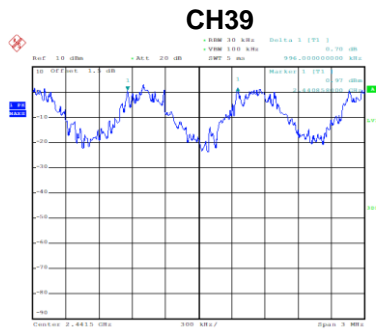


Date: 15.JAN.2020 15:14:22

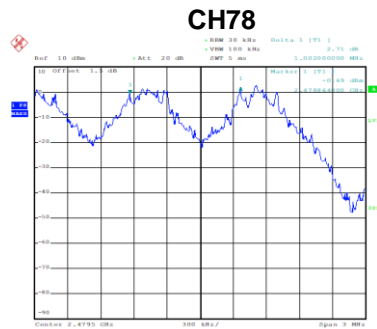


Date: 15.JAN.2020 15:16:13

Test Mode: Hopping on \_3Mbps


Channel	Frequency (MHz)	Channel Separation (MHz)	2/3 of 20 dB Bandwidth (MHz)	Test Result
00	2402	0.996	0.901	Pass
39	2441	1.002	0.897	Pass
78	2480	1.002	0.900	Pass

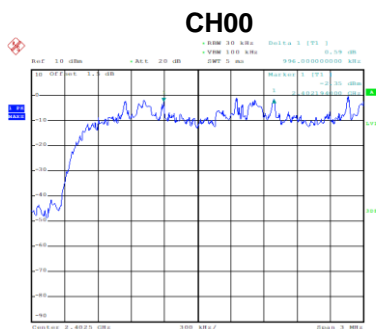

Date: 15.JAN.2020 15:33:46

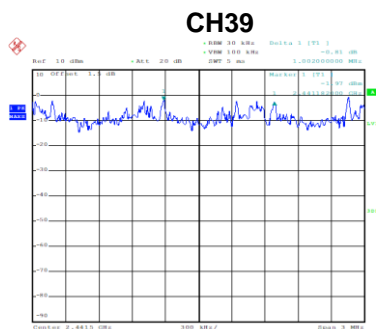

Date: 15.JAN.2020 15:30:22

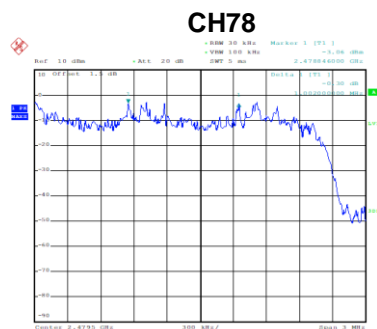


Date: 15.JAN.2020 15:28:18


## APPENDIX G - BANDWIDTH

Test Mode: TX Mode \_1Mbps


Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
00	2402	0.936
39	2441	0.938
78	2480	0.936

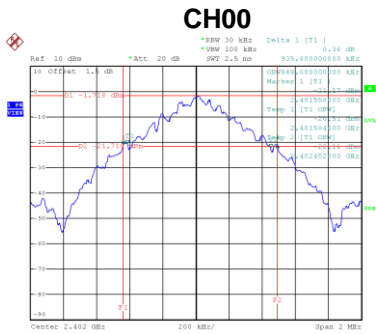

Date: 6.JAN.2020 10:12:07

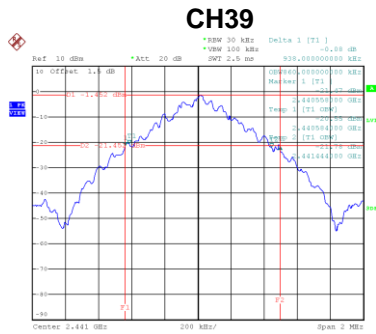


Date: 6.JAN.2020 10:28:36

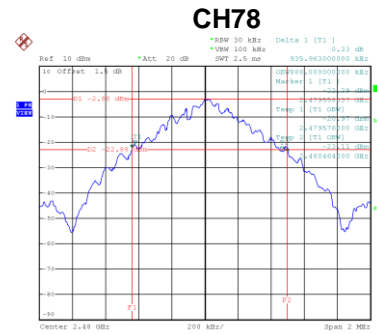


Date: 6.JAN.2020 10:33:15

Test Mode: TX Mode \_3Mbps


Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
00	2402	1.352
39	2441	1.346
78	2480	1.350

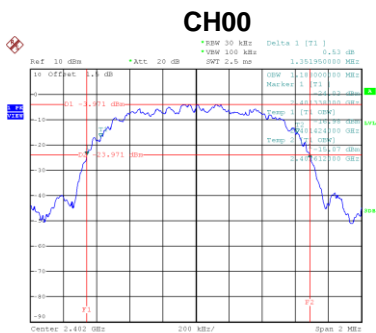

Date: 6.JAN.2020 10:45:39

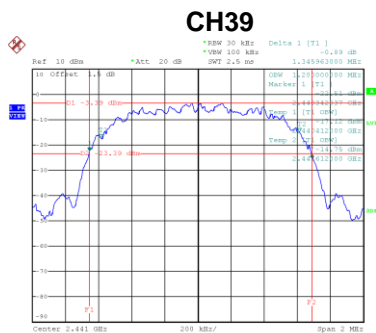

Date: 6.JAN.2020 10:59:08



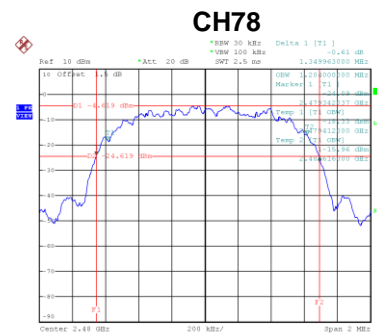


Date: 6.JAN.2020 11:00:41

## **APPENDIX H - MAXIMUM OUTPUT POWER**




Test Mode: TX Mode \_1Mbps

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
00	2402	1.83	0.0015	30.00	1.00	Pass
39	2441	1.64	0.0015	30.00	1.00	Pass
78	2480	0.95	0.0012	30.00	1.00	Pass

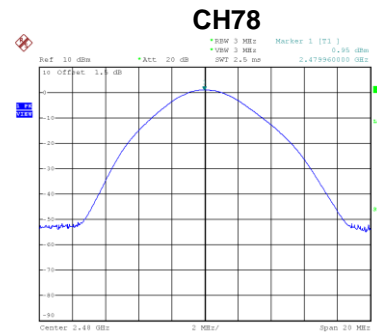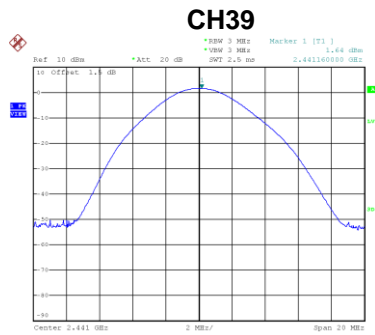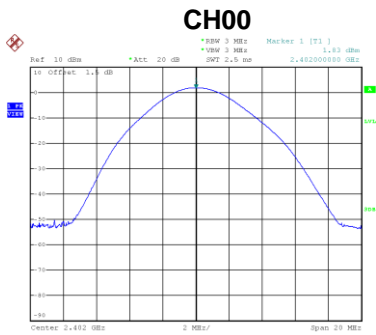


Test Mode: TX Mode \_2Mbps

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
00	2402	5.82	0.0038	21.00	0.125	Pass
39	2441	5.76	0.0038	21.00	0.125	Pass
78	2480	5.06	0.0032	21.00	0.125	Pass

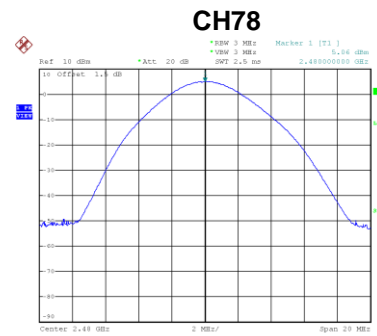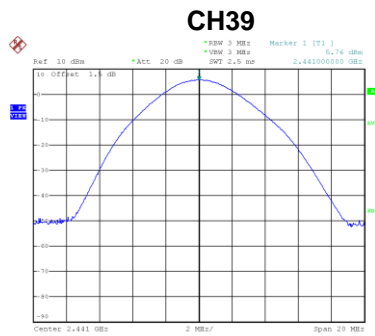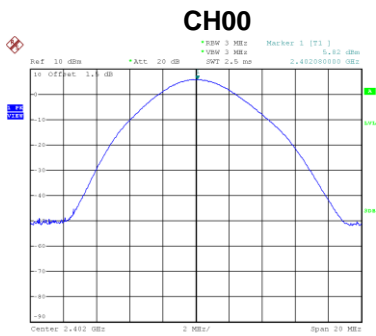


Test Mode:	TX Mode _3Mbps
------------	----------------


Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
00	2402	6.38	0.0043	21.00	0.125	Pass
39	2441	6.20	0.0042	21.00	0.125	Pass
78	2480	5.48	0.0035	21.00	0.125	Pass

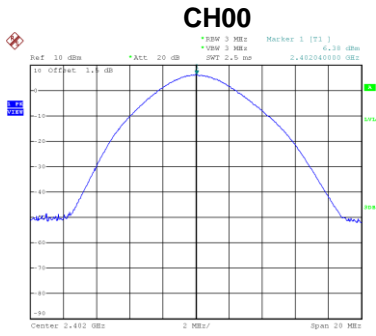

Date: 6.JAN.2020 10:46:11

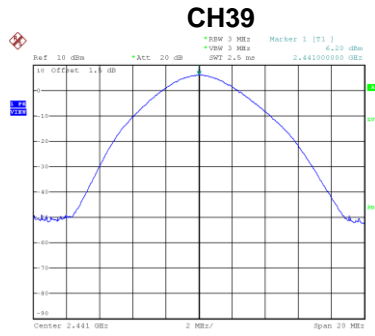

Date: 6.JAN.2020 10:59:14

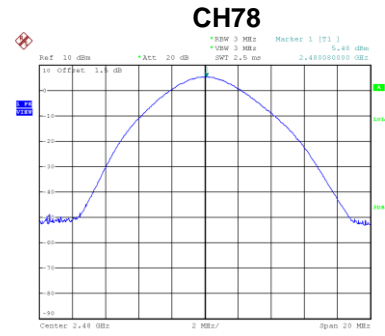


Date: 6.JAN.2020 11:01:14

## **APPENDIX I - CONDUCTED SPURIOUS EMISSION**




## Test Mode : TX Mode \_1Mbps

### Bandedge CH00 (Lower)

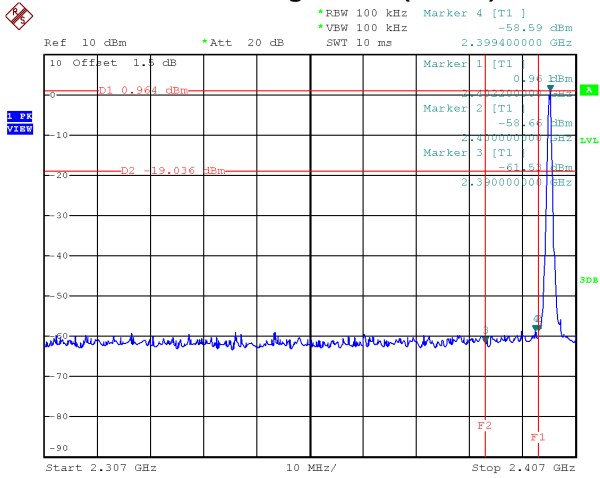


### Bandedge CH78 (Upper)

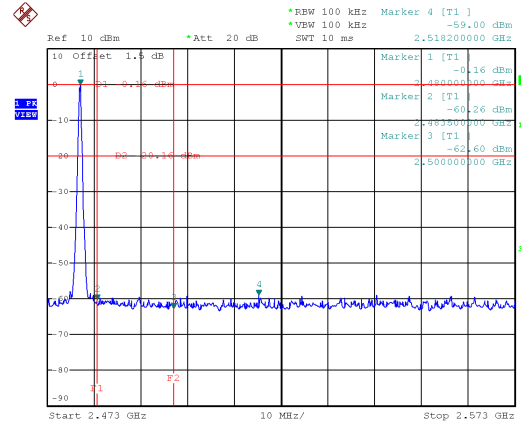


Date: 6.JAN.2020 10:32:41

Date: 6.JAN.2020 10:11:32

### Hopping on mode (Lower)

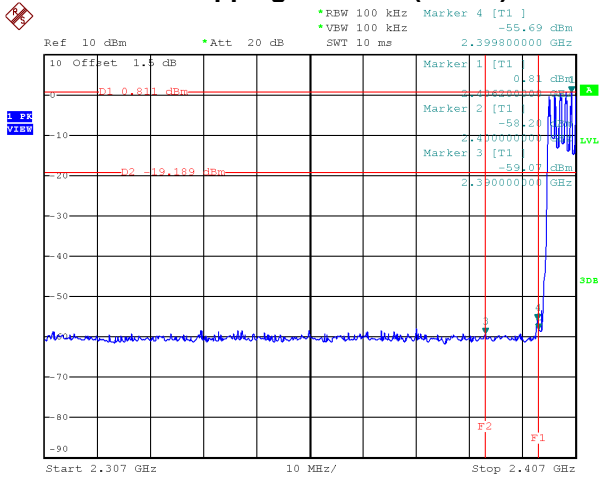


### Hopping on mode (Upper)

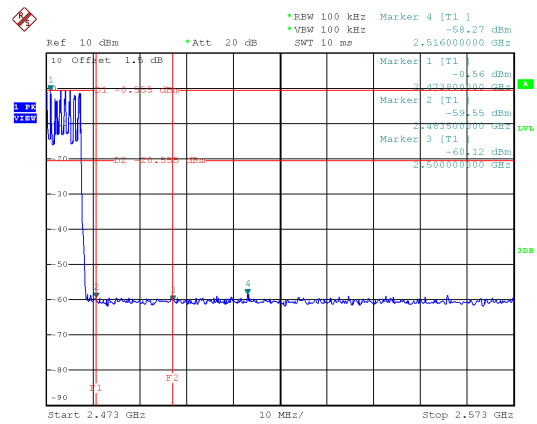


Date: 15.JAN.2020 15:47:00

Date: 15.JAN.2020 15:46:26


## CH00 – 10th Harmonic of the fundamental frequency

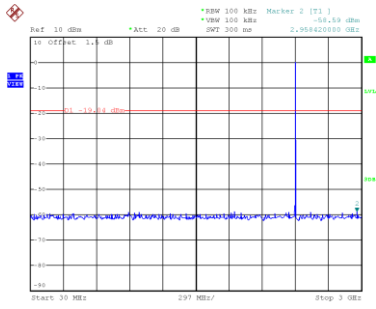

Date: 6.JAN.2020 10:12:20

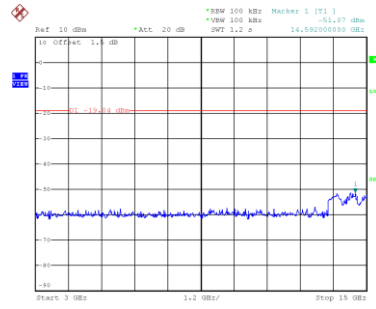


Date: 6.JAN.2020 10:12:27

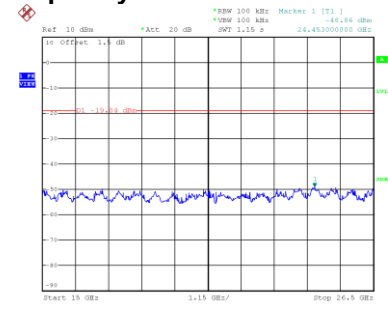


Date: 6.JAN.2020 10:12:34


## CH39 – 10th Harmonic of the fundamental frequency

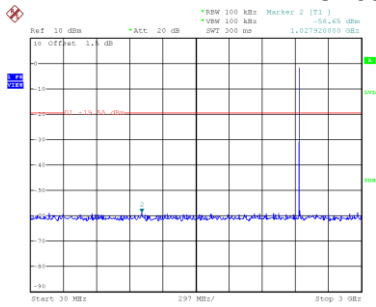

Date: 6.JAN.2020 10:13:50

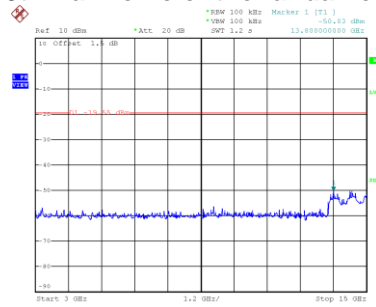


Date: 6.JAN.2020 10:13:57

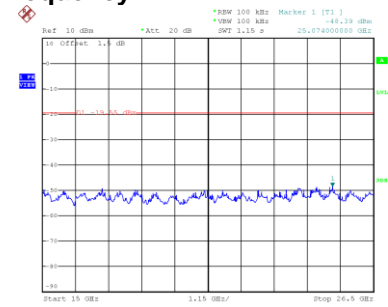


Date: 6.JAN.2020 10:13:04


## CH78 – 10th Harmonic of the fundamental frequency

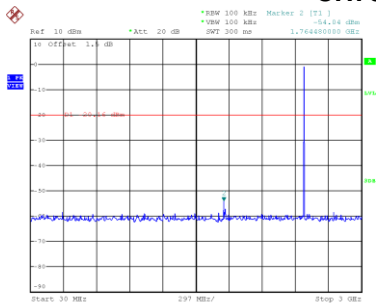

Date: 6.JAN.2020 10:13:28

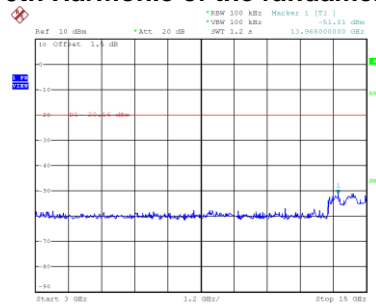


Date: 6.JAN.2020 10:13:35

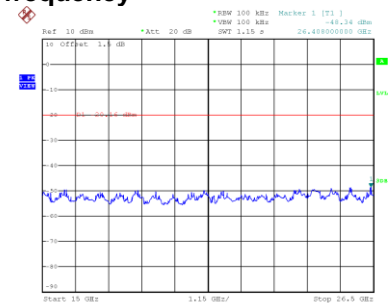


Date: 6.JAN.2020 10:13:42

## Test Mode : TX Mode \_3Mbps

### Bandedge CH00 (Lower)

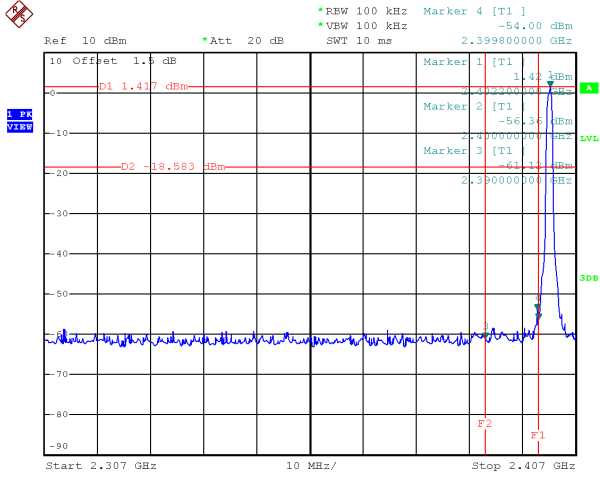


### Bandedge CH78 (Upper)

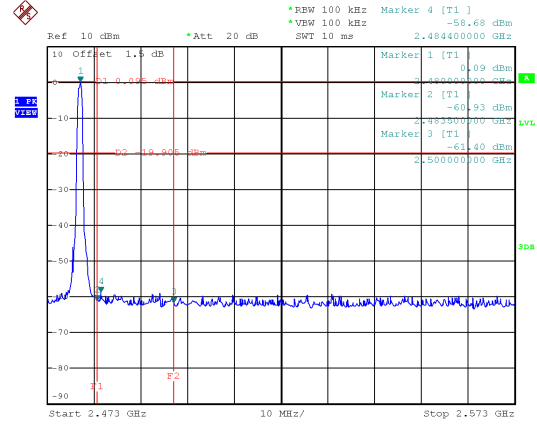


Date: 6.JAN.2020 11:00:18

Date: 6.JAN.2020 10:45:16

### Hopping on mode (Lower)

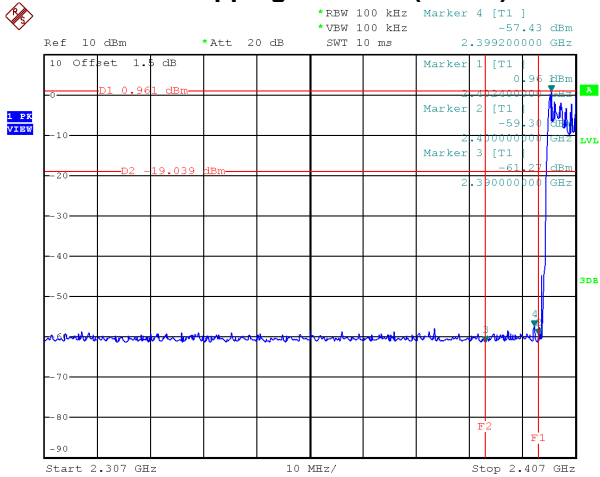


### Hopping on mode (Upper)

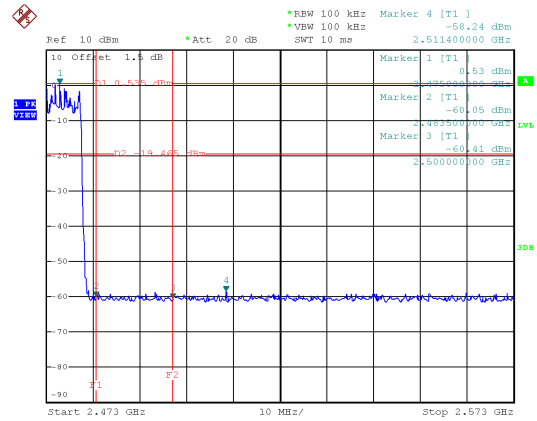


Date: 15.JAN.2020 16:00:02

Date: 15.JAN.2020 15:59:29


### CH00 – 10th Harmonic of the fundamental frequency

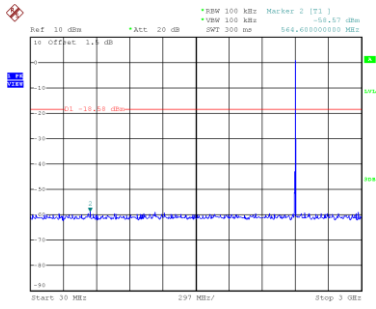

Date: 6.JAN.2020 10:45:52

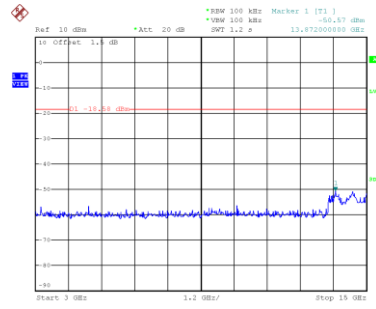


Date: 6.JAN.2020 10:45:59

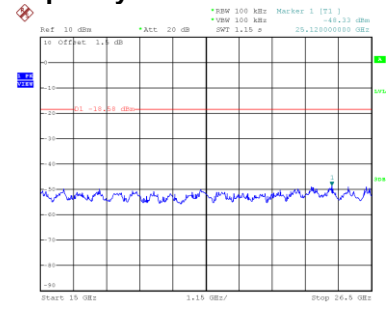


Date: 6.JAN.2020 10:46:06


### CH39 – 10th Harmonic of the fundamental frequency

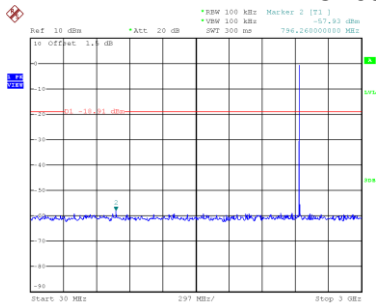

Date: 6.JAN.2020 10:58:31

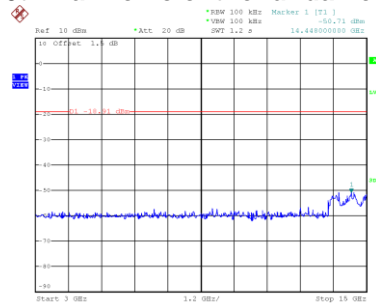


Date: 6.JAN.2020 10:58:38

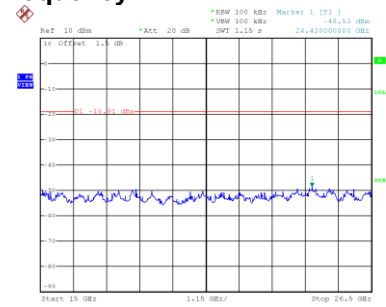


Date: 6.JAN.2020 10:58:45


### CH78 – 10th Harmonic of the fundamental frequency

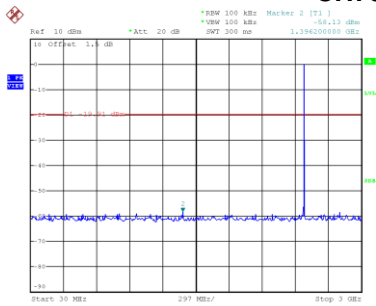

Date: 6.JAN.2020 11:00:55

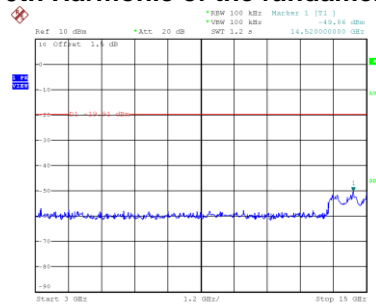

Date: 6.JAN.2020 11:01:02

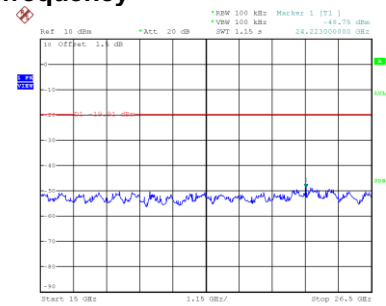

Date: 6.JAN.2020 11:01:09