

# FCC PART 22, 24 TYPE APPROVALS EMI MEASUREMENT AND TEST REPORT

For

## ZTE CORPORATION

ZTE Plaza, Hi-tech Park, Nanshan District, Shenzhen, Guangdong, China

**FCC ID: Q78-A12**

|                                                                                     |                                                                                                                                                 |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>This Report Concerns:</b><br><input checked="" type="checkbox"/> Original Report | <b>Equipment Type:</b><br>GSM Dual-band Digital Mobile Phone                                                                                    |
|   |                                                                                                                                                 |
| <b>Test Engineer:</b>                                                               | Daniel Deng /                                                                                                                                   |
| <b>Report No.:</b>                                                                  | R0506145                                                                                                                                        |
| <b>Report Date:</b>                                                                 | 2005-06-20                                                                                                                                      |
| <b>Reviewed By:</b>                                                                 | <br>Richard Lee /                                            |
| <b>Prepared By:</b>                                                                 | Bay Area Compliance Laboratory Corporation (BACL)<br>230 Commercial Street<br>Sunnyvale, CA 94085<br>Tel: (408) 732-9162<br>Fax: (408) 732 9164 |

**Note:** This test report is specially limited to the above client company and this particular sample only. It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the U.S. Government.

**TABLE OF CONTENTS**

|                                                                                           |           |
|-------------------------------------------------------------------------------------------|-----------|
| <b>GENERAL INFORMATION .....</b>                                                          | <b>4</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....                                  | 4         |
| OBJECTIVE .....                                                                           | 4         |
| RELATED SUBMITTAL(S)/GRANT(S) .....                                                       | 4         |
| TEST METHODOLOGY .....                                                                    | 4         |
| TEST FACILITY .....                                                                       | 4         |
| <b>SYSTEM TEST CONFIGURATION.....</b>                                                     | <b>6</b>  |
| JUSTIFICATION .....                                                                       | 6         |
| BLOCK DIAGRAM .....                                                                       | 6         |
| EQUIPMENT MODIFICATIONS.....                                                              | 6         |
| REMOTE SUPPORT EQUIPMENT LIST AND DETAILS.....                                            | 6         |
| <b>SUMMARY OF TEST RESULTS .....</b>                                                      | <b>7</b>  |
| <b>§2.1047 - MODULATION CHARACTERISTIC .....</b>                                          | <b>8</b>  |
| APPLICABLE STANDARD.....                                                                  | 8         |
| TEST PROCEDURE .....                                                                      | 8         |
| TEST EQUIPMENT LIST AND DETAILS.....                                                      | 8         |
| ENVIRONMENTAL CONDITIONS.....                                                             | 8         |
| TEST RESULTS.....                                                                         | 8         |
| <b>§2.1053 - SPURIOUS RADIATED EMISSIONS .....</b>                                        | <b>13</b> |
| APPLICABLE STANDARD.....                                                                  | 13        |
| TEST PROCEDURE.....                                                                       | 13        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                      | 13        |
| ENVIRONMENTAL CONDITIONS.....                                                             | 14        |
| TEST RESULT .....                                                                         | 14        |
| <b>§2.1046, §22.912(D), &amp; §24.232 - RF POWER OUTPUT .....</b>                         | <b>16</b> |
| APPLICABLE STANDARD.....                                                                  | 16        |
| TEST PROCEDURE .....                                                                      | 16        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                      | 17        |
| ENVIRONMENTAL CONDITIONS.....                                                             | 17        |
| TEST RESULTS.....                                                                         | 17        |
| <b>§2.1046, §22.913(A), &amp; §24.232 – CONDUCTED OUTPUT POWER .....</b>                  | <b>19</b> |
| APPLICABLE STANDARD.....                                                                  | 19        |
| TEST PROCEDURE.....                                                                       | 19        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                      | 19        |
| ENVIRONMENTAL CONDITIONS.....                                                             | 19        |
| TEST RESULTS.....                                                                         | 19        |
| <b>§2.1049, §22.917, §22.905, &amp; §24.238 - OCCUPIED BANDWIDTH .....</b>                | <b>24</b> |
| APPLICABLE STANDARD.....                                                                  | 24        |
| TEST PROCEDURE .....                                                                      | 24        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                      | 24        |
| ENVIRONMENTAL CONDITIONS.....                                                             | 24        |
| TEST RESULTS.....                                                                         | 24        |
| <b>§2.1051, §22.917, &amp; §24.238(A) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS .....</b> | <b>29</b> |
| APPLICABLE STANDARD.....                                                                  | 29        |
| TEST PROCEDURE.....                                                                       | 29        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                      | 29        |
| ENVIRONMENTAL CONDITIONS.....                                                             | 29        |
| TEST RESULTS.....                                                                         | 29        |
| <b>§2.1055 (A), §2.1055 (D), §22.355, &amp; §24.235 - FREQUENCY STABILITY.....</b>        | <b>36</b> |
| APPLICABLE STANDARD.....                                                                  | 36        |
| TEST PROCEDURE .....                                                                      | 36        |

---

|                                               |           |
|-----------------------------------------------|-----------|
| TEST EQUIPMENT LIST AND DETAILS.....          | 37        |
| ENVIRONMENTAL CONDITIONS.....                 | 37        |
| TEST RESULTS.....                             | 37        |
| <b>§22.917 &amp; §24.238 – BAND EDGE.....</b> | <b>39</b> |
| APPLICABLE STANDARD.....                      | 39        |
| TEST PROCEDURE.....                           | 39        |
| TEST EQUIPMENT LIST AND DETAILS.....          | 39        |
| ENVIRONMENTAL CONDITIONS.....                 | 39        |
| TEST RESULTS.....                             | 39        |

---

## GENERAL INFORMATION

---

### Product Description for Equipment Under Test (EUT)

The *ZTE CORPORATION* product, FCC ID:Q78-A12 or the "EUT" as referred to in this report is a GSM850 & PCS1900 Cell Phone, which measures approximately 106mmL x 44.5mmW x 16.8mmH.

*\* The test data gathered are from typical production sample, serial number: 710621000000238, provided by the manufacturer.*

### Objective

This type approval report is prepared on behalf of *ZTE CORPORATION* in accordance with Part 2, Subpart J, Part 15, Subparts A and B, Part 22 Subpart H, and Part 24 Subpart E of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC rules for output power, modulation characteristic, occupied bandwidth, spurious emission at antenna terminal, field strength of spurious radiation, frequency stability, and conducted and radiated margin.

### Related Submittal(s)/Grant(s)

No Related Submittals

### Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 15 Subpart B – Unintentional Radiators  
Part 22 Subpart H - Public Mobile Services  
Part 24 Subpart E - PCS

Applicable Standards: TIA EIA 137-A, TIA EIA 98-C, TIA603-B, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### Test Facility

The Open Area Test site used by BACL Corp. to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California, USA.

Test site at BACL Corp. has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the test methods and procedures set forth in ANSI C63.4-2003& TIA/EIA-603.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200167-0). The current scope of accreditations is attached hereinafter and can also be found at <http://ts.nist.gov/ts/htdocs/210/214/scopes/2001670.htm>

---

## SYSTEM TEST CONFIGURATION

---

### Justification

The EUT was configured for testing according to TIA/EIA-603.

The final qualification test was performed with the EUT operating at normal mode.

### Block Diagram

Please refer to Exhibit D.

### Equipment Modifications

No modifications were made to the EUT.

### Remote Support Equipment List and Details

| Manufacturer | Description                     | Model  | Serial Number | FCC ID |
|--------------|---------------------------------|--------|---------------|--------|
| R & S        | Wireless Communication Test Set | CMU200 | 103492        | /      |

## SUMMARY OF TEST RESULTS

| FCC RULE                                             | DESCRIPTION OF TEST                                                    | RESULT    |
|------------------------------------------------------|------------------------------------------------------------------------|-----------|
| § 2.1047                                             | Modulation Characteristics                                             | Compliant |
| § 2.1053                                             | Field Strength of Spurious Radiation                                   | Compliant |
| § 2.1093                                             | RF Exposure                                                            | N/A       |
| § 15.107                                             | Conducted Emissions                                                    | Compliant |
| § 2.1046,<br>§ 22.912 (d)<br>§ 24.232                | RF Output Power                                                        | Compliant |
| § 2.1046,<br>§ 22.913 (a)<br>§ 24.232                | Conducted Output Power                                                 | N/A       |
| § 2.1049<br>§ 22.917<br>§ 22.905<br>§ 24.238         | Out of Band Emission, Occupied Bandwidth                               | Compliant |
| § 2.1051,<br>§ 22.917<br>§ 24.238(a)                 | Spurious Emissions at Antenna Terminals                                | Compliant |
| § 2.1055 (a)<br>§ 2.1055 (d)<br>§ 22.355<br>§ 24.235 | Frequency stability vs. temperature<br>Frequency stability vs. voltage | Compliant |
| § 22.917<br>§ 24.238                                 | Band Edge                                                              | Compliant |

## §2.1047 - MODULATION CHARACTERISTIC

### Applicable Standard

Requirement: FCC § 2.1047.

### Test Procedure

GSM digital mode is used by EUT.

### Test Equipment List and Details

| Manufacturer    | Description                       | Model  | Serial Number | Cal. Date  |
|-----------------|-----------------------------------|--------|---------------|------------|
| Rohde & Schwarz | Communication, Radio<br>Universal | CMU200 | 103492        | 2005-05-24 |
| Agilent         | Analyzer, Spectrum                | E4446A | US44300386    | 2004-11-10 |

\* **Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

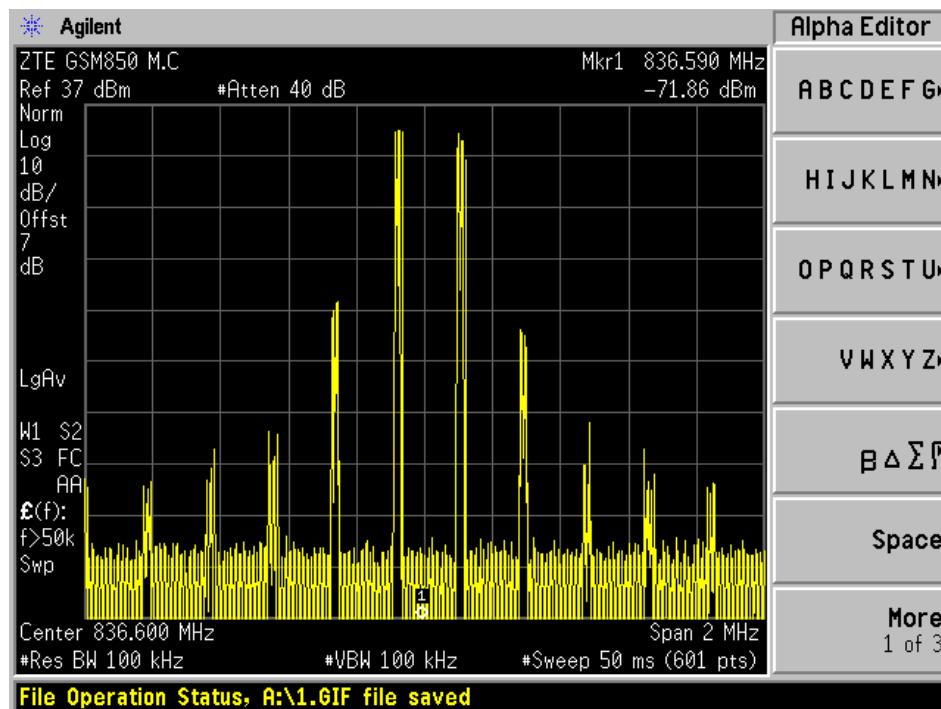
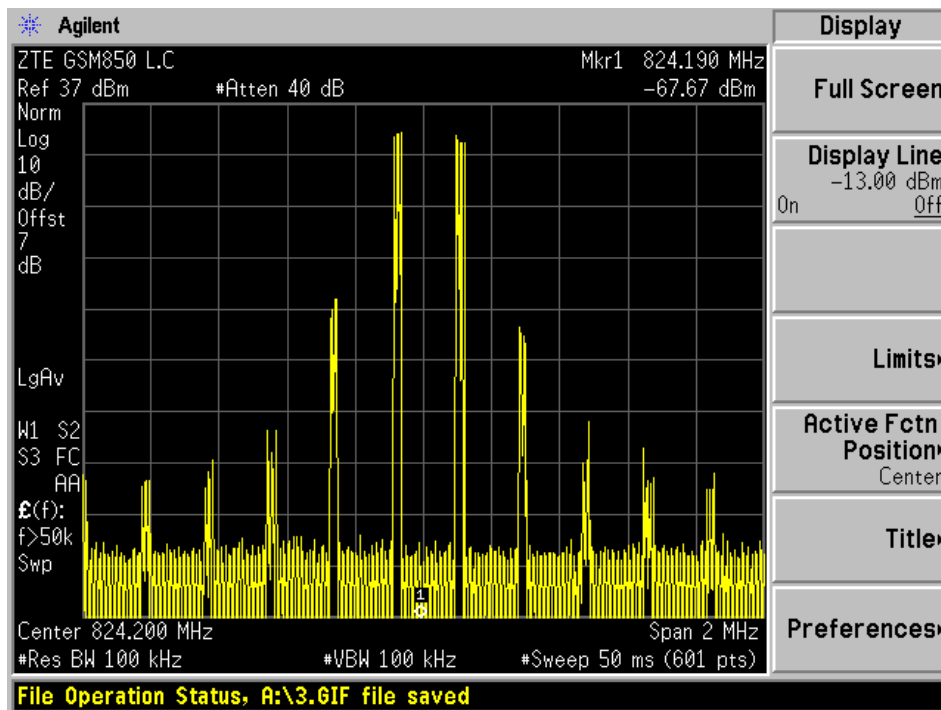
### Environmental Conditions


|                    |           |
|--------------------|-----------|
| Temperature:       | 22° C     |
| Relative Humidity: | 40%       |
| ATM Pressure:      | 1018 mbar |



*The testing was performed by Daniel Deng on 2005-06-16.*


### Test Results

Please refer to the hereinafter plots.

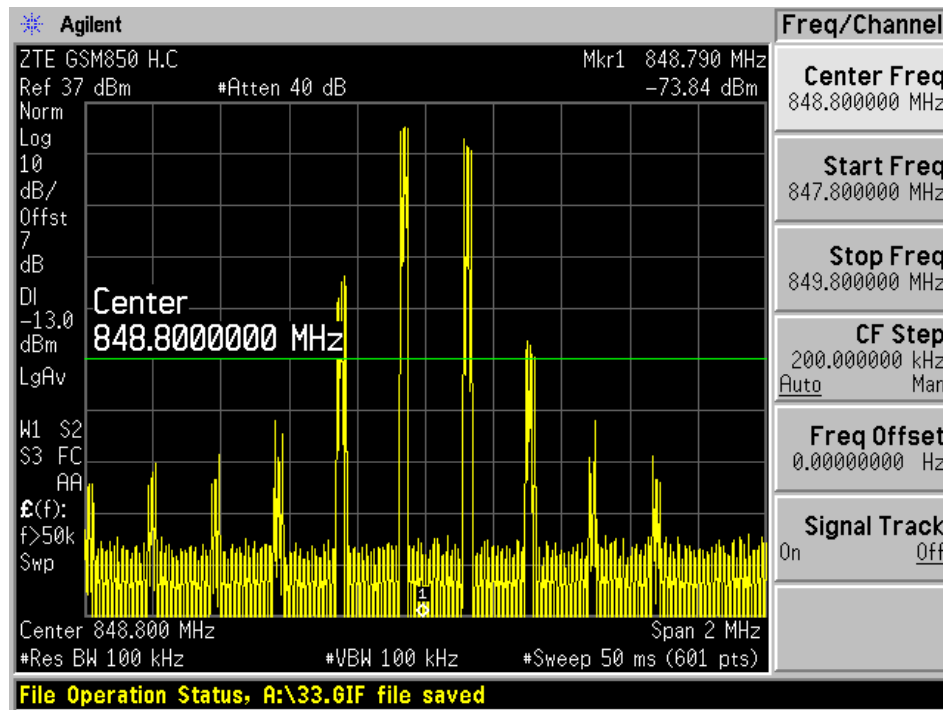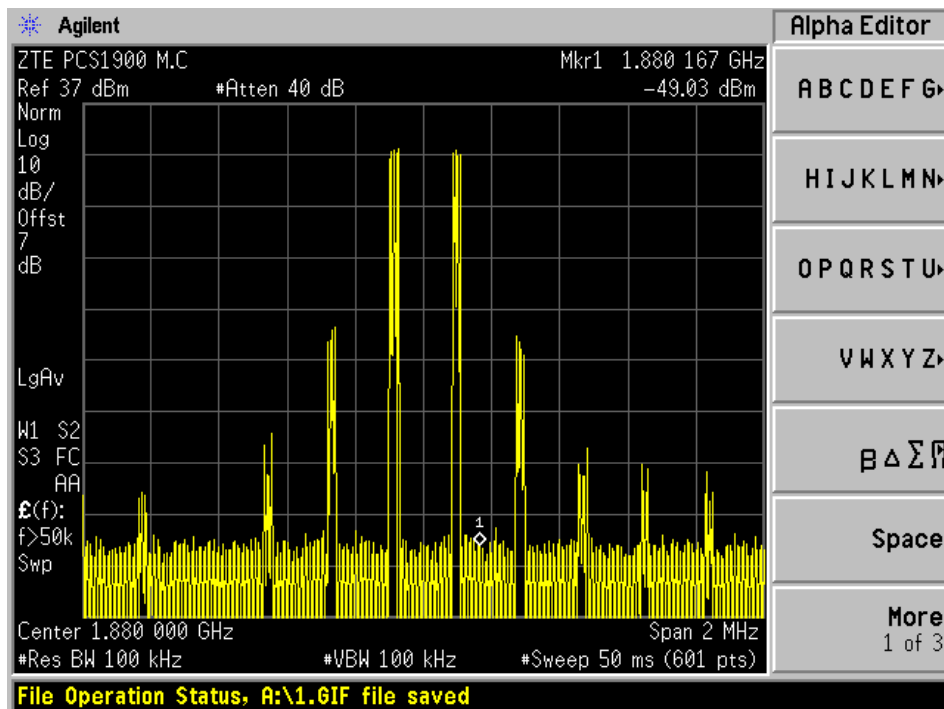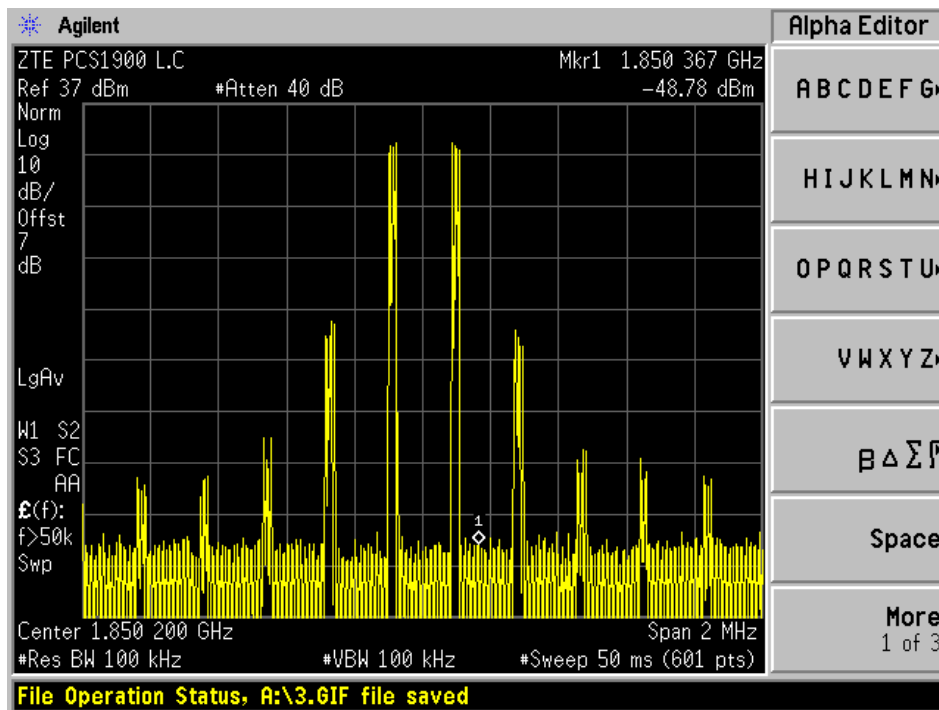*Plots of Modulation Characteristic for Part22*



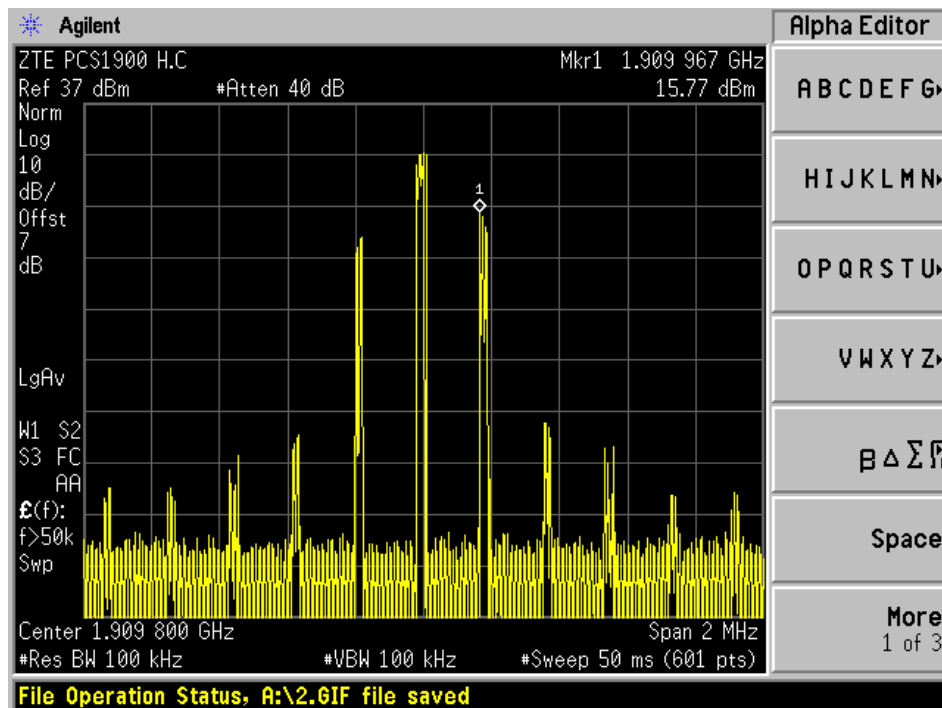*Plots of Modulation Characteristic for Part24*



## §2.1053 - SPURIOUS RADIATED EMISSIONS

### Applicable Standard

Requirements: CFR 47, § 2.1053.

### Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB =  $10 \lg(\text{TXpwr in Watts}/0.001)$  – the absolute level

Spurious attenuation limit in dB =  $43 + 10 \text{Log}_{10}(\text{power out in Watts})$

### Test Equipment List and Details

| Manufacturer    | Description                    | Model                          | Serial Number | Cal. Date  |
|-----------------|--------------------------------|--------------------------------|---------------|------------|
| Rohde & Schwarz | Communication, Radio Universal | CMU200                         | 103492        | 2005-05-24 |
| Agilent         | Analyzer, Spectrum             | E4446A                         | US44300386    | 2004-11-10 |
| ETS             | Antenna, Log-Periodic          | 3148                           | 4-1155        | 2004-12-14 |
| ETS             | Antenna, Biconical             | 3110B                          | 9603-2315     | 2004-12-14 |
| HP              | Amplifier, Pre                 | 8447D                          | 2944A10198    | 2004-08-20 |
| HP              | Amplifier, Pre, Microwave      | 8449B                          | 3147A00400    | 2005-06-14 |
| Rohde & Schwarz | Generator, Signal              | SMIQ03                         | 849192/0085   | 2005-05-02 |
| A. H. Systems   | Antenna, Horn, DRG             | SAS-200/571                    | 261           | 2005-04-20 |
| HP              | Generator, Signal              | 83650B                         | 3614A00276    | 2005-05-10 |
| A.R.A.          | Antenna, Horn                  | DRG-118/A                      | 1132          | 2003-09-30 |
| Wainwright      | Filter, Band Reject            | WRCG823/850-813/860-40/8SS     | 2             | 2004-08-11 |
| Wainwright      | Filter, Band Reject            | WRCG1850/1910-1835/1925-40/8SS | 5             | 2004-08-11 |

\* **Statement of Traceability: BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

**Environmental Conditions**

|                    |          |
|--------------------|----------|
| Temperature:       | 23° C    |
| Relative Humidity: | 40%      |
| ATM Pressure:      | 1021mbar |

\* The testing was performed by Daniel Deng on 2005-06-17.

**Test Result**

Worst case reading as follows:

GSM 850

-23.2 dB at 1673.2 MHz

GSM 1900

-26.3 dB at 3760 MHz

**Test Data for GSM850**

| EUT              |               |                 |                 |              | Substitution     |              | Generator         |            |              | Standard     |              |
|------------------|---------------|-----------------|-----------------|--------------|------------------|--------------|-------------------|------------|--------------|--------------|--------------|
| Indicated        |               | Table           | Test Antenna    |              |                  |              | Antenna           | Cable      | Absolute     | FCC          | FCC          |
| Frequency<br>MHz | Ampl.<br>dBuV | Angle<br>Degree | Height<br>Meter | Polar<br>H/V | Frequency<br>MHz | Level<br>dBm | Gain<br>Corrected | Loss<br>dB | Level<br>dBm | Limit<br>dBm | Margin<br>dB |
| 1673.2           | 35.34         | 0               | 1.3             | v            | 1673.2           | -44.2        | 9.3               | 1.3        | -36.2        | -13          | -23.2        |
| 2509.8           | 28.36         | 30              | 1.5             | v            | 2509.8           | -46.5        | 9.3               | 1.6        | -38.8        | -13          | -25.8        |
| 1673.2           | 30.43         | 0               | 1.5             | h            | 1673.2           | -49.5        | 9.3               | 1.3        | -41.5        | -13          | -28.5        |
| 2509.8           | 23.45         | 0               | 1.6             | h            | 2509.8           | -51.2        | 9.3               | 1.6        | -43.5        | -13          | -30.5        |
| 1014.0           | 20.19         | 30              | 1.4             | v            | 1014             | -58.9        | 6.9               | 0.9        | -52.9        | -13          | -39.9        |
| 1400.1           | 19.76         | 0               | 1.3             | v            | 1400.1           | -60.2        | 8.3               | 1.2        | -53.1        | -13          | -40.1        |
| 1014.0           | 18.51         | 300             | 1.7             | h            | 1014             | -59.8        | 6.9               | 0.9        | -53.8        | -13          | -40.8        |
| 1400.1           | 17.85         | 120             | 1.5             | h            | 1400.1           | -61.5        | 8.3               | 1.2        | -54.4        | -13          | -41.4        |

**Test Data for GSM1900**

| EUT              |               |                 |                 |              | Generator        |              |                   |            |              | Standard     |              |
|------------------|---------------|-----------------|-----------------|--------------|------------------|--------------|-------------------|------------|--------------|--------------|--------------|
| Indicated        |               | Table           | Test Antenna    |              | Substitution     |              | Antenna           | Cable      | Absolute     | FCC          | FCC          |
| Frequency<br>MHz | Ampl.<br>dBuV | Angle<br>Degree | Height<br>Meter | Polar<br>H/V | Frequency<br>MHz | Level<br>dBm | Gain<br>Corrected | Loss<br>dB | Level<br>dBm | Limit<br>dBm | Margin<br>dB |
| 3760             | 20.91         | 150             | 1.6             | h            | 3760             | -47.2        | 11.4              | 3.5        | -39.3        | -13          | -26.3        |
| 3760             | 19.31         | 30              | 1.7             | v            | 3760             | -48.6        | 11.4              | 3.5        | -40.7        | -13          | -27.7        |
| 5640             | 16.89         | 0               | 1.5             | h            | 5640             | -52          | 10.9              | 4.6        | -45.7        | -13          | -32.7        |
| 2567.26          | 21.5          | 180             | 1.6             | h            | 2567.26          | -53.6        | 9.3               | 1.6        | -45.9        | -13          | -32.9        |
| 5640             | 16.23         | 0               | 1.6             | v            | 5640             | -52.7        | 10.9              | 4.6        | -46.4        | -13          | -33.4        |
| 2567.26          | 19.68         | 270             | 1.5             | v            | 2567.26          | -55.3        | 9.3               | 1.6        | -47.6        | -13          | -34.6        |
| 1637.98          | 17.66         | 300             | 1.2             | v            | 1637.98          | -61.5        | 9.3               | 1.3        | -53.5        | -13          | -40.5        |
| 1637.98          | 17.29         | 300             | 1.4             | h            | 1637.98          | -61.8        | 9.3               | 1.3        | -53.8        | -13          | -40.8        |

---

## §2.1046, §22.912(d), & §24.232 - RF POWER OUTPUT

---

### Applicable Standard

According to FCC §2.1046 and §24.232 (1), mobile/portable stations are limited to 2 watts EIRP.  
According to FCC §22.912(d), the ERP of mobile transmitters must not exceed 7 watts.

### Test Procedure

1. On a test site, the EUT shall be placed at 1.5m height on a turn table, and in the position closest to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3m from EUT to correspond to the frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the quasi-peak detector is used for the measurement.
4. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test.
5. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
6. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
7. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
8. The maximum signal level detected by the measuring receiver shall be noted.
9. The transmitter shall be replaced by a Dipole (for frequency below 1GHz), or Horn (for frequency above 1GHz).
10. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
11. The substitution antenna shall be connected to a calibrated signal generator.
12. In necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
13. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
14. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, which is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
15. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
16. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.

17. The measure of the effective radiated power is the large of the two levels recorded, at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.

### Test Equipment List and Details

| Manufacturer    | Description                    | Model                          | Serial Number | Cal. Date  |
|-----------------|--------------------------------|--------------------------------|---------------|------------|
| Rohde & Schwarz | Communication, Radio Universal | CMU200                         | 103492        | 2005-05-24 |
| Agilent         | Analyzer, Spectrum             | E4446A                         | US44300386    | 2004-11-10 |
| ETS             | Antenna, Log-Periodic          | 3148                           | 4-1155        | 2004-12-14 |
| ETS             | Antenna, Biconical             | 3110B                          | 9603-2315     | 2004-12-14 |
| HP              | Amplifier, Pre                 | 8447D                          | 2944A10198    | 2004-08-20 |
| HP              | Amplifier, Pre, Microwave      | 8449B                          | 3147A00400    | 2005-06-14 |
| Rohde & Schwarz | Generator, Signal              | SMIQ03                         | 849192/0085   | 2005-05-02 |
| A. H. Systems   | Antenna, Horn, DRG             | SAS-200/571                    | 261           | 2005-04-20 |
| HP              | Generator, Signal              | 83650B                         | 3614A00276    | 2005-05-10 |
| A.R.A.          | Antenna, Horn                  | DRG-118/A                      | 1132          | 2003-09-30 |
| Wainwright      | Filter, Band Reject            | WRCG823/850-813/860-40/8SS     | 2             | 2004-08-11 |
| Wainwright      | Filter, Band Reject            | WRCG1850/1910-1835/1925-40/8SS | 5             | 2004-08-11 |

\* **Statement of Traceability: BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

### Environmental Conditions

|                    |          |
|--------------------|----------|
| Temperature:       | 23° C    |
| Relative Humidity: | 40%      |
| ATM Pressure:      | 1021mbar |

\* The testing was performed by Daniel Deng on 2005-06-17.

### Test Results

| Frequency |                      | Antenna    | Cable | Absolute |
|-----------|----------------------|------------|-------|----------|
| MHz       | Measured Power (dBm) | Gain       | Loss  | Level    |
|           |                      | Correction | dB    | dBm      |
| 824.4     | 27.15                | 5.2        | 0.7   | 31.7     |
| 836.6     | 27.36                | 5.2        | 0.7   | 31.9     |
| 848.8     | 27.28                | 5.2        | 0.7   | 31.8     |

| Frequency |                      | Antenna    | Cable | Absolute |
|-----------|----------------------|------------|-------|----------|
| Mhz       | Measured Power (dBm) | Gain       | Loss  | Level    |
|           |                      | Correction | dB    | dBm      |
| 1850.2    | 20.4                 | 9.2        | 1.3   | 28.3     |
| 1880      | 21.4                 | 8.3        | 1.3   | 28.4     |
| 1909.8    | 20.3                 | 8.3        | 1.3   | 27.3     |

Sample calculation:

Absolute level = substitution reading + antenna gain - cable loss

For example:

$$21.4 + 8.3 - 1.3 = 28.4$$

## §2.1046, §22.913(a), & §24.232 – CONDUCTED OUTPUT POWER

### Applicable Standard

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (a), in no case may the peak output power of a base station transmitter exceed 2 watt.

### Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

### Test Equipment List and Details

| Manufacturer  | Description                    | Model  | Serial Number | Cal. Date  |
|---------------|--------------------------------|--------|---------------|------------|
| Rohde&Schwarz | Communication, Radio Universal | CMU200 | 103492        | 2005-05-24 |
| Agilent       | Analyzer, Spectrum             | E4446A | US44300386    | 2004-11-10 |

\* **Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

### Environmental Conditions

|                    |          |
|--------------------|----------|
| Temperature:       | 22° C    |
| Relative Humidity: | 40%      |
| ATM Pressure:      | 1018mbar |

\* The testing was performed by Daniel Deng on 2005-06-16.



### Test Results


GSM850:



| Channel | Frequency (MHz) | Output Power in dBm | Output Power in W | Limit in W |
|---------|-----------------|---------------------|-------------------|------------|
| LOW     | 824.2           | 31.90               | 1.548             | 7          |
| MIDDLE  | 836.6           | 32.11               | 1.625             | 7          |
| HIGH    | 848.8           | 32.07               | 1.610             | 7          |


GSM1900:
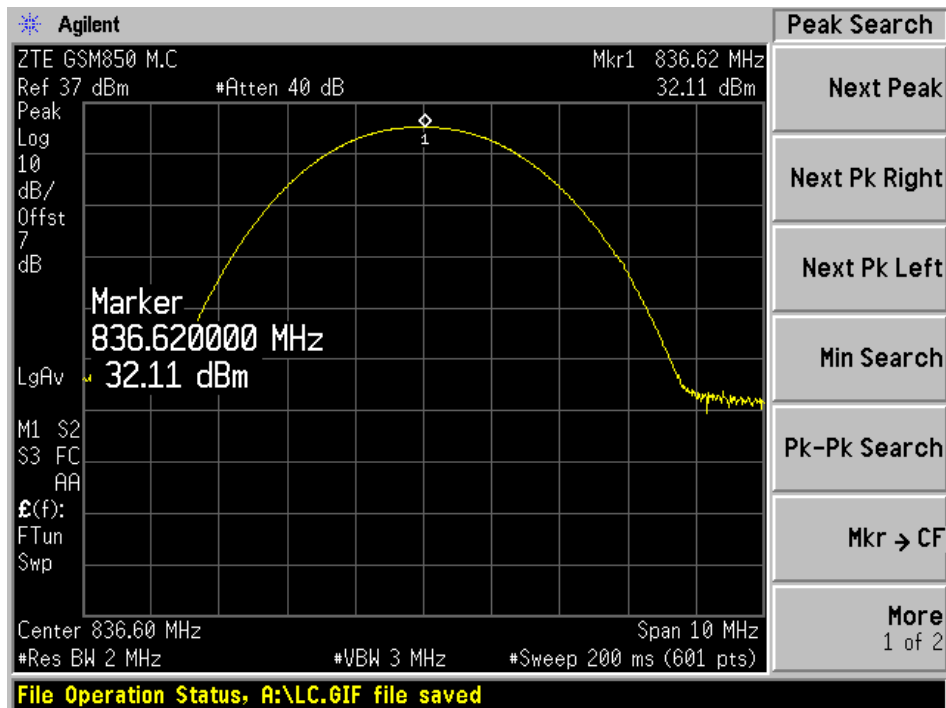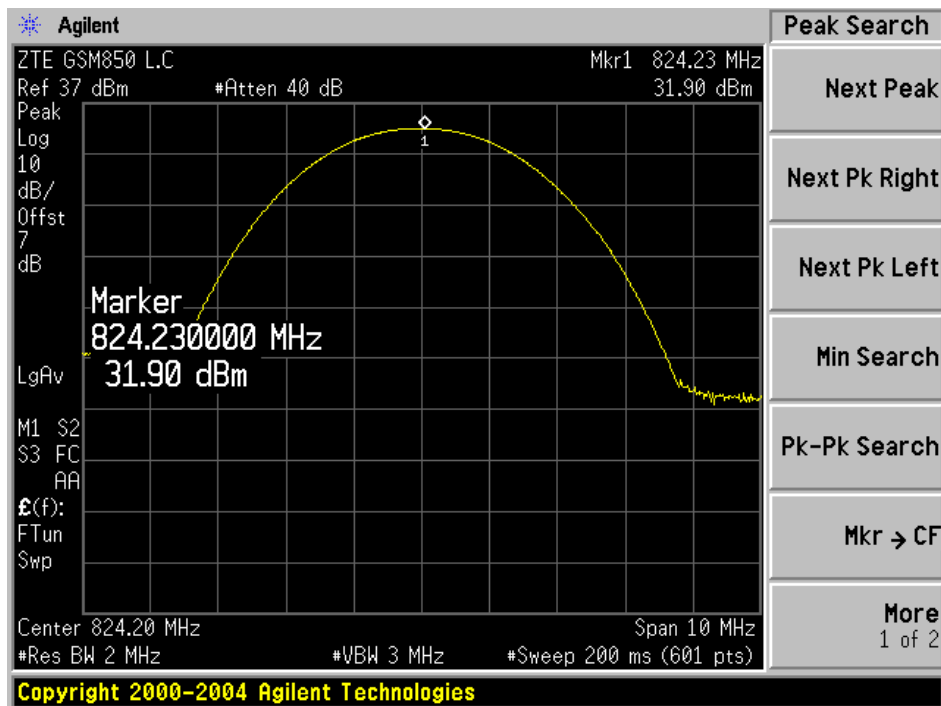
| Channel | Frequency (MHz) | Output Power in dBm | Output Power in W | Limit in W |
|---------|-----------------|---------------------|-------------------|------------|
| LOW     | 1850.2          | 28.12               | 0.649             | 2          |
| MIDDLE  | 1880.0          | 28.40               | 0.692             | 2          |
| HIGH    | 1909.8          | 27.57               | 0.571             | 2          |

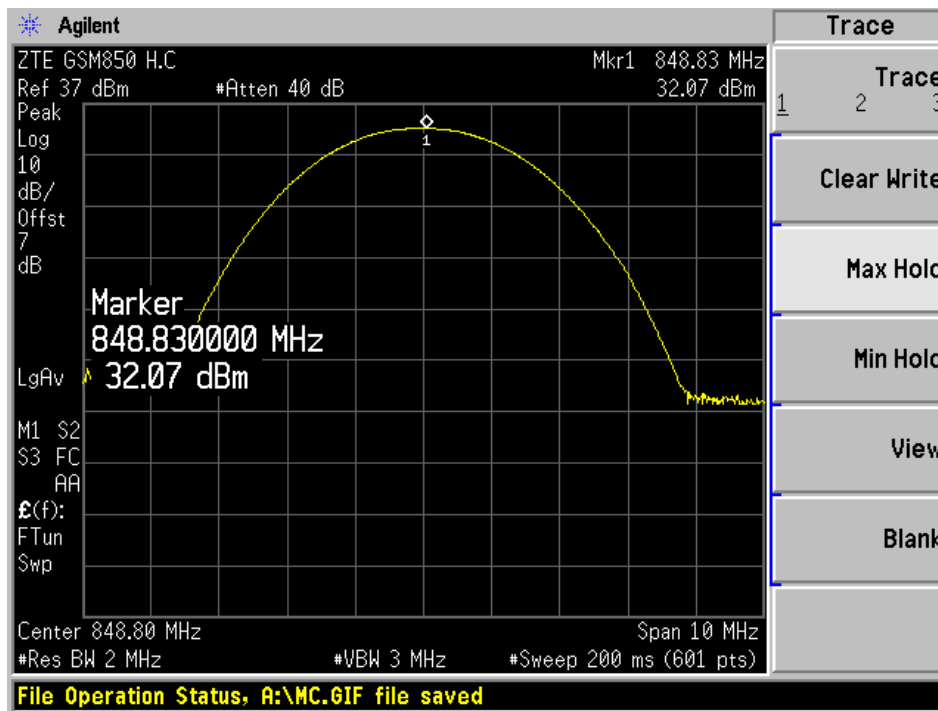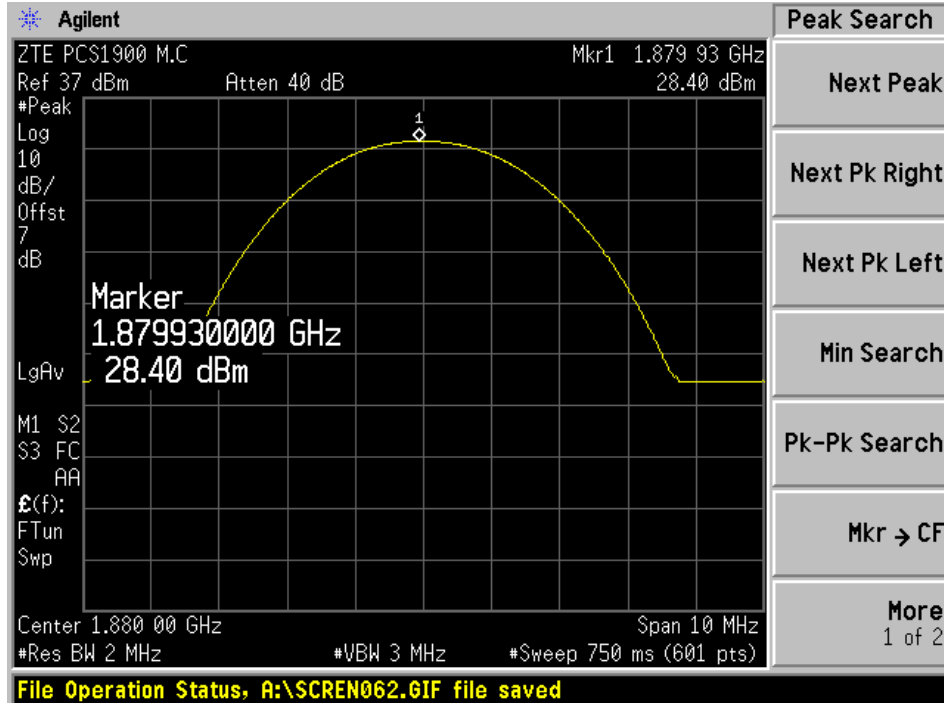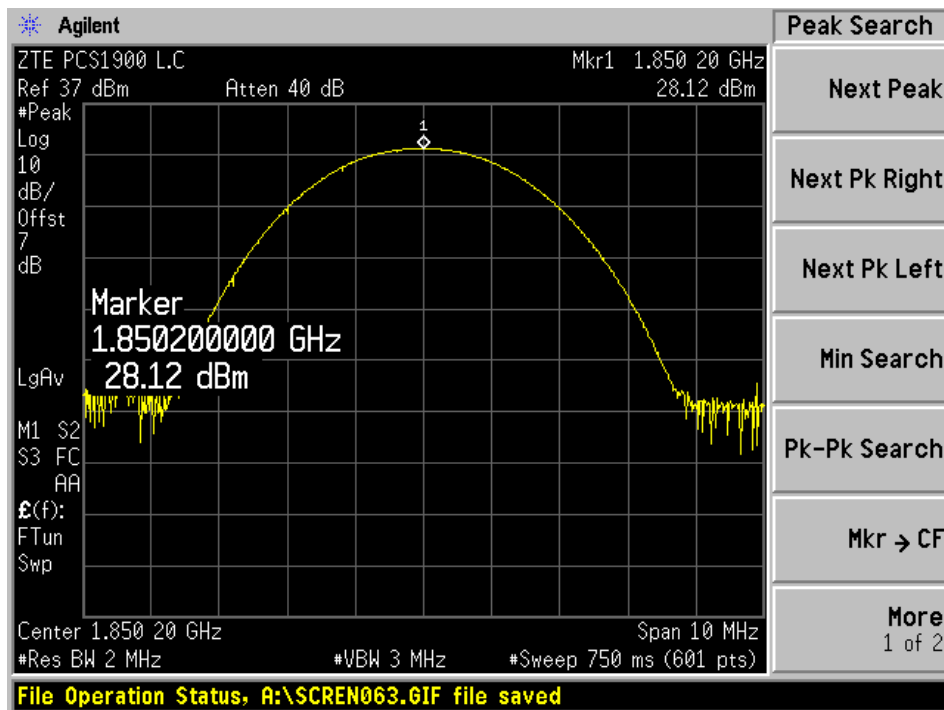*Plots of Conducted Output Power for Part 22*



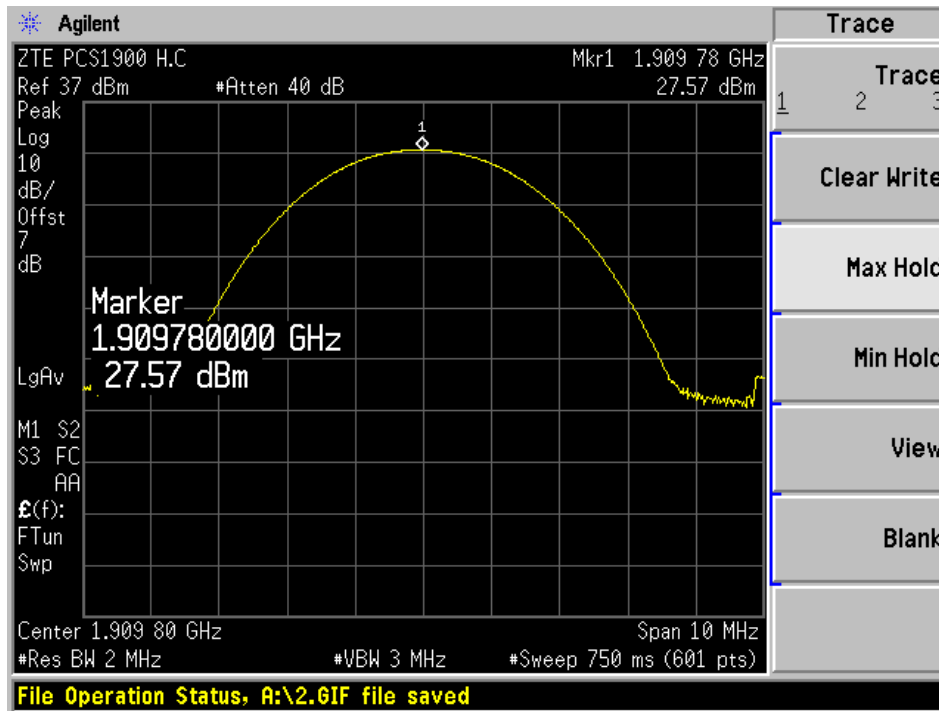*Plots of Conducted Output Power for Part24*



---

**§2.1049, §22.917, §22.905, & §24.238 - OCCUPIED BANDWIDTH**

---

**Applicable Standard**

Requirements: CFR 47, Section 2.1049, Section 22.901, Section 22.917 and Section 24.238.

**Test Procedure**

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 30 KHz and the 26 dB bandwidth was recorded.

**Test Equipment List and Details**

| Manufacturer  | Description                    | Model  | Serial Number | Cal. Date  |
|---------------|--------------------------------|--------|---------------|------------|
| Rohde&Schwarz | Communication, Radio Universal | CMU200 | 103492        | 2005-05-24 |
| Agilent       | Analyzer, Spectrum             | E4446A | US44300386    | 2004-11-10 |

\* **Statement of Traceability: BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

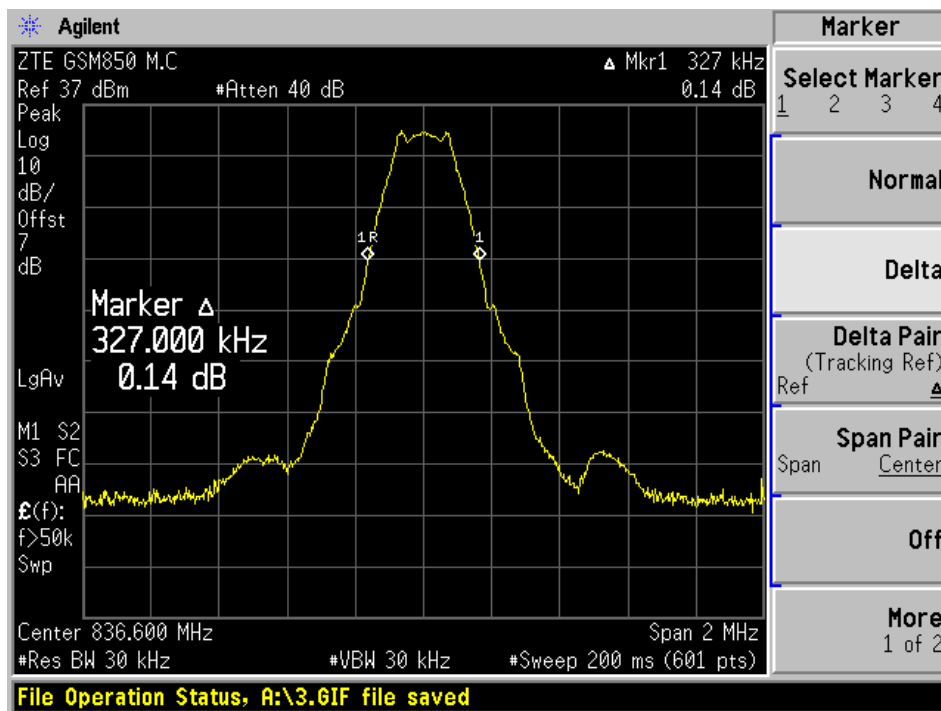
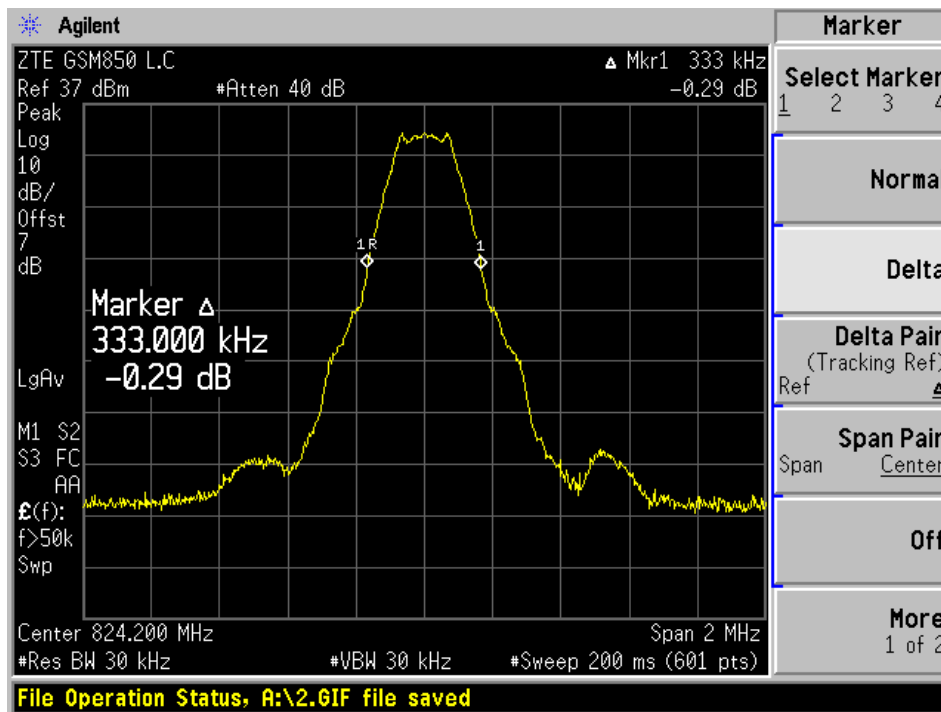
**Environmental Conditions**


|                    |           |
|--------------------|-----------|
| Temperature:       | 23° C     |
| Relative Humidity: | 40%       |
| ATM Pressure:      | 1021 mbar |



\* *The testing was performed by Daniel Deng on 2005-06-17.*


**Test Results**

Please refer to the following plots.

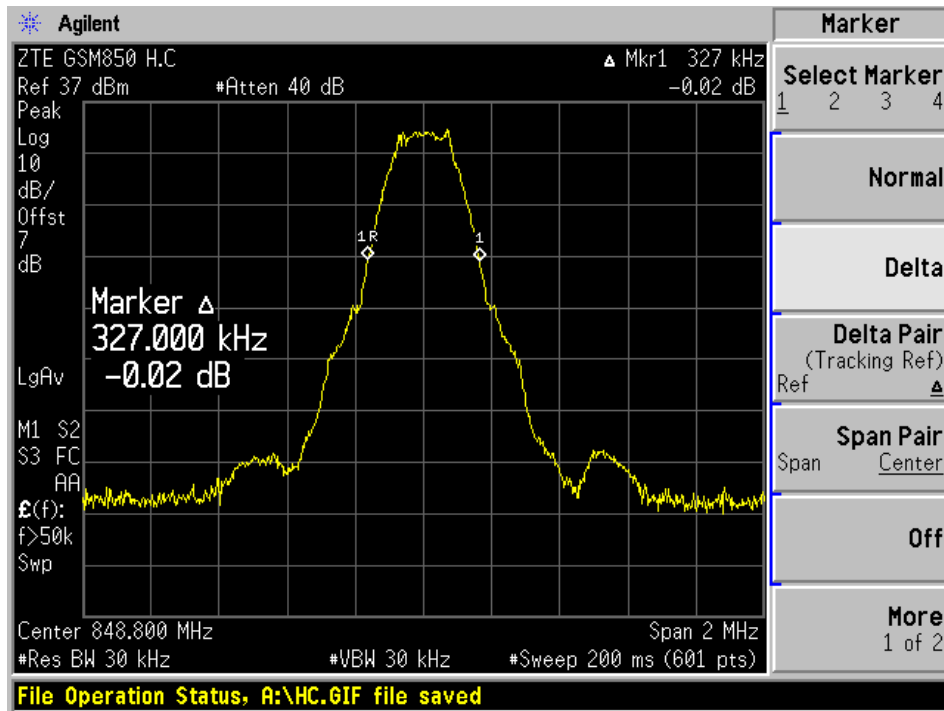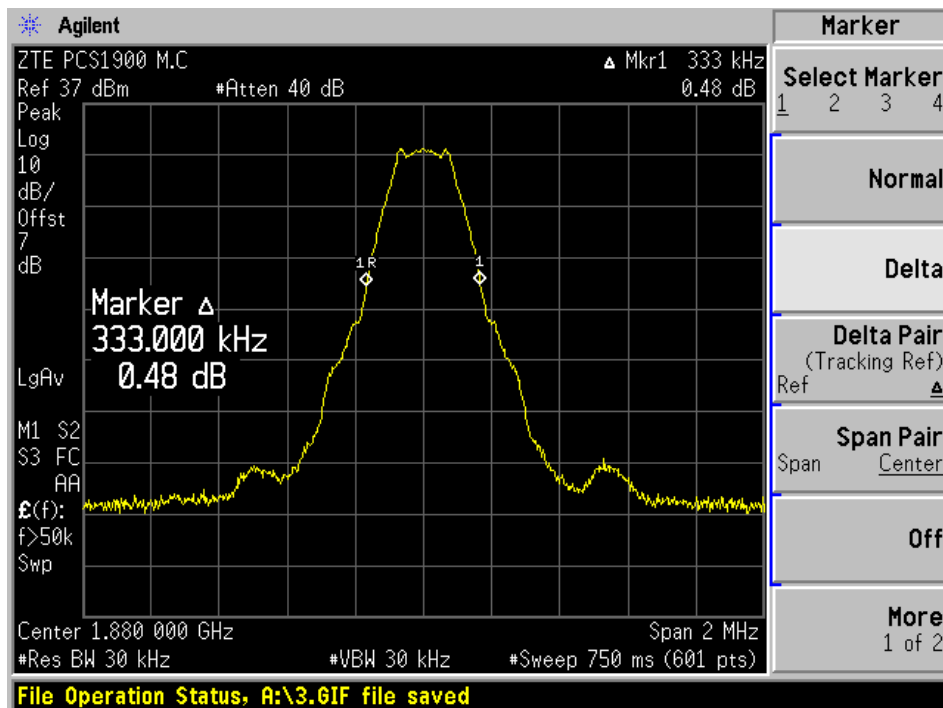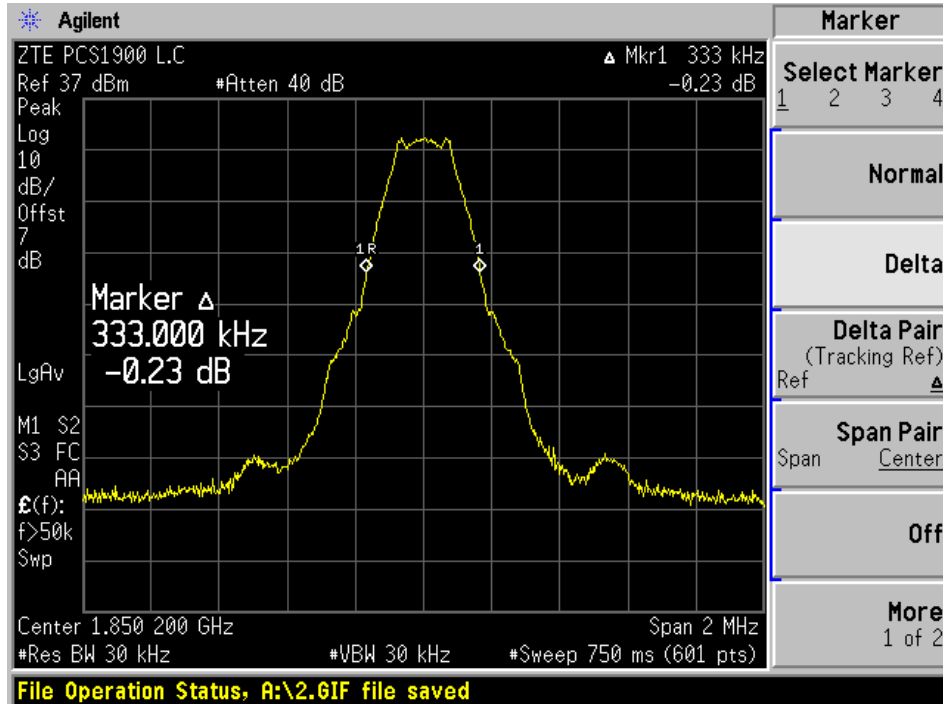*Plots of Occupied Bandwidth for Part22*



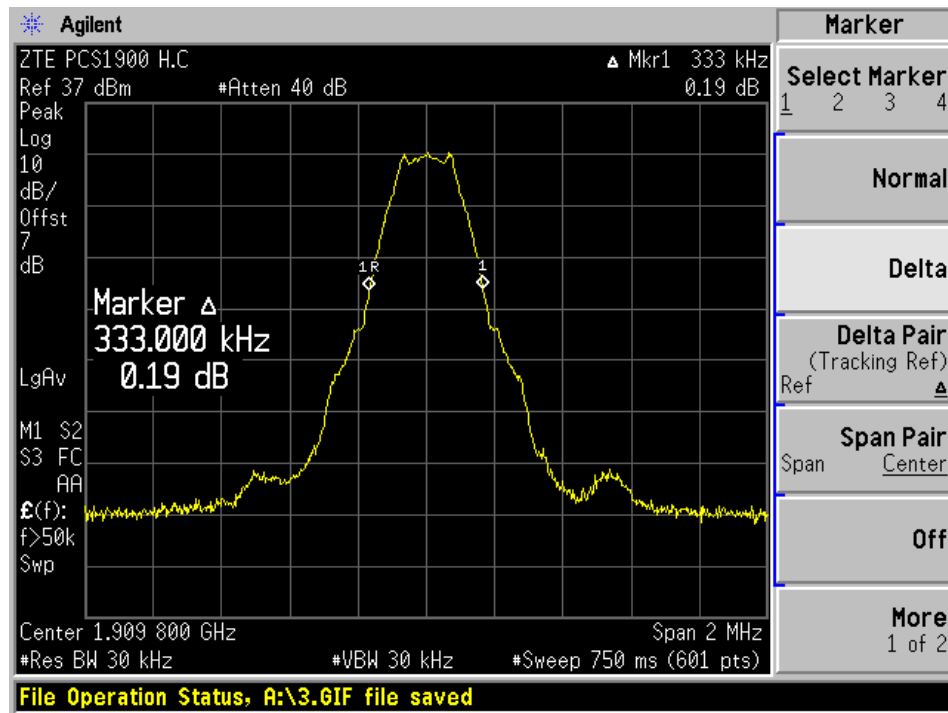*Plots of Occupied Bandwidth for Part24*



## §2.1051, §22.917, & §24.238(a) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

### Applicable Standard

Requirements: CFR 47, § 2.1051, § 22.917 & §24.238(a).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1057.

### Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10<sup>th</sup> harmonic.

### Test Equipment List and Details

| Manufacturer  | Description                    | Model  | Serial Number | Cal. Date  |
|---------------|--------------------------------|--------|---------------|------------|
| Rohde&Schwarz | Communication, Radio Universal | CMU200 | 103492        | 2005-05-24 |
| Agilent       | Analyzer, Spectrum             | E4446A | US44300386    | 2004-11-10 |

\* **Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

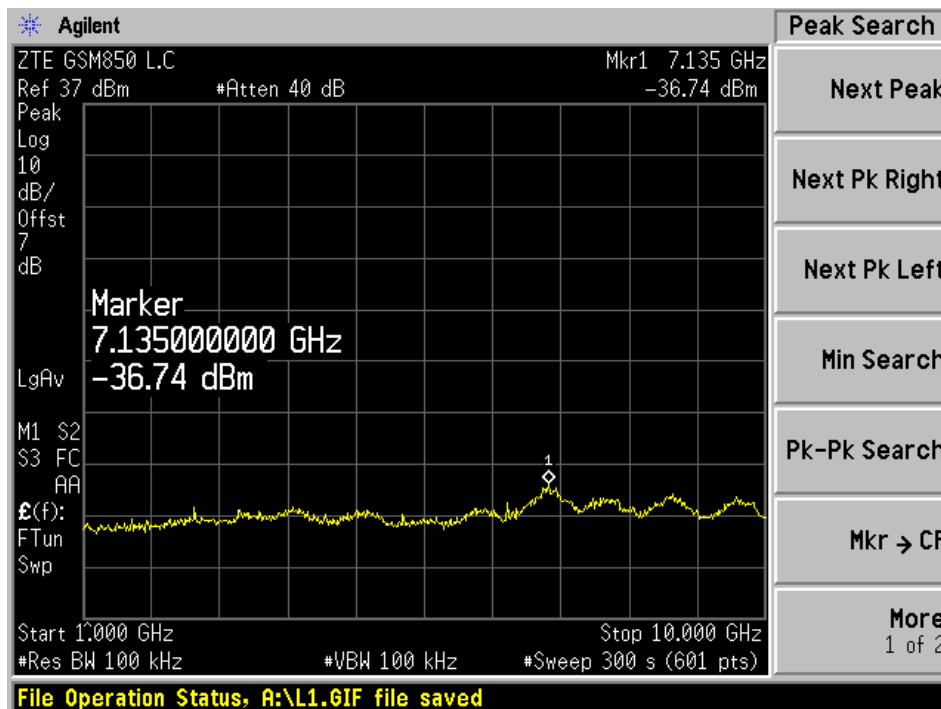
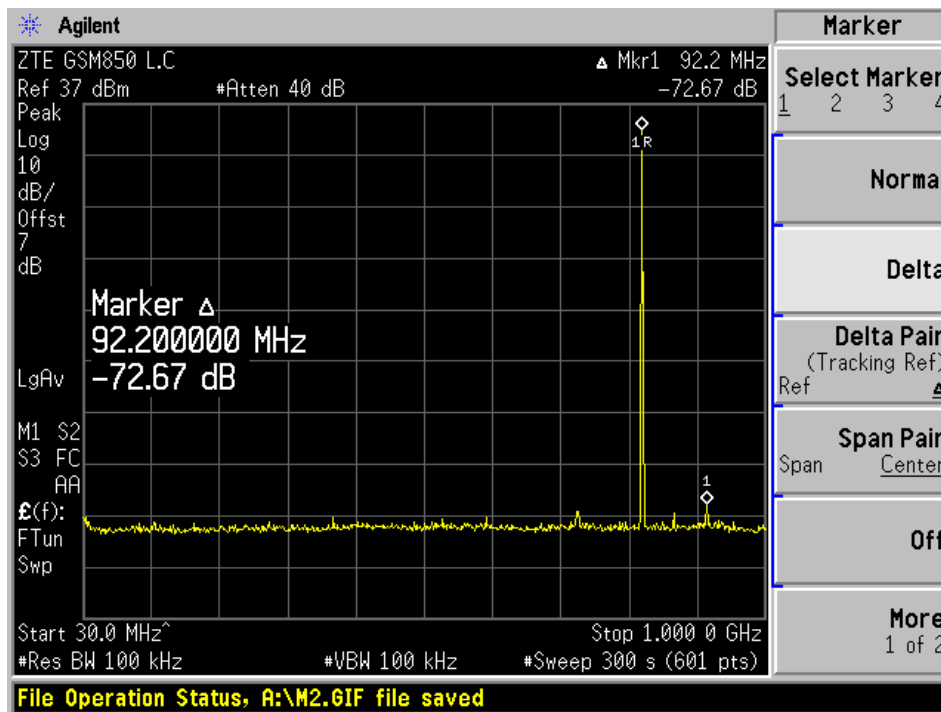
### Environmental Conditions



|                    |           |
|--------------------|-----------|
| Temperature:       | 22° C     |
| Relative Humidity: | 40%       |
| ATM Pressure:      | 1018 mbar |



\* The testing was performed by Daniel Deng on 2005-06-16.



### Test Results



Please refer to the hereinafter plots.



*Plots of Spurious Emission for Part22*

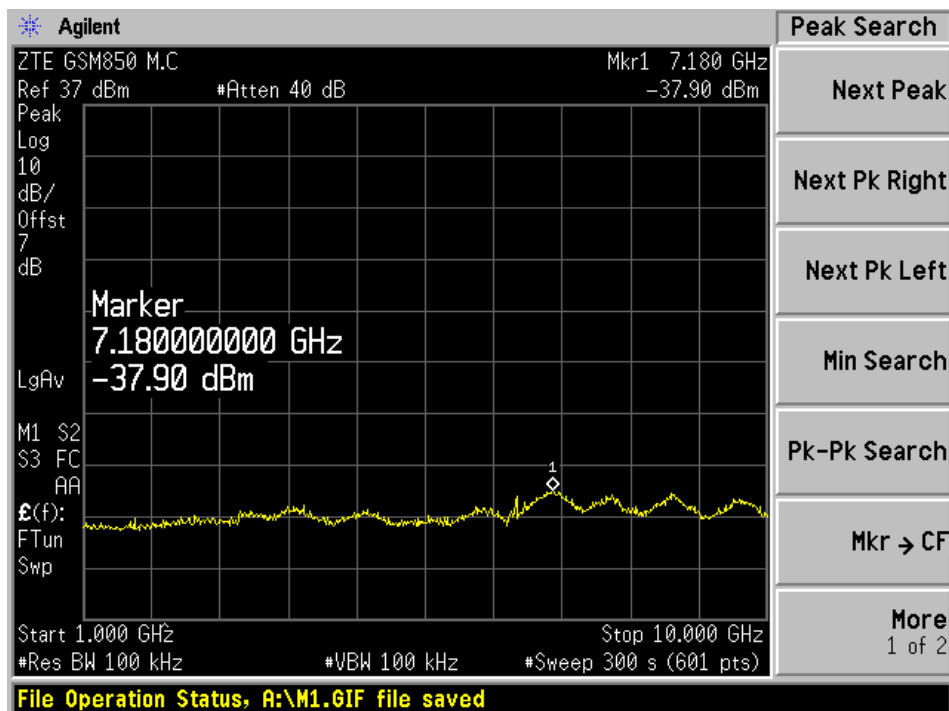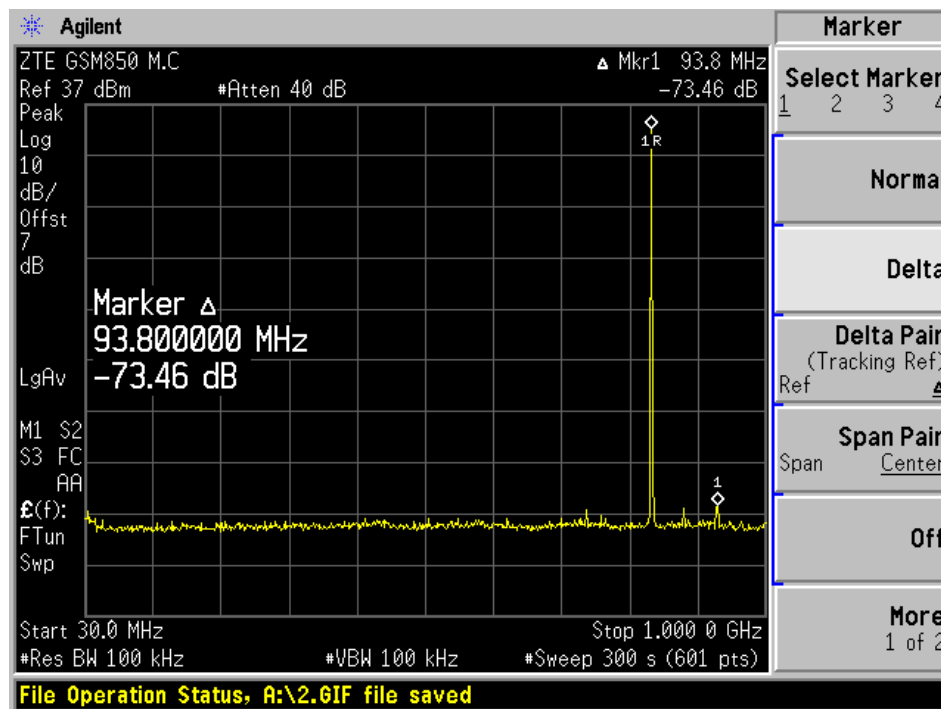

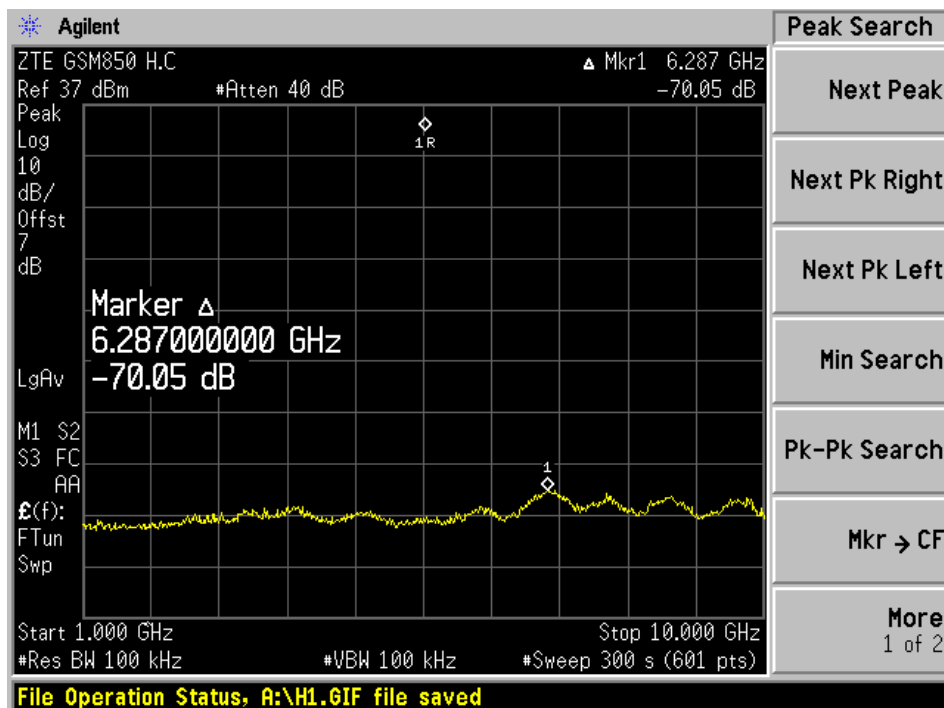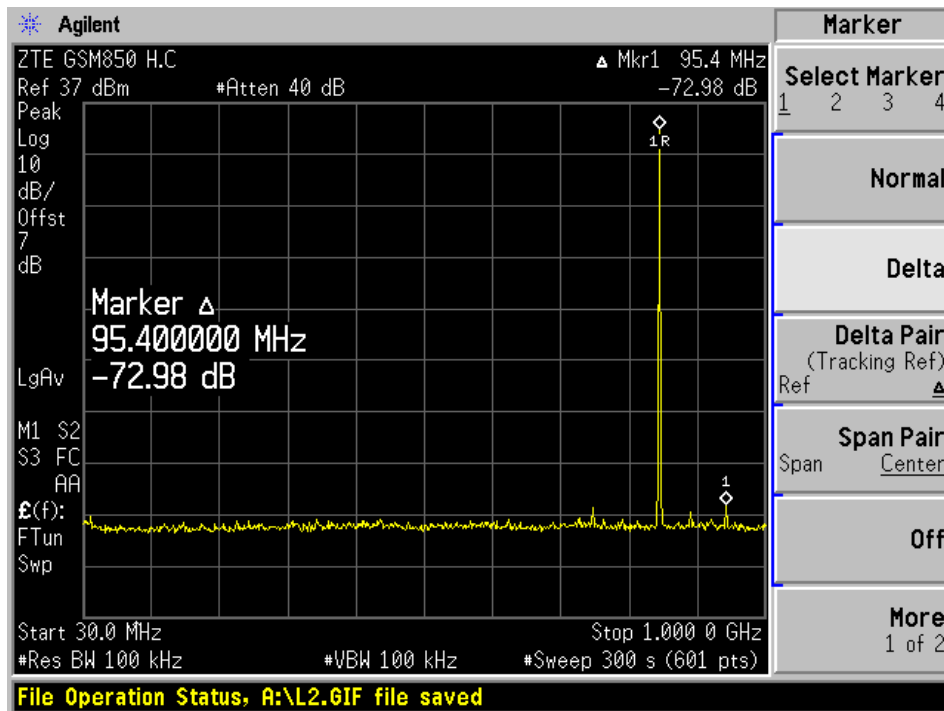

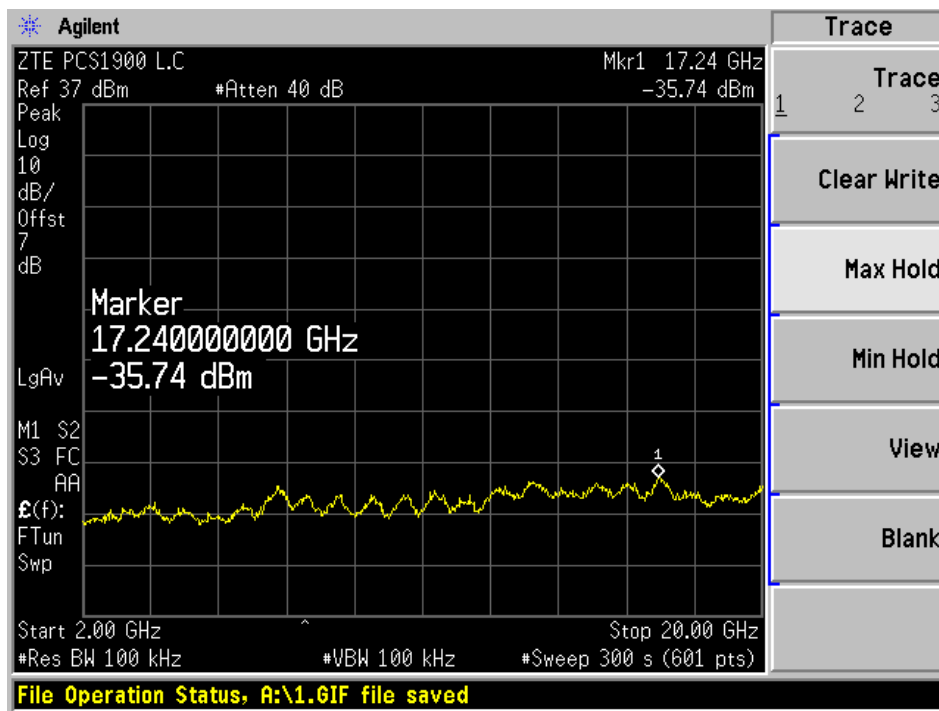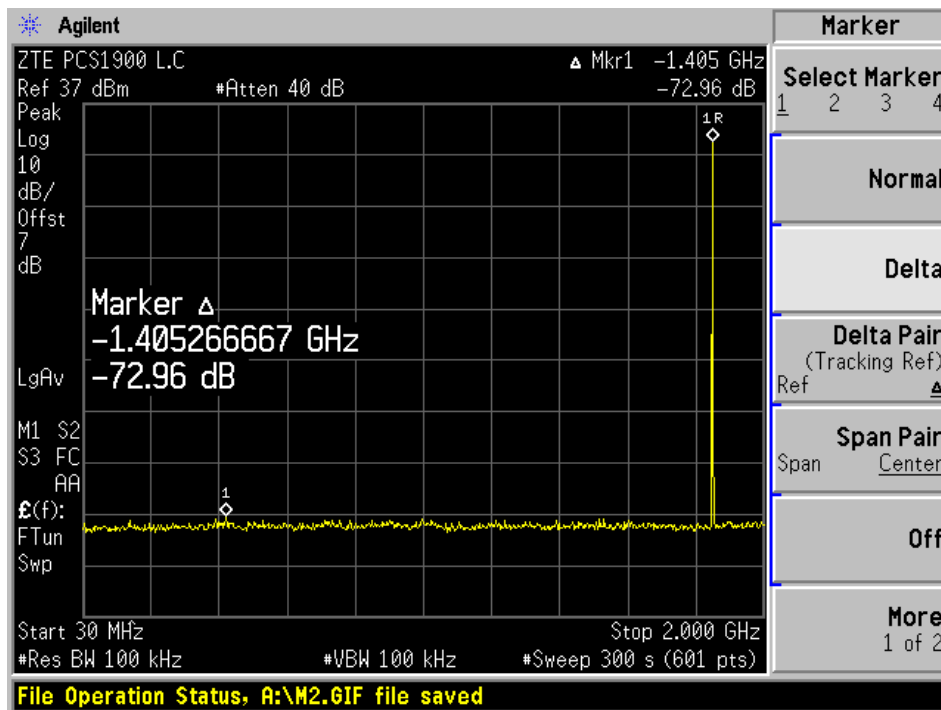*Plots of Spurious Emission for Part24*

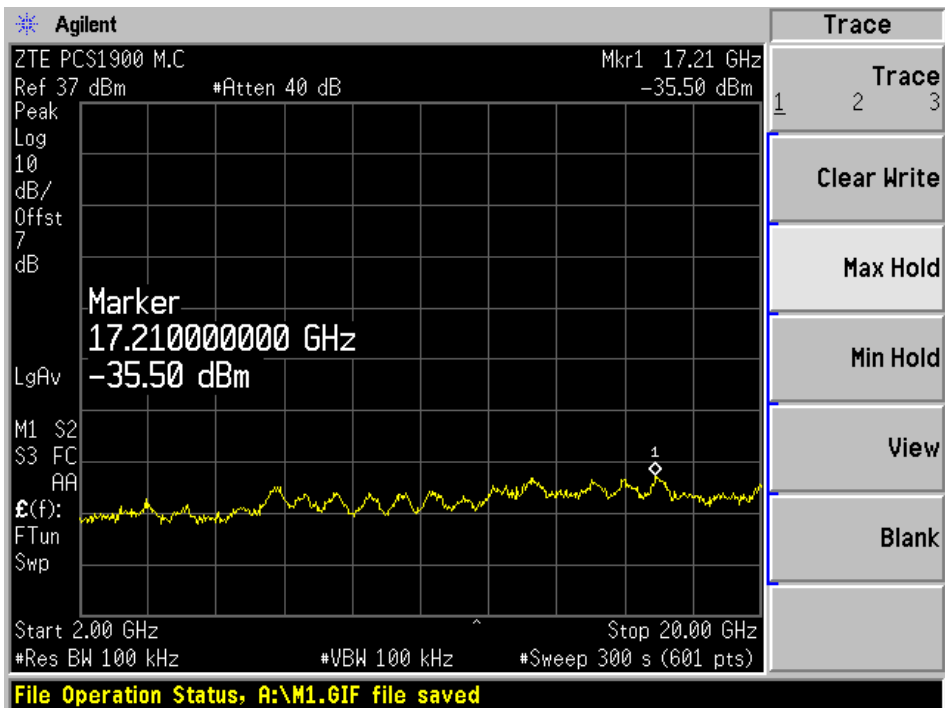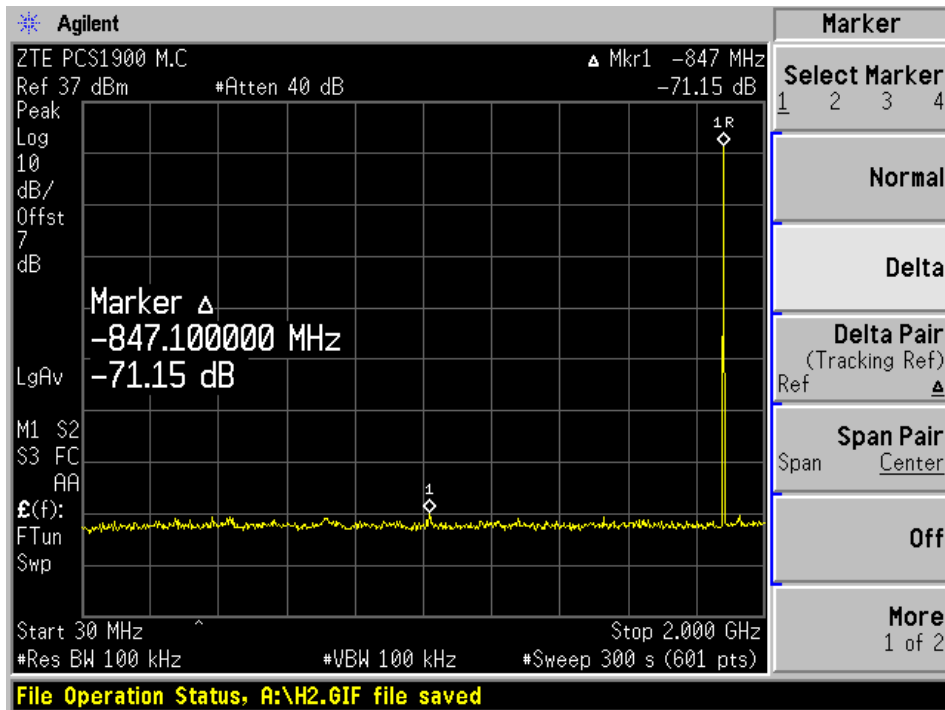

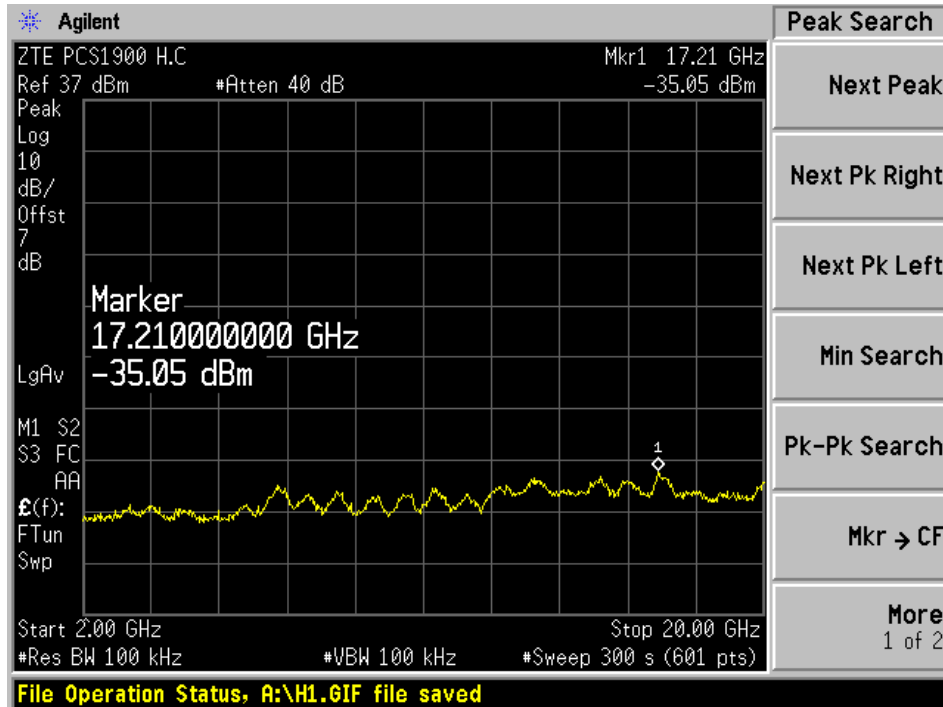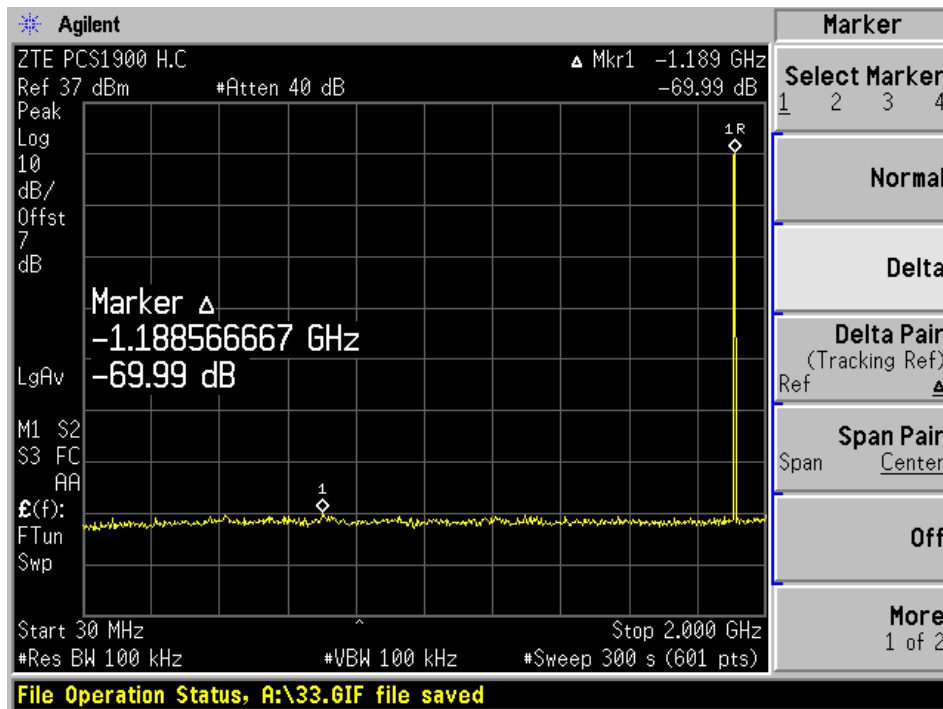

## §2.1055 (a), §2.1055 (d), §22.355, & §24.235 - FREQUENCY STABILITY

### Applicable Standard

Requirements: FCC § 2.1055 (a), § 2.1055 (d) & following:

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.

Table C-1\_Frequency Tolerance for Transmitters in the Public Mobile Services

| Frequency range (MHz) | Mobile<br>Base, fixed [SU][le]/<br>(ppm) |      | Mobile<br>SU]3 watts [le]3 watts<br>(ppm) |  |
|-----------------------|------------------------------------------|------|-------------------------------------------|--|
|                       |                                          |      |                                           |  |
| 25 to 50.....         | 20.0                                     | 20.0 | 50.0                                      |  |
| 50 to 450.....        | 5.0                                      | 5.0  | 50.0                                      |  |
| 450 to 512.....       | 2.5                                      | 5.0  | 5.0                                       |  |
| 821 to 896.....       | 1.5                                      | 2.5  | 2.5                                       |  |
| 928 to 929.....       | 5.0                                      | n/a  | n/a                                       |  |
| 929 to 960.....       | 1.5                                      | n/a  | n/a                                       |  |
| 2110 to 2220.....     | 10.0                                     | n/a  | n/a                                       |  |

According to §24.235, The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### Test Procedure

**Frequency Stability vs. Temperature:** The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

**Frequency Stability vs. Voltage:** An external variable DC power supply was connected to the battery terminals of the equipment under test. The voltage was set to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the battery end point. The output frequency was recorded for each battery voltage.

## Test Equipment List and Details

| Manufacturer  | Description                    | Model     | Serial Number | Cal. Date  |
|---------------|--------------------------------|-----------|---------------|------------|
| Rohde&Schwarz | Communication, Radio Universal | CMU200    | 103492        | 2005-05-24 |
| Tenney        | Oven, Temperature              | VersaTenn | 12.222-193    | 2004-06-04 |

\* **Statement of Traceability: BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

## Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 23° C     |
| Relative Humidity: | 42%       |
| ATM Pressure:      | 1021 mbar |

\* The testing was performed by Daniel Deng on 2005-06-17.

## Test Results

GSM 850:

Vs Temperature

| Condition   |                  | Ref Freq | Measured Freq | Frequency   | Limit | Result |
|-------------|------------------|----------|---------------|-------------|-------|--------|
| Voltage (v) | Temperature (C ) | MHz      | MHz           | Error (PPM) | PPM   |        |
| 3.7         | -30              | 836.6    | 836.600035    | 0.041836003 | 2.5   | Pass   |
| 3.7         | -20              | 836.6    | 836.600033    | 0.039445374 | 2.5   |        |
| 3.7         | -10              | 836.6    | 836.600025    | 0.029882859 | 2.5   |        |
| 3.7         | 0                | 836.6    | 836.600022    | 0.026296916 | 2.5   |        |
| 3.7         | 10               | 836.6    | 836.600015    | 0.017929715 | 2.5   |        |
| 3.7         | 20               | 836.6    | 836.600012    | 0.014343772 | 2.5   |        |
| 3.7         | 30               | 836.6    | 836.600026    | 0.031078173 | 2.5   |        |
| 3.7         | 40               | 836.6    | 836.600019    | 0.022710973 | 2.5   |        |
| 3.7         | 50               | 836.6    | 836.600031    | 0.037054745 | 2.5   |        |

Vs Voltage

| Condition   |                  | Ref Freq | Measured Freq | Frequency   | Limit | Result |
|-------------|------------------|----------|---------------|-------------|-------|--------|
| Voltage (v) | Temperature (C ) | MHz      | MHz           | Error (PPM) | PPM   |        |
| 3.45        | 20               | 836.6    | 836.600018    | 0.021515659 | 2.5   | Pass   |

## GSM 1900:

## Vs Temperature

| Condition   |                  | Ref Freq | Measured Freq | Frequency   | Limit | Result |
|-------------|------------------|----------|---------------|-------------|-------|--------|
| Voltage (v) | Temperature (C ) | MHz      | MHz           | Error (PPM) | PPM   |        |
| 3.7         | -30              | 1880     | 1880.000085   | 0.045212766 | 2.5   | Pass   |
| 3.7         | -20              | 1880     | 1880.000081   | 0.043085106 | 2.5   |        |
| 3.7         | -10              | 1880     | 1880.000072   | 0.038297872 | 2.5   |        |
| 3.7         | 0                | 1880     | 1880.000056   | 0.029787234 | 2.5   |        |
| 3.7         | 10               | 1880     | 1880.000059   | 0.031382979 | 2.5   |        |
| 3.7         | 20               | 1880     | 1880.000033   | 0.017553192 | 2.5   |        |
| 3.7         | 30               | 1880     | 1880.000046   | 0.024468085 | 2.5   |        |
| 3.7         | 40               | 1880     | 1880.000055   | 0.029255319 | 2.5   |        |
| 3.7         | 50               | 1880     | 1880.000062   | 0.032978723 | 2.5   |        |

## Vs Voltage

| Condition   |                  | Ref Freq | Measured Freq | Frequency   | Limit | Result |
|-------------|------------------|----------|---------------|-------------|-------|--------|
| Voltage (v) | Temperature (C ) | MHz      | MHz           | Error (PPM) | PPM   |        |
| 3.45        | 20               | 1880     | 1880.000036   | 0.019148936 | 2.5   | Pass   |

## §22.917 & §24.238 – BAND EDGE

### Applicable Standard

According to § 22.917, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §24.238, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency, RBW set to 30KHz.

### Test Equipment List and Details

| Manufacturer  | Description                    | Model  | Serial Number | Cal. Date  |
|---------------|--------------------------------|--------|---------------|------------|
| Rohde&Schwarz | Communication, Radio Universal | CMU200 | 103492        | 2005-05-24 |
| Agilent       | Analyzer, Spectrum             | E4446A | US44300386    | 2004-11-10 |

\* **Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

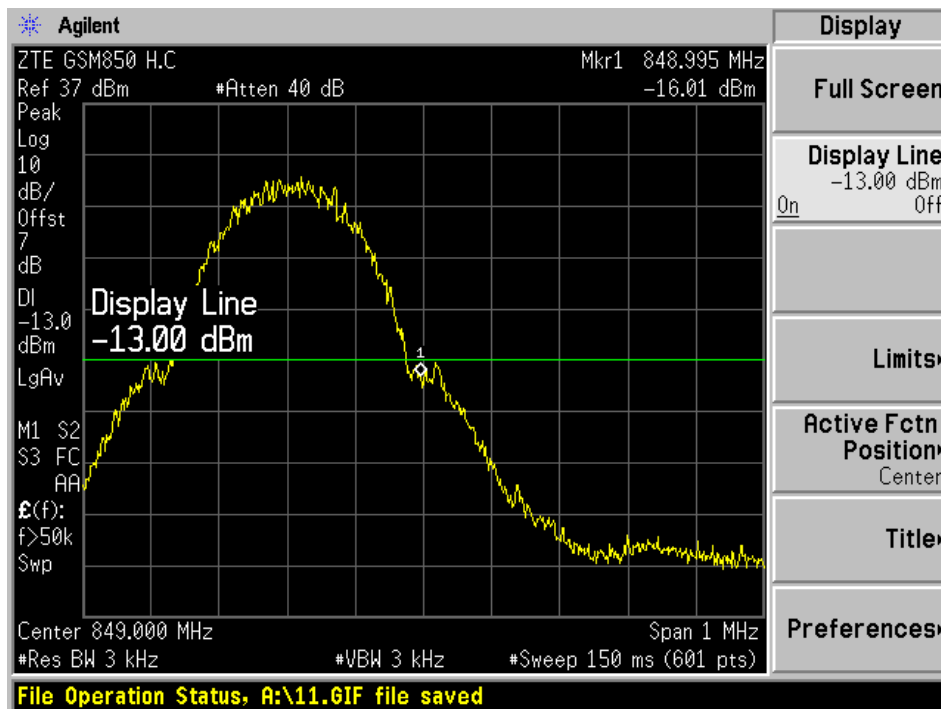
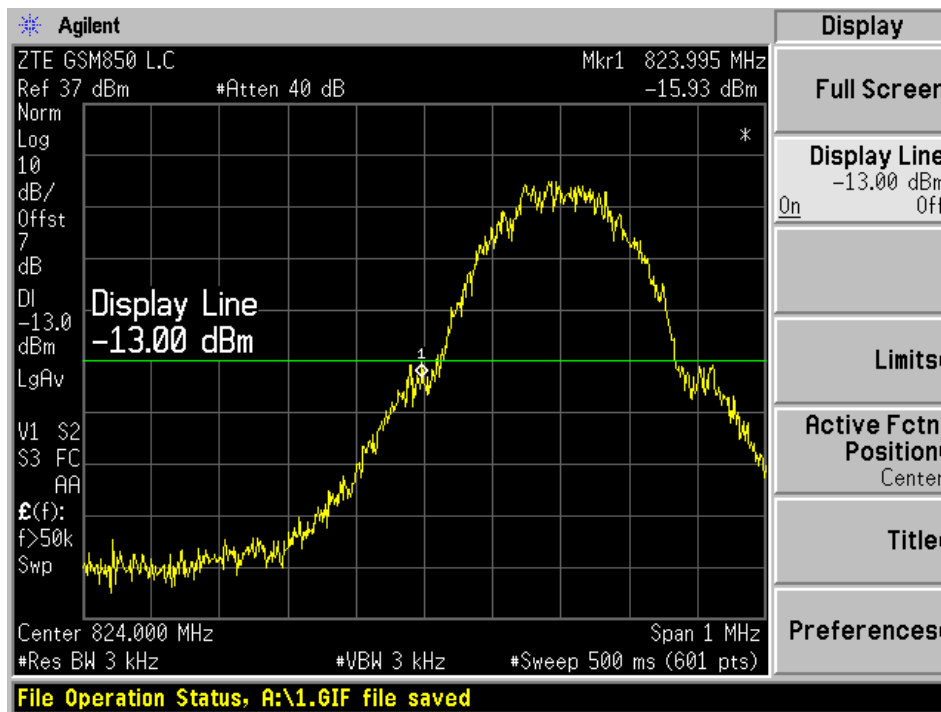
### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 22° C     |
| Relative Humidity: | 40%       |
| ATM Pressure:      | 1018 mbar |

\* The testing was performed by Daniel Deng on 2005-06-16.

### Test Results

Please refer to the following plots.

*Plots of Band Edge for Part 22*

*Plots of Band Edge for Part 24*