

Appendix F. FCC CDMA2000 SAR Measurement Procedures


Conducted Output Power:

The EUT was tested according to the requirements of the FCC 3G procedures and the 3.1.2.3.4.

A detailed analysis of the output power verification is provided as the table below:

Function Type	Reverse Traffic Channel	Test Mode	Radio Configuration		Service Option	Data Rates (kbps)	Power Control	Low Ch	Mid. Ch	High Ch
			Forward Traffic Channel (Fwd)	Reverse Traffic Channel (Rvs)				1013	384	777
CDMA2000 Cellular	FCH	1	1	1	55	Full	All Up	24.31	23.87	24.11
		3	3	3	55	Full	All Up	24.34	23.76	24.00
	F-SCH	3	3	3	32	FCH:Full,SCH 9.6	All Up	24.30	23.75	24.00
	SCH	3	3	3	32	FCH:Full,SCH 9.6	All Up	24.35	23.77	24.02
	EVDO Rev.0*	Subtype:0				RTAP 153.6	All Up	24.36	23.95	24.12
	EVDO Rev.A*	Subtype:0				RETAP 4096	All Up	24.33	23.92	24.10

CDMA2000 Setup Configuration:

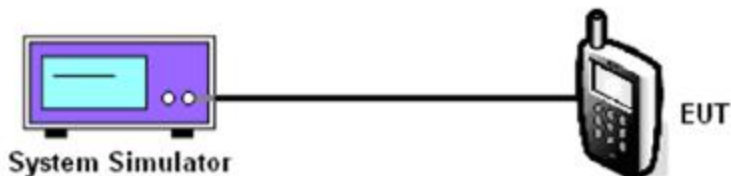

Setup Configuration

1. The EUT was connected to System Simulator, Agilent 8960. Refer to the drawing of Setup Configuration.
2. The RF path losses were compensated into the measurements.
3. A call was established between EUT and System Simulator with following setting:
 - a. For 1xRTT, set the Radio Configuration and the Service Option
 - b. For 1xEV-DO, set the Protocol Release and Data Rate
 - c. Set the Power Control to All Up Bits
4. The transmitted maximum output power was recorded.

Call Setup Screen			
Call Control	Active Cell Operating Mode		Call Params
Close Menu	Mobile Station Information ESN (Hex): ESN (Dec): MCC: MNC: NSN: Slot Class: Slot Cycle Index: ---- Protocol Revision:		Cell Power -86.00 dBm/1.23 MHz Cell Band US PCS Channel 1175
	FCH Service Option Setup		Protocol Rev 6 (IS-2000-0)
	Service Option	Value	Radio Config
	Service Option 1	\$055 (Loopback)	(Fud1, Rvs1)
	Service Option 2	\$09 (Loopback)	\$055 (Loopback)
	Service Option 3	\$01 (Voice)	\$055 (Loopback)
	Service Option 4	\$02 (Loopback)	\$055 (Loopback)
	Service Option 5	\$03 (Voice)	\$055 (Loopback)
	Service Option 6	\$06 (SRS)	\$055 (Loopback)
	Service Option 7	\$055 (Loopback)	FCH Service Option Setup
Service Option 8	\$068 (Voice)		
Active Cell Idle		Sys Type: IS-2000	
IntRef Offset			1 of 4

1xRTT setting for Radio Configuration 1 with Service Option 55

Call Setup Screen																					
Call Control	Active Cell Operating Mode		Call Params																		
Close Menu	Mobile Station Information ESN (Hex): ESN (Dec): MCC: MNC: MSIN: Slot Class: Slot Cycle Index: ---- Protocol Revision:		Cell Power -86.00 dBm/1.23 MHz Cell Band US PCS Channel 1175																		
	FCH Service Option Setup		Protocol Rev 6 (IS-2000-0)																		
	<table border="1"> <thead> <tr> <th>Service Option</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>S055 (Loopback)</td> <td>S055 (Loopback)</td> </tr> <tr> <td>S09 (Loopback)</td> <td>S09 (Loopback)</td> </tr> <tr> <td>S01 (Voice)</td> <td>S055 (Loopback)</td> </tr> <tr> <td>S02 (Loopback)</td> <td>S055 (Loopback)</td> </tr> <tr> <td>S03 (Voice)</td> <td>S055 (Loopback)</td> </tr> <tr> <td>S06 (SRS)</td> <td>S055 (Loopback)</td> </tr> <tr> <td>S055 (Loopback)</td> <td></td> </tr> <tr> <td>S032 (+ F-SCH)</td> <td></td> </tr> </tbody> </table>		Service Option	Value	S055 (Loopback)	S055 (Loopback)	S09 (Loopback)	S09 (Loopback)	S01 (Voice)	S055 (Loopback)	S02 (Loopback)	S055 (Loopback)	S03 (Voice)	S055 (Loopback)	S06 (SRS)	S055 (Loopback)	S055 (Loopback)		S032 (+ F-SCH)		Radio Config (Fud3, Rvs3) S055 (Loopback)
	Service Option	Value																			
	S055 (Loopback)	S055 (Loopback)																			
	S09 (Loopback)	S09 (Loopback)																			
	S01 (Voice)	S055 (Loopback)																			
	S02 (Loopback)	S055 (Loopback)																			
	S03 (Voice)	S055 (Loopback)																			
	S06 (SRS)	S055 (Loopback)																			
S055 (Loopback)																					
S032 (+ F-SCH)																					
Active Cell Idle		Sys Type: IS-2000																			
IntRef Offset		1 of 4																			

1xRTT setting for Radio Configuration 3 with Service Option 55

Call Setup Screen																					
Call Control	Active Cell Operating Mode		Call Params																		
Close Menu	Mobile Station Information ESN (Hex): ESN (Dec): MCC: MNC: MSIN: Slot Class: Slot Cycle Index: ---- Protocol Revision:		Cell Power -86.00 dBm/1.23 MHz Cell Band US PCS Channel 1175																		
	FCH Service Option Setup		Protocol Rev 6 (IS-2000-0)																		
	<table border="1"> <thead> <tr> <th>Service Option</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>S055 (Loopback)</td> <td>S055 (Loopback)</td> </tr> <tr> <td>S09 (Loopback)</td> <td>S09 (Loopback)</td> </tr> <tr> <td>S02 (Loopback)</td> <td>S032 (+ SCH)</td> </tr> <tr> <td>S03 (Voice)</td> <td>S055 (Loopback)</td> </tr> <tr> <td>S06 (SRS)</td> <td>S055 (Loopback)</td> </tr> <tr> <td>S055 (Loopback)</td> <td></td> </tr> <tr> <td>S032 (+ F-SCH)</td> <td></td> </tr> <tr> <td>S032 (+ SCH)</td> <td></td> </tr> </tbody> </table>		Service Option	Value	S055 (Loopback)	S055 (Loopback)	S09 (Loopback)	S09 (Loopback)	S02 (Loopback)	S032 (+ SCH)	S03 (Voice)	S055 (Loopback)	S06 (SRS)	S055 (Loopback)	S055 (Loopback)		S032 (+ F-SCH)		S032 (+ SCH)		Radio Config (Fud3, Rvs3) S032 (+ SCH)
	Service Option	Value																			
	S055 (Loopback)	S055 (Loopback)																			
	S09 (Loopback)	S09 (Loopback)																			
	S02 (Loopback)	S032 (+ SCH)																			
	S03 (Voice)	S055 (Loopback)																			
	S06 (SRS)	S055 (Loopback)																			
	S055 (Loopback)																				
S032 (+ F-SCH)																					
S032 (+ SCH)																					
Active Cell Idle		Sys Type: IS-2000																			
IntRef Offset		1 of 4																			

1xRTT setting for Radio Configuration 3 with Service Option 32

Call Setup Screen			
Call Control	Active Cell Operating Mode		Call Params
Operating Mode			Rus Power Ctrl
Active Cell	Access Terminal Information (AT Reported) Session Seed: Hardware ID Type (Hex): Hardware ID (Hex): Hardware ID (Decimal):		Active bits
	Access Terminal Information (AN Assigned) UATI 024: UATI Color Code: NAC Index:		Pur Ctrl Step
Start Data Connection			1.0 dB
	Protocol Release Session App: 0 (1xEV-DO) Test Applica: A (1xEV-DO-A) Limited TAP: B (1xEV-DO-B) AT Directed: DRC Value Fi: ACK Channel:		Call Drop Timer
Close Session			On
			Call Limit Mode
Handoff Setup			Off
AT Max Power			Protocol Rel
23 dBm/1.23MHz			0 (1xEV-DO)
	Active Cell	Sys Type: IS-856	
	Idle		
1 of 3	IntRef	Offset	PLSub0 RTAP 2 of 3

1xEV-DO setting for Protocol Release (Rev.0 or Rev.A)

Call Setup Screen			
Call Control	Active Cell Operating Mode		Call Params
Operating Mode			Cell Power
Active Cell	Access Terminal Information (AT Reported) Session Seed: Hardware ID Type (Hex): Hardware ID (Hex): Hardware ID (Decimal):		-86.00
	Access Terminal Information (AN Assigned) UATI 024: UATI Color Code: NAC Index:		dBm/1.23 MHz
Start Data Connection			Cell Band
	RTAP Rate Session App: 9.6 kbps Test Applica: 19.2 kbps Limited TAP: 38.4 kbps AT Directed: 76.8 kbps DRC Value Fi: 153.6 kbps ACK Channel:		US PCS
Close Session			Channel
			1175
Handoff Setup			Application Config
AT Max Power			FTAP Rate
23 dBm/1.23MHz			307.2 kbps
			(2 Slot, QPSK)
			RTAP Rate
			9.6 kbps
	Active Cell	Sys Type: IS-856	
	Idle		
1 of 3	IntRef	Offset	PLSub0 RTAP 1 of 3

1xEV-DO setting for RTAP data rate (153.6 kbps)



Call Setup Screen				
Call Control	Active Cell Operating Mode			Call Params
Operating Mode	Access Terminal Information (AT Reported)			Cell Power
Active Cell	Session Seed: Hardware ID Type (Hex): Hardware ID (Hex): Hardware ID (Decimal):			-86.00
	Access Terminal Information (AN Assigned)			dBm/1.23 MHz
Start Data Connection	UATI 024: ---- UATI Color Code: ---- MAC Index: ----			Cell Band
	Application Configuration			US PCS
Close Session	Session App	R-Data Packet Size	Application	Channel
	Enhanced Te	128	AP	1175
	AT Directed	256	Z	
Handoff Setup	DNC Value F	512		Application Config
	ACK Channel	768		F-Traffic Format
	ACK Channel	768		4 (1024,2,128)
AT Max Power	Reverse Data	1024	Capacity	(307.2k, QPSK)
23 dBm/1.23MHz	Expected En	1536	kbps	R-Data Pkt Size
				128
				bits
	Active Cell	Sys Type: IS-856		
	Idle			
1 of 3		IntRef	Offset	PLSub0 RETAP 1 of 3

1xEV-DO setting for RETAP data rate (4096 kbps)



Reference:

- [1] SAR Measurement Procedures for 3G Devices CDMA 2000/Ev-Do/WCDMA/HSDPA, June 2006
Laboratory Division Office of Engineering and Technology Federal Communications Commission
- [2] 3.1.2.3.4 Maximum RF Output Power 3GPP2 C.S0033-0 Version 2.0, Date: 12 December 2003
Recommended Minimum Performance Standards for cdma2000 High Rate Packet Data Access
Terminal