

Measurement Report

FCC ID:Q7KREVO-V3-12

This report concerns (check one) : Original Grant Class II Change

Issued Date : Nov. 16, 2003
Project No. : 03E0313
Equipment : Notebook PC
Model No. : REVOLUTION SERIES 3000 WACOM
Applicant : TAIWAN MYCOMP CO., LTD.
1FL, NO. 16, LANE 50, NANKANG RD., SEC. 3,
NANKANG DISTRICT, TAIPEI, TAIWAN

Tested by :

Neutron Engineering Inc. EMC Laboratory

Data of Test :

Jun. 13, 2003 ~ Oct. 08, 2003

Testing Engineer :

Alan Liu

(Alan Liu)

Technical Manager :

Andy Chiu

(Andy Chiu)

Authorized Signatory :

George Yao

(George Yao)

NEUTRON ENGINEERING INC.

No. 132-1, Lane 329, Sec. 2, Palain Rd.,

Shijr Jen, Taipei, Taiwan

TEL : (02) 2646-5426 FAX : (02) 2646-6815



Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

Neutron's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron**'s authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Assessment Authorities



Test Standard/Scope/Item Acceptance

FCC Part 15 Subpart B
IEC/CISPR22
AS/NZS 3548
CNS 13438

FCC Part 15 Subpart B
CISPR 22/EN 55022
AS/NZS 3548
VCCI -Technical Requirement
CNS 13438
SS IEC/CISPR 22
IEC/EN 61000-3-2 IEC/EN 61000-4-5
IEC/EN 61000-3-3 IEC/EN 61000-4-6
IEC/EN 61000-4-2 IEC/EN 61000-4-8
IEC/EN 61000-4-3 IEC/EN 61000-4-11
IEC/EN 61000-4-4

	Table of Contents	Page
1 General Information		6
1.1 Applicant		6
1.2 Manufacturer		6
1.3 Equipment Under Tested		6
1.4 OEM Brand/Model		6
1.5 Product Description		6
1.6 Connecting I/O Port(s)		6
1.7 Power Supplied		6
1.8 Products Covered		7
1.9 Model Difference (Series, Versions, if any)		7
1.10 EUT Modifications		7
1.11 Electric Block Diagram		7
1.12 Photos of EUT		7
2 RFI Emissions Measurement		8
2.1 Test Facility		8
2.2 Standard Compliance		8
2.3 Test Conditions and Channel		8
2.4 Test Methodology		8
2.5 Deviations from Standard Test Method		8
2.6 Sample(s) Tested		9
2.7 Measurement Instrument		9
2.8 Measurement Uncertainty		9
2.9 Tested System Set-Up/Configuration Details		9
Table -1 Equipments Used in Tested System		10
Diagram -1 Block diagram showing the configuration of system tested		11
Table - 2 Equipments Used in Tested System		12
Table - 3 Information of Interface Cable		12
2.10 Max.(Worst Case) RF Emission Evaluation		13
2.11 EUT Operation		13
3 Justification		14
3.1 Limitations		14
3.1.1 Power Line Conducted Emission		14
3.1.2 Radiated Emission Limits		14
3.2 Measurement Justification		15
3.2.1 Conducted Emission		15
3.2.2 Radiated Emission		15
3.2.3 Field Strength Calculation		16
3.3 Measurement Data		18
Table 4 Conducted Emission Data		20
Table 5 Radiated Emission Data		22
4 Hopping Channel Carrier Frequency Separated		30
4.1 Applied standard / limit		30

Table of Contents		Page
4.2	Test Setup	30
4.3	Test Result	30
5.	Number of Hopping Channel	31
5.1	Applied standard / limit	31
5.2	Test Setup	31
5.3	Test Result	31
6.	Average Time of Occupancy	32
6.1	Applied standard / limit	32
6.2	Test Setup	32
6.3	Test Result	32
7.	Bandwidth	33
7.1	Applied standard / limit	33
7.2	Test Setup	33
7.3	Test Result	33
8.	Peak Output Power	34
8.1	Applied standard / limit	34
8.2	Test Setup	34
8.3	Test Result	34
9.	Antenna conducted Spurious Emission	35
9.1	Applied standard / limit	35
9.2	Test Setup	35
9.3	Test Result	35
10.	Power Spectral Density	36
10.1	Applied standard / limit	36
10.2	Test Setup	36
10.3	Test Result	36
11.	Maximum Permissible Exposure (MPE)	37
11.1	Applied standard / limit	37
11.2	Test Result	37
12.	Attachment	38
A.	Electric Block Diagram	39
B.	EUT Modification Description	40
C.	EUT Test Photos	41
D.	EUT Photos	44
E.	User' s Manual	113
F.	Hopping Channel Carrier Frequency Separated	114
G.	Number of Hopping Channel	116
H.	Average Time of Occupancy	118
I.	Bandwidth	121
J.	Peak Output Power	126
K.	Antenna conducted Spurious Emission	131
L.	Power Spectral Density	133
M.	Restricted Bands Requirements	135-1
N.	Product Labeling	136

1. General Information**1.1 Applicant**

Name TAIWAN MYCOMP CO., LTD.

Address 1FL, NO. 16, LANE 50, NANKANG RD., SEC. 3, NANKANG DISTRICT, TAIPEI, TAIWAN

1.2 Manufacturer

Name N/A

Address N/A

1.3 Equipment Under Tested

Name: Notebook PC

Trade Name: kontron

Model No.: REVOLUTION SERIES 3000 WACOM

1.4 OEM Brand/Model (if applicable)

OEM Brand(s)/Model(s) except the basic model in sub-clause 1.3 is(are) the follows:

OEM Brand: MYCOMP

Model No.: REVOLUTION SERIES 3000 WACOM

1.5 Product Descriptions(Application/Features/Specification)

The EUT is a Notebook PC. A major technical descriptions of EUT is described as following:

CPU	Intel Mobile Pentium®III-M 1.2 GHz or higher
Main Battery	Lithium Ion battery - 57 Watt, 3.5 hour life (approximate)
BIOS	PhoenixBIOS 4.0, Release 6
RAM	128 MB SDRAM standard
L2-Cache	512KB
Keyboard	Full-size QWERTY keyboard with 84 keys (USA Standard)
Interfaces	1x Power Connector with 10-28 VDC, 4.6 Amps 1x Serial Port (COM 1) 2x USB 2.0 Ports Docking connector 1x RJ11 56K V.90 Modem 1x RJ45 10/100Mbs Ethernet/LAN Audio phone jacks: 1x MIC-In 1x Line-In 1x Speaker-Out Integrated: 802.11b WLAN, Bluetooth PAN
PCMCIA	Card BUS connector provides two open PC Card slots that accommodate two Type II, or one Type III PCMCIA device.
Graphics Controller	Integrated Direct AGP Graphics Core frequency up to 166 MHz 350 MHz RAM DAC Video-RAM: 8 to 48 MB of Dynamic Video Memory (shared) Up to 32 MB with 128 MB RAM; 48 MB with 256 MB RAM

Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual (Attachment - E.)

Channel List (for Bluetooth)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2402	31	2432	61	2462
02	2403	32	2433	62	2463
03	2404	33	2434	63	2464
04	2405	34	2435	64	2465
05	2406	35	2436	65	2466
06	2407	36	2437	66	2467
07	2408	37	2438	67	2468
08	2409	38	2439	68	2469
09	2410	39	2440	69	2470
10	2411	40	2441	70	2471
11	2412	41	2442	71	2472
12	2413	42	2443	72	2473
13	2414	43	2444	73	2474
14	2415	44	2445	74	2475
15	2416	45	2446	75	2476
16	2417	46	2447	76	2477
17	2418	47	2448	77	2478
18	2419	48	2449	78	2479
19	2420	49	2450	79	2480
20	2421	50	2451		
21	2422	51	2452		
22	2423	52	2453		
23	2424	53	2454		
24	2425	54	2455		
25	2426	55	2456		
26	2427	56	2457		
27	2428	57	2458		
28	2429	58	2459		
29	2430	59	2460		
30	2431	60	2461		
Channel List (for 802.11b)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	05	2432	09	2452
02	2417	06	2437	10	2457
03	2422	07	2442	11	2462
04	2427	08	2447		

1.6 Connecting I/O Port(s)

Please refer to the User's Manual (Attachment - **E**.)

1.7 Power Supplied

Power Source: AC Mains.

Power Cord: Permanently connected, non-shielded type, attached with a ferrite core.

Power Rating: AC I/P 100-240Vac, 1.8A, 60W, 50-60Hz /DC O/P 12Vdc, 4.58A

1.8 Products Covered (if applicable)

The sample tested including the following sub-system/module/accessory :

Sub-system/ Module/ Accessory	Model/Type No.	Int.	Inst./ Ext.	Cont.
Adapter	F1960A/ ILAN		Ext.	
Adapter	F19603A/ ILAN		Ext.	
Docking	REVO-IOSTICK/ kontron		Int.	
3.5" FLOPPY DRIVE MODULE	REVO-FDD/ kontron		Int.	
CD-RW ROM DRIVE MODULE	REVO-CD-RW/ kontron		Int.	
DVD ROM DRIVE MODULE	REVO-DVD/ kontron		Int.	
DVD/CD-RW ROM DRIVE MODULE	REVO-DVD/CD-RW/ kontron		Int.	
CD-ROM DRIVE MODULE	REVO-CD/ kontron		Int.	
RF MODULE	EM9-BT/WISTRON		Int.	
RF MODULE	EM9-NB/WISTRON		Int.	

Note:

RFMODULE: EM9-BT is identical to the RF MODULE: EM9-NB except the function designation.

EM9-BT: WLAN and Bluetooth

EM9-NB: Only WLAN(removed the Bluetooth function)

The EUT operated RF Module:EM9-BT was found to be the worst case and collecting test data included in this report.

1.9 Model Difference (Series, Versions, if any)

Except the basic model no. (model designation of the sample tested in this test report), additional model no. covered is(are) :

N/A

1.10 EUT Modifications (if applicable)

No any modification required for the EUT to comply with the standards.

1.11 Electric Block Diagram

Please refer to the Attachment – **A**.

1.12 Photos of EUT

Please refer to the Attachment – **D**.

2. RFI Emissions Measurement

2.1 Test Facility

The test facilities used to collect the test data in this report located at No.132-1, Lane 329, Sec. 2, Palain Road, Shijr City, Taipei, Taiwan.

2.2 Standard Compliance

The test data contained in this report relate only to the item(s) listed below :

FCC Part15, Subpart C / ANCI C63.4 : 1992

The composite system (including receiver and transmitter) in compliance with Subpart B is authorized under a DoC procedure.

2.3 Test Conditions and Channel

802.11b WLAN			NOTE:(3)
Test Mode	EUT Channel	Test Frequency (MHz)	
1	CH 01	2412	
2	CH 06	2437	
3	CH 11	2462	

Bluetooth PAN (3)			NOTE:(1)/(2)
Test Mode	EUT Channel	Test Frequency (MHz)	
1	CH 01	2402	
2	CH 40	2441	
3	CH 79	2480	

Note:

- (1)The measurements are performed at the highest, middle, lowest available channels with the hopping function disabled.
- (2)Unless otherwise specified the above condition, the test was performed while EUT had its hopping function enabled.
- (3)The measurements are performed at the highest, middle, lowest available channels.

2.4 Test Methodology

Both conducted and radiated testing were performed during the max. EMI emission evaluation.

Test procedures according to the technical standards : (Antenna to EUT distance is 3 m)

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Equipment test requirement		Result
		802.11b	Bluetooth	
15.207	Conducted Emission	Applicable	Applicable	PASS
15.247 (c)	Antenna conducted Spurious Emission	Applicable	Applicable	PASS
15.247 (a)(1)	Hopping Channel Carrier Frequency Separated	N/A	Applicable	PASS
15.247 (a)(1)(ii)	Number of Hopping Channel	N/A	Applicable	PASS
15.247 (a)(1)(ii)	Average Time of Occupancy	N/A	Applicable	PASS
15.247 (a)(1)(ii)	20dB Bandwidth	N/A	Applicable	PASS
15.247 (a)(2)	6dB Bandwidth	Applicable	N/A	PASS
15.247 (b)	Peak Output Power	Applicable	Applicable	PASS
15.247 (c)	Radiated Spurious Emission	Applicable	Applicable	PASS
15.247 (d)	Power Spectral Density	Applicable	N/A	PASS
15.203	Antenna Requirement	Applicable	Applicable	PASS
1.1307 1.1310 2.1091 2.1093	RF Exposure Compliance	Applicable	Applicable	PASS

2.5 Deviations from Standard Test Method

N/A

2.6 Sample(s) Tested

The representative sample tested in this report is(are): REVOLUTION SERIES 3000 WACOM
Test results in this test report relate only to the sample(s) tested.

The EUT has been tested according to the following environmental condition:

Input Power	110 Vac/60Hz
Temperature	28
Relative Humidity	68 %

2.7 Measurement Instruments

Valid measurement instruments used in this report refer to **Table-1** enclosed.

2.8 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2** , providing a level of confidence of approximately **95 %**.

A. Conducted Measurement :5.05dB

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)	NOTE
OS-01	ANSI	30MHz ~ 200MHz	H	4.59	
		30MHz ~ 200MHz	V	4.80	
		200MHz ~ 1,000MHz	H	4.47	
		200MHz ~ 1,000MHz	V	5.03	

2.9 Tested System Set-Up/Configuration Details

The system was configured for testing in a typical fashion (as a user would normally use) or in-accordance with the operating configuration specified in the user's manual. A Block Diagram(please refer to the Diagram - 1) and Photos(please refer to the attachment - C) showing the set-up/configuration of system tested. In addition, **Table-2** and **Table-3** provide a detail of all equipment items and cables information used in the system tested.

Table -1 Measurement Instruments List

Item	Instruments	Mfr/Brand	Model/Type No.	Serial No.	Calibrated Date	Next Cali. Date	Note
1	LISN	EMCO	3825/2	9605-2539	2003-06-10	2004-06-09	✓
2	LISN	Rolf Heine	NNB-2/16Z	98083	2003-10-31	2004-10-30	✓
3	LISN	Rolf Heine	NNB-2/16Z	98053	2003-11-14	2004-11-13	
4	Pulse Limiter	Electro-Metrics	EM-7600	112644	2002-12-09	2003-12-08	✓
5	50 Terminator	N/A	N/A	N/A	2003-05-09	2004-05-08	✓
6	Test Cable	N/A	C01	N/A	2002-12-10	2003-12-09	✓
7	Log-Bicon Antenna	MESS-ELEKTRONIK	VULB 9160	3058	2003-10-21	2004-10-20	
8	Log-Bicon Antenna	MESS-ELEKTRONIK	VULB 9160	3060	2003-10-21	2004-10-20	✓
9	Log-Bicon Antenna	MESS-ELEKTRONIK	VULB 9160	3115	2003-04-17	2004-04-16	
10	Log-Bicon Antenna	MESS-ELEKTRONIK	VULB 9161	4022	2003-07-14	2004-07-13	
11	Test Cable	N/A	10M_OS01	N/A	2002-12-10	2003-12-09	
12	Test Cable	N/A	OS01-1/-2	N/A	2002-12-10	2003-12-09	✓
13	Test Cable	N/A	10M_OS02	N/A	2002-12-10	2003-12-09	✓
14	Test Cable	N/A	OS02-1/-2/-3	N/A	2002-12-10	2003-12-09	
15	RF Switch	Anritsu	MP59B	M65982	2001-12-09	2003-12-08	
16	Quasi-Peak Adapter	HP	85650A	2521A00844	2003-10-20	2004-04-19	
17	RF Pre-Selector	HP	85685A	2648A00417	2003-10-20	2004-04-19	
18	Spectrum Analyzer	HP	85680B	2634A03025	2003-10-20	2004-04-19	
19	Spectrum Monitor	HP	85662B	2648A13616	2003-10-20	2004-04-19	
20	Pre-Amplifier	Anritsu	MH648A	M09961	2002-12-09	2003-12-08	✓
21	Spectrum Analyzer	ADVAN TEST	R3261C	81720298	2003-08-13	2004-08-12	✓
22	Test Receiver	R&S	ESH3	860156/018	2003-10-21	2004-10-20	
23	Test Receiver	R&S	ESVP	860687/009	2002-12-06	2003-12-05	
24	Test Receiver	MEB	SMV41	130	2002-12-06	2003-12-05	✓
25	Test Receiver	PMM	PMM 9000	4310J01002	2003-10-03	2004-10-02	
26	Horn Antenna	EMCO	3115	9605-4803	2003-05-23	2004-05-22	✓
27	Test Receiver	R&S	ESMI	843977/005	2003-01-13	2004-01-12	
28	Pre-Amplifier	R&S	ESMI-Z7	1045.5020.9801 (612.278 041 00)	2003-05-19	2004-05-18	
29	Absorbing Clamp	R&S	MDS-21	841077/011	2003-08-14	2004-08-13	
30	Voltage Probe	R&S	ESH2-Z3	841.800/023	2003-08-26	2004-08-25	
31	Signal Generator	HP	8648A	3426A01034	2002-10-11	2004-10-08	
32	Antenna Mast	Chance Most	CMTB-1.5	N/A	N/A	N/A	✓
33	Turn Table	Chance Most	CMTB-1.5	N/A	N/A	N/A	✓

Remark :

(1)" ✓" indicates the instrument used in Test Report.

(2)" N/A" denotes No Model No. / Serial No. and No Calibration specified.

Diagram - 1
Block diagram showing the configuration of system tested

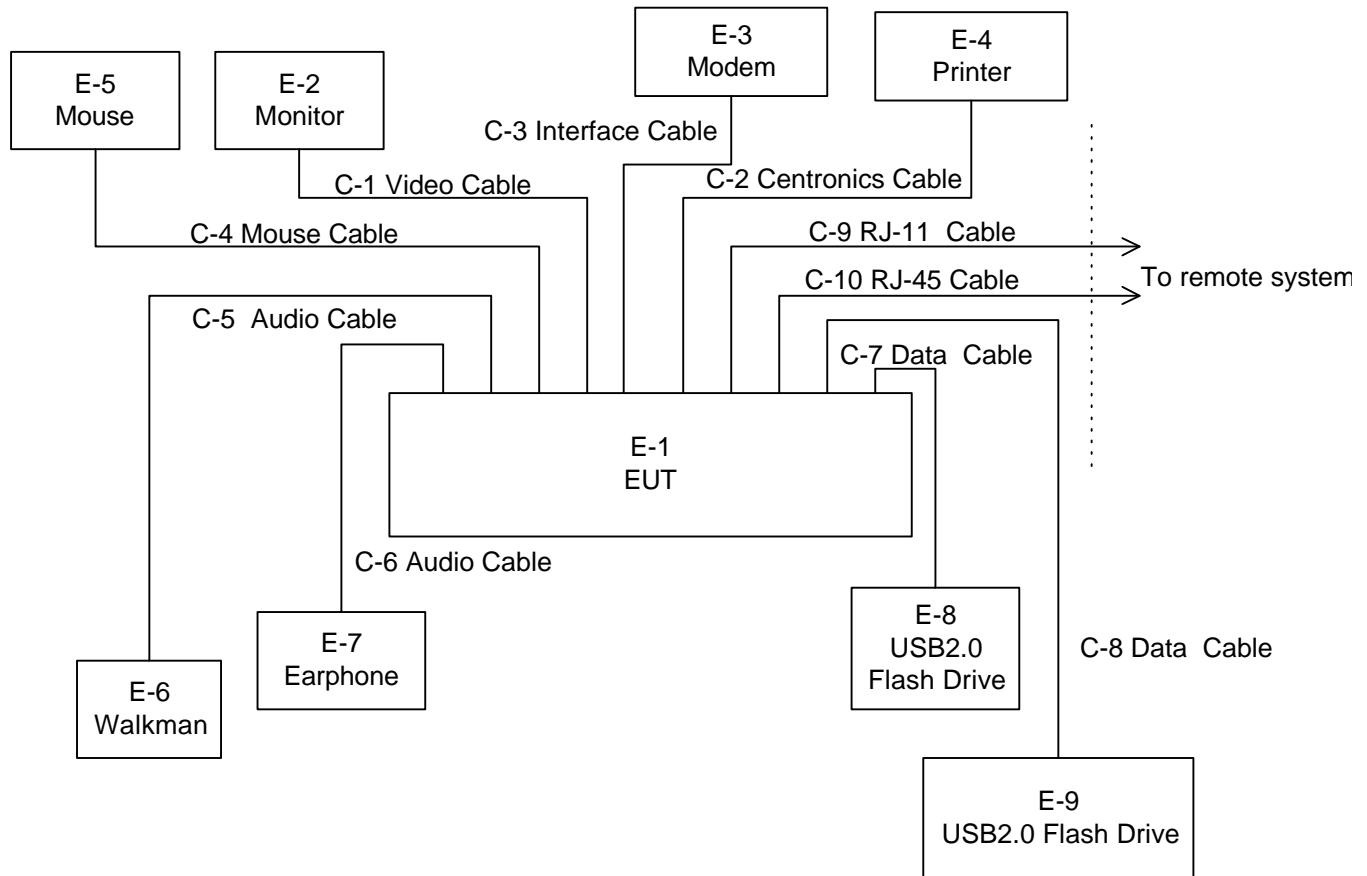


Table - 2 Equipments Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	Notebook PC	kontron	REVOLUTION SERIES 3000 WACOM	Q7KREVO-V3-12		EUT
E-2	Monitor	HITACHI	CM753ET	N/A(3)	T8L000003	
E-3	Modem	ACEEX	DM-1414V	N/A(3)	8041708	
E-4	Printer	SII	DPU-414	N/A(3)	1045105A	
E-5	PS/2 Mouse	HP	P8131	N/A(3)	5185-1212	
E-6	Walkman	N/A	KT-V860	N/A	N/A	
E-7	Earphone	N/A	N/A	N/A	N/A	
E-8	USB 2.0 Flash Drive	Transcend	TS512MF2A	N/A(3)	N/A	
E-9	USB 2.0 Flash Drive	Transcend	TS1GJF2A	N/A(3)	N/A	

Note:

- (1) Unless otherwise denoted as EUT in "Remark" column, device(s) used in tested system is a support equipment.
- (2) Unless otherwise marked as in "Remark" column, Neutron consigns the support equipment to the tested system.
- (3) The support equipment was authorized by Declaration of Confirmation.

Table - 3 Information of Interface Cable

Item	Shielded Type	Ferrite Core	Length	Note
C-1	YES	YES	1.8M	
C-2	YES	NO	1.5M	
C-3	YES	NO	1.8M	
C-4	YES	NO	1.5M	
C-5	NO	NO	1.5M	
C-6	NO	NO	1.5M	
C-7	YES	NO	1.2M	
C-8	YES	NO	1.2M	
C-9	NO	NO	10M	
C-10	NO	NO	10M	

Note:

- (1) Unless otherwise marked as in "Remark" column, Neutron consigns the support equipment to the tested system.
- (2) For detachable type I/O cable should be specified the length in cm in "Length" column.

2.10 Max.(Worst Case) RF Emission Evaluation

- (a) Both conducted and radiated testing were performed during the max. EMI emission evaluation.
- (b) This system was configured for testing in a typical fashion (as a customer would normally use it). The EUT was connected to support equipment such as monitor, keyboard, modem ..and printer were contained in this system in order to comply with the CISPR22 (1997) and ANSI C63.4 (1992) Rules requirement. This operating condition was tested and used to collect the included data.
The EUT tested by connecting RJ 11 and RJ45 cables to the remote system. The simulation testing was used to collect the final test data.
About RF device, it's programmed to continuously transmit & receive during test. This operating condition was tested and used to collect the included data.
- (c) To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of this EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.
These operation modes were used for final testing and collecting test data included in this report.

2.11 EUT Operation

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use. The program contained on a EUT hard disk and is auto-starting on power-up. Once loaded, the program sequentially exercises each system component in turn. The sequence used is:

1. Read (write) from (to) mass storage device (Disk).
2. Send "H" pattern to video port device (Monitor).
3. Send " H " pattern to parallel port device (Printer).
4. Send " H " pattern to serial port device (Modem).
5. Repeated from 2 to 4 continuously.

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

The measurements are performed at the highest, middle, lowest available channels with the operating function disabled. Unless otherwise specified the above condition, the test was performed while EUT had its operating function enabled.

3. Justification

3.1 Limitations

3.1.1 Power Line Conducted Emission

Measurement Frequency Range (MHz)	Mains Terminal Class A Limits (dBuV)		Mains Terminals Class B Limits (dBuV)		Note CISPR FCC Std.
	QP Mode	AV Mode	QP Mode	AV Mode	
	79.00	66.00	66 - 56 *	56 - 46 *	
0.15 - 0.50	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 - 5.00	73.00	60.00	56.00	46.00	CISPR
5.00 - 30.0	73.00	60.00	60.00	50.00	CISPR
0.45-1.705	60.00	N/A	48.00	N/A	FCC
1.705-30.0	69.50	N/A	48.00	N/A	FCC

Notes:

- (1). The tighter limit applies at the band edges.
- (2). The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

3.1.2 Radiated Emission Limits (Frequency Range 30MHz-1000MHz)

Measurement Frequency Range (MHz)	Quasi-Peak Mode Class A Limits (dBuV/m)		Quasi-Peak Mode Class B Limits (dBuV/m)		Note CISPR FCC Std.
	10m	30m	10m	3m	
30.00 -230.00	40.00	30.00	30.00	40.00	CISPR
230.0 -1000.0	47.00	37.00	37.00	47.00	CISPR
30.00 - 88.00	39.00	N/A	30.00	40.00	FCC
88.00 - 216.0	43.50	N/A	33.50	43.50	FCC
216.0 -960.0	46.00	N/A	36.00	46.00	FCC
above 960.0	49.50	N/A	46.00	54.00	FCC

Notes:

- (1). The tighter limit applies at the band edges.
- (2). Emission level (dBuV/m)=20log Emission level (uV/m).
- (3). A measuring distance Of 10m is a primary used. However, either 3m or 10m (instead of 10m) distance my be allowed. If the distance is 3m, add 10dB to the QP-limit above. If the distance is 10m, subtract 10dB from the QP-limit above.

3.2 Measurement Justification

3.2.1 Conducted Emission

The EUT is placed on a table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-1992. Conducted emissions from the EUT measured in the **frequency range between 0.15 MHz and 30MHz** were made with a **Spectrum Analyzer** using **CISPR Quasi-Peak detector mode**.

The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and these signals are then Quasi Peak detector mode and/or Average detector mode re-measured.

Data of **Table - 4.** lists the significant emission frequencies, measured levels, limits and safe margins. All readings are Peak Mode measured unless otherwise stated as QP or AV in column of " Remark ".

If the Peak Mode measured value lower than both QP Mode and AV Mode Limit, EUT shall be deemed to compliance with both QP & AV Limits and then no additional QP Mode or AV Mode measurement performed.

If additional QP or AV Mode measurement needed, and if the QP Mode measured value compliance with the QP Mode Limit and lower than AV Mode Limit, the EUT shall be deemed to meet both QP & AV Limits and then only QP Mode was measured, but AV Mode was not performed.

3.2.2 Radiated Emission

The EUT is placed on a turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-1992.

The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak, Peak or Average detector mode re-measured.

Data of **Table – 5** lists the significant emission frequencies, measured levels, limits and safe margins. All readings are Peak Mode measured unless otherwise stated as QP or AV in column of " Remark ".

If the Peak Mode measured value compliance with and lower than Quasi Peak or Average Mode Limit, the EUT shall be deemed to meet QP/AV Limits and then no additional QP/AV Mode measurement performed.

3.2.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as **FS = RA + AF + CL - AG**

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor (1)

CL = Cable Attenuation Factor(Cable Loss) (1)

AG = Amplifier Gain (1)

Remark :

- (1) The Correction Factor = AF + CL - AG, as shown in the data tables' Correction Factor column.


3.3 Measurement Data

Table - 4. Conducted Emission Data

Table - 5. Radiated Emission Data (30-1000MHz)-

Radiated Emission Data (above 1000MHz)

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

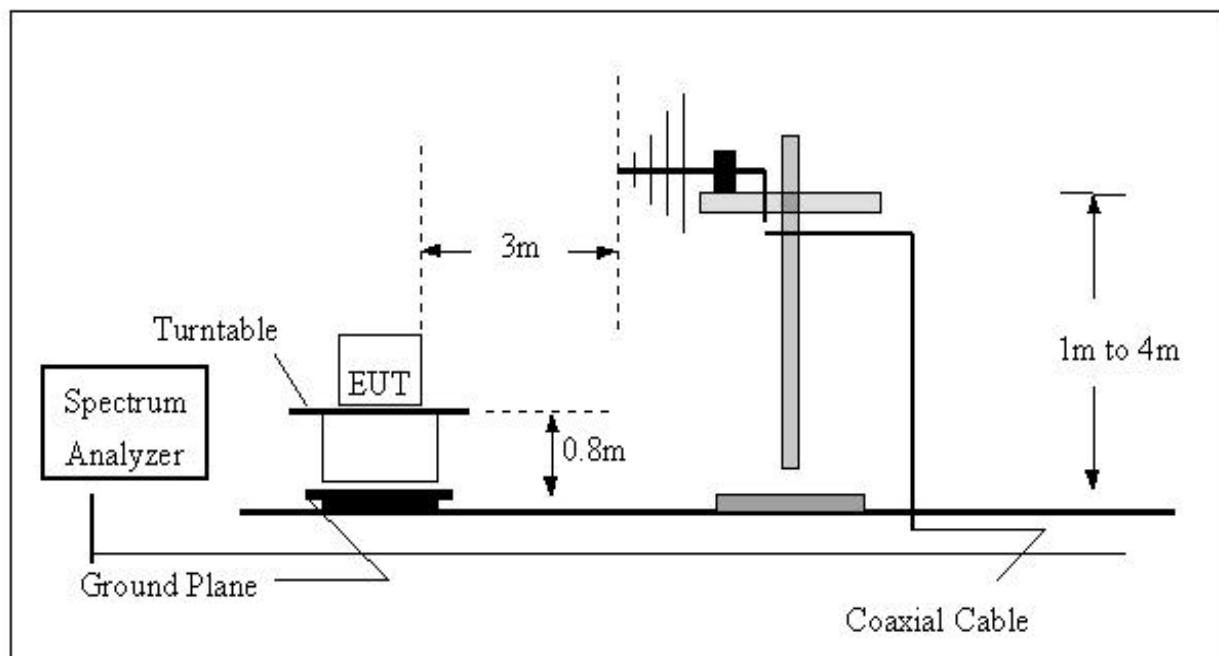

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

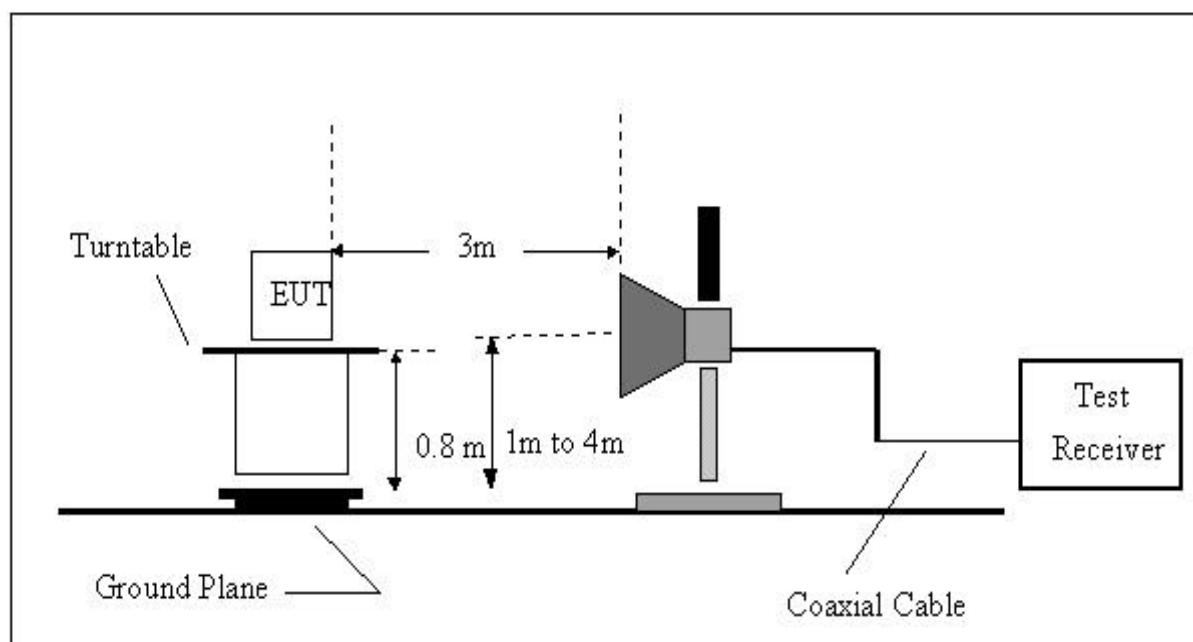


Table 4 Conducted Emission Data

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

802.11b WLAN

The following table lists worst case data from TX / RX with various bit-rates on various channels.

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limits(dBuV)		Safe (dBuV)	Margins Note
		QP-Mode	AV-Mode	QP-Mode	AV-Mode		
0.17	Line	47.64	*	64.96	54.96	-17.32	(QP)
0.85	Line	37.61	*	56.00	46.00	-18.39	(QP)
2.04	Line	36.19	*	56.00	46.00	-19.81	(QP)
3.96	Line	37.82	*	56.00	46.00	-18.18	(QP)
7.94	Line	37.62	*	60.00	50.00	-22.38	(QP)
13.48	Line	36.70	*	60.00	50.00	-23.30	(QP)
0.34	Neutral	40.32	*	59.18	37.40	-18.86	(QP)
0.91	Neutral	36.68	*	56.00	46.00	-19.32	(QP)
1.87	Neutral	35.20	*	56.00	46.00	-20.80	(QP)
3.96	Neutral	36.18	*	56.00	46.00	-19.82	(QP)
7.94	Neutral	36.10	*	60.00	50.00	-23.90	(QP)
14.29	Neutral	34.11	*	60.00	50.00	-25.89	(QP)

Remark

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector RBW=9KHz ; SPA setting in RBW=10KHz,VBW =10KHz, Sweep Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=1MHz,VBW=10Hz, Sweep Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of «Note». If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “*” marked in AVG Mode column of Interference Voltage Measured.
- (3) Measuring frequency range from 150KHz to 30MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not how in table.

Table 4 Conducted Emission Data

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

Bluetooth PAN

The following table lists worst case data from TX / RX with various bit-rates on various channels.

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limits(dBuV)		Safe (dBuV)	Margins Note
		QP-Mode	AV-Mode	QP-Mode	AV-Mode		
0.23	Line	42.57	*	62.45	52.45	-19.88	(QP)
0.34	Line	37.66	*	59.23	49.23	-21.57	(QP)
0.45	Line	35.23	*	56.80	46.80	-21.57	(QP)
1.86	Line	35.24	*	56.00	46.00	-20.76	(QP)
3.96	Line	35.39	*	56.00	46.00	-20.61	(QP)
7.94	Line	33.15	*	60.00	50.00	-26.85	(QP)
0.23	Neutral	41.74	*	62.49	37.40	-20.75	(QP)
0.51	Neutral	34.83	*	56.00	46.00	-21.17	(QP)
0.85	Neutral	36.53	*	56.00	46.00	-19.47	(QP)
1.74	Neutral	34.92	*	56.00	46.00	-21.08	(QP)
3.96	Neutral	36.30	*	56.00	46.00	-19.70	(QP)
5.305	Neutral	33.02	*	60.00	50.00	-26.98	(QP)

Remark

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector RBW=9KHz ; SPA setting in RBW=10KHz,VBW =10KHz, Sweep Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=1MHz,VBW=10Hz, Sweep Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.
- (3) Measuring frequency range from 150KHz to 30MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not how in table.

Table 5 Radiated Emission Data (30-24000MHz)

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

802.11b WLAN

The following table lists worst case data from TX / RX with various bit-rates on various channels.

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Safe Margins (dBuV/m)	Note
100.720	V	51.40	- 13.83	37.57	43.50	-	5.93
147.470	V	50.40	- 10.27	40.13	43.50	-	3.37
166.510	V	50.68	- 10.62	40.06	43.50	-	3.44
226.400	V	53.18	- 12.91	40.27	46.00	-	5.73
605.600	V	45.41	- 3.36	42.05	46.00	-	3.95
632.000	V	42.80	- 2.95	39.85	46.00	-	6.15
99.870	H	50.40	- 13.99	36.41	43.50	-	7.09
147.810	H	47.24	- 10.30	36.94	43.50	-	6.56
216.000	H	53.60	- 13.36	40.24	46.00	-	5.76
360.800	H	49.23	- 8.88	40.35	46.00	-	5.65
383.200	H	50.50	- 8.60	41.90	46.00	-	4.10
864.800	H	36.60	1.51	38.11	46.00	-	7.89

Freq. (MHz)	Ant.Pol. (H/V)	Peak Reading (dBuV)	AV Reading (dBuV)	Ant./CF CF(dB)	Peak Act. (dBuV/m)	AV (dBuV/m)	Peak Limit (dBuV/m)	AV (dBuV/m)	NOTE
1460.0	H	54.57	-	-18.90	35.67	-	74.00	54.00	
2068.0	H	55.94	-	-16.82	39.12	-	74.00	54.00	
4016.0	V	52.51	-	-13.52	38.99	-	74.00	54.00	

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of „Note „ . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. “F” denotes fundamental frequency; “ H” denotes spurious frequency. “E” denotes band edge frequency.
- (4) Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode or QP detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Table 5 Radiated Emission Data (30-24000MHz)

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

Bluetooth PAN

The following table lists worst case data from TX / RX with various bit-rates on various channels.

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Safe Margins (dBuV/m)	Note
100.210	V	54.31	- 13.99	40.32	43.50	-	3.18
147.470	V	51.31	- 10.30	41.01	43.50	-	2.49
166.510	V	51.20	- 10.57	40.63	43.50	-	2.87
228.800	V	55.80	- 12.82	42.98	46.00	-	3.02
603.200	V	43.60	- 3.38	40.22	46.00	-	5.78
629.600	V	42.48	- 2.95	39.53	46.00	-	6.47
99.870	H	54.40	- 13.99	40.41	43.50	-	3.09
147.470	H	51.00	- 10.30	40.70	43.50	-	2.80
159.880	H	47.20	- 10.09	37.11	43.50	-	6.39
166.510	H	51.00	- 10.57	40.43	43.50	-	3.07
216.000	H	53.80	- 13.36	40.44	46.00	-	5.56
602.400	H	45.00	- 3.38	41.62	46.00	-	4.38

Freq. (MHz)	Ant.Pol. (H/V)	Peak	AV	Ant./CF	Peak	AV	Peak	AV	Limit
		Reading (dBuV)	(dBuV)		Act.	(dBuV/m)	(dBuV/m)	(dBuV/m)	
1912.0	V	54.06	-	-18.39	35.67	-	74.00	54.00	
3612.0	H	52.33	-	-14.18	38.15	-	74.00	54.00	
2070.0	V	55.02	-	-16.82	38.20	-	74.00	54.00	

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of "Note". Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; " H" denotes spurious frequency. "E" denotes band edge frequency.
- (4) Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode or QP detector mode of the emission .
- (5) Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Table 5 Radiated Emission Data (above 1000MHz)

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

The following table lists worst case data from TX / RX with various orthogonal planes on the EUT antenna.

802.11b WLAN : CH1(2412MHz)

Freq. (MHz)	Ant.Pol. (H/V)	Peak	AV	Ant./CF CF(dB)	Peak	AV	Peak	AV	Limit	NOTE
		Reading (dBuV)	(dBuV)		Act. (dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)		
4824.2	V	45.26	-	-11.71	33.55	-	74.00	54.00	X/H	
7236.3	V	44.70	-	- 6.64	38.06	-	74.00	54.00	X/H	
9648.0	V	45.00	-	- 5.27	39.73	-	74.00	54.00	X/H	
12060.6	V	43.66	-	- 4.54	39.12	-	74.00	54.00	X/H	
14472.3	V	42.69	-	- 2.19	40.50	-	74.00	54.00	X/H	
16884.2	V	45.54	-	- 3.67	41.87	-	74.00	54.00	X/H	
4824.2	H	45.14	-	-11.71	33.43	-	74.00	54.00	X/H	
7236.3	H	44.72	-	- 6.64	38.08	-	74.00	54.00	X/H	
9648.0	H	44.19	-	- 5.27	38.92	-	74.00	54.00	X/H	
12060.6	H	44.37	-	- 4.54	39.83	-	74.00	54.00	X/H	
14472.3	H	43.05	-	- 2.19	40.86	-	74.00	54.00	X/H	
16884.2	H	45.23	-	- 3.67	41.56	-	74.00	54.00	X/H	

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of "Note". Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; " H" denotes spurious frequency. "E" denotes band edge frequency.
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

Table 5 Radiated Emission Data (above 1000MHz)

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

The following table lists worst case data from TX / RX with various orthogonal planes on the EUT antenna.

802.11b WLAN : CH6(2437MHz)

Freq. (MHz)	Ant.Pol. (H/V)	Peak	AV	Ant./CF CF(dB)	Peak	AV	Peak	AV	Limit	NOTE
		Reading (dBuV)	(dBuV)		Act. (dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)		
4874.0	V	44.80	-	-11.7	33.10	-	74.00	54.00	X/H	
7311.0	V	44.47	-	-6.57	37.90	-	74.00	54.00	X/H	
9748.0	V	44.19	-	-5.14	39.05	-	74.00	54.00	X/H	
12185.0	V	43.66	-	-4.56	39.10	-	74.00	54.00	X/H	
14622.0	V	44.42	-	-2.68	41.74	-	74.00	54.00	X/H	
17059.0	V	44.85	-	-3.0	41.82	-	74.00	54.00	X/H	
4874.0	H	45.33	-	-11.7	33.63	-	74.00	54.00	X/H	
7311.0	H	44.29	-	-6.57	37.72	-	74.00	54.00	X/H	
9748.0	H	44.49	-	-5.14	39.35	-	74.00	54.00	X/H	
12185.0	H	44.16	-	-4.56	39.60	-	74.00	54.00	X/H	
14622.0	H	44.16	-	-2.68	41.48	-	74.00	54.00	X/H	
17059.0	H	44.22	-	-3.03	41.19	-	74.00	54.00	X/H	

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; " H" denotes spurious frequency. " E" denotes band edge frequency.
- (This judgment method include the Band Edge Requirement.)**
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
" X" - denotes Laid on Table ; " Y" - denotes Vertical Stand ; " Z" - denotes Side Stand

Table 5 Radiated Emission Data (above 1000MHz)

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

The following table lists worst case data from TX / RX with various orthogonal planes on the EUT antenna.

802.11b WLAN : CH11(2462MHz)

Freq. (MHz)	Ant.Pol. (H/V)	Peak	AV	Ant./CF CF(dB)	Peak	AV	Peak	AV	Limit	NOTE
		Reading (dBuV)	(dBuV)		Act. (dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)		
4924.0	V	45.51	-	-11.63	33.88	-	74.00	54.00	X/H	
7386.0	V	43.99	-	-6.46	37.53	-	74.00	54.00	X/H	
9848.0	V	44.55	-	-5.12	39.43	-	74.00	54.00	X/H	
12310.0	V	43.40	-	-4.59	38.81	-	74.00	54.00	X/H	
14772.0	V	43.89	-	-3.27	40.62	-	74.00	54.00	X/H	
17234.0	V	44.38	-	-2.38	42.00	-	74.00	54.00	X/H	
4924.0	H	45.79	-	-11.63	34.16	-	74.00	54.00	X/H	
7386.0	H	43.89	-	-6.46	37.43	-	74.00	54.00	X/H	
9848.0	H	44.14	-	-5.12	39.02	-	74.00	54.00	X/H	
12310.0	H	43.71	-	-4.59	39.12	-	74.00	54.00	X/H	
14772.0	H	43.43	-	-3.27	40.16	-	74.00	54.00	X/H	
17234.0	H	44.14	-	-2.38	41.76	-	74.00	54.00	X/H	

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; " H" denotes spurious frequency. " E" denotes band edge frequency.
- (This judgment method include the Band Edge Requirement.)**
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
" X" - denotes Laid on Table ; " Y" - denotes Vertical Stand ; " Z" - denotes Side Stand

Table 5 Radiated Emission Data (above 1000MHz)

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

The following table lists worst case data from TX / RX with various orthogonal planes on the EUT antenna.

Bluetooth PAN : CH1(2402MHz)

Freq. (MHz)	Ant.Pol. (H/V)	Peak	AV	Ant./CF CF(dB)	Peak	AV	Peak	AV	Limit	NOTE
		Reading (dBuV)	Reading (dBuV)		Act. (dBuV/m)	Act. (dBuV/m)	(dBuV/m)	(dBuV/m)		
4804.0	V	32.89	-	-11.72	21.17	-	74.00	54.00	X/H	
7206.0	V	31.49	-	-6.72	24.77	-	74.00	54.00	X/H	
9608.0	V	32.28	-	-5.32	26.96	-	74.00	54.00	X/H	
12010.0	V	31.09	-	-4.54	26.55	-	74.00	54.00	X/H	
14412.0	V	29.54	-	-2.08	27.46	-	74.00	54.00	X/H	
16814.0	V	34.24	-	-3.89	30.35	-	74.00	54.00	X/H	
4804.0	H	34.89	-	-11.72	23.17	-	74.00	54.00	X/H	
7206.0	H	34.49	-	-6.72	27.77	-	74.00	54.00	X/H	
9608.0	H	35.41	-	-5.32	30.09	-	74.00	54.00	X/H	
12010.0	H	35.09	-	-4.54	30.55	-	74.00	54.00	X/H	
14412.0	H	33.54	-	-2.08	31.46	-	74.00	54.00	X/H	
16814.0	H	35.24	-	-3.89	31.35	-	74.00	54.00	X/H	

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; " H" denotes spurious frequency. " E" denotes band edge frequency.
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
" X" - denotes Laid on Table ; " Y" - denotes Vertical Stand ; " Z" - denotes Side Stand

Table 5 Radiated Emission Data (above 1000MHz)

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

The following table lists worst case data from TX / RX with various orthogonal planes on the EUT antenna.

Bluetooth PAN : CH40(2441MHz)

Freq. (MHz)	Ant.Pol. (H/V)	Peak	AV	Ant./CF CF(dB)	Peak	AV	Peak	AV	Limit	NOTE
		Reading (dBuV)	(dBuV)		Act.	(dBuV/m)	(dBuV/m)			
4882.0	V	32.71	-	-11.7	21.01	-	74.00	54.00	X/H	
7323.0	V	30.87	-	-6.53	24.34	-	74.00	54.00	X/H	
9764.0	V	31.57	-	-5.14	26.43	-	74.00	54.00	X/H	
12205.0	V	30.68	-	-4.59	26.09	-	74.00	54.00	X/H	
14646.0	V	30.55	-	-2.71	27.84	-	74.00	54.00	X/H	
17087.0	V	32.69	-	-2.82	29.87	-	74.00	54.00	X/H	
4882.0	H	34.71	-	-11.7	23.01	-	74.00	54.00	X/H	
7323.0	H	33.91	-	-6.53	27.38	-	74.00	54.00	X/H	
9764.0	H	35.61	-	-5.14	30.47	-	74.00	54.00	X/H	
12205.0	H	34.68	-	-4.59	30.09	-	74.00	54.00	X/H	
14646.0	H	34.55	-	-2.71	31.84	-	74.00	54.00	X/H	
17087.0	H	33.69	-	-2.82	30.87	-	74.00	54.00	X/H	

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of „Note „ . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. “F” denotes fundamental frequency; “ H” denotes spurious frequency. “ E” denotes band edge frequency.
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (This judgment method include the Band Edge Requirement.)**
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“ X” - denotes Laid on Table ; “ Y” - denotes Vertical Stand ; “ Z” - denotes Side Stand

Table 5 Radiated Emission Data (above 1000MHz)

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

The following table lists worst case data from TX / RX with various orthogonal planes on the EUT antenna.

Bluetooth PAN : CH79(2480MHz)

Freq. (MHz)	Ant.Pol. (H/V)	Peak	AV	Ant./CF CF(dB)	Peak	AV	Peak	AV	Limit	NOTE
		Reading (dBuV)	Reading (dBuV)		Act.	(dBuV/m)	(dBuV/m)	(dBuV/m)		
4960.0	V	33.42	-	-11.49	21.93	-	74.00	54.00	X/H	
7440.0	V	31.39	-	-6.53	24.86	-	74.00	54.00	X/H	
9920.0	V	31.06	-	-5.15	25.91	-	74.00	54.00	X/H	
12400.0	V	30.86	-	-4.60	26.26	-	74.00	54.00	X/H	
14880.0	V	29.97	-	-3.65	26.32	-	74.00	54.00	X/H	
17360.0	V	33.17	-	-1.95	31.22	-	74.00	54.00	X/H	
4960.0	H	35.42	-	-11.49	23.93	-	74.00	54.00	X/H	
7440.0	H	34.39	-	-6.53	27.86	-	74.00	54.00	X/H	
9920.0	H	34.06	-	-5.15	28.91	-	74.00	54.00	X/H	
12400.0	H	34.86	-	-4.60	30.26	-	74.00	54.00	X/H	
14880.0	H	33.97	-	-3.65	30.32	-	74.00	54.00	X/H	
17360.0	H	34.17	-	-1.95	32.22	-	74.00	54.00	X/H	

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of "Note". Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; " H" denotes spurious frequency. "E" denotes band edge frequency.
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (This judgment method include the Band Edge Requirement.)**
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

Table 5 Radiated Emission Data (Restricted Bands Requirements)

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

The emission of the carrier radiated field strength is measured for channel 1 and channel 11 (Peak and AV) as following: (for 802.11 b)

1. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH 11). Then the field strength was measured at 2483.5-2500 MHz.
2. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH 01). Then the field strength was measured at 2310-2390 MHz.

Please refer to the attachment M about the Restricted Bands emission plot.

Freq. (MHz)	Ant.Pol. (H/V)	Peak	AV	Ant./CF CF(dB)	Peak	AV	Peak	AV	Limit	NOTE
		Reading (dBuV)	Reading (dBuV)		Act. (dBuV/m)	Act. (dBuV/m)	(dBuV/m)	(dBuV/m)		
2386.7	V	49.57	-	-15.81	33.76	-	74.00	54.00		
2498.9	V	48.53	-	-15.99	32.54	-	74.00	54.00		
2387.0	H	50.36	-	-15.81	34.55	-	74.00	54.00		
2497.4	H	48.05	-	-15.99	32.06	-	74.00	54.00		

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (3) EUT Orthogonal Axes :

“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand

Table 5 Radiated Emission Data (Restricted Bands Requirements)

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

The emission of the carrier radiated field strength is measured for channel 1 and channel 79 (Peak and AV) as following: (for bluetooth)

1. The transmitter was configured with the worst case antenna and setup to transmit at the highest channel (CH 79). Then the field strength was measured at 2483.5-2500 MHz.
2. The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel (CH 01). Then the field strength was measured at 2310-2390 MHz.

Please refer to the attachment M about the Restricted Bands emission plot.

Freq. (MHz)	Ant.Pol. (H/V)	Peak	AV	Ant./CF CF(dB)	Peak	AV	Peak	AV	Limit	NOTE
		Reading (dBuV)	(dBuV)		Act.	(dBuV/m)	(dBuV/m)	(dBuV/m)		
2335.9	V	48.14	-	-15.66	32.48	-	74.00	54.00		
2487.5	V	48.20	-	-16.00	32.20	-	74.00	54.00		
2388.5	H	50.31	-	-15.81	34.50	-	74.00	54.00		
2499.3	H	48.23	-	-15.99	32.24	-	74.00	54.00		

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (3) EUT Orthogonal Axes :

“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand


4. Hopping Channel Carrier Frequency Separated

4.1 Applied Standard / limit

FCC Part15 (15.247) , Subpart C (for bluetooth device)				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)	Hopping Channel Carrier Frequency Separated	>= 25KHz or the 20dB bandwidth of the hopping channel	2400-2483.5	PASS

4.2 Test Setup

(1) EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
 (2) Spectrum Setting : RBW= 100KHz, VBW=100KHz,Sweep time = 200 ms.



4.3 Test Result

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

Please refer to the Attachment "F"

Hopping Channel Carrier Frequency Separated	LIMIT (KHz)
1 MHz	>= 25


5 Number of Hopping Channel

5.1 Applied Standard / limit

FCC Part15 (15.247) , Subpart C (for bluetooth device)		
Section	Test Item	Frequency Range (MHz)
15.247 (a)(1)(ii)	Number of Hopping Channel	2400-2483.5

5.2 Test Setup

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- (2) Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.



5.3 Test Result

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

Please refer to the Attachment "G"

Number of Hopping Channel	79
---------------------------	----


6 Average Time of Occupancy

6.1 Applied Standard / limit

FCC Part15 (15.247) , Subpart C (for bluetooth device)				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)(ii)	Average Time of Occupancy	< = 0.4 sec (a 30 second period)	2400-2483.5	PASS

6.2 Test Setup

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- (2) Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.



6.3 Test Result

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

Please refer to the Attachment "H"

The EUT total hops / second (1)	1600 times
Total channel (2)	79
each channel hops/second (3)=(1)/(2)	20.25 times
each channel hops in 30 second (4)=30 x(3)	607.5 times
Average time of signal channel occupancy (5)	0.44ms(see plot below)
Average Time of Occupancy (6)=(4) x (5)	0.27 second
LIMIT(second)	<= 0.4 second

7 Bandwidth

7.1 Applied Standard / limit

FCC Part15 (15.247) , Subpart C (for bluetooth device)				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)(ii)	Bandwidth	<= 1MHz (20dB bandwidth)	2400-2483.5	PASS
FCC Part15 (15.247) , Subpart C (for 802.11b device)				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

7.2 Test Setup

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- (2) Spectrum Setting : RBW= 10KHz, VBW=30KHz, Sweep time = 200 ms.



7.3 Test Result

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

Please refer to the Attachment "I"

Bluetooth PAN			
CH	CH Frequency (MHz)	Bandwidth (KHz)	LIMIT (MHz)
1	2402	786.6	<= 1
40	2441	770.0	<= 1
79	2480	823.3	<= 1

802.11b WLAN			
CH	CH Frequency (MHz)	Bandwidth (MHz)	LIMIT (MHz)
1	2412	12.33	>= 500KHz
6	2437	12.75	>= 500KHz
11	2462	13.33	>= 500KHz

8 Peak Output Power

8.1 Applied Standard / limit

FCC Part15 (15.247) , Subpart C (for bluetooth device)				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (b)(1)	Peak Output Power	1 watt or 30dBm (at least 75 hopping channel)	2400-2483.5	PASS
FCC Part15 (15.247) , Subpart C (for 802.11b device)				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (b)(1)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 Test Setup

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- (2) Spectrum Setting : RBW= 3MHz, VBW= 3MHz, Sweep time = 200 ms.



8.3 Test Result

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)
Please refer to the Attachment "J"

Bluetooth PAN				
CH	CH Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
1	2402	-1.17	30	1
40	2441	-0.51	30	1
79	2480	0.33	30	1

802.11b WLAN				
CH	CH Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
1	2412	16.83	30	1
6	2437	17.36	30	1
11	2462	16.32	30	1


9 Antenna conducted Spurious Emission

9.1 Applied Standard / limit

FCC Part15 (15.247) , Subpart C (for 802.11b & bluetooth device)				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (c)	Antenna conducted Spurious Emission	20dB less than the peak value of fundamental frequency	30-25000	PASS

9.2 Test Setup

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- (2) Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.



9.3 Test Result

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

Please refer to the Attachment "K"

Bluetooth PAN			
The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2400	-45.89	2438	-34.38
Result			
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band, that contains the highest lever of the desired power.			

802.11b WLAN			
The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2400	-28.14	2438	-33.04
Result			
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band, that contains the highest lever of the desired power.			


10 Power Spectral Density

10.1 Applied Standard / limit

FCC Part15 (15.247) , Subpart C (for 802.11b device)				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (d)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

10.2 Test Setup

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- (2) Spectrum Setting : RBW= 3KHz, VBW= 30KHz, Sweep time = Span/3KHz



10.3 Test Result

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

Please refer to the Attachment "J"

802.11b WLAN				
CH	CH Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
1	2412	-10.8	30	1
6	2437	-12.88	30	1
11	2462	-13.59	30	1

11 RF Exposure

11.1 Applied Standard / limit

Based upon the new TCB exclusion list published by FCC on July 2002	
Frequency Range(MHz)	Limit (mw)
2402-2480	60/f(GHz)
	note: f (GHz) is the mid band frequency of transmitter

11.2 Test Result

Special Notes : (EUT Operation Mode or Test Configuration Mode, if applicable)

Bluetooth PAN					
Peak output power (dBm)	Ant Gain (dBi)	EIRP (1)		LIMIT(2) (mw)	Result
		(dBm)	mW		
0.33	1.2	1.53	1.42	24.5	PASS

802.11b WLAN					
Peak output power (dBm)	Ant Gain (dBi)	EIRP (1)		LIMIT(2) (mw)	Result
		(dBm)	mW		
17.36	2	19.36	86.2	24.5	Note(3)

NOTE:

- (1) EIRP= Peak output power + Ant Gain
- (2) LIMIT=60/2.441(GHz)=24.5(mw)
- (3) This device have to submit the test report of SAR evaluation.

Attachment

Table Contents

- A. Electric Block Diagram
- B. EUT Modification Description
- C. EUT Photos
- D. EUT Test Photos
- E. User' s Manual
- F. Hopping Channel Carrier Frequency Separated
- G. Number of Hopping Channel
- H. Average Time of Occupancy
- I. Bandwidth
- J. Peak Output Power
- K. Antenna conducted Spurious Emission
- L. Power Spectral Density
- M. Restricted Bands Requirements
- N. Product Labeling

Attachment - A.

Electric Block Diagram

Attachment - B.

EUT Modification Description

Attachment - C.

EUT Test Photos

- 1. Conducted Measurement Photos**
- 2. Radiated Measurement Photos**

Attachment – D**EUT Photos**

1. Photo # 1~4 Front View
2. Photo # 5~27 Unit Partially Disassembled
3. Photo # 28 Front View
4. Photo # 29~32 Unit Partially Disassembled
5. Photo # 33 Front View
6. Photo # 34~37 Unit Partially Disassembled
7. Photo # 38 Front View
8. Photo # 39~42 Unit Partially Disassembled
9. Photo # 43 Front View
10. Photo # 44~47 Unit Partially Disassembled
11. Photo # 48 Front View
12. Photo # 49~52 Unit Partially Disassembled
13. Photo # 53~54 Front View
14. Photo # 55~59 Unit Partially Disassembled
15. Photo # 60~62 Front View
16. Photo # 63~64 Unit Partially Disassembled
17. Photo # 65~66 Front View
18. Photo # 67~68 Unit Partially Disassembled

Attachment – E

User's Manual

Attachment - F.

Hopping Channel Carrier Frequency Separated

Attachment – J

Peak Output Power

Attachment - K.

Antenna conducted Spurious Emission

Attachment - N.

Product Labeling