



**FCC CFR47 PART 15 SUBPART C  
CERTIFICATION**

**TEST REPORT**

**FOR**

**802.11 A/B/G RADIO CARD**

**MODEL NUMBER: PRA-0009**

**FCC ID: Q7O-0004**

**REPORT NUMBER: 04U2601-2**

**ISSUE DATE: APRIL 13, 2004**

*Prepared for*  
**KARLNET INC.**  
**525 METRO PLACE N., SUITE 100**  
**DUBLIN, OHIO 43017 USA**

*Prepared by*  
**COMPLIANCE CERTIFICATION SERVICES**  
**561F MONTEREY ROAD,**  
**MORGAN HILL, CA 95037, USA**  
**TEL: (408) 463-0885**  
**FAX: (408) 463-0888**



## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION.....</b>	<b>3</b>
<b>2. EUT DESCRIPTION.....</b>	<b>4</b>
<b>3. TEST METHODOLOGY .....</b>	<b>5</b>
<b>4. FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
<b>5. CALIBRATION AND UNCERTAINTY.....</b>	<b>6</b>
5.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	<i>6</i>
5.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>6</i>
5.3. <i>TEST AND MEASUREMENT EQUIPMENT.....</i>	<i>7</i>
<b>6. SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>8</b>
<b>7. APPLICABLE RULES AND TEST RESULTS .....</b>	<b>10</b>
7.1. <i>6 dB BANDWIDTH.....</i>	<i>10</i>
7.2. <i>99% BANDWIDTH .....</i>	<i>21</i>
7.3. <i>PEAK OUTPUT POWER.....</i>	<i>32</i>
7.4. <i>MAXIMUM PERMISSIBLE EXPOSURE .....</i>	<i>43</i>
7.5. <i>AVERAGE POWER.....</i>	<i>46</i>
7.6. <i>PEAK POWER SPECTRAL DENSITY .....</i>	<i>48</i>
7.7. <i>CONDUCTED SPURIOUS EMISSIONS.....</i>	<i>59</i>
7.8. <i>RADIATED EMISSIONS.....</i>	<i>78</i>
7.8.1. <i>TRANSMITTER RADIATED SPURIOUS EMISSIONS .....</i>	<i>78</i>
7.8.2. <i>TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ .....</i>	<i>81</i>
7.8.3. <i>WORST-CASE RADIATED EMISSIONS BELOW 1 GHz .....</i>	<i>100</i>
7.9. <i>POWERLINE CONDUCTED EMISSIONS .....</i>	<i>104</i>
<b>8. SETUP PHOTOS .....</b>	<b>107</b>

## 1. TEST RESULT CERTIFICATION

**COMPANY NAME:** KARLNET INC.  
525 METRO PLACE N., SUITE 100  
DUBLIN, OHIO 43017 USA

**EUT DESCRIPTION:** 802.11a/b/g radio card

**MODEL:** PRA-0009

**DATE TESTED:** MARCH 22 – 31, 2004

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.


Approved & Released For CCS By:



---

MICHAEL HECKROTTE  
ENGINEERING MANAGER  
COMPLIANCE CERTIFICATION SERVICES

Tested By:



---

FRANK IBRAHIM  
EMC ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

## 2. EUT DESCRIPTION

The EUT is an 802.11a/b/g transceiver radio module. It is intended to be installed in an outdoor base station or an integrated satellite unit.

The transmitter has a maximum peak conducted output power as follows:

Frequency Band (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	16.14	41.11
2412 - 2462	802.11g	16.00	39.81
5785 - 5825	802.11a	17.84	60.81

The radio utilizes the following antennas:

Integrated Panel Antenna, 18 dBi gain in the 2.4 GHz band for Point-to-Multipoint operation.

Patch Antenna, 19 dBi gain in the 2.4GHz band for Point-to-Multipoint operation.

Panel Antenna, 18 dBi gain in the 5.8 GHz band for Point-to-Multipoint operation.

Dish Antenna, 24 dBi gain in the 5.8 GHz band for Point-to-Point operation.

### 3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4/2001, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

### 4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsenmc.com>.



No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.

## 5. CALIBRATION AND UNCERTAINTY

### 5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 5.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

### 5.3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment were utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial NO.	Cal Due
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	8379443	10/13/2004
Site A Line Stabilizer / Conditioner				
LISN, 10 kHz ~ 30 MHz	Tripplite	LC-1800a	A0051681	CNR
Antenna, Horn 1 ~ 18 GHz	FCC	LISN-50/250-25-2	2023	10/13/2004
Preamplifier, 1 ~ 26 GHz	EMCO	3115	6717	2/4/2005
Spectrum Analyzer	Miteq	NSP10023988	646456	4/25/2004
EMI Receiver, 9 kHz ~ 2.9 GHz	Agilent	E4446A	MY43360112	1/13/2005
RF Filter Section	HP	8542E	3942A00286	11/21/2004
Antenna, Horn, 18 ~ 26 GHz	HP	85420E	3705A00256	11/21/2004
Peak Power Meter	ARA	MWH-1826/B	1013	2/4/2005
Peak / Average Power Sensor	Agilent	E4416A	GB41291160	11/7/2004
EMI Test Receiver	Agilent	E9327A	US40440755	11/7/2004
Antenna, Horn 26 ~ 40 GHz	R & S	ESIB40	100192	11/21/2004
30MHz---- 2Ghz	ARA	MWH-2640/B	1029	12/3/2004
Amplifier 26-40 GHz	Sunol Sciences	JB1 Antenna	A121003	12/22/2004
EMI Receiver	Miteq	NSP4000-SP2	924343	6/1/2004
	R & S	ESHS20	827129006	7/17/2004

## 6. SETUP OF EQUIPMENT UNDER TEST

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
PS/2 MOUSE	MITSUMI	ECM-S5002	510418	EW4ECM-S5002
KEYBOARD	KEYTRONICS	E03601QUSASI-C	Q930200775	DoC
MONITOR	SAMSUNG	CSF9839	A3LCSF983	1354
PC	BCOM	5BLMP	ZH2030208	DoC
HUB	D-LINK	DSS-5+	0150C3A36614	DoC
LAPTOP	HP	PAVILION	TW14018223	DoC
POE	PW130RA4800F01	N/A	PA12183	DoC
DC POWER SUPPLY	KARLNET	GT-21089-1948-T3	01259543/03	DoC


### I/O CABLES

TEST I / O CABLES								
Cable No	I/O Port	# of I/O Port	Connector Type	Type of Cable	Cable Length	Data Traffic	Bundled	Remark
1	AC	4	US 115V	Un-shielded	2m	No	No	EUT power cable bundled for LC test
2	Video	1	DB15	Shielded	2m	Yes	Yes	One Torroid on Each End
3	Mouse	1	PS/2	Un-shielded	2m	Yes	No	N/A
4	KB	1	PS/2	Shielded	2m	Yes	No	N/A
5	Network	1	RJ45	Un-shielded	0.5m	Yes	No	N/A
6	Network	1	RJ45	Un-shielded	4m	Yes	No	N/A
7	Network	1	RJ45	Un-shielded	12m	Yes	No	N/A
8	Antenna	1	Coaxial	Shielded	0.5m	Yes	No	N/A

### TEST SETUP

The EUT is connected to a particular transmitting antenna, radio transmitter is controlled by a remote PC via RJ45 cable, POE is used to provide power to the EUT, parameters such as frequency, power and mode are all controlled from a PC using custom made software.

**SETUP DIAGRAM FOR TESTS**

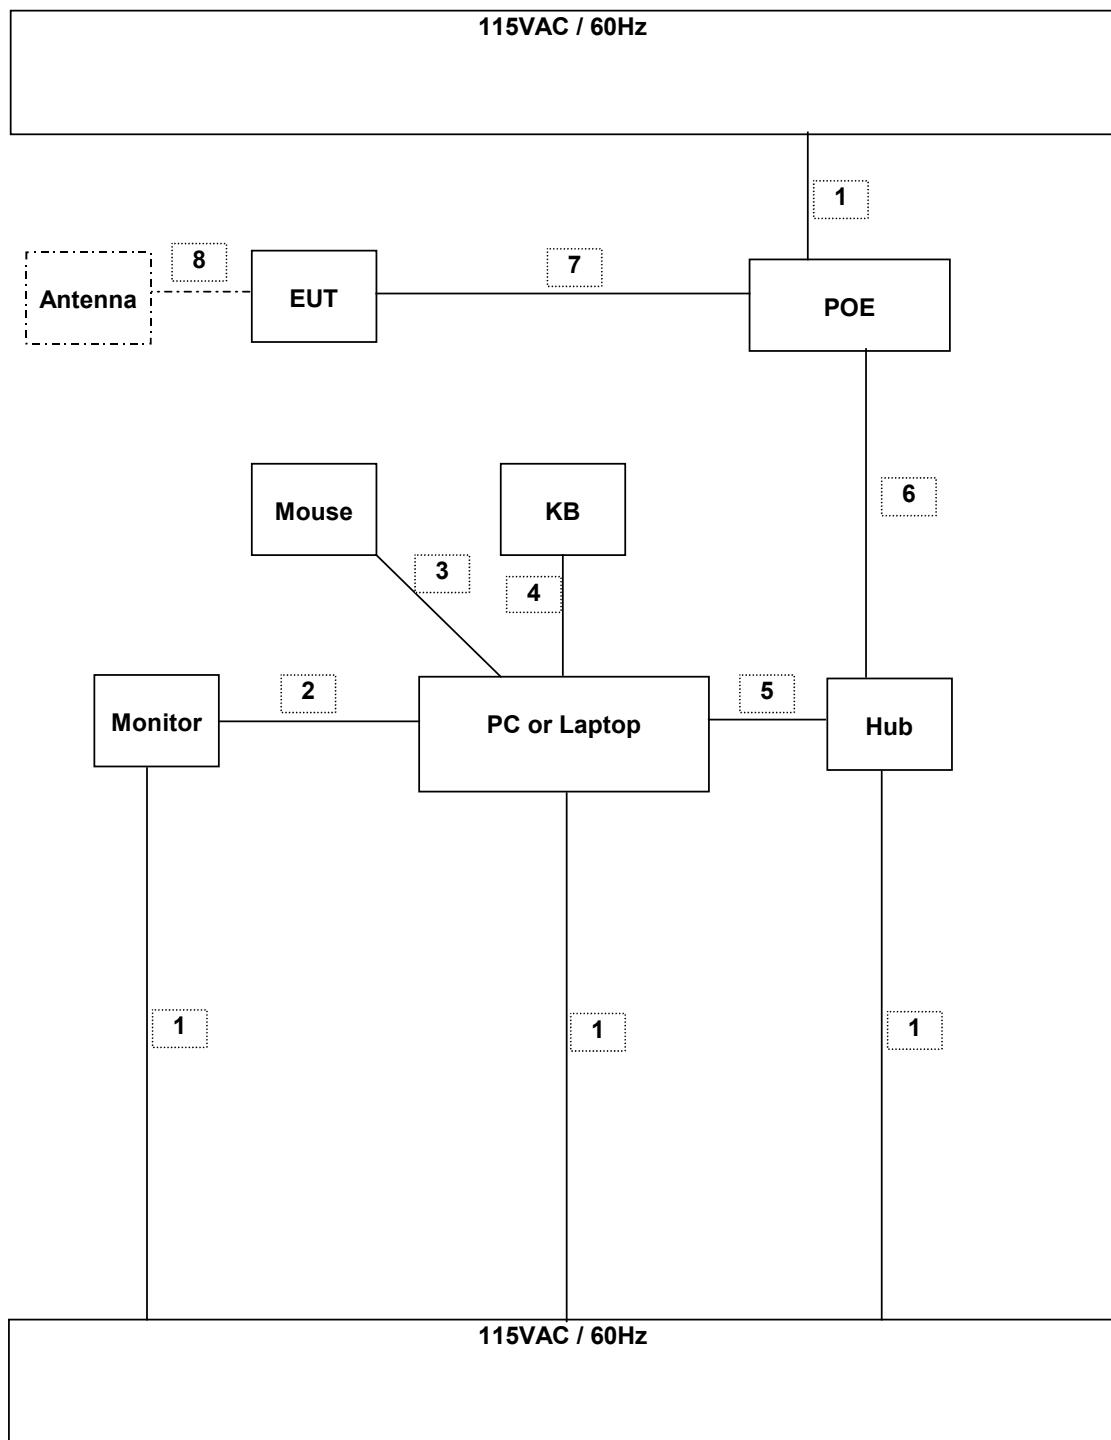

## 7. APPLICABLE RULES AND TEST RESULTS

### 7.1. 6 dB BANDWIDTH

#### LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

#### 2.4 GHz BAND RESULTS

No non-compliance noted:

802.11b Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	12170	500	11670
Middle	2437	12330	500	11830
High	2462	11250	500	10750

802.11g Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2417	16500	500	16000
Middle	2437	16500	500	16000
High	2462	16500	500	16000


### **5.8 GHz BAND RESULTS**


No non-compliance noted:


802.11a Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	5745	16500	500	16000
Middle	5785	16500	500	16000
High	5825	16500	500	16000


**6 DB BANDWIDTH (802.11b MODE)**

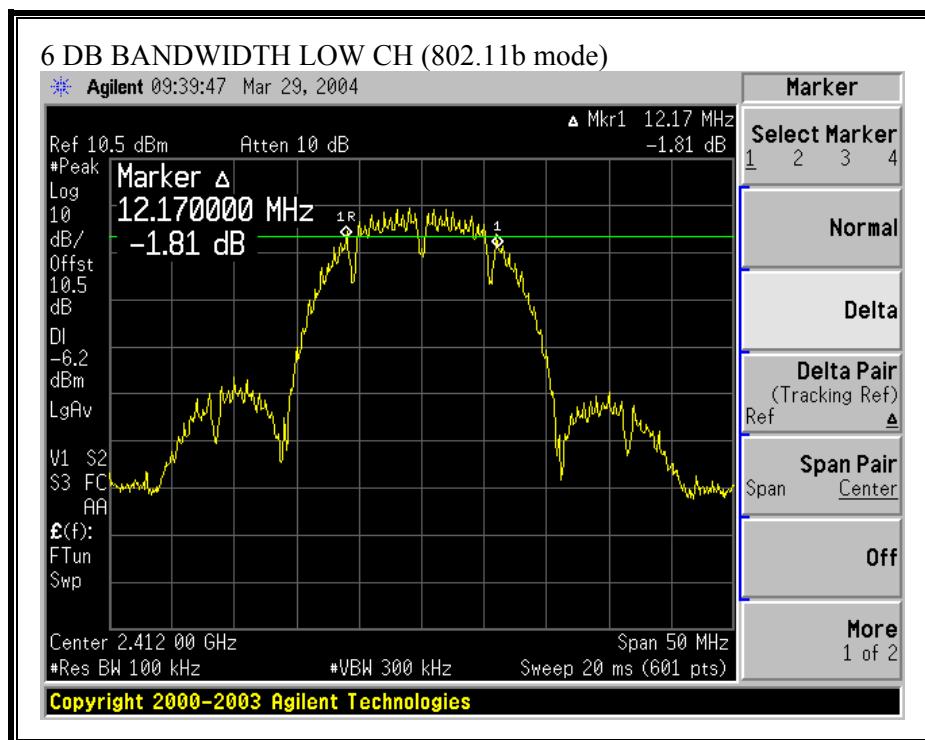


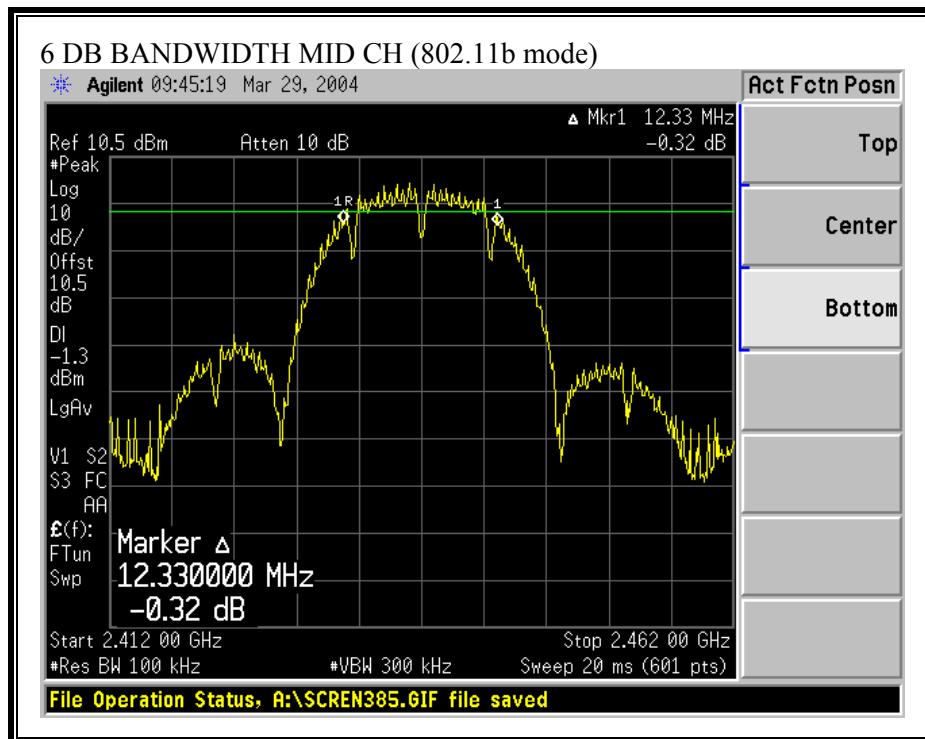


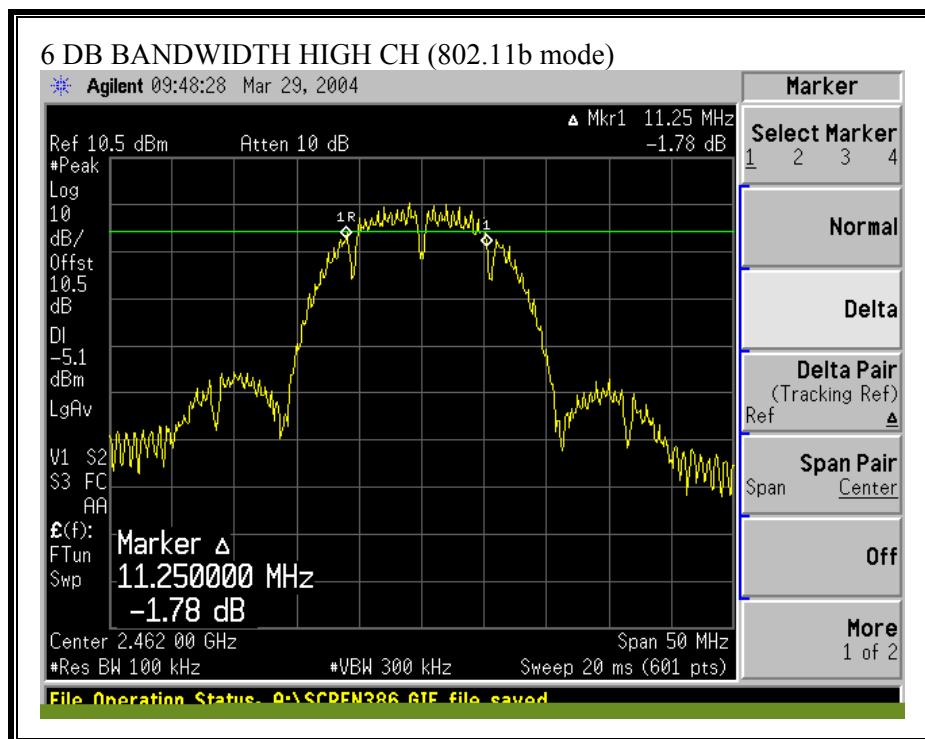


**6 DB BANDWIDTH (802.11g MODE)**

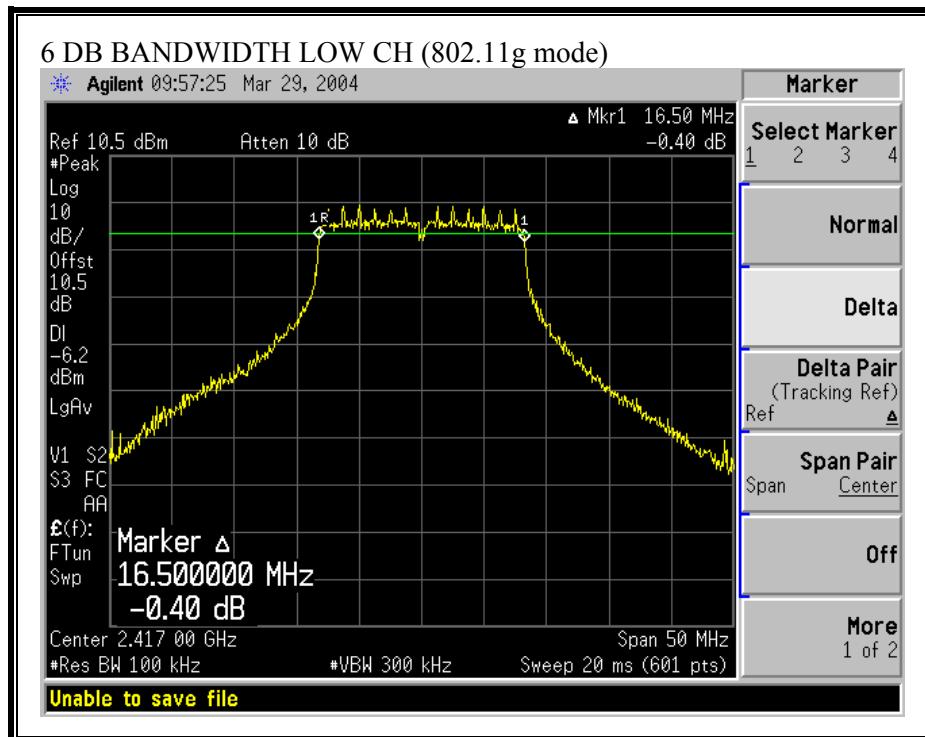


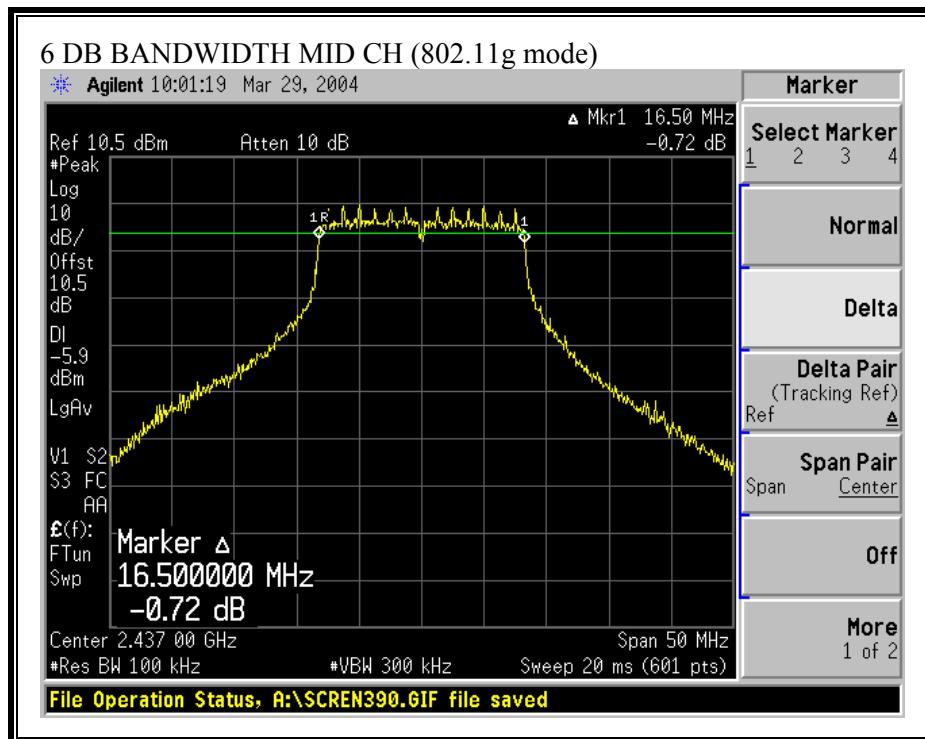


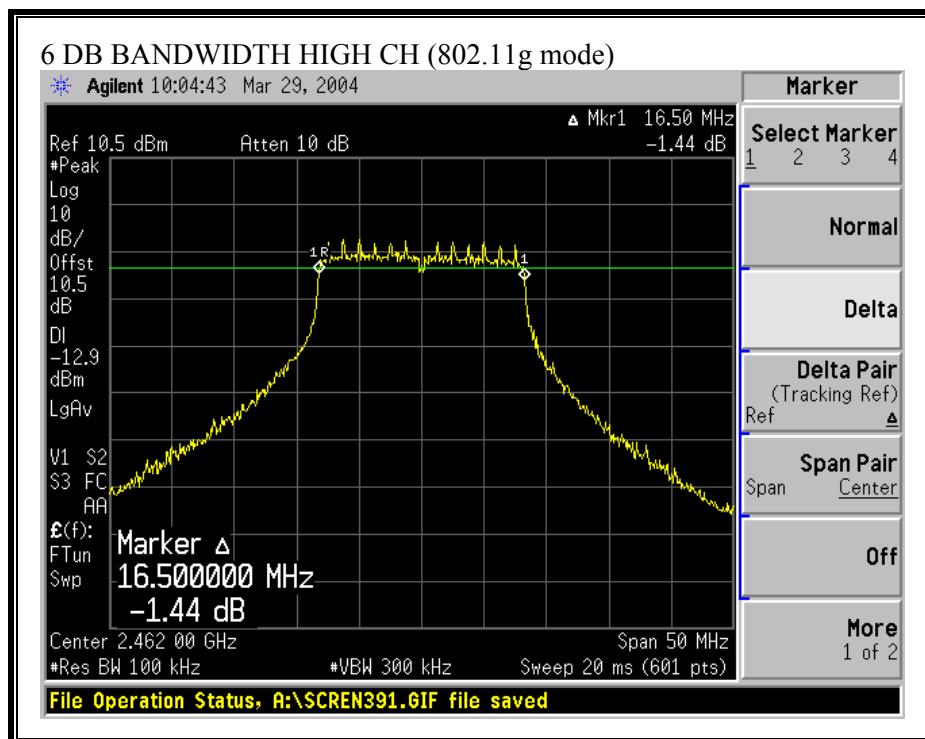

**6 DB BANDWIDTH (802.11a MODE)**

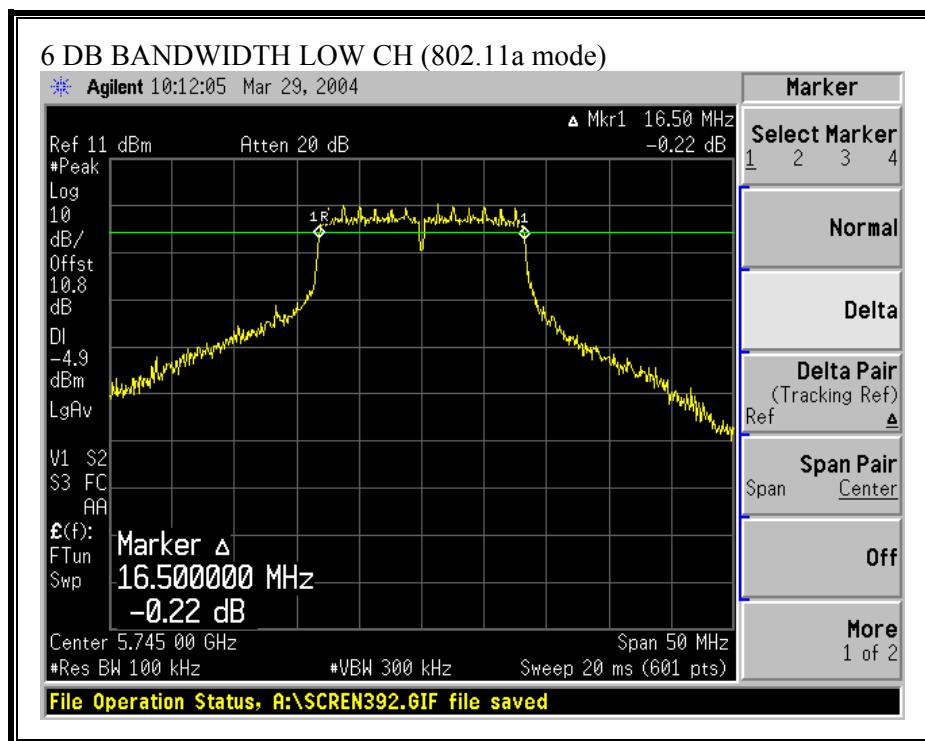

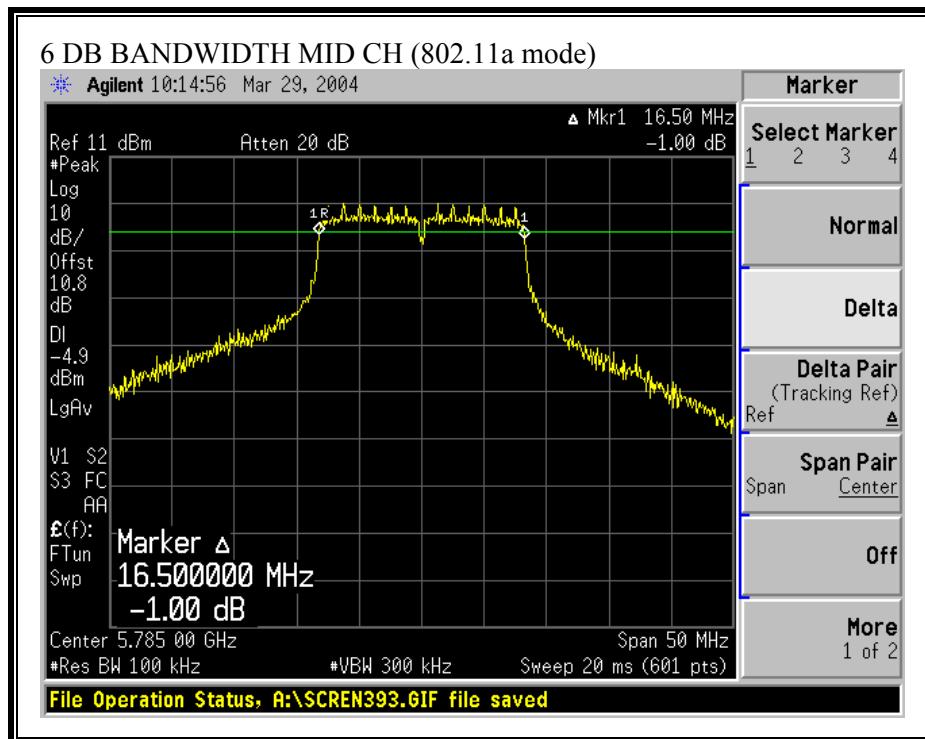

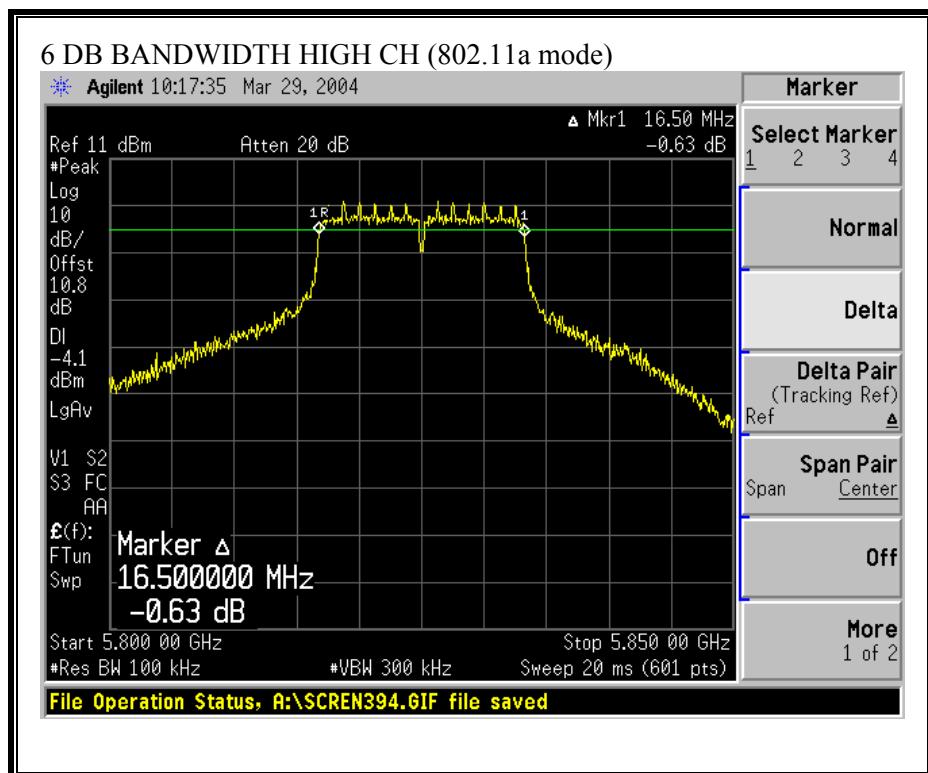

## 7.2. 99% BANDWIDTH

### LIMIT

None; for reporting purposes only.

### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

### 2.4 GHz BAND RESULTS

No non-compliance noted:

802.11b Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	15.4599
Middle	2437	15.4761
High	2462	15.4824

802.11g Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2417	16.4149
Middle	2437	16.4629
High	2462	16.474


### **5.8 GHz BAND RESULTS**


No non-compliance noted:


802.11a Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5745	16.4865
Middle	5785	16.4797
High	5825	16.5088


**99% BANDWIDTH (802.11b MODE)**

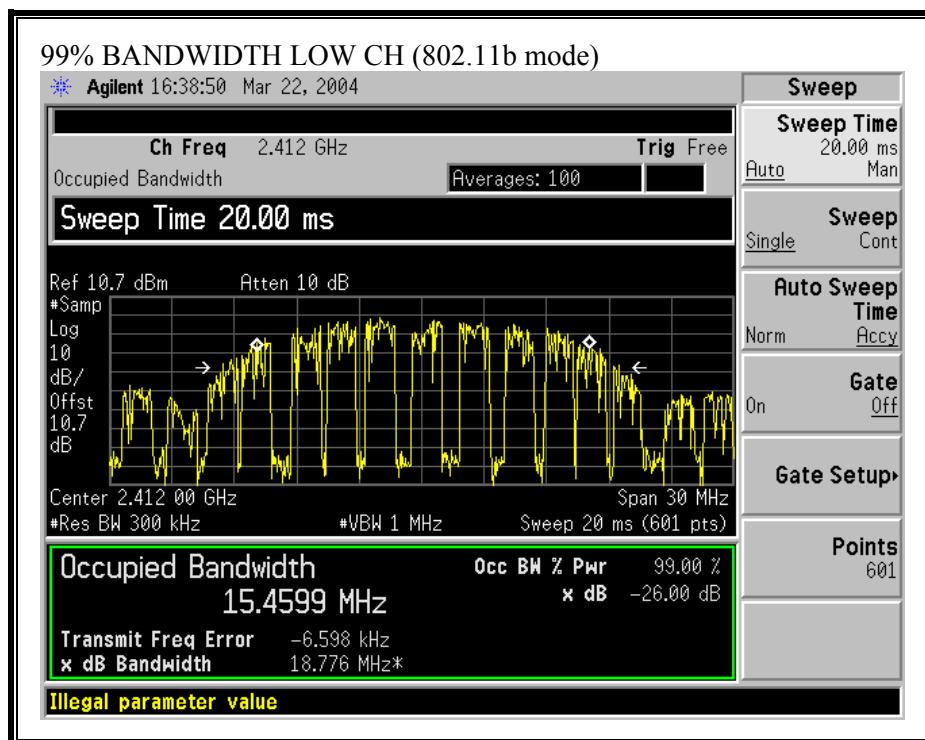


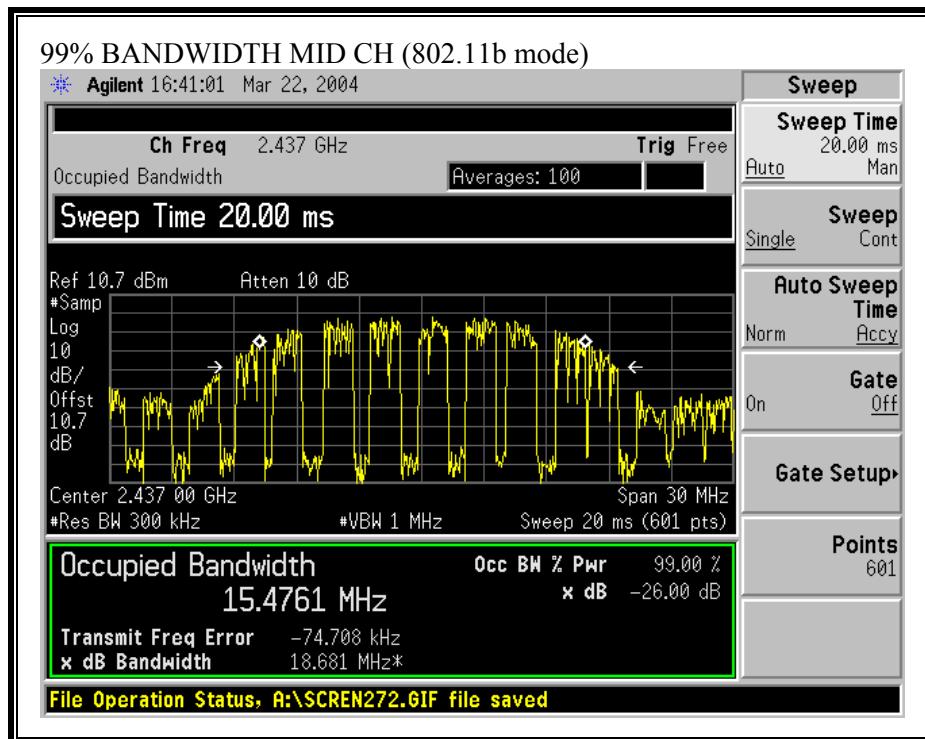


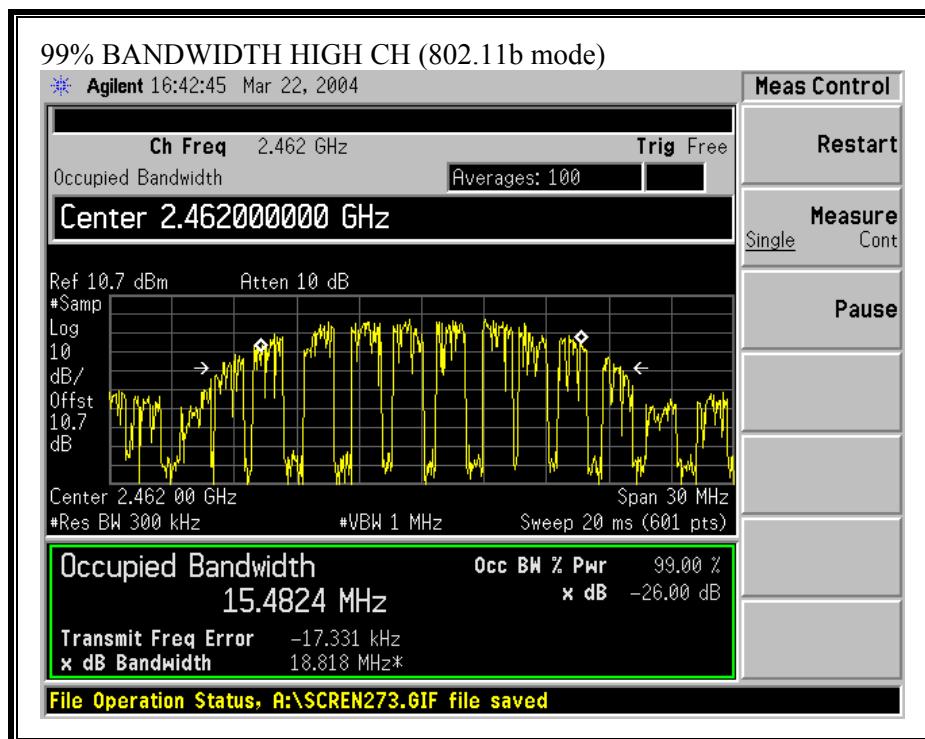


**99% BANDWIDTH (802.11g MODE)**

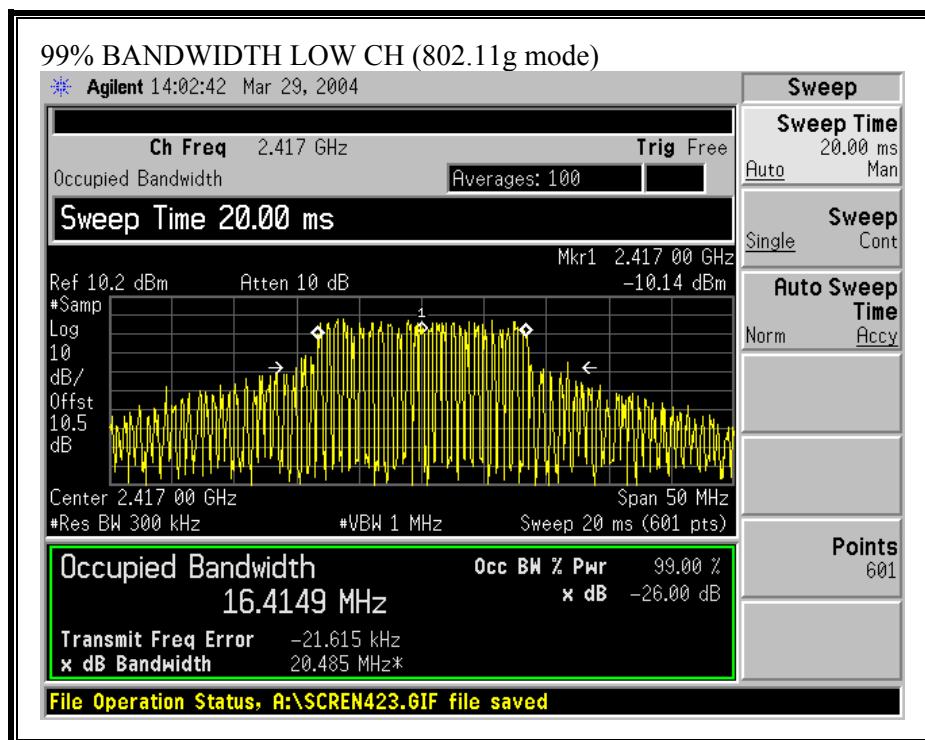


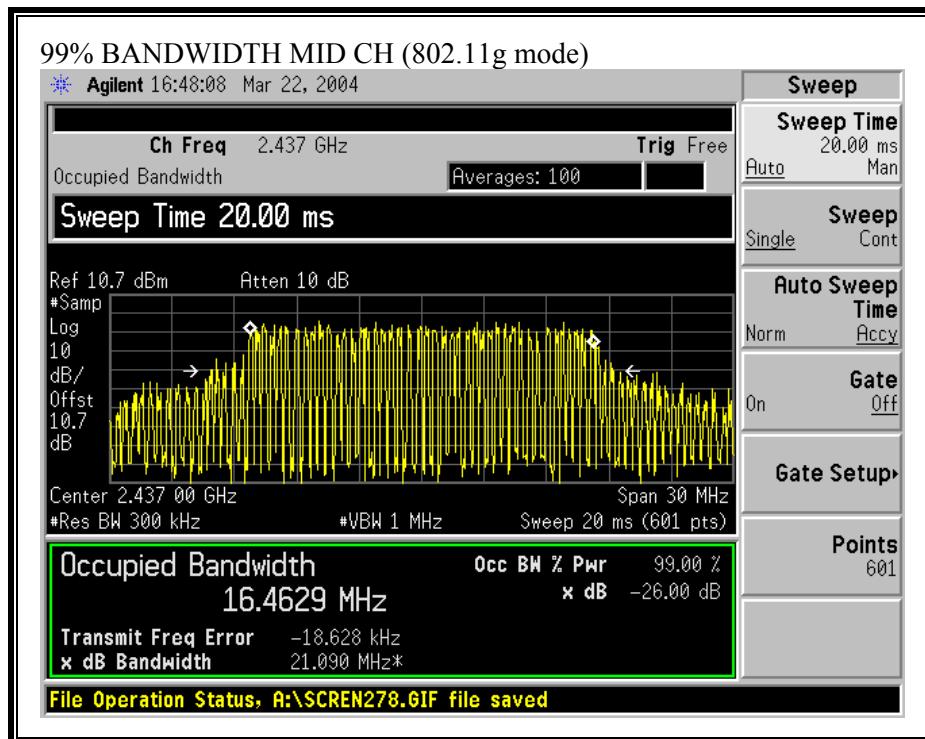


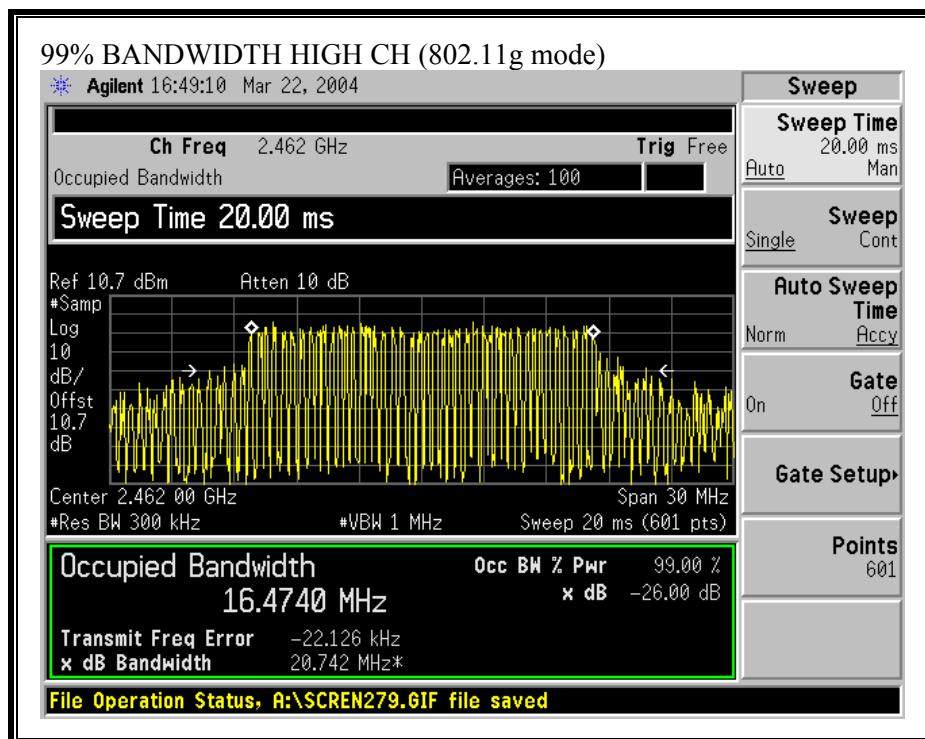

**99% BANDWIDTH (802.11a MODE)**

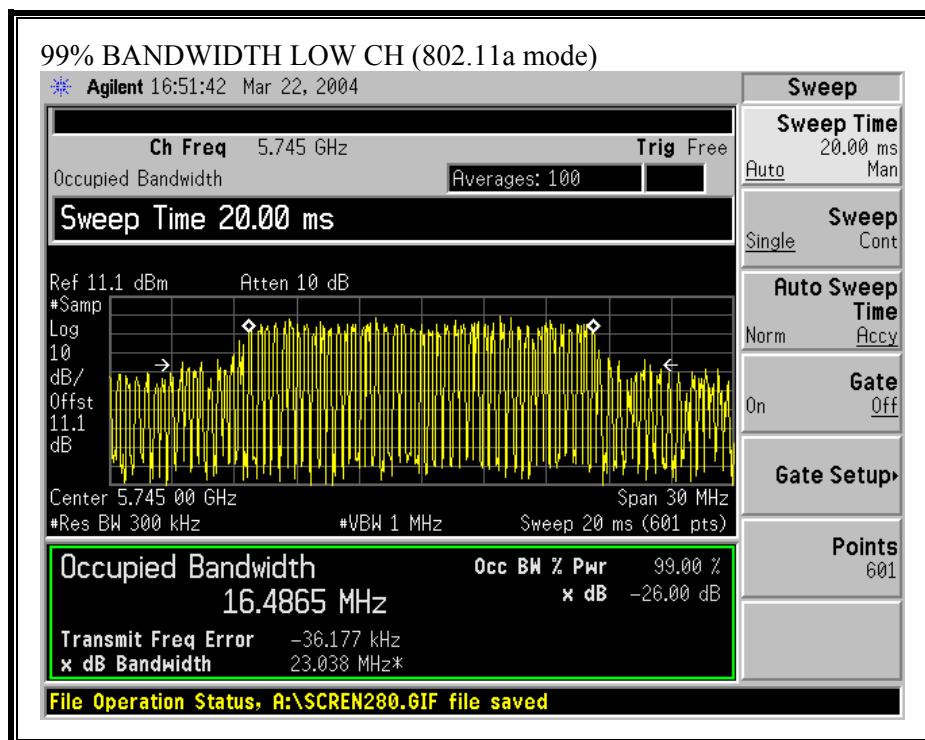

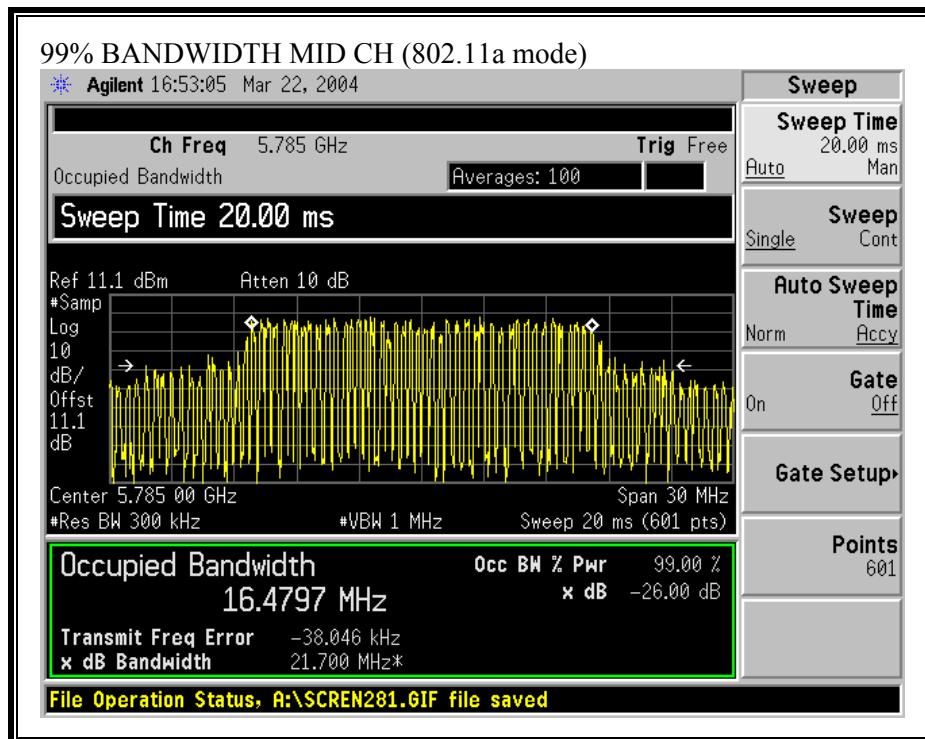

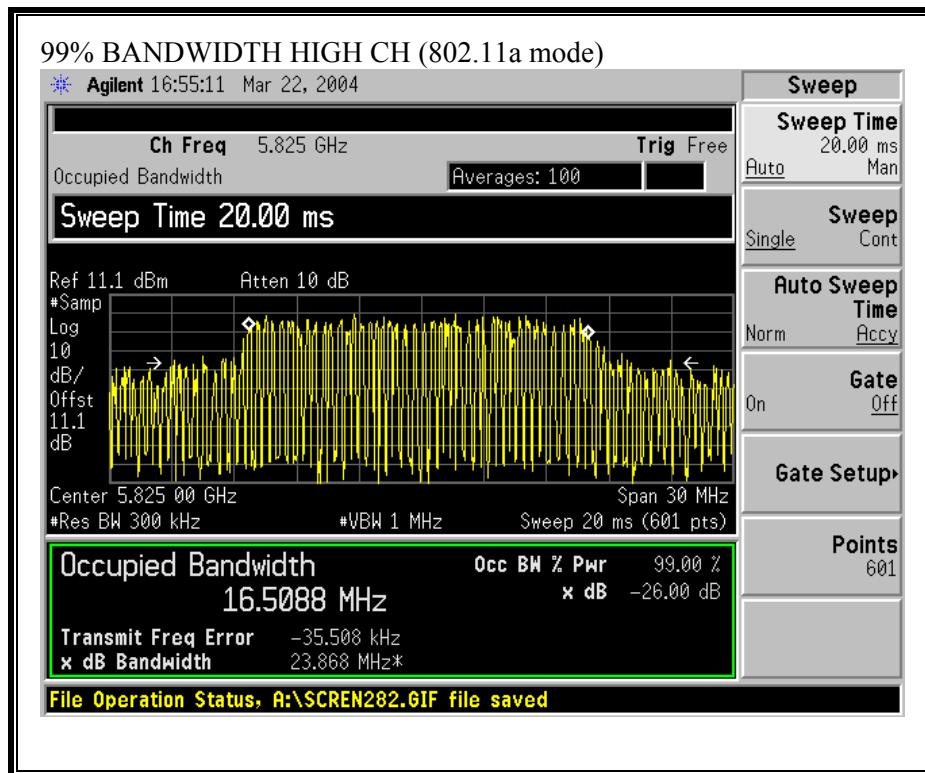

### 7.3. PEAK OUTPUT POWER

#### PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (4) Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum antenna gain for Point-to-Multipoint operation in the 2400-2483.5 MHz band, is 19 dBi, therefore the limit is 17 dBm for this band.

The maximum antenna gain for Point-to-Multipoint operation in the 5725-2850 MHz band, is 18 dBi, therefore the limit is 18 dBm for this band.

The maximum antenna gain for Point-to-Point operation in the 5725-2850 MHz band, is 24 dBi, therefore the limit is 30 dBm for this band and operating mode.

The lower of the two limits in the 5725-2850 MHz band is 18 dBm.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

#### **2.4 GHZ BAND RESULTS**

No non-compliance noted:

802.11b Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	11.65	17	-5.35
Middle	2437	16.14	17	-0.86
High	2462	11.54	17	-5.46

802.11g Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2417	15.52	17	-1.48
Middle	2437	16.00	17	-1.00
High	2462	8.52	17	-8.48


#### **5.8 GHZ BAND RESULTS**


No non-compliance noted:


802.11a Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	5745	17.72	18	-0.28
Middle	5785	17.84	18	-0.16
High	5825	17.60	18	-0.40


**OUTPUT POWER (802.11b MODE)**

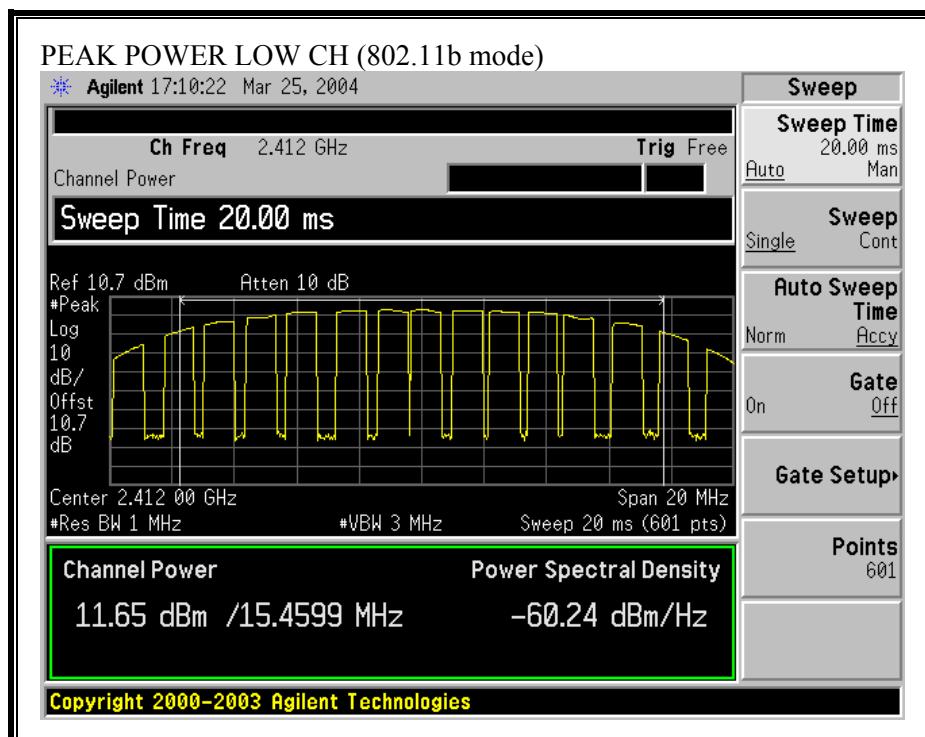


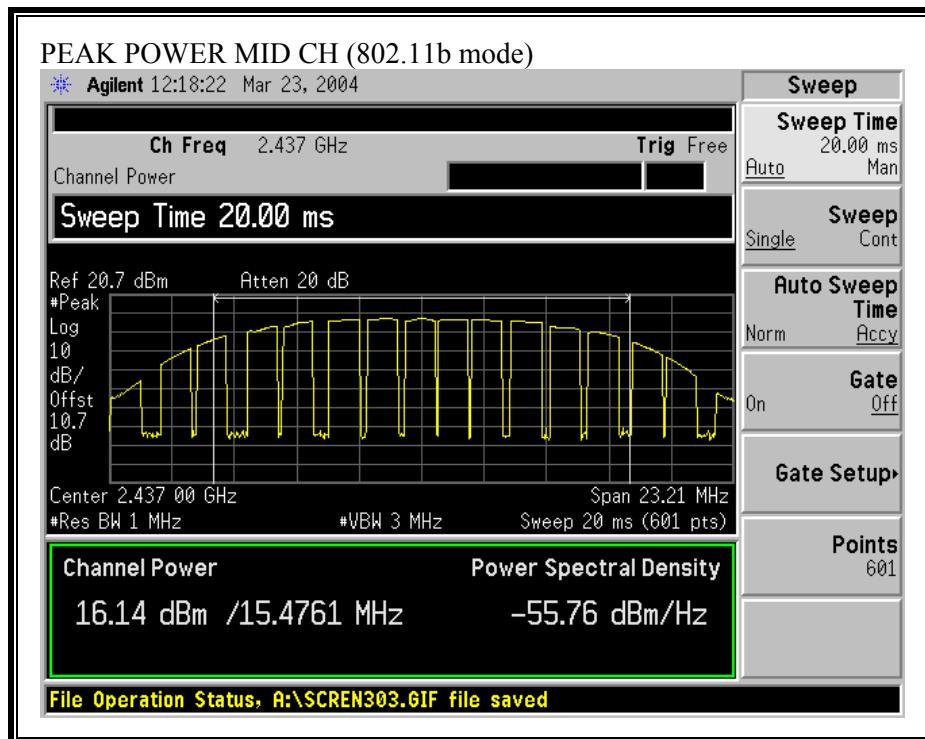


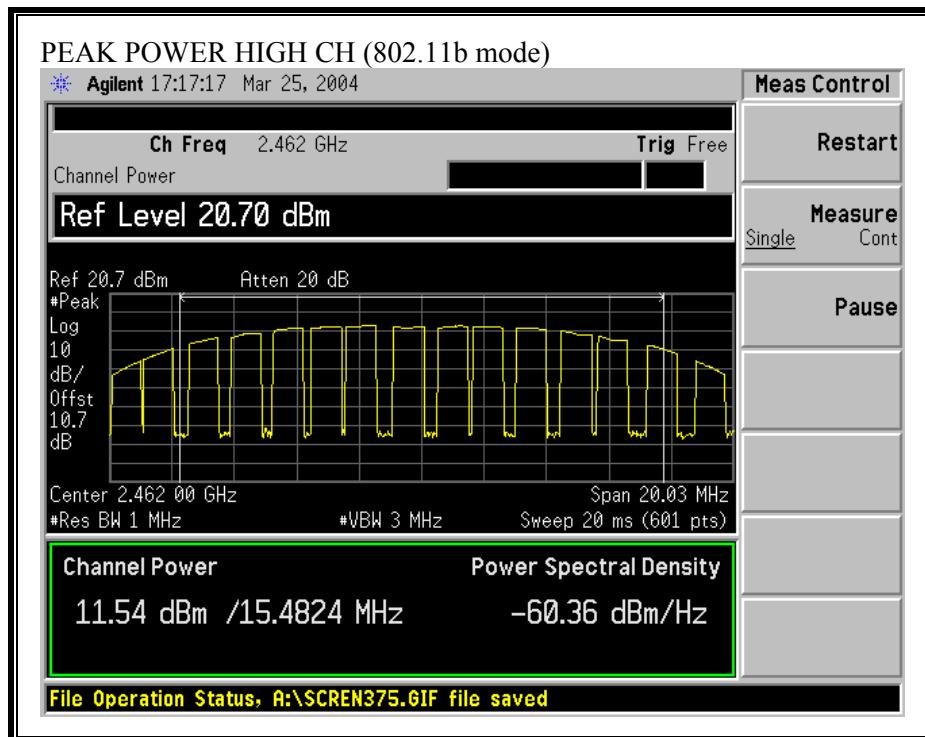


**OUTPUT POWER (802.11g MODE)**

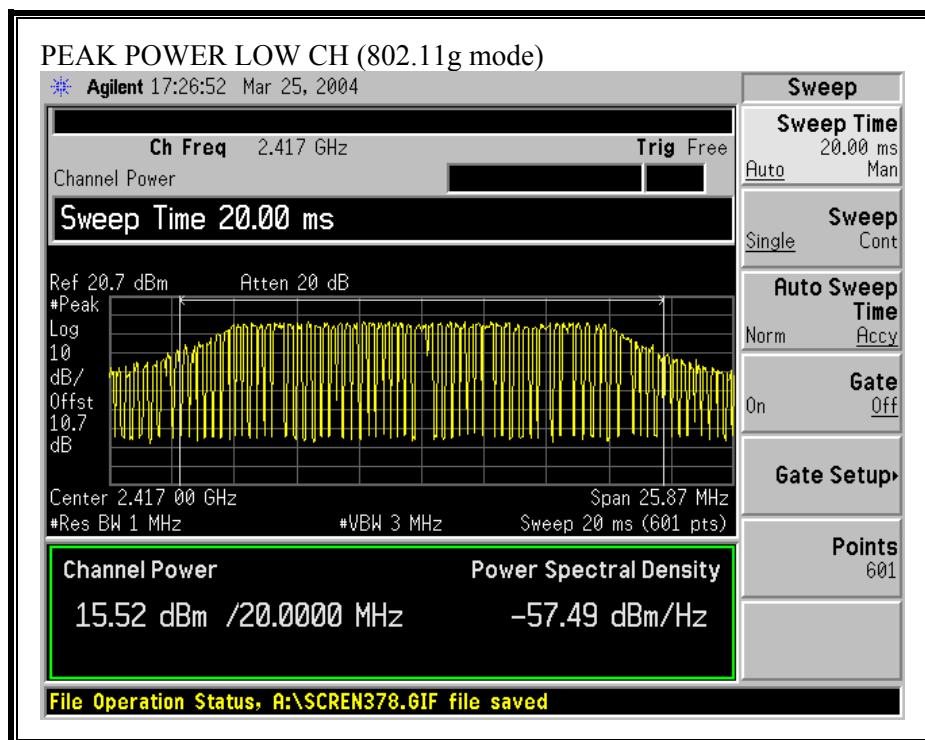


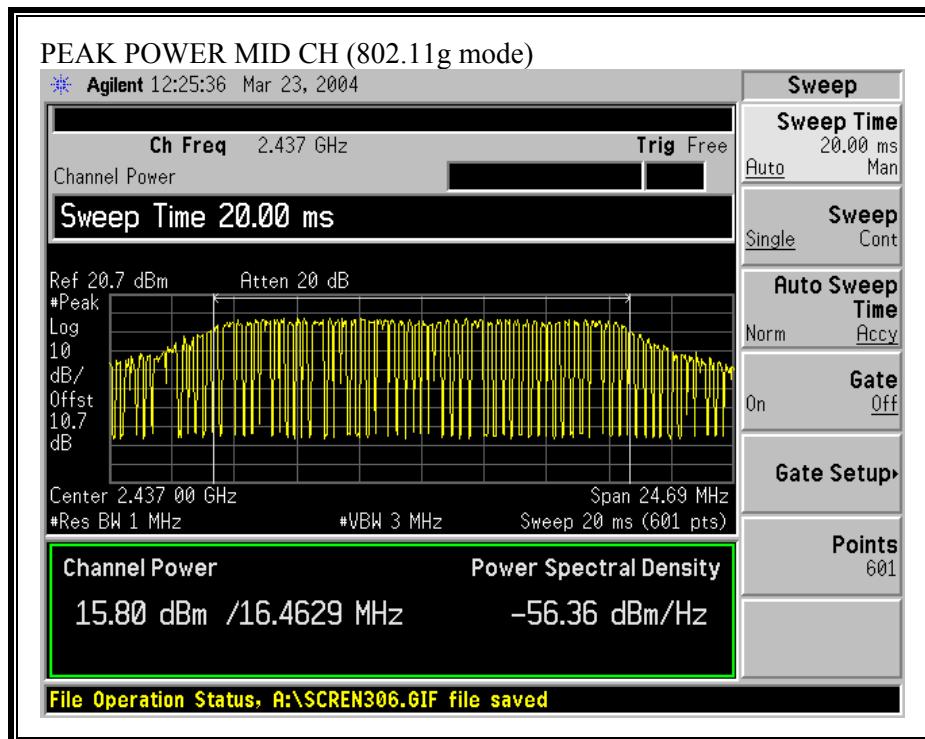


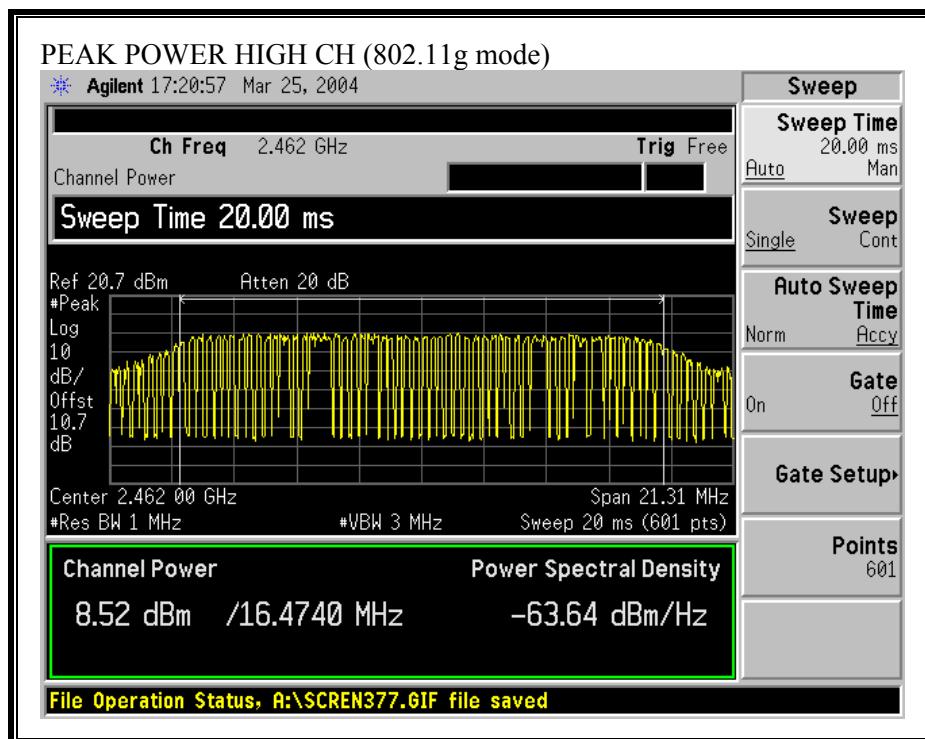

**OUTPUT POWER (802.11a MODE)**

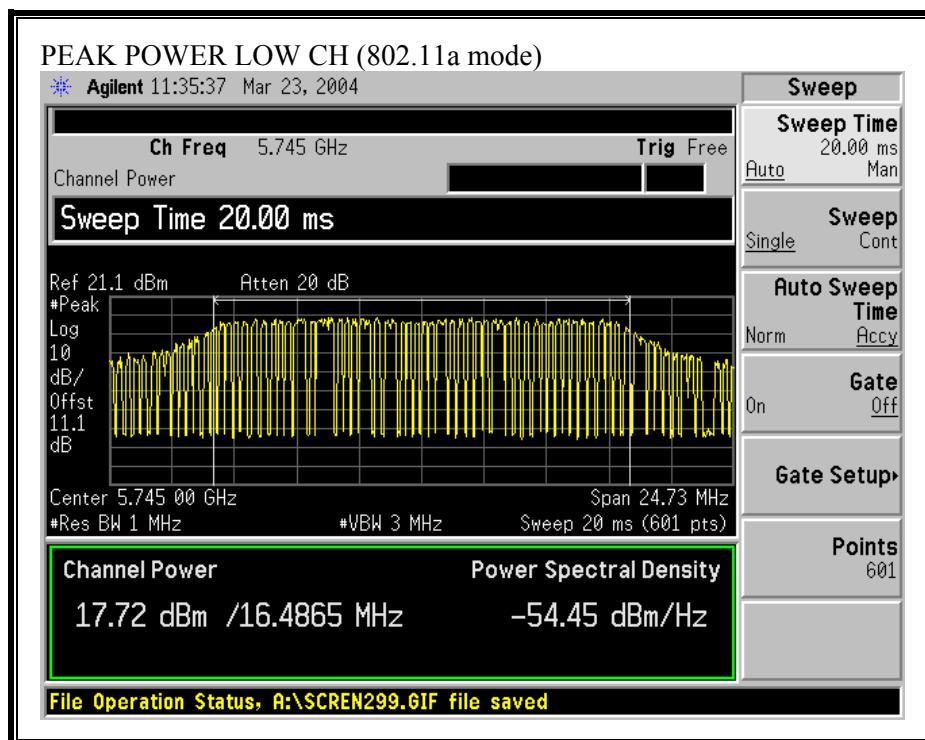

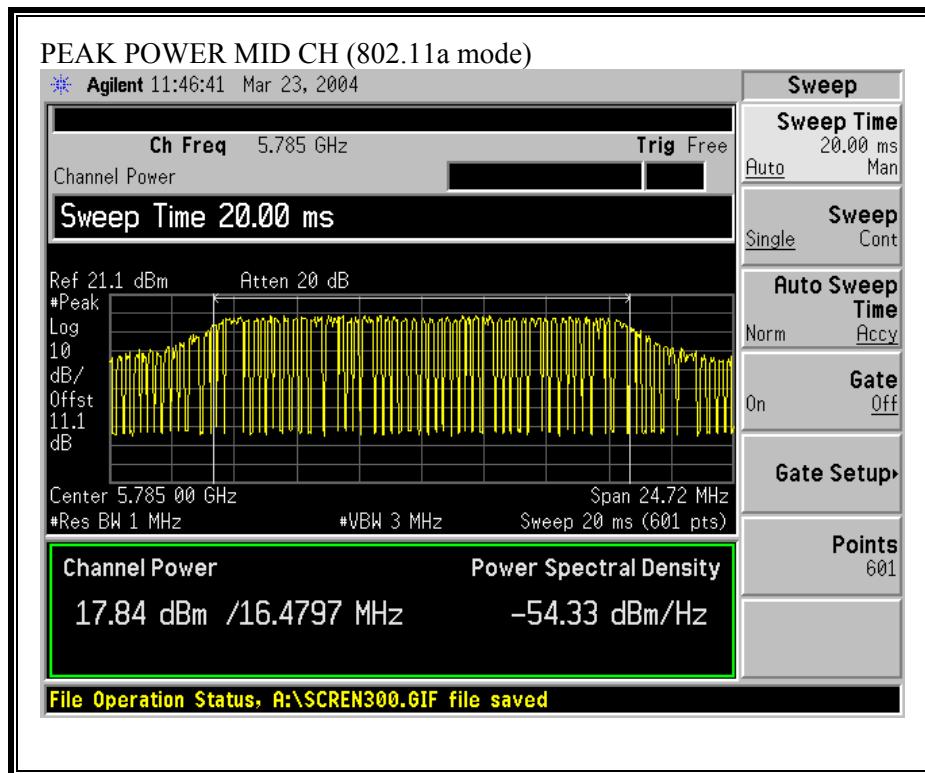

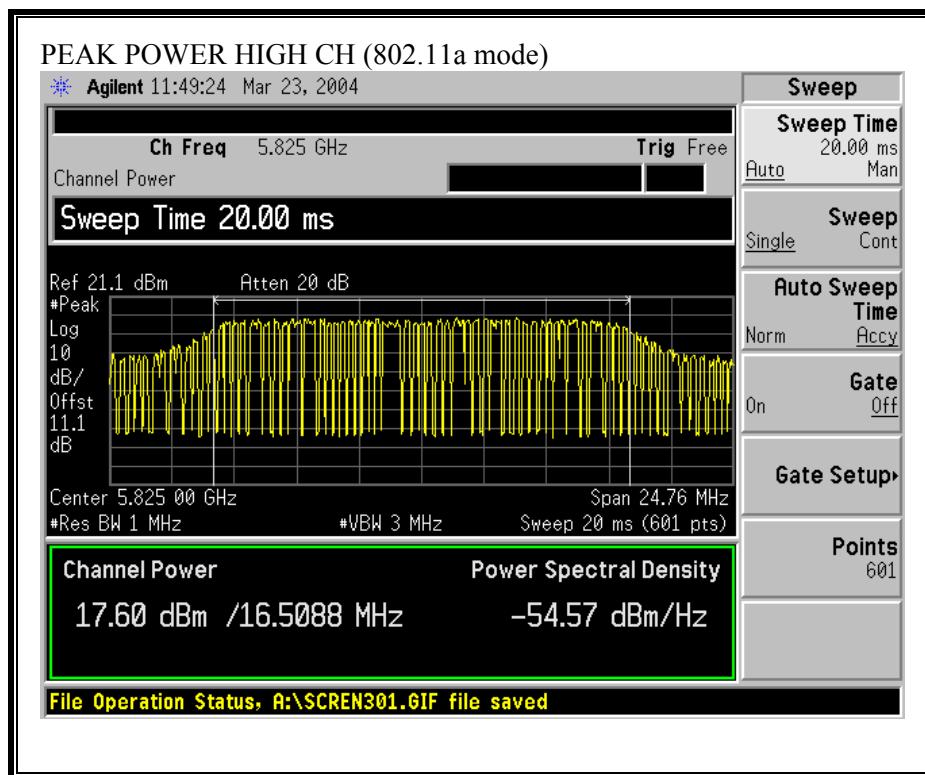

## 7.4. MAXIMUM PERMISSIBLE EXPOSURE

### LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0 .....	614	1.63	*(100)	6
3.0–30 .....	1842f	4.89/f	*(900/f <sup>2</sup> )	6
30–300 .....	61.4	0.163	1.0	6
300–1500 .....	.....	.....	f/300	6
1500–100,000 .....	.....	.....	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34 .....	614	1.63	*(100)	30
1.34–30 .....	824f	2.19/f	*(180/f <sup>2</sup> )	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
30–300 .....	27.5	0.073	0.2	30
300–1500 .....	.....	.....	f/1500	30
1500–100,000 .....	.....	.....	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

## CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P (\text{mW}) = P (\text{W}) / 1000 \text{ and}$$

$$d (\text{cm}) = 100 * d (\text{m})$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm<sup>2</sup>

Substituting the logarithmic form of power and gain using:

$$P (\text{mW}) = 10^{(P (\text{dBm}) / 10)} \text{ and}$$

$$G (\text{numeric}) = 10^{(G (\text{dBi}) / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S} \quad \text{Equation (1)}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm<sup>2</sup>

Equation (1) and the measured peak power is used to calculate the MPE distance.

## LIMITS

From §1.1310 Table 1 (B), S = 1.0 mW/cm<sup>2</sup>

## 2.4 GHz BAND RESULTS

No non-compliance noted:

Mode	Power Density Limit (mW/cm <sup>2</sup> )	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
802.11b	1.0	16.14	19.00	16.12
802.11g	1.0	16.00	19.00	15.86

## 5.8 GHz BAND RESULTS

No non-compliance noted:

Mode	Power Density Limit (mW/cm <sup>2</sup> )	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
802.11a	1.0	17.84	18.00	17.47
802.11a	1.0	17.84	24.00	34.85

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

## 7.5. AVERAGE POWER

### AVERAGE POWER LIMIT

None; for reporting purposes only.

### TEST PROCEDURE

The transmitter output is connected to a power meter.

### 2.4 GHZ BAND RESULTS

No non-compliance noted:

An insertion loss of 10 dB, (attenuator used in front of the power meter), was entered as an offset in the power meter to allow for direct reading of power.

#### 802.11b Mode

Channel	Frequency (MHz)	Average Power (dBm)
Low	2412	7.80
Middle	2437	12.40
High	2462	8.60

#### 802.11g Mode

Channel	Frequency (MHz)	Average Power (dBm)
Low	2417	8.50
Middle	2437	8.50
High	2462	1.80

### **5.8 GHZ BAND RESULTS**

No non-compliance noted:

An insertion loss of 10 dB, (attenuator used in front of the power meter), was entered as an offset in the power meter to allow for direct reading of power.

802.11a Mode

Channel	Frequency (MHz)	Average Power (dBm)
Low	5745	10.00
Middle	5785	10.20
High	5825	10.00

## 7.6. PEAK POWER SPECTRAL DENSITY

### LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

### 2.4 GHz BAND RESULTS

No non-compliance noted:

802.11b Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-12.01	8	-20.01
Middle	2437	-7.70	8	-15.70
High	2462	-12.37	8	-20.37

802.11g Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2417	-10.90	8	-18.90
Middle	2437	-10.93	8	-18.93
High	2462	-17.84	8	-25.84


### **5.8 GHz BAND RESULTS**


No non-compliance noted:


802.11a Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	5745	-12.25	8	-20.25
Middle	5785	-13.62	8	-21.62
High	5825	-11.81	8	-19.81


**PEAK POWER SPECTRAL DENSITY (802.11b MODE)**

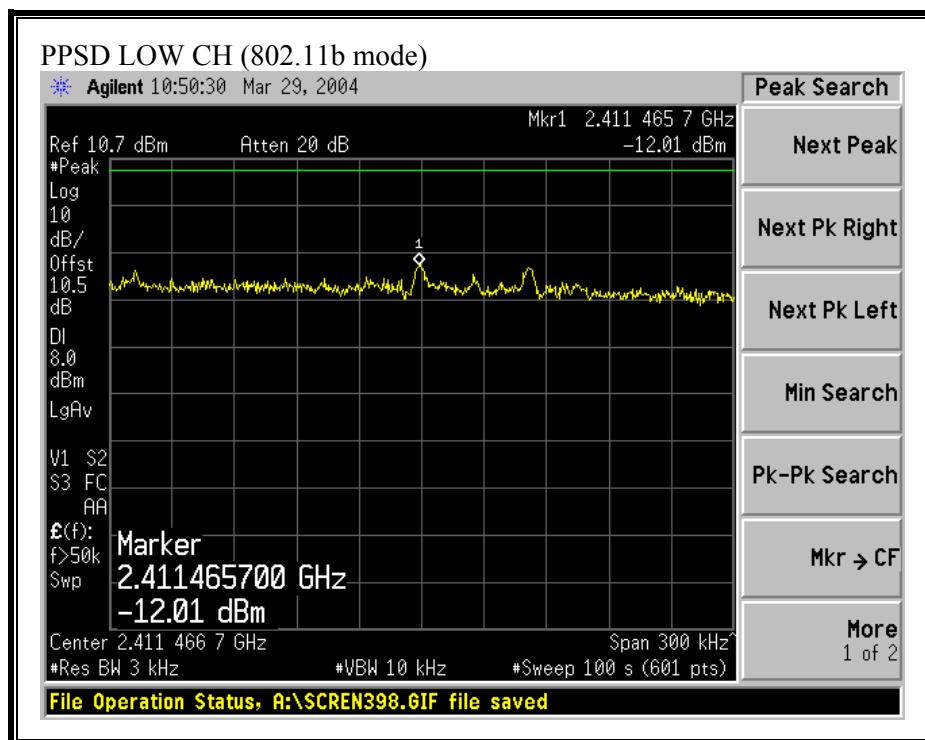


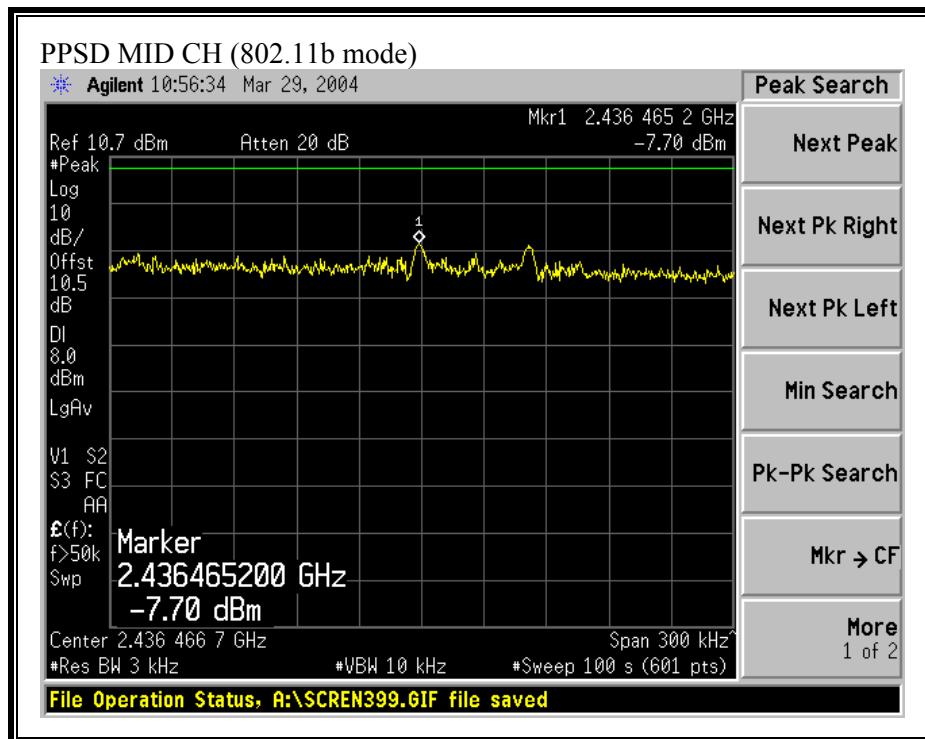


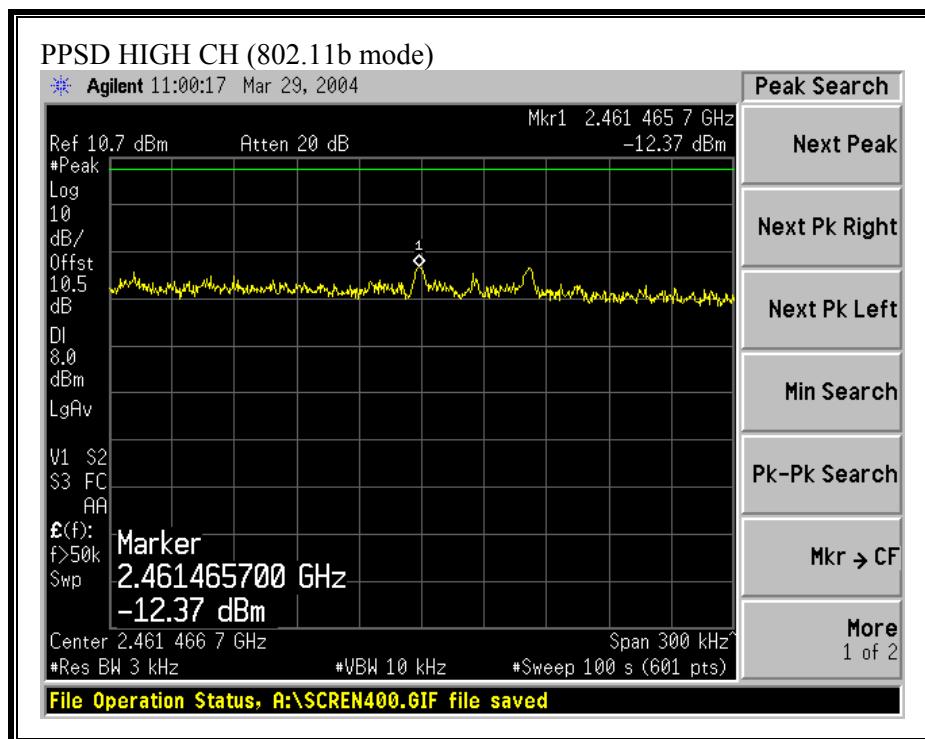


**PEAK POWER SPECTRAL DENSITY (802.11g MODE)**

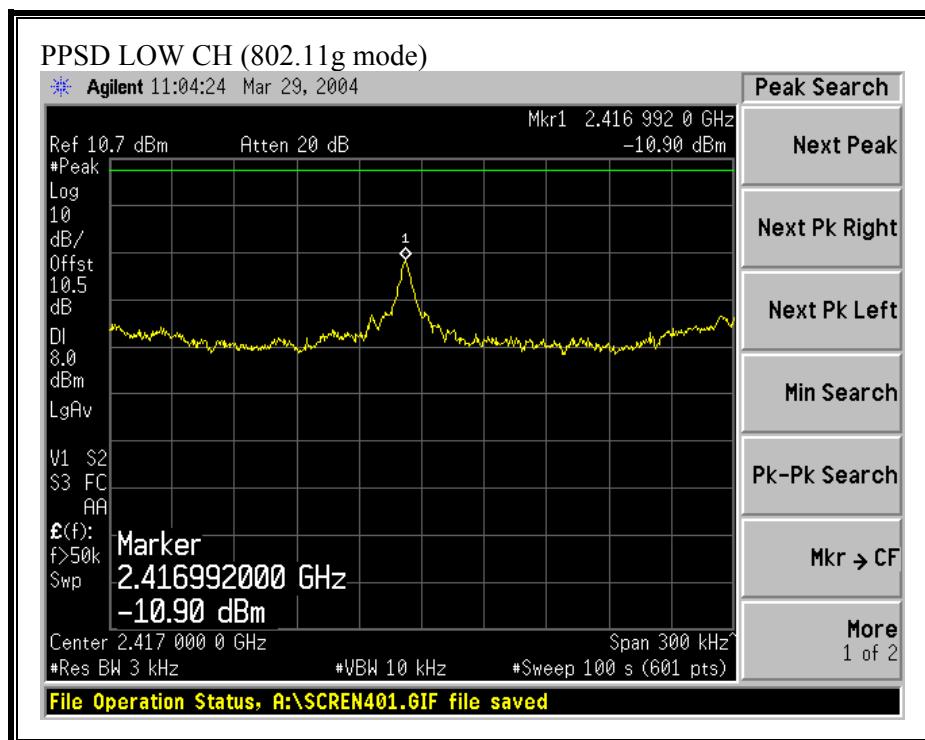


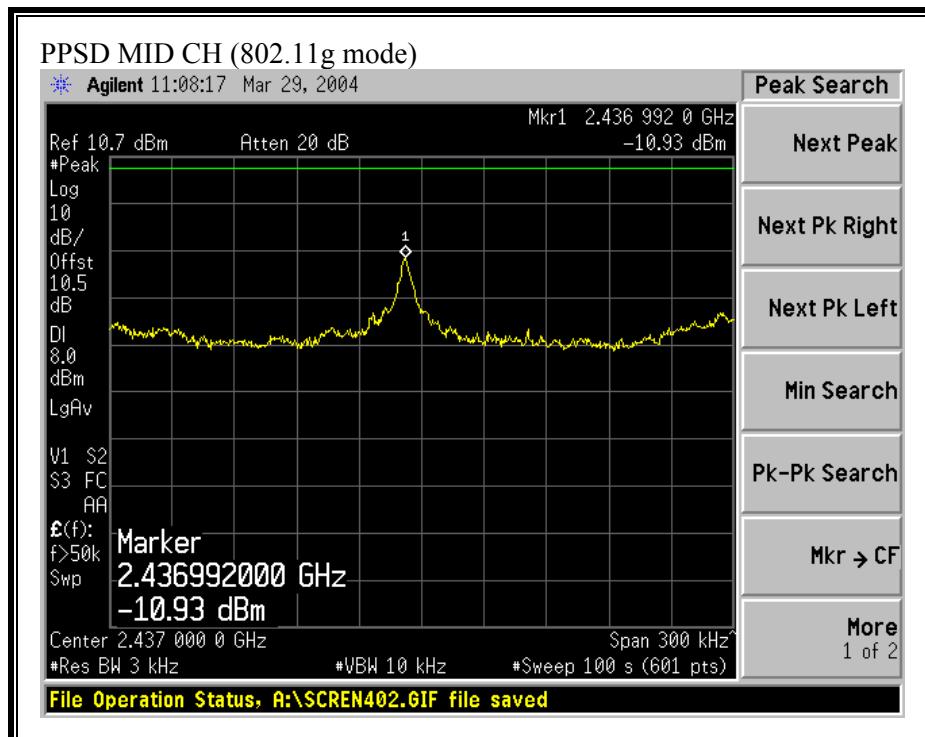


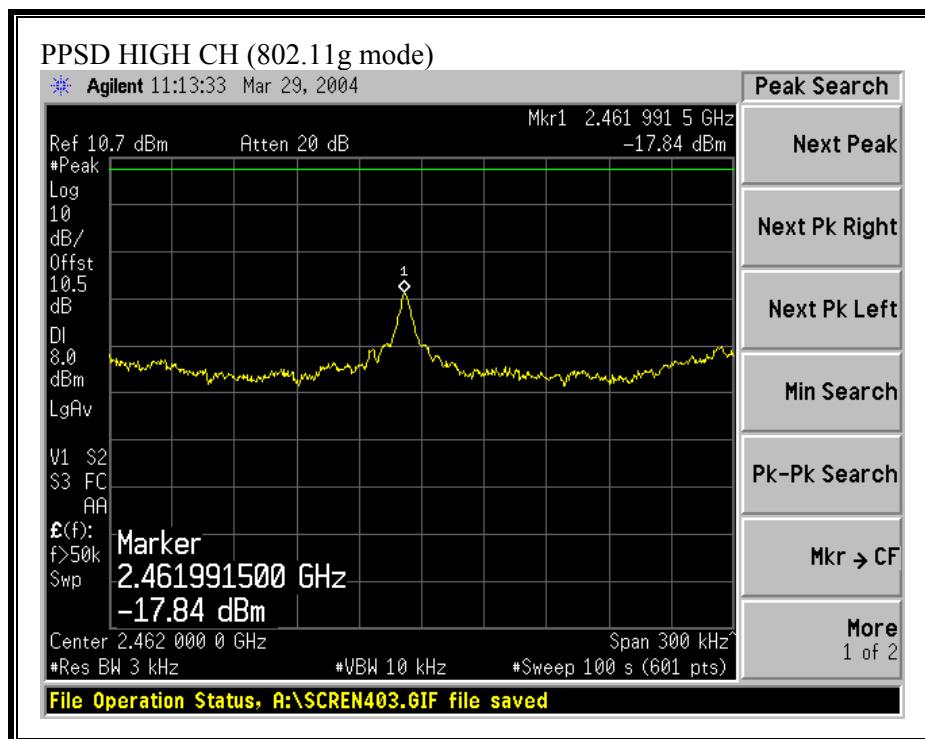

**PEAK POWER SPECTRAL DENSITY (802.11a MODE)**

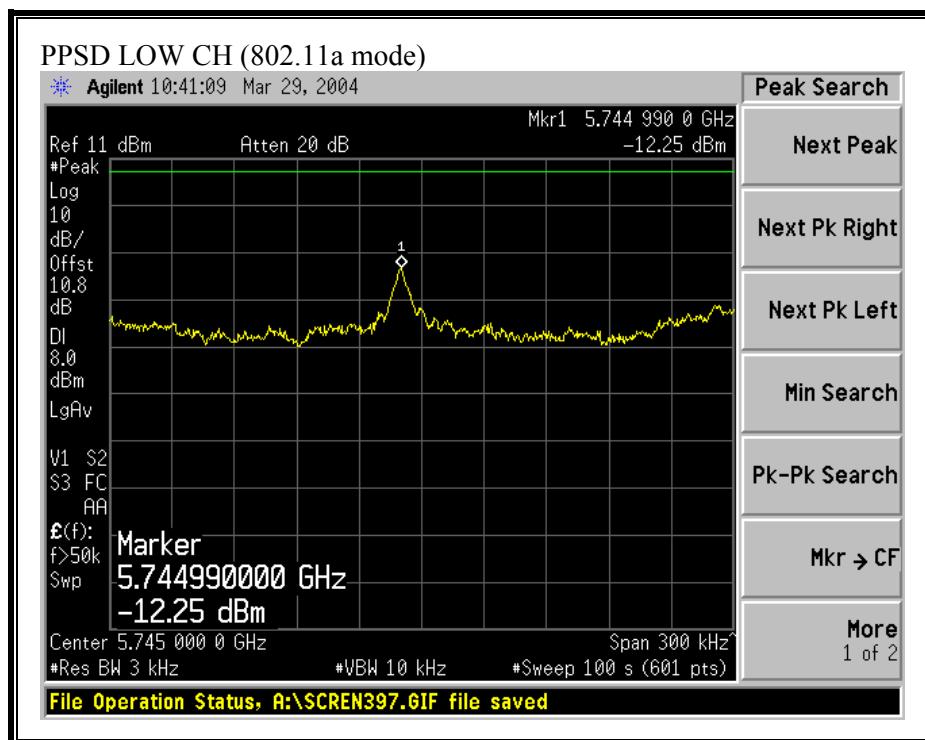

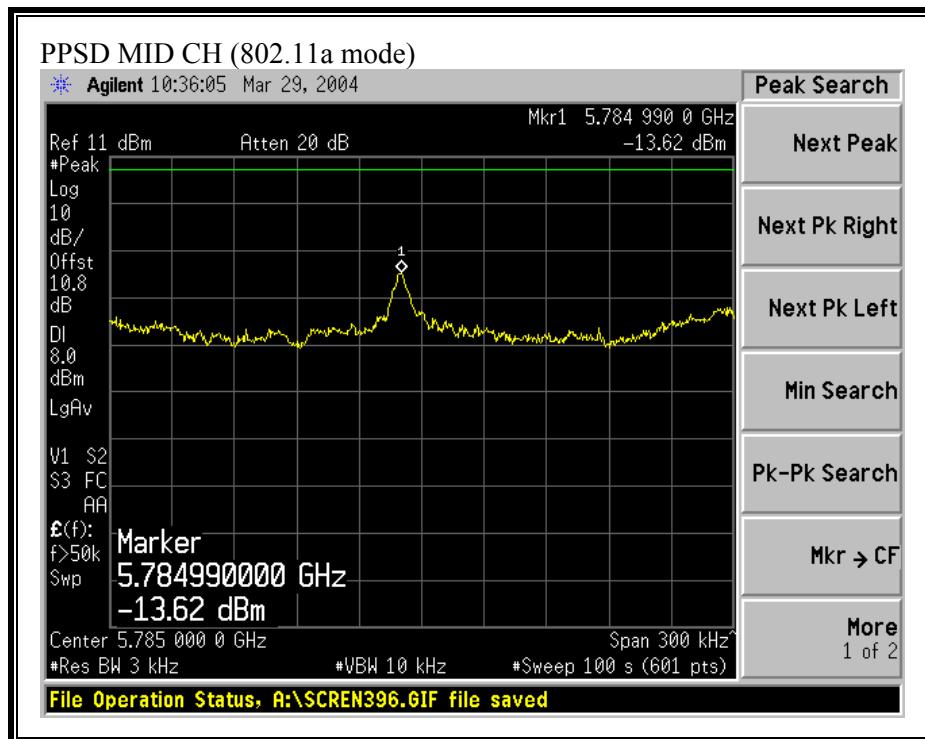

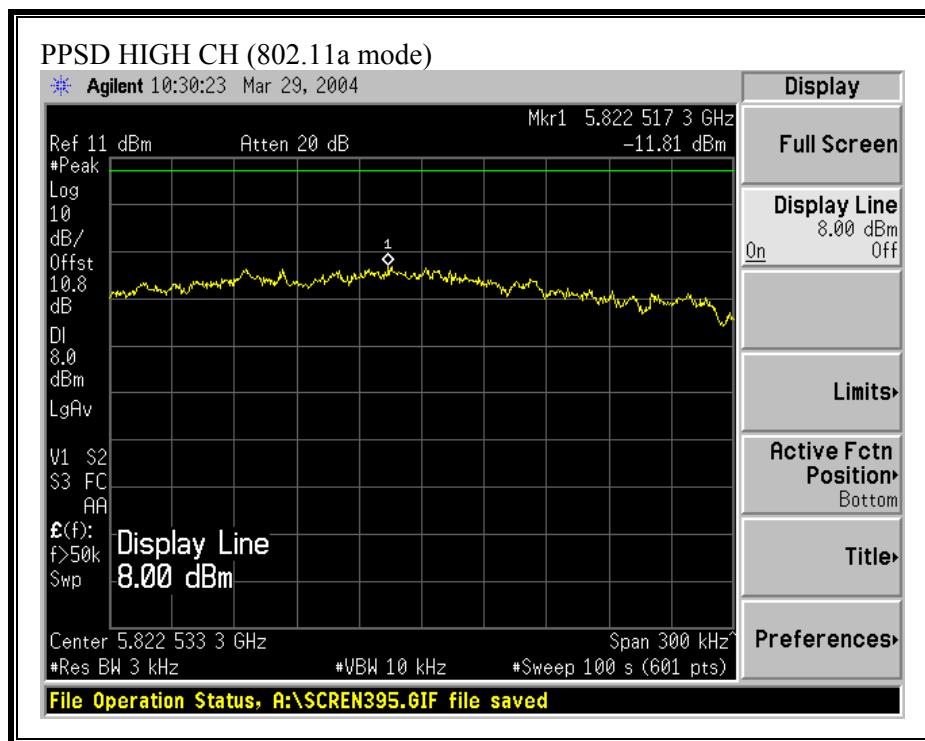

## 7.7. CONDUCTED SPURIOUS EMISSIONS

### LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 5.8 GHz band.

### RESULTS


No non-compliance noted:


**SPURIOUS EMISSIONS, LOW CHANNEL (802.11b MODE)**

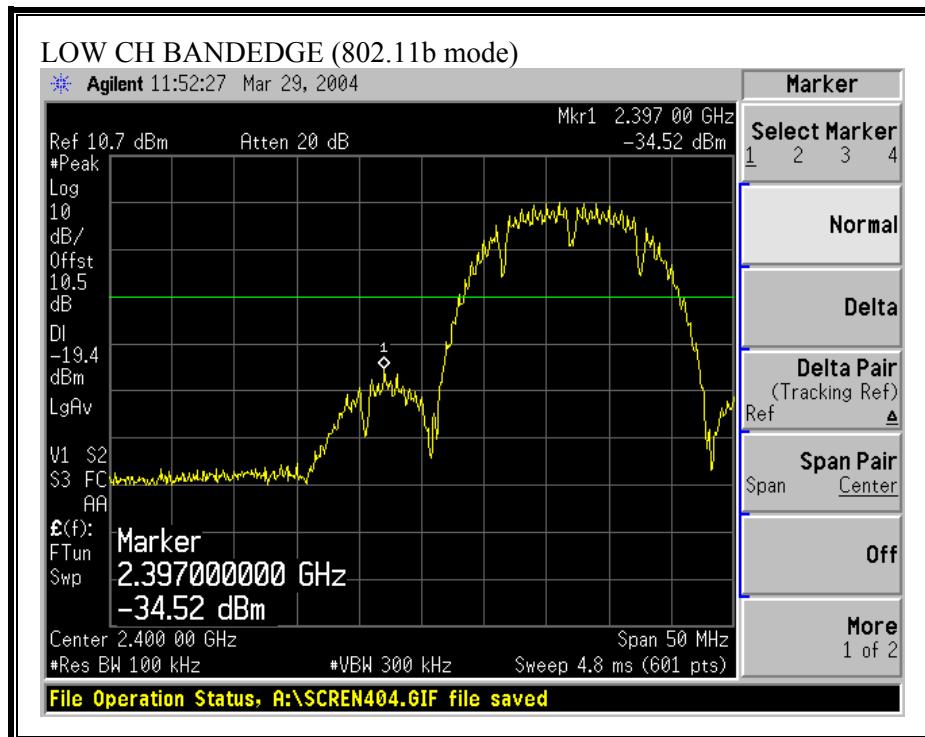

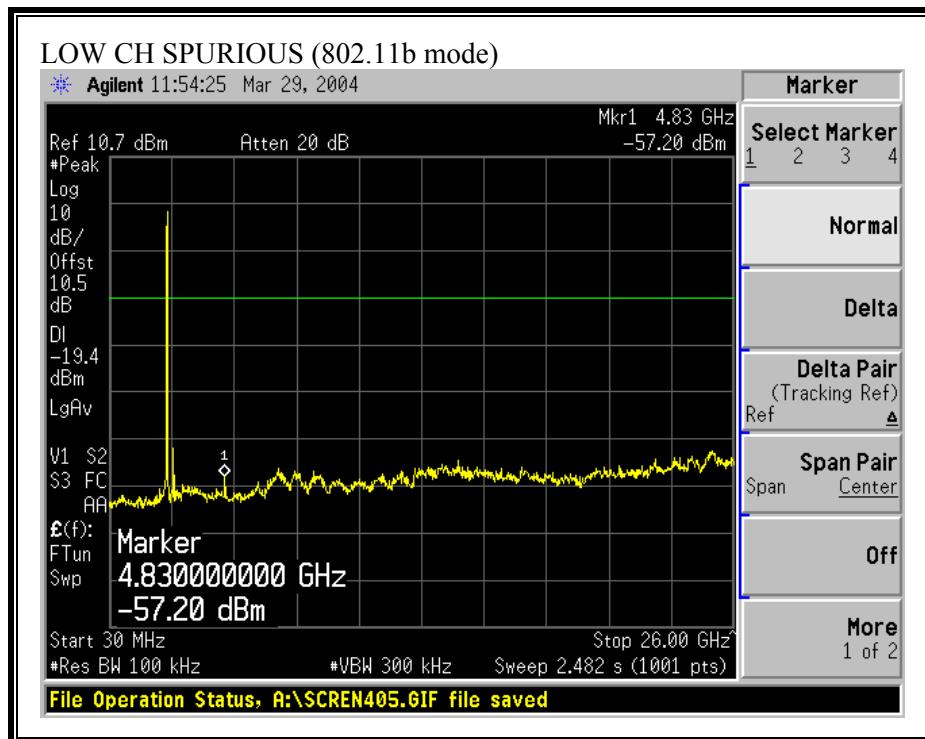



**SPURIOUS EMISSIONS, MID CHANNEL (802.11b MODE)**

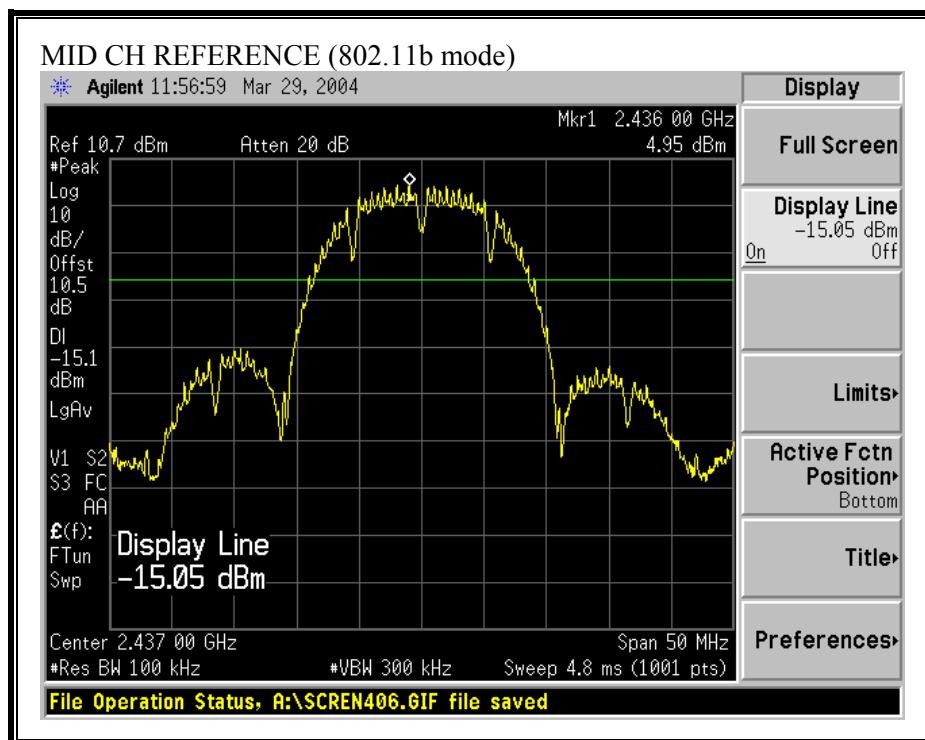

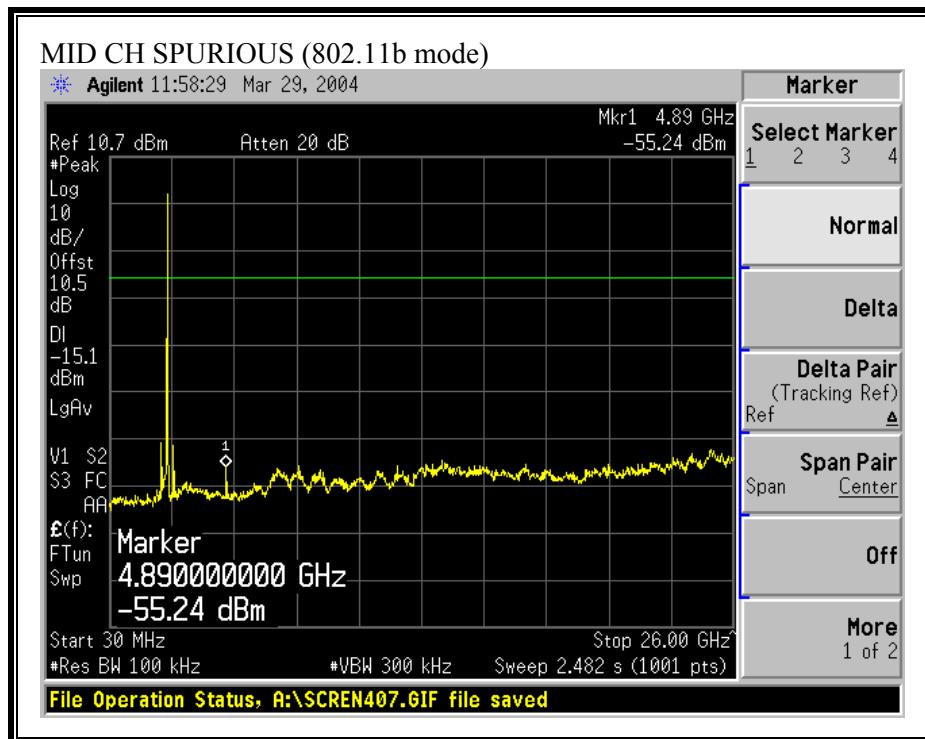



**SPURIOUS EMISSIONS, HIGH CHANNEL (802.11b MODE)**

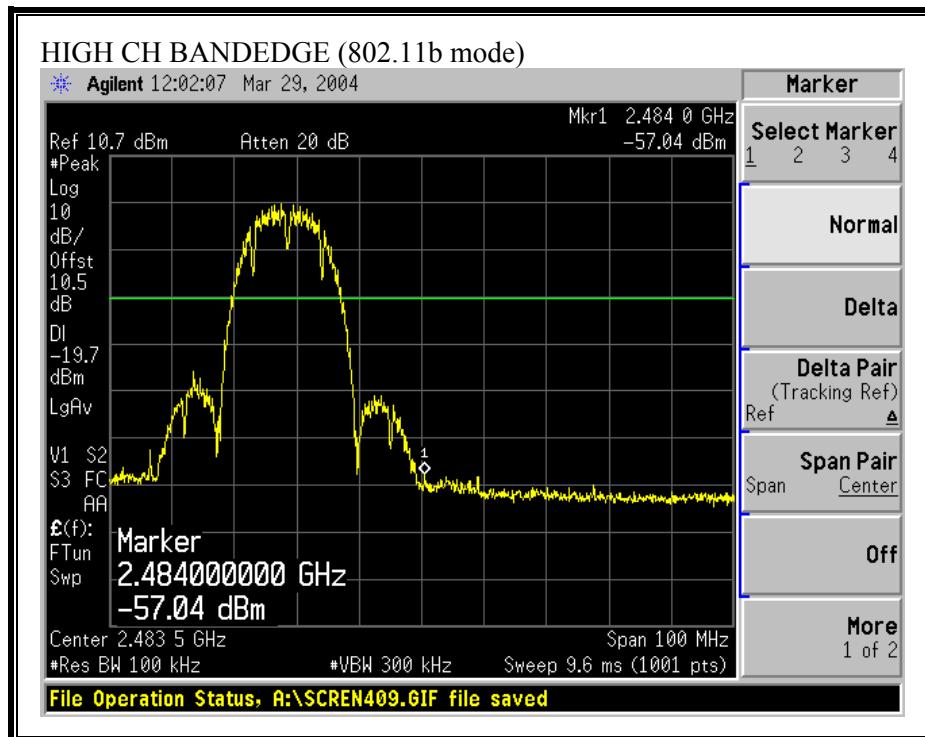

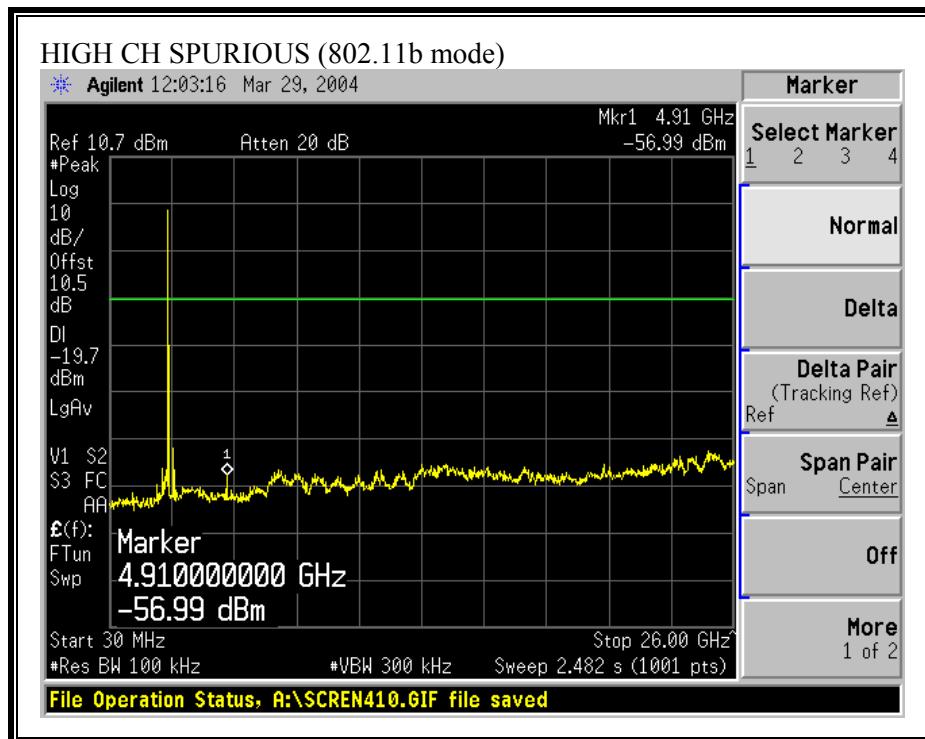



**SPURIOUS EMISSIONS, LOW CHANNEL (802.11g MODE)**

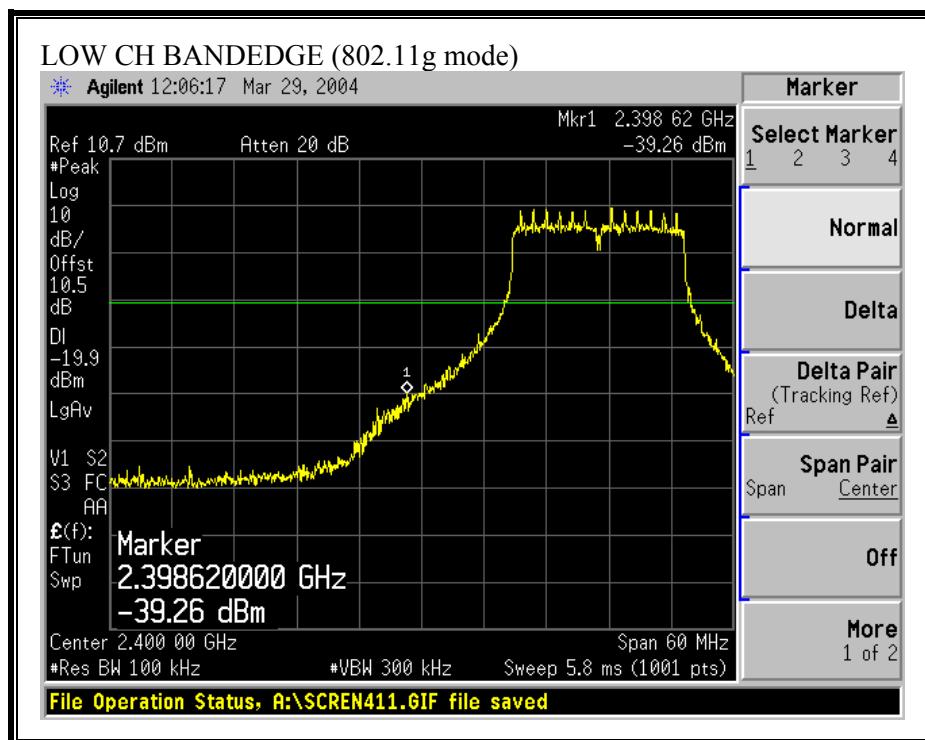

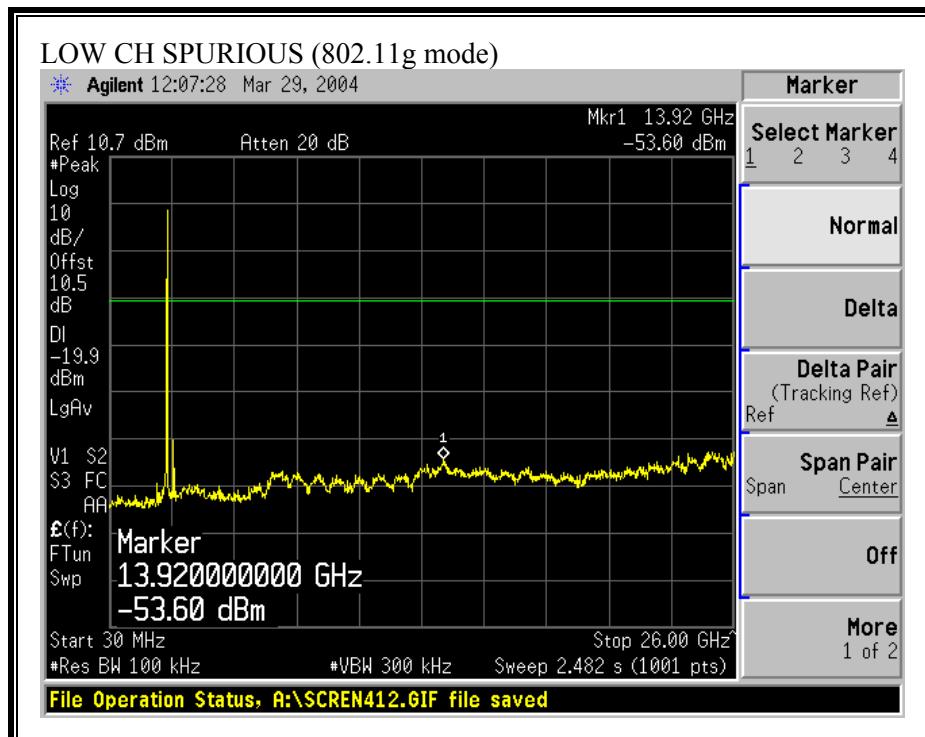



**SPURIOUS EMISSIONS, MID CHANNEL (802.11g MODE)**

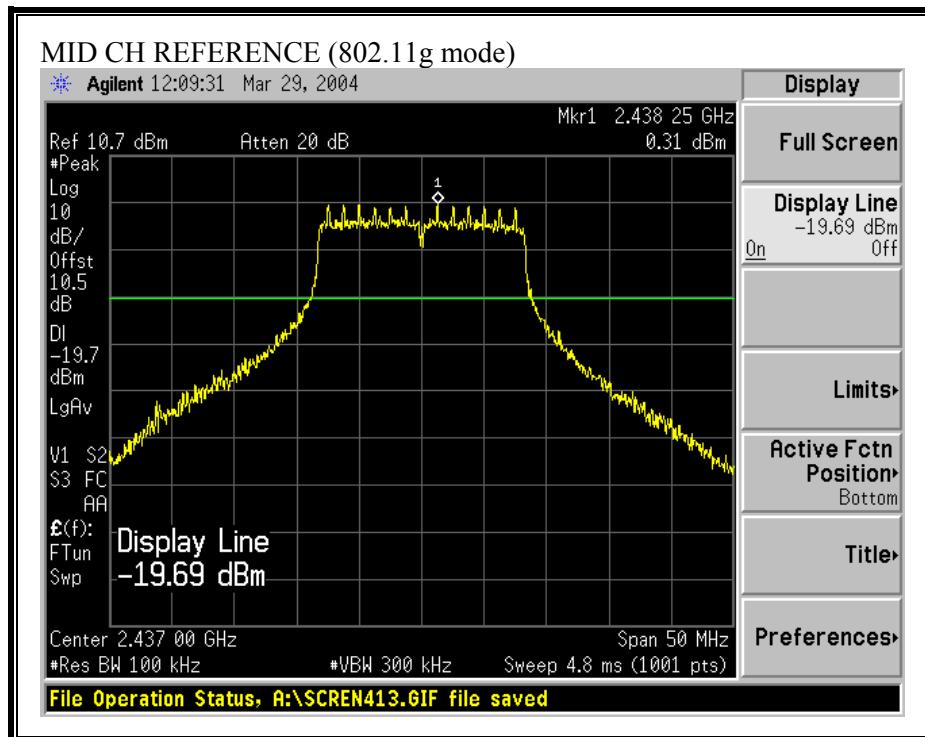

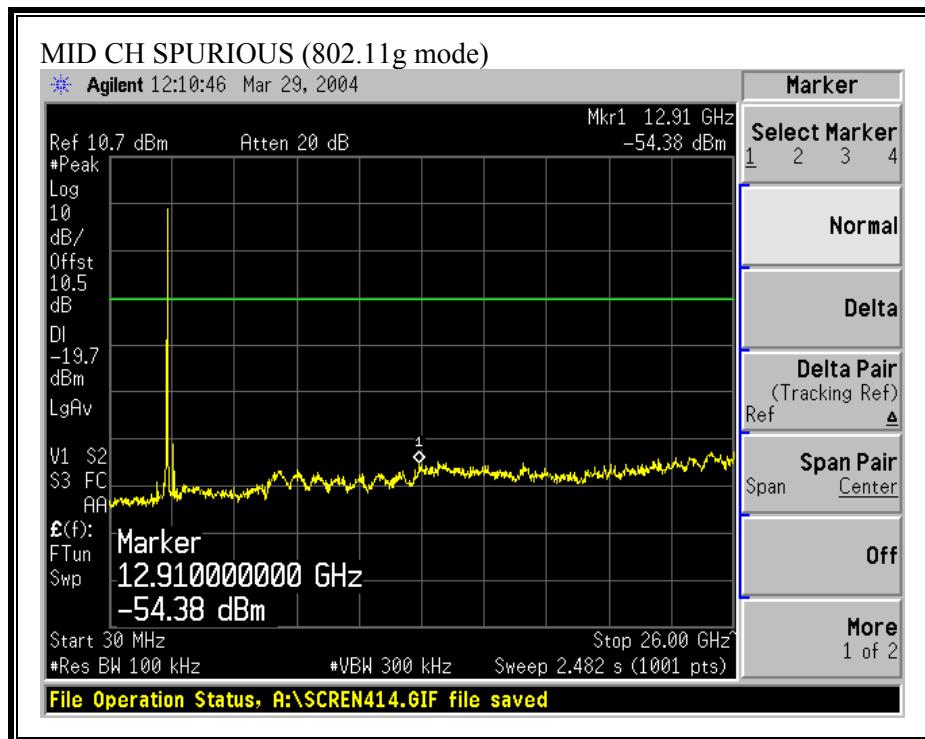



**SPURIOUS EMISSIONS, HIGH CHANNEL (802.11g MODE)**

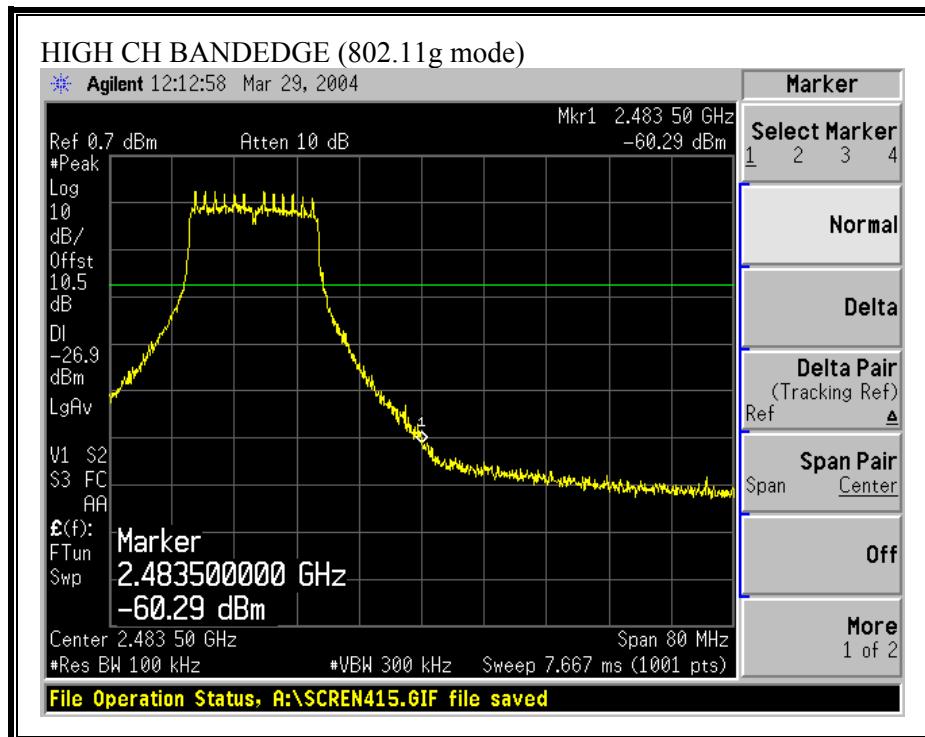

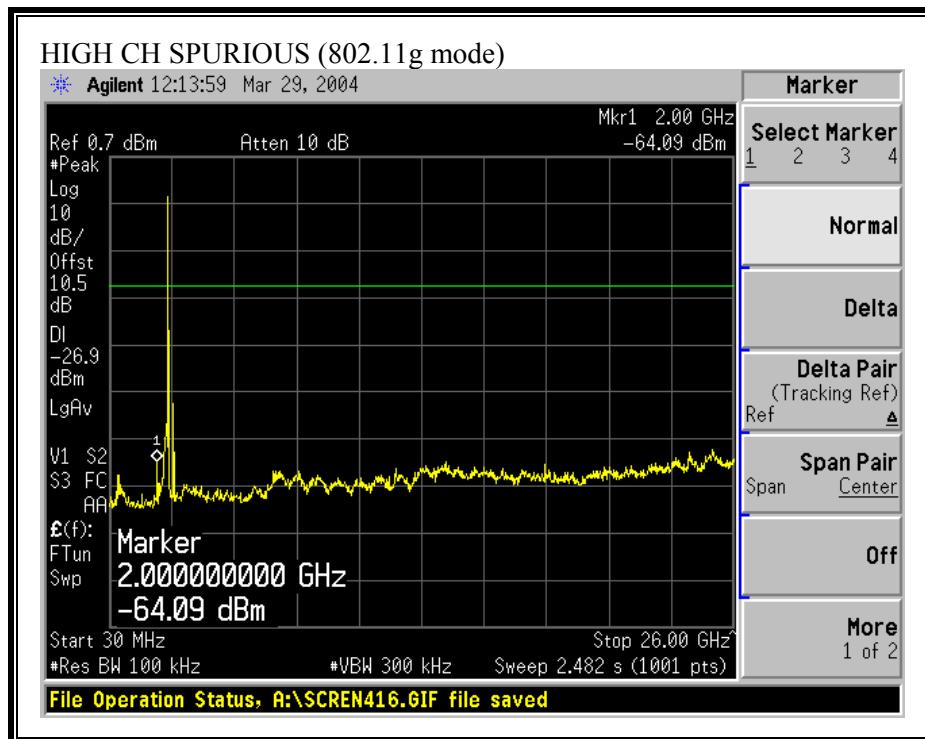



**SPURIOUS EMISSIONS, LOW CHANNEL (802.11a MODE)**

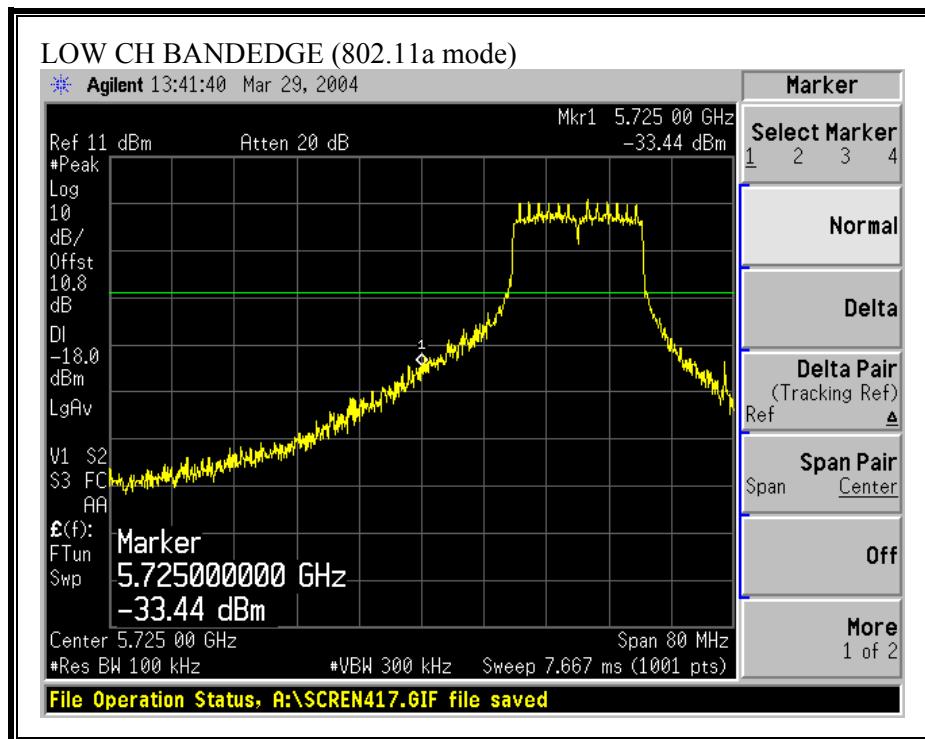

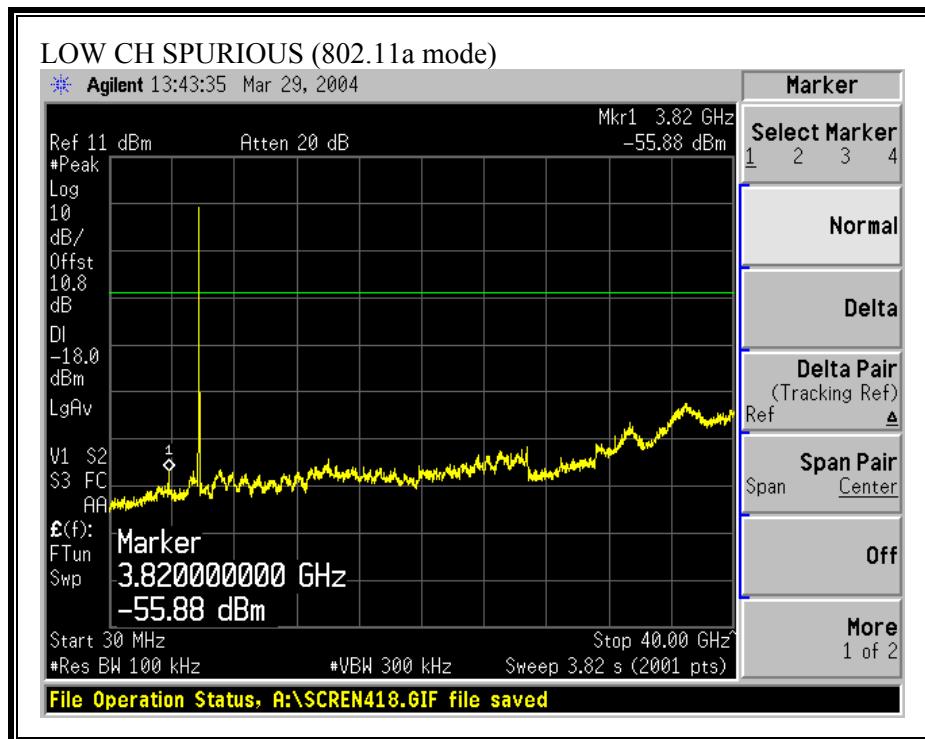



**SPURIOUS EMISSIONS, MID CHANNEL (802.11a MODE)**

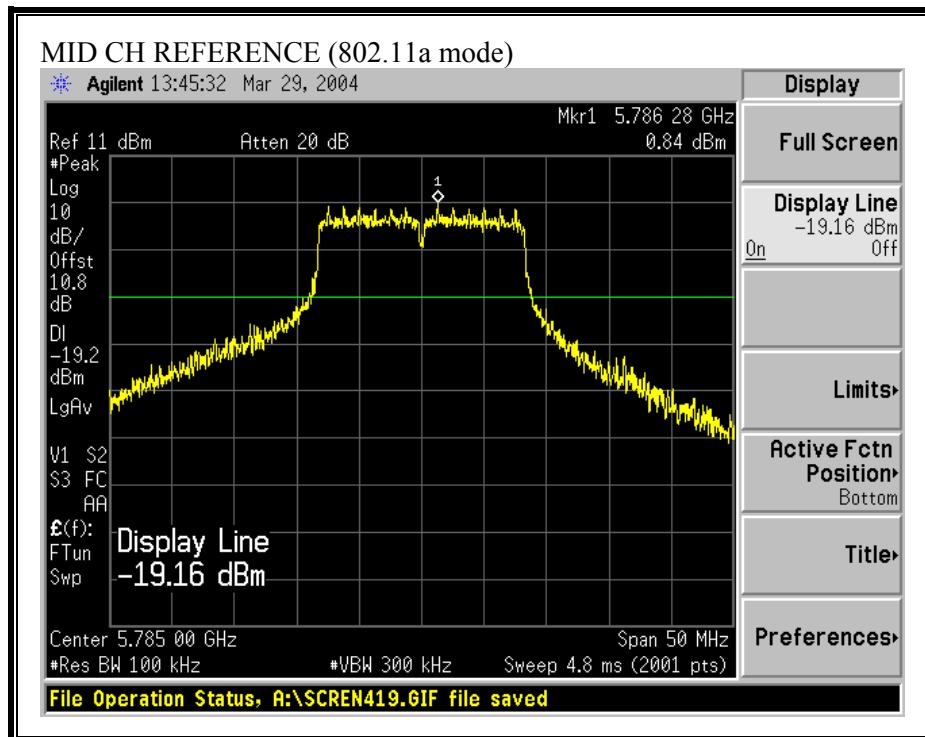

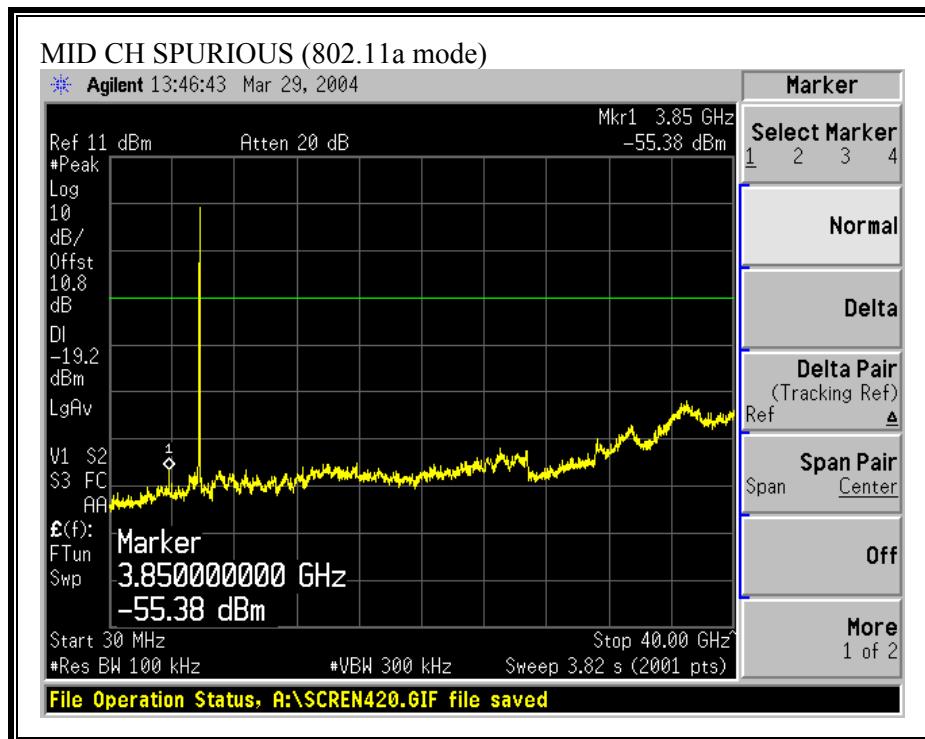

**SPURIOUS EMISSIONS, HIGH CHANNEL (802.11a MODE)**

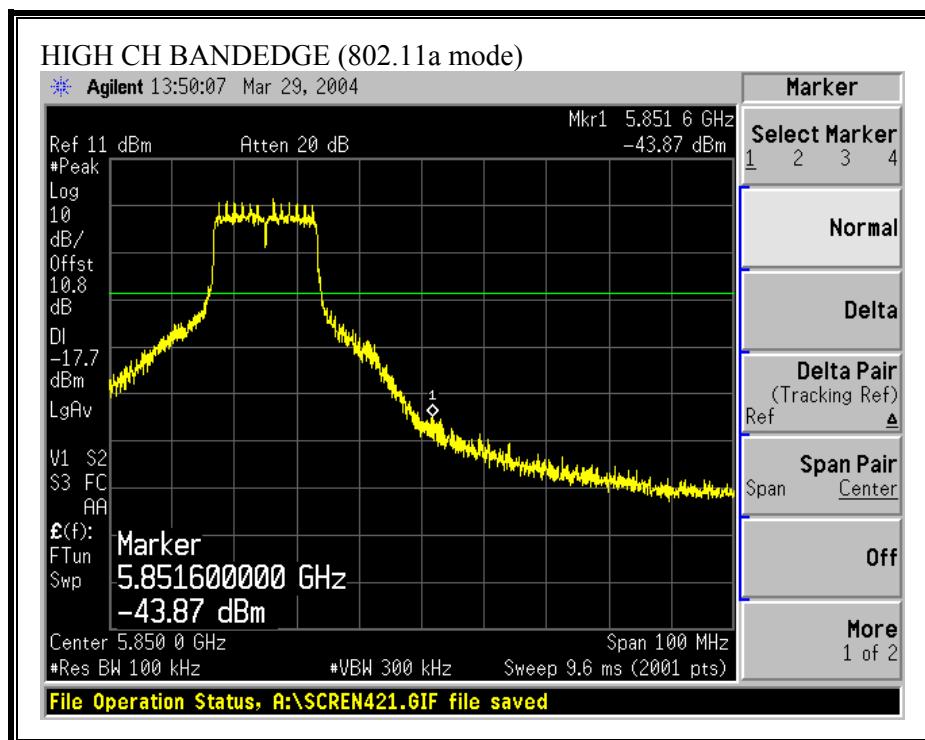

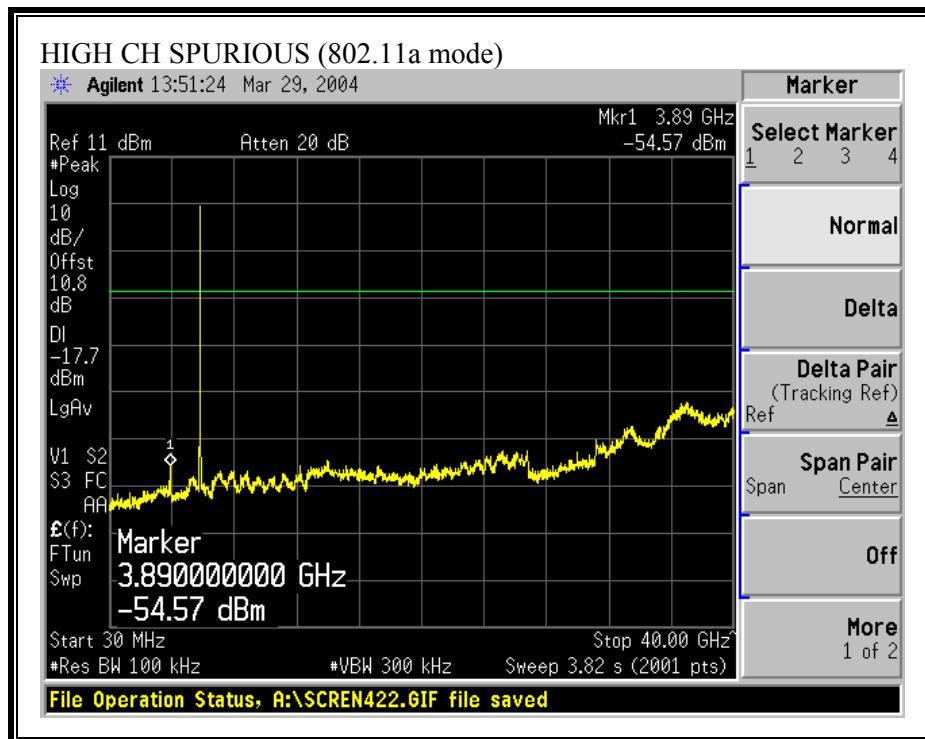

## 7.8. RADIATED EMISSIONS

### 7.8.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

#### LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

## **TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels of the 2.4 GHz band.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels of the 5.8 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Restricted bandedge emissions for the 2.4 GHz band were evaluated for both antenna types. The worst-case results are reported.


## **RESULTS**


The worst-case 2.4 GHz restricted bandedge emissions were detected with the 19 dBi Panel antenna.

No non-compliance noted:


## 7.8.2. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ


### RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

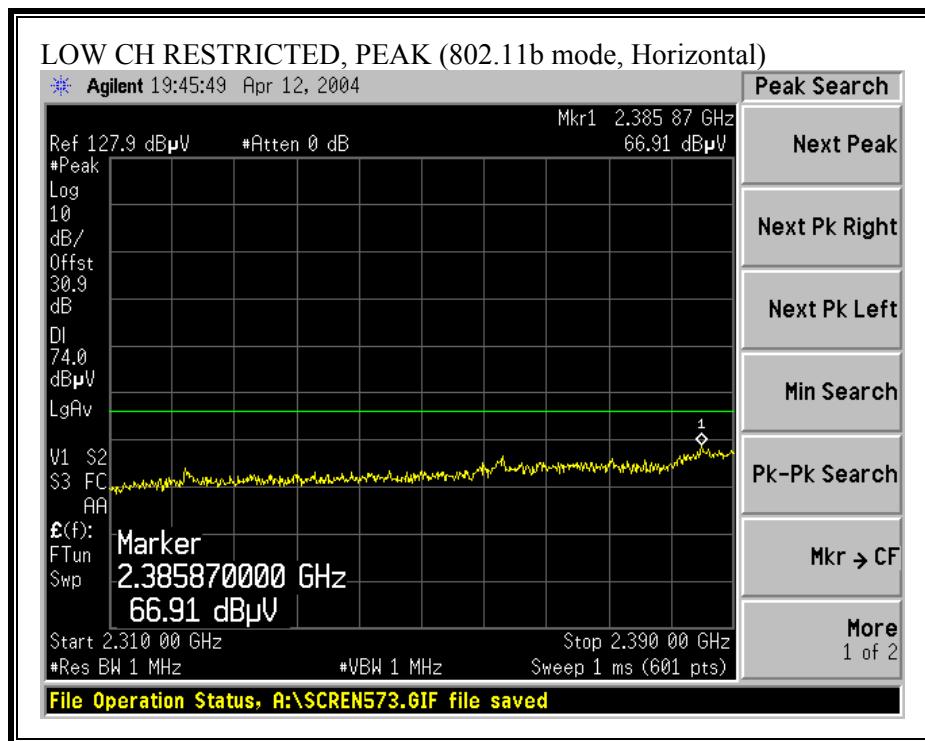

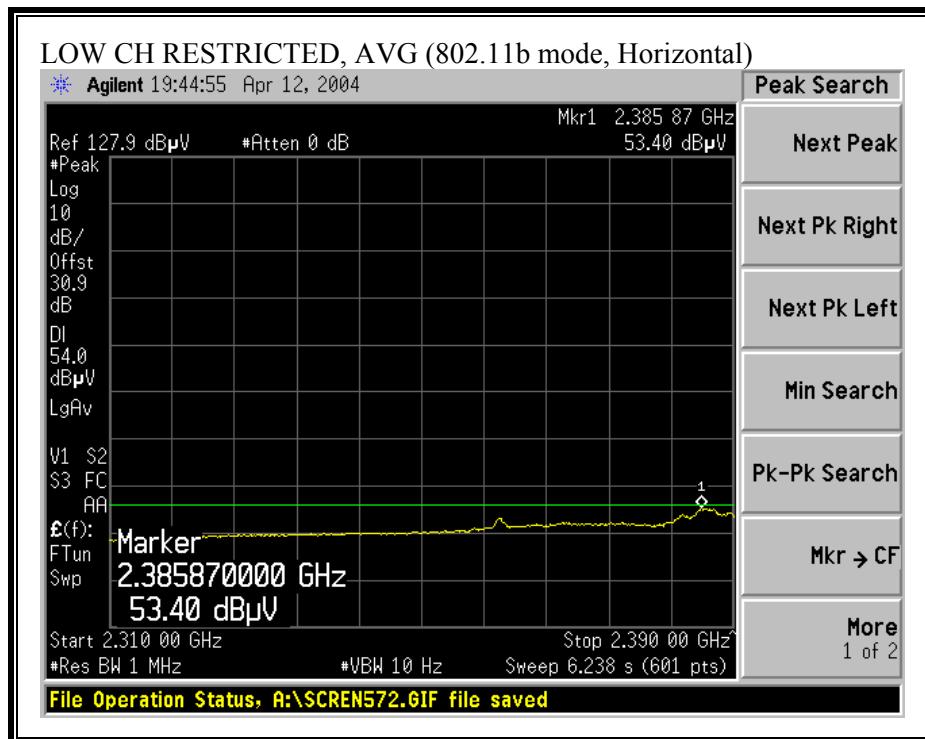



**RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)**

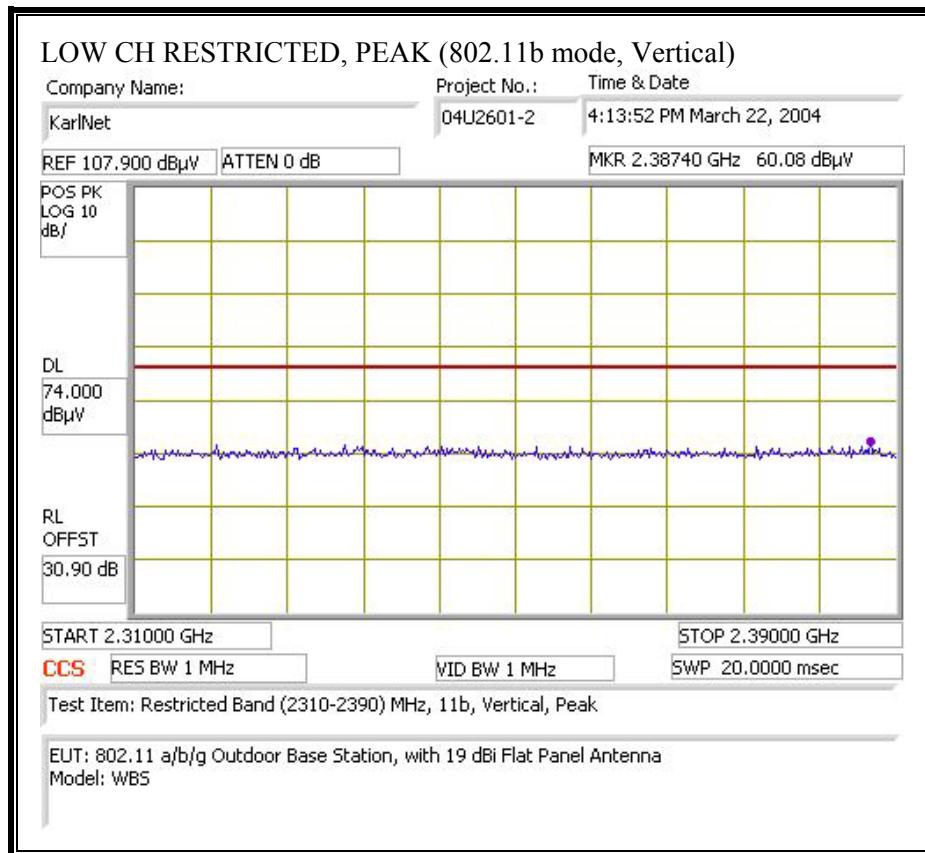

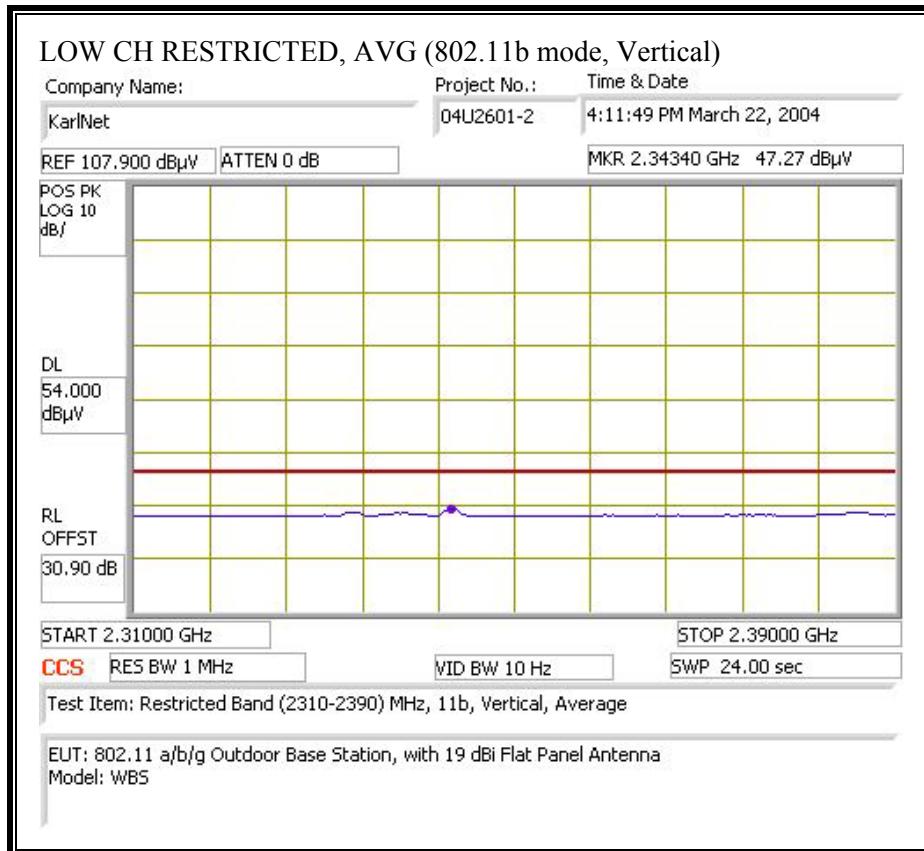



**RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)**

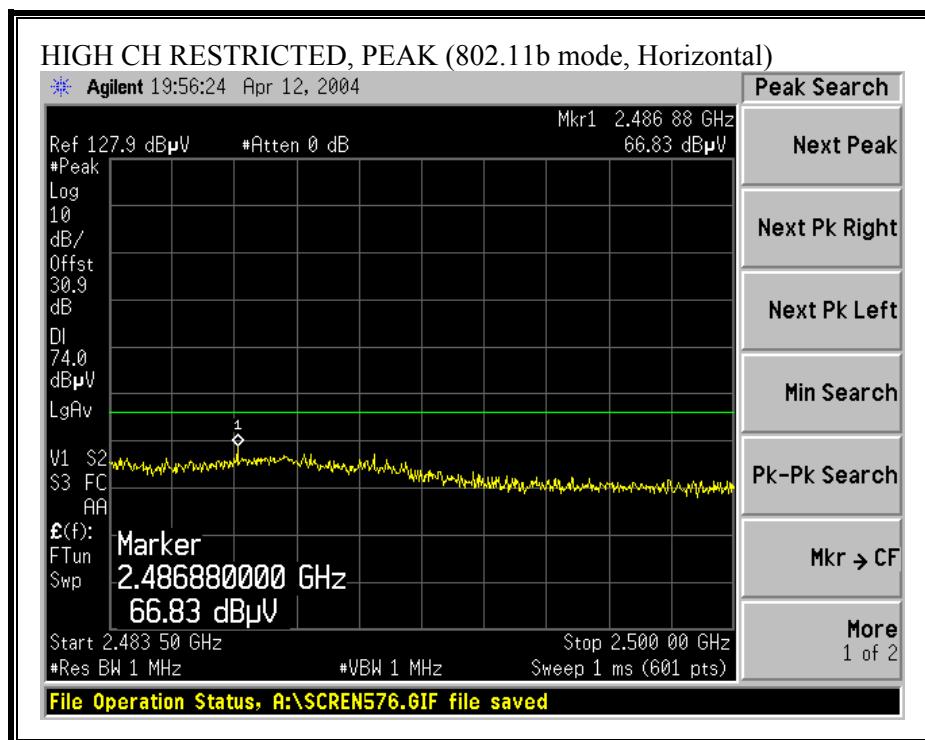

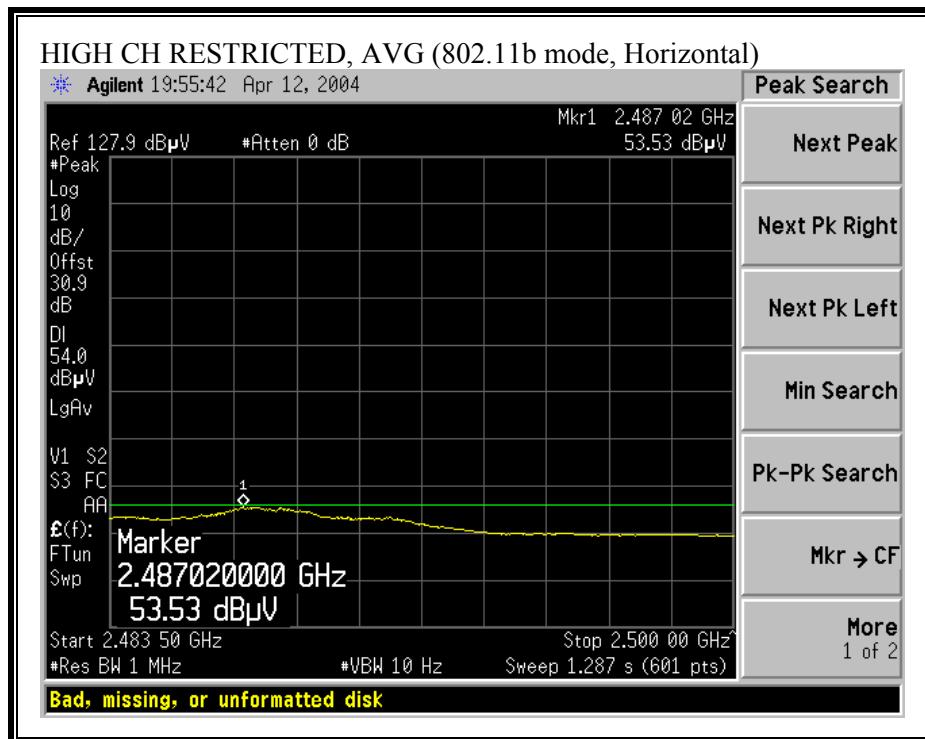



**RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)**

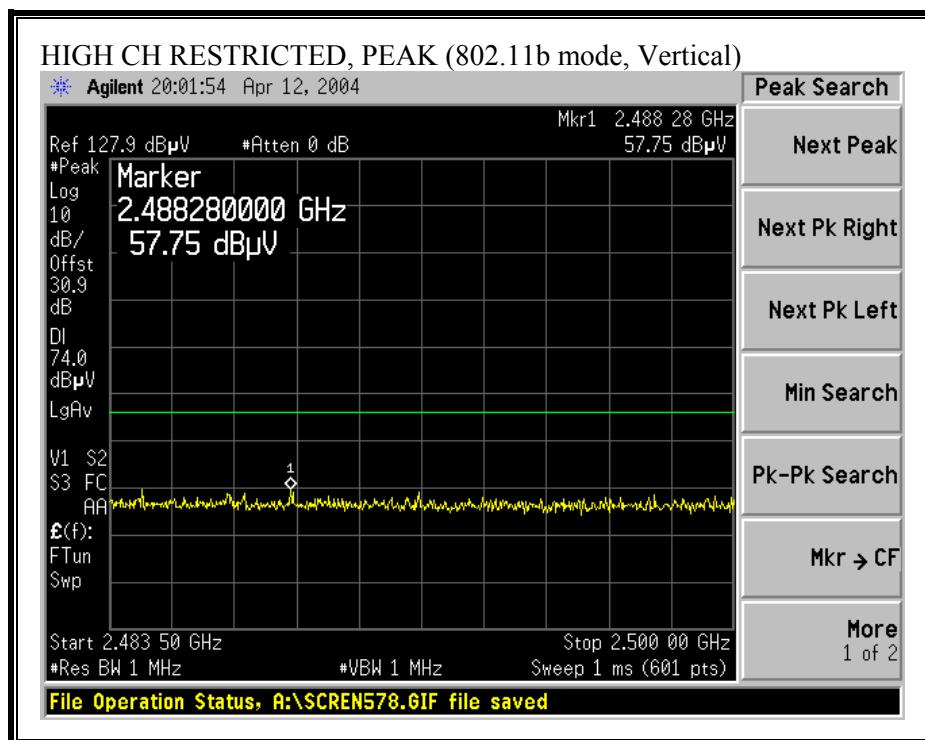

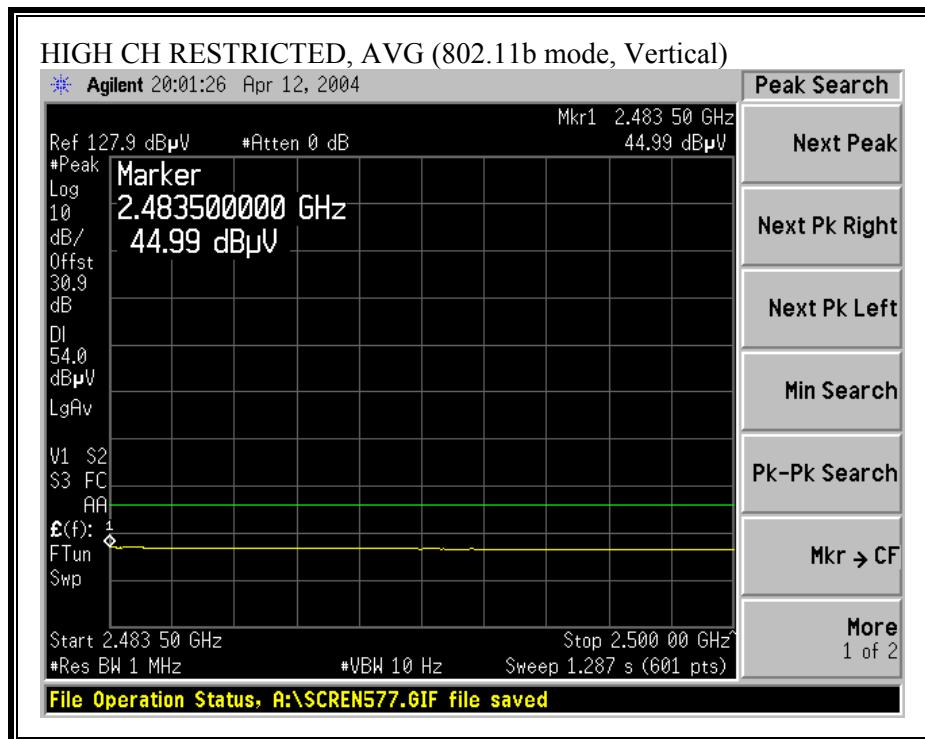



**RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)**

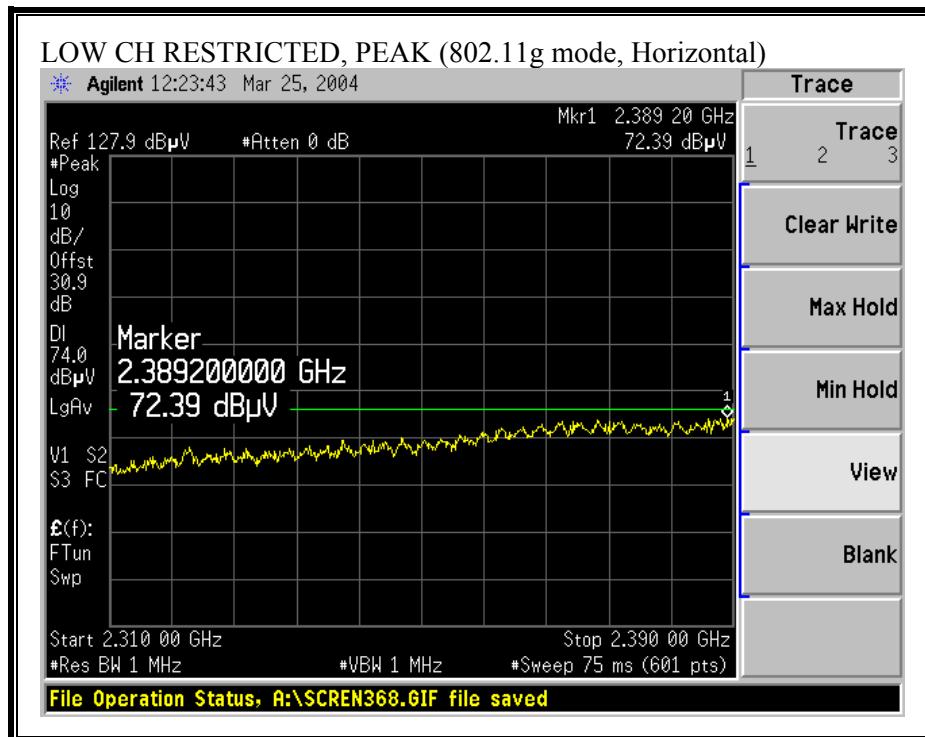

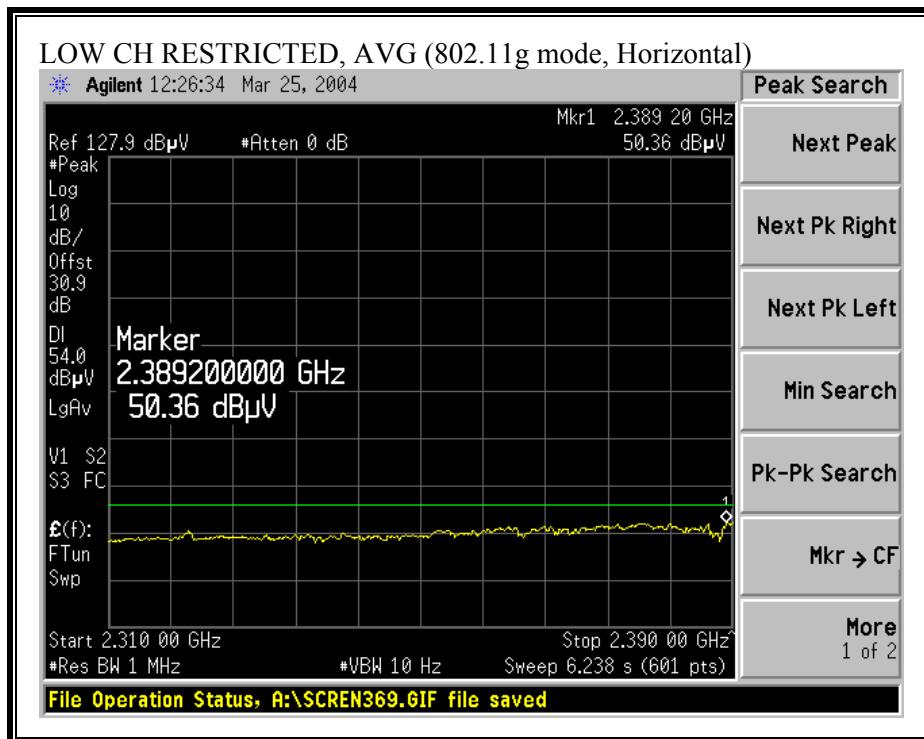



**RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)**

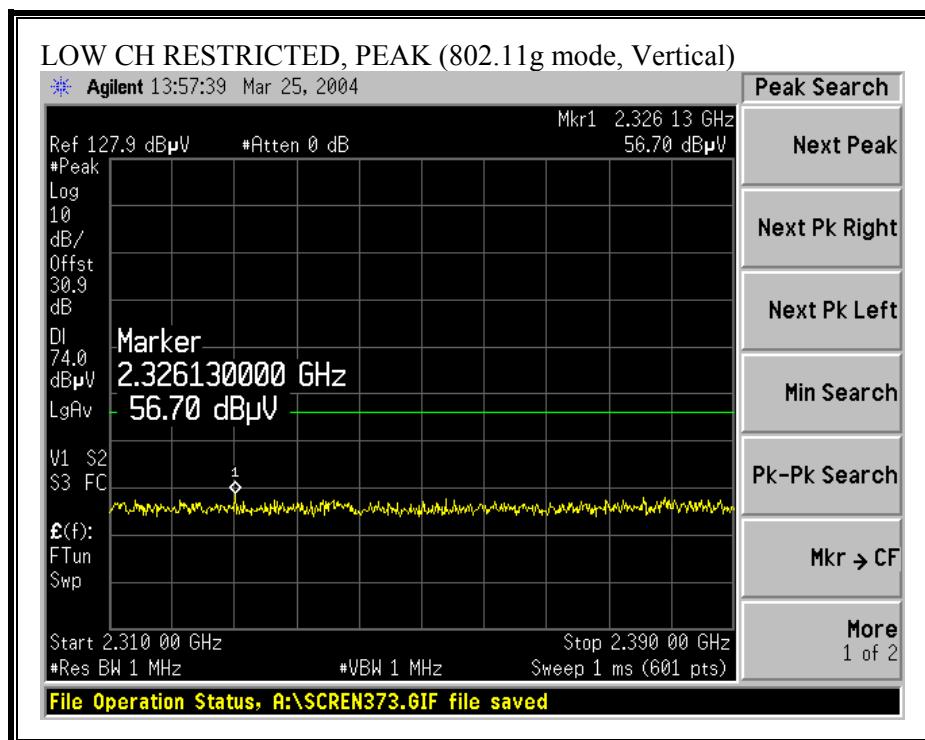

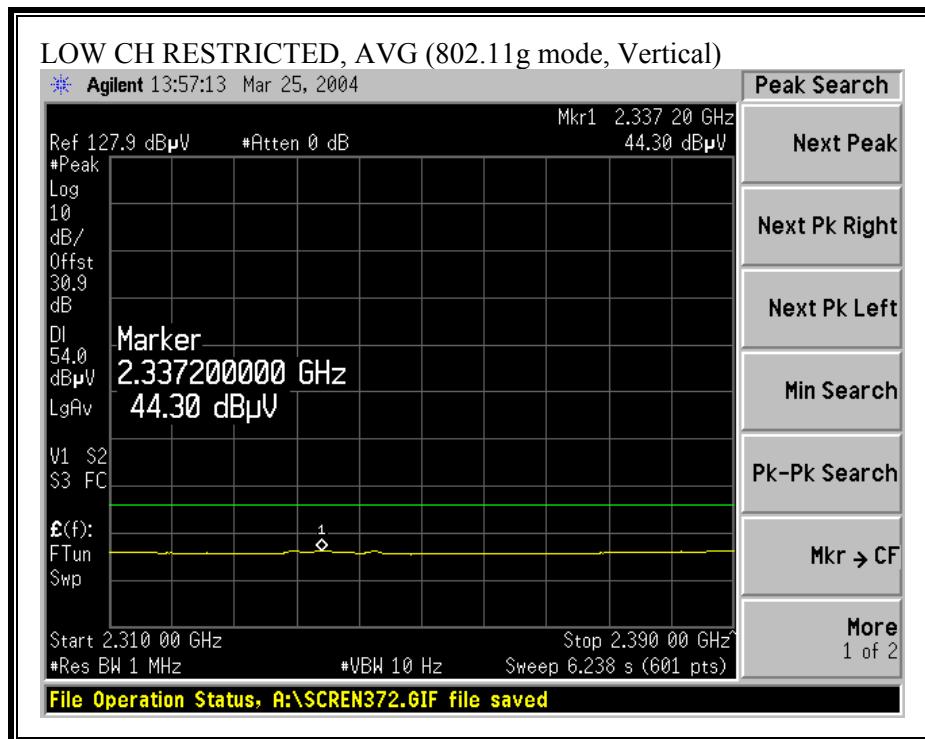



**RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)**

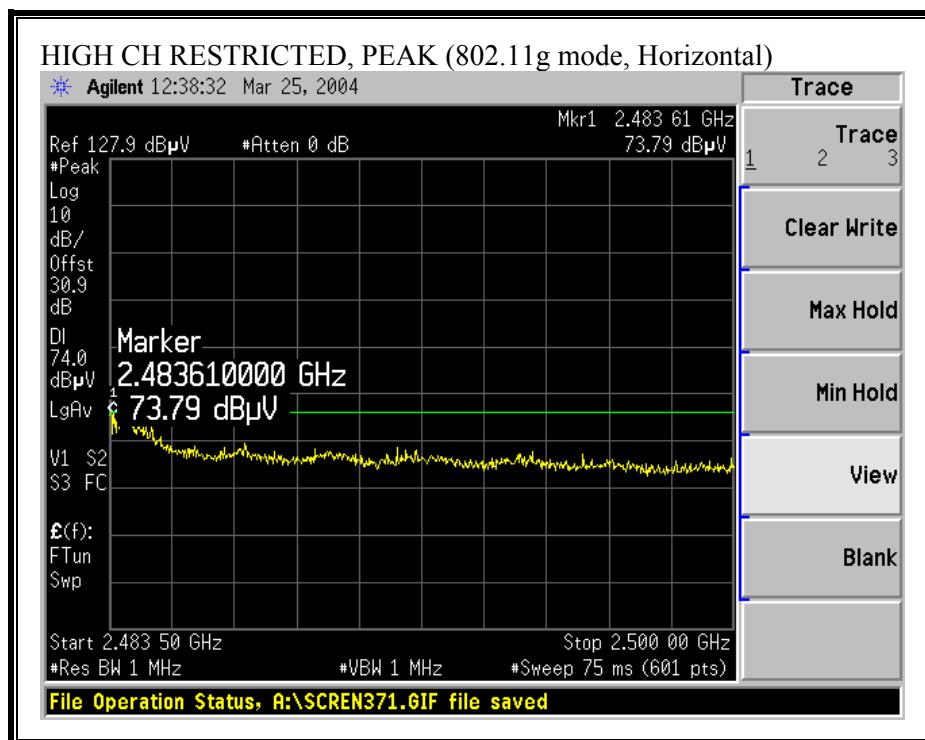

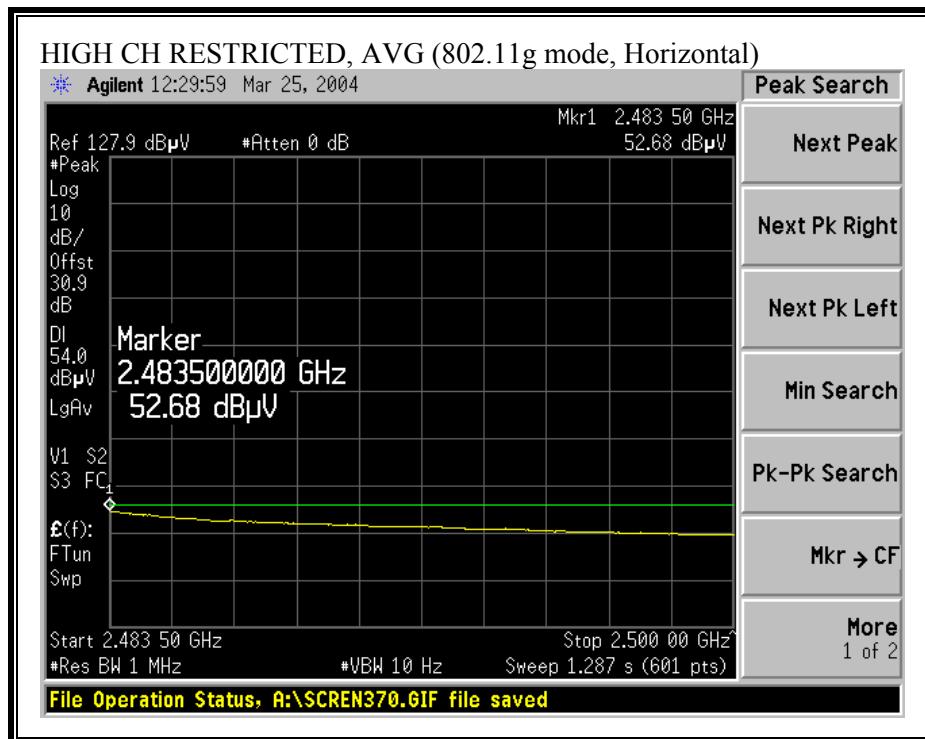

**RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)**

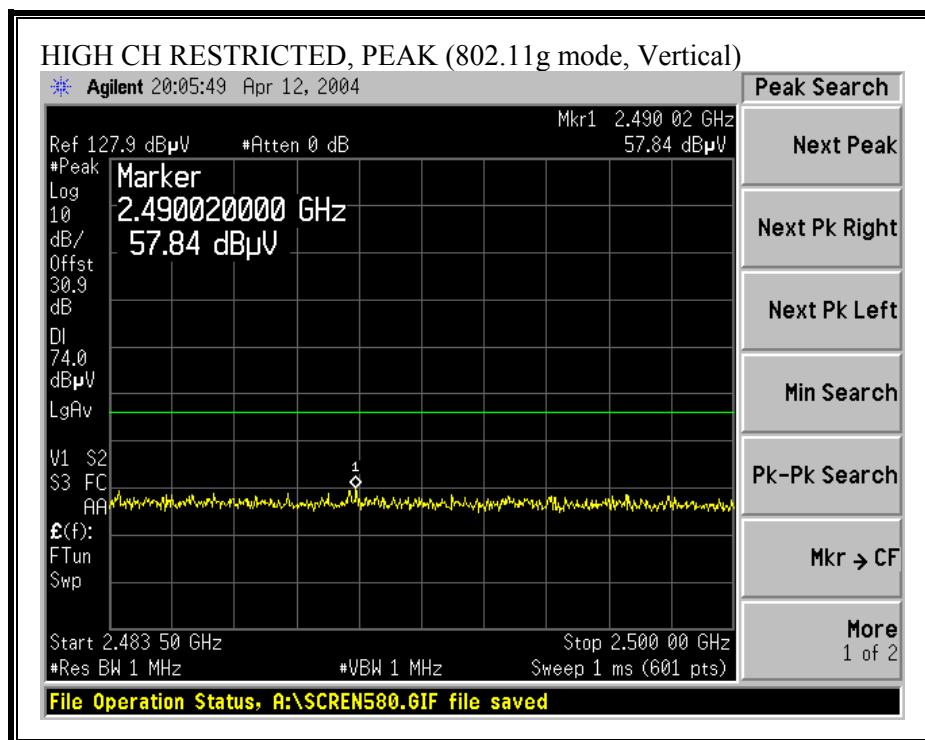

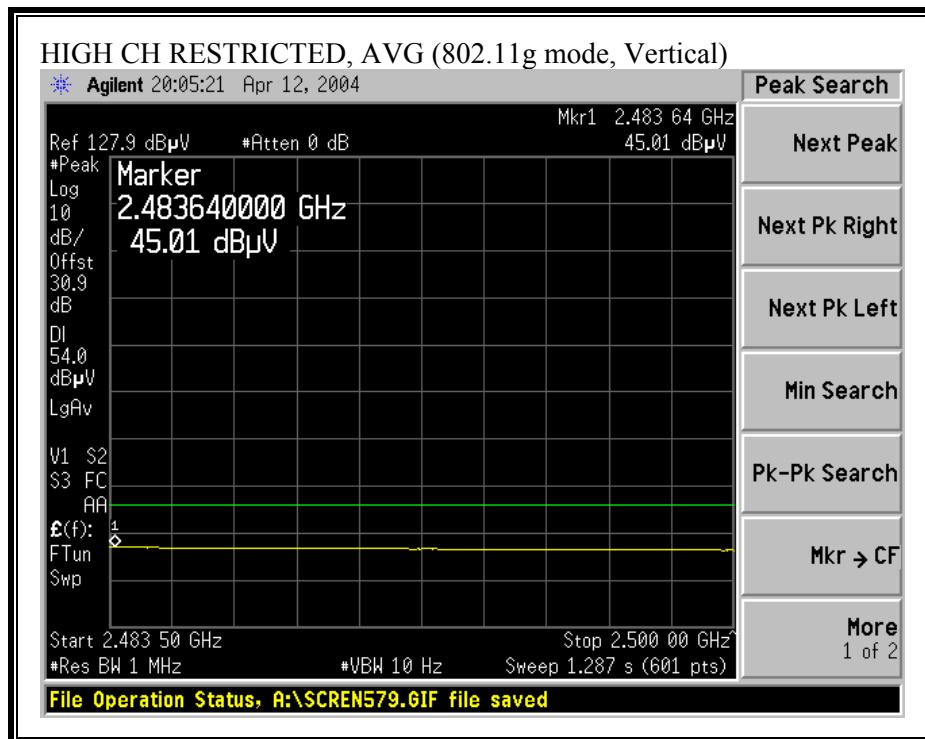

## HARMONICS AND SPURIOUS EMISSIONS (INTEGRATED PANEL ANTENNA)

03/26/04 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site																				
Test Engr:	Frank Ibrahim	Project #:	04U2601-2	Company:	KarlNet	EUT Descrip.:	802.11 b/g Integrated Satellite Unit	EUT M/N:	WBS	Test Target:	FCC 15.247	Mode Oper:	TX ON							
Test Equipment:	EMCO Horn 1-18GHz	Spectrum Analyzer	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn >18GHz															
T73; S/N: 6717 @3m	Agilent EA446A Analyzer	T63 Miteq 646456	T88 Miteq 16-40GHz	T87; ARA 18-26GHz; S/N:1049																
Hi Frequency Cables																				
<input type="checkbox"/> (2 ft)	<input checked="" type="checkbox"/> (2 ~ 3 ft)	<input type="checkbox"/> (4 ~ 6 ft)	<input checked="" type="checkbox"/> (12 ft)																	
<b>Peak Measurements:</b> 1 MHz Resolution Bandwidth 1MHz Video Bandwidth																				
<b>Average Measurements:</b> 1 MHz Resolution Bandwidth 10Hz Video Bandwidth																				
<b>f</b> GHz	<b>Dist</b> feet	<b>Read Pk</b> dBuV	<b>Read Avg.</b> dBuV	<b>AF</b> dB/m	<b>CL</b> dB	<b>Amp</b> dB	<b>D Corr</b> dB	<b>HPF</b>	<b>Peak</b> dBuV/m	<b>Avg</b> dBuV/m	<b>Pk Lim</b> dBuV/m	<b>Avg Lim</b> dBuV/m	<b>Pk Mar</b> dB	<b>Avg Mar</b> dB	<b>Notes</b>					
11b mode, 2412 MHz, w/ 18 dBi Integrated Panel Antenna																				
4.824	9.8	42.7	33.2	33.4	3.3	-35.3	0.0	1.0	45.1	35.6	74.0	54.0	<b>-28.9</b>	<b>-18.4</b>	H, noise floor					
Note: no signals were detected above noise floor in the freq range of 1-26 GHz																				
11b mode, 2437 MHz, w/ 18 dBi Integrated Panel Antenna																				
4.874	9.8	45.6	34.2	33.4	3.3	-35.3	0.0	1.0	48.1	36.7	74.0	54.0	<b>-25.9</b>	<b>-17.3</b>	H, noise floor					
7.311	9.8	41.8	30.9	35.8	4.2	-34.6	0.0	1.0	48.3	37.4	74.0	54.0	<b>-25.7</b>	<b>-16.6</b>	H, noise floor					
Note: no signals were detected above noise floor in the freq range of 1-26 GHz																				
11b mode, 2462 MHz, w/ 18 dBi Integrated Panel Antenna																				
4.924	9.8	45.7	35.1	33.5	3.4	-35.3	0.0	1.0	48.2	37.6	74.0	54.0	<b>-25.8</b>	<b>-16.4</b>	H, noise floor					
7.386	9.8	44.6	33.4	36.0	4.2	-34.5	0.0	1.0	51.3	40.1	74.0	54.0	<b>-22.7</b>	<b>-13.9</b>	H, noise floor					
Note: no signals were detected above noise floor in the freq range of 1-26 GHz																				
11g mode, 2412 MHz, w/ 18 dBi Integrated Panel Antenna																				
4.824	9.8	42.7	33.0	33.4	3.3	-35.3	0.0	1.0	45.1	35.4	74.0	54.0	<b>-28.9</b>	<b>-18.6</b>	H, noise floor					
Note: no signals were detected above noise floor in the freq range of 1-26 GHz																				
11g mode, 2437 MHz, w/ 18 dBi Integrated Panel Antenna																				
4.874	9.8	45.8	35.1	33.4	3.3	-35.3	0.0	1.0	48.3	37.6	74.0	54.0	<b>-25.7</b>	<b>-16.4</b>	H, noise floor					
7.311	9.8	41.3	33.1	35.8	4.2	-34.6	0.0	1.0	47.8	39.6	74.0	54.0	<b>-26.2</b>	<b>-14.4</b>	H, noise floor					
Note: no signals were detected above noise floor in the freq range of 1-26 GHz																				
11g mode, 2437 MHz, w/ 18 dBi Integrated Panel Antenna																				
4.924	9.8	46.9	34.8	33.5	3.4	-35.3	0.0	1.0	49.4	37.3	74.0	54.0	<b>-24.6</b>	<b>-16.7</b>	H, noise floor					
7.386	9.8	44.8	32.9	36.0	4.2	-34.5	0.0	1.0	51.5	39.6	74.0	54.0	<b>-22.5</b>	<b>-14.4</b>	H, noise floor					
Note: no signals were detected above noise floor in the freq range of 1-26 GHz																				
f	Measurement Frequency	Amp	Preamp Gain										Avg Lim	Average Field Strength Limit						
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters										Pk Lim	Peak Field Strength Limit						
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m										Avg Mar	Margin vs. Average Limit						
AF	Antenna Factor	Peak	Calculated Peak Field Strength										Pk Mar	Margin vs. Peak Limit						
CL	Cable Loss	HPF	High Pass Filter																	

**HARMONICS AND SPURIOUS EMISSIONS (EXTERNAL PATCH ANTENNA, b/g MODE)**


03/26/04 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site																																					
Test Engr:	Frank Ibrahim																																				
Project #:	04U2601-2																																				
Company:	KarlNet																																				
EUT Descrip.:	802.11 a/b/g Outdoor Base Station																																				
EUT M/N:	WBS																																				
Test Target:	FCC 15.247																																				
Mode Oper:	TX ON																																				
<b>Test Equipment:</b>																																					
EMCO Horn 1-18GHz			Spectrum Analyzer			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz																									
173; S/N: 6717 (@3m)			Agilent E4446A Analyzer			T63 Miteq 646456			T88 Miteq 16-40GHz			T87; ARA 18-26GHz; S/N:1049																									
Hi Frequency Cables																																					
<input type="checkbox"/> (2 ft) <input checked="" type="checkbox"/> (2 ~ 3 ft) <input type="checkbox"/> (4 ~ 6 ft) <input checked="" type="checkbox"/> (12 ft)					<b>Peak Measurements:</b> 1 MHz Resolution Bandwidth 1MHz Video Bandwidth																																
<b>Average Measurements:</b> 1 MHz Resolution Bandwidth 10Hz Video Bandwidth																																					
<b>f</b> GHz	<b>Dist</b> feet	<b>Read Pk</b> dBuV	<b>Read Avg.</b> dBuV	<b>AF</b> dB/m	<b>CL</b> dB	<b>Amp</b> dB	<b>D Corr</b> dB	<b>HPF</b>	<b>Peak</b> dBuV/m	<b>Avg</b> dBuV/m	<b>Pk Lim</b> dBuV/m	<b>Avg Lim</b> dBuV/m	<b>Pk Mar</b> dB	<b>Avg Mar</b> dB	<b>Notes</b>																						
11b mode, 2412 MHz, w/ 19 dBi Panel Antenna																																					
4.824	9.8	45.6	33.1	33.4	3.3	-35.3	0.0	1.0	48.0	35.5	74.0	54.0	-26.0	-18.5	H, noise floor																						
Note: no signals were detected above noise floor in the freq range of 1-26 GHz																																					
11b mode, 2437 MHz, w/ 19 dBi Panel Antenna																																					
4.874	9.8	43.2	33.9	33.4	3.3	-35.3	0.0	1.0	45.7	36.4	74.0	54.0	-28.3	-17.6	H, noise floor																						
7.311	9.8	44.8	33.5	35.8	4.2	-34.6	0.0	1.0	51.3	40.0	74.0	54.0	-22.7	-14.0	H, noise floor																						
Note: no signals were detected above noise floor in the freq range of 1-26 GHz																																					
11b mode, 2462 MHz, w/ 19 dBi Panel Antenna																																					
4.924	9.8	45.8	34.9	33.5	3.4	-35.3	0.0	1.0	48.3	37.4	74.0	54.0	-25.7	-16.6	H, noise floor																						
7.386	9.8	42.6	32.5	36.0	4.2	-34.5	0.0	1.0	49.3	39.2	74.0	54.0	-24.7	-14.8	H, noise floor																						
Note: no signals were detected above noise floor in the freq range of 1-26 GHz																																					
11g mode, 2417 MHz, w/ 19 dBi Panel Antenna																																					
4.834	9.8	43.5	33.3	33.4	3.3	-35.3	0.0	1.0	45.9	35.7	74.0	54.0	-28.1	-18.3	H, noise floor																						
7.251	9.8	40.4	30.3	35.7	4.2	-34.6	0.0	1.0	46.7	36.6	74.0	54.0	-27.3	-17.4	H, noise floor																						
Note: no signals were detected above noise floor in the freq range of 1-26 GHz																																					
11g mode, 2437 MHz, w/ 19 dBi Panel Antenna																																					
4.874	9.8	44.3	34.5	33.3	3.3	-35.3	0.0	1.0	46.8	37.0	74.0	54.0	-27.2	-17.0	H, noise floor																						
7.311	9.8	43.2	32.6	35.8	4.2	-34.6	0.0	1.0	49.7	39.1	74.0	54.0	-24.3	-14.9	H, noise floor																						
Note: no signals were detected above noise floor in the freq range of 1-26 GHz																																					
11g mode, 2462 MHz, w/ 19 dBi Panel Antenna																																					
4.924	9.8	44.5	34.2	33.5	3.4	-35.3	0.0	1.0	47.0	36.7	74.0	54.0	-27.0	-17.3	H, noise floor																						
7.386	9.8	43.5	33.2	36.0	4.2	-34.5	0.0	1.0	50.2	39.9	74.0	54.0	-23.8	-14.1	H, noise floor																						
Note: no signals were detected above noise floor in the freq range of 1-26 GHz																																					
f Measurement Frequency								Amp Preamp Gain								Avg Lim Average Field Strength Limit																					
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Avg	Average Field Strength @ 3 m	Peak	Calculated Peak Field Strength	Pk Lim	Peak Field Strength Limit	Avg Mar	Margin vs. Average Limit	Pk Mar	Margin vs. Peak Limit																								
Read	Analyzer Reading	HPF	High Pass Filter																																		
Read	Analyzer Reading	HPF	High Pass Filter																																		
AF	Antenna Factor																																				
CL	Cable Loss																																				

**HARMONICS AND SPURIOUS EMISSIONS (EXTERNAL ANTENNAS, a MODE)**

03/26/04 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site																
Test Engr:	Frank Ibrahim															
Project #:	04U2601-2															
Company:	KarlNet															
EUT Descrip.:	802.11 a/b/g Outdoor Base Station															
EUT M/N:	WBS															
Test Target:	FCC 15.247															
Mode Oper:	TX ON															
Test Equipment:																
EMCO Horn 1-18GHz																
173; S/N: 6717 (@3m																
Spectrum Analyzer																
Agilent E4446A Analyzer																
Pre-amplifier 1-26GHz																
T63 Miteq 646456																
Pre-amplifier 26-40GHz																
T88 Miteq 16-40GHz																
Horn > 18GHz																
T87; ARA 18-26GHz; S/N:1049																
Hi Frequency Cables																
<input type="checkbox"/> (2 ft)	<input checked="" type="checkbox"/> (2 ~ 3 ft)	<input type="checkbox"/> (4 ~ 6 ft)	<input checked="" type="checkbox"/> (12 ft)													
Peak Measurements:																
1 MHz Resolution Bandwidth																
1MHz Video Bandwidth																
Average Measurements:																
1 MHz Resolution Bandwidth																
10Hz Video Bandwidth																
<b>f</b>	<b>Dist</b>	<b>Read Pk</b>	<b>Read Avg.</b>	<b>AF</b>	<b>CL</b>	<b>Amp</b>	<b>D Corr</b>	<b>HPF</b>	<b>Peak</b>	<b>Avg</b>	<b>Pk Lim</b>	<b>Avg Lim</b>	<b>Pk Mar</b>	<b>Avg Mar</b>	<b>Notes</b>	
GHz	feet	dBuV	dBuV	dB/m	dB	dB	dB		dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB		
11a mode, 5745 MHz, w/ 24 dBi Dish Antenna																
11.490	9.8	40.4	30.6	38.8	5.7	-34.2	0.0	1.0	51.7	41.9	74.0	54.0	-22.3	-12.1	H, noise floor	
22.980	9.8	43.5	33.2	36.3	8.5	-40.6	0.0	1.0	48.6	38.3	74.0	54.0	-25.4	-15.7	H, noise floor	
Note: no signals were detected above noise floor in the freq range of 1-40 GHz																
11a mode, 5785 MHz, w/ 24 dBi Dish Antenna																
11.570	9.8	41.4	31.2	38.8	5.7	-34.3	0.0	1.0	52.7	42.5	74.0	54.0	-21.3	-11.5	H, noise floor	
Note: no signals were detected above noise floor in the freq range of 1-40 GHz																
11a mode, 5825 MHz, w/ 24 dBi Dish Antenna																
11.650	9.8	41.9	30.7	38.9	5.8	-34.4	0.0	1.0	53.2	42.0	74.0	54.0	-20.8	-12.0	H, noise floor	
Note: no signals were detected above noise floor in the freq range of 1-40 GHz																
11a mode, 5745 MHz, w/ 18 dBi Panel Antenna																
11.490	9.8	39.8	30.4	38.8	5.7	-34.2	0.0	1.0	51.1	41.7	74.0	54.0	-22.9	-12.3	H, noise floor	
22.980	9.8	44.1	32.5	36.3	8.5	-40.6	0.0	1.0	49.2	37.6	74.0	54.0	-24.8	-16.4	H, noise floor	
Note: no signals were detected above noise floor in the freq range of 1-40 GHz																
11a mode, 5785 MHz, w/ 18 dBi Panel Antenna																
11.570	9.8	40.8	31.7	38.8	5.7	-34.3	0.0	1.0	52.1	43.0	74.0	54.0	-21.9	-11.0	H, noise floor	
Note: no signals were detected above noise floor in the freq range of 1-40 GHz																
11a mode, 5825 MHz, w/ 218 dBi Panel Antenna																
11.650	9.8	41.8	30.4	38.9	5.8	-34.4	0.0	1.0	53.1	41.7	74.0	54.0	-20.9	-12.3	H, noise floor	
Note: no signals were detected above noise floor in the freq range of 1-40 GHz																
f	Measurement Frequency	Amp	Preamp Gain													
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters													
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m													
AF	Antenna Factor	Peak	Calculated Peak Field Strength													
CL	Cable Loss	HPF	High Pass Filter													
Avg Lim	Average Field Strength Limit															
Pk Lim	Peak Field Strength Limit															
Avg Mar	Margin vs. Average Limit															
Pk Mar	Margin vs. Peak Limit															

### 7.8.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

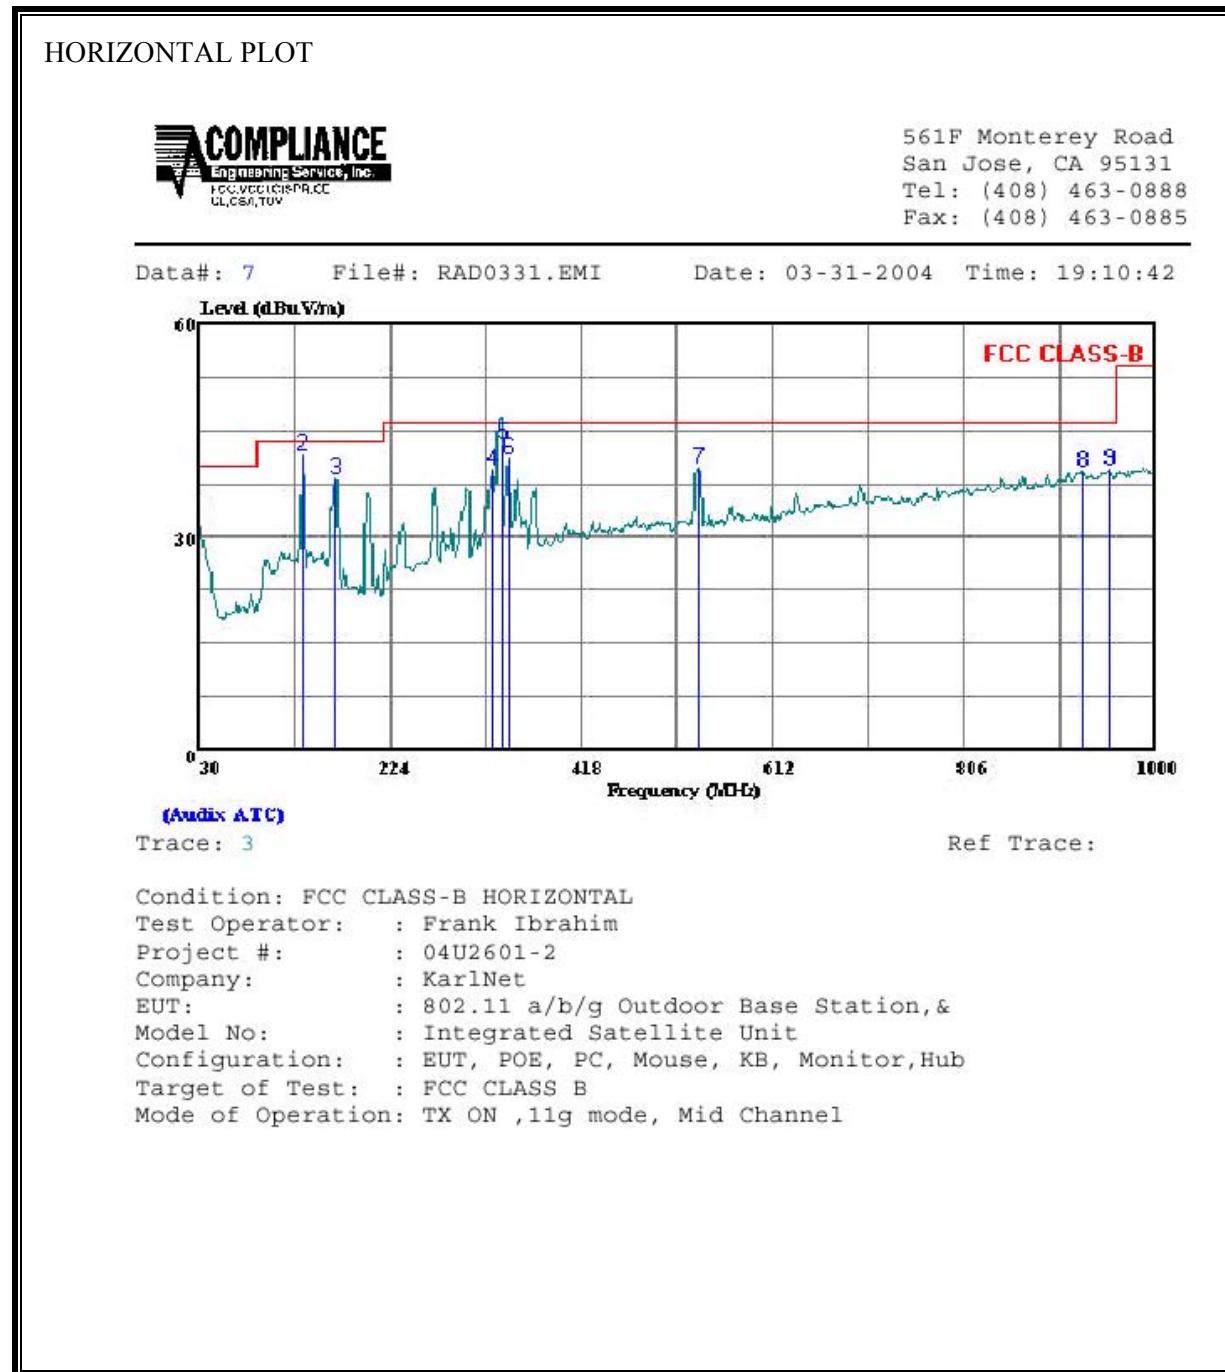

HORIZONTAL DATA

Freq	Remark	Read		Limit		Over Line Limit
		Level	Factor	Level	dBuV/m	
	MHz		dBuV	dB	dBuV/m	dB
1	30.000 Peak	10.27	22.95	33.22	40.00	-6.78
2	135.730 Peak	26.11	15.39	41.50	43.50	-2.00
3	167.740 Peak	24.44	13.61	38.05	43.50	-5.45
4	327.790 Peak	23.06	16.40	39.46	46.00	-6.54
5	337.490 QP	26.59	16.61	43.20	46.00	-2.80
6	344.280 Peak	24.31	16.76	41.07	46.00	-4.93
7	536.340 Peak	18.69	20.99	39.68	46.00	-6.32
8	926.280 Peak	12.48	26.76	39.24	46.00	-6.76


**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTCIAL)**

VERTICAL PLOT



561F Monterey Road  
San Jose, CA 95131  
Tel: (408) 463-0888  
Fax: (408) 463-0885

Data#: 2 File#: RAD0331.EMI Date: 03-31-2004 Time: 19:06:16

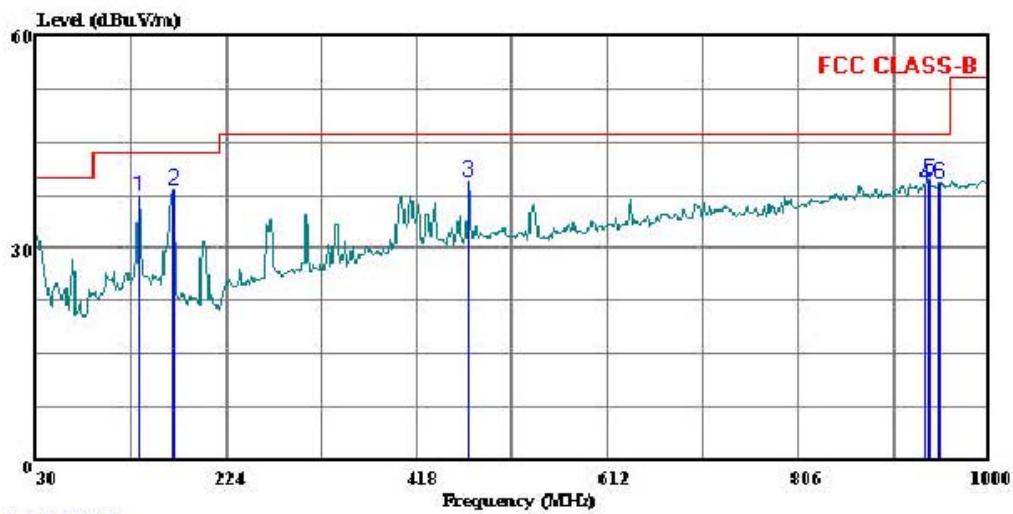

**(Audit ATC)**

Trace: 1

Ref Trace:

Condition: FCC CLASS-B VERTICAL  
Test Operator: : Frank Ibrahim  
Project #: : 04U2601-2  
Company: : KarlNet  
EUT: : 802.11 a/b/g Outdoor Base Station, &  
Model No: : Integrated Satellite Unit  
Configuration: : EUT, POE, PC, Mouse, KB, Monitor, Hub  
Target of Test: : FCC CLASS B  
Mode of Operation: TX ON , 11g mode, Mid Channel

VERTICAL DATA

Freq	Remark	Read		Limit		Over Limit
		Level	Factor	Level	Line	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB
1	135.730 Peak	21.96	15.39	37.35	43.50	-6.15
2	169.680 Peak	24.79	13.51	38.30	43.50	-5.20
3	470.380 Peak	19.47	19.92	39.39	46.00	-6.61
4	934.040 Peak	12.23	26.81	39.04	46.00	-6.96
5	938.890 Peak	13.03	26.84	39.87	46.00	-6.13
6	950.530 Peak	12.33	26.89	39.22	46.00	-6.78

## 7.9. POWERLINE CONDUCTED EMISSIONS

### LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 <sup>*</sup>	56 to 46 <sup>*</sup>
0.5-5	56	46
5-30	60	50

<sup>\*</sup> Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.

### RESULTS


No non-compliance noted:

## **6 WORST EMISSIONS**

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq. (MHz)	Reading			Closs (dB)	Limit QP	EN B AV	Margin		Remark L1 / L2
	PK (dBuV)	QP (dBuV)	AV (dBuV)				QP (dB)	AV (dB)	
0.20	42.66	--	--	0.00	64.51	54.51	-21.85	-11.85	L1
1.88	36.90	--	--	0.00	56.00	46.00	-19.10	-9.10	L1
12.72	34.98	--	--	0.00	60.00	50.00	-25.02	-15.02	L1
0.20	41.64	--	--	0.00	64.51	54.51	-22.87	-12.87	L2
1.88	37.34	--	--	0.00	56.00	46.00	-18.66	-8.66	L2
12.72	34.96	--	--	0.00	60.00	50.00	-25.04	-15.04	L2
6 Worst Data									


Radio Module

**LINE 1 AND LINE 2 RESULTS (RADIO MODULE)**

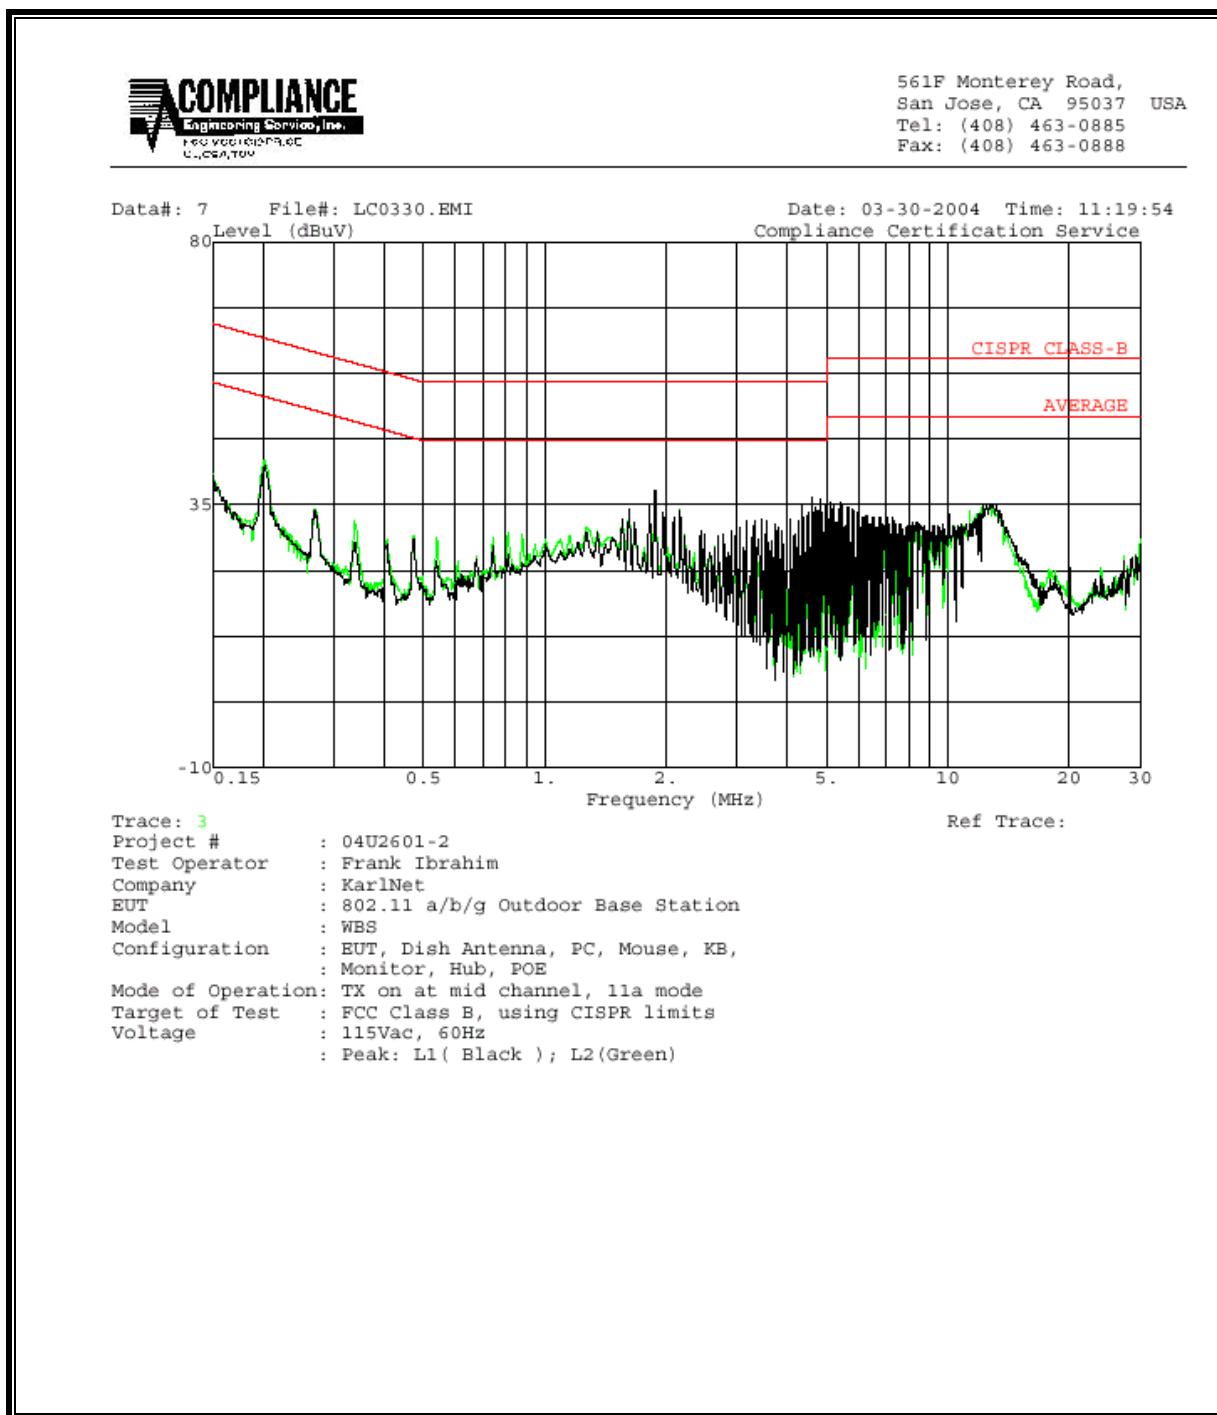

## 8. SETUP PHOTOS

### ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

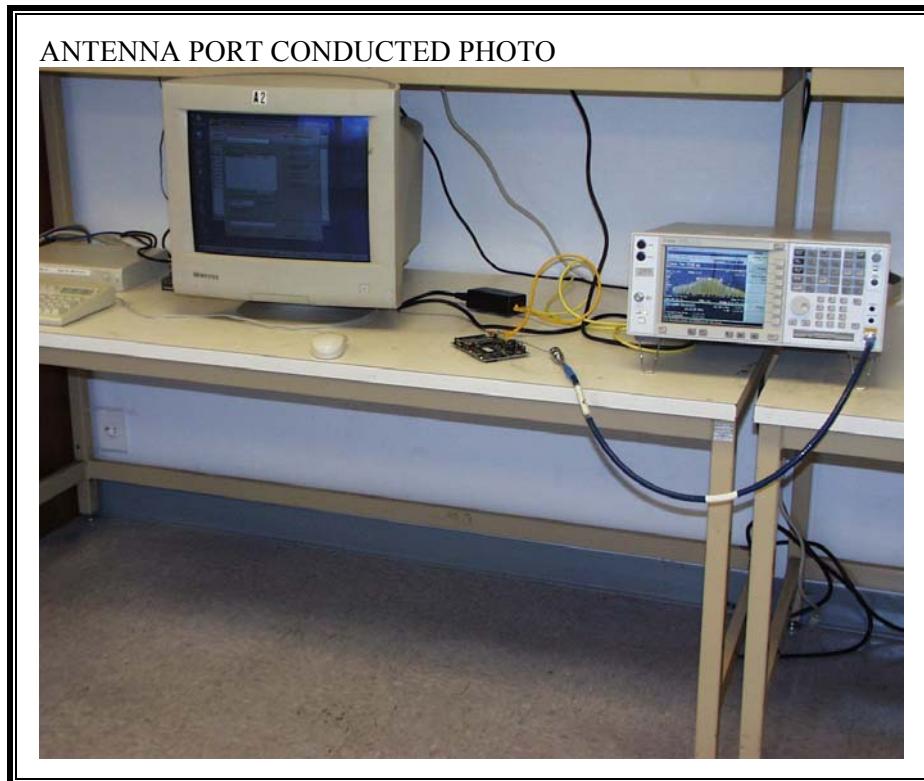


**RADIATED RF MEASUREMENT SETUP**


RADIATED FRONT PHOTO / INTEGRATED 18 dBi PANEL  
ANTENNA



RADIATED BACK PHOTO / INTEGRATED 18 dBi PANEL  
ANTENNA



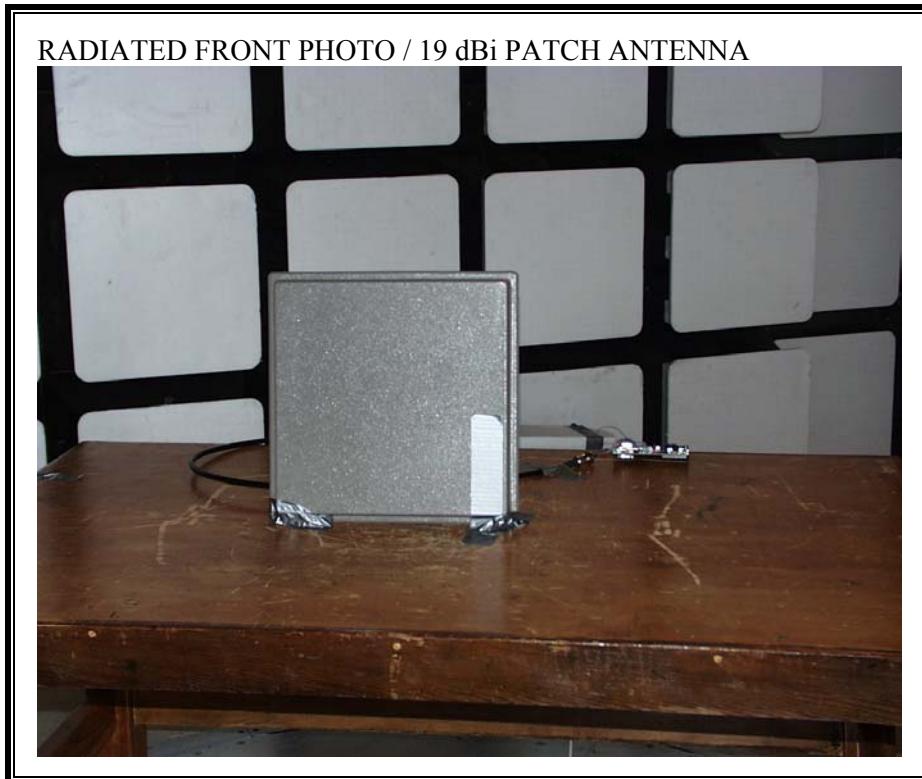


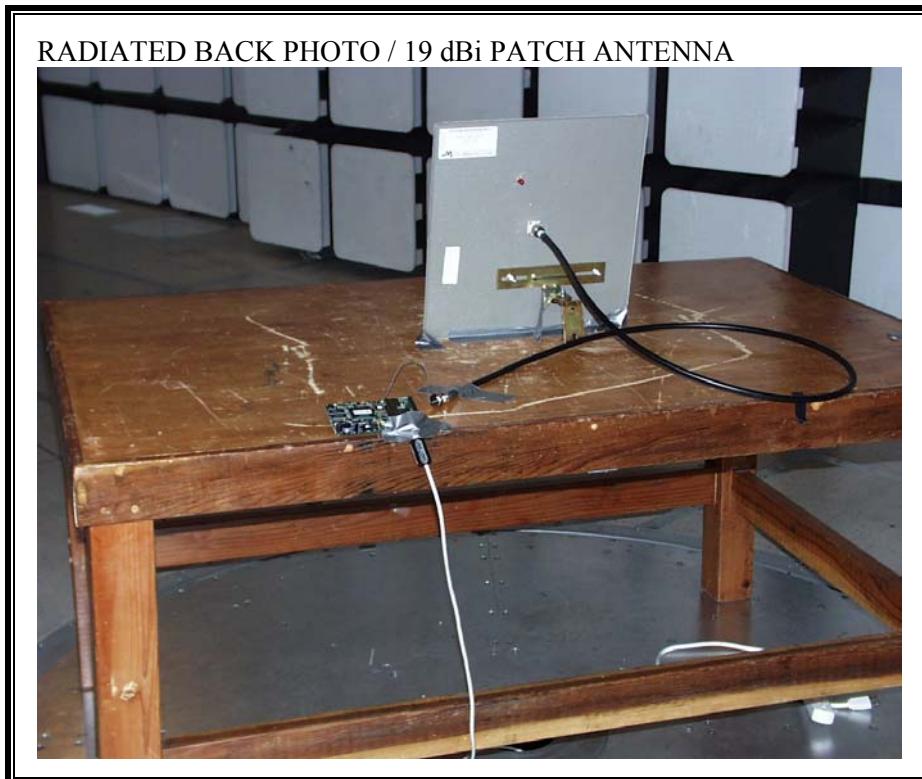

RADIATED FRONT PHOTO / 18 dBi PANEL ANTENNA




RADIATED BACK PHOTO / 18 dBi PANEL ANTENNA

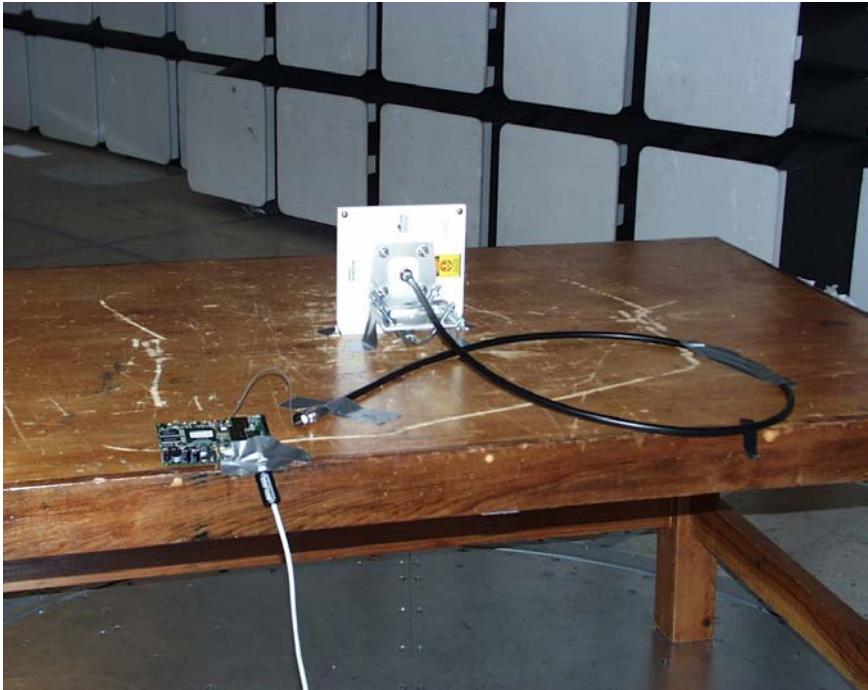

RADIATED FRONT PHOTO / 24 dBi DISH ANTENNA




RADIATED BACK PHOTO / 24 dBi DISH ANTENNA

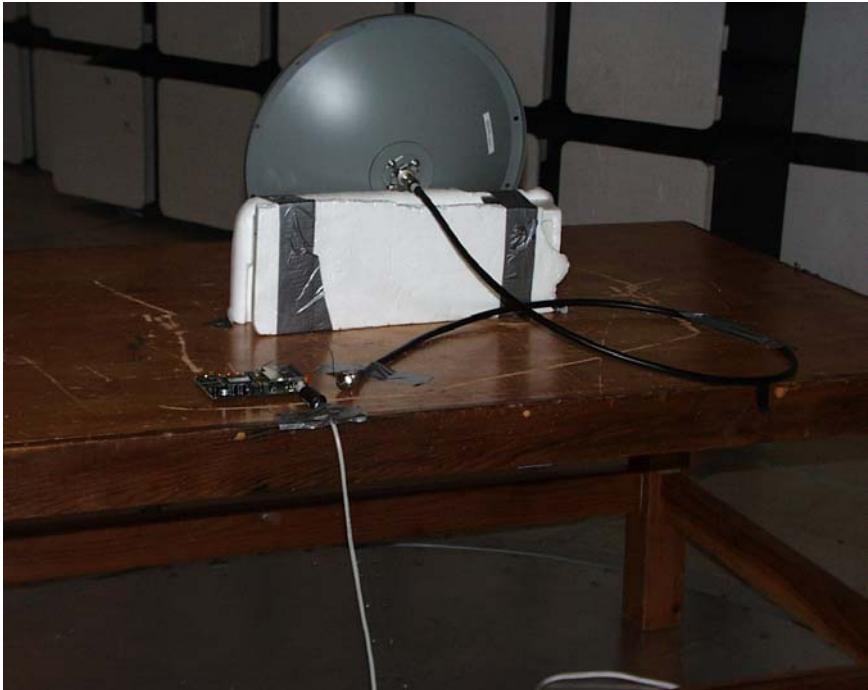

**POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP**



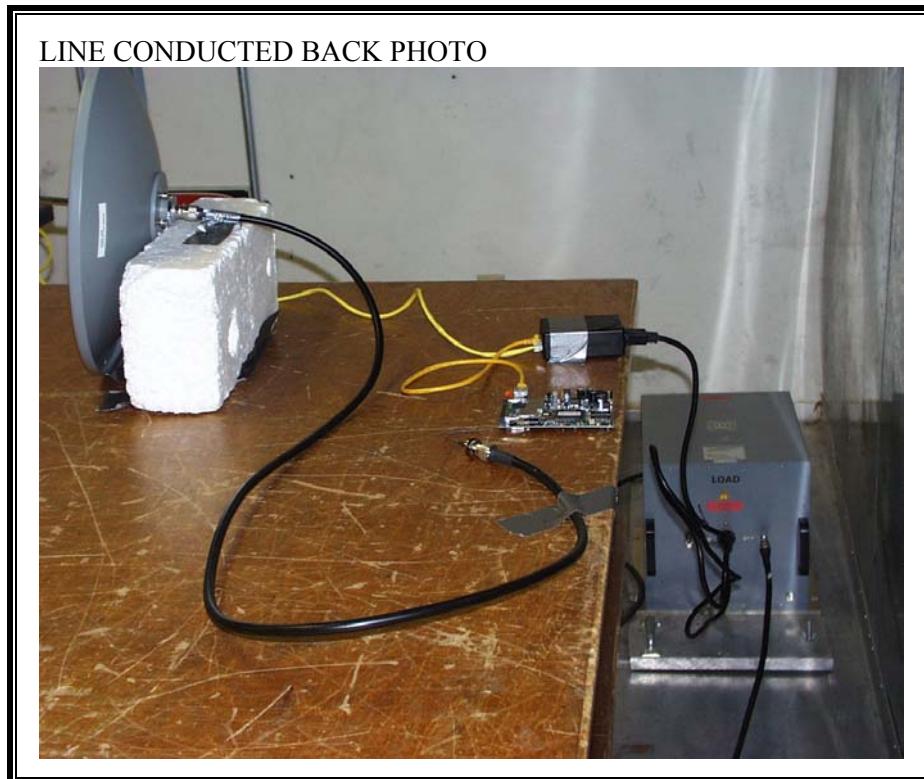

**END OF REPORT**