



A D T

CANADA TEST REPORT

REPORT NO.: IC980119H03A

MODEL NO.: E2100L

RECEIVED: Jan. 14, 2009

TESTED: Jan. 14 to Feb. 05, 2009

ISSUED: Dec. 17, 2009

APPLICANT: Cisco-Linksys LLC

ADDRESS: 121 Theory Drive Irvine, CA 92617 (USA)

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.)
Ltd., Taoyuan Branch Hsin Chu Laboratory

ADDRESS: No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

This test report consists of 124 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





TABLE OF CONTENTS

1.	CERTIFICATION.....	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	6
3.	GENERAL INFORMATION.....	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES	9
3.2.1	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	10
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	13
3.4	DESCRIPTION OF SUPPORT UNITS.....	14
3.5	CONFIGURATION OF SYSTEM UNDER TEST.....	15
4.	TEST TYPES AND RESULTS	17
4.1	CONDUCTED EMISSION MEASUREMENT.....	17
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	17
4.1.2	TEST INSTRUMENTS.....	18
4.1.3	TEST PROCEDURES	19
4.1.4	DEVIATION FROM TEST STANDARD	19
4.1.5	TEST SETUP.....	20
4.1.6	EUT OPERATING CONDITIONS.....	20
4.1.7	TEST RESULTS-ADAPTER 1	21
4.1.8	TEST RESULTS-ADAPTER 2	23
4.2	RADIATED EMISSION MEASUREMENT	25
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	25
4.2.2	TEST INSTRUMENTS.....	26
4.2.3	TEST PROCEDURES	27
4.2.4	DEVIATION FROM TEST STANDARD	27
4.2.5	TEST SETUP.....	28
4.2.6	EUT OPERATING CONDITIONS.....	28
4.2.7	TEST RESULTS (FOR TRANSMITTER PART).....	29
4.2.8	TEST RESULTS – Above 1GHz	30
4.2.9	TEST RESULTS (FOR RECEIVER PART)	58
4.2.10	TEST RESULTS – Above 1GHz	59
4.3	6dB BANDWIDTH MEASUREMENT	62
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT.....	62
4.3.2	TEST INSTRUMENTS.....	62
4.3.3	TEST PROCEDURE	62
4.3.4	DEVIATION FROM TEST STANDARD	62
4.3.5	TEST SETUP.....	63



4.3.6	EUT OPERATING CONDITIONS.....	63
4.3.7	TEST RESULTS	64
4.4	20dB BANDWIDTH MEASUREMENT	76
4.4.1	TEST INSTRUMENTS.....	76
4.4.2	TEST PROCEDURE	77
4.4.3	TEST SETUP	77
4.4.4	EUT OPERATING CONDITIONS.....	77
4.4.5	TEST RESULTS	78
4.5	MAXIMUM PEAK OUTPUT POWER.....	90
4.5.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT.....	90
4.5.2	INSTRUMENTS	90
4.4.3	TEST PROCEDURES	90
4.4.4	DEVIATION FROM TEST STANDARD	90
4.4.5	TEST SETUP.....	91
4.4.6	EUT OPERATING CONDITIONS.....	91
4.4.7	TEST RESULTS	92
4.6	POWER SPECTRAL DENSITY MEASUREMENT	94
4.6.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	94
4.6.2	TEST INSTRUMENTS.....	94
4.6.3	TEST PROCEDURE	94
4.6.4	DEVIATION FROM TEST STANDARD	94
4.6.5	TEST SETUP	95
4.6.6	EUT OPERATING CONDITION.....	95
4.6.7	TEST RESULTS	96
4.7	CONDUCTED EMISSION AND BAND EDGES MEASUREMENT	108
4.7.1	LIMITS OF CONDTCTED EMISSION AND BAND EDGES MEASUREMENT	108
4.7.2	TEST INSTRUMENTS.....	108
4.7.3	TEST PROCEDURE	108
4.7.4	DEVIATION FROM TEST STANDARD	109
4.7.5	EUT OPERATING CONDITION.....	109
4.7.6	TEST RESULTS	109
4.8	ANTENNA REQUIREMENT.....	122
4.8.1	STANDARD APPLICABLE.....	122
4.8.2	ANTENNA CONNECTED CONSTRUCTION.....	122
5.	INFORMATION ON THE TESTING LABORATORIES.....	123
6.	APPENDIX - A MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	124




A D T

1. CERTIFICATION

PRODUCT : Wireless-N Broadband Router with Storage Link
MODEL NO.: E2100L
BRAND : Linksys
APPLICANT : Cisco-Linksys LLC
TESTED : Jan. 14 to Feb. 05, 2009
TEST SAMPLE : ENGINEERING SAMPLE
STANDARDS : FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003
Canada RSS-210 issue 7
Canada RSS-Gen issue 2

The above equipment (Model: E2100L) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , **DATE:** Dec 17, 2009
(Claire Kuan, Specialist)

TECHNICAL ACCEPTANCE :  , **DATE:** Dec 17, 2009
(Hank Chung, Deputy Manager)

APPROVED BY :  , **DATE:** Dec 17, 2009
(May Chen, Deputy Manager)



A D T

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C ; RSS-210; RSS-Gen					
Standard Section			Test Type and Limit	Result	REMARK
RSS-210	RSS-Gen	47 CFR Part 15			
-	7.2.2	15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -10.84dB at 0.188MHz.
A8.2(a)	4.6	15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
A8.4(4)	4.8	15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
A8.5	4.9	15.247(c)	Transmitter Radiated Emissions FCC Limit: Table 15.209 RSS-210 Limit: Table 2	PASS	Meet the requirement of limit. Minimum passing margin is -0.90dB at 4874.00MHz.
-	6	-	Receiver Radiated Emissions RSS-210 Limit: Table 2	PASS	Meet the requirement of limit Minimum passing margin is -1.38dB at 250.00MHz
A8.2(b)	-	15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
A8.5	-	15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.44 dB
Radiated emissions (30MHz-1GHz)	3.94 dB
Radiated emissions (1GHz -18GHz)	2.33 dB
Radiated emissions (18GHz -40GHz)	2.56 dB



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless-N Broadband Router with Storage Link
MODEL NO.	E2100L
IC ID	3839A-E2100L
POWER SUPPLY	DC 12V from adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11 / 5.5 / 2 / 1Mbps 802.11g: 54 / 48 / 36 / 24 / 18 / 12 / 9 / 6Mbps Draft 802.11n (20MHz, 800ns GI): 65 / 58.5 / 52 / 39 / 26 / 19.5 / 13 / 6.5Mbps Draft 802.11n (40MHz, 800ns GI): 135 / 121.5 / 108 / 81 / 54 / 40.5 / 27 / 13.5Mbps Draft 802.11n (20MHz, 400ns GI): 72.2 / 65 / 57.8 / 43.3 / 28.9 / 21.7 / 14.4 / 7.2Mbps Draft 802.11n (40MHz, 400ns GI): 150 / 135 / 120 / 90 / 60 / 45 / 30 / 15Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11 for 802.11b, 802.11g, draft 802.11n (20MHz) 7 for draft 802.11n (40MHz)
MAXIMUM OUTPUT POWER	802.11b: 112.2mW 802.11g: 213.8mW draft 802.11n (20MHz): 376.8mW draft 802.11n (40MHz): 302.7mW
ANTENNA TYPE	Please see note 1
DATA CABLE	NA
I/O PORT	RJ-45(LAN) port x 4 RJ-45(WAN) port x 1 USB port x 1
ASSOCIATED DEVICES	Antenna x 2 Adapter x 1

NOTE:

1. There are two antennas provided to this EUT, please refer to the following table:

No.	Antenna Type	Gain (dBi)	Antenna Connector
1	Dipole	1.8	SAM male reverse
2	Dipole	1.8	SAM male reverse

2. The EUT must be supplied with a power adapter and following different models could be chosen:

Adapter 1	
Brand:	Bestec
Model No.:	NA0181WAA
Input power :	AC100-240V, 1A, 50-60Hz
Output power :	DC 12V, 1.5A DC output cable (Unshielded, 1.8m)
Adapter 2	
Brand:	LEI
Model No.:	MU18-D120150-A1
Input power :	AC100-240V, 0.6A, 50-60Hz
Output power :	DC 12V, 1.5A DC output cable (Unshielded, 1.8m)

From the above adapters, adapter 1 is the worse case one, Therefore only the test data of the adapter was recorded in this report individually.

3. The EUT was pre-tested in chamber under the following modes:

Test Mode	Description
Mode A	Level-set (Put on tabletop)
Mode B	Tower-set (Wall-mounted)

From the above modes, the worst case was found in **Mode A**. Therefore only the test data of the modes were recorded in this report.

4. The EUT incorporates a MIMO function with draft 802.11n. Physically, the card provides two completed transmitters and two completed receivers.
5. The EUT is 2 * 2 spatial MIMO without beam forming function. The antenna configurations are two transmitter antennas and two receiver antennas, as there are 2 dipole antennas. Spatial multiplexing modes for simultaneous transmission using 2 antennas, and for simultaneous receiver using 2 antennas.
6. When the EUT operating in draft 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 15.
7. The EUT complies with draft 802.11n standards and backwards compatible with 802.11b, 802.11g products.
8. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided for 802.11b, 802.11g, draft 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Seven channels are provided for draft 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2422MHz	5	2442MHz
2	2427MHz	6	2447MHz
3	2432MHz	7	2452MHz
4	2437MHz		



3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	
MODE 1	√	-	-	-	With adapter 1
MODE 2	√	√	√	√	With adapter 2

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz
RE ≥ 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement

ANTENNA COMBINATION MODE:

COMBINATION MODE	OPERATION MODE	TX CHAIN(0)	TX CHAIN(1)
A	802.11 b	ü	
B	802.11 g	ü	
C	DRAFT 802.11n(20MHz)	ü	ü
D	DRAFT 802.11n(40MHz)	ü	ü
COMBINATION MODE	OPERATION MODE	RX CHAIN(0)	RX CHAIN(1)
E	Receiver	ü	ü

Note:

- The above information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT CONFIGURE MODE
Draft 802.11n (20MHz)	1 to 11	11	OFDM	BPSK	6.5	MODE 1
Draft 802.11n (20MHz)	1 to 11	11	OFDM	BPSK	6.5	MODE 2

**RADIATED EMISSION TEST (BELOW 1 GHZ):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- The receiving mode had show equal or better than Tx mode during the pre-scan and hence the Tx mode data is re-used for Receiving-mode worst-case data.
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT CONFIGURE MODE
Draft 802.11n (20MHz)	1 to 11	11	OFDM	BPSK	6.5	MODE 2

RADIATED EMISSION TEST (ABOVE 1 GHZ):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT CONFIGURE MODE
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1	MODE 2
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	MODE 2
Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5	MODE 2
Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5	MODE 2
Receiver	1 to 11	1, 6, 11	-	-	-	MODE 2

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT CONFIGURE MODE
802.11b	1 to 11	1, 11	DSSS	DBPSK	1	MODE 2
802.11g	1 to 11	1, 11	OFDM	BPSK	6	MODE 2
Draft 802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	6.5	MODE 2
Draft 802.11n (40MHz)	1 to 7	1, 7	OFDM	BPSK	13.5	MODE 2



ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT CONFIGURE MODE
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1	MODE 2
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	MODE 2
Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5	MODE 2
Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5	MODE 2



A D T

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

Canada RSS-210 issue 7

Canada RSS-Gen issue 2

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


Conducted test					
NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PPT	17044664176	E2K24GBRL
2	NOTEBOOK COMPUTER	HP	HSTNN-S19C	JP96X-4Y88K-BXX Y8-K27B3-M86FT	FCC DoC
3	NuStreams	xtramus	NuStreams-600	05NS06C00004	NA
4	USB Flash Device	SanDisk	SDCZ2-512-A10	5482374371	FCC DoC
Other test					
NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP18L	6976685584	FCC DoC
2	NOTEBOOK COMPUTER	DELL	PP19L	CN-OHC416-70166 -5CA-0448	PIW632500516610
3	HUB	ZyXEL	ES-116P	S060H02000215	FCC DoC
4	USB Flash Device	MIN AIK	SHARK II	N/A	FCC DoC

Conducted test	
NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA
3	NA
4	NA
Other test	
NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA
3	NA
4	NA


NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

For Conducted test:

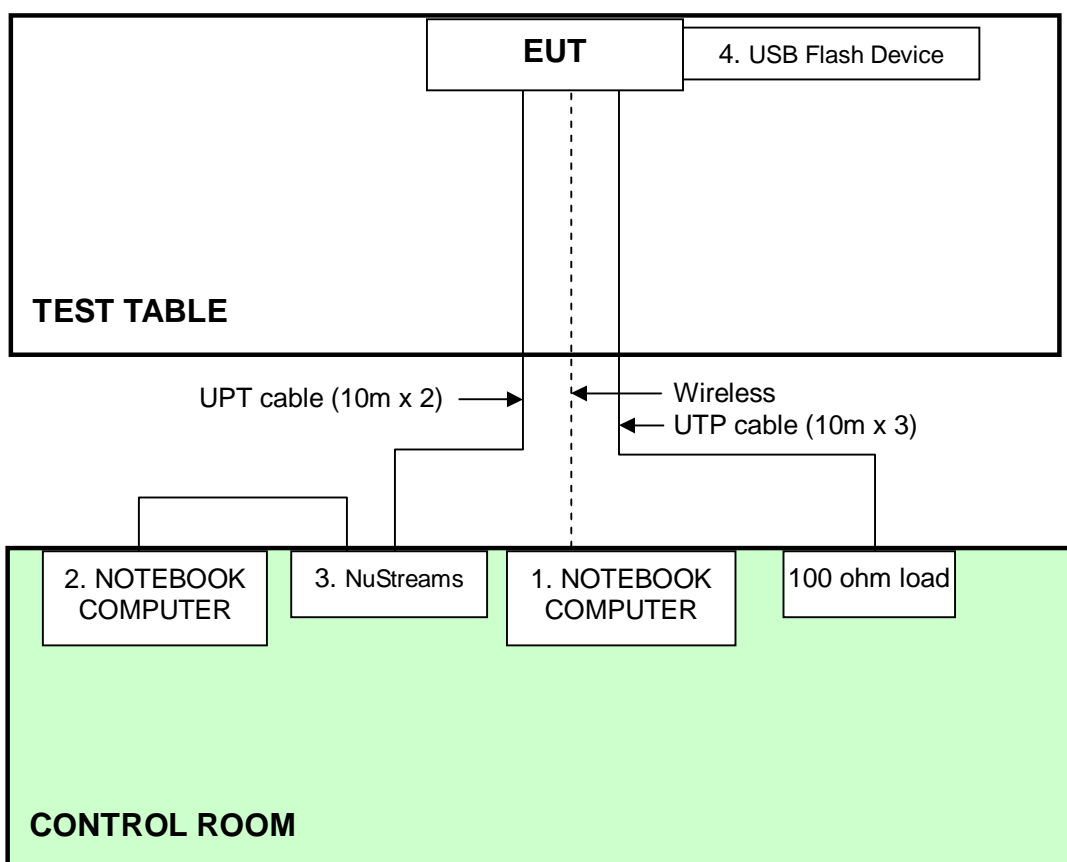

For other test:

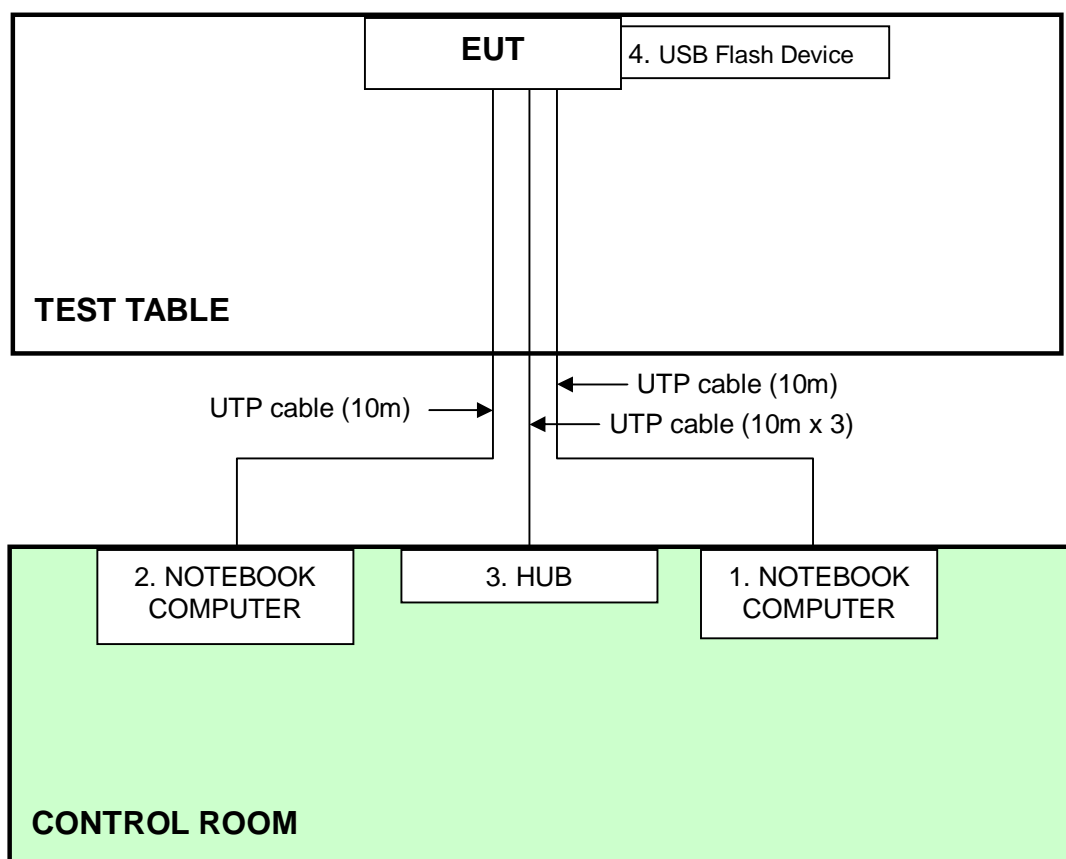



4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.



A D T

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	April 01, 2008	Mar. 31, 2009
Line-Impedance Stabilization Network (for EUT)	ENV-216	100071	Nov. 26, 2008	Nov. 25, 2009
Line-Impedance Stabilization Network (for Peripheral)	ESH3-Z5	848773/004	Nov. 05, 2008	Nov. 04, 2009
RF Cable (JYEBAO)	5DFB	COBCAB-001	Aug 15, 2008	Aug 14, 2009
50 ohms Terminator	50	3	Nov. 05, 2008	Nov. 04, 2009
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. B.
3. The VCCI Con B Registration No. is C-2193.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

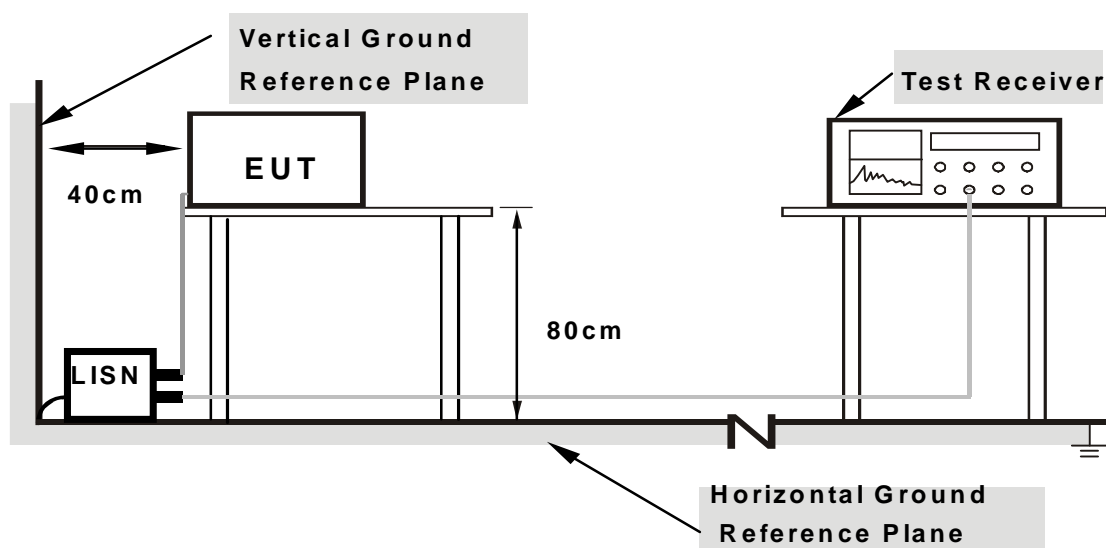

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

1. Placed the EUT on testing table.
2. Prepared other computer systems (support units 1 ~ 3) to act as communication partners and placed them outside of testing area.
3. The communication partners run test program “Nu-Lite.exe and Ping.exe” to enable EUT under transmission/receiving condition continuously via UTP cables and wireless transmission.




4.1.7 TEST RESULTS-ADAPTER 1

DRAFT 802.11N (20MHZ) OFDM MODULATION:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line (L)
MODULATION TYPE	OFDM	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.5Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 960hPa	TESTED BY	Andy Ho

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.150	9.67	39.84	-	49.51	-	66.00
2	0.185	9.69	33.71	-	43.40	-	64.25	54.25	-20.85	-
3	0.619	9.85	22.39	-	32.24	-	56.00	46.00	-23.76	-
4	2.430	9.73	17.39	-	27.12	-	56.00	46.00	-28.88	-
5	7.621	9.81	30.42	-	40.23	-	60.00	50.00	-19.77	-
6	18.367	9.94	28.42	-	38.36	-	60.00	50.00	-21.64	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

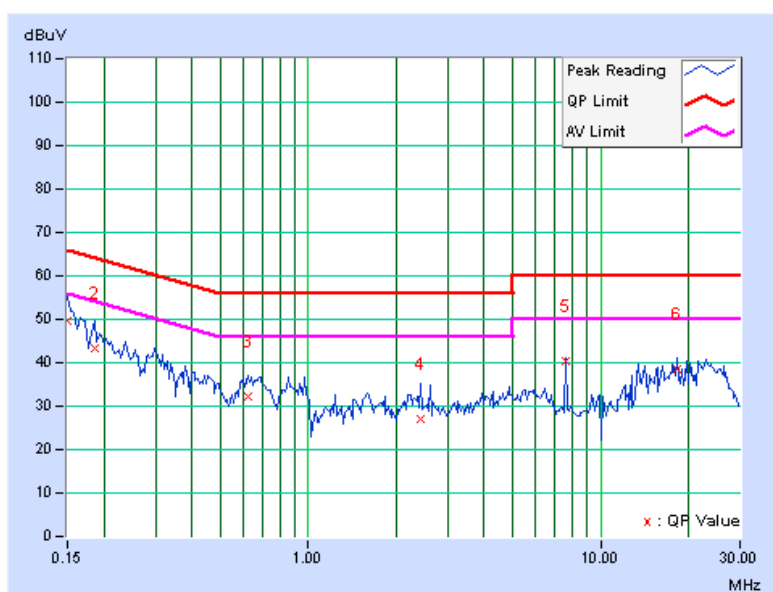




A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line (L)
MODULATION TYPE	OFDM	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.5Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 960hPa	TESTED BY	Andy Ho

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.158	9.67	37.74	-	47.41	-	65.58	55.58	-18.16
2	0.173	9.68	34.88	-	44.56	-	64.79	54.79	-20.23	-
3	0.572	9.86	18.86	-	28.72	-	56.00	46.00	-27.28	-
4	1.211	9.68	20.26	-	29.94	-	56.00	46.00	-26.06	-
5	7.623	9.83	30.22	-	40.05	-	60.00	50.00	-19.95	-
6	21.840	10.11	35.86	-	45.97	-	60.00	50.00	-14.03	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

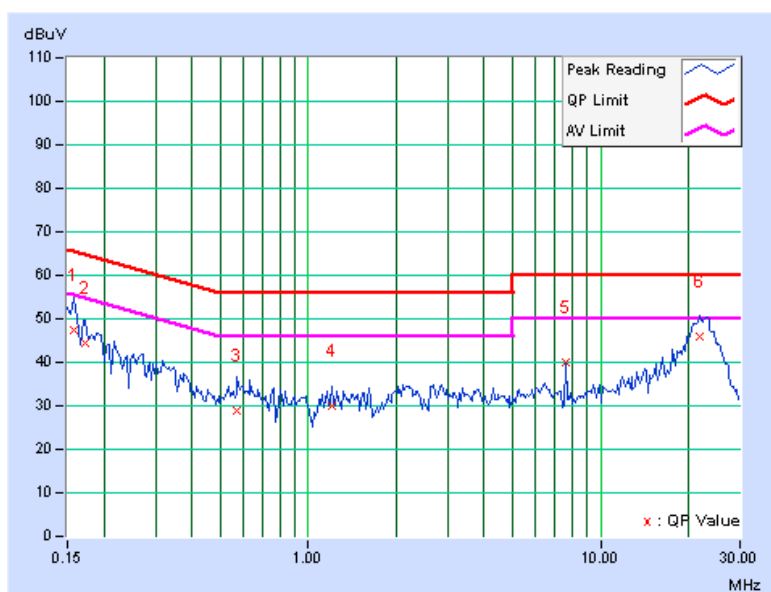


4.1.8 TEST RESULTS-ADAPTER 2

DRAFT 802.11N (20MHZ) OFDM MODULATION:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line (L)
MODULATION TYPE	OFDM	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.5Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 960hPa	TESTED BY	Andy Ho

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.150	9.67	41.36	-	51.03	-	66.00
2	0.191	9.69	42.42	-	52.11	-	64.01	54.01	-11.90	-
3	0.560	9.88	32.49	-	42.37	-	56.00	46.00	-13.63	-
4	7.622	9.81	29.49	-	39.30	-	60.00	50.00	-20.70	-
5	11.434	9.86	24.17	-	34.03	-	60.00	50.00	-25.97	-
6	23.128	9.97	34.24	-	44.21	-	60.00	50.00	-15.79	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

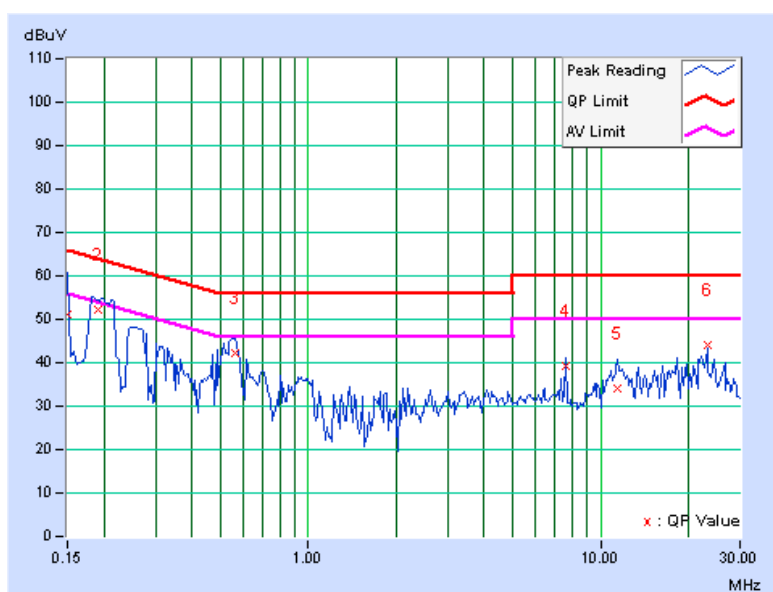

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line (L)
MODULATION TYPE	OFDM	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.5Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 960hPa	TESTED BY	Andy Ho

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.150	9.67	41.40	-	51.07	-	66.00	56.00	-14.93
2	0.188	9.69	43.58	-	53.27	-	64.11	54.11	-10.84	-
3	0.257	9.77	35.63	-	45.40	-	61.54	51.54	-16.14	-
4	0.562	9.87	31.90	-	41.77	-	56.00	46.00	-14.23	-
5	7.622	9.83	29.72	-	39.55	-	60.00	50.00	-20.45	-
6	23.129	10.12	34.12	-	44.24	-	60.00	50.00	-15.76	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

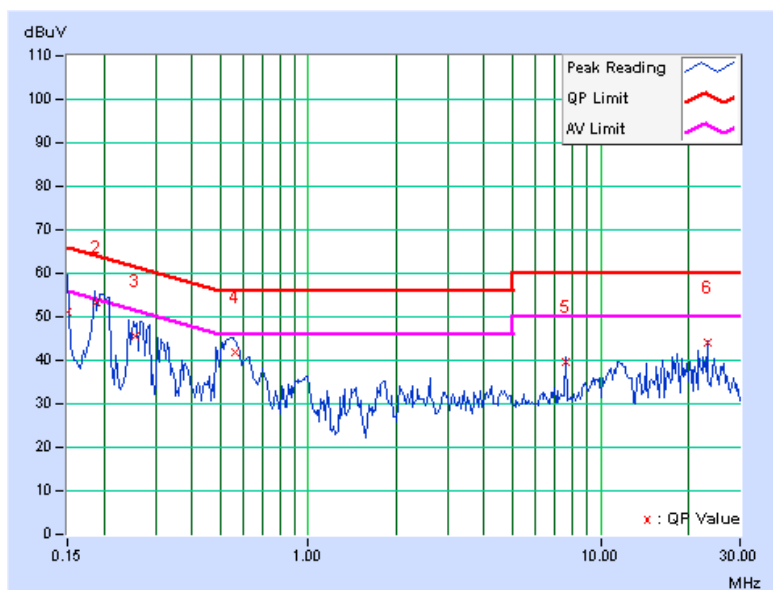

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 (RSS-210 table 2 & 3) as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400 / F(kHz)	300
0.490 ~ 1.705	24000 / F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ADVANTEST Spectrum Analyzer	R3271A	85060311	July 16, 2008	July 15, 2009
HP Pre_Amplifier	8449B	3008A0192 2	Sep. 25, 2008	Sep. 24, 2009
ROHDE & SCHWARZ Test Receiver	ESCS30	100375	April 01, 2008	Mar. 31, 2009
SCHWARZBECK TRILOG Broadband Antenna	VULB 9168	138	April 30, 2008	April 29, 2009
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 16, 2008	Dec. 15, 2009
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA91701 53	Jan. 27, 2009	Jan. 26, 2010
R&S Loop Antenna	HFH2-Z2	100070	Jan. 13, 2009	Jan. 12, 2010
RF Switches	EMH-011	08009	Oct. 07, 2008	Oct. 06, 2009
RF CABLE (Chaintek)	SF102	22054-2	Dec. 06, 2008	Dec. 05, 2009
RF Cable	8DFB	STCCAB-30 M-1GHz	Oct. 07, 2008	Oct. 06, 2009
Software	ADT_Radiated _V7.6.15.9.2	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, HP preamplifier (model: 8449B) and Spectrum Analyzer (model: R3271A) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in ADT Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 7450G-3.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

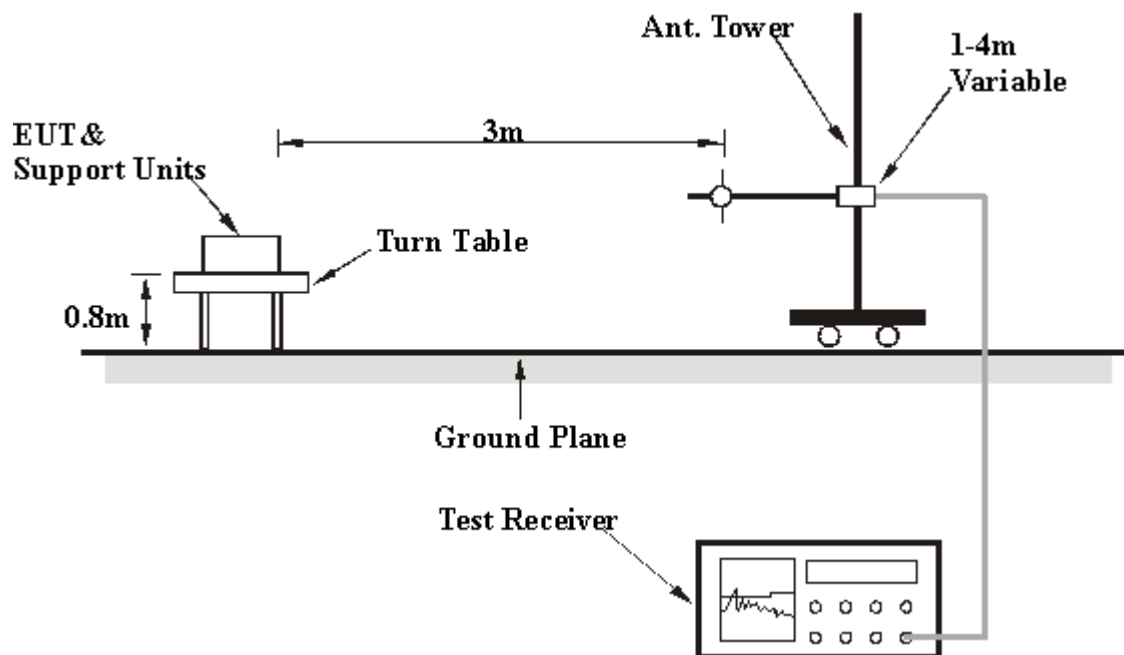

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

1. Placed the EUT on testing table.
2. Prepared other computer systems (support units 1 ~ 3) to act as communication partners and placed them outside of testing area.
3. The communication partner runs test program” MFGTEST” to enable EUT under transmission condition continuously at specific channel frequency via UTP cables.



4.2.7 TEST RESULTS (FOR TRANSMITTER PART)

BELOW 1GHz WORST-CASE DATA : DRAFT 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH 960hPa	TESTED BY	Phoenix Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	69.09	23.89 QP	40.00	-16.11	1.00 H	77	10.80	13.09
2	125.02	28.50 QP	43.50	-15.00	1.00 H	238	14.38	14.12
3	200.00	32.30 QP	43.50	-11.20	1.25 H	261	19.32	12.98
4	250.00	44.62 QP	46.00	-1.38	1.00 H	215	29.20	15.42
5	300.00	34.93 QP	46.00	-11.07	1.00 H	84	17.91	17.02
6	400.00	32.53 QP	46.00	-13.47	1.51 H	207	11.39	21.14
7	500.00	39.32 QP	46.00	-6.68	1.46 H	57	16.66	22.66
8	750.10	33.75 QP	46.00	-12.25	1.15 H	133	5.29	28.46
9	800.00	39.08 QP	46.00	-6.92	1.00 H	291	9.14	29.94
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	79.43	28.45 QP	40.00	-11.55	1.00 V	319	16.51	11.94
2	125.21	29.11 QP	43.50	-14.39	1.00 V	321	14.98	14.13
3	175.00	24.78 QP	43.50	-18.72	1.00 V	84	10.23	14.55
4	200.08	33.19 QP	43.50	-10.31	1.00 V	157	20.21	12.98
5	250.00	41.55 QP	46.00	-4.45	1.55 V	184	26.13	15.42
6	400.00	36.78 QP	46.00	-9.22	1.26 V	20	15.64	21.14
7	500.30	35.31 QP	46.00	-10.69	1.21 V	138	12.64	22.67
8	750.10	35.16 QP	46.00	-10.84	1.33 V	248	6.70	28.46
9	800.00	37.99 QP	46.00	-8.01	1.22 V	4	8.05	29.94
10	1000.00	38.68 QP	54.00	-15.32	1.52 V	9	5.98	32.70

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



4.2.8 TEST RESULTS – Above 1GHz

802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH 960hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.00	58.08 PK	74.00	-15.92	1.41 H	19	27.91	30.17
2	2386.00	45.69 AV	54.00	-8.31	1.41 H	19	15.52	30.17
3	*2412.00	106.49 PK			1.39 H	228	76.23	30.26
4	*2412.00	101.60 AV			1.39 H	228	71.34	30.26
5	4824.00	56.24 PK	74.00	-17.76	1.37 H	172	20.55	35.69
6	4824.00	53.00 AV	54.00	-1.00	1.37 H	172	17.31	35.69
7	#7236.00	52.99 PK	86.49	-33.50	1.14 H	253	11.32	41.67
8	#7236.00	42.65 AV	81.60	-38.95	1.14 H	253	0.98	41.67
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.00	61.01 PK	74.00	-12.99	1.43 V	301	30.84	30.17
2	2386.00	50.70 AV	54.00	-3.30	1.43 V	301	20.53	30.17
3	*2412.00	107.24 PK			1.61 V	290	76.98	30.26
4	*2412.00	102.48 AV			1.61 V	290	72.22	30.26
5	4824.00	55.20 PK	74.00	-18.80	1.20 V	200	19.51	35.69
6	4824.00	51.89 AV	54.00	-2.11	1.20 V	200	16.20	35.69
7	#7236.00	55.91 PK	87.24	-31.33	1.19 V	160	14.24	41.67
8	#7236.00	44.12 AV	82.48	-38.36	1.19 V	160	2.45	41.67

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH 960hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	107.23 PK			1.40 H	228	76.87	30.36
2	*2437.00	101.87 AV			1.40 H	228	71.51	30.36
3	4874.00	56.82 PK	74.00	-17.18	1.40 H	201	21.02	35.80
4	4874.00	53.10 AV	54.00	-0.90	1.40 H	201	17.30	35.80
5	7311.00	52.87 PK	74.00	-21.13	1.22 H	299	11.08	41.79
6	7311.00	43.58 AV	54.00	-10.42	1.22 H	299	1.79	41.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.24 PK			1.70 V	300	77.88	30.36
2	*2437.00	102.93 AV			1.70 V	300	72.57	30.36
3	4874.00	55.62 PK	74.00	-18.38	1.19 V	203	19.82	35.80
4	4874.00	52.09 AV	54.00	-1.91	1.19 V	203	16.29	35.80
5	7311.00	56.21 PK	74.00	-17.79	1.20 V	122	14.42	41.79
6	7311.00	45.23 AV	54.00	-8.77	1.20 V	122	3.44	41.79

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH 960hPa	TESTED BY	Eric Lee



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.24 PK			1.43 H	256	76.79	30.45
2	*2462.00	101.90 AV			1.43 H	256	71.45	30.45
3	2483.50	61.02 PK	74.00	-12.98	1.77 H	37	30.49	30.53
4	2483.50	48.11 AV	54.00	-5.89	1.77 H	37	17.58	30.53
5	4924.00	57.24 PK	74.00	-16.76	1.50 H	300	21.34	35.90
6	4924.00	52.90 AV	54.00	-1.10	1.50 H	300	17.00	35.90
7	7386.00	53.21 PK	74.00	-20.79	1.39 H	95	11.29	41.92
8	7386.00	44.52 AV	54.00	-9.48	1.39 H	95	2.60	41.92
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.10 PK			1.73 V	299	77.55	30.55
2	*2462.00	102.67 AV			1.73 V	299	72.12	30.55
3	2483.50	60.97 PK	74.00	-13.03	1.63 V	238	30.34	30.63
4	2483.50	50.83 AV	54.00	-3.17	1.63 V	238	20.20	30.63
5	4924.00	55.26 PK	74.00	-18.74	1.16 V	192	18.20	37.06
6	4924.00	52.50 AV	54.00	-1.50	1.16 V	192	15.44	37.06
7	7386.00	57.35 PK	74.00	-16.65	1.20 V	154	14.22	43.13
8	7386.00	47.20 AV	54.00	-6.80	1.20 V	154	4.07	43.13

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T



RESTRICTED BANDEDGE (802.11b MODE, CH1, HORIZONTAL)

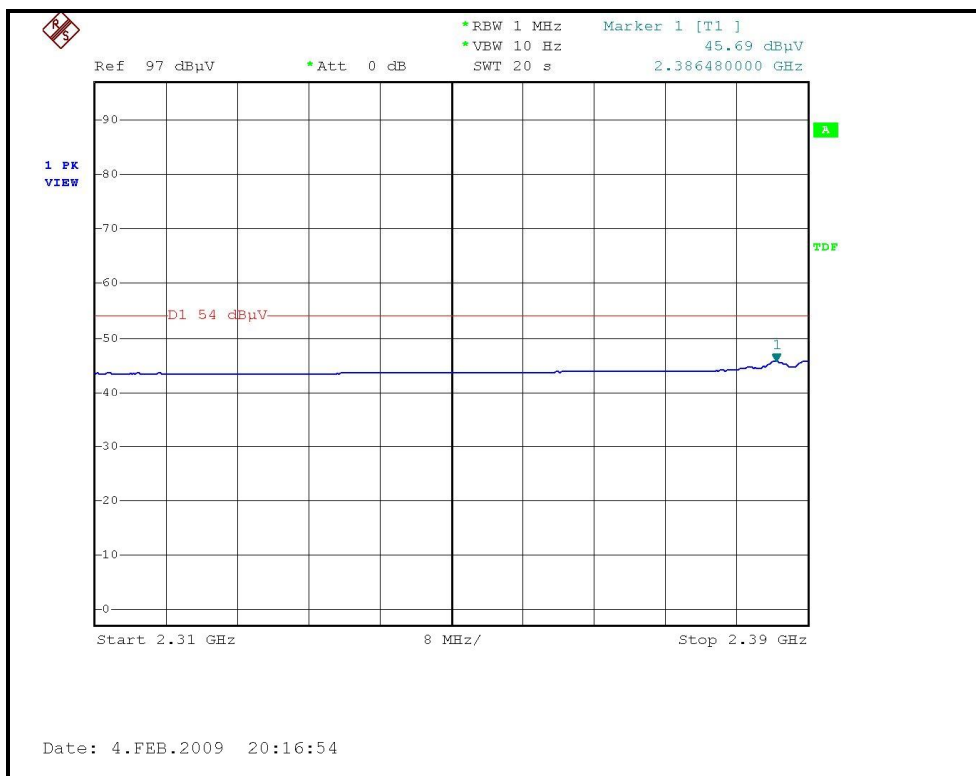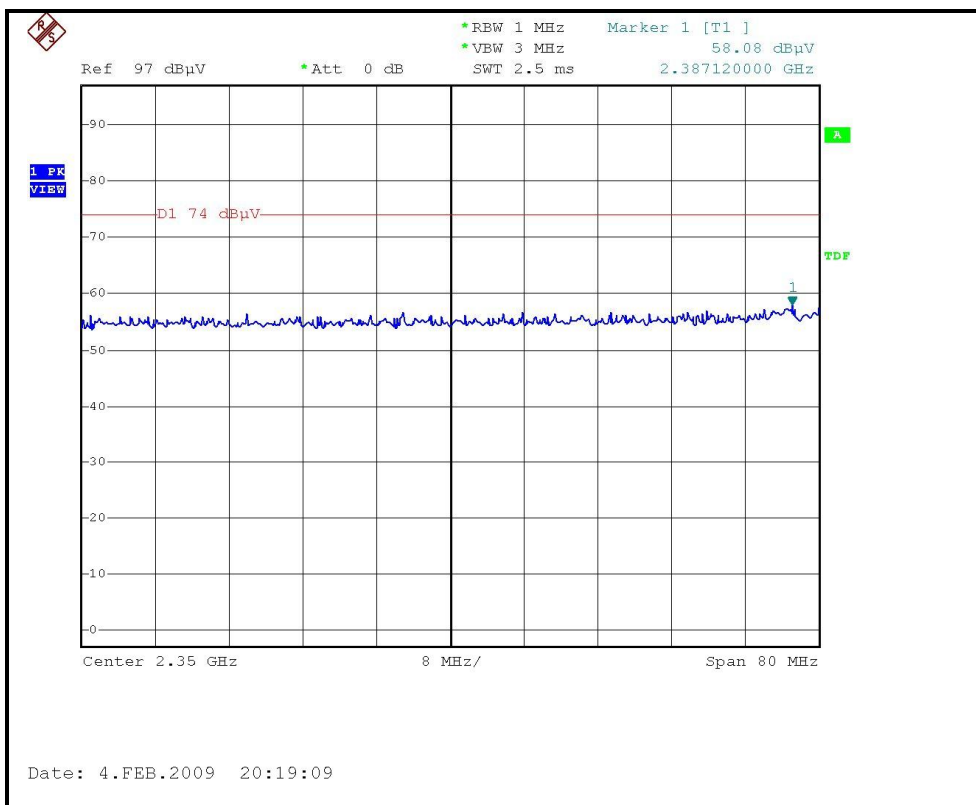



A D T



RESTRICTED BANDEDGE (802.11b MODE,CH1, VERTICAL)

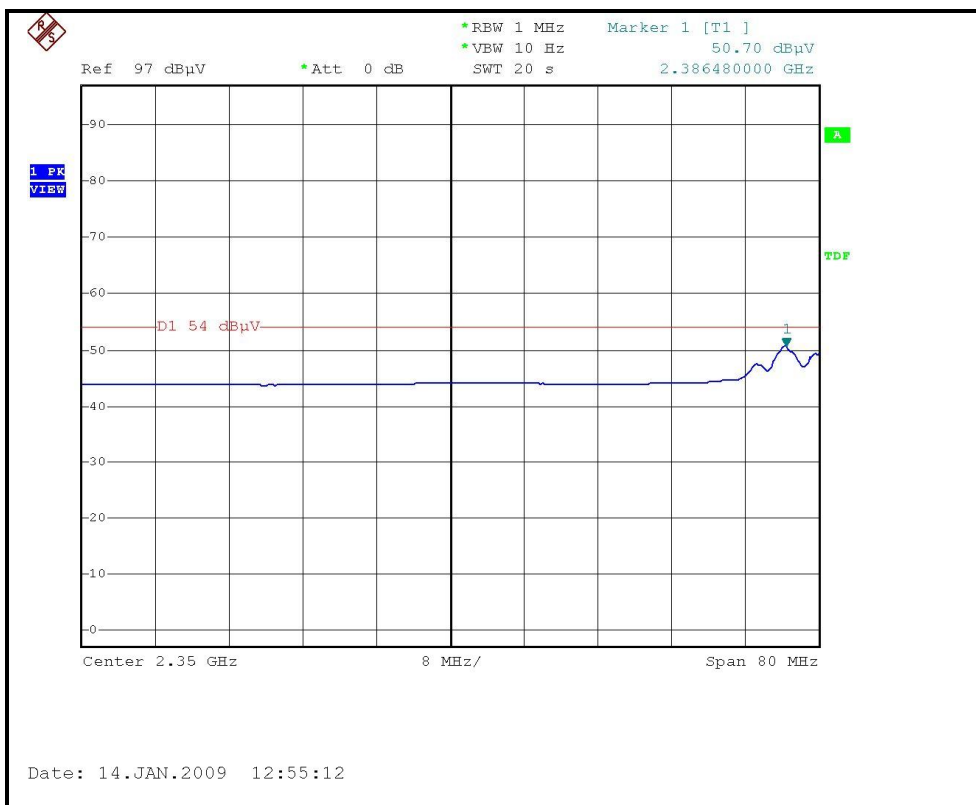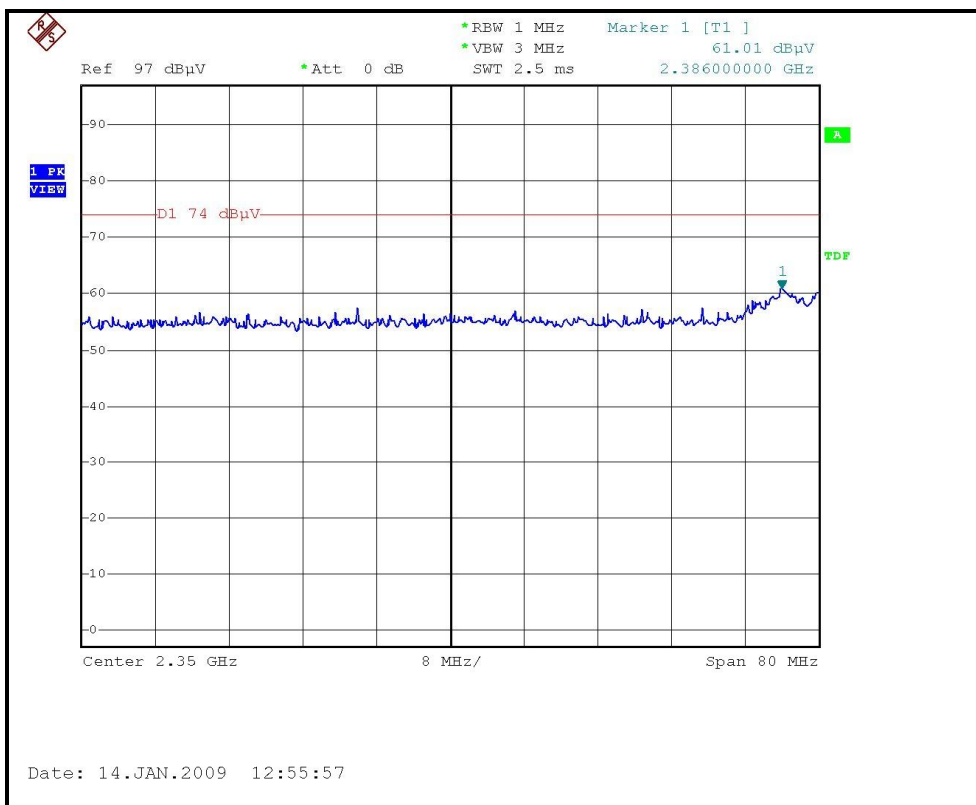



A D T



RESTRICTED BANDEDGE (802.11b MODE, CH11, HORIZONTAL)

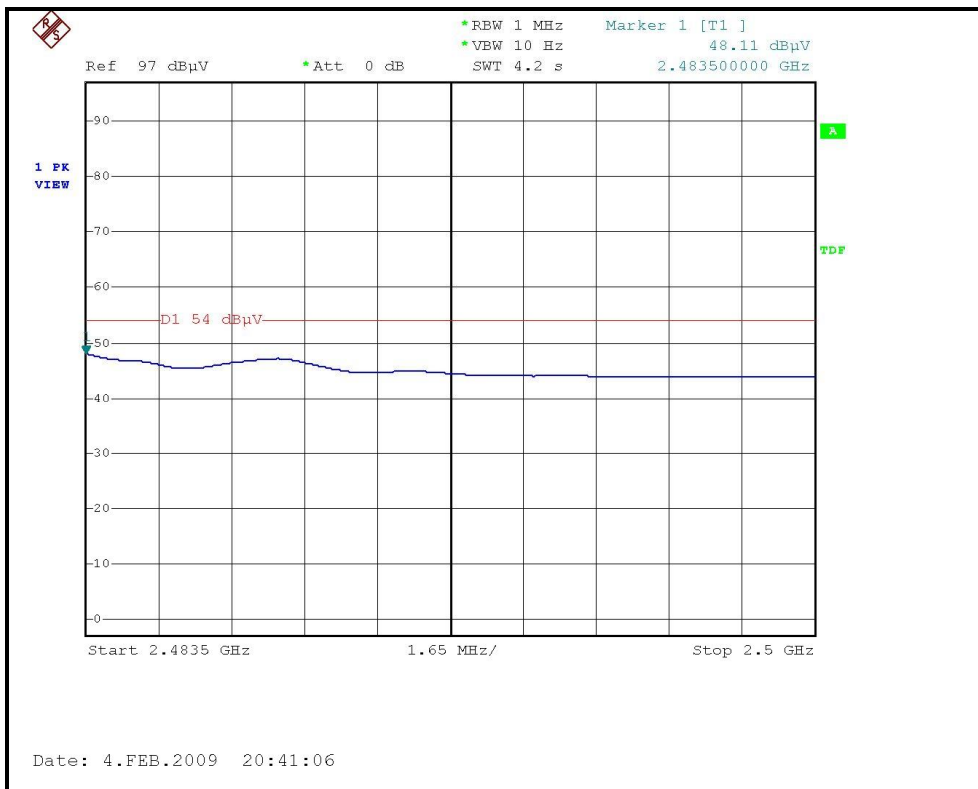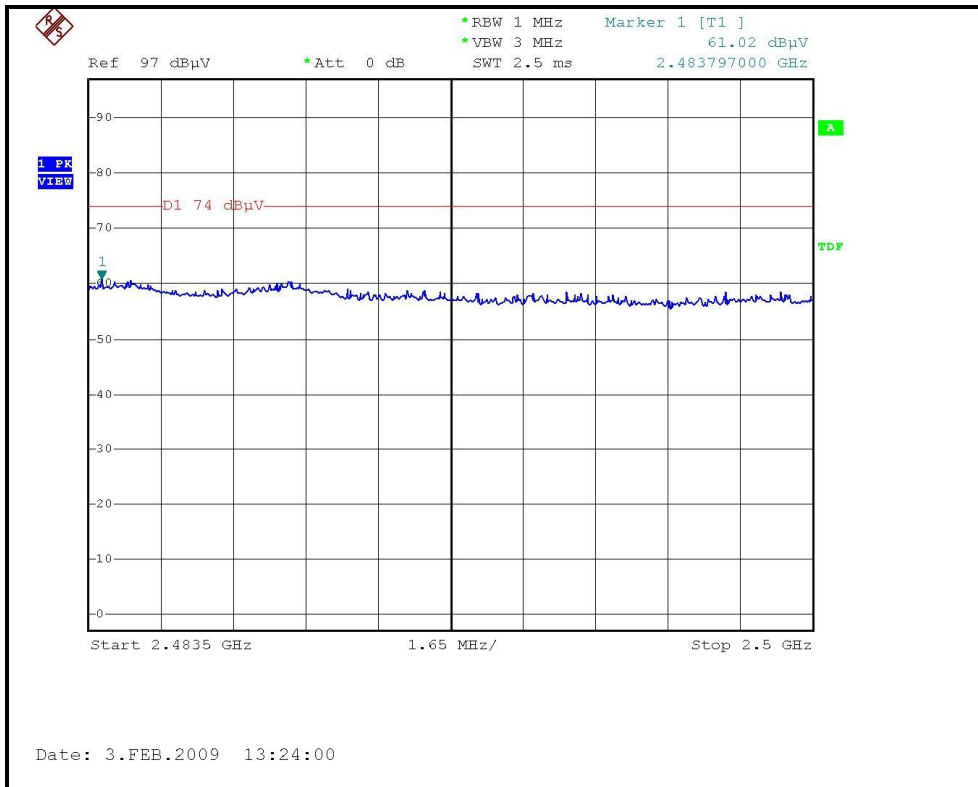



A D T

RESTRICTED BANDEDGE (802.11b MODE,CH11, VERTICAL)

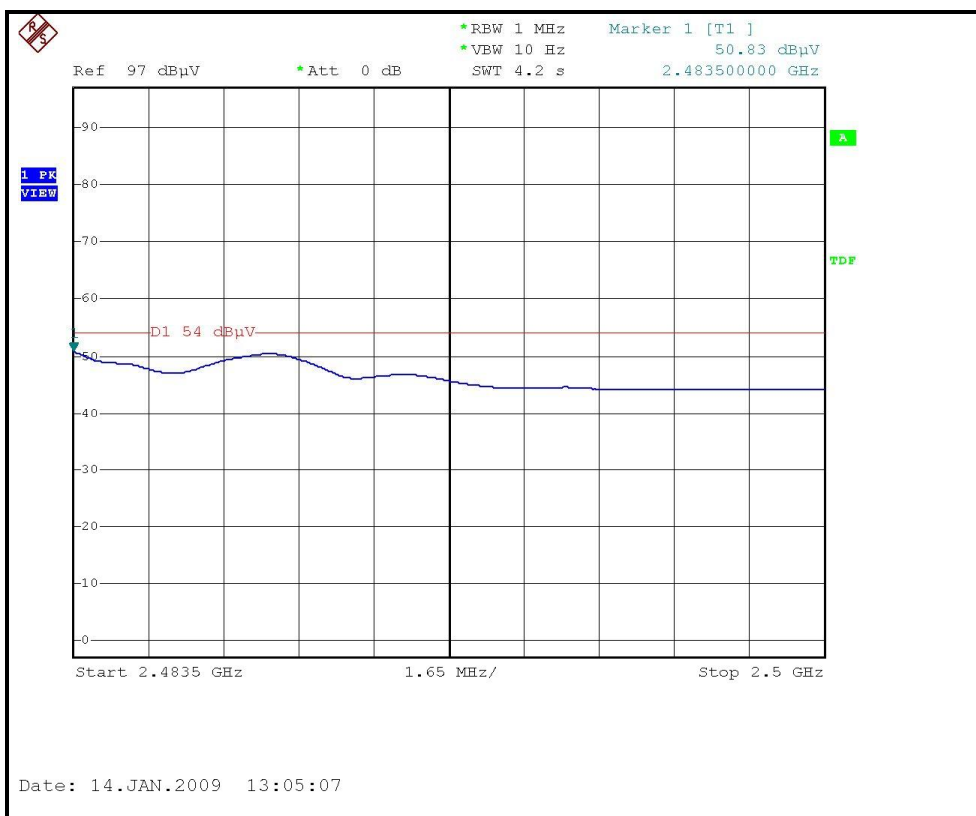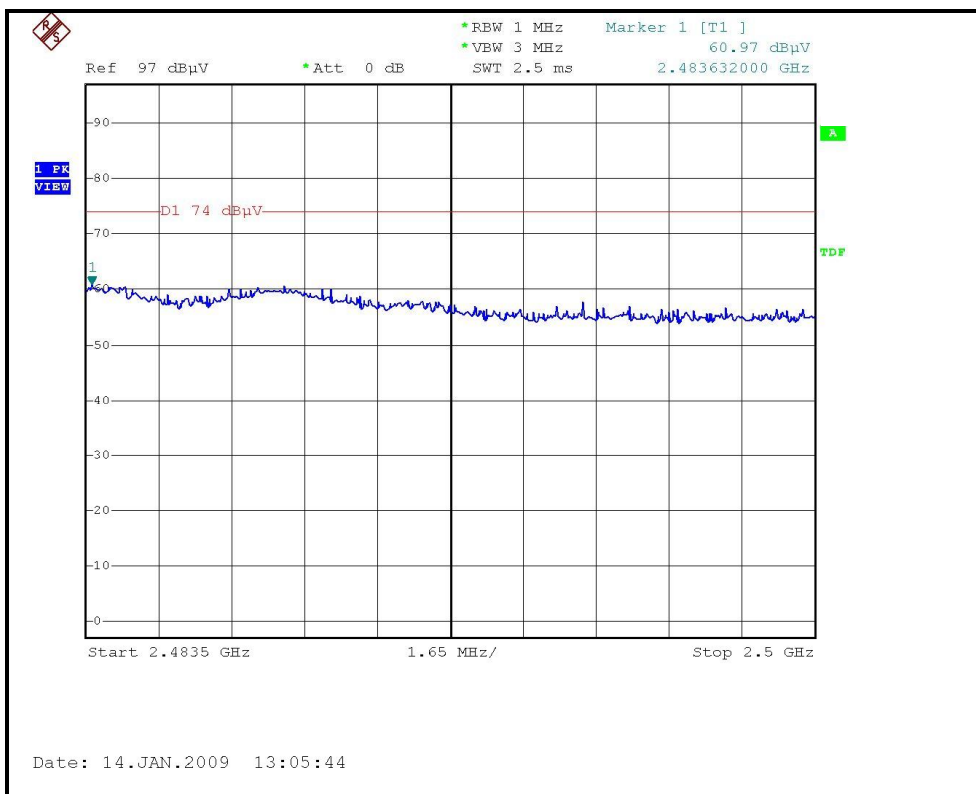



802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH 960hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.27 PK	74.00	-2.73	1.40 H	20	41.09	30.18
2	2390.00	50.69 AV	54.00	-3.31	1.40 H	20	20.51	30.18
3	*2412.00	106.54 PK			1.49 H	23	76.28	30.26
4	*2412.00	95.22 AV			1.49 H	23	64.96	30.26
5	4824.00	57.73 PK	74.00	-16.27	1.53 H	174	22.04	35.69
6	4824.00	40.59 AV	54.00	-13.41	1.53 H	174	4.90	35.69
7	#7236.00	54.28 PK	86.54	-32.26	1.12 H	126	12.61	41.67
8	#7236.00	39.45 AV	75.22	-35.77	1.12 H	126	-2.22	41.67
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.92 PK	74.00	-4.08	1.29 V	223	39.64	30.28
2	2390.00	51.81 AV	54.00	-2.19	1.29 V	223	21.53	30.28
3	*2412.00	108.27 PK			1.11 V	33	77.91	30.36
4	*2412.00	96.84 AV			1.11 V	33	66.48	30.36
5	4824.00	54.70 PK	74.00	-19.30	1.45 V	179	17.91	36.79
6	4824.00	37.38 AV	54.00	-16.62	1.45 V	179	0.59	36.79
7	#7236.00	54.10 PK	88.27	-34.17	1.31 V	299	10.96	43.14
8	#7236.00	39.12 AV	76.84	-37.72	1.31 V	299	-4.02	43.14

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * ": Fundamental frequency.
 6. "#": The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH 960hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	106.42 PK			1.11 H	296	76.06	30.36
2	*2437.00	95.24 AV			1.11 H	296	64.88	30.36
3	4874.00	57.21 PK	74.00	-16.79	1.36 H	62	21.41	35.80
4	4874.00	41.32 AV	54.00	-12.68	1.36 H	62	5.52	35.80
5	7311.00	55.94 PK	74.00	-18.06	1.19 H	127	14.15	41.79
6	7311.00	39.28 AV	54.00	-14.72	1.19 H	127	-2.51	41.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.97 PK			1.23 V	326	78.51	30.46
2	*2437.00	96.90 AV			1.23 V	326	66.44	30.46
3	4874.00	55.00 PK	74.00	-19.00	1.45 V	179	18.08	36.92
4	4874.00	36.91 AV	54.00	-17.09	1.45 V	179	-0.01	36.92
5	7311.00	54.29 PK	74.00	-19.71	1.53 V	62	11.15	43.14
6	7311.00	40.23 AV	54.00	-13.77	1.53 V	62	-2.91	43.14

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH 960hPa	TESTED BY	Eric Lee



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.73 PK			1.06 H	277	75.28	30.45
2	*2462.00	94.66 AV			1.06 H	277	64.21	30.45
3	2483.50	70.34 PK	74.00	-3.66	1.28 H	263	39.81	30.53
4	2483.50	49.41 AV	54.00	-4.59	1.28 H	263	18.88	30.53
5	4924.00	58.21 PK	74.00	-15.79	1.62 H	200	22.31	35.90
6	4924.00	41.21 AV	54.00	-12.79	1.62 H	200	5.31	35.90
7	7386.00	54.10 PK	74.00	-19.90	1.19 H	136	12.18	41.92
8	7386.00	39.65 AV	54.00	-14.35	1.19 H	136	-2.27	41.92
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.45 PK			1.39 V	17	76.90	30.55
2	*2462.00	96.02 AV			1.39 V	17	65.47	30.55
3	2483.50	73.04 PK	74.00	-0.96	1.28 V	263	42.41	30.63
4	2483.50	51.59 AV	54.00	-2.41	1.28 V	263	20.96	30.63
5	4924.00	55.24 PK	74.00	-18.76	1.24 V	54	18.18	37.06
6	4924.00	38.62 AV	54.00	-15.38	1.24 V	54	1.56	37.06
7	7386.00	54.25 PK	74.00	-19.75	1.04 V	78	11.12	43.13
8	7386.00	39.25 AV	54.00	-14.75	1.04 V	78	-3.88	43.13

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T



RESTRICTED BANDEDGE (802.11g MODE, CH1, HORIZONTAL)

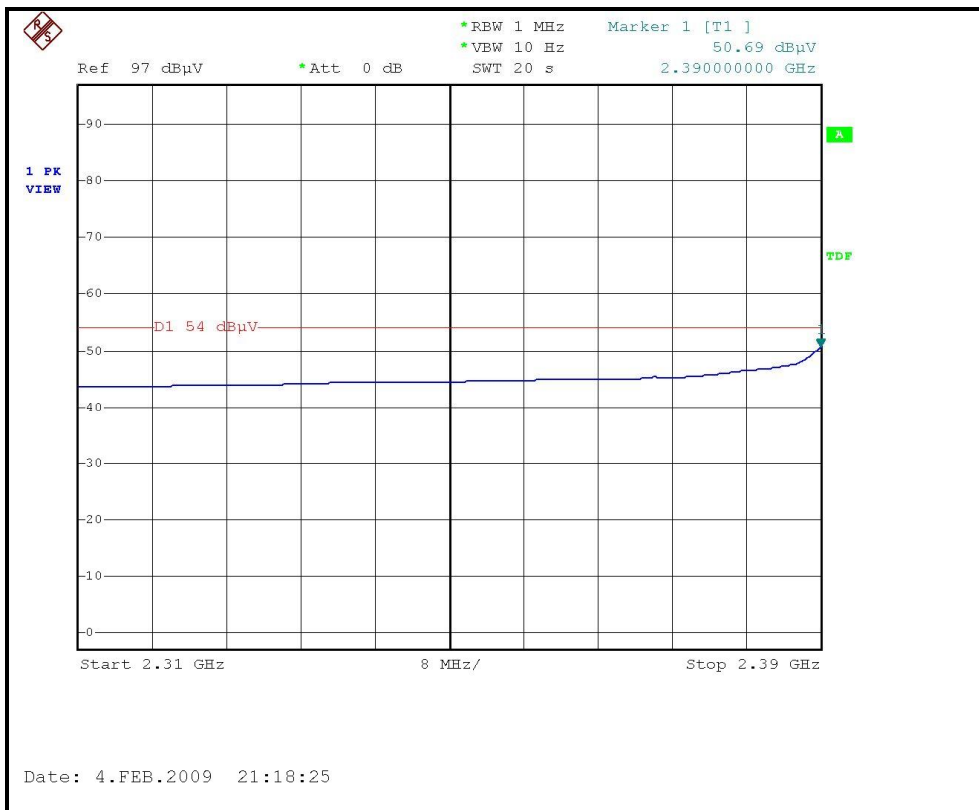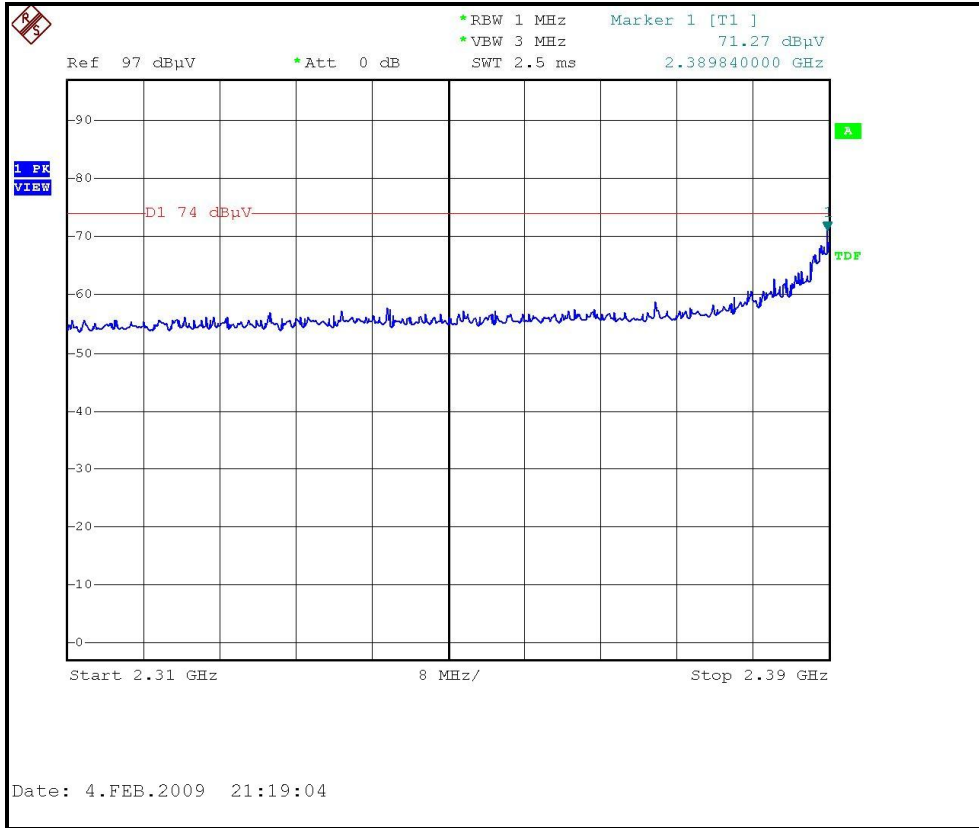



A D T



RESTRICTED BANDEDGE (802.11g MODE,CH1, VERTICAL)

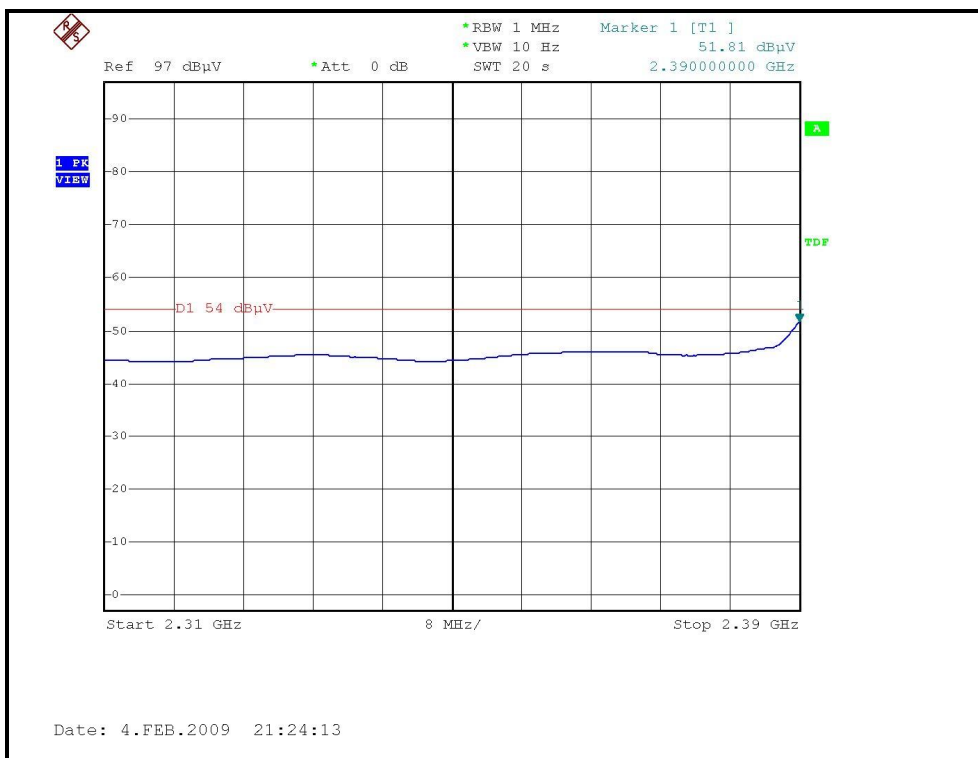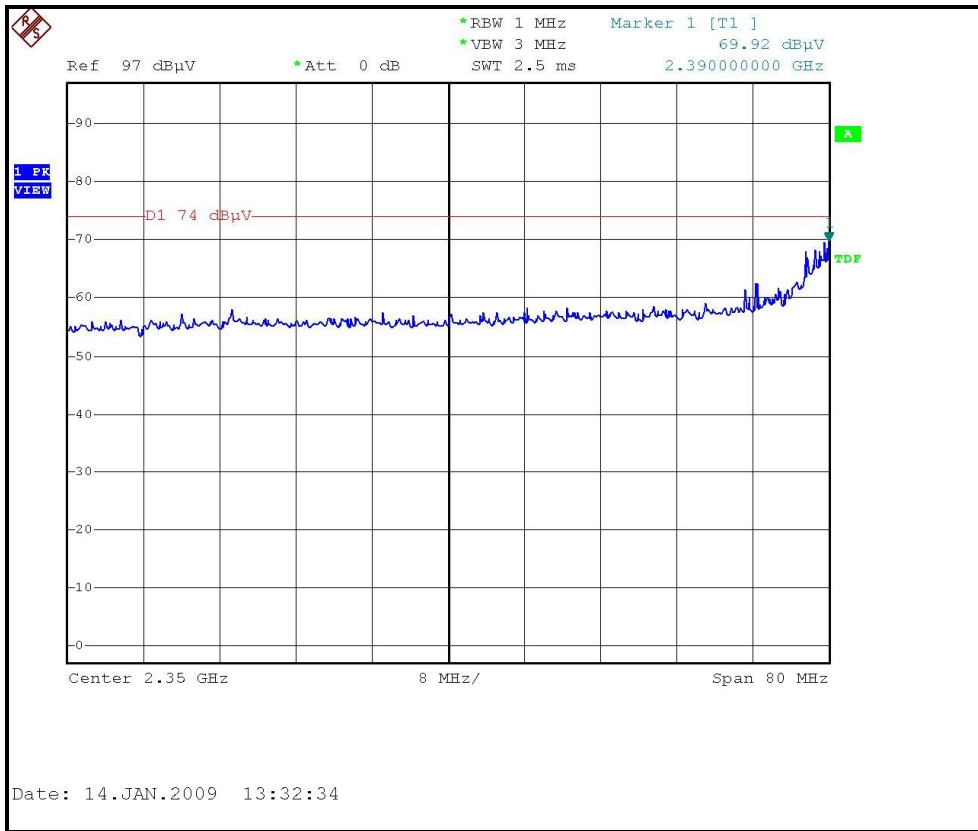



A D T



RESTRICTED BANDEDGE (802.11g MODE, CH11, HORIZONTAL)

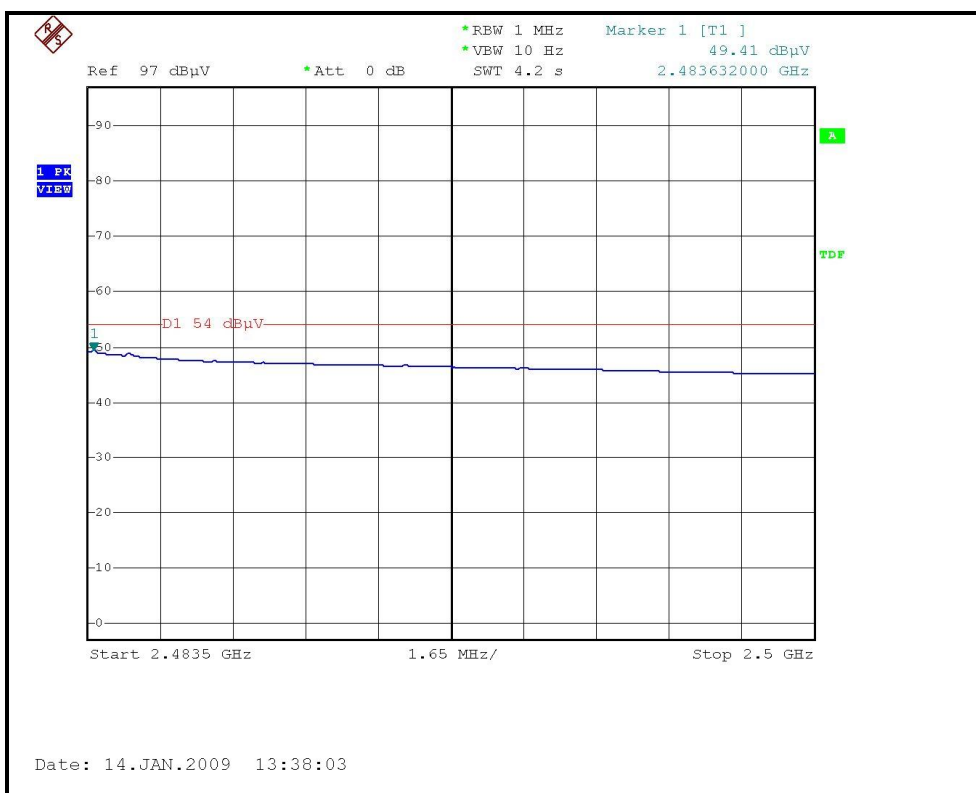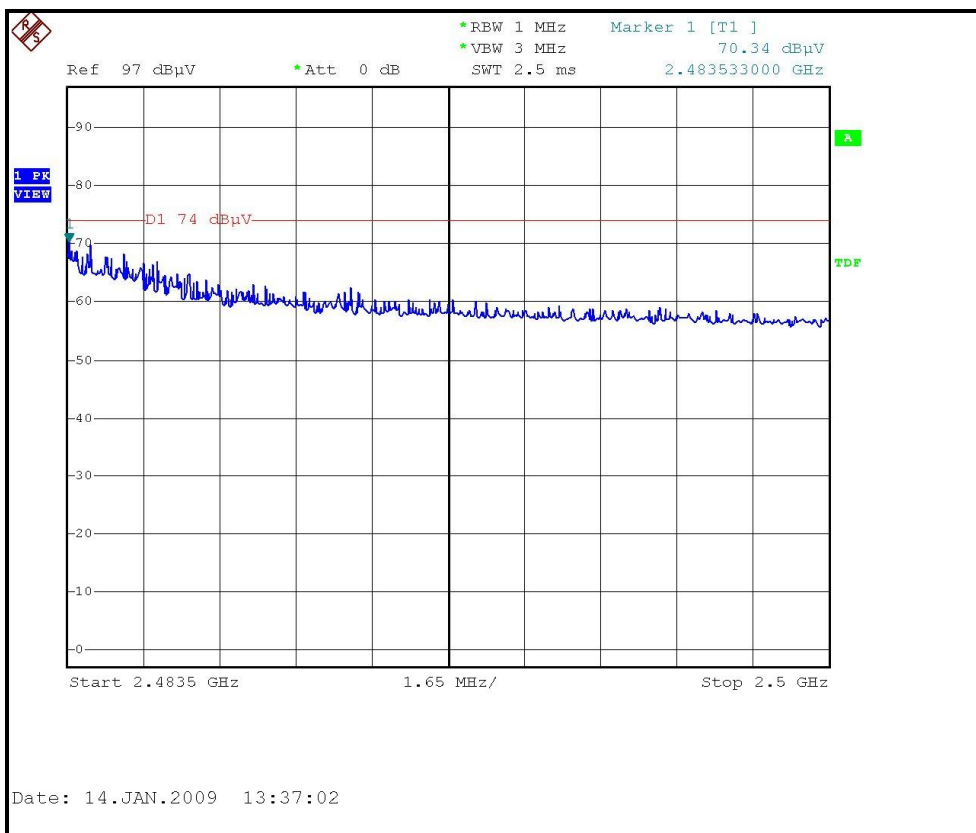



A D T

RESTRICTED BANDEDGE (802.11g MODE,CH11, VERTICAL)

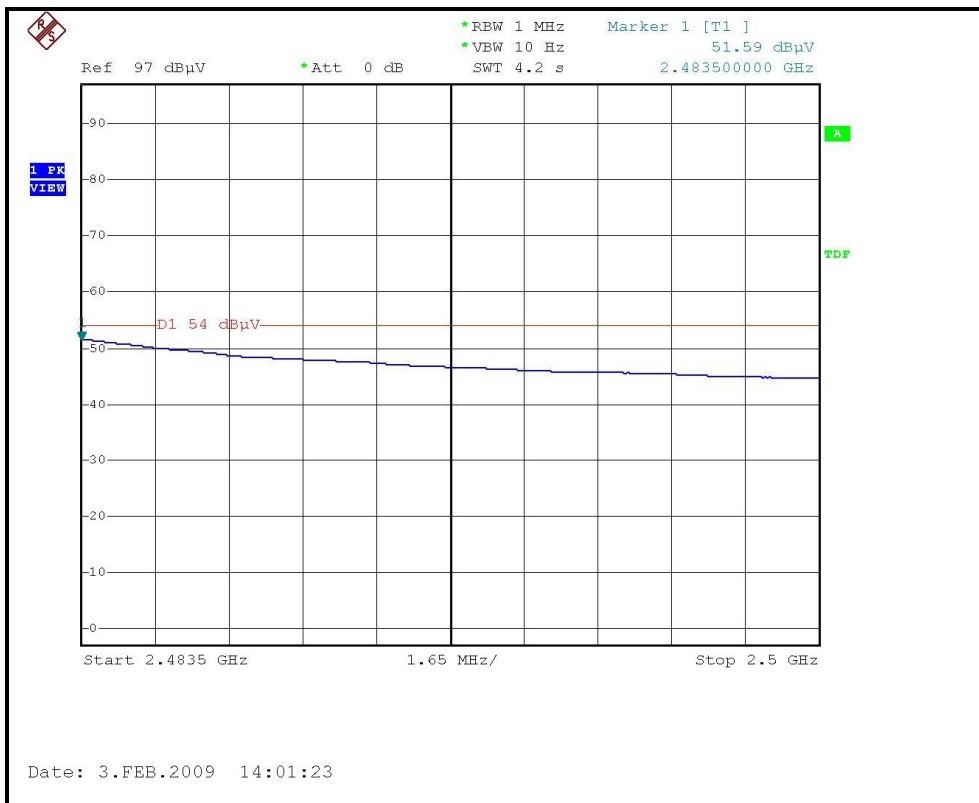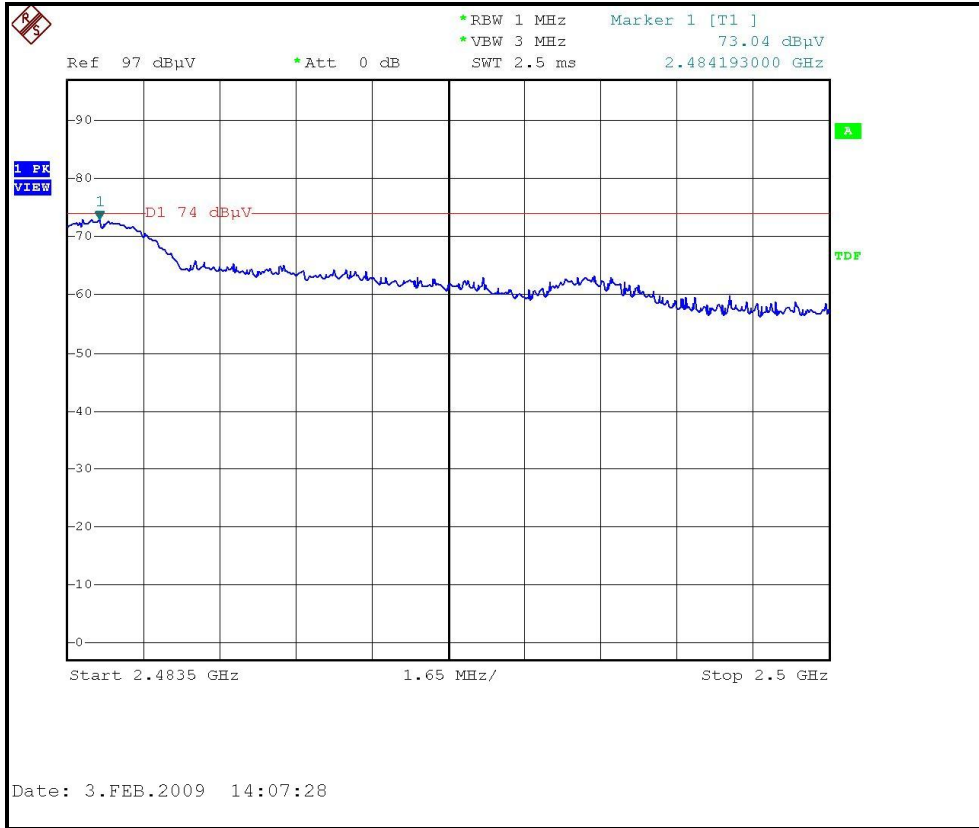



DRAFT 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH 960hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.96 PK	74.00	-4.04	1.16 H	26	39.78	30.18
2	2390.00	48.02 AV	54.00	-5.98	1.16 H	26	17.84	30.18
3	*2412.00	110.24 PK			1.21 H	324	79.98	30.26
4	*2412.00	97.72 AV			1.21 H	324	67.46	30.26
5	4824.00	48.23 PK	74.00	-25.77	1.44 H	200	12.54	35.69
6	4824.00	34.97 AV	54.00	-19.03	1.44 H	200	-0.72	35.69
7	#7236.00	52.65 PK	90.24	-37.59	1.03 H	22	10.98	41.67
8	#7236.00	38.62 AV	77.72	-39.10	1.03 H	22	-3.05	41.67
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.93 PK	74.00	-4.07	1.00 V	205	39.75	30.18
2	2390.00	51.57 AV	54.00	-2.43	1.00 V	205	21.39	30.18
3	*2412.00	112.70 PK			1.00 V	206	82.44	30.26
4	*2412.00	99.40 AV			1.00 V	206	69.14	30.26
5	4824.00	58.19 PK	74.00	-15.81	1.63 V	2	22.50	35.69
6	4824.00	33.90 AV	54.00	-20.10	1.63 V	2	-1.79	35.69
7	#7236.00	53.28 PK	92.70	-39.42	1.43 V	321	11.61	41.67
8	#7236.00	39.64 AV	79.40	-39.76	1.43 V	321	-2.03	41.67

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * ": Fundamental frequency.
 6. "#": The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH 960hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	109.43 PK			1.42 H	3	79.07	30.36
2	*2437.00	98.69 AV			1.42 H	3	68.33	30.36
3	4874.00	48.22 PK	74.00	-25.78	1.51 H	200	12.42	35.80
4	4874.00	35.02 AV	54.00	-18.98	1.51 H	200	-0.78	35.80
5	7311.00	53.11 PK	74.00	-20.89	1.50 H	162	11.32	41.79
6	7311.00	39.62 AV	54.00	-14.38	1.50 H	162	-2.17	41.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	111.51 PK			1.24 V	327	81.15	30.36
2	*2437.00	100.24 AV			1.24 V	327	69.88	30.36
3	4874.00	48.69 PK	74.00	-25.31	1.00 V	81	12.89	35.80
4	4874.00	34.77 AV	54.00	-19.23	1.00 V	81	-1.03	35.80
5	7311.00	54.12 PK	74.00	-19.88	1.52 V	165	12.33	41.79
6	7311.00	39.80 AV	54.00	-14.20	1.52 V	165	-1.99	41.79

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH 960hPa	TESTED BY	Eric Lee



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.04 PK			1.22 H	337	79.59	30.45
2	*2462.00	96.82 AV			1.22 H	337	66.37	30.45
3	2483.50	72.36 PK	74.00	-1.64	1.40 H	19	41.83	30.53
4	2483.50	50.42 AV	54.00	-3.58	1.40 H	19	19.89	30.53
5	4924.00	47.79 PK	74.00	-26.21	1.45 H	186	11.89	35.90
6	4924.00	34.22 AV	54.00	-19.78	1.45 H	186	-1.68	35.90
7	7386.00	53.64 PK	74.00	-20.36	1.32 H	172	11.72	41.92
8	7386.00	39.01 AV	54.00	-14.99	1.32 H	172	-2.91	41.92
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	112.50 PK			1.00 V	206	82.05	30.45
2	*2462.00	98.40 AV			1.00 V	206	67.95	30.45
3	2483.50	72.27 PK	74.00	-1.73	1.12 V	208	41.74	30.53
4	2483.50	52.23 AV	54.00	-1.77	1.12 V	208	21.70	30.53
5	4924.00	48.11 PK	74.00	-25.89	1.58 V	10	12.21	35.90
6	4924.00	34.62 AV	54.00	-19.38	1.58 V	10	-1.28	35.90
7	7386.00	53.78 PK	74.00	-20.22	1.42 V	178	11.86	41.92
8	7386.00	39.72 AV	54.00	-14.28	1.42 V	178	-2.20	41.92

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T



RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE, CH1, HORIZONTAL)

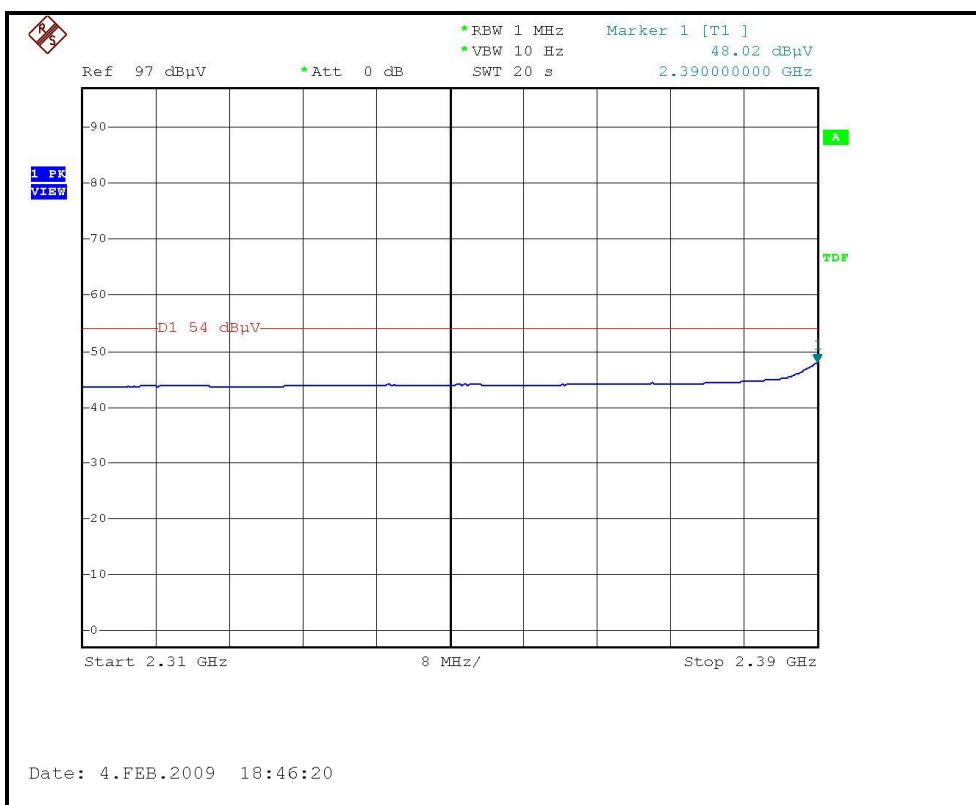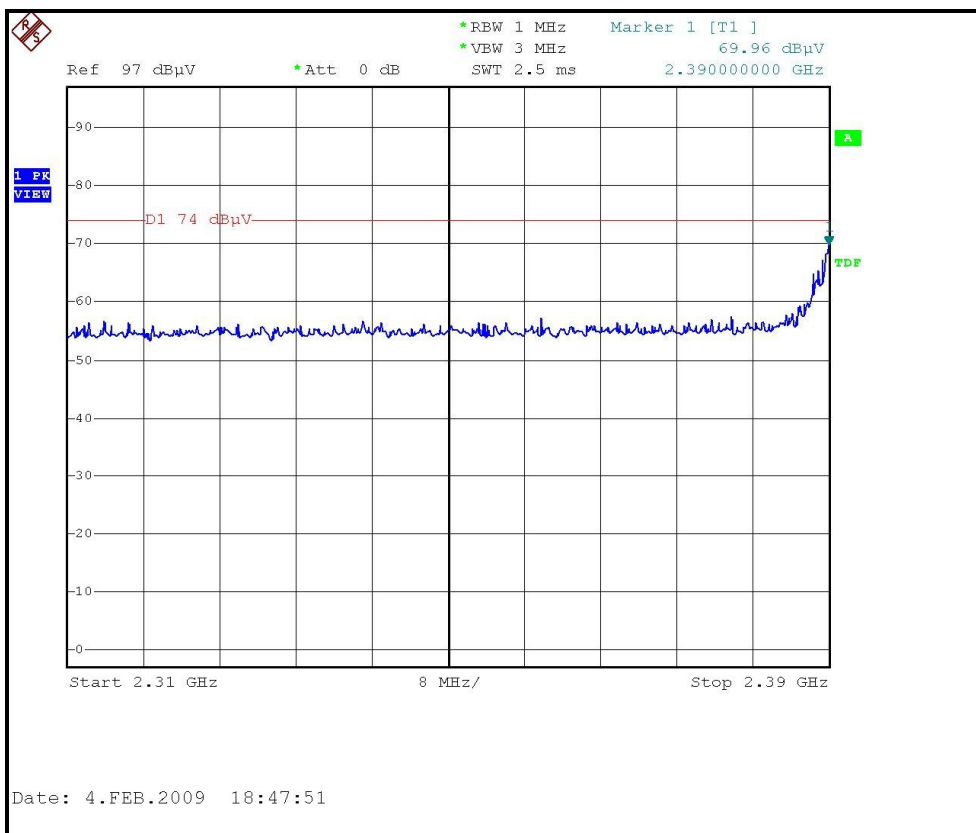



A D T



RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE,CH1, VERTICAL)

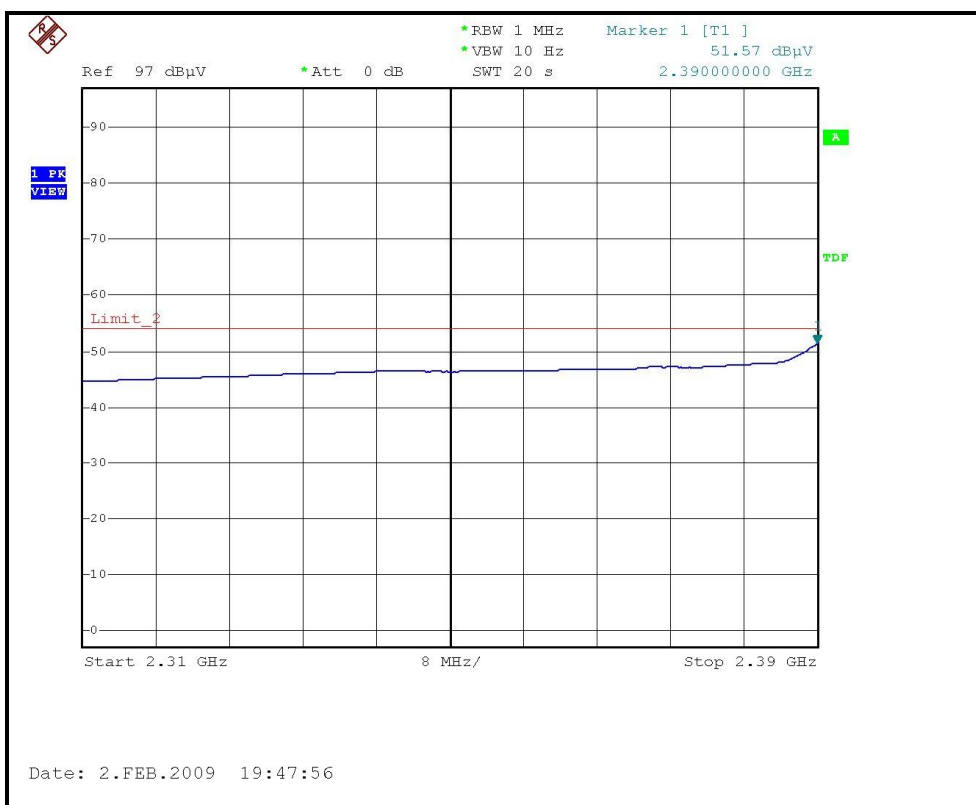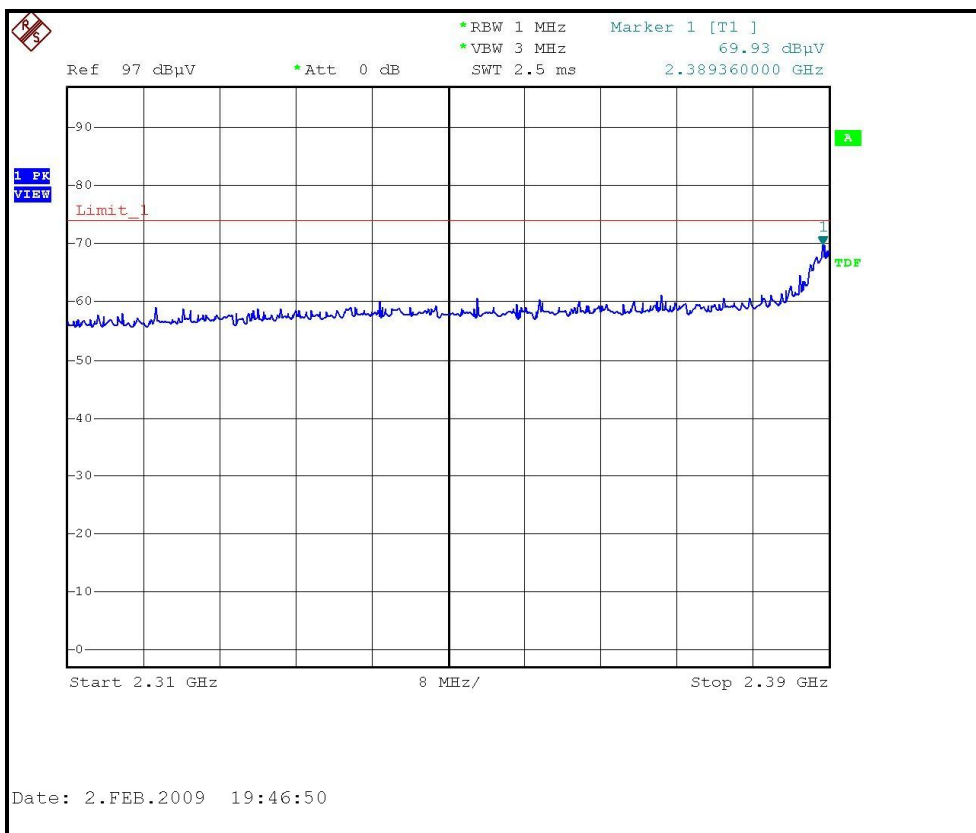



A D T



RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE, CH11, HORIZONTAL)

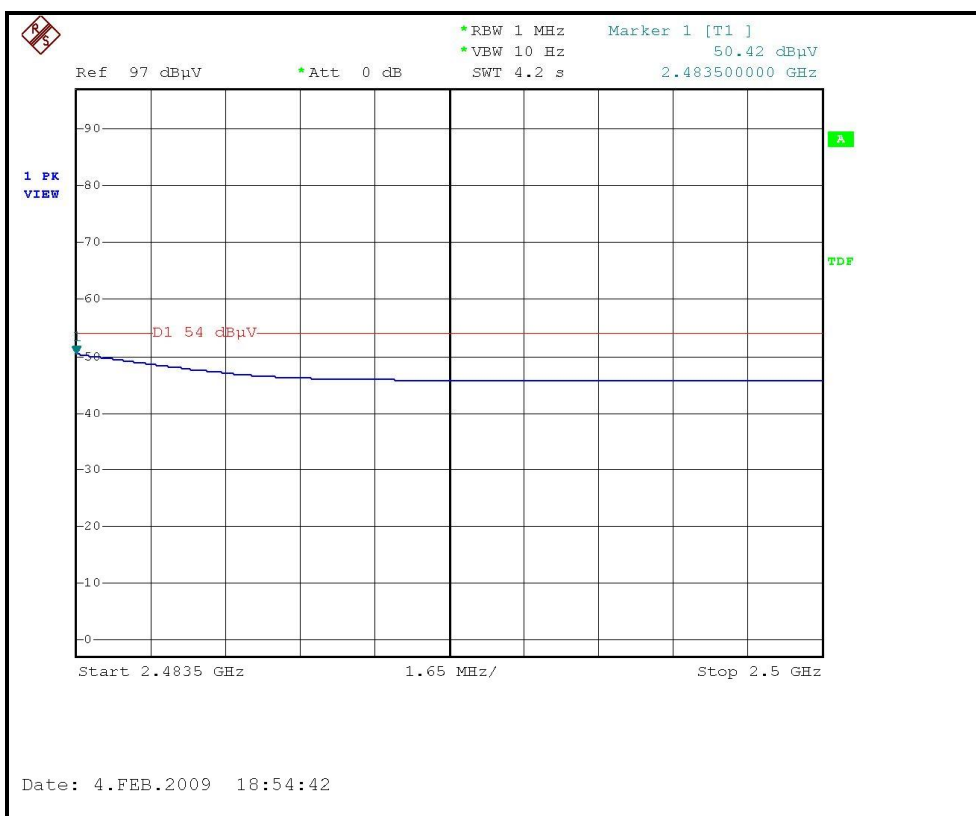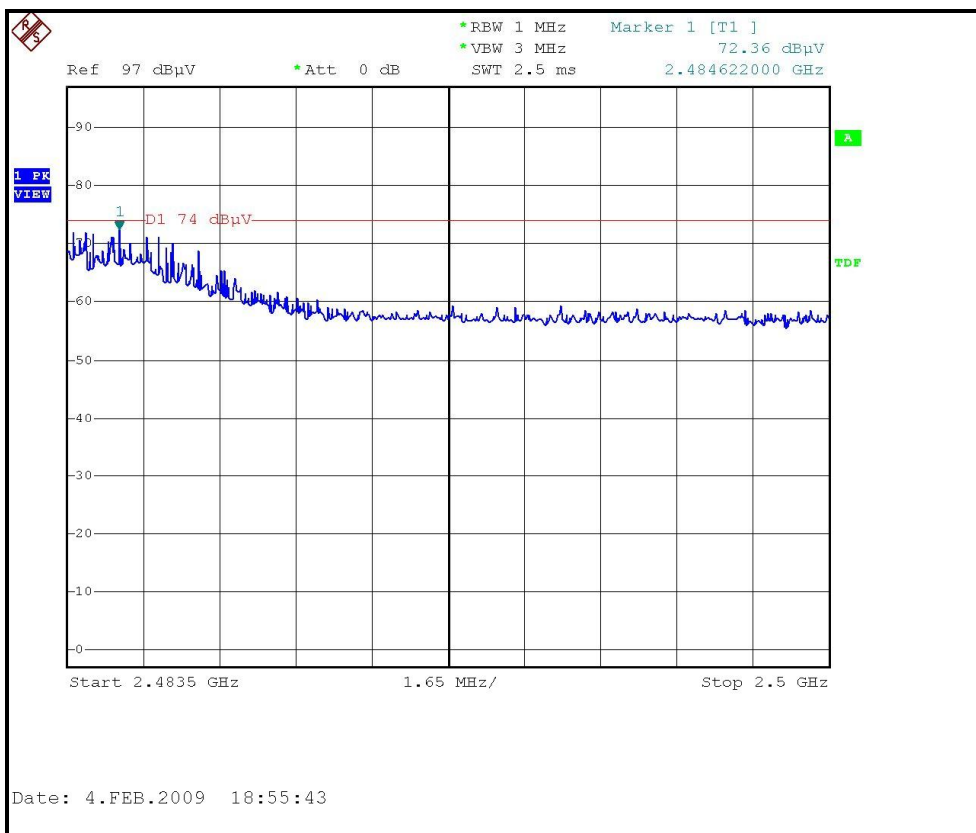



A D T

RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE,CH11, VERTICAL)

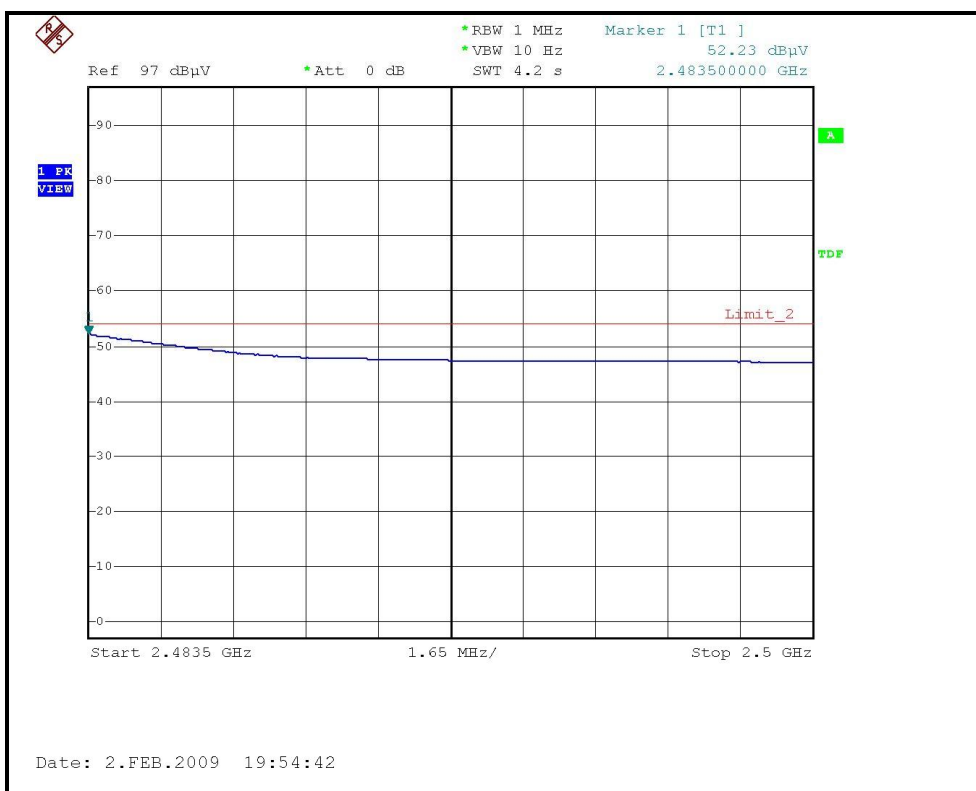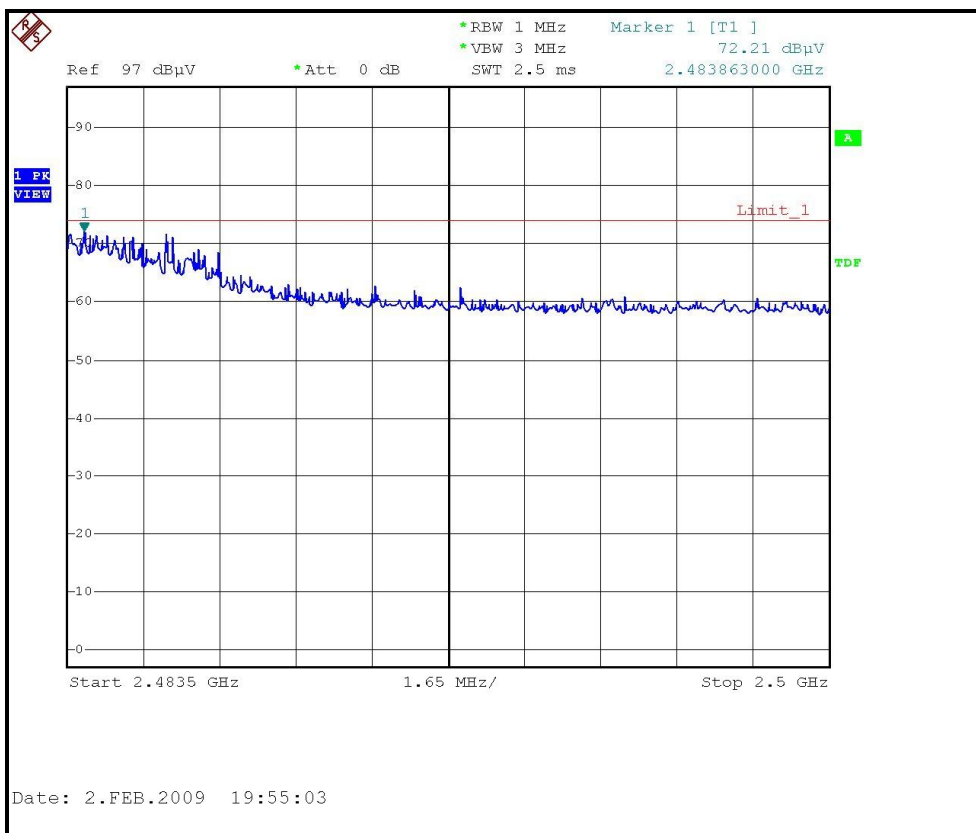

**DRAFT 802.11n (40MHz) OFDM MODULATION**

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH 960hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.82 PK	74.00	-6.18	1.54 H	59	37.64	30.18
2	2390.00	51.15 AV	54.00	-2.85	1.54 H	59	20.97	30.18
3	*2422.00	105.03 PK			1.54 H	359	74.73	30.30
4	*2422.00	92.10 AV			1.54 H	359	61.80	30.30
5	4844.00	48.62 PK	74.00	-25.38	1.88 H	200	12.88	35.74
6	4844.00	33.97 AV	54.00	-20.03	1.88 H	200	-1.77	35.74
7	7266.00	51.60 PK	74.00	-22.40	1.73 H	65	9.88	41.72
8	7266.00	38.72 AV	54.00	-15.28	1.73 H	65	-3.00	41.72
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.62 PK	74.00	-3.38	1.00 V	205	40.44	30.18
2	2390.00	52.72 AV	54.00	-1.28	1.00 V	205	22.54	30.18
3	*2422.00	107.50 PK			1.00 V	205	77.20	30.30
4	*2422.00	93.70 AV			1.00 V	205	63.40	30.30
5	4844.00	49.78 PK	74.00	-24.22	1.78 V	304	14.04	35.74
6	4844.00	34.65 AV	54.00	-19.35	1.78 V	304	-1.09	35.74
7	7266.00	54.65 PK	74.00	-19.35	2.01 V	49	12.93	41.72
8	7266.00	39.94 AV	54.00	-14.06	2.01 V	49	-1.78	41.72

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH 960hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	105.89 PK			1.59 H	3	75.53	30.36
2	*2437.00	92.40 AV			1.59 H	3	62.04	30.36
3	4874.00	48.28 PK	74.00	-25.72	1.83 H	204	12.48	35.80
4	4874.00	34.03 AV	54.00	-19.97	1.83 H	204	-1.77	35.80
5	7311.00	52.00 PK	74.00	-22.00	1.67 H	78	10.21	41.79
6	7311.00	38.65 AV	54.00	-15.35	1.67 H	78	-3.14	41.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	107.53 PK			1.01 V	302	77.17	30.36
2	*2437.00	94.89 AV			1.01 V	302	64.53	30.36
3	4874.00	49.28 PK	74.00	-24.72	1.49 V	54	13.48	35.80
4	4874.00	35.04 AV	54.00	-18.96	1.49 V	54	-0.76	35.80
5	7311.00	52.84 PK	74.00	-21.16	1.84 V	73	11.05	41.79
6	7311.00	39.73 AV	54.00	-14.27	1.84 V	73	-2.06	41.79

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH 960hPa	TESTED BY	Eric Lee



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	105.71 PK			1.63 H	4	75.30	30.41
2	*2452.00	92.89 AV			1.63 H	4	62.48	30.41
3	2483.50	67.82 PK	74.00	-6.18	1.75 H	22	37.29	30.53
4	2483.50	48.87 AV	54.00	-5.13	1.75 H	22	18.34	30.53
5	4904.00	48.78 PK	74.00	-25.22	2.03 H	62	12.92	35.86
6	4904.00	33.65 AV	54.00	-20.35	2.03 H	62	-2.21	35.86
7	7356.00	53.07 PK	74.00	-20.93	1.69 H	171	11.20	41.87
8	7356.00	39.00 AV	54.00	-15.00	1.69 H	171	-2.87	41.87
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	106.90 PK			1.00 V	206	76.49	30.41
2	*2452.00	94.10 AV			1.00 V	206	63.69	30.41
3	2483.50	72.40 PK	74.00	-1.60	1.13 V	210	41.87	30.53
4	2483.50	52.54 AV	54.00	-1.46	1.13 V	210	22.01	30.53
5	4904.00	48.04 PK	74.00	-25.96	1.48 V	184	12.18	35.86
6	4904.00	35.14 AV	54.00	-18.86	1.48 V	184	-0.72	35.86
7	7356.00	53.73 PK	74.00	-20.27	1.53 V	318	11.86	41.87
8	7356.00	39.78 AV	54.00	-14.22	1.53 V	318	-2.09	41.87

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T



RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE, CH1, HORIZONTAL)

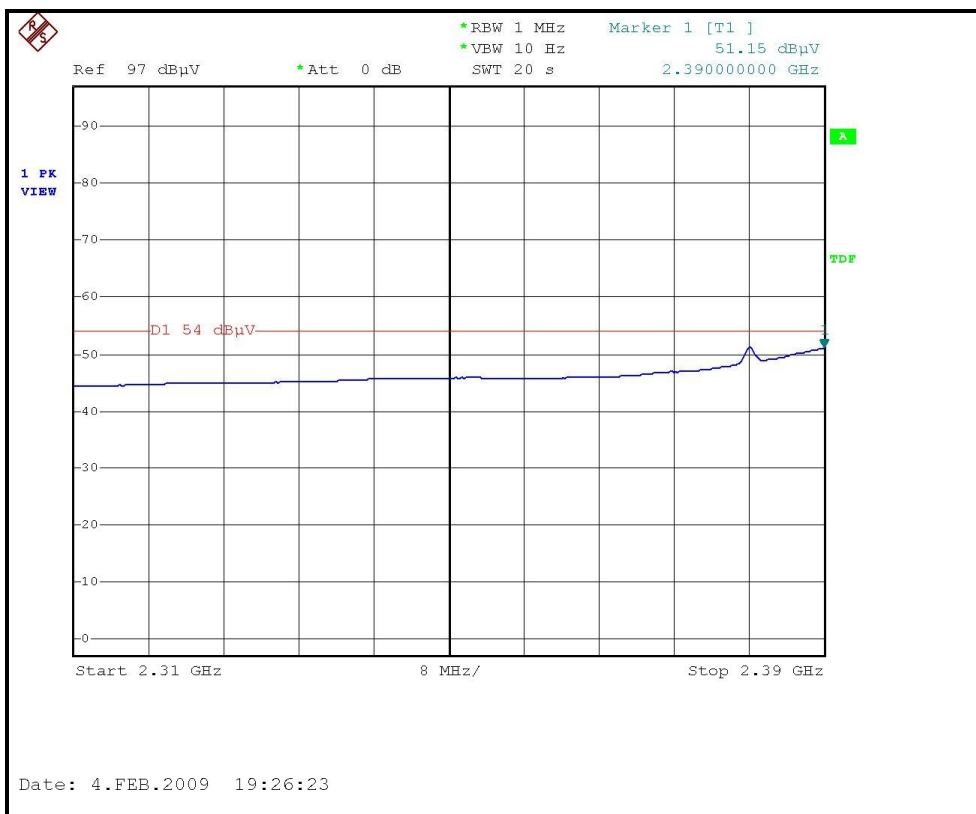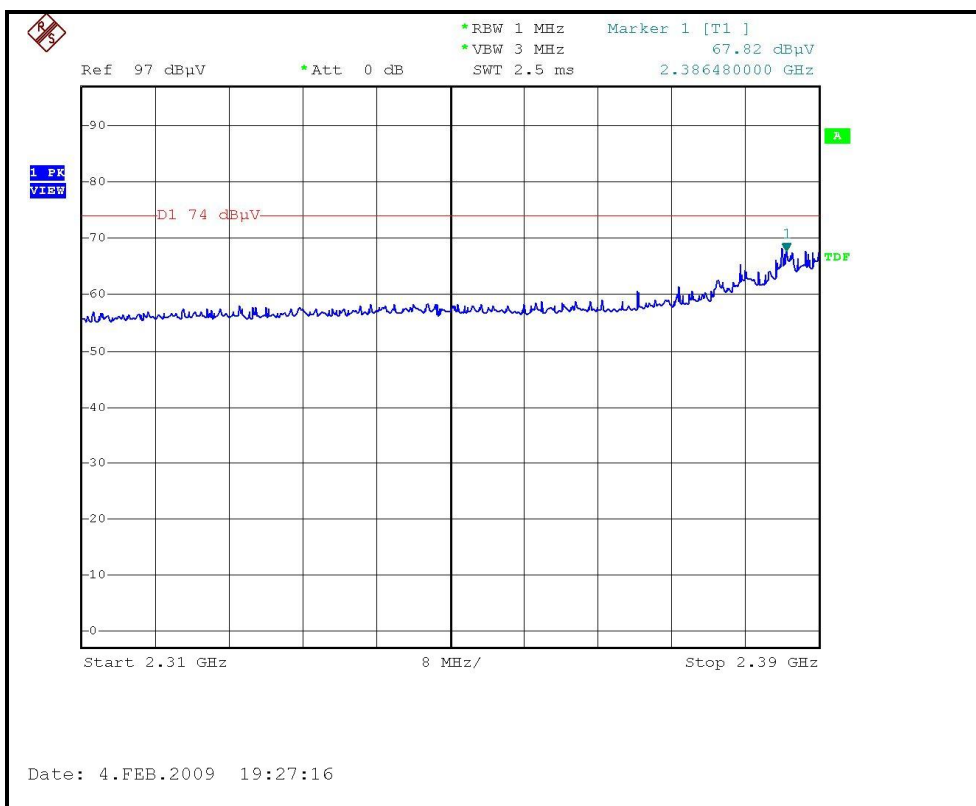



A D T



RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE,CH1, VERTICAL)

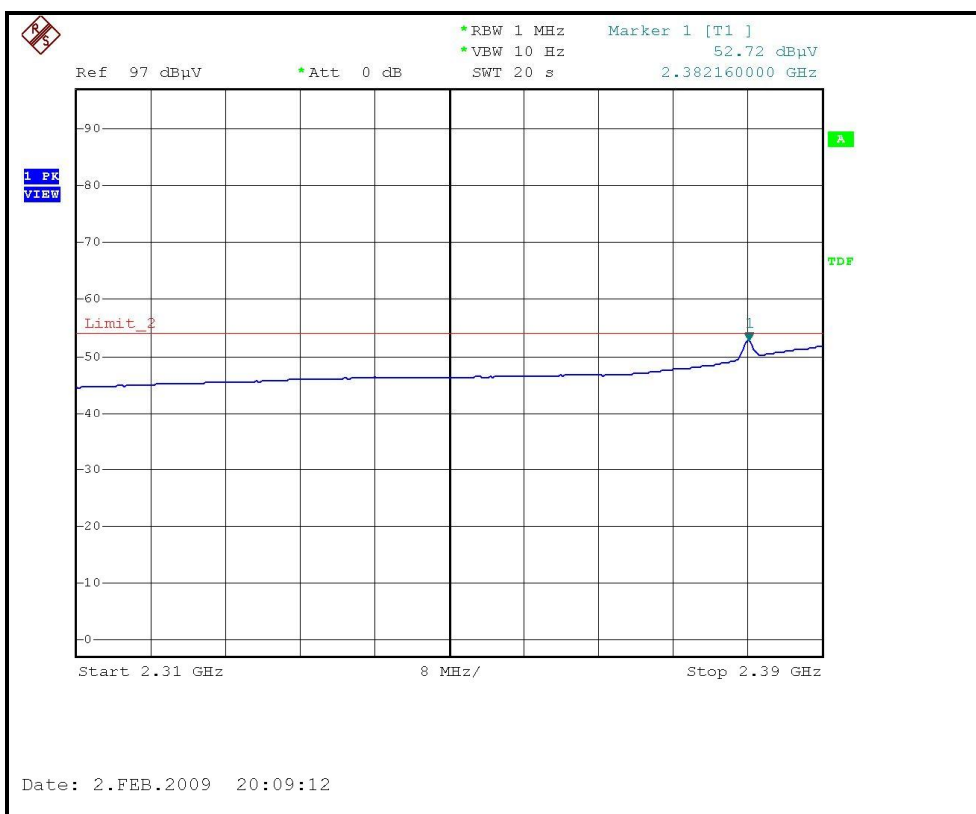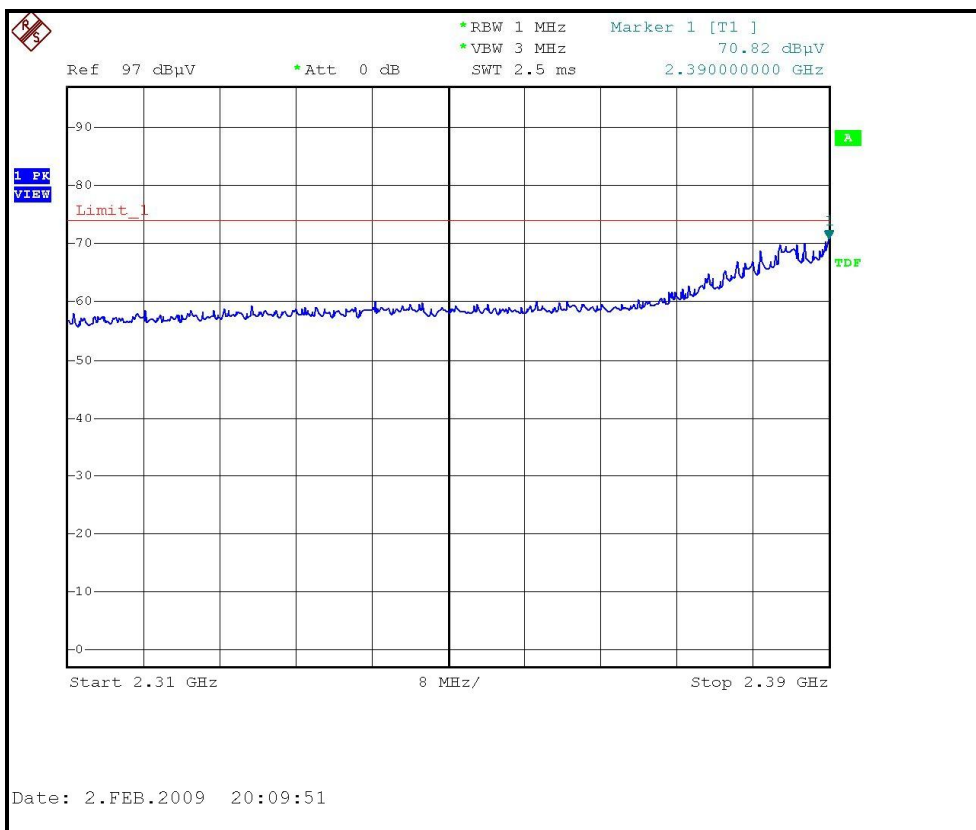



A D T



RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE, CH7, HORIZONTAL)

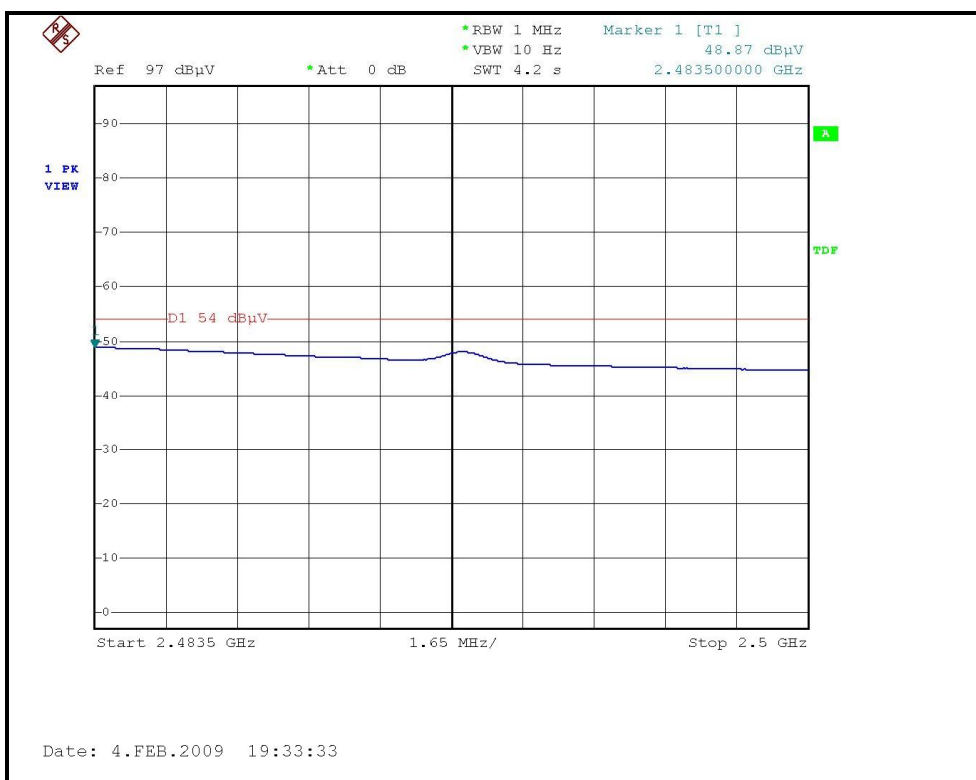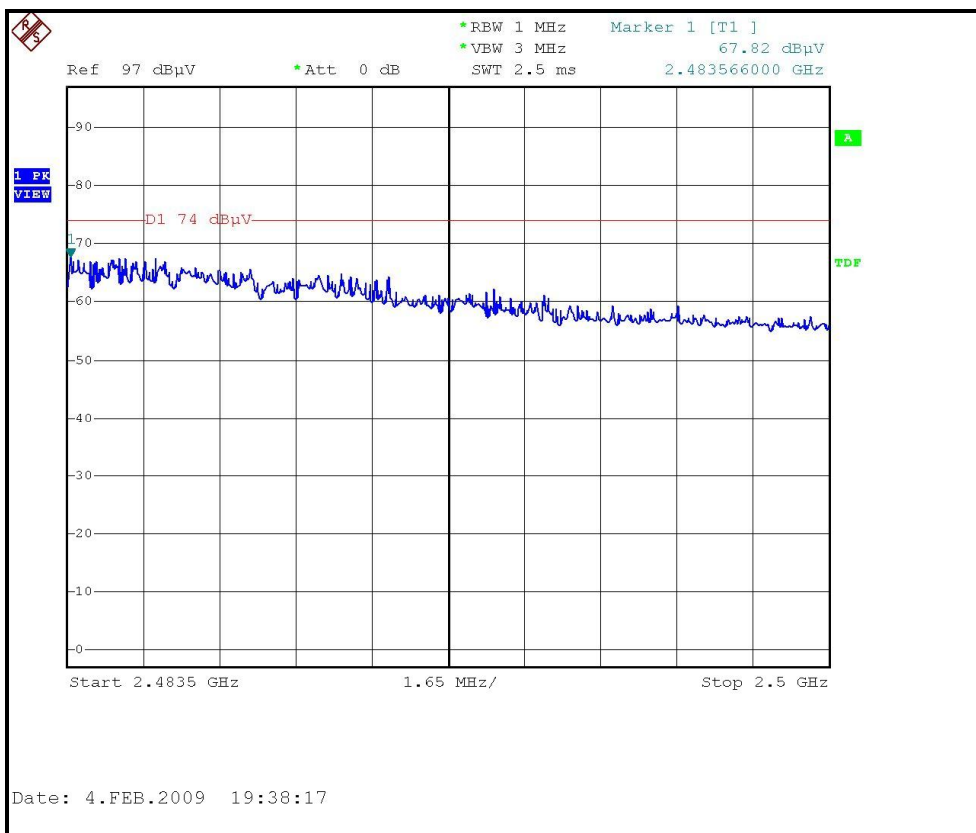



A D T

RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE,CH7, VERTICAL)

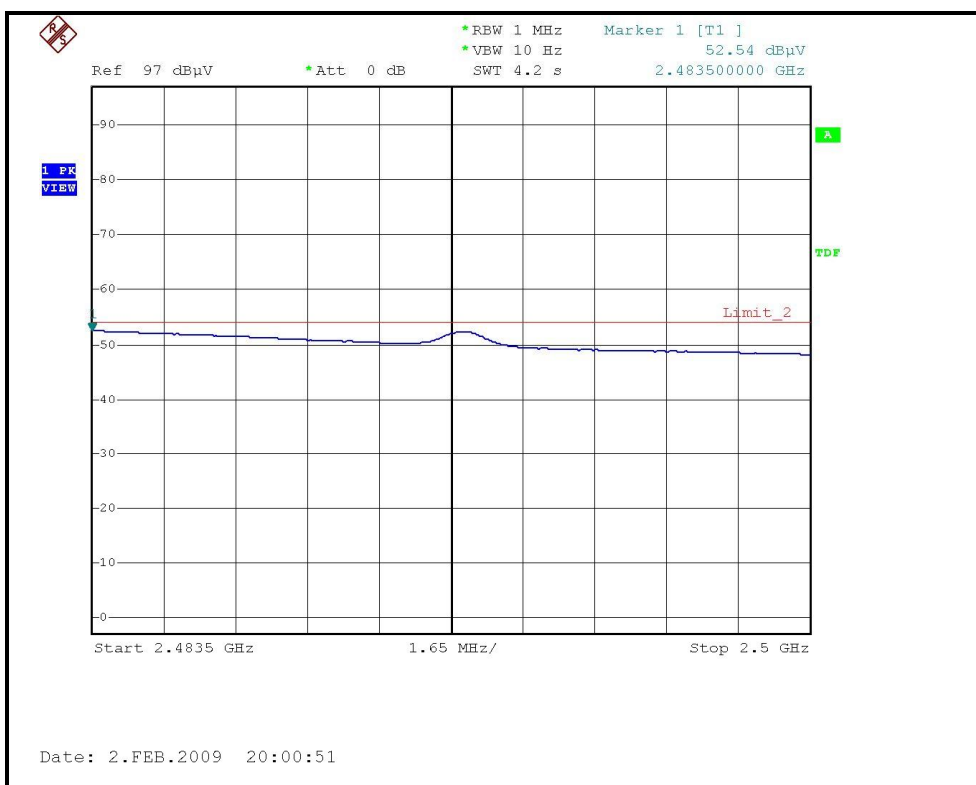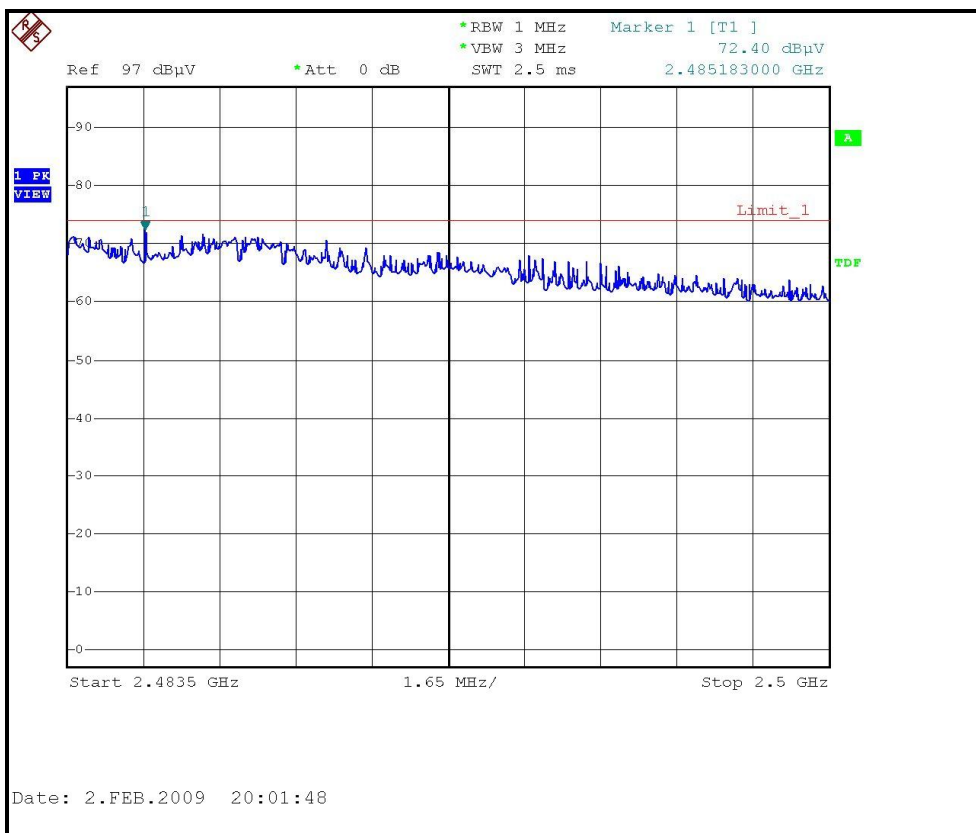



4.2.9 TEST RESULTS (FOR RECEIVER PART)

BELOW 1GHz WORST-CASE DATA : DRAFT 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH 960hPa	TESTED BY	Phoenix Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	69.09	23.89 QP	40.00	-16.11	1.00 H	77	10.80	13.09
2	125.02	28.50 QP	43.50	-15.00	1.00 H	238	14.38	14.12
3	200.00	32.30 QP	43.50	-11.20	1.25 H	261	19.32	12.98
4	250.00	44.62 QP	46.00	-1.38	1.00 H	215	29.20	15.42
5	300.00	34.93 QP	46.00	-11.07	1.00 H	84	17.91	17.02
6	400.00	32.53 QP	46.00	-13.47	1.51 H	207	11.39	21.14
7	500.00	39.32 QP	46.00	-6.68	1.46 H	57	16.66	22.66
8	750.10	33.75 QP	46.00	-12.25	1.15 H	133	5.29	28.46
9	800.00	39.08 QP	46.00	-6.92	1.00 H	291	9.14	29.94
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	79.43	28.45 QP	40.00	-11.55	1.00 V	319	16.51	11.94
2	125.21	29.11 QP	43.50	-14.39	1.00 V	321	14.98	14.13
3	175.00	24.78 QP	43.50	-18.72	1.00 V	84	10.23	14.55
4	200.08	33.19 QP	43.50	-10.31	1.00 V	157	20.21	12.98
5	250.00	41.55 QP	46.00	-4.45	1.55 V	184	26.13	15.42
6	400.00	36.78 QP	46.00	-9.22	1.26 V	20	15.64	21.14
7	500.30	35.31 QP	46.00	-10.69	1.21 V	138	12.64	22.67
8	750.10	35.16 QP	46.00	-10.84	1.33 V	248	6.70	28.46
9	800.00	37.99 QP	46.00	-8.01	1.22 V	4	8.05	29.94
10	1000.00	38.68 QP	54.00	-15.32	1.52 V	9	5.98	32.70

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



4.2.10 TEST RESULTS – Above 1GHz

DRAFT 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH 960hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	3216.00	43.30 PK	74.00	-30.70	1.11 H	82	11.17	32.13
2	3216.00	29.70 AV	54.00	-24.30	1.11 H	82	-2.43	32.13
3	6432.00	51.40 PK	74.00	-22.60	1.27 H	102	12.01	39.39
4	6432.00	37.10 AV	54.00	-16.90	1.27 H	102	-2.29	39.39
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	3216.00	44.20 PK	74.00	-29.80	1.00 V	353	12.07	32.13
2	3216.00	29.30 AV	54.00	-24.70	1.00 V	353	-2.83	32.13
3	6432.00	51.70 PK	74.00	-22.30	1.18 V	344	12.31	39.39
4	6432.00	37.10 AV	54.00	-16.90	1.18 V	344	-2.29	39.39

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH 960hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	3249.30	43.00 PK	74.00	-31.00	1.13 H	314	10.84	32.16
2	3249.30	29.10 AV	54.00	-24.90	1.13 H	314	-3.06	32.16
3	6498.60	52.10 PK	74.00	-21.90	1.10 H	341	12.43	39.67
4	6498.60	37.80 AV	54.00	-16.20	1.10 H	341	-1.87	39.67

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	3249.30	43.60 PK	74.00	-30.40	1.00 V	341	11.44	32.16
2	3249.30	29.40 AV	54.00	-24.60	1.00 V	341	-2.76	32.16
3	6498.60	52.20 PK	74.00	-21.80	1.14 V	350	12.53	39.67
4	6498.60	37.70 AV	54.00	-16.30	1.14 V	350	-1.97	39.67

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH 960hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	3282.60	42.90 PK	74.00	-31.10	1.07 H	40	10.71	32.19
2	3282.60	29.20 AV	54.00	-24.80	1.07 H	40	-2.99	32.19
3	6565.30	51.60 PK	74.00	-22.40	1.06 H	325	11.71	39.89
4	6565.30	37.80 AV	54.00	-16.20	1.06 H	325	-2.09	39.89
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	3282.60	43.20 PK	74.00	-30.80	1.00 V	314	11.01	32.19
2	3282.60	29.20 AV	54.00	-24.80	1.00 V	314	-2.99	32.19
3	6565.30	51.90 PK	74.00	-22.10	1.23 V	322	12.01	39.89
4	6565.30	37.80 AV	54.00	-16.20	1.23 V	322	-2.09	39.89

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 09, 2008	Dec. 08, 2009

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

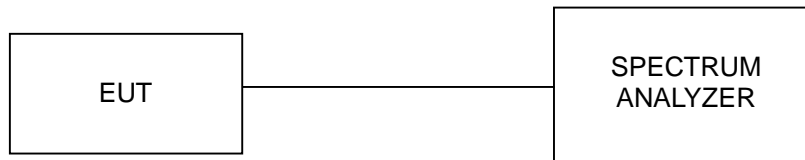

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T


4.3.7 TEST RESULTS

802.11b DSSS MODULATION:

MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 960hPa
TESTED BY	Eric Lee		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	12.07	0.5	PASS
6	2437	10.14	0.5	PASS
11	2462	10.15	0.5	PASS


CH1

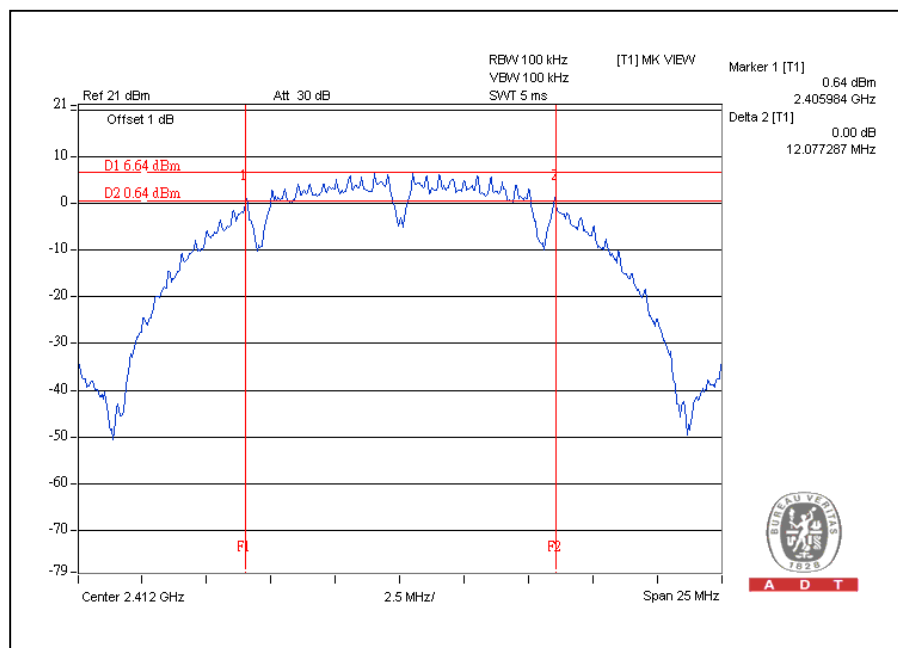




A D T

CH6

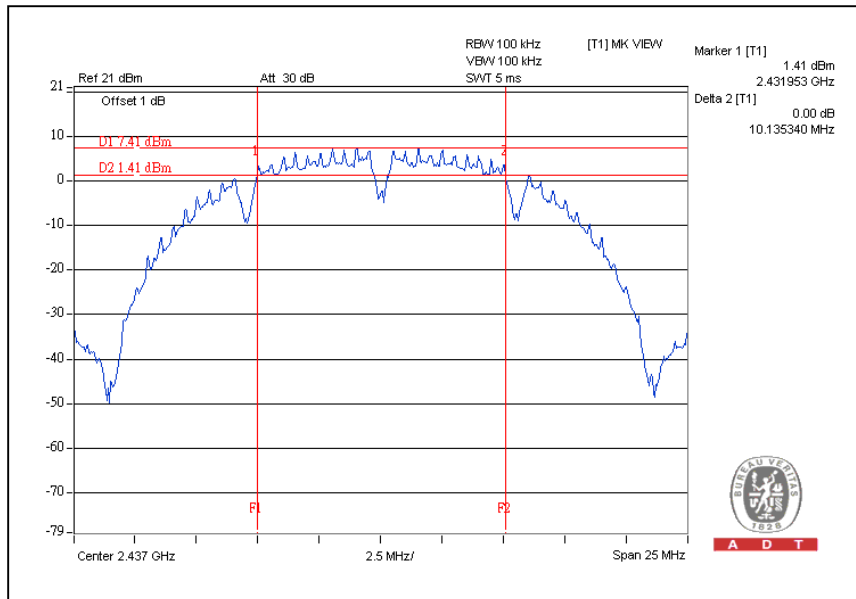

CH11

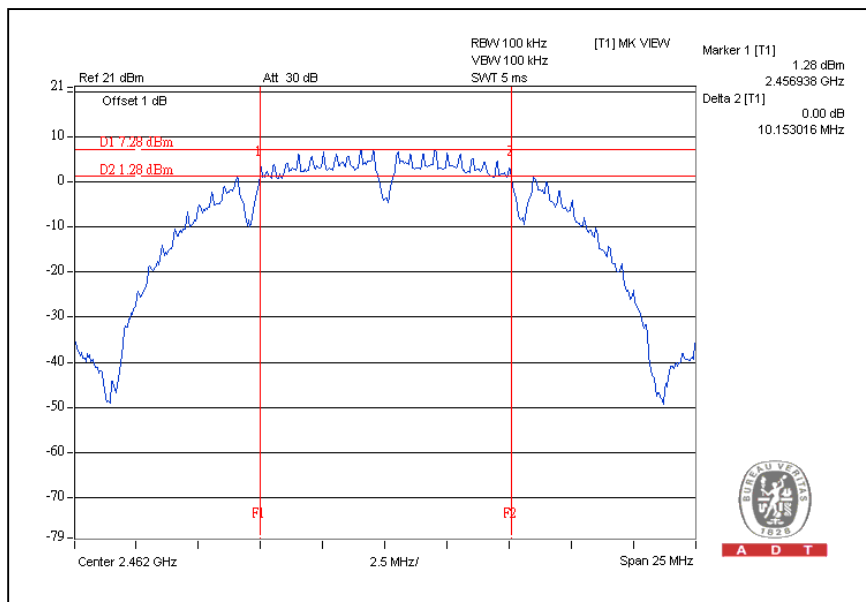




A D T

802.11g OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 960hPa
TESTED BY	Eric Lee		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.41	0.5	PASS
6	2437	16.43	0.5	PASS
11	2462	16.39	0.5	PASS


CH1

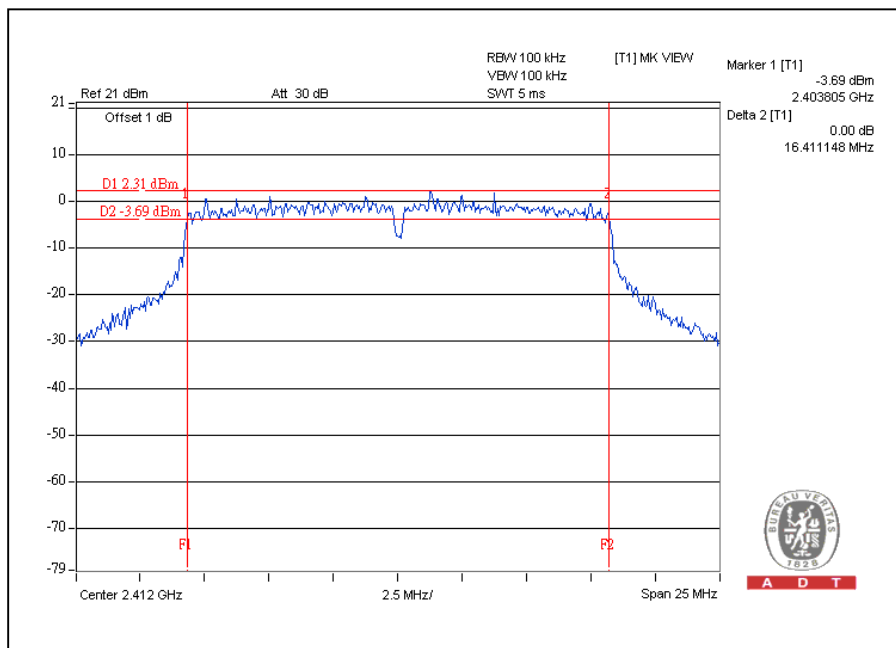




A D T

CH6

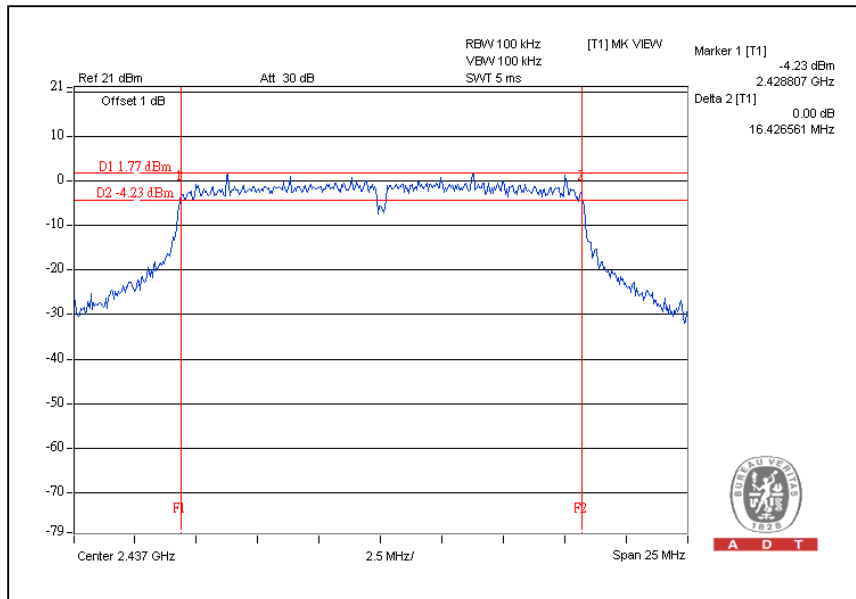

CH11

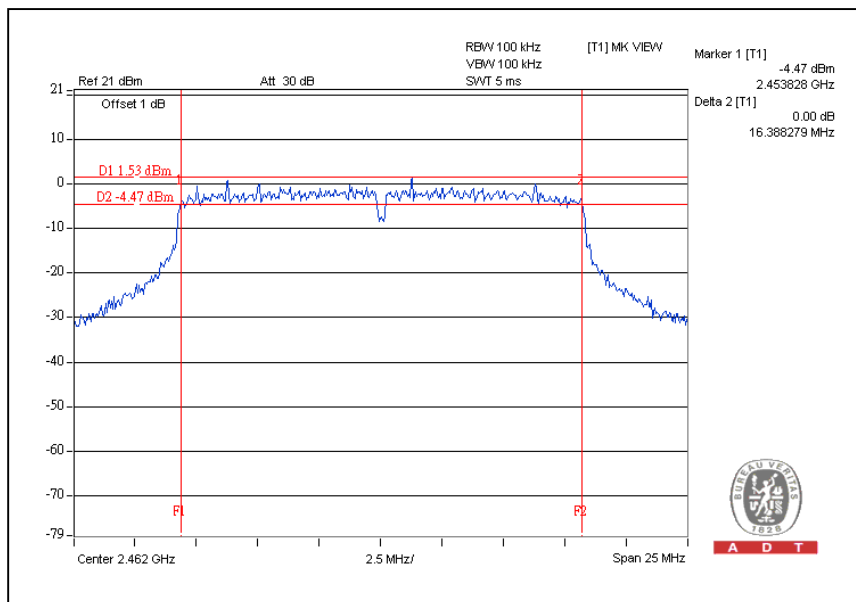




A D T

DRAFT 802.11n (20MHz) OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	6.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 960hPa
TESTED BY	Eric Lee		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN(0)	CHAIN(1)		
1	2412	17.57	17.56	0.5	PASS
6	2437	17.62	17.66	0.5	PASS
11	2462	17.64	17.66	0.5	PASS


For Chain(0): CH1

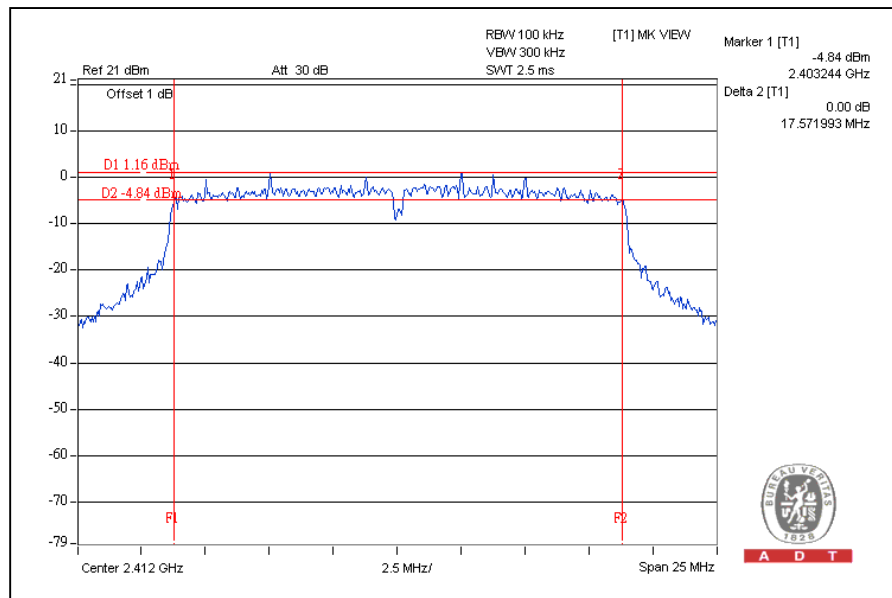




A D T

CH6

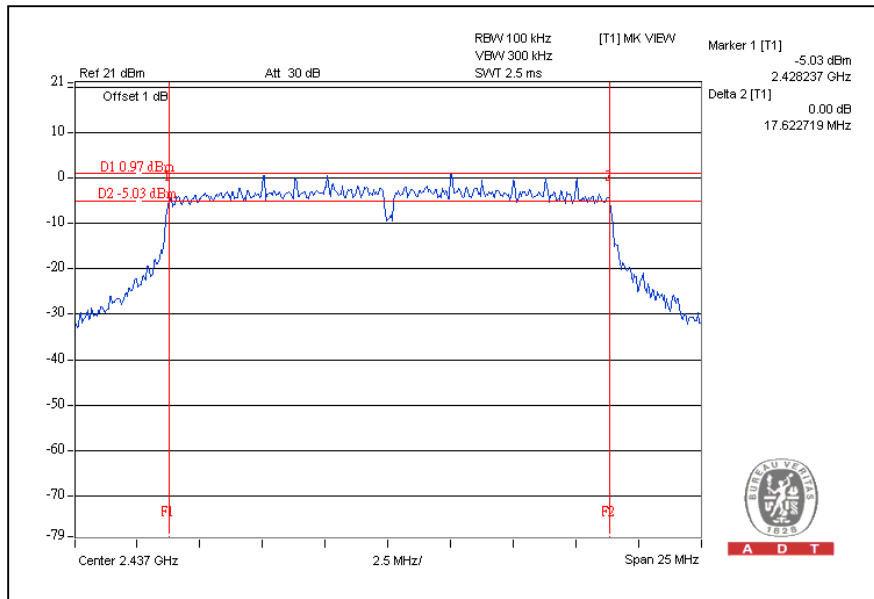


CH11

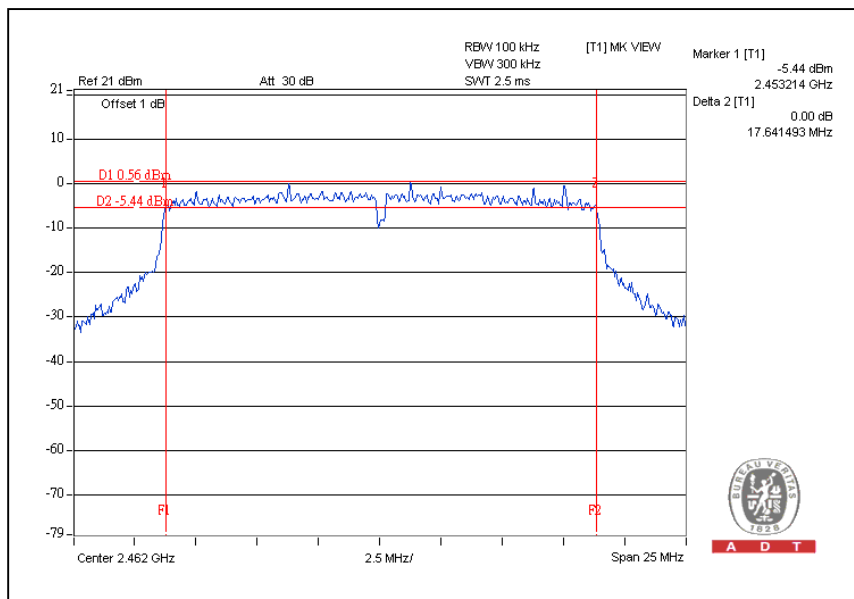




A D T

For CHAIN(1): CH1

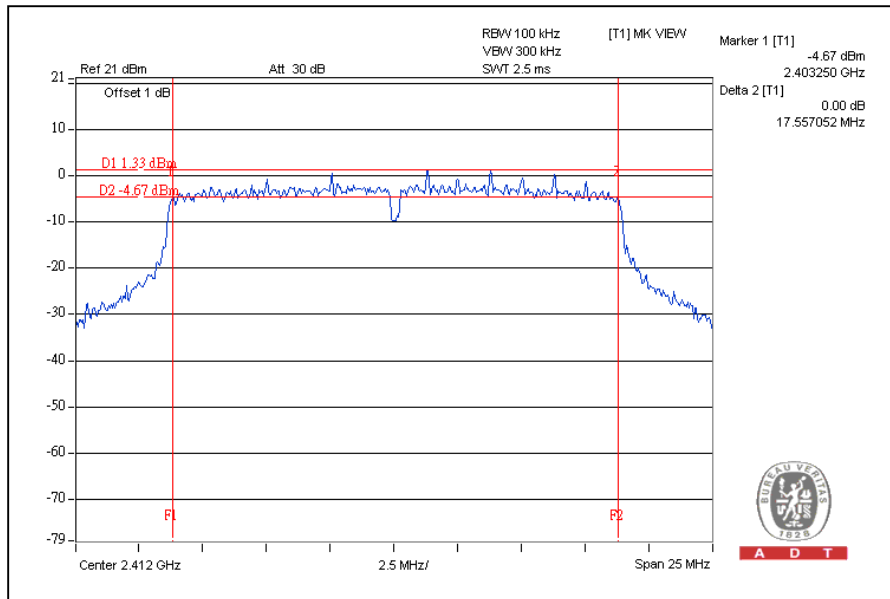


CH6

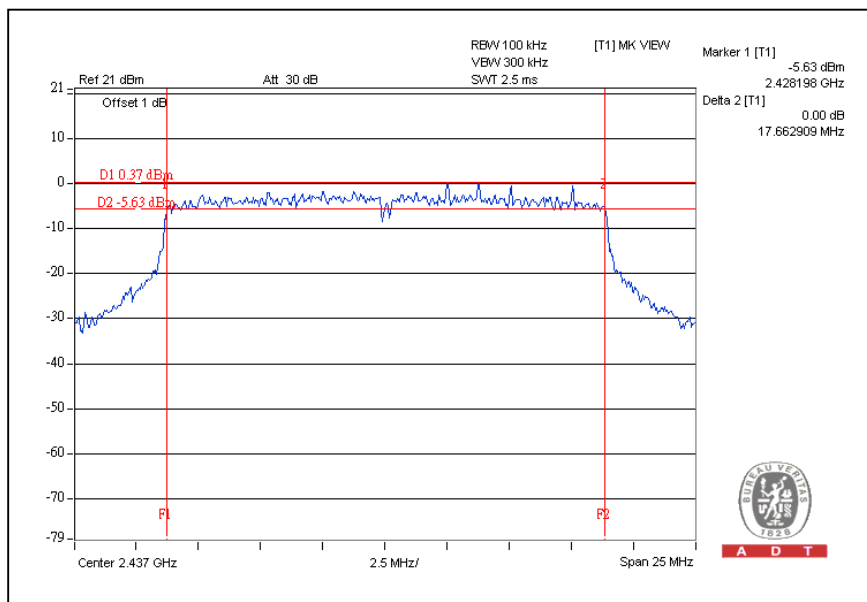



A D T

CH11

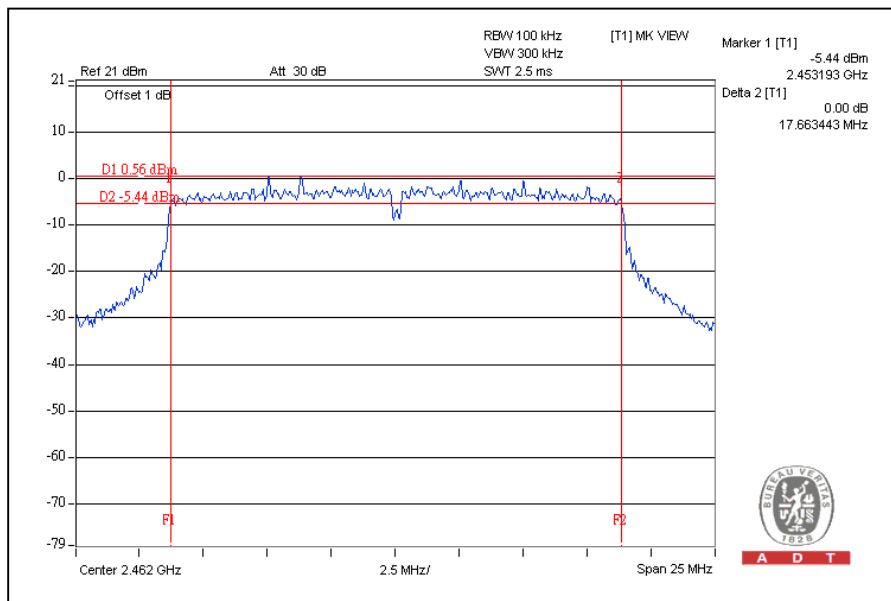




A D T

DRAFT 802.11n (40MHz) OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	13.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 960hPa
TESTED BY	Eric Lee		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN(0)	CHAIN(1)		
1	2422	36.51	36.53	0.5	PASS
4	2437	36.49	36.50	0.5	PASS
7	2452	36.46	36.45	0.5	PASS


For Chain (0): CH1

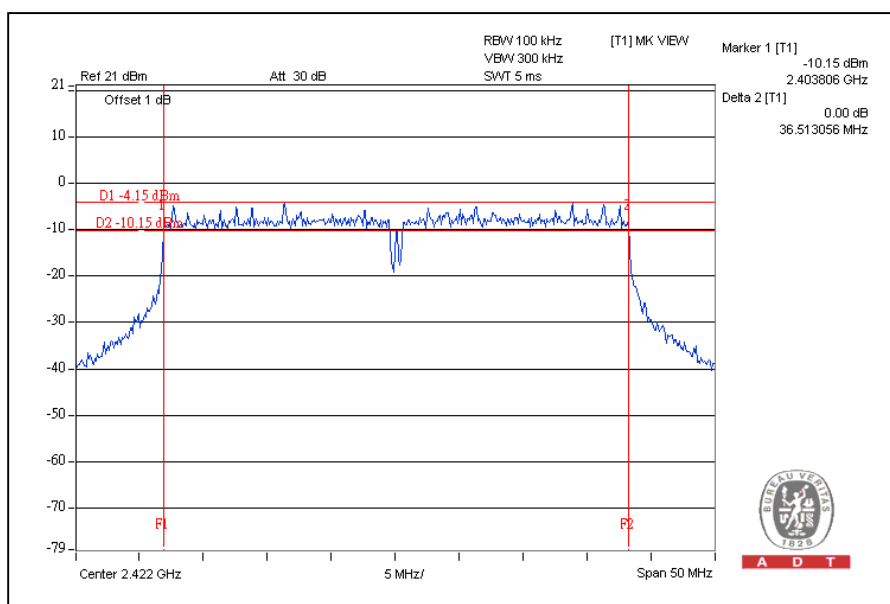




A D T

CH4

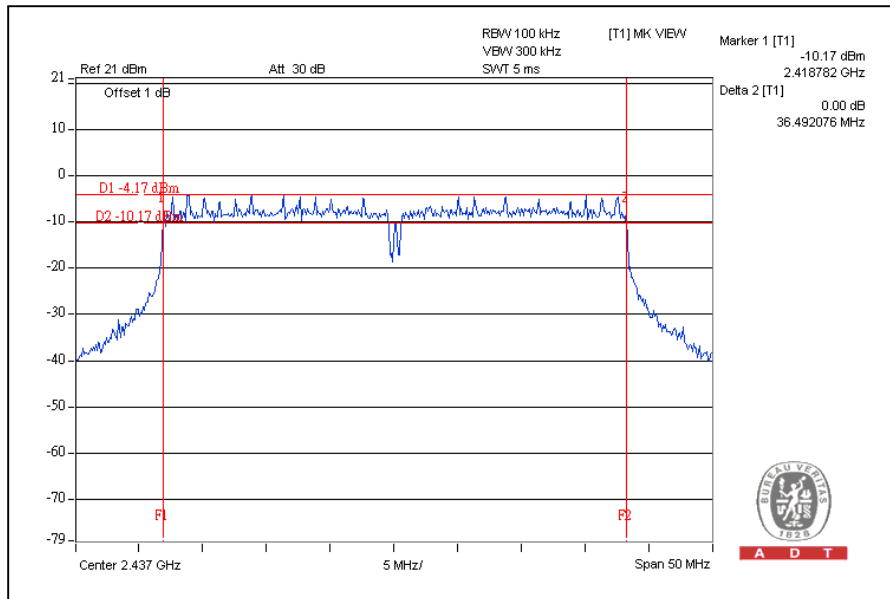


CH7

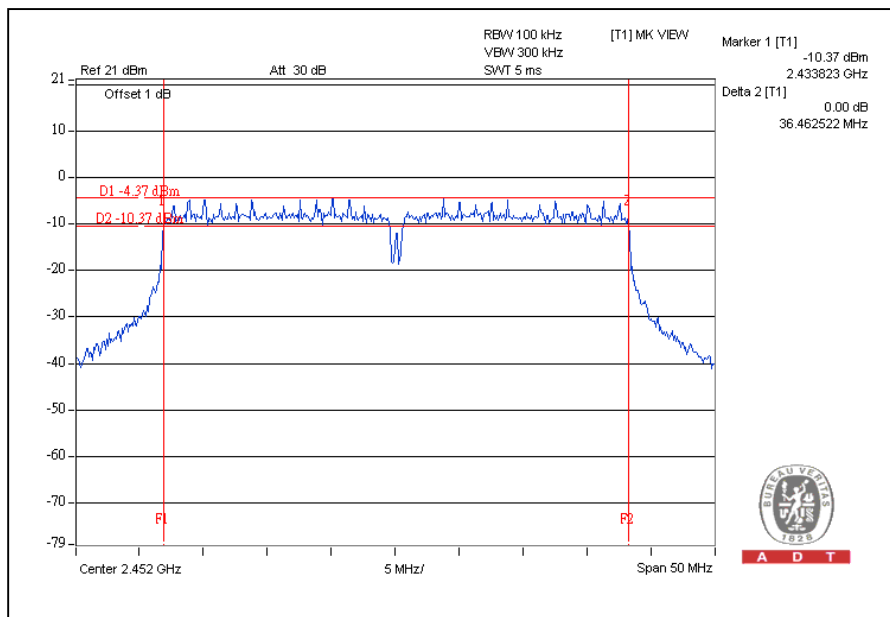




A D T

For Chain (1): CH1

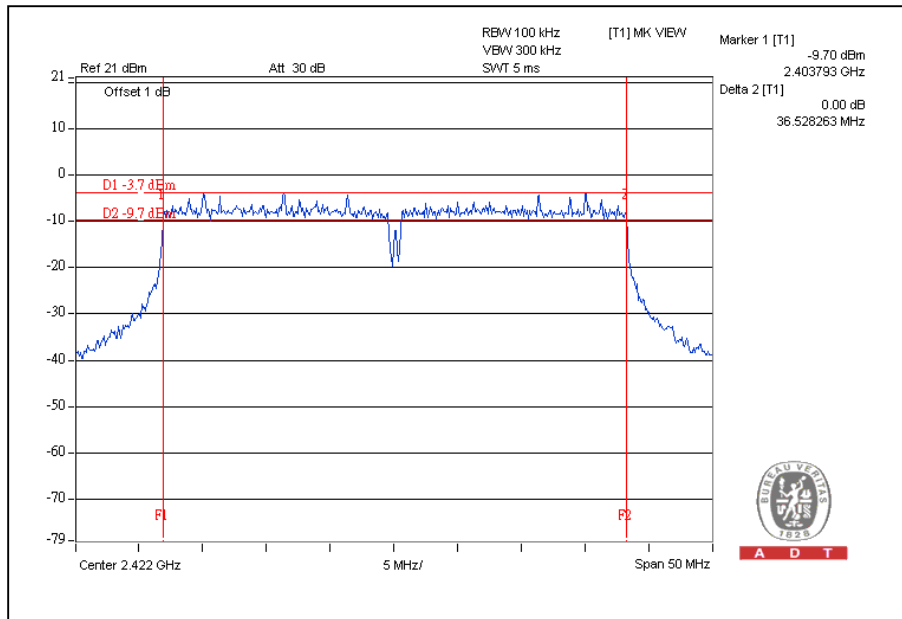


CH4

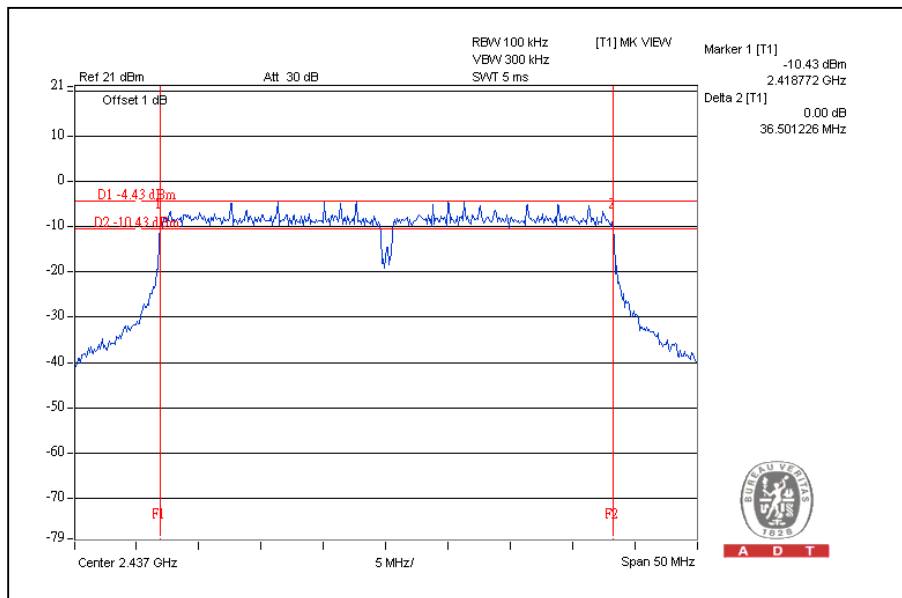



A D T

CH7

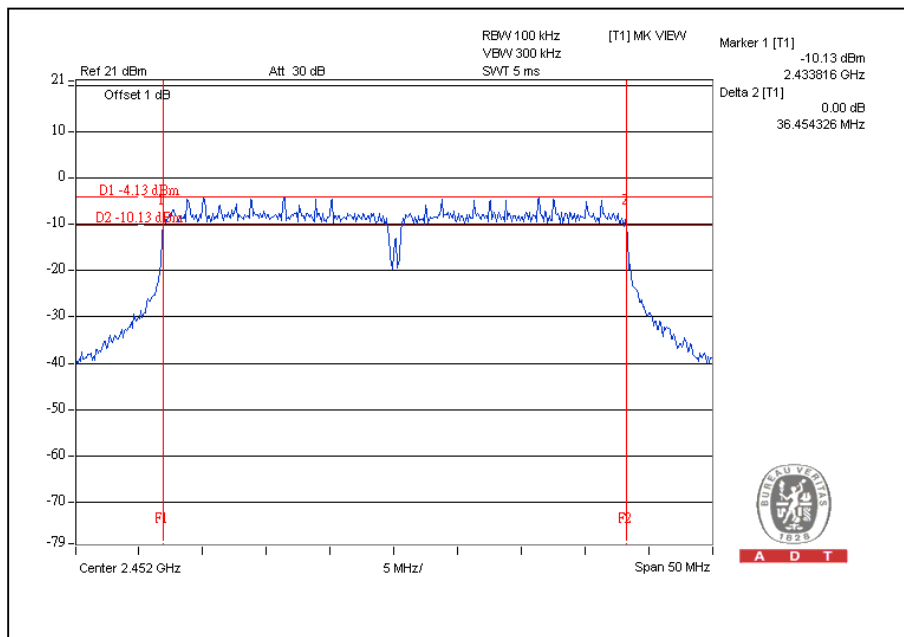



4.4 20dB BANDWIDTH MEASUREMENT

4.4.1 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 09, 2008	Aug. 08, 2009


NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.2 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.4.3 TEST SETUP



4.4.4 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T


4.4.5 TEST RESULTS

802.11b DSSS MODULATION:

MODULATION TYPE	CCK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 960hPa
TESTED BY	Eric Lee		

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
1	2412	17.29
6	2437	17.29
11	2462	17.26


CH1

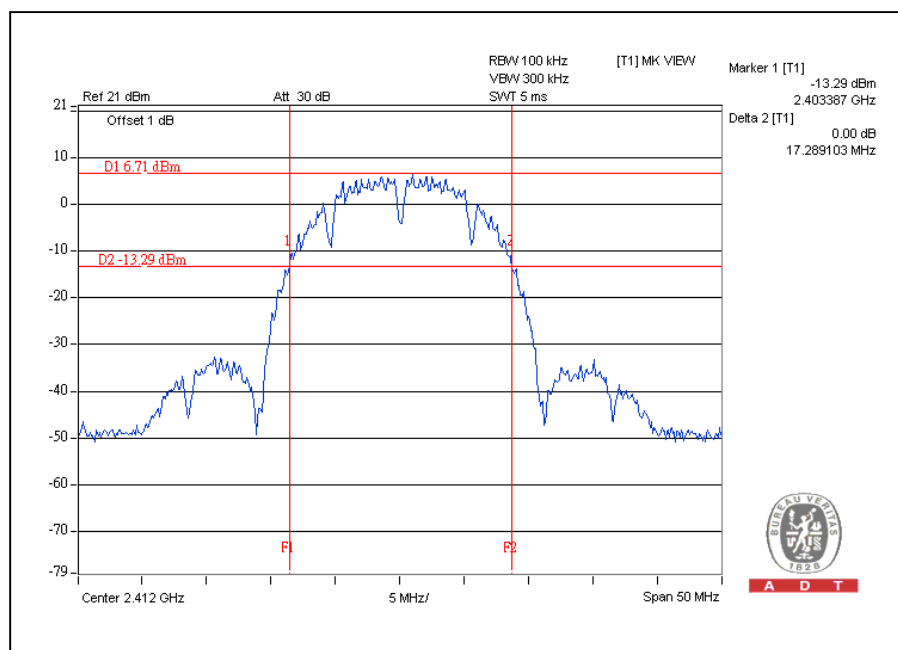




A D T

CH6

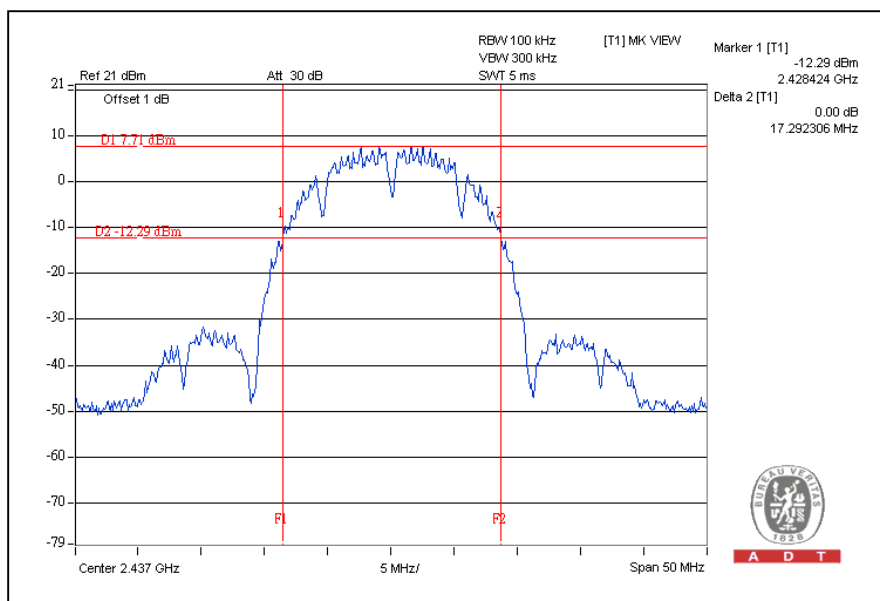

CH11

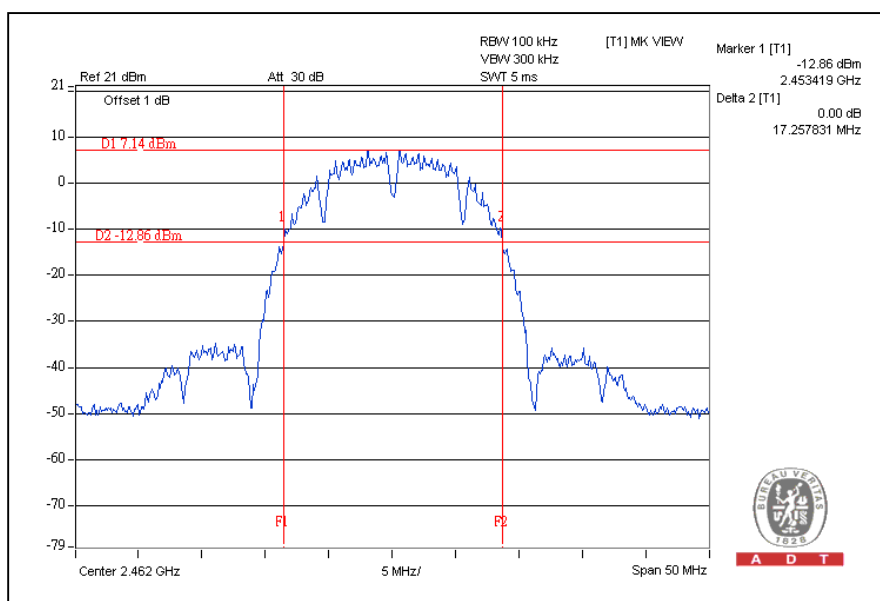




A D T

802.11g OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 960hPa
TESTED BY	Eric Lee		

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
1	2412	18.08
6	2437	17.98
11	2462	17.60


CH1

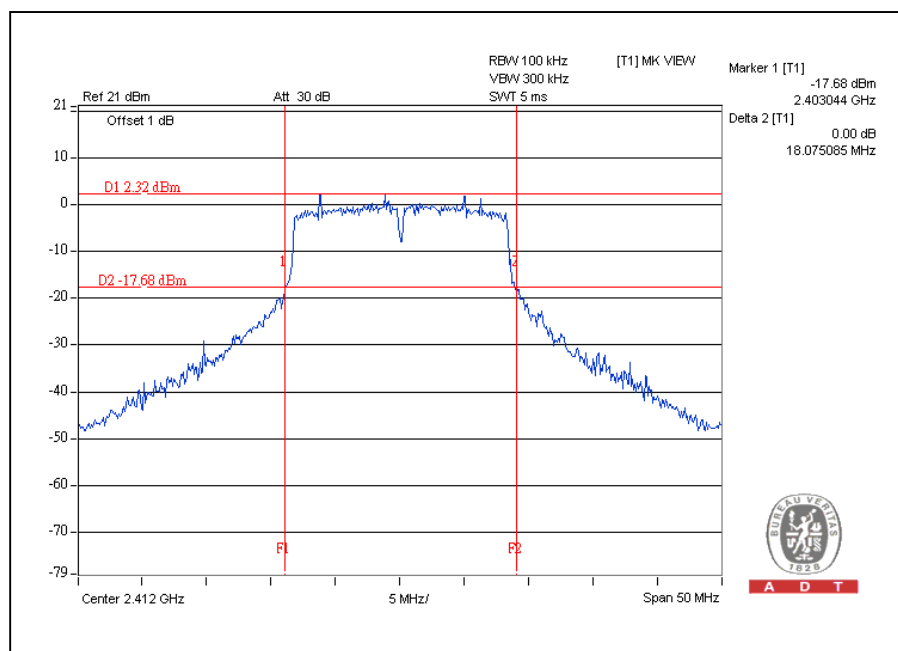




A D T

CH6

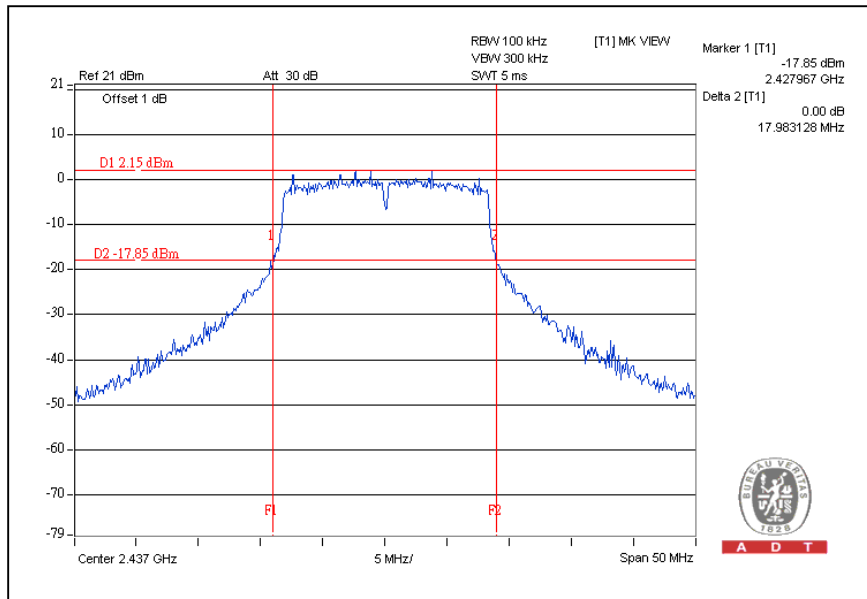

CH11

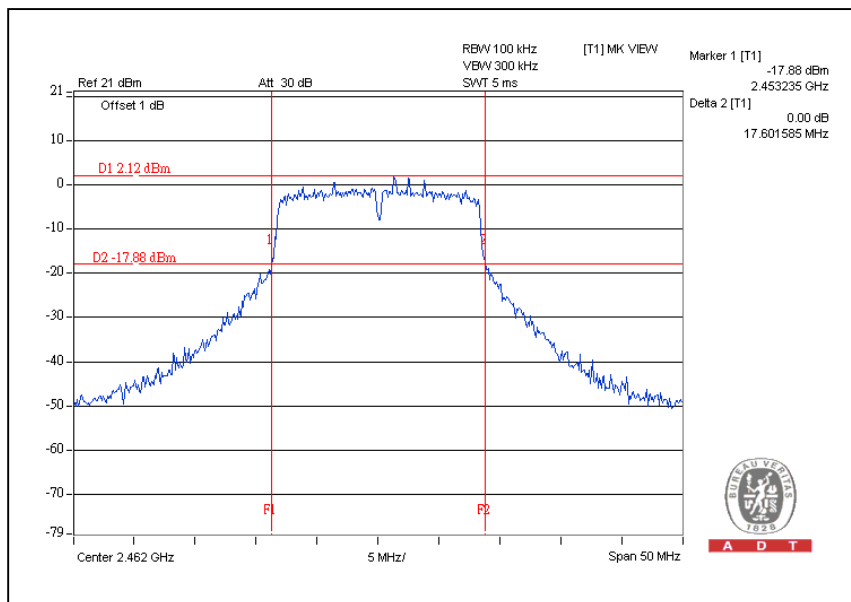




A D T

DRAFT 802.11n (20MHz) OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	6.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 960hPa
TESTED BY	Eric Lee		

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)	
		CHAIN (0)	CHAIN (1)
1	2412	19.00	18.58
6	2437	18.90	18.88
11	2462	18.95	19.06


For Chain (0): CH1

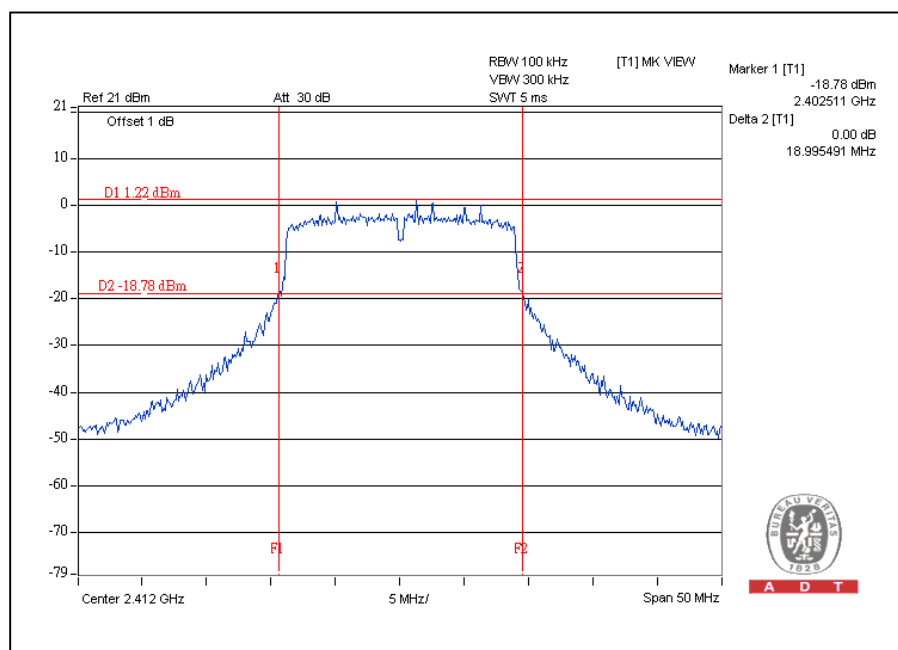




A D T

CH6

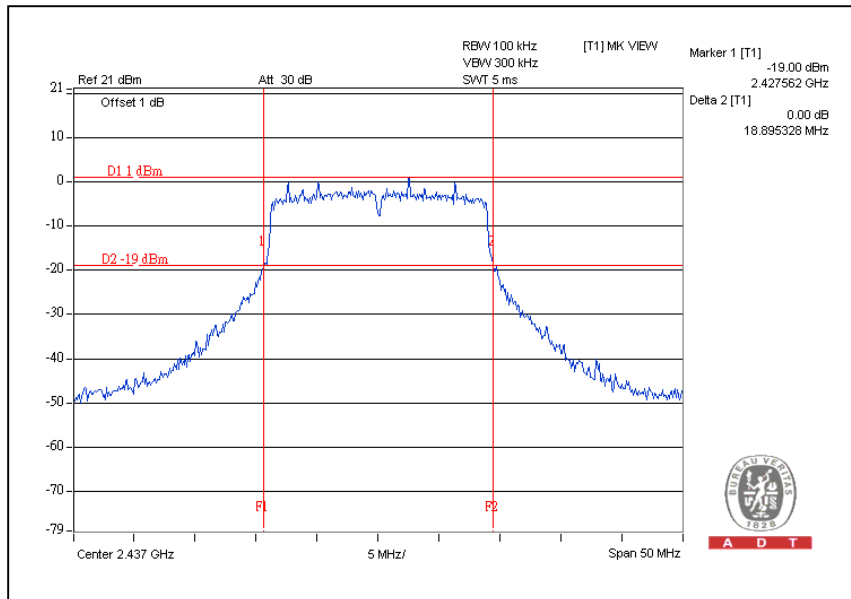


CH11

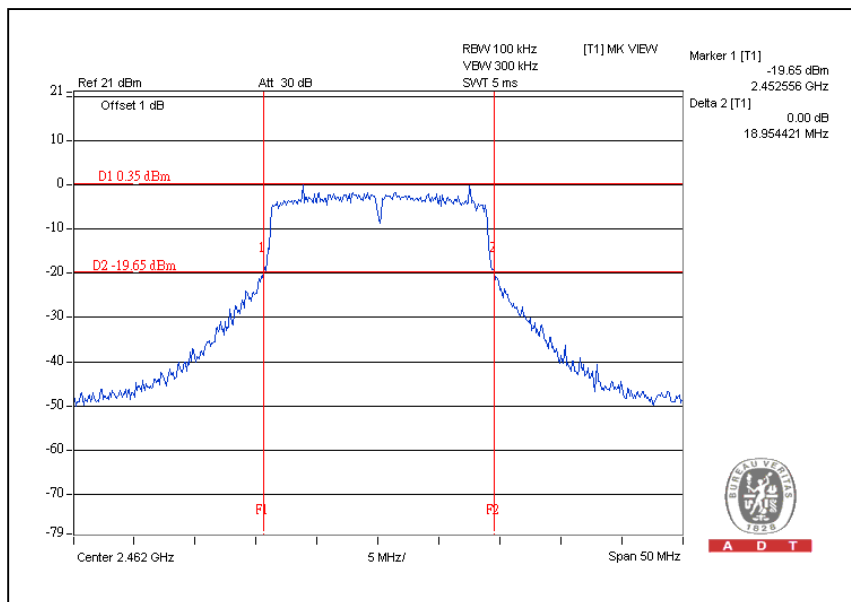




A D T

For Chain (1): CH1

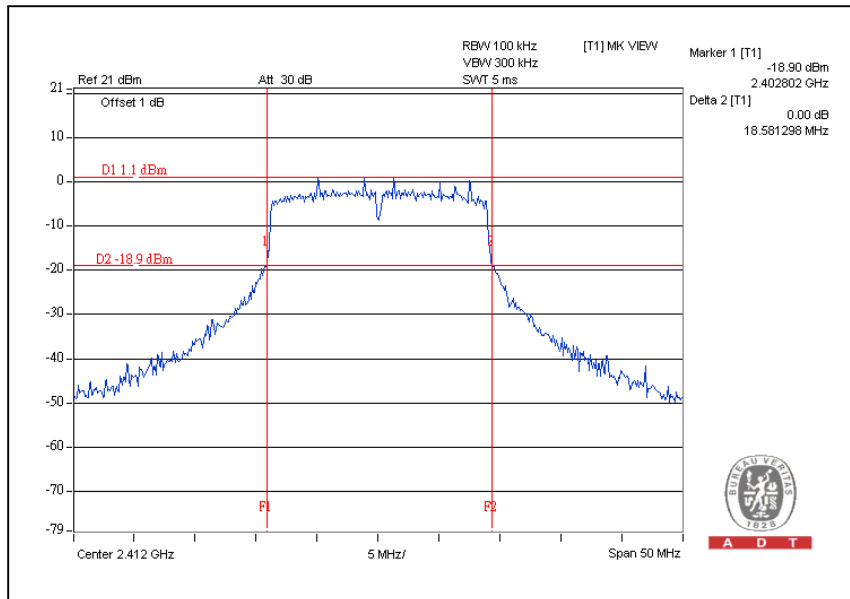


CH6

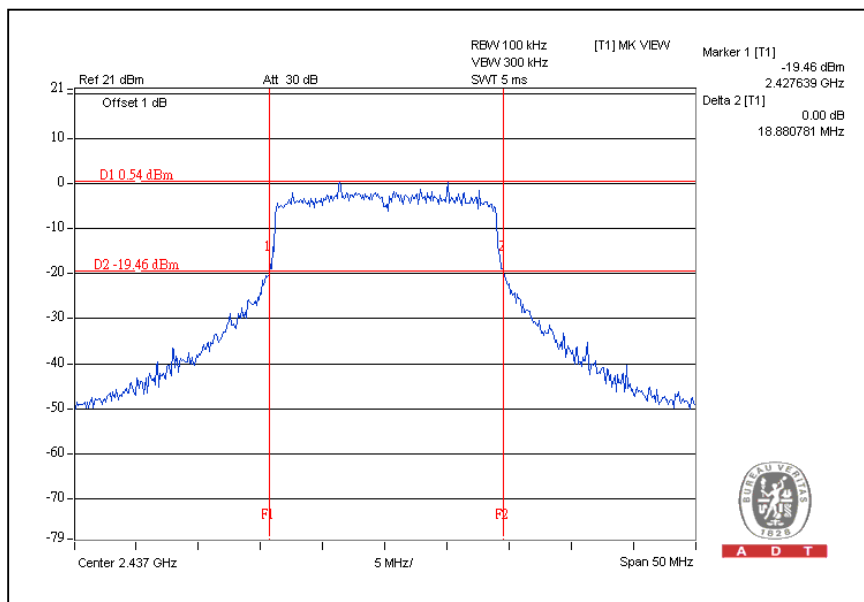



A D T

CH11

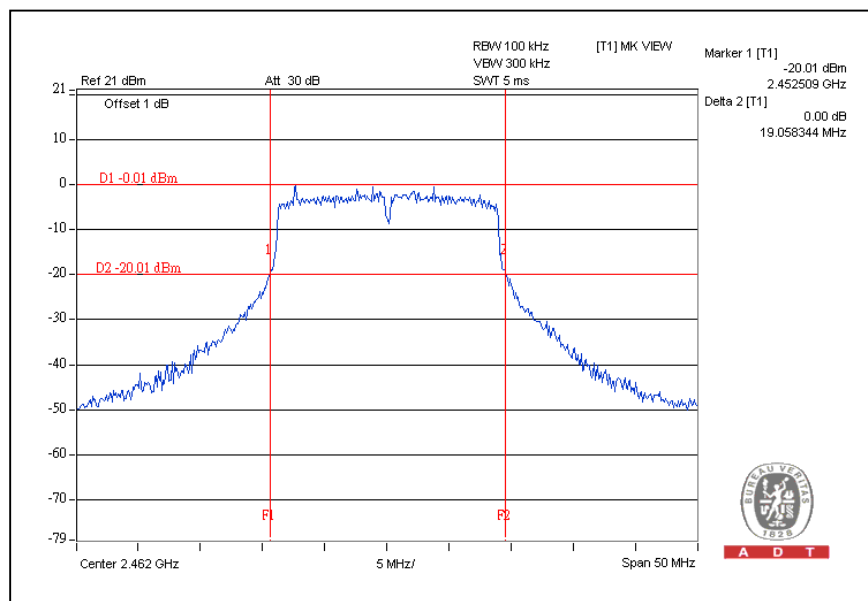




A D T

DRAFT 802.11n (40MHz) OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	13.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 960hPa
TESTED BY	Eric Lee		

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)	
		CHAIN (0)	CHAIN (1)
1	2422	38.06	37.95
4	2437	37.70	37.76
7	2452	38.06	38.27


For Chain (0): CH1

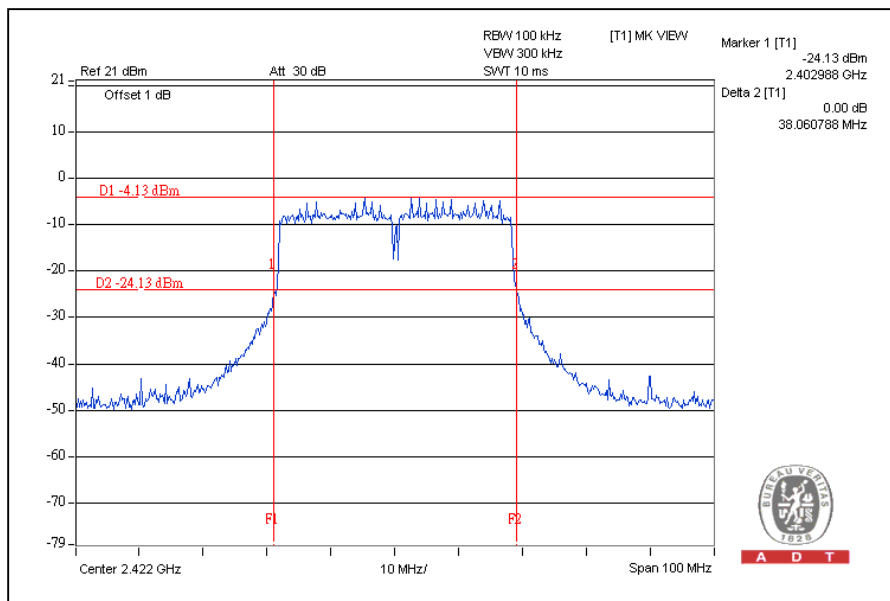




A D T

CH4

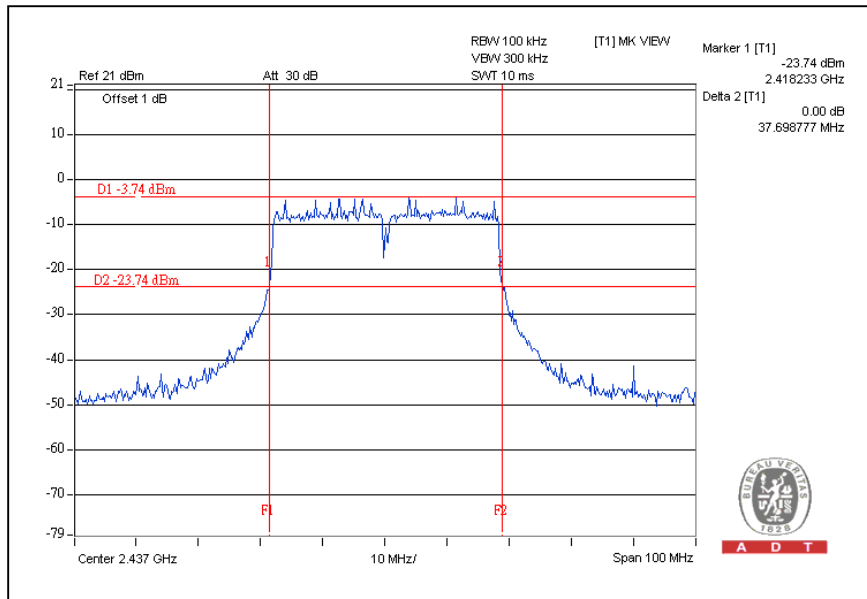


CH7

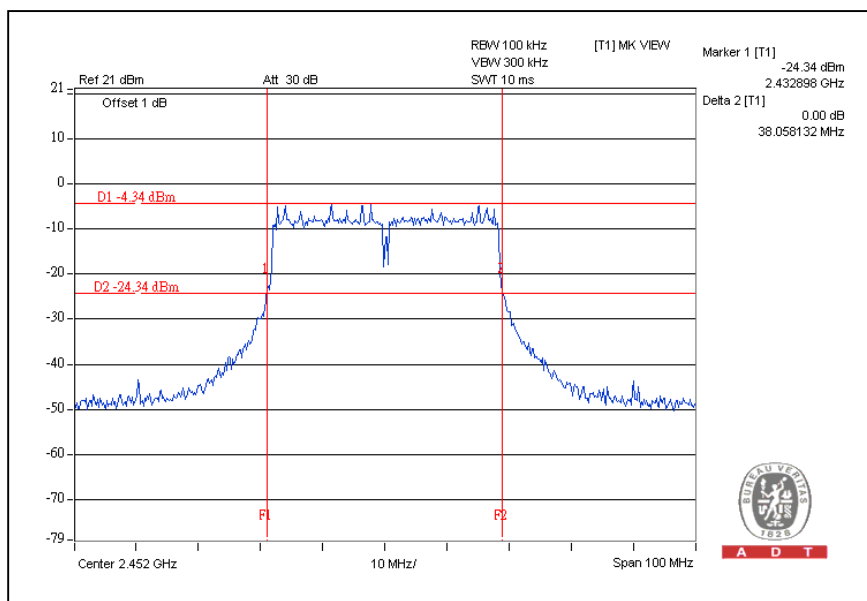




A D T

For Chain (1): CH1

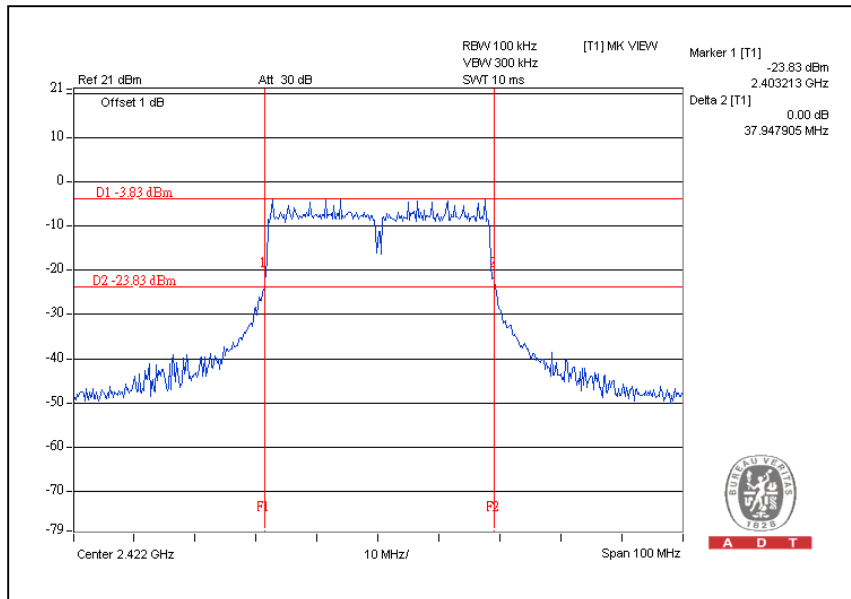


CH4

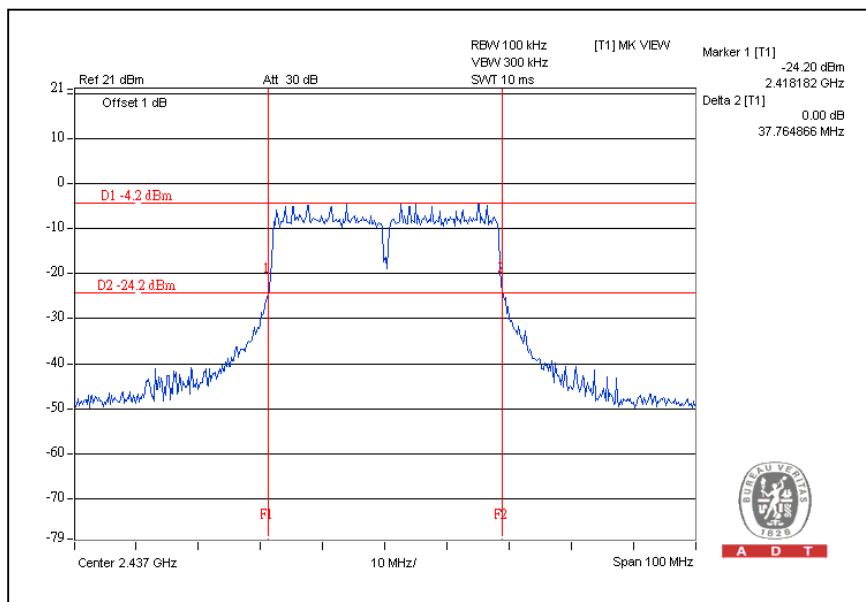



A D T

CH7

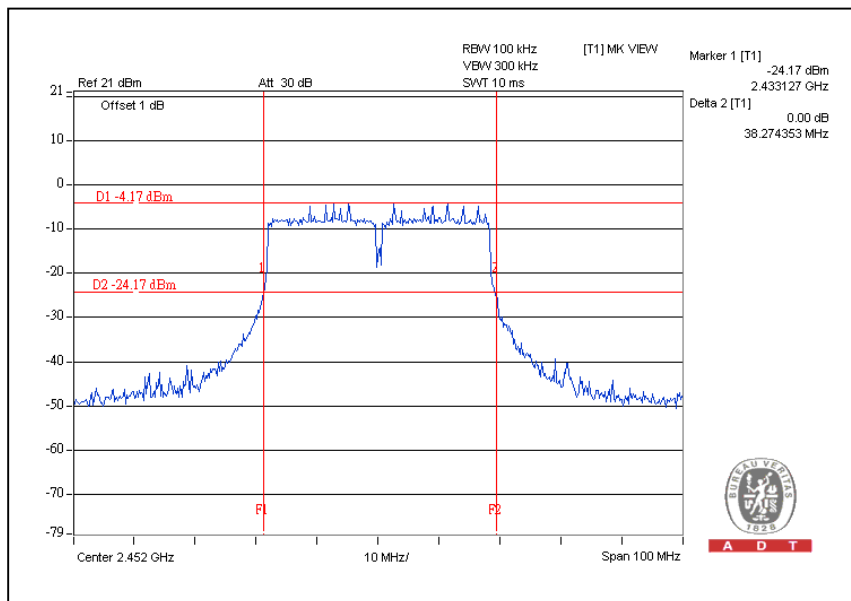



4.5 MAXIMUM PEAK OUTPUT POWER

4.5.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.5.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 13, 2008	Aug. 12, 2009
Agilent SIGNAL GENERATOR	E8257C	MY43320668	Dec. 26, 2007	Feb. 24, 2009
Anritsu Power Meter	ML2495A	0824006	June 14, 2008	June 13, 2009
Pulse Power Sensor	MA2411B	0738172	April 17, 2008	April 16, 2009

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

4. The transmitter output was connected to the power meter through an attenuator; the bandwidth of the fundamental frequency was measured with the power meter.
5. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

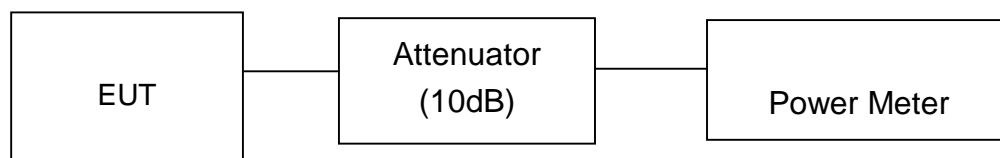

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.2.6



4.4.7 TEST RESULTS

802.11b DSSS MODULATION:

MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 960hPa
TESTED BY	Eric Lee		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER OUTPUT (mW)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	20.3	107.2	30	PASS
6	2437	20.5	112.2	30	PASS
11	2462	20.5	112.2	30	PASS

802.11g OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 960hPa
TESTED BY	Eric Lee		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER OUTPUT (mW)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	23.3	213.8	30	PASS
6	2437	23.2	208.9	30	PASS
11	2462	23.2	208.9	30	PASS



DRAFT 802.11n (20MHz) OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	6.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 960hPa
TESTED BY	Eric Lee		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)				
1	2412	22.5	22.5	355.7	25.5	30	PASS
6	2437	22.6	22.6	363.9	25.6	30	PASS
11	2462	22.8	22.7	376.8	25.8	30	PASS

DRAFT 802.11n (40MHz) OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	13.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 960hPa
TESTED BY	Eric Lee		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)				
1	2422	21.8	21.8	302.7	24.8	30	PASS
4	2437	21.7	21.8	299.3	24.8	30	PASS
7	2452	21.8	21.7	299.3	24.8	30	PASS



A D T

4.6 POWER SPECTRAL DENSITY MEASUREMENT

4.6.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 09, 2008	Dec. 08, 2009

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.


4.6.4 DEVIATION FROM TEST STANDARD

No deviation



A D T

4.6.5 TEST SETUP



4.6.6 EUT OPERATING CONDITION

Same as Item 4.2.6



A D T


4.6.7 TEST RESULTS

802.11b DSSS MODULATION:

MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 960hPa
TESTED BY	Eric Lee		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2412	-7.3	8	PASS
6	2437	-6.7	8	PASS
11	2462	-7.4	8	PASS


CH1

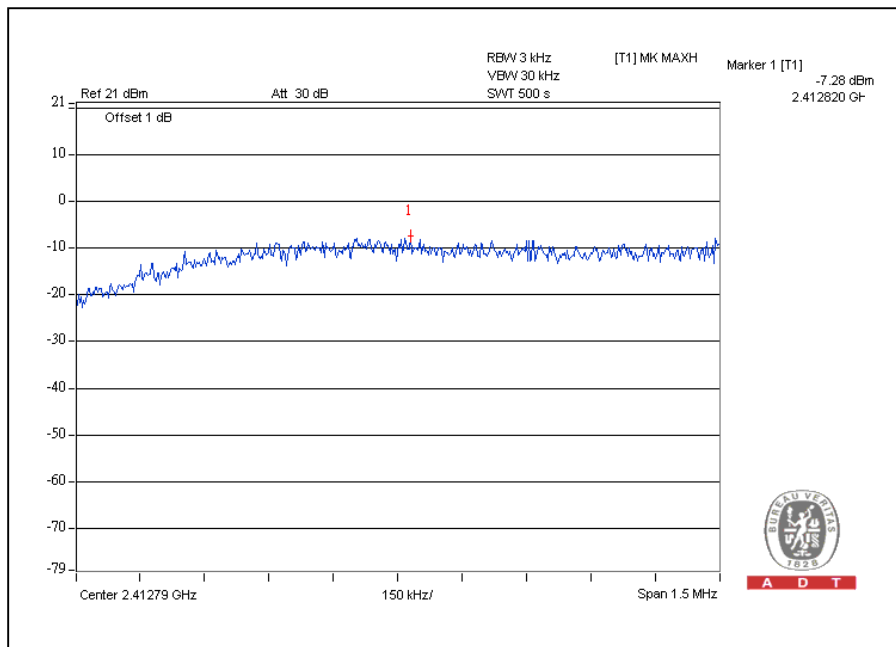




A D T

CH6

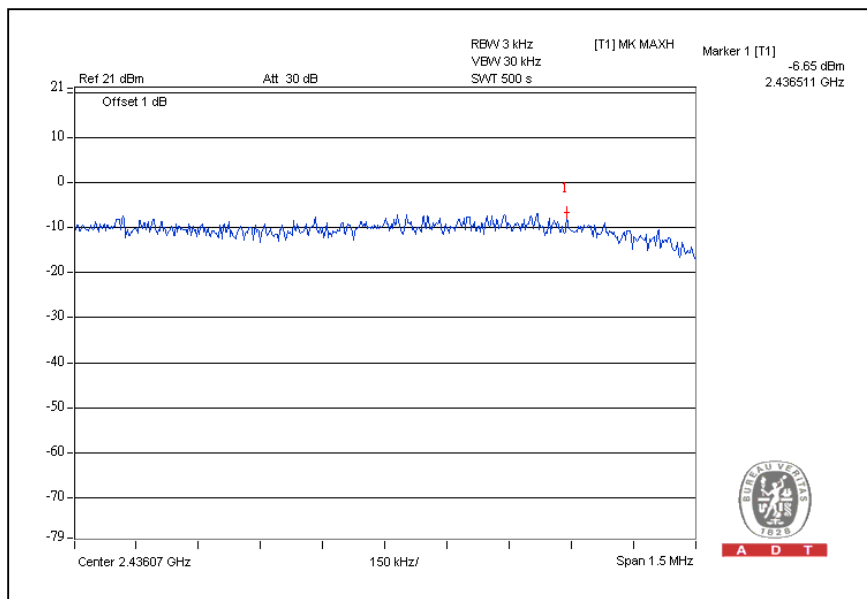

CH11

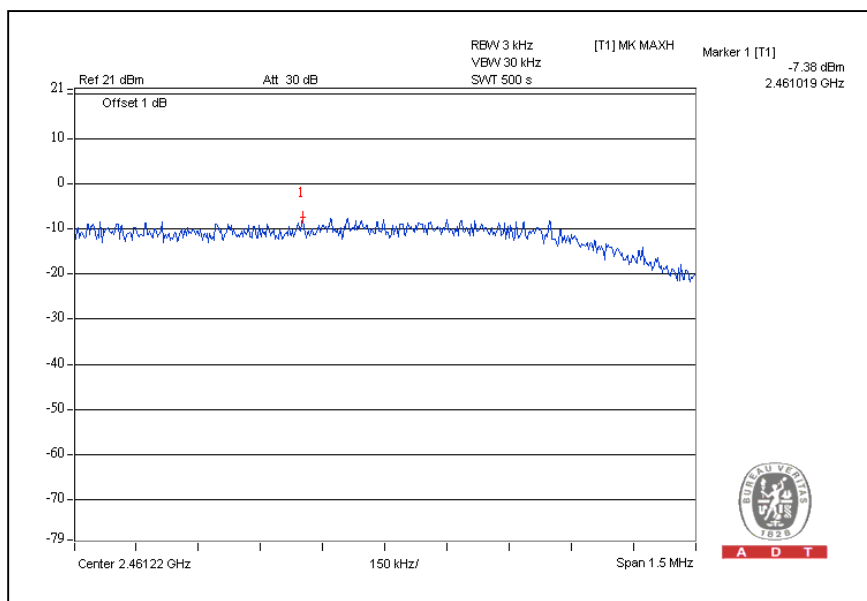




A D T

802.11g OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 960hPa
TESTED BY	Eric Lee		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2412	-10.6	8	PASS
6	2437	-11.7	8	PASS
11	2462	-11.2	8	PASS

CH1

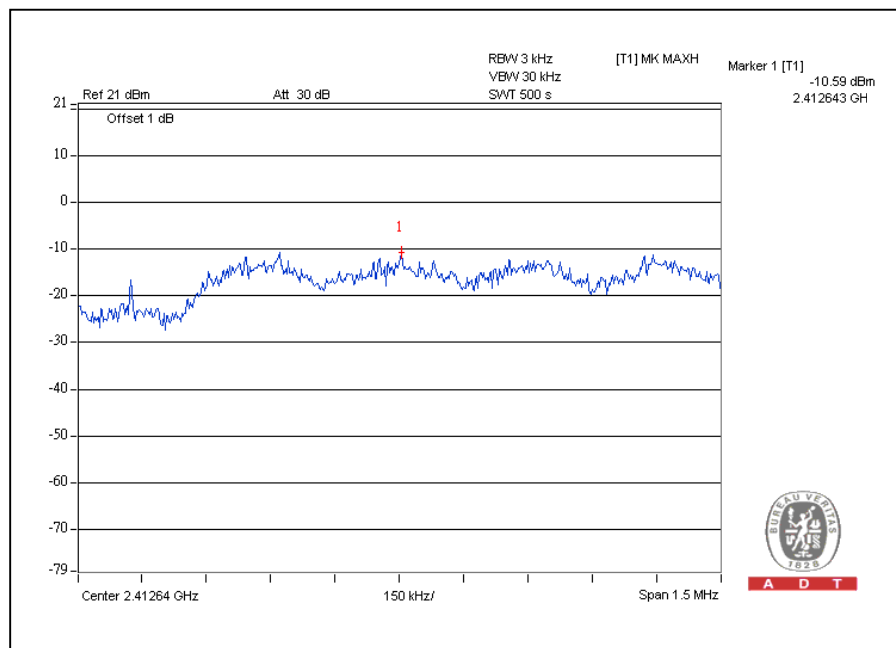




A D T

DRAFT 802.11n (20MHz) OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	6.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 960hPa
TESTED BY	Eric Lee		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)				
1	2412	-12.3	-13.5	0.1	-10.0	8	PASS
6	2437	-13.0	-8.5	0.2	-7.0	8	PASS
11	2462	-13.5	-13.5	0.1	-10.0	8	PASS


For Chain(0): CH1

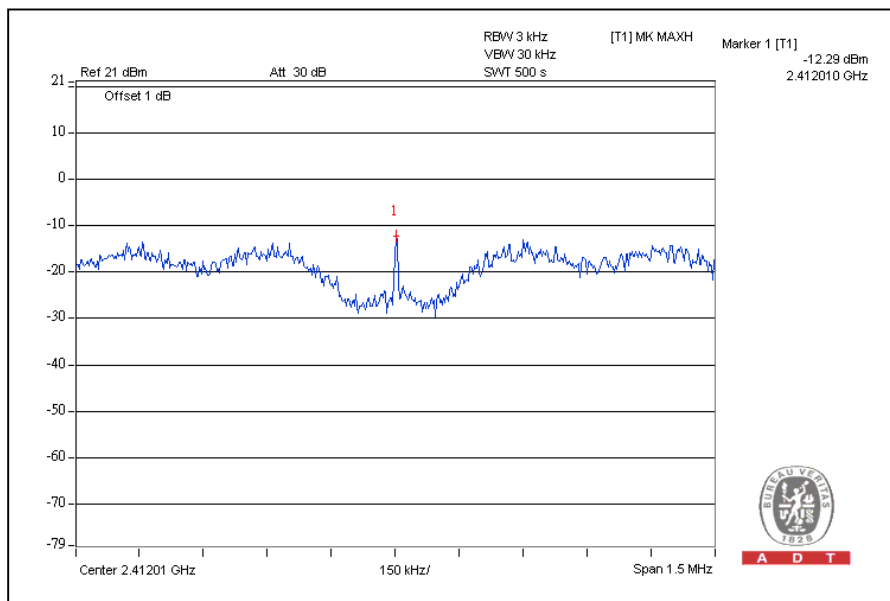




A D T

CH6

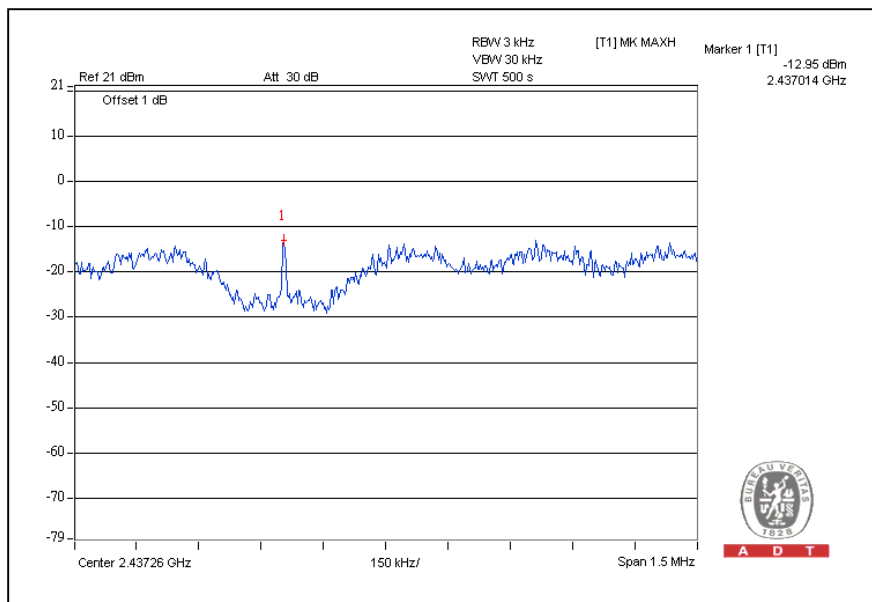


CH11

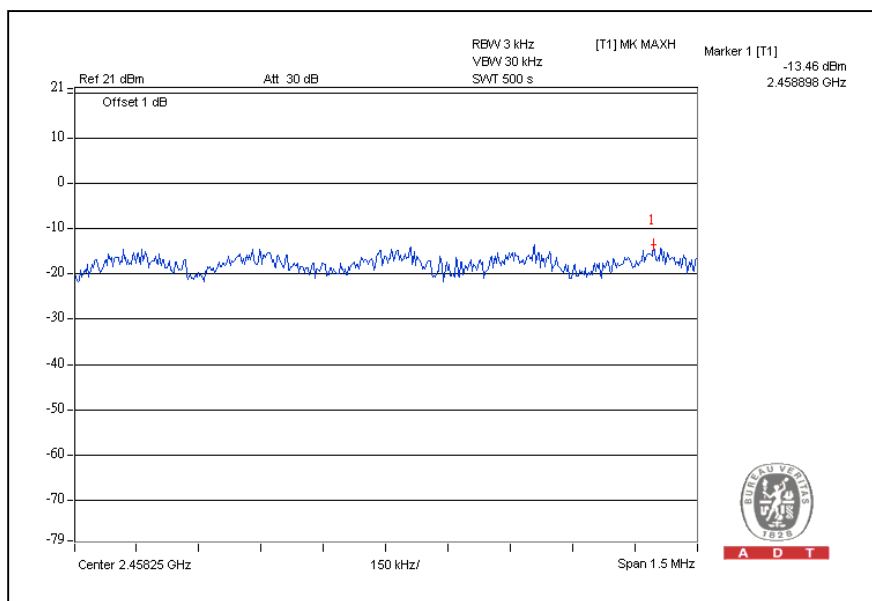




A D T

For Chain (1): CH1

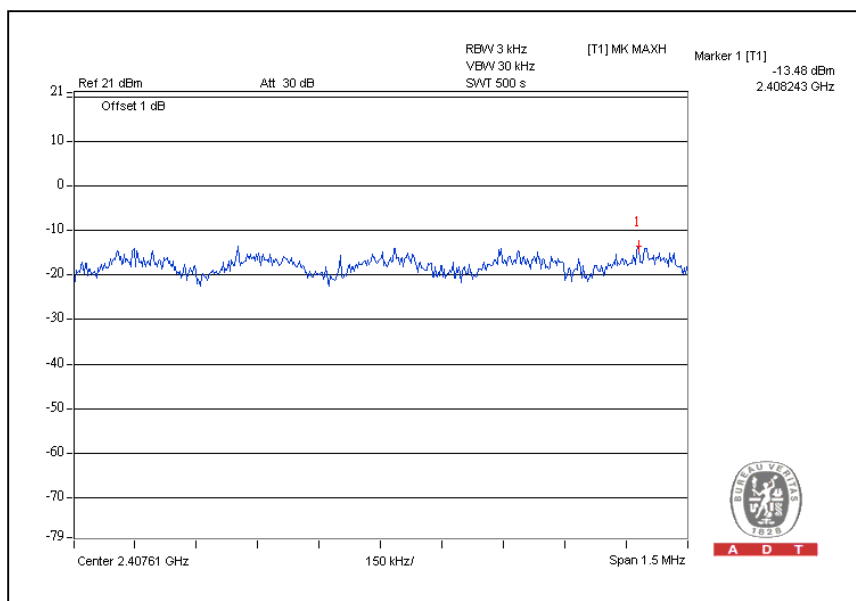


CH6

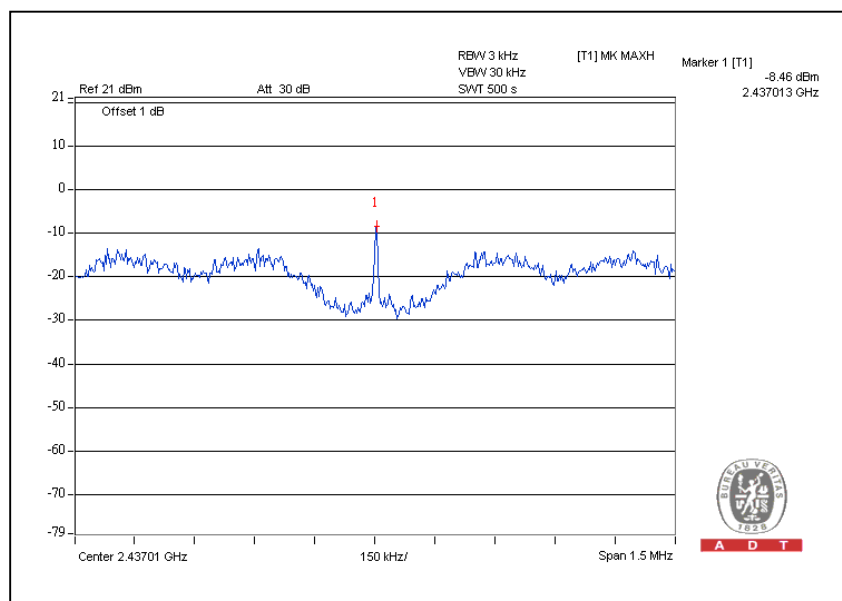



A D T

CH11

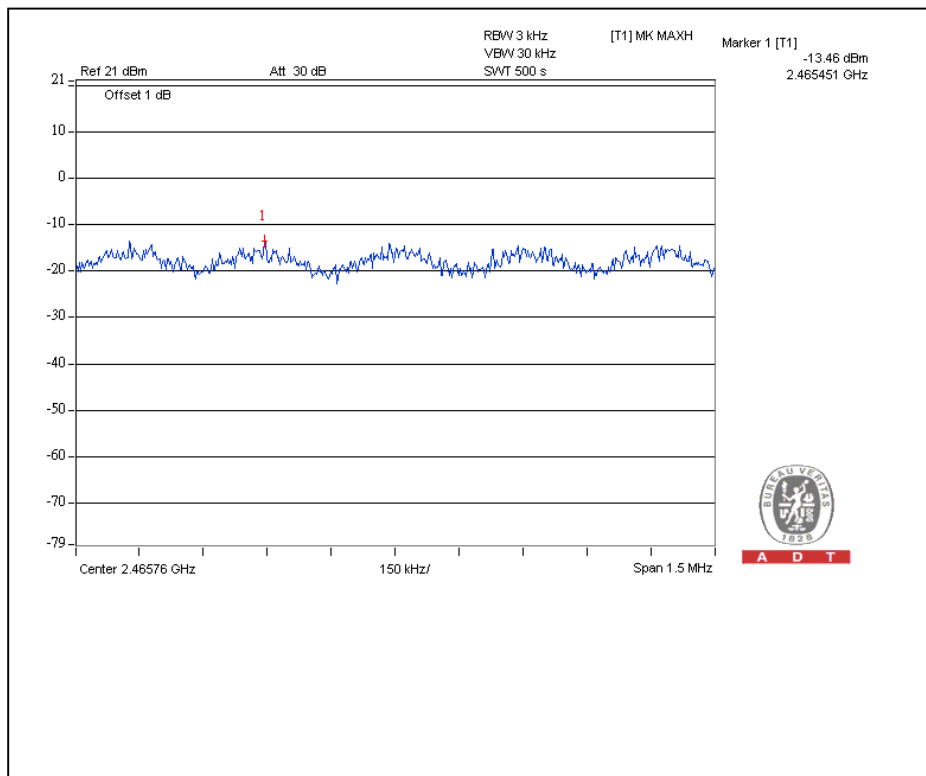




A D T

DRAFT 802.11n (40MHz) OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	13.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 960hPa
TESTED BY	Eric Lee		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)				
1	2422	-13.3	-15.1	0.1	-10.0	8	PASS
4	2437	-12.8	-18.2	0.1	-10.0	8	PASS
7	2452	-14.8	-19.5	0.04	-14.0	8	PASS

For Chain (0): CH1

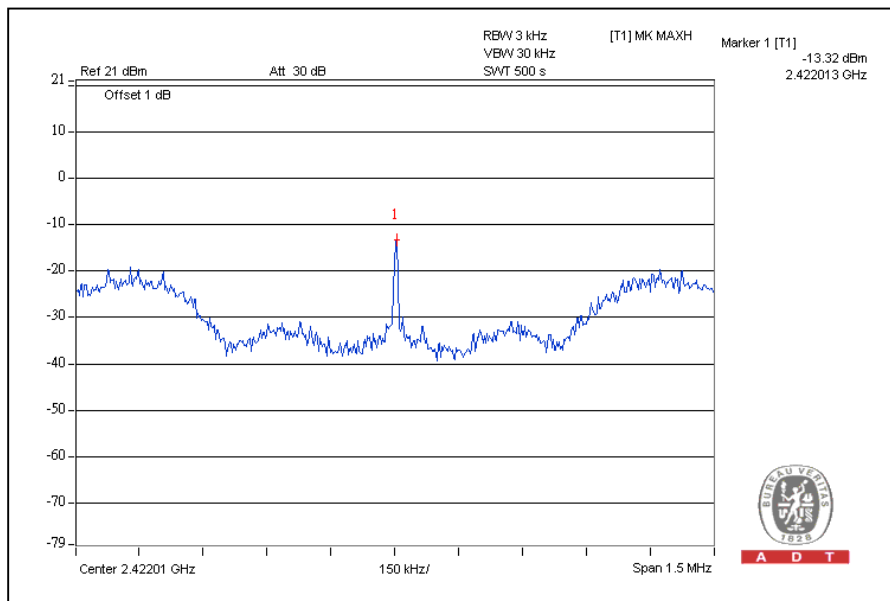


A D T




A D T

CH4

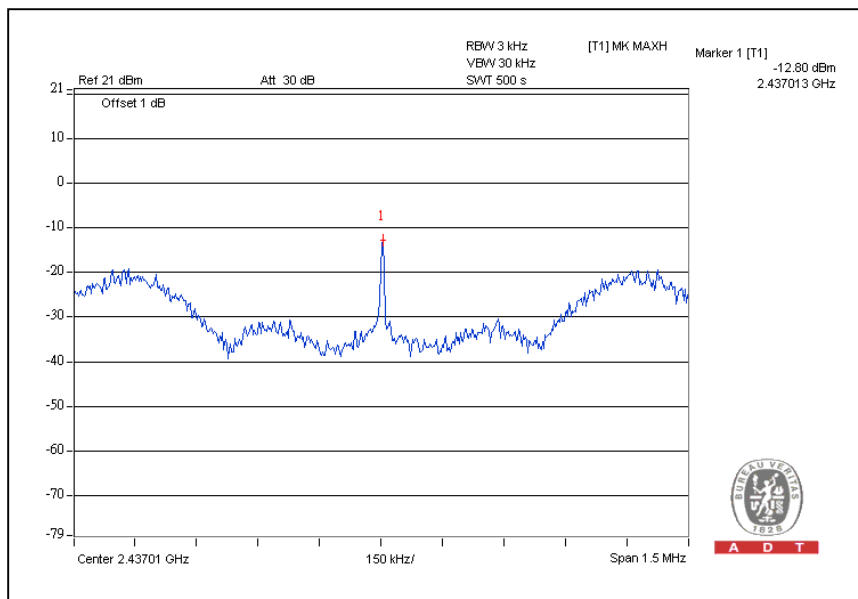


CH7

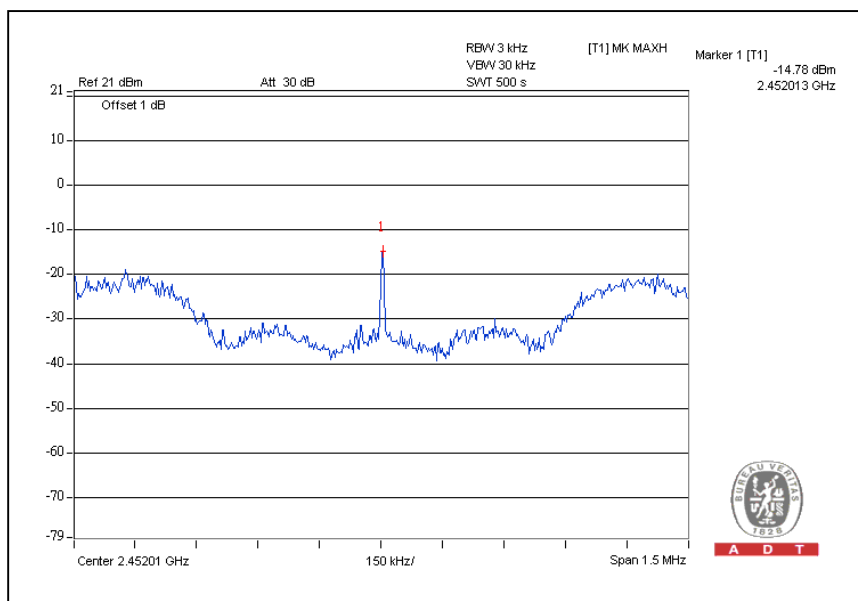




A D T

For Chain (1): CH1

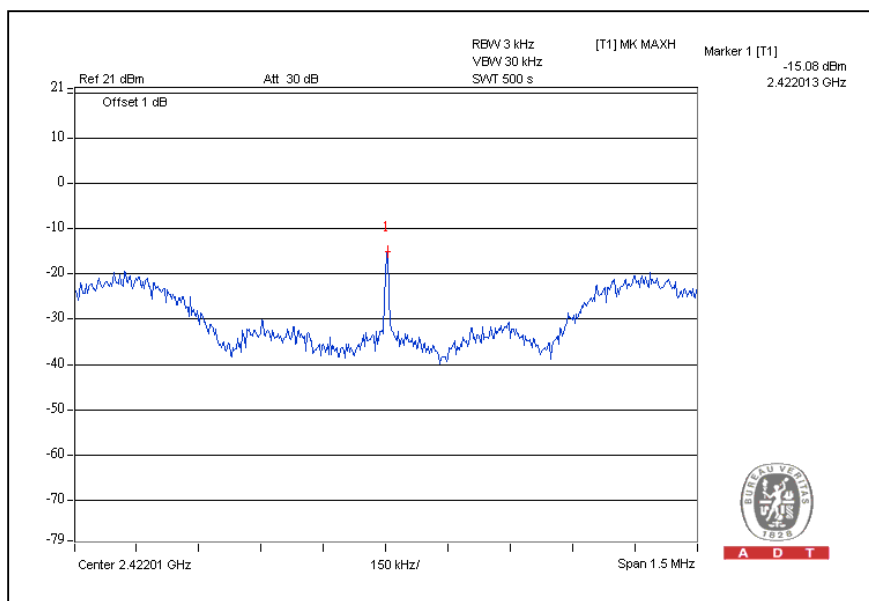


CH4

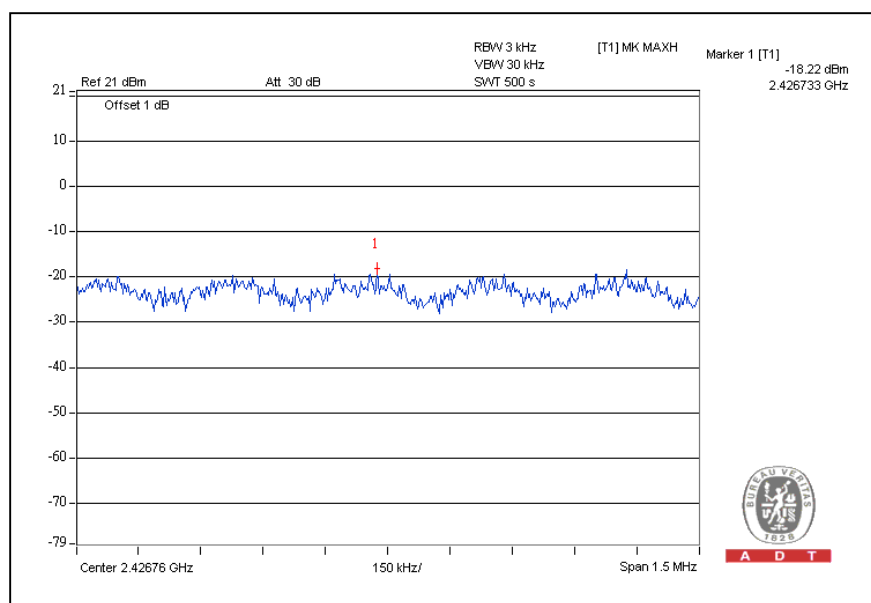



A D T

CH7

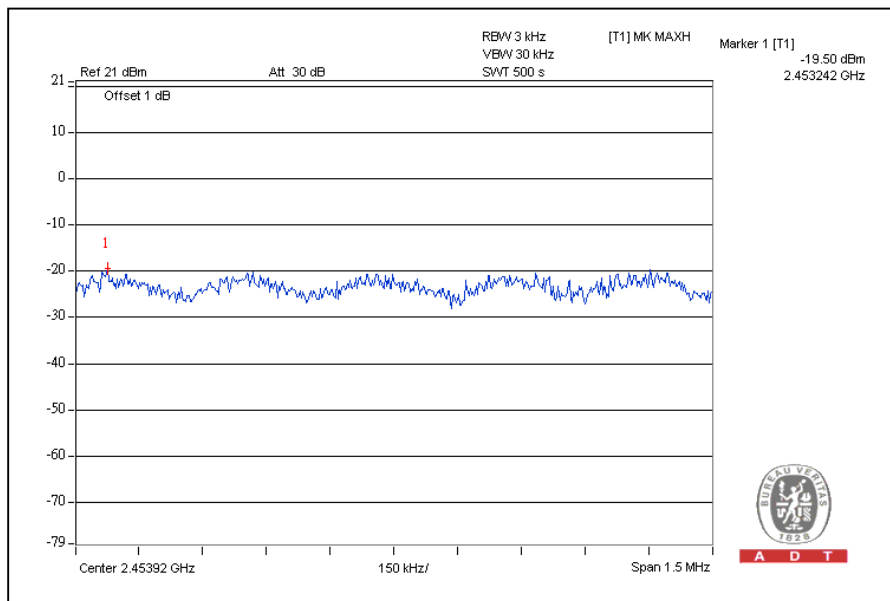

4.7 CONDUCTED EMISSION AND BAND EDGES MEASUREMENT

4.7.1 LIMITS OF CONDUCTED EMISSION AND BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 09, 2008	Dec. 08, 2009

NOTE:

1. The measurement uncertainty is less than $\pm 2.6\text{dB}$, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.7.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100kHz and 300kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (RBW = 100kHz and VBW = 300kHz) are attached on the following pages.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 EUT OPERATING CONDITION


Same as Item 4.2.6

4.7.6 TEST RESULTS


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS MODULATION:

CH1

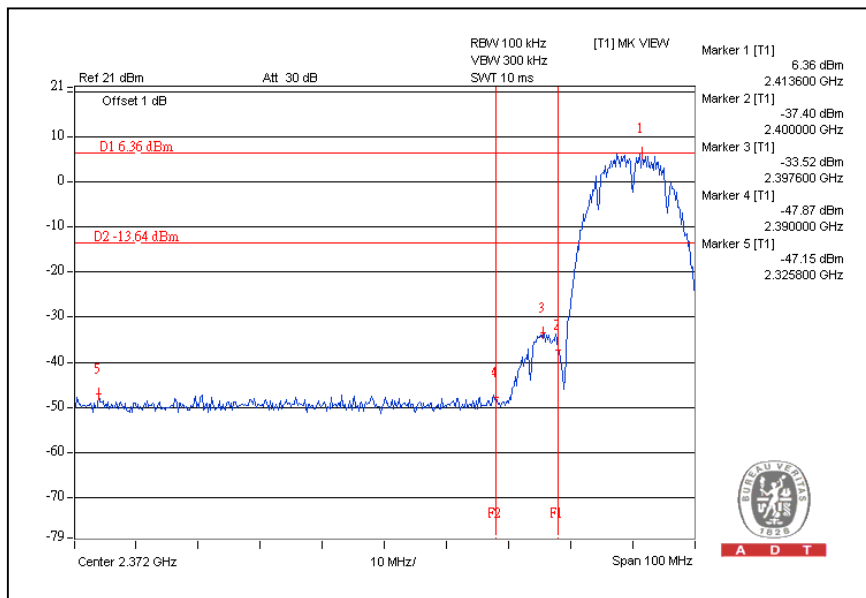


CH11

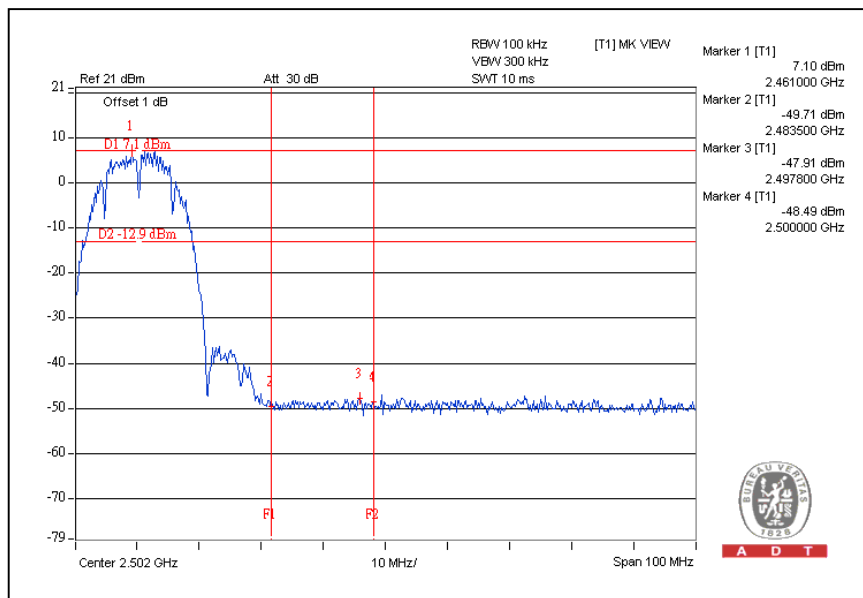




A D T

CH1

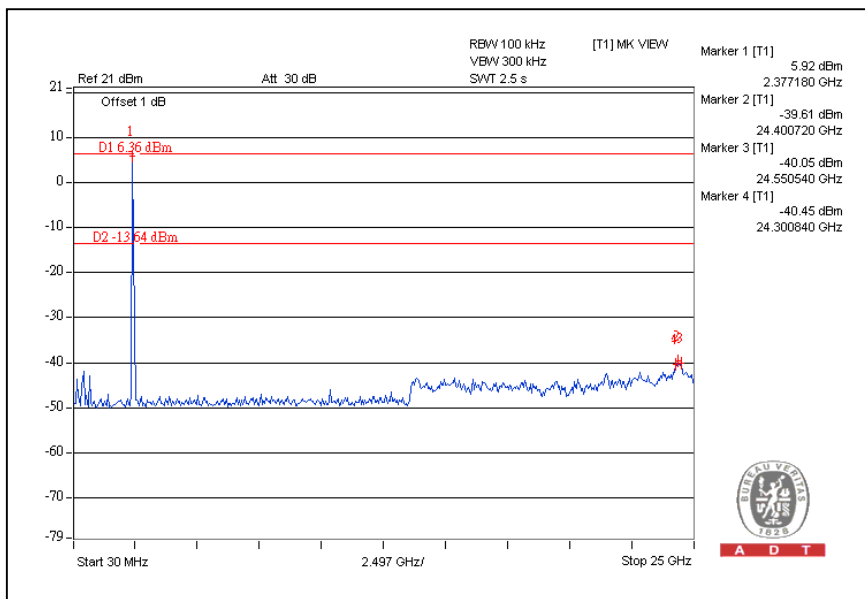

CH11

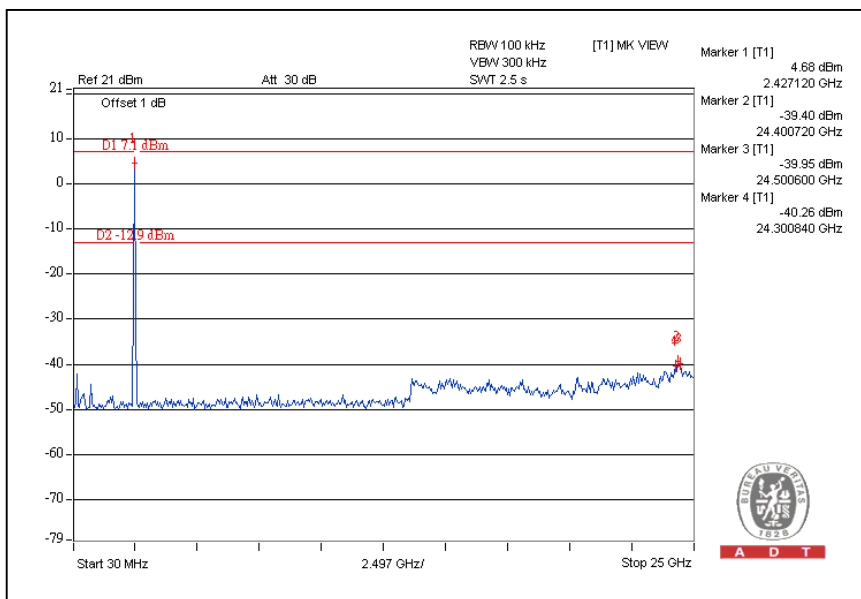





A D T

802.11g OFDM MODULATION:

CH 1

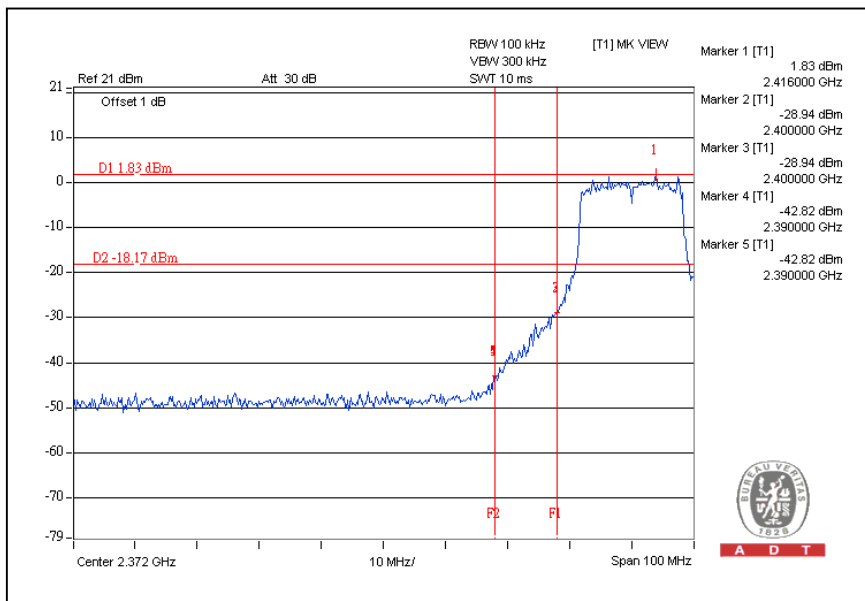


CH11

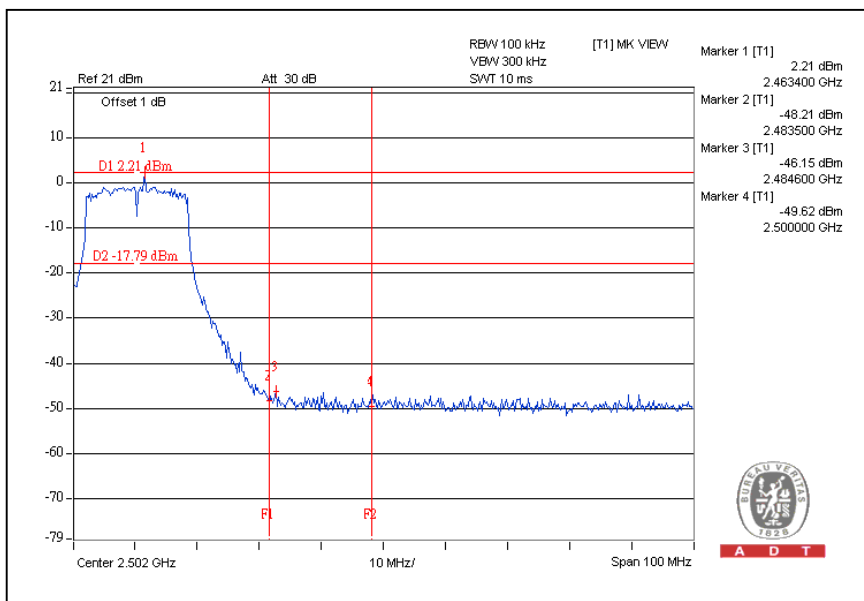




A D T

CH1

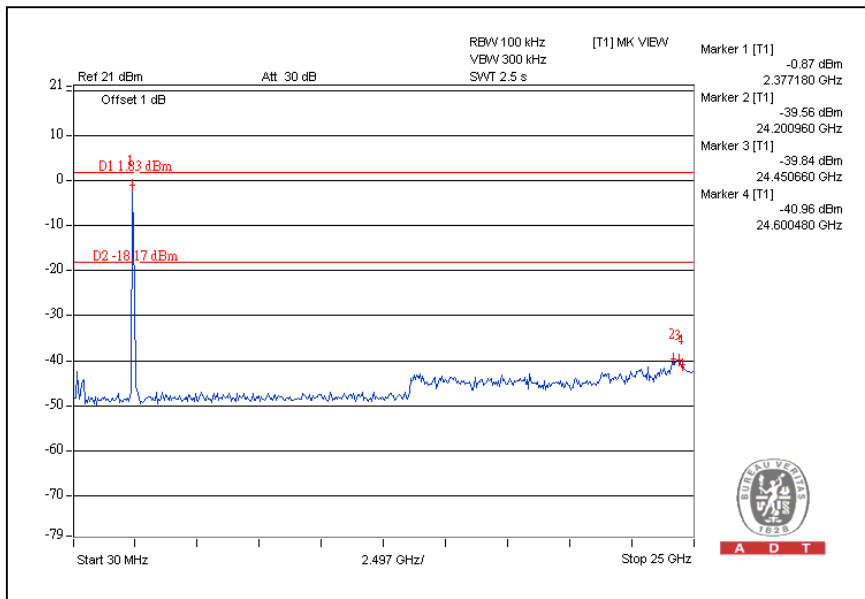


CH11

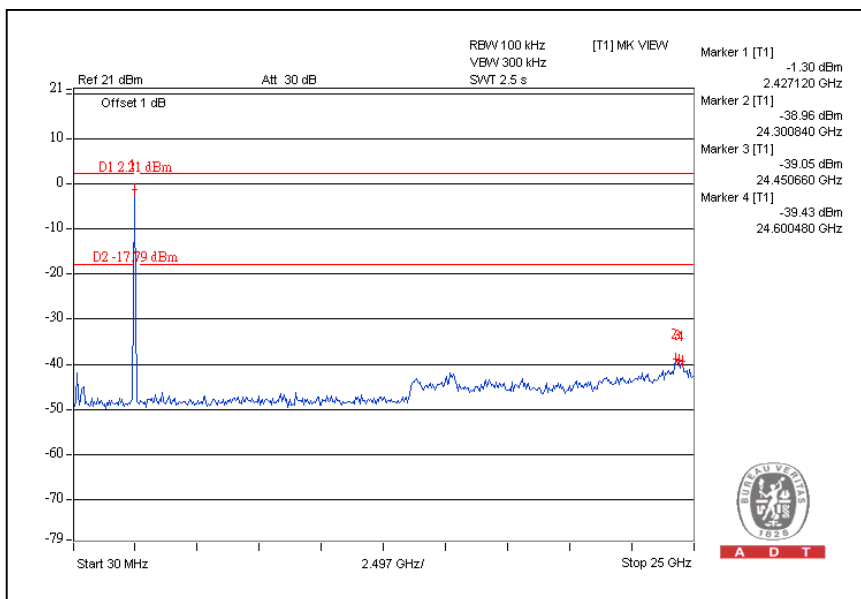




A D T

DRAFT 802.11n (20MHz) OFDM MODULATION: For Chain (0):CH1

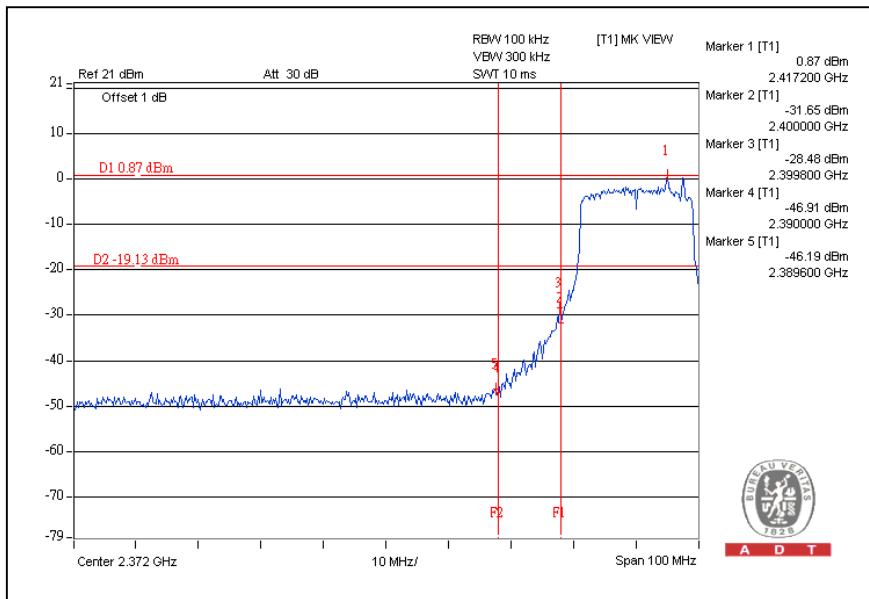


CH11

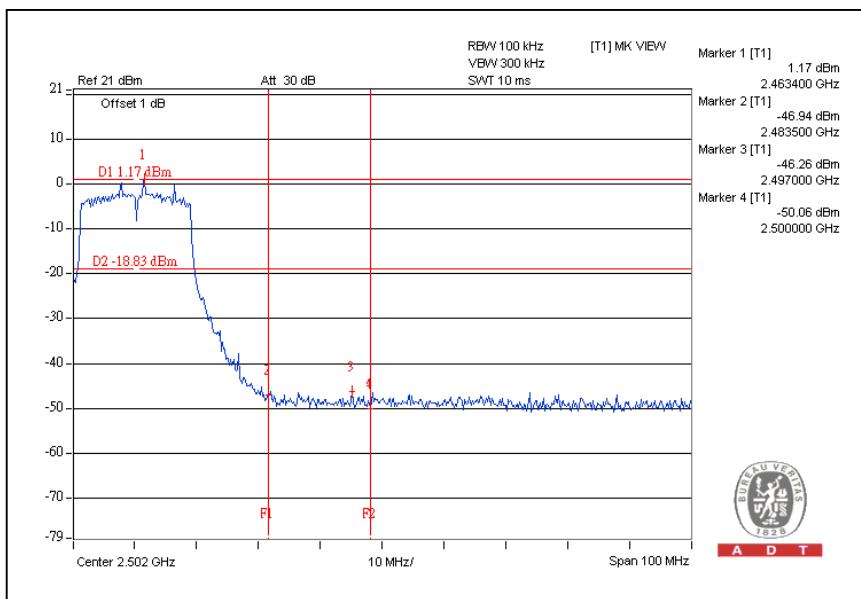




A D T


CH1

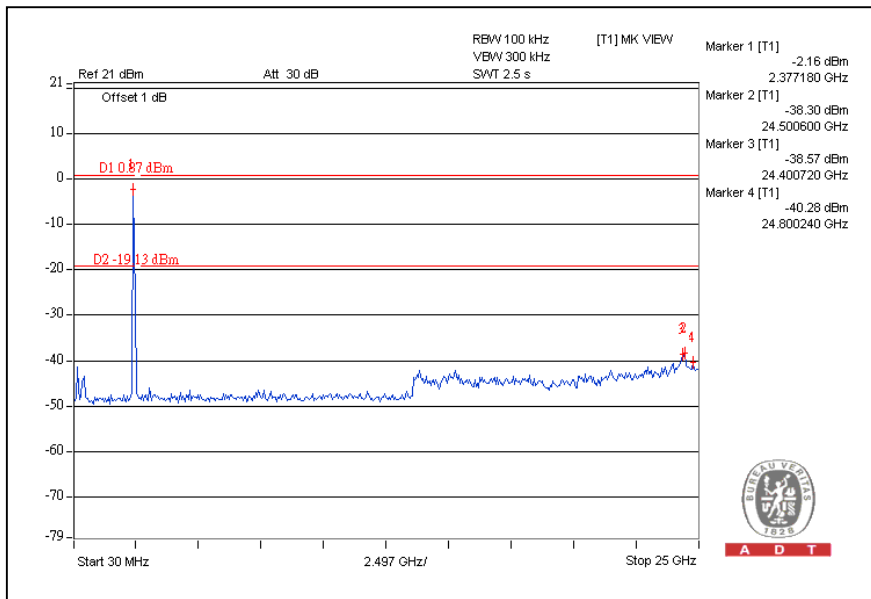


CH11

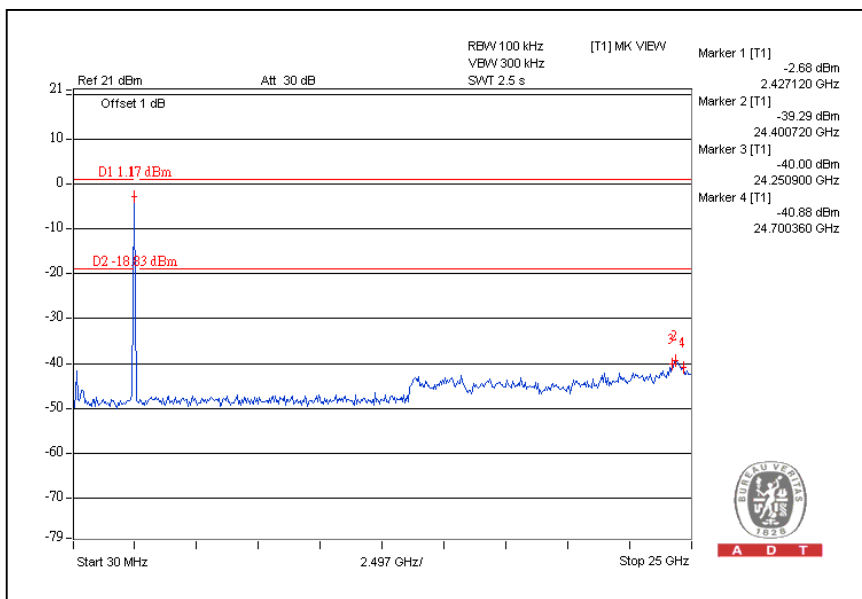

For Chain (1):CH1

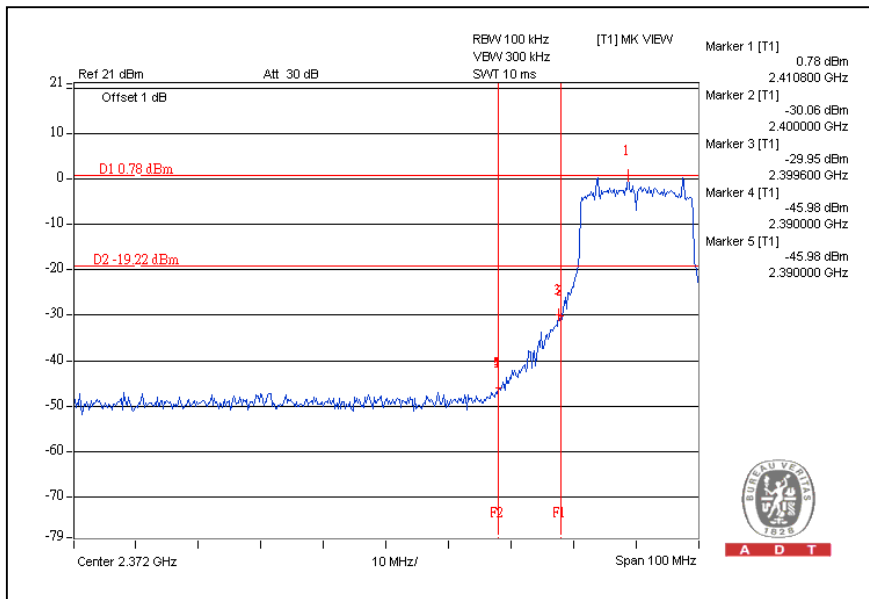


CH11

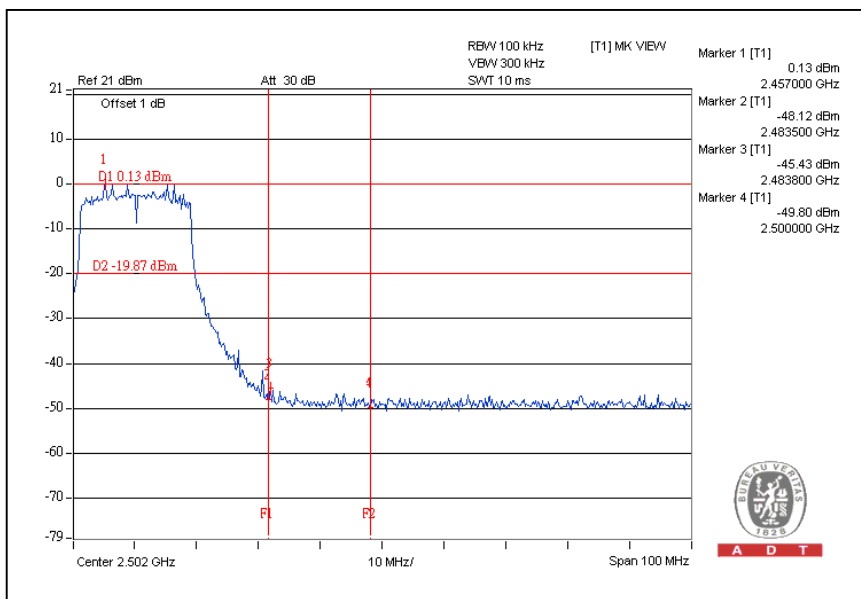




A D T

CH1

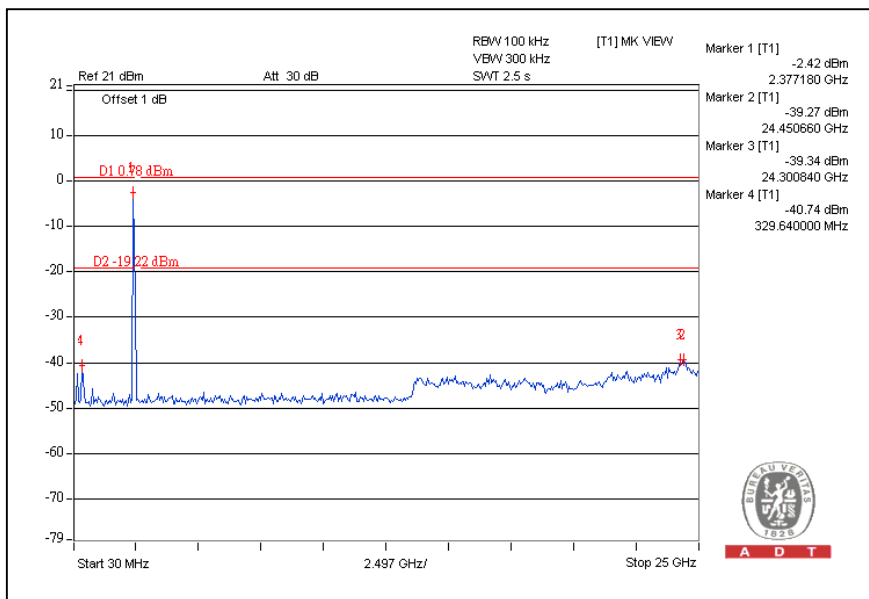


CH11

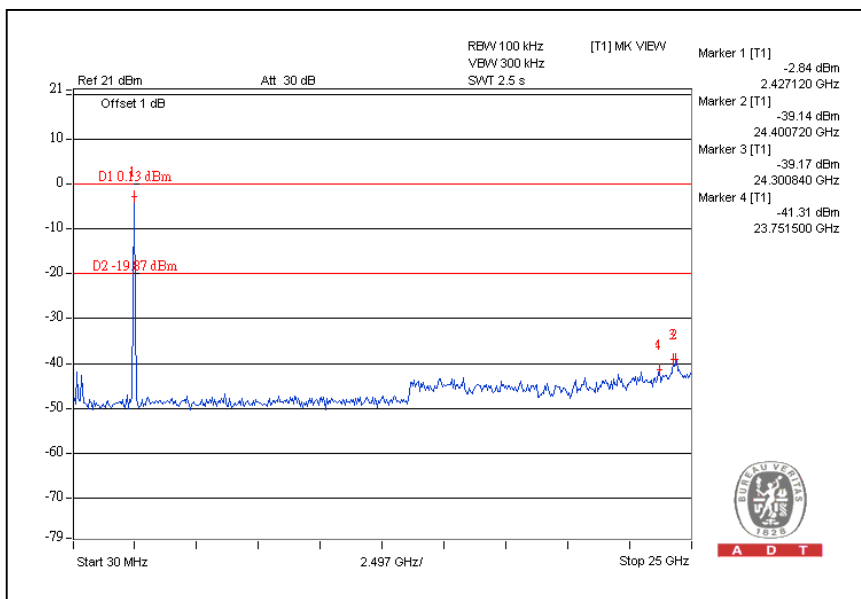




A D T


DRAFT 802.11n (40MHz) OFDM MODULATION: For Chain (0):CH1

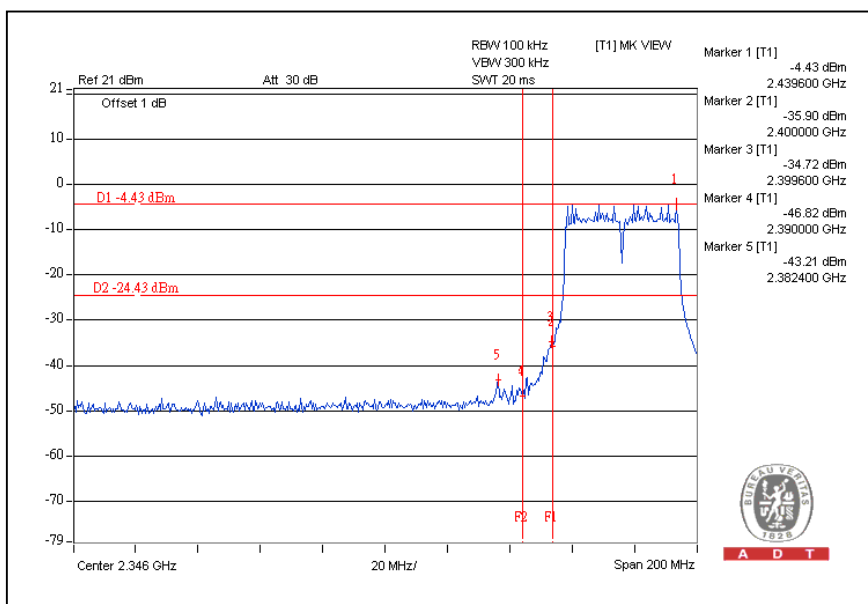


CH7

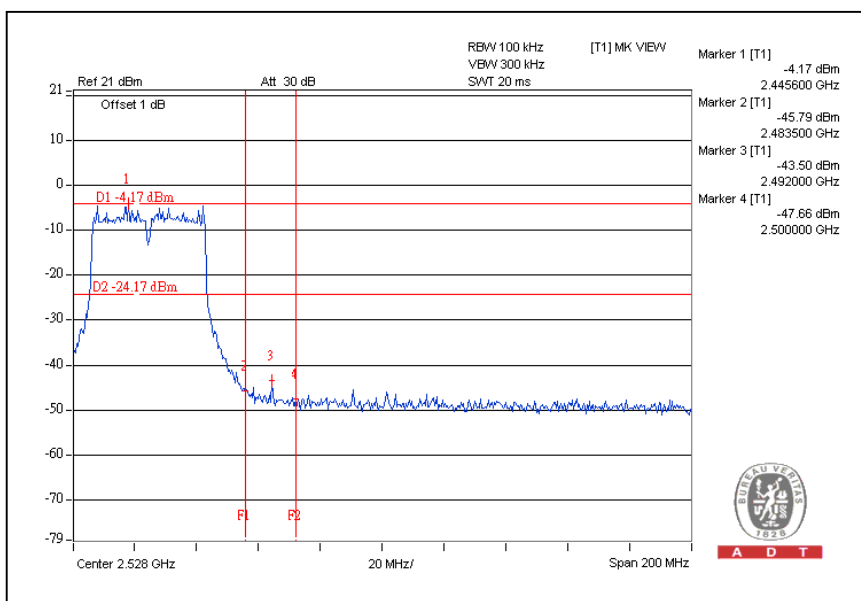


CH1

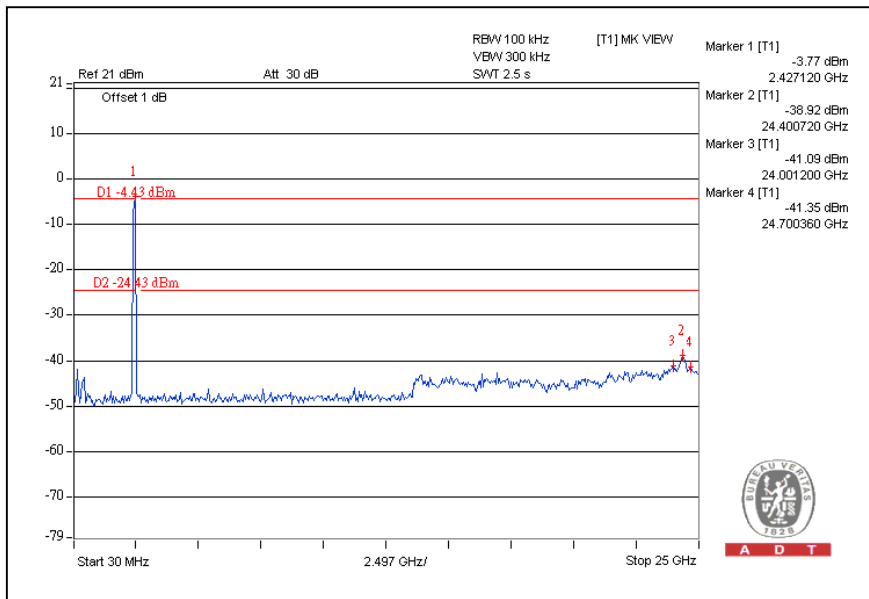


CH7

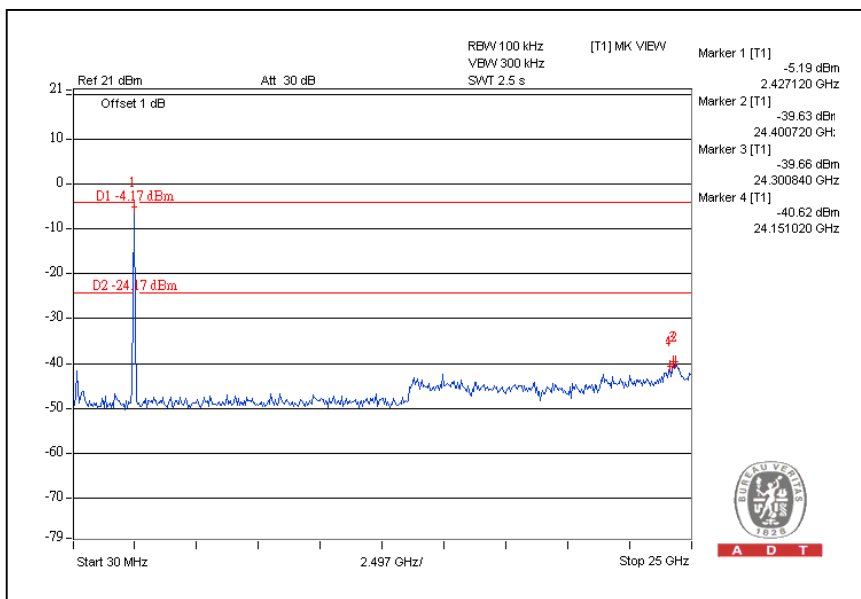

For Chain (1):CH1

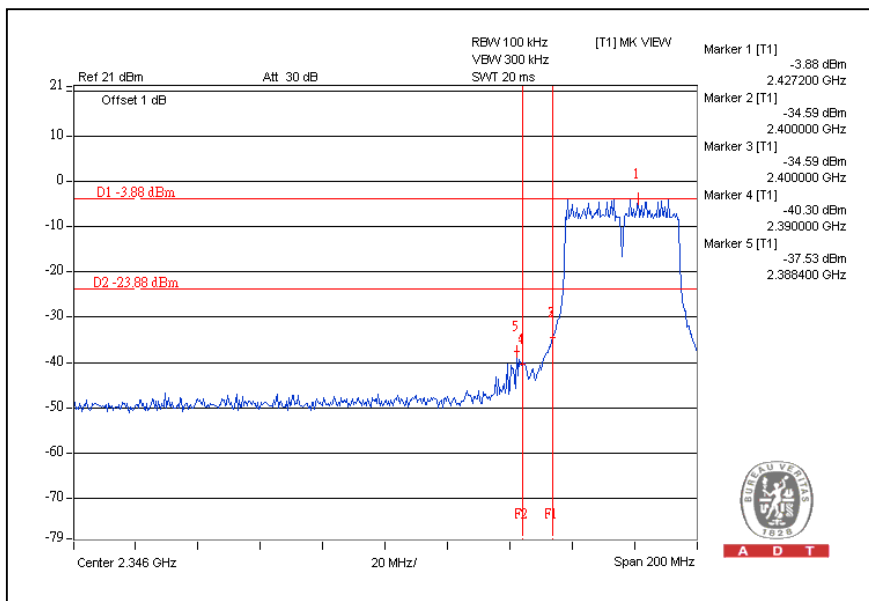


CH7

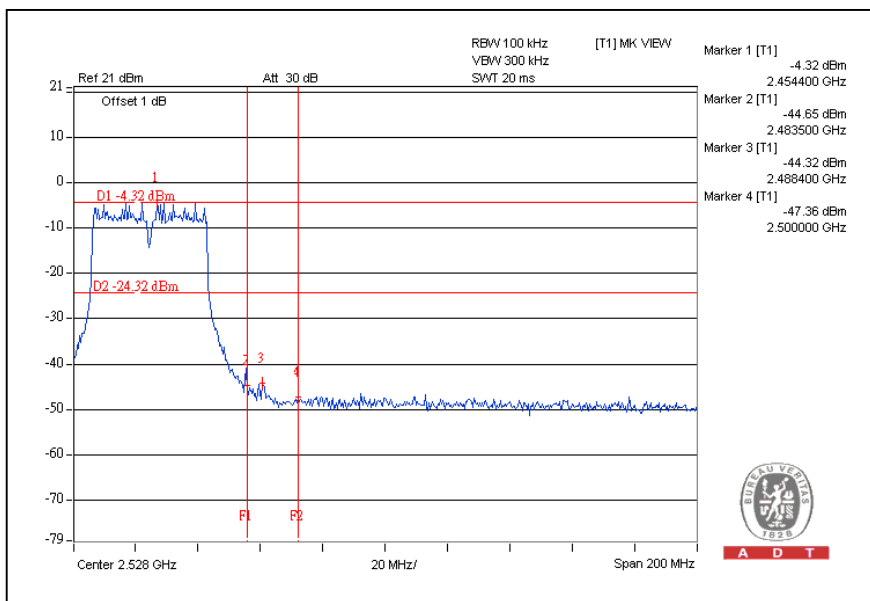




A D T

CH1

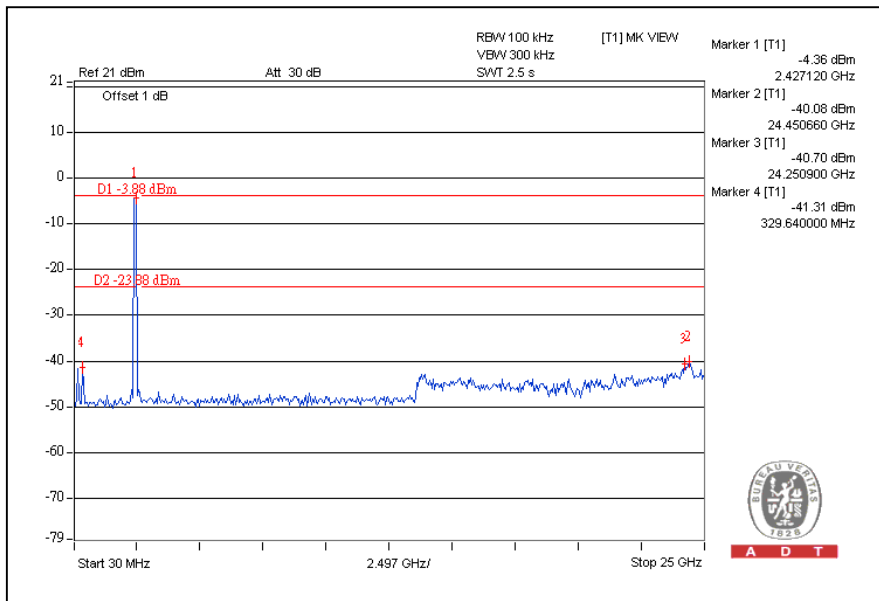

CH7

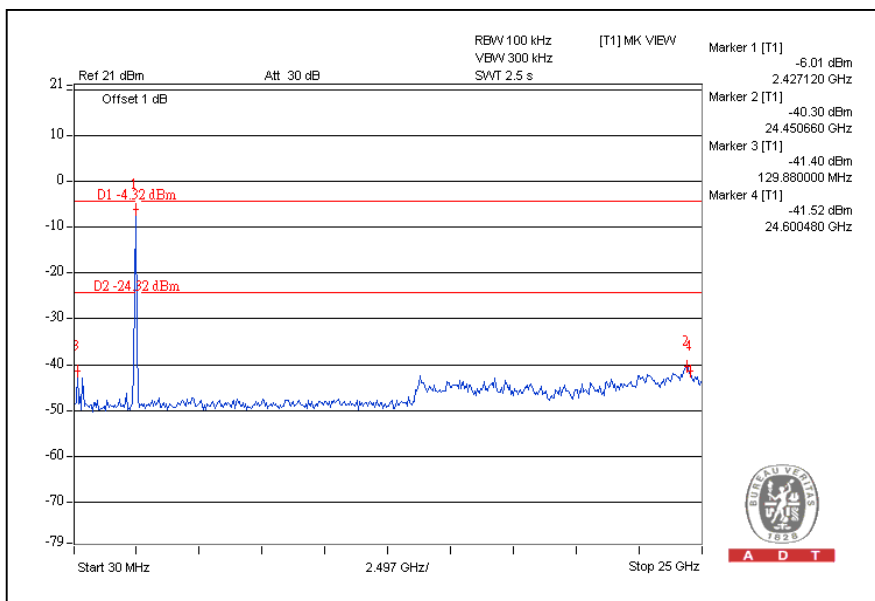

4.8 ANTENNA REQUIREMENT

4.8.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.8.2 ANTENNA CONNECTED CONSTRUCTION

There are two antennas provided to this EUT, please refer to the following table:

No.	Antenna Type	Gain (dBi)	Antenna Connector
1	Dipole	1.8	SMA Male Reverse
2	Dipole	1.8	SMA Male Reverse



A D T

5. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

6. APPENDIX - A MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---