


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	23°C	Humidity	62%
Test Engineer	Satoshi Yang	Configurations	2.4G + 5G
Test Mode	Mode 3		

Horizontal

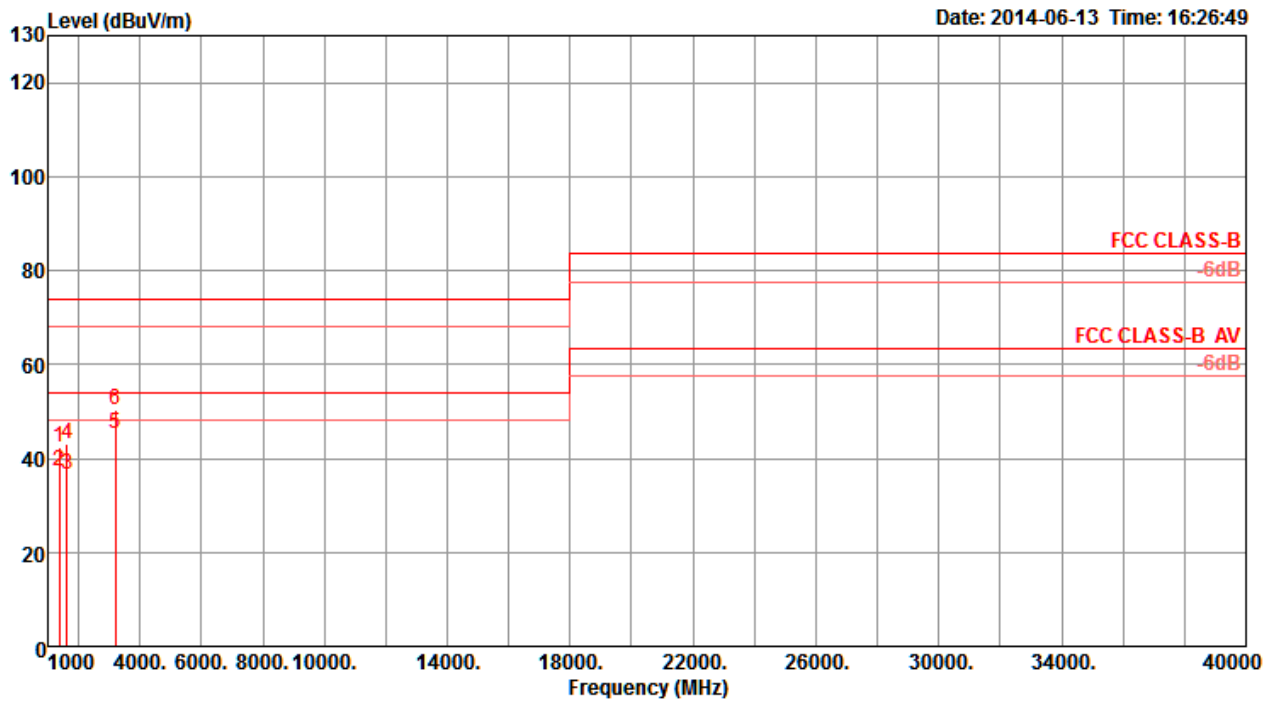

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	1375.00	42.44	74.00	-31.56	50.39	2.15	25.07	35.17	Peak	15	100	HORIZONTAL
2	1375.02	37.25	54.00	-16.75	45.20	2.15	25.07	35.17	Average	15	100	HORIZONTAL
3	1625.06	36.60	54.00	-17.40	42.81	2.36	26.27	34.84	Average	219	100	HORIZONTAL
4	1625.13	43.07	74.00	-30.93	49.28	2.36	26.27	34.84	Peak	219	100	HORIZONTAL
5	3187.47	45.25	54.00	-8.75	46.96	3.38	29.62	34.71	Average	332	227	HORIZONTAL
6	3187.49	50.39	74.00	-23.61	52.10	3.38	29.62	34.71	Peak	332	227	HORIZONTAL

Vertical

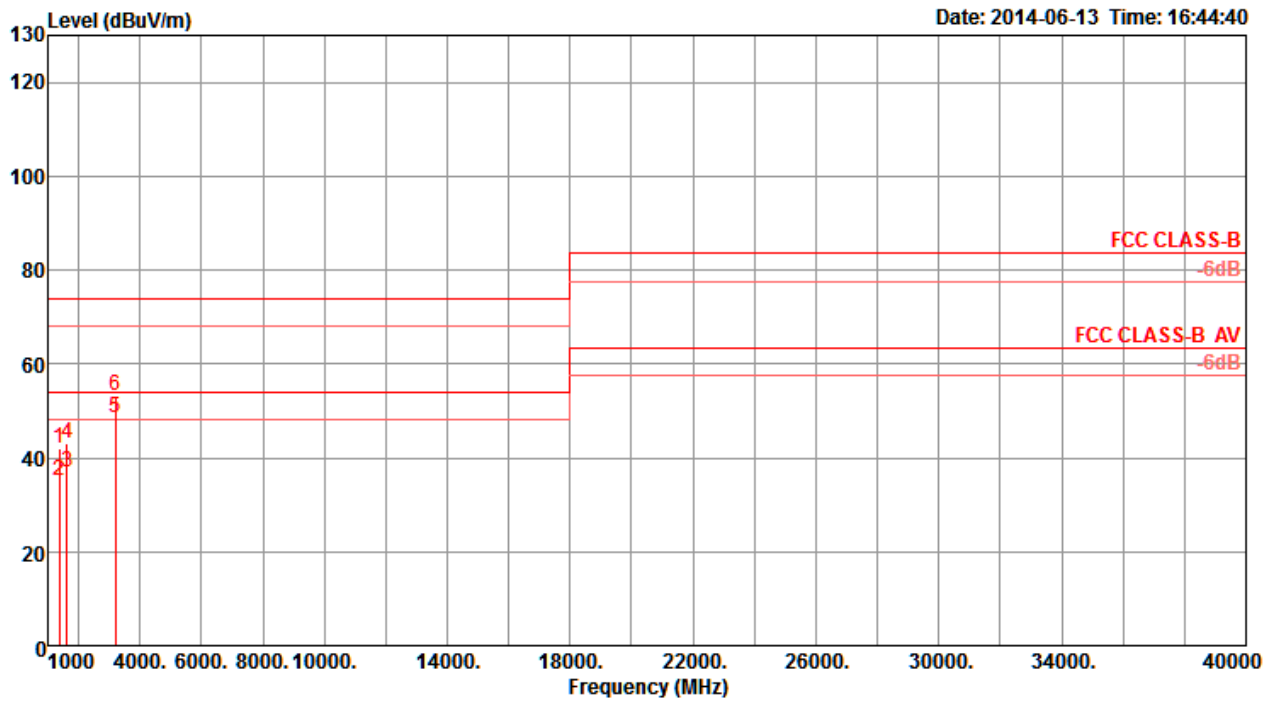

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	1374.97	41.93	74.00	-32.07	49.88	2.15	25.07	35.17	Peak	178	106	VERTICAL
2	1374.99	35.18	54.00	-18.82	43.13	2.15	25.07	35.17	Average	178	106	VERTICAL
3	1625.04	37.03	54.00	-16.97	43.24	2.36	26.27	34.84	Average	303	100	VERTICAL
4	1625.08	43.26	74.00	-30.74	49.47	2.36	26.27	34.84	Peak	303	100	VERTICAL
5	3187.48	48.41	54.00	-5.59	50.12	3.38	29.62	34.71	Average	13	100	VERTICAL
6	3187.57	53.34	74.00	-20.66	55.05	3.38	29.62	34.71	Peak	13	100	VERTICAL