



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Linksys LLC
Applicant Address	121 Theory Drive, Irvine, CA 92617, USA
FCC ID	Q87-E8350
Manufacturer's company	Linksys LLC
Manufacturer Address	121 Theory Drive, Irvine, CA 92617, USA

Product Name	Linksys Dual-Band Wireless-AC Router
Brand Name	Linksys
Model No.	E8350
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250MHz
Received Date	May 05, 2014
Final Test Date	Aug. 25, 2014
Submission Type	Class II Change
Operating Mode	Master

Statement

Test result included is for the IEEE 802.11n and IEEE 802.11 a/ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01, KDB662911 D01 v02r01, KDB644545 D01 v01r02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.





Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	6
3.5. Table for Class II Change	7
3.6. Table for Test Modes.....	7
3.7. Table for Testing Locations.....	8
3.8. Table for Supporting Units	8
3.9. Table for Parameters of Test Software Setting	9
3.10. EUT Operation during Test	9
3.11. Duty Cycle.....	10
3.12. Test Configurations	11
4. TEST RESULT	12
4.1. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	12
4.2. Maximum Conducted Output Power Measurement.....	15
4.3. Power Spectral Density Measurement	18
4.4. Radiated Emissions Measurement	22
4.5. Band Edge Emissions Measurement	25
4.6. Antenna Requirements	27
5. LIST OF MEASURING EQUIPMENTS	28
6. MEASUREMENT UNCERTAINTY.....	29
APPENDIX A. TEST PHOTOS	A1 ~ A2



History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR452068-02	Rev. 01	Initial issue of report	Dec. 29, 2014



1. CERTIFICATE OF COMPLIANCE

Product Name : Linksys Dual-Band Wireless-AC Router
Brand Name : Linksys
Model No. : E8350
Applicant : Linksys LLC
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on May 05, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in black ink that reads 'Sam Chen'. The signature is written in a cursive style and is positioned above a horizontal line.

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.2	15.407(a)	Maximum Conducted Output Power	Complies	11.95 dB
4.3	15.407(a)	Power Spectral Density	Complies	19.86 dB
4.4	15.407(b)	Radiated Emissions	Complies	11.13 dB
4.5	15.407(b)	Band Edge Emissions	Complies	1.22 dB
4.6	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11ac

Items	Description
Product Type	WLAN (4TX, 4RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	see the below table for IEEE 802.11ac
Data Modulation	For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11ac
Frequency Range	5150 ~ 5250MHz
Channel Number	4 for 20MHz bandwidth ; 2 for 40MHz bandwidth 1 for 80MHz bandwidth
Channel Band Width (99%)	802.11ac MCS0/Nss2 (VHT80): 75.52 MHz
Maximum Conducted Output Power	802.11ac MCS0/Nss2 (VHT80): 18.05 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
Beamforming Function	<input checked="" type="checkbox"/> With beamforming for 802.11n/ac in 5GHz.	<input type="checkbox"/> Without beamforming
Band 1 Information	<input checked="" type="checkbox"/> Point-to-multipoint	<input type="checkbox"/> Fixed point-to-point
	<input checked="" type="checkbox"/> Indoor	
	<input type="checkbox"/> Outdoor	

Antenna and Band width

Antenna	Four (TX)		
Band width Mode	20 MHz	40 MHz	80 MHz
IEEE 802.11ac	V	V	V

IEEE 11ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11ac (VHT20)	4	MCS 0-9/Nss1-4
802.11ac (VHT40)	4	MCS 0-9/Nss1-4
802.11ac (VHT80)	4	MCS 0-9/Nss1-4

Note 1: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 and VHT80.

Note 2: Modulation modes consist of below configuration:
HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

3.2. Accessories

Power	Brand	Model No.	Rating
Adapter 1 (Interchangeable plug)	APD	WA-36A12	Input: 100-240Vac, 50-60Hz, 0.9A Max. Output: 12Vdc, 3A
Adapter 2 (Fixed plug)	APD	WA-36A12U	Input: 100-240Vac, 50-60Hz, 0.9A Max. Output: 12Vdc, 3A
Adapter 3 (Fixed plug)	HK	HK-X142-A12	Input: 100-240Vac, 50/60Hz, 1.5A Output: 12Vdc, 0-3.5A (SET AT 3.0A)
Others			
Plug*1 (Only for Adapter 1)			

3.3. Table for Filed Antenna


Ant.	Brand	Model No.	Type	Connector	Antenna Cable		Remark
					Brand	Model No.	
1	GALTRONICS	02109140-05620-1	Dipole	Reversed-SMA	Whayu	C120-510440-A (SRF2014480)	2.4GHz/5GHz Ant.
2	GALTRONICS	02109140-05620-1	Dipole	Reversed-SMA	Whayu	C120-510439-A (SRF2014479)	2.4GHz/5GHz Ant.
3	GALTRONICS	02109140-05620-1	Dipole	Reversed-SMA	Whayu	C120-510442-A (SRF2014482)	2.4GHz/5GHz Ant.
4	GALTRONICS	02109140-05620-1	Dipole	Reversed-SMA	Whayu	C120-510441-A (SRF2014481)	5GHz Ant.

5GHz Band 1				
Ant.	Frequency	Gain (dBi)	Cable Loss (dB)	True Gain (dBi)
1	5180 MHz	2.15	1.5	0.65
	5190 MHz	2.15	1.5	0.65
	5200 MHz	2.26	1.5	0.76
	5210 MHz	2.26	1.5	0.76
	5230 MHz	2.26	1.5	0.76
	5240 MHz	2.26	1.5	0.76
2	5180 MHz	2.15	1.1	1.05
	5190 MHz	2.15	1.1	1.05
	5200 MHz	2.26	1.1	1.16
	5210 MHz	2.26	1.1	1.16
	5230 MHz	2.26	1.1	1.16
	5240 MHz	2.26	1.1	1.16
3	5180 MHz	2.15	1.3	0.85
	5190 MHz	2.15	1.3	0.85
	5200 MHz	2.26	1.3	0.96
	5210 MHz	2.26	1.3	0.96
	5230 MHz	2.26	1.3	0.96
	5240 MHz	2.26	1.3	0.96
4	5180 MHz	2.15	2.2	-0.05
	5190 MHz	2.15	2.2	-0.05
	5200 MHz	2.26	2.2	0.06
	5210 MHz	2.26	2.2	0.06
	5230 MHz	2.26	2.2	0.06
	5240 MHz	2.26	2.2	0.06

Note: The EUT has four antennas.

For 5GHz Band (4TX/4RX)

Chain 1, Chain 2, Chain 3 and Chain 4 could transmit/receive simultaneously.

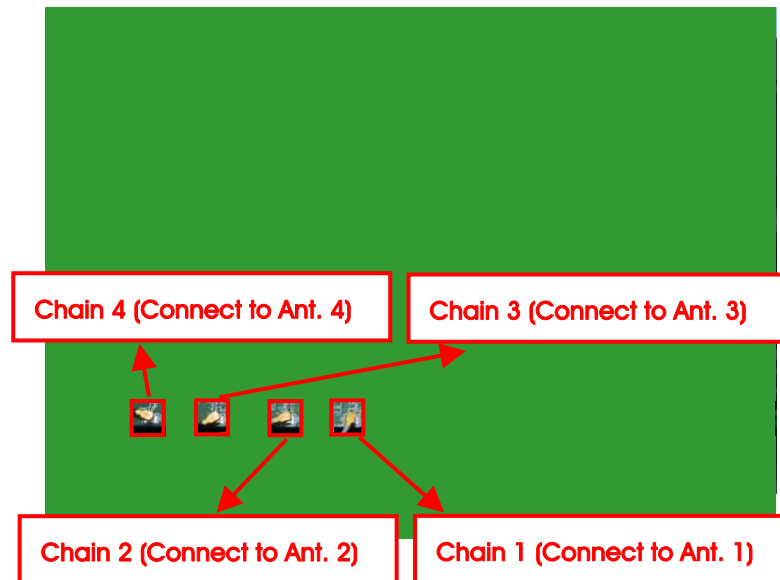

3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48.

For 40MHz bandwidth systems, use Channel 38, 46.

For 80MHz bandwidth systems, use Channel 42.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-

3.5. Table for Class II Change

This product is an extension of original report under Sporton project number: 452068

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
Add test mode: MCS0/Nss2 for beamforming mode 80MHz at 5GHz Band 1.	1. 26dB Bandwidth and 99% Occupied Bandwidth 2. Maximum Conducted Output Power 3. Power Spectral Density 4. Radiated Emissions <Above 1GHz> 5. Band Edge Emissions

Note: There is no change in hardware or in existing RF relevant portion

3.6. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Chain
Max. Conducted Output Power	11ac VHT80	Band 1	MCS0/Nss2	42	1+2+3+4
Power Spectral Density	11ac VHT80	Band 1	MCS0/Nss2	42	1+2+3+4
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement	11ac VHT80	Band 1	MCS0/Nss2	42	1+2+3+4
Radiated Emission Above 1GHz	11ac VHT80	Band 1	MCS0/Nss2	42	1+2+3+4
Band Edge Emission	11ac VHT80	Band 1	MCS0/Nss2	42	1+2+3+4

For Radiated Emission above 1GHz test:

Mode 1. Place EUT in X axis + Antenna in 90°

Mode 2. Place EUT in Y axis + Antenna in 90°

Mode 3. Place EUT in Y axis + Antenna in 0°

Mode 4. Place EUT in Z axis + Antenna in 90°

Mode 5. Place EUT in Z axis + Antenna in 0°

Mode 3 is the worst case, so it was selected to record in this test report.

3.7. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.8. Table for Supporting Units

For Test Site No: 03CH01-CB<Above 1GHz>

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC
NB	DELL	E6220	DoC
WiFi USB Adapter	NETGEAR	A6200	PY312200200

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC

3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11ac MCS0/Nss2 VHT80

Test Software Version	DOS
Frequency	5210 MHz
MCS0/Nss2 VHT80	11

3.10. EUT Operation during Test

For beamforming mode:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN XP were executed.


The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe" to link with the remote workstation to receive and transmit packet by WiFi USB Adapter and transmit duty cycle no less 98%

3.11. Duty Cycle

For beamforming mode:

IEEE 802.11ac MCS0/Nss2 VHT80

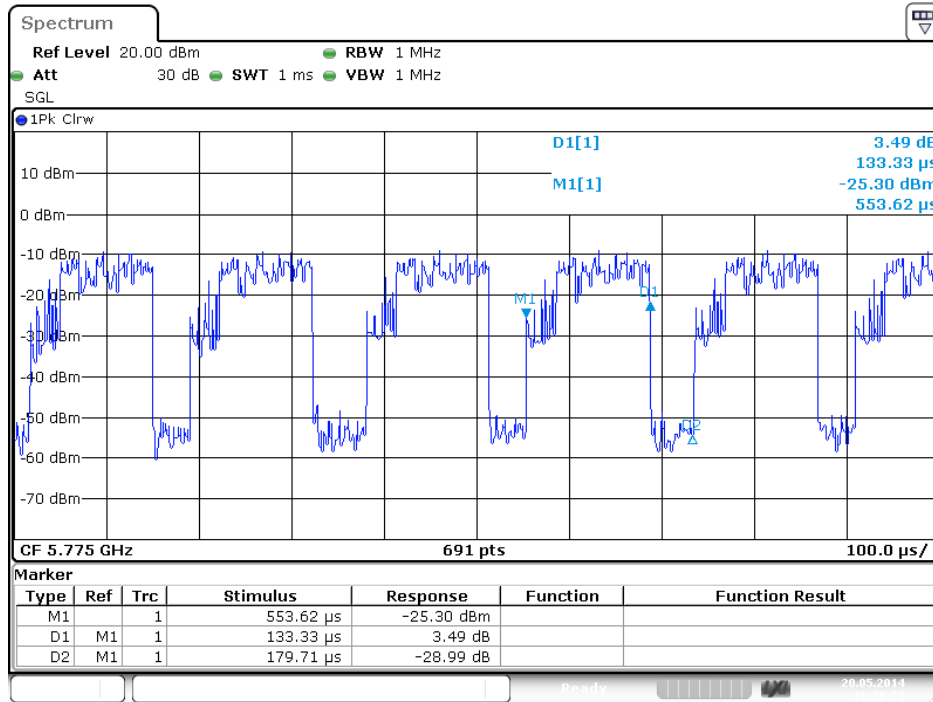


Date: 20.MAY.2014 16:20:24

3.12. Test Configurations

3.12.1. Radiation Emissions Test Configuration

Test Configuration: above 1GHz

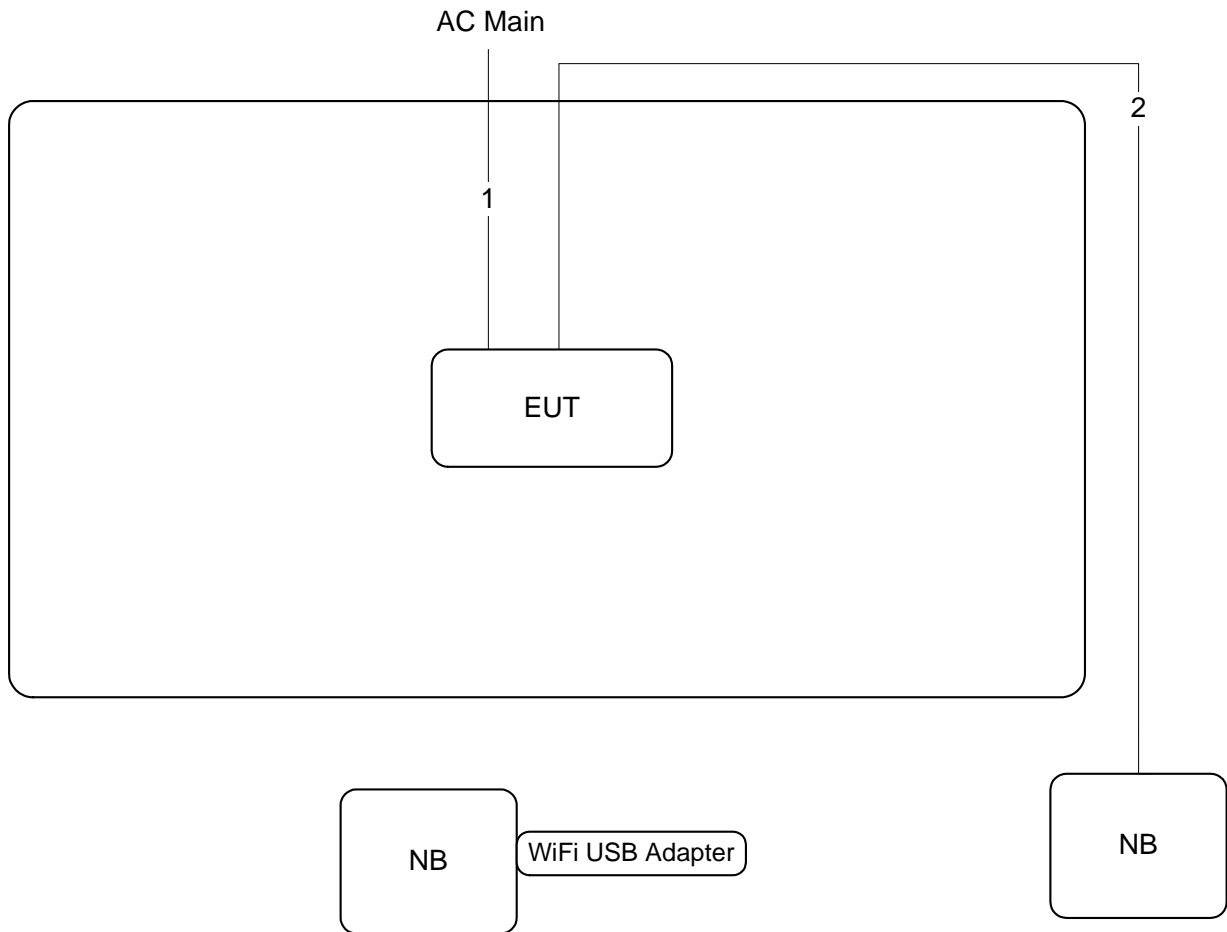

Item	Connection	Shielded	Length
1	AC power cable	No	1.6m
2	RJ-45 cable	No	10m

4. TEST RESULT

4.1. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

4.1.1. Limit

No restriction limits.

4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.1.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.1.4. Test Deviation

There is no deviation with the original standard.

4.1.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


4.1.6. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	26°C	Humidity	63%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac

Configuration IEEE 802.11ac MCS0/Nss2 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
42	5210 MHz	80.64	75.52

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

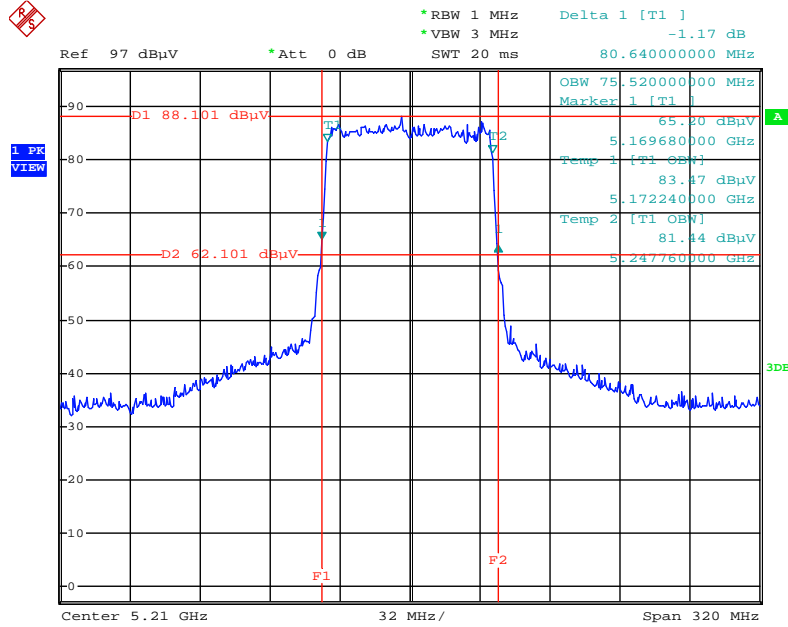

Date: 25.AUG.2014 15:47:15

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 000 kHz
VBW	3000 kHz
Detector	RMS
Trace	Average Sweep count 100
Sweep Time	Auto

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.2.4. Test Setup Layout



4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	26°C	Humidity	63%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac
Test Date	Aug. 25, 2014		

Configuration IEEE 802.11ac MCS0/Nss2 VHT80

Channel	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
42	5210 MHz	12.07	11.98	12.03	12.05	18.05	30.00	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{SS}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 3.76dBi < 6dBi$, So CH42 Limit = 30dBm

4.3. Power Spectral Density Measurement

4.3.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.2.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15~5.25 GHz	17

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

4.3.4. Test Setup Layout

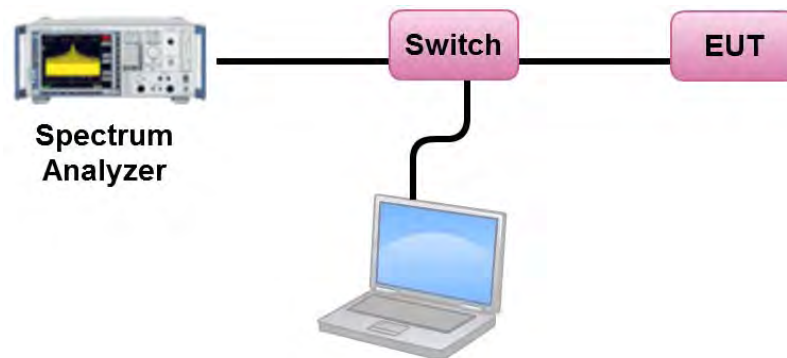

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	26°C	Humidity	63%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac
Test Date	Aug. 25, 2014		

Configuration IEEE 802.11ac MCS0/Nss2 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4


Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	-2.86	17.00	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{i=1}^{N_{ant}} \left[\sum_{j=1}^{N_{ant}} E_{i,j} \right]^2}{N_{ant}} \right] = 3.76dBi < 6dBi$, So CH42 Limit = 17dBm/MHz

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

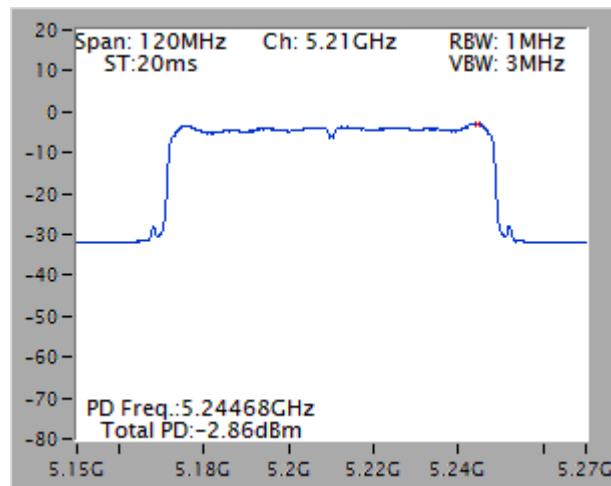

4.4. Radiated Emissions Measurement

4.4.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.4.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.4.4. Test Deviation

There is no deviation with the original standard.

4.4.5. EUT Operation during Test

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

4.4.6. Results for Radiated Emissions (1GHz~40GHz)

Temperature	23°C	Humidity	62%
Test Engineer	Satoshi Yang	Configurations	IEEE 802.11ac MCS0/Nss2 VHT80 CH 42 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Aug. 25, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10419.90	42.85	54.00	-11.15	29.74	8.55	39.84	35.28	Average	154	220	HORIZONTAL
2	10428.43	55.72	74.00	-18.28	42.55	8.55	39.88	35.26	Peak	154	220	HORIZONTAL
3	15622.34	42.84	54.00	-11.16	29.62	10.78	38.01	35.57	Average	146	168	HORIZONTAL
4	15637.37	56.36	74.00	-17.64	43.16	10.78	37.99	35.57	Peak	146	168	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10419.97	42.10	54.00	-11.90	28.99	8.55	39.84	35.28	Average	167	304	VERTICAL
2	10421.92	55.27	74.00	-18.73	42.16	8.55	39.84	35.28	Peak	167	304	VERTICAL
3	15633.11	42.87	54.00	-11.13	29.67	10.78	37.99	35.57	Average	154	14	VERTICAL
4	15634.17	55.31	74.00	-18.69	42.11	10.78	37.99	35.57	Peak	154	14	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5. Band Edge Emissions Measurement

4.5.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

4.5.3. Test Procedures

- The test procedure is the same as section 4.4.3, only the frequency range investigated is limited to 100MHz around bandedges.

4.5.4. Test Deviation

There is no deviation with the original standard.

4.5.5. EUT Operation during Test

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

4.5.6. Test Result of Band Edge and Fundamental Emissions

Temperature	23°C	Humidity	62%
Test Engineer	Satoshi Yang	Configurations	IEEE 802.11ac MCS0/Nss2 VHT80 CH 42 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Aug. 25, 2014		

Channel 42

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	5149.00	66.10	74.00	-7.90	63.15	4.34	33.14	34.53	Peak	319	110	VERTICAL
2	5150.00	52.78	54.00	-1.22	49.83	4.34	33.14	34.53	Average	319	110	VERTICAL
3	5187.00	94.79			91.77	4.36	33.19	34.53	Average	319	110	VERTICAL
4	5192.00	106.52			103.46	4.37	33.22	34.53	Peak	319	110	VERTICAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.6. Antenna Requirements

4.6.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.6.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Dec. 17, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Oct. 23, 2013	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100019	9kHz~40GHz	Dec. 02, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO 2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
Signal generator	R&S	SMU200A	102782	25MHz-6GHz	Nov. 15, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%