



FCC TEST REPORT (15.407)

REPORT NO.: RF120525E03-1

MODEL NO.: EA6500

FCC ID: Q87-EA6500

RECEIVED: May 25, 2012

TESTED: June 02 to 18, 2012

ISSUED: June 29, 2012

APPLICANT: Cisco Consumer Products LLC

ADDRESS: 121 Theory Drive Irvine, CA 92617(USA)

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



A D T

Table of Contents

RELEASE CONTROL RECORD	4
1. CERTIFICATION	5
2. SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	11
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	12
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	14
3.4 DUTY CYCLE OF TEST SIGNAL	15
3.5 DESCRIPTION OF SUPPORT UNITS	16
3.6 CONFIGURATION OF SYSTEM UNDER TEST	17
4. TEST TYPES AND RESULTS	18
4.1 CONDUCTED EMISSION MEASUREMENT	18
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	18
4.1.2 TEST INSTRUMENTS	18
4.1.3 TEST PROCEDURES	19
4.1.4 DEVIATION FROM TEST STANDARD	19
4.1.5 TEST SETUP	20
4.1.6 EUT OPERATING CONDITIONS	20
4.1.7 TEST RESULTS (MODE 1)	21
4.1.8 TEST RESULTS (MODE 2)	23
4.1.9 TEST RESULTS (MODE 3)	25
4.1.10 TEST RESULTS (MODE 4)	27
4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT	29
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	29
4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS	30
4.2.3 TEST INSTRUMENTS	31
4.2.4 TEST PROCEDURES	33
4.2.5 DEVIATION FROM TEST STANDARD	33
4.2.6 TEST SETUP	34
4.2.7 EUT OPERATING CONDITION	34
4.2.8 TEST RESULTS	35
4.3 TRANSMIT POWER MEASUREMENT	45
4.3.1 LIMITS OF TRANSMIT POWER MEASUREMENT	45
4.3.2 TEST INSTRUMENTS	45
4.3.3 TEST PROCEDURE	46
4.3.4 DEVIATION FROM TEST STANDARD	46



A D T

4.3.5	TEST SETUP	47
4.3.6	EUT OPERATING CONDITIONS	47
4.3.7	TEST RESULTS	48
4.4	PEAK POWER SPECTRAL DENSITY MEASUREMENT	50
4.4.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT	50
4.4.2	TEST INSTRUMENTS.....	50
4.4.3	TEST PROCEDURES	50
4.4.4	DEVIATION FROM TEST STANDARD	50
4.4.5	TEST SETUP	50
4.4.6	EUT OPERATING CONDITIONS	50
4.4.7	TEST RESULTS	51
4.5	PEAK POWER EXCURSION MEASUREMENT	53
4.5.1	LIMITS OF PEAK POWER EXCURSION MEASUREMENT	53
4.5.2	TEST INSTRUMENTS.....	53
4.5.3	TEST PROCEDURE.....	53
4.5.4	DEVIATION FROM TEST STANDARD	53
4.5.5	TEST SETUP	53
4.5.6	EUT OPERATING CONDITIONS	53
4.5.7	TEST RESULTS	54
4.6	FREQUENCY STABILITY.....	62
4.6.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	62
4.6.2	TEST INSTRUMENTS.....	62
4.6.3	TEST PROCEDURE.....	62
4.6.4	DEVIATION FROM TEST STANDARD	63
4.6.5	TEST SETUP	63
4.6.6	EUT OPERATING CONDITION.....	63
4.6.7	TEST RESULTS	64
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	65
6.	INFORMATION ON THE TESTING LABORATORIES	66
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	67



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF120525E03-1	Original release	June 29, 2012



1. CERTIFICATION

PRODUCT: Linksys EA6500 Dual-Band AC Router with Gigabit and 2xUSB
BRAND NAME: Cisco
MODEL NO.: EA6500
TEST SAMPLE: ENGINEERING SAMPLE
APPLICANT: Cisco Consumer Products LLC
TESTED: June 02 to 18, 2012
STANDARDS: **FCC Part 15, Subpart E (Section 15.407)**
ANSI C63.10-2009

The above equipment (Model: EA6500) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , **DATE:** June 29, 2012
(Elsie Hsu, Specialist)

APPROVED BY :  , **DATE:** June 29, 2012
(May Chen, Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

For 5GHz, 5150~5250MHz

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.407(b)(6)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -11.34dB at 0.17656MHz
15.407(b/1/2/3) (b)(6)	Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.5dB at 5098.60MHz.
15.407(a/1/2)	Peak Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit.
15.407(a/1/2)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

NOTE:

1. The EUT was operating in 2400 ~ 2483.5MHz, 5.15~5.25GHz and 5.725~5.850GHz frequencies band. This report was recorded the RF parameters including 5.15~5.25GHz. For the 2400 ~ 2483.5MHz and 5.725~5.850GHz RF parameters was recorded in another test report.



A D T

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.98 dB
Radiated emissions (30MHz-1GHz)	5.59 dB
Radiated emissions (1GHz -6GHz)	3.84 dB
Radiated emissions (6GHz -18GHz)	4.09 dB
Radiated emissions (18GHz -40GHz)	4.24 dB



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Linksys EA6500 Dual-Band AC Router with Gigabit and 2xUSB
MODEL NO.	EA6500
POWER SUPPLY	DC 12V from power adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode only.
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: up to 11Mbps 802.11a / g: up to 54Mbps 802.11n: up to 450Mbps 802.11ac: up to 1300Mbps
OPERATING FREQUENCY	For 15.407 802.11a/ac: 5.18 ~ 5.24GHz For 15.247 802.11b/g/n: 2.412 ~ 2.462GHz 802.11a/ac: 5.745 ~ 5.825GHz
NUMBER OF CHANNEL	For 15.407 4 for 802.11a, 802.11ac (BW20) 2 for 802.11ac (BW40) 1 for 802.11ac (BW80) For 15.247(2.4GHz) 11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz) For 15.247(5GHz) 5 for 802.11a, 802.11ac (BW20) 2 for 802.11ac (BW40) 1 for 802.11ac (BW80)

MAXIMUM OUTPUT POWER	<p>For 15.407</p> <p>802.11a: 18.131mW 802.11ac (BW20): 29.637mW 802.11ac (BW40): 33.342mW 802.11ac (BW80): 17.809mW</p> <p>For 15.247 (2.4GHz)</p> <p>802.11b: 413.029mW 802.11g: 423.261mW 802.11n (20MHz): 416.703mW 802.11n (40MHz): 73.250mW</p> <p>For 15.247 (5GHz)</p> <p>802.11a: 412.248mW 802.11ac (BW20): 429.335mW 802.11ac (BW40): 417.701mW 802.11ac (BW80): 415.723mW</p>
ANTENNA TYPE	Please see NOTE
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ASSOCIATED DEVICES	Adapter x 1

NOTE:

- The EUT must be supplied with a power adapter and following four different models could be chosen as following table:

No	Brand	Model No.	Spec.
1	Hon-Kwang	HK-X142-A12	Input: 100-240V, 1.5A, 50/60Hz Output: 12V, 3A DC output cable (Unshielded, 1.5m)
2	Solytech	CAD3612	Input: 100-240V, 1.5A, 50/60Hz Output: 12V, 3A DC output cable (Unshielded, 1.5m)
3	LEI	IU30-6120250-WP	Input: 100-240V, 0.8A, 50/60Hz Output: 12V, 2.5A DC output cable (Unshielded, 1.5m) *Interchangeable
4	Solytech	CAD3612L	Input: 100-240V, 1.5A, 50/60Hz Output: 12V, 3A DC output cable (Unshielded, 1.5m) *Interchangeable

From the above adapters were pre-tested in chamber, the worse case was found in **Adapter 1**. Therefore only the test data of the adapter was recorded in this report.

2. The antennas provided to the EUT, please refer to the following table:

For 2.4GHz				
Transmitter Circuit	Brand	Model	Antenna Type	Peak Gain (dBi)
Chain (0)	Galtronics	.02102142-05167-4	Dipole	2.88(V)
Chain (1)		02102142-05167-1	Dipole	2.65(V)
Chain (2)		02102142-04610-4	Dipole	3.84(H)
For 5GHz				
Chain (0)	Galtronics	02100073-05167-1	Dipole	4.53(V)
Chain (1)		02100073-05167-2	Dipole	4.98(V)
Chain (2)		02102073-04610-4	Dipole	4.10(H)

Note: According to the above antennas, there are three antennas will transmit simultaneously (one is Horizontal and the others are Vertical).

3. The EUT incorporates a MIMO function. Physically, the EUT provides three completed transmitters and three receivers.

MODULATION MODE	TX/RX FUNCTION
802.11b	3Tx/3Rx
802.11g	3Tx/3Rx
802.11a	3Tx/3Rx
802.11n (20MHz)	3Tx/3Rx
802.11n (40MHz)	3Tx/3Rx
802.11ac (BW20)	3Tx/3Rx
802.11ac(BW40)	3Tx/3Rx
802.11ac (BW80)	3Tx/3Rx

Note: The modulation and bandwidth are similar for 11n mode for 20MHz (40MHz) and 11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

- Radiated emission of the simultaneous operation (2.4G & 5G) has been evaluated and no non-compliance was found. The EUT is 3 * 3 spatial MIMO (3Tx & 3Rx) without beam forming function.
- Radiated emission of the simultaneous operation (2.4GHz & 5GHz) has been evaluated and no non-compliance was found.
- When the EUT operating in 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 23.
- When the EUT operating in 802.11ac, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 9.
- The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 5150MHz ~ 5250MHz bands:

Four channels are provided for 802.11a and 802.11ac (BW20):

CHANNEL	FREQUENCY
36	5180 MHz
40	5200 MHz
44	5220 MHz
48	5240 MHz

Two channels are provided for 802.11ac (BW40):

CHANNEL	FREQUENCY
38	5190 MHz
46	5230 MHz

One channel is provided for 802.11ac (BW80):

CHANNEL	FREQUENCY
42	5210 MHz



A D T

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	OB	
1	√	√	√	√	√	With Adapter 1
2	√	-	-	-	-	With Adapter 2
3	√	-	-	-	-	With Adapter 3
4	√	-	-	-	-	With Adapter 4

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz
RE ≥ 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement
OB: Conducted Out-Band Emission Measurement

NOTE: The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on X-plane..

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11ac (BW80)	42	42	OFDM	BPSK	97.5

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11ac (BW80)	42	42	OFDM	BPSK	97.5

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6
802.11ac (BW20)	36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11ac (BW40)	38 to 46	38, 46	OFDM	BPSK	13.5
802.11ac (BW80)	42	42	OFDM	BPSK	97.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6
802.11ac (BW20)	36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11ac (BW40)	38 to 46	38, 46	OFDM	BPSK	13.5
802.11ac (BW80)	42	42	OFDM	BPSK	97.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
PLC	26deg. C, 73%RH 26deg. C, 63%RH	120Vac, 60Hz	Jyunchun Lin
RE<1G	24deg. C, 76%RH	120Vac, 60Hz	Amos Chuang
RE ³ 1G	23deg. C, 64%RH	120Vac, 60Hz	Robert Cheng
APCM	25deg. C, 60%RH	120Vac, 60Hz	Rex Huang
OB	25deg. C, 60%RH	120Vac, 60Hz	Rex Huang

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

789033 D01 General UNII Test Procedures v01r01

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.


NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



A D T

3.4 DUTY CYCLE OF TEST SIGNAL

Test tool can set the EUT to transmit at > 98 % duty cycle.

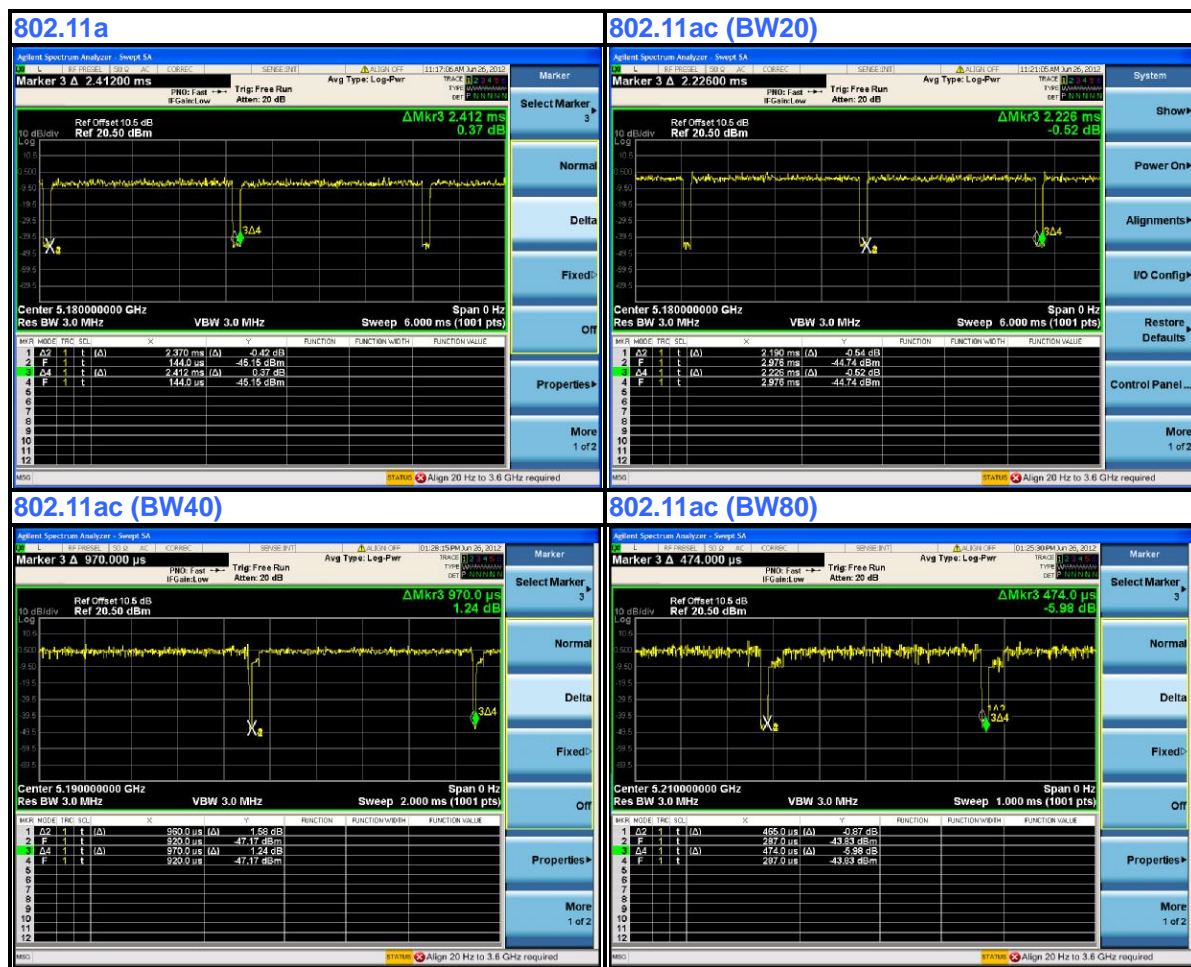



A D T

3.5 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP32LA	FSLB32S	FCC DoC
2	NOTEBOOK COMPUTER	DELL	PP32LA	GSLB32S	FCC DoC
3	iPod	Apple	MC749TA/A	CC4DMFJUDFDM	NA
	iPod	Apple	MC749TA/A	CC4DN25WDFD M	NA
4	HUB	ZyXEL	ES-116P	S060H02000215	FCC DoC

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	UTP Cable (10m)
2	UTP Cable (10m)
3	i-Pod cable (0.1m)
4	UTP Cable (10m)

NOTE: All power cords of the above support units are non shielded (1.8m).

3.6 CONFIGURATION OF SYSTEM UNDER TEST

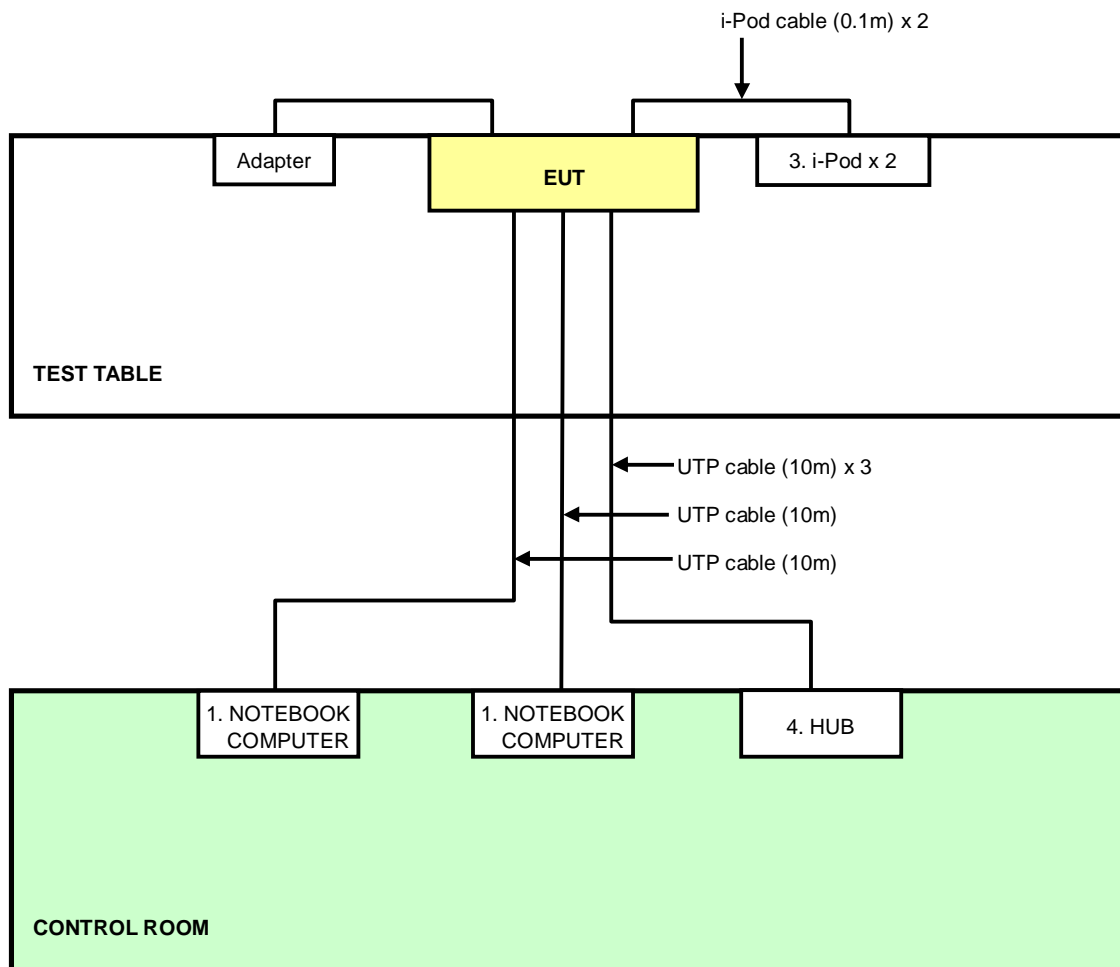



4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Mar. 08, 2012	Mar. 07, 2013
Line-Impedance Stabilization Network (for EUT)	NSLK8127	8127-522	Sep. 07, 2011	Sep. 06, 2012
Line-Impedance Stabilization Network (for Peripheral)	ESH3-Z5	848773/004	Nov. 02, 2011	Nov. 01, 2012
RF Cable (JYEBAO)	5DFB	COCCAB-001	Aug. 29, 2011	Aug. 28, 2012
50 ohms Terminator	50	3	Nov. 02, 2011	Nov. 01, 2012
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: June 13 to 18, 2012



A D T


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- b. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission level under (Limit – 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

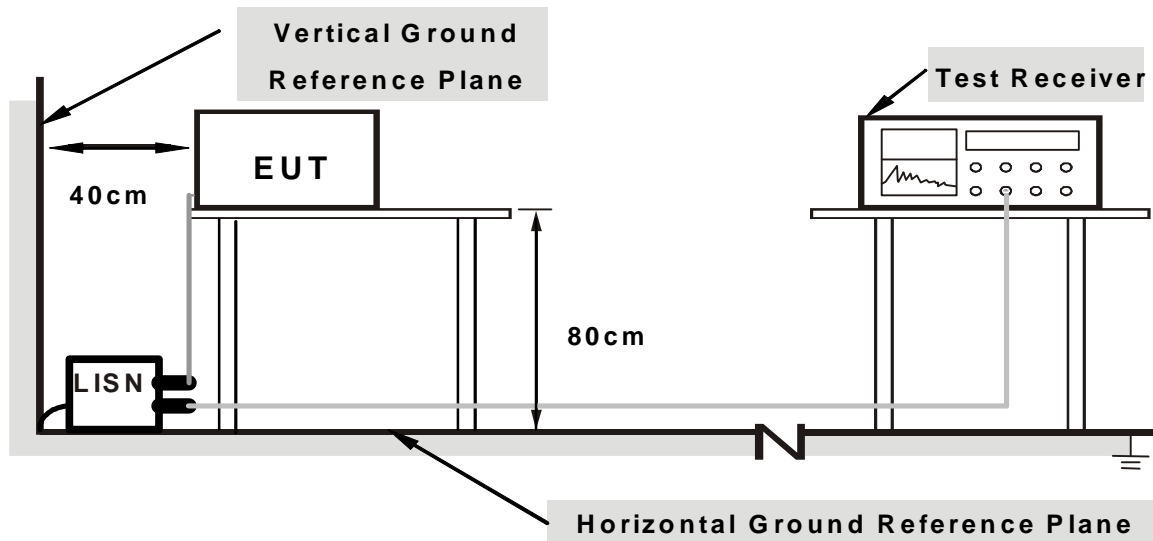

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

1. Placed the EUT on testing table.
2. Prepared other computer system (support unit 1) to act as communication partners and placed them outside of testing area.
3. The communication partners ran test program “art2_ver2_25BIN” to enable EUT under transmission/receiving condition continuously via one UTP cable transmission.


4.1.7 TEST RESULTS (MODE 1)

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
--------------	----------	----------------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.15000	0.07	42.72	32.96	42.79	33.03	66.00	56.00	-23.21
2	0.70078	0.13	39.70	29.41	39.83	29.54	56.00	46.00	-16.17	-16.46
3	0.97813	0.15	33.39	22.63	33.54	22.78	56.00	46.00	-22.46	-23.22
4	1.51953	0.21	31.15	19.48	31.36	19.69	56.00	46.00	-24.64	-26.31
5	3.29688	0.35	28.98	21.24	29.33	21.59	56.00	46.00	-26.67	-24.41
6	12.64844	0.83	29.38	24.00	30.21	24.83	60.00	50.00	-29.79	-25.17

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

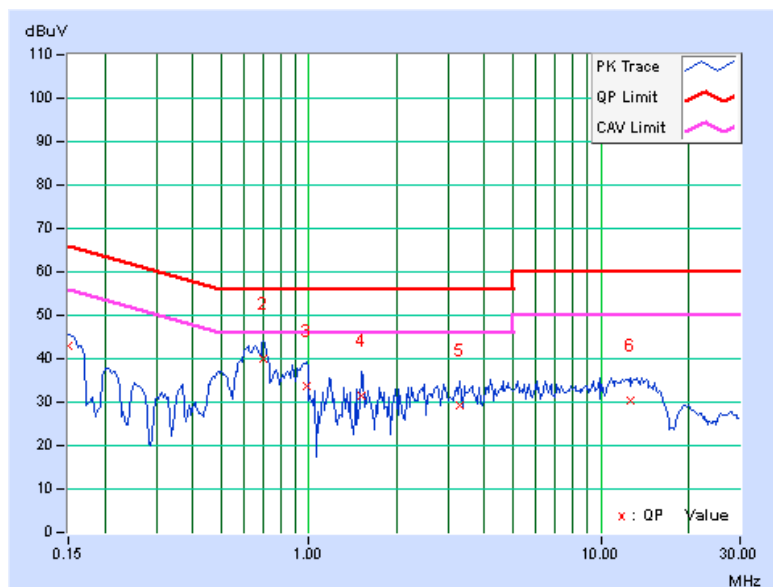


PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
--------------	-------------	----------------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.15425	0.06	44.49	36.89	44.55	36.95	65.77	55.77	-21.22
2	0.69688	0.10	40.48	28.68	40.58	28.78	56.00	46.00	-15.42	-17.22
3	0.95469	0.11	35.71	25.28	35.82	25.39	56.00	46.00	-20.18	-20.61
4	1.39844	0.14	34.64	26.41	34.78	26.55	56.00	46.00	-21.22	-19.45
5	2.40625	0.21	33.57	26.47	33.78	26.68	56.00	46.00	-22.22	-19.32
6	9.69922	0.56	31.76	26.81	32.32	27.37	60.00	50.00	-27.68	-22.63

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

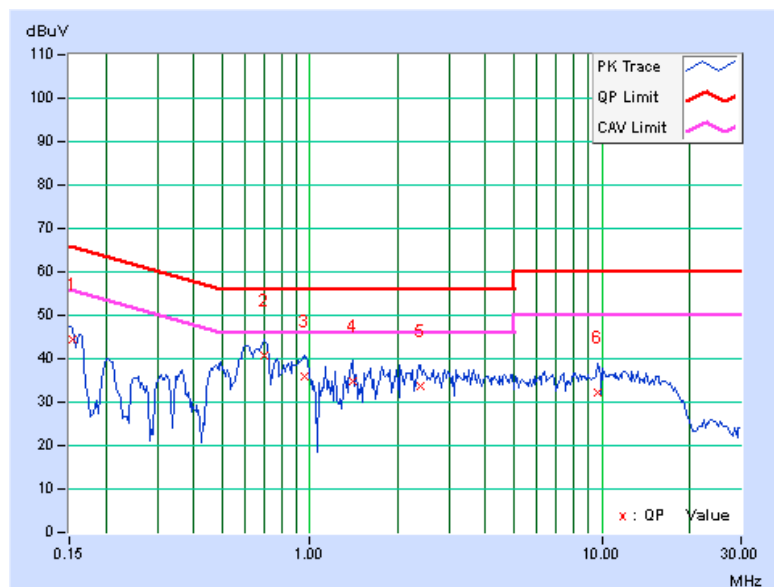


4.1.8 TEST RESULTS (MODE 2)

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
-------	----------	---------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.17656	0.08	49.41	43.23	49.49	43.31	64.65	54.65	-15.16
2	0.54584	0.12	41.64	33.37	41.76	33.49	56.00	46.00	-14.24	-12.51
3	0.97319	0.15	36.94	26.18	37.09	26.33	56.00	46.00	-18.91	-19.67
4	1.63672	0.23	35.41	24.91	35.64	25.14	56.00	46.00	-20.36	-20.86
5	2.66797	0.31	34.06	24.16	34.37	24.47	56.00	46.00	-21.63	-21.53
6	6.67969	0.53	38.90	32.18	39.43	32.71	60.00	50.00	-20.57	-17.29

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

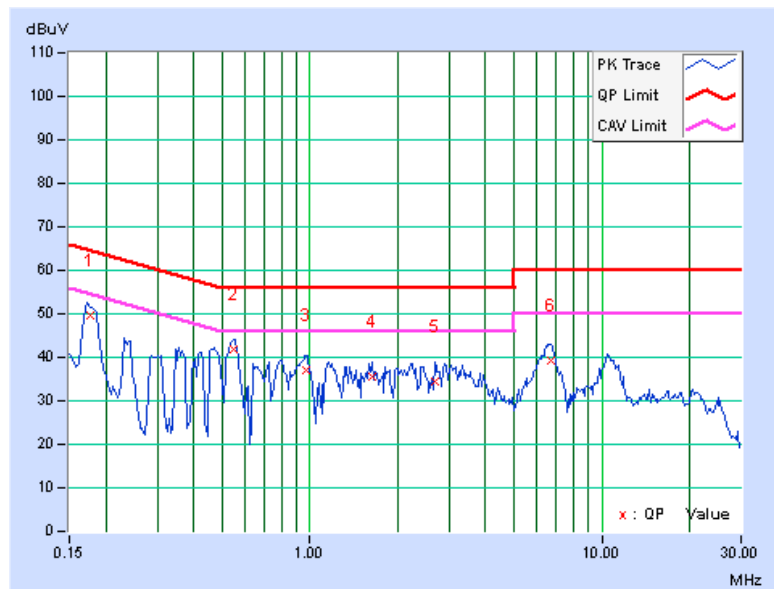


PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
--------------	-------------	----------------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.17344	0.06	49.43	39.80	49.49	39.86	64.79	54.79	-15.30
2	0.54259	0.10	39.85	32.94	39.95	33.04	56.00	46.00	-16.05	-12.96
3	0.97603	0.11	32.79	20.67	32.90	20.78	56.00	46.00	-23.10	-25.22
4	1.80469	0.17	31.42	19.06	31.59	19.23	56.00	46.00	-24.41	-26.77
5	4.65625	0.34	31.02	22.30	31.36	22.64	56.00	46.00	-24.64	-23.36
6	10.89453	0.62	31.14	24.27	31.76	24.89	60.00	50.00	-28.24	-25.11

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

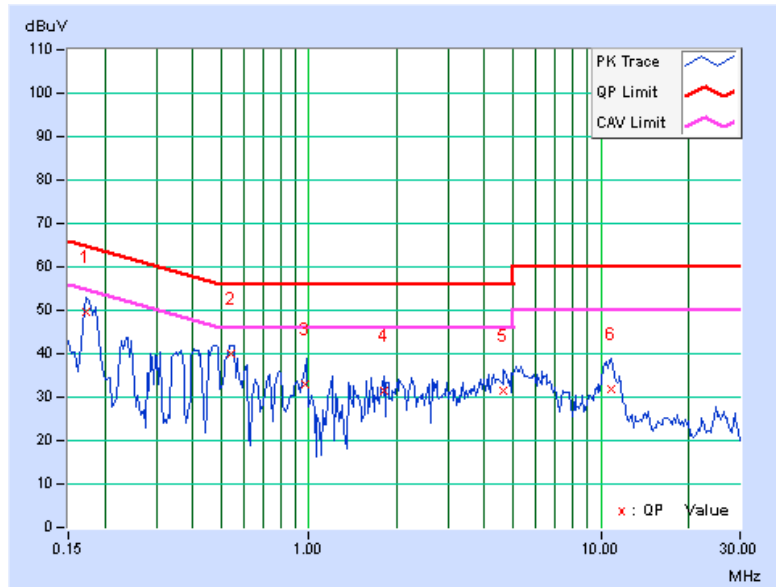



A D T


4.1.9 TEST RESULTS (MODE 3)

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
-------	----------	---------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.19297	0.08	49.53	38.10	49.61	38.18	63.91	53.91	-14.30
2	0.50938	0.12	42.03	27.84	42.15	27.96	56.00	46.00	-13.85	-18.04
3	0.71641	0.13	42.19	25.76	42.32	25.89	56.00	46.00	-13.68	-20.11
4	1.42578	0.20	39.00	24.04	39.20	24.24	56.00	46.00	-16.80	-21.76
5	2.25391	0.29	39.53	26.30	39.82	26.59	56.00	46.00	-16.18	-19.41
6	3.67188	0.38	39.63	26.86	40.01	27.24	56.00	46.00	-15.99	-18.76

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

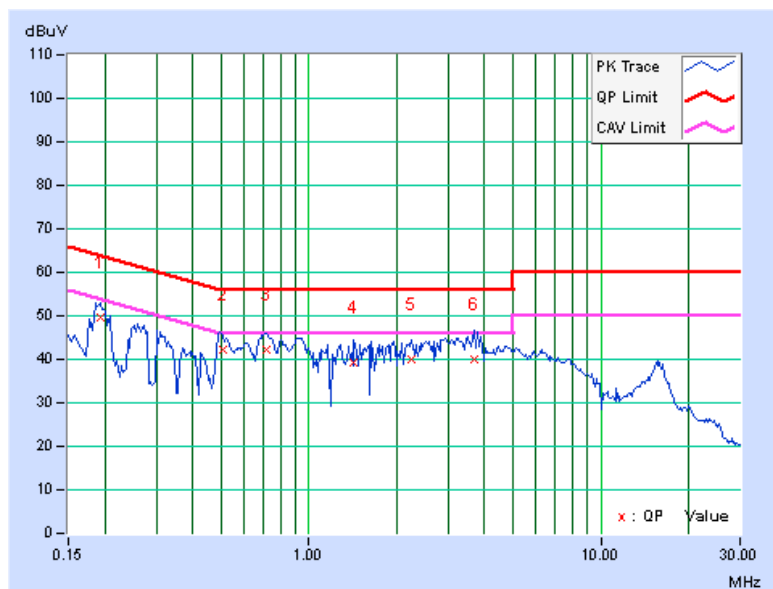


PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
--------------	-------------	----------------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.18975	0.07	48.66	38.26	48.73	38.33	64.05	54.05	-15.32
2	0.50000	0.10	42.55	29.08	42.65	29.18	56.00	46.00	-13.35	-16.82
3	0.71250	0.11	42.79	26.41	42.90	26.52	56.00	46.00	-13.10	-19.48
4	0.95469	0.11	40.80	24.36	40.91	24.47	56.00	46.00	-15.09	-21.53
5	1.79688	0.17	38.92	23.92	39.09	24.09	56.00	46.00	-16.91	-21.91
6	3.49609	0.28	39.68	27.05	39.96	27.33	56.00	46.00	-16.04	-18.67

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

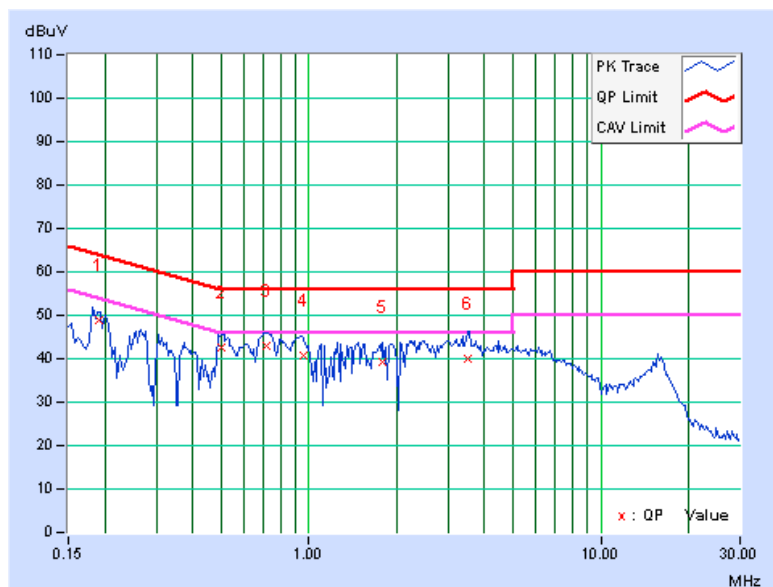


4.1.10 TEST RESULTS (MODE 4)

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
-------	----------	---------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.16953	0.07	50.39	43.50	50.46	43.57	64.98	54.98	-14.52
2	0.56016	0.12	36.47	30.26	36.59	30.38	56.00	46.00	-19.41	-15.62
3	1.21484	0.18	31.95	22.93	32.13	23.11	56.00	46.00	-23.87	-22.89
4	2.74609	0.32	29.09	22.43	29.41	22.75	56.00	46.00	-26.59	-23.25
5	6.06250	0.50	36.94	31.86	37.44	32.36	60.00	50.00	-22.56	-17.64
6	10.45313	0.72	36.54	31.00	37.26	31.72	60.00	50.00	-22.74	-18.28

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

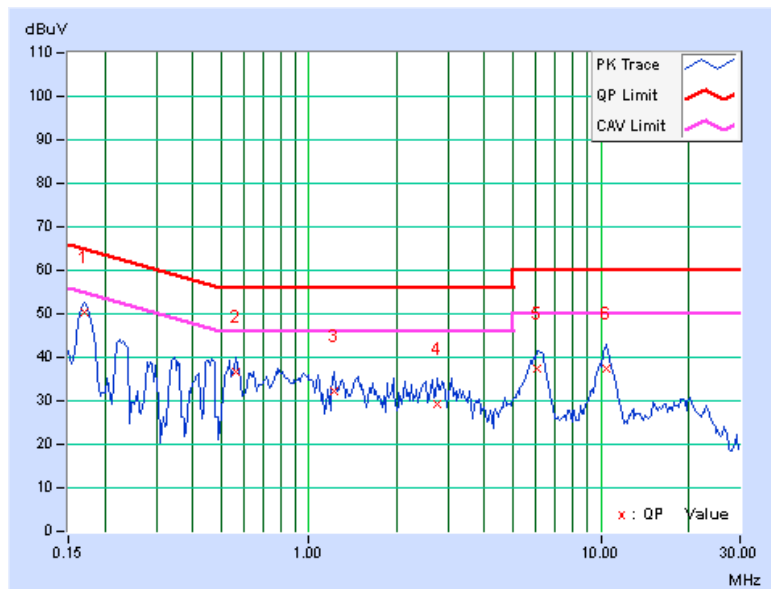


PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
--------------	-------------	----------------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16953	0.06	49.86	42.54	49.92	42.60	64.98
2	0.40547	0.10	35.37	27.52	35.47	27.62	57.74	47.74	-22.27	-20.12
3	0.55625	0.10	30.51	21.80	30.61	21.90	56.00	46.00	-25.39	-24.10
4	1.34375	0.14	25.27	18.79	25.41	18.93	56.00	46.00	-30.59	-27.07
5	6.01172	0.40	33.65	28.41	34.05	28.81	60.00	50.00	-25.95	-21.19
6	10.31250	0.59	33.33	26.99	33.92	27.58	60.00	50.00	-26.08	-22.42

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

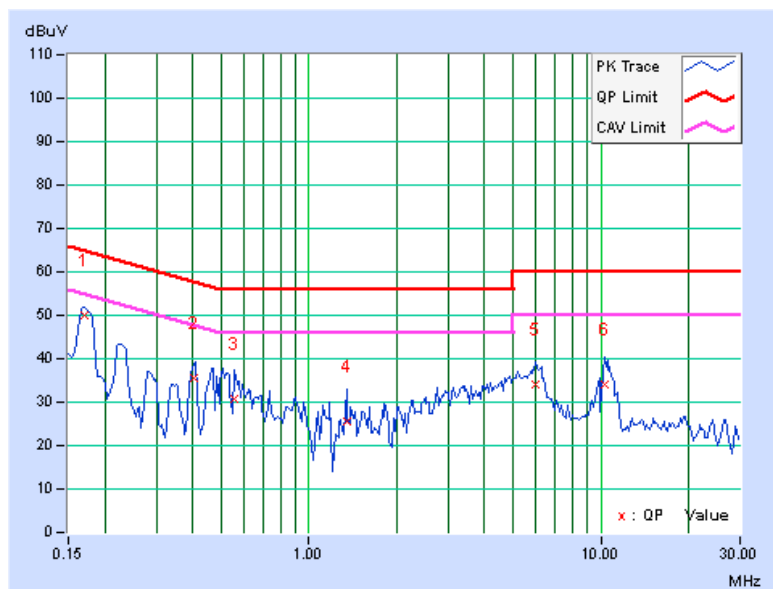

4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dB μ V/m) *note 3
5150~5250	-27	68.3
5250~5350	-27	68.3
5470~5725	-27	68.3
5725~5825	-27 *note 1	68.3
	-17 *note 2	78.3

NOTE:

1. For frequencies 10MHz or greater above or below the band edge.
2. All emissions within the frequency range from the band edge to 10MHz above or below the band edge.
3. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$



A D T

4.2.3 TEST INSTRUMENTS

For below 1GHz

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250254	July 12, 2011	July 11, 2012
Pre-Selector Agilent	N9039A	MY46520311	July 12, 2011	July 11, 2012
Signal Generator Agilent	N5181A	MY49060517	July 12, 2011	July 11, 2012
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 15, 2011	Nov. 14, 2012
Pre-Amplifier Agilent	8449B	3008A02578	July 04, 2011	July 03, 2012
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Apr. 09, 2012	Apr. 08, 2013
Horn_Antenna AISI	AIH.8018	0000320091110	Nov. 14, 2011	Nov. 13, 2012
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 07, 2011	Oct. 06, 2012
Loop Antenna R&S	HFH2-Z2	100070	Jan. 31, 2012	Jan. 30, 2014
RF Cable	NA	RF104-201 RF104-203 RF104-204	Dec. 26, 2011	Dec. 25, 2012
RF Cable	NA	CHGCAB_001	Oct. 07, 2011	Oct. 06, 2012
Software	ADT_Radiated _V8.7.05	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. * = The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
- 3 The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in 966 Chamber No. G.
- 5 The FCC Site Registration No. is 966073.
- 6 The VCCI Site Registration No. is G-137.
- 7 The CANADA Site Registration No. is IC 7450H-2.
- 8 Loop antenna was used for all emissions below 30 MHz.
- 9 Tested Date: June 07, 2012



A D T

For above 1GHz

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250253	Aug. 29, 2011	Aug. 28, 2012
Agilent Pre-Selector	N9039A	MY46520310	Aug. 29, 2011	Aug. 28, 2012
Agilent Signal Generator	N5181A	MY49060347	July 25, 2011	July 24, 2012
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-04	Nov. 15, 2011	Nov. 14, 2012
Agilent Pre-Amplifier	8449B	3008A02465	Feb. 27, 2012	Feb. 26, 2013
SPACEK LABS	SLKka-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-361	Apr. 06, 2012	Apr. 05, 2013
AISI Horn_Antenna	AIH.8018	0000220091110	Nov. 23, 2011	Nov. 22, 2012
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 07, 2011	Oct. 06, 2012
*R&S Loop Antenna	HFH2-Z2	100070	Jan. 31, 2012	Jan. 30, 2014
RF Cable	NA	RF104-205 RF104-207 RF104-202	Dec. 27, 2011	Dec. 26, 2012
RF Cable	NA	CHHCAB_001	Oct. 08, 2011	Oct. 07, 2012
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. * = The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in 966 Chamber No. H.
5. The FCC Site Registration No. is 797305.
6. The CANADA Site Registration No. is IC 7450H-3.
7. Loop antenna was used for all emissions below 30 MHz.
8. Tested Date: June 02, 2012

4.2.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.2.5 DEVIATION FROM TEST STANDARD

No deviation

4.2.6 TEST SETUP

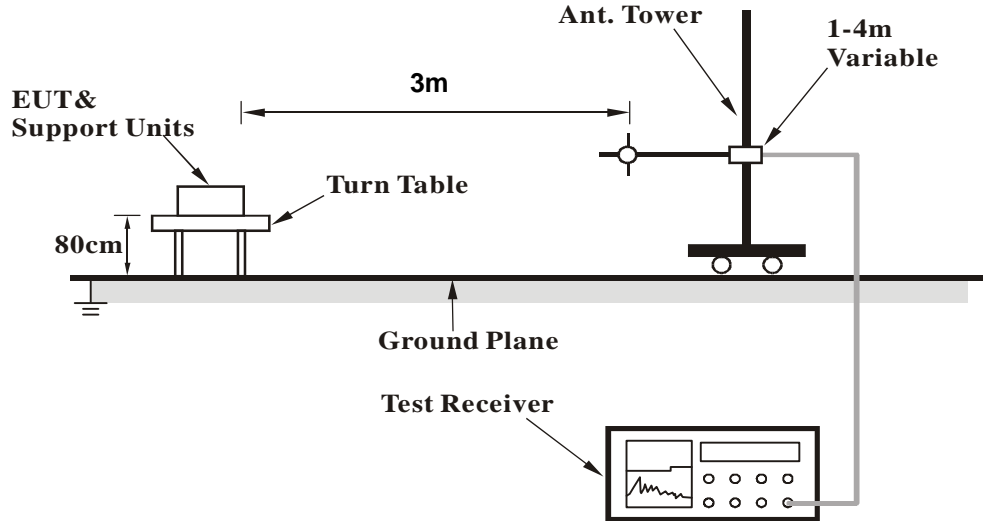

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.7 EUT OPERATING CONDITION

Same as 4.1.6

4.2.8 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

802.11ac BW80

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	164.00	37.1 QP	43.5	-6.4	1.45 H	54	23.02	14.08
2	251.00	36.6 QP	46.0	-9.4	1.02 H	254	23.23	13.39
3	375.00	34.9 QP	46.0	-11.1	1.25 H	358	17.67	17.22
4	498.00	38.9 QP	46.0	-7.1	1.23 H	219	18.59	20.34
5	700.01	38.0 QP	46.0	-8.0	1.02 H	24	14.06	23.97
6	750.00	42.0 QP	46.0	-4.0	1.23 H	142	17.13	24.91
7	875.12	41.0 QP	46.0	-5.0	1.97 H	245	13.89	27.12
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	50.01	36.6 QP	40.0	-3.4	1.50 V	356	22.49	14.09
2	124.90	37.2 QP	43.5	-6.3	1.24 V	111	24.29	12.90
3	500.00	38.6 QP	46.0	-7.4	1.00 V	360	18.20	20.39
4	625.03	36.1 QP	46.0	-9.9	1.25 V	222	13.09	22.98
5	725.02	40.3 QP	46.0	-5.7	2.00 V	311	15.87	24.44
6	875.06	40.8 QP	46.0	-5.2	1.00 V	352	13.71	27.12

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

ABOVE 1GHz DATA

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
---	--	--	--	--	--	--	--	--

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5100.00	60.1 PK	74.0	-13.9	1.00 H	261	20.29	39.81
2	5100.00	47.2 AV	54.0	-6.8	1.00 H	261	7.39	39.81
3	5150.00	57.4 PK	74.0	-16.6	1.00 H	261	17.46	39.94
4	5150.00	46.2 AV	54.0	-7.8	1.00 H	261	6.26	39.94
5	*5180.00	104.6 PK			1.00 H	261	64.58	40.02
6	*5180.00	93.8 AV			1.00 H	261	53.78	40.02
7	#10360.00	56.5 PK	68.3	-11.8	1.22 H	53	9.97	46.53
8	15540.00	64.9 PK	74.0	-9.1	1.39 H	123	13.53	51.37
9	15540.00	50.1 AV	54.0	-3.9	1.39 H	123	-1.27	51.37

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
---	--	--	--	--	--	--	--	--

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5100.00	62.5 PK	74.0	-11.5	1.00 V	245	22.69	39.81
2	5100.00	52.5 AV	54.0	-1.5	1.00 V	245	12.69	39.81
3	5150.00	58.1 PK	74.0	-15.9	1.00 V	245	18.16	39.94
4	5150.00	46.2 AV	54.0	-7.8	1.00 V	245	6.26	39.94
5	*5180.00	111.6 PK			1.00 V	245	71.58	40.02
6	*5180.00	100.8 AV			1.00 V	245	60.78	40.02
7	#10360.00	56.3 PK	68.3	-12.0	1.00 V	125	9.77	46.53
8	15540.00	60.7 PK	74.0	-13.3	1.05 V	85	9.33	51.37
9	15540.00	49.9 AV	54.0	-4.1	1.05 V	85	-1.47	51.37

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	103.4 PK			1.00 H	256	63.33	40.07
2	*5200.00	93.5 AV			1.00 H	256	53.43	40.07
3	#10400.00	56.6 PK	68.3	-11.7	1.19 H	58	10.03	46.57
4	15600.00	64.7 PK	74.0	-9.3	1.34 H	121	13.23	51.47
5	15600.00	49.8 AV	54.0	-4.2	1.34 H	121	-1.67	51.47

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	111.5 PK			1.00 V	244	71.43	40.07
2	*5200.00	100.7 AV			1.00 V	244	60.63	40.07
3	#10400.00	56.4 PK	68.3	-11.9	1.00 V	124	9.83	46.57
4	15600.00	60.2 PK	74.0	-13.8	1.01 V	88	8.73	51.47
5	15600.00	49.6 AV	54.0	-4.4	1.01 V	88	-1.87	51.47

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	104.9 PK			1.00 H	262	64.73	40.17
2	*5240.00	94.2 AV			1.00 H	262	54.03	40.17
3	5350.00	56.5 PK	74.0	-17.5	1.00 H	262	16.03	40.47
4	5350.00	45.1 AV	54.0	-8.9	1.00 H	262	4.63	40.47
5	5396.00	57.1 PK	74.0	-16.9	1.00 H	262	16.50	40.60
6	5396.00	46.2 AV	54.0	-7.8	1.00 H	262	5.60	40.60
7	#10480.00	56.9 PK	68.3	-11.4	1.17 H	51	10.23	46.67
8	15720.00	63.8 PK	74.0	-10.2	1.34 H	121	12.29	51.51
9	15720.00	49.9 AV	54.0	-4.1	1.34 H	121	-1.61	51.51

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	111.9 PK			1.00 V	245	71.73	40.17
2	*5240.00	101.3 AV			1.00 V	245	61.13	40.17
3	5350.00	57.3 PK	74.0	-16.7	1.00 V	245	16.83	40.47
4	5350.00	46.4 AV	54.0	-7.6	1.00 V	245	5.93	40.47
5	5396.00	58.8 PK	74.0	-15.2	1.00 V	245	18.20	40.60
6	5396.00	47.8 AV	54.0	-6.2	1.00 V	245	7.20	40.60
7	#10480.00	56.1 PK	68.3	-12.2	1.00 V	124	9.43	46.67
8	15720.00	59.6 PK	74.0	-14.4	1.05 V	85	8.09	51.51
9	15720.00	49.4 AV	54.0	-4.6	1.05 V	85	-2.11	51.51

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

802.11ac BW20

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5098.60	62.1 PK	74.0	-11.9	1.00 H	261	22.29	39.81
2	5098.60	51.5 AV	54.0	-2.5	1.00 H	261	11.69	39.81
3	5150.00	57.4 PK	74.0	-16.6	1.00 H	261	17.46	39.94
4	5150.00	46.2 AV	54.0	-7.8	1.00 H	261	6.26	39.94
5	*5180.00	101.4 PK			1.31 H	109	61.38	40.02
6	*5180.00	92.8 AV			1.31 H	109	52.78	40.02
7	#10360.00	56.5 PK	68.3	-11.8	1.22 H	53	9.97	46.53
8	15540.00	64.9 PK	74.0	-9.1	1.39 H	123	13.53	51.37
9	15540.00	50.1 AV	54.0	-3.9	1.39 H	123	-1.27	51.37

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5098.60	63.6 PK	74.0	-10.4	1.00 V	68	23.79	39.81
2	5098.60	53.5 AV	54.0	-0.5	1.00 V	68	13.69	39.81
3	5150.00	60.5 PK	74.0	-13.5	1.00 V	68	20.56	39.94
4	5150.00	47.5 AV	54.0	-6.5	1.00 V	68	7.56	39.94
5	*5180.00	110.8 PK			1.00 V	68	70.78	40.02
6	*5180.00	101.0 AV			1.00 V	68	60.98	40.02
7	#10360.00	57.5 PK	68.3	-10.8	1.16 V	186	10.97	46.53
8	15540.00	62.8 PK	74.0	-11.2	1.32 V	143	11.43	51.37
9	15540.00	50.3 AV	54.0	-3.7	1.32 V	143	-1.07	51.37

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5120.50	60.4 PK	74.0	-13.6	1.00 H	262	20.54	39.86
2	5120.50	50.3 AV	54.0	-3.7	1.00 H	262	10.44	39.86
3	5150.00	57.0 PK	74.0	-17.0	1.34 H	121	17.06	39.94
4	5150.00	45.8 AV	54.0	-8.2	1.34 H	121	5.86	39.94
5	*5200.00	101.8 PK			1.31 H	110	61.73	40.07
6	*5200.00	93.1 AV			1.31 H	110	53.03	40.07
7	#10400.00	56.6 PK	68.3	-11.7	1.19 H	58	10.03	46.57
8	15600.00	64.7 PK	74.0	-9.3	1.34 H	121	13.23	51.47
9	15600.00	49.8 AV	54.0	-4.2	1.34 H	121	-1.67	51.47

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5120.50	61.7 PK	74.0	-12.3	1.00 V	244	21.84	39.86
2	5120.50	52.6 AV	54.0	-1.4	1.00 V	244	12.74	39.86
3	5150.00	57.9 PK	74.0	-16.1	1.00 V	244	17.96	39.94
4	5150.00	46.5 AV	54.0	-7.5	1.00 V	244	6.56	39.94
5	*5200.00	110.3 PK			1.00 V	244	70.23	40.07
6	*5200.00	101.1 AV			1.00 V	244	61.03	40.07
7	#10400.00	57.0 PK	68.3	-11.3	1.19 V	172	10.43	46.57
8	15600.00	63.0 PK	74.0	-11.0	1.34 V	138	11.53	51.47
9	15600.00	50.7 AV	54.0	-3.3	1.34 V	138	-0.77	51.47

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5080.00	59.9 PK	74.0	-14.1	1.38 H	99	20.14	39.76
2	5080.00	49.1 AV	54.0	-4.9	1.38 H	99	9.34	39.76
3	5150.00	61.6 PK	74.0	-12.4	1.00 H	257	21.66	39.94
4	5150.00	45.9 AV	54.0	-8.1	1.00 H	257	5.96	39.94
5	*5240.00	102.1 PK			1.32 H	111	61.93	40.17
6	*5240.00	93.4 AV			1.32 H	111	53.23	40.17
7	#10480.00	56.5 PK	68.3	-11.8	1.10 H	44	9.83	46.67
8	15720.00	63.2 PK	74.0	-10.8	1.38 H	99	11.69	51.51
9	15720.00	49.6 AV	54.0	-4.4	1.38 H	99	-1.91	51.51

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5080.00	60.9 PK	74.0	-13.1	1.00 V	245	21.14	39.76
2	5080.00	49.8 AV	54.0	-4.2	1.00 V	245	10.04	39.76
3	5150.00	57.4 PK	74.0	-16.6	1.00 V	245	17.46	39.94
4	5150.00	46.6 AV	54.0	-7.4	1.00 V	245	6.66	39.94
5	*5240.00	110.5 PK			1.00 V	244	70.33	40.17
6	*5240.00	101.5 AV			1.00 V	244	61.33	40.17
7	#10480.00	56.1 PK	68.3	-12.2	1.15 V	191	9.43	46.67
8	15720.00	61.7 PK	74.0	-12.3	1.35 V	152	10.19	51.51
9	15720.00	49.9 AV	54.0	-4.1	1.35 V	152	-1.61	51.51

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

802.11ac BW40

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5030.00	61.3 PK	74.0	-12.7	1.32 H	112	21.67	39.63
2	5030.00	50.0 AV	54.0	-4.0	1.32 H	112	10.37	39.63
3	5103.50	61.1 PK	74.0	-12.9	1.32 H	112	21.28	39.82
4	5103.50	49.6 AV	54.0	-4.4	1.32 H	112	9.78	39.82
5	5150.00	61.2 PK	74.0	-12.8	1.32 H	112	21.26	39.94
6	5150.00	49.9 AV	54.0	-4.1	1.32 H	112	9.96	39.94
7	*5190.00	100.1 PK			1.32 H	112	60.06	40.04
8	*5190.00	89.4 AV			1.32 H	112	49.36	40.04
9	#10380.00	57.1 PK	68.3	-11.2	1.16 H	36	10.55	46.55
10	15570.00	64.0 PK	74.0	-10.0	1.33 H	120	12.58	51.42
11	15570.00	50.3 AV	54.0	-3.7	1.33 H	120	-1.12	51.42

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5030.00	60.3 PK	74.0	-13.7	1.02 V	67	20.67	39.63
2	5030.00	51.4 AV	54.0	-2.6	1.02 V	67	11.77	39.63
3	5103.50	63.3 PK	74.0	-10.7	1.02 V	67	23.48	39.82
4	5103.50	52.1 AV	54.0	-1.9	1.02 V	67	12.28	39.82
5	5150.00	66.3 PK	74.0	-7.7	1.02 V	67	26.36	39.94
6	5150.00	53.1 AV	54.0	-0.9	1.02 V	67	13.16	39.94
7	*5190.00	108.3 PK			1.00 V	67	68.26	40.04
8	*5190.00	97.3 AV			1.00 V	67	57.26	40.04
9	#10380.00	57.4 PK	68.3	-10.9	1.25 V	181	10.85	46.55
10	15570.00	62.8 PK	74.0	-11.2	1.37 V	143	11.38	51.42
11	15570.00	50.5 AV	54.0	-3.5	1.37 V	143	-0.92	51.42

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5070.00	59.8 PK	74.0	-14.2	1.00 H	263	20.07	39.73
2	5070.00	49.4 AV	54.0	-4.6	1.00 H	263	9.67	39.73
3	5145.00	61.6 PK	74.0	-12.4	1.00 H	257	21.67	39.93
4	5145.00	49.1 AV	54.0	-4.9	1.00 H	257	9.17	39.93
5	*5230.00	100.1 PK			1.42 H	221	59.95	40.15
6	*5230.00	89.1 AV			1.42 H	221	48.95	40.15
7	#10460.00	56.5 PK	68.3	-11.8	1.10 H	44	9.85	46.65
8	15690.00	63.2 PK	74.0	-10.8	1.38 H	99	11.71	51.49
9	15690.00	49.6 AV	54.0	-4.4	1.38 H	99	-1.89	51.49

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5070.00	60.7 PK	74.0	-13.3	1.00 V	244	20.97	39.73
2	5070.00	50.4 AV	54.0	-3.6	1.00 V	244	10.67	39.73
3	5145.00	61.8 PK	74.0	-12.2	1.00 V	244	21.87	39.93
4	5145.00	51.3 AV	54.0	-2.7	1.00 V	244	11.37	39.93
5	*5230.00	108.1 PK			1.00 V	244	67.95	40.15
6	*5230.00	97.1 AV			1.00 V	244	56.95	40.15
7	#10460.00	54.3 PK	68.3	-14.0	1.23 V	182	7.65	46.65
8	15690.00	60.5 PK	74.0	-13.5	1.41 V	126	9.01	51.49
9	15690.00	49.5 AV	54.0	-4.5	1.41 V	126	-1.99	51.49

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

802.11ac BW80

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	61.7 PK	74.0	-12.3	1.00 H	263	21.76	39.94
2	5150.00	49.4 AV	54.0	-4.6	1.00 H	263	9.46	39.94
3	*5210.00	94.9 PK			1.42 H	224	54.80	40.10
4	*5210.00	82.3 AV			1.42 H	224	42.20	40.10
5	#10420.00	56.5 PK	68.3	-11.8	1.04 H	39	9.90	46.60
6	15630.00	62.9 PK	74.0	-11.1	1.33 H	101	11.42	51.48
7	15630.00	49.3 AV	54.0	-4.7	1.33 H	101	-2.18	51.48

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	64.8 PK	74.0	-9.2	1.00 V	67	24.86	39.94
2	5150.00	53.1 AV	54.0	-0.9	1.00 V	67	13.16	39.94
3	*5210.00	103.9 PK			1.00 V	67	63.80	40.10
4	*5210.00	90.1 AV			1.00 V	67	50.00	40.10
5	#10420.00	56.2 PK	68.3	-12.1	1.27 V	168	9.60	46.60
6	15630.00	60.6 PK	74.0	-13.4	1.35 V	140	9.12	51.48
7	15630.00	48.7 AV	54.0	-5.3	1.35 V	140	-2.78	51.48

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

4.3 TRANSMIT POWER MEASUREMENT

4.3.1 LIMITS OF TRANSMIT POWER MEASUREMENT

Frequency Band	Limit
5.15 – 5.25GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB
5.25 – 5.35GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.47 – 5.725GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.725 – 5.825GHz	The lesser of 1W (30dBm) or 17dBm + 10logB

NOTE: Where B is the 26dB emission bandwidth in MHz.

4.3.2 TEST INSTRUMENTS

FOR POWER OUTPUT MEASUREMENT

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power Meter	ML2495A	0824006	May 10, 2012	May 09, 2013
Average Power Sensor	MA2411B	0738172	May 10, 2012	May 09, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 15, 2012

FOR 26dB OCCUPIED BANDWIDTH

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer	E4446A	MY48250113	Nov. 30, 2011	Nov. 29, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 15, 2012

4.3.3 TEST PROCEDURE

FOR POWER OUTPUT MEASUREMENT

Follow FCC KDB 789033 UNII test procedure:

Method SA-1

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW =1MHz.
- 3) Set the VBW $\geq 3 \times$ RBW.
- 4) Number of points in sweep ≥ 2 Span / RBW.
- 5) Sweep time = auto.
- 6) Set trigger to free run (duty cycle ≥ 98 percent) ; Set video trigger (duty cycle < 98 percent)
- 6) Detector = RMS.
- 7) Trace average at least 100 traces in power averaging mode
- 8) Compute power by integrating the spectrum across the 26 dB EBW of the signal.


FOR 26dB OCCUPIED BANDWIDTH

- 1) Set RBW = approximately 1% of the emission bandwidth.
- 2) Set the VBW > RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.3.7 TEST RESULTS

POWER OUTPUT:

802.11a

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
36	5180	7.72	7.27	8.05	17.632	12.46	15.23	PASS
40	5200	7.85	7.30	8.14	17.981	12.55	15.23	PASS
48	5240	8.11	7.26	8.02	18.131	12.58	15.23	PASS

Note: Directional gain = $10 \log[(10^{G1(\text{Chain}0)/20} + 10^{G2(\text{Chain}1)/20})^2 / 2]$

Effective Legacy Gain (dBi) = 7.77

The effective legacy gain is 7.77dBi, therefore the limit needs to reduce.

802.11ac (BW20)

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
36	5180	10.04	9.69	10.10	29.637	14.72	17	PASS
40	5200	9.94	9.37	10.01	28.536	14.55	17	PASS
48	5240	9.95	9.32	10.05	28.553	14.56	17	PASS

802.11ac (BW40)

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
38	5190	10.09	9.19	9.71	27.862	14.45	17	PASS
46	5230	10.99	9.61	10.66	33.342	15.23	17	PASS

802.11ac (BW80)

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
42	5210	7.88	7.11	8.15	17.809	12.51	17	PASS



A D T

26dB BANDWIDTH:

802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)		
		CHAIN 0	CHAIN 1	CHAIN 2
36	5180	20.49	20.63	20.28
40	5200	20.53	20.43	20.48
48	5240	20.62	20.60	20.33

802.11ac (BW20)

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)		
		CHAIN 0	CHAIN 1	CHAIN 2
36	5180	20.99	20.62	20.81
40	5200	20.90	20.55	20.70
48	5240	20.83	20.66	20.67

802.11ac (BW40)

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)		
		CHAIN 0	CHAIN 1	CHAIN 2
38	5190	41.63	41.31	41.08
46	5230	41.58	41.24	41.08

802.11ac (BW80)

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)		
		CHAIN 0	CHAIN 1	CHAIN 2
42	5210	83.05	82.98	82.67

4.4 PEAK POWER SPECTRAL DENSITY MEASUREMENT

4.4.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

Frequency Band	Limit
5.15 ~ 5.25GHz	4dBm
5.25 ~ 5.35GHz	11dBm
5.47 ~ 5.725GHz	11dBm
5.725 ~ 5.825GHz	17dBm

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer	E4446A	MY48250113	Nov. 30, 2011	Nov. 29, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 15, 2012


4.4.3 TEST PROCEDURES

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 1 MHz, Set VBW \geq 3 MHz, Detector = RMS
- 3) Sweep time = auto, trigger set to "free run".
- 4) Trace average at least 100 traces in power averaging mode.
- 5) Record the max value

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as 4.3.6



4.4.7 TEST RESULTS

802.11a

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)			TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2			
36	5180	-2.44	-3.25	-2.68	1.70	2.23	PASS
40	5200	-2.29	-3.27	-2.62	1.66	2.23	PASS
48	5240	-1.77	-3.02	-2.41	1.76	2.23	PASS

NOTE: Directional gain = $10 \log[(10^{G1(\text{Chain0})/20} + 10^{G2(\text{Chain1})/20})^2 / 2]$

Effective Legacy Gain (dBi) = 7.77

The effective legacy gain is 7.77dBi, therefore the limit needs to reduce.

Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer

802.11ac (BW20)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)			TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2			
36	5180	-0.86	-0.78	-0.59	3.85	4	PASS
40	5200	-0.94	-0.94	-0.21	3.82	4	PASS
48	5240	-0.76	-1.29	0.41	3.89	4	PASS

NOTE: Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.

802.11ac (BW40)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)			TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2			
38	5190	-3.15	-4.97	-3.26	0.77	4	PASS
46	5230	-2.55	-3.43	-2.14	1.61	4	PASS

NOTE: Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.



A D T

802.11ac (BW80)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)			TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2			
42	5210	-8.01	-8.38	-7.38	-3.45	4	PASS

NOTE: Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.

4.5 PEAK POWER EXCURSION MEASUREMENT

4.5.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

Shall not exceed 13 dB

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer	E4446A	MY48250113	Nov. 30, 2011	Nov. 29, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 15, 2012


4.5.3 TEST PROCEDURE

- 1) Set RBW = 1 MHz, VBW \geq 3 MHz, Detector = peak.
- 2) Trace mode = max-hold. Allow the sweeps to continue until the trace stabilizes.
- 3) Use the peak search function to find the peak of the spectrum.
- 4) Measure the PPSD.
- 5) Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



A D T

4.5.7 TEST RESULTS


802.11a

CHAN.	CHAN. FREQ. (MHz)	PEAK VALUE (dBm)			PPSD (dBm)			PEAK EXCURSION (dB)			LIMIT (dB)	PASS/ FAIL
		CHAIN 0	CHAIN 1	CHAIN 2	CHAIN 0	CHAIN 1	CHAIN 2	CHAIN 0	CHAIN 1	CHAIN 2		
36	5180	7.47	6.26	6.56	-2.44	-3.25	-2.68	9.91	9.51	9.24	13	PASS
40	5200	7.09	6.14	6.57	-2.29	-3.27	-2.62	9.38	9.41	9.19	13	PASS
48	5240	7.36	6.80	6.43	-1.77	-3.02	-2.41	9.13	9.82	8.84	13	PASS




A D T

For Chain (0): CH 36

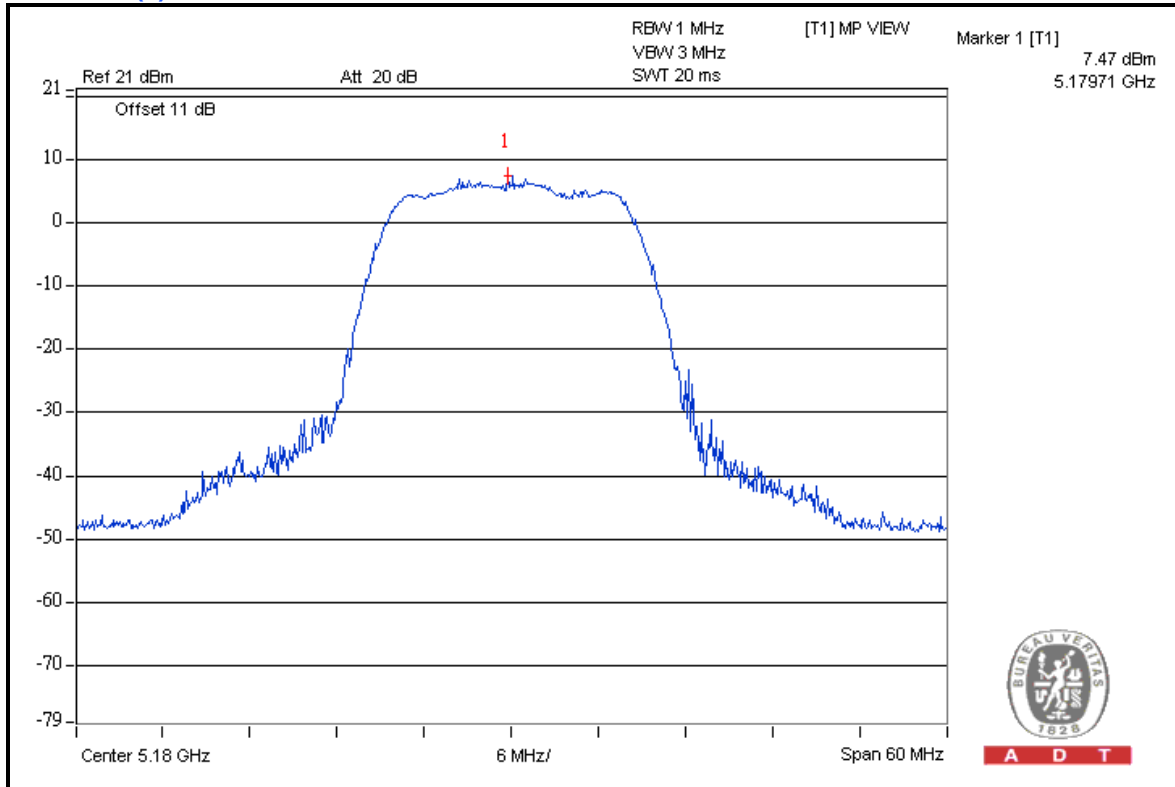

A D T

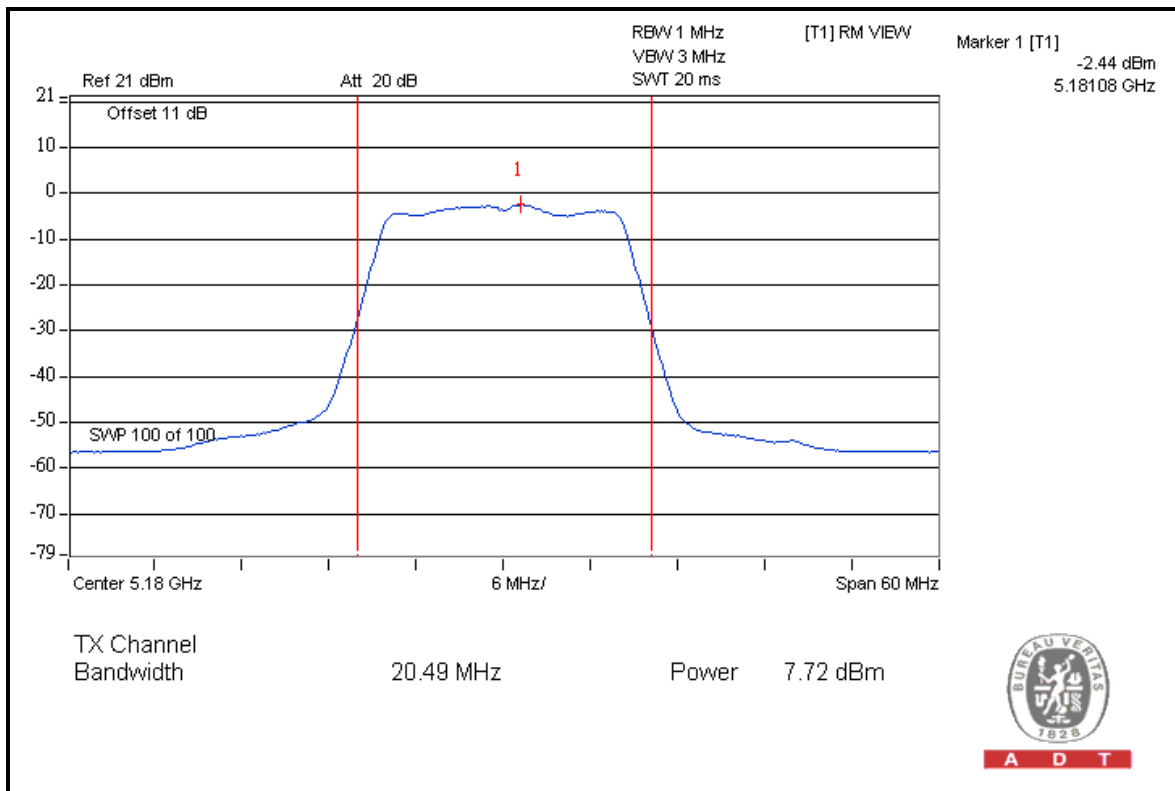

A D T



A D T


802.11ac (BW20)

CHAN.	CHAN. FREQ. (MHz)	PEAK VALUE (dBm)			PPSD (dBm)			PEAK EXCURSION (dB)			LIMIT (dB)	PASS/ FAIL
		CHAIN 0	CHAIN 1	CHAIN 2	CHAIN 0	CHAIN 1	CHAIN 2	CHAIN 0	CHAIN 1	CHAIN 2		
36	5180	8.72	8.50	8.33	-0.86	-0.78	-0.59	9.58	9.28	8.92	13	PASS
40	5200	8.62	8.09	8.16	-0.94	-0.94	-0.21	9.56	9.03	8.37	13	PASS
48	5240	8.11	8.55	8.46	-0.76	-1.29	0.41	8.87	9.84	8.05	13	PASS




A D T

For Chain (1): CH 48

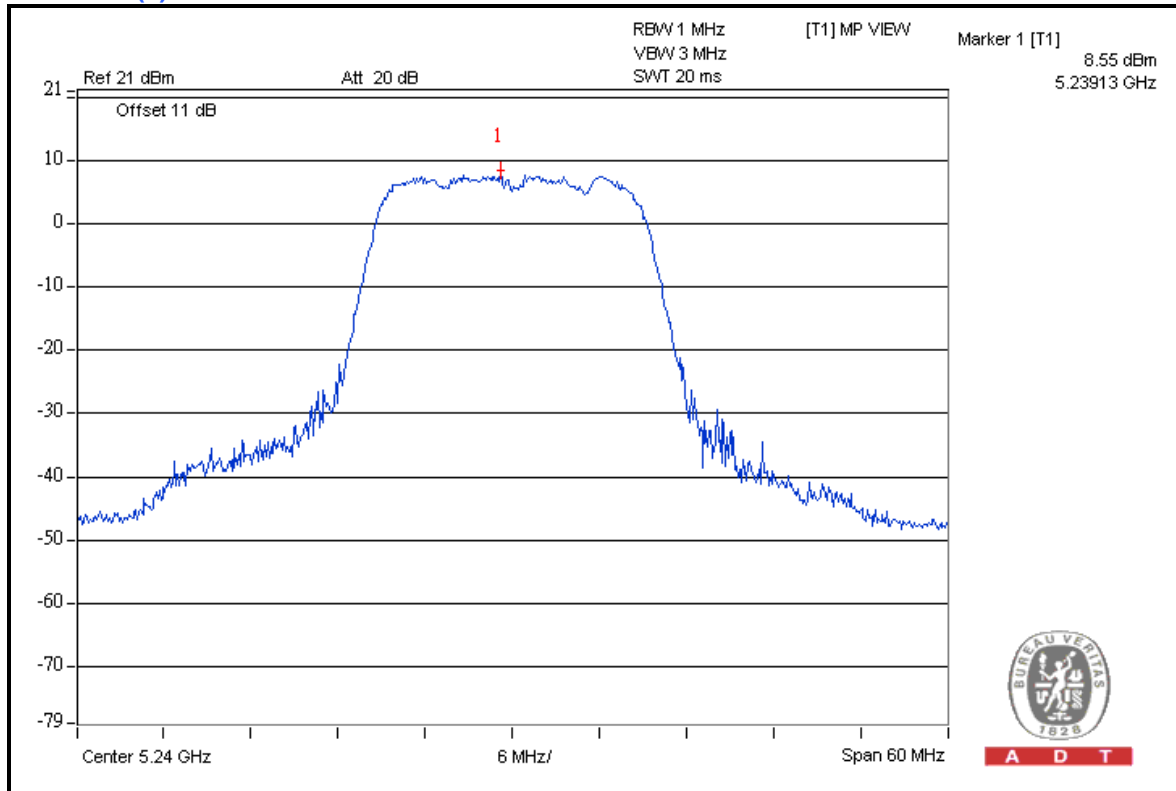

A D T

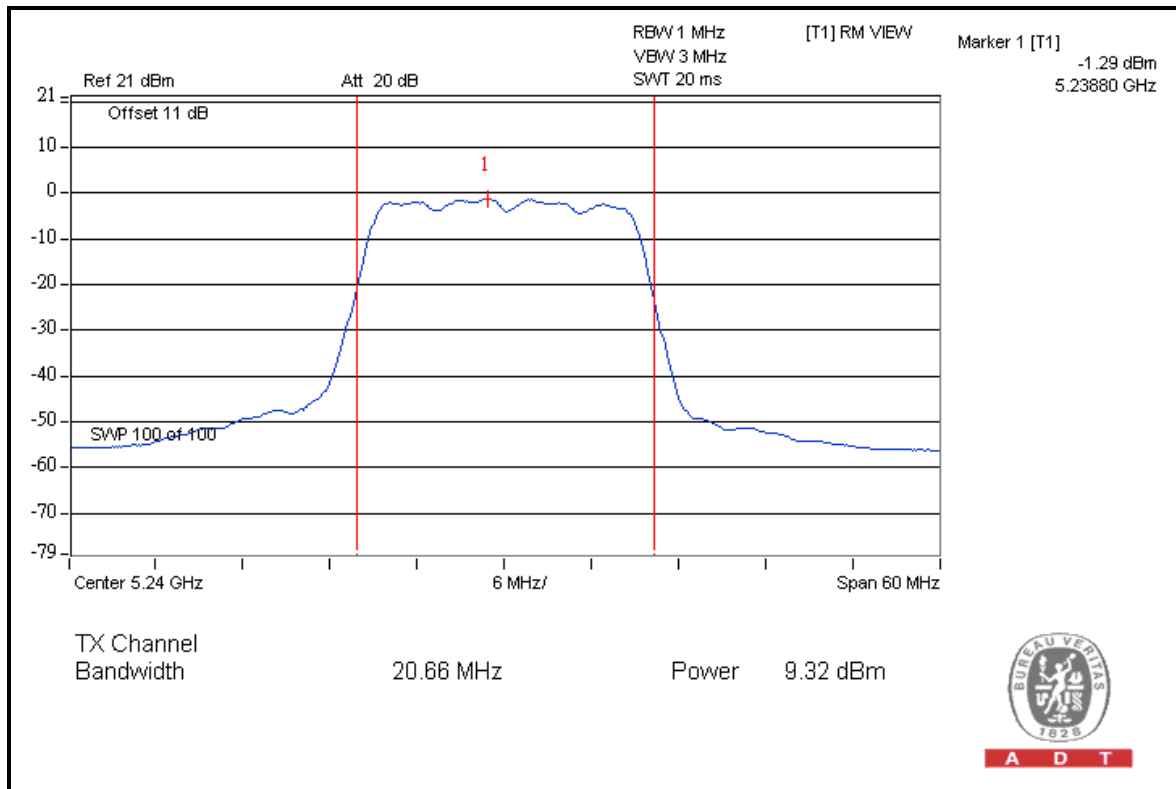

A D T



A D T


802.11ac (BW40)

CHAN.	CHAN. FREQ. (MHz)	PEAK VALUE (dBm)			PPSD (dBm)			PEAK EXCURSION (dB)			LIMIT (dB)	PASS/ FAIL
		CHAIN 0	CHAIN 1	CHAIN 2	CHAIN 0	CHAIN 1	CHAIN 2	CHAIN 0	CHAIN 1	CHAIN 2		
38	5190	6.99	5.80	5.57	-3.15	-4.97	-3.26	10.14	10.77	8.83	13	PASS
46	5230	6.51	5.46	5.88	-2.55	-3.43	-2.14	9.06	8.89	8.02	13	PASS




A D T

For Chain (1): CH 38

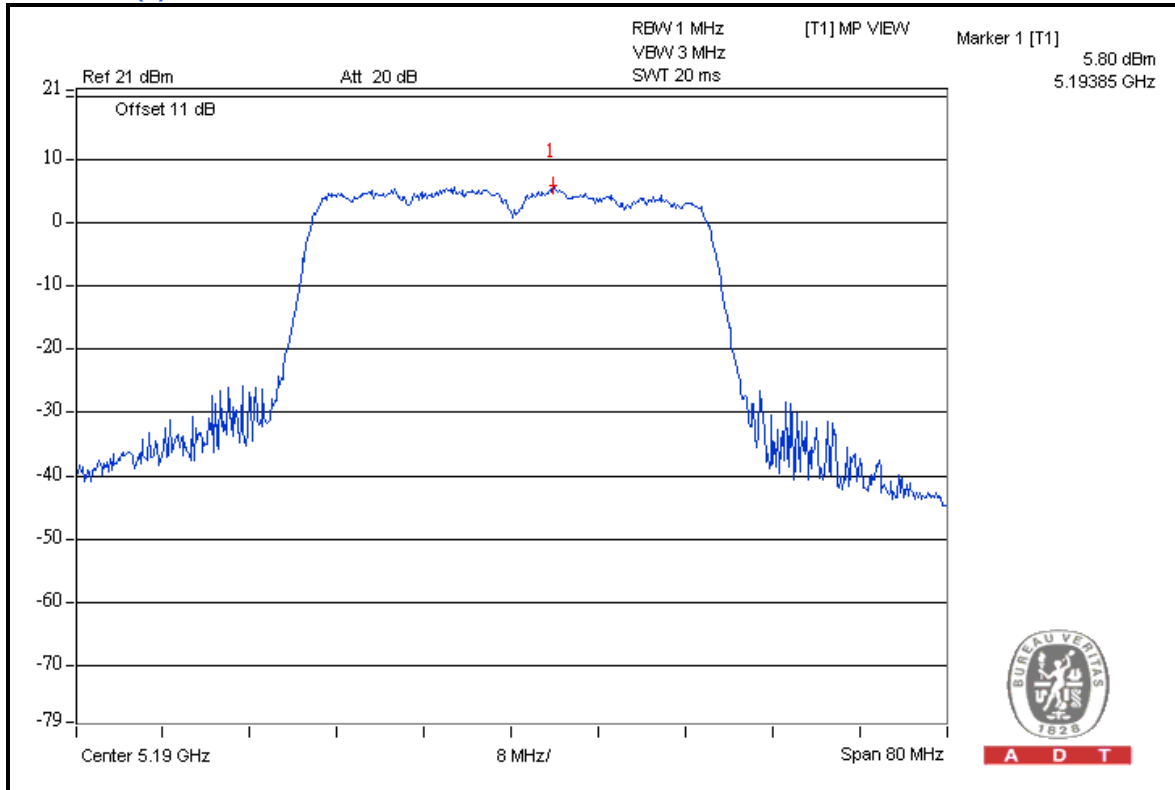

A D T

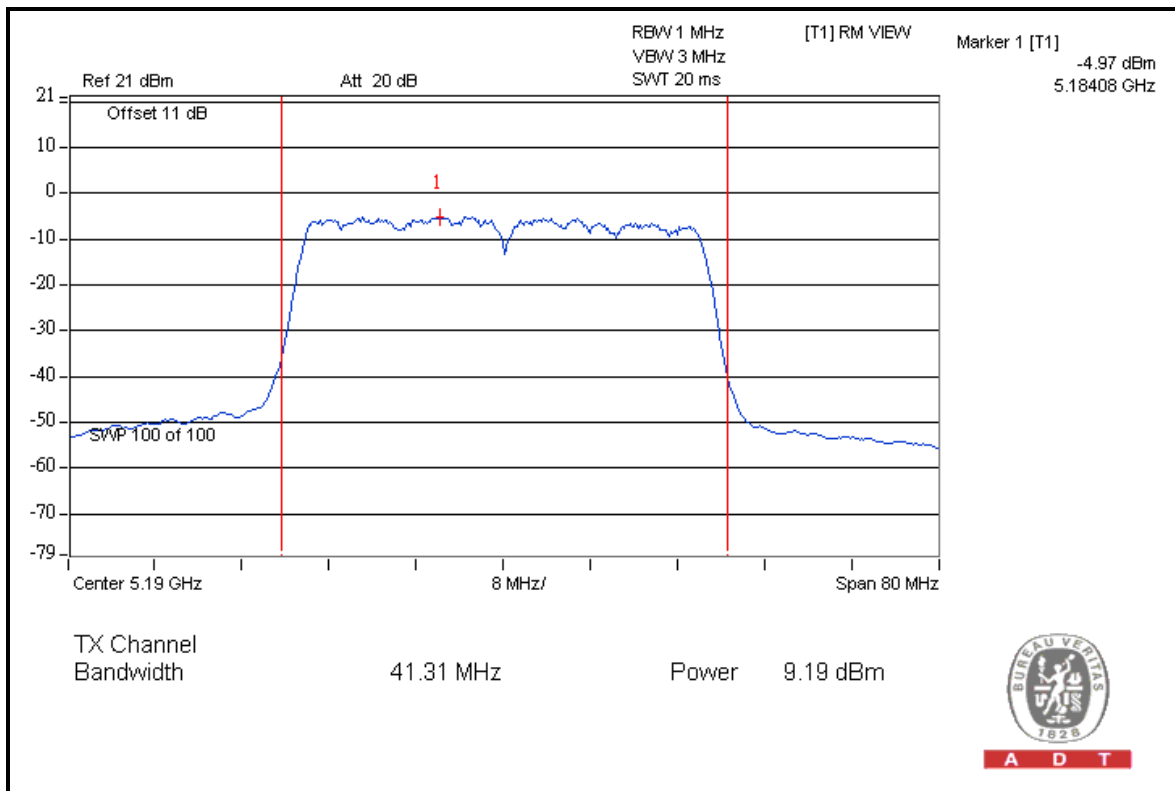

A D T



A D T



802.11ac (BW80)

CHAN.	CHAN. FREQ. (MHz)	PEAK VALUE (dBm)			PPSD (dBm)			PEAK EXCURSION (dB)			LIMIT (dB)	PASS/ FAIL
		CHAIN 0	CHAIN 1	CHAIN 2	CHAIN 0	CHAIN 1	CHAIN 2	CHAIN 0	CHAIN 1	CHAIN 2		
42	5210	1.87	1.75	2.94	-8.01	-8.38	-7.38	9.88	10.13	10.32	13	PASS



A D T

For Chain (2): CH 42

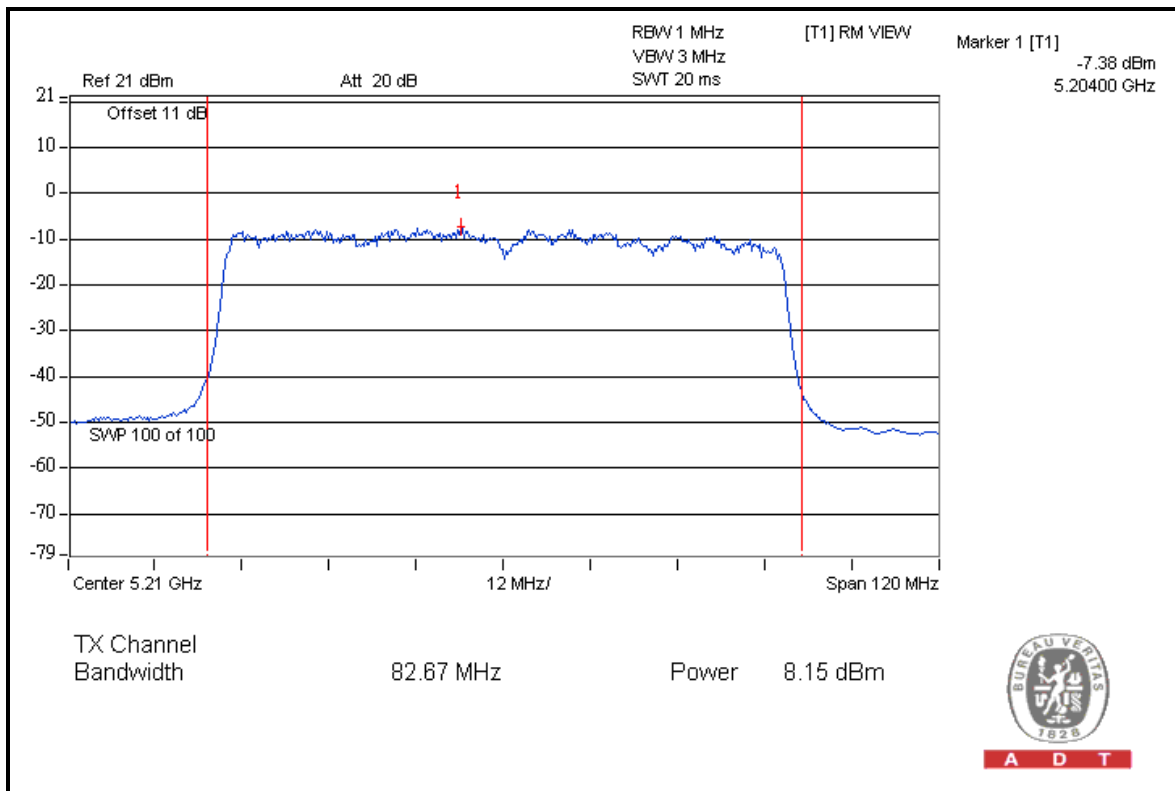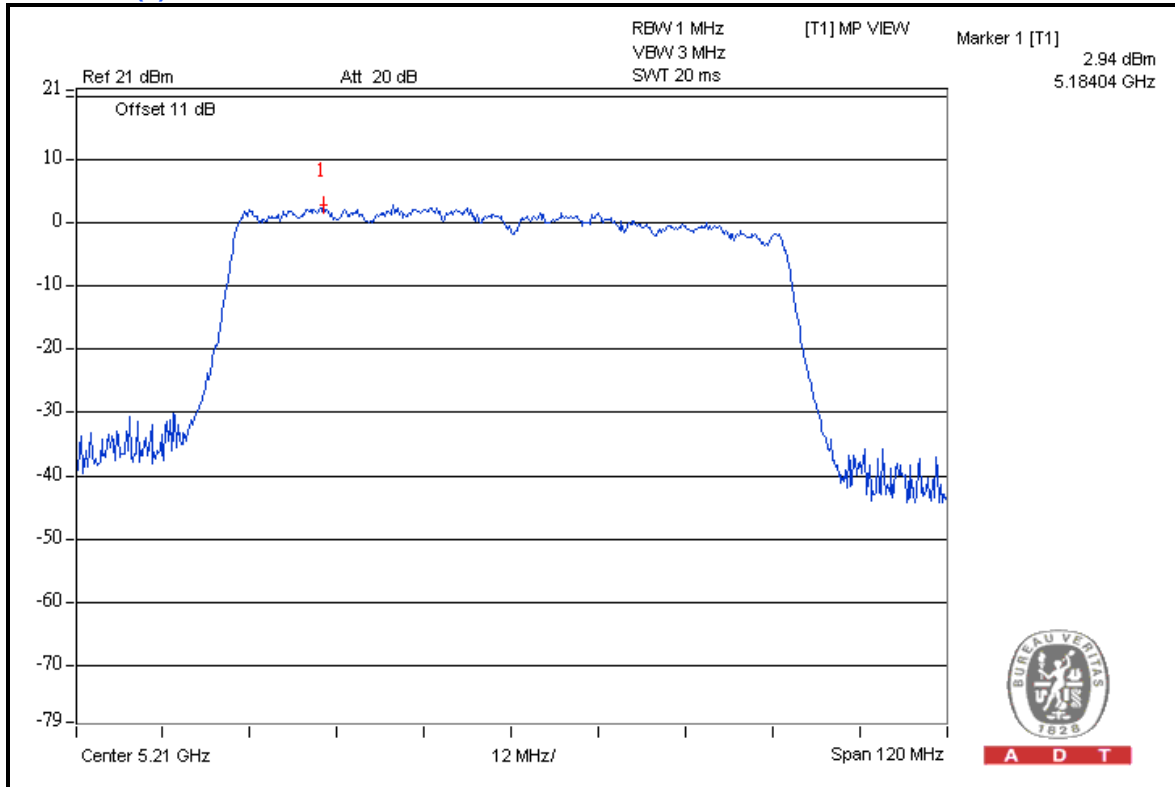



A D T

4.6 FREQUENCY STABILITY

4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency of the carrier signal shall be maintained within band of operation

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Dec. 14, 2011	Dec. 13, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 15, 2012


4.6.3 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

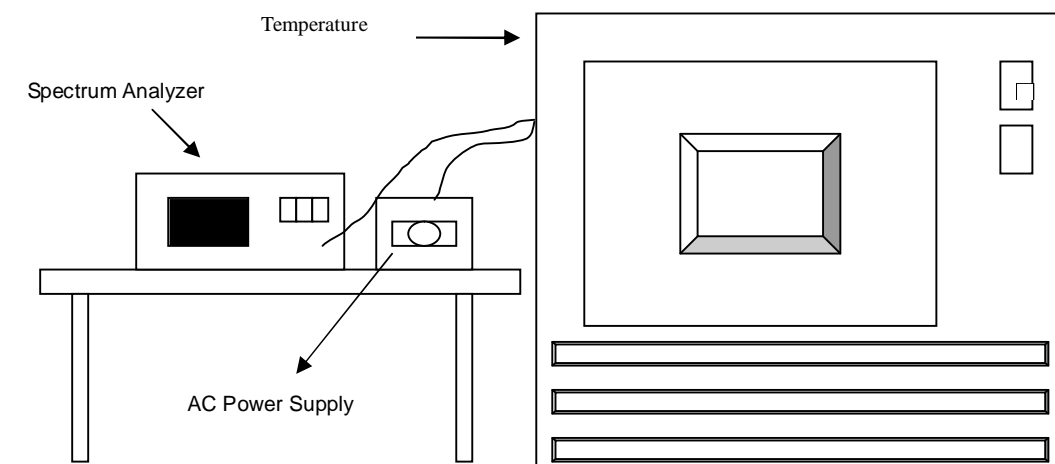

4.6.6 EUT OPERATING CONDITION

Set the EUT transmit at un-modulation mode to test frequency stability.



A D T

4.6.7 TEST RESULTS

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5240MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	ppm	(MHz)	ppm	(MHz)	ppm	(MHz)	ppm
50	120	5240.0052	0.9924	5240.0026	0.4962	5240.0066	1.2595	5240.0037	0.7061
40	120	5239.9885	-2.1947	5239.9925	-1.4313	5239.993	-1.3359	5239.995	-0.9542
30	120	5240.0156	2.9771	5240.0148	2.8244	5240.016	3.0534	5240.0162	3.0916
20	120	5239.9864	-2.5954	5239.9838	-3.0916	5239.9811	-3.6069	5239.9852	-2.8244
10	120	5239.9904	-1.8321	5239.9886	-2.1756	5239.9903	-1.8511	5239.987	-2.4809
0	120	5240.0057	1.0878	5240.0104	1.9847	5240.011	2.0992	5240.0086	1.6412
-10	120	5240.0138	2.6336	5240.0175	3.3397	5240.0226	4.3130	5240.0199	3.7977
-20	120	5240.0149	2.8435	5240.0119	2.2710	5240.012	2.2901	5240.0119	2.2710
-30	120	5240.001	0.1908	5239.9966	-0.6489	5240.0002	0.0382	5239.9972	-0.5344

FREQUENCY STABILITY VERSUS VOLTAGE									
OPERATING FREQUENCY: 5240MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	ppm	(MHz)	ppm	(MHz)	ppm	(MHz)	ppm
20	138	5239.9867	-2.5382	5239.9827	-3.3015	5239.9807	-3.6832	5239.9857	-2.7290
	120	5239.9864	-2.5954	5239.9838	-3.0916	5239.9811	-3.6069	5239.9852	-2.8244
	102	5239.9869	-2.5000	5239.9839	-3.0725	5239.9794	-3.9313	5239.9838	-3.0916



A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).





6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

7.APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---