



FCC TEST REPORT (15.407)

REPORT NO.: RF121222E03-1

MODEL NO.: EA6700

FCC ID: Q87-EA6700

RECEIVED: Dec. 22, 2012

TESTED: Jan. 02 to 07, 2013

ISSUED: Jan. 28, 2013

APPLICANT: Cisco Consumer Products LLC

ADDRESS: 121 Theory Drive Irvine California 92617
United States

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



A D T

Table of Contents

RELEASE CONTROL RECORD	4
1. CERTIFICATION	5
2. SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	12
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	13
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	15
3.4 DUTY CYCLE OF TEST SIGNAL	16
3.5 DESCRIPTION OF SUPPORT UNITS.....	17
3.6 CONFIGURATION OF SYSTEM UNDER TEST	18
4. TEST TYPES AND RESULTS	20
4.1 CONDUCTED EMISSION MEASUREMENT	20
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	20
4.1.2 TEST INSTRUMENTS.....	20
4.1.3 TEST PROCEDURES	21
4.1.4 DEVIATION FROM TEST STANDARD	21
4.1.5 TEST SETUP	21
4.1.6 EUT OPERATING CONDITIONS	22
4.1.7 TEST RESULTS (MODE 1)	23
4.1.8 TEST RESULTS (MODE 2)	25
4.1.9 TEST RESULTS (MODE 3)	27
4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT	29
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	29
4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS.....	29
4.2.3 TEST INSTRUMENTS.....	30
4.2.4 TEST PROCEDURES	31
4.2.5 DEVIATION FROM TEST STANDARD	31
4.2.6 TEST SETUP	32
4.2.7 EUT OPERATING CONDITION	32
4.2.8 TEST RESULTS	33
4.3 TRANSMIT POWER MEASUREMENT	43
4.3.1 LIMITS OF TRANSMIT POWER MEASUREMENT	43
4.3.2 TEST INSTRUMENTS.....	43
4.3.3 TEST PROCEDURE.....	44
4.3.4 DEVIATION FROM TEST STANDARD	44
4.3.5 TEST SETUP	45



A D T

4.3.6	EUT OPERATING CONDITIONS	45
4.3.7	TEST RESULTS	46
4.4	PEAK POWER SPECTRAL DENSITY MEASUREMENT	48
4.4.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT	48
4.4.2	TEST INSTRUMENTS.....	48
4.4.3	TEST PROCEDURES	48
4.4.4	DEVIATION FROM TEST STANDARD.....	48
4.4.5	TEST SETUP	48
4.4.6	EUT OPERATING CONDITIONS	49
4.4.7	TEST RESULTS	50
4.5	PEAK POWER EXCURSION MEASUREMENT	52
4.5.1	LIMITS OF PEAK POWER EXCURSION MEASUREMENT	52
4.5.2	TEST INSTRUMENTS.....	52
4.5.3	TEST PROCEDURE.....	52
4.5.4	DEVIATION FROM TEST STANDARD.....	52
4.5.5	TEST SETUP	52
4.5.6	EUT OPERATING CONDITIONS	52
4.5.7	TEST RESULTS	53
4.6	FREQUENCY STABILITY.....	54
4.6.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	54
4.6.2	TEST INSTRUMENTS.....	54
4.6.3	TEST PROCEDURE.....	54
4.6.4	DEVIATION FROM TEST STANDARD.....	55
4.6.5	TEST SETUP	55
4.6.6	EUT OPERATING CONDITION.....	55
4.6.7	TEST RESULTS	56
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	57
6.	INFORMATION ON THE TESTING LABORATORIES	58
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	59



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF121222E03-1	Original release	Jan. 28, 2013

1. CERTIFICATION

PRODUCT: Linksys Smart Wi-Fi Router AC1750
BRAND NAME: Cisco
MODEL NO.: EA6700
TEST SAMPLE: ENGINEERING SAMPLE
APPLICANT: Cisco Consumer Products LLC
TESTED: Jan. 02 to 07, 2013
STANDARDS: FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10-2009

The above equipment (Model: EA6700) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Phoenix Huang , **DATE:** Jan. 28, 2013
(Phoenix Huang, Specialist)

APPROVED BY : May Chen , **DATE:** Jan. 28, 2013
(May Chen, Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

For 5GHz, 5150~5250MHz

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.407(b)(6)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -6.01dB at 0.15000MHz
15.407(b/1/2/3) (b)(5)	Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.5dB at 5097.00MHz & 5121.00MHz.
15.407(a/1/2/3)	Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit.
15.407(a/1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

NOTE: The EUT was operating in 2.400 ~ 2.4835GHz, 5.15~5.25GHz and 5.725~5.850GHz frequencies band. This report was recorded the RF parameters including 5.15~5.25GHz. For the 2.400 ~ 2.4835GHz and 5.725~5.850GHz RF parameters was recorded in another test report.



A D T

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.98 dB
Radiated emissions (30MHz-1GHz)	5.59 dB
Radiated emissions (1GHz -6GHz)	3.56 dB
Radiated emissions (6GHz -18GHz)	4.10 dB
Radiated emissions (18GHz -40GHz)	4.24 dB



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Linksys Smart Wi-Fi Router AC1750
MODEL NO.	EA6700
POWER SUPPLY	DC 12V from power adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode only.
MODULATION TECHNOLOGY	DSSS,OFDM
TRANSFER RATE	802.11b: up to 11Mbps 802.11a / g: up to 54Mbps 802.11n: up to 450Mbps 802.11ac: up to 1300Mbps
OPERATING FREQUENCY	For 15.407 802.11a/n/ac: 5.18 ~ 5.24GHz
	For 15.247 802.11b/g/n: 2.412 ~ 2.462GHz 802.11a/n/ac: 5.745 ~ 5.825GHz
NUMBER OF CHANNEL	For 15.407 4 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 2 for 802.11n (HT40), 802.11ac (VHT40) 1 for 802.11ac (VHT80)
	For 15.247 (2.4GHz) 11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40) For 15.247 (5GHz) 5 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 2 for 802.11n (HT40), 802.11ac (VHT40) 1 for 802.11ac (VHT80)

MAXIMUM OUTPUT POWER	For 15.407 802.11a: 30.339mW 802.11n (HT20): 24.162mW 802.11n (HT40): 32.947mW 802.11ac (VHT80): 21.881mW For 15.247 (2.4GHz) 802.11b: 118.850mW 802.11g: 118.304mW 802.11n (HT20): 255.092mW 802.11n (HT40): 60.441mW For 15.247 (5GHz) 802.11a: 167.494mW 802.11n (HT20): 456.334mW 802.11n (HT40): 418.595mW 802.11ac (VHT80): 207.629mW
ANTENNA TYPE	Please see NOTE
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ASSOCIATED DEVICES	Adapter x1

NOTE:

1. The EUT is a 2.4GHz & 5GHz WLAN device.
2. The EUT has two different RJ45 XFRM Transformer types could be chosen and please refer the below table:

Type 1(Vendor: MINGTEK)			
Vendor P/N	Different	Vendor	Location
HN1874CG	TRANSFORMER VARIABLE COILS,DIP,350UH,HN1874CG	MINGTEK	T1
HN3674CG	TRANSFORMER VARIABLE COILS,DIP,350UH,HN3674CG	MINGTEK	T2, T3
Type 2(Vendor: MYJWD)			
Vendor P/N	Different	Vendor	Location
DG18107-1 G	TRANSFORMER,DIP,350UH,16.8*8.5*1 1.85MM,18PIN,DG18107-1 G	MYJWD	T1
DG36005-1 G	TRANSFORMER,DIP,350UH,32.7*8.5*1 1.85MM,36PIN	MYJWD	T2, T3

From the above transformer types, the worst case was found in **Type 2(Vendor: MYJWD)**. Therefore only the test data of the transformer types were recorded in this report.

3. The EUT must be supplied with a power adapter and following four different models could be chosen as following table:

No	Brand	Model No.	Spec.	Plug
1	Solytech	CAD4212CW-1	Input: 100-240V, 1.5A, 50-60Hz Output: 12V, 3.5A DC output cable (Unshielded, 1.5m)	US
2	Solytech	CAD4212LW-1	Input: 100-240V, 1.5A, 50-60Hz Output: 12V, 3.5A DC output cable (Unshielded, 1.5m)	Universal (US, EU, AU, UK)
3	Leader (LEI)	MU42-1120350-A1	Input: 100-240V, 1.5A, 50-60Hz Output: 12V, 3.5A DC output cable (Unshielded, 1.5m)	US
4	Leader (LEI)	IU42-1120350-WP	Input: 100-240V, 1.5A, 50-60Hz Output: 12V, 3.5A DC output cable (Unshielded, 1.5m)	Universal (US, EU, AU, UK)

Note: 1. Adapter 1 & 2 only different with plug.
2. For radiated emissions test, the EUT was pre-tested with above Adapter 1, Adapter 3 & Adapter 4, the worst case was found in Adapter 3. Therefore only the test data of the Adapter 3 was recorded in this report.

4. The antenna provided to the EUT, please refer to the following table:

For 2.4GHz						
Transmitter Circuit	Brand	Model	Antenna Type	Peak Gain(dBi) (Include cable loss)	Frequency range (MHz to MHz)	Connector Type
Left side Chain (1)	Galtronics	02100073-05389A1	Dipole	2.48	2400~2483.5	NA
Right side Chain (0)	Galtronics	02100073-05389A2	Dipole	3.15	2400~2483.5	NA
Front side Chain (2)	Galtronics	02100073-05389B1	Dipole	1.65	2400~2483.5	NA
For 5GHz (Band 1)						
Transmitter Circuit	Brand	Model	Antenna Type	Peak Gain(dBi) (Include cable loss)	Frequency range (MHz to MHz)	Connector Type
Left side Chain (1)	Galtronics	02102142-05389A2	Dipole	3.55	5150~5250	NA
Right side Chain (0)	Galtronics	02102142-05389A3	Dipole	4.29	5150~5250	NA
Front side Chain (2)	Galtronics	02102142-05389B1	Dipole	3.86	5150~5250	NA

For 5GHz (Band 4)						
Transmitter Circuit	Brand	Model	Antenna Type	Peak Gain(dBi) (Include cable loss)	Frequency range (MHz to MHz)	Connector Type
Left side Chain (1)	Galtronics	02102142-05389A2	Dipole	4.23	5725~5850	NA
Right side Chain (0)	Galtronics	02102142-05389A3	Dipole	4.79	5725~5850	NA
Front side Chain (2)	Galtronics	02102142-05389B1	Dipole	3.68	5725~5850	NA

Note: According to the above antennas, there are three antennas will transmit simultaneously (one is Vertical and the others are Horizontal).

5. The EUT incorporates a MIMO function without beam forming.

MODULATION MODE	TX/RX FUNCTION
802.11b	1Tx/3Rx
802.11g	1Tx (Diversity)/3Rx
802.11n (HT20)<2.4GHz>	3Tx/3Rx
802.11n (HT40) <2.4GHz>	3Tx/3Rx
802.11a	1Tx (Diversity)/3Rx
802.11n (HT20) <5GHz>	3Tx/3Rx
802.11n (HT40) <5GHz>	3Tx/3Rx
802.11ac (VHT20)	3Tx/3Rx
802.11ac (VHT40)	3Tx/3Rx
802.11ac (VHT80)	3Tx/3Rx

Note: The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

6. Conducted emission and radiated emission of the simultaneous operation (2.4GHz & 5GHz) has been evaluated and no non-compliance was found.
7. When the EUT operating in 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 23.
8. When the EUT operating in 802.11ac, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 9.
9. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



A D T

3.2 DESCRIPTION OF TEST MODES

Operated in 5150 ~ 5250MHz band:

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

CHANNEL	FREQUENCY
36	5180 MHz
40	5200 MHz
44	5220 MHz
48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

CHANNEL	FREQUENCY
38	5190 MHz
46	5230 MHz

1 channels are provided for 802.11ac (VHT80):

CHANNEL	FREQUENCY
42	5210 MHz



A D T

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	
1	√	√	√	√	Adapter 3
2	√	-	-	-	Adapter 1
3	√	-	-	-	Adapter 4

Where **PLC**: Power Line Conducted Emission

RE < 1G: Radiated Emission below 1GHz

RE ≥ 1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

Note: The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on X-plane.

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (MBPS)
802.11a	36 to 48	40	OFDM	BPSK	6

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	36 to 48	40	OFDM	BPSK	6

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6
802.11n (HT20)	36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11n (HT40)	38 to 46	38, 46	OFDM	BPSK	13.5
802.11ac (VHT80)	42	42	OFDM	BPSK	87.8

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6
802.11n (HT20)	36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11n (HT40)	38 to 46	38, 46	OFDM	BPSK	13.5
802.11ac (VHT80)	42	42	OFDM	BPSK	87.8

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
PLC	25deg. C, 60%RH	120Vac, 60Hz	Timmy Hu
RE<1G	25deg. C, 66%RH	120Vac, 60Hz	Robert Cheng
RE ³ 1G	23deg. C, 65%RH	120Vac, 60Hz	Robert Cheng
APCM	25deg. C, 60%RH	120Vac, 60Hz	Amos Chuang



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

789033 D01 General UNII Test Procedures

662911 D01 Multiple Transmitter Output

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

Note: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



A D T

3.4 DUTY CYCLE OF TEST SIGNAL


Duty cycle of test signal is > 98 %, duty factor is not required.

802.11a: Duty cycle = 2.060 ms/2.078 ms = 0.991

802.11n (HT20): Duty cycle = 1.921 ms/1.938 ms = 0.991

802.11n (HT40): Duty cycle = 943.750 us/960.625 us = 0.982

802.11ac (VHT80): Duty cycle = 467.888 us/477.188 us = 0.981

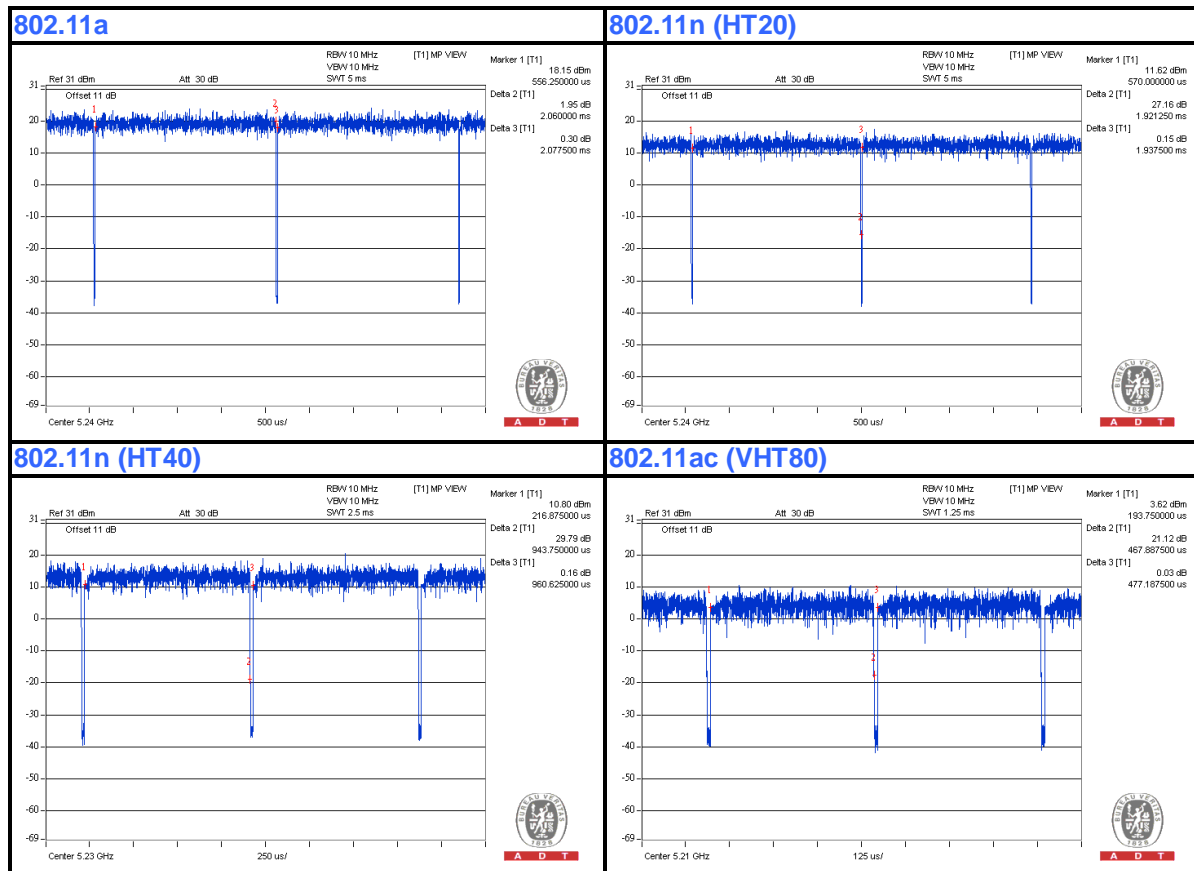



A D T

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP32LA	FSLB32S	FCC DoC
2	NOTEBOOK COMPUTER	DELL	PP32LA	GSLB32S	FCC DoC
3	External Hard Drive (For Conducted Emission test)	WD	WDBACW0010H BK-SESN	WCAV5R678284	FCC DoC
	External Hard Drive (For Other test items)	WD	WDBACW0010H BK-SESN	WXK1A51E5819	FCC DoC
4	USB Flash Drive (For Conducted Emission test)	SanDisk	SDCZ2-512-A10	5485439362	FCC DoC
	iPod shuffle (For Other test items)	Apple	MC749TA/A	CC4DMFJUDFD M	NA
5	HUB	ZyXEL	ES-116P	S060H02000215	FCC DoC

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	UTP cable, 10m
2	UTP cable, 10m
3	USB cable, 1.5m (For Conducted Emission test)
	USB cable, 0.5m (For Other test items)
4	NA (For Conducted Emission test)
	USB cable, 0.1m (For Other test items)
5	UTP cable, 10m

NOTE: All power cords of the above support units are non shielded (1.8m).


3.6 CONFIGURATION OF SYSTEM UNDER TEST

For Conducted Emission test:

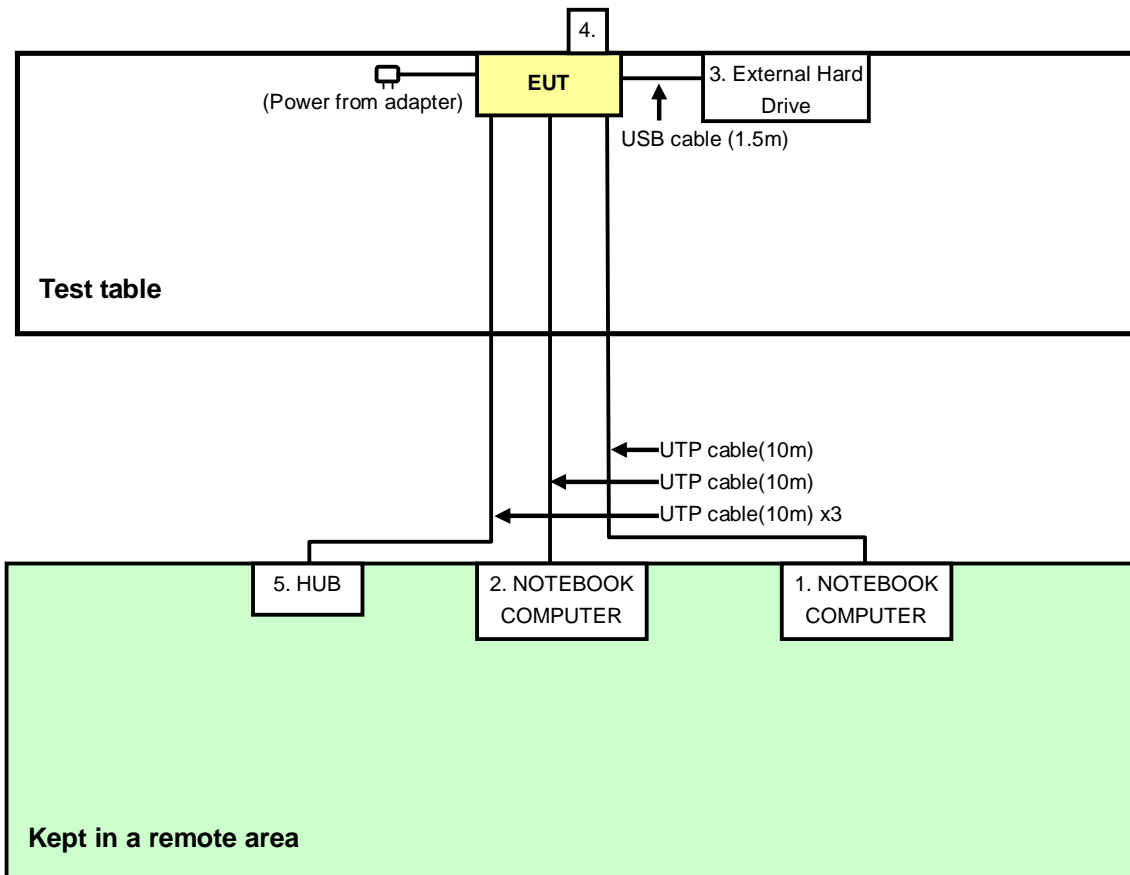

Note: Support unit 4 is USB Flash Drive

For other test items:

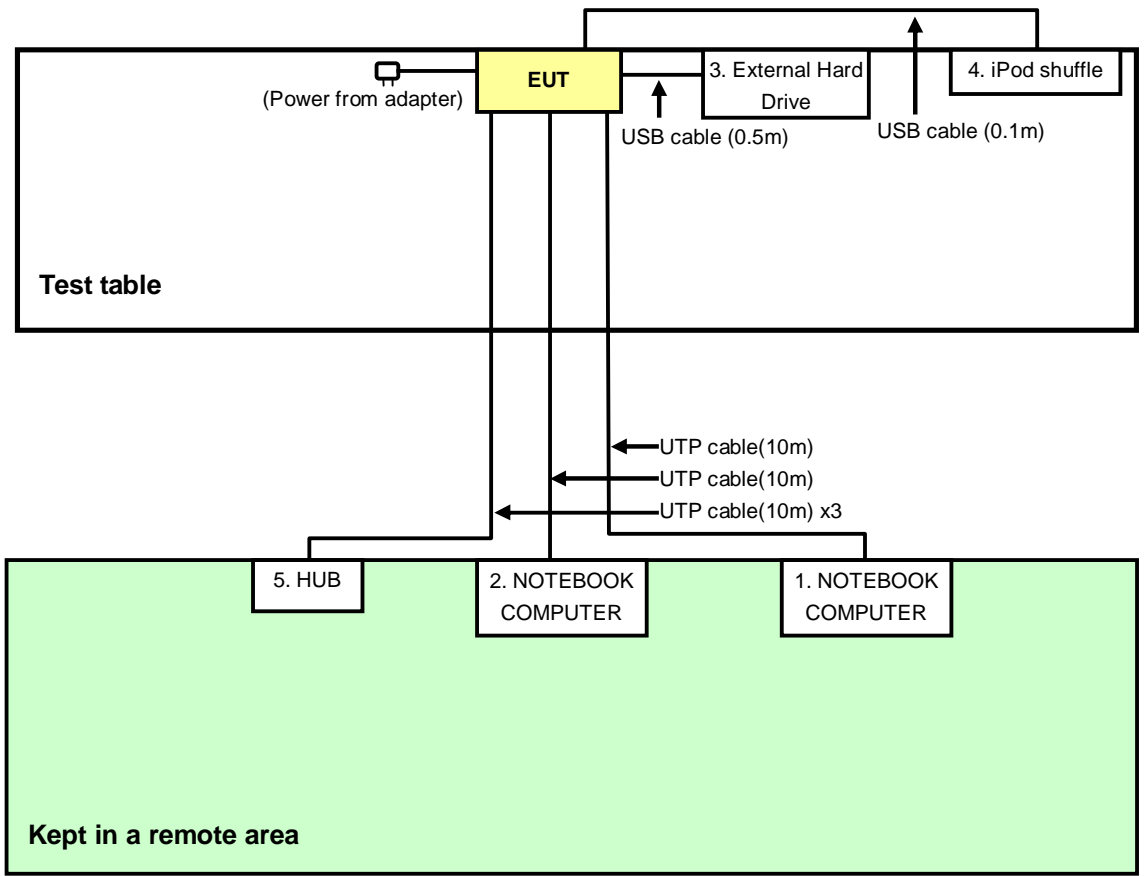



A D T

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	100287	Feb. 29, 2012	Feb. 28, 2013
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK 8127	8127-523	Sep. 19, 2012	Sep. 20, 2013
Line-Impedance Stabilization Network (for Peripheral) ROHDE & SCHWARZ	ESH3-Z5	848773/004	Oct. 29, 2012	Oct. 28, 2013
RF Cable (JYEBAO)	5DFB	COACAB-002	Aug. 05, 2012	Aug. 04, 2013
50 ohms Terminator	50	3	Oct. 23, 2012	Oct. 22, 2013
Software ADT	BV ADT_Cond_V7.3.7 .3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.
4. Tested Date: Jan. 02, 2013

4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- b. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission level under (Limit – 20dB) was not recorded.


NOTE:

1. The resolution bandwidth of test receiver is 9kHz for Quasi-peak detection (QP) & Average detection (AV).

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

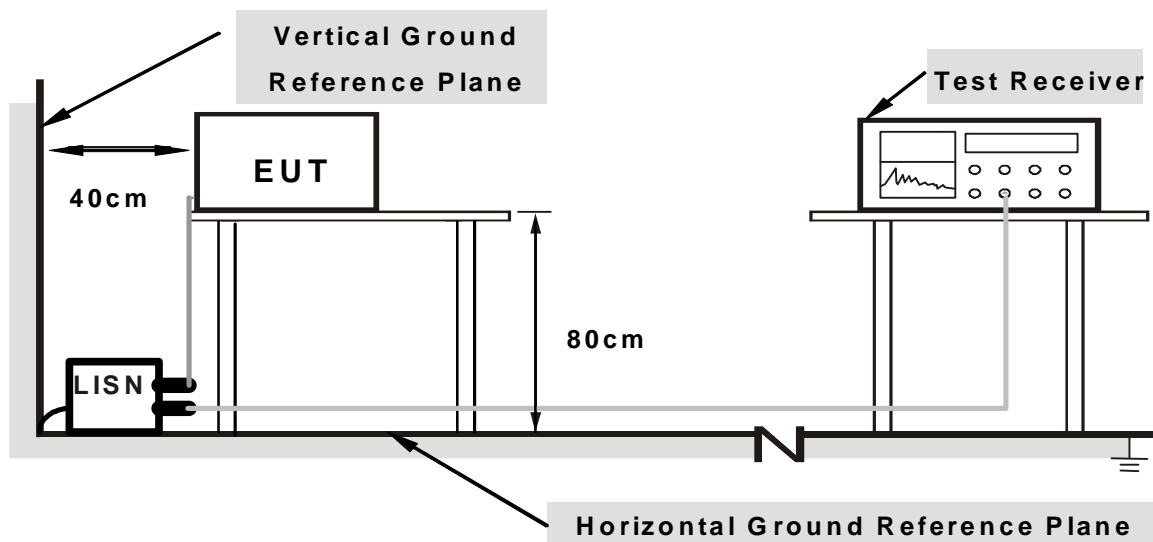

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

1. Connect the EUT with the support unit 1 (Notebook Computer) which is placed on a testing table.
2. The communication partner run test program “MTool V1.0.0.0.10.exe” to enable EUT under transmission/receiving condition continuously at specific channel frequency.


4.1.7 TEST RESULTS (MODE 1)

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	----------	--------------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.15000	0.10	59.89	48.84	59.99	48.94	66.00	56.00	-6.01
2	0.18906	0.11	52.86	36.42	52.97	36.53	64.08	54.08	-11.11	-17.55
3	0.25156	0.12	44.51	26.04	44.63	26.16	61.71	51.71	-17.07	-25.54
4	0.50000	0.16	36.68	33.49	36.84	33.65	56.00	46.00	-19.16	-12.35
5	5.00000	0.36	37.95	31.87	38.31	32.23	56.00	46.00	-17.69	-13.77
6	8.16797	0.49	40.33	35.38	40.82	35.87	60.00	50.00	-19.18	-14.13

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

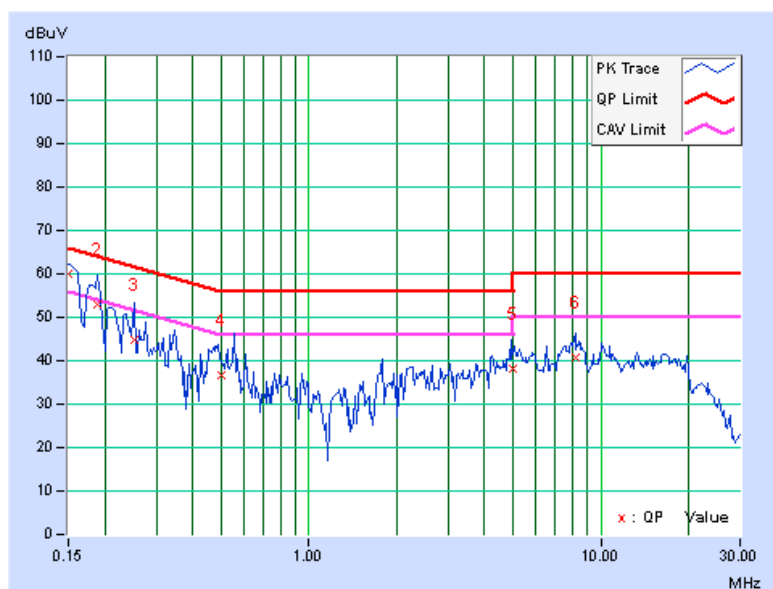


PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	-------------	--------------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.15000	0.14	59.67	49.26	59.81	49.40	66.00	56.00	-6.19
2	0.18516	0.15	54.23	43.93	54.38	44.08	64.25	54.25	-9.87	-10.17
3	0.23984	0.16	45.83	35.56	45.99	35.72	62.10	52.10	-16.11	-16.38
4	0.31797	0.17	38.64	21.43	38.81	21.60	59.76	49.76	-20.95	-28.16
5	0.48984	0.19	40.55	36.66	40.74	36.85	56.17	46.17	-15.43	-9.32
6	5.23047	0.39	38.97	32.38	39.36	32.77	60.00	50.00	-20.64	-17.23

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

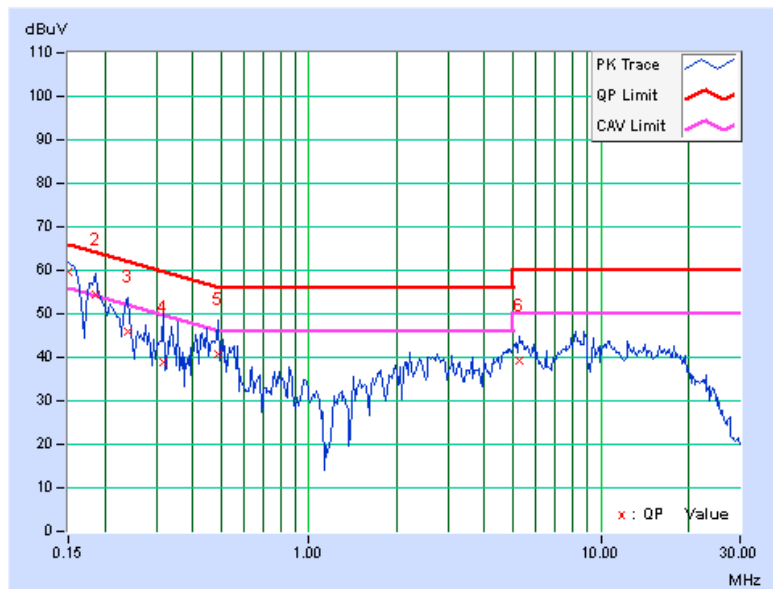


4.1.8 TEST RESULTS (MODE 2)

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.16172	0.10	50.73	44.33	50.83	44.43	65.38	55.38	-14.55
2	0.18906	0.11	44.08	31.67	44.19	31.78	64.08	54.08	-19.89	-22.30
3	0.25547	0.12	34.91	27.10	35.03	27.22	61.58	51.58	-26.54	-24.35
4	0.49766	0.16	34.47	22.73	34.63	22.89	56.04	46.04	-21.41	-23.15
5	0.67734	0.17	25.48	15.61	25.65	15.78	56.00	46.00	-30.35	-30.22
6	6.51563	0.42	32.08	27.84	32.50	28.26	60.00	50.00	-27.50	-21.74

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

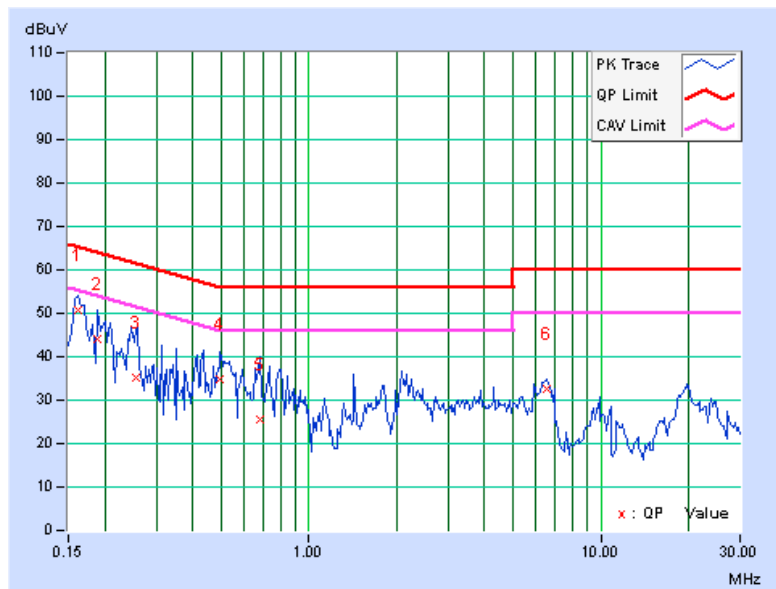


PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	-------------	--------------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.15781	0.15	47.76	39.20	47.91	39.35	65.58	55.58	-17.67
2	0.18125	0.15	39.74	23.24	39.89	23.39	64.43	54.43	-24.54	-31.04
3	0.22812	0.16	38.95	30.29	39.11	30.45	62.52	52.52	-23.41	-22.07
4	0.29844	0.17	34.76	23.99	34.93	24.16	60.29	50.29	-25.36	-26.13
5	0.49766	0.19	33.65	25.40	33.84	25.59	56.04	46.04	-22.19	-20.44
6	6.44922	0.43	37.02	31.87	37.45	32.30	60.00	50.00	-22.55	-17.70

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

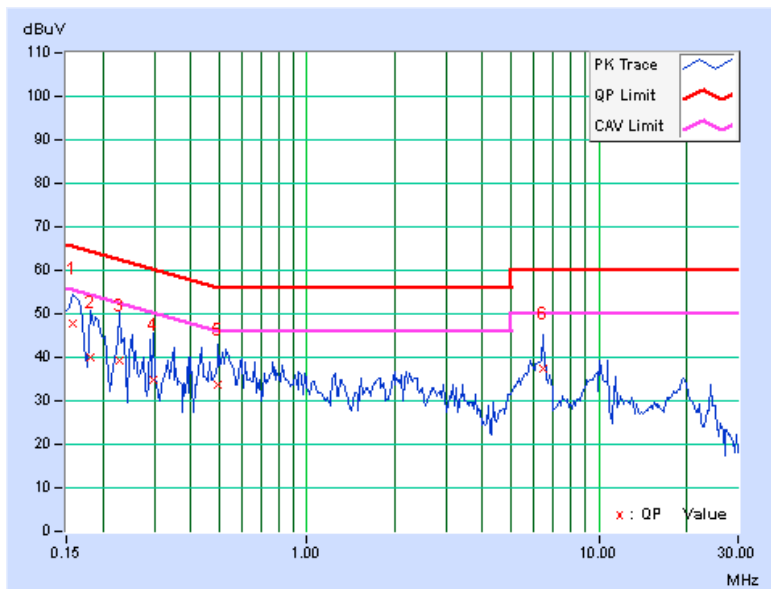


4.1.9 TEST RESULTS (MODE 3)

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	----------	--------------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.16562	0.10	55.40	45.90	55.50	46.00	65.18	55.18	-9.68
2	0.20078	0.11	49.17	35.87	49.28	35.98	63.58	53.58	-14.30	-17.60
3	0.51719	0.16	40.54	35.08	40.70	35.24	56.00	46.00	-15.30	-10.76
4	0.77891	0.17	34.76	25.94	34.93	26.11	56.00	46.00	-21.07	-19.89
5	1.31250	0.20	35.88	28.90	36.08	29.10	56.00	46.00	-19.92	-16.90
6	2.13281	0.24	37.75	32.67	37.99	32.91	56.00	46.00	-18.01	-13.09

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

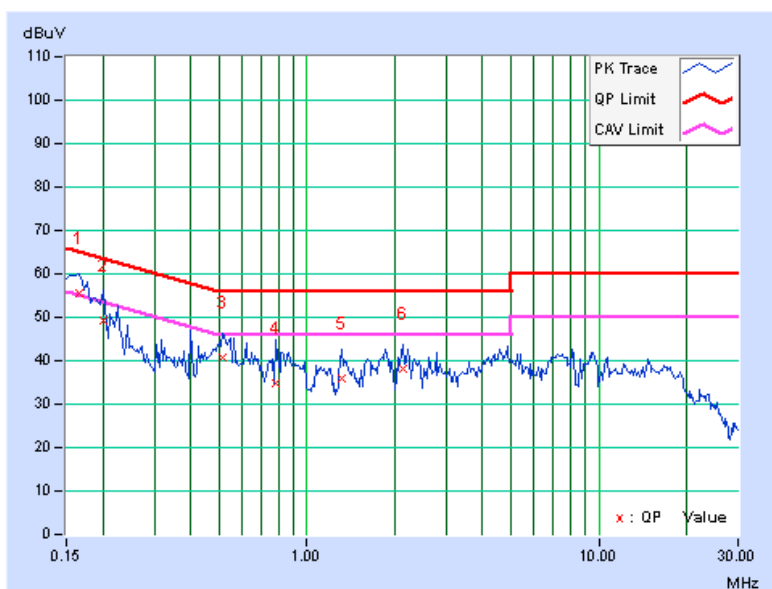


PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	-------------	--------------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.15391	0.15	55.18	40.34	55.33	40.49	65.79	55.79	-10.46
2	0.16953	0.15	55.10	39.71	55.25	39.86	64.98	54.98	-9.74	-15.13
3	0.18906	0.15	51.91	39.46	52.06	39.61	64.08	54.08	-12.02	-14.47
4	0.33750	0.18	32.39	23.61	32.57	23.79	59.26	49.26	-26.70	-25.48
5	0.40391	0.19	31.93	20.70	32.12	20.89	57.77	47.77	-25.65	-26.88
6	0.50000	0.20	41.70	35.86	41.90	36.06	56.00	46.00	-14.10	-9.94
7	7.87500	0.47	36.11	31.19	36.58	31.66	60.00	50.00	-23.42	-18.34

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

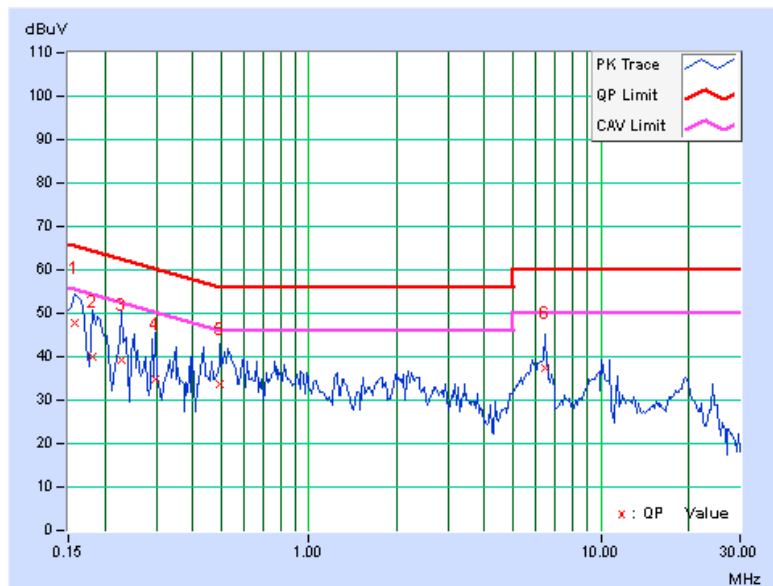



A D T

4.2 RADIATED EMISSION AND BANDEGE MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION AND BANDEGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

APPLICABLE TO	LIMIT	
-	FIELD STRENGTH AT 3m (dBμV/m)	
	PK	AV
	74	54
√	EIRP LIMIT (dBm)	EQUIVALENT FIELD STRENGTH AT 3m (dBμV/m)
	PK	PK
	-27	68.3

NOTE:

1. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$



A D T

4.2.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250254	July 09, 2012	July 08, 2013
Pre-Selector Agilent	N9039A	MY46520311	July 09, 2012	July 08, 2013
Signal Generator Agilent	N5181A	MY49060517	July 09, 2012	July 08, 2013
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 14, 2012	Nov. 13, 2013
Pre-Amplifier Agilent	8449B	3008A02578	June 26, 2012	June 25, 2013
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 14, 2012	Nov. 13, 2013
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Apr. 09, 2012	Apr. 08, 2013
Horn_Antenna AISI	AIH.8018	0000320091110	Nov. 19, 2012	Nov. 18, 2013
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 12, 2012	Oct. 11, 2013
RF Cable	NA	RF104-201 RF104-203 RF104-204	Dec. 25, 2012	Dec. 24, 2013
RF Cable	NA	CHGCAB_001	Oct. 06, 2012	Oct. 05, 2013
Software	ADT_Radiated _V8.7.05	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
- 5 The VCCI Site Registration No. is G-137.
- 6 The CANADA Site Registration No. is IC 7450H-2.
- 7 Tested Date: Jan. 05, 2013

4.2.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.2.5 DEVIATION FROM TEST STANDARD

No deviation

4.2.6 TEST SETUP

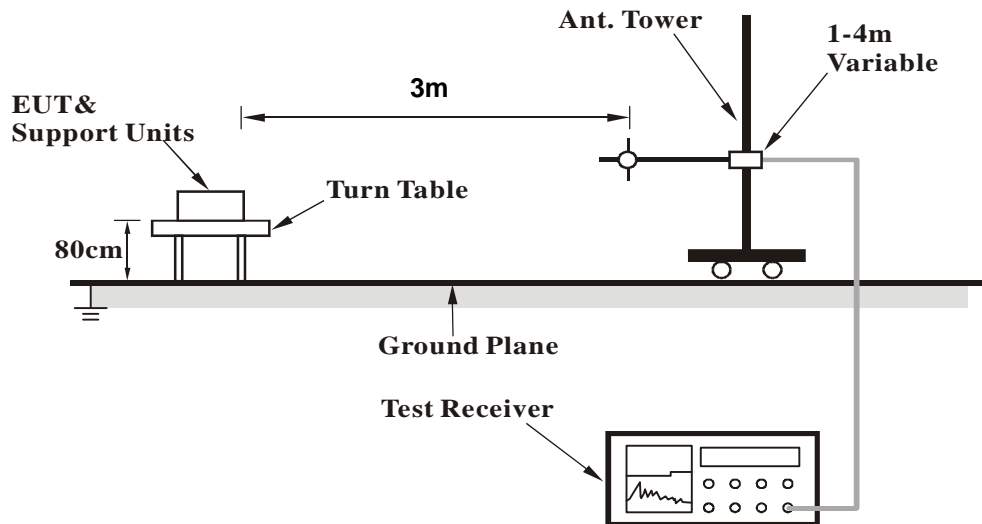

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.7 EUT OPERATING CONDITION

Same as 4.1.6



4.2.8 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

802.11a

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	73.80	27.5 QP	40.0	-12.5	1.10 H	134	15.97	11.52
2	106.71	29.0 QP	43.5	-14.5	1.40 H	310	18.20	10.78
3	233.60	37.0 QP	46.0	-9.0	1.11 H	210	24.38	12.63
4	270.24	26.9 QP	46.0	-19.1	1.24 H	145	12.82	14.12
5	356.60	28.3 QP	46.0	-17.7	1.45 H	240	11.56	16.75
6	533.00	41.4 QP	46.0	-4.6	1.74 H	147	20.27	21.16

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	48.00	36.3 QP	40.0	-3.8	1.25 V	38	22.12	14.13
2	110.40	27.9 QP	43.5	-15.6	1.45 V	84	16.64	11.28
3	232.00	27.0 QP	46.0	-19.0	1.38 V	68	14.40	12.56
4	358.30	24.9 QP	46.0	-21.1	1.35 V	67	8.13	16.79
5	530.00	40.0 QP	46.0	-6.0	1.75 V	71	18.91	21.09
6	589.60	29.5 QP	46.0	-16.5	1.35 V	85	7.10	22.43

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

ABOVE 1GHz DATA

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5100.00	60.4 PK	74.0	-13.6	1.00 H	173	18.27	42.13
2	5100.00	49.9 AV	54.0	-4.1	1.00 H	173	7.77	42.13
3	*5180.00	101.4 PK			1.00 H	173	59.00	42.40
4	*5180.00	92.1 AV			1.00 H	173	49.70	42.40
5	5395.80	60.3 PK	74.0	-13.7	1.00 H	167	17.69	42.61
6	5395.80	48.7 AV	54.0	-5.3	1.00 H	167	6.09	42.61
7	#10360.00	55.5 PK	68.3	-12.8	1.00 H	5	6.29	49.21
8	15540.00	64.0 PK	74.0	-10.0	1.00 H	143	8.90	55.10
9	15540.00	50.1 AV	54.0	-3.9	1.00 H	143	-5.00	55.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5100.00	63.3 PK	74.0	-10.7	1.00 V	85	21.17	42.13
2	5100.00	53.3 AV	54.0	-0.7	1.00 V	85	11.17	42.13
3	*5180.00	110.9 PK			1.00 V	94	68.50	42.40
4	*5180.00	101.2 AV			1.00 V	94	58.80	42.40
5	5395.80	58.9 PK	74.0	-15.1	1.00 V	222	16.29	42.61
6	5395.80	48.2 AV	54.0	-5.8	1.00 V	222	5.59	42.61
7	#10360.00	55.9 PK	68.3	-12.4	1.00 V	44	6.69	49.21
8	15540.00	64.5 PK	74.0	-9.5	1.00 V	138	9.40	55.10
9	15540.00	50.5 AV	54.0	-3.5	1.00 V	138	-4.60	55.10

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5121.00	60.0 PK	74.0	-14.0	1.01 H	165	17.80	42.20
2	5121.00	48.5 AV	54.0	-5.5	1.01 H	165	6.30	42.20
3	*5200.00	102.8 PK			1.00 H	165	60.33	42.47
4	*5200.00	93.2 AV			1.00 H	165	50.73	42.47
5	#10400.00	56.0 PK	68.3	-12.3	1.00 H	13	7.17	48.83
6	15600.00	63.7 PK	74.0	-10.3	1.00 H	155	8.73	54.97
7	15600.00	50.7 AV	54.0	-3.3	1.00 H	155	-4.27	54.97

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5121.00	64.3 PK	74.0	-9.7	1.01 V	47	22.10	42.20
2	5121.00	53.5 AV	54.0	-0.5	1.01 V	47	11.30	42.20
3	*5200.00	111.9 PK			1.01 V	47	69.43	42.47
4	*5200.00	102.5 AV			1.01 V	47	60.03	42.47
5	#10400.00	55.2 PK	68.3	-13.1	1.00 V	31	6.37	48.83
6	15600.00	64.4 PK	74.0	-9.6	1.00 V	150	9.43	54.97
7	15600.00	50.5 AV	54.0	-3.5	1.00 V	150	-4.47	54.97

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	102.7 PK			1.00 H	158	60.19	42.51
2	*5240.00	93.0 AV			1.00 H	158	50.49	42.51
3	5350.00	60.2 PK	74.0	-13.8	1.00 H	74	17.61	42.59
4	5350.00	47.6 AV	54.0	-6.4	1.00 H	74	5.01	42.59
5	#10480.00	55.8 PK	68.3	-12.5	1.00 H	13	6.41	49.39
6	15720.00	63.9 PK	74.0	-10.1	1.00 H	135	9.20	54.70
7	15720.00	50.9 AV	54.0	-3.1	1.00 H	135	-3.80	54.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	112.5 PK			1.01 V	46	69.99	42.51
2	*5240.00	102.5 AV			1.01 V	46	59.99	42.51
3	5350.00	60.9 PK	74.0	-13.1	1.00 V	83	18.31	42.59
4	5350.00	48.1 AV	54.0	-5.9	1.00 V	83	5.51	42.59
5	#10480.00	55.0 PK	68.3	-13.3	1.00 V	11	5.61	49.39
6	15720.00	64.4 PK	74.0	-9.6	1.00 V	145	9.70	54.70
7	15720.00	50.5 AV	54.0	-3.5	1.00 V	145	-4.20	54.70

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

802.11n (HT20)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5097.00	61.7 PK	74.0	-12.3	1.00 H	183	19.57	42.13
2	5097.00	51.9 AV	54.0	-2.1	1.00 H	183	9.77	42.13
3	*5180.00	111.3 PK			1.00 H	157	68.90	42.40
4	*5180.00	101.1 AV			1.00 H	157	58.70	42.40
5	#10360.00	54.3 PK	68.3	-14.0	1.00 H	1	5.09	49.21
6	15540.00	65.6 PK	74.0	-8.4	1.07 H	17	10.50	55.10
7	15540.00	51.3 AV	54.0	-2.7	1.07 H	17	-3.80	55.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5097.00	63.4 PK	74.0	-10.6	1.00 V	92	21.27	42.13
2	5097.00	53.5 AV	54.0	-0.5	1.00 V	92	11.37	42.13
3	*5180.00	111.2 PK			1.00 V	93	68.80	42.40
4	*5180.00	101.8 AV			1.00 V	93	59.40	42.40
5	#10360.00	56.2 PK	68.3	-12.1	1.00 V	68	6.99	49.21
6	15540.00	63.4 PK	74.0	-10.6	1.00 V	143	8.30	55.10
7	15540.00	50.4 AV	54.0	-3.6	1.00 V	143	-4.70	55.10

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5118.80	60.8 PK	74.0	-13.2	1.04 H	182	18.61	42.19
2	5118.80	50.6 AV	54.0	-3.4	1.04 H	182	8.41	42.19
3	*5200.00	111.0 PK			1.04 H	146	68.53	42.47
4	*5200.00	100.1 AV			1.04 H	146	57.63	42.47
5	#10400.00	54.3 PK	68.3	-14.0	1.00 H	20	5.47	48.83
6	15600.00	65.3 PK	74.0	-8.7	1.04 H	14	10.33	54.97
7	15600.00	51.2 AV	54.0	-2.8	1.04 H	14	-3.77	54.97

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5118.80	61.7 PK	74.0	-12.3	1.00 V	88	19.51	42.19
2	5118.80	51.8 AV	54.0	-2.2	1.00 V	88	9.61	42.19
3	*5200.00	110.1 PK			1.00 V	88	67.63	42.47
4	*5200.00	100.4 AV			1.00 V	88	57.93	42.47
5	#10400.00	56.5 PK	68.3	-11.8	1.00 V	58	7.67	48.83
6	15600.00	62.8 PK	74.0	-11.2	1.00 V	147	7.83	54.97
7	15600.00	50.3 AV	54.0	-3.7	1.00 V	147	-4.67	54.97

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	110.4 PK			1.00 H	138	67.89	42.51
2	*5240.00	99.6 AV			1.00 H	138	57.09	42.51
3	5350.00	60.6 PK	74.0	-13.4	1.09 H	168	18.01	42.59
4	5350.00	50.5 AV	54.0	-3.5	1.09 H	168	7.91	42.59
5	#10480.00	53.8 PK	68.3	-14.5	1.00 H	10	4.41	49.39
6	15720.00	64.3 PK	74.0	-9.7	1.00 H	23	9.60	54.70
7	15720.00	50.4 AV	54.0	-3.6	1.00 H	23	-4.30	54.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	109.8 PK			1.00 V	88	67.29	42.51
2	*5240.00	100.6 AV			1.00 V	88	58.09	42.51
3	5350.00	59.1 PK	74.0	-14.9	1.00 V	88	16.51	42.59
4	5350.00	49.0 AV	54.0	-5.0	1.00 V	88	6.41	42.59
5	#10480.00	56.5 PK	68.3	-11.8	1.00 V	49	7.11	49.39
6	15720.00	63.0 PK	74.0	-11.0	1.00 V	155	8.30	54.70
7	15720.00	50.6 AV	54.0	-3.4	1.00 V	155	-4.10	54.70

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT40)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.4 PK	74.0	-14.6	1.00 H	144	17.10	42.30
2	5150.00	49.5 AV	54.0	-4.5	1.00 H	144	7.20	42.30
3	*5190.00	109.1 PK			1.00 H	153	66.66	42.44
4	*5190.00	98.8 AV			1.00 H	153	56.36	42.44
5	#10380.00	51.2 PK	68.3	-17.1	1.00 H	10	2.18	49.02
6	15570.00	64.4 PK	74.0	-9.6	1.00 H	14	9.36	55.04
7	15570.00	51.2 AV	54.0	-2.8	1.00 H	14	-3.84	55.04

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.9 PK	74.0	-8.1	1.00 V	83	23.60	42.30
2	5150.00	51.9 AV	54.0	-2.1	1.00 V	83	9.60	42.30
3	*5190.00	108.0 PK			1.00 V	90	65.56	42.44
4	*5190.00	98.3 AV			1.00 V	90	55.86	42.44
5	#10380.00	54.7 PK	68.3	-13.6	1.00 V	25	5.68	49.02
6	15570.00	64.7 PK	74.0	-9.3	1.00 V	131	9.66	55.04
7	15570.00	50.9 AV	54.0	-3.1	1.00 V	131	-4.14	55.04

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5147.60	60.0 PK	74.0	-14.0	1.01 H	155	17.71	42.29
2	5147.60	50.0 AV	54.0	-4.0	1.01 H	155	7.71	42.29
3	*5230.00	109.3 PK			1.00 H	155	66.80	42.50
4	*5230.00	99.2 AV			1.00 H	155	56.70	42.50
5	5350.00	58.5 PK	74.0	-15.5	1.01 H	69	15.91	42.59
6	5350.00	48.4 AV	54.0	-5.6	1.01 H	69	5.81	42.59
7	#10460.00	51.3 PK	68.3	-17.0	1.00 H	15	2.05	49.25
8	15690.00	64.5 PK	74.0	-9.5	1.00 H	18	9.83	54.67
9	15690.00	51.0 AV	54.0	-3.0	1.00 H	18	-3.67	54.67

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5147.60	62.0 PK	74.0	-12.0	1.00 V	90	19.71	42.29
2	5147.60	51.9 AV	54.0	-2.1	1.00 V	90	9.61	42.29
3	*5230.00	110.1 PK			1.01 V	90	67.60	42.50
4	*5230.00	100.3 AV			1.01 V	90	57.80	42.50
5	5350.00	58.6 PK	74.0	-15.4	1.01 V	82	16.01	42.59
6	5350.00	48.5 AV	54.0	-5.5	1.01 V	82	5.91	42.59
7	#10460.00	54.0 PK	68.3	-14.3	1.00 V	33	4.75	49.25
8	15690.00	63.2 PK	74.0	-10.8	1.00 V	127	8.53	54.67
9	15690.00	51.0 AV	54.0	-3.0	1.00 V	127	-3.67	54.67

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT80)

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.5 PK	74.0	-10.5	1.00 H	158	21.20	42.30
2	5150.00	50.9 AV	54.0	-3.1	1.00 H	158	8.60	42.30
3	*5210.00	102.7 PK			1.00 H	158	60.22	42.48
4	*5210.00	92.1 AV			1.00 H	158	49.62	42.48
5	#10420.00	51.5 PK	68.3	-16.8	1.00 H	28	2.53	48.97
6	15630.00	63.1 PK	74.0	-10.9	1.00 H	12	8.23	54.87
7	15630.00	50.0 AV	54.0	-4.0	1.00 H	12	-4.87	54.87

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.4 PK	74.0	-10.6	1.00 V	97	21.10	42.30
2	5150.00	51.8 AV	54.0	-2.2	1.00 V	97	9.50	42.30
3	*5210.00	103.3 PK			1.00 V	90	60.82	42.48
4	*5210.00	92.3 AV			1.00 V	90	49.82	42.48
5	#10420.00	54.1 PK	68.3	-14.2	1.00 V	28	5.13	48.97
6	15630.00	63.0 PK	74.0	-11.0	1.00 V	142	8.13	54.87
7	15630.00	51.3 AV	54.0	-2.7	1.00 V	142	-3.57	54.87

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

4.3 TRANSMIT POWER MEASUREMENT

4.3.1 LIMITS OF TRANSMIT POWER MEASUREMENT

Frequency Band	Limit
5.15 – 5.25GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB
5.25 – 5.35GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.47 – 5.725GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.725 – 5.825GHz	The lesser of 1W (30dBm) or 17dBm + 10logB

NOTE: Where B is the 26dB emission bandwidth in MHz.

Per KDB 662911 D01 Multiple Transmitter Output v01r02 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any NANT;

Array Gain = 5 log(NANT/NSS) dB or 3 dB, whichever is less for 20-MHz channel widths with NANT ≥ 5.

For power measurements on all other devices: Array Gain = 10 log(NANT/NSS) dB.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Jan. 07, 2013



A D T

4.3.3 TEST PROCEDURE

FOR POWER OUTPUT MEASUREMENT

Follow FCC KDB 789033 UNII test procedure:

Method SA-1

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Number of points in sweep ≥ 2 Span / RBW.
5. Sweep time = auto.
6. Set trigger to free run (duty cycle ≥ 98 percent) ; Set video trigger (duty cycle < 98 percent)
7. Detector = RMS.
8. Trace average at least 100 traces in power averaging mode
9. Compute power by integrating the spectrum across the 26 dB EBW of the signal.


FOR 26dB OCCUPIED BANDWIDTH

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW $>$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



4.3.7 TEST RESULTS

POWER OUTPUT:

802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)	POWER LIMIT (dBm)	PASS/FAIL
36	5180	28.576	14.56	17	PASS
40	5200	30.339	14.82	17	PASS
48	5240	29.309	14.67	17	PASS

802.11n (HT20)

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
36	5180	9.38	8.66	9.11	24.162	13.83	17	PASS
40	5200	9.17	8.46	8.89	23.020	13.62	17	PASS
48	5240	9.12	8.37	8.97	22.926	13.60	17	PASS

802.11n (HT40)

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
38	5190	10.46	9.90	10.05	31.005	14.91	17	PASS
46	5230	10.80	10.09	10.30	32.947	15.18	17	PASS

802.11ac (VHT80)

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
42	5210	8.60	8.35	8.92	21.881	13.40	17	PASS



A D T

26dB OCCUPIED BANDWIDTH:

802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)
36	5180	19.71
40	5200	19.78
48	5240	19.53

802.11n (HT20)

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)		
		CHAIN 0	CHAIN 1	CHAIN 2
36	5180	19.69	19.95	19.89
40	5200	19.70	19.80	19.78
48	5240	19.54	19.70	19.57

802.11n (HT40)

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)		
		CHAIN 0	CHAIN 1	CHAIN 2
38	5190	40.50	40.04	40.28
46	5230	40.56	40.18	40.23

802.11ac (VHT80)

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)		
		CHAIN 0	CHAIN 1	CHAIN 2
42	5210	82.07	81.37	81.65



A D T

4.4 PEAK POWER SPECTRAL DENSITY MEASUREMENT

4.4.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

Frequency Band	Limit
5.15 ~ 5.25GHz	4dBm
5.25 ~ 5.35GHz	11dBm
5.47 ~ 5.725GHz	11dBm
5.725 ~ 5.825GHz	17dBm

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Jan. 07, 2013

4.4.3 TEST PROCEDURES

Using method SA-1


Set span to encompass the entire emission bandwidth (EBW) of the signal.

1. Set RBW = 30 KHz, Set VBW \geq 1 MHz, Detector = RMS
2. Set Channel power measure = 1MHz
3. Sweep time = auto, trigger set to "free run".
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP





A D T

4.4.6 EUT OPERATING CONDITIONS

Same as 4.3.6

4.4.7 TEST RESULTS

802.11a

CHANNEL	FREQUENCY (MHz)	PSD (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
36	5180	3.70	4	PASS
40	5200	3.96	4	PASS
48	5240	3.85	4	PASS

802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	PSD (dBm)			TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS/FAIL
		CHAIN 0	CHAIN 1	CHAIN 2			
36	5180	-1.84	-2.01	-1.70	2.92	3.06	PASS
40	5200	-1.42	-2.85	-1.79	2.79	3.06	PASS
48	5240	-0.94	-3.79	-1.86	2.73	3.06	PASS

- NOTE:**
- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
 - Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2] = 6.94\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $4 - (6.94 - 6) = 3.06\text{dBm}$.

802.11n (HT40)

CHANNEL	FREQUENCY (MHz)	PSD (dBm)			TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS/FAIL
		CHAIN 0	CHAIN 1	CHAIN 2			
38	5190	-3.51	-3.95	-3.69	1.06	3.06	PASS
46	5230	-2.90	-4.29	-3.02	1.41	3.06	PASS

- NOTE:**
- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
 - Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2] = 6.94\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $4 - (6.94 - 6) = 3.06\text{dBm}$.



A D T

802.11ac (VHT80)

CHANNEL	FREQUENCY (MHz)	PSD (dBm)			TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS/FAIL
		CHAIN 0	CHAIN 1	CHAIN 2			
42	5210	-8.00	-8.63	-7.75	-3.34	3.06	PASS

- NOTE:**
1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
 2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2] = 6.94\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $4 - (6.94 - 6) = 3.06\text{dBm}$.

4.5 PEAK POWER EXCURSION MEASUREMENT

4.5.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

Shall not exceed 13 dB

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Jan. 07, 2013


4.5.3 TEST PROCEDURE

1. Set RBW = 1 MHz, VBW \geq 3 MHz, Detector = peak.
2. Trace mode = max-hold. Allow the sweeps to continue until the trace stabilizes.
3. Use the peak search function to find the peak of the spectrum.
4. Measure the PPSD.
5. Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



4.5.7 TEST RESULTS

802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK VALUE (dBm)	PPSD (dBm)	PEAK EXCURSION (dB)	LIMIT (dB)	PASS/FAIL
36	5180	11.87	3.70	8.17	13	PASS
40	5200	12.12	3.96	8.16	13	PASS
48	5240	11.99	3.85	8.14	13	PASS

802.11n (HT20)

CHAN.	CHAN. FREQ. (MHz)	PEAK VALUE (dBm)			PPSD (dBm)			PEAK EXCURSION (dB)			LIMIT (dB)	PASS/FAIL
		CHAIN 0	CHAIN 1	CHAIN 2	CHAIN 0	CHAIN 1	CHAIN 2	CHAIN 0	CHAIN 1	CHAIN 2		
36	5180	7.44	7.92	7.75	-1.84	-2.01	-1.70	9.28	9.93	9.45	13	PASS
40	5200	6.92	8.19	8.10	-1.42	-2.85	-1.79	8.34	11.04	9.89	13	PASS
48	5240	7.69	8.38	8.80	-0.94	-3.79	-1.86	8.63	12.17	10.66	13	PASS

802.11n (HT40)

CHAN.	CHAN. FREQ. (MHz)	PEAK VALUE (dBm)			PPSD (dBm)			PEAK EXCURSION (dB)			LIMIT (dB)	PASS/FAIL
		CHAIN 0	CHAIN 1	CHAIN 2	CHAIN 0	CHAIN 1	CHAIN 2	CHAIN 0	CHAIN 1	CHAIN 2		
38	5190	5.99	6.25	6.28	-3.51	-3.95	-3.69	9.50	10.20	9.97	13	PASS
46	5230	5.91	6.65	6.74	-2.90	-4.29	-3.02	8.81	10.94	9.76	13	PASS

802.11ac (VHT80)

CHAN.	CHAN. FREQ. (MHz)	PEAK VALUE (dBm)			PPSD (dBm)			PEAK EXCURSION (dB)			LIMIT (dB)	PASS/FAIL
		CHAIN 0	CHAIN 1	CHAIN 2	CHAIN 0	CHAIN 1	CHAIN 2	CHAIN 0	CHAIN 1	CHAIN 2		
42	5210	0.98	2.33	2.25	-8.00	-8.63	-7.75	8.98	10.96	10.00	13	PASS

4.6 FREQUENCY STABILITY

4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency of the carrier signal shall be maintained within band of operation

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Jan. 07, 2013


4.6.3 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

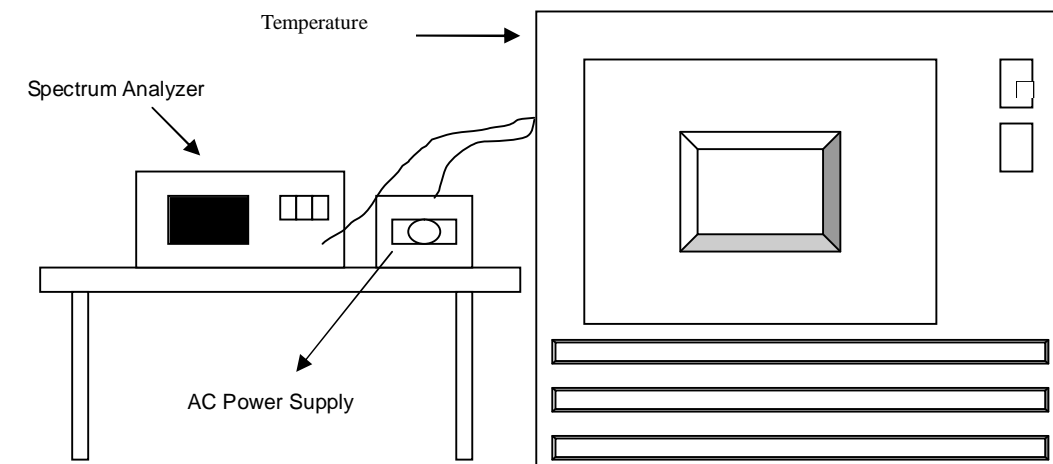

4.6.6 EUT OPERATING CONDITION

Set the EUT transmit at un-modulation mode to test frequency stability.



A D T

4.6.7 TEST RESULTS

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5240MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	ppm	(MHz)	ppm	(MHz)	ppm	(MHz)	ppm
50	120	5240.0183	3.4924	5240.0199	3.7977	5240.0219	4.1794	5240.0186	3.5496
40	120	5239.9815	-3.5305	5239.986	-2.6718	5239.9847	-2.9198	5239.9913	-1.6603
30	120	5240.0136	2.5954	5240.0076	1.4504	5240.0073	1.3931	5240.0148	2.8244
20	120	5240.005	0.9542	5240.0067	1.2786	5240.0057	1.0878	5240.0034	0.6489
10	120	5239.9915	-1.6221	5239.996	-0.7634	5239.9956	-0.8397	5239.9905	-1.8130
0	120	5239.9955	-0.8588	5240.0037	0.7061	5240.002	0.3817	5240.0048	0.9160
-10	120	5239.9975	-0.4771	5239.9928	-1.3740	5239.9964	-0.6870	5239.9944	-1.0687
-20	120	5239.9777	-4.2557	5239.9753	-4.7137	5239.9808	-3.6641	5239.9733	-5.0954
-30	120	5240.0203	3.8740	5240.0236	4.5038	5240.028	5.3435	5240.025	4.7710

FREQUENCY STABILITY VERSUS VOLTAGE									
OPERATING FREQUENCY: 5240MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	ppm	(MHz)	ppm	(MHz)	ppm	(MHz)	ppm
20	138	5240.0066	1.2595	5240.0067	1.2786	5240.0056	1.0687	5240.0033	0.6298
	120	5240.005	0.9542	5240.0067	1.2786	5240.0057	1.0878	5240.0034	0.6489
	102	5240.0058	1.1069	5240.007	1.3359	5240.0055	1.0496	5240.0041	0.7824



A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).





6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

7.APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---