



FCC TEST REPORT

REPORT NO.: RF930507L03

MODEL NO.: WAP54G v2

RECEIVED: April 13, 2004

TESTED: April 13, 2004 ~ May 13, 2004

APPLICANT: Cisco-Linksys, LLC

ADDRESS: 121 Theory Drive, Irvine, CA 92612, U.S.A.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan,
R.O.C.

This test report consists of 103 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by any government agencies. The test results in the report only apply to the tested sample.



Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS	8
3.5	CONFIGURATION OF SYSTEM UNDER TEST	9
4	TEST TYPES AND RESULTS	10
4.1	CONDUCTED EMISSION MEASUREMENT	10
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	10
4.1.2	TEST INSTRUMENTS	10
4.1.3	TEST PROCEDURES	11
4.1.4	DEVIATION FROM TEST STANDARD	11
4.1.5	TEST SETUP	12
4.1.6	EUT OPERATING CONDITIONS	13
4.1.7	TEST RESULTS	14
4.2	RADIATED EMISSION MEASUREMENT	20
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	20
4.2.2	TEST INSTRUMENTS	21
4.2.3	TEST PROCEDURES	22
4.2.4	DEVIATION FROM TEST STANDARD	22
4.2.5	TEST SETUP	23
4.2.6	EUT OPERATING CONDITIONS	23
4.2.7	TEST RESULTS (A)	24
4.2.8	TEST RESULTS (B)	32
4.3	6dB BANDWIDTH MEASUREMENT	40
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	40
4.3.2	TEST INSTRUMENTS	40
4.3.3	TEST PROCEDURE	41
4.3.4	DEVIATION FROM TEST STANDARD	41
4.3.5	TEST SETUP	41
4.3.6	EUT OPERATING CONDITIONS	41
4.3.7	TEST RESULTS (A)	42
4.3.8	TEST RESULTS (B)	50



4.4	MAXIMUM PEAK OUTPUT POWER	58
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	58
4.4.2	TEST INSTRUMENTS	58
4.4.3	TEST PROCEDURES	59
4.4.4	DEVIATION FROM TEST STANDARD	59
4.4.5	TEST SETUP	59
4.4.6	EUT OPERATING CONDITIONS	59
4.4.7	TEST RESULTS (A & B)	60
4.5	POWER SPECTRAL DENSITY MEASUREMENT	61
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	61
4.5.2	TEST INSTRUMENTS	61
4.5.3	TEST PROCEDURE	62
4.5.4	DEVIATION FROM TEST STANDARD	62
4.5.5	TEST SETUP	62
4.5.6	EUT OPERATING CONDITIONS	62
4.5.7	TEST RESULTS (A)	63
4.5.8	TEST RESULTS (B)	71
4.6	BAND EDGES MEASUREMENT	79
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	79
4.6.2	TEST INSTRUMENTS	79
4.6.3	TEST PROCEDURE	79
4.6.4	DEVIATION FROM TEST STANDARD	79
4.6.5	EUT OPERATING CONDITION	79
4.6.6	TEST RESULTS (A)	80
4.6.7	TEST RESULTS (B)	89
4.7	ANTENNA REQUIREMENT	98
4.7.1	STANDARD APPLICABLE	98
4.7.2	ANTENNA CONNECTED CONSTRUCTION	98
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	99
6	INFORMATION ON THE TESTING LABORATORIES	103



1 CERTIFICATION

PRODUCT : Wireless-G Access Point
BRAND NAME : Linksys
MODEL NO. : WAP54G v2
APPLICANT : Cisco-Linksys, LLC
TESTED : April 13, 2004 ~ May 13, 2004
TEST ITEM : Engineering Sample
STANDARDS : FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2001

The above equipment has been tested by Advance Data Technology Corporation, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY: Wendy Liao, DATE: May 14, 2004
Wendy Liao
APPROVED BY: Cody Chang / for DATE: May 14, 2004
Cody Chang /
Supervisor

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -15.37dB at 0.240MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -1.24dB at 400.02MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

NOTE: The information of measurement uncertainty is available upon the customer's request.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless-G Access Point
MODEL NO.	WAP54G v2
POWER SUPPLY	12.0Vdc from power adapter
MODULATION TYPE	BPSK, QPSK, CCK, 16QAM, 64QAM
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER (CCK)	13.00dBm
OUTPUT POWER (OFDM)	14.00dBm
ANTENNA TYPE	Dipole antenna with 4.5dBi and 7dBi gain
DATA CABLE	NA
I/O PORTS	RJ45
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
2. The EUT complies with IEEE 802.11g draft standards and backwards compatible with IEEE 802.11b products.
3. The EUT was powered by the following adapter:

Brand:	Linksys
Model:	WD411200500
Input:	120Vac, 60Hz, 11W
Output:	12Vdc, 500mA

4. The maximum peak power output is in the following table:

Antenna type	Antenna gain	Peak power output (dBm)
Dipole	7dBi	14.00
Dipole	4.5dBi	14.00

5. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, the worst case, was chosen for final test.
2. Above 1GHz, the channel 1, 6, and 11 were tested individually.
3. From our experience and technical viewpoint, we have chosen data rates 11Mbps for CCK technique and 6Mbps for OFDM technique, as the worst cases for the test among other data rates.
4. There are two test results presented in the following sections: The test result A is for antenna with 7dBi gain attached to EUT directly, and the test result B is for antenna with 4.5dBi gain separated from EUT (with antenna stand).

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Wireless-G Access Point. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4:2001

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	COMPAQ	Evo N800c	PP2130	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA

NOTE: 1. All power cords of the above support units are non shielded (1.8m).
2. Item 1 act as a communication partner to transfer data.

3.5 CONFIGURATION OF SYSTEM UNDER TEST

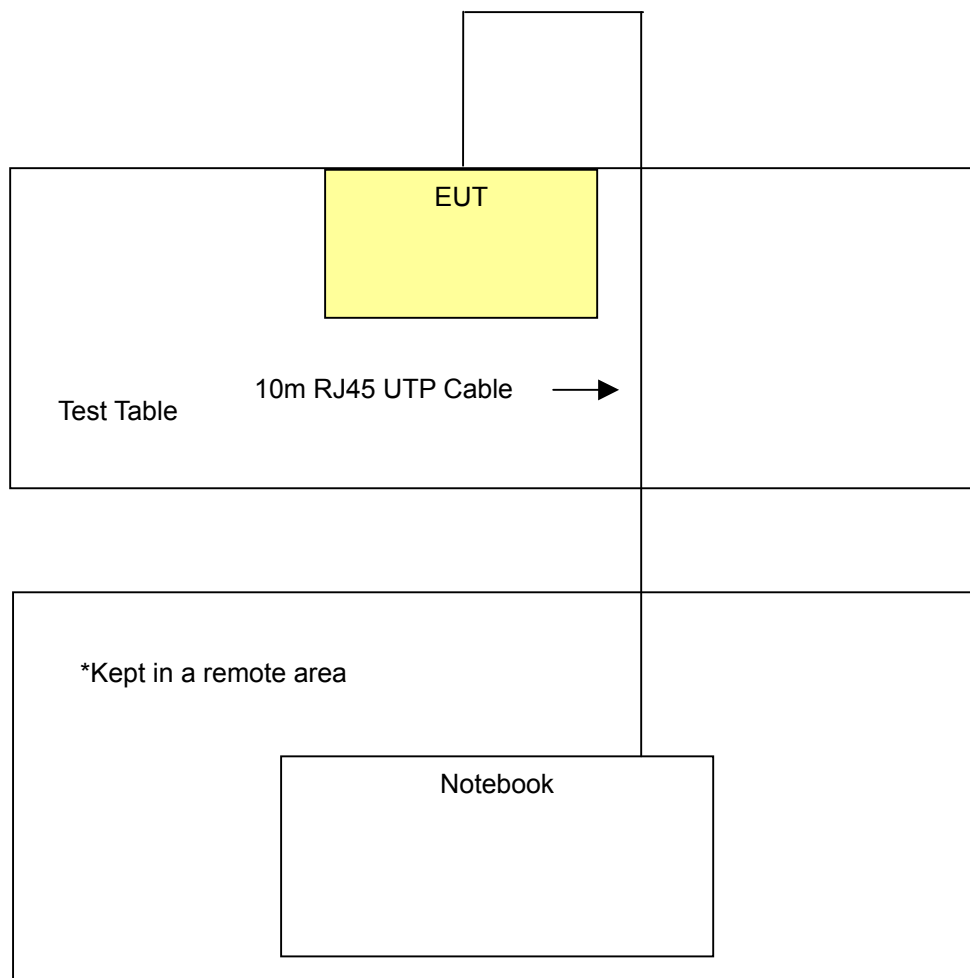

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Dec. 11, 2004
RF signal cable Woken	5D-FB	Cable-HyC02-01	Mar. 07, 2005
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Mar. 10, 2005
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Mar. 04, 2005
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels (Limit -20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

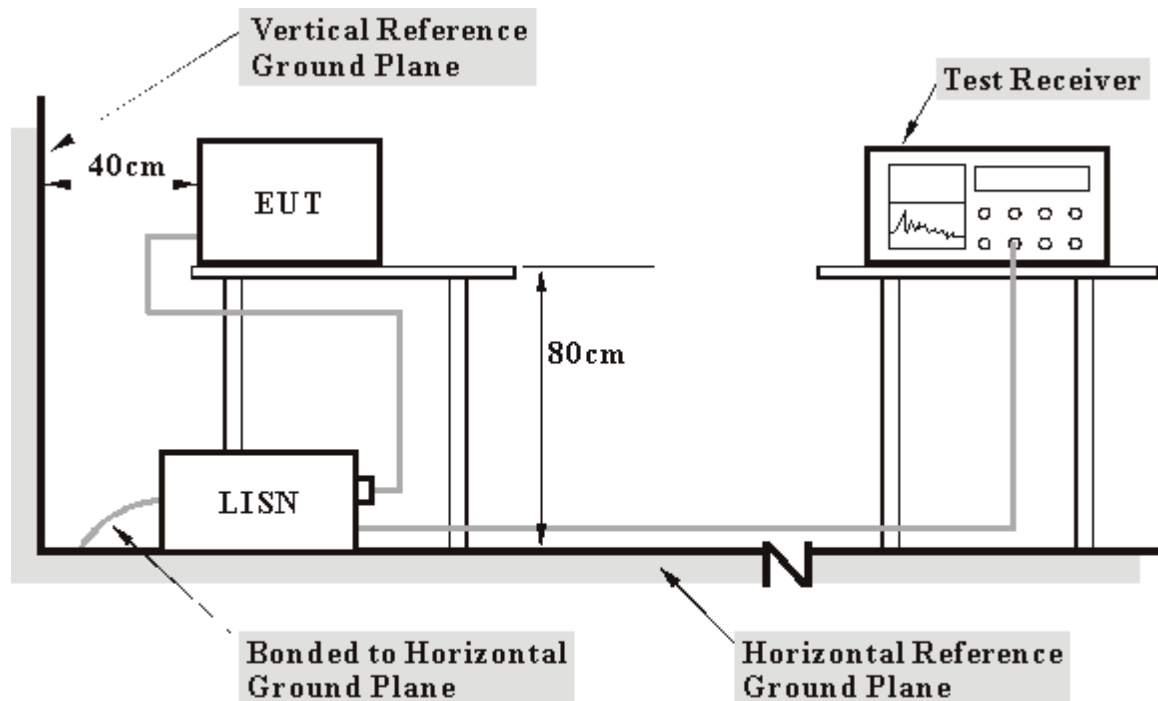

- Note:** 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.1.6 EUT OPERATING CONDITIONS


- a. Placed the EUT on the testing table.
- b. Prepared another notebook system to act as a communication partner and placed it outside of testing area.
- c. The communication partner run a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency via an RJ45 cable.
- d. The communication partner sent data to EUT by command "PING".

4.1.7 TEST RESULTS

EUT	Wireless-G Access Point	MODEL	WAP54G v2
CHANNEL	1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH, 991 hPa	TESTED BY: Gary Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.166	0.10	46.34	-	46.44	-	65.18	55.18	-18.73	-
2	0.224	0.10	43.72	-	43.82	-	62.66	52.66	-18.84	-
3	0.322	0.11	35.21	-	35.32	-	59.66	49.66	-24.34	-
4	0.845	0.21	27.25	-	27.46	-	56.00	46.00	-28.54	-
5	1.238	0.25	26.85	-	27.10	-	56.00	46.00	-28.90	-
6	17.082	0.79	25.53	-	26.32	-	60.00	50.00	-33.68	-


- REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

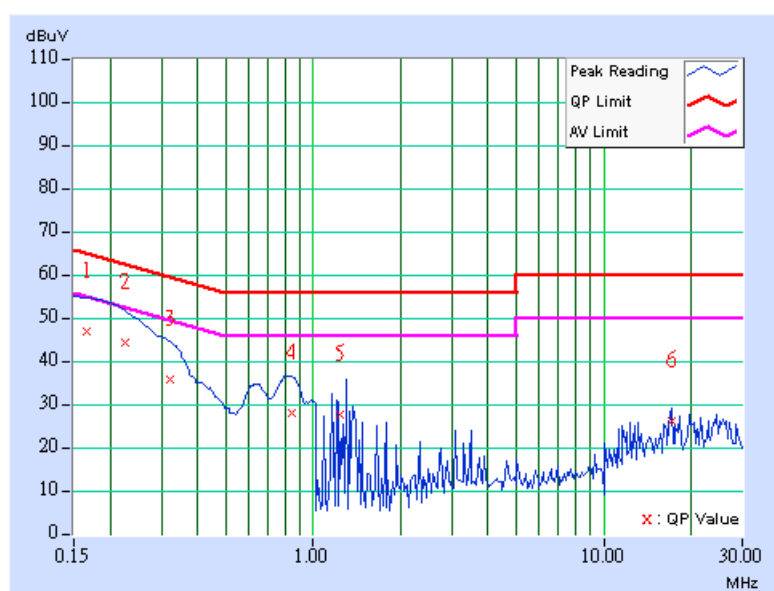

EUT	Wireless-G Access Point	MODEL	WAP54G v2
CHANNEL	1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH, 991 hPa	TESTED BY: Gary Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.10	47.71	-	47.81	-	65.58	55.58	-17.77	-
2	0.220	0.10	46.85	-	46.95	-	62.81	52.81	-15.86	-
3	0.330	0.11	42.28	-	42.39	-	59.46	49.46	-17.07	-
4	0.556	0.15	35.03	-	35.18	-	56.00	46.00	-20.82	-
5	1.621	0.25	17.82	-	18.07	-	56.00	46.00	-37.93	-
6	19.711	0.64	25.26	-	25.90	-	60.00	50.00	-34.10	-


- REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

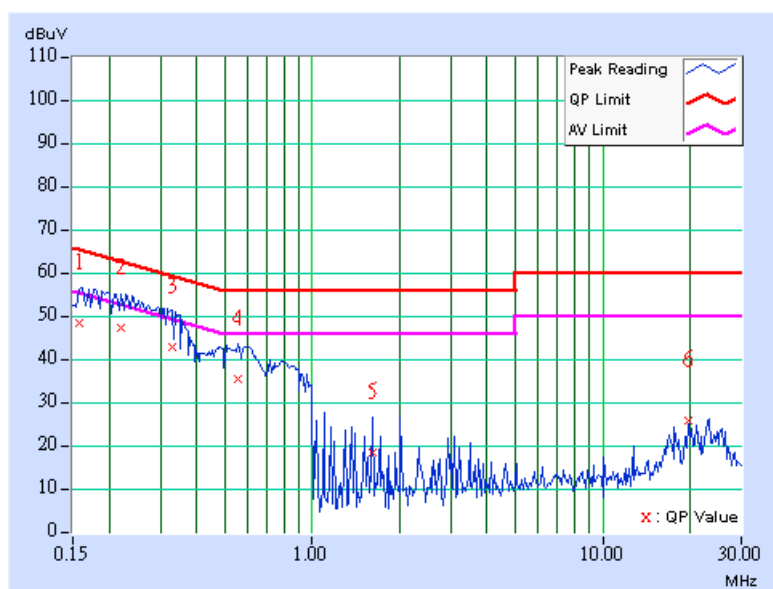

EUT	Wireless-G Access Point	MODEL	WAP54G v2
CHANNEL	6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH, 991 hPa	TESTED BY: Gary Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.10	46.59	-	46.69	-	65.58	55.58	-18.88	-
2	0.216	0.10	44.51	-	44.61	-	62.96	52.96	-18.34	-
3	0.318	0.11	36.13	-	36.24	-	59.76	49.76	-23.52	-
4	0.798	0.20	27.36	-	27.56	-	56.00	46.00	-28.44	-
5	1.386	0.25	22.50	-	22.75	-	56.00	46.00	-33.25	-
6	16.777	0.78	24.05	-	24.83	-	60.00	50.00	-35.17	-


- REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

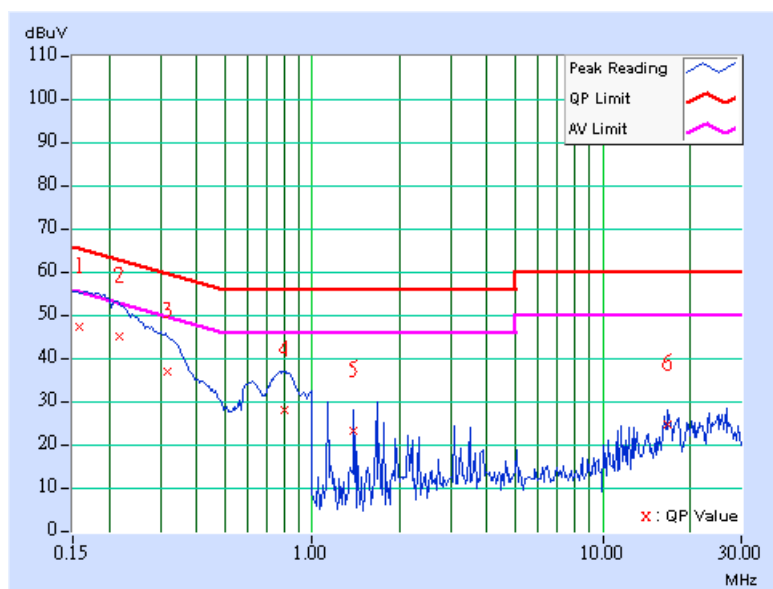

EUT	Wireless-G Access Point	MODEL	WAP54G v2
CHANNEL	6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH, 991 hPa	TESTED BY: Gary Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.10	47.23	-	47.33	-	64.43	54.43	-17.10	-
2	0.236	0.10	46.63	-	46.73	-	62.24	52.24	-15.51	-
3	0.334	0.11	42.14	-	42.25	-	59.36	49.36	-17.11	-
4	0.607	0.15	34.63	-	34.78	-	56.00	46.00	-21.22	-
5	1.438	0.24	19.21	-	19.45	-	56.00	46.00	-36.55	-
6	20.379	0.65	23.17	-	23.82	-	60.00	50.00	-36.18	-


- REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

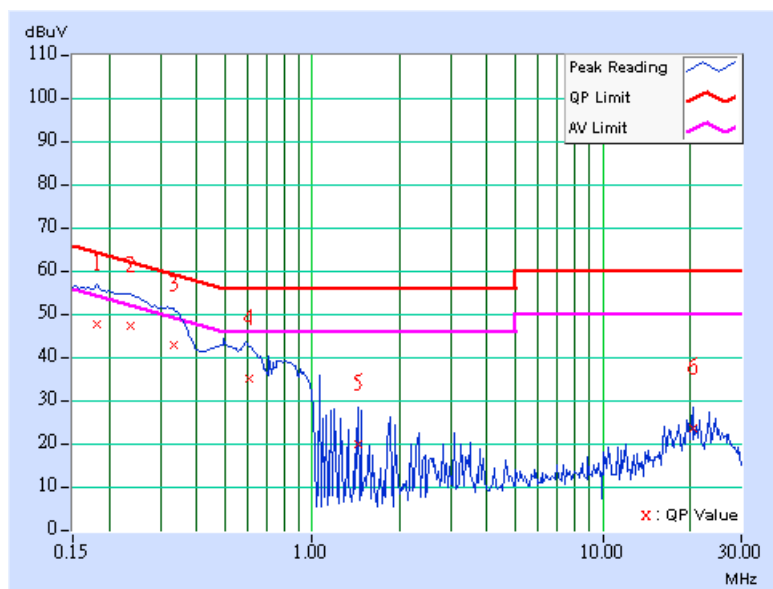

EUT	Wireless-G Access Point	MODEL	WAP54G v2
CHANNEL	11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH, 991 hPa	TESTED BY: Gary Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.166	0.10	46.46	-	46.56	-	65.18	55.18	-18.61	-
2	0.220	0.10	43.97	-	44.07	-	62.81	52.81	-18.74	-
3	0.326	0.11	35.50	-	35.61	-	59.56	49.56	-23.95	-
4	0.848	0.21	27.13	-	27.34	-	56.00	46.00	-28.66	-
5	1.484	0.25	17.54	-	17.79	-	56.00	46.00	-38.21	-
6	24.348	1.13	25.83	-	26.96	-	60.00	50.00	-33.04	-


- REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

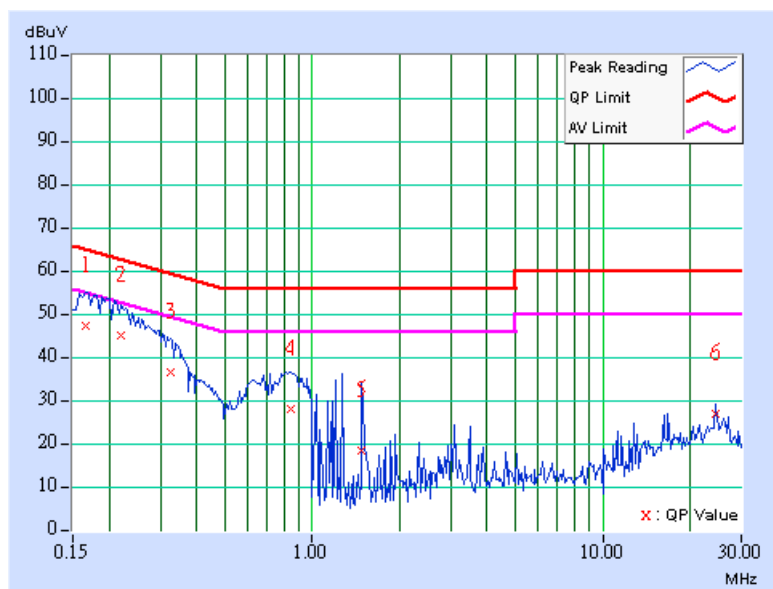

EUT	Wireless-G Access Point	MODEL	WAP54G v2
CHANNEL	11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Netural (N)
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH, 991 hPa	TESTED BY: Gary Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.189	0.10	47.19	-	47.29	-	64.08	54.08	-16.79	-
2	0.240	0.10	46.63	-	46.73	-	62.10	52.10	-15.37	-
3	0.341	0.11	41.47	-	41.58	-	59.17	49.17	-17.59	-
4	0.606	0.15	34.77	-	34.92	-	56.00	46.00	-21.08	-
5	1.483	0.24	15.54	-	15.78	-	56.00	46.00	-40.22	-
6	23.500	0.69	9.95	-	10.64	-	60.00	50.00	-49.36	-

- REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

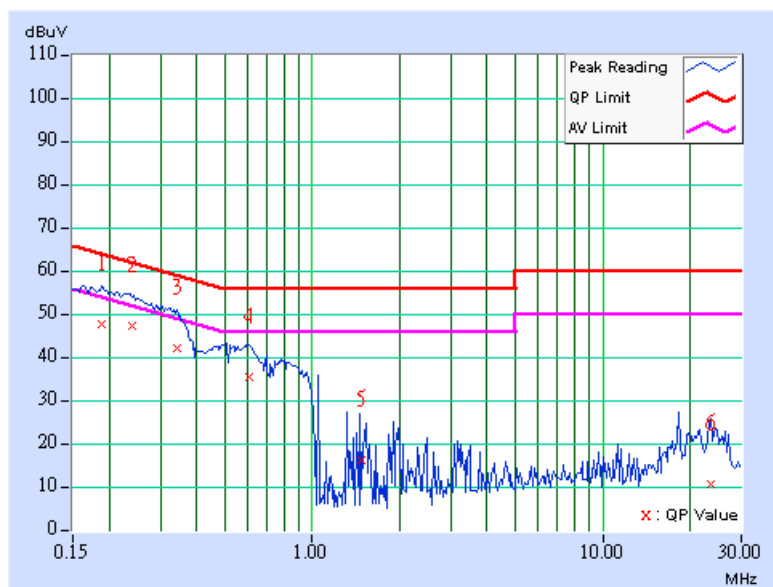

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Feb. 09, 2005
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Dec. 15, 2004
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-404	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170242	Feb. 23, 2005
Preamplifier Agilent	8447D	2944A10631	Jan. 15, 2005
Preamplifier Agilent	8449B	3008A01960	Jan. 22, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219272/4	Mar. 04, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219275/4	Mar. 04, 2005
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA
Turn Table ADT.	TT100.	TT93021704	NA
Turn Table Controller ADT.	SC100.	SC93021704	NA

- NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 3.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The IC Site Registration No. is IC4924-4.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 10 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

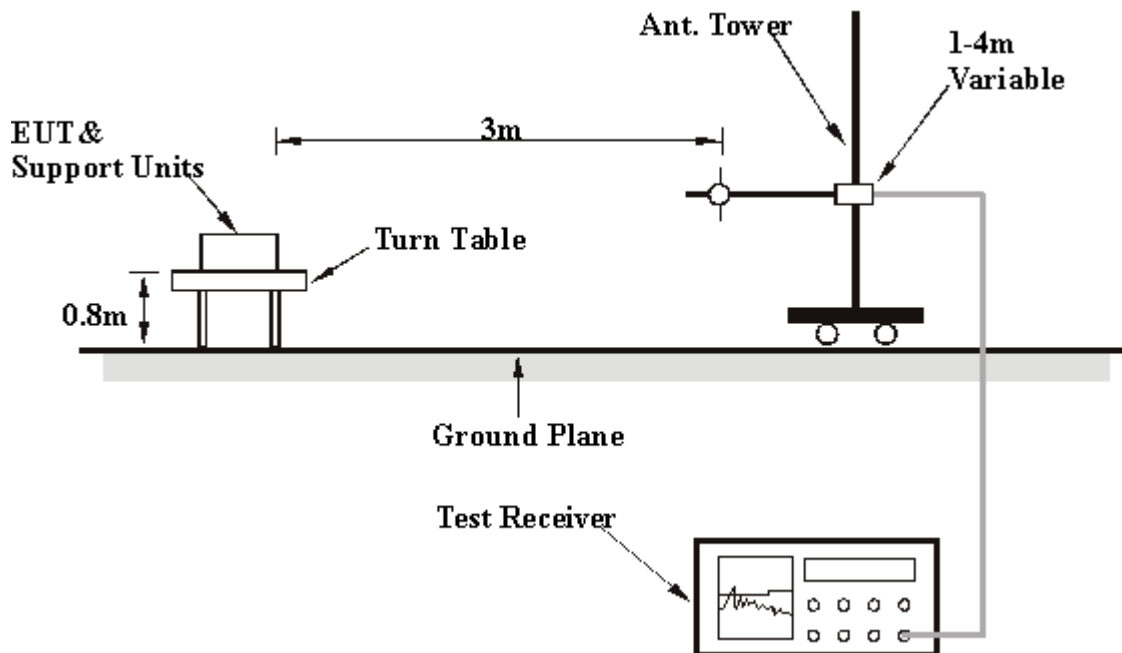

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS (A)

EUT	Wireless-G Access Point	MODEL	WAP54G v2
CHANNEL	11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120 Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH, 991 hPa	TESTED BY: Long Chen	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	105.81	37.60 QP	43.50	-5.90	3.00 H	229	25.97	11.64
2	149.99	30.17 QP	43.50	-13.33	2.02 H	86	15.74	14.42
3	210.82	34.15 QP	43.50	-9.35	1.49 H	81	22.21	11.94
4	249.66	39.84 QP	46.00	-6.16	1.00 H	49	26.43	13.41
5	300.20	39.35 QP	46.00	-6.65	1.00 H	265	24.54	14.81
6	399.34	40.86 QP	46.00	-5.14	2.00 H	187	23.92	16.95
7	430.44	36.09 QP	46.00	-9.91	2.00 H	187	18.43	17.66
8	500.42	42.35 QP	46.00	-3.65	1.50 H	337	23.63	18.72
9	535.41	36.88 QP	46.00	-9.12	2.00 H	142	17.39	19.49
10	589.84	37.88 QP	46.00	-8.12	2.50 H	193	16.92	20.96
11	644.27	38.28 QP	46.00	-7.72	2.00 H	187	16.42	21.86
12	700.05	38.24 QP	46.00	-7.76	1.00 H	294	15.73	22.51
13	751.18	37.00 QP	46.00	-9.00	1.00 H	280	13.32	23.68
14	804.01	38.54 QP	46.00	-7.46	1.00 H	306	14.73	23.81
15	900.86	37.34 QP	46.00	-8.66	1.50 H	1	12.09	25.25

- REMARKS:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT	Wireless-G Access Point	MODEL	WAP54G v2
CHANNEL	11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH, 991 hPa	TESTED BY: Long Chen	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	42.94	36.09 QP	40.00	-3.91	1.12 V	120	20.17	15.92
2	76.65	36.99 QP	40.00	-3.01	3.00 V	205	25.67	11.33
3	100.02	33.21 QP	43.50	-10.29	1.30 V	311	22.07	11.14
4	125.01	31.20 QP	43.50	-12.30	1.12 V	21	18.03	13.17
5	200.02	37.88 QP	43.50	-5.62	1.00 V	223	26.42	11.46
6	267.15	42.86 QP	46.00	-3.14	1.50 V	190	28.94	13.92
7	300.20	43.15 QP	46.00	-2.85	1.50 V	190	28.33	14.81
8	400.02	44.76 QP	46.00	-1.24	1.55 V	108	27.80	16.96
9	432.38	41.87 QP	46.00	-4.13	3.00 V	202	24.16	17.70
10	463.49	36.48 QP	46.00	-9.52	3.50 V	148	18.21	18.27
11	500.42	43.18 QP	46.00	-2.82	1.00 V	46	24.46	18.72
12	535.41	39.84 QP	46.00	-6.16	1.50 V	190	20.35	19.49
13	611.22	36.97 QP	46.00	-9.03	3.50 V	151	15.56	21.40
14	648.16	37.09 QP	46.00	-8.91	3.50 V	151	15.18	21.91
15	700.07	35.27 QP	46.00	-10.73	1.49 V	209	12.76	22.51
16	900.86	36.34 QP	46.00	-9.66	1.50 V	16	11.09	25.25

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

EUT	Wireless-G Access Point	MODEL	WAP54G v2
CHANNEL	1	FREQUENCY RANGE	1~25 GHz
MODE	CCK		
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH, 991 hPa	TESTED BY: Long Chen	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	46.42 PK	74.00	-27.58	1.67 H	134	17.85	28.57
2	*2412.00	92.55 PK			1.61 H	175	62.22	30.33
2	*2412.00	79.75 AV			1.61 H	175	49.42	30.33
3	2390.00	34.64 PK	74.00	-39.36	1.61 H	175	3.50	31.14
4	3216.00	49.22 PK	74.00	-24.78	1.40 H	253	15.69	33.53
5	4824.00	51.17 PK	74.00	-22.83	1.33 H	99	13.29	37.88
5	4824.00	44.42 AV	54.00	-9.58	1.33 H	99	6.54	37.88
6	9648.00	57.37 PK	74.00	-16.63	1.32 H	306	10.97	46.40
6	9648.00	46.99 AV	54.00	-7.01	1.32 H	306	0.59	46.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	46.21 PK	74.00	-27.79	1.56 V	197	17.64	28.57
2	2390.00	54.58 PK	74.00	-19.42	1.00 V	172	23.44	31.14
2	2390.00	47.54 AV	54.00	-6.46	1.00 V	172	16.40	31.14
3	*2412.00	112.49 PK			1.00 V	172	81.28	31.21
3	*2412.00	105.45 AV			1.00 V	172	74.24	31.21
4	3216.00	50.58 PK	74.00	-23.42	1.26 V	235	17.05	33.53
4	3216.00	45.27 AV	54.00	-8.73	1.26 V	235	11.74	33.53
5	4824.00	53.08 PK	74.00	-20.92	1.00 V	54	15.20	37.88
5	4824.00	38.37 AV	54.00	-15.63	1.00 V	54	0.49	37.88
6	9648.00	57.73 PK	74.00	-16.27	1.58 V	197	11.33	46.40
6	9648.00	45.72 AV	54.00	-8.28	1.58 V	197	-0.68	46.40

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency

EUT	Wireless-G Access Point	MODEL	WAP54G v2
CHANNEL	6	FREQUENCY RANGE	1~25 GHz
MODE	CCK		
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH, 991 hPa	TESTED BY: Long Chen	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	47.98 PK	74.00	-26.02	1.12 H	129	19.40	28.58
2	*2437.00	95.81 PK			1.28 H	147	64.48	31.34
2	*2437.00	89.18 AV			1.28 H	147	57.84	31.34
3	3249.00	44.15 PK	74.00	-29.85	1.12 H	193	10.56	33.59
4	4874.00	49.19 PK	74.00	-24.81	1.81 H	200	11.20	37.99
5	9748.00	56.12 PK	74.00	-17.88	1.12 H	193	9.74	46.38
5	9748.00	42.72 AV	54.00	-11.28	1.12 H	193	-3.66	46.38

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	46.90 PK	74.00	-27.10	2.16 V	165	18.32	28.58
2	*2437.00	110.62 PK			1.09 V	153	79.29	31.34
2	*2437.00	103.53 AV			1.09 V	153	72.19	31.34
3	3249.00	49.48 PK	74.00	-24.52	1.85 V	350	15.89	33.59
4	4874.00	54.35 PK	74.00	-19.65	1.13 V	92	16.36	37.99
4	4874.00	51.24 AV	54.00	-2.76	1.13 V	92	13.25	37.99
5	9748.00	57.76 PK	74.00	-16.24	1.85 V	315	11.38	46.38
5	9748.00	48.54 AV	54.00	-5.46	1.85 V	315	2.16	46.38

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency



EUT	Wireless-G Access Point	MODEL	WAP54G v2
CHANNEL	11	FREQUENCY RANGE	1~25 GHz
MODE	CCK		
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH, 991 hPa	TESTED BY: Long Chen	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	47.14 PK	74.00	-26.86	1.74 H	303	18.54	28.59
2	*2462.00	89.69 PK			1.84 H	106	58.23	31.46
2	*2462.00	82.99 AV			1.84 H	106	51.53	31.46
3	2483.50	35.59 PK	74.00	-38.41	1.84 H	106	4.02	31.57
4	3282.00	49.71 PK	74.00	-24.29	1.26 H	300	16.06	33.65
4	3282.00	44.76 AV	54.00	-9.24	1.26 H	300	11.11	33.65
5	4924.00	48.47 PK	74.00	-25.53	1.74 H	140	10.36	38.11
6	9849.00	58.29 PK	74.00	-15.71	1.07 H	80	11.78	46.51
6	9849.00	43.94 AV	54.00	-10.06	1.07 H	80	-2.57	46.51

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	50.40 PK	74.00	-23.60	1.37 V	352	21.80	28.59
1	1641.00	42.82 AV	54.00	-11.18	1.37 V	352	14.22	28.59
2	*2462.00	107.38 PK			1.16 V	173	75.92	31.46
2	*2462.00	101.07 AV			1.16 V	173	69.61	31.46
3	2483.50	53.28 PK	74.00	-20.72	1.16 V	173	21.71	31.57
3	2483.50	46.97 AV	54.00	-7.03	1.16 V	173	15.40	31.57
4	3282.00	48.80 PK	74.00	-25.20	1.83 V	352	15.15	33.65
5	4924.00	54.34 PK	74.00	-19.66	1.06 V	107	16.23	38.11
5	4924.00	51.40 AV	54.00	-2.60	1.06 V	107	13.29	38.11
6	9848.00	57.44 PK	74.00	-16.56	1.53 V	104	10.93	46.51
6	9848.00	44.49 AV	54.00	-9.51	1.53 V	104	-2.02	46.51

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency

EUT	Wireless-G Access Point	MODEL	WAP54G v2
CHANNEL	1	FREQUENCY RANGE	1~25 GHz
MODE	OFDM		
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH, 991 hPa	TESTED BY: Long Chen	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	42.90 PK	74.00	-31.10	1.36 H	277	14.33	28.57
2	2390.00	49.43 PK	74.00	-24.57	1.28 H	145	18.29	31.14
3	*2412.00	101.97 PK			1.28 H	145	70.76	31.21
3	*2412.00	96.81 AV			1.28 H	145	65.60	31.21
4	3216.00	47.30 PK	74.00	-26.70	1.55 H	129	13.77	33.53
5	4824.00	48.25 PK	74.00	-25.75	1.29 H	232	10.37	37.88
6	9648.00	56.89 PK	74.00	-17.11	1.40 H	120	10.49	46.40
6	9648.00	43.68 AV	54.00	-10.32	1.40 H	120	-2.72	46.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	44.79 PK	74.00	-29.21	1.06 V	231	16.22	28.57
2	2390.00	58.75 PK	74.00	-15.25	1.06 V	96	27.61	31.14
2	2390.00	52.54 AV	54.00	-1.46	1.06 V	96	21.40	31.14
3	*2412.00	109.29 PK	74.00	35.29	1.06 V	96	78.08	31.21
3	*2412.00	102.53 AV	54.00	48.53	1.06 V	96	71.32	31.21
4	3216.00	49.53 PK	74.00	-24.47	1.43 V	336	16.00	33.53
5	4824.00	56.86 PK	74.00	-17.14	1.04 V	98	18.98	37.88
5	4824.00	51.20 AV	54.00	-2.80	1.04 V	98	13.32	37.88
6	9648.00	57.05 PK	74.00	-16.95	1.43 V	336	10.65	46.40
6	9648.00	44.90 AV	54.00	-9.10	1.43 V	336	-1.50	46.40

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency

EUT	Wireless-G Access Point	MODEL	WAP54G v2
CHANNEL	6	FREQUENCY RANGE	1~25 GHz
MODE	OFDM		
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH, 991 hPa	TESTED BY: Long Chen	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	44.67 PK	74.00	-29.33	1.89 H	299	16.09	28.58
2	*2437.00	95.63 PK			1.25 H	149	64.30	31.34
2	*2437.00	88.08 AV			1.25 H	149	56.74	31.34
3	3249.00	50.51 PK	74.00	-23.49	1.00 H	220	16.92	33.59
3	3249.00	45.55 AV	54.00	-8.45	1.00 H	220	11.96	33.59
4	4874.00	48.54 PK	74.00	-25.46	1.24 H	200	10.55	37.99
5	9748.00	57.01 PK	74.00	-16.99	1.53 H	108	10.63	46.38

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.50	48.90 PK	74.00	-25.10	1.43 V	203	20.32	28.58
1	1624.50	41.13 AV	54.00	-12.87	1.43 V	203	12.55	28.58
2	*2437.00	110.12 PK			1.41 V	175	78.79	31.34
2	*2437.00	103.43 AV			1.41 V	175	72.09	31.34
3	3249.00	49.58 PK	74.00	-24.42	1.05 V	244	15.99	33.59
4	4874.00	50.84 PK	74.00	-23.16	1.26 V	321	12.85	37.99
4	4874.00	40.99 AV	54.00	-13.01	1.26 V	321	3.00	37.99
5	9748.00	56.36 PK	74.00	-17.64	1.64 V	189	9.98	46.38
5	9748.00	44.41 AV	54.00	-9.59	1.64 V	189	-1.97	46.38

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency

EUT	Wireless-G Access Point	MODEL	WAP54G v2
CHANNEL	11	FREQUENCY RANGE	1~25 GHz
MODE	OFDM		
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH, 991 hPa	TESTED BY: Long Chen	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	46.42 PK	74.00	-27.58	1.00 H	129	17.82	28.59
2	*2462.00	90.88 PK			1.80 H	106	59.42	31.46
2	*2462.00	83.90 AV			1.80 H	106	52.44	31.46
3	2483.50	49.00 PK	74.00	-25.00	1.80 H	106	17.43	31.57
4	3282.00	48.54 PK	74.00	-25.46	1.33 H	216	14.89	33.65
5	4924.00	47.48 PK	74.00	-26.52	4.00 H	186	9.37	38.11
6	9848.00	56.08 PK	74.00	-17.92	1.30 H	169	9.57	46.51
6	9848.00	43.26 AV	54.00	-10.74	1.30 H	169	-3.25	46.51

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	48.73 PK	74.00	-25.27	1.00 V	155	20.13	28.59
2	*2462.00	108.39 PK			1.05 V	159	76.93	31.46
2	*2462.00	101.53 AV			1.05 V	159	70.07	31.46
3	2483.50	61.55 PK	74.00	-12.45	1.05 V	159	29.98	31.57
3	2483.50	52.36 AV	54.00	-1.64	1.05 V	159	20.79	31.57
4	3282.00	46.26 PK	74.00	-27.74	1.16 V	74	12.61	33.65
5	4924.00	51.26 PK	74.00	-22.74	1.11 V	172	13.15	38.11
5	4924.00	47.43 AV	54.00	-6.57	1.11 V	172	9.32	38.11
6	9848.00	56.09 PK	74.00	-17.91	1.24 V	265	9.58	46.51
6	9848.00	43.33 AV	54.00	-10.67	1.24 V	265	-3.18	46.51

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency

4.2.8 TEST RESULTS (B)

EUT	Wireless-G Access Point	MODEL	WAP54G v2
CHANNEL	11	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH, 991 hPa	TESTED BY: Long Chen	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	61.10	25.42 QP	40.00	-14.58	3.00 H	175	11.59	13.83
2	123.31	35.50 QP	43.50	-8.00	3.00 H	10	22.44	13.06
3	168.02	29.66 QP	43.50	-13.84	1.50 H	79	15.62	14.03
4	199.12	38.13 QP	43.50	-5.37	1.50 H	199	26.61	11.53
5	249.66	37.74 QP	46.00	-8.26	1.00 H	67	24.33	13.41
6	300.20	42.83 QP	46.00	-3.17	1.00 H	76	28.02	14.81
7	333.25	37.92 QP	46.00	-8.08	2.50 H	64	22.41	15.51
8	366.29	31.94 QP	46.00	-14.06	2.00 H	31	15.72	16.22
9	399.34	42.02 QP	46.00	-3.98	2.50 H	154	25.08	16.95
10	449.88	36.60 QP	46.00	-9.40	1.50 H	163	18.50	18.11
11	624.83	33.61 QP	46.00	-12.39	1.00 H	55	12.02	21.59
12	720.08	34.87 QP	46.00	-11.13	1.00 H	118	11.89	22.98
13	751.18	40.18 QP	46.00	-5.82	1.00 H	34	16.49	23.68
14	805.61	34.36 QP	46.00	-11.64	2.00 H	196	10.53	23.82
15	875.59	36.33 QP	46.00	-9.67	1.50 H	175	11.57	24.76

- REMARKS:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT	Wireless-G Access Point	MODEL	WAP54G v2
CHANNEL	11	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH, 991 hPa	TESTED BY: Long Chen	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.89	26.59 QP	40.00	-13.41	1.00 V	100	11.79	14.81
2	70.82	30.15 QP	40.00	-9.85	1.50 V	70	17.38	12.77
3	123.31	32.65 QP	43.50	-10.85	2.50 V	322	19.59	13.06
4	199.12	37.15 QP	43.50	-6.35	1.00 V	34	25.62	11.53
5	263.27	36.23 QP	46.00	-9.77	1.50 V	232	22.49	13.74
6	300.20	43.21 QP	46.00	-2.79	1.50 V	139	28.40	14.81
7	333.25	38.26 QP	46.00	-7.74	1.50 V	229	22.75	15.51
8	366.29	33.41 QP	46.00	-12.59	1.50 V	232	17.19	16.22
9	399.34	36.52 QP	46.00	-9.48	2.00 V	244	19.58	16.95
10	449.88	40.02 QP	46.00	-5.98	1.00 V	112	21.91	18.11
11	500.42	44.59 QP	46.00	-1.41	1.00 V	1	25.87	18.72
12	599.56	36.65 QP	46.00	-9.35	1.00 V	262	15.41	21.24
13	630.66	32.58 QP	46.00	-13.42	1.00 V	151	10.91	21.67
14	675.37	37.61 QP	46.00	-8.39	1.50 V	235	15.38	22.23
15	720.08	32.03 QP	46.00	-13.97	2.00 V	205	9.05	22.98
16	751.18	38.20 QP	46.00	-7.80	2.00 V	220	14.51	23.68
17	805.61	35.25 QP	46.00	-10.75	1.50 V	316	11.43	23.82
18	865.87	32.98 QP	46.00	-13.02	1.00 V	136	8.42	24.56

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

EUT	Wireless-G Access Point	MODEL	WAP54G v2
CHANNEL	1	FREQUENCY RANGE	1~25 GHz
MODE	CCK		
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 75% RH, 991 hPa	TESTED BY: Long Chen	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	46.30 PK	74.00	-27.70	1.50 H	141	17.73	28.57
2	2390.00	37.70 PK	74.00	-36.30	2.03 H	313	6.56	31.14
3	*2412.00	93.77 PK			2.03 H	313	62.56	31.21
3	*2412.00	86.79 AV			2.03 H	313	55.58	31.21
4	3216.00	50.85 PK	74.00	-23.15	1.24 H	100	17.32	33.53
4	3216.00	43.91 AV	54.00	-10.09	1.24 H	100	10.38	33.53
5	4824.00	49.04 PK	74.00	-24.96	1.20 H	358	11.16	37.88
6	9648.00	58.21 PK	74.00	-15.79	1.63 H	44	11.81	46.40
6	9648.00	47.69 AV	54.00	-6.31	1.63 H	44	1.29	46.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	46.06 PK	74.00	-27.94	1.00 V	130	17.49	28.57
2	2390.00	53.96 PK	74.00	-20.04	1.03 V	31	22.82	31.14
2	2390.00	47.09 AV	54.00	-6.91	1.03 V	31	15.95	31.14
3	*2412.00	110.03 PK			1.03 V	31	78.82	31.21
3	*2412.00	103.16 AV			1.03 V	31	71.95	31.21
4	3216.00	50.21 PK	74.00	-23.79	1.00 V	33	16.68	33.53
4	3216.00	44.95 AV	54.00	-9.05	1.00 V	33	11.42	33.53
5	4824.00	52.53 PK	74.00	-21.47	1.00 V	184	14.65	37.88
5	4824.00	47.73 AV	54.00	-6.27	1.00 V	184	9.85	37.88
6	9648.00	58.49 PK	74.00	-15.51	1.00 V	35	12.09	46.40
6	9648.00	50.42 AV	54.00	-3.58	1.00 V	35	4.02	46.40

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency

EUT	Wireless-G Access Point	MODEL	WAP54G v2
CHANNEL	6	FREQUENCY RANGE	1~25 GHz
MODE	CCK		
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 75% RH, 991 hPa	TESTED BY: Long Chen	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.50	39.92 PK	74.00	-34.08	1.83 H	134	11.34	28.58
2	*2437.00	96.31 PK			1.07 H	184	64.98	31.34
2	*2437.00	89.09 AV			1.07 H	184	57.75	31.34
3	3249.30	53.18 PK	74.00	-20.82	1.41 H	75	19.59	33.59
3	3249.30	50.01 AV	54.00	-3.99	1.41 H	75	16.42	33.59
4	4874.00	49.84 PK	74.00	-24.16	1.41 H	75	11.85	37.99
4	4874.00	37.17 AV	54.00	-16.83	1.41 H	75	-0.82	37.99
5	9749.00	59.01 PK	74.00	-14.99	1.42 H	46	12.63	46.38
5	9749.00	50.12 AV	54.00	-3.88	1.42 H	46	3.74	46.38

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	44.65 PK	74.00	-29.35	1.18 V	32	16.07	28.58
2	*2437.00	108.22 PK			1.35 V	193	76.88	31.34
2	*2437.00	101.00 AV			1.35 V	193	69.67	31.34
3	3249.00	49.66 PK	74.00	-24.34	1.40 V	41	16.07	33.59
3	3249.00	43.48 AV	54.00	-10.52	1.40 V	41	9.89	33.59
4	4874.00	52.14 PK	74.00	-21.86	1.42 V	324	14.15	37.99
4	4874.00	45.54 AV	54.00	-8.46	1.42 V	324	7.55	37.99
5	9748.00	58.72 PK	74.00	-15.28	1.24 V	160	12.34	46.38
5	9748.00	51.39 AV	54.00	-2.61	1.24 V	160	5.01	46.38

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency

EUT	Wireless-G Access Point	MODEL	WAP54G v2
CHANNEL	11	FREQUENCY RANGE	1~25 GHz
MODE	CCK		
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 75% RH, 991 hPa	TESTED BY: Long Chen	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	43.00 PK	74.00	-31.00	1.51 H	126	14.40	28.59
2	*2462.00	96.53 PK			1.53 H	143	65.07	31.46
2	*2462.00	88.82 AV			1.53 H	143	57.36	31.46
3	2483.50	47.00 PK	74.00	-27.00	1.53 H	143	15.43	31.57
4	3282.00	51.43 PK	74.00	-22.57	1.01 H	102	17.78	33.65
4	3282.00	48.64 AV	54.00	-5.36	1.01 H	102	14.99	33.65
5	4924.00	50.28 PK	74.00	-23.72	1.25 H	35	12.17	38.11
5	4924.00	42.58 AV	54.00	-11.42	1.25 H	35	4.47	38.11

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	44.21 PK	74.00	-29.79	1.14 V	321	15.61	28.59
2	*2462.00	109.11 PK			1.36 V	101	77.65	31.46
2	*2462.00	100.59 AV			1.36 V	101	69.13	31.46
3	2483.50	57.00 PK	74.00	-17.00	1.36 V	101	25.43	31.57
3	2483.50	48.50 AV	54.00	-5.50	1.36 V	101	16.93	31.57
4	3282.00	47.61 PK	74.00	-26.39	1.28 V	2	13.96	33.65
5	4924.00	53.42 PK	74.00	-20.58	1.17 V	245	15.31	38.11
5	4924.00	46.28 AV	54.00	-7.72	1.17 V	245	8.17	38.11

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency

EUT	Wireless-G Access Point	MODEL	WAP54G v2
CHANNEL	1	FREQUENCY RANGE	1~25 GHz
MODE	OFDM		
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 75% RH, 991 hPa	TESTED BY: Long Chen	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	40.70 PK	74.00	-33.30	1.59 H	345	12.13	28.57
2	2390.00	42.80 PK	74.00	-31.20	1.03 H	315	11.66	31.14
3	*2412.00	94.28 PK			1.03 H	315	63.07	31.21
3	*2412.00	85.09 AV			1.03 H	315	53.88	31.21
4	3216.00	50.17 PK	74.00	-23.83	1.21 H	185	16.64	33.53
4	3216.00	45.97 AV	54.00	-8.03	1.21 H	185	12.44	33.53
5	4824.00	48.36 PK	74.00	-25.64	1.33 H	34	10.48	37.88
6	9648.00	55.59 PK	74.00	-18.41	1.18 H	341	9.19	46.40
6	9648.00	49.30 AV	54.00	-4.70	1.18 H	341	2.90	46.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	43.89 PK	74.00	-30.11	1.31 V	358	15.32	28.57
2	2390.00	61.00 PK	74.00	-13.00	1.16 V	131	29.86	31.14
2	2390.00	51.20 AV	54.00	-2.80	1.16 V	131	20.06	31.14
3	*2412.00	108.37 PK			1.16 V	131	77.16	31.21
3	*2412.00	98.13 AV			1.16 V	131	66.92	31.21
4	3216.00	48.14 PK	74.00	-25.86	1.15 V	87	14.61	33.53
5	4824.00	52.36 PK	74.00	-21.64	1.31 V	62	14.48	37.88
5	4824.00	45.51 AV	54.00	-8.49	1.31 V	62	7.63	37.88
6	9648.00	55.80 PK	74.00	-18.20	1.52 V	34	9.40	46.40
6	9648.00	49.80 AV	54.00	-4.20	1.52 V	34	3.40	46.40

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency

EUT	Wireless-G Access Point	MODEL	WAP54G v2
CHANNEL	6	FREQUENCY RANGE	1~25 GHz
MODE	OFDM		
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 75% RH, 991 hPa	TESTED BY: Long Chen	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.60	42.06 PK	74.00	-31.94	1.64 H	35	13.48	28.58
2	*2437.00	94.38 PK			1.07 H	118	63.05	31.34
2	*2437.00	84.84 AV			1.07 H	118	53.50	31.34
3	3249.50	51.56 PK	74.00	-22.44	1.20 H	162	17.97	33.59
3	3249.50	48.04 AV	54.00	-5.96	1.20 H	162	14.45	33.59
4	4874.00	47.50 PK	74.00	-26.50	1.40 H	305	9.51	37.99
5	9748.00	56.03 PK	74.00	-17.97	1.23 H	352	9.65	46.38
5	9748.00	47.78 AV	54.00	-6.22	1.23 H	352	1.40	46.38

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.50	43.18 PK	74.00	-30.82	1.29 V	325	14.60	28.58
2	*2437.00	108.13 PK			1.16 V	136	76.80	31.34
2	*2437.00	96.94 AV			1.16 V	136	65.60	31.34
3	3249.50	48.38 PK	74.00	-25.62	1.40 V	352	14.79	33.59
4	4874.00	50.09 PK	74.00	-23.91	1.44 V	35	12.10	37.99
4	4874.00	42.14 AV	54.00	-11.86	1.44 V	35	4.15	37.99
5	9748.50	57.84 PK	74.00	-16.16	1.34 V	315	11.46	46.38
5	9748.50	49.78 AV	54.00	-4.22	1.34 V	315	3.40	46.38

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency

EUT	Wireless-G Access Point	MODEL	WAP54G v2
CHANNEL	11	FREQUENCY RANGE	1~25 GHz
MODE	OFDM		
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 75% RH, 991 hPa	TESTED BY: Long Chen	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	43.21 PK	74.00	-30.79	1.71 H	352	14.61	28.59
2	*2462.00	95.26 PK			1.02 H	143	63.80	31.46
2	*2462.00	88.81 AV			1.02 H	143	57.35	31.46
3	2483.50	50.10 PK	74.00	-23.90	1.02 H	143	18.53	31.57
3	2483.50	43.20 AV	54.00	-10.80	1.02 H	143	11.63	31.57
4	3282.00	49.06 PK	74.00	-24.94	1.45 H	360	15.41	33.65
4	3282.00	42.11 AV	54.00	-11.89	1.45 H	360	8.46	33.65
5	4924.00	50.28 PK	74.00	-23.72	1.59 H	345	12.17	38.11
5	4924.00	42.78 AV	54.00	-11.22	1.59 H	345	4.67	38.11
6	9848.00	56.21 PK	74.00	-17.79	1.14 H	345	9.70	46.51
6	9848.00	46.41 AV	54.00	-7.59	1.14 H	345	-0.10	46.51

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	44.75 PK	74.00	-29.25	1.46 V	247	16.15	28.59
2	*2462.00	107.87 PK			1.21 V	14	76.41	31.46
2	*2462.00	98.19 AV			1.21 V	14	66.73	31.46
3	2483.50	61.00 PK	74.00	-13.00	1.21 V	14	29.43	31.57
3	2483.50	52.10 AV	54.00	-1.90	1.21 V	14	20.53	31.57
4	3282.00	47.05 PK	74.00	-26.95	1.07 V	54	13.40	33.65
4	3282.00	42.41 AV	54.00	-11.59	1.07 V	54	8.76	33.65
5	4924.00	50.96 PK	74.00	-23.04	1.26 V	64	12.85	38.11
5	4924.00	41.78 AV	54.00	-12.22	1.26 V	64	3.67	38.11
6	9848.00	56.62 PK	74.00	-17.38	1.42 V	354	10.11	46.51
6	9848.00	47.91 AV	54.00	-6.09	1.42 V	354	1.40	46.51

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS (A)


EUT	Wireless-G Access Point	MODEL	WAP54G v2
MODE	CCK	INPUT POWER (SYSTEM)	120 Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH, 991 hPa	TESTED BY	Gary Chang

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	10.96	0.5	PASS
6	2437	10.72	0.5	PASS
11	2462	10.64	0.5	PASS


CH1

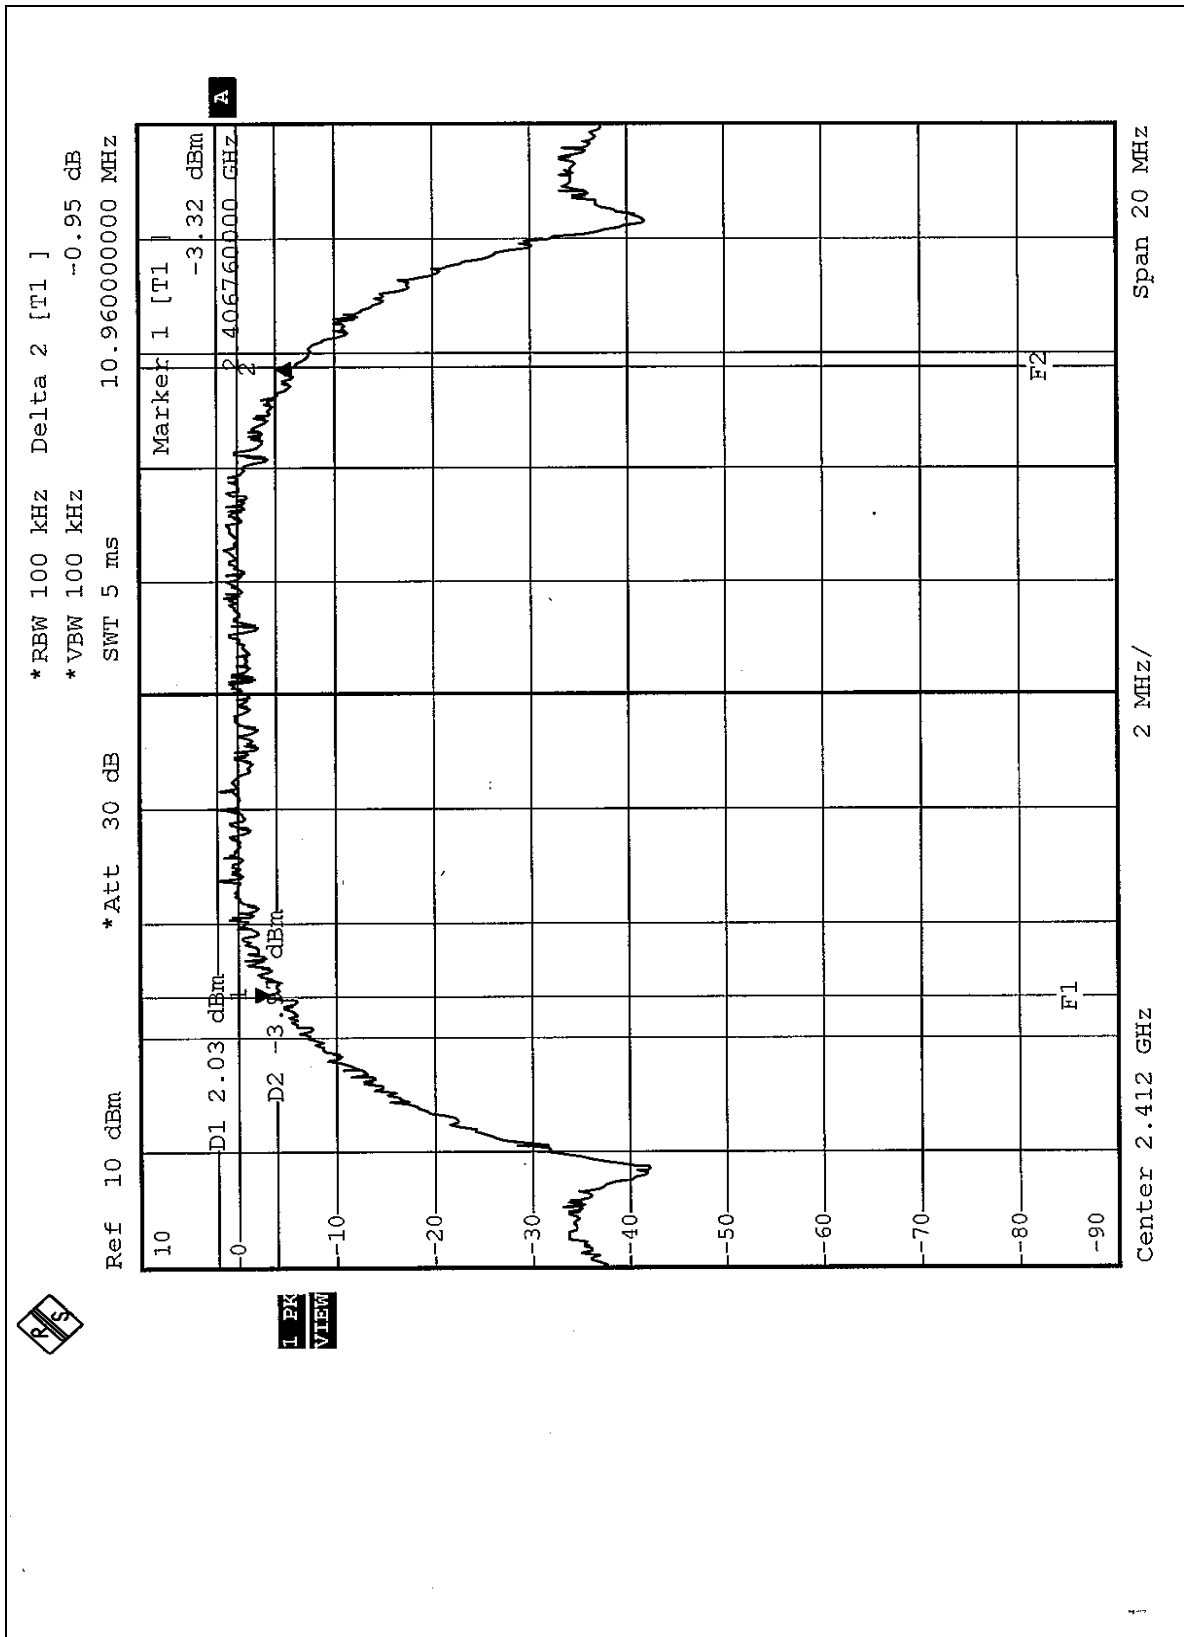

CH6

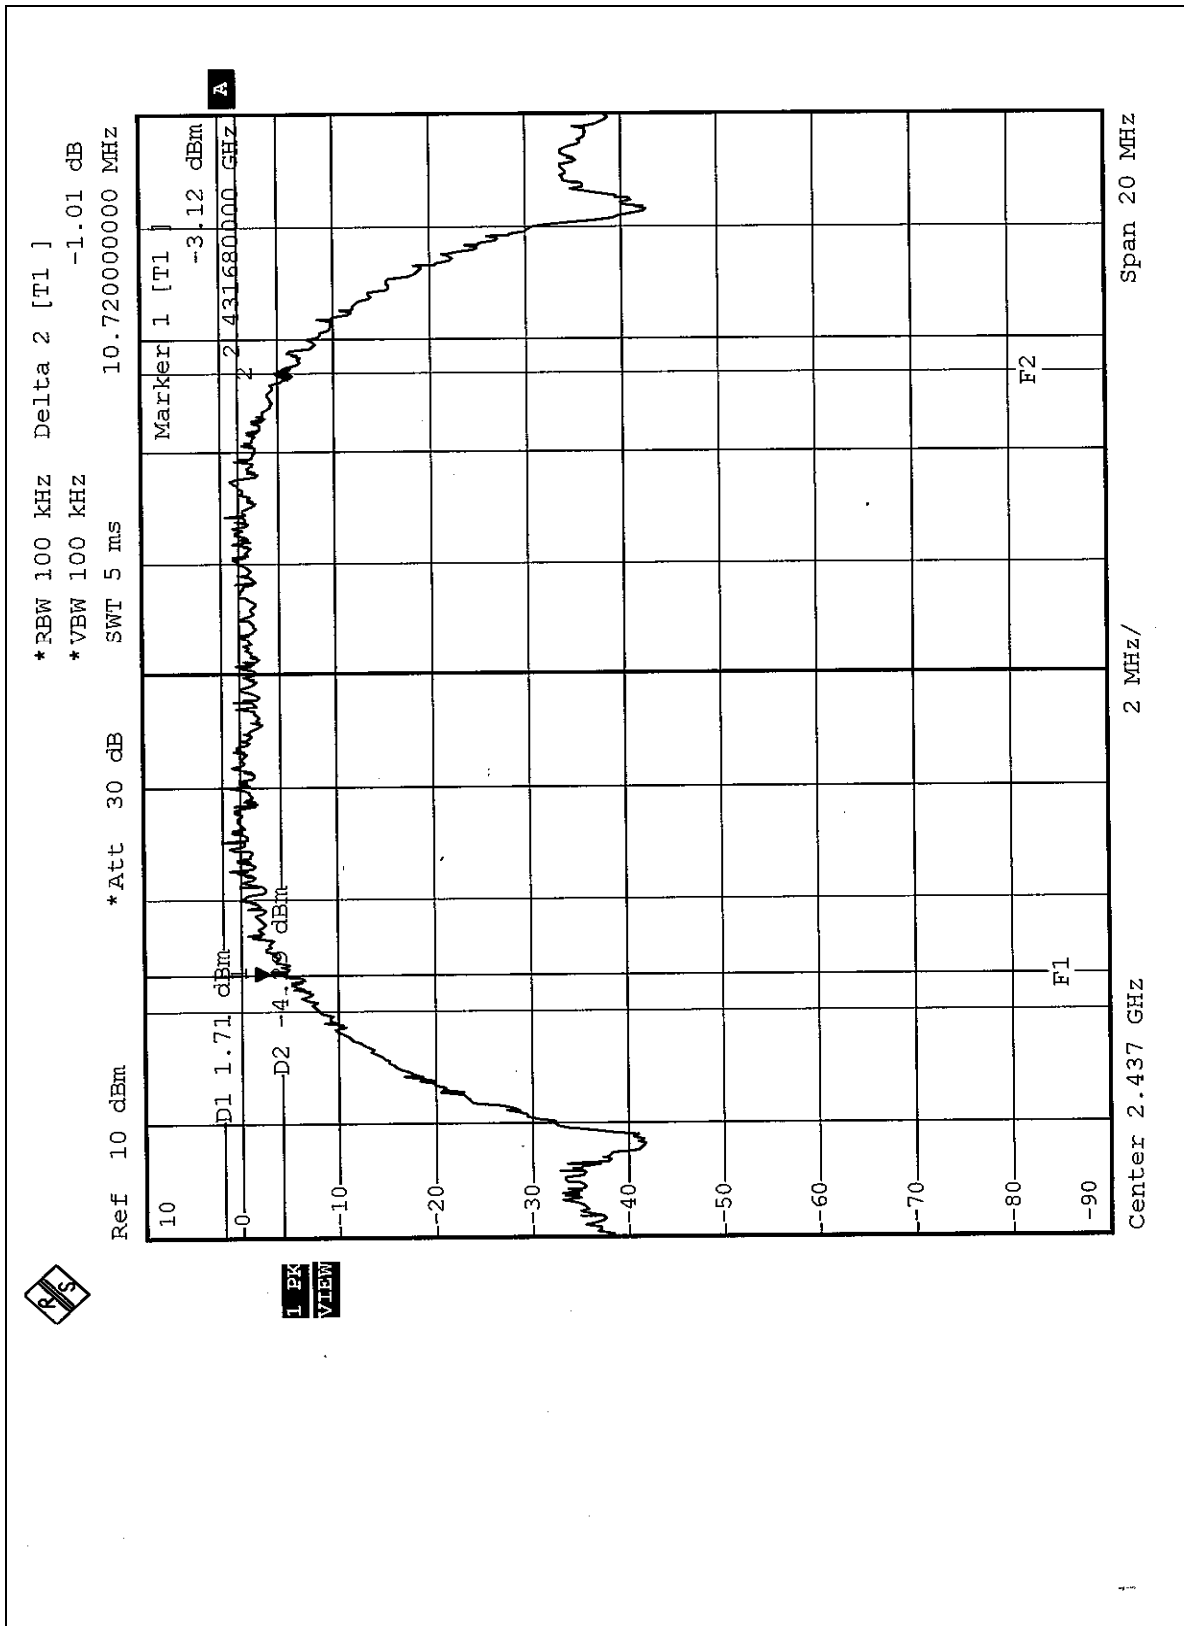

CH11

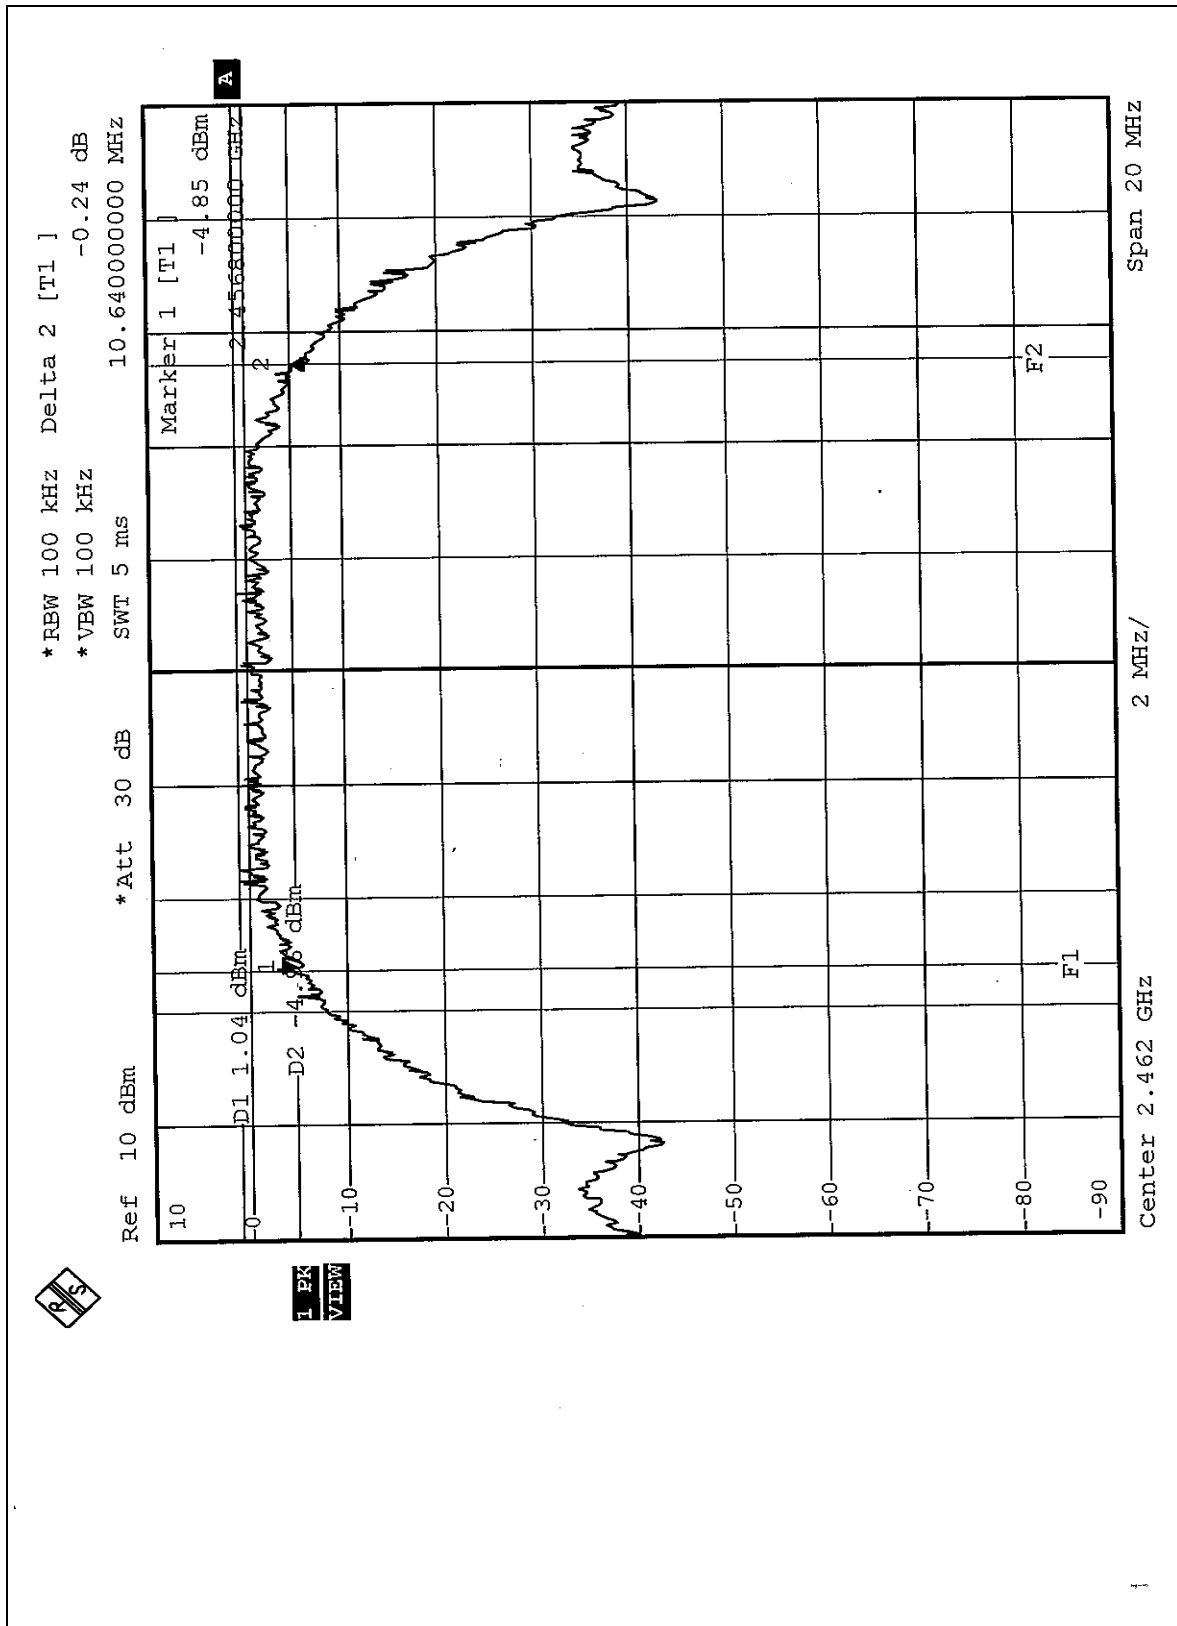





EUT	Wireless-G Access Point	MODEL	WAP54G v2
MODE	OFDM	INPUT POWER (SYSTEM)	120 Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH, 991 hPa	TESTED BY	Gary Chang

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.32	0.5	PASS
6	2437	16.28	0.5	PASS
11	2462	16.28	0.5	PASS


CH1

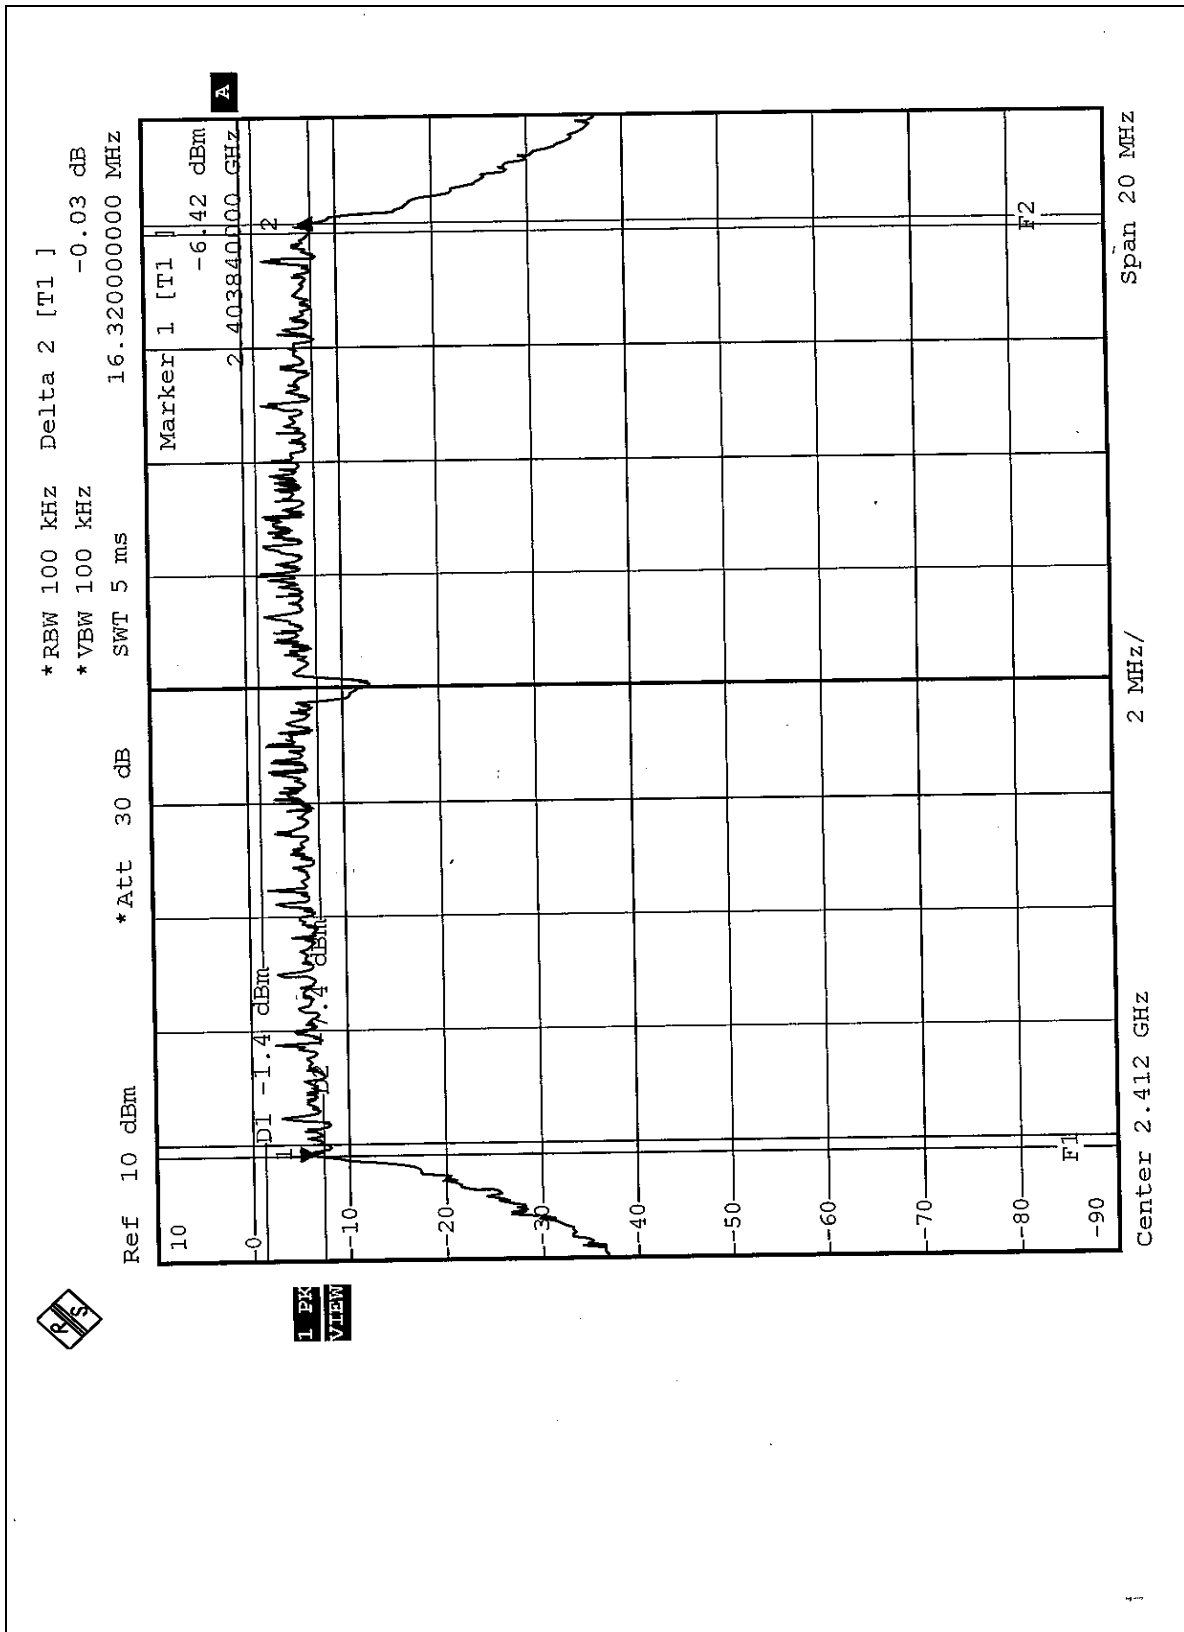

CH6

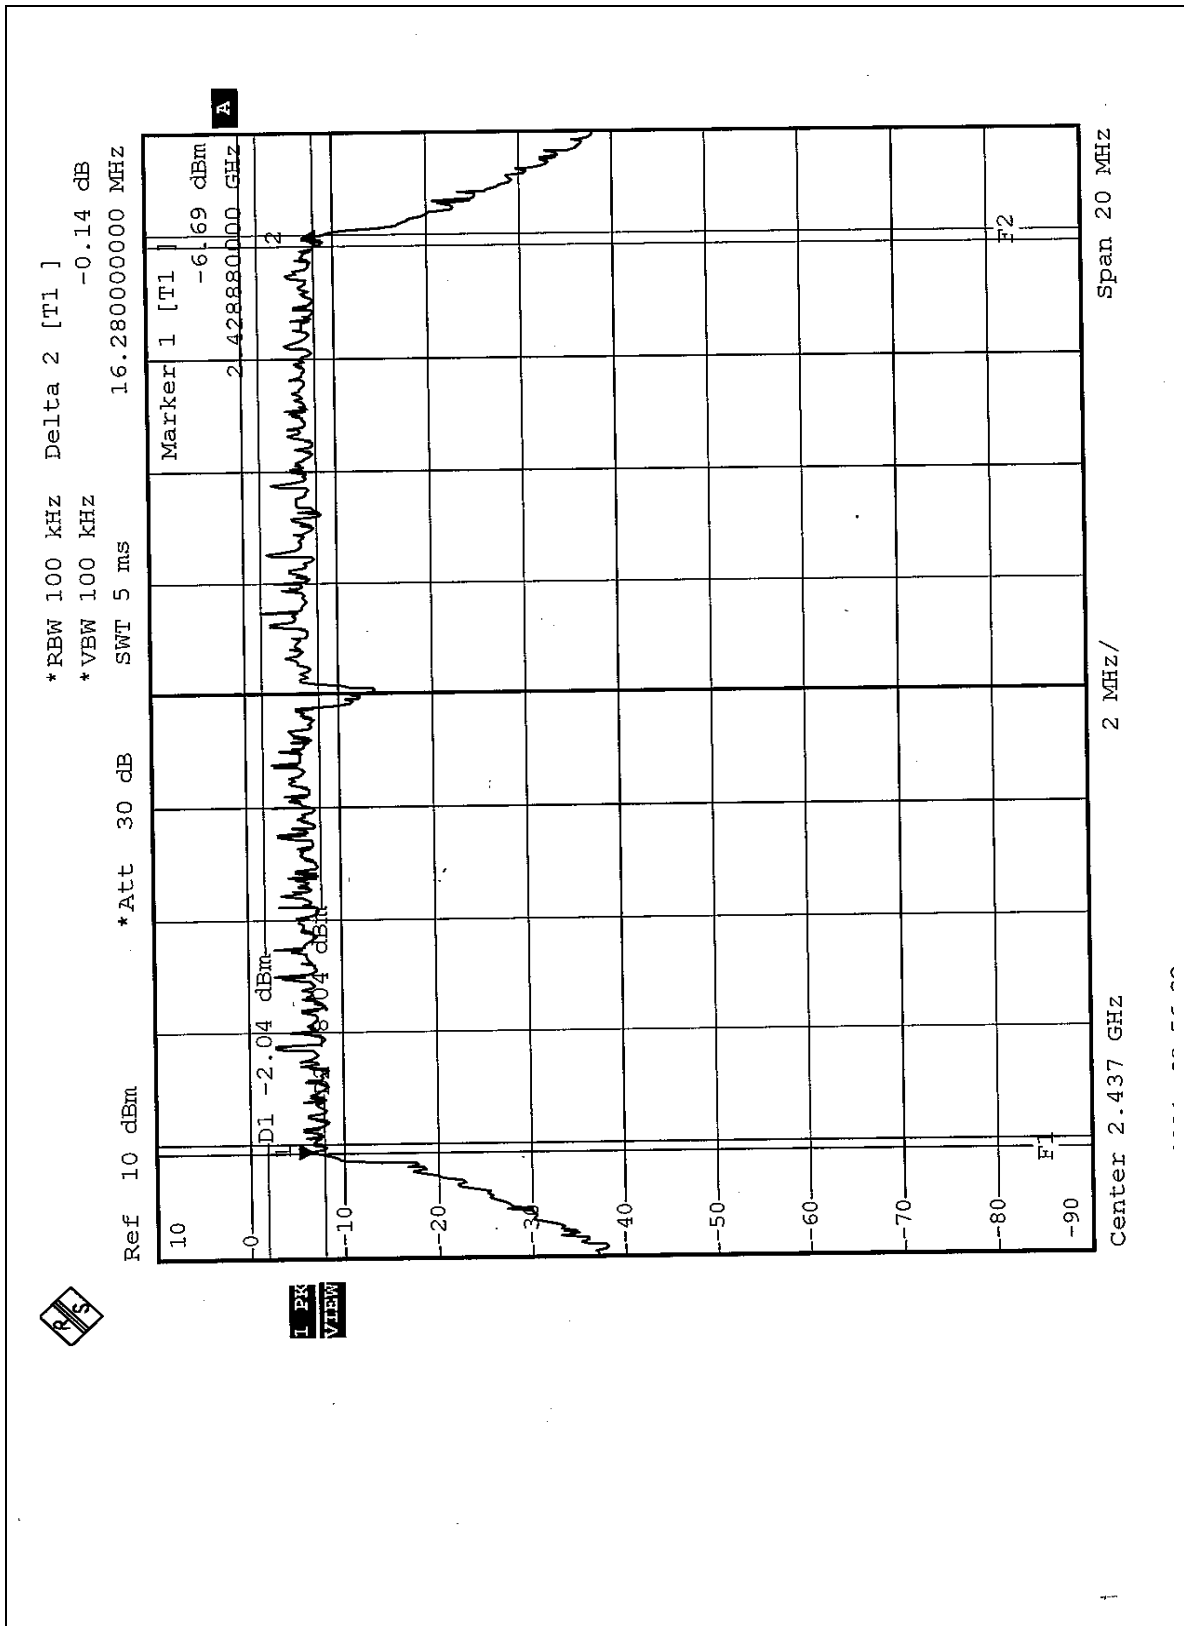

CH11

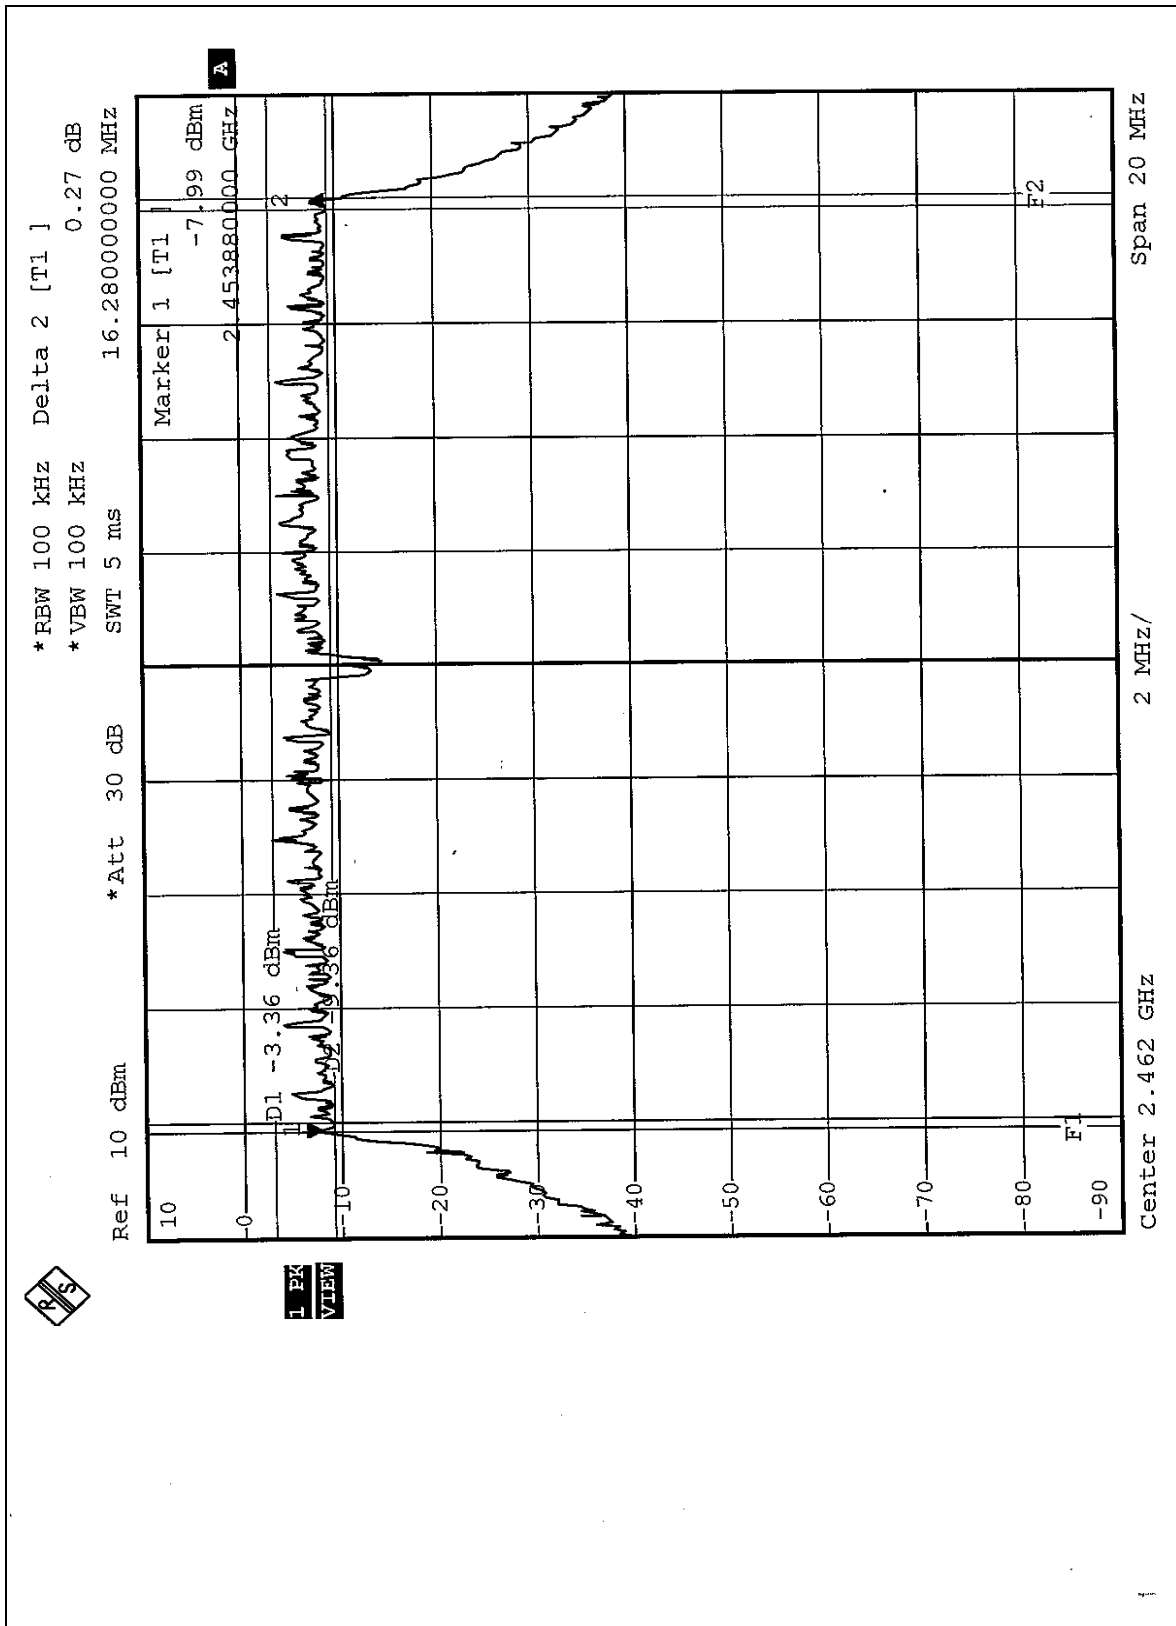


4.3.8 TEST RESULTS (B)


EUT	Wireless-G Access Point	MODEL	WAP54G v2
MODE	CCK	INPUT POWER (SYSTEM)	120 Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH, 991 hPa	TESTED BY	Gary Chang

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	10.92	0.5	PASS
6	2437	10.72	0.5	PASS
11	2462	10.64	0.5	PASS


CH1

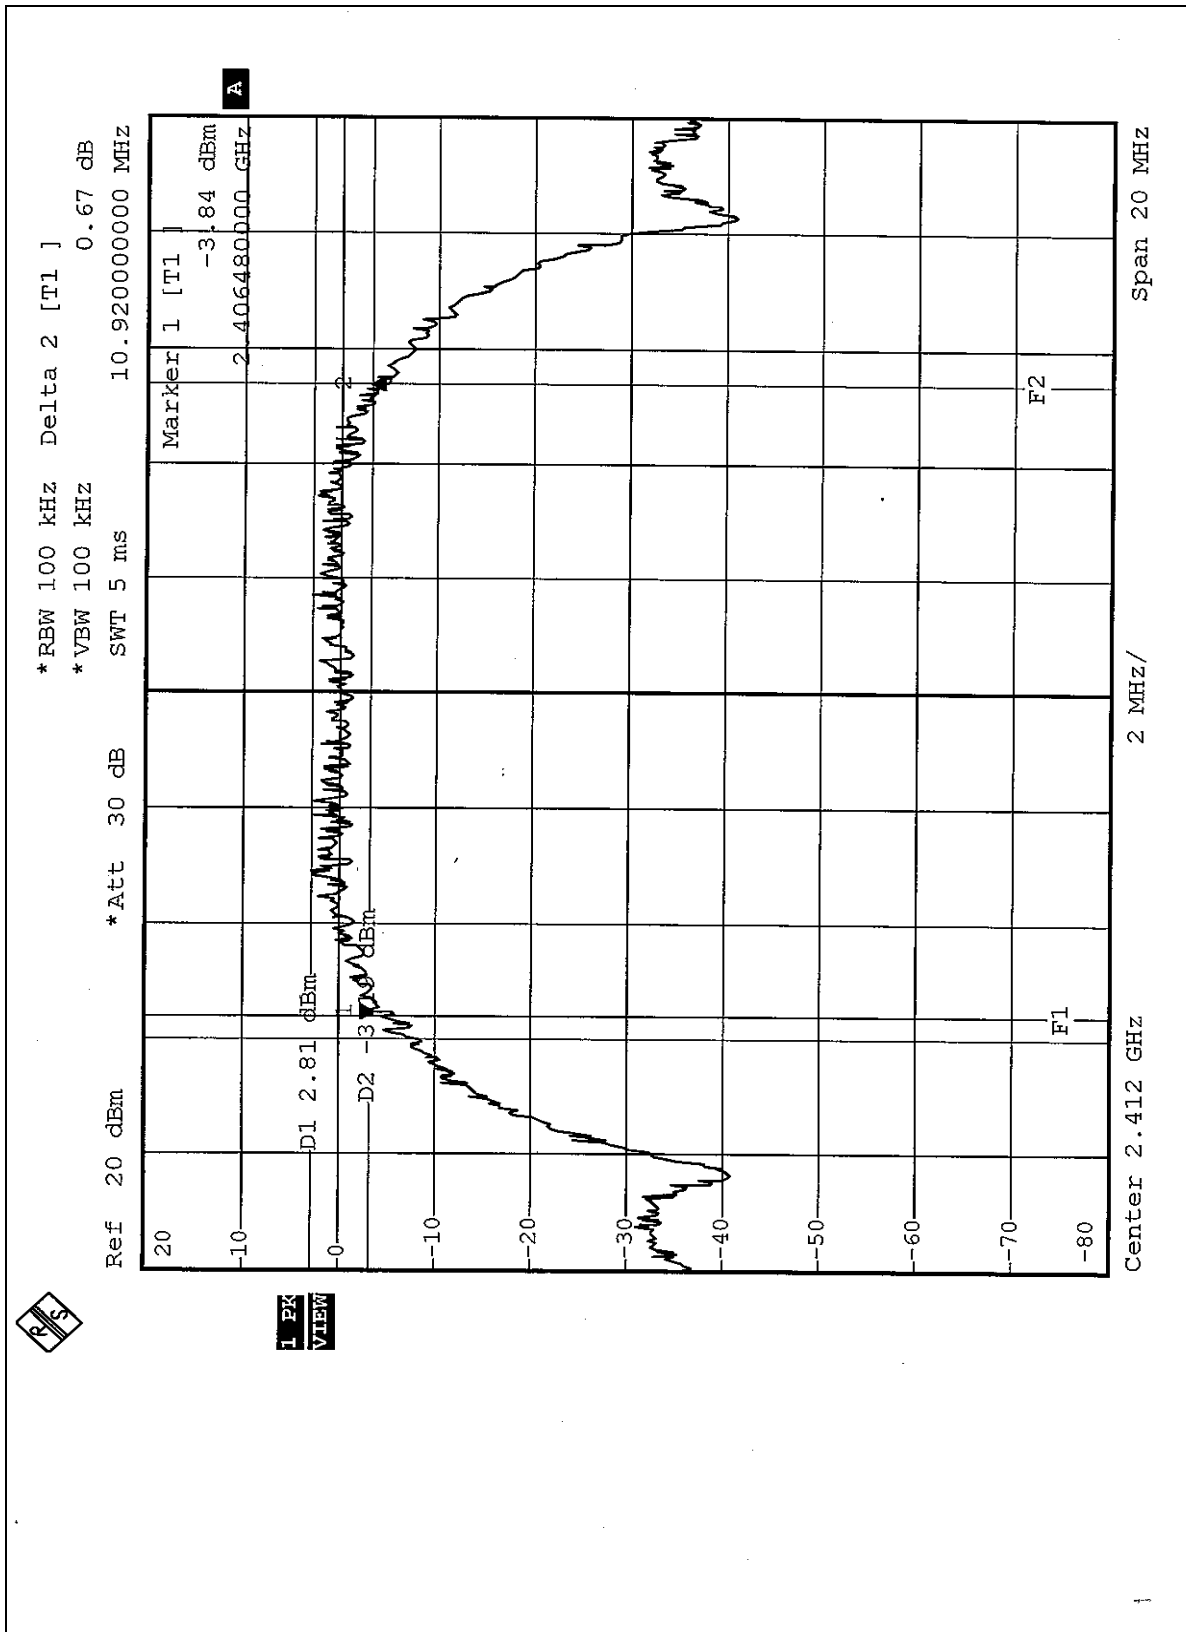

CH6

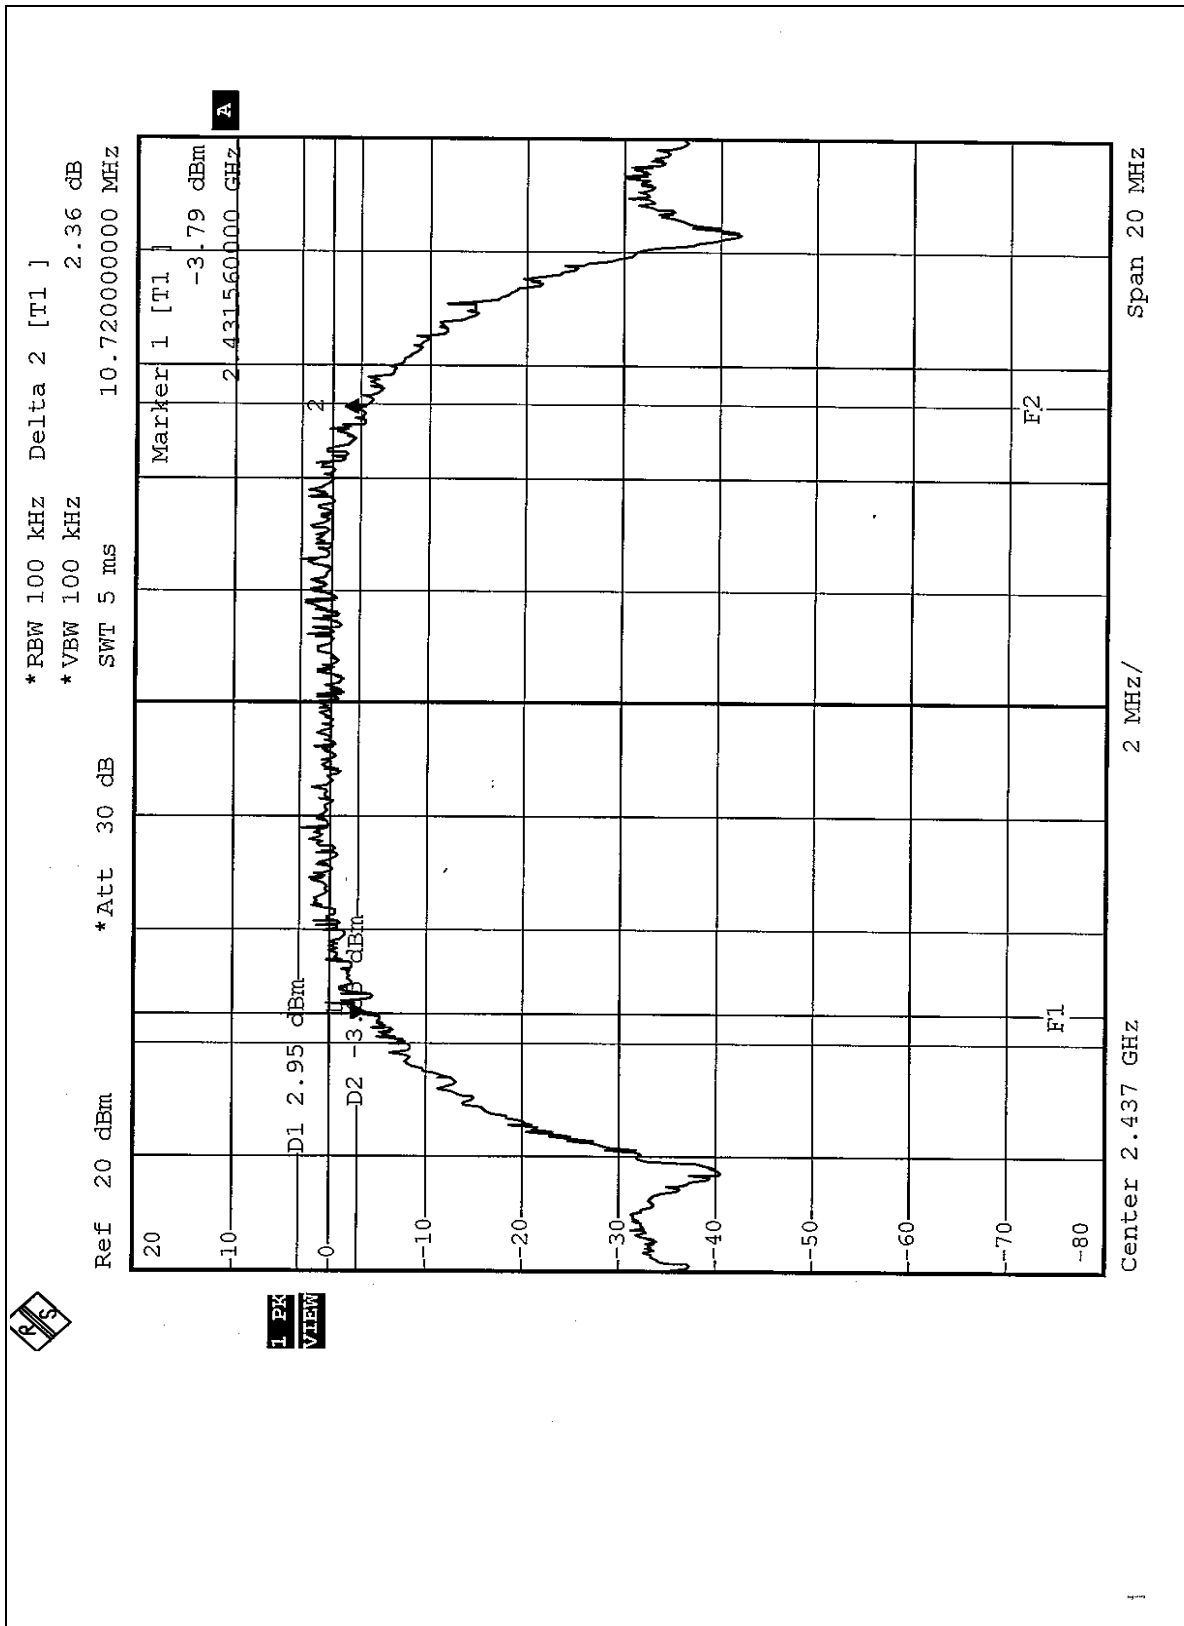

CH11

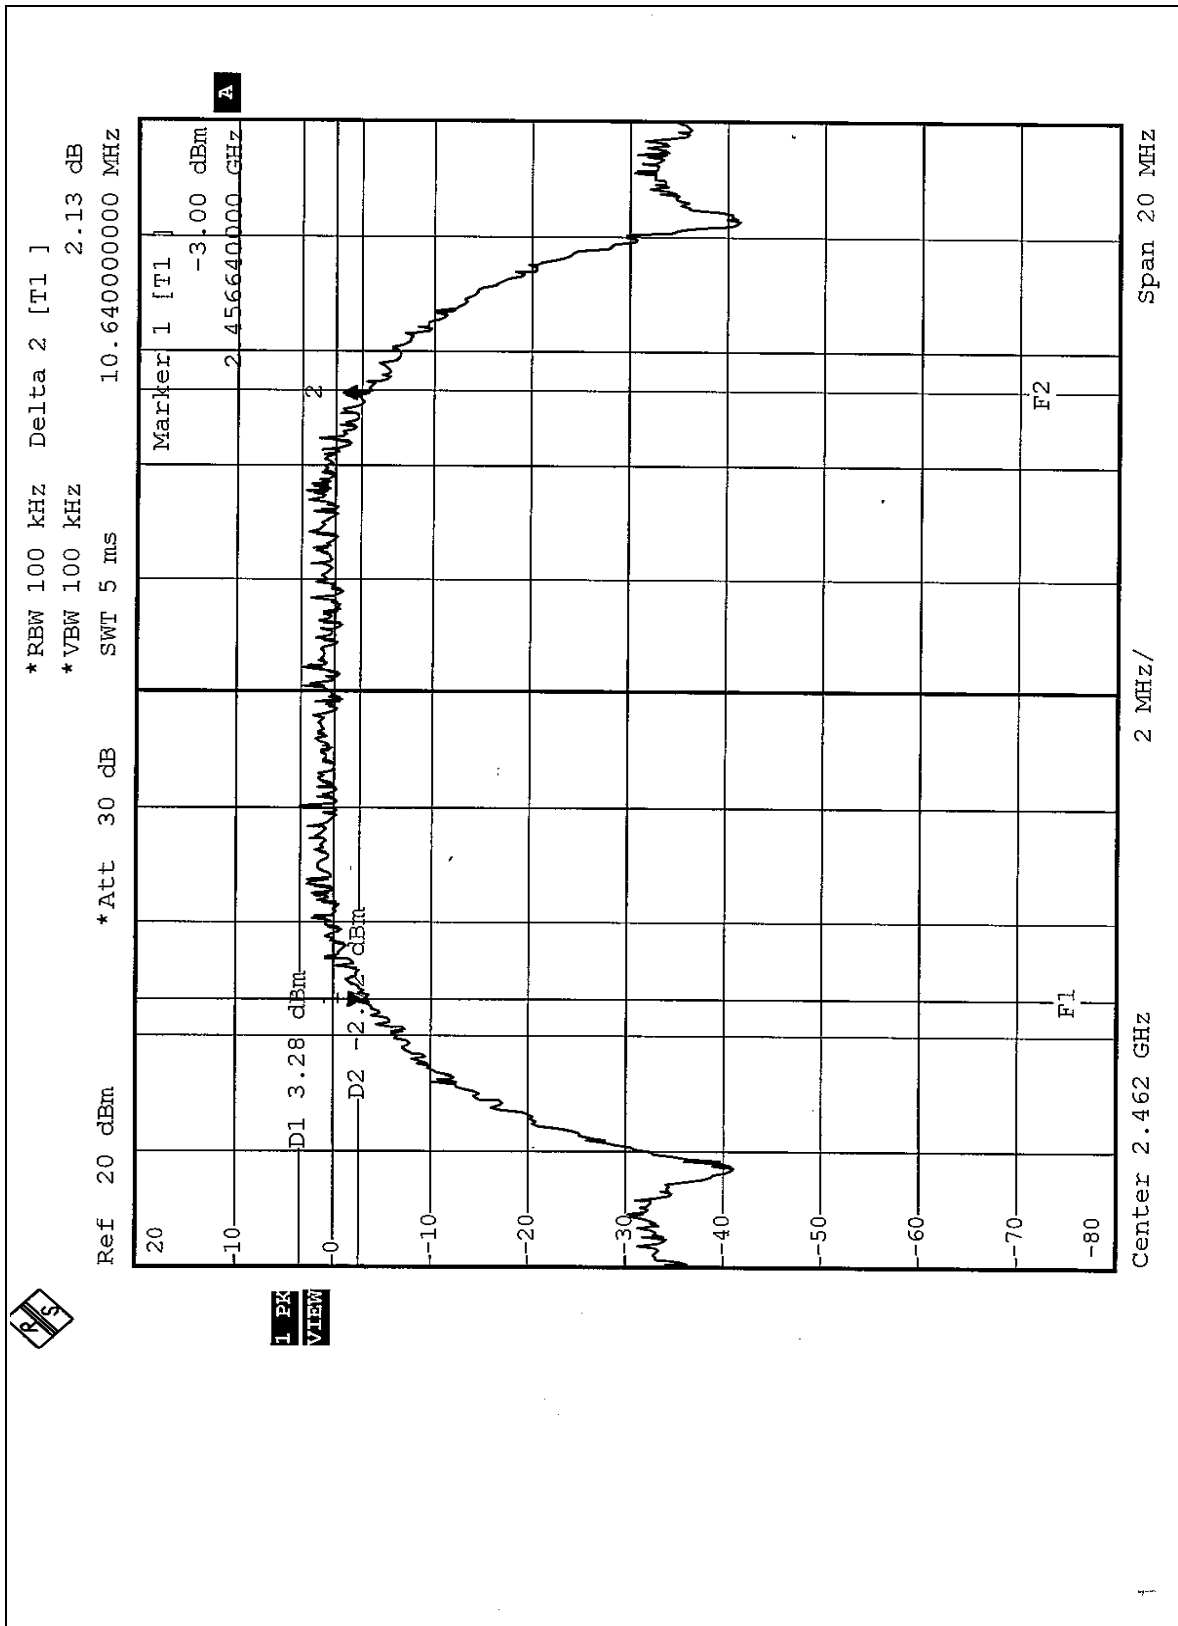





EUT	Wireless-G Access Point	MODEL	WAP54G v2
MODE	OFDM	INPUT POWER (SYSTEM)	120 Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH, 991 hPa	TESTED BY	Gary Chang

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.40	0.5	PASS
6	2437	16.44	0.5	PASS
11	2462	16.36	0.5	PASS


CH1

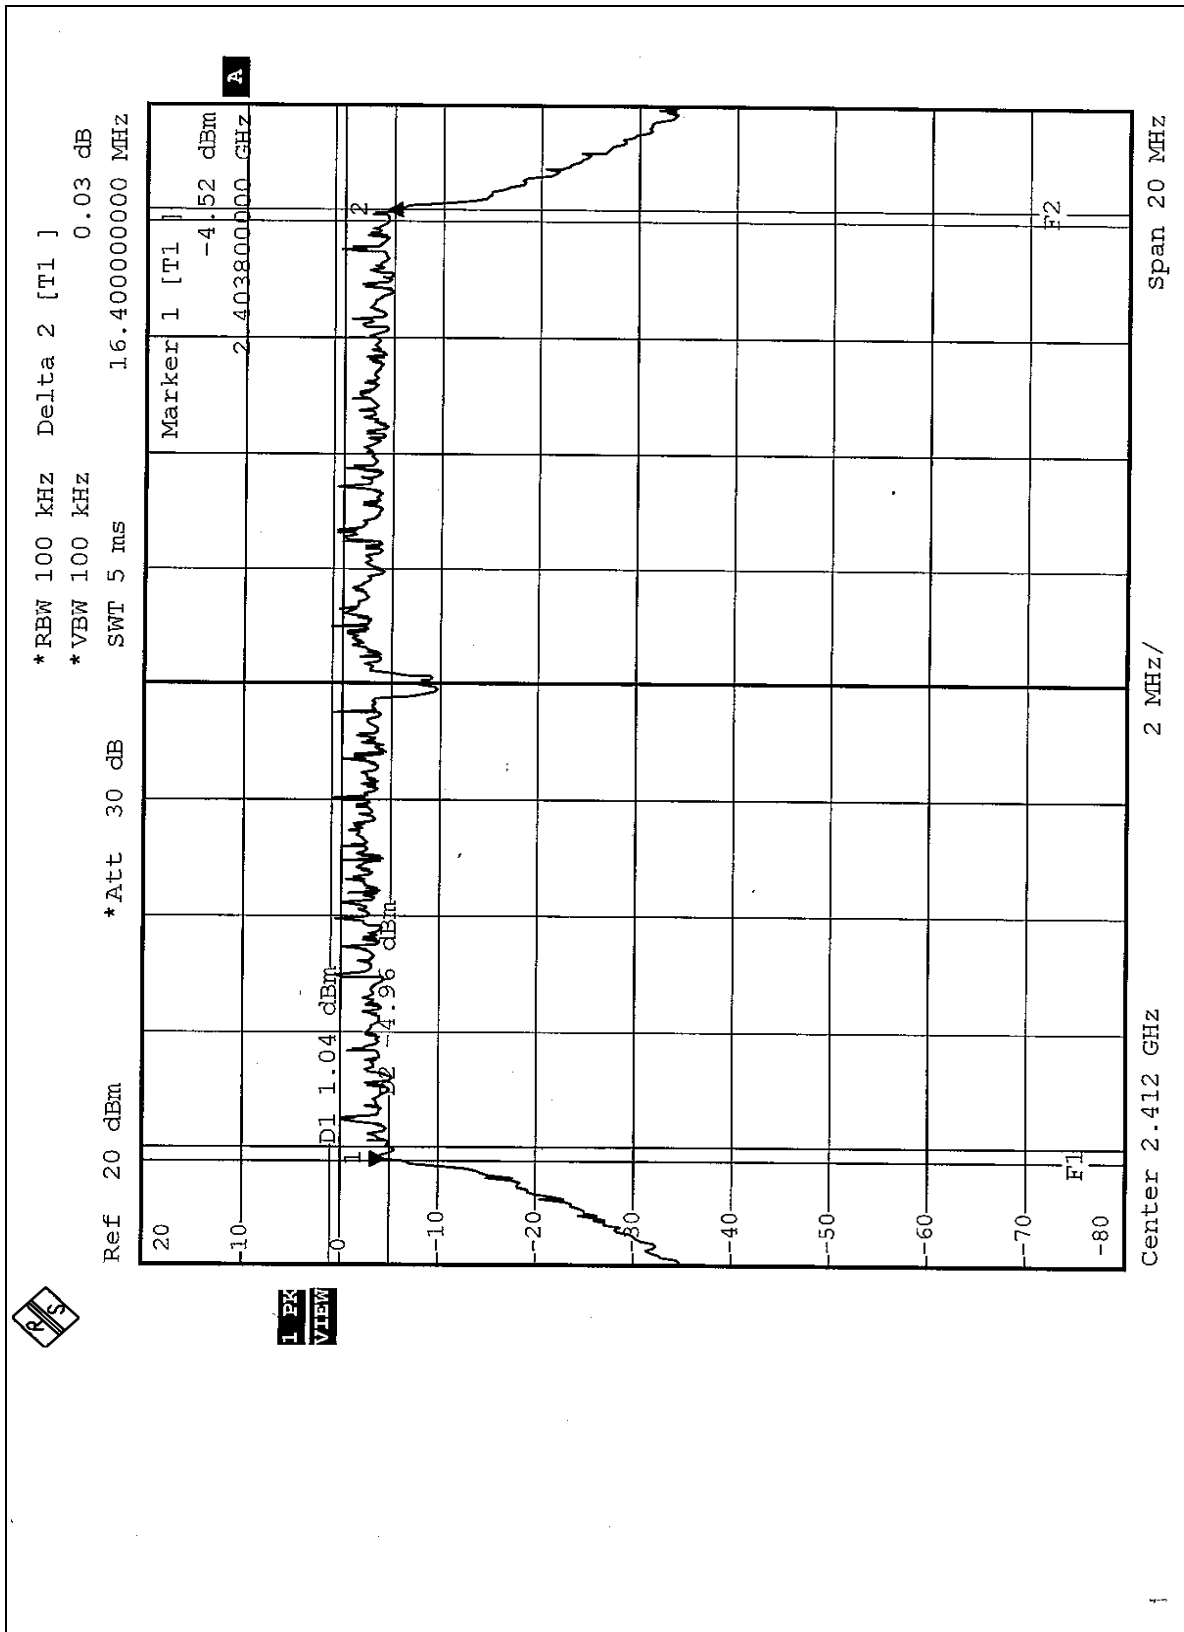

CH6

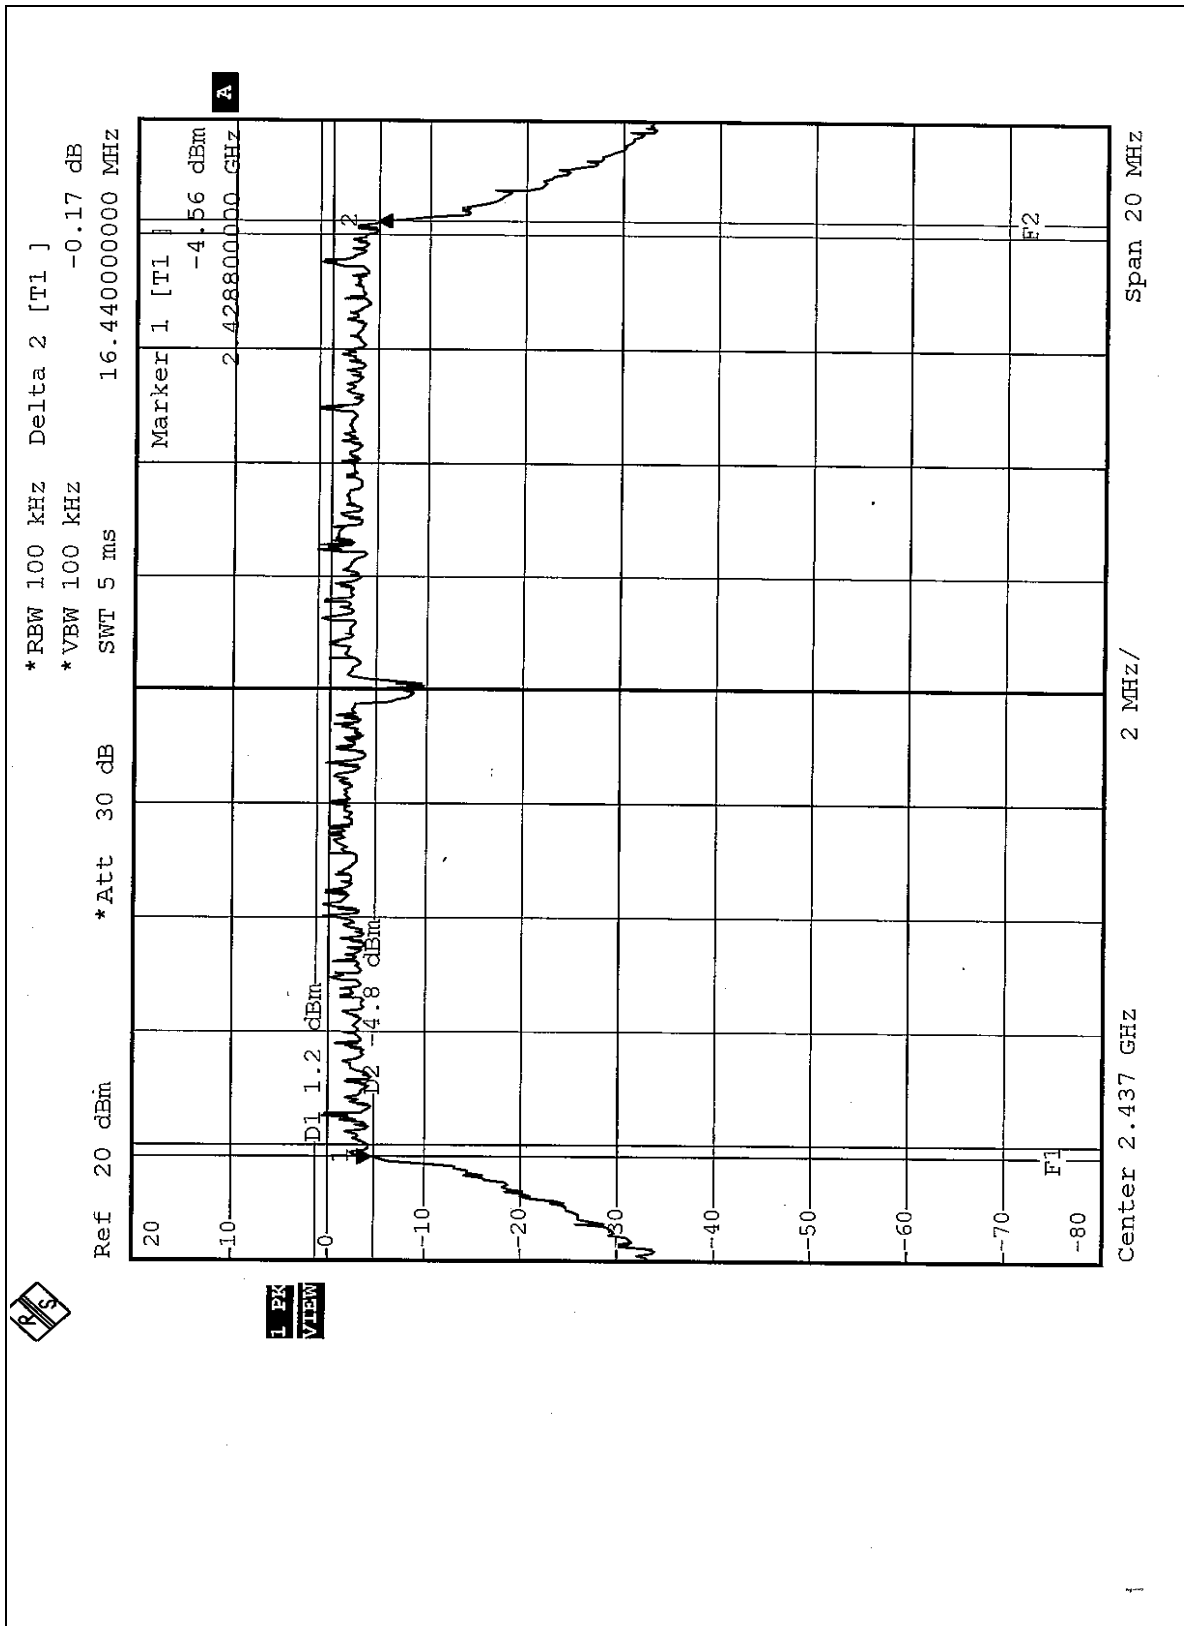

CH11

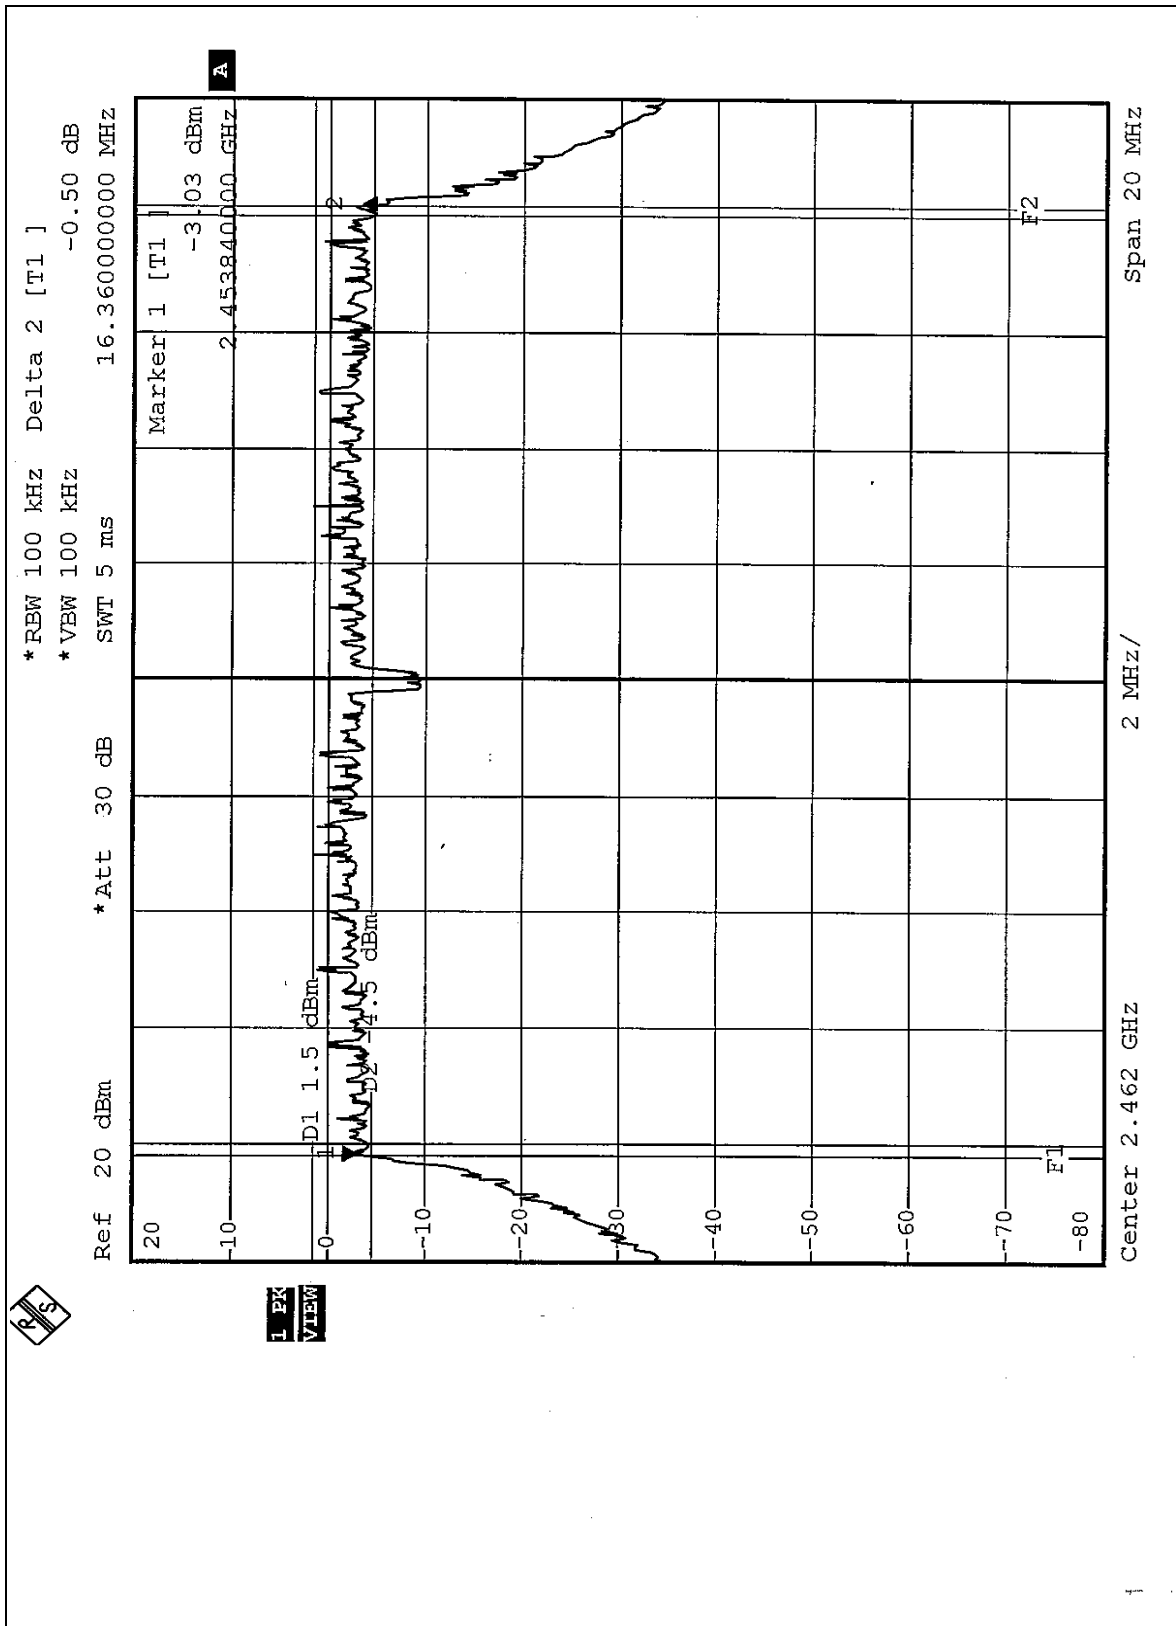

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004
R&S SIGNAL GENERATOR	SMP04	100011	May 28, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	C019167	Feb. 01, 2005
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G. was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS (A & B)

EUT	Wireless-G Access Point	MODEL	WAP54G v2
MODE	CCK	INPUT POWER (SYSTEM)	120 Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH, 991 hPa	TESTED BY	Gary Chang

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	13.00	29	PASS
6	2437	13.00	29	PASS
11	2462	11.50	29	PASS

EUT	Wireless-G Access Point	MODEL	WAP54G v2
MODE	OFDM	INPUT POWER (SYSTEM)	120 Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH, 991 hPa	TESTED BY	Gary Chang

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	14.00	29	PASS
6	2437	13.00	29	PASS
11	2462	11.50	29	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS


Same as 4.3.6

4.5.7 TEST RESULTS (A)


EUT	Wireless-G Access Point	MODEL	WAP54G v2
MODE	CCK	INPUT POWER (SYSTEM)	120 Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH, 991 hPa	TESTED BY	Gary Chang

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-13.39	8	PASS
6	2437	-13.74	8	PASS
11	2462	-14.55	8	PASS


CH1

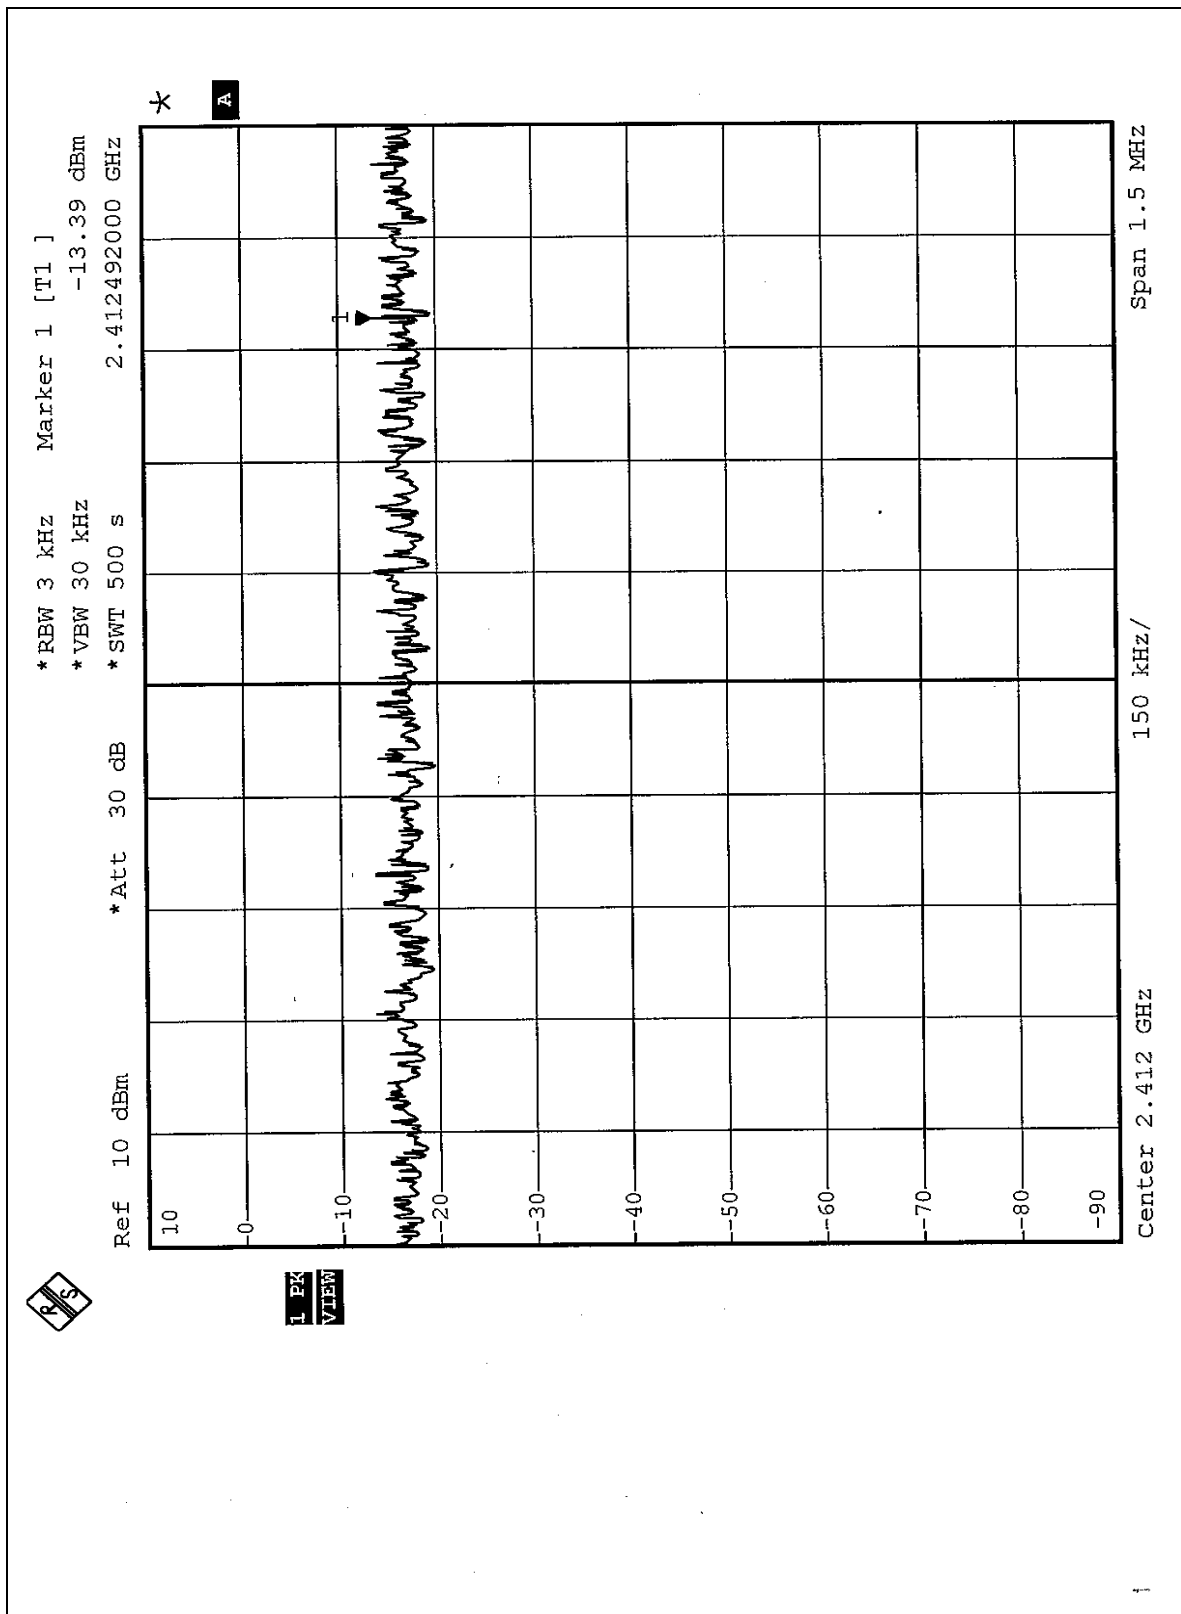

CH6

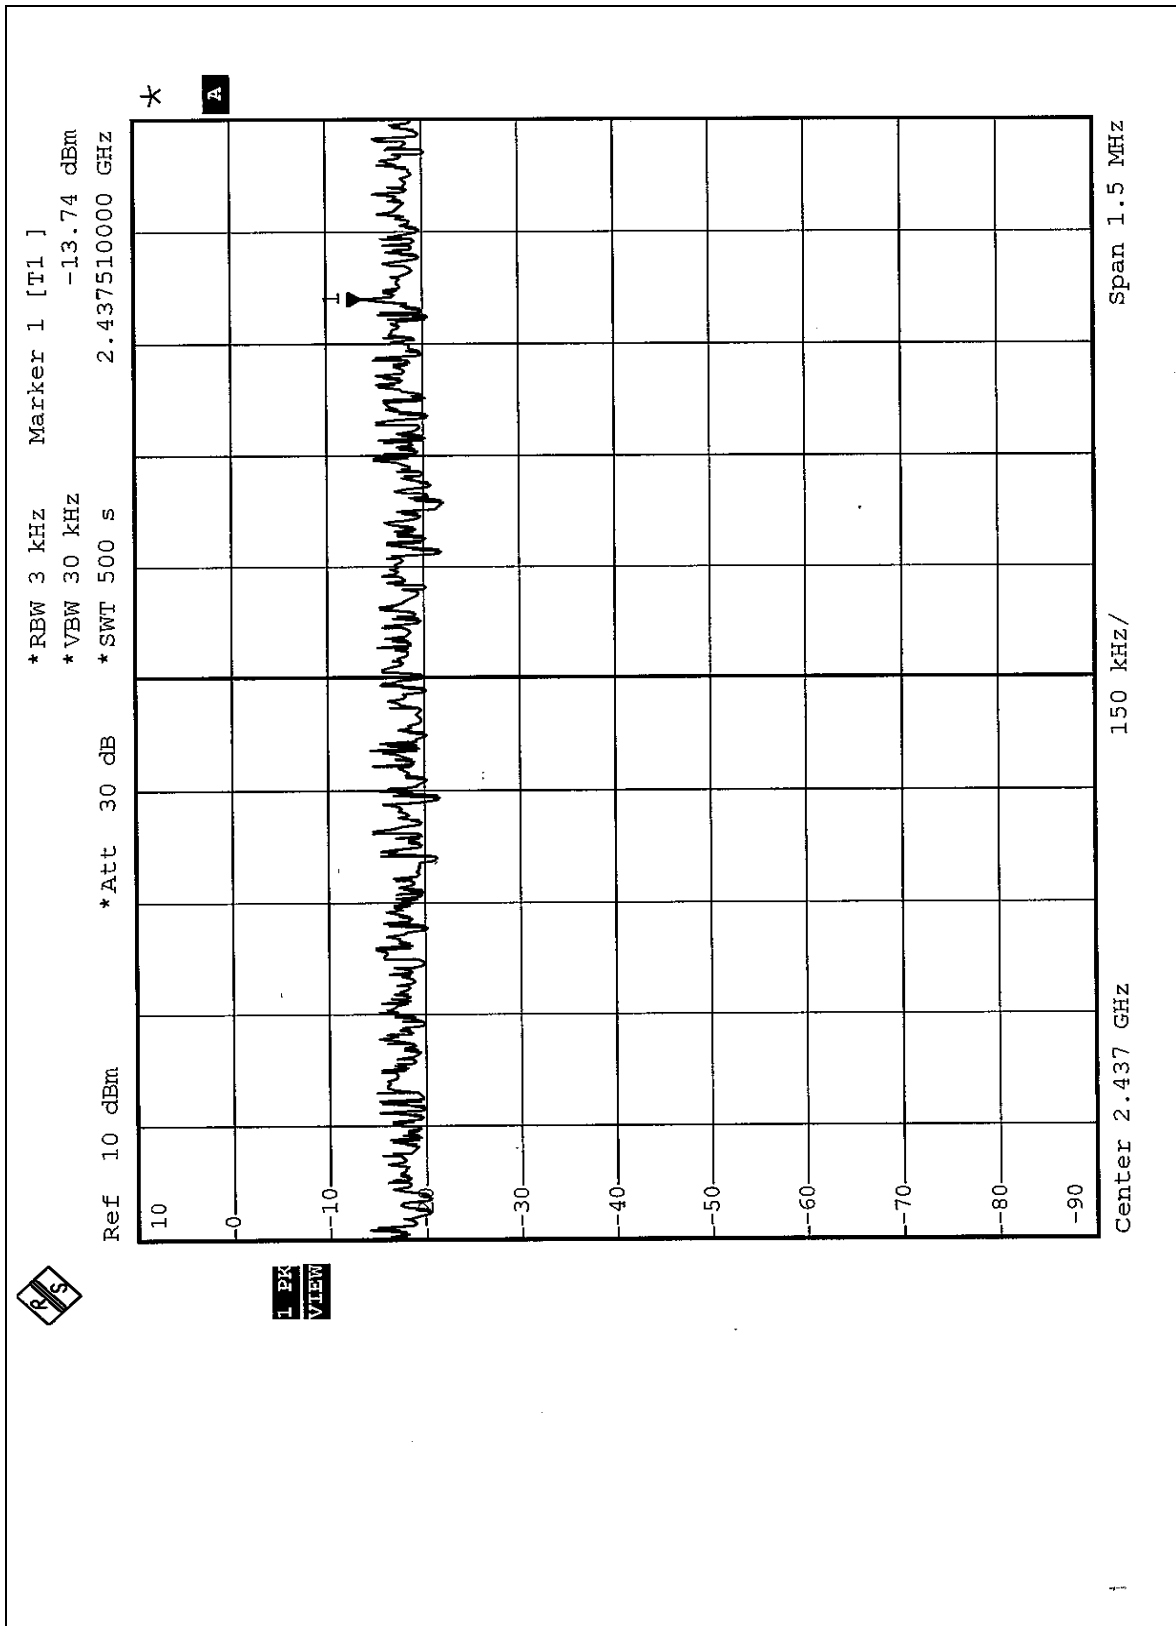

CH11

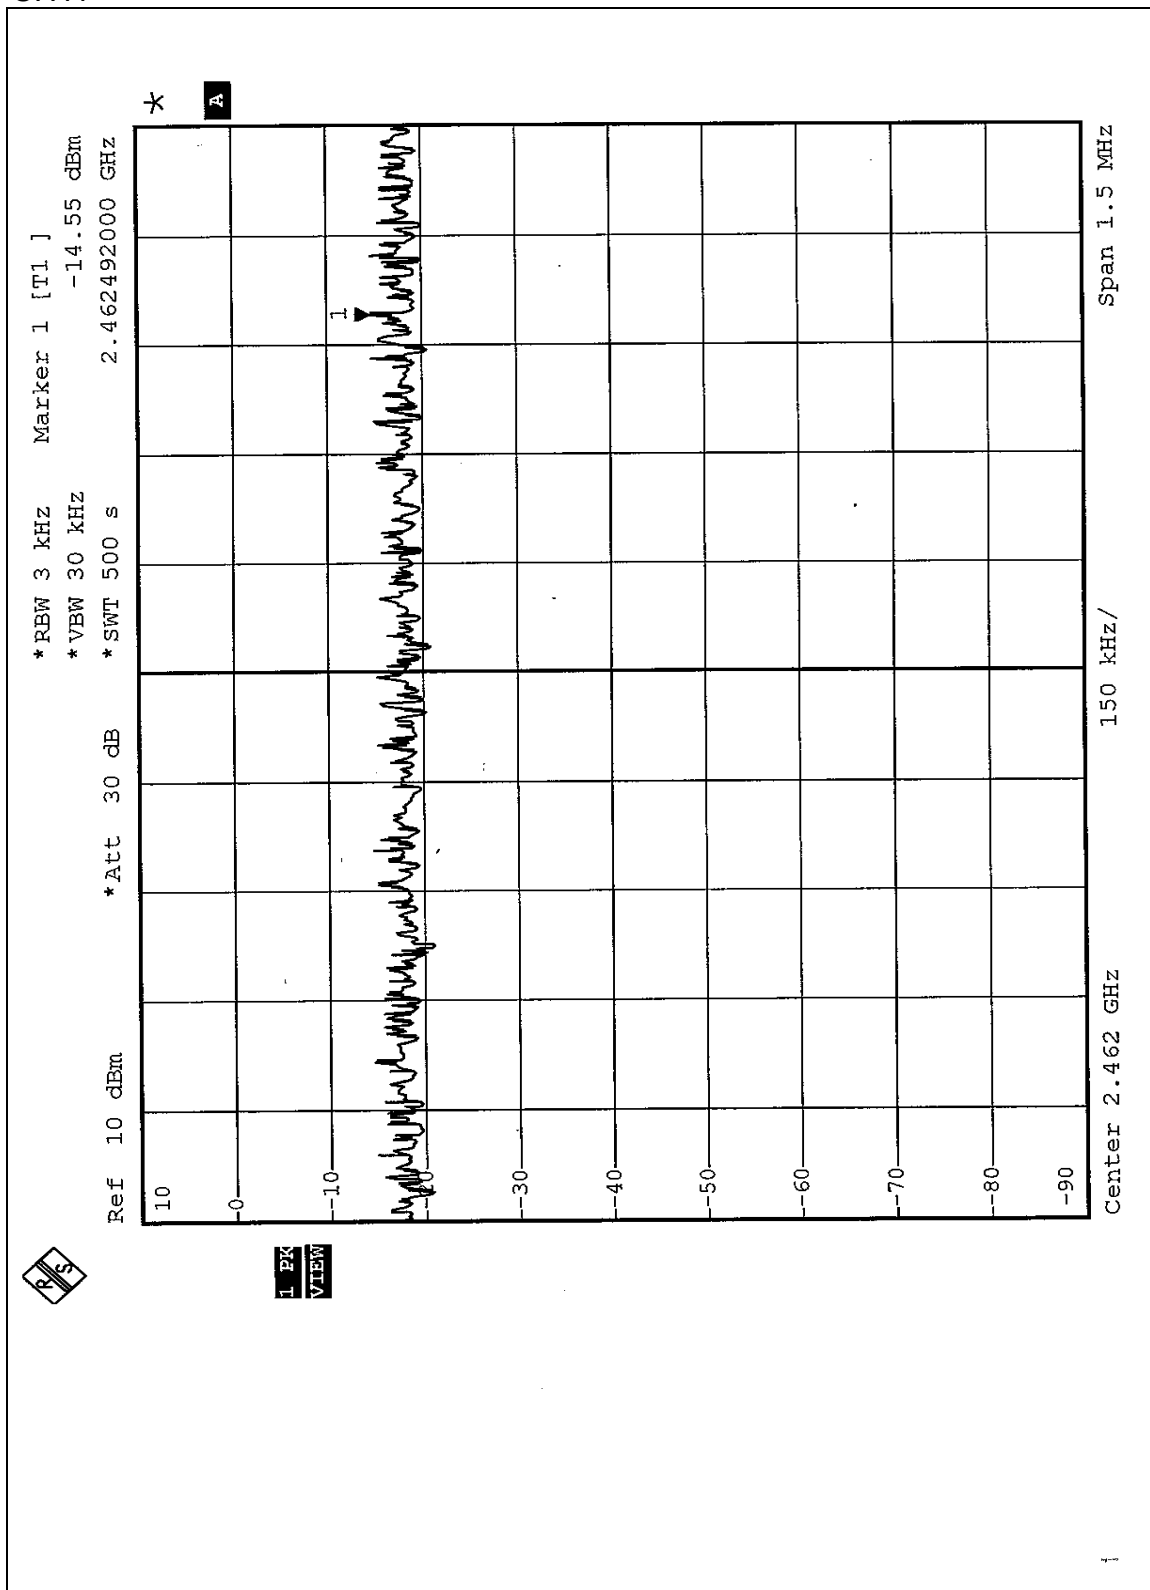





EUT	Wireless-G Access Point	MODEL	WAP54G v2
MODE	OFDM	INPUT POWER (SYSTEM)	120 Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH, 991 hPa	TESTED BY	Gary Chang

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-15.48	8	PASS
6	2437	-16.14	8	PASS
11	2462	-16.41	8	PASS


CH1

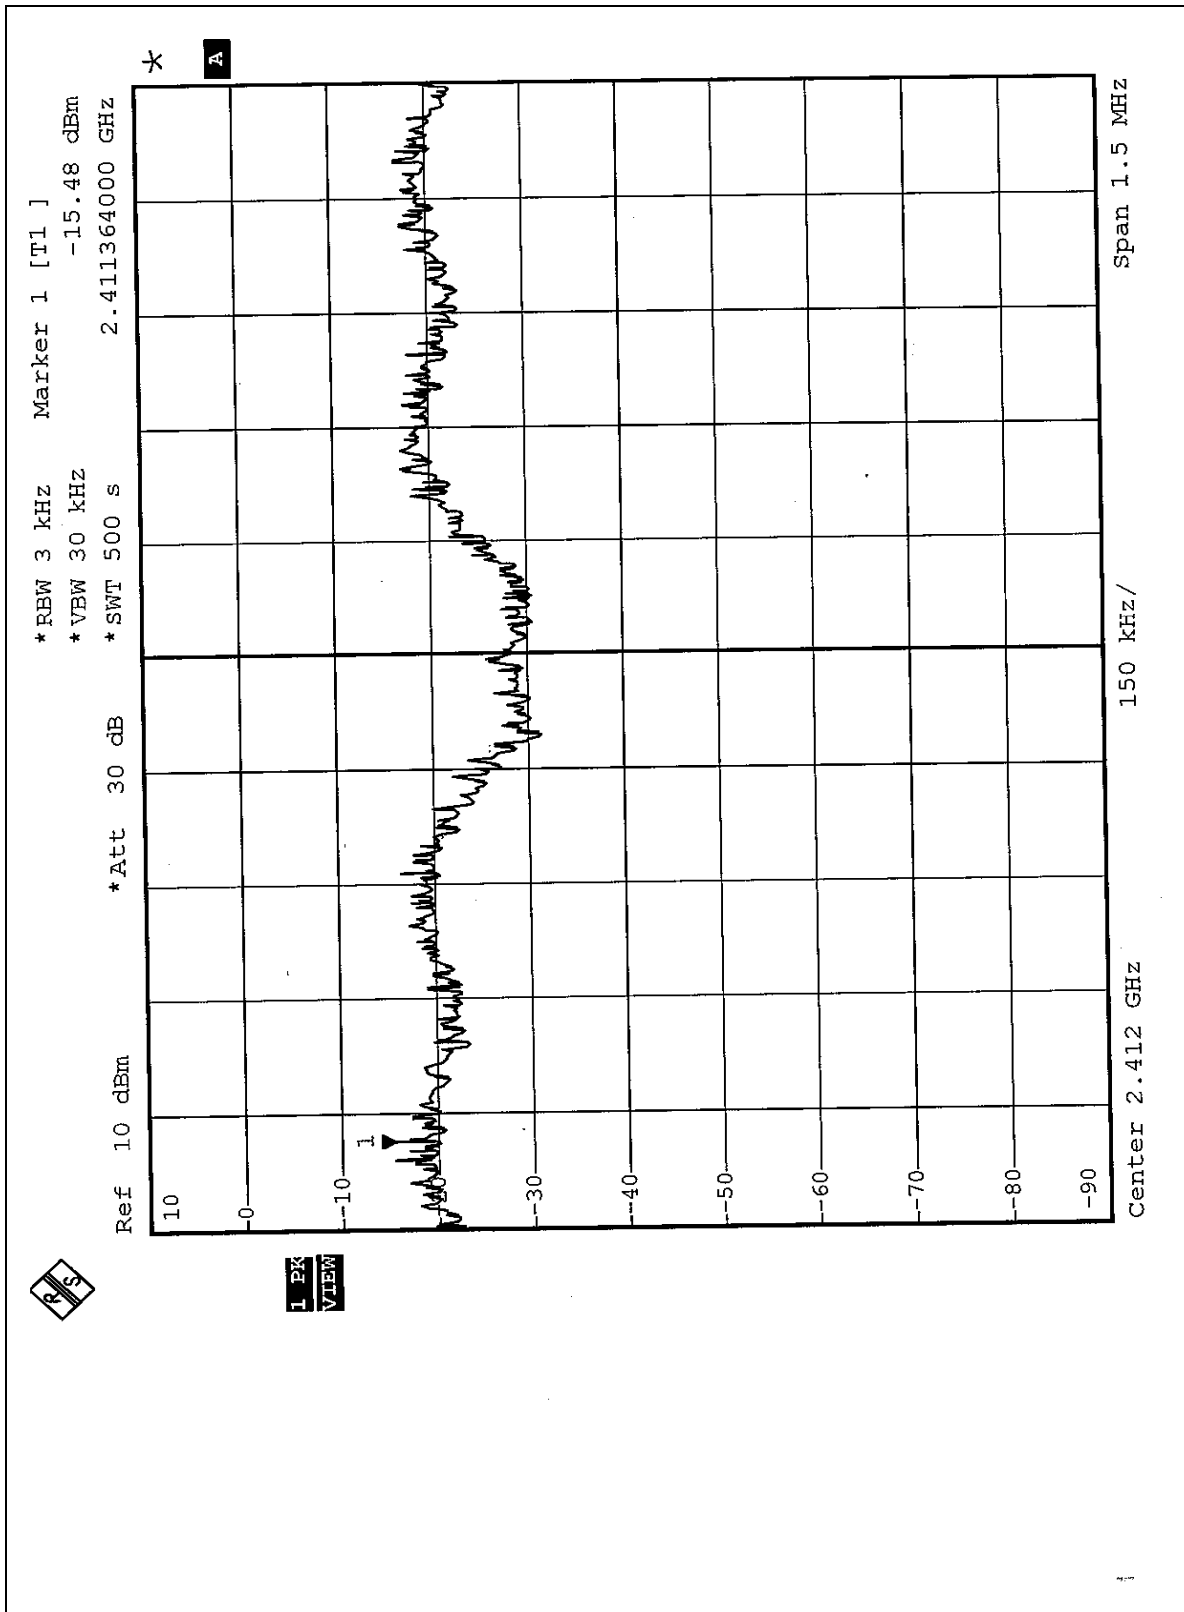

CH6

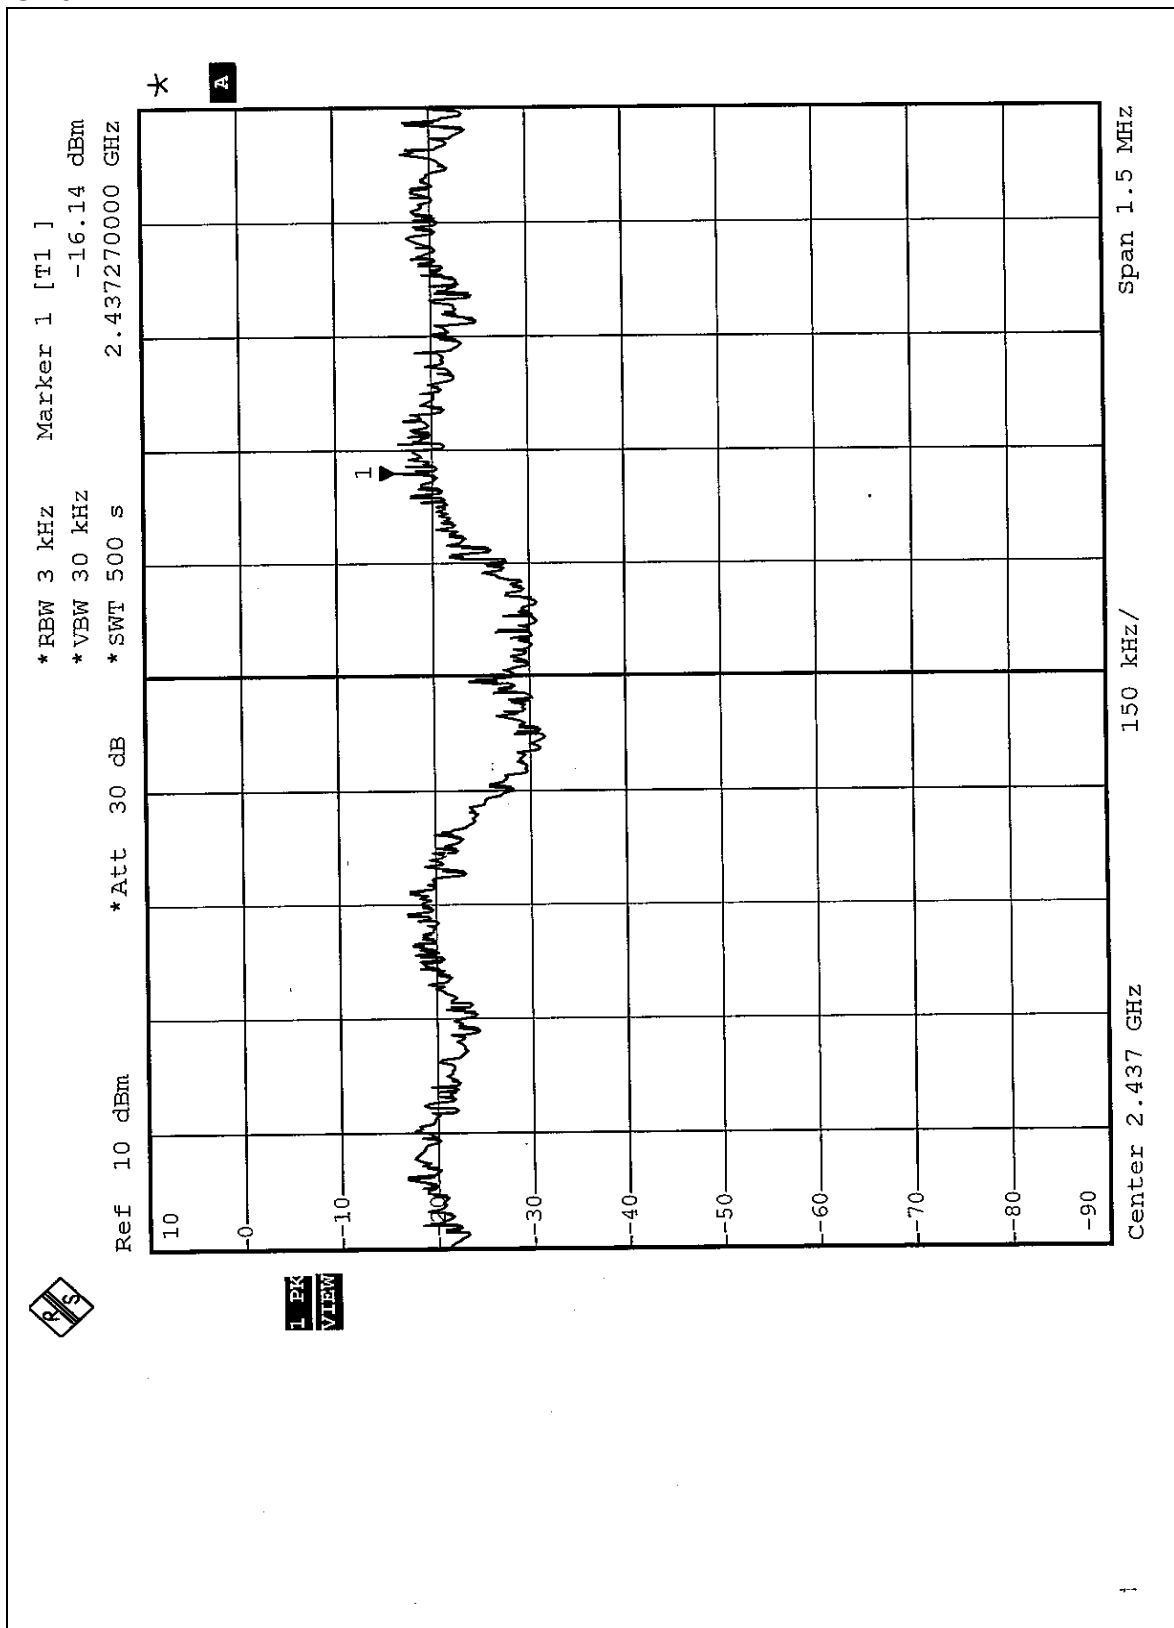

CH11

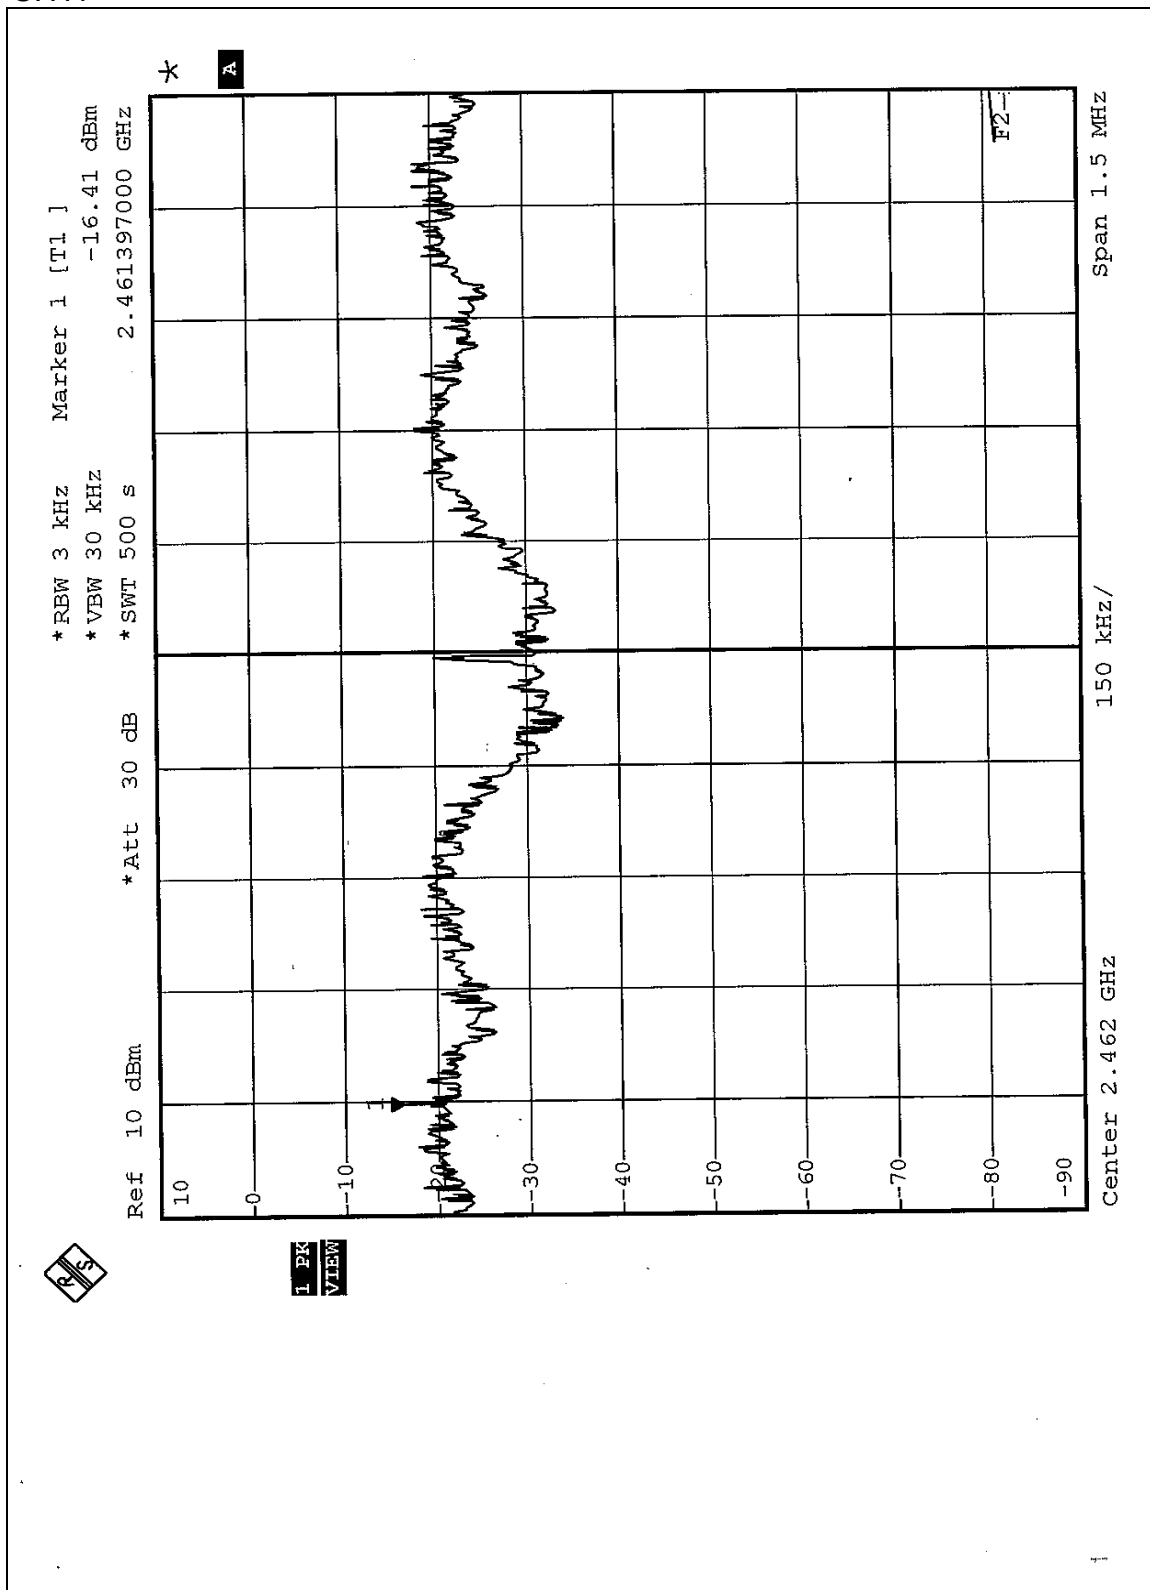


4.5.8 TEST RESULTS (B)


EUT	Wireless-G Access Point	MODEL	WAP54G v2
MODE	CCK	INPUT POWER (SYSTEM)	120 Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH, 991 hPa	TESTED BY	Gary Chang

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-10.62	8	PASS
6	2437	-10.74	8	PASS
11	2462	-10.59	8	PASS


CH1

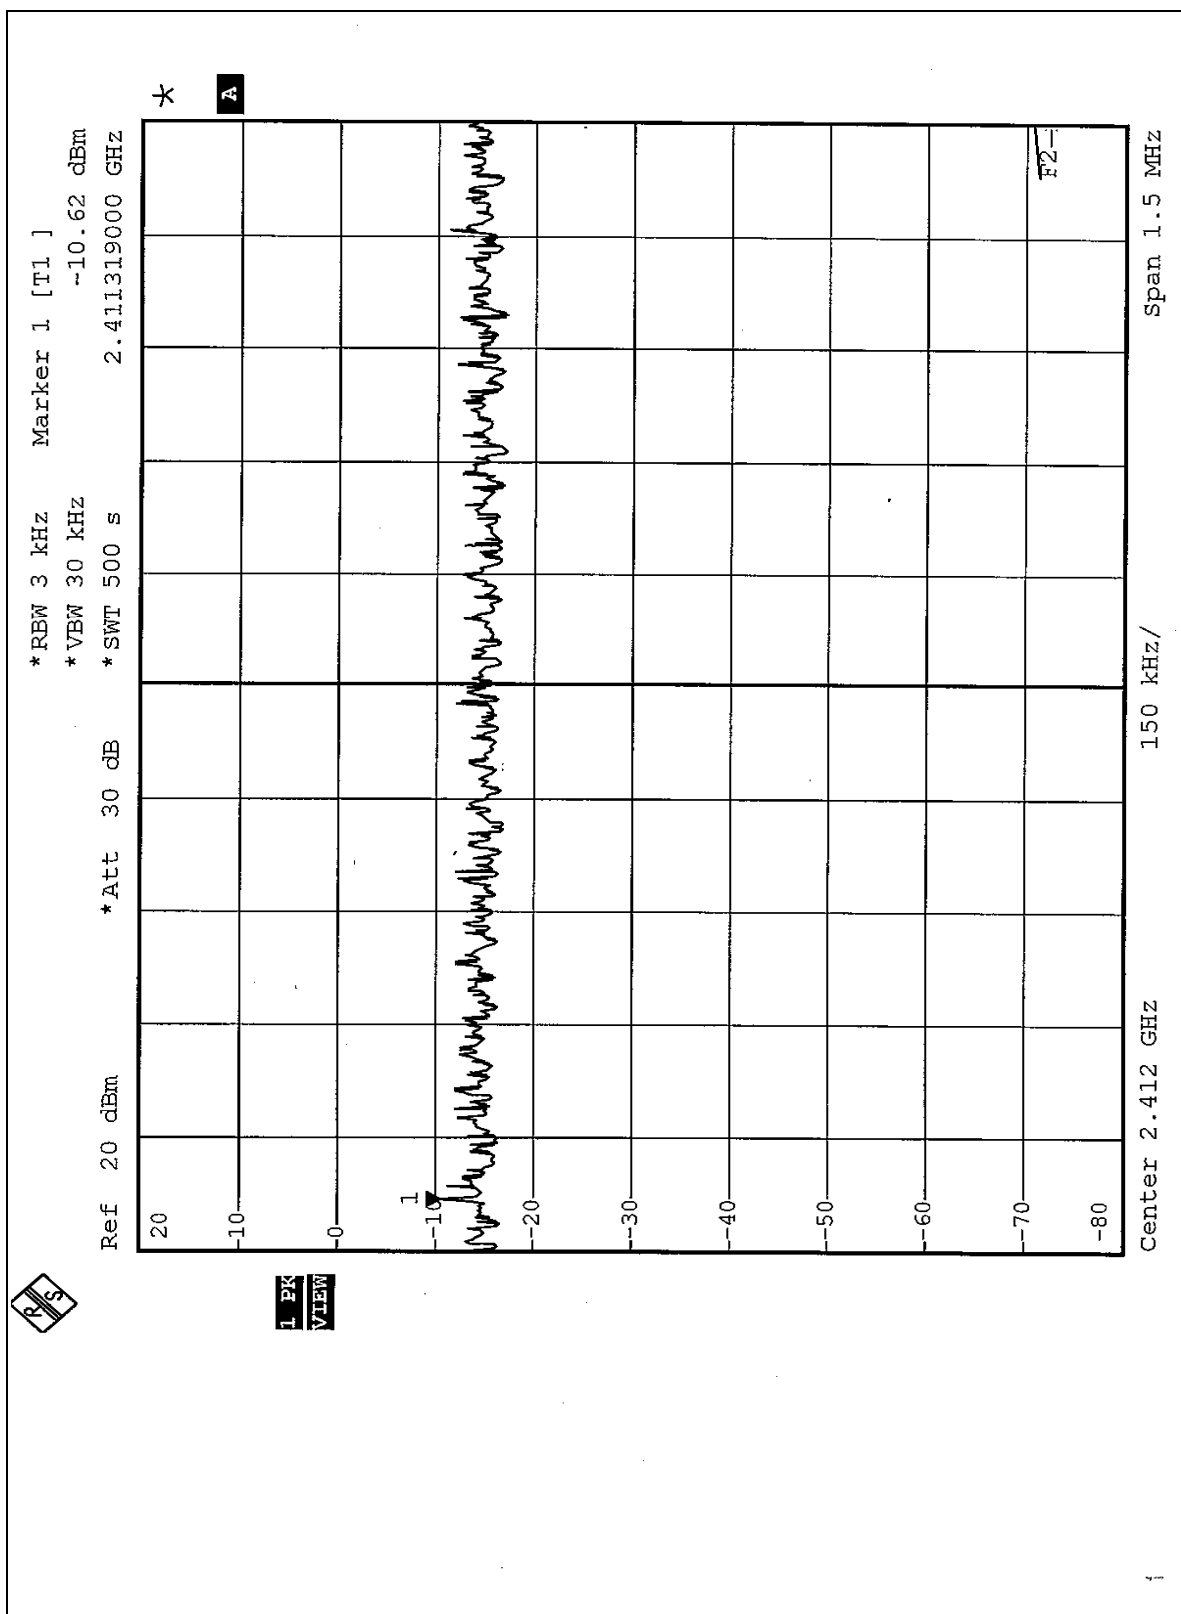

CH6

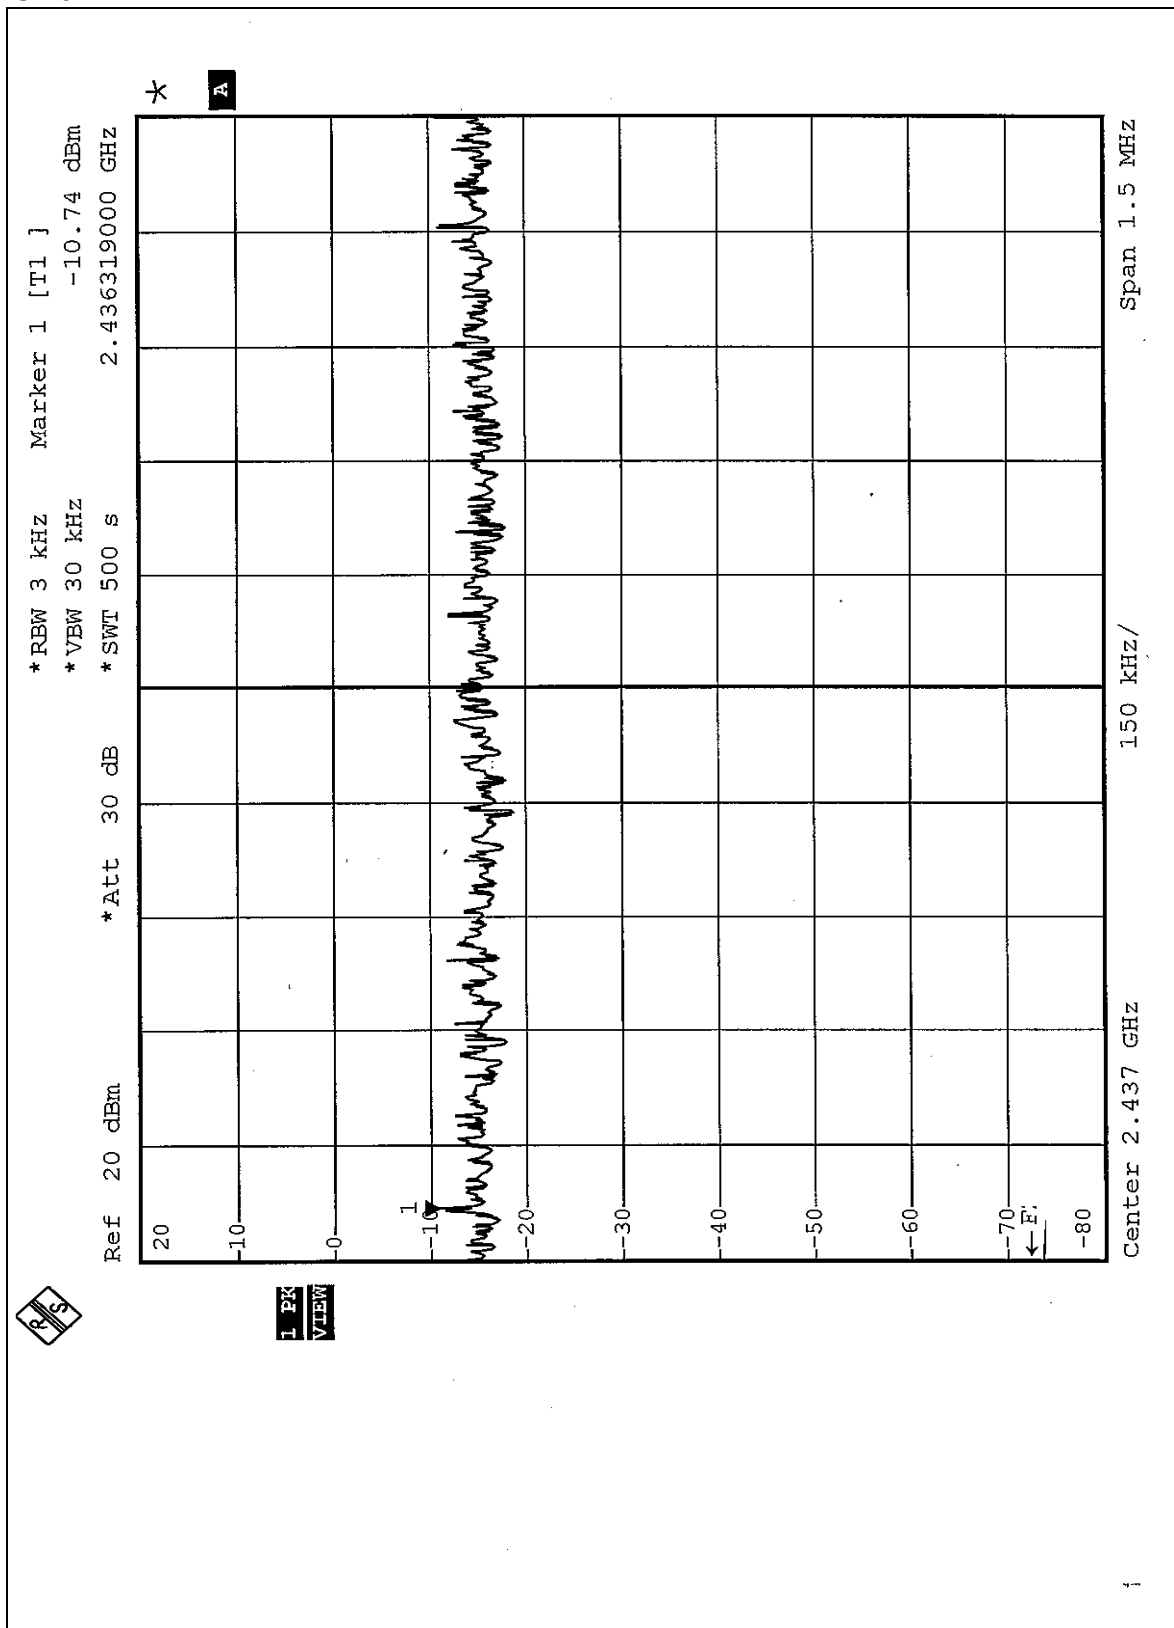

CH11

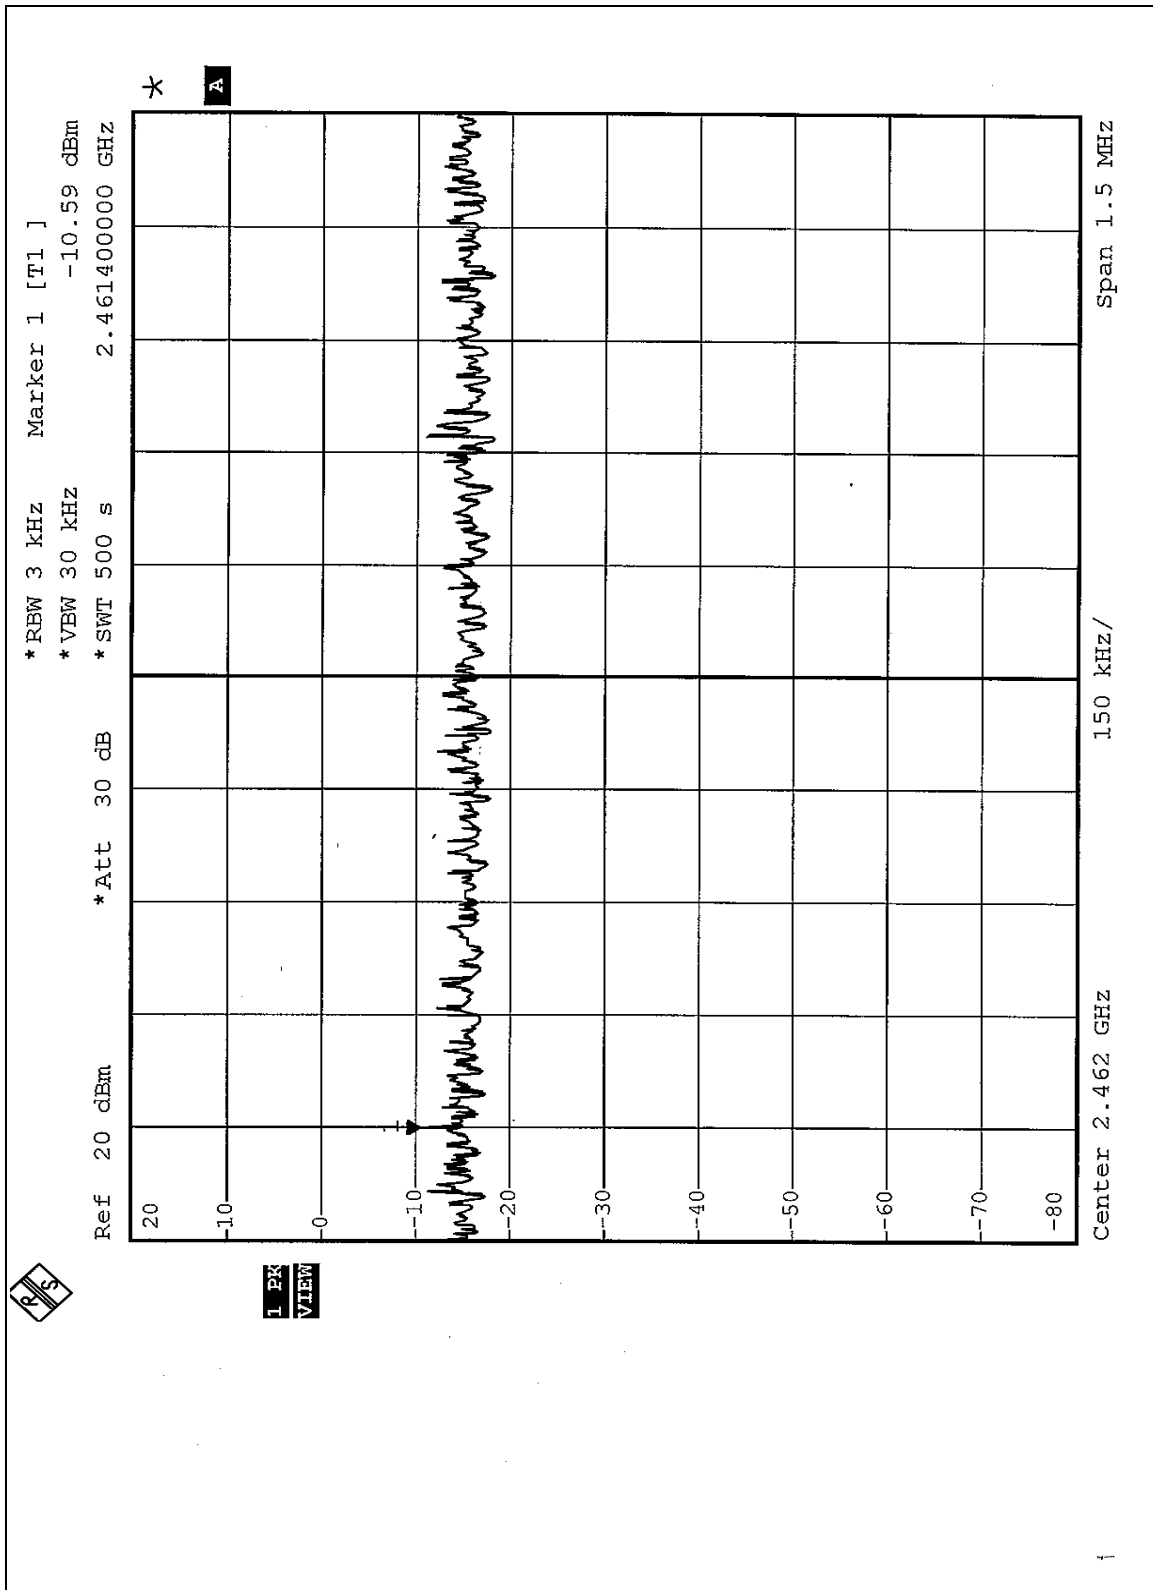





EUT	Wireless-G Access Point	MODEL	WAP54G v2
MODE	OFDM	INPUT POWER (SYSTEM)	120 Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH, 991 hPa	TESTED BY	Gary Chang

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-13.22	8	PASS
6	2437	-12.25	8	PASS
11	2462	-13.21	8	PASS


CH1

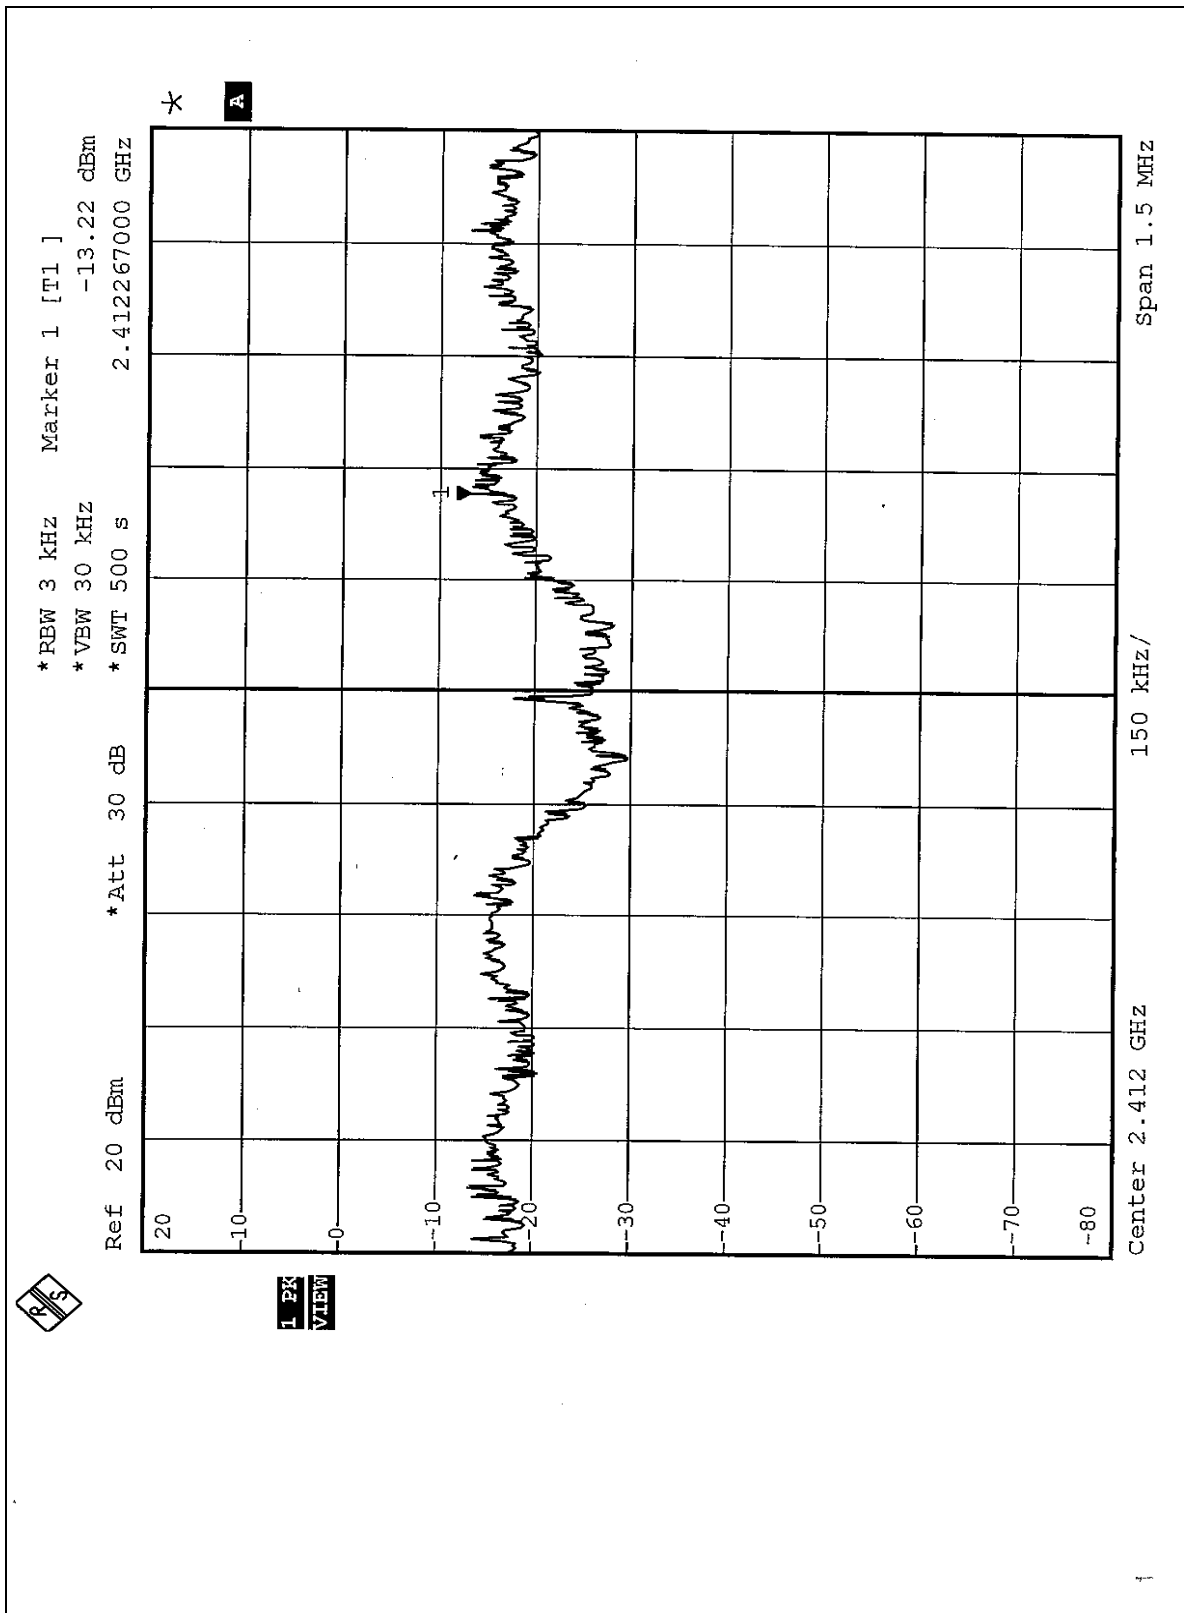

CH6

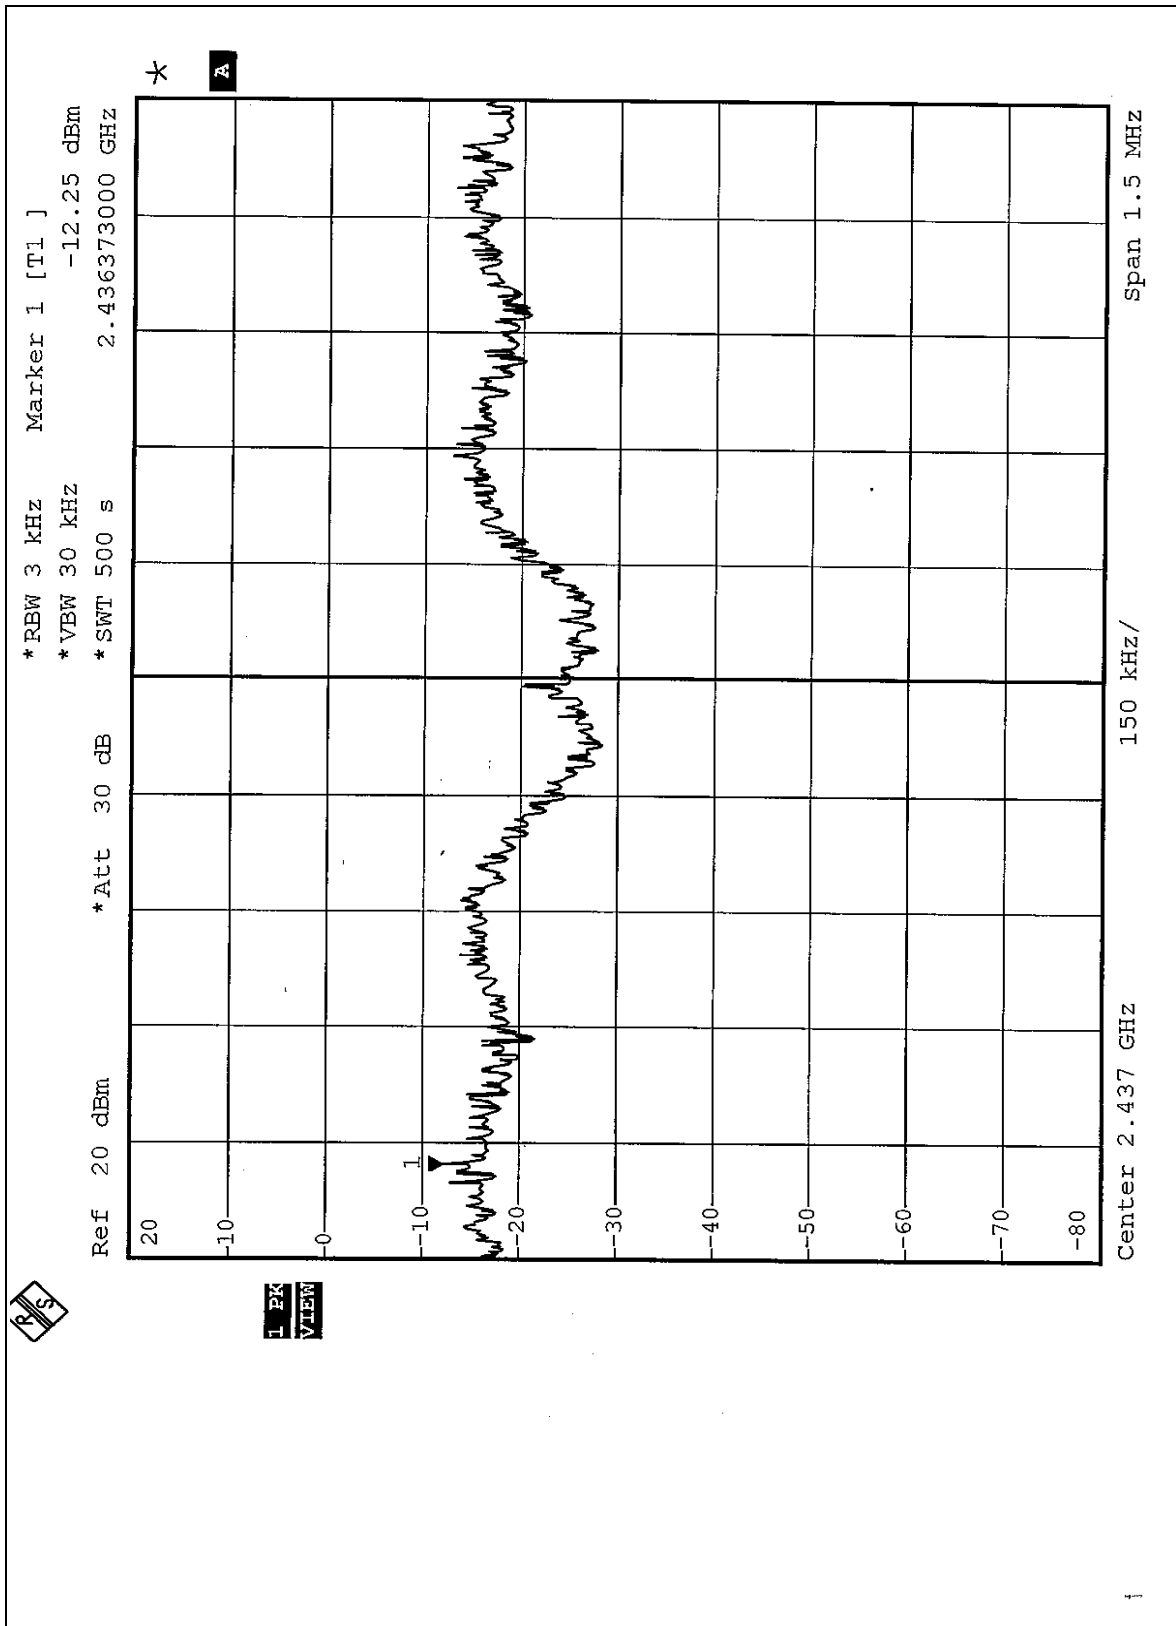

CH11

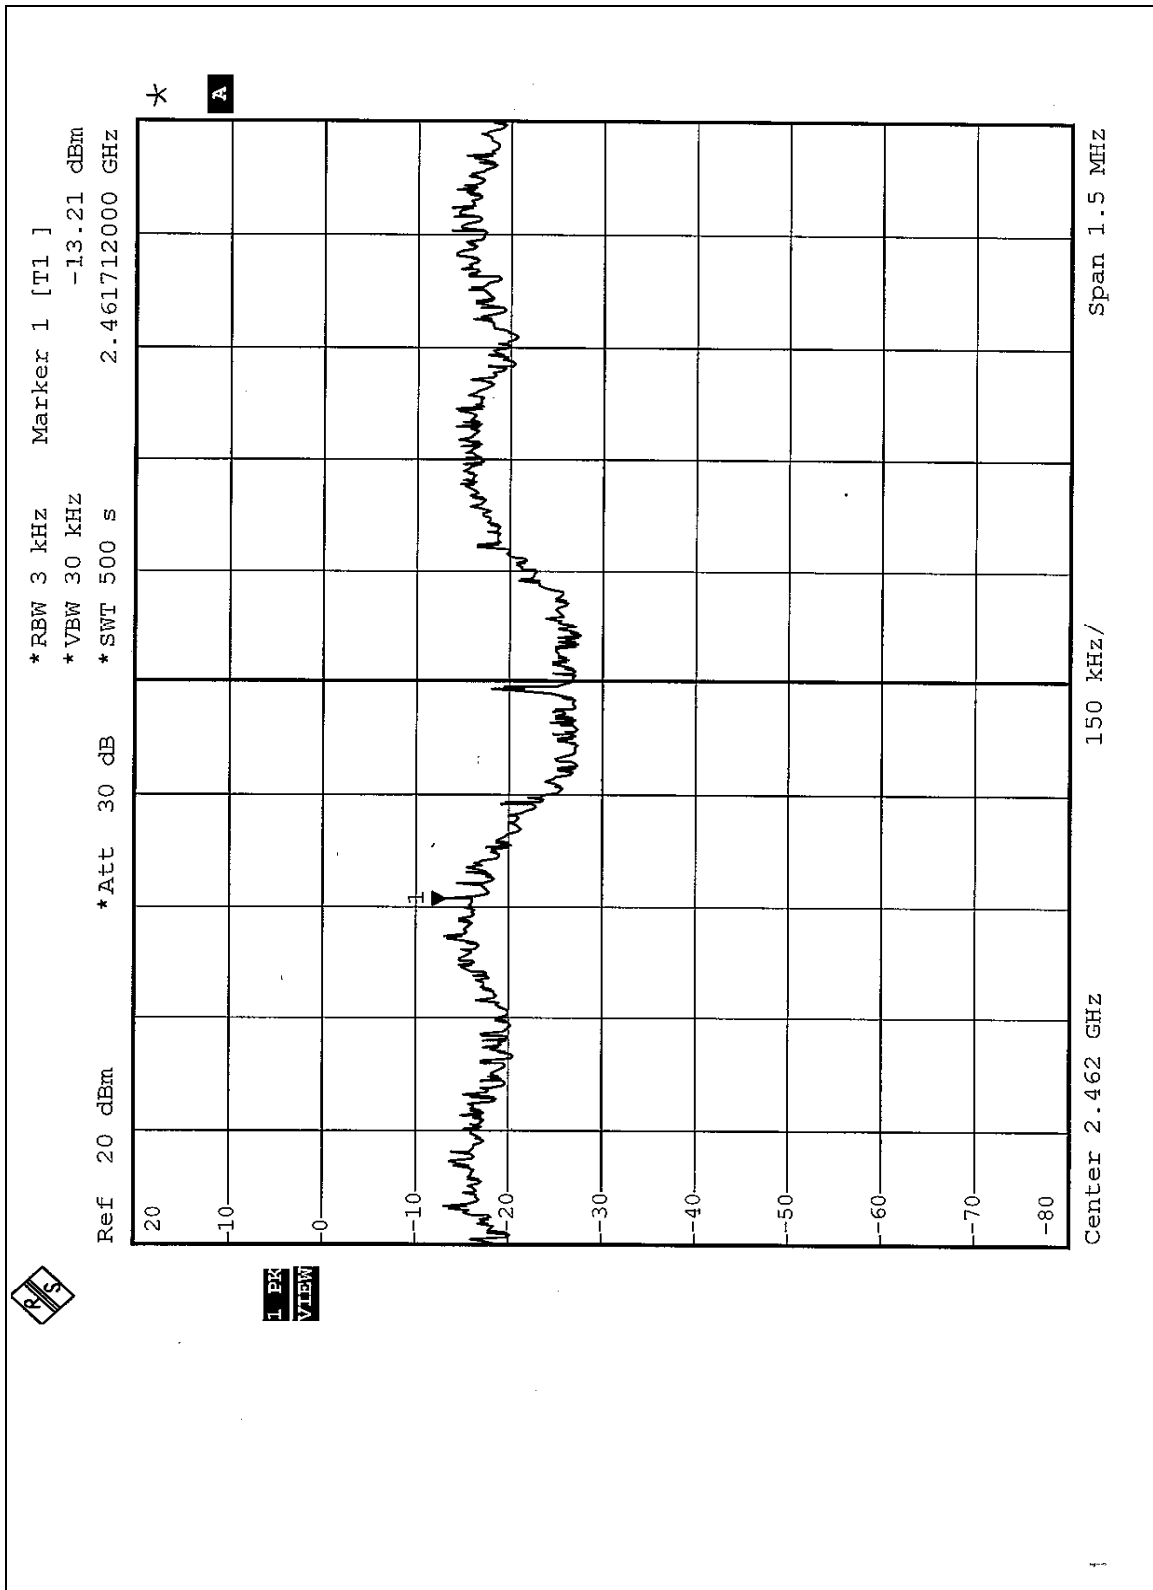

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 1MHz and 10Hz with suitable frequency span including 1MHz and 10Hz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6



4.6.6 TEST RESULTS (A)

The spectrum plots are attached on the following 8 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

NOTE 1:

The band edge emission plot of CCK technique on the following 1~2 pages show 58.28dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 105.45dBuV/m, so the maximum field strength in restrict band is $105.45 - 58.28 = 47.17$ dBuV/m which is under 54dBuV/m limit.

NOTE 2:


The band edge emission plot of CCK technique on the following 3~4 pages show 57.77dB delta between carrier maximum power and local maximum emission in restrict band (2.4846GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 101.07dBuV/m, so the maximum field strength in restrict band is $101.07 - 57.77 = 43.30$ dBuV/m which is under 54dBuV/m limit.


NOTE 3:


The band edge emission plot of OFDM technique on the following 5~6 pages show 50.61dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 102.53dBuV/m, so the maximum field strength in restrict band is $102.53 - 50.61 = 51.92$ dBuV/m which is under 54dBuV/m limit.


NOTE 4:


The band edge emission plot of OFDM technique on the following 7~8 pages show 49.66dB delta between carrier maximum power and local maximum emission in restrict band (2.4836GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 101.53dBuV/m, so the maximum field strength in restrict band is $101.53 - 49.66 = 51.87$ dBuV/m which is under 54dBuV/m limit.

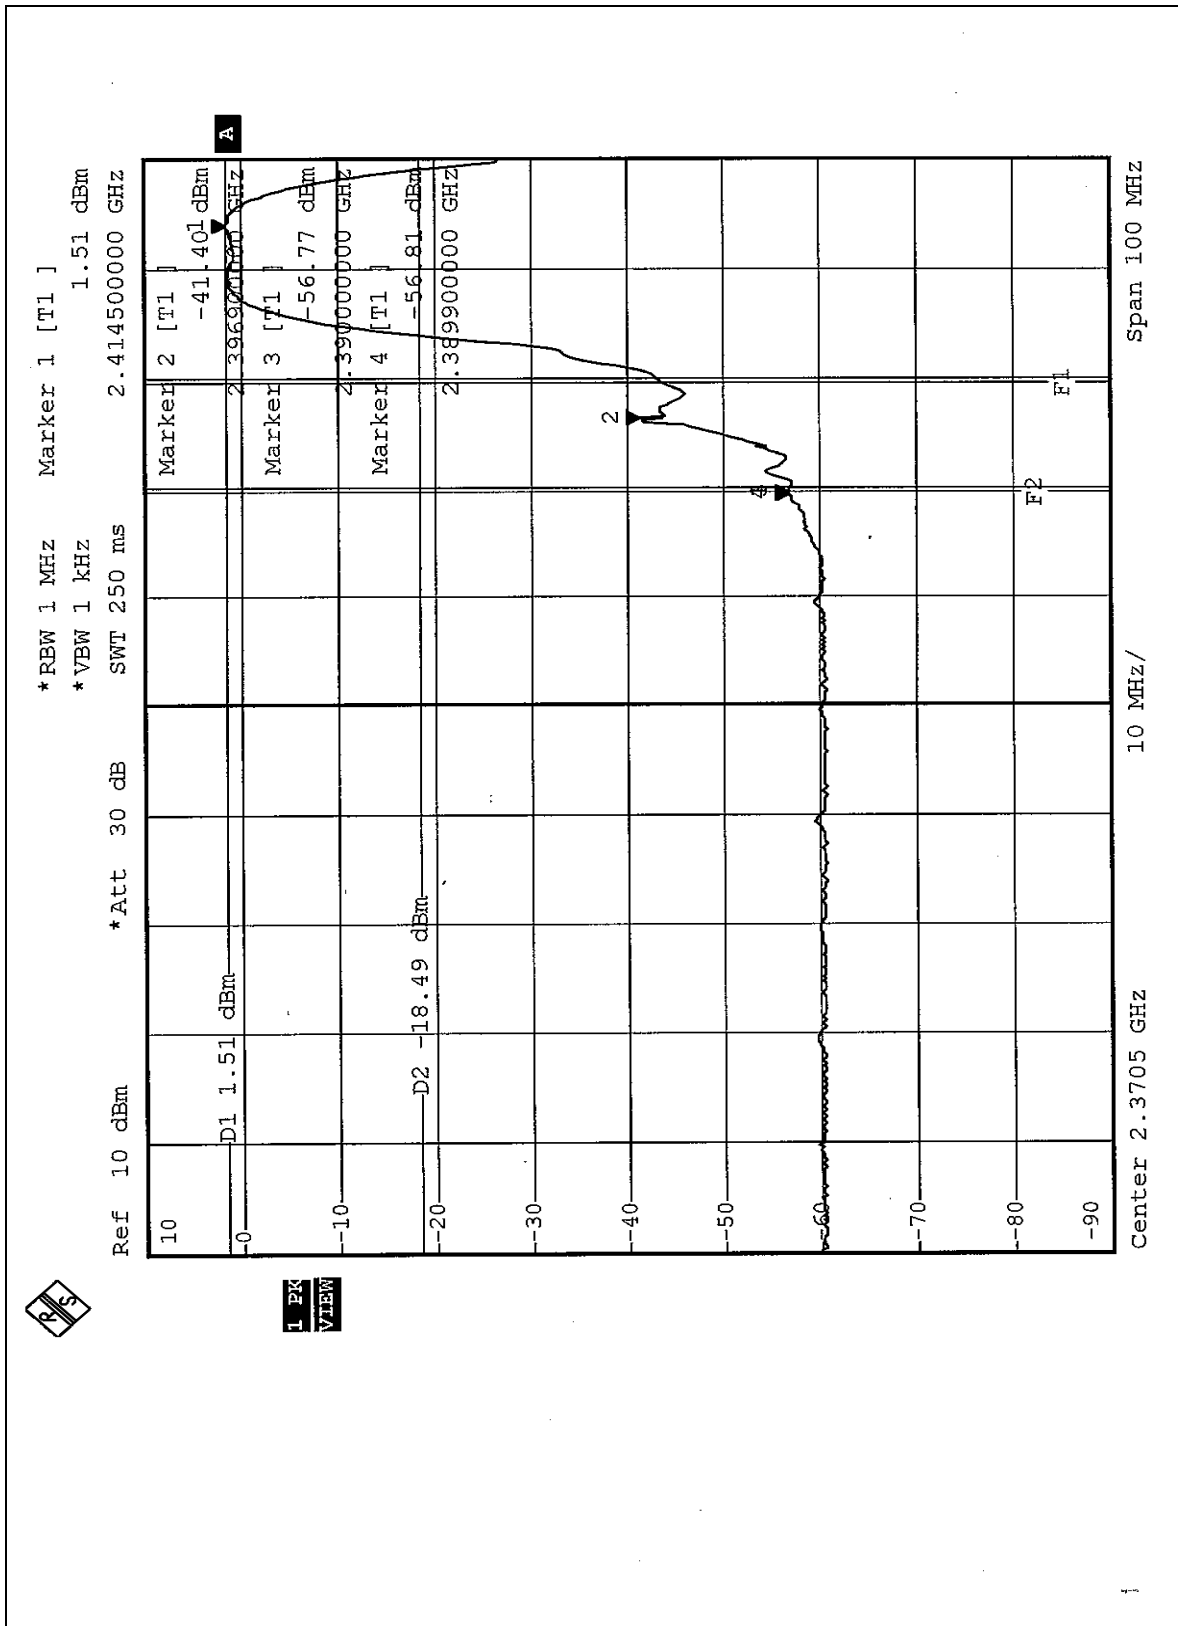


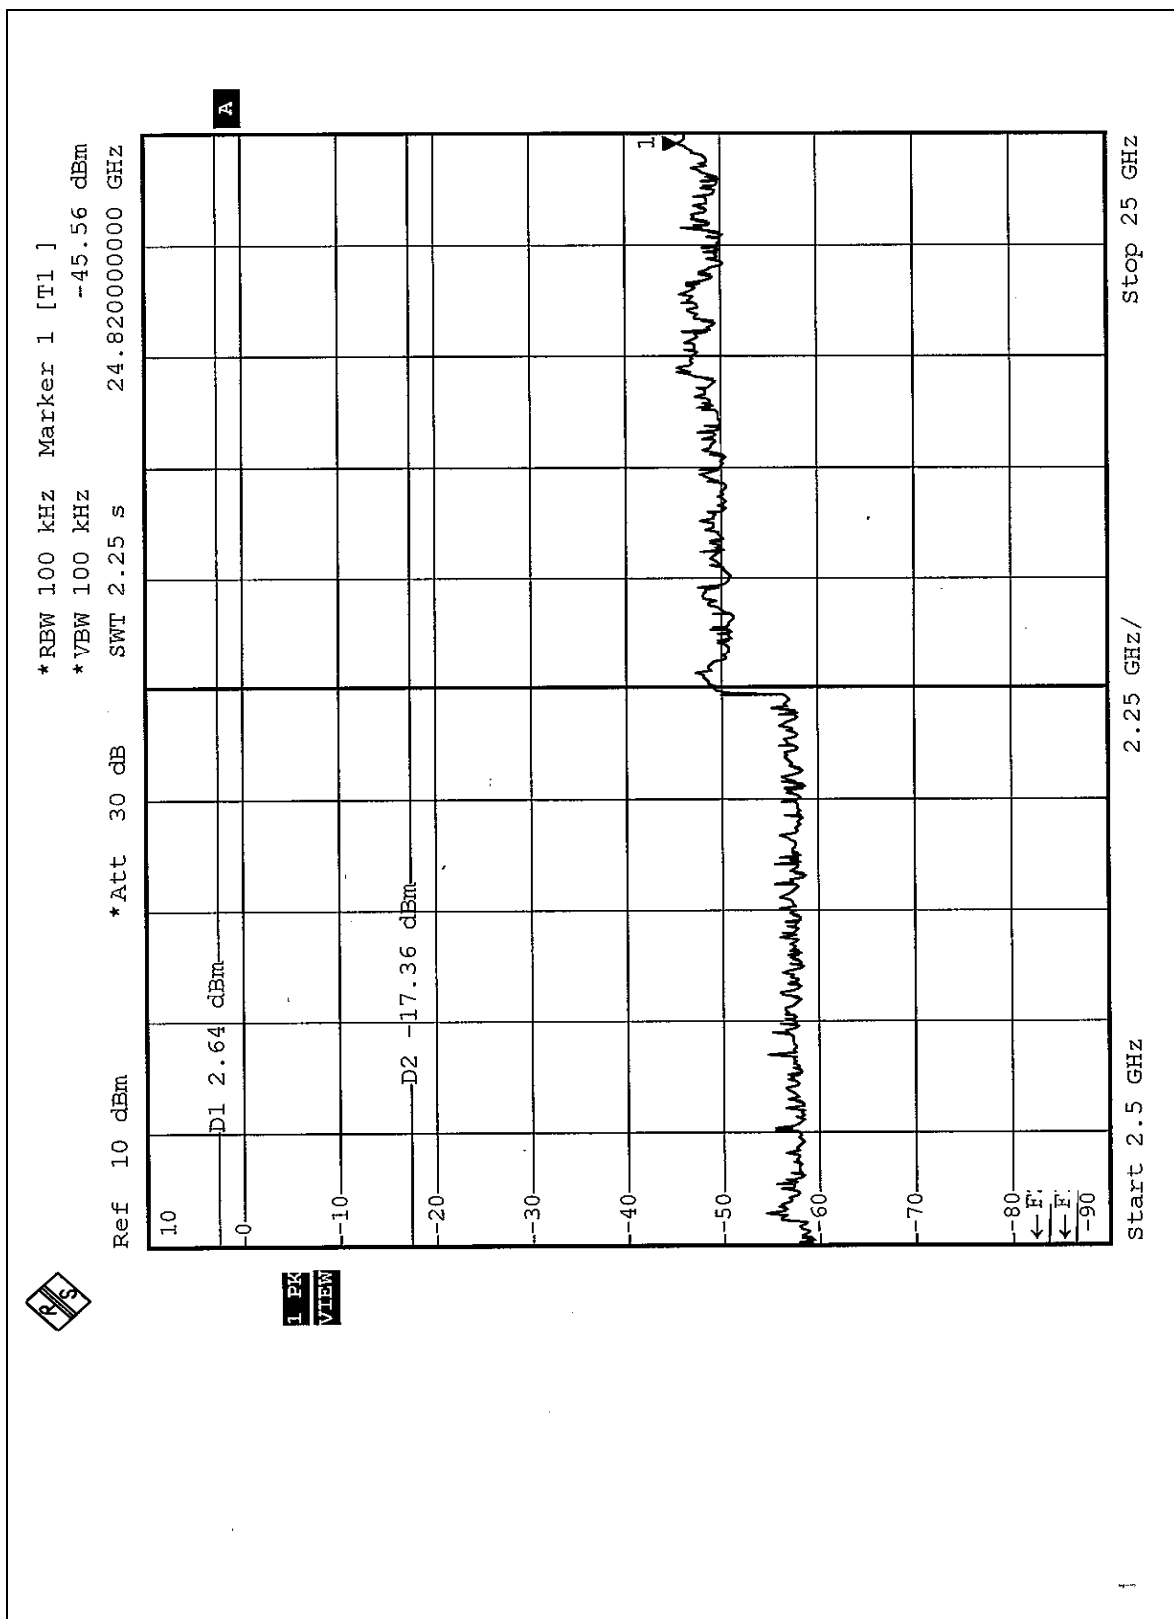


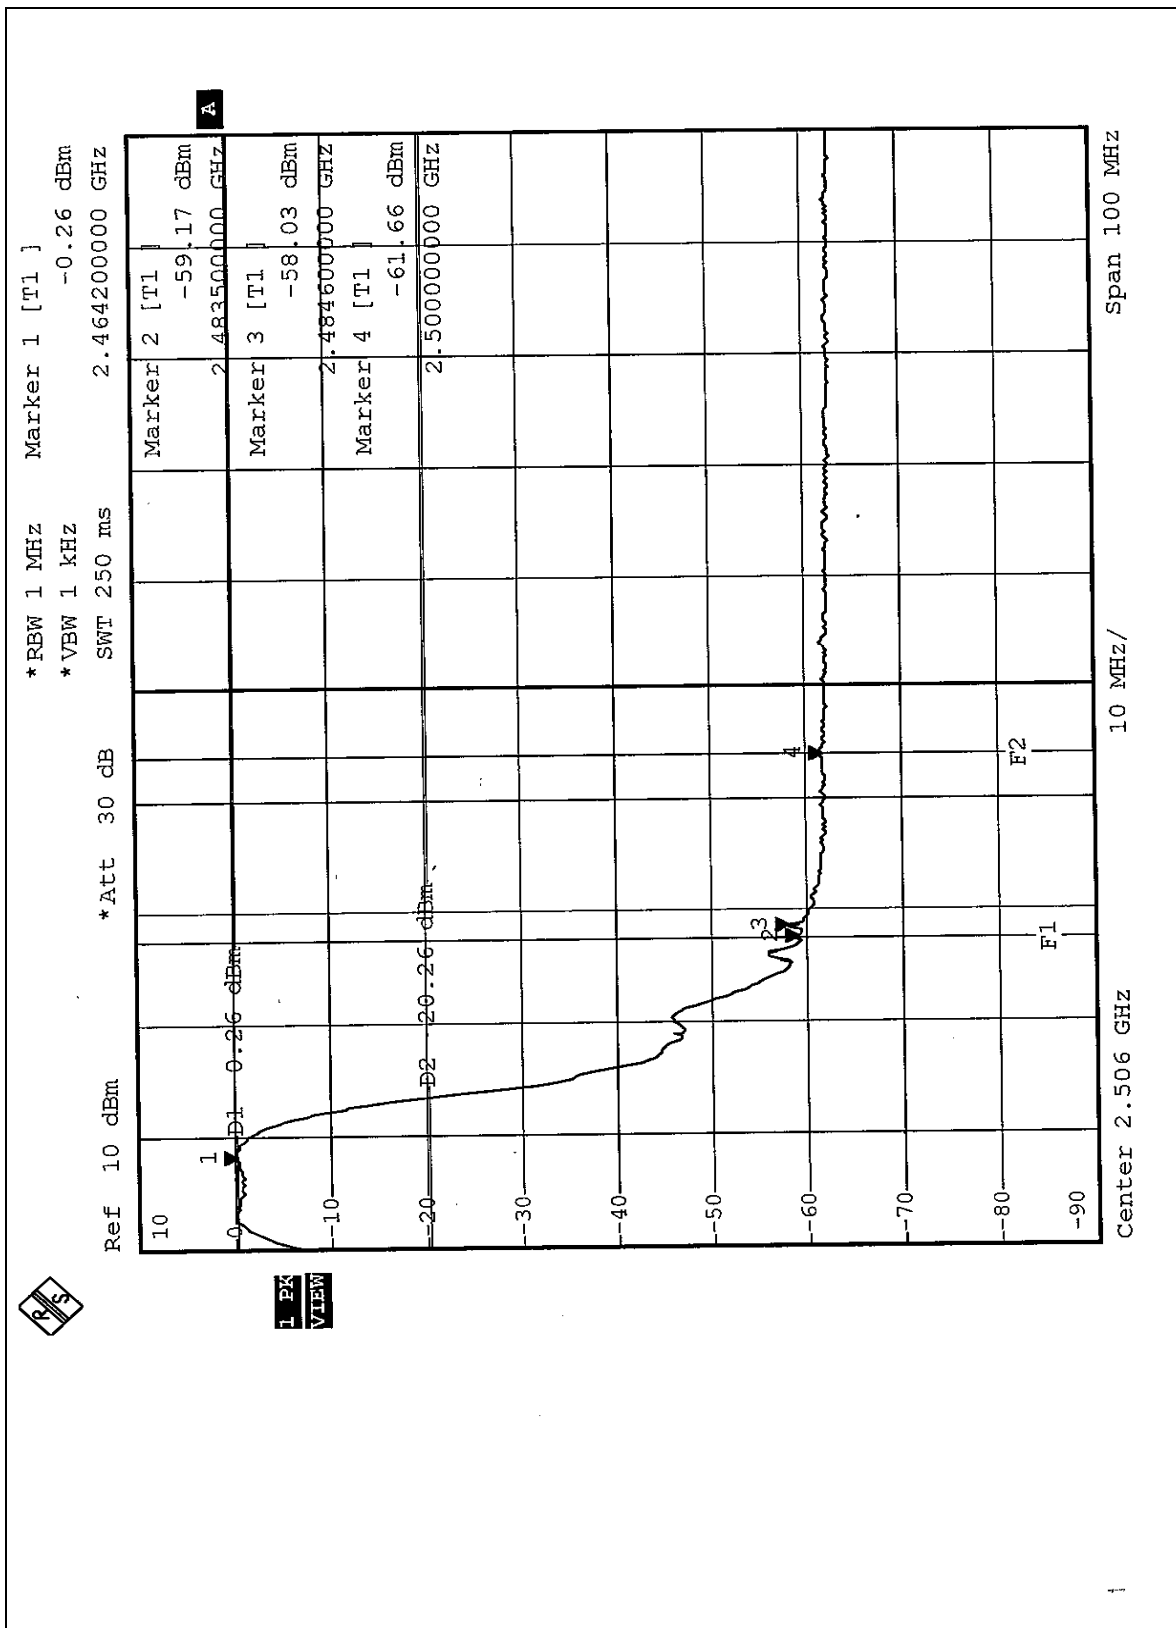


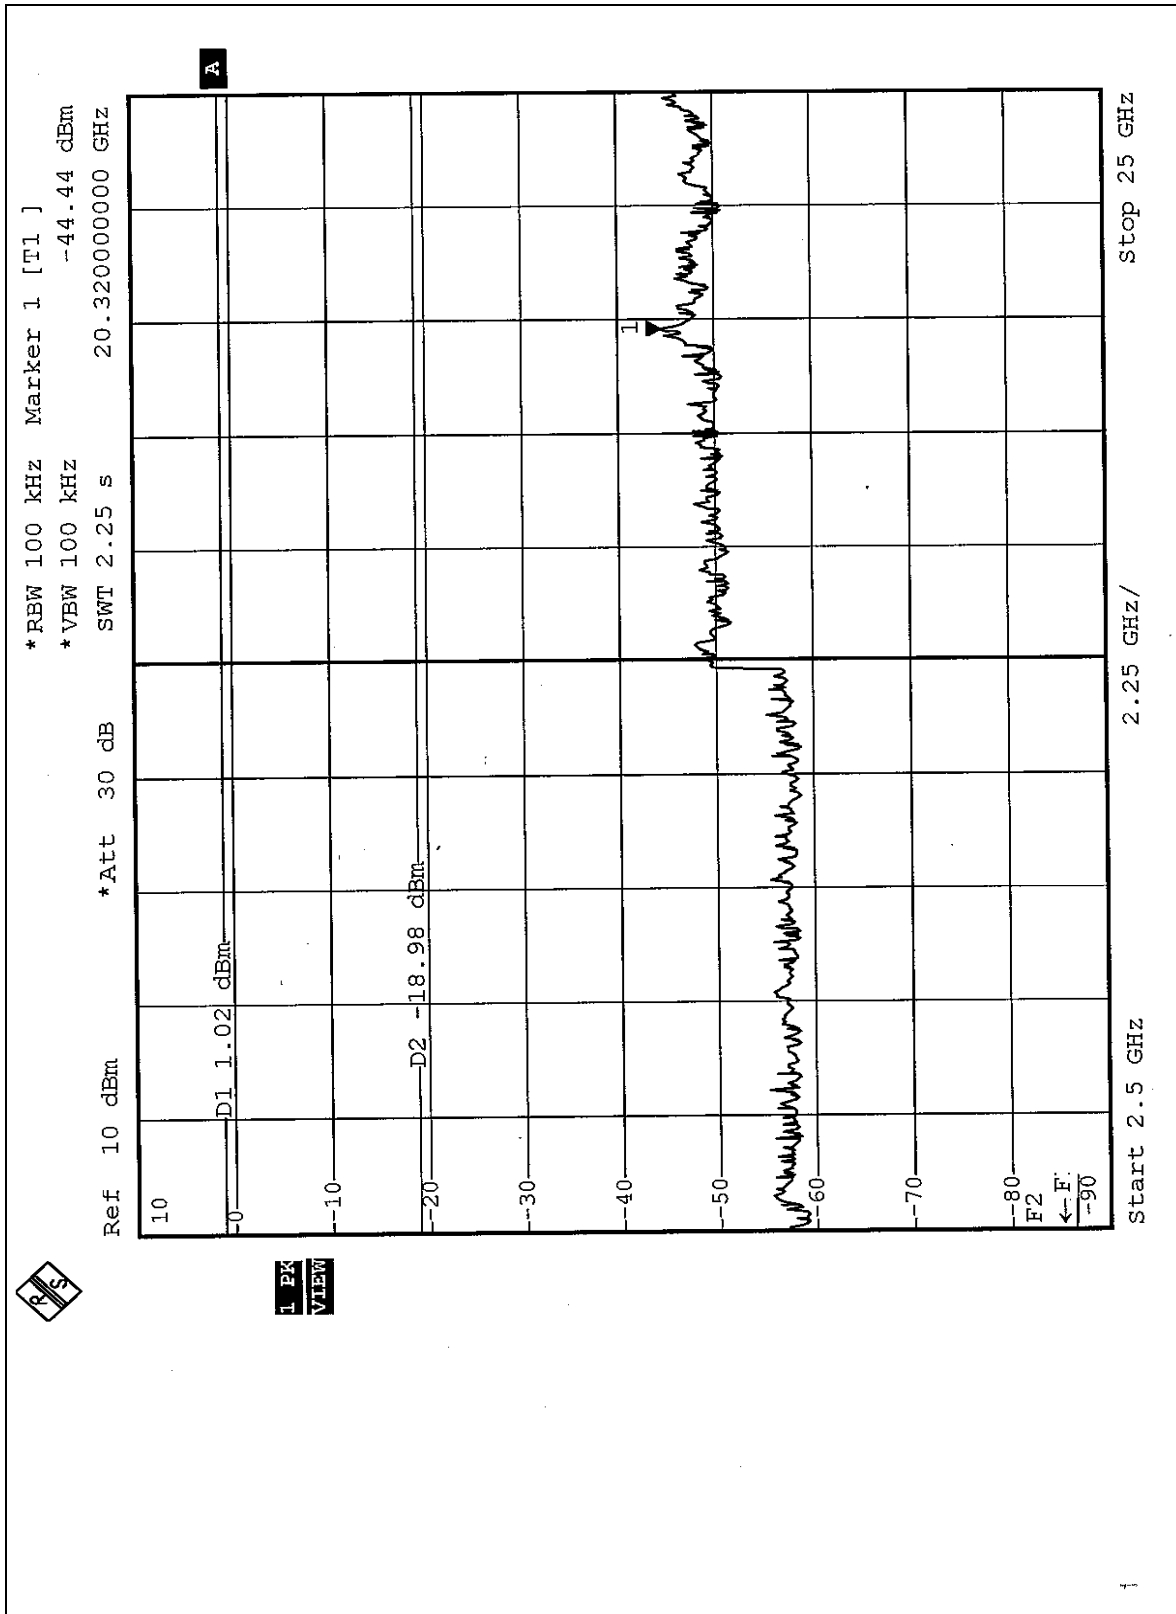

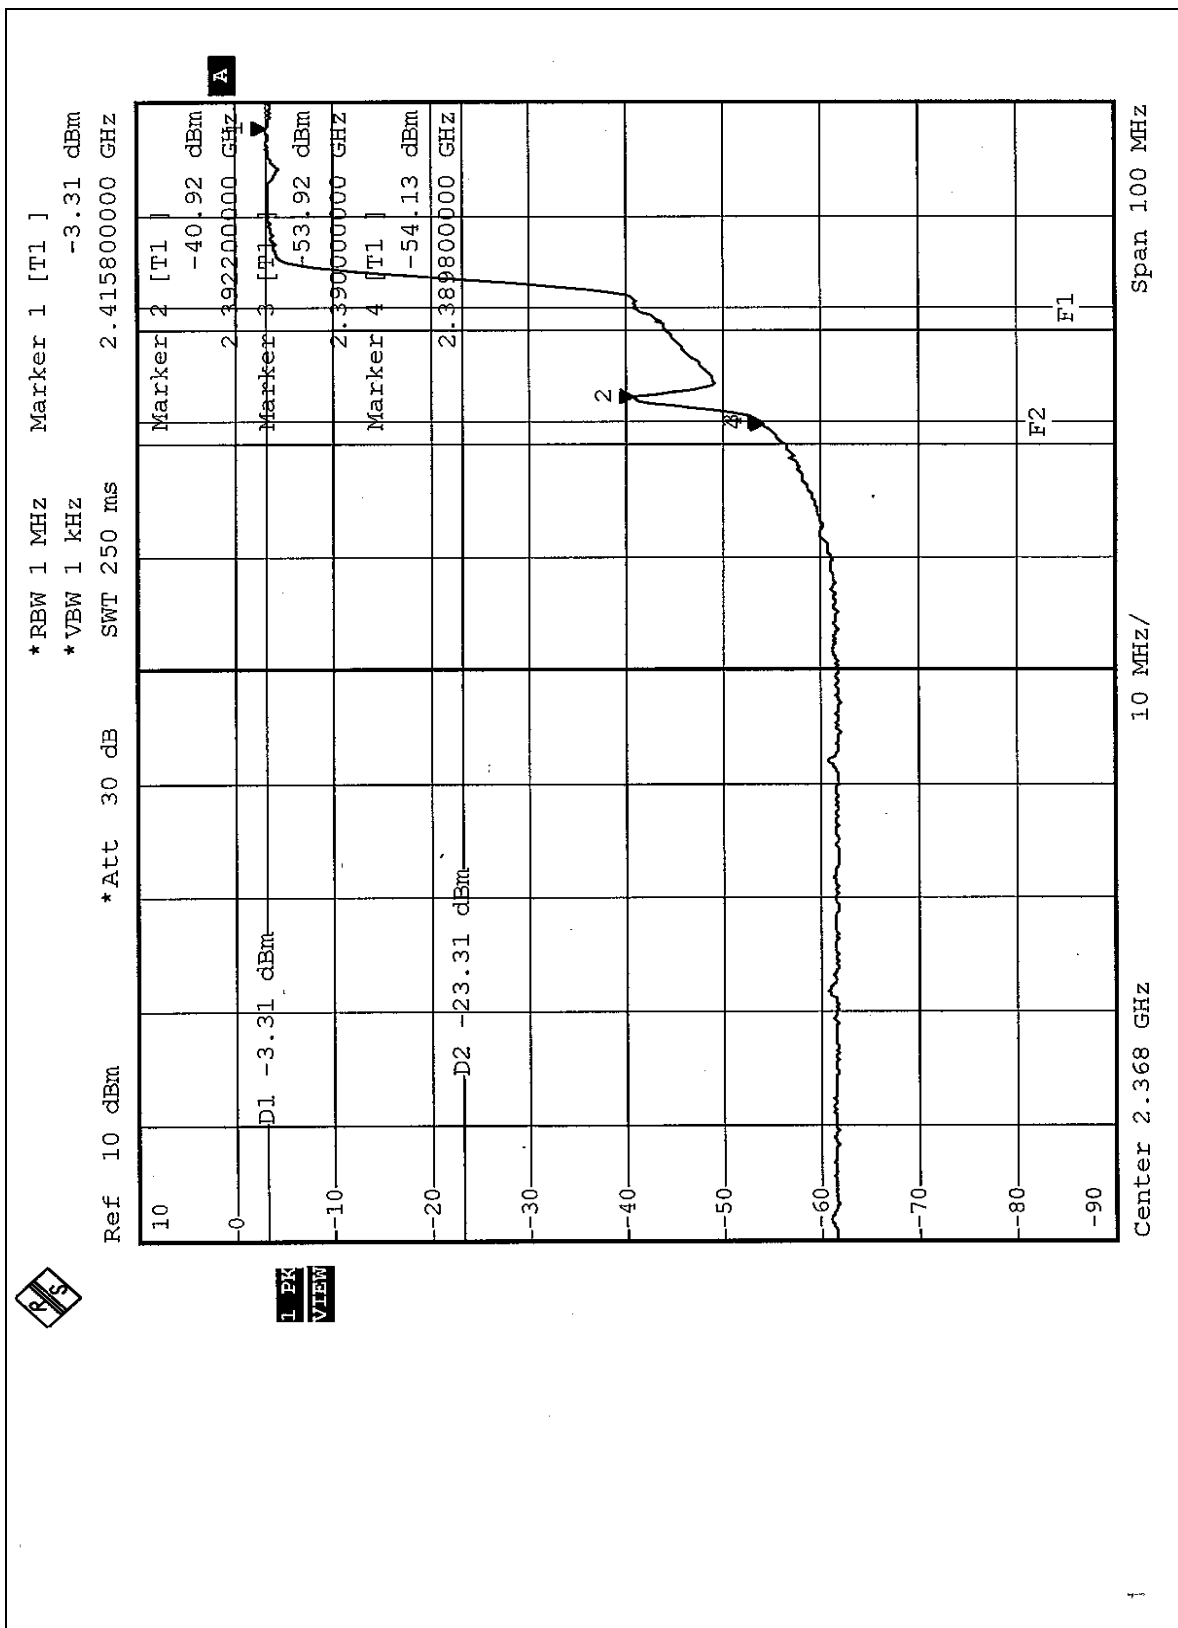

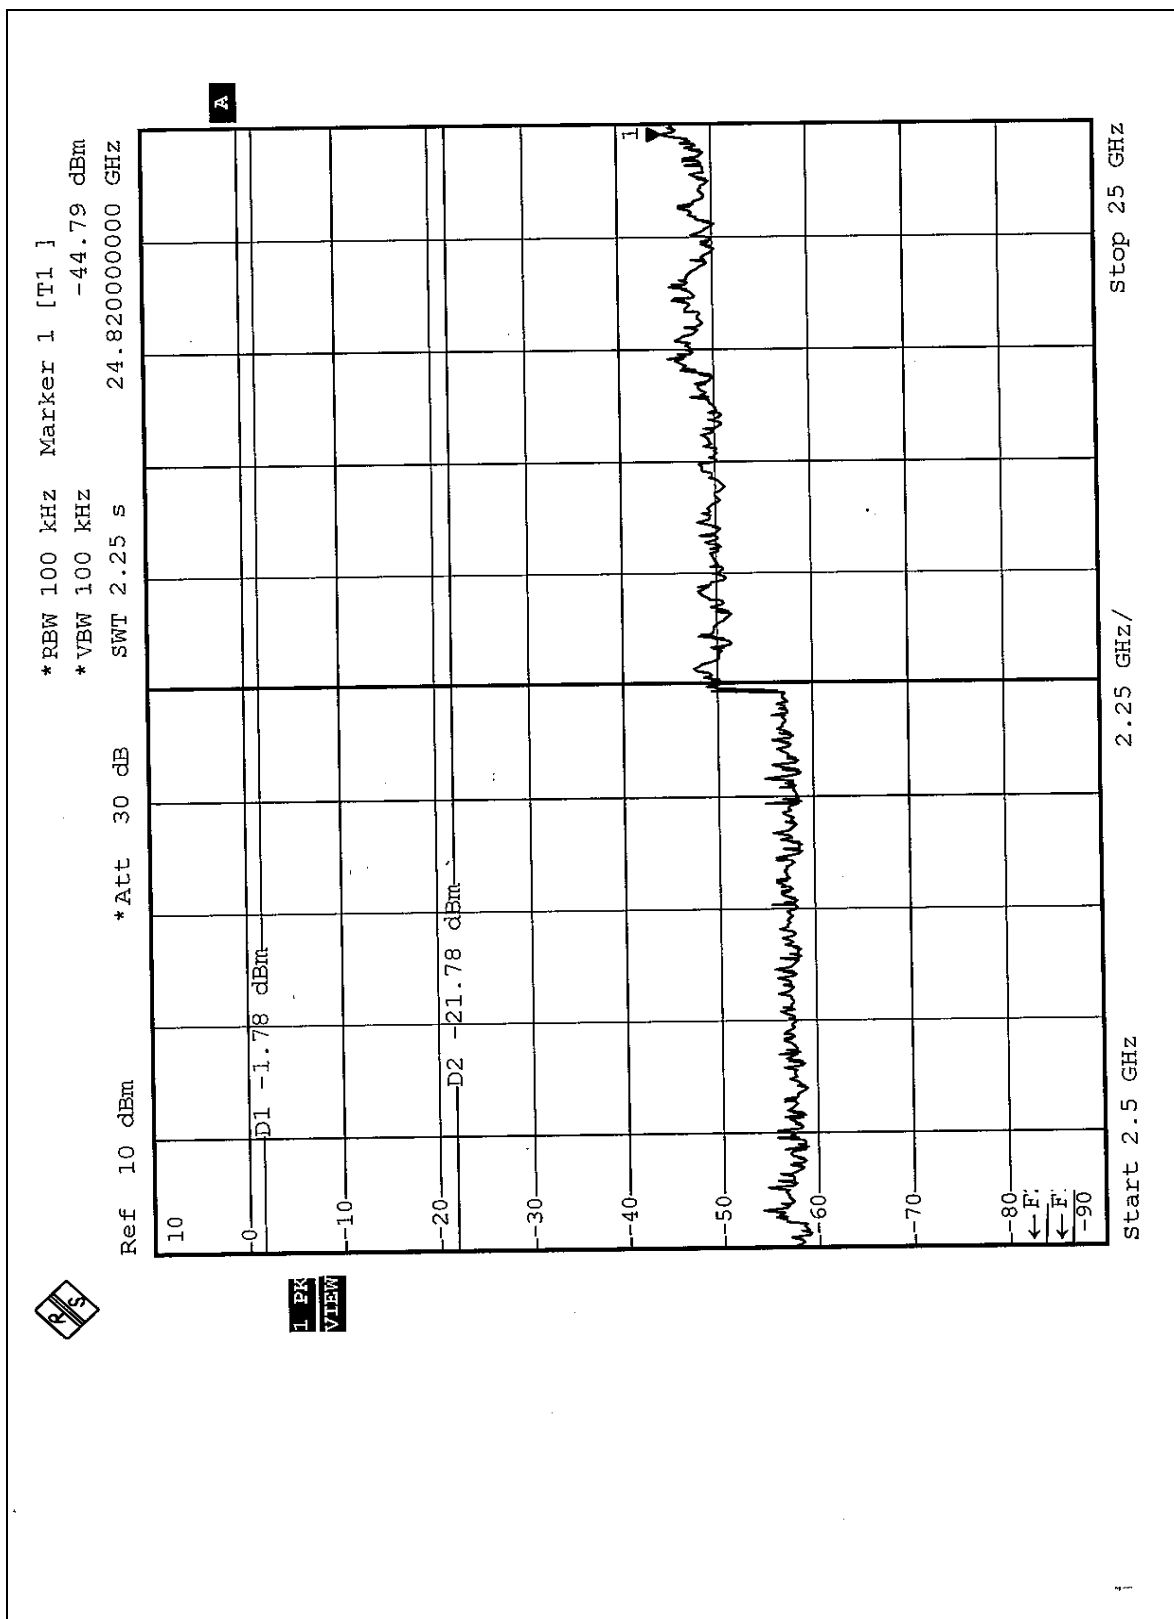

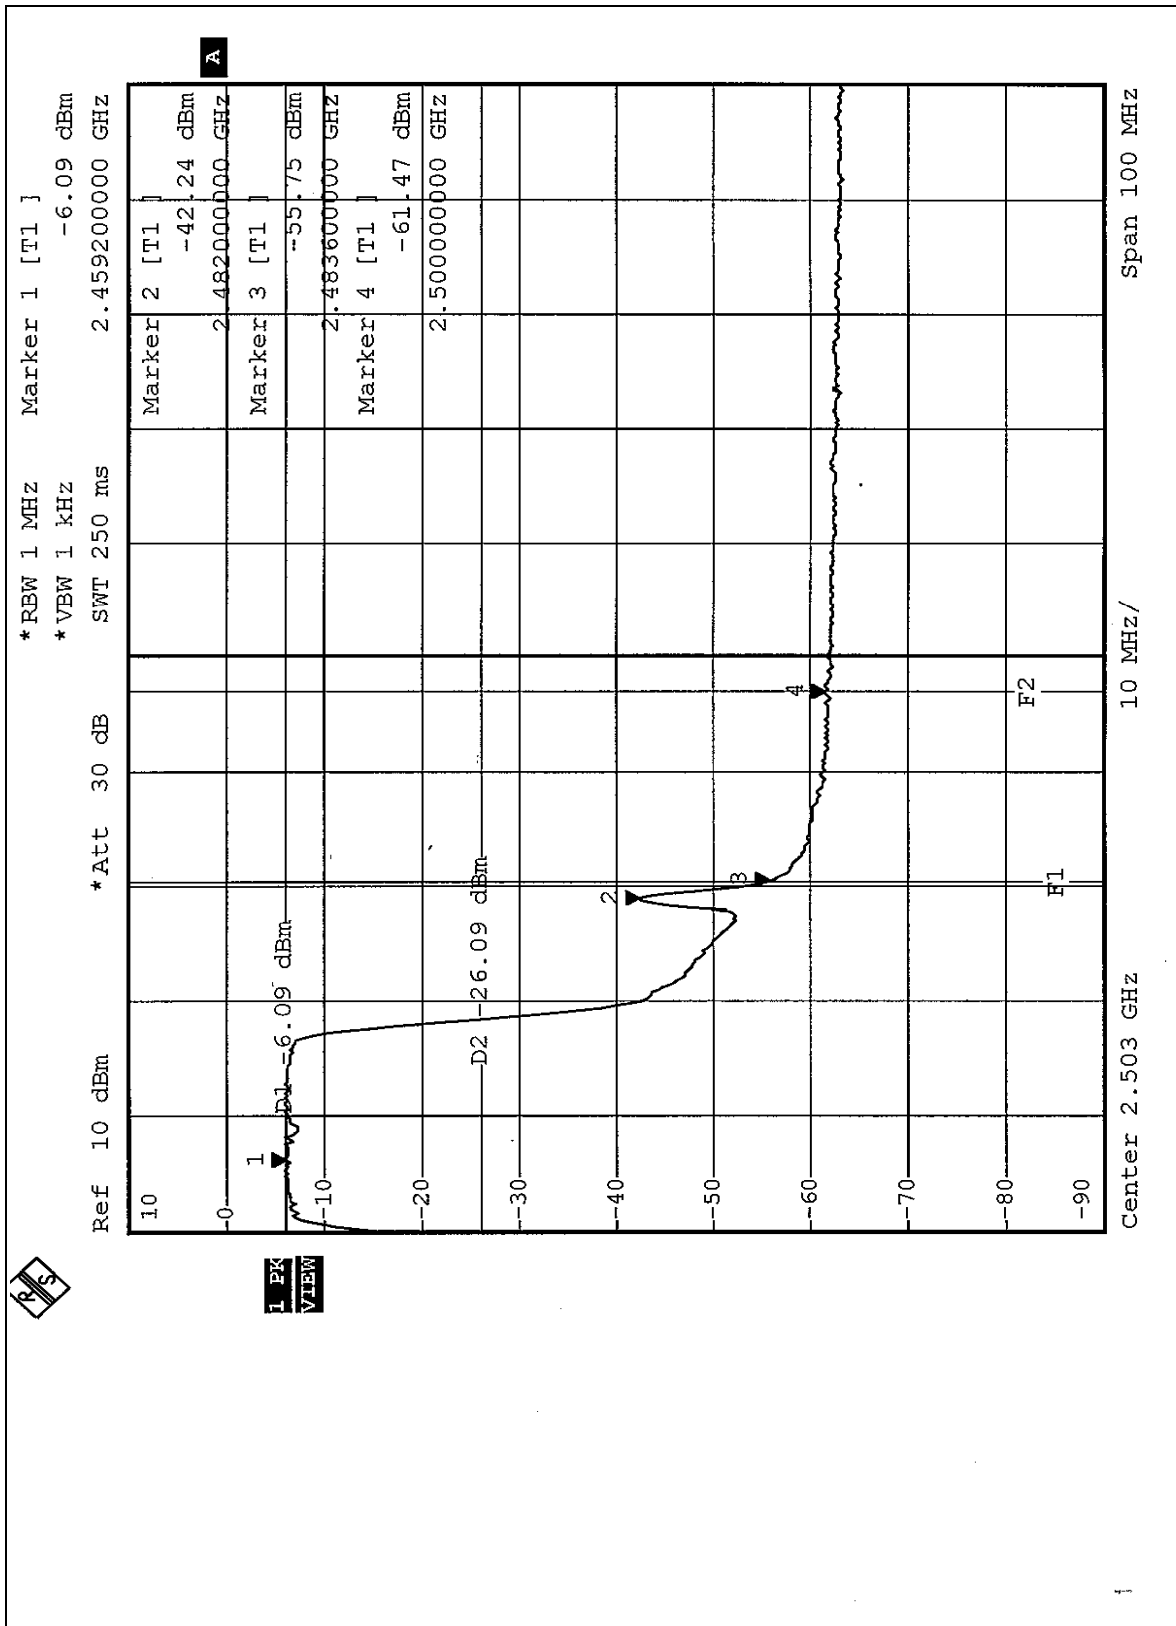

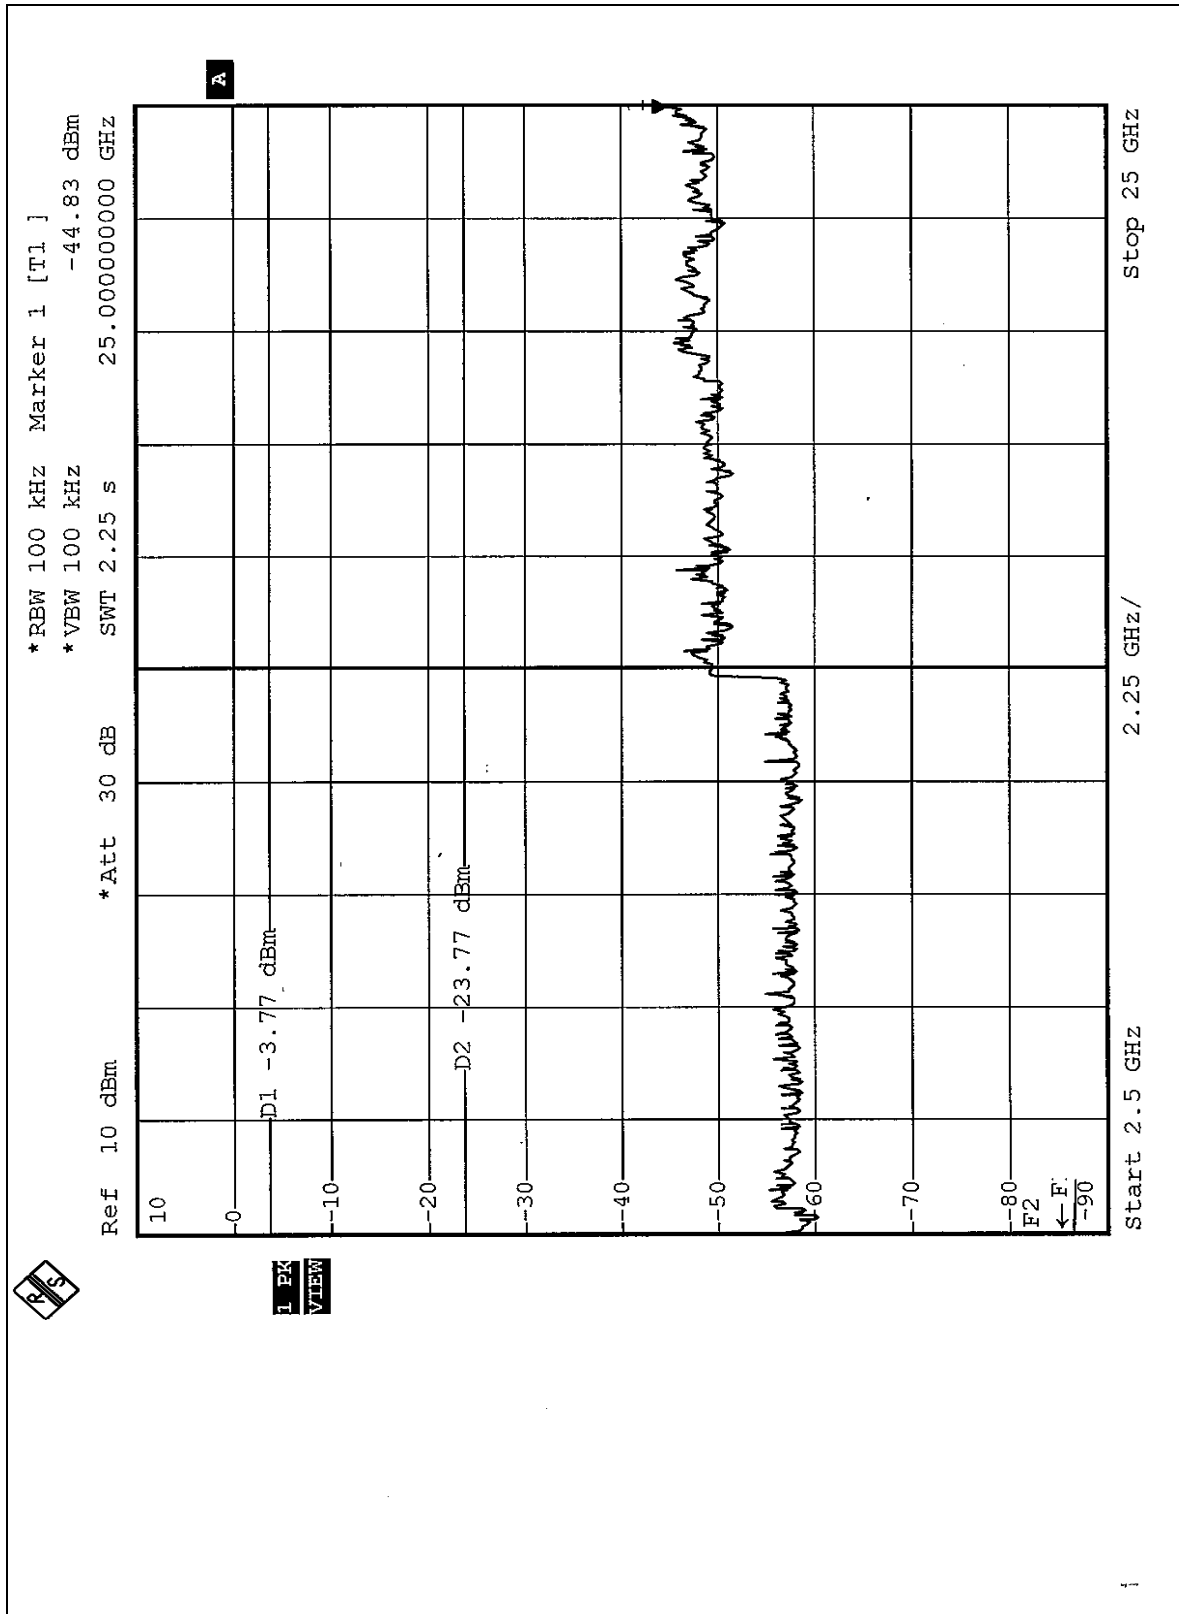

4.6.7 TEST RESULTS (B)

The spectrum plots are attached on the following 8 pages. D2 line indicates the highest level and D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

NOTE 1:

The band edge emission plot of CCK technique on the following 1~2 pages show 54.96dB delta between carrier maximum power and local maximum emission in restrict band (2.3863GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 103.16dBuV/m, so the maximum field strength in restrict band is $103.16 - 54.96 = 48.20$ dBuV/m which is under 54dBuV/m limit.

NOTE 2:


The band edge emission plot of CCK technique on the following 3~4 pages show 53.78dB delta between carrier maximum power and local maximum emission in restrict band (2.4836GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 100.59dBuV/m, so the maximum field strength in restrict band is $100.59 - 53.78 = 46.81$ dBuV/m which is under 54dBuV/m limit.


NOTE 3:


The band edge emission plot of OFDM technique on the following 5~6 pages show 48.18dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 98.13dBuV/m, so the maximum field strength in restrict band is $98.13 - 48.18 = 49.95$ dBuV/m which is under 54dBuV/m limit.


NOTE 4:


The band edge emission plot of OFDM technique on the following 7~8 pages show 47.47dB delta between carrier maximum power and local maximum emission in restrict band (2.4836GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 98.19dBuV/m, so the maximum field strength in restrict band is $98.19 - 47.47 = 50.72$ dBuV/m which is under 54dBuV/m limit.

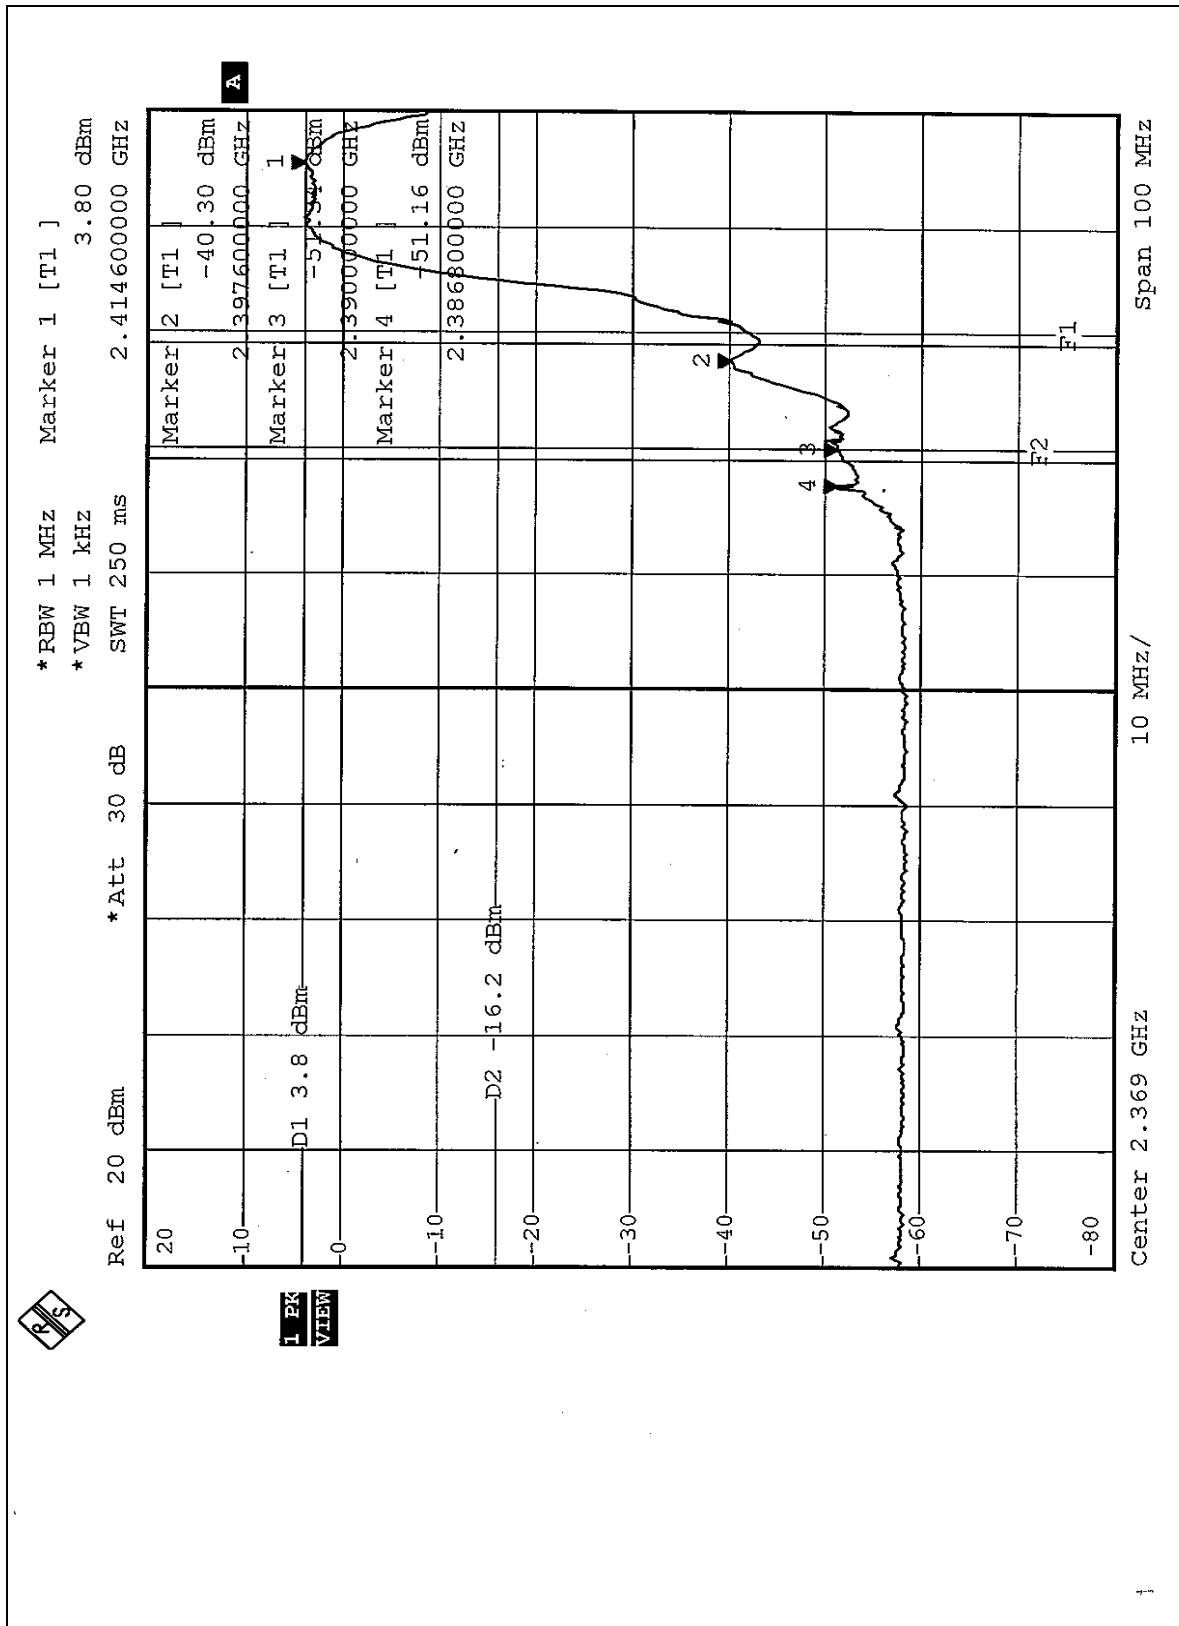


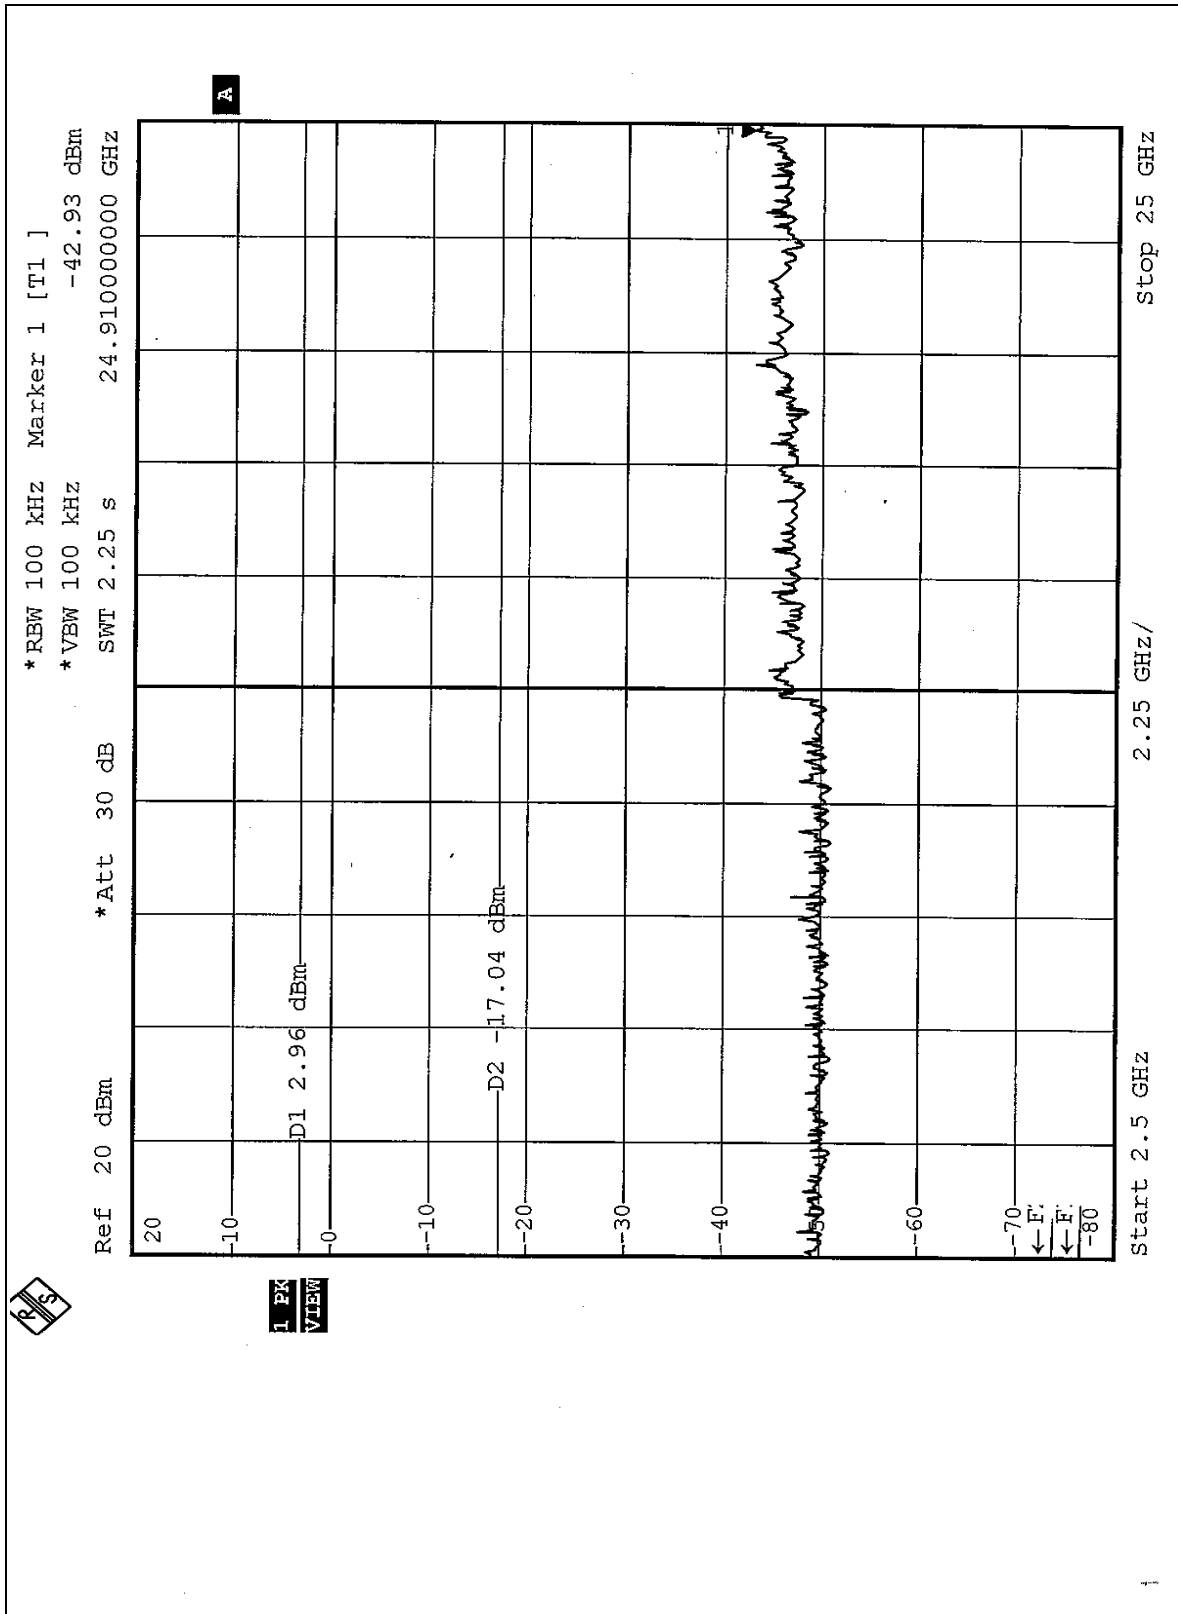


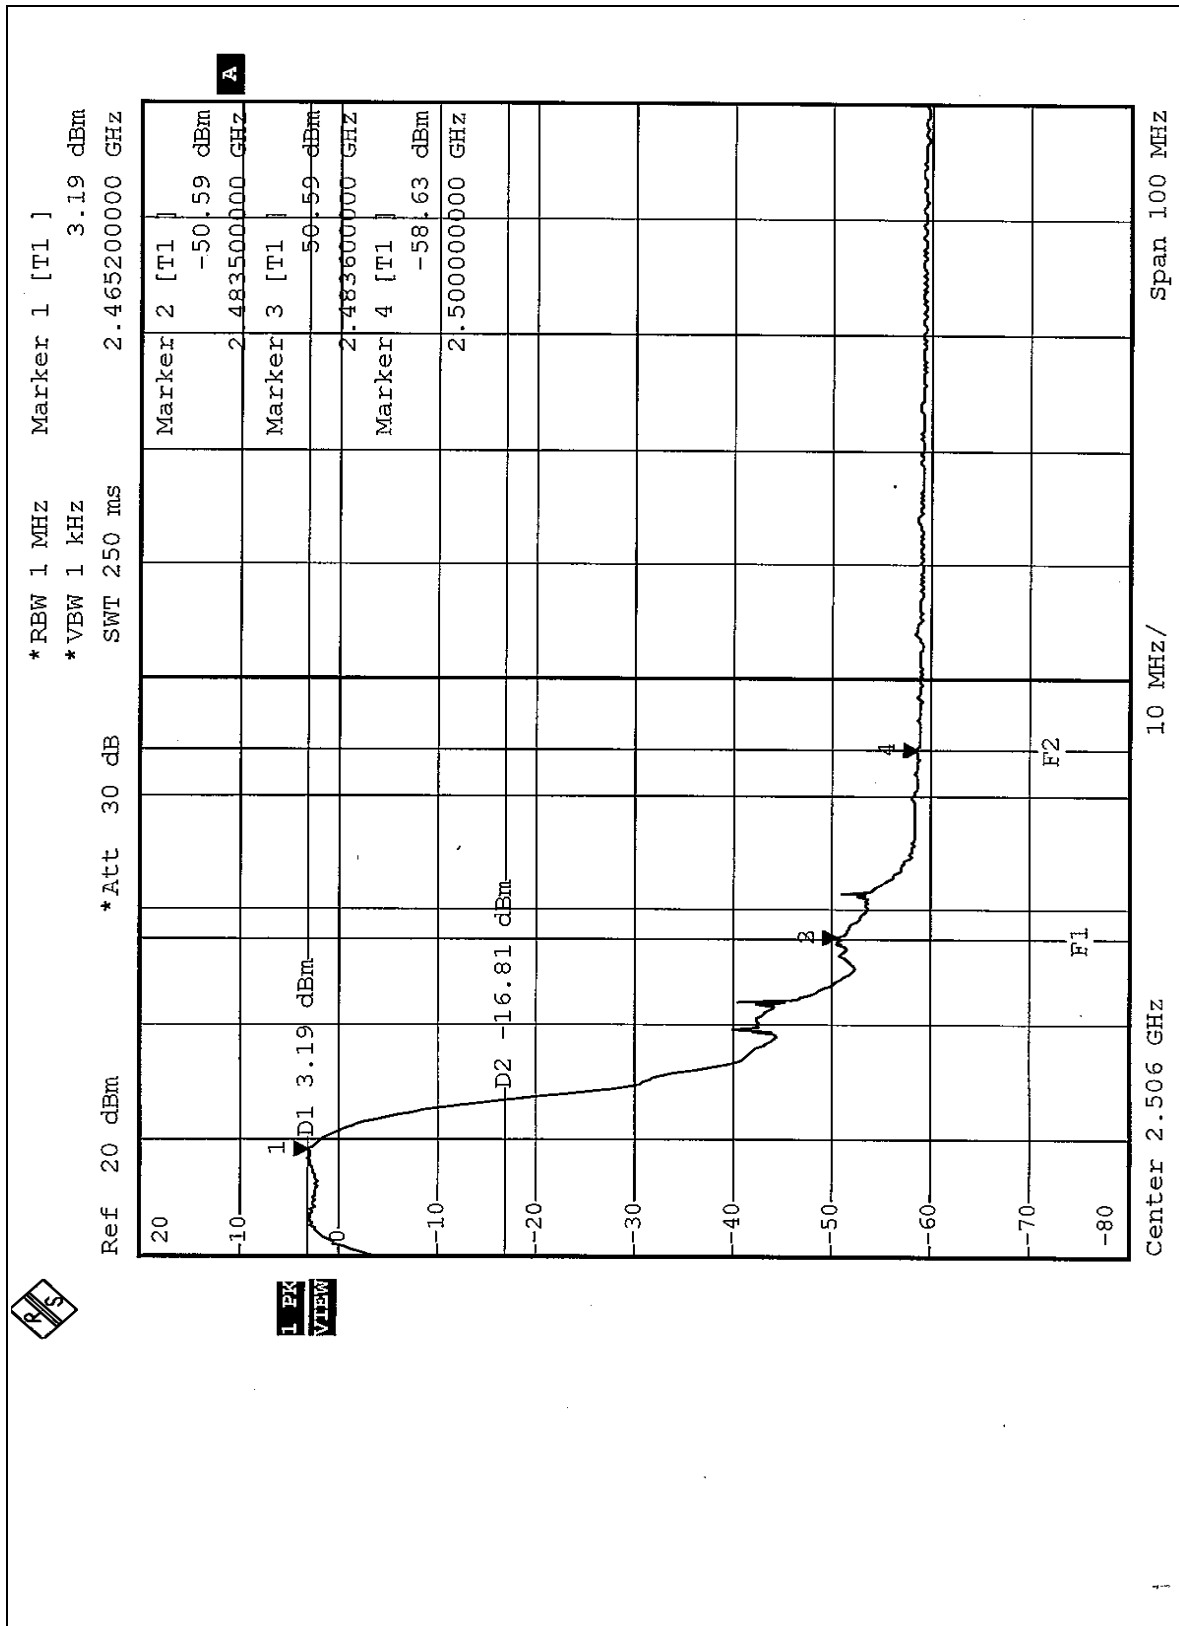


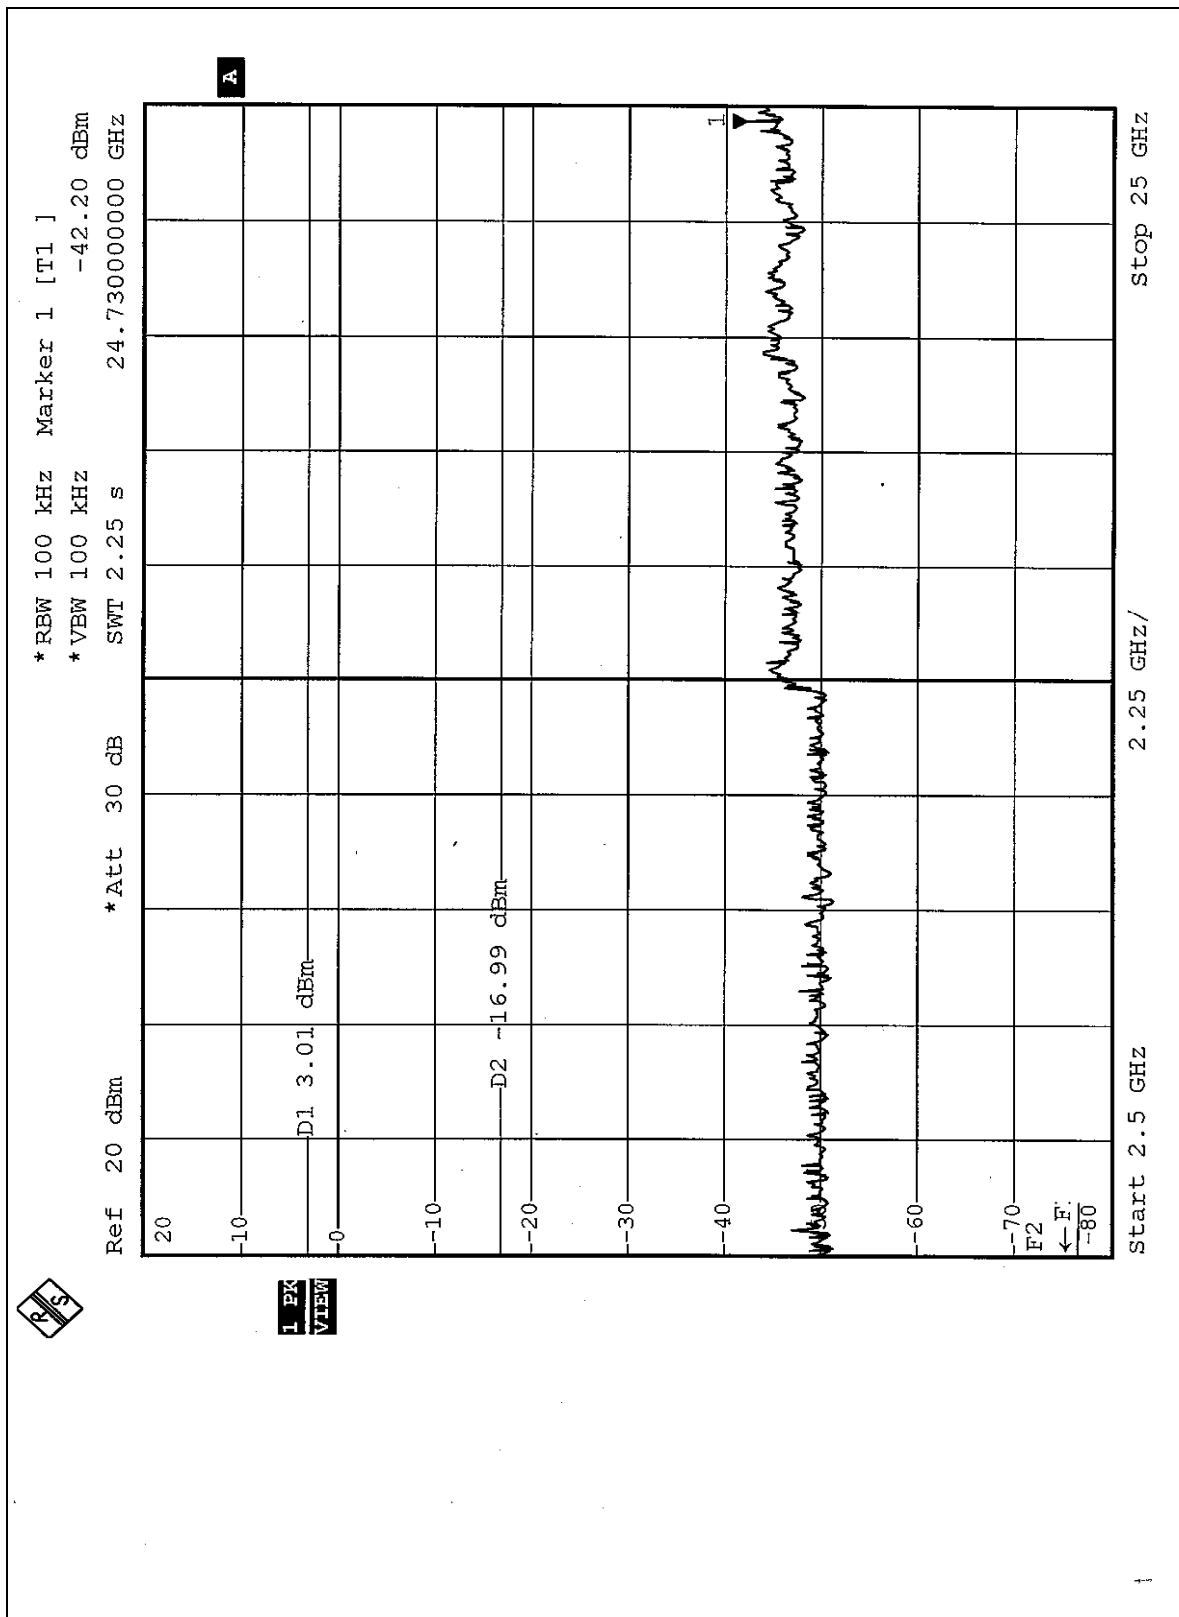

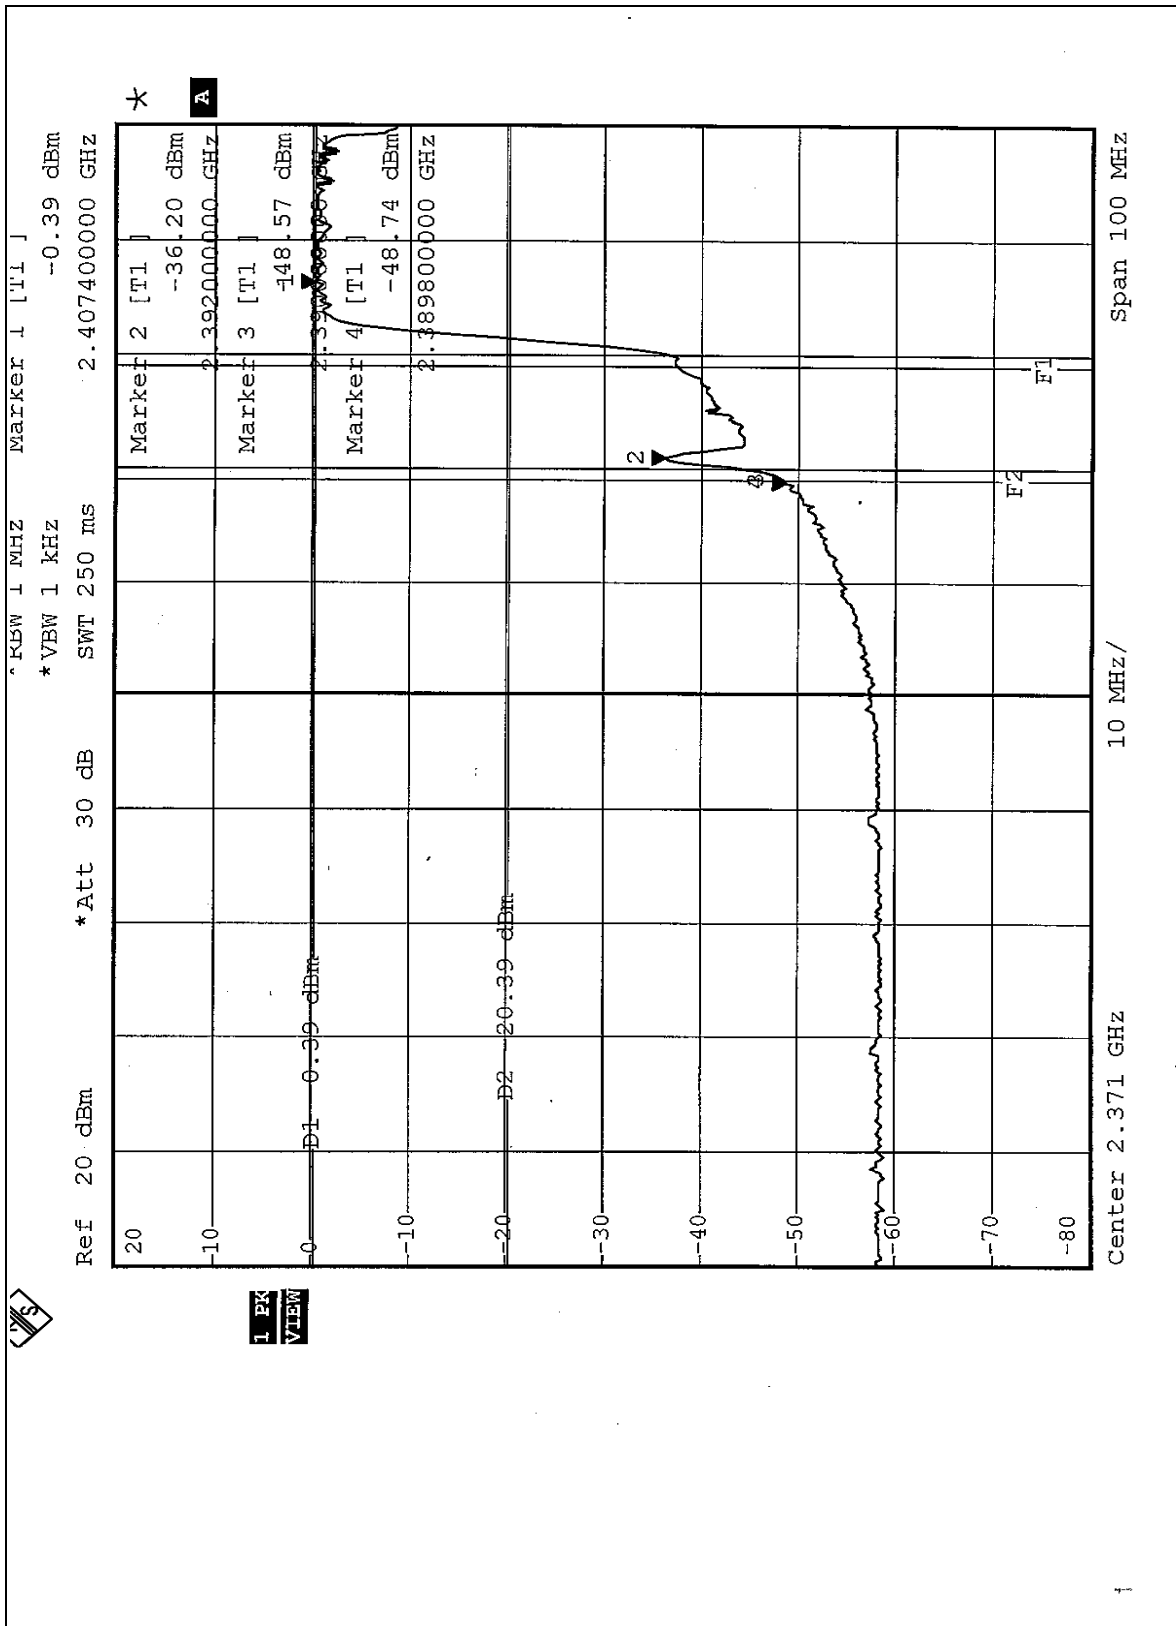

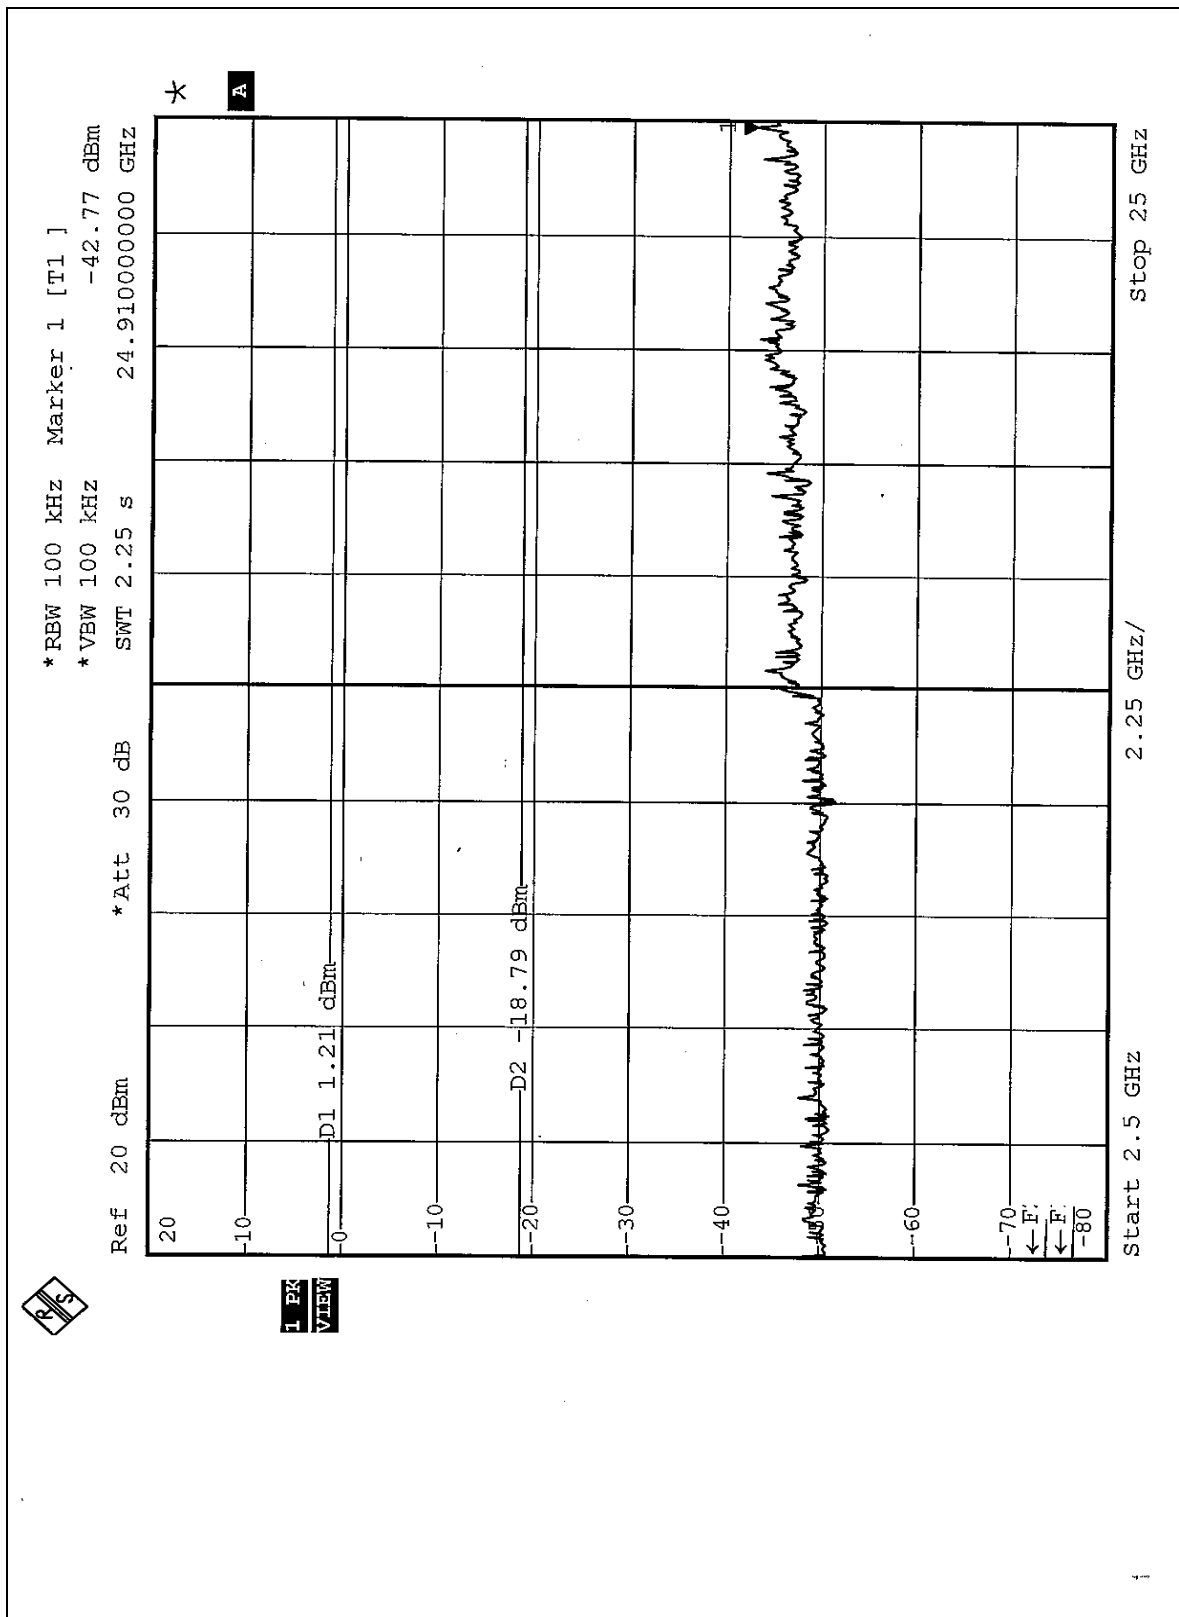

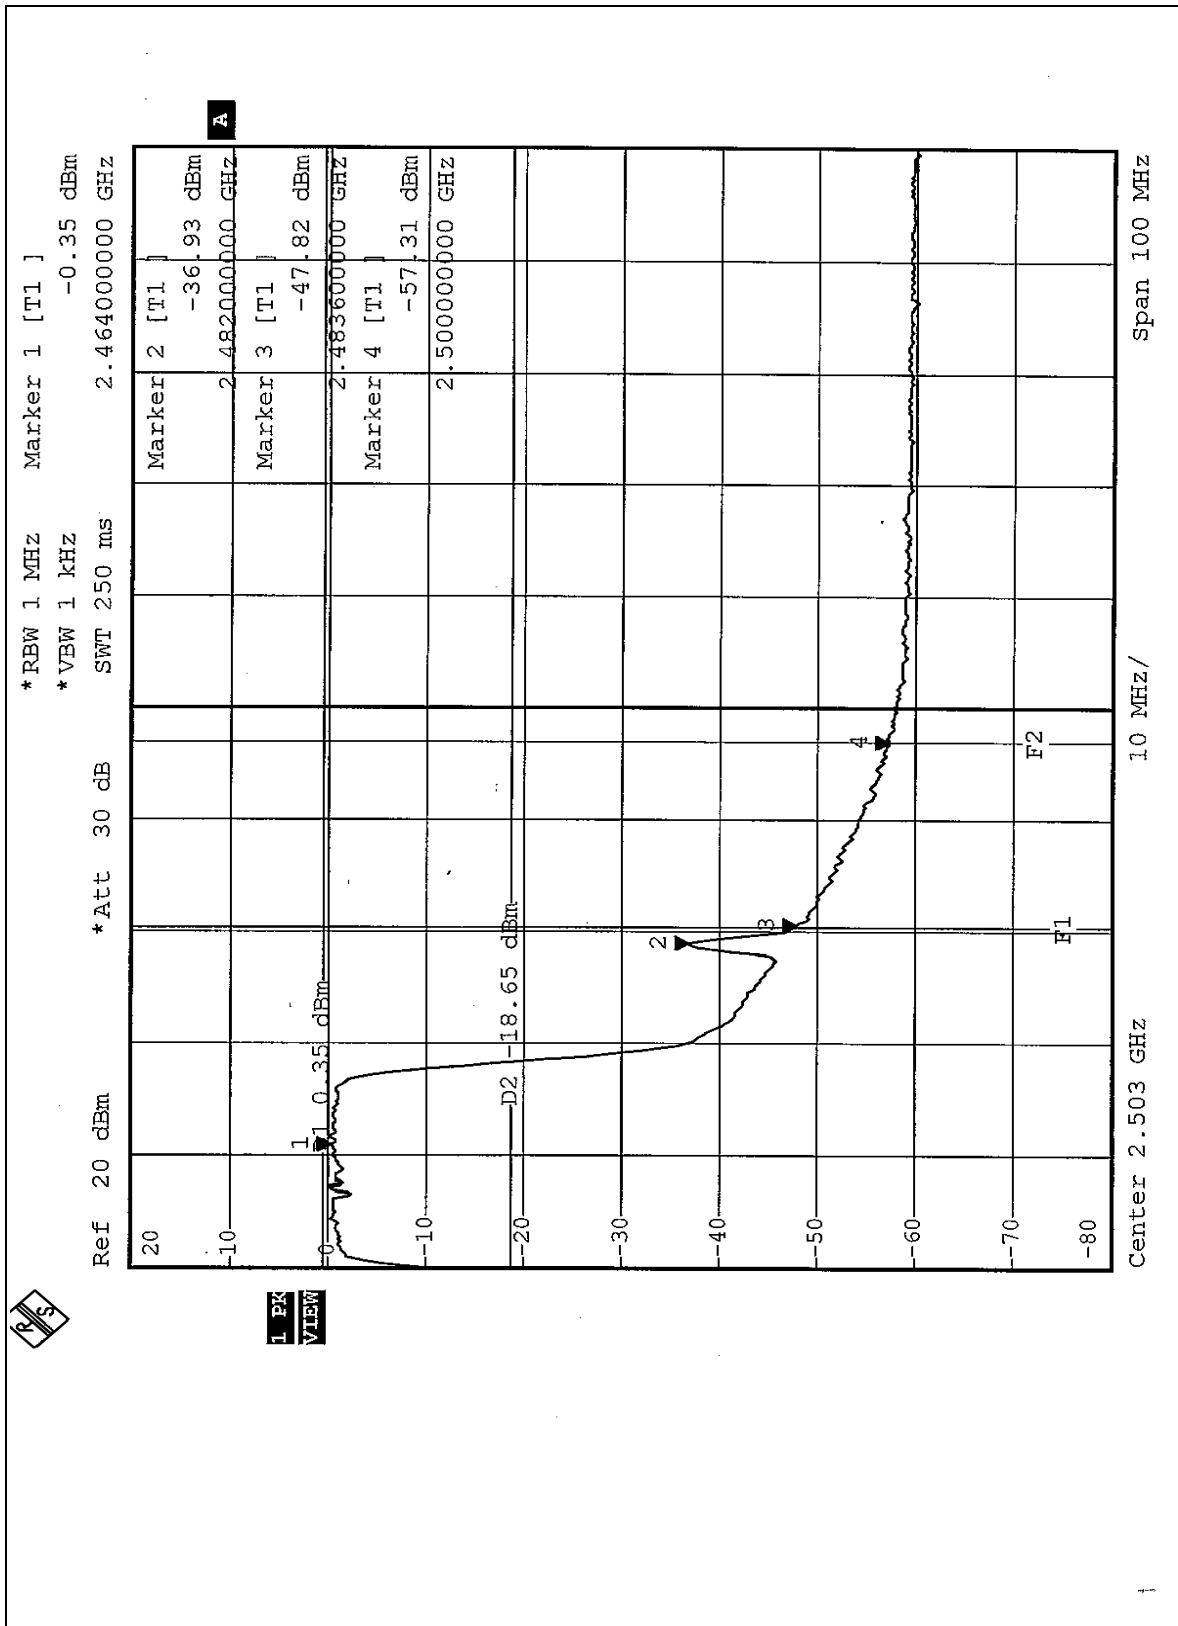

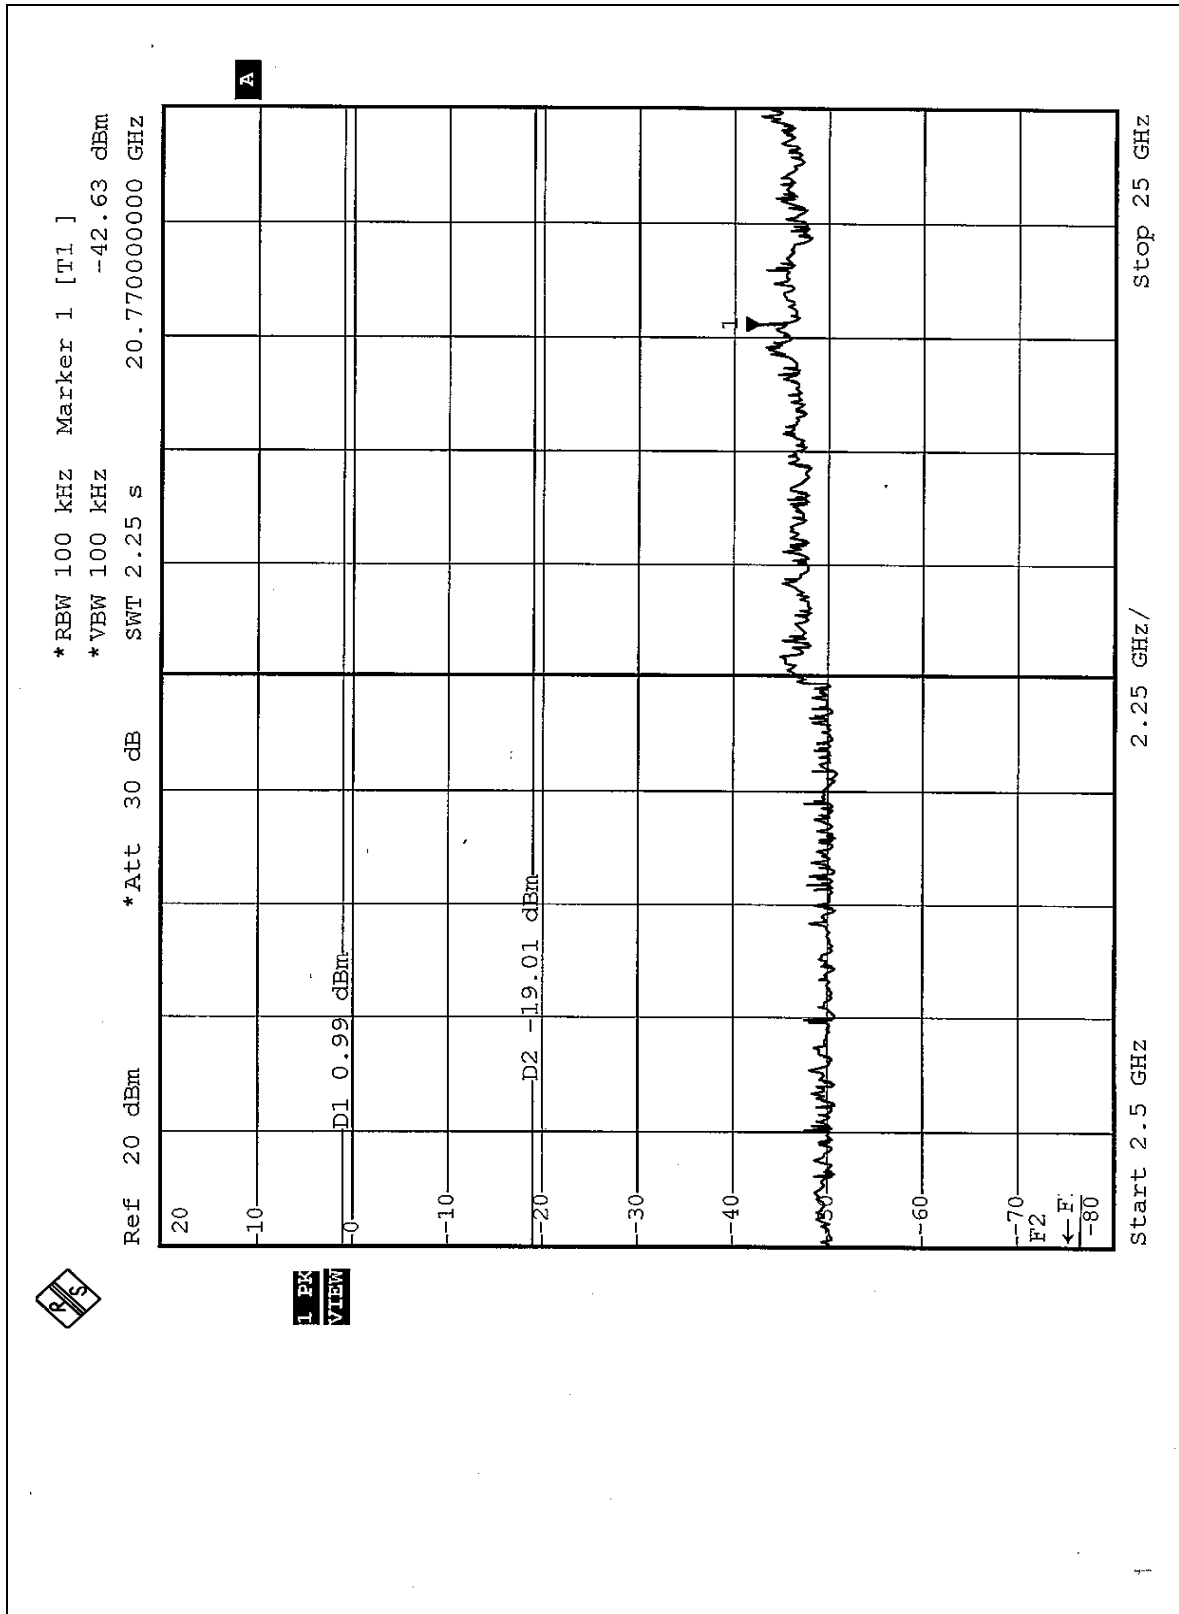



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole antenna with Reversed TNC connector. And the maximum Gain of this antenna is 7dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST (Mode A)

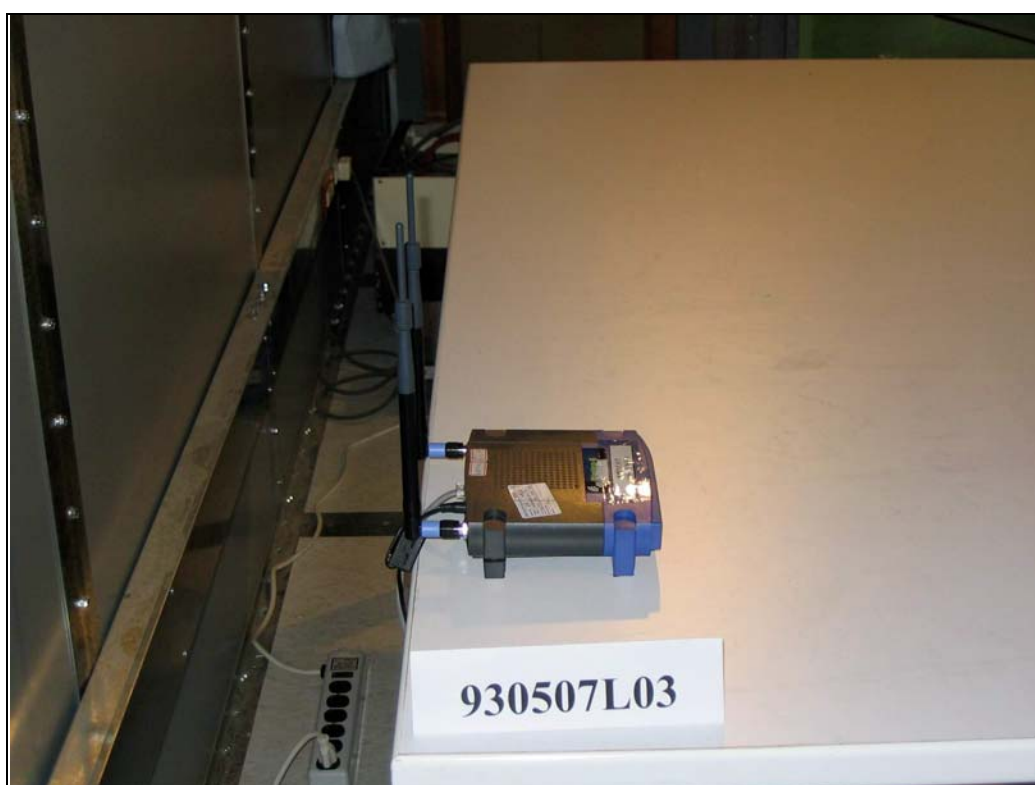



(Mode B)



RADIATED EMISSION TEST (Mode A)



(Mode B)

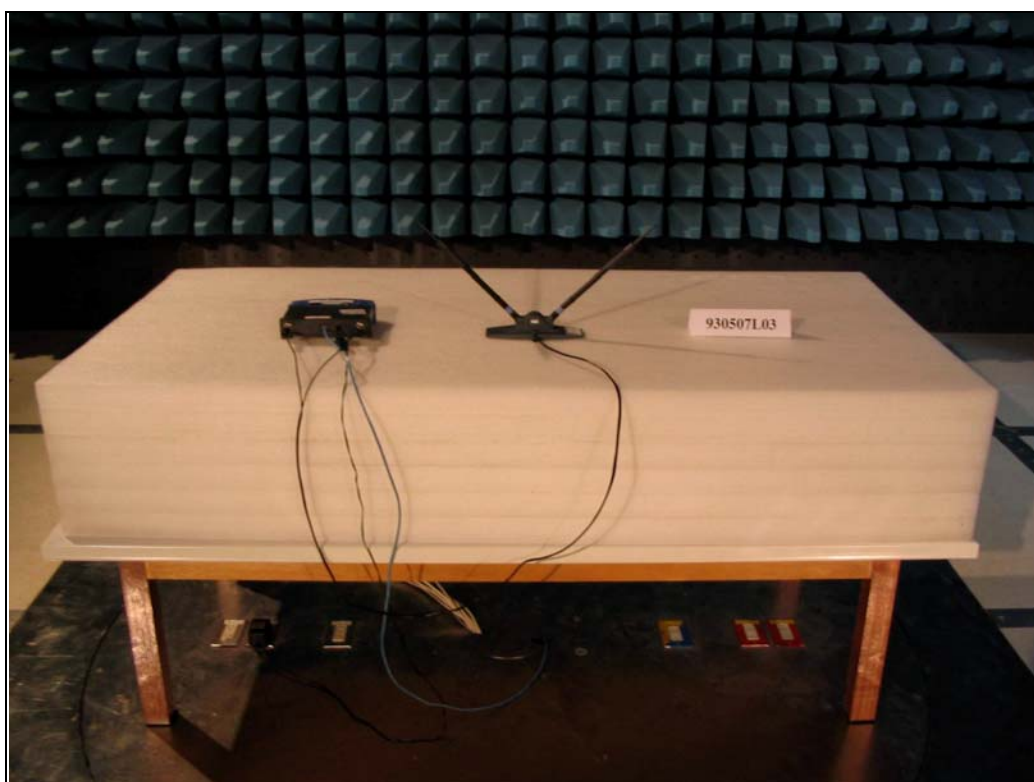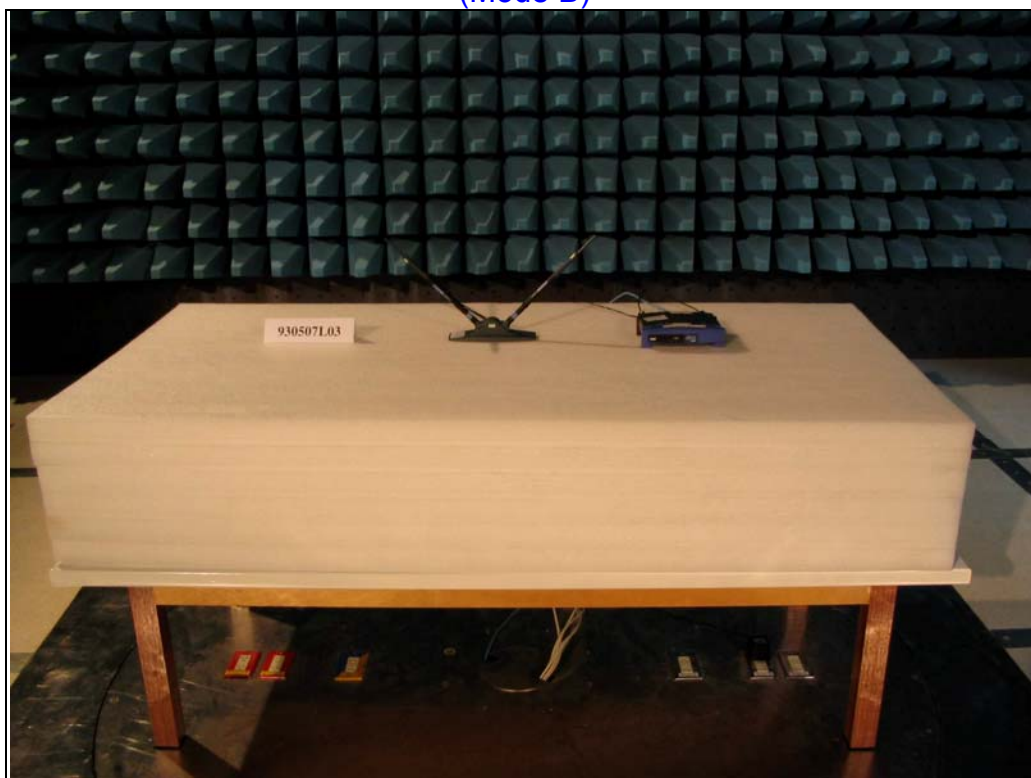



6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:
Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:
Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:
Tel: 886-3-3183232
Fax: 886-3-3185050

Linko RF Lab.
Tel: 886-3-3270910
Fax: 886-3-3270892

Email: service@mail.adt.com.tw
Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

Report Format Version 1.0