



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Linksys LLC
Applicant Address	131 Theory Drive Irvine California 92617 United States
FCC ID	Q87-LAPAC1750PO
Manufacturer's company	Linksys LLC
Manufacturer Address	131 Theory Drive Irvine California 92617 United States

Product Name	AC1750 Pro Dual Band Access Point
Brand Name	Linksys
Model No.	LAPAC1750PRO
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250MHz
Received Date	Mar. 11, 2014
Final Test Date	Apr. 21, 2014
Submission Type	Original Equipment

Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a/ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart E, KDB 789033 D01 v01r03, KDB 662911 D01 v02r01, KDB644545 D01v01r02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies	7
3.5. Table for Test Modes	8
3.6. Table for Testing Locations.....	10
3.7. Table for Supporting Units	10
3.8. Table for Parameters of Test Software Setting	11
3.9. EUT Operation during Test	12
3.10. Duty Cycle.....	13
3.11. Test Configurations	17
4. TEST RESULT	21
4.1. AC Power Line Conducted Emissions Measurement.....	21
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	25
4.3. Maximum Conducted Output Power Measurement.....	33
4.4. Power Spectral Density Measurement	37
4.5. Peak Excursion Measurement	46
4.6. Radiated Emissions Measurement	51
4.7. Band Edge Emissions Measurement	73
4.8. Frequency Stability Measurement	82
4.9. Antenna Requirements	84
5. LIST OF MEASURING EQUIPMENTS	85
6. MEASUREMENT UNCERTAINTY.....	87
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3
APPENDIX C. RADIATED EMISSION CO-LOCATION REPORT	C1 ~ C3



History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR431102AB	Rev. 01	Initial issue of report	Apr. 29, 2014



1. CERTIFICATE OF COMPLIANCE

Product Name : AC1750 Pro Dual Band Access Point
Brand Name : Linksys
Model No. : LAPAC1750PRO
Applicant : Linksys LLC
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Mar. 11, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads 'Sam Chen'. The signature is written in a cursive style with a horizontal line underneath the name.

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	11.01 dB
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	0.01 dB
4.4	15.407(a)	Power Spectral Density	Complies	0.10 dB
4.5	15.407(a)	Peak Excursion	Complies	1.62 dB
4.6	15.407(b)	Radiated Emissions	Complies	3.12 dB
4.7	15.407(b)	Band Edge Emissions	Complies	1.02 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n/ac

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter or PoE
Modulation	see the below table for IEEE 802.11n/ac
Data Modulation	For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n/ac
Frequency Range	5150 ~ 5250MHz
Channel Number	4 for 20MHz bandwidth ; 2 for 40MHz bandwidth 1 for 80MHz bandwidth
Channel Band Width (99%)	802.11ac MCS0/Nss1 (VHT20): 18.08 MHz ; 802.11ac MCS0/Nss1 (VHT40): 36.80 MHz ; 802.11ac MCS0/Nss1 (VHT80): 76.80 MHz
Maximum Conducted Output Power	<For Non-Beamforming Mode> 802.11ac MCS0/Nss1 (VHT20): 15.74 dBm ; 802.11ac MCS0/Nss1 (VHT40): 16.60 dBm ; 802.11ac MCS0/Nss1 (VHT80): 16.88 dBm <For Beamforming Mode> 802.11ac MCS2/Nss1 (VHT20): 14.74 dBm ; 802.11ac MCS2/Nss1 (VHT40): 14.81 dBm ; 802.11ac MCS2/Nss1 (VHT80): 14.48 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

IEEE 802.11a

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5150 ~ 5250MHz
Channel Number	4
Channel Band Width (99%)	17.28 MHz
Maximum Conducted Output Power	15.66 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
Beamforming Function	<input checked="" type="checkbox"/> With beamforming for 802.11n/ac in 5GHz.	<input type="checkbox"/> Without beamforming

Antenna and Band width

Antenna	Three (TX)		
	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	3	MCS 0-23
802.11n (HT40)	3	MCS 0-23
802.11ac (VHT20)	3	MCS 0-9/Nss1-3
802.11ac (VHT40)	3	MCS 0-9/Nss1-3
802.11ac (VHT80)	3	MCS 0-9/Nss1-3

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).
Then EUT support HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:
HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

3.2. Accessories

Power	Brand	Model	Rating
Adapter 1 (Fixed plug)	HON-KWANG	HK-AJ-120A200-US	INPUT: 100-240V~50-60Hz, 0.8A OUTPUT: 12V, 2A
Adapter 2 (Interchangeable plug)	HON-KWANG	HK-AX-120A200-CP	INPUT: 100-240V~50-60Hz, 0.8A OUTPUT: 12V, 2A
Others			
FCC Plug*1 (only for Adapter 2)			
Cradle*1			

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz B1
1	Airgain	M2410DCR-G200U	PIFA Antenna	I-PEX	4.3	-
	Airgain	M2410DCR-G130U	PIFA Antenna	I-PEX	-	3.6
2	Airgain	M2410DCR-G65U	PIFA Antenna	I-PEX	4.4	-
	Airgain	M2410DCR-G65U	PIFA Antenna	I-PEX	-	3.0
3	Airgain	M2410DCR-G130U	PIFA Antenna	I-PEX	4.1	-
	Airgain	M2410DCR-G200U	PIFA Antenna	I-PEX	-	3.6

Note: The EUT has three antennas.

For 2.4GHz

For IEEE 802.11b/g/n mode (3TX/3RX)

Ant. 1, Ant. 2 and Ant. 3 can be used as transmitting/receiving antennas.


Ant. 1, Ant. 2 and Ant. 3 could transmit/receive simultaneously.

For 5GHz

For IEEE 802.11a/n/ac mode (3TX/3RX)

Ant. 1, Ant. 2 and Ant. 3 can be used as transmitting/receiving antennas.

Ant. 1, Ant. 2 and Ant. 3 could transmit/receive simultaneously.

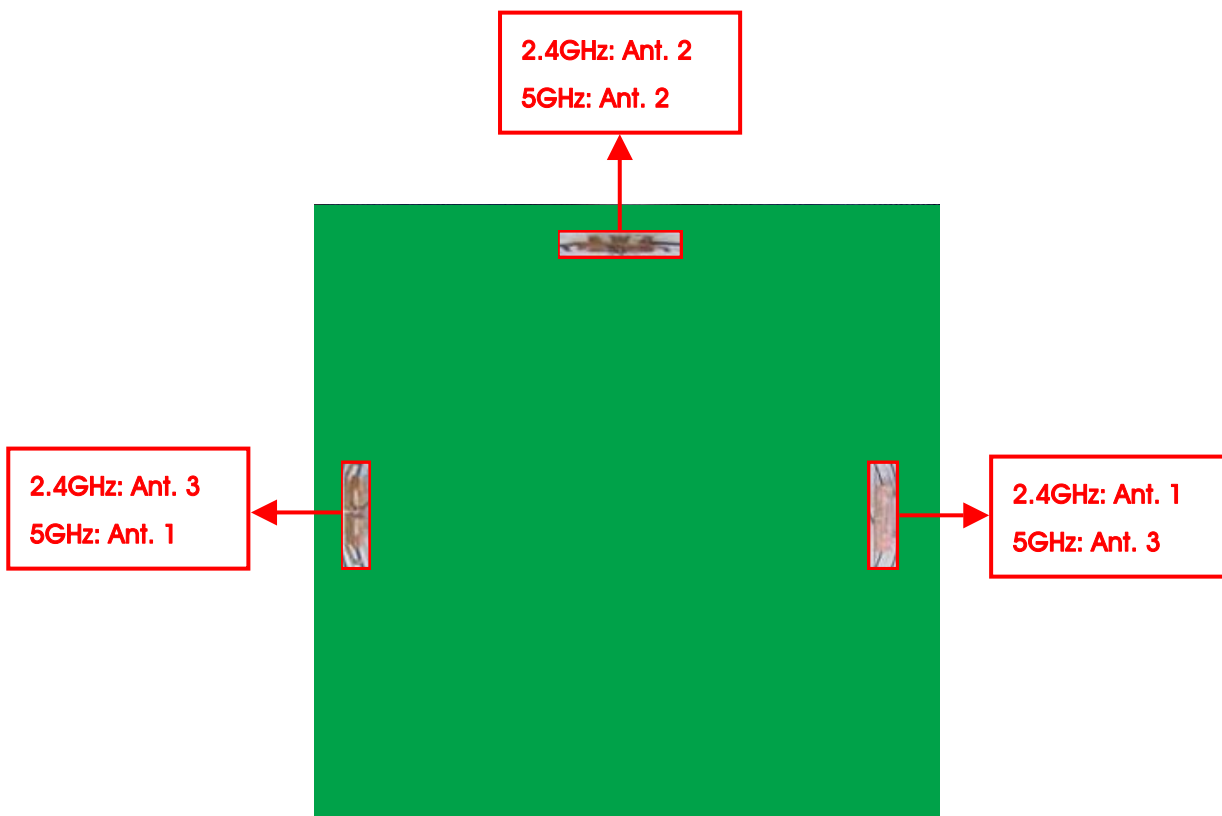

3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48.

For 40MHz bandwidth systems, use Channel 38, 46.

For 80MHz bandwidth systems, use Channel 42.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Antenna
AC Power Conducted Emission	Normal Link		-	-	-
Max. Conducted Output Power	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3
	11a/BPSK	Band 1	6Mbps	36/40/48	1+2+3
Power Spectral Density	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3
	11a/BPSK	Band 1	6Mbps	36/40/48	1+2+3
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3
	11a/BPSK	Band 1	6Mbps	36/40/48	1+2+3
Peak Excursion	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3
	11a/BPSK	Band 1	6Mbps	36/40/48	1+2+3
Radiated Emission Below 1GHz	Normal Link		-	-	-
Radiated Emission Above 1GHz	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3
	11a/BPSK	Band 1	6Mbps	36/40/48	1+2+3
Band Edge Emission	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3
	11a/BPSK	Band 1	6Mbps	36/40/48	1+2+3
Frequency Stability	Un-modulation		-	40	1+2+3

Note 1: VHT20/VHT40 covers HT20/HT40, due to same modulation.

Note 2: There are two modes of EUT, one is beamforming mode, and the other is non-beamforming mode for 802.11n/ac in 5GHz, Beamforming mode and non-beamforming mode has been test and record in this test report.

Note 3: VHT20/40/80 only tested output power and PSD for beamforming mode, because beamforming mode's output power was less than that of non-beamforming mode in 5GHz band 1.

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. EUT + Adapter 1

Mode 2. EUT + Adapter 2

Mode 3. EUT + PoE

Mode 3 is the worst case, so it was selected to record in this test report.

For Radiated Emission test below 1GHz:

Mode 1. Laying of EUT with cradle + Adapter 1

Mode 2. Stand of EUT without cradle + Adapter 1

Mode 2 has been evaluated to be the worst case among Mode 1~2, thus measurement for Mode 3 ~ 4 will follow this same test mode.

Mode 3. Stand of EUT without cradle + Adapter 2

Mode 4. Stand of EUT without cradle + PoE

For Radiated Emission test below 1GHz:

Mode 2 generated the worst test result, so it was recorded in this report.

For Radiated Emission test above 1GHz:

Mode 1. Laying of EUT

Mode 2. Stand of EUT

Mode 2 generated the worst test result, so it was recorded in this report.

For Co-location MPE and Radiated Emission Co-location Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to Appendix B) and Radiated Emission Co-location (please refer to Appendix C) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Supporting Units

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
Notebook *4	DELL	E6430	DoC
PoE	Linksys	LACP130	N/A

For Test Site No: 03CH01-CB / Below 1GHz

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1340	E2K4965AGNM
Notebook	DELL	E6430	DoC
Notebook	DELL	D420	E2KWM3945ABG
Notebook	DELL	M1330	E2K4965AGNM

For Test Site No: 03CH01-CB / Above 1GHz <For Non-Beamforming Mode>

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1340	E2K4965AGNM

For Test Site No: 03CH01-CB / Above 1GHz <For Beamforming Mode>

Support Unit	Brand	Model	FCC ID
Notebook	DELL	D420	E2KWM3945ABG
Notebook	DELL	M1330	E2K4965AGNM
WLAN AC Dongle	Netgear	A6200	PY31220200

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

<For Non-Beamforming Mode>

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT20

Test Software Version	Mtool_2.0.0.6		
Frequency	5180 MHz	5200 MHz	5240 MHz
MCS0/Nss1 VHT20	44	42	43

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT40

Test Software Version	Mtool_2.0.0.6	
Frequency	5190 MHz	5230 MHz
MCS0/Nss1 VHT40	46	45

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT80

Test Software Version	Mtool_2.0.0.6
Frequency	5210 MHz
MCS0/Nss1 VHT80	49

Power Parameters of IEEE 802.11a

Test Software Version	Mtool_2.0.0.6		
Frequency	5180 MHz	5200 MHz	5240 MHz
802.11a	43	42	43

<For Beamforming Mode>

Power Parameters of IEEE 802.11ac MCS2/Nss1 VHT20

Test Software Version	Mtool_2.0.0.6		
Frequency	5180 MHz	5200 MHz	5240 MHz
MCS2/Nss1 VHT20	42	42	29

Power Parameters of IEEE 802.11ac MCS2/Nss1 VHT40

Test Software Version	Mtool_2.0.0.6	
Frequency	5190 MHz	5230 MHz
MCS2/Nss1 VHT40	42	42

Power Parameters of IEEE 802.11ac MCS2/Nss1 VHT80

Test Software Version	Mtool_2.0.0.6
Frequency	5210 MHz
MCS2/Nss1 VHT80	44

3.9. EUT Operation during Test

For non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN XP were executed.


The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe " to link with the remote workstation to receive and transmit packet by WLAN AC Dongle and transmit duty cycle no less 98%

3.10. Duty Cycle


<For non-beamforming mode>

IEEE 802.11ac MCS0/Nss1 VHT20

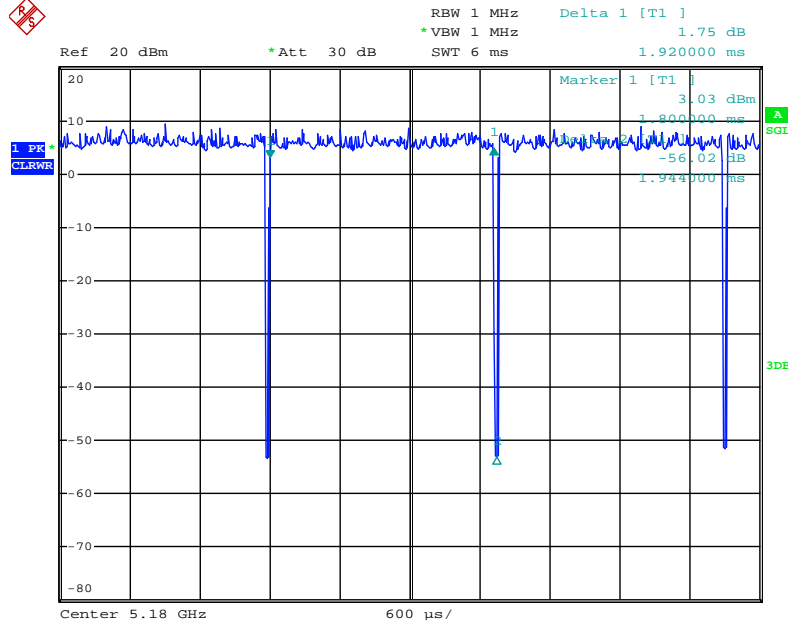


Date: 1.APR.2014 21:54:18

IEEE 802.11ac MCS0/Nss1 VHT40

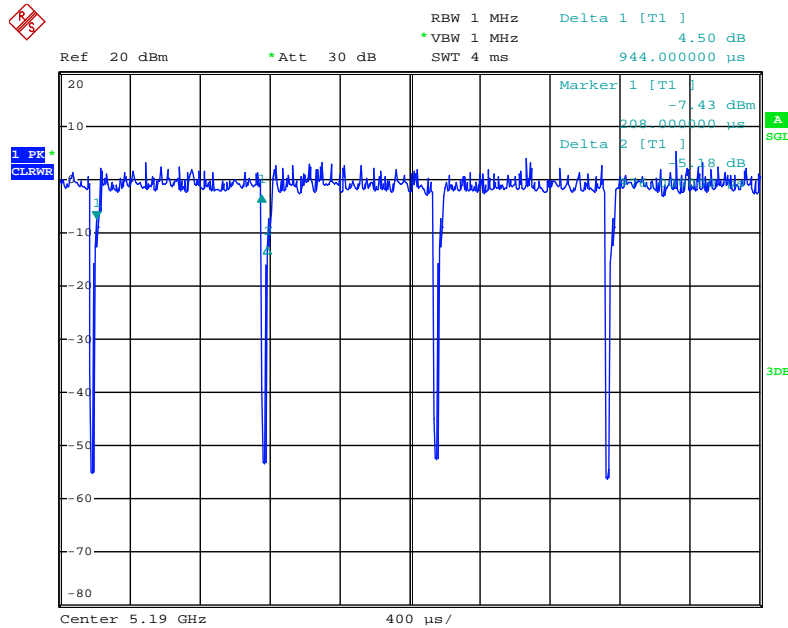


Date: 1.APR.2014 21:55:34

IEEE 802.11ac MCS0/Nss1 VHT80

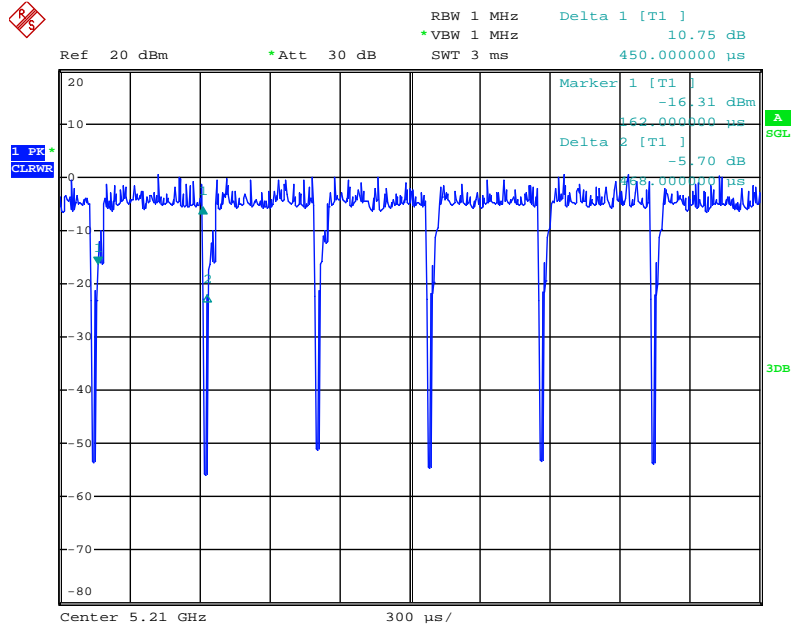

Date: 1.APR.2014 21:59:32


IEEE 802.11a

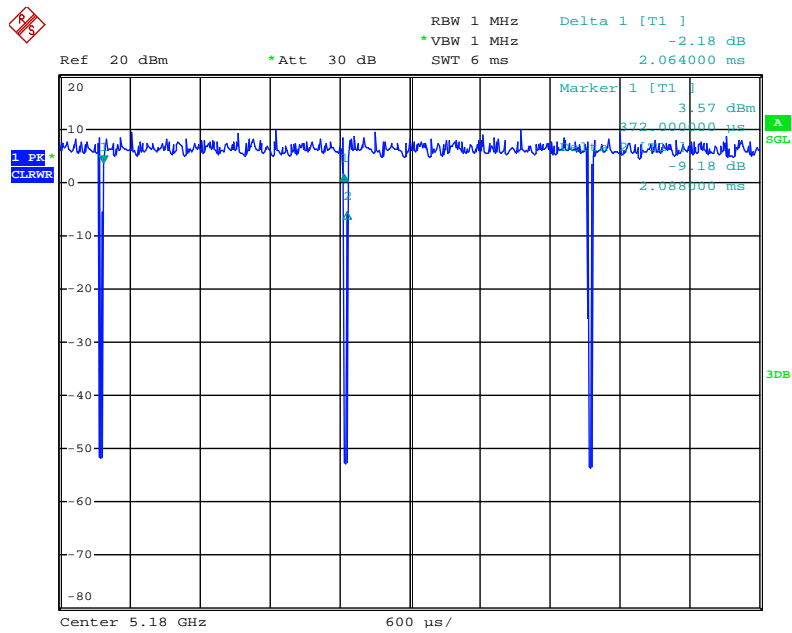

Date: 1.APR.2014 21:52:53


<For beamforming mode>

IEEE 802.11ac MCS2/Nss1 VHT20

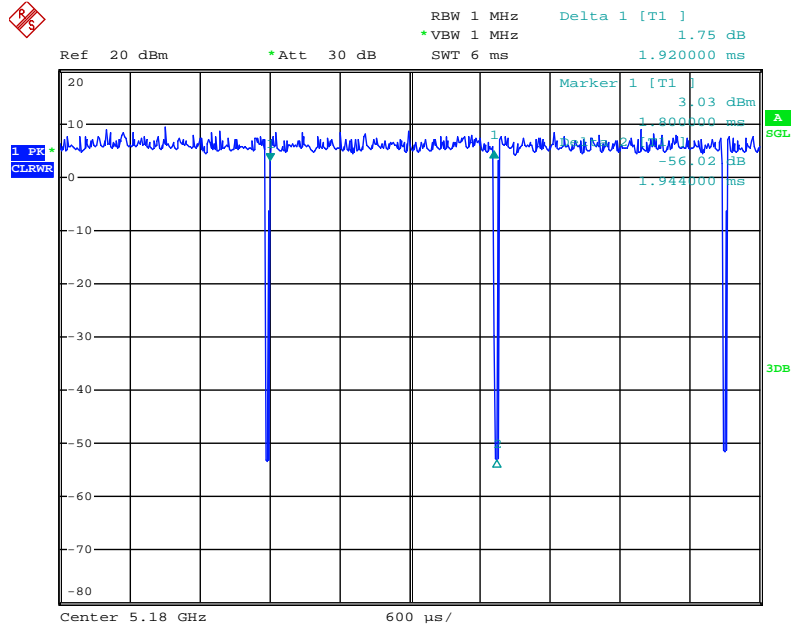


Date: 1.APR.2014 21:54:18

IEEE 802.11ac MCS2/Nss1 VHT40

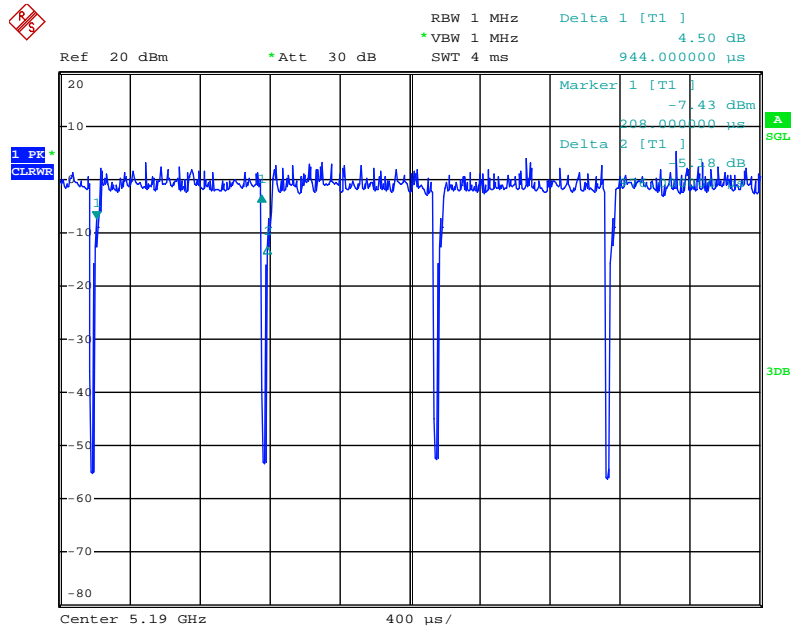

Date: 1.APR.2014 21:55:34


IEEE 802.11ac MCS2/Nss1 VHT80

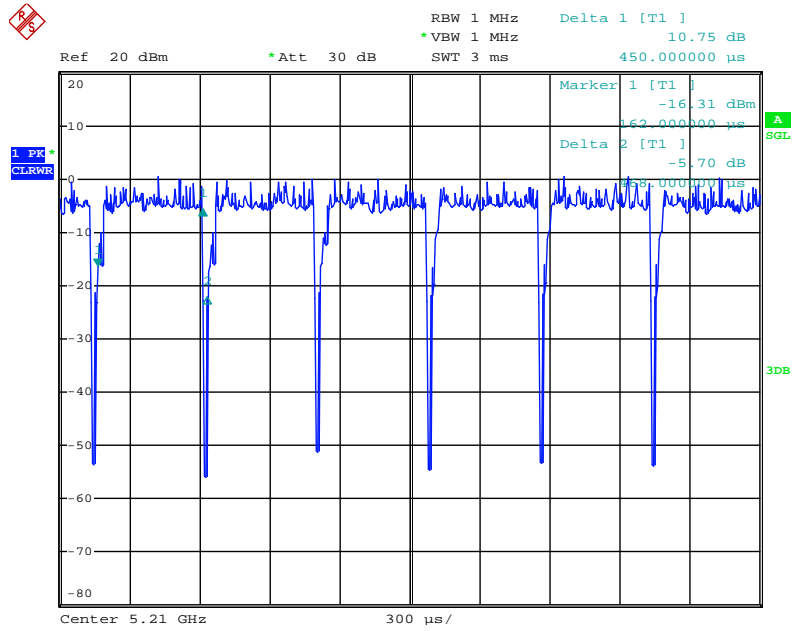

Date: 1.APR.2014 21:59:32

3.11. Test Configurations


3.11.1. AC Power Line Conduction Emissions Test Configuration

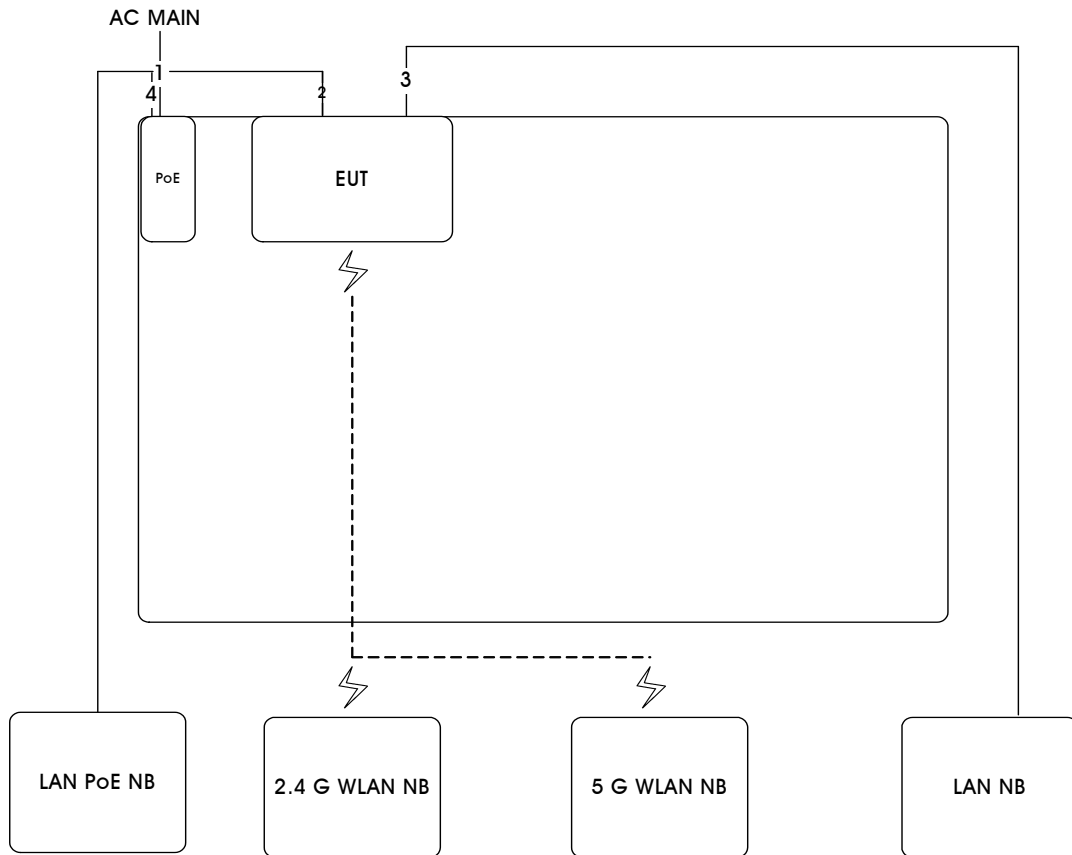

Item	Connection	Shield	Length(m)
1	Power Cable	No	1.8m
2	RJ-45 Cable	No	0.8m
3	RJ-45 Cable	No	10m
4	RJ-45 Cable	No	10m


3.11.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

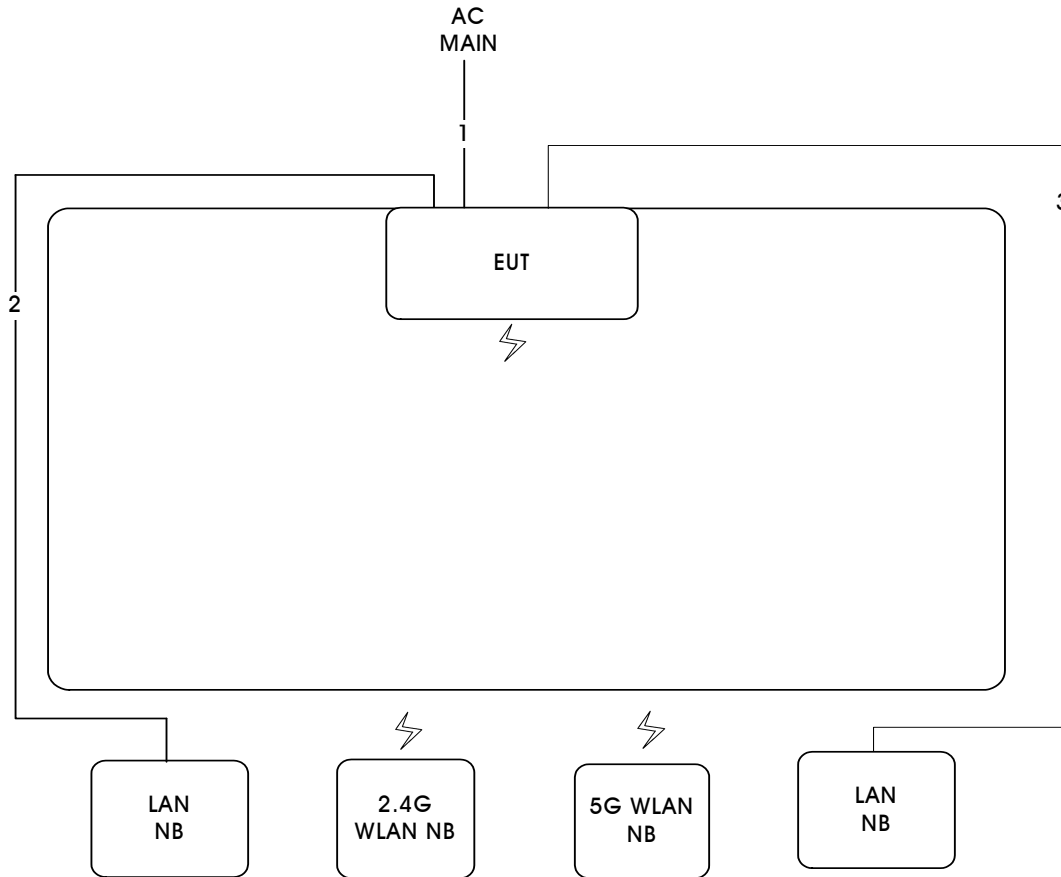


Item	Connection	Shield	Length(m)
1	Power Cable	No	1.5m
2	RJ-45 Cable	No	10m
3	RJ-45 Cable	No	10m

Test Configuration: above 1GHz < For Non-Beamforming Mode >

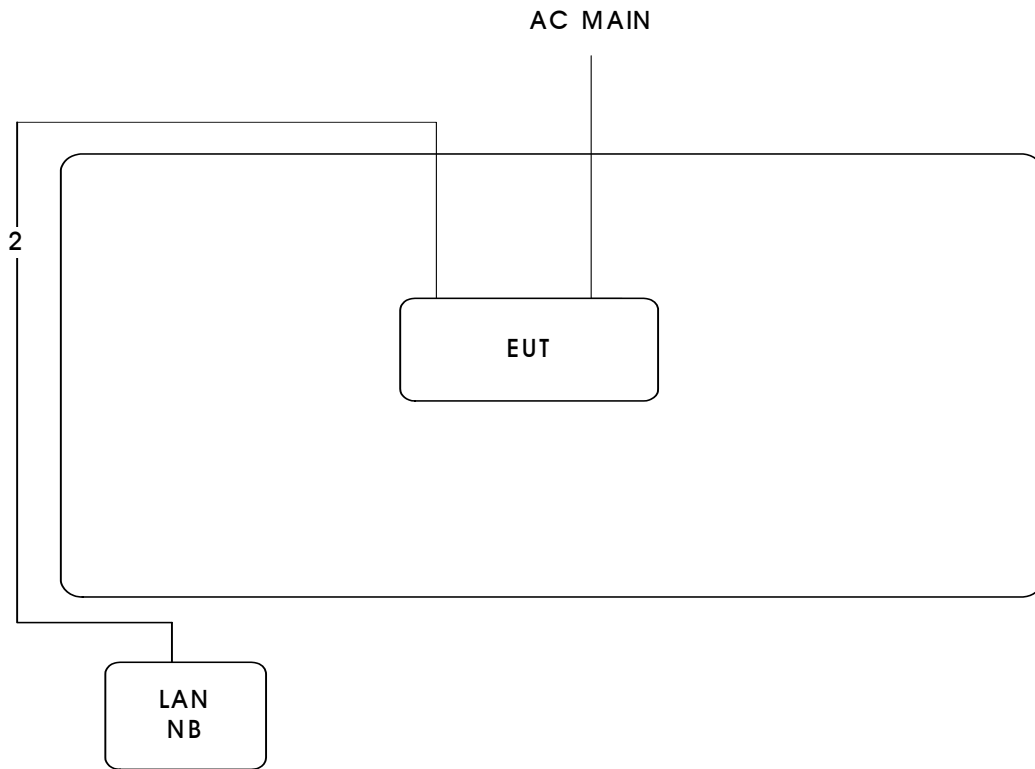

Item	Connection	Shield	Length(m)
1	Power Cable	No	1.5m
2	RJ-45 Cable	No	10m

Test Configuration: above 1GHz <For Beamforming Mode>

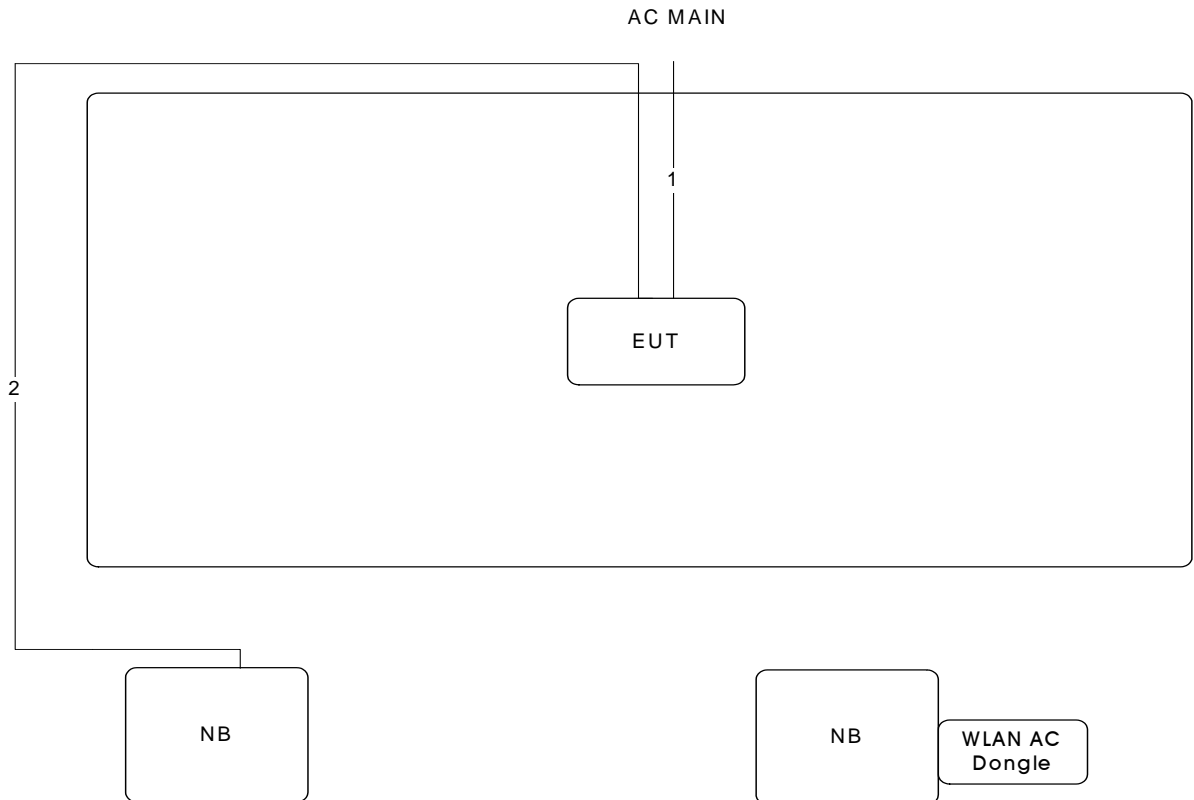

Item	Connection	Shield	Length(m)
1	Power Cable	No	1.5m
2	RJ-45 Cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

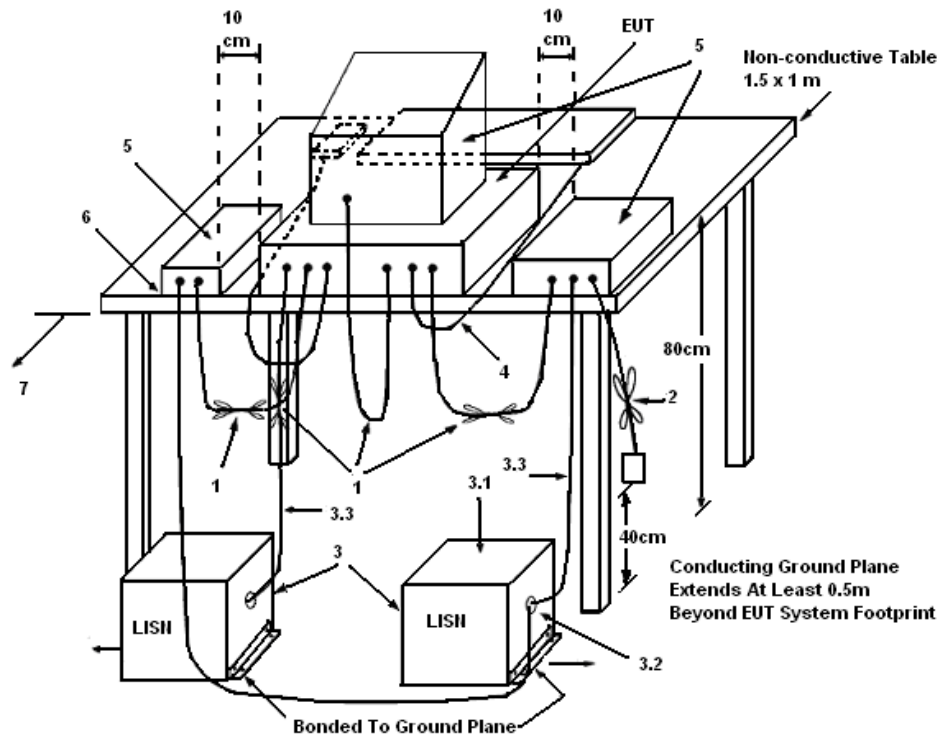

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	54%
Test Engineer	Sollo Luo	Phase	Line
Configuration	Normal Link	Test Mode	Mode 3

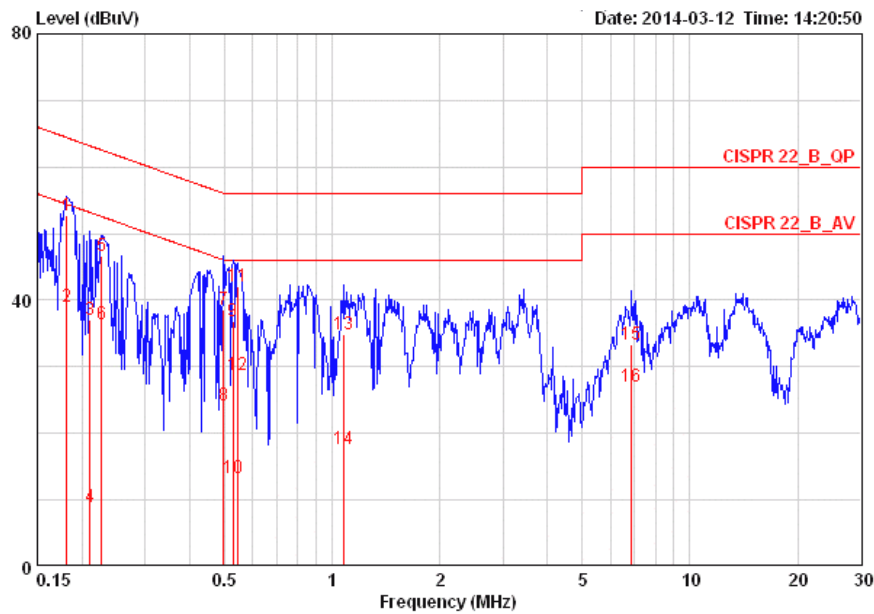

	Freq	Level	Over Limit	Limit Line	LISN Factor	Read Level	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dB	dBuV	dB		
1	0.18152	52.76	-11.65	64.42	0.15	52.42	0.19	LINE	QP
2	0.18152	38.99	-15.42	54.42	0.15	38.65	0.19	LINE	AVERAGE
3	0.21055	36.96	-26.22	63.18	0.15	36.61	0.20	LINE	QP
4	0.21055	9.00	-44.18	53.18	0.15	8.65	0.20	LINE	AVERAGE
5	0.22676	46.74	-15.83	62.57	0.15	46.39	0.20	LINE	QP
6	0.22676	36.30	-16.27	52.57	0.15	35.95	0.20	LINE	AVERAGE
7	0.49673	38.58	-17.47	56.05	0.15	38.23	0.20	LINE	QP
8	0.49673	24.13	-21.92	46.05	0.15	23.78	0.20	LINE	AVERAGE
9	0.52934	36.79	-19.21	56.00	0.15	36.44	0.20	LINE	QP
10	0.52934	13.36	-32.64	46.00	0.15	13.01	0.20	LINE	AVERAGE
11	0.54355	41.98	-14.02	56.00	0.15	41.63	0.20	LINE	QP
12	0.54355	28.70	-17.30	46.00	0.15	28.35	0.20	LINE	AVERAGE
13	1.082	34.82	-21.18	56.00	0.16	34.45	0.20	LINE	QP
14	1.082	17.58	-28.42	46.00	0.16	17.21	0.20	LINE	AVERAGE
15	6.878	33.30	-26.70	60.00	0.32	32.67	0.30	LINE	QP
16	6.878	27.06	-22.94	50.00	0.32	26.43	0.30	LINE	AVERAGE

Temperature	24°C	Humidity	54%
Test Engineer	Sollo Luo	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 3

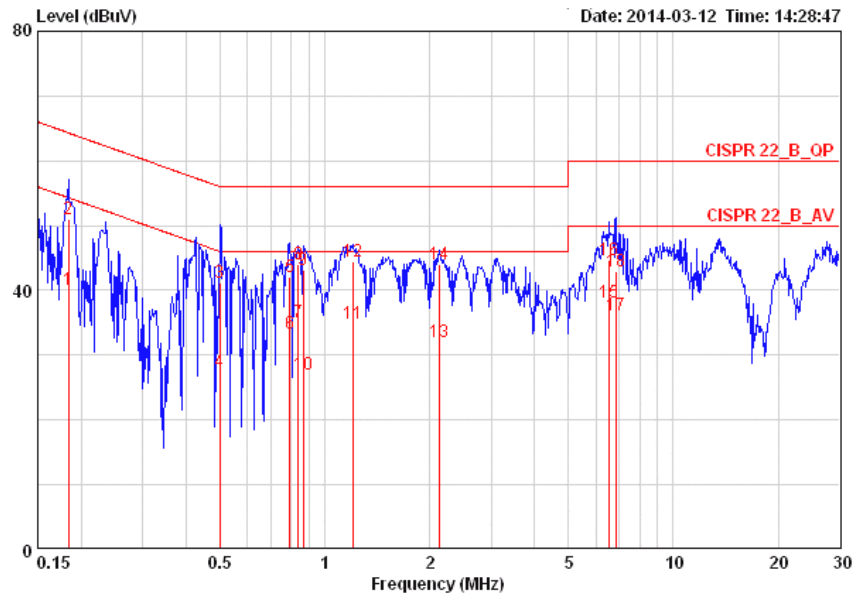

	Freq	Level	Over	Limit	LISN	Read	Cable	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dB	dBuV	dB		
1	0.18346	40.09	-14.23	54.33	0.07	39.83	0.19	NEUTRAL	AVERAGE
2	0.18346	51.01	-13.31	64.33	0.07	50.75	0.19	NEUTRAL	QP
3	0.49937	41.30	-14.71	56.01	0.07	41.03	0.20	NEUTRAL	QP
4	0.49937	27.46	-18.55	46.01	0.07	27.19	0.20	NEUTRAL	AVERAGE
5	0.79180	42.10	-13.90	56.00	0.08	41.82	0.20	NEUTRAL	QP
6	0.79180	33.34	-12.66	46.00	0.08	33.06	0.20	NEUTRAL	AVERAGE
7	0.83932	34.99	-11.01	46.00	0.08	34.71	0.20	NEUTRAL	AVERAGE
8	0.83932	43.99	-12.01	56.00	0.08	43.71	0.20	NEUTRAL	QP
9	0.86643	43.10	-12.90	56.00	0.08	42.82	0.20	NEUTRAL	QP
10	0.86643	26.98	-19.02	46.00	0.08	26.70	0.20	NEUTRAL	AVERAGE
11	1.203	34.90	-11.10	46.00	0.09	34.61	0.21	NEUTRAL	AVERAGE
12	1.203	44.43	-11.57	56.00	0.09	44.14	0.21	NEUTRAL	QP
13	2.133	32.02	-13.98	46.00	0.11	31.68	0.23	NEUTRAL	AVERAGE
14	2.133	44.00	-12.00	56.00	0.11	43.66	0.23	NEUTRAL	QP
15	6.523	38.05	-11.95	50.00	0.19	37.55	0.31	NEUTRAL	AVERAGE
16	6.523	44.69	-15.31	60.00	0.19	44.19	0.31	NEUTRAL	QP
17	6.841	36.29	-13.71	50.00	0.20	35.79	0.30	NEUTRAL	AVERAGE
18	6.841	43.05	-16.95	60.00	0.20	42.55	0.30	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits.

4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.2.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	20°C	Humidity	52%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac

<For Non-Beamforming Mode>

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	20.64	18.08
40	5200 MHz	20.32	18.08
48	5240 MHz	20.48	17.92

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	39.36	36.48
46	5230 MHz	39.68	36.80

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
42	5210 MHz	82.56	76.80




Temperature	20°C	Humidity	52%
Test Engineer	Jim Huang	Configurations	IEEE 802.11a

Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	20.00	16.96
40	5200 MHz	20.00	17.28
48	5240 MHz	20.16	17.12


<For Non-Beamforming Mode>

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5180 MHz

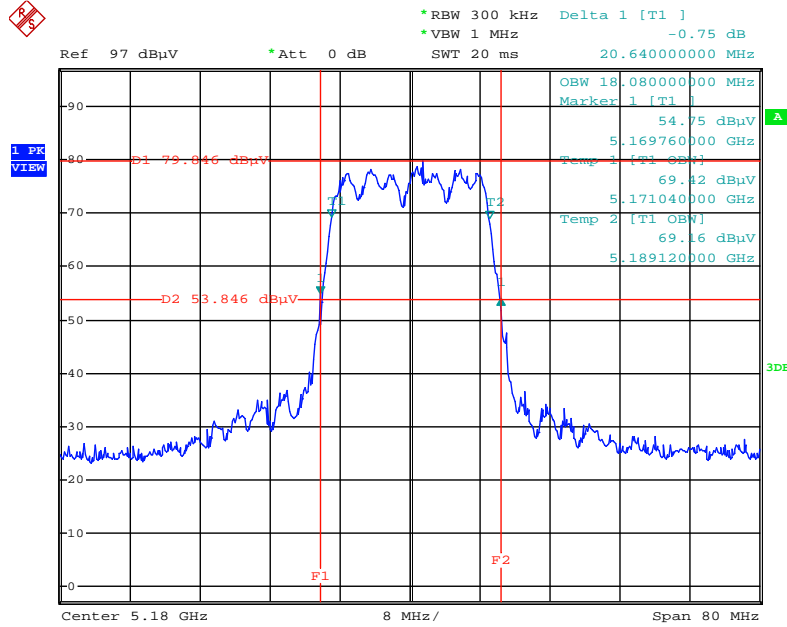


Date: 1.APR.2014 22:59:57

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5200 MHz

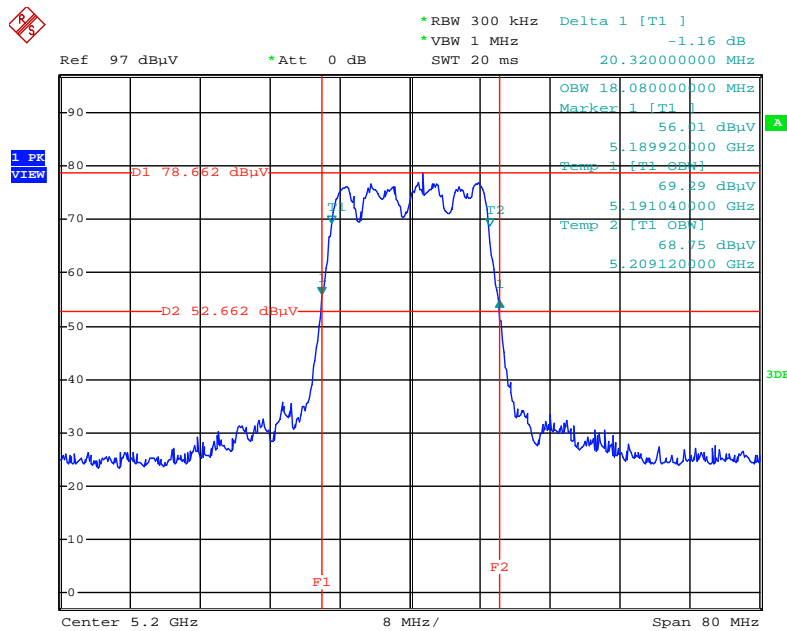


Date: 1.APR.2014 23:00:37

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5240 MHz

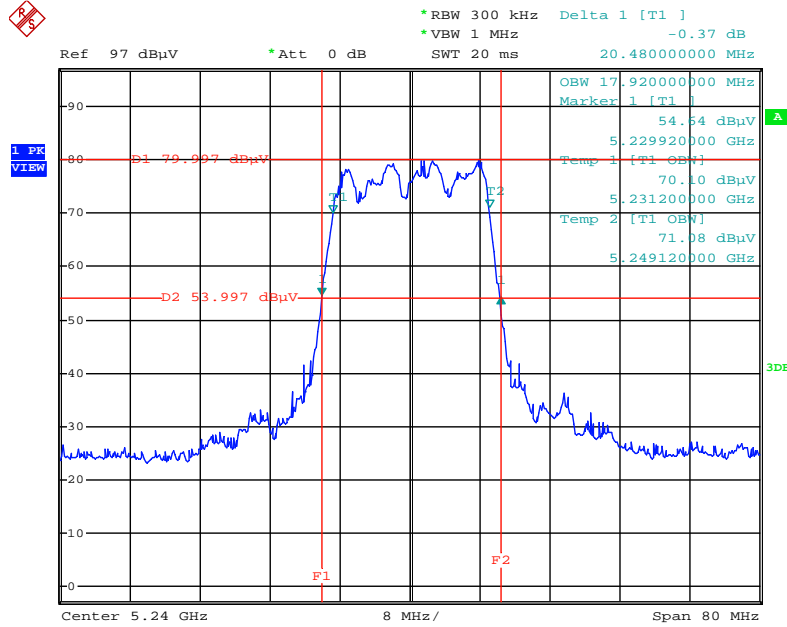


Date: 1.APR.2014 23:01:17

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5190 MHz

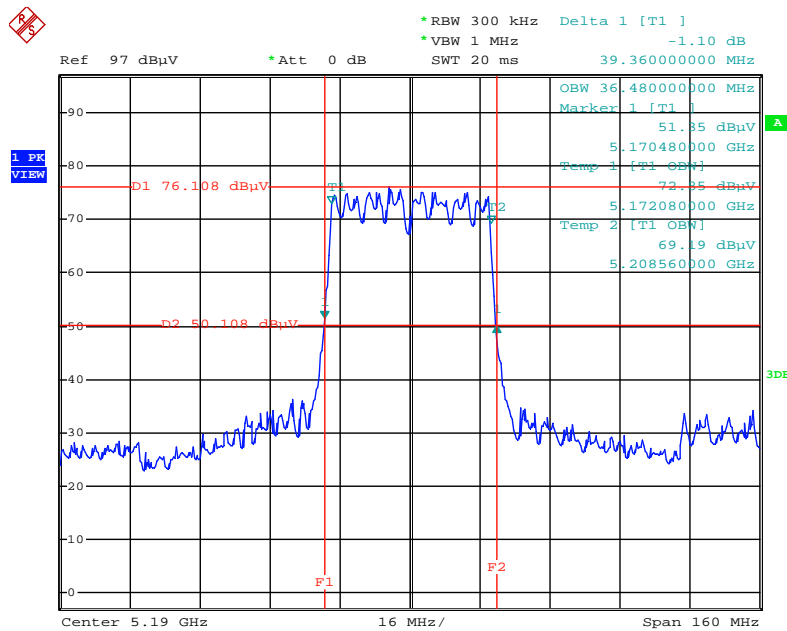


Date: 1.APR.2014 23:02:07

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5230 MHz

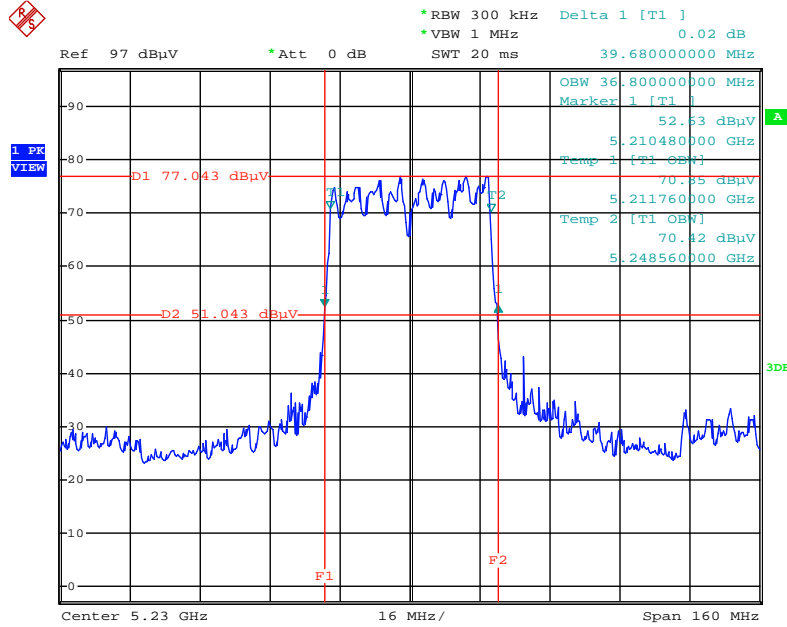


Date: 1.APR.2014 23:02:51

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5210 MHz

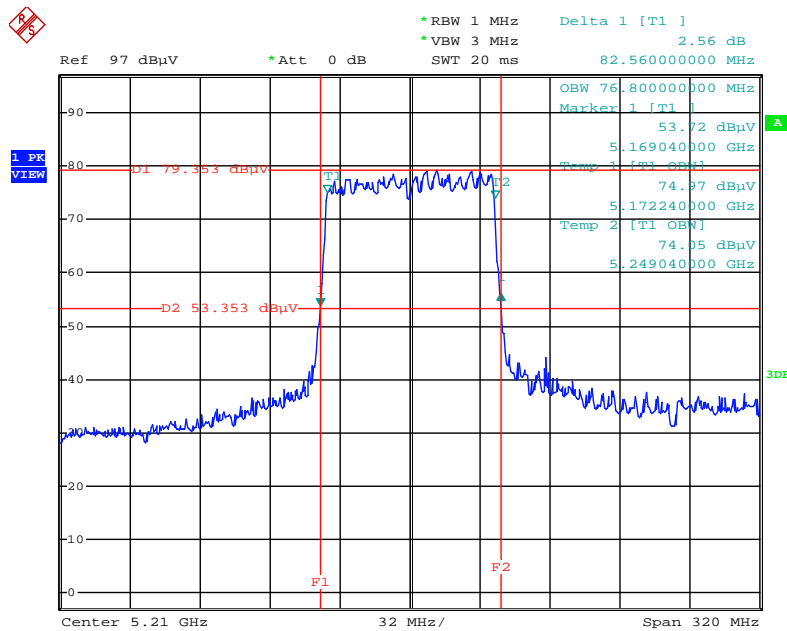


Date: 1.APR.2014 23:04:16

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5180 MHz

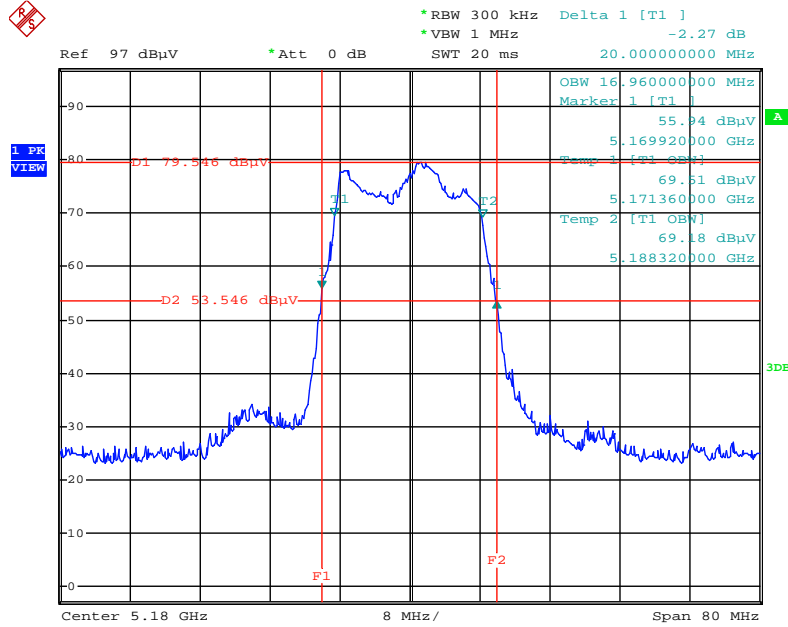


Date: 1.APR.2014 22:56:11

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5200 MHz

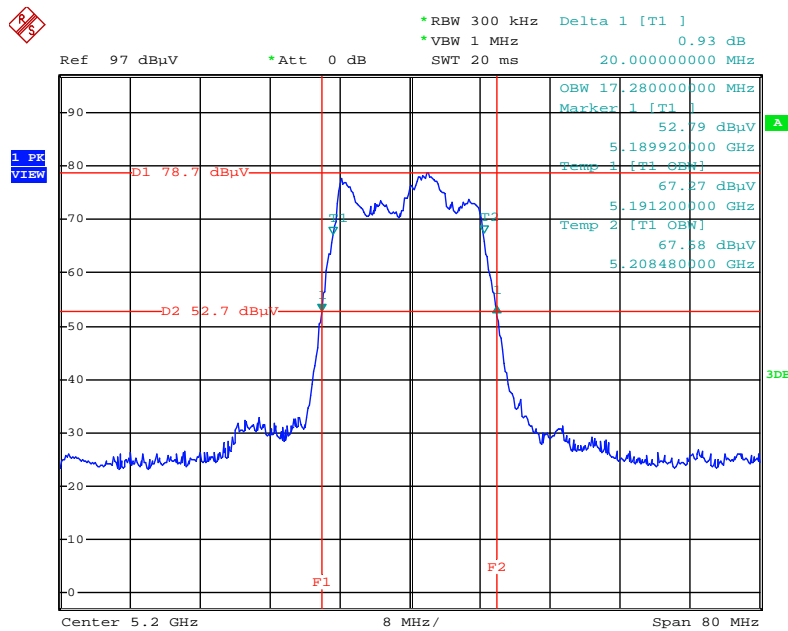

Date: 1.APR.2014 22:56:56

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5240 MHz

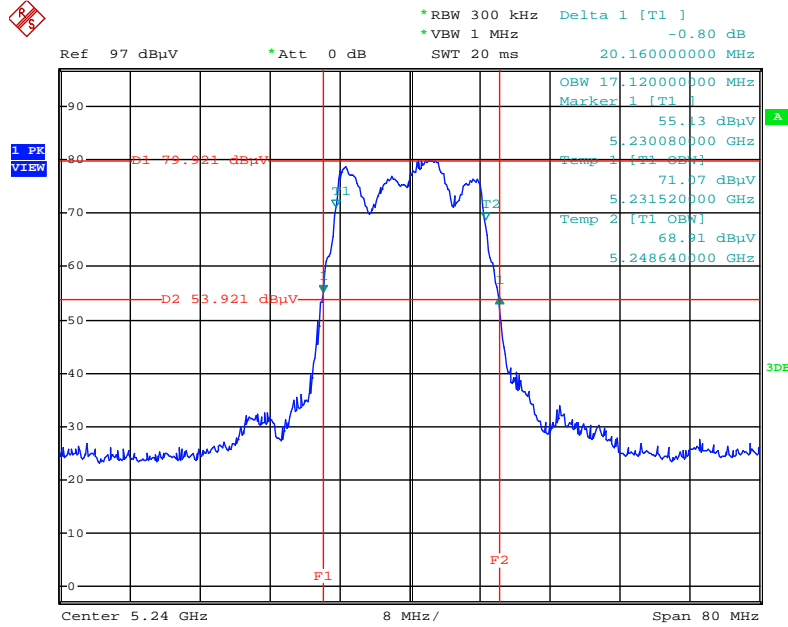

Date: 1.APR.2014 22:57:32

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or $4 \text{ dBm} + 10\log B$, where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (E) Maximum conducted output power =>(3) Method PM (Measurement using an RF average power meter) Multiple antenna systems was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.3.4. Test Setup Layout



4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Maximum Conducted Output Power

Temperature	20°C	Humidity	52%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac
Test Mode	Apr. 01, 2014		

<For Non-Beamforming Mode>

Configuration IEEE 802.11ac MCS0/Nss1 VHT20

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
36	5180 MHz	10.95	10.99	10.96	15.74	17.00	Complies
40	5200 MHz	10.48	10.47	10.28	15.18	17.00	Complies
48	5240 MHz	10.93	10.82	10.72	15.60	17.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT40

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
38	5190 MHz	11.78	11.88	11.82	16.60	17.00	Complies
46	5230 MHz	11.58	11.73	11.46	16.36	17.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT80

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
42	5210 MHz	12.26	12.15	11.90	16.88	17.00	Complies

Temperature	20°C	Humidity	52%
Test Engineer	Jim Huang	Configurations	IEEE 802.11a
Test Mode	Apr. 01, 2014		

Configuration IEEE 802.11a

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
36	5180 MHz	10.78	10.81	10.67	15.52	17.00	Complies
40	5200 MHz	10.44	10.46	10.07	15.10	17.00	Complies
48	5240 MHz	11.06	11.00	10.58	15.66	17.00	Complies

Temperature	20°C	Humidity	52%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac
Test Mode	Apr. 21, 2014		

<For Beamforming Mode>

Configuration IEEE 802.11ac MCS2/Nss1 VHT20

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
36	5180 MHz	9.76	10.03	9.76	14.62	14.82	Complies
40	5200 MHz	9.79	10.12	9.98	14.74	14.82	Complies
48	5240 MHz	6.43	6.54	6.09	11.13	14.82	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$
 $= 8.18 \text{ dBi} > 6 \text{ dBi}$, So Band 1 Limit = $17 - (8.18 - 6) = 14.82 \text{ dBm}$

Configuration IEEE 802.11ac MCS2/Nss1 VHT40

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
38	5190 MHz	10.12	10.14	9.78	14.79	14.82	Complies
46	5230 MHz	10.02	10.15	9.93	14.81	14.82	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$
 $= 8.18 \text{ dBi} > 6 \text{ dBi}$, So Band 1 Limit = $17 - (8.18 - 6) = 14.82 \text{ dBm}$

Configuration IEEE 802.11ac MCS2/Nss1 VHT80

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
42	5210 MHz	9.72	9.78	9.63	14.48	14.82	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$
 $= 8.18 \text{ dBi} > 6 \text{ dBi}$, So Band 1 Limit = $17 - (8.18 - 6) = 14.82 \text{ dBm}$

4.4. Power Spectral Density Measurement

4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15~5.25 GHz	4

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (C) Maximum conducted output power => (d) Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).
3. Multiple antenna systems was performed in accordance KDB 662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

4.4.4. Test Setup Layout

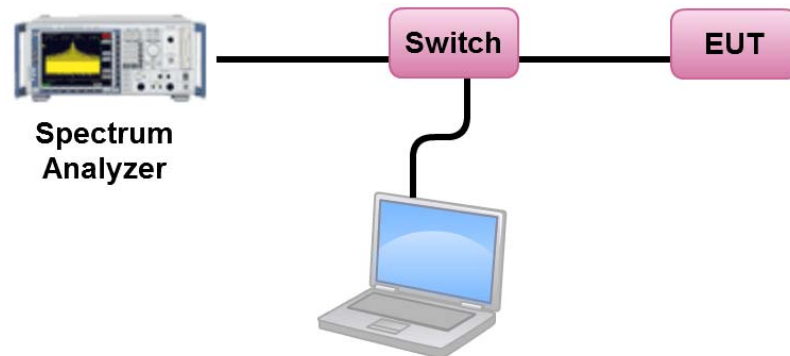

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

Temperature	20°C	Humidity	52%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac
Test Mode	Apr. 01, 2014		

<For Non-Beamforming Mode>

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	1.72	1.82	Complies
40	5200 MHz	0.93	1.82	Complies
48	5240 MHz	1.69	1.82	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$

= 8.18dBi > 6dBi, So Band 1 Limit = 4-(8.18-6)= 1.82dBm/MHz

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	-0.87	1.82	Complies
46	5230 MHz	-0.21	1.82	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$

= 8.18dBi > 6dBi, So Band 1 Limit = 4-(8.18-6)= 1.82dBm/MHz

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	-4.23	1.82	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$

= 8.18dBi > 6dBi, So Band 1 Limit = 4-(8.18-6)= 1.82dBm/MHz

Temperature	20°C	Humidity	52%
Test Engineer	Jim Huang	Configurations	IEEE 802.11a
Test Mode	Apr. 01, 2014		

Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	1.70	1.82	Complies
40	5200 MHz	1.12	1.82	Complies
48	5240 MHz	1.69	1.82	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{MAX}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$

= 8.18dBi > 6dBi, So Band1 Limit = 4-(8.18-6) = 1.82dBm/MHz

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

Temperature	20°C	Humidity	52%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac
Test Mode	Apr. 21, 2014		

<For Beamforming Mode>

Configuration IEEE 802.11ac MCS2/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	0.71	1.82	Complies
40	5200 MHz	0.83	1.82	Complies
48	5240 MHz	-2.22	1.82	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$

= 8.18dBi > 6dBi, So Band 1 Limit = 4-(8.18-6)=1.82dBm/MHz

Configuration IEEE 802.11ac MCS2/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	-1.88	1.82	Complies
46	5230 MHz	-0.91	1.82	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$

= 8.18dBi > 6dBi, So Band 1 Limit = 4-(8.18-6)=1.82dBm/MHz

Configuration IEEE 802.11ac MCS2/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	-5.01	1.82	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$


= 8.18dBi > 6dBi, So Band 1 Limit = 4-(8.18-6)=1.82dBm/MHz

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

<For Non-Beamforming Mode>


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5180 MHz

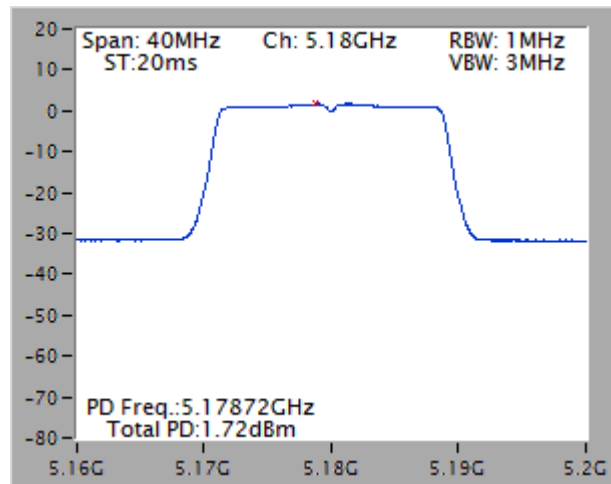


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5230 MHz

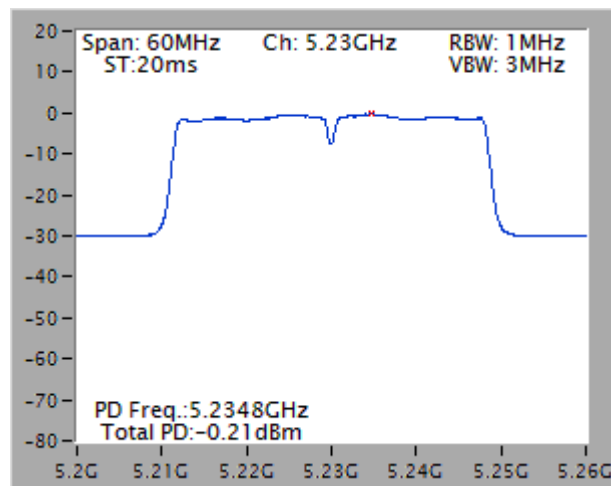

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5210 MHz

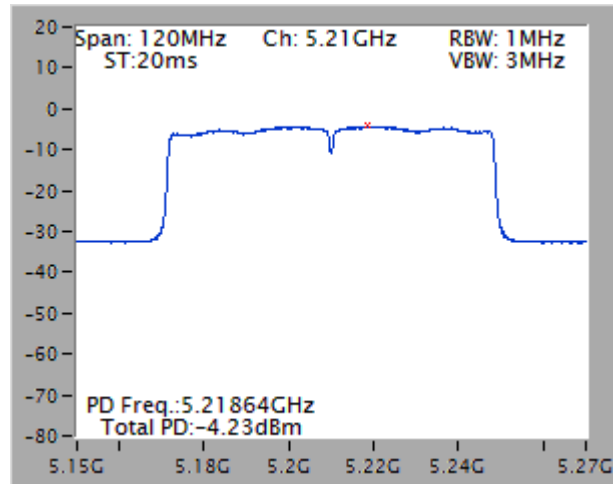


Power Density Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5180 MHz

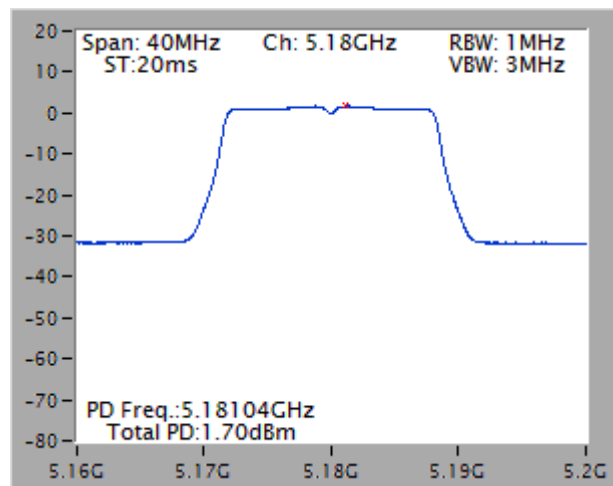


<For Beamforming Mode>


Power Density Plot on Configuration IEEE 802.11ac MCS2/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5200 MHz

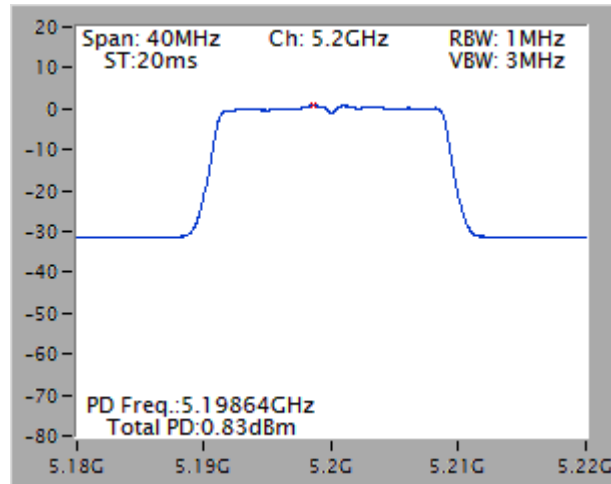

Power Density Plot on Configuration IEEE 802.11ac MCS2/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5230 MHz

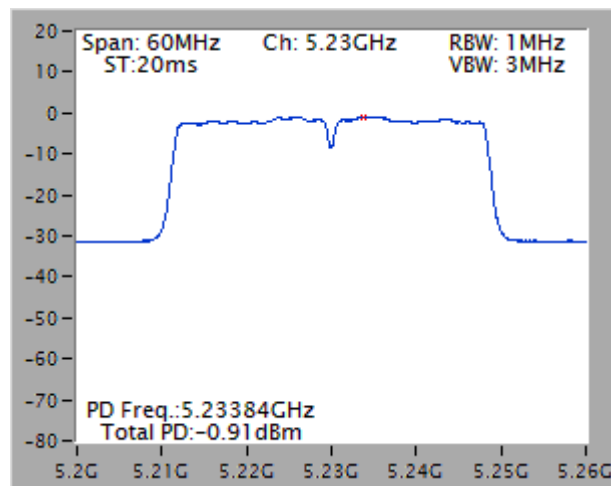

Power Density Plot on Configuration IEEE 802.11ac MCS2/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5210 MHz

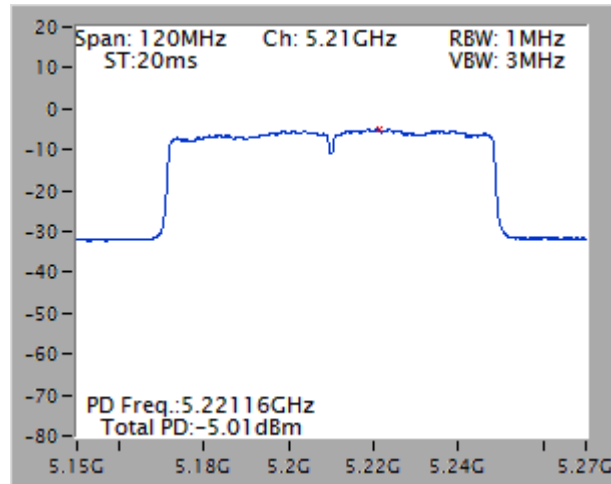

4.5. Peak Excursion Measurement

4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz (Peak Trace) / 1 MHz (Average Trace)
VBW	≥ 3 MHz (Peak Trace) / ≥ 3 MHz (Average Trace)
Detector	Peak (Peak Trace) / RMS (Average Trace)
Trace	Trace: Max hold (Peak Trace) / Trace Average Sweep Count 100 (Average Trace)
Sweep Time	AUTO

4.5.3. Test Procedures

1. Trace A, Set RBW = 1MHz, VBW = 3MHz, Span >26dB bandwidth, Max. hold.
2. Delta Mark trace A Maximum frequency and trace B same frequency.
3. Repeat the above procedure until measurements for all frequencies were complete.
4. Testing each modulation mode on a single channel in single operating band at single output port.
All signal types need test (DSSS, OFDM). All modulation types need test (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM). All bandwidth modes need test.

4.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.4.4.

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Peak Excursion

Temperature	20°C	Humidity	52%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac

<For Non-Beamforming Mode>

Configuration IEEE 802.11ac VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BSPK(MCS0)	5180MHz	8.57	13	Complies
QPSK(MCS1)	5180MHz	9.07	13	Complies
16QAM(MCS3)	5180MHz	8.85	13	Complies
64QAM(MCS5)	5180MHz	9.55	13	Complies
256QAM(MCS8)	5180MHz	9.84	13	Complies

Configuration IEEE 802.11ac VHT40 / Ant. 1 + Ant. 2 + Ant. 3

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BSPK(MCS0)	5190MHz	8.41	13	Complies
QPSK(MCS1)	5190MHz	8.50	13	Complies
16QAM(MCS3)	5190MHz	9.08	13	Complies
64QAM(MCS5)	5190MHz	9.68	13	Complies
256QAM(MCS8)	5190MHz	9.79	13	Complies

Configuration IEEE 802.11ac VHT80 / Ant. 1 + Ant. 2 + Ant. 3

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BSPK(MCS0)	5210MHz	9.07	13	Complies
QPSK(MCS1)	5210MHz	9.36	13	Complies
16QAM(MCS3)	5210MHz	10.54	13	Complies
64QAM(MCS5)	5210MHz	11.38	13	Complies
256QAM(MCS8)	5210MHz	10.39	13	Complies

Temperature	20°C	Humidity	52%
Test Engineer	Jim Huang	Configurations	IEEE 802.11a

Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3


Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BSPK(6Mbps)	5240MHz	8.37	13	Complies
QPSK(12Mbps)	5240MHz	8.82	13	Complies
16QAM(24Mbps)	5240MHz	8.92	13	Complies
64QAM(48Mbps)	5240MHz	9.05	13	Complies

Note: All the test values were listed in the report.

For plots, only the modulation with worse result was shown.


<For Non-Beamforming Mode>

Peak Excursion Plot on Configuration IEEE 802.11ac VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 256QAM(MCS8)/
5180 MHz

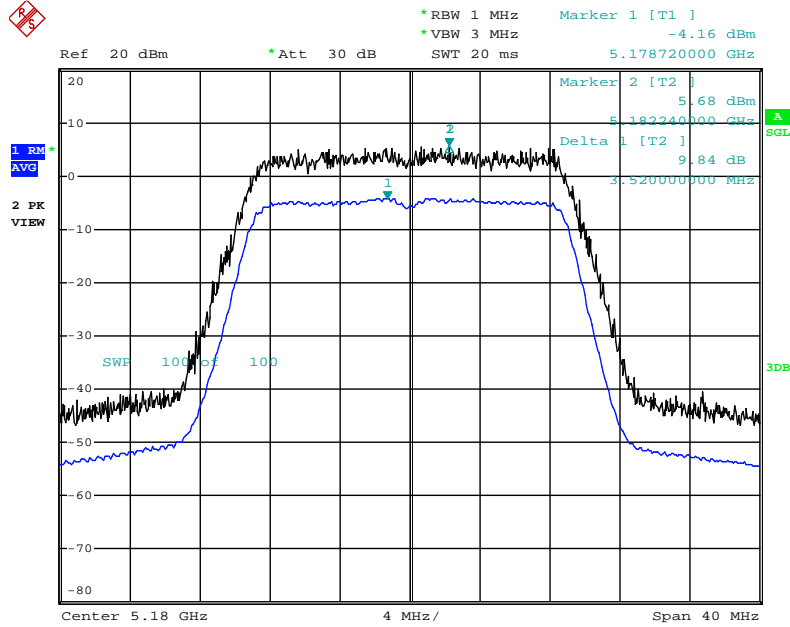


Date: 1. APR. 2014 23:47:11

Peak Excursion Plot on Configuration IEEE 802.11ac VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 256QAM(MCS8)/
5190 MHz

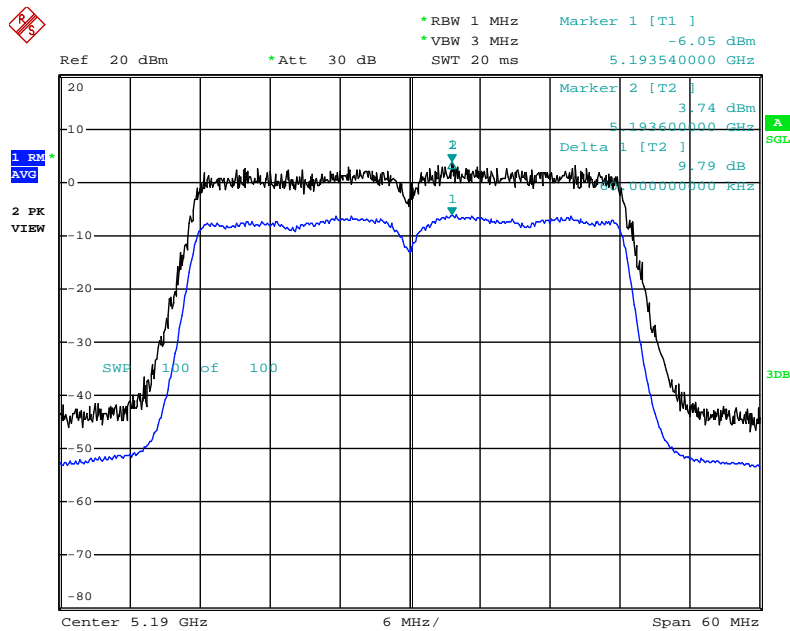


Date: 1. APR. 2014 23:48:42

Peak Excursion Plot on Configuration IEEE 802.11ac VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 64QAM(MCS5) / 5210 MHz

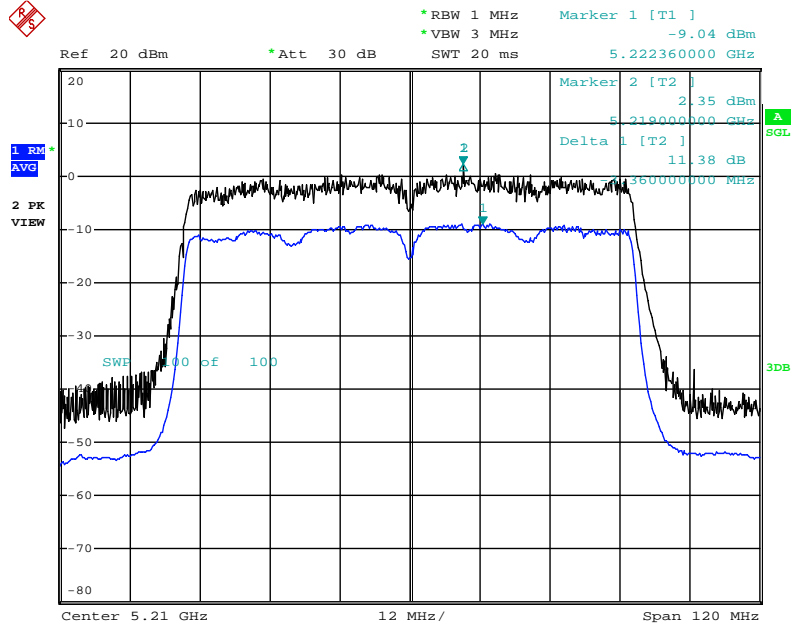

Date: 1.APR.2014 23:56:53

Peak Excursion Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 64QAM(48Mbps)/ 5240MHz

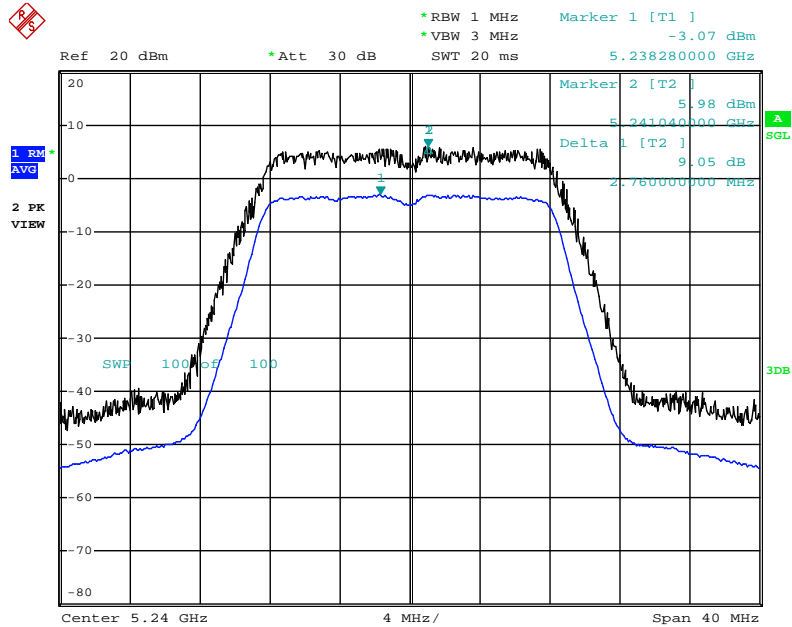

Date: 1.APR.2014 23:36:57

4.6. Radiated Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	1MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

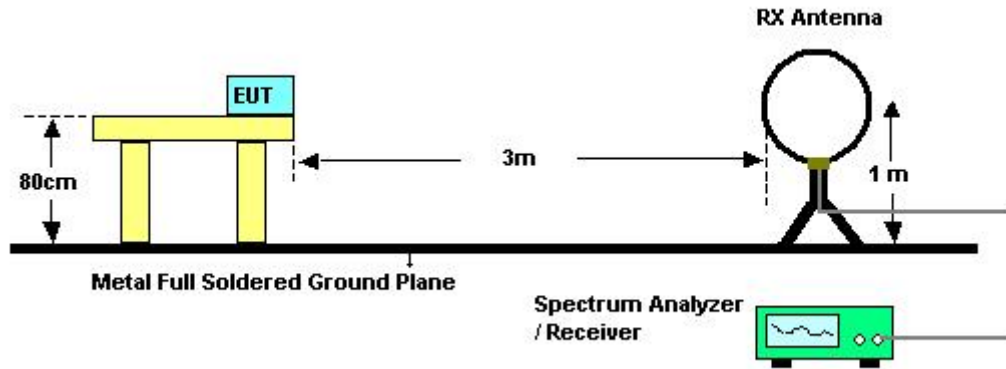

For Radiated Emissions: 30MHz~1GHz

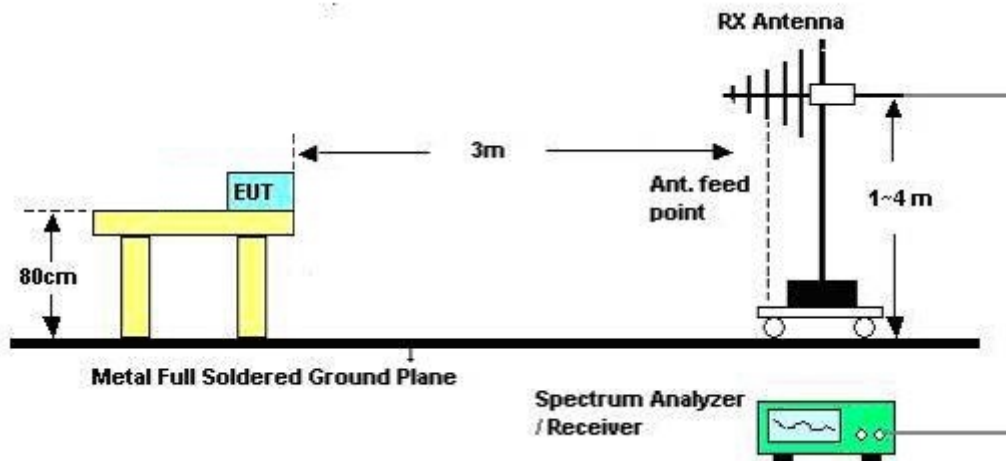

For Radiated Emissions: Above 1GHz

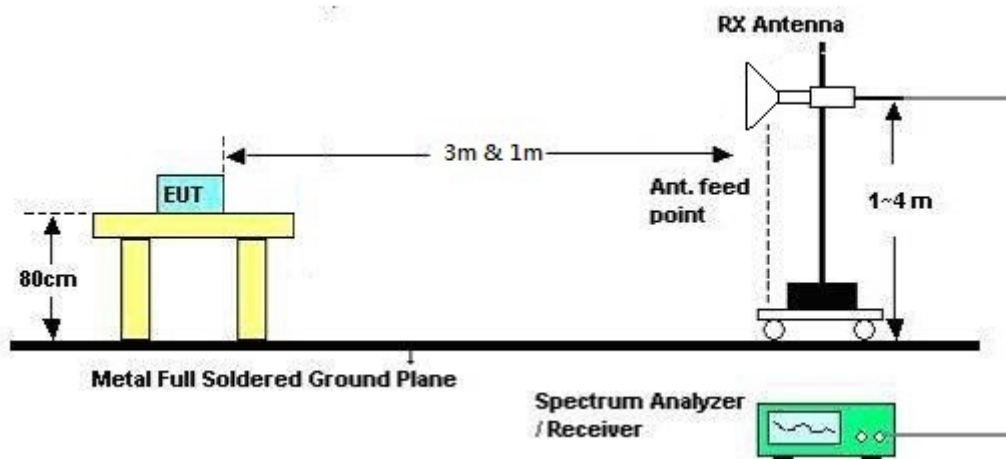

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

For non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24°C	Humidity	55%
Test Engineer	Serway Li	Configurations	Normal Link
Test Date	Mar. 11, 2014	Test Mode	Mode 2

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	24°C	Humidity	55%
Test Engineer	Serway Li	Configurations	Normal Link
Test Mode	Mode 2		

Horizontal

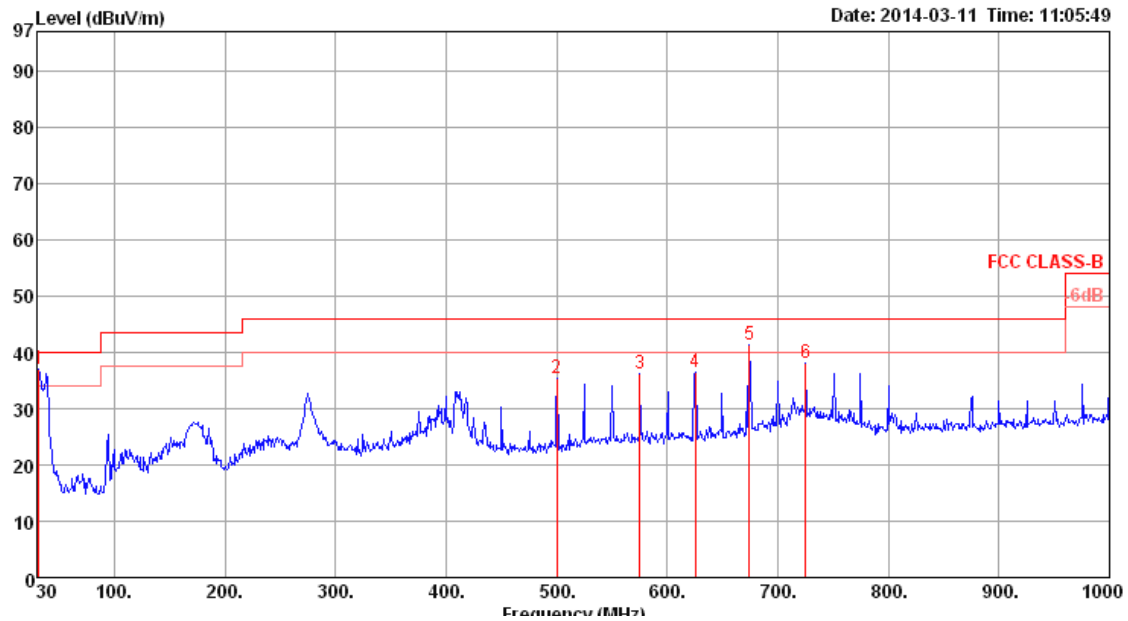

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	31.94	36.88	40.00	-3.12	46.34	0.65	17.69	27.80	Peak	400	0	HORIZONTAL
2	500.45	35.33	46.00	-10.67	43.13	2.67	17.63	28.10	Peak	400	0	HORIZONTAL
3	575.14	36.25	46.00	-9.75	43.07	2.80	18.48	28.10	Peak	400	0	HORIZONTAL
4	625.58	36.37	46.00	-9.63	42.69	2.90	18.85	28.07	Peak	400	0	HORIZONTAL
5	674.08	41.29	46.00	-4.71	47.27	3.04	19.01	28.03	Peak	400	0	HORIZONTAL
6	725.49	38.13	46.00	-7.87	43.62	3.15	19.26	27.90	Peak	400	0	HORIZONTAL

Vertical

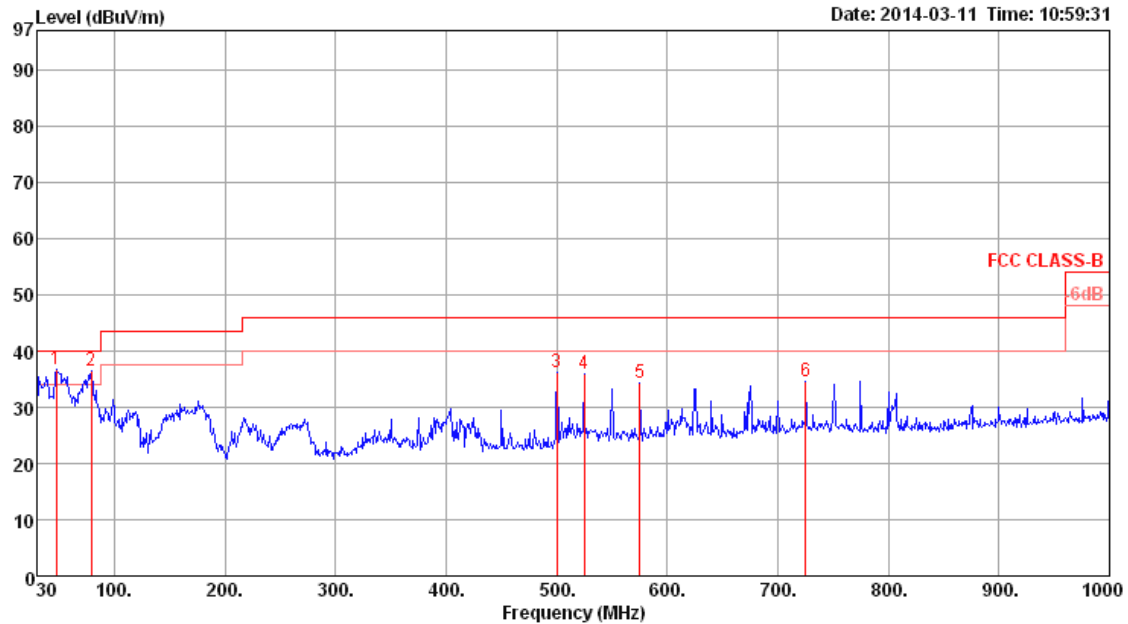

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	47.46	36.61	40.00	-3.39	54.19	0.80	9.42	27.80	Peak	400	0	VERTICAL
2	79.47	36.38	40.00	-3.62	55.98	0.96	7.12	27.68	Peak	400	0	VERTICAL
3	500.45	36.19	46.00	-9.81	43.99	2.67	17.63	28.10	Peak	400	0	VERTICAL
4	524.70	35.82	46.00	-10.18	43.29	2.72	17.91	28.10	Peak	400	0	VERTICAL
5	575.14	34.44	46.00	-11.56	41.26	2.80	18.48	28.10	Peak	400	0	VERTICAL
6	725.49	34.69	46.00	-11.31	40.18	3.15	19.26	27.90	Peak	400	0	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~40GHz)

<For Non-Beamforming Mode>

Temperature	24°C	Humidity	55%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Mar. 24, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15539.65	55.98	74.00	-18.02	42.68	10.77	38.12	35.59	Peak	100	218	HORIZONTAL
2	15540.05	43.33	54.00	-10.67	30.03	10.77	38.12	35.59	Average	100	218	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15539.61	56.31	74.00	-17.69	43.01	10.77	38.12	35.59	Peak	100	290	VERTICAL
2	15540.42	43.65	54.00	-10.35	30.35	10.77	38.12	35.59	Average	100	290	VERTICAL



Temperature	24°C	Humidity	55%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Mar. 24, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15600.10	55.76	74.00	-18.24	42.52	10.78	38.04	35.58	Peak	100	196	HORIZONTAL
2	15600.13	43.00	54.00	-11.00	29.76	10.78	38.04	35.58	Average	100	196	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15599.72	43.25	54.00	-10.75	30.01	10.78	38.04	35.58	Average	100	129	VERTICAL
2	15600.41	55.95	74.00	-18.05	42.71	10.78	38.04	35.58	Peak	100	129	VERTICAL

Temperature	24°C	Humidity	55%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Mar. 24, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15719.56	55.55	74.00	-18.45	42.47	10.79	37.85	35.56	Peak	100	288	HORIZONTAL
2	15720.13	42.86	54.00	-11.14	29.78	10.79	37.85	35.56	Average	100	288	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15719.66	56.77	74.00	-17.23	43.69	10.79	37.85	35.56	Peak	100	111	VERTICAL
2	15720.38	43.44	54.00	-10.56	30.36	10.79	37.85	35.56	Average	100	111	VERTICAL



Temperature	24°C	Humidity	55%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Mar. 24, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15569.78	56.31	74.00	-17.69	43.02	10.78	38.09	35.58	Peak	100	141	HORIZONTAL
2	15570.27	43.42	54.00	-10.58	30.13	10.78	38.09	35.58	Average	100	141	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15569.51	43.75	54.00	-10.25	30.46	10.78	38.09	35.58	Average	100	275	VERTICAL
2	15570.35	56.31	74.00	-17.69	43.02	10.78	38.09	35.58	Peak	100	275	VERTICAL

Temperature	24°C	Humidity	55%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Mar. 24, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15689.86	43.15	54.00	-10.85	30.01	10.79	37.91	35.56 Average	100	180	HORIZONTAL
2	15690.02	55.89	74.00	-18.11	42.75	10.79	37.91	35.56 Peak	100	180	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15689.71	55.97	74.00	-18.03	42.83	10.79	37.91	35.56 Peak	100	308	VERTICAL
2	15689.89	43.52	54.00	-10.48	30.38	10.79	37.91	35.56 Average	100	308	VERTICAL



Temperature	24°C	Humidity	55%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Mar. 24, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15629.70	56.10	74.00	-17.90	42.90	10.78	37.99	35.57	Peak	100	103	HORIZONTAL
2	15630.08	43.64	54.00	-10.36	30.44	10.78	37.99	35.57	Average	100	103	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15630.11	43.90	54.00	-10.10	30.70	10.78	37.99	35.57	Average	100	214	VERTICAL
2	15630.30	56.44	74.00	-17.56	43.24	10.78	37.99	35.57	Peak	100	214	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Temperature	24°C	Humidity	55%
Test Engineer	Serway Li	Configurations	IEEE 802.11a CH 36 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Mar. 24, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15539.76	56.25	74.00	-17.75	42.95	10.77	38.12	35.59	Peak	100	158	HORIZONTAL
2	15539.96	43.13	54.00	-10.87	29.83	10.77	38.12	35.59	Average	100	158	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15539.55	43.31	54.00	-10.69	30.01	10.77	38.12	35.59	Average	100	56	VERTICAL
2	15539.71	55.84	74.00	-18.16	42.54	10.77	38.12	35.59	Peak	100	56	VERTICAL

Temperature	24°C	Humidity	55%
Test Engineer	Serway Li	Configurations	IEEE 802.11a CH 40 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Mar. 24, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15599.69	55.35	74.00	-18.65	42.11	10.78	38.04	35.58	Peak	100	250	HORIZONTAL
2	15600.31	43.16	54.00	-10.84	29.92	10.78	38.04	35.58	Average	100	250	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15600.70	43.82	54.00	-10.18	30.58	10.78	38.04	35.58	Average	100	104	VERTICAL
2	15601.10	55.37	74.00	-18.63	42.13	10.78	38.04	35.58	Peak	100	104	VERTICAL

Temperature	24°C	Humidity	55%
Test Engineer	Serway Li	Configurations	IEEE 802.11a CH 48 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Mar. 24, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15719.72	55.39	74.00	-18.61	42.31	10.79	37.85	35.56	Peak	100	260	HORIZONTAL
2	15720.01	43.06	54.00	-10.94	29.98	10.79	37.85	35.56	Average	100	260	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15719.98	56.82	74.00	-17.18	43.74	10.79	37.85	35.56	Peak	100	150	VERTICAL
2	15720.25	43.94	54.00	-10.06	30.86	10.79	37.85	35.56	Average	100	150	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



<For Beamforming Mode>

Temperature	24°C	Humidity	55%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac MCS2/Nss1VHT20 CH 36 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 10, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15536.99	40.29	54.00	-13.71	30.88	6.13	38.45	35.17	Average	100	104	HORIZONTAL
2	15538.16	52.54	74.00	-21.46	43.13	6.13	38.45	35.17	Peak	100	104	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15536.99	52.88	74.00	-21.12	43.47	6.13	38.45	35.17	Peak	100	260	VERTICAL
2	15540.13	40.68	54.00	-13.32	31.27	6.13	38.45	35.17	Average	100	260	VERTICAL



Temperature	24°C	Humidity	55%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac MCS2/Nss1 VHT20 CH 40 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 10, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15595.58	40.02	54.00	-13.98	30.71	6.13	38.36	35.18	Average	100	43	HORIZONTAL
2	15602.05	53.64	74.00	-20.36	44.34	6.13	38.36	35.19	Peak	100	43	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15595.58	52.75	74.00	-21.25	43.44	6.13	38.36	35.18	Peak	100	155	VERTICAL
2	15600.80	41.15	54.00	-12.85	31.85	6.13	38.36	35.19	Average	100	155	VERTICAL



Temperature	24°C	Humidity	55%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac MCS2/Nss1 VHT20 CH 48 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 10, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15719.73	53.35	74.00	-20.65	44.23	6.14	38.19	35.21	Peak	100	187	HORIZONTAL
2	15719.86	40.49	54.00	-13.51	31.37	6.14	38.19	35.21	Average	100	187	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15718.09	53.98	74.00	-20.02	44.86	6.14	38.19	35.21	Peak	100	68	VERTICAL
2	15718.96	40.47	54.00	-13.53	31.35	6.14	38.19	35.21	Average	100	68	VERTICAL



Temperature	24°C	Humidity	55%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac MCS2/Nss1 VHT40 CH 38 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 10, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15567.24	40.54	54.00	-13.46	31.18	6.13	38.40	35.17	Average	100	242	HORIZONTAL
2	15568.70	52.99	74.00	-21.01	43.63	6.13	38.40	35.17	Peak	100	242	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15568.57	53.07	74.00	-20.93	43.71	6.13	38.40	35.17	Peak	100	304	VERTICAL
2	15569.92	40.83	54.00	-13.17	31.47	6.13	38.40	35.17	Average	100	304	VERTICAL



Temperature	24°C	Humidity	55%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac MCS2/Nss1 VHT40 CH 46 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 10, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15690.29	52.68	74.00	-21.32	43.52	6.14	38.23	35.21	Peak	100	164	HORIZONTAL
2	15691.96	40.42	54.00	-13.58	31.26	6.14	38.23	35.21	Average	100	164	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15689.60	52.59	74.00	-21.41	43.43	6.14	38.23	35.21	Peak	100	195	VERTICAL
2	15694.36	40.48	54.00	-13.52	31.32	6.14	38.23	35.21	Average	100	195	VERTICAL



Temperature	24°C	Humidity	55%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac MCS2/Nss1 VHT80 CH 42 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 10, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15626.25	53.14	74.00	-20.86	43.86	6.14	38.33	35.19	Peak	100	83	HORIZONTAL
2	15628.22	40.38	54.00	-13.62	31.10	6.14	38.33	35.19	Average	100	83	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15621.09	52.93	74.00	-21.07	43.66	6.13	38.33	35.19	Peak	100	117	VERTICAL
2	15629.65	40.66	54.00	-13.34	31.40	6.14	38.31	35.19	Average	100	117	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7. Band Edge Emissions Measurement

4.7.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. In addition, in case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

4.7.3. Test Procedures

- The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

For non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

<For Non-Beamforming Mode>

Temperature	24°C	Humidity	55%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36, 40, 48 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Mar. 24, 2014		

Channel 36

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5101.00	52.98	54.00	-1.02	12.97	6.10	33.91	0.00 Average	114	197	VERTICAL
2	5101.00	63.03	74.00	-10.97	23.02	6.10	33.91	0.00 Peak	114	197	VERTICAL
3	5181.00	101.48			61.25	6.15	34.08	0.00 Average	114	197	VERTICAL
4	5181.00	111.54			71.31	6.15	34.08	0.00 Peak	114	197	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5125.00	50.16	54.00	-3.84	10.10	6.12	33.94	0.00 Average	109	346	VERTICAL
2	5125.00	60.26	74.00	-13.74	20.20	6.12	33.94	0.00 Peak	109	346	VERTICAL
3	5205.00	100.43			60.16	6.16	34.11	0.00 Average	109	346	VERTICAL
4	5205.00	111.26			70.99	6.16	34.11	0.00 Peak	109	346	VERTICAL
5	5359.00	52.98	54.00	-1.02	12.30	6.26	34.42	0.00 Average	109	346	VERTICAL
6	5359.00	63.47	74.00	-10.53	22.79	6.26	34.42	0.00 Peak	109	346	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5079.00	47.62	54.00	-6.38	7.66	6.09	33.87	0.00 Average	101	198	VERTICAL
2	5083.00	57.86	74.00	-16.14	17.90	6.09	33.87	0.00 Peak	101	198	VERTICAL
3	5236.00	110.27			69.91	6.18	34.18	0.00 Peak	101	198	VERTICAL
4	5241.00	101.39			61.03	6.18	34.18	0.00 Average	101	198	VERTICAL
5	5397.00	62.20	74.00	-11.80	21.42	6.29	34.49	0.00 Peak	101	198	VERTICAL
6	5402.00	52.97	54.00	-1.03	12.15	6.29	34.53	0.00 Average	101	198	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	24°C	Humidity	55%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38, 46 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Mar. 24, 2014		

Channel 38

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5150.00	51.28	54.00	-2.72	11.14	6.13	34.01	0.00 Average	109	342	VERTICAL
2	5150.00	62.07	74.00	-11.93	21.93	6.13	34.01	0.00 Peak	109	342	VERTICAL
3	5194.00	100.41			60.17	6.16	34.08	0.00 Average	109	342	VERTICAL
4	5194.00	108.84			68.60	6.16	34.08	0.00 Peak	109	342	VERTICAL
5	5352.00	62.55	74.00	-11.45	21.87	6.26	34.42	0.00 Peak	109	342	VERTICAL
6	5355.00	52.85	54.00	-1.15	12.17	6.26	34.42	0.00 Average	109	342	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5140.00	58.85	74.00	-15.15	18.74	6.13	33.98	0.00 Peak	110	198	VERTICAL
2	5146.00	48.58	54.00	-5.42	8.44	6.13	34.01	0.00 Average	110	198	VERTICAL
3	5226.00	97.13			56.80	6.18	34.15	0.00 Average	110	198	VERTICAL
4	5226.00	108.78			68.45	6.18	34.15	0.00 Peak	110	198	VERTICAL
5	5382.00	63.28	74.00	-10.72	22.51	6.28	34.49	0.00 Peak	110	198	VERTICAL
6	5397.00	52.95	54.00	-1.05	12.17	6.29	34.49	0.00 Average	110	198	VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.



Temperature	24°C	Humidity	55%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Mar. 24, 2014		

Channel 42

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5147.00	67.72	74.00	-6.28	27.58	6.13	34.01	0.00	Peak	109	358	VERTICAL
2	5148.00	52.73	54.00	-1.27	12.59	6.13	34.01	0.00	Average	109	358	VERTICAL
3	5203.00	94.10			53.83	6.16	34.11	0.00	Average	109	358	VERTICAL
4	5223.00	107.04			66.72	6.17	34.15	0.00	Peak	109	358	VERTICAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	24°C	Humidity	55%
Test Engineer	Serway Li	Configurations	IEEE 802.11a CH 36, 40, 48 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Mar. 24, 2014		

Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5102.00	52.96	54.00	-1.04	12.95	6.10	33.91	0.00	Average	100	193	VERTICAL
2	5102.00	63.48	74.00	-10.52	23.47	6.10	33.91	0.00	Peak	100	193	VERTICAL
3	5182.00	111.83	74.00			6.15	34.08	0.00	Peak	100	193	VERTICAL
4	5187.00	101.53	54.00			6.15	34.08	0.00	Average	100	193	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5117.00	61.71	74.00	-12.29	21.66	6.11	33.94	0.00	Peak	112	194	VERTICAL
2	5122.00	50.88	54.00	-3.12	10.83	6.11	33.94	0.00	Average	112	194	VERTICAL
3	5202.00	100.81			60.54	6.16	34.11	0.00	Average	112	194	VERTICAL
4	5202.00	111.17			70.90	6.16	34.11	0.00	Peak	112	194	VERTICAL
5	5357.00	52.93	54.00	-1.07	12.25	6.26	34.42	0.00	Average	112	194	VERTICAL
6	5358.00	63.21	74.00	-10.79	22.53	6.26	34.42	0.00	Peak	112	194	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5078.00	58.84	74.00	-15.16	18.88	6.09	33.87	0.00	Peak	100	199	VERTICAL
2	5079.00	47.64	54.00	-6.36	7.68	6.09	33.87	0.00	Average	100	199	VERTICAL
3	5241.00	100.81			60.45	6.18	34.18	0.00	Average	100	199	VERTICAL
4	5241.00	110.62			70.26	6.18	34.18	0.00	Peak	100	199	VERTICAL
5	5401.00	52.93	54.00	-1.07	12.11	6.29	34.53	0.00	Average	100	199	VERTICAL
6	5402.00	62.56	74.00	-11.44	21.74	6.29	34.53	0.00	Peak	100	199	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

<For Beamforming Mode>

Temperature	24°C	Humidity	55%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac MCS2/Nss1 VHT20 CH 36, 40, 48 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Apr. 10, 2014		

Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5106.41	64.19	74.00	-9.81	26.71	3.42	34.06	0.00	Peak	102	210	VERTICAL
2	5107.37	52.77	54.00	-1.23	15.29	3.42	34.06	0.00	Average	102	210	VERTICAL
3	5184.81	115.29			77.69	3.44	34.16	0.00	Peak	102	210	VERTICAL
4	5187.05	103.57			65.97	3.44	34.16	0.00	Average	102	210	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5119.55	60.38	74.00	-13.62	22.89	3.43	34.06	0.00	Peak	113	29	VERTICAL
2	5120.35	50.14	54.00	-3.86	12.65	3.43	34.06	0.00	Average	113	29	VERTICAL
3	5201.60	103.07			65.44	3.45	34.18	0.00	Average	113	29	VERTICAL
4	5201.60	113.15			75.52	3.45	34.18	0.00	Peak	113	29	VERTICAL
5	5352.40	52.71	54.00	-1.29	14.83	3.49	34.39	0.00	Average	113	29	VERTICAL
6	5354.81	62.53	74.00	-11.47	24.65	3.49	34.39	0.00	Peak	113	29	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4999.36	45.82	54.00	-8.18	8.53	3.39	33.90	0.00	Average	101	327	VERTICAL
2	4999.36	52.22	74.00	-21.78	14.93	3.39	33.90	0.00	Peak	101	327	VERTICAL
3	5239.20	110.14			72.45	3.46	34.23	0.00	Peak	101	327	VERTICAL
4	5241.60	99.10			61.39	3.46	34.25	0.00	Average	101	327	VERTICAL
5	5398.88	64.62	74.00	-9.38	26.65	3.51	34.46	0.00	Peak	101	327	VERTICAL
6	5406.89	52.55	54.00	-1.45	14.58	3.51	34.46	0.00	Average	101	327	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	24°C	Humidity	55%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac MCS2/Nss1 VHT40 CH 38, 46 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Mar. 24, 2014		

Channel 38

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5145.99	67.59	74.00	-6.41	30.05	3.43	34.11	0.00 Peak	104	199	VERTICAL
2	5150.00	52.33	54.00	-1.67	14.79	3.43	34.11	0.00 Average	104	199	VERTICAL
3	5185.19	100.55			62.95	3.44	34.16	0.00 Average	104	199	VERTICAL
4	5185.99	112.17			74.57	3.44	34.16	0.00 Peak	104	199	VERTICAL
5	5351.60	49.18	54.00	-4.82	11.30	3.49	34.39	0.00 Average	104	199	VERTICAL
6	5351.60	59.01	74.00	-14.99	21.13	3.49	34.39	0.00 Peak	104	199	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5143.59	59.82	74.00	-14.18	22.28	3.43	34.11	0.00 Peak	112	202	VERTICAL
2	5147.60	49.94	54.00	-4.06	12.40	3.43	34.11	0.00 Average	112	202	VERTICAL
3	5231.60	103.48			65.79	3.46	34.23	0.00 Average	112	202	VERTICAL
4	5233.21	114.94			77.25	3.46	34.23	0.00 Peak	112	202	VERTICAL
5	5394.87	52.61	54.00	-1.39	14.65	3.50	34.46	0.00 Average	112	202	VERTICAL
6	5394.87	63.08	74.00	-10.92	25.12	3.50	34.46	0.00 Peak	112	202	VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.



Temperature	24°C	Humidity	55%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac MCS2/Nss1 VHT80 CH 42 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Mar. 24, 2014		

Channel 42

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5149.20	66.42	74.00	-7.58	28.88	3.43	34.11	0.00	Peak	114	181	VERTICAL
2	5150.00	52.83	54.00	-1.17	15.29	3.43	34.11	0.00	Average	114	181	VERTICAL
3	5197.98	107.73			70.10	3.45	34.18	0.00	Peak	114	181	VERTICAL
4	5198.78	97.33			59.70	3.45	34.18	0.00	Average	114	181	VERTICAL
5	5374.04	60.54	74.00	-13.46	22.63	3.50	34.41	0.00	Peak	114	181	VERTICAL
6	5374.84	49.55	54.00	-4.45	11.64	3.50	34.41	0.00	Average	114	181	VERTICAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.8. Frequency Stability Measurement

4.8.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f) / f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $0^\circ\text{C} \sim 40^\circ\text{C}$.

4.8.4. Test Setup Layout

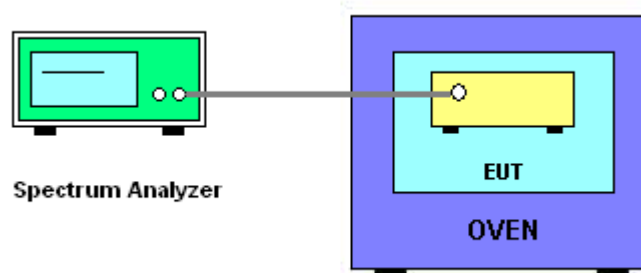

4.8.5. Test Deviation

There is no deviation with the original standard.

4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.8.7. Test Result of Frequency Stability

Temperature	20°C	Humidity	52%
Test Engineer	Jim Huang	Test Mode	Apr. 01, 2014

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5200 MHz
126.50	5200.0041
110.00	5200.0023
93.50	5200.0019
Max. Deviation (MHz)	0.004100
Max. Deviation (ppm)	0.79

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5200 MHz
0	5200.0252
10	5200.0114
20	5200.0030
30	5199.9712
40	5199.9601
Max. Deviation (MHz)	0.039900
Max. Deviation (ppm)	7.67

4.9. Antenna Requirements

4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9 kHz ~ 2.75 GHz	Apr. 12, 2013	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150 kHz ~ 100 MHz	Nov. 23, 2013	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Nov. 23, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150 kHz ~ 30 MHz	Dec. 04, 2013	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Apr. 16, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 01, 2013	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Dec. 17, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 12, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Oct. 23, 2013	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100019	9kHz~40GHz	Dec. 02, 2013	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Nov. 29, 2013	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 04, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz ~ 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

NCR means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	0.026	dB	normal(k=2)	0.013
Cable loss	0.002	dB	normal(k=2)	0.001
AMN/LISN specification	1.200	dB	normal(k=2)	0.600
Mismatch Receiver VSWR 1= AMN/LISN VSWR 2=	-0.080	dB	U-shaped	0.060
Combined standard uncertainty $U_c(y)$				1.2
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				2.4

Uncertainty of Radiated Emission Measurement (30MHz ~ 1,000MHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	± 0.173	dB	K=1	0.086
Cable loss	± 0.174	dB	K=2	0.087
Antenna gain	± 0.169	dB	K=2	0.084
Site imperfection	± 0.433	dB	Triangular	0.214
Pre-amplifier gain	± 0.366	dB	K=2	0.183
Transmitter antenna	± 1.200	dB	Rectangular	0.600
Signal generator	± 0.461	dB	Rectangular	0.231
Mismatch	± 0.080	dB	U-shape	0.040
Spectrum analyzer	± 0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.778
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.555

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	±0.191	dB	K=1	0.095
Cable loss	±0.169	dB	K=2	0.084
Antenna gain	±0.191	dB	K=2	0.096
Site imperfection	±0.582	dB	Triangular	0.291
Pre-amplifier gain	±0.304	dB	K=2	0.152
Transmitter antenna	±1.200	dB	Rectangular	0.600
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.839
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.678

Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	±0.186	dB	K=1	0.093
Cable loss	±0.167	dB	K=2	0.083
Antenna gain	±0.190	dB	K=2	0.095
Site imperfection	±0.488	dB	Triangular	0.244
Pre-amplifier gain	±0.269	dB	K=2	0.134
Transmitter antenna	±1.200	dB	Rectangular	0.600
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.771
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.541

Uncertainty of Conducted Emission Measurement

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Cable loss	±0.038	dB	K=2	0.019
Attenuator	±0.047	dB	K=2	0.024
Power Meter specification	±0.300	dB	Triangular	0.150
Power Sensor specification	±0.300	dB	Rectangular	0.150
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				0.863
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				1.726