


Appendix C. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	24°C	Humidity	55%
Test Engineer	Serway Li	Configurations	2.4G + 5G

Horizontal

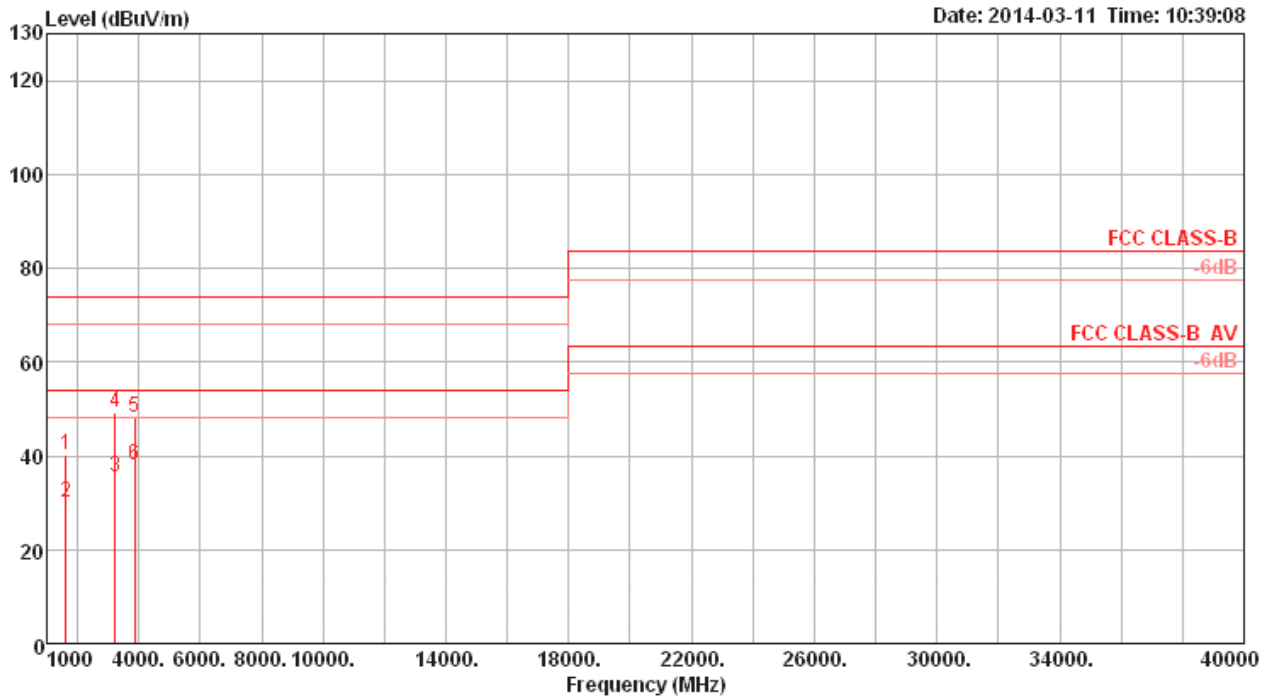

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	1624.80	40.26	74.00	-33.74	45.87	3.33	25.96	34.90	Peak	109	124	HORIZONTAL
2	1625.01	29.89	54.00	-24.11	35.50	3.33	25.96	34.90	Average	109	124	HORIZONTAL
3	3215.34	35.61	54.00	-18.39	35.66	4.84	30.31	35.20	Average	45	194	HORIZONTAL
4	3217.40	49.26	74.00	-24.74	49.31	4.84	30.31	35.20	Peak	100	194	HORIZONTAL
5	3849.74	48.25	74.00	-25.75	45.93	5.32	32.20	35.20	Peak	100	284	HORIZONTAL
6	3849.96	37.90	54.00	-16.10	35.58	5.32	32.20	35.20	Average	100	284	HORIZONTAL

Vertical

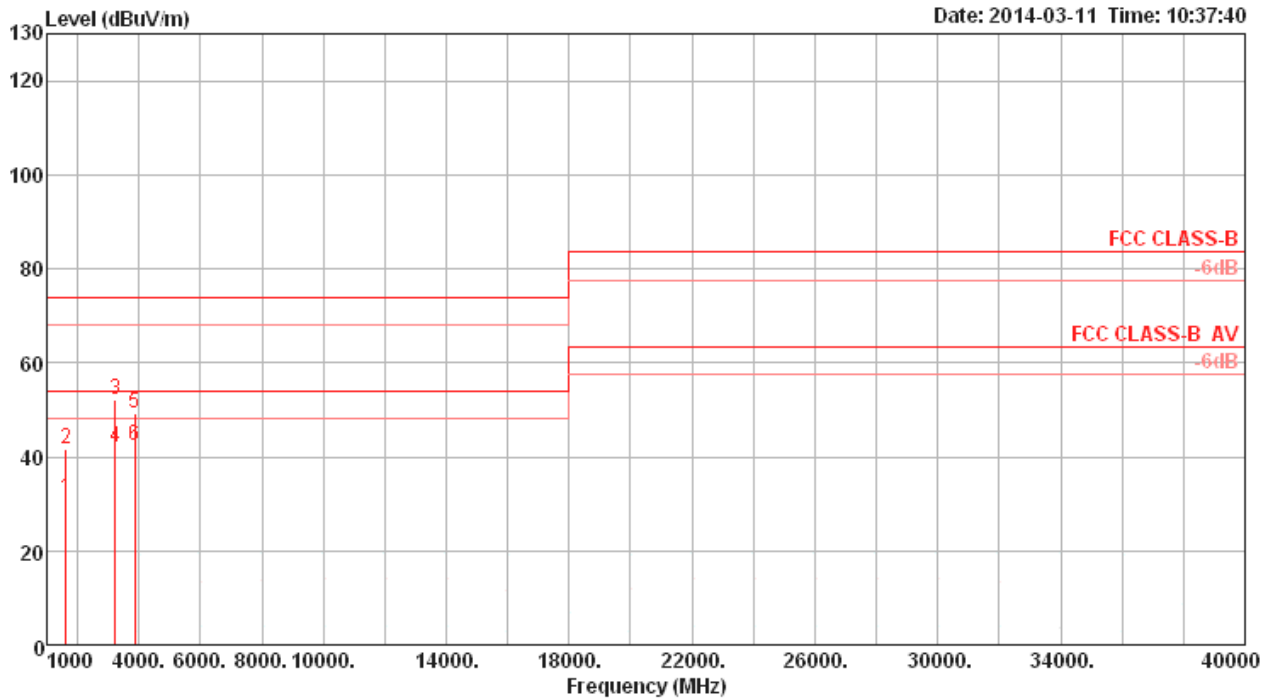

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1625.01	31.09	54.00	-22.91	36.70	3.33	25.96	34.90	Average	101	317 VERTICAL
2	1625.53	41.77	74.00	-32.23	47.38	3.33	25.96	34.90	Peak	101	317 VERTICAL
3	3215.67	52.03	74.00	-21.97	52.08	4.84	30.31	35.20	Peak	113	272 VERTICAL
4	3215.90	41.91	54.00	-12.09	41.96	4.84	30.31	35.20	Average	113	272 VERTICAL
5	3849.80	49.24	74.00	-24.76	46.92	5.32	32.20	35.20	Peak	120	18 VERTICAL
6	3850.02	42.26	54.00	-11.74	39.94	5.32	32.20	35.20	Average	120	18 VERTICAL