

FCC Test Report

Report No.: RF160422D13

FCC ID: Q87-LAPAC2600

Test Model: LAPAC2600

Received Date: Apr. 22, 2016

Test Date: May 4 ~ 16, 2016

Issued Date: May 27, 2016

Applicant: Linksys LLC

Address: 121 Theory Drive, Irvine, CA 92617, USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record.....	6
3 General Information	7
3.1 General Description of EUT.....	7
3.2 Description of Test Modes	9
3.2.1 Test Mode Applicability and Tested Channel Detail.....	10
3.3 Duty Cycle of Test Signal.....	12
3.4 Description of Support Units.....	13
3.4.1 Configuration of System under Test	13
3.5 General Description of Applied Standards.....	14
4 Test Types and Results	15
4.1 Radiated Emission and Bandedge Measurement.....	15
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	15
4.1.2 Test Instruments.....	16
4.1.3 Test Procedures	17
4.1.4 Deviation from Test Standard.....	17
4.1.5 Test Set Up.....	18
4.1.6 EUT Operating Conditions.....	18
4.1.7 Test Results.....	19
4.2 Conducted Emission Measurement	38
4.2.1 Limits of Conducted Emission Measurement.....	38
4.2.2 Test Instruments.....	38
4.2.3 Test Procedures	39
4.2.4 Deviation from Test Standard.....	39
4.2.5 Test Setup	39
4.2.6 EUT Operating Conditions.....	39
4.2.7 Test Results.....	40
4.3 6dB Bandwidth Measurement.....	42
4.3.1 Limits of 6dB Bandwidth Measurement.....	42
4.3.2 Test Setup	42
4.3.3 Test Instruments.....	42
4.3.4 Test Procedure	42
4.3.5 Deviation from Test Standard.....	42
4.3.6 EUT Operating Conditions.....	42
4.3.7 Test Result	43
4.4 Conducted Output Power Measurement.....	45
4.4.1 Limits of Conducted Output Power Measurement	45
4.4.2 Test Setup	45
4.4.3 Test Instruments.....	45
4.4.4 Test Procedures	45
4.4.5 Deviation from Test Standard.....	45
4.4.6 EUT Operating Conditions.....	45
4.4.7 Test Results.....	46
4.5 Power Spectral Density Measurement.....	48
4.5.1 Limits of Power Spectral Density Measurement	48
4.5.2 Test Setup	48
4.5.3 Test Instruments.....	48
4.5.4 Test Procedure	48
4.5.5 Deviation from Test Standard.....	48
4.5.6 EUT Operating Condition.....	48

4.5.7 Test Results.....	49
4.6 Conducted Out of Band Emission Measurement.....	52
4.6.1 Limits of Conducted Out of Band Emission Measurement.....	52
4.6.2 Test Setup.....	52
4.6.3 Test Instruments.....	52
4.6.4 Test Procedure.....	52
4.6.5 Deviation from Test Standard.....	52
4.6.6 EUT Operating Condition.....	52
4.6.7 Test Results.....	52
5 Pictures of Test Arrangements.....	69
Appendix – Information on the Testing Laboratories.....	70

Release Control Record

Issue No.	Description	Date Issued
RF160422D13	Original release.	May 27, 2016

1 Certificate of Conformity

Product: LAPAC2600 Dual Band Access Point

Brand: Linksys

Test Model: LAPAC2600

Sample Status: Engineering sample


Applicant: Linksys LLC

Test Date: May 4 ~ 16, 2016

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :



(Celia Chen / Supervisor)

, **Date:** May 27, 2016

Approved by :



(Rex Lai / Assistant Manager)

, **Date:** May 27, 2016

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -11.36dB at 0.33750MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -1.0dB at 2390.00MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is I-PEX not a standard connector.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.78 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1000MHz	4.00 dB
Radiated Emissions above 1 GHz	1GHz ~ 40GHz	3.36 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	LAPAC2600 Dual Band Access Point
Brand	Linksys
Test Model	LAPAC2600
Status of EUT	Engineering sample
Power Supply Rating	12Vdc from adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 600Mbps
Operating Frequency	2412 ~ 2462MHz
Number of Channel	11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz)
Output Power	977.239mW
Antenna Type	CDD Mode: PIFA antenna with 2.08dBi gain Beamforming Mode: PIFA antenna with 7.5dBi gain
Antenna Connector	I-PEX
Accessory Device	Adapter
Data Cable Supplied	N/A
Driver Version	V1.0.00.003

Note:

1. The EUT provides 4 completed transmitters and 4 receivers.

Modulation Mode	TX Function	
	2.4GHz (Non-Beamforming)	2.4GHz (Beamforming)
802.11b	4TX	-
802.11g	4TX	-
802.11n (20MHz)	4TX	4TX
802.11n (40MHz)	4TX	4TX

2. The EUT was power supplied from the following power adapters (accessory device) and PoE (support unit):

Item	Brand	Model No.	Plug Type	Rating
Adapter 1	LEI	MU30-P120250-A1	US	AC I/P: 100-240V, 0.8A, 50/60Hz DC O/P: 12V, 2.5A
Adapter 2		MU30-P120250-A3	AU	
Two adapters are identical with each other except for their plug type difference				
Adapter 3	APD	WA-30J12FU	US	AC I/P: 100-240V, 0.9A, 50-60Hz DC O/P: 12V, 2.5A
Adapter 4		WA-30J12FN	AU	
Two adapters are identical with each other except for their plug type difference				
Adapter 5	APD	WA-30J12R	US	AC I/P: 100-240V, 0.9A, 50-60Hz DC O/P: 12V, 2.5A
Adapter 6			EU	
Adapter 7			UK	
Three adapters are identical with each other except for their plug type difference				
Adapter 8	Ktec	KSAS0361200250D5	US	AC I/P: 100-240V, 1.0A, 50/60Hz DC O/P: 12V, 2.5A
Adapter 9			EU	
Adapter 10			UK	
Three adapters are identical with each other except for their plug type difference				
Support unit provided by client				
PoE	Microsemi	PD-9601G/AC		AC I/P: 100-240V, 1.35A, 50-60Hz DC O/P: 55V, 1.75A

After pre-tested above adapters and PoE, **adapter 1** was selected as a representative one and therefore only its test data was recorded in this report.

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (20MHz):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (40MHz):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE $<$ 1G	PLC	APCM	
-	√	√	√	√	-

Where **RE \geq 1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE $<$ 1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on **X-plane**.

Radiated Emission Test (Above 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
-	802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13.5
Beamforming Mode						
EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
-	802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Radiated Emission Test (Below 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11n (20MHz)	1 to 11	1	OFDM	BPSK	6.5

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11n (20MHz)	1 to 11	1	OFDM	BPSK	6.5

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
-	802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE \geq 1G	18deg. C, 73%RH	120Vac, 60Hz	Aaron You
RE $<$ 1G	18deg. C, 73%RH	120Vac, 60Hz	Aaron You
PLC	23deg. C, 72%RH	120Vac, 60Hz	Aaron You
APCM	25deg. C, 60%RH	120Vac, 60Hz	Dalen Dai

3.3 Duty Cycle of Test Signal


If duty cycle of test signal is $\geq 98\%$, duty factor is not required.
 If duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11b: Duty cycle of test signal is 100 %

802.11g: Duty cycle = $2.043/2.144 = 0.953$, Duty factor = $10 * \log(1/0.953) = 0.2$

802.11n (HT20): Duty cycle = $4.884/5.043 = 0.968$, Duty factor = $10 * \log(1/0.968) = 0.1$

802.11n (HT40): Duty cycle = $2.347/2.492 = 0.942$, Duty factor = $10 * \log(1/0.942) = 0.3$

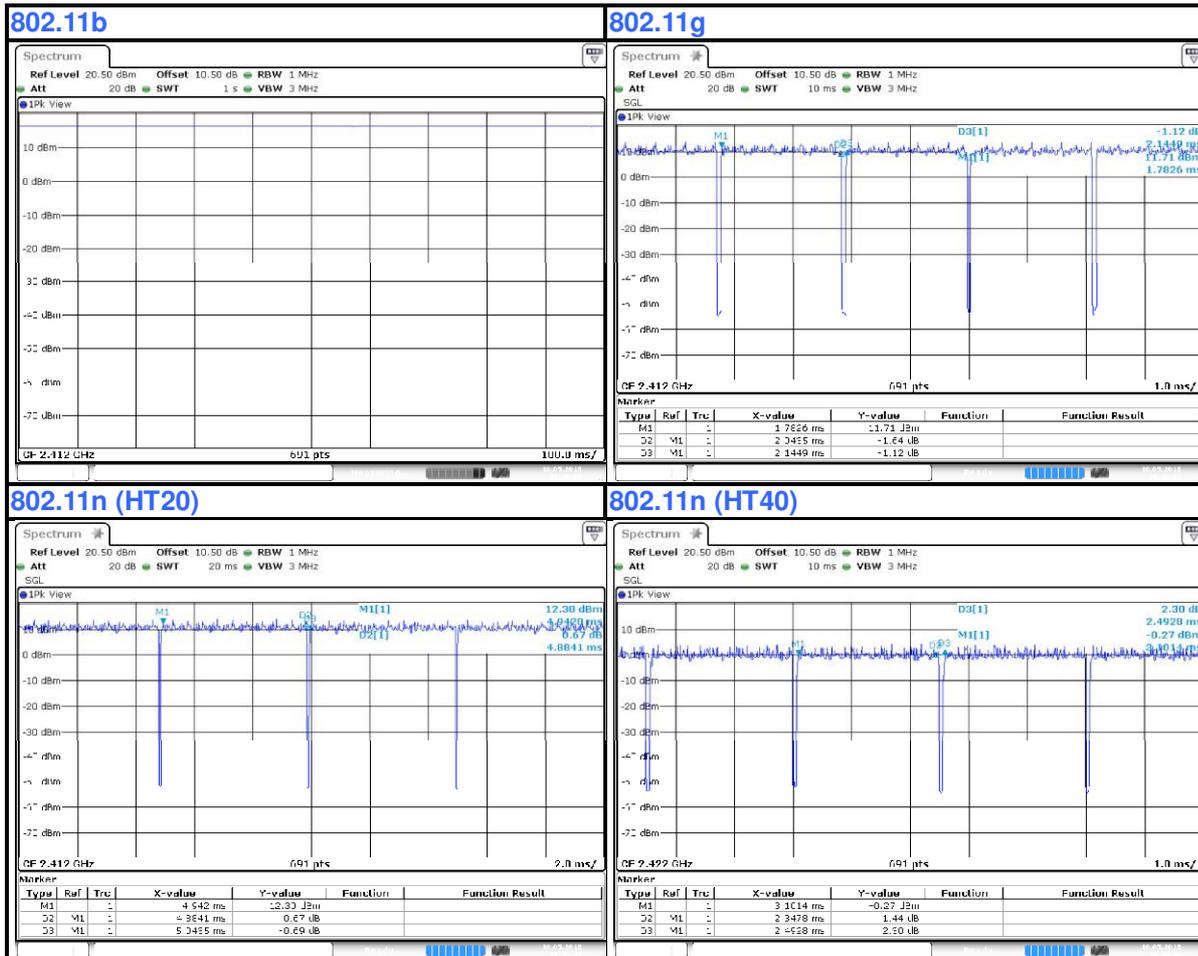

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook PC	DELL	PP27L	8SNZ12S	FCC DoC Approved	Provided by Lab
B.	Notebook PC	DELL	E6530	9331GV1	FCC DoC Approved	Provided by Lab


Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Items A & B acted as communication partners to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	LAN cable	2	10	N	0	Provided by Lab
2.	DC cable	1	1.5	N	0	Supplied by client

Note: The core(s) is(are) originally attached to the cable(s).

3.4.1 Configuration of System under Test

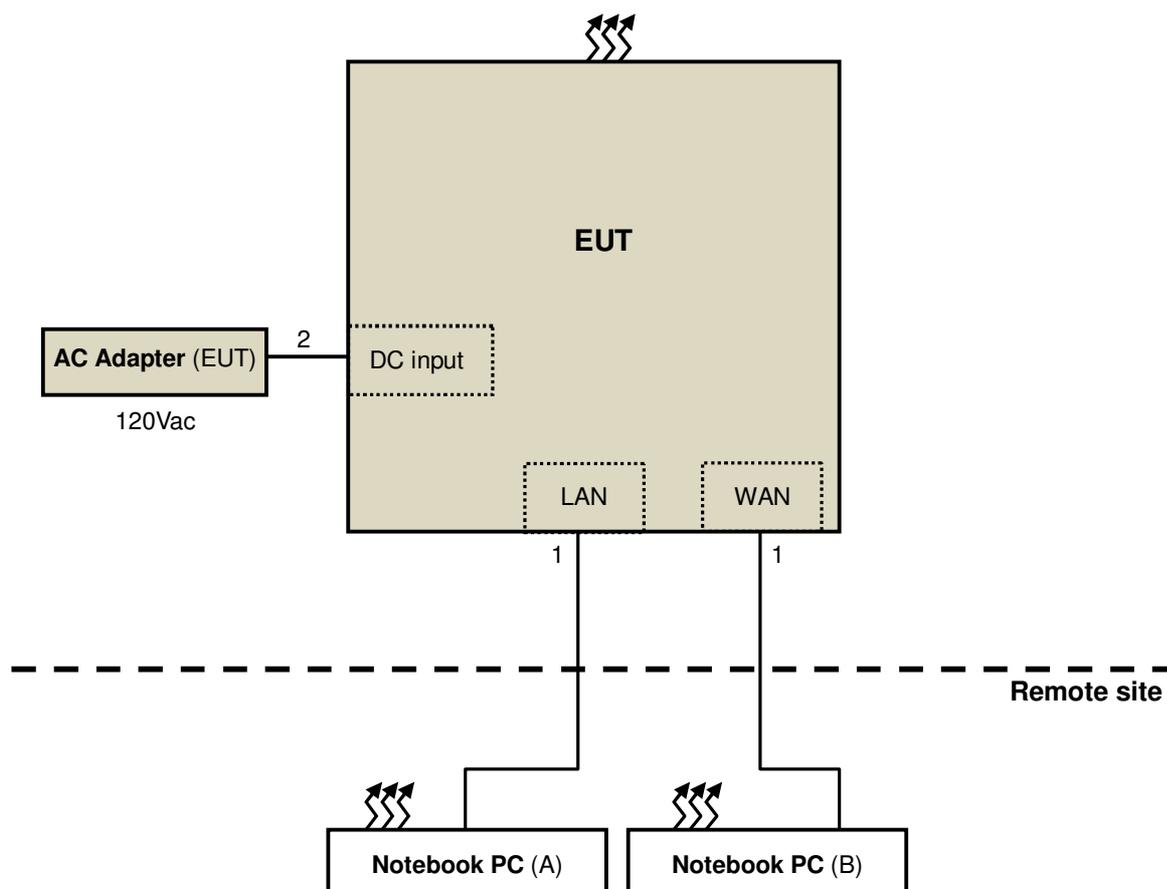

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
KDB 558074 D01 DTS Meas Guidance v03r05
KDB 662911 D01 Multiple Transmitter Output v02r01
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	Feb. 26, 2016	Feb. 25, 2017
HP Preamplifier	8449B	3008A01201	Feb. 26, 2016	Feb. 25, 2017
MITEQ Preamplifier	AMF-6F-260400-3 3-8P	892164	Mar. 01, 2016	Feb. 28, 2017
Agilent TEST RECEIVER	N9038A	MY51210129	Feb. 02, 2016	Feb. 01, 2017
Schwarzbeck Antenna	VULB 9168	139	Jan. 04, 2016	Jan. 03, 2017
Schwarzbeck Antenna	VHBA 9123	480	May 29, 2015	May 28, 2017
Schwarzbeck Horn Antenna	BBHA-9170	212	Jan. 08, 2016	Jan. 07, 2017
Schwarzbeck Horn Antenna	BBHA 9120-D1	D130	Jan. 21, 2016	Jan. 20, 2017
ADT. Turn Table	TT100	0306	NA	NA
ADT. Tower	AT100	0306	NA	NA
Software	Radiated_V7.6.15. 9.4	NA	NA	NA
SUHNER RF cable With 4dB PAD	SF104	CABLE-CH6	Aug. 15, 2015	Aug. 14, 2016
SUHNER RF cable With 3dB PAD	SF102	Cable-CH8-3.6m	Aug. 15, 2015	Aug. 14, 2016
KEYSIGHT Spectrum Analyzer	N9030A	MY54490260	Jul. 14, 2015	Jul. 13, 2016
EMCO Horn Antenna	3115	00028257	Jan. 19, 2016	Jan. 18, 2017
Highpass filter Wainwright Instruments	WHK 3.1/18G-10SS	SN 8	NA	NA
ROHDE & SCHWARZ Spectrum Analyzer	FSV40	101042	Sep. 23, 2015	Sep. 22, 2016
Anritsu Power Sensor	MA2411B	0738404	Apr. 28, 2016	Apr. 27, 2017
Anritsu Power Meter	ML2495A	0842014	Apr. 28, 2016	Apr. 27, 2017

- NOTE:**
1. The calibration interval of the above test instruments is 12/24 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 3. The test was performed in Chamber No. 6.
 4. The Industry Canada Reference No. IC 7450E-6.
 5. The FCC Site Registration No. is 447212.
 6. Tested Date: May 4 ~ 16, 2016.

4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle \geq 98%) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up

<Frequency Range below 1GHz>

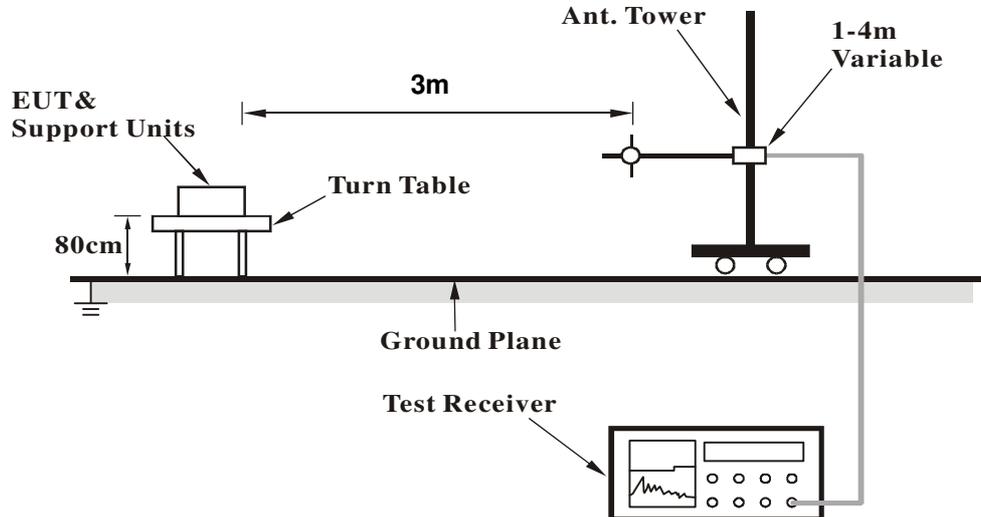

<Frequency Range above 1GHz>

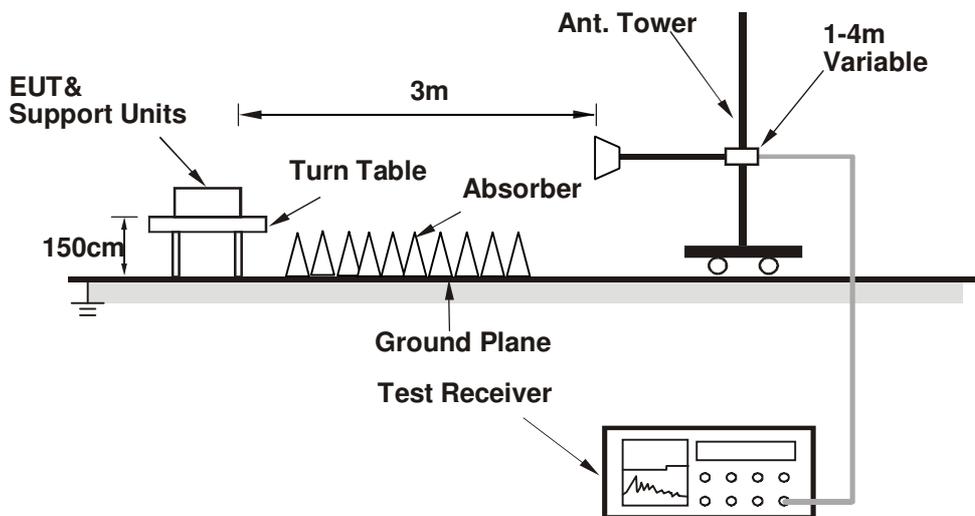

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Prepared notebook to act as communication partner and placed it outside of testing area.
- The communication partner connected with EUT via a LAN cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The communication partner sent data to EUT by command "PING".
- The necessary accessories enable the system in full functions.

4.1.7 Test Results

ABOVE 1GHz DATA

CDD Mode

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.1 PK	74.0	-15.9	1.50 H	190	58.45	-0.31
2	2390.00	41.7 AV	54.0	-12.3	1.50 H	190	41.97	-0.31
3	*2412.00	109.7 PK			1.50 H	190	109.88	-0.17
4	*2412.00	107.3 AV			1.50 H	190	107.49	-0.17
5	4824.00	45.3 PK	74.0	-28.7	2.73 H	325	39.21	6.10
6	4824.00	31.5 AV	54.0	-22.5	2.73 H	325	25.44	6.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.0 PK	74.0	-5.0	3.18 V	48	69.34	-0.31
2	2390.00	48.4 AV	54.0	-5.6	3.18 V	48	48.68	-0.31
3	*2412.00	118.5 PK			3.18 V	48	118.69	-0.17
4	*2412.00	116.0 AV			3.18 V	48	116.16	-0.17
5	4824.00	45.4 PK	74.0	-28.6	1.19 V	46	39.29	6.10
6	4824.00	32.7 AV	54.0	-21.4	1.19 V	46	26.55	6.10

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	109.8 PK			1.36 H	182	109.85	-0.01
2	*2437.00	107.1 AV			1.36 H	182	107.06	-0.01
3	4874.00	45.3 PK	74.0	-28.7	2.69 H	311	39.17	6.14
4	4874.00	31.6 AV	54.0	-22.4	2.69 H	311	25.50	6.14

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	119.3 PK			3.27 V	43	119.35	-0.01
2	*2437.00	116.5 AV			3.27 V	43	116.55	-0.01
3	4874.00	45.4 PK	74.0	-28.6	1.21 V	50	39.26	6.14
4	4874.00	32.9 AV	54.0	-21.1	1.21 V	50	26.77	6.14

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.5 PK			2.49 H	177	111.30	0.15
2	*2462.00	109.0 AV			2.49 H	177	108.82	0.15
3	2483.50	62.5 PK	74.0	-11.6	2.49 H	177	62.16	0.29
4	2483.50	43.5 AV	54.0	-10.5	2.49 H	177	43.22	0.29
5	4924.00	45.4 PK	74.0	-28.6	2.33 H	307	39.15	6.21
6	4924.00	31.9 AV	54.0	-22.1	2.33 H	307	25.71	6.21

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	118.9 PK			3.18 V	14	118.76	0.15
2	*2462.00	116.5 AV			3.18 V	14	116.38	0.15
3	2483.50	72.9 PK	74.0	-1.1	3.18 V	14	72.62	0.29
4	2483.50	49.2 AV	54.0	-4.8	3.18 V	14	48.90	0.29
5	4924.00	45.6 PK	74.0	-28.4	1.10 V	27	39.38	6.21
6	4924.00	33.1 AV	54.0	-21.0	1.10 V	27	26.84	6.21

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.2 PK	74.0	-16.9	2.57 H	175	57.46	-0.31
2	2390.00	43.4 AV	54.0	-10.6	2.57 H	175	43.72	-0.31
3	*2412.00	111.7 PK			2.57 H	175	111.84	-0.17
4	*2412.00	100.4 AV			2.57 H	175	100.57	-0.17
5	4824.00	45.2 PK	74.0	-28.8	2.63 H	288	39.14	6.10
6	4824.00	31.4 AV	54.0	-22.6	2.63 H	288	25.26	6.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.1 PK	74.0	-13.9	2.72 V	30	60.37	-0.31
2	2390.00	47.0 AV	54.0	-7.0	2.72 V	30	47.29	-0.31
3	*2412.00	121.3 PK			2.72 V	30	121.45	-0.17
4	*2412.00	108.0 AV			2.72 V	30	108.14	-0.17
5	4824.00	45.7 PK	74.0	-28.4	1.33 V	37	39.55	6.10
6	4824.00	33.0 AV	54.0	-21.0	1.33 V	37	26.86	6.10

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	111.5 PK			2.53 H	176	111.50	-0.01
2	*2437.00	100.3 AV			2.53 H	176	100.30	-0.01
3	4874.00	45.4 PK	74.0	-28.6	2.59 H	293	39.26	6.14
4	4874.00	31.5 AV	54.0	-22.5	2.59 H	293	25.33	6.14

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	120.4 PK			2.67 V	32	120.37	-0.01
2	*2437.00	108.3 AV			2.67 V	32	108.34	-0.01
3	4874.00	45.7 PK	74.0	-28.3	1.28 V	40	39.55	6.14
4	4874.00	33.0 AV	54.0	-21.0	1.28 V	40	26.83	6.14

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.9 PK			2.76 H	175	110.76	0.15
2	*2462.00	99.5 AV			2.76 H	175	99.36	0.15
3	2483.50	58.7 PK	74.0	-15.4	2.76 H	175	58.36	0.29
4	2483.50	43.1 AV	54.0	-10.9	2.76 H	175	42.83	0.29
5	4924.00	45.4 PK	74.0	-28.6	2.41 H	277	39.20	6.21
6	4924.00	32.0 AV	54.0	-22.0	2.41 H	277	25.83	6.21

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	119.7 PK			2.89 V	48	119.56	0.15
2	*2462.00	108.9 AV			2.89 V	48	108.79	0.15
3	2483.50	63.4 PK	74.0	-10.6	2.89 V	48	63.12	0.29
4	2483.50	46.7 AV	54.0	-7.4	2.89 V	48	46.36	0.29
5	4924.00	45.9 PK	74.0	-28.1	1.42 V	53	39.68	6.21
6	4924.00	33.2 AV	54.0	-20.8	1.42 V	53	27.03	6.21

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.1 PK	74.0	-18.9	2.57 H	178	55.39	-0.31
2	2390.00	41.5 AV	54.0	-12.5	2.57 H	178	41.83	-0.31
3	*2412.00	112.1 PK			2.57 H	178	112.24	-0.17
4	*2412.00	101.1 AV			2.57 H	178	101.23	-0.17
5	4824.00	45.2 PK	74.0	-28.8	2.25 H	311	39.10	6.10
6	4824.00	31.9 AV	54.0	-22.1	2.25 H	311	25.76	6.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.3 PK	74.0	-10.7	3.51 V	29	63.57	-0.31
2	2390.00	49.2 AV	54.0	-4.8	3.51 V	29	49.52	-0.31
3	*2412.00	120.5 PK			3.51 V	29	120.67	-0.17
4	*2412.00	109.4 AV			3.51 V	29	109.59	-0.17
5	4824.00	45.9 PK	74.0	-28.1	1.72 V	55	39.83	6.10
6	4824.00	32.9 AV	54.0	-21.2	1.72 V	55	26.75	6.10

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	111.3 PK			2.54 H	176	111.29	-0.01
2	*2437.00	101.3 AV			2.54 H	176	101.29	-0.01
3	4874.00	45.4 PK	74.0	-28.6	2.30 H	305	39.22	6.14
4	4874.00	32.0 AV	54.0	-22.1	2.30 H	305	25.81	6.14

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	120.2 PK			3.24 V	34	120.20	-0.01
2	*2437.00	109.2 AV			3.24 V	34	109.17	-0.01
3	4874.00	46.1 PK	74.0	-27.9	1.65 V	52	39.93	6.14
4	4874.00	32.7 AV	54.0	-21.3	1.65 V	52	26.58	6.14

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.6 PK			2.76 H	166	111.48	0.15
2	*2462.00	100.9 AV			2.76 H	166	100.79	0.15
3	2483.50	57.1 PK	74.0	-16.9	2.76 H	166	56.84	0.29
4	2483.50	42.3 AV	54.0	-11.7	2.76 H	166	42.02	0.29
5	4924.00	45.7 PK	74.0	-28.3	2.43 H	297	39.51	6.21
6	4924.00	32.1 AV	54.0	-21.9	2.43 H	297	25.93	6.21

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	120.9 PK			3.22 V	49	120.74	0.15
2	*2462.00	109.5 AV			3.22 V	49	109.36	0.15
3	2483.50	64.3 PK	74.0	-9.7	3.22 V	49	63.97	0.29
4	2483.50	46.8 AV	54.0	-7.2	3.22 V	49	46.51	0.29
5	4924.00	46.1 PK	74.0	-27.9	1.70 V	51	39.92	6.21
6	4924.00	33.0 AV	54.0	-21.0	1.70 V	51	26.80	6.21

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (40MHz)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.3 PK	74.0	-14.7	2.57 H	178	59.61	-0.31
2	2390.00	45.0 AV	54.0	-9.0	2.57 H	178	45.34	-0.31
3	*2422.00	102.3 PK			2.57 H	178	102.37	-0.11
4	*2422.00	92.2 AV			2.57 H	178	92.30	-0.11
5	4844.00	45.2 PK	74.0	-28.8	2.55 H	293	39.05	6.12
6	4844.00	31.4 AV	54.0	-22.6	2.55 H	293	25.26	6.12

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.1 PK	74.0	-5.9	3.75 V	29	68.44	-0.31
2	2390.00	53.0 AV	54.0	-1.0	3.75 V	29	53.30	-0.31
3	*2422.00	112.2 PK			3.75 V	29	112.30	-0.11
4	*2422.00	102.4 AV			3.75 V	29	102.54	-0.11
5	4844.00	45.5 PK	74.0	-28.5	1.14 V	36	39.38	6.12
6	4844.00	32.4 AV	54.0	-21.6	1.14 V	36	26.27	6.12

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	105.3 PK			2.54 H	174	105.31	-0.01
2	*2437.00	95.4 AV			2.54 H	174	95.44	-0.01
3	4874.00	45.2 PK	74.0	-28.8	2.49 H	283	39.10	6.14
4	4874.00	31.8 AV	54.0	-22.2	2.49 H	283	25.62	6.14

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	113.9 PK			3.69 V	33	113.95	-0.01
2	*2437.00	104.2 AV			3.69 V	33	104.23	-0.01
3	4874.00	45.7 PK	74.0	-28.3	1.20 V	33	39.58	6.14
4	4874.00	32.5 AV	54.0	-21.5	1.20 V	33	26.39	6.14

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	106.8 PK			2.78 H	178	106.72	0.09
2	*2452.00	96.9 AV			2.78 H	178	96.82	0.09
3	2483.50	60.0 PK	74.0	-14.0	2.78 H	178	59.74	0.29
4	2483.50	47.3 AV	54.0	-6.7	2.78 H	178	47.02	0.29
5	4904.00	45.7 PK	74.0	-28.3	2.61 H	277	39.52	6.16
6	4904.00	32.2 AV	54.0	-21.8	2.61 H	277	26.00	6.16

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	116.8 PK			3.20 V	34	116.68	0.09
2	*2452.00	107.1 AV			3.20 V	34	106.99	0.09
3	2483.50	67.2 PK	74.0	-6.8	3.20 V	34	66.90	0.29
4	2483.50	51.4 AV	54.0	-2.6	3.20 V	34	51.14	0.29
5	4904.00	46.2 PK	74.0	-27.8	1.27 V	28	40.01	6.16
6	4904.00	33.1 AV	54.0	-21.0	1.27 V	28	26.89	6.16

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Beamforming Mode

802.11n (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.3 PK	74.0	-19.7	2.93 H	301	54.63	-0.31
2	2390.00	39.9 AV	54.0	-14.2	2.93 H	301	40.16	-0.31
3	*2412.00	109.8 PK			2.93 H	301	109.97	-0.17
4	*2412.00	100.2 AV			2.93 H	301	100.34	-0.17
5	4824.00	45.1 PK	74.0	-28.9	1.57 H	235	38.96	6.10
6	4824.00	31.6 AV	54.0	-22.4	1.57 H	235	25.46	6.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.4 PK	74.0	-1.6	3.34 V	360	72.70	-0.31
2	2390.00	50.0 AV	54.0	-4.0	3.34 V	360	50.29	-0.31
3	*2412.00	119.3 PK			3.34 V	275	119.43	-0.17
4	*2412.00	108.2 AV			3.34 V	275	108.39	-0.17
5	4824.00	45.1 PK	74.0	-28.9	1.69 V	69	38.98	6.10
6	4824.00	32.7 AV	54.0	-21.3	1.69 V	69	26.64	6.10

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	110.1 PK			2.95 H	162	110.54	-0.42
2	*2437.00	100.6 AV			2.95 H	162	100.98	-0.42
3	4874.00	44.8 PK	74.0	-29.2	2.10 H	156	38.65	6.14
4	4874.00	31.6 AV	54.0	-22.4	2.10 H	156	25.42	6.14

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	119.3 PK			2.39 V	2	119.30	-0.01
2	*2437.00	107.4 AV			2.39 V	2	107.44	-0.01
3	4874.00	45.8 PK	74.0	-28.2	1.78 V	13	39.65	6.14
4	4874.00	32.3 AV	54.0	-21.7	1.78 V	13	26.15	6.14

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.6 PK			2.88 H	157	107.49	0.15
2	*2462.00	96.7 AV			2.88 H	157	96.58	0.15
3	2483.50	57.5 PK	74.0	-16.6	2.88 H	157	57.16	0.29
4	2483.50	43.0 AV	54.0	-11.0	2.88 H	157	42.68	0.29
5	4924.00	46.1 PK	74.0	-28.0	2.39 H	188	39.84	6.21
6	4924.00	32.1 AV	54.0	-21.9	2.39 H	188	25.86	6.21

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	117.1 PK			3.20 V	345	116.94	0.15
2	*2462.00	105.2 AV			3.20 V	345	105.09	0.15
3	2483.50	64.7 PK	74.0	-9.3	3.20 V	345	64.41	0.29
4	2483.50	47.1 AV	54.0	-6.9	3.20 V	345	46.84	0.29
5	4924.00	45.7 PK	74.0	-28.3	1.19 V	237	39.45	6.21
6	4924.00	32.5 AV	54.0	-21.5	1.19 V	237	26.28	6.21

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (40MHz)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.5 PK	74.0	-15.5	1.92 H	15	58.79	-0.31
2	2390.00	44.4 AV	54.0	-9.6	1.92 H	15	44.68	-0.31
3	*2422.00	105.4 PK			1.92 H	15	105.47	-0.11
4	*2422.00	95.3 AV			1.92 H	15	95.38	-0.11
5	4844.00	44.8 PK	74.0	-29.2	1.20 H	164	38.66	6.12
6	4844.00	31.1 AV	54.0	-22.9	1.20 H	164	25.02	6.12

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.0 PK	74.0	-11.0	2.49 V	20	63.28	-0.31
2	2390.00	52.1 AV	54.0	-2.0	2.49 V	20	52.36	-0.31
3	*2422.00	115.6 PK			2.49 V	20	115.69	-0.11
4	*2422.00	104.3 AV			2.49 V	20	104.39	-0.11
5	4844.00	45.5 PK	74.0	-28.5	1.28 V	341	39.36	6.12
6	4844.00	32.1 AV	54.0	-21.9	1.28 V	341	26.01	6.12

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	107.8 PK			1.71 H	145	107.85	-0.01
2	*2437.00	98.2 AV			1.71 H	145	98.25	-0.01
3	4874.00	45.3 PK	74.0	-28.7	3.41 H	251	39.12	6.14
4	4874.00	31.2 AV	54.0	-22.8	3.41 H	251	25.09	6.14

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	118.9 PK			1.79 V	216	118.86	-0.01
2	*2437.00	107.7 AV			1.79 V	216	107.68	-0.01
3	4874.00	45.8 PK	74.0	-28.2	2.06 V	62	39.62	6.14
4	4874.00	32.3 AV	54.0	-21.7	2.06 V	62	26.14	6.14

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	109.1 PK			3.06 H	194	108.96	0.09
2	*2452.00	98.8 AV			3.06 H	194	98.75	0.09
3	2483.50	59.3 PK	74.0	-14.7	3.06 H	194	58.98	0.29
4	2483.50	47.7 AV	54.0	-6.4	3.06 H	194	47.36	0.29
5	4904.00	45.5 PK	74.0	-28.5	2.62 H	348	39.32	6.16
6	4904.00	32.5 AV	54.0	-21.5	2.62 H	348	26.31	6.16

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	119.7 PK			2.67 V	14	119.65	0.09
2	*2452.00	108.4 AV			2.67 V	14	108.30	0.09
3	2483.50	66.5 PK	74.0	-7.5	2.67 V	14	66.21	0.29
4	2483.50	50.5 AV	54.0	-3.5	2.67 V	14	50.19	0.29
5	4904.00	46.0 PK	74.0	-28.0	1.98 V	64	39.88	6.16
6	4904.00	32.9 AV	54.0	-21.1	1.98 V	64	26.76	6.16

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

BELOW 1GHz WORST-CASE DATA

802.11n (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.58	24.3 QP	40.0	-15.7	4.00 H	332	35.77	-11.47
2	108.86	21.4 QP	43.5	-22.1	4.00 H	104	34.21	-12.82
3	321.82	35.0 QP	46.0	-11.0	3.15 H	73	42.36	-7.35
4	506.61	30.5 QP	46.0	-15.5	1.79 H	237	33.88	-3.40
5	785.92	30.2 QP	46.0	-15.8	1.10 H	66	28.73	1.44
6	947.77	33.2 QP	46.0	-12.8	1.00 H	271	28.62	4.58

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	36.16	33.1 QP	40.0	-6.9	1.53 V	135	44.17	-11.07
2	157.51	22.1 QP	43.5	-21.4	1.00 V	49	31.41	-9.27
3	326.04	39.2 QP	46.0	-6.8	1.07 V	242	46.38	-7.22
4	509.42	29.9 QP	46.0	-16.1	2.28 V	42	33.17	-3.25
5	799.99	32.7 QP	46.0	-13.3	2.91 V	321	31.17	1.54
6	977.84	33.7 QP	54.0	-20.3	2.03 V	212	28.75	4.96

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
ROHDE & SCHWARZ TEST RECEIVER	ESCS 30	100276	Apr. 12, 2016	Apr. 11, 2017
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ENV216	101197	May 04, 2016	May 03, 2017
LISN With Adapter (for EUT)	AD10	C10Ada-002	May 04, 2016	May 03, 2017
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100218	Nov. 25, 2015	Nov. 24, 2016
SCHWARZBECK Artificial Mains Network (For EUT)	NNLK8129	8129229	May 04, 2016	May 03, 2017
Software	Cond_V7.3.7	NA	NA	NA
RF cable (JYEBAO) With 10dB PAD	5D-FB	Cable-C10.01	Feb. 15, 2016	Feb. 14, 2017
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-011484	May 12, 2016	May 11, 2017
ROHDE & SCHWARZ Artificial Mains Network (For TV EUT)	ESH3-Z5	100220	Nov. 13, 2015	Nov. 12, 2016
LISN With Adapter (for TV EUT)	100220	N/A	Nov. 13, 2015	Nov. 12, 2016

Notes: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in Shielded Room No. 10.

3. The VCCI Site Registration No. C-1852.

4. Tested Date: May 12, 2016.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

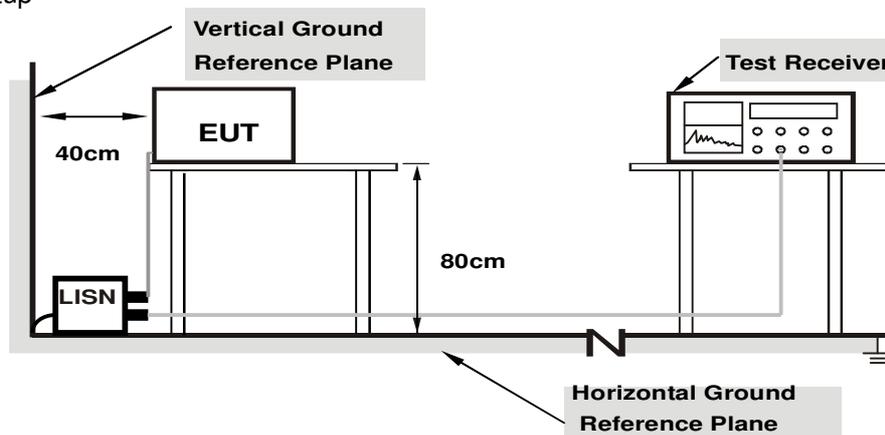

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.

4.2.7 Test Results

CDD Mode


802.11n (20MHz)

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
------------------------	----------------	---	--------------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.66	38.00	25.74	47.66	35.40	65.79	55.79	-18.13	-20.39
2	0.19297	9.65	36.81	22.54	46.46	32.19	63.91	53.91	-17.45	-21.72
3	0.33750	9.67	31.15	28.23	40.82	37.90	59.26	49.26	-18.44	-11.36
4	0.99766	9.77	12.56	5.54	22.33	15.31	56.00	46.00	-33.67	-30.69
5	3.32813	9.96	20.63	13.26	30.59	23.22	56.00	46.00	-25.41	-22.78
6	7.12109	10.06	23.39	17.92	33.45	27.98	60.00	50.00	-26.55	-22.02

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

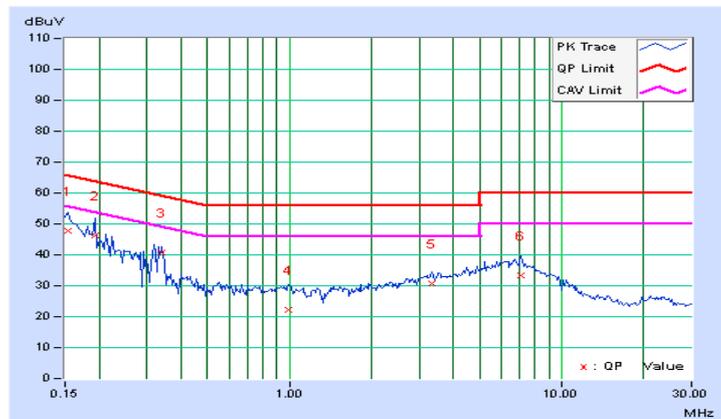


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
------------------------	----------------	---	--------------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15001	9.69	40.38	26.85	50.07	36.54	66.00	56.00	-15.93	-19.46
2	0.18516	9.69	33.50	22.27	43.19	31.96	64.25	54.25	-21.06	-22.29
3	0.32578	9.71	26.78	13.51	36.49	23.22	59.56	49.56	-23.07	-26.34
4	3.53516	10.06	20.40	14.04	30.46	24.10	56.00	46.00	-25.54	-21.90
5	7.46875	10.16	23.49	17.96	33.65	28.12	60.00	50.00	-26.35	-21.88
6	10.00000	10.20	17.52	12.13	27.72	22.33	60.00	50.00	-32.28	-27.67

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

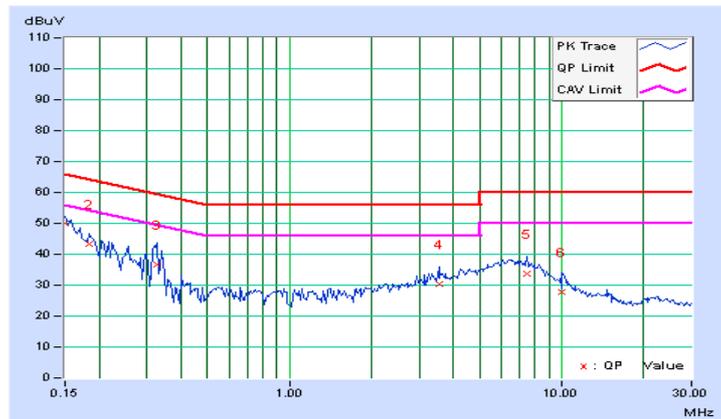


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

CDD Mode
802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	8.10	8.11	8.11	8.11	0.5	Pass
6	2437	8.10	8.10	8.10	8.10	0.5	Pass
11	2462	8.10	8.11	8.10	8.10	0.5	Pass

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	15.70	15.97	16.26	16.30	0.5	Pass
6	2437	16.34	16.05	16.07	16.32	0.5	Pass
11	2462	16.31	16.05	16.07	16.31	0.5	Pass

802.11n (20MHz)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	16.26	16.23	16.82	16.06	0.5	Pass
6	2437	16.57	16.83	16.55	16.77	0.5	Pass
11	2462	16.82	16.56	16.55	16.55	0.5	Pass

802.11n (40MHz)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
3	2422	35.19	35.24	35.26	35.25	0.5	Pass
6	2437	35.12	35.25	35.26	35.18	0.5	Pass
9	2452	35.19	35.25	35.15	35.24	0.5	Pass

SPECTRUM PLOT OF WORST VALUE


802.11b

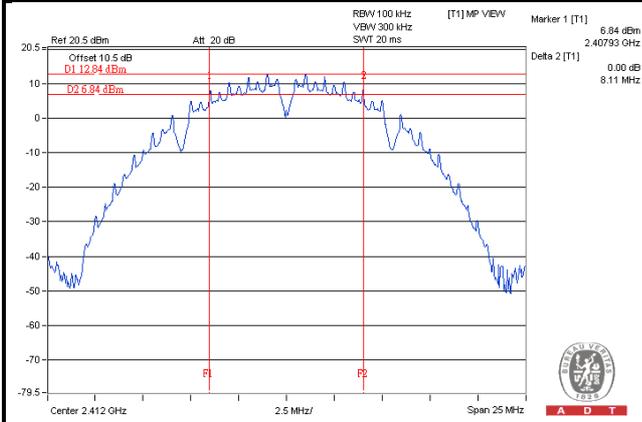


802.11g

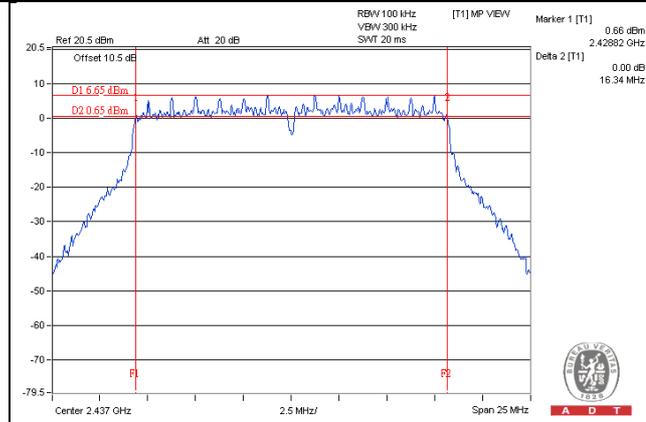

802.11n (20MHz)

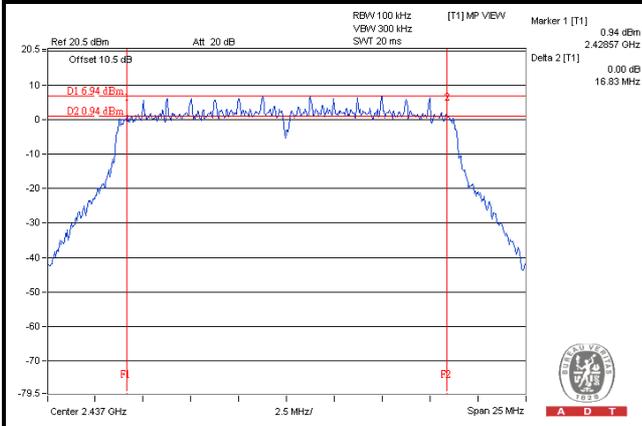

802.11n (40MHz)

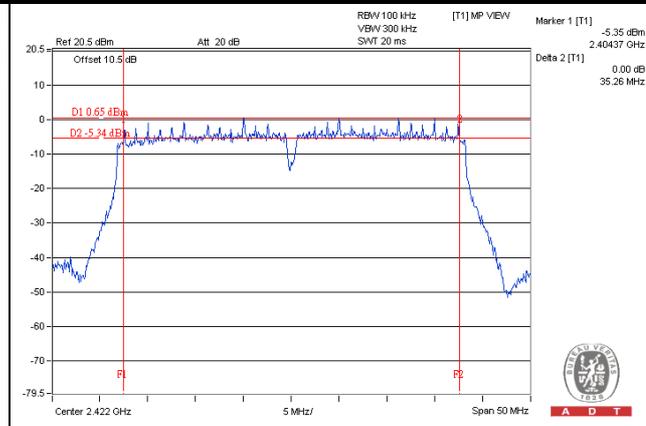

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $NANT \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any NANT;

Array Gain = $5 \log(NANT/NSS)$ dB or 3 dB, whichever is less for 20-MHz channel widths with $NANT \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(NANT/NSS)$ dB.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

A peak / average power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak / average power sensor. Record the power level.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

CDD Mode

FOR PEAK POWER

802.11b

Chan.	Freq. (MHz)	Peak Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	23.71	23.61	23.77	23.69	936.694	29.72	30	Pass
6	2437	23.90	23.79	23.82	23.81	966.230	29.85	30	Pass
11	2462	22.31	22.83	23.21	22.90	766.478	28.84	30	Pass

802.11g

Chan.	Freq. (MHz)	Peak Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	23.78	23.61	23.73	23.92	951.048	29.78	30	Pass
6	2437	23.91	23.67	23.82	23.83	961.383	29.83	30	Pass
11	2462	23.91	23.90	23.91	23.78	976.326	29.90	30	Pass

802.11n (20MHz)

Chan.	Freq. (MHz)	Peak Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	23.90	23.98	23.66	23.97	977.239	29.90	30	Pass
6	2437	23.72	23.66	23.84	23.80	949.765	29.78	30	Pass
11	2462	23.72	23.92	23.84	23.97	973.671	29.88	30	Pass

802.11n (40MHz)

Chan.	Freq. (MHz)	Peak Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	20.39	20.36	20.10	20.24	426.050	26.29	30	Pass
6	2437	23.89	23.66	23.88	23.87	965.304	29.85	30	Pass
9	2452	23.99	23.91	23.63	23.97	976.782	29.90	30	Pass

FOR AVERAGE POWER
802.11b

Chan.	Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	21.10	20.98	20.91	21.06	505.093	27.03
6	2437	21.16	21.16	21.20	21.23	525.799	27.21
11	2462	19.97	20.07	20.57	20.34	423.105	26.26

802.11g

Chan.	Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	17.63	17.49	17.70	17.64	231.008	23.64
6	2437	17.77	17.56	17.79	17.67	235.453	23.72
11	2462	17.94	17.60	17.73	17.91	240.869	23.82

802.11n (20MHz)

Chan.	Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	17.39	17.32	17.42	17.41	219.068	23.41
6	2437	17.33	17.18	17.29	17.45	215.485	23.33
11	2462	17.60	17.31	17.56	17.77	228.228	23.58

802.11n (40MHz)


Chan.	Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1	Chain 2	Chain 3		
3	2422	13.75	14.05	13.80	13.90	97.659	19.90
6	2437	17.66	17.56	17.51	17.64	229.801	23.61
9	2452	17.51	17.32	17.34	17.49	220.620	23.44

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 Test Setup

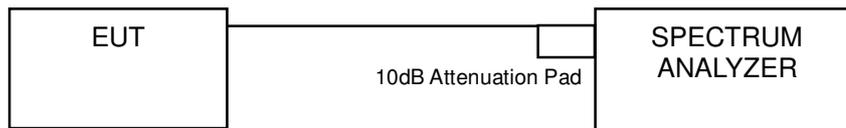

4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d. Set the VBW $\geq 3 \times \text{RBW}$.
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

CDD Mode

802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=4) dB	Total PSD (dBm)	Limit (dBm)	Pass /Fail
0	1	2412	-4.44	6.02	1.58	5.90	Pass
	6	2437	-4.20	6.02	1.82	5.90	Pass
	11	2462	-5.16	6.02	0.86	5.90	Pass
1	1	2412	-4.90	6.02	1.12	5.90	Pass
	6	2437	-4.46	6.02	1.56	5.90	Pass
	11	2462	-4.74	6.02	1.28	5.90	Pass
2	1	2412	-4.07	6.02	1.95	5.90	Pass
	6	2437	-5.65	6.02	0.37	5.90	Pass
	11	2462	-5.58	6.02	0.44	5.90	Pass
3	1	2412	-4.80	6.02	1.22	5.90	Pass
	6	2437	-5.23	6.02	0.79	5.90	Pass
	11	2462	-6.44	6.02	-0.42	5.90	Pass

NOTE: Directional gain = $2.08\text{dBi} + 10\log(4) = 8.1\text{dBi} > 6\text{dBi}$, so the power spectral density limit shall be reduced to $8 - (8.1 - 6) = 5.90\text{dBm}$.

802.11g

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=4) dB	Total PSD (dBm)	Limit (dBm)	Pass /Fail
0	1	2412	-10.29	6.02	-4.27	5.90	Pass
	6	2437	-9.50	6.02	-3.48	5.90	Pass
	11	2462	-10.26	6.02	-4.24	5.90	Pass
1	1	2412	-10.64	6.02	-4.62	5.90	Pass
	6	2437	-10.21	6.02	-4.19	5.90	Pass
	11	2462	-9.08	6.02	-3.06	5.90	Pass
2	1	2412	-9.75	6.02	-3.73	5.90	Pass
	6	2437	-9.92	6.02	-3.90	5.90	Pass
	11	2462	-8.80	6.02	-2.78	5.90	Pass
3	1	2412	-9.51	6.02	-3.49	5.90	Pass
	6	2437	-8.33	6.02	-2.31	5.90	Pass
	11	2462	-9.45	6.02	-3.43	5.90	Pass

NOTE: Directional gain = $2.08\text{dBi} + 10\log(4) = 8.1\text{dBi} > 6\text{dBi}$, so the power spectral density limit shall be reduced to $8 - (8.1 - 6) = 5.90\text{dBm}$.

802.11n (20MHz)

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=4) dB	Total PSD (dBm)	Limit (dBm)	Pass /Fail
0	1	2412	-9.82	6.02	-3.80	5.90	Pass
	6	2437	-10.01	6.02	-3.99	5.90	Pass
	11	2462	-7.53	6.02	-1.51	5.90	Pass
1	1	2412	-8.58	6.02	-2.56	5.90	Pass
	6	2437	-9.39	6.02	-3.37	5.90	Pass
	11	2462	-8.92	6.02	-2.90	5.90	Pass
2	1	2412	-9.13	6.02	-3.11	5.90	Pass
	6	2437	-8.21	6.02	-2.19	5.90	Pass
	11	2462	-9.88	6.02	-3.86	5.90	Pass
3	1	2412	-9.68	6.02	-3.66	5.90	Pass
	6	2437	-9.51	6.02	-3.49	5.90	Pass
	11	2462	-7.74	6.02	-1.72	5.90	Pass

NOTE: Directional gain = $2.08\text{dBi} + 10\log(4) = 8.1\text{dBi} > 6\text{dBi}$, so the power spectral density limit shall be reduced to $8 - (8.1 - 6) = 5.90\text{dBm}$.


802.11n (40MHz)

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=4) dB	Total PSD (dBm)	Limit (dBm)	Pass /Fail
0	3	2422	-16.50	6.02	-10.48	5.90	Pass
	6	2437	-12.95	6.02	-6.93	5.90	Pass
	9	2452	-12.97	6.02	-6.95	5.90	Pass
1	3	2422	-15.94	6.02	-9.92	5.90	Pass
	6	2437	-12.53	6.02	-6.51	5.90	Pass
	9	2452	-12.39	6.02	-6.37	5.90	Pass
2	3	2422	-15.04	6.02	-9.02	5.90	Pass
	6	2437	-11.86	6.02	-5.84	5.90	Pass
	9	2452	-12.29	6.02	-6.27	5.90	Pass
3	3	2422	-16.28	6.02	-10.26	5.90	Pass
	6	2437	-12.61	6.02	-6.59	5.90	Pass
	9	2452	-12.22	6.02	-6.20	5.90	Pass


NOTE: Directional gain = $2.08\text{dBi} + 10\log(4) = 8.1\text{dBi} > 6\text{dBi}$, so the power spectral density limit shall be reduced to $8 - (8.1 - 6) = 5.90\text{dBm}$.

Spectrum Plot of Worst Value


802.11b

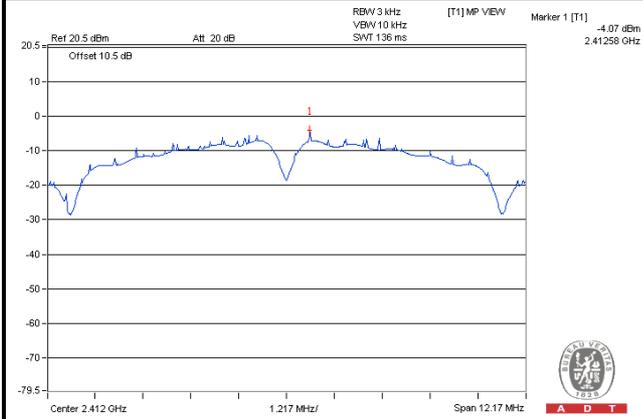


802.11g

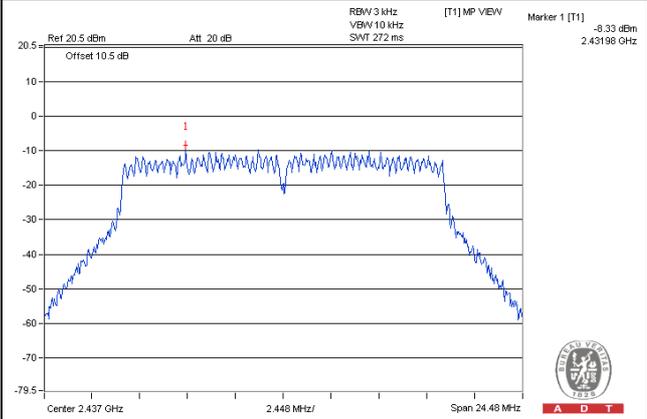

802.11n (20MHz)

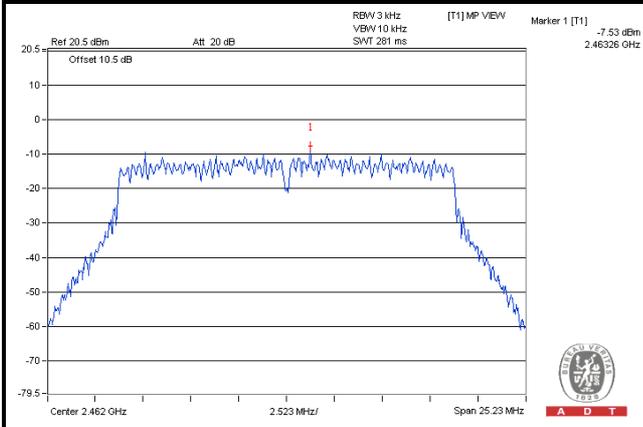

802.11n (40MHz)

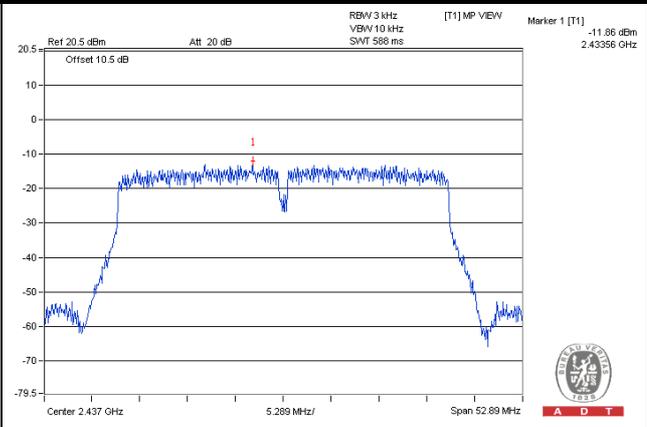


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition



Same as Item 4.3.6

4.6.7 Test Results



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

802.11b: CHAIN 0



CH 1

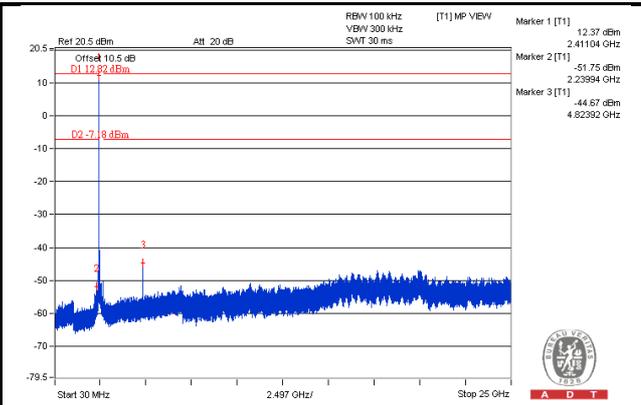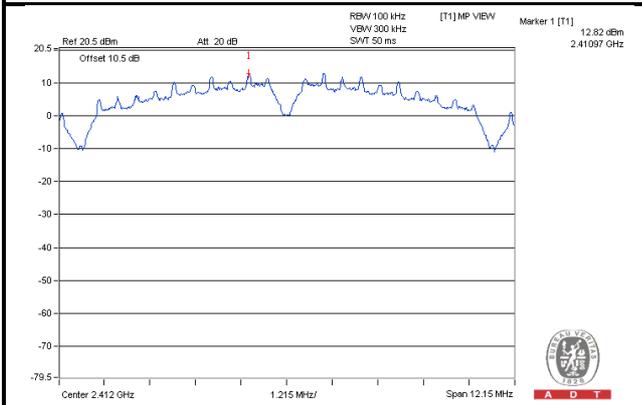


CH 6

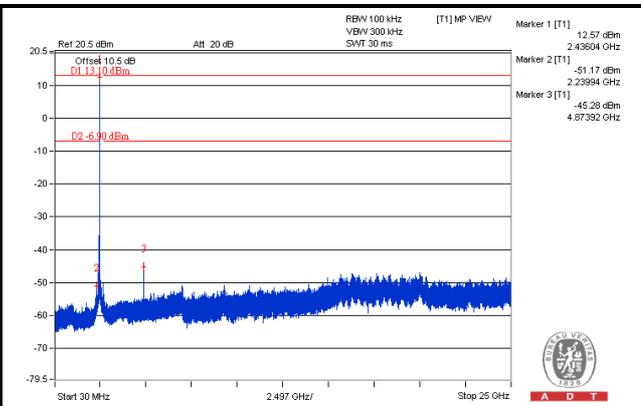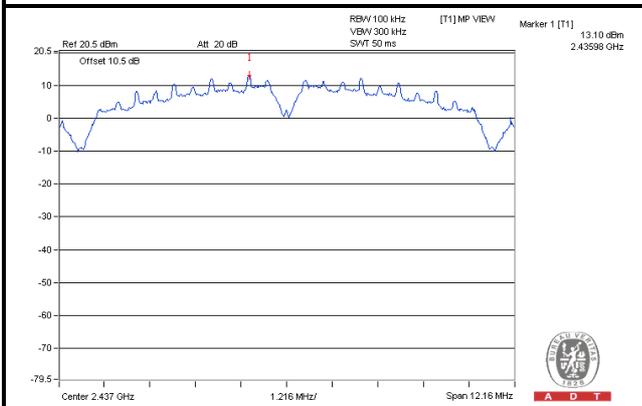


CH 11

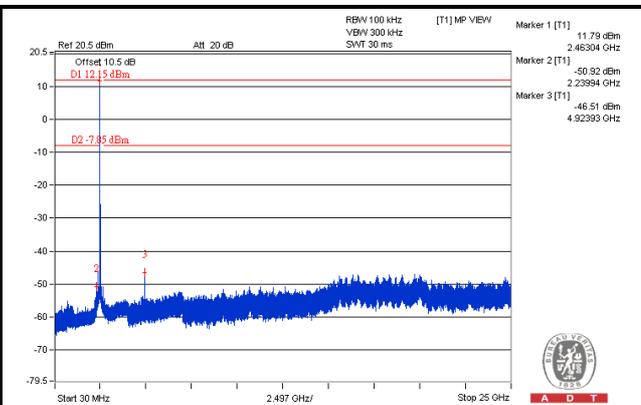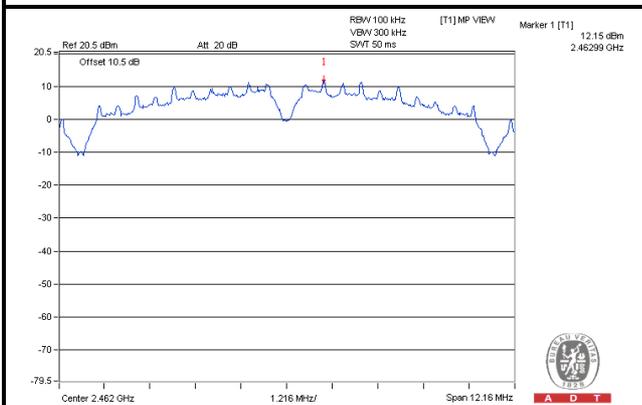

CH 1 Band edge


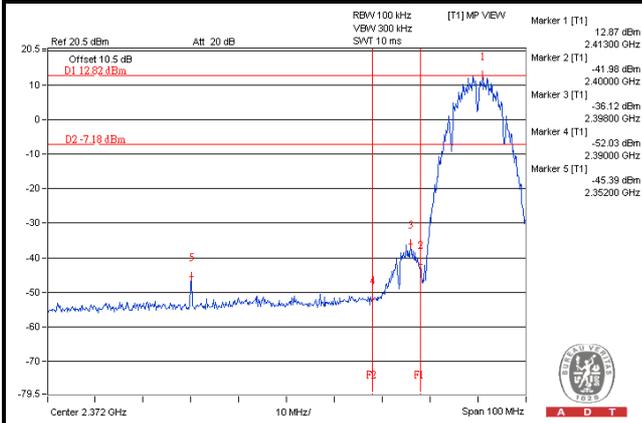


CH 11 Band edge


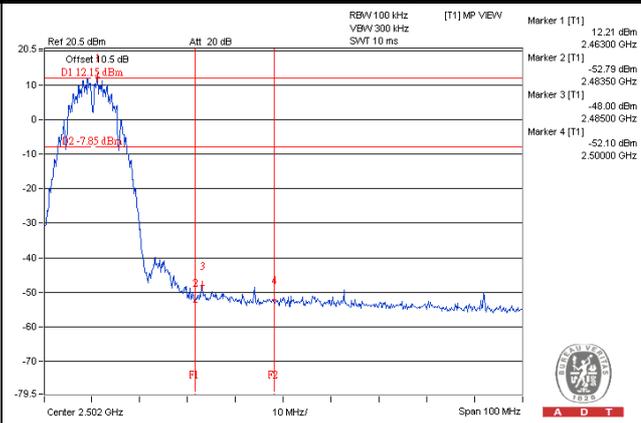


CHAIN 1



CH 1

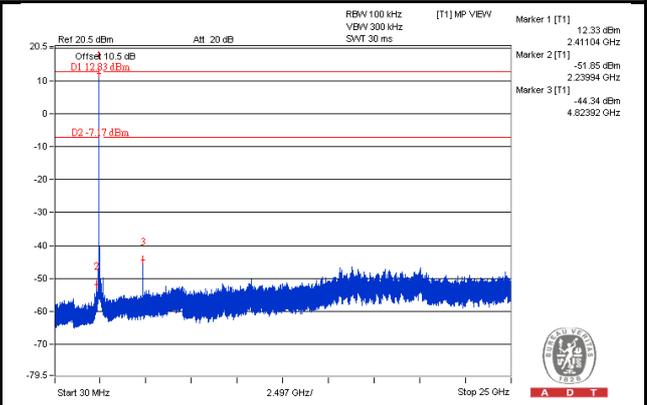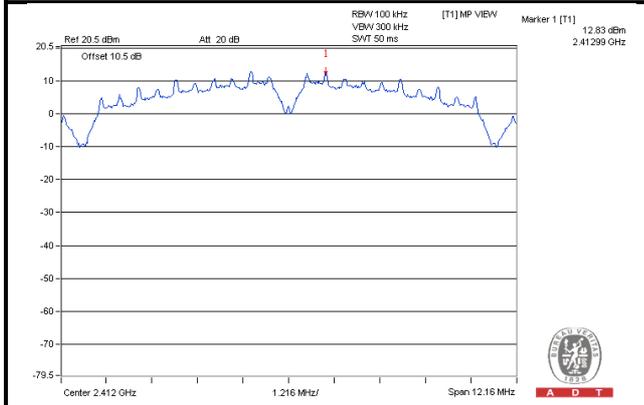


CH 6

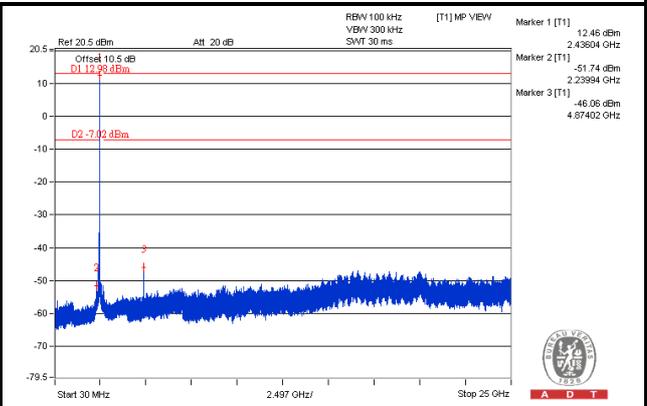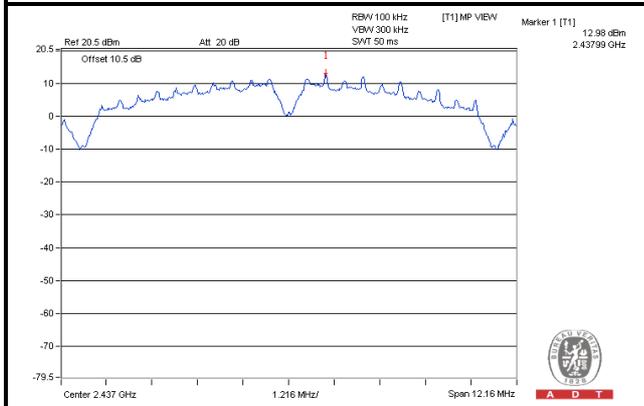


CH 11

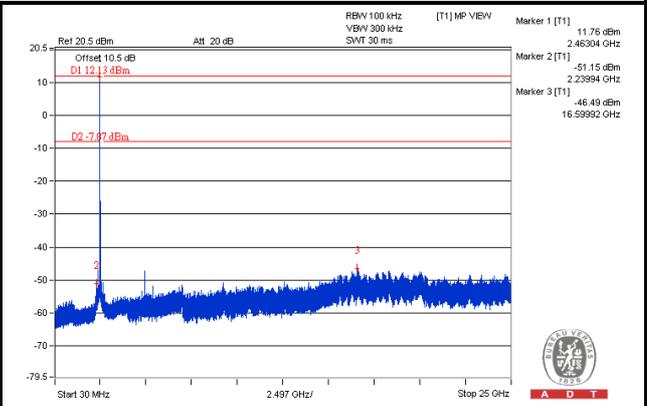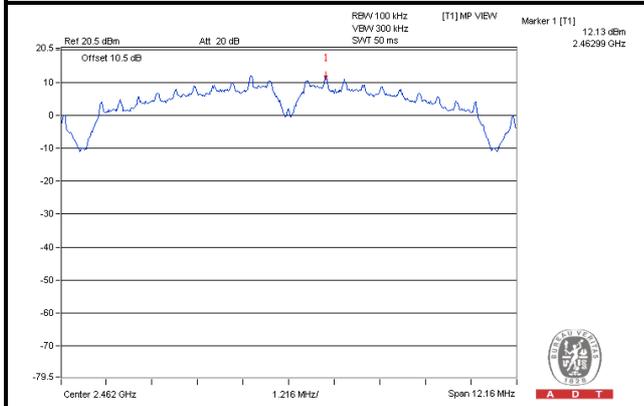

CH 1 Band edge


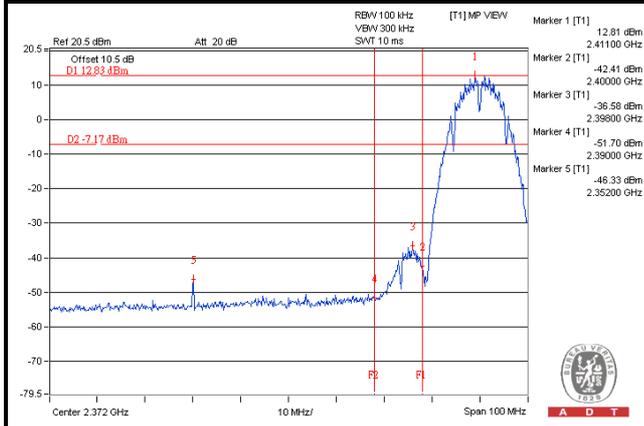


CH 11 Band edge


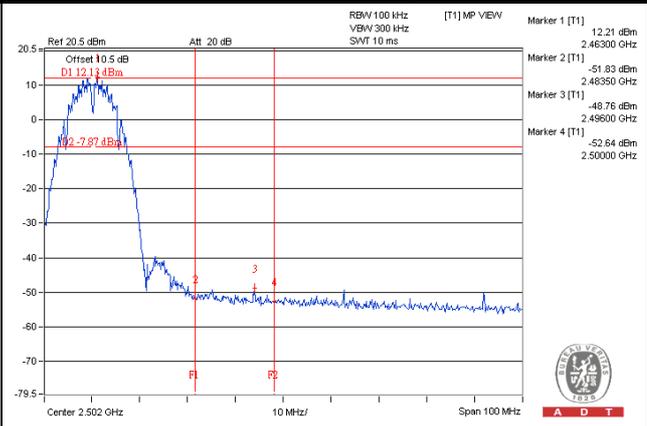


CHAIN 2



CH 1

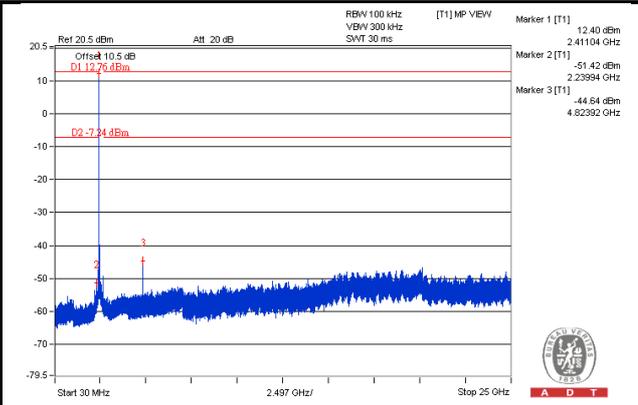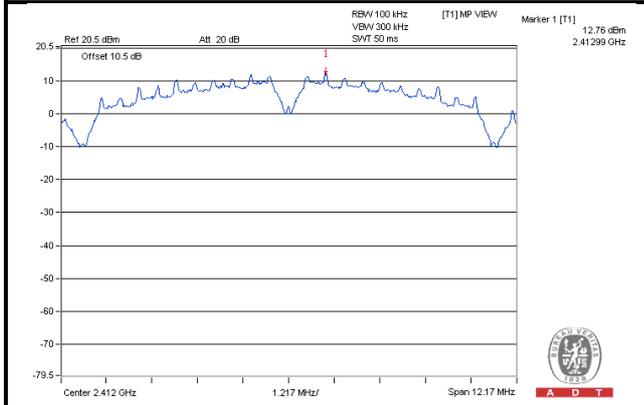


CH 6

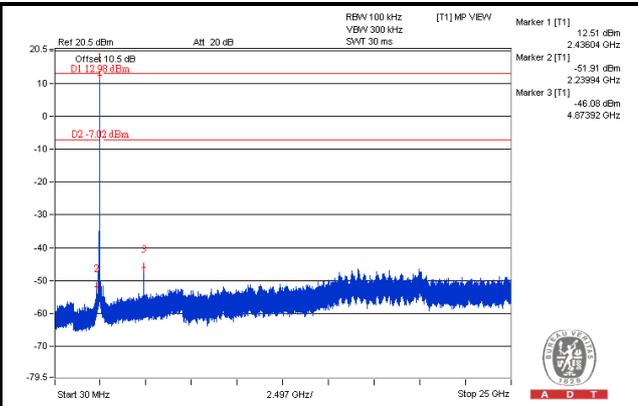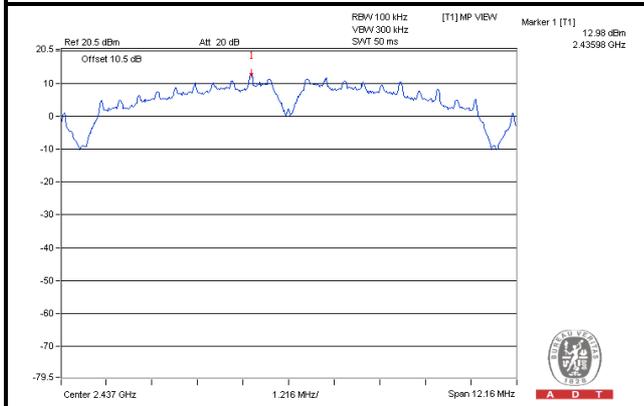


CH 11

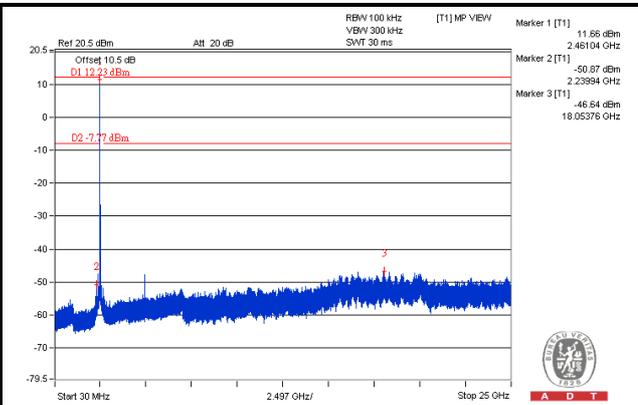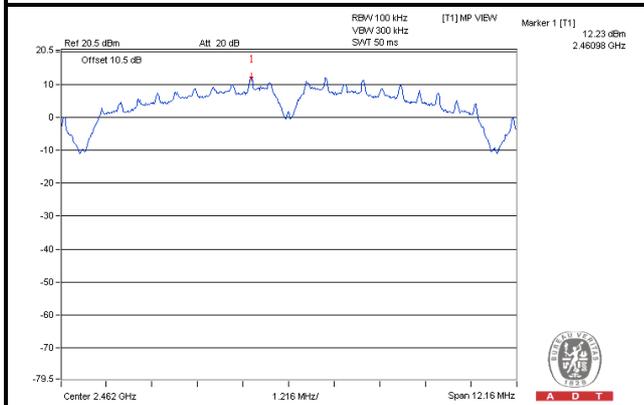

CH 1 Band edge


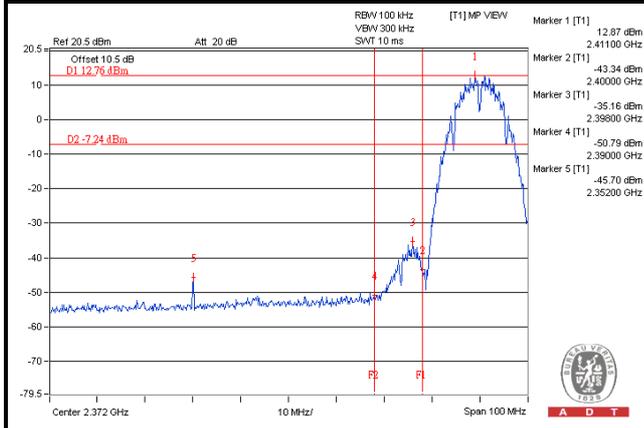


CH 11 Band edge


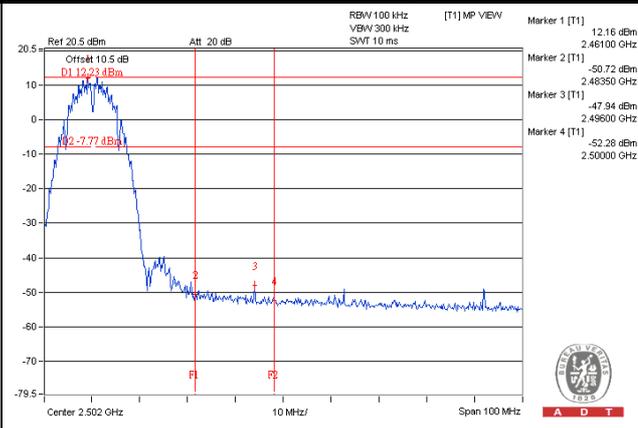


CHAIN 3



CH 1

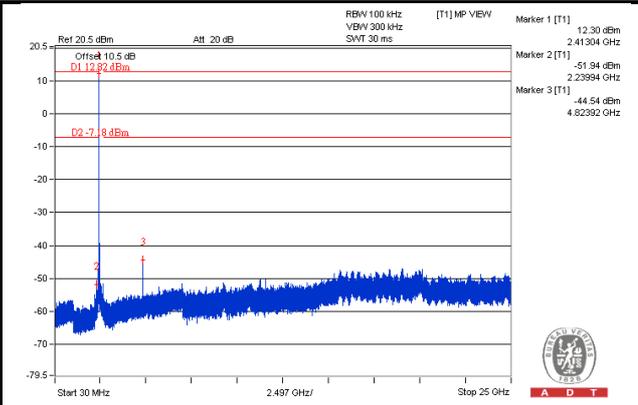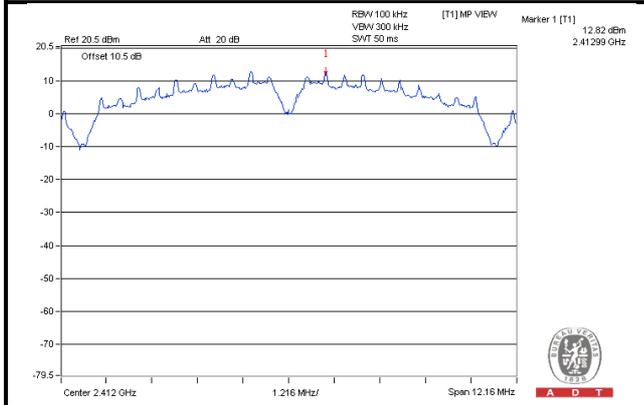


CH 6

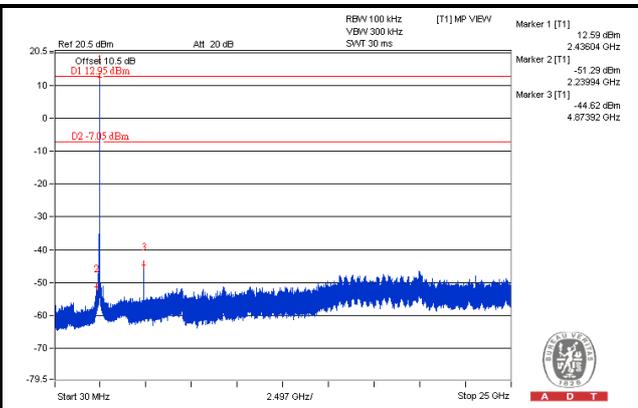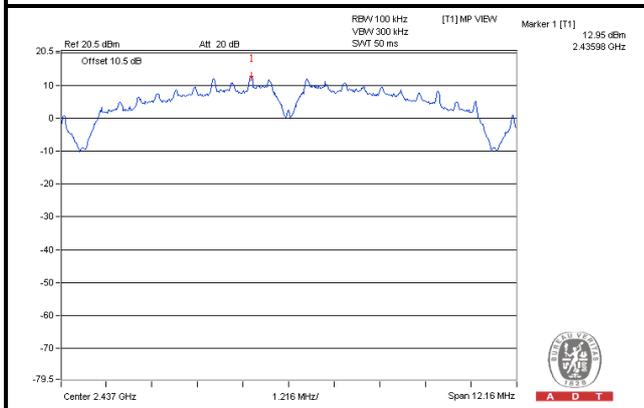


CH 11

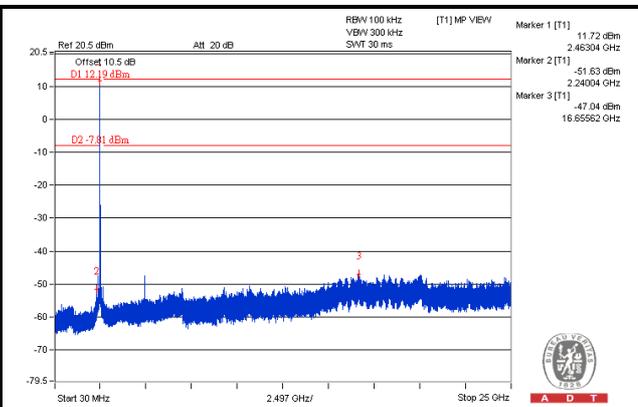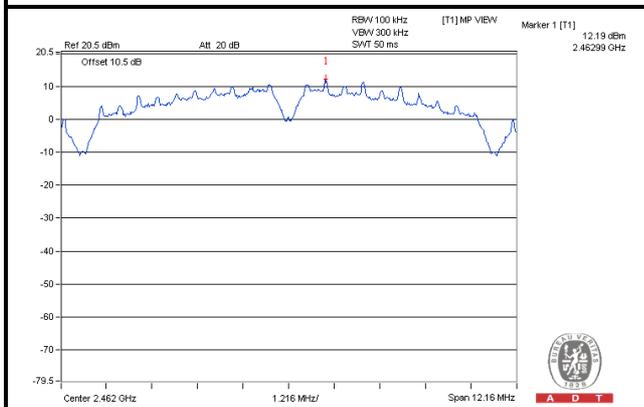

CH 1 Band edge


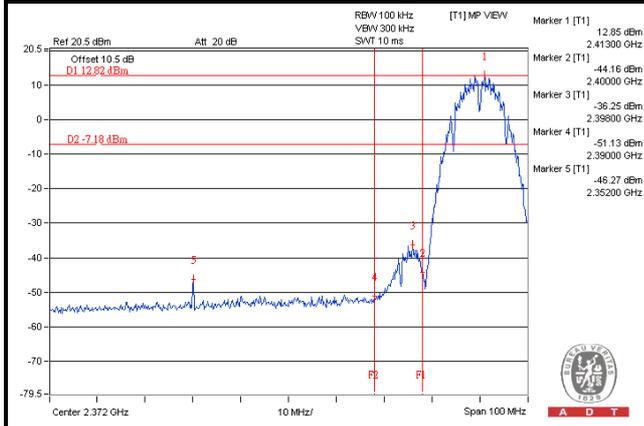


CH 11 Band edge


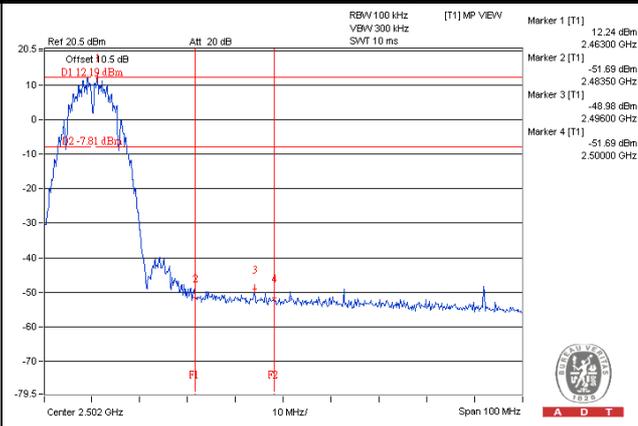


802.11g CHAIN 0



CH 1

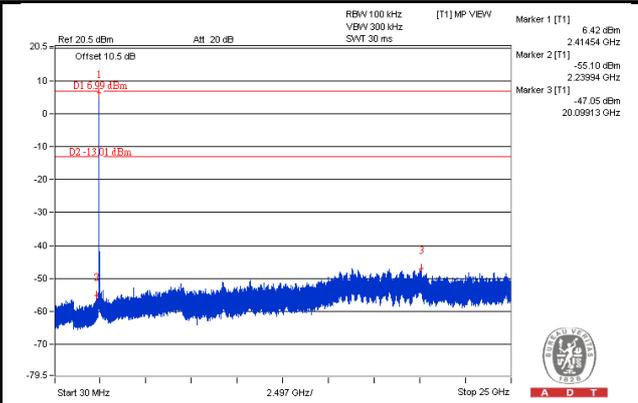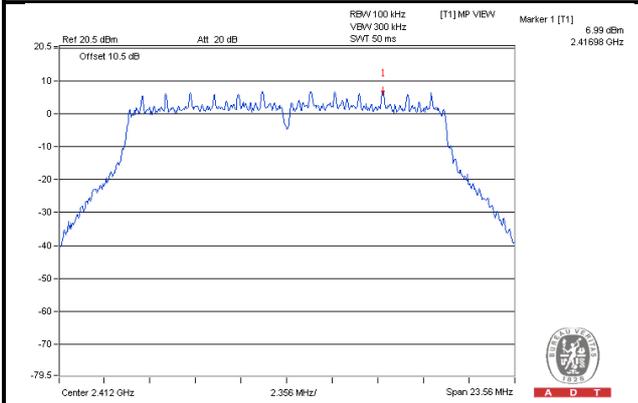


CH 6

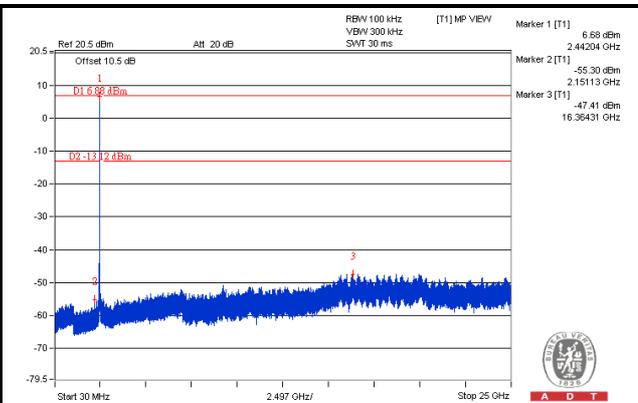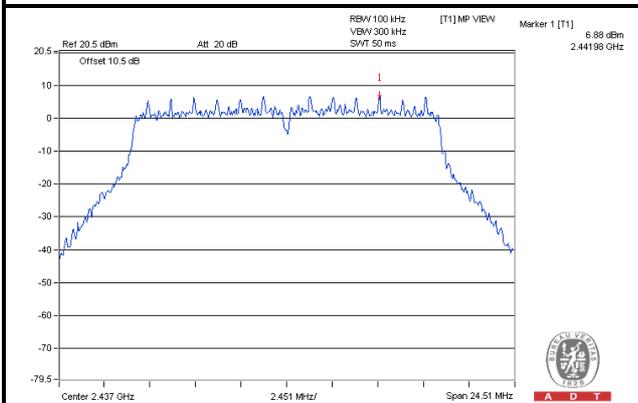


CH 11

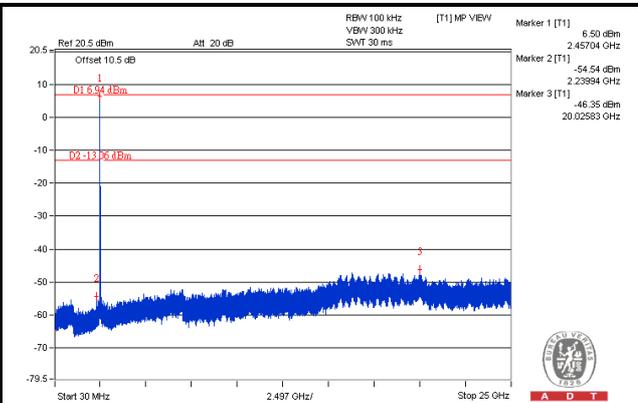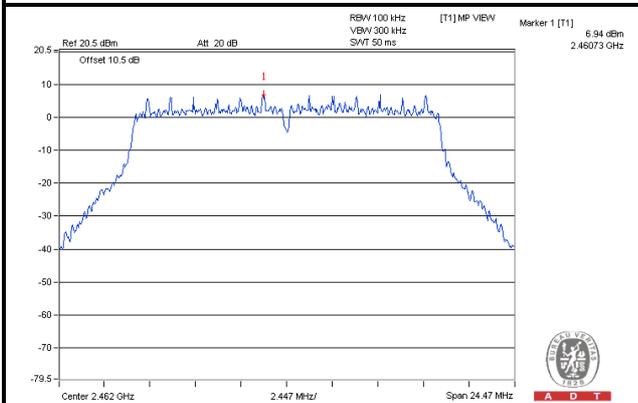

CH 1 Band edge


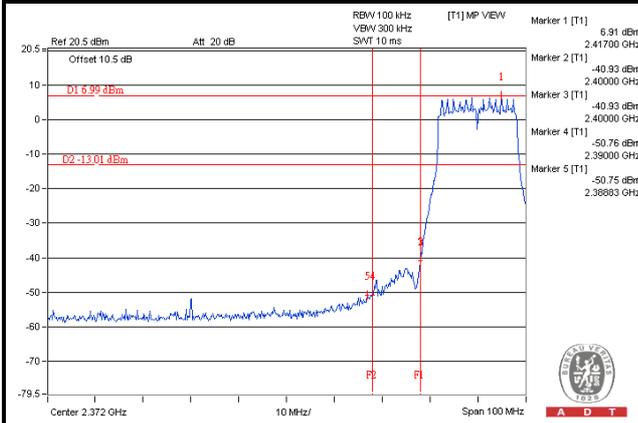


CH 11 Band edge


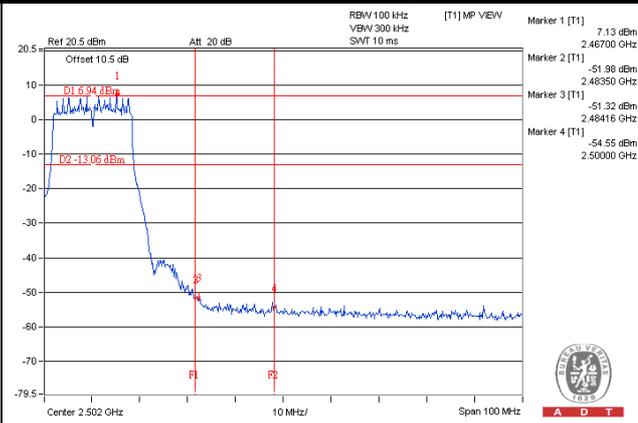


CHAIN 1



CH 1

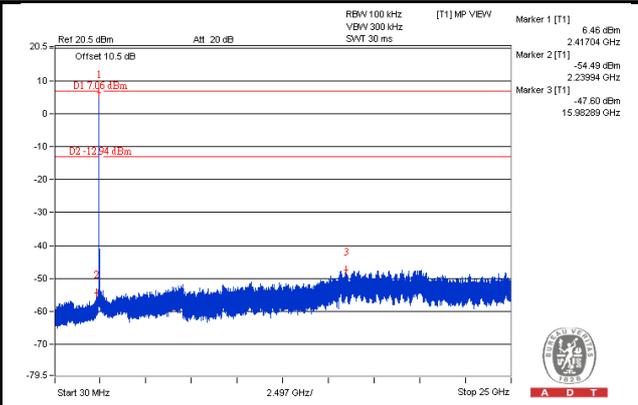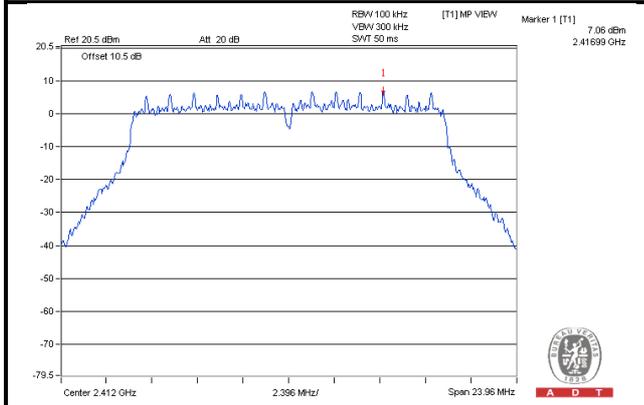


CH 6

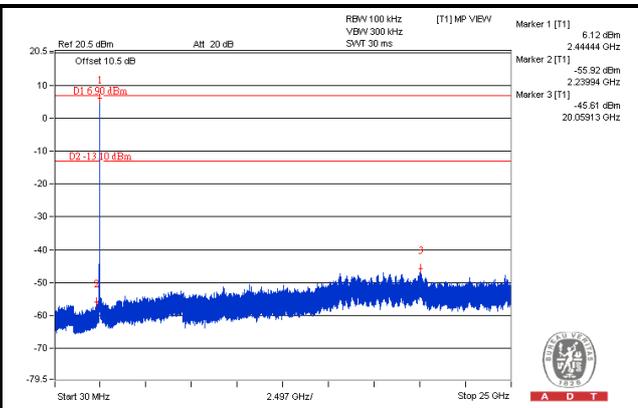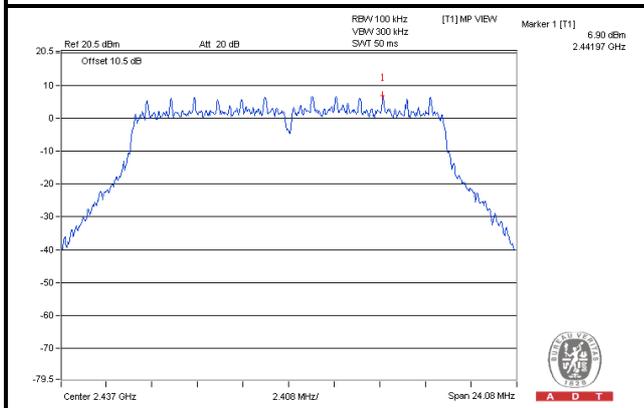


CH 11

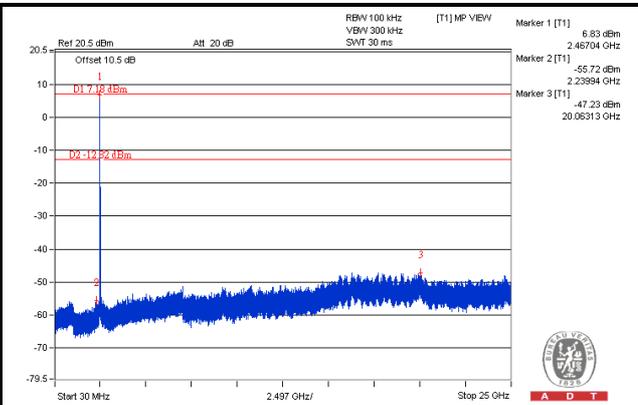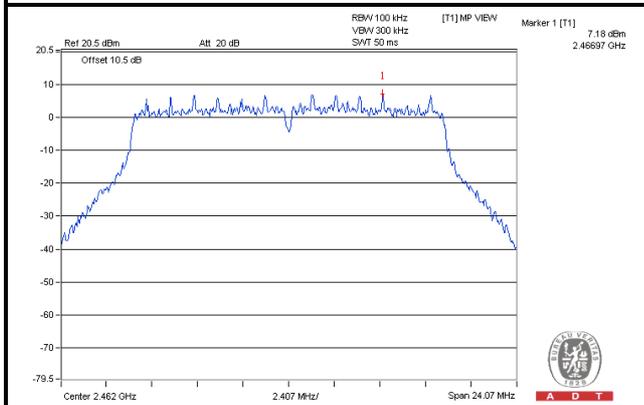

CH 1 Band edge


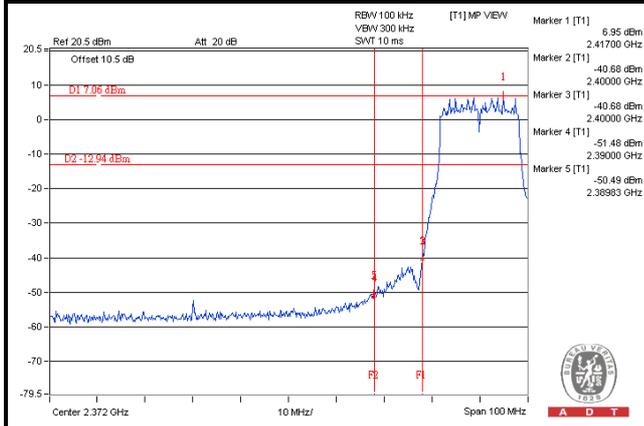


CH 11 Band edge


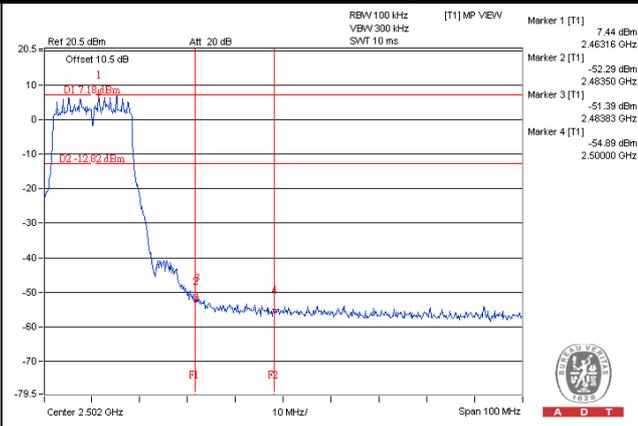


CHAIN 2



CH 1

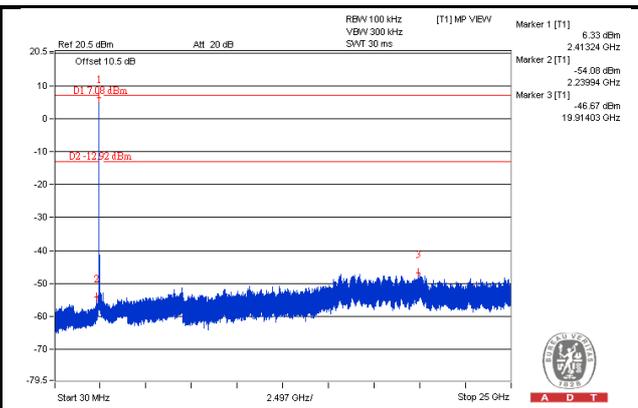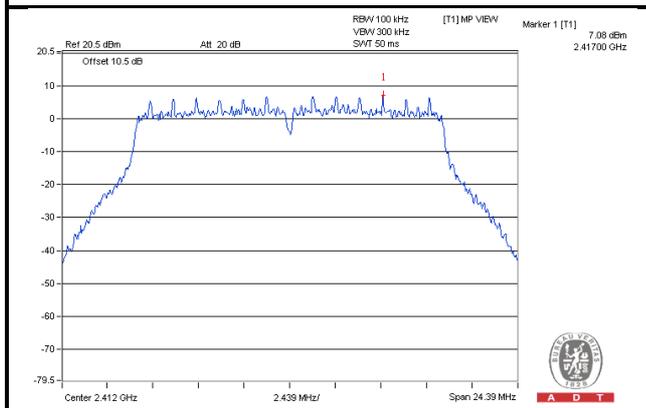


CH 6

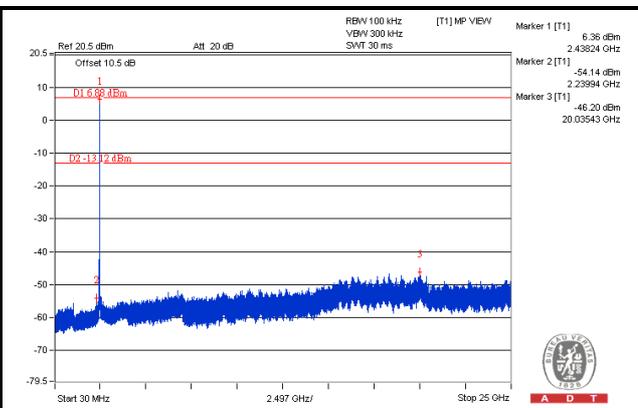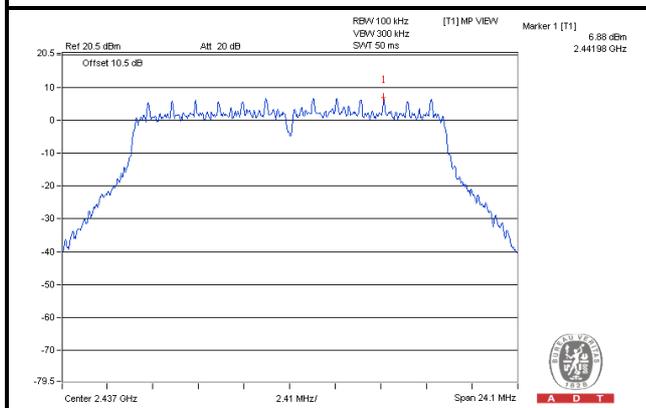


CH 11

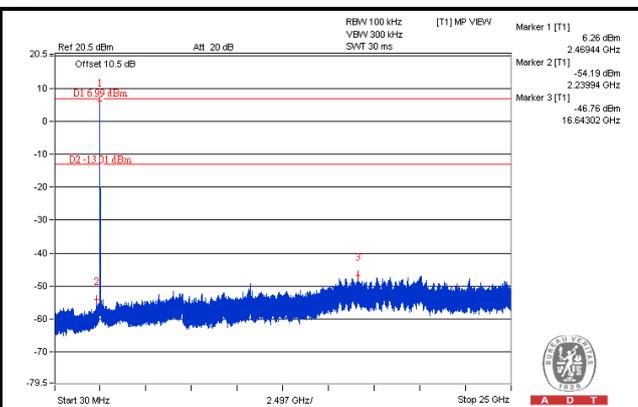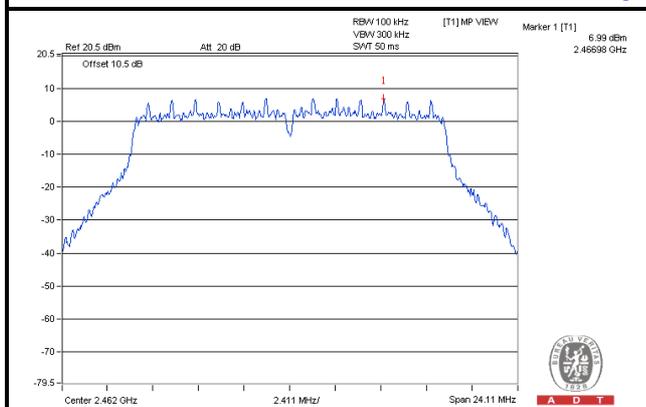

CH 1 Band edge


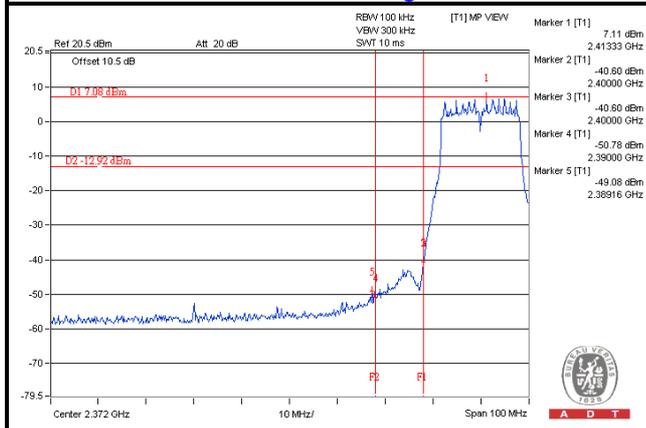


CH 11 Band edge


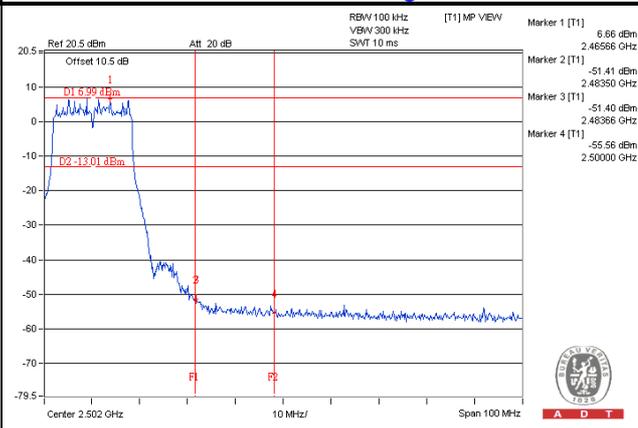


CHAIN 3



CH 1

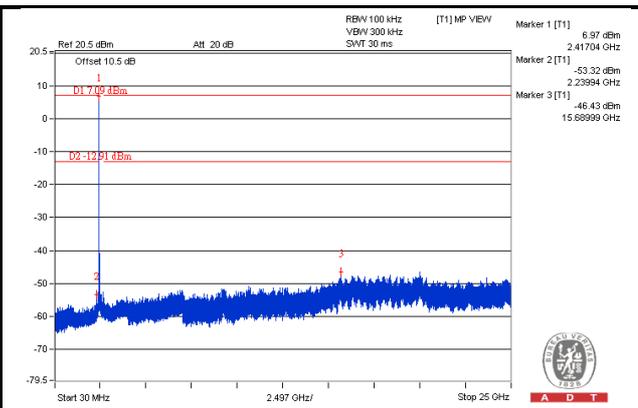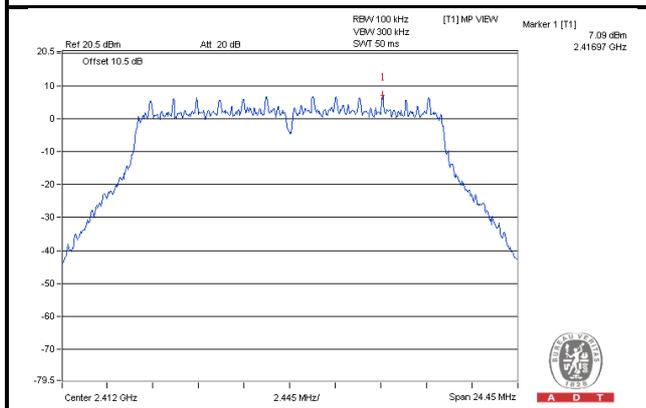


CH 6

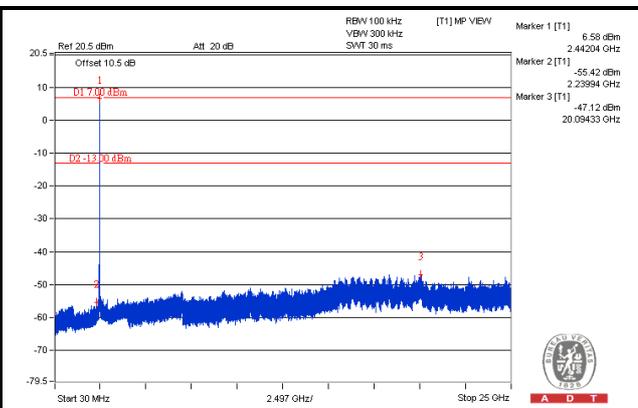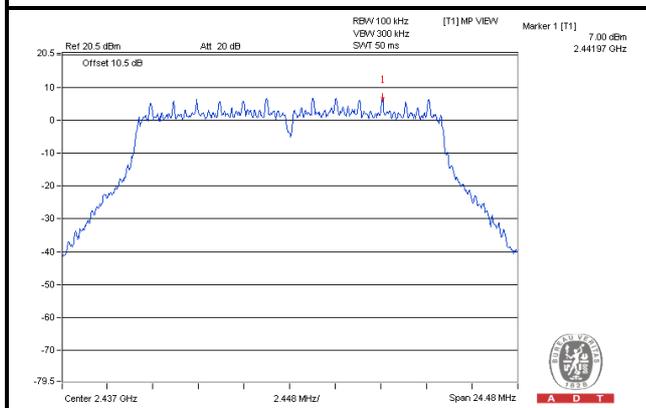


CH 11

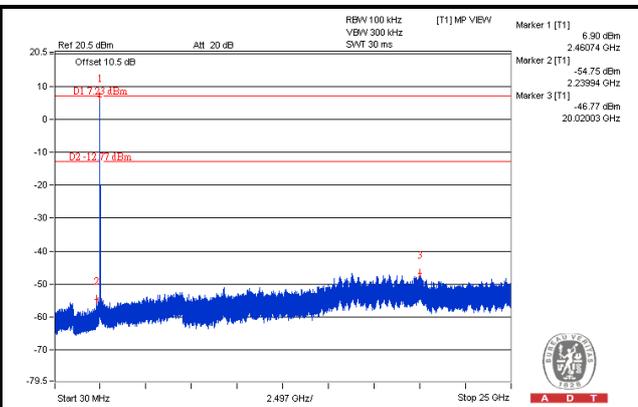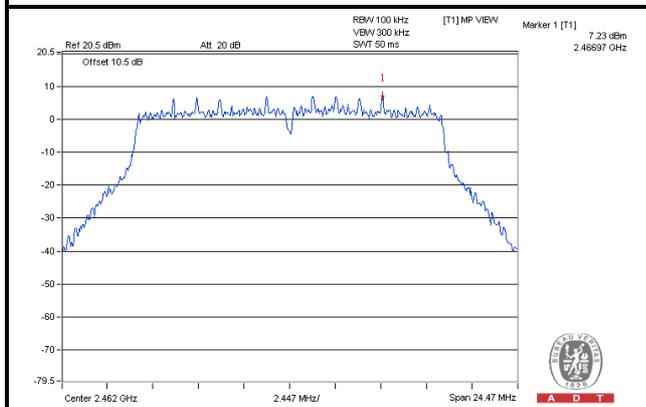

CH 1 Band edge


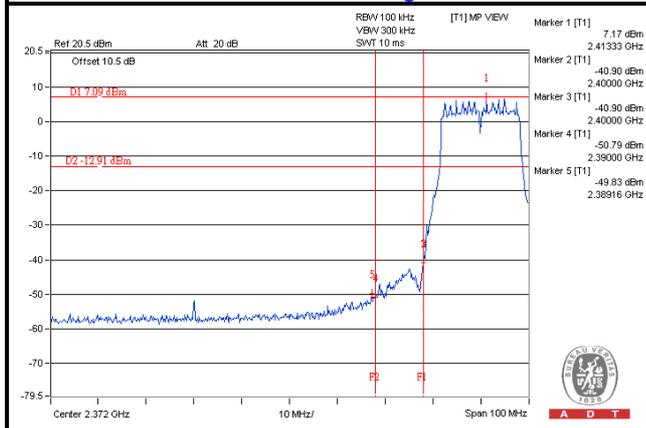


CH 11 Band edge


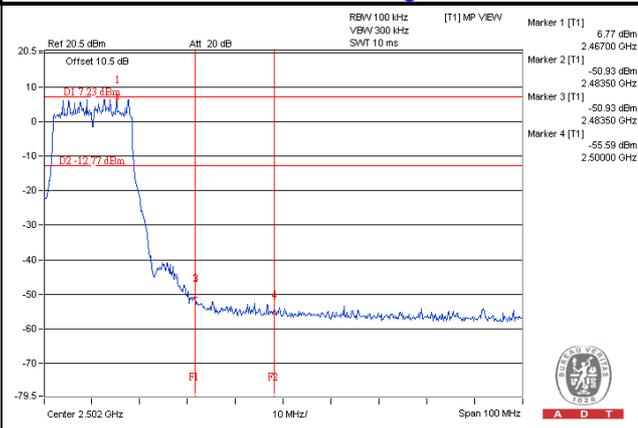


802.11n (20MHz): CHAIN 0



CH 1

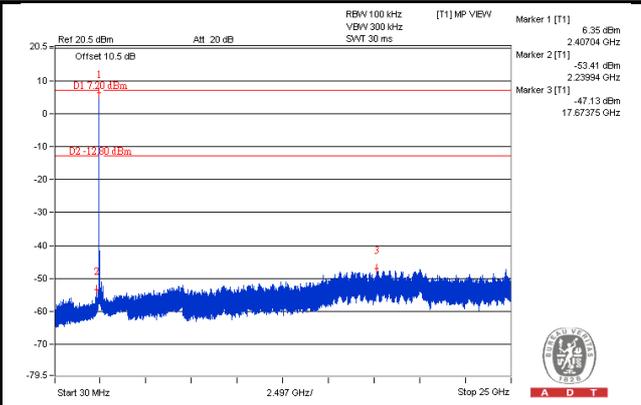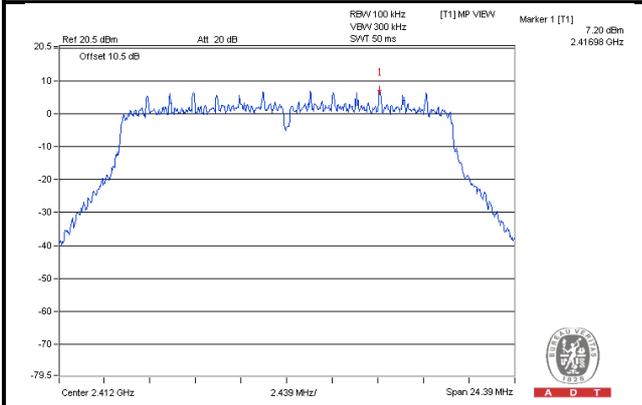


CH 6

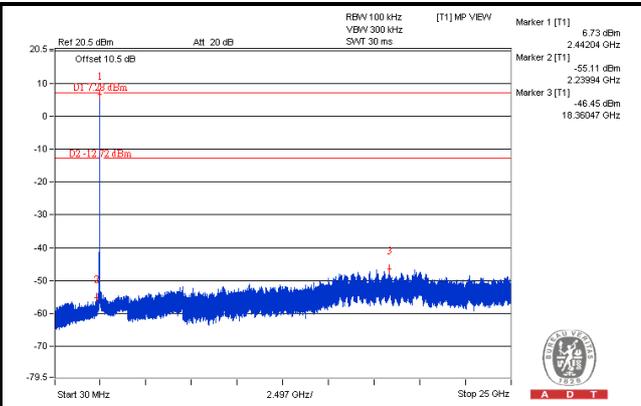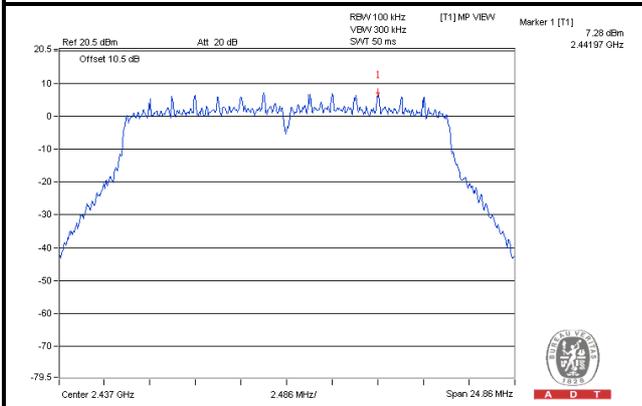


CH 11

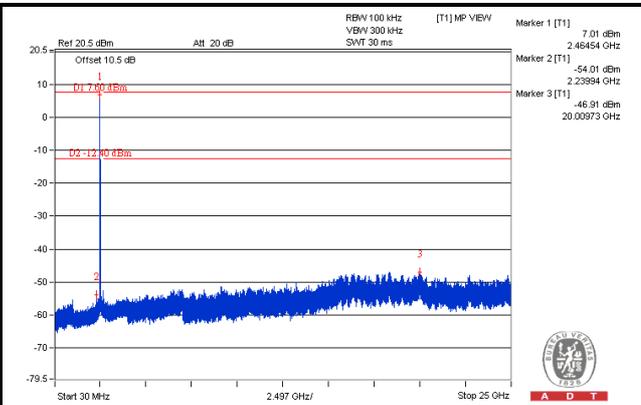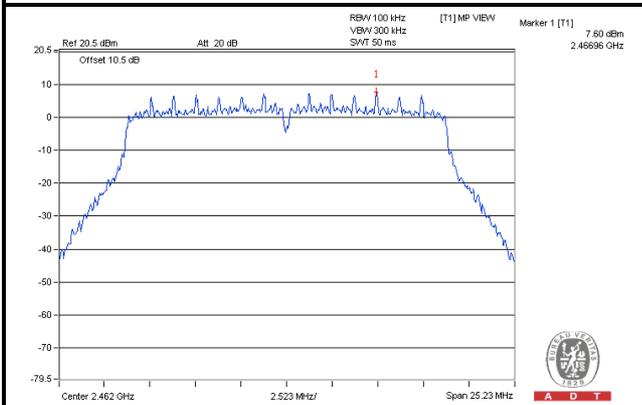

CH 1 Band edge


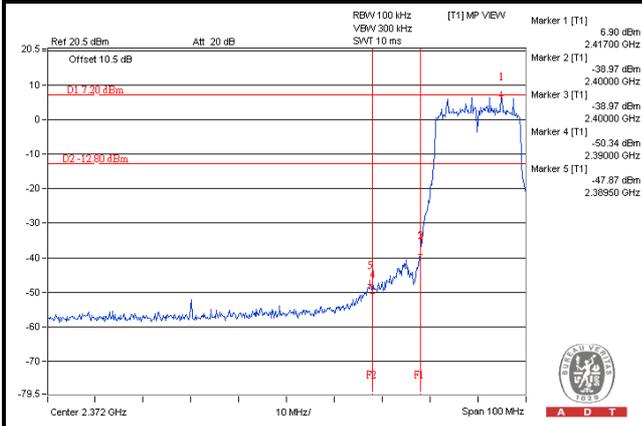


CH 11 Band edge


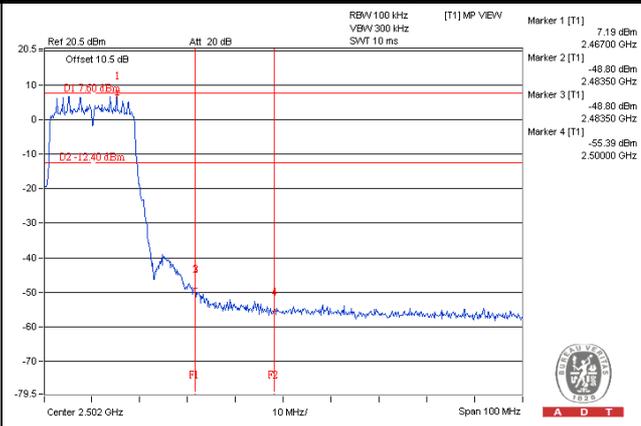


CHAIN 1



CH 1

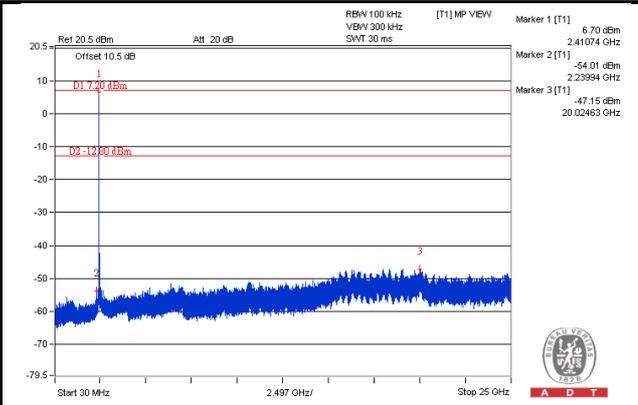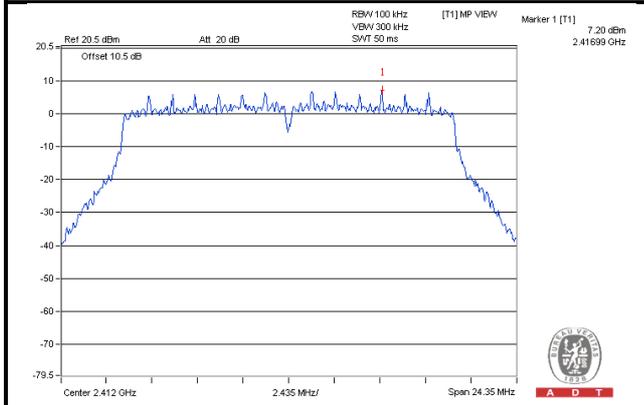


CH 6

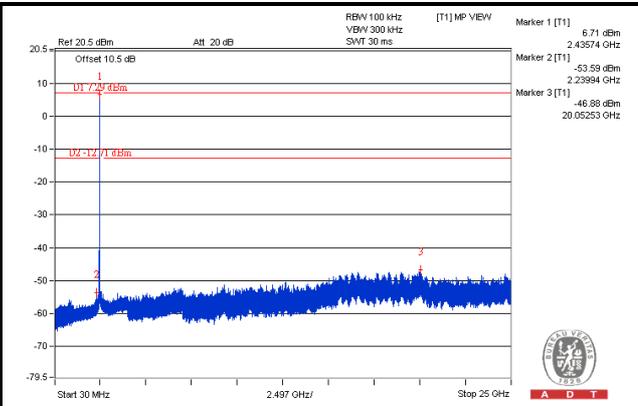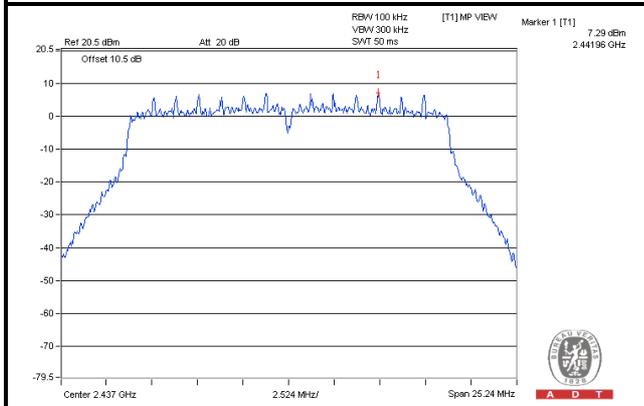


CH 11

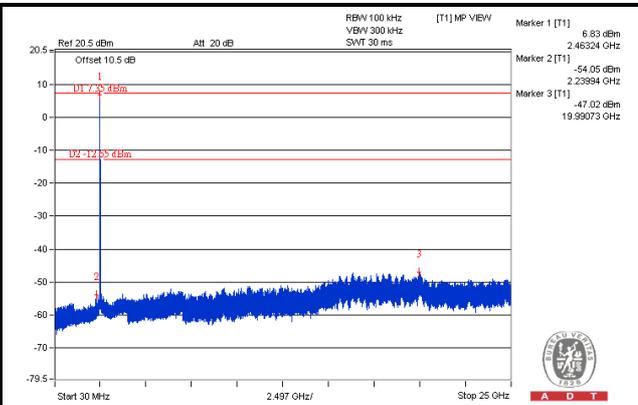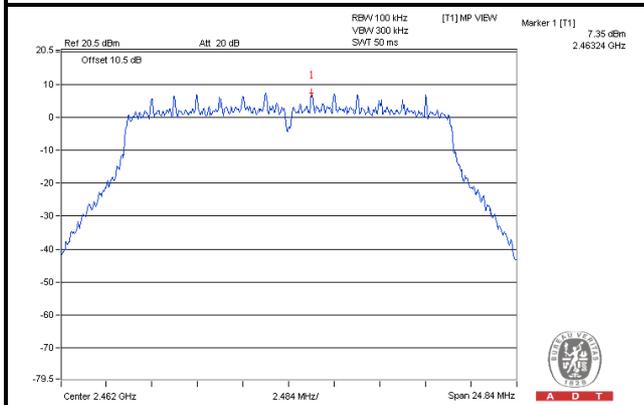

CH 1 Band edge


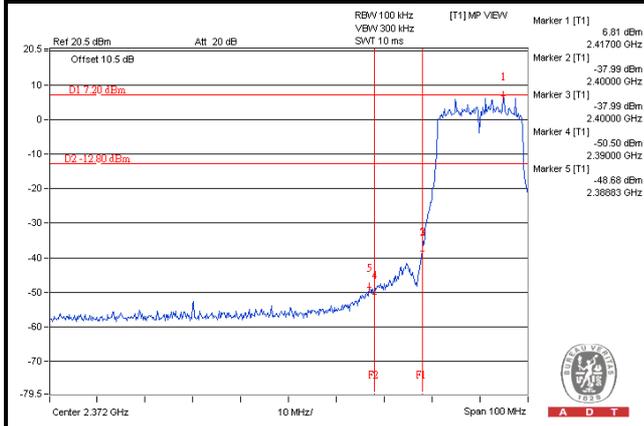


CH 11 Band edge


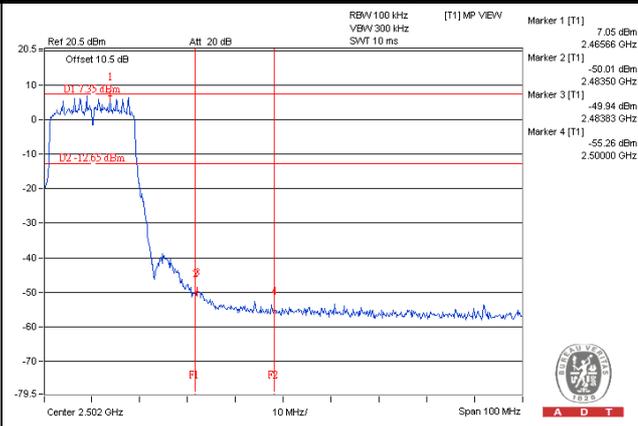


CHAIN 2



CH 1

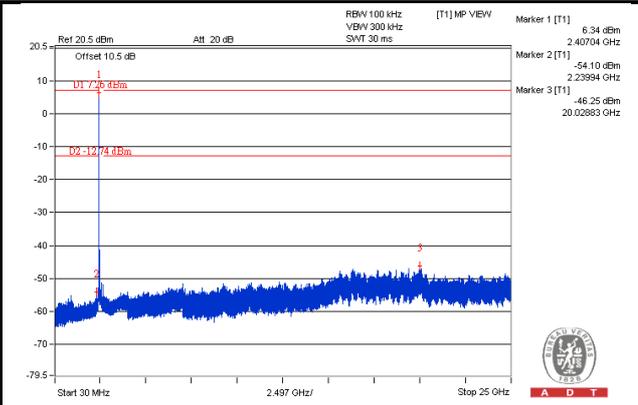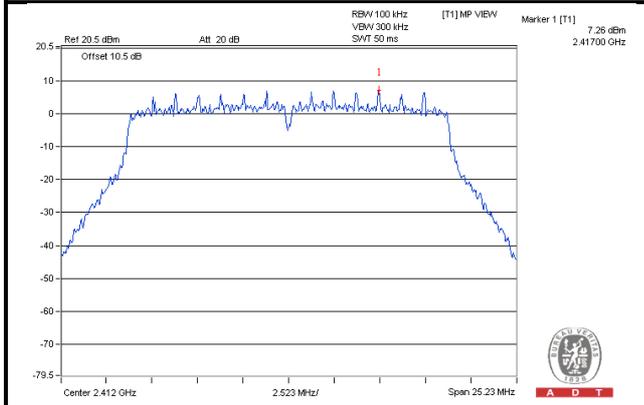


CH 6

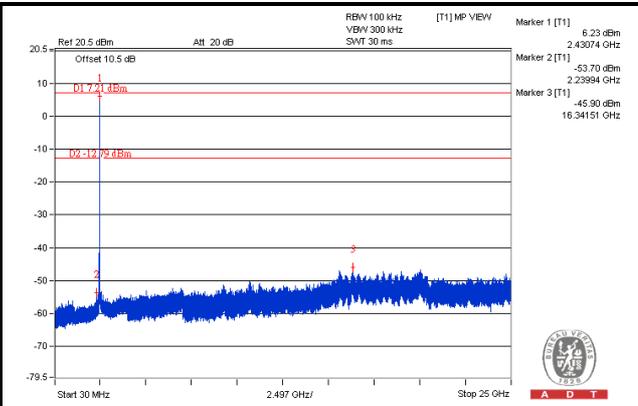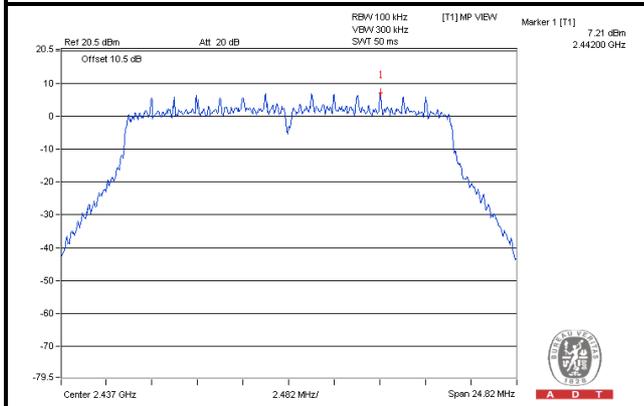


CH 11

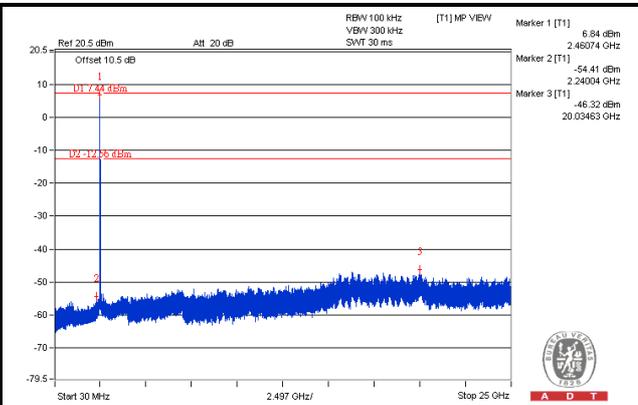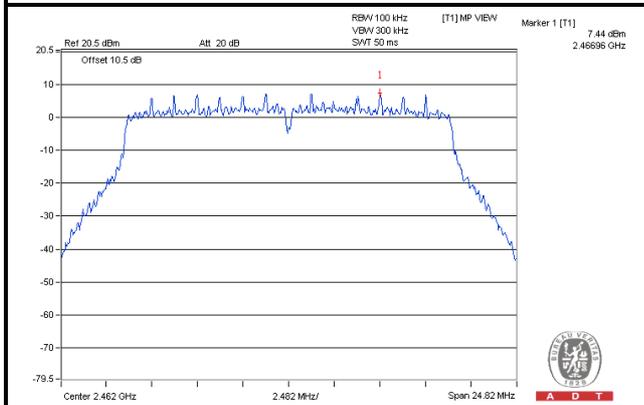

CH 1 Band edge


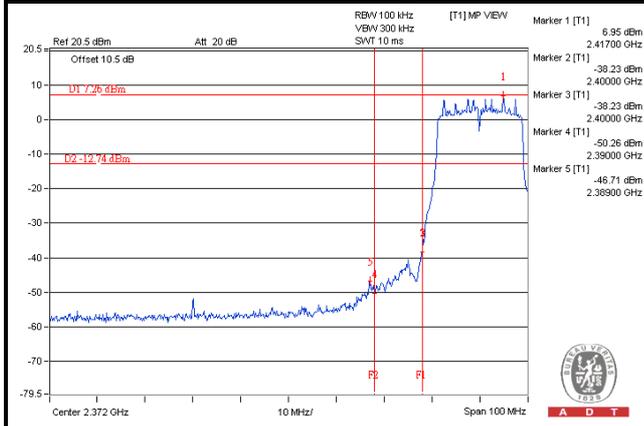


CH 11 Band edge


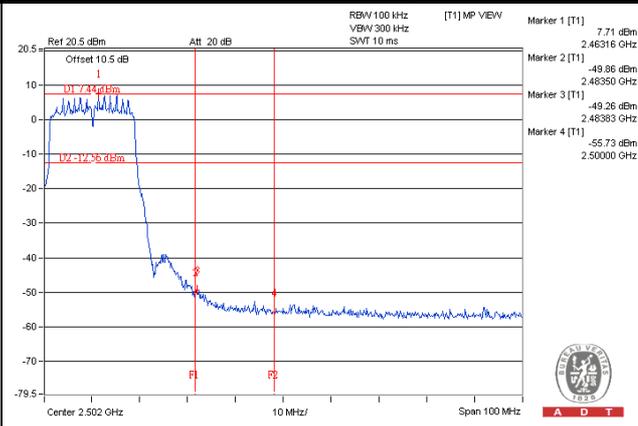


CHAIN 3



CH 1

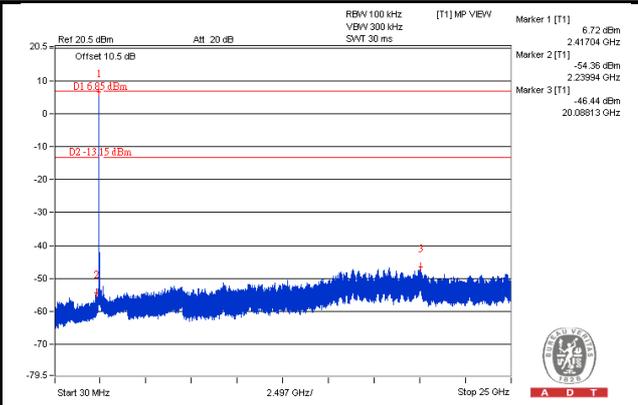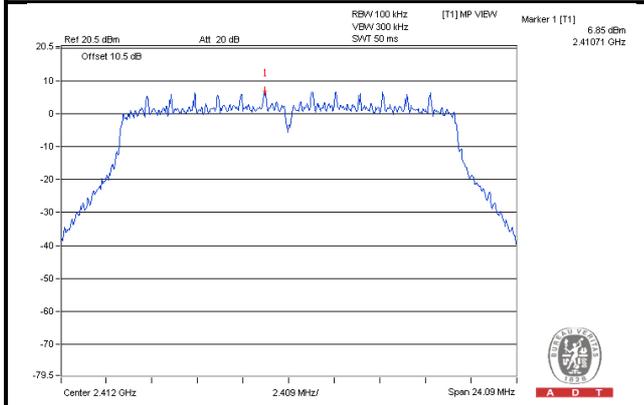


CH 6

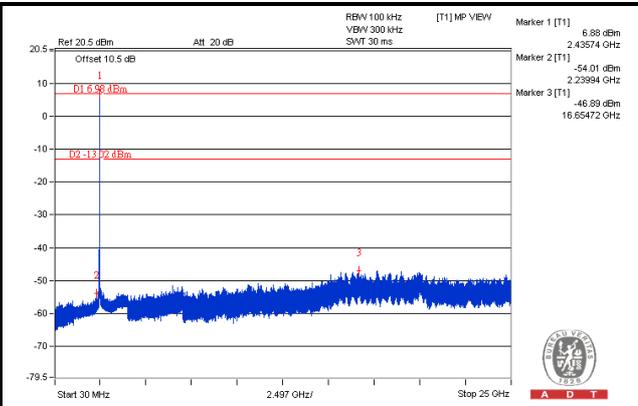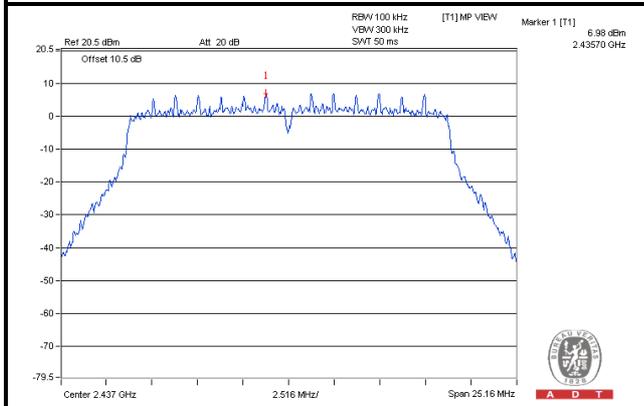


CH 11

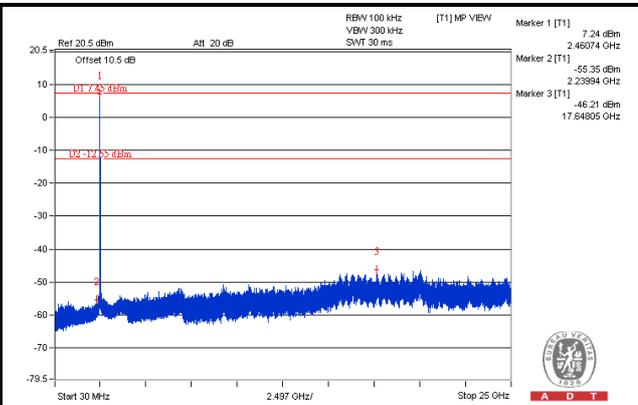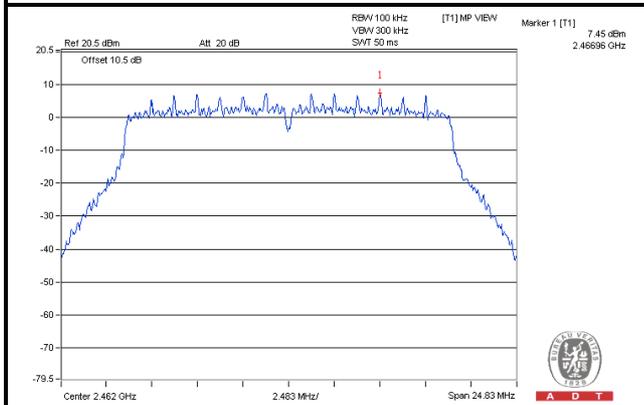

CH 1 Band edge


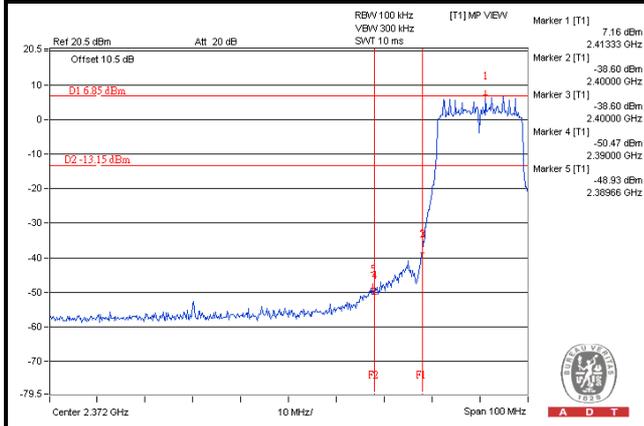


CH 11 Band edge


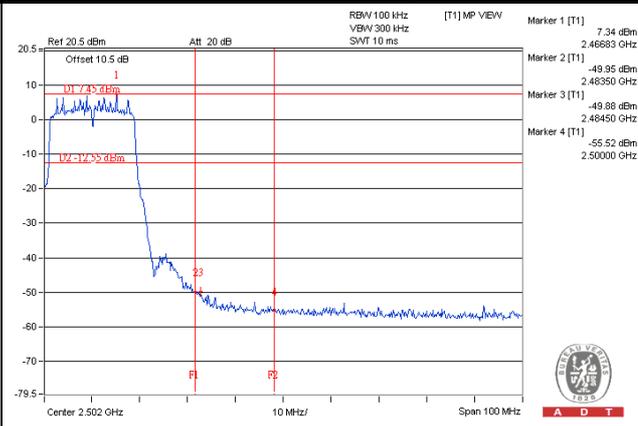


802.11n (40MHz): CHAIN 0



CH 3

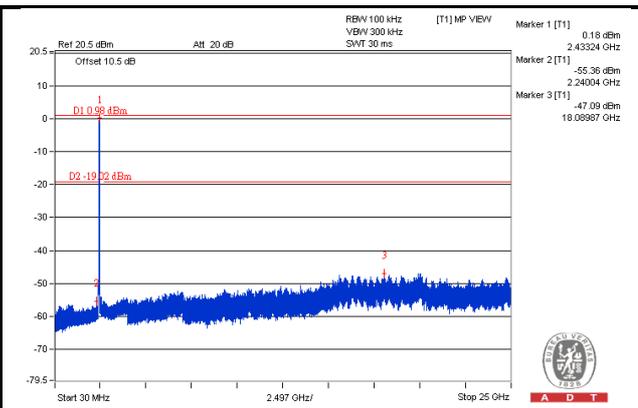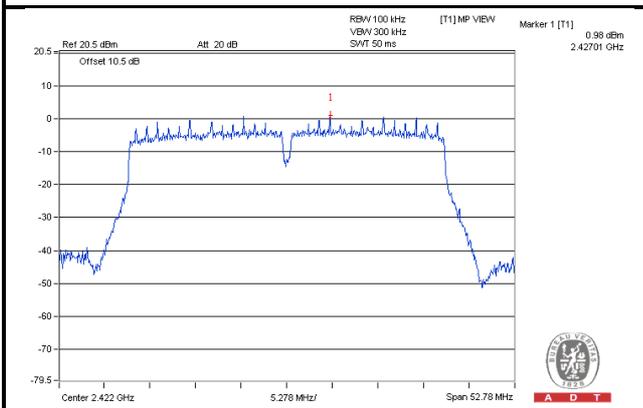


CH 6

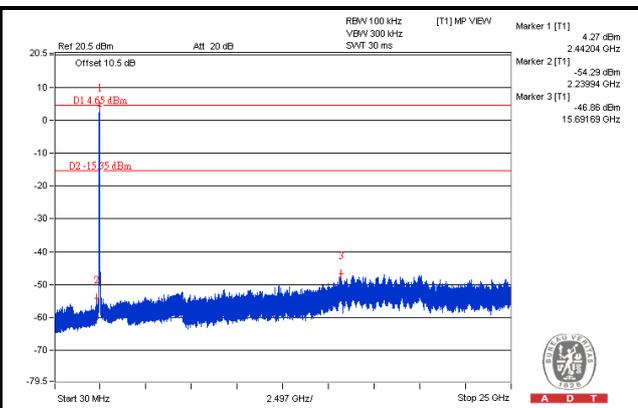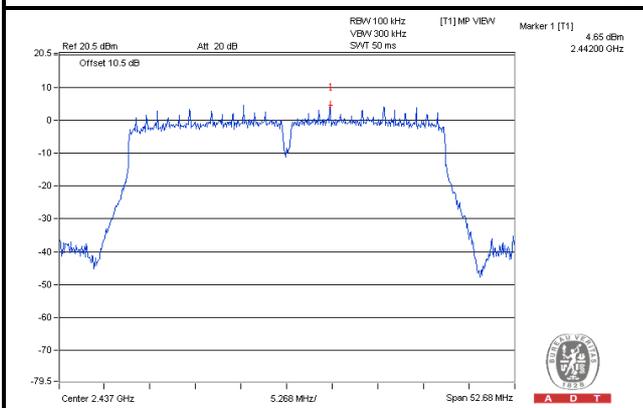


CH 9

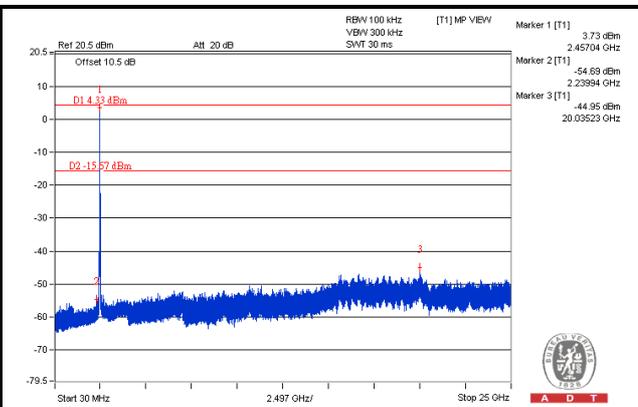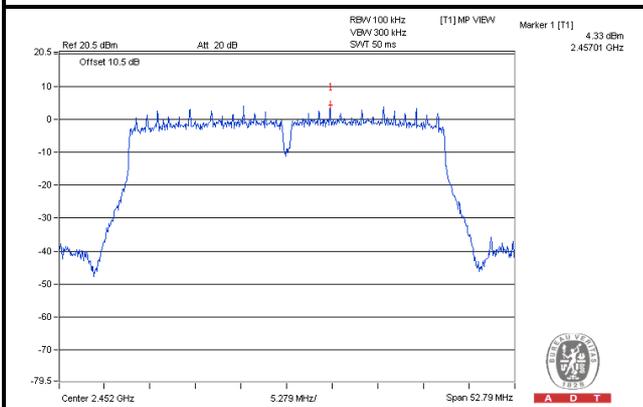

CH 3 Band edge


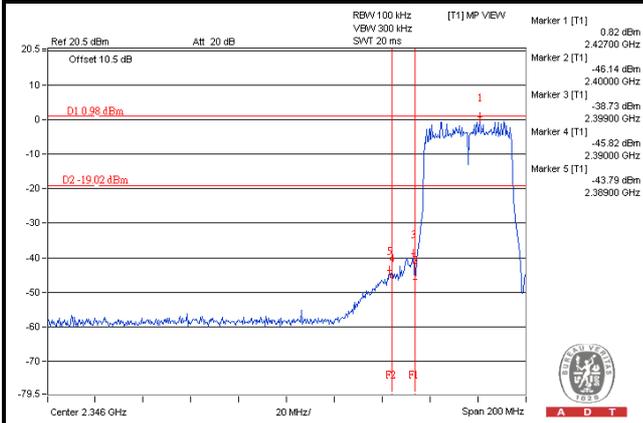


CH 9 Band edge


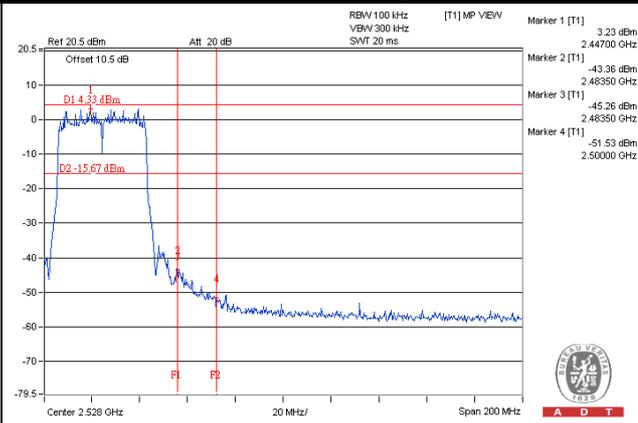


CHAIN 1



CH 3

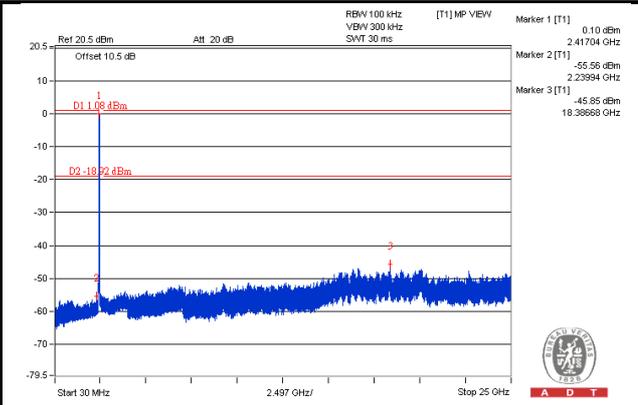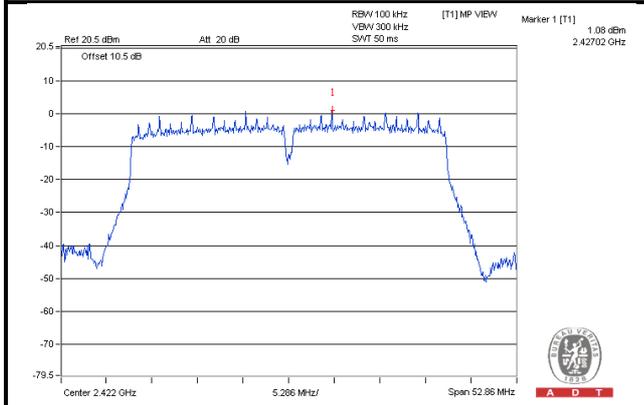


CH 6

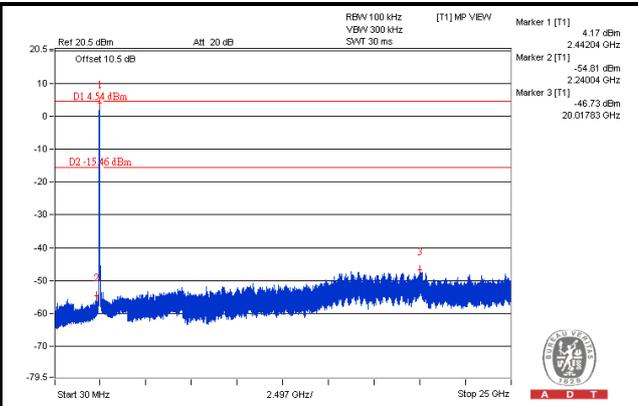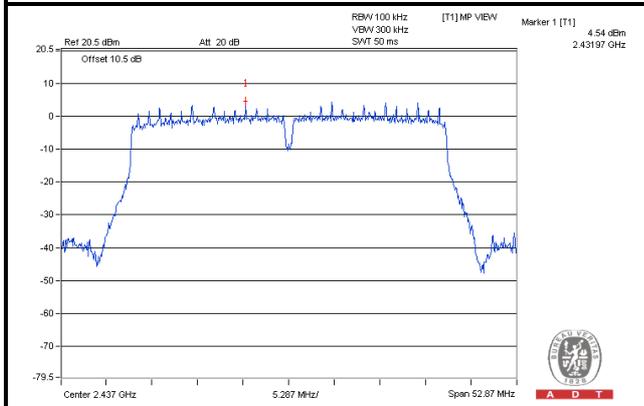


CH 9

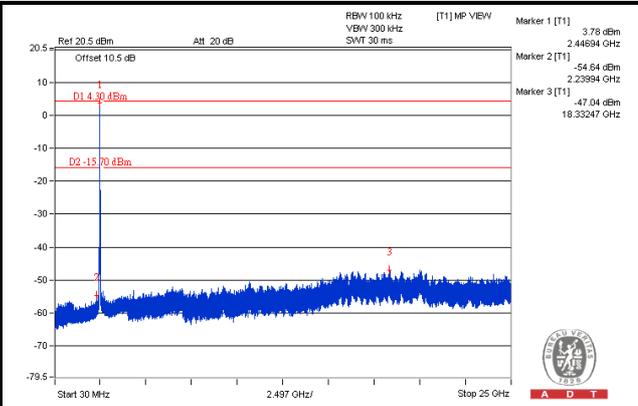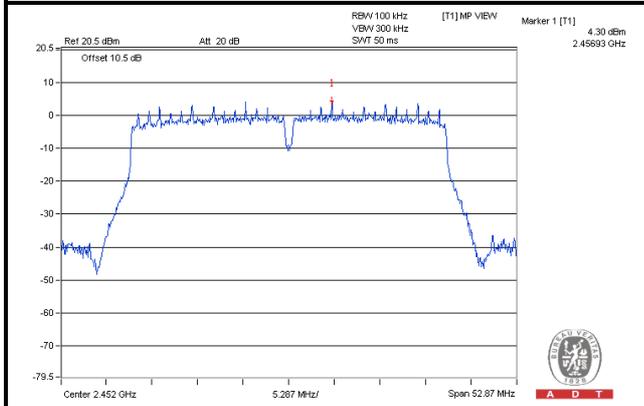

CH 3 Band edge


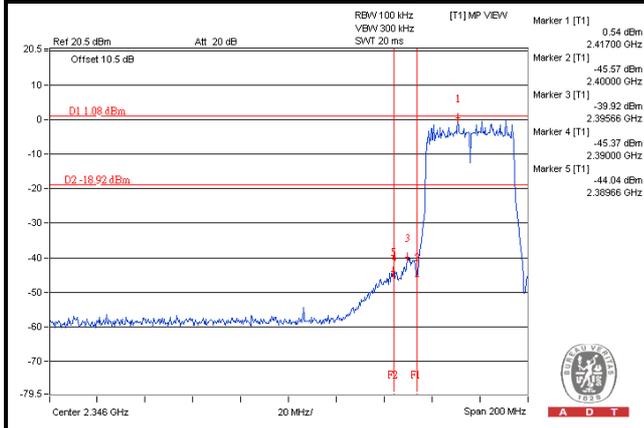


CH 9 Band edge


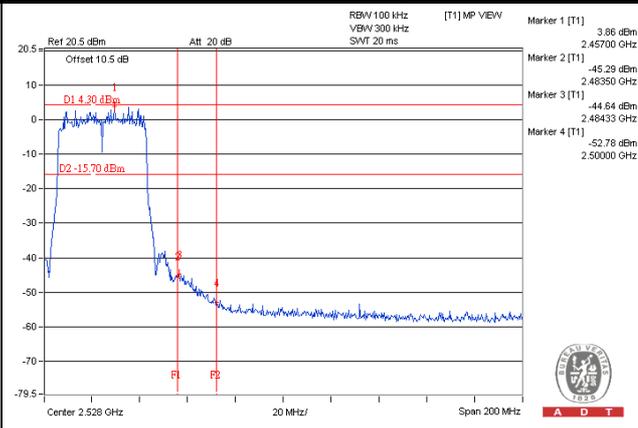


CHAIN 2



CH 3

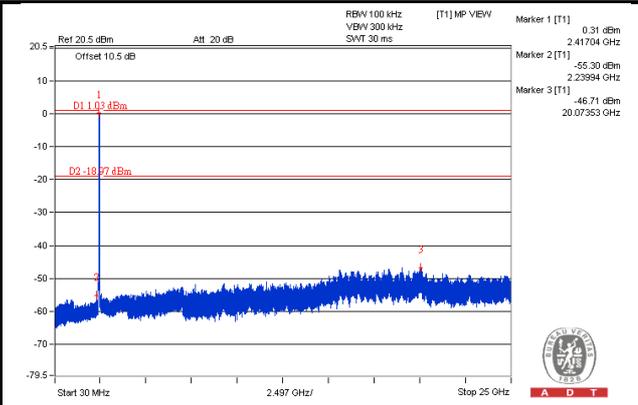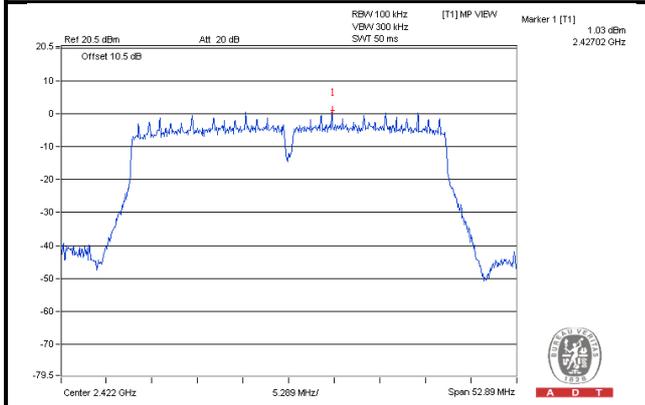


CH 6

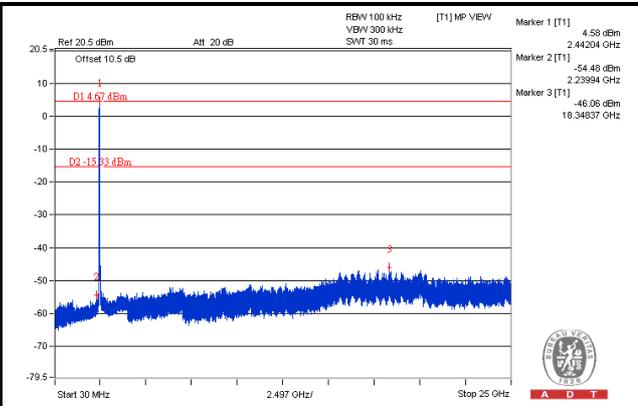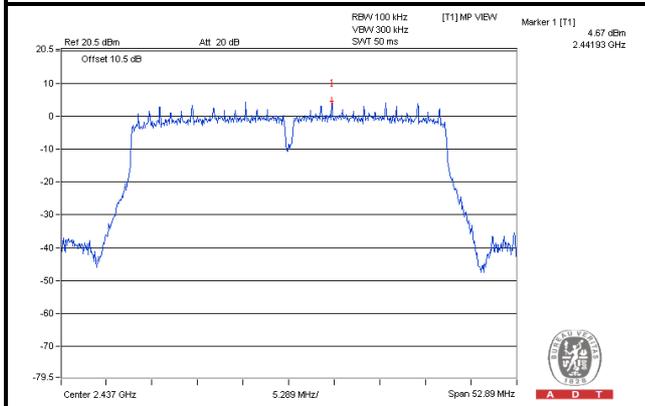


CH 9

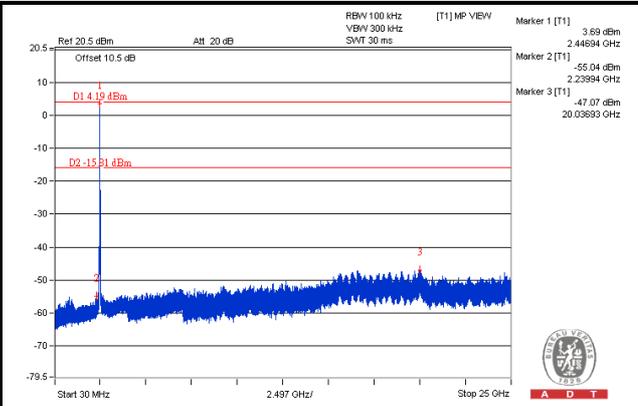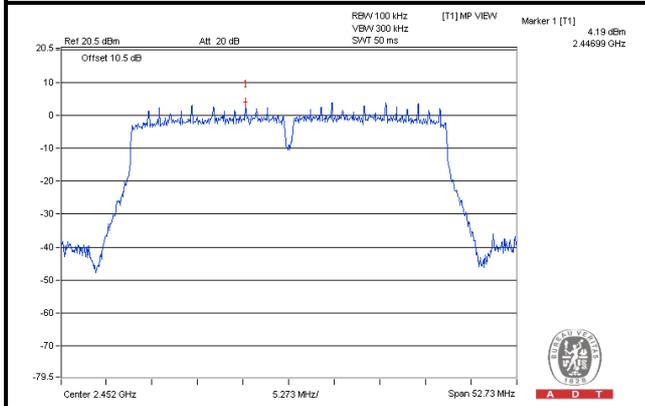

CH 3 Band edge


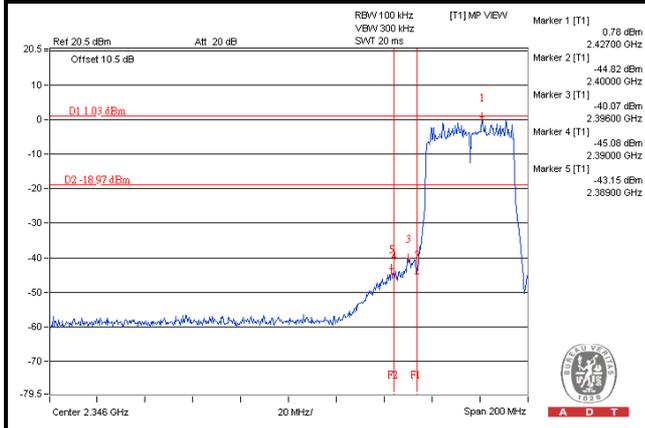


CH 9 Band edge


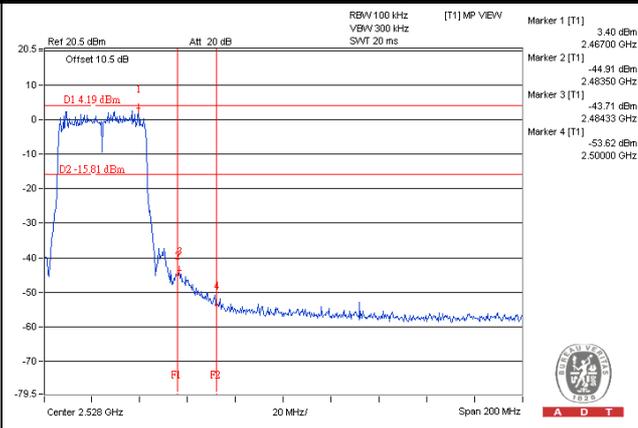


CHAIN 3



CH 3

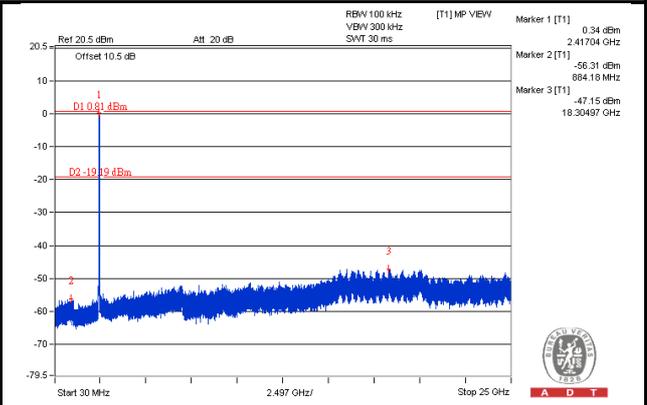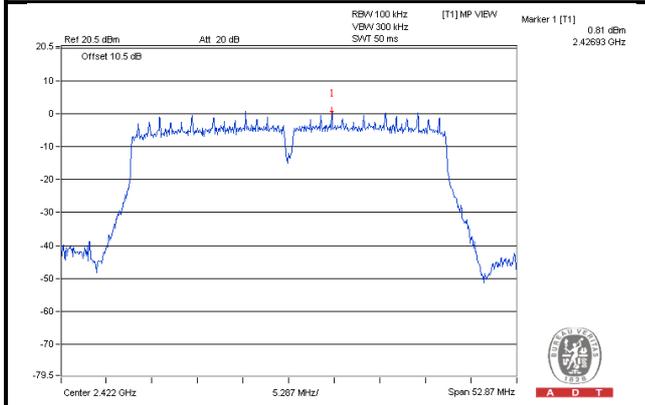


CH 6

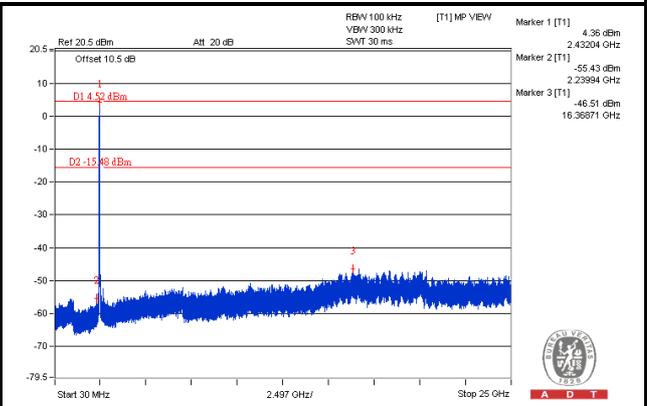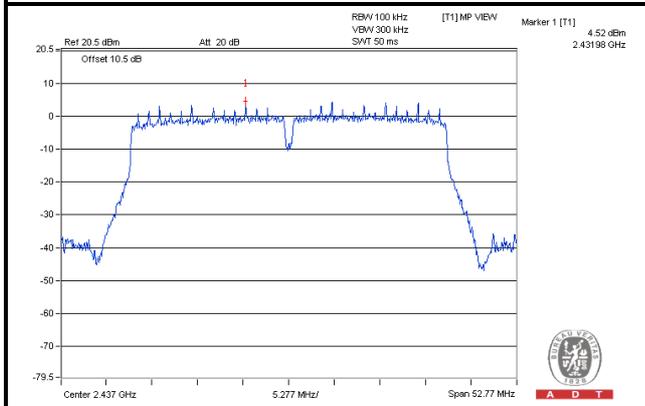


CH 9

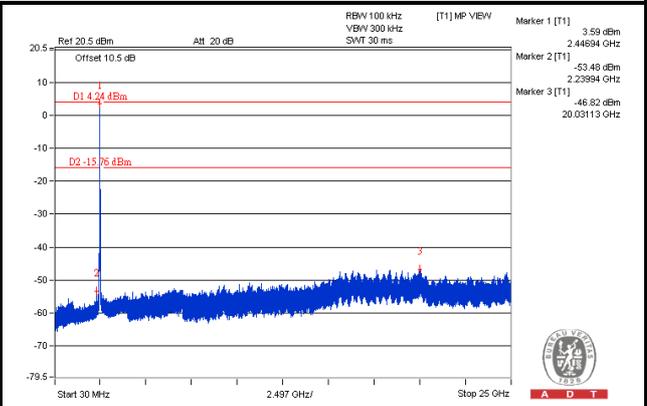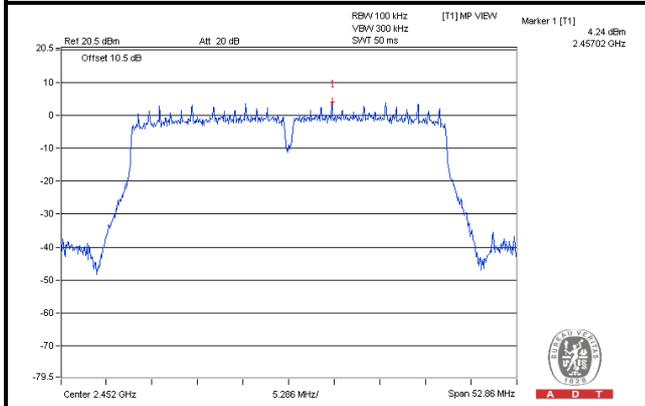

CH 3 Band edge

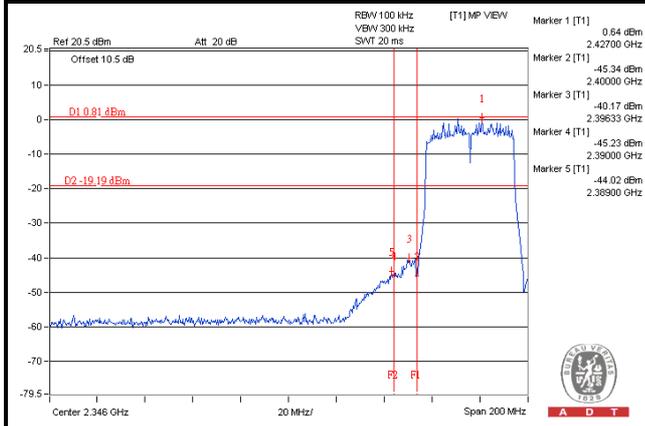

CH 9 Band edge

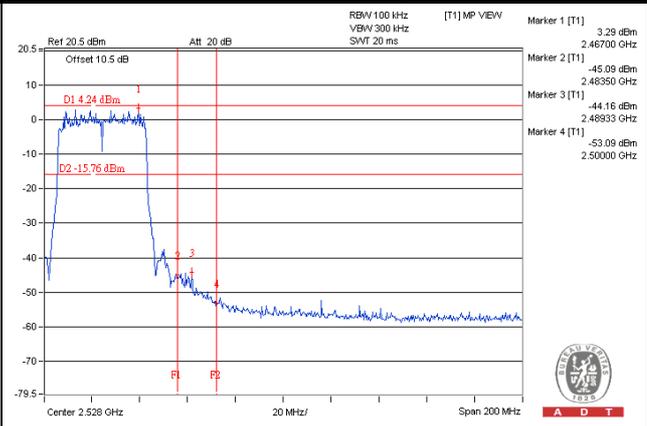

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---