


Appendix C. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	24°C	Humidity	55%
Test Engineer	David Tseng	Configurations	2.4G + 5G

Horizontal

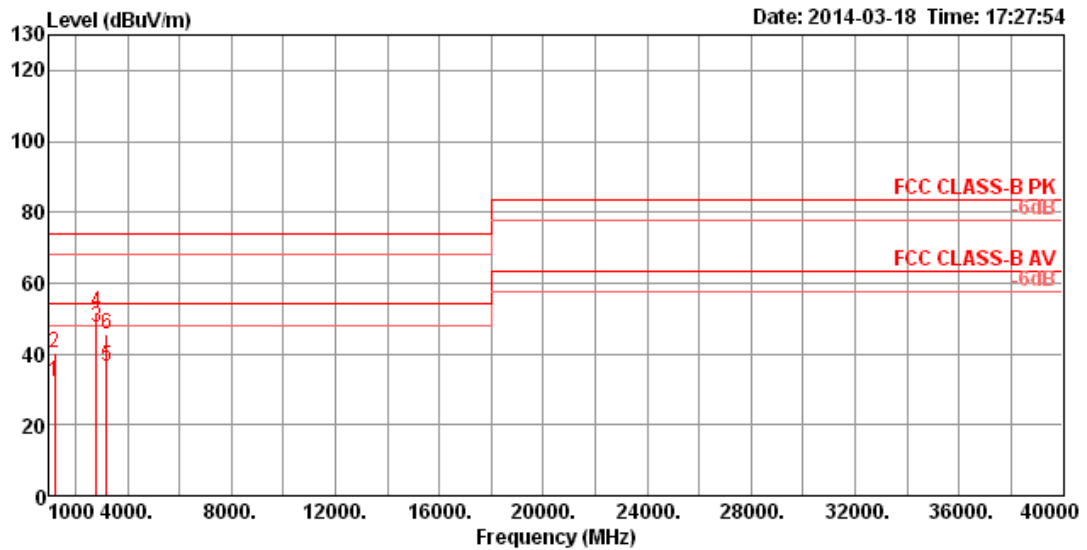

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1200.06	32.35	54.00	-21.65	43.14	2.52	24.46	37.77	101	188	HORIZONTAL	Average
2	1200.28	40.44	74.00	-33.56	51.23	2.52	24.46	37.77	101	188	HORIZONTAL	Peak
3	2800.07	47.39	54.00	-6.61	50.24	3.98	28.96	35.79	102	143	HORIZONTAL	Average
4	2800.32	51.87	74.00	-22.13	54.72	3.98	28.96	35.79	102	143	HORIZONTAL	Peak
5	3200.09	36.37	54.00	-17.63	38.06	4.35	29.91	35.95	100	66	HORIZONTAL	Average
6	3200.39	45.41	74.00	-28.59	47.10	4.35	29.91	35.95	100	66	HORIZONTAL	Peak

Vertical

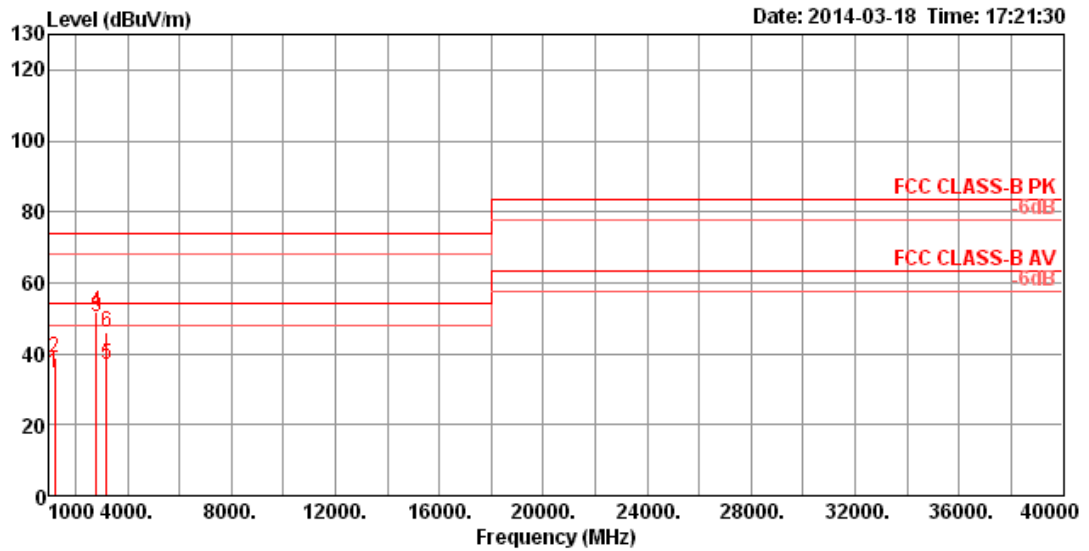

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1200.06	34.32	54.00	-19.68	45.11	2.52	24.46	37.77	100	210	VERTICAL Average
2	1200.11	38.97	74.00	-35.03	49.76	2.52	24.46	37.77	100	210	VERTICAL Peak
3	2800.08	50.15	54.00	-3.85	53.00	3.98	28.96	35.79	122	353	VERTICAL Average
4	2800.08	52.00	74.00	-22.00	54.85	3.98	28.96	35.79	122	353	VERTICAL Peak
5	3200.06	37.08	54.00	-16.92	38.77	4.35	29.91	35.95	101	336	VERTICAL Average
6	3200.16	46.28	74.00	-27.72	47.97	4.35	29.91	35.95	101	336	VERTICAL Peak