



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

Applicant's company	Linksys LLC
Applicant Address	121 Theory Drive, Irvine, CA 92617, USA
FCC ID	Q87-RE6500
Manufacturer's company	U-MEDIA Communications, Inc.
Manufacturer Address	9F, No. 1, Jin-Shan 7th St., Hsinchu 300, Taiwan

Product Name	Linksys AC1200 MAX Wi-Fi Range Extender
Brand Name	LINKSYS
Model No.	RE6500
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Received Date	Feb. 19, 2016
Final Test Date	May 03, 2016
Submission Type	Class II Change

### Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a/ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01r02, KDB662911 D01 v02r01, KDB644545 D03 v01.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.





## Table of Contents

<b>1. VERIFICATION OF COMPLIANCE</b> .....	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT</b> .....	<b>2</b>
<b>3. GENERAL INFORMATION</b> .....	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies .....	6
3.5. Table for Test Modes.....	7
3.6. Table for Testing Locations.....	8
3.7. Table for Class II Change .....	9
3.8. Table for Supporting Units .....	10
3.9. Table for Parameters of Test Software Setting .....	11
3.10. EUT Operation during Test .....	11
3.11. Duty Cycle.....	11
3.12. Test Configurations .....	12
<b>4. TEST RESULT</b> .....	<b>15</b>
4.1. AC Power Line Conducted Emissions Measurement.....	15
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	19
4.3. 6dB Spectrum Bandwidth Measurement .....	30
4.4. Maximum Conducted Output Power Measurement.....	34
4.5. Power Spectral Density Measurement .....	37
4.6. Radiated Emissions Measurement .....	46
4.7. Band Edge Emissions Measurement .....	71
4.8. Frequency Stability Measurement .....	80
4.9. Antenna Requirements .....	87
<b>5. LIST OF MEASURING EQUIPMENTS</b> .....	<b>88</b>
<b>6. MEASUREMENT UNCERTAINTY</b> .....	<b>89</b>
<b>APPENDIX A. TEST PHOTOS</b> .....	<b>A1 ~ A4</b>



## History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR4N1172-37AB	Rev. 01	Initial issue of report	Jun. 22, 2016



## 1. VERIFICATION OF COMPLIANCE

Product Name : Linksys AC1200 MAX Wi-Fi Range Extender  
Brand Name : LINKSYS  
Model No. : RE6500  
Applicant : Linksys LLC  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Feb. 19, 2016 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Sam Chen  
SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	12.58 dB
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.3	15.407(e)	6dB Spectrum Bandwidth	Complies	-
4.4	15.407(a)	Maximum Conducted Output Power	Complies	8.55 dB
4.5	15.407(a)	Power Spectral Density	Complies	8.84 dB
4.6	15.407(b)	Radiated Emissions	Complies	0.41 dB
4.7	15.407(b)	Band Edge Emissions	Complies	0.05 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

### 3. GENERAL INFORMATION

#### 3.1. Product Details

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	IEEE 802.11a: OFDM IEEE 802.11n/ac: see the below table
Data Modulation	IEEE 802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	IEEE 802.11a: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n/ac: see the below table
Frequency Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Channel Number	9 for 20MHz bandwidth ; 4 for 40MHz bandwidth 2 for 80MHz bandwidth
Channel Band Width (99%)	Band 1: IEEE 802.11a: 27.70 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 27.61 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 38.49 MHz IEEE 802.11ac MCS0/Nss1 (VHT80): 74.96 MHz Band 4: IEEE 802.11a: 35.86 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 30.56 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 58.61 MHz IEEE 802.11ac MCS0/Nss1 (VHT80): 75.25 MHz
Maximum Conducted Output Power	Band 1: IEEE 802.11a: 21.45 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 21.19 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 18.54 dBm IEEE 802.11ac MCS0/Nss1 (VHT80): 13.02 dBm Band 4: IEEE 802.11a: 21.32 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 21.01 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 21.12 dBm IEEE 802.11ac MCS0/Nss1 (VHT80): 13.52 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
Beamforming Function	<input type="checkbox"/> With beamforming	<input checked="" type="checkbox"/> Without beamforming
Operate Condition	<input checked="" type="checkbox"/> Indoor	<input type="checkbox"/> Outdoor

### Antenna and Band width

Antenna	Two (TX)		
	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

### IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	2	MCS 0-15
802.11n (HT40)	2	MCS 0-15
802.11ac (VHT20)	2	MCS 0-9/Nss1-2
802.11ac (VHT40)	2	MCS 0-9/Nss1-2
802.11ac (VHT80)	2	MCS 0-9/Nss1-2

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).  
Then EUT supports HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT supports VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:  
HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

## 3.2. Accessories


Power	Brand	Model	Rating
Adapter	Ktec	KSAS0121200100VU	INPUT: 100-240Vac, 50/60Hz, 0.4A OUTPUT: 12Vdc, 1.0A

### 3.3. Table for Filed Antenna

Ant.	Brand	Model No.	Antenna Type	Connector	Gain (dBi)		Cable Loss (dB)		True Gain (dBi)	
					2.4GHz	5GHz	2.4GHz	5GHz	2.4GHz	5GHz
1	INVAX	AN2450	Dipole Antenna	RP SMA	3.5	3.5	1.0	2.8	2.5	0.7
2	INVAX	AN2450	Dipole Antenna	RP SMA	3.5	3.5	2.8	1.0	0.7	2.5

Note: The EUT has two antennas.

Ant. 1 and Ant. 2 could transmit/receive simultaneously.

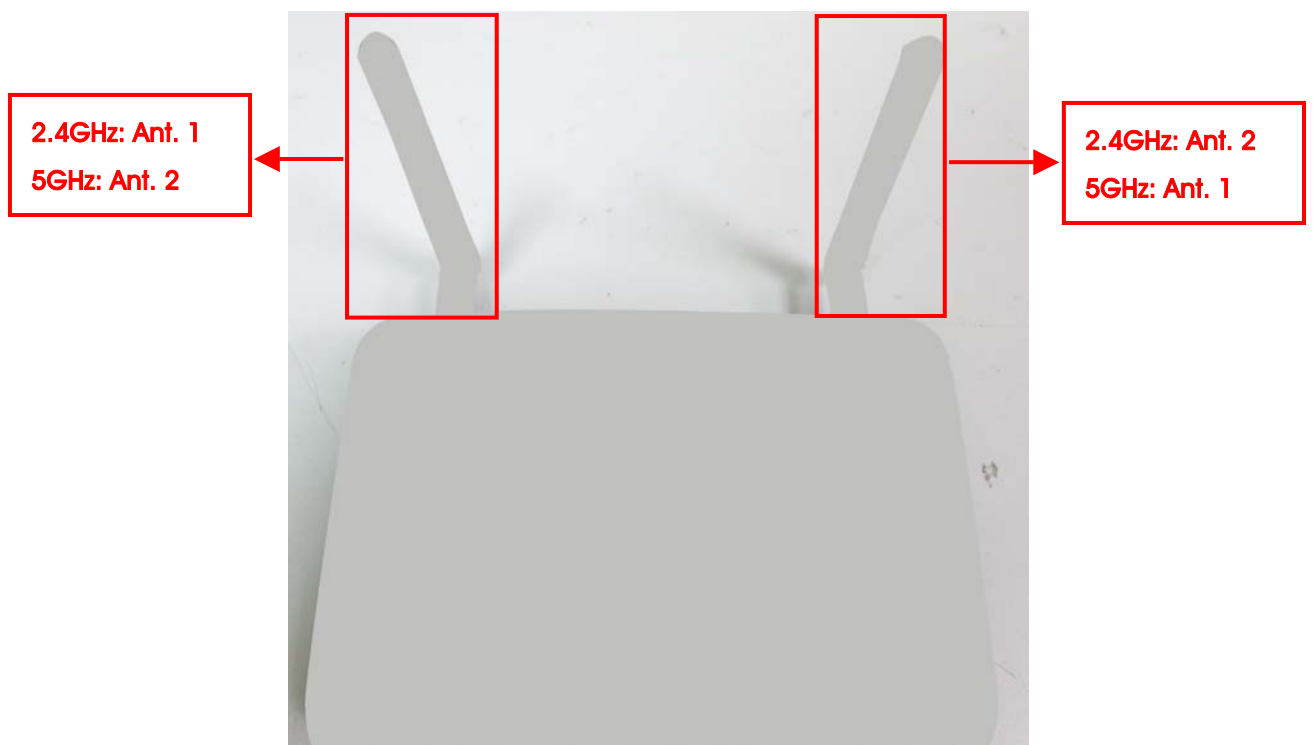



### 3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48, 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 38, 46, 151, 159.

For 80MHz bandwidth systems, use Channel 42, 155.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-
5725~5850 MHz Band 4	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Ant.
AC Power Conducted Emission	Normal Link		-	-	-
Max. Conducted Output Power	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/ 157/165	1+2
	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/ 157/165	1+2
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	1+2
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	1+2
Power Spectral Density	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/ 157/165	1+2
	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/ 157/165	1+2
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	1+2
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	1+2
26dB Spectrum Bandwidth & 99% Occupied Bandwidth Measurement	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/ 157/165	1+2
	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/ 157/165	1+2
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	1+2
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	1+2
6dB Spectrum Bandwidth Measurement	11a/BPSK	Band 4	6Mbps	149/157/165	1+2
	11ac VHT20	Band 4	MCS0/Nss1	149/157/165	1+2
	11ac VHT40	Band 4	MCS0/Nss1	151/159	1+2
	11ac VHT80	Band 4	MCS0/Nss1	155	1+2
Radiated Emission Below 1GHz	Normal Link		-	-	-
Radiated Emission Above 1GHz	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/ 157/165	1+2
	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/ 157/165	1+2
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	1+2
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	1+2

Band Edge Emission	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/ 157/165	1+2
	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/ 157/165	1+2
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	1+2
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	1+2
Frequency Stability	20 MHz	Band 1&4	-	40/157	2
	40 MHz	Band 1&4	-	38/151	2
	80 MHz	Band 1&4	-	42/155	2

Note: VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.

The following test modes were performed for all tests:

**For Conducted Emission test:**

Test Mode: Normal Link-EUT + adapter

**For Radiated Emission Below 1GHz test:**

The EUT was performed at Y axis and Z axis position, and the worst case was found at Z axis. So the measurement will follow this same test configuration.

Test Mode: Normal Link-EUT in Z axis + adapter

**For Radiated Emission Above 1GHz test:**

The EUT was performed at Y axis and Z axis position for Radiated emission above 1GHz test, and the worst case was found at Z axis. So the measurement will follow this same test configuration.

**For Co-location MPE Test:**

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to FA4N1172-37) test is added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

### 3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Designation No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	TW0006	IC 4086D	-
CO02-CB	Conduction	Hsin Chu	TW0006	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.7. Table for Class II Change

This product is an extension of original one reported under Sporton project number: FR421849AA and AB  
 Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Updating adapter (Model name: KSAS0121200100VU) to Level VI energy efficiency.	1. AC Power Line Conducted Emissions 2. Radiated Emissions (below 1GHz)
2. Updating Band 1 to "New Rules " from "Old Rules".	1. Maximum Conducted Output Power 2. 26dB Bandwidth and 99% Occupied Bandwidth 3. Power Spectral Density 4. Radiated Emissions (above 1GHz) 5. Band Edge Emissions 6. Frequency Stability
3. Updating Band 4 to "New Rules " from "Old Rules".	1. Maximum Conducted Output Power 2. 26dB Bandwidth and 99% Occupied Bandwidth 3. 6dB Spectrum Bandwidth 4. Power Spectral Density 5. Radiated Emissions (above 1GHz) 6. Band Edge Emissions 7. Frequency Stability
4. Updating applicant's company to "121 Theory Drive, Irvine, CA 92617, USA" from "131 Theory Drive, Irvine, CA 92617, USA". 5. Updating brand name to "LINKSYS" from "Linksys". 6. Removing accessories: RJ-45 cable.	It's not necessary to re-test all test items.

### 3.8. Table for Supporting Units

For Test Site No: 03CH01-CB (below 1GHz test)

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC
NB*2	APPLE	MACpro	QDS-BRCM1055
WLAN AP	NETGEAR	WNDR3300v2	PY309300116
Earphone	e-Power	S90W	N/A

For Test Site No: 03CH01-CB (above 1GHz test)

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC

For Test Site No: CO02-CB

Support Unit	Brand	Model	FCC ID
NB*3	DELL	E6430	DoC
AP Router	Planex	GW-AP54SGX	KA220030603014-1
Earphone	e-Power	S90W	N/A

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC

### 3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Software Version	MT76xxE_AP					
Mode	Test Frequency (MHz)					
	NCB: 20MHz					
	5180 MHz	5200 MHz	5240 MHz	5745 MHz	5785 MHz	5825 MHz
802.11a	2A/24	3F/2D	27/23	29/28	3F/30	35/2F
802.11ac MCS0/Nss1 VHT20	30/2E	3F/30	24/21	23/21	3F/2E	2F/2C
Mode	NCB: 40MHz					
802.11ac MCS0/Nss1 VHT40	5190 MHz	5230 MHz	5755 MHz	5795 MHz		
	21/1E	24/21	20/1E	3F/2F		
Mode	NCB: 80MHz					
802.11ac MCS0/Nss1 VHT80	5210 MHz			5775 MHz		
	18/18			18/18		

### 3.10. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

### 3.11. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11a	1.440	1.540	93.51	0.29	0.69
802.11ac MCS0/Nss1 VHT20	1.370	1.460	93.84	0.28	0.73
802.11ac MCS0/Nss1 VHT40	0.666	0.782	85.17	0.70	1.50
802.11ac MCS0/Nss1 VHT80	0.306	0.440	69.55	1.58	3.27

### 3.12. Test Configurations


#### 3.12.1. AC Power Line Conduction Emissions Test Configuration

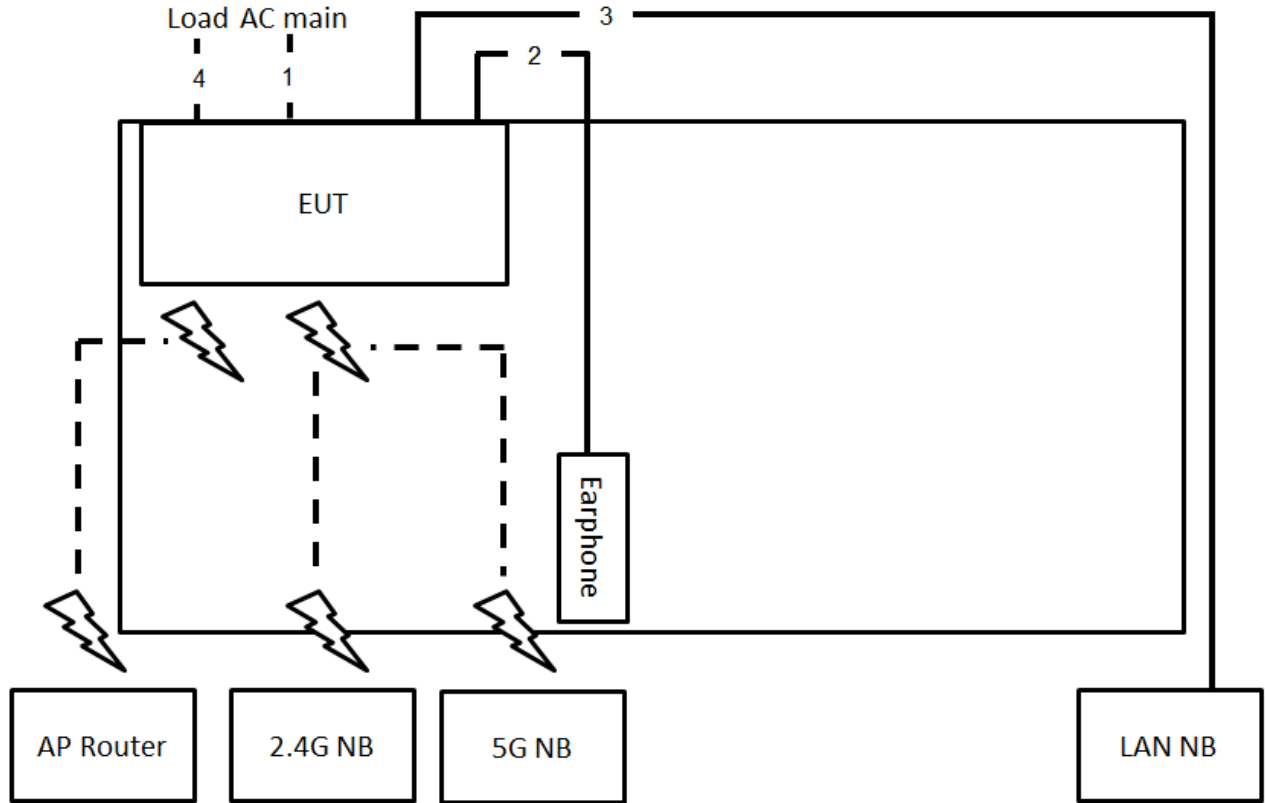

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	Audio cable	No	1.4m
3	RJ-45 cable	No	10m
4	RJ-45 cable*3	No	1.5m

### 3.12.2. Radiation Emissions Test Configuration


Test Configuration: 30MHz ~1GHz

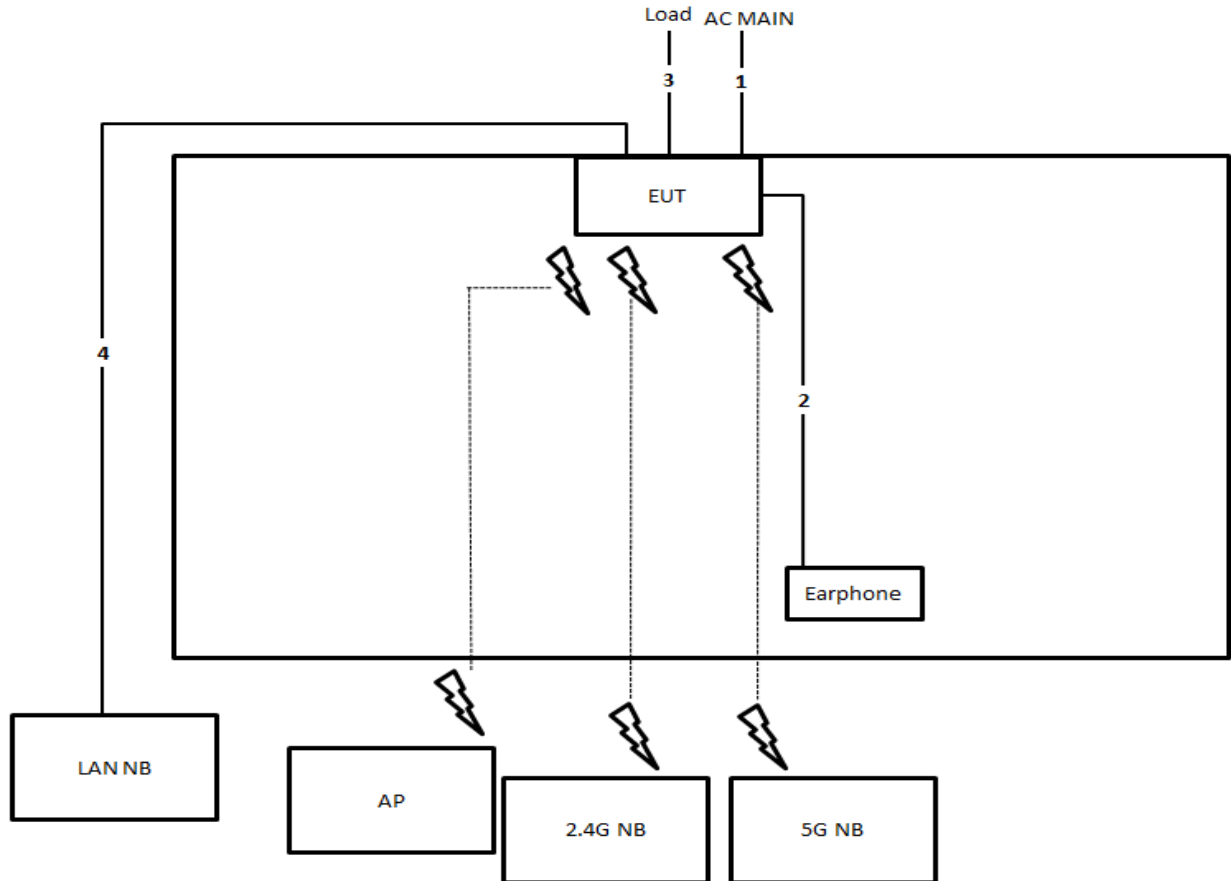

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	Audio cable	No	1.4m
3	RJ-45 cable*3	No	1.5m
4	RJ-45 cable	No	10m



Test Configuration: above 1GHz

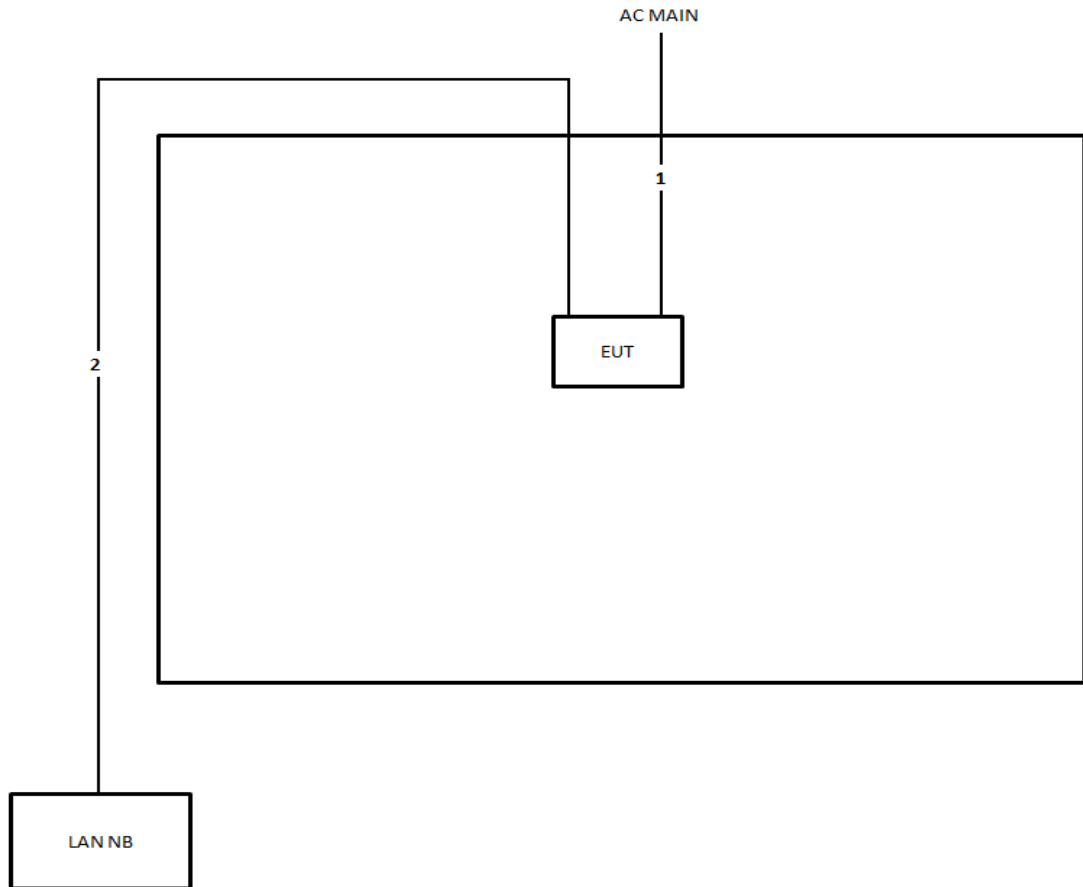

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

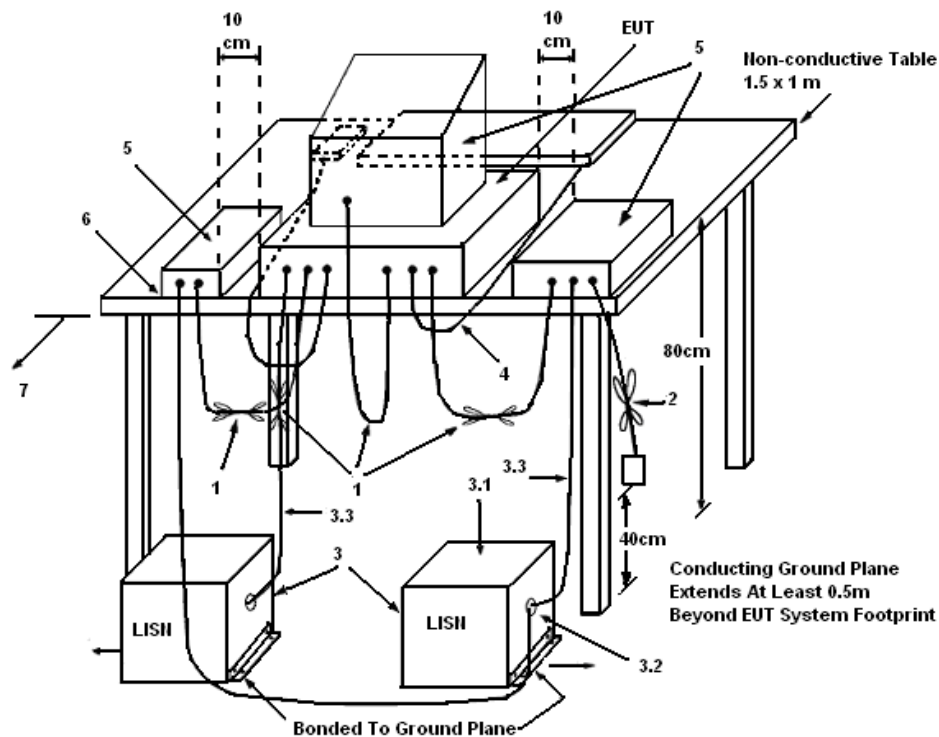

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	25°C	Humidity	58%
Test Engineer	Edison Lin	Phase	Line
Configuration	Normal Link		

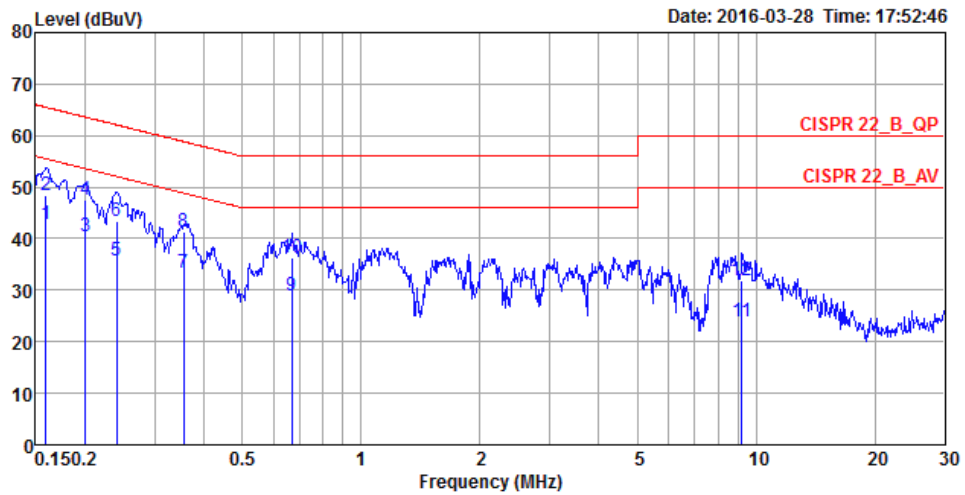

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Remark	Cable Loss	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		dB	
1	0.1590	42.94	-12.58	55.52	32.82	9.96	Average	0.16	LINE
2	0.1590	48.52	-17.00	65.52	38.40	9.96	QP	0.16	LINE
3	0.2007	40.35	-13.23	53.58	30.22	9.95	Average	0.18	LINE
4	0.2007	47.62	-15.96	63.58	37.49	9.95	QP	0.18	LINE
5	0.2404	35.75	-16.33	52.08	25.59	9.97	Average	0.19	LINE
6	0.2404	43.54	-18.54	62.08	33.38	9.97	QP	0.19	LINE
7	0.3558	33.42	-15.41	48.83	23.22	10.00	Average	0.20	LINE
8	0.3558	41.22	-17.61	58.83	31.02	10.00	QP	0.20	LINE
9	0.6683	29.03	-16.97	46.00	18.80	10.03	Average	0.20	LINE
10	0.6683	36.33	-19.67	56.00	26.10	10.03	QP	0.20	LINE
11	9.2043	24.03	-25.97	50.00	13.51	10.15	Average	0.37	LINE
12	9.2043	31.95	-28.05	60.00	21.43	10.15	QP	0.37	LINE

Temperature	25°C	Humidity	58%
Test Engineer	Edison Lin	Phase	Neutral
Configuration	Normal Link		

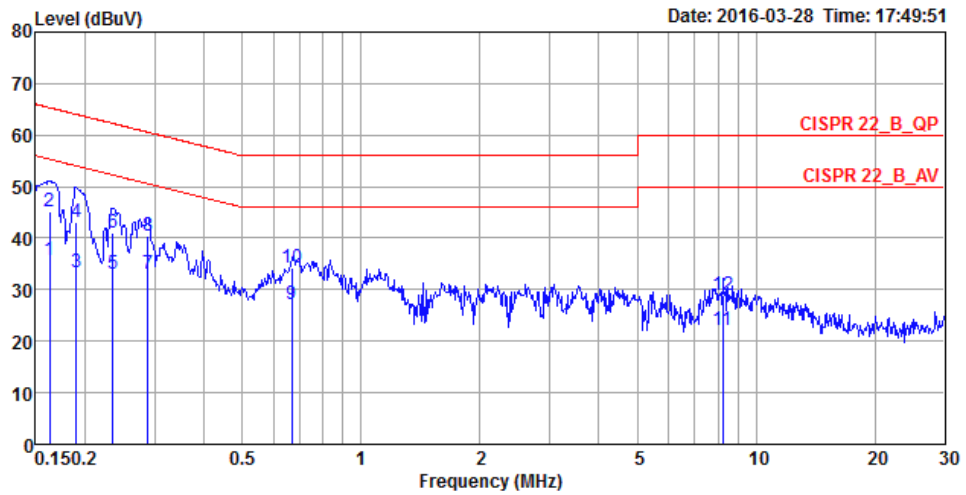

	Freq	Level	Over	Limit	Read	LISN	Remark	Cable	
	MHz	dBuV	Limit	Line	Level	Factor		Loss	Pol/Phase
			dB	dBuV	dBuV	dB		dB	
1	0.1624	35.75	-19.59	55.34	25.63	9.96	Average	0.16	NEUTRAL
2	0.1624	45.09	-20.25	65.34	34.97	9.96	QP	0.16	NEUTRAL
3	0.1904	33.46	-20.56	54.02	23.32	9.96	Average	0.18	NEUTRAL
4	0.1904	43.10	-20.92	64.02	32.96	9.96	QP	0.18	NEUTRAL
5	0.2353	33.02	-19.24	52.26	22.87	9.96	Average	0.19	NEUTRAL
6	0.2353	41.05	-21.21	62.26	30.90	9.96	QP	0.19	NEUTRAL
7	0.2878	33.09	-17.50	50.59	22.93	9.97	Average	0.19	NEUTRAL
8	0.2878	40.36	-20.23	60.59	30.20	9.97	QP	0.19	NEUTRAL
9	0.6683	27.27	-18.73	46.00	17.10	9.97	Average	0.20	NEUTRAL
10	0.6683	34.13	-21.87	56.00	23.96	9.97	QP	0.20	NEUTRAL
11	8.2351	22.11	-27.89	50.00	11.62	10.12	Average	0.37	NEUTRAL
12	8.2351	29.06	-30.94	60.00	18.57	10.12	QP	0.37	NEUTRAL

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

### 4.2.1. Limit

No restriction limits.

### 4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

### 4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

### 4.2.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

<b>Temperature</b>	21°C	<b>Humidity</b>	59%
<b>Test Engineer</b>	Peter Wu		


Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180 MHz	28.35	17.28
	5200 MHz	41.57	27.70
	5240 MHz	34.70	18.41
	5745 MHz	34.17	18.93
	5785 MHz	43.57	30.48
	5825 MHz	56.61	35.86
802.11ac MCS0/Nss1 VHT20	5180 MHz	37.65	24.14
	5200 MHz	41.48	27.61
	5240 MHz	34.43	18.41
	5745 MHz	29.91	17.89
	5785 MHz	46.78	30.56
	5825 MHz	43.13	25.44
802.11ac MCS0/Nss1 VHT40	5190 MHz	50.87	36.61
	5230 MHz	75.80	38.49
	5755 MHz	52.32	36.76
	5795 MHz	97.97	58.61
802.11ac MCS0/Nss1 VHT80	5210 MHz	81.45	74.96
	5775 MHz	81.16	75.25

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5180 MHz

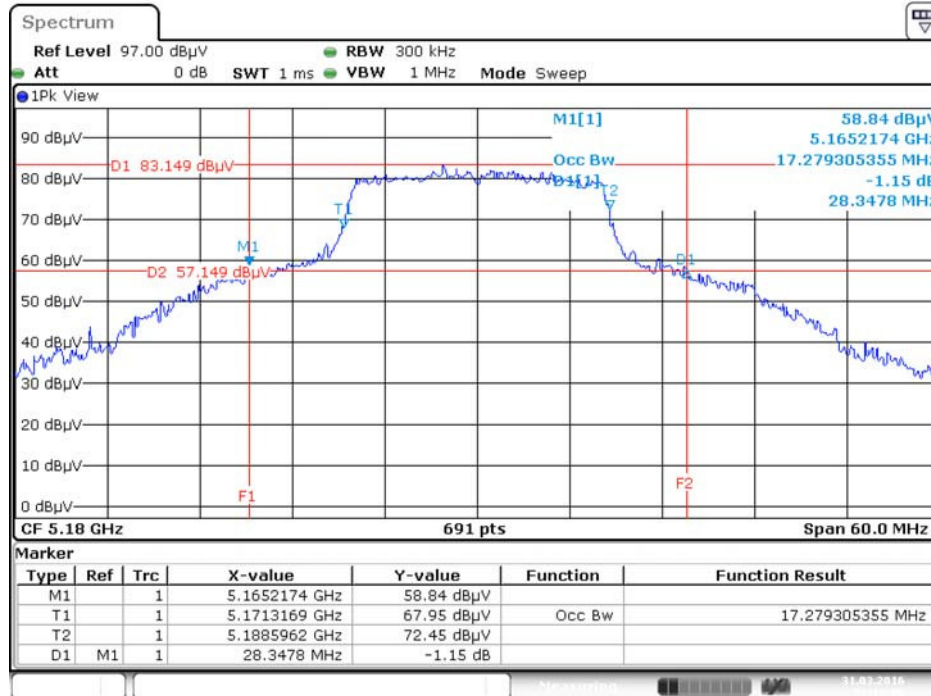

Date: 31.MAR.2016 22:13:56


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5200 MHz

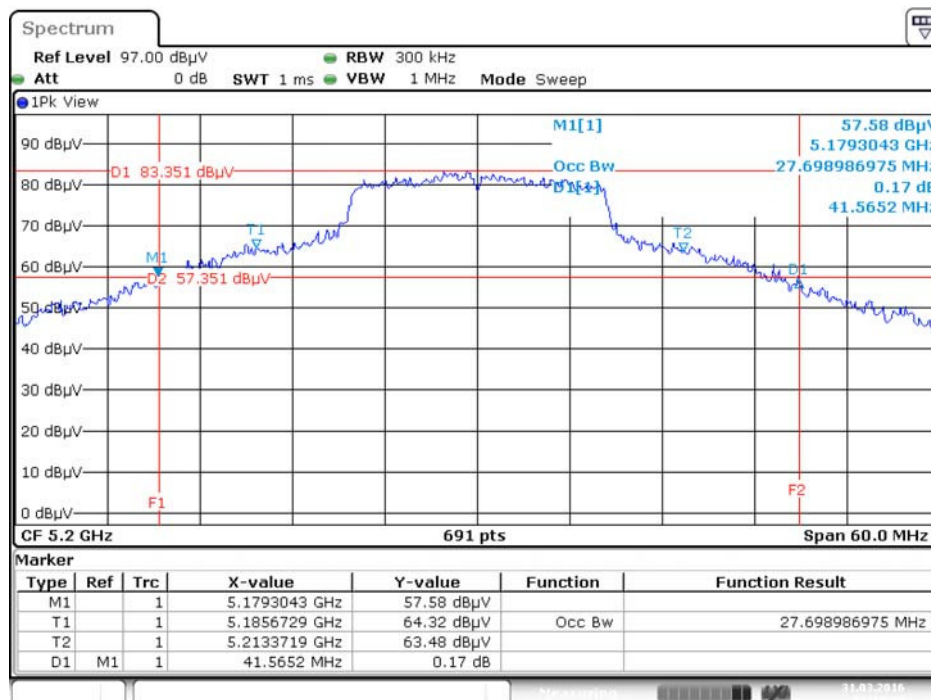

Date: 31.MAR.2016 22:13:24




26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5240 MHz

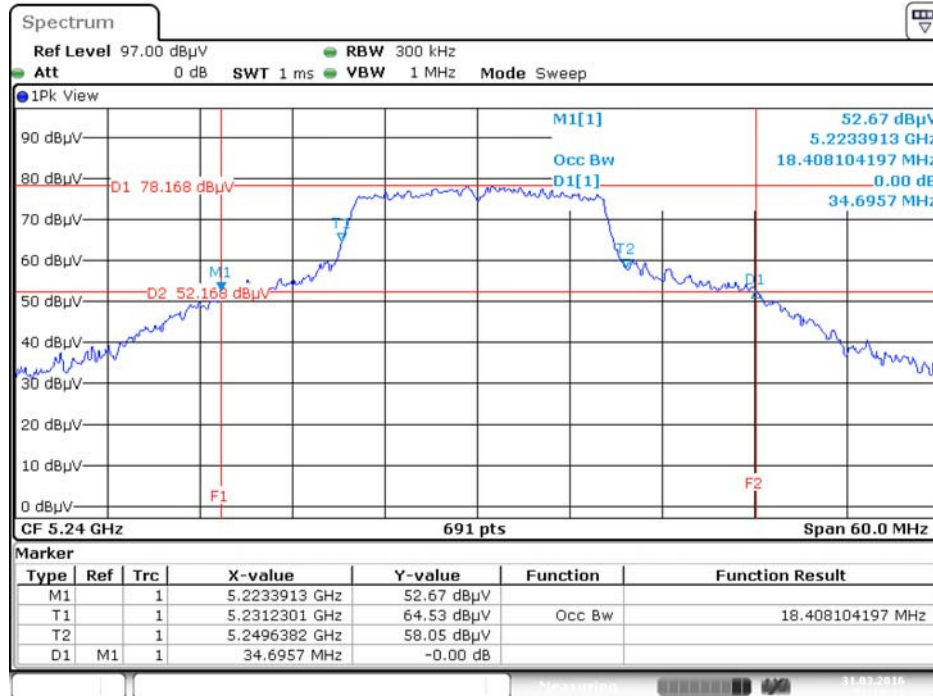


Date: 31.MAR.2016 22:12:11

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5745 MHz

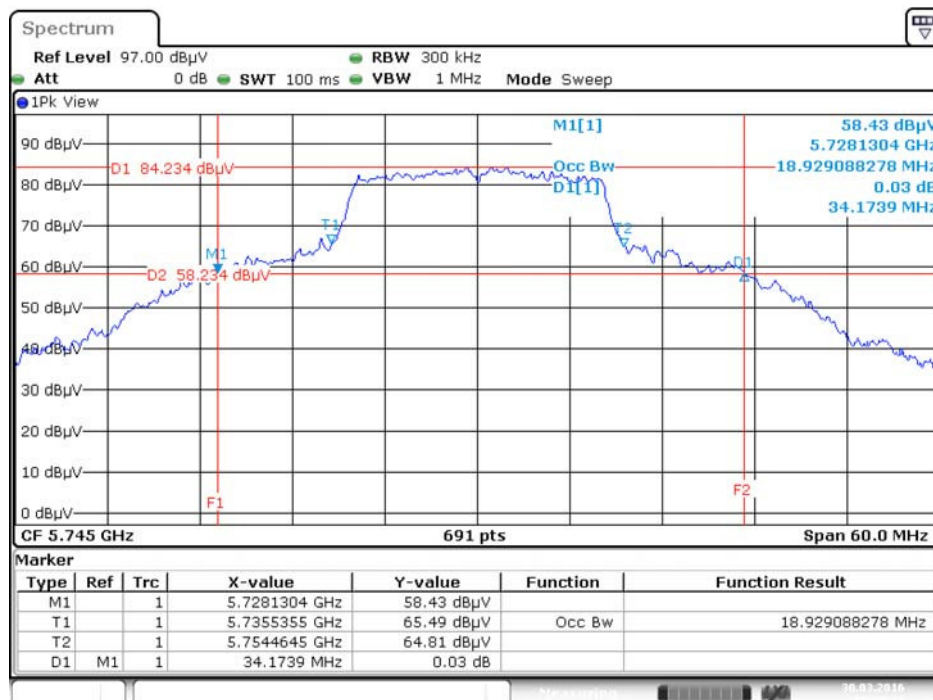


Date: 30.MAR.2016 15:20:18

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5785 MHz

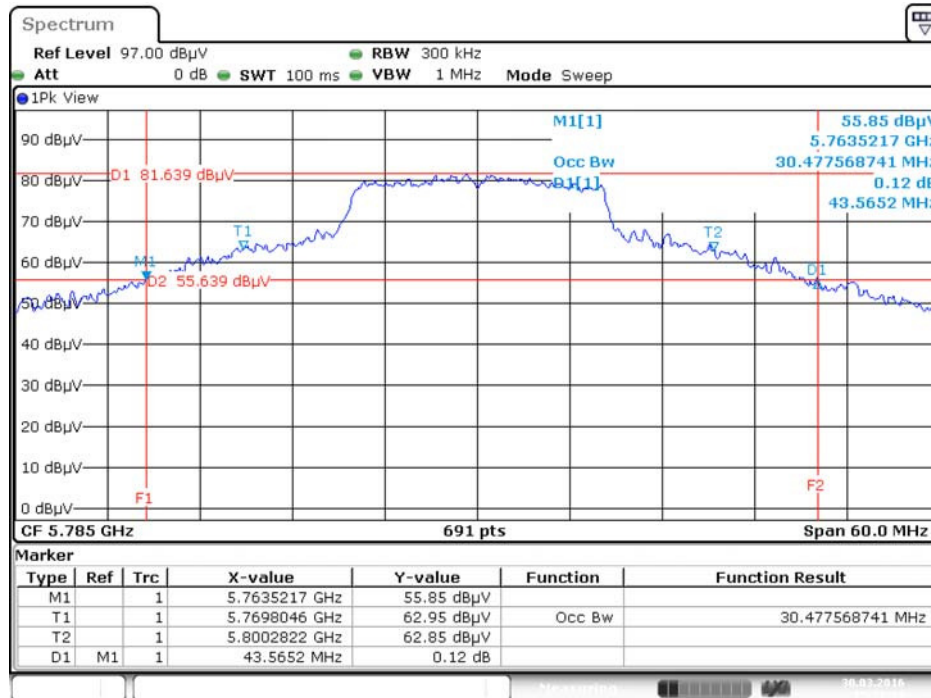


Date: 30.MAR.2016 15:21:18

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5825 MHz

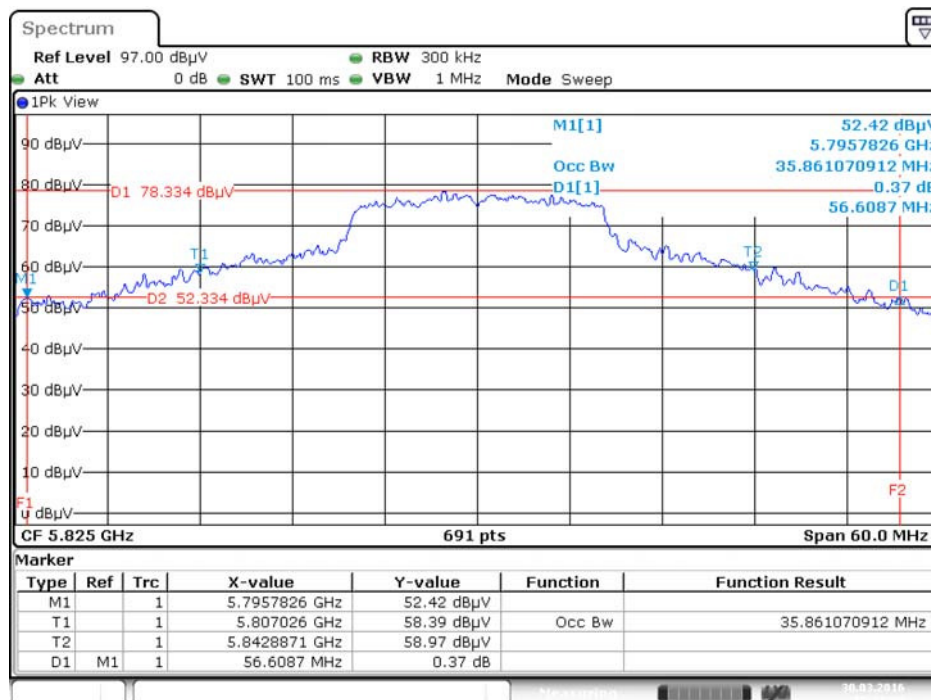


Date: 30.MAR.2016 15:22:25

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 / 5180 MHz**

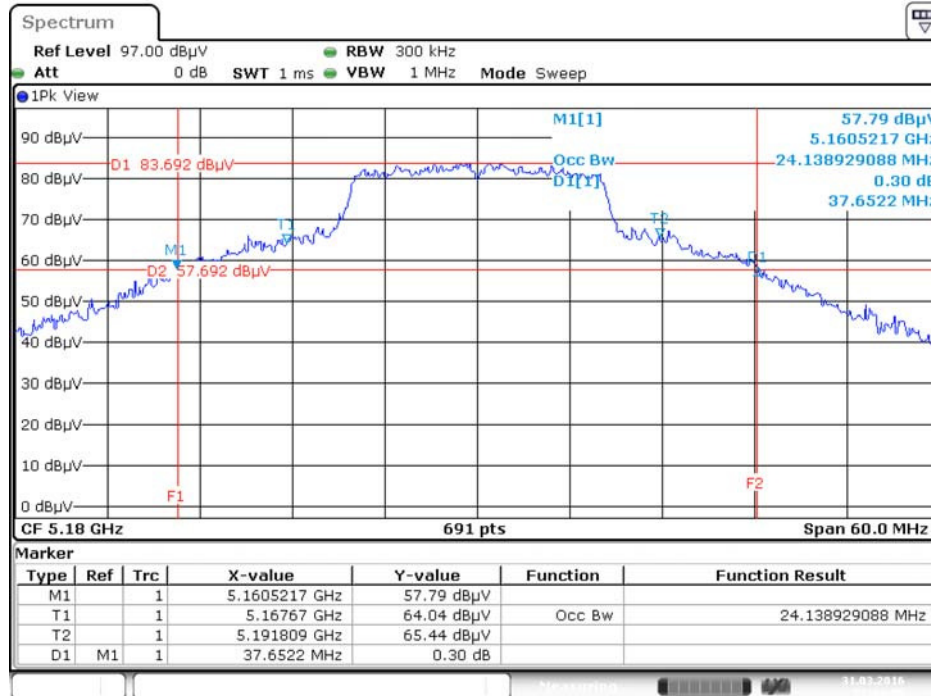


Date: 31.MAR.2016 22:04:06

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 / 5200 MHz**

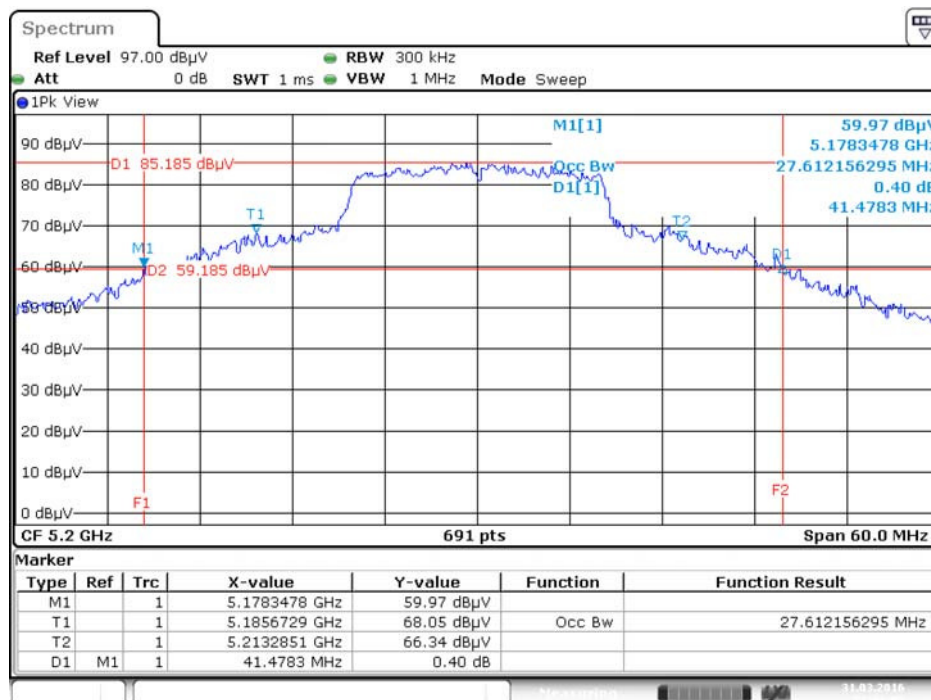


Date: 31.MAR.2016 22:06:02

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 / 5240 MHz

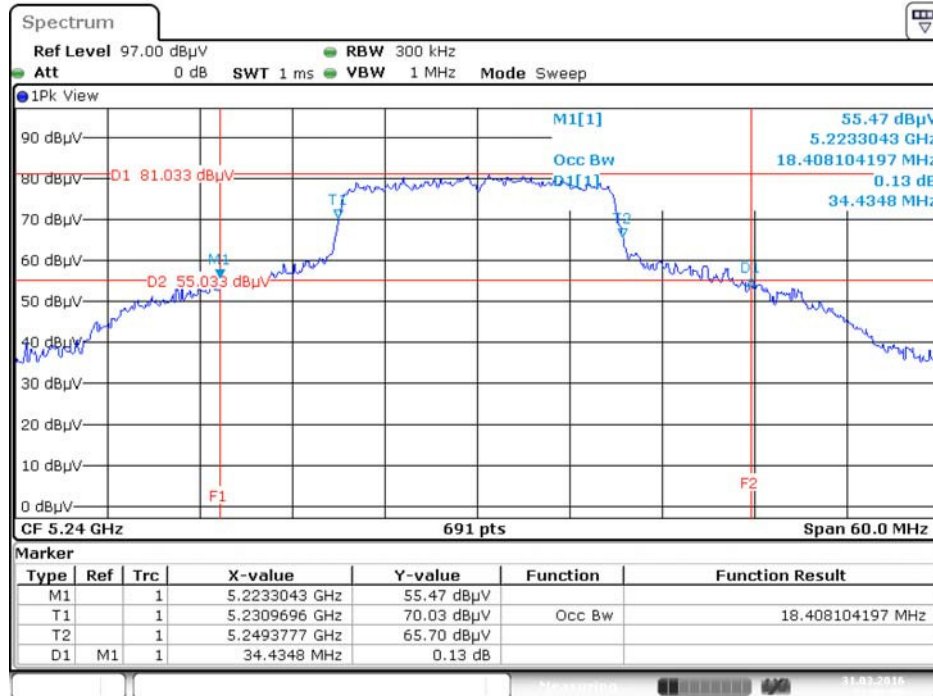


Date: 31.MAR.2016 22:08:51

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 / 5745 MHz

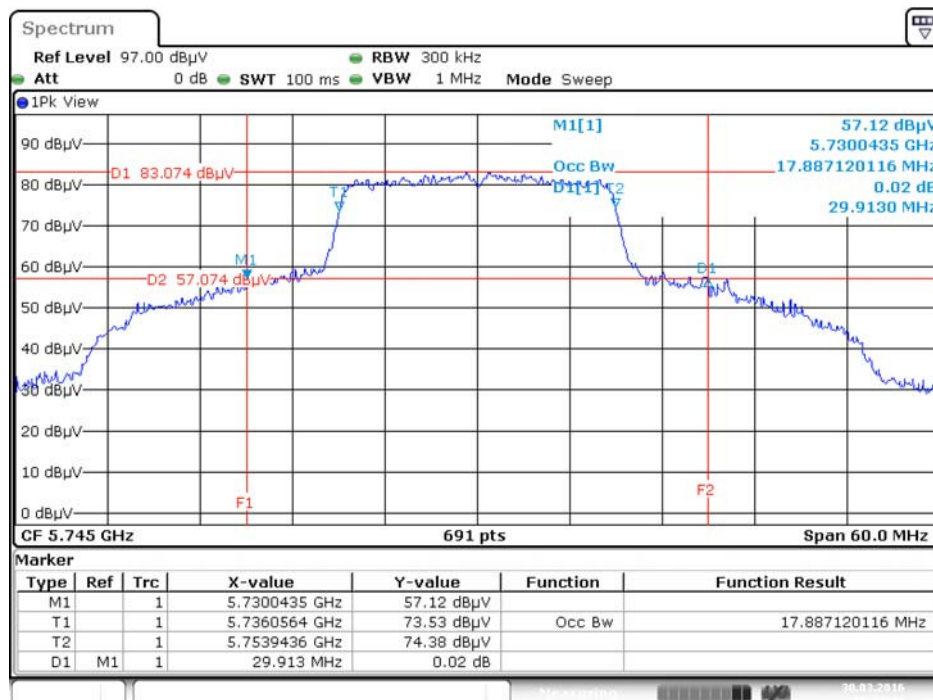


Date: 30.MAR.2016 15:23:41

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 / 5785 MHz

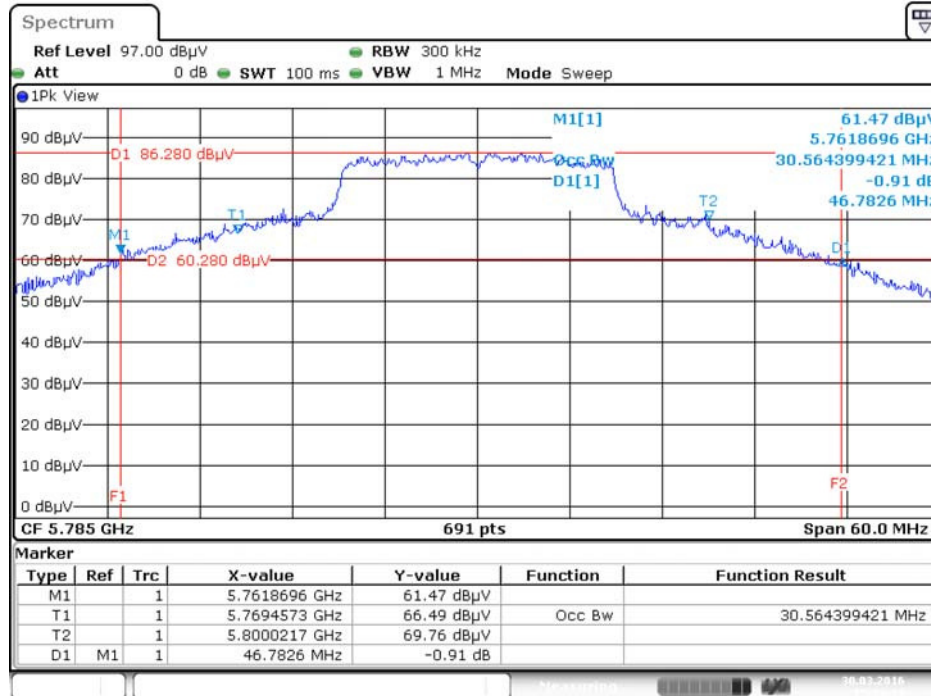


Date: 30.MAR.2016 15:24:18

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 / 5825 MHz

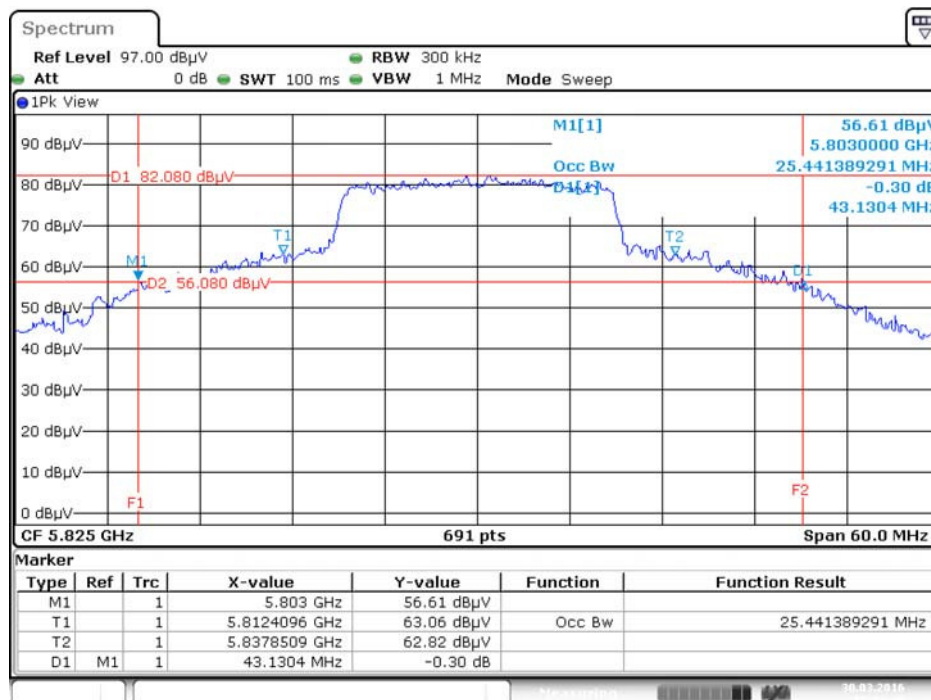


Date: 30.MAR.2016 15:24:48

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 / 5190 MHz

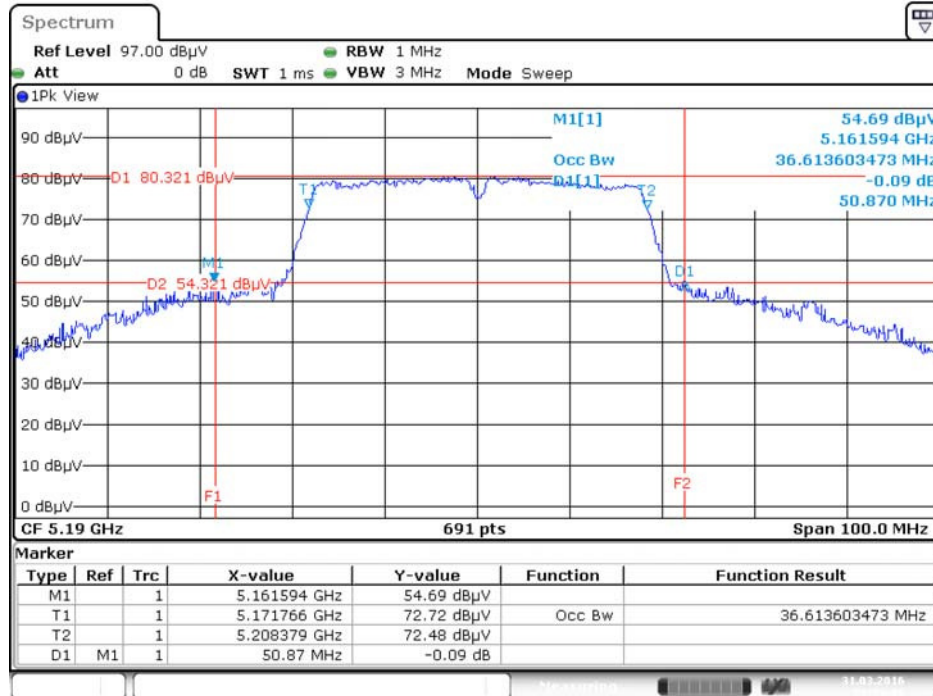


Date: 31.MAR.2016 21:54:16

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 / 5230 MHz

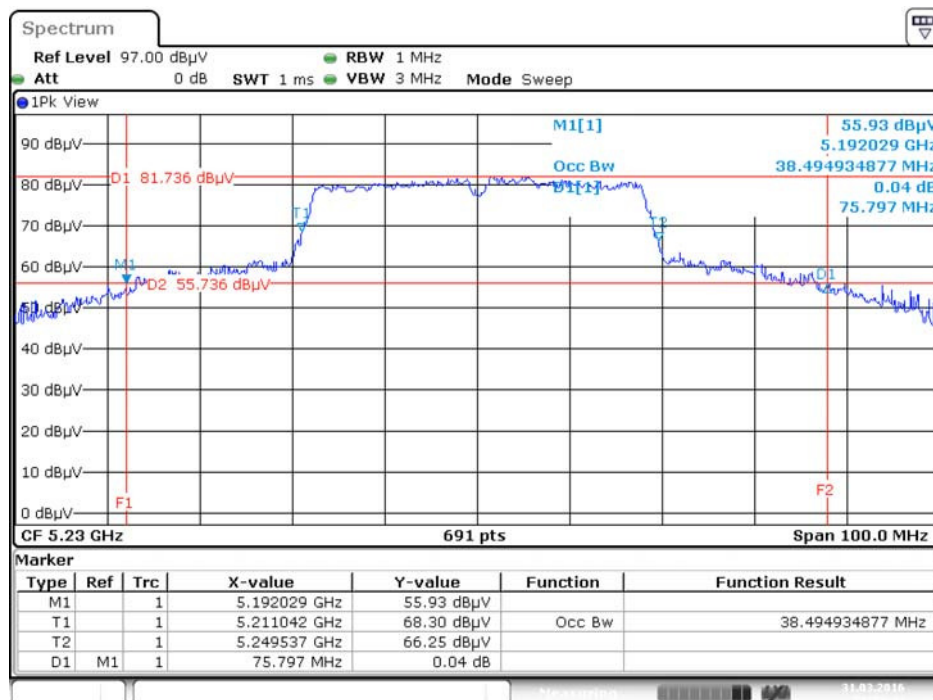


Date: 31.MAR.2016 21:59:41

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 / 5755 MHz**

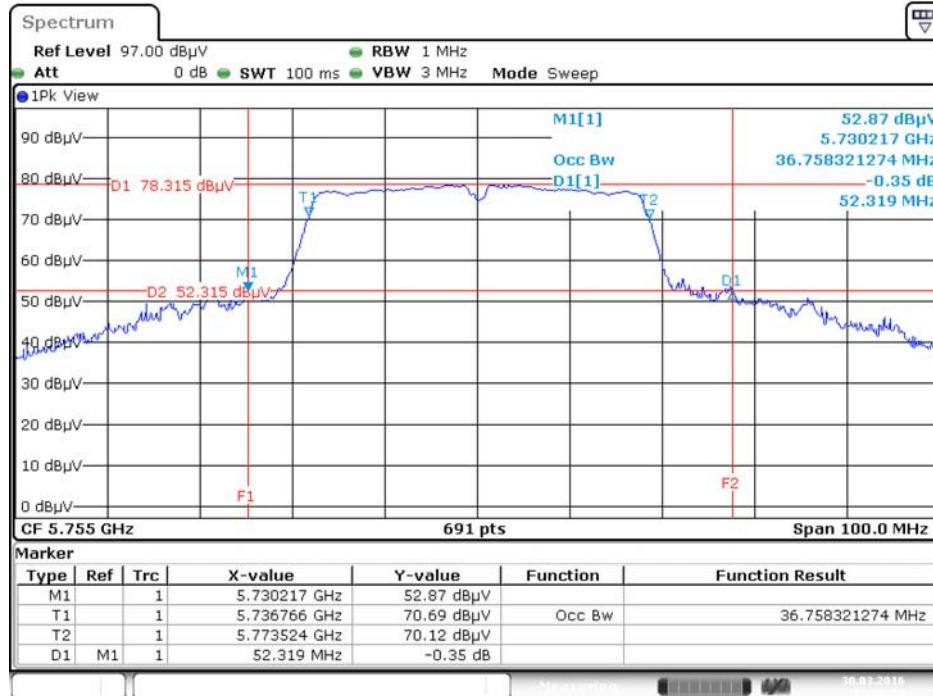


Date: 30.MAR.2016 15:25:23

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 / 5795 MHz**

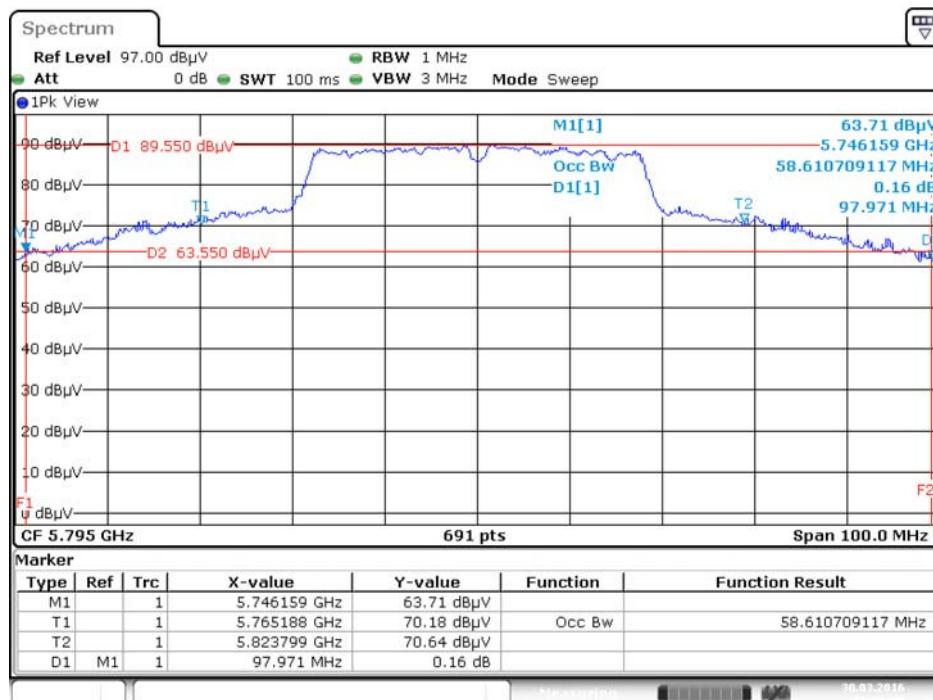


Date: 30.MAR.2016 15:26:09

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 / 5210 MHz

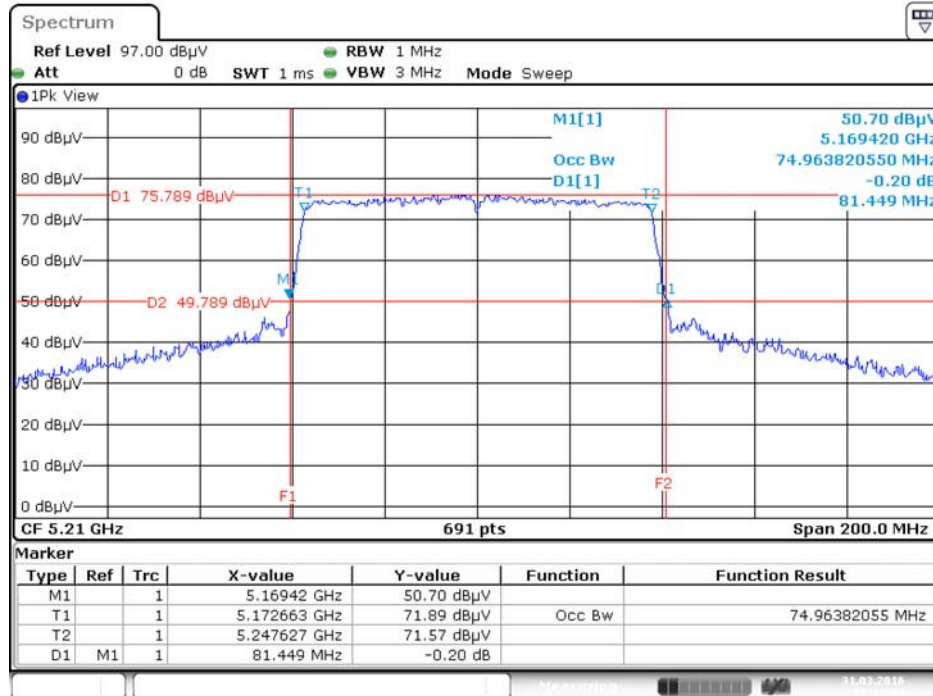

Date: 31.MAR.2016 22:15:05

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 / 5775 MHz

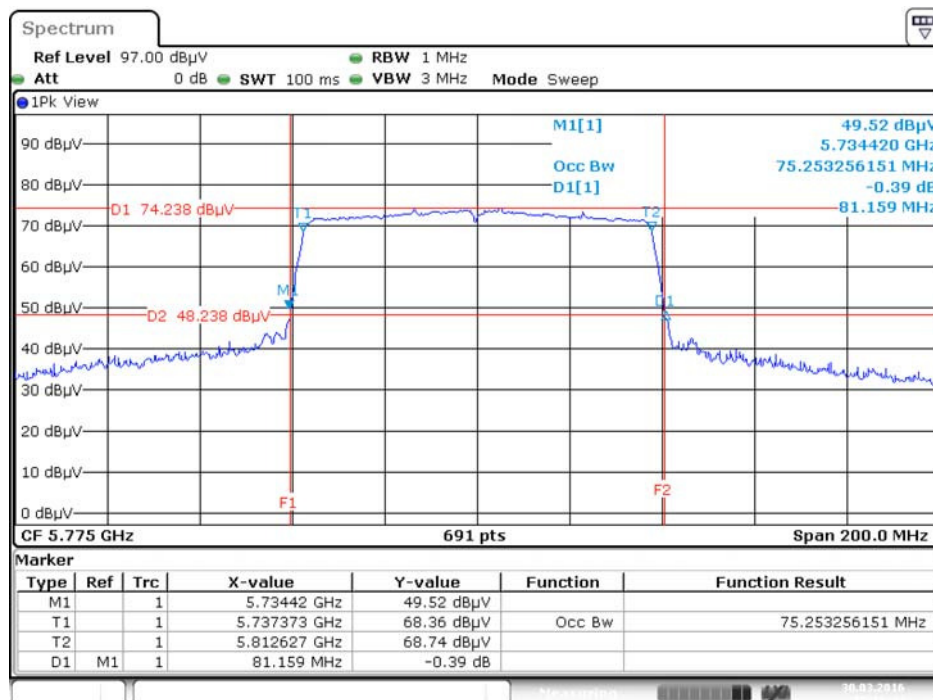

Date: 30.MAR.2016 15:16:44



### 4.3. 6dB Spectrum Bandwidth Measurement

#### 4.3.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

#### 4.3.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 4.3.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB789033 D02 v01r02 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (C) Emission Bandwidth.
3. Multiple antenna system was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

#### 4.3.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of 6dB Spectrum Bandwidth


<b>Temperature</b>	21°C	<b>Humidity</b>	59%
<b>Test Engineer</b>	Peter Wu		

Mode	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11a	5745 MHz	16.46	500	Complies
	5785 MHz	16.35	500	Complies
	5825 MHz	16.41	500	Complies
802.11ac MCS0/Nss1 VHT20	5745 MHz	17.62	500	Complies
	5785 MHz	17.74	500	Complies
	5825 MHz	17.68	500	Complies
802.11ac MCS0/Nss1 VHT40	5755 MHz	36.41	500	Complies
	5795 MHz	36.41	500	Complies
802.11ac MCS0/Nss1 VHT80	5775 MHz	75.94	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

6 dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5785 MHz

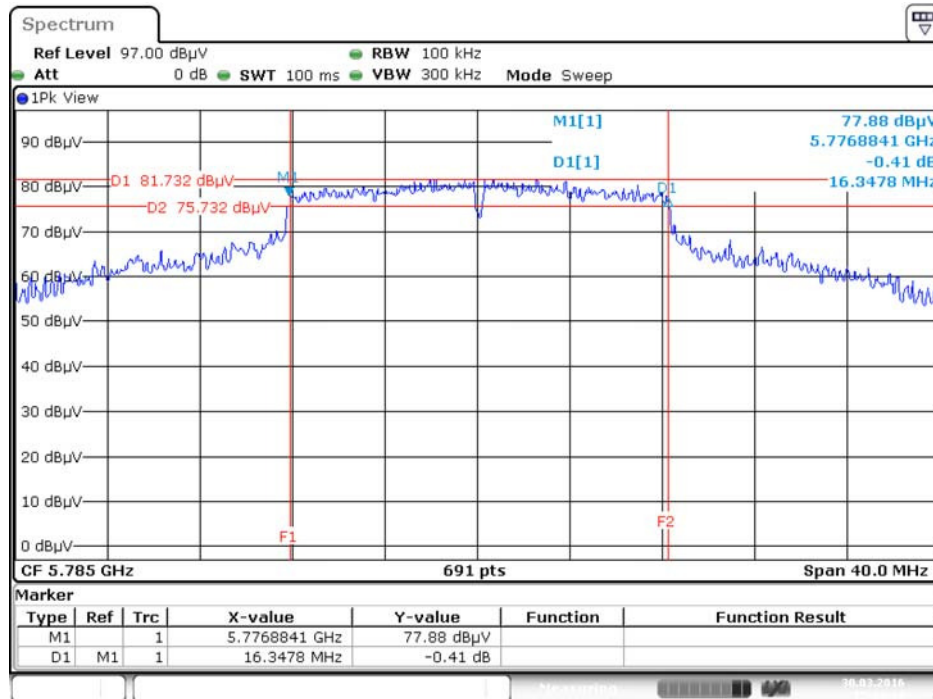


Date: 30.MAR.2016 15:34:14

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 / 5745 MHz

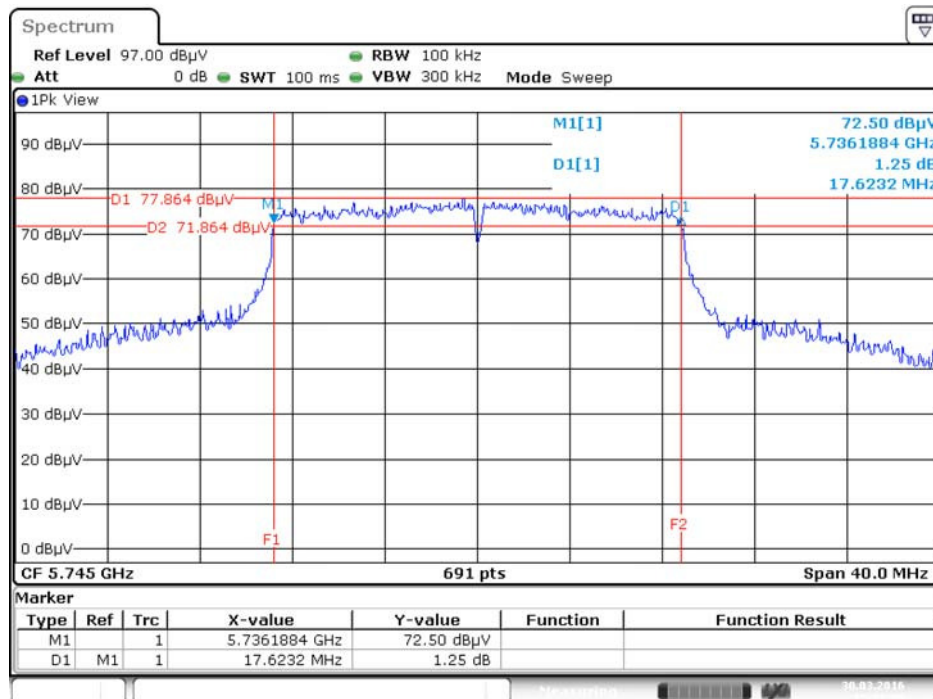


Date: 30.MAR.2016 15:37:01

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 / 5755 MHz

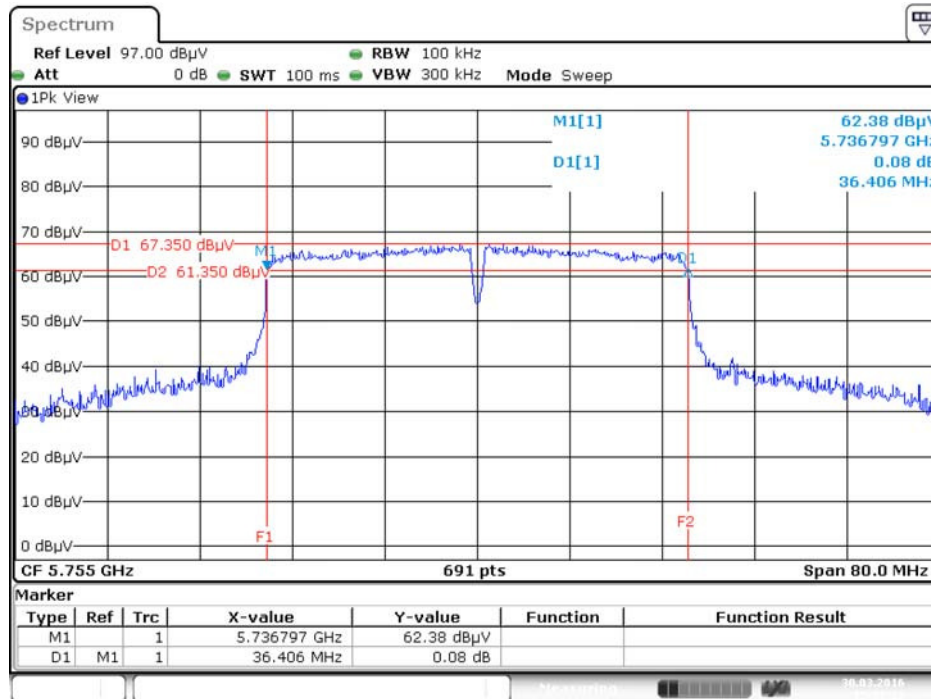

Date: 30.MAR.2016 15:37:37

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 / 5775 MHz

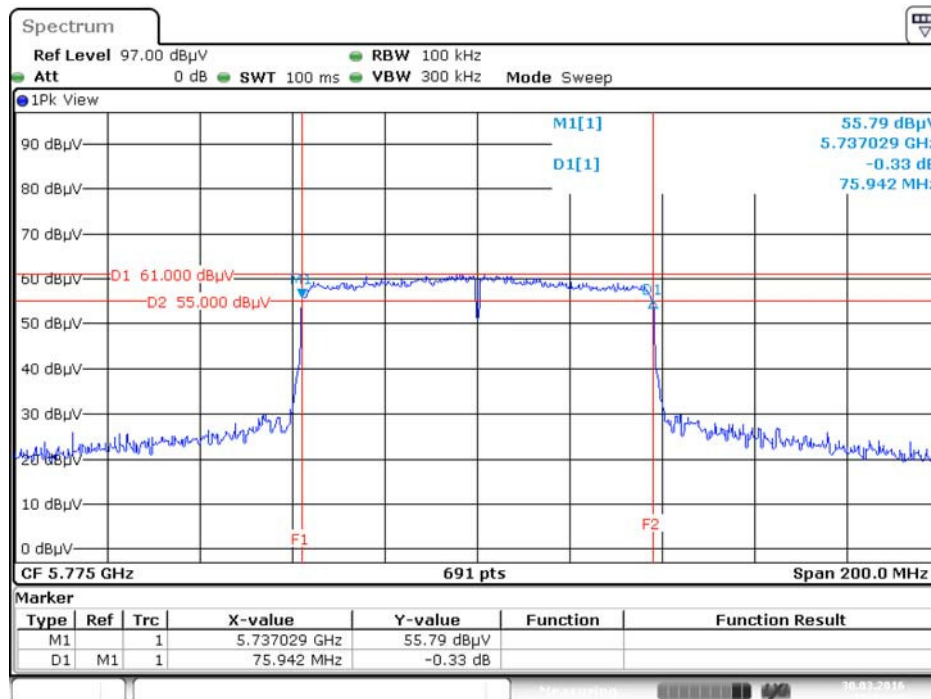

Date: 30.MAR.2016 15:39:25

## 4.4. Maximum Conducted Output Power Measurement

### 4.4.1. Limit

Frequency Band		Limit
<input checked="" type="checkbox"/>	5.15~5.25 GHz	
	Operating Mode	
<input type="checkbox"/>	Outdoor access point	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
<input checked="" type="checkbox"/>	Indoor access point	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
<input type="checkbox"/>	Fixed point-to-point access points	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.
<input type="checkbox"/>	Mobile and portable client devices	The maximum conducted output power over the frequency band of operation shall not exceed 250 mW (24dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

☒	5.725~5.85 GHz	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.
---	----------------	--

#### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

#### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01r02 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

#### 4.4.4. Test Setup Layout



#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of Maximum Conducted Output Power

Temperature	21°C	Humidity	59%
Test Engineer	Peter Wu	Test Date	Mar. 30, 2016 ~ May 03, 2016

Mode	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Total		
802.11a	5180 MHz	18.24	18.13	21.20	30.00	Complies
	5200 MHz	18.43	18.44	21.45	30.00	Complies
	5240 MHz	15.93	15.62	18.79	30.00	Complies
	5745 MHz	16.46	16.56	19.52	30.00	Complies
	5785 MHz	18.27	18.35	21.32	30.00	Complies
	5825 MHz	17.93	18.03	20.99	30.00	Complies
802.11ac MCS0/Nss1 VHT20	5180 MHz	17.55	17.68	20.63	30.00	Complies
	5200 MHz	18.13	18.22	21.19	30.00	Complies
	5240 MHz	15.24	14.92	18.09	30.00	Complies
	5745 MHz	14.22	14.43	17.34	30.00	Complies
	5785 MHz	18.01	17.99	21.01	30.00	Complies
	5825 MHz	16.98	17.03	20.02	30.00	Complies
802.11ac MCS0/Nss1 VHT40	5190 MHz	13.25	12.94	16.11	30.00	Complies
	5230 MHz	15.57	15.48	18.54	30.00	Complies
	5755 MHz	13.08	13.06	16.08	30.00	Complies
	5795 MHz	18.18	18.03	21.12	30.00	Complies
802.11ac MCS0/Nss1 VHT80	5210 MHz	9.81	10.21	13.02	30.00	Complies
	5775 MHz	10.50	10.51	13.52	30.00	Complies

## 4.5. Power Spectral Density Measurement

### 4.5.1. Limit

The following table is power spectral density limits and decrease power density limit rule refer to section 4.4.1.

Frequency Band		Limit
<input checked="" type="checkbox"/>	5.15~5.25 GHz	
	Operating Mode	
<input type="checkbox"/>	Outdoor access point	17 dBm/MHz
<input checked="" type="checkbox"/>	Indoor access point	17 dBm/MHz
<input type="checkbox"/>	Fixed point-to-point access points	17 dBm/MHz
<input type="checkbox"/>	Mobile and portable client devices	11 dBm/MHz
<input checked="" type="checkbox"/>	5.725~5.85 GHz	30 dBm/500kHz

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.


Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times
Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.	



#### 4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01r02 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements and sum the spectra across the outputs.
4. For 5.725~5.85 GHz, the measured result of PSD level must add  $10\log(500\text{kHz}/\text{RBW})$  and the final result should  $\leq 30$  dBm.

#### 4.5.4. Test Setup Layout

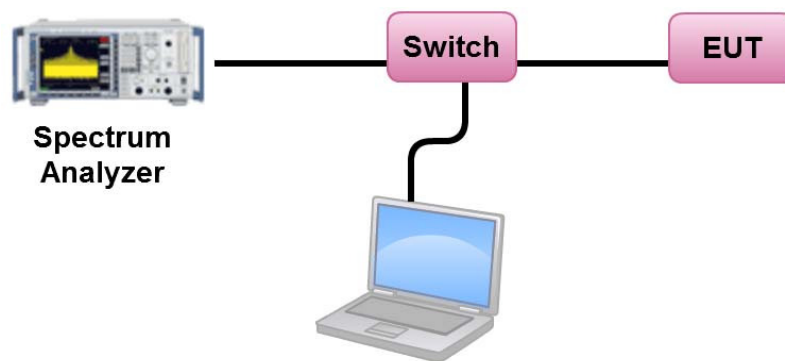

#### 4.5.5. Test Deviation

There is no deviation with the original standard.

#### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Test Result of Power Spectral Density

Temperature	21°C	Humidity	59%
Test Engineer	Peter Wu		

##### Configuration IEEE 802.11a / Ant. 1 + Ant. 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	7.80	17.00	Complies
40	5200 MHz	8.16	17.00	Complies
48	5240 MHz	5.46	17.00	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 4.66\text{dBi} < 6\text{dBi}$ , so the limit doesn't reduce.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	6.03	-3.01	3.02	30.00	Complies
157	5785 MHz	7.63	-3.01	4.62	30.00	Complies
165	5825 MHz	7.61	-3.01	4.60	30.00	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 4.66\text{dBi} < 6\text{dBi}$ , so the limit doesn't reduce.

**Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2**

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	7.40	17.00	Complies
40	5200 MHz	7.73	17.00	Complies
48	5240 MHz	4.98	17.00	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 4.66\text{dBi} < 6\text{dBi}$ , so the limit doesn't reduce.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	3.92	-3.01	0.91	30.00	Complies
157	5785 MHz	7.48	-3.01	4.47	30.00	Complies
165	5825 MHz	6.48	-3.01	3.47	30.00	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 4.66\text{dBi} < 6\text{dBi}$ , so the limit doesn't reduce.

**Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2**

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	-0.05	17.00	Complies
46	5230 MHz	2.42	17.00	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 4.66\text{dBi} < 6\text{dBi}$ , so the limit doesn't reduce.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
151	5755 MHz	-0.25	-3.01	-3.26	30.00	Complies
159	5795 MHz	4.93	-3.01	1.92	30.00	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 4.66\text{dBi} < 6\text{dBi}$ , so the limit doesn't reduce.

## Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	-6.29	17.00	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 4.66\text{dBi} < 6\text{dBi}$ , so the limit doesn't reduce.


Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
155	5775 MHz	-5.58	-3.01	-8.59	30.00	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 4.66\text{dBi} < 6\text{dBi}$ , so the limit doesn't reduce.


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


Power Density Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5200 MHz

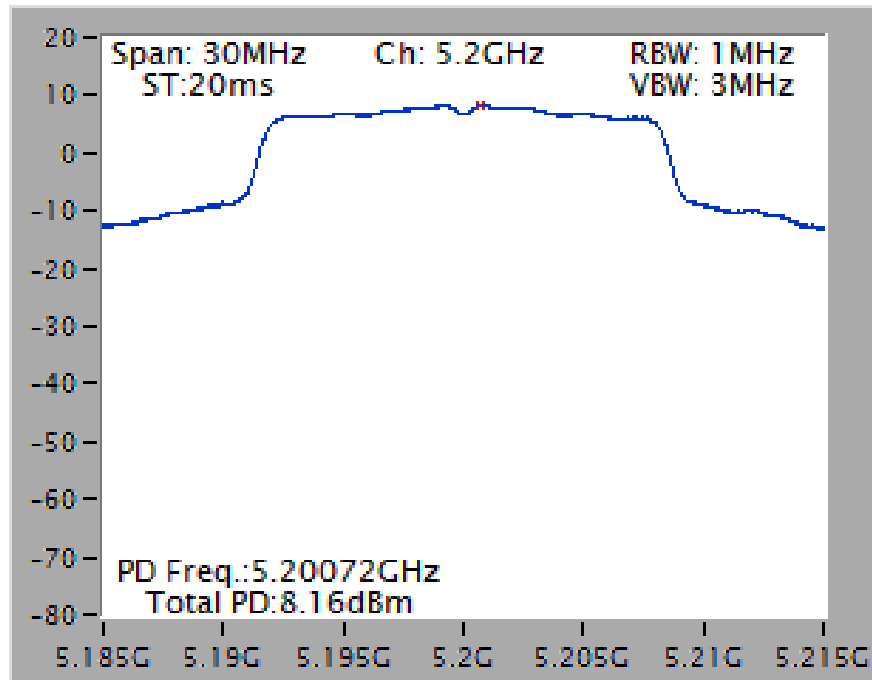


Power Density Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5785 MHz

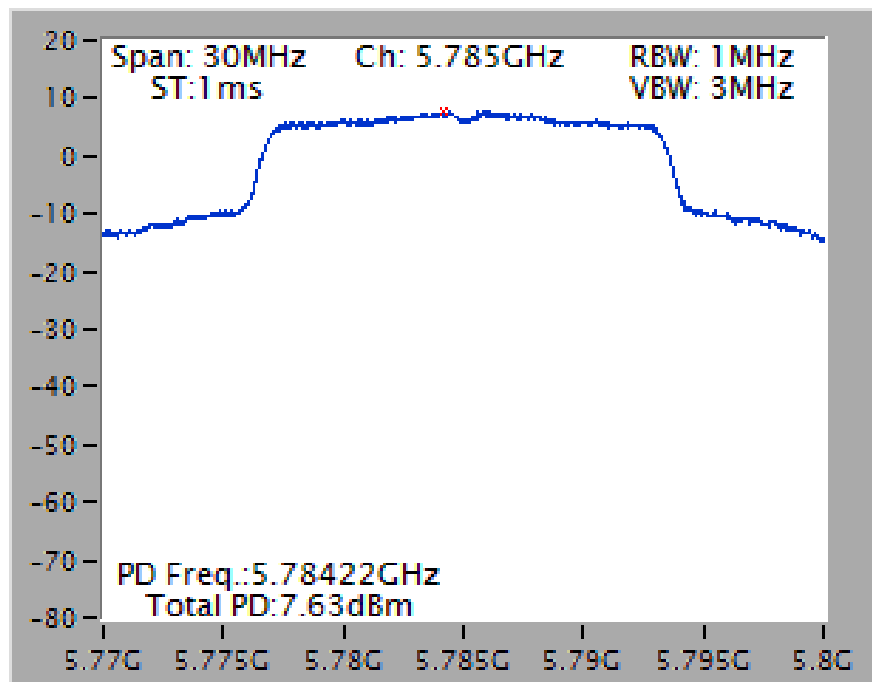


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 / 5200 MHz

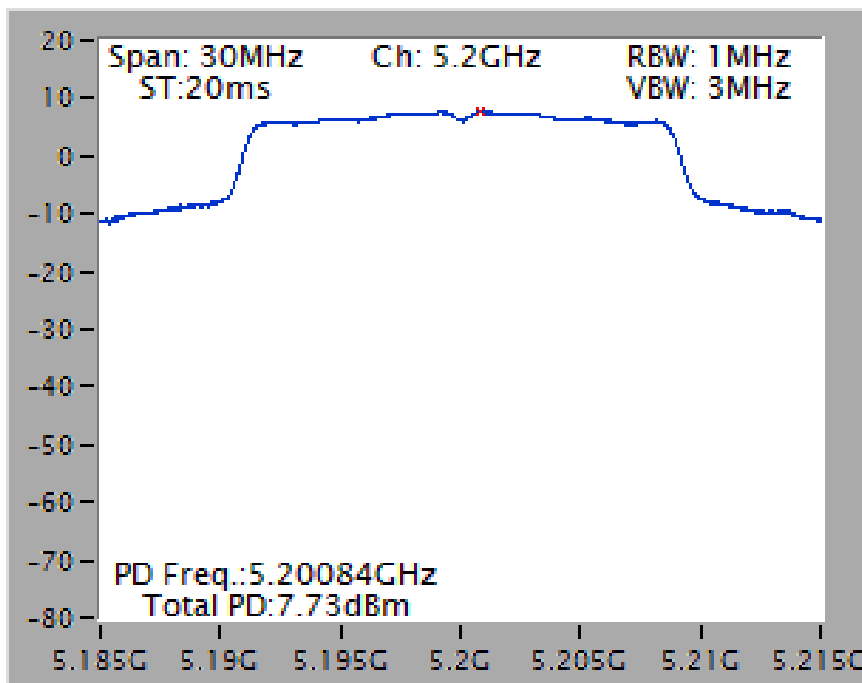


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 / 5785 MHz

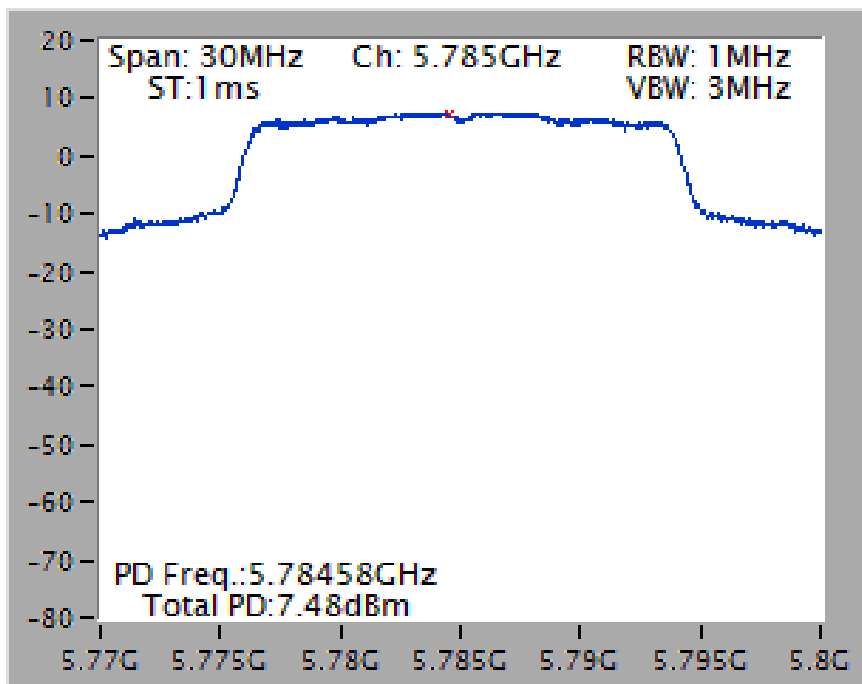


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 / 5230 MHz

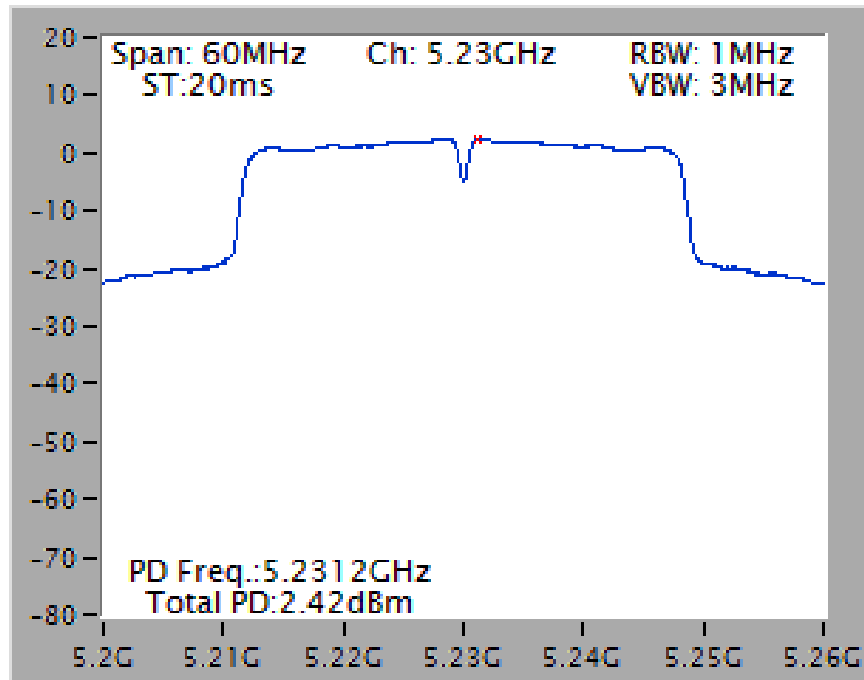


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 / 5795 MHz

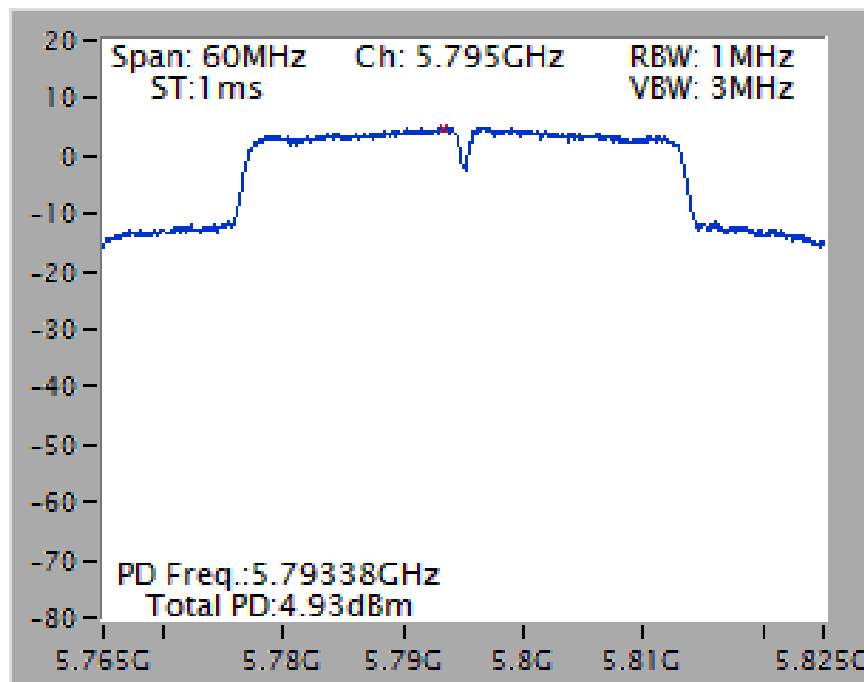

## Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 / 5210 MHz

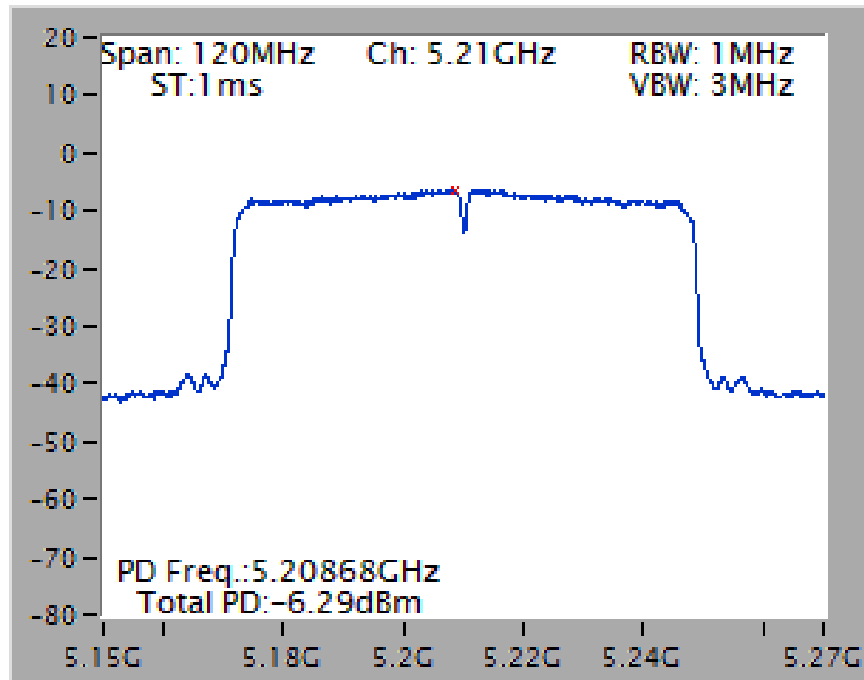

## Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 / 5775 MHz

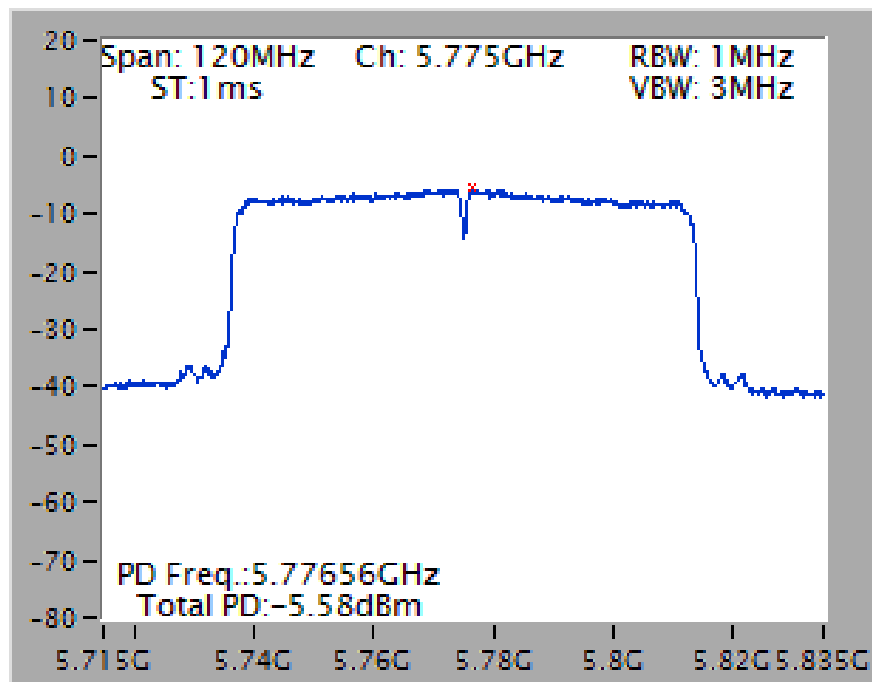



## 4.6. Radiated Emissions Measurement

### 4.6.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of  $-17$  dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

#### 4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.6.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

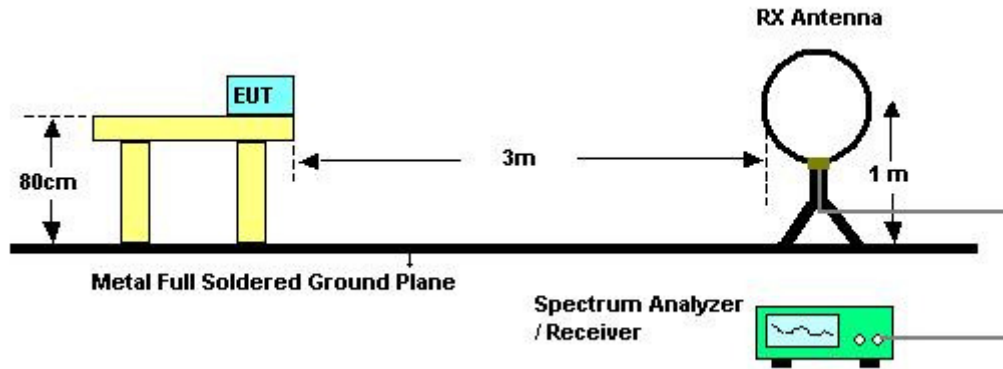

For Radiated Emissions: 30MHz~1GHz

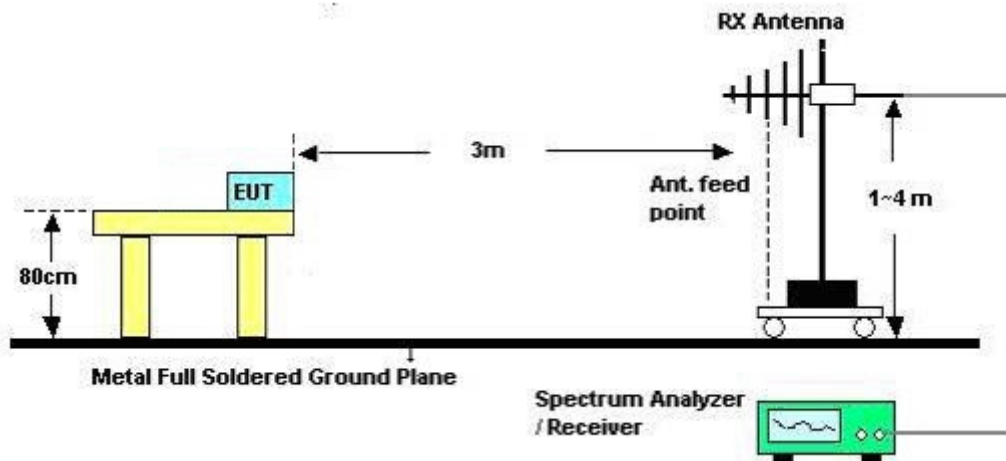

For Radiated Emissions: Above 1GHz

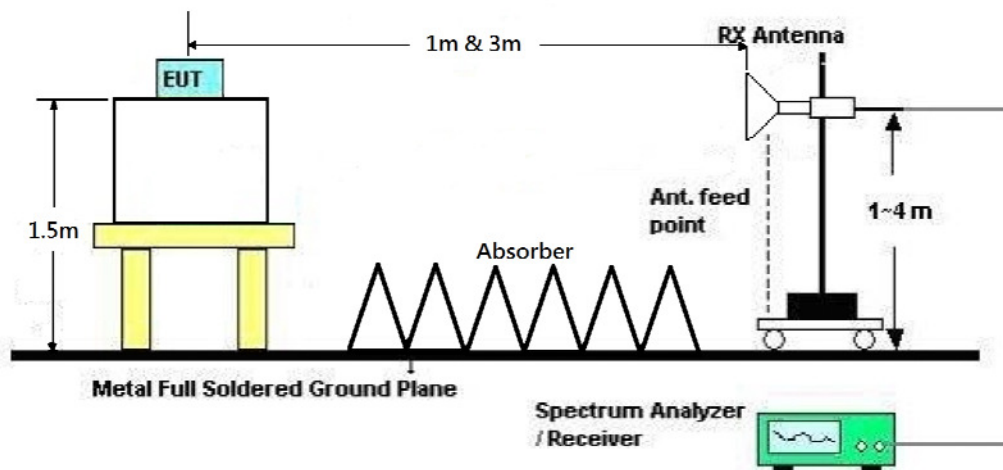

#### 4.6.5. Test Deviation

There is no deviation with the original standard.

#### 4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.7. Results of Radiated Emissions (9kHz~30MHz)

<b>Temperature</b>	20.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	Normal Link
<b>Test Date</b>	Mar. 25, 2016		

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	20.7°C	Humidity	52%
Test Engineer	John Tang	Configurations	Normal Link

Horizontal

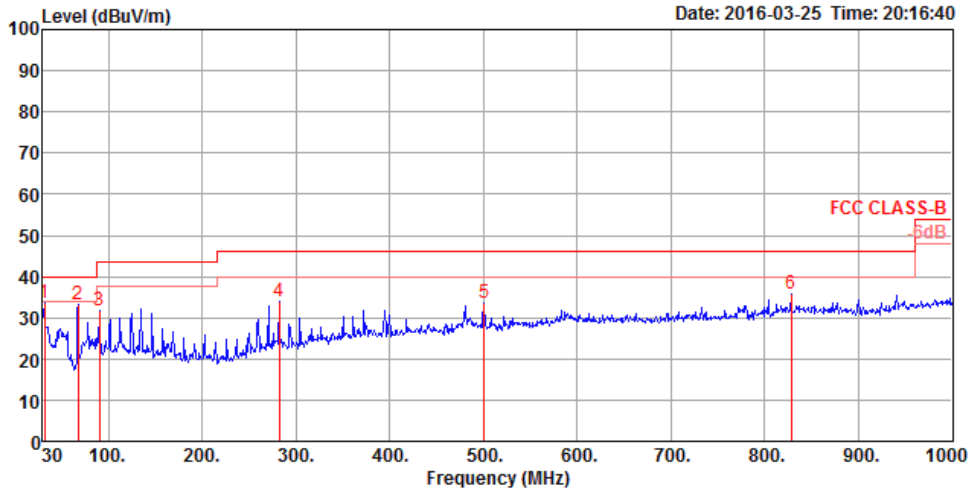

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	31.94	33.55	40.00	-6.45	40.79	0.50	24.66	32.40	150	151 Peak	HORIZONTAL
2	67.83	33.30	40.00	-6.70	51.93	0.71	13.06	32.40	200	92 Peak	HORIZONTAL
3	90.14	31.74	43.50	-11.76	47.74	0.82	15.57	32.39	200	99 Peak	HORIZONTAL
4	282.20	33.94	46.00	-12.06	45.08	1.43	19.72	32.29	150	56 Peak	HORIZONTAL
5	500.45	33.42	46.00	-12.58	39.80	1.94	24.03	32.35	200	15 Peak	HORIZONTAL
6	828.31	35.80	46.00	-10.20	38.28	2.49	27.13	32.10	125	192 Peak	HORIZONTAL

**Vertical**

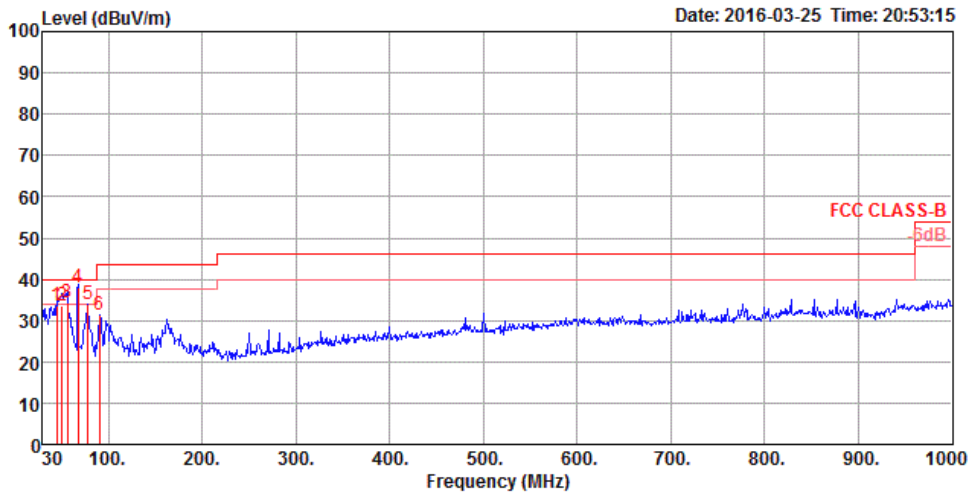

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	44.55	33.42	40.00	-6.58	47.87	0.59	17.37	32.41	100	358 QP	VERTICAL
2	50.37	33.51	40.00	-6.49	50.46	0.61	14.85	32.41	100	328 QP	VERTICAL
3	56.19	34.15	40.00	-5.85	51.76	0.66	14.14	32.41	150	349 QP	VERTICAL
4	67.83	37.87	40.00	-2.13	56.50	0.71	13.06	32.40	200	5 QP	VERTICAL
5	78.50	33.95	40.00	-6.05	52.09	0.77	13.49	32.40	100	252 Peak	VERTICAL
6	90.14	31.36	43.50	-12.14	47.36	0.82	15.57	32.39	125	24 Peak	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

#### 4.6.9. Results for Radiated Emissions (1GHz~40GHz)

<b>Temperature</b>	21°C	<b>Humidity</b>	59%
<b>Test Engineer</b>	Eason Chen	<b>Configurations</b>	IEEE 802.11a CH 36 / Ant. 1 + Ant. 2
<b>Test Date</b>	Mar. 03, 2016		

##### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15537.00	61.63	74.00	-12.37	45.54	13.19	38.25	35.35	160	9	Peak	HORIZONTAL
2	15541.76	48.88	54.00	-5.12	32.79	13.19	38.25	35.35	160	9	Average	HORIZONTAL

##### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15537.28	61.67	74.00	-12.33	45.58	13.19	38.25	35.35	185	356	Peak	VERTICAL
2	15542.68	48.76	54.00	-5.24	32.67	13.19	38.25	35.35	185	356	Average	VERTICAL





<b>Temperature</b>	21°C	<b>Humidity</b>	59%
<b>Test Engineer</b>	Eason Chen	<b>Configurations</b>	IEEE 802.11a CH 40 / Ant. 1 + Ant. 2
<b>Test Date</b>	Mar. 03, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15602.72	50.24	54.00	-3.76	34.23	13.23	38.14	35.36	198	341	Average	HORIZONTAL
2	15606.68	62.51	74.00	-11.49	46.50	13.23	38.14	35.36	198	341	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15594.72	66.74	74.00	-7.26	50.70	13.21	38.19	35.36	199	142	Peak	VERTICAL
2	15603.48	52.92	54.00	-1.08	36.91	13.23	38.14	35.36	199	142	Average	VERTICAL



<b>Temperature</b>	21°C	<b>Humidity</b>	59%
<b>Test Engineer</b>	Eason Chen	<b>Configurations</b>	IEEE 802.11a CH 48 / Ant. 1 + Ant. 2
<b>Test Date</b>	Mar. 03, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15715.72	62.04	74.00	-11.96	46.13	13.26	38.03	35.38	197	36	Peak	HORIZONTAL
2	15718.92	49.13	54.00	-4.87	33.22	13.26	38.03	35.38	197	36	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15720.08	52.36	54.00	-1.64	36.45	13.26	38.03	35.38	194	337	Average	VERTICAL
2	15724.08	66.04	74.00	-7.96	50.13	13.26	38.03	35.38	194	337	Peak	VERTICAL

<b>Temperature</b>	21°C	<b>Humidity</b>	59%
<b>Test Engineer</b>	Eason Chen	<b>Configurations</b>	IEEE 802.11a CH 149 / Ant. 1 + Ant. 2
<b>Test Date</b>	Mar. 03, 2016		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11482.44	46.51	54.00	-7.49	30.02	11.71	40.01	35.23	193	256	Average	HORIZONTAL
2	11489.20	58.67	74.00	-15.33	42.18	11.72	40.00	35.23	193	256	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11485.36	46.70	54.00	-7.30	30.21	11.72	40.00	35.23	200	100	Average	VERTICAL
2	11493.92	59.39	74.00	-14.61	42.90	11.72	40.00	35.23	200	100	Peak	VERTICAL

<b>Temperature</b>	21°C	<b>Humidity</b>	59%
<b>Test Engineer</b>	Eason Chen	<b>Configurations</b>	IEEE 802.11a CH 157 / Ant. 1 + Ant. 2
<b>Test Date</b>	Mar. 03, 2016		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11564.92	45.41	54.00	-8.59	29.02	11.75	39.87	35.23	176	174	Average	HORIZONTAL
2	11574.08	57.99	74.00	-16.01	41.60	11.75	39.87	35.23	176	174	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11570.16	46.26	54.00	-7.74	29.87	11.75	39.87	35.23	224	83	Average	VERTICAL
2	11570.24	59.17	74.00	-14.83	42.78	11.75	39.87	35.23	224	83	Peak	VERTICAL



<b>Temperature</b>	21°C	<b>Humidity</b>	59%
<b>Test Engineer</b>	Eason Chen	<b>Configurations</b>	IEEE 802.11a CH 165 / Ant. 1 + Ant. 2
<b>Test Date</b>	Mar. 03, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11652.84	45.53	54.00	-8.47	29.28	11.80	39.67	35.22	182	83	Average	HORIZONTAL
2	11653.80	59.08	74.00	-14.92	42.83	11.80	39.67	35.22	182	83	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11650.92	45.97	54.00	-8.03	29.72	11.80	39.67	35.22	184	208	Average	VERTICAL
2	11656.20	58.02	74.00	-15.98	41.77	11.80	39.67	35.22	184	208	Peak	VERTICAL



<b>Temperature</b>	21°C	<b>Humidity</b>	59%
<b>Test Engineer</b>	Eason Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Ant. 1 + Ant. 2
<b>Test Date</b>	Mar. 03, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15532.68	48.52	54.00	-5.48	32.43	13.19	38.25	35.35	185	160 Average	HORIZONTAL
2	15534.20	61.63	74.00	-12.37	45.54	13.19	38.25	35.35	185	160 Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15537.28	61.04	74.00	-12.96	44.95	13.19	38.25	35.35	205	347 Peak	VERTICAL
2	15539.16	48.59	54.00	-5.41	32.50	13.19	38.25	35.35	205	347 Average	VERTICAL



<b>Temperature</b>	21°C	<b>Humidity</b>	59%
<b>Test Engineer</b>	Eason Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Ant. 1 + Ant. 2
<b>Test Date</b>	Mar. 03, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15598.68	64.60	74.00	-9.40	48.56	13.21	38.19	35.36	205	117	Peak	HORIZONTAL
2	15603.20	50.83	54.00	-3.17	34.82	13.23	38.14	35.36	205	117	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15600.80	67.01	74.00	-6.99	51.00	13.23	38.14	35.36	203	4	Peak	VERTICAL
2	15603.08	53.59	54.00	-0.41	37.58	13.23	38.14	35.36	203	4	Average	VERTICAL



<b>Temperature</b>	21°C	<b>Humidity</b>	59%
<b>Test Engineer</b>	Eason Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Ant. 1 + Ant. 2
<b>Test Date</b>	Mar. 03, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15562.44	48.20	54.00	-5.80	32.16	13.21	38.19	35.36	177	156	Average	HORIZONTAL
2	15577.68	61.30	74.00	-12.70	45.26	13.21	38.19	35.36	177	156	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15716.60	63.20	74.00	-10.80	47.29	13.26	38.03	35.38	205	40	Peak	VERTICAL
2	15723.20	49.68	54.00	-4.32	33.77	13.26	38.03	35.38	205	40	Average	VERTICAL





<b>Temperature</b>	21°C	<b>Humidity</b>	59%
<b>Test Engineer</b>	Eason Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149 / Ant. 1 + Ant. 2
<b>Test Date</b>	Mar. 03, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11495.44	45.75	54.00	-8.25	29.26	11.72	40.00	35.23	209	242	Average	HORIZONTAL
2	11496.96	58.39	74.00	-15.61	41.90	11.72	40.00	35.23	209	242	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11486.04	58.64	74.00	-15.36	42.15	11.72	40.00	35.23	188	144	Peak	VERTICAL
2	11487.96	46.15	54.00	-7.85	29.66	11.72	40.00	35.23	188	144	Average	VERTICAL



<b>Temperature</b>	21°C	<b>Humidity</b>	59%
<b>Test Engineer</b>	Eason Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 157 / Ant. 1 + Ant. 2
<b>Test Date</b>	Mar. 03, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11560.12	58.02	74.00	-15.98	41.63	11.75	39.87	35.23	154	42	Peak	HORIZONTAL
2	11574.48	45.43	54.00	-8.57	29.04	11.75	39.87	35.23	154	42	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11575.96	45.21	54.00	-8.79	28.82	11.75	39.87	35.23	169	114	Average	VERTICAL
2	11576.16	57.49	74.00	-16.51	41.10	11.75	39.87	35.23	169	114	Peak	VERTICAL



<b>Temperature</b>	21°C	<b>Humidity</b>	59%
<b>Test Engineer</b>	Eason Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 165 / Ant. 1 + Ant. 2
<b>Test Date</b>	Mar. 03, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11642.08	58.21	74.00	-15.79	41.92	11.78	39.73	35.22	149	209	Peak	HORIZONTAL
2	11660.00	45.70	54.00	-8.30	29.45	11.80	39.67	35.22	149	209	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11644.24	58.40	74.00	-15.60	42.11	11.78	39.73	35.22	163	116	Peak	VERTICAL
2	11656.56	45.62	54.00	-8.38	29.37	11.80	39.67	35.22	163	116	Average	VERTICAL



<b>Temperature</b>	21°C	<b>Humidity</b>	59%
<b>Test Engineer</b>	Eason Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Ant. 1 + Ant. 2
<b>Test Date</b>	Mar. 03, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15561.76	60.72	74.00	-13.28	44.68	13.21	38.19	35.36	143	283	Peak	HORIZONTAL
2	15564.68	48.24	54.00	-5.76	32.20	13.21	38.19	35.36	143	283	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15562.88	48.28	54.00	-5.72	32.24	13.21	38.19	35.36	198	116	Average	VERTICAL
2	15566.96	60.69	74.00	-13.31	44.65	13.21	38.19	35.36	198	116	Peak	VERTICAL



<b>Temperature</b>	21°C	<b>Humidity</b>	59%
<b>Test Engineer</b>	Eason Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Ant. 1 + Ant. 2
<b>Test Date</b>	Mar. 03, 2016		

**Horizontal**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	dB	cm	deg		
1	15680.72	49.14	54.00	-4.86	33.18	13.25	38.08	35.37	200	34	Average	HORIZONTAL
2	15697.72	61.63	74.00	-12.37	45.71	13.26	38.03	35.37	200	34	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	dB	cm	deg		
1	15682.84	50.18	54.00	-3.82	34.22	13.25	38.08	35.37	199	332	Average	VERTICAL
2	15692.12	63.48	74.00	-10.52	47.56	13.26	38.03	35.37	199	332	Peak	VERTICAL



<b>Temperature</b>	21°C	<b>Humidity</b>	59%
<b>Test Engineer</b>	Eason Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151 / Ant. 1 + Ant. 2
<b>Test Date</b>	Mar. 03, 2016		

**Horizontal**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11500.28	45.51	54.00	-8.49	29.02	11.72	40.00	35.23	214	222 Average	HORIZONTAL
2	11505.20	58.13	74.00	-15.87	41.64	11.72	40.00	35.23	214	222 Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11503.56	45.45	54.00	-8.55	28.96	11.72	40.00	35.23	194	319 Average	VERTICAL
2	11519.92	57.93	74.00	-16.07	41.49	11.74	39.93	35.23	194	319 Peak	VERTICAL



<b>Temperature</b>	21°C	<b>Humidity</b>	59%
<b>Test Engineer</b>	Eason Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 159 / Ant. 1 + Ant. 2
<b>Test Date</b>	Mar. 03, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11584.92	58.00	74.00	-16.00	41.65	11.77	39.80	35.22	189	166	Peak	HORIZONTAL
2	11598.60	45.31	54.00	-8.69	28.96	11.77	39.80	35.22	189	166	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11589.96	57.85	74.00	-16.15	41.50	11.77	39.80	35.22	200	221	Peak	VERTICAL
2	11596.44	45.48	54.00	-8.52	29.13	11.77	39.80	35.22	200	221	Average	VERTICAL



<b>Temperature</b>	21°C	<b>Humidity</b>	59%
<b>Test Engineer</b>	Eason Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Ant. 1 + Ant. 2
<b>Test Date</b>	Mar. 03, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15637.48	47.73	54.00	-6.27	31.72	13.23	38.14	35.36	167	298	Average	HORIZONTAL
2	15639.24	60.39	74.00	-13.61	44.38	13.23	38.14	35.36	167	298	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15622.44	60.47	74.00	-13.53	44.46	13.23	38.14	35.36	176	70	Peak	VERTICAL
2	15631.60	47.80	54.00	-6.20	31.79	13.23	38.14	35.36	176	70	Average	VERTICAL





<b>Temperature</b>	21°C	<b>Humidity</b>	59%
<b>Test Engineer</b>	Eason Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 155 / Ant. 1 + Ant. 2
<b>Test Date</b>	Mar. 03, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11586.96	45.53	54.00	-8.47	29.18	11.77	39.80	35.22	177	155	Average	HORIZONTAL
2	11588.56	57.92	74.00	-16.08	41.57	11.77	39.80	35.22	177	155	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11517.20	45.68	54.00	-8.32	29.24	11.74	39.93	35.23	183	199	Average	VERTICAL
2	11529.84	58.18	74.00	-15.82	41.74	11.74	39.93	35.23	183	199	Peak	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.7. Band Edge Emissions Measurement

### 4.7.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of  $-17$  dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

### 4.7.3. Test Procedures

1. The test procedure is the same as section 4.6.3.

### 4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

#### 4.7.5. Test Deviation

There is no deviation with the original standard.

#### 4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.7.7. Test Result of Band Edge and Fundamental Emissions

<b>Temperature</b>	21°C	<b>Humidity</b>	59%
<b>Test Engineer</b>	Eason Chen	<b>Configurations</b>	IEEE 802.11a CH 36, 40, 48 / Ant. 1 + Ant. 2
<b>Test Date</b>	Mar. 03, 2016		

##### Channel 36

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5150.00	53.79	54.00	-0.21	47.43	7.78	31.52	32.94	229	351 Average	VERTICAL
2	5150.00	70.81	74.00	-3.19	64.45	7.78	31.52	32.94	229	351 Peak	VERTICAL
3	5178.20	113.14			106.75	7.78	31.55	32.94	229	351 Peak	VERTICAL
4	5179.00	103.75			97.36	7.78	31.55	32.94	229	351 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

##### Channel 40

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5146.80	61.40	74.00	-12.60	55.04	7.78	31.52	32.94	217	350 Peak	VERTICAL
2	5150.00	48.83	54.00	-5.17	42.47	7.78	31.52	32.94	217	350 Average	VERTICAL
3	5200.80	105.16			98.76	7.78	31.56	32.94	217	350 Average	VERTICAL
4	5200.80	114.78			108.38	7.78	31.56	32.94	217	350 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

##### Channel 48

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5141.60	57.12	74.00	-16.88	50.77	7.78	31.51	32.94	230	351 Peak	VERTICAL
2	5147.60	45.52	54.00	-8.48	39.16	7.78	31.52	32.94	230	351 Average	VERTICAL
3	5240.60	115.27			108.84	7.78	31.59	32.94	230	351 Peak	VERTICAL
4	5241.20	105.60			99.17	7.78	31.59	32.94	230	351 Average	VERTICAL
5	5350.00	46.51	54.00	-7.49	39.99	7.77	31.68	32.93	230	351 Average	VERTICAL
6	5387.00	58.61	74.00	-15.39	52.05	7.77	31.72	32.93	230	351 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

<b>Temperature</b>	21°C	<b>Humidity</b>	59%
<b>Test Engineer</b>	Eason Chen	<b>Configurations</b>	IEEE 802.11a CH 149, 157, 165 / Ant. 1 + Ant. 2
<b>Test Date</b>	Mar. 03, 2016		

**Channel 149**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5714.20	65.54	74.00	-8.46	58.46	8.02	32.06	33.00	207	2 Peak	VERTICAL
2	5715.00	49.65	54.00	-4.35	42.57	8.02	32.06	33.00	207	2 Average	VERTICAL
3	5725.00	77.95	78.20	-0.25	70.83	8.04	32.08	33.00	207	2 Peak	VERTICAL
4	5745.80	100.66			93.52	8.06	32.10	33.02	207	2 Average	VERTICAL
5	5746.60	110.04			102.90	8.06	32.10	33.02	207	2 Peak	VERTICAL

Item 4, 5 are the fundamental frequency at 5745 MHz.

**Channel 157**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5690.20	58.04	74.00	-15.96	50.99	8.01	32.04	33.00	191	5 Peak	VERTICAL
2	5713.40	46.47	54.00	-7.53	39.39	8.02	32.06	33.00	191	5 Average	VERTICAL
3	5723.00	60.16	78.20	-18.04	53.04	8.04	32.08	33.00	191	5 Peak	VERTICAL
4	5783.40	112.16			104.95	8.10	32.14	33.03	191	5 Peak	VERTICAL
5	5786.20	102.55			95.34	8.10	32.14	33.03	191	5 Average	VERTICAL
6	5855.80	60.30	78.20	-17.90	52.95	8.18	32.22	33.05	191	5 Peak	VERTICAL
7	5865.40	47.49	54.00	-6.51	40.12	8.19	32.24	33.06	191	5 Average	VERTICAL
8	5878.60	59.91	74.00	-14.09	52.51	8.21	32.26	33.07	191	5 Peak	VERTICAL

Item 4, 5 are the fundamental frequency at 5785 MHz.

**Channel 165**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5825.80	110.62			103.31	8.16	32.20	33.05	246	291 Peak	VERTICAL
2	5826.20	100.92			93.61	8.16	32.20	33.05	246	291 Average	VERTICAL
3	5852.20	77.94	78.20	-0.26	70.59	8.18	32.22	33.05	246	291 Peak	VERTICAL
4	5860.00	51.32	54.00	-2.68	43.95	8.19	32.24	33.06	246	291 Average	VERTICAL
5	5860.60	66.70	74.00	-7.30	59.33	8.19	32.24	33.06	246	291 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5825 MHz.

<b>Temperature</b>	21°C	<b>Humidity</b>	59%
<b>Test Engineer</b>	Eason Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36, 40, 48 / Ant. 1 + Ant. 2
<b>Test Date</b>	Mar. 03, 2016		

### Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5150.00	53.72	54.00	-0.28	47.36	7.78	31.52	32.94	225	0 Average	VERTICAL
2	5150.00	72.42	74.00	-1.58	66.06	7.78	31.52	32.94	225	0 Peak	VERTICAL
3	5180.60	102.43			96.04	7.78	31.55	32.94	225	0 Average	VERTICAL
4	5182.00	112.05			105.66	7.78	31.55	32.94	225	0 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

### Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5149.60	71.72	74.00	-2.28	65.36	7.78	31.52	32.94	212	1 Peak	VERTICAL
2	5150.00	49.90	54.00	-4.10	43.54	7.78	31.52	32.94	212	1 Average	VERTICAL
3	5196.80	114.66			108.26	7.78	31.56	32.94	212	1 Peak	VERTICAL
4	5200.80	104.63			98.23	7.78	31.56	32.94	212	1 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

### Channel 48

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5101.40	57.31	74.00	-16.69	50.99	7.78	31.48	32.94	213	3 Peak	VERTICAL
2	5117.00	45.55	54.00	-8.45	39.21	7.78	31.50	32.94	213	3 Average	VERTICAL
3	5238.80	114.91			108.48	7.78	31.59	32.94	213	3 Peak	VERTICAL
4	5240.60	105.10			98.67	7.78	31.59	32.94	213	3 Average	VERTICAL
5	5351.60	58.88	74.00	-15.12	52.36	7.77	31.68	32.93	213	3 Peak	VERTICAL
6	5383.40	46.15	54.00	-7.85	39.61	7.77	31.70	32.93	213	3 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

<b>Temperature</b>	21°C	<b>Humidity</b>	59%
<b>Test Engineer</b>	Eason Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149, 157, 165 / Ant. 1 + Ant. 2
<b>Test Date</b>	Mar. 03, 2016		

**Channel 149**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5714.60	61.35	74.00	-12.65	54.27	8.02	32.06	33.00	208	3 Peak	VERTICAL
2	5715.00	47.64	54.00	-6.36	40.56	8.02	32.06	33.00	208	3 Average	VERTICAL
3	5724.60	78.15	78.20	-0.05	71.03	8.04	32.08	33.00	208	3 Peak	VERTICAL
4	5743.80	98.78			91.63	8.06	32.10	33.01	208	3 Average	VERTICAL
5	5746.20	109.00			101.86	8.06	32.10	33.02	208	3 Peak	VERTICAL

Item 4, 5 are the fundamental frequency at 5745 MHz.

**Channel 157**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5712.20	57.74	74.00	-16.26	50.66	8.02	32.06	33.00	214	3 Peak	VERTICAL
2	5715.00	46.44	54.00	-7.56	39.36	8.02	32.06	33.00	214	3 Average	VERTICAL
3	5722.60	61.25	78.20	-16.95	54.13	8.04	32.08	33.00	214	3 Peak	VERTICAL
4	5782.20	113.21			106.00	8.10	32.14	33.03	214	3 Peak	VERTICAL
5	5783.00	103.07			95.86	8.10	32.14	33.03	214	3 Average	VERTICAL
6	5850.00	59.54	78.20	-18.66	52.19	8.18	32.22	33.05	214	3 Peak	VERTICAL
7	5870.20	47.54	54.00	-6.46	40.17	8.19	32.24	33.06	214	3 Average	VERTICAL
8	5876.60	60.04	74.00	-13.96	52.63	8.21	32.26	33.06	214	3 Peak	VERTICAL

Item 4, 5 are the fundamental frequency at 5785 MHz.

**Channel 165**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5825.40	100.38			93.07	8.16	32.20	33.05	246	300 Average	VERTICAL
2	5827.00	110.45			103.14	8.16	32.20	33.05	246	300 Peak	VERTICAL
3	5850.00	78.10	78.20	-0.10	70.75	8.18	32.22	33.05	246	300 Peak	VERTICAL
4	5860.00	51.12	54.00	-2.88	43.75	8.19	32.24	33.06	246	300 Average	VERTICAL
5	5861.40	66.97	74.00	-7.03	59.60	8.19	32.24	33.06	246	300 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5825 MHz.

<b>Temperature</b>	21°C	<b>Humidity</b>	59%
<b>Test Engineer</b>	Eason Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38, 46 / Ant. 1 + Ant. 2
<b>Test Date</b>	Mar. 03, 2016		

### Channel 38

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5148.40	68.21	74.00	-5.79	61.85	7.78	31.52	32.94	221	0 Peak	VERTICAL
2	5150.00	53.85	54.00	-0.15	47.49	7.78	31.52	32.94	221	0 Average	VERTICAL
3	5188.40	104.70			98.30	7.78	31.56	32.94	221	0 Peak	VERTICAL
4	5188.80	95.43			89.03	7.78	31.56	32.94	221	0 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

### Channel 46

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5149.00	73.45	74.00	-0.55	67.09	7.78	31.52	32.94	243	360 Peak	VERTICAL
2	5150.00	53.80	54.00	-0.20	47.44	7.78	31.52	32.94	243	360 Average	VERTICAL
3	5228.80	111.94			105.52	7.78	31.58	32.94	243	360 Peak	VERTICAL
4	5231.20	101.83			95.41	7.78	31.58	32.94	243	360 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.





<b>Temperature</b>	21°C	<b>Humidity</b>	59%
<b>Test Engineer</b>	Eason Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151, 159 / Ant. 1 + Ant. 2
<b>Test Date</b>	Mar. 03, 2016		

**Channel 151**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5714.20	68.11	68.20	-0.09	61.03	8.02	32.06	33.00	217	2	Peak	VERTICAL
2	5720.60	75.44	78.20	-2.76	68.36	8.02	32.06	33.00	217	2	Peak	VERTICAL
3	5751.00	104.16			97.02	8.06	32.10	33.02	217	2	Peak	VERTICAL
4	5753.80	94.54			87.40	8.06	32.10	33.02	217	2	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5755 MHz.

**Channel 159**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5714.00	64.87	68.20	-3.33	57.79	8.02	32.06	33.00	214	3	Peak	VERTICAL
2	5723.00	69.65	78.20	-8.55	62.53	8.04	32.08	33.00	214	3	Peak	VERTICAL
3	5793.00	109.61			102.36	8.12	32.16	33.03	214	3	Peak	VERTICAL
4	5796.00	99.56			92.31	8.12	32.16	33.03	214	3	Average	VERTICAL
5	5850.00	74.98	78.20	-3.22	67.63	8.18	32.22	33.05	214	3	Peak	VERTICAL
6	5860.00	67.91	68.20	-0.29	60.54	8.19	32.24	33.06	214	3	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5795 MHz.

<b>Temperature</b>	21°C	<b>Humidity</b>	59%
<b>Test Engineer</b>	Eason Chen	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42, 155 / Ant. 1 + Ant. 2
<b>Test Date</b>	Mar. 03, 2016		

### Channel 42

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5143.00	53.51	54.00	-0.49	47.15	7.78	31.52	32.94	210	360	Average	VERTICAL
2	5147.00	65.31	74.00	-8.69	58.95	7.78	31.52	32.94	210	360	Peak	VERTICAL
3	5203.00	100.56			94.15	7.78	31.57	32.94	210	360	Peak	VERTICAL
4	5214.00	91.21			84.80	7.78	31.57	32.94	210	360	Average	VERTICAL
5	5356.00	47.36	54.00	-6.64	40.83	7.77	31.69	32.93	210	360	Average	VERTICAL
6	5412.00	58.97	74.00	-15.03	52.39	7.78	31.73	32.93	210	360	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

### Channel 155

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5713.00	68.13	68.20	-0.07	61.05	8.02	32.06	33.00	215	2	Peak	VERTICAL
2	5725.00	70.79	78.20	-7.41	63.67	8.04	32.08	33.00	215	2	Peak	VERTICAL
3	5768.00	100.15			92.98	8.08	32.12	33.03	215	2	Peak	VERTICAL
4	5774.00	90.35			83.14	8.10	32.14	33.03	215	2	Average	VERTICAL
5	5850.00	63.27	78.20	-14.93	55.92	8.18	32.22	33.05	215	2	Peak	VERTICAL
6	5861.00	62.64	68.20	-5.56	55.27	8.19	32.24	33.06	215	2	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5775 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

## 4.8. Frequency Stability Measurement

### 4.8.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be  $\pm 20$  ppm maximum for the 5 GHz band (IEEE 802.11n specification).

### 4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

### 4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f) / f_c \times 10^6$  ppm and the limit is less than  $\pm 20$  ppm (IEEE 802.11n specification).
6. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
7. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
8. Extreme temperature is  $0^\circ\text{C} \sim 40^\circ\text{C}$ .

### 4.8.4. Test Setup Layout

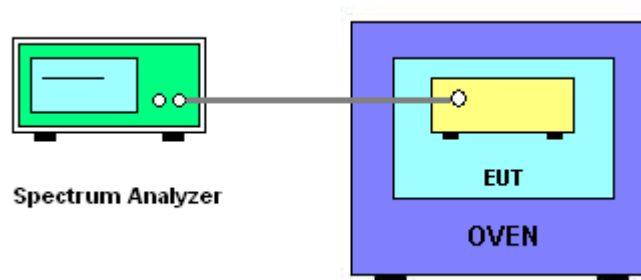

#### 4.8.5. Test Deviation

There is no deviation with the original standard.

#### 4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

#### 4.8.7. Test Result of Frequency Stability

<b>Temperature</b>	21°C	<b>Humidity</b>	59%
<b>Test Engineer</b>	Peter Wu	<b>Test Date</b>	Mar. 30, 2016 ~ May 03, 2016

Mode: 20 MHz / Ant. 2

##### Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)			
	5200 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5200.0148	5200.0141	5200.0140	5200.0130
110.00	5200.0140	5200.0130	5200.0124	5200.0123
93.50	5200.0137	5200.0136	5200.0130	5200.0128
Max. Deviation (MHz)	0.0148	0.0141	0.0140	0.0130
Max. Deviation (ppm)	2.85	2.71	2.69	2.50
Result	Complies			

##### Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)			
	5200 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5200.0167	5200.0157	5200.0153	5200.0150
10	5200.0147	5200.0138	5200.0131	5200.0122
20	5200.0140	5200.0135	5200.0133	5200.0129
30	5200.0089	5200.0080	5200.0073	5200.0064
40	5200.0069	5200.0066	5200.0060	5200.0056
Max. Deviation (MHz)	0.0192	0.0190	0.0188	0.0181
Max. Deviation (ppm)	3.69	3.65	3.62	3.48
Result	Complies			

**Voltage vs. Frequency Stability**

Voltage	Measurement Frequency (MHz)			
(V)	5785 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5785.0002	5784.9992	5784.9985	5784.9980
110.00	5784.9998	5784.9989	5784.9987	5784.9981
93.50	5784.9991	5784.9987	5784.9977	5784.9972
Max. Deviation (MHz)	0.0009	0.0013	0.0023	0.0028
Max. Deviation (ppm)	0.16	0.22	0.40	0.48
Result	Complies			

**Temperature vs. Frequency Stability**

Temperature	Measurement Frequency (MHz)			
(°C)	5785 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5784.9976	5784.9964	5784.9945	5784.9923
10	5784.9963	5784.9950	5784.9935	5784.9917
20	5784.9951	5784.9938	5784.9922	5784.9903
30	5784.9937	5784.9926	5784.9912	5784.9896
40	5784.9921	5784.9906	5784.9890	5784.9870
Max. Deviation (MHz)	0.0096	0.0108	0.0123	0.0150
Max. Deviation (ppm)	1.66	1.87	2.13	2.59
Result	Complies			

Mode: 40 MHz / Ant. 2

**Voltage vs. Frequency Stability**

Voltage	Measurement Frequency (MHz)			
(V)	5190 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5190.0149	5190.0144	5190.0140	5190.0132
110.00	5190.0140	5190.0135	5190.0130	5190.0122
93.50	5190.0139	5190.0132	5190.0129	5190.0122
Max. Deviation (MHz)	0.0149	0.0144	0.0140	0.0132
Max. Deviation (ppm)	2.87	2.77	2.70	2.54
Result	Complies			

**Temperature vs. Frequency Stability**

Temperature	Measurement Frequency (MHz)			
(°C)	5190 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5190.0160	5190.0156	5190.0154	5190.0144
10	5190.0148	5190.0143	5190.0133	5190.0127
20	5190.0140	5190.0135	5190.0130	5190.0121
30	5190.0089	5190.0081	5190.0079	5190.0070
40	5190.0083	5190.0080	5190.0079	5190.0076
Max. Deviation (MHz)	0.0181	0.0176	0.0174	0.0173
Max. Deviation (ppm)	3.49	3.39	3.35	3.33
Result	Complies			

**Voltage vs. Frequency Stability**

Voltage	Measurement Frequency (MHz)			
(V)	5755 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5754.9920	5754.9916	5754.9910	5754.9900
110.00	5754.9915	5754.9910	5754.9907	5754.9901
93.50	5754.9907	5754.9902	5754.9898	5754.9890
Max. Deviation (MHz)	0.0093	0.0098	0.0102	0.0110
Max. Deviation (ppm)	1.62	1.70	1.77	1.91
Result	Complies			

**Temperature vs. Frequency Stability**

Temperature	Measurement Frequency (MHz)			
(°C)	5755 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5754.9950	5754.9938	5754.9919	5754.9897
10	5754.9937	5754.9924	5754.9909	5754.9891
20	5754.9925	5754.9912	5754.9896	5754.9877
30	5754.9911	5754.9900	5754.9886	5754.9870
40	5754.9895	5754.9880	5754.9864	5754.9844
Max. Deviation (MHz)	0.0122	0.0134	0.0149	0.0176
Max. Deviation (ppm)	2.12	2.33	2.59	3.06
Result	Complies			

Mode: 80 MHz / Ant. 2

**Voltage vs. Frequency Stability**

Voltage	Measurement Frequency (MHz)			
(V)	5210 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5210.0144	5210.0135	5210.0130	5210.0126
110.00	5210.0140	5210.0134	5210.0131	5210.0128
93.50	5210.0137	5210.0127	5210.0123	5210.0120
Max. Deviation (MHz)	0.0144	0.0135	0.0131	0.0128
Max. Deviation (ppm)	2.76	2.59	2.51	2.46
Result	Complies			

**Temperature vs. Frequency Stability**

Temperature	Measurement Frequency (MHz)			
(°C)	5210 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5210.0159	5210.0154	5210.0150	5210.0142
10	5210.0141	5210.0138	5210.0135	5210.0128
20	5210.0140	5210.0138	5210.0134	5210.0127
30	5210.0089	5210.0080	5210.0079	5210.0073
40	5210.0075	5210.0073	5210.0065	5210.0063
Max. Deviation (MHz)	0.0182	0.0176	0.0167	0.0159
Max. Deviation (ppm)	3.49	3.38	3.21	3.05
Result	Complies			



**Voltage vs. Frequency Stability**

Voltage	Measurement Frequency (MHz)			
(V)	5775 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5774.9947	5774.9946	5774.9939	5774.9934
110.00	5774.9938	5774.9934	5774.9932	5774.9928
93.50	5774.9931	5774.9928	5774.9921	5774.9915
Max. Deviation (MHz)	0.0069	0.0072	0.0079	0.0085
Max. Deviation (ppm)	1.19	1.25	1.37	1.47
Result	Complies			

**Temperature vs. Frequency Stability**

Temperature	Measurement Frequency (MHz)			
(°C)	5775 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5774.9950	5774.9938	5774.9919	5774.9897
10	5774.9937	5774.9924	5774.9909	5774.9891
20	5774.9925	5774.9912	5774.9896	5774.9877
30	5774.9911	5774.9900	5774.9886	5774.9870
40	5774.9895	5774.9880	5774.9864	5774.9844
Max. Deviation (MHz)	0.0122	0.0134	0.0149	0.0176
Max. Deviation (ppm)	2.11	2.32	2.58	3.05
Result	Complies			

## 4.9. Antenna Requirements

### 4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Nov. 16, 2015	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Nov. 13, 2015	Conduction (CO02-CB)
EMI Receiver	Agilent	N9038A	MY52260140	9kHz ~ 8.4GHz	Jan. 18, 2016	Conduction (CO02-CB)
COND Cable	Woken	Cable	01	0.15MHz ~ 30MHz	Dec. 01, 2015	Conduction (CO02-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Nov. 16, 2015	Conduction (CO02-CB)
BILOG ANTENNA	Schaffner	CBL6112D	37880	20MHz ~ 2GHz	Sep. 03, 2015	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 16, 2016*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Mar. 15, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 18, 2016	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 13, 2015	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
EMI Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8.4GHz	Jan. 27, 2016	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-10-7	N/A	N/A	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 09, 2015	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 02, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

\*Calibration Interval of instruments listed above is two year.

NCR means Non-Calibration required.

## 6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%