



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Wireless-G ADSL2+ IAD Gateway

Model: WAG310G

Trade Name: Linksys

Issued to

**Cisco-Linksys LLC
121 Theory Drive
Irvine, CA 92617(USA)**

Issued by

**Compliance Certification Services Inc.
No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang,
Taoyuan Hsien, (338) Taiwan, R.O.C.
<http://www.ccsemc.com.tw>
service@tw.ccsemc.com**



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



TABLE OF CONTENTS

- 1. TEST RESULT CERTIFICATION.....3**
- 2. EUT DESCRIPTION4**
- 3. TEST METHODOLOGY5**
 - 3.1 EUT CONFIGURATION5
 - 3.2 EUT EXERCISE.....5
 - 3.3 GENERAL TEST PROCEDURES.....5
 - 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....6
 - 3.5 DESCRIPTION OF TEST MODES7
- 4. INSTRUMENT CALIBRATION.....8**
 - 4.1 MEASURING INSTRUMENT CALIBRATION.....8
 - 4.2 MEASUREMENT EQUIPMENT USED.....8
- 5. FACILITIES AND ACCREDITATIONS9**
 - 5.1 FACILITIES9
 - 5.2 EQUIPMENT.....9
 - 5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....10
- 6. SETUP OF EQUIPMENT UNDER TEST11**
 - 6.1 SETUP CONFIGURATION OF EUT.....11
 - 6.2 SUPPORT EQUIPMENT11
- 7. FCC PART 15.247 REQUIREMENTS.....12**
 - 7.1 6DB BANDWIDTH.....12
 - 7.2 PEAK POWER.....17
 - 7.3 AVERAGE POWER.....21
 - 7.4 BAND EDGES MEASUREMENT.....25
 - 7.5 PEAK POWER SPECTRAL DENSITY.....34
 - 7.6 SPURIOUS EMISSIONS39
 - 7.7 POWERLINE CONDUCTED EMISSIONS.....53
- APPENDIX I RADIO FREQUENCY EXPOSURE.....56**
- APPENDIX II PHOTOGRAPHS OF TEST SETUP58**



1. TEST RESULT CERTIFICATION

Applicant: Cisco-Linksys LLC
 121 Theory Drive
 Irvine, CA 92617(USA)

Equipment Under Test: Wireless-G ADSL2+ IAD Gateway

Trade Name: Linksys

Model: WAG310G

Date of Test: June 15 ~ July 27, 2007

| APPLICABLE STANDARDS | |
|--|-------------------------|
| STANDARD | TEST RESULT |
| FCC 47 CFR Part 15 Subpart C | No non-compliance noted |
| Deviation from Applicable Standard | |
| The Powerline Conducted Emissions was tested at Compliance Certification Services. (Hsintien Lab.) The test equipments were listed in page 8 and the test data were recorded in page 54~55. | |

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Johnny Liu
 Section Manager
 Compliance Certification Services Inc.

Reviewed by:

Amanda Wu
 Section Manager
 Compliance Certification Services Inc.



2. EUT DESCRIPTION

| | |
|------------------------------|---|
| Product | Wireless-G ADSL2+ IAD Gateway |
| Trade Name | Linksys |
| Model Number | WAG310G |
| Model Discrepancy | N/A |
| Power Adapter | Trade name / Model number: LINKSYS / DSA-30W-12 US I/P: 100-240V, 50-60Hz, 0.8A O/P: 12V, 2A |
| Frequency Range | 2412 ~ 2462 MHz |
| Transmit Power | IEEE 802.11b: 19.17 dBm IEEE 802.11g: 17.65 dBm |
| Modulation Technique | IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: DSSS (CCK, DQPSK, DBPSK) + OFDM (QPSK, BPSK, 16-QAM, 64-QAM) |
| Transmit Data Rate | IEEE 802.11b: 11, 5.5, 2, 1 Mbps IEEE 802.11g: 54, 48, 36, 24, 18, 12, 11, 9, 6, 5.5, 2, 1 Mbps |
| Number of Channels | 11 Channels |
| Antenna Specification | Gain: 0.8 dBi (with cable loss 1dB) |
| Antenna Designation | Dipole Antenna |

Remark:

1. The sample selected for test was production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **Q87-WAG310G** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|----------------------------|---------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.52525 | 2655 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 156.7 - 156.9 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 162.0125 - 167.17 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 167.72 - 173.2 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 240 - 285 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | 322 - 335.4 | | |

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT (model: WAG310G) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

The worst case data rate is determined as the data rate with highest output power.

IEEE 802.11b mode:

Channel Low(2412MHz), Channel Mid(2437MHz) and Channel High(2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE 802.11g mode:

Channel Low(2412MHz), Channel Mid(2437MHz) and Channel High(2462MHz) with 6Mbps data rate were chosen for full testing.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

| Conducted Emissions Test Site | | | | |
|-------------------------------|--------------|--------|---------------|-----------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| Spectrum Analyzer | Agilent | E4446A | MY43360131 | 01/30/2008 |

| 3M Semi Anechoic Chamber | | | | |
|--------------------------|-----------------|-------------------|----------------------------|-----------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| Spectrum Analyzer | Agilent | E4446A | US42510252 | 08/02/2008 |
| Test Receiver | Rohde&Schwarz | ESCI | 100064 | 11/13/2007 |
| Switch Controller | TRC | Switch Controller | SC94050010 | 05/05/2008 |
| 4 Port Switch | TRC | 4 Port Switch | SC94050020 | 05/05/2008 |
| Horn-Antenna | TRC | HA-0502 | 06 | 06/06/2008 |
| Horn-Antenna | TRC | HA-0801 | 04 | 05/05/2008 |
| Horn-Antenna | TRC | HA-1201A | 01 | 07/10/2008 |
| Horn-Antenna | TRC | HA-1301A | 01 | 07/18/2008 |
| Bilog- Antenna | Sunol Sciences | JB3 | A030205 | 03/09/2008 |
| Turn Table | Max-Full | MFT-120S | T120S940302 | N.C.R. |
| Antenna Tower | Max-Full | MFA-430 | A440940302 | N.C.R. |
| Controller | Max-Full | MF-CM886 | CC-C-1F-13 | N.C.R. |
| Site NSA | CCS | N/A | FCC: 965860 IC: IC 6106 | 09/25/2008 |
| Test S/W | LABVIEW (V 6.1) | | | |

Remark: The measurement uncertainty is less than +/-2.0065dB (30MHz ~ 1GHz), +/-3.0958dB (Above 1GHz) which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

| Powerline Conducted Emissions Test Site | | | | |
|---|--------------|----------------------|---------------|-----------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| TEST RECEIVER | R&S | ESHS20 | 840455/006 | 02/12/2008 |
| LISN (EUT) | SCHWARZBECK | NSLK 8127 | 8127382 | 12/06/2007 |
| LISN | SOLAR | 8012-50-R-24-BN C | 8305114 | 12/26/2007 |
| BNC CABLE | Huber+Suhner | RG-223/U | BNC A2 | 05/13/2008 |
| THERMO-HYGRO METER | TOP | HA-202 | 9303-1 | 02/04/2008 |
| Test S/W | EMI 32.exe | | | |

Remark: The measurement uncertainty is less than +/- 3.4510 dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT







Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 TABLE OF ACCREDITATIONS AND LISTINGS

| Country | Agency | Scope of Accreditation | Logo |
|---------|-----------------|--|---|
| USA | A2LA | EN 55011, EN 55014-1/2, CISPR 11, CISPR 14-1/2, EN 55022, EN 55015, CISPR 22, CISPR 15, AS/NZS 3548, VCCI V3 (2001), CFR 47, FCC Part 15/18, CNS 13783-1, CNS 13439, CNS 13438, CNS 13803, CNS 14115, EN 55024, IEC 801-2, IEC 801-3, IEC 801-4, IEC/EN 61000-3-2, IEC/EN 61000-3-3, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 50081-1/ EN 61000-6-3, EN 50081-2/EN 61000-6-4, EN 50081-2/EN 61000-6-1: 2001 |  ACCREDITED No. 0824-01 |
| USA | FCC | 3/10 meter Open Area Test Sites (93105, 90471) / 3M Semi Anechoic Chamber (965860) to perform FCC Part 15/18 measurements |  93105, 90471 965860 |
| Japan | VCCI | 3/10 meter Open Area Test Sites to perform conducted/radiated measurements | VCCI R-393/1066/725/879 C-402/747/912 |
| Norway | NEMKO | EN 50081-1/2, EN 50082-1/2, IEC 61000-6-1/2, EN 50091-2, EN 50130-4, EN 55011, EN 55013, EN 55014-1/2, EN 55015, EN 55022, EN 55024, EN 61000-3-2/3, EN 61326-1, IEC 61000-4-2/3/4/5/6/8/11, EN 60601-1-2, EN 300 328, EN 300 422-2, EN 301 419-1, EN 301 489-01/03/07/08/09/17, EN 301 419-2/3, EN 300 454-2, EN 301 357-2 |  ELA 124a ELA 124b ELA 124c |
| Taiwan | TAF | EN 300 328, EN 300 220-1, EN 300 220-2, EN 300 220-3, 47 CFR FCC Part 15 Subpart C, EN 61000-3-2, EN 61000-3-3, CNS 13439, CNS 13783-1, CNS 14115, CNS 13438, AS/NZS CISPR 22, CNS 13022-1, IEC 61000-4-2/3/4/5/6/8/11, CNS 13022-2/3 |  Testing Laboratory 0363 |
| Taiwan | BSMI | CNS 13438, CNS 13783-1, CNS 13439, CNS 14115 |  SL2-IS-E-0014 SL2-IN-E-0014 SL2-A1-E-0014 SL2-R1-E-0014 SL2-R2-E-0014 SL2-L1-E-0014 |
| Canada | Industry Canada | 3/10 meter Open Area Test Sites (IC 2324C-3, IC 2324C-5) / 3M Semi Anechoic Chamber (IC 6106) |  IC 2324C-3 IC 2324C-5 IC 6106 |

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

| No. | Device Type | Brand | Model | Series No. | FCC ID | Data Cable | Power Cord |
|-----|-------------------------|------------------|-------------|-------------------|---|----------------------------------|---|
| 1. | Notebook PC | Sony | PCG-6GFP | 00045-578-554-578 | WLAN: ETC094LPD0155 Bluetooth: ETC094LPD0156 | N/A | AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core |
| 2. | Notebook PC (Remote) | Dell | PP05L | 7T390 A03 | E2K5HCKT | N/A | AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core |
| 3. | PC | HP | WX4400 | SGH7040M5J | BSMI: R33001 | Shielded, 1.8m with two cores | Unshielded, 1.8m |
| 4. | LCD Monitor | SAMSUNG | 710V | GS17H9NXA05853A | FCC DoC BSMI: R33475 | Shielded, 1.0m | Unshielded, 1.8m |
| 5. | Printer | EPSON | C20SX | N/A | BSMI ID: 3902E004 | Shielded, 1.8m | Unshielded, 1.8m |
| 6. | Modem | TOP- SOLUTION | 5JEG4033MKO | N/A | 5RJTAI-35500-M5-E | Shielded, 1.45m | Unshielded, 1.8m |
| 7. | Telephone | KOKA | TP-318 | N/A | N/A | Unshielded, 1.5m | N/A |
| 8. | Telephone | SHIN-KAN-SEN | HIT-213 | N/A | N/A | Unshielded, 1.5m | N/A |
| 9. | Telephone | SHIN-KAN-SEN | HIT-213 | N/A | N/A | Unshielded, 1.5m | N/A |
| 10. | USB 2.0 HDD | Terasys | F12-U | N/A | BSMI ID: 4912A002 | Shielded, 1.8m | N/A |
| 11. | PS/2 Mouse | DELL | M071KC | 443029438 | FCC DoC BSMI: R41108 | Shielded, 1.8m | N/A |
| 12. | PS/2 Keyboard | DELL | SK-8110 | N/A | FCC DoC BSMI: T3A002 | Shielded, 1.8m | N/A |

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




7. FCC PART 15.247 REQUIREMENTS

7.1 6DB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100 kHz, VBW = 620 kHz, Span = 50 MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.



TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

| Channel | Frequency (MHz) | Bandwidth (kHz) | Limit (kHz) | Result |
|---------|-----------------|-----------------|-------------|--------|
| Low | 2412 | 10000 | >500 | PASS |
| Mid | 2437 | 10750 | | PASS |
| High | 2462 | 11080 | | PASS |

Test mode: IEEE 802.11g

| Channel | Frequency (MHz) | Bandwidth (kHz) | Limit (kHz) | Result |
|---------|-----------------|-----------------|-------------|--------|
| Low | 2412 | 16500 | >500 | PASS |
| Mid | 2437 | 16500 | | PASS |
| High | 2462 | 15920 | | PASS |



Test Plot

IEEE 802.11b

6dB Bandwidth (CH Low)

Agilent 16:07:06 Jul 2, 2007

R T


6dB BW, b Mode Low Ch.

Δ Mkr1 10.00 MHz

Ref 20 dBm

Atten 20 dB

-0.46 dB

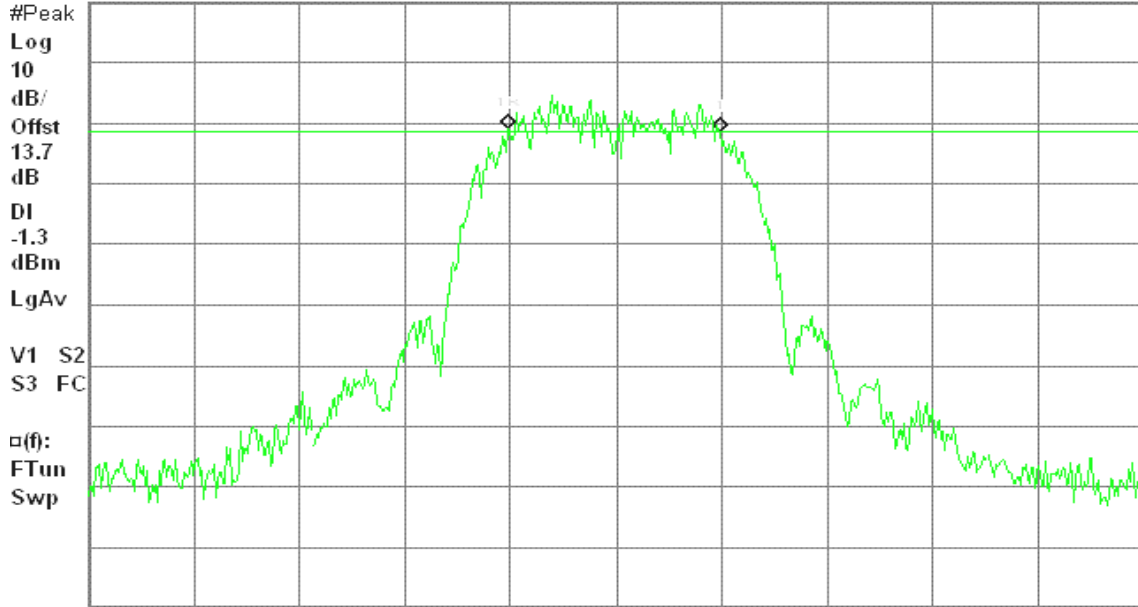

Center 2.412 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 620 kHz

Sweep 4.68 ms (601 pts)

6dB Bandwidth (CH Mid)

Agilent 15:58:05 Jul 2, 2007

R T


6dB BW, b Mode Mid Ch.

Δ Mkr1 10.75 MHz

Ref 20 dBm

Atten 20 dB

0.44 dB

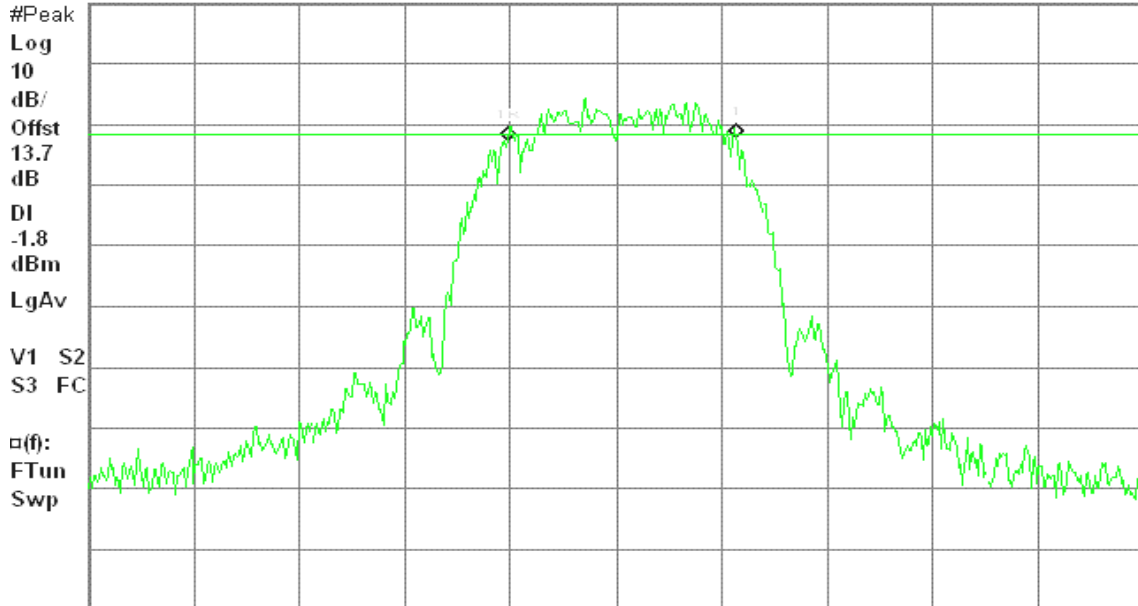

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 620 kHz

Sweep 4.68 ms (601 pts)



6dB Bandwidth (CH High)

Agilent 16:18:52 Jul 2, 2007

R T


6dB BW, b Mode High Ch.

Δ Mkr1 11.08 MHz

Ref 20 dBm

Atten 20 dB

2.69 dB

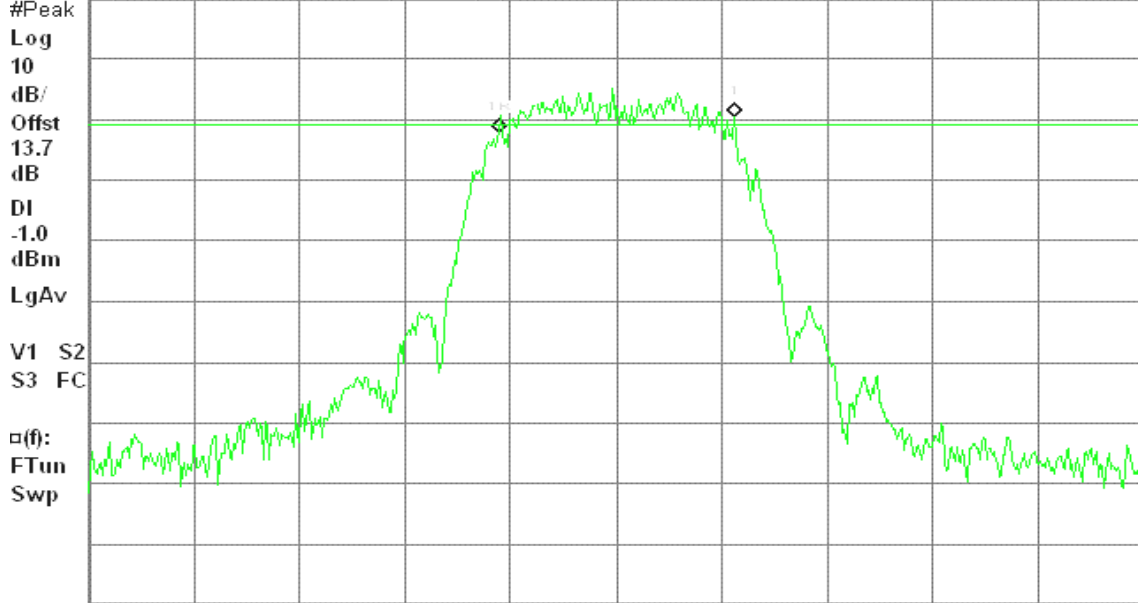

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 620 kHz

Sweep 4.68 ms (601 pts)

IEEE 802.11g

6dB Bandwidth (CH Low)

Agilent 14:48:14 Jul 2, 2007

R T


6dB BW, g Mode Low Ch.

Δ Mkr1 16.50 MHz

Ref 20 dBm

Atten 20 dB

-0.44 dB

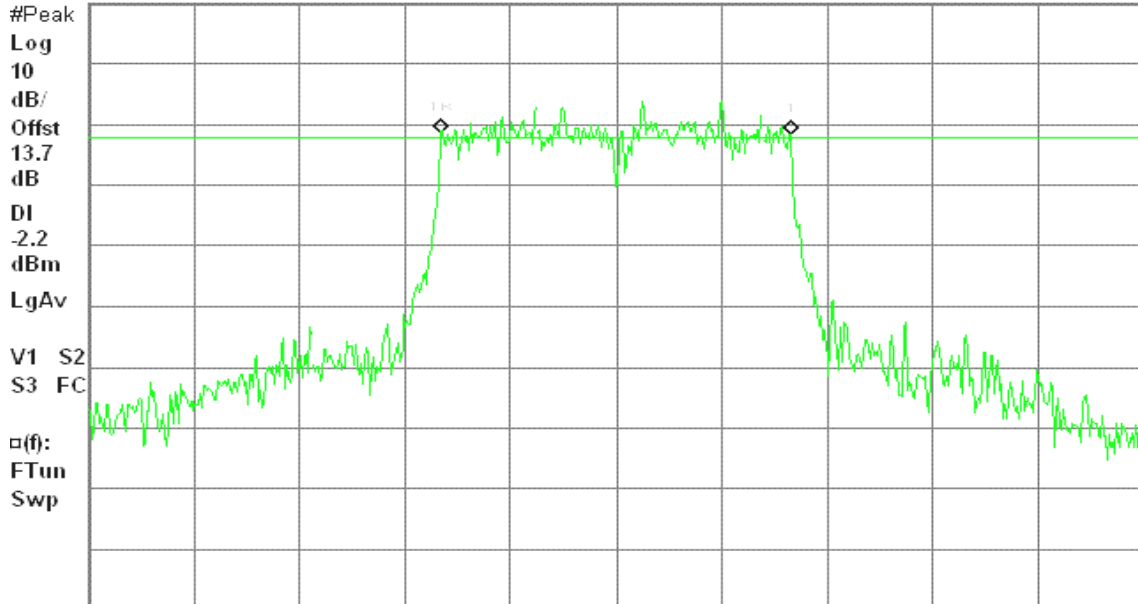

Center 2.412 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 620 kHz

Sweep 4.68 ms (601 pts)



6dB Bandwidth (CH Mid)

Agilent 15:07:17 Jul 2, 2007

R T

6dB BW, g Mode Mid Ch.

Δ Mkr1 16.50 MHz

Ref 20 dBm

Atten 20 dB

-0.79 dB

#Peak

Log

10

dB/

Offst

13.7

dB

DI

-3.1

dBm

LgAv


V1 S2

S3 FC

□(f):

FTun

Swp

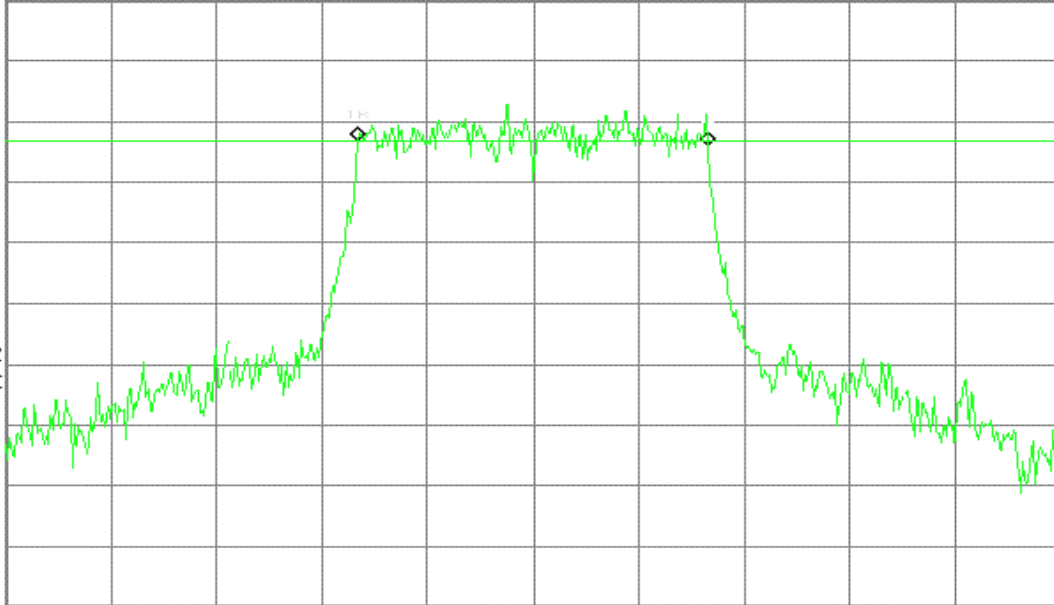

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 620 kHz

Sweep 4.68 ms (601 pts)

6dB Bandwidth (CH High)

Agilent 14:37:16 Jul 2, 2007

R T

6dB BW, g Mode High Ch.

Δ Mkr1 15.92 MHz

Ref 20 dBm

Atten 20 dB

0.59 dB

#Peak

Log

10

dB/

Offst

13.7

dB

DI

-2.0

dBm

LgAv


V1 S2

S3 FC

□(f):

FTun

Swp

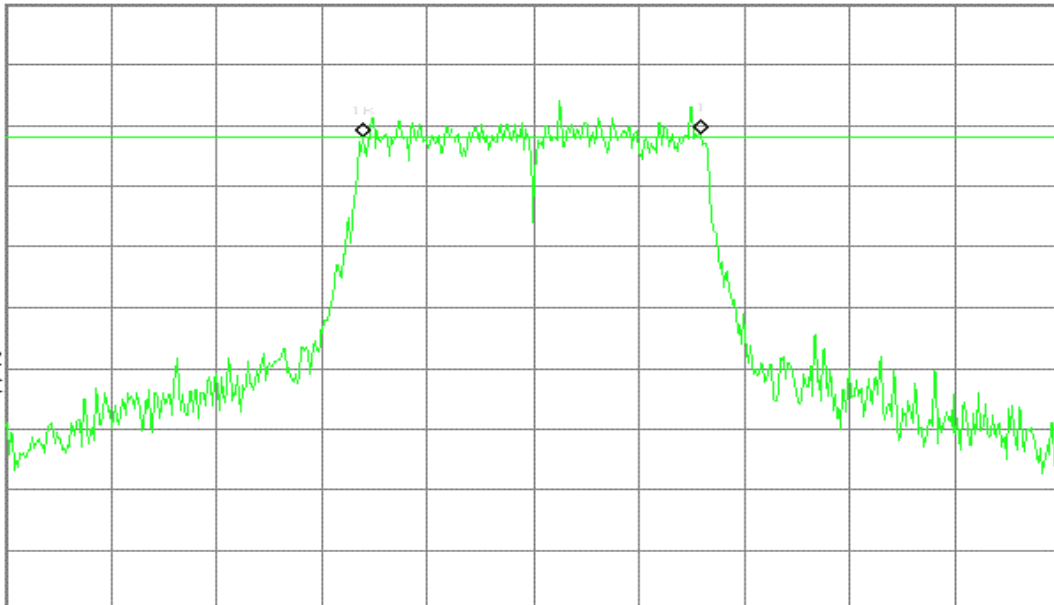

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 620 kHz

Sweep 4.68 ms (601 pts)




7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.

TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) | Limit (W) | Result |
|---------|-----------------|--------------------|------------------|-----------|--------|
| Low | 2412 | 18.27 | 0.06714 | 1.00 | PASS |
| Mid | 2437 | 18.24 | 0.06668 | | PASS |
| High | 2462 | 19.17 | 0.08260 | | PASS |

Test mode: IEEE 802.11g

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) | Limit (W) | Result |
|---------|-----------------|--------------------|------------------|-----------|--------|
| Low | 2412 | 16.65 | 0.04624 | 1.00 | PASS |
| Mid | 2437 | 16.24 | 0.04207 | | PASS |
| High | 2462 | 17.65 | 0.05821 | | PASS |



Test Plot

IEEE 802.11b

Peak Power (CH Low)


Agilent 16:08:15 Jul 2, 2007

R T

Peak Output Power, b Mode Low Ch.

Ref 20 dBm

Atten 20 dB

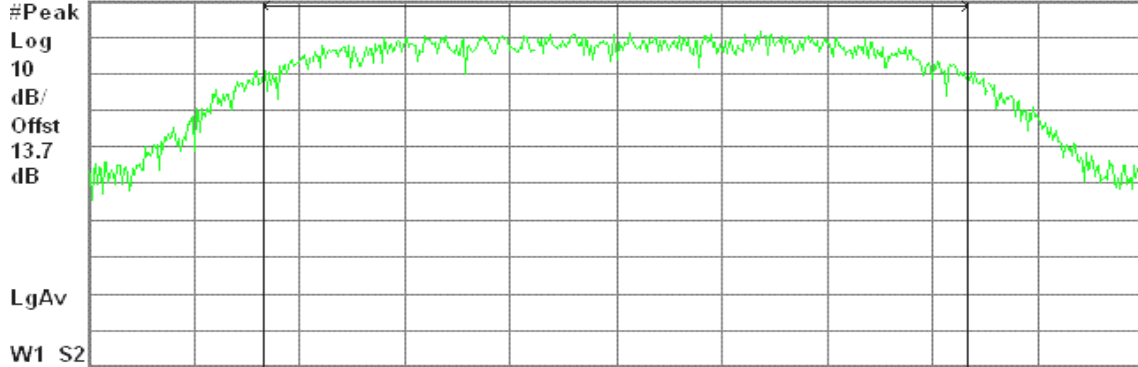

Center 2.412 00 GHz

Span 18.92 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

18.27 dBm / 12.6120 MHz

-52.74 dBm/Hz

Peak Power (CH Mid)


Agilent 15:59:22 Jul 2, 2007

R T

Peak Output Power, b Mode Mid Ch.

Ref 20 dBm

Atten 20 dB

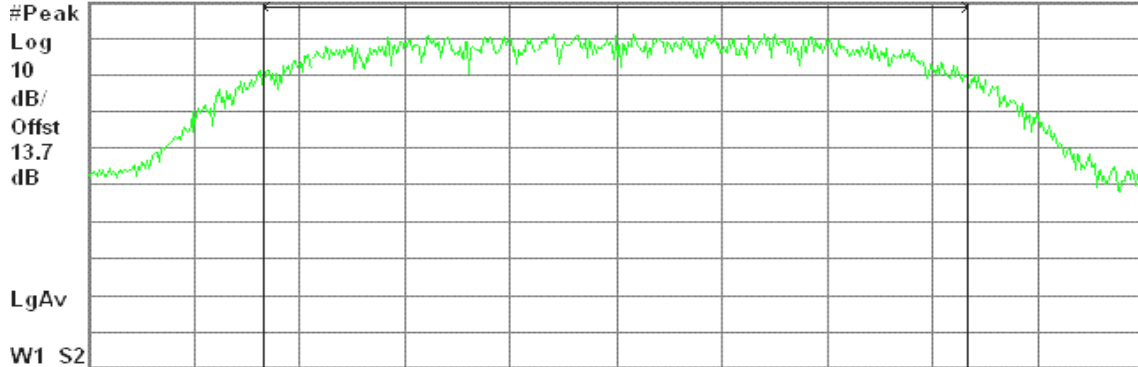

Center 2.437 00 GHz

Span 18.93 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

18.24 dBm / 12.6210 MHz

-52.77 dBm/Hz



Peak Power (CH High)


Agilent 16:19:48 Jul 2, 2007

R T

Peak Output Power, b Mode High Ch.

Ref 20 dBm

Atten 20 dB

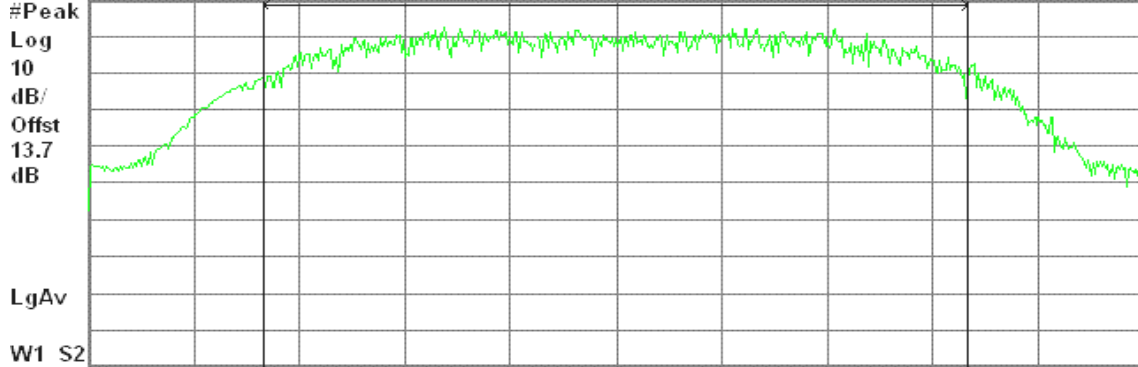

Center 2.462 00 GHz

Span 18.93 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

19.17 dBm / 12.6230 MHz

-51.84 dBm/Hz

IEEE 802.11g

Peak Power (CH Low)


Agilent 14:50:31 Jul 2, 2007

R T

Peak Output Power, g Mode Low Ch.

Ref 20 dBm

Atten 20 dB

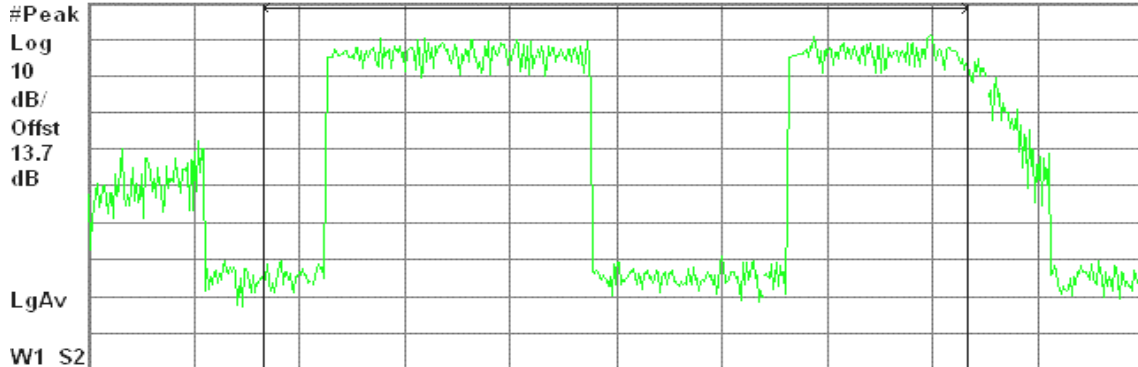

Center 2.412 00 GHz

Span 24.59 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

16.65 dBm / 16.3950 MHz

-55.49 dBm/Hz



Peak Power (CH Mid)


Agilent 15:08:29 Jul 2, 2007

R T

Peak Output Power , g Mode Mid Ch.

Ref 20 dBm

Atten 20 dB

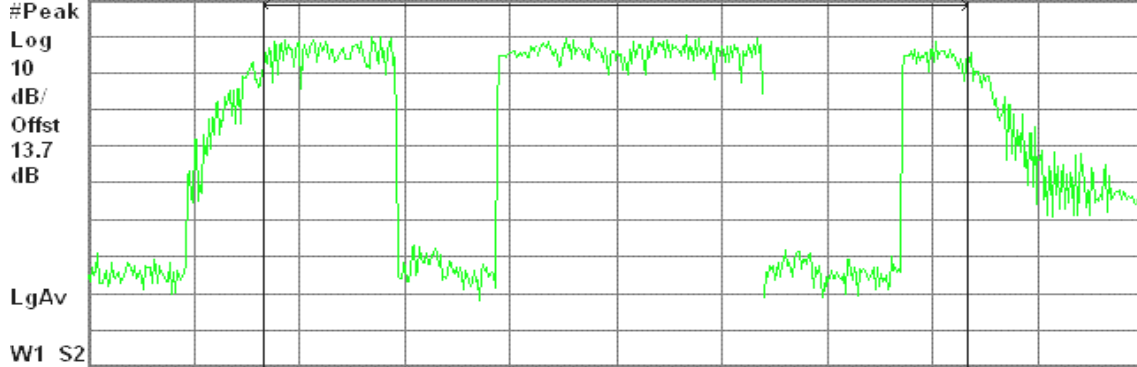

Center 2.437 00 GHz

Span 24.63 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

16.24 dBm / 16.4180 MHz

-55.91 dBm/Hz

Peak Power (CH High)


Agilent 14:39:55 Jul 2, 2007

R T

Peak Output Power , g Mode High Ch.

Ref 20 dBm

Atten 20 dB

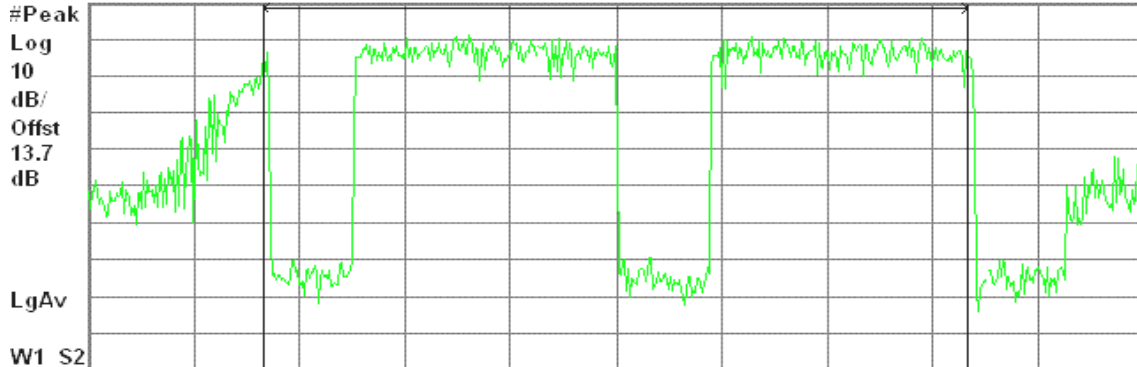

Center 2.462 00 GHz

Span 24.64 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

17.65 dBm / 16.4270 MHz

-54.51 dBm/Hz




7.3 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the average power detection.

TEST RESULTS

No non-compliance noted.

Test Data

Test mode: IEEE 802.11b mode

| Channel | Frequency (MHz) | Output Power (dBm) |
|---------|-----------------|--------------------|
| Low | 2412 | 14.89 |
| Mid | 2437 | 15.19 |
| High | 2462 | 12.18 |

Test mode: IEEE 802.11g mode


| Channel | Frequency (MHz) | Output Power (dBm) |
|---------|-----------------|--------------------|
| Low | 2412 | 13.68 |
| Mid | 2437 | 11.08 |
| High | 2462 | 12.90 |




Test Plot

IEEE 802.11b

CH Low

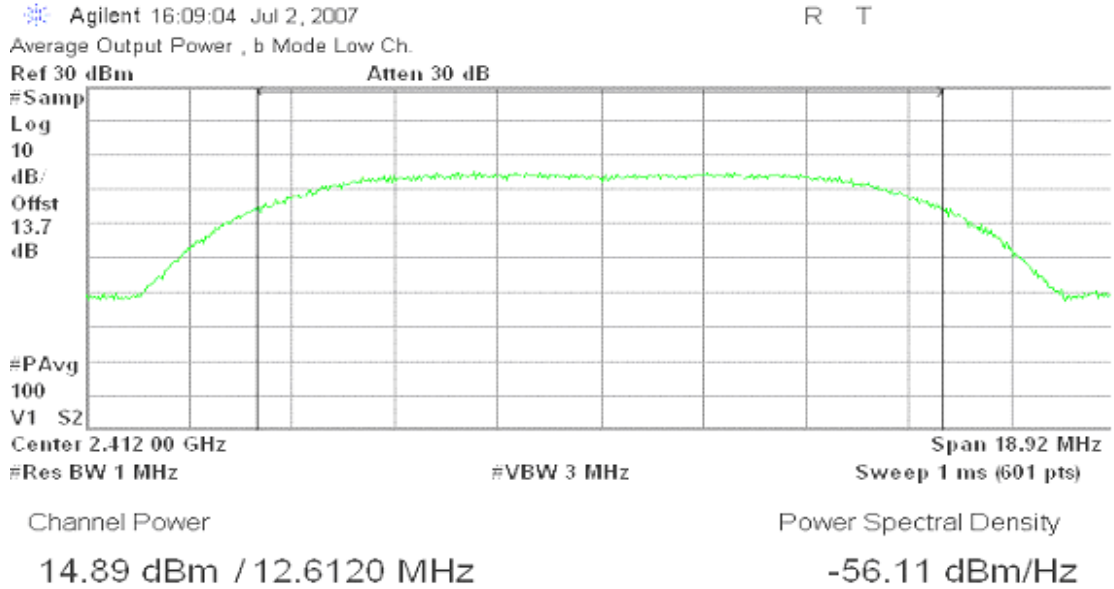


CH Mid

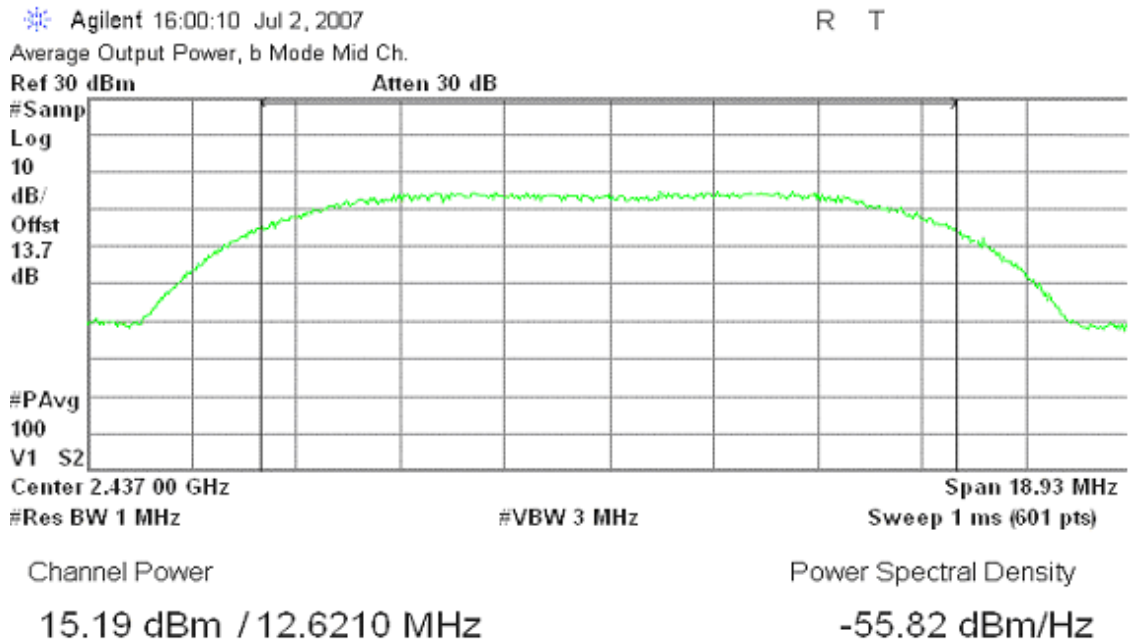




CH High

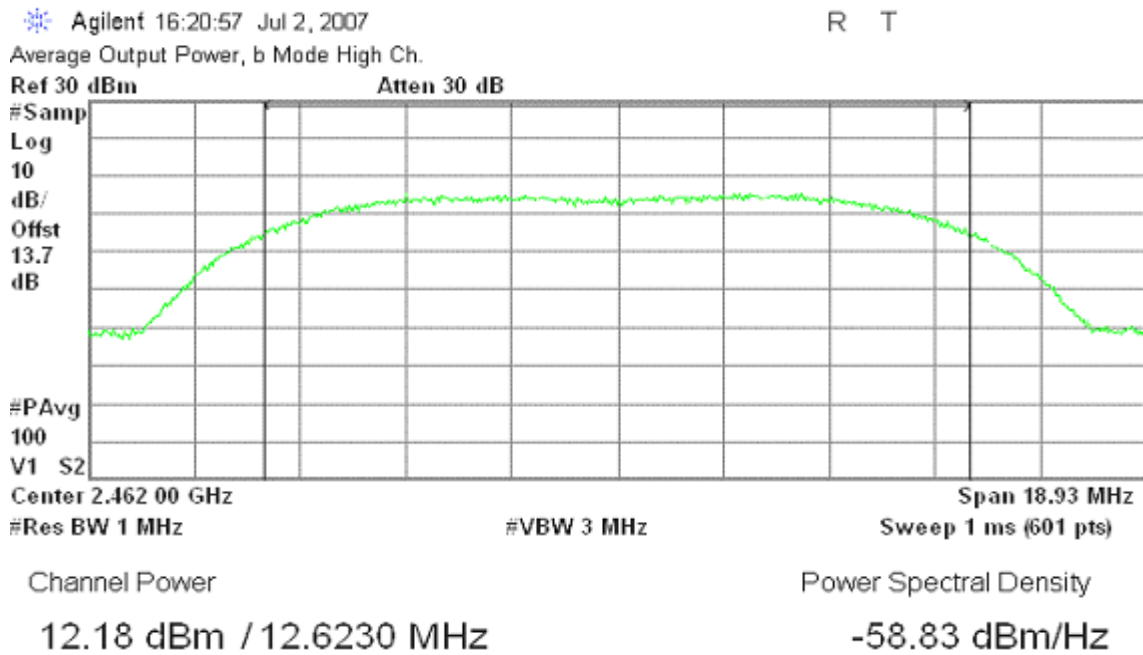

IEEE 802.11g

CH Low

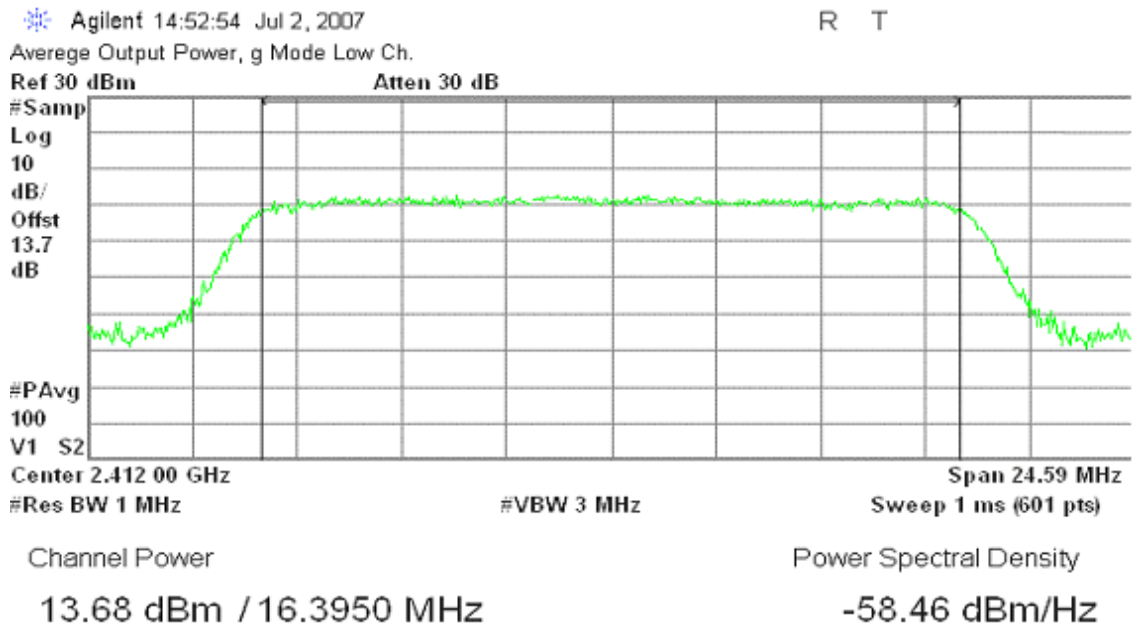



CH Mid


Agilent 15:09:30 Jul 2, 2007

R T

Average Output Power, g Mode Mid Ch.

Ref 30 dBm

Atten 30 dB

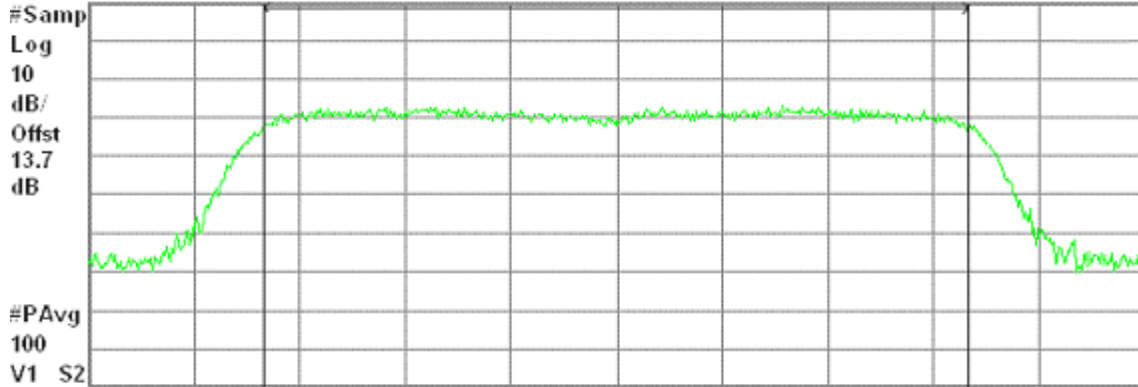

Center 2.437 00 GHz

Span 24.63 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

11.08 dBm / 16.4180 MHz

-61.08 dBm/Hz

CH High


Agilent 14:41:17 Jul 2, 2007

R T

Average Output Power, g Mode High Ch.

Ref 30 dBm

Atten 30 dB

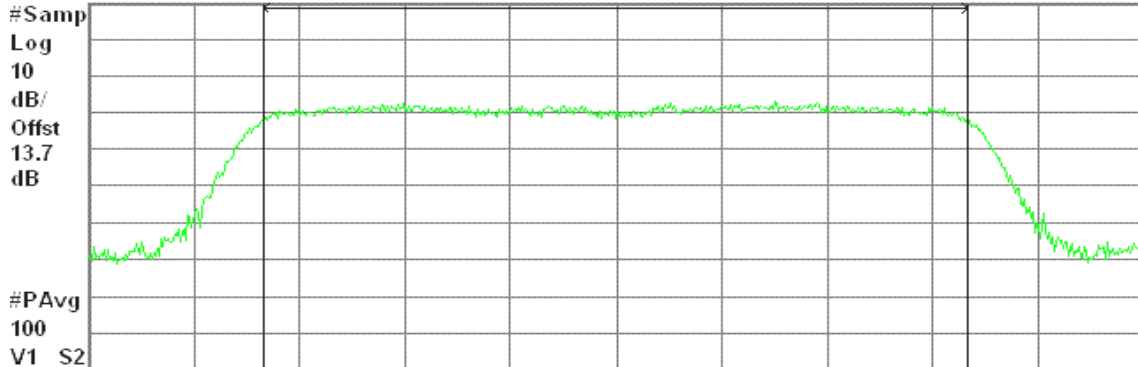

Center 2.462 00 GHz

Span 24.64 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

12.90 dBm / 16.4270 MHz


-59.25 dBm/Hz

7.4 BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

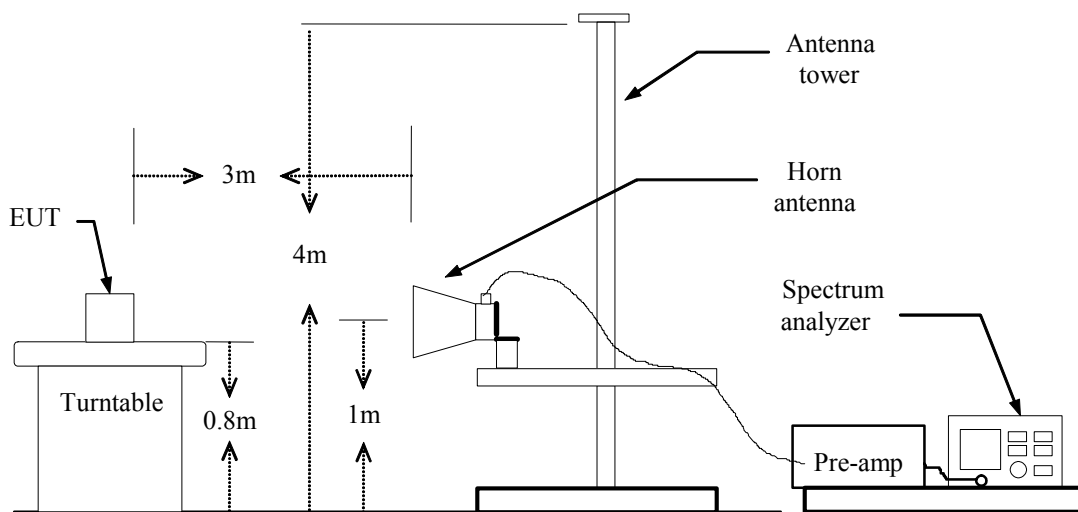

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.



Band Edges (IEEE 802.11b / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 17:58:14 Jun 25, 2007

R L

Mkr1 2.390 0 GHz
56.28 dBμV

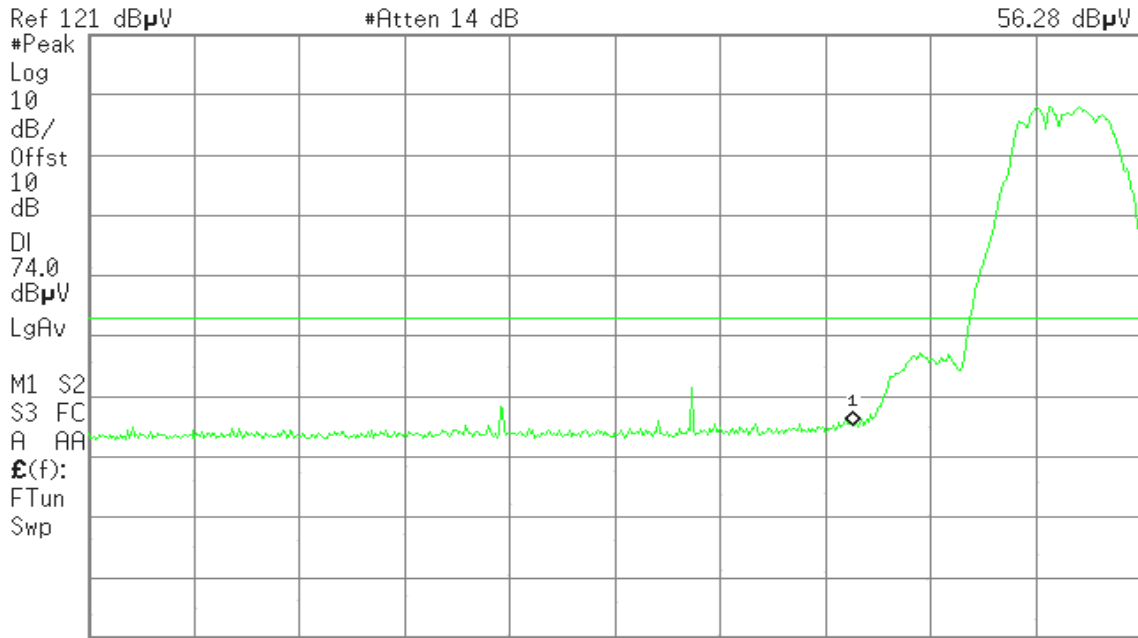

Start 2.310 0 GHz

Stop 2.420 0 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 17:59:21 Jun 25, 2007

R T

Mkr1 2.390 0 GHz
42.77 dBμV

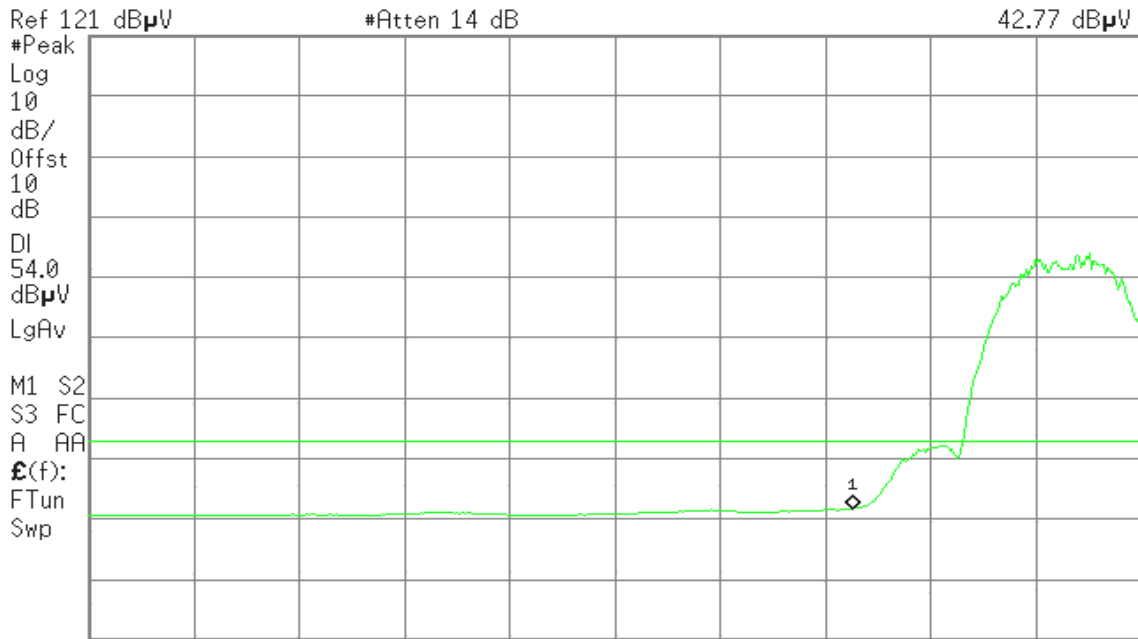

Start 2.310 0 GHz

Stop 2.420 0 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 8.577 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 18:04:57 Jun 25, 2007

R T

Mkr1 2.390 0 GHz
56.86 dBμV

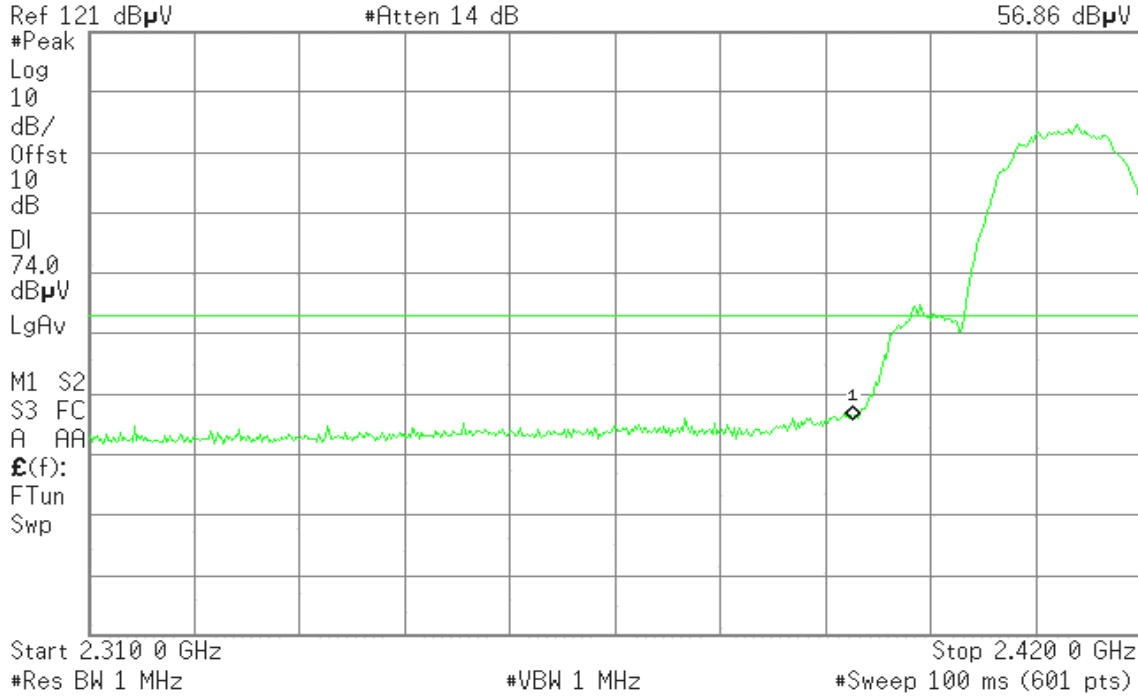


Detector mode: Average

Polarity: Horizontal

Agilent 18:05:38 Jun 25, 2007

R T

Mkr1 2.390 0 GHz
42.47 dBμV

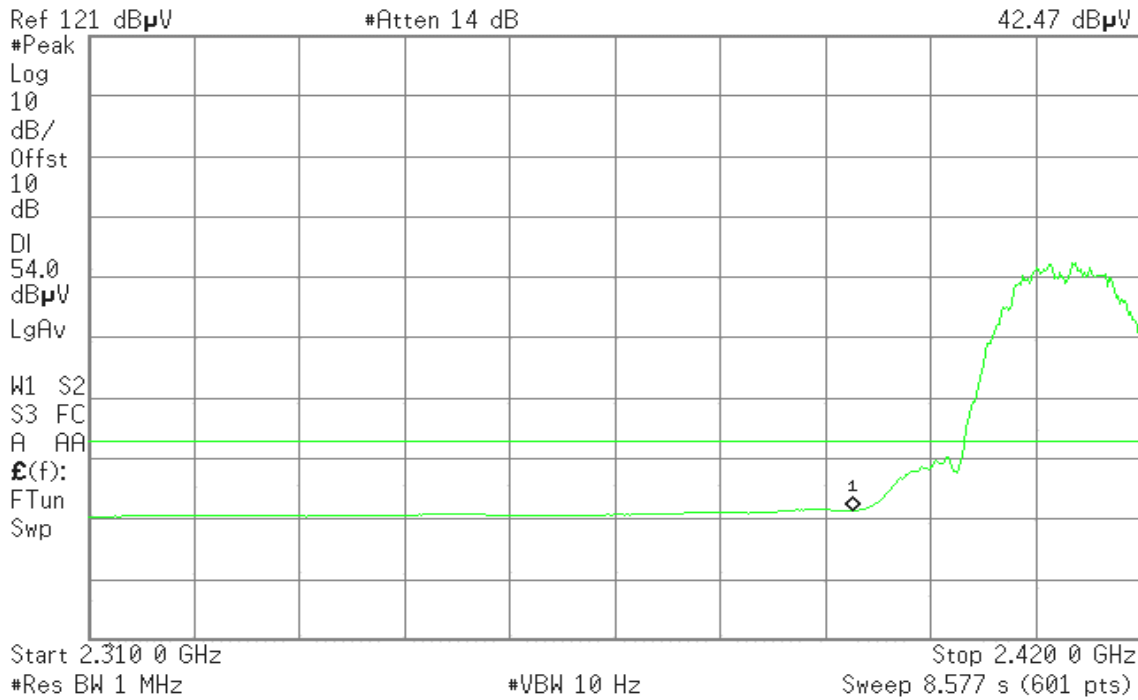



Band Edges (IEEE 802.11b / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 18:49:49 Jun 25, 2007

R T

Mkr1 2.483 50 GHz
55.64 dBμV

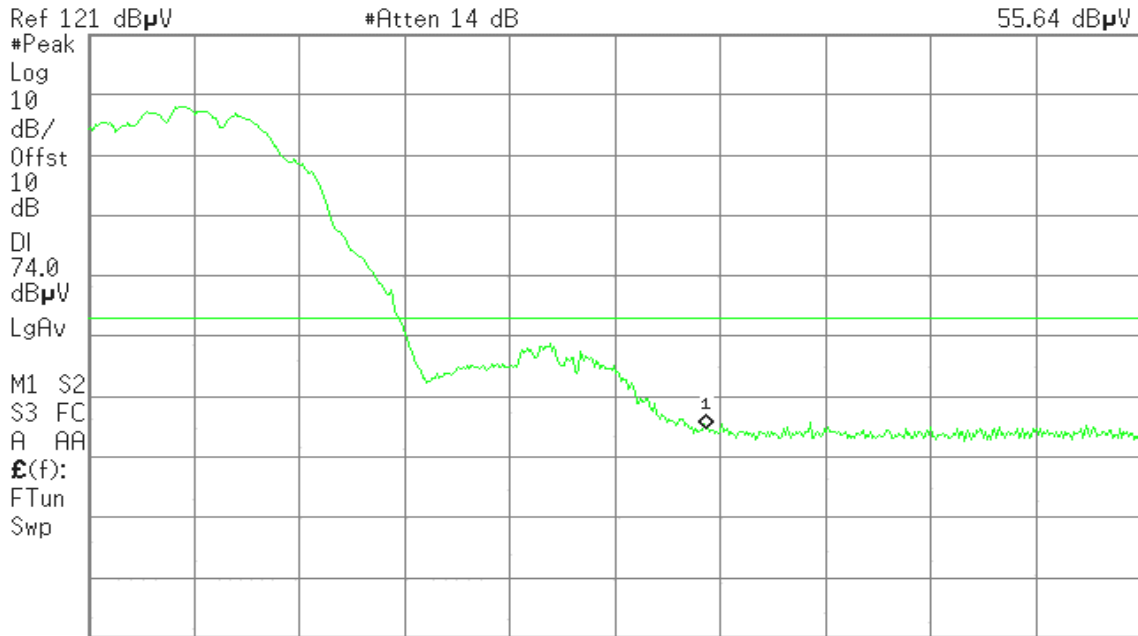

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 18:50:53 Jun 25, 2007

R T

Mkr1 2.483 50 GHz
43.45 dBμV

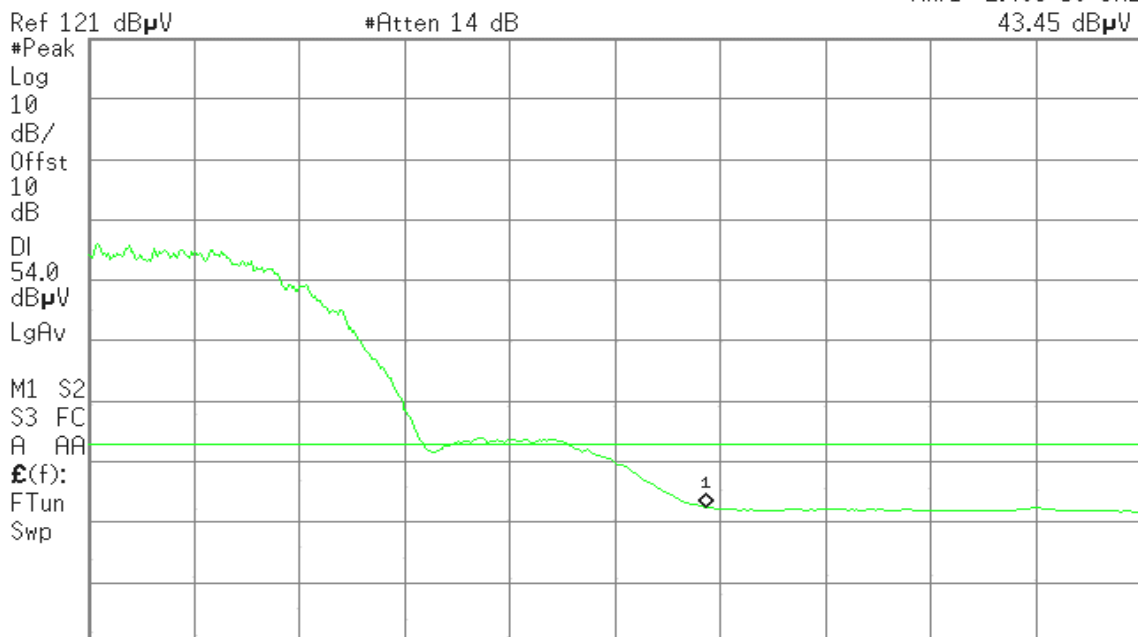

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 18:12:00 Jun 25, 2007

R T

Mkr1 2.483 50 GHz
58.76 dBμV

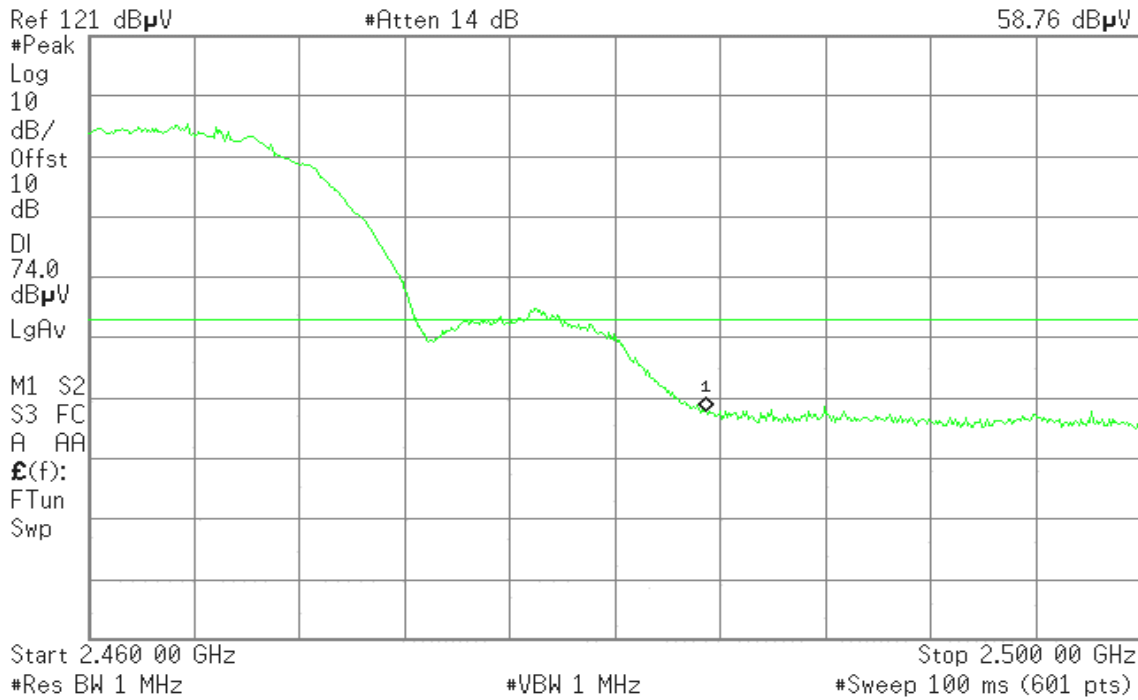


Detector mode: Average

Polarity: Horizontal

Agilent 18:12:55 Jun 25, 2007

R T

Mkr1 2.483 50 GHz
45.52 dBμV

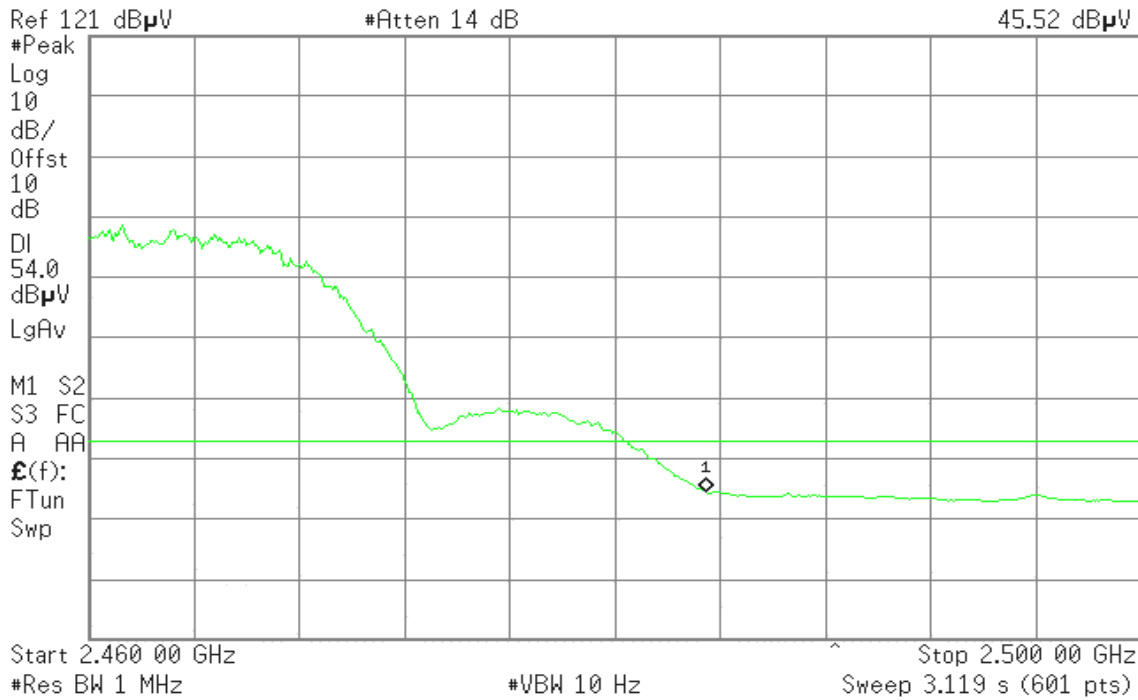



Band Edges (IEEE 802.11g / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 19:17:22 Jun 25, 2007

R T

Mkr1 2.390 0 GHz
60.83 dBμV

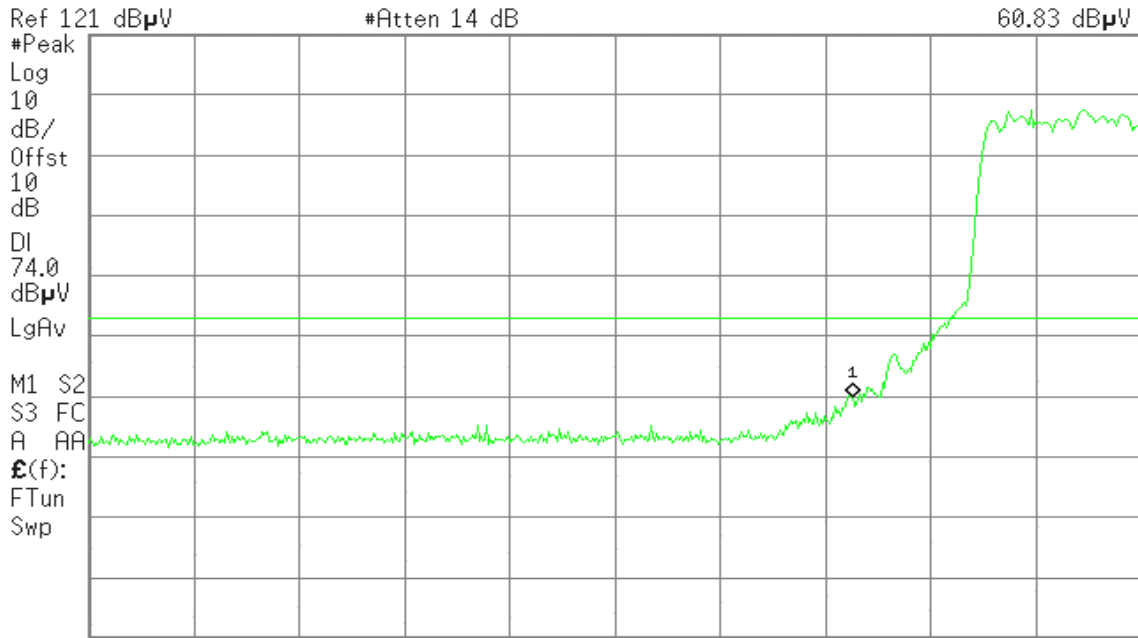


Detector mode: Average

Polarity: Vertical

Agilent 19:18:48 Jun 25, 2007

R T

Mkr1 2.390 0 GHz
45.81 dBμV

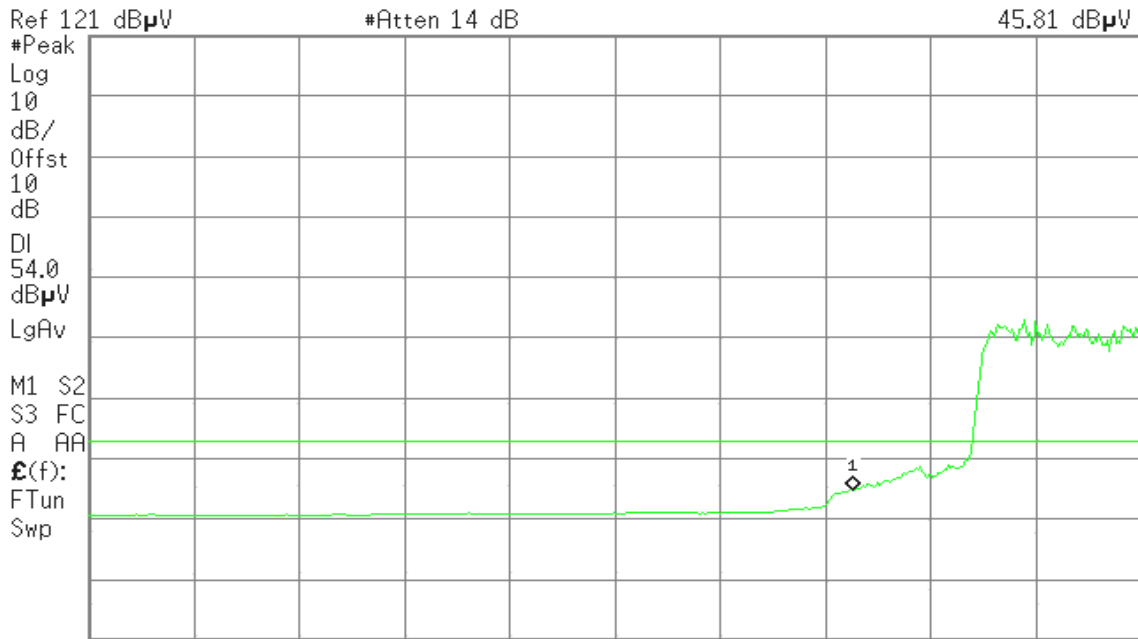




Detector mode: Peak

Polarity: Horizontal

Agilent 19:11:32 Jun 25, 2007

R T

Mkr1 2.390 0 GHz
54.77 dBμV

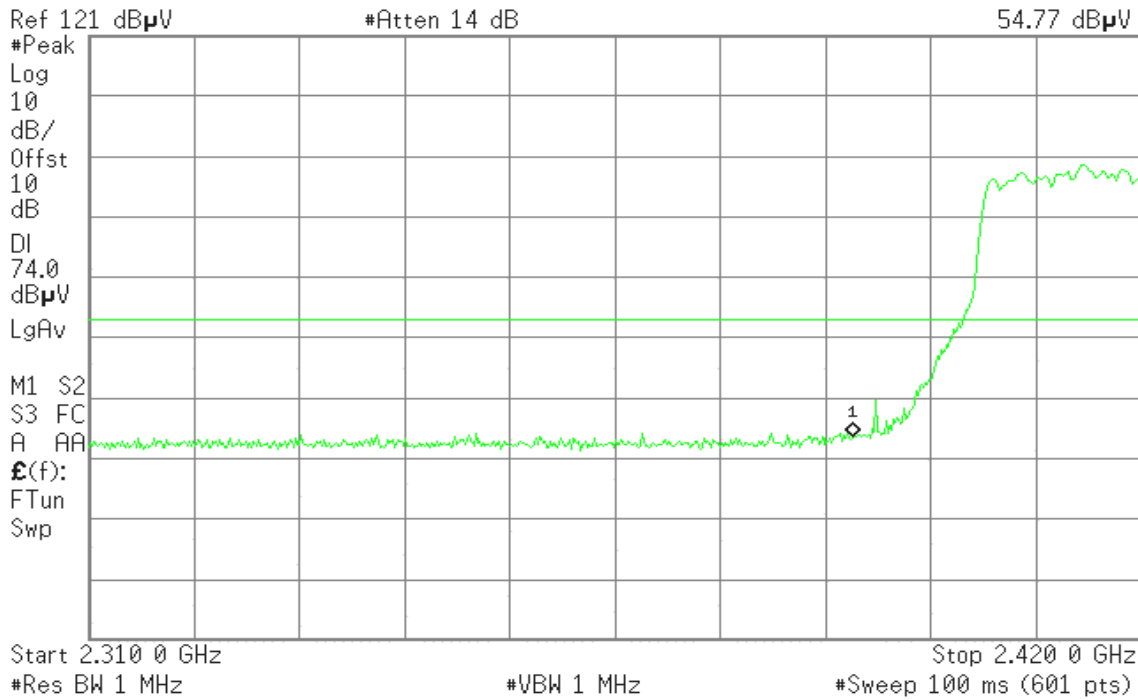


Detector mode: Average

Polarity: Horizontal

Agilent 19:12:15 Jun 25, 2007

R T

Mkr1 2.390 0 GHz
43.46 dBμV

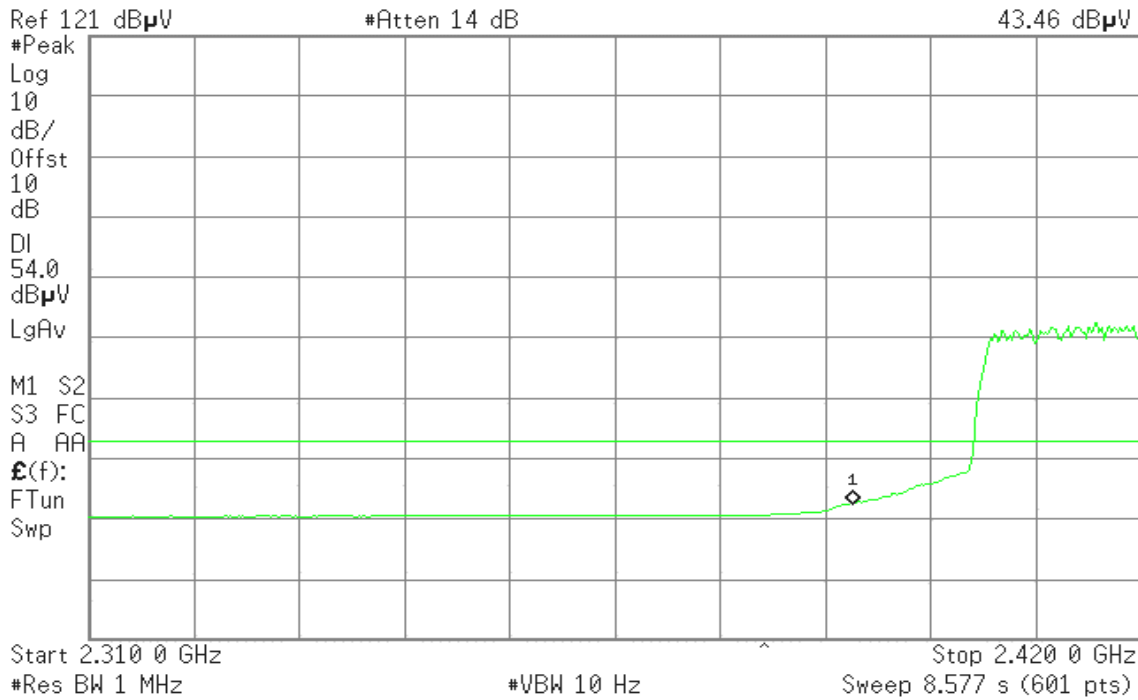



Band Edges (IEEE 802.11g / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 18:57:34 Jun 25, 2007

R T

Mkr1 2.483 50 GHz
59.03 dBμV

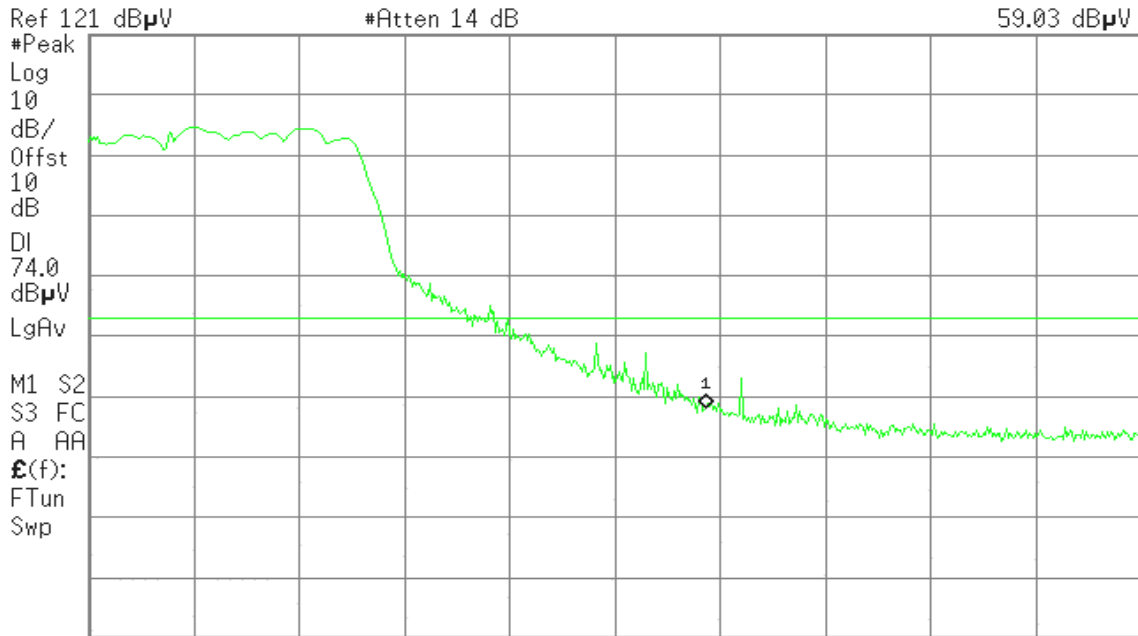


Detector mode: Average

Polarity: Vertical

Agilent 18:58:21 Jun 25, 2007

R T

Mkr1 2.483 50 GHz
43.914 dBμV

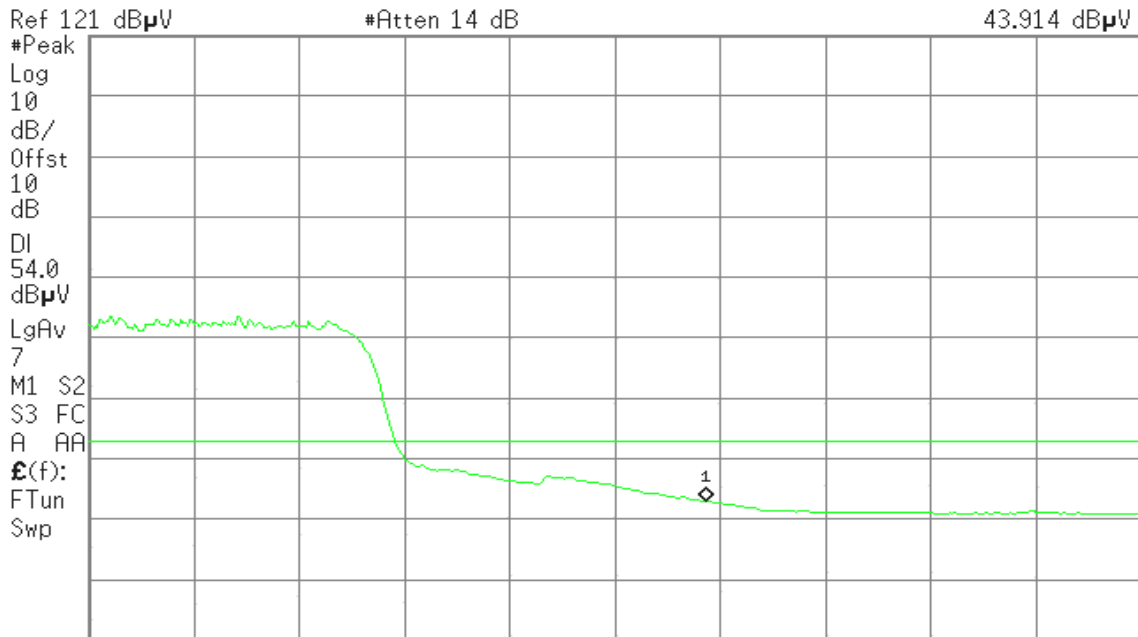




Detector mode: Peak

Polarity: Horizontal

Agilent 19:02:16 Jun 25, 2007

R T

Mkr1 2.483 50 GHz
61.45 dBμV

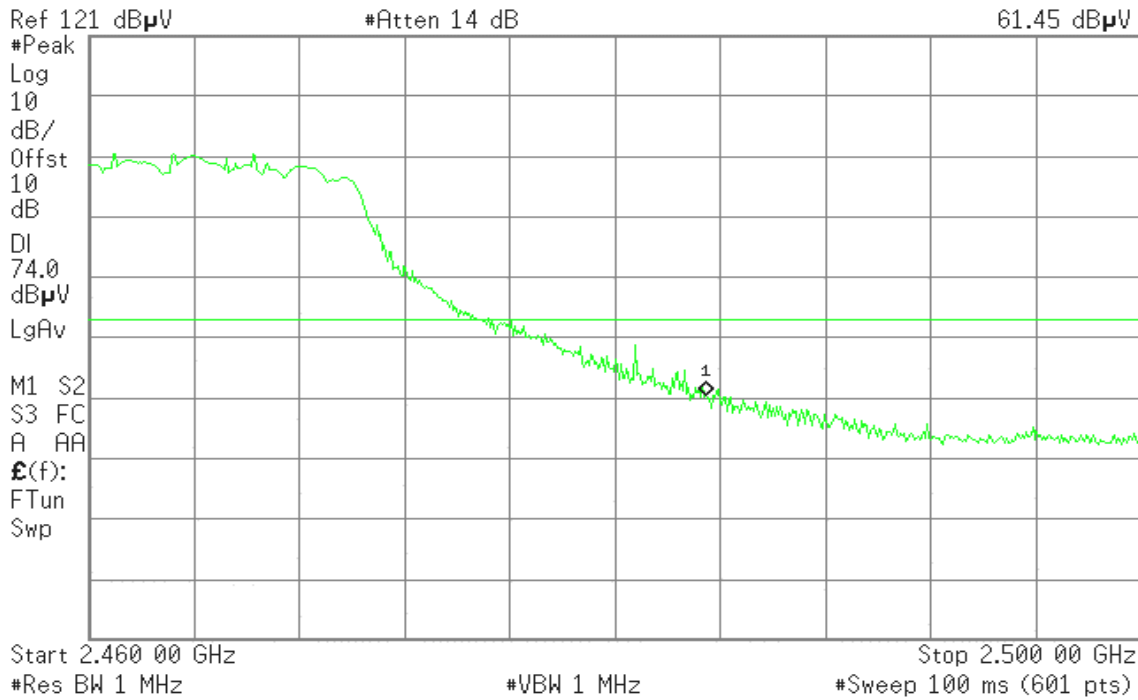


Detector mode: Average

Polarity: Horizontal

Agilent 19:02:49 Jun 25, 2007

R T

Mkr1 2.483 50 GHz
43.87 dBμV

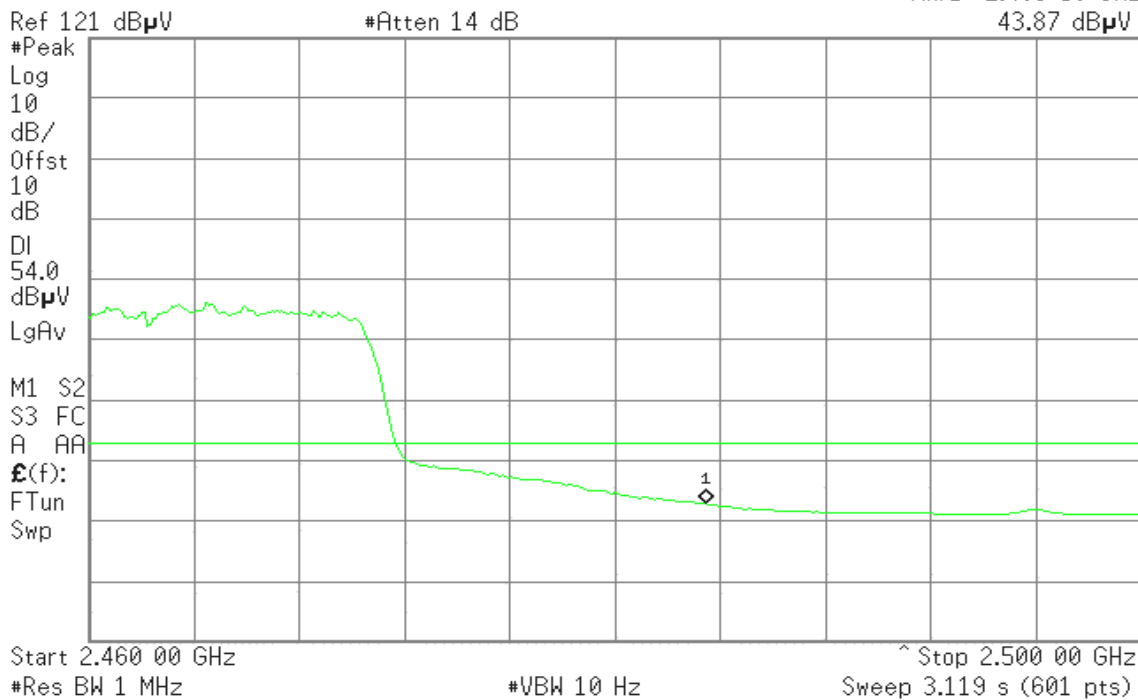


7.5 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 300 kHz, Sweep = 100 s
3. Record the max reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.



TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Result |
|---------|-----------------|------------|-------------|--------|
| Low | 2412 | -8.97 | 8.00 | PASS |
| Mid | 2437 | -8.21 | | PASS |
| High | 2462 | -8.35 | | PASS |

Test mode: IEEE 802.11g


| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Result |
|---------|-----------------|------------|-------------|--------|
| Low | 2412 | -9.75 | 8.00 | PASS |
| Mid | 2437 | -10.63 | | PASS |
| High | 2462 | -9.44 | | PASS |




Test Plot

IEEE 802.11b

PPSD (CH Low)

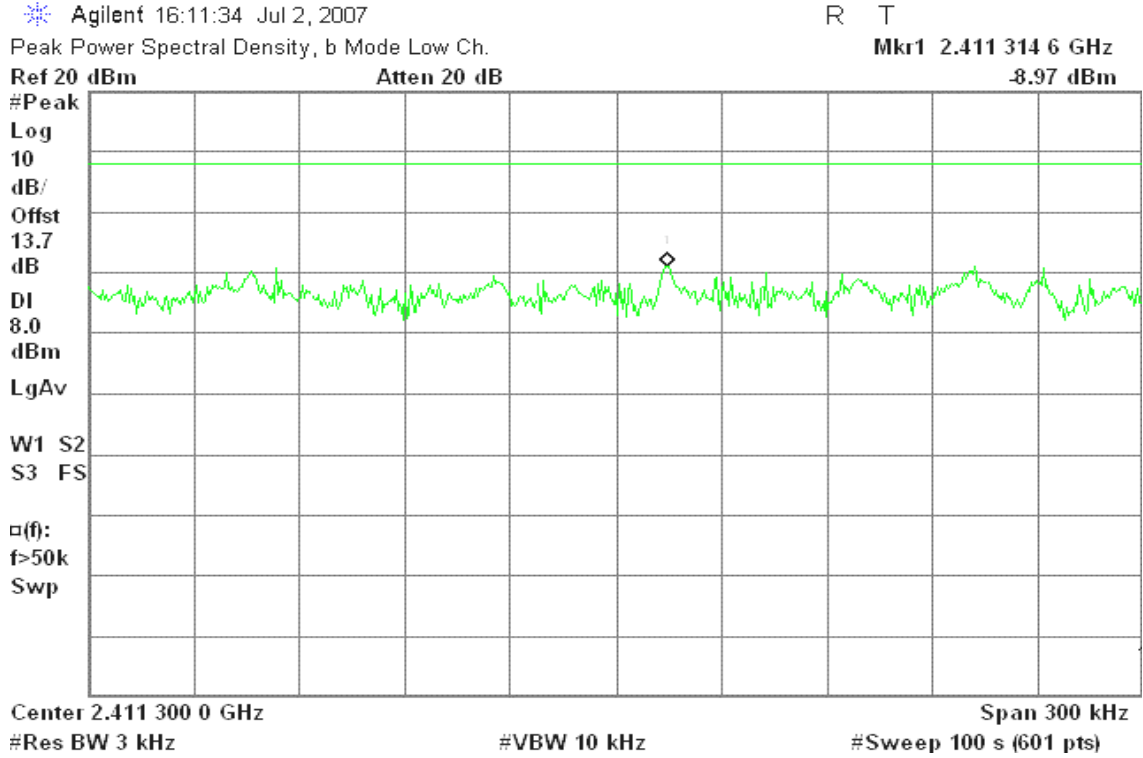

PPSD (CH Mid)

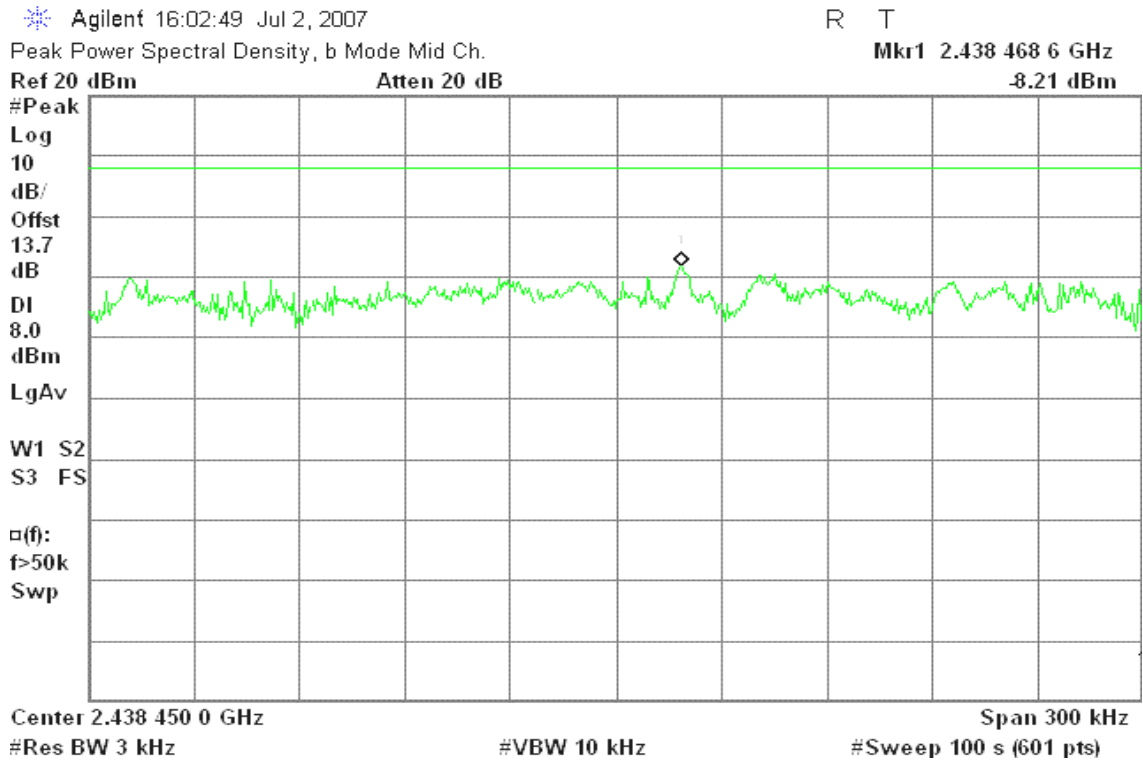



PPSD (CH High)

Agilent 16:23:13 Jul 2, 2007

R T


Peak Power Spectral Density, b Mode High Ch.

Mkr1 2.463 468 6 GHz

Ref 20 dBm

Atten 20 dB

-8.35 dBm

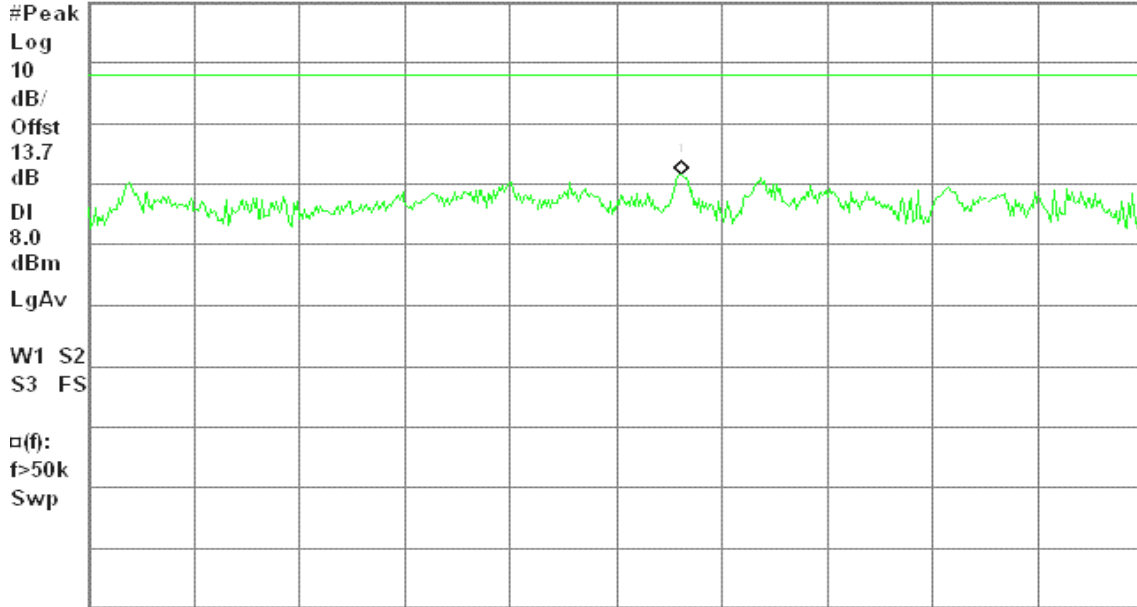

Center 2.463 450 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

IEEE 802.11g

PPSD (CH Low)

Agilent 14:56:10 Jul 2, 2007

R L


Peak Power Spectral Density, g Mode Low Ch.

Mkr1 2.413 078 1 GHz

Ref 20 dBm

Atten 20 dB

-9.75 dBm

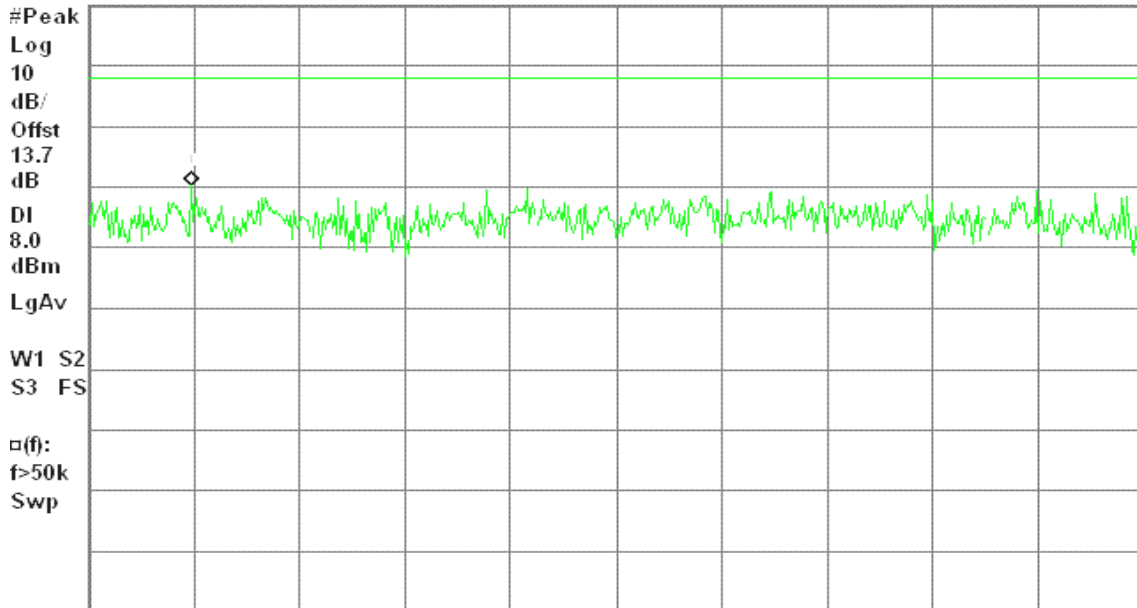

Center 2.413 200 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)



PPSD (CH Mid)

Agilent 15:12:14 Jul 2, 2007

R T


Peak Power Spectral Density, g Mode Mid Ch.

Mkr1 2.438 080 9 GHz

Ref 20 dBm

Atten 20 dB

-10.63 dBm

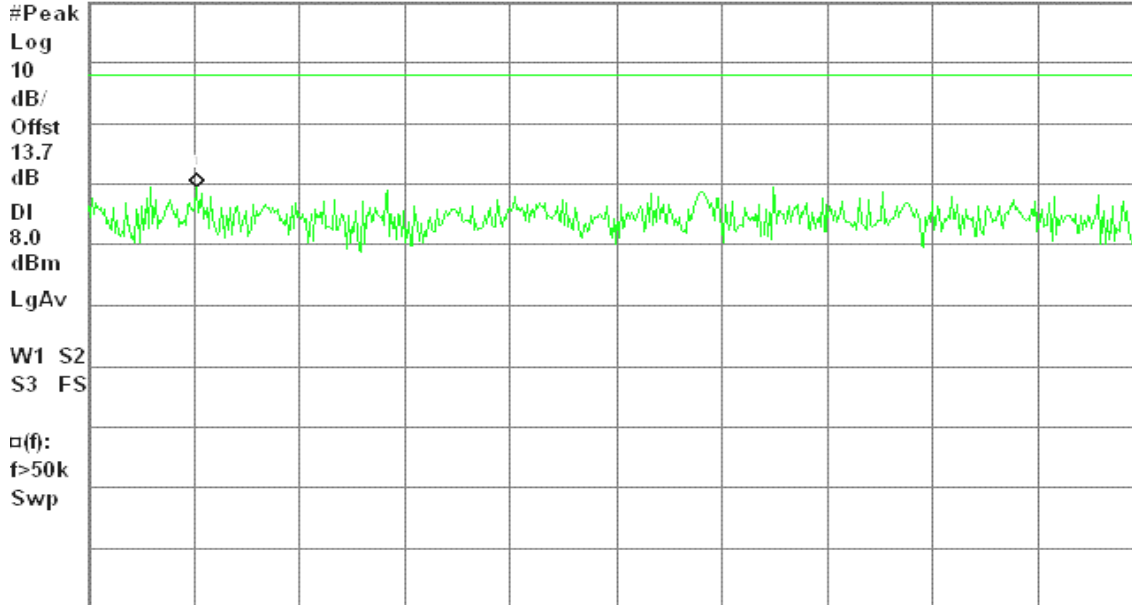

Center 2.438 200 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

PPSD (CH High)

Agilent 14:43:53 Jul 2, 2007

R T


Peak Power Spectral Density, g Mode High Ch.

Mkr1 2.459 319 6 GHz

Ref 20 dBm

Atten 20 dB

-9.44 dBm

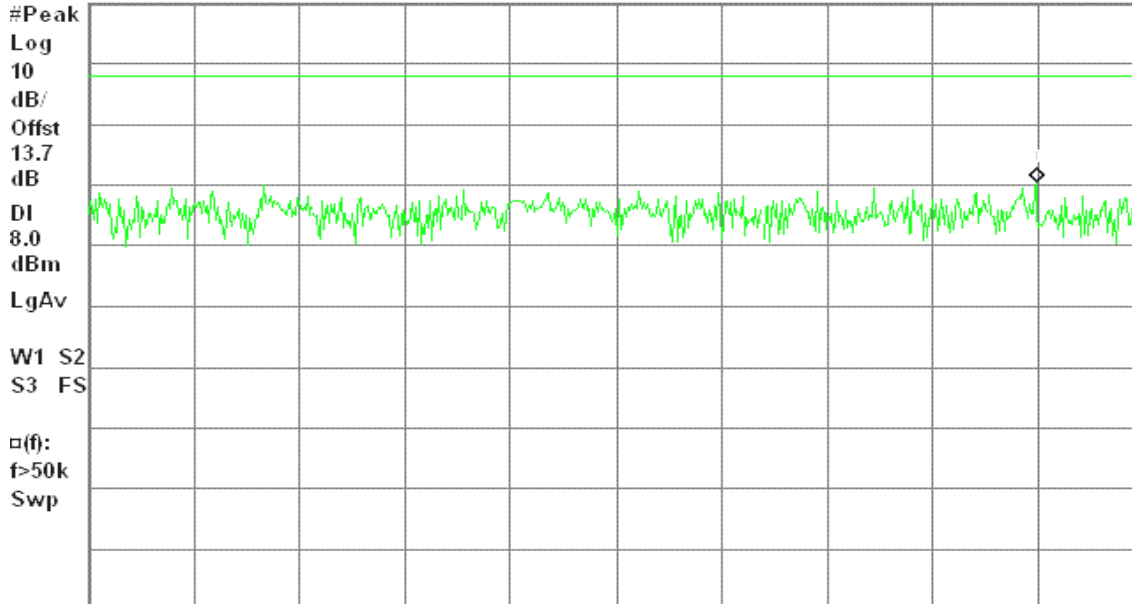

Center 2.459 200 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)




7.6 SPURIOUS EMISSIONS

7.6.1 Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

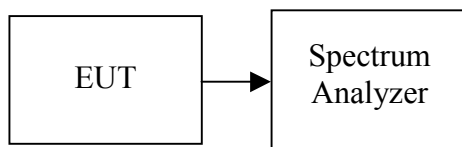

TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 13GHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted



Test Plot

IEEE 802.11b

CH Low

Agilent 16:13:42 Jul 2, 2007

R T


Spurious, b Mode Low Ch.

Mkr3 4.83 GHz

Ref 20 dBm

Atten 20 dB

-48.76 dBm

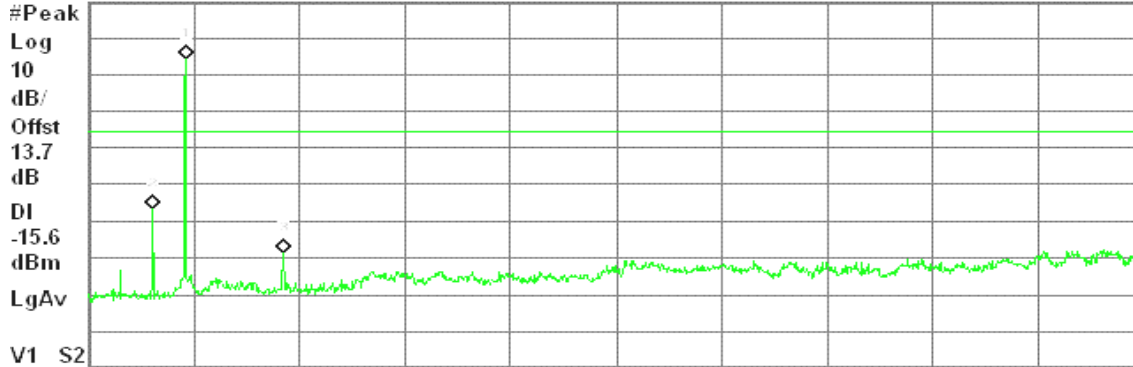

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|----------|------------|
| 1 | (1) | Freq | 2.42 GHz | 4.38 dBm |
| 2 | (1) | Freq | 1.61 GHz | -36.57 dBm |
| 3 | (1) | Freq | 4.83 GHz | -48.76 dBm |

CH Mid

Agilent 16:04:28 Jul 2, 2007

R T


Spurious, b Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 20 dB

1.47 dBm

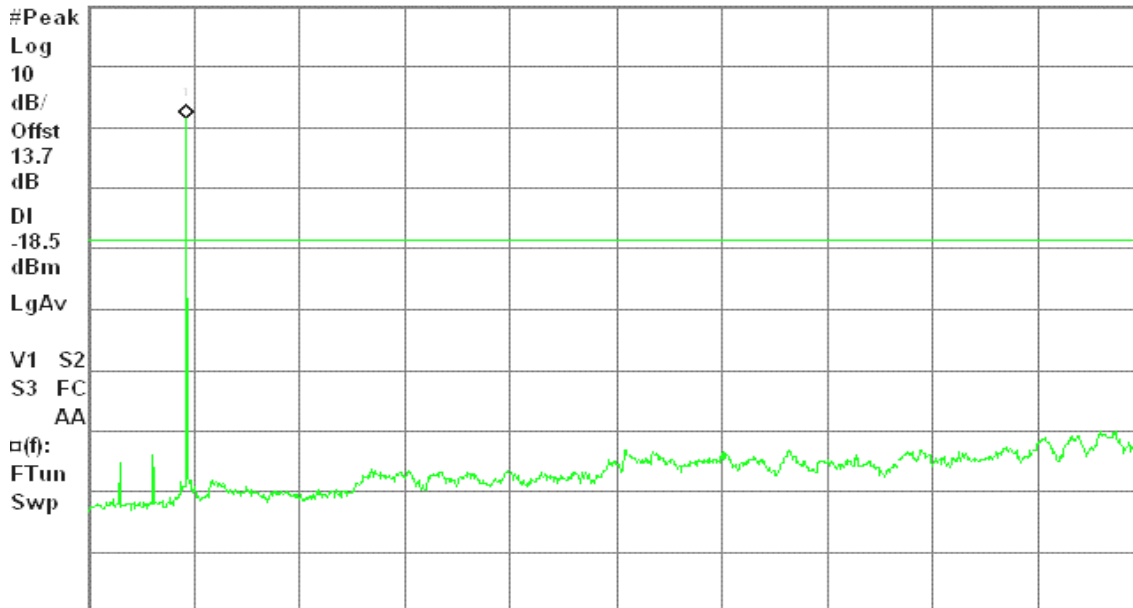

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



CH High

Agilent 16:25:08 Jul 2, 2007


R T

Spurious, b Mode High Ch.

Mkr2 1.64 GHz
-31.80 dBm

Ref 20 dBm

Atten 20 dB

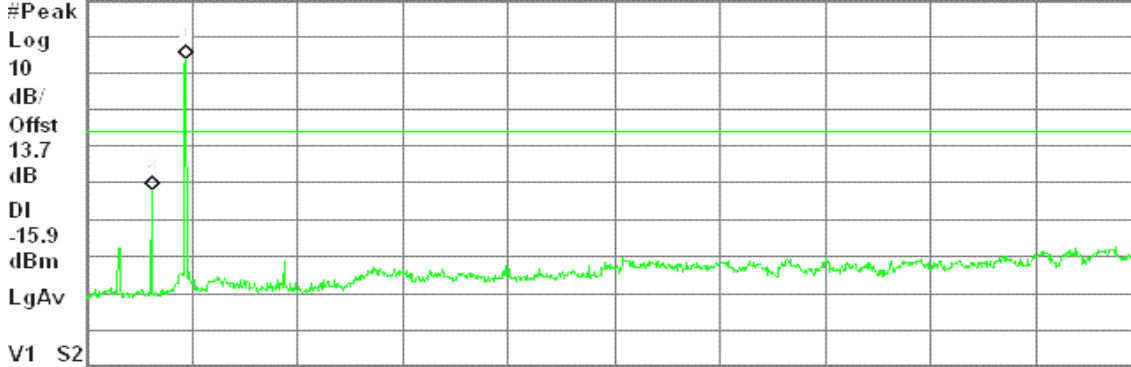

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|----------|------------|
| 1 | (1) | Freq | 2.47 GHz | 4.10 dBm |
| 2 | (1) | Freq | 1.64 GHz | -31.80 dBm |

IEEE 802.11g

CH Low

Agilent 14:59:43 Jul 2, 2007


R T

Spurious, g Mode Low Ch.

Mkr3 7.25 GHz
-46.65 dBm

Ref 20 dBm

Atten 20 dB

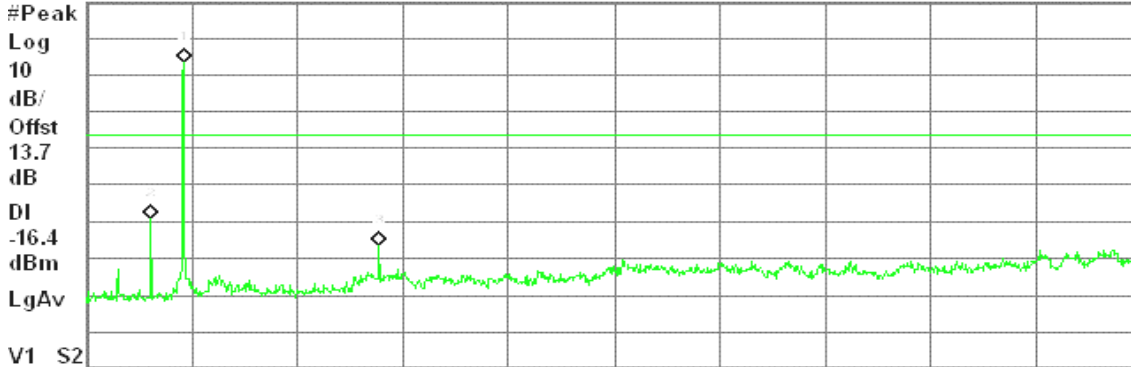

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|----------|------------|
| 1 | (1) | Freq | 2.42 GHz | 3.58 dBm |
| 2 | (1) | Freq | 1.61 GHz | -39.32 dBm |
| 3 | (1) | Freq | 7.25 GHz | -46.65 dBm |



CH Mid

Agilent 15:16:20 Jul 2, 2007

R T


Spurious, g Mode Mid Ch.

Mkr2 1.61 GHz

Ref 20 dBm

Atten 20 dB

-37.41 dBm

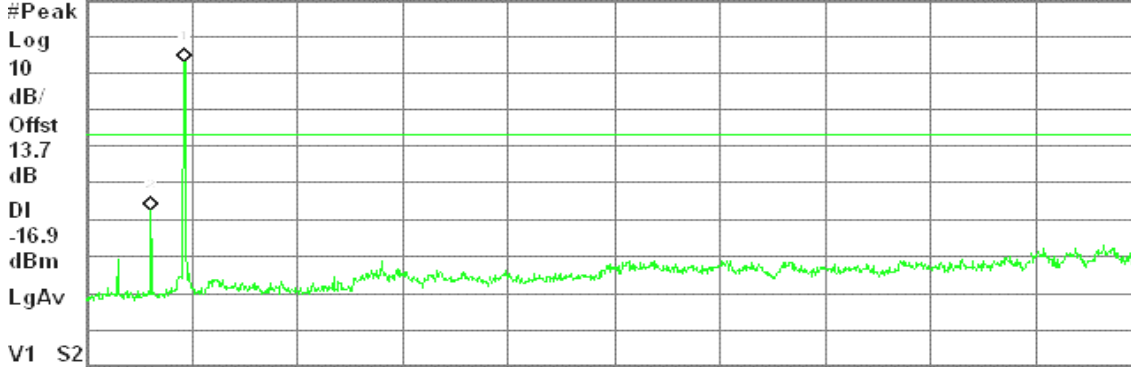

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|----------|------------|
| 1 | (1) | Freq | 2.46 GHz | 3.12 dBm |
| 2 | (1) | Freq | 1.61 GHz | -37.41 dBm |

CH High

Agilent 14:45:51 Jul 2, 2007

R T


Spurious, g Mode High Ch.

Mkr2 1.64 GHz

Ref 20 dBm

Atten 20 dB

-33.19 dBm

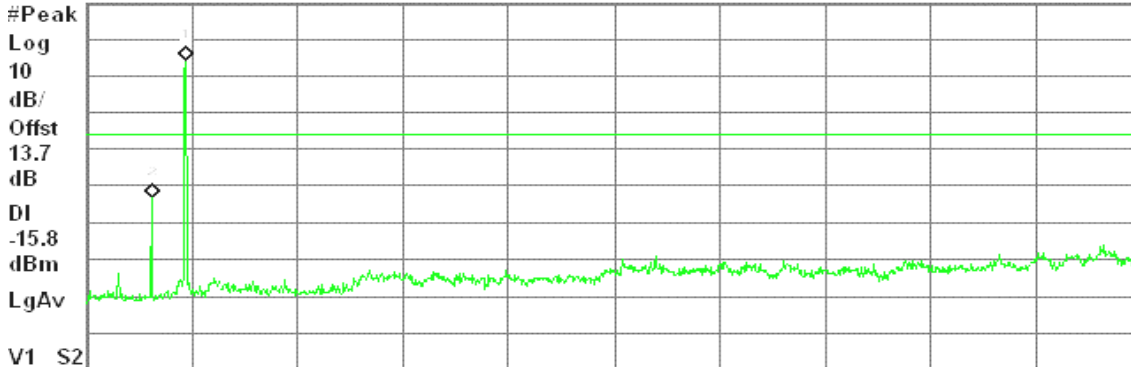

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 2.411 s (1001 pts)

| Marker | Trace | Type | X Axis | Amplitude |
|--------|-------|------|----------|------------|
| 1 | (1) | Freq | 2.47 GHz | 4.21 dBm |
| 2 | (1) | Freq | 1.64 GHz | -33.19 dBm |



7.6.2 RADIATED EMISSIONS

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength ($\mu\text{V/m}$) | Measurement Distance (m) |
|-----------------|------------------------------------|--------------------------|
| 30-88 | 100* | 3 |
| 88-216 | 150* | 3 |
| 216-960 | 200* | 3 |
| Above 960 | 500 | 3 |


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


| Frequency (MHz) | Field Strength ($\mu\text{V/m}$ at 3-meter) | Field Strength (dB $\mu\text{V/m}$ at 3-meter) |
|-----------------|--|--|
| 30-88 | 100 | 40 |
| 88-216 | 150 | 43.5 |
| 216-960 | 200 | 46 |
| Above 960 | 500 | 54 |

Test Configuration

Below 1 GHz

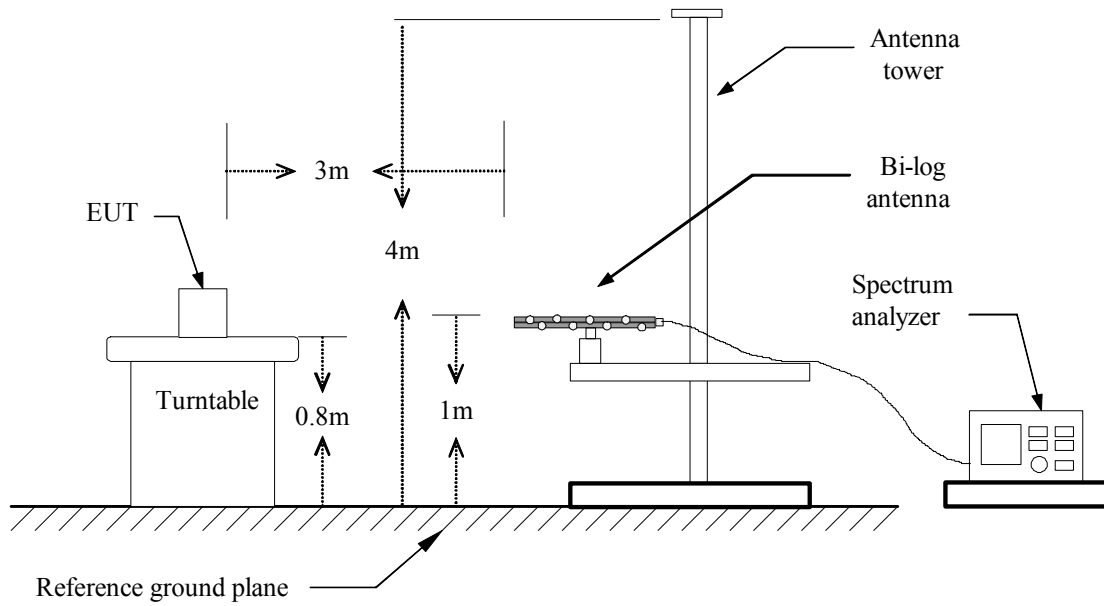

Above 1 GHz

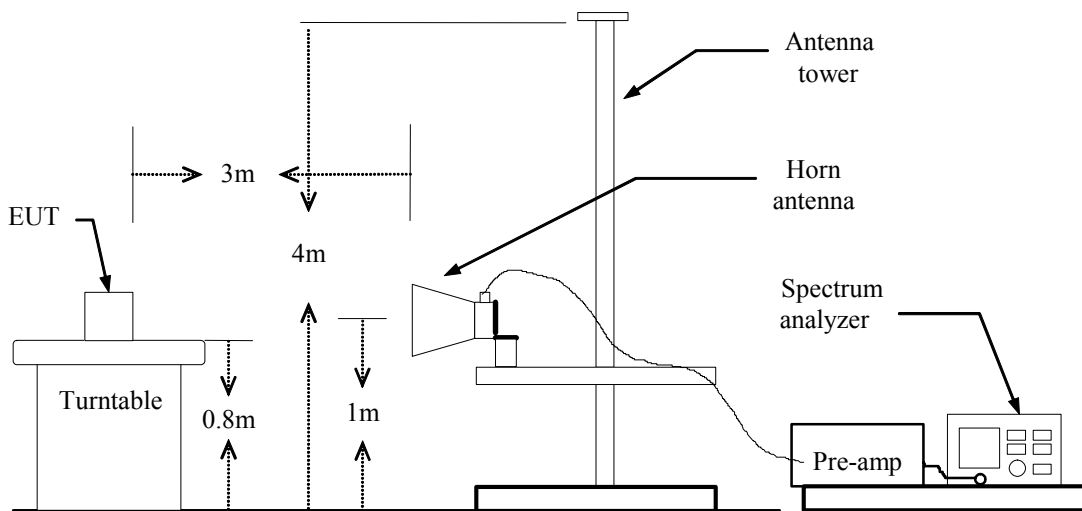



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.



TEST RESULTS

No non-compliance noted

Below 1GHz

Operation Mode: Normal Link

Test Date: July 27, 2007

Temperature: 26°C

Tested by: Wolf Huang

Humidity: 58% RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|----------------|--------------------------|-----------------|----------------|-------------|--------|
| 30.00 | V | 41.74 | -4.65 | 37.09 | 40.00 | -2.91 | QP |
| 207.83 | V | 55.97 | -14.90 | 41.07 | 43.50 | -2.43 | Peak |
| 400.22 | V | 43.66 | -10.00 | 33.65 | 46.00 | -12.35 | Peak |
| 482.67 | V | 40.42 | -7.73 | 32.69 | 46.00 | -13.31 | Peak |
| 666.97 | V | 36.01 | -4.89 | 31.12 | 46.00 | -14.88 | Peak |
| 801.15 | V | 38.05 | -3.13 | 34.92 | 46.00 | -11.08 | Peak |
| 211.07 | H | 58.40 | -15.31 | 43.09 | 43.50 | -0.41 | QP |
| 400.22 | H | 50.32 | -10.00 | 40.31 | 46.00 | -5.69 | Peak |
| 482.67 | H | 47.09 | -7.73 | 39.36 | 46.00 | -6.64 | Peak |
| 548.95 | H | 45.17 | -6.92 | 38.25 | 46.00 | -7.75 | Peak |
| 802.77 | H | 43.16 | -3.09 | 40.06 | 46.00 | -5.94 | Peak |
| 925.63 | H | 41.50 | -1.44 | 40.06 | 46.00 | -5.94 | Peak |

Remark:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).



Above 1 GHz

Operation Mode: TX / IEEE 802.11b / CH Low

Test Date: June 25, 2007

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 50 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1606.67 | V | 58.07 | --- | -8.91 | 49.16 | --- | 74.00 | 54.00 | -4.84 | Peak |
| 4826.67 | V | 61.03 | 39.41 | 0.56 | 61.59 | 39.96 | 74.00 | 54.00 | -14.04 | AVG |
| 5585.00 | V | 60.63 | 47.00 | 1.52 | 62.15 | 48.52 | 74.00 | 54.00 | -5.48 | AVG |
| 6331.67 | V | 50.07 | --- | 2.69 | 52.75 | --- | 74.00 | 54.00 | -1.25 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| 1606.67 | H | 48.90 | --- | -8.91 | 39.99 | --- | 74.00 | 54.00 | -14.01 | Peak |
| 4826.67 | H | 57.90 | 37.59 | 0.56 | 58.46 | 38.15 | 74.00 | 54.00 | -15.85 | AVG |
| 5573.33 | H | 47.05 | --- | 1.51 | 48.56 | --- | 74.00 | 54.00 | -5.44 | Peak |
| 6285.00 | H | 45.18 | --- | 2.60 | 47.78 | --- | 74.00 | 54.00 | -6.22 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11b / CH Mid

Test Date: June 25, 2007

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 50 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1630.00 | V | 60.66 | --- | -8.68 | 51.98 | --- | 74.00 | 54.00 | -2.02 | Peak |
| 4873.33 | V | 61.06 | 39.35 | 0.60 | 61.66 | 39.95 | 74.00 | 54.00 | -14.05 | AVG |
| 5608.33 | V | 54.85 | 43.52 | 1.56 | 56.41 | 45.08 | 74.00 | 54.00 | -8.92 | AVG |
| 6331.67 | V | 50.64 | --- | 2.69 | 53.32 | --- | 74.00 | 54.00 | -0.68 | Peak |
| N/A | | | | | | | | | | |
| 1630.00 | H | 51.96 | --- | -8.68 | 43.28 | --- | 74.00 | 54.00 | -10.72 | Peak |
| 4873.33 | H | 57.93 | 38.83 | 0.60 | 58.53 | 39.43 | 74.00 | 54.00 | -14.57 | AVG |
| 5608.33 | H | 46.65 | --- | 1.56 | 48.21 | --- | 74.00 | 54.00 | -5.79 | Peak |
| 6331.67 | H | 45.13 | --- | 2.69 | 47.82 | --- | 74.00 | 54.00 | -6.18 | Peak |
| N/A | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH High**Test Date:** June 25, 2007**Temperature:** 25°C**Tested by:** Wolf Huang**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1641.67 | V | 61.92 | --- | -8.57 | 53.36 | --- | 74.00 | 54.00 | -0.64 | Peak |
| 4920.00 | V | 59.75 | 40.33 | 0.65 | 60.40 | 40.98 | 74.00 | 54.00 | -13.02 | AVG |
| 5631.67 | V | 60.81 | 47.85 | 1.59 | 62.40 | 49.44 | 74.00 | 54.00 | -4.56 | AVG |
| 6331.67 | V | 50.84 | --- | 2.69 | 53.52 | --- | 74.00 | 54.00 | -0.48 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| 1641.67 | H | 53.88 | --- | -8.57 | 45.32 | --- | 74.00 | 54.00 | -8.68 | Peak |
| 4920.00 | H | 57.62 | 39.60 | 0.65 | 58.27 | 40.25 | 74.00 | 54.00 | -13.75 | AVG |
| 5631.67 | H | 48.90 | --- | 1.59 | 50.49 | --- | 74.00 | 54.00 | -3.51 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH Low

Test Date: June 25, 2007

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 50 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1606.67 | V | 55.91 | --- | -8.91 | 46.99 | --- | 74.00 | 54.00 | -7.01 | Peak |
| 4826.67 | V | 52.13 | --- | 0.56 | 52.68 | --- | 74.00 | 54.00 | -1.32 | Peak |
| 5573.33 | V | 48.88 | --- | 1.51 | 50.39 | --- | 74.00 | 54.00 | -3.61 | Peak |
| 6331.67 | V | 49.08 | --- | 2.69 | 51.77 | --- | 74.00 | 54.00 | -2.23 | Peak |
| N/A | | | | | | | | | | |
| 1606.67 | H | 47.00 | --- | -8.91 | 38.08 | --- | 74.00 | 54.00 | -15.92 | Peak |
| 4826.67 | H | 48.42 | --- | 0.56 | 48.98 | --- | 74.00 | 54.00 | -5.02 | Peak |
| 5585.00 | H | 45.05 | --- | 1.52 | 46.58 | --- | 74.00 | 54.00 | -7.42 | Peak |
| 6331.67 | H | 44.66 | --- | 2.69 | 47.34 | --- | 74.00 | 54.00 | -6.66 | Peak |
| N/A | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH Mid

Test Date: June 25, 2007

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 50 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1630.00 | V | 60.62 | --- | -8.68 | 51.93 | --- | 74.00 | 54.00 | -2.07 | Peak |
| 4873.33 | V | 54.14 | 36.93 | 0.60 | 54.74 | 37.53 | 74.00 | 54.00 | -16.47 | AVG |
| 5608.33 | V | 48.76 | --- | 1.56 | 50.32 | --- | 74.00 | 54.00 | -3.68 | Peak |
| 6331.67 | V | 48.65 | --- | 2.69 | 51.34 | --- | 74.00 | 54.00 | -2.66 | Peak |
| N/A | | | | | | | | | | |
| 1011.67 | H | 49.91 | --- | -10.77 | 39.14 | --- | 74.00 | 54.00 | -14.86 | Peak |
| 1630.00 | H | 48.48 | --- | -8.68 | 39.80 | --- | 74.00 | 54.00 | -14.20 | Peak |
| 4873.33 | H | 49.15 | --- | 0.60 | 49.75 | --- | 74.00 | 54.00 | -4.25 | Peak |
| 5608.33 | H | 45.35 | --- | 1.56 | 46.90 | --- | 74.00 | 54.00 | -7.10 | Peak |
| 6331.67 | H | 44.65 | --- | 2.69 | 47.34 | --- | 74.00 | 54.00 | -6.66 | Peak |
| N/A | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH High

Test Date: June 25, 2007

Temperature: 25°C

Tested by: Wolf Huang

Humidity: 50 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1641.67 | V | 60.10 | --- | -8.57 | 51.53 | --- | 74.00 | 54.00 | -2.47 | Peak |
| 4920.00 | V | 54.72 | 36.56 | 0.65 | 55.37 | 37.21 | 74.00 | 54.00 | -16.79 | AVG |
| 5620.00 | V | 50.71 | --- | 1.57 | 52.28 | --- | 74.00 | 54.00 | -1.72 | Peak |
| 6331.67 | V | 49.24 | --- | 2.69 | 51.92 | --- | 74.00 | 54.00 | -2.08 | Peak |
| N/A | | | | | | | | | | |
| 1373.33 | H | 47.83 | --- | -10.18 | 37.65 | --- | 74.00 | 54.00 | -16.35 | Peak |
| 1641.67 | H | 52.97 | --- | -8.57 | 44.41 | --- | 74.00 | 54.00 | -9.59 | Peak |
| 4920.00 | H | 48.37 | --- | 0.65 | 49.02 | --- | 74.00 | 54.00 | -4.98 | Peak |
| N/A | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.7 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency Range (MHz) | Limits (dB μ V) | |
|--------------------------|------------------------|-----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56* | 56 to 46* |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Operation Mode: Normal Link **Test Date:** June 15, 2007
Temperature: 27°C **Tested by:** John Yen
Humidity: 70% RH

| Freq. (MHz) | QP Reading (dBuV) | AV Reading (dBuV) | Corr. factor (dB) | QP Result (dBuV) | AV Result (dBuV) | QP Limit (dBuV) | AV Limit (dBuV) | QP Margin (dB) | AV Margin (dB) | Note |
|-------------|-------------------|-------------------|-------------------|------------------|------------------|-----------------|-----------------|----------------|----------------|------|
| 0.150 | 58.34 | 33.96 | 0.51 | 58.85 | 34.47 | 66.00 | 56.00 | -7.15 | -21.53 | L1 |
| 0.302 | 47.76 | --- | 0.51 | 48.27 | --- | 60.19 | --- | -11.92 | --- | L1 |
| 0.679 | 36.37 | --- | 0.63 | 37.00 | --- | 56.00 | --- | -19.00 | --- | L1 |
| 1.054 | 33.38 | --- | 0.63 | 34.01 | --- | 56.00 | --- | -21.99 | --- | L1 |
| 6.454 | 37.21 | --- | 0.90 | 38.11 | --- | 60.00 | --- | -21.89 | --- | L1 |
| 29.684 | 36.34 | --- | 2.04 | 38.38 | --- | 60.00 | --- | -21.62 | --- | L1 |
| 0.156 | 57.48 | 26.40 | 0.11 | 57.59 | 26.51 | 65.69 | 55.69 | -8.10 | -29.18 | L2 |
| 0.300 | 46.69 | --- | 0.11 | 46.80 | --- | 60.24 | --- | -13.43 | --- | L2 |
| 0.604 | 37.83 | --- | 0.13 | 37.96 | --- | 56.00 | --- | -18.04 | --- | L2 |
| 1.100 | 33.54 | --- | 0.14 | 33.68 | --- | 56.00 | --- | -22.32 | --- | L2 |
| 6.186 | 37.42 | --- | 0.44 | 37.87 | --- | 60.00 | --- | -22.13 | --- | L2 |
| 30.000 | 37.35 | --- | 1.75 | 39.10 | --- | 60.00 | --- | -20.90 | --- | L2 |

Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)




Test Plots

Conducted emissions (Line 1)

Data#: 149 File#: 70504203CA.EMI

Date: 2007-06-15 Time: 22:46:23

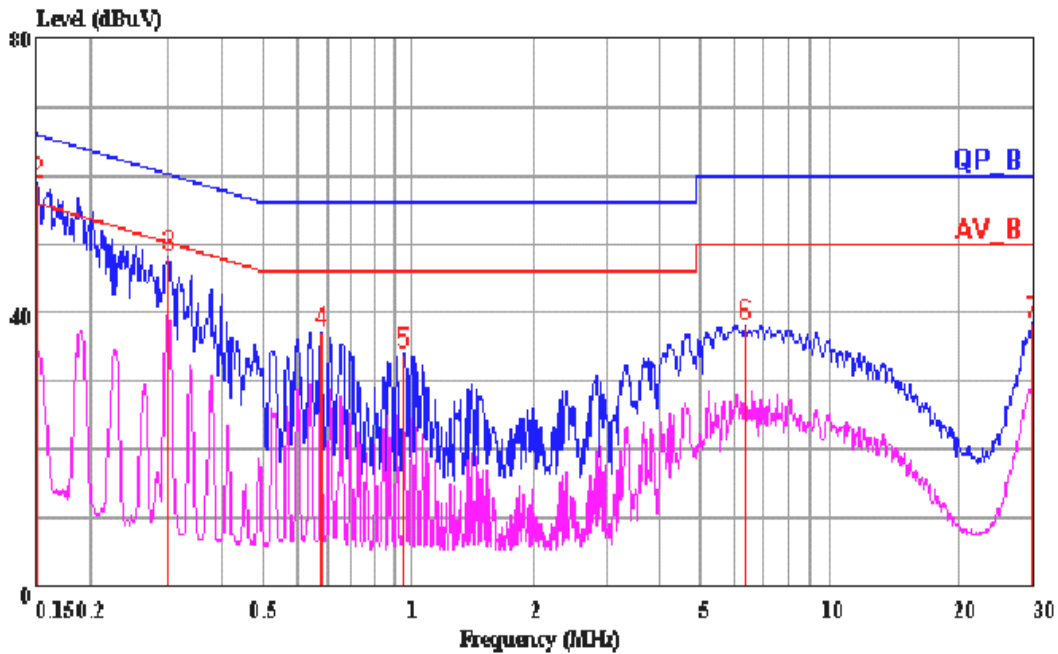

(Conduction A)


Trace: 145 146

Ref Trace:

Conducted emissions (Line 2)

Data#: 154 File#: 70504203CA.EMI

Date: 2007-06-15 Time: 22:49:28

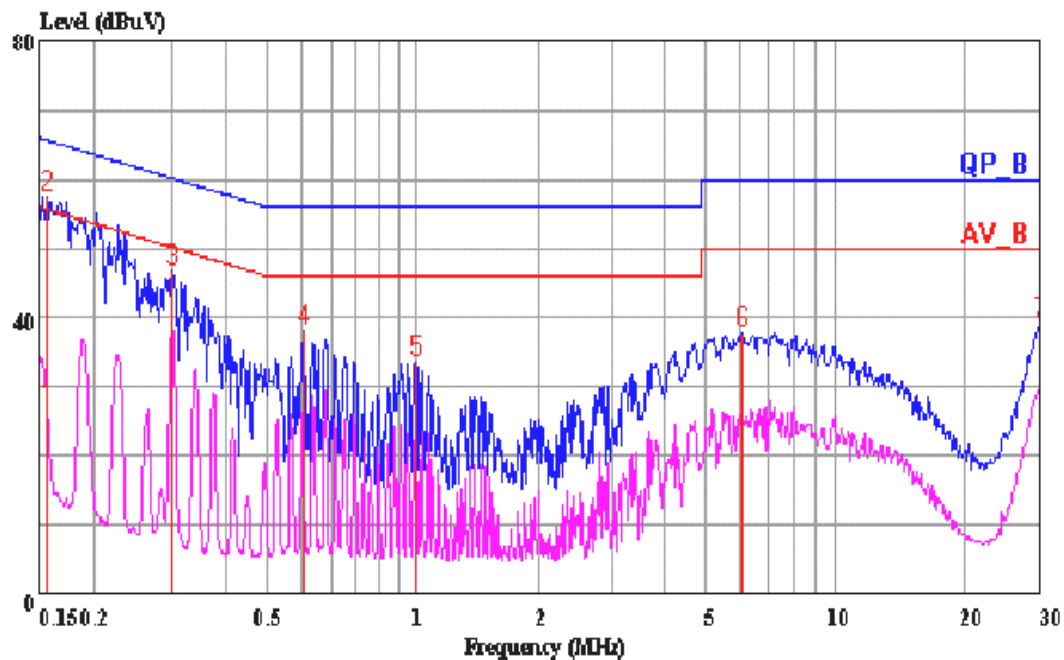

(Conduction A)

Trace: 150 151

Ref Trace: