


EUT : WPS54G
 Power : 110W 60Hz
 Test Mode : 802.11g CH L0
 Memo :


Pol/Phase : NEUTRAL
 Temperature : 26 °C
 Humidity : 59 %

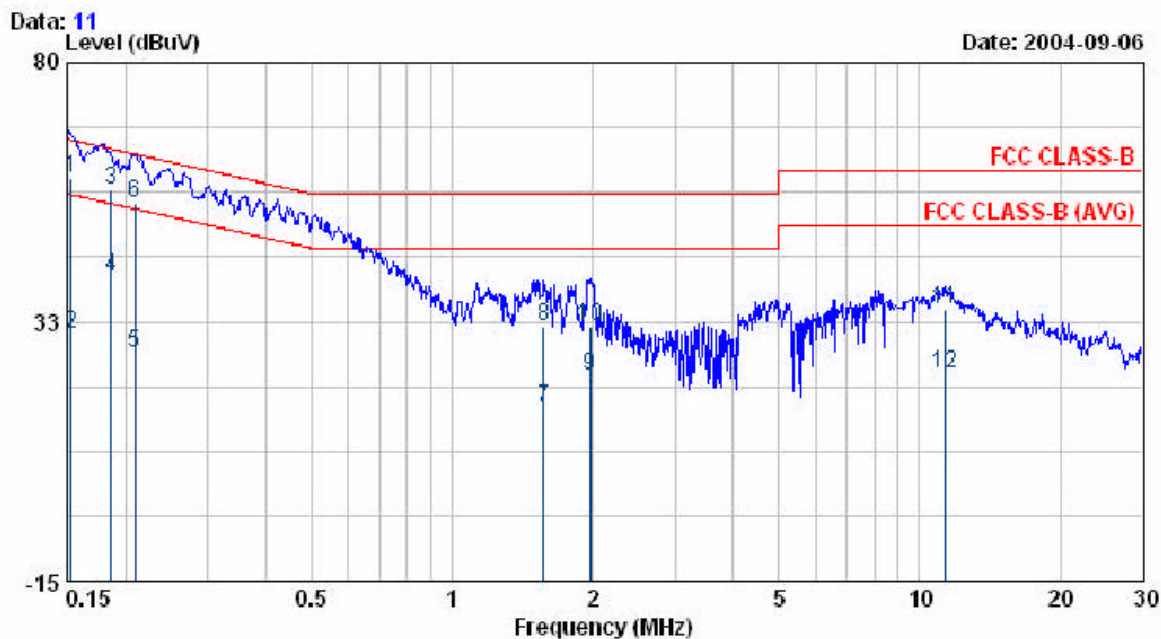

| Freq | Read Level | Factor | Level | Limit | Over Limit | Remark |
|--------|------------|--------|-------|-------|------------|---------|
| MHz | dBuV | dB | dBuV | dBuV | dBuV | |
| 0.153 | 58.33 | 0.40 | 58.73 | 65.84 | -7.10 | QP |
| 0.153 | 29.93 | 0.40 | 30.33 | 55.84 | -25.50 | AVERAGE |
| 0.186 | 56.33 | 0.41 | 56.74 | 64.20 | -7.46 | QP |
| 0.186 | 40.40 | 0.41 | 40.81 | 54.20 | -13.39 | AVERAGE |
| 0.209 | 26.17 | 0.42 | 26.59 | 53.23 | -26.64 | AVERAGE |
| 0.209 | 53.72 | 0.42 | 54.14 | 63.23 | -9.09 | QP |
| 1.569 | 16.00 | 0.53 | 16.53 | 46.00 | -29.47 | AVERAGE |
| 1.569 | 31.00 | 0.53 | 31.53 | 56.00 | -24.47 | QP |
| 1.973 | 21.95 | 0.54 | 22.49 | 46.00 | -23.51 | AVERAGE |
| 1.973 | 31.20 | 0.54 | 31.74 | 56.00 | -24.26 | QP |
| 11.315 | 34.15 | 0.73 | 34.88 | 60.00 | -25.12 | QP |
| 11.315 | 22.25 | 0.73 | 22.98 | 50.00 | -27.02 | AVERAGE |

EUT : WPS54G
 Power : 110V 60Hz
 Test Mode : 802.11g CH L0
 Memo :

Pol/Phase : LINE
 Temperature : 26 °C
 Humidity : 59 %

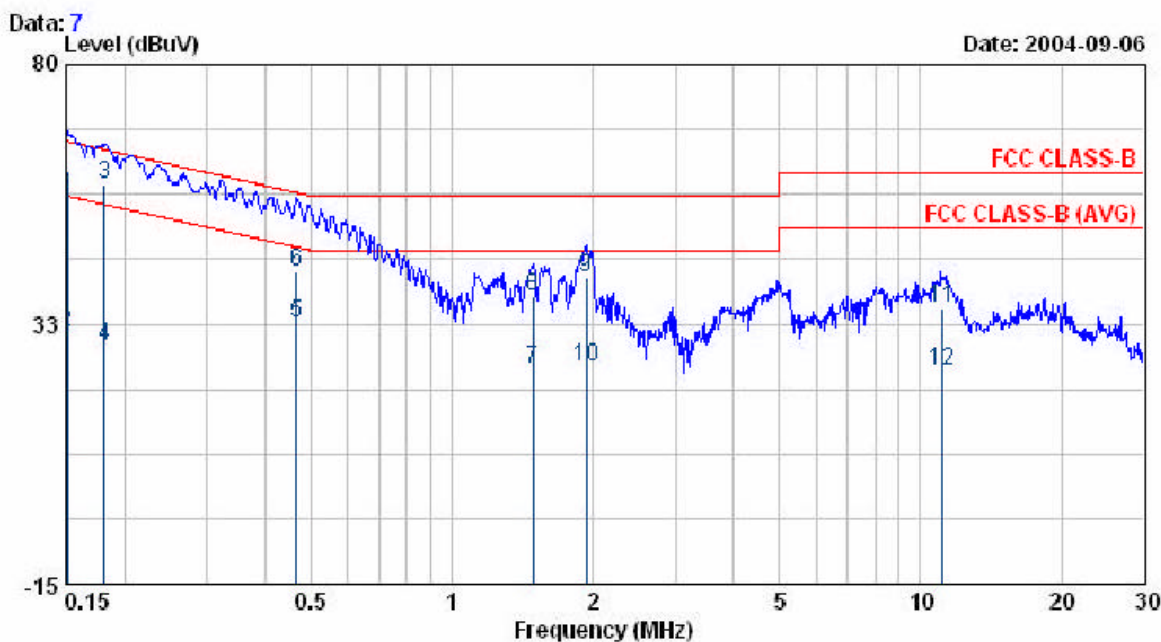

| Freq | Read Level | Factor | Level | Limit | Over Limit | Remark |
|--------|------------|--------|-------|-------|------------|---------|
| MHz | dBuV | dB | dBuV | dBuV | dBuV | |
| 0.151 | 60.15 | 0.40 | 60.55 | 65.92 | -5.37 | QP |
| 0.151 | 30.69 | 0.40 | 31.09 | 55.92 | -24.83 | AVERAGE |
| 0.181 | 57.62 | 0.41 | 58.03 | 64.44 | -6.40 | QP |
| 0.181 | 28.15 | 0.41 | 28.56 | 54.44 | -25.87 | AVERAGE |
| 0.466 | 32.37 | 0.47 | 32.84 | 46.58 | -13.75 | AVERAGE |
| 0.466 | 41.70 | 0.47 | 42.17 | 56.58 | -14.42 | QP |
| 1.489 | 23.66 | 0.53 | 24.19 | 46.00 | -21.81 | AVERAGE |
| 1.489 | 37.10 | 0.53 | 37.63 | 56.00 | -18.37 | QP |
| 1.938 | 40.50 | 0.54 | 41.04 | 56.00 | -14.96 | QP |
| 1.938 | 24.00 | 0.54 | 24.54 | 46.00 | -21.46 | AVERAGE |
| 11.106 | 34.67 | 0.66 | 35.33 | 60.00 | -24.67 | QP |
| 11.106 | 23.27 | 0.66 | 23.93 | 50.00 | -26.07 | AVERAGE |


EUT : WPS54G
 Power : 110V 60Hz
 Test Mode : 802.11g CH MID
 Memo :

Pol/Phase : NEUTRAL
 Temperature : 26 °C
 Humidity : 59 %

Data: 12

Level (dBuV)


Date: 2004-09-06

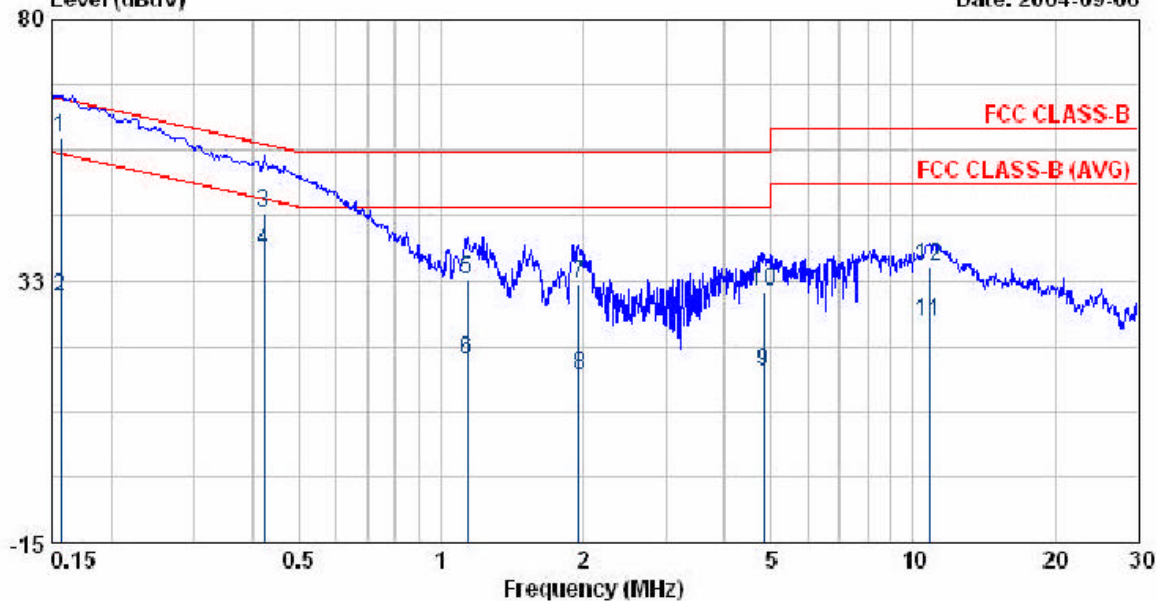

| Freq | Read Level | Factor | Level | Limit | Over Limit | Remark |
|--------|------------|--------|-------|-------|------------|---------|
| MHz | dBuV | dB | dBuV | dBuV | dBuV | |
| 0.157 | 58.18 | 0.40 | 58.58 | 65.65 | -7.07 | QP |
| 0.157 | 28.98 | 0.40 | 29.38 | 55.65 | -26.27 | AVERAGE |
| 0.423 | 44.28 | 0.46 | 44.74 | 57.39 | -12.65 | QP |
| 0.423 | 37.44 | 0.46 | 37.90 | 47.39 | -9.49 | AVERAGE |
| 1.138 | 32.27 | 0.52 | 32.79 | 56.00 | -23.21 | QP |
| 1.138 | 17.71 | 0.52 | 18.23 | 46.00 | -27.77 | AVERAGE |
| 1.964 | 31.50 | 0.54 | 32.04 | 56.00 | -23.96 | QP |
| 1.964 | 14.60 | 0.54 | 15.14 | 46.00 | -30.86 | AVERAGE |
| 4.829 | 15.29 | 0.60 | 15.89 | 46.00 | -30.11 | AVERAGE |
| 4.829 | 30.11 | 0.60 | 30.71 | 56.00 | -25.29 | QP |
| 10.855 | 24.19 | 0.73 | 24.92 | 50.00 | -25.08 | AVERAGE |
| 10.855 | 34.22 | 0.73 | 34.95 | 60.00 | -25.05 | QP |

EUT : WPS54G
 Power : 110V 60Hz
 Test Mode : 802.11g CH MID
 Memo :


Pol/Phase : LINE
 Temperature : 26 °C
 Humidity : 59 %

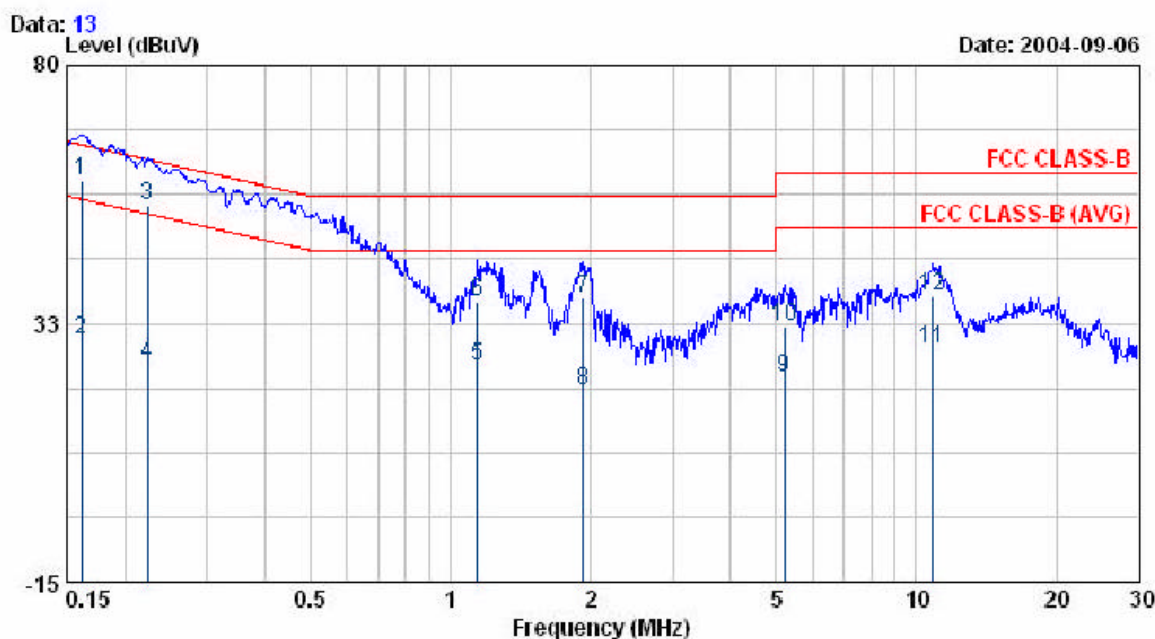

| Freq | Read Level | Factor | Level | Limit | Over Limit | Remark |
|--------|------------|--------|-------|-------|------------|---------|
| MHz | dBuV | dB | dBuV | dBuV | dBuV | |
| 0.162 | 58.34 | 0.40 | 58.74 | 65.38 | -6.64 | QP |
| 0.162 | 28.98 | 0.40 | 29.38 | 55.38 | -26.00 | AVERAGE |
| 0.224 | 53.68 | 0.42 | 54.10 | 62.68 | -8.58 | QP |
| 0.224 | 24.50 | 0.42 | 24.92 | 52.68 | -27.76 | AVERAGE |
| 1.141 | 24.21 | 0.52 | 24.73 | 46.00 | -21.27 | AVERAGE |
| 1.141 | 35.93 | 0.52 | 36.45 | 56.00 | -19.55 | QP |
| 1.926 | 36.70 | 0.54 | 37.24 | 56.00 | -18.76 | QP |
| 1.926 | 19.51 | 0.54 | 20.05 | 46.00 | -25.95 | AVERAGE |
| 5.218 | 22.12 | 0.59 | 22.71 | 50.00 | -27.29 | AVERAGE |
| 5.218 | 31.32 | 0.59 | 31.91 | 60.00 | -28.09 | QP |
| 10.859 | 27.06 | 0.65 | 27.71 | 50.00 | -22.29 | AVERAGE |
| 10.859 | 36.76 | 0.65 | 37.41 | 60.00 | -22.59 | QP |

EUT : WPS54G
 Power : 110W 60Hz
 Test Mode : 802.11g CH HI
 Memo :


Pol/Phase : NEUTRAL
 Temperature : 26 °C
 Humidity : 59 %

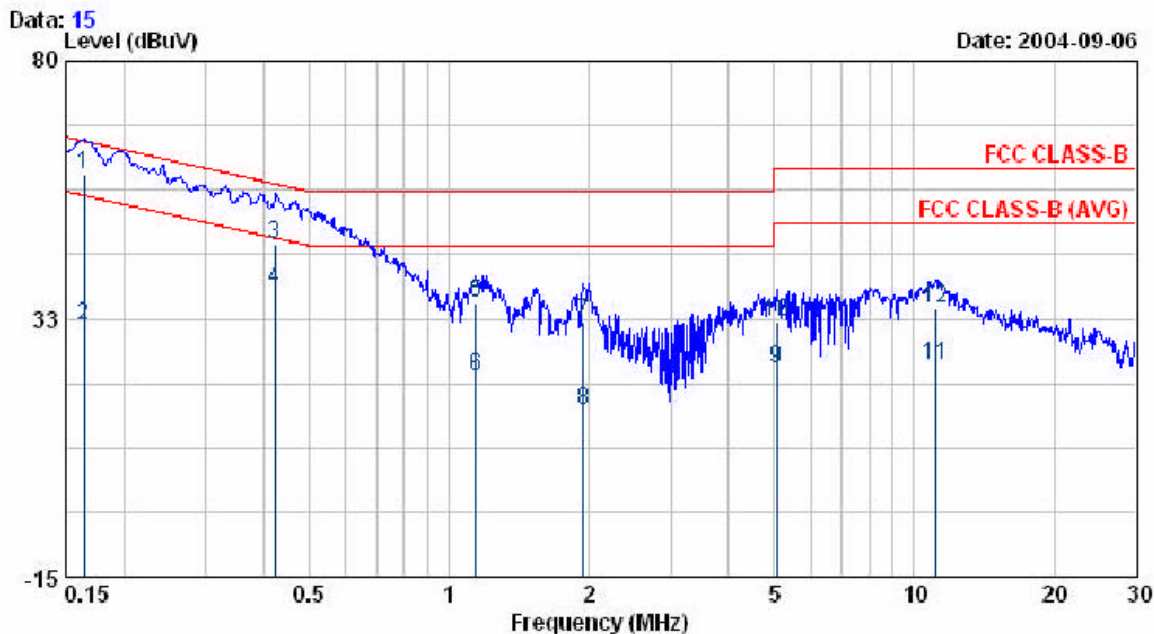

| Freq | Read Level | Factor | Level | Limit | Over Limit | Remark |
|--------|------------|--------|-------|-------|------------|---------|
| MHz | dBuV | dB | dBuV | dBuV | dBuV | |
| 0.164 | 58.59 | 0.41 | 59.00 | 65.25 | -6.25 | QP |
| 0.164 | 31.05 | 0.41 | 31.46 | 55.25 | -23.79 | AVERAGE |
| 0.423 | 45.69 | 0.46 | 46.15 | 57.39 | -11.24 | QP |
| 0.423 | 37.52 | 0.46 | 37.98 | 47.39 | -9.41 | AVERAGE |
| 1.142 | 34.80 | 0.52 | 35.32 | 56.00 | -20.68 | QP |
| 1.142 | 21.41 | 0.52 | 21.93 | 46.00 | -24.07 | AVERAGE |
| 1.944 | 31.46 | 0.54 | 32.00 | 56.00 | -24.00 | QP |
| 1.944 | 15.06 | 0.54 | 15.60 | 46.00 | -30.40 | AVERAGE |
| 5.074 | 22.79 | 0.61 | 23.40 | 50.00 | -26.60 | AVERAGE |
| 5.074 | 31.50 | 0.61 | 32.11 | 60.00 | -27.89 | QP |
| 11.186 | 23.18 | 0.73 | 23.91 | 50.00 | -26.09 | AVERAGE |
| 11.186 | 33.54 | 0.73 | 34.27 | 60.00 | -25.73 | QP |

EUT : WPS54G
 Power : 110V 60Hz
 Test Mode : 802.11g CH HI
 Memo :

Pol/Phase : LINE
 Temperature : 26 °C
 Humidity : 59 %

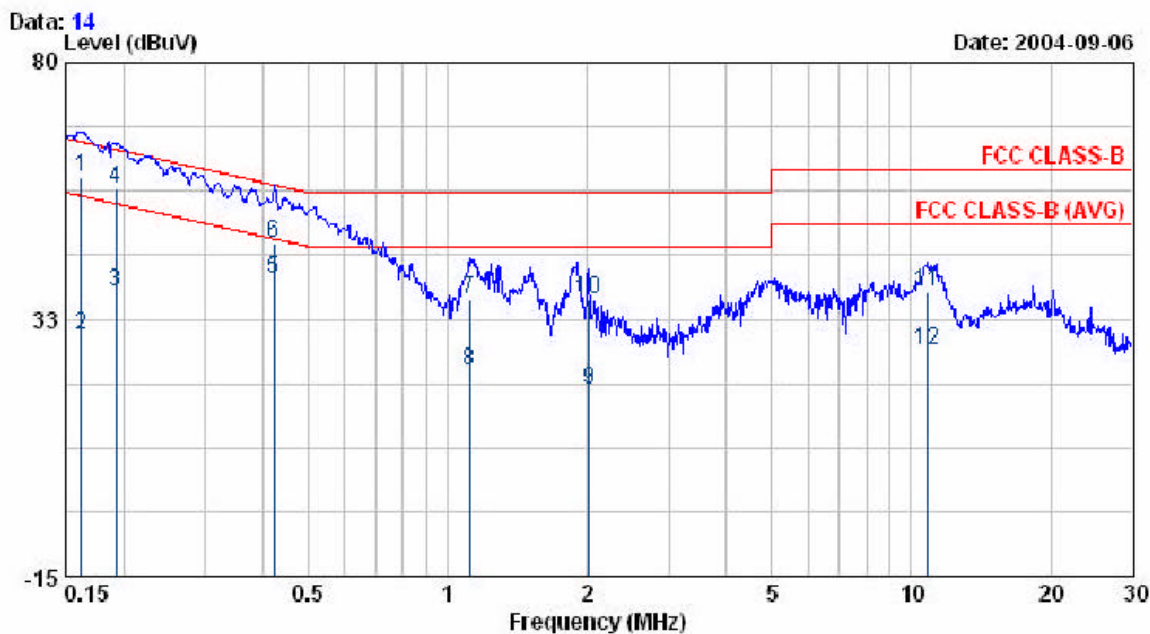

| Freq | Read Level | Factor | Level | Limit | Over Limit | Remark |
|--------|------------|--------|-------|-------|------------|---------|
| MHz | dBuV | dB | dBuV | dBuV | dBuV | |
| 0.162 | 58.47 | 0.40 | 58.87 | 65.34 | -6.47 | QP |
| 0.162 | 29.26 | 0.40 | 29.66 | 55.34 | -25.68 | AVERAGE |
| 0.193 | 37.10 | 0.41 | 37.51 | 53.92 | -16.40 | AVERAGE |
| 0.193 | 56.30 | 0.41 | 56.71 | 63.92 | -7.20 | QP |
| 0.423 | 39.52 | 0.46 | 39.98 | 47.39 | -7.41 | AVERAGE |
| 0.423 | 46.10 | 0.46 | 46.56 | 57.39 | -10.83 | QP |
| 1.116 | 35.52 | 0.52 | 36.04 | 56.00 | -19.96 | QP |
| 1.116 | 22.31 | 0.52 | 22.83 | 46.00 | -23.17 | AVERAGE |
| 2.016 | 18.90 | 0.54 | 19.44 | 46.00 | -26.56 | AVERAGE |
| 2.016 | 35.70 | 0.54 | 36.24 | 56.00 | -19.76 | QP |
| 10.859 | 36.77 | 0.65 | 37.42 | 60.00 | -22.58 | QP |
| 10.859 | 26.22 | 0.65 | 26.87 | 50.00 | -23.13 | AVERAGE |

Test by: Carol


4.2.1. Photographs of Conducted Emission Test

FRONT VIEW




REAR VIEW




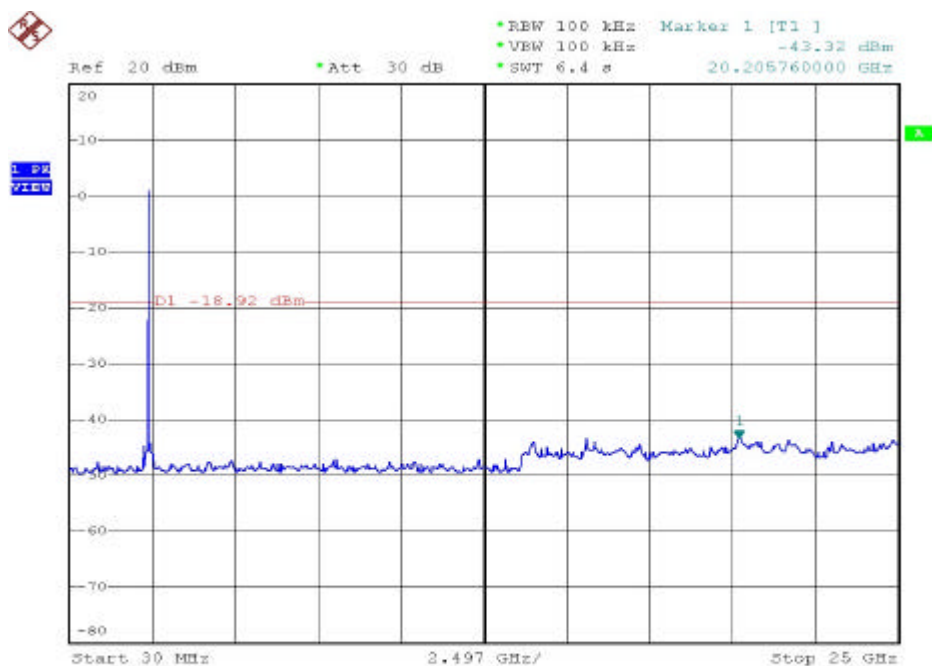


Date: 8.SEP.2004 16:16:50

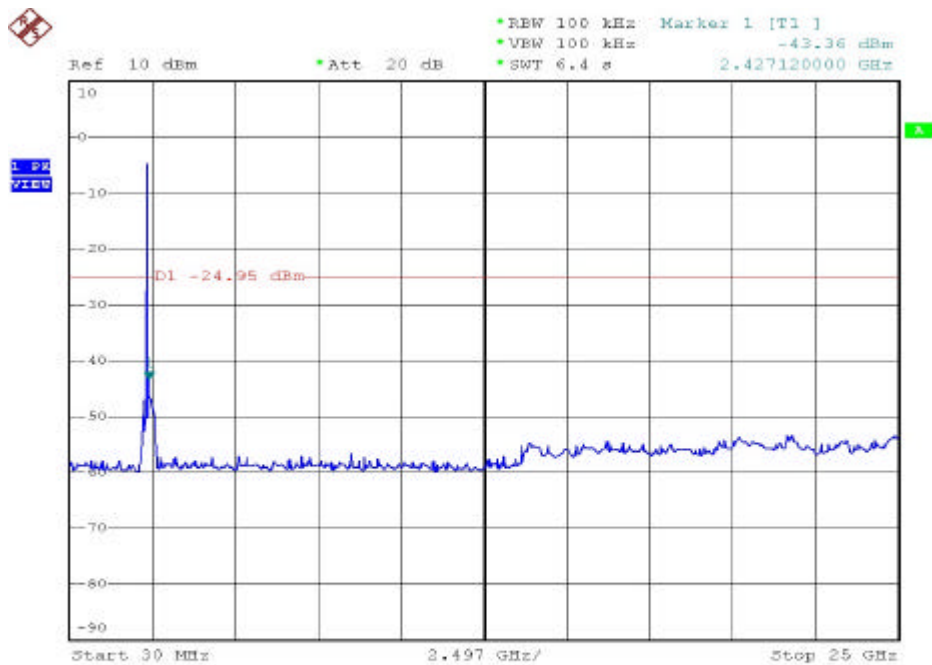

Date: 8.SEP.2004 16:24:53

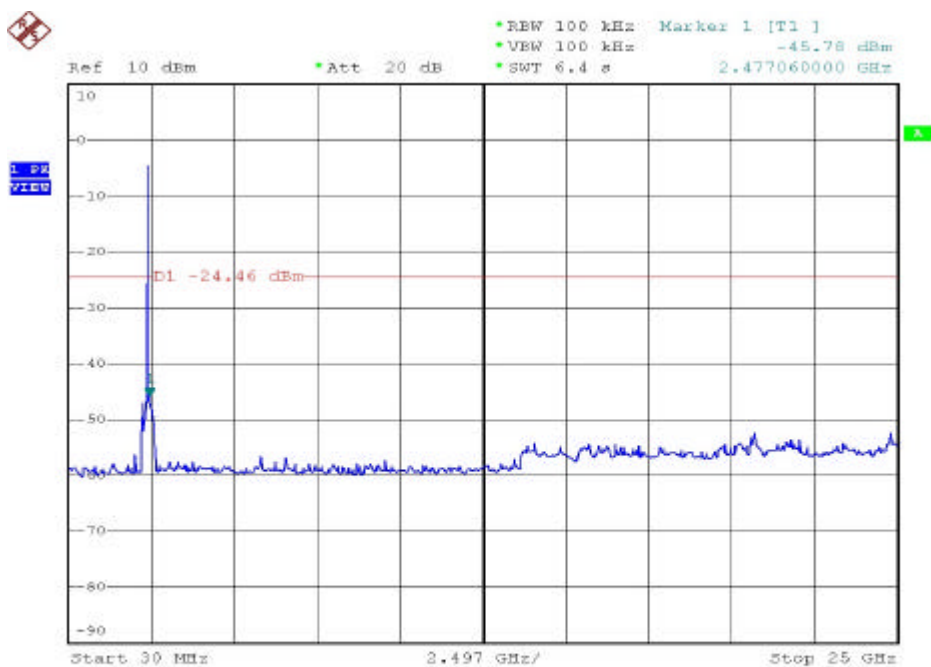

Date: 8.SEP.2004 16:27:06

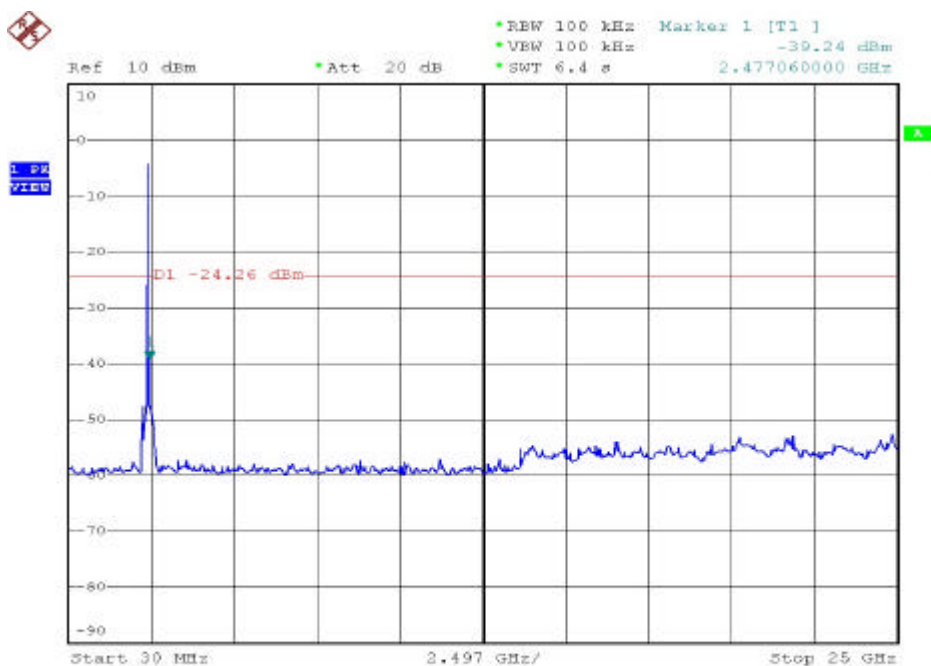

Date: 8.SEP.2004 16:29:00

4.3.2. Test Result of Radiated Emission

Modulation Standard: IEEE 802.11b

a) Emission frequencies below 1 GHz Channel LO

Test Date: Sep. 14, 2004 Temperature: 24 Humidity: 63%

| Frequency (MHz) | Ant-Pol H/V | Meter Reading (dBuV) | Corrected Factor (dB) | Result@3m (dBuV/m) | Limit@3m (dBuV/m) | Margin (dB) | Remark | Table Deg. | Ant High (m) |
|-----------------|-------------|----------------------|-----------------------|--------------------|-------------------|-------------|--------|------------|--------------|
| 480.00 | H | 51.02 | -6.55 | 44.47 | 46 | -1.53 | Q.P | 100 | 1.0 |
| 800.18 | H | 43.66 | 0.73 | 44.39 | 46 | -1.61 | Q.P | 120 | 1.0 |
| 33.88 | V | 48.22 | -11.17 | 37.05 | 40 | -2.95 | Q.P | 135 | 1.0 |
| 50.55 | V | 56.27 | -19.69 | 36.58 | 40 | -3.41 | Peak | 116 | 1.0 |
| 56.19 | V | 56.98 | -19.75 | 37.23 | 40 | -2.77 | Q.P | 160 | 1.0 |
| 800.18 | V | 43.84 | 0.72 | 44.56 | 46 | -1.44 | Q.P | 105 | 1.0 |

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss – Amplifier

b) Emission frequencies above 1 GHz Channel LO

| Frequency (MHz) | Ant-Pol H/V | Meter Reading (dBuV) | Corrected Factor (dB) | Result@3m (dBuV/m) | Limit@3m (dBuV/m) | Margin (dB) | Remark | Table Deg. | Ant High (m) |
|-----------------|-------------|----------------------|-----------------------|--------------------|-------------------|-------------|--------|------------|--------------|
| 1591.5 | H | 55.94 | -4.34 | 51.60 | 74 | -22.40 | Peak | 196 | 1.5 |
| 1600.0 | V | 59.37 | -4.88 | 54.49 | 74 | -19.51 | Peak | 210 | 1.5 |
| 1600.0 | V | 54.57 | -4.83 | 49.74 | 54 | -4.26 | Ave | 215 | 1.5 |
| 1903.5 | V | 52.49 | -3.16 | 49.33 | 74 | -24.67 | Peak | 185 | 1.5 |
| 4823.0 | V | 51.10 | 6.46 | 57.56 | 74 | -16.44 | Peak | 177 | 1.5 |
| 4823.0 | V | 35.72 | 6.48 | 42.20 | 54 | -11.80 | Ave | 182 | 1.5 |

Modulation Standard: IEEE 802.11b

a) Emission frequencies below 1 GHz Channel MID

Test Date: Sep. 14, 2004 Temperature: 24 Humidity: 63%

| Frequency (MHz) | Ant-Pol H/V | Meter Reading (dBuV) | Corrected Factor (dB) | Result@3m (dBuV/m) | Limit@3m (dBuV/m) | Margin (dB) | Remark | Table Deg. | Ant High (m) |
|-----------------|-------------|----------------------|-----------------------|--------------------|-------------------|-------------|--------|------------|--------------|
| 800.18 | H | 43.60 | 0.73 | 44.33 | 46 | -1.67 | Q.P | 126 | 1.0 |
| 51.34 | V | 58.73 | -20.07 | 38.67 | 40 | -1.33 | Q.P | 96 | 1.0 |
| 56.19 | V | 56.91 | -19.75 | 37.16 | 40 | -2.84 | Q.P | 120 | 1.0 |
| 800.18 | V | 43.97 | 0.73 | 44.71 | 46 | -1.29 | Q.P | 130 | 1.0 |

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss – Amplifier

b) Emission frequencies above 1 GHz Channel MID

| Frequency (MHz) | Ant-Pol H/V | Meter Reading (dBuV) | Corrected Factor (dB) | Result@3m (dBuV/m) | Limit@3m (dBuV/m) | Margin (dB) | Remark | Table Deg. | Ant High (m) |
|-----------------|-------------|----------------------|-----------------------|--------------------|-------------------|-------------|--------|------------|--------------|
| 1591.5 | H | 55.94 | -4.34 | 51.60 | 74 | -22.40 | Peak | 205 | 1.5 |
| 1600.0 | V | 59.77 | -4.88 | 54.90 | 74 | -19.10 | Peak | 225 | 1.5 |
| 1600.0 | V | 54.50 | -4.83 | 49.67 | 54 | -4.33 | Ave | 220 | 1.5 |
| 1903.5 | V | 52.37 | -3.16 | 49.21 | 74 | -24.79 | Peak | 192 | 1.5 |
| 4872.0 | V | 53.47 | 6.63 | 60.09 | 74 | -13.91 | Peak | 185 | 1.5 |
| 4872.0 | V | 35.06 | 6.64 | 41.70 | 54 | -12.30 | Ave | 192 | 1.5 |

Modulation Standard: IEEE 802.11b

a) Emission frequencies below 1 GHz Channel HI

Test Date: Sep. 14, 2004 Temperature: 24 Humidity: 63%

| Frequency (MHz) | Ant-Pol H/V | Meter Reading (dBuV) | Corrected Factor (dB) | Result@3m (dBuV/m) | Limit@3m (dBuV/m) | Margin (dB) | Remark | Table Deg. | Ant High (m) |
|-----------------|-------------|----------------------|-----------------------|--------------------|-------------------|-------------|--------|------------|--------------|
| 800.18 | H | 42.81 | 0.73 | 43.54 | 46 | -2.46 | Q.P | 120 | 1.0 |
| 51.34 | V | 58.12 | -20.07 | 38.06 | 40 | -1.94 | Q.P | 100 | 1.0 |
| 56.19 | V | 56.68 | -19.75 | 36.93 | 40 | -3.07 | Peak | 113 | 1.0 |
| 800.18 | V | 43.97 | 0.73 | 44.71 | 46 | -1.29 | Q.P | 120 | 1.0 |

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss – Amplifier

b) Emission frequencies above 1 GHz Channel HI

| Frequency (MHz) | Ant-Pol H/V | Meter Reading (dBuV) | Corrected Factor (dB) | Result@3m (dBuV/m) | Limit@3m (dBuV/m) | Margin (dB) | Remark | Table Deg. | Ant High (m) |
|-----------------|-------------|----------------------|-----------------------|--------------------|-------------------|-------------|--------|------------|--------------|
| 1519.5 | H | 56.44 | -4.34 | 52.10 | 74 | -21.90 | Peak | 205 | 1.5 |
| 1600.0 | V | 59.66 | -4.88 | 54.78 | 74 | -19.22 | Peak | 210 | 1.5 |
| 1600.0 | V | 54.58 | -4.33 | 49.75 | 74 | -24.25 | Ave | 215 | 1.5 |
| 1903.5 | V | 52.83 | -3.16 | 49.67 | 74 | -24.33 | Peak | 200 | 1.5 |
| 4923.2 | V | 52.81 | 6.80 | 59.61 | 74 | -14.39 | Peak | 185 | 1.5 |
| 4923.2 | V | 35.96 | 6.81 | 42.77 | 54 | -11.23 | Ave | 178 | 1.5 |

Modulation Standard: IEEE 802.11g

a) Emission frequencies below 1 GHz Channel LO

Test Date: Sep. 14, 2004 Temperature: 24 Humidity: 63%

| Frequency (MHz) | Ant-Pol H/V | Meter Reading (dBuV) | Corrected Factor (dB) | Result@3m (dBuV/m) | Limit@3m (dBuV/m) | Margin (dB) | Remark | Table Deg. | Ant High (m) |
|-----------------|-------------|----------------------|-----------------------|--------------------|-------------------|-------------|--------|------------|--------------|
| 800.18 | H | 43.39 | 0.73 | 44.12 | 46 | -1.88 | Q.P | 125 | 1.0 |
| 51.34 | V | 58.32 | -20.07 | 38.26 | 40 | -1.74 | Q.P | 99 | 1.0 |
| 56.19 | V | 57.05 | -19.75 | 37.30 | 40 | -2.70 | Q.P | 116 | 1.0 |
| 800.18 | V | 47.58 | 0.73 | 44.32 | 46 | -1.67 | Q.P | 132 | 1.0 |

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss – Amplifier

b) Emission frequencies above 1 GHz Channel LO

| Frequency (MHz) | Ant-Pol H/V | Meter Reading (dBuV) | Corrected Factor (dB) | Result@3m (dBuV/m) | Limit@3m (dBuV/m) | Margin (dB) | Remark | Table Deg. | Ant High (m) |
|-----------------|-------------|----------------------|-----------------------|--------------------|-------------------|-------------|--------|------------|--------------|
| 1591.5 | H | 55.85 | -4.34 | 51.51 | 74 | -22.49 | Peak | 210 | 1.5 |
| 1600.0 | V | 59.64 | -4.88 | 54.77 | 74 | -19.23 | Peak | 200 | 1.5 |
| 1600.0 | V | 54.47 | -4.83 | 49.64 | 54 | -4.36 | Ave | 205 | 1.5 |
| 1903.5 | V | 52.37 | -3.16 | 49.21 | 74 | -24.79 | Peak | 192 | 1.5 |
| 4825.8 | V | 49.8 | 6.46 | 56.26 | 74 | -17.74 | Peak | 185 | 1.5 |
| 4825.8 | V | 33.52 | 6.49 | 40.01 | 54 | -13.99 | Ave | 190 | 1.5 |

Modulation Standard: IEEE 802.11g

a) Emission frequencies below 1 GHz Channel MID

Test Date: Sep. 14, 2004 Temperature: 24 Humidity: 63%

| Frequency (MHz) | Ant-Pol H/V | Meter Reading (dBuV) | Corrected Factor (dB) | Result@3m (dBuV/m) | Limit@3m (dBuV/m) | Margin (dB) | Remark | Table Deg. | Ant High (m) |
|-----------------|-------------|----------------------|-----------------------|--------------------|-------------------|-------------|--------|------------|--------------|
| 800.18 | H | 43.09 | 0.73 | 43.82 | 46 | -2.18 | Q.P | 132 | 1.0 |
| 51.34 | V | 58.39 | -20.07 | -38.33 | 40 | -1.67 | Q.P | 102 | 1.0 |
| 56.19 | V | 56.61 | -19.75 | 36.86 | 40 | -3.14 | Peak | 120 | 1.0 |
| 800.18 | V | 43.35 | 0.73 | 44.09 | 46 | -1.91 | Q.P | 115 | 1.0 |

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss – Amplifier

b) Emission frequencies above 1 GHz Channel MID

| Frequency (MHz) | Ant-Pol H/V | Meter Reading (dBuV) | Corrected Factor (dB) | Result@3m (dBuV/m) | Limit@3m (dBuV/m) | Margin (dB) | Remark | Table Deg. | Ant High (m) |
|-----------------|-------------|----------------------|-----------------------|--------------------|-------------------|-------------|--------|------------|--------------|
| 1591.5 | H | 56.31 | -4.34 | 51.97 | 74 | -22.03 | Peak | 215 | 1.5 |
| 1600.0 | V | 55.17 | -4.83 | 50.34 | 54 | -3.66 | Ave | 200 | 1.5 |
| 1600.0 | V | 59.30 | -4.88 | 54.43 | 74 | -19.57 | Peak | 210 | 1.5 |
| 1903.5 | V | 51.80 | -3.16 | 48.64 | 74 | -25.36 | Peak | 196 | 1.5 |
| 4887.0 | V | 51.15 | 6.69 | 57.85 | 74 | -16.15 | Peak | 205 | 1.5 |
| 4887.0 | V | 33.29 | 6.65 | 39.94 | 54 | -14.06 | Ave | 185 | 1.5 |
| 7311.0 | V | 50.46 | 10.40 | 60.86 | 74 | -13.14 | Peak | 179 | 1.5 |
| 7311.0 | V | 35.67 | 10.39 | 46.06 | 54 | -7.94 | Ave | 175 | 1.5 |

Modulation Standard: IEEE 802.11g

a) Emission frequencies below 1 GHz Channel HI

Test Date: Sep. 14, 2004 Temperature: 24 Humidity: 63%

| Frequency (MHz) | Ant-Pol H/V | Meter Reading (dBuV) | Corrected Factor (dB) | Result@3m (dBuV/m) | Limit@3m (dBuV/m) | Margin (dB) | Remark | Table Deg. | Ant High (m) |
|-----------------|-------------|----------------------|-----------------------|--------------------|-------------------|-------------|--------|------------|--------------|
| 800.18 | H | 43.51 | 0.73 | 44.24 | 46 | -1.76 | Q.P | 120 | 1.0 |
| 51.34 | V | 58.62 | -20.07 | 38.56 | 40 | -1.44 | Q.P | 95 | 1.0 |
| 56.19 | V | 57.14 | -19.75 | 37.39 | 40 | -2.61 | Q.P | 110 | 1.0 |
| 800.18 | V | 43.72 | 0.73 | 44.46 | 46 | -1.54 | Q.P | 106 | 1.0 |

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss – Amplifier

b) Emission frequencies above 1 GHz Channel HI

| Frequency (MHz) | Ant-Pol H/V | Meter Reading (dBuV) | Corrected Factor (dB) | Result@3m (dBuV/m) | Limit@3m (dBuV/m) | Margin (dB) | Remark | Table Deg. | Ant High (m) |
|-----------------|-------------|----------------------|-----------------------|--------------------|-------------------|-------------|--------|------------|--------------|
| 1591.5 | H | 55.88 | -4.34 | 51.54 | 74 | -22.46 | Peak | 199 | 1.5 |
| 1600.0 | V | 59.63 | -4.88 | 54.76 | 74 | -19.24 | Peak | 200 | 1.5 |
| 1600.0 | V | 55.68 | -4.83 | 50.85 | 54 | -3.15 | Ave | 195 | 1.5 |
| 1903.5 | V | 52.51 | -3.16 | 49.35 | 74 | -24.65 | Peak | 168 | 1.5 |
| 4926.0 | V | 51.08 | 6.80 | 57.88 | 74 | -16.12 | Peak | 188 | 1.5 |
| 4926.0 | V | 34.56 | 6.82 | 41.38 | 54 | -12.62 | Ave | 192 | 1.5 |
| 7375.8 | V | 50.87 | 10.50 | 61.36 | 74 | -12.64 | Peak | 184 | 1.5 |
| 7375.8 | V | 35.04 | 10.48 | 45.52 | 54 | -8.48 | Ave | 180 | 1.5 |

4.3.3. Photographs of Radiated Emission Test

FRONT VIEW



REAR VIEW

