

# FCC TEST REPORT

**REPORT NO.:** RF950208L03  
**MODEL NO.:** WRK54G v3  
**RECEIVED:** Mar. 06, 2006  
**TESTED:** Mar. 17 ~ Mar. 22, 2006  
**ISSUED:** Mar. 24, 2006

**APPLICANT:** Cisco-Linksys LLC  
**ADDRESS:** 121 Theory Drive Irvine, CA 92617 (USA)

**ISSUED BY:** Advance Data Technology Corporation  
**LAB ADDRESS:** 47 14<sup>th</sup> Lin, Chiapau Tsun, Linko, Taipei,  
Taiwan, R.O.C.  
**TEST LOCATION:** No. 19, Hwa Ya 2<sup>nd</sup> Rd., Kueishan, Taoyuan,  
Taiwan, R.O.C.

This test report consists of 86 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



## Table of Contents

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS.....	5
2.1	MEASUREMENT UNCERTAINTY.....	5
3	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF EUT.....	6
3.2	DESCRIPTION OF TEST MODES.....	8
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST.....	8
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	9
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	11
3.4	DESCRIPTION OF SUPPORT UNITS.....	11
4	TEST TYPES AND RESULTS.....	12
4.1	CONDUCTED EMISSION MEASUREMENT.....	12
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	12
4.1.2	TEST INSTRUMENTS.....	12
4.1.3	TEST PROCEDURES.....	13
4.1.4	DEVIATION FROM TEST STANDARD.....	13
4.1.5	TEST SETUP.....	14
4.1.6	EUT OPERATING CONDITIONS.....	14
4.1.7	TEST RESULTS.....	15
4.2	RADIATED EMISSION MEASUREMENT.....	33
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	33
4.2.2	TEST INSTRUMENTS.....	34
4.2.3	TEST PROCEDURES.....	35
4.2.4	DEVIATION FROM TEST STANDARD.....	35
4.2.5	TEST SETUP.....	36
4.2.6	EUT OPERATING CONDITIONS.....	36
4.2.7	TEST RESULTS.....	37
4.3	6dB BANDWIDTH MEASUREMENT.....	50
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT.....	50
4.3.2	TEST INSTRUMENTS.....	50
4.3.3	TEST PROCEDURE.....	51
4.3.4	DEVIATION FROM TEST STANDARD.....	51
4.3.5	TEST SETUP.....	51
4.3.6	EUT OPERATING CONDITIONS.....	51
4.3.7	TEST RESULTS.....	52
4.4	MAXIMUM PEAK OUTPUT POWER.....	58
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT.....	58
4.4.2	TEST INSTRUMENTS.....	58
4.4.3	TEST PROCEDURES.....	59
4.4.4	DEVIATION FROM TEST STANDARD.....	59
4.4.5	TEST SETUP.....	59
4.4.6	EUT OPERATING CONDITIONS.....	59



4.4.7	TEST RESULTS .....	60
4.5	POWER SPECTRAL DENSITY MEASUREMENT.....	61
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	61
4.5.2	TEST INSTRUMENTS.....	61
4.5.3	TEST PROCEDURE.....	62
4.5.4	DEVIATION FROM TEST STANDARD .....	62
4.5.5	TEST SETUP .....	62
4.5.6	EUT OPERATING CONDITIONS .....	62
4.5.7	TEST RESULTS .....	63
4.6	BAND EDGES MEASUREMENT.....	69
4.6.1	LIMITS OF BAND EDGES MEASUREMENT .....	69
4.6.2	TEST INSTRUMENTS.....	69
4.6.3	TEST PROCEDURE.....	69
4.6.4	DEVIATION FROM TEST STANDARD .....	69
4.6.5	EUT OPERATING CONDITION .....	69
4.6.6	TEST RESULTS .....	70
4.7	ANTENNA REQUIREMENT .....	78
4.7.1	STANDARD APPLICABLE.....	78
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	78
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	79
6	INFORMATION ON THE TESTING LABORATORIES .....	85
	APPENDIX-A .....	A-1



# 1 CERTIFICATION

**PRODUCT :** Wireless-G Broadband Router with 4-Port Switch  
**MODEL NO.:** WRK54G v3  
**BRAND:** Linksys  
**APPLICANT :** Cisco-Linksys LLC  
**TESTED:** Mar. 17 ~ Mar. 22, 2006  
**TEST SAMPLE:** ENGINEERING SAMPLE  
**STANDARDS :** FCC Part 15, Subpart C (Section 15.247),  
ANSI C63.4-2003

The above equipment have been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :** Rebecca Huang , **DATE:** Mar. 24, 2006  
Rebecca Huang

**TECHNICAL ACCEPTANCE :** Long Chen , **DATE:** Mar. 24, 2006  
Responsible for RF Long Chen

**APPROVED BY :** Gary Chang , **DATE:** Mar. 24, 2006  
Gary Chang / Supervisor

## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

<b>APPLIED STANDARD: FCC Part 15, Subpart C</b>			
<b>Standard Section</b>	<b>Test Type and Limit</b>	<b>Result</b>	<b>REMARK</b>
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -6.28dB at 0.278MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit : min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.33dB at 2390.00MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

<b>MEASUREMENT</b>	<b>FREQUENCY</b>	<b>UNCERTAINTY</b>
Conducted emissions	9kHz~30MHz	2.44 dB
	30MHz ~ 200MHz	3.55 dB
Radiated emissions	200MHz ~1000MHz	3.58 dB
	1GHz ~ 18GHz	1.10 dB
	18GHz ~ 40GHz	0.91 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Wireless-G Broadband Router with 4-Port Switch
<b>MODEL NO.</b>	WRK54G v3
<b>FCC ID</b>	Q87-WRK54GV3
<b>POWER SUPPLY</b>	12Vdc from AC adapter
<b>MODULATION TYPE</b>	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
<b>MODULATION TECHNOLOGY</b>	DSSS, OFDM
<b>TRANSFER RATE</b>	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps
<b>FREQUENCY RANGE</b>	2412MHz ~ 2462MHz
<b>NUMBER OF CHANNEL</b>	11
<b>MAXIMUM OUTPUT POWER</b>	51.050mW
<b>ANTENNA TYPE</b>	Dipole antenna with 3.3dBi gain (Printed antenna Receive only)
<b>DATA CABLE</b>	NA
<b>I/O PORTS</b>	RJ45

**NOTE:**

1. The EUT is powered by the following adapters.

<b>Brand</b>	LINKSYS
<b>Model</b>	AM-12500
<b>Input Power</b>	120Vac, 60Hz, 12W
<b>Output Power</b>	12Vdc, 500mA
<b>Power Cord</b>	1.8 m non-shielded without core

<b>Brand</b>	LINKSYS
<b>Model</b>	D12-50-A
<b>Input Power</b>	120Vac, 60Hz, 100mA
<b>Output Power</b>	12Vdc, 500mA
<b>Power Cord</b>	1.8 m non-shielded without core

<b>Brand</b>	LINKSYS
<b>Model</b>	LS120V05A
<b>Input Power</b>	100-240Vac, 0.5A, 50-60Hz
<b>Output Power</b>	12Vdc, 0.5A Max
<b>Power Cord</b>	AC 0.5 m non-shielded without core DC 1.8 m non-shielded without core

2. The EUT complies with IEEE 802.11g standards and backwards compatible with IEEE 802.11b



products.


3. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
4. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

### 3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT for normal mode.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

#### 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

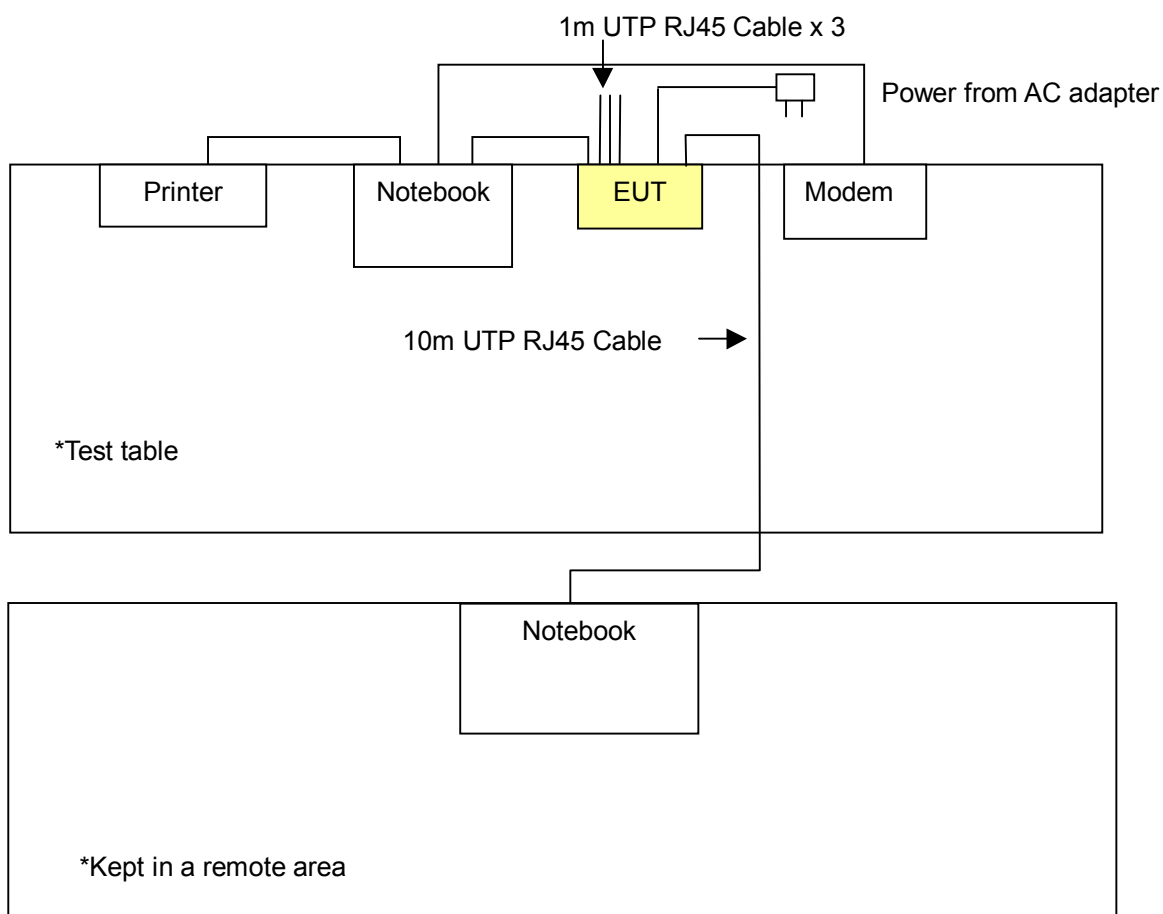



### 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
A	√	√	√	√	Adapter: AM-12500
B	√	√	-	-	Adapter: D12-50-A
C	√	√	-	-	Adapter: LS120V05A

Where PLC: Power Line Conducted Emission RE<1G RE: Radiated Emission below 1GHz  
 RE≥1G: Radiated Emission above 1GHz APCM: Antenna Port Conducted Measurement

NOTE”\_”: Mean no effect

#### **Power Line Conducted Emission Test:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
B	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
C	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

#### **Radiated Emission Test (Below 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11g	1 to 11	11	OFDM	BPSK	6
B	802.11g	1 to 11	11	OFDM	BPSK	6
C	802.11g	1 to 11	11	OFDM	BPSK	6

**Radiated Emission Test (Above 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

**Bandedge Measurement:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 11	OFDM	BPSK	6

**Antenna Port Conducted Measurement:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product, according to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C. (15.247)**  
**ANSI C63.4-2003**

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	12130898320	E2K24CLNS
2	PRINTER	EPSON	LQ-300+	DCGY047265	FCC DoC Approved
3	MODEM	ACEEX	1414V/3	0401008248	IFAXDM1414
4	NOTEBOOK COMPUTER	DELL	PP05L	20838027664	E2K24CLNS

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m shielded cable.
3	1.2m shielded cable.
4	NA

**NOTE:**

1. All power cords of the above support units are non shielded (1.8m).
2. Item 4 act as a communication partner to transfer data.

## 4 TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Nov. 02, 2006
RF signal cable Woken	5D-FB	Cable-HYCO3-01	Jan. 06, 2007
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Jan. 09, 2007
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Jan. 22, 2007
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Shielded Room 3.
  3. The VCCI Site Registration No. is C-2047.


#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under Limit - 20dB was not recorded.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

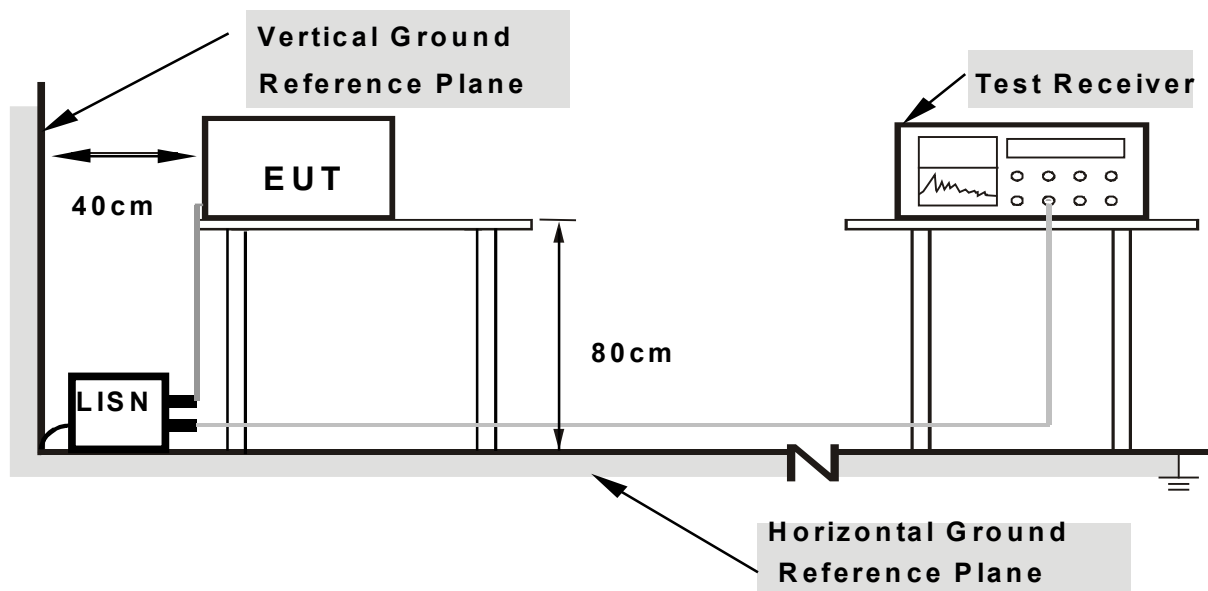

- Note: 1.Support units were connected to second LISN.**  
**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.6 EUT OPERATING CONDITIONS

- Connected the EUT to notebook placed on the testing table.
- Prepared another notebook system to act as a communication partner and placed it outside of testing area.
- The communication partners ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency via an RJ 45 cable.
- The notebook system sent "H" messages to its screen.
- The notebook system sent "H" messages to modem.
- The notebook system sent "H" messages to printer and the printer printed them on paper.
- Steps c ~ f were repeated.


#### 4.1.7 TEST RESULTS

##### CONDUCTED WORST-CASE DATA

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TESTED BY	Morgan Chen	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.10	45.64	-	45.74	-	64.79	54.79	-19.05	-
2	0.232	0.10	43.47	-	43.57	-	62.38	52.38	-18.81	-
3	0.259	0.10	41.98	-	42.08	-	61.45	51.45	-19.37	-
4	0.380	0.10	38.89	-	38.99	-	58.27	48.27	-19.28	-
5	0.716	0.10	33.63	-	33.73	-	56.00	46.00	-22.27	-
6	23.129	0.79	29.47	-	30.26	-	60.00	50.00	-29.74	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

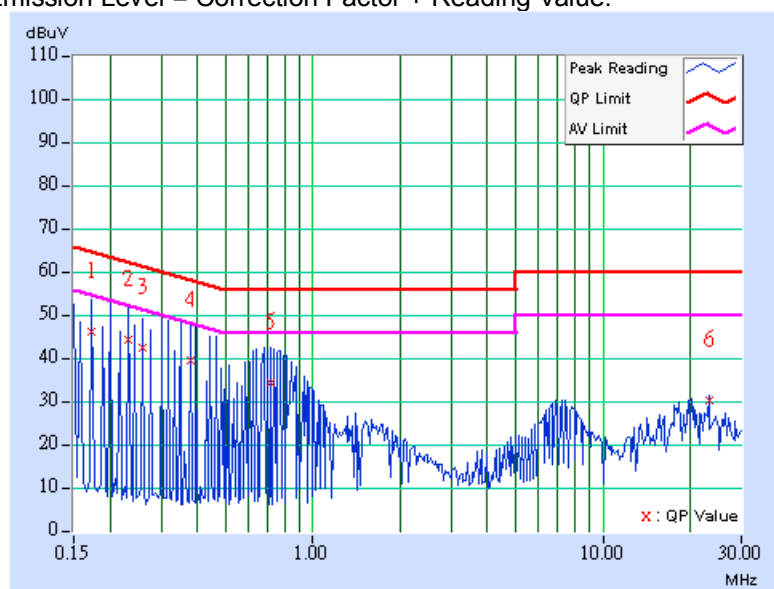

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TESTED BY	Morgan Chen	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.10	46.89	-	46.99	-	65.58	55.58	-18.59	-
2	0.181	0.10	46.62	-	46.72	-	64.43	54.43	-17.71	-
3	0.209	0.10	46.11	-	46.21	-	63.26	53.26	-17.05	-
4	0.236	0.10	45.14	-	45.24	-	62.24	52.24	-17.00	-
5	0.486	0.11	43.78	-	43.89	-	56.24	46.24	-12.34	-
6	23.129	0.73	32.22	-	32.95	-	60.00	50.00	-27.05	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

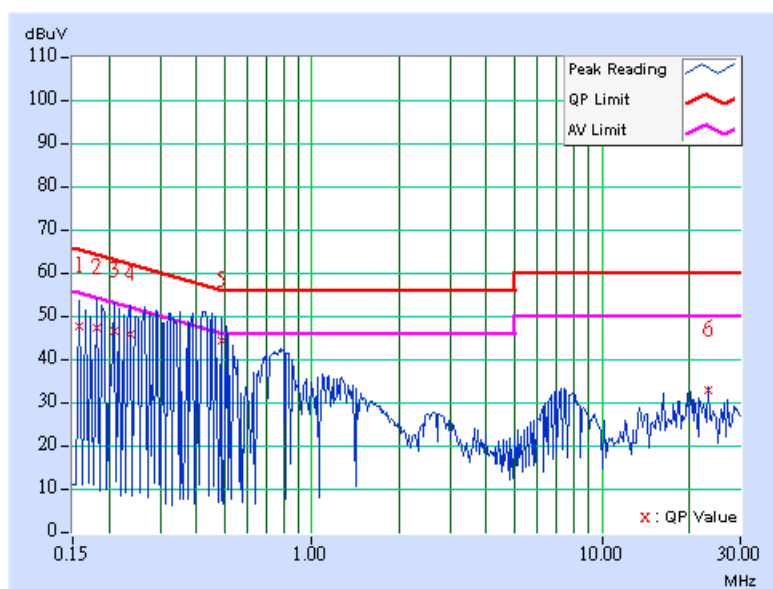




EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TESTED BY	Morgan Chen	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.166	0.10	45.92	-	46.02	-	65.18	55.18	-19.16	-
2	0.224	0.10	44.34	-	44.44	-	62.66	52.66	-18.22	-
3	0.341	0.10	40.13	-	40.23	-	59.17	49.17	-18.94	-
4	0.787	0.10	26.63	-	26.73	-	56.00	46.00	-29.27	-
5	7.406	0.36	28.14	-	28.50	-	60.00	50.00	-31.50	-
6	17.695	0.59	28.16	-	28.75	-	60.00	50.00	-31.25	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

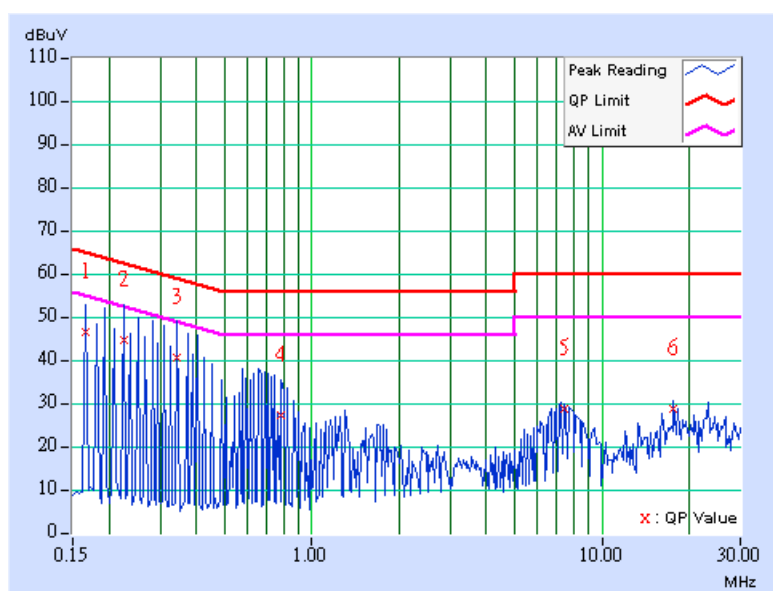

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TESTED BY	Morgan Chen	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.166	0.10	46.66	-	46.76	-	65.18	55.18	-18.42
2	0.170	0.10	47.14	-	47.24	-	64.98	54.98	-17.74	-
3	0.224	0.10	45.78	-	45.88	-	62.66	52.66	-16.78	-
4	0.287	0.10	44.46	-	44.56	-	60.62	50.62	-16.06	-
5	0.408	0.10	43.99	-	44.09	-	57.69	47.69	-13.60	-
6	21.664	0.65	29.88	-	30.53	-	60.00	50.00	-29.47	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

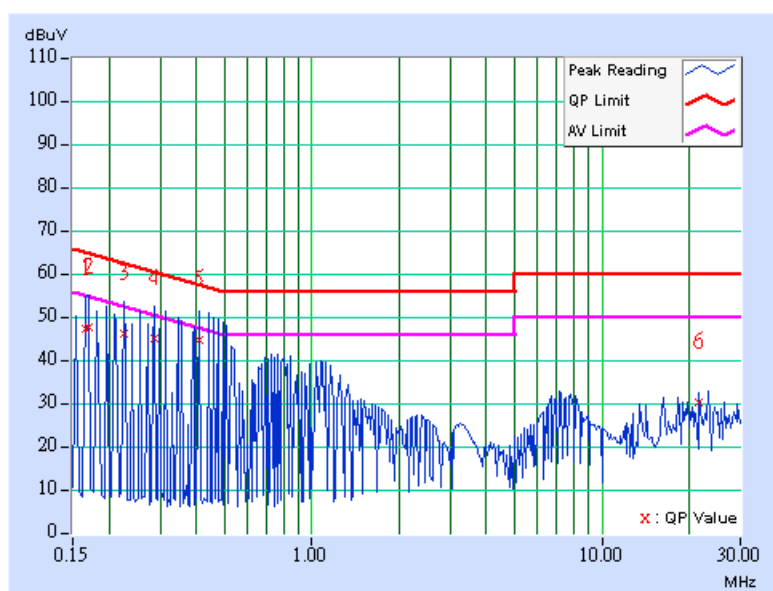

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TESTED BY	Morgan Chen	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.10	46.21	-	46.31	-	65.79	55.79	-19.48	-
2	0.240	0.10	43.68	-	43.78	-	62.10	52.10	-18.32	-
3	0.310	0.10	40.06	-	40.16	-	59.97	49.97	-19.81	-
4	0.369	0.10	38.78	-	38.88	-	58.53	48.53	-19.65	-
5	0.650	0.10	30.98	-	31.08	-	56.00	46.00	-24.92	-
6	18.242	0.58	29.95	-	30.53	-	60.00	50.00	-29.47	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

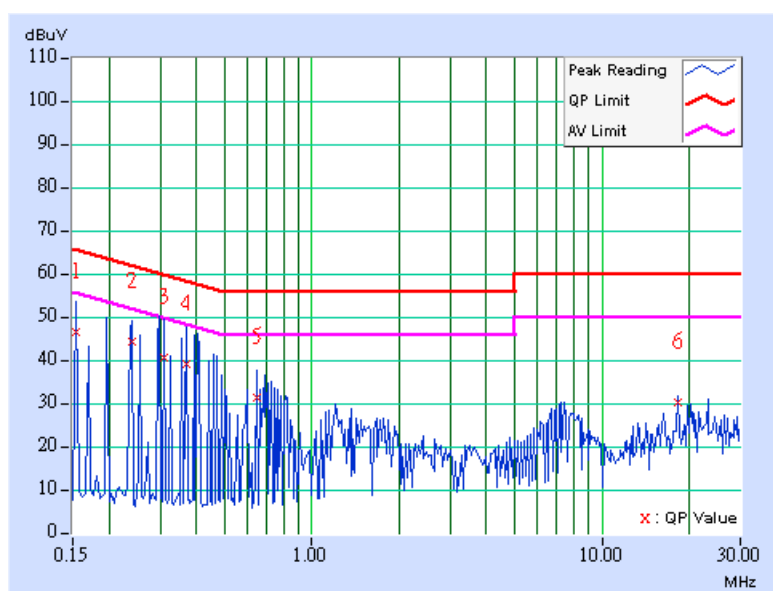

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TESTED BY	Morgan Chen	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.10	46.95	-	47.05	-	64.61	54.61	-17.56	-
2	0.263	0.10	45.78	-	45.88	-	61.33	51.33	-15.45	-
3	0.279	0.10	45.62	-	45.72	-	60.85	50.85	-15.13	-
4	0.322	0.10	44.20	-	44.30	-	59.66	49.66	-15.36	-
5	0.384	0.10	43.98	-	44.08	-	58.18	48.18	-14.10	-
6	0.420	0.10	44.02	-	44.12	-	57.46	47.46	-13.33	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

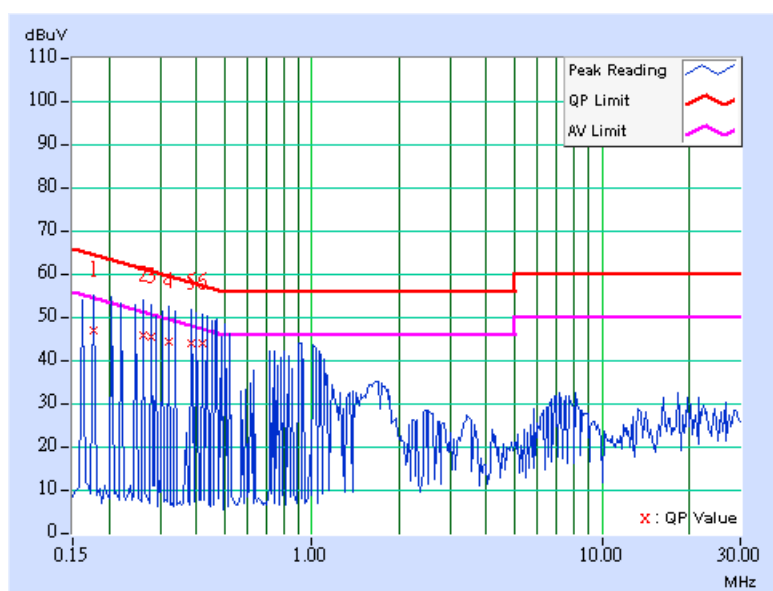

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.478	0.10	39.83	-	39.93	-	56.37	46.37	-16.44	-
2	0.998	0.10	23.74	-	23.84	-	56.00	46.00	-32.16	-
3	1.227	0.12	23.99	-	24.11	-	56.00	46.00	-31.89	-
4	1.363	0.14	24.67	-	24.81	-	56.00	46.00	-31.19	-
5	6.855	0.37	31.80	-	32.17	-	60.00	50.00	-27.83	-
6	20.258	0.58	28.86	-	29.44	-	60.00	50.00	-30.56	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

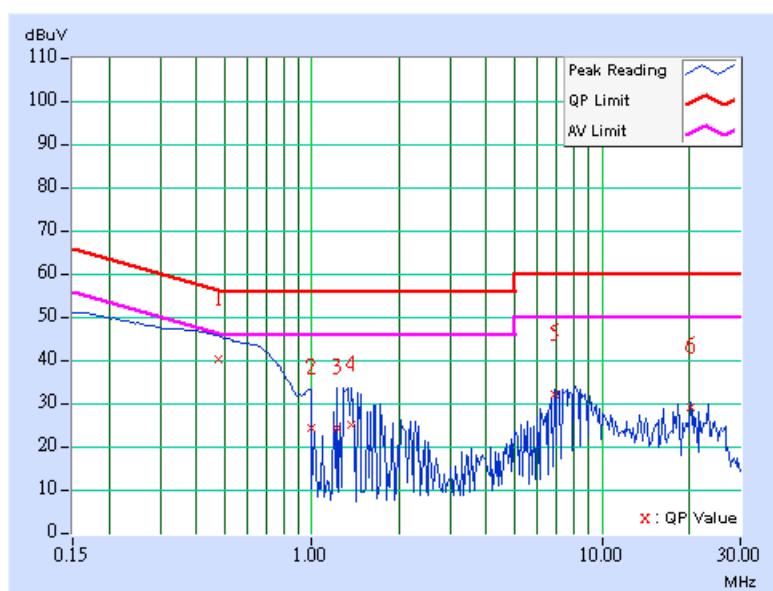

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.349	0.10	33.83	-	33.93	-	58.98	48.98	-25.05	-
2	0.900	0.18	17.62	-	17.80	-	56.00	46.00	-38.20	-
3	1.230	0.20	22.57	-	22.77	-	56.00	46.00	-33.23	-
4	1.438	0.20	19.68	-	19.88	-	56.00	46.00	-36.12	-
5	7.279	0.42	32.76	-	33.18	-	60.00	50.00	-26.82	-
6	19.711	0.56	26.23	-	26.79	-	60.00	50.00	-33.21	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

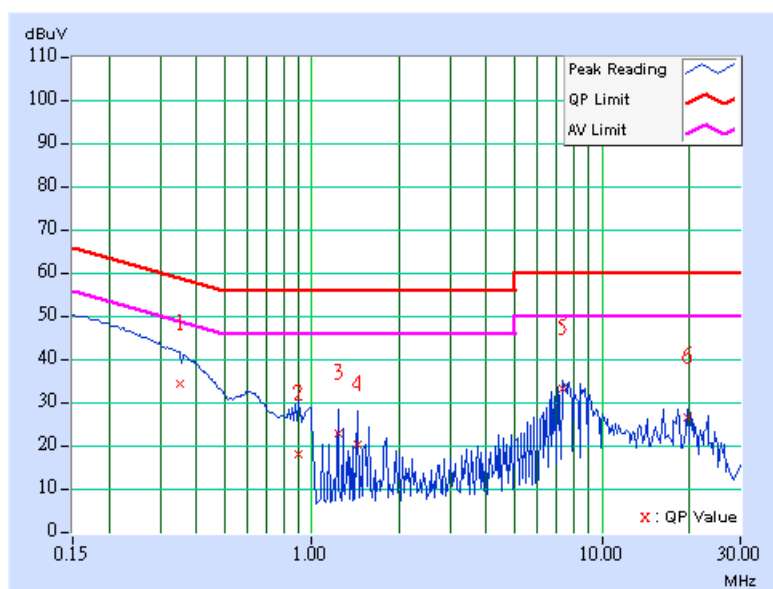

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.470	0.10	38.57	-	38.67	-	56.51	46.51	-17.84	-
2	0.873	0.10	25.37	-	25.47	-	56.00	46.00	-30.53	-
3	1.109	0.11	23.94	-	24.05	-	56.00	46.00	-31.95	-
4	1.566	0.16	22.32	-	22.48	-	56.00	46.00	-33.52	-
5	7.277	0.36	33.68	-	34.04	-	60.00	50.00	-25.96	-
6	18.305	0.58	27.04	-	27.62	-	60.00	50.00	-32.38	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

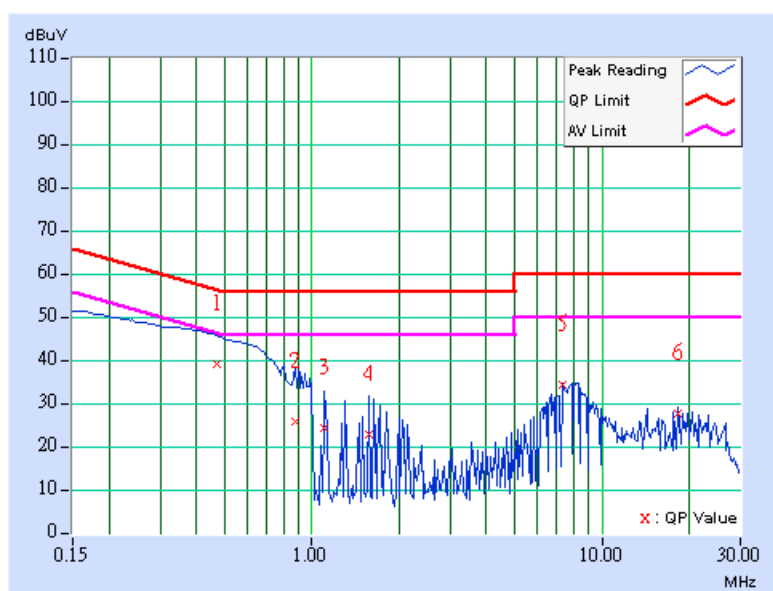

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.326	0.10	34.62	-	34.72	-	59.56	49.56	-24.84	-
2	0.982	0.20	19.72	-	19.92	-	56.00	46.00	-36.08	-
3	1.570	0.20	17.41	-	17.61	-	56.00	46.00	-38.39	-
4	6.855	0.41	31.48	-	31.89	-	60.00	50.00	-28.11	-
5	7.859	0.43	27.65	-	28.08	-	60.00	50.00	-31.92	-
6	19.707	0.56	26.80	-	27.36	-	60.00	50.00	-32.64	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

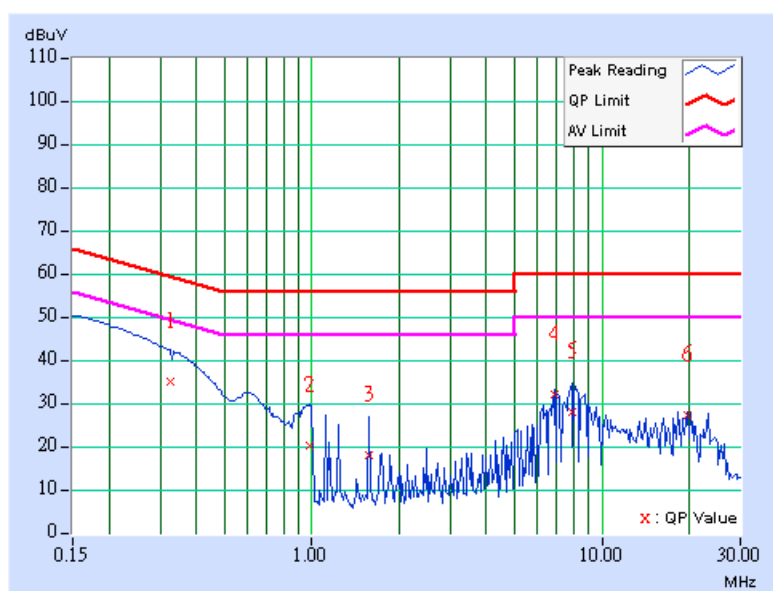




EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.408	0.10	39.34	-	39.44	-	57.69	47.69	-18.25	-
2	0.931	0.10	25.03	-	25.13	-	56.00	46.00	-30.87	-
3	1.137	0.11	23.82	-	23.93	-	56.00	46.00	-32.07	-
4	1.594	0.16	22.79	-	22.95	-	56.00	46.00	-33.05	-
5	7.434	0.36	19.05	-	19.41	-	60.00	50.00	-40.59	-
6	19.707	0.56	28.17	-	28.73	-	60.00	50.00	-31.27	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

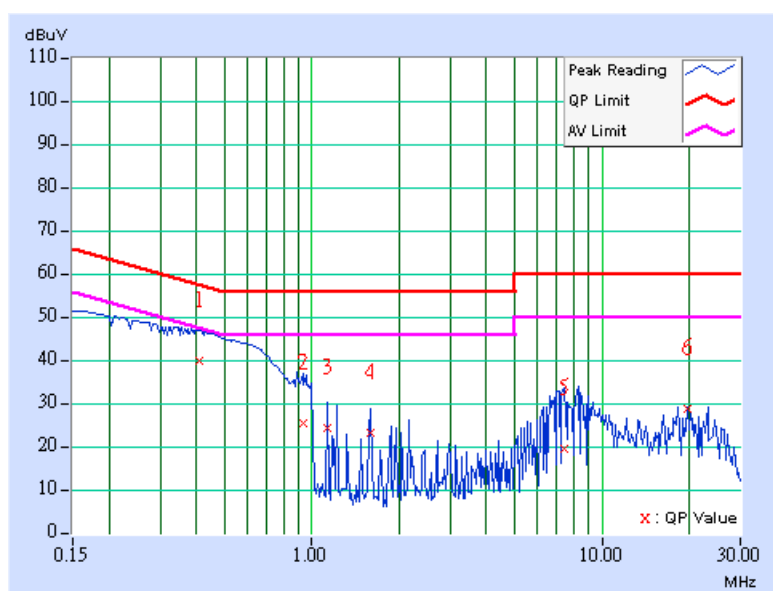

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.365	0.10	32.89	-	32.99	-	58.62	48.62	-25.63	-
2	0.986	0.20	19.88	-	20.08	-	56.00	46.00	-35.92	-
3	1.707	0.20	16.38	-	16.58	-	56.00	46.00	-39.42	-
4	1.836	0.20	15.43	-	15.63	-	56.00	46.00	-40.37	-
5	8.141	0.43	32.56	-	32.99	-	60.00	50.00	-27.01	-
6	18.242	0.58	27.78	-	28.36	-	60.00	50.00	-31.64	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

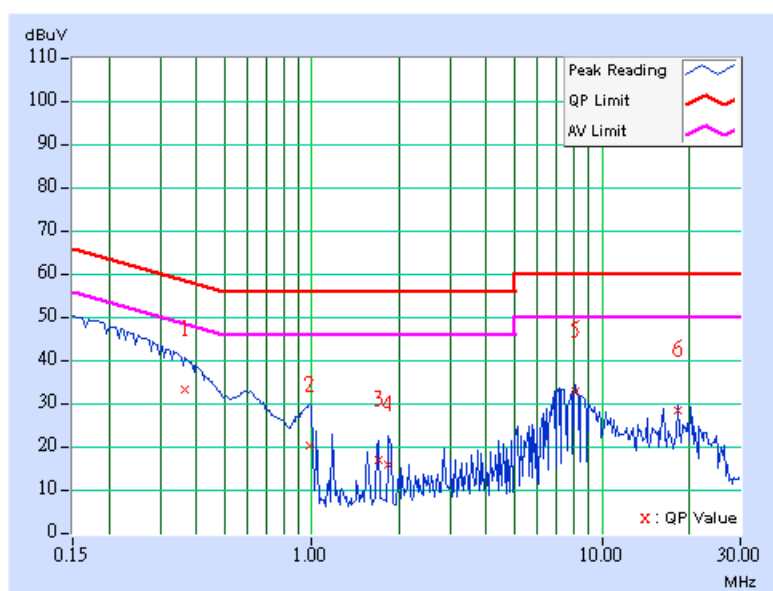

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.279	0.10	49.87	-	49.97	-	60.85	50.85	-10.88	-
2	0.568	0.10	37.88	-	37.98	-	56.00	46.00	-18.02	-
3	0.826	0.10	42.80	-	42.90	-	56.00	46.00	-13.10	-
4	1.109	0.11	40.71	-	40.82	-	56.00	46.00	-15.18	-
5	1.664	0.17	42.78	-	42.95	-	56.00	46.00	-13.05	-
6	3.066	0.29	41.14	-	41.43	-	56.00	46.00	-14.57	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

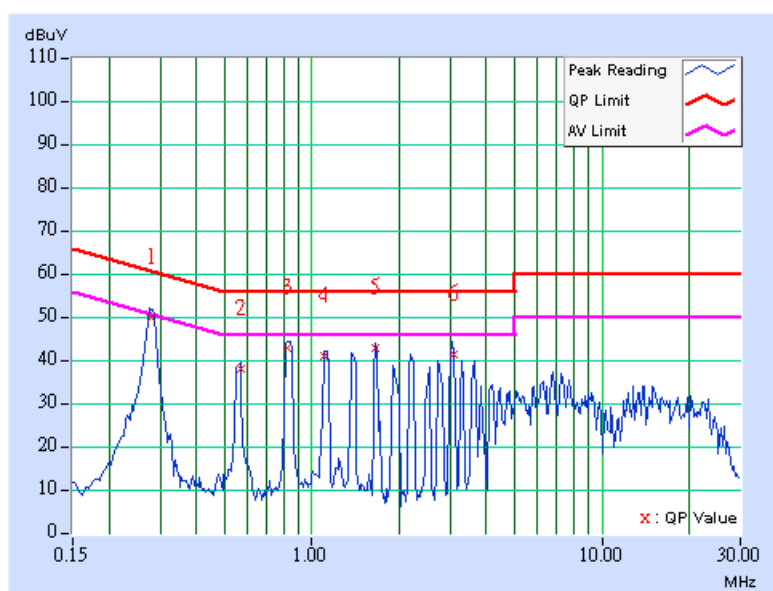

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.278	0.10	51.33	44.49	51.43	44.59	60.87	50.87	-9.44	-6.28
2	0.568	0.13	38.19	-	38.32	-	56.00	46.00	-17.68	-
3	0.830	0.17	43.12	-	43.29	-	56.00	46.00	-12.71	-
4	1.133	0.20	40.73	-	40.93	-	56.00	46.00	-15.07	-
5	1.660	0.20	41.17	-	41.37	-	56.00	46.00	-14.63	-
6	3.047	0.29	39.61	-	39.90	-	56.00	46.00	-16.10	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

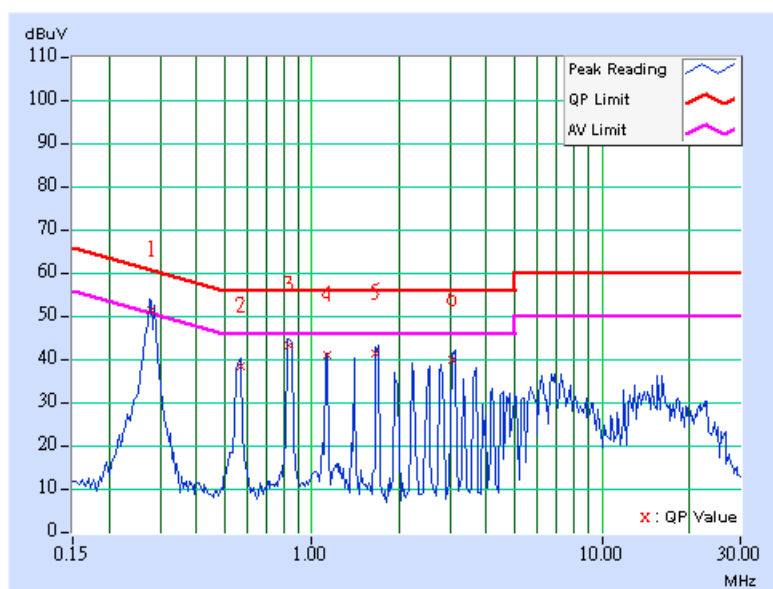

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.275	0.10	49.45	-	49.55	-	60.97	50.97	-11.42	-
2	0.568	0.10	37.33	-	37.43	-	56.00	46.00	-18.57	-
3	0.826	0.10	42.90	-	43.00	-	56.00	46.00	-13.00	-
4	1.109	0.11	40.85	-	40.96	-	56.00	46.00	-15.04	-
5	1.652	0.17	42.50	-	42.67	-	56.00	46.00	-13.33	-
6	3.027	0.29	40.08	-	40.37	-	56.00	46.00	-15.63	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

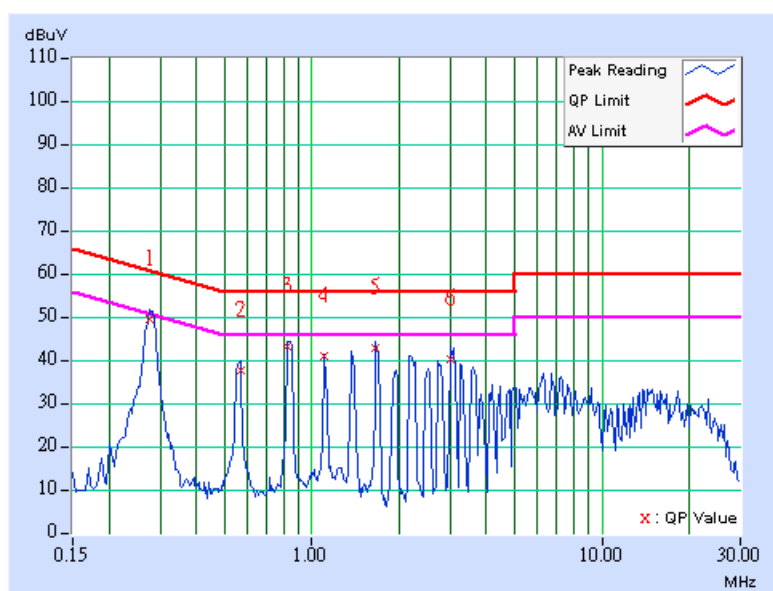

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.279	0.10	50.52	-	50.62	-	60.84	50.84	-10.22	-
2	0.564	0.13	37.04	-	37.17	-	56.00	46.00	-18.83	-
3	0.834	0.17	43.60	-	43.77	-	56.00	46.00	-12.23	-
4	1.117	0.20	40.97	-	41.17	-	56.00	46.00	-14.83	-
5	1.680	0.20	42.10	-	42.30	-	56.00	46.00	-13.70	-
6	3.082	0.29	40.82	-	41.11	-	56.00	46.00	-14.89	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

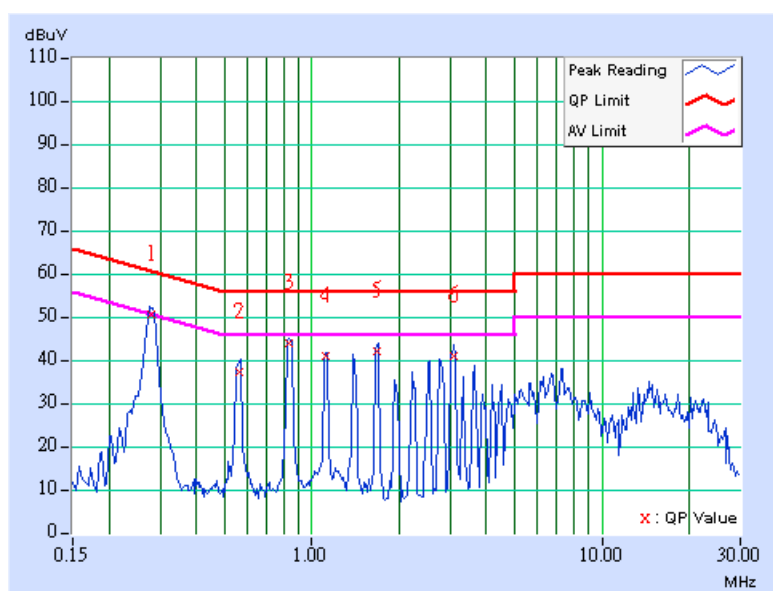

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.275	0.10	47.34	-	47.44	-	60.97	50.97	-13.53	-
2	0.834	0.10	43.14	-	43.24	-	56.00	46.00	-12.76	-
3	1.129	0.11	41.25	-	41.36	-	56.00	46.00	-14.64	-
4	1.664	0.17	43.02	-	43.19	-	56.00	46.00	-12.81	-
5	3.059	0.29	41.32	-	41.61	-	56.00	46.00	-14.39	-
6	3.613	0.34	36.93	-	37.27	-	56.00	46.00	-18.73	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

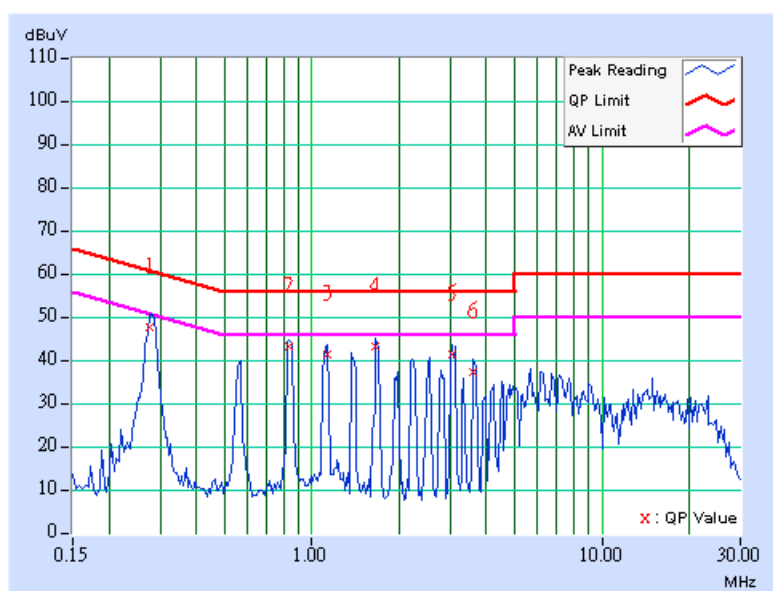

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
TESTED BY	Lori Chiu	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.279	0.10	50.09	-	50.19	-	60.85	50.85	-10.66	-
2	0.568	0.13	38.21	-	38.34	-	56.00	46.00	-17.66	-
3	0.834	0.17	43.44	-	43.61	-	56.00	46.00	-12.39	-
4	1.117	0.20	41.05	-	41.25	-	56.00	46.00	-14.75	-
5	1.684	0.20	41.98	-	42.18	-	56.00	46.00	-13.82	-
6	3.098	0.29	38.83	-	39.12	-	56.00	46.00	-16.88	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

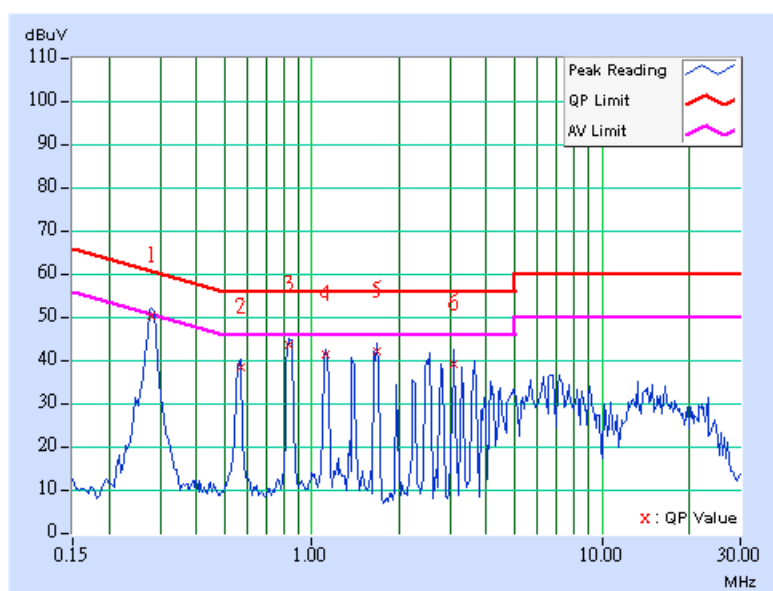



## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



#### 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	100033	May. 19, 2006
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100025	Dec. 05, 2006
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Jun. 01, 2006
HORN Antenna SCHWARZBECK	9120D	9120D-408	Jan. 08, 2007
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Jan. 19, 2007
Preamplifier Agilent	8447D	2944A10633	Nov. 04, 2006
Preamplifier Agilent	8449B	3008A01964	Oct. 30, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	214377/4	Dec. 13, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219272/4	Dec. 13, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA
Turn Table ADT.	TT100.	TT93021703	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Chamber 2.
  3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  4. The VCCI Site Registration No. is R-237.
  5. The IC Site Registration No. is IC4924-3.

### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.2.5 TEST SETUP

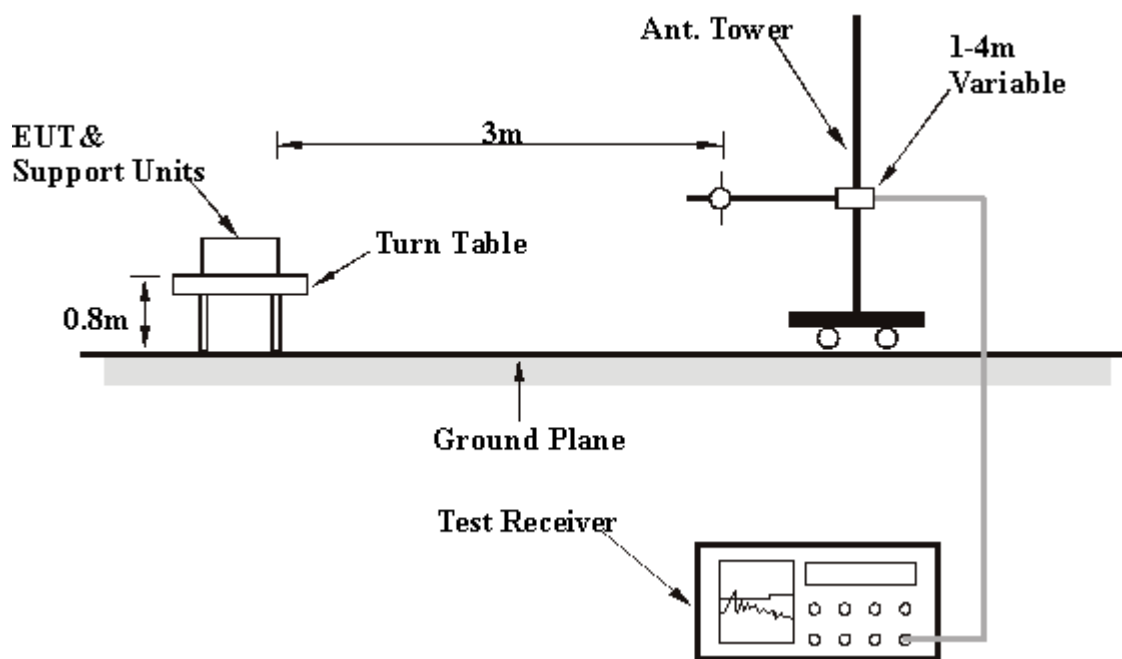

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

## 4.2.7 TEST RESULTS

### RADIATED WORST-CASE DATA: BELOW 1GHz

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Quasi-Peak
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TESTED BY	Jay Hsu	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A		

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	183.57	35.93 QP	43.50	-7.57	1.25 H	136	23.95	11.98
2	239.94	36.30 QP	46.00	-9.70	1.00 H	94	23.93	12.37
3	325.47	32.89 QP	46.00	-13.11	1.00 H	220	16.60	16.29
4	374.07	37.22 QP	46.00	-8.78	1.00 H	34	19.76	17.46
5	424.61	39.97 QP	46.00	-6.03	1.25 H	184	21.24	18.73
6	500.42	32.89 QP	46.00	-13.11	1.00 H	70	12.41	20.48
7	624.83	30.18 QP	46.00	-15.82	1.50 H	211	6.83	23.35

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	183.57	36.77 QP	43.50	-6.73	1.25 V	157	24.79	11.98
2	239.94	37.06 QP	46.00	-8.94	1.00 V	88	24.70	12.37
3	300.20	33.13 QP	46.00	-12.87	1.25 V	181	17.24	15.89
4	374.07	39.17 QP	46.00	-6.83	1.25 V	85	21.71	17.46
5	424.61	40.27 QP	46.00	-5.73	1.25 V	97	21.54	18.73
6	500.42	36.90 QP	46.00	-9.10	1.50 V	43	16.42	20.48

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
<b>CHANNEL</b>	Channel 11	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>MODULATION TYPE</b>	BPSK	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>TRANSFER RATE</b>	6Mbps	<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 65%RH, 991hPa
<b>TESTED BY</b>	Jay Hsu	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>TEST MODE</b>	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	183.57	39.88 QP	43.50	-3.62	1.50 H	67	27.91	11.98
2	249.66	36.28 QP	46.00	-9.72	1.25 H	58	23.62	12.66
3	325.47	33.25 QP	46.00	-12.75	1.00 H	223	16.96	16.29
4	374.07	37.19 QP	46.00	-8.81	1.00 H	217	19.73	17.46
5	424.61	39.76 QP	46.00	-6.24	1.00 H	229	21.03	18.73
6	500.42	37.19 QP	46.00	-8.81	1.50 H	190	16.71	20.48
7	624.83	32.95 QP	46.00	-13.05	1.25 H	184	9.60	23.35

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	80.54	34.43 QP	40.00	-5.57	1.25 V	67	24.07	10.36
2	183.57	33.36 QP	43.50	-10.14	2.00 V	16	21.38	11.98
3	249.66	36.58 QP	46.00	-9.42	1.00 V	118	23.92	12.66
4	374.07	38.03 QP	46.00	-7.97	1.25 V	154	20.57	17.46
5	424.61	41.89 QP	46.00	-4.11	1.25 V	127	23.16	18.73
6	500.42	35.92 QP	46.00	-10.08	1.25 V	175	15.44	20.48
7	599.56	32.40 QP	46.00	-13.60	1.25 V	250	9.26	23.13

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
<b>CHANNEL</b>	Channel 11	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>MODULATION TYPE</b>	BPSK	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>TRANSFER RATE</b>	6Mbps	<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 65%RH, 991hPa
<b>TESTED BY</b>	Jay Hsu	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>TEST MODE</b>	C		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	183.57	35.23 QP	43.50	-8.27	1.25 H	55	23.26	11.98
2	239.94	34.24 QP	46.00	-11.76	1.25 H	61	21.87	12.37
3	249.66	36.72 QP	46.00	-9.28	1.25 H	43	24.06	12.66
4	325.47	32.26 QP	46.00	-13.74	1.00 H	229	15.96	16.29
5	374.07	38.02 QP	46.00	-7.98	1.00 H	220	20.56	17.46
6	424.61	39.98 QP	46.00	-6.02	1.00 H	49	21.24	18.73
7	500.42	36.79 QP	46.00	-9.21	1.25 H	187	16.31	20.48

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	173.85	29.81 QP	43.50	-13.69	1.25 V	115	17.15	12.66
2	239.94	34.24 QP	46.00	-11.76	1.25 V	61	21.87	12.37
3	325.47	32.26 QP	46.00	-13.74	1.00 V	229	15.96	16.29
4	399.34	29.67 QP	46.00	-16.33	1.00 V	229	11.39	18.28
5	525.69	26.02 QP	46.00	-19.98	1.25 V	184	5.10	20.93
6	599.56	26.99 QP	46.00	-19.01	1.00 V	247	3.85	23.13
7	751.18	32.04 QP	46.00	-13.96	1.25 V	328	5.74	26.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

### 802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	1Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TESTED BY	Jay Hsu	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.29 PK	74.00	-19.71	1.00 H	184	22.38	31.91
1	2390.00	45.11 AV	54.00	-8.89	1.00 H	184	13.20	31.91
2	*2412.00	98.02 PK			1.00 H	184	65.98	32.04
2	*2412.00	94.53 AV			1.00 H	184	62.49	32.04
3	3216.00	43.29 PK	78.02	-34.73	1.00 H	23	9.75	33.55
3	3216.00	30.80 AV	74.53	-43.73	1.00 H	23	-2.74	33.55
4	4824.00	51.30 PK	74.00	-22.70	1.00 H	186	13.79	37.51
4	4824.00	46.28 AV	54.00	-7.72	1.00 H	186	8.77	37.51
5	7261.00	52.39 PK	74.00	-21.61	1.00 H	341	8.42	43.97
5	7261.00	38.70 AV	54.00	-15.30	1.00 H	341	-5.27	43.97
6	9698.00	56.07 PK	78.02	-21.95	1.00 H	228	8.15	47.92
6	9698.00	43.84 AV	74.53	-30.69	1.00 H	228	-4.08	47.92

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “ : Fundamental frequency.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	1Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TESTED BY	Jay Hsu	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	40.43 PK	74.00	-33.57	1.26 V	20	11.29	29.14
1	1608.00	30.01 AV	54.00	-23.99	1.26 V	20	0.87	29.14
2	2390.00	57.79 PK	74.00	-16.21	1.00 V	175	25.88	31.91
2	2390.00	50.25 AV	54.00	-3.75	1.00 V	175	18.34	31.91
3	*2412.00	113.22 PK			1.00 V	189	81.18	32.04
3	*2412.00	109.93 AV			1.00 V	189	77.89	32.04
4	3216.00	46.96 PK	93.22	-46.26	1.44 V	176	13.42	33.55
4	3216.00	40.20 AV	89.93	-49.73	1.44 V	176	6.66	33.55
5	4824.00	51.67 PK	74.00	-22.33	1.29 V	207	14.16	37.51
5	4824.00	47.06 AV	54.00	-6.94	1.29 V	207	9.55	37.51
6	7236.00	52.36 PK	74.00	-21.64	1.00 V	250	8.43	43.92
6	7236.00	39.22 AV	54.00	-14.78	1.00 V	250	-4.71	43.92
7	9648.00	57.17 PK	93.22	-36.05	1.29 V	277	9.41	47.76
7	9648.00	43.84 AV	89.93	-46.09	1.29 V	277	-3.92	47.76

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “ : Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	1Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TESTED BY	Jay Hsu	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	98.25 PK			1.19 H	182	66.05	32.20
1	*2437.00	94.89 AV			1.19 H	182	62.69	32.20
2	4874.00	48.77 PK	74.00	-25.23	1.05 H	198	11.22	37.55
2	4874.00	41.02 AV	54.00	-12.98	1.05 H	198	3.47	37.55

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	113.89 PK			1.01 V	190	81.69	32.20
1	*2437.00	110.21 AV			1.01 V	190	78.01	32.20
2	4874.00	46.68 PK	74.00	-27.32	1.00 V	113	9.13	37.55
2	4874.00	37.93 AV	54.00	-16.07	1.00 V	113	0.38	37.55

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “ : Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
<b>CHANNEL</b>	Channel 11	<b>FREQUENCY RANGE</b>	1 ~ 25GHz
<b>MODULATION TYPE</b>	DBPSK	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>TRANSFER RATE</b>	1Mbps	<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 65%RH, 991hPa
<b>TESTED BY</b>	Jay Hsu	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>TEST MODE</b>	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	98.87 PK			1.20 H	182	66.52	32.35
1	*2462.00	95.40 AV			1.20 H	182	63.05	32.35
2	2483.50	55.05 PK	74.00	-18.95	1.21 H	182	22.56	32.49
2	2483.50	45.34 AV	54.00	-8.66	1.21 H	182	12.85	32.49
3	3282.00	42.49 PK	78.87	-36.38	1.00 H	133	8.75	33.74
3	3282.00	30.28 AV	75.40	-45.12	1.00 H	133	-3.46	33.74
4	4924.00	49.76 PK	74.00	-24.24	1.21 H	168	12.18	37.58
4	4924.00	44.80 AV	54.00	-9.20	1.21 H	168	7.22	37.58
5	7386.00	52.33 PK	74.00	-21.67	1.00 H	276	8.35	43.98
5	7386.00	39.11 AV	54.00	-14.89	1.00 H	276	-4.87	43.98
6	9848.00	56.00 PK	78.87	-22.87	1.21 H	24	7.77	48.23
6	9848.00	43.59 AV	75.40	-31.81	1.21 H	24	-4.64	48.23

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “ : Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	1Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TESTED BY	Jay Hsu	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.77 PK			1.00 V	193	80.42	32.35
1	*2462.00	109.30 AV			1.00 V	193	76.95	32.35
2	2483.50	57.81 PK	74.00	-16.19	1.00 V	192	25.32	32.49
2	2483.50	49.47 AV	54.00	-4.53	1.00 V	192	16.98	32.49
3	3282.00	44.37 PK	92.77	-48.40	1.46 V	206	10.63	33.74
3	3282.00	34.70 AV	89.30	-54.60	1.46 V	206	0.96	33.74
4	4924.00	51.02 PK	74.00	-22.98	1.16 V	213	13.44	37.58
4	4924.00	45.59 AV	54.00	-8.41	1.16 V	213	8.01	37.58
5	7386.00	51.80 PK	74.00	-22.20	1.00 V	220	7.82	43.98
5	7386.00	39.64 AV	54.00	-14.36	1.00 V	220	-4.34	43.98
6	9848.00	57.30 PK	92.77	-35.47	1.00 V	24	9.07	48.23
6	9848.00	44.50 AV	89.30	-44.80	1.00 V	24	-3.73	48.23

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “ : Fundamental frequency.

### 802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TESTED BY	Jay Hsu	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.21 PK	74.00	-19.79	1.00 H	179	22.30	31.91
1	2390.00	45.45 AV	54.00	-8.55	1.00 H	179	13.54	31.91
2	*2412.00	100.11 PK			1.00 H	183	68.07	32.04
2	*2412.00	88.89 AV			1.00 H	183	56.85	32.04
3	3216.00	42.86 PK	80.11	-37.25	1.00 H	50	9.32	33.55
3	3216.00	32.12 AV	68.89	-36.77	1.00 H	50	-1.42	33.55
4	4824.00	47.23 PK	74.00	-26.77	1.06 H	200	9.72	37.51
4	4824.00	37.78 AV	54.00	-16.22	1.06 H	200	0.27	37.51
5	7256.00	51.62 PK	74.00	-22.38	1.00 H	284	7.66	43.96
5	7256.00	38.87 AV	54.00	-15.13	1.00 H	284	-5.09	43.96
6	9668.00	55.96 PK	80.11	-24.15	1.00 H	330	8.14	47.82
6	9668.00	43.69 AV	68.89	-25.20	1.00 H	330	-4.13	47.82

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “ : Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TESTED BY	Jay Hsu	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.38 PK	74.00	-10.62	1.01 V	180	31.47	31.91
<b>1</b>	<b>2390.00</b>	<b>52.67 AV</b>	<b>54.00</b>	<b>-1.33</b>	<b>1.01 V</b>	<b>180</b>	<b>20.76</b>	<b>31.91</b>
2	*2412.00	112.46 PK			1.24 V	175	80.42	32.04
2	*2412.00	101.70 AV			1.24 V	175	69.66	32.04
3	3216.00	45.70 PK	92.46	-46.76	1.34 V	112	12.16	33.55
3	3216.00	37.47 AV	81.70	-44.23	1.34 V	112	3.93	33.55
4	4824.00	46.05 PK	74.00	-27.95	1.00 V	199	8.54	37.51
4	4824.00	34.19 AV	54.00	-19.81	1.00 V	199	-3.32	37.51
5	7236.00	52.24 PK	74.00	-21.76	1.00 V	238	8.31	43.92
5	7236.00	39.96 AV	54.00	-14.04	1.00 V	238	-3.97	43.92
6	9648.00	56.64 PK	92.46	-35.81	1.00 V	205	8.88	47.76
6	9648.00	43.75 AV	81.70	-37.95	1.00 V	205	-4.01	47.76

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* " : Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TESTED BY	Jay Hsu	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	98.99 PK			1.19 H	184	66.79	32.20
1	*2437.00	88.08 AV			1.19 H	184	55.88	32.20
2	4874.00	50.58 PK	74.00	-23.42	1.21 H	186	13.03	37.55
2	4874.00	38.41 AV	54.00	-15.59	1.21 H	186	0.86	37.55

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	113.40 PK			1.00 V	191	81.20	32.20
1	*2437.00	102.18 AV			1.00 V	191	69.98	32.20
2	4874.00	46.80 PK	74.00	-27.20	1.00 V	150	9.25	37.55
2	4874.00	34.09 AV	54.00	-19.91	1.00 V	150	-3.46	37.55

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “ : Fundamental frequency.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TESTED BY	Jay Hsu	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	99.38 PK			1.20 H	183	67.03	32.35
1	*2462.00	88.69 AV			1.20 H	183	56.34	32.35
2	2483.50	54.66 PK	74.00	-19.34	1.20 H	183	22.17	32.49
2	2483.50	46.52 AV	54.00	-7.48	1.20 H	183	14.03	32.49
3	4924.00	48.33 PK	74.00	-25.67	1.03 H	202	10.75	37.58
3	4924.00	38.20 AV	54.00	-15.80	1.03 H	202	0.62	37.58
4	7386.00	52.47 PK	74.00	-21.53	1.02 H	283	8.49	43.98
4	7386.00	39.22 AV	54.00	-14.78	1.02 H	283	-4.76	43.98
5	9848.00	56.47 PK	79.38	-22.91	1.00 H	228	8.24	48.23
5	9848.00	43.48 AV	68.69	-25.21	1.00 H	228	-4.75	48.23

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “ : Fundamental frequency.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TESTED BY	Jay Hsu	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1651.00	49.98 PK	92.42	-42.44	1.00 V	176	20.80	29.18
1	1651.00	35.89 AV	81.87	-45.98	1.00 V	176	6.71	29.18
2	*2462.00	112.42 PK			1.23 V	186	80.07	32.35
2	*2462.00	101.87 AV			1.23 V	186	69.52	32.35
3	2483.50	63.76 PK	74.00	-10.24	1.19 V	192	31.27	32.49
3	2483.50	52.63 AV	54.00	-1.37	1.19 V	192	20.14	32.49
4	3282.00	43.39 PK	92.42	-49.03	1.00 V	158	9.65	33.74
4	3282.00	34.72 AV	81.87	-47.15	1.00 V	158	0.98	33.74
5	4924.00	45.70 PK	74.00	-28.30	1.00 V	123	8.12	37.58
5	4924.00	33.86 AV	54.00	-20.14	1.00 V	123	-3.72	37.58
6	7386.00	51.52 PK	74.00	-22.48	1.00 V	283	7.54	43.98
6	7386.00	39.43 AV	54.00	-14.57	1.00 V	283	-4.55	43.98
7	9848.00	56.32 PK	92.42	-36.10	1.02 V	210	8.09	48.23
7	9848.00	43.89 AV	81.87	-37.98	1.02 V	210	-4.34	48.23

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “ : Fundamental frequency.



### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


#### 4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

#### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




### 4.3.7 TEST RESULTS

#### 802.11b DSSS MODULATION


<b>MODULATION TYPE</b>	DBPSK	<b>TRANSFER RATE</b>	1Mbps
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	26deg.C, 66%RH, 991hPa
<b>TESTED BY</b>	Long Chen		

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>6dB BANDWIDTH (MHz)</b>	<b>MINIMUM LIMIT (MHz)</b>	<b>PASS/FAIL</b>
1	2412	12.06	0.5	PASS
6	2437	12.10	0.5	PASS
11	2462	12.06	0.5	PASS


### CH1

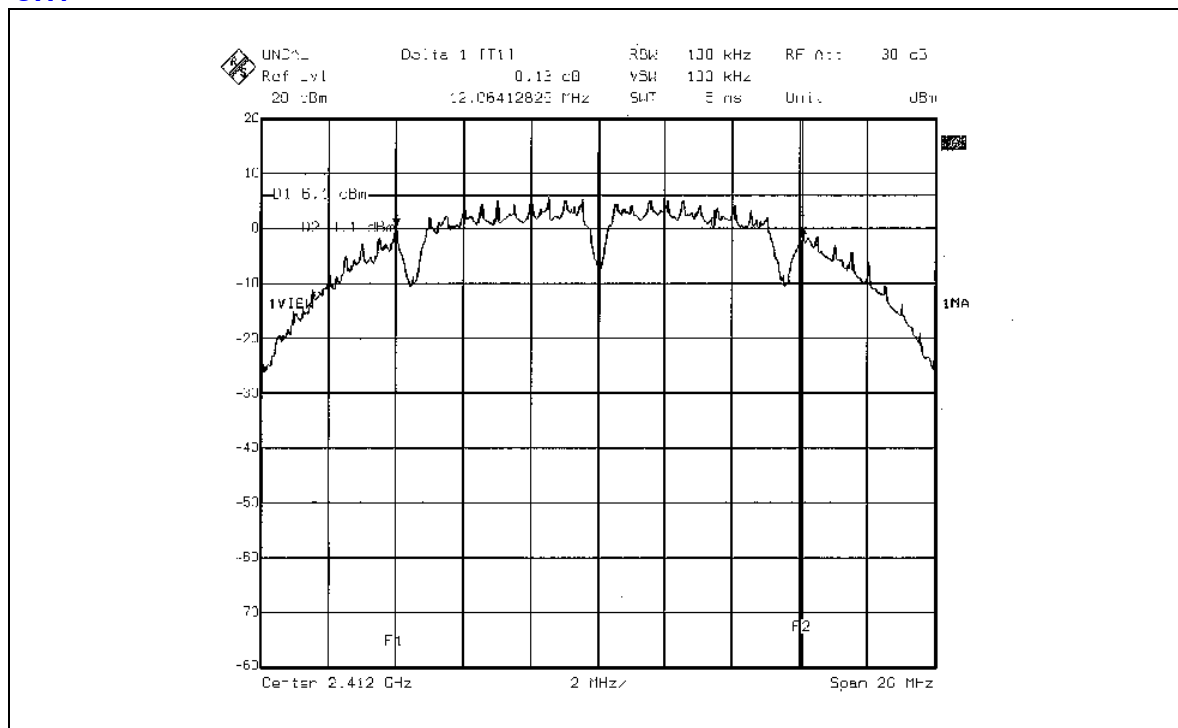

### CH6

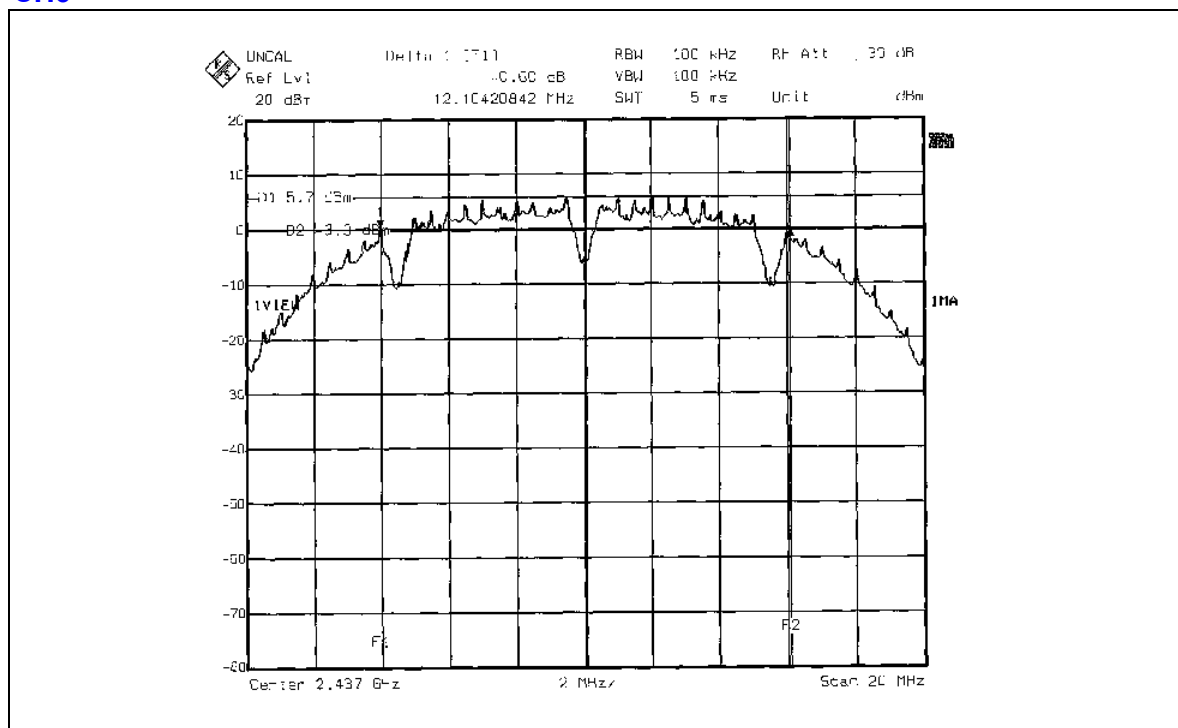

CH11

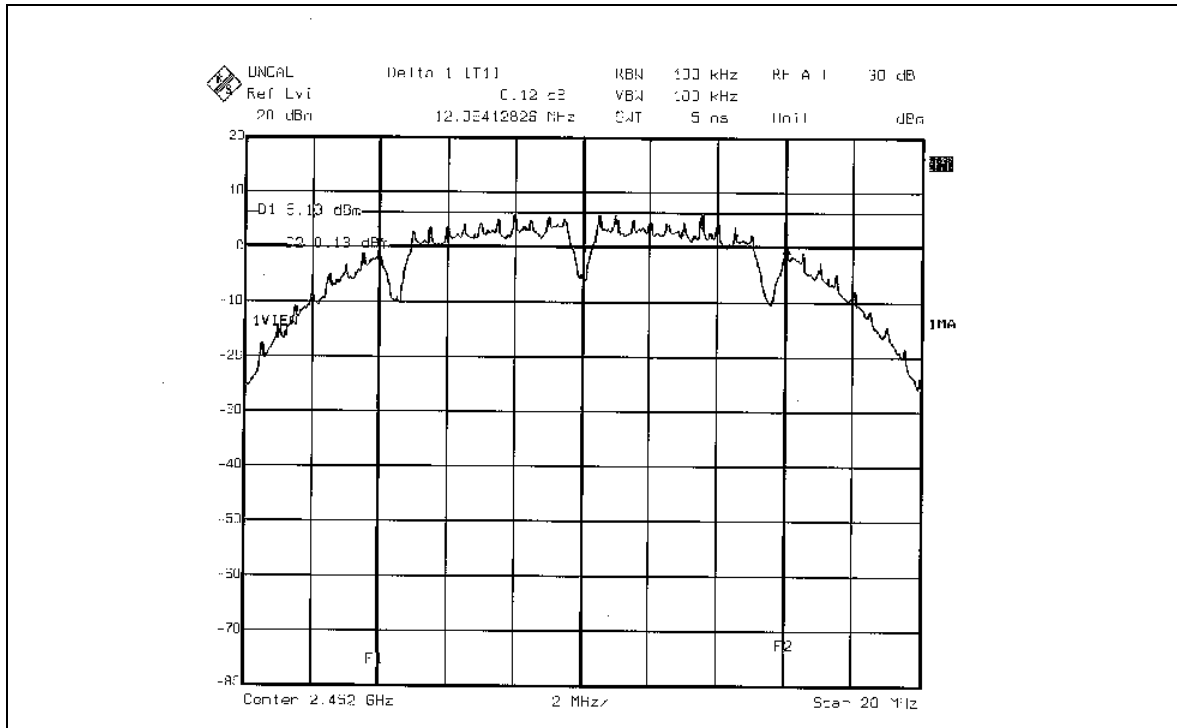




### 802.11g OFDM MODULATION


<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	6Mbps
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	26deg.C, 66%RH, 991hPa
<b>TESTED BY</b>	Long Chen		

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>6 dB BANDWIDTH (MHz)</b>	<b>MINIMUM LIMIT (MHz)</b>	<b>PASS/FAIL</b>
1	2412	16.27	0.5	PASS
6	2437	16.31	0.5	PASS
11	2462	16.31	0.5	PASS

### CH1

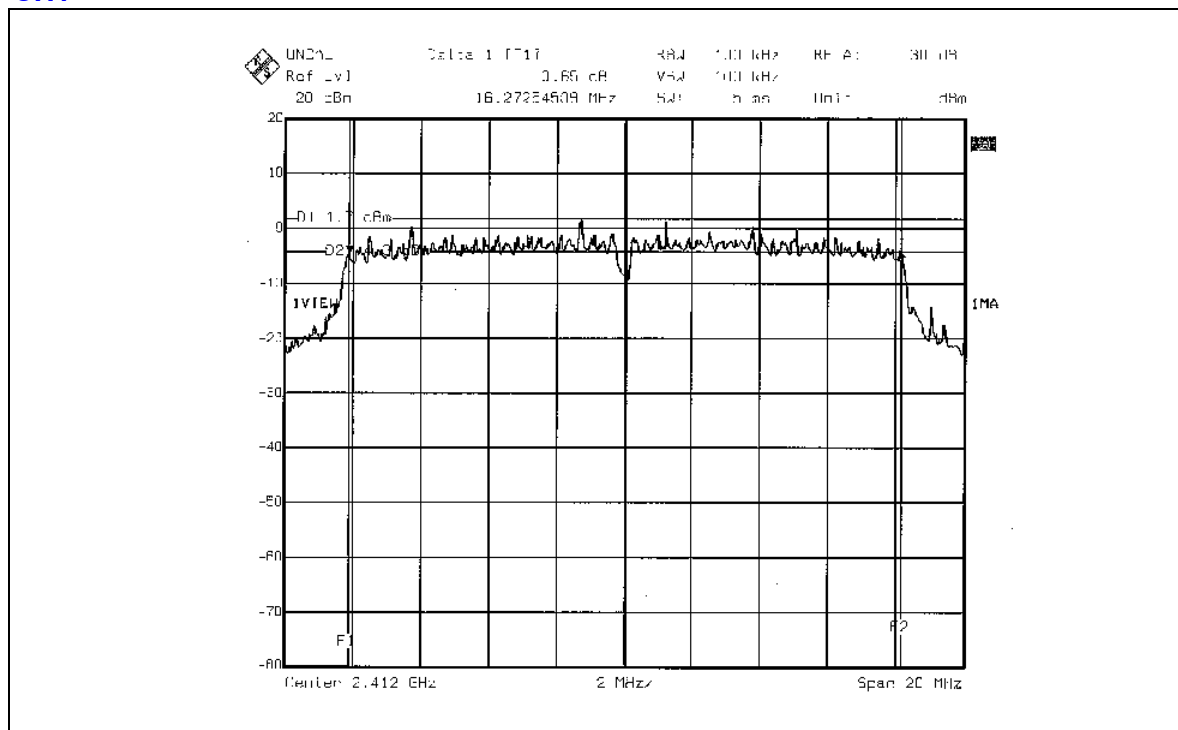


### CH6

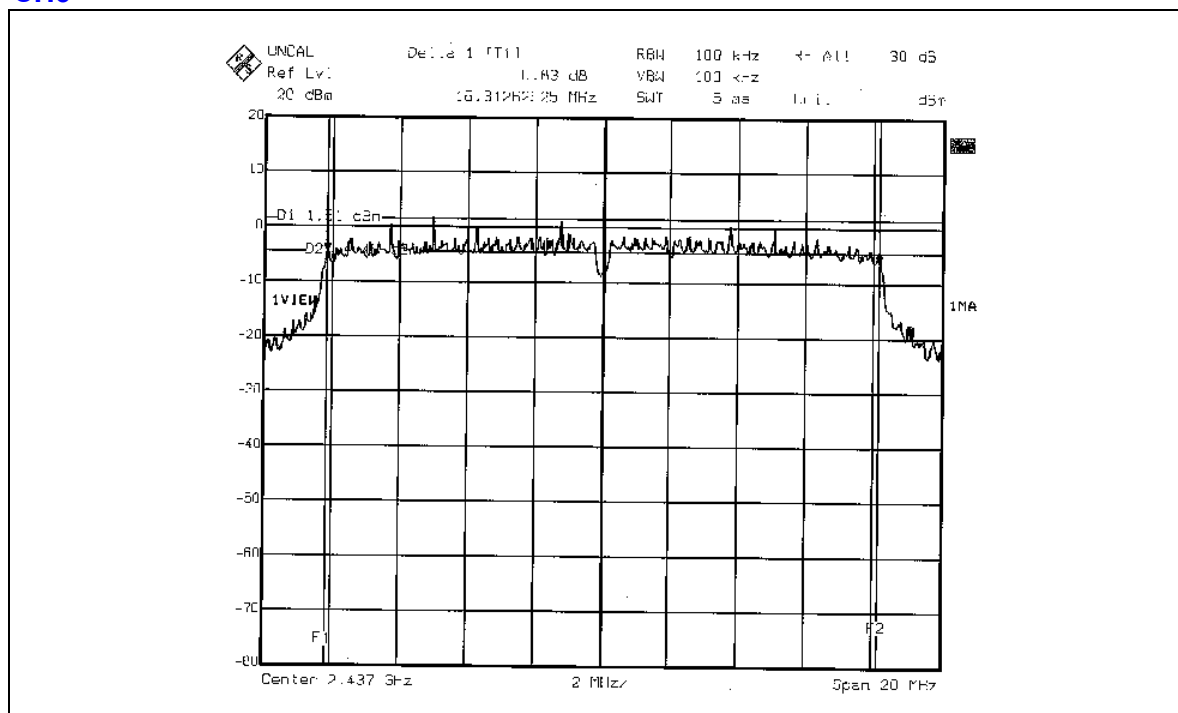



CH11

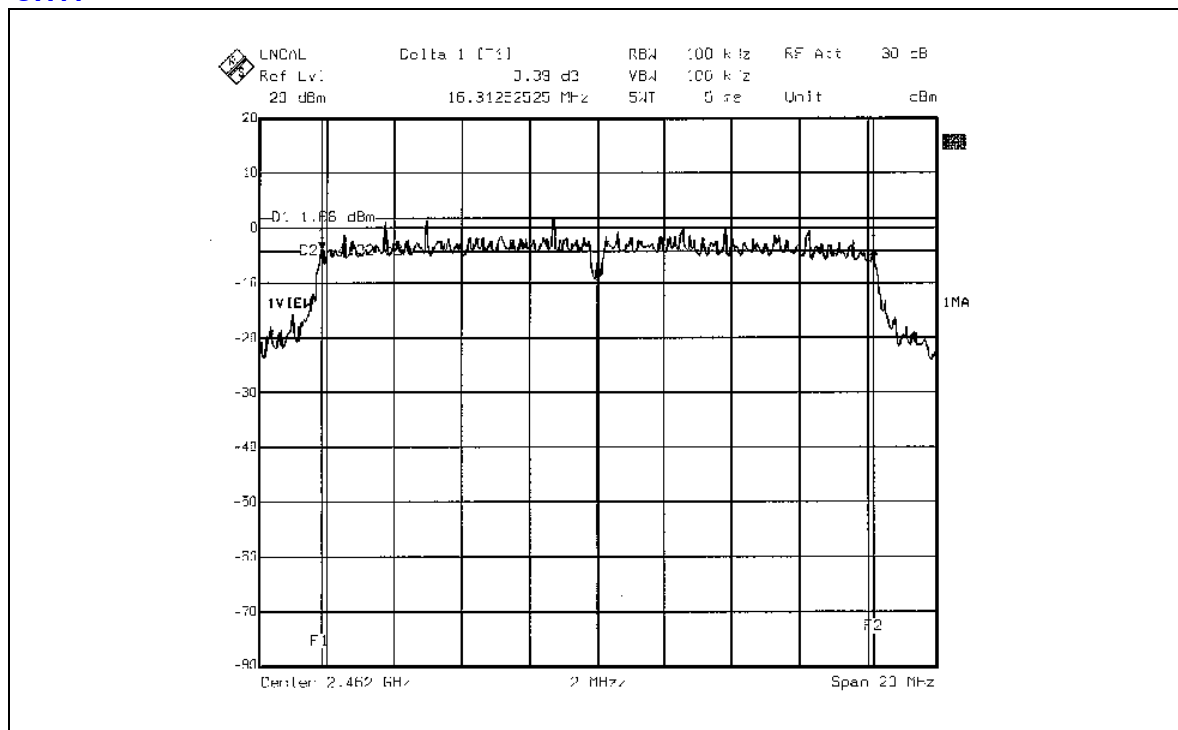



#### 4.4 MAXIMUM PEAK OUTPUT POWER

##### 4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm. .

##### 4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 07, 2006
DIGITAL RT OSCILLOSCOPE	TDS1012	C037299	Nov. 28, 2006
NARDA DETECTOR	4503A	FSCM99899	NA

**NOTE:**

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to peak the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

#### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.4.5 TEST SETUP



#### 4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



#### 4.4.7 TEST RESULTS

##### 802.11b DSSS MODULATION

<b>MODULATION TYPE</b>	DBPSK	<b>TRANSFER RATE</b>	1Mbps
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	26deg.C, 66%RH, 991hPa
<b>TESTED BY</b>	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	50.234	17.01	30	PASS
6	2437	51.050	17.08	30	PASS
11	2462	50.582	17.04	30	PASS

##### 802.11g OFDM MODULATION

<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	6Mbps
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	26deg.C, 66%RH, 991hPa
<b>TESTED BY</b>	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	25.119	14.00	30	PASS
6	2437	25.410	14.05	30	PASS
11	2462	25.235	14.02	30	PASS



## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


#### 4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

#### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.5.5 TEST SETUP



#### 4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6




#### 4.5.7 TEST RESULTS

##### 802.11b DSSS MODULATION


<b>MODULATION TYPE</b>	DBPSK	<b>TRANSFER RATE</b>	1Mbps
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	26deg.C, 66%RH, 991hPa
<b>TESTED BY</b>	Long Chen		

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz )</b>	<b>RF POWER LEVEL IN 3 kHz BW (dBm)</b>	<b>MAXIMUM LIMIT (dBm)</b>	<b>PASS/FAIL</b>
1	2412	-7.59	8	PASS
6	2437	-7.88	8	PASS
11	2462	-7.44	8	PASS

CH1

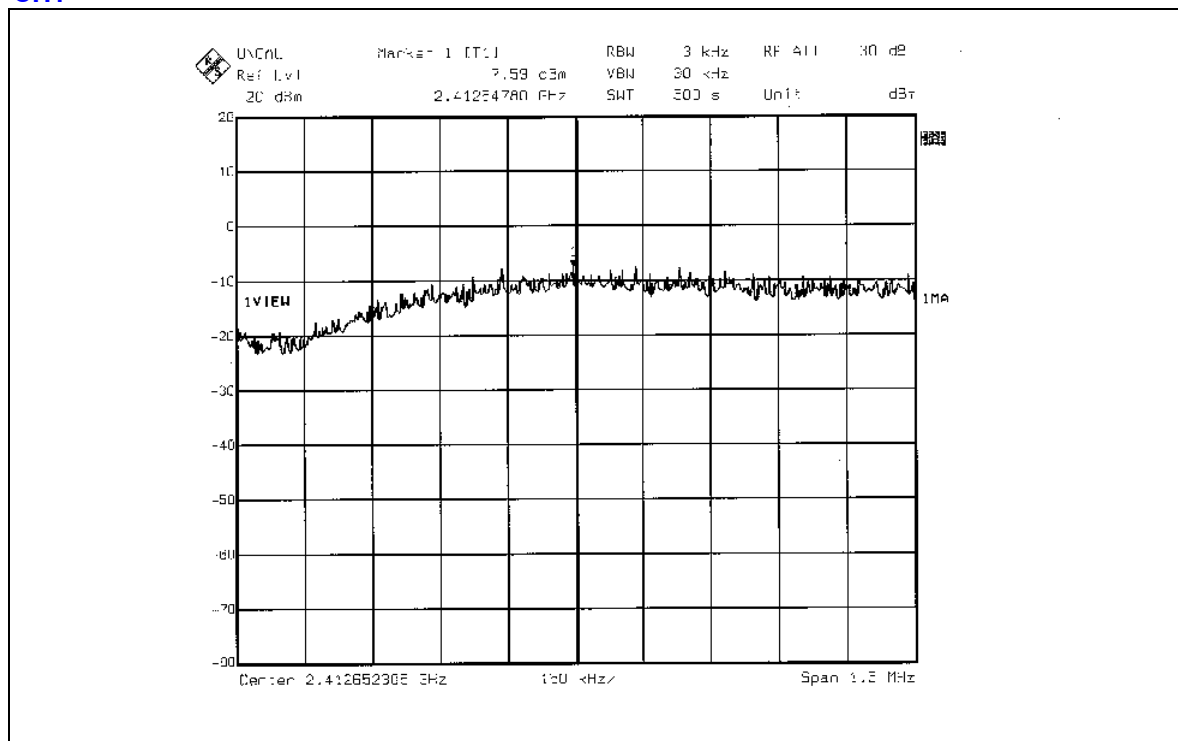


CH6

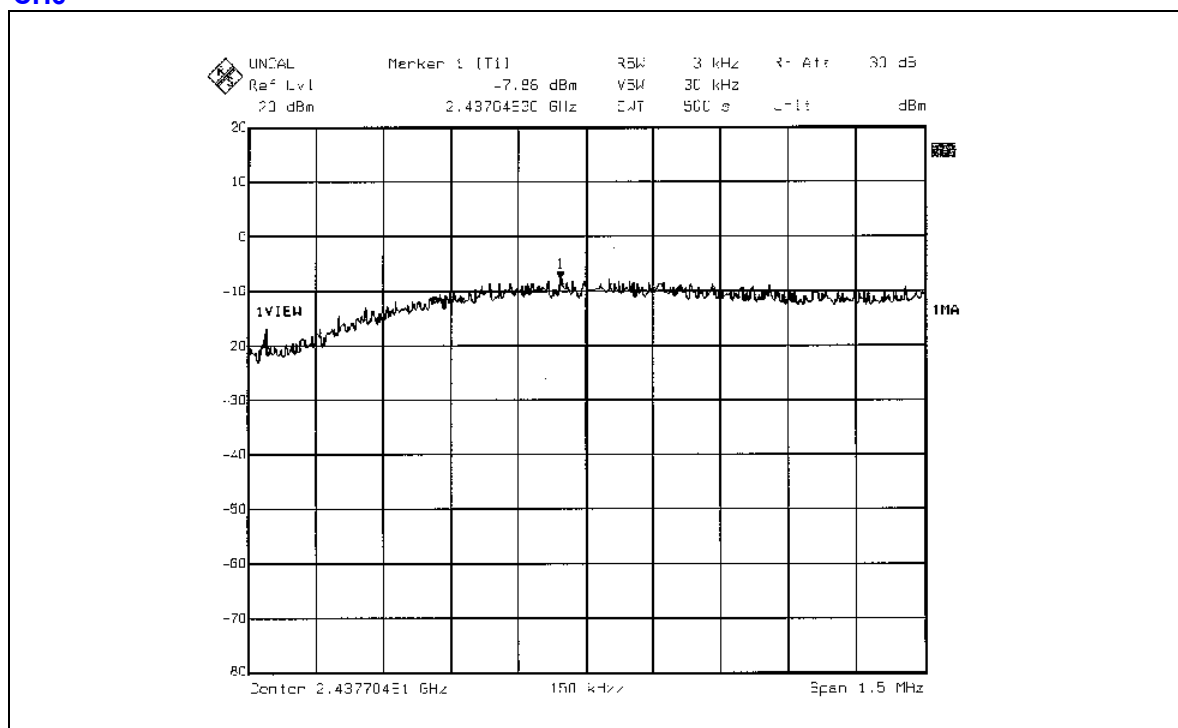



CH11

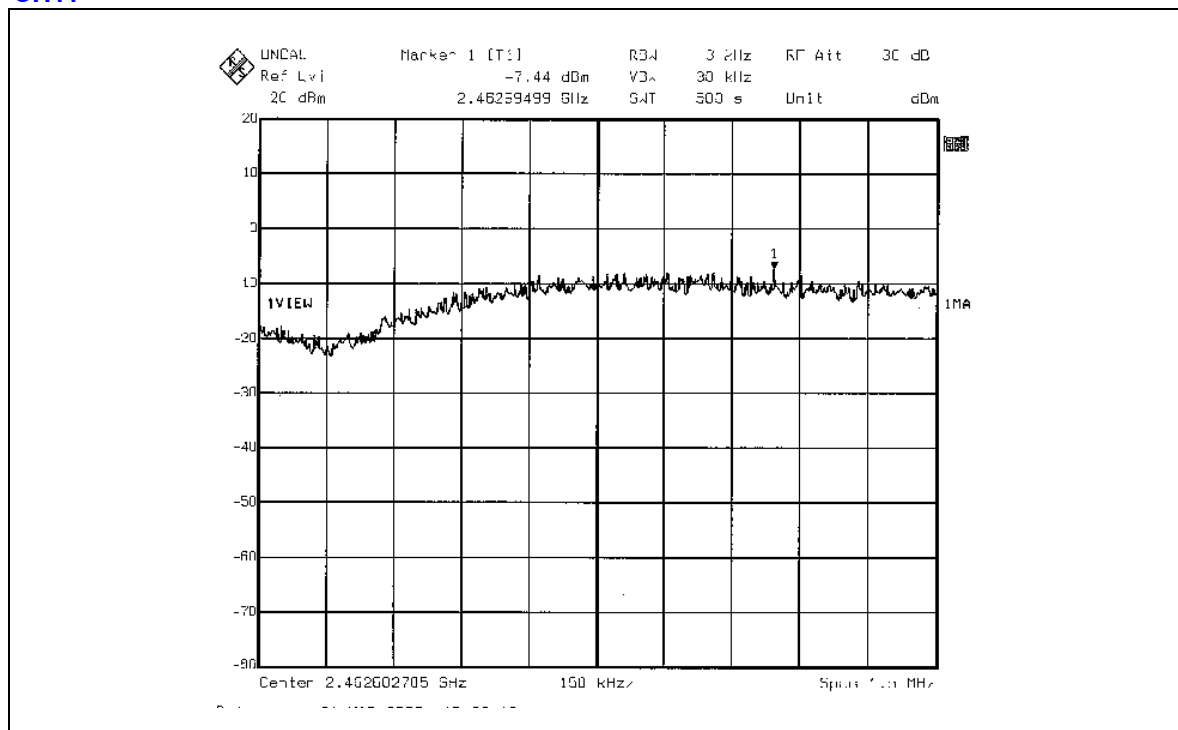




### 802.11g OFDM MODULATION


<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	6Mbps
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	26deg.C, 66%RH, 991hPa
<b>TESTED BY</b>	Long Chen		

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz )</b>	<b>RF POWER LEVEL IN 3 kHz BW (dBm)</b>	<b>MAXIMUM LIMIT (dBm)</b>	<b>PASS/FAIL</b>
1	2412	-13.40	8	PASS
6	2437	-13.35	8	PASS
11	2462	-13.58	8	PASS


CH1

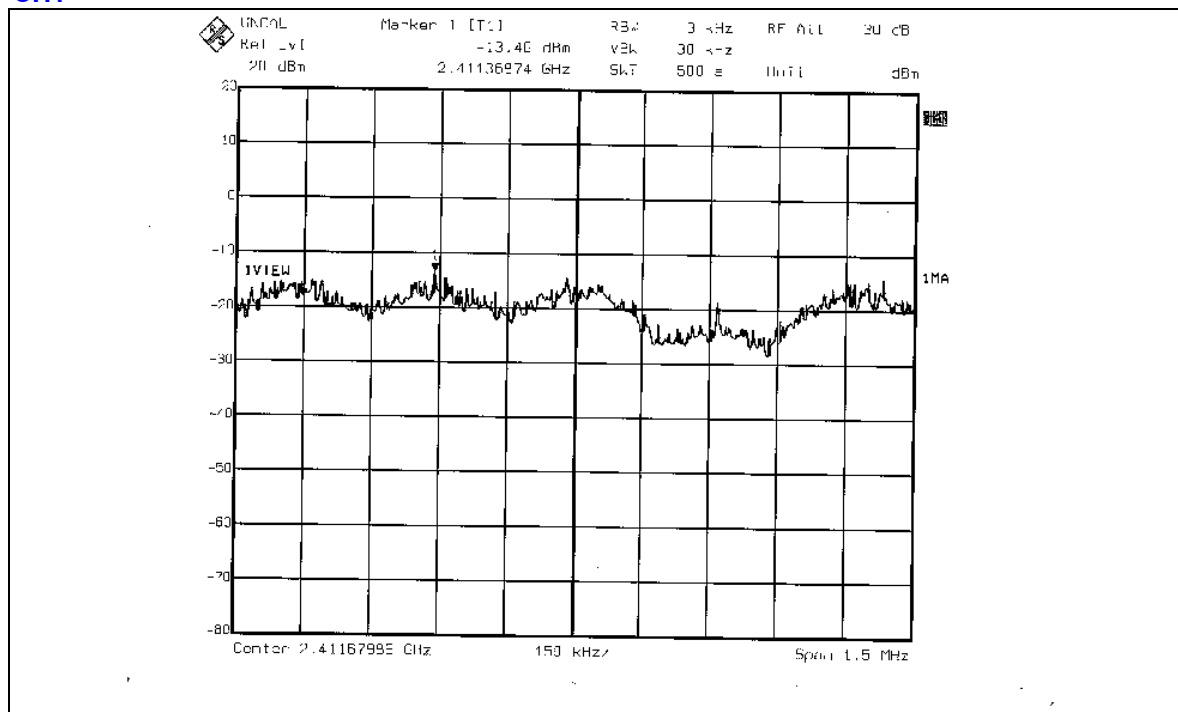

CH6

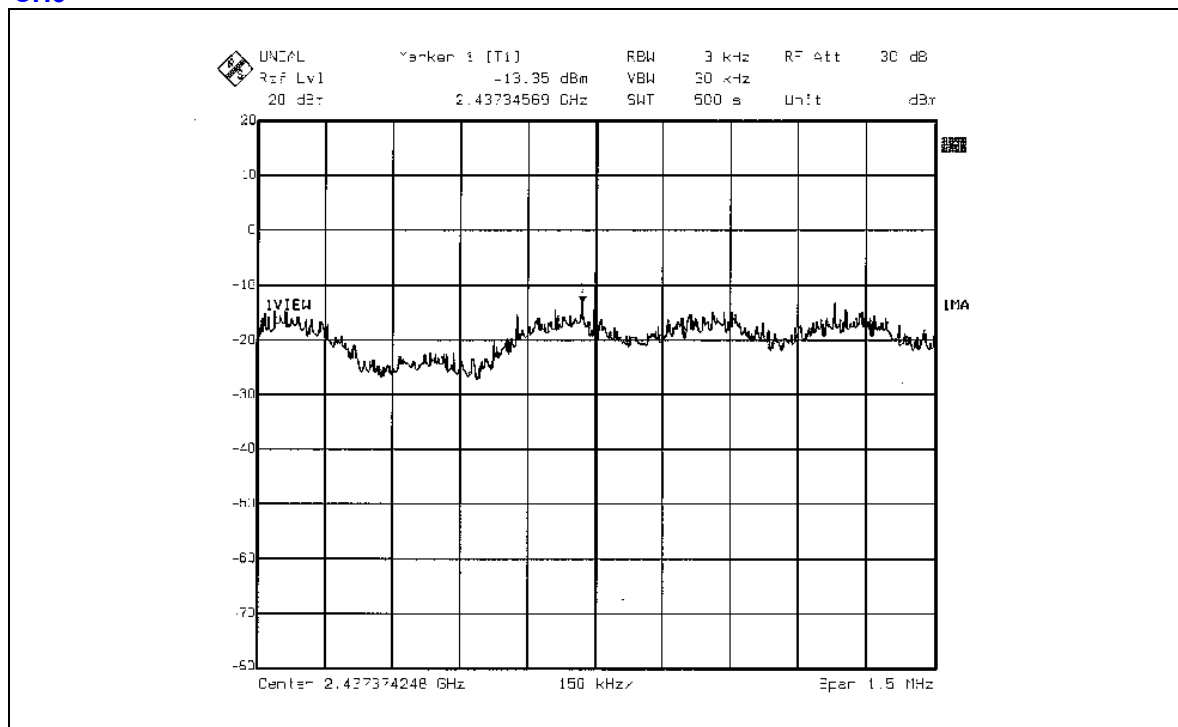

CH11

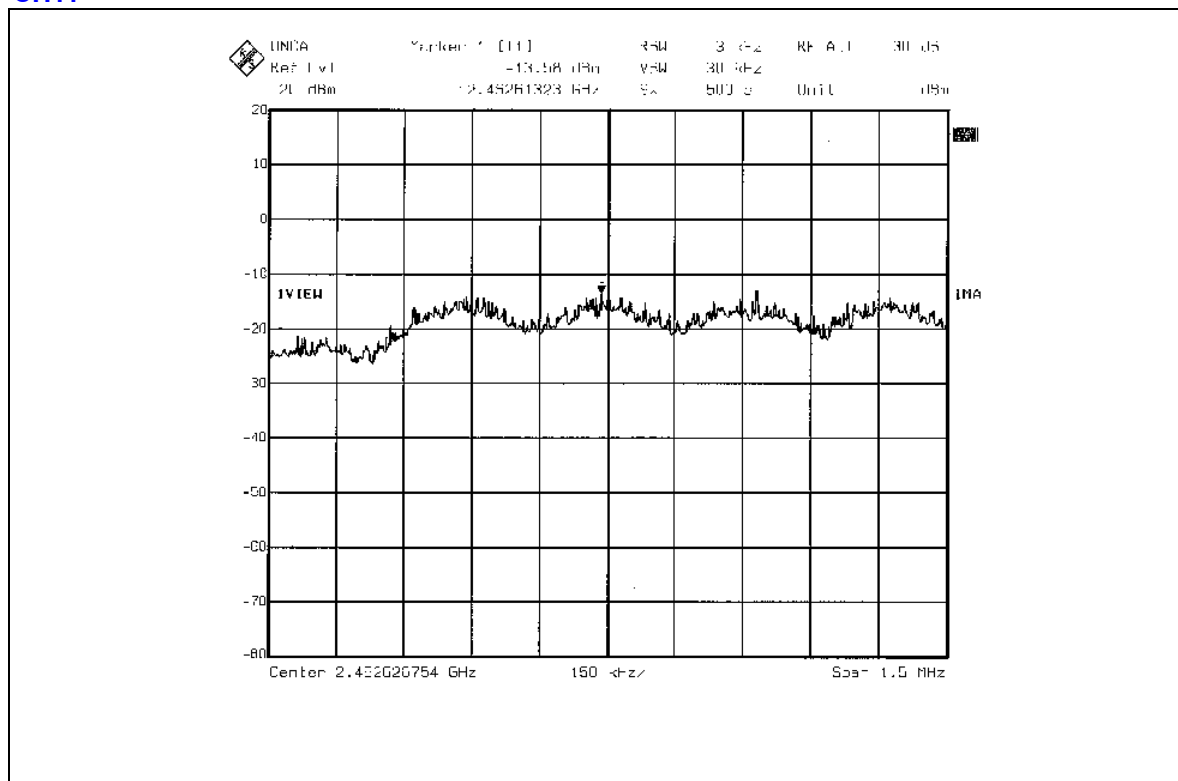



## 4.6 BAND EDGES MEASUREMENT

### 4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below  $-20\text{dB}$  of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded. The spectrum plots (Peak RBW=VBW=100kHz; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

#### 4.6.6 TEST RESULTS

The spectrum plots are attached on the following 12 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).



#### 802.11b DSSS MODULATION



**NOTE 1:** The band edge emission plot on the next page shows 58.59dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 113.22dBuV/m (Peak), so the maximum field strength in restrict band is  $113.22 - 58.59 = 54.63$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next page shows 60.53dBc between carrier maximum power and local maximum emission in restrict band (2.3894GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 109.93dBuV/m (Average), so the maximum field strength in restrict band is  $109.93 - 60.53 = 49.40$ dBuV/m which is under 54dBuV/m limit.



**NOTE 2:** The band edge emission plot on the next second page shows 59.11dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 112.77dBuV/m (Peak), so the maximum field strength in restrict band is  $112.77 - 59.11 = 53.66$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 60.39dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 109.30dBuV/m (Average), so the maximum field strength in restrict band is  $109.30 - 60.39 = 48.91$ dBuV/m which is under 54dBuV/m limit.

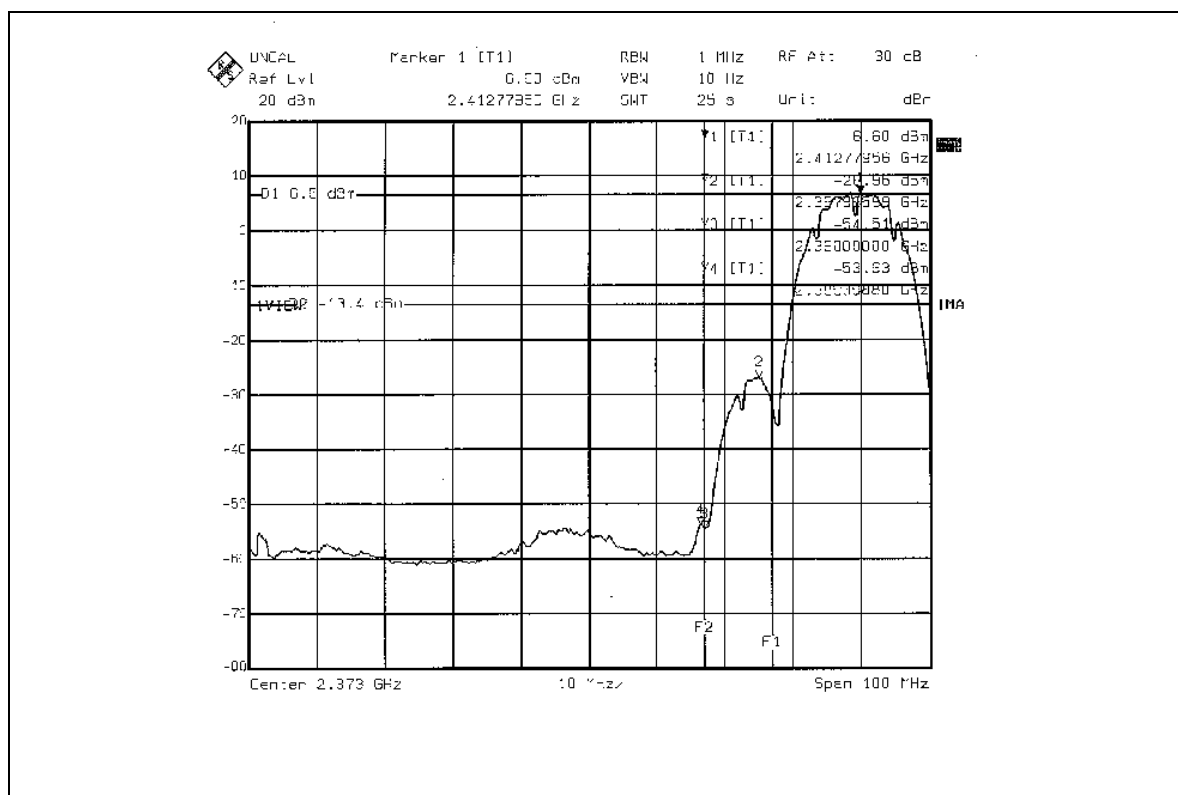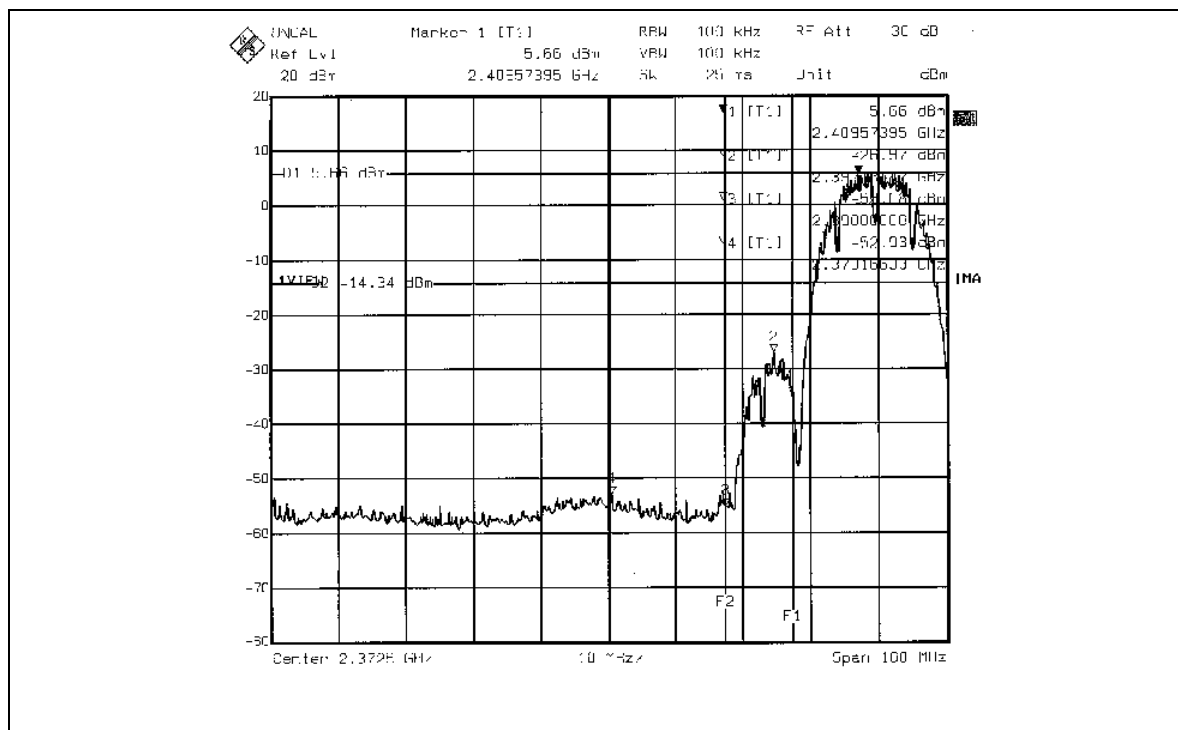

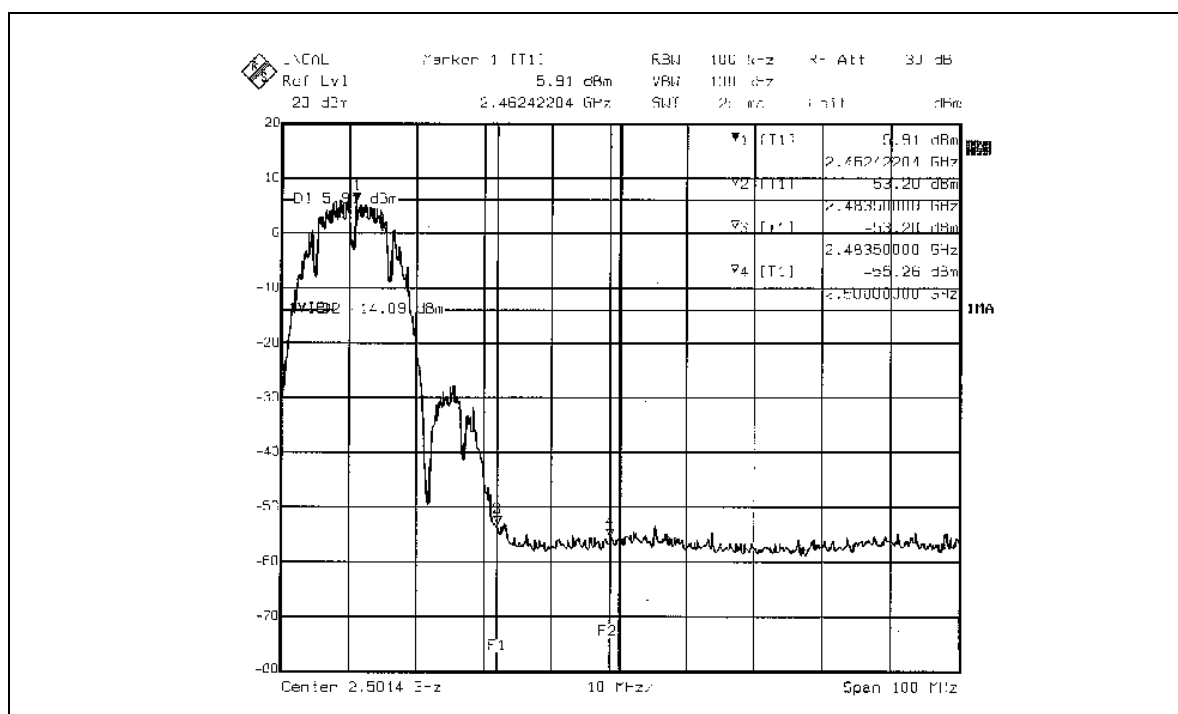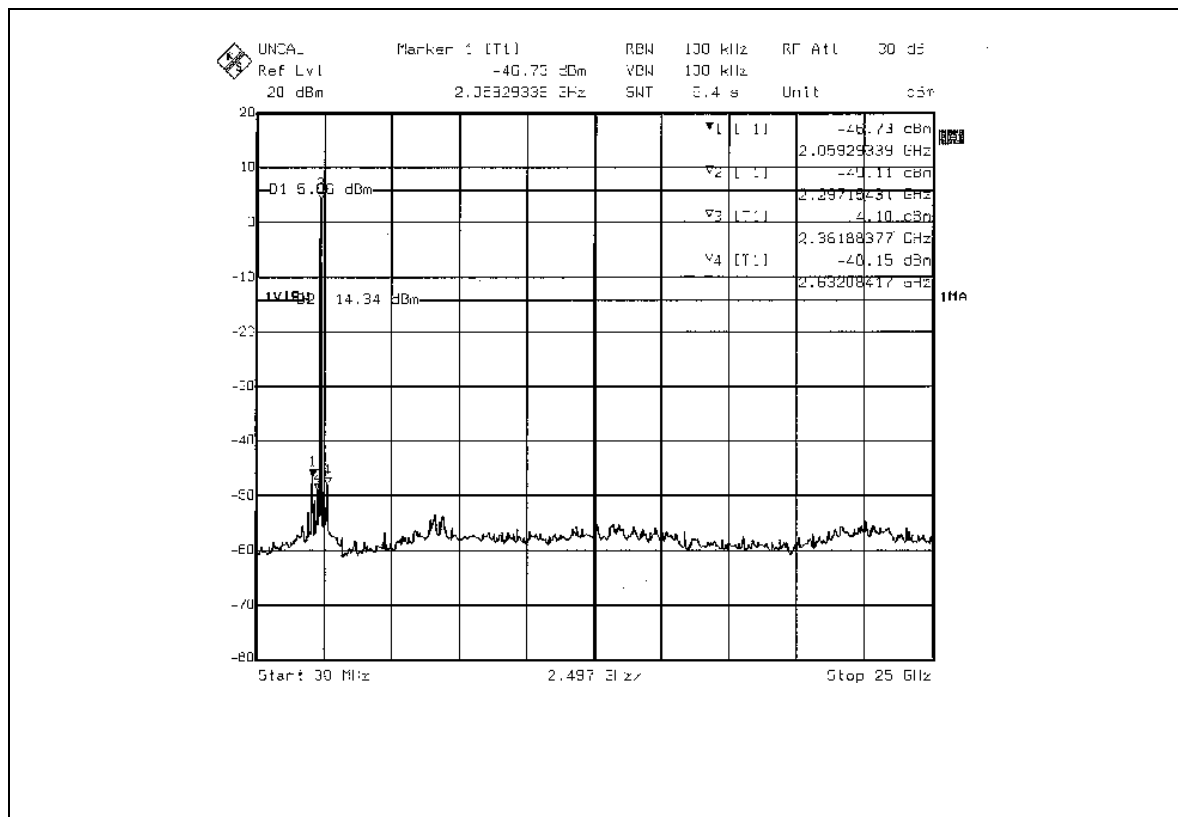



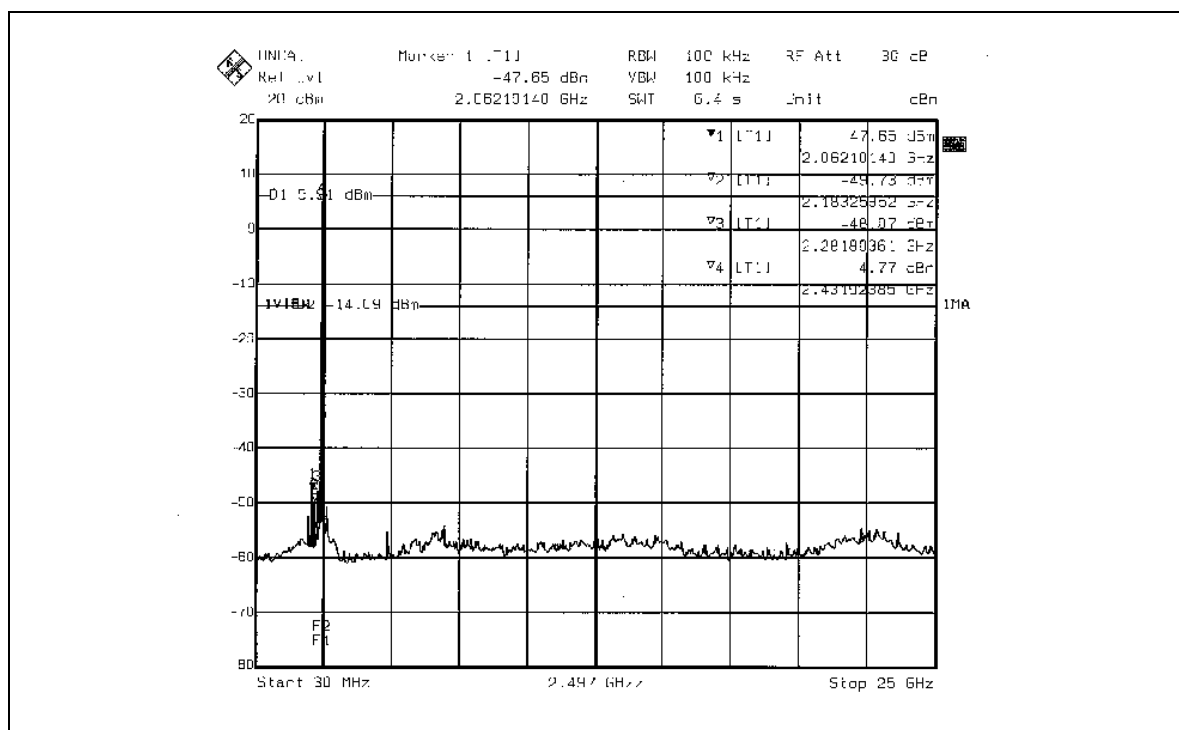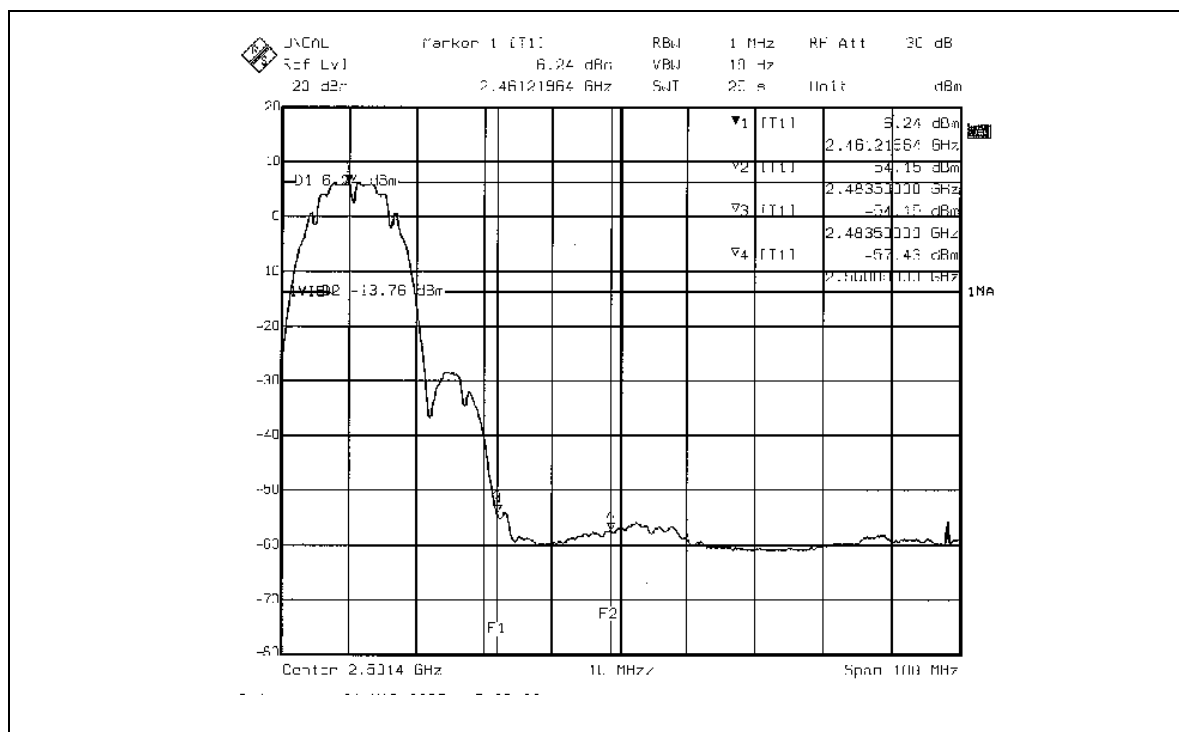

## 802.11g OFDM MODULATION



**NOTE 1:** The band edge emission plot on the next page shows 50.00dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 112.46dBuV/m (Peak), so the maximum field strength in restrict band is  $112.46 - 50.00 = 62.46$  dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 50.91dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 101.70dBuV/m (Average), so the maximum field strength in restrict band is  $101.70 - 50.91 = 50.79$  dBuV/m which is under 54dBuV/m limit.

**NOTE 2:** The band edge emission plot on next second page shows 50.16dBc between carrier maximum power and local maximum emission in restrict band (2.4837GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 112.42dBuV/m (Peak), so the maximum field strength in restrict band is  $112.42 - 50.16 = 62.26$  dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on next third page shows 49.25dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 101.87dBuV/m (Average), so the maximum field strength in restrict band is  $101.87 - 49.25 = 52.62$  dBuV/m which is under 54dBuV/m limit.



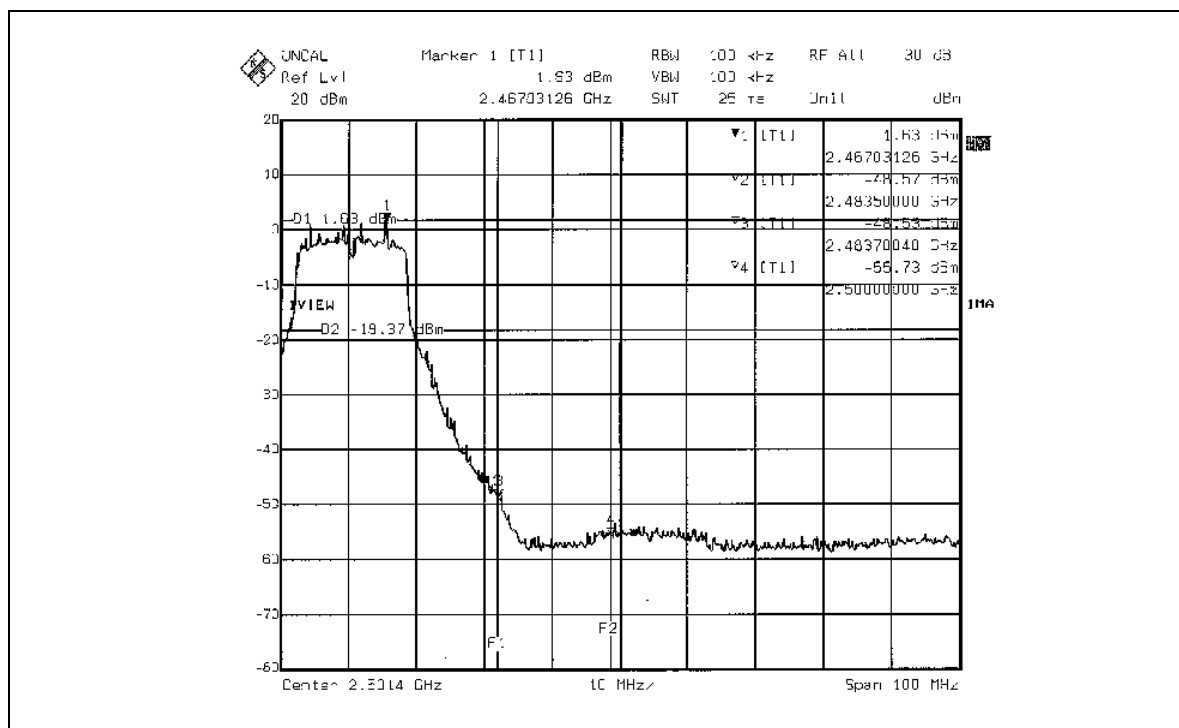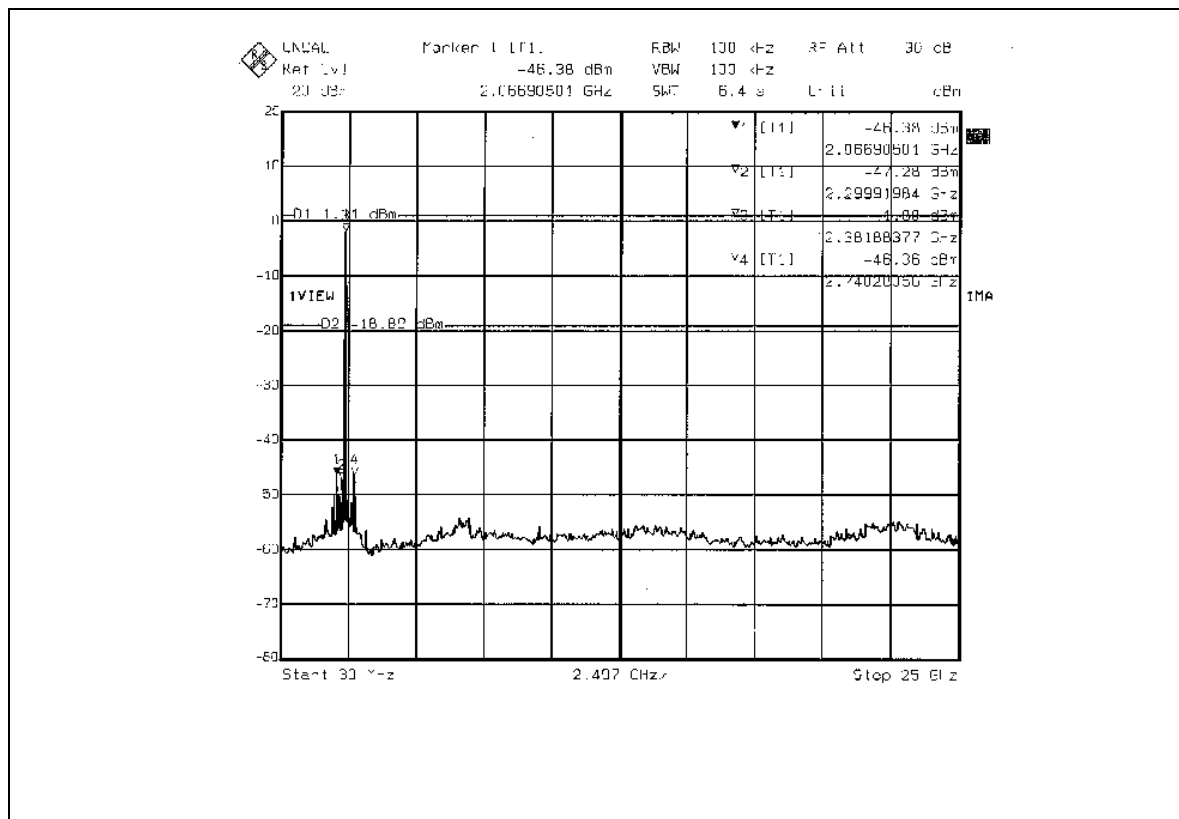

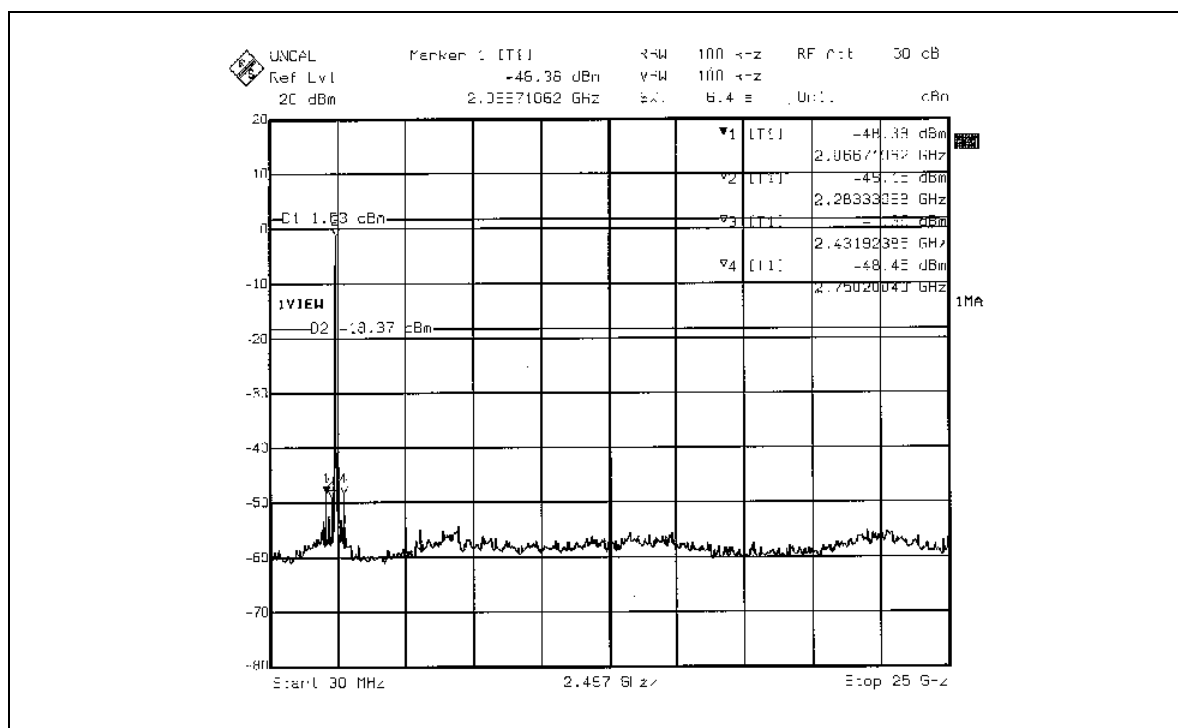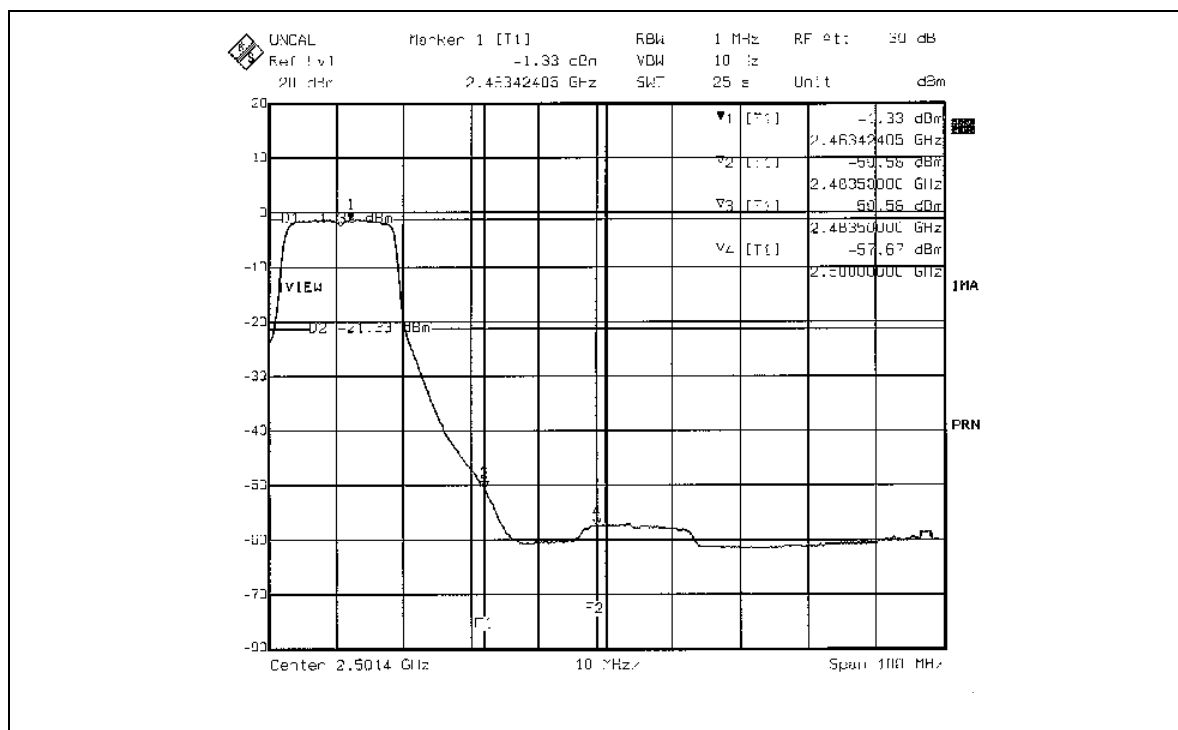

## **4.7 ANTENNA REQUIREMENT**

### **4.7.1 STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **4.7.2 ANTENNA CONNECTED CONSTRUCTION**

The antenna used in this product is Dipole antenna without antenna connector. The maximum Gain of the antenna is 3.3dBi.

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

### CONDUCTED EMISSION TEST TEST MODE A



### TEST MODE B







### TEST MODE C



# RADIATED EMISSION TEST TEST MODE A

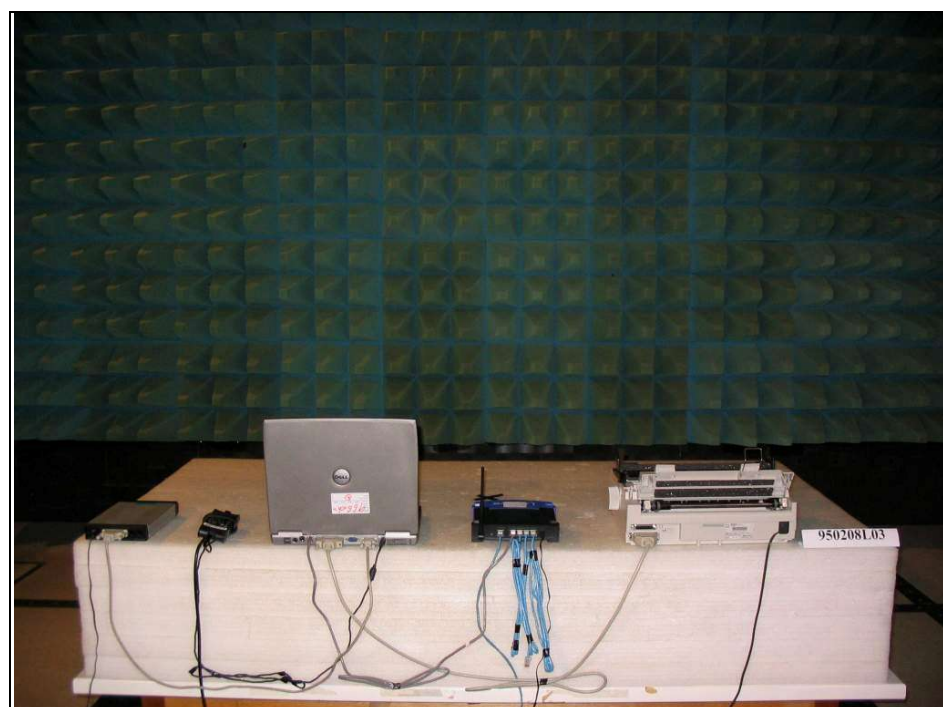


### TEST MODE B

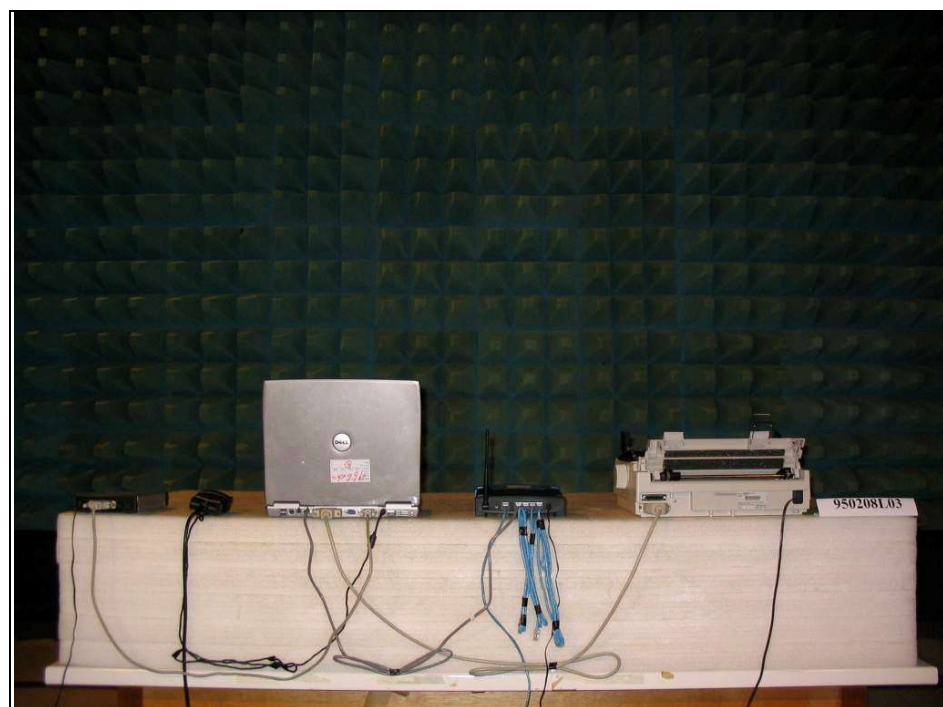



### TEST MODE C

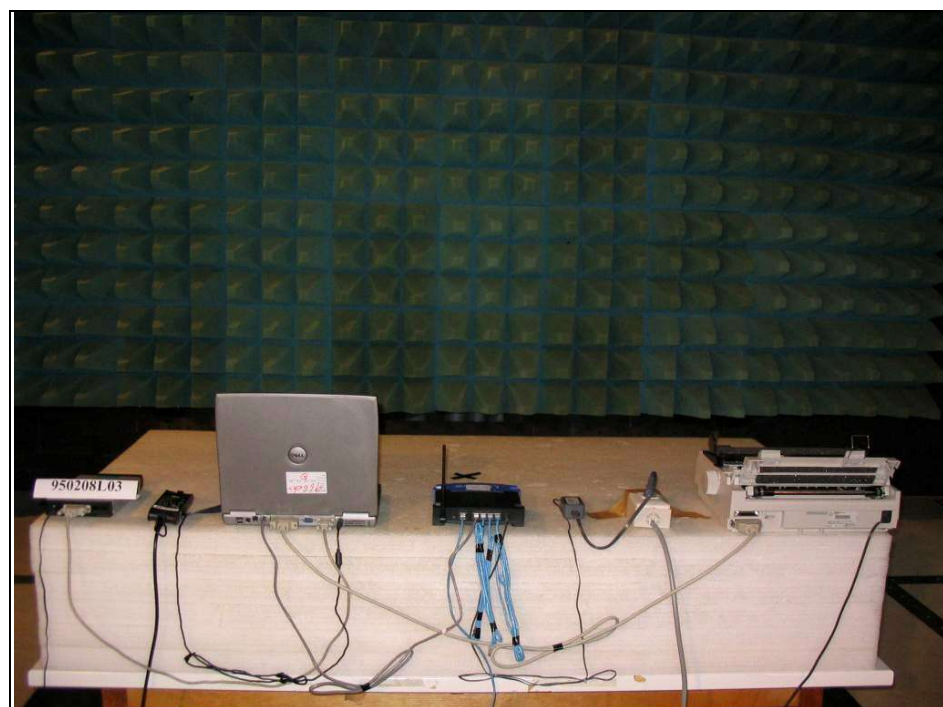



## 6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025

<b>USA</b>	FCC, UL, A2LA
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>Norway</b>	NEMKO
<b>Canada</b>	INDUSTRY CANADA , CSA
<b>R.O.C.</b>	CNLA, BSMI, DGT
<b>Netherlands</b>	Telefication
<b>Singapore</b>	PSB , GOST-ASIA(MOU)
<b>Russia</b>	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

[www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml). If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26052943

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3185050

**Linko RF Lab.**

Tel: 886-3-3270910

Fax: 886-3-3270892

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.



## **APPENDIX-A**

### **MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.