



FCC TEST REPORT

REPORT NO.: RF960712L11

MODEL NO.: WRT100

RECEIVED: Jul. 13, 2007

TESTED: Jul. 22 ~ Aug. 28, 2007

ISSUED: Aug. 30, 2007

APPLICANT: Cisco-Linksys LLC

ADDRESS: 121 Theory Drive Irvine, CA 92617 (USA)

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: 47 14th Lin, Chiapau Tsun, Linko, Taipei, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Kueishan, Taoyuan, Taiwan, R.O.C.

This test report consists of 120 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF, A2LA or any government agencies. The test results in the report only apply to the tested sample.





TABLE OF CONTENTS

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3.	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	8
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	9
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	10
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	12
3.4	DESCRIPTION OF SUPPORT UNITS	13
4.	TEST TYPES AND RESULTS	14
4.1	CONDUCTED EMISSION MEASUREMENT	14
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	14
4.1.2	TEST INSTRUMENTS	14
4.1.3	TEST PROCEDURES	15
4.1.4	DEVIATION FROM TEST STANDARD	15
4.1.5	TEST SETUP	16
4.1.6	EUT OPERATING CONDITIONS	16
4.1.7	TEST RESULTS	17
4.2	RADIATED EMISSION MEASUREMENT	53
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	53
4.2.2	TEST INSTRUMENTS	54
4.2.3	TEST PROCEDURES	55
4.2.4	DEVIATION FROM TEST STANDARD	55
4.2.5	TEST SETUP	56
4.2.6	EUT OPERATING CONDITIONS	56
4.2.7	TEST RESULTS	57
4.3	6dB BANDWIDTH MEASUREMENT	75
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	75
4.3.2	TEST INSTRUMENTS	75
4.3.3	TEST PROCEDURE	75
4.3.4	DEVIATION FROM TEST STANDARD	75
4.3.5	TEST SETUP	76
4.3.6	EUT OPERATING CONDITIONS	76
4.3.7	TEST RESULTS	77
4.4	MAXIMUM PEAK OUTPUT POWER	85
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	85



4.4.2	INSTRUMENTS.....	85
4.4.3	TEST PROCEDURES	85
4.4.4	DEVIATION FROM TEST STANDARD	85
4.4.5	TEST SETUP.....	86
4.4.6	EUT OPERATING CONDITIONS	86
4.4.7	TEST RESULTS	87
4.5	POWER SPECTRAL DENSITY MEASUREMENT	89
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	89
4.5.2	TEST INSTRUMENTS.....	89
4.5.3	TEST PROCEDURE.....	89
4.5.4	DEVIATION FROM TEST STANDARD	89
4.5.5	TEST SETUP.....	90
4.5.6	EUT OPERATING CONDITION	90
4.5.7	TEST RESULTS	91
4.6	BAND EDGES MEASUREMENT.....	99
4.6.1	LIMITS OF BAND EDGES MEASUREMENT.....	99
4.6.2	TEST INSTRUMENTS.....	99
4.6.3	TEST PROCEDURE.....	100
4.6.4	DEVIATION FROM TEST STANDARD	100
4.6.5	EUT OPERATING CONDITION	100
4.6.6	TEST RESULTS	101
4.7	ANTENNA REQUIREMENT	117
4.7.1	STANDARD APPLICABLE	117
4.7.2	ANTENNA CONNECTED CONSTRUCTION	117
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	118
6.	INFORMATION ON THE TESTING LABORATORIES	119
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	120



1. CERTIFICATION

PRODUCT: RangePlus Wireless Router

MODEL: WRT100

BRAND: Linksys

APPLICANT: Cisco-Linksys LLC

TESTED: Jul. 22 ~ Aug. 28, 2007

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 15, Subpart C (Section 15.247)

ANSI C63.4-2003

The above equipment (model: WRT100) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Peggy Chen , **DATE:** Aug. 30, 2007
Peggy Chen / Specialist

TECHNICAL ACCEPTANCE : Long Chen , **DATE:** Aug. 30, 2007
Responsible for RF Long Chen / Senior Engineer

APPROVED BY : Gary Chang , **DATE:** Aug. 30, 2007
Gary Chang / Assistant Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -3.86 dB at 0.825 MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit : min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -0.85 dB at 55.18 MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz ~ 30MHz	2.44dB
Radiated emissions	30MHz ~ 200MHz	3.19 dB
	200MHz ~1000MHz	3.21 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	RangePlus Wireless Router
MODEL NO.	WRT100
FCC ID	Q87-WRT100
POWER SUPPLY	12Vdc from AC adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps Draft 802.11n (20MHz): 72.2/ 65.0/ 57.7/ 43.3/ 28.8/ 21.6/ 14.4/ 7.2Mbps Draft 802.11n (40MHz): 150.0/ 135.0/ 120.0/ 90.0/ 60.0/ 45.0/ 30.0/ 15.0Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11 for 802.11b, 802.11g, Draft 802.11n (20MHz) 7 for Draft 802.11n (40MHz)
MAXIMUM OUTPUT POWER	126.765mW
ANTENNA TYPE	Dipole antenna -0: with 2.3dBi gain Dipole antenna -1: with 1.4dBi gain
DATA CABLE	NA
I/O PORTS	RJ45
ACCESSORY DEVICES	Adapter

NOTE:

1. The EUT was powered by the following adapters:

Adapter 1:

Brand:	Linksys
Model:	AD12/1A (RHQ-120100-1)
Input:	100-120Vac, 50-60Hz, 0.35A
Output:	12Vdc, 1A
Power Line:	1.8m non-shielded cable without core

Adapter 2:

Brand:	DVE
Model:	DSA-12R-12 AUS 120120
Input:	100-120Vac, 50-60Hz, 0.3A
Output:	12Vdc, 1A
Power Line:	1.8m non-shielded cable without core

2. When the EUT operating in 802.11b/g, the software operation, which is defined by manufacturer, only set single Tx.
3. When the EUT operating in draft 802.11n, the software operation, which is defined by manufacturer, only set 0 ~ 15 of "MCS" (MCS: Modulation and Coding Schemes) for single Tx.
4. The EUT complies with draft 802.11n standards and backwards compatible with 802.11b, 802.11g products.
5. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 150Mbps.
6. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES


Eleven channels are provided for 802.11b, 802.11g and draft 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Seven channels are provided for draft 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2422MHz	5	2442MHz
2	2427MHz	6	2447MHz
3	2432MHz	7	2452MHz
4	2437MHz		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

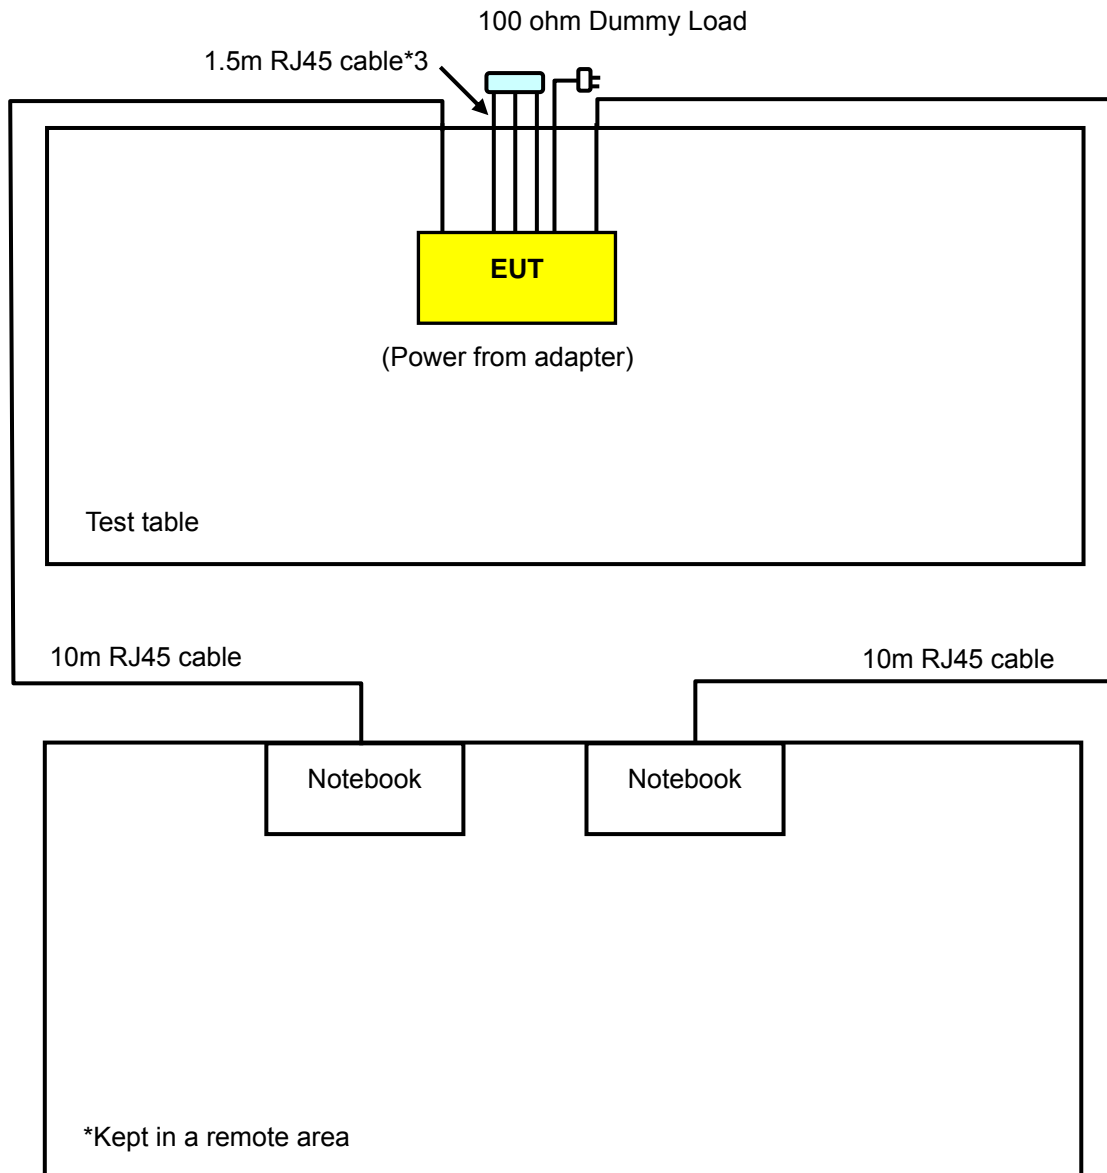

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	
A	√	√	√	√	Power from adapter 1
B	√	√	-	-	Power from adapter 2

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz
RE ≥ 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement
“-”: Means no effect.

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A, B	Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
A, B	Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	15.0

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11g	1 to 11	1	OFDM	BPSK	6.0
A, B	Draft 802.11n (20MHz)	1 to 11	1	OFDM	BPSK	7.2
A, B	Draft 802.11n (40MHz)	1 to 7	1	OFDM	BPSK	15.0



RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
A	Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	15.0

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
A	Draft 802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	7.2
A	Draft 802.11n (40MHz)	1 to 7	1, 7	OFDM	BPSK	15.0



ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
A	Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	15.0

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	LOAD	NA	NA	NA	NA
2	NOTEBOOK COMPUTER	DELL	PP05L	20838027664	E2K24CLNS
3	NOTEBOOK COMPUTER	DELL	PP05L	9954115984	E2K24CLNS

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	1.5 m RJ45 UTP Cable*3
2	10.0 m RJ45 UTP Cable
3	10.0 m RJ45 UTP Cable

NOTE: All power cords of the above support units are non shielded (1.8m).

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Sep. 25, 2007
RF signal cable Woken	5D-FB	Cable-HYCO3-01	Jan. 06, 2008
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Jan. 08, 2008
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Jan. 16, 2008
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2.
 3. The VCCI Site Registration No. is C-2047.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

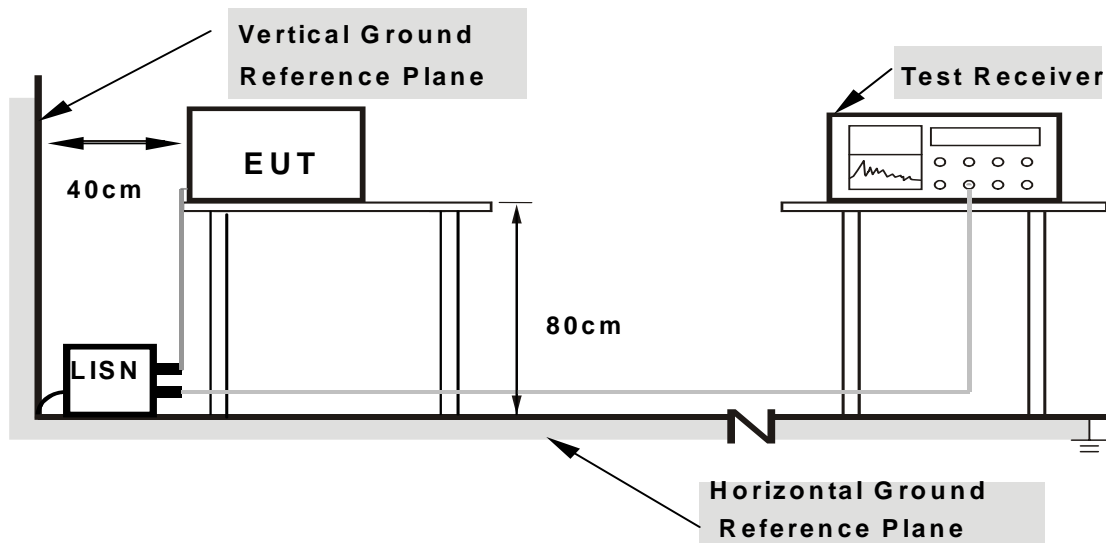

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Prepared two notebook computers and placed it outside of testing area to act as communication partners for EUT.
- c. The communication partners ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- d. The communication partners communicate with each other via EUT.


4.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA 802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 68% RH, 991hPa	TEST MODE	A
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.166	0.10	52.81	-	52.91	-	65.18	55.18	-12.27	-
2	0.496	0.10	44.12	-	44.22	-	56.06	46.06	-11.84	-
3	0.826	0.11	45.94	41.77	46.05	41.88	56.00	46.00	-9.95	-4.12
4	1.156	0.13	44.38	-	44.51	-	56.00	46.00	-11.49	-
5	1.318	0.14	45.39	-	45.53	-	56.00	46.00	-10.47	-
6	2.295	0.23	43.99	-	44.22	-	56.00	46.00	-11.78	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

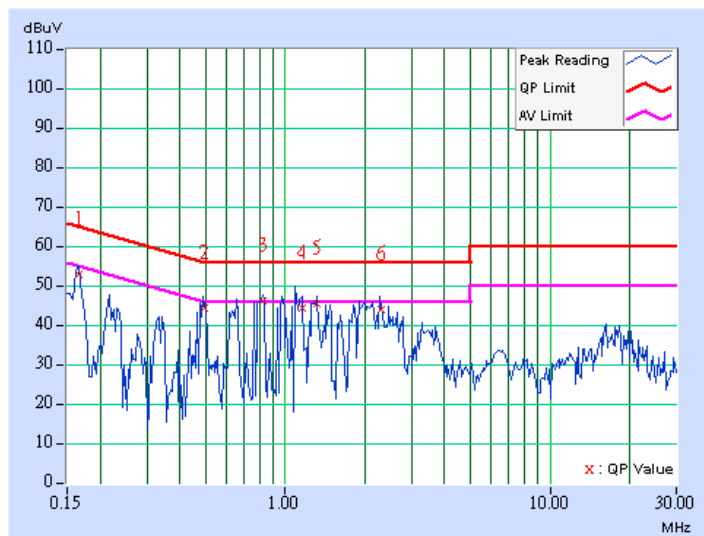

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 68% RH, 991hPa	TEST MODE	A
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.165	0.10	51.43	-	51.53	-	65.20	55.20	-13.67	-
2	0.660	0.15	39.47	-	39.62	-	56.00	46.00	-16.38	-
3	0.826	0.18	43.17	-	43.35	-	56.00	46.00	-12.65	-
4	1.152	0.21	42.79	-	43.00	-	56.00	46.00	-13.00	-
5	1.322	0.21	43.62	-	43.83	-	56.00	46.00	-12.17	-
6	1.992	0.22	39.92	-	40.14	-	56.00	46.00	-15.86	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

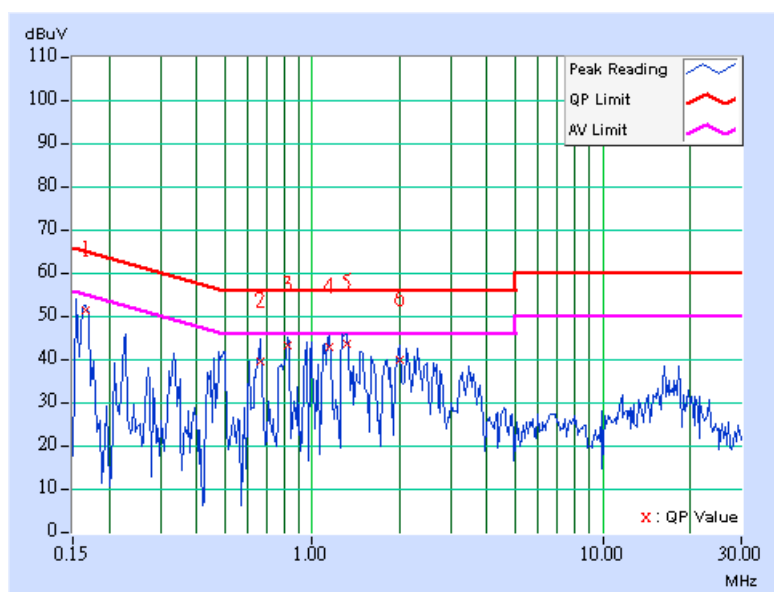

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 68% RH, 991hPa	TEST MODE	A
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.164	0.10	53.15	-	53.25	-	65.24	55.24	-11.99	-
2	0.331	0.10	42.76	-	42.86	-	59.42	49.42	-16.56	-
3	0.826	0.11	45.94	41.84	46.05	41.95	56.00	46.00	-9.95	-4.05
4	0.988	0.11	44.26	-	44.37	-	56.00	46.00	-11.63	-
5	1.318	0.14	45.49	-	45.63	-	56.00	46.00	-10.37	-
6	1.977	0.22	43.05	-	43.27	-	56.00	46.00	-12.73	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

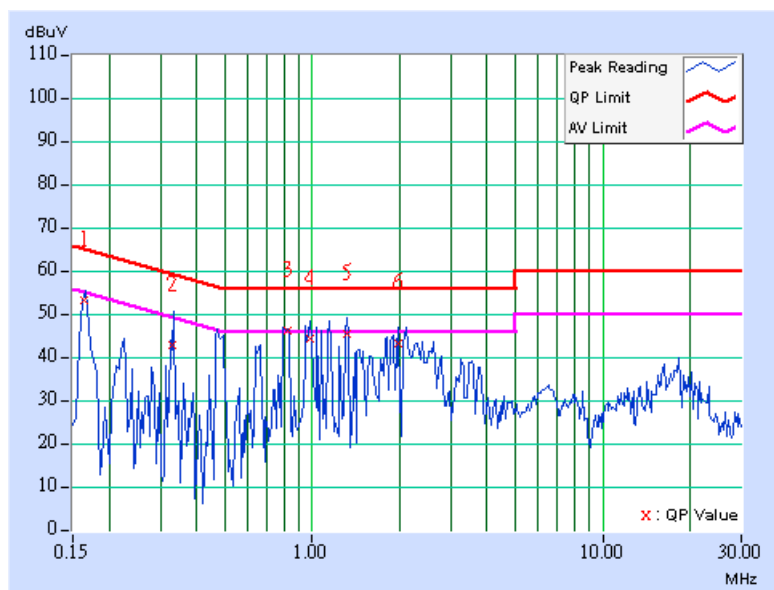

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 68% RH, 991hPa	TEST MODE	A
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.164	0.10	51.47	-	51.57	-	65.24	55.24	-13.67	-
2	0.330	0.10	39.41	-	39.51	-	59.46	49.46	-19.95	-
3	0.826	0.18	43.29	-	43.47	-	56.00	46.00	-12.53	-
4	0.991	0.21	42.15	-	42.36	-	56.00	46.00	-13.64	-
5	1.109	0.21	37.90	-	38.11	-	56.00	46.00	-17.89	-
6	1.320	0.21	43.59	-	43.80	-	56.00	46.00	-12.20	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

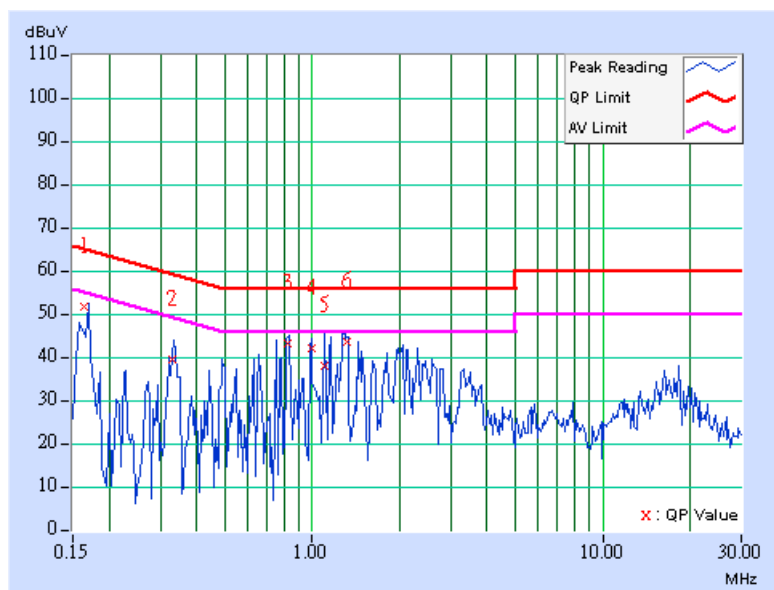

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 68% RH, 991hPa	TEST MODE	A
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.163	0.10	53.05	-	53.15	-	65.31	55.31	-12.16	-
2	0.330	0.10	42.62	-	42.72	-	59.46	49.46	-16.74	-
3	0.495	0.10	44.46	-	44.56	-	56.08	46.08	-11.52	-
4	0.988	0.11	44.02	-	44.13	-	56.00	46.00	-11.87	-
5	1.317	0.14	45.26	-	45.40	-	56.00	46.00	-10.60	-
6	2.305	0.23	41.68	-	41.91	-	56.00	46.00	-14.09	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

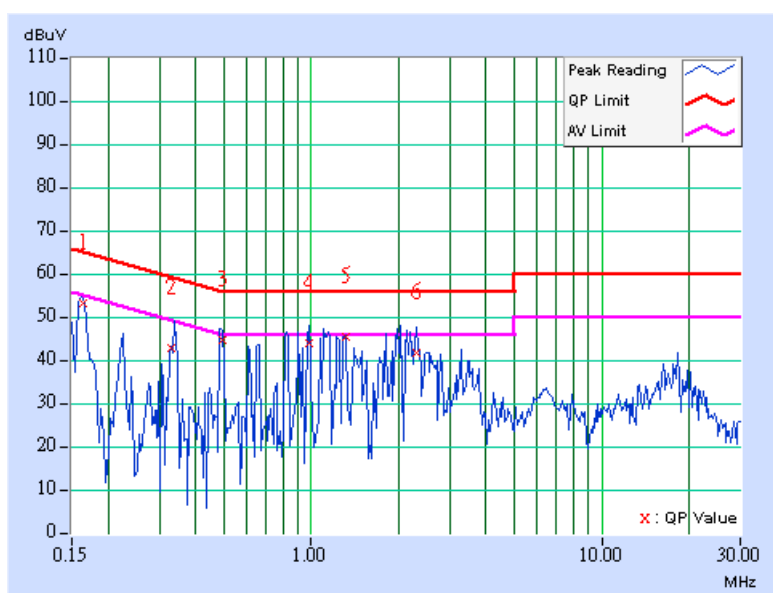

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 68% RH, 991hPa	TEST MODE	A
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.164	0.10	51.27	-	51.37	-	65.24	55.24	-13.87	-
2	0.329	0.10	39.79	-	39.89	-	59.47	49.47	-19.58	-
3	0.829	0.18	43.45	-	43.63	-	56.00	46.00	-12.37	-
4	1.163	0.21	43.02	-	43.23	-	56.00	46.00	-12.77	-
5	1.328	0.21	43.82	-	44.03	-	56.00	46.00	-11.97	-
6	1.992	0.22	40.41	-	40.63	-	56.00	46.00	-15.37	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

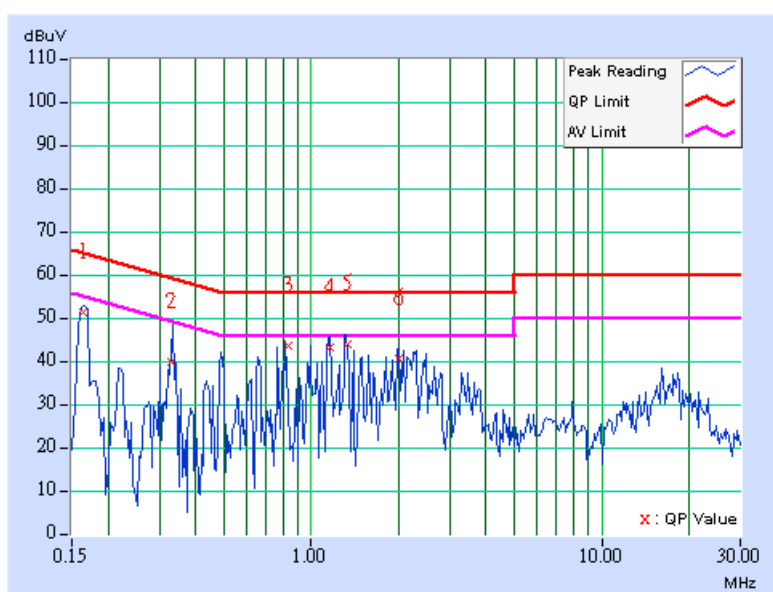

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 68% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.10	45.71	-	45.81	-	64.79	54.79	-18.98	-
2	0.259	0.10	40.02	-	40.12	-	61.45	51.45	-21.33	-
3	0.345	0.10	42.04	-	42.14	-	59.08	49.08	-16.94	-
4	1.465	0.16	40.06	-	40.22	-	56.00	46.00	-15.78	-
5	1.897	0.21	41.61	-	41.82	-	56.00	46.00	-14.18	-
6	2.241	0.23	40.85	-	41.08	-	56.00	46.00	-14.92	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

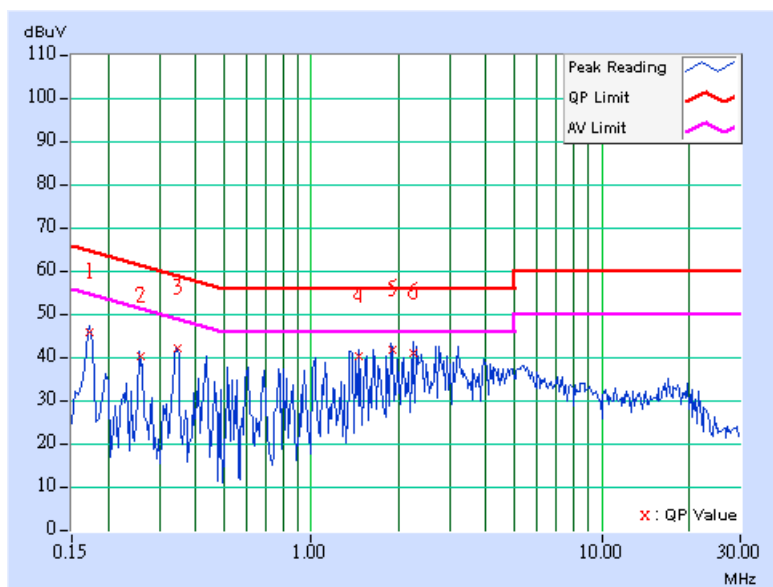

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 68% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.10	45.39	-	45.49	-	64.79	54.79	-19.30	-
2	0.259	0.10	39.86	-	39.96	-	61.45	51.45	-21.49	-
3	0.345	0.10	41.29	-	41.39	-	59.07	49.07	-17.68	-
4	1.556	0.22	39.50	-	39.72	-	56.00	46.00	-16.28	-
5	1.989	0.22	40.10	-	40.32	-	56.00	46.00	-15.68	-
6	2.938	0.25	37.79	-	38.04	-	56.00	46.00	-17.96	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

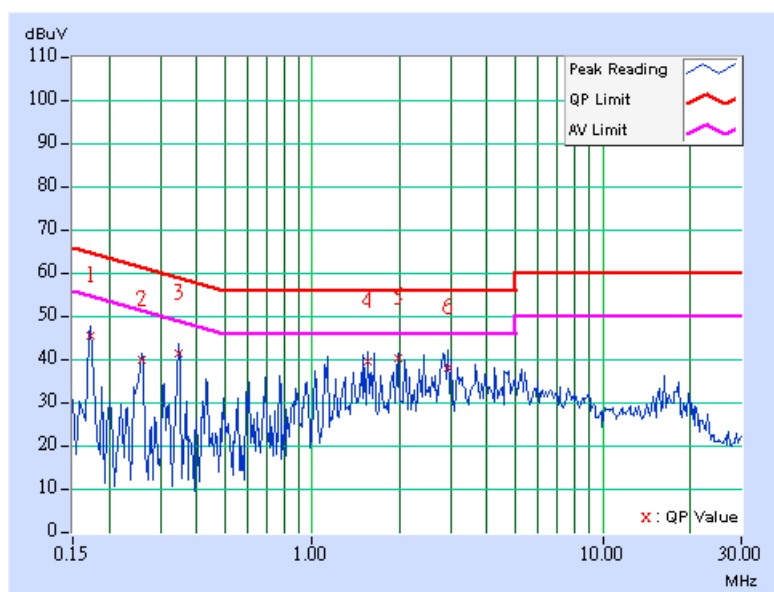

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 68% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.10	46.20	-	46.30	-	64.82	54.82	-18.52	-
2	0.258	0.10	40.57	-	40.67	-	61.51	51.51	-20.84	-
3	0.344	0.10	42.69	-	42.79	-	59.10	49.10	-16.31	-
4	0.603	0.10	37.38	-	37.48	-	56.00	46.00	-18.52	-
5	1.894	0.21	41.86	-	42.07	-	56.00	46.00	-13.93	-
6	2.665	0.24	43.30	-	43.54	-	56.00	46.00	-12.46	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

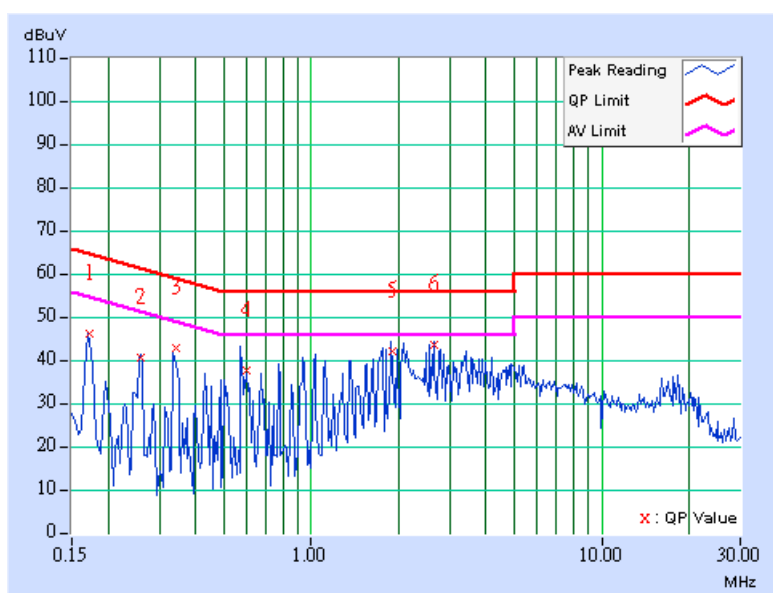

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 68% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.171	0.10	46.00	-	46.10	-	64.90	54.90	-18.80	-
2	0.258	0.10	41.26	-	41.36	-	61.50	51.50	-20.14	-
3	0.344	0.10	42.04	-	42.14	-	59.11	49.11	-16.97	-
4	1.119	0.21	37.85	-	38.06	-	56.00	46.00	-17.94	-
5	2.234	0.23	39.93	-	40.16	-	56.00	46.00	-15.84	-
6	2.326	0.23	41.07	-	41.30	-	56.00	46.00	-14.70	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

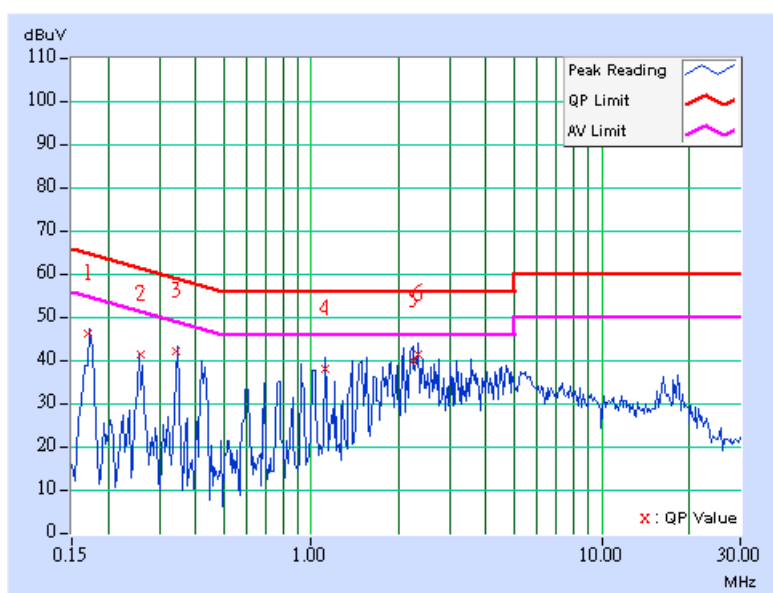

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 68% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.173	0.10	46.02	-	46.12	-	64.80	54.80	-18.68	-
2	0.257	0.10	40.82	-	40.92	-	61.54	51.54	-20.62	-
3	0.344	0.10	42.76	-	42.86	-	59.09	49.09	-16.23	-
4	1.117	0.12	39.04	-	39.16	-	56.00	46.00	-16.84	-
5	1.892	0.21	41.75	-	41.96	-	56.00	46.00	-14.04	-
6	2.324	0.23	40.99	-	41.22	-	56.00	46.00	-14.78	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

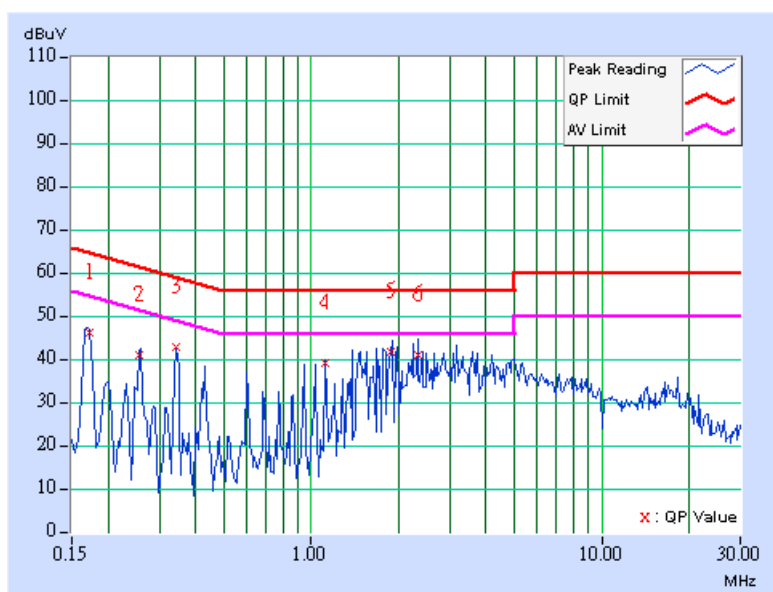

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 68% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.172	0.10	46.34	-	46.44	-	64.87	54.87	-18.43	-
2	0.259	0.10	41.49	-	41.59	-	61.45	51.45	-19.86	-
3	0.345	0.10	42.02	-	42.12	-	59.07	49.07	-16.95	-
4	1.375	0.21	40.03	-	40.24	-	56.00	46.00	-15.76	-
5	1.891	0.22	40.69	-	40.91	-	56.00	46.00	-15.09	-
6	2.413	0.23	35.80	-	36.03	-	56.00	46.00	-19.97	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

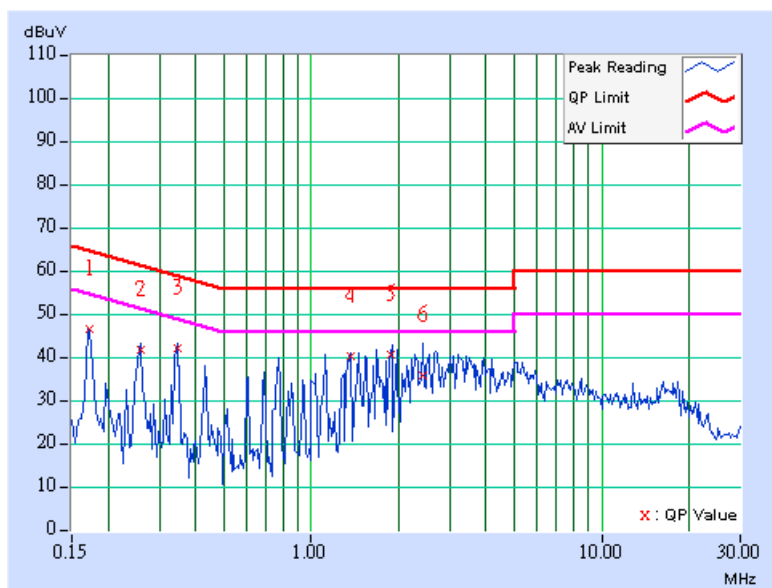


DRAFT 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	7.2Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 991hPa	TEST MODE	A
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.164	0.10	52.21	-	52.31	-	65.24	55.24	-12.93	-
2	0.329	0.10	43.51	-	43.61	-	59.48	49.48	-15.87	-
3	0.818	0.11	46.96	41.53	47.07	41.64	56.00	46.00	-8.93	-4.36
4	0.985	0.11	43.78	-	43.89	-	56.00	46.00	-12.11	-
5	1.145	0.13	46.91	39.18	47.04	39.31	56.00	46.00	-8.96	-6.69
6	2.129	0.22	42.79	-	43.01	-	56.00	46.00	-12.99	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

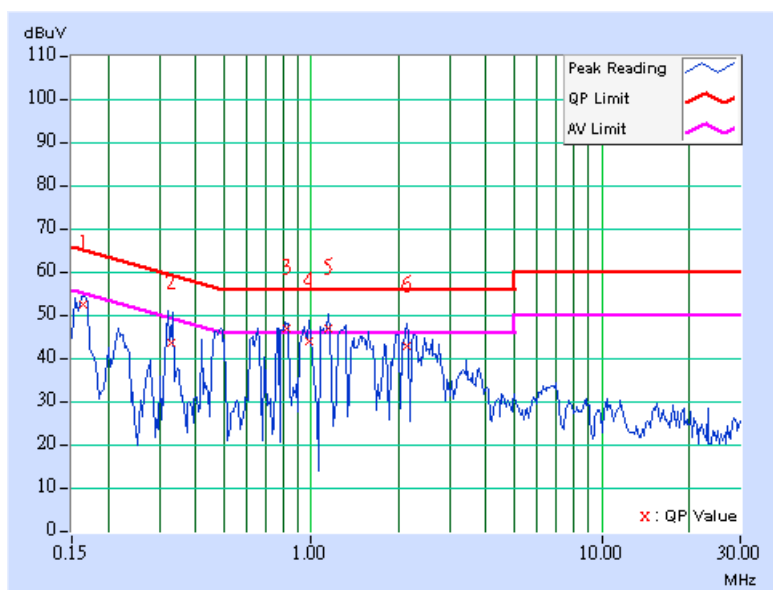

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	7.2Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 991hPa	TEST MODE	A
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.164	0.10	51.26	-	51.36	-	65.25	55.25	-13.89	-
2	0.329	0.10	39.11	-	39.21	-	59.47	49.47	-20.26	-
3	0.657	0.15	38.84	-	38.99	-	56.00	46.00	-17.01	-
4	0.823	0.18	43.12	-	43.30	-	56.00	46.00	-12.70	-
5	1.313	0.21	43.64	-	43.85	-	56.00	46.00	-12.15	-
6	1.982	0.22	39.33	-	39.55	-	56.00	46.00	-16.45	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

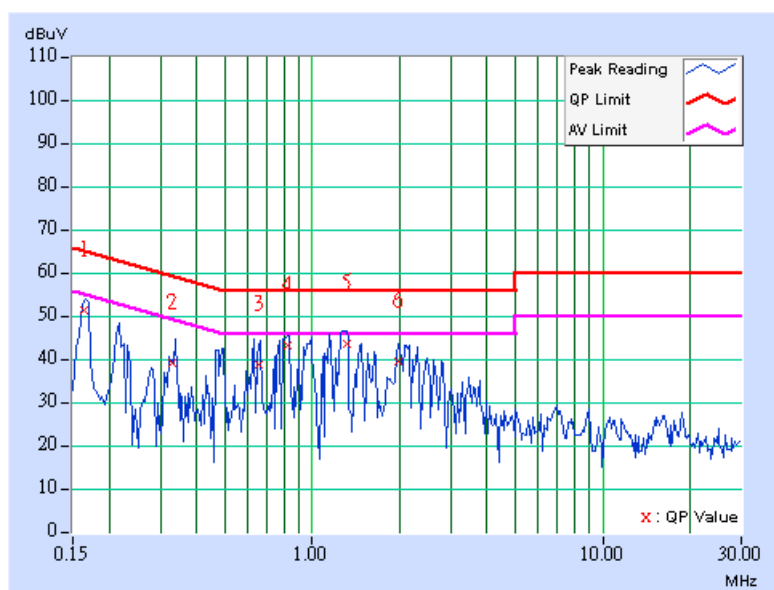

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	7.2Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 991hPa	TEST MODE	A
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.166	0.10	52.21	-	52.31	-	65.18	55.18	-12.87	-
2	0.332	0.10	43.69	-	43.79	-	59.41	49.41	-15.62	-
3	0.821	0.11	47.67	40.82	47.78	40.93	56.00	46.00	-8.22	-5.07
4	0.990	0.11	44.54	-	44.65	-	56.00	46.00	-11.35	-
5	1.316	0.14	47.01	38.23	47.15	38.37	56.00	46.00	-8.85	-7.63
6	1.984	0.22	43.33	-	43.55	-	56.00	46.00	-12.45	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

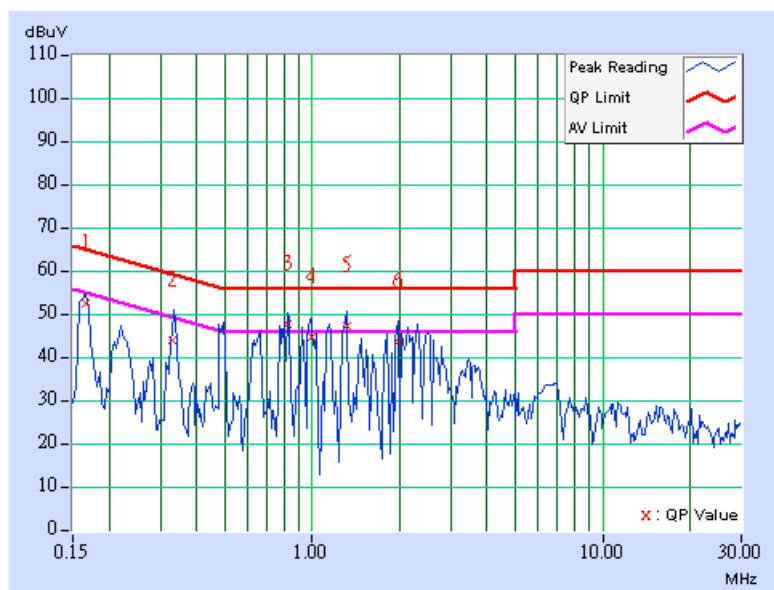

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	7.2Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 991hPa	TEST MODE	A
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.167	0.10	50.78	-	50.88	-	65.11	55.11	-14.23	-
2	0.222	0.10	40.30	-	40.40	-	62.75	52.75	-22.35	-
3	0.332	0.10	39.48	-	39.58	-	59.39	49.39	-19.81	-
4	0.829	0.18	43.54	-	43.72	-	56.00	46.00	-12.28	-
5	0.992	0.21	41.92	-	42.13	-	56.00	46.00	-13.87	-
6	1.158	0.21	43.07	-	43.28	-	56.00	46.00	-12.72	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

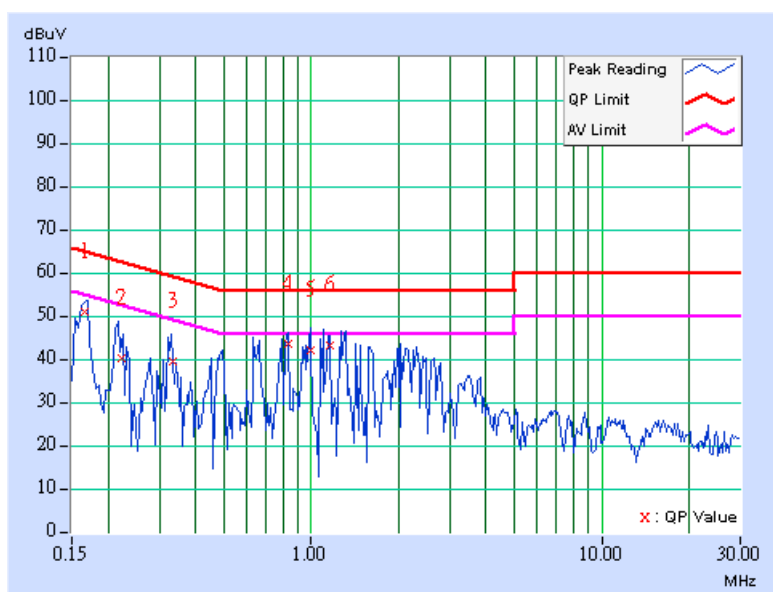

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	7.2Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 991hPa	TEST MODE	A
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.166	0.10	52.39	-	52.49	-	65.18	55.18	-12.69	-
2	0.331	0.10	43.94	-	44.04	-	59.43	49.43	-15.39	-
3	0.494	0.10	45.40	-	45.50	-	56.10	46.10	-10.60	-
4	0.826	0.11	46.84	41.83	46.95	41.94	56.00	46.00	-9.05	-4.06
5	1.329	0.15	45.06	-	45.21	-	56.00	46.00	-10.79	-
6	1.980	0.22	44.06	-	44.28	-	56.00	46.00	-11.72	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

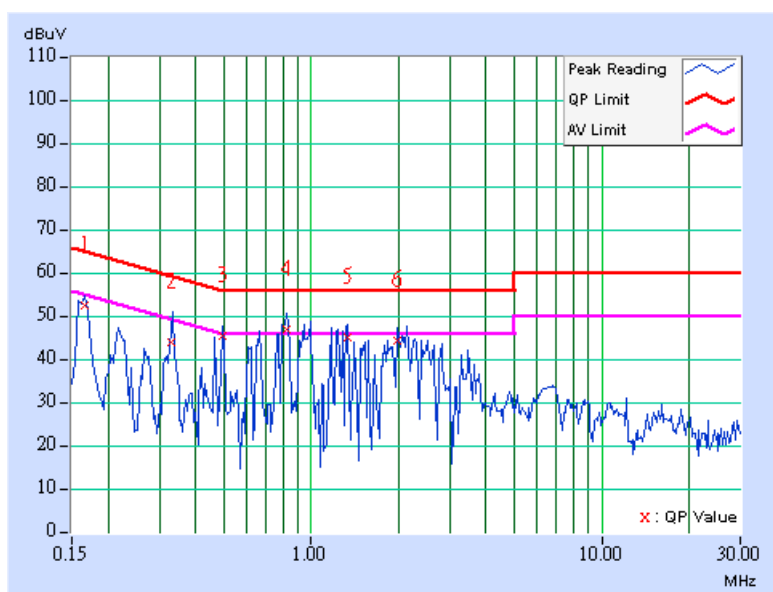

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	7.2Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 991hPa	TEST MODE	A
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.164	0.10	51.22	-	51.32	-	65.24	55.24	-13.92	-
2	0.331	0.10	39.36	-	39.46	-	59.42	49.42	-19.96	-
3	0.828	0.18	43.30	-	43.48	-	56.00	46.00	-12.52	-
4	0.992	0.21	42.17	-	42.38	-	56.00	46.00	-13.62	-
5	1.156	0.21	43.07	-	43.28	-	56.00	46.00	-12.72	-
6	1.329	0.21	44.09	-	44.30	-	56.00	46.00	-11.70	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

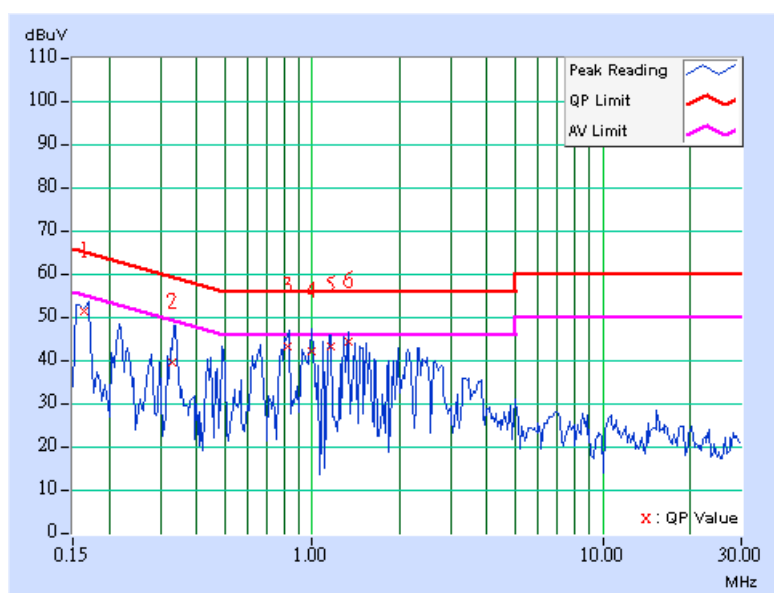

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	7.2Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.172	0.10	45.08	-	45.18	-	64.85	54.85	-19.67	-
2	0.257	0.10	41.09	-	41.19	-	61.54	51.54	-20.35	-
3	0.342	0.10	41.79	-	41.89	-	59.16	49.16	-17.27	-
4	1.793	0.20	41.61	-	41.81	-	56.00	46.00	-14.19	-
5	2.221	0.23	42.87	-	43.10	-	56.00	46.00	-12.90	-
6	2.651	0.24	42.19	-	42.43	-	56.00	46.00	-13.57	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

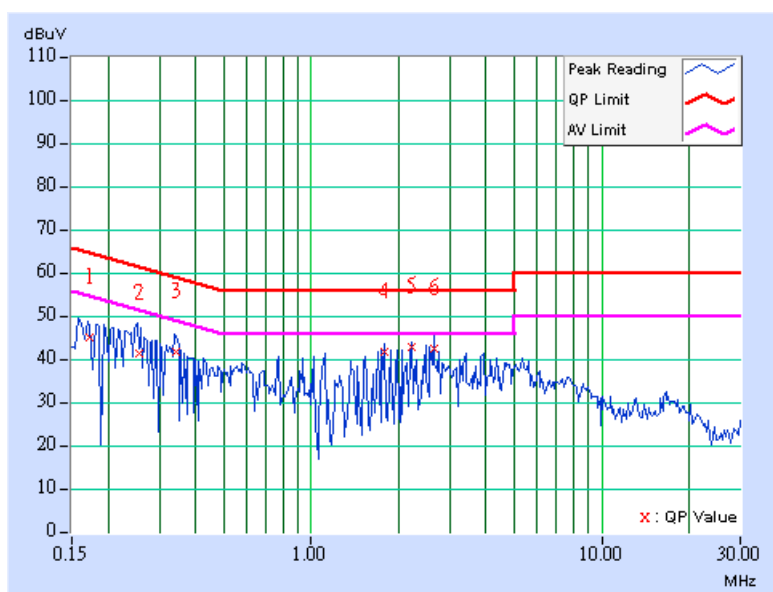

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	7.2Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.171	0.10	43.30	-	43.40	-	64.93	54.93	-21.53	-
2	0.258	0.10	40.13	-	40.23	-	61.49	51.49	-21.26	-
3	0.345	0.10	39.02	-	39.12	-	59.07	49.07	-19.95	-
4	0.431	0.11	33.50	-	33.61	-	57.23	47.23	-23.62	-
5	0.775	0.17	33.68	-	33.85	-	56.00	46.00	-22.15	-
6	2.569	0.24	34.59	-	34.83	-	56.00	46.00	-21.17	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

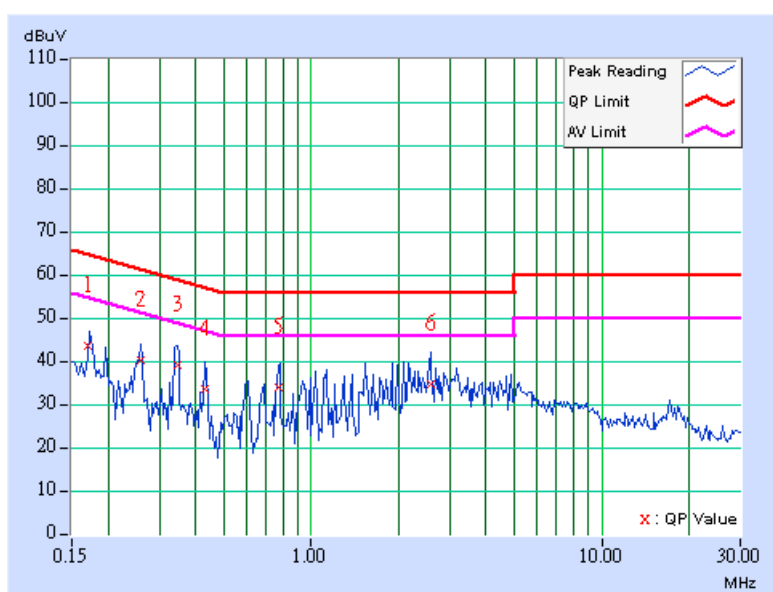

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	7.2Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.10	45.17	-	45.27	-	64.97	54.97	-19.70	-
2	0.257	0.10	41.33	-	41.43	-	61.54	51.54	-20.11	-
3	0.342	0.10	42.74	-	42.84	-	59.16	49.16	-16.32	-
4	1.364	0.15	41.53	-	41.68	-	56.00	46.00	-14.32	-
5	2.216	0.23	41.48	-	41.71	-	56.00	46.00	-14.29	-
6	2.833	0.24	36.37	-	36.61	-	56.00	46.00	-19.39	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

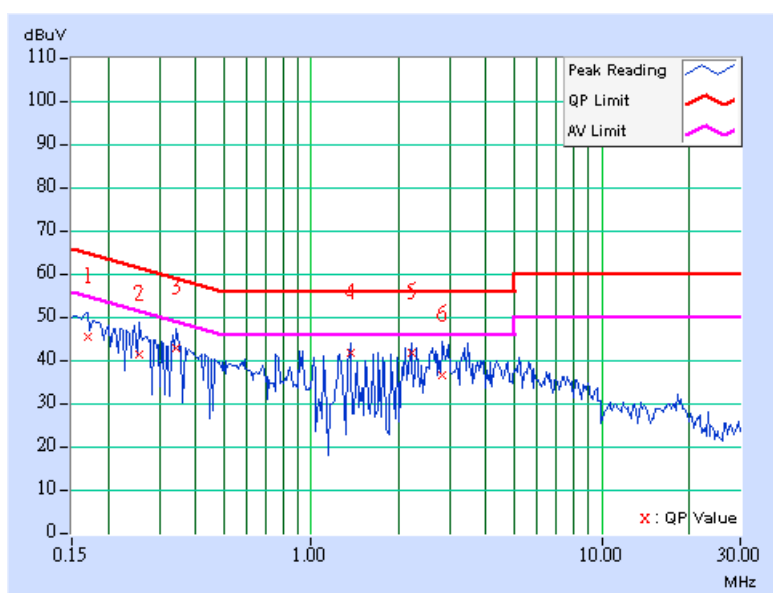

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	7.2Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.171	0.10	43.87	-	43.97	-	64.91	54.91	-20.94	-
2	0.257	0.10	40.92	-	41.02	-	61.54	51.54	-20.52	-
3	0.341	0.10	40.54	-	40.64	-	59.17	49.17	-18.53	-
4	0.599	0.14	33.67	-	33.81	-	56.00	46.00	-22.19	-
5	1.633	0.22	34.40	-	34.62	-	56.00	46.00	-21.38	-
6	2.488	0.23	35.11	-	35.34	-	56.00	46.00	-20.66	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

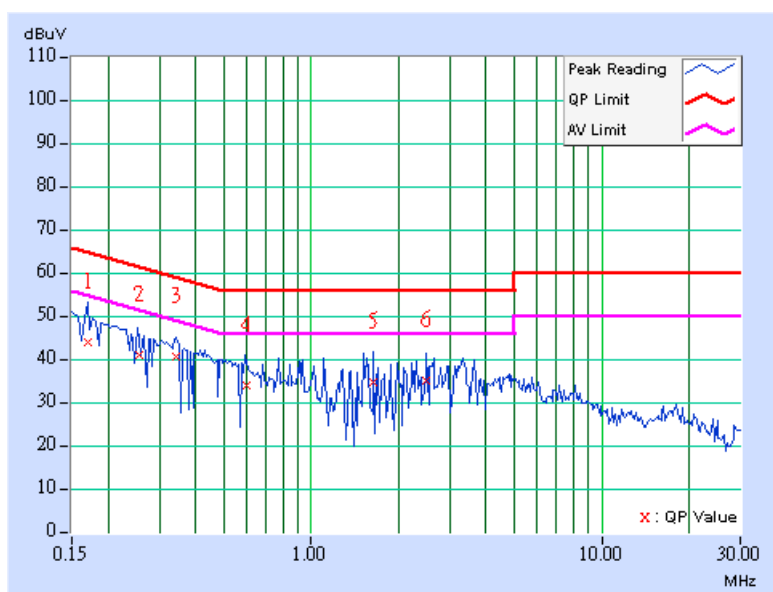

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	7.2Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.171	0.10	44.84	-	44.94	-	64.92	54.92	-19.98	-
2	0.257	0.10	40.94	-	41.04	-	61.53	51.53	-20.49	-
3	0.343	0.10	41.80	-	41.90	-	59.14	49.14	-17.24	-
4	0.935	0.11	39.11	-	39.22	-	56.00	46.00	-16.78	-
5	1.363	0.15	41.35	-	41.50	-	56.00	46.00	-14.50	-
6	2.215	0.23	40.91	-	41.14	-	56.00	46.00	-14.86	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

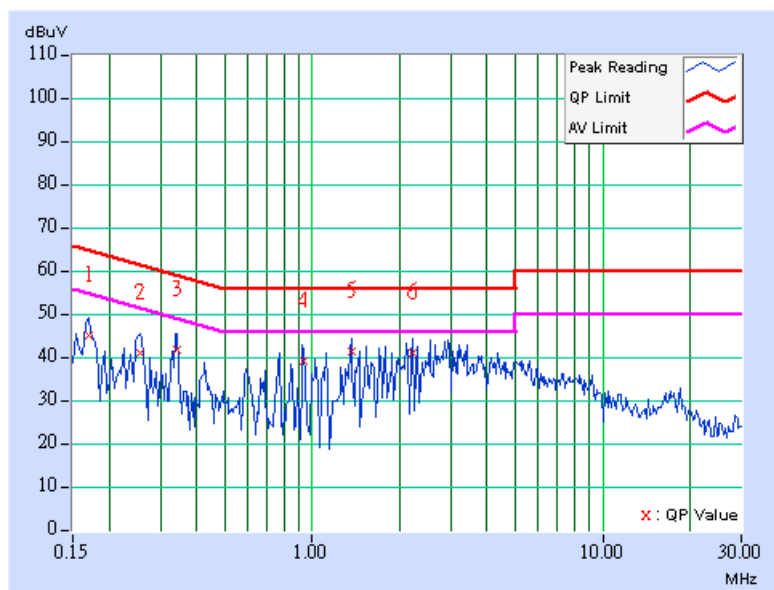

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	7.2Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.171	0.10	43.54	-	43.64	-	64.93	54.93	-21.29	-
2	0.255	0.10	40.44	-	40.54	-	61.58	51.58	-21.04	-
3	0.341	0.10	40.42	-	40.52	-	59.17	49.17	-18.65	-
4	0.598	0.14	33.53	-	33.67	-	56.00	46.00	-22.33	-
5	1.880	0.22	36.15	-	36.37	-	56.00	46.00	-19.63	-
6	2.402	0.23	34.44	-	34.67	-	56.00	46.00	-21.33	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

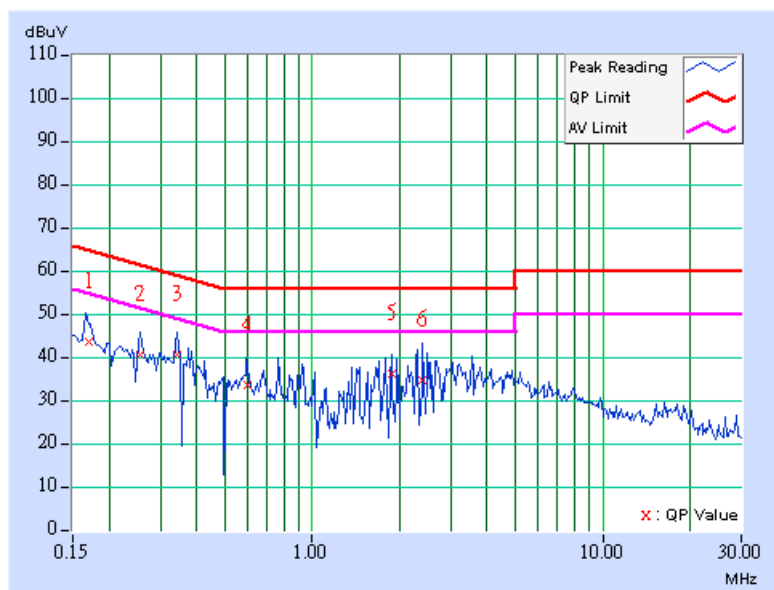


DRAFT 802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 991hPa	TEST MODE	A
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.166	0.10	52.47	-	52.57	-	65.18	55.18	-12.61	-
2	0.332	0.10	44.34	-	44.44	-	59.41	49.41	-14.97	-
3	0.825	0.11	47.51	42.03	47.62	42.14	56.00	46.00	-8.38	-3.86
4	0.990	0.11	45.04	-	45.15	-	56.00	46.00	-10.85	-
5	1.324	0.15	45.73	-	45.88	-	56.00	46.00	-10.12	-
6	2.313	0.23	42.37	-	42.60	-	56.00	46.00	-13.40	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

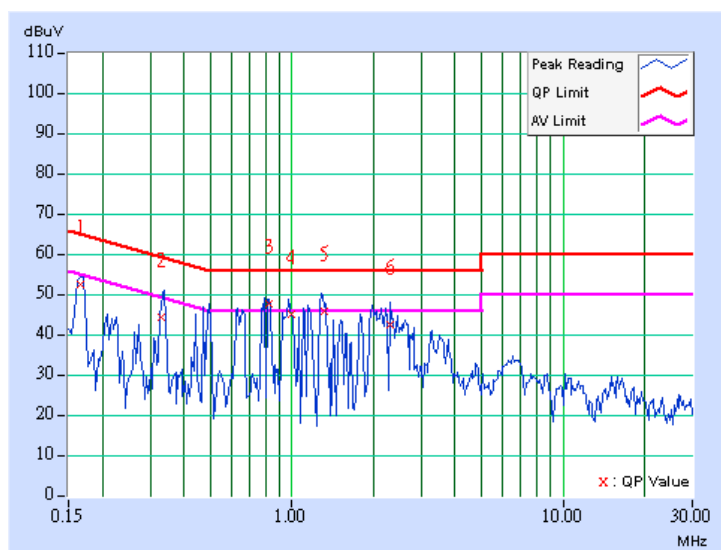

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 991hPa	TEST MODE	A
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.166	0.10	51.12	-	51.22	-	65.18	55.18	-13.96	-
2	0.332	0.10	39.45	-	39.55	-	59.39	49.39	-19.84	-
3	0.829	0.18	43.45	-	43.63	-	56.00	46.00	-12.37	-
4	0.994	0.21	42.32	-	42.53	-	56.00	46.00	-13.47	-
5	1.322	0.21	43.95	-	44.16	-	56.00	46.00	-11.84	-
6	1.992	0.22	40.29	-	40.51	-	56.00	46.00	-15.49	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

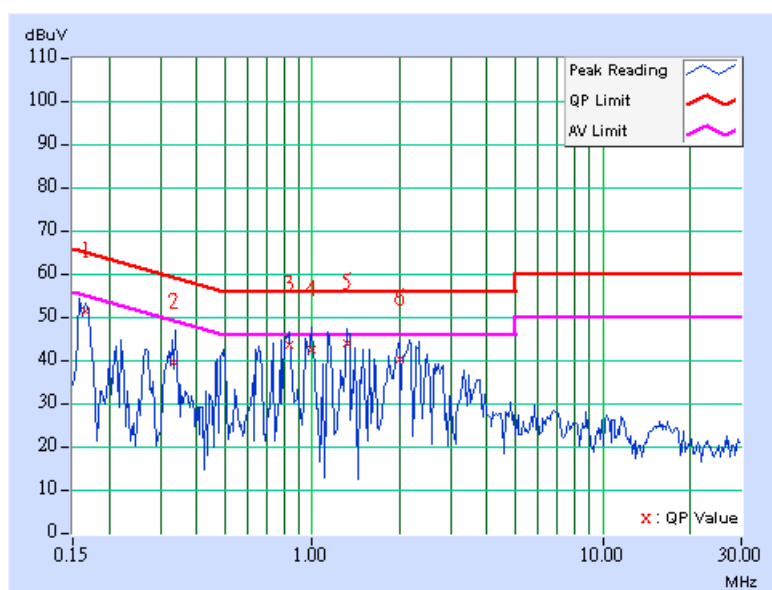

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 991hPa	TEST MODE	A
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.166	0.10	52.41	-	52.51	-	65.18	55.18	-12.67	-
2	0.332	0.10	44.18	-	44.28	-	59.41	49.41	-15.13	-
3	0.823	0.11	47.43	40.82	47.54	40.93	56.00	46.00	-8.46	-5.07
4	0.990	0.11	44.70	-	44.81	-	56.00	46.00	-11.19	-
5	1.320	0.15	46.22	39.01	46.37	39.16	56.00	46.00	-9.63	-6.84
6	1.976	0.22	44.41	-	44.63	-	56.00	46.00	-11.37	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

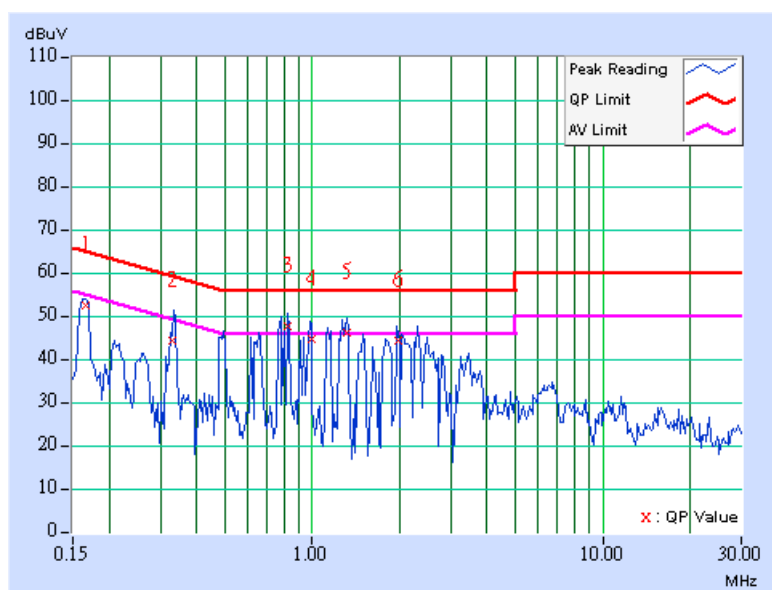

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 991hPa	TEST MODE	A
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.166	0.10	51.02	-	51.12	-	65.18	55.18	-14.06	-
2	0.331	0.10	39.57	-	39.67	-	59.43	49.43	-19.76	-
3	0.827	0.18	43.43	-	43.61	-	56.00	46.00	-12.39	-
4	0.994	0.21	42.48	-	42.69	-	56.00	46.00	-13.31	-
5	1.160	0.21	43.31	-	43.52	-	56.00	46.00	-12.48	-
6	1.322	0.21	43.95	-	44.16	-	56.00	46.00	-11.84	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

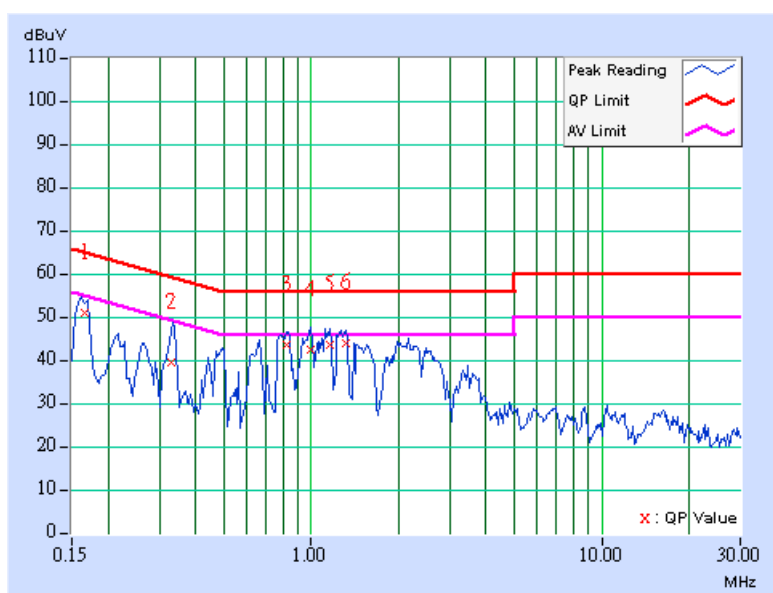

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 991hPa	TEST MODE	A
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.166	0.10	52.31	-	52.41	-	65.18	55.18	-12.77	-
2	0.330	0.10	44.12	-	44.22	-	59.44	49.44	-15.22	-
3	0.496	0.10	44.81	-	44.91	-	56.07	46.07	-11.16	-
4	0.825	0.11	47.13	41.90	47.24	42.01	56.00	46.00	-8.76	-3.99
5	1.321	0.15	46.06	38.82	46.21	38.97	56.00	46.00	-9.79	-7.03
6	1.977	0.22	44.37	-	44.59	-	56.00	46.00	-11.41	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

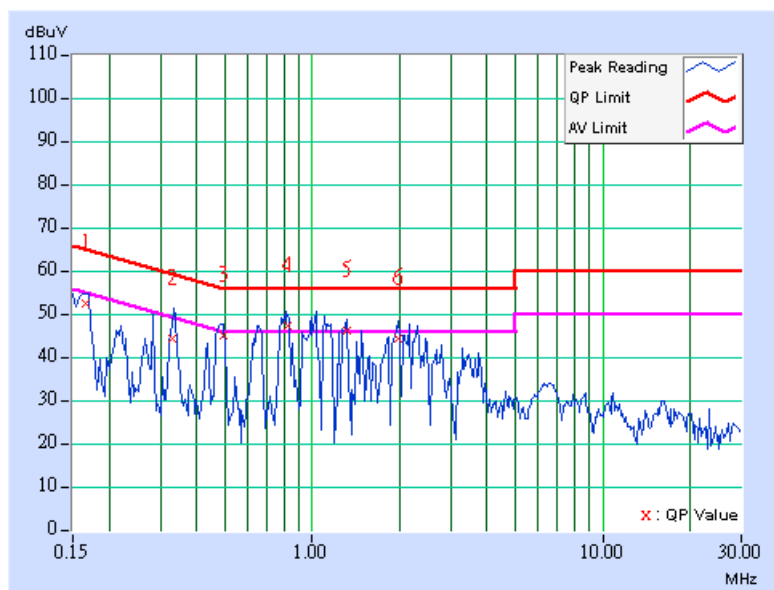

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 991hPa	TEST MODE	A
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.164	0.10	51.06	-	51.16	-	65.24	55.24	-14.08	-
2	0.329	0.10	39.45	-	39.55	-	59.49	49.49	-19.94	-
3	0.827	0.18	43.41	-	43.59	-	56.00	46.00	-12.41	-
4	0.995	0.21	42.37	-	42.58	-	56.00	46.00	-13.42	-
5	1.323	0.21	43.94	-	44.15	-	56.00	46.00	-11.85	-
6	1.989	0.22	40.51	-	40.73	-	56.00	46.00	-15.27	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

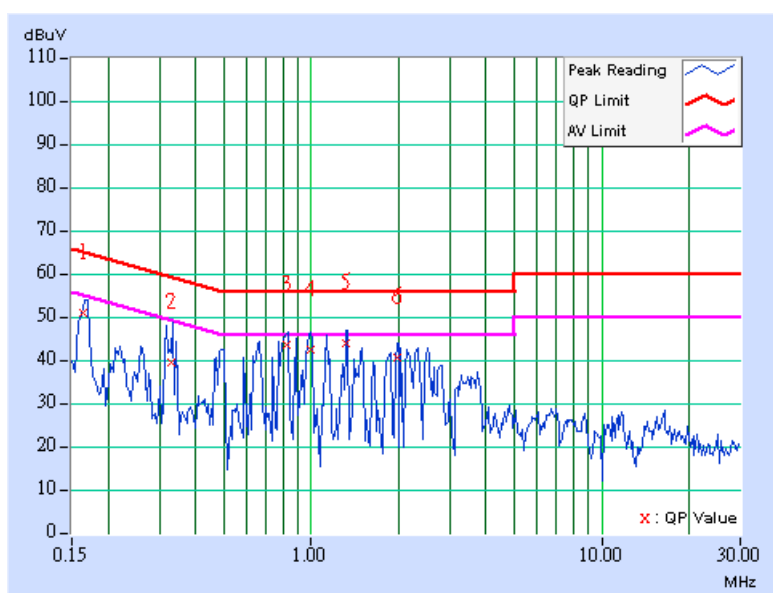

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.171	0.10	44.80	-	44.90	-	64.92	54.92	-20.02	-
2	0.257	0.10	41.98	-	42.08	-	61.54	51.54	-19.46	-
3	0.341	0.10	42.52	-	42.62	-	59.17	49.17	-16.55	-
4	0.936	0.11	39.11	-	39.22	-	56.00	46.00	-16.78	-
5	1.360	0.15	41.39	-	41.54	-	56.00	46.00	-14.46	-
6	2.210	0.23	40.93	-	41.16	-	56.00	46.00	-14.84	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

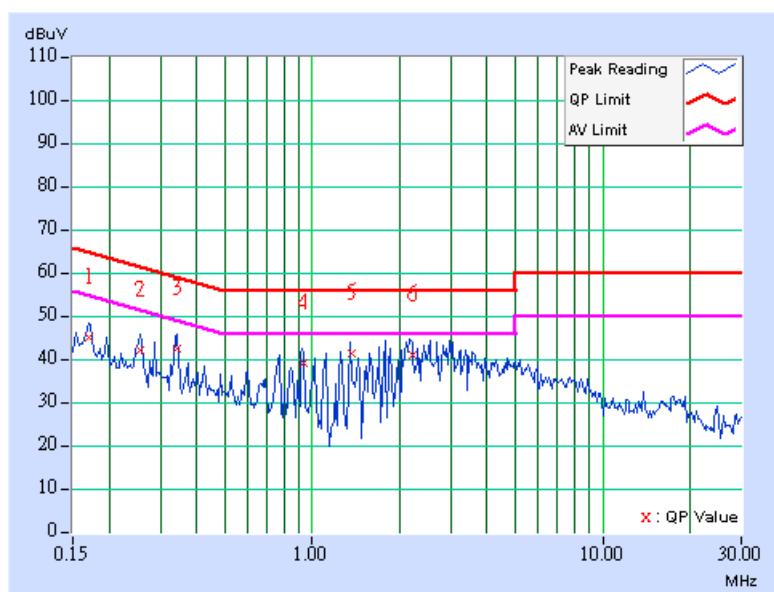

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.171	0.10	43.09	-	43.19	-	64.93	54.93	-21.74	-
2	0.256	0.10	40.41	-	40.51	-	61.55	51.55	-21.04	-
3	0.341	0.10	40.38	-	40.48	-	59.19	49.19	-18.71	-
4	0.770	0.17	35.78	-	35.95	-	56.00	46.00	-20.05	-
5	1.624	0.22	34.78	-	35.00	-	56.00	46.00	-21.00	-
6	2.055	0.22	34.41	-	34.63	-	56.00	46.00	-21.37	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

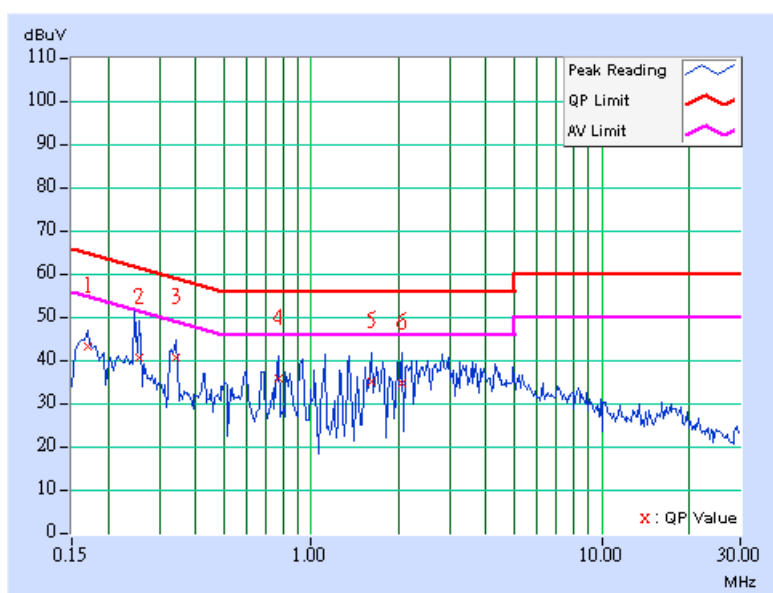

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.171	0.10	44.92	-	45.02	-	64.93	54.93	-19.91	-
2	0.256	0.10	42.91	-	43.01	-	61.56	51.56	-18.55	-
3	0.340	0.10	43.10	-	43.20	-	59.20	49.20	-16.00	-
4	1.362	0.15	41.45	-	41.60	-	56.00	46.00	-14.40	-
5	2.641	0.24	40.15	-	40.39	-	56.00	46.00	-15.61	-
6	2.973	0.25	40.60	-	40.85	-	56.00	46.00	-15.15	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

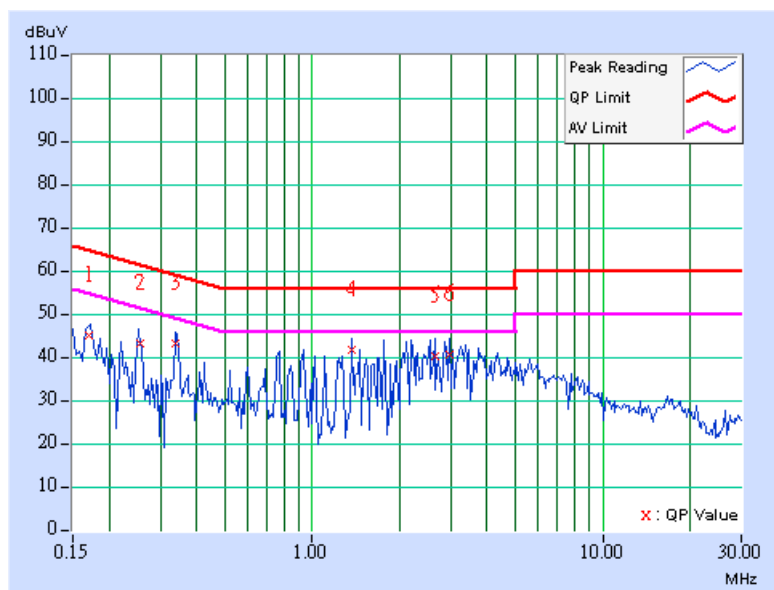

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.171	0.10	43.20	-	43.30	-	64.92	54.92	-21.62	-
2	0.255	0.10	40.57	-	40.67	-	61.58	51.58	-20.91	-
3	0.341	0.10	40.54	-	40.64	-	59.17	49.17	-18.53	-
4	1.110	0.21	35.82	-	36.03	-	56.00	46.00	-19.97	-
5	1.539	0.22	36.62	-	36.84	-	56.00	46.00	-19.16	-
6	2.473	0.23	30.72	-	30.95	-	56.00	46.00	-25.05	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

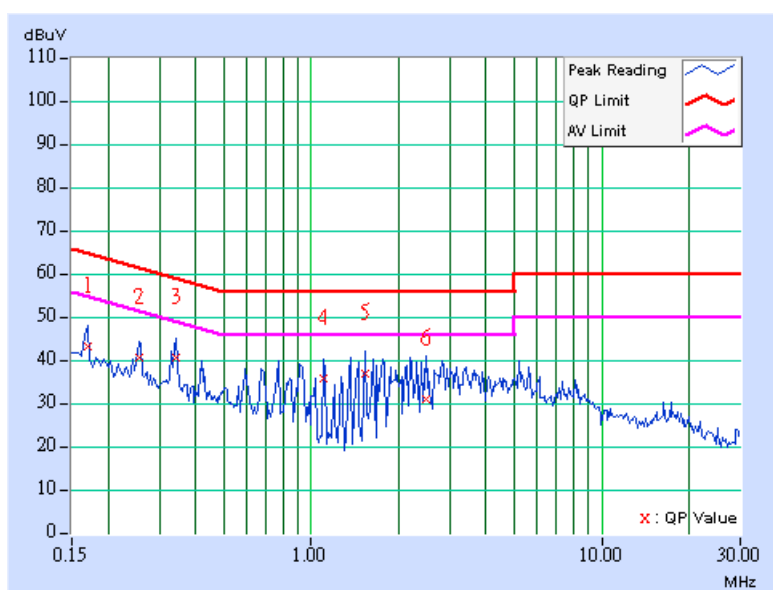

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.171	0.10	45.36	-	45.46	-	64.92	54.92	-19.46	-
2	0.255	0.10	42.93	-	43.03	-	61.58	51.58	-18.55	-
3	0.341	0.10	42.17	-	42.27	-	59.17	49.17	-16.90	-
4	1.359	0.15	41.51	-	41.66	-	56.00	46.00	-14.34	-
5	2.210	0.23	42.13	-	42.36	-	56.00	46.00	-13.64	-
6	2.973	0.25	41.43	-	41.68	-	56.00	46.00	-14.32	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

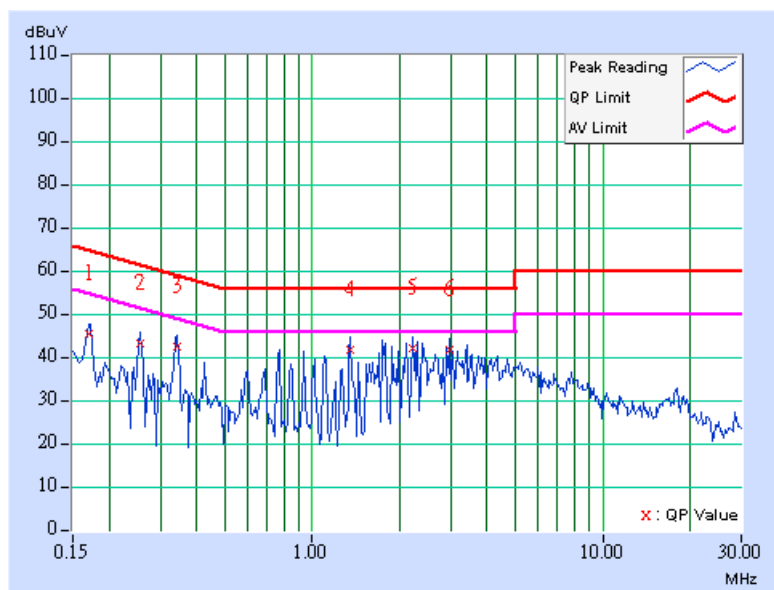

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.171	0.10	43.18	-	43.28	-	64.92	54.92	-21.64	-
2	0.255	0.10	40.63	-	40.73	-	61.58	51.58	-20.85	-
3	0.341	0.10	40.57	-	40.67	-	59.17	49.17	-18.50	-
4	0.770	0.17	35.94	-	36.11	-	56.00	46.00	-19.89	-
5	2.210	0.23	36.66	-	36.89	-	56.00	46.00	-19.11	-
6	2.820	0.24	36.57	-	36.81	-	56.00	46.00	-19.19	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

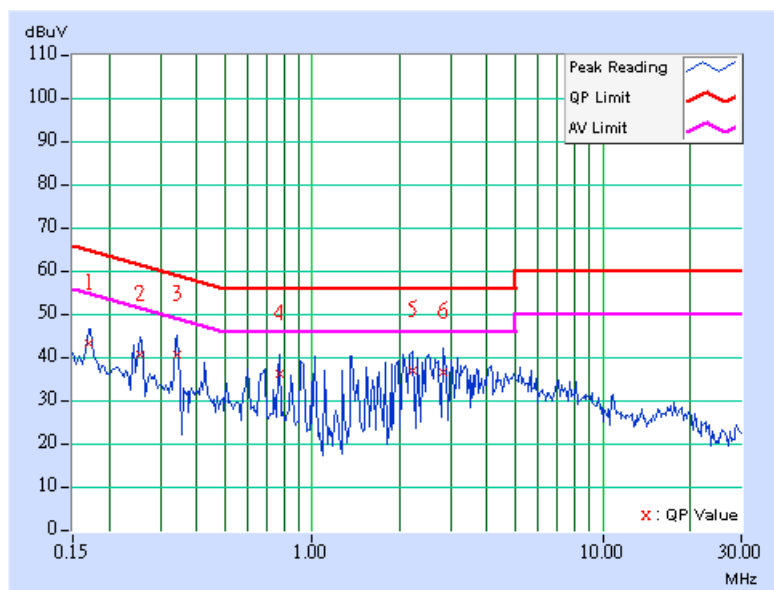

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400 / F(kHz)	300
0.490 ~ 1.705	24000 / F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Dec. 29, 2007
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Dec. 01, 2007
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Jan. 04, 2008
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-405	Dec. 18, 2007
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 16, 2008
Preamplifier Agilent	8449B	3008A1960	Oct. 30, 2007
Preamplifier Agilent	8447D	2944A10631	Oct. 30, 2007
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	230128/4	Nov. 14, 2007
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	233233/4	Nov. 14, 2007
Software ADT.	ADT_Radiated_V7.6	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA
Turn Table ADT.	TT100.	TT93021704	NA
Turn Table Controller ADT.	SC100.	SC93021704	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 4.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC3789B-4.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

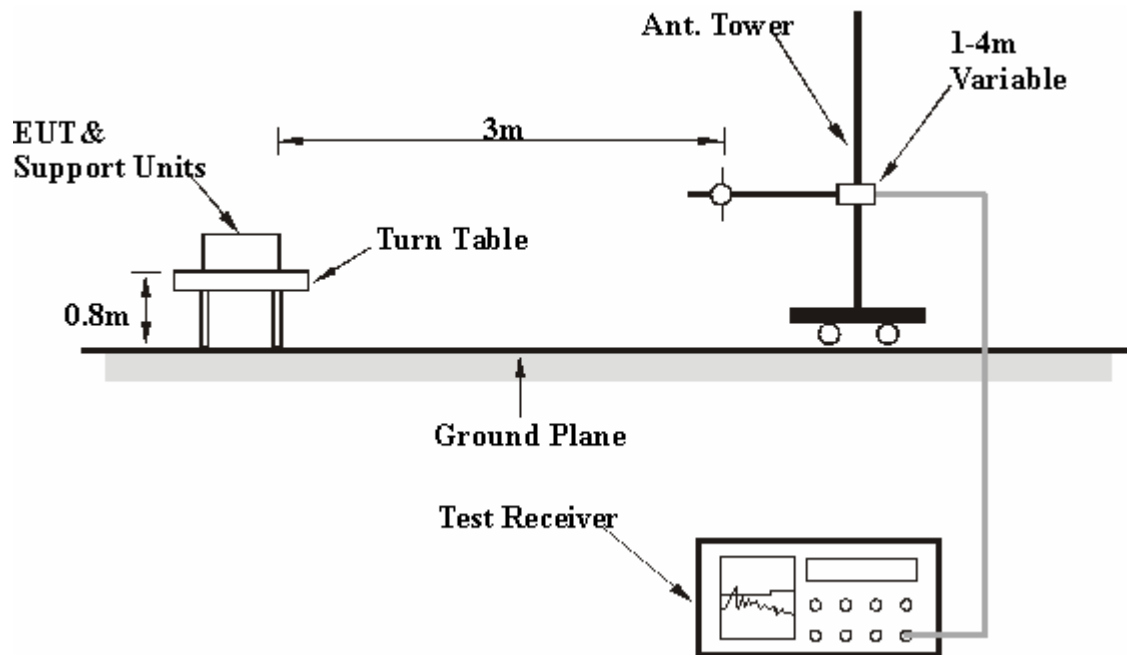

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA 802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK for 802.11g	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	6.0Mbps	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	21deg. C, 64% RH, 985hPa	TEST MODE	A
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	132.95	36.29 QP	43.50	-7.21	2.00 H	271	23.29	13.00
2	243.77	41.52 QP	46.00	-4.48	1.00 H	259	28.11	13.41
3	354.60	34.58 QP	46.00	-11.42	1.00 H	211	18.41	16.17
4	533.47	34.41 QP	46.00	-11.59	1.50 H	274	13.02	21.39
5	667.63	32.58 QP	46.00	-13.42	2.00 H	196	7.97	24.61
6	799.84	39.46 QP	46.00	-6.54	1.00 H	355	13.03	26.43

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	59.06	38.49 QP	40.00	-1.51	1.00 V	133	24.57	13.92
2	107.67	36.70 QP	43.50	-6.80	1.00 V	268	25.79	10.91
3	243.77	35.55 QP	46.00	-10.45	1.00 V	70	22.14	13.41
4	399.31	32.80 QP	46.00	-13.20	1.00 V	175	15.49	17.31
5	533.47	32.46 QP	46.00	-13.54	1.00 V	28	11.08	21.39
6	799.84	36.06 QP	46.00	-9.94	1.50 V	334	9.63	26.43

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK for 802.11g	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	6.0Mbps	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	21deg. C, 64% RH, 985hPa	TEST MODE	B
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	132.95	34.45 QP	43.50	-9.05	1.50 H	274	21.44	13.00
2	241.83	38.70 QP	46.00	-7.30	1.00 H	238	25.38	13.32
3	354.60	30.70 QP	46.00	-15.30	1.00 H	10	14.53	16.17
4	399.31	31.54 QP	46.00	-14.46	1.00 H	133	14.23	17.31
5	533.47	34.03 QP	46.00	-11.97	1.50 H	145	12.64	21.39
6	805.67	35.62 QP	46.00	-10.38	1.50 H	10	9.11	26.51

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	55.18	39.15 QP	40.00	-0.85	1.00 V	58	25.07	14.08
2	78.51	35.99 QP	40.00	-4.01	1.00 V	82	24.71	11.28
3	243.77	37.62 QP	46.00	-8.38	1.00 V	187	24.21	13.41
4	354.60	30.55 QP	46.00	-15.45	1.50 V	64	14.38	16.17
5	533.47	32.58 QP	46.00	-13.42	1.00 V	166	11.19	21.39
6	799.84	35.27 QP	46.00	-10.73	1.50 V	319	8.84	26.43

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

DRAFT 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	7.2Mbps	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 985hPa	TEST MODE	A
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	132.91	36.08 QP	43.50	-7.42	1.50 H	266	23.08	13.00
2	241.90	41.50 QP	46.00	-4.50	1.50 H	182	28.18	13.32
3	377.67	37.38 QP	46.00	-8.62	1.00 H	20	20.62	16.76
4	533.52	35.10 QP	46.00	-10.90	1.00 H	66	13.71	21.39
5	799.78	40.17 QP	46.00	-5.83	1.00 H	313	13.74	26.43
6	902.95	37.99 QP	46.00	-8.01	1.50 H	225	10.00	27.99

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	47.72	38.47 QP	40.00	-1.53	1.00 V	77	24.75	13.72
2	146.51	35.75 QP	43.50	-7.75	1.58 V	356	21.38	14.37
3	241.88	39.13 QP	46.00	-6.87	2.00 V	169	25.81	13.32
4	533.41	33.84 QP	46.00	-12.16	1.00 V	203	12.45	21.39
5	799.96	38.41 QP	46.00	-7.59	1.50 V	338	11.98	26.43
6	933.88	34.54 QP	46.00	-11.46	1.50 V	122	6.20	28.34

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	7.2Mbps	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 985hPa	TEST MODE	B
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	132.95	36.15 QP	43.50	-7.35	1.50 H	274	23.15	13.00
2	241.83	41.56 QP	46.00	-4.44	1.50 H	178	28.25	13.32
3	377.93	37.32 QP	46.00	-8.68	1.00 H	10	20.55	16.77
4	533.47	35.01 QP	46.00	-10.99	1.50 H	58	13.62	21.39
5	799.84	40.26 QP	46.00	-5.74	1.00 H	307	13.84	26.43
6	902.89	38.08 QP	46.00	-7.92	1.50 H	214	10.09	27.99

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	47.78	38.62 QP	40.00	-1.38	1.01 V	64	24.88	13.74
2	146.56	35.79 QP	43.50	-7.71	1.50 V	4	21.42	14.38
3	241.83	39.21 QP	46.00	-6.79	2.00 V	157	25.89	13.32
4	533.47	33.79 QP	46.00	-12.21	1.00 V	190	12.40	21.39
5	799.84	38.35 QP	46.00	-7.65	1.50 V	346	11.92	26.43
6	933.99	34.46 QP	46.00	-11.54	2.00 V	130	6.13	28.34

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

DRAFT 802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	15.0Mbps	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 985hPa	TEST MODE	A
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	132.90	37.91 QP	43.50	-5.59	1.50 H	268	24.91	13.00
2	243.80	38.59 QP	46.00	-7.41	1.00 H	309	25.18	13.41
3	267.06	35.36 QP	46.00	-10.64	1.00 H	112	21.30	14.06
4	533.40	35.45 QP	46.00	-10.55	1.50 H	158	14.06	21.39
5	776.60	37.19 QP	46.00	-8.81	1.00 H	357	11.04	26.15
6	933.93	33.00 QP	46.00	-13.00	1.50 H	346	4.66	28.34

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	47.47	38.63 QP	40.00	-1.37	1.04 V	335	24.97	13.66
2	146.60	35.64 QP	43.50	-7.86	1.00 V	16	21.26	14.38
3	239.94	36.97 QP	46.00	-9.03	1.00 V	194	23.74	13.23
4	533.51	33.96 QP	46.00	-12.04	1.50 V	314	12.57	21.39
5	799.94	35.94 QP	46.00	-10.06	1.50 V	335	9.51	26.43
6	902.95	37.36 QP	46.00	-8.64	1.50 V	31	9.37	27.99

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	15.0Mbps	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 985hPa	TEST MODE	B
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	132.95	37.96 QP	43.50	-5.54	1.50 H	262	24.96	13.00
2	243.77	38.50 QP	46.00	-7.50	1.00 H	298	25.09	13.41
3	267.10	35.43 QP	46.00	-10.57	1.00 H	103	21.37	14.06
4	533.47	35.52 QP	46.00	-10.48	1.50 H	148	14.13	21.39
5	776.51	37.11 QP	46.00	-8.89	1.00 H	10	10.96	26.15
6	933.99	33.07 QP	46.00	-12.93	1.50 H	340	4.74	28.34

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	47.40	38.84 QP	40.00	-1.16	1.00 V	340	25.20	13.64
2	146.56	35.59 QP	43.50	-7.91	1.00 V	10	21.21	14.38
3	239.88	37.02 QP	46.00	-8.98	1.00 V	208	23.79	13.23
4	533.47	34.03 QP	46.00	-11.97	1.50 V	325	12.64	21.39
5	799.84	35.89 QP	46.00	-10.11	1.50 V	325	9.46	26.43
6	902.89	37.28 QP	46.00	-8.72	1.00 V	22	9.29	27.99

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	1.0Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 68% RH, 985hPa	TEST MODE	A
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.00	54.56 PK	74.00	-19.44	1.00 H	26	22.35	32.21
2	2386.00	42.06 AV	54.00	-11.94	1.00 H	26	9.85	32.21
3	*2412.00	101.95 PK			1.06 H	188	69.63	32.32
4	*2412.00	97.87 AV			1.06 H	188	65.55	32.32
5	4824.00	49.24 PK	74.00	-24.76	1.45 H	340	10.75	38.49
6	4824.00	44.59 AV	54.00	-9.41	1.45 H	340	6.10	38.49

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2347.00	63.31 PK	74.00	-10.69	1.25 V	26	31.25	32.06
2	2347.00	51.04 AV	54.00	-2.96	1.25 V	26	18.98	32.06
3	2386.00	64.89 PK	74.00	-9.11	1.16 V	29	32.68	32.21
4	2386.00	52.76 AV	54.00	-1.24	1.16 V	29	20.55	32.21
5	*2412.00	111.55 PK			1.18 V	36	79.23	32.32
6	*2412.00	107.44 AV			1.18 V	36	75.12	32.32
7	4824.00	54.68 PK	74.00	-19.32	1.60 V	350	16.19	38.49
8	4824.00	50.13 AV	54.00	-3.87	1.60 V	350	11.64	38.49

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	1.0Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 66% RH, 985hPa	TEST MODE	A
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.12 PK			1.03 H	169	70.71	32.41
2	*2437.00	99.02 AV			1.03 H	169	66.61	32.41
3	2499.00	54.11 PK	74.00	-19.89	1.00 H	35	21.46	32.65
4	2499.00	41.76 AV	54.00	-12.24	1.00 H	35	9.11	32.65
5	4874.00	49.09 PK	74.00	-24.91	1.39 H	345	10.40	38.69
6	4874.00	44.23 AV	54.00	-9.77	1.39 H	345	5.54	38.69

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2373.00	62.36 PK	74.00	-11.64	1.15 V	22	30.20	32.16
2	2373.00	50.95 AV	54.00	-3.05	1.15 V	22	18.79	32.16
3	*2437.00	112.91 PK			1.15 V	27	80.50	32.41
4	*2437.00	108.71 AV			1.15 V	27	76.30	32.41
5	2499.00	64.87 PK	74.00	-9.13	1.13 V	35	32.22	32.65
6	2499.00	51.85 AV	54.00	-2.15	1.13 V	35	19.20	32.65
7	4874.00	54.18 PK	74.00	-19.82	1.57 V	350	15.49	38.69
8	4874.00	49.89 AV	54.00	-4.11	1.57 V	350	11.20	38.69

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	1.0Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 68% RH, 985hPa	TEST MODE	A
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.13 PK			1.04 H	169	69.62	32.51
2	*2462.00	98.95 AV			1.04 H	169	66.44	32.51
3	2488.00	54.19 PK	74.00	-19.81	1.00 H	33	21.59	32.60
4	2488.00	41.85 AV	54.00	-12.15	1.00 H	33	9.25	32.60
5	4924.00	48.98 PK	74.00	-25.02	1.37 H	342	10.13	38.85
6	4924.00	44.15 AV	54.00	-9.85	1.37 H	342	5.30	38.85

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.89 PK			1.19 V	24	79.38	32.51
2	*2462.00	107.93 AV			1.19 V	24	75.42	32.51
3	2488.00	64.55 PK	74.00	-9.45	1.08 V	35	31.95	32.60
4	2488.00	52.43 AV	54.00	-1.57	1.08 V	35	19.83	32.60
5	4924.00	54.25 PK	74.00	-19.75	1.52 V	346	15.40	38.85
6	4924.00	49.32 AV	54.00	-4.68	1.52 V	346	10.47	38.85

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.

802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	6.0Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 68% RH, 985hPa	TEST MODE	A
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.35 PK	74.00	-12.65	1.00 H	349	29.12	32.23
2	2390.00	42.52 AV	54.00	-11.48	1.00 H	349	10.29	32.23
3	*2412.00	101.13 PK			1.00 H	352	68.81	32.32
4	*2412.00	91.05 AV			1.00 H	352	58.73	32.32
5	4824.00	45.89 PK	74.00	-28.11	1.08 H	35	7.40	38.49
6	4824.00	38.25 AV	54.00	-15.75	1.08 H	35	-0.24	38.49

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.85 PK	74.00	-1.15	1.14 V	336	40.62	32.23
2	2390.00	52.89 AV	54.00	-1.11	1.14 V	336	20.66	32.23
3	*2412.00	110.88 PK			1.15 V	321	78.56	32.32
4	*2412.00	100.47 AV			1.15 V	321	68.15	32.32
5	4824.00	47.94 PK	74.00	-26.06	1.46 V	36	9.45	38.49
6	4824.00	40.19 AV	54.00	-13.81	1.46 V	36	1.70	38.49

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	6.0Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 68% RH, 985hPa	TEST MODE	A
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2385.00	60.98 PK	74.00	-13.02	1.00 H	352	28.77	32.21
2	2385.00	42.13 AV	54.00	-11.87	1.00 H	352	9.92	32.21
3	*2437.00	103.25 PK			1.00 H	349	70.84	32.41
4	*2437.00	93.11 AV			1.00 H	349	60.70	32.41
5	4874.00	47.98 PK	74.00	-26.02	1.05 H	26	9.29	38.69
6	4874.00	40.16 AV	54.00	-13.84	1.05 H	26	1.47	38.69

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2385.00	70.01 PK	74.00	-3.99	1.13 V	325	37.80	32.21
2	2385.00	51.02 AV	54.00	-2.98	1.13 V	325	18.81	32.21
3	*2437.00	112.97 PK			1.13 V	316	80.56	32.41
4	*2437.00	102.53 AV			1.13 V	316	70.12	32.41
5	2492.00	68.52 PK	92.97	-24.45	1.11 V	318	35.90	32.62
6	2492.00	49.92 AV	82.53	-32.61	1.11 V	318	17.30	32.62
7	4874.00	49.98 PK	74.00	-24.02	1.53 V	39	11.29	38.69
8	4874.00	42.25 AV	54.00	-11.75	1.53 V	39	3.56	38.69

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	6.0Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 68% RH, 985hPa	TEST MODE	A
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.32 PK			1.00 H	346	68.81	32.51
2	*2462.00	91.39 AV			1.00 H	346	58.88	32.51
3	2483.50	61.02 PK	74.00	-12.98	1.00 H	352	28.43	32.59
4	2483.50	42.23 AV	54.00	-11.77	1.00 H	352	9.64	32.59
5	4924.00	45.26 PK	74.00	-28.74	1.07 H	42	6.41	38.85
6	4924.00	38.03 AV	54.00	-15.97	1.07 H	42	-0.82	38.85

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.98 PK			1.18 V	337	78.47	32.51
2	*2462.00	100.59 AV			1.18 V	337	68.08	32.51
3	2483.50	72.43 PK	74.00	-1.57	1.09 V	330	39.84	32.59
4	2483.50	52.39 AV	54.00	-1.61	1.09 V	330	19.80	32.59
5	4924.00	47.76 PK	74.00	-26.24	1.37 V	21	8.91	38.85
6	4924.00	40.02 AV	54.00	-13.98	1.37 V	21	1.17	38.85

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.

DRAFT 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	7.2Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 985hPa	TEST MODE	A
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.97 PK	74.00	-13.03	1.48 H	59	28.74	32.23
2	2390.00	47.52 AV	54.00	-6.48	1.48 H	59	15.29	32.23
3	*2412.00	104.42 PK			1.45 H	71	72.10	32.32
4	*2412.00	91.77 AV			1.45 H	71	59.45	32.32
5	4824.00	47.70 PK	74.00	-26.30	1.05 H	27	9.21	38.49
6	4824.00	35.33 AV	54.00	-18.67	1.05 H	27	-3.16	38.49

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.26 PK	74.00	-7.74	1.23 V	156	34.03	32.23
2	2390.00	52.00 AV	54.00	-2.00	1.23 V	156	19.77	32.23
3	*2412.00	110.40 PK			1.25 V	221	78.08	32.32
4	*2412.00	98.32 AV			1.25 V	221	66.00	32.32
5	4824.00	48.78 PK	74.00	-25.22	1.42 V	174	10.29	38.49
6	4824.00	35.63 AV	54.00	-18.37	1.42 V	174	-2.86	38.49

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. " * ": Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	7.2Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 985hPa	TEST MODE	A
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.67 PK			1.41 H	57	71.26	32.41
2	*2437.00	91.28 AV			1.41 H	57	58.87	32.41
3	4874.00	46.93 PK	74.00	-27.07	1.06 H	31	8.24	38.69
4	4874.00	34.53 AV	54.00	-19.47	1.06 H	31	-4.16	38.69

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	110.33 PK			1.17 V	119	77.92	32.41
2	*2437.00	98.01 AV			1.17 V	119	65.60	32.41
3	4874.00	47.58 PK	74.00	-26.42	1.01 V	205	8.89	38.69
4	4874.00	35.14 AV	54.00	-18.86	1.01 V	205	-3.55	38.69

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	7.2Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 985hPa	TEST MODE	A
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.32 PK			1.16 H	5	69.81	32.51
2	*2462.00	89.72 AV			1.16 H	5	57.21	32.51
3	2483.50	57.94 PK	74.00	-16.06	1.13 H	4	25.35	32.59
4	2483.50	46.09 AV	54.00	-7.91	1.13 H	4	13.50	32.59
5	4924.00	47.88 PK	74.00	-26.12	1.03 H	358	9.03	38.85
6	4924.00	35.52 AV	54.00	-18.48	1.03 H	358	-3.33	38.85

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.68 PK			1.25 V	32	78.17	32.51
2	*2462.00	98.61 AV			1.25 V	32	66.10	32.51
3	2483.50	66.75 PK	74.00	-7.25	1.25 V	26	34.16	32.59
4	2483.50	51.39 AV	54.00	-2.61	1.25 V	26	18.80	32.59
5	4924.00	49.04 PK	74.00	-24.96	1.05 V	84	10.19	38.85
6	4924.00	36.09 AV	54.00	-17.91	1.05 V	84	-2.76	38.85

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.



DRAFT 802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	15.0Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 985hPa	TEST MODE	A
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.84 PK	74.00	-17.16	1.17 H	223	24.61	32.23
2	2390.00	45.69 AV	54.00	-8.31	1.17 H	223	13.46	32.23
3	*2422.00	99.51 PK			1.45 H	70	67.16	32.35
4	*2422.00	86.83 AV			1.45 H	70	54.48	32.35
5	4844.00	47.36 PK	74.00	-26.64	1.09 H	167	8.79	38.57
6	4844.00	34.41 AV	54.00	-19.59	1.09 H	167	-4.16	38.57

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.75 PK	74.00	-9.25	1.58 V	186	32.52	32.23
2	2390.00	52.57 AV	54.00	-1.43	1.58 V	186	20.34	32.23
3	*2422.00	107.16 PK			1.00 V	285	74.81	32.35
4	*2422.00	94.21 AV			1.00 V	285	61.86	32.35
5	4844.00	48.56 PK	74.00	-25.44	1.21 V	65	9.99	38.57
6	4844.00	34.41 AV	54.00	-19.59	1.21 V	65	-4.16	38.57

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. " * ": Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	15.0Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 985hPa	TEST MODE	A
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	101.42 PK			1.42 H	59	69.01	32.41
2	*2437.00	89.09 AV			1.42 H	59	56.68	32.41
3	4874.00	47.58 PK	74.00	-26.42	1.10 H	116	8.89	38.69
4	4874.00	35.33 AV	54.00	-18.67	1.10 H	116	-3.36	38.69

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	107.74 PK			1.47 V	133	75.33	32.41
2	*2437.00	95.25 AV			1.47 V	133	62.84	32.41
3	4874.00	46.78 PK	74.00	-27.22	1.05 V	356	8.09	38.69
4	4874.00	34.94 AV	54.00	-19.06	1.05 V	356	-3.75	38.69

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	15.0Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 67% RH, 985hPa	TEST MODE	A
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	101.66 PK			1.42 H	59	69.19	32.47
2	*2452.00	89.37 AV			1.42 H	59	55.90	32.47
3	2483.50	59.79 PK	74.00	-14.21	1.08 H	54	27.20	32.59
4	2483.50	47.58 AV	54.00	-6.42	1.08 H	54	14.99	32.59
5	4904.00	47.17 PK	74.00	-26.83	1.13 H	174	8.36	38.81
6	4904.00	35.46 AV	54.00	-18.54	1.13 H	174	-3.35	38.81

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	107.95 PK			1.50 V	89	75.79	32.47
2	*2452.00	95.36 AV			1.50 V	89	62.78	32.47
3	2483.50	64.25 PK	74.00	-9.75	1.54 V	13	31.66	32.59
4	2483.50	51.49 AV	54.00	-2.51	1.54 V	13	18.90	32.59
5	4904.00	47.52 PK	74.00	-26.48	1.08 V	252	8.71	38.81
6	4904.00	35.55 AV	54.00	-18.45	1.08 V	252	-3.26	38.81

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP40	100040	Jun. 28, 2008

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

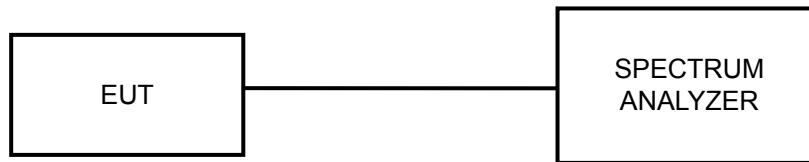

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 TEST RESULTS

802.11b DSSS MODULATION


MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 65% RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	12.20	0.5	PASS
6	2437	12.16	0.5	PASS
11	2462	12.16	0.5	PASS


CH 1

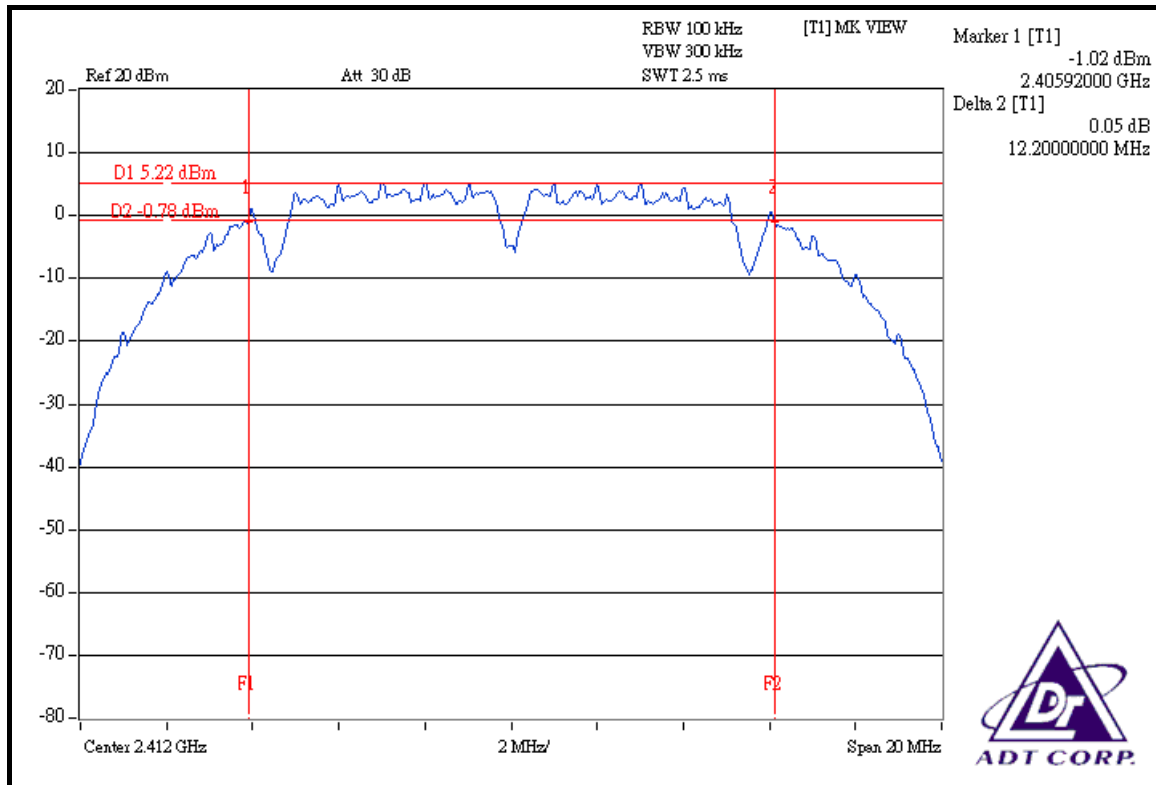

CH 6

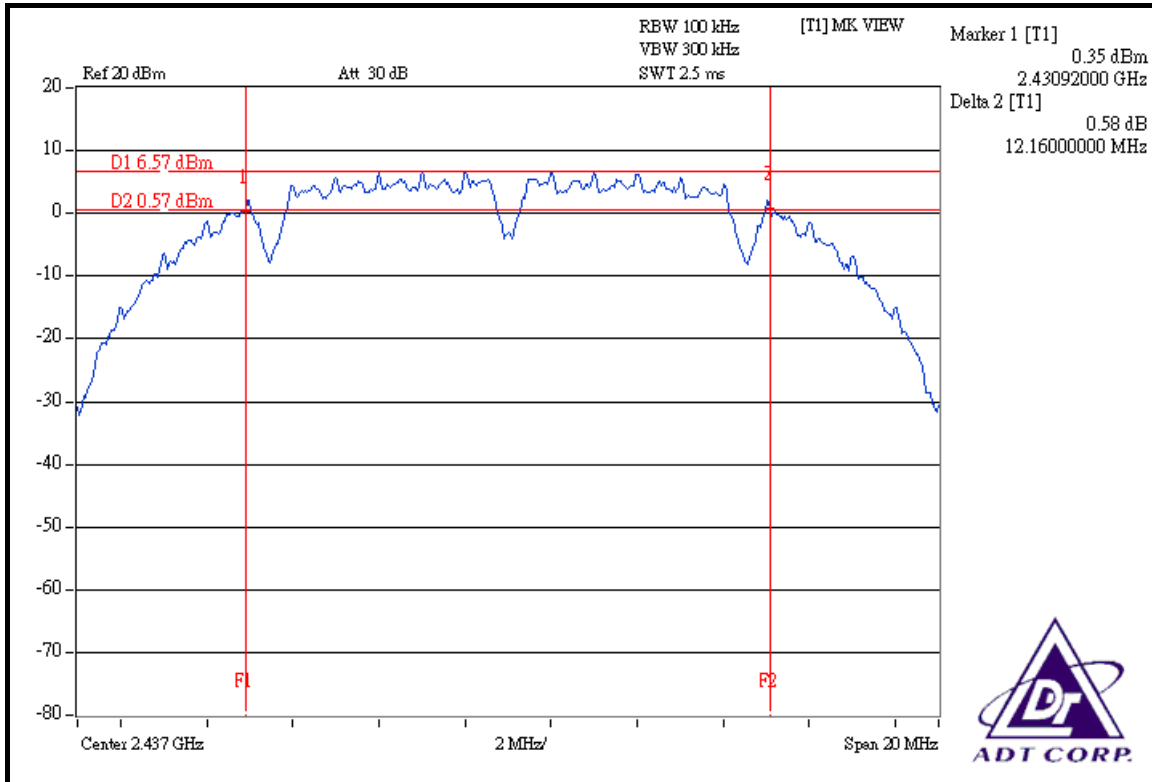

CH 11

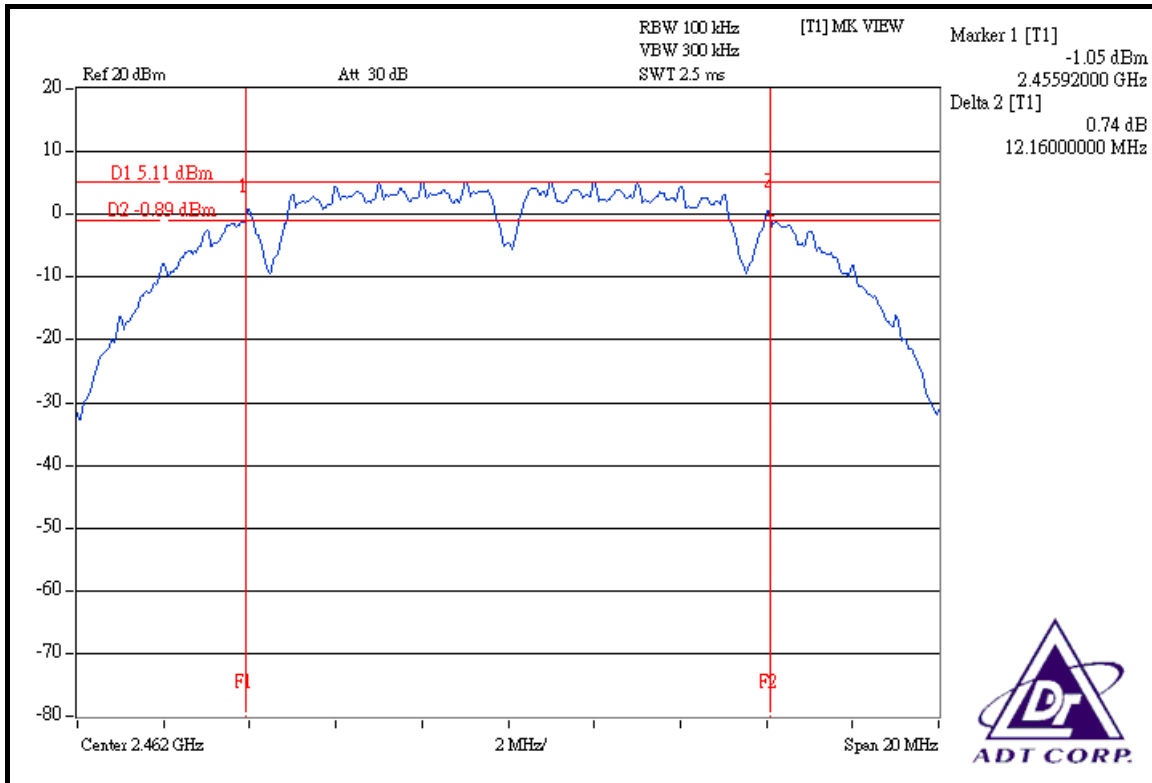




802.11g OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 65% RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.60	0.5	PASS
6	2437	16.60	0.5	PASS
11	2462	16.64	0.5	PASS


CH 1

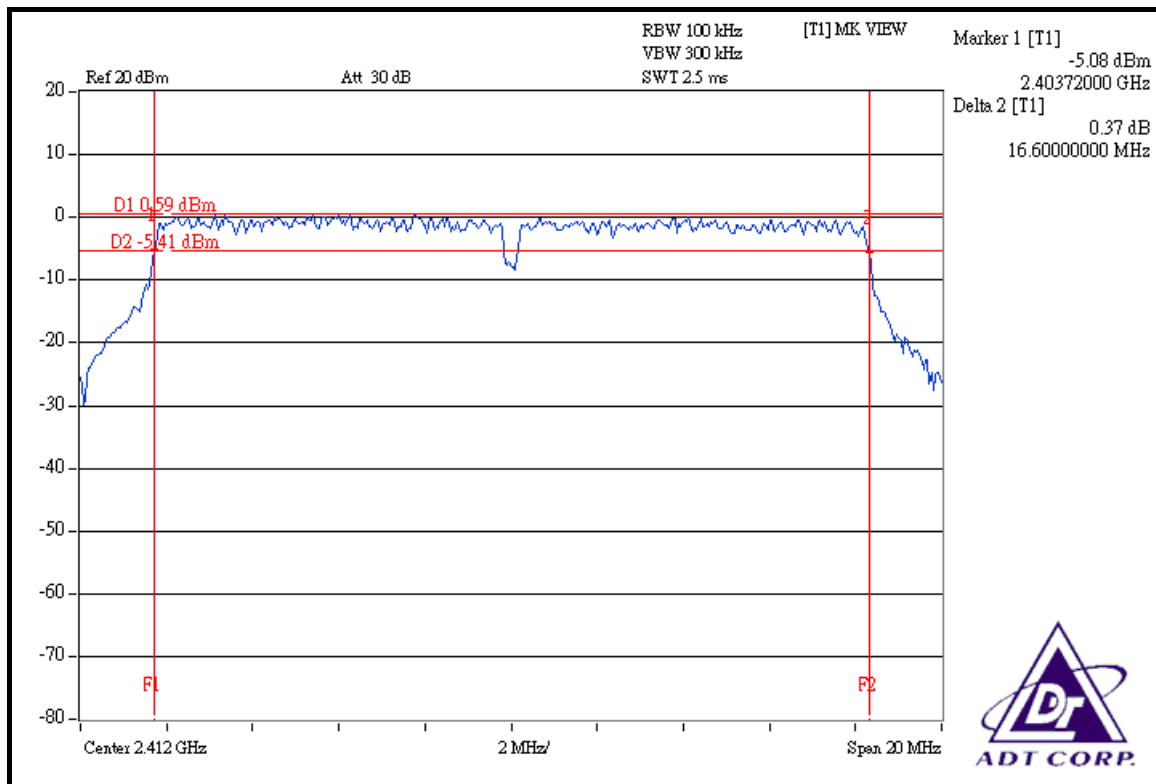

CH 6

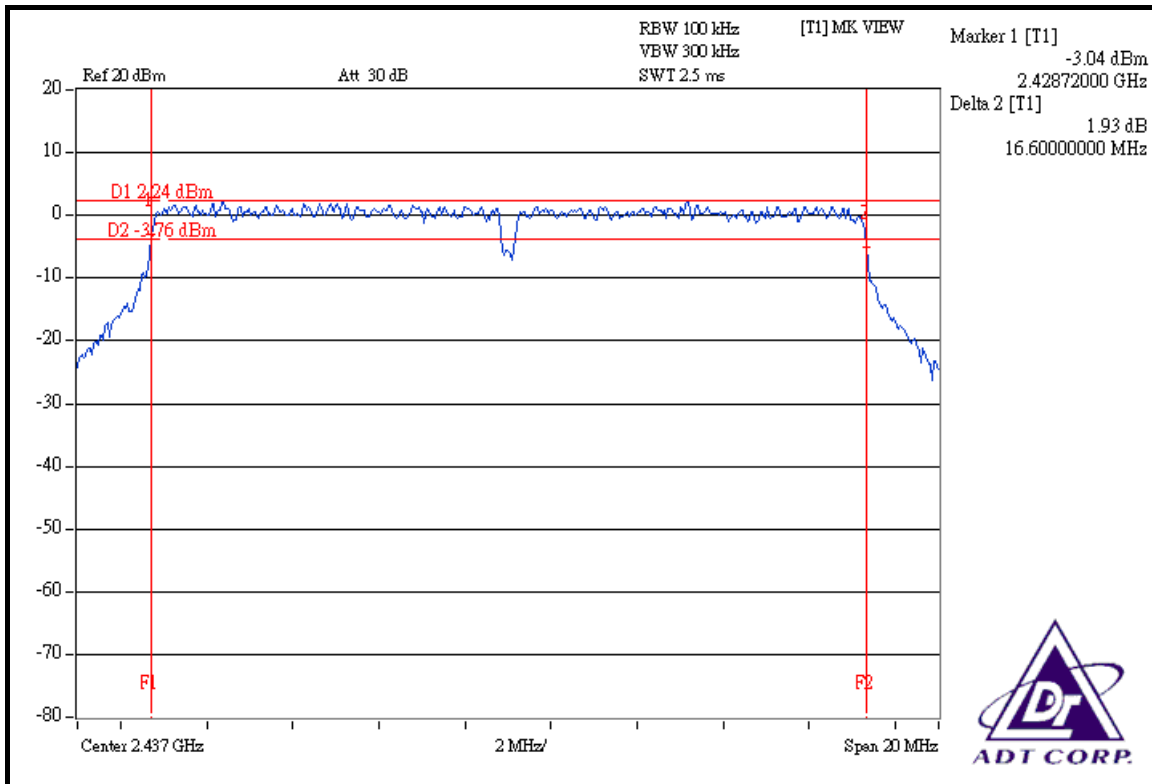

CH 11

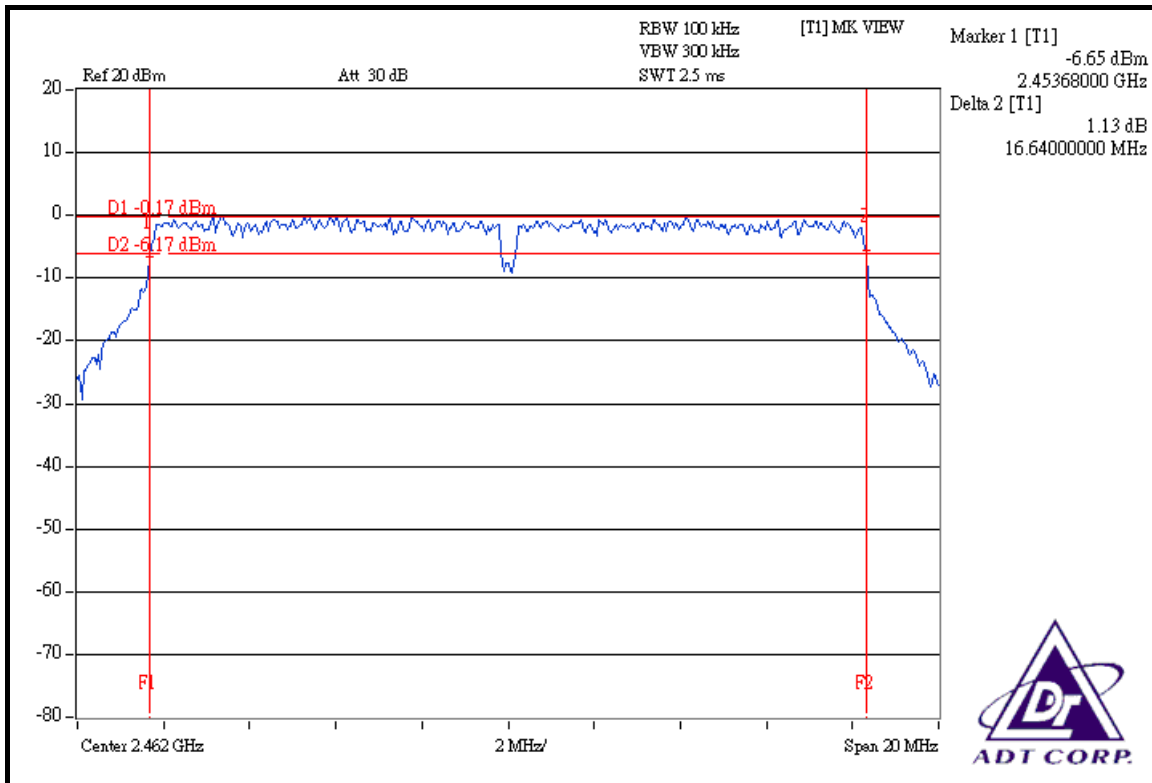




DRAFT 802.11n (20MHz) OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	7.2Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 66% RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.72	0.5	PASS
6	2437	17.72	0.5	PASS
11	2462	17.72	0.5	PASS


CH 1

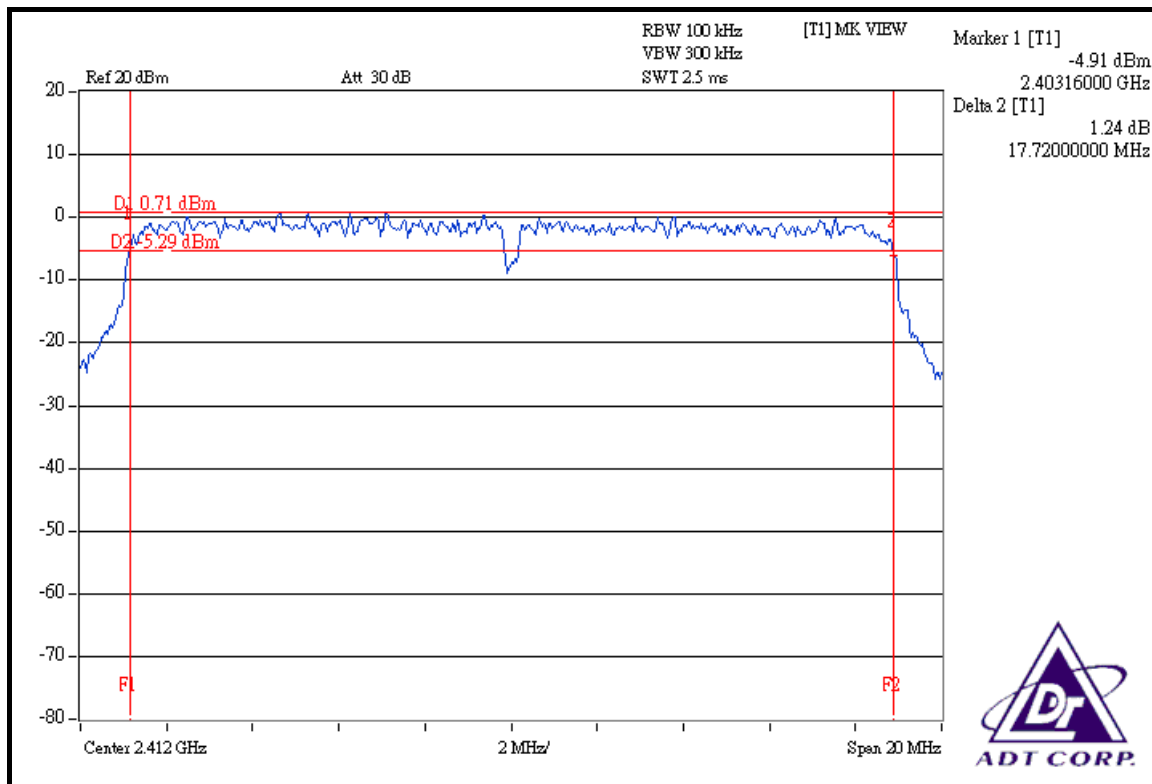

CH 6

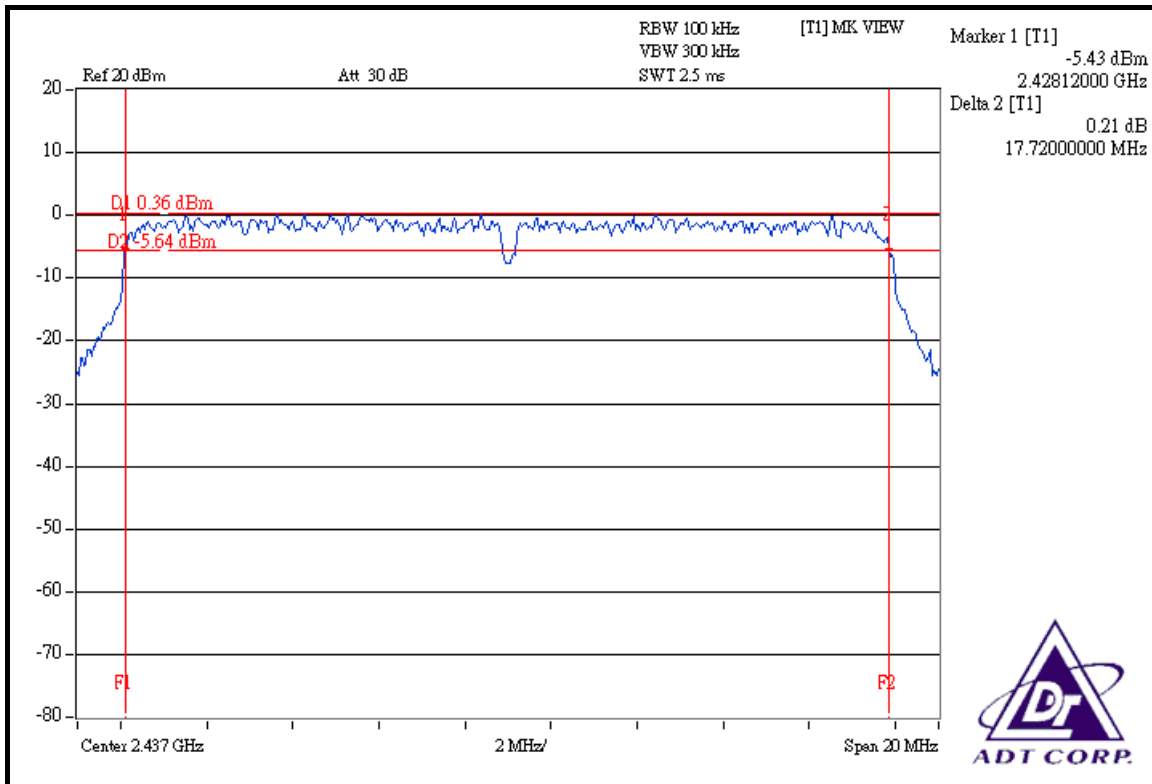

CH 11

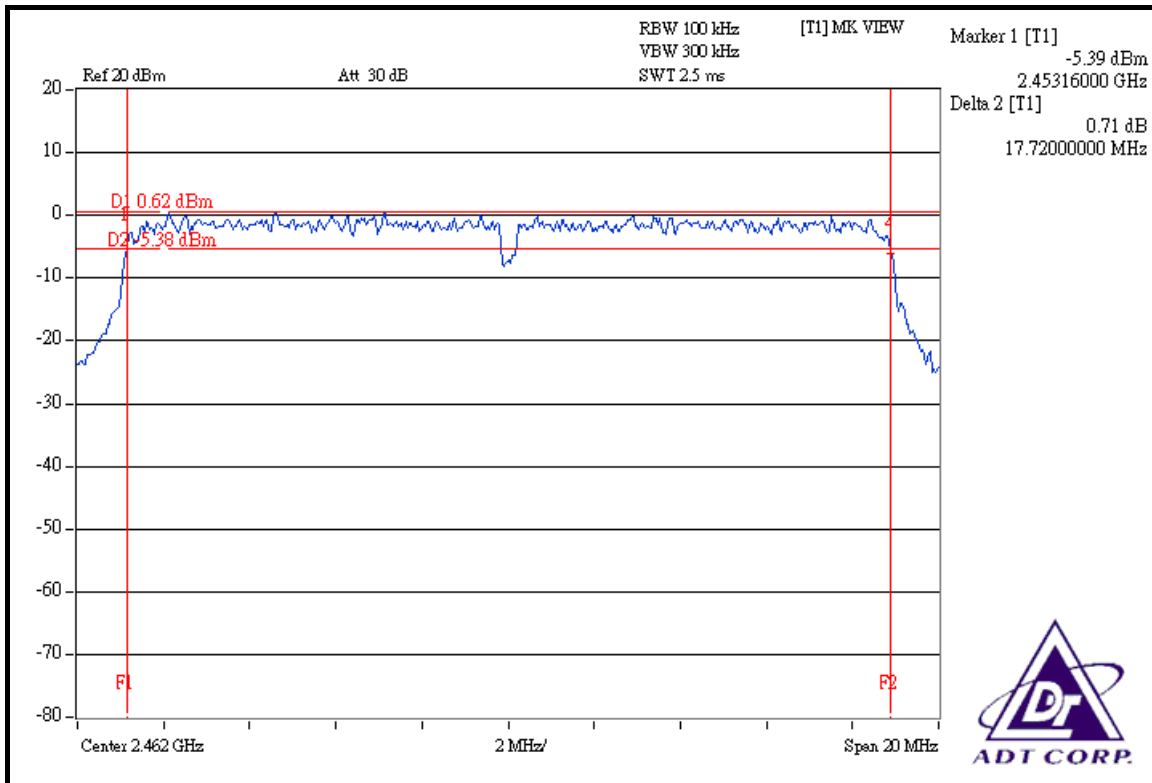




DRAFT 802.11n (40MHz) OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	15.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 66% RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2422	36.48	0.5	PASS
4	2437	36.48	0.5	PASS
7	2452	36.56	0.5	PASS

CH 1

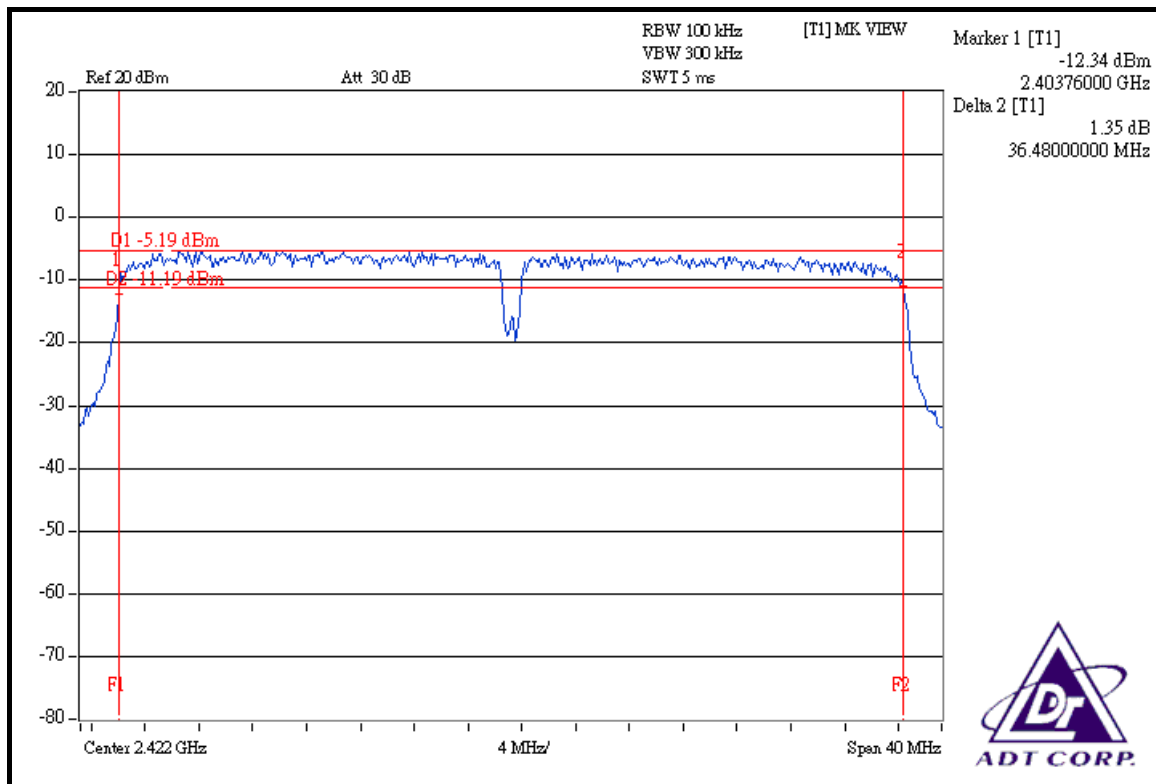



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100040	Apr. 11, 2008
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 28, 2007
TEKTRONIX OSCILLOSCOPE	TDS1012	C037299	Nov. 27, 2007
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

- a. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
- b. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
- c. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS

802.11b DSSS MODULATION

MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 65% RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	80.910	19.08	30	PASS
6	2437	100.462	20.02	30	PASS
11	2462	81.283	19.10	30	PASS

802.11g OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 65% RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	80.168	19.04	30	PASS
6	2437	126.765	21.03	30	PASS
11	2462	79.616	19.01	30	PASS



DRAFT 802.11n (20MHz) OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	7.2Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 63% RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	81.096	19.09	30	PASS
6	2437	79.983	19.03	30	PASS
11	2462	80.910	19.08	30	PASS

DRAFT 802.11n (40MHz) OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	15.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 63% RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2422	32.063	15.06	30	PASS
4	2437	35.645	15.52	30	PASS
7	2452	35.563	15.51	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100040	Jun. 28, 2008

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6


4.5.7 TEST RESULTS

802.11b DSSS MODULATION

MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 65% RH, 991hPa
TESTED BY	Long Chen		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2412	-13.00	8	PASS
6	2437	-11.86	8	PASS
11	2462	-13.05	8	PASS

CH 1

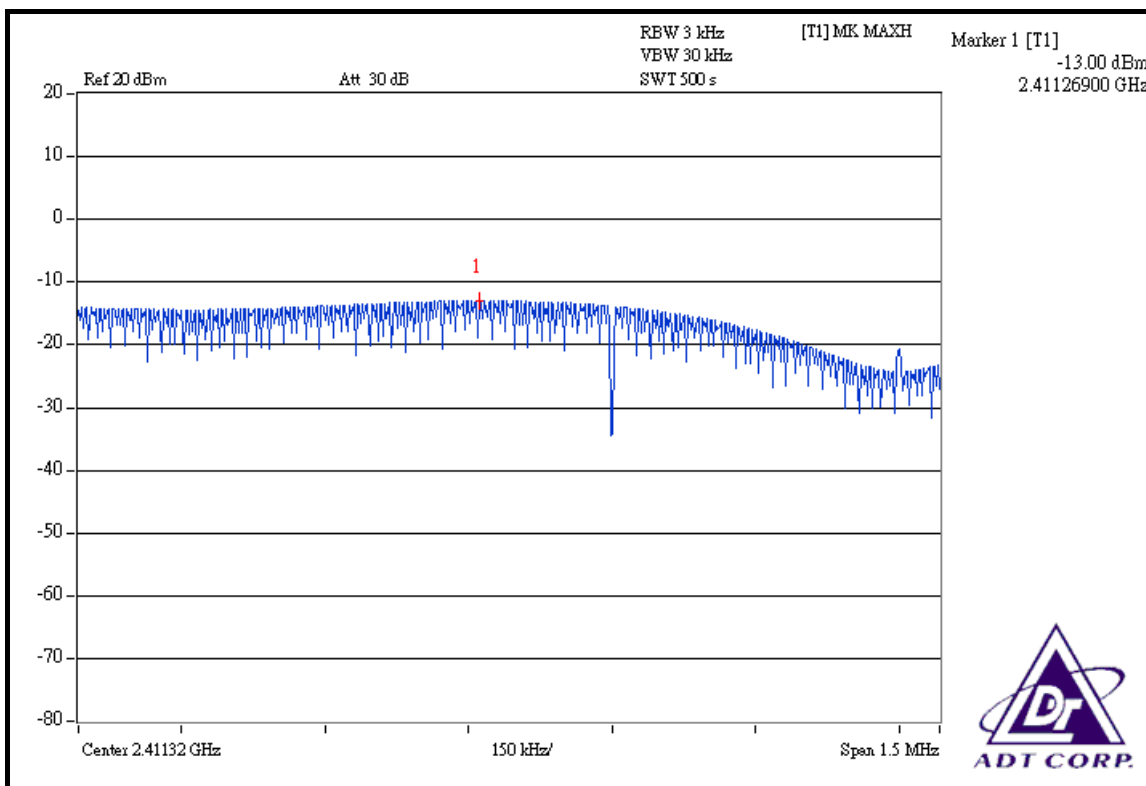




CH 6

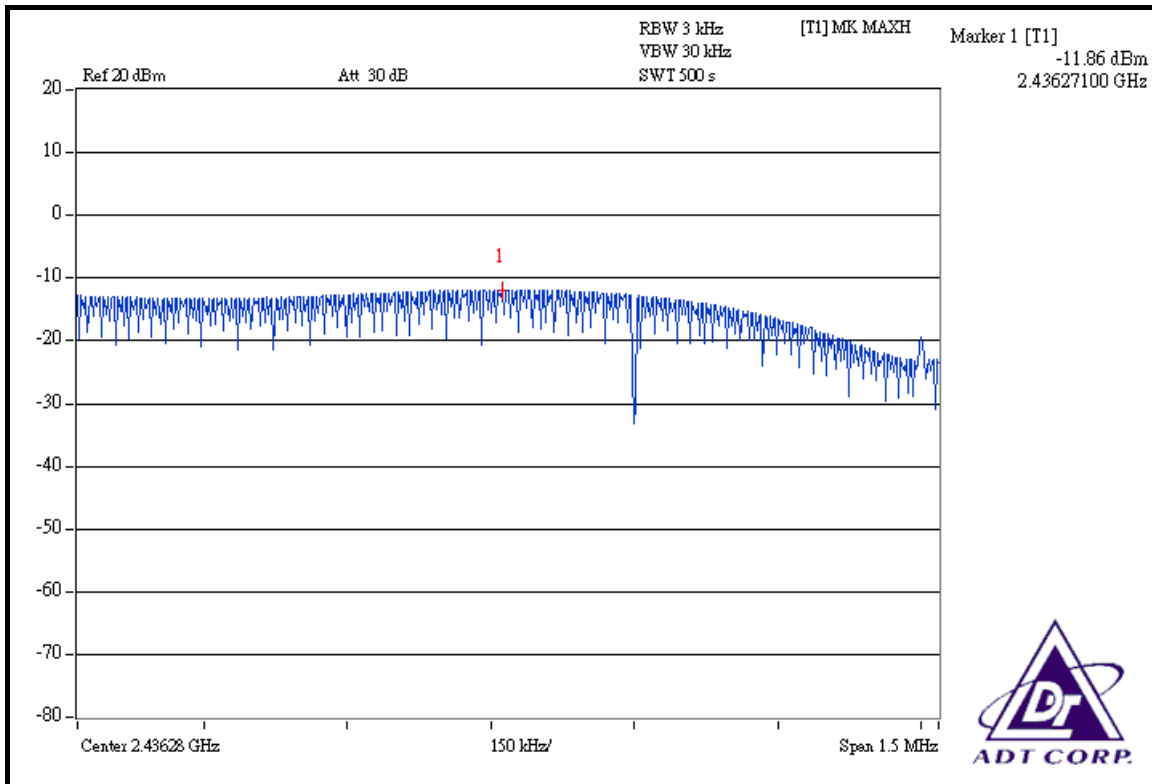

CH 11

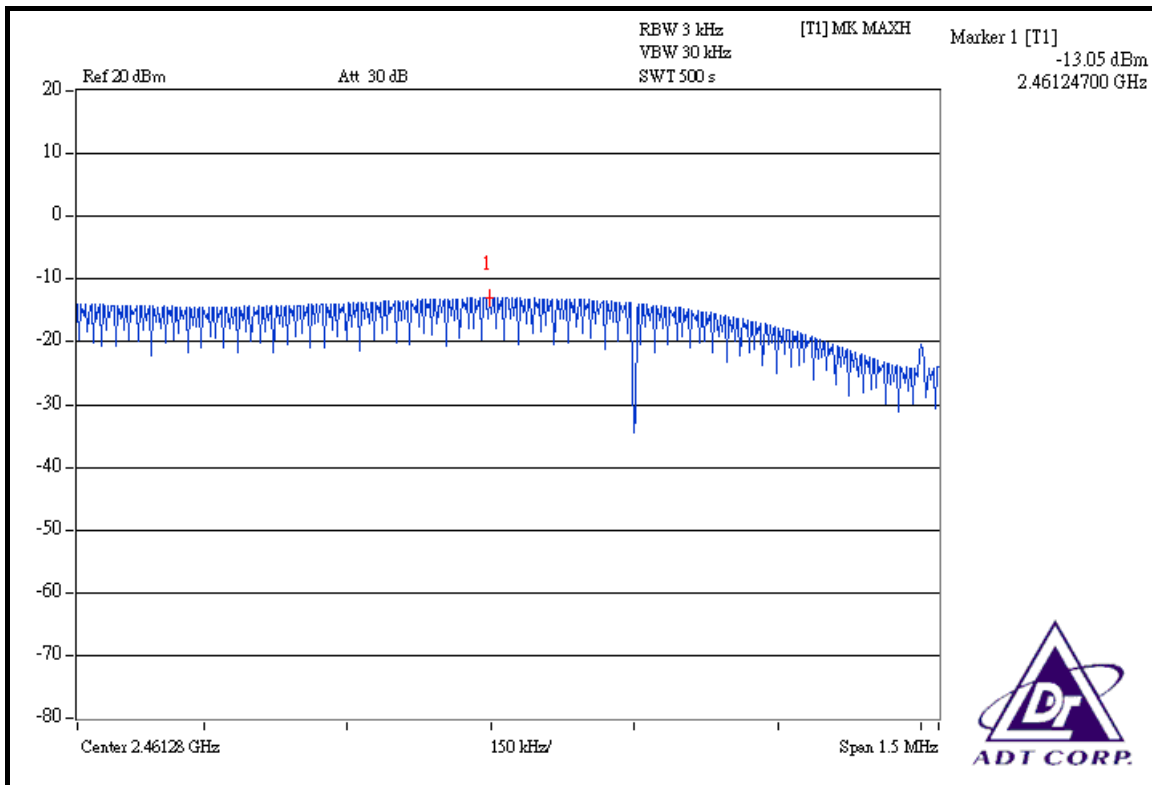




802.11g OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 65% RH, 991hPa
TESTED BY	Long Chen		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2412	-14.66	8	PASS
6	2437	-12.46	8	PASS
11	2462	-14.58	8	PASS

CH 1

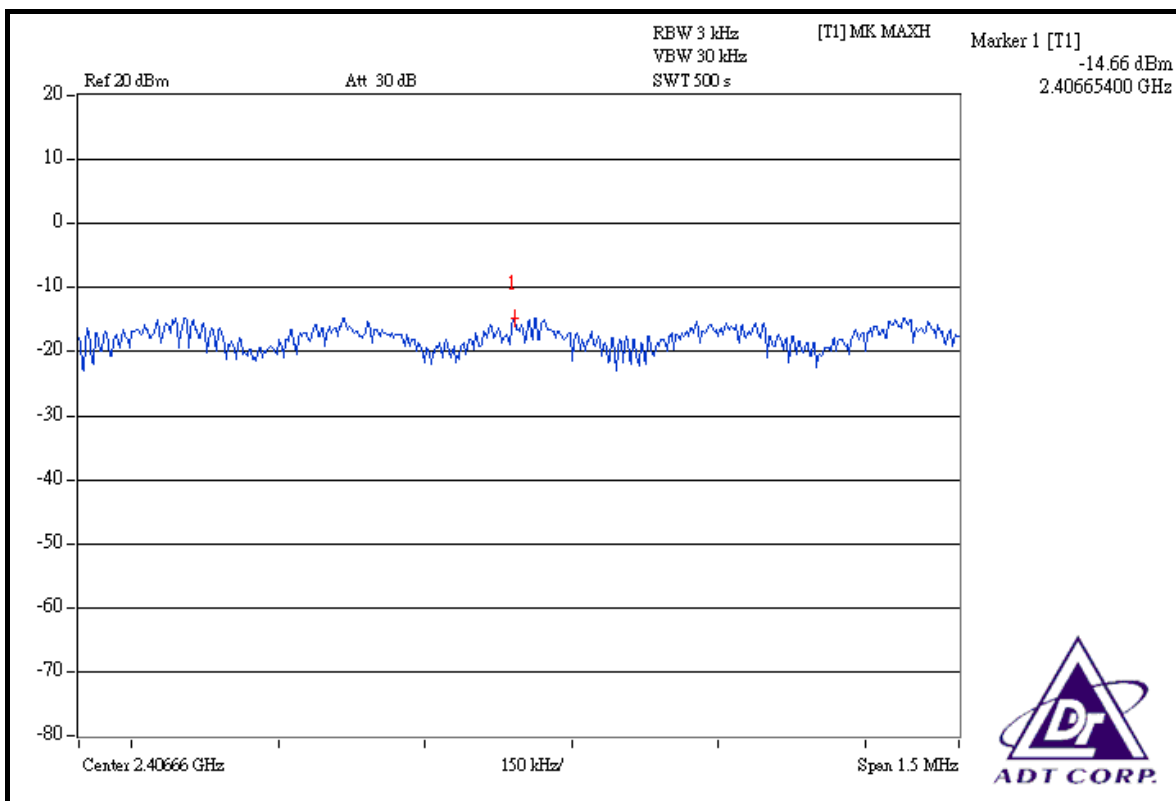




CH 6

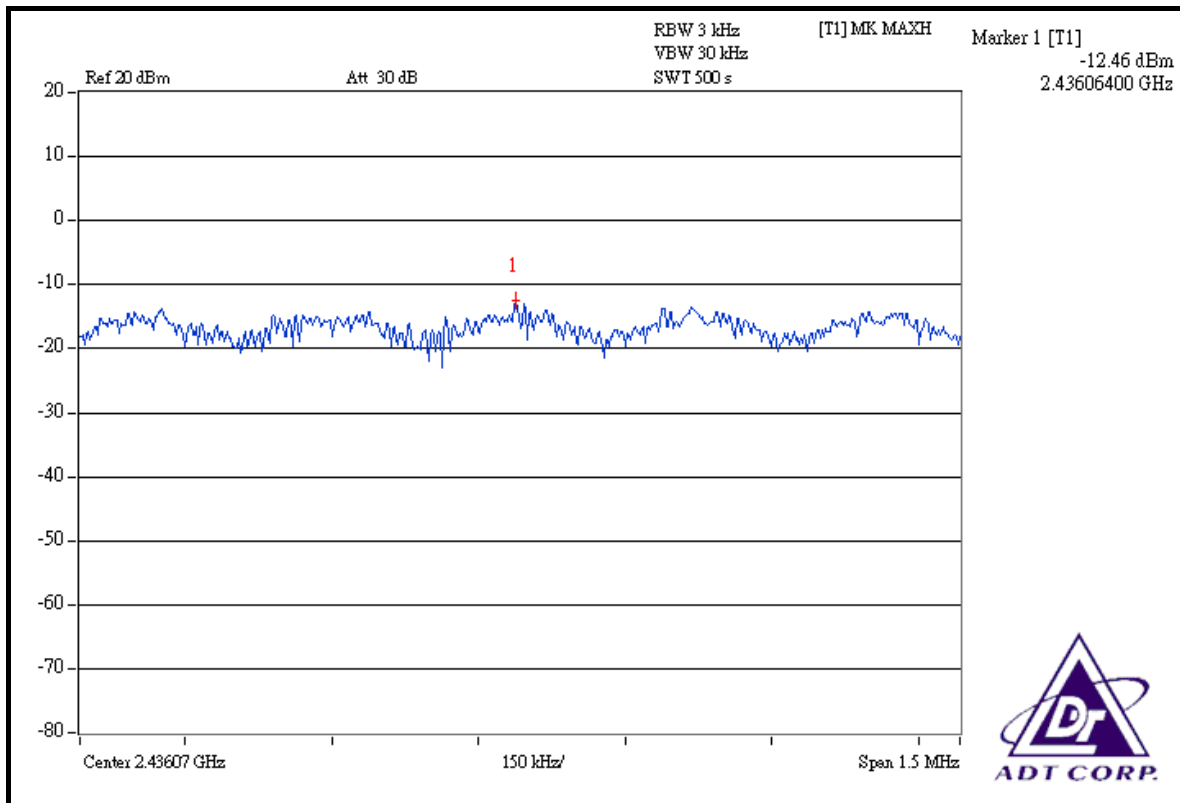

CH 11

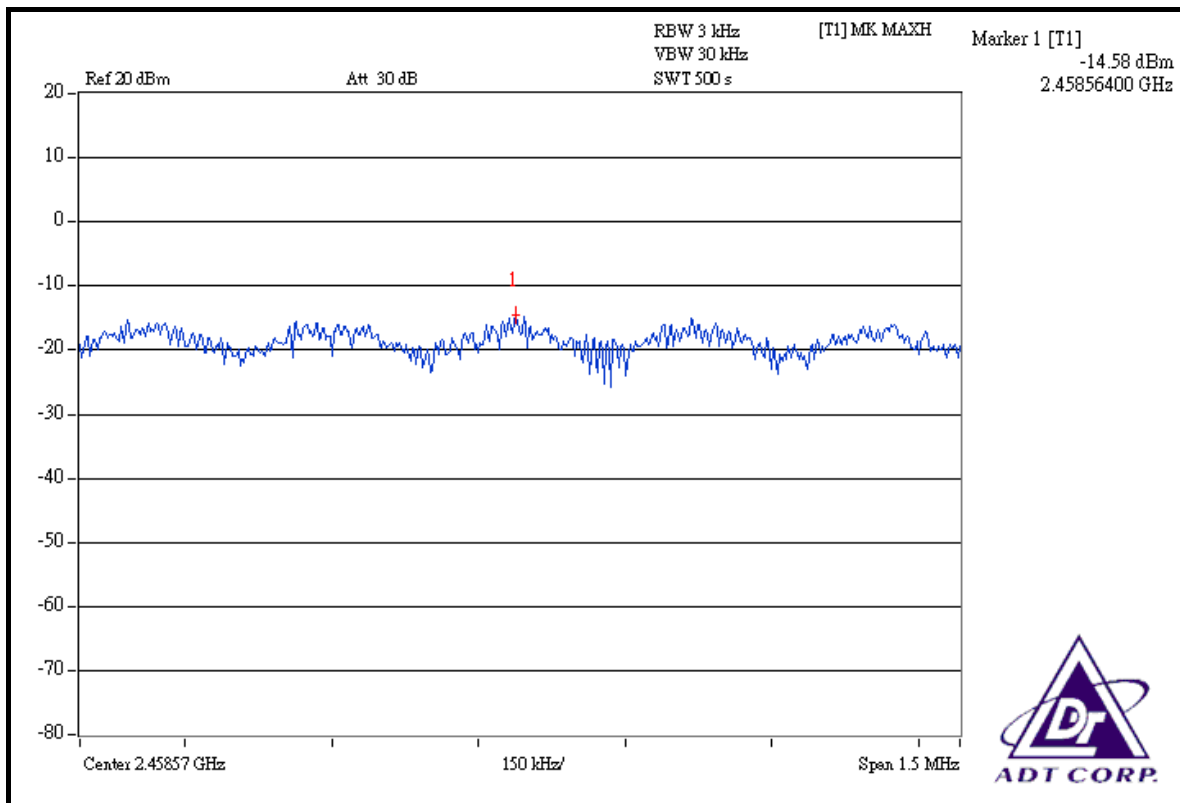




DRAFT 802.11n (20MHz) OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	7.2Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 63% RH, 991hPa
TESTED BY	Long Chen		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2412	-13.09	8	PASS
6	2437	-13.02	8	PASS
11	2462	-13.15	8	PASS

CH 1

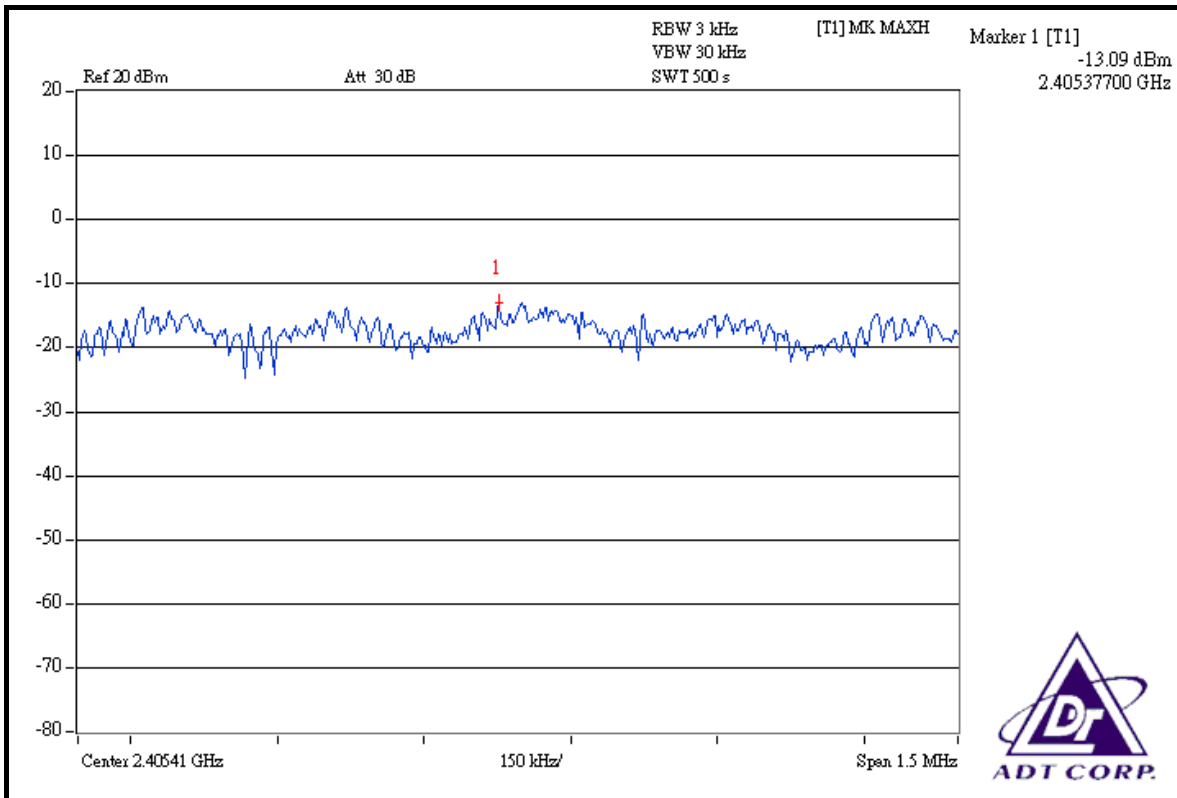




CH 6

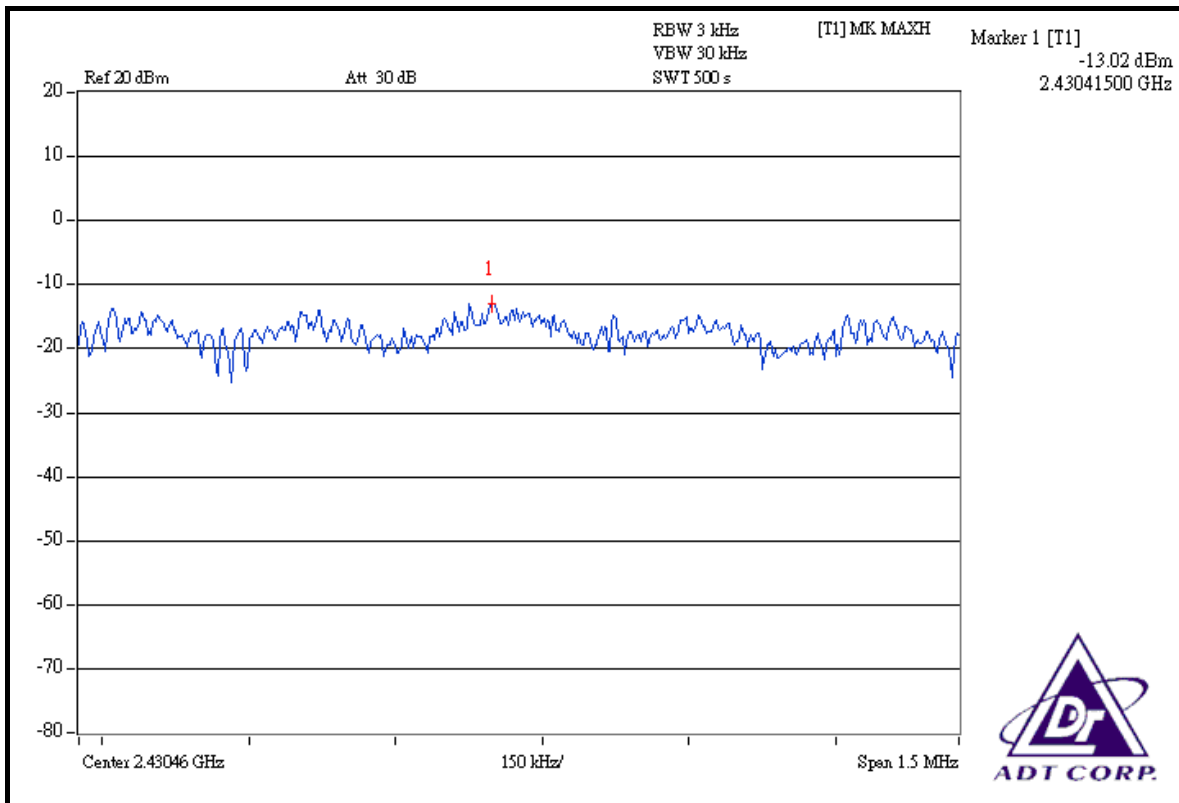

CH 11

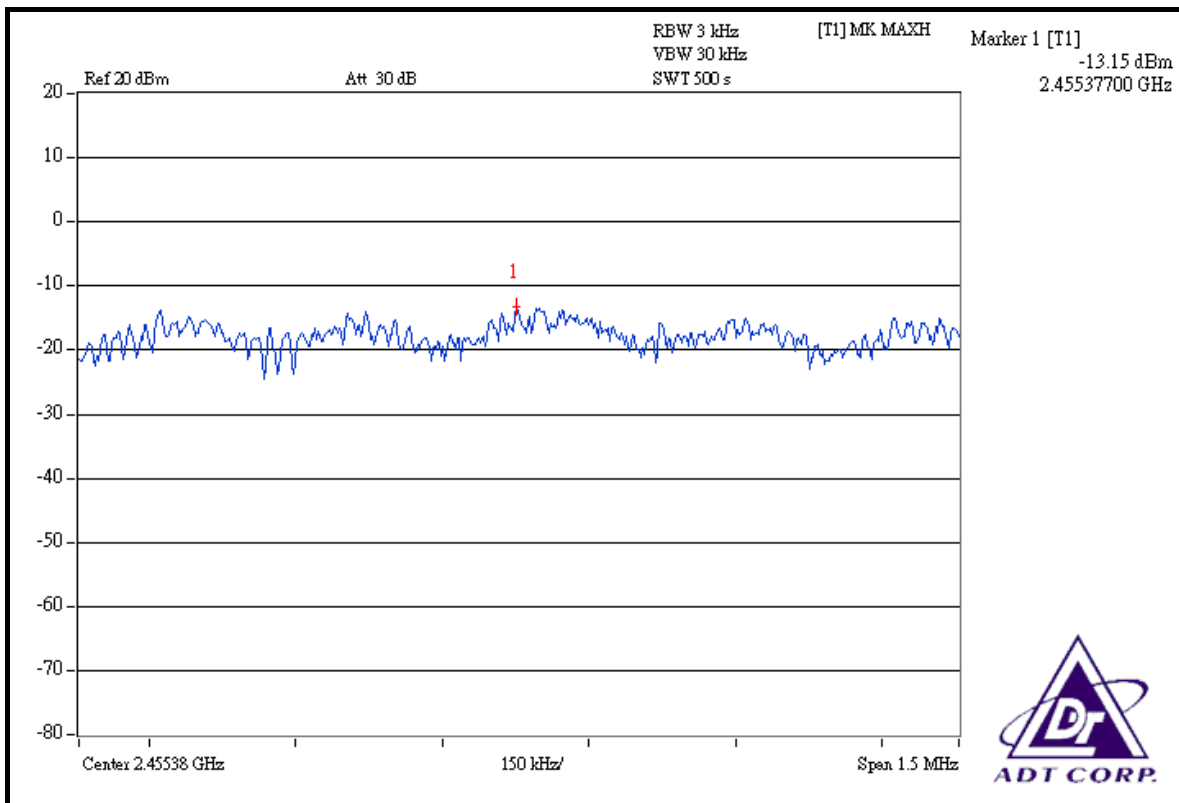




DRAFT 802.11n (40MHz) OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	15.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 63% RH, 991hPa
TESTED BY	Long Chen		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2422	-17.64	8	PASS
4	2437	-17.04	8	PASS
7	2452	-17.26	8	PASS

CH 1

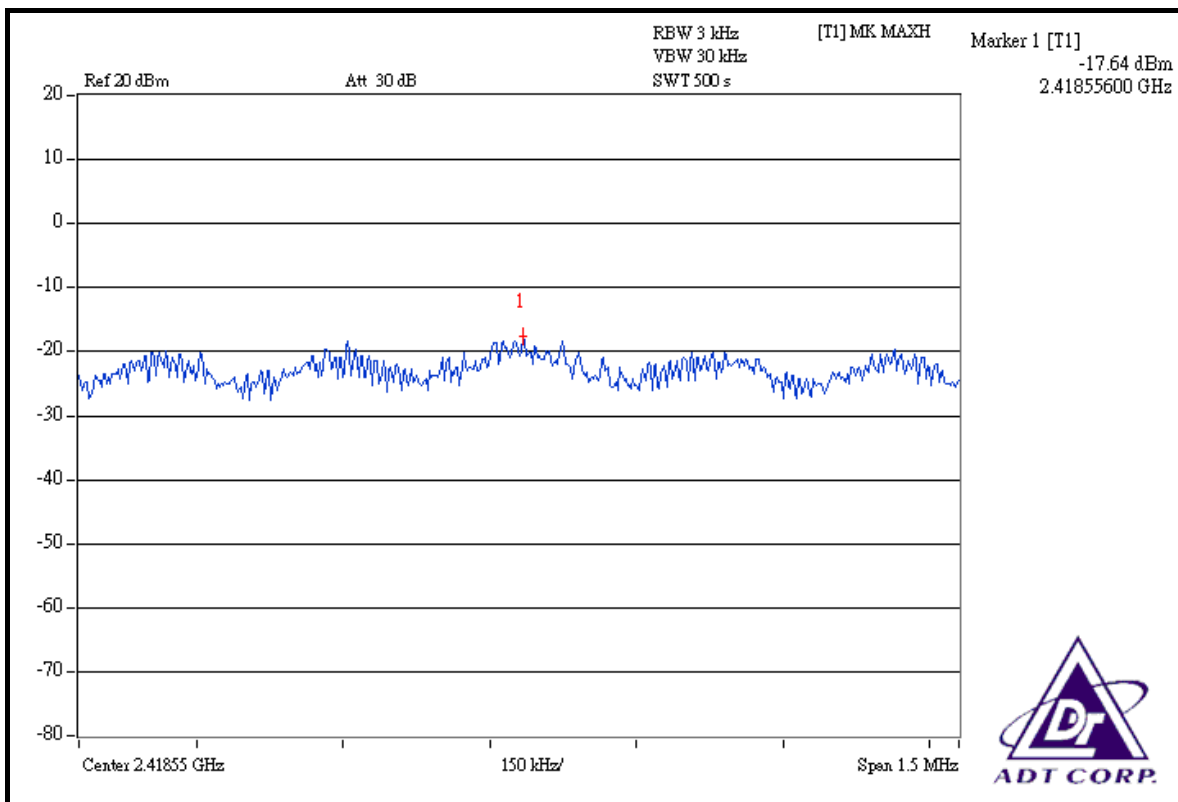




CH 4

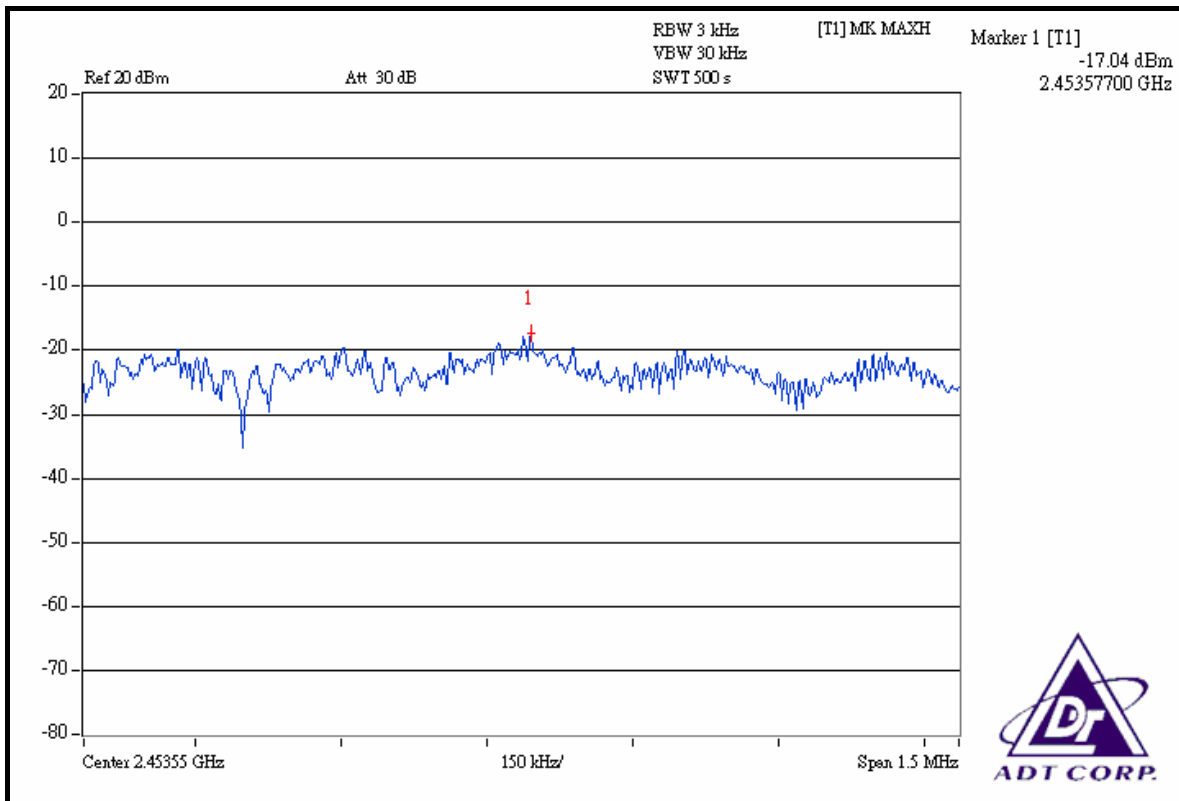

CH 7

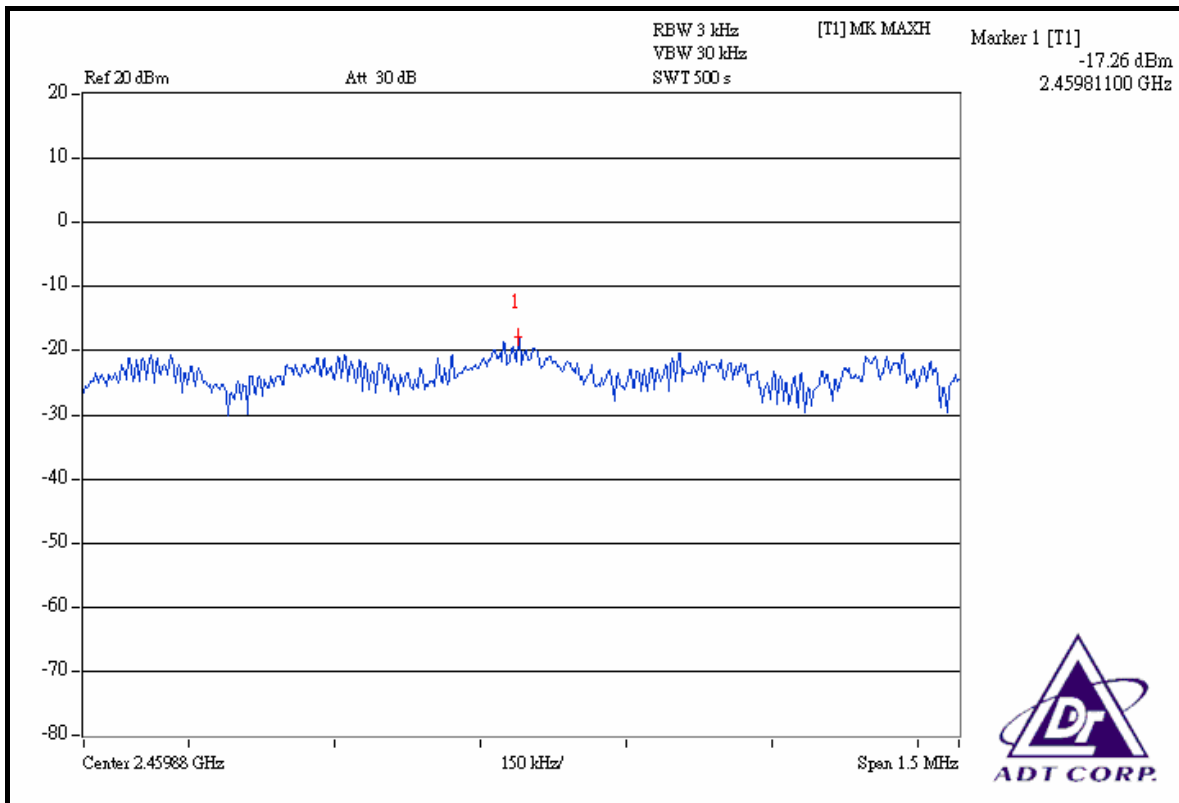



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100040	Jun. 28, 2008

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 10Hz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW = 100kHz, VBW = 300kHz; Average RBW = 1MHz, VBW = 10Hz) are attached on the following pages.

NOTE: The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.6 TEST RESULTS

The spectrum plots are attached on the following 24 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS MODULATION

NOTE 1:



The band edge emission plot on the next page shows 49.45dBc between carrier maximum power and local maximum emission in restrict band (2.38720GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 111.55dBuV/m (Peak), so the maximum field strength in restrict band is $111.55 - 49.45 = 62.10$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 55.83dBc between carrier maximum power and local maximum emission in restrict band (2.38620GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 107.44dBuV/m (Average), so the maximum field strength in restrict band is $107.44 - 55.83 = 51.61$ dBuV/m which is under 54dBuV/m limit.



NOTE 2:

The band edge emission plot on the next second page shows 49.49dBc between carrier maximum power and local maximum emission in restrict band (2.48800GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 111.89dBuV/m (Peak), so the maximum field strength in restrict band is $111.89 - 49.49 = 62.40$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 55.13dBc between carrier maximum power and local maximum emission in restrict band (2.48820GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 107.93dBuV/m (Average), so the maximum field strength in restrict band is $107.93 - 55.13 = 52.80$ dBuV/m which is under 54dBuV/m limit.

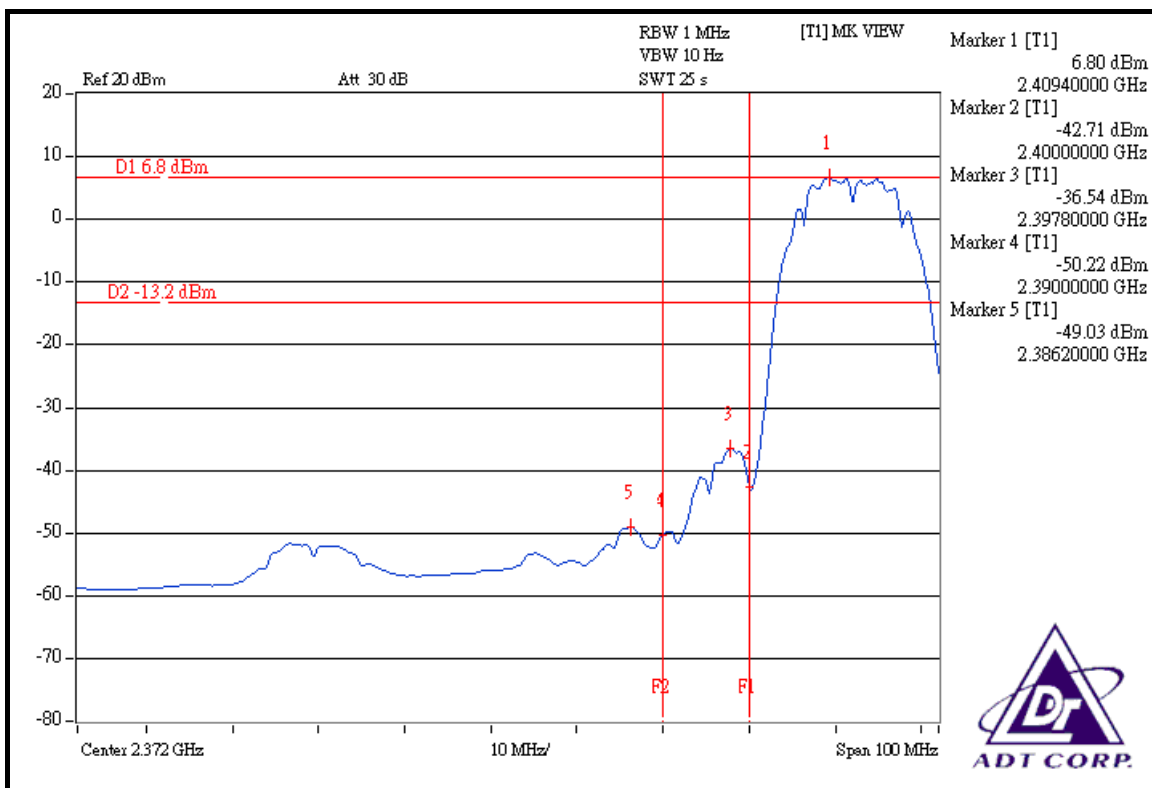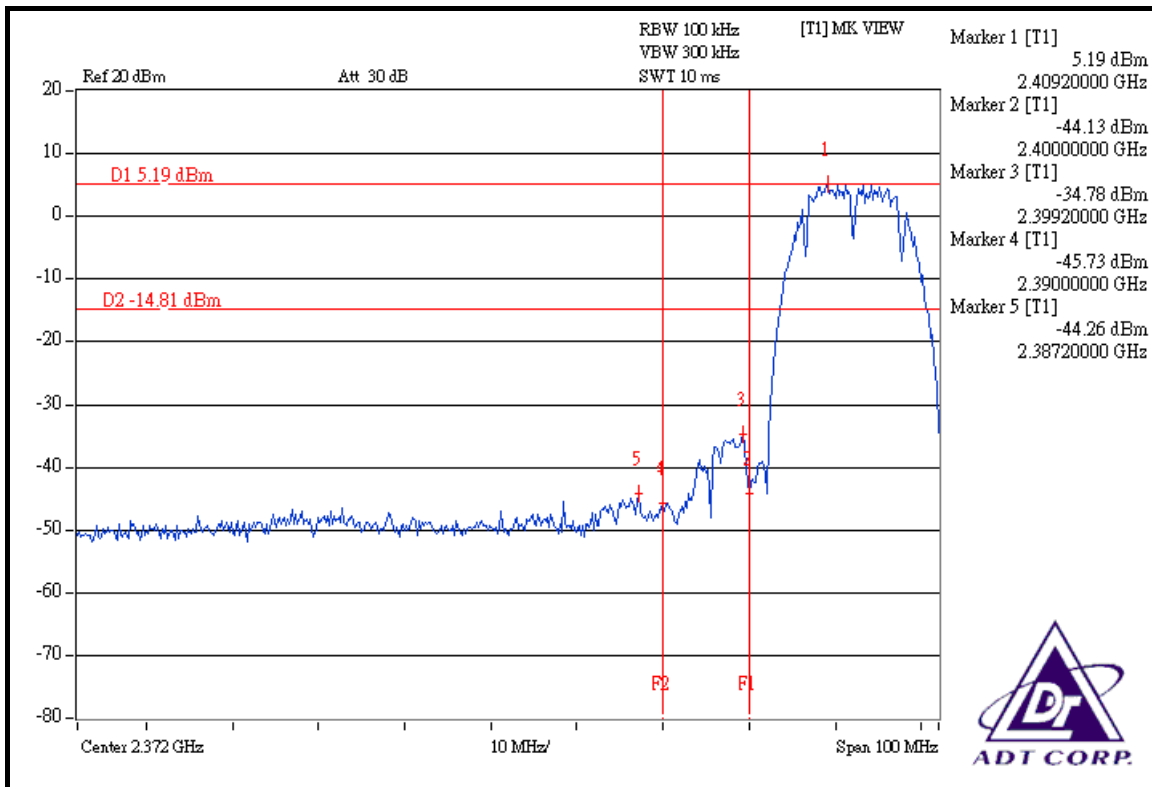

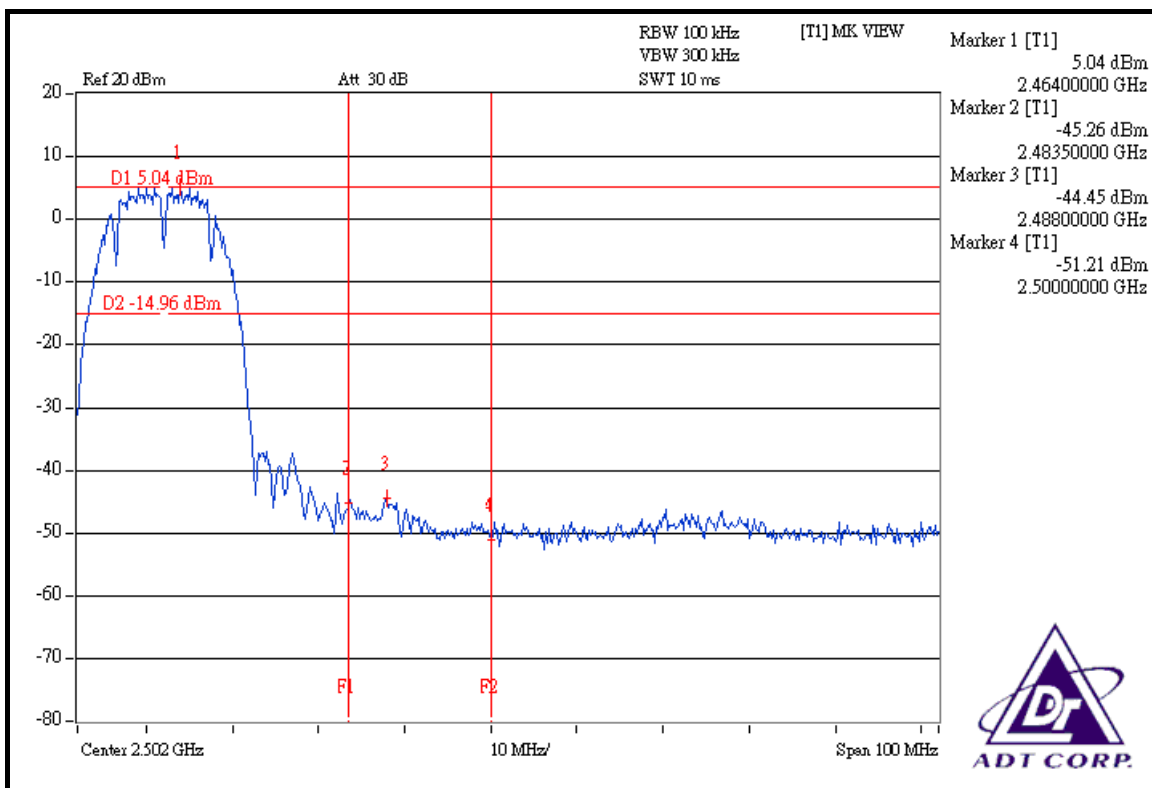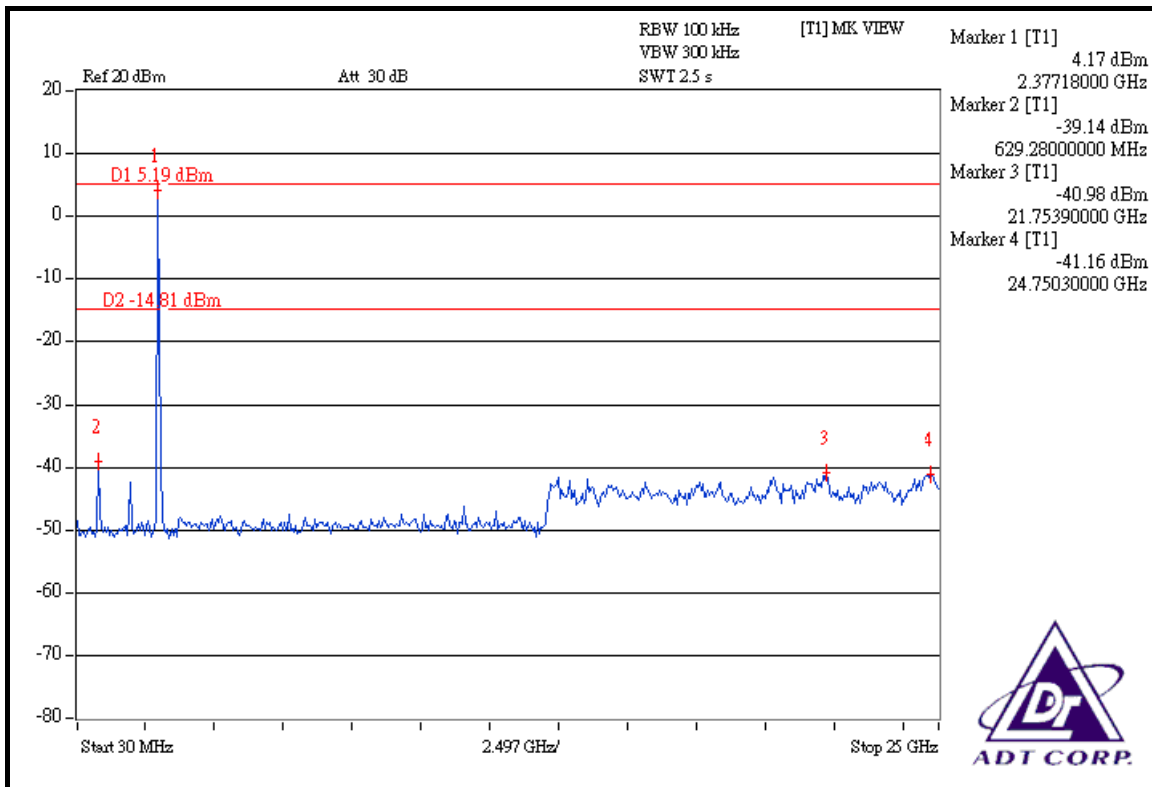

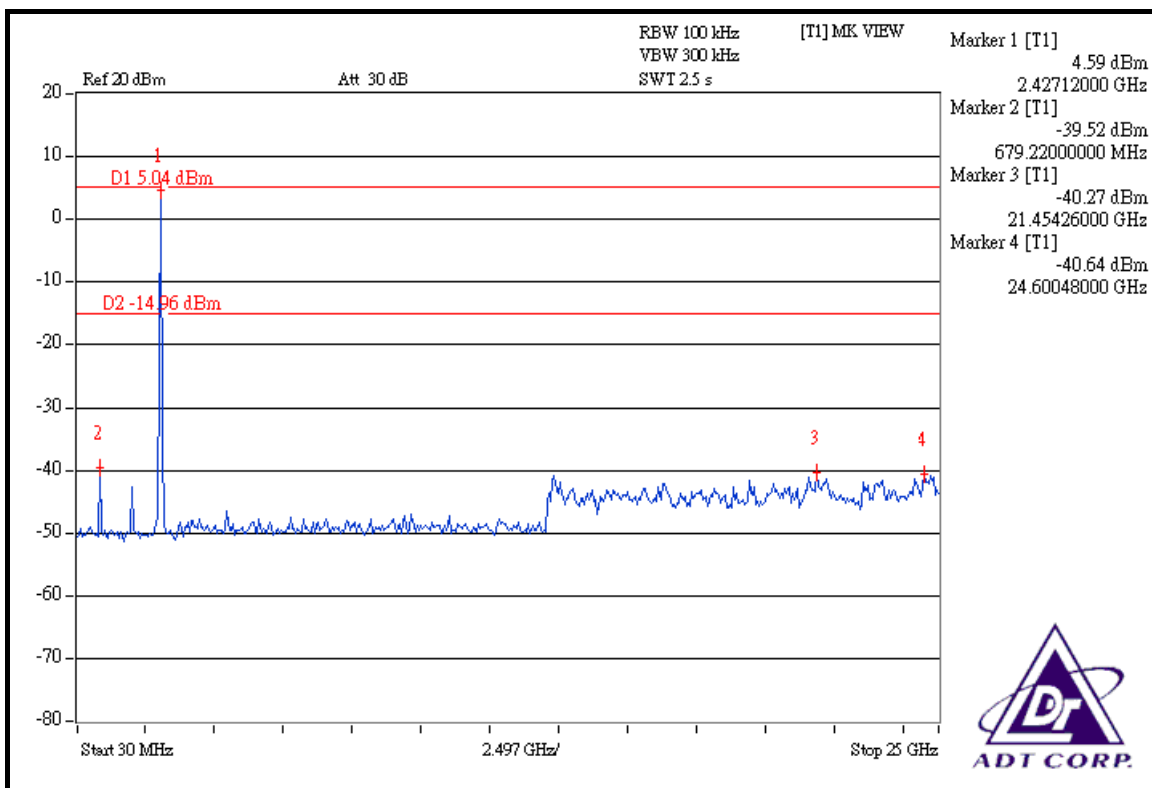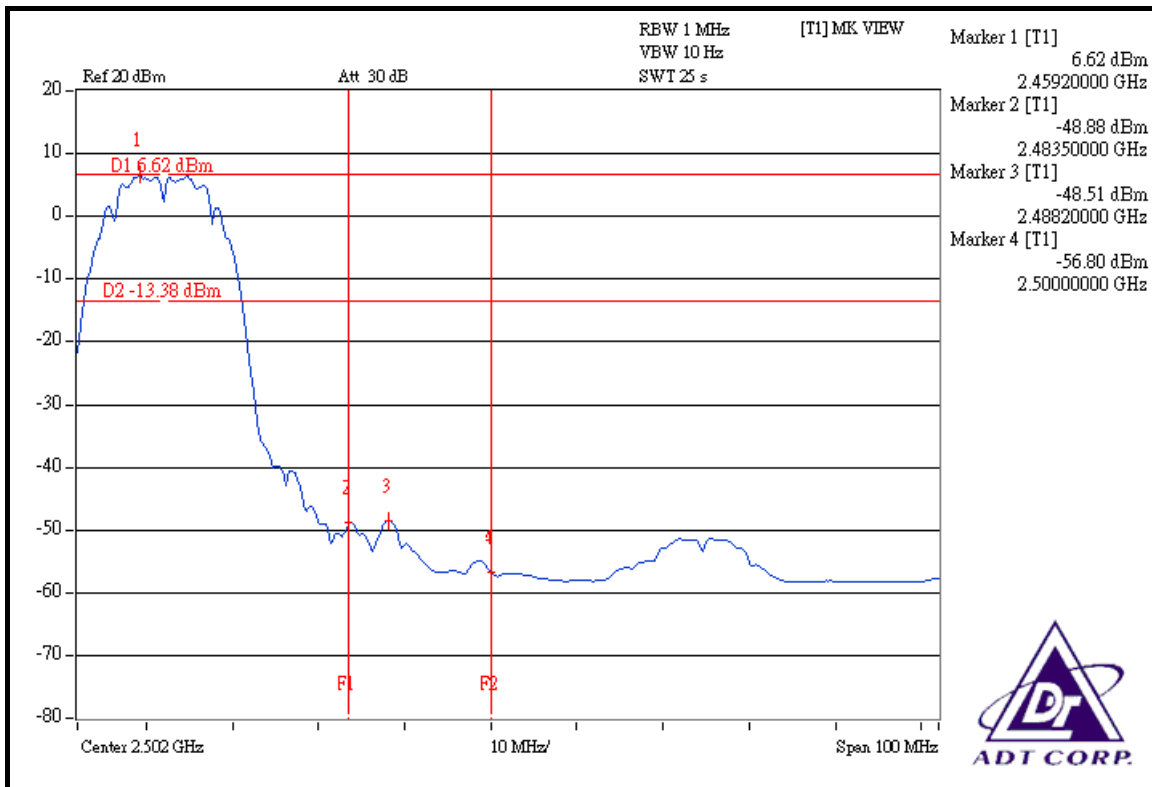

802.11g OFDM MODULATION

NOTE 1:



The band edge emission plot on the next page shows 41.42dBc between carrier maximum power and local maximum emission in restrict band (2.38900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 110.88dBuV/m (Peak), so the maximum field strength in restrict band is $110.88 - 41.42 = 69.46$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 47.86dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 100.47dBuV/m (Average), so the maximum field strength in restrict band is $100.47 - 47.86 = 52.61$ dBuV/m which is under 54dBuV/m limit.



NOTE 2:

The band edge emission plot on the next second page shows 44.00dBc between carrier maximum power and local maximum emission in restrict band (2.48520GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 110.98dBuV/m (Peak), so the maximum field strength in restrict band is $110.98 - 44.00 = 66.98$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 49.77dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 100.59dBuV/m (Average), so the maximum field strength in restrict band is $100.59 - 49.77 = 50.82$ dBuV/m which is under 54dBuV/m limit.

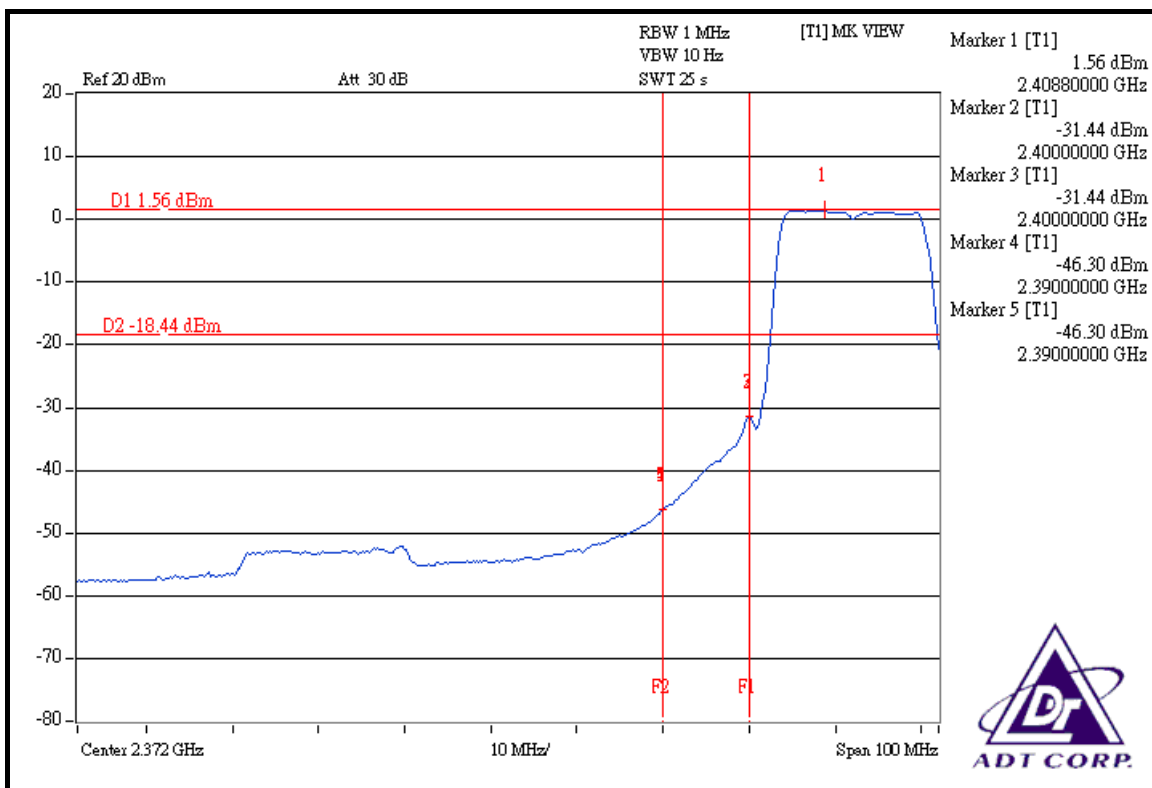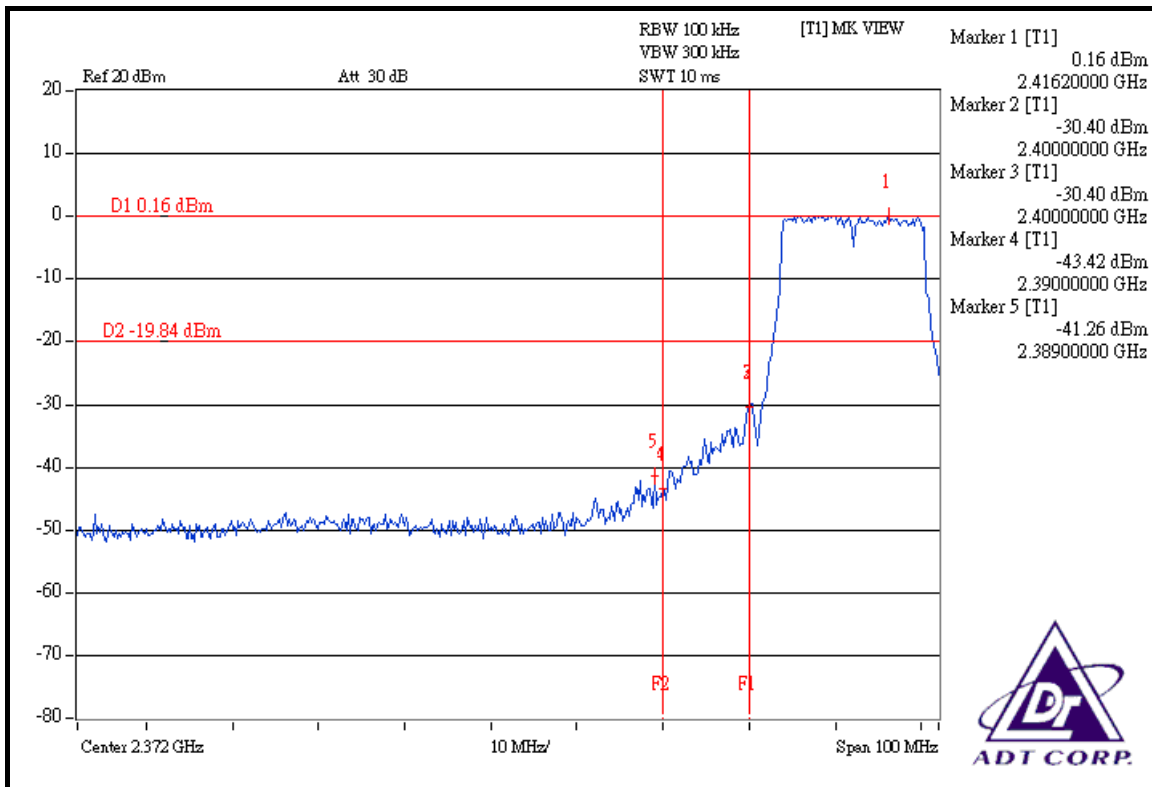

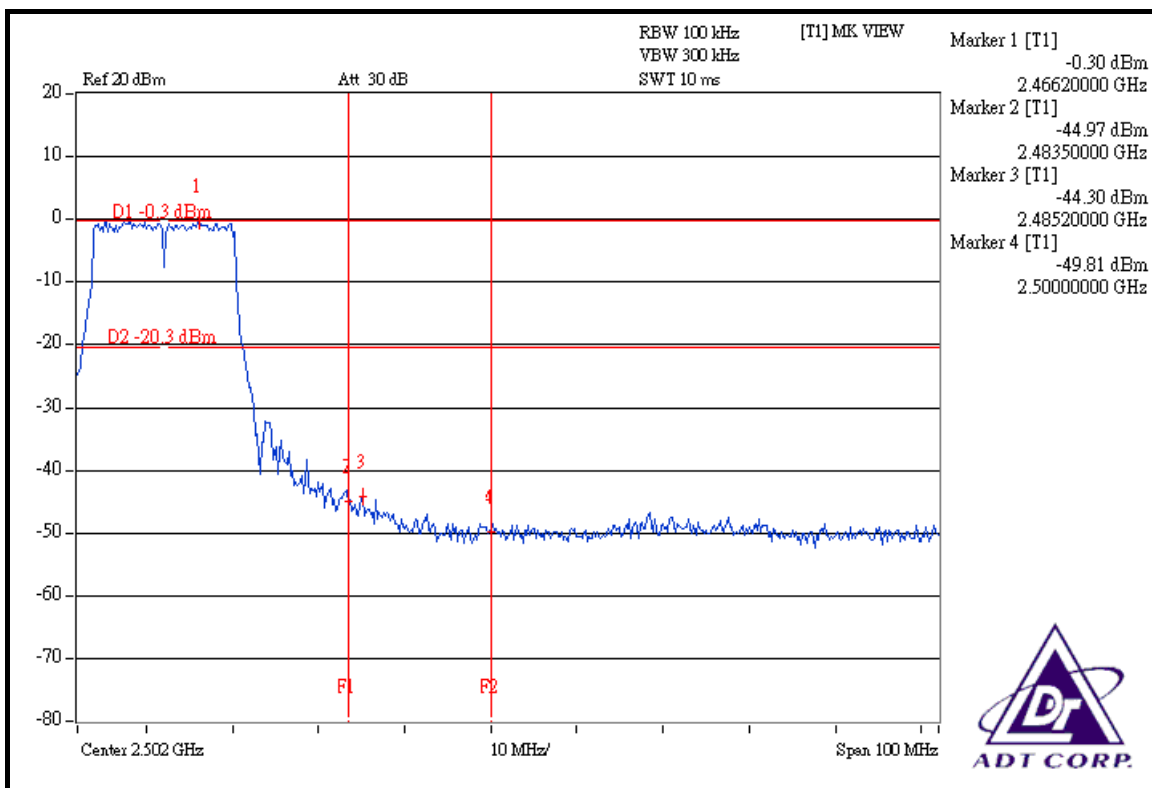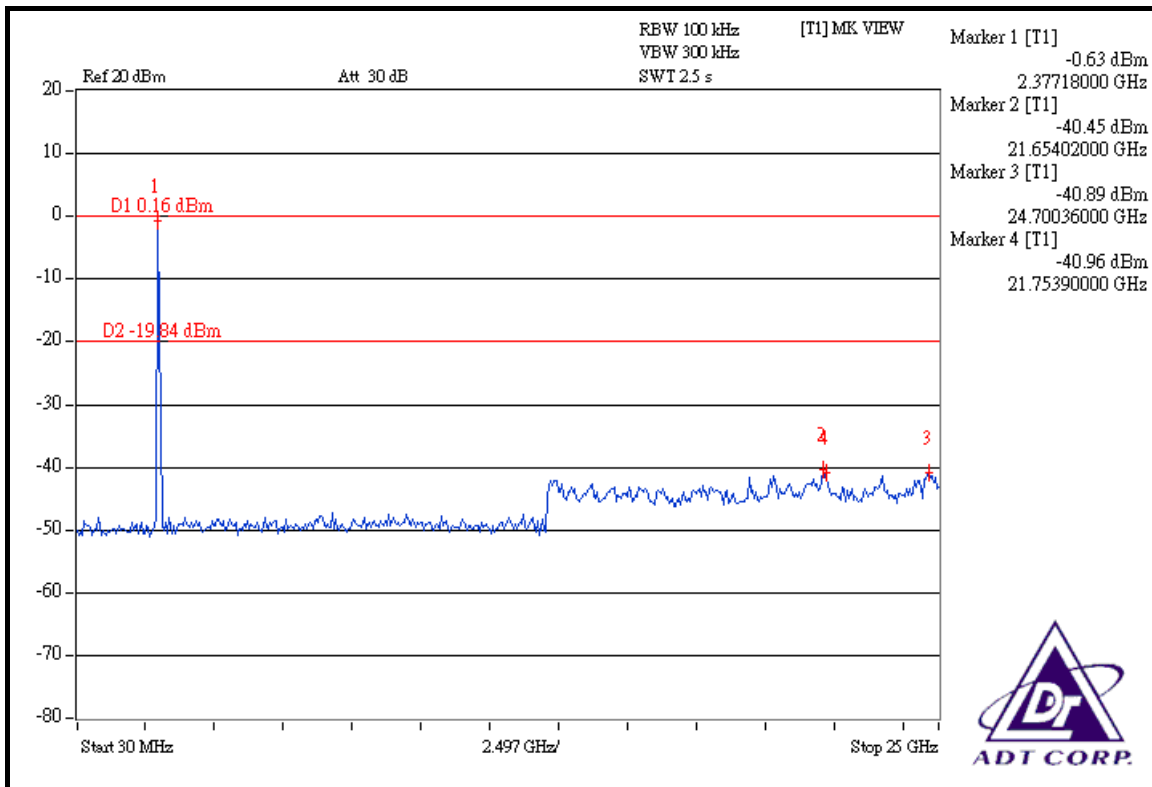

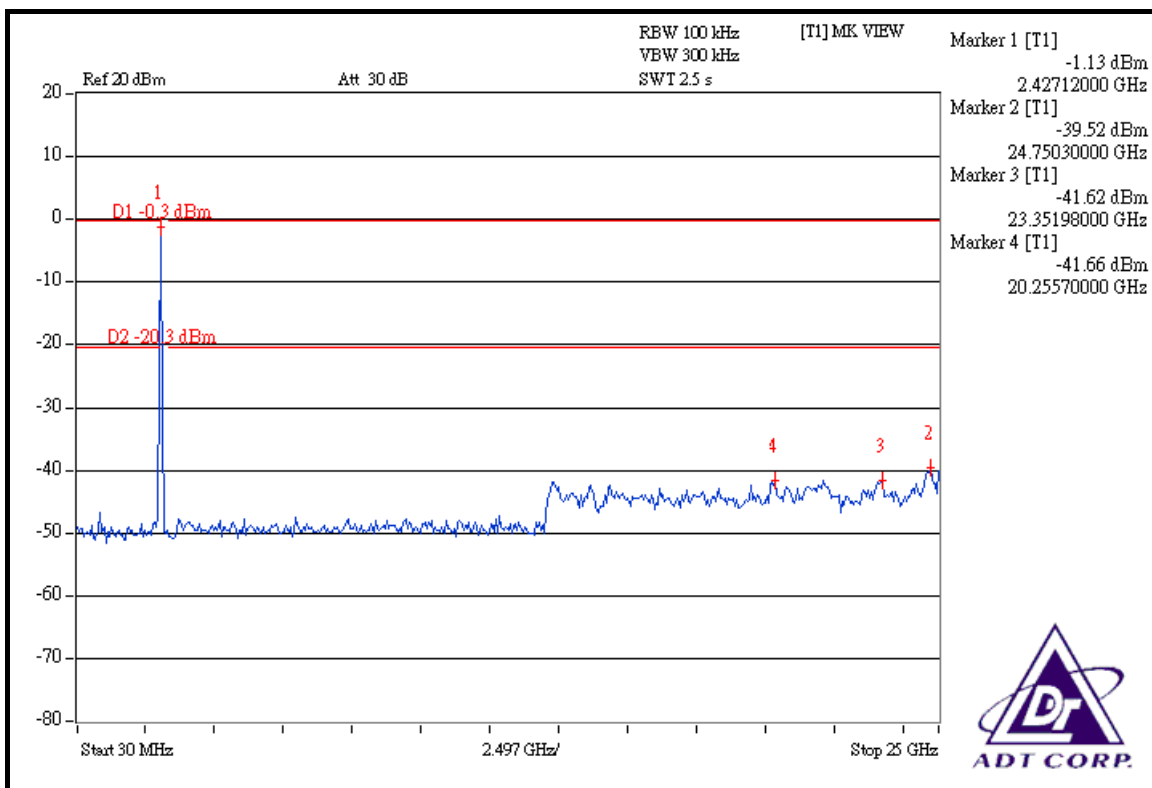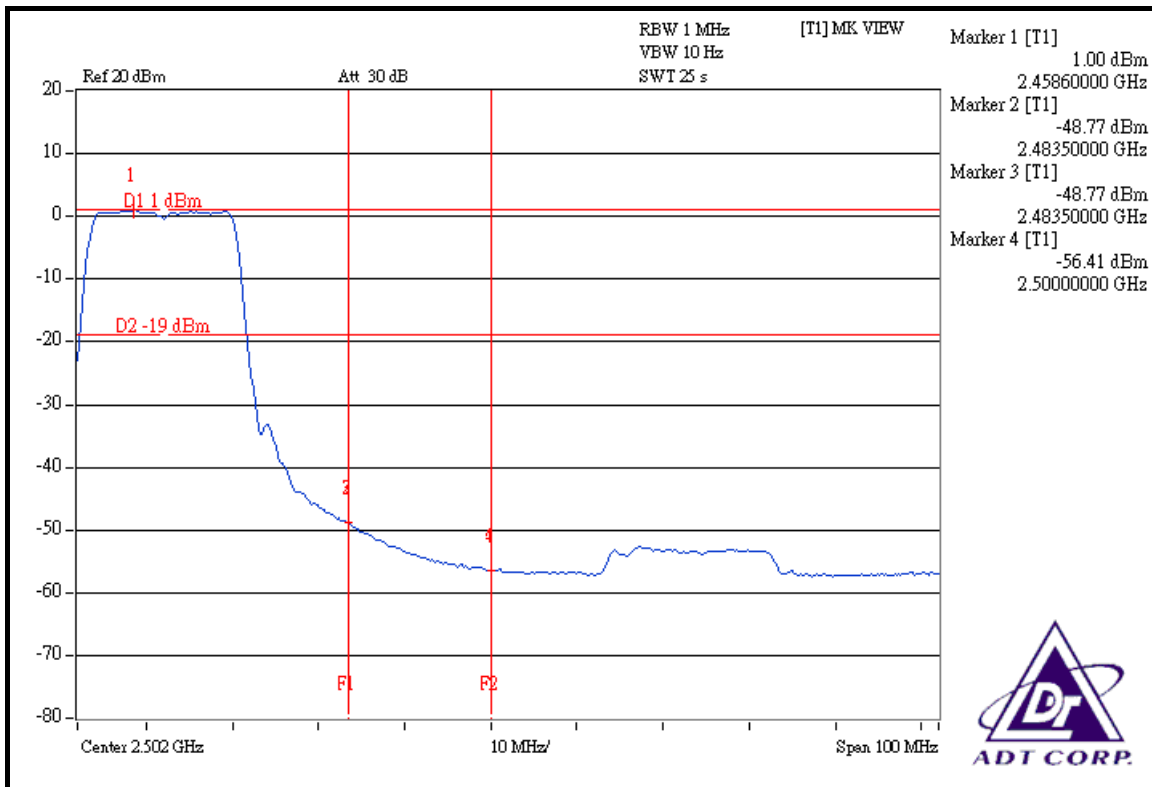

DRAFT 802.11n (20MHz) OFDM MODULATION

NOTE 1:



The band edge emission plot on the next page shows 41.98dBc between carrier maximum power and local maximum emission in restrict band (2.38920GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 110.40dBuV/m (Peak), so the maximum field strength in restrict band is $110.40 - 41.98 = 68.42$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 46.39dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 98.32dBuV/m (Average), so the maximum field strength in restrict band is $98.32 - 46.39 = 51.93$ dBuV/m which is under 54dBuV/m limit.



NOTE 2:

The band edge emission plot on the next second page shows 45.65dBc between carrier maximum power and local maximum emission in restrict band (2.48400GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 110.68dBuV/m (Peak), so the maximum field strength in restrict band is $110.68 - 45.65 = 65.03$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 49.43dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 98.61dBuV/m (Average), so the maximum field strength in restrict band is $98.61 - 49.43 = 49.18$ dBuV/m which is under 54dBuV/m limit.

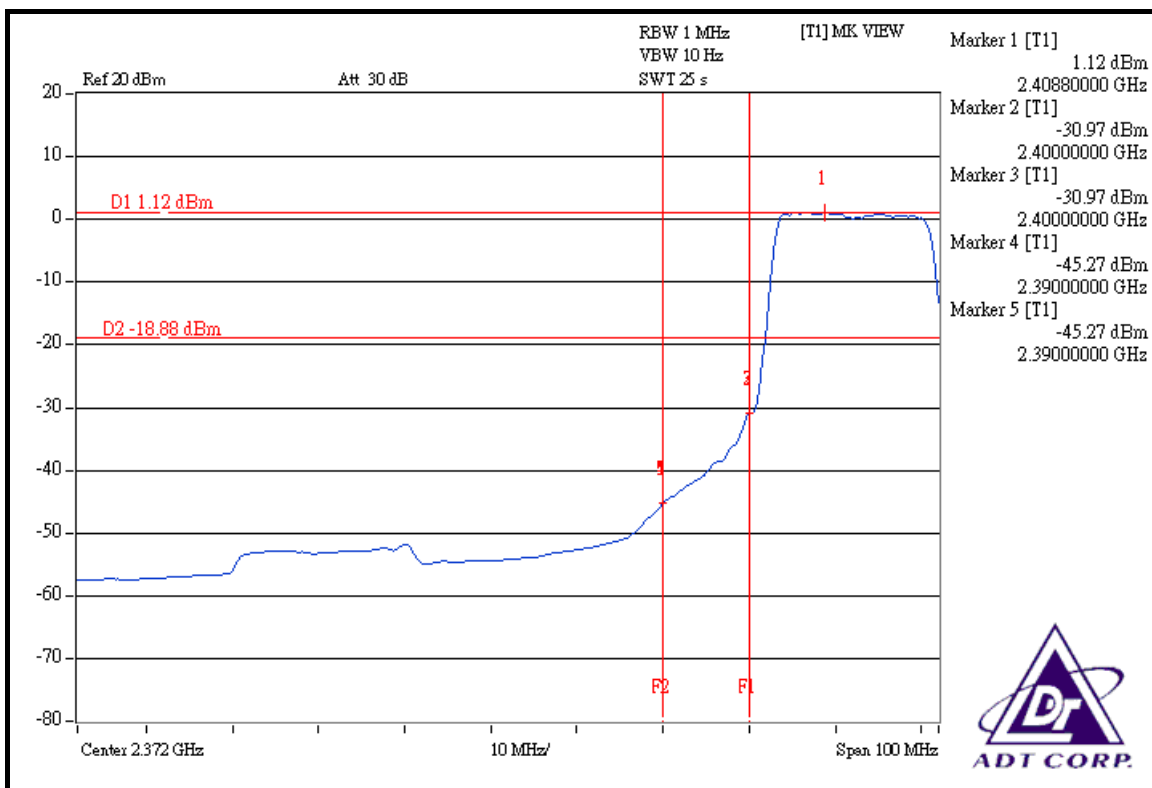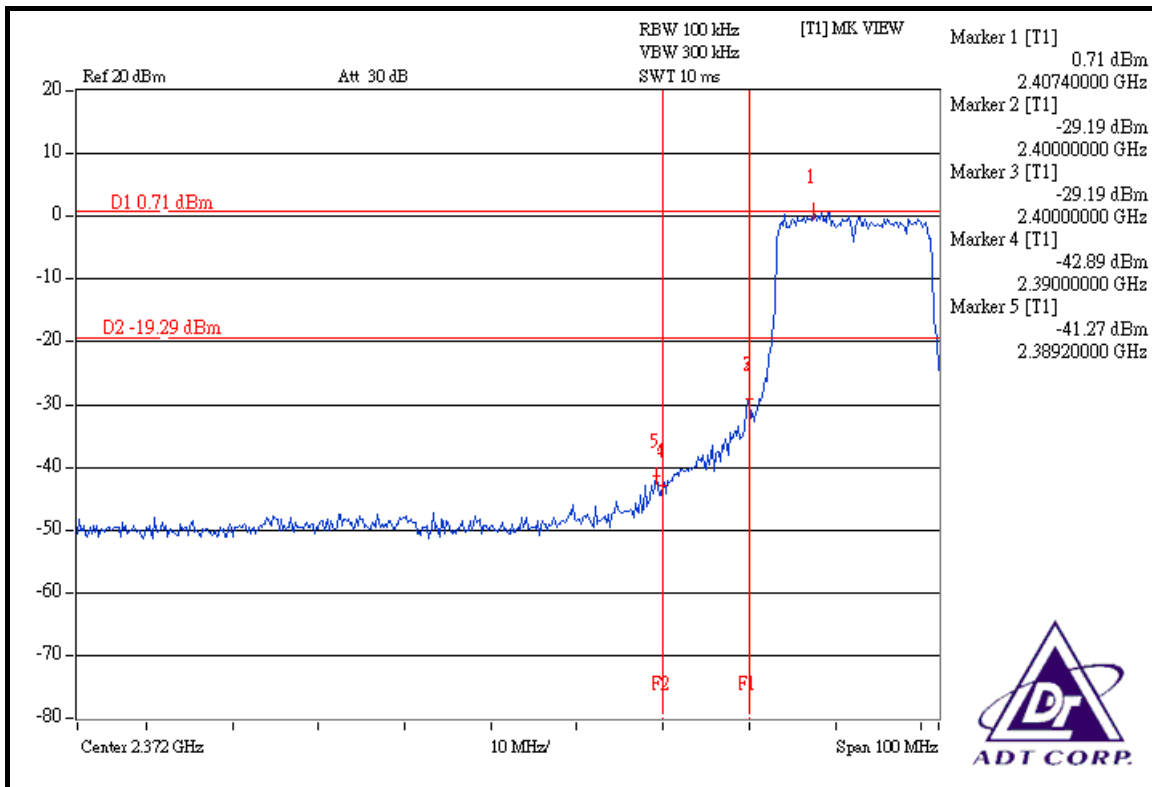

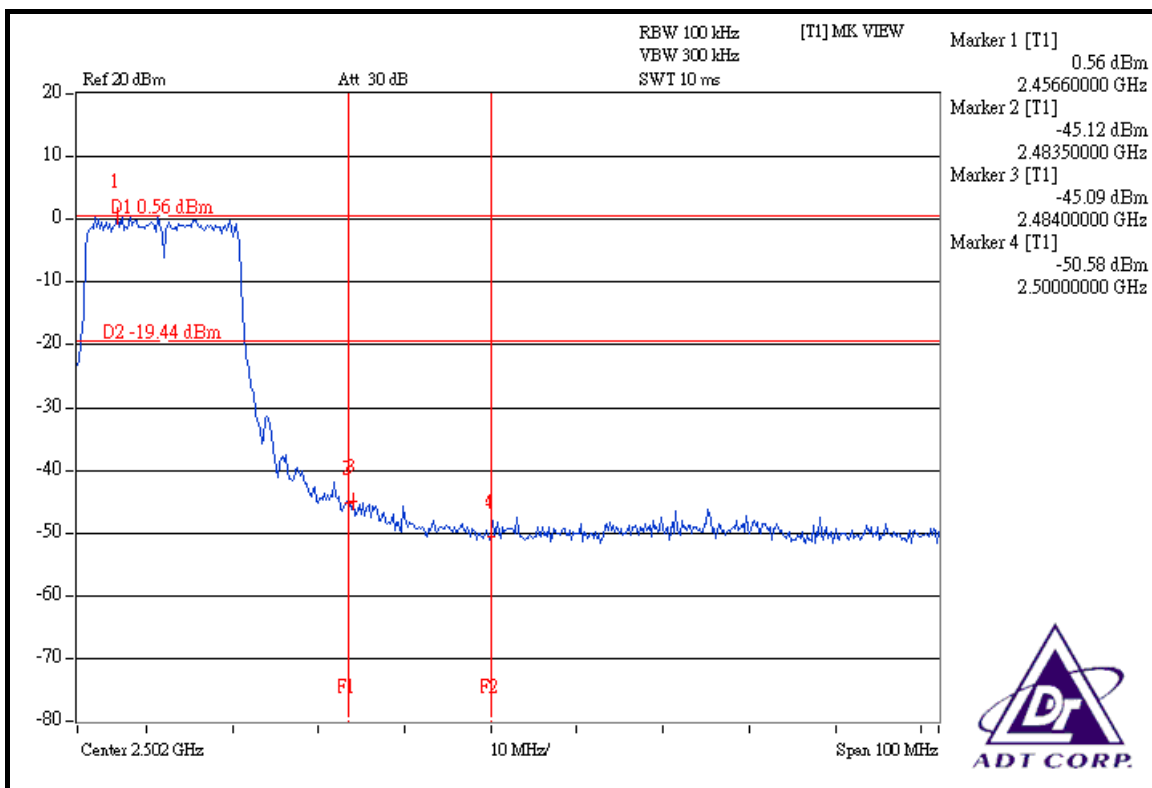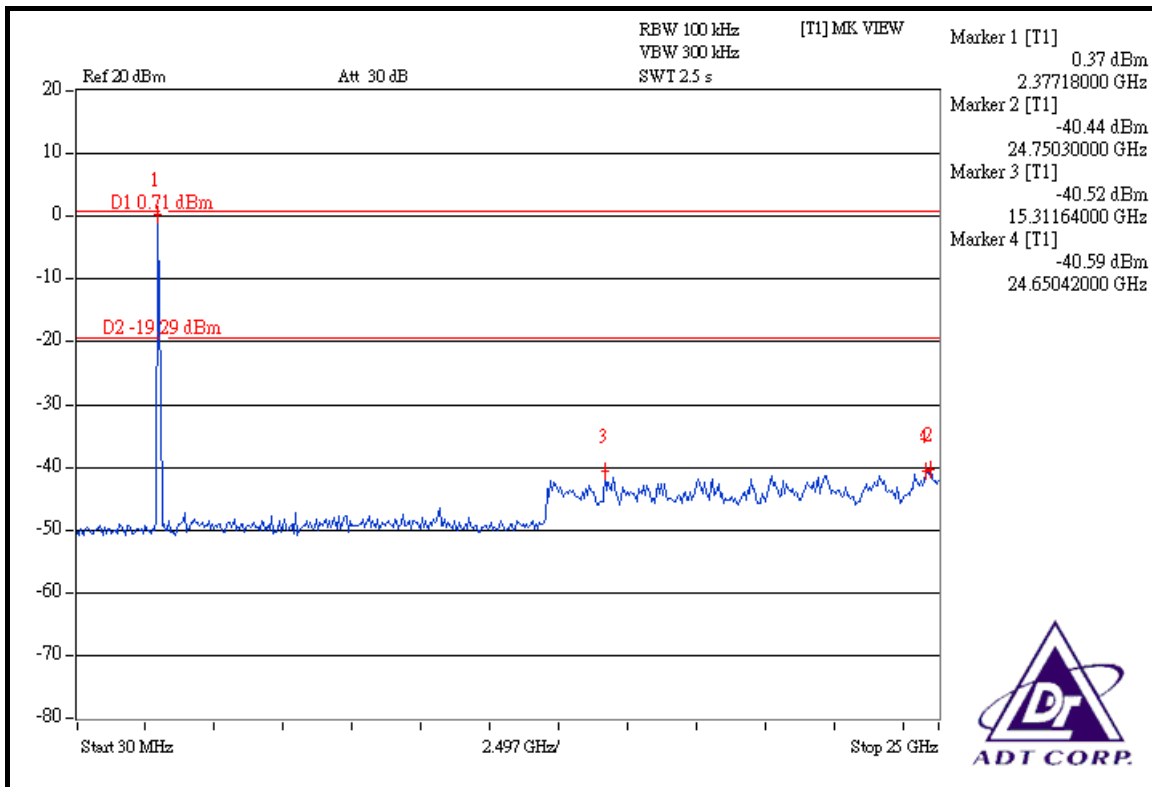

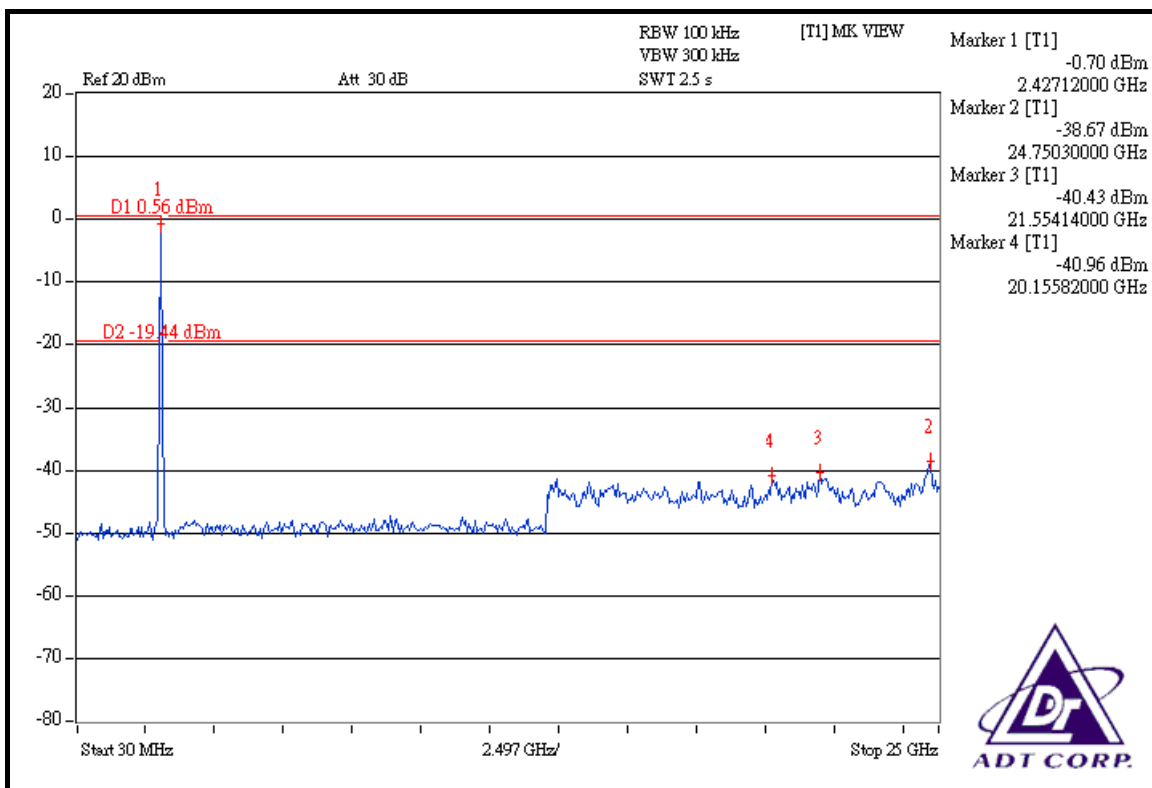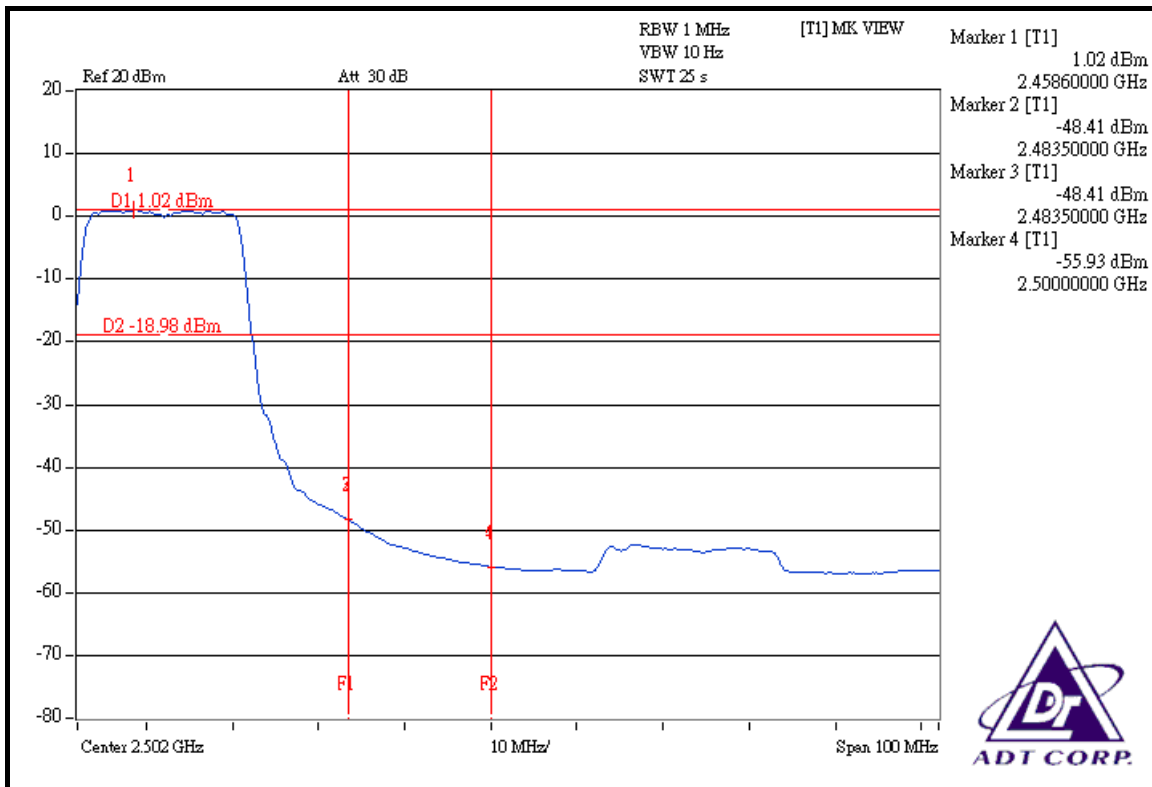

DRAFT 802.11n (40MHz) OFDM MODULATION

NOTE 1:



The band edge emission plot on the next page shows 36.93dBc between carrier maximum power and local maximum emission in restrict band (2.38960GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 107.16dBuV/m (Peak), so the maximum field strength in restrict band is $107.16 - 36.93 = 70.23$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 41.33dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 94.21dBuV/m (Average), so the maximum field strength in restrict band is $94.21 - 41.33 = 52.88$ dBuV/m which is under 54dBuV/m limit.



NOTE 2:

The band edge emission plot on the next second page shows 41.13dBc between carrier maximum power and local maximum emission in restrict band (2.48800GHz). The emission of carrier strength list in the test result of channel 7 at the item 4.2.7 is 107.95dBuV/m (Peak), so the maximum field strength in restrict band is $107.95 - 41.13 = 66.82$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 44.32dBc between carrier maximum power and local maximum emission in restrict band (2.48440GHz). The emission of carrier strength list in the test result of channel 7 at the item 4.2.7 is 95.36dBuV/m (Average), so the maximum field strength in restrict band is $95.36 - 44.32 = 51.04$ dBuV/m which is under 54dBuV/m limit.

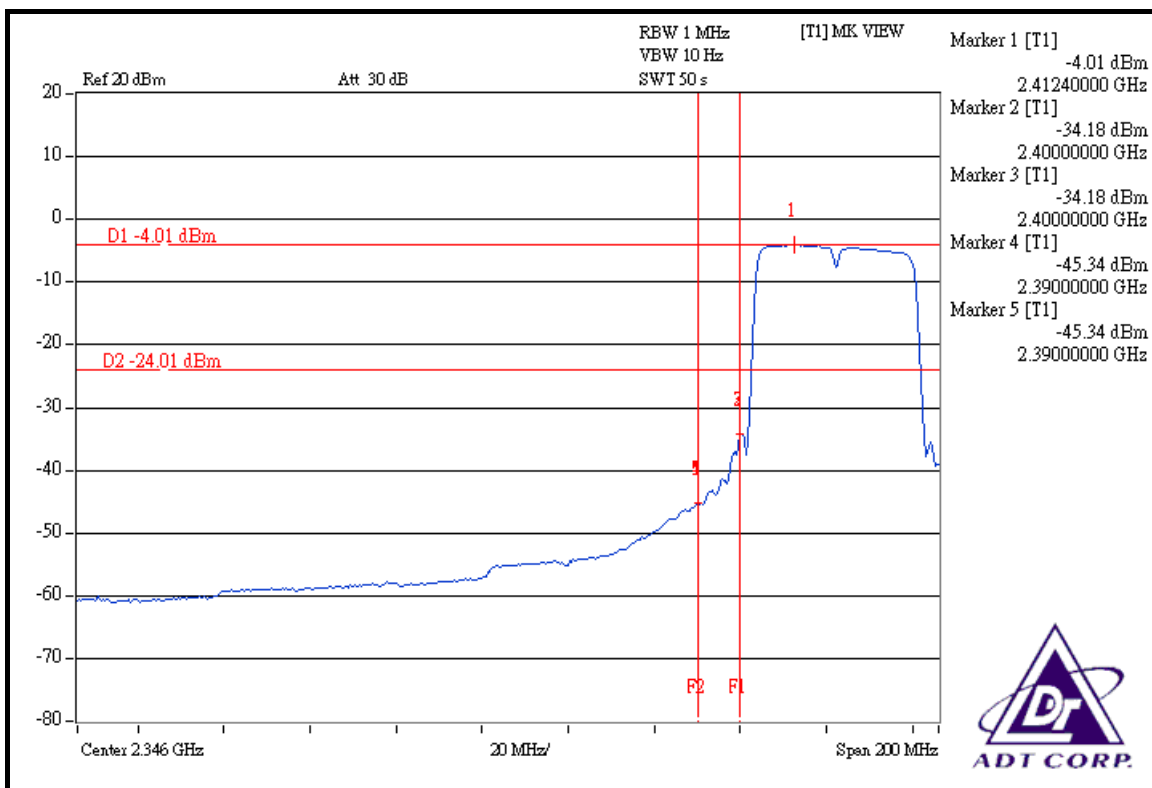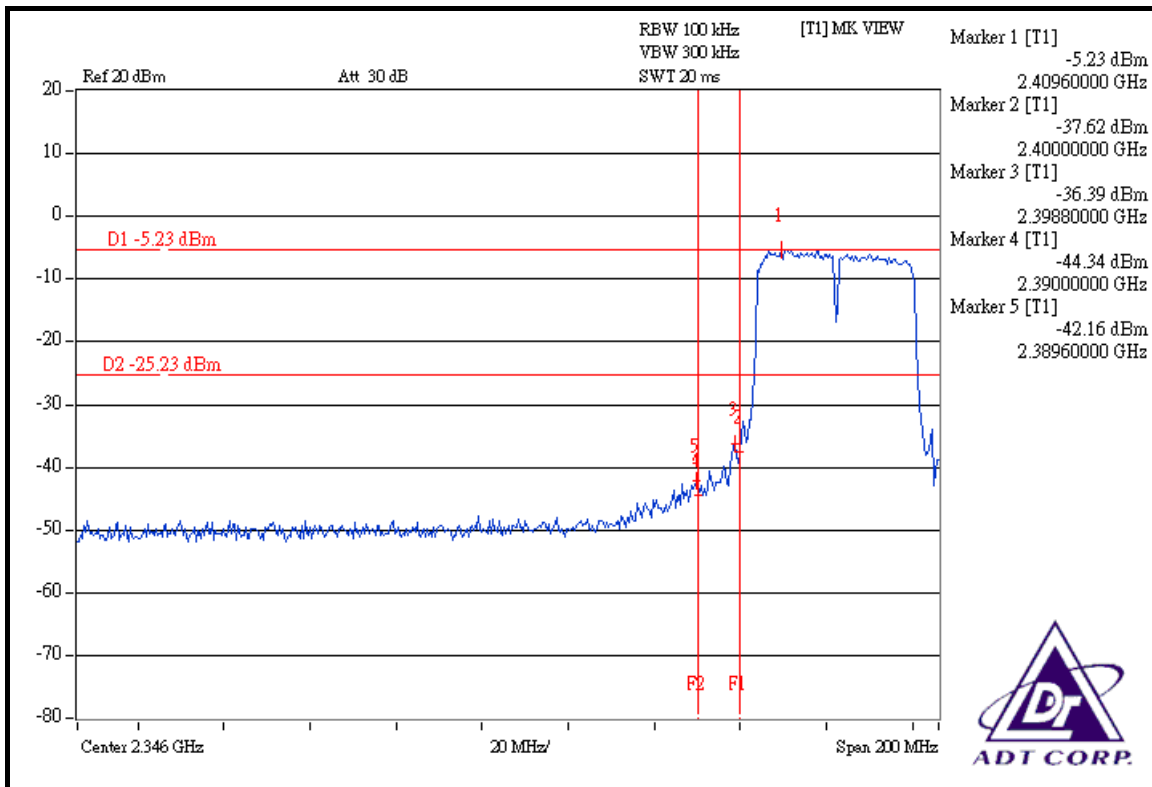

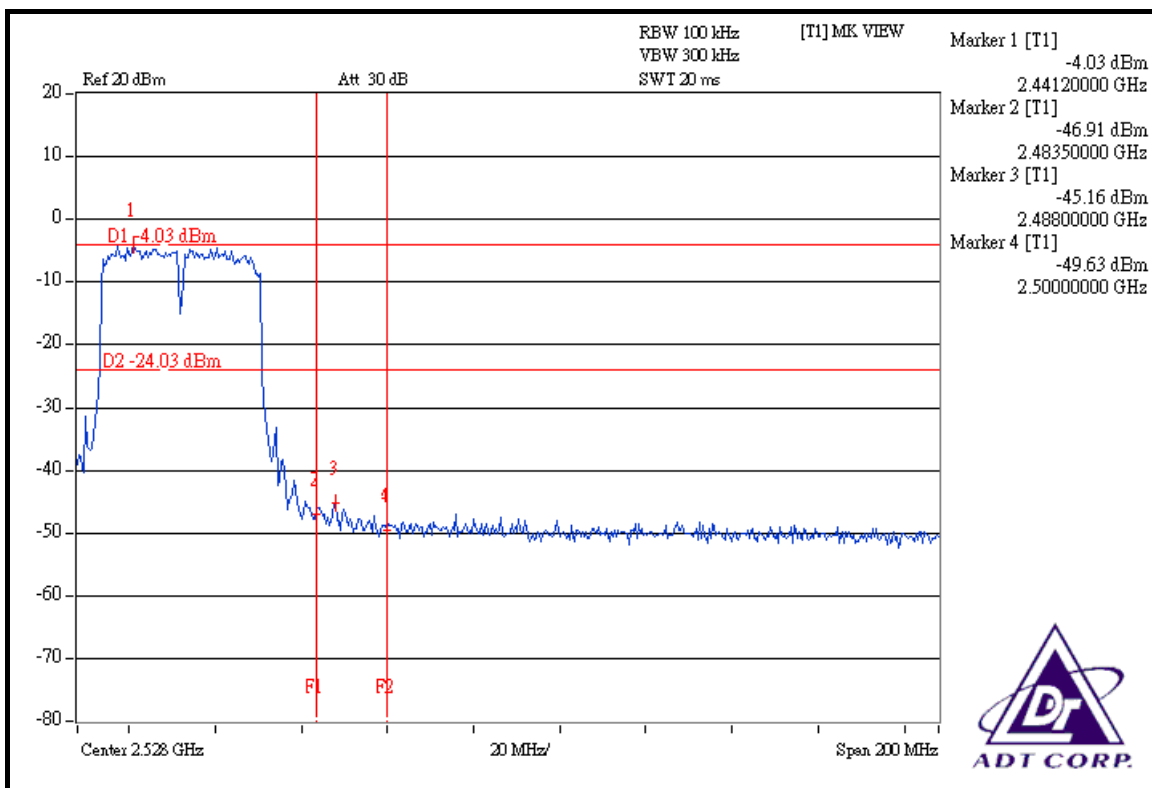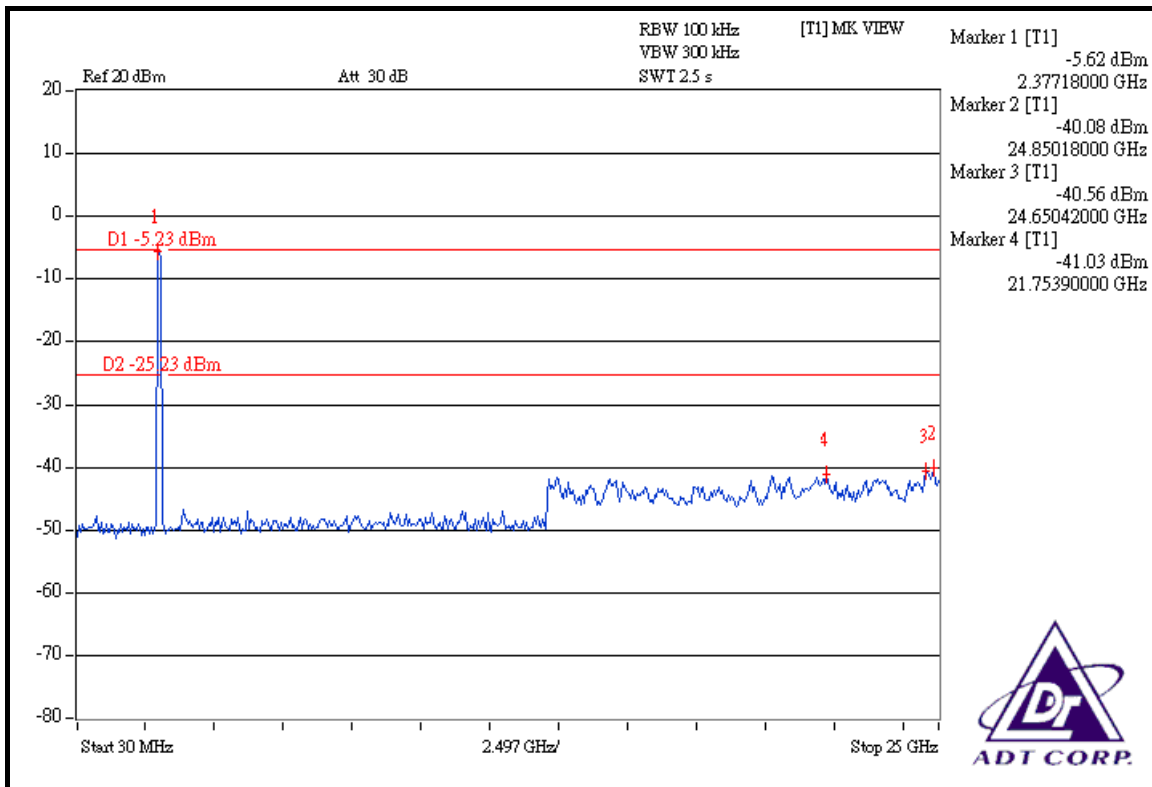

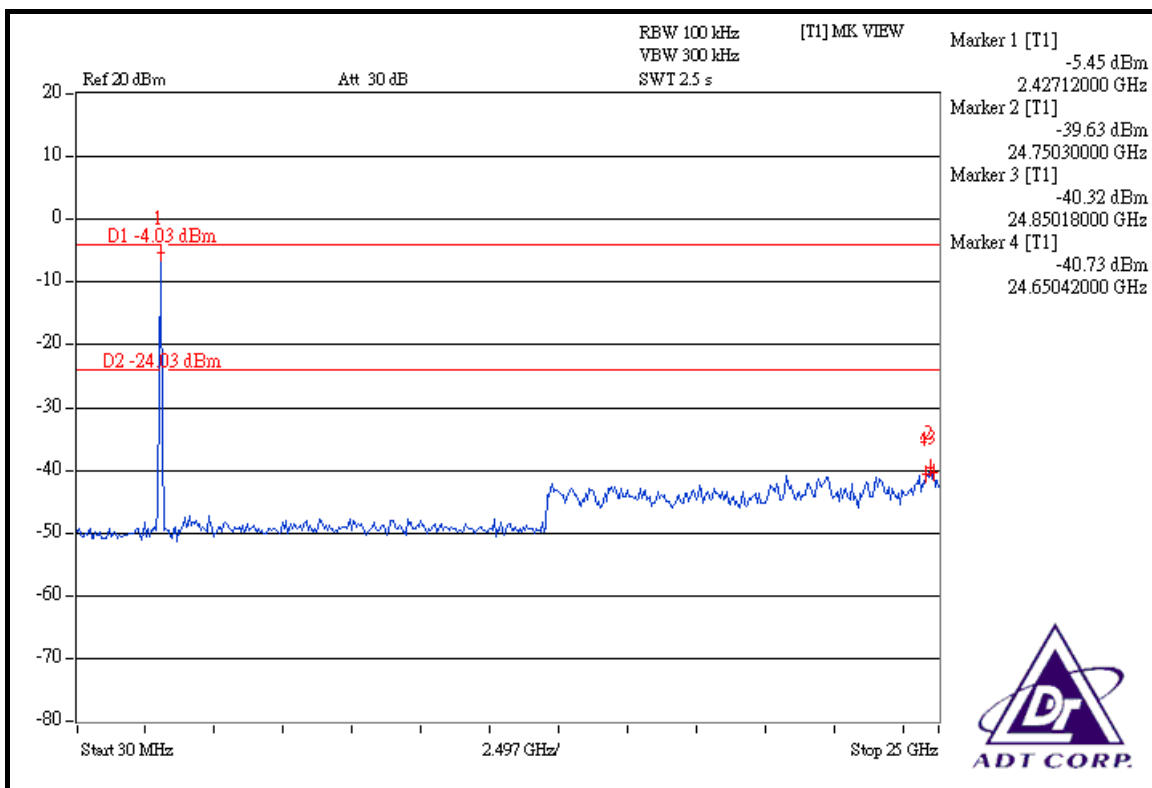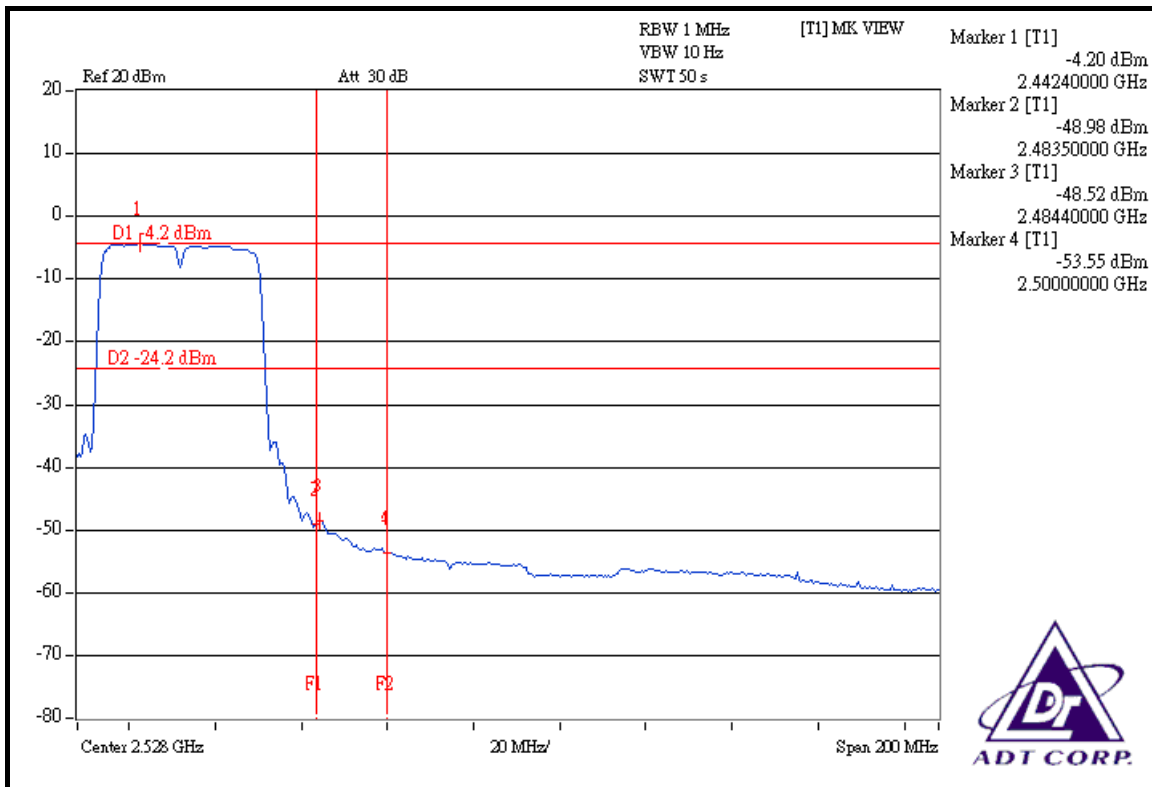



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is dipole antenna without connector. The maximum gain of the antenna is 2.3dBi.



5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



6. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	PSB, GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.