

FCC Test Report

Report No.: RF141229E04-1

FCC ID: Q87-WRT1200AC

Test Model: WRT1200AC

Received Date: Dec. 29, 2014

Test Date: Jan. 20 to Feb. 26, 2015

Issued Date: Mar. 13, 2015

Applicant: Linksys LLC

Address: 121 Theory Drive Irvine California 92617 United States

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan R.O.C.

Test Location (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan R.O.C.

Test Location (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty.....	6
2.2 Modification Record.....	6
3 General Information	7
3.1 General Description of EUT.....	7
3.2 Description of Test Modes.....	10
3.2.1 Test Mode Applicability and Tested Channel Detail.....	11
3.3 Duty Cycle of Test Signal.....	13
3.4 Description of Support Units.....	14
3.4.1 Configuration of System under Test.....	15
3.5 General Description of Applied Standards.....	16
4 Test Types and Results	17
4.1 Radiated Emission and Bandedge Measurement.....	17
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	17
4.1.2 Test Instruments.....	18
4.1.3 Test Procedures.....	20
4.1.4 Deviation from Test Standard.....	20
4.1.5 Test Setup.....	21
4.1.6 EUT Operating Conditions.....	21
4.1.7 Test Results.....	22
4.2 Conducted Emission Measurement.....	32
4.2.1 Limits of Conducted Emission Measurement.....	32
4.2.2 Test Instruments.....	32
4.2.3 Test Procedures.....	33
4.2.4 Deviation from Test Standard.....	33
4.2.5 Test Setup.....	33
4.2.6 Eut Operating Conditions.....	33
4.2.7 Test Results (Mode 1).....	34
4.2.8 Test Results (Mode 2).....	36
4.2.9 Test Results (Mode 3).....	38
4.2.10 Test Results (Mode 4).....	40
4.2.11 Test Results (Mode 5).....	42
4.2.12 Test Results (Mode 6).....	44
4.3 Transmit Power Measurement.....	46
4.3.1 Limits of Transmit Power Measurement.....	46
4.3.2 Test Setup.....	46
4.3.3 Test Instruments.....	46
4.3.4 Test Procedures.....	47
4.3.5 Deviation from Test Standard.....	47
4.3.6 EUT Operating Conditions.....	47
4.3.7 Test Results.....	48
4.4 Peak Power Spectral Density Measurement.....	49
4.4.1 Limits of Peak Power Spectral Density Measurement.....	49
4.4.2 Test Setup.....	49
4.4.3 Test Instruments.....	49
4.4.4 Test Procedures.....	49
4.4.5 Deviation from Test Standard.....	49
4.4.6 EUT Operating Conditions.....	49
4.4.7 Test Results.....	50
4.5 Frequency Stability Measurement.....	53
4.5.1 Limits of Frequency Stability Measurement.....	53



4.5.2 Test Setup.....	53
4.5.3 Test Instruments	53
4.5.4 Test Procedures.....	53
4.5.5 Deviation from Test Standard	53
4.5.6 EUT Operating Conditions.....	53
4.5.7 Test Results	54
5 Pictures of Test Arrangements.....	55
Appendix – Information on the Testing Laboratories	56



Release Control Record

Issue No.	Description	Date Issued
RF141229E04-1	Original release.	Mar. 13, 2015

1 Certificate of Conformity

Product: 802.11ac Router

Brand: Linksys

Test Model: WRT1200AC

Sample Status: ENGINEERING SAMPLE

Applicant: Linksys LLC

Test Date: Jan. 20 to Feb. 26, 2015

Standards: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10:2009

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : _____ , **Date:** Mar. 13, 2015
(Elsie Hsu, Specialist)

Approved by : _____ , **Date:** Mar. 13, 2015
(May Chen, Manager)

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (SECTION 15.407 Under New Rule)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(6)	AC Power Conducted Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -8.23dB at 0.17344MHz.
15.407(b) (1/2/3/4/6)	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.4dB at 5150.00MHz.
15.407(a)(1/2 /3)	Max Average Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(1/2 /3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(e)	6dB bandwidth	PASS	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is R-SMA not a standard connector.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.86 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.37 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	3.72 dB
	6GHz ~ 18GHz	4.00 dB
	18GHz ~ 40GHz	4.11 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	802.11ac Router
Brand	Linksys
Test Model	WRT1200AC
Status of EUT	ENGINEERING SAMPLE
Drive version	1.0.2.165474
Power Supply Rating	DC 12V from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT20 and VHT40 mode of 2.4GHz Band.
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.7Mbps
Operating Frequency	For 15.407 5GHz: 5.18 ~ 5.24GHz
	For 15.247 2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.745 ~ 5.825GHz
Number of Channel	For 15.407 4 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 2 for 802.11n (HT40), 802.11ac (VHT40) 1 for 802.11ac (VHT80)
	For 15.247 (2.4GHz) 11 for 802.11b, 802.11g, 802.11n (HT20), VHT20 7 for 802.11n (HT40), VHT40 For 15.247 (5GHz) 5 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 2 for 802.11n (HT40), 802.11ac (VHT40) 1 for 802.11ac (VHT80)

Output Power	For 15.407 802.11a: 928.803mW 802.11ac (VHT20): 914.962mW 802.11ac (VHT40): 431.559mW 802.11ac (VHT80): 79.822mW	
	For 15.247(2.4GHz) 802.11b: 938.114mW 802.11g: 669.703mW 802.11n (HT20): 595.132mW 802.11n (HT40): 187.976mW	
	For 15.247(5GHz) 802.11a: 974.638mW 802.11ac (VHT20): 959.49mW 802.11ac (VHT40): 930.55mW 802.11ac (VHT80): 322.057mW	
	Antenna Type	Please see NOTE
	Antenna Connector	Please see NOTE
Accessory Device	Adapter x1	
Data Cable Supplied	NA	

Note:

- 2.4GHz and 5GHz technology can transmit at same time.
- The EUT must be supplied with a power adapter and following three different models could be chosen as following table:

No	Brand	Model No.	Spec.
1	CWT	2ABL030F US	Input: 100-240V, 1.0A, 50/60Hz Output: 12V, 2.5A DC output cable: 1.8m, unshielded
2	LEI	MU30-5120250-A1	Input: 100-240V, 0.8A, 50/60Hz Output: 12V, 2.5A DC output cable: 1.8m, unshielded
3	LEI	MU30-P120250-A1	Input: 100-240V, 0.8A, 50/60Hz Output: 12V, 2.5A DC output cable: 1.8m, unshielded

Note: For radiated emissions test, the EUT was pre-tested with above adapters, the worst case was found in adapter 3. Therefore only the test data of the adapter was recorded in this report.

- The antennas provided to the EUT, please refer to the following table:

Transmitter Circuit	Brand	Gain (dBi)	Cable Loss (dB)	Net Gain (dBi)	Frequency Range (GHz to GHz)	Antenna Type	Connector Type
Chain (0)	LINKSYS	2.5	1	1.5	2.4 ~ 2.4835	DIPOLE	R-SMA
		2.6	1.6	1	5.15 ~ 5.25		
		3.8	1.9	1.9	5.725 ~ 5.85		
Chain (1)	LINKSYS	2.5	1	1.5	2.4 ~ 2.4835	DIPOLE	R-SMA
		2.6	1.5	1.1	5.15 ~ 5.25		
		3.8	2.1	1.7	5.725 ~ 5.85		

4. The EUT has two different Transformer types could be chosen and please refer the below table:

Type 1 (Vendor: MINGTEK)		
Vendor P/N	Vendor	Location
HN1878CG	MINGTEK	T1
HN3678CG	MINGTEK	T2, T3
Type 2 (Vendor: BOTHHAND)		
Vendor P/N	Vendor	Location
LG1P109N LF	BOTHHAND	T1
LG2P109N LF	BOTHHAND	T2, T3

From the above types, the worst radiated emission was found in **Type 2 (Vendor: BOTHHAND)**. Therefore only the test data of the type were recorded in this report.

5. The EUT incorporates a MIMO function with beamforming.

2.4GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11b	1 ~ 11Mbps	2TX*	2RX
802.11g	6 ~ 54Mbps	2TX	2RX
802.11n (HT20)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11n (HT40)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
VHT20	MCS0~8 Nss=1	2TX	2RX
	MCS0~8 Nss=2	2TX	2RX
VHT40	MCS0~9 Nss=1	2TX	2RX
	MCS0~9 Nss=2	2TX	2RX
5GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11a	6 ~ 54Mbps	2TX	2RX
802.11n (HT20)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11n (HT40)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11ac (VHT20)	MCS0~8 Nss= 1	2TX	2RX
	MCS0~8 Nss= 2	2TX	2RX
802.11ac (VHT40)	MCS0~9 Nss= 1	2TX	2RX
	MCS0~9 Nss= 2	2TX	2RX
802.11ac (VHT80)	MCS0~9 Nss= 1	2TX	2RX
	MCS0~9 Nss= 2	2TX	2RX

NOTE: 1. The modulation and bandwidth are similar for 802.11n mode for 20MHz / 40MHz and 802.11ac mode for 20MHz / 40MHz, therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

2. * From the above modulation modes, the 802.11b without beamforming.

6. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

FOR 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
42	5210MHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE $<$ 1G	PLC	APCM	
1	√	√	√	√	Adapter 3 + Type 2
2	-	-	√	-	Adapter 3 + Type 1
3	-	-	√	-	Adapter 2 + Type 2
4	-	-	√	-	Adapter 2 + Type 1
5	-	-	√	-	Adapter 1 + Type 2
6	-	-	√	-	Adapter 1 + Type 1

Where **RE \geq 1G**: Radiated Emission above 1GHz

RE $<$ 1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on **Y-plane** (for below 1GHz) and **X-plane** (for above 1GHz).

NOTE: "-" means no effect.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6
802.11ac (VHT20)	36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11ac (VHT40)	38 to 46	38, 46	OFDM	BPSK	13.5
802.11ac (VHT80)	42	42	OFDM	BPSK	29.3

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11ac (VHT40)	38 to 46	38	OFDM	BPSK	13.5

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11ac (VHT40)	38 to 46	38	OFDM	BPSK	13.5

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.





MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6
802.11ac (VHT20)	36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11ac (VHT40)	38 to 46	38, 46	OFDM	BPSK	13.5
802.11ac (VHT80)	42	42	OFDM	BPSK	29.3

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE \geq 1G	23deg. C, 67%RH	120Vac, 60Hz	Robert Cheng
RE<1G	22deg. C, 69%RH	120Vac, 60Hz	Tim Ho
PLC	20deg. C, 60%RH	120Vac, 60Hz	Barry Lee
APCM	25deg. C, 60%RH	120Vac, 60Hz	Anderson Chen

3.3 Duty Cycle of Test Signal

Duty cycle of test signal is 100 %, duty factor is not required.

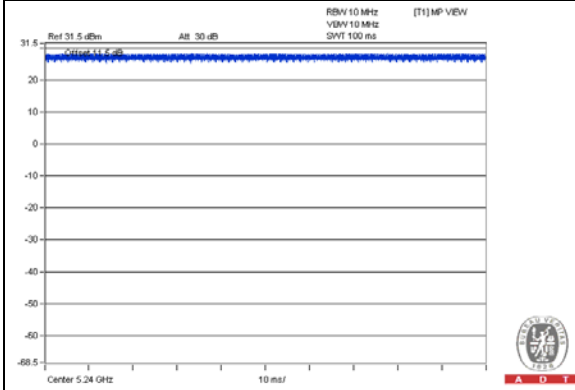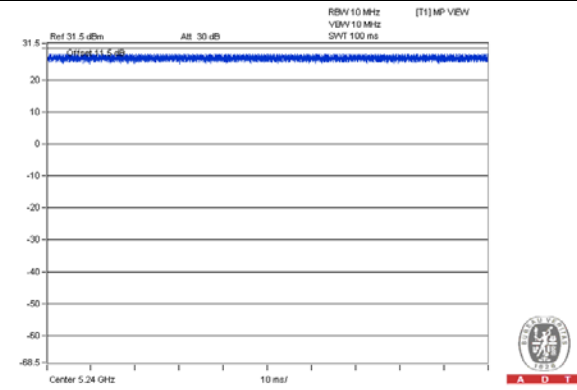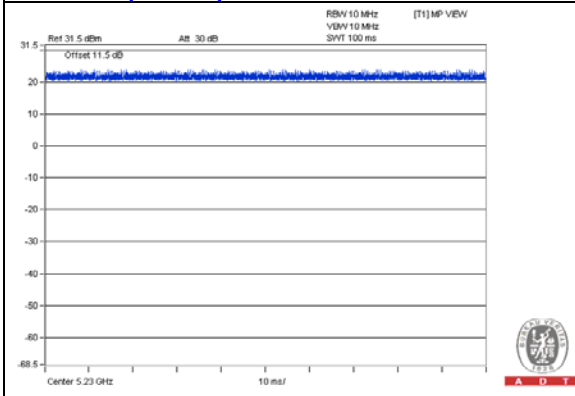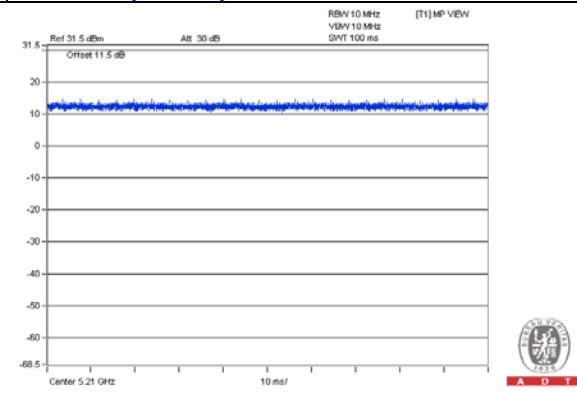802.11a**802.11ac (VHT20)****802.11ac (VHT40)****802.11ac (VHT80)**

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	iPod shuffle	Apple	MC749TA/A	CC4DMFKUDFDM	NA	Provided by Lab
B.	USB Dongle	Transcend	TS16GJF750K	NA	NA	Provided by Lab
C.	HUB	ZyXEL	ES-116P	S060H02000215	FCC DoC	Provided by Lab
D.	NOTEBOOK COMPUTER	DELL	PP32LA	GSLB32S	FCC DoC	Provided by Lab
E.	NOTEBOOK COMPUTER	DELL	D531	CN-0XM006-48643-86 L-4472	QDS-BRCM1019	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC power	1	1.8	No	0	Supplied by Client
2.	RJ-45	1	10	No	0	Provided by Lab
3.	RJ-45	3	10	No	0	Provided by Lab
4.	RJ-45	1	10	No	0	Provided by Lab
5.	USB	1	0.1	No	0	Provided by Lab

3.4.1 Configuration of System under Test

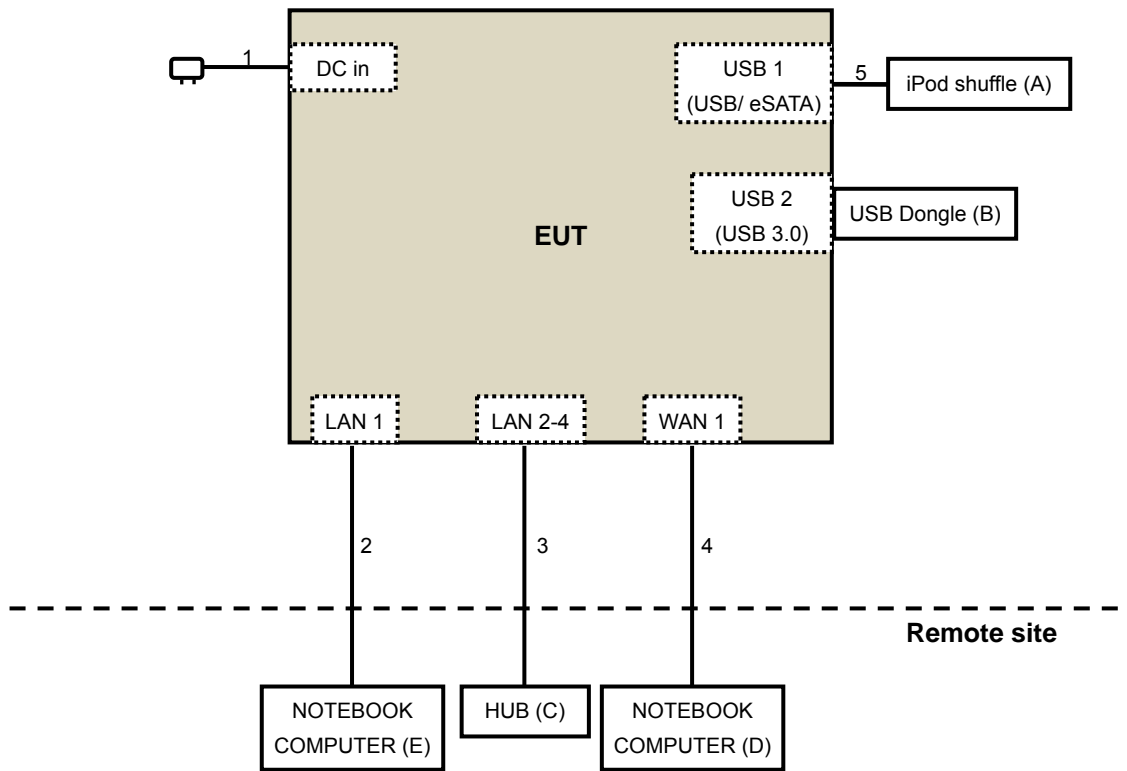

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

789033 D02 General UNII Test Procedures New Rules v01

662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

APPLICABLE TO	LIMIT	
789033 D02 General UNII Test Procedures New Rules v01	FIELD STRENGTH AT 3m	
	PK:74 (dBuV/m)	AV:54 (dBuV/m)
APPLICABLE TO	EIRP LIMIT	EQUIVALENT FIELD STRENGTH AT 3m
15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dBuV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)	PK:-27 (dBm/MHz) ^{*1} PK:-17 (dBm/MHz) ^{*2}	PK: 68.2(dBuV/m) ^{*1} PK:78.2 (dBuV/m) ^{*2}

NOTE: ^{*1} beyond 10MHz of the band edge ^{*2} within 10 MHz of band edge

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.2 Test Instruments

Below 1GHz

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
MXE EMI Receiver Agilent	N9038A	MY51210105	July 21, 2014	July 20, 2015
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 12, 2014	Nov. 11, 2015
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Feb. 06, 2015	Feb. 05, 2016
RF Cable	NA	CHGCAB_001	Oct. 04, 2014	Oct. 03, 2015
Horn_Antenna AISI	AIH.8018	0000320091110	Aug. 27, 2014	Aug. 26, 2015
Pre-Amplifier Agilent	8449B	3008A02578	June 24, 2014	June 23, 2015
RF Cable	NA	131205 131214 SNMY23684/4	Jan. 16, 2015	Jan. 15, 2016
Spectrum Analyzer R&S	FSV40	100964	July 05, 2014	July 04, 2015
Pre-Amplifier EMCI	EMC184045	980143	Jan. 16, 2015	Jan. 15, 2016
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Aug. 26, 2014	Aug. 25, 2015
RF Cable	NA	RF104-121 RF104-204	Dec. 11, 2014	Dec. 10, 2015
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
5. The VCCI Site Registration No. is G-137.
6. The CANADA Site Registration No. is IC 7450H-2.
7. Tested Date: Feb. 26, 2015

Above 1GHz test

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
MXE EMI Receiver Agilent	N9038A	MY51210105	July 21, 2014	July 20, 2015
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 12, 2014	Nov. 11, 2015
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Feb. 26, 2014	Feb. 25, 2015
RF Cable	NA	CHGCAB_001	Oct. 04, 2014	Oct. 03, 2015
Horn_Antenna AISI	AIH.8018	0000320091110	Aug. 27, 2014	Aug. 26, 2015
Pre-Amplifier Agilent	8449B	3008A02578	June 24, 2014	June 23, 2015
RF Cable	NA	131205 131214 SNMY23684/4	Jan. 16, 2015	Jan. 15, 2016
Spectrum Analyzer R&S	FSV40	100964	July 05, 2014	July 04, 2015
Pre-Amplifier EMCI	EMC184045	980143	Jan. 16, 2015	Jan. 15, 2016
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Aug. 26, 2014	Aug. 25, 2015
RF Cable	NA	RF104-121 RF104-204	Dec. 11, 2014	Dec. 10, 2015
Antenna Tower & Turn Table CT	NA	NA	NA	NA
SPECTRUM ANALYZER R&S	FSP 40	100060	May 08, 2014	May 07, 2015
Power meter Anritsu	ML2495A	1014008	Apr. 30, 2014	Apr. 29, 2015
Power sensor Anritsu	MA2411B	0917122	Apr. 30, 2014	Apr. 29, 2015
Temperature & Humidity Chamber GIANTFORCE	GTH-150-40-S P-AR	MAA0812-008	Jan. 12, 2015	Jan. 11, 2016

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
5. The VCCI Site Registration No. is G-137.
6. The CANADA Site Registration No. is IC 7450H-2.
7. Tested Date: Jan. 21, 2015

4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup

<Frequency Range below 1GHz>

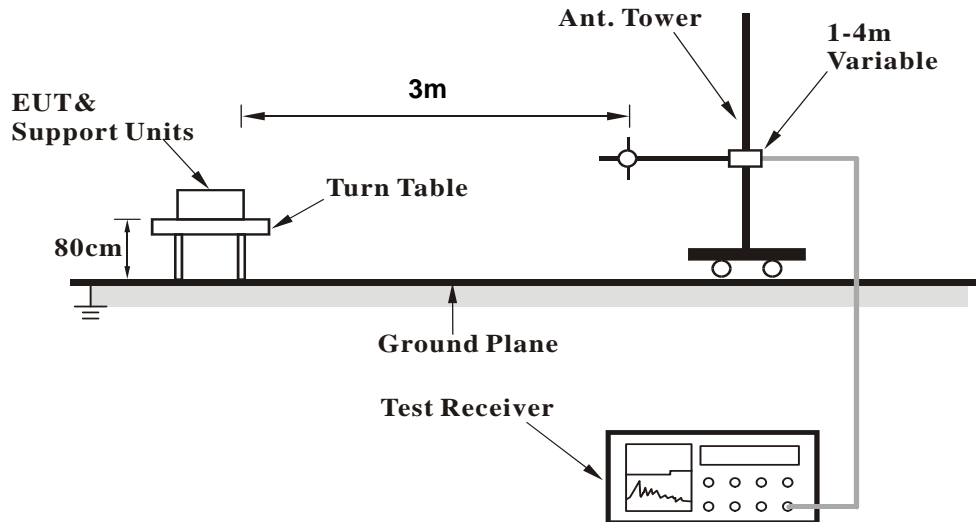

<Frequency Range above 1GHz>

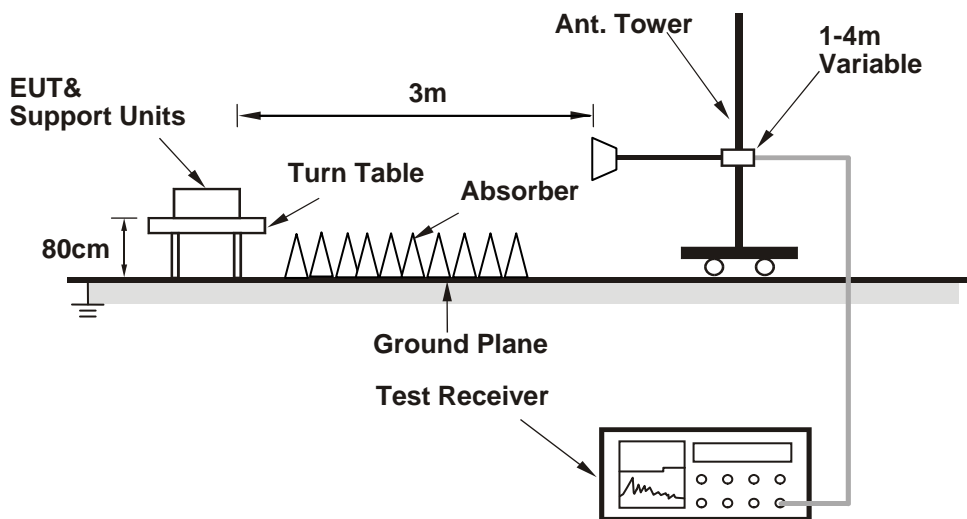

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

1. Connect the EUT with the support units D-E (Notebook computer) which is placed in remote site.
2. The communication partner run test program "DutApiMimoApApp.exe" to enable EUT under transmission/receiving condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz Data

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.5 PK	74.0	-10.5	1.14 H	3	56.70	6.80
2	5150.00	45.7 AV	54.0	-8.3	1.14 H	3	38.90	6.80
3	*5180.00	110.9 PK			1.20 H	123	103.95	6.95
4	*5180.00	101.3 AV			1.20 H	123	94.35	6.95
5	#10360.00	57.3 PK	74.0	-16.7	1.24 H	313	44.19	13.11
6	#10360.00	44.8 AV	54.0	-9.2	1.24 H	313	31.69	13.11
7	15540.00	59.4 PK	74.0	-14.6	1.09 H	91	40.71	18.69
8	15540.00	47.0 AV	54.0	-7.0	1.09 H	91	28.31	18.69

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	70.7 PK	74.0	-3.3	1.10 V	3	63.90	6.80
2	5150.00	52.9 AV	54.0	-1.1	1.10 V	3	46.10	6.80
3	*5180.00	117.6 PK			1.24 V	14	110.65	6.95
4	*5180.00	107.9 AV			1.24 V	14	100.95	6.95
5	#10360.00	57.3 PK	74.0	-16.7	1.23 V	328	44.19	13.11
6	#10360.00	45.2 AV	54.0	-8.8	1.23 V	328	32.09	13.11
7	15540.00	61.4 PK	74.0	-12.6	1.06 V	99	42.71	18.69
8	15540.00	49.2 AV	54.0	-4.8	1.06 V	99	30.51	18.69

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	62.1 PK	74.0	-11.9	1.18 H	5	55.30	6.80
2	5150.00	46.1 AV	54.0	-7.9	1.18 H	5	39.30	6.80
3	*5200.00	113.9 PK			1.25 H	109	106.85	7.05
4	*5200.00	105.0 AV			1.25 H	109	97.95	7.05
5	5438.00	54.8 PK	74.0	-19.2	1.17 H	111	46.98	7.82
6	5438.00	44.5 AV	54.0	-9.5	1.17 H	111	36.68	7.82
7	#10400.00	56.6 PK	74.0	-17.4	1.18 H	298	43.38	13.22
8	#10400.00	44.6 AV	54.0	-9.4	1.18 H	298	31.38	13.22
9	15600.00	60.0 PK	74.0	-14.0	1.15 H	77	41.30	18.70
10	15600.00	47.3 AV	54.0	-6.7	1.15 H	77	28.60	18.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.2 PK	74.0	-4.8	1.21 V	2	62.40	6.80
2	5150.00	53.2 AV	54.0	-0.8	1.21 V	2	46.40	6.80
3	*5200.00	121.4 PK			1.24 V	19	114.35	7.05
4	*5200.00	112.4 AV			1.24 V	19	105.35	7.05
5	5438.00	62.2 PK	74.0	-11.8	1.22 V	35	54.38	7.82
6	5438.00	51.8 AV	54.0	-2.2	1.22 V	35	43.98	7.82
7	#10400.00	57.4 PK	74.0	-16.6	1.23 V	320	44.18	13.22
8	#10400.00	45.4 AV	54.0	-8.6	1.23 V	320	32.18	13.22
9	15600.00	61.5 PK	74.0	-12.5	1.00 V	90	42.80	18.70
10	15600.00	49.1 AV	54.0	-4.9	1.00 V	90	30.40	18.70

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	116.5 PK			1.25 H	123	109.34	7.16
2	*5240.00	107.6 AV			1.25 H	123	100.44	7.16
3	5403.00	57.4 PK	74.0	-16.6	1.11 H	4	49.68	7.72
4	5403.00	46.3 AV	54.0	-7.7	1.11 H	4	38.58	7.72
5	#5478.00	58.3 PK	74.0	-15.7	1.20 H	114	50.35	7.95
6	#5478.00	46.4 AV	54.0	-7.6	1.20 H	114	38.45	7.95
7	#10480.00	57.3 PK	74.0	-16.7	1.24 H	301	44.14	13.16
8	#10480.00	45.4 AV	54.0	-8.6	1.24 H	301	32.24	13.16
9	15720.00	60.6 PK	74.0	-13.4	1.14 H	100	42.20	18.40
10	15720.00	48.3 AV	54.0	-5.7	1.14 H	100	29.90	18.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	123.8 PK			1.23 V	11	116.64	7.16
2	*5240.00	114.7 AV			1.23 V	11	107.54	7.16
3	5403.00	64.2 PK	74.0	-9.8	1.12 V	36	56.48	7.72
4	5403.00	53.2 AV	54.0	-0.8	1.12 V	36	45.48	7.72
5	#5478.00	65.1 PK	74.0	-8.9	1.00 V	36	57.15	7.95
6	#5478.00	53.4 AV	54.0	-0.6	1.00 V	36	45.45	7.95
7	#10480.00	57.5 PK	74.0	-16.5	1.29 V	332	44.34	13.16
8	#10480.00	45.5 AV	54.0	-8.5	1.29 V	332	32.34	13.16
9	15720.00	61.8 PK	74.0	-12.2	1.00 V	94	43.40	18.40
10	15720.00	49.2 AV	54.0	-4.8	1.00 V	94	30.80	18.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT20)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.7 PK	74.0	-10.3	1.16 H	5	56.90	6.80
2	5150.00	45.3 AV	54.0	-8.7	1.16 H	5	38.50	6.80
3	*5180.00	110.8 PK			1.15 H	124	103.85	6.95
4	*5180.00	100.9 AV			1.15 H	124	93.95	6.95
5	#10360.00	57.9 PK	74.0	-16.1	1.26 H	312	44.79	13.11
6	#10360.00	45.5 AV	54.0	-8.5	1.26 H	312	32.39	13.11
7	15540.00	60.1 PK	74.0	-13.9	1.13 H	105	41.41	18.69
8	15540.00	47.4 AV	54.0	-6.6	1.13 H	105	28.71	18.69

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	71.3 PK	74.0	-2.7	1.21 V	19	64.50	6.80
2	5150.00	52.7 AV	54.0	-1.3	1.21 V	19	45.90	6.80
3	*5180.00	118.1 PK			1.20 V	5	111.15	6.95
4	*5180.00	108.3 AV			1.20 V	5	101.35	6.95
5	#10360.00	57.8 PK	74.0	-16.2	1.32 V	349	44.69	13.11
6	#10360.00	45.8 AV	54.0	-8.2	1.32 V	349	32.69	13.11
7	15540.00	61.4 PK	74.0	-12.6	1.00 V	80	42.71	18.69
8	15540.00	49.0 AV	54.0	-5.0	1.00 V	80	30.31	18.69

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	62.7 PK	74.0	-11.3	1.12 H	111	55.90	6.80
2	5150.00	46.6 AV	54.0	-7.4	1.12 H	111	39.80	6.80
3	*5200.00	114.0 PK			1.23 H	134	106.95	7.05
4	*5200.00	105.5 AV			1.23 H	134	98.45	7.05
5	#5479.00	55.4 PK	74.0	-18.6	1.24 H	143	47.45	7.95
6	#5479.00	44.8 AV	54.0	-9.2	1.24 H	143	36.85	7.95
7	#10400.00	57.9 PK	74.0	-16.1	1.29 H	307	44.68	13.22
8	#10400.00	45.8 AV	54.0	-8.2	1.29 H	307	32.58	13.22
9	15600.00	59.7 PK	74.0	-14.3	1.12 H	100	41.00	18.70
10	15600.00	47.4 AV	54.0	-6.6	1.12 H	100	28.70	18.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.1 PK	74.0	-4.9	1.21 V	120	62.30	6.80
2	5150.00	53.2 AV	54.0	-0.8	1.21 V	120	46.40	6.80
3	*5200.00	121.3 PK			1.19 V	4	114.25	7.05
4	*5200.00	112.6 AV			1.19 V	4	105.55	7.05
5	5438.00	62.3 PK	74.0	-11.7	1.22 V	34	54.48	7.82
6	5438.00	51.8 AV	54.0	-2.2	1.22 V	34	43.98	7.82
7	#10400.00	58.3 PK	74.0	-15.7	1.28 V	341	45.08	13.22
8	#10400.00	46.3 AV	54.0	-7.7	1.28 V	341	33.08	13.22
9	15600.00	60.9 PK	74.0	-13.1	1.00 V	99	42.20	18.70
10	15600.00	48.2 AV	54.0	-5.8	1.00 V	99	29.50	18.70

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	116.8 PK			1.21 H	138	109.64	7.16
2	*5240.00	107.9 AV			1.21 H	138	100.74	7.16
3	5403.00	57.3 PK	74.0	-16.7	1.09 H	10	49.58	7.72
4	5403.00	46.7 AV	54.0	-7.3	1.09 H	10	38.98	7.72
5	#5479.00	57.1 PK	74.0	-16.9	1.26 H	129	49.15	7.95
6	#5479.00	45.8 AV	54.0	-8.2	1.26 H	129	37.85	7.95
7	#10480.00	57.6 PK	74.0	-16.4	1.22 H	328	44.44	13.16
8	#10480.00	45.4 AV	54.0	-8.6	1.22 H	328	32.24	13.16
9	15720.00	60.3 PK	74.0	-13.7	1.05 H	96	41.90	18.40
10	15720.00	47.8 AV	54.0	-6.2	1.05 H	96	29.40	18.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	124.3 PK			1.20 V	4	117.14	7.16
2	*5240.00	115.1 AV			1.20 V	4	107.94	7.16
3	5403.00	64.2 PK	74.0	-9.8	1.03 V	32	56.48	7.72
4	5403.00	53.6 AV	54.0	-0.4	1.03 V	32	45.88	7.72
5	#5479.00	64.6 PK	74.0	-9.4	1.00 V	31	56.65	7.95
6	#5479.00	53.0 AV	54.0	-1.0	1.00 V	31	45.05	7.95
7	#10480.00	57.2 PK	74.0	-16.8	1.28 V	313	44.04	13.16
8	#10480.00	45.1 AV	54.0	-8.9	1.28 V	313	31.94	13.16
9	15720.00	61.6 PK	74.0	-12.4	1.04 V	86	43.20	18.40
10	15720.00	49.0 AV	54.0	-5.0	1.04 V	86	30.60	18.40

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.
- " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT40)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.9 PK	74.0	-14.1	1.09 H	125	53.10	6.80
2	5150.00	46.9 AV	54.0	-7.1	1.09 H	125	40.10	6.80
3	*5190.00	104.5 PK			1.22 H	132	97.50	7.00
4	*5190.00	95.7 AV			1.22 H	132	88.70	7.00
5	#10380.00	57.9 PK	74.0	-16.1	1.22 H	307	44.73	13.17
6	#10380.00	45.5 AV	54.0	-8.5	1.22 H	307	32.33	13.17
7	15570.00	60.7 PK	74.0	-13.3	1.06 H	91	42.01	18.69
8	15570.00	48.3 AV	54.0	-5.7	1.06 H	91	29.61	18.69

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.8 PK	74.0	-7.2	1.09 V	2	60.00	6.80
2	5150.00	53.6 AV	54.0	-0.4	1.09 V	2	46.80	6.80
3	*5190.00	111.5 PK			1.21 V	0	104.50	7.00
4	*5190.00	102.7 AV			1.21 V	0	95.70	7.00
5	#10380.00	57.5 PK	74.0	-16.5	1.24 V	311	44.33	13.17
6	#10380.00	45.1 AV	54.0	-8.9	1.24 V	311	31.93	13.17
7	15570.00	61.8 PK	74.0	-12.2	1.09 V	75	43.11	18.69
8	15570.00	48.9 AV	54.0	-5.1	1.09 V	75	30.21	18.69

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	60.2 PK	74.0	-13.8	1.27 H	96	53.40	6.80
2	5150.00	45.8 AV	54.0	-8.2	1.27 H	96	39.00	6.80
3	*5230.00	110.0 PK			1.23 H	108	102.88	7.12
4	*5230.00	101.2 AV			1.23 H	108	94.08	7.12
5	5350.00	54.9 PK	74.0	-19.1	1.12 H	100	47.41	7.49
6	5350.00	42.6 AV	54.0	-11.4	1.12 H	100	35.11	7.49
7	5383.00	53.5 PK	74.0	-20.5	1.20 H	112	45.87	7.63
8	5383.00	40.1 AV	54.0	-13.9	1.20 H	112	32.47	7.63
9	#10460.00	57.2 PK	74.0	-16.8	1.29 H	329	44.02	13.18
10	#10460.00	45.2 AV	54.0	-8.8	1.29 H	329	32.02	13.18
11	15690.00	60.6 PK	74.0	-13.4	1.09 H	89	42.22	18.38
12	15690.00	48.0 AV	54.0	-6.0	1.09 H	89	29.62	18.38

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.6 PK	74.0	-6.4	1.09 V	3	60.80	6.80
2	5150.00	53.2 AV	54.0	-0.8	1.09 V	3	46.40	6.80
3	*5230.00	116.3 PK			1.19 V	0	109.18	7.12
4	*5230.00	107.8 AV			1.19 V	0	100.68	7.12
5	5350.00	54.8 PK	74.0	-19.2	1.19 V	0	47.31	7.49
6	5350.00	42.3 AV	54.0	-11.7	1.19 V	0	34.81	7.49
7	5383.00	61.1 PK	74.0	-12.9	1.10 V	15	53.47	7.63
8	5383.00	47.6 AV	54.0	-6.4	1.10 V	15	39.97	7.63
9	#10460.00	57.0 PK	74.0	-17.0	1.29 V	328	43.82	13.18
10	#10460.00	45.0 AV	54.0	-9.0	1.29 V	328	31.82	13.18
11	15690.00	61.5 PK	74.0	-12.5	1.07 V	72	43.12	18.38
12	15690.00	48.7 AV	54.0	-5.3	1.07 V	72	30.32	18.38

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT80)

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.0 PK	74.0	-15.0	1.13 H	3	52.20	6.80
2	5150.00	46.0 AV	54.0	-8.0	1.13 H	3	39.20	6.80
3	*5210.00	99.3 PK			1.18 H	108	92.24	7.06
4	*5210.00	90.4 AV			1.18 H	108	83.34	7.06
5	5350.00	55.0 PK	74.0	-19.0	1.21 H	120	47.51	7.49
6	5350.00	42.9 AV	54.0	-11.1	1.21 H	120	35.41	7.49
7	#10420.00	58.0 PK	74.0	-16.0	1.23 H	302	44.80	13.20
8	#10420.00	45.6 AV	54.0	-8.4	1.23 H	302	32.40	13.20
9	15630.00	60.6 PK	74.0	-13.4	1.07 H	90	42.00	18.60
10	15630.00	48.0 AV	54.0	-6.0	1.07 H	90	29.40	18.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.7 PK	74.0	-8.3	1.08 V	2	58.90	6.80
2	5150.00	52.8 AV	54.0	-1.2	1.08 V	2	46.00	6.80
3	*5210.00	106.4 PK			1.20 V	8	99.34	7.06
4	*5210.00	97.4 AV			1.20 V	8	90.34	7.06
5	5350.00	54.7 PK	74.0	-19.3	1.08 V	2	47.21	7.49
6	5350.00	42.3 AV	54.0	-11.7	1.08 V	2	34.81	7.49
7	#10420.00	57.5 PK	74.0	-16.5	1.22 V	319	44.30	13.20
8	#10420.00	45.4 AV	54.0	-8.6	1.22 V	319	32.20	13.20
9	15630.00	61.6 PK	74.0	-12.4	1.05 V	90	43.00	18.60
10	15630.00	49.1 AV	54.0	-4.9	1.05 V	90	30.50	18.60

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Below 1GHz Data

802.11ac (VHT40)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	61.67	34.7 QP	40.0	-5.3	1.50 H	37	48.63	-13.97
2	220.41	38.9 QP	46.0	-7.1	1.50 H	356	54.67	-15.74
3	562.48	35.2 QP	46.0	-10.8	1.50 H	178	40.61	-5.43
4	625.00	39.7 QP	46.0	-6.3	1.00 H	260	43.36	-3.68
5	687.51	32.2 QP	46.0	-13.8	1.00 H	326	35.08	-2.85
6	875.02	34.3 QP	46.0	-11.7	1.00 H	178	33.98	0.31

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	38.28	36.7 QP	40.0	-3.3	1.00 V	47	50.36	-13.64
2	62.35	36.1 QP	40.0	-4.0	1.00 V	328	50.11	-14.06
3	220.61	40.5 QP	46.0	-5.6	1.00 V	107	56.19	-15.74
4	562.48	38.0 QP	46.0	-8.0	1.00 V	192	43.39	-5.43
5	625.00	34.2 QP	46.0	-11.8	1.00 V	275	37.84	-3.68
6	875.02	34.7 QP	46.0	-11.3	1.00 V	173	34.37	0.31

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	100375	Apr. 29, 2014	Apr. 28, 2015
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK-8127	8127-522	Sep. 15, 2014	Sep. 14, 2015
Line-Impedance Stabilization Network (for Peripheral) ROHDE & SCHWARZ	ENV216	100071	Nov. 10, 2014	Nov. 09, 2015
RF Cable (JYEBAO)	5DFB	COCCAB-001	Mar. 10, 2014	Mar. 09, 2015
50 ohms Terminator	N/A	EMC-03	Sep. 22, 2014	Sep. 21, 2015
50 ohms Terminator	N/A	EMC-02	Sep. 30, 2014	Sep. 29, 2015
Software ADT	BV ADT_Cond_V7.3.7. 3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: Feb. 26, 2015

4.2.3 Test Procedures


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

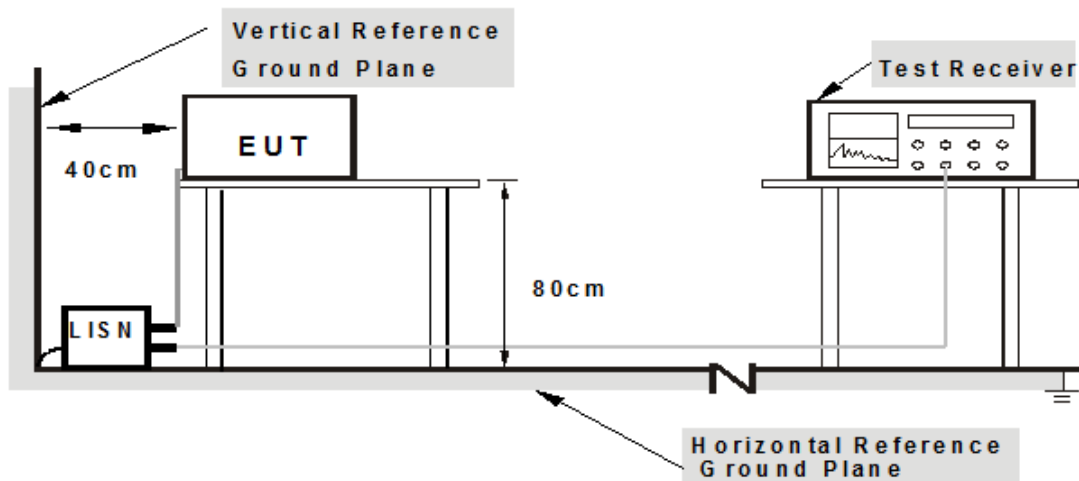

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 Eut Operating Conditions

Same as 4.1.6.


4.2.7 Test Results (Mode 1)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.17734	0.07	54.68	44.38	54.75	44.45	64.61	54.61	-9.86	-10.16
2	0.22812	0.07	45.65	27.57	45.72	27.64	62.52	52.52	-16.80	-24.88
3	0.54063	0.10	40.19	31.46	40.29	31.56	56.00	46.00	-15.71	-14.44
4	0.97031	0.13	31.54	19.59	31.67	19.72	56.00	46.00	-24.33	-26.28
5	2.10156	0.18	31.92	19.51	32.10	19.69	56.00	46.00	-23.90	-26.31
6	14.09766	0.56	35.75	30.18	36.31	30.74	60.00	50.00	-23.69	-19.26

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

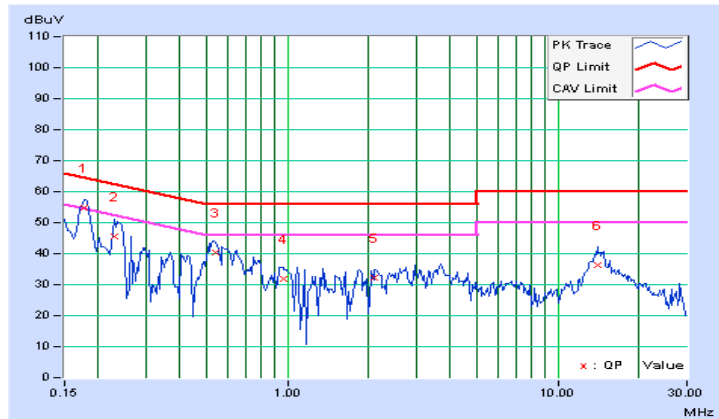


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17344	0.06	54.53	41.69	54.59	41.75	64.79	54.79	-10.20	-13.04
2	0.23984	0.07	46.66	37.86	46.73	37.93	62.10	52.10	-15.38	-14.18
3	0.54063	0.10	42.66	33.94	42.76	34.04	56.00	46.00	-13.24	-11.96
4	0.96250	0.13	35.54	23.62	35.67	23.75	56.00	46.00	-20.33	-22.25
5	3.75781	0.25	32.57	20.18	32.82	20.43	56.00	46.00	-23.18	-25.57
6	14.45313	0.59	34.30	28.15	34.89	28.74	60.00	50.00	-25.11	-21.26

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

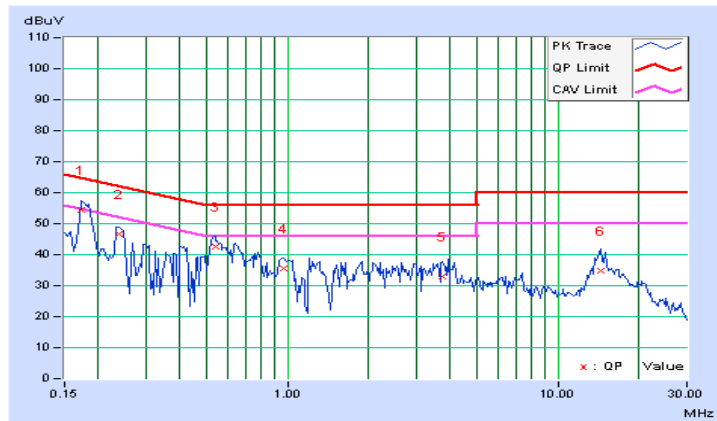


4.2.8 Test Results (Mode 2)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.17344	0.07	56.50	45.00	56.57	45.07	64.79	54.79	-8.23	-9.73
2	0.22812	0.07	49.74	37.76	49.81	37.83	62.52	52.52	-12.71	-14.69
3	0.52891	0.10	40.47	30.60	40.57	30.70	56.00	46.00	-15.43	-15.30
4	0.99766	0.13	31.54	20.40	31.67	20.53	56.00	46.00	-24.33	-25.47
5	3.76563	0.24	30.76	20.44	31.00	20.68	56.00	46.00	-25.00	-25.32
6	14.37891	0.57	35.21	29.52	35.78	30.09	60.00	50.00	-24.22	-19.91

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

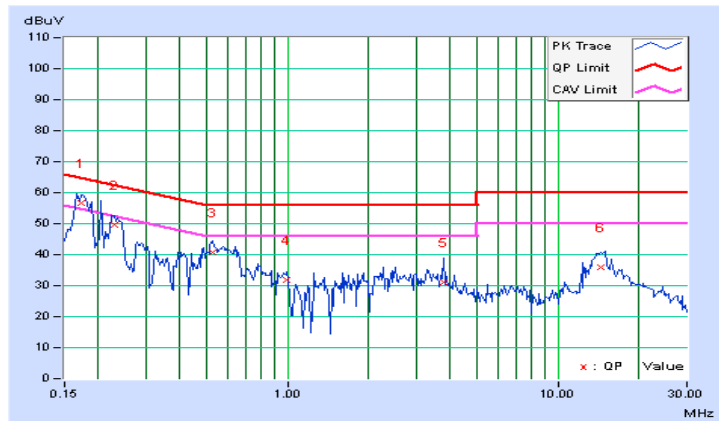


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.16953	0.06	56.20	44.50	56.26	44.56	64.98	54.98	-8.72	-10.42
2	0.22812	0.06	48.99	37.88	49.05	37.94	62.52	52.52	-13.46	-14.57
3	0.54063	0.10	42.34	29.96	42.44	30.06	56.00	46.00	-13.56	-15.94
4	1.26563	0.14	33.61	20.89	33.75	21.03	56.00	46.00	-22.25	-24.97
5	3.62500	0.25	31.31	20.81	31.56	21.06	56.00	46.00	-24.44	-24.94
6	14.14844	0.58	33.73	27.93	34.31	28.51	60.00	50.00	-25.69	-21.49

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

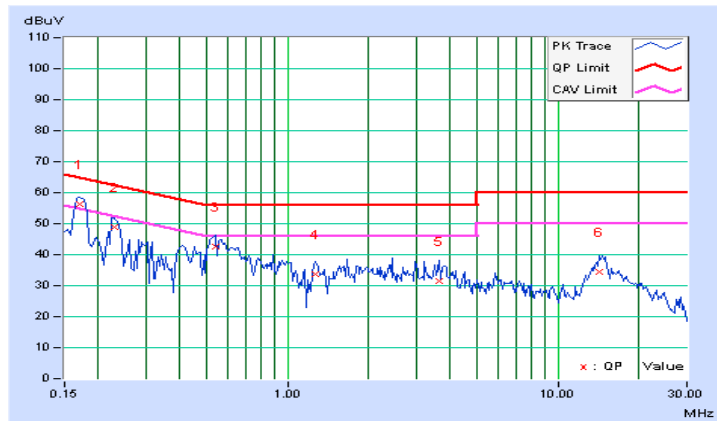


4.2.9 Test Results (Mode 3)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.15000	0.07	47.06	34.88	47.13	34.95	66.00	56.00	-18.87	-21.05
2	0.19297	0.07	41.00	28.13	41.07	28.20	63.91	53.91	-22.84	-25.71
3	0.24766	0.07	37.13	25.35	37.20	25.42	61.84	51.84	-24.63	-26.41
4	0.37656	0.09	26.36	14.27	26.45	14.36	58.35	48.35	-31.91	-34.00
5	0.58750	0.10	16.06	1.53	16.16	1.63	56.00	46.00	-39.84	-44.37
6	12.36328	0.51	21.07	16.65	21.58	17.16	60.00	50.00	-38.42	-32.84

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

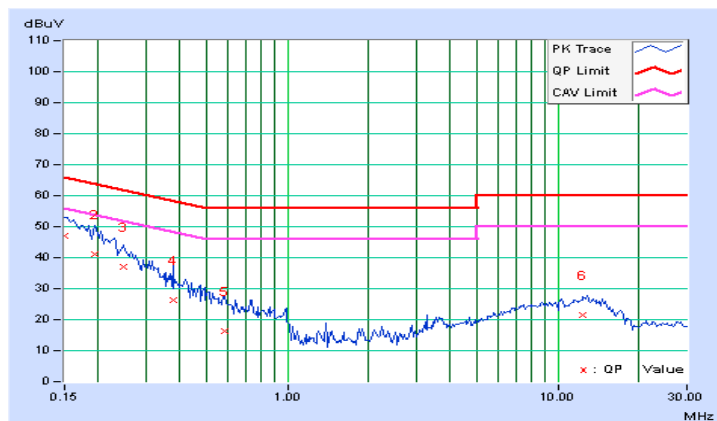


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.15781	0.06	46.83	34.15	46.89	34.21	65.58	55.58	-18.68	-21.36
2	0.20078	0.06	42.32	31.03	42.38	31.09	63.58	53.58	-21.20	-22.49
3	0.31016	0.08	38.81	33.31	38.89	33.39	59.97	49.97	-21.08	-16.58
4	0.50156	0.10	19.22	6.29	19.32	6.39	56.00	46.00	-36.68	-39.61
5	6.64063	0.35	16.75	12.10	17.10	12.45	60.00	50.00	-42.90	-37.55
6	12.09766	0.52	20.24	15.63	20.76	16.15	60.00	50.00	-39.24	-33.85

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

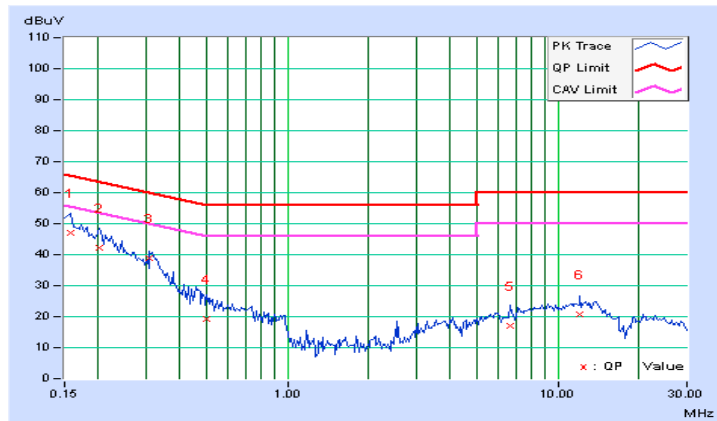


4.2.10 Test Results (Mode 4)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.16953	0.07	44.64	32.59	44.71	32.66	64.98	54.98	-20.28	-22.33
2	0.23594	0.07	37.89	22.29	37.96	22.36	62.24	52.24	-24.27	-29.87
3	0.42734	0.09	23.00	10.92	23.09	11.01	57.30	47.30	-34.21	-36.29
4	0.73594	0.11	22.24	12.25	22.35	12.36	56.00	46.00	-33.65	-33.64
5	6.14844	0.32	19.19	14.05	19.51	14.37	60.00	50.00	-40.49	-35.63
6	13.46484	0.54	21.57	17.33	22.11	17.87	60.00	50.00	-37.89	-32.13

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

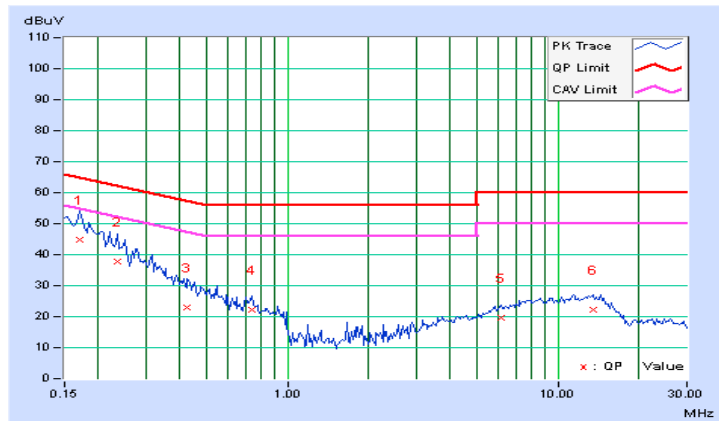


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.16562	0.06	45.27	31.30	45.33	31.36	65.18	55.18	-19.84	-23.81
2	0.20859	0.06	41.43	28.19	41.49	28.25	63.26	53.26	-21.77	-25.01
3	0.31016	0.08	39.44	34.22	39.52	34.30	59.97	49.97	-20.45	-15.67
4	0.73594	0.11	24.16	14.87	24.27	14.98	56.00	46.00	-31.73	-31.02
5	3.63672	0.25	16.64	11.43	16.89	11.68	56.00	46.00	-39.11	-34.32
6	11.33984	0.50	20.92	16.36	21.42	16.86	60.00	50.00	-38.58	-33.14

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

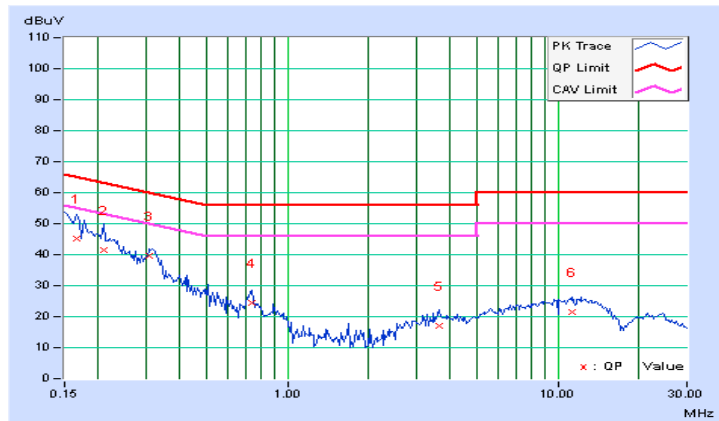


4.2.11 Test Results (Mode 5)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.15000	0.07	52.35	34.13	52.42	34.20	66.00	56.00	-13.58	-21.80
2	0.29063	0.08	37.07	26.29	37.15	26.37	60.51	50.51	-23.36	-24.14
3	0.46641	0.09	27.38	15.10	27.47	15.19	56.58	46.58	-29.10	-31.38
4	0.71250	0.11	22.14	12.51	22.25	12.62	56.00	46.00	-33.75	-33.38
5	4.66016	0.27	24.50	12.95	24.77	13.22	56.00	46.00	-31.23	-32.78
6	9.26172	0.43	26.28	15.61	26.71	16.04	60.00	50.00	-33.29	-33.96

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

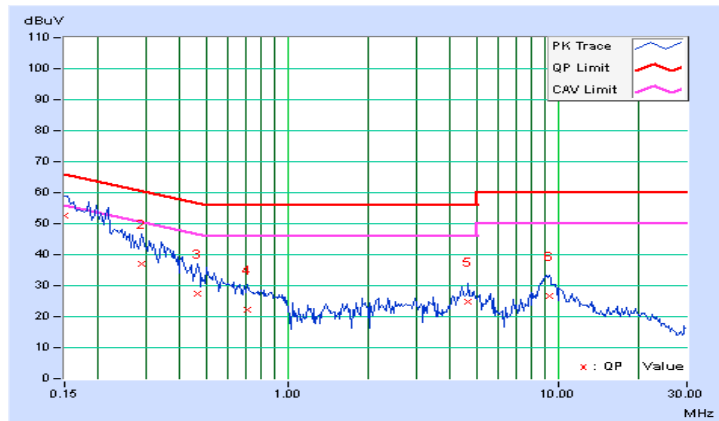


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	0.06	50.32	32.43	50.38	32.49	65.38	55.38	-14.99	-22.88
2	0.20078	0.06	47.21	30.97	47.27	31.03	63.58	53.58	-16.31	-22.55
3	0.32188	0.08	34.66	23.52	34.74	23.60	59.66	49.66	-24.92	-26.06
4	0.52891	0.10	21.81	8.98	21.91	9.08	56.00	46.00	-34.09	-36.92
5	4.73828	0.28	22.48	10.05	22.76	10.33	56.00	46.00	-33.24	-35.67
6	9.10156	0.43	26.06	15.21	26.49	15.64	60.00	50.00	-33.51	-34.36

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

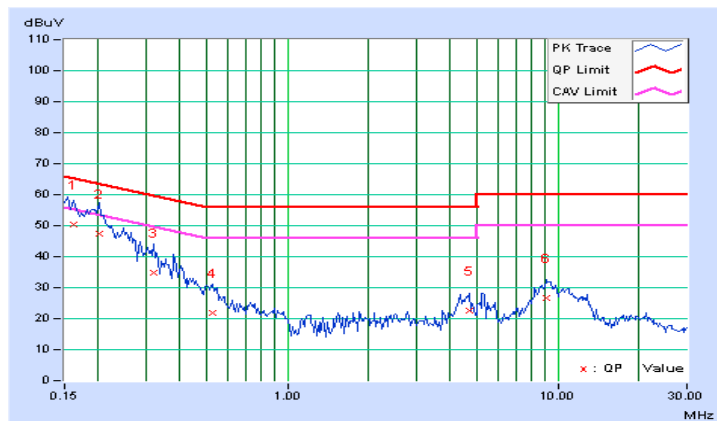


4.2.12 Test Results (Mode 6)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.15000	0.07	53.58	35.63	53.65	35.70	66.00	56.00	-12.35	-20.30
2	0.19297	0.07	49.55	32.52	49.62	32.59	63.91	53.91	-14.29	-21.32
3	0.27109	0.08	39.43	25.58	39.51	25.66	61.08	51.08	-21.58	-25.43
4	0.45078	0.09	28.81	16.07	28.90	16.16	56.86	46.86	-27.96	-30.70
5	4.79297	0.28	24.00	12.01	24.28	12.29	56.00	46.00	-31.72	-33.71
6	9.57813	0.44	26.29	15.32	26.73	15.76	60.00	50.00	-33.27	-34.24

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

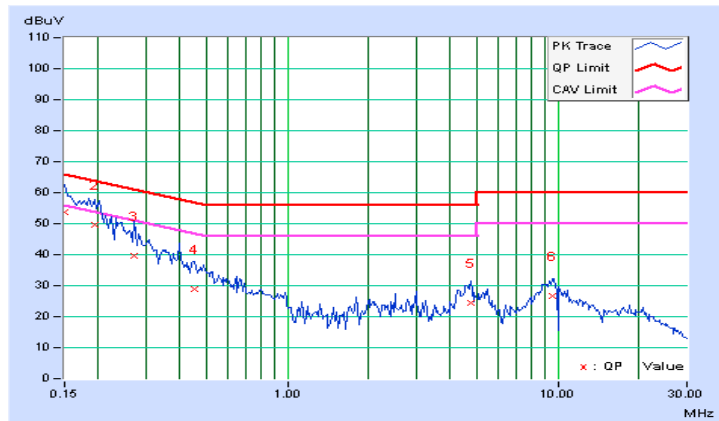


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17344	0.06	50.06	31.98	50.12	32.04	64.79	54.79	-14.67	-22.75
2	0.28672	0.07	37.54	24.18	37.61	24.25	60.62	50.62	-23.01	-26.37
3	0.60703	0.10	18.96	6.13	19.06	6.23	56.00	46.00	-36.94	-39.77
4	0.77500	0.11	15.83	6.24	15.94	6.35	56.00	46.00	-40.06	-39.65
5	4.85156	0.29	21.69	8.98	21.98	9.27	56.00	46.00	-34.02	-36.73
6	8.83203	0.42	25.37	14.11	25.79	14.53	60.00	50.00	-34.21	-35.47

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

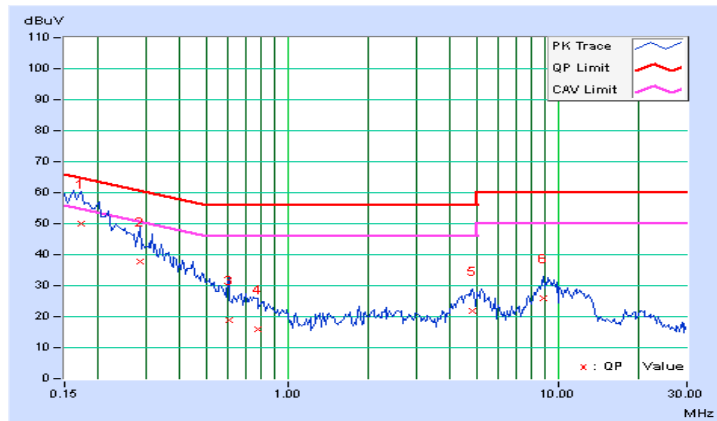

4.3 Transmit Power Measurement

4.3.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p \leq 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
	√	Indoor Access Point	1 Watt (30 dBm)
		Mobile and Portable client device	250mW (24 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;


Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.


For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.3.2 Test Setup

FOR POWER OUTPUT MEASUREMENT



FOR 26dB OCCUPIED BANDWIDTH



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedures

FOR POWER OUTPUT MEASUREMENT

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

FOR 26dB OCCUPIED BANDWIDTH

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Results

POWER OUTPUT:

802.11a

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
36	5180	20.46	20.94	235.338	23.72	30.00	PASS
40	5200	24.98	24.87	621.677	27.94	30.00	PASS
48	5240	26.48	26.85	928.803	29.68	30.00	PASS

Note: 5150~5250MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2] = 4.06\text{dBi} < 6\text{dBi}$, so the power limit shall not be reduced.

802.11ac (VHT20)

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
36	5180	20.41	20.82	230.682	23.63	30.00	PASS
40	5200	24.91	24.81	612.433	27.87	30.00	PASS
48	5240	26.42	26.78	914.962	29.61	30.00	PASS

Note: 5150~5250MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2] = 4.06\text{dBi} < 6\text{dBi}$, so the power limit shall not be reduced.

802.11ac (VHT40)

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
38	5190	17.34	17.76	113.904	20.57	30.00	PASS
46	5230	23.37	23.31	431.559	26.35	30.00	PASS

Note: 5150~5250MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2] = 4.06\text{dBi} < 6\text{dBi}$, so the power limit shall not be reduced.

802.11ac (VHT80)

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
42	5210	15.92	16.10	79.822	19.02	30.00	PASS


Note: 5150~5250MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2] = 4.06\text{dBi} < 6\text{dBi}$, so the power limit shall not be reduced.

4.4 Peak Power Spectral Density Measurement

4.4.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
	√	Indoor Access Point	
		Mobile and Portable client device	11dBm/ MHz

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

Using method SA-1

- a. Set span to encompass the entire emission bandwidth (EBW) of the signal.
- b. Set RBW = 1 MHz, Set VBW ≥ 3 MHz, Detector = RMS
- c. Sweep time = auto, trigger set to “free run”.
- d. Trace average at least 100 traces in power averaging mode.
- e. Record the max value

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

802.11a

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)		TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1			
36	5180	5.57	5.40	8.50	17	PASS
40	5200	9.50	10.07	12.80	17	PASS
48	5240	10.41	10.73	13.58	17	PASS

NOTE:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2] = 4.06\text{dBi} < 6\text{dBi}$, so the power density limit shall not be reduced.

802.11ac (VHT20)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)		TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1			
36	5180	4.90	5.50	8.22	17	PASS
40	5200	9.54	9.78	12.67	17	PASS
48	5240	9.61	10.17	12.91	17	PASS

NOTE:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2] = 4.06\text{dBi} < 6\text{dBi}$, so the power density limit shall not be reduced.

802.11ac (VHT40)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)		TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1			
38	5190	-1.09	-0.41	2.27	17	PASS
46	5230	4.93	4.94	7.95	17	PASS

NOTE:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2] = 4.06\text{dBi} < 6\text{dBi}$, so the power density limit shall not be reduced.

802.11ac (VHT80)


CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)		TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1			
42	5210	-4.99	-5.09	-2.03	17	PASS

NOTE:


1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2] = 4.06\text{dBi} < 6\text{dBi}$, so the power density limit shall not be reduced.

SPECTRUM PLOT OF WORST VALUE


802.11a / Chain 1 : CH 48

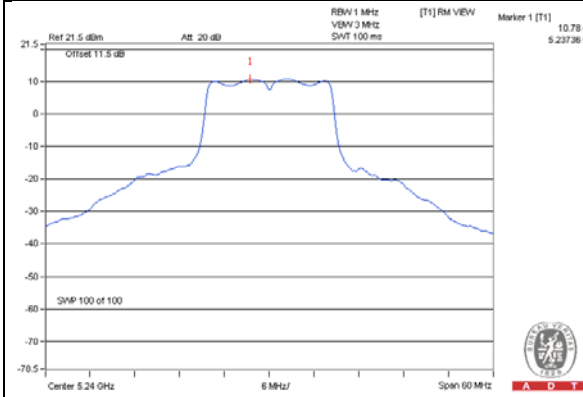


802.11ac (VHT20) / Chain 1 : CH 48

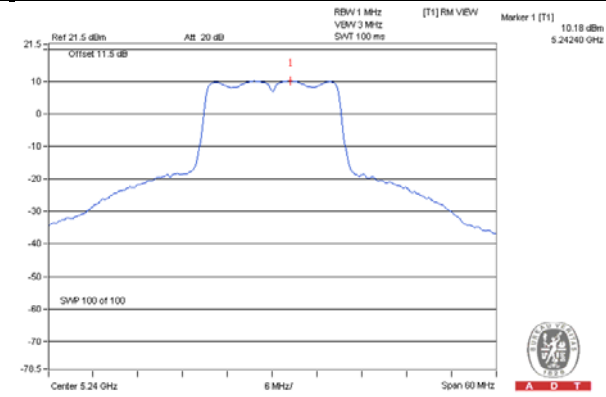

802.11ac (VHT40) / Chain 1 : CH 46

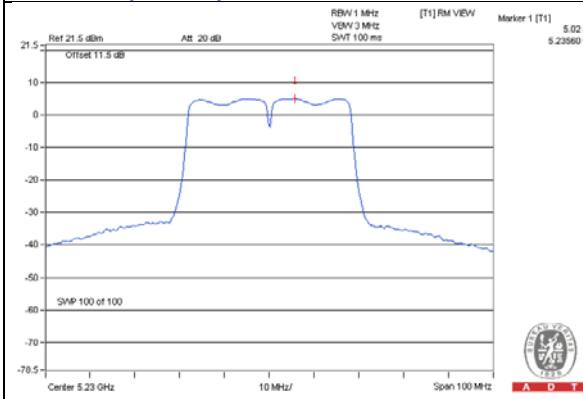

802.11ac (VHT80) / Chain 0 : CH 42

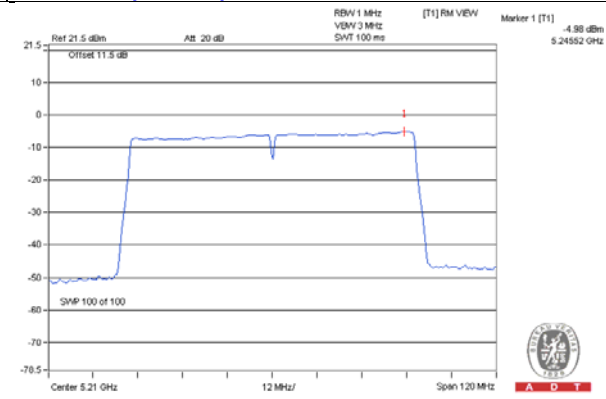


4.5 Frequency Stability Measurement

4.5.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.5.2 Test Setup

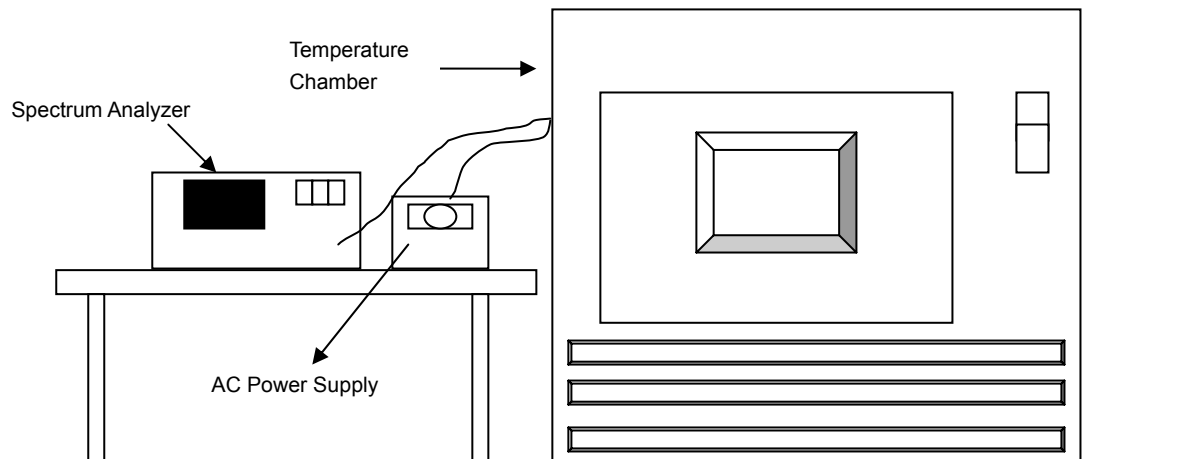

4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedures

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Conditions

Set the EUT transmit at un-modulation mode to test frequency stability.

4.5.7 Test Results

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5240MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
50	120	5239.9876	-0.00024	5239.9859	-0.00027	5239.9864	-0.00026	5239.987	-0.00025
40	120	5239.9857	-0.00027	5239.9821	-0.00034	5239.9855	-0.00028	5239.9822	-0.00034
30	120	5239.9983	-0.00003	5240	0.00000	5239.9977	-0.00004	5239.9975	-0.00005
20	120	5239.9787	-0.00041	5239.9814	-0.00035	5239.9822	-0.00034	5239.9815	-0.00035
10	120	5240.0055	0.00010	5240.0042	0.00008	5240.0064	0.00012	5240.0037	0.00007
0	120	5239.9931	-0.00013	5239.99	-0.00019	5239.9939	-0.00012	5239.9931	-0.00013
-10	120	5240.0261	0.00050	5240.0222	0.00042	5240.0231	0.00044	5240.0222	0.00042
-20	120	5240.0234	0.00045	5240.0265	0.00051	5240.0245	0.00047	5240.0271	0.00052
-30	120	5240.0247	0.00047	5240.0235	0.00045	5240.025	0.00048	5240.0249	0.00048

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5240MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
20	138	5239.9794	-0.00039	5239.9813	-0.00036	5239.9832	-0.00032	5239.9814	-0.00035
	120	5239.9787	-0.00041	5239.9814	-0.00035	5239.9822	-0.00034	5239.9815	-0.00035
	102	5239.9777	-0.00043	5239.9824	-0.00034	5239.9827	-0.00033	5239.9821	-0.00034

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).



Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab/Telecom Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---