



FCC TEST REPORT

REPORT NO.: RF980313H10
MODEL NO.: WRT120N
RECEIVED: March 13, 2009
TESTED: March 19 to April 15, 2009
ISSUED: April 20, 2009

APPLICANT: Cisco-Linksys, LLC

ADDRESS: 121 Theory Drive, Irvine, CA 92617, USA

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

TEST LOCATION: No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung
Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien
307, Taiwan

This test report consists of 88 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





Table of Contents

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY.....	6
3.	GENERAL INFORMATION.....	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES	9
3.2.1	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	10
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	12
3.4	DESCRIPTION OF SUPPORT UNITS.....	13
3.5	CONFIGURATION OF SYSTEM UNDER TEST	14
4.	TEST TYPES AND RESULTS	15
4.1	CONDUCTED EMISSION MEASUREMENT.....	15
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	15
4.1.2	TEST INSTRUMENTS	15
4.1.3	TEST PROCEDURES.....	16
4.1.4	DEVIATION FROM TEST STANDARD	16
4.1.5	TEST SETUP	17
4.1.6	EUT OPERATING CONDITIONS	17
4.1.7	TEST RESULTS	18
4.2	RADIATED EMISSION MEASUREMENT	20
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	20
4.2.2	TEST INSTRUMENTS	21
4.2.3	TEST PROCEDURES.....	22
4.2.4	DEVIATION FROM TEST STANDARD	22
4.2.5	TEST SETUP	23
4.2.6	EUT OPERATING CONDITIONS	23
	Below 1GHz Test Data	24
4.2.7	TEST RESULTS	24
	Above 1GHz Test Data.....	25
4.2.8	TEST RESULTS	25
4.3	6dB BANDWIDTH MEASUREMENT	53
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT.....	53
4.3.2	TEST INSTRUMENTS	53
4.3.3	TEST PROCEDURE.....	54
4.3.4	DEVIATION FROM TEST STANDARD	54
4.3.5	TEST SETUP	54
4.3.6	EUT OPERATING CONDITIONS	54
4.3.7	TEST RESULTS	55



A D T

4.4	MAXIMUM PEAK OUTPUT POWER.....	63
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	63
4.4.2	INSTRUMENTS.....	63
4.4.3	TEST PROCEDURES.....	63
4.4.4	DEVIATION FROM TEST STANDARD	63
4.4.5	TEST SETUP	63
4.4.6	EUT OPERATING CONDITIONS	63
4.4.7	TEST RESULTS	64
4.5	POWER SPECTRAL DENSITY MEASUREMENT.....	66
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	66
4.5.2	TEST INSTRUMENTS	66
4.5.3	TEST PROCEDURE.....	67
4.5.4	DEVIATION FROM TEST STANDARD	67
4.5.5	TEST SETUP	67
4.5.6	EUT OPERATING CONDITION.....	67
4.5.7	TEST RESULTS	68
4.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT	76
4.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	76
4.6.2	TEST INSTRUMENTS	76
4.6.3	TEST PROCEDURE.....	76
4.6.4	DEVIATION FROM TEST STANDARD	77
4.6.5	EUT OPERATING CONDITION.....	77
4.6.6	TEST RESULTS	77
4.7	ANTENNA REQUIREMENT	86
4.7.1	STANDARD APPLICABLE	86
4.7.2	ANTENNA CONNECTED CONSTRUCTION	86
5.	INFORMATION ON THE TESTING LABORATORIES	87
6.	APPENDIX-A- MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	88



1. CERTIFICATION

PRODUCT: Wireless-N Home Router
BRAND NAME: Linksys
MODEL NO.: WRT120N
TEST SAMPLE: R&D SAMPLE
TESTED: March 19 to April 15, 2009
APPLICANT: Cisco-Linksys, LLC
STANDARDS: FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment (Model: WRT120N) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Carol Liao , **DATE:** April 20, 2009
(Carol Liao, Specialist)

TECHNICAL ACCEPTANCE : Hank Chung , **DATE:** April 20, 2009
Responsible for RF (Hank Chung, Deputy Manager)

APPROVED BY : May Chen , **DATE:** April 20, 2009
(May Chen, Deputy Manager)



A D T

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C (Section 15.247)			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -8.77dB at 0.150MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -0.50dB at 2390.00MHz
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Conducted Out-Band Emission Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.45 dB
Radiated emissions (30MHz-1GHz)	3.94 dB
Radiated emissions (1GHz -18GHz)	2.49 dB
Radiated emissions (18GHz -40GHz)	2.70 dB



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless-N Home Router
MODEL NO.	WRT120N
FCC ID	Q87-WRT120N
POWER SUPPLY	DC 12V from switching adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/ 5.5/ 2/ 1Mbps 802.11g: 54/ 48/ 36/ 24/ 18/ 12/ 9/ 6Mbps Draft 802.11n (20MHz): 65/58.5/52/39/26/19.5/13/6.5Mbps Draft 802.11n (40MHz): 135/121.5/108/81/54/40.5/27/13.5Mbps
FREQUENCY RANGE	802.11b & 802.11g: 2412 ~ 2462MHz
NUMBER OF CHANNEL	11 for 802.11b, 802.11g, draft 802.11n (20MHz) 7 for draft 802.11n (40MHz)
MAXIMUM OUTPUT POWER	802.11b: 197.697mW 802.11g: 479.733mW draft 802.11n (20MHz): 411.150mW draft 802.11n (40MHz): 309.742mW
ANTENNA TYPE	Please see note 6 (on next page)
DATA CABLE	NA
I/O PORT	WAN Port x 1, Ethernet Port x 4

NOTE:

1. The EUT incorporates a SISO function with 802.11b, 802.11g, draft 802.11n. Physically, the EUT provides one completed transmitter and receivers.
2. The EUT is 1 * 1 spatial SISO without beam forming function. The antenna configuration is one transmitter antenna and one receiver antenna, as there is 1 PIFA antenna. Spatial multiplexing modes for simultaneous transmission using 1 antenna, and for simultaneous receiver using 1 antenna. The 11b/g/n legacy mode is limited to single transmitter only.
3. When the EUT operating in draft 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 7.

4. The EUT complies with draft 802.11n standards and backwards compatible with 802.11b, 802.11g products.
5. The EUT operates in the 2.4GHz frequency spectrum with data rate up to 135Mbps.
6. There are two antennas provided to this EUT, please refer to the following table:

No.	Antenna Type	Gain (dBi)	Antenna Connector
1	PIFA	2	NA
2	PIFA	2	NA

7. The EUT was pre-tested in chamber under the following modes:

Test Mode	Description
Mode A	Level-set
Mode B	Tower-set

From the above modes, the worse radiated emission was found in **Mode B**. Therefore only the test data of the mode was recorded in this report individually.

8. The EUT must be supplied with a switching adapter and the following different models could be chosen:

Adapter 1	
Brand:	Bestec
Model No.:	EA0121WAA
Input power :	AC100-240V, 50-60Hz, 0.5A
Output power :	DC 12V, 1A DC output cable (Unshielded, 1.6m)
Adapter 2	
Brand:	Leader
Model No.:	MU12-G120100-A1
Input power :	AC100-240V, 50-60Hz, 0.5A
Output power :	DC 12V, 1A DC output cable (Unshielded, 1.6m)

The EUT was pre-tested with the above adapters, the worst case was found in **adapter 2**. Therefore only the test data of the adapter was recorded in this report individually.

9. The EUT, operates in the 2.4GHz frequency range, lets you connect IEEE 802.11g or IEEE 802.11b and draft 802.11n technique devices to the network.
10. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided for 802.11b, 802.11g, draft 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Seven channels are provided for draft 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2422MHz	5	2442MHz
2	2427MHz	6	2447MHz
3	2432MHz	7	2452MHz
4	2437MHz		



A D T

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	
-	√	√	√	√	-

Where PLC: Power Line Conducted Emission

RE < 1G: Radiated Emission below 1GHz

RE ≥ 1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1	DSSS	DBPSK	1

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1	DSSS	DBPSK	1



A D T

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 11	OFDM	BPSK	6
Draft 802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	6.5
Draft 802.11n (40MHz)	1 to 7	1, 7	OFDM	BPSK	13.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Wireless-N Home Router. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



A D T

3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP17L	CN-ONF743-48643-7AV-0124	FCC DoC
2	NOTEBOOK COMPUTER	HP	HSTNN-S19C	WFY93-WQ98K-BH87F-KD366-RB773	FCC DoC
3	HUB	ZyXEL	ES-116P	S060H02000215	FCC Doc

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	UTP Cable, 10m
2	UTP Cable, 10m
3	UTP Cable, 10m

NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

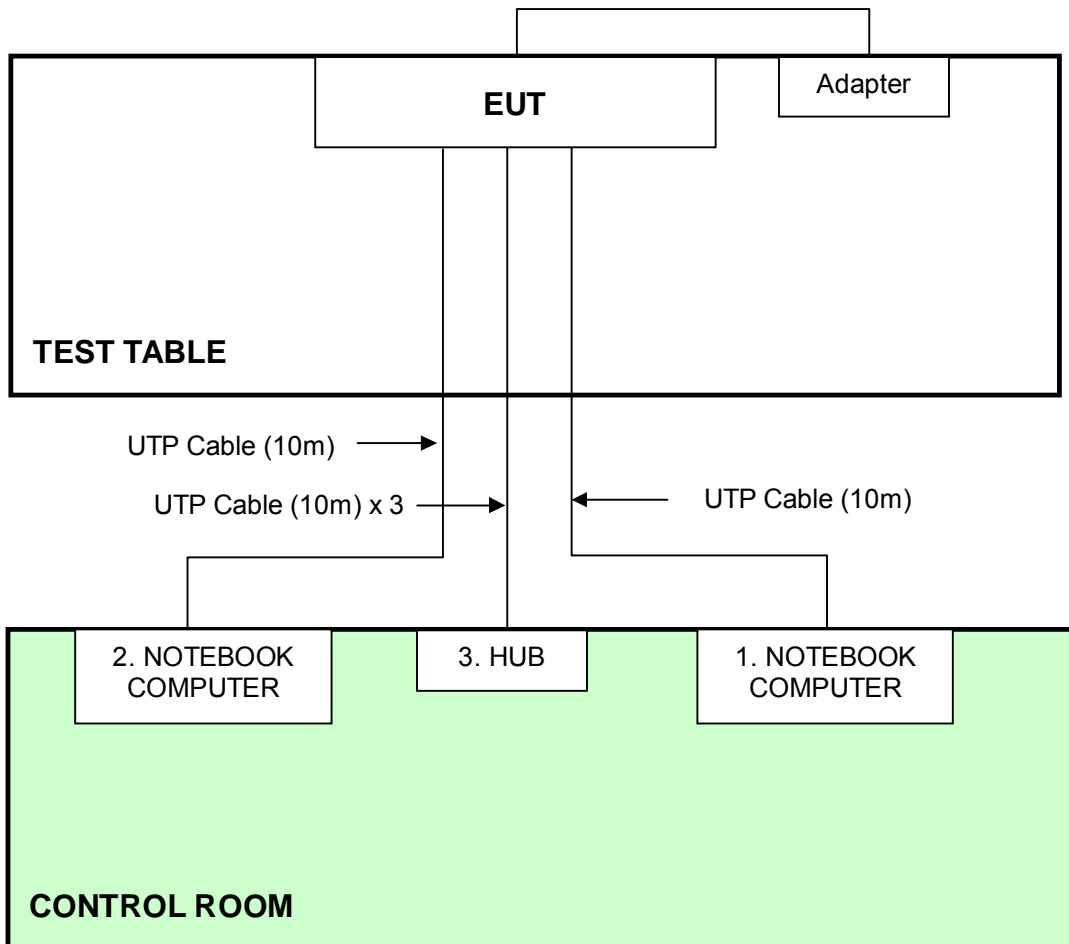



A D T

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	100287	Mar. 05, 2009	Mar. 04, 2010
Line-Impedance Stabilization Network (for EUT)	KNW-407	8-1395-12	May 07, 2008	May 06, 2009
Line-Impedance Stabilization Network (for Peripheral)	ENV-216	100072	June 13, 2008	June 12, 2009
RF Cable (JYBAO)	5DFB	COACAB-001	Dec 15, 2008	Dec 14, 2009
50 ohms Terminator	50	3	Nov. 05, 2008	Nov. 04, 2009
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in Shielded Room No. A.
 3. The VCCI Con A Registration No. is C-817.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

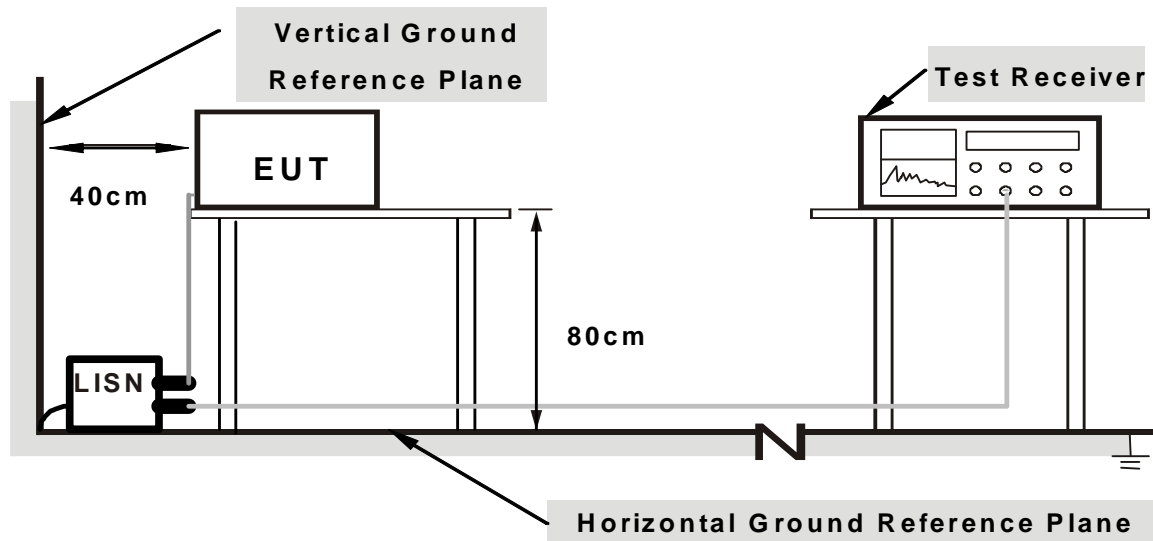

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

1. Placed the EUT on testing table.
2. Prepared other computer systems (support units 1 ~ 3) to act as communication partners and placed them outside of testing area.
3. The communication partner run test program “ART R8 B33” to enable EUT under specific wireless channel transmitting condition. Both support units 1 & 2 are communicated with each other via wired transmission.


4.1.7 TEST RESULTS

802.11b DSSS MODULATION:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line (L)
MODULATION TYPE	DBPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	1Mbps	INPUT POWER	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 965hPa	TESTED BY	Eagle Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.150	0.62	56.61	44.67	57.23	45.29	66.00	56.00	-8.77
2	0.400	0.41	42.71	-	43.12	-	57.85	47.85	-14.73	-
3	0.959	0.39	36.81	-	37.20	-	56.00	46.00	-18.80	-
4	2.102	0.40	33.12	-	33.52	-	56.00	46.00	-22.48	-
5	8.329	0.51	36.71	-	37.22	-	60.00	50.00	-22.78	-
6	18.137	0.70	34.27	-	34.97	-	60.00	50.00	-25.03	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

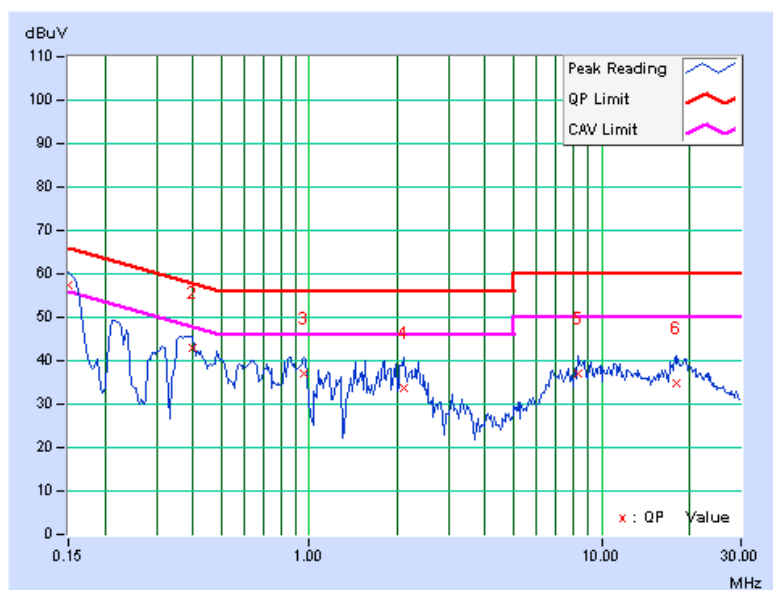




A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Neutral (N)
MODULATION TYPE	DBPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	1Mbps	INPUT POWER	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 965hPa	TESTED BY	Eagle Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.160	0.34	53.33	-	53.67	-	65.48	55.48	-11.80
2	0.388	0.18	43.67	-	43.85	-	58.10	48.10	-14.25	-
3	0.959	0.15	37.23	-	37.38	-	56.00	46.00	-18.62	-
4	2.387	0.19	35.86	-	36.05	-	56.00	46.00	-19.95	-
5	8.453	0.30	37.57	-	37.87	-	60.00	50.00	-22.13	-
6	19.301	0.56	35.14	-	35.70	-	60.00	50.00	-24.30	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

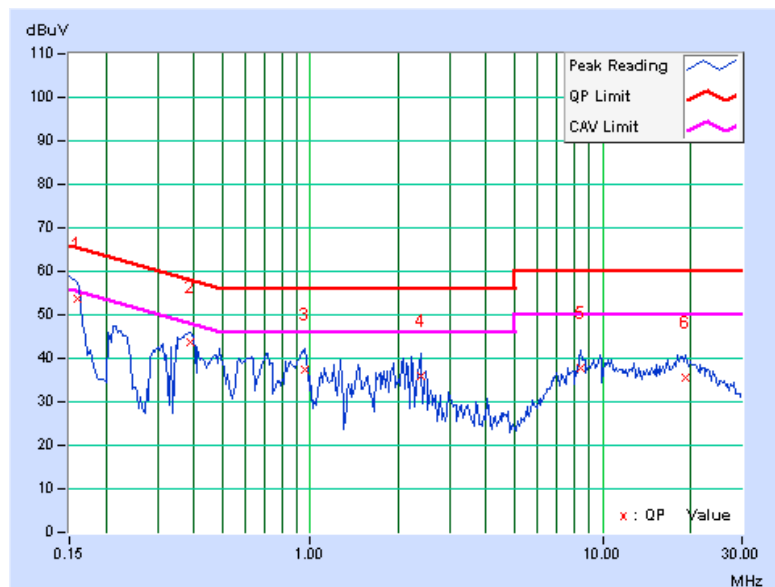

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100036	Dec. 9, 2008	Dec. 8, 2009
HP Pre_Amplifier	8449B	3008A01923	Nov. 10, 2008	Nov. 9, 2009
ROHDE & SCHWARZ Test Receiver	ESCS30	847124/029	Sep. 9, 2008	Sep. 8, 2009
SCHWARZBECK TRILOG Broadband Antenna	VULB 9168	138	April 30, 2008	April 29, 2009
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 09, 2008	Dec. 08, 2009
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 22, 2009	Jan. 21, 2010
RF Switches	EMH-011	08009	Oct. 07, 2008	Oct. 06, 2009
RF CABLE (Chaintek)	Sucoflex 106	28077	Aug. 15, 2008	Aug. 14, 2009
RF Cable	8DFB	STCCAB-30M-1GHz	Oct. 07, 2008	Oct. 06, 2009
Software	ADT_Radiated_V7.6.15.9.2	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, HP preamplifier (model: 8449B) and Spectrum Analyzer (model: FSP40) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 7450G-3.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

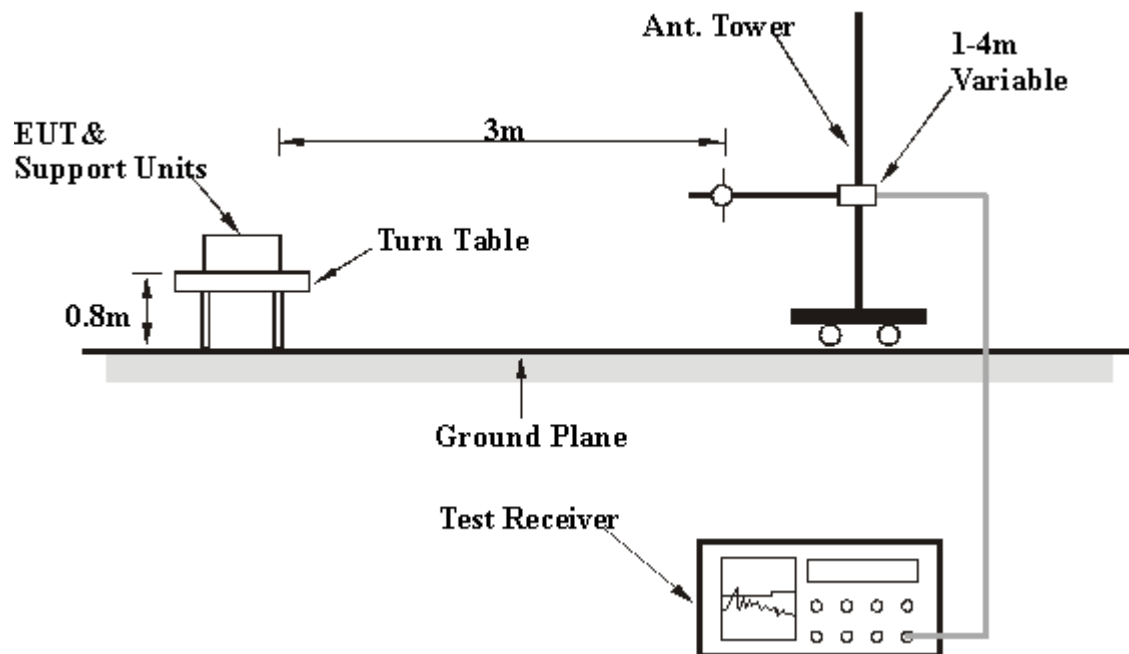

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as the 4.1.6



A D T

Below 1GHz Test Data**4.2.7 TEST RESULTS****BELOW 1GHz WORST-CASE DATA : 802.11b DSSS MODULATION**

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	19deg. C, 73%RH 965hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	45.23	23.24 QP	40.00	-16.76	1.54 H	245	9.53	13.71
2	125.00	33.62 QP	43.50	-9.88	1.75 H	24	19.50	14.12
3	250.00	38.20 QP	46.00	-7.80	1.65 H	249	22.78	15.42
4	350.02	35.64 QP	46.00	-10.36	1.47 H	225	16.57	19.07
5	375.00	39.90 QP	46.00	-6.10	1.48 H	121	19.80	20.10
6	480.00	30.00 QP	46.00	-16.00	1.11 H	210	7.65	22.35
7	500.00	39.13 QP	46.00	-6.87	1.65 H	258	16.47	22.66
8	660.00	28.21 QP	46.00	-17.79	1.70 H	8	2.07	26.14
9	700.00	38.50 QP	46.00	-7.50	1.02 H	223	11.46	27.04
10	750.00	38.46 QP	46.00	-7.54	1.02 H	236	10.00	28.46

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	74.23	28.24 QP	40.00	-11.76	1.25 V	241	15.74	12.50
2	125.00	37.24 QP	43.50	-6.26	1.02 V	33	23.12	14.12
3	200.01	30.78 QP	43.50	-12.72	1.66 V	250	17.80	12.98
4	250.01	35.36 QP	46.00	-10.64	1.50 V	65	19.94	15.42
5	375.00	42.65 QP	46.00	-3.35	1.45 V	236	22.55	20.10
6	500.00	37.91 QP	46.00	-8.09	1.45 V	213	15.25	22.66
7	564.00	38.26 QP	46.00	-7.74	1.47 V	74	14.15	24.11
8	625.00	33.36 QP	46.00	-12.64	1.66 V	201	8.02	25.34
9	750.00	34.69 QP	46.00	-11.31	1.02 V	98	6.23	28.46
10	875.01	35.65 QP	46.00	-10.35	1.70 V	45	4.93	30.72

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



A D T

Above 1GHz Test Data

4.2.8 TEST RESULTS

802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 66%RH 965hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.78 PK	74.00	-11.22	1.67 H	235	32.72	30.06
2	2390.00	50.33 AV	54.00	-3.67	1.67 H	235	20.27	30.06
3	*2412.00	111.45 PK			1.56 H	284	81.30	30.15
4	*2412.00	107.49 AV			1.56 H	284	77.34	30.15
5	4824.00	57.01 PK	74.00	-16.99	1.44 H	26	21.55	35.46
6	4824.00	53.07 AV	54.00	-0.93	1.44 H	26	17.61	35.46
7	#7236.00	57.34 PK	91.45	-34.11	1.28 H	64	15.49	41.85
8	#7236.00	48.27 AV	87.49	-39.22	1.28 H	64	6.42	41.85

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.71 PK	74.00	-18.29	1.00 V	170	25.65	30.06
2	2390.00	44.26 AV	54.00	-9.74	1.00 V	170	14.20	30.06
3	*2412.00	101.09 PK			1.69 V	300	70.94	30.15
4	*2412.00	97.60 AV			1.69 V	300	67.45	30.15
5	4824.00	47.58 PK	74.00	-26.42	1.39 V	150	12.12	35.46
6	4824.00	41.09 AV	54.00	-12.91	1.39 V	150	5.63	35.46

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 66%RH 965hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.73 PK	74.00	-12.27	1.83 H	303	31.67	30.06
2	2390.00	50.26 AV	54.00	-3.74	1.83 H	303	20.20	30.06
3	*2437.00	110.31 PK			1.84 H	293	80.07	30.24
4	*2437.00	106.59 AV			1.84 H	293	76.35	30.24
5	2500.00	61.47 PK	74.00	-12.53	1.60 H	288	30.98	30.49
6	2500.00	50.09 AV	54.00	-3.91	1.60 H	288	19.60	30.49
7	4874.00	55.16 PK	74.00	-18.84	1.45 H	51	19.61	35.55
8	4874.00	52.42 AV	54.00	-1.58	1.45 H	51	16.87	35.55
9	7311.00	57.58 PK	74.00	-16.42	1.35 H	63	15.54	42.04
10	7311.00	47.78 AV	54.00	-6.22	1.35 H	63	5.74	42.04
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.09 PK	74.00	-17.91	1.79 V	300	26.03	30.06
2	2390.00	45.19 AV	54.00	-8.81	1.79 V	300	15.13	30.06
3	*2437.00	101.71 PK			1.71 V	305	71.47	30.24
4	*2437.00	97.73 AV			1.71 V	305	67.49	30.24
5	2500.00	55.07 PK	74.00	-18.93	1.50 V	299	24.58	30.49
6	2500.00	43.05 AV	54.00	-10.95	1.50 V	299	12.56	30.49
7	4874.00	48.99 PK	74.00	-25.01	1.33 V	148	13.44	35.55
8	4874.00	42.50 AV	54.00	-11.50	1.33 V	148	6.95	35.55
9	7311.00	59.92 PK	74.00	-14.08	1.68 V	175	17.88	42.04
10	7311.00	50.06 AV	54.00	-3.94	1.68 V	175	8.02	42.04

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 66%RH 965hPa	TESTED BY	Eric Lee



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.53 PK			1.58 H	294	80.19	30.34
2	*2462.00	106.61 AV			1.58 H	294	76.27	30.34
3	2489.70	63.34 PK	74.00	-10.66	1.63 H	303	32.89	30.45
4	2489.70	50.30 AV	54.00	-3.70	1.63 H	303	19.85	30.45
5	4924.00	50.25 PK	74.00	-23.75	1.60 H	325	14.62	35.63
6	4924.00	42.98 AV	54.00	-11.02	1.60 H	325	7.35	35.63
7	7386.00	56.44 PK	74.00	-17.56	1.68 H	215	14.21	42.23
8	7386.00	47.98 AV	54.00	-6.02	1.68 H	215	5.75	42.23
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.50 PK			1.68 V	304	71.16	30.34
2	*2462.00	97.60 AV			1.68 V	304	67.26	30.34
3	2483.50	58.21 PK	74.00	-15.79	1.24 V	334	27.78	30.43
4	2483.50	45.95 AV	54.00	-8.05	1.24 V	334	15.52	30.43
5	4924.00	48.11 PK	74.00	-25.89	1.39 V	147	12.48	35.63
6	4924.00	42.29 AV	54.00	-11.71	1.39 V	147	6.66	35.63
7	7386.00	59.82 PK	74.00	-14.18	1.70 V	176	17.59	42.23
8	7386.00	49.02 AV	54.00	-4.98	1.70 V	176	6.79	42.23

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T



RESTRICTED BANDEDGE (802.11b MODE,CH1, HORIZONTAL)

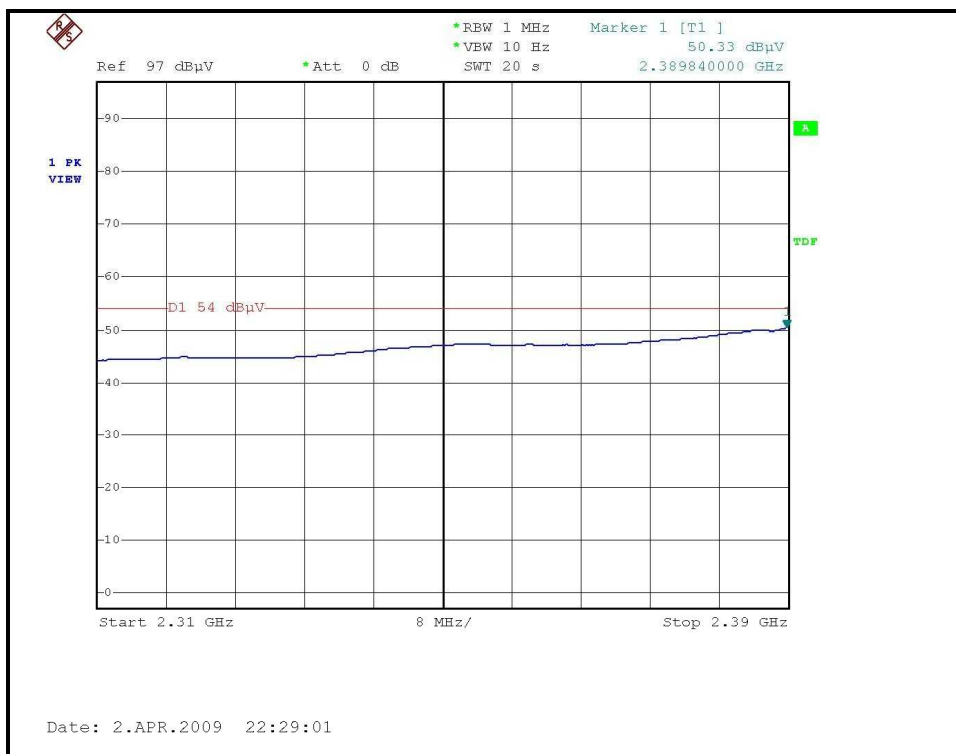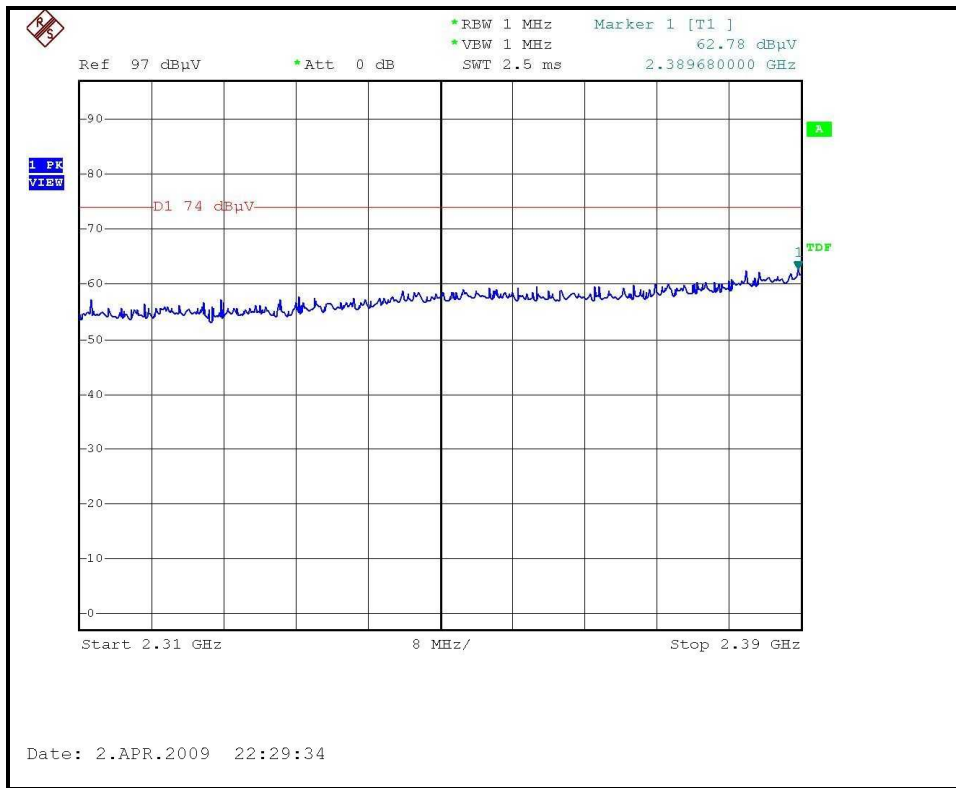



A D T



RESTRICTED BANDEDGE (802.11b MODE, CH1, VERTICAL)

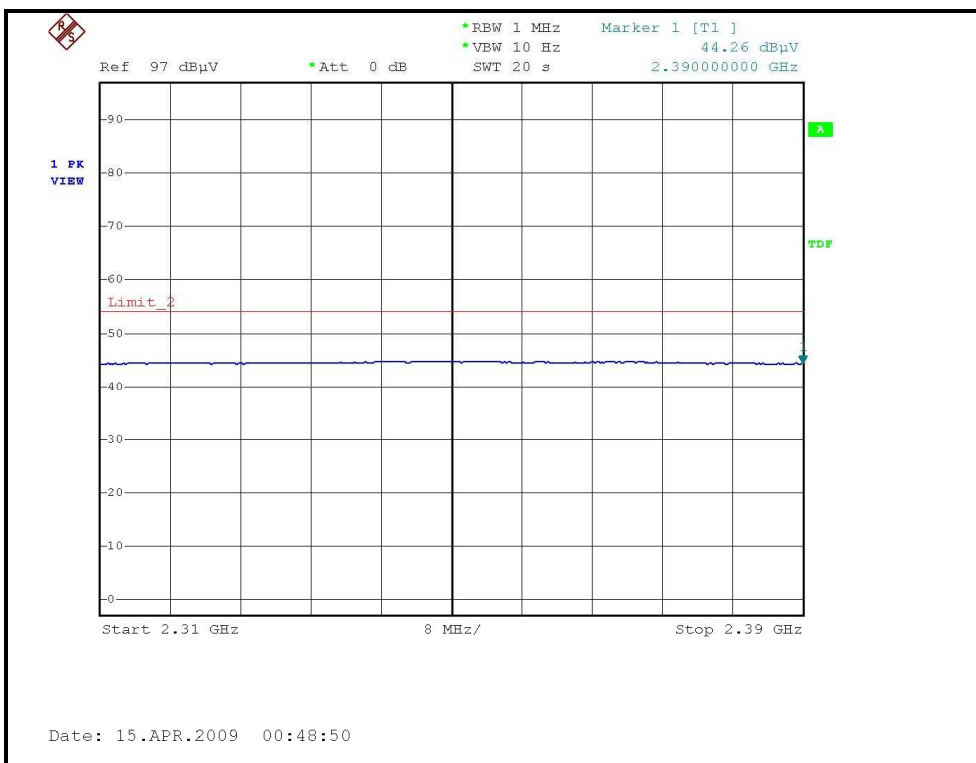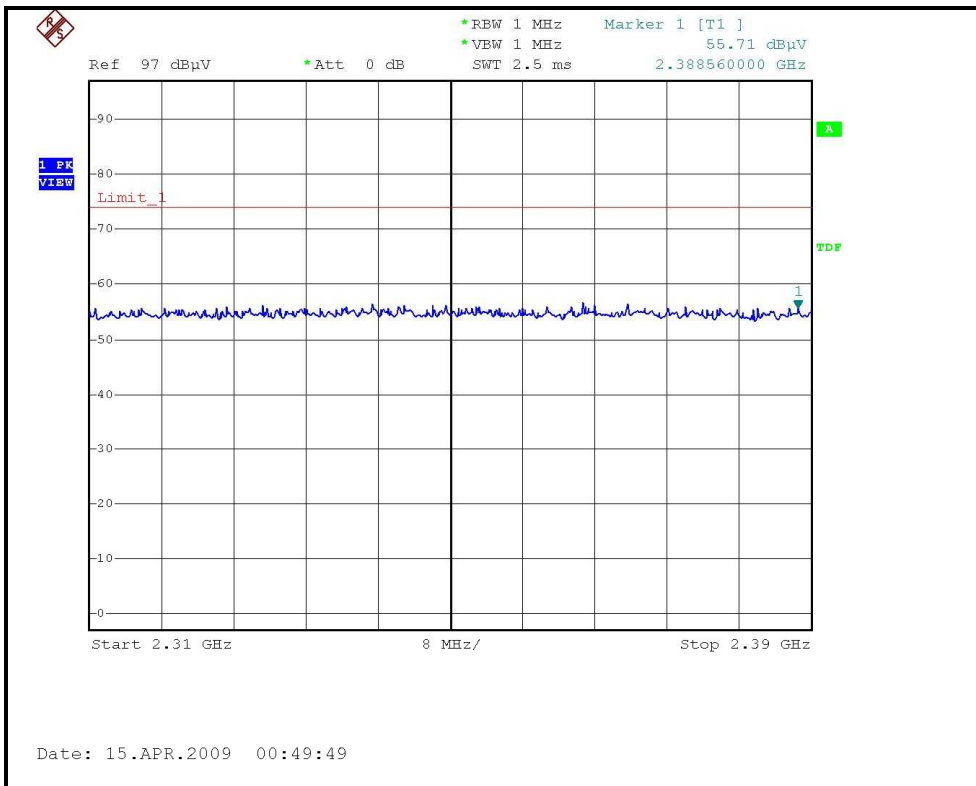



A D T



RESTRICTED BANDEDGE (802.11b MODE,CH11, HORIZONTAL)

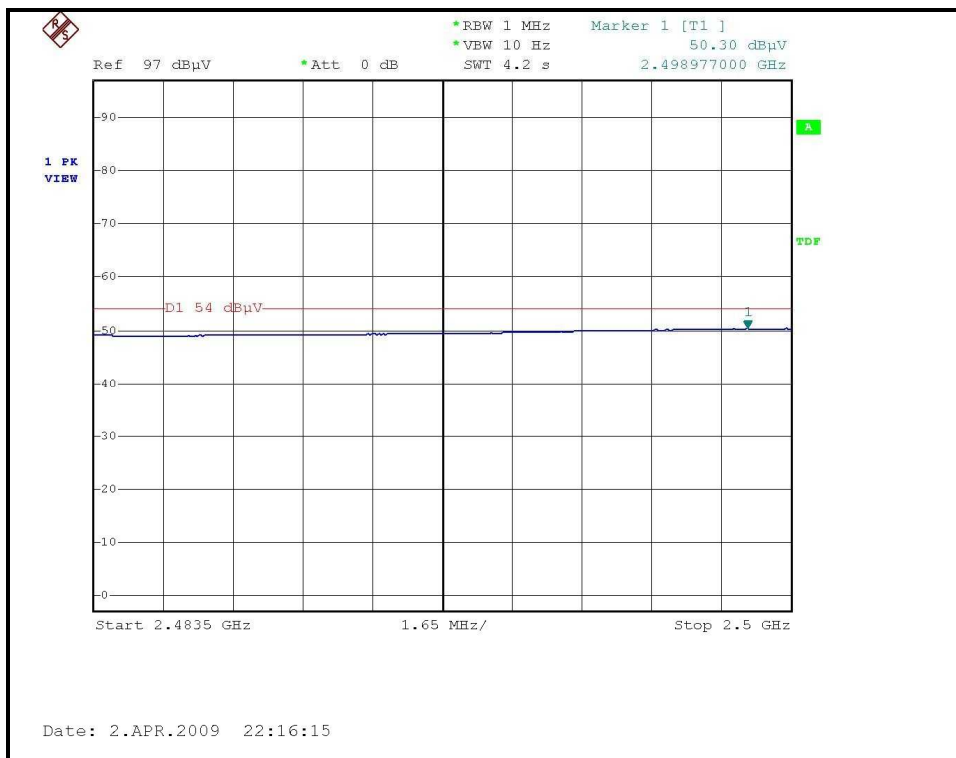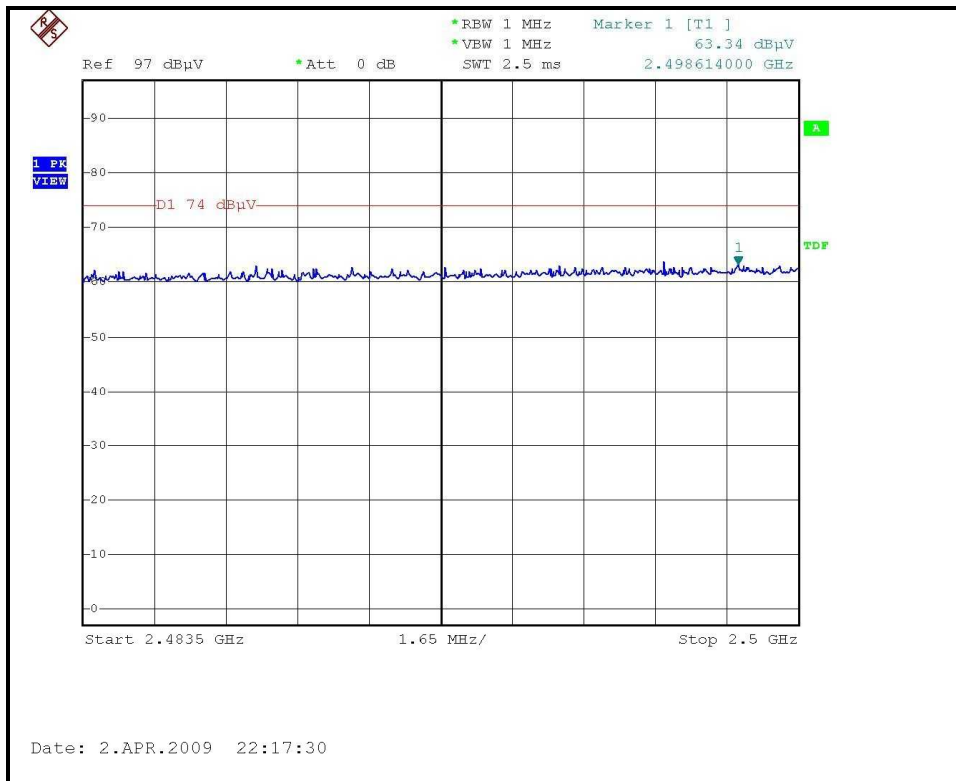



A D T

RESTRICTED BANDEDGE (802.11b MODE,CH11, VERTICAL)

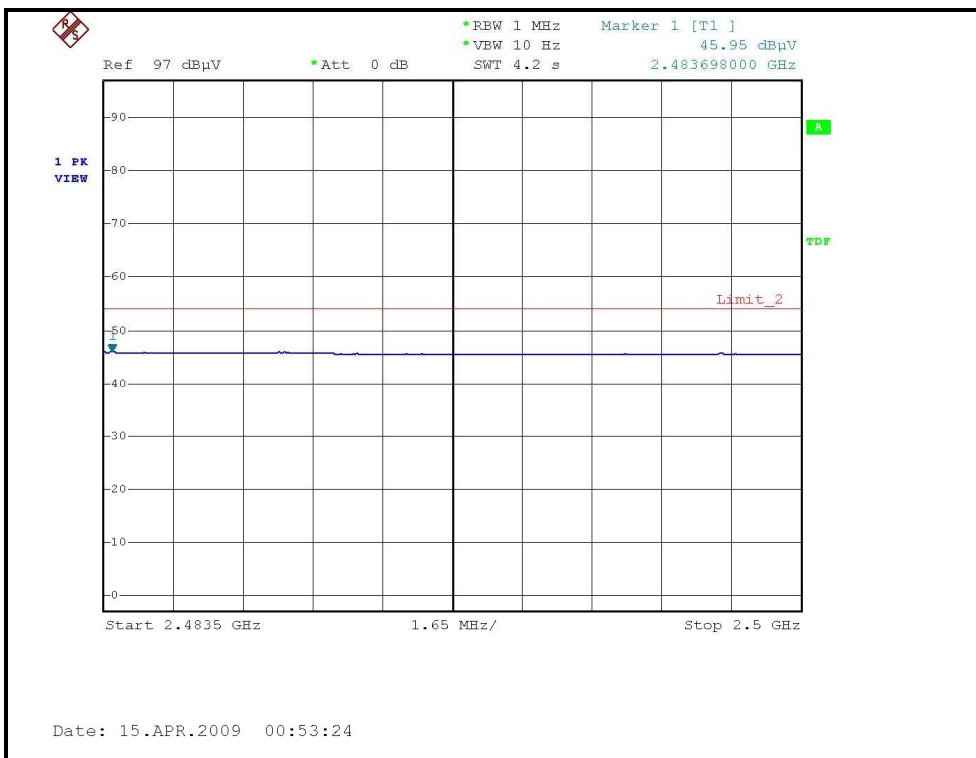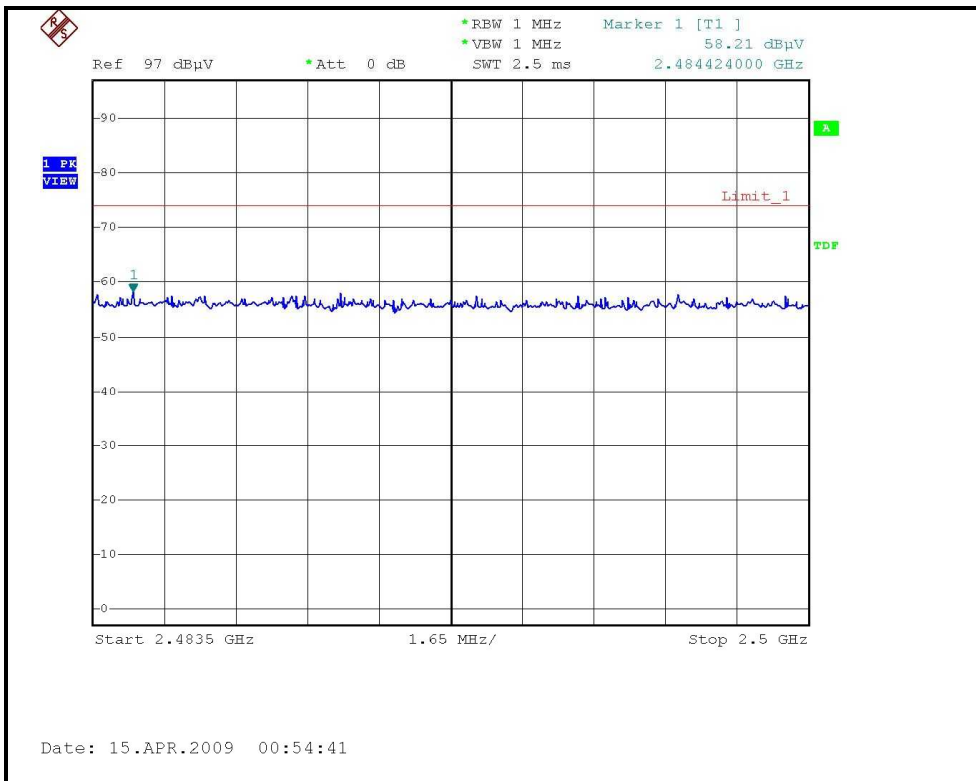



A D T

802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 66%RH 965hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.02 PK	74.00	-2.98	1.47 H	106	40.96	30.06
2	2390.00	53.15 AV	54.00	-0.85	1.47 H	106	23.09	30.06
3	*2412.00	115.17 PK			1.46 H	106	85.02	30.15
4	*2412.00	103.65 AV			1.46 H	106	73.50	30.15
5	4824.00	48.50 PK	74.00	-25.50	1.12 H	215	13.04	35.46
6	4824.00	34.25 AV	54.00	-19.75	1.12 H	215	-1.21	35.46
7	#7236.00	55.43 PK	95.17	-39.74	1.12 H	183	13.58	41.85
8	#7236.00	41.30 AV	83.65	-42.35	1.12 H	183	-0.55	41.85
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.09 PK	74.00	-12.91	1.26 V	162	31.03	30.06
2	2390.00	46.54 AV	54.00	-7.46	1.26 V	162	16.48	30.06
3	*2412.00	104.89 PK			1.29 V	171	74.74	30.15
4	*2412.00	93.50 AV			1.29 V	171	63.35	30.15
5	4824.00	50.68 PK	74.00	-23.32	1.30 V	30	15.22	35.46
6	4824.00	36.77 AV	54.00	-17.23	1.30 V	30	1.31	35.46

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 66%RH 965hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.19 PK	74.00	-8.81	1.48 H	107	35.13	30.06
2	2390.00	53.09 AV	54.00	-0.91	1.48 H	107	23.03	30.06
3	*2437.00	118.40 PK			1.47 H	106	88.16	30.24
4	*2437.00	106.86 AV			1.47 H	106	76.62	30.24
5	2484.65	65.15 PK	74.00	-8.85	1.42 H	109	34.72	30.43
6	2484.65	52.17 AV	54.00	-1.83	1.42 H	109	21.74	30.43
7	4874.00	60.08 PK	74.00	-13.92	1.14 H	136	24.53	35.55
8	4874.00	40.72 AV	54.00	-13.28	1.14 H	136	5.17	35.55
9	7311.00	63.38 PK	74.00	-10.62	1.06 H	116	21.34	42.04
10	7311.00	47.31 AV	54.00	-6.69	1.06 H	116	5.27	42.04
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.99 PK	74.00	-14.01	1.58 V	162	29.93	30.06
2	2390.00	47.55 AV	54.00	-6.45	1.58 V	162	17.49	30.06
3	*2437.00	105.91 PK			1.30 V	164	75.67	30.24
4	*2437.00	95.23 AV			1.30 V	164	64.99	30.24
5	2483.50	58.65 PK	74.00	-15.35	1.53 V	128	28.22	30.43
6	2483.50	46.99 AV	54.00	-7.01	1.53 V	128	16.56	30.43
7	4874.00	55.68 PK	74.00	-18.32	1.24 V	32	20.13	35.55
8	4874.00	38.90 AV	54.00	-15.10	1.24 V	32	3.35	35.55
9	7311.00	62.59 PK	74.00	-11.41	1.51 V	265	20.55	42.04
10	7311.00	46.39 AV	54.00	-7.61	1.51 V	265	4.35	42.04

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 66%RH 965hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	113.42 PK			1.45 H	108	83.08	30.34
2	*2462.00	102.89 AV			1.45 H	108	72.55	30.34
3	2483.50	72.65 PK	74.00	-1.35	1.41 H	109	42.22	30.43
4	2483.50	52.55 AV	54.00	-1.45	1.41 H	109	22.12	30.43
5	4924.00	56.03 PK	74.00	-17.97	1.00 H	208	20.40	35.63
6	4924.00	37.56 AV	54.00	-16.44	1.00 H	208	1.93	35.63
7	7386.00	58.58 PK	74.00	-15.42	1.36 H	59	16.35	42.23
8	7386.00	44.22 AV	54.00	-9.78	1.36 H	59	1.99	42.23

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M



NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.99 PK			1.28 V	169	73.65	30.34
2	*2462.00	92.79 AV			1.28 V	169	62.45	30.34
3	2483.50	62.05 PK	74.00	-11.95	1.23 V	258	31.62	30.43
4	2483.50	45.90 AV	54.00	-8.10	1.23 V	258	15.47	30.43
5	4924.00	51.75 PK	74.00	-22.25	1.24 V	33	16.12	35.63
6	4924.00	37.62 AV	54.00	-16.38	1.24 V	33	1.99	35.63
7	7386.00	60.27 PK	74.00	-13.73	1.48 V	271	18.04	42.23
8	7386.00	44.08 AV	54.00	-9.92	1.48 V	271	1.85	42.23

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T



RESTRICTED BANDEDGE (802.11g MODE, CH1, HORIZONTAL)

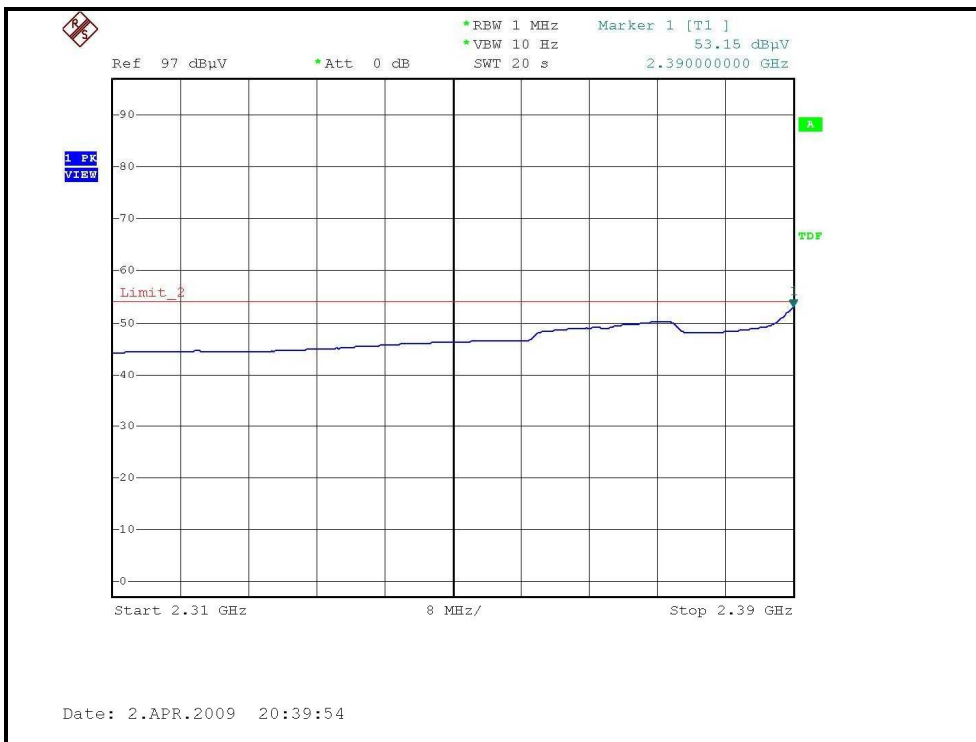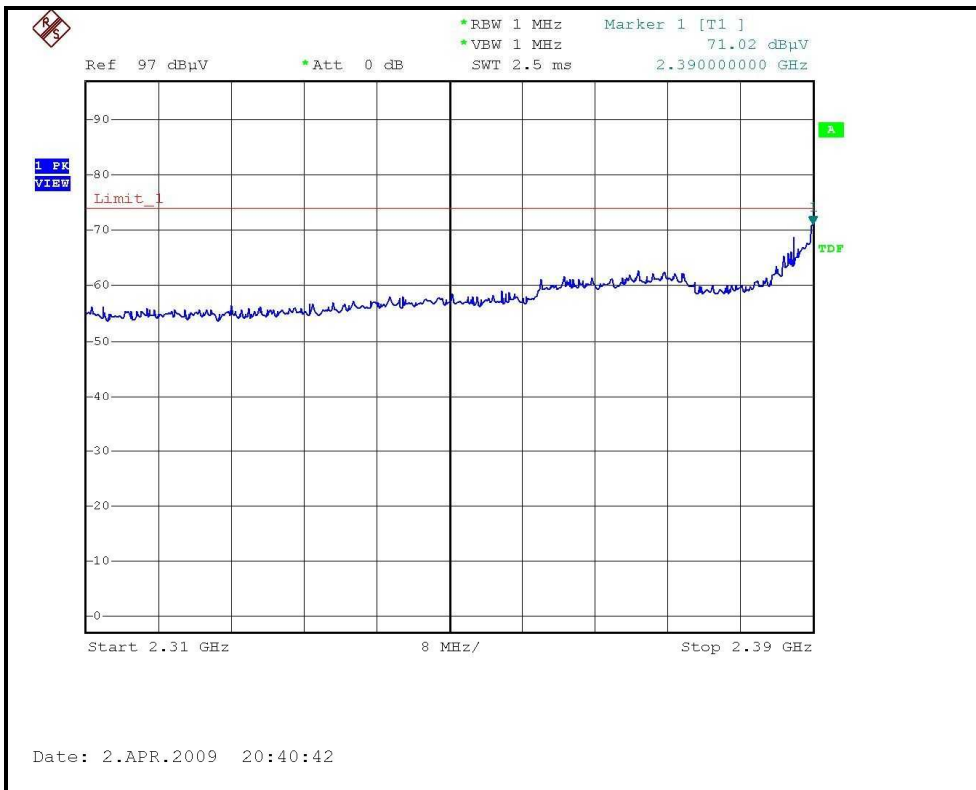



A D T



RESTRICTED BANDEDGE (802.11g MODE, CH1, VERTICAL)

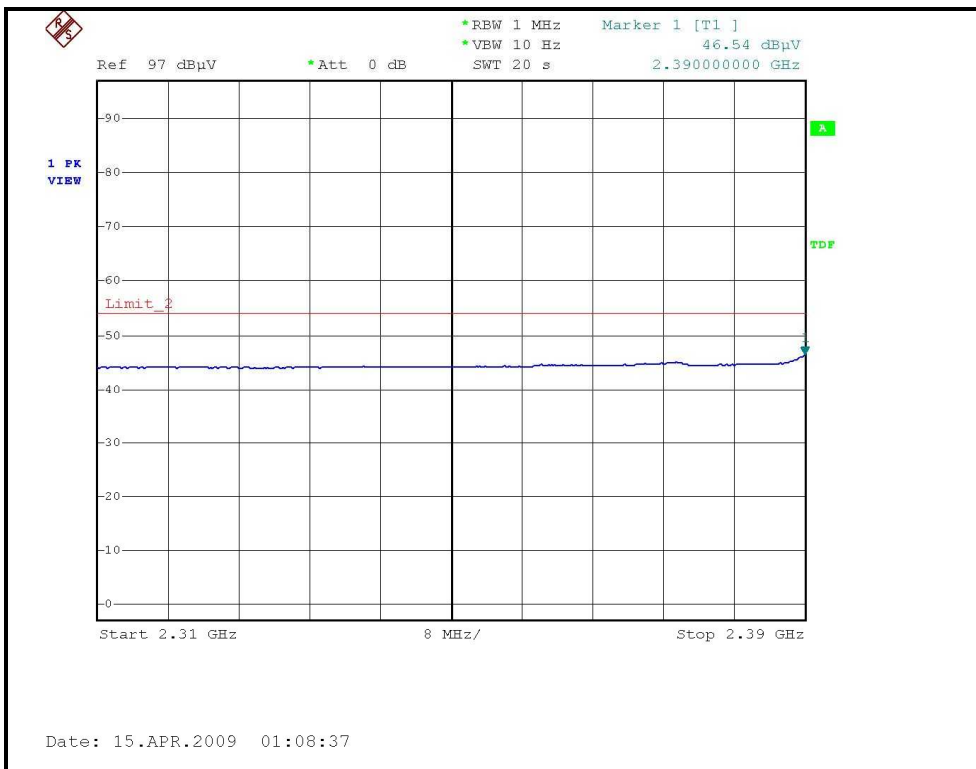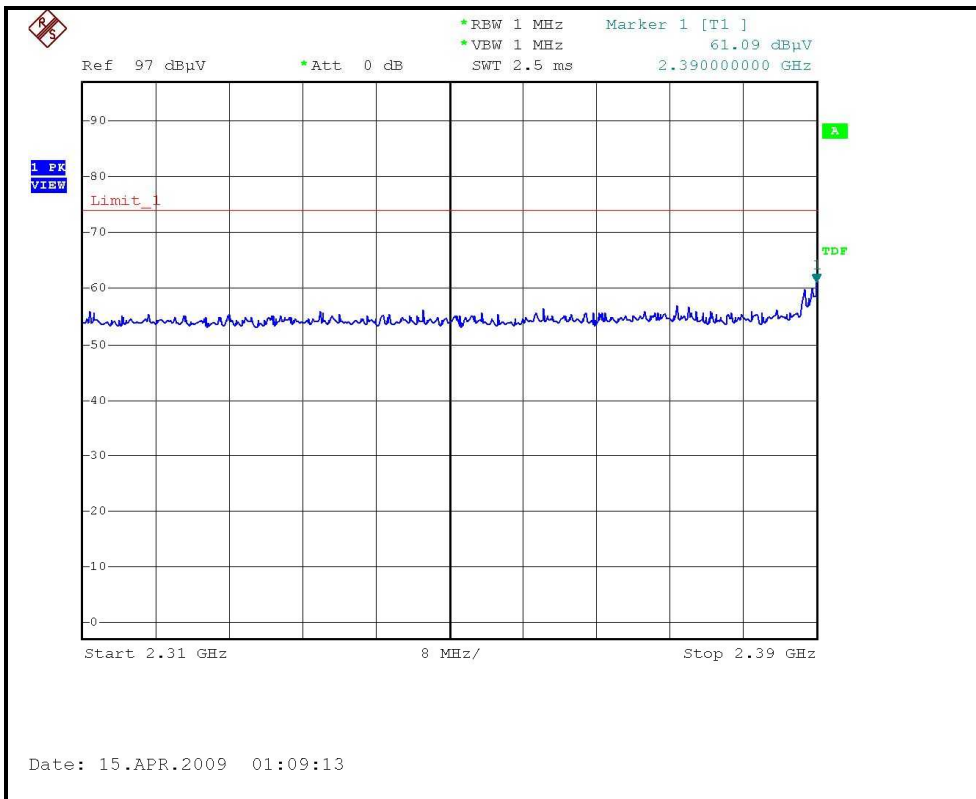



A D T



RESTRICTED BANDEDGE (802.11g MODE,CH11, HORIZONTAL)

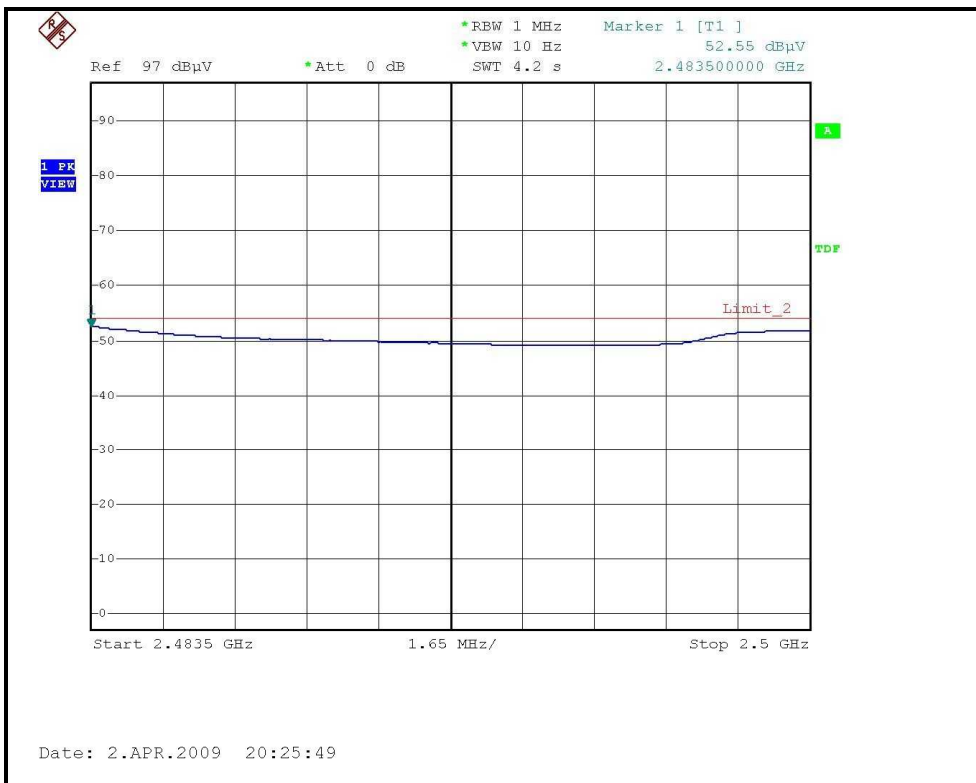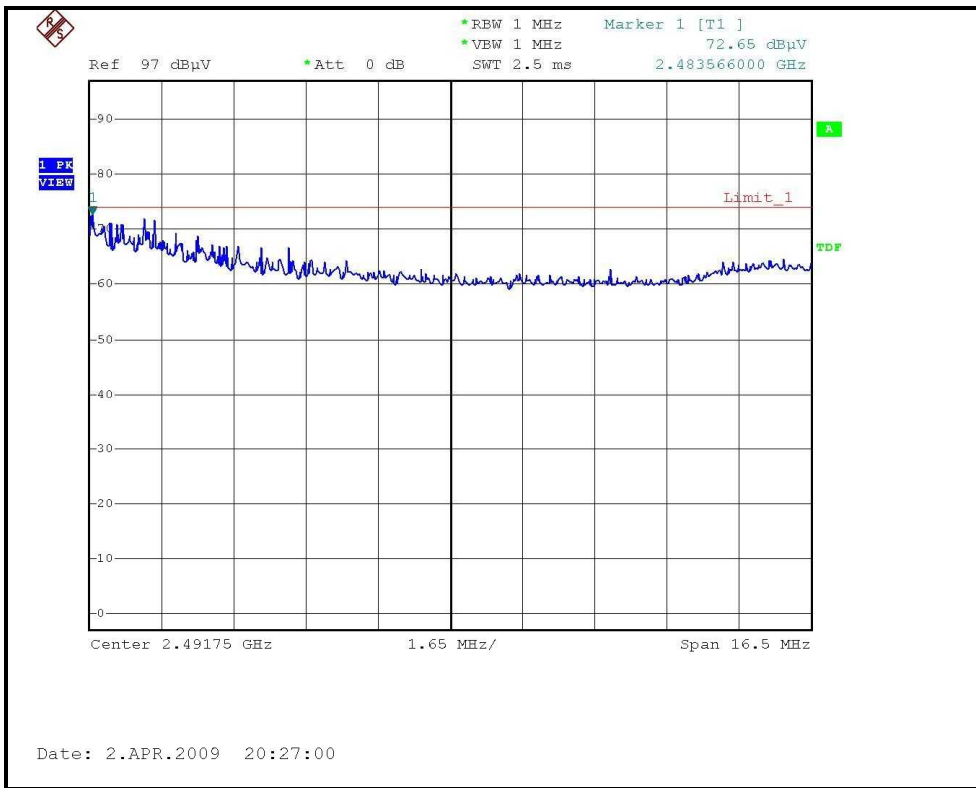



A D T

RESTRICTED BANDEDGE (802.11g MODE,CH11, VERTICAL)

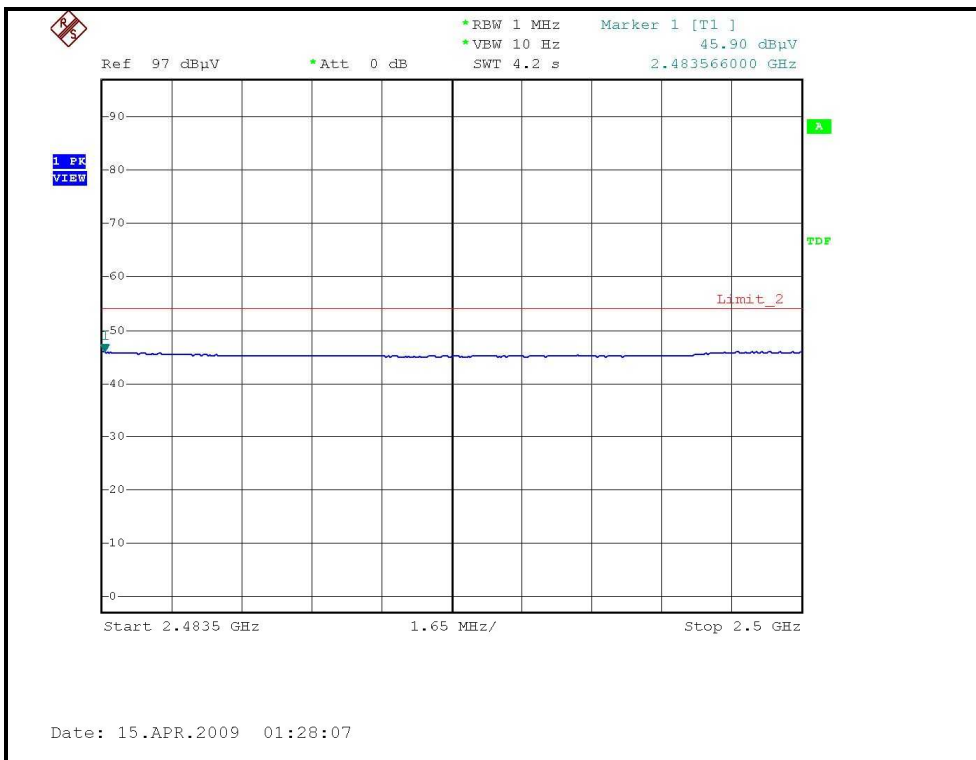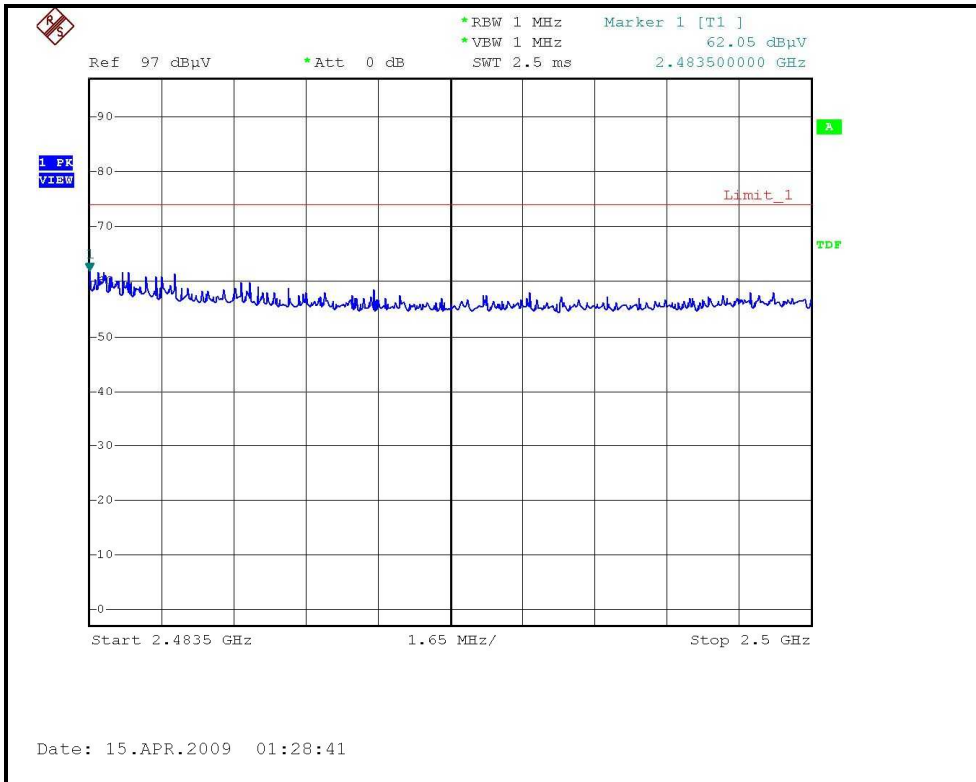



A D T

DRAFT 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 66%RH 965hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.63 PK	74.00	-1.37	1.49 H	108	42.57	30.06
2	2390.00	53.46 AV	54.00	-0.54	1.49 H	108	23.40	30.06
3	*2412.00	113.51 PK			1.49 H	106	83.36	30.15
4	*2412.00	102.39 AV			1.49 H	106	72.24	30.15
5	4824.00	47.21 PK	74.00	-26.79	1.00 H	20	11.75	35.46
6	4824.00	33.46 AV	54.00	-20.54	1.00 H	20	-2.00	35.46
7	#7236.00	53.72 PK	93.51	-39.79	1.00 H	0	11.87	41.85
8	#7236.00	40.27 AV	82.39	-42.12	1.00 H	0	-1.58	41.85
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.00 PK	74.00	-9.00	1.29 V	166	34.94	30.06
2	2390.00	47.49 AV	54.00	-6.51	1.29 V	166	17.43	30.06
3	*2412.00	99.58 PK			1.52 V	171	69.43	30.15
4	*2412.00	89.72 AV			1.52 V	171	59.57	30.15
5	4824.00	45.08 PK	74.00	-28.92	1.19 V	33	9.62	35.46
6	4824.00	33.19 AV	54.00	-20.81	1.19 V	33	-2.27	35.46

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 66%RH 965hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.06 PK	74.00	-7.94	1.49 H	106	36.00	30.06
2	2390.00	53.50 AV	54.00	-0.50	1.49 H	106	23.44	30.06
3	*2437.00	116.63 PK			1.47 H	105	86.39	30.24
4	*2437.00	105.64 AV			1.47 H	105	75.40	30.24
5	2483.50	64.87 PK	74.00	-9.13	1.42 H	109	34.44	30.43
6	2483.50	52.38 AV	54.00	-1.62	1.42 H	109	21.95	30.43
7	4874.00	56.09 PK	74.00	-17.91	1.15 H	139	20.54	35.55
8	4874.00	37.00 AV	54.00	-17.00	1.15 H	139	1.45	35.55
9	7311.00	60.27 PK	74.00	-13.73	1.54 H	117	18.23	42.04
10	7311.00	44.91 AV	54.00	-9.09	1.54 H	117	2.87	42.04
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.28 PK	74.00	-13.72	1.19 V	39	30.22	30.06
2	2390.00	47.59 AV	54.00	-6.41	1.19 V	39	17.53	30.06
3	*2437.00	101.48 PK			1.53 V	169	71.24	30.24
4	*2437.00	92.01 AV			1.53 V	169	61.77	30.24
5	2483.50	58.72 PK	74.00	-15.28	1.21 V	48	28.29	30.43
6	2483.50	46.45 AV	54.00	-7.55	1.21 V	48	16.02	30.43
7	4874.00	51.46 PK	74.00	-22.54	1.18 V	33	15.91	35.55
8	4874.00	34.58 AV	54.00	-19.42	1.18 V	33	-0.97	35.55
9	7311.00	58.86 PK	74.00	-15.14	1.68 V	298	16.82	42.04
10	7311.00	42.99 AV	54.00	-11.01	1.68 V	298	0.95	42.04

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 66%RH 965hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	114.10 PK			1.44 H	107	83.76	30.34
2	*2462.00	102.65 AV			1.44 H	107	72.31	30.34
3	2483.50	73.48 PK	74.00	-0.52	1.43 H	108	43.05	30.43
4	2483.50	52.82 AV	54.00	-1.18	1.43 H	108	22.39	30.43
5	4924.00	57.44 PK	74.00	-16.56	1.00 H	205	21.81	35.63
6	4924.00	37.81 AV	54.00	-16.19	1.00 H	205	2.18	35.63
7	7386.00	61.19 PK	74.00	-12.81	1.00 H	117	18.96	42.23
8	7386.00	45.51 AV	54.00	-8.49	1.00 H	117	3.28	42.23

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M



NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	100.50 PK			1.54 V	173	70.16	30.34
2	*2462.00	90.02 AV			1.54 V	173	59.68	30.34
3	2483.50	66.51 PK	74.00	-7.49	1.39 V	263	36.08	30.43
4	2483.50	47.80 AV	54.00	-6.20	1.39 V	263	17.37	30.43
5	4924.00	46.72 PK	74.00	-27.28	1.20 V	28	11.09	35.63
6	4924.00	32.57 AV	54.00	-21.43	1.20 V	28	-3.06	35.63
7	7386.00	53.48 PK	74.00	-20.52	1.71 V	300	11.25	42.23
8	7386.00	39.97 AV	54.00	-14.03	1.71 V	300	-2.26	42.23

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T



RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE, CH1, HORIZONTAL)

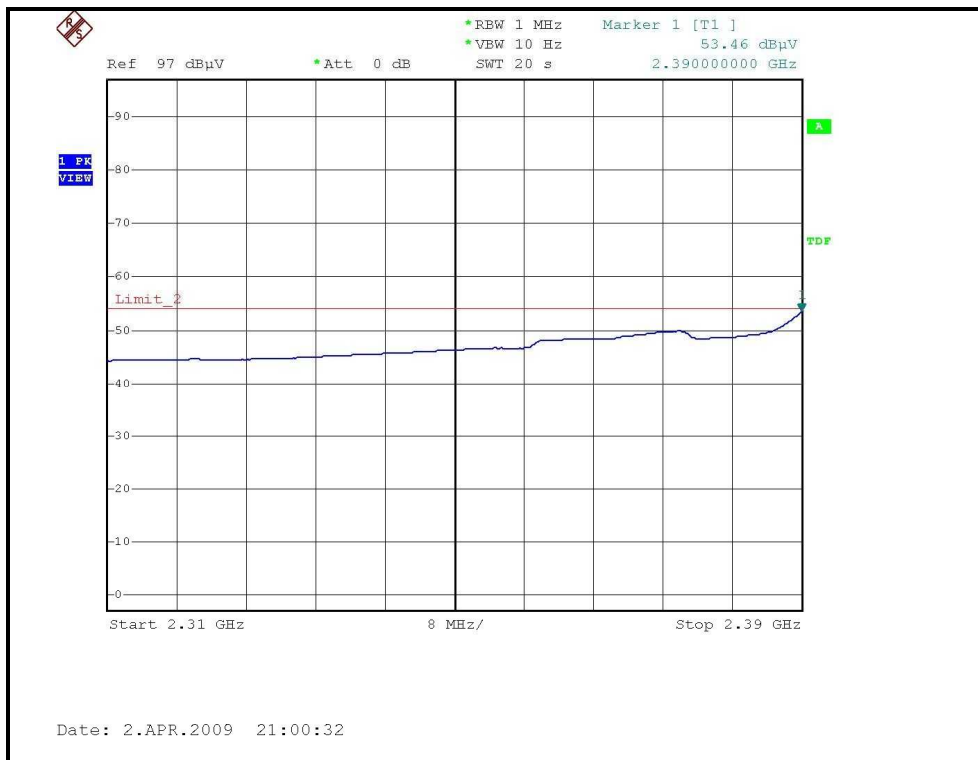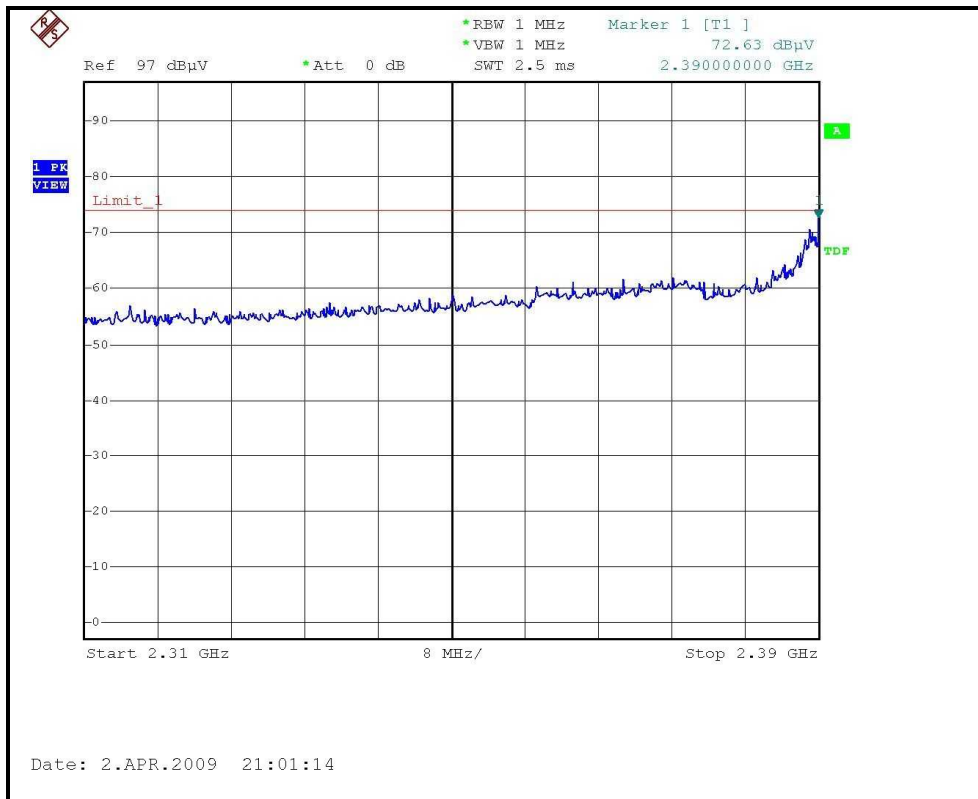



A D T



RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE,CH1, VERTICAL)

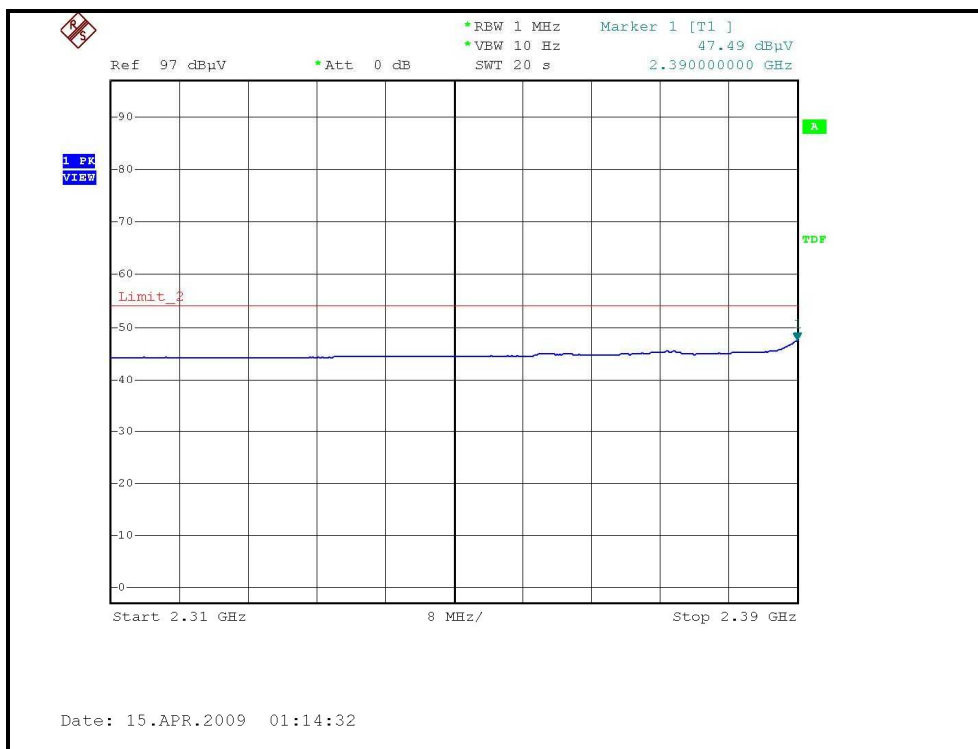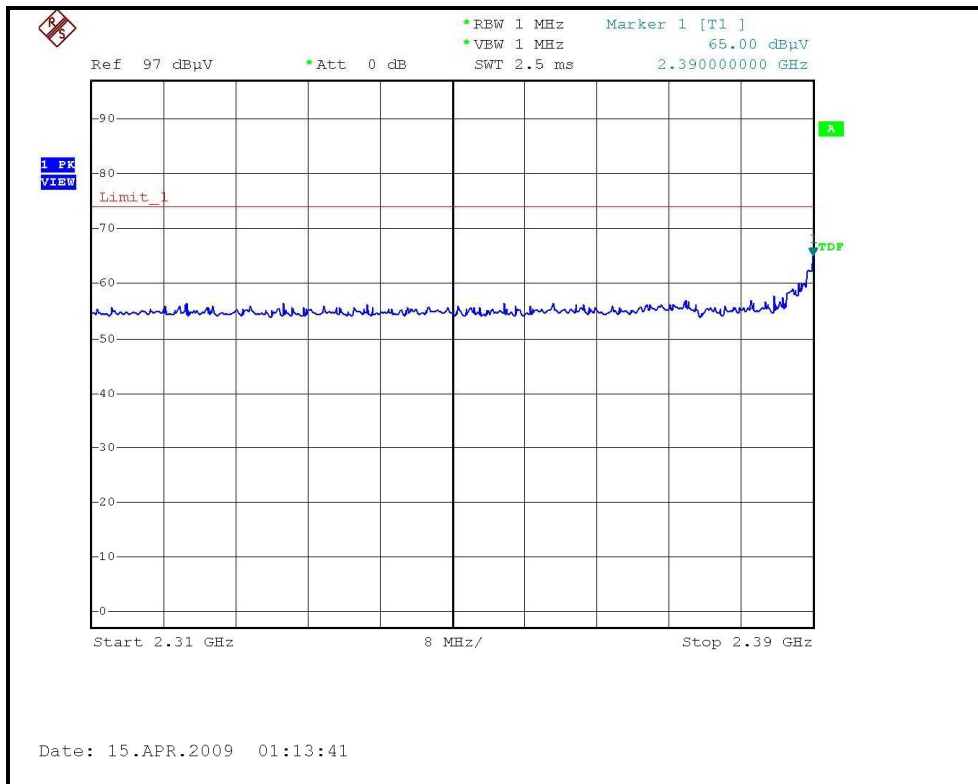



A D T



RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE, CH11, HORIZONTAL)

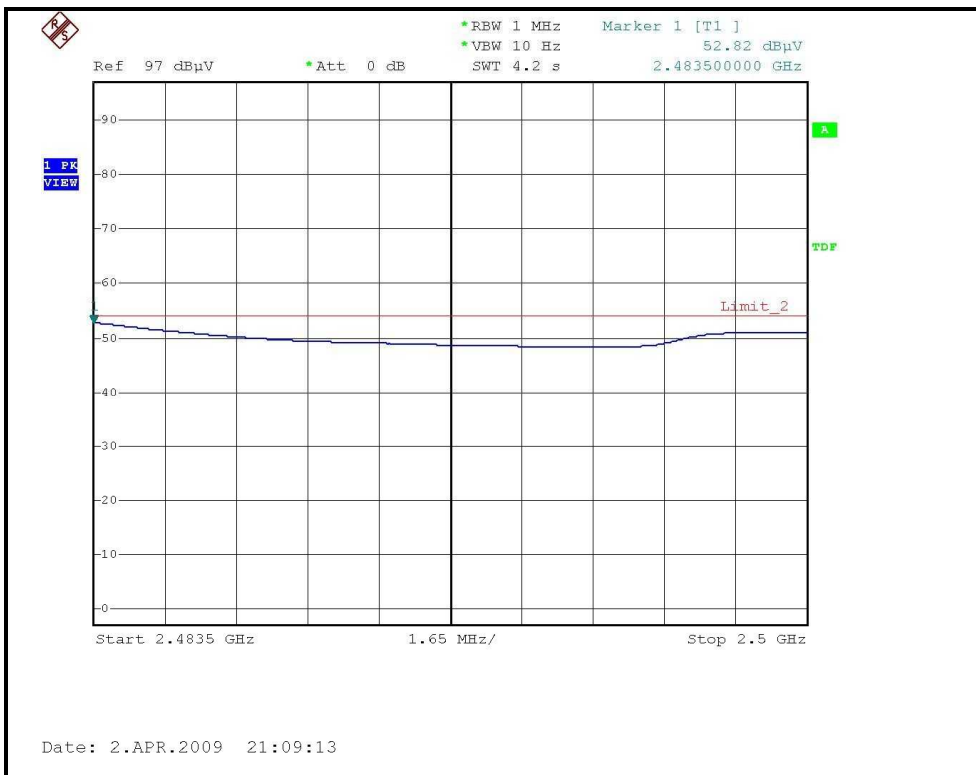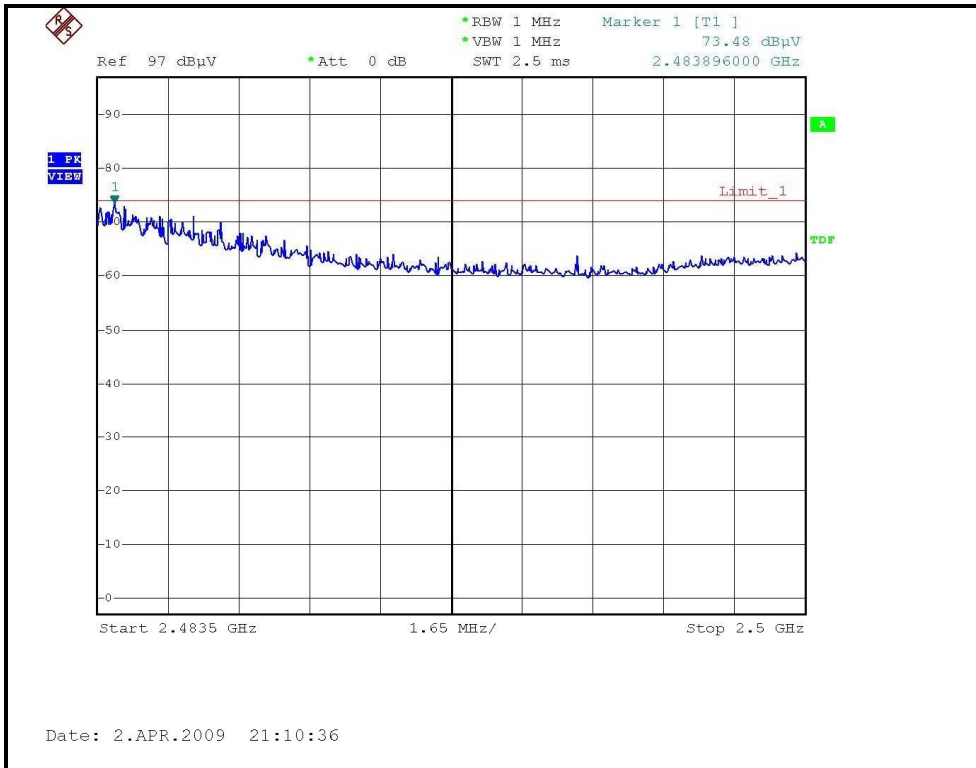



A D T

RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE,CH11, VERTICAL)

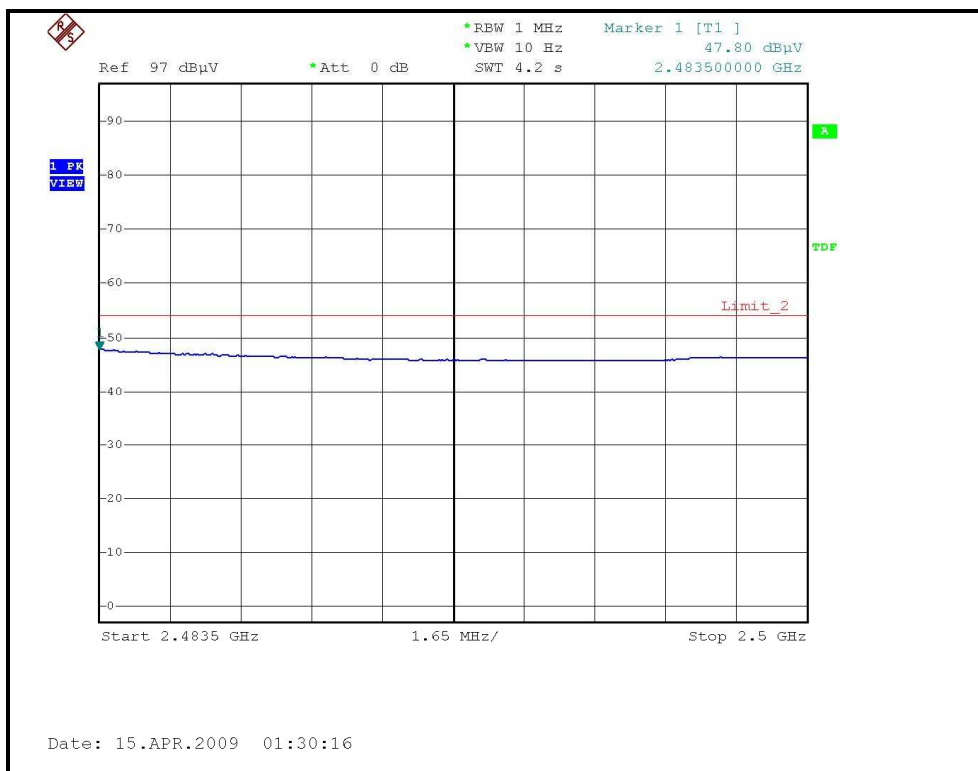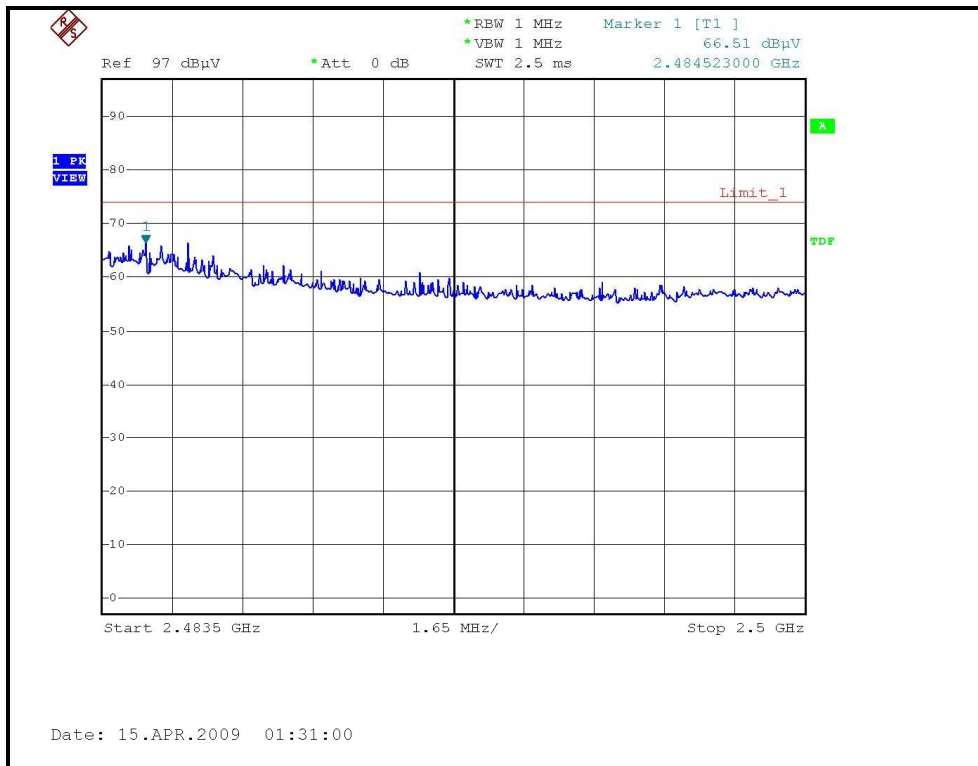



A D T

DRAFT 802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 66%RH 965hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.63 PK	74.00	-2.37	1.48 H	107	41.57	30.06
2	2390.00	53.27 AV	54.00	-0.73	1.48 H	107	23.21	30.06
3	*2422.00	108.15 PK			1.48 H	109	77.96	30.19
4	*2422.00	96.96 AV			1.48 H	109	66.77	30.19
5	4844.00	47.63 PK	74.00	-26.37	1.05 H	213	12.13	35.50
6	4844.00	33.62 AV	54.00	-20.38	1.05 H	213	-1.88	35.50
7	7266.00	54.17 PK	74.00	-19.83	1.00 H	51	12.24	41.93
8	7266.00	40.36 AV	54.00	-13.64	1.00 H	51	-1.57	41.93

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.47 PK	74.00	-10.53	1.31 V	250	33.41	30.06
2	2390.00	47.31 AV	54.00	-6.69	1.31 V	250	17.25	30.06
3	*2422.00	103.58 PK			1.52 V	173	73.39	30.19
4	*2422.00	83.77 AV			1.52 V	173	53.58	30.19
5	4844.00	44.22 PK	74.00	-29.78	1.38 V	33	8.72	35.50
6	4844.00	31.89 AV	54.00	-22.11	1.38 V	33	-3.61	35.50
7	7266.00	51.50 PK	74.00	-22.50	1.50 V	301	9.57	41.93
8	7266.00	38.05 AV	54.00	-15.95	1.50 V	301	-3.88	41.93

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 66%RH 965hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.10 PK	74.00	-2.90	1.49 H	105	41.04	30.06
2	2390.00	52.99 AV	54.00	-1.01	1.49 H	105	22.93	30.06
3	*2437.00	110.94 PK			1.48 H	107	80.70	30.24
4	*2437.00	100.20 AV			1.48 H	107	69.96	30.24
5	2483.50	67.84 PK	74.00	-6.16	1.40 H	109	37.41	30.43
6	2483.50	50.69 AV	54.00	-3.31	1.40 H	109	20.26	30.43
7	4874.00	48.60 PK	74.00	-25.40	1.07 H	185	13.05	35.55
8	4874.00	34.76 AV	54.00	-19.24	1.07 H	185	-0.79	35.55
9	7311.00	54.70 PK	74.00	-19.30	1.08 H	114	12.66	42.04
10	7311.00	41.15 AV	54.00	-12.85	1.08 H	114	-0.89	42.04
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.95 PK	74.00	-14.05	1.30 V	59	29.89	30.06
2	2390.00	48.57 AV	54.00	-5.43	1.30 V	59	18.51	30.06
3	*2437.00	98.01 PK			1.53 V	169	67.77	30.24
4	*2437.00	87.59 AV			1.53 V	169	57.35	30.24
5	2483.50	57.23 PK	74.00	-16.77	1.41 V	300	26.80	30.43
6	2483.50	46.88 AV	54.00	-7.12	1.41 V	300	16.45	30.43
7	4874.00	46.72 PK	74.00	-27.28	1.29 V	33	11.17	35.55
8	4874.00	33.29 AV	54.00	-20.71	1.29 V	33	-2.26	35.55
9	7311.00	52.65 PK	74.00	-21.35	1.65 V	300	10.61	42.04
10	7311.00	40.08 AV	54.00	-13.92	1.65 V	300	-1.96	42.04

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 66%RH 965hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	107.99 PK			1.48 H	107	77.69	30.30
2	*2452.00	96.64 AV			1.48 H	107	66.34	30.30
3	2483.50	73.02 PK	74.00	-0.98	1.41 H	109	42.59	30.43
4	2483.50	53.12 AV	54.00	-0.88	1.41 H	109	22.69	30.43
5	4904.00	48.05 PK	74.00	-25.95	1.12 H	181	12.45	35.60
6	4904.00	34.47 AV	54.00	-19.53	1.12 H	181	-1.13	35.60
7	7356.00	53.02 PK	74.00	-20.98	1.07 H	108	10.87	42.16
8	7356.00	40.16 AV	54.00	-13.84	1.07 H	108	-2.00	42.16

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M



NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	103.95 PK			1.53 V	168	73.65	30.30
2	*2452.00	84.11 AV			1.53 V	168	53.81	30.30
3	2483.50	63.95 PK	74.00	-10.05	1.35 V	244	33.52	30.43
4	2483.50	46.30 AV	54.00	-7.70	1.35 V	244	15.87	30.43
5	4904.00	43.87 PK	74.00	-30.13	1.38 V	66	8.27	35.60
6	4904.00	32.01 AV	54.00	-21.99	1.38 V	66	-3.59	35.60
7	7356.00	51.69 PK	74.00	-22.31	1.58 V	311	9.53	42.16
8	7356.00	39.05 AV	54.00	-14.95	1.58 V	311	-3.11	42.16

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*”: Fundamental frequency.



A D T



RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE, CH1, HORIZONTAL)

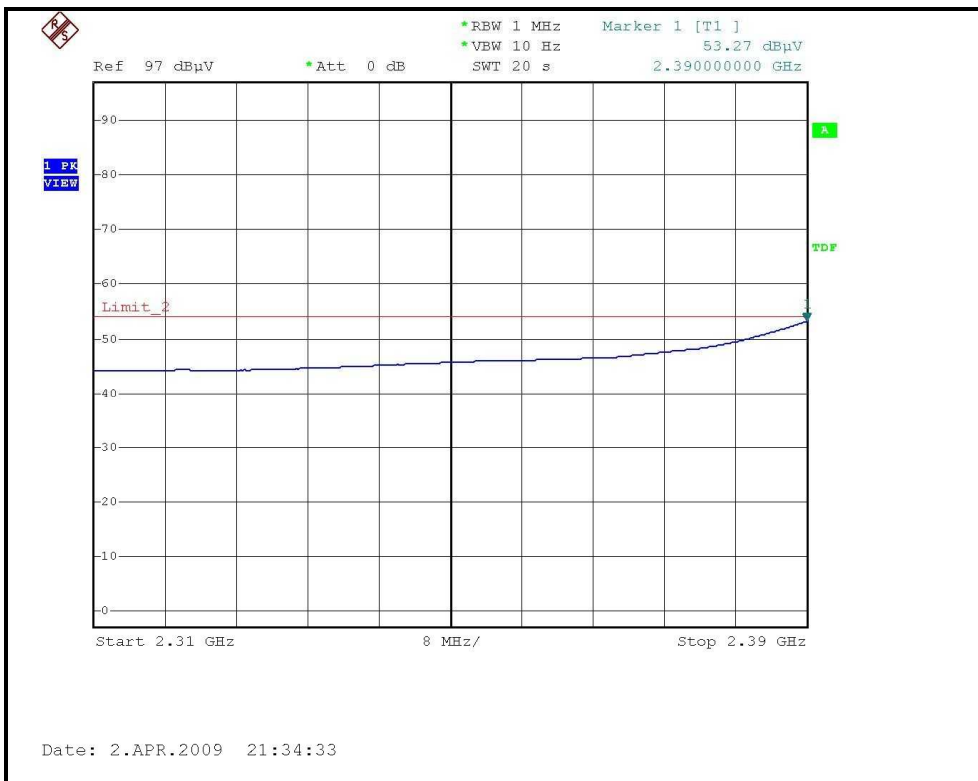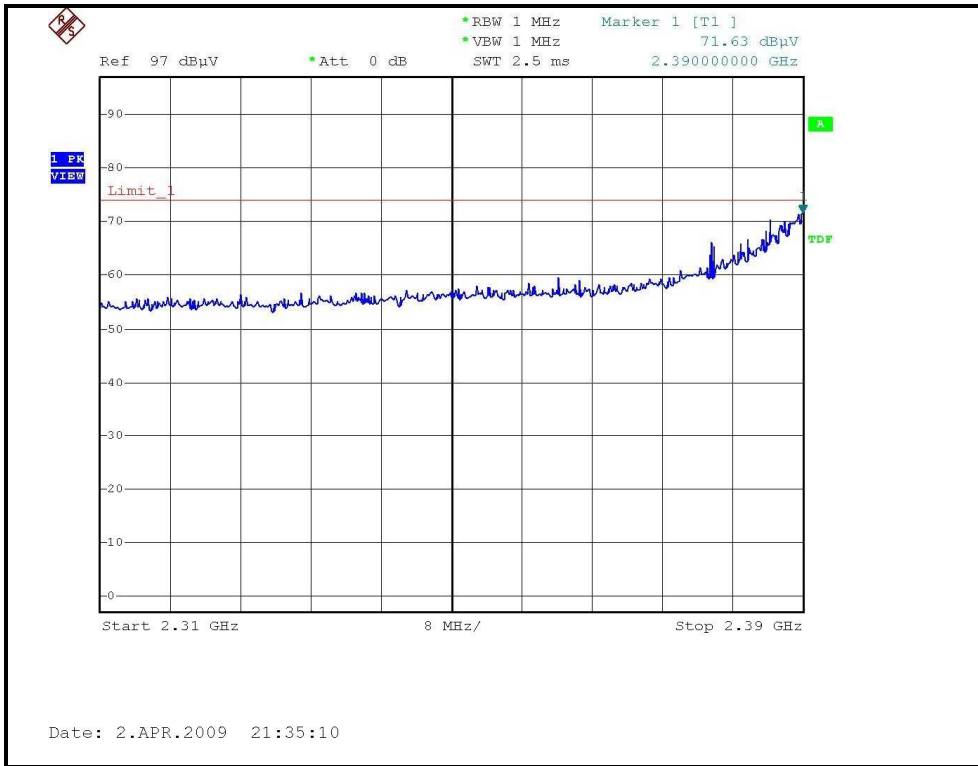



A D T



RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE, CH1, VERTICAL)

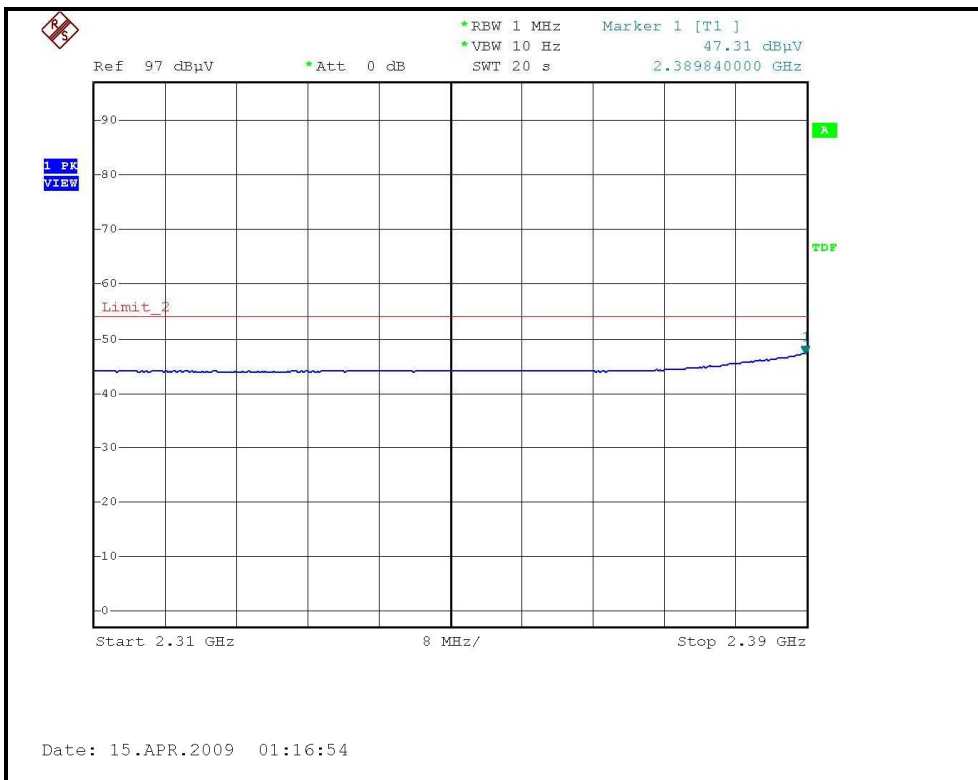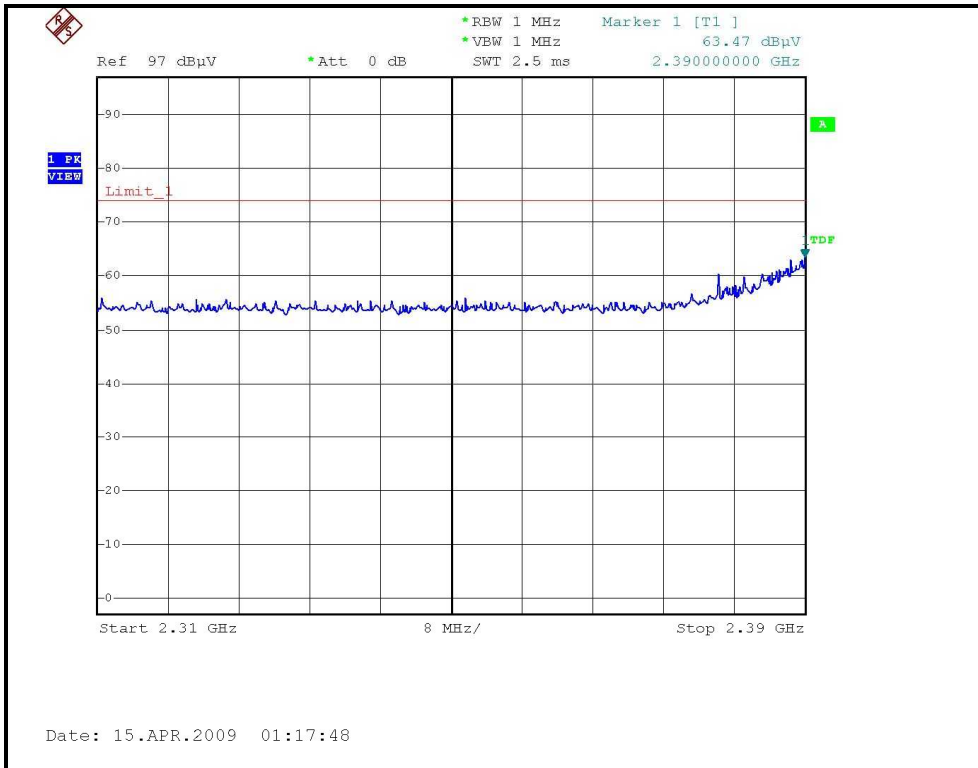



A D T



RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE,CH7, HORIZONTAL)

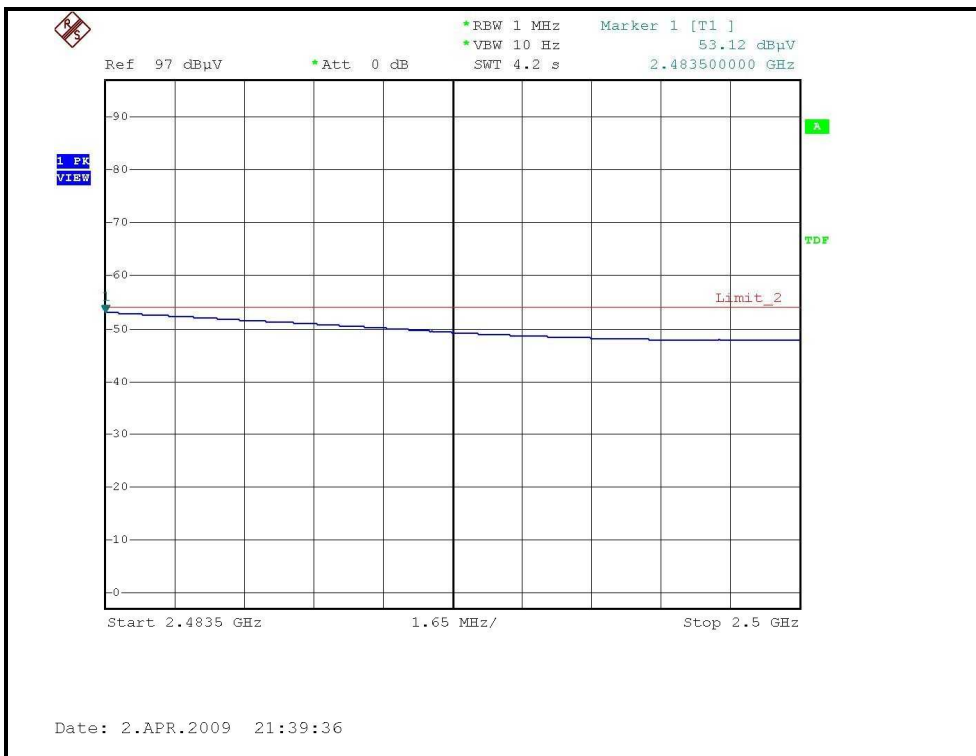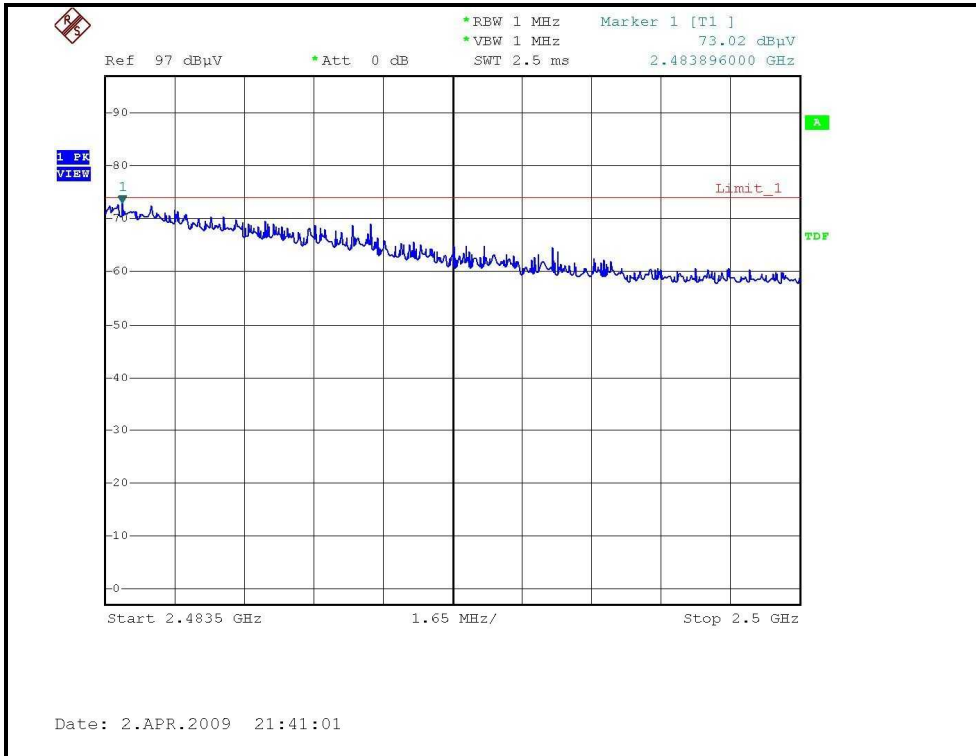



A D T

RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE,CH7, VERTICAL)

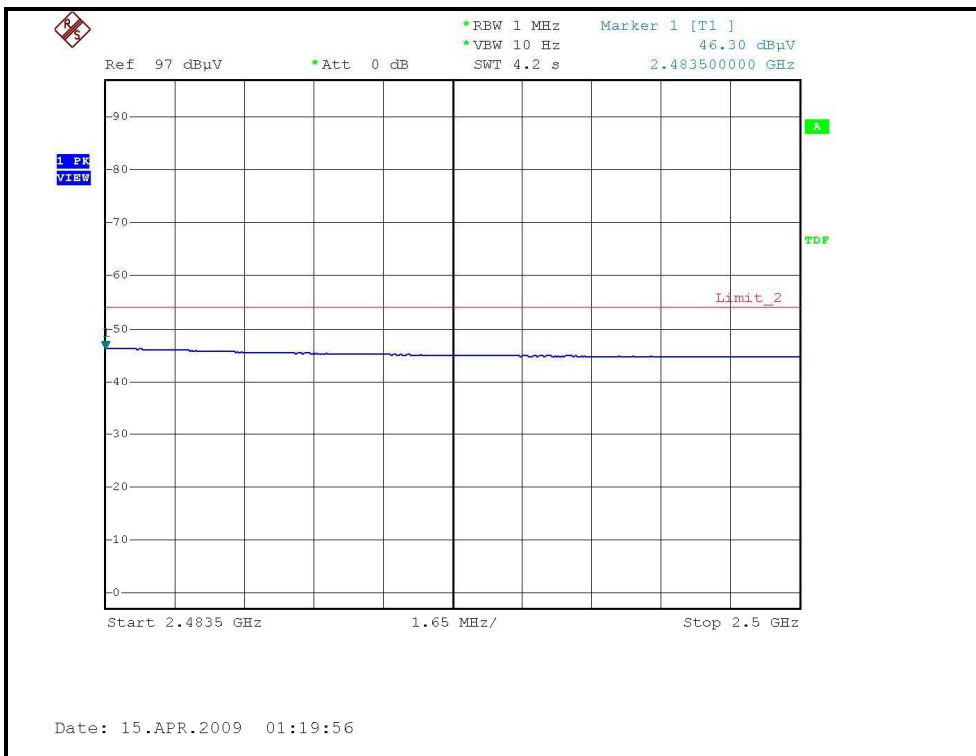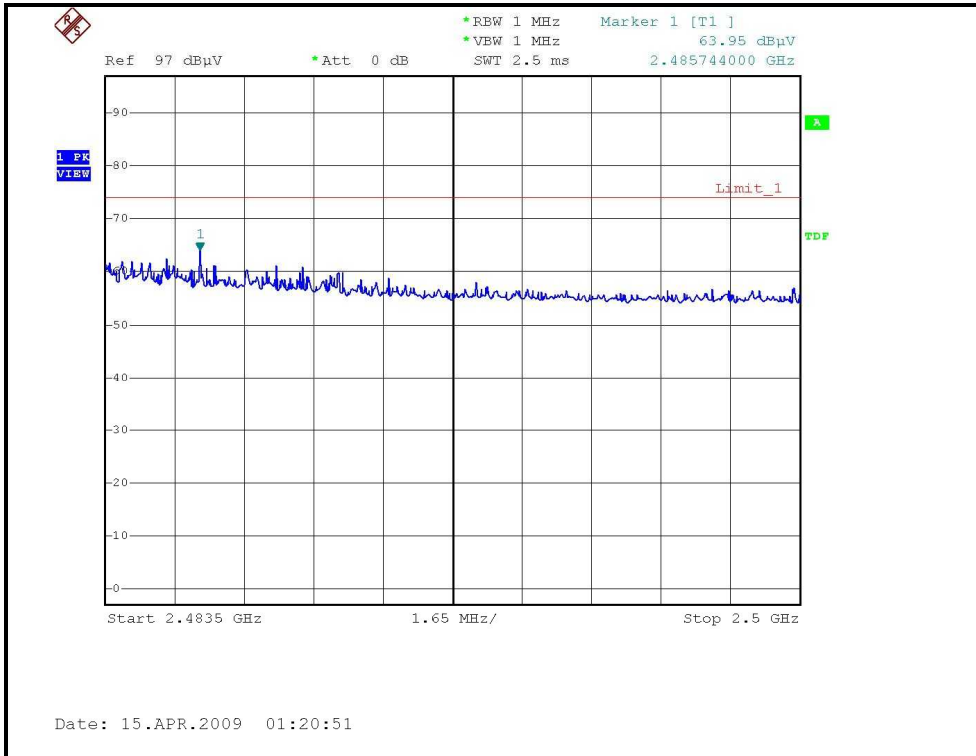



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated DATE	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 09, 2008	Dec. 08, 2009

NOTE:

- 1.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T


4.3.7 TEST RESULTS

802.11b DSSS MODULATION:

MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	11.79	0.5	PASS
6	2437	12.21	0.5	PASS
11	2462	12.58	0.5	PASS


CH1

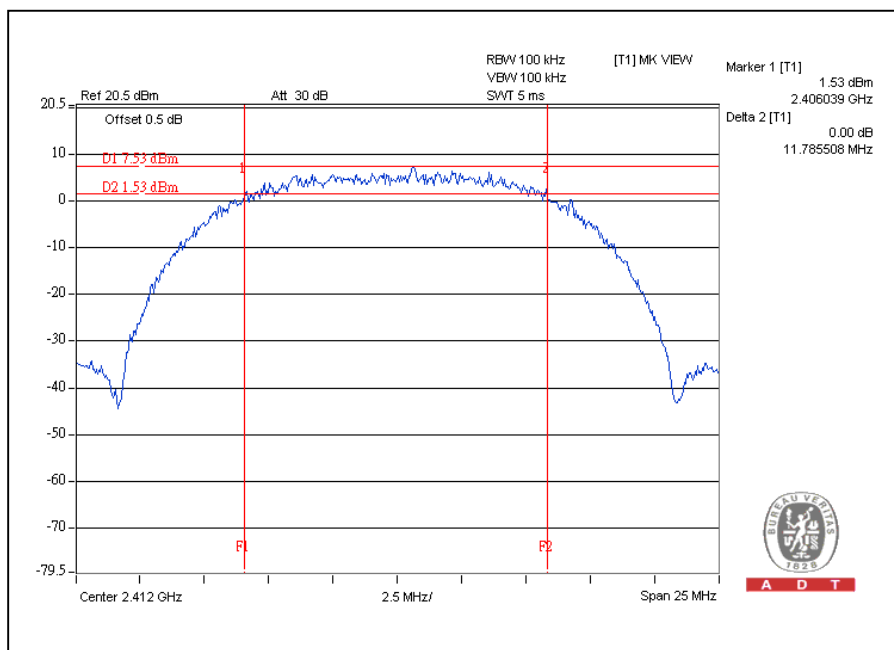




A D T

CH6

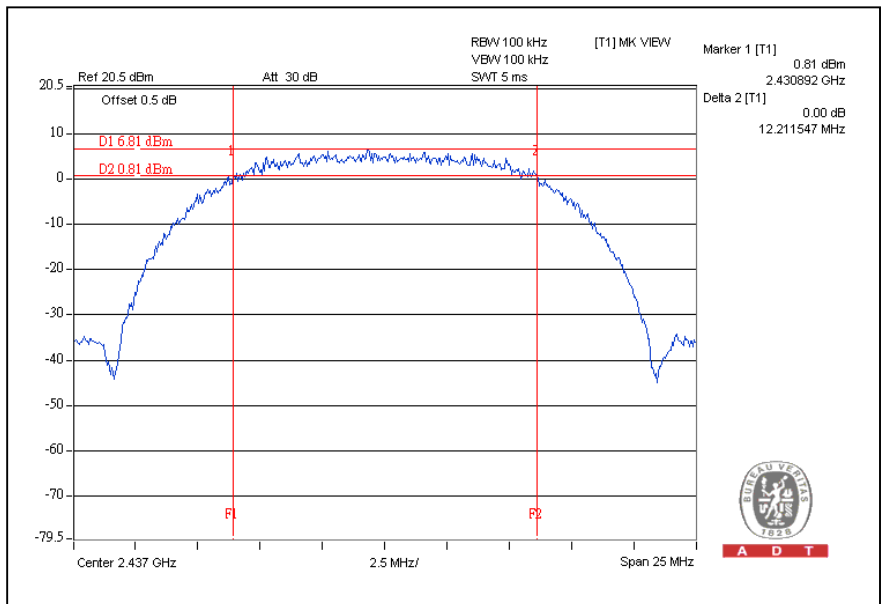

CH11

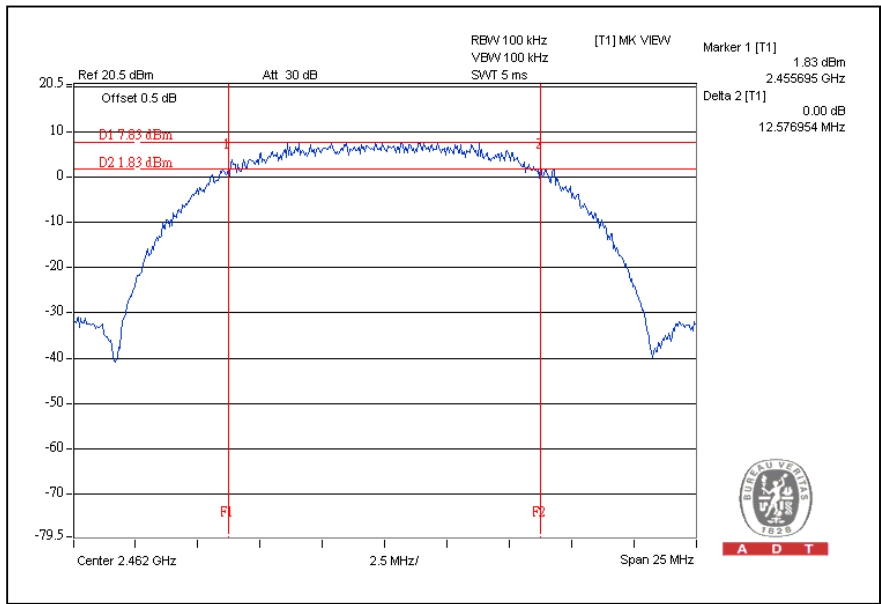




A D T

802.11g OFDM MODULATION:


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.43	0.5	PASS
6	2437	16.42	0.5	PASS
11	2462	16.49	0.5	PASS


CH1

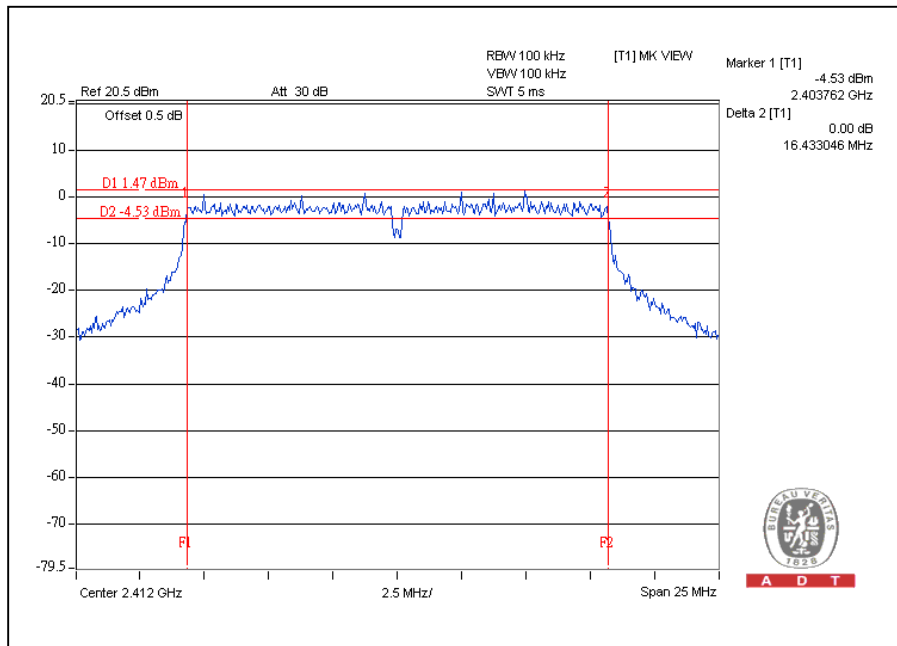

CH6

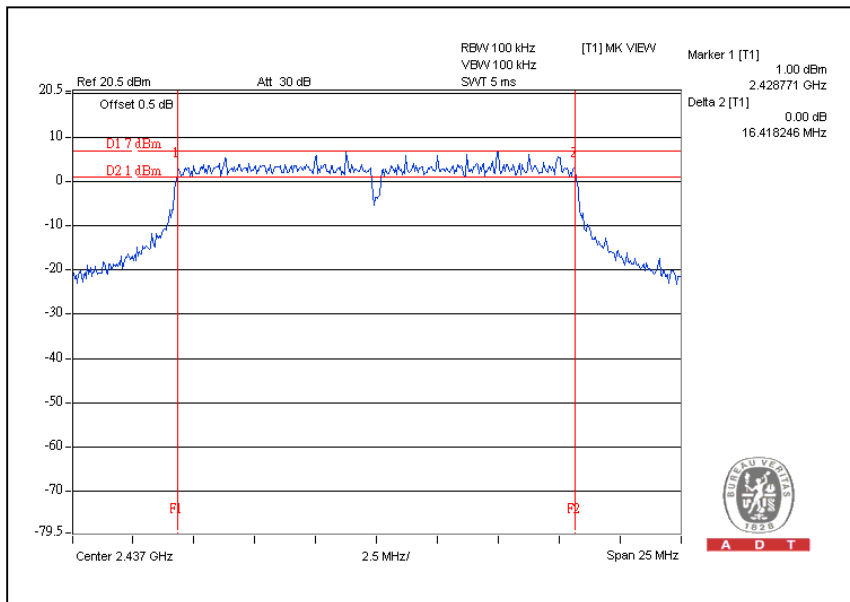

CH11

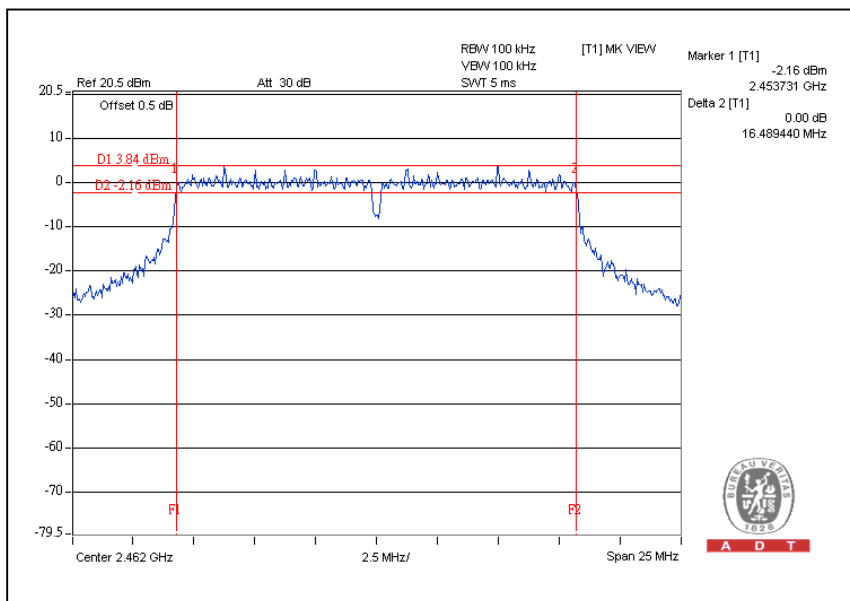




A D T

DRAFT 802.11n (20MHz) OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	6.5Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.68	0.5	PASS
6	2437	17.68	0.5	PASS
11	2462	17.67	0.5	PASS

CH1

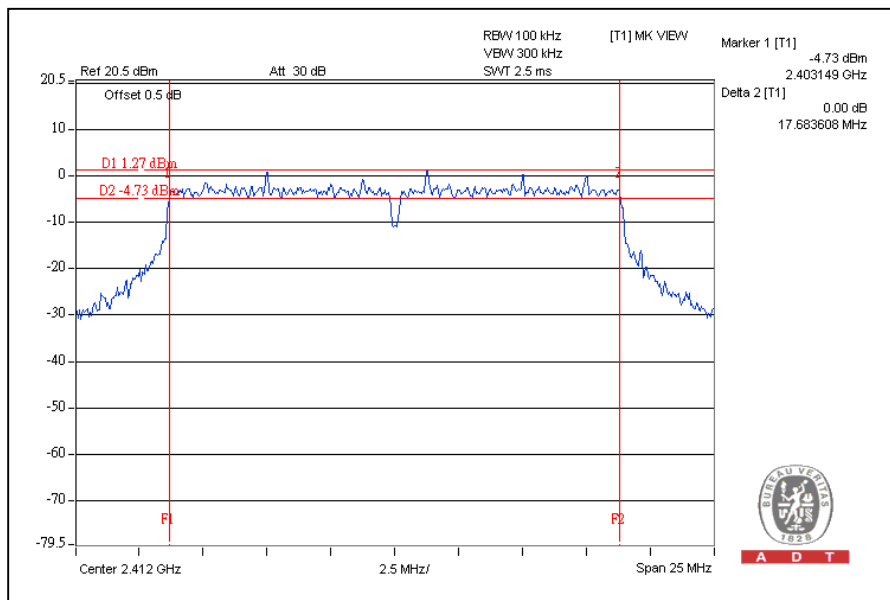


A D T




A D T

CH6

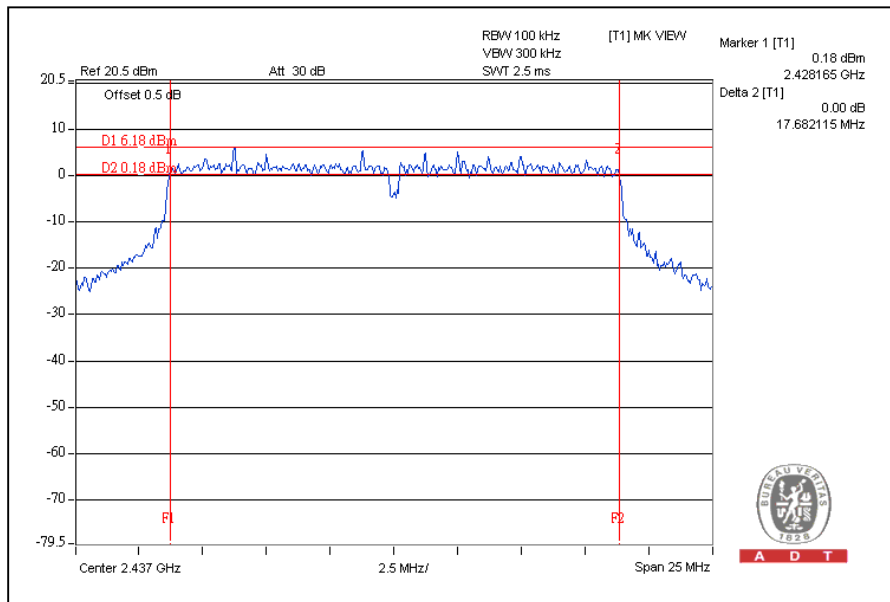

CH11

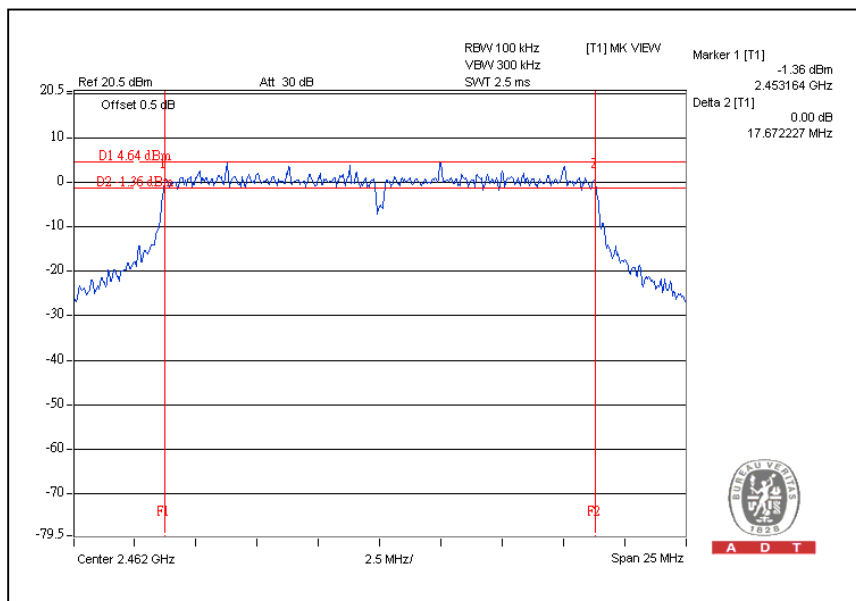




A D T

DRAFT 802.11n (40MHz) OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	13.5Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2422	36.51	0.5	PASS
4	2437	36.48	0.5	PASS
7	2452	36.50	0.5	PASS

CH1

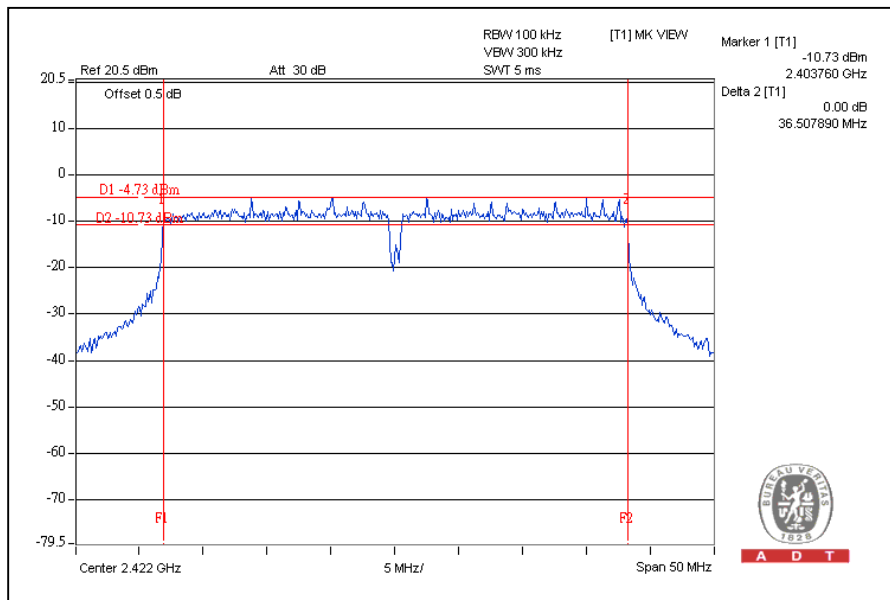


A D T




A D T

CH4

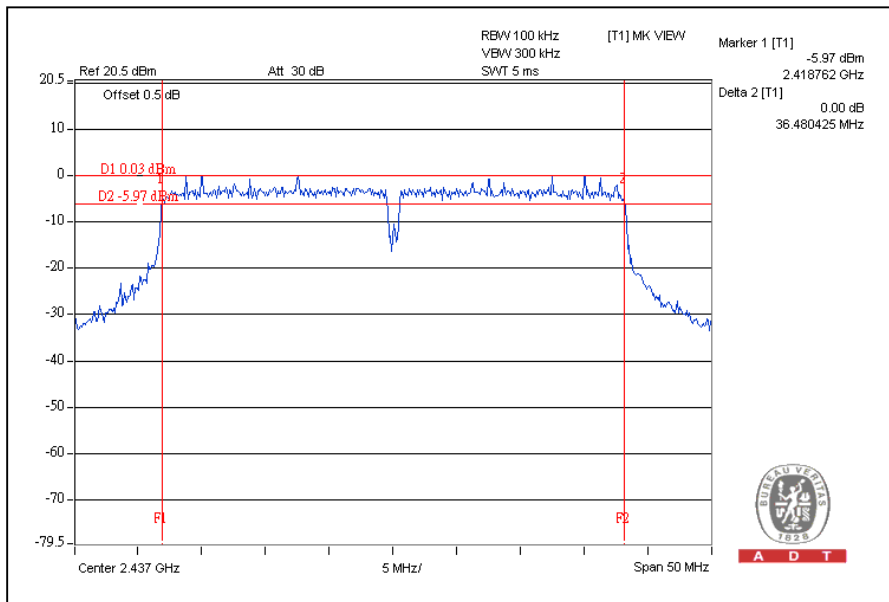

CH7

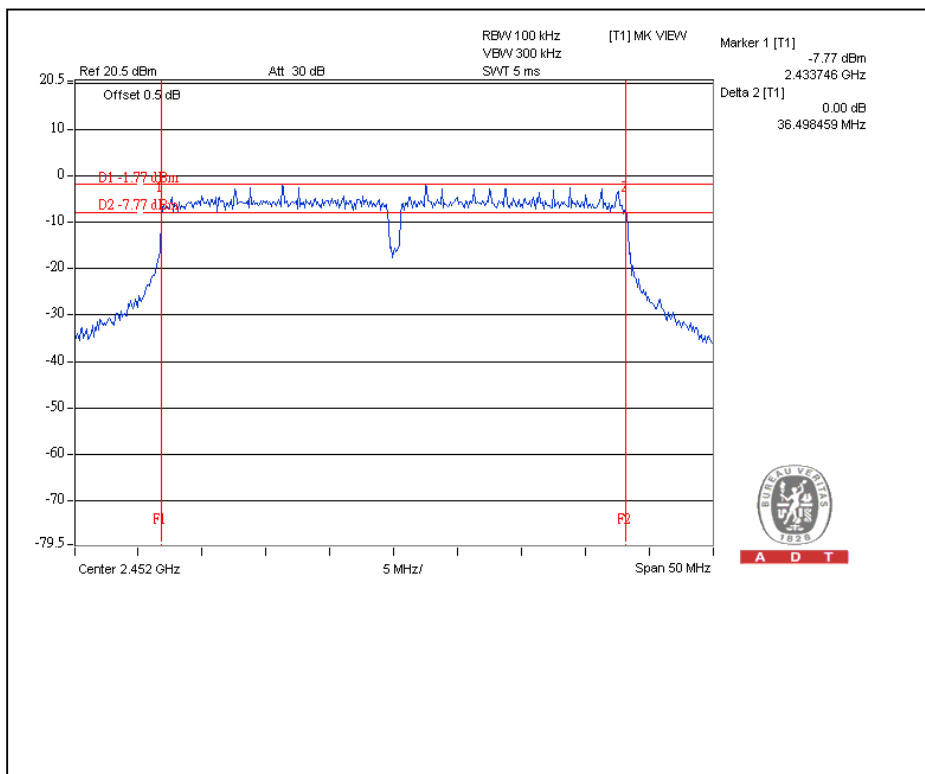

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

Description & Manufacturer	Model no.	Serial No.	Calibrated date	Calibrated Until
Anritsu Power Meter	ML2495A	0824006	NA	NA
Pulse Power Sensor	MA2411B	0738172	NA	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

1. The transmitter output was connected to the power meter through an attenuator; the bandwidth of the fundamental frequency was measured with the power meter.
2. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

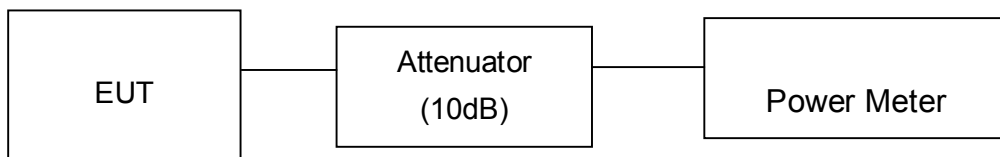

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



A D T

4.4.7 TEST RESULTS

802.11b DSSS MODULATION:

MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	131.220	21.18	30	PASS
6	2437	197.697	22.96	30	PASS
11	2462	188.799	22.76	30	PASS

802.11g OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	208.449	23.19	30	PASS
6	2437	479.733	26.81	30	PASS
11	2462	324.340	25.11	30	PASS



A D T

DRAFT 802.11n (20MHz) OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	6.5Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	192.752	22.85	30	PASS
6	2437	411.150	26.14	30	PASS
11	2462	341.193	25.33	30	PASS

DRAFT 802.11n (40MHz) OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	26Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2422	109.901	20.41	30	PASS
4	2437	309.742	24.91	30	PASS
7	2452	190.985	22.81	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated DATE	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 09, 2008	Dec. 08, 2009

NOTE:

- 1.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6



A D T


4.5.7 TEST RESULTS

802.11b DSSS MODULATION:

MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2412	-3.54	8	PASS
6	2437	-2.36	8	PASS
11	2462	-0.57	8	PASS


CH1

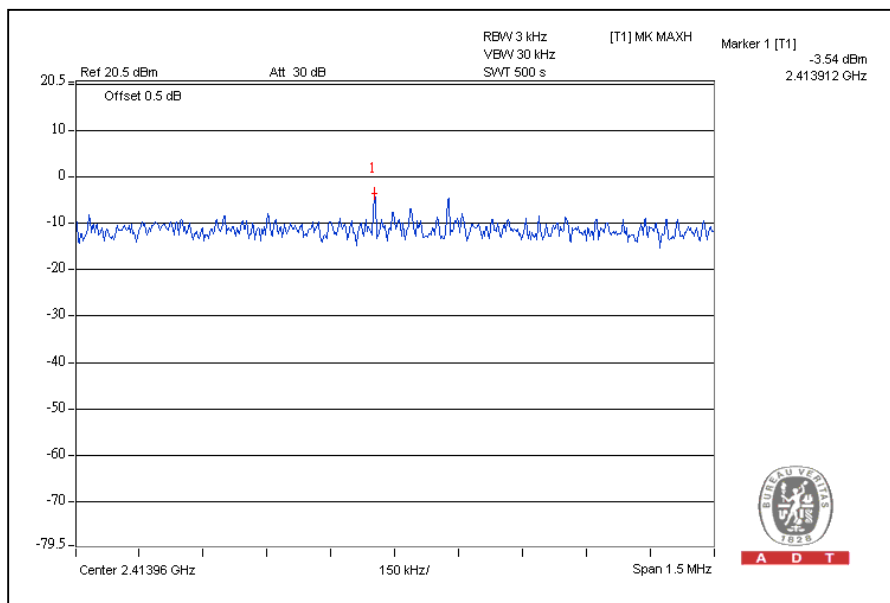




A D T

CH6

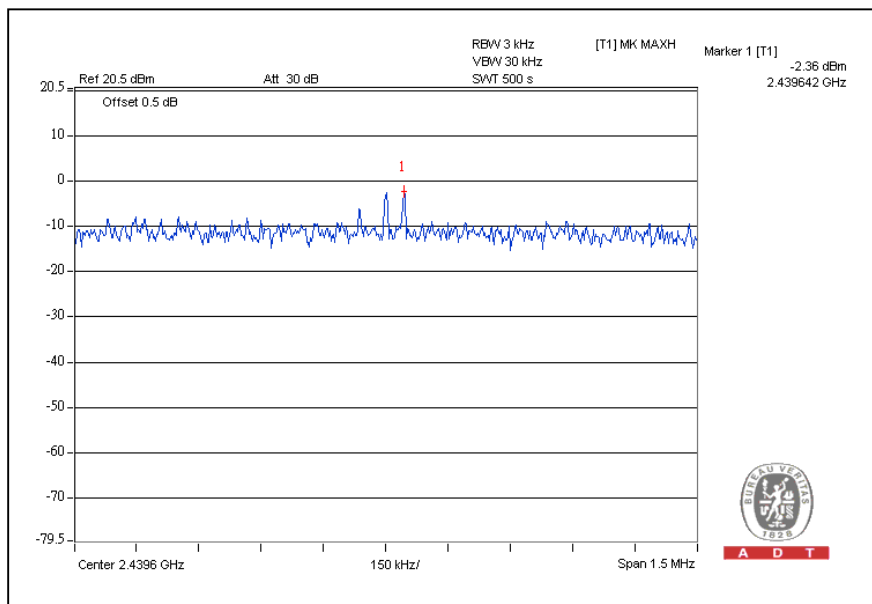

CH11

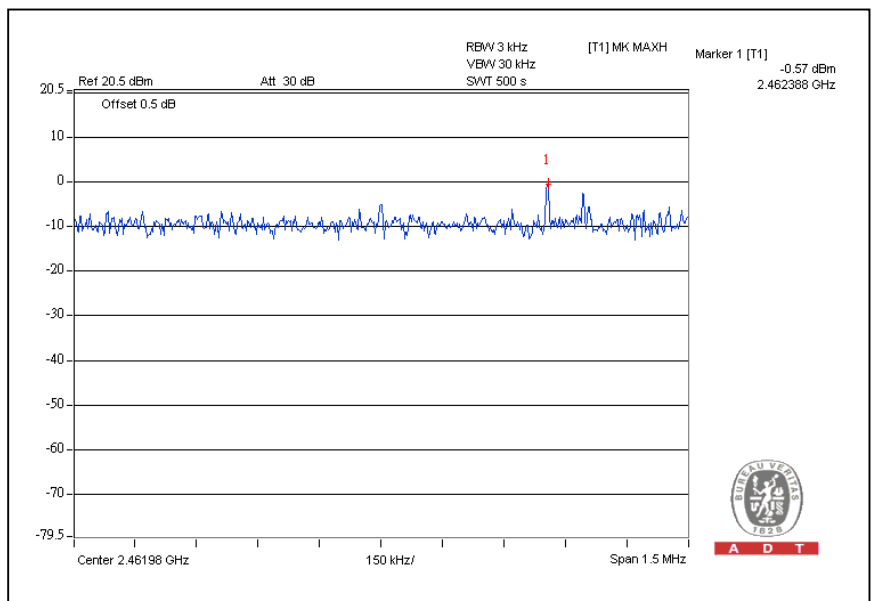




A D T

802.11g OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2412	-12.71	8	PASS
6	2437	-6.54	8	PASS
11	2462	-8.71	8	PASS

CH1

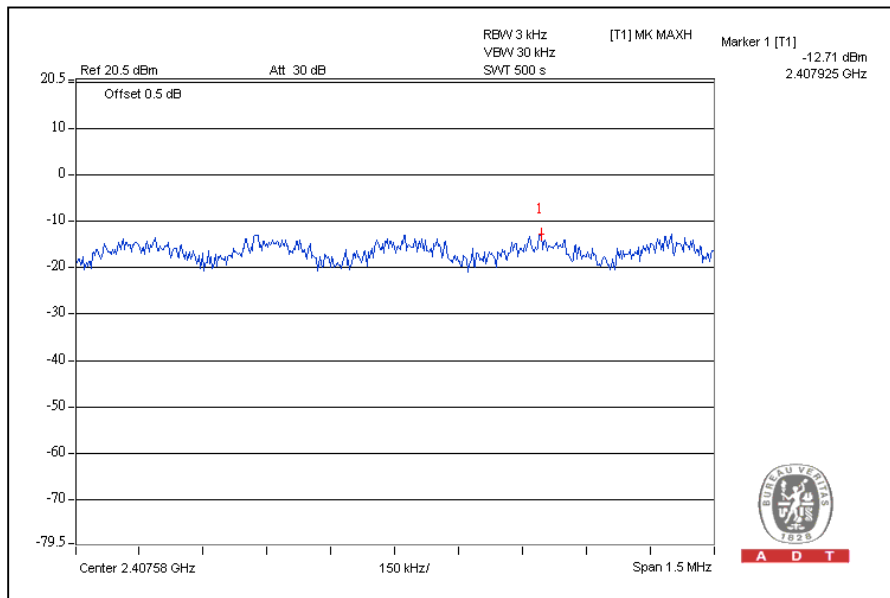


A D T




A D T

CH6

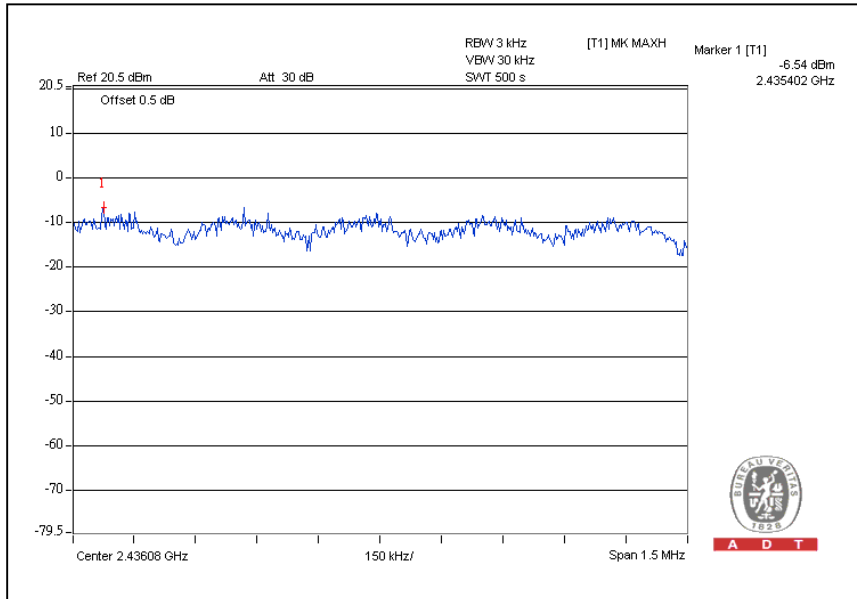

CH11

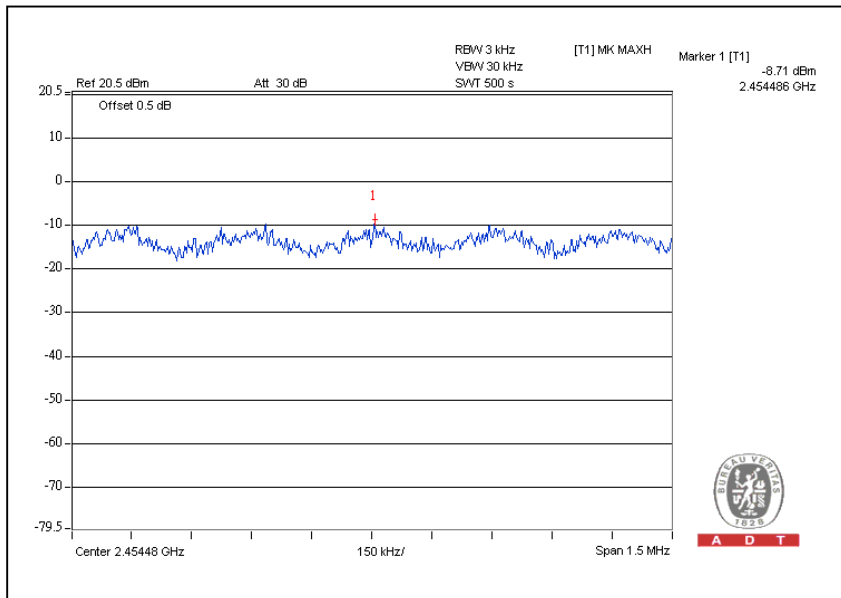




A D T

DRAFT 802.11n (20MHz) OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	6.5Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25 deg.C, 62%RH, 965hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2412	-13.29	8	PASS
6	2437	-8.25	8	PASS
11	2462	-9.05	8	PASS

CH1

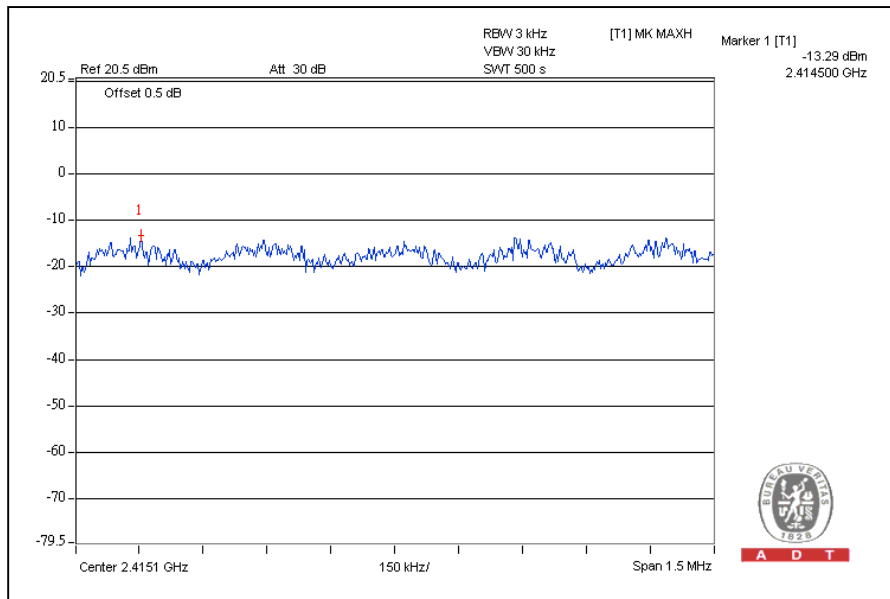


A D T




A D T

CH6

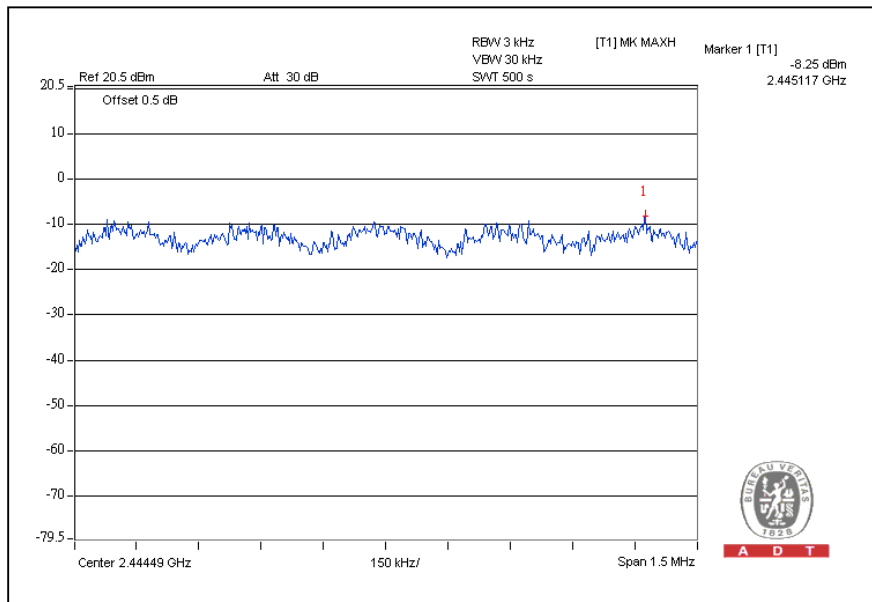

CH11

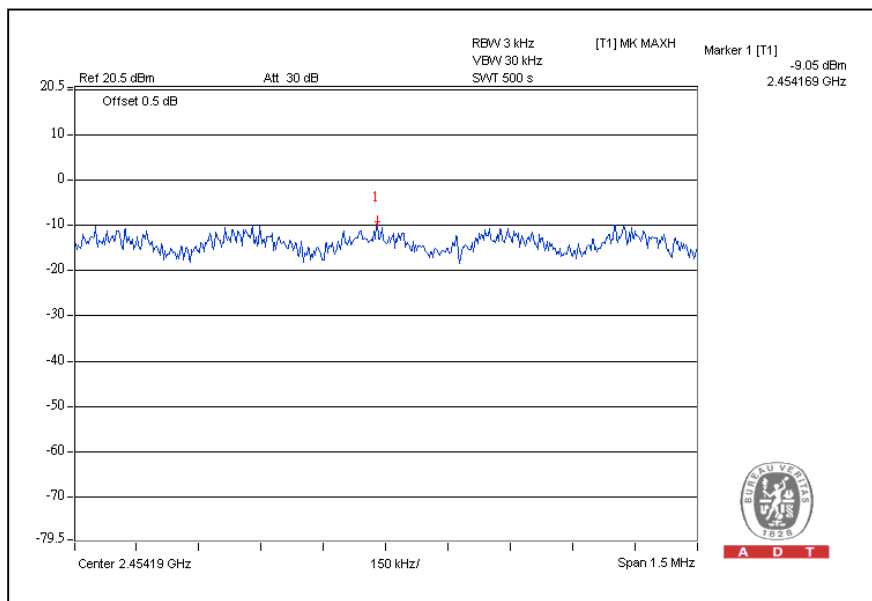




A D T

DRAFT 802.11n (40MHz) OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	13.5Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2422	-18.11	8	PASS
4	2437	-13.27	8	PASS
7	2452	-16.34	8	PASS

CH1

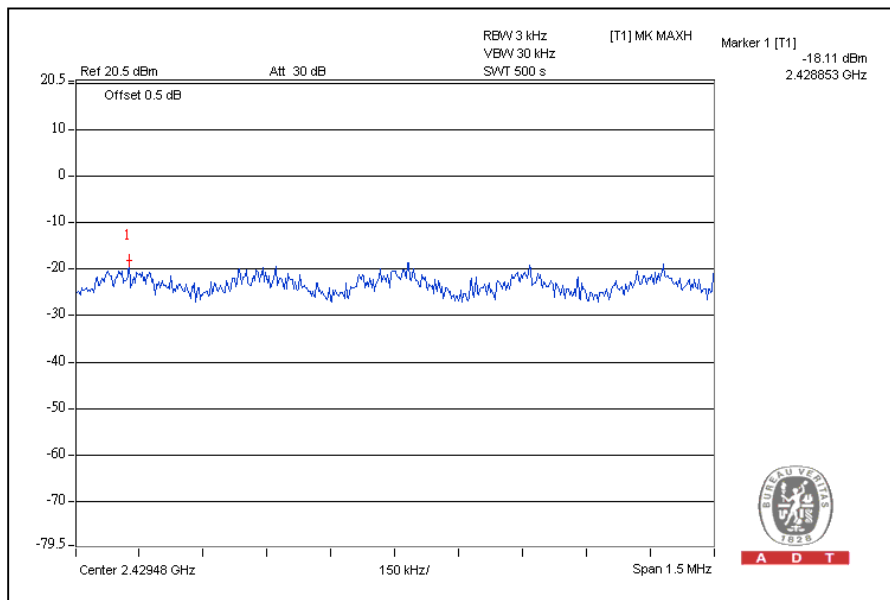


A D T




A D T

CH4

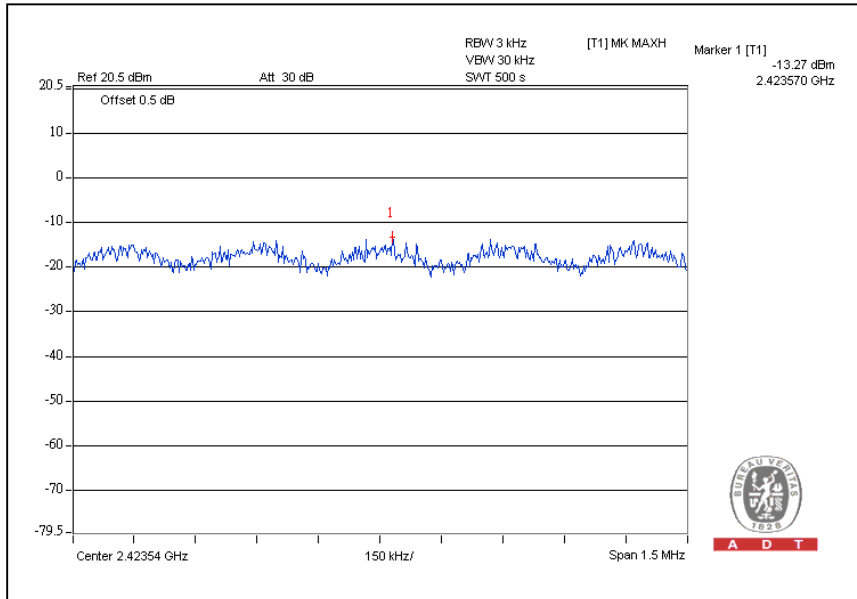

CH7

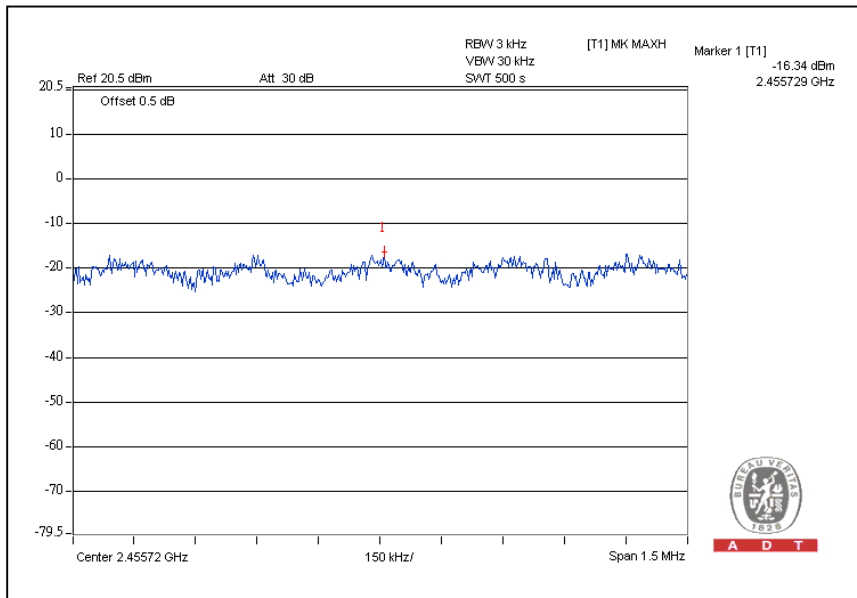

4.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated DATE	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 09, 2008	Dec. 08, 2009

NOTE:

- 1.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (RBW = VBW = 100kHz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION


Same as Item 4.3.6

4.6.6 TEST RESULTS


The spectrum plots are attached on the following images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS MODULATION:

CH1

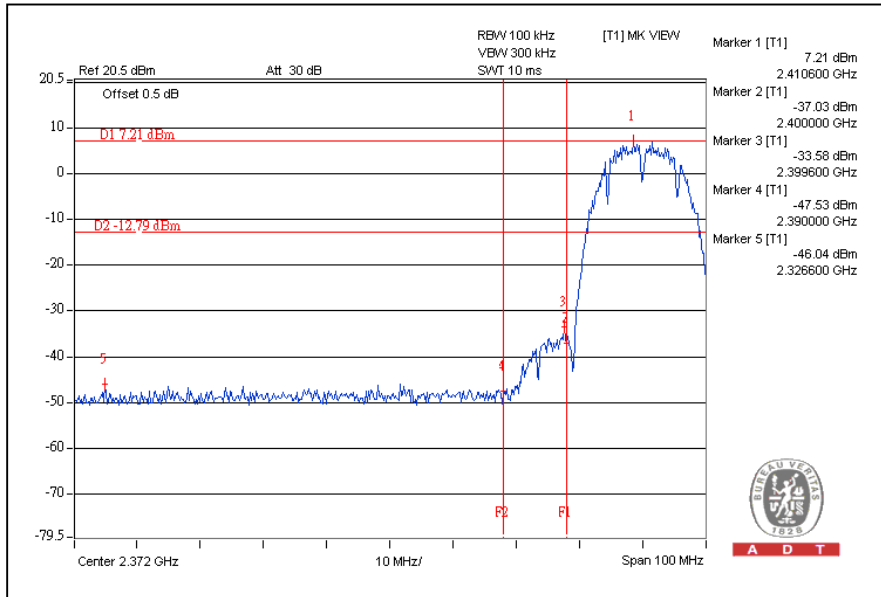


CH11

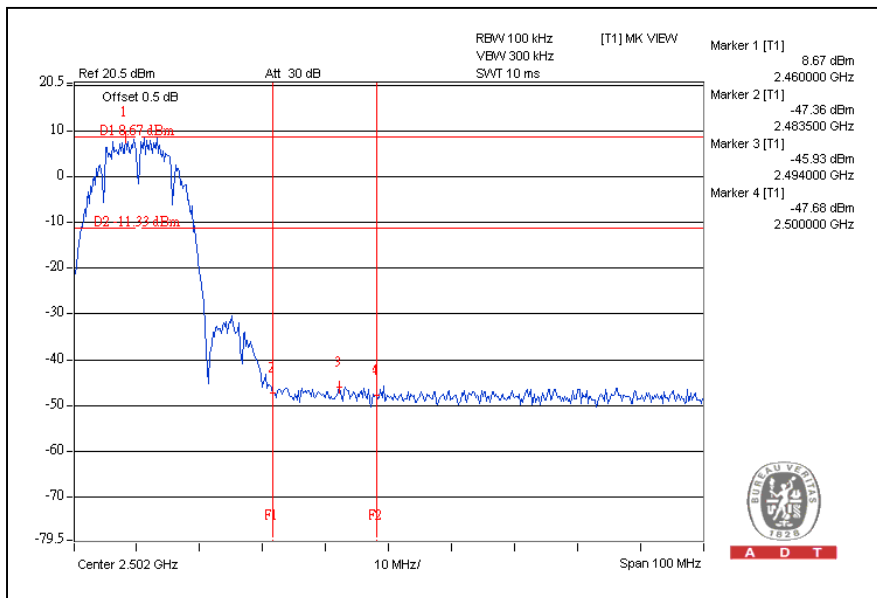




A D T

CH1

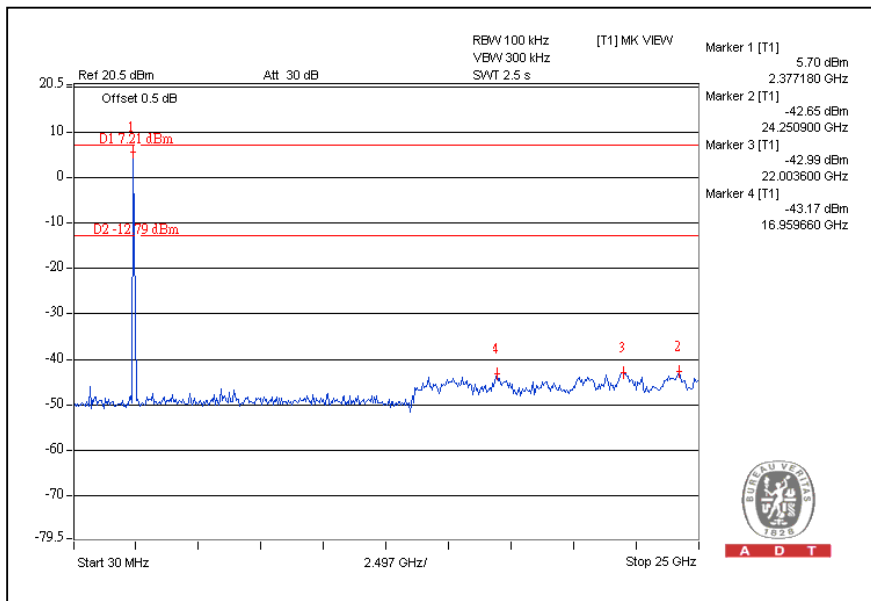


CH11

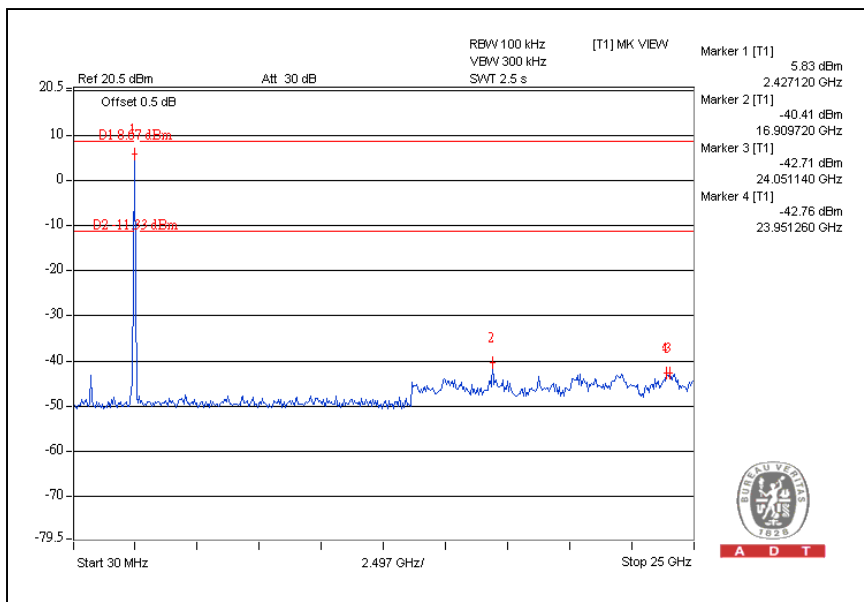


802.11g OFDM MODULATION:


CH 1

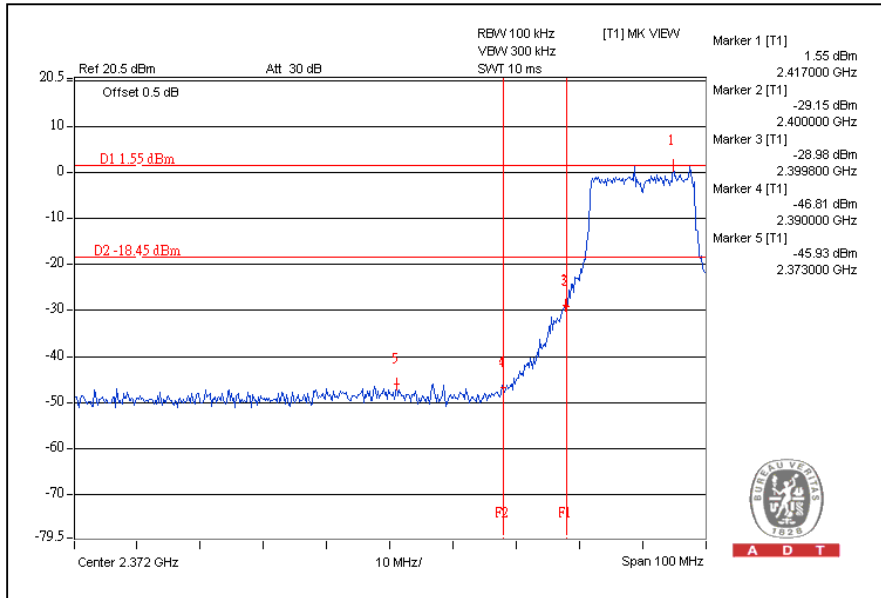


CH11

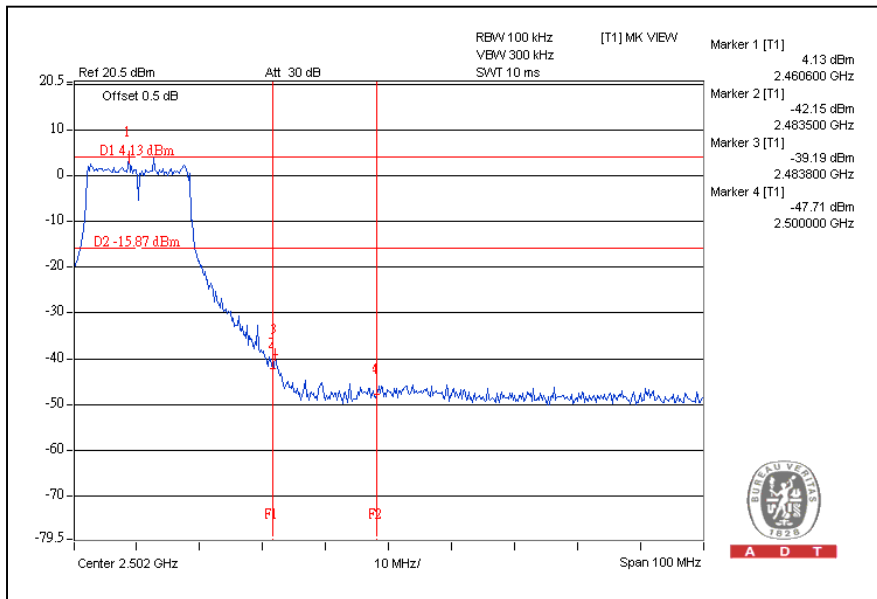

CH1

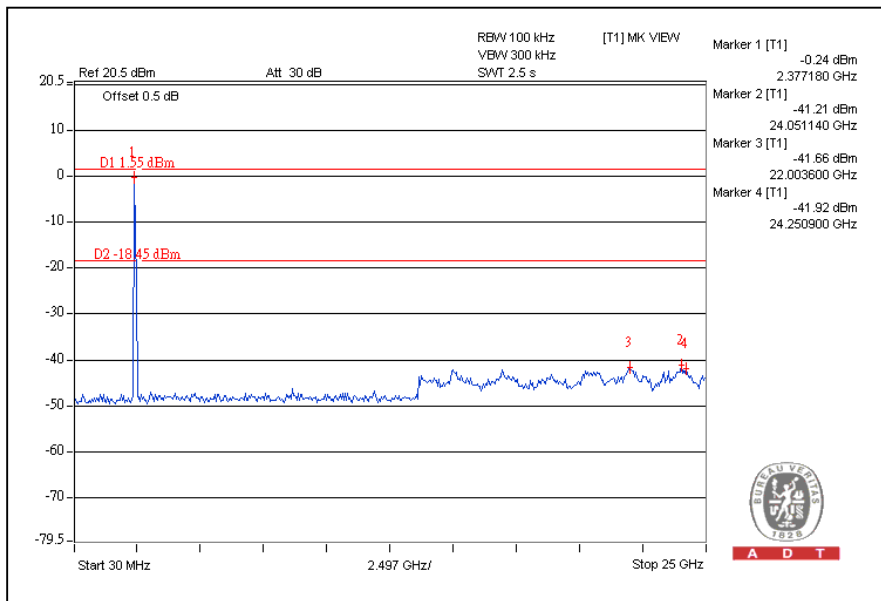


CH11

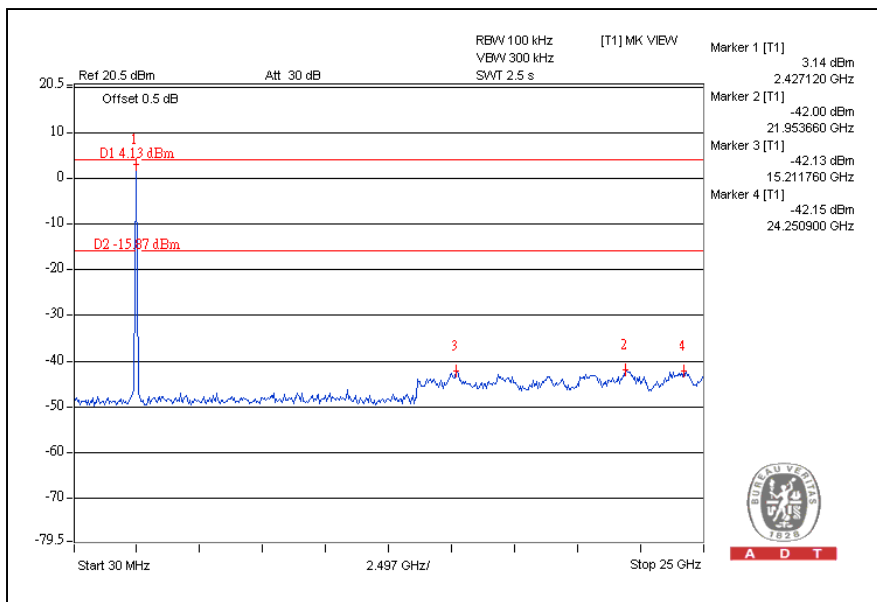




A D T


DRAFT 802.11n (20MHz) OFDM MODULATION: CH1

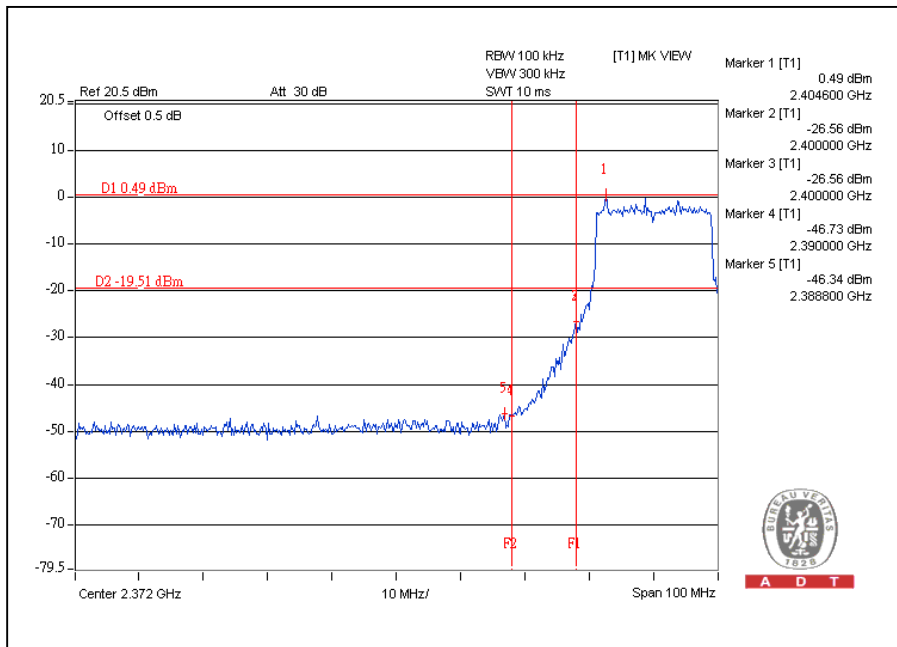


CH11

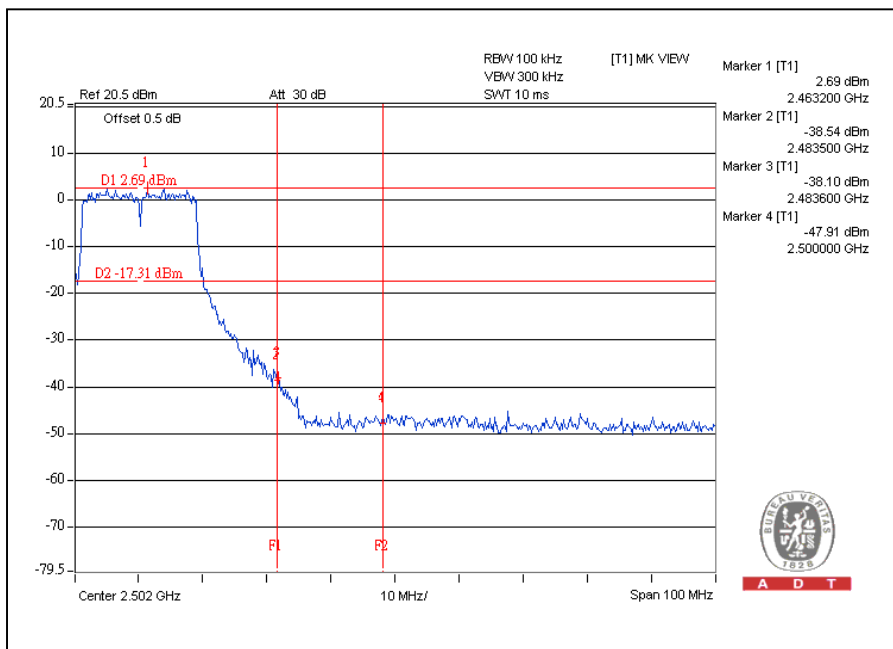

CH1

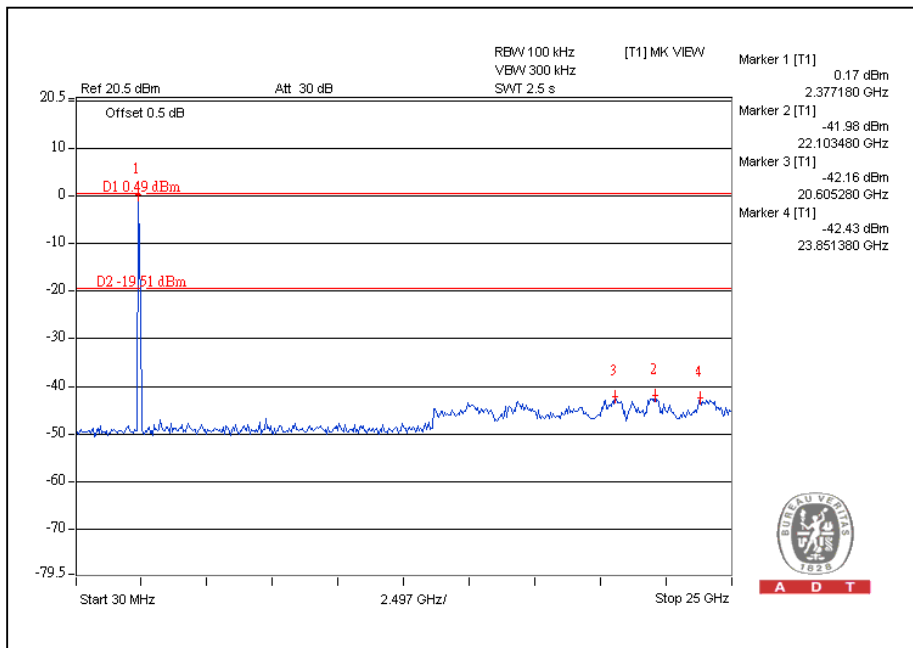

CH11

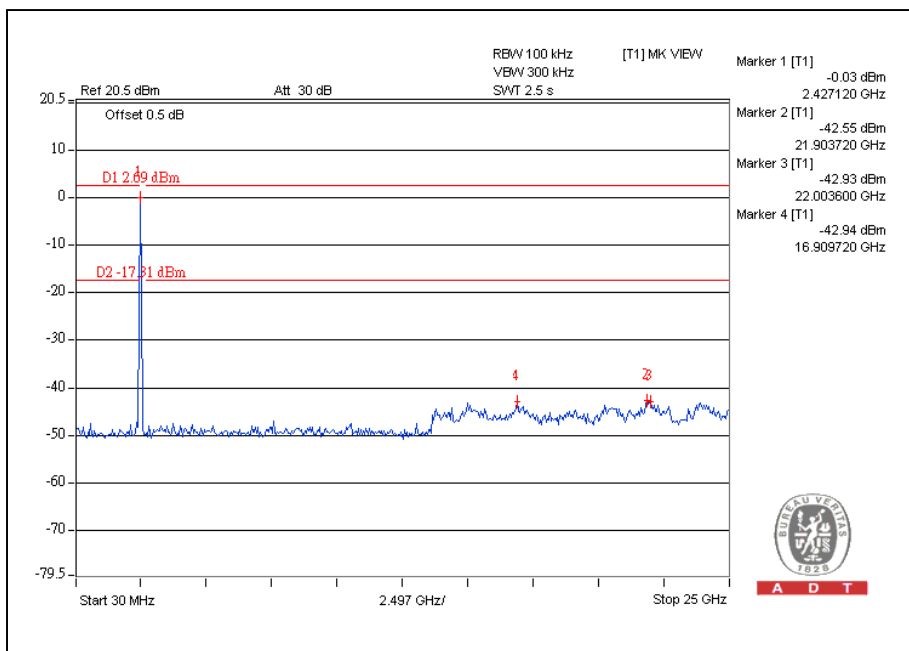





A D T

DRAFT 802.11n (40MHz) OFDM MODULATION:

CH1

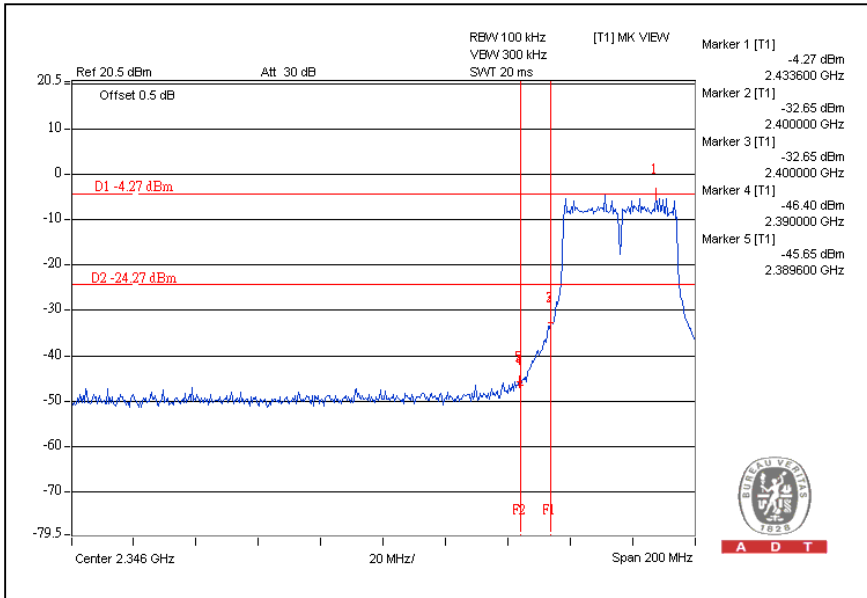


CH7

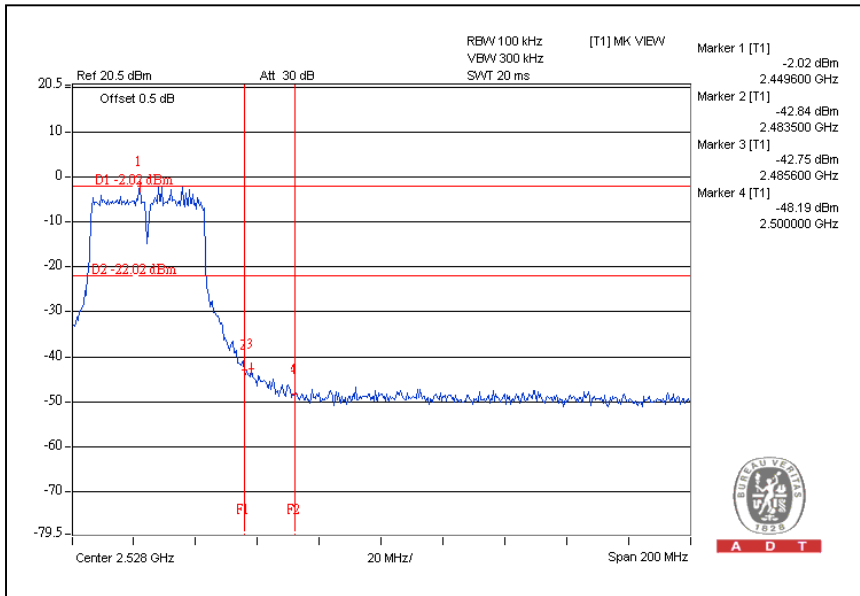




A D T

CH1

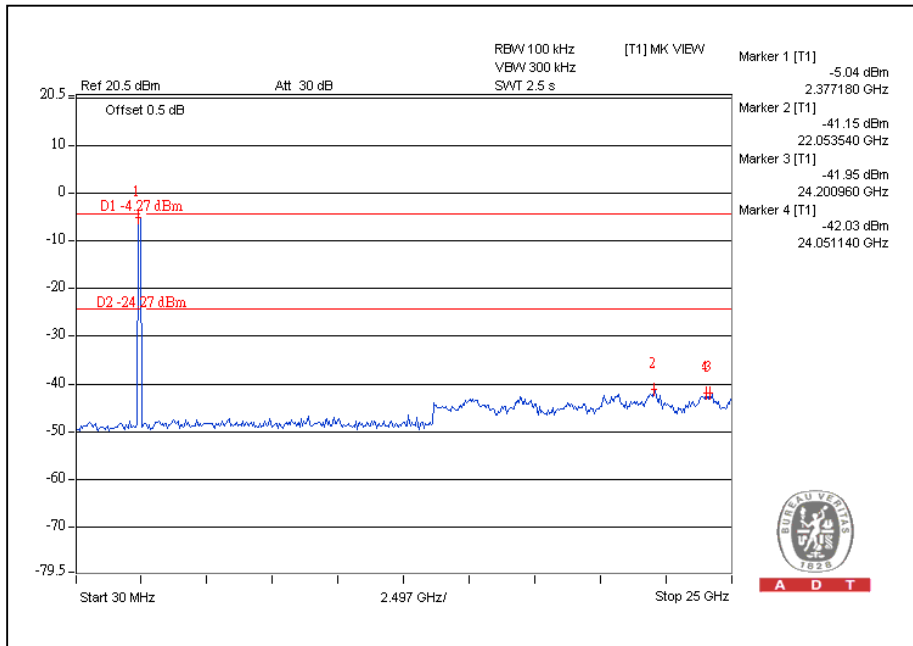

CH7

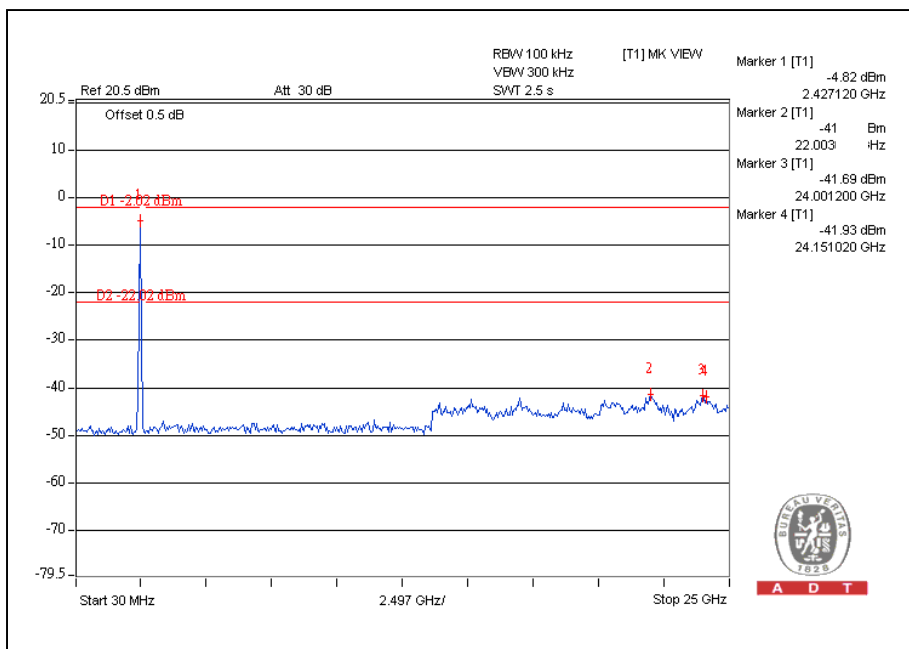

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is PIFA antenna without connector. The maximum Gain of the antenna is 2dBi.



A D T

5. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also



A D T

6.APPENDIX-A- MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---