



FCC TEST REPORT

REPORT NO.: RF951024H01

MODEL NO.: WRT330N

RECEIVED: Oct. 23, 2006

TESTED: Oct. 21 to 27, 2006

ISSUED: Nov. 02, 2006

APPLICANT: Cisco-Linksys LLC

ADDRESS: 121 Theory Drive Irvine, CA 92617(USA)

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien,
Taiwan, R.O.C.

This test report consists of 119 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



No. 2177-01



TABLE OF CONTENTS

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY.....	6
3.	GENERAL INFORMATION.....	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES.....	10
3.2.1	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	11
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	14
3.4	DESCRIPTION OF SUPPORT UNITS	15
3.5	CONFIGURATION OF SYSTEM UNDER TEST	16
4.	TEST TYPES AND RESULTS	17
4.1	CONDUCTED EMISSION MEASUREMENT	17
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	17
4.1.2	TEST INSTRUMENTS	17
4.1.3	TEST PROCEDURES	18
4.1.4	DEVIATION FROM TEST STANDARD	18
4.1.5	TEST SETUP	19
4.1.6	EUT OPERATING CONDITIONS	19
4.1.7	TEST RESULTS	20
4.2	RADIATED EMISSION MEASUREMENT	24
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	24
4.2.2	TEST INSTRUMENTS	25
4.2.3	TEST PROCEDURES	26
4.2.4	DEVIATION FROM TEST STANDARD	26
4.2.5	TEST SETUP	27
4.2.6	EUT OPERATING CONDITIONS	27
4.2.7	TEST RESULTS	28
4.3	6dB BANDWIDTH MEASUREMENT.....	42
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	42
4.3.2	TEST INSTRUMENTS	42
4.3.3	TEST PROCEDURE	42
4.3.4	DEVIATION FROM TEST STANDARD	42
4.3.5	TEST SETUP	43
4.3.6	EUT OPERATING CONDITIONS	43




4.3.7	TEST RESULTS	44
4.4	MAXIMUM PEAK OUTPUT POWER	68
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	68
4.4.2	INSTRUMENTS.....	68
4.4.3	TEST PROCEDURES	68
4.4.4	DEVIATION FROM TEST STANDARD	68
4.4.5	TEST SETUP	69
4.4.6	EUT OPERATING CONDITIONS	69
4.4.7	TEST RESULTS	70
4.5	POWER SPECTRAL DENSITY MEASUREMENT	72
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	72
4.5.2	TEST INSTRUMENTS	72
4.5.3	TEST PROCEDURE	72
4.5.4	DEVIATION FROM TEST STANDARD	72
4.5.5	TEST SETUP	73
4.5.6	EUT OPERATING CONDITION	73
4.5.7	TEST RESULTS	74
4.6	BAND EDGES MEASUREMENT	98
4.6.1	LIMITS OF BAND EDGES MEASUREMENT.....	98
4.6.2	TEST INSTRUMENTS	98
4.6.3	TEST PROCEDURE	98
4.6.4	EUT OPERATING CONDITION	98
4.6.5	TEST RESULTS	99
4.7	ANTENNA REQUIREMENT	115
4.7.1	STANDARD APPLICABLE	115
4.7.2	ANTENNA CONNECTED CONSTRUCTION	115
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	116
6.	INFORMATION ON THE TESTING LABORATORIES.....	118
	APPENDIX-A.....	A-1




1. CERTIFICATION

PRODUCT : Wireless-N Gigabit Gaming Router
MODEL NO.: WRT330N
BRAND: Linksys
APPLICANT : Cisco-Linksys LLC
TESTED: Oct. 21 to 27, 2006
TEST SAMPLE: ENGINEERING SAMPLE
STANDARDS : FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment (Model: WRT330N) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , **DATE:** Nov. 02, 2006
(Midoli Peng)

TECHNICAL ACCEPTANCE :  , **DATE:** Nov. 02, 2006
Responsible for RF (Hank Chung)

APPROVED BY :  , **DATE:** Nov. 02, 2006
(May Chen, Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -0.07dB at 0.166MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit : min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -0.80dB at 2390.00 & 2483.50MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.26 dB
Radiated emissions	30MHz ~ 200MHz	3.59 dB
	200MHz ~1000MHz	3.61 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless-N Gigabit Gaming Router
MODEL NO.	WRT330N
FCC ID	Q87-WRT330N
POWER SUPPLY	DC 12V from power adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/ 5.5/ 2/ 1Mbps 802.11g: 54/ 48/ 36/ 24/ 18/ 12/ 9/ 6Mbps Draft 802.11n (20MHz): 130/117/104/78/52/39/26/13Mbps Draft 802.11n (40MHz): 300/270/ 243/ 216/ 162/108/81/54/27Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11 for 802.11b, 802.11g, draft 802.11n (20MHz) 7 for draft 802.11n (40MHz)
MAXIMUM OUTPUT POWER	802.11b: 189.287mW 802.11g: 119.432mW draft 802.11n (20MHz): 75.357mW draft 802.11n (40MHz): 75.357mW
ANTENNA TYPE	Please see note 8 (on next page)
DATA CABLE	NA
I/O PORTS	WAN Port x 1, LAN Port x 4

NOTE:

1. The EUT incorporates a MIMO function with 802.11b, 802.11g, draft 802.11n. Physically, the card provides three completed transmit and three receivers.
2. The EUT is 3 * 3 spatial MIMO without beam forming function. The antenna configuration are three transmitter antennas and three receiver antennas , as there are 2 dipole antennas and one PCB monopole antenna. Spatial multiplexing modes for simultaneous transmission using 3 antennas , and for simultaneous receiver using 3 antennas.

3. The tests were performed under the following test modes for two different axes placements, and its data were recorded in this report:

Test Mode	Description
Mode A	Level mode
Mode B	Upright mode

From the above modes, the worst emission level was found in Mode A. Therefore only the test data of the modes were recorded in this report individually.

4. The EUT complies with draft 802.11n standards and backwards compatible with 802.11b, 802.11g products.
5. The EUT operates in the 2.4GHz frequency spectrum with data rate up to 300Mbps.
6. The EUT must be supplied with a power adapter and following different models could be chosen:

Adapter 1:	
Brand:	Linksys
Model No.:	LS120V10A
Input power :	AC100V-240V, 0.5A, 60Hz cable length: 0.5m/unshielded/without core
Output power :	12VDC, 1.0A cable length: 1.8m/unshielded/without core
Adapter 2:	
Brand:	Linksys
Model No.:	LS120V10AE
Input power :	AC100V-240V, 0.5A, 60Hz cable length: 0.5m/unshielded/without core
Output power :	12VDC, 1.0A cable length: 1.8m/unshielded/without core

7. There are three antennas provided to this EUT, please refer to the following table:

No.	Antenna Type	Gain (dBi)	Cable loss(dB)	Net Gain (dBi)	Antenna Connector
1	Dipole	1.8	0.9	0.9	HRS Connector
2	PCB	1.8	0.8	1.0	HRS Connector
3	Dipole	1.8	0.9	0.9	HRS Connector

8. For conducted and radiated test (Below 1 GHz), the EUT was pre-tested under following test mode, and the test data was recorded in this report:

Pre-test Mode	Description
Mode A	802.11b
Mode B	802.11g
Mode C	Draft 802.11n (20MHz)
Mode D	Draft 802.11n (40MHz)

The worst emission level was found in mode D. The final test was executed under test mode with highest emission and recorded in this report individually.

9. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided for 802.11b, 802.11g, draft 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Seven channels are provided for draft 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2422MHz	5	2442MHz
2	2427MHz	6	2447MHz
3	2432MHz	7	2452MHz
4	2437MHz		

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

COMBINATION MODE:

COMBINATION MODE	OPERATION MODE	ANTENNA 1	ANTENNA 2	ANTENNA 3
A	802.11 b	✓		✓
B		✓	✓	✓
C	802.11g	✓		✓
D		✓	✓	✓
E	DRAFT 802.11n(20MHz)	✓		✓
F		✓	✓	✓
G	DRAFT 802.11n(40MHz)	✓		✓
H		✓	✓	✓

Note:

1. The above information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.
2. Antenna 1 and Antenna 3 are Dipole, Antenna 2 is PCB.
3. From above mode, the different modes was chosen for final test and its data were recorded in this report.
4. All of the modes are different operation mode or antenna combination, we choose the worst mode (decided by pretest) for final test. Mode B, D, F, H, the worst modes, was selected as representative mode for the test.

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	
-	✓	✓	✓	✓	-

Where **PLC**: Power Line Conducted Emission

RE < 1G: Radiated Emission below 1GHz

RE ≥ 1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX COMBINATION
Draft 802.11n (40MHz)	1 to 7	7	OFDM	BPSK	13.5	H

- The EUT was tested with the following modes:

Test Mode	Description
Mode 1	Draft 802.11n (40MHz): with adapter 1
Mode 2	Draft 802.11n (40MHz): with adapter 2

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX COMBINATION
Draft 802.11n (40MHz)	1 to 7	7	OFDM	BPSK	13.5	H

- The EUT was tested with the following modes:

Test Mode	Description
Mode 1	Draft 802.11n (40MHz): with adapter 1
Mode 2	Draft 802.11n (40MHz): with adapter 2

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX COMBINATION
802.11b	1 to 11	1, 6, 11	DSSS	CCK	1	B
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	D
Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5	F
Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5	H

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX COMBINATION
802.11b	1 to 11	1, 11	DSSS	CCK	1	B
802.11g	1 to 11	1, 11	OFDM	BPSK	6	D
Draft 802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	6.5	F
Draft 802.11n (40MHz)	1 to 7	1, 7	OFDM	BPSK	13.5	H

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX COMBINATION
802.11b	1 to 11	1, 6, 11	DSSS	CCK	1	B
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	D
Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5	F
Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5	H



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	Dell	PP01L	TW-0791UH-12800-0CK-3735	DoC
2	NOTEBOOK COMPUTER	Dell	PP01L	TW-09c748-12800-165-3171	DoC
3	NOTEBOOK COMPUTER	DELL	PP18L	6976685584	DoC
4	Switch HUB	AVSYS	110H8	01-20E-000002	DoC

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA
3	NA
4	NA

NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

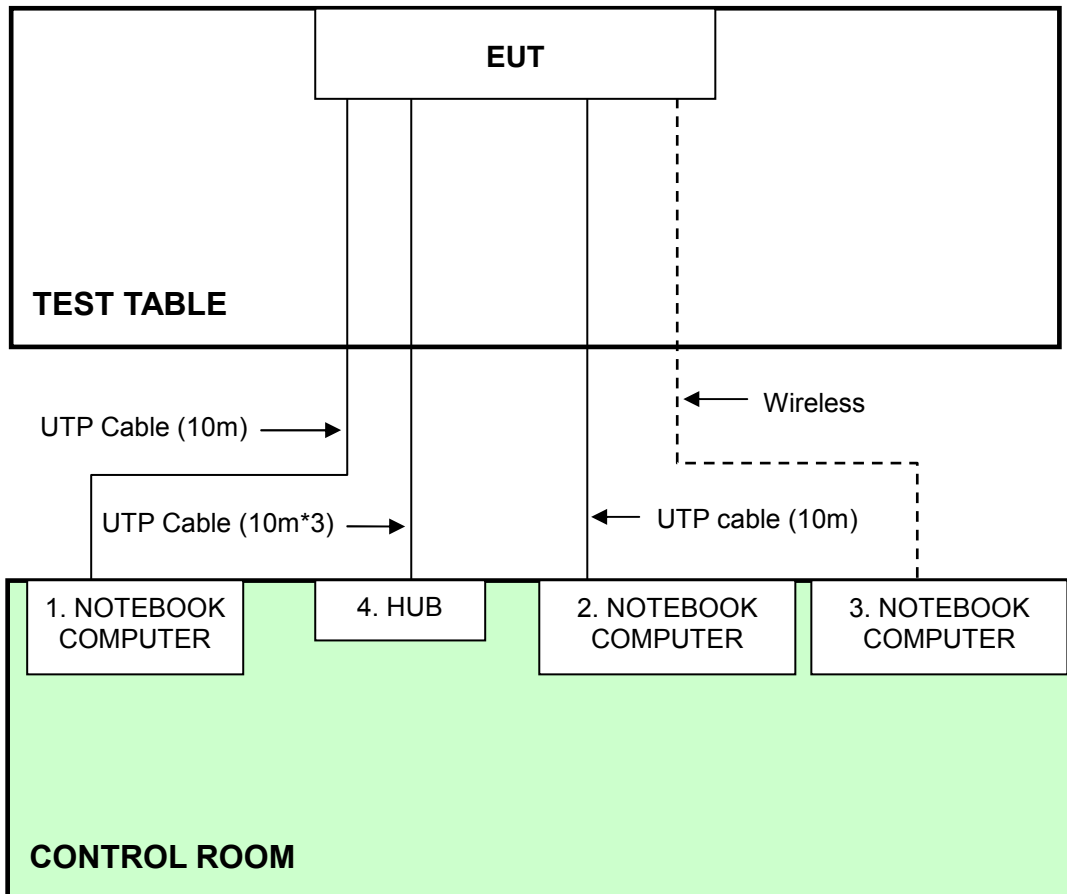

- NOTE:**
1. Support unit 1-4 were kept in the control room during the test.
 2. Please refer to the photos of test configuration in Item 5 also.

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver	ESCS 30	847124/029	Dec. 15, 2006
Line-Impedance Stabilization Network(for EUT)	ENV-216	100071	Nov. 10, 2006
Line-Impedance Stabilization Network(for Peripheral)	KNW-407	8/1395/12	Jul. 18, 2007
RF Cable (JETBAO)	RG233/U	Cable_CB_01	Dec. 09, 2006
Terminator	50	2	Oct. 19, 2007
Software	ADT_Cond_V7.3.2	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in ADT Shielded Room No. B.
 3. The VCCI Con B Registration No. is C-2193.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

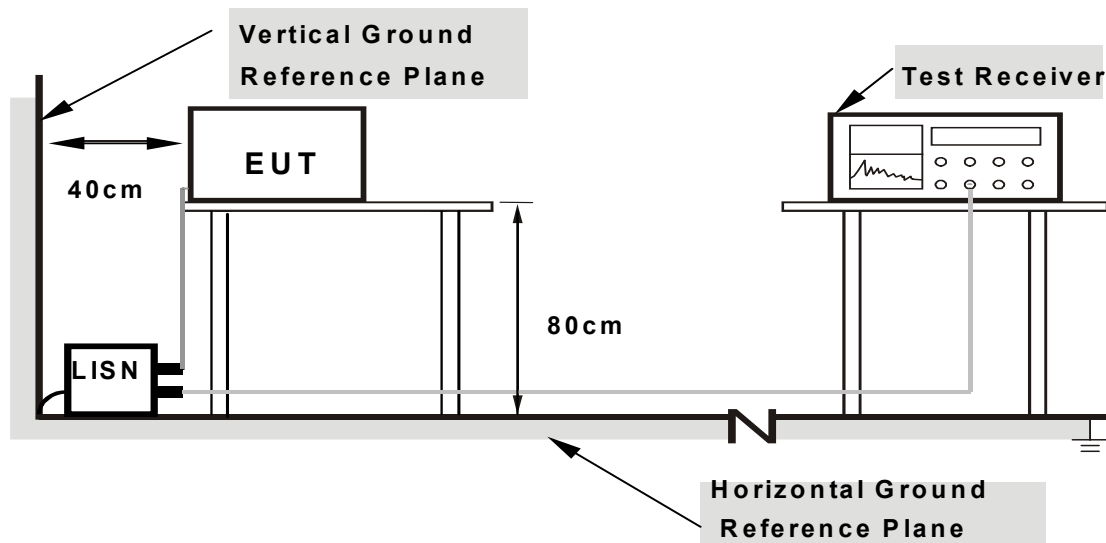

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on testing table.
- b. Prepared other computer systems (support unit 1 ~ 3) to act as communication partners and placed them outside of testing area.
- c. The communication partners run test program “Ping Test & BCM MFGTEST” to enable EUT under transmission/receiving condition continuously at specific channel frequency via UTP cable and wireless transmission.


4.1.7 TEST RESULTS

DRAFT 802.11n (40MHz) OFDM MODULATION: (MODE 1)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	PHASE	Line (L)
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	13.5Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	27deg. C, 60%RH, 971hPa	TESTED BY	Wen Yu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.161	9.60	52.18	32.70	61.78	42.30	65.41
2	0.326	9.60	33.15	-	42.75	-	59.54	49.54	-16.79	-
3	1.037	9.60	32.95	-	42.55	-	56.00	46.00	-13.45	-
4	1.931	9.69	33.59	-	43.28	-	56.00	46.00	-12.72	-
5	2.253	9.70	34.69	-	44.39	-	56.00	46.00	-11.61	-
6	2.517	9.70	34.01	-	43.71	-	56.00	46.00	-12.29	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

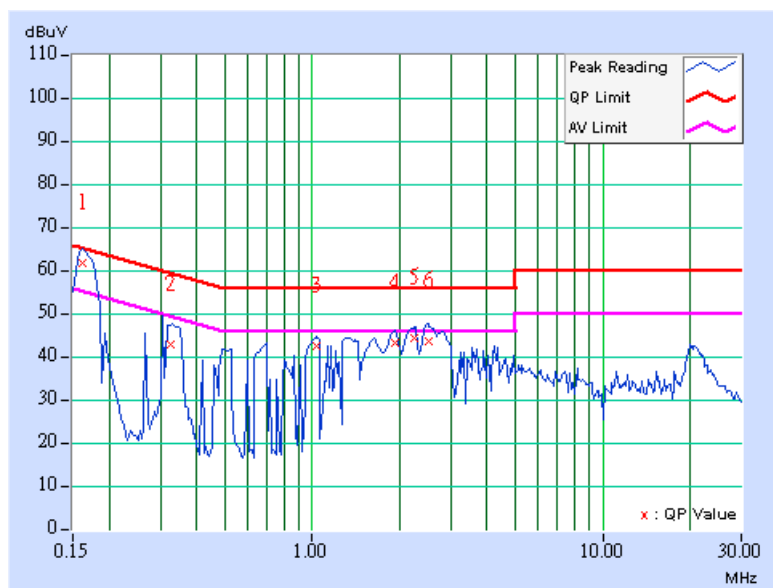

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	PHASE	Neutral (N)
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	13.5Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	27deg. C, 60%RH, 971hPa	TESTED BY	Wen Yu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.166	9.60	55.31	45.46	64.91	55.06	65.13
2	0.342	9.60	36.04	-	45.64	-	59.15	49.15	-13.51	-
3	1.916	9.69	32.90	-	42.59	-	56.00	46.00	-13.41	-
4	2.255	9.70	33.60	-	43.30	-	56.00	46.00	-12.70	-
5	2.478	9.70	32.97	-	42.67	-	56.00	46.00	-13.33	-
6	20.637	10.10	28.79	-	38.89	-	60.00	50.00	-21.11	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

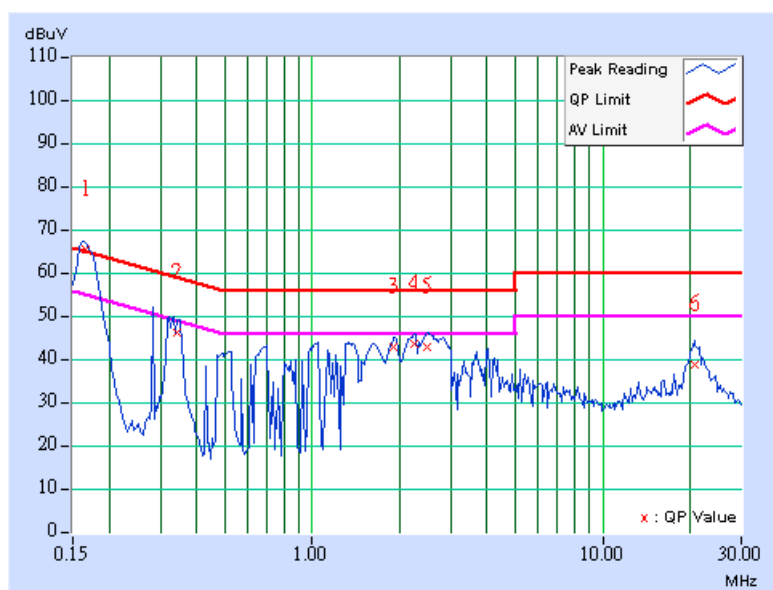


DRAFT 802.11n (40MHz) OFDM MODULATION: (MODE 2)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	PHASE	Line (L)
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	13.5Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	27deg. C, 60%RH, 971hPa	TESTED BY	Wen Yu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.193	9.60	35.90	-	45.50	-	63.91	53.91	-18.41
2	0.451	9.60	30.75	-	40.35	-	56.86	46.86	-16.51	-
3	0.709	9.60	28.86	-	38.46	-	56.00	46.00	-17.54	-
4	0.966	9.60	28.57	-	38.17	-	56.00	46.00	-17.83	-
5	1.548	9.65	28.90	-	38.55	-	56.00	46.00	-17.45	-
6	25.045	10.10	30.67	-	40.77	-	60.00	50.00	-19.23	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

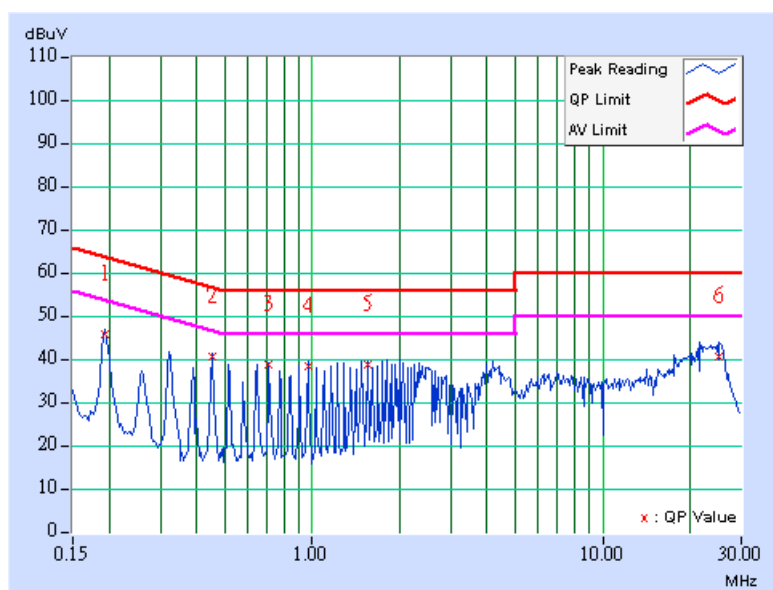

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	PHASE	Neutral (N)
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	13.5Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	27deg. C, 60%RH, 971hPa	TESTED BY	Wen Yu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.193	9.60	36.28	-	45.88	-	63.91
2	0.451	9.60	31.88	-	41.48	-	56.86	46.86	-15.38	-
3	0.517	9.60	31.41	-	41.01	-	56.00	46.00	-14.99	-
4	1.228	9.62	30.56	-	40.18	-	56.00	46.00	-15.82	-
5	1.615	9.66	30.69	-	40.35	-	56.00	46.00	-15.65	-
6	24.531	10.10	30.67	-	40.77	-	60.00	50.00	-19.23	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

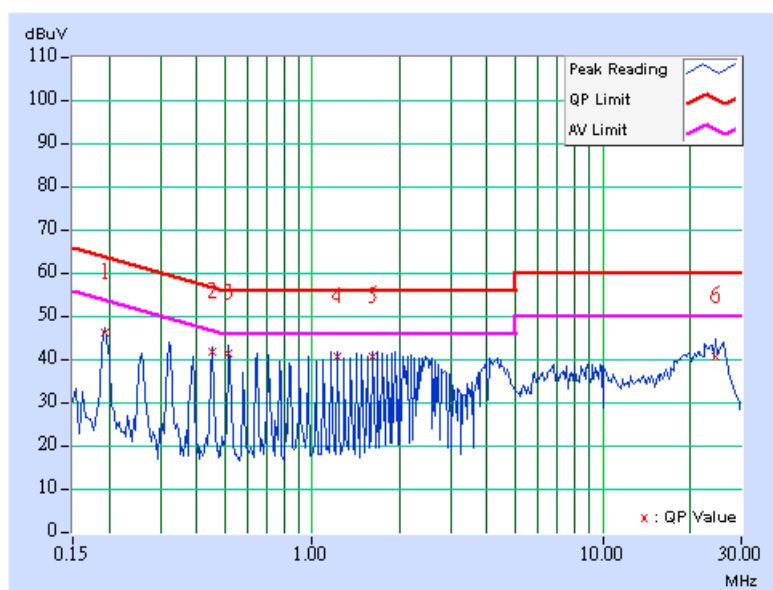

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400 / F(kHz)	300
0.490 ~ 1.705	24000 / F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ADVANTEST Spectrum Analyzer	R3271A	85060311	July 03, 2007
HP Pre_Amplifier	8449B	3008A01922	Sep. 18, 2007
ROHDE & SCHWARZ Test Receiver	ESCS30	100375	Sep. 20, 2007
CHASE Broadband Antenna	VULB9168	138	Dec. 11, 2006
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 27, 2006
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 05, 2007
SCHWARZBECK Biconical Antenna	VHBA9123	459	Jun. 08, 2009
SCHWARZBECK Periodic Antenna	UPA6108	1148	Jun. 08, 2009
R&S Loop Antenna	HFH2-Z2	881058/15	Nov. 29, 2007
RF Switches (ARNITSU)	CS-201	1565157	NA
RF CABLE (Chaintek)	SF102	22054-2	Nov. 16. 2006
RF Cable(RICHTEC)	9913-30M N-N Cable	STCCAB-30M-1 GHz	Jul. 15, 2007
Software	ADT_Radiated_V 5.14	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

- Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Biconical and Periodic Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, HP preamplifier (model: 8449B) and Spectrum Analyzer (model: R3271A) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in ADT Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 4824A-3.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

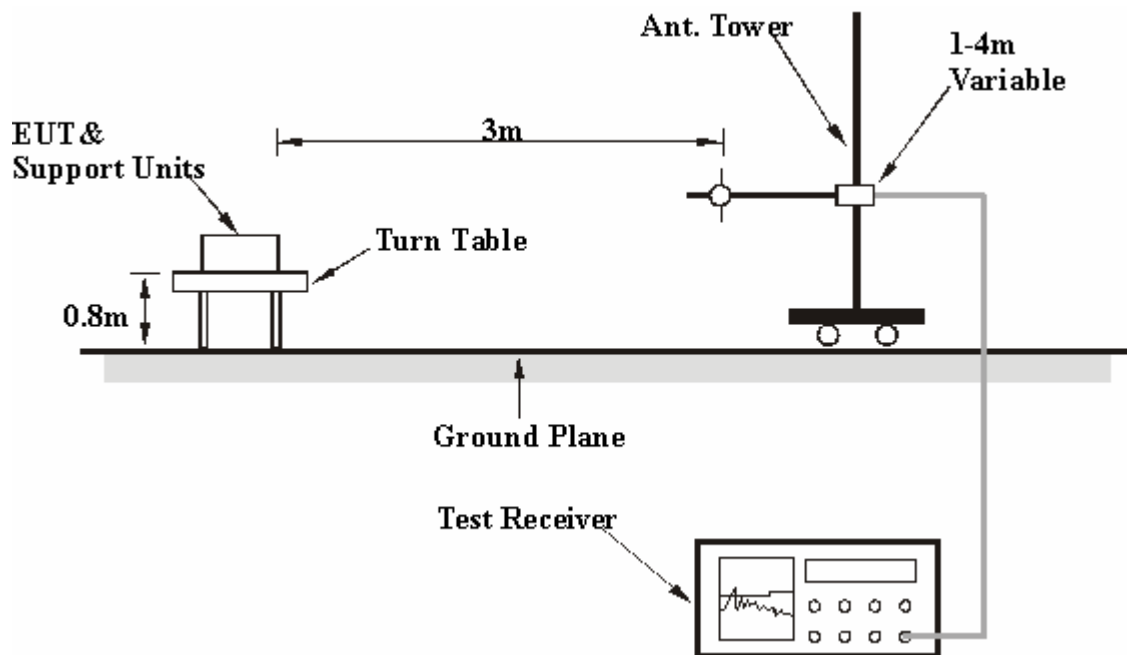

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as item 4.1.6

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA: (MODE 1)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK for draft 802.11n (40MHz)	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	13.5Mbps	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	30deg. C, 56%RH, 971hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	125.00	41.60 QP	43.50	-1.90	2.47 H	297	29.40	12.20
2	250.06	32.40 QP	46.00	-13.60	1.35 H	308	18.60	13.80
3	375.09	38.60 QP	46.00	-7.40	1.00 H	334	20.40	18.20
4	400.01	33.70 QP	46.00	-12.30	2.39 H	21	14.70	19.00
5	500.00	39.70 QP	46.00	-6.30	1.70 H	347	17.90	21.80
6	600.00	40.80 QP	46.00	-5.20	1.38 H	350	16.30	24.50
7	625.15	36.20 QP	46.00	-9.80	1.40 H	37	11.50	24.80
8	750.18	41.80 QP	46.00	-4.20	1.00 H	342	14.50	27.40
9	800.02	41.00 QP	46.00	-5.00	1.00 H	30	13.50	27.60
10	875.20	44.90 QP	46.00	-1.10	1.00 H	64	16.30	28.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	50.00	38.90 QP	40.00	-1.10	1.00 V	63	23.80	15.10
2	125.00	41.60 QP	43.50	-1.90	1.00 V	334	29.40	12.20
3	375.09	40.30 QP	46.00	-5.70	1.00 V	0	22.10	18.20
4	400.01	35.40 QP	46.00	-10.60	1.12 V	354	16.40	19.00
5	500.12	42.40 QP	46.00	-3.60	1.00 V	148	20.60	21.80
6	600.01	37.60 QP	46.00	-8.40	1.00 V	209	13.10	24.50
7	625.14	42.00 QP	46.00	-4.00	1.01 V	86	17.20	24.80
8	750.18	42.70 QP	46.00	-3.30	1.42 V	257	15.30	27.40
9	800.02	38.00 QP	46.00	-8.00	1.20 V	98	10.40	27.60
10	875.20	40.70 QP	46.00	-5.30	1.53 V	43	12.10	28.60

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

BELOW 1GHz WORST-CASE DATA: (MODE 2)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK for draft 802.11n (40MHz)	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	13.5Mbps	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	30deg. C, 56%RH, 971hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	125.00	35.90 QP	43.50	-7.60	2.49 H	291	23.70	12.20
2	375.09	35.70 QP	46.00	-10.30	2.99 H	333	17.50	18.20
3	400.00	35.50 QP	46.00	-10.50	2.29 H	356	16.50	19.00
4	499.99	40.60 QP	46.00	-5.40	1.61 H	349	18.80	21.80
5	600.00	39.60 QP	46.00	-6.40	1.39 H	320	15.10	24.50
6	625.14	45.00 QP	46.00	-1.00	1.30 H	48	20.30	24.80
7	750.17	43.60 QP	46.00	-2.40	2.34 H	2	16.20	27.40
8	800.02	41.50 QP	46.00	-4.50	1.00 H	28	13.90	27.60
9	875.20	41.60 QP	46.00	-4.40	1.00 H	34	12.90	28.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	50.00	39.00 QP	40.00	-1.00	1.00 V	21	23.90	15.10
2	125.00	37.00 QP	43.50	-6.50	1.00 V	188	24.80	12.20
3	375.09	38.60 QP	46.00	-7.40	1.00 V	11	20.40	18.20
4	400.00	36.30 QP	46.00	-9.70	1.00 V	15	17.20	19.00
5	449.99	34.50 QP	46.00	-11.50	1.00 V	314	14.00	20.50
6	500.00	39.40 QP	46.00	-6.60	1.00 V	223	17.60	21.80
7	600.00	38.20 QP	46.00	-7.80	1.00 V	208	13.70	24.50
8	625.14	39.00 QP	46.00	-7.00	1.34 V	3	14.30	24.80
9	750.17	43.80 QP	46.00	-2.20	1.60 V	21	16.40	27.40
10	800.02	40.40 QP	46.00	-5.60	1.35 V	223	12.90	27.60
11	875.21	37.70 QP	46.00	-8.30	1.47 V	2	9.10	28.60

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

802.11b DSSS MODULATION:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	CCK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	1Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 66%RH, 971hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	50.23 PK	74.00	-23.77	1.08 H	25	51.99	-1.76
1	2390.00	42.19 AV	54.00	-11.81	1.08 H	25	43.95	-1.76
2	*2412.00	103.49 PK			1.02 H	252	105.33	-1.84
2	*2412.00	99.02 AV			1.02 H	252	100.86	-1.84
3	3216.00	42.35 PK	74.00	-31.65	1.05 H	345	41.52	0.83
3	3216.00	31.02 AV	54.00	-22.98	1.05 H	345	30.19	0.83
4	4824.00	47.65 PK	74.00	-26.35	1.44 H	62	43.19	4.46
4	4824.00	42.82 AV	54.00	-11.18	1.44 H	62	38.36	4.46
5	7236.00	54.12 PK	74.00	-19.88	1.08 H	345	45.44	8.68
5	7236.00	46.10 AV	54.00	-7.90	1.08 H	345	37.42	8.68

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.00	61.40 PK	74.00	-12.60	1.09 V	185	63.30	-1.90
1	2386.00	53.00 AV	54.00	-1.00	1.09 V	185	54.90	-1.90
2	*2412.00	116.30 PK			1.05 V	84	118.20	-1.90
2	*2412.00	112.40 AV			1.05 V	84	114.30	-1.90
3	3216.00	43.80 PK	74.00	-30.20	1.00 V	2	43.40	0.50
3	3216.00	32.00 AV	54.00	-22.00	1.00 V	2	31.50	0.50
4	4824.00	50.00 PK	74.00	-24.00	1.00 V	32	46.10	3.90
4	4824.00	46.20 AV	54.00	-7.80	1.00 V	32	42.30	3.90
5	7236.00	57.40 PK	74.00	-16.60	1.15 V	320	48.80	8.60
5	7236.00	48.40 AV	54.00	-5.60	1.15 V	320	39.80	8.60

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	CCK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	1Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 66%RH, 971hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	105.97 PK			1.03 H	241	107.85	-1.88
1	*2437.00	101.59 AV			1.03 H	241	103.47	-1.88
2	3248.00	44.12 PK	74.00	-29.88	1.00 H	3	43.44	0.68
2	3248.00	32.08 AV	54.00	-21.92	1.00 H	3	31.40	0.68
3	4874.00	48.76 PK	74.00	-25.24	1.54 H	58	44.39	4.37
3	4874.00	43.98 AV	54.00	-10.02	1.54 H	58	39.61	4.37
4	7311.00	56.00 PK	74.00	-18.00	1.10 H	2	47.24	8.76
4	7311.00	47.20 AV	54.00	-6.80	1.10 H	2	38.44	8.76

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	119.60 PK			1.08 V	76	121.55	-1.95
1	*2437.00	115.20 AV			1.08 V	76	117.15	-1.95
2	3282.00	43.20 PK	74.00	-30.80	1.05 V	345	43.03	0.17
2	3282.00	31.00 AV	54.00	-23.00	1.05 V	345	30.83	0.17
3	4874.00	51.30 PK	74.00	-22.70	1.00 V	42	47.49	3.81
3	4874.00	47.20 AV	54.00	-6.80	1.00 V	42	43.39	3.81
4	7311.00	58.30 PK	74.00	-15.70	1.16 V	339	49.77	8.53
4	7311.00	49.60 AV	54.00	-4.40	1.16 V	339	41.07	8.53

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	CCK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	1Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 66%RH, 971hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.50 PK			1.05 H	250	105.42	-1.92
1	*2462.00	99.20 AV			1.05 H	250	101.12	-1.92
2	2483.50	50.10 PK	74.00	-23.90	1.05 H	12	52.05	-1.95
2	2483.50	42.10 AV	54.00	-11.90	1.05 H	12	44.05	-1.95
3	3282.00	42.10 PK	74.00	-31.90	1.05 H	335	41.58	0.52
3	3282.00	31.00 AV	54.00	-23.00	1.05 H	335	30.48	0.52
4	4924.00	47.90 PK	74.00	-26.10	1.35 H	52	43.43	4.47
4	4924.00	42.90 AV	54.00	-11.10	1.35 H	52	38.43	4.47
5	7386.00	54.30 PK	74.00	-19.70	1.05 H	312	45.41	8.89
5	7386.00	46.20 AV	54.00	-7.80	1.05 H	312	37.31	8.89

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	116.30 PK			1.08 V	78	118.26	-1.96
1	*2462.00	112.50 AV			1.08 V	78	114.46	-1.96
2	2488.00	61.80 PK	74.00	-12.20	1.04 V	175	63.78	-1.98
2	2488.00	52.40 AV	54.00	-1.60	1.04 V	175	54.38	-1.98
3	3282.00	43.90 PK	74.00	-30.10	1.00 V	12	43.73	0.17
3	3282.00	31.10 AV	54.00	-22.90	1.00 V	12	30.93	0.17
4	4924.00	50.30 PK	74.00	-23.70	1.00 V	28	46.45	3.85
4	4924.00	46.40 AV	54.00	-7.60	1.00 V	28	42.55	3.85
5	7386.00	57.50 PK	74.00	-16.50	1.09 V	302	48.94	8.56
5	7386.00	48.60 AV	54.00	-5.40	1.09 V	302	40.04	8.56

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.

802.11g OFDM MODULATION:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	6Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 66%RH, 971hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.00 PK	74.00	-14.00	1.08 H	3	61.76	-1.76
1	2390.00	42.80 AV	54.00	-11.20	1.08 H	3	44.56	-1.76
2	*2412.00	102.10 PK			1.08 H	215	103.94	-1.84
2	*2412.00	92.30 AV			1.08 H	215	94.14	-1.84
3	3216.00	44.30 PK	74.00	-29.70	1.18 H	315	43.47	0.83
3	3216.00	32.20 AV	54.00	-21.80	1.18 H	315	31.37	0.83
4	4824.00	49.30 PK	74.00	-24.70	1.05 H	260	44.84	4.46
4	4824.00	35.10 AV	54.00	-18.90	1.05 H	260	30.64	4.46

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.10 PK	74.00	-4.90	1.10 V	5	70.99	-1.89
1	2390.00	51.90 AV	54.00	-2.10	1.10 V	5	53.79	-1.89
2	*2412.00	115.60 PK			1.11 V	69	117.53	-1.93
2	*2412.00	105.60 AV			1.11 V	69	107.53	-1.93
3	3216.00	44.90 PK	74.00	-29.10	1.03 V	2	44.45	0.45
3	3216.00	32.70 AV	54.00	-21.30	1.03 V	2	32.25	0.45
4	4824.00	51.20 PK	74.00	-22.80	1.26 V	26	47.27	3.93
4	4824.00	40.90 AV	54.00	-13.10	1.26 V	26	36.97	3.93

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	6Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 66%RH, 971hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.20 PK			1.00 H	210	105.08	-1.88
1	*2437.00	93.20 AV			1.00 H	210	95.08	-1.88
2	3248.00	44.10 PK	74.00	-29.90	1.05 H	8	43.42	0.68
2	3248.00	32.10 AV	54.00	-21.90	1.05 H	8	31.42	0.68
3	4874.00	49.60 PK	74.00	-24.40	1.25 H	255	45.23	4.37
3	4874.00	35.30 AV	54.00	-18.70	1.25 H	255	30.93	4.37

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	117.40 PK			1.07 V	78	119.35	-1.95
1	*2437.00	107.00 AV			1.07 V	78	108.95	-1.95
2	3248.00	45.00 PK	74.00	-29.00	1.05 V	20	44.69	0.31
2	3248.00	32.90 AV	54.00	-21.10	1.05 V	20	32.59	0.31
3	4874.00	50.80 PK	74.00	-23.20	1.35 V	48	46.99	3.81
3	4874.00	40.60 AV	54.00	-13.40	1.35 V	48	36.79	3.81

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	6Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 66%RH, 971hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.20 PK			1.05 H	220	104.12	-1.92
1	*2462.00	92.40 AV			1.05 H	220	94.32	-1.92
2	2483.50	60.40 PK	74.00	-13.60	1.07 H	8	62.35	-1.95
2	2483.50	43.00 AV	54.00	-11.00	1.07 H	8	44.95	-1.95
3	3282.00	44.30 PK	74.00	-29.70	1.20 H	325	43.78	0.52
3	3282.00	32.20 AV	54.00	-21.80	1.20 H	325	31.68	0.52
4	4924.00	49.30 PK	74.00	-24.70	1.10 H	265	44.83	4.47
4	4924.00	35.10 AV	54.00	-18.90	1.10 H	265	30.63	4.47

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	116.00 PK			1.08 V	82	117.96	-1.96
1	*2462.00	105.80 AV			1.08 V	82	107.76	-1.96
2	2483.50	70.20 PK	74.00	-3.80	1.08 V	165	72.18	-1.98
2	2483.50	53.10 AV	54.00	-0.90	1.08 V	165	55.08	-1.98
3	3282.00	44.30 PK	74.00	-29.70	1.05 V	3	44.13	0.17
3	3282.00	32.20 AV	54.00	-21.80	1.05 V	3	32.03	0.17
4	4924.00	50.90 PK	74.00	-23.10	1.30 V	35	47.05	3.85
4	4924.00	40.70 AV	54.00	-13.30	1.30 V	35	36.85	3.85

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.

DRAFT 802.11n (20MHz) OFDM MODULATION:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	6.5Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 66%RH, 971hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.50 PK	74.00	-13.50	1.05 H	2	62.26	-1.76
1	2390.00	43.30 AV	54.00	-10.70	1.05 H	2	45.06	-1.76
2	*2412.00	102.00 PK			1.08 H	66	103.84	-1.84
2	*2412.00	92.10 AV			1.08 H	66	93.94	-1.84
3	3216.00	44.10 PK	74.00	-29.90	1.08 H	320	43.27	0.83
3	3216.00	32.10 AV	54.00	-21.90	1.08 H	320	31.27	0.83
4	4824.00	49.10 PK	74.00	-24.90	1.06 H	275	44.64	4.46
4	4824.00	35.00 AV	54.00	-19.00	1.06 H	275	30.54	4.46

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.10 PK	74.00	-3.90	1.08 V	6	71.99	-1.89
1	2390.00	53.00 AV	54.00	-1.00	1.08 V	6	54.89	-1.89
2	*2412.00	115.20 PK			1.08 V	65	117.13	-1.93
2	*2412.00	104.80 AV			1.08 V	65	106.73	-1.93
3	3216.00	45.00 PK	74.00	-29.00	1.03 V	330	44.55	0.45
3	3216.00	32.90 AV	54.00	-21.10	1.03 V	330	32.45	0.45
4	4824.00	51.10 PK	74.00	-22.90	1.20 V	35	47.17	3.93
4	4824.00	40.10 AV	54.00	-13.90	1.20 V	35	36.17	3.93

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	6.5Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 66%RH, 971hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.10 PK			1.03 H	215	103.98	-1.88
1	*2437.00	92.20 AV			1.03 H	215	94.08	-1.88
2	3248.00	44.40 PK	74.00	-29.60	1.02 H	2	43.72	0.68
2	3248.00	32.40 AV	54.00	-21.60	1.02 H	2	31.72	0.68
3	4874.00	49.60 PK	74.00	-24.40	1.08 H	54	45.23	4.37
3	4874.00	35.60 AV	54.00	-18.40	1.08 H	54	31.23	4.37

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	115.30 PK			1.07 V	74	117.25	-1.95
1	*2437.00	105.00 AV			1.07 V	74	106.95	-1.95
2	3248.00	44.90 PK	74.00	-29.10	1.05 V	320	44.59	0.31
2	3248.00	32.90 AV	54.00	-21.10	1.05 V	320	32.59	0.31
3	4874.00	51.10 PK	74.00	-22.90	1.55 V	65	47.29	3.81
3	4874.00	37.60 AV	54.00	-16.40	1.55 V	65	33.79	3.81

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	6.5Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 66%RH, 971hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.10 PK			1.05 H	58	104.02	-1.92
1	*2462.00	92.10 AV			1.05 H	58	94.02	-1.92
2	2483.50	60.70 PK	74.00	-13.30	1.02 H	3	62.65	-1.95
2	2483.50	43.60 AV	54.00	-10.40	1.02 H	3	45.55	-1.95
3	3282.00	44.30 PK	74.00	-29.70	1.07 H	330	43.78	0.52
3	3282.00	32.40 AV	54.00	-21.60	1.07 H	330	31.88	0.52
4	4924.00	49.30 PK	74.00	-24.70	1.04 H	265	44.83	4.47
4	4924.00	35.20 AV	54.00	-18.80	1.04 H	265	30.73	4.47

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	115.20 PK			1.06 V	78	117.16	-1.96
1	*2462.00	104.90 AV			1.06 V	78	106.86	-1.96
2	2483.50	68.10 PK	74.00	-5.90	1.05 V	17	70.08	-1.98
2	2483.50	52.80 AV	54.00	-1.20	1.05 V	17	54.78	-1.98
3	3282.00	45.30 PK	74.00	-28.70	1.05 V	312	45.13	0.17
3	3282.00	32.90 AV	54.00	-21.10	1.05 V	312	32.73	0.17
4	4924.00	51.30 PK	74.00	-22.70	1.20 V	28	47.45	3.85
4	4924.00	40.30 AV	54.00	-13.70	1.20 V	28	36.45	3.85

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.

DRAFT 802.11n (40MHz) OFDM MODULATION:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	13.5Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 66%RH, 971hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.30 PK	74.00	-10.70	1.05 H	2	65.06	-1.76
1	2390.00	50.10 AV	54.00	-3.90	1.05 H	2	51.86	-1.76
2	*2422.00	97.50 PK			1.06 H	228	99.36	-1.86
2	*2422.00	87.30 AV			1.06 H	228	89.16	-1.86
3	3228.00	52.30 PK	74.00	-21.70	1.00 H	326	51.52	0.78
3	3228.00	42.80 AV	54.00	-11.20	1.00 H	326	42.02	0.78
4	4844.00	48.10 PK	74.00	-25.90	1.08 H	325	43.67	4.43
4	4844.00	34.10 AV	54.00	-19.90	1.08 H	325	29.67	4.43

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.50 PK	74.00	-6.50	1.10 V	4	69.39	-1.89
1	2390.00	53.20 AV	54.00	-0.80	1.10 V	4	55.09	-1.89
2	*2422.00	111.40 PK			1.10 V	10	113.34	-1.94
2	*2422.00	99.20 AV			1.10 V	10	101.14	-1.94
3	3228.00	54.20 PK	74.00	-19.80	1.00 V	254	53.80	0.40
3	3228.00	44.80 AV	54.00	-9.20	1.00 V	254	44.40	0.40
4	4844.00	49.10 PK	74.00	-24.90	1.38 V	28	45.22	3.88
4	4844.00	35.10 AV	54.00	-18.90	1.38 V	28	31.22	3.88

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	13.5Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 66%RH, 971hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	99.10 PK			1.05 H	214	100.98	-1.88
1	*2437.00	88.60 AV			1.05 H	214	90.48	-1.88
2	4874.00	49.50 PK	74.00	-24.50	1.14 H	58	45.13	4.37
2	4874.00	35.10 AV	54.00	-18.90	1.14 H	58	30.73	4.37

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.10 PK	74.00	-6.90	1.10 V	80	68.99	-1.89
1	2390.00	49.70 AV	54.00	-4.30	1.10 V	80	51.59	-1.89
2	*2437.00	112.90 PK			1.05 V	77	114.85	-1.95
2	*2437.00	100.70 AV			1.05 V	77	102.65	-1.95
3	2483.50	68.40 PK	74.00	-5.60	1.32 V	261	70.38	-1.98
3	2483.50	53.10 AV	54.00	-0.90	1.32 V	261	55.08	-1.98
4	4874.00	50.50 PK	74.00	-23.50	1.55 V	36	46.69	3.81
4	4874.00	36.50 AV	54.00	-17.50	1.55 V	36	32.69	3.81

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	13.5Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 66%RH, 971hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	95.90 PK			1.08 H	322	97.80	-1.90
1	*2452.00	86.00 AV			1.08 H	322	87.90	-1.90
2	2483.50	63.10 PK	74.00	-10.90	1.08 H	3	65.05	-1.95
2	2483.50	50.10 AV	54.00	-3.90	1.08 H	3	52.05	-1.95
3	3269.00	52.20 PK	74.00	-21.80	1.10 H	352	51.61	0.59
3	3269.00	42.50 AV	54.00	-11.50	1.10 H	352	41.91	0.59
4	4904.00	47.10 PK	74.00	-26.90	1.05 H	302	42.75	4.35
4	4904.00	33.30 AV	54.00	-20.70	1.05 H	302	28.95	4.35

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	110.00 PK			1.08 V	2	111.96	-1.96
1	*2452.00	98.00 AV			1.08 V	2	99.96	-1.96
2	2483.50	67.70 PK	74.00	-6.30	1.08 V	170	69.68	-1.98
2	2483.50	53.20 AV	54.00	-0.80	1.08 V	170	55.18	-1.98
3	3269.00	54.40 PK	74.00	-19.60	1.05 V	265	54.18	0.22
3	3269.00	44.90 AV	54.00	-9.10	1.05 V	265	44.68	0.22
4	4904.00	48.10 PK	74.00	-25.90	1.25 V	12	44.33	3.77
4	4904.00	34.00 AV	54.00	-20.00	1.25 V	12	30.23	3.77

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * ”: Fundamental frequency.



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2006

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

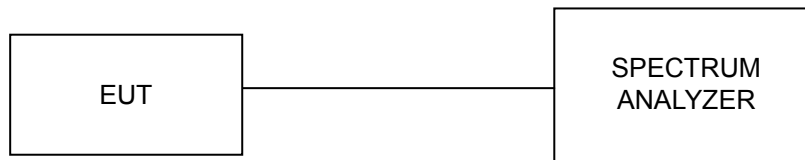

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 TEST RESULTS

802.11b DSSS MODULATION:


MODULATION TYPE	CCK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 68%RH, 971hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
1	2412	11.08	10.16	10.08	0.5	PASS
6	2437	10.12	11.08	10.12	0.5	PASS
11	2462	10.16	11.12	10.16	0.5	PASS


FOR CHAIN 0: CH1

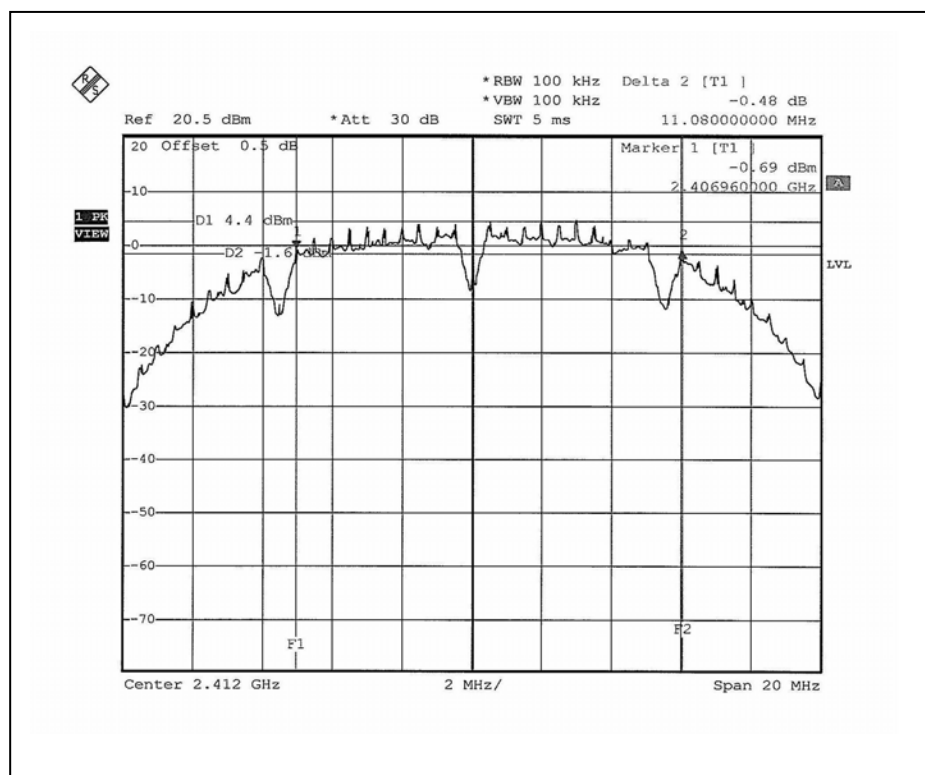


CH6

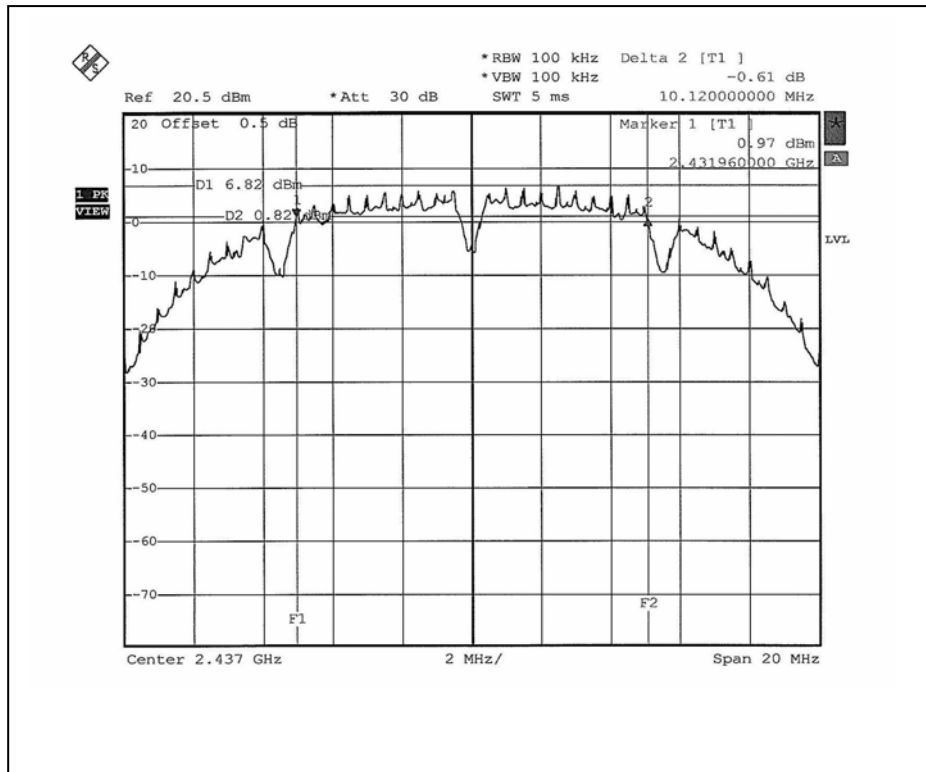


CH11

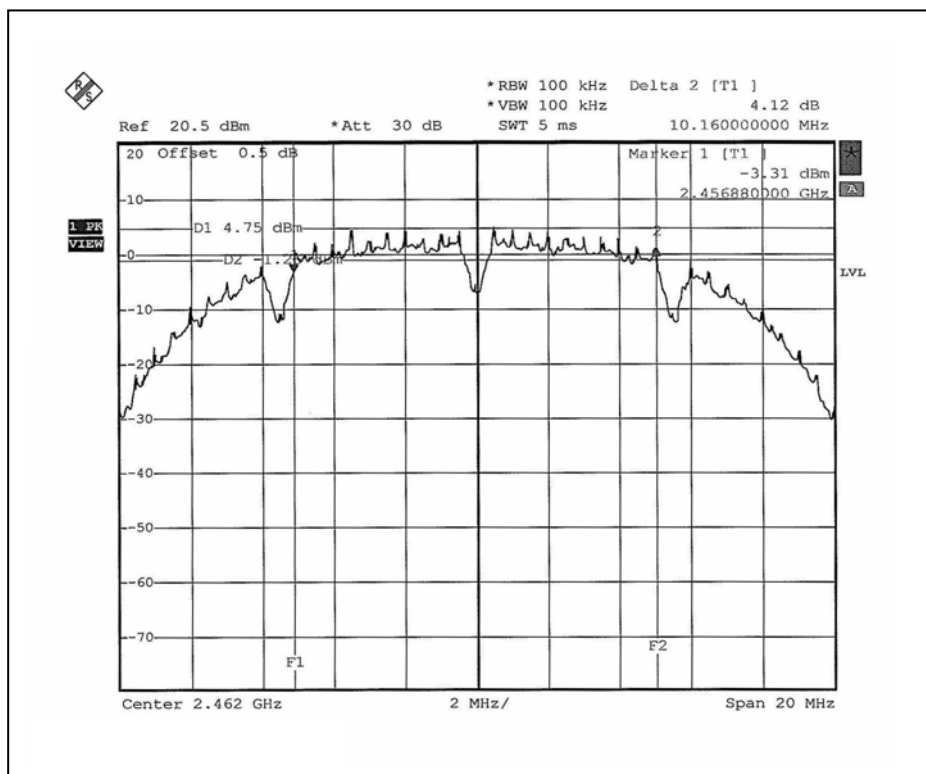


FOR CHAIN 1: CH1

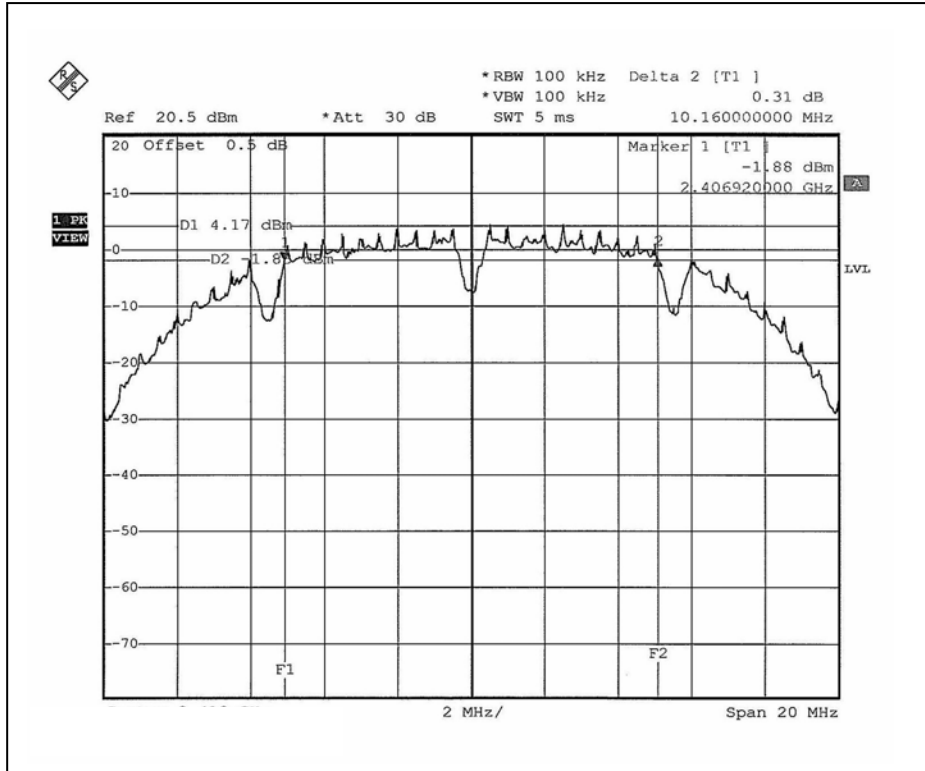


CH6

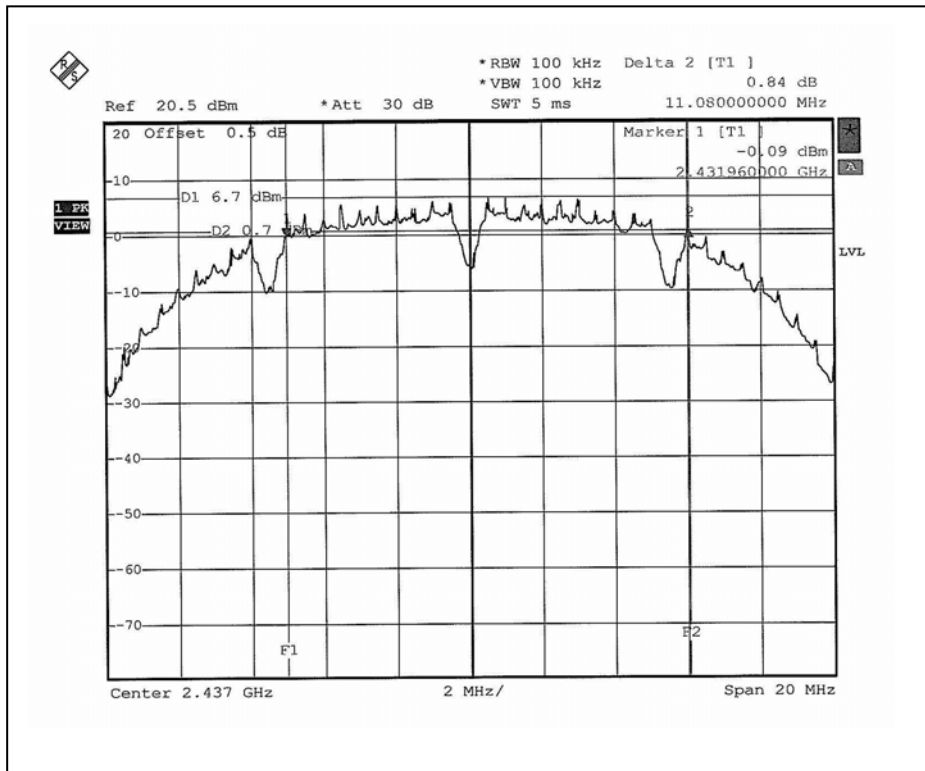


CH11

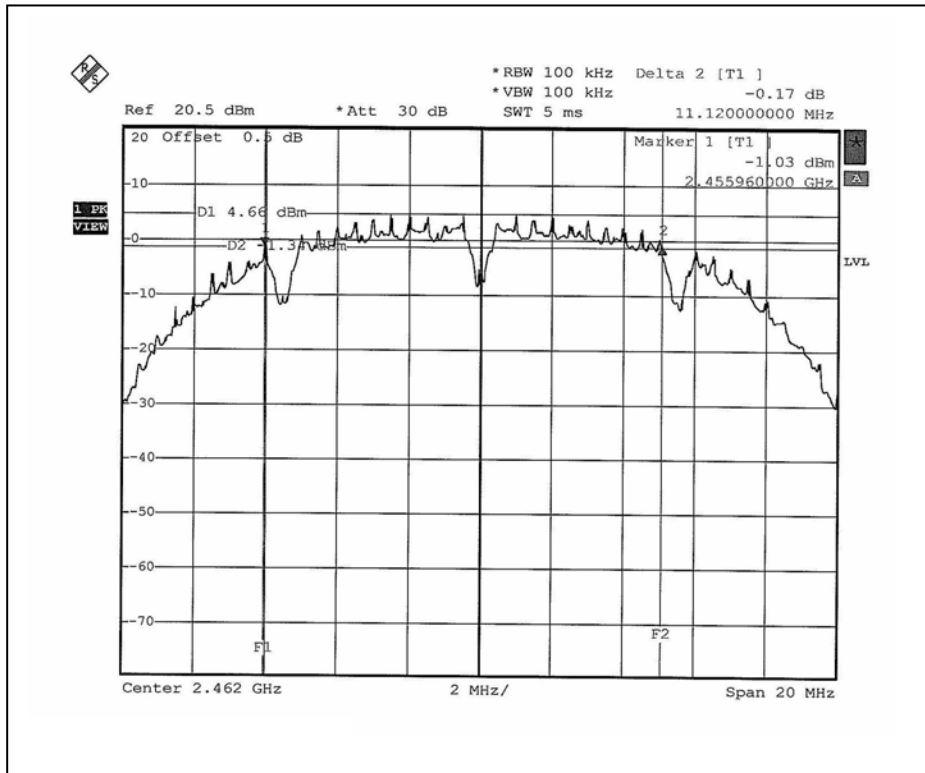


FOR CHAIN 2: CH1

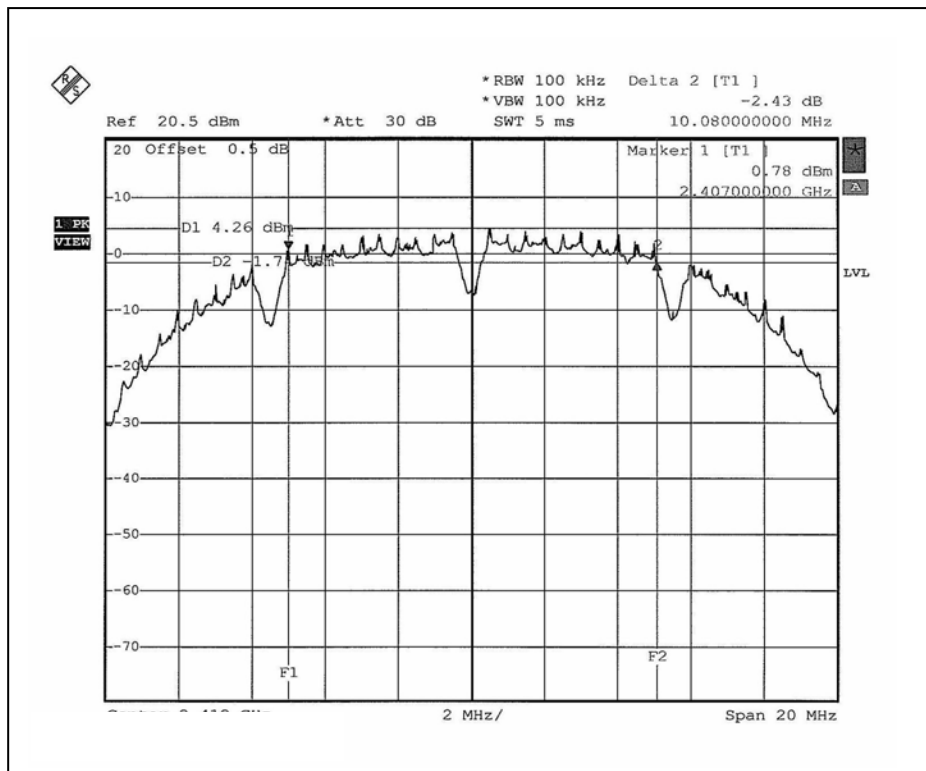

CH6

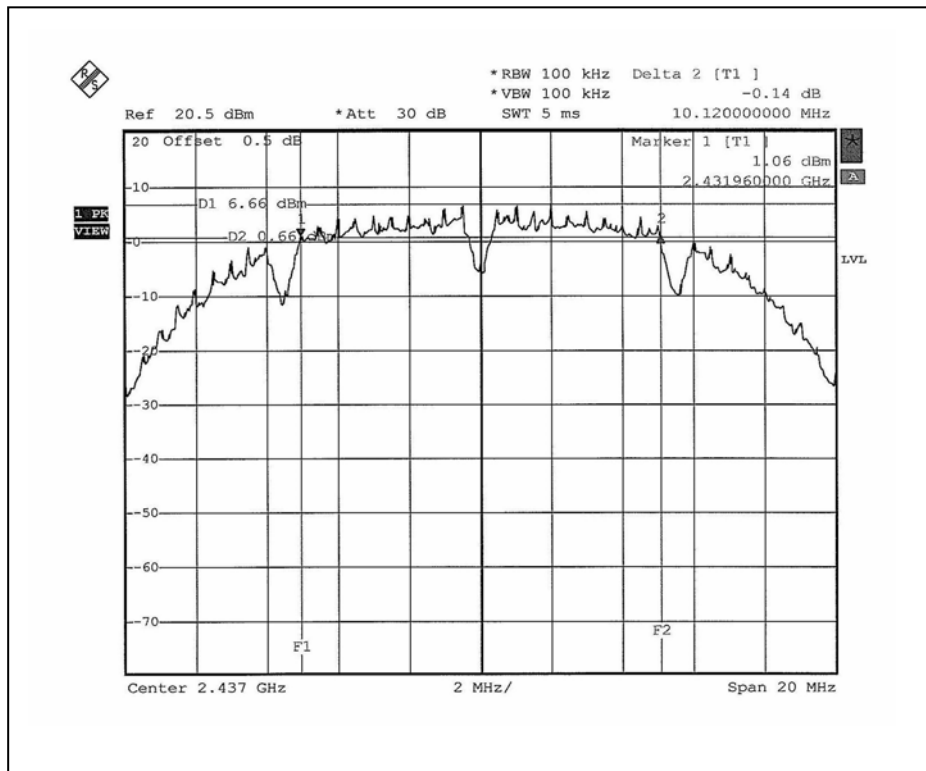

CH11

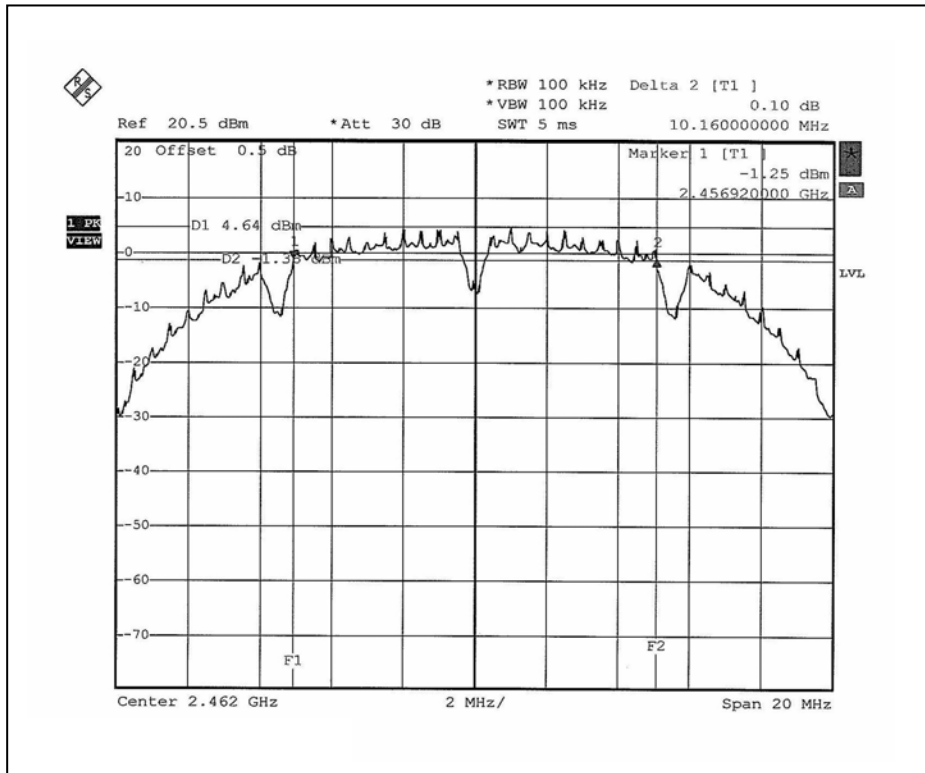


802.11g OFDM MODULATION:


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 68%RH, 971hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
1	2412	16.36	16.28	16.28	0.5	PASS
6	2437	16.28	16.24	16.36	0.5	PASS
11	2462	16.40	16.40	16.40	0.5	PASS


FOR CHAIN 0: CH1

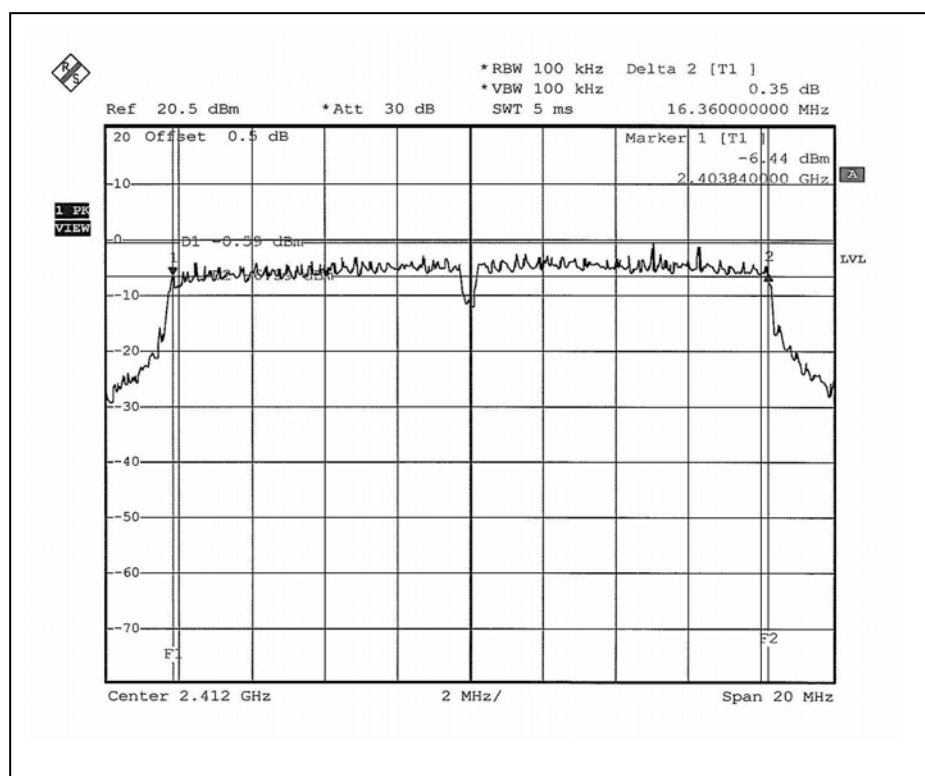


CH6

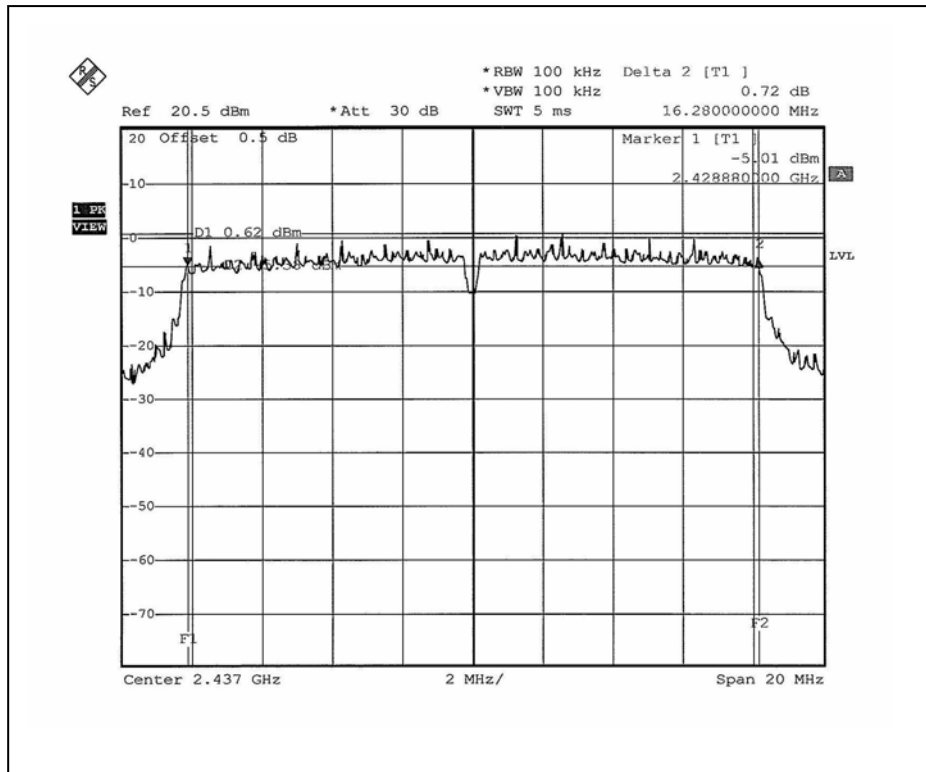


CH11

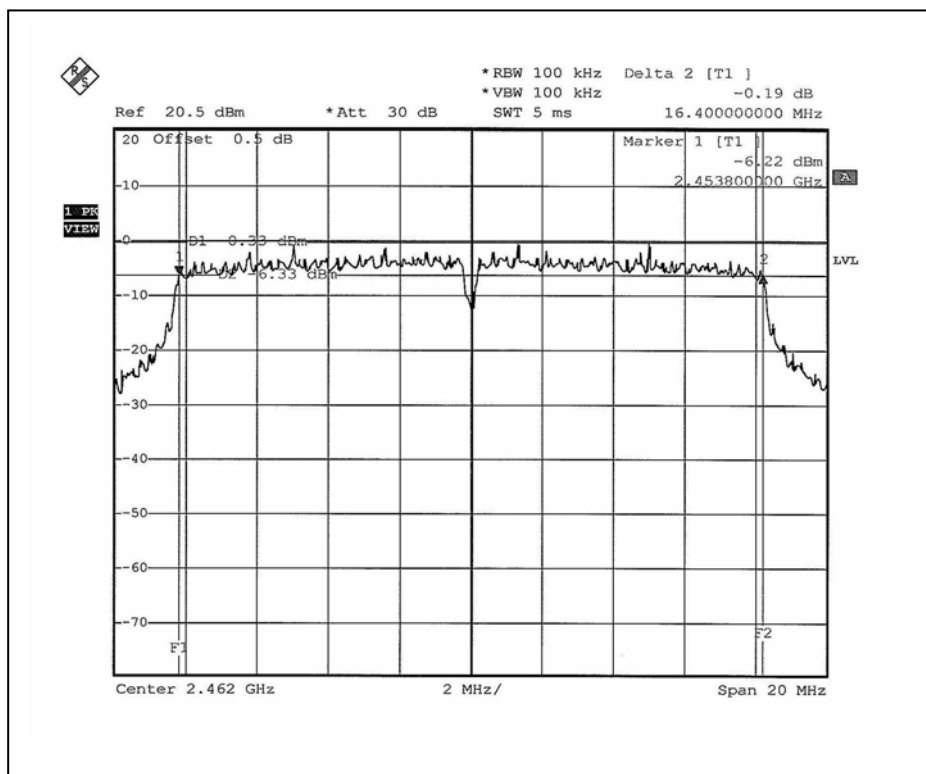


FOR CHAIN 1: CH1

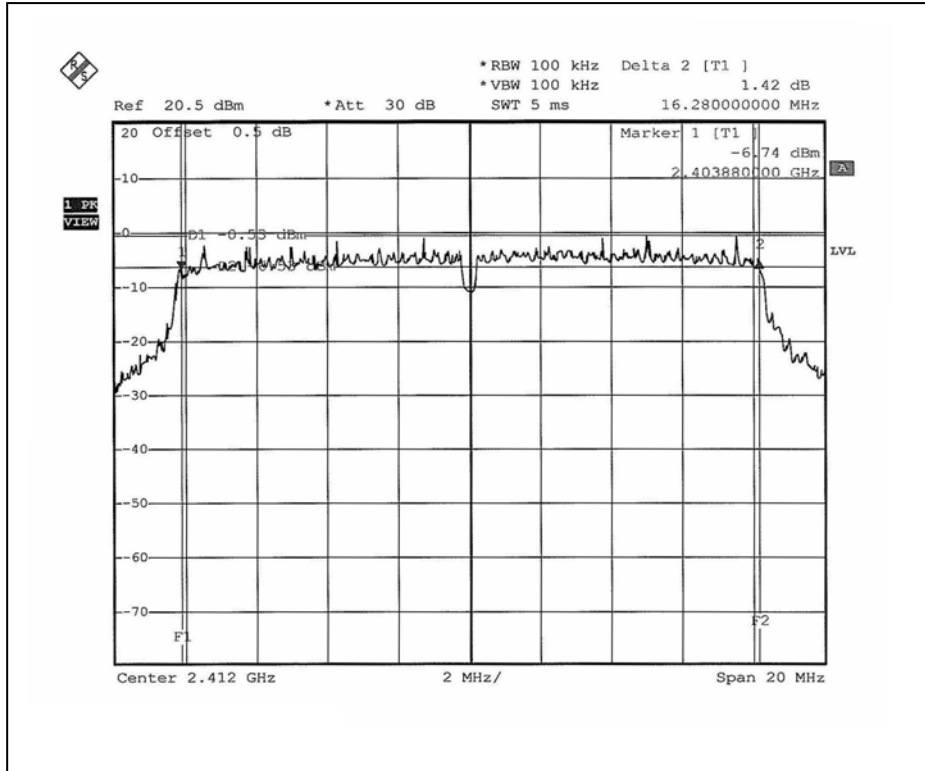


CH6

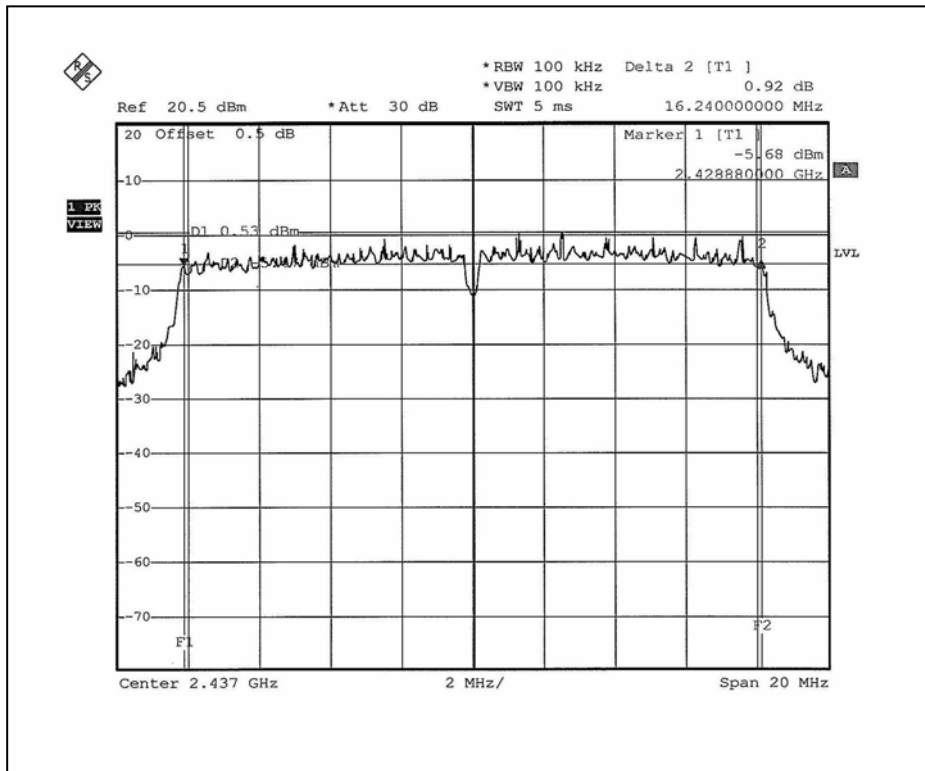


CH11

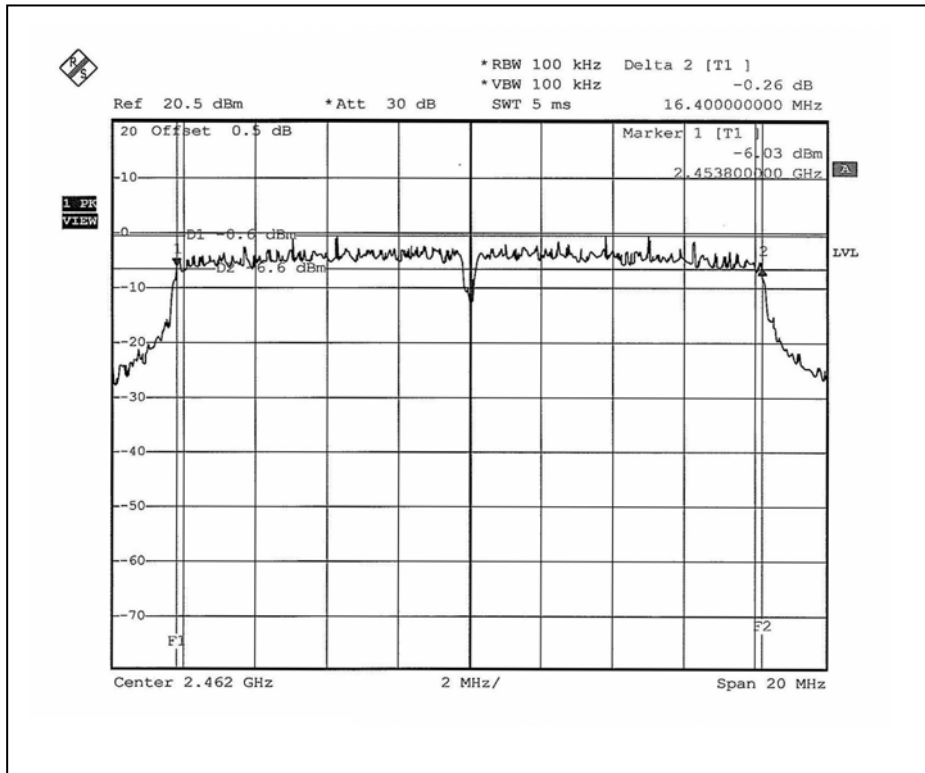


FOR CHAIN 2: CH1

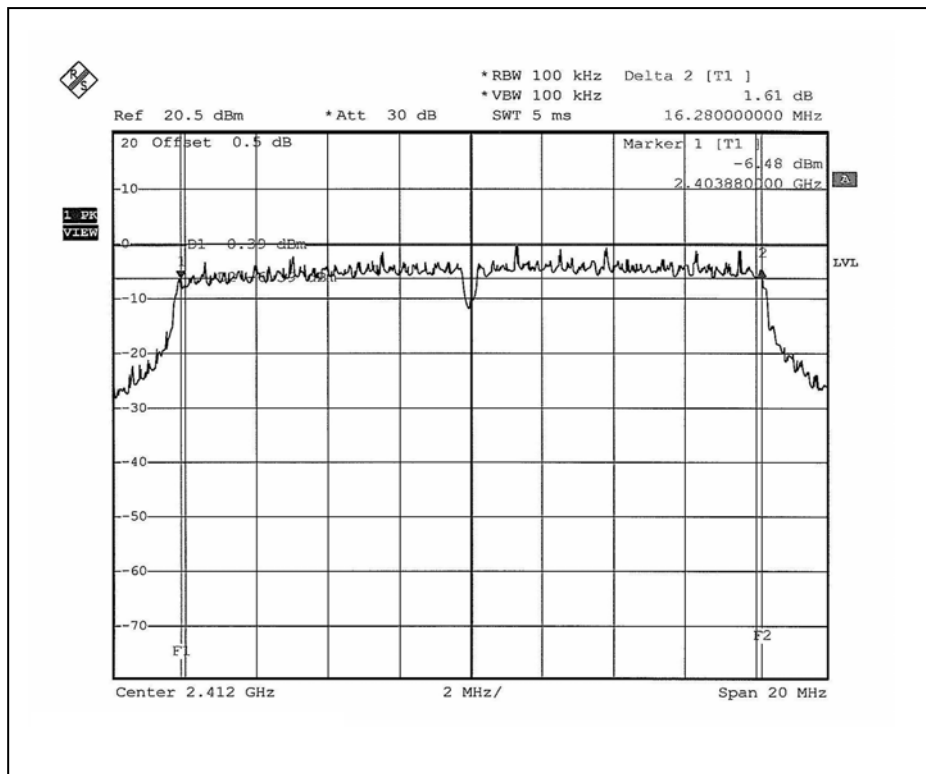

CH6

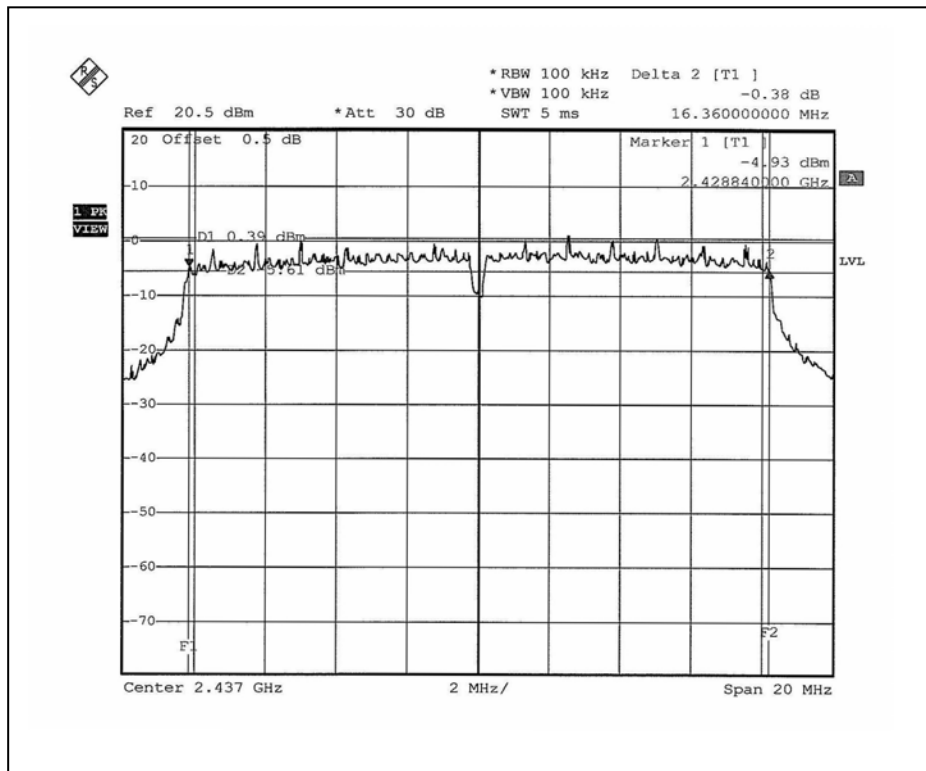

CH11

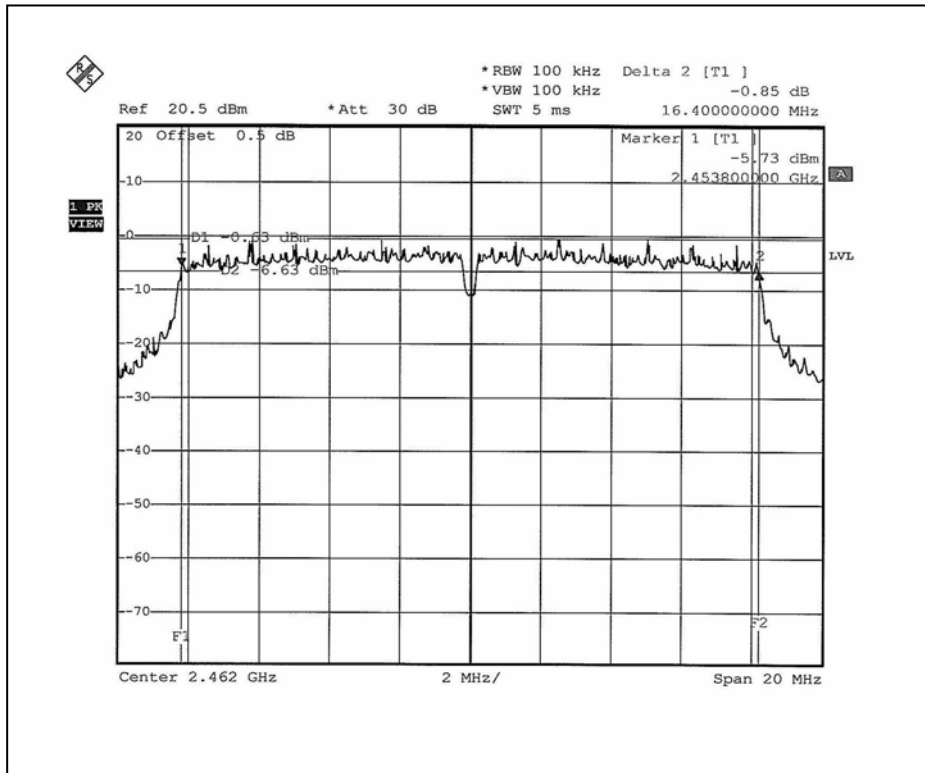


DRAFT 802.11n (20MHz) OFDM MODULATION:


MODULATION TYPE	BPSK	TRANSFER RATE	6.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 68%RH, 971hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
1	2412	17.64	16.96	17.64	0.5	PASS
6	2437	17.36	17.56	17.56	0.5	PASS
11	2462	17.56	17.60	17.60	0.5	PASS


FOR CHAIN 0: CH1

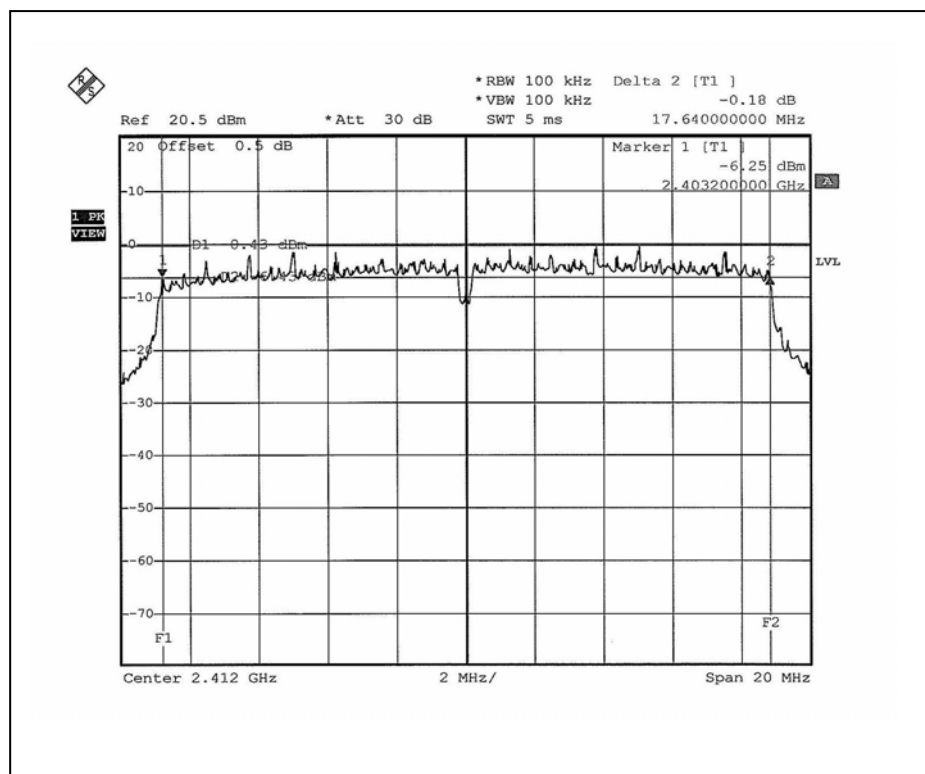


CH6

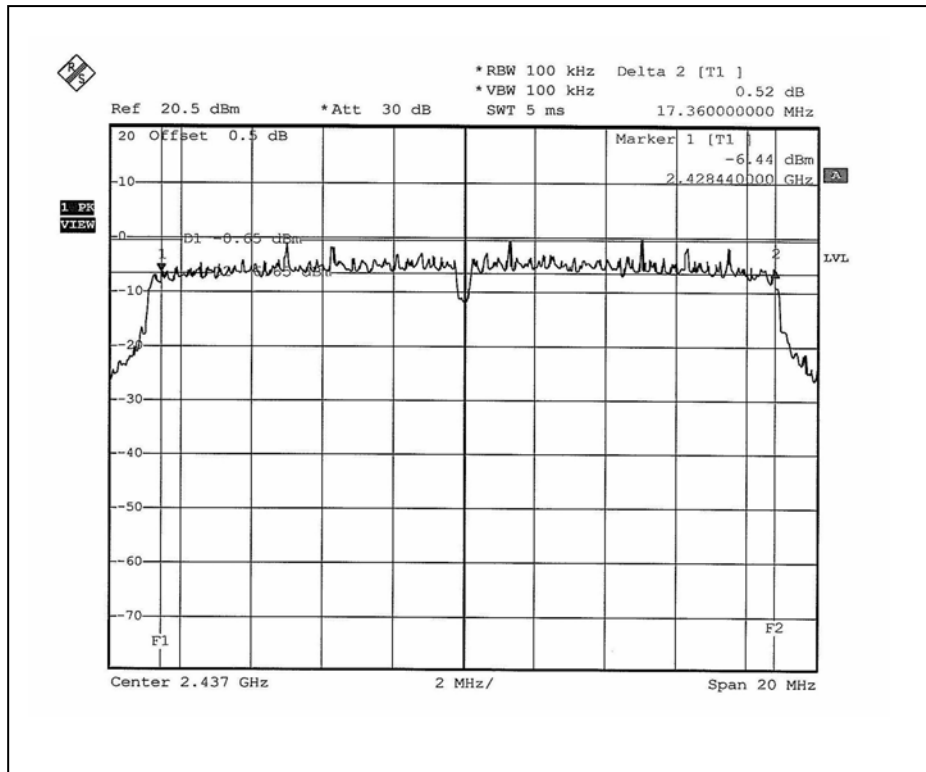


CH11

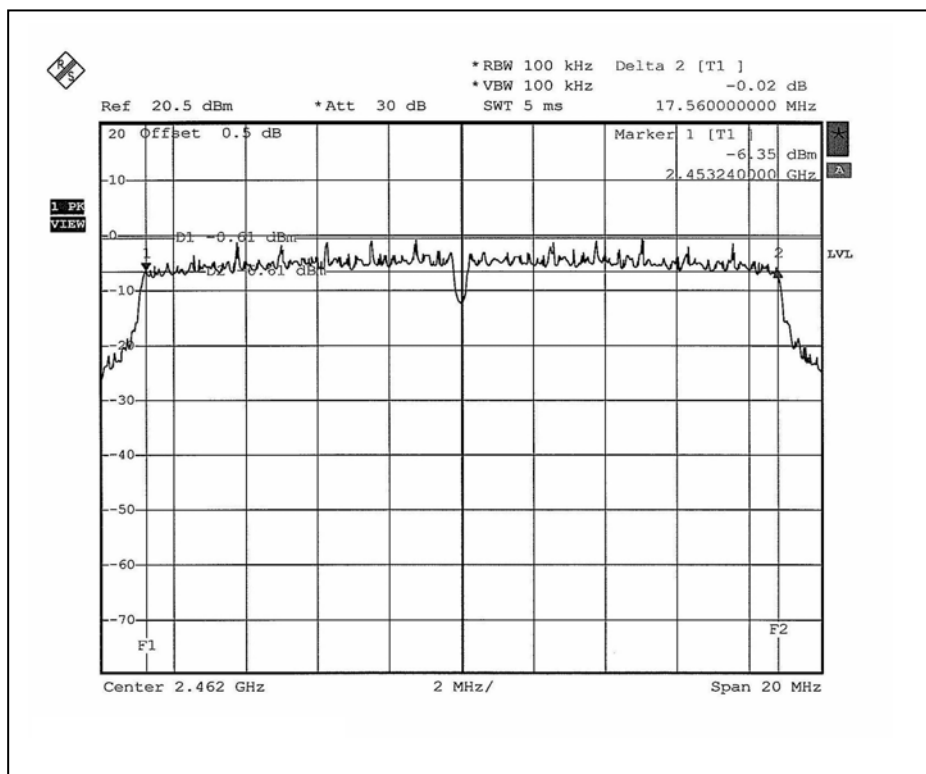


FOR CHAIN 1: CH1

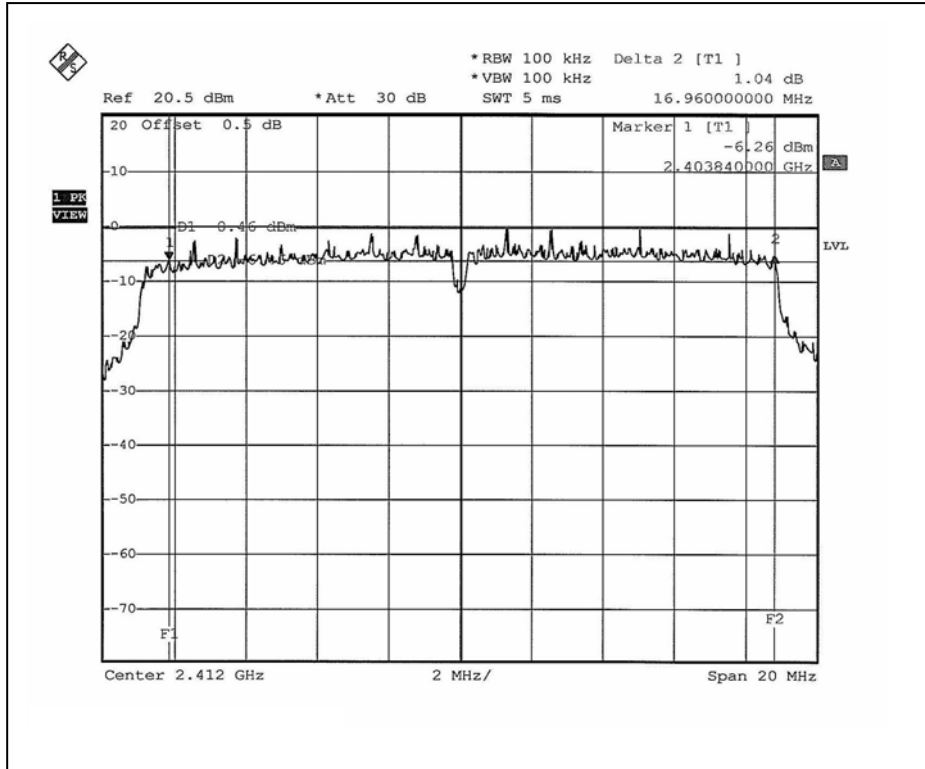


CH6

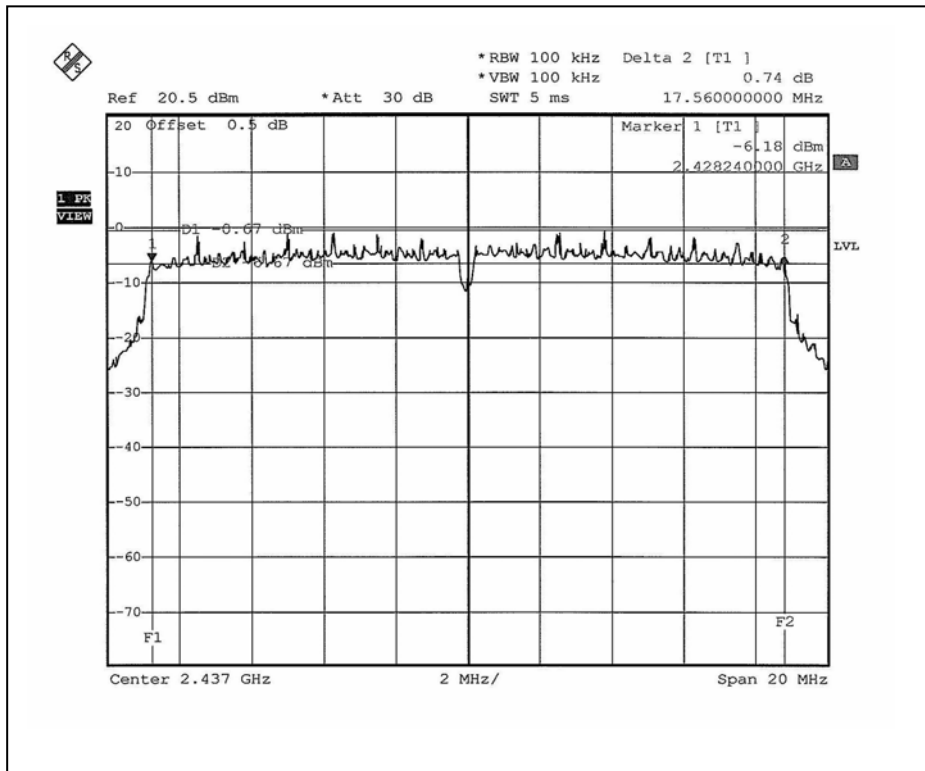


CH11

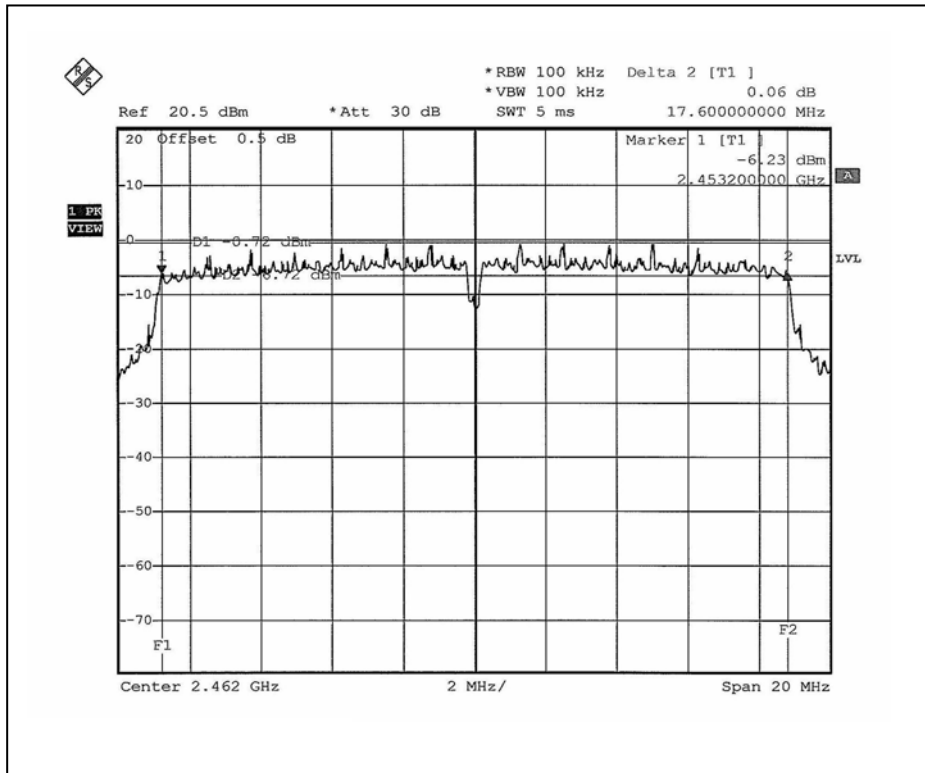


FOR CHAIN 2: CH1

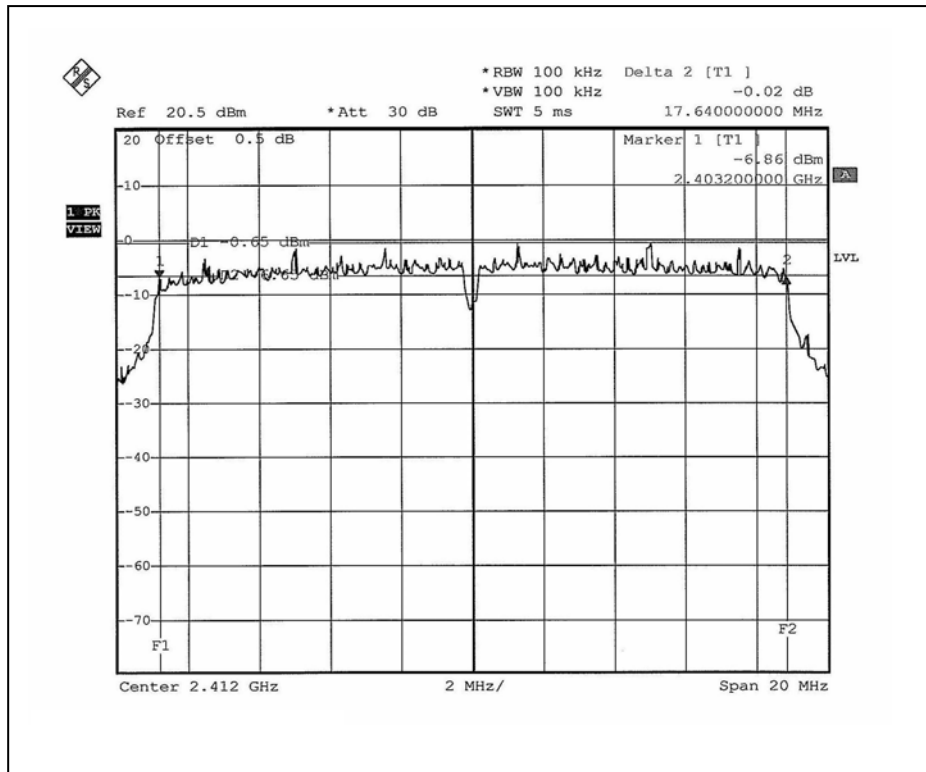

CH6

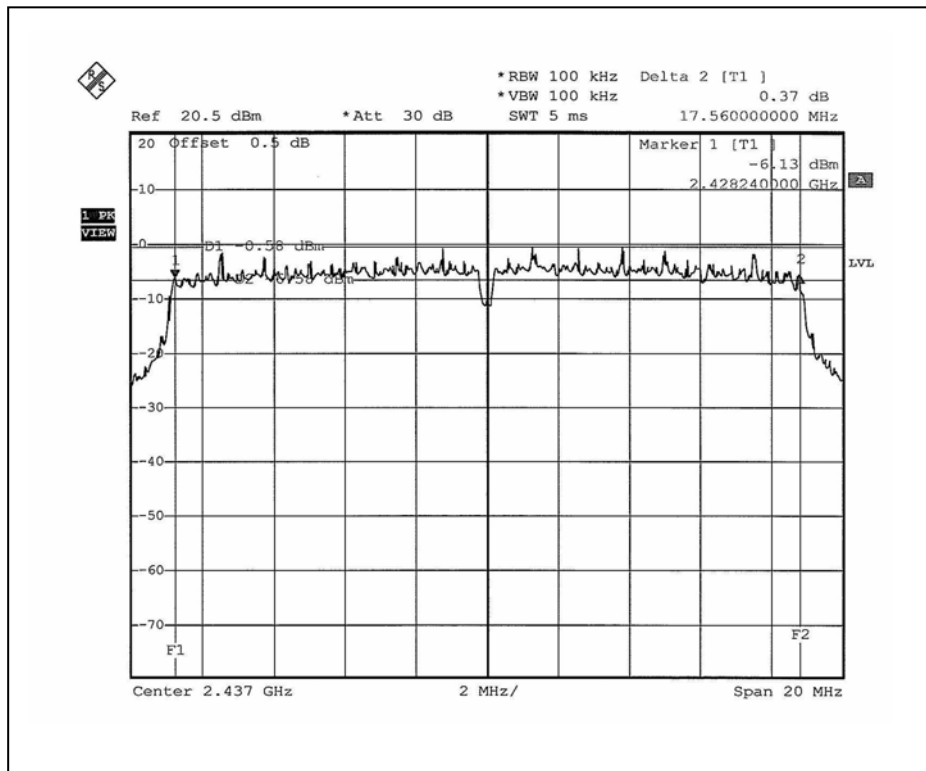

CH11

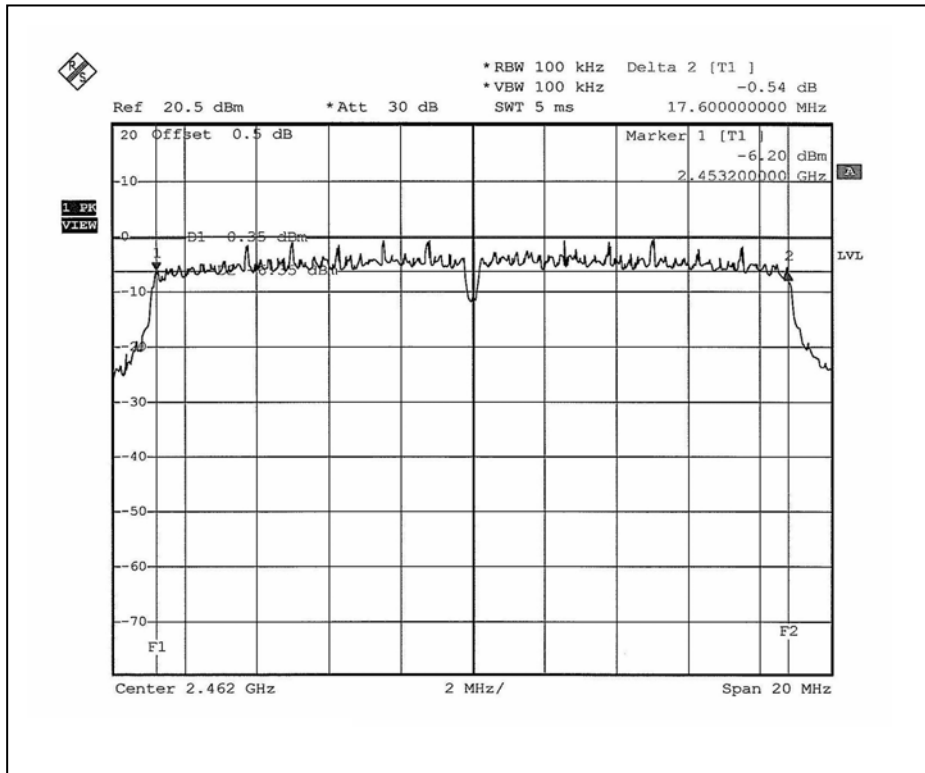


DRAFT 802.11n (40MHz) OFDM MODULATION:


MODULATION TYPE	BPSK	TRANSFER RATE	13.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg.C, 68%RH, 971hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
1	2422	35.68	35.76	35.76	0.5	PASS
4	2437	35.84	36.08	35.76	0.5	PASS
7	2452	35.84	36.16	36.16	0.5	PASS


FOR CHAIN 0: CH1

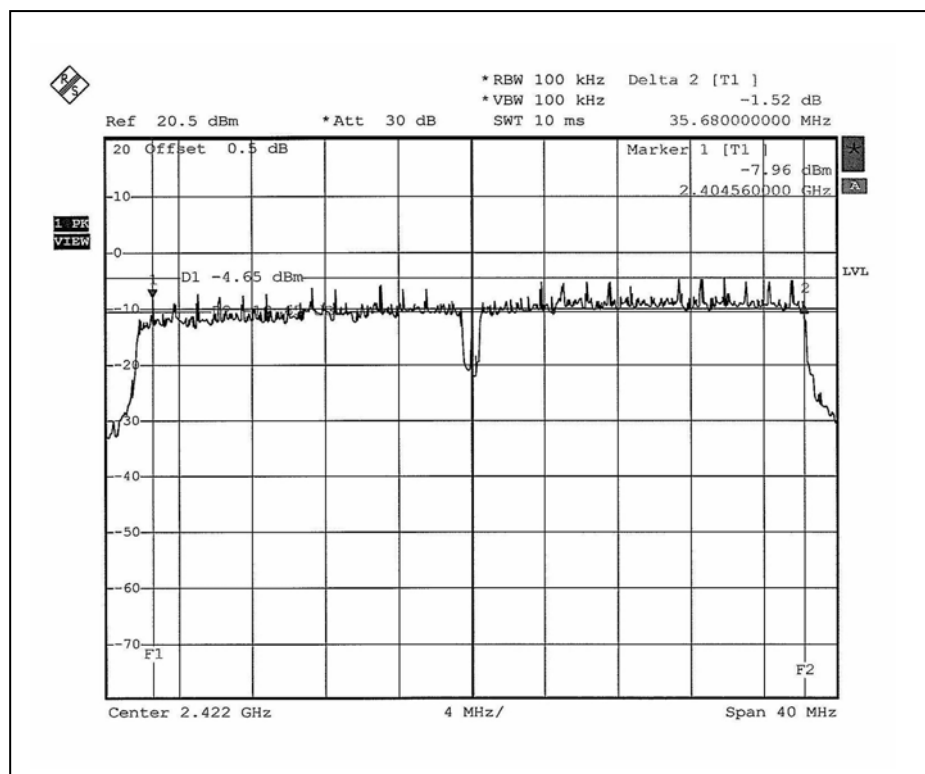


CH4

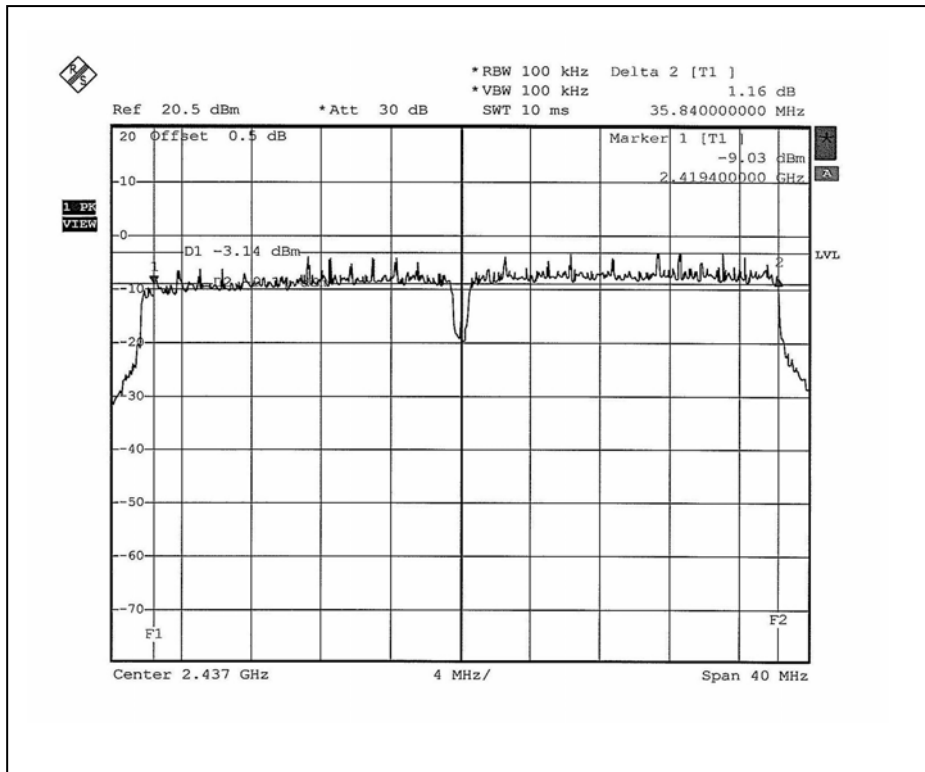


CH7

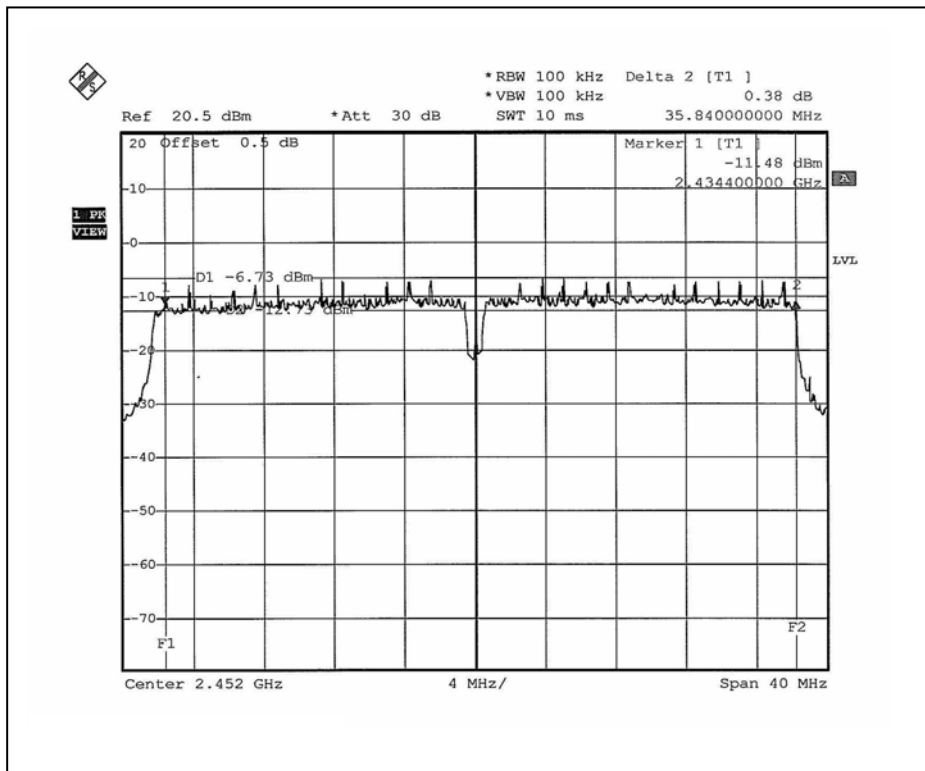


FOR CHAIN 1: CH1

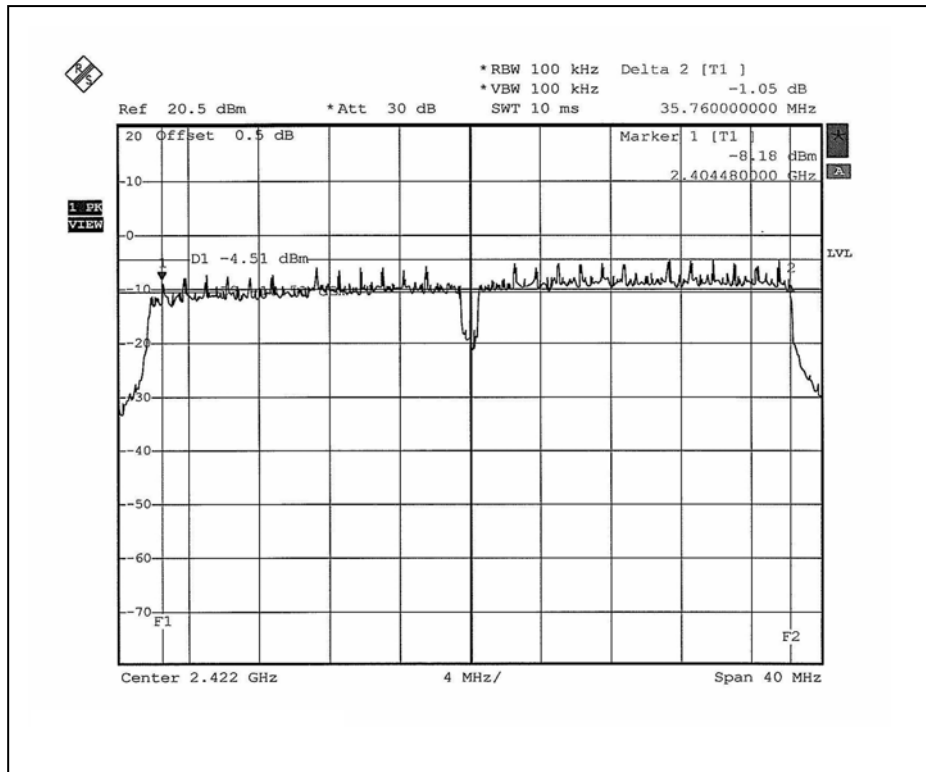


CH4

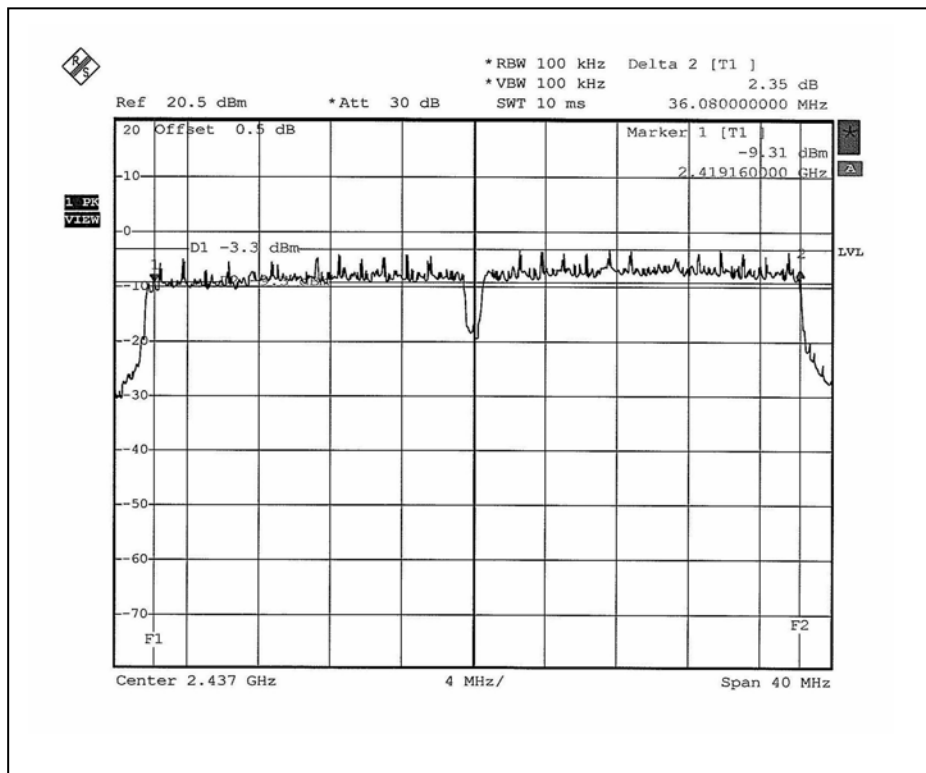


CH7

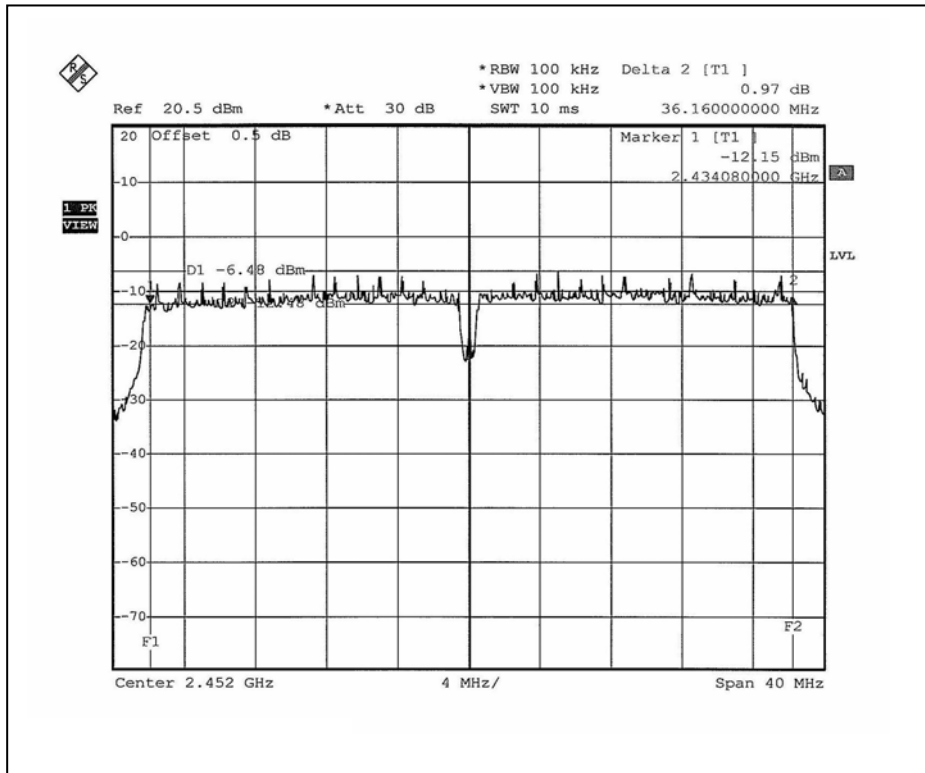

FOR CHAIN 2: CH1

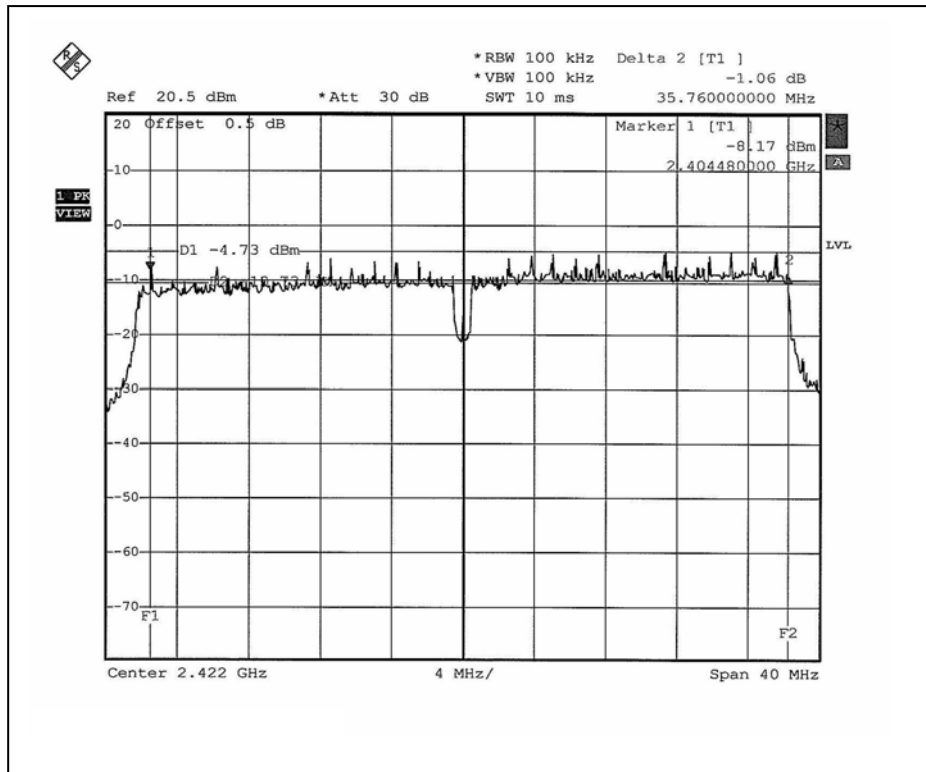

CH4

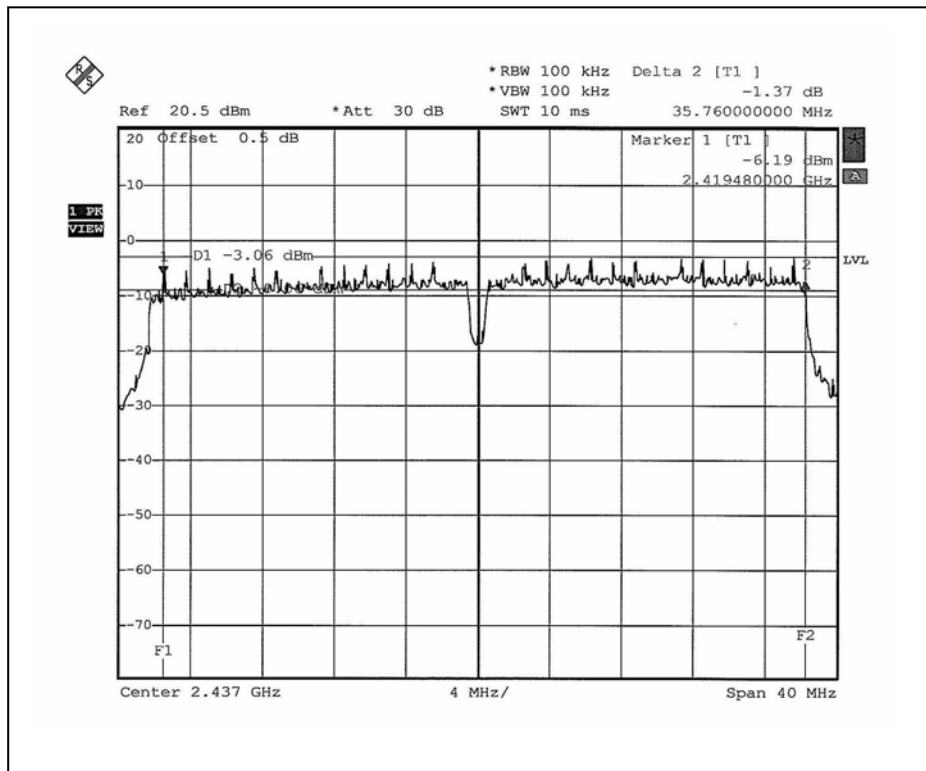

CH7

