



A D T

FCC TEST REPORT (15.247)

REPORT NO.: RF970915L09

MODEL NO.: WRT400N

RECEIVED: Sep. 15, 2008

TESTED: Dec. 16 ~ Dec. 29, 2008

ISSUED: Dec. 31, 2008

APPLICANT: Cisco-Linksys LLC

ADDRESS: 121 Theory Drive Irvine, CA 92617 (USA)

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang, Taipei Hsien 244, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan,
R.O.C.

No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang, Taipei Hsien 244, Taiwan, R.O.C.

This test report consists of 171 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





A D T

TABLE OF CONTENTS

1.	CERTIFICATION.....	5
2.	SUMMARY OF TEST RESULTS	6
2.1	MEASUREMENT UNCERTAINTY.....	6
3.	GENERAL INFORMATION.....	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES.....	9
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	10
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	11
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	15
3.4	DESCRIPTION OF SUPPORT UNITS	16
4.	TEST TYPES AND RESULTS (FOR 2.4GHz BAND).....	17
4.1	RADIATED EMISSION MEASUREMENT	17
4.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	17
4.1.2	TEST INSTRUMENTS.....	18
4.1.3	TEST PROCEDURES	20
4.1.4	DEVIATION FROM TEST STANDARD.....	20
4.1.5	TEST SETUP.....	21
4.1.6	EUT OPERATING CONDITIONS	22
4.1.7	TEST RESULTS	23
4.2	CONDUCTED EMISSION MEASUREMENT	37
4.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	37
4.2.2	TEST INSTRUMENTS.....	37
4.2.3	TEST PROCEDURES	38
4.2.4	DEVIATION FROM TEST STANDARD.....	38
4.2.5	TEST SETUP.....	39
4.2.6	EUT OPERATING CONDITIONS	39
4.2.7	TEST RESULTS	40
4.3	6dB BANDWIDTH MEASUREMENT.....	44
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	44
4.3.2	TEST INSTRUMENTS.....	44
4.3.3	TEST PROCEDURE.....	44
4.3.4	DEVIATION FROM TEST STANDARD.....	44
4.3.5	TEST SETUP.....	45
4.3.6	EUT OPERATING CONDITIONS	45
4.3.7	TEST RESULTS	46
4.4	MAXIMUM PEAK OUTPUT POWER.....	62
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	62
4.4.2	INSTRUMENTS.....	62
4.4.3	TEST PROCEDURES	62
4.4.4	DEVIATION FROM TEST STANDARD.....	63
4.4.5	TEST SETUP.....	63
4.4.6	EUT OPERATING CONDITIONS	63
4.4.7	TEST RESULTS	64
4.5	POWER SPECTRAL DENSITY MEASUREMENT	66
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	66
4.5.2	TEST INSTRUMENTS.....	66
4.5.3	TEST PROCEDURE.....	66
4.5.4	DEVIATION FROM TEST STANDARD.....	67



A D T

4.5.5	TEST SETUP	67
4.5.6	EUT OPERATING CONDITION.....	67
4.5.7	TEST RESULTS	68
4.6	BAND EDGES MEASUREMENT	84
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	84
4.6.2	TEST INSTRUMENTS.....	84
4.6.3	TEST PROCEDURE.....	85
4.6.4	DEVIATION FROM TEST STANDARD.....	86
4.6.5	EUT OPERATING CONDITION.....	86
4.6.6	TEST RESULTS	87
4.7	ANTENNA REQUIREMENT	103
4.7.1	STANDARD APPLICABLE	103
4.7.2	ANTENNA CONNECTED CONSTRUCTION	103
5.	TEST TYPES AND RESULTS (FOR 5.0GHz BAND)	104
5.1	RADIATED EMISSION MEASUREMENT	104
5.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	104
5.1.2	TEST INSTRUMENTS.....	105
5.1.3	TEST PROCEDURES	107
5.1.4	DEVIATION FROM TEST STANDARD.....	107
5.1.5	TEST SETUP.....	108
5.1.6	EUT OPERATING CONDITIONS	108
5.1.7	TEST RESULTS	109
5.2	CONDUCTED EMISSION MEASUREMENT	119
5.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	119
5.2.2	TEST INSTRUMENTS.....	119
5.2.3	TEST PROCEDURES	120
5.2.4	DEVIATION FROM TEST STANDARD.....	120
5.2.5	TEST SETUP.....	121
5.2.6	EUT OPERATING CONDITIONS	121
5.2.7	TEST RESULTS	122
5.3	6dB BANDWIDTH MEASUREMENT	126
5.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	126
5.3.2	TEST INSTRUMENTS.....	126
5.3.3	TEST PROCEDURE.....	126
5.3.4	DEVIATION FROM TEST STANDARD.....	127
5.3.5	TEST SETUP.....	127
5.3.6	EUT OPERATING CONDITIONS	127
5.3.7	TEST RESULTS	128
5.4	MAXIMUM PEAK OUTPUT POWER.....	139
5.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	139
5.4.2	INSTRUMENTS.....	139
5.4.3	TEST PROCEDURES	139
5.4.4	DEVIATION FROM TEST STANDARD.....	140
5.4.5	TEST SETUP.....	140
5.4.6	EUT OPERATING CONDITIONS	140
5.4.7	TEST RESULTS	141
5.5	POWER SPECTRAL DENSITY MEASUREMENT	143
5.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	143
5.5.2	TEST INSTRUMENTS.....	143
5.5.3	TEST PROCEDURE.....	143
5.5.4	DEVIATION FROM TEST STANDARD.....	144



A D T

5.5.5	TEST SETUP	144
5.5.6	EUT OPERATING CONDITION.....	144
5.5.7	TEST RESULTS	145
5.6	BAND EDGES MEASUREMENT	156
5.6.1	LIMITS OF BAND EDGES MEASUREMENT	156
5.6.2	TEST INSTRUMENTS.....	156
5.6.3	TEST PROCEDURE.....	157
5.6.4	DEVIATION FROM TEST STANDARD.....	158
5.6.5	EUT OPERATING CONDITION.....	158
5.6.6	TEST RESULTS	158
5.7	ANTENNA REQUIREMENT	168
5.7.1	STANDARD APPLICABLE	168
5.7.2	ANTENNA CONNECTED CONSTRUCTION	168
6.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	169
7.	INFORMATION ON THE TESTING LABORATORIES	170
8.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	171



A D T

1. CERTIFICATION

PRODUCT: Simultaneous Dual-Band Wireless-N Router

MODEL: WRT400N

BRAND: Linksys by Cisco

APPLICANT: Cisco-Linksys LLC

TEST SAMPLE: ENGINEERING SAMPLE

TESTED: Dec. 16 ~ Dec. 29, 2008

STANDARDS: FCC Part 15, Subpart C (Section 15.247)

ANSI C63.4-2003

The above equipment (Model: WRT400N) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : *Peggy Chen* , **DATE:** Dec. 31, 2008
Peggy Chen / Specialist

TECHNICAL ACCEPTANCE : *Long Chen* , **DATE:** Dec. 31, 2008
Responsible for RF Long Chen / Senior Engineer

APPROVED BY : *Gary Chang* , **DATE:** Dec. 31, 2008
Gary Chang / Assistant Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -14.54dB at 0.158MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.08dB at 2483.50MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 1000MHz	4.03 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Simultaneous Dual-Band Wireless-N Router
MODEL NO.	WRT400N
FCC ID	Q87-WRT400N
POWER SUPPLY	12Vdc from AC adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b:11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps Draft 802.11n: up to 300.0Mbps
FREQUENCY RANGE	2.4GHz: 2400.0 ~ 2483.5MHz 5.0GHz: 5150.0 ~ 5250.0MHz, 5725.0 ~ 5825.0MHz
NUMBER OF CHANNEL	2.4GHz: 11 for 802.11b, 802.11g, draft 802.11n (20MHz) 7 for draft 802.11n (40MHz) 5.0GHz: 9 for 802.11a, draft 802.11n (20MHz) 4 for draft 802.11n (40MHz)
OUTPUT POWER	406.940mW for 2400.0 ~ 2483.5MHz 41.033mW for 5150.0 ~ 5250.0MHz 577.965mW for 5725.0 ~ 5825.0MHz
ANTENNA TYPE	Refer to Note 5
DATA CABLE	NA
I/O PORTS	RJ45
ACCESSORY DEVICE	Adapter

NOTE:

1. The EUT is a Simultaneous Dual-Band Wireless-N Router. The functions of EUT listed as below:

	TEST STANDARD	REFERENCE REPORT
WLAN 802.11b/g, draft 802.11n	FCC Part 15, Subpart C (Section 15.247)	RF970915L09
WLAN 802.11a, draft 802.11n (5725~5825 MHz)		
WLAN 802.11a, draft 802.11n (5150~ 5250MHz)	FCC Part 15, Subpart E (Section 15.407)	RF970915L09-1

2. The frequency bands used in this EUT are listed as follows:

Frequency Band (MHz)	2400~2483.5	5150~5250	5725~5825
802.11b	√		
802.11g	√		
802.11a		√	√
Draft 802.11n (20MHz)	√	√	√
Draft 802.11n (40MHz)	√	√	√

3. The EUT was powered by the following adapters:

ADAPTER 1	
BRAND:	BesTec
MODEL:	NA0181WAA
INPUT:	100-240Vac, 1A, 50-60Hz
OUTPUT:	12Vdc, 1.5A
POWER LINE:	1.8m non-shielded cable without core

ADAPTER 2	
BRAND:	LINKSYS
MODEL:	MU18-D120150-A1
INPUT:	100-240Vac, 50/60Hz, 0.6A
OUTPUT:	12Vdc, 1.5A
POWER LINE:	1.8m non-shielded cable without core

4. The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

MODULATION MODE	TX FUNCTION
802.11b	2TX
802.11g	2TX
802.11a	2TX
Draft 802.11n (20MHz)	2TX
Draft 802.11n (40MHz)	2TX

5. There are 4 antennas for the EUT.

No.	Type	Connector	Frequency Band	Antenna Location	Gain(dBi)
1	PIFA	UFL	2.4GHz	Left front	4.19
2				Right rear	1.75
3			5.0GHz	Left rear	5150 MHz: 2.93 dBi
					5250 MHz: 2.81 dBi
4	5.0GHz	Right front	5350 MHz: 3.19 dBi		
			5725 MHz: 4.35 dBi		
			5825 MHz: 3.99 dBi		
			5150 MHz: 3.23 dBi		
	5.0GHz	Right front	5250 MHz: 3.25 dBi		
			5350 MHz: 3.35 dBi		
			5725 MHz: 3.44 dBi		
			5825 MHz: 3.33 dBi		

6. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



3.2 DESCRIPTION OF TEST MODES

FOR 2.4GHz:

11 channels are provided for 802.11b, 802.11g and draft 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for draft 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2422MHz	5	2442MHz
2	2427MHz	6	2447MHz
3	2432MHz	7	2452MHz
4	2437MHz		

FOR 5.0GHz (5725 ~ 5825MHz):


5 channels are provided for 802.11a, draft 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for draft 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
151	5755MHz	159	5795MHz

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

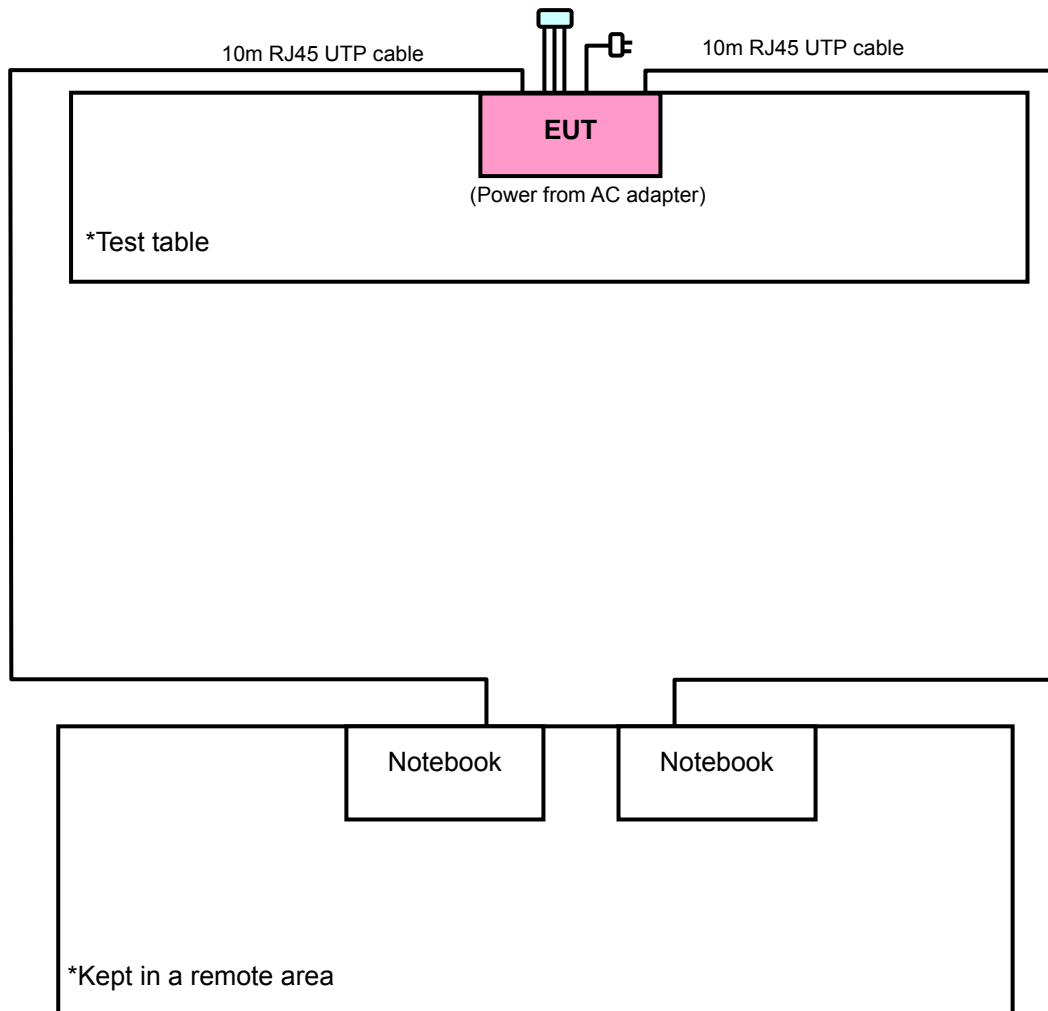



3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL FOR 2.400 ~ 2.4835GHz:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
A	√	√	√	√	Power from AC Adapter 1
B	-	√	√	-	Power from AC Adapter 2

Where **RE≥1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

Note: “-” means no effect.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0	X
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0	X
A	Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2	X
A	Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	15.0	X

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
A	802.11g	1 to 11	6	OFDM	BPSK	6.0	Z
B	802.11g	1 to 11	6	OFDM	BPSK	6.0	Z



POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11g	1 to 11	6	OFDM	BPSK	6.0
B	802.11g	1 to 11	6	OFDM	BPSK	6.0

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
A	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0	X
A	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0	X
A	Draft 802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	7.2	X
A	Draft 802.11n (40MHz)	1 to 7	1, 7	OFDM	BPSK	15.0	X

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
A	Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	15.0



A D T

FOR 5.725 ~ 5.825GHz:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE<1G	PLC	APCM	
A	√	√	√	√	Power from AC Adapter 1
B	-	√	√	-	Power from AC Adapter 2

Where **PLC:** Power Line Conducted Emission **RE<1G:** Radiated Emission below 1GHz
RE \geq 1G: Radiated Emission above 1GHz **APCM:** Antenna Port Conducted Measurement

Note: "-" means no effect.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
A	802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6.0	X
A	Draft 802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	7.2	X
A	Draft 802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	15.0	X

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
A	Draft 802.11n (40MHz)	151 to 159	151	OFDM	BPSK	15.0	Z
B	Draft 802.11n (40MHz)	151 to 159	151	OFDM	BPSK	15.0	Z

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	Draft 802.11n (40MHz)	151 to 159	151	OFDM	BPSK	15.0
B	Draft 802.11n (40MHz)	151 to 159	151	OFDM	BPSK	15.0



A D T

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
A	802.11a	149 to 165	149, 165	OFDM	BPSK	6.0	X
A	Draft 802.11n (20MHz)	149 to 165	149, 165	OFDM	BPSK	7.2	X
A	Draft 802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	15.0	X

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6.0
A	Draft 802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	7.2
A	Draft 802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	15.0



A D T

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



A D T

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Frequency above 1GHz

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	12130898320	E2K24CLNS
2	NOTEBOOK COMPUTER	DELL	PP05L	9954115984	E2K24CLNS

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	10m RJ45 UTP cable
2	10m RJ45 UTP cable

NOTE: 1. All power cords of the above support units are non shielded (1.8m).
2. Item 1, 2 acted as communication partners to transfer data.

Frequency below 1GHz

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	24729091408	FCC DoC Approved
2	NOTEBOOK COMPUTER	CLEVO	M54N	NKM540N06H01430	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	10m RJ45 UTP cable
2	10m RJ45 UTP cable

NOTE: 1. All power cords of the above support units are non shielded (1.8m).
2. Item 1, 2 acted as communication partners to transfer data.



4. TEST TYPES AND RESULTS (FOR 2.4GHz BAND)

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.1.2 TEST INSTRUMENTS

Frequency above 1GHz

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100212	May 28, 2008	May 27, 2009
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Aug. 08, 2008	Aug. 07, 2009
BILOG Antenna SCHWARZBECK	VULB9168	9168-156	Apr. 25, 2008	Apr. 24, 2009
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 07, 2008	Jan. 06, 2009
Preamplifier Agilent	8449B	3008A01911	Sep. 10, 2008	Sep. 09, 2009
Preamplifier Agilent	8447D	2944A10638	Dec. 26, 2008	Dec. 25, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218190/4 231241/4	May 20, 2008	May 19, 2009
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Aug. 09, 2008	Aug. 08, 2009
Software	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn Table Controller EMCO	2090	NA	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 9.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 460141.
 5. The IC Site Registration No. is IC 7450F-4.



A D T

Frequency below 1GHz

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
ROHDE & SCHWARZ TEST RECEIVER	ESCI	100412	Jul. 22, 2008	Jul. 21, 2009
SCHAFFENR BILOG Antenna	CBL6111D	21872	Apr. 29, 2008	Apr. 28, 2009
CT Turn Table	TT100	NA	NA	NA
CT Tower	AT100	NA	NA	NA
Software	ADT_Radiated _V7.6.15.9.2	NA	NA	NA
ADT RF Switches BOX	EM-H-01-1	1002	Aug. 19, 2008	Aug. 18, 2009
TIMES RF cable	LMR-600	CABLE-ST5-01	Aug. 19, 2008	Aug. 18, 2009

- NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Open Site No. 5.
3. The VCCI Site Registration No. R-1039.
4. The Industry Canada Reference No. IC 7450E-5.



4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber and a 10 meters open area site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 1KHz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD


No deviation.

4.1.5 TEST SETUP

Frequency above 1GHz

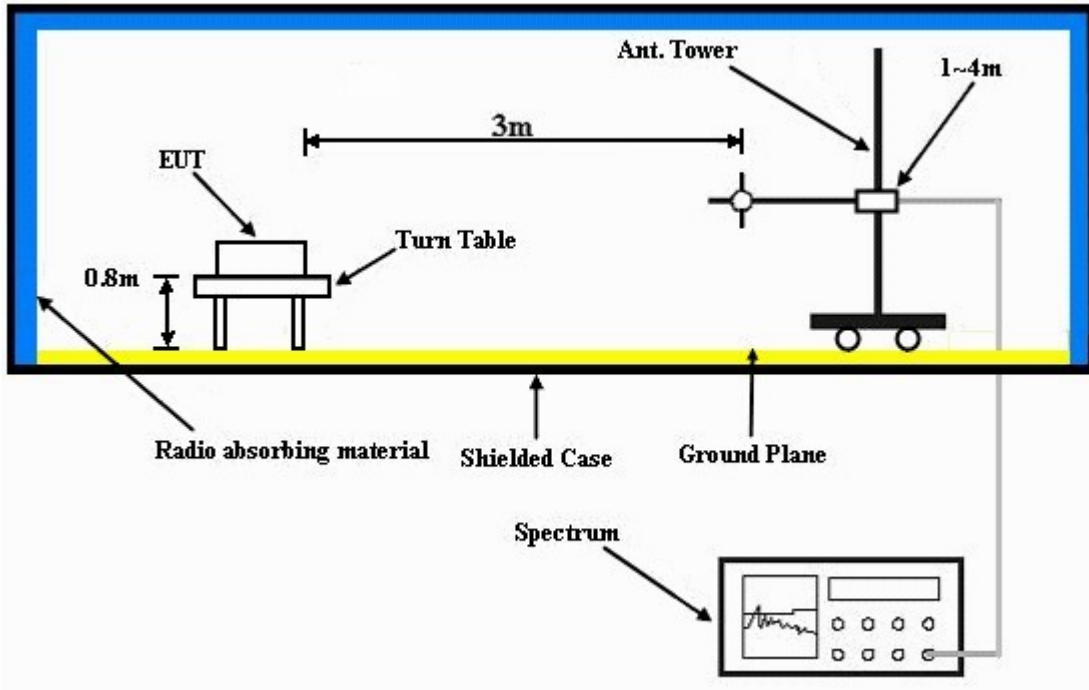

Frequency below 1GHz

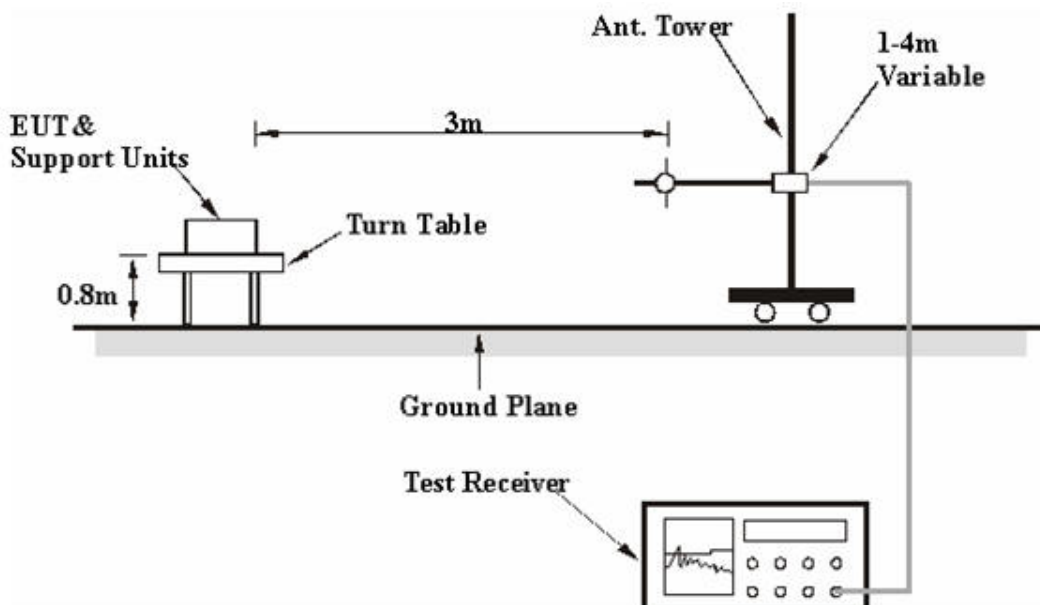

For the actual test configuration, please refer to the attached file (Test Setup Photo).



A D T

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Prepared two notebook systems outside of testing area to act as communication partners.
- c. The communication partners connected with EUT via RJ45 UTP cables and run a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- d. The communication partner sent data to EUT by command "PING".



A D T

4.1.7 TEST RESULTS

802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 998hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.36 PK	74.00	-12.64	1.36 H	282	28.28	33.08
2	2390.00	50.92 AV	54.00	-3.08	1.36 H	282	17.84	33.08
3	*2412.00	115.82 PK			1.36 H	282	82.64	33.18
4	*2412.00	111.32 AV			1.36 H	282	78.14	33.18
5	#3216.00	59.57 PK	95.82	-36.25	1.12 H	279	24.01	35.56
6	#3216.00	57.92 AV	91.32	-33.40	1.12 H	279	22.36	35.56
7	4824.00	50.06 PK	74.00	-23.94	1.19 H	190	10.91	39.15
8	4824.00	40.92 AV	54.00	-13.08	1.19 H	190	1.77	39.15
9	#7236.00	57.83 PK	95.82	-37.99	1.12 H	188	12.53	45.30
10	#7236.00	48.20 AV	91.32	-43.12	1.12 H	188	2.90	45.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.02 PK	74.00	-13.98	1.40 V	126	26.94	33.08
2	2390.00	49.25 AV	54.00	-4.75	1.40 V	126	16.17	33.08
3	*2412.00	111.56 PK			1.40 V	126	78.38	33.18
4	*2412.00	106.95 AV			1.40 V	126	73.77	33.18
5	#3216.00	57.53 PK	91.56	-34.03	1.15 V	270	21.97	35.56
6	#3216.00	55.69 AV	86.95	-31.26	1.15 V	270	20.13	35.56
7	4824.00	51.14 PK	74.00	-22.86	1.39 V	0	11.99	39.15
8	4824.00	44.12 AV	54.00	-9.88	1.39 V	0	4.97	39.15
9	#7236.00	60.50 PK	91.56	-31.06	1.05 V	11	15.20	45.30
10	#7236.00	52.75 AV	86.95	-34.20	1.05 V	11	7.45	45.30

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * ": Fundamental frequency.
 6. "#": The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 998hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	115.63 PK			1.33 H	280	82.35	33.28
2	*2437.00	110.89 AV			1.33 H	280	77.61	33.28
3	#3249.00	54.62 PK	95.63	-41.01	1.00 H	190	19.08	35.54
4	#3249.00	52.61 AV	90.89	-38.28	1.00 H	190	17.07	35.54
5	4874.00	49.27 PK	74.00	-24.73	1.00 H	184	10.12	39.14
6	4874.00	42.65 AV	54.00	-11.35	1.00 H	184	3.50	39.14
7	7311.00	56.59 PK	74.00	-17.41	1.07 H	187	11.06	45.53
8	7311.00	46.61 AV	54.00	-7.39	1.07 H	187	1.08	45.53
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	110.96 PK			1.25 V	229	77.68	33.28
2	*2437.00	106.52 AV			1.25 V	229	73.24	33.28
3	#3249.00	55.11 PK	90.96	-35.85	1.29 V	5	19.57	35.54
4	#3249.00	52.78 AV	86.52	-33.74	1.29 V	5	17.24	35.54
5	4874.00	51.00 PK	74.00	-23.00	1.38 V	2	11.85	39.14
6	4874.00	45.76 AV	54.00	-8.24	1.38 V	2	6.61	39.14
7	7311.00	60.00 PK	74.00	-14.00	1.31 V	360	14.47	45.53
8	7311.00	52.50 AV	54.00	-1.50	1.31 V	360	6.97	45.53

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#“: The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 998hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	115.59 PK			1.28 H	304	82.21	33.38
2	*2462.00	111.03 AV			1.28 H	304	77.65	33.38
3	2483.50	59.54 PK	74.00	-14.46	1.33 H	280	26.08	33.46
4	2483.50	48.54 AV	54.00	-5.46	1.33 H	280	15.08	33.46
5	#3282.00	53.51 PK	95.59	-42.08	1.00 H	61	18.00	35.51
6	#3282.00	50.58 AV	91.03	-40.45	1.00 H	61	15.07	35.51
7	4924.00	48.64 PK	74.00	-25.36	1.08 H	185	9.28	39.35
8	4924.00	40.60 AV	54.00	-13.40	1.08 H	185	1.24	39.35
9	7386.00	54.91 PK	74.00	-19.09	1.48 H	216	9.16	45.76
10	7386.00	46.10 AV	54.00	-7.90	1.48 H	216	0.35	45.76
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.85 PK			1.13 V	158	78.47	33.38
2	*2462.00	107.23 AV			1.13 V	158	73.85	33.38
3	2483.50	60.29 PK	74.00	-13.71	1.13 V	158	26.83	33.46
4	2483.50	49.44 AV	54.00	-4.56	1.13 V	158	15.98	33.46
5	#3282.00	56.63 PK	91.85	-35.22	1.00 V	74	21.12	35.51
6	#3282.00	55.03 AV	87.23	-32.20	1.00 V	74	19.52	35.51
7	4924.00	52.01 PK	74.00	-21.99	1.08 V	23	12.65	39.35
8	4924.00	47.96 AV	54.00	-6.04	1.08 V	23	8.60	39.35
9	7386.00	58.60 PK	74.00	-15.40	1.64 V	322	12.85	45.76
10	7386.00	51.56 AV	54.00	-2.44	1.64 V	322	5.81	45.76

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#“: The radiated frequency is out the restricted band.



A D T

802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 998hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.19 PK	74.00	-4.81	1.34 H	285	36.11	33.08
2	2390.00	52.29 AV	54.00	-1.71	1.34 H	285	19.21	33.08
3	*2412.00	113.55 PK			1.37 H	281	80.37	33.18
4	*2412.00	103.30 AV			1.37 H	281	70.12	33.18
5	#3216.00	64.56 PK	93.55	-28.99	1.13 H	273	29.00	35.56
6	#3216.00	63.85 AV	83.30	-19.45	1.13 H	273	28.29	35.56
7	4824.00	46.33 PK	74.00	-27.67	1.00 H	0	7.18	39.15
8	4824.00	33.22 AV	54.00	-20.78	1.00 H	0	-5.93	39.15
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.35 PK	74.00	-4.65	1.14 V	128	36.27	33.08
2	2390.00	51.46 AV	54.00	-2.54	1.14 V	128	18.38	33.08
3	*2412.00	111.35 PK			1.41 V	125	78.17	33.18
4	*2412.00	100.53 AV			1.41 V	125	67.35	33.18
5	#3216.00	59.93 PK	91.35	-31.42	1.39 V	125	24.37	35.56
6	#3216.00	58.75 AV	80.53	-21.78	1.39 V	125	23.19	35.56
7	4824.00	46.48 PK	74.00	-27.52	1.10 V	360	7.33	39.15
8	4824.00	33.68 AV	54.00	-20.32	1.10 V	360	-5.47	39.15

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”: The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 998hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	113.63 PK			1.28 H	299	80.35	33.28
2	*2437.00	103.48 AV			1.28 H	299	70.20	33.28
3	#3249.00	63.88 PK	93.63	-29.75	1.00 H	60	28.34	35.54
4	#3249.00	62.88 AV	83.48	-20.60	1.00 H	60	27.34	35.54
5	4874.00	46.49 PK	74.00	-27.51	1.28 H	300	7.34	39.14
6	4874.00	33.28 AV	54.00	-20.72	1.28 H	300	-5.87	39.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	111.62 PK			1.14 V	127	78.34	33.28
2	*2437.00	101.12 AV			1.14 V	127	67.84	33.28
3	#3249.00	63.76 PK	91.62	-27.86	1.02 V	74	28.22	35.54
4	#3249.00	62.94 AV	81.12	-18.18	1.02 V	74	27.40	35.54
5	4874.00	46.79 PK	74.00	-27.21	1.02 V	0	7.64	39.14
6	4874.00	33.63 AV	54.00	-20.37	1.02 V	0	-5.52	39.14

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#“: The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 998hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	113.14 PK			1.28 H	300	79.76	33.38
2	*2462.00	103.07 AV			1.28 H	300	69.69	33.38
3	2483.50	72.85 PK	74.00	-1.15	1.28 H	304	39.39	33.46
4	2483.50	51.82 AV	54.00	-2.18	1.28 H	304	18.36	33.46
5	#3282.00	55.21 PK	93.14	-37.93	1.15 H	61	19.70	35.51
6	#3282.00	52.97 AV	83.07	-30.10	1.15 H	61	17.46	35.51
7	4924.00	47.02 PK	74.00	-26.98	1.28 H	360	7.66	39.35
8	4924.00	34.01 AV	54.00	-19.99	1.28 H	360	-5.35	39.35
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.04 PK			1.19 V	157	77.66	33.38
2	*2462.00	100.17 AV			1.19 V	157	66.79	33.38
3	2483.50	72.92 PK	74.00	-1.08	1.19 V	158	39.46	33.46
4	2483.50	52.33 AV	54.00	-1.67	1.19 V	158	18.87	33.46
5	#3282.00	58.60 PK	91.04	-32.44	1.00 V	77	23.09	35.51
6	#3282.00	57.69 AV	80.17	-22.48	1.00 V	77	22.18	35.51
7	4924.00	46.85 PK	74.00	-27.15	1.00 V	360	7.49	39.35
8	4924.00	33.98 AV	54.00	-20.02	1.00 V	360	-5.38	39.35

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#“: The radiated frequency is out the restricted band.



A D T

DRAFT 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 998hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.85 PK	74.00	-4.15	1.35 H	296	36.77	33.08
2	2390.00	51.51 AV	54.00	-2.49	1.35 H	296	18.43	33.08
3	*2412.00	112.50 PK			1.35 H	278	79.32	33.18
4	*2412.00	102.29 AV			1.35 H	278	69.11	33.18
5	#3216.00	59.50 PK	92.50	-33.00	1.12 H	274	23.94	35.56
6	#3216.00	58.35 AV	82.29	-23.94	1.12 H	274	22.79	35.56
7	4824.00	46.72 PK	74.00	-27.28	1.35 H	360	7.57	39.15
8	4824.00	33.88 AV	54.00	-20.12	1.35 H	360	-5.27	39.15
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.19 PK	74.00	-2.81	1.16 V	124	38.11	33.08
2	2390.00	51.25 AV	54.00	-2.75	1.16 V	124	18.17	33.08
3	*2412.00	110.11 PK			1.40 V	128	76.93	33.18
4	*2412.00	99.17 AV			1.40 V	128	65.99	33.18
5	#3216.00	56.39 PK	90.11	-33.72	1.16 V	270	20.83	35.56
6	#3216.00	54.51 AV	79.17	-24.66	1.16 V	270	18.95	35.56
7	4824.00	46.49 PK	74.00	-27.51	1.16 V	360	7.34	39.15
8	4824.00	33.62 AV	54.00	-20.38	1.16 V	360	-5.53	39.15

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 998hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	113.74 PK			1.32 H	283	80.46	33.28
2	*2437.00	103.32 AV			1.32 H	283	70.04	33.28
3	#3249.00	58.16 PK	93.74	-35.58	1.00 H	60	22.62	35.54
4	#3249.00	56.65 AV	83.32	-26.67	1.00 H	60	21.11	35.54
5	4874.00	46.59 PK	74.00	-27.41	1.32 H	360	7.44	39.14
6	4874.00	33.74 AV	54.00	-20.26	1.32 H	360	-5.41	39.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	111.03 PK			1.15 V	128	77.75	33.28
2	*2437.00	100.15 AV			1.15 V	128	66.87	33.28
3	#3249.00	57.57 PK	91.03	-33.46	1.04 V	72	22.03	35.54
4	#3249.00	57.04 AV	80.15	-23.11	1.04 V	72	21.50	35.54
5	4874.00	46.50 PK	74.00	-27.50	1.04 V	0	7.35	39.14
6	4874.00	33.64 AV	54.00	-20.36	1.04 V	0	-5.51	39.14

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 998hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	112.62 PK			1.31 H	307	79.24	33.38
2	*2462.00	102.47 AV			1.31 H	307	69.09	33.38
3	2483.50	72.92 PK	74.00	-1.08	1.29 H	311	39.46	33.46
4	2483.50	51.60 AV	54.00	-2.40	1.29 H	311	18.14	33.46
5	#3282.00	55.43 PK	92.62	-37.19	1.14 H	62	19.92	35.51
6	#3282.00	53.20 AV	82.47	-29.27	1.14 H	62	17.69	35.51
7	4924.00	47.02 PK	74.00	-26.98	1.29 H	360	7.66	39.35
8	4924.00	34.13 AV	54.00	-19.87	1.29 H	360	-5.23	39.35
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.35 PK			1.35 V	126	76.97	33.38
2	*2462.00	99.47 AV			1.35 V	126	66.09	33.38
3	2483.50	71.31 PK	74.00	-2.69	1.39 V	127	37.85	33.46
4	2483.50	52.69 AV	54.00	-1.31	1.39 V	127	19.23	33.46
5	#3282.00	58.99 PK	90.35	-31.36	1.00 V	75	23.48	35.51
6	#3282.00	57.79 AV	79.47	-21.68	1.00 V	75	22.28	35.51
7	4924.00	47.26 PK	74.00	-26.74	1.00 V	0	7.90	39.35
8	4924.00	33.85 AV	54.00	-20.15	1.00 V	0	-5.51	39.35

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#“: The radiated frequency is out the restricted band.



A D T

DRAFT 802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 998hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.54 PK	74.00	-1.46	1.36 H	281	39.46	33.08
2	2390.00	52.59 AV	54.00	-1.41	1.36 H	281	19.51	33.08
3	*2422.00	107.56 PK			1.34 H	281	74.34	33.22
4	*2422.00	97.00 AV			1.34 H	281	63.78	33.22
5	#3229.00	57.90 PK	87.56	-29.66	1.00 H	57	22.35	35.55
6	#3229.00	56.47 AV	77.00	-20.53	1.00 H	57	20.92	35.55
7	4844.00	46.82 PK	74.00	-27.18	1.00 H	360	7.68	39.15
8	4844.00	33.26 AV	54.00	-20.74	1.00 H	360	-5.88	39.15
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.26 PK	74.00	-1.74	1.45 V	127	39.18	33.08
2	2390.00	52.85 AV	54.00	-1.15	1.45 V	127	19.77	33.08
3	*2422.00	104.80 PK			1.42 V	127	71.58	33.22
4	*2422.00	94.81 AV			1.42 V	127	61.59	33.22
5	#3229.00	56.60 PK	84.80	-28.20	1.05 V	71	21.05	35.55
6	#3229.00	54.68 AV	74.81	-20.13	1.05 V	71	19.13	35.55
7	4844.00	46.99 PK	74.00	-27.01	1.05 V	0	7.85	39.15
8	4844.00	33.57 AV	54.00	-20.43	1.05 V	0	-5.57	39.15

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 998hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.64 PK	74.00	-10.36	1.36 H	292	30.56	33.08
2	2390.00	48.36 AV	54.00	-5.64	1.36 H	292	15.28	33.08
3	*2437.00	108.40 PK			1.33 H	285	75.12	33.28
4	*2437.00	97.71 AV			1.33 H	285	64.43	33.28
5	2483.50	57.77 PK	74.00	-16.23	1.36 H	192	24.31	33.46
6	2483.50	48.27 AV	54.00	-5.73	1.36 H	192	14.81	33.46
7	#3249.00	54.79 PK	88.40	-33.61	1.45 H	189	19.25	35.54
8	#3249.00	52.04 AV	77.71	-25.67	1.45 H	189	16.50	35.54
9	4874.00	46.13 PK	74.00	-27.87	1.29 H	180	6.98	39.14
10	4874.00	33.55 AV	54.00	-20.45	1.29 H	180	-5.60	39.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	105.27 PK			1.14 V	126	71.99	33.28
2	*2437.00	94.84 AV			1.14 V	126	61.56	33.28
3	#3249.00	57.20 PK	85.27	-28.07	1.29 V	4	21.66	35.54
4	#3249.00	55.67 AV	74.84	-19.17	1.29 V	4	20.13	35.54
5	4874.00	46.79 PK	74.00	-27.21	1.29 V	0	7.64	39.14
6	4874.00	33.61 AV	54.00	-20.39	1.29 V	0	-5.54	39.14

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#“: The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 998hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	106.72 PK			1.30 H	279	73.38	33.34
2	*2452.00	96.21 AV			1.30 H	279	62.87	33.34
3	2483.50	71.84 PK	74.00	-2.16	1.32 H	279	38.38	33.46
4	2483.50	52.60 AV	54.00	-1.40	1.32 H	279	19.14	33.46
5	#3269.00	54.81 PK	86.72	-31.91	1.00 H	62	19.28	35.52
6	#3269.00	52.78 AV	76.21	-23.43	1.00 H	62	17.25	35.52
7	4904.00	47.19 PK	74.00	-26.81	1.32 H	360	8.01	39.18
8	4904.00	33.93 AV	54.00	-20.07	1.32 H	360	-5.25	39.18
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	104.04 PK			1.17 V	160	70.70	33.34
2	*2452.00	94.05 AV			1.17 V	160	60.71	33.34
3	2483.50	69.11 PK	74.00	-4.89	1.17 V	159	35.65	33.46
4	2483.50	52.60 AV	54.00	-1.40	1.17 V	159	19.14	33.46
5	#3269.00	56.83 PK	84.04	-27.21	1.00 V	79	21.30	35.52
6	#3269.00	55.83 AV	74.05	-18.22	1.00 V	79	20.30	35.52
7	4904.00	46.83 PK	74.00	-27.17	1.00 V	360	7.65	39.18
8	4904.00	33.87 AV	54.00	-20.13	1.00 V	360	-5.31	39.18

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#“: The radiated frequency is out the restricted band.



A D T

BELOW 1GHz WORST-CASE DATA : 802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	15deg. C, 17%RH 999hPa	TEST MODE	A
TESTED BY	Vincent Lin		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	100.00	37.94 QP	43.50	-5.56	1.52 H	164	27.47	10.47
2	340.01	40.51 QP	46.00	-5.49	2.94 H	349	24.21	16.30
3	400.01	35.94 QP	46.00	-10.06	1.94 H	251	17.74	18.20
4	432.31	38.42 QP	46.00	-7.58	1.76 H	76	19.43	18.99
5	650.01	37.85 QP	46.00	-8.15	2.05 H	194	12.95	24.90
6	666.68	39.45 QP	46.00	-6.55	2.56 H	142	14.40	25.05
7	680.01	44.76 QP	46.00	-1.24	2.25 H	261	19.60	25.16
8	750.01	36.85 QP	46.00	-9.15	1.74 H	61	10.58	26.27
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	83.61	34.73 QP	40.00	-5.27	1.00 V	174	25.65	9.08
2	125.00	33.73 QP	43.50	-9.77	1.00 V	261	21.06	12.67
3	225.01	34.91 QP	46.00	-11.09	1.00 V	185	22.41	12.50
4	340.01	33.95 QP	46.00	-12.05	1.00 V	53	17.65	16.30
5	400.00	41.55 QP	46.00	-4.45	3.15 V	258	23.35	18.20
6	500.01	39.15 QP	46.00	-6.85	1.86 V	49	18.49	20.66
7	525.02	42.91 QP	46.00	-3.09	1.73 V	173	21.34	21.57
8	679.99	42.14 QP	46.00	-3.86	1.64 V	91	16.98	25.16
9	800.01	37.62 QP	46.00	-8.38	1.00 V	314	10.40	27.22

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	15deg. C, 17%RH 999hPa	TEST MODE	B
TESTED BY	Vincent Lin		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	100.00	36.58 QP	43.50	-6.92	1.26 H	99	26.11	10.47
2	155.36	32.63 QP	43.50	-10.87	1.00 H	59	19.84	12.79
3	340.00	40.02 QP	46.00	-5.98	2.06 H	229	23.72	16.30
4	400.01	37.15 QP	46.00	-8.85	1.87 H	274	18.95	18.20
5	650.01	37.59 QP	46.00	-8.41	2.14 H	167	12.69	24.90
6	666.67	39.62 QP	46.00	-6.38	2.35 H	116	14.57	25.05
7	680.01	44.68 QP	46.00	-1.32	2.24 H	93	19.52	25.16
8	800.00	35.92 QP	46.00	-10.08	1.86 H	0	8.70	27.22
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	74.81	32.85 QP	40.00	-7.15	1.00 V	200	24.79	8.06
2	340.00	35.63 QP	46.00	-10.37	2.35 V	119	19.33	16.30
3	400.01	41.73 QP	46.00	-4.27	1.69 V	201	23.53	18.20
4	525.01	44.09 QP	46.00	-1.91	2.22 V	342	22.52	21.57
5	575.00	39.61 QP	46.00	-6.39	1.42 V	48	16.25	23.36
6	680.00	43.50 QP	46.00	-2.50	1.25 V	235	18.34	25.16
7	800.00	38.05 QP	46.00	-7.95	1.11 V	117	10.83	27.22

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 19, 2008	Nov. 18, 2009
RF signal cable Woken	5D-FB	Cable-HYC01-01	Jan. 04, 2008	Jan. 03, 2009
LISN ROHDE & SCHWARZ	ESH3-Z5	100312	Jun. 13, 2008	Jun. 12, 2009
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Dec. 04, 2008	Dec. 03, 2009
Software ADT	ADT_Cond_ V7.3.6	NA	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 1.
3. The VCCI Site Registration No. is C-2040.



A D T

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

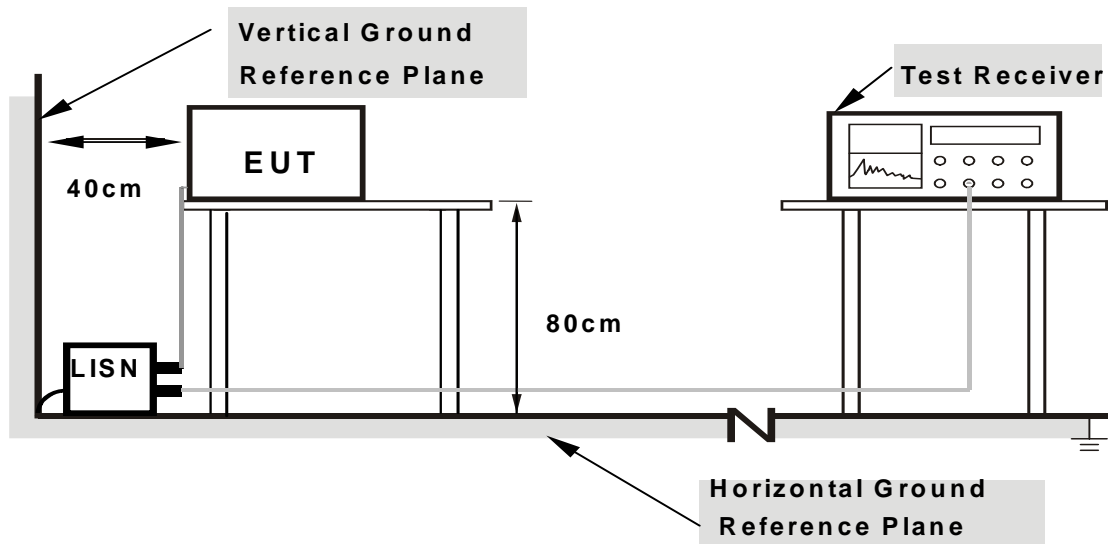

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.




4.2.7 TEST RESULTS

CONDUCTED WORST-CASE DATA : 802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH, 1021hPa	TEST MODE	A
TESTED BY	Antony Lee		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.150	0.13	47.03	-	47.16	-	66.00
2	0.185	0.13	41.10	-	41.23	-	64.25	54.25	-23.02	-
3	0.353	0.14	33.48	-	33.62	-	58.89	48.89	-25.27	-
4	1.875	0.22	25.40	-	25.62	-	56.00	46.00	-30.38	-
5	3.133	0.33	26.52	-	26.85	-	56.00	46.00	-29.15	-
6	21.176	1.18	35.42	-	36.60	-	60.00	50.00	-23.40	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

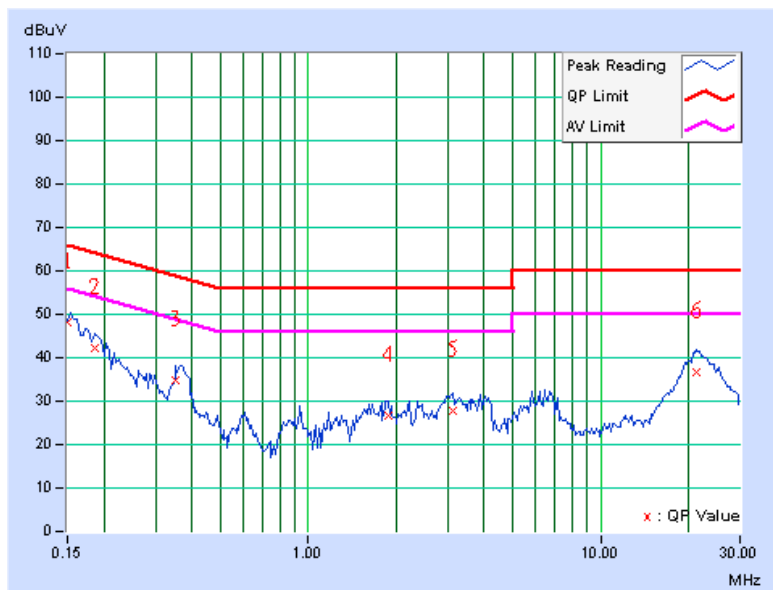

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH, 1021hPa	TEST MODE	A
TESTED BY	Antony Lee		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.14	46.95	-	47.09	-	66.00	56.00	-18.91	-
2	0.189	0.15	40.49	-	40.64	-	64.08	54.08	-23.44	-
3	0.353	0.16	33.44	-	33.60	-	58.89	48.89	-25.29	-
4	0.779	0.19	26.01	-	26.20	-	56.00	46.00	-29.80	-
5	4.121	0.42	28.47	-	28.89	-	56.00	46.00	-27.11	-
6	21.066	0.97	34.16	-	35.13	-	60.00	50.00	-24.87	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

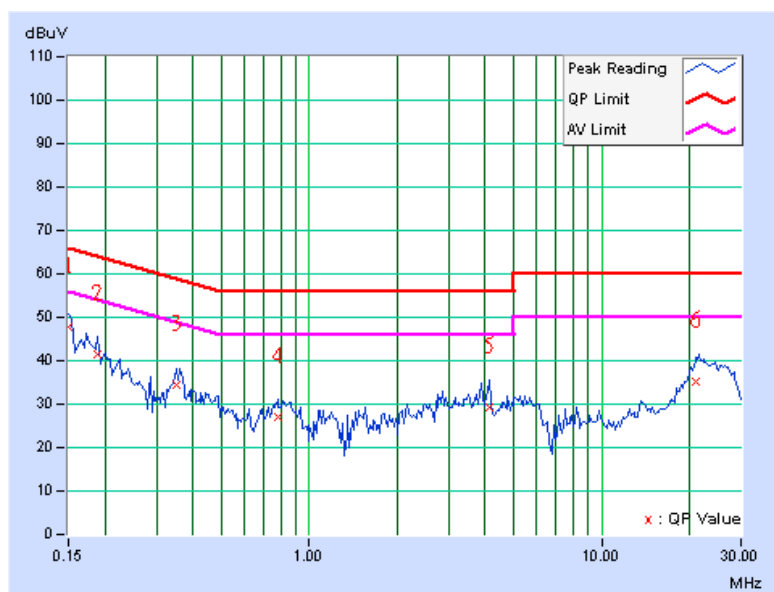

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH, 1021hPa	TEST MODE	B
TESTED BY	Antony Lee		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.13	50.91	-	51.04	-	65.58	55.58	-14.54	-
2	0.185	0.13	47.76	-	47.89	-	64.25	54.25	-16.36	-
3	0.232	0.13	41.80	-	41.93	-	62.38	52.38	-20.45	-
4	0.279	0.13	39.43	-	39.56	-	60.85	50.85	-21.28	-
5	0.564	0.15	40.94	-	41.09	-	56.00	46.00	-14.91	-
6	4.055	0.40	28.07	-	28.47	-	56.00	46.00	-27.53	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

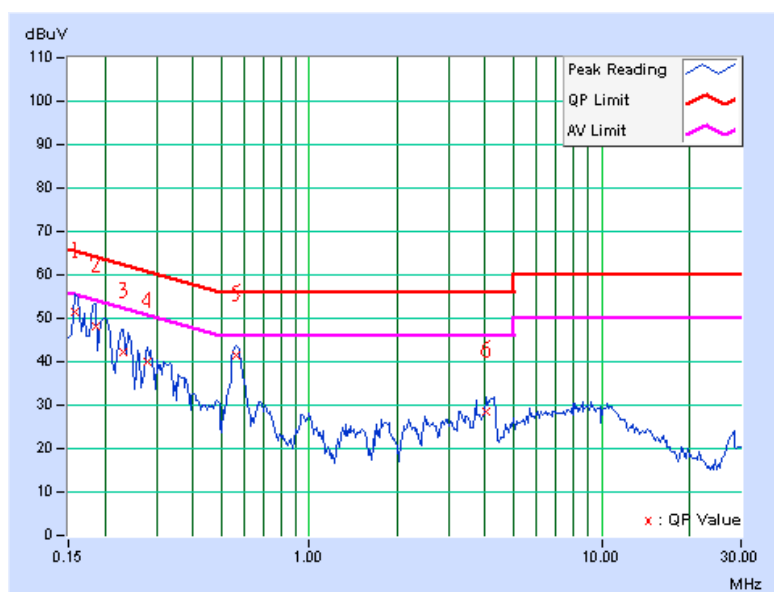

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH, 1021hPa	TEST MODE	B
TESTED BY	Antony Lee		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.14	50.58	-	50.72	-	66.00	56.00	-15.28	-
2	0.166	0.14	49.54	-	49.68	-	65.18	55.18	-15.49	-
3	0.185	0.15	47.49	-	47.64	-	64.25	54.25	-16.61	-
4	0.287	0.15	37.55	-	37.70	-	60.62	50.62	-22.91	-
5	0.564	0.17	38.52	-	38.69	-	56.00	46.00	-17.31	-
6	4.250	0.43	27.43	-	27.86	-	56.00	46.00	-28.14	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

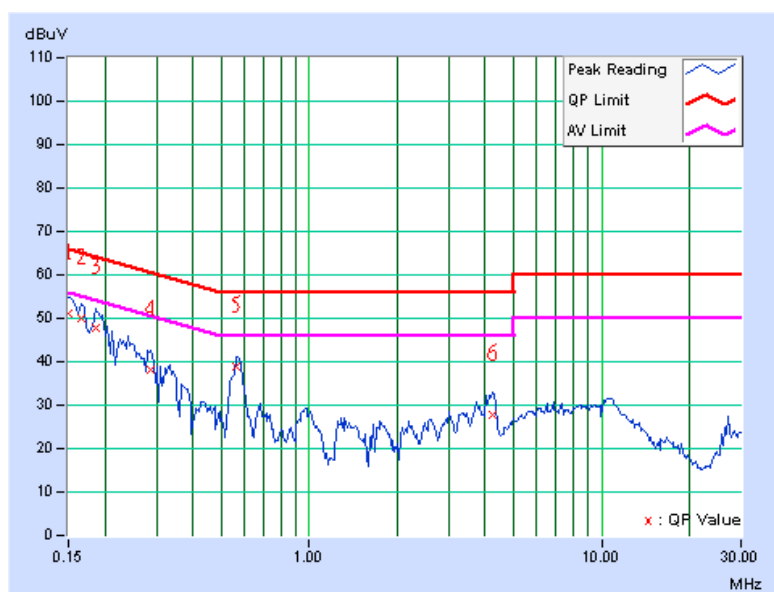



A D T

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100041	Apr. 22, 2008	Apr. 21, 2009

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP

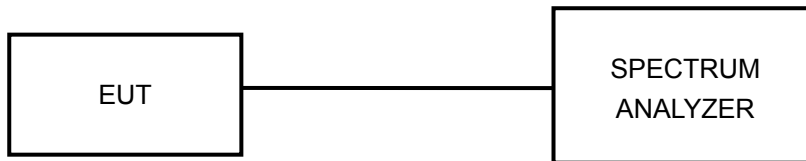

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T

4.3.7 TEST RESULTS

802.11b DSSS MODULATION


MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	18 deg.C, 63 %RH, 1021hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	11.18	12.09	0.5	PASS
6	2437	12.15	12.16	0.5	PASS
11	2462	12.15	12.10	0.5	PASS




A D T

FOR CHAIN 0: CH 1

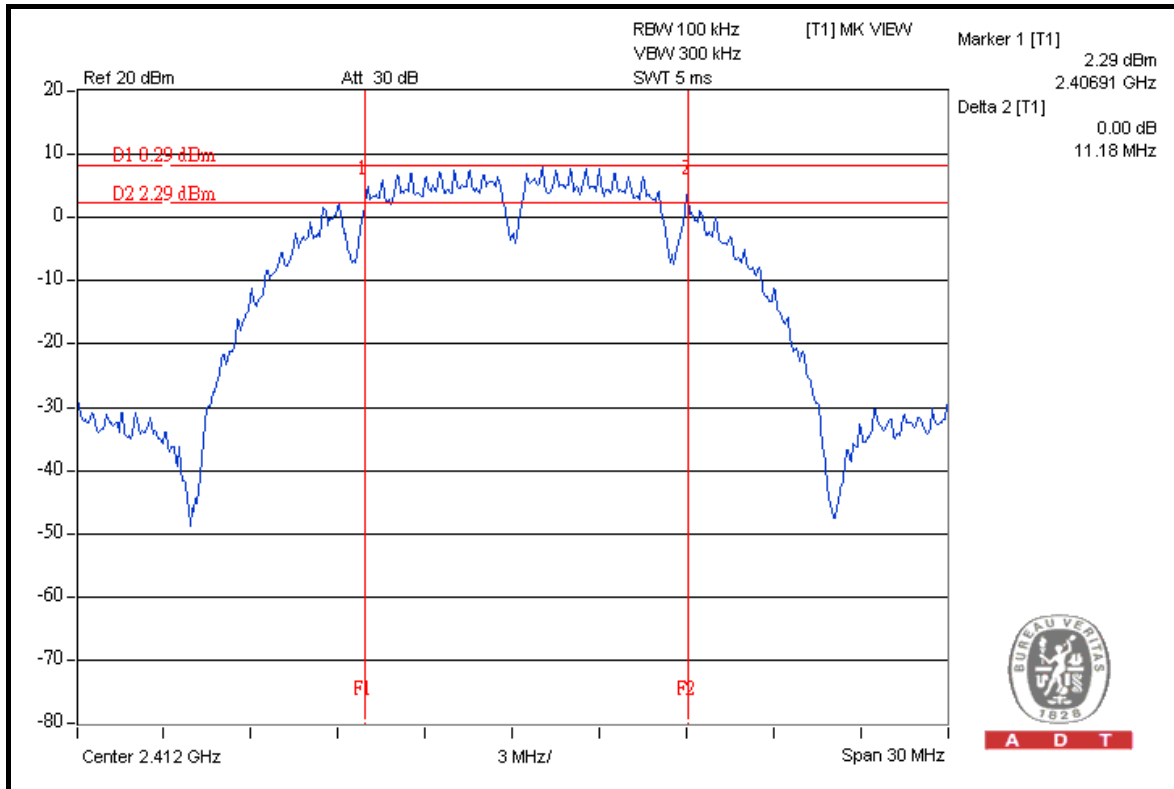


CH 6

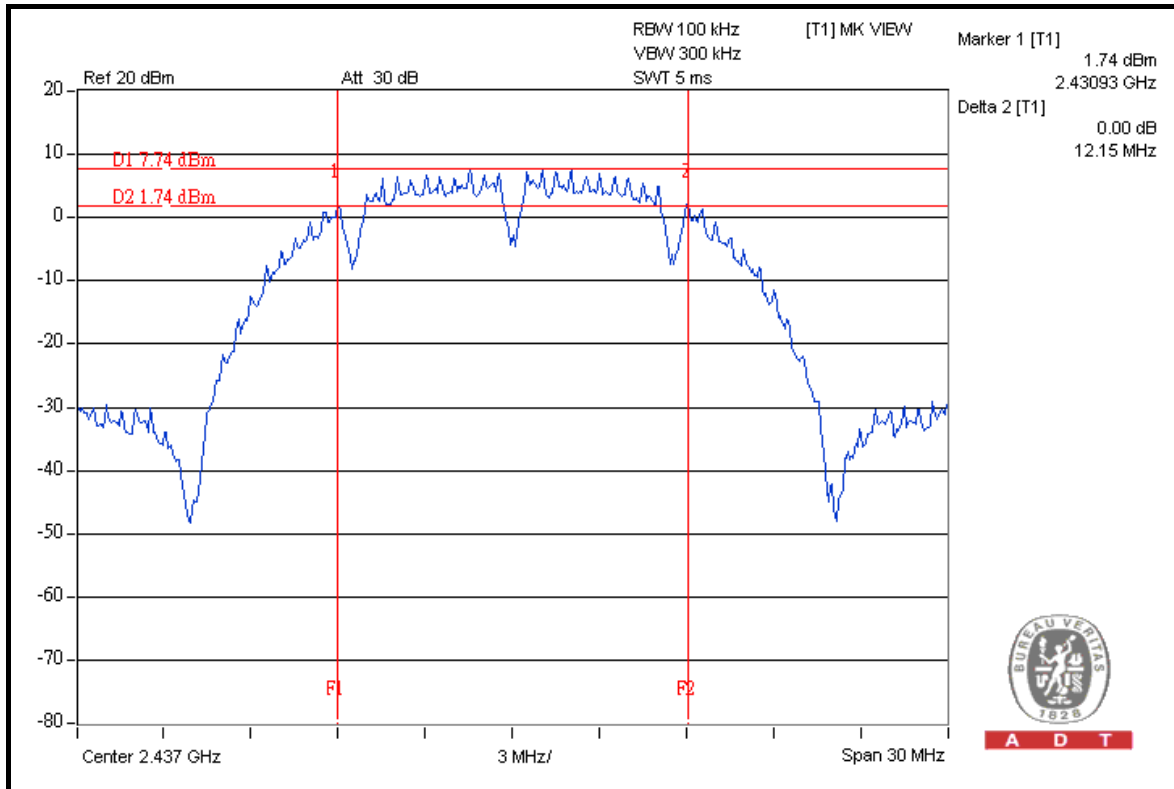




A D T

CH 11

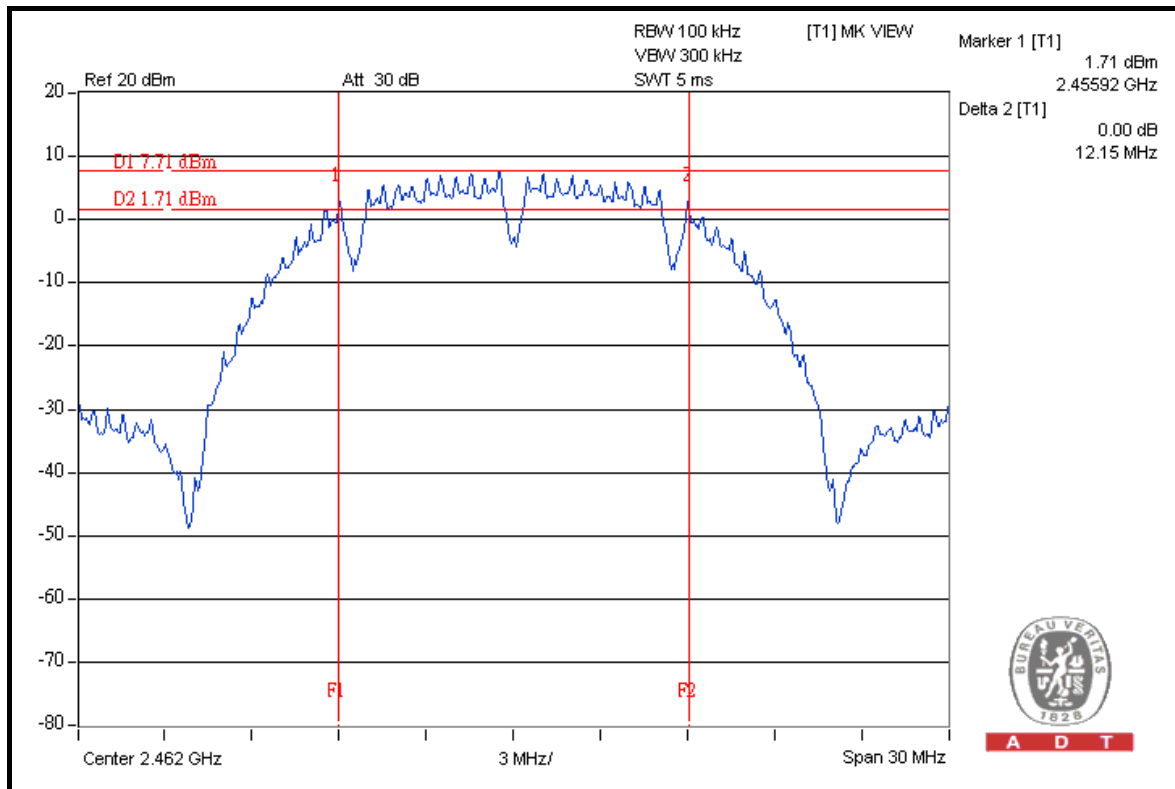

A D T

FOR CHAIN 1: CH 1

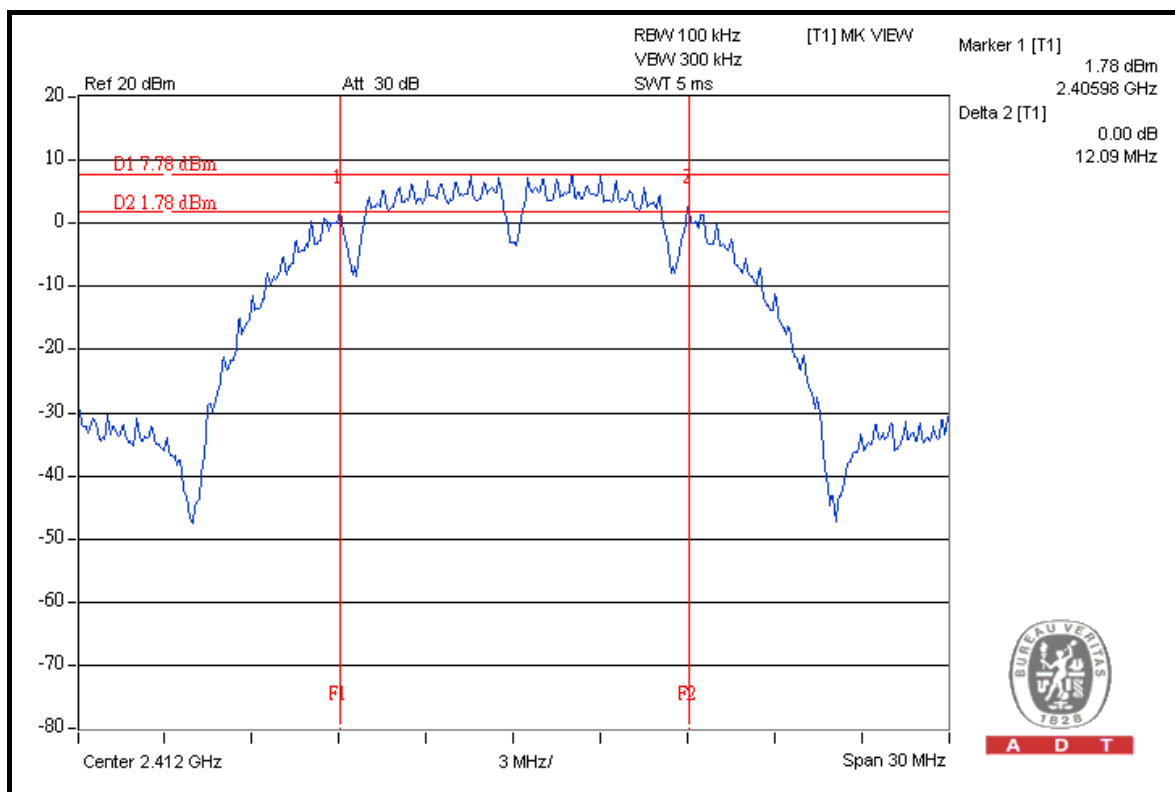


A D T




A D T

CH 6

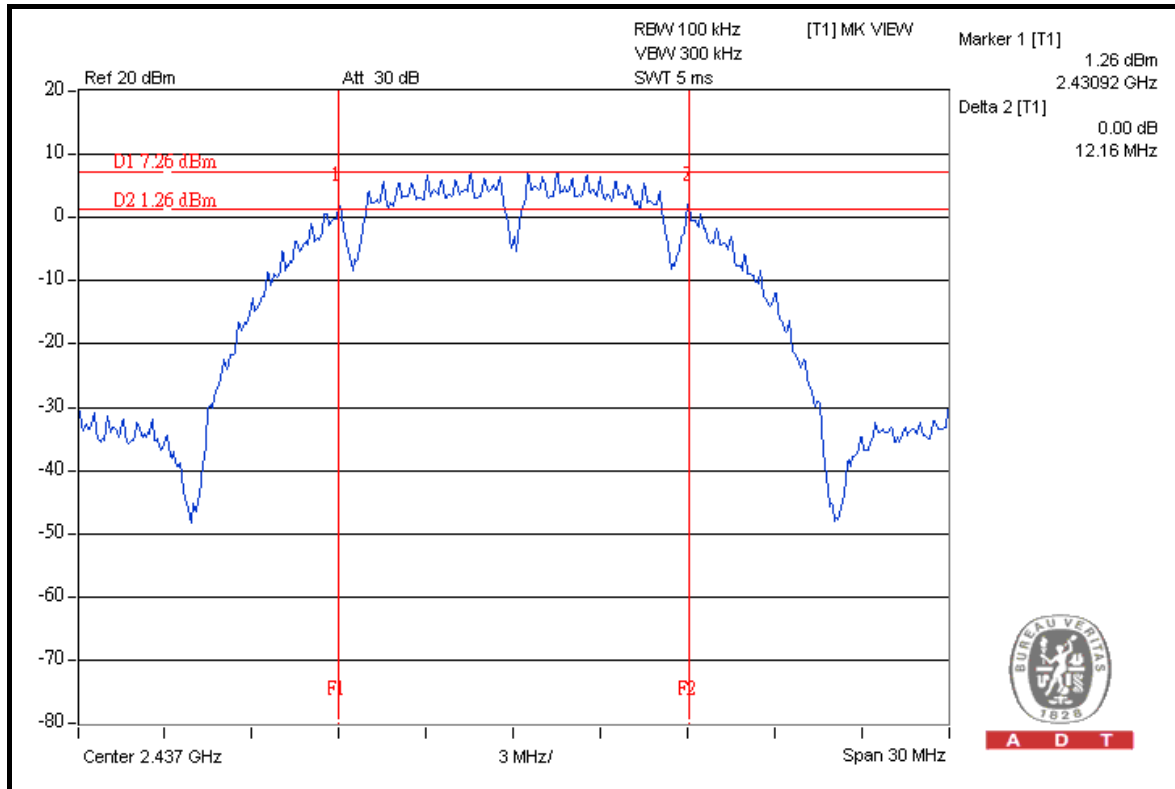

A D T

CH 11

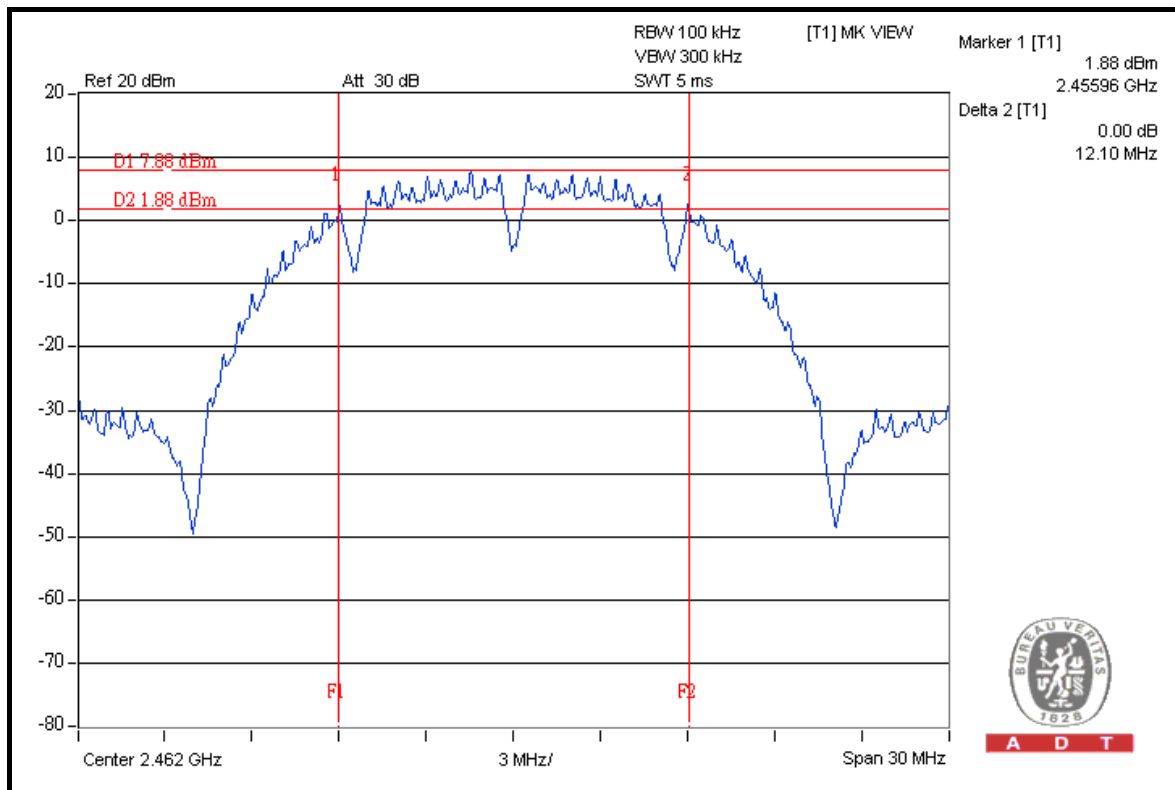

A D T



A D T

802.11g OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	18 deg.C, 63 %RH, 1021hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	16.42	16.47	0.5	PASS
6	2437	16.44	16.45	0.5	PASS
11	2462	16.42	16.46	10.5	PASS




A D T

FOR CHAIN 0: CH 1

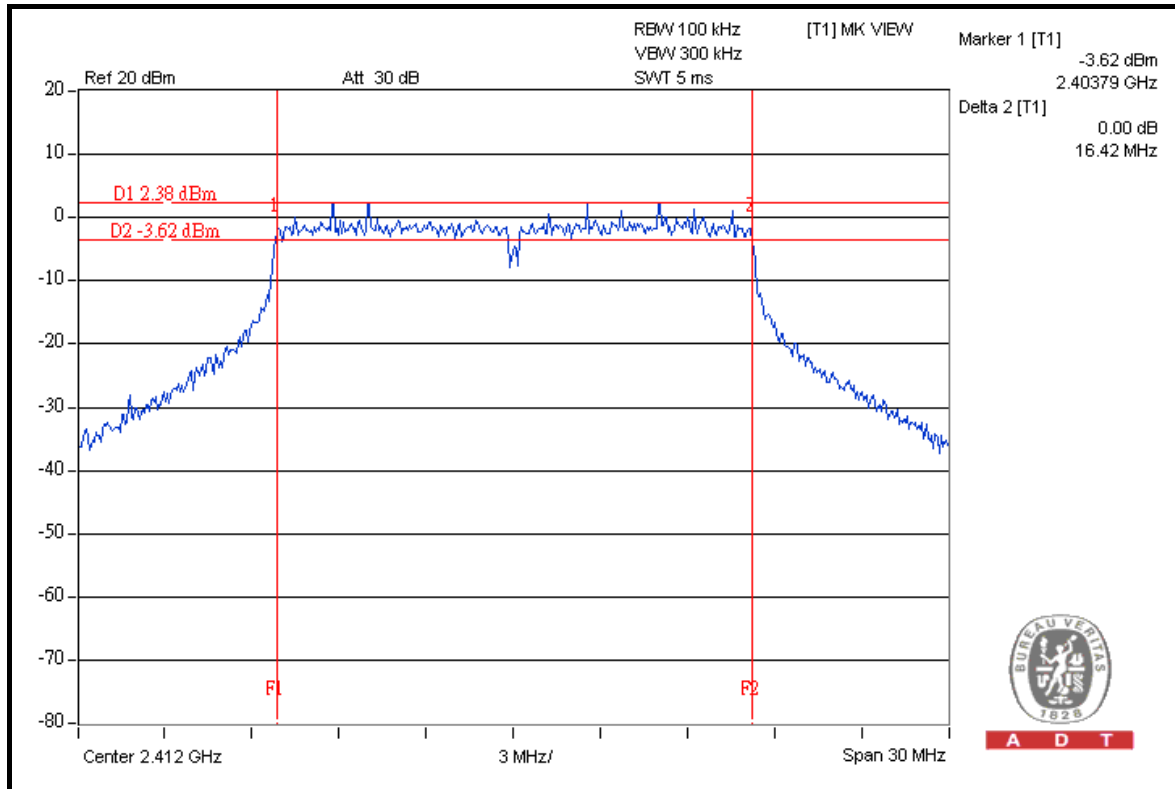


CH 6

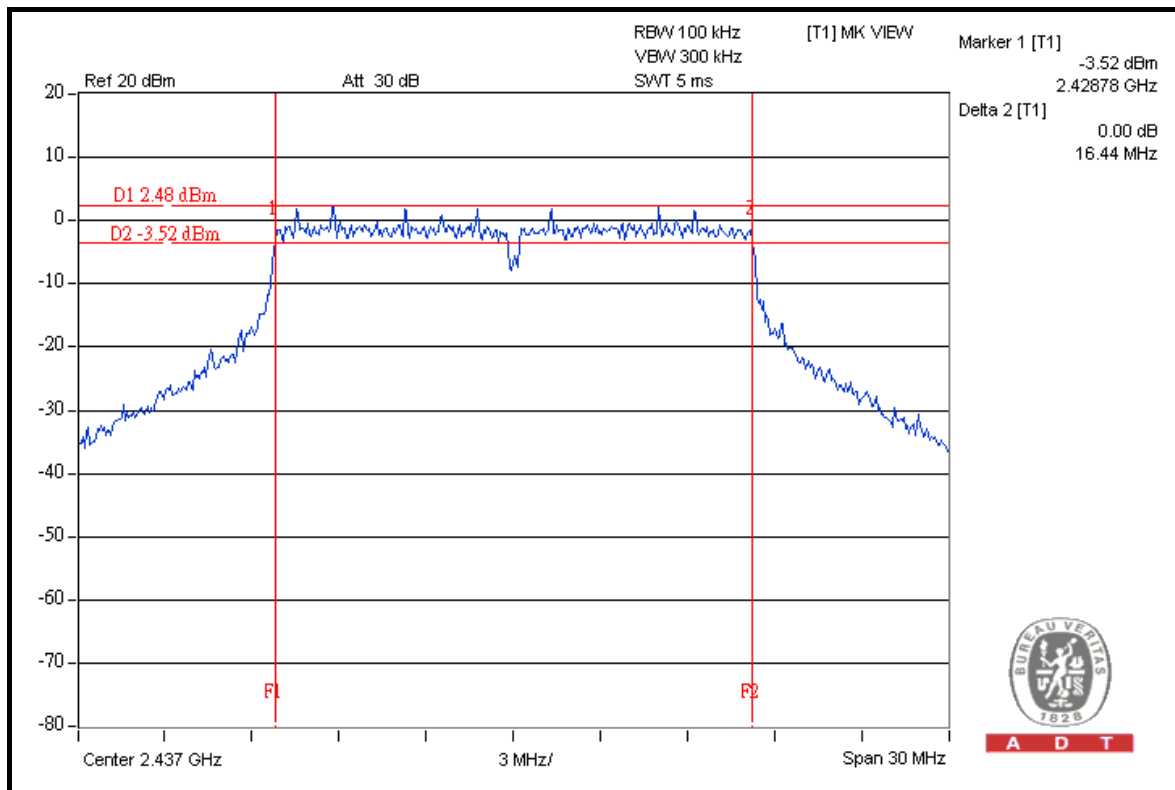




A D T

CH 11

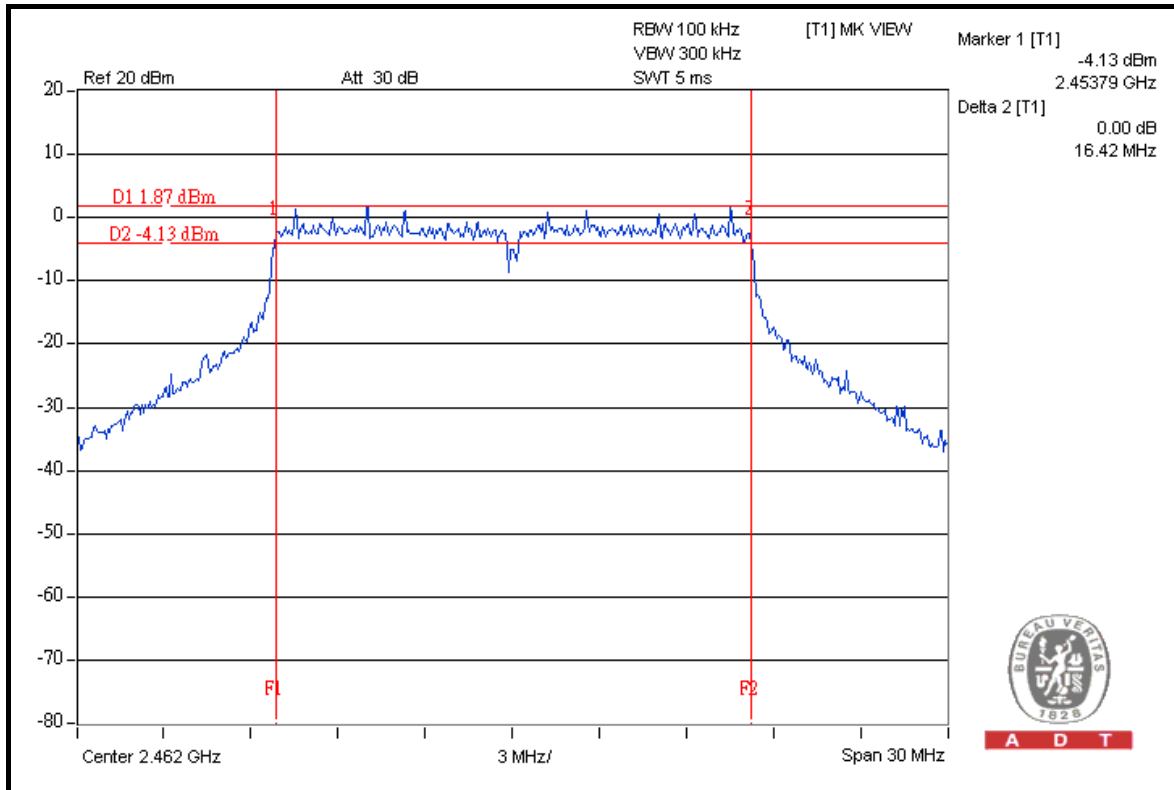

A D T

FOR CHAIN 1: CH 1

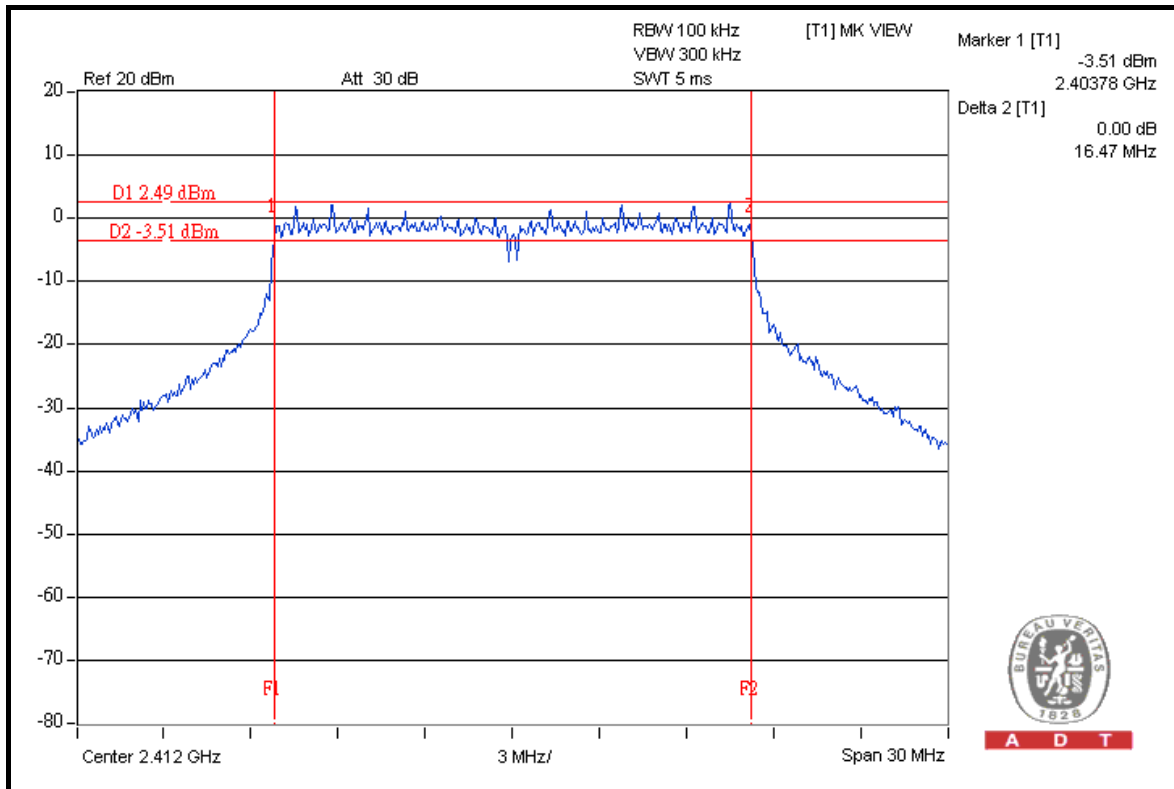


A D T




A D T

CH 6

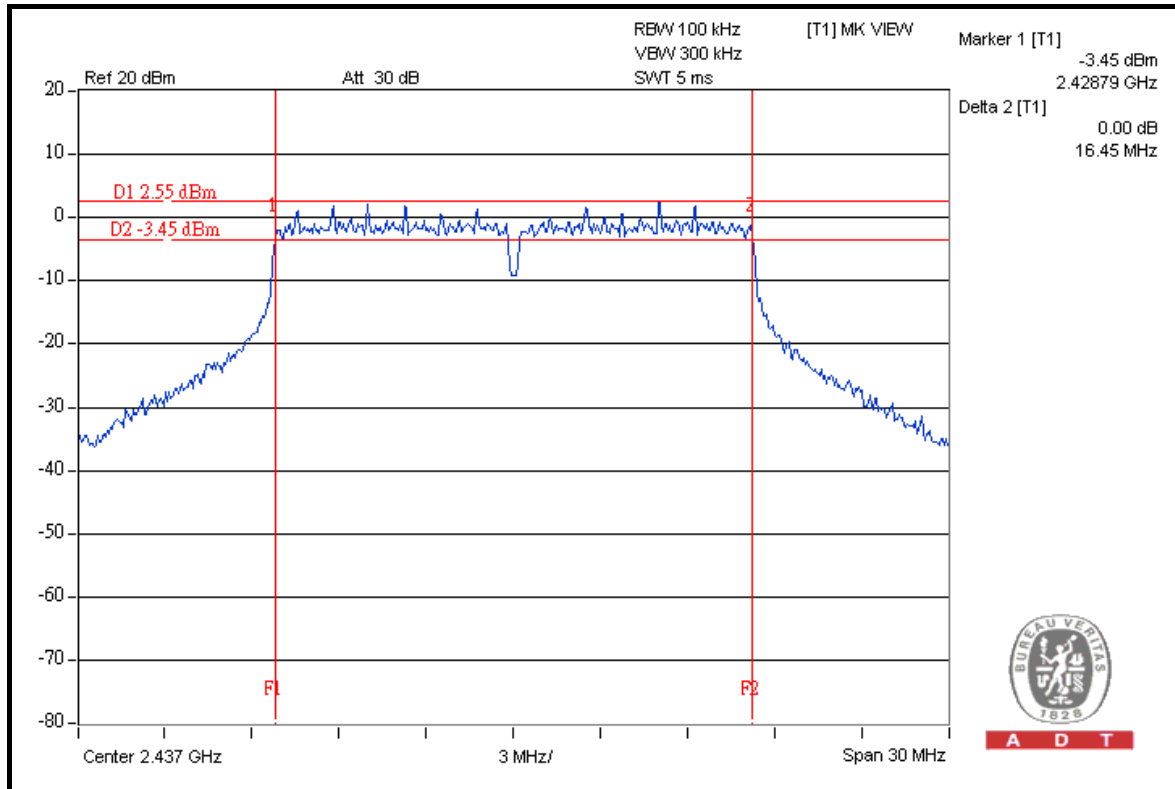

CH 11

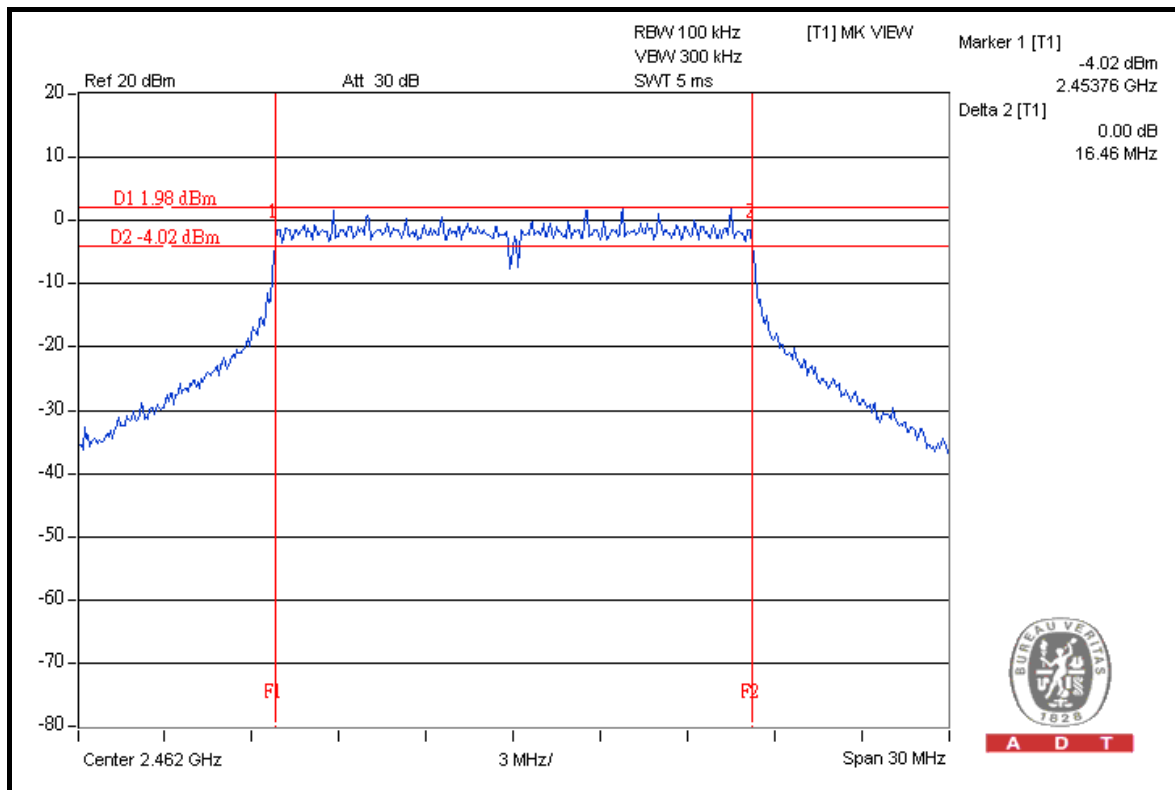



A D T

DRAFT 802.11n (20MHz) OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	7.2Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	18 deg.C, 63 %RH, 1021hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	17.73	17.69	0.5	PASS
6	2437	17.70	17.69	0.5	PASS
11	2462	17.70	17.66	0.5	PASS




A D T

FOR CHAIN 0: CH 1

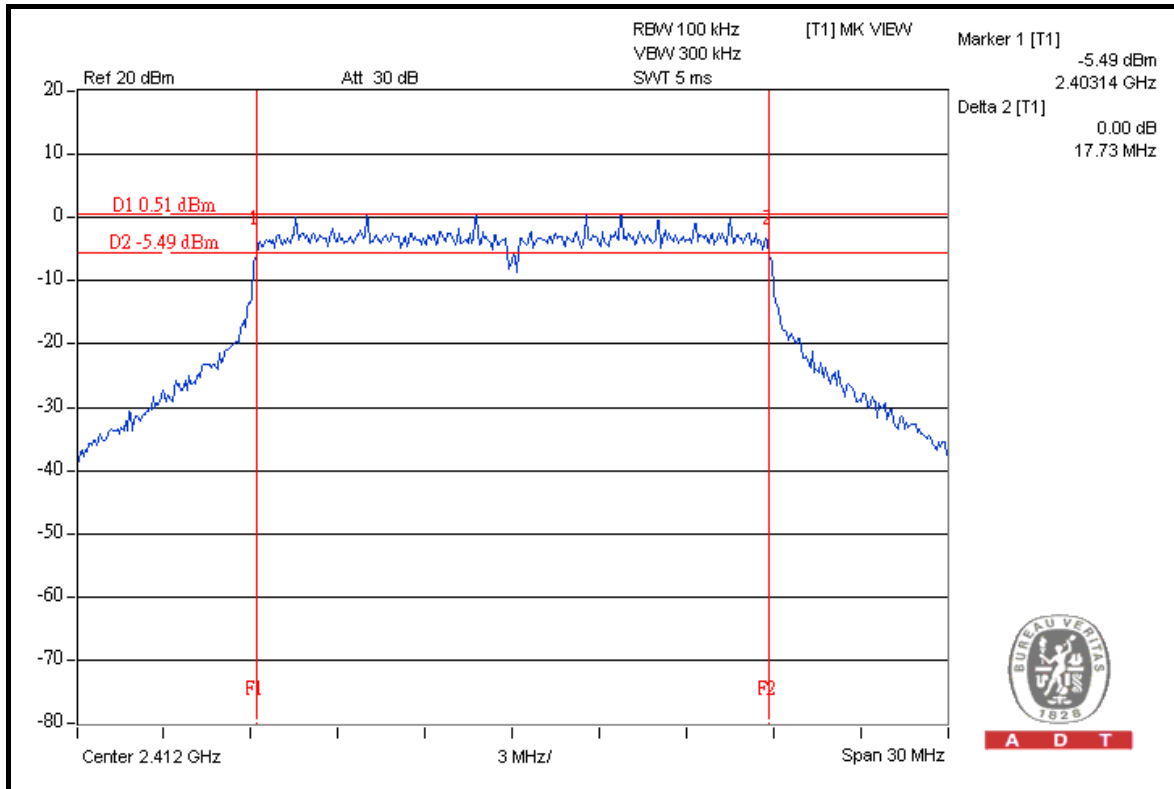


CH 6

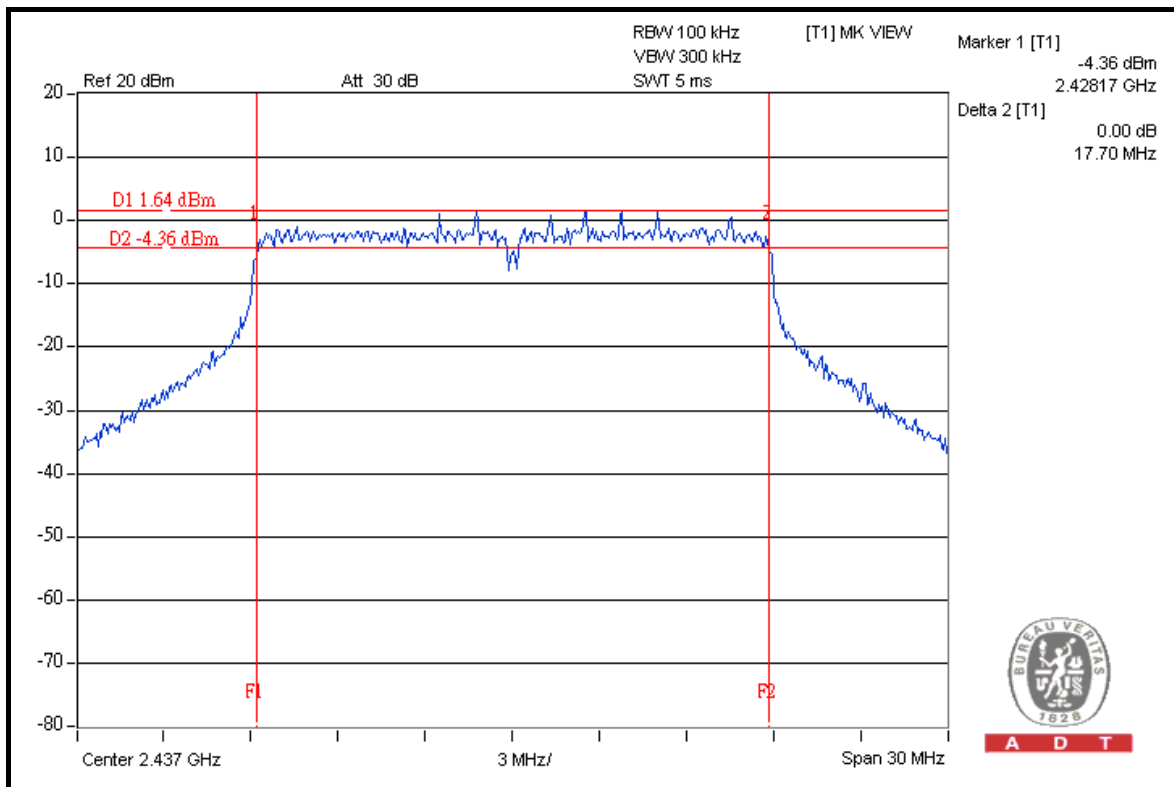




A D T

CH 11

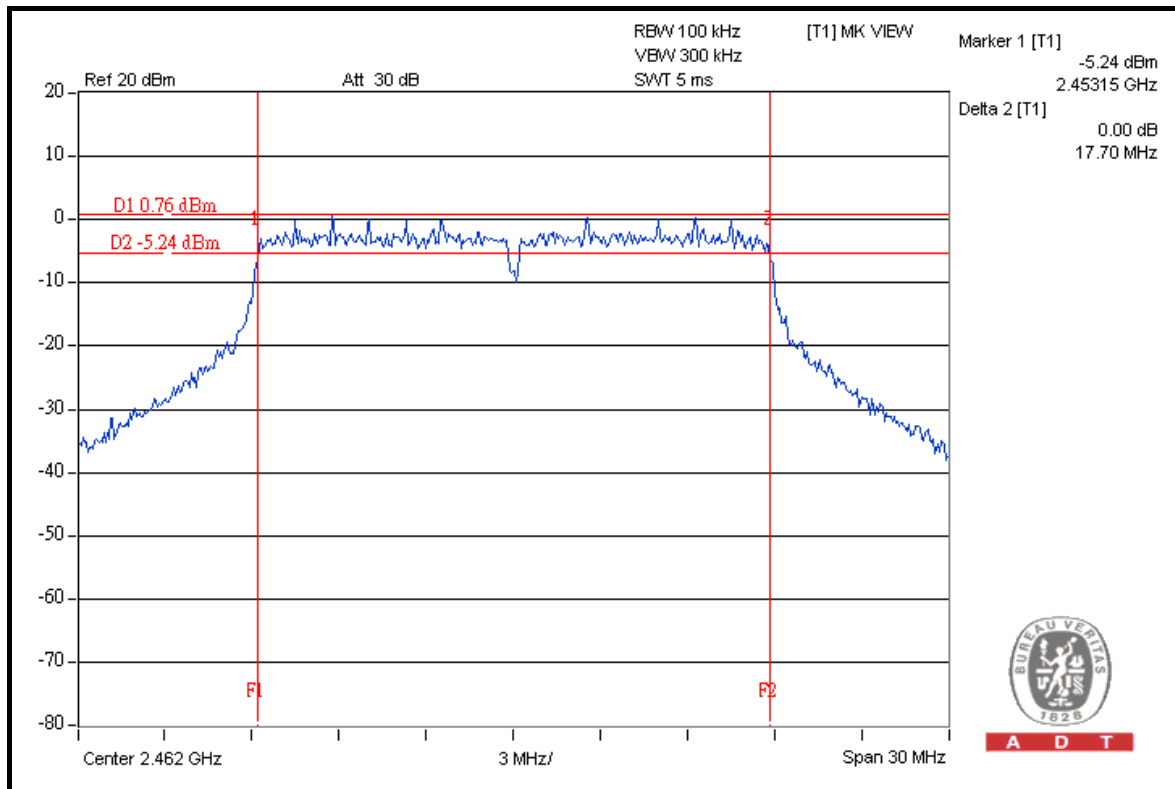


FOR CHAIN 1: CH 1

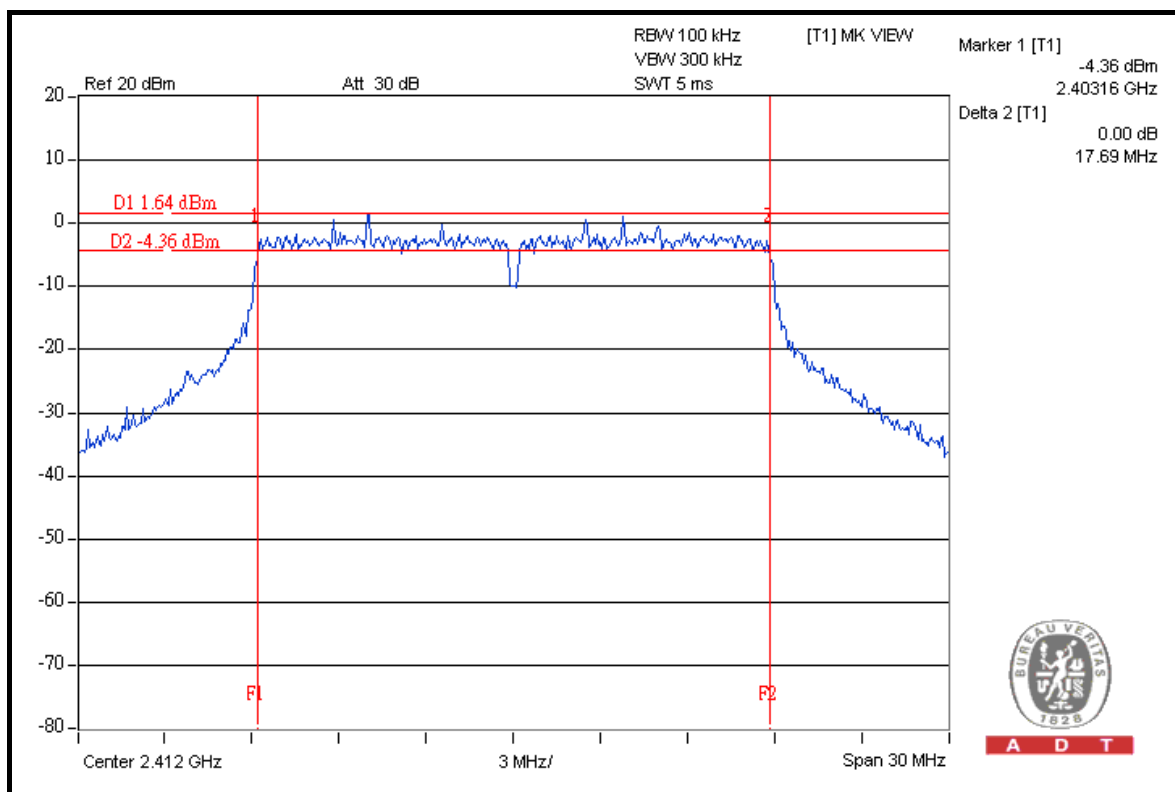




A D T

CH 6

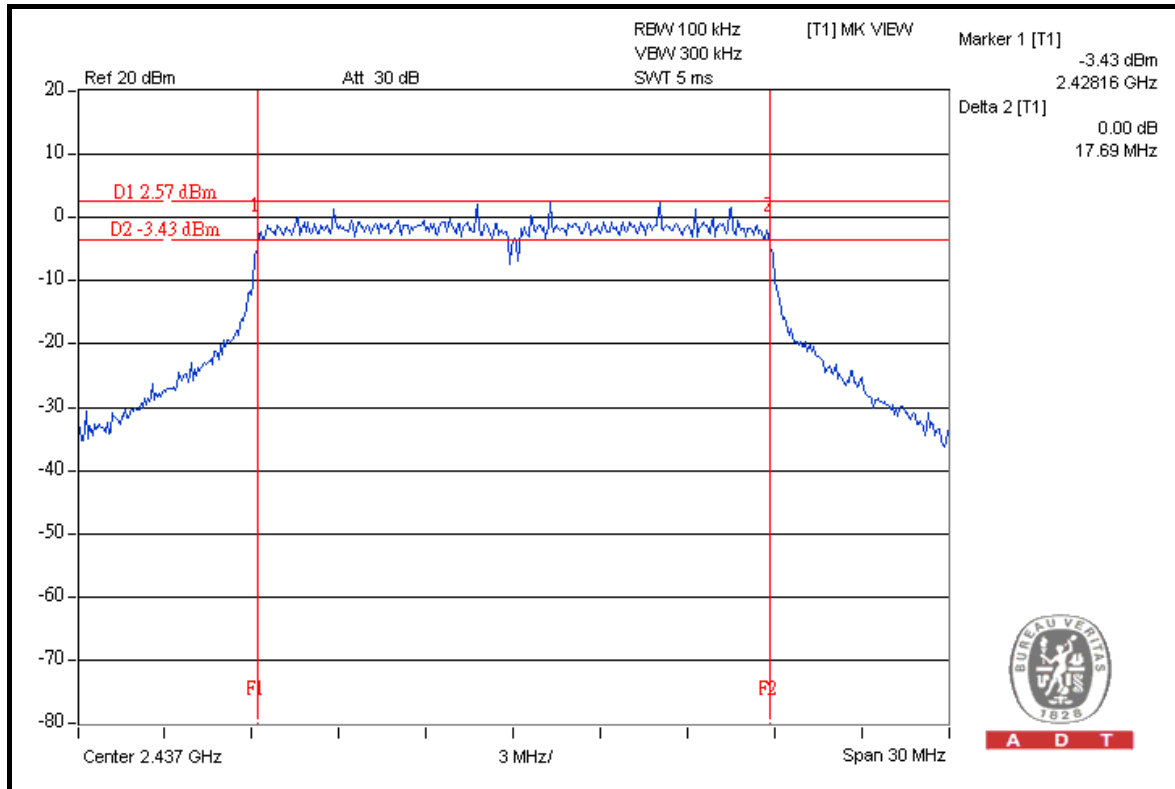

CH 11

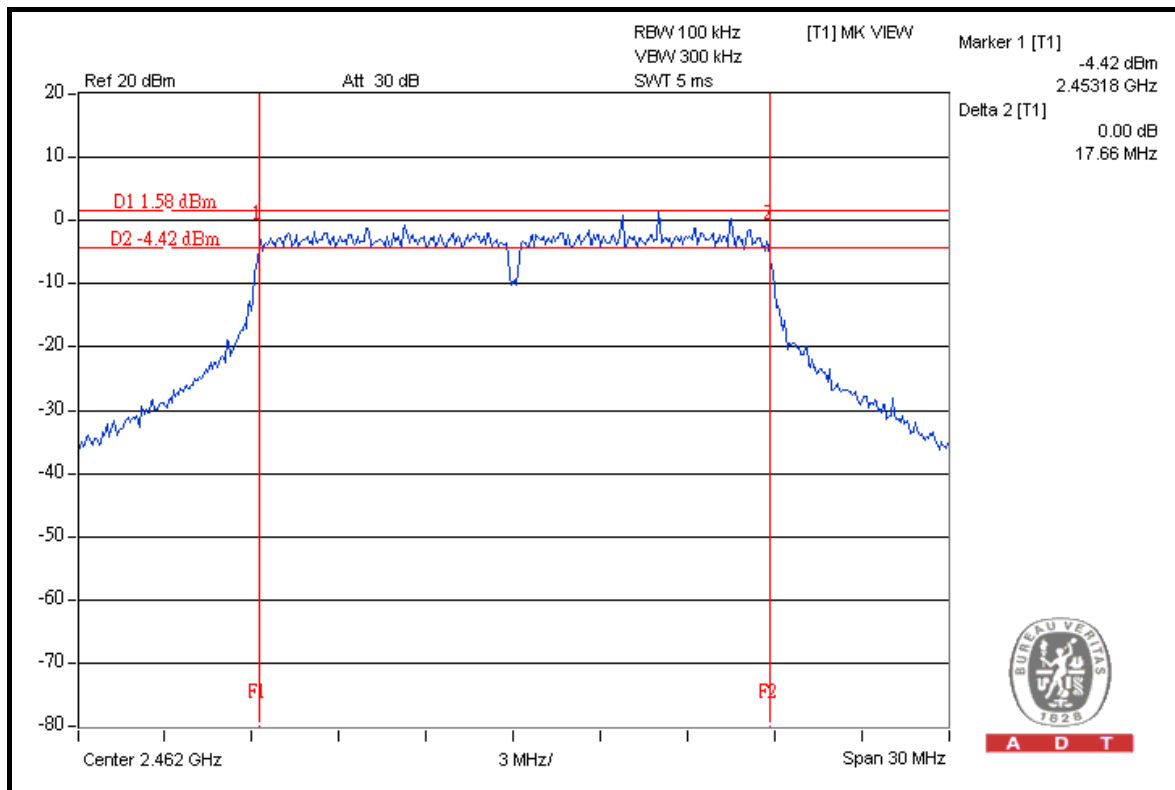



A D T

DRAFT 802.11n (40MHz) OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	15.0Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	18 deg.C, 63 %RH, 1021hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2422	36.46	36.44	0.5	PASS
4	2437	36.47	36.45	0.5	PASS
7	2452	36.52	36.48	0.5	PASS




A D T

FOR CHAIN 0: CH 1

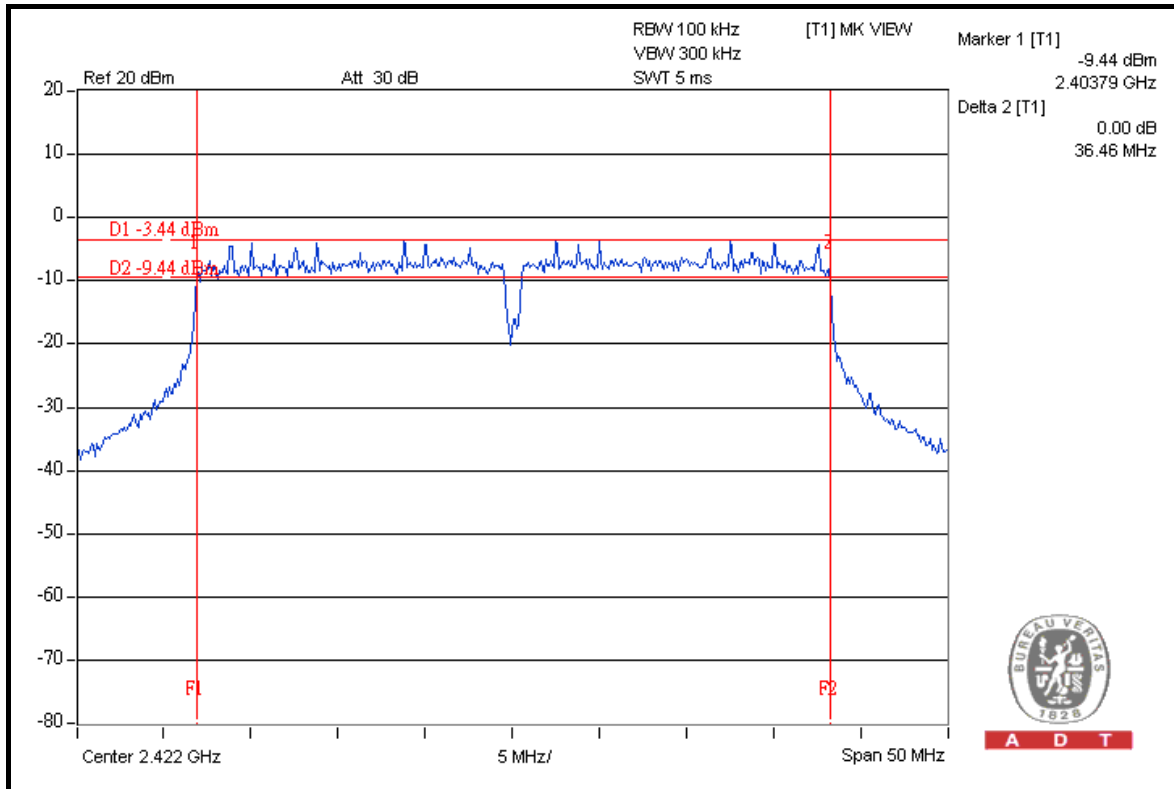


CH 4

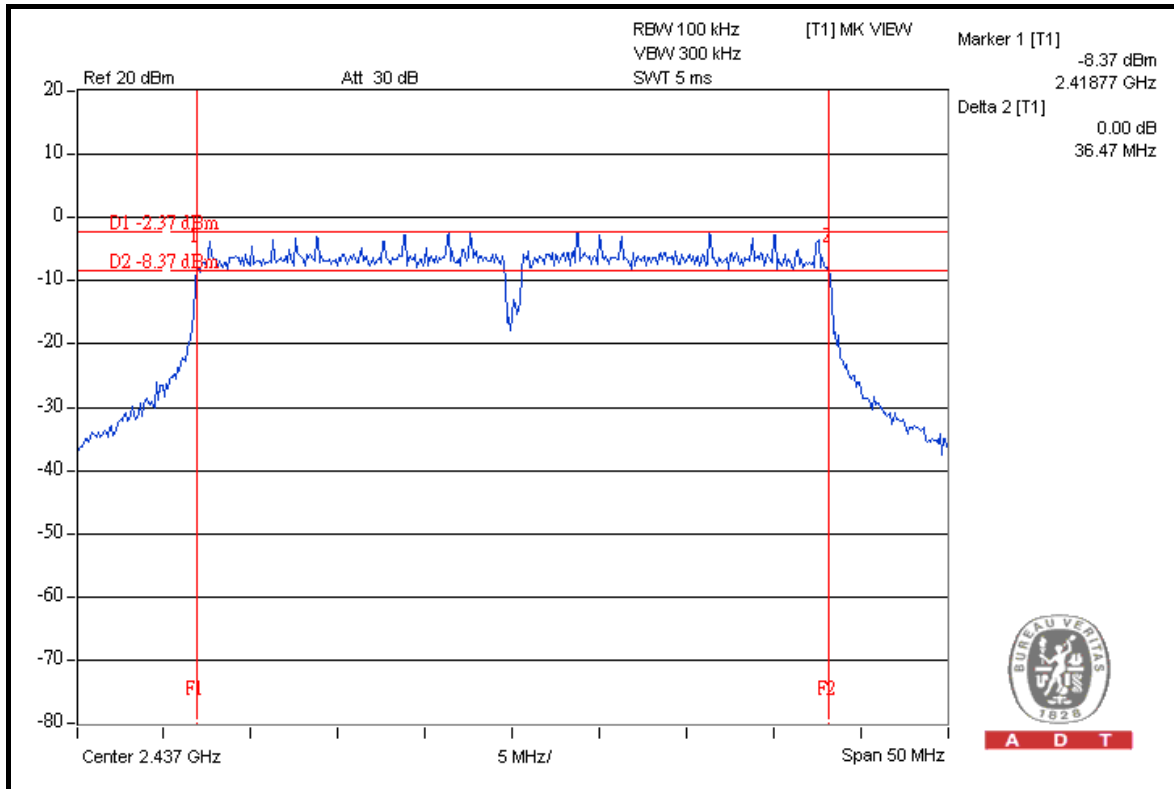




A D T

CH 7

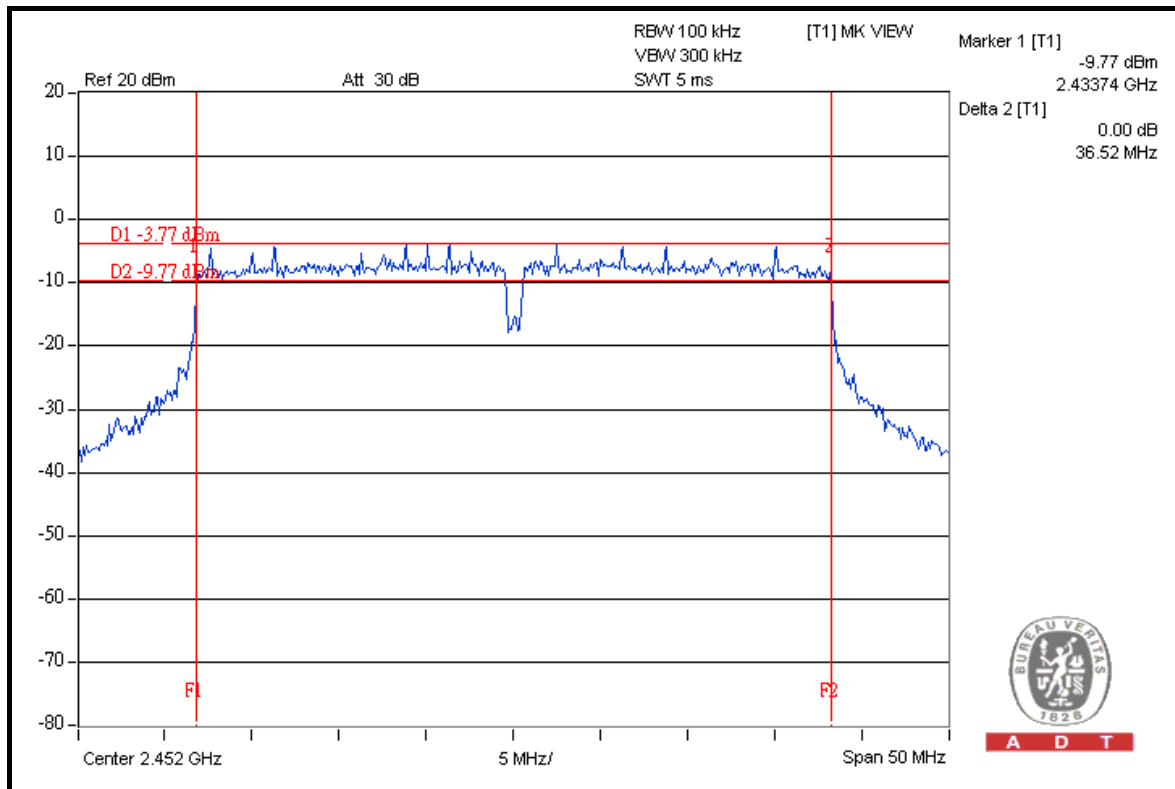


FOR CHAIN 1: CH 1

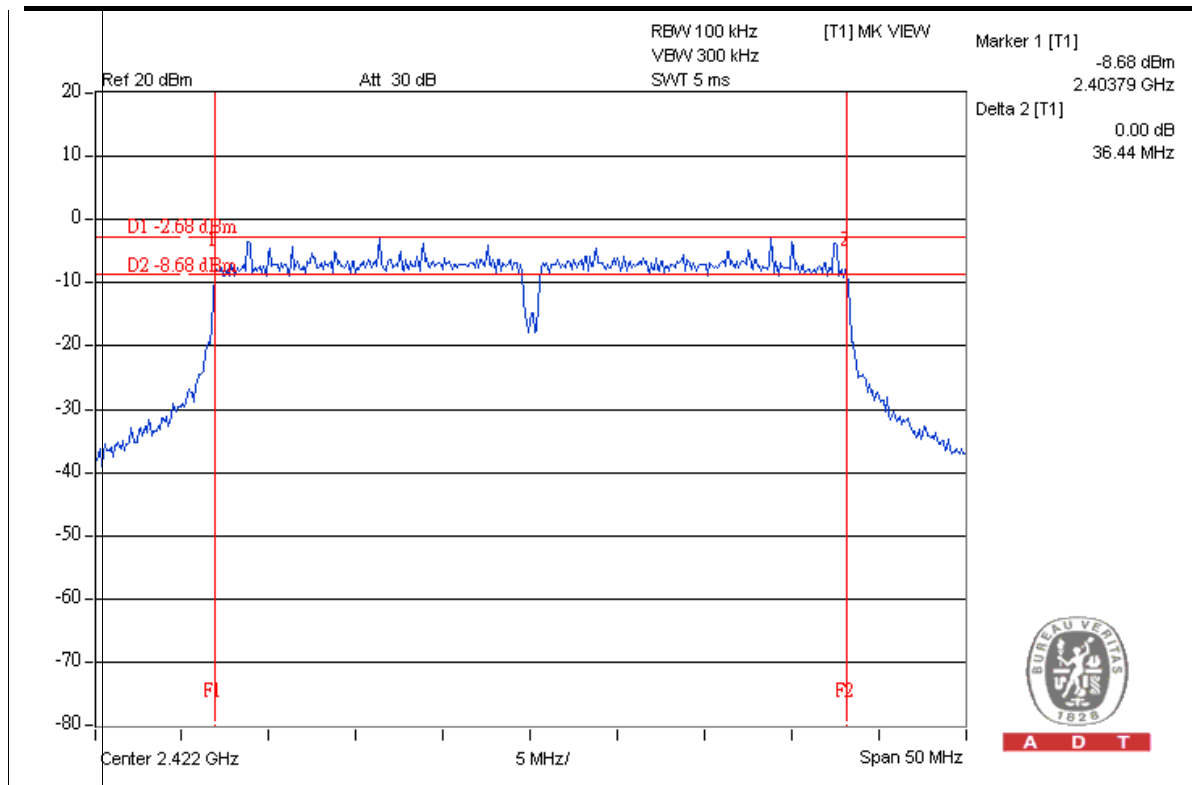




A D T

CH 4

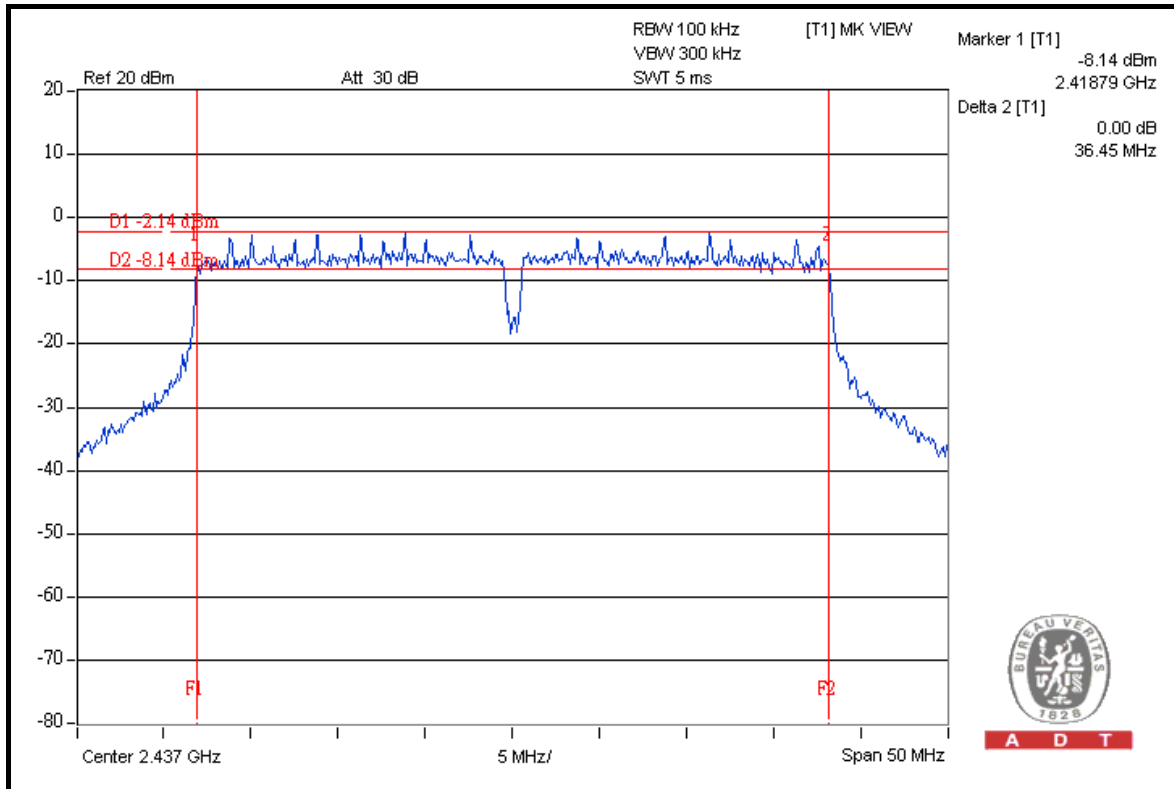

CH 7

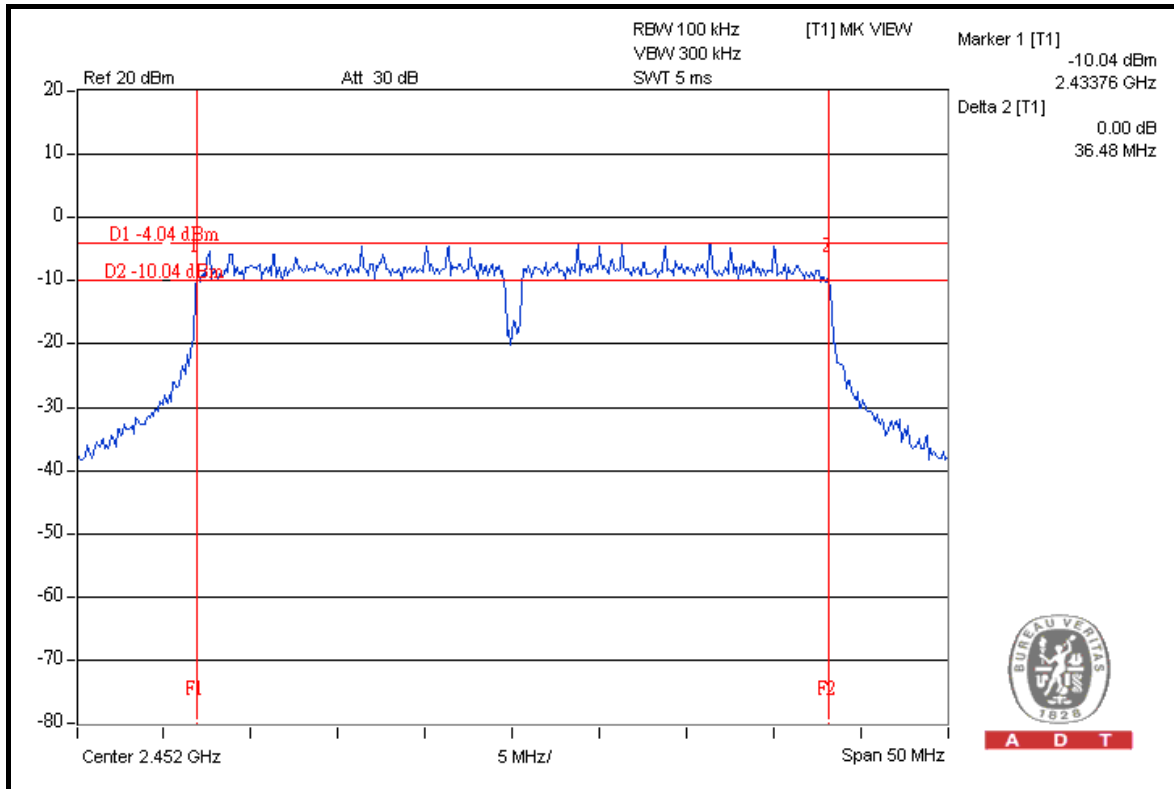



A D T

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
High Speed Peak Power Meter	ML2495A	0824012	Aug. 04, 2008	Aug. 03, 2009
Power Sensor	MA2444B	0738138	Aug. 04, 2008	Aug. 03, 2009

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Measurement Bandwidth of ML2495A is 65MHz greater than 6dB bandwidth of emission.


4.4.3 TEST PROCEDURES

A power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP

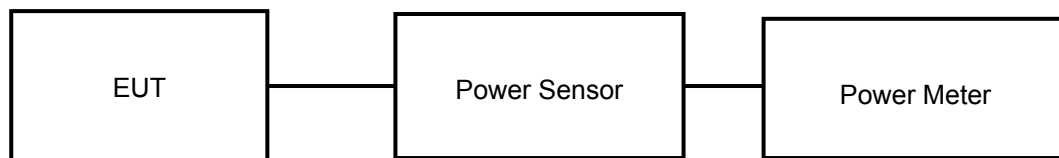

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.



4.4.7 TEST RESULTS

802.11b DSSS MODULATION

MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	18 deg.C, 63 %RH, 1021hPa
TESTED BY	Match Tsui		

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	21.06	20.59	242.195	23.84	30	PASS
6	2437	20.62	20.11	217.911	23.38	30	PASS
11	2462	20.54	20.57	227.265	23.57	30	PASS

802.11g OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	18 deg.C, 63 %RH, 1021hPa
TESTED BY	Match Tsui		

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	23.03	23.11	405.554	26.08	30	PASS
6	2437	23.09	23.08	406.940	26.10	30	PASS
11	2462	22.55	22.58	361.021	25.58	30	PASS



A D T

DRAFT 802.11n (20MHz) OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	7.2Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	18 deg.C, 63 %RH, 1021hPa
TESTED BY	Match Tsui		

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	22.05	22.08	321.760	25.08	30	PASS
6	2437	23.09	23.05	405.541	26.08	30	PASS
11	2462	22.03	22.02	318.809	25.04	30	PASS

DRAFT 802.11n (40MHz) OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	15.0Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	18 deg.C, 63 %RH, 1021hPa
TESTED BY	Match Tsui		

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2422	20.03	20.57	214.718	23.32	30	PASS
4	2437	21.06	21.03	254.409	24.06	30	PASS
7	2452	19.58	19.51	180.113	22.56	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100041	Apr. 22, 2008	Apr. 21, 2009

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

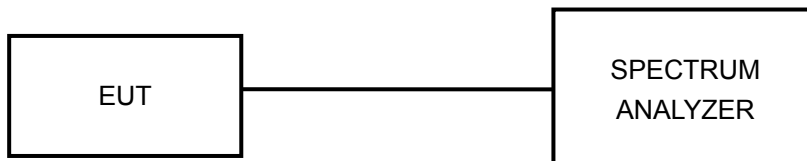

4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6



A D T

4.5.7 TEST RESULTS

802.11b DSSS MODULATION


MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	18 deg.C, 63 %RH, 1021hPa
TESTED BY	Match Tsui		

CHAN.	CHAN. FREQ. (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	-5.90	-6.59	0.476	-3.22	8	PASS
6	2437	-6.34	-7.19	0.423	-3.73	8	PASS
11	2462	-6.40	-6.59	0.448	-3.48	8	PASS




A D T

FOR CHAIN 0: CH 1

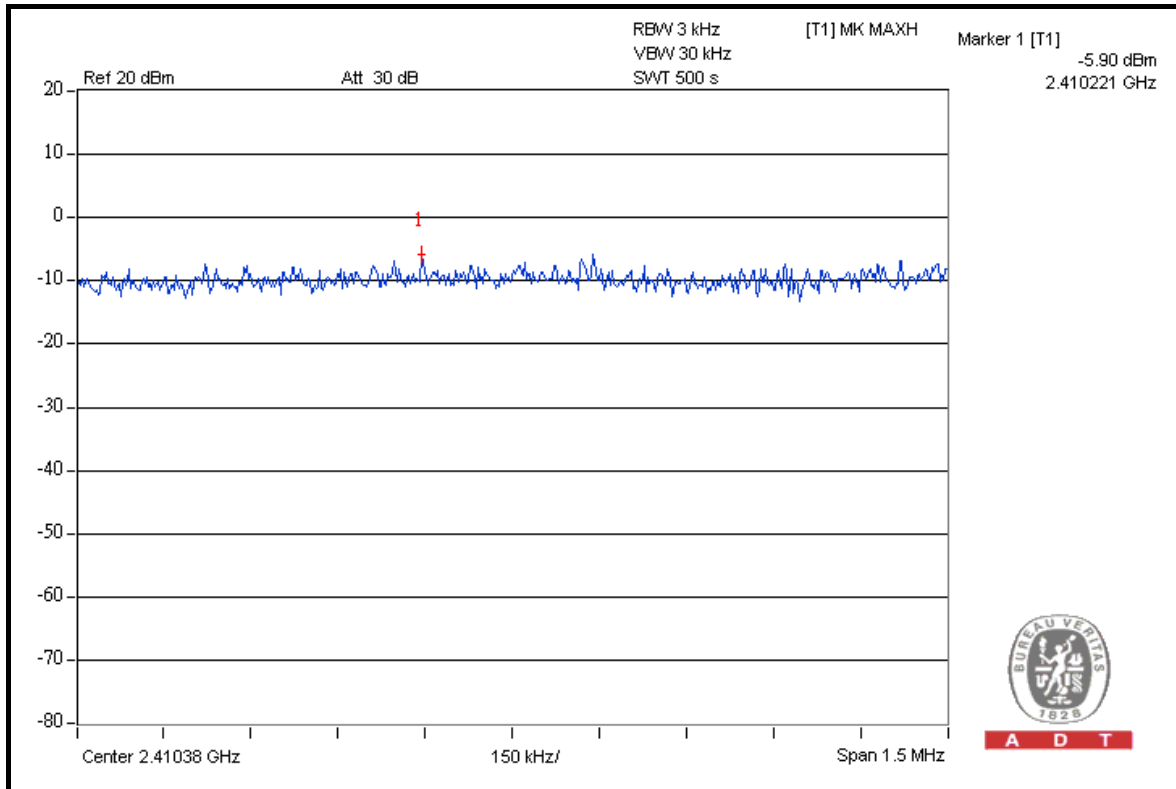


CH 6

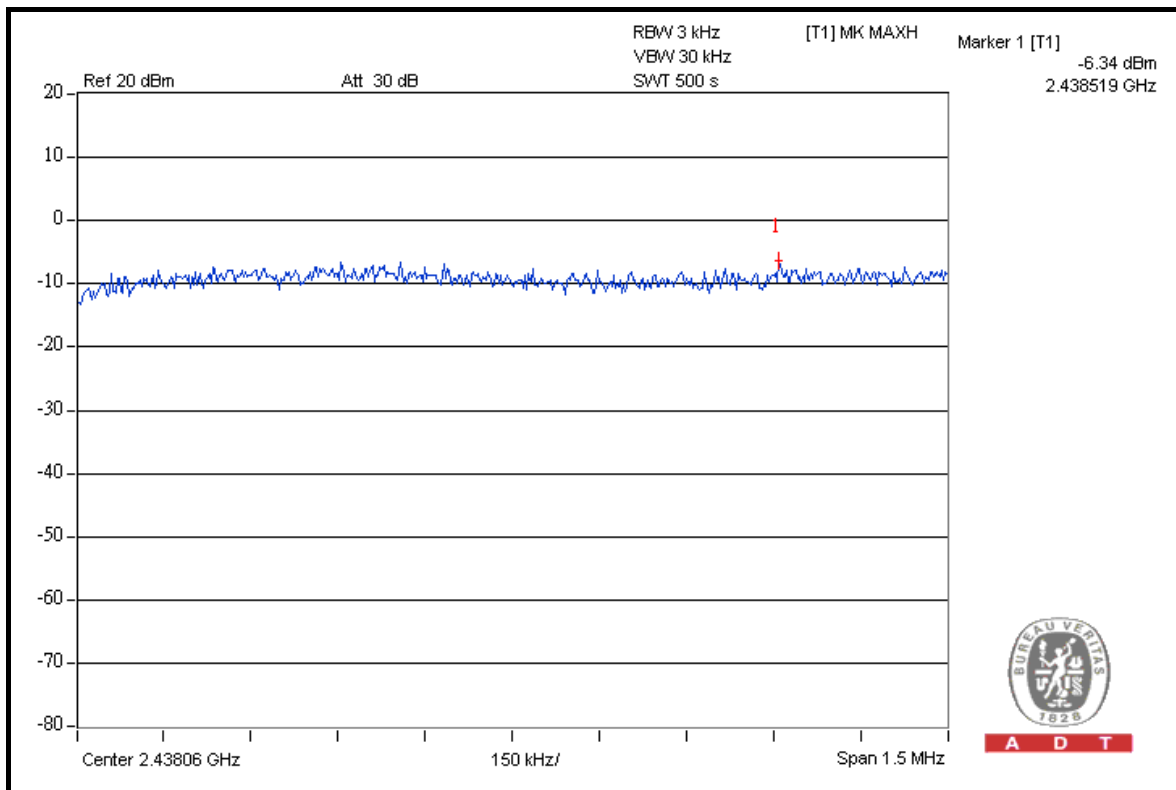




A D T

CH 6

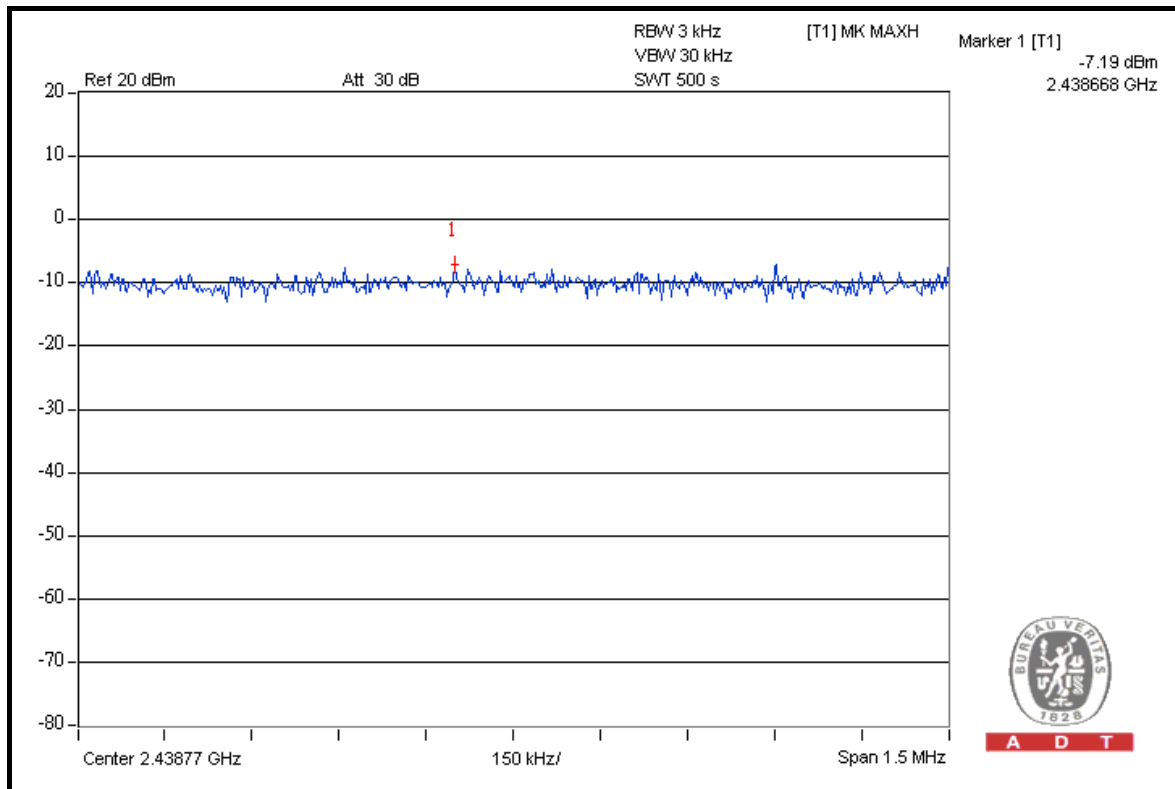

CH 11

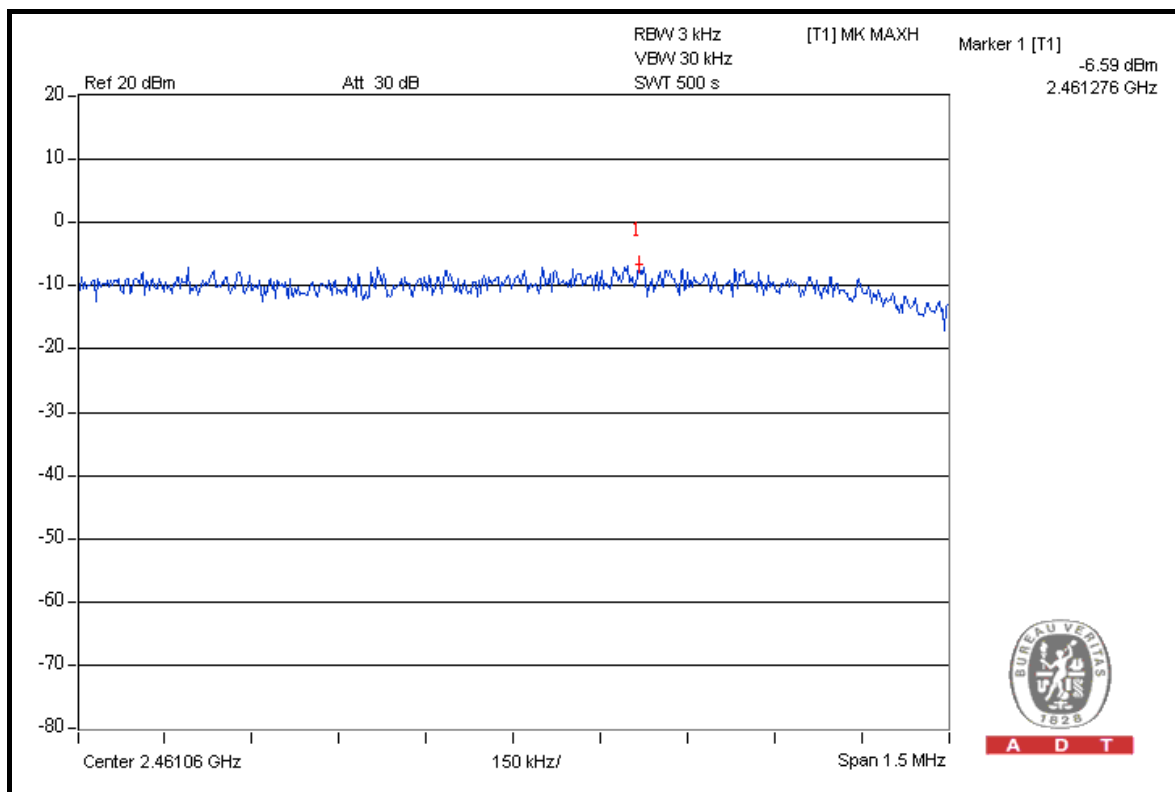



A D T

802.11g OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	18deg.C, 63%RH, 1021hPa
TESTED BY	Match Tsui		

CHAN.	CHAN. FREQ. (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	-10.33	-7.62	0.266	-5.76	8	PASS
6	2437	-10.27	-7.50	0.272	-5.66	8	PASS
11	2462	-10.87	-7.96	0.242	-6.17	8	PASS




A D T

FOR CHAIN 0: CH 1

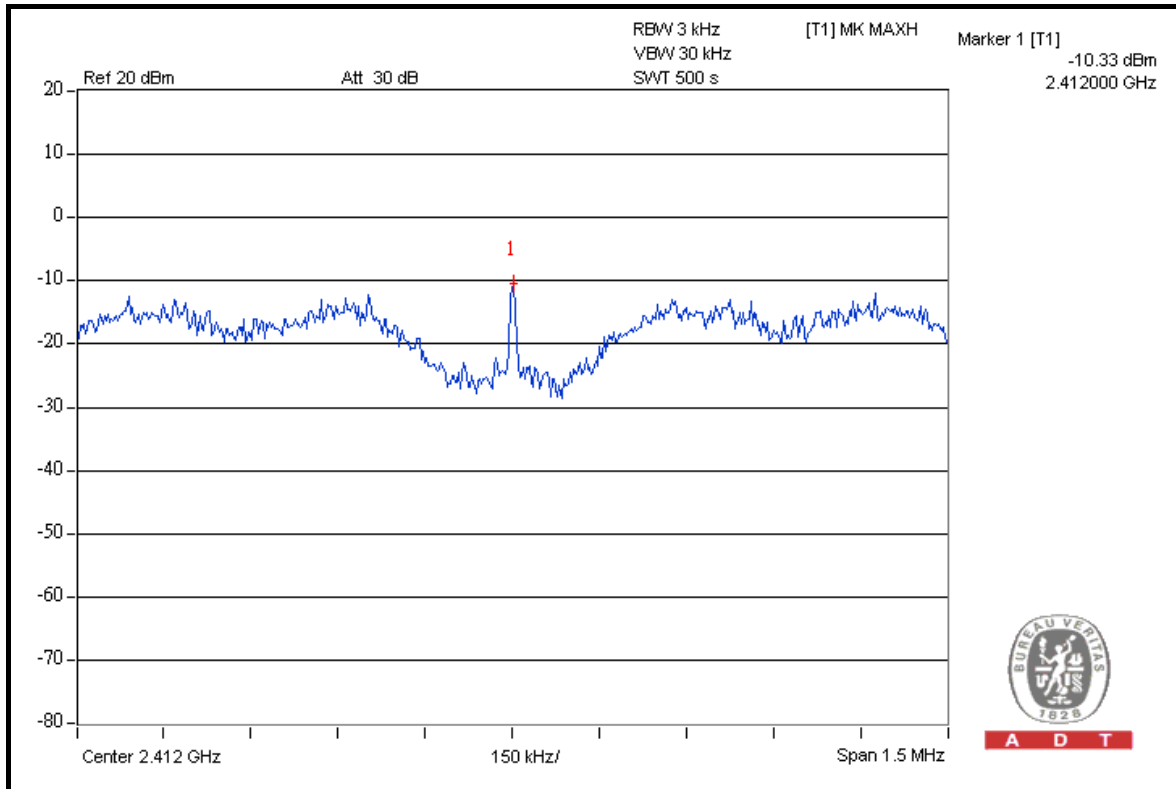


CH 6

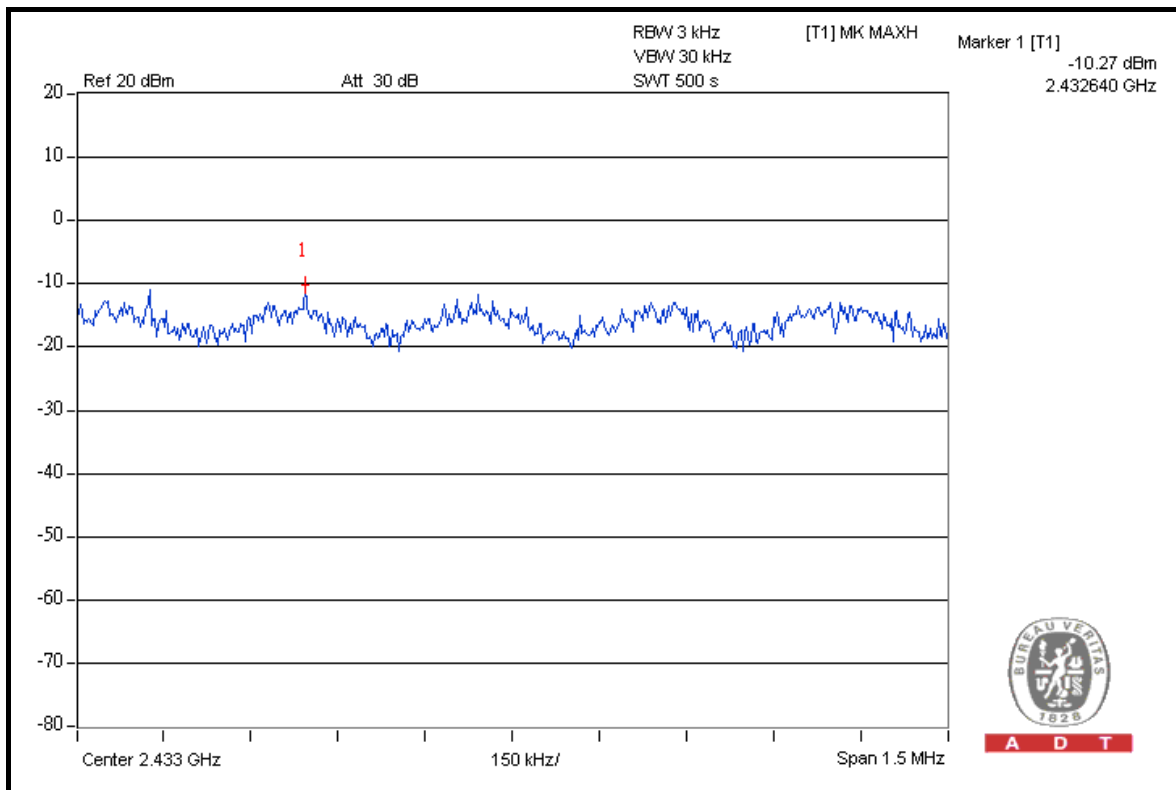




A D T

CH 11

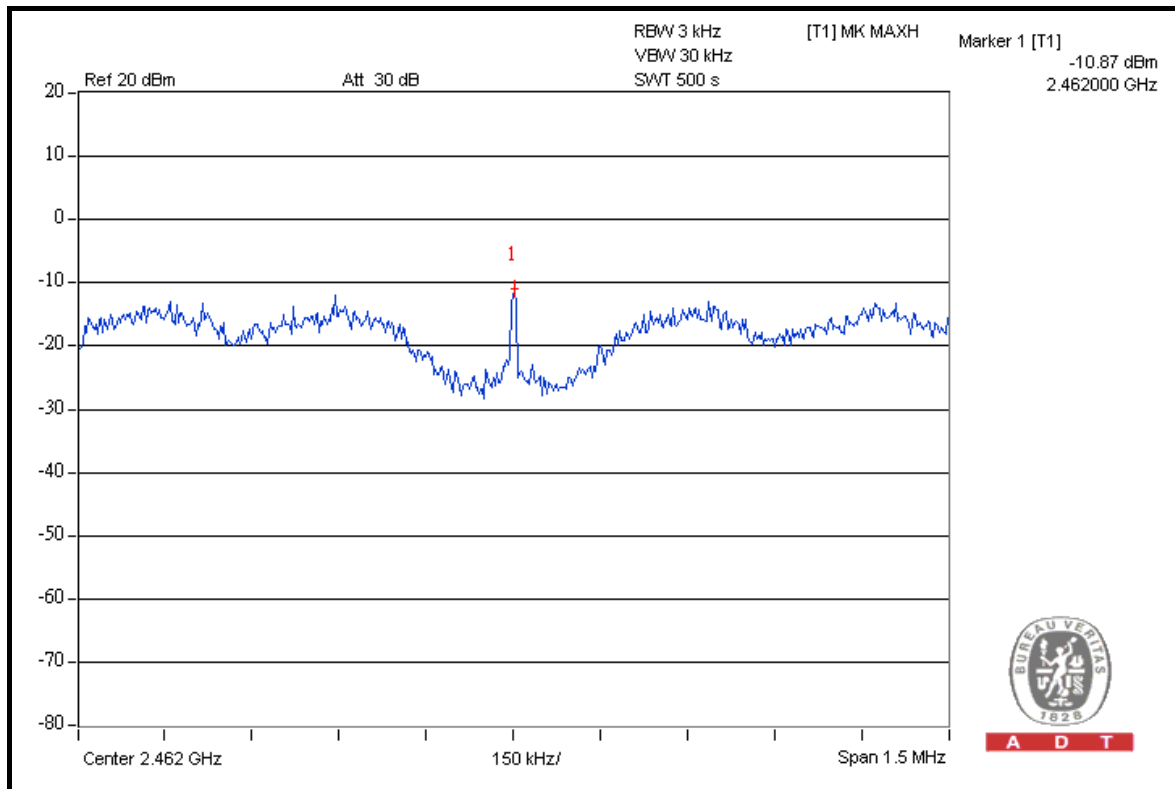


FOR CHAIN 1: CH 1

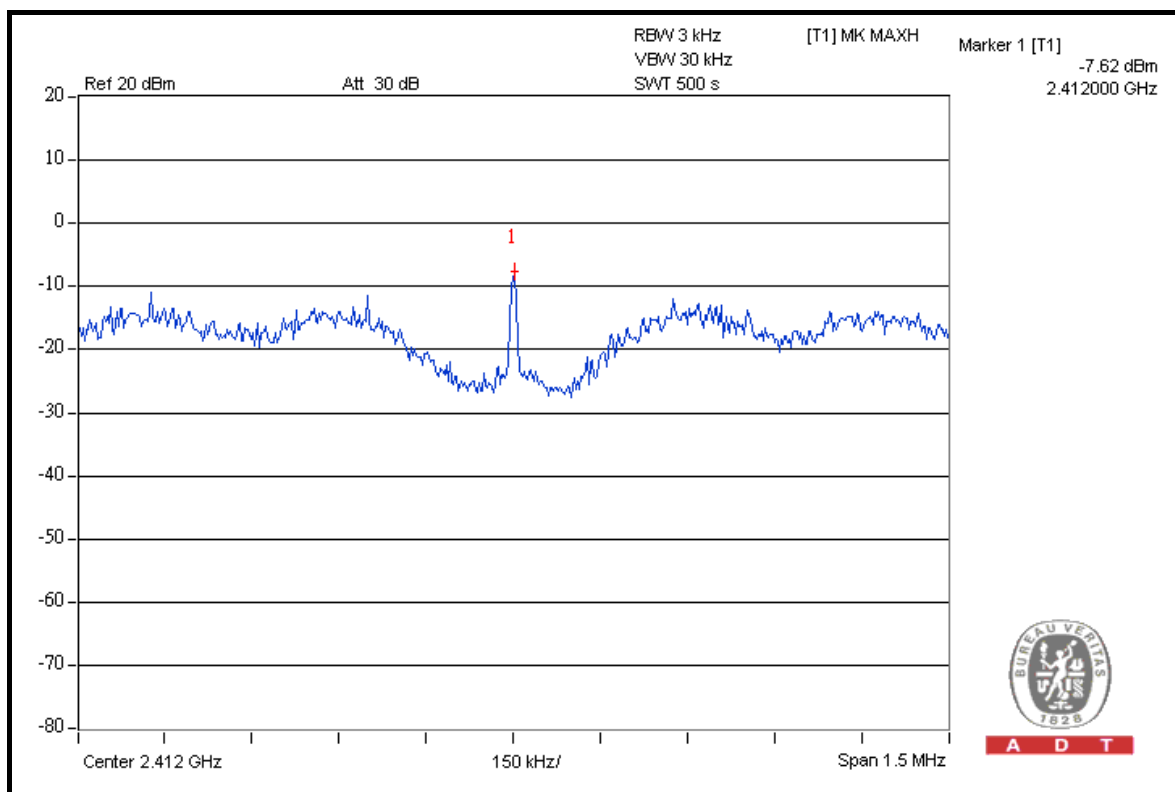




A D T

CH 6

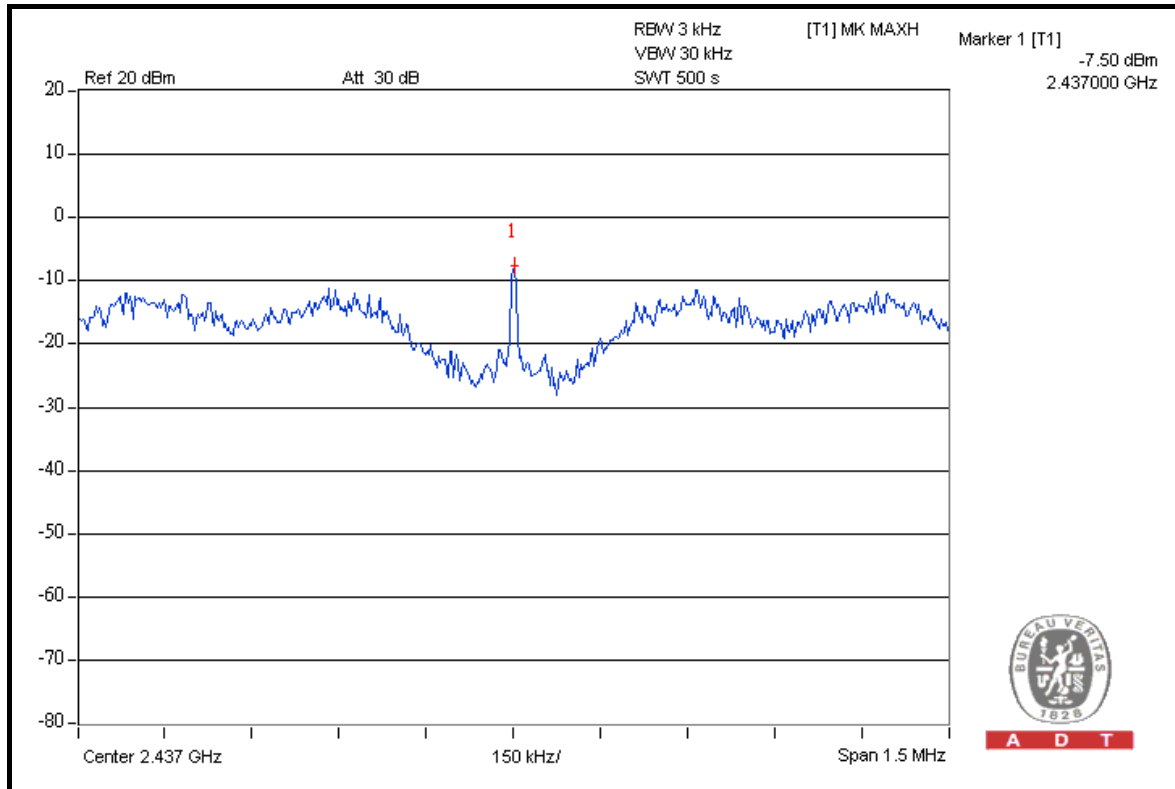

CH 11

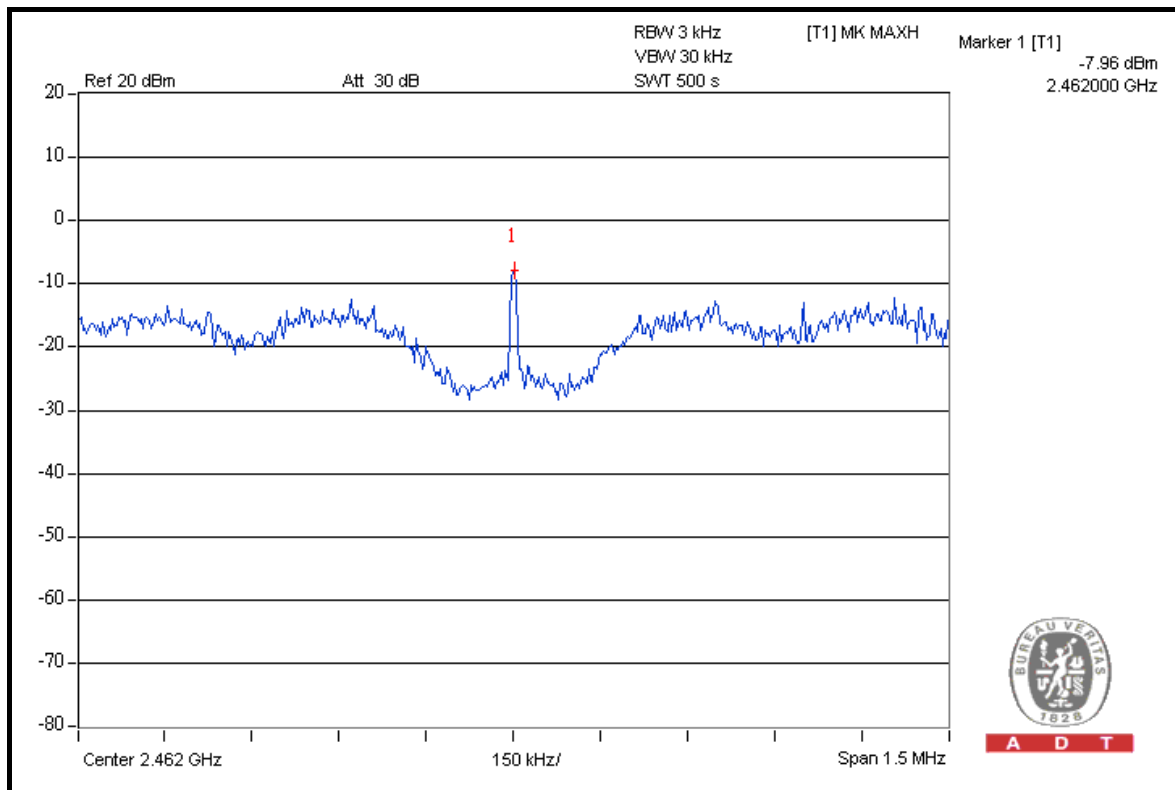



A D T

DRAFT 802.11n (20MHz) OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	7.2Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	18 deg.C, 63 %RH, 1021hPa
TESTED BY	Match Tsui		

CHAN.	CHAN. FREQ. (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	-10.72	-6.28	0.320	-4.95	8	PASS
6	2437	-9.70	-5.40	0.396	-4.03	8	PASS
11	2462	-10.55	-6.29	0.323	-4.91	8	PASS




A D T

FOR CHAIN 0: CH 1

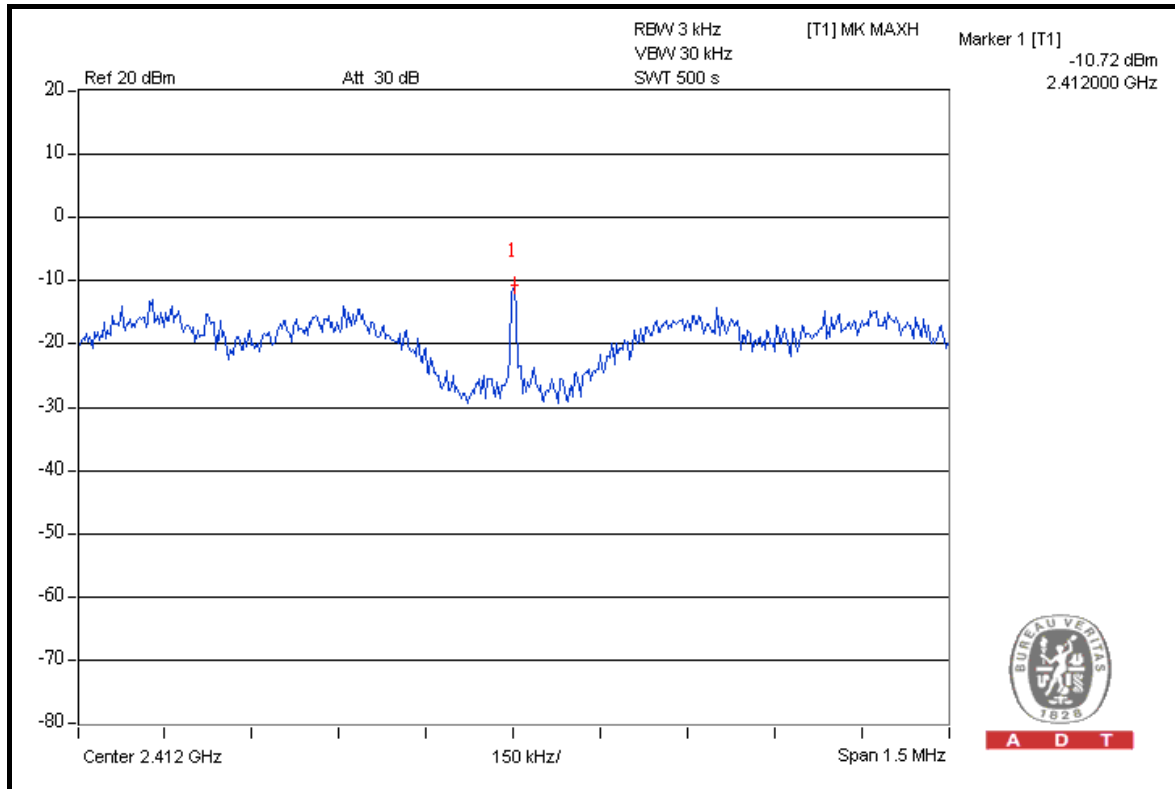


CH 6

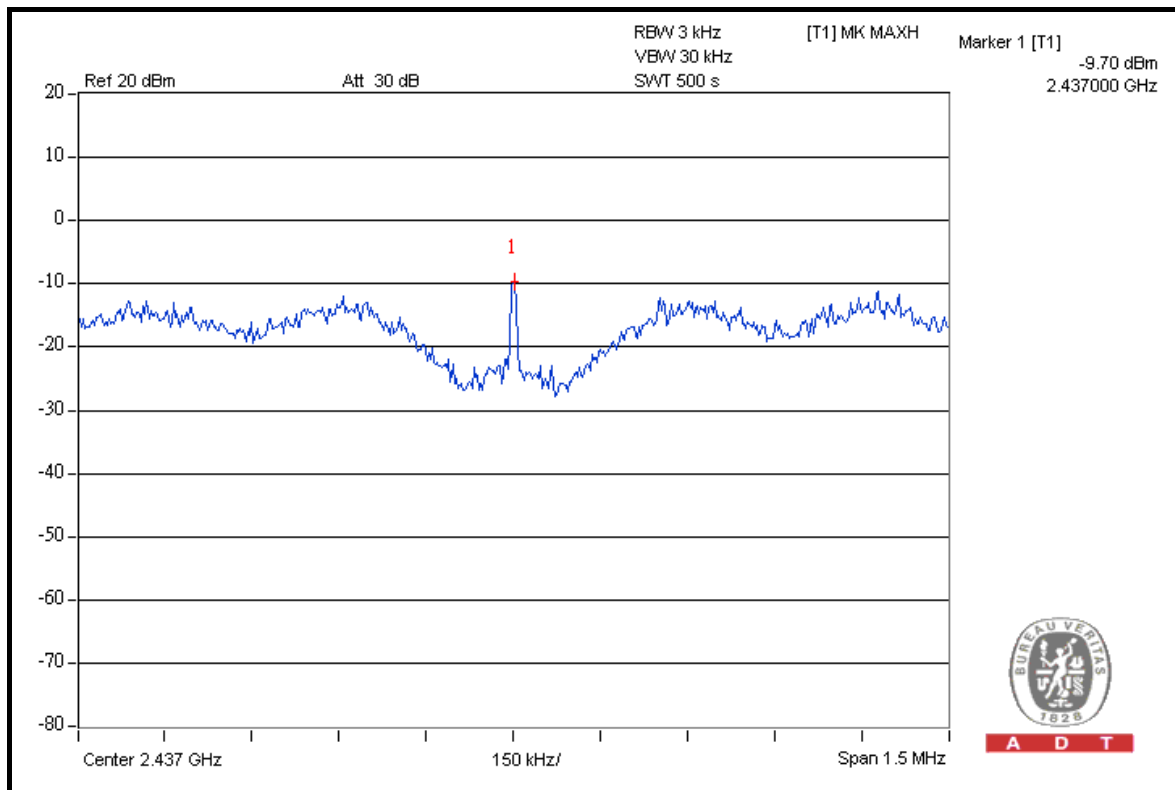




A D T

CH 11

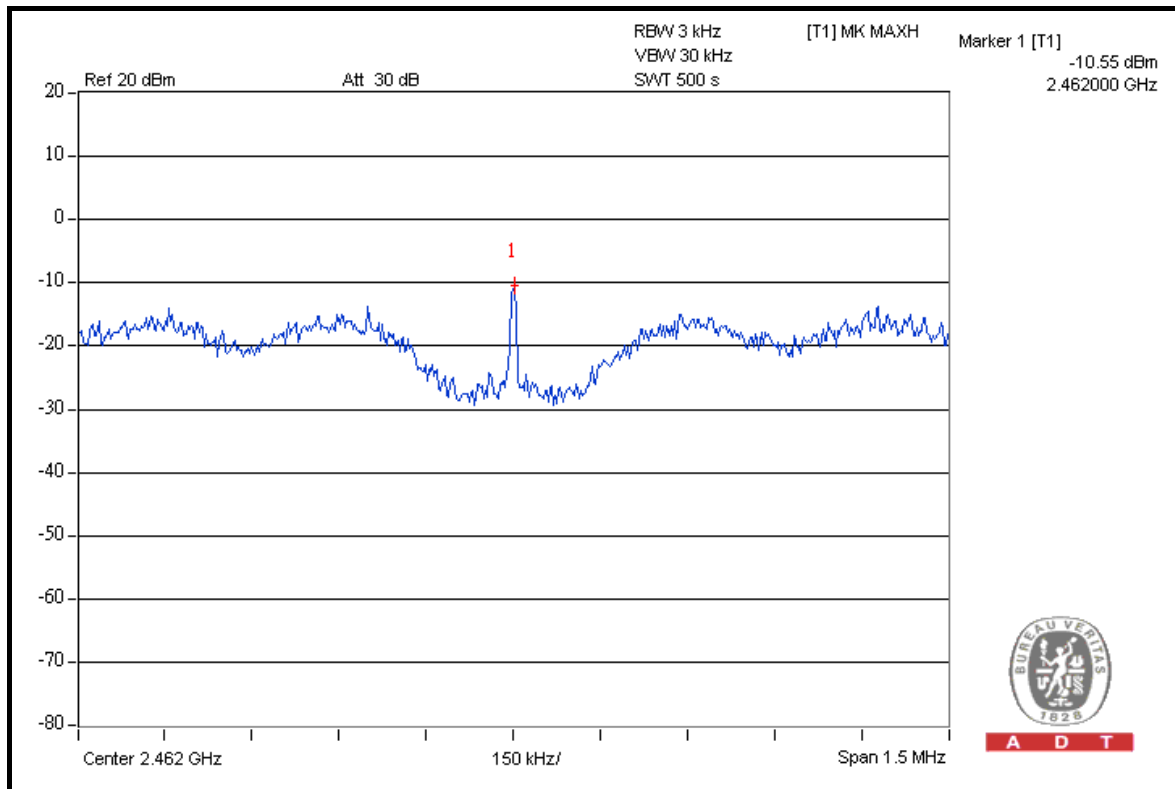


FOR CHAIN 1: CH 1

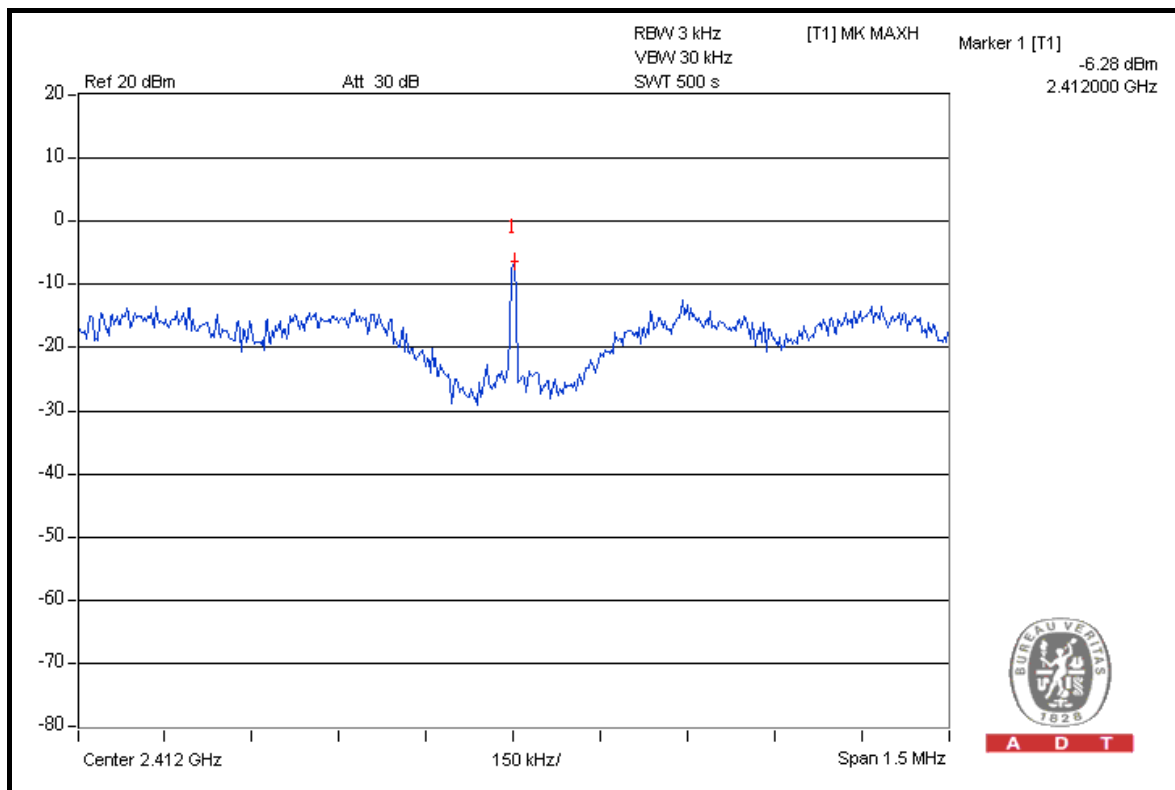




A D T

CH 6

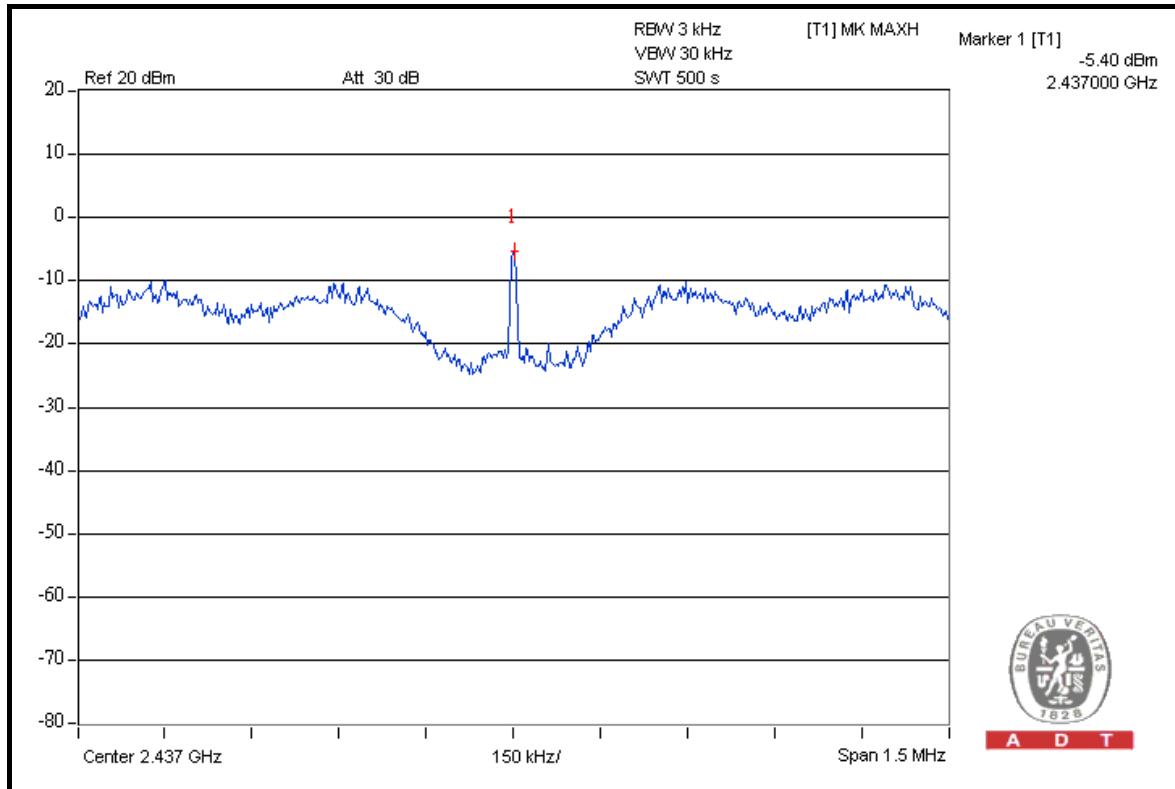

CH 11

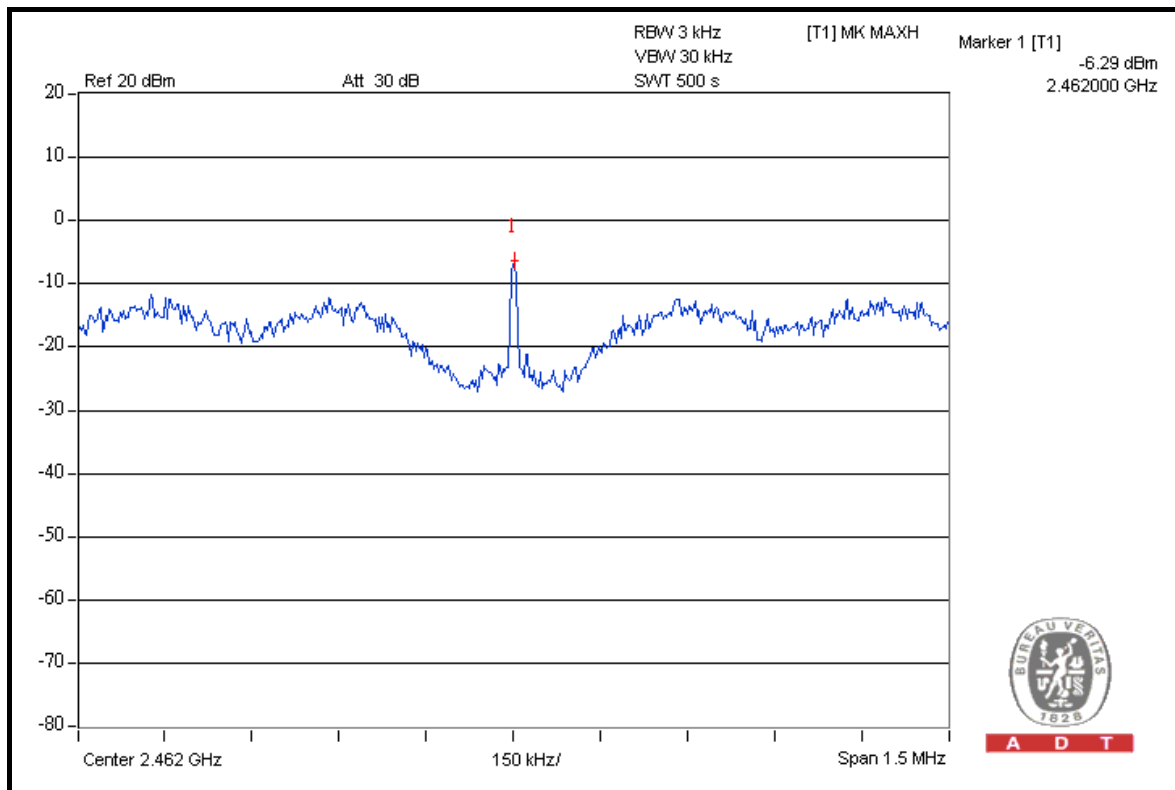



A D T

DRAFT 802.11n (40MHz) OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	15.0Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	18 deg.C, 63 %RH, 1021hPa
TESTED BY	Match Tsui		

CHAN.	CHAN. FREQ. (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2422	-17.38	-17.74	0.035	-14.55	8	PASS
4	2437	-16.26	-17.29	0.042	-13.73	8	PASS
7	2452	-17.72	-19.06	0.029	-15.33	8	PASS




A D T

FOR CHAIN 0: CH 1

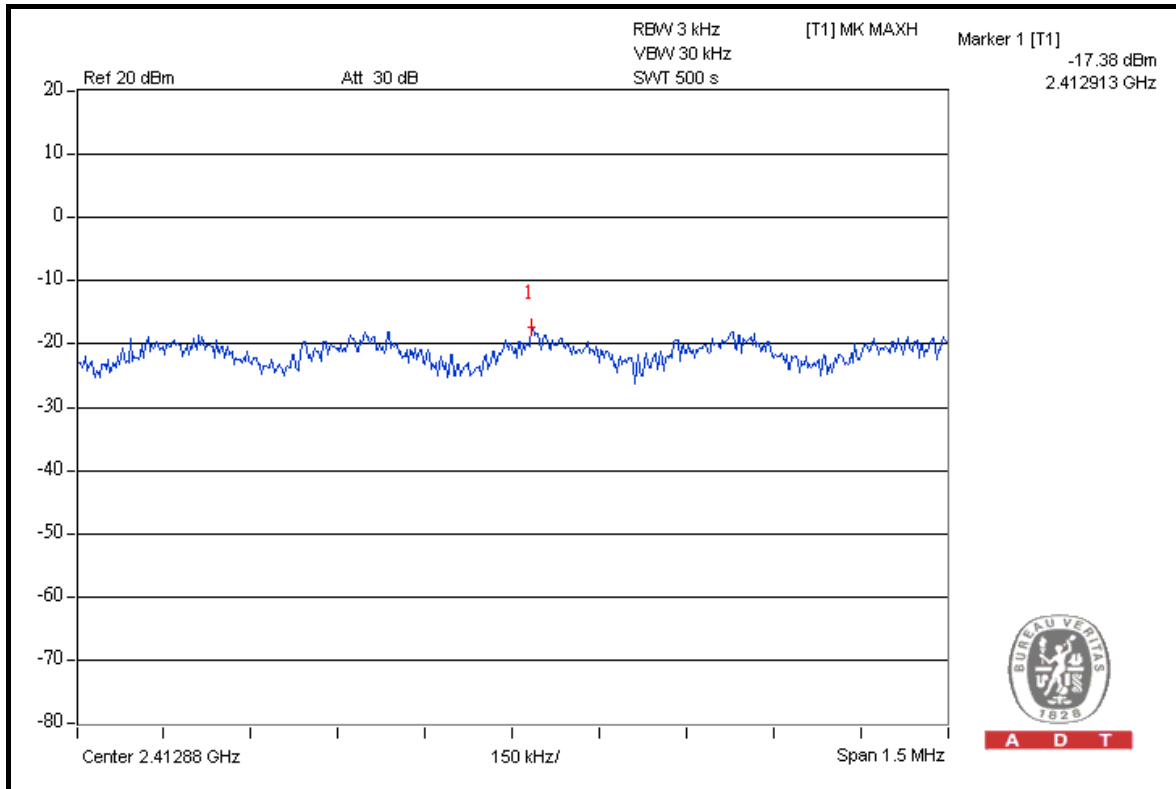


CH 4

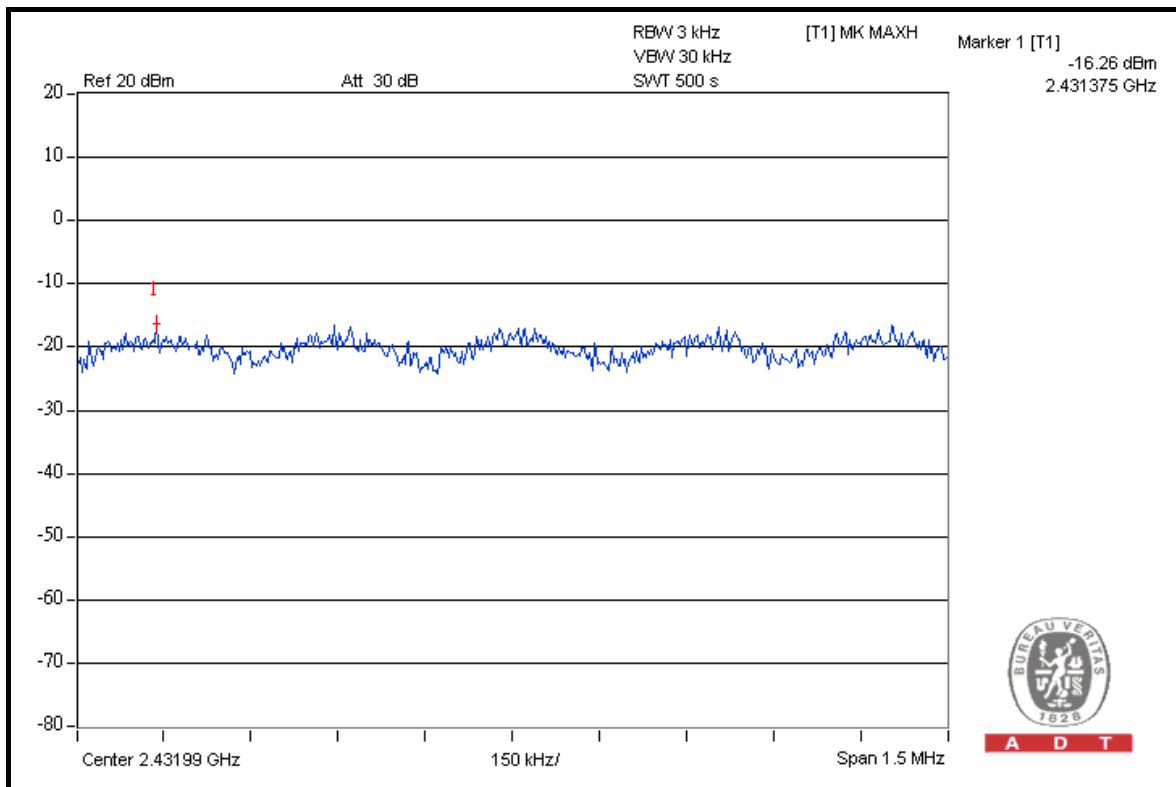




A D T

CH 7

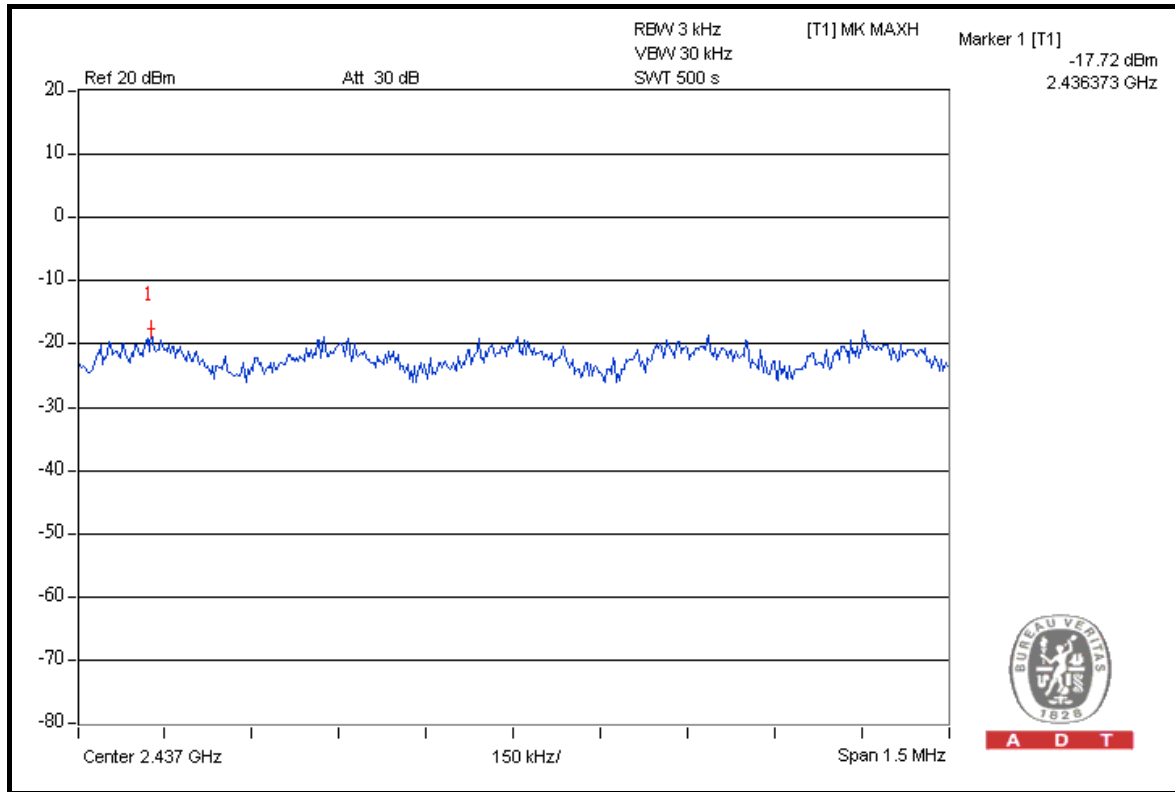


FOR CHAIN 1: CH 1

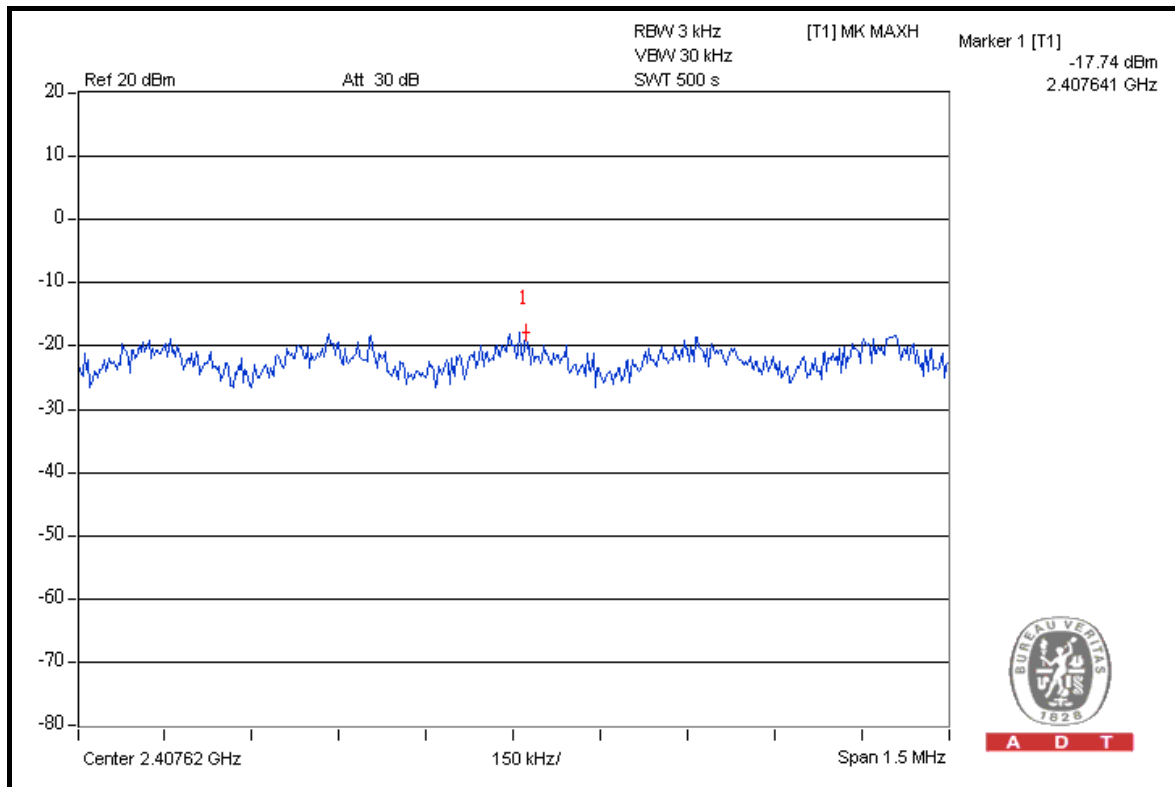




A D T

CH 4

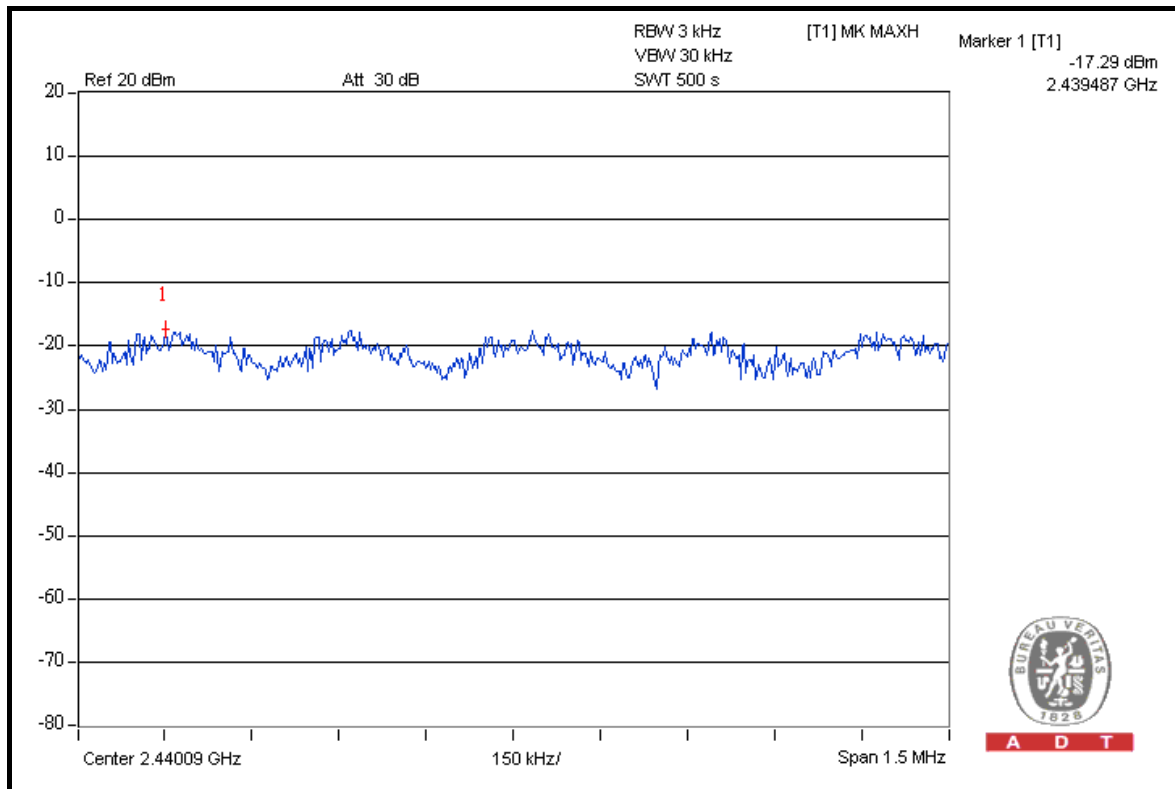

CH 7

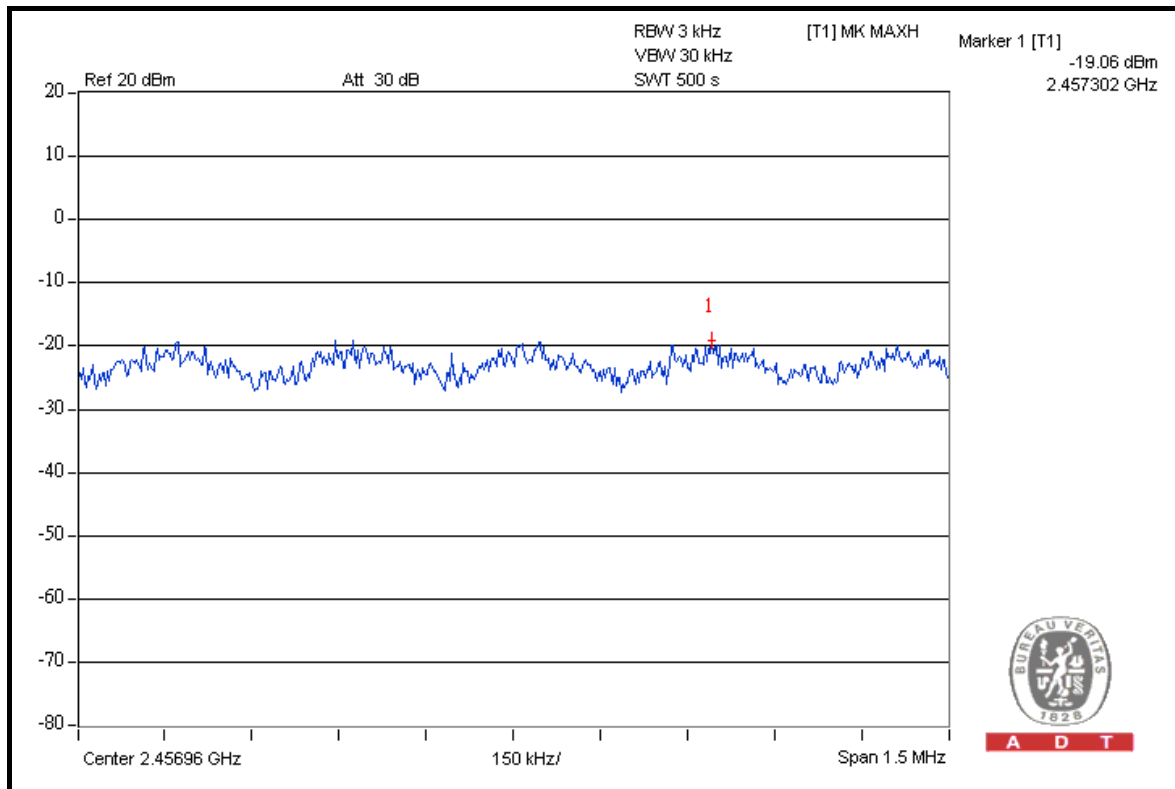

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100212	May 28, 2008	May 27, 2009
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Aug. 08, 2008	Aug. 07, 2009
BILOG Antenna SCHWARZBECK	VULB9168	9168-156	Apr. 25, 2008	Apr. 24, 2009
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 07, 2008	Jan. 06, 2009
Preamplifier Agilent	8449B	3008A01911	Sep. 10, 2008	Sep. 09, 2009
Preamplifier Agilent	8447D	2944A10638	Dec. 26, 2008	Dec. 25, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218190/4 231241/4	May 20, 2008	May 19, 2009
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Aug. 09, 2008	Aug. 08, 2009
Software	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn Table Controller EMCO	2090	NA	NA	NA
Turn Table ADT.	TT100.	TT93021703	NA	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 9.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 460141.
 5. The IC Site Registration No. is IC 7450F-4.



A D T

4.6.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. Set both RBW and VBW of spectrum analyzer to 100kHz and 300kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW = 100kHz, VBW = 300kHz) are attached on the following pages.

NOTE: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 1KHz for Average detection (AV) at frequency above 1GHz.



A D T

4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6.

4.6.6 TEST RESULTS

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS MODULATION

NOTE 1: The band edge emission plot on the next page shows 55.61dBc between carrier maximum power and local maximum emission in restrict band (2.3896GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 115.82dBuV/m (Peak), so the maximum field strength in restrict band is $115.82 - 55.61 = 60.21$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of on the next page shows 59.65dBc between carrier maximum power and local maximum emission in restrict band (2.3894GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 111.32dBuV/m (Average), so the maximum field strength in restrict band is $111.32 - 59.65 = 51.67$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 58.20dBc between carrier maximum power and local maximum emission in restrict band (2.4994GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 115.59dBuV/m (Peak), so the maximum field strength in restrict band is $115.59 - 58.20 = 57.39$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 65.10dBc between carrier maximum power and local maximum emission in restrict band (2.4988GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 111.03dBuV/m (Average), so the maximum field strength in restrict band is $111.03 - 65.10 = 45.93$ dBuV/m which is under 54dBuV/m limit.





A D T

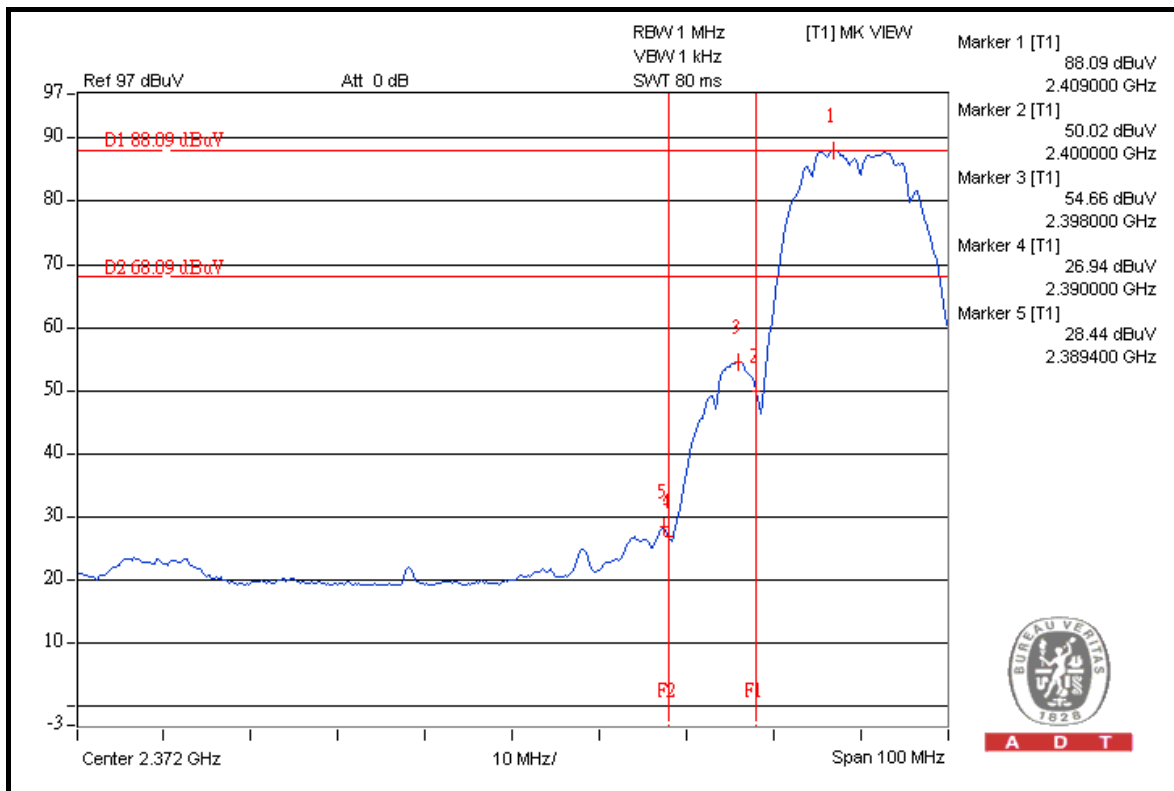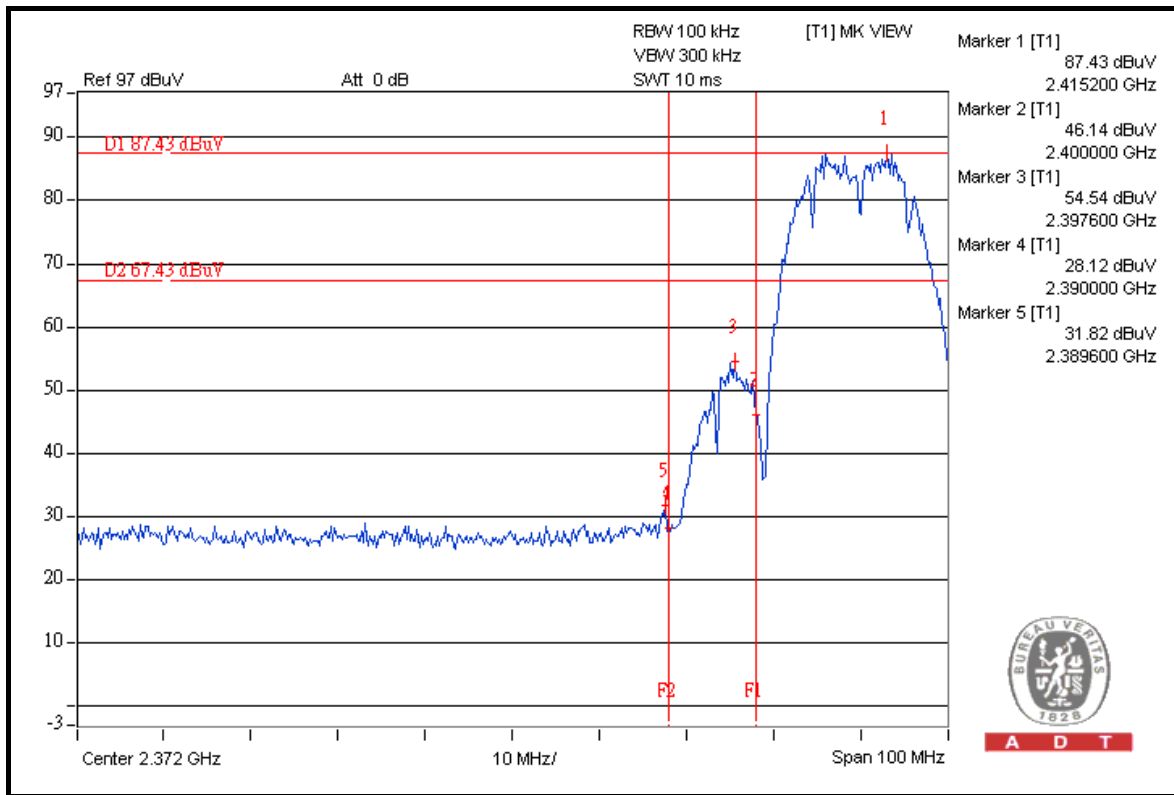





A D T

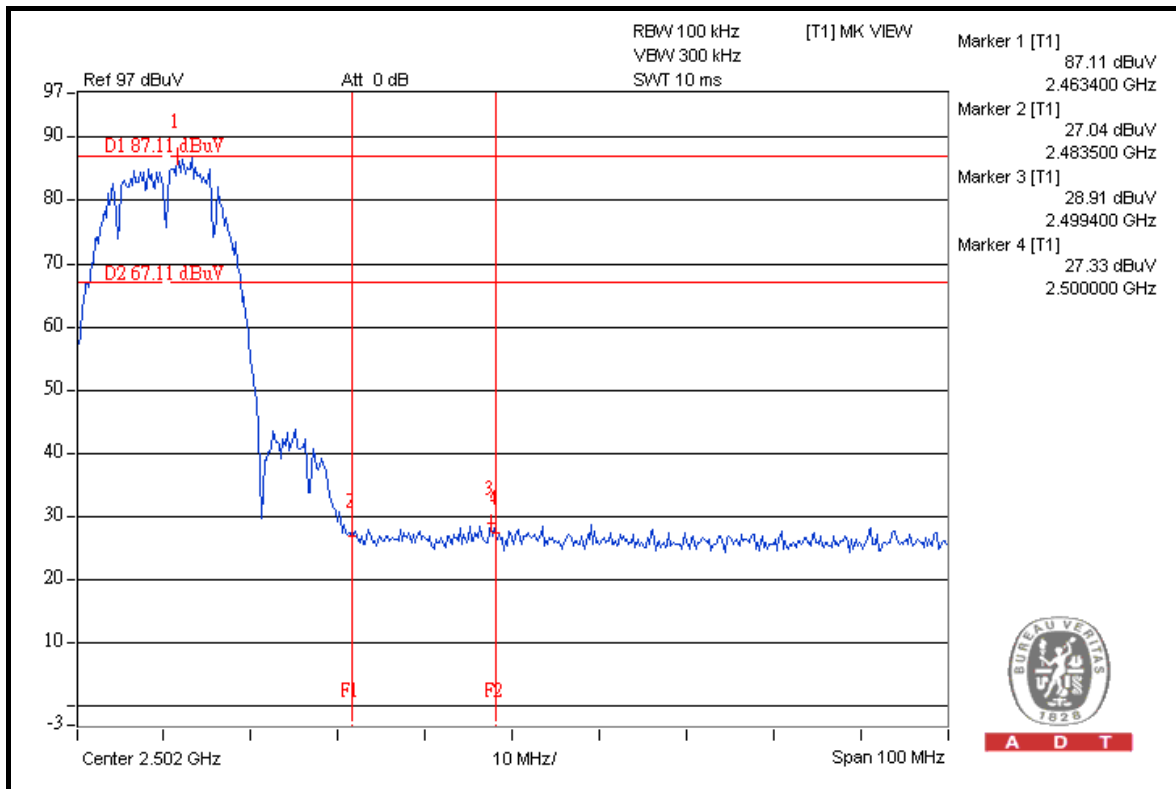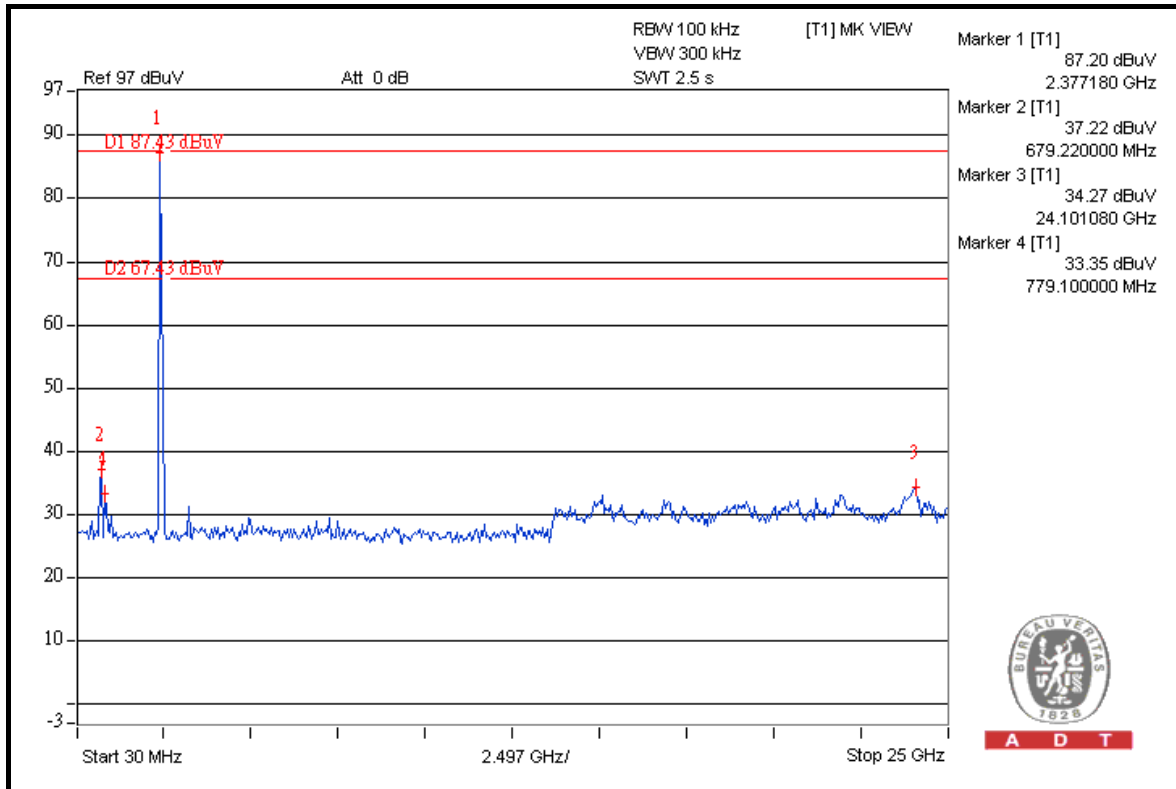



A D T

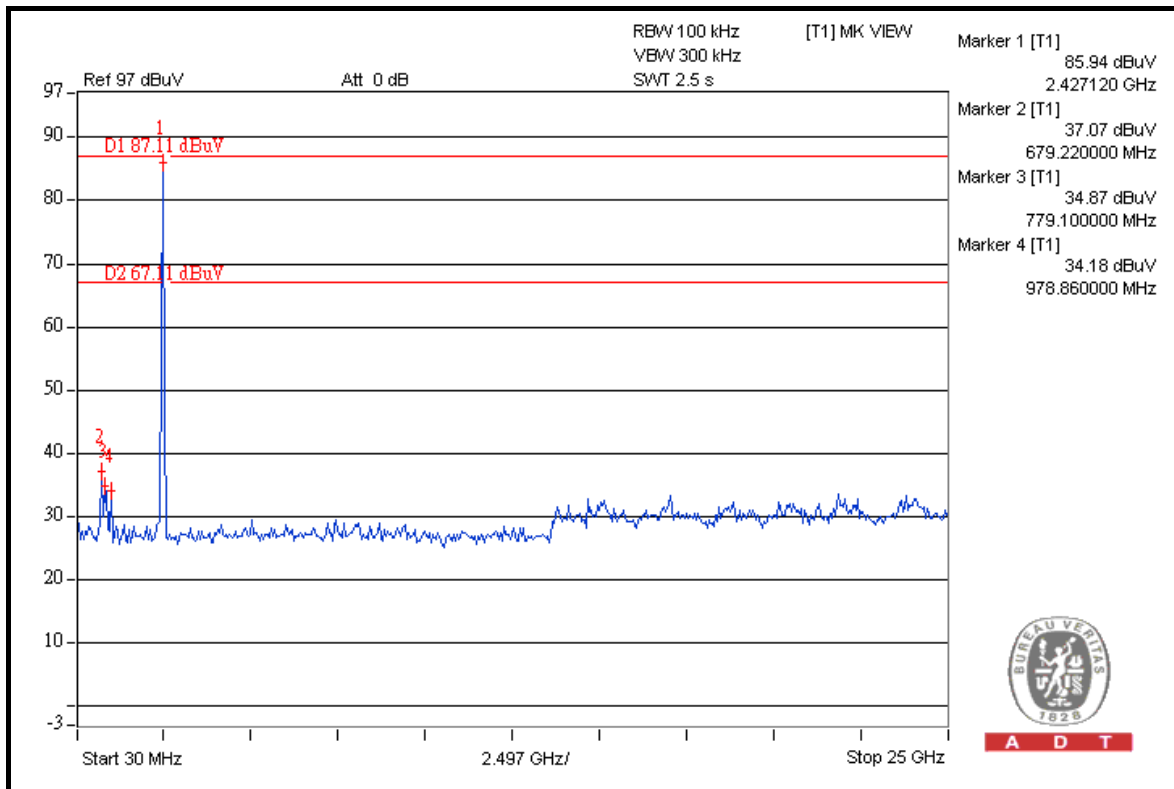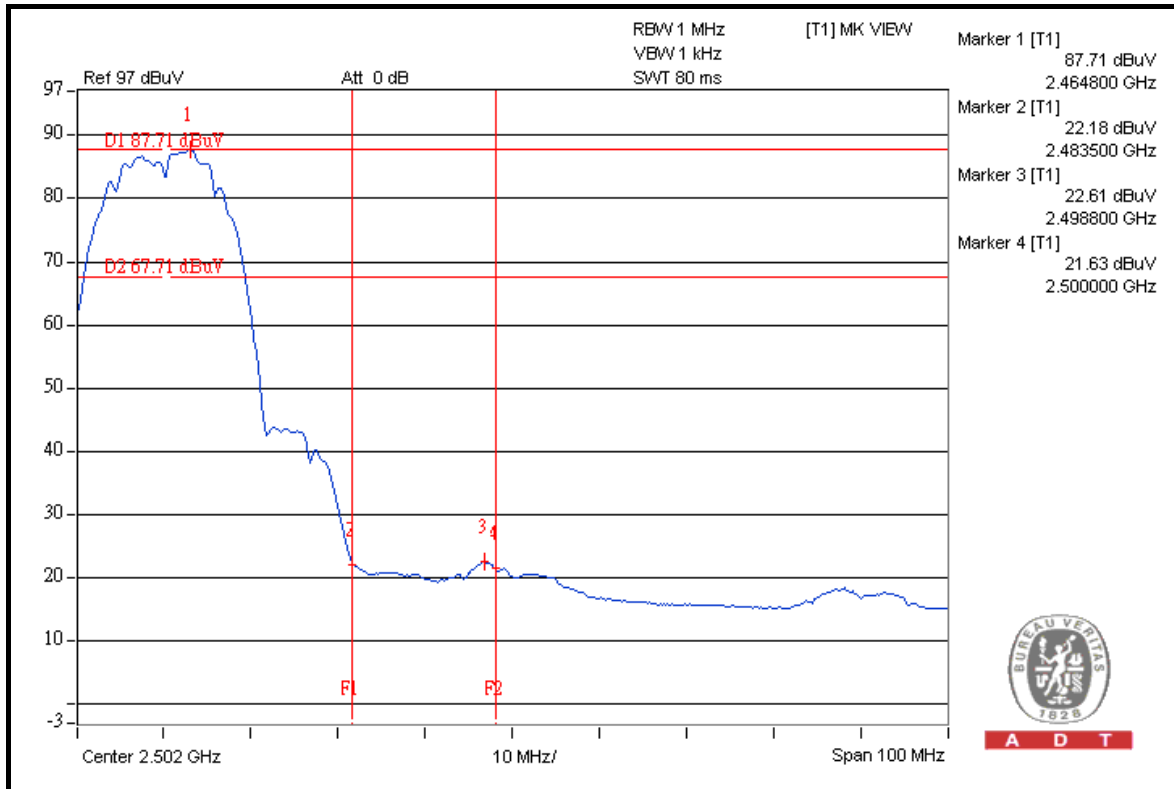



802.11g OFDM MODULATION

NOTE 1: The band edge emission plot on the next page shows 45.51dBc between carrier maximum power and local maximum emission in restrict band (2.3896GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 113.55dBuV/m (Peak), so the maximum field strength in restrict band is $113.55 - 45.51 = 68.04$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of on the next page shows 51.31dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 103.30dBuV/m (Average), so the maximum field strength in restrict band is $103.30 - 51.31 = 51.99$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 49.02dBc between carrier maximum power and local maximum emission in restrict band (2.4838GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 113.14dBuV/m (Peak), so the maximum field strength in restrict band is $113.14 - 49.02 = 64.12$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 53.37dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 103.07dBuV/m (Average), so the maximum field strength in restrict band is $103.07 - 53.37 = 49.70$ dBuV/m which is under 54dBuV/m limit.





A D T

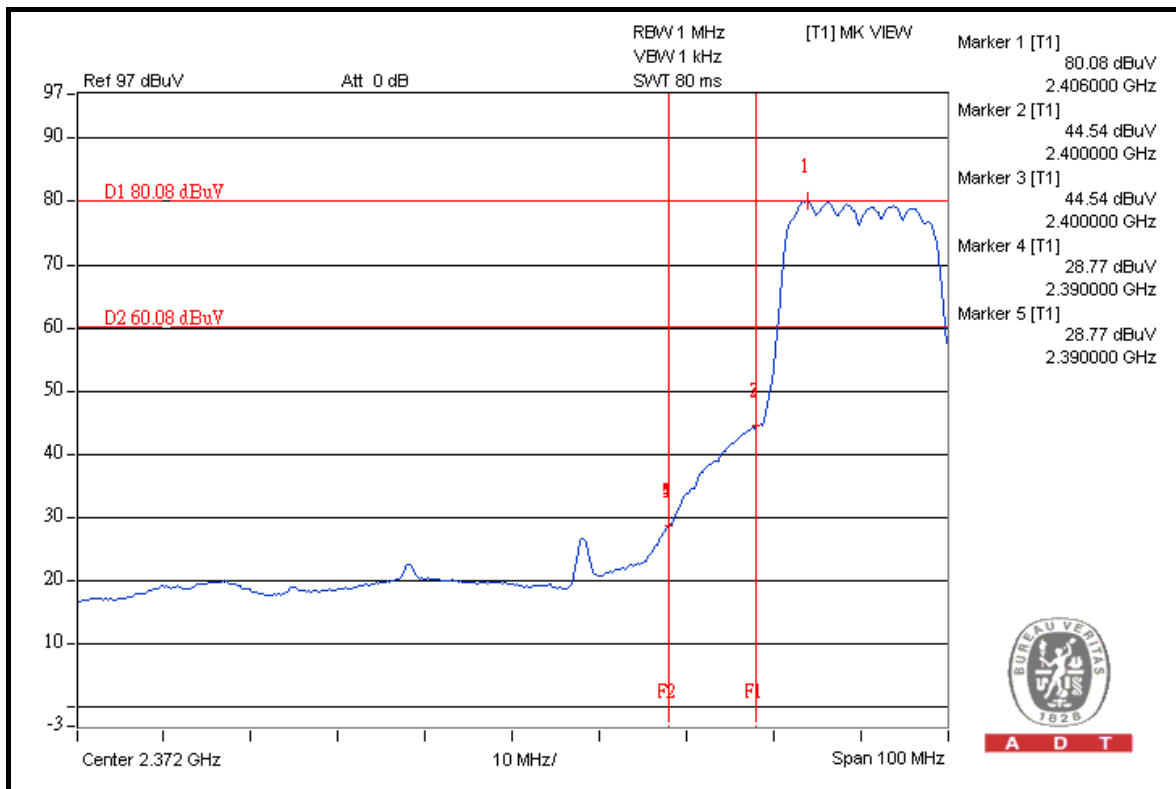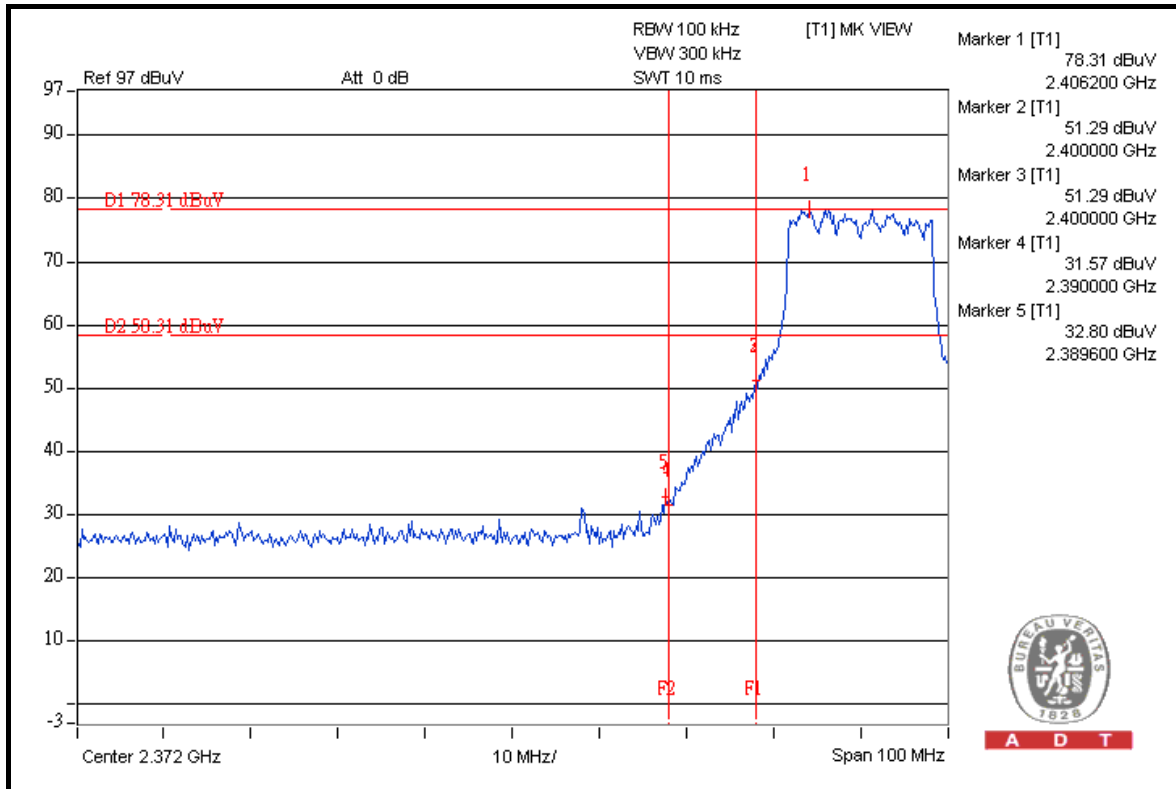




A D T

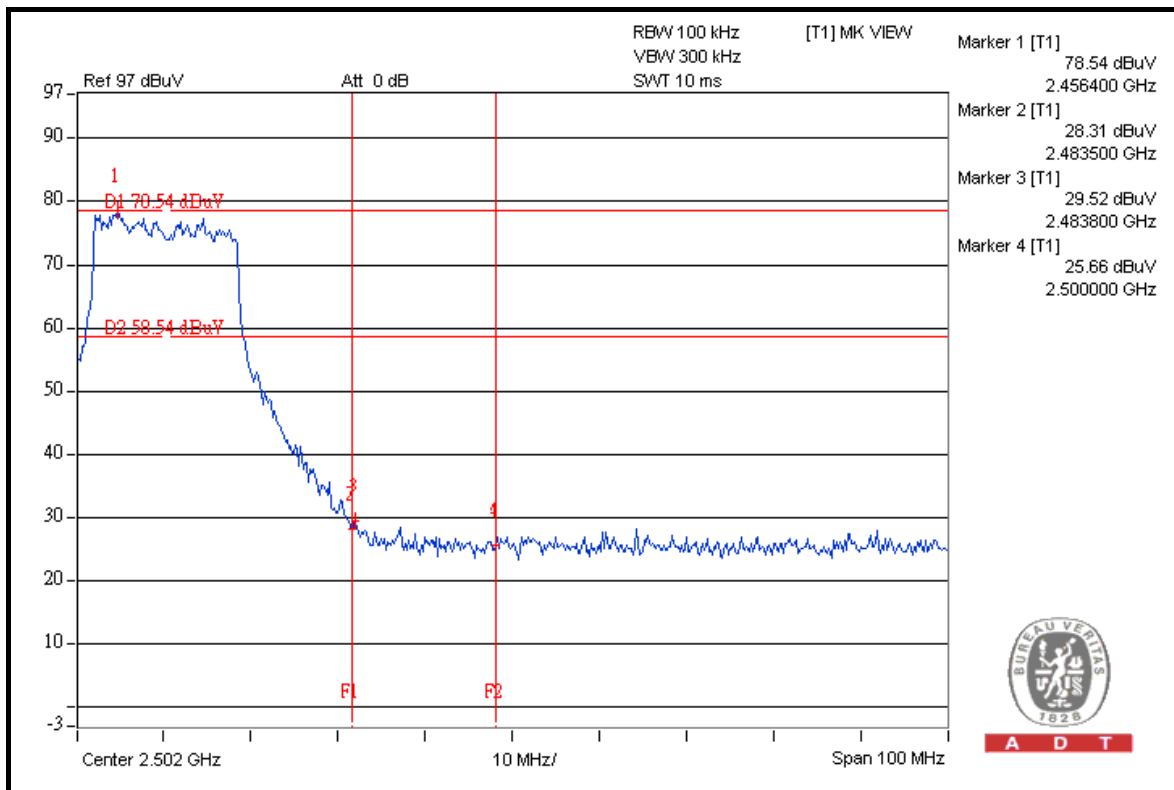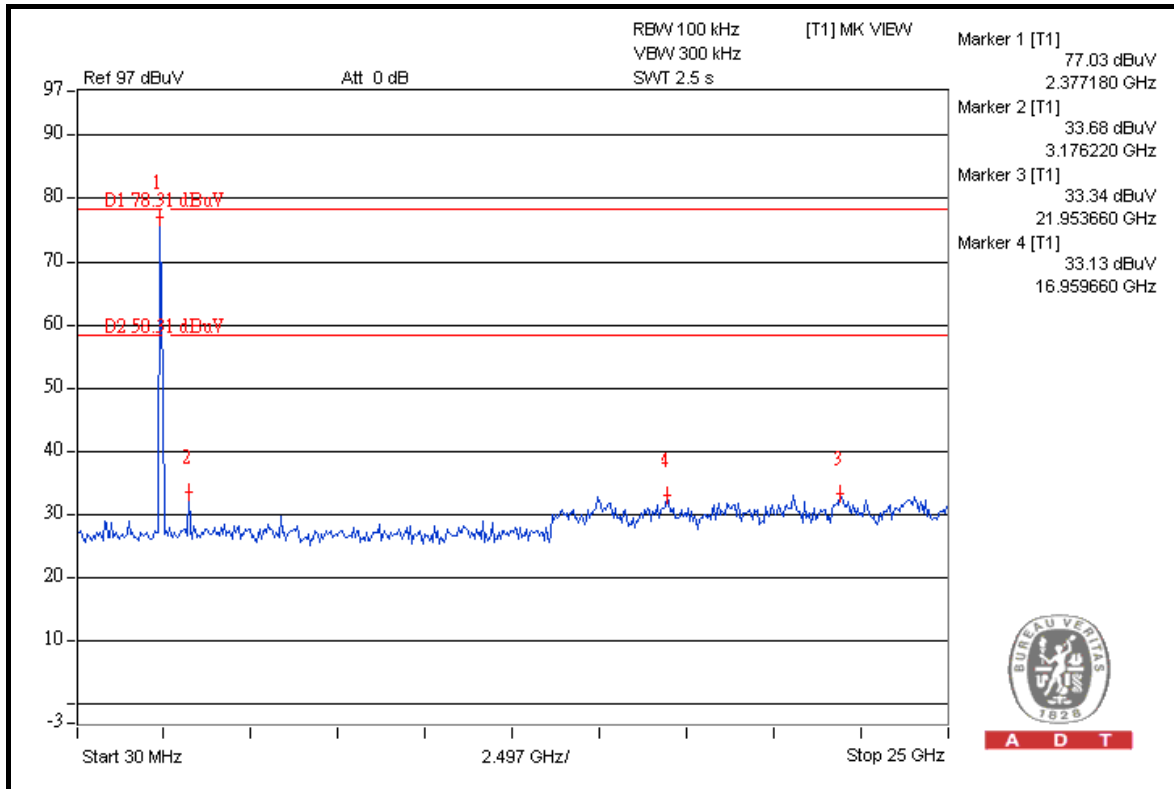




A D T

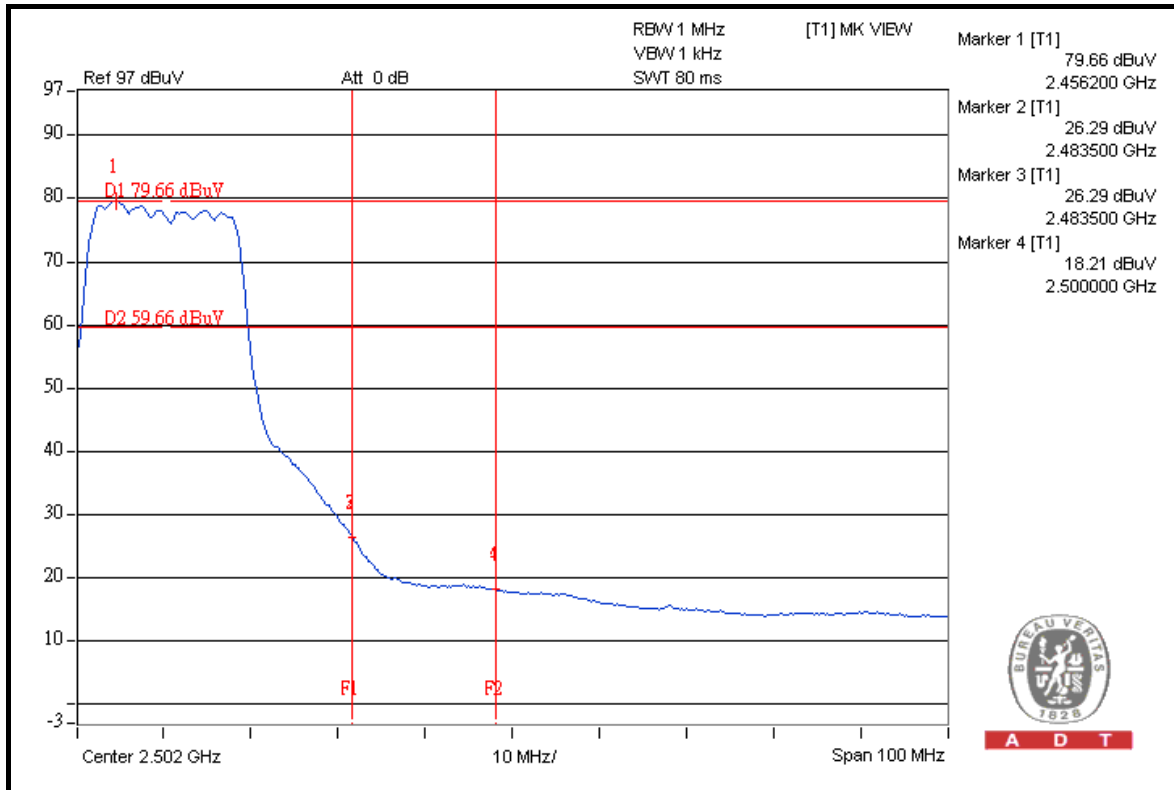

A D T

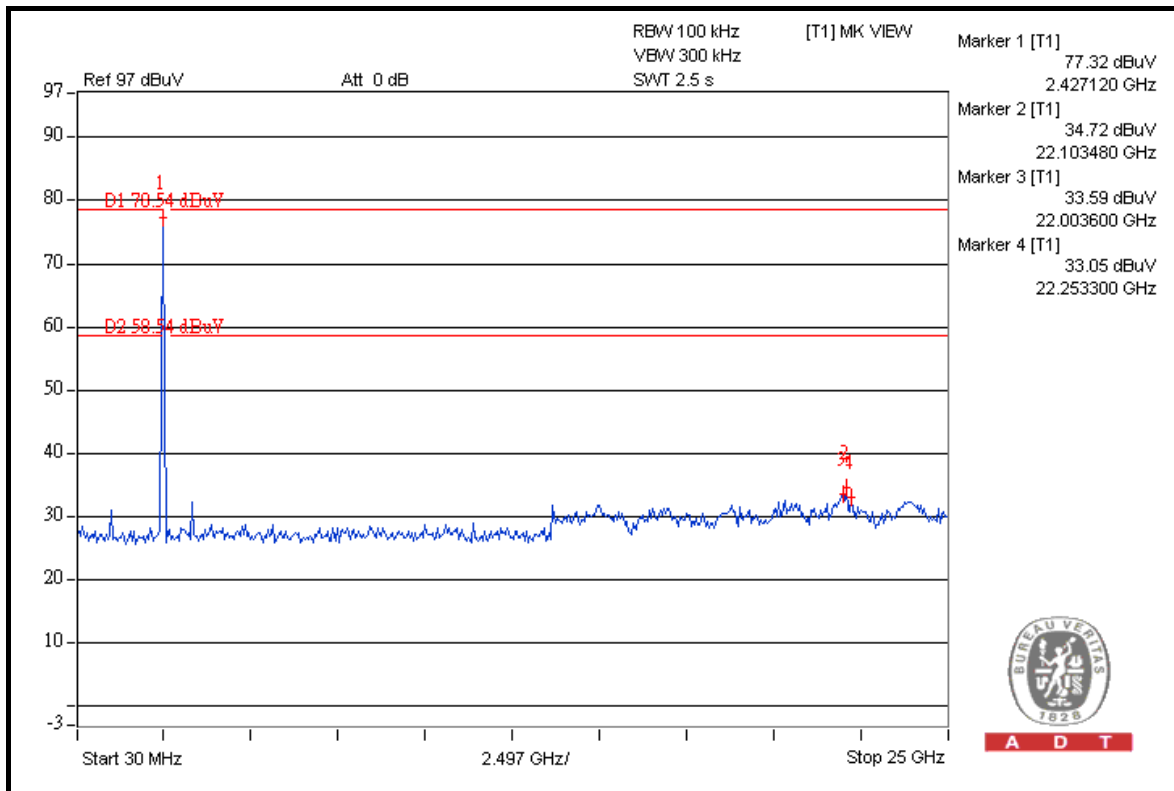

A D T



DRAFT 802.11n (20MHz) OFDM MODULATION

NOTE 1: The band edge emission plot on the next page shows 48.03dBc between carrier maximum power and local maximum emission in restrict band (2.3898GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 112.50dBuV/m (Peak), so the maximum field strength in restrict band is $112.50 - 48.03 = 64.47$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of on the next page shows 51.83dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 102.29dBuV/m (Average), so the maximum field strength in restrict band is $102.29 - 51.83 = 50.46$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 50.44dBc between carrier maximum power and local maximum emission in restrict band (2.4836GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 112.62dBuV/m (Peak), so the maximum field strength in restrict band is $112.62 - 50.44 = 62.18$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 52.51dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 102.47dBuV/m (Average), so the maximum field strength in restrict band is $102.47 - 52.51 = 49.96$ dBuV/m which is under 54dBuV/m limit.




A D T

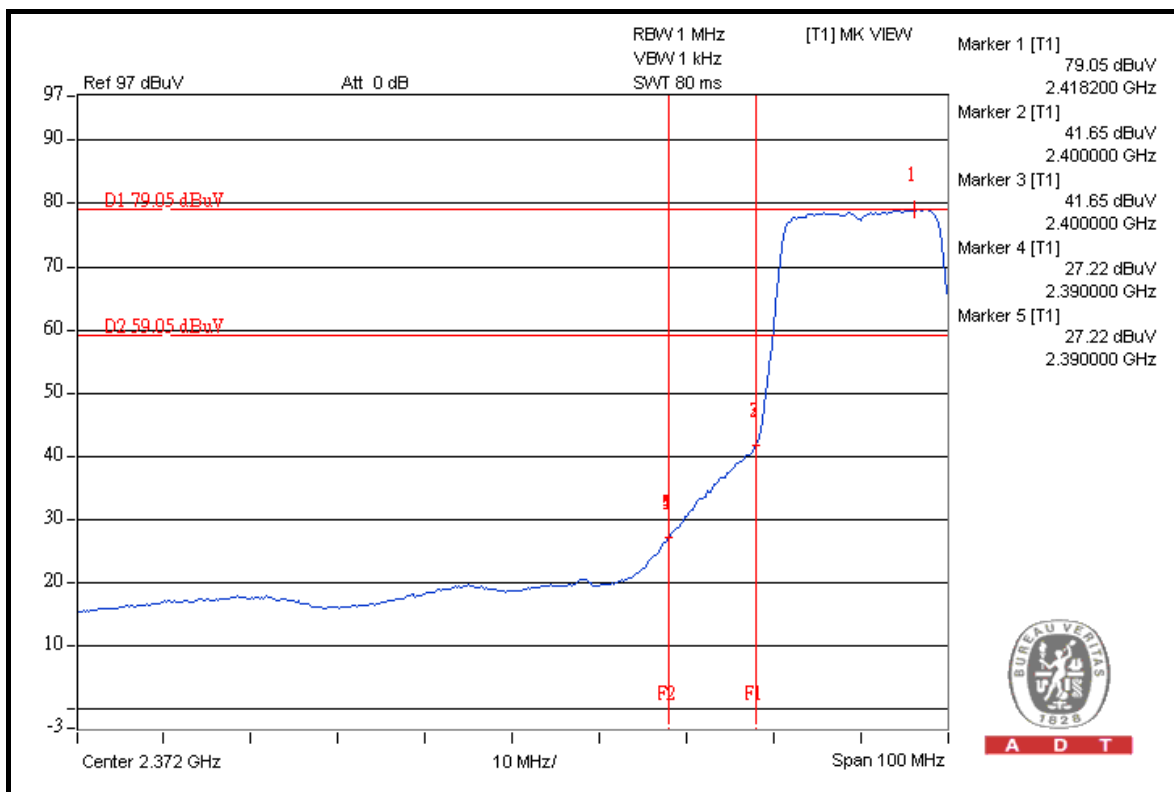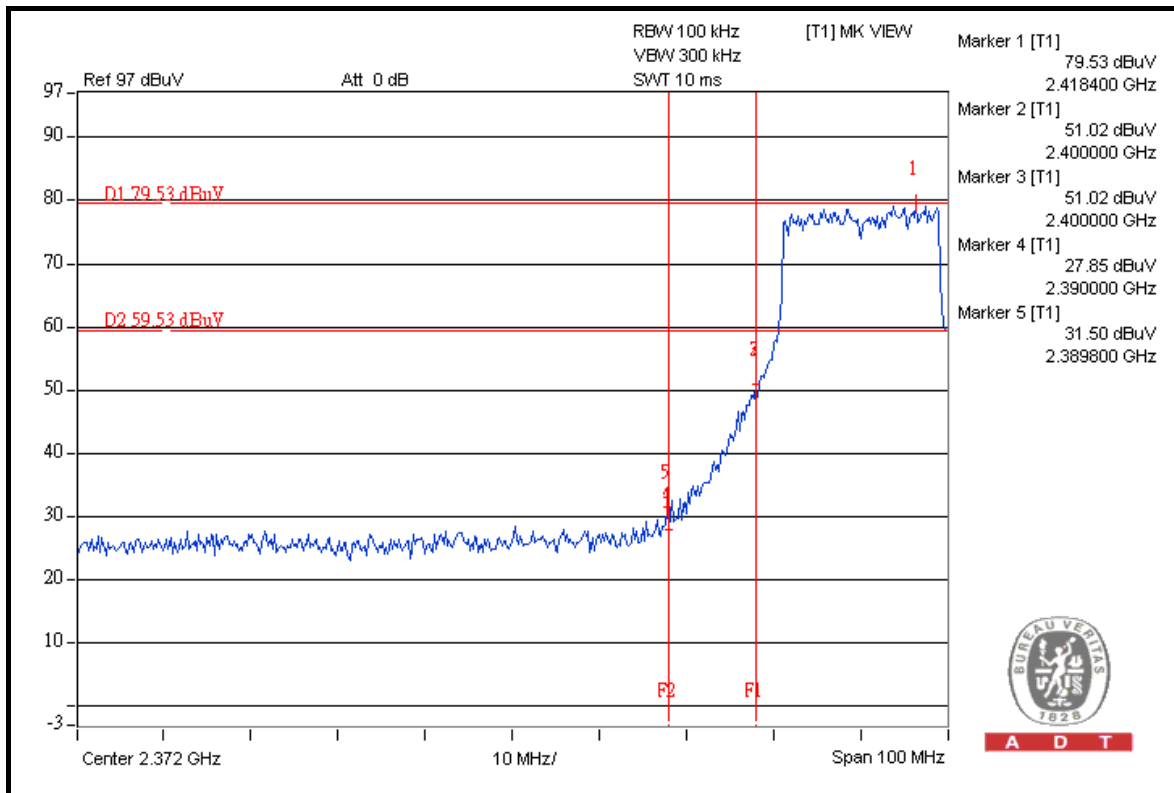




A D T

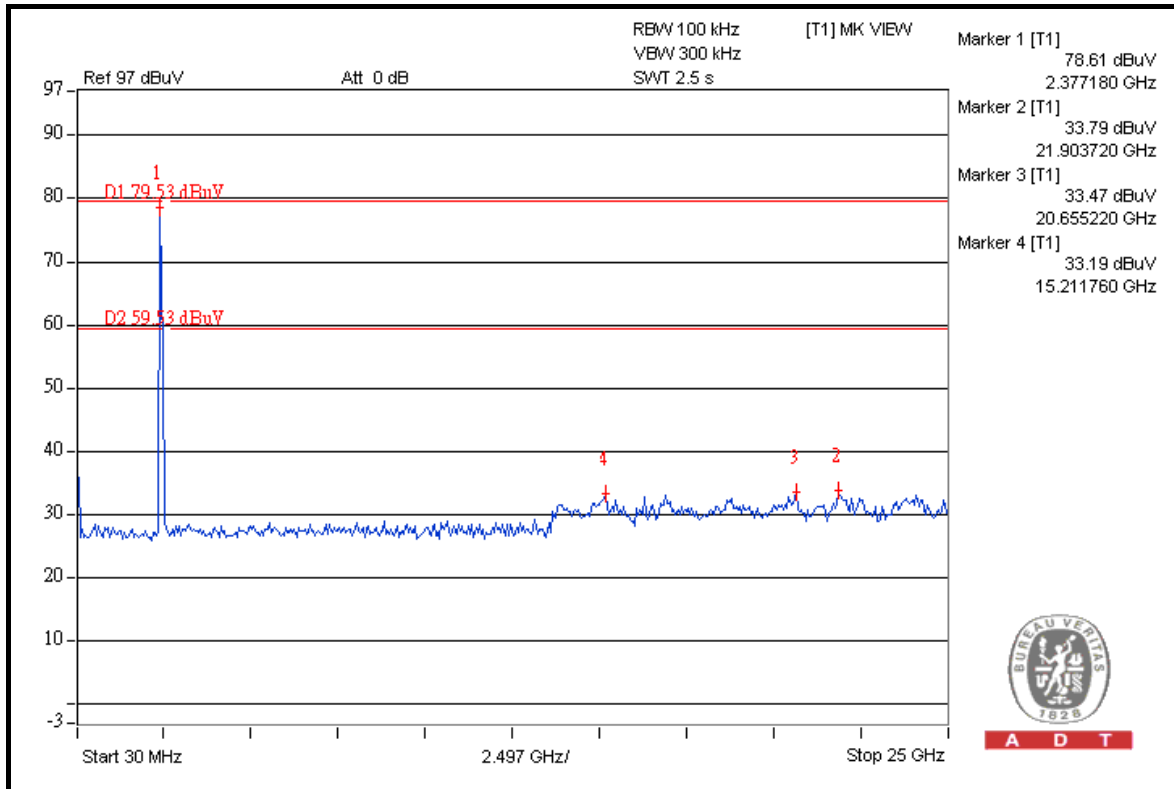



A D T

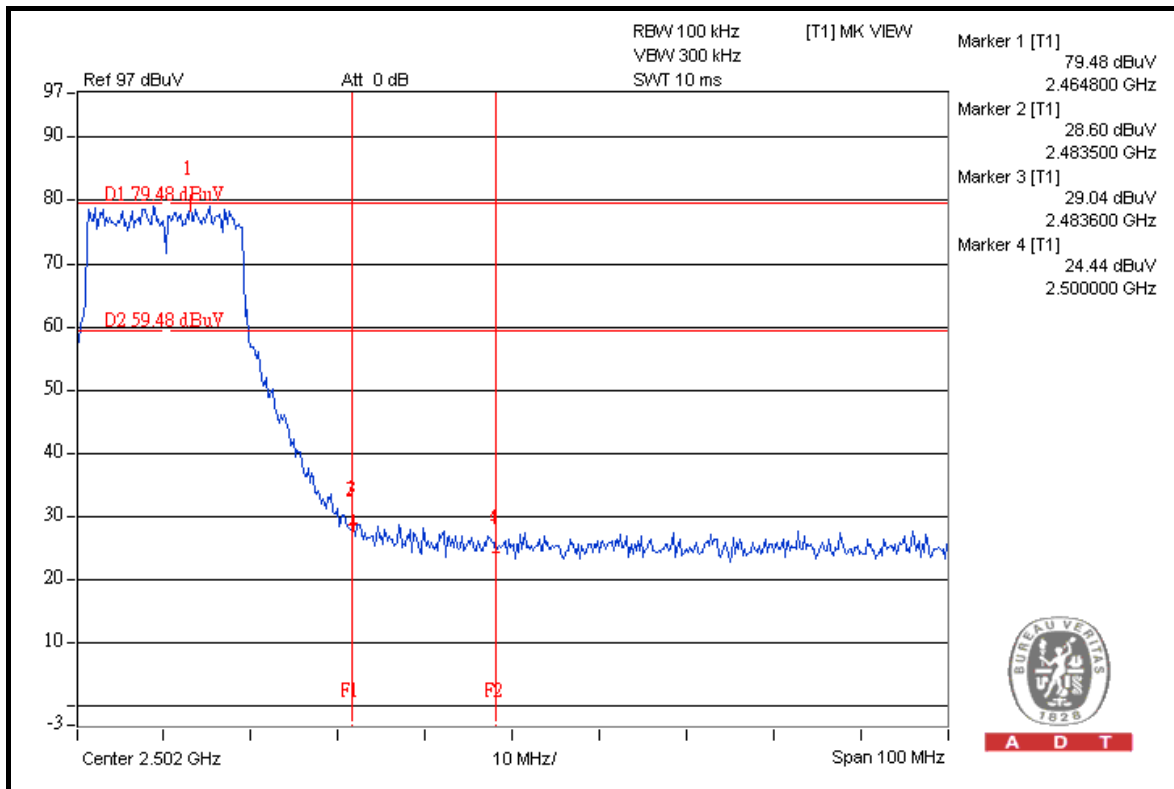

A D T



A D T

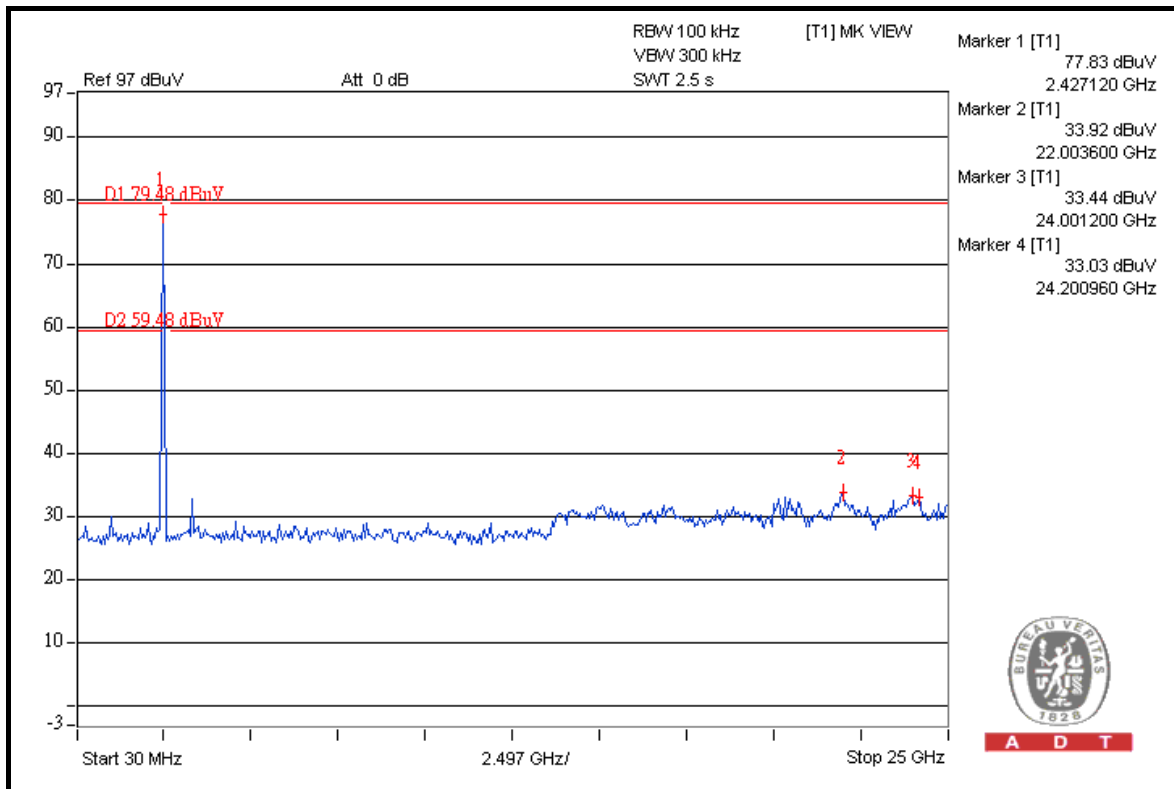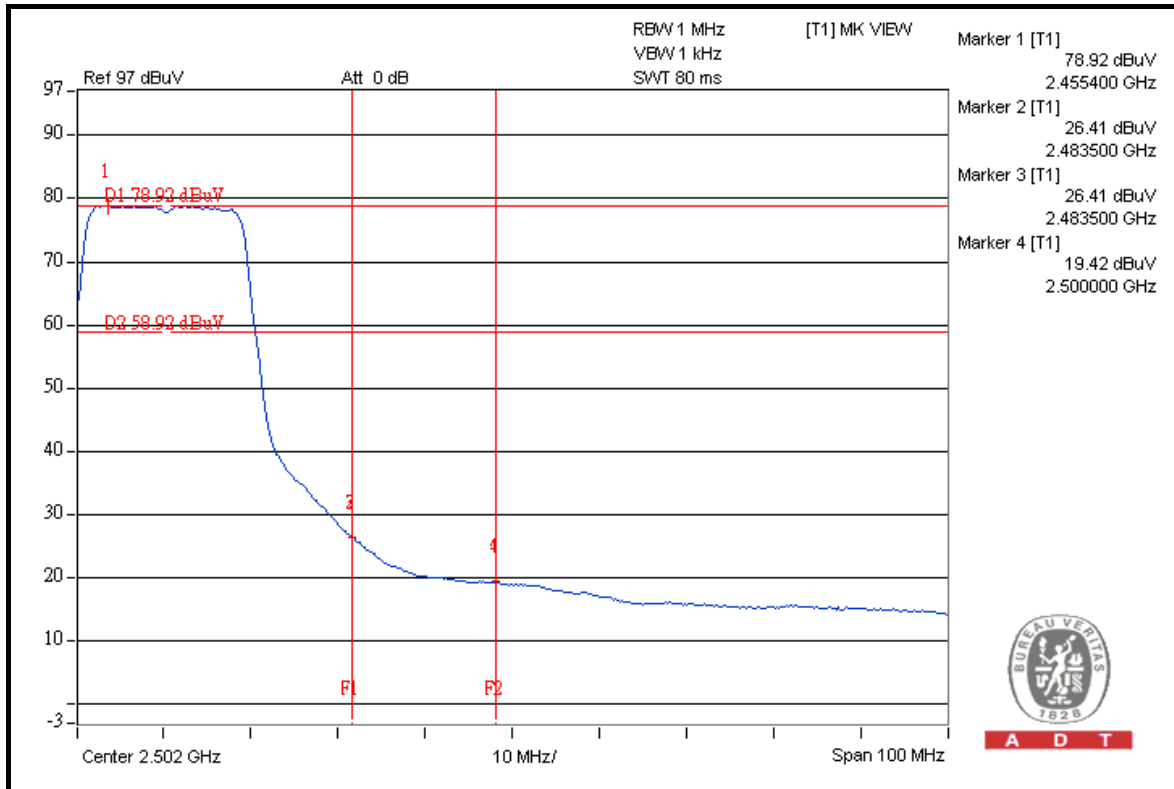



DRAFT 802.11n (40MHz) OFDM MODULATION

NOTE 1: The band edge emission plot on the next page shows 43.38dBc between carrier maximum power and local maximum emission in restrict band (2.3872GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 107.56dBuV/m (Peak), so the maximum field strength in restrict band is $107.56 - 43.38 = 64.18$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of on the next page shows 43.34dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 97.00dBuV/m (Average), so the maximum field strength in restrict band is $97.00 - 43.34 = 53.66$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 43.17dBc between carrier maximum power and local maximum emission in restrict band (2.4848GHz). The emission of carrier strength list in the test result of channel 7 at the item 4.1.7 is 106.72dBuV/m (Peak), so the maximum field strength in restrict band is $106.72 - 43.17 = 63.55$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 46.30dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 7 at the item 4.1.7 is 96.21dBuV/m (Average), so the maximum field strength in restrict band is $96.21 - 46.30 = 49.91$ dBuV/m which is under 54dBuV/m limit.





A D T

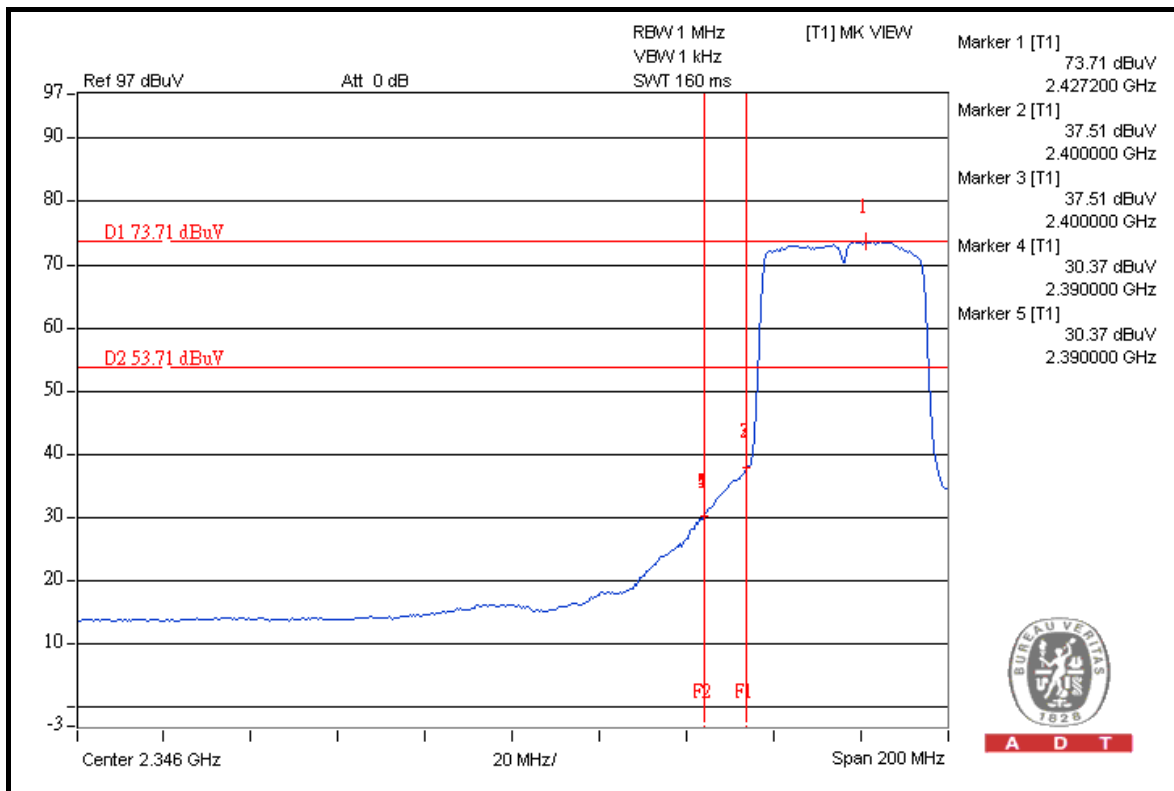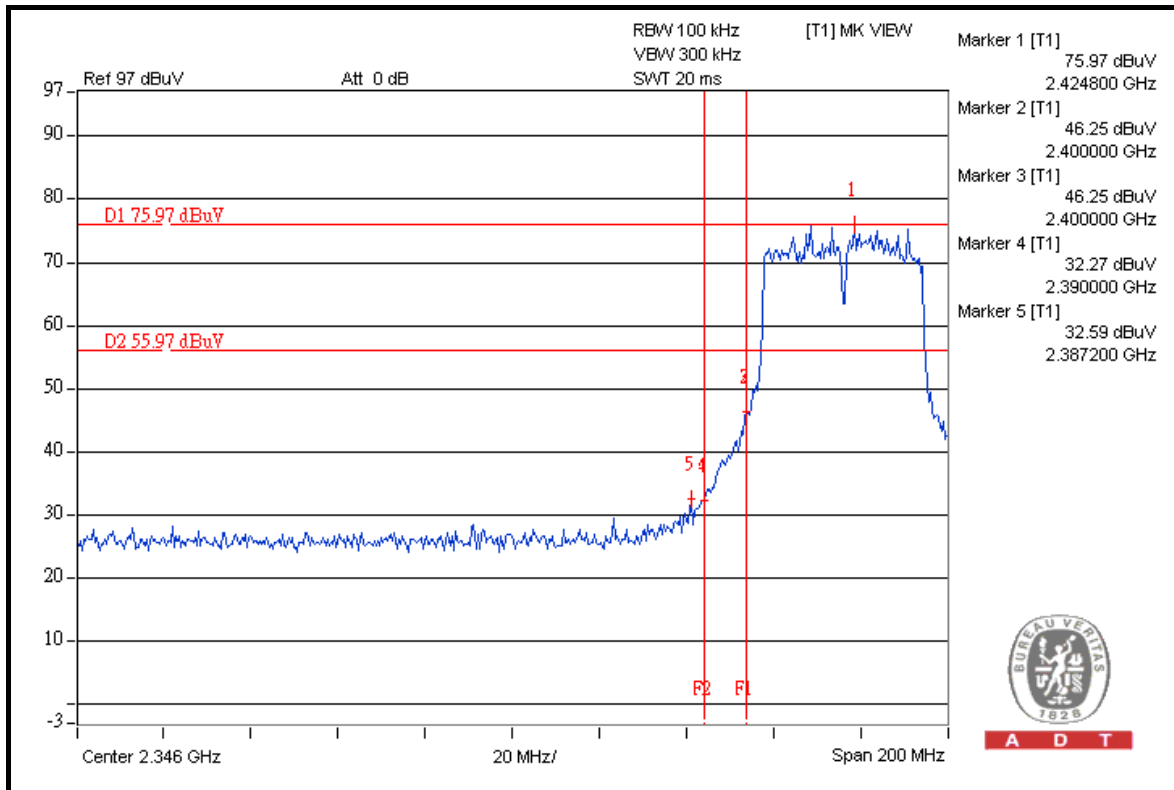




A D T

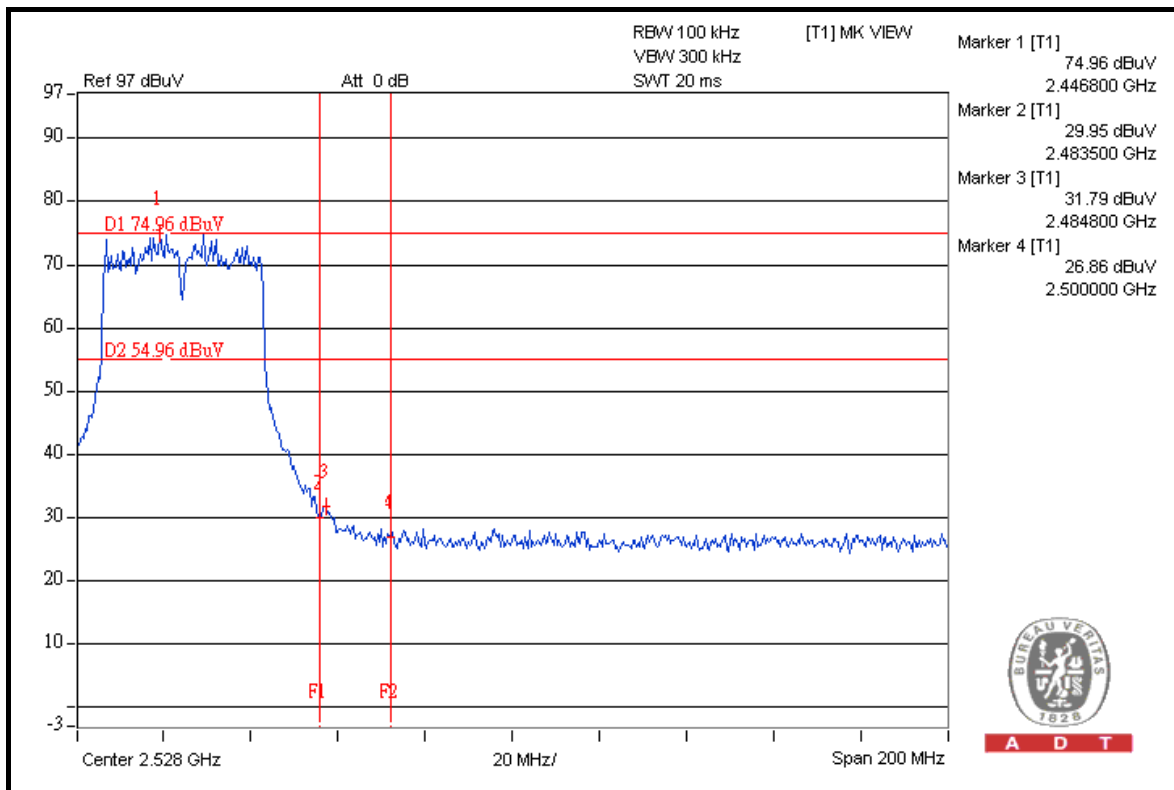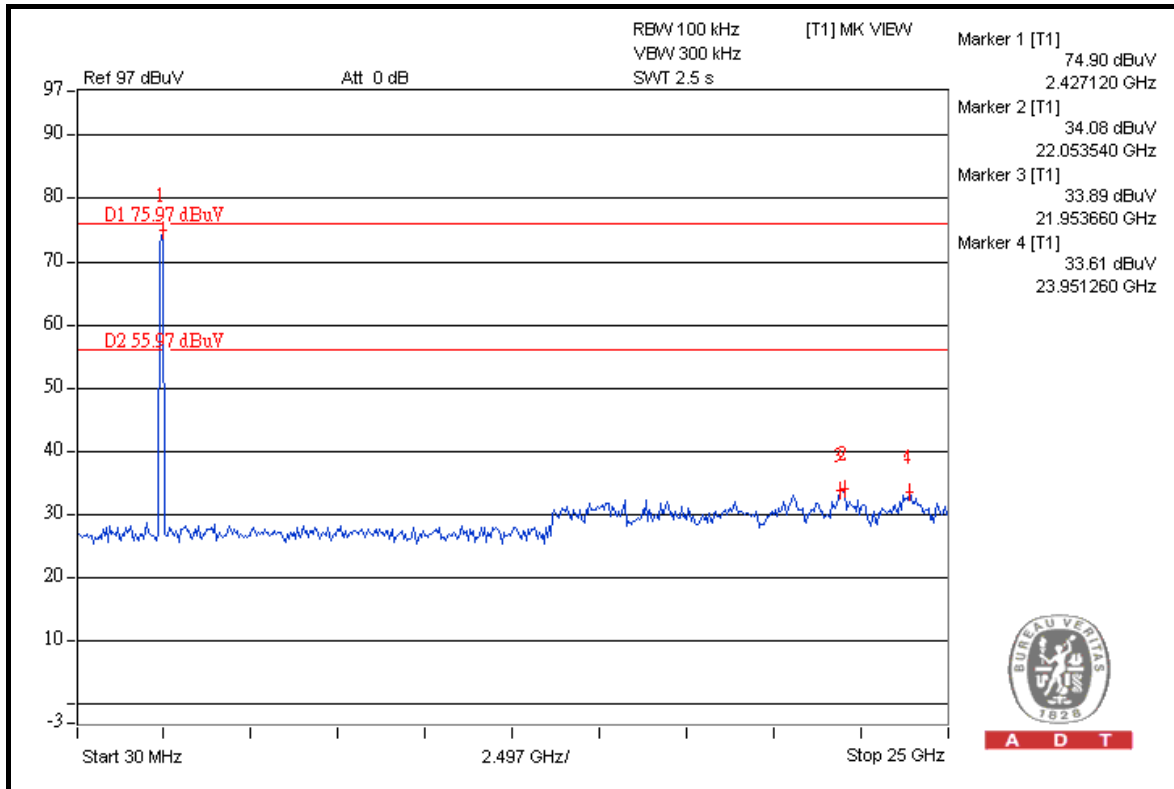




A D T

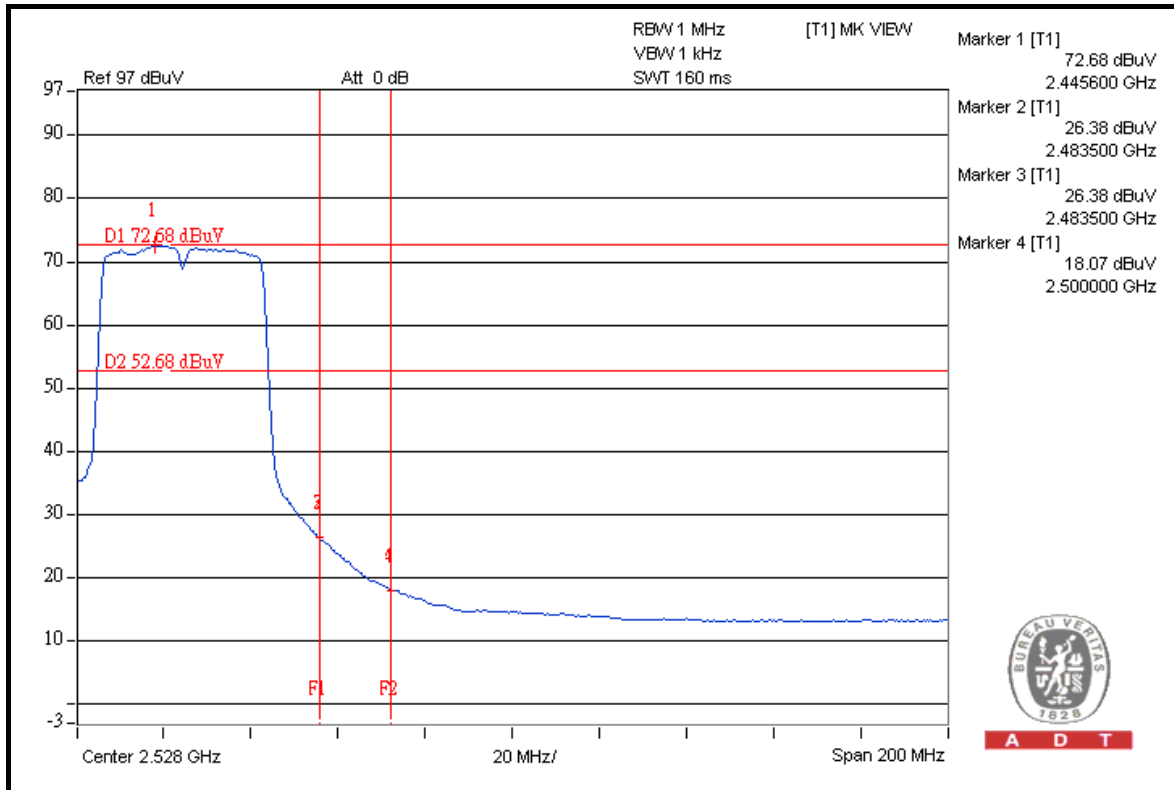

A D T

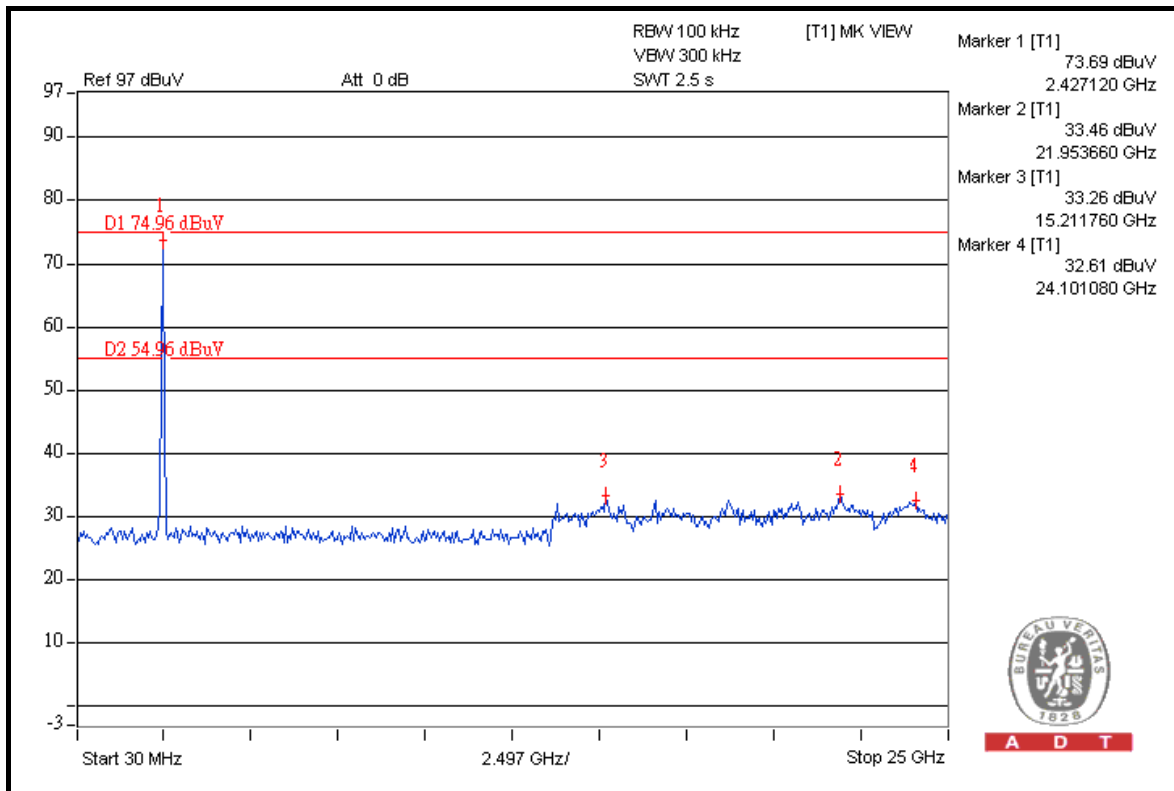

A D T



A D T

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is PIFA antenna with UFL connector. The maximum gain of the antenna is 4.19dBi.



5. TEST TYPES AND RESULTS (FOR 5.0GHz BAND)

5.1 RADIATED EMISSION MEASUREMENT

5.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

5.1.2 TEST INSTRUMENTS

Frequency above 1GHz

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100212	May 28, 2008	May 27, 2009
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Aug. 08, 2008	Aug. 07, 2009
BILOG Antenna SCHWARZBECK	VULB9168	9168-156	Apr. 25, 2008	Apr. 24, 2009
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 07, 2008	Jan. 06, 2009
Preamplifier Agilent	8449B	3008A01911	Sep. 10, 2008	Sep. 09, 2009
Preamplifier Agilent	8447D	2944A10638	Dec. 26, 2008	Dec. 25, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218190/4 231241/4	May 20, 2008	May 19, 2009
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Aug. 09, 2008	Aug. 08, 2009
Software	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn Table Controller EMCO	2090	NA	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 9.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 460141.
 5. The IC Site Registration No. is IC 7450F-4.



A D T

Frequency below 1GHz

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
ROHDE & SCHWARZ TEST RECEIVER	ESCI	100412	Jul. 22, 2008	Jul. 21, 2009
SCHAFFENR BILOG Antenna	CBL6111D	21872	Apr. 29, 2008	Apr. 28, 2009
CT Turn Table	TT100	NA	NA	NA
CT Tower	AT100	NA	NA	NA
Software	ADT_Radiated _V7.6.15.9.2	NA	NA	NA
ADT RF Switches BOX	EM-H-01-1	1002	Aug. 19, 2008	Aug. 18, 2009
TIMES RF cable	LMR-600	CABLE-ST5-01	Aug. 19, 2008	Aug. 18, 2009

- NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Open Site No. 5.
3. The VCCI Site Registration No. R-1039.
4. The Industry Canada Reference No. IC 7450E-5.



5.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber and a 10 meters open area site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 1KHz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

5.1.4 DEVIATION FROM TEST STANDARD


No deviation.

5.1.5 TEST SETUP

Frequency above 1GHz

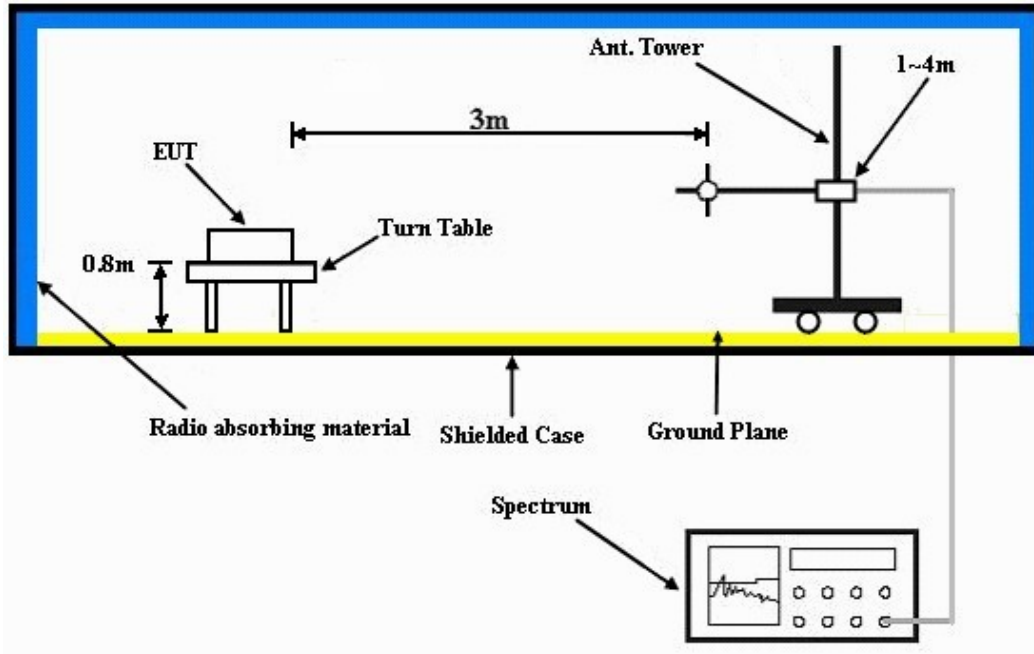

Frequency below 1GHz

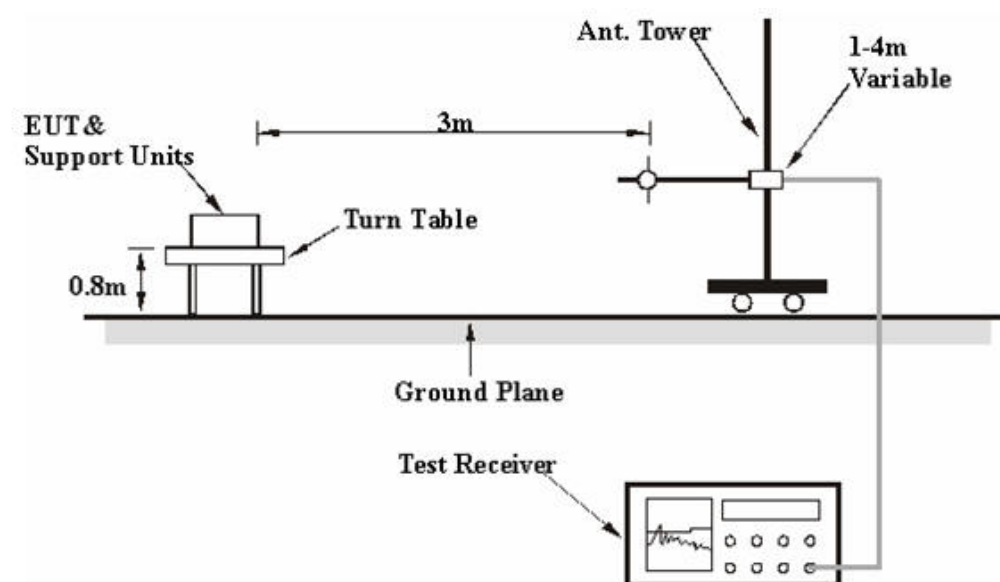

For the actual test configuration, please refer to the attached file (Test Setup Photo).

5.1.6 EUT OPERATING CONDITIONS

Same as 4.1.6.



5.1.7 TEST RESULTS

802.11a OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 998hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	84.67 PK	92.25	-7.58	1.38 H	84	44.07	40.60
2	#5725.00	66.50 AV	81.86	-15.36	1.38 H	84	25.90	40.60
3	*5745.00	112.25 PK			1.38 H	84	71.58	40.67
4	*5745.00	101.86 AV			1.38 H	84	61.19	40.67
5	11490.00	62.26 PK	74.00	-11.74	1.29 H	76	10.32	51.94
6	11490.00	49.15 AV	54.00	-4.85	1.29 H	76	-2.79	51.94
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	87.26 PK	96.05	-8.79	1.15 V	357	46.66	40.60
2	#5725.00	70.14 AV	85.09	-14.95	1.15 V	357	29.54	40.60
3	*5745.00	116.05 PK			1.15 V	357	75.38	40.67
4	*5745.00	105.09 AV			1.15 V	357	64.42	40.67
5	11490.00	68.29 PK	74.00	-5.71	1.43 V	97	16.35	51.94
6	11490.00	52.67 AV	54.00	-1.33	1.43 V	97	0.73	51.94

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The limit value is defined as per 15.247.
 7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 157	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 998hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	112.04 PK			1.41 H	78	71.22	40.82
2	*5785.00	101.48 AV			1.41 H	78	60.66	40.82
3	11570.00	61.90 PK	74.00	-12.10	1.42 H	360	10.04	51.86
4	11570.00	48.63 AV	54.00	-5.37	1.42 H	360	-3.23	51.86
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	116.10 PK			1.03 V	360	75.28	40.82
2	*5785.00	104.86 AV			1.03 V	360	64.04	40.82
3	11570.00	67.48 PK	74.00	-6.52	1.50 V	121	15.62	51.86
4	11570.00	52.52 AV	54.00	-1.48	1.50 V	121	0.66	51.86

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The limit value is defined as per 15.247.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 165	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 998hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	109.51 PK			1.37 H	98	68.62	40.89
2	*5825.00	99.42 AV			1.37 H	98	58.53	40.89
3	#5850.00	71.30 PK	89.51	-18.21	1.37 H	98	30.39	40.91
4	#5850.00	58.20 AV	79.42	-21.22	1.37 H	98	17.29	40.91
5	11650.00	60.66 PK	74.00	-13.34	1.44 H	129	8.93	51.73
6	11650.00	47.90 AV	54.00	-6.10	1.44 H	129	-3.83	51.73
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	114.46 PK			1.03 V	360	73.57	40.89
2	*5825.00	103.55 AV			1.03 V	360	62.66	40.89
3	#5850.00	72.37 PK	94.46	-22.09	1.03 V	356	31.46	40.91
4	#5850.00	59.70 AV	83.55	-23.85	1.03 V	356	18.79	40.91
5	11650.00	67.72 PK	74.00	-6.28	1.62 V	87	15.99	51.73
6	11650.00	52.80 AV	54.00	-1.20	1.62 V	87	1.07	51.73

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The limit value is defined as per 15.247.
 7. "#":The radiated frequency is out the restricted band.



A D T

DRAFT 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 998hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	88.43 PK	93.04	-4.61	1.42 H	84	47.83	40.60
2	#5725.00	69.80 AV	82.46	-12.66	1.42 H	84	29.20	40.60
3	*5745.00	113.04 PK			1.38 H	84	72.37	40.67
4	*5745.00	102.46 AV			1.38 H	84	61.79	40.67
5	11490.00	62.56 PK	74.00	-11.44	1.40 H	358	10.62	51.94
6	11490.00	48.99 AV	54.00	-5.01	1.40 H	358	-2.95	51.94
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	90.34 PK	96.01	-5.67	1.04 V	15	49.74	40.60
2	#5725.00	71.31 AV	84.95	-13.64	1.04 V	15	30.71	40.60
3	*5745.00	116.01 PK			1.05 V	0	75.34	40.67
4	*5745.00	104.95 AV			1.05 V	0	64.28	40.67
5	11490.00	63.74 PK	74.00	-10.26	1.60 V	356	11.80	51.94
6	11490.00	50.84 AV	54.00	-3.16	1.60 V	356	-1.10	51.94

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The limit value is defined as per 15.247.
 7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 157	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 998hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	113.06 PK			1.40 H	97	72.24	40.82
2	*5785.00	101.74 AV			1.40 H	97	60.92	40.82
3	11570.00	62.76 PK	74.00	-11.24	1.28 H	78	10.90	51.86
4	11570.00	49.73 AV	54.00	-4.27	1.28 H	78	-2.13	51.86
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	116.17 PK			1.04 V	6	75.35	40.82
2	*5785.00	105.36 AV			1.04 V	6	64.54	40.82
3	11570.00	65.18 PK	74.00	-8.82	1.51 V	358	13.32	51.86
4	11570.00	51.29 AV	54.00	-2.71	1.51 V	358	-0.57	51.86

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The limit value is defined as per 15.247.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 165	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 998hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	111.14 PK			1.63 H	124	70.25	40.89
2	*5825.00	100.96 AV			1.63 H	124	60.07	40.89
3	#5850.00	73.44 PK	91.14	-17.70	1.63 H	124	32.53	40.91
4	#5850.00	59.18 AV	80.96	-21.78	1.63 H	124	18.27	40.91
5	11650.00	60.63 PK	74.00	-13.37	1.24 H	138	8.90	51.73
6	11650.00	48.03 AV	54.00	-5.97	1.24 H	138	-3.70	51.73
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	114.42 PK			1.04 V	3	73.53	40.89
2	*5825.00	103.50 AV			1.04 V	3	62.61	40.89
3	#5850.00	76.42 PK	94.42	-18.00	1.04 V	3	35.51	40.91
4	#5850.00	60.12 AV	83.50	-23.38	1.04 V	3	19.21	40.91
5	11650.00	63.31 PK	74.00	-10.69	1.29 V	124	11.58	51.73
6	11650.00	50.35 AV	54.00	-3.65	1.29 V	124	-1.38	51.73

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The limit value is defined as per 15.247.
 7. “#”:The radiated frequency is out the restricted band.



A D T

DRAFT 802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 151	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 998hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	85.50 PK	90.81	-5.31	1.00 H	145	44.90	40.60
2	#5725.00	70.79 AV	79.98	-9.19	1.00 H	145	30.19	40.60
3	*5755.00	110.81 PK			1.42 H	113	70.10	40.71
4	*5755.00	99.98 AV			1.42 H	113	59.27	40.71
5	11510.00	61.41 PK	74.00	-12.59	1.23 H	17	9.47	51.94
6	11510.00	49.04 AV	54.00	-4.96	1.23 H	17	-2.90	51.94
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	90.50 PK	93.78	-3.28	1.40 V	109	49.90	40.60
2	#5725.00	75.84 AV	82.91	-7.07	1.40 V	109	35.24	40.60
3	*5755.00	113.78 PK			1.04 V	360	73.07	40.71
4	*5755.00	102.91 AV			1.04 V	360	62.20	40.71
5	11510.00	61.13 PK	74.00	-12.87	1.27 V	294	9.19	51.94
6	11510.00	48.57 AV	54.00	-5.43	1.27 V	294	-3.37	51.94

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The limit value is defined as per 15.247.
 7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 159	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 998hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	110.69 PK			1.64 H	85	69.84	40.85
2	*5795.00	100.01 AV			1.64 H	85	59.16	40.85
3	#5850.00	73.02 PK	90.69	-17.67	1.64 H	85	32.11	40.91
4	#5850.00	59.71 AV	80.01	-20.30	1.64 H	85	18.80	40.91
5	11590.00	62.49 PK	74.00	-11.51	1.40 H	358	10.66	51.83
6	11590.00	49.45 AV	54.00	-4.55	1.40 H	358	-2.38	51.83
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	113.55 PK			1.37 V	353	72.70	40.85
2	*5795.00	102.77 AV			1.37 V	353	61.92	40.85
3	#5850.00	76.49 PK	93.55	-17.06	1.36 V	350	35.58	40.91
4	#5850.00	60.23 AV	82.77	-22.54	1.36 V	350	19.32	40.91
5	11590.00	65.56 PK	74.00	-8.44	1.45 V	151	13.73	51.83
6	11590.00	52.18 AV	54.00	-1.82	1.45 V	151	0.35	51.83

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. The limit value is defined as per 15.247.
 7. "#":The radiated frequency is out the restricted band.



A D T

BELOW 1GHz WORST-CASE DATA : DRAFT 802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 151	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	15deg. C, 75%RH 999hPa	TEST MODE	A
TESTED BY	Vincent Lin		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	100.01	34.05 QP	43.50	-9.45	1.38 H	81	23.58	10.47
2	155.62	30.16 QP	43.50	-13.34	1.00 H	209	17.37	12.80
3	340.00	38.91 QP	46.00	-7.09	1.58 H	229	22.61	16.30
4	400.01	38.10 QP	46.00	-7.90	1.00 H	197	19.90	18.20
5	666.65	39.19 QP	46.00	-6.81	1.46 H	52	14.14	25.05
6	679.99	44.89 QP	46.00	-1.11	2.08 H	315	19.73	25.16
7	850.00	37.91 QP	46.00	-8.09	1.66 H	232	10.47	27.44
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	53.18	30.99 QP	40.00	-9.01	1.00 V	174	22.74	8.25
2	340.01	35.91 QP	46.00	-10.09	1.00 V	275	19.61	16.30
3	400.00	42.15 QP	46.00	-3.85	1.82 V	200	23.95	18.20
4	525.00	44.15 QP	46.00	-1.85	2.64 V	337	22.58	21.57
5	679.99	43.16 QP	46.00	-2.84	1.44 V	290	18.00	25.16
6	799.00	35.91 QP	46.00	-10.09	1.74 V	149	8.71	27.20

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 151	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	15deg. C, 75%RH 999hPa	TEST MODE	B
TESTED BY	Vincent Lin		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	100.01	36.94 QP	43.50	-6.56	1.15 H	216	26.47	10.47
2	159.26	32.95 QP	43.50	-10.55	1.00 H	173	20.04	12.91
3	340.00	40.15 QP	46.00	-5.85	2.55 H	64	23.85	16.30
4	400.00	37.51 QP	46.00	-8.49	1.85 H	95	19.31	18.20
5	433.32	36.89 QP	46.00	-9.11	1.43 H	318	17.87	19.02
6	650.01	39.52 QP	46.00	-6.48	1.38 H	258	14.62	24.90
7	666.66	38.99 QP	46.00	-7.01	2.36 H	249	13.94	25.05
8	680.00	44.87 QP	46.00	-1.13	2.09 H	94	19.71	25.16
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	53.61	33.59 QP	40.00	-6.41	1.00 V	264	25.49	8.10
2	150.01	34.61 QP	43.50	-8.89	1.00 V	3	21.98	12.63
3	399.99	42.16 QP	46.00	-3.84	2.39 V	43	23.96	18.20
4	525.01	44.15 QP	46.00	-1.85	2.61 V	337	22.58	21.57
5	575.01	40.05 QP	46.00	-5.95	1.00 V	36	16.69	23.36
6	680.01	41.76 QP	46.00	-4.24	1.00 V	323	16.60	25.16
7	800.01	38.05 QP	46.00	-7.95	1.32 V	303	10.83	27.22

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



5.2 CONDUCTED EMISSION MEASUREMENT

5.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

5.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 19, 2008	Nov. 18, 2009
RF signal cable Woken	5D-FB	Cable-HYC01-01	Jan. 04, 2008	Jan. 03, 2009
LISN ROHDE & SCHWARZ	ESH3-Z5	100312	Jun. 13, 2008	Jun. 12, 2009
V-LISN SCHWARZBECK	NNBL 8226-2	8226-142	Jun. 10, 2008	Jun. 09, 2009
Software ADT	ADT_Cond_V3	NA	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 1.
3. The VCCI Site Registration No. is C-2040.



A D T


5.2.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

5.2.4 DEVIATION FROM TEST STANDARD

No deviation.

5.2.5 TEST SETUP

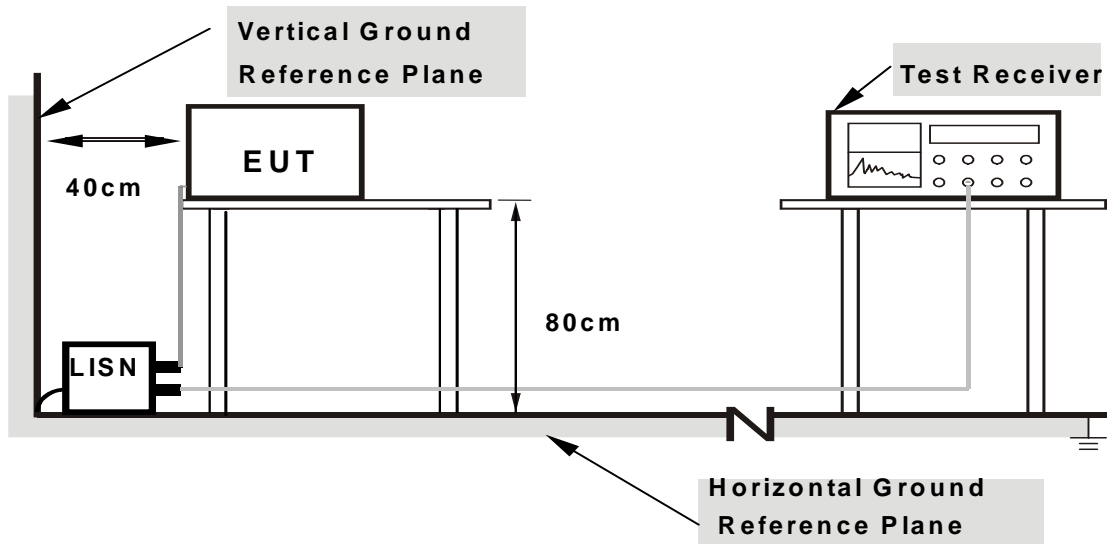

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

5.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6


5.2.7 TEST RESULTS

CONDUCTED WORST-CASE DATA: DRAFT 802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 151	PHASE	Line 1
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	15Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH, 1021hPa	TEST MODE	A
TESTED BY	Antony Lee		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.150	0.13	47.42	-	47.55	-	66.00
2	0.205	0.13	37.65	-	37.78	-	63.42	53.42	-25.64	-
3	0.361	0.14	34.53	-	34.67	-	58.71	48.71	-24.04	-
4	2.195	0.25	25.17	-	25.42	-	56.00	46.00	-30.58	-
5	3.172	0.33	26.97	-	27.30	-	56.00	46.00	-28.70	-
6	21.465	1.19	35.62	-	36.81	-	60.00	50.00	-23.19	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

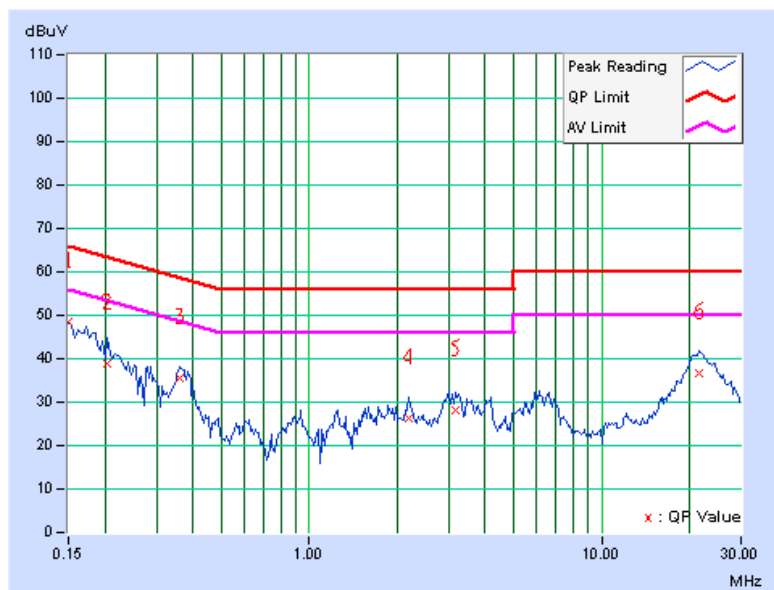




A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 151	PHASE	Line 2
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	15Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH, 1021hPa	TEST MODE	A
TESTED BY	Antony Lee		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.14	47.07	-	47.21	-	66.00	56.00	-18.79	-
2	0.185	0.15	41.43	-	41.58	-	64.25	54.25	-22.67	-
3	0.357	0.16	33.50	-	33.66	-	58.80	48.80	-25.14	-
4	0.818	0.19	26.64	-	26.83	-	56.00	46.00	-29.17	-
5	4.195	0.43	27.95	-	28.38	-	56.00	46.00	-27.62	-
6	21.781	0.96	34.85	-	35.81	-	60.00	50.00	-24.19	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

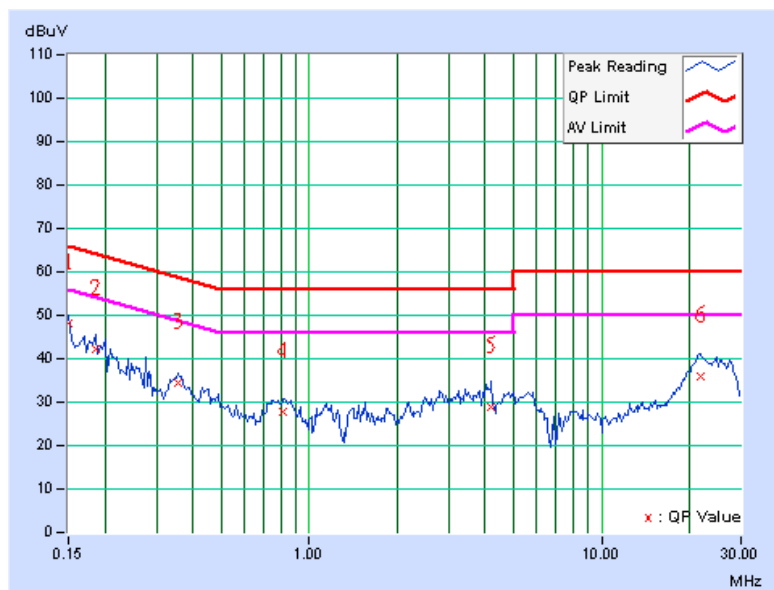

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 151	PHASE	Line 1
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	15Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH, 1021hPa	TEST MODE	B
TESTED BY	Antony Lee		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.13	45.11	-	45.24	-	65.79	55.79	-20.55	-
2	0.189	0.13	46.64	-	46.77	-	64.08	54.08	-17.31	-
3	0.240	0.13	41.23	-	41.36	-	62.10	52.10	-20.74	-
4	0.279	0.13	36.24	-	36.37	-	60.85	50.85	-24.47	-
5	0.568	0.15	41.12	-	41.27	-	56.00	46.00	-14.73	-
6	4.270	0.41	27.29	-	27.70	-	56.00	46.00	-28.30	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

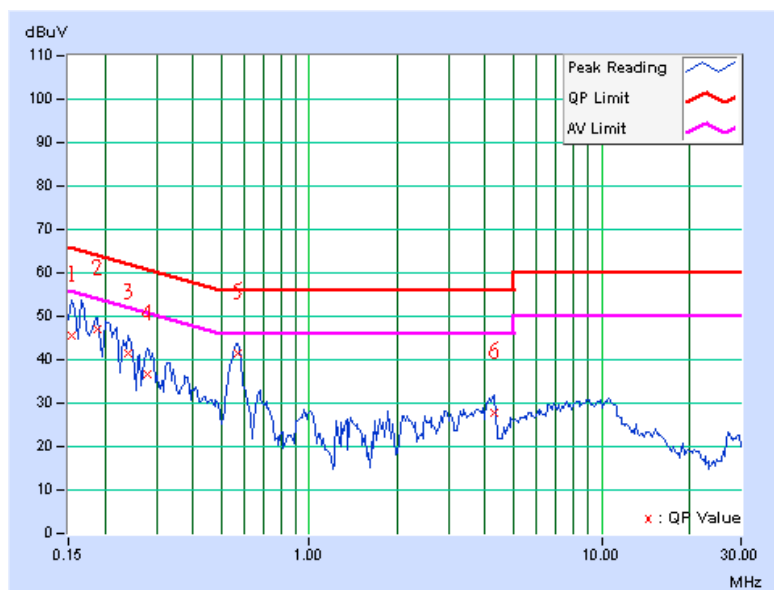




A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 151	PHASE	Line 2
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	15Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH, 1021hPa	TEST MODE	B
TESTED BY	Antony Lee		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.14	45.98	-	46.12	-	66.00	56.00	-19.88	-
2	0.193	0.15	45.04	-	45.19	-	63.91	53.91	-18.72	-
3	0.267	0.15	33.71	-	33.86	-	61.20	51.20	-27.34	-
4	0.326	0.16	32.98	-	33.14	-	59.56	49.56	-26.42	-
5	0.576	0.17	38.61	-	38.78	-	56.00	46.00	-17.22	-
6	4.199	0.43	27.34	-	27.77	-	56.00	46.00	-28.23	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

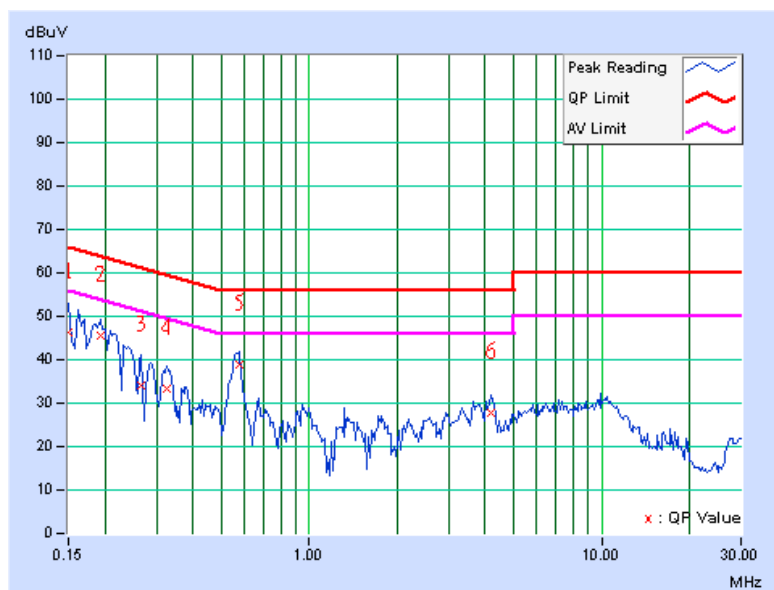



5.3 6dB BANDWIDTH MEASUREMENT

5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

5.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100041	Apr. 22, 2008	Apr. 21, 2009

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


5.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

5.3.4 DEVIATION FROM TEST STANDARD

No deviation

5.3.5 TEST SETUP

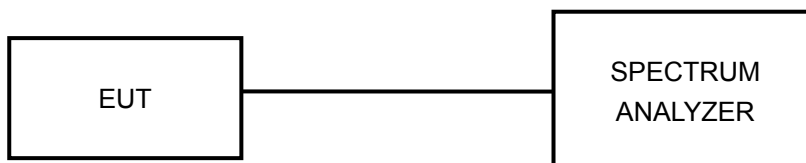

5.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T

5.3.7 TEST RESULTS

802.11a OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	18 deg.C, 63%RH, 1021hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
149	5745	16.43	16.38	0.5	PASS
157	5785	16.40	16.39	0.5	PASS
165	5825	16.42	16.42	0.5	PASS




A D T

FOR CHAIN 0: CH 149

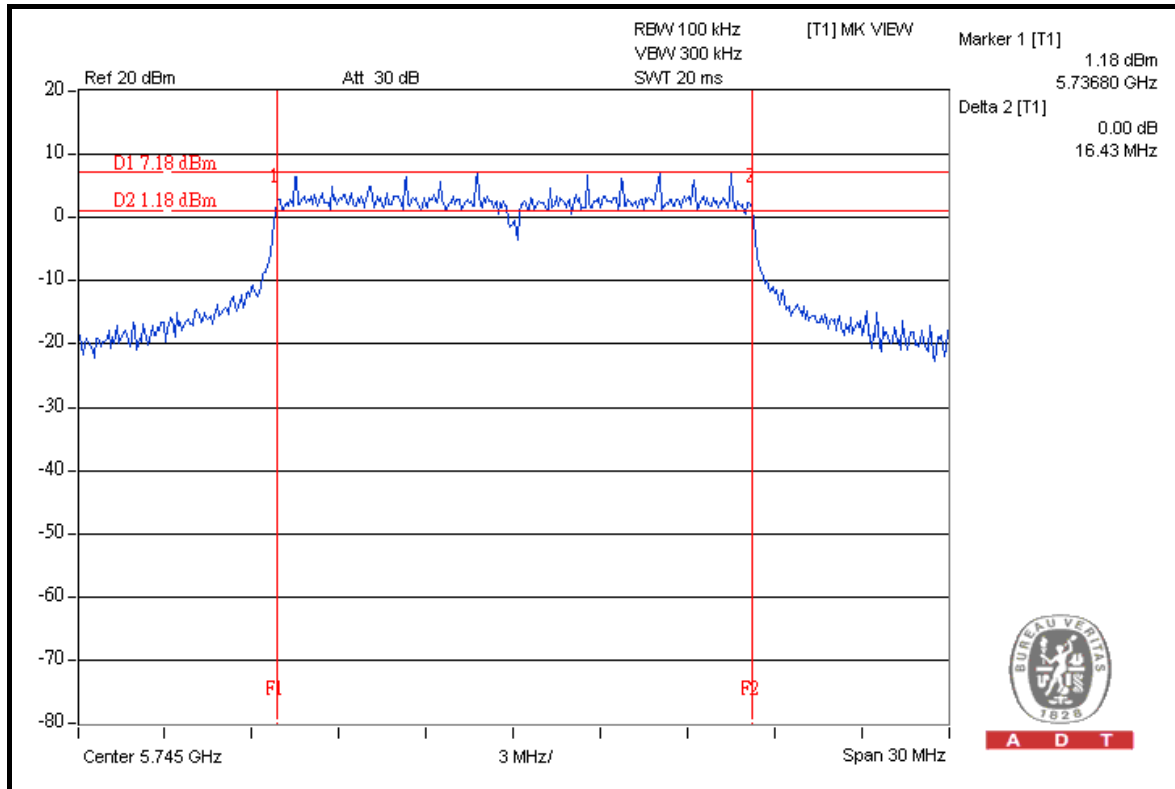


CH 157

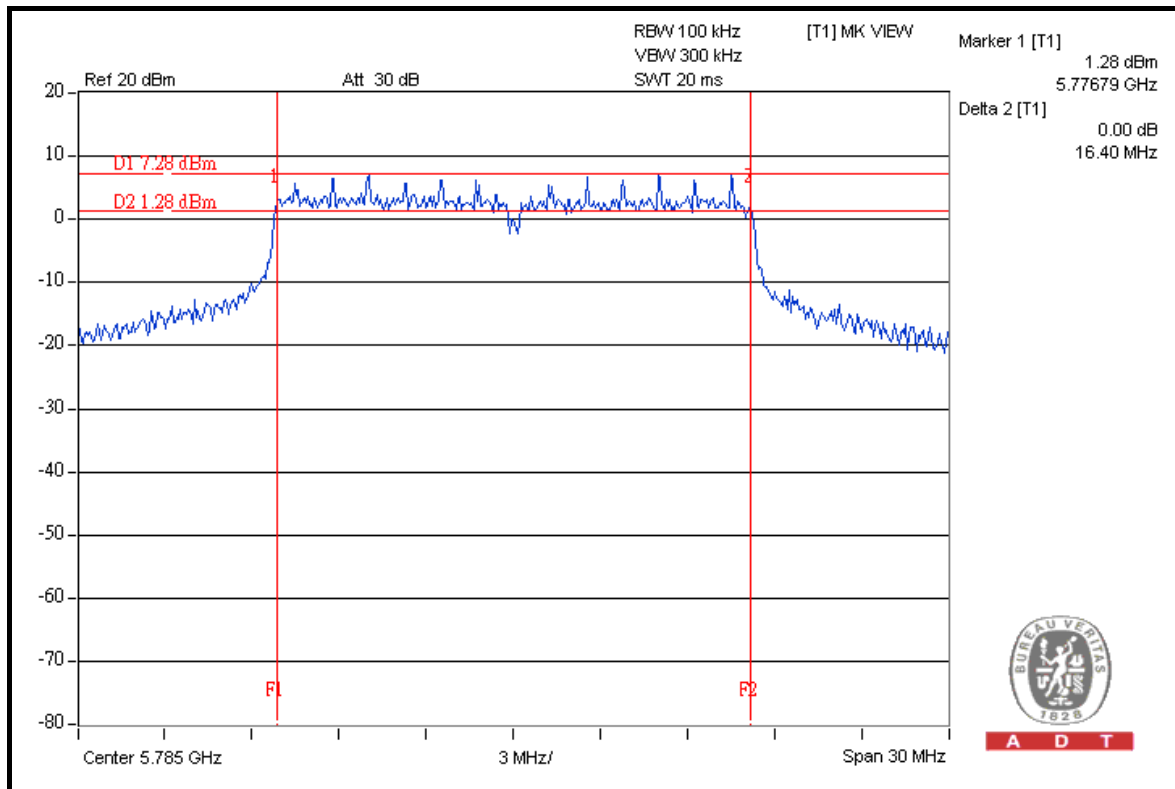




A D T

CH 165

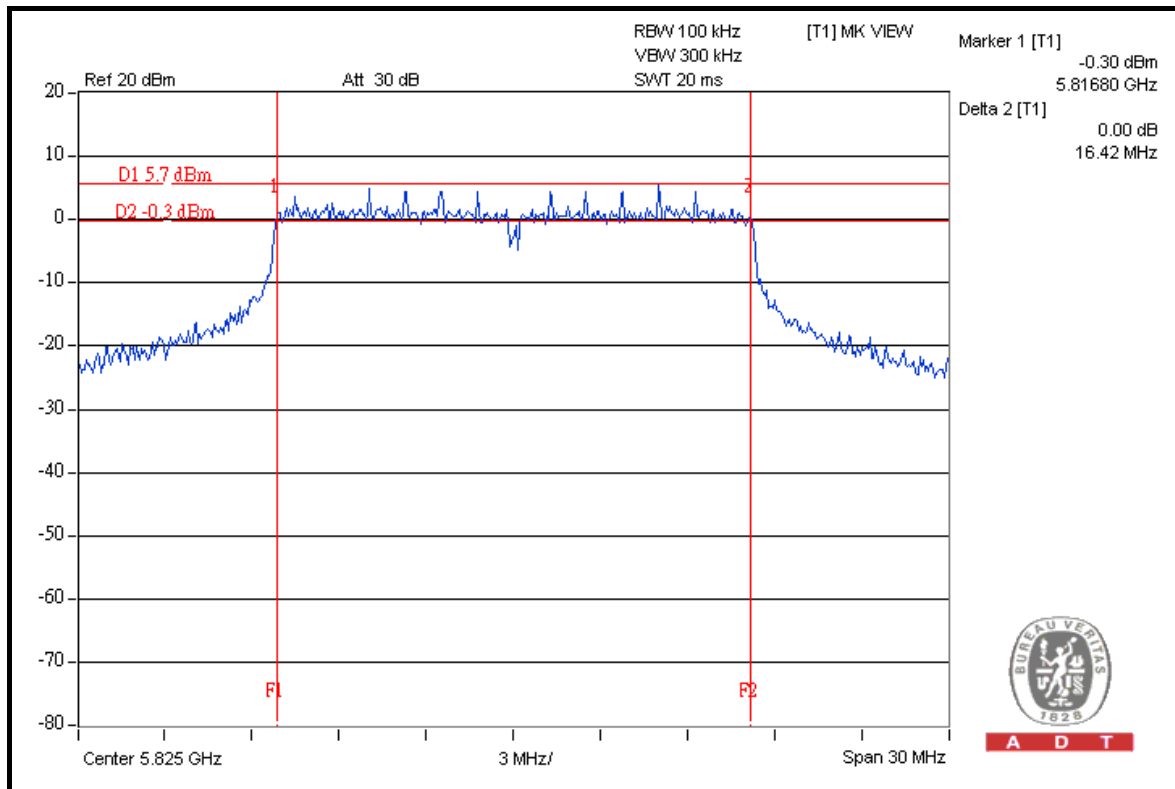


FOR CHAIN 1: CH 149

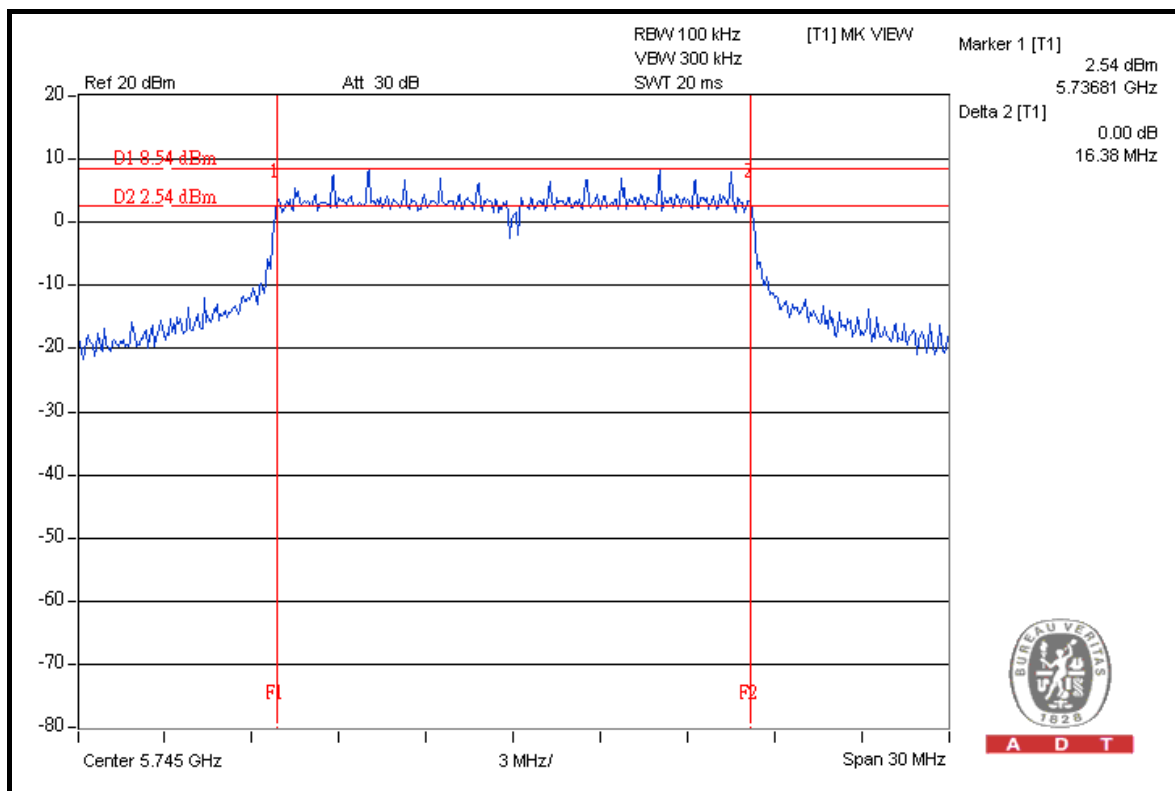




A D T

CH 157

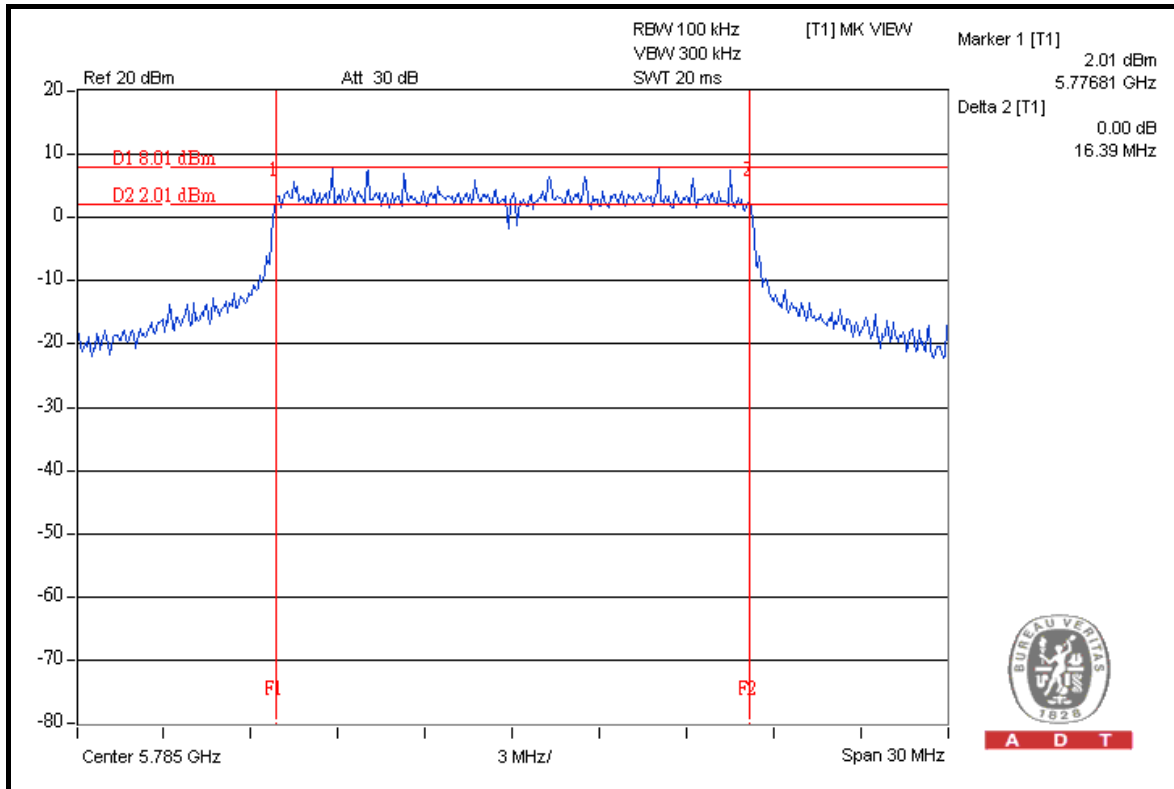

CH 165

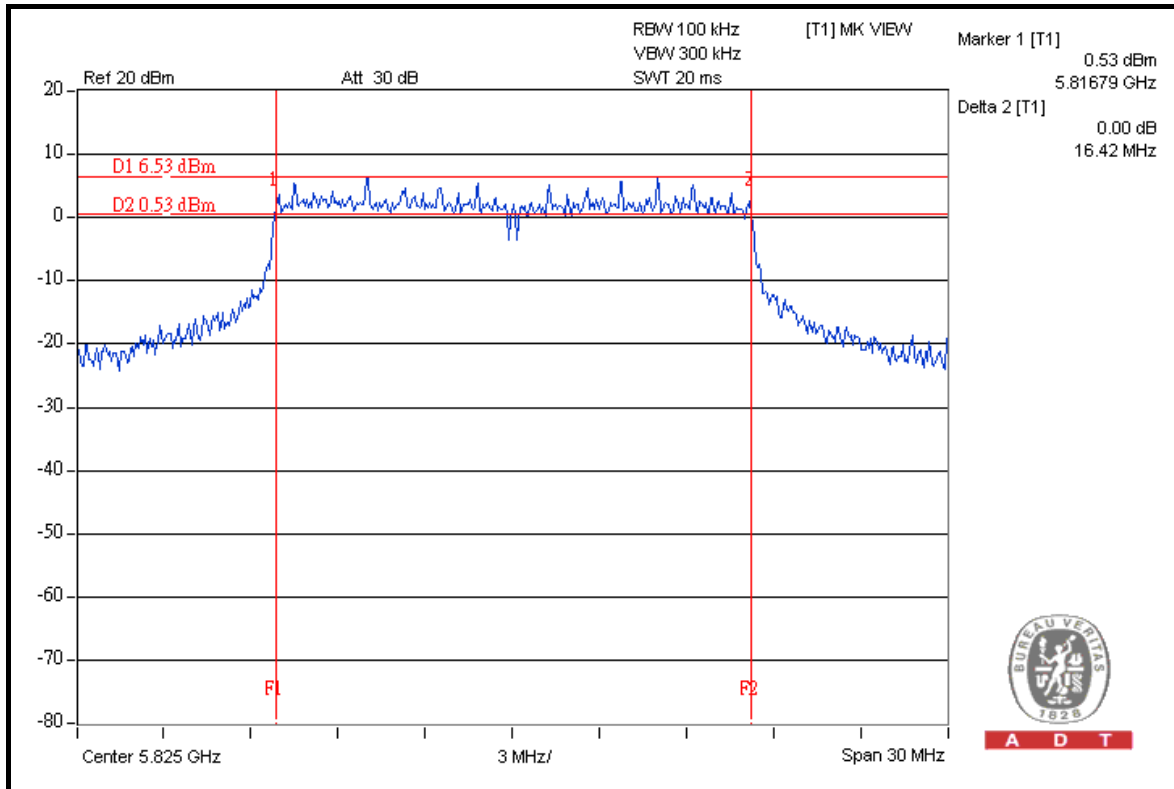



A D T

DRAFT 802.11n (20MHz) OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	7.2Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	18 deg.C, 63%RH, 1021hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
149	5745	17.68	17.68	0.5	PASS
157	5785	17.67	17.61	0.5	PASS
165	5825	17.60	17.66	0.5	PASS




A D T

FOR CHAIN 0: CH 149

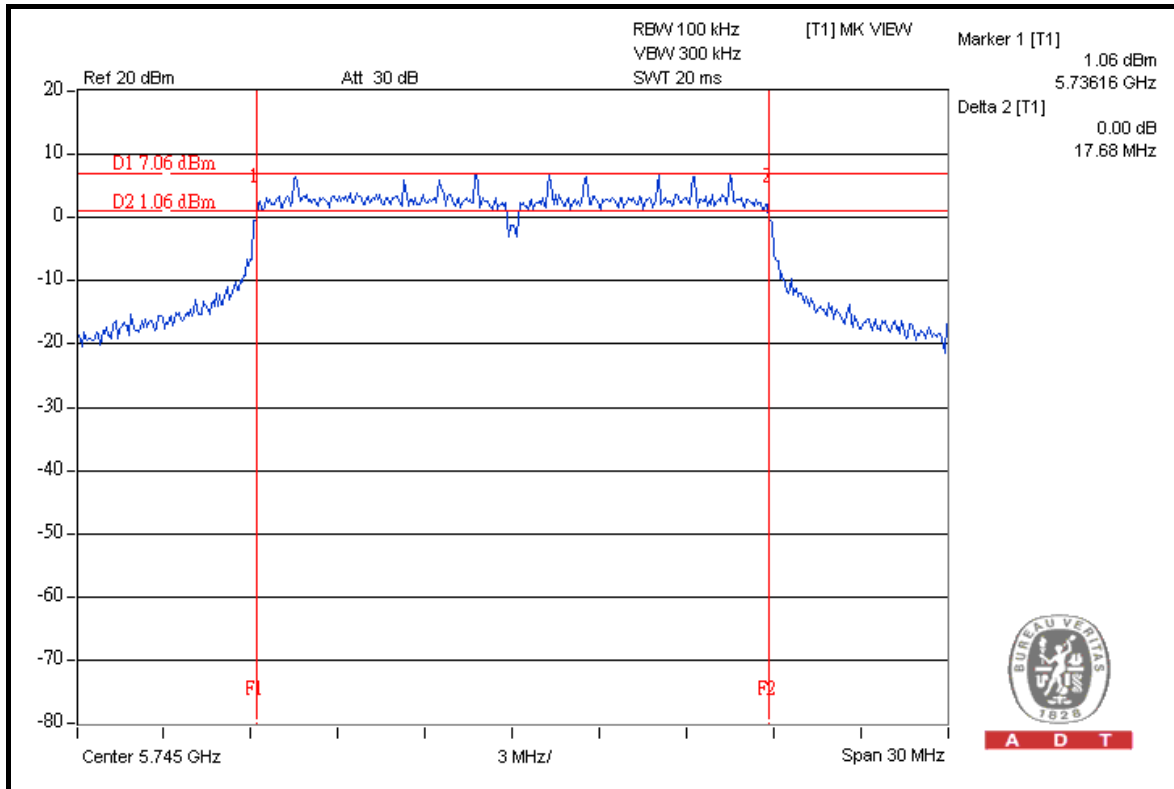

A D T

CH 157

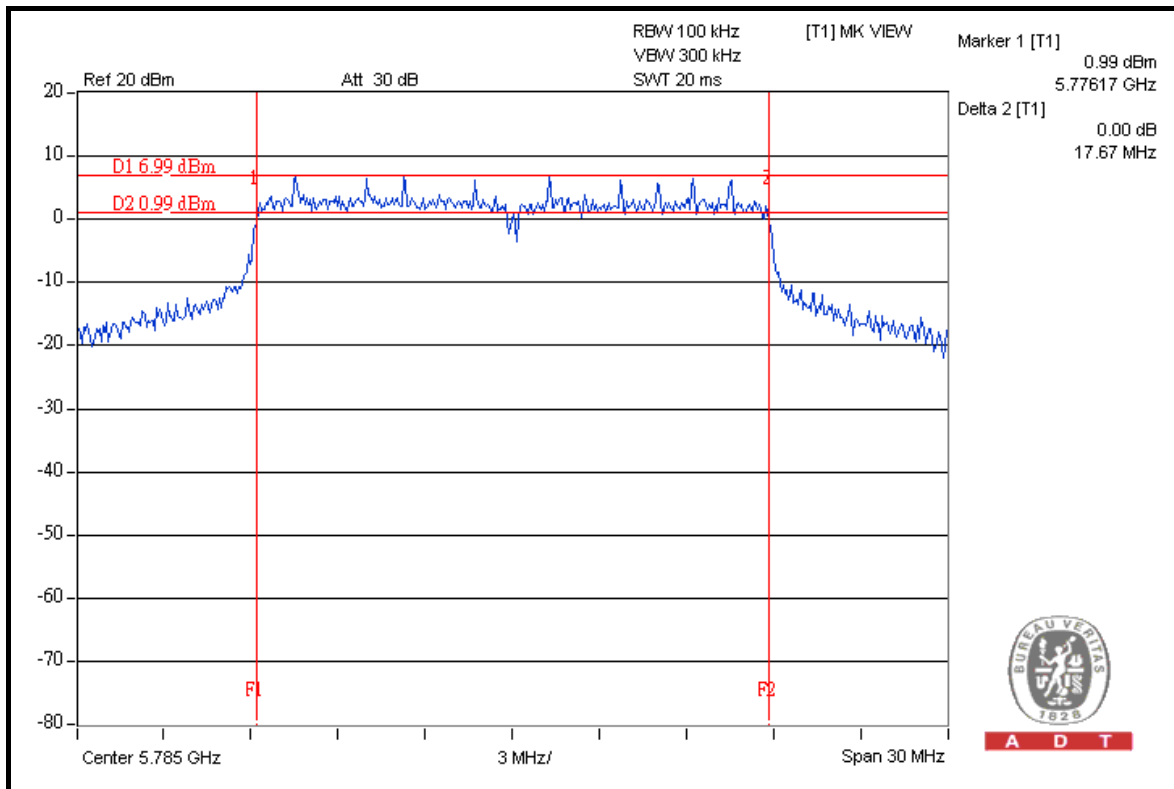


A D T




A D T

CH 165

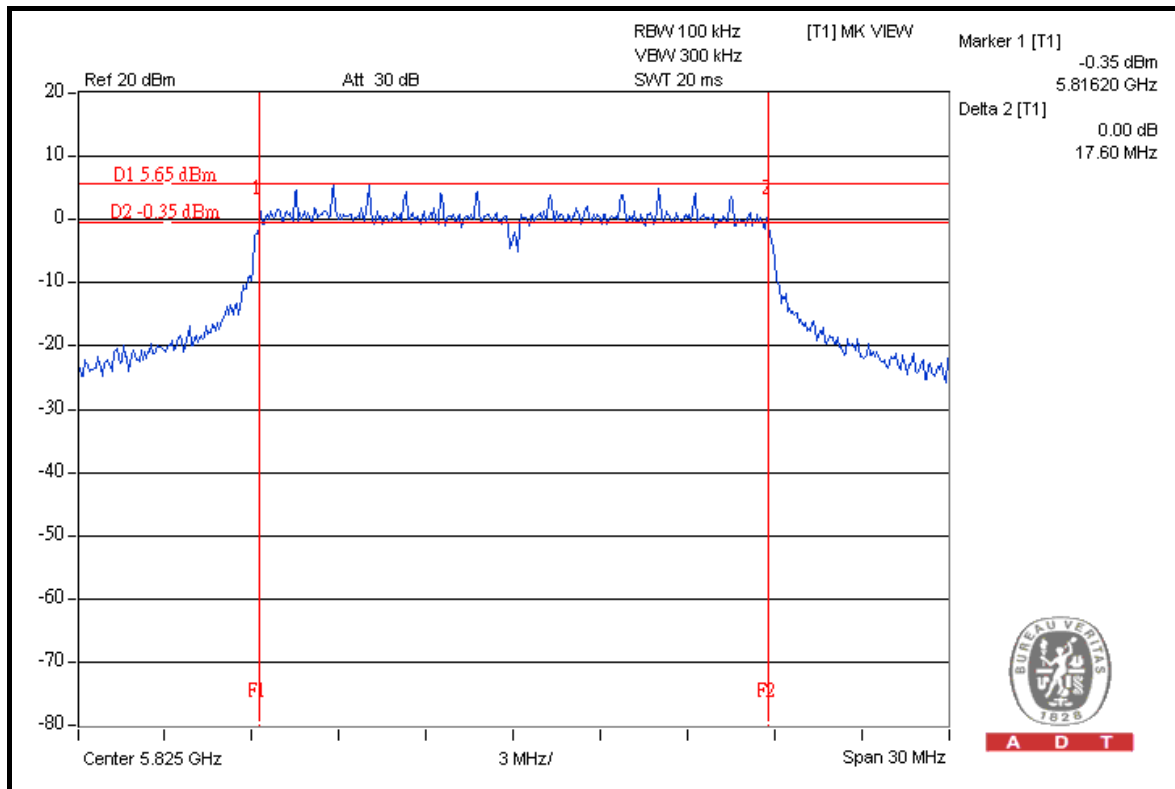


FOR CHAIN 1: CH 149

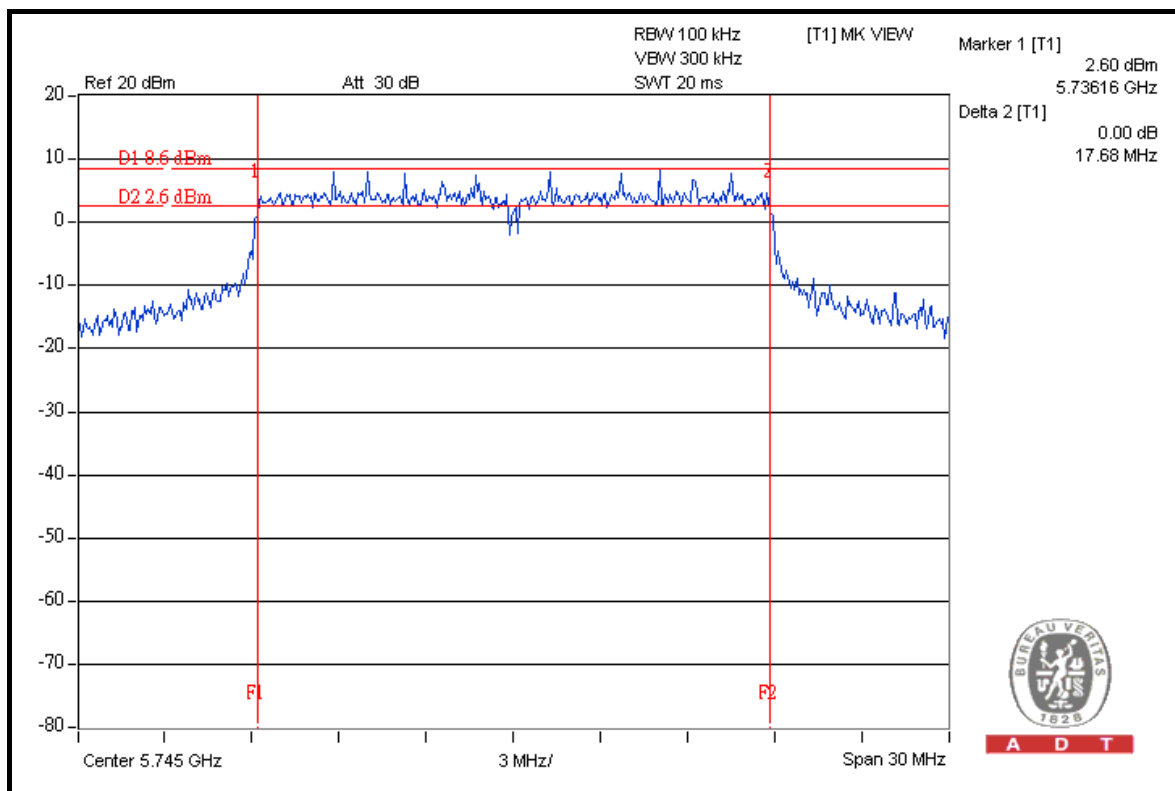




A D T

CH 157

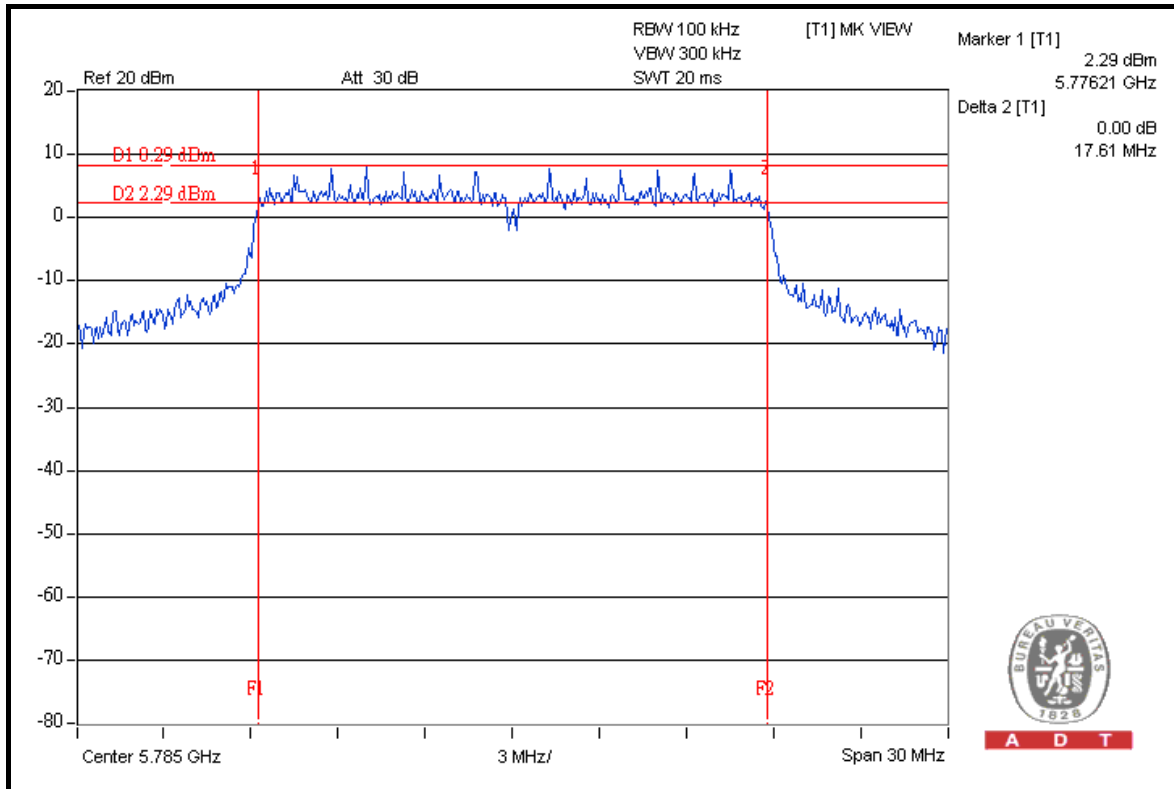

A D T

CH 165

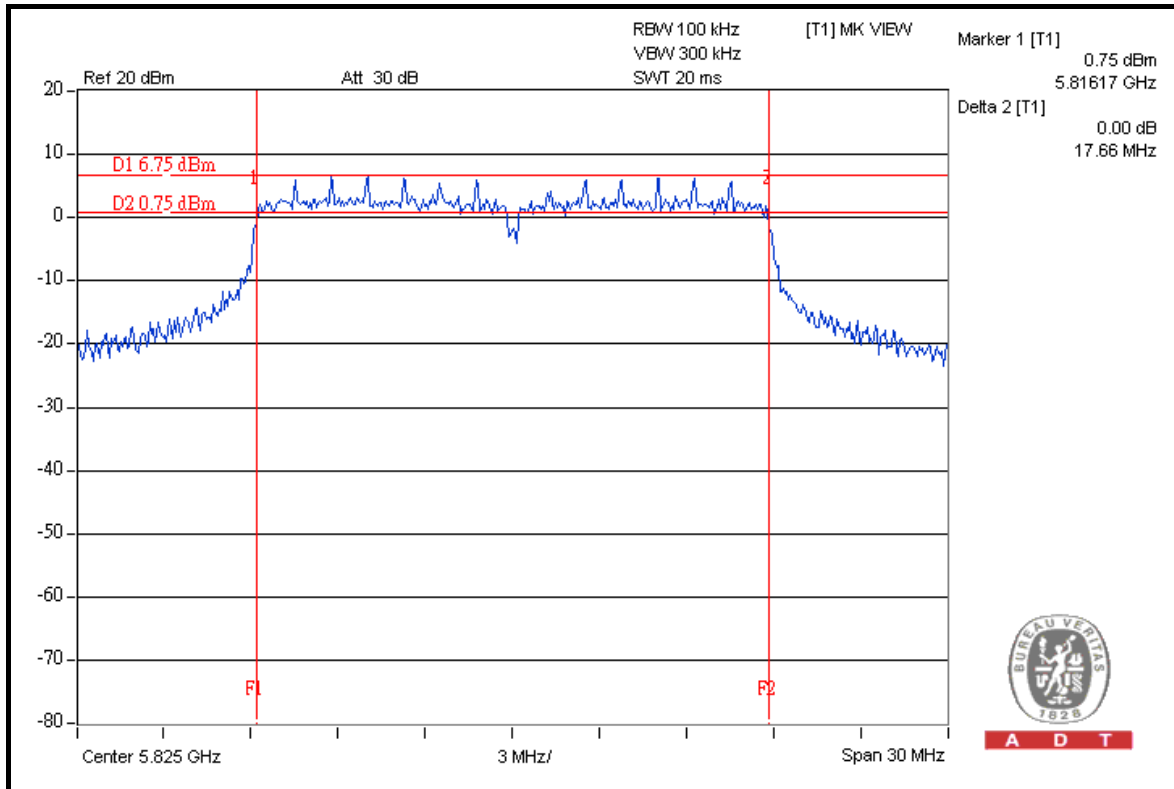

A D T



A D T

DRAFT 802.11n (40MHz) OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	15.0Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	18 deg.C, 63%RH, 1021hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
151	5755	36.38	36.46	0.5	PASS
159	5795	36.45	36.48	0.5	PASS




A D T

FOR CHAIN 0: CH 151

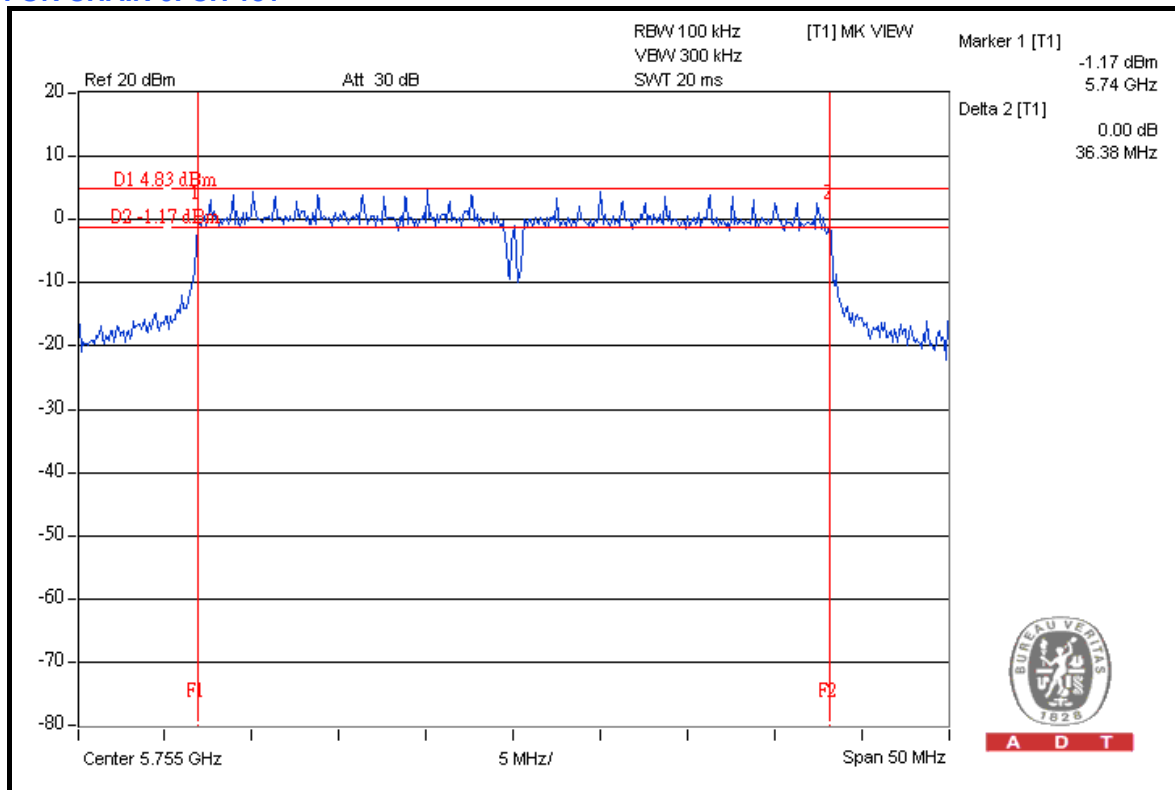


CH 159

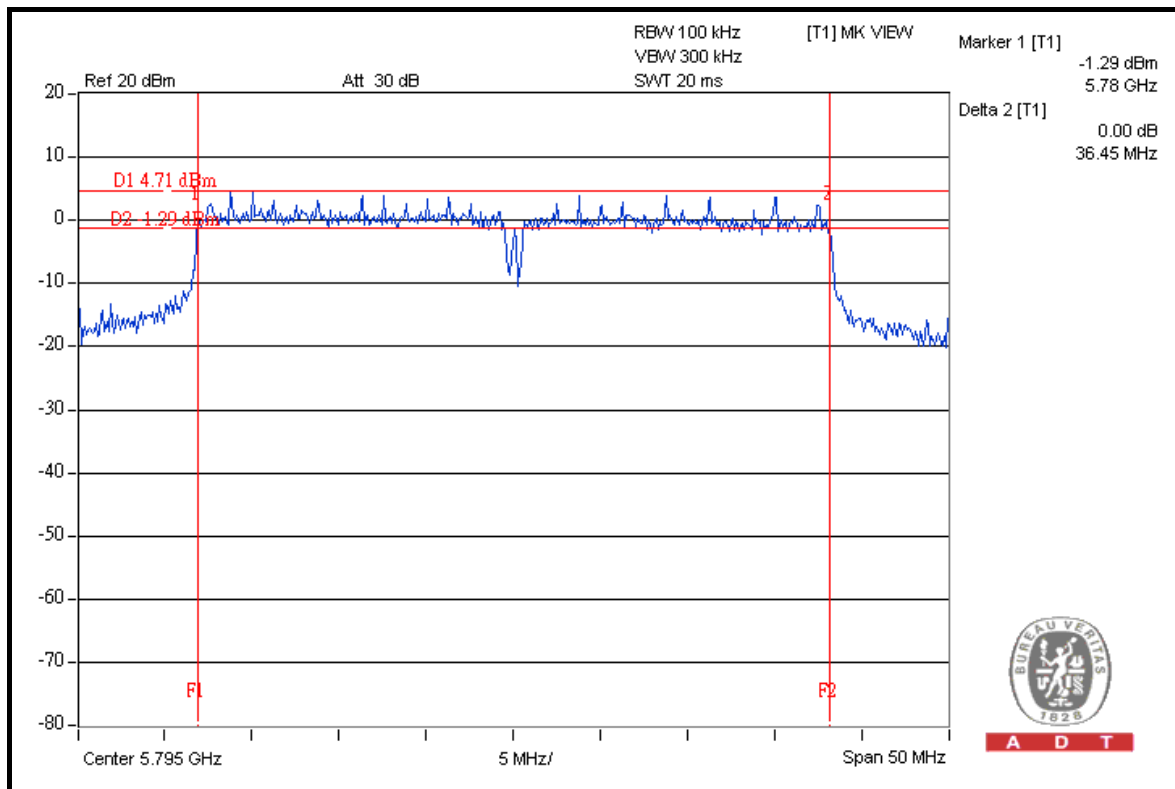




A D T

FOR CHAIN 1: CH 151

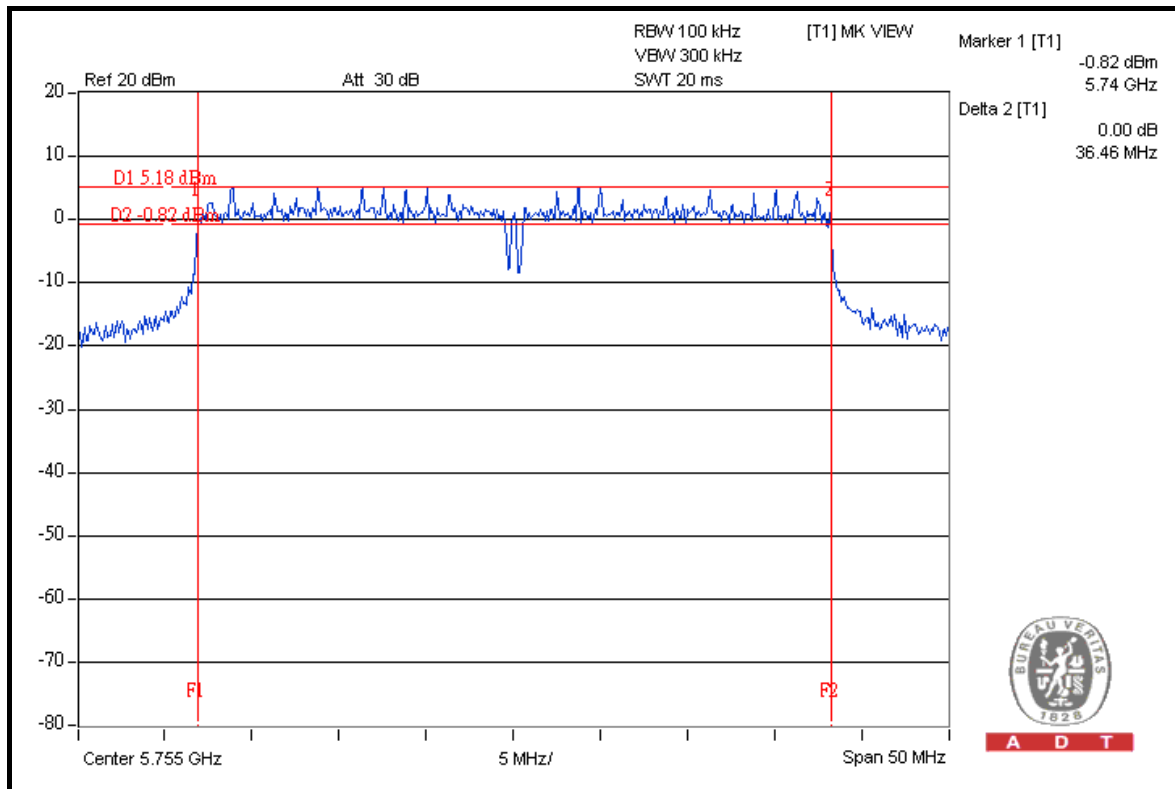

A D T

CH 159

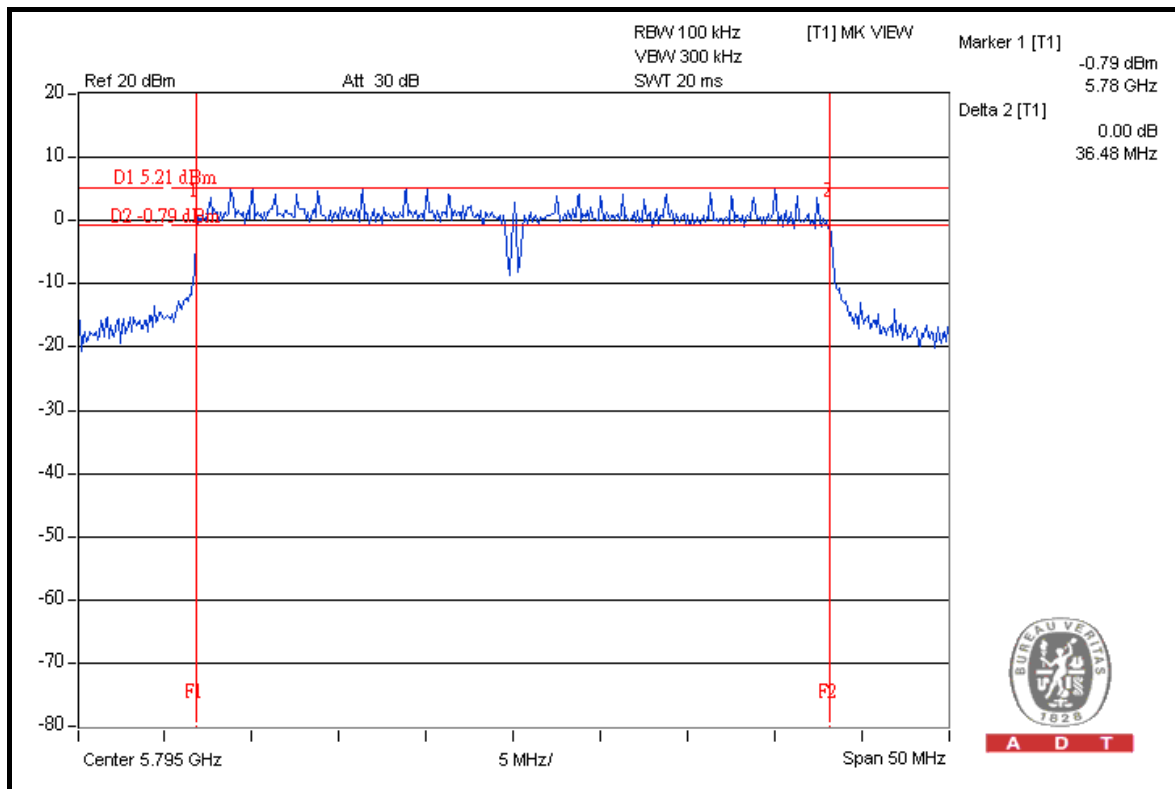

A D T



A D T

5.4 MAXIMUM PEAK OUTPUT POWER

5.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

5.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
High Speed Peak Power Meter	ML2495A	0824012	Aug. 04, 2008	Aug. 03, 2009
Power Sensor	MA2444B	0738138	Aug. 04, 2008	Aug. 03, 2009

- Note:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Measurement Bandwidth of ML2495A is 65MHz greater than 6dB bandwidth of emission.


5.4.3 TEST PROCEDURES

A power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

5.4.4 DEVIATION FROM TEST STANDARD

No deviation.

5.4.5 TEST SETUP

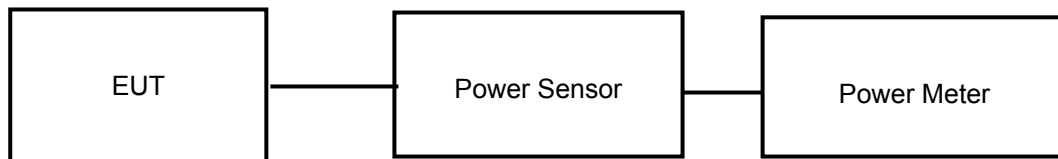

5.4.6 EUT OPERATING CONDITIONS

Same as Item 5.3.6



5.4.7 TEST RESULTS

802.11a OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	18 deg.C, 63%RH, 1021hPa
TESTED BY	Match Tsui		

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
149	5745	23.54	25.07	547.310	27.38	30	PASS
157	5785	23.59	24.62	518.294	27.15	30	PASS
165	5825	22.06	23.04	362.067	25.59	30	PASS

DRAFT 802.11n (20MHz) OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	7.2Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	18 deg.C, 63%RH, 1021hPa
TESTED BY	Match Tsui		

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
149	5745	23.57	25.06	548.137	27.39	30	PASS
157	5785	23.53	24.52	508.563	27.06	30	PASS
165	5825	22.09	23.08	365.044	25.62	30	PASS



A D T

DRAFT 802.11n (40MHz) OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	15.0Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	18 deg.C, 63%RH, 1021hPa
TESTED BY	Match Tsui		

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
151	5755	24.08	25.08	577.965	27.62	30	PASS
159	5795	24.03	25.05	572.819	27.58	30	PASS



5.5 POWER SPECTRAL DENSITY MEASUREMENT

5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

5.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100041	Apr. 22, 2008	Apr. 21, 2009

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.




A D T

5.5.4 DEVIATION FROM TEST STANDARD

No deviation.

5.5.5 TEST SETUP

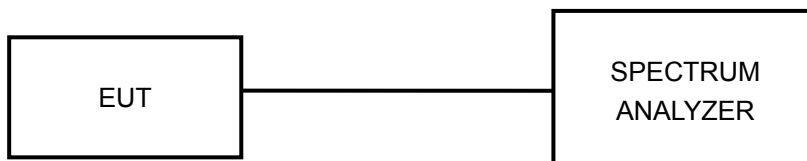

5.5.6 EUT OPERATING CONDITION

Same as Item 5.3.6.



A D T

5.5.7 TEST RESULTS

802.11a OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	18 deg.C, 63%RH, 1021hPa
TESTED BY	Match Tsui		

CHAN.	CHAN. FREQ. (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
149	5745	-6.25	-2.64	0.782	-1.07	8	PASS
157	5785	-6.19	-3.03	0.738	-1.32	8	PASS
165	5825	-7.63	-4.51	0.527	-2.79	8	PASS




A D T

FOR CHAIN 0: CH 149

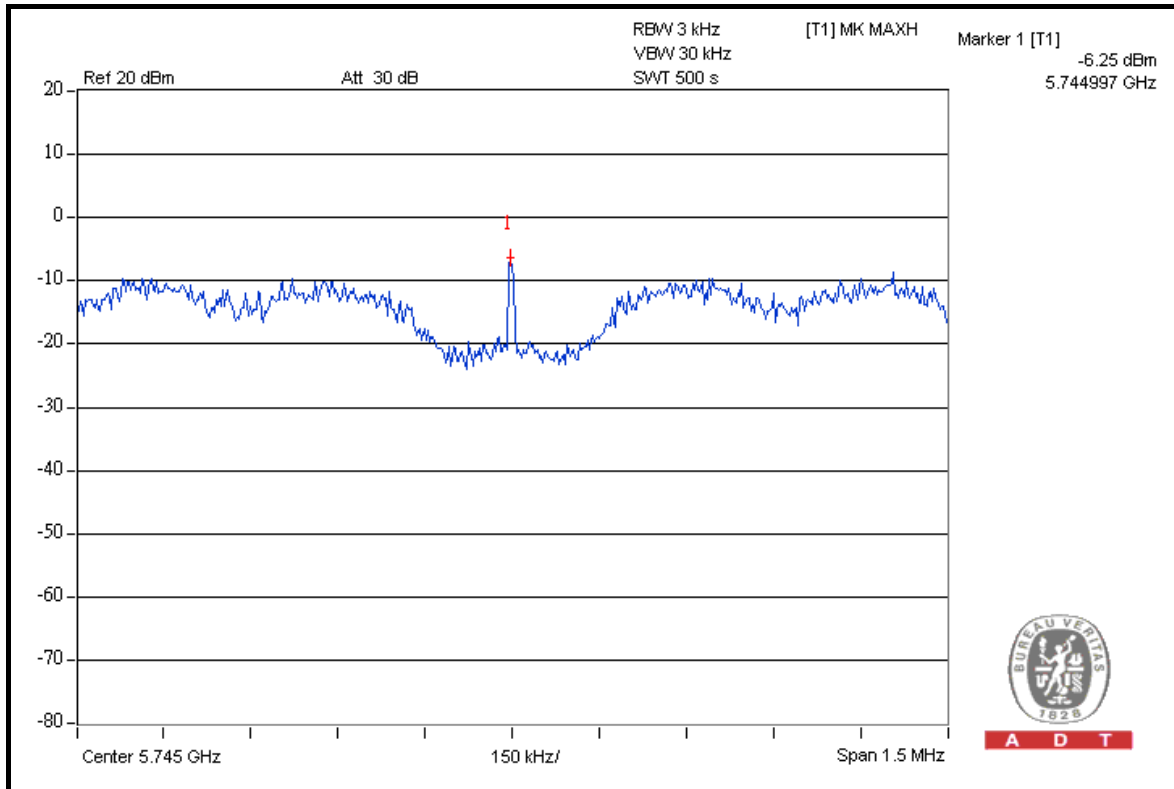


CH 157

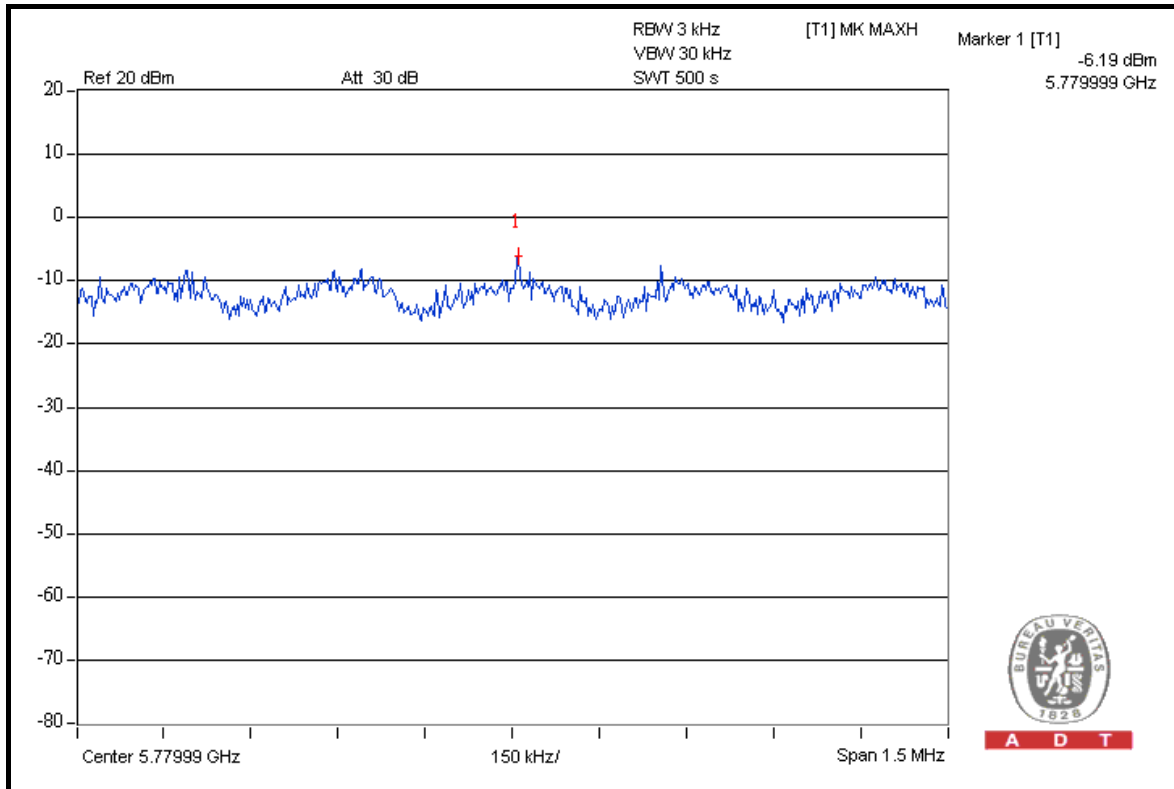




A D T

CH 165

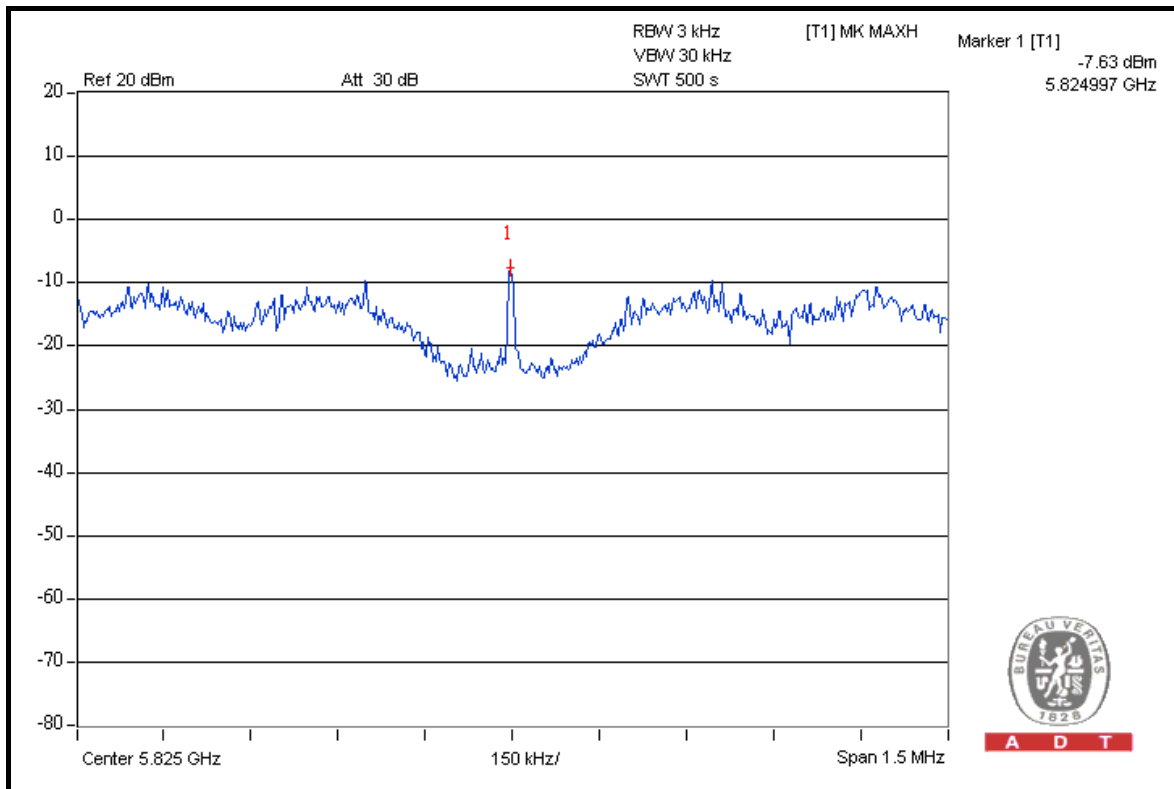


FOR CHAIN 1: CH 149

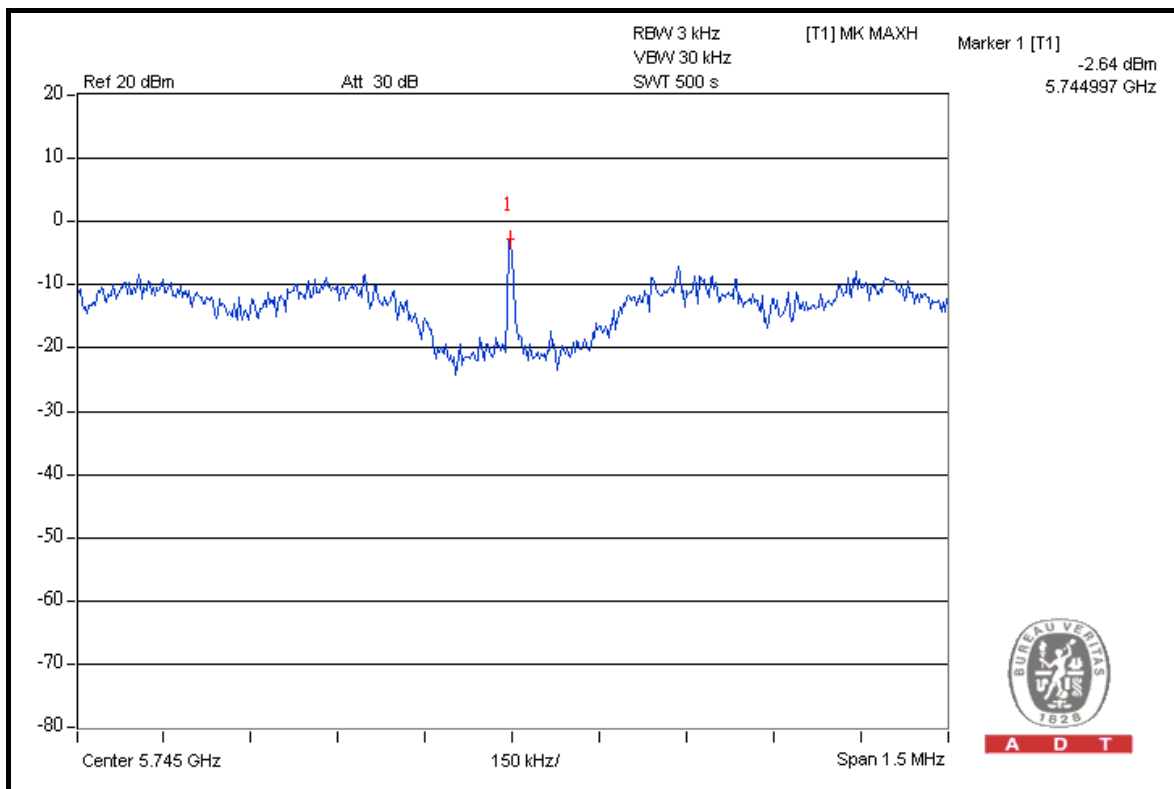




A D T

CH 157

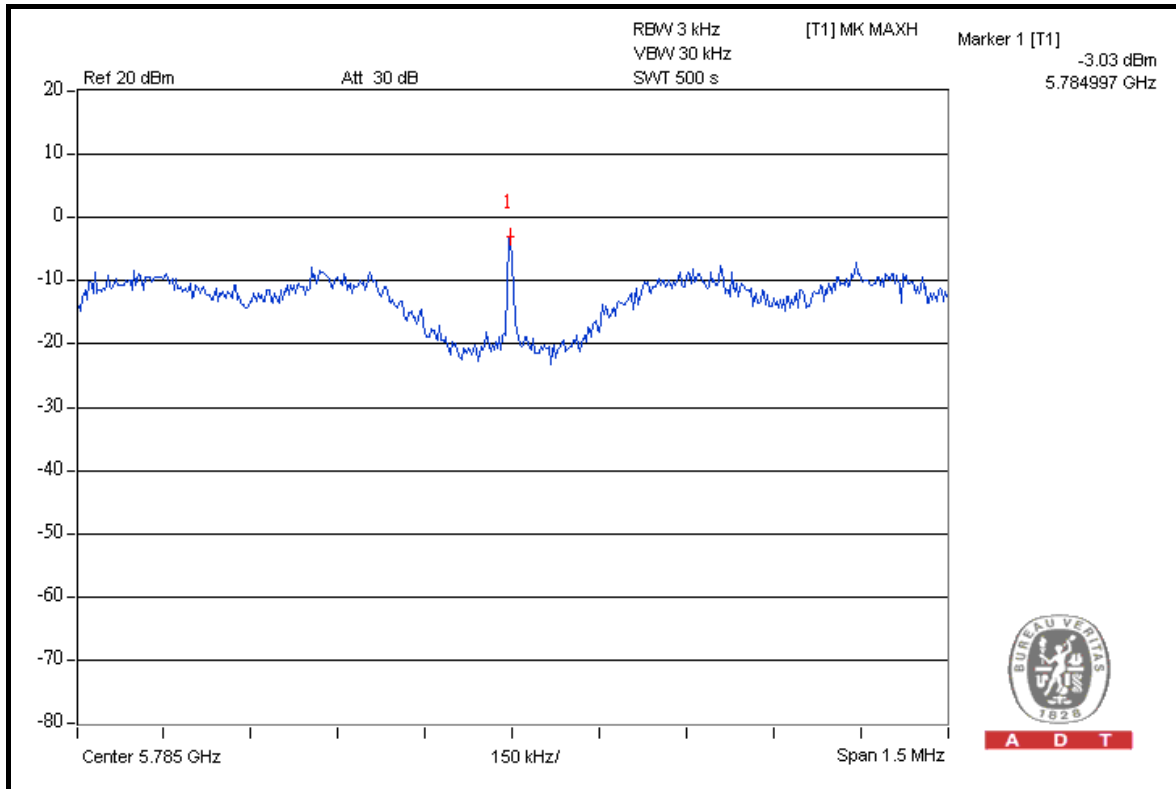

A D T

CH 165

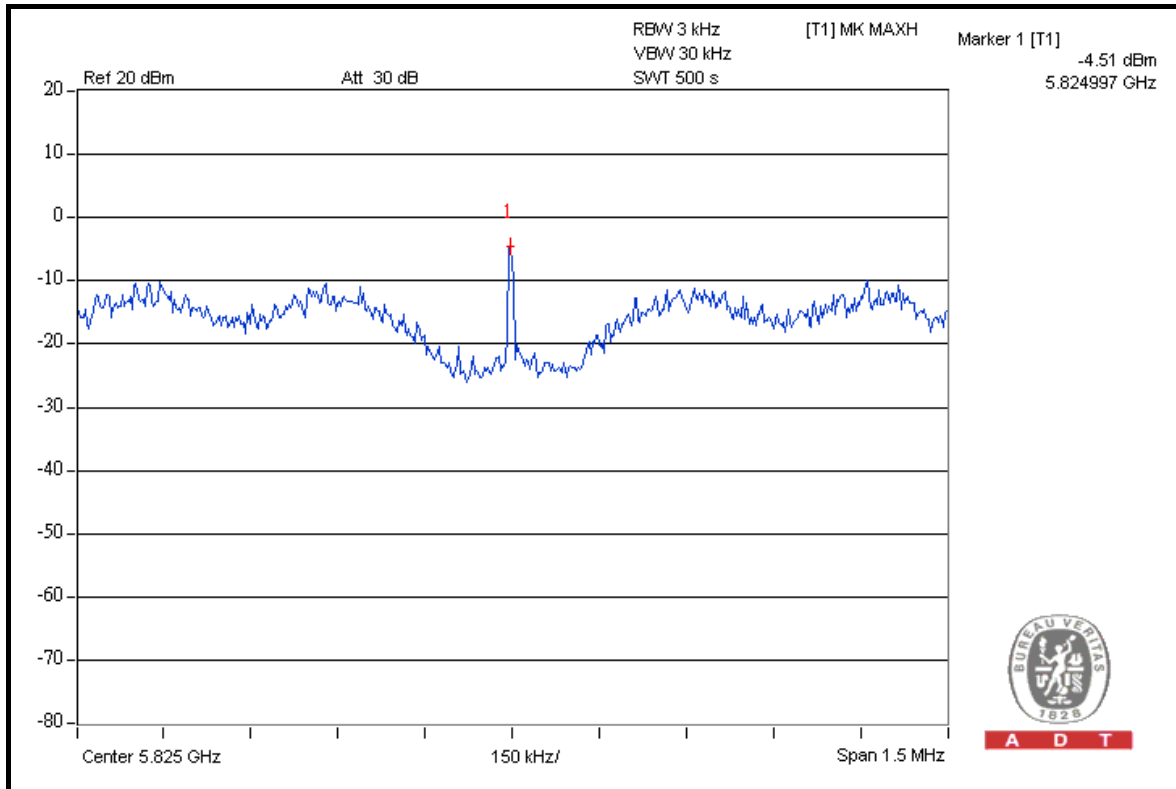

A D T



A D T

DRAFT 802.11n (20MHz) OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	7.2Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	18 deg.C, 63%RH, 1021hPa
TESTED BY	Match Tsui		

CHAN.	CHAN. FREQ. (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
149	5745	-6.40	-3.05	0.725	-1.40	8	PASS
157	5785	-6.27	-3.36	0.697	-1.57	8	PASS
165	5825	-7.90	-4.90	0.486	-3.14	8	PASS




A D T

FOR CHAIN 0: CH 149

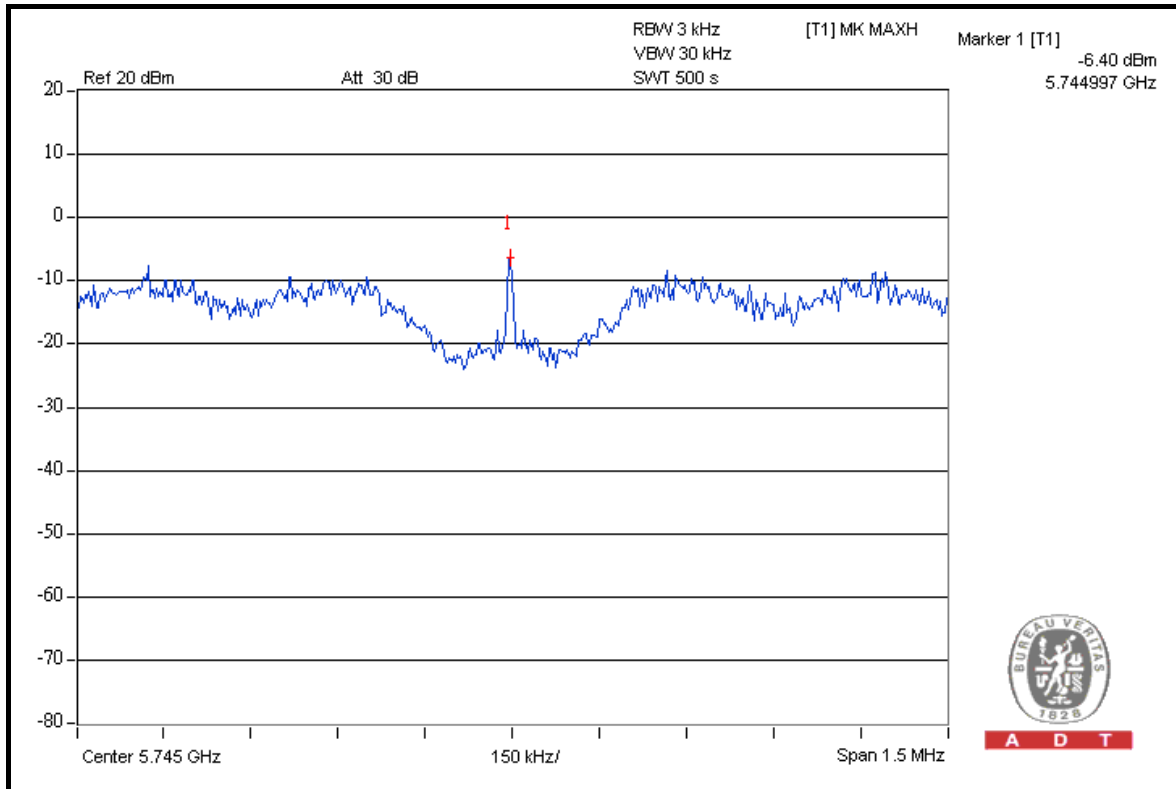


CH 157

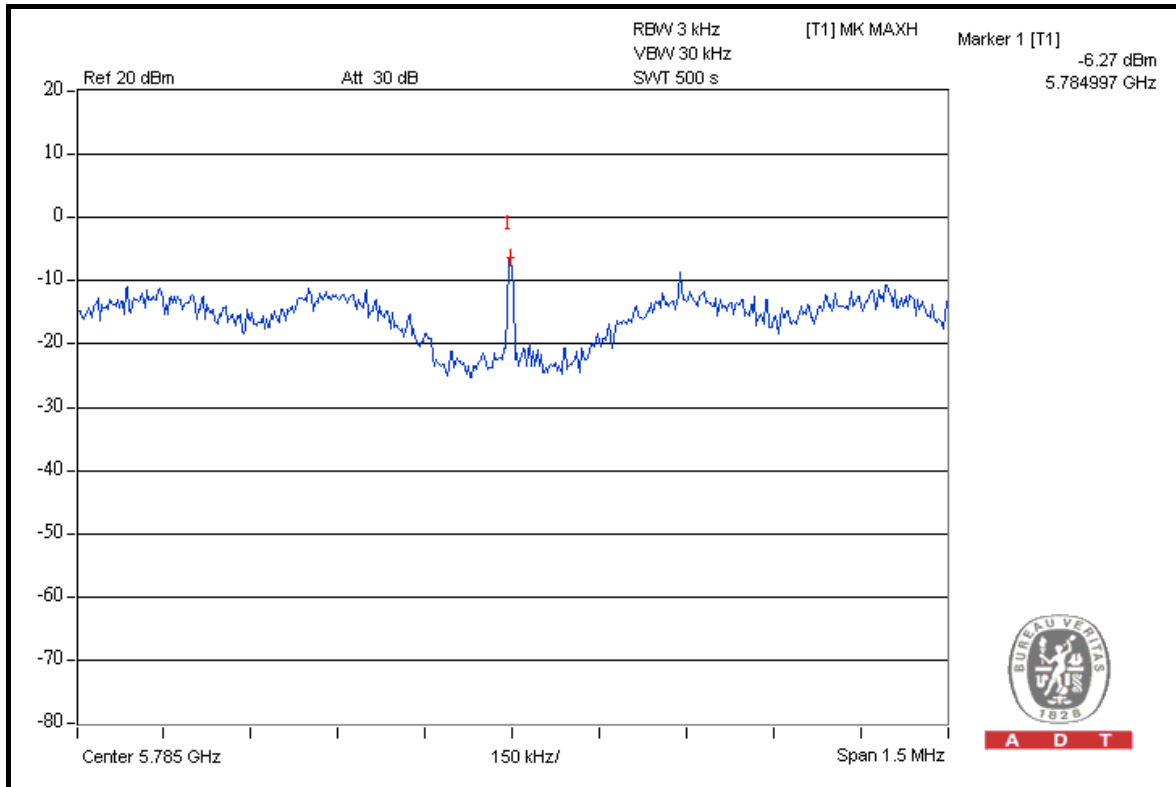




A D T

CH 165

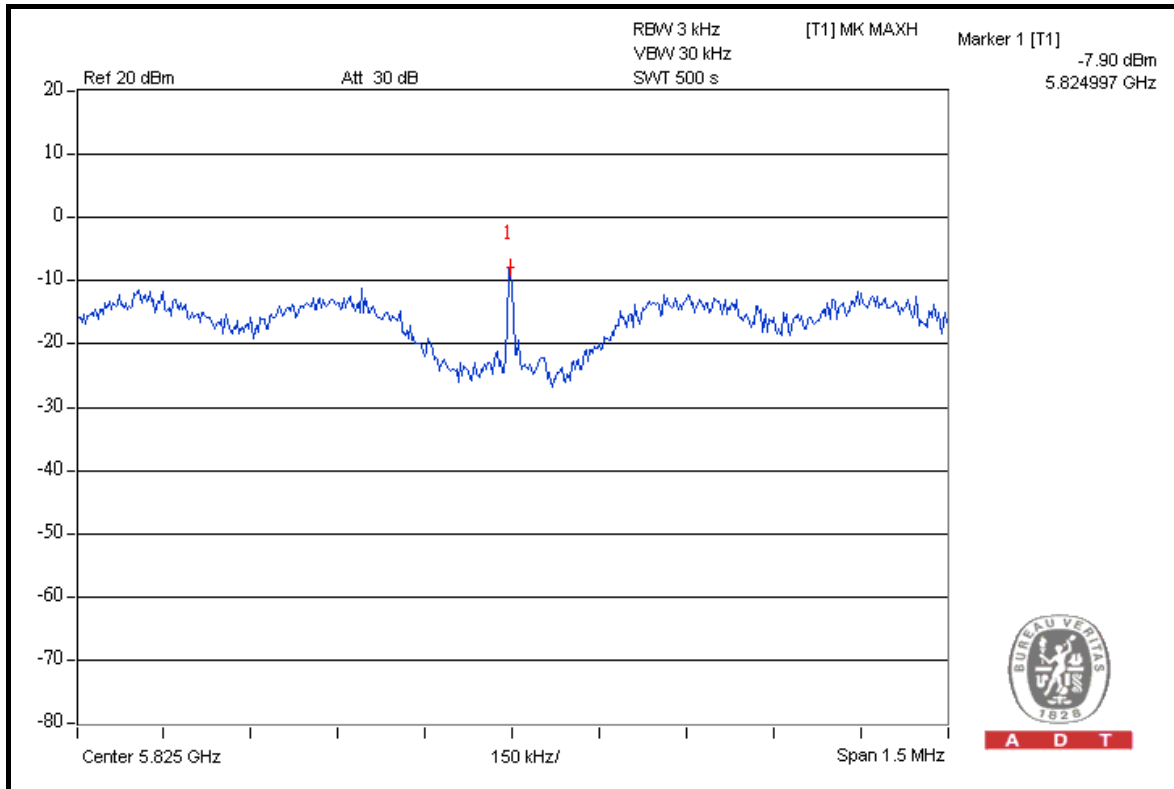


FOR CHAIN 1: CH 149

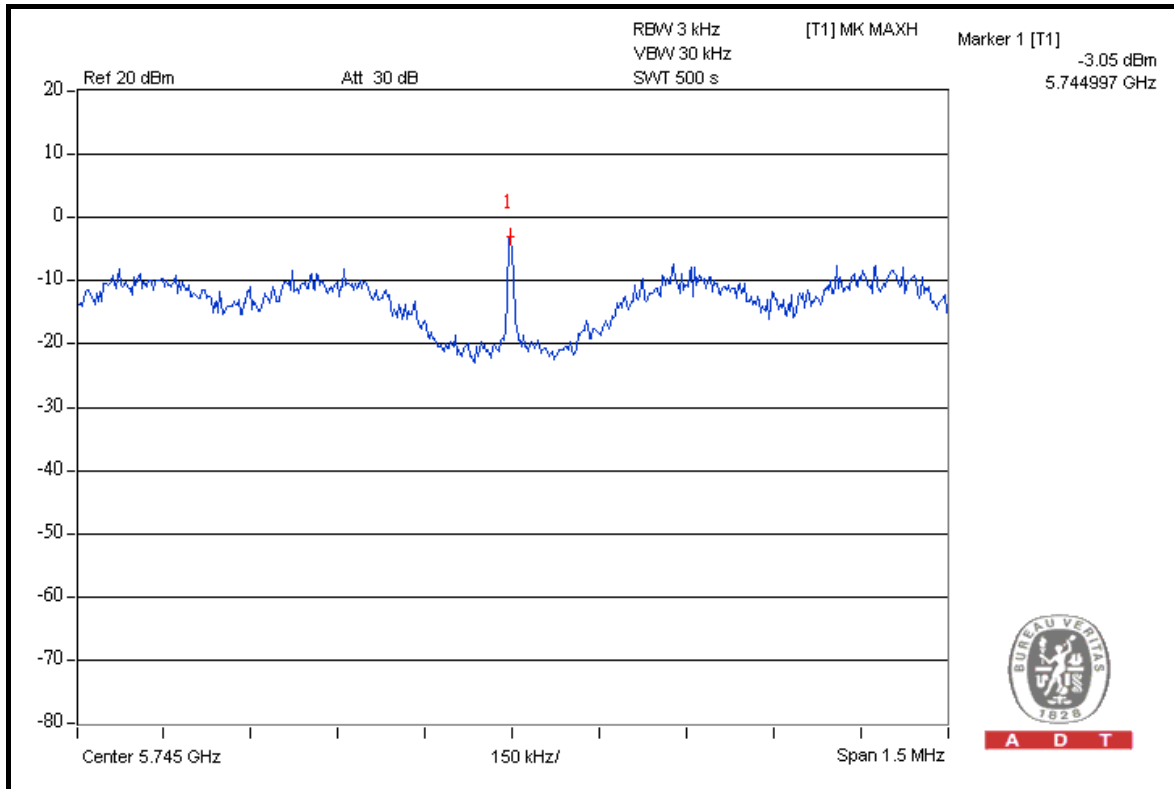




A D T

CH 157

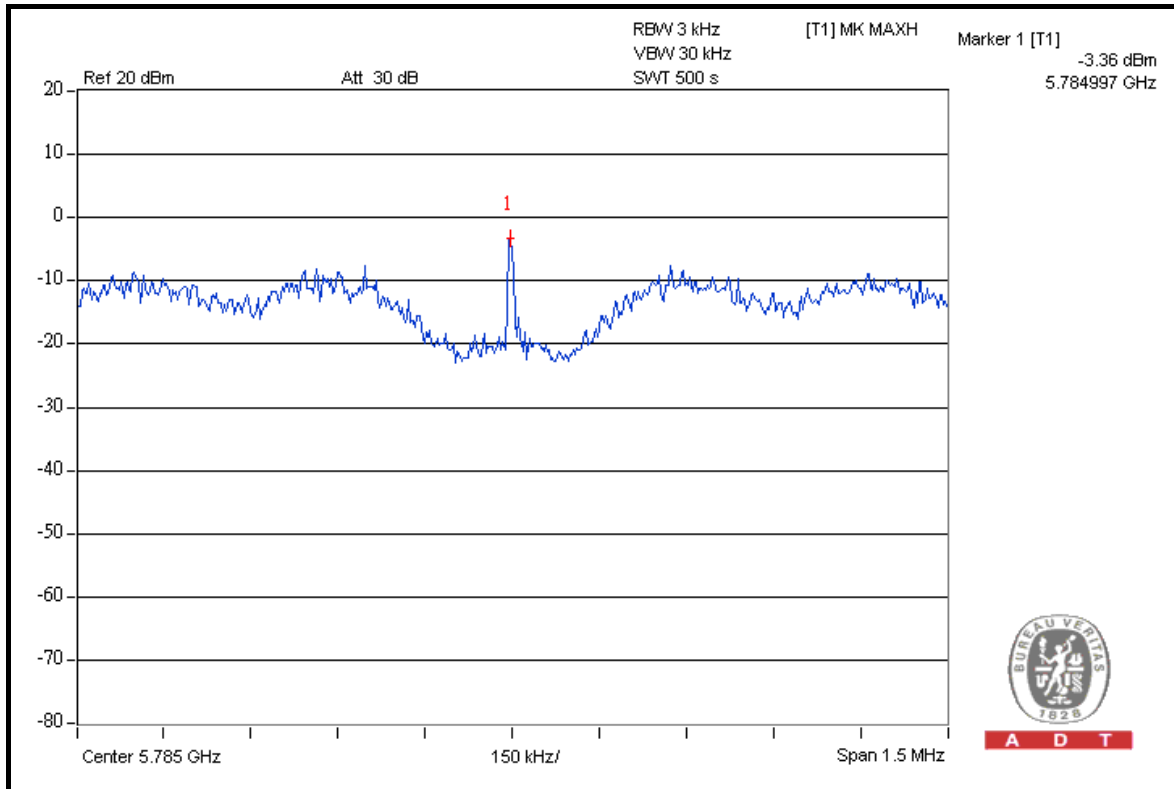

CH 165

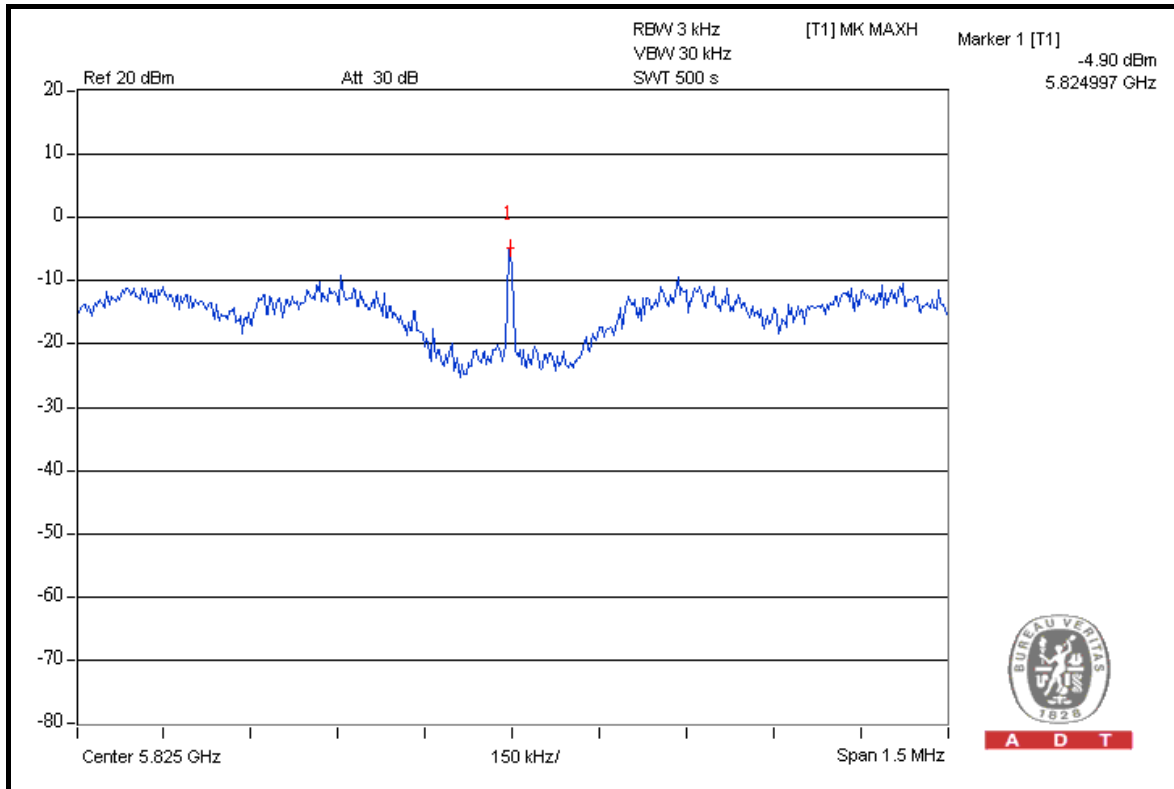



A D T

DRAFT 802.11n (40MHz) OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	15.0Mbps
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	18 deg.C, 63%RH, 1021hPa
TESTED BY	Match Tsui		

CHAN.	CHAN. FREQ. (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
151	5755	-3.89	-0.26	1.350	1.30	8	PASS
159	5795	-4.00	-0.19	1.355	1.32	8	PASS




A D T

FOR CHAIN 0: CH 151

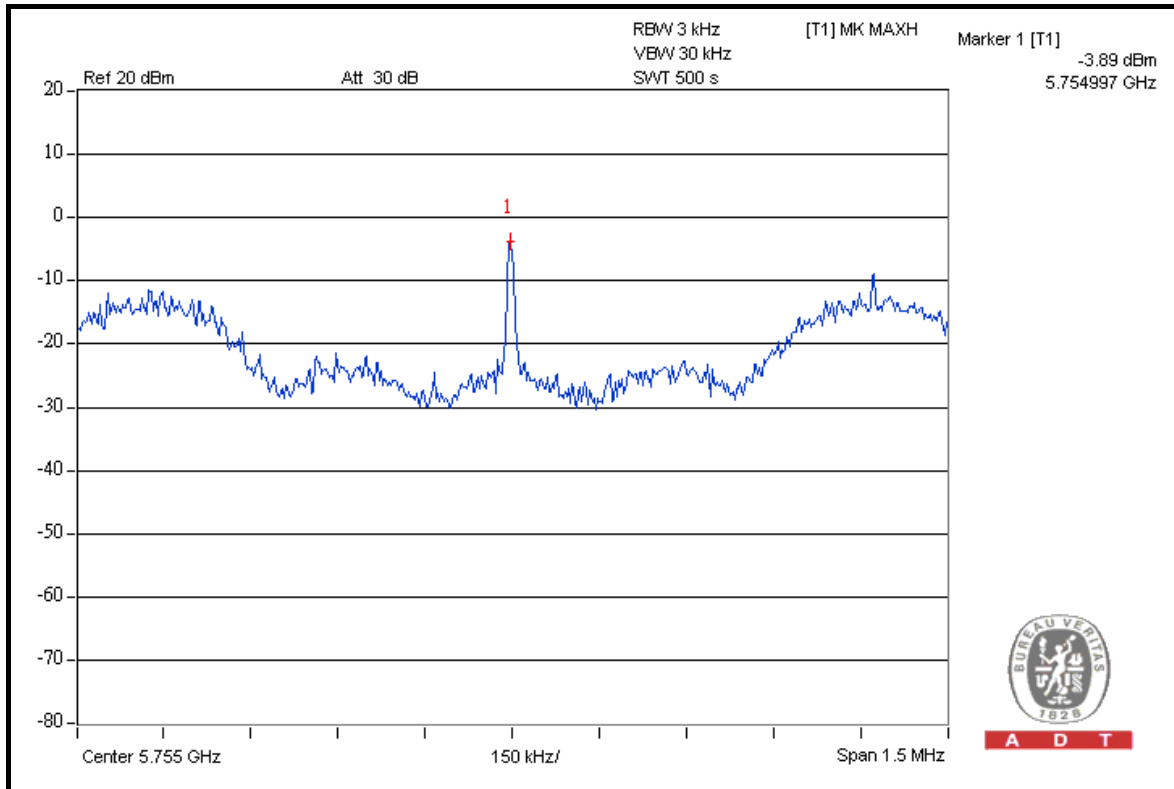


CH 159

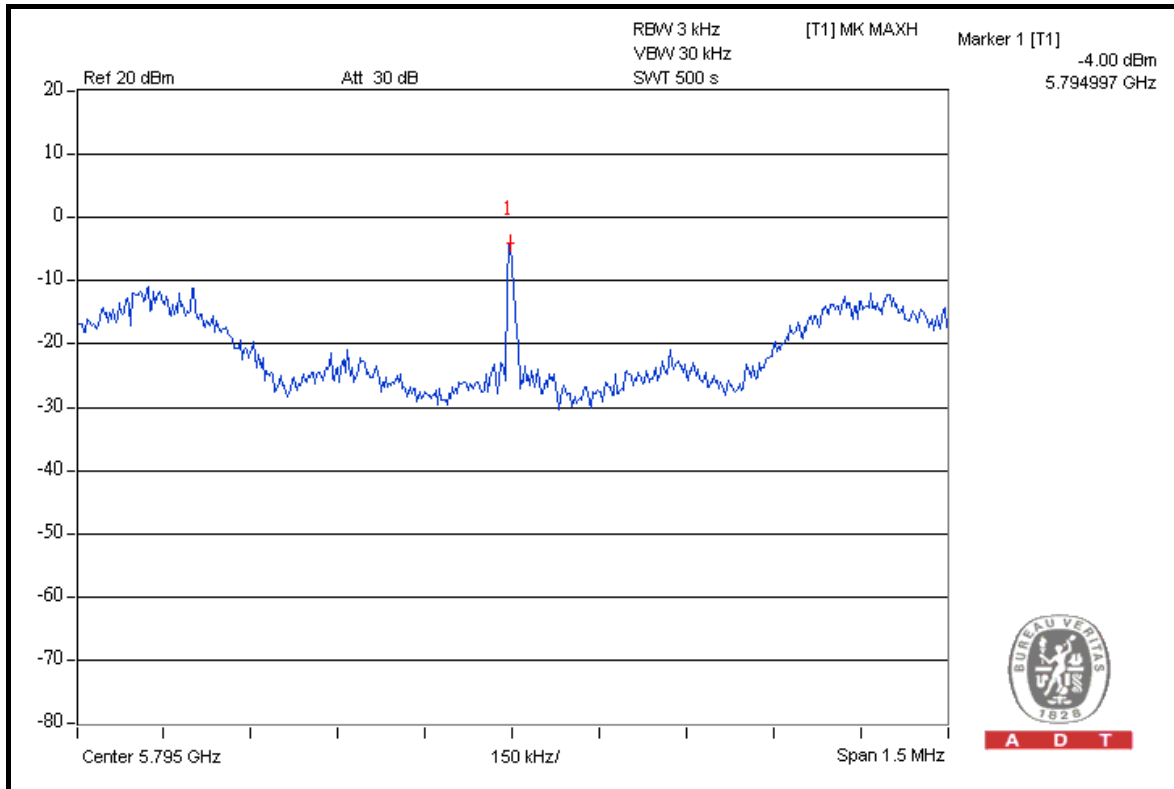




A D T

FOR CHAIN 1: CH 151

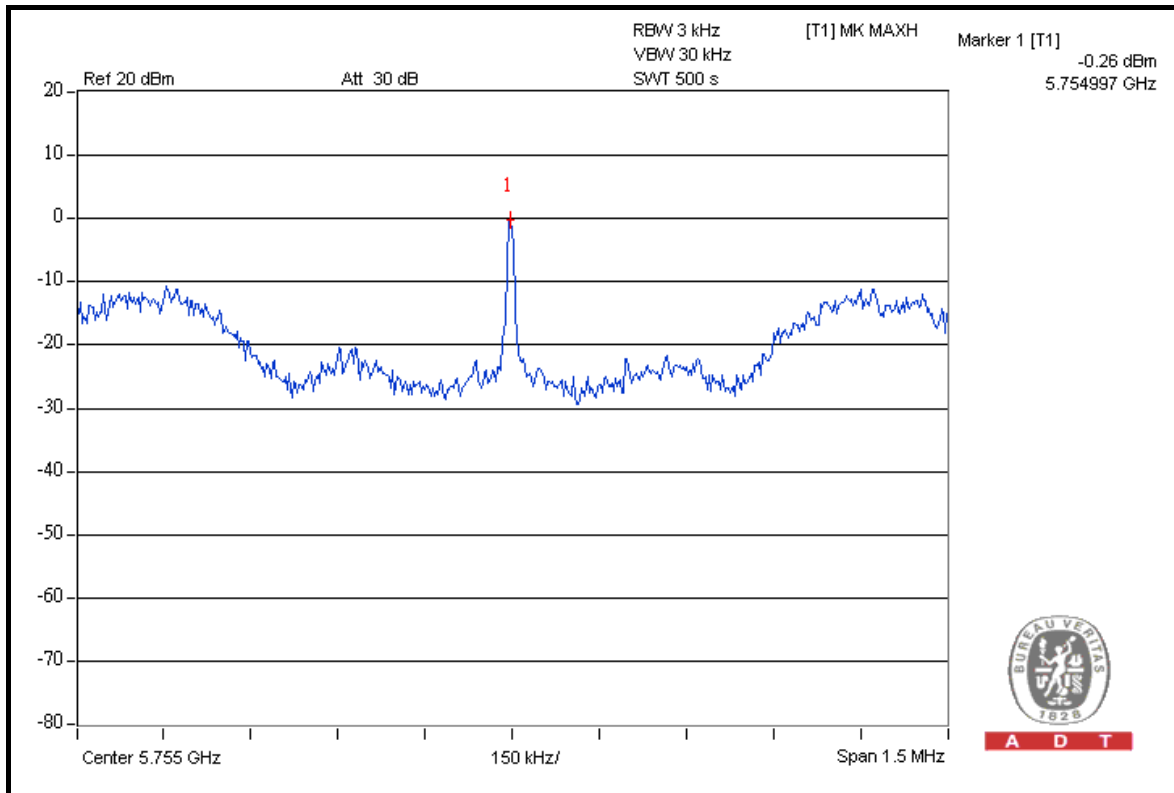

CH 159

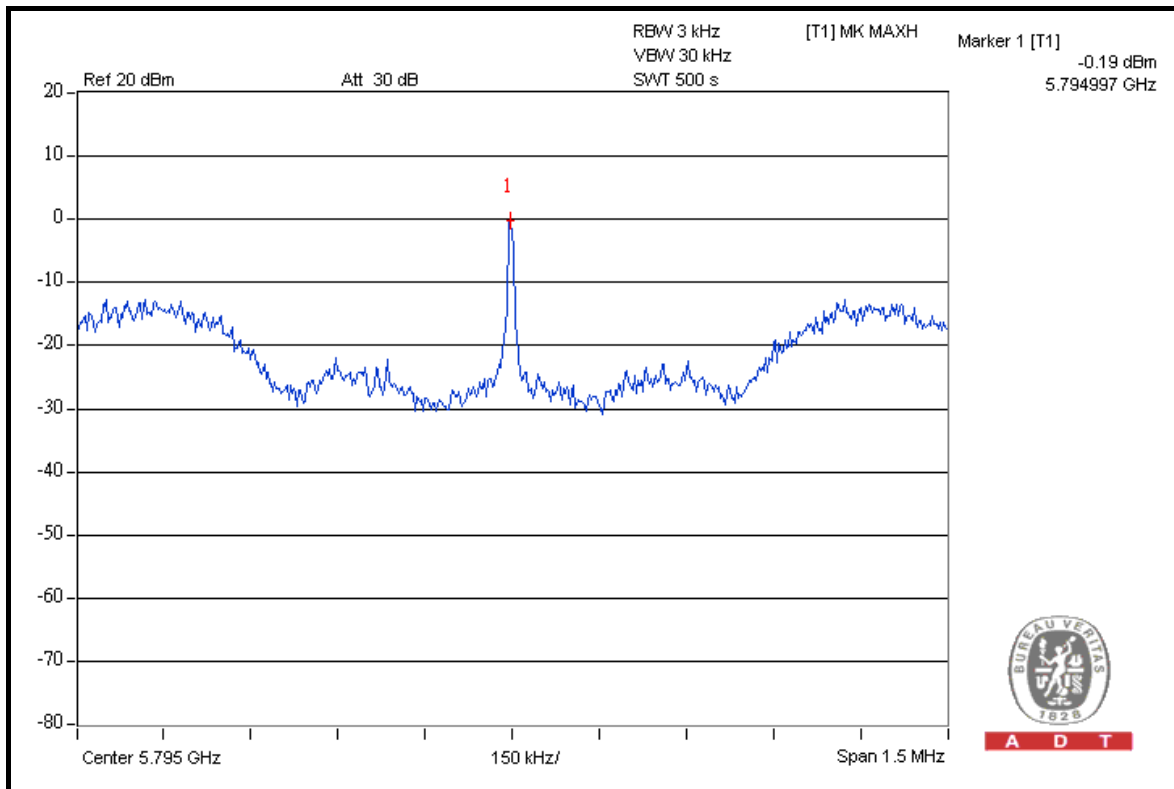



A D T

5.6 BAND EDGES MEASUREMENT

5.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

5.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100212	May 28, 2008	May 27, 2009
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Aug. 08, 2008	Aug. 07, 2009
BILOG Antenna SCHWARZBECK	VULB9168	9168-156	Apr. 25, 2008	Apr. 24, 2009
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 07, 2008	Jan. 06, 2009
Preamplifier Agilent	8449B	3008A01911	Sep. 10, 2008	Sep. 09, 2009
Preamplifier Agilent	8447D	2944A10638	Dec. 26, 2008	Dec. 25, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218190/4 231241/4	May 20, 2008	May 19, 2009
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Aug. 09, 2008	Aug. 08, 2009
Software	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn Table Controller EMCO	2090	NA	NA	NA
Turn Table ADT.	TT100.	TT93021703	NA	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 9.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 460141.
 5. The IC Site Registration No. is IC 7450F-4.



A D T

5.6.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. Set both RBW and VBW of spectrum analyzer to 100kHz and 300kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

NOTE: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 1KHz for Average detection (AV) at frequency above 1GHz.



A D T

5.6.4 DEVIATION FROM TEST STANDARD

No deviation.

5.6.5 EUT OPERATING CONDITION

Same as Item 5.3.6.



5.6.6 TEST RESULTS

The spectrum plots are attached on the following pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).





A D T

802.11a OFDM MODULATION

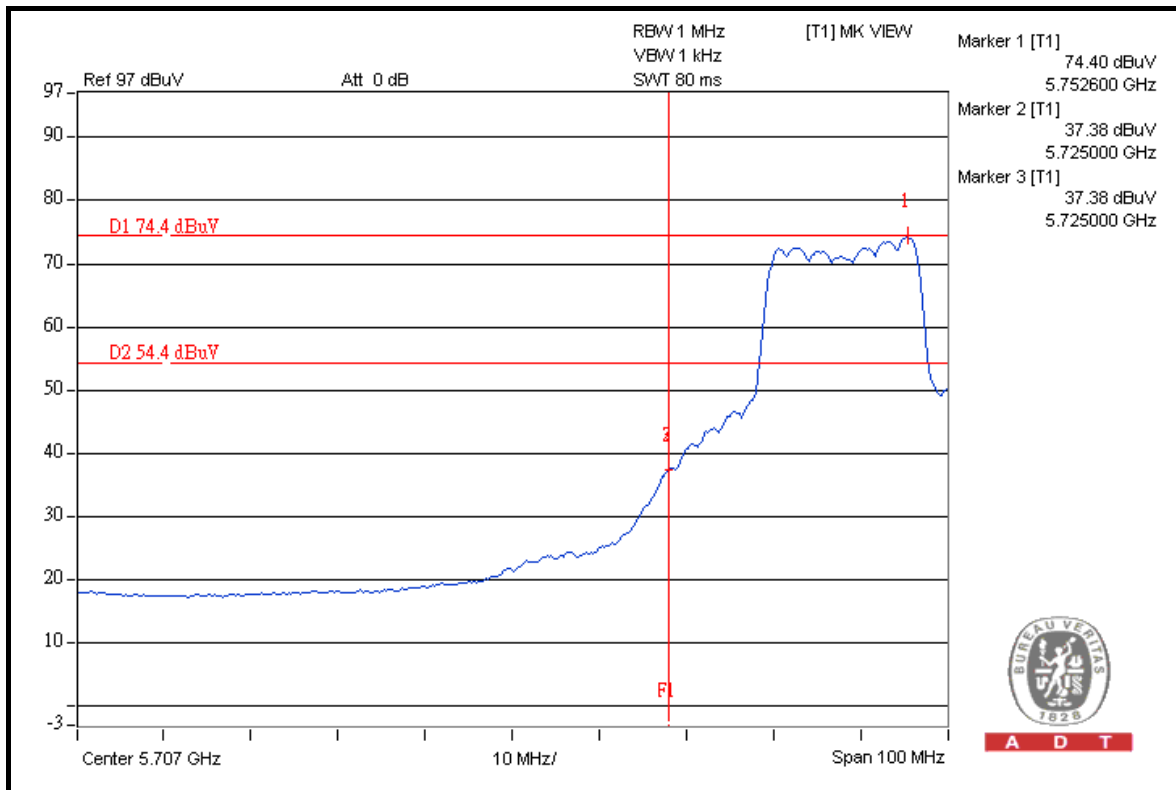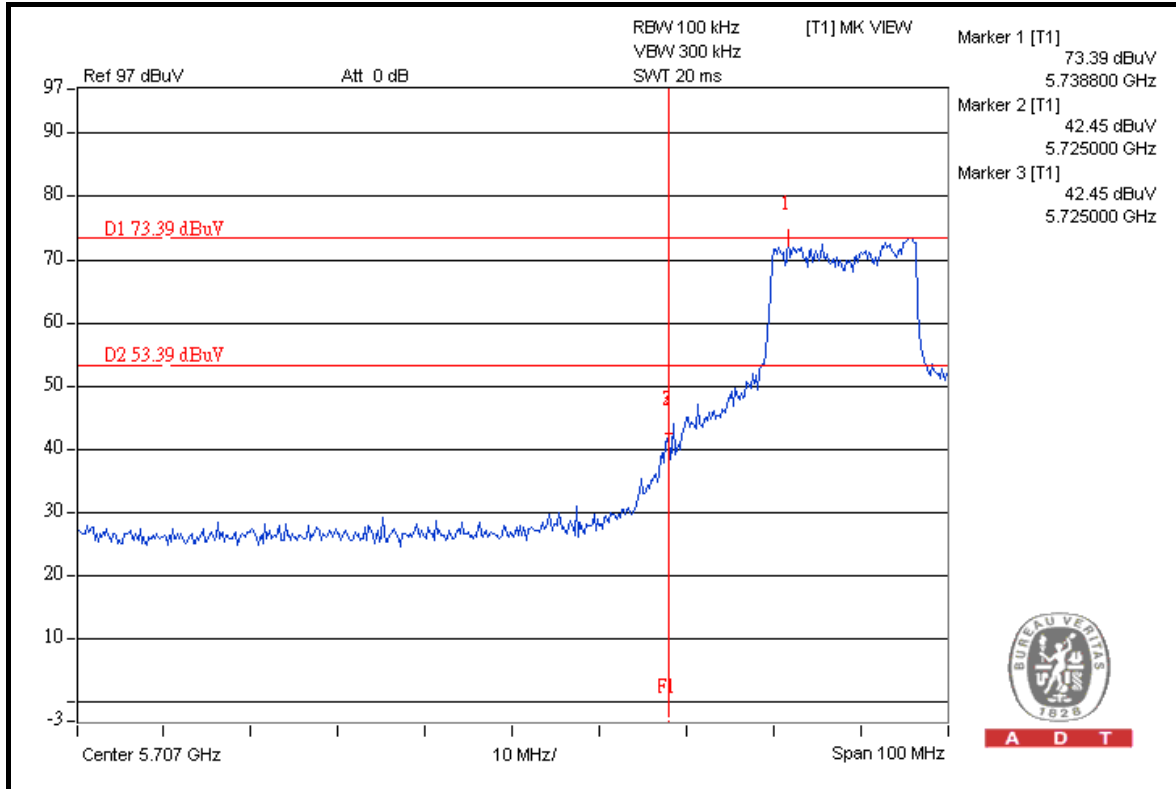





A D T

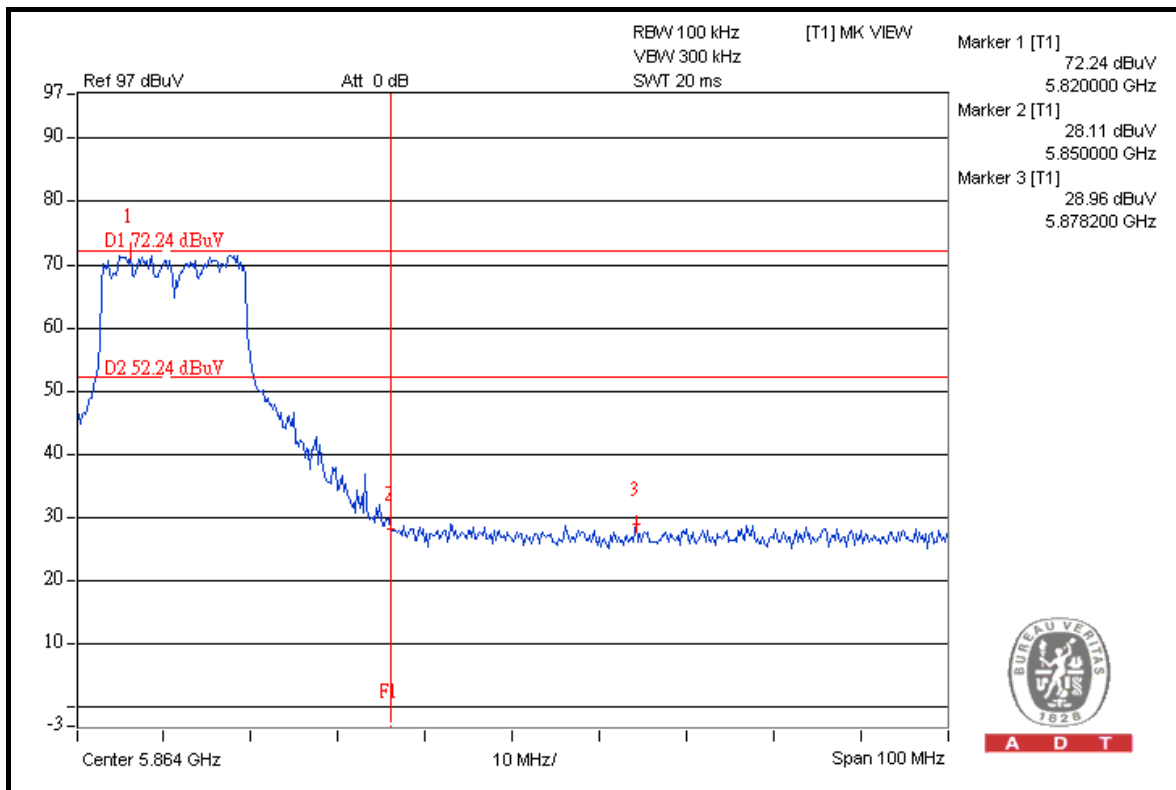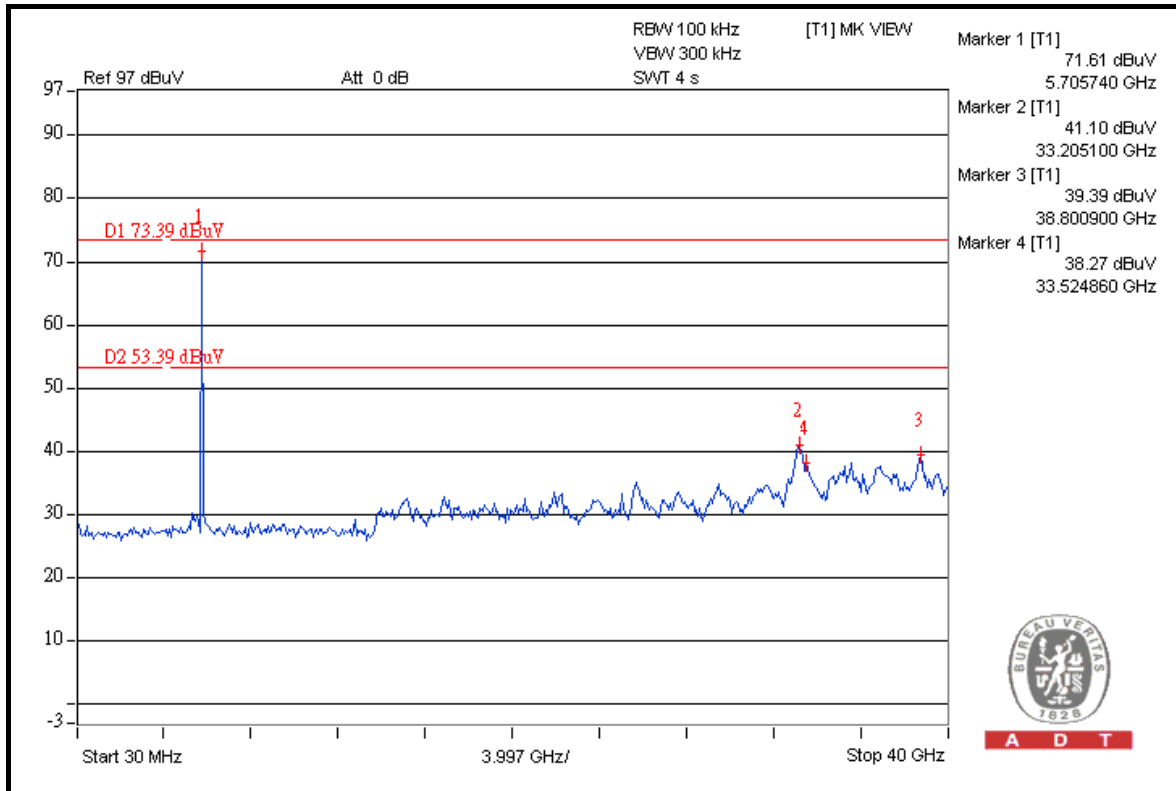





A D T

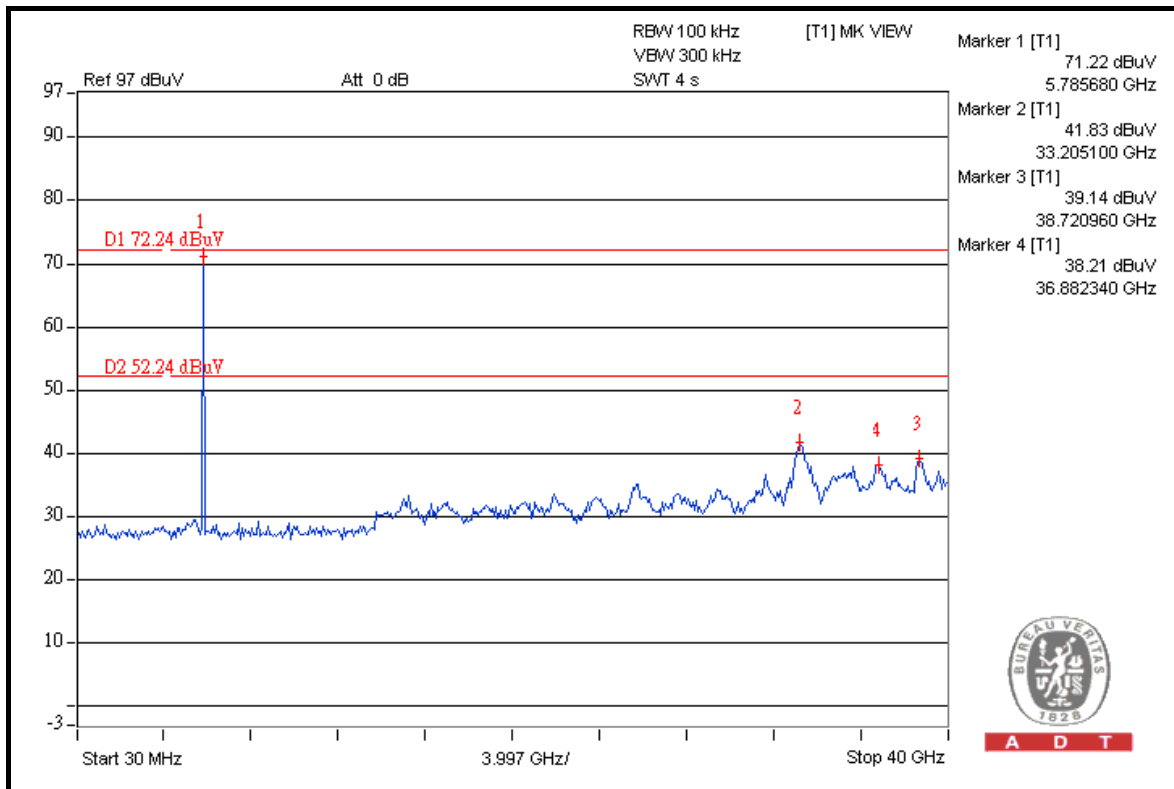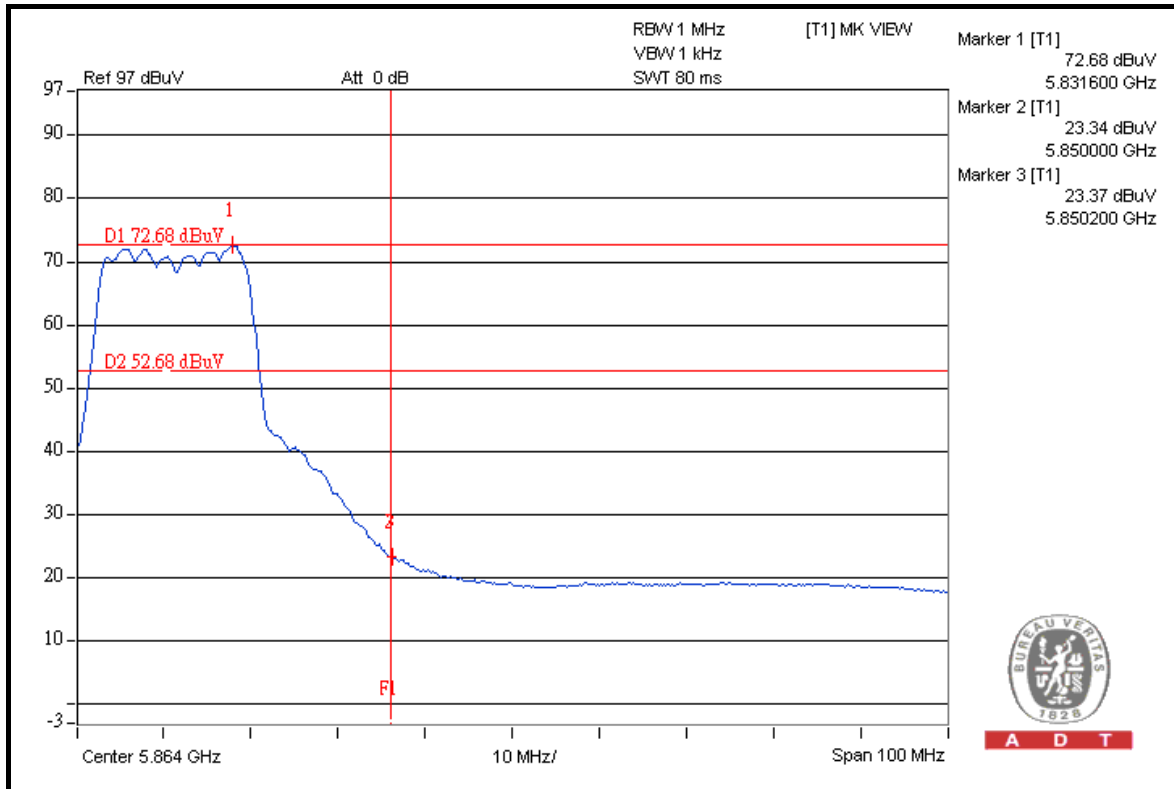





A D T

DRAFT 802.11n (20MHz) OFDM MODULATION

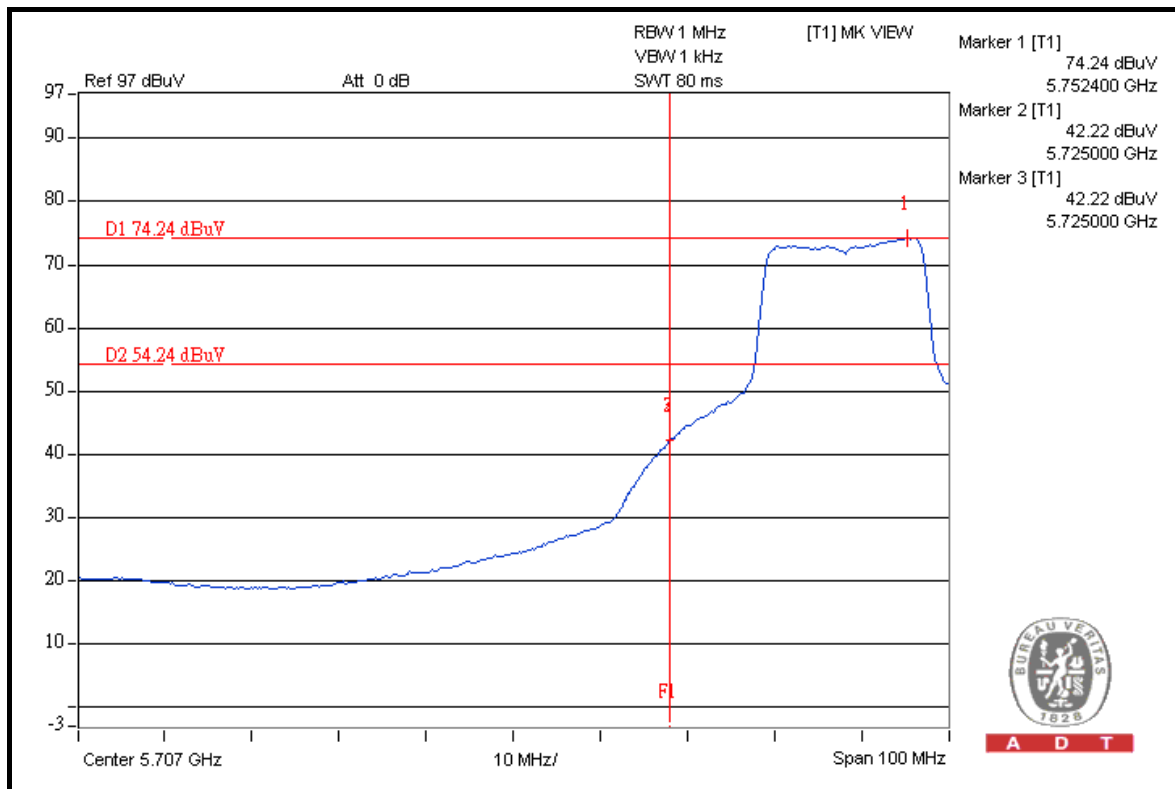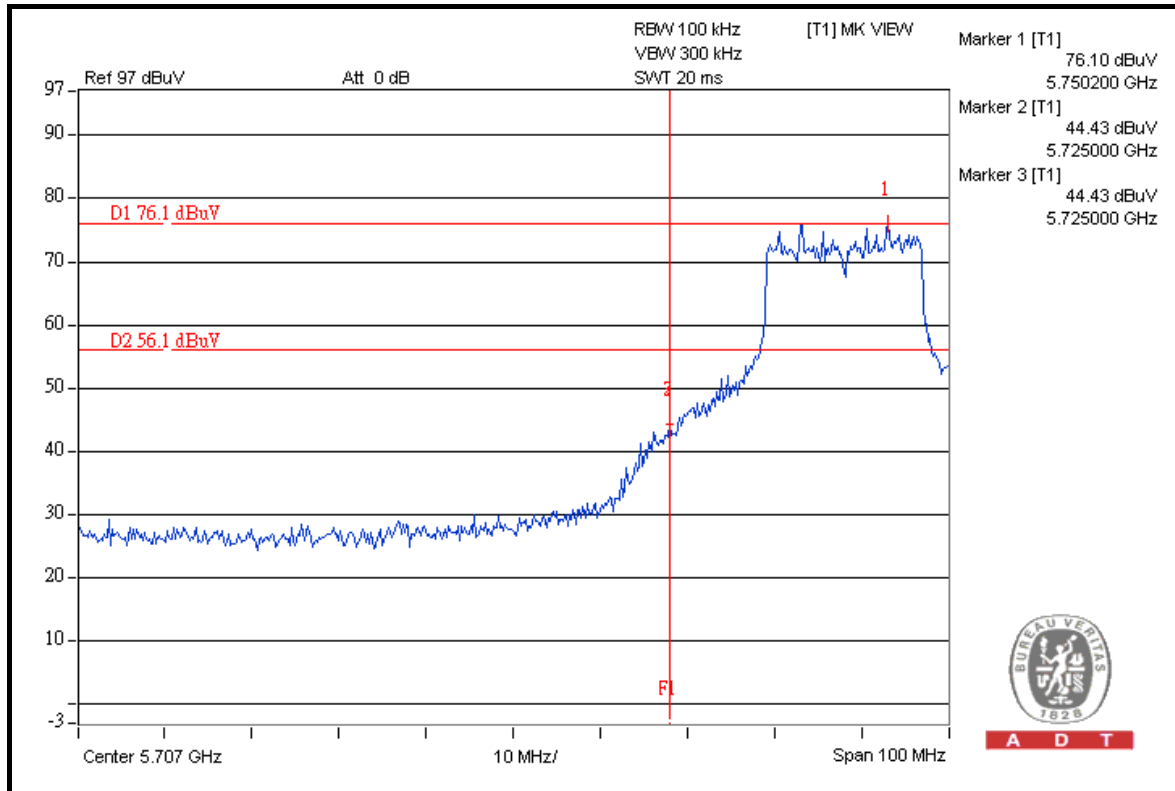




A D T

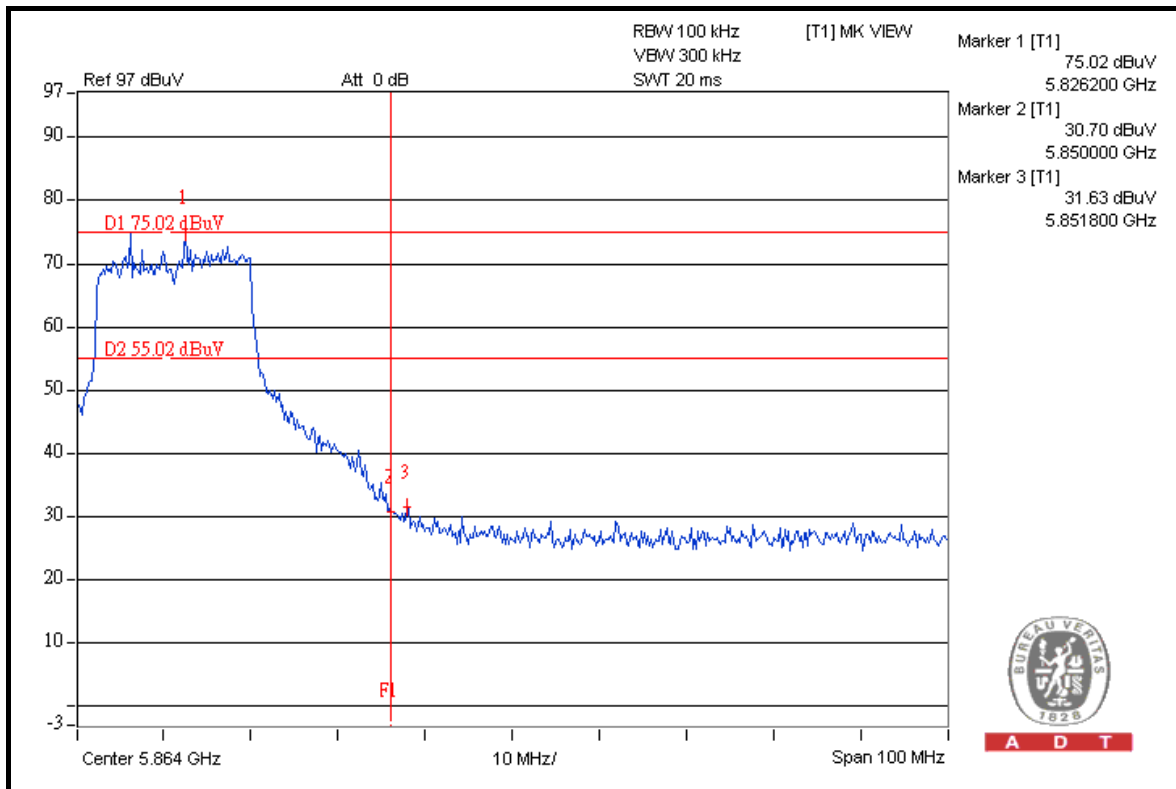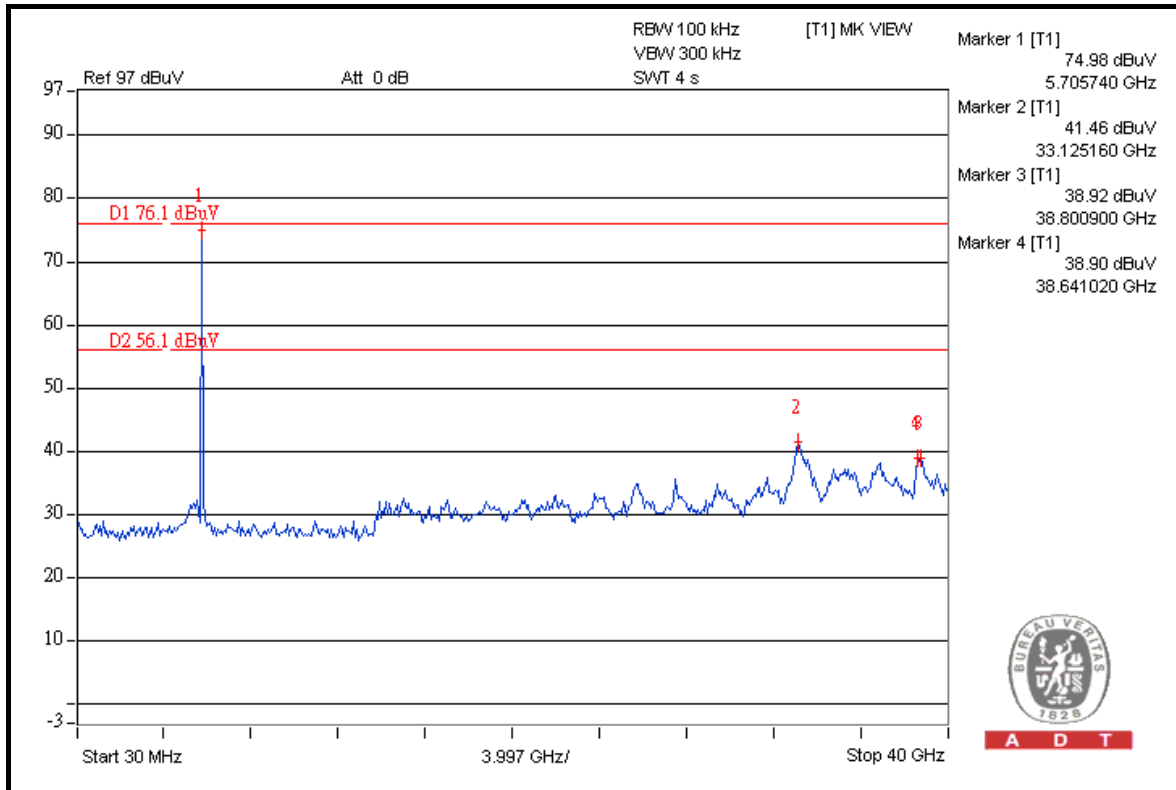




A D T

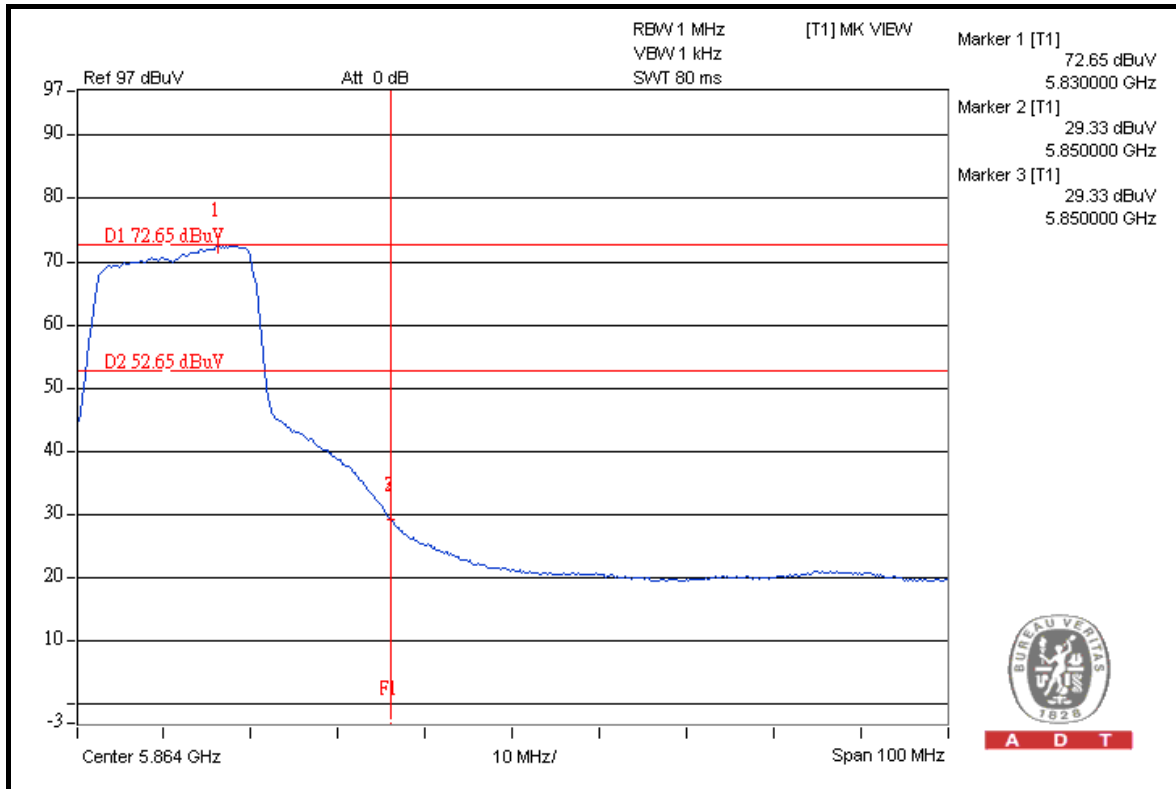

A D T

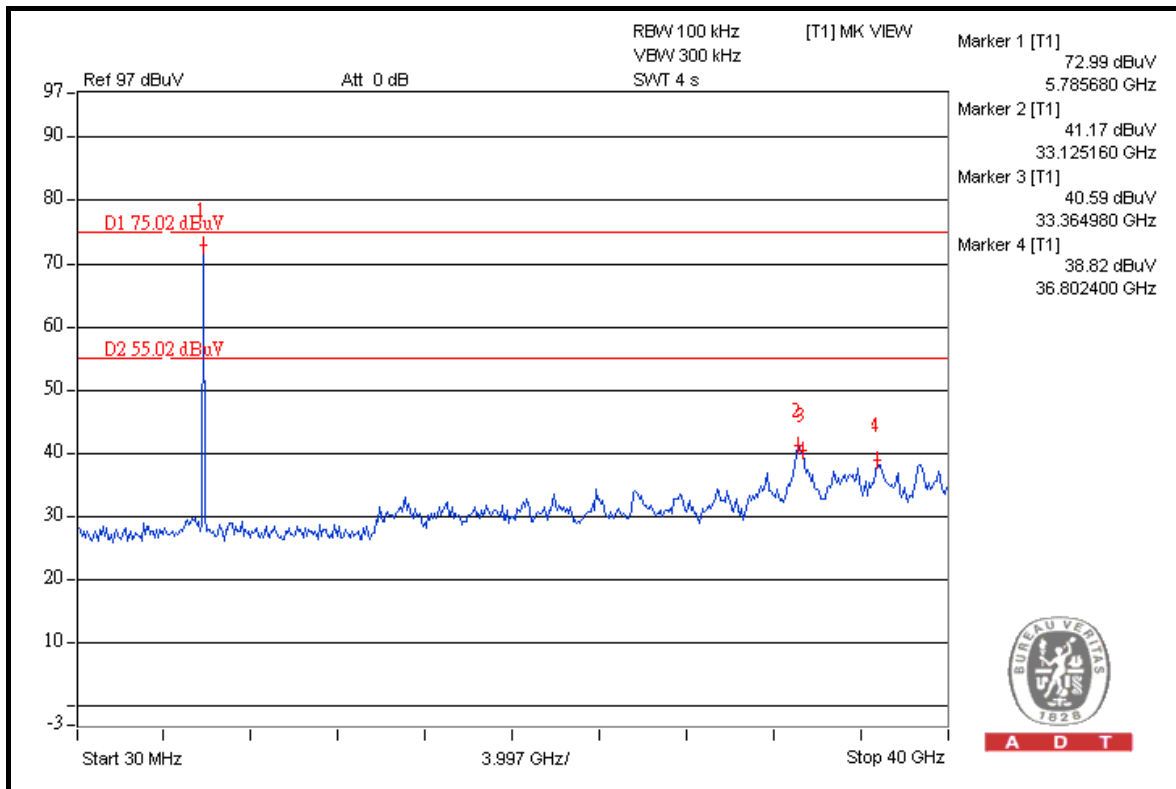


A D T




A D T

DRAFT 802.11n (40MHz) OFDM MODULATION

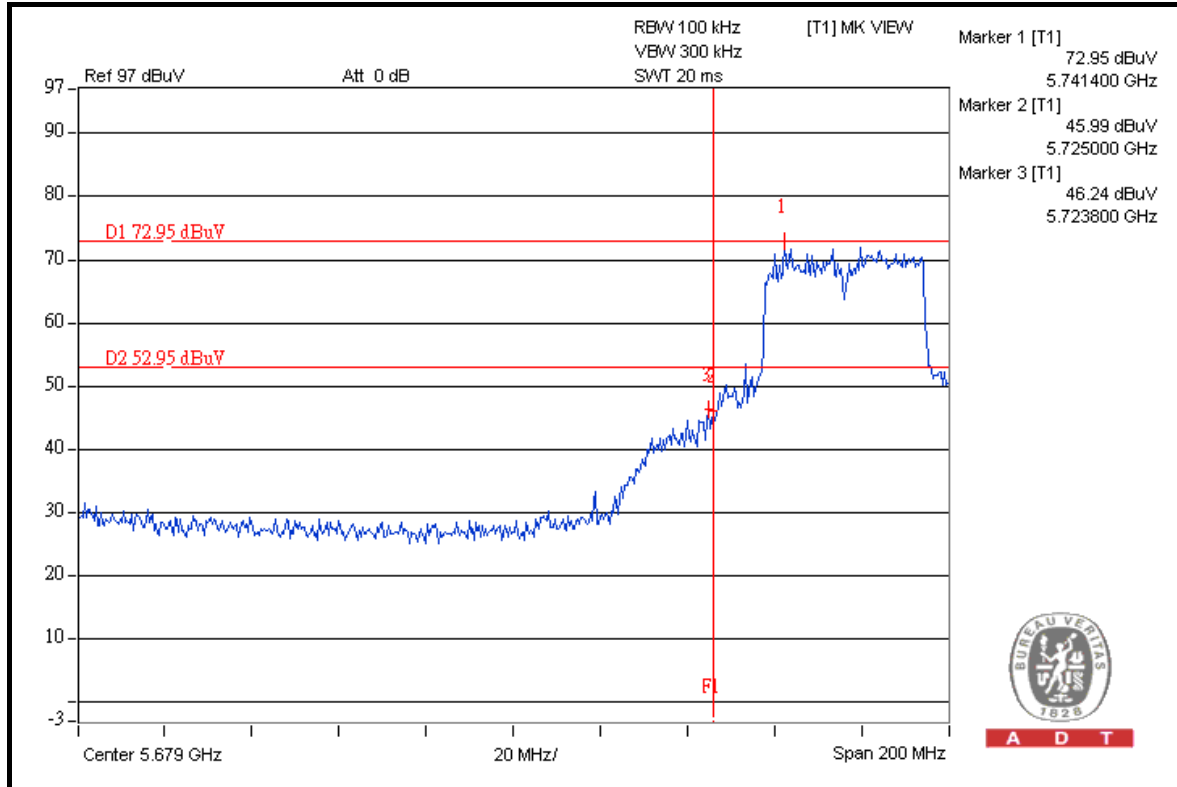


A D T

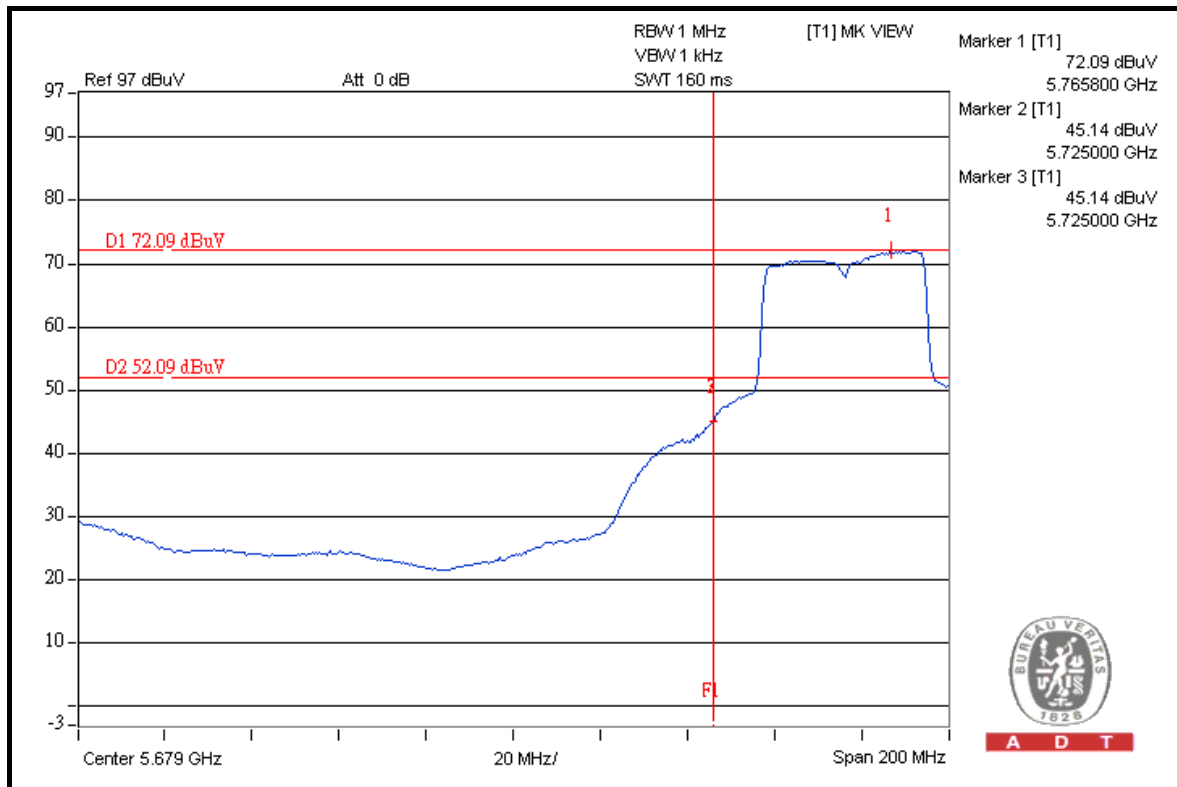


A D T



A D T

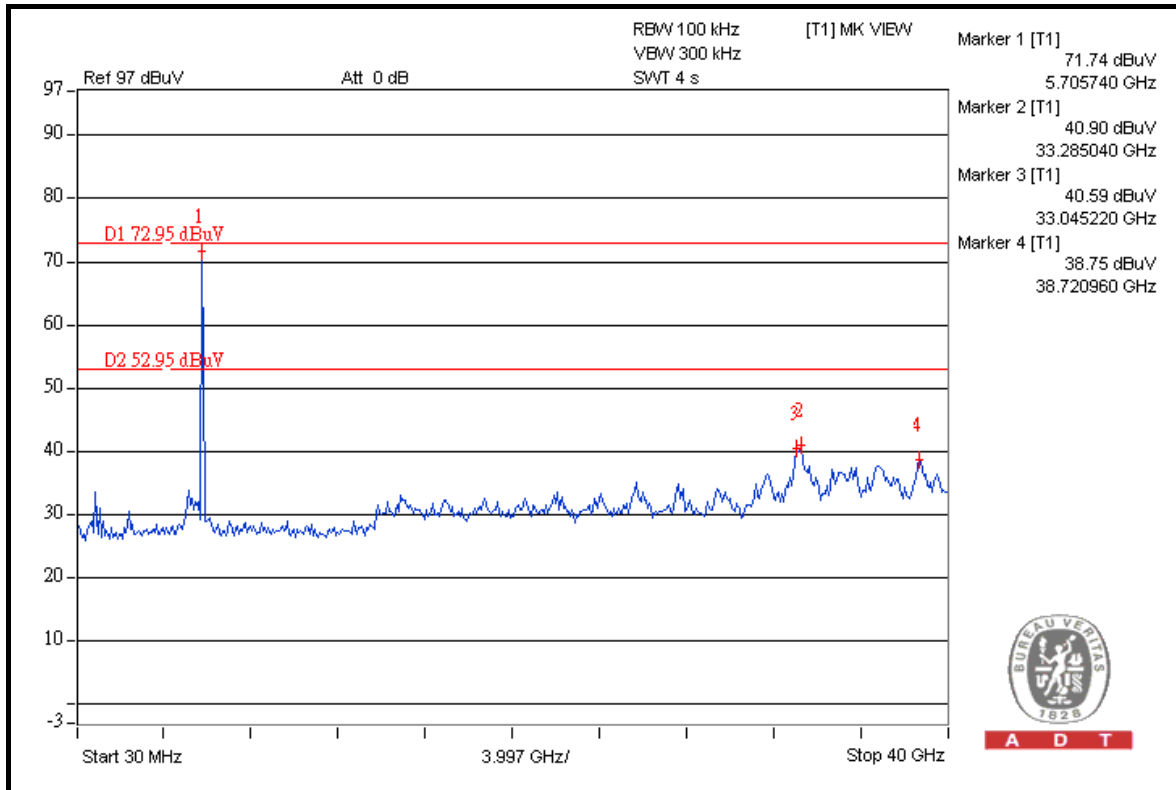



A D T

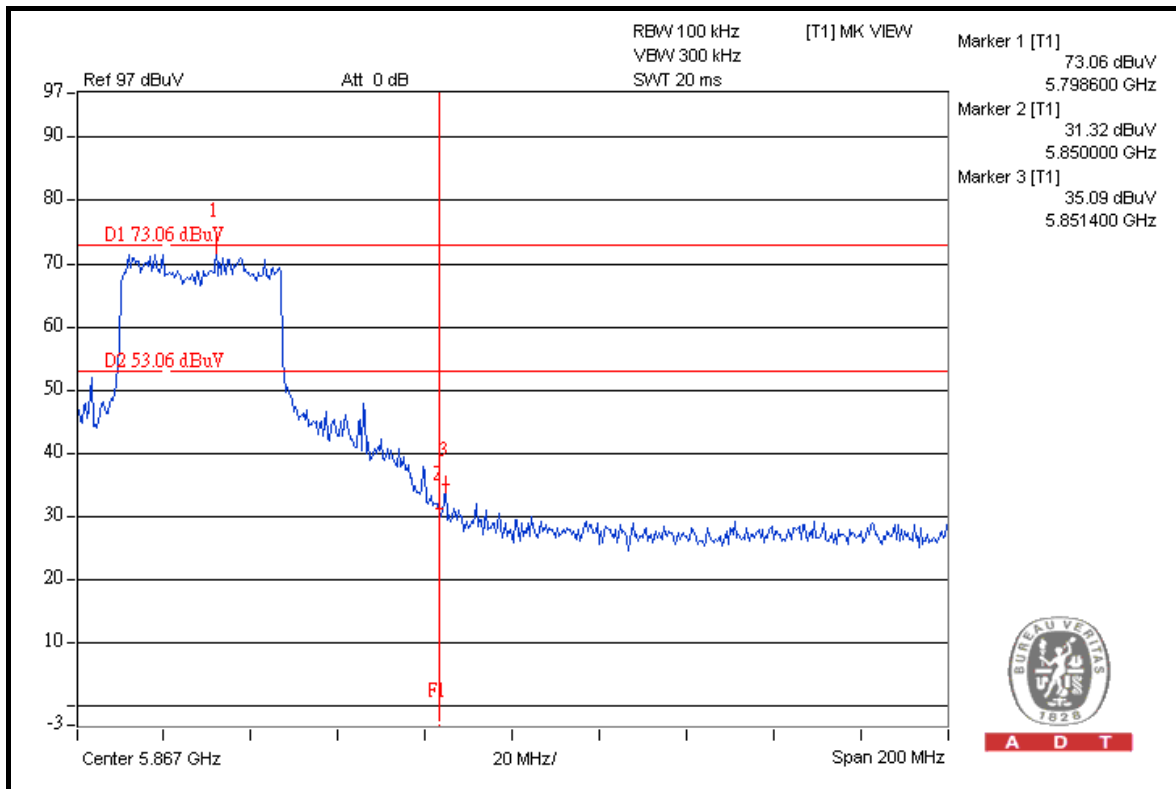

A D T



A D T

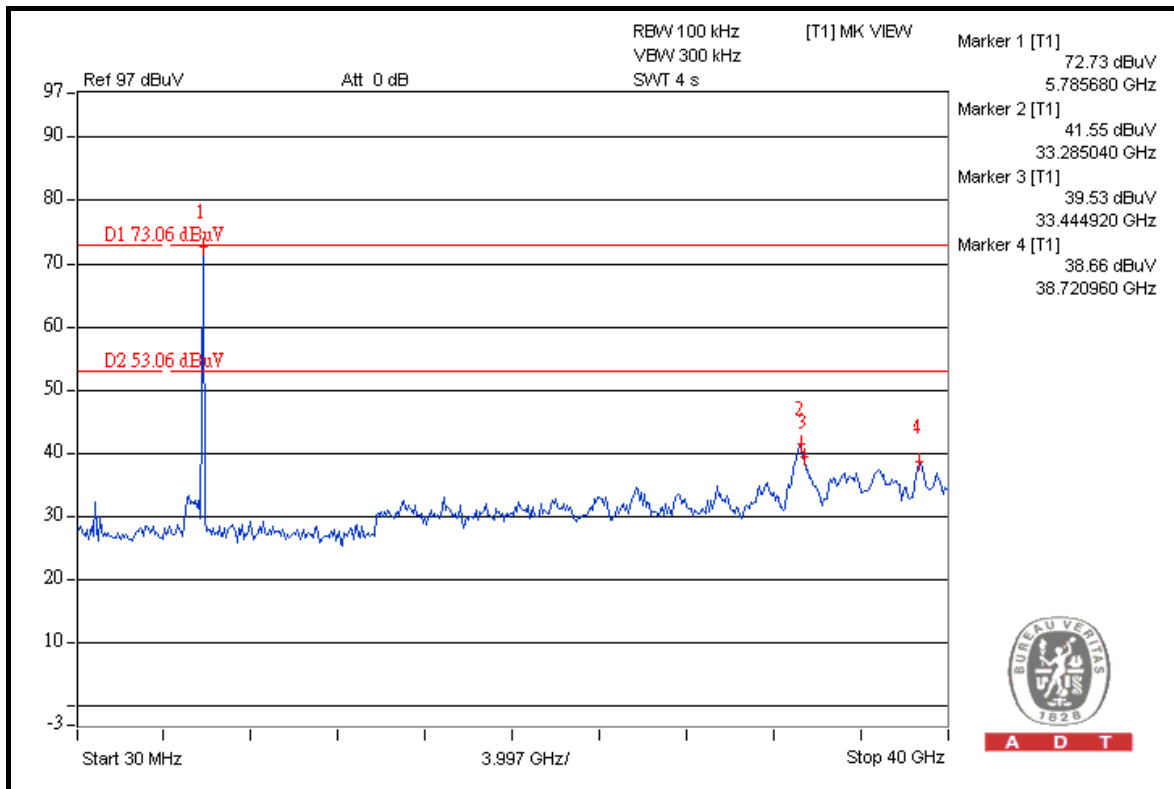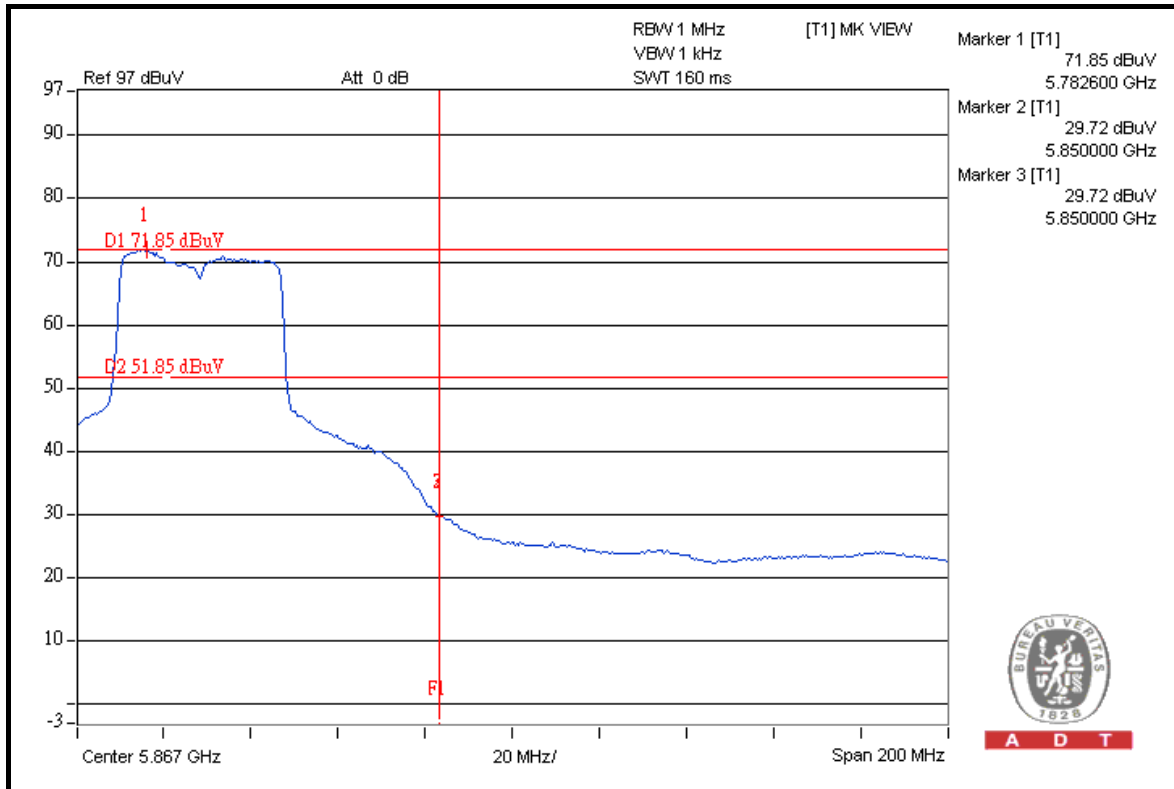



A D T

5.7 ANTENNA REQUIREMENT

5.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247(a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

5.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is PIFA antenna with UFL connector. The maximum gain of the antenna is 4.35dBi.



A D T

6. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

7. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

8. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---