



<b>EUT</b>	Wireless-G Broadband Router	<b>MODEL</b>	WRT54G
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak (PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	27 deg. C, 68%RH, 965 hPa	<b>TESTED BY</b>	Eric Lee

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1510.00	40.7 PK	74.00	-33.30	1.29 H	57	13.20	27.50
2	2320.00	40.1 PK	74.00	-33.90	1.53 H	299	10.50	29.60
3	*2462.00	97.5 PK			1.51 H	48	67.40	30.10
3	*2462.00	91.1 AV			1.51 H	48	61.00	27.50
4	2483.50	58.1 PK	74.00	-15.90	1.00 H	248	28.00	30.10
4	2483.50	48.1 AV	54.00	-5.90	1.00 H	248	18.00	29.60
5	2808.00	39.6 PK	74.00	-34.40	1.56 H	308	8.50	31.00
6	4924.00	42.8 PK	74.00	-31.20	1.63 H	320	6.10	36.70

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1510.00	42.3 PK	74.00	-31.70	1.45 V	247	14.90	27.50
2	2320.00	49.3 PK	74.00	-24.70	1.35 V	247	19.70	29.60
3	*2462.00	107.1 PK			1.21 V	2	77.10	30.10
3	*2462.00	97.1 AV			1.21 V	2	67.10	27.50
4	2483.50	59.8 PK	74.00	-14.20	1.48 V	68	29.70	30.10
4	2483.50	50.8 AV	54.00	-3.20	1.48 V	68	20.60	29.60
5	2808.00	42.3 PK	74.00	-31.70	1.43 V	61	11.30	31.00
6	4924.00	47.8 PK	74.00	-26.20	1.35 V	26	11.10	36.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* “ : Fundamental frequency

## 4.2.13 TEST RESULTS –OFDM (B)

<b>EUT</b>	Wireless-G Broadband Router	<b>MODEL</b>	WRT54G
<b>MODE</b>	Channel 1	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak (PK) Average(AV)
<b>ENVIRONMENTAL CONDITIONS</b>	24 deg. C, 57%RH, 965 hPa	<b>TESTED BY</b>	Tony Chen

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2379.00	52.7 PK	74.00	-21.30	1.97 H	119	23.00	29.70
1	2379.00	43.5 AV	54.00	-10.50	1.97 H	119	13.80	29.70
2	*2412.00	98.3 PK			1.71 H	182	68.40	29.90
2	*2412.00	86.8 AV			1.71 H	182	56.90	29.90
3	2484.00	52.6 PK	74.00	-21.40	1.10 H	90	22.40	30.10
3	2484.00	43.7 AV	54.00	-10.30	1.10 H	90	13.60	30.10
4	3216.00	40.5 PK	74.00	-33.50	1.52 H	30	8.30	32.20
5	4824.00	37.7 PK	74.00	-36.30	1.43 H	219	1.50	36.20

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	37.8 PK	74.00	-36.20	1.69 V	102	10.10	27.70
2	2390.00	52.0 PK	74.00	-22.00	1.22 V	117	22.20	29.80
2	2390.00	45.3 AV	54.00	-8.70	1.22 V	117	15.50	27.70
3	*2412.00	105.5 PK			1.13 V	316	75.60	29.90
3	*2412.00	96.3 AV			1.13 V	316	66.40	29.80
4	2484.00	51.5 PK	74.00	-22.50	1.49 V	116	21.30	30.10
4	2484.00	43.6 AV	54.00	-10.40	1.49 V	116	13.40	29.90
5	4824.00	37.7 PK	74.00	-36.30	1.51 V	136	1.50	36.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* “ : Fundamental frequency

<b>EUT</b>	Wireless-G Broadband Router	<b>MODEL</b>	WRT54G
<b>MODE</b>	Channel 6	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak (PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	24 deg. C, 57%RH, 965 hPa	<b>TESTED BY</b>	Tony Chen

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2375.00	52.3 PK	74.00	-21.70	1.44 H	24	22.50	29.70
1	2375.00	43.6 AV	54.00	-10.40	1.44 H	24	13.80	29.70
2	*2437.00	99.8 PK			1.20 H	326	69.80	30.00
2	*2437.00	88.7 AV			1.20 H	326	58.70	30.00
3	2493.00	52.5 PK	74.00	-21.50	1.27 H	22	22.30	30.20
3	2493.00	44.1 AV	54.00	-9.90	1.27 H	22	14.00	30.20
4	3249.00	42.5 PK	74.00	-31.50	1.00 H	28	10.20	32.30
5	4874.00	38.5 PK	74.00	-35.50	1.35 H	50	2.00	36.50

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1264.00	33.2 PK	74.00	-40.80	1.02 V	30	6.50	26.70
2	2320.00	54.0 PK	74.00	-20.00	1.25 V	60	24.40	29.60
2	2320.00	45.4 AV	54.00	-8.60	1.25 V	60	15.80	26.70
3	*2437.00	105.1 PK			1.00 V	21	75.10	30.00
3	*2437.00	93.1 AV			1.00 V	21	63.10	29.60
4	2487.00	53.6 PK	74.00	-20.40	1.31 V	38	23.40	30.10
4	2487.00	44.0 AV	54.00	-10.00	1.31 V	38	13.80	30.00
5	4874.00	37.5 PK	74.00	-36.50	1.49 V	27	1.00	36.50

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* ” : Fundamental frequency

<b>EUT</b>	Wireless-G Broadband Router	<b>MODEL</b>	WRT54G
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak (PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	24 deg. C, 57%RH, 965 hPa	<b>TESTED BY</b>	Tony Chen

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	36.5 PK	74.00	-37.50	1.26 H	346	8.70	27.80
2	2361.00	53.3 PK	74.00	-20.70	1.39 H	156	23.60	29.70
2	2361.00	43.4 AV	54.00	-10.60	1.39 H	156	13.80	27.80
3	*2462.00	101.5 PK			1.00 H	104	71.40	30.10
3	*2462.00	89.4 AV			1.00 H	104	59.30	29.70
4	2484.00	52.8 PK	74.00	-21.20	1.30 H	18	22.70	30.10
4	2484.00	43.9 AV	54.00	-10.10	1.30 H	18	13.80	30.10
5	4924.00	37.7 PK	74.00	-36.30	1.15 H	296	1.10	36.70

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	38.0 PK	74.00	-36.00	1.00 V	329	10.20	27.80
2	2358.00	52.7 PK	74.00	-21.30	1.13 V	64	23.10	29.70
2	2358.00	43.4 AV	54.00	-10.60	1.13 V	64	13.70	27.80
3	*2462.00	105.7 PK			1.22 V	342	75.70	30.10
3	*2462.00	95.7 AV			1.22 V	342	65.70	29.70
4	2484.00	57.7 PK	74.00	-16.30	1.63 V	25	27.60	30.10
4	2484.00	44.8 AV	54.00	-9.20	1.63 V	25	14.60	30.10
5	4924.00	39.0 PK	74.00	-35.00	1.46 V	339	2.30	36.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. The limit value is defined as per 15.247
  6. “ \* “ : Fundamental frequency

### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP	1093.4495.30	Dec. 19, 2003


**NOTE:**

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

#### 4.3.4 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

#### 4.3.5 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

## 4.3.6 TEST RESULTS-DSSS

<b>EUT</b>	Wireless-G Broadband Router	<b>MODEL</b>	WRT54G
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	27 deg. C, 56 %RH, 965 hPa
<b>TESTED BY</b>	Tony Chen		


<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>6 dB BANDWIDTH (MHz)</b>	<b>MINIMUM LIMIT (MHz)</b>	<b>PASS/FAIL</b>
1	2412	10.16	0.5	PASS
6	2437	10.04	0.5	PASS
11	2462	9.96	0.5	PASS

CH1

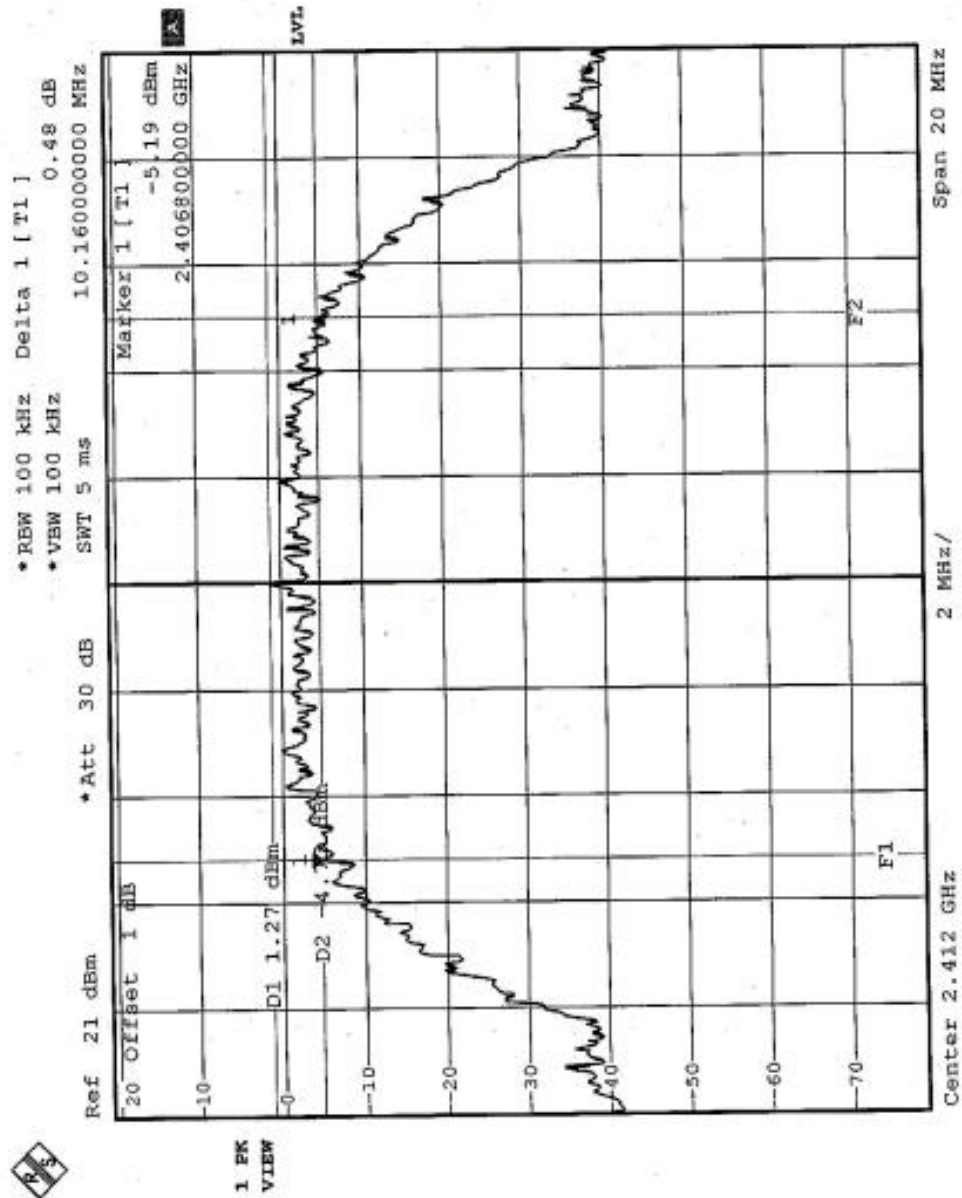




CH6

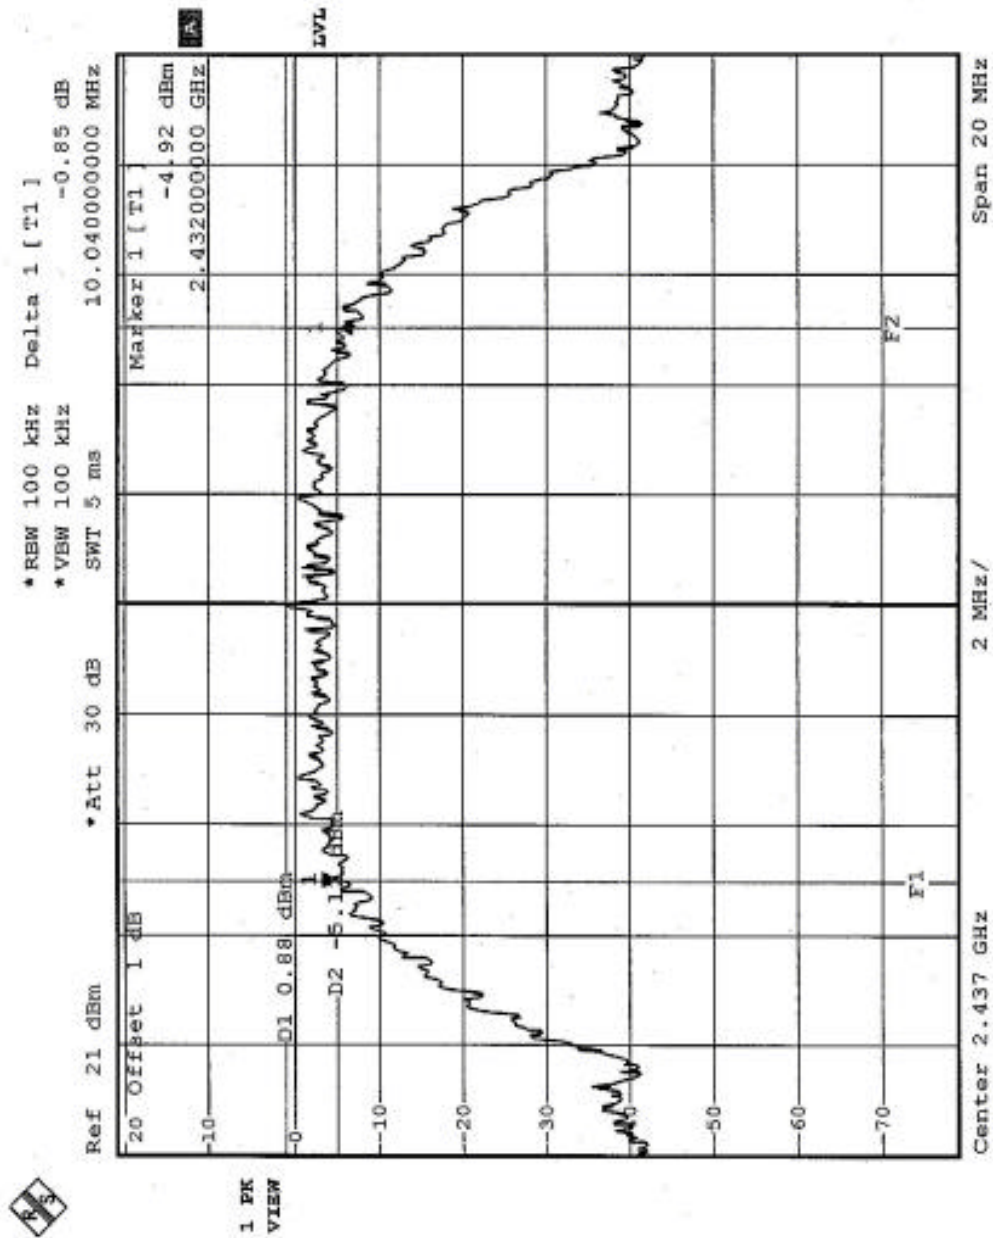

CH11

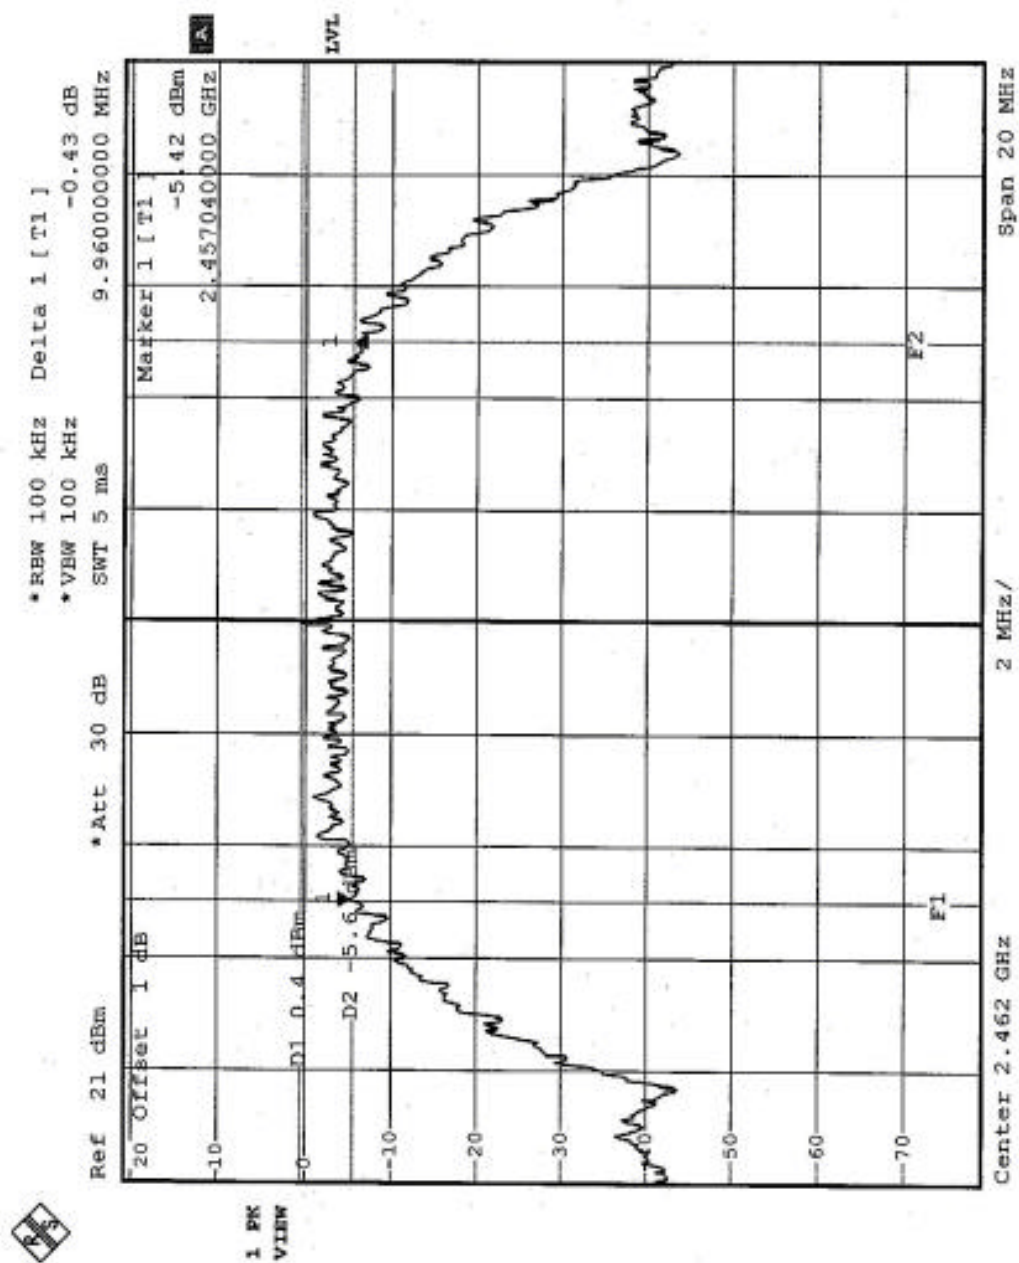


## 4.3.7 TEST RESULTS-OFDM


<b>EUT</b>	Wireless-G Broadband Router	<b>MODEL</b>	WRT54G
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	27 deg. C, 56 %RH, 965 hPa
<b>TESTED BY</b>	Tony Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.32	0.5	PASS
6	2437	16.28	0.5	PASS
11	2462	16.28	0.5	PASS


CH1

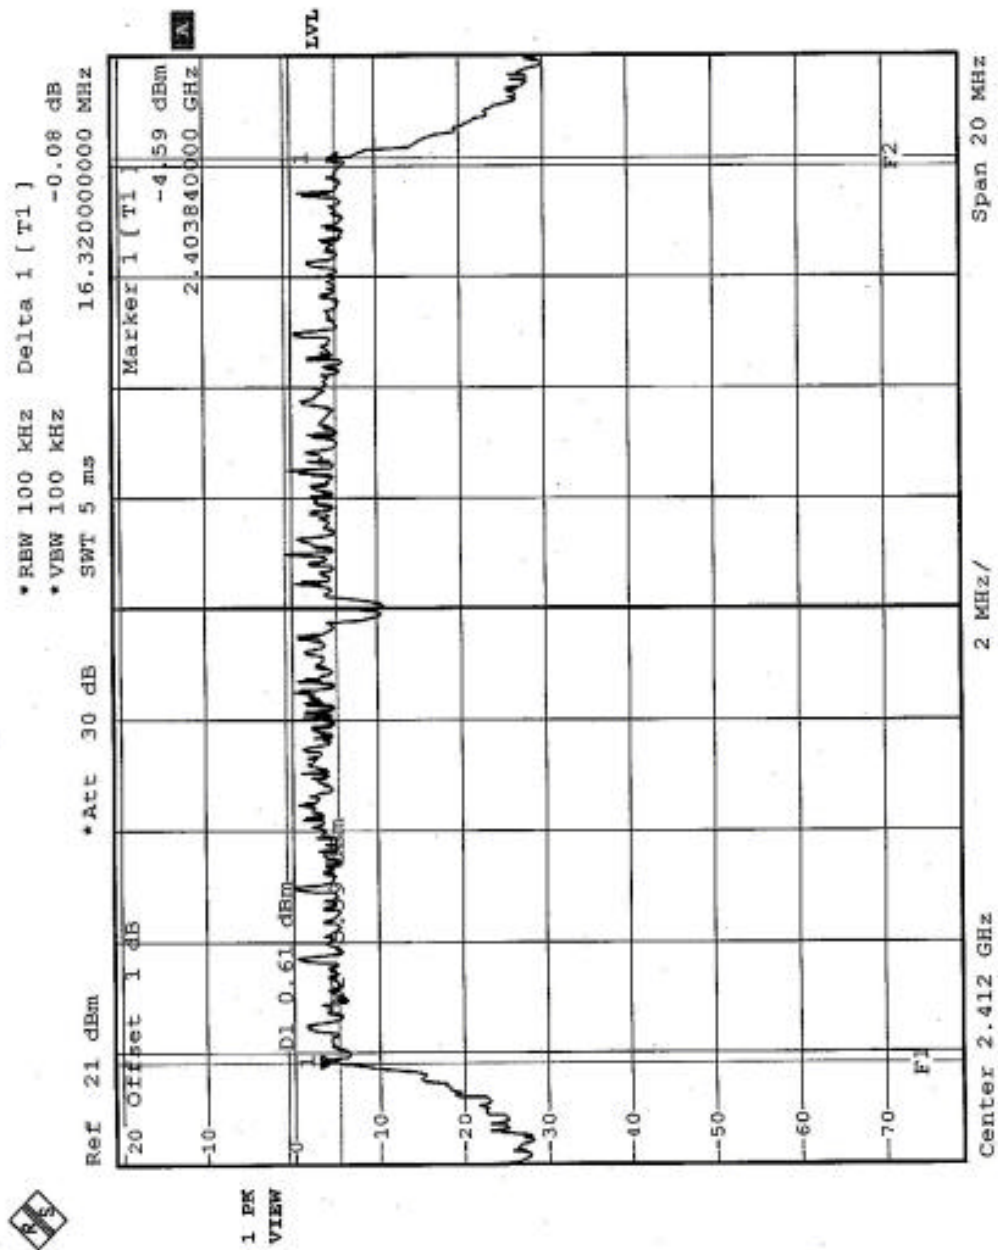

CH6

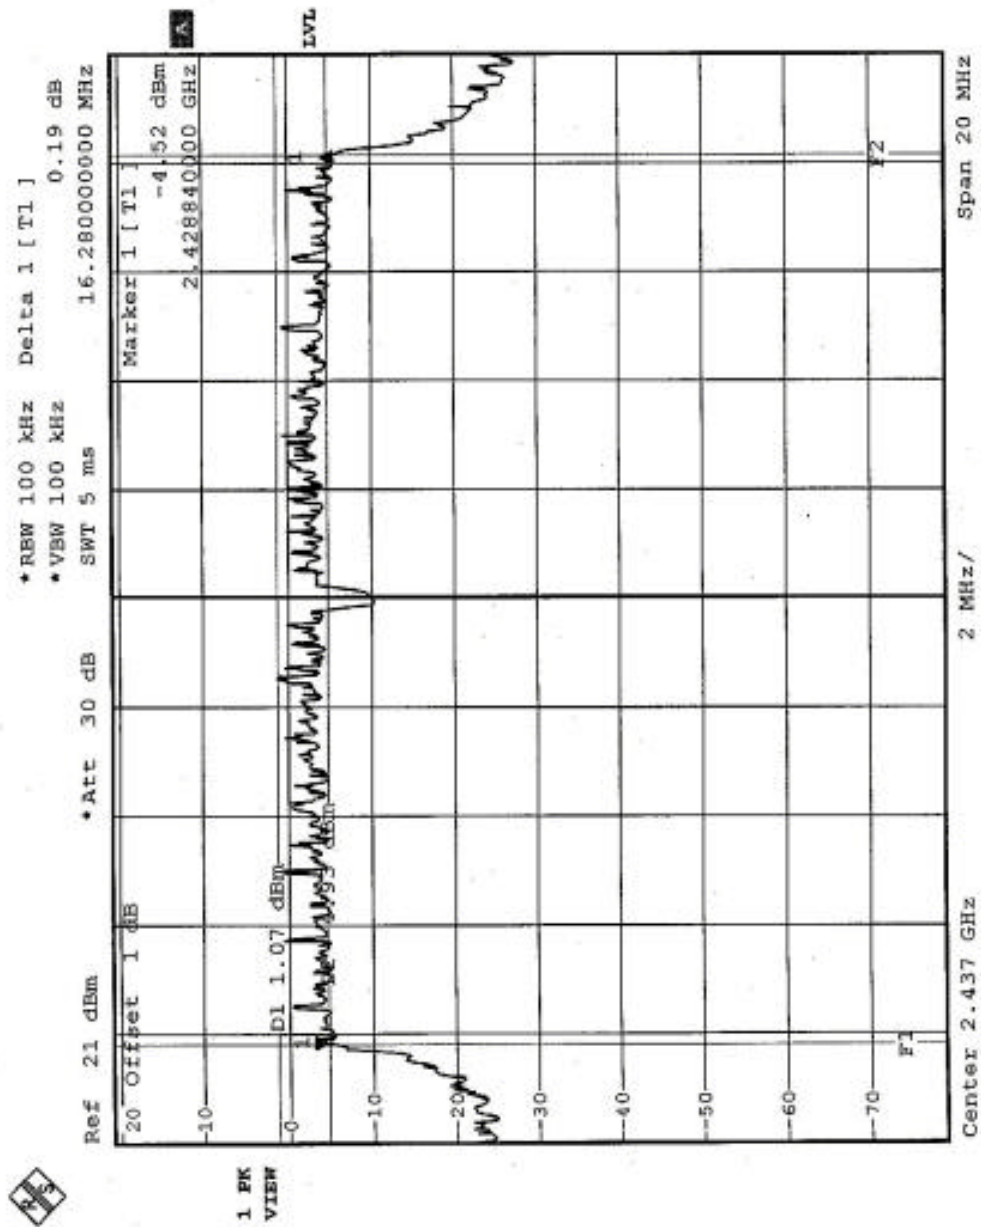

CH11

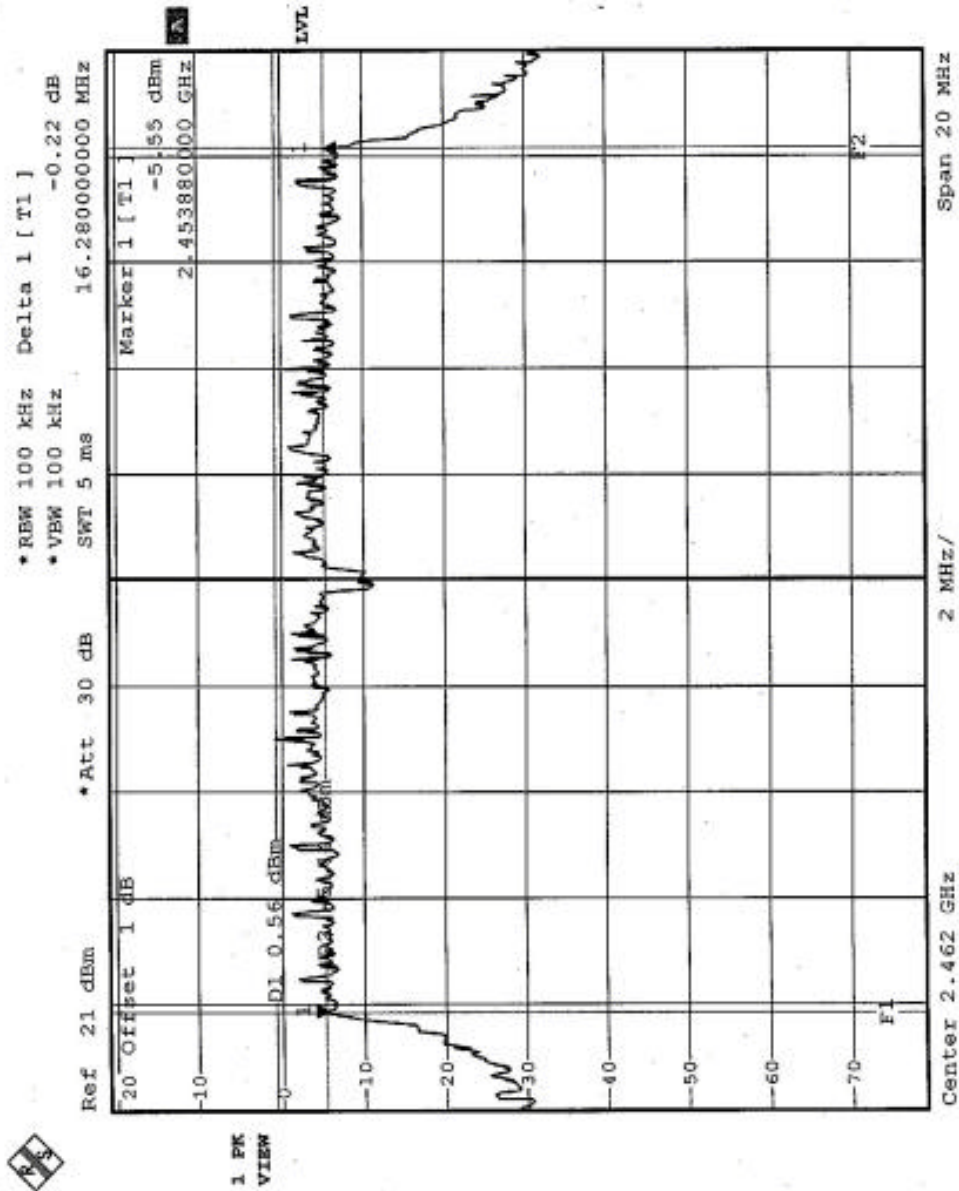

#### 4.4 MAXIMUM PEAK OUTPUT POWER

##### 4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

##### 4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Jul. 24, 2003
R&S SIGNAL GENERATOR	SMP04	100011	May 28, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	B048470	Mar. 05, 2004
NARDA DETECTOR	4503A	FSCM99899	NA


**NOTE:**

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

#### 4.4.4 TEST SETUP



#### 4.4.5 EUT OPERATING CONDITIONS

Same as Item 4.3.5



## 4.4.6 TEST RESULTS-DSSS

<b>EUT</b>	Wireless-G Broadband Router	<b>MODEL</b>	WRT54G
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	27 deg. C, 56 %RH, 965 hPa
<b>TESTED BY</b>	Tony Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	15.32	30	PASS
6	2437	14.54	30	PASS
11	2462	13.80	30	PASS

## 4.4.7 TEST RESULTS-OFDM

<b>EUT</b>	Wireless-G Broadband Router	<b>MODEL</b>	WRT54G
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	27 deg. C, 56 %RH, 965 hPa
<b>TESTED BY</b>	Tony Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	15.04	30	PASS
6	2437	16.24	30	PASS
11	2462	15.20	30	PASS

## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP	1093.4495.30	Dec. 19, 2003


**NOTE:**

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

#### 4.5.4 TEST SETUP



#### 4.5.5 EUT OPERATING CONDITIONS


Same as 4.3.5

## 4.5.6 TEST RESULTS-DSSS


<b>EUT</b>	Wireless-G Broadband Router	<b>MODEL</b>	WRT54G
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	27 deg. C, 56 %RH, 965 hPa
<b>TESTED BY</b>	Tony Chen		

<b>CHANNEL NUMBER</b>	<b>CHANNEL FREQUENCY (MHz )</b>	<b>RF POWER LEVEL IN 3 KHz BW (dBm)</b>	<b>MAXIMUM LIMIT (dBm)</b>	<b>PASS/FAIL</b>
1	2412	-4.78	8	PASS
6	2437	-5.22	8	PASS
11	2462	-5.89	8	PASS


CH1

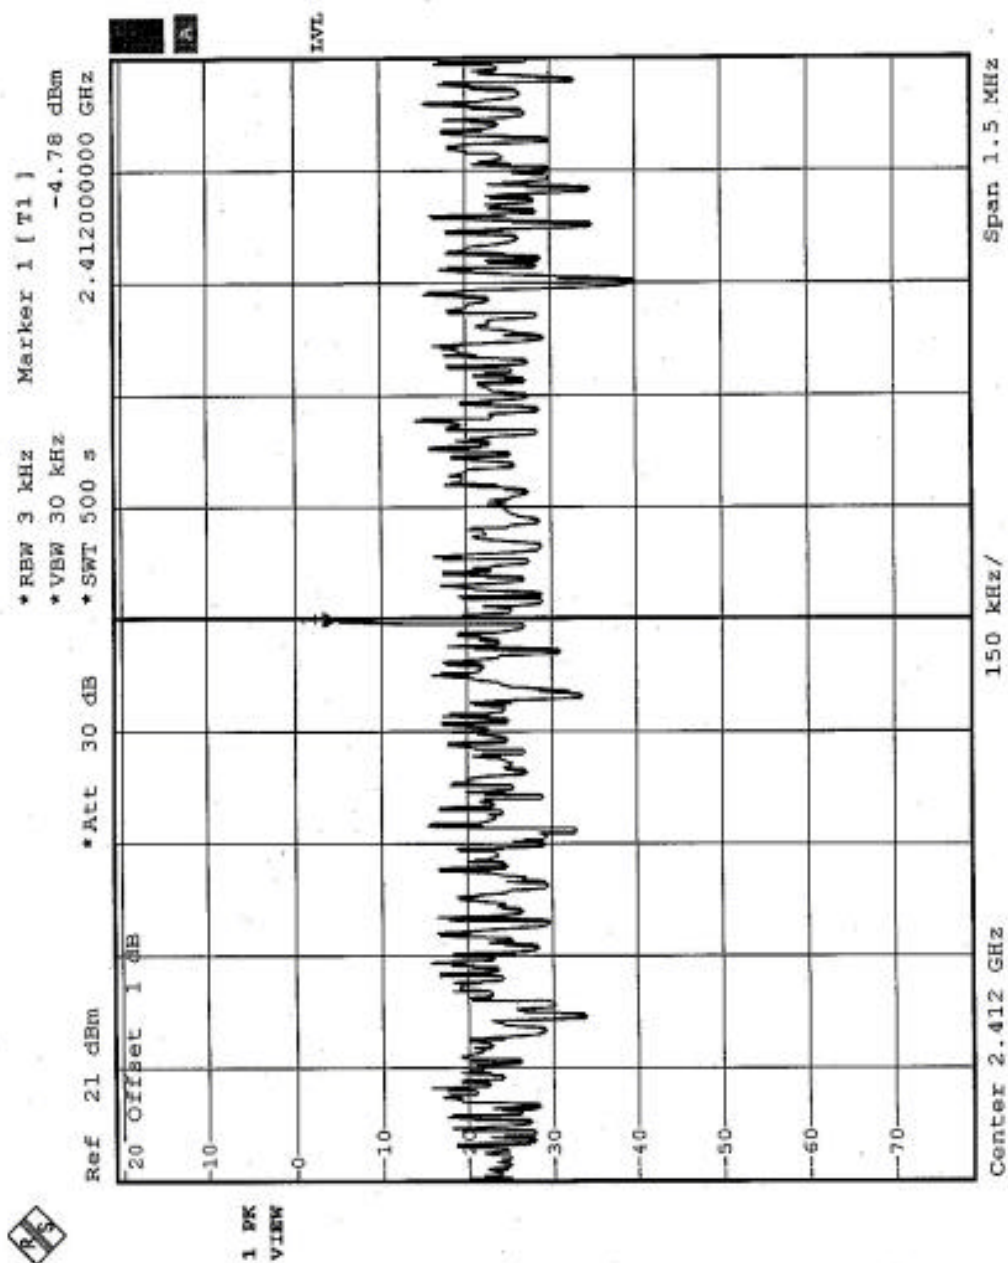

CH6

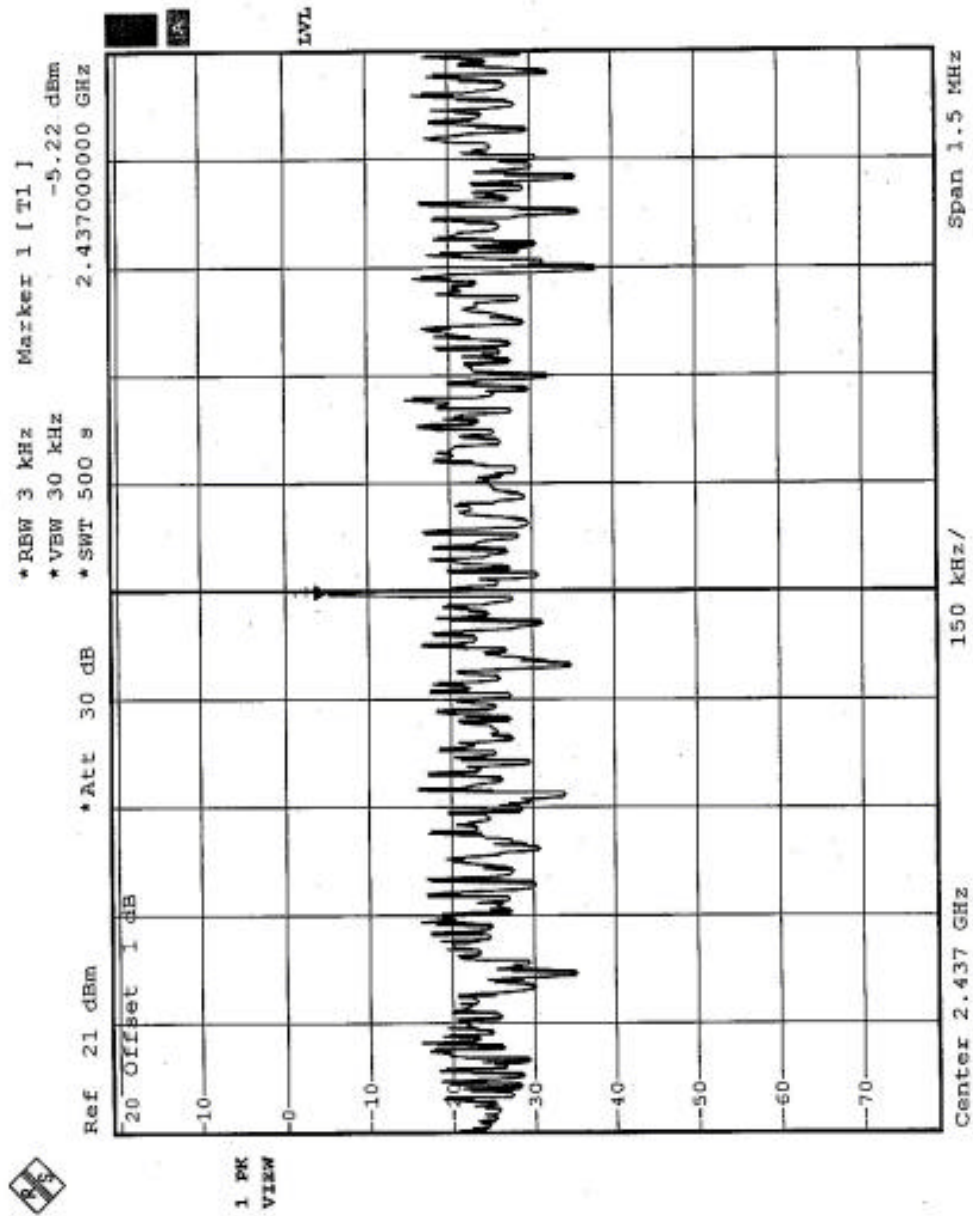

CH11

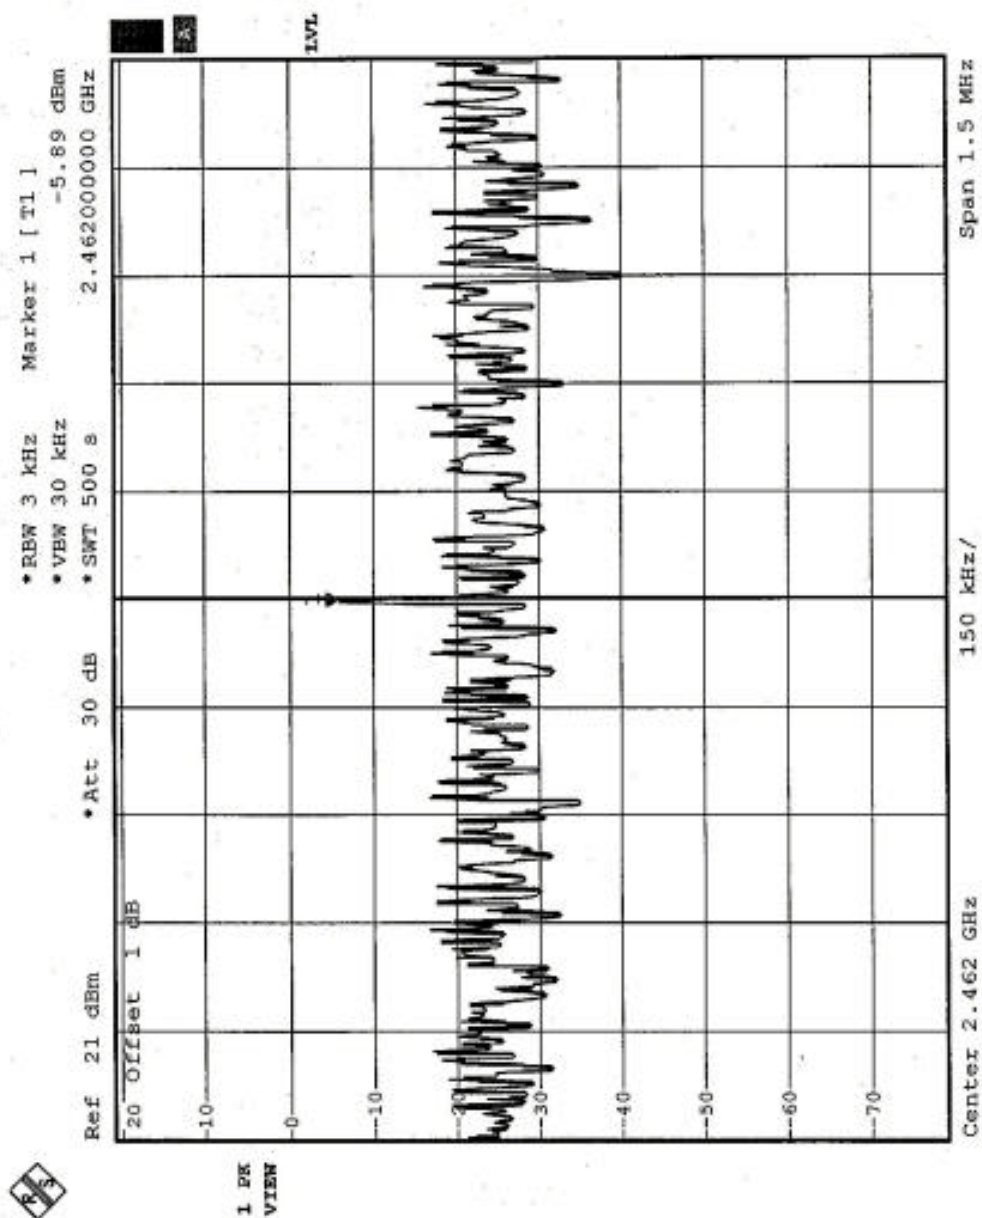


## 4.5.7 TEST RESULTS-OFDM

<b>EUT</b>	Wireless-G Broadband Router	<b>MODEL</b>	WRT54G
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	27 deg. C, 56 %RH, 965 hPa
<b>TESTED BY</b>	Tony Chen		


<b>CHANNEL NUMBER</b>	<b>CHANNEL FREQUENCY (MHz )</b>	<b>RF POWER LEVEL IN 3 KHz BW (dBm)</b>	<b>MAXIMUM LIMIT (dBm)</b>	<b>PASS/FAIL</b>
1	2412	-13.10	8	PASS
6	2437	-13.31	8	PASS
11	2462	-13.40	8	PASS




CH1

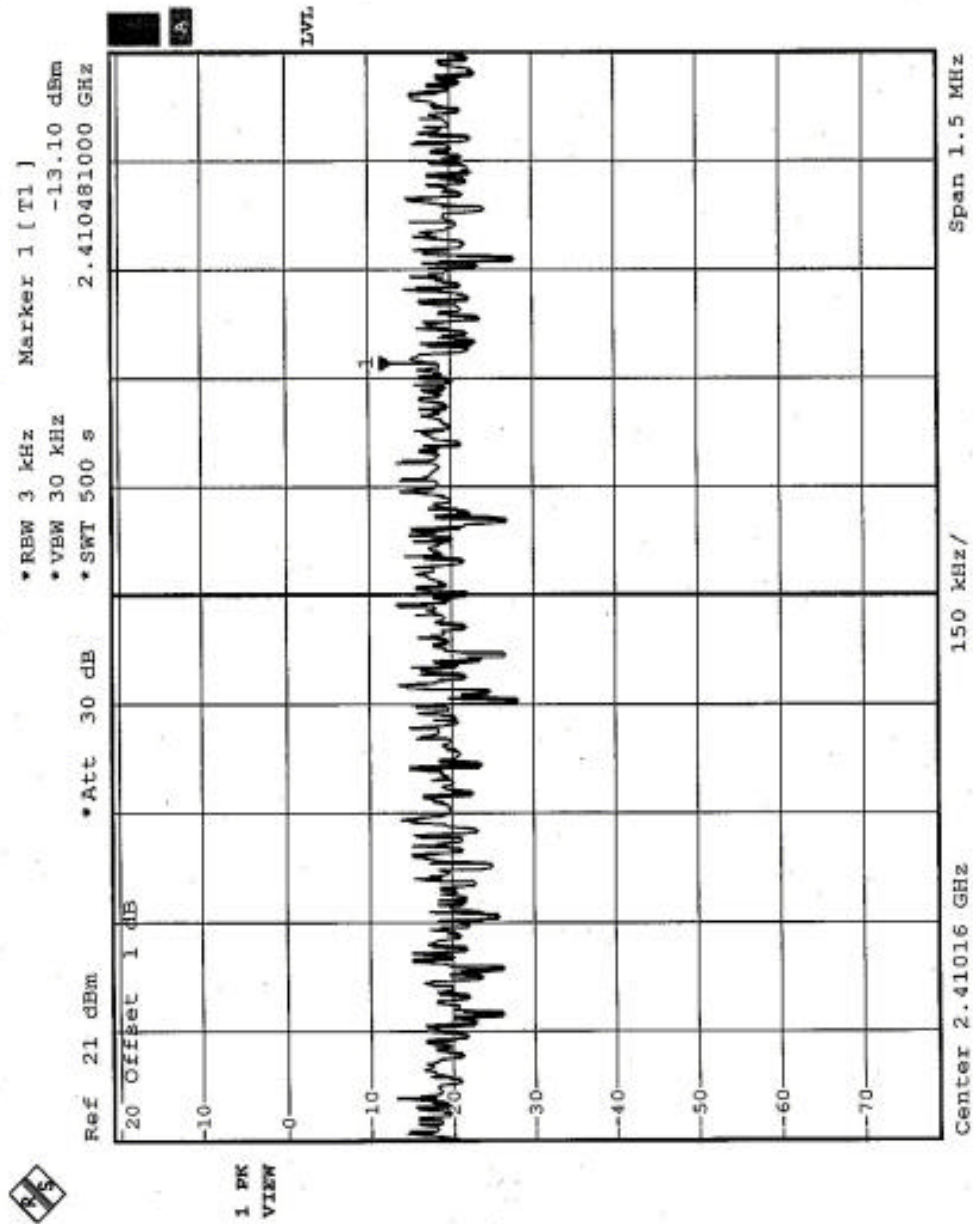

CH6

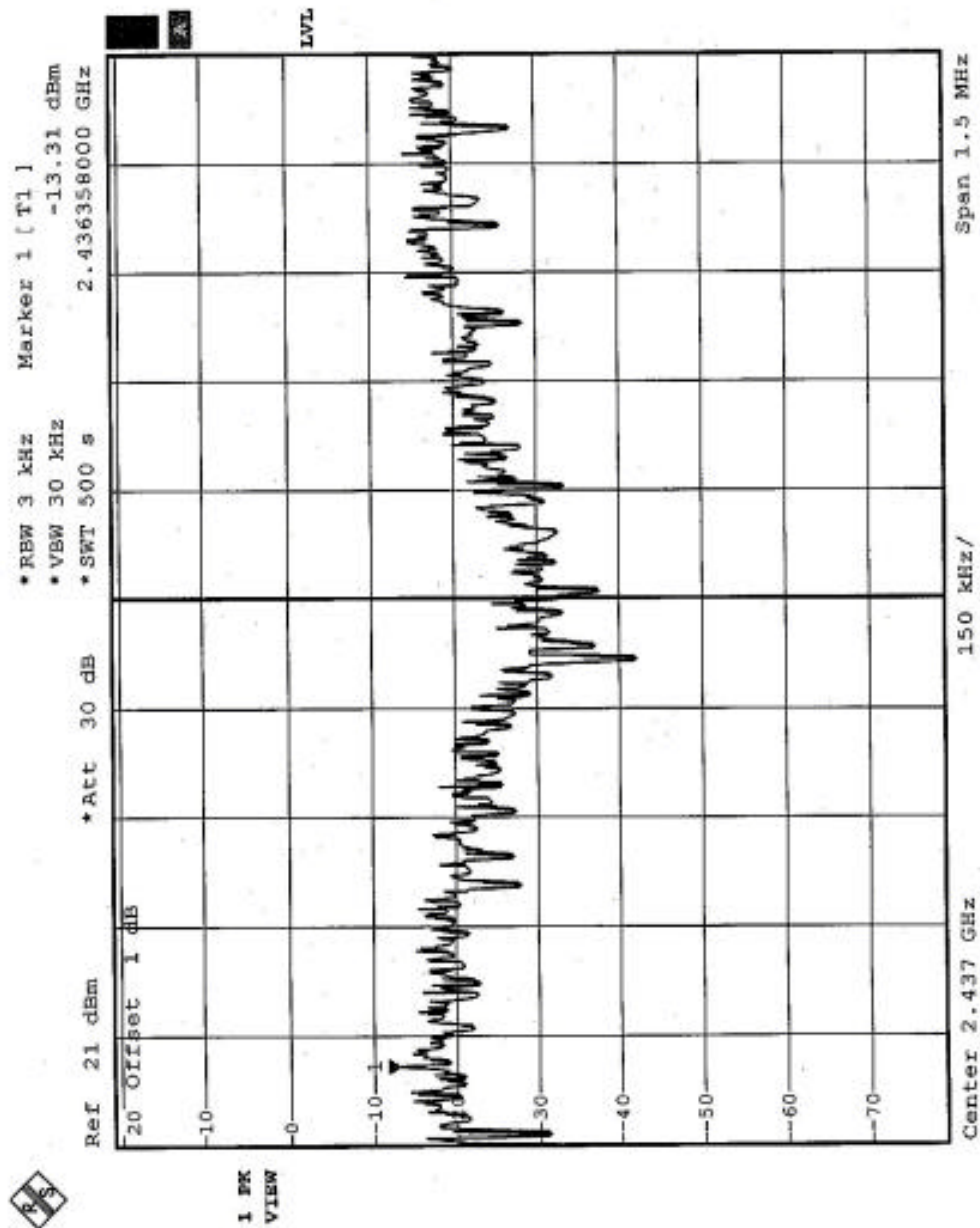

CH11

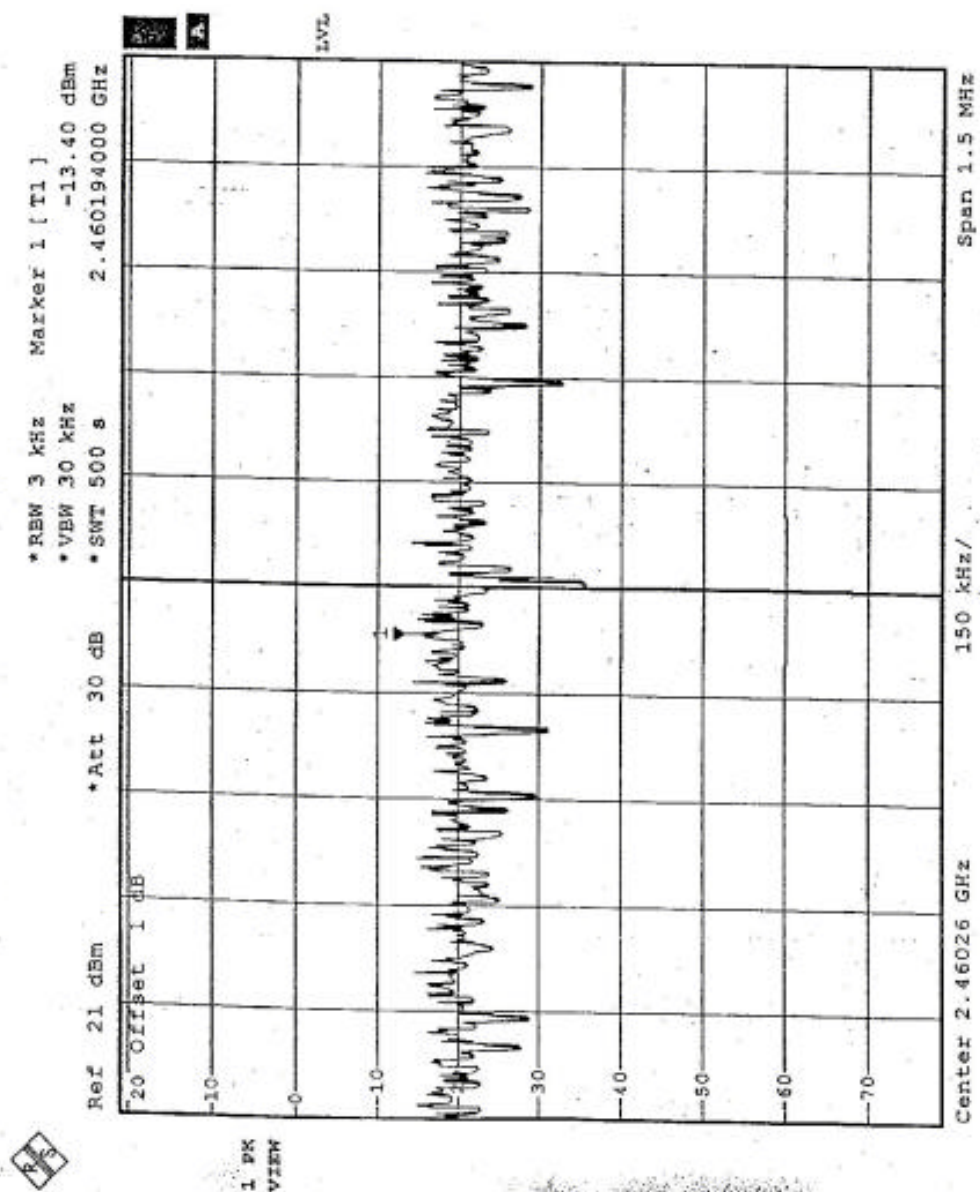

## 4.6 BAND EDGES MEASUREMENT

### 4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

### 4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP	1093.4495.30	Dec. 19, 2003

**NOTE:**

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.

### 4.6.4 EUT OPERATING CONDITION

Same as Item 4.3.5





#### 4.6.5 TEST RESULTS - DSSS

The spectrum plots are attached on the following 2 pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

**NOTE (1):** The band edge emission plot on the following first page shows 56.61dB delta between carrier maximum power and local maximum emission in restrict band (2.390GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 104.1dBuV/m, so the maximum field strength in restrict band is  $104.1 - 56.61 = 47.49$ dBuV/m which is under 54 dBuV/m limit.

**NOTE (2):** The band edge emission plot on the following second page shows 61.13 dB delta between carrier maximum power and local maximum emission in restrict band (2.4837GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 103.8dBuV/m, so the maximum field strength in restrict band is  $103.8 - 59.72 = 44.08$ dBuV/m which is under 54 dBuV/m limit.

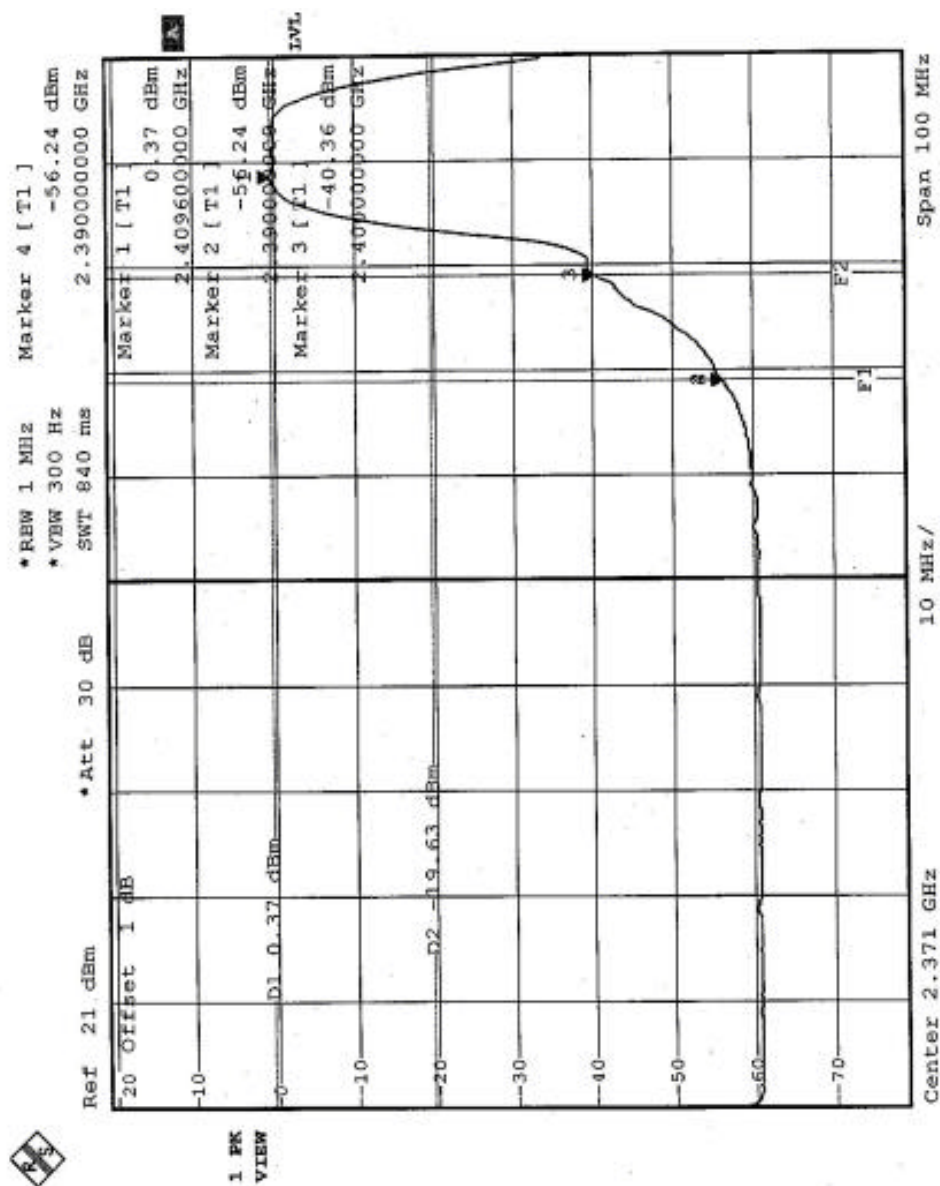

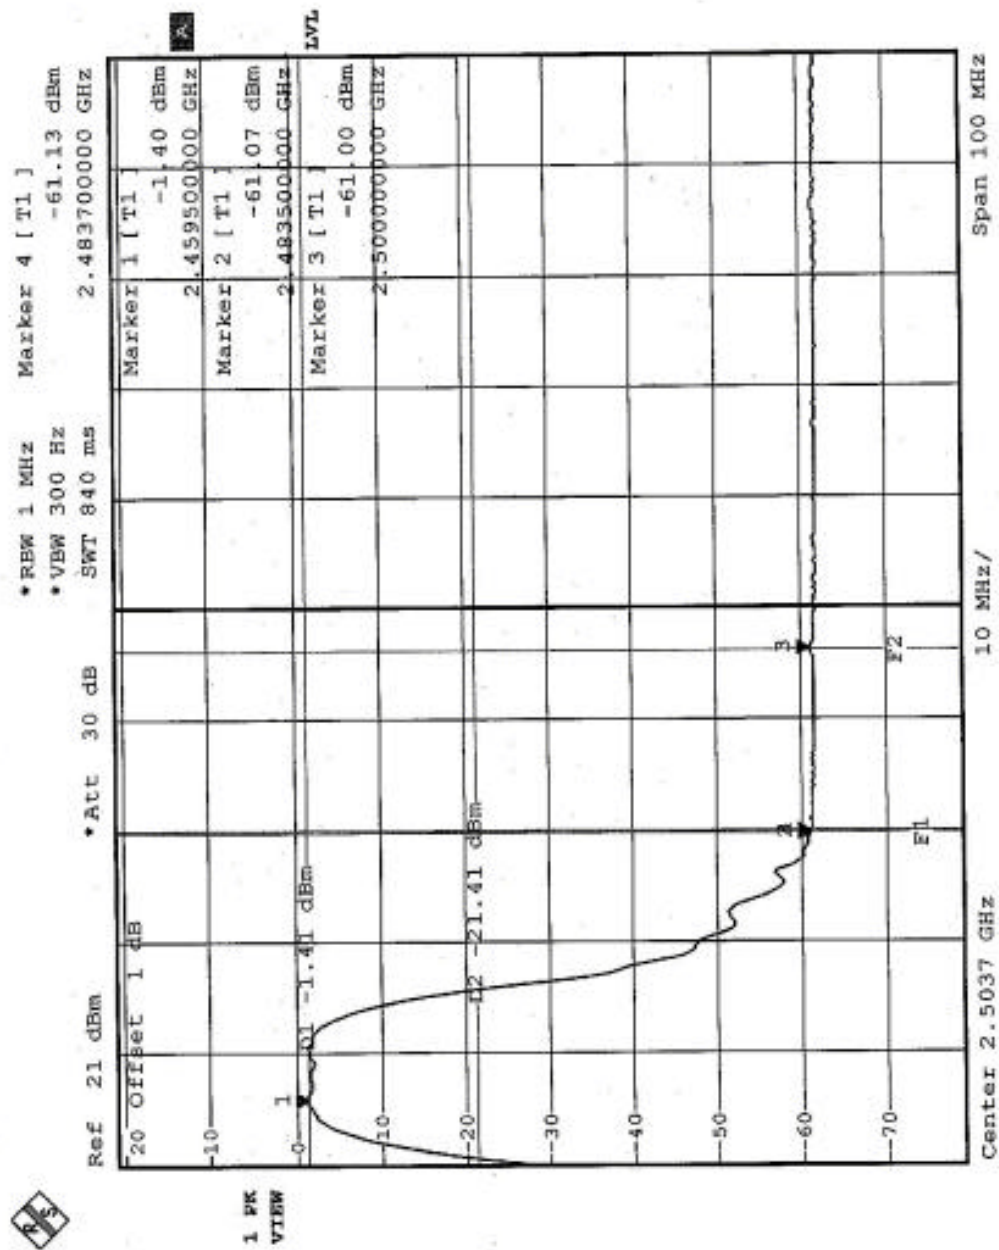


#### 4.6.6 TEST RESULTS-OFDM


The spectrum plots are attached on the following 2 pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

**NOTE (1):** The band edge emission plot on the following first page shows 47.61dB delta between carrier maximum power and local maximum emission in restrict band (2.390GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 97.7dBuV/m, so the maximum field strength in restrict band is  $97.7-47.61=50.09\text{dBuV/m}$  which is under 54 dBuV/m limit.

**NOTE (2):** The band edge emission plot on the following second page shows 47.18dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 97.1dBuV/m, so the maximum field strength in restrict band is  $97.1-47.18=49.92\text{dBuV/m}$  which is under 54 dBuV/m limit.



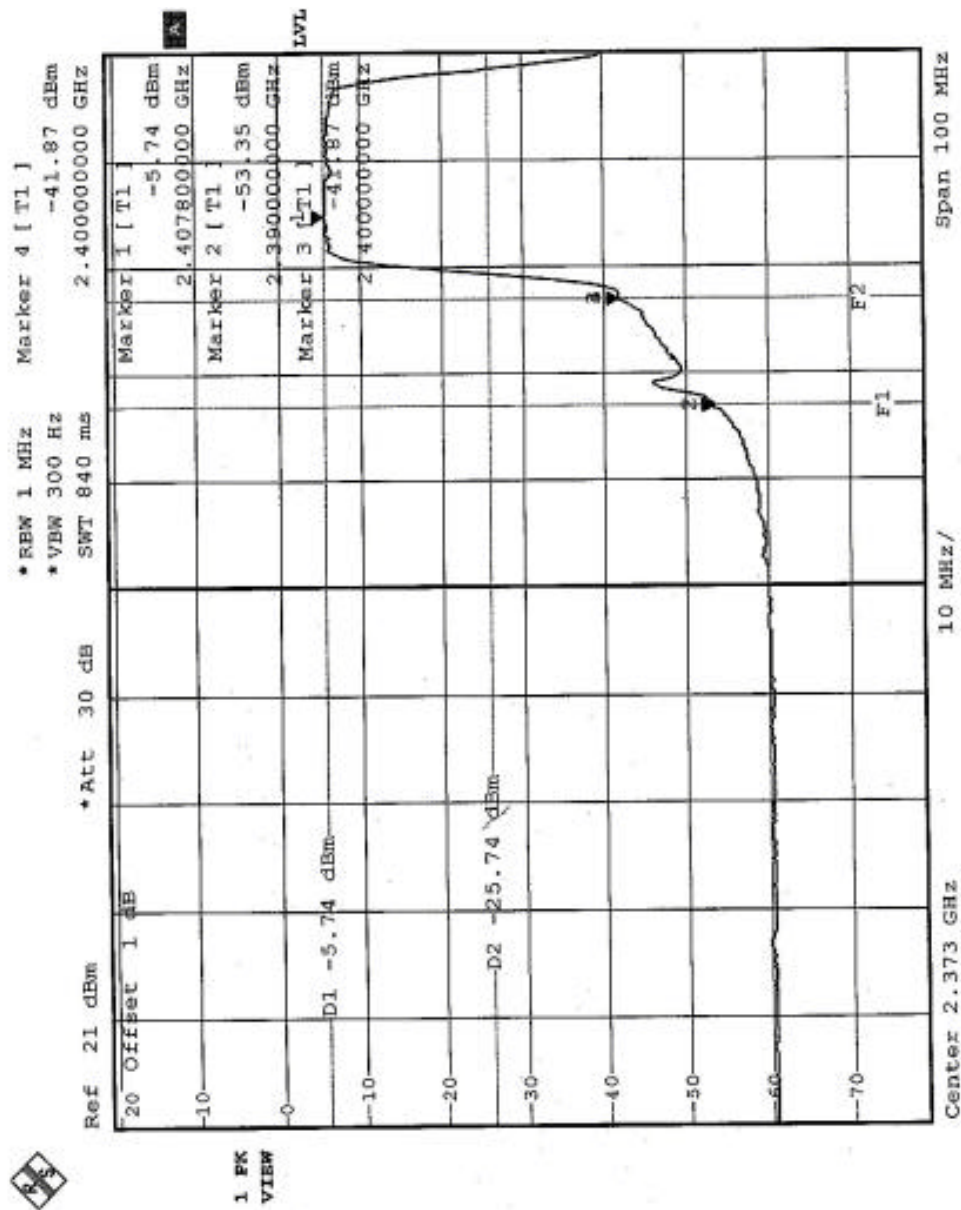

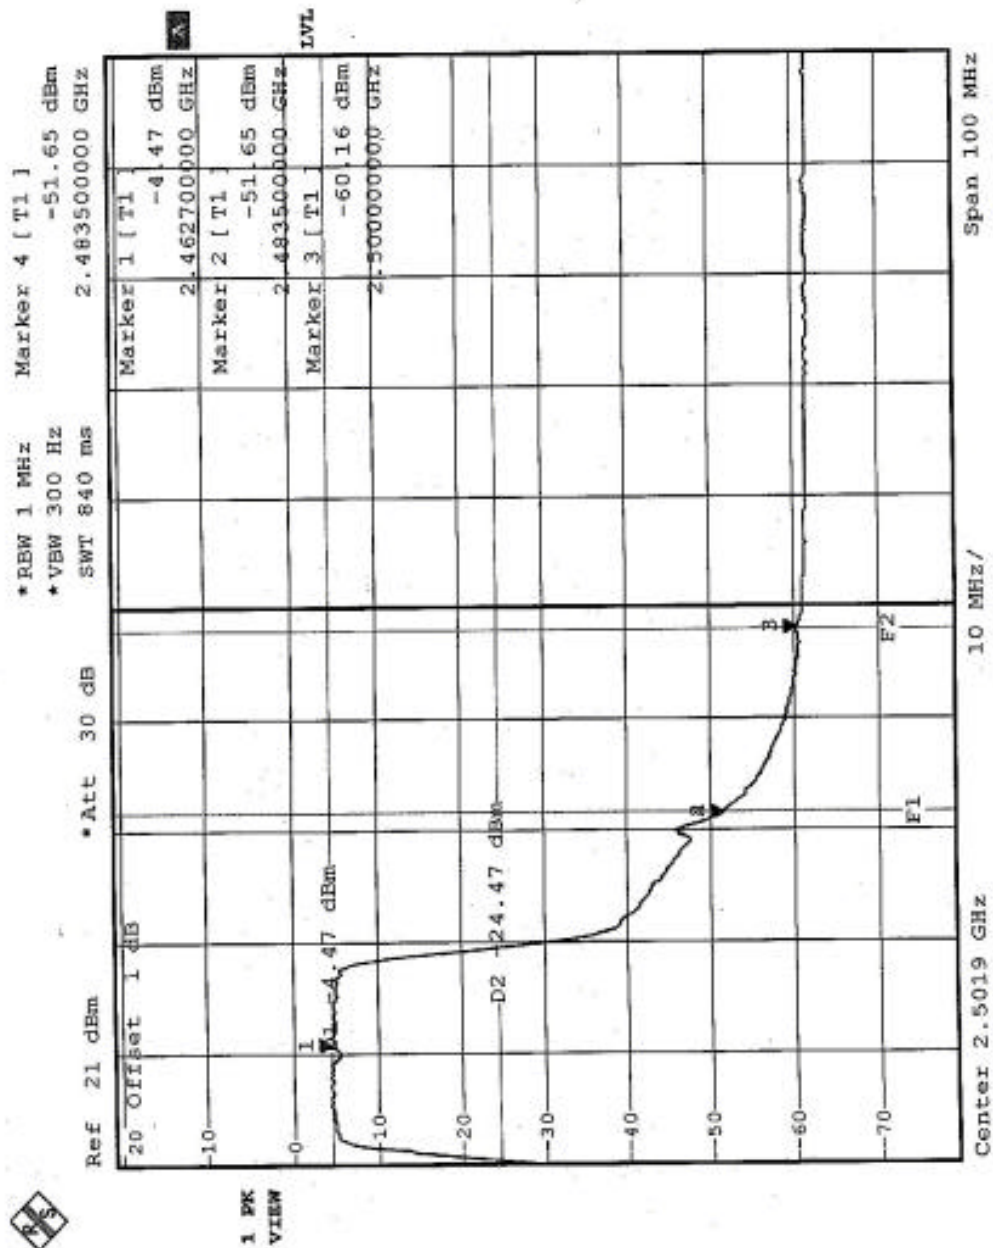



## **4.7 ANTENNA REQUIREMENT**

### **4.7.1 STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **4.7.2 ANTENNA CONNECTED CONSTRUCTION**

The antenna type used in this product is Dipole antenna, antenna 1 with TNC connector and antenna 2 with printed connector. And the maximum Gain of this antenna is only 3.3dBi.

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

### CONDUCTED EMISSION TEST

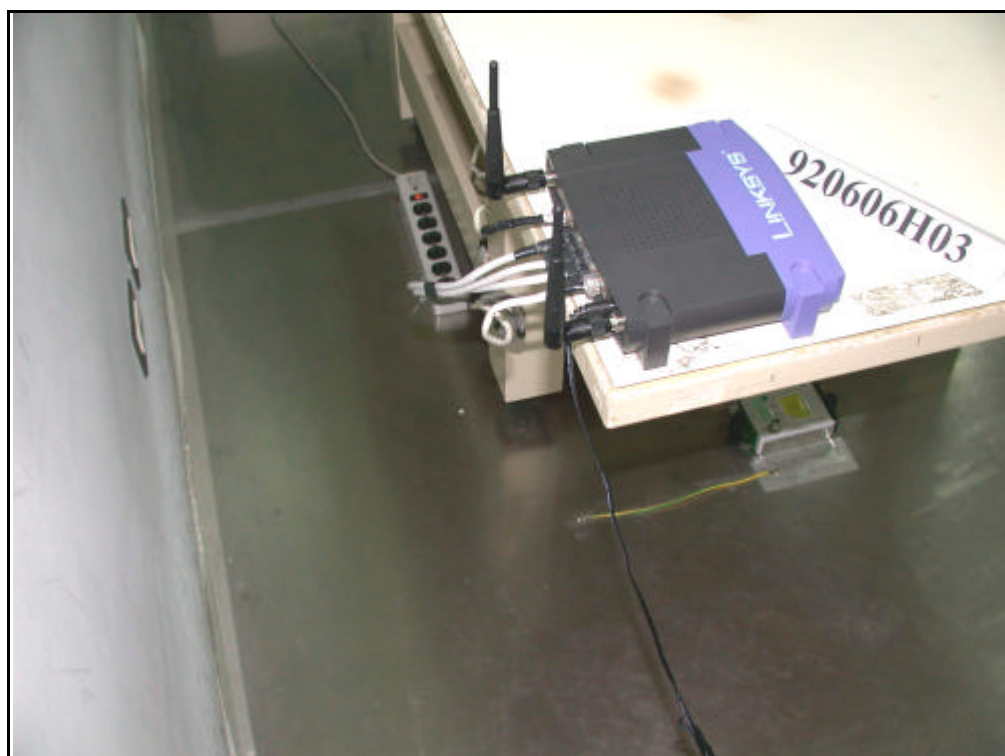

## RADIATED EMISSION TEST







## 6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

<b>USA</b>	FCC, NVLAP, UL
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>New Zealand</b>	MoC
<b>Norway</b>	NEMKO
<b>Canada</b>	INDUSTRY CANADA
<b>R.O.C.</b>	CNLA, BSMI

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

[www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml).

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC Lab:**

Tel: 886-2-26052180

Fax: 886-2-26052943

**Hsin Chu EMC Lab:**

Tel: 886-35-935343

Fax: 886-35-935342

**Lin Kou Safety Lab:**

Tel: 886-2-26093195

Fax: 886-2-26093184

**Lin Kou RF&Telecom Lab**

Tel: 886-3-3270910

Fax: 886-3-3270892

**Email:** [service@adt.com.tw](mailto:service@adt.com.tw)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.