


## Appendix B. Radiated Emission Co-location Report

## 1. Results of Radiated Emissions for Co-located


Temperature	25°C	Humidity	55%
Test Engineer	Roki Liu	Configurations	2.4GHz + 5GHz

### Horizontal

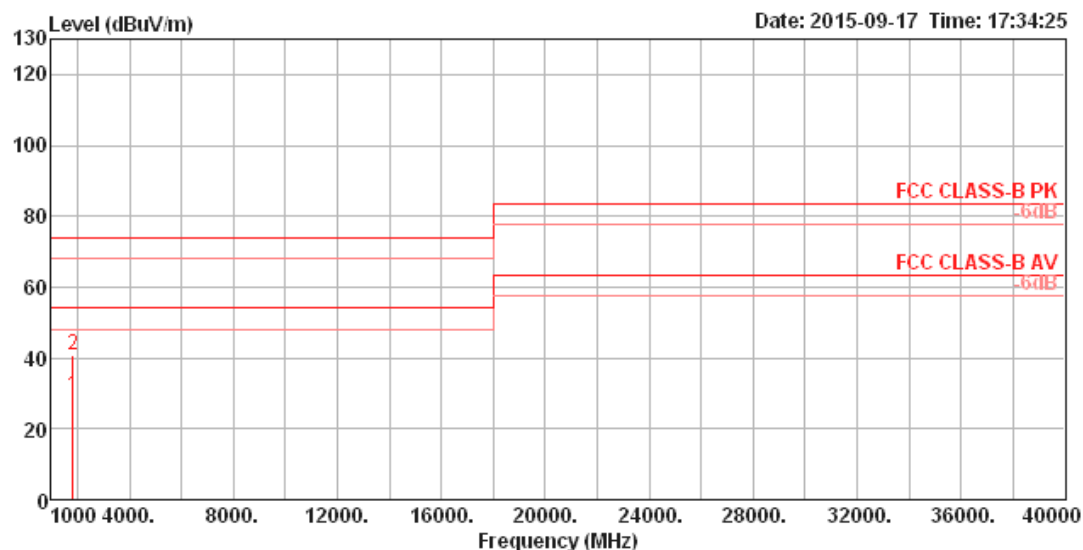

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1839.90	29.38	54.00	-24.62	33.82	3.16	27.53	35.13	100	24	HORIZONTAL Average
2	1841.22	40.62	74.00	-33.38	45.06	3.16	27.53	35.13	100	24	HORIZONTAL Peak

## Vertical

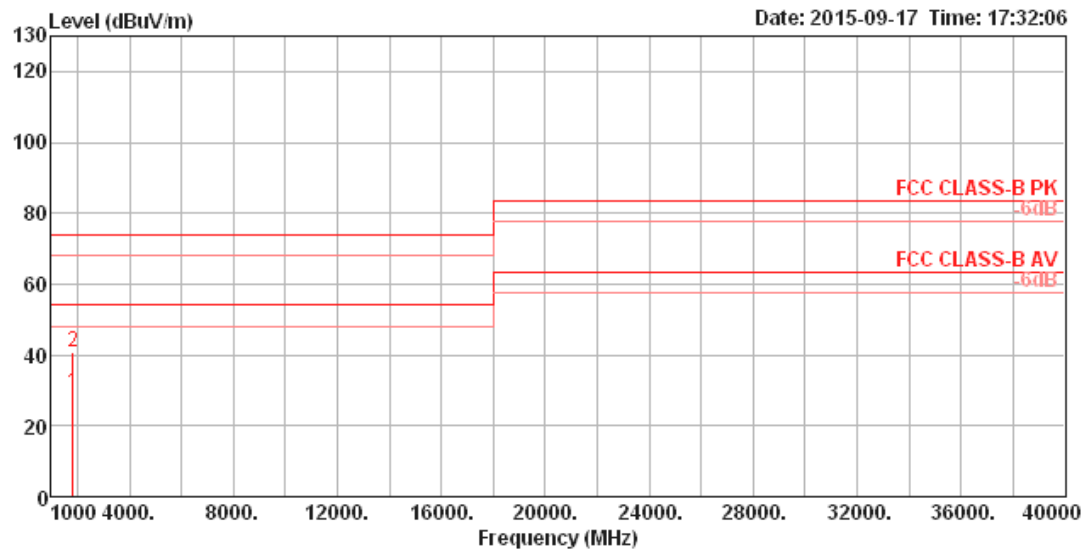

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1840.00	29.08	54.00	-24.92	33.52	3.16	27.53	35.13	179	147	VERTICAL	Average
2	1842.23	40.95	74.00	-33.05	45.39	3.16	27.53	35.13	179	147	VERTICAL	Peak