

FCC Test Report (WLAN)

Report No.: RF171204E07

FCC ID: Q87-03331

Test Model: WHW01

Series Model: VLP01, A01

Received Date: Dec. 04, 2017

Test Date: Dec. 08 to 12, 2017

Issued Date: Feb. 06, 2018

Applicant: Linksys LLC

Address: 121 Theory Drive, Irvine, CA 92617, USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT (WLAN)	7
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability and Tested Channel Detail	11
3.3 Duty Cycle of Test Signal	13
3.4 Description of Support Units	14
3.4.1 Configuration of System under Test	14
3.5 General Description of Applied Standards	15
4 Test Types and Results	16
4.1 Radiated Emission and Bandedge Measurement.....	16
4.1.1 Limits of Radiated Emission and Bandedge Measurement	16
4.1.2 Test Instruments	17
4.1.3 Test Procedures.....	19
4.1.4 Deviation from Test Standard	19
4.1.5 Test Setup.....	20
4.1.6 EUT Operating Conditions.....	21
4.1.7 Test Results	22
4.2 Conducted Emission Measurement	35
4.2.1 Limits of Conducted Emission Measurement	35
4.2.2 Test Instruments	35
4.2.3 Test Procedures.....	36
4.2.4 Deviation from Test Standard	36
4.2.5 Test Setup.....	36
4.2.6 EUT Operating Conditions.....	36
4.2.7 Test Results (Mode 1).....	37
4.2.8 Test Results (Mode 2).....	39
4.2.9 Test Results (Mode 3).....	41
4.2.10 Test Results (Mode 4).....	43
4.3 6dB Bandwidth Measurement	45
4.3.1 Limits of 6dB Bandwidth Measurement	45
4.3.2 Test Setup.....	45
4.3.3 Test Instruments	45
4.3.4 Test Procedure	45
4.3.5 Deviation from Test Standard	45
4.3.6 EUT Operating Conditions.....	45
4.3.7 Test Result.....	46
4.4 Conducted Output Power Measurement.....	48
4.4.1 Limits of Conducted Output Power Measurement	48
4.4.2 Test Setup.....	48
4.4.3 Test Instruments	48
4.4.4 Test Procedures.....	48
4.4.5 Deviation from Test Standard	48
4.4.6 EUT Operating Conditions.....	48
4.4.7 Test Results	49
4.5 Power Spectral Density Measurement.....	51
4.5.1 Limits of Power Spectral Density Measurement	51
4.5.2 Test Setup.....	51
4.5.3 Test Instruments	51

4.5.4	Test Procedure	51
4.5.5	Deviation from Test Standard	51
4.5.6	EUT Operating Condition	51
4.5.7	Test Results	52
4.6	Conducted Out of Band Emission Measurement	55
4.6.1	Limits of Conducted Out of Band Emission Measurement.....	55
4.6.2	Test Setup.....	55
4.6.3	Test Instruments	55
4.6.4	Test Procedure	55
4.6.5	Deviation from Test Standard	55
4.6.6	EUT Operating Condition	55
4.6.7	Test Results	55
5	Pictures of Test Arrangements.....	64
	Appendix – Information on the Testing Laboratories	65

Release Control Record

Issue No.	Description	Date Issued
RF171204E07	Original release.	Feb. 06, 2018

1 Certificate of Conformity

Product: Velop

Brand: Linksys

Test Model: WHW01

Series Model: VLP01, A01

Sample Status: ENGINEERING SAMPLE

Applicant: Linksys LLC

Test Date: Dec. 08 to 12, 2017

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Wendy Wu , **Date:** Feb. 06, 2018
Wendy Wu / Specialist

Approved by : May Chen , **Date:** Feb. 06, 2018
May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -3.02dB at 0.50156MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 2390.00MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex(MHF) not a standard connector.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.84 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.53 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.08 dB
	6GHz ~ 18GHz	4.98 dB
	18GHz ~ 40GHz	5.19 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT (WLAN)

Product	Velop
Brand	Linksys
Test Model	WHW01
Series Model	VLP01, A01
Status of EUT	ENGINEERING SAMPLE
Driver version	1.1.3.186486
Power Supply Rating	12Vdc from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT (20/40) mode in 2.4GHz
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.7Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.18~ 5.24GHz, 5.745 ~ 5.825GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20), VHT20: 11 802.11n (HT40), VHT40: 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 9 802.11n (HT40), 802.11ac (VHT40): 4 802.11ac (VHT80): 2
Output Power	2.4GHz: CDD Mode: 474.875mW Beamforming Mode: 331.939mW 5GHz: CDD Mode: 5.18 ~ 5.24GHz: 658.559mW 5.745 ~ 5.825GHz: 700.831mW Beamforming Mode: 5.18 ~ 5.24GHz: 658.559mW 5.745 ~ 5.825GHz: 700.831mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x 1
Data Cable Supplied	NA

Note:

1. There are WLAN and Bluetooth technology used for the EUT.
2. The EUT has below model names, which are identical to each other in all aspects except for the following table:

Brand	Model Name	Different
Linksys	WHW01	For maketing request Color : Black & White
	VLP01	
	A01	

From the above models, model: **WHW01** was selected as representative model for the test and its data was recorded in this report.

3. Simultaneously transmission condition.

Condition	Technology		
1	WLAN 2.4GHz	WLAN 5GHz	Bluetooth

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

4. The EUT must be supplied with a power adapter and following different models could be chosen as following table:

No.	Brand	Model No.	Spec.	Plug	Remark
1	APD	WA-12M12R	Input: 100-240Vac, 0.5A, 50-60Hz Output: 12V, 1A Output cable: Unshielded, 1.5m	Universal	Black & White
2	APD	WB-12G12FU	Input: 100-240Vac, 0.3A, 50-60Hz Output: 12V, 1A Output cable: Unshielded, 1.5m	FCC	Black & White
3	Ktec	KSAS0121200100D5	Input: 100-240Vac, 0.4A, 50-60Hz Output: 12V, 1A Output cable: Unshielded, 1.5m	Universal	Black & White
4	Ktec	KSA-12W-120100VU	Input: 100-240Vac, 0.4A, 50/60Hz Output: 12V, 1A Output cable: Unshielded, 1.5m	FCC	Black & White

Note: From the above models, the worst radiated emission test was found in **Adapter 4**. Therefore only the test data of the modes were recorded in this report.

5. The DDR3 Memory of EUT as following table

Item	Brand	Model No.	Different
Main source	Winbond	W632GU6MB-12	1. For maketing request. 2. DDR3 Memory.
Second source	Nanya	NT5CC128M16IP-DI	

Note: From the above models, the worst case was found in **Main source**. Therefore only the test data of the modes were recorded in this report.

6. The antennas provided to the EUT, please refer to the following table:

WLAN						
Ant No.	Brand	Model	Antenna Gain (dBi)	Frequency rang (GHz)	Antenna type	Connector type
1	ARISTOTLE	AP571-P11-P2	2.4	2.4~2.4835	PCB	i-pex(MHF)
			3.6	5.15~5.85		
2	ARISTOTLE	AP571-P22-P5	1.36	2.4~2.4835	PCB	i-pex(MHF)
			3.5	5.15~5.85		
Bluetooth						
Ant No.	Brand	Model	Antenna Gain (dBi)	Frequency rang (GHz)	Antenna type	Connector type
1	ARISTOTLE	AP571-BT-1	1.48	2.4~2.4835	PCB	i-pex(MHF)

7. The EUT incorporates a MIMO function.

2.4GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11b	1 ~ 11Mbps	2TX	2RX
802.11g	6 ~ 54Mbps	2TX	2RX
802.11n (HT20)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11n (HT40)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
VHT20	MCS0~8 Nss=1	2TX	2RX
	MCS0~8 Nss=2	2TX	2RX
VHT40	MCS0~9 Nss=1	2TX	2RX
	MCS0~9 Nss=2	2TX	2RX
5GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11a	6 ~ 54Mbps	2TX	2RX
802.11n (HT20)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11n (HT40)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11ac (VHT20)	MCS0~8 Nss=1	2TX	2RX
	MCS0~8 Nss=2	2TX	2RX
802.11ac (VHT40)	MCS0~9 Nss=1	2TX	2RX
	MCS0~9 Nss=2	2TX	2RX
802.11ac (VHT80)	MCS0~9 Nss=1	2TX	2RX
	MCS0~9 Nss=2	2TX	2RX

Note:

1. All of modulation mode support beamforming function except 802.11a/b/g modulation mode.

8. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20), VHT20:

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40), VHT40:

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
1	-	-	√	-	Power from Adapter 1
2	-	-	√	-	Power from Adapter 2
3	-	-	√	-	Power from Adapter 3
4	√	√	√	√	Power from Adapter 4

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz & Bandedge Measurement
PLC: Power Line Conducted Emission

RE<1G: Radiated Emission below 1GHz
APCM: Antenna Port Conducted Measurement

NOTE: “-” means no effect.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1	DSSS	DBPSK	1

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1	DSSS	DBPSK	1

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5
Beamforming Mode (output power only)					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE $\geq$ 1G	23deg. C, 68%RH	120Vac, 60Hz	Weiwei Lo
RE<1G	23deg. C, 68%RH	120Vac, 60Hz	Frank Chuang
PLC	25deg. C, 75%RH	120Vac, 60Hz	Andy Ho
APCM	25deg. C, 65%RH	120Vac, 60Hz	Jyunchun Lin

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.


If duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11b: Duty cycle = $12.475/12.557 = 0.993$

802.11g: Duty cycle = $2.056/2.146 = 0.958$, Duty factor = $10 * \log(1/0.958) = 0.19$

802.11n (HT20): Duty cycle = $4.955/5.058 = 0.98$

802.11n (HT40): Duty cycle = $2.405/2.495 = 0.964$, Duty factor = $10 * \log(1/0.964) = 0.16$

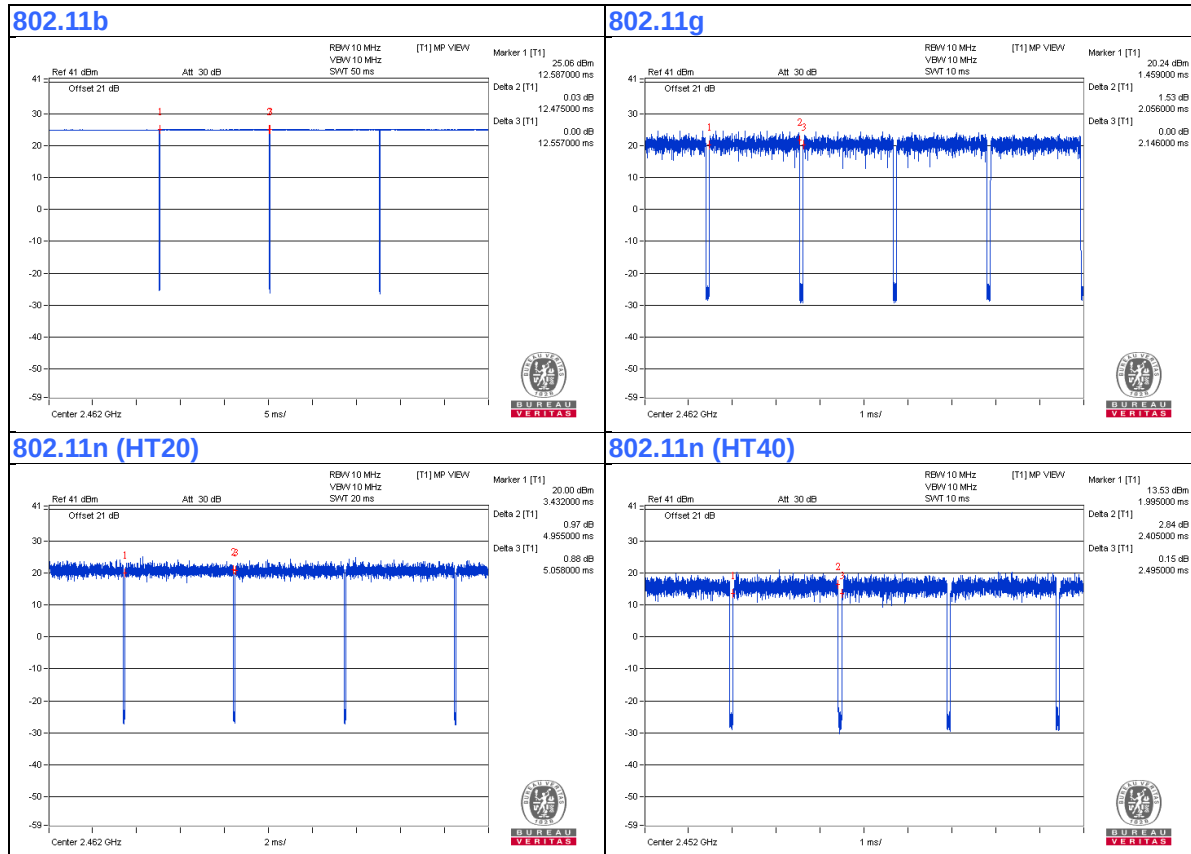

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E6420	B92T3R1	FCC DoC	Provided by Lab


Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1.5	No	0	Supplied by client
2.	RJ-45 Cable	1	10	No	0	Provided by Lab

Note: The core(s) is(are) originally attached to the cable(s).

3.4.1 Configuration of System under Test

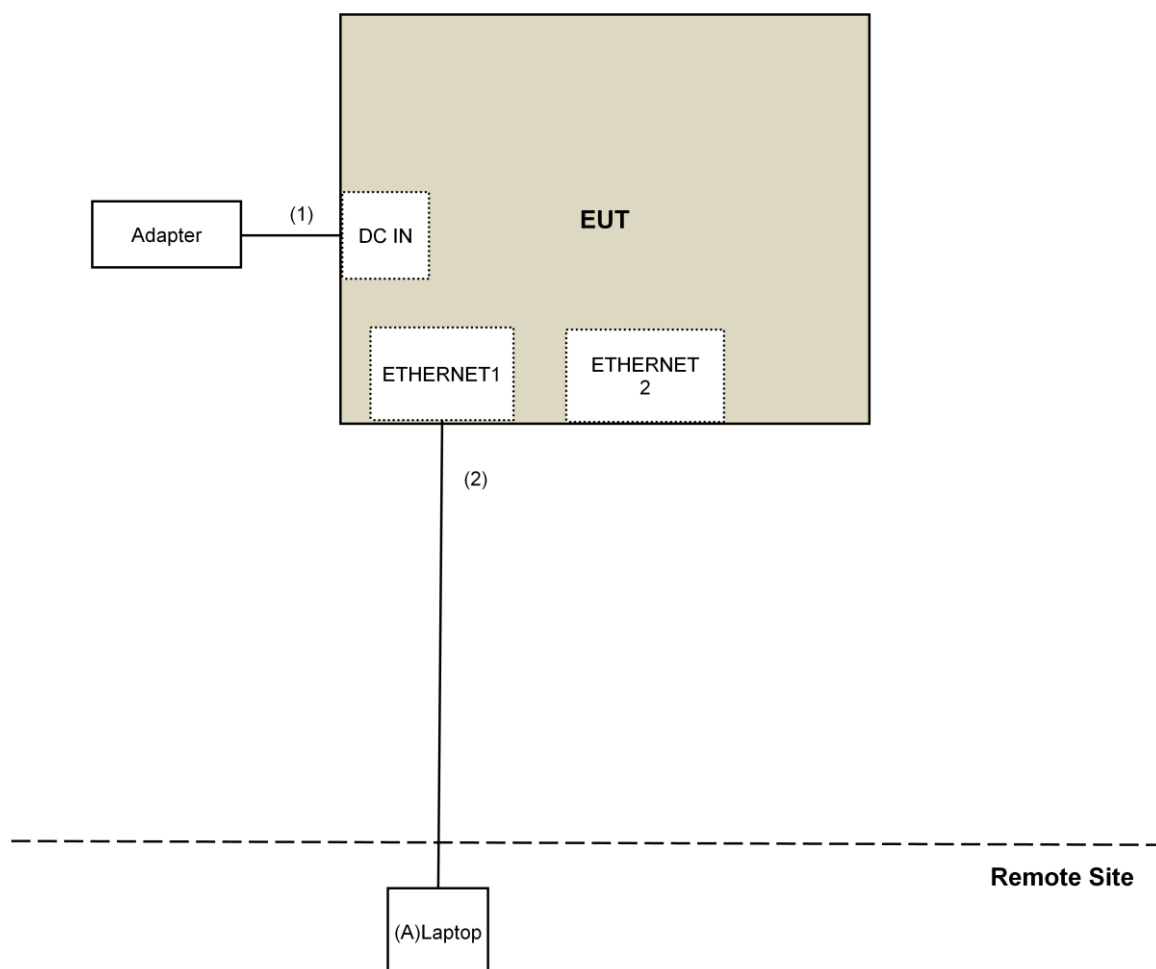

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

KDB 558074 D01 DTS Meas Guidance v04

KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY50010156	July 12, 2017	July 11, 2018
Pre-Amplifier ^(*) EMCI	EMC001340	980142	Jan. 20, 2016	Jan. 19, 2018
Loop Antenna ^(*) Electro-Metrics	EM-6879	264	Dec. 16, 2016	Dec. 15, 2018
RF Cable	NA	LOOPCAB-001 LOOPCAB-002	Jan. 17, 2017	Jan. 16, 2018
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-05	May 06, 2017	May 05, 2018
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Dec. 29, 2016	Dec. 28, 2017
RF Cable	8D	966-3-1 966-3-2 966-3-3	Apr. 01, 2017	Mar. 31, 2018
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-3-01	Oct. 03, 2017	Oct. 02, 2018
Horn_Antenna SCHWARZBECK	BBHA9120-D	9120D-406	Dec. 28, 2016	Dec. 27, 2017
Pre-Amplifier EMCI	EMC12630SE	980384	Feb. 02, 2017	Feb. 01, 2018
RF Cable	EMC104-SM-SM-1200 EMC104-SM-SM-2000 EMC104-SM-SM-5000	160922 150317 150322	Feb. 02, 2017 Mar. 29, 2017 Mar. 29, 2017	Feb. 01, 2018 Mar. 28, 2018 Mar. 28, 2018
Spectrum Analyzer Keysight	N9030A	MY54490679	July 25, 2017	July 24, 2018
Pre-Amplifier EMCI	EMC184045SE	980386	Feb. 02, 2017	Feb. 01, 2018
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170608	Dec. 15, 2016	Dec. 14, 2017
RF Cable	SUCOFLEX 102	36432/2 36433/2	Jan. 15, 2017	Jan. 14, 2018
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Spectrum Analyzer R&S	FSv40	100964	July 1, 2017	June 30, 2018
Power meter Anritsu	ML2495A	1014008	May 11, 2017	May 10, 2018
Power sensor Anritsu	MA2411B	0917122	May 11, 2017	May 10, 2018

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 3.
4. The CANADA Site Registration No. is 20331-1
5. Loop antenna was used for all emissions below 30 MHz.
6. Tested Date: Dec. 08 to 12, 2017

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

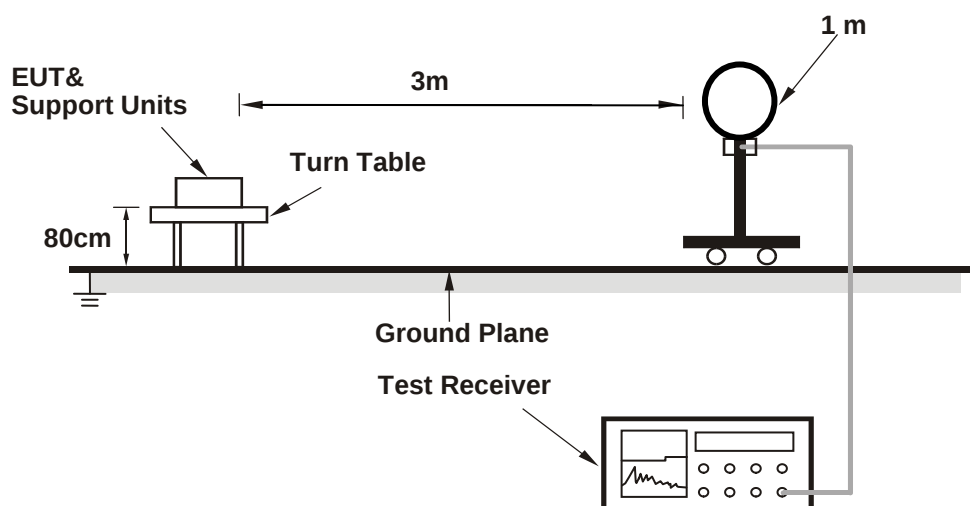

For Radiated emission 30MHz to 1GHz

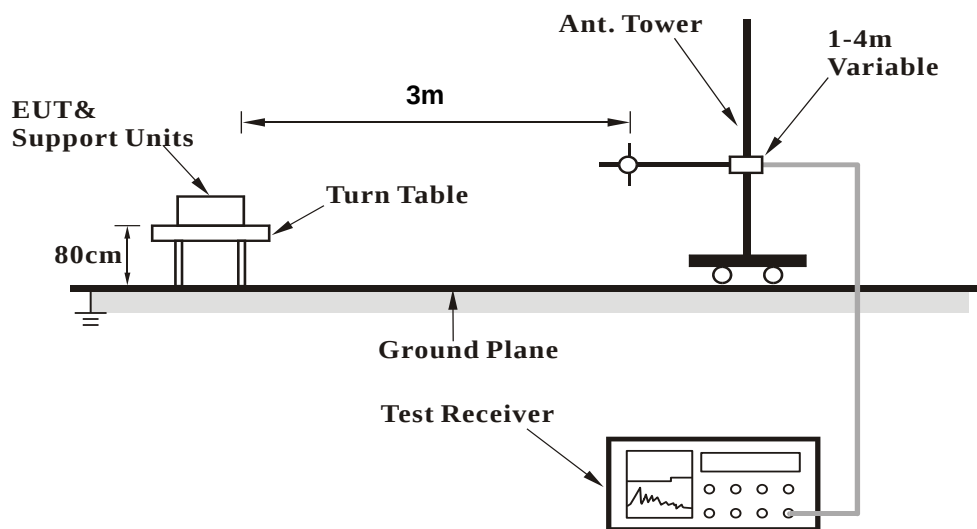

For Radiated emission above 1GHz

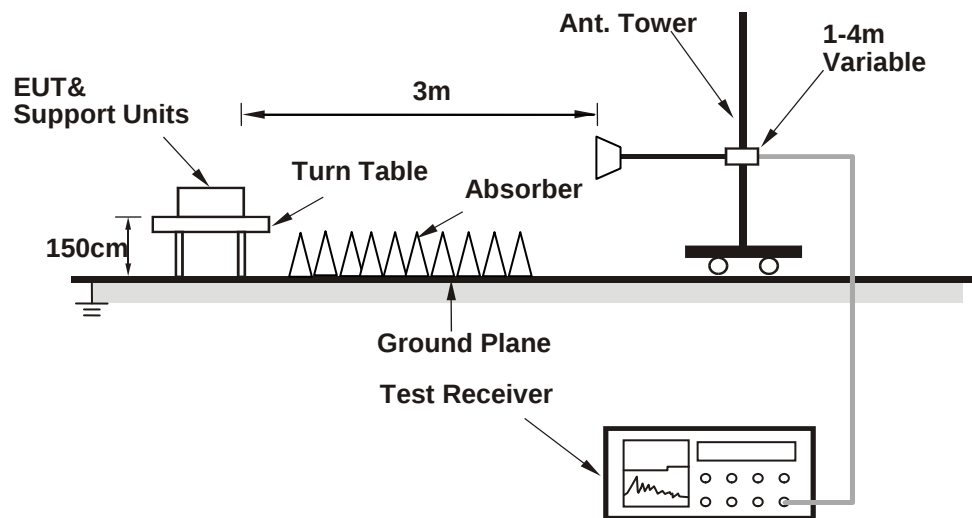

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Connected the EUT with the Laptop which is placed on remote site.
- Controlling software (QARCT.exe V3.0.210.0) has been activated to set the EUT on specific status.

4.1.7 Test Results

Above 1GHz Data:

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	41.5 PK	74.0	-32.5	2.72 H	193	43.1	-1.6
2	2390.00	34.4 AV	54.0	-19.6	2.72 H	193	36.0	-1.6
3	*2412.00	114.3 PK			2.72 H	193	115.8	-1.5
4	*2412.00	112.0 AV			2.72 H	193	113.5	-1.5
5	4824.00	44.0 PK	74.0	-30.0	1.40 H	215	41.0	3.0
6	4824.00	40.9 AV	54.0	-13.1	1.40 H	215	37.9	3.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.2 PK	74.0	-13.8	2.47 V	70	61.8	-1.6
2	2390.00	53.9 AV	54.0	-0.1	2.47 V	70	55.5	-1.6
3	*2412.00	116.2 PK			2.47 V	70	117.7	-1.5
4	*2412.00	113.7 AV			2.47 V	70	115.2	-1.5
5	4824.00	43.7 PK	74.0	-30.3	1.80 V	178	40.7	3.0
6	4824.00	39.5 AV	54.0	-14.5	1.80 V	178	36.5	3.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	41.7 PK	74.0	-32.3	2.78 H	205	43.3	-1.6
2	2390.00	34.7 AV	54.0	-19.3	2.78 H	205	36.3	-1.6
3	*2437.00	114.4 PK			1.19 H	50	115.9	-1.5
4	*2437.00	112.1 AV			1.19 H	50	113.6	-1.5
5	2496.00	41.0 PK	74.0	-33.0	1.22 H	167	42.3	-1.3
6	2496.00	37.0 AV	54.0	-17.0	1.22 H	167	38.3	-1.3
7	4874.00	43.9 PK	74.0	-30.1	1.46 H	231	40.7	3.2
8	4874.00	41.0 AV	54.0	-13.0	1.46 H	231	37.8	3.2
9	7311.00	43.2 PK	74.0	-30.8	1.56 H	322	34.3	8.9
10	7311.00	30.6 AV	54.0	-23.4	1.56 H	322	21.7	8.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.3 PK	74.0	-15.7	2.54 V	33	59.9	-1.6
2	2390.00	49.3 AV	54.0	-4.7	2.54 V	33	50.9	-1.6
3	*2437.00	116.5 PK			2.54 V	33	118.0	-1.5
4	*2437.00	113.8 AV			2.54 V	33	115.3	-1.5
5	2496.00	57.7 PK	74.0	-16.3	2.54 V	33	59.0	-1.3
6	2496.00	46.3 AV	54.0	-7.7	2.54 V	33	47.6	-1.3
7	4874.00	43.3 PK	74.0	-30.7	1.82 V	166	40.1	3.2
8	4874.00	39.1 AV	54.0	-14.9	1.82 V	166	35.9	3.2
9	7311.00	43.5 PK	74.0	-30.5	1.36 V	184	34.6	8.9
10	7311.00	32.0 AV	54.0	-22.0	1.36 V	184	23.1	8.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	113.9 PK			1.22 H	57	115.3	-1.4
2	*2462.00	111.6 AV			1.22 H	57	113.0	-1.4
3	2495.90	57.9 PK	74.0	-16.1	1.22 H	57	59.2	-1.3
4	2495.90	47.5 AV	54.0	-6.5	1.22 H	57	48.8	-1.3
5	2843.80	41.7 PK	74.0	-32.3	2.75 H	195	42.3	-0.6
6	2843.80	34.7 AV	54.0	-19.3	2.75 H	195	35.3	-0.6
7	4924.00	44.4 PK	74.0	-29.6	1.45 H	222	41.1	3.3
8	4924.00	41.4 AV	54.0	-12.6	1.45 H	222	38.1	3.3
9	7386.00	43.4 PK	74.0	-30.6	1.55 H	317	34.3	9.1
10	7386.00	30.9 AV	54.0	-23.1	1.55 H	317	21.8	9.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	116.1 PK			1.56 V	24	117.5	-1.4
2	*2462.00	113.7 AV			1.56 V	24	115.1	-1.4
3	2495.90	61.9 PK	74.0	-12.1	1.56 V	24	63.2	-1.3
4	2495.90	49.2 AV	54.0	-4.8	1.56 V	24	50.5	-1.3
5	2843.80	42.3 PK	74.0	-31.7	3.00 V	8	42.9	-0.6
6	2843.80	37.4 AV	54.0	-16.6	3.00 V	8	38.0	-0.6
7	4924.00	43.0 PK	74.0	-31.0	1.86 V	154	39.7	3.3
8	4924.00	38.8 AV	54.0	-15.2	1.86 V	154	35.5	3.3
9	7386.00	44.2 PK	74.0	-29.8	1.41 V	181	35.1	9.1
10	7386.00	32.5 AV	54.0	-21.5	1.41 V	181	23.4	9.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.9 PK	74.0	-12.1	1.62 H	34	63.5	-1.6
2	2390.00	49.2 AV	54.0	-4.8	1.62 H	34	50.8	-1.6
3	*2412.00	113.1 PK			1.62 H	34	114.6	-1.5
4	*2412.00	101.3 AV			1.62 H	34	102.8	-1.5
5	4824.00	49.4 PK	74.0	-24.6	2.51 H	202	46.4	3.0
6	4824.00	44.4 AV	54.0	-9.6	2.51 H	202	41.4	3.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.9 PK	74.0	-4.1	2.58 V	49	71.5	-1.6
2	2390.00	53.9 AV	54.0	-0.1	2.58 V	49	55.5	-1.6
3	*2412.00	116.2 PK			2.58 V	49	117.7	-1.5
4	*2412.00	103.4 AV			2.58 V	49	104.9	-1.5
5	4824.00	48.5 PK	74.0	-25.5	2.30 V	68	45.5	3.0
6	4824.00	43.1 AV	54.0	-10.9	2.30 V	68	40.1	3.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.6 PK	74.0	-11.4	1.57 H	36	64.2	-1.6
2	2390.00	49.6 AV	54.0	-4.4	1.57 H	36	51.2	-1.6
3	*2437.00	116.3 PK			1.57 H	36	117.8	-1.5
4	*2437.00	105.6 AV			1.57 H	36	107.1	-1.5
5	2483.50	42.5 PK	74.0	-31.5	1.57 H	36	43.9	-1.4
6	2483.50	37.5 AV	54.0	-16.5	1.57 H	36	38.9	-1.4
7	4874.00	49.0 PK	74.0	-25.0	2.50 H	193	45.8	3.2
8	4874.00	44.3 AV	54.0	-9.7	2.50 H	193	41.1	3.2
9	7311.00	43.5 PK	74.0	-30.5	1.71 H	44	34.6	8.9
10	7311.00	32.9 AV	54.0	-21.1	1.71 H	44	24.0	8.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.4 PK	74.0	-6.6	2.45 V	28	69.0	-1.6
2	2390.00	53.9 AV	54.0	-0.1	2.45 V	28	55.5	-1.6
3	*2437.00	119.5 PK			2.45 V	28	121.0	-1.5
4	*2437.00	107.0 AV			2.45 V	28	108.5	-1.5
5	2483.50	68.8 PK	74.0	-5.2	2.45 V	28	70.2	-1.4
6	2483.50	53.4 AV	54.0	-0.6	2.45 V	28	54.8	-1.4
7	4874.00	48.9 PK	74.0	-25.1	2.24 V	56	45.7	3.2
8	4874.00	43.5 AV	54.0	-10.5	2.24 V	56	40.3	3.2
9	7311.00	43.4 PK	74.0	-30.6	1.64 V	360	34.5	8.9
10	7311.00	32.7 AV	54.0	-21.3	1.64 V	360	23.8	8.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	113.5 PK			1.56 H	35	114.9	-1.4
2	*2462.00	101.6 AV			1.56 H	35	103.0	-1.4
3	2483.50	62.4 PK	74.0	-11.6	1.56 H	35	63.8	-1.4
4	2483.50	49.6 AV	54.0	-4.4	1.56 H	35	51.0	-1.4
5	4924.00	49.4 PK	74.0	-24.6	2.45 H	207	46.1	3.3
6	4924.00	44.7 AV	54.0	-9.3	2.45 H	207	41.4	3.3
7	7386.00	43.7 PK	74.0	-30.3	1.66 H	28	34.6	9.1
8	7386.00	33.3 AV	54.0	-20.7	1.66 H	28	24.2	9.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	115.6 PK			1.98 V	39	117.0	-1.4
2	*2462.00	103.0 AV			1.98 V	39	104.4	-1.4
3	2483.50	73.6 PK	74.0	-0.4	1.98 V	39	75.0	-1.4
4	2483.50	51.4 AV	54.0	-2.6	1.98 V	39	52.8	-1.4
5	4924.00	49.5 PK	74.0	-24.5	2.26 V	54	46.2	3.3
6	4924.00	43.9 AV	54.0	-10.1	2.26 V	54	40.6	3.3
7	7386.00	43.0 PK	74.0	-31.0	1.63 V	360	33.9	9.1
8	7386.00	32.5 AV	54.0	-21.5	1.63 V	360	23.4	9.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.3 PK	74.0	-11.7	1.55 H	35	63.9	-1.6
2	2390.00	49.4 AV	54.0	-4.6	1.55 H	35	51.0	-1.6
3	*2412.00	112.4 PK			1.55 H	35	113.9	-1.5
4	*2412.00	100.6 AV			1.55 H	35	102.1	-1.5
5	4824.00	49.8 PK	74.0	-24.2	2.46 H	206	46.8	3.0
6	4824.00	44.8 AV	54.0	-9.2	2.46 H	206	41.8	3.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.9 PK	74.0	-4.1	2.55 V	55	71.5	-1.6
2	2390.00	53.8 AV	54.0	-0.2	2.55 V	55	55.4	-1.6
3	*2412.00	114.2 PK			2.55 V	41	115.7	-1.5
4	*2412.00	102.3 AV			2.55 V	41	103.8	-1.5
5	4824.00	48.3 PK	74.0	-25.7	2.25 V	64	45.3	3.0
6	4824.00	42.7 AV	54.0	-11.3	2.25 V	64	39.7	3.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.4 PK	74.0	-11.6	1.54 H	34	64.0	-1.6
2	2390.00	49.6 AV	54.0	-4.4	1.54 H	34	51.2	-1.6
3	*2437.00	114.3 PK			1.59 H	39	115.8	-1.5
4	*2437.00	104.3 AV			1.59 H	39	105.8	-1.5
5	2483.50	43.0 PK	74.0	-31.0	1.56 H	48	44.4	-1.4
6	2483.50	37.8 AV	54.0	-16.2	1.56 H	48	39.2	-1.4
7	4874.00	49.5 PK	74.0	-24.5	2.48 H	186	46.3	3.2
8	4874.00	44.7 AV	54.0	-9.3	2.48 H	186	41.5	3.2
9	7311.00	42.8 PK	74.0	-31.2	1.73 H	55	33.9	8.9
10	7311.00	32.5 AV	54.0	-21.5	1.73 H	55	23.6	8.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.5 PK	74.0	-5.5	2.43 V	28	70.1	-1.6
2	2390.00	53.9 AV	54.0	-0.1	2.43 V	28	55.5	-1.6
3	*2437.00	118.6 PK			2.45 V	29	120.1	-1.5
4	*2437.00	106.8 AV			2.45 V	29	108.3	-1.5
5	2483.50	69.3 PK	74.0	-4.7	2.39 V	18	70.7	-1.4
6	2483.50	53.4 AV	54.0	-0.6	2.39 V	18	54.8	-1.4
7	4874.00	49.2 PK	74.0	-24.8	2.20 V	65	46.0	3.2
8	4874.00	43.6 AV	54.0	-10.4	2.20 V	65	40.4	3.2
9	7311.00	43.2 PK	74.0	-30.8	1.68 V	360	34.3	8.9
10	7311.00	32.7 AV	54.0	-21.3	1.68 V	360	23.8	8.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	112.2 PK			1.61 H	30	113.6	-1.4
2	*2462.00	100.3 AV			1.61 H	30	101.7	-1.4
3	2483.50	62.1 PK	74.0	-11.9	1.51 H	39	63.5	-1.4
4	2483.50	49.4 AV	54.0	-4.6	1.51 H	39	50.8	-1.4
5	4924.00	49.0 PK	74.0	-25.0	2.51 H	202	45.7	3.3
6	4924.00	44.5 AV	54.0	-9.5	2.51 H	202	41.2	3.3
7	7386.00	43.3 PK	74.0	-30.7	1.67 H	25	34.2	9.1
8	7386.00	33.2 AV	54.0	-20.8	1.67 H	25	24.1	9.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	114.7 PK			1.92 V	54	116.1	-1.4
2	*2462.00	102.5 AV			1.92 V	54	103.9	-1.4
3	2483.50	73.8 PK	74.0	-0.2	1.97 V	45	75.2	-1.4
4	2483.50	51.2 AV	54.0	-2.8	1.97 V	45	52.6	-1.4
5	4924.00	49.1 PK	74.0	-24.9	2.21 V	62	45.8	3.3
6	4924.00	43.6 AV	54.0	-10.4	2.21 V	62	40.3	3.3
7	7386.00	42.9 PK	74.0	-31.1	1.69 V	360	33.8	9.1
8	7386.00	32.4 AV	54.0	-21.6	1.69 V	360	23.3	9.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.3 PK	74.0	-12.7	1.64 H	18	62.9	-1.6
2	2390.00	49.2 AV	54.0	-4.8	1.64 H	18	50.8	-1.6
3	*2422.00	110.5 PK			1.64 H	18	112.1	-1.6
4	*2422.00	98.5 AV			1.64 H	18	100.1	-1.6
5	4844.00	49.0 PK	74.0	-25.0	2.20 H	38	45.9	3.1
6	4844.00	43.3 AV	54.0	-10.7	2.20 H	38	40.2	3.1
7	7266.00	42.9 PK	74.0	-31.1	1.62 H	360	34.0	8.9
8	7266.00	32.3 AV	54.0	-21.7	1.62 H	360	23.4	8.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.9 PK	74.0	-8.1	2.53 V	51	67.5	-1.6
2	2390.00	53.8 AV	54.0	-0.2	2.53 V	51	55.4	-1.6
3	*2422.00	111.1 PK			2.53 V	51	112.7	-1.6
4	*2422.00	101.3 AV			2.53 V	51	102.9	-1.6
5	4844.00	42.7 PK	74.0	-31.3	1.65 V	360	39.6	3.1
6	4844.00	32.5 AV	54.0	-21.5	1.65 V	360	29.4	3.1
7	7266.00	44.2 PK	74.0	-29.8	1.67 V	225	35.3	8.9
8	7266.00	33.5 AV	54.0	-20.5	1.67 V	225	24.6	8.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.3 PK	74.0	-12.7	1.50 H	55	62.9	-1.6
2	2390.00	49.5 AV	54.0	-4.5	1.50 H	55	51.1	-1.6
3	*2437.00	113.1 PK			1.50 H	55	114.6	-1.5
4	*2437.00	102.9 AV			1.50 H	55	104.4	-1.5
5	2496.00	43.1 PK	74.0	-30.9	1.50 H	55	44.4	-1.3
6	2496.00	38.2 AV	54.0	-15.8	1.50 H	55	39.5	-1.3
7	4874.00	49.1 PK	74.0	-24.9	2.29 H	60	45.9	3.2
8	4874.00	43.5 AV	54.0	-10.5	2.29 H	60	40.3	3.2
9	7311.00	42.9 PK	74.0	-31.1	1.64 H	360	34.0	8.9
10	7311.00	32.2 AV	54.0	-21.8	1.64 H	360	23.3	8.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.8 PK	74.0	-8.2	2.02 V	50	67.4	-1.6
2	2390.00	53.9 AV	54.0	-0.1	2.02 V	50	55.5	-1.6
3	*2437.00	112.4 PK			2.02 V	50	113.9	-1.5
4	*2437.00	102.6 AV			2.02 V	50	104.1	-1.5
5	2496.00	63.9 PK	74.0	-10.1	2.02 V	50	65.2	-1.3
6	2496.00	49.1 AV	54.0	-4.9	2.02 V	50	50.4	-1.3
7	4874.00	43.3 PK	74.0	-30.7	1.60 V	347	40.1	3.2
8	4874.00	33.2 AV	54.0	-20.8	1.60 V	347	30.0	3.2
9	7311.00	44.7 PK	74.0	-29.3	1.64 V	237	35.8	8.9
10	7311.00	33.9 AV	54.0	-20.1	1.64 V	237	25.0	8.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	110.6 PK			1.56 H	55	112.1	-1.5
2	*2452.00	98.6 AV			1.56 H	55	100.1	-1.5
3	2483.50	62.0 PK	74.0	-12.0	1.56 H	55	63.4	-1.4
4	2483.50	49.2 AV	54.0	-4.8	1.56 H	55	50.6	-1.4
5	4904.00	49.8 PK	74.0	-24.2	2.46 H	217	46.6	3.2
6	4904.00	45.0 AV	54.0	-9.0	2.46 H	217	41.8	3.2
7	7356.00	42.7 PK	74.0	-31.3	1.66 H	16	33.6	9.1
8	7356.00	32.8 AV	54.0	-21.2	1.66 H	16	23.7	9.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	111.4 PK			2.35 V	52	112.9	-1.5
2	*2452.00	100.5 AV			2.35 V	52	102.0	-1.5
3	2483.50	70.4 PK	74.0	-3.6	2.35 V	52	71.8	-1.4
4	2483.50	53.8 AV	54.0	-0.2	2.35 V	52	55.2	-1.4
5	4904.00	43.5 PK	74.0	-30.5	1.66 V	353	40.3	3.2
6	4904.00	33.1 AV	54.0	-20.9	1.66 V	353	29.9	3.2
7	7356.00	44.3 PK	74.0	-29.7	1.62 V	228	35.2	9.1
8	7356.00	33.4 AV	54.0	-20.6	1.62 V	228	24.3	9.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz Data:

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	125.01	35.6 QP	43.5	-7.9	1.50 H	78	45.3	-9.7
2	143.32	30.7 QP	43.5	-12.8	2.00 H	87	39.0	-8.3
3	193.83	24.1 QP	43.5	-19.4	1.00 H	245	35.2	-11.1
4	250.02	29.0 QP	46.0	-17.0	1.50 H	61	38.5	-9.5
5	356.82	32.0 QP	46.0	-14.0	1.00 H	56	38.4	-6.4
6	689.72	30.2 QP	46.0	-15.8	1.00 H	134	29.9	0.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	47.81	35.0 QP	40.0	-5.0	1.00 V	118	43.1	-8.1
2	106.70	34.5 QP	43.5	-9.0	1.00 V	337	45.9	-11.4
3	125.01	39.6 QP	43.5	-3.9	1.00 V	250	49.3	-9.7
4	250.00	28.7 QP	46.0	-17.3	1.00 V	101	38.2	-9.5
5	356.60	31.7 QP	46.0	-14.3	1.50 V	127	38.1	-6.4
6	693.41	30.7 QP	46.0	-15.3	1.00 V	52	30.3	0.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Nov. 01, 2017	Oct. 31, 2018
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Nov. 15, 2017	Nov. 14, 2018
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100072	June 03, 2017	June 02, 2018
50 ohms Terminator	N/A	EMC-02	Sep. 22, 2017	Sep. 21, 2018
RF Cable	5D-FB	COCCAB-001	Sep. 29, 2017	Sep. 28, 2018
10 dB PAD Mini-Circuits	HAT-10+	CONATT-004	June 18, 2017	June 17, 2018
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. 1.
3. Tested Date: Dec. 12, 2017

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

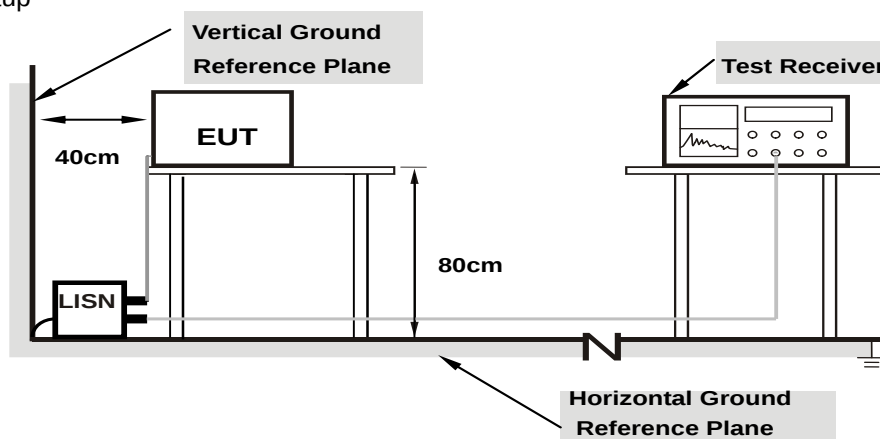

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results (Mode 1)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.09	38.57	31.30	48.66	41.39	66.00	56.00	-17.34	-14.61
2	0.18516	10.07	34.89	22.57	44.96	32.64	64.25	54.25	-19.29	-21.61
3	0.26328	10.09	31.75	22.43	41.84	32.52	61.33	51.33	-19.49	-18.81
4	0.28672	10.09	31.28	21.15	41.37	31.24	60.62	50.62	-19.25	-19.38
5	0.40391	10.12	34.01	24.41	44.13	34.53	57.77	47.77	-13.64	-13.24
6	0.75547	10.15	19.61	9.51	29.76	19.66	56.00	46.00	-26.24	-26.34
7	4.96875	10.43	26.31	17.84	36.74	28.27	56.00	46.00	-19.26	-17.73

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

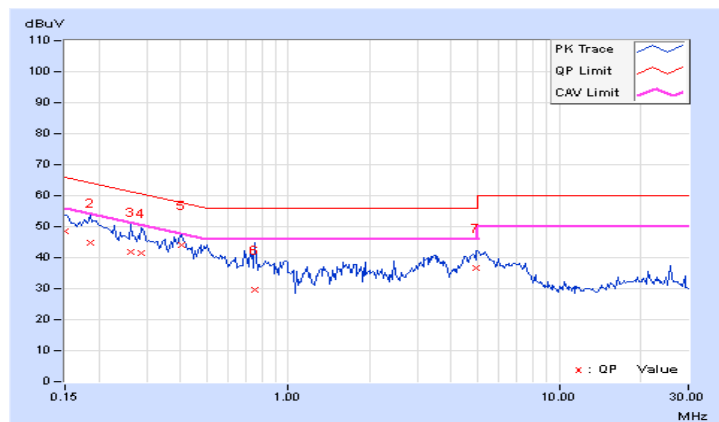


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18125	10.05	34.62	22.66	44.67	32.71	64.43	54.43	-19.76	-21.72
2	0.21641	10.05	34.43	20.68	44.48	30.73	62.96	52.96	-18.48	-22.23
3	0.25547	10.06	30.80	18.65	40.86	28.71	61.58	51.58	-20.72	-22.87
4	0.32969	10.09	27.95	13.43	38.04	23.52	59.46	49.46	-21.42	-25.94
5	0.44688	10.12	24.50	11.53	34.62	21.65	56.93	46.93	-22.31	-25.28
6	4.83594	10.32	20.30	12.52	30.62	22.84	56.00	46.00	-25.38	-23.16

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

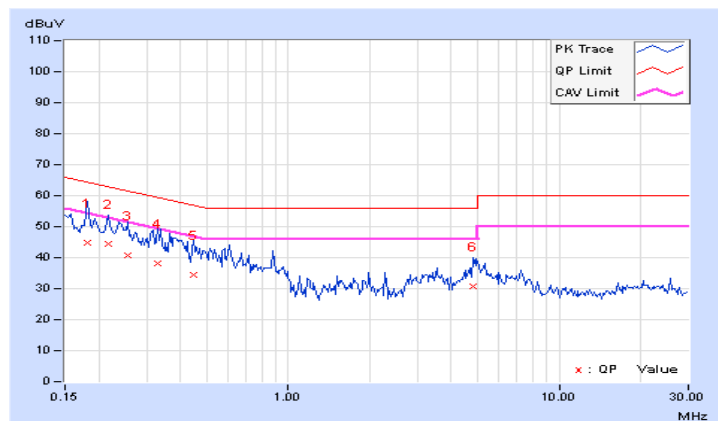


4.2.8 Test Results (Mode 2)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.09	49.26	37.34	59.35	47.43	66.00	56.00	-6.65	-8.57
2	0.17344	10.08	46.06	34.07	56.14	44.15	64.79	54.79	-8.65	-10.64
3	0.33359	10.10	35.66	22.46	45.76	32.56	59.36	49.36	-13.60	-16.80
4	0.44688	10.12	29.75	24.24	39.87	34.36	56.93	46.93	-17.06	-12.57
5	0.47813	10.13	35.84	29.51	45.97	39.64	56.37	46.37	-10.40	-6.73
6	0.58750	10.14	26.80	16.08	36.94	26.22	56.00	46.00	-19.06	-19.78
7	3.87891	10.35	22.03	14.82	32.38	25.17	56.00	46.00	-23.62	-20.83

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

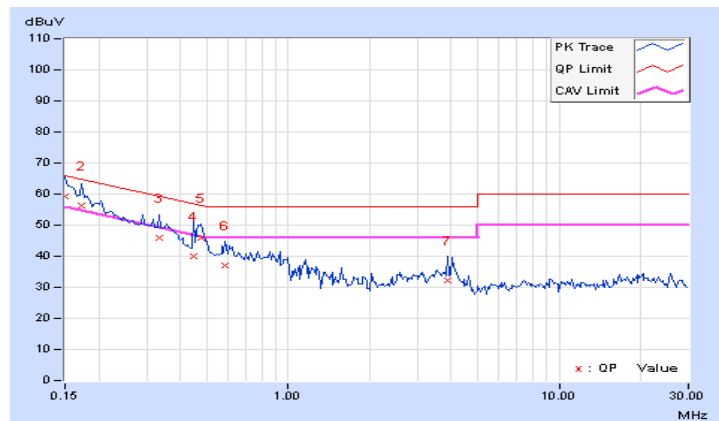


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.08	46.85	34.26	56.93	44.34	66.00	56.00	-9.07	-11.66
2	0.20469	10.04	39.68	26.60	49.72	36.64	63.42	53.42	-13.70	-16.78
3	0.37266	10.11	32.26	17.30	42.37	27.41	58.44	48.44	-16.07	-21.03
4	0.47422	10.12	32.30	20.61	42.42	30.73	56.44	46.44	-14.02	-15.71
5	0.59141	10.12	25.55	12.69	35.67	22.81	56.00	46.00	-20.33	-23.19
6	3.25000	10.24	22.95	12.47	33.19	22.71	56.00	46.00	-22.81	-23.29

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

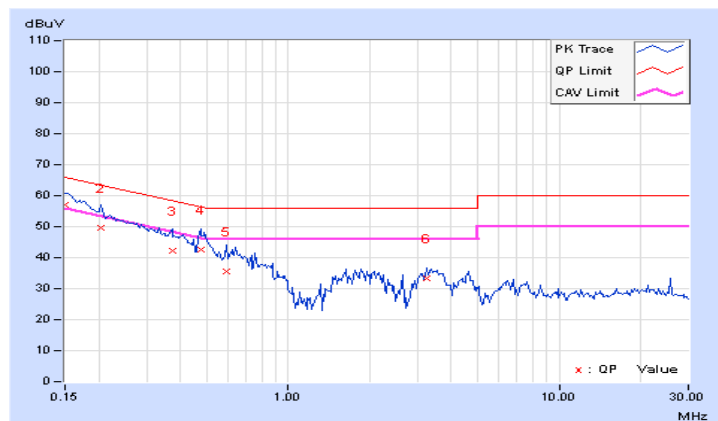


4.2.9 Test Results (Mode 3)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.09	48.29	32.66	58.38	42.75	66.00	56.00	-7.62	-13.25
2	0.18616	10.07	47.23	34.80	57.30	44.87	64.21	54.21	-6.91	-9.34
3	0.23203	10.08	41.35	28.69	51.43	38.77	62.38	52.38	-10.95	-13.61
4	0.27109	10.09	35.83	19.73	45.92	29.82	61.08	51.08	-15.16	-21.26
5	0.31797	10.10	34.54	20.67	44.64	30.77	59.76	49.76	-15.12	-18.99
6	0.36875	10.11	33.72	24.15	43.83	34.26	58.53	48.53	-14.70	-14.27
7	0.45078	10.12	26.47	12.67	36.59	22.79	56.86	46.86	-20.27	-24.07
8	8.30078	10.67	24.55	17.00	35.22	27.67	60.00	50.00	-24.78	-22.33

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

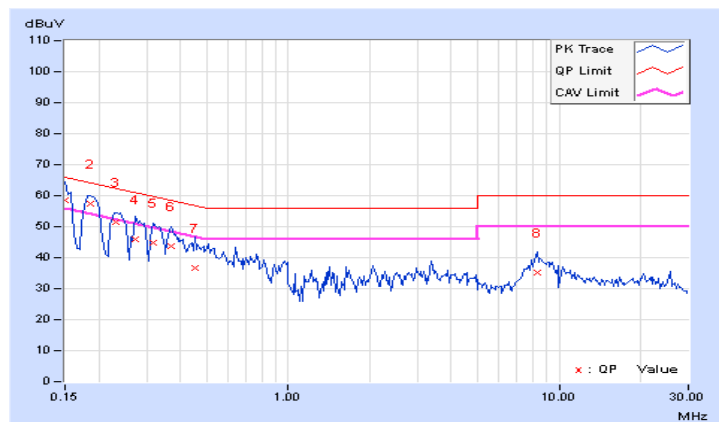


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	-----------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.08	47.68	32.24	57.76	42.32	66.00	56.00	-8.24	-13.68
2	0.18700	10.05	46.18	34.68	56.23	44.73	64.17	54.17	-7.94	-9.44
3	0.23203	10.05	40.23	27.56	50.28	37.61	62.38	52.38	-12.10	-14.77
4	0.27891	10.07	36.50	25.52	46.57	35.59	60.85	50.85	-14.28	-15.26
5	0.31797	10.09	33.66	21.33	43.75	31.42	59.76	49.76	-16.01	-18.34
6	0.37019	10.11	33.22	26.51	43.33	36.62	58.50	48.50	-15.17	-11.88
7	0.46250	10.12	26.52	17.47	36.64	27.59	56.65	46.65	-20.01	-19.06
8	3.46484	10.25	20.70	15.59	30.95	25.84	56.00	46.00	-25.05	-20.16

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

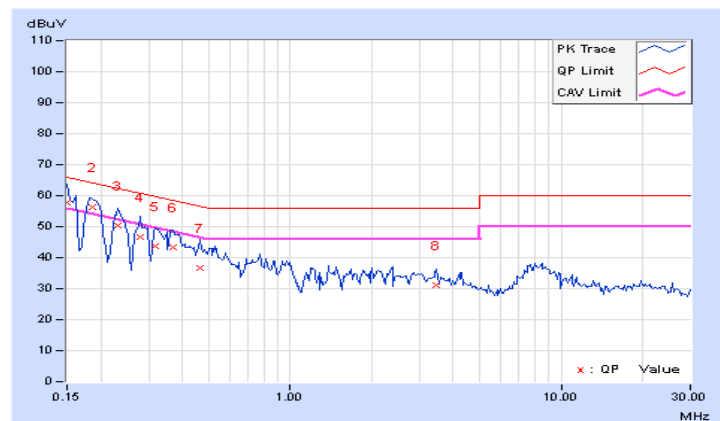


4.2.10 Test Results (Mode 4)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16562	10.08	24.29	15.37	34.37	25.45	65.18	55.18	-30.81	-29.73
2	0.50156	10.13	40.80	32.85	50.93	42.98	56.00	46.00	-5.07	-3.02
3	0.76719	10.15	29.54	20.57	39.69	30.72	56.00	46.00	-16.31	-15.28
4	0.98203	10.17	33.96	22.26	44.13	32.43	56.00	46.00	-11.87	-13.57
5	1.13672	10.17	31.27	20.71	41.44	30.88	56.00	46.00	-14.56	-15.12
6	8.53906	10.69	30.04	20.10	40.73	30.79	60.00	50.00	-19.27	-19.21

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

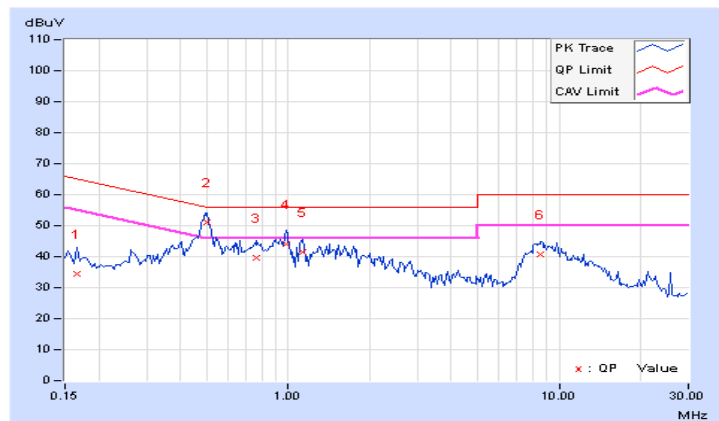


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.08	26.17	14.77	36.25	24.85	66.00	56.00	-29.75	-31.15
2	0.49816	10.12	38.75	27.11	48.87	37.23	56.03	46.03	-7.16	-8.80
3	0.77500	10.13	29.32	17.67	39.45	27.80	56.00	46.00	-16.55	-18.20
4	0.97813	10.13	30.32	18.61	40.45	28.74	56.00	46.00	-15.55	-17.26
5	1.63281	10.18	29.13	16.85	39.31	27.03	56.00	46.00	-16.69	-18.97
6	8.53516	10.60	28.64	18.07	39.24	28.67	60.00	50.00	-20.76	-21.33

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

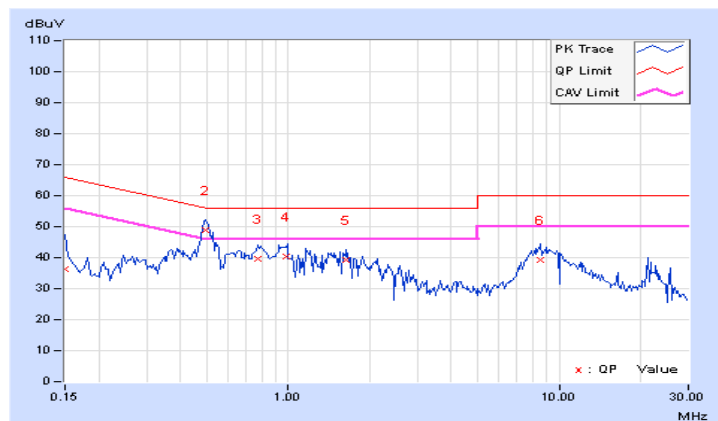


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	8.15	8.14	0.5	PASS
6	2437	8.12	8.12	0.5	PASS
11	2462	9.09	8.12	0.5	PASS

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	16.41	16.41	0.5	PASS
6	2437	16.37	16.38	0.5	PASS
11	2462	16.38	16.37	0.5	PASS

802.11n (HT20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	17.66	17.64	0.5	Pass
6	2437	17.65	17.65	0.5	Pass
11	2462	17.67	17.65	0.5	Pass

802.11n (HT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	35.21	35.20	0.5	Pass
6	2437	35.31	35.14	0.5	Pass
9	2452	35.34	35.26	0.5	Pass

Spectrum Plot of Worst Value


802.11b / Chain 0 : CH6

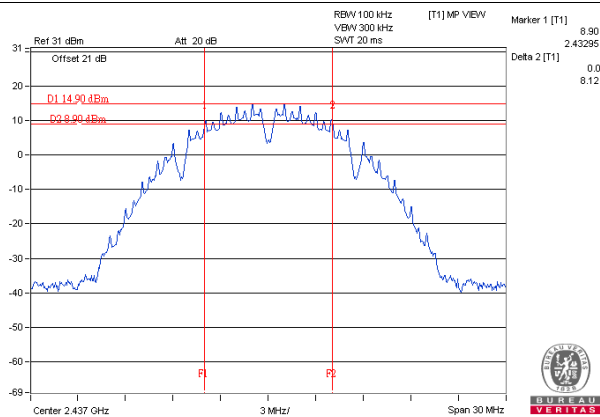


802.11g / Chain 0 : CH6

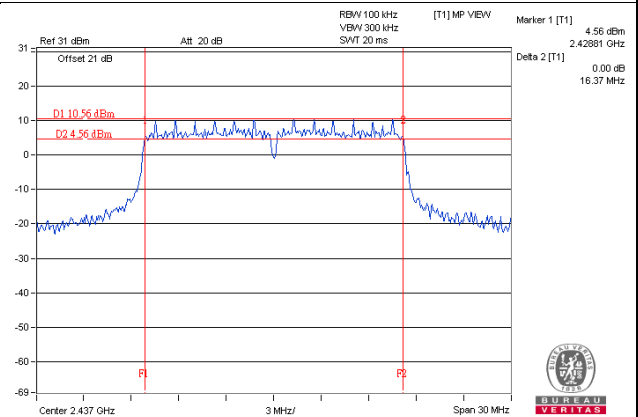

802.11n (HT20) / Chain 1 : CH1

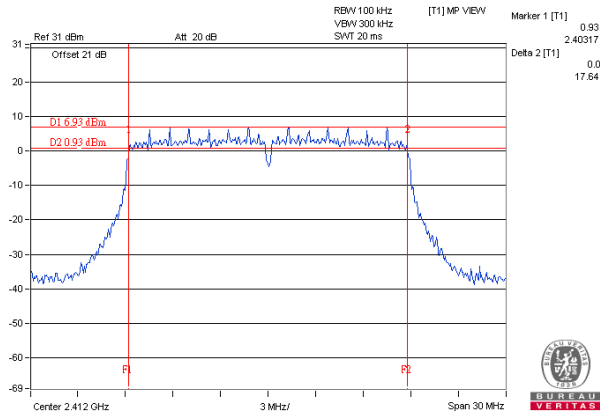

802.11n (HT40) / Chain 1 : CH6

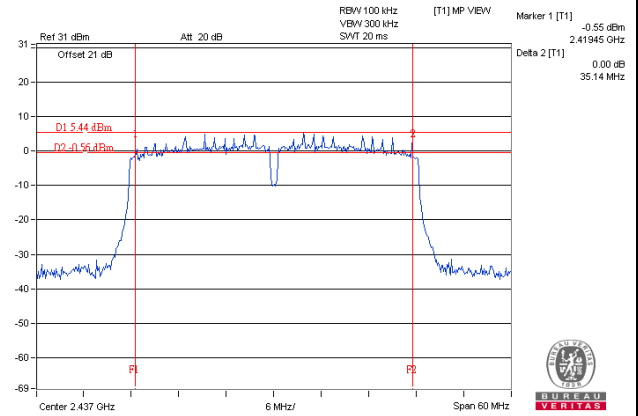

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor. Record the power level.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

CDD Mode

802.11b

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	23.69	23.82	474.875	26.77	30.00	Pass
6	2437	23.61	23.71	464.578	26.67	30.00	Pass
11	2462	23.57	23.51	451.898	26.55	30.00	Pass

802.11g

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	19.40	19.63	178.929	22.53	30.00	Pass
6	2437	22.10	22.18	327.377	25.15	30.00	Pass
11	2462	19.46	19.73	182.28	22.61	30.00	Pass

802.11n (HT20)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	19.21	19.11	164.838	22.17	30.00	Pass
6	2437	22.15	22.25	331.939	25.21	30.00	Pass
11	2462	19.23	19.17	166.357	22.21	30.00	Pass

802.11n (HT40)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	17.82	17.74	119.963	20.79	30.00	Pass
6	2437	19.62	19.72	185.378	22.68	30.00	Pass
9	2452	17.76	17.75	119.27	20.77	30.00	Pass

Beamforming Mode

802.11n (HT20)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	19.21	19.11	164.838	22.17	30.00	Pass
6	2437	22.15	22.25	331.939	25.21	30.00	Pass
11	2462	19.23	19.17	166.357	22.21	30.00	Pass

Note: 1. Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 4.91\text{dBi} < 6\text{dBi}$, so the power limit shall not be reduced.

802.11n (HT40)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	17.82	17.74	119.963	20.79	30.00	Pass
6	2437	19.62	19.72	185.378	22.68	30.00	Pass
9	2452	17.76	17.75	119.27	20.77	30.00	Pass


Note: 1. Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 4.91\text{dBi} < 6\text{dBi}$, so the power limit shall not be reduced.

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

802.11b, 802.11n (HT20)

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

802.11g, 802.11n (HT40)

- Measure the duty cycle (x).
- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- Sweep time = auto couple.
- Do not use sweep triggering. Allow sweep to "free run".
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-5.67	3.01	-2.66	8.00	Pass
	6	2437	-5.15	3.01	-2.14	8.00	Pass
	11	2462	-5.69	3.01	-2.68	8.00	Pass
1	1	2412	-5.26	3.01	-2.25	8.00	Pass
	6	2437	-5.56	3.01	-2.55	8.00	Pass
	11	2462	-5.37	3.01	-2.36	8.00	Pass

Note: 1. Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 4.91\text{dBi} < 6\text{dBi}$, so the power density limit shall not be reduced.

802.11g

TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/3kHz)	10 log (N=2) dB	Duty Factor (dB)	TOTAL PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-13.13	3.01	0.19	-9.93	8.00	Pass
	6	2437	-10.90	3.01	0.19	-7.70	8.00	Pass
	11	2462	-13.36	3.01	0.19	-10.16	8.00	Pass
1	1	2412	-13.28	3.01	0.19	-10.08	8.00	Pass
	6	2437	-11.05	3.01	0.19	-7.85	8.00	Pass
	11	2462	-13.03	3.01	0.19	-9.83	8.00	Pass

Note: 1. Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 4.91\text{dBi} < 6\text{dBi}$, so the power density limit shall not be reduced.

2. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-14.62	3.01	-11.61	8.00	Pass
	6	2437	-11.50	3.01	-8.49	8.00	Pass
	11	2462	-14.05	3.01	-11.04	8.00	Pass
1	1	2412	-13.49	3.01	-10.48	8.00	Pass
	6	2437	-10.57	3.01	-7.56	8.00	Pass
	11	2462	-13.82	3.01	-10.81	8.00	Pass

Note: 1. Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 4.91\text{dBi} < 6\text{dBi}$, so the power density limit shall not be reduced.

802.11n (HT40)


TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/3kHz)	10 log (N=2) dB	Duty Factor (dB)	TOTAL PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	3	2422	-17.79	3.01	0.16	-14.62	8.00	Pass
	6	2437	-16.10	3.01	0.16	-12.93	8.00	Pass
	9	2452	-18.47	3.01	0.16	-15.30	8.00	Pass
1	3	2422	-18.30	3.01	0.16	-15.13	8.00	Pass
	6	2437	-16.19	3.01	0.16	-13.02	8.00	Pass
	9	2452	-18.34	3.01	0.16	-15.17	8.00	Pass

Note: 1. Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 4.91\text{dBi} < 6\text{dBi}$, so the power density limit shall not be reduced.


2. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11b / Chain 0 : CH6

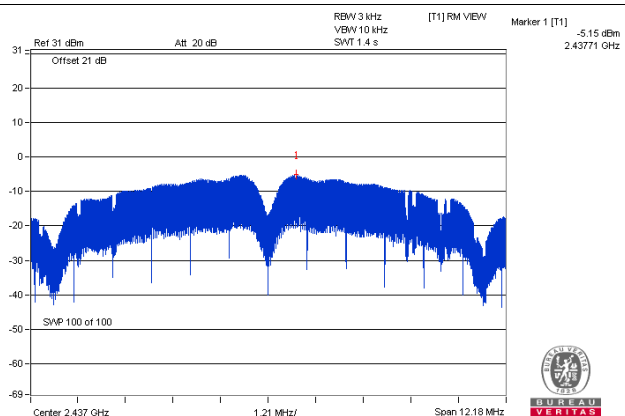


802.11g / Chain 0 : CH6

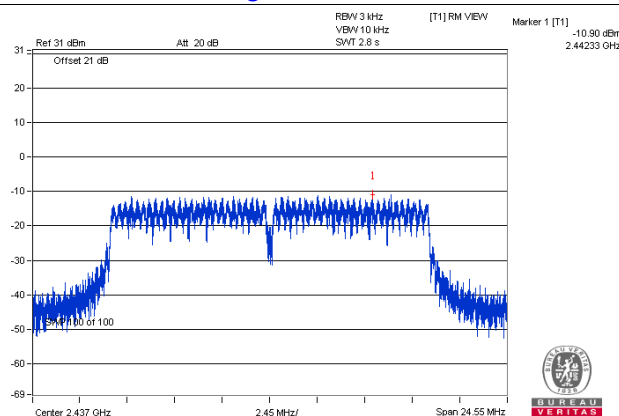

802.11n (HT20) / Chain 1 : CH6

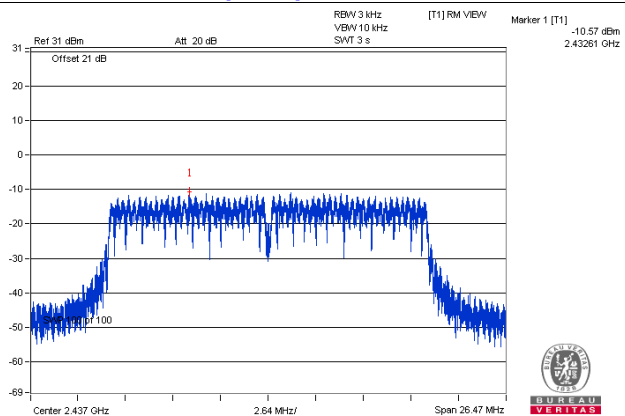

802.11n (HT40) / Chain 0 : CH6

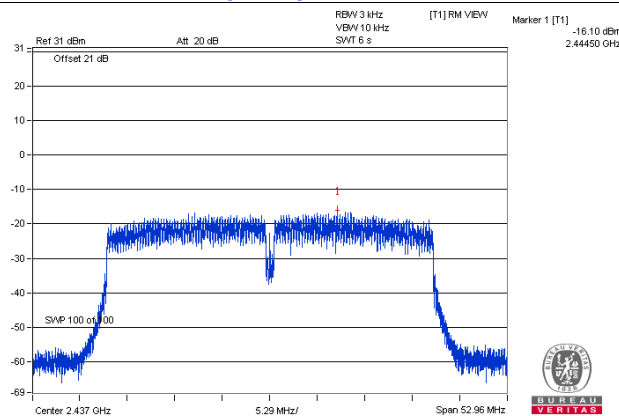


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below -30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.


4.6.6 EUT Operating Condition

Same as Item 4.3.6


4.6.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.


802.11b

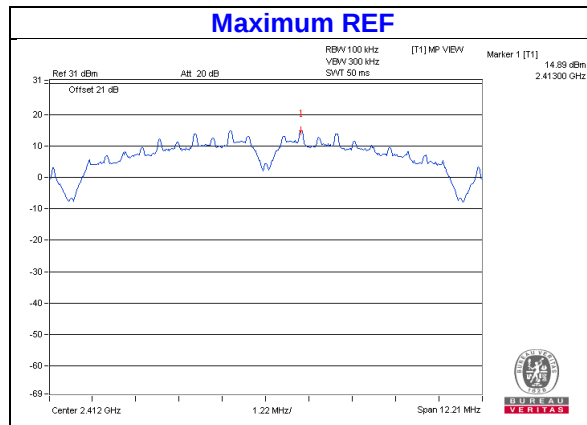


Chain 0

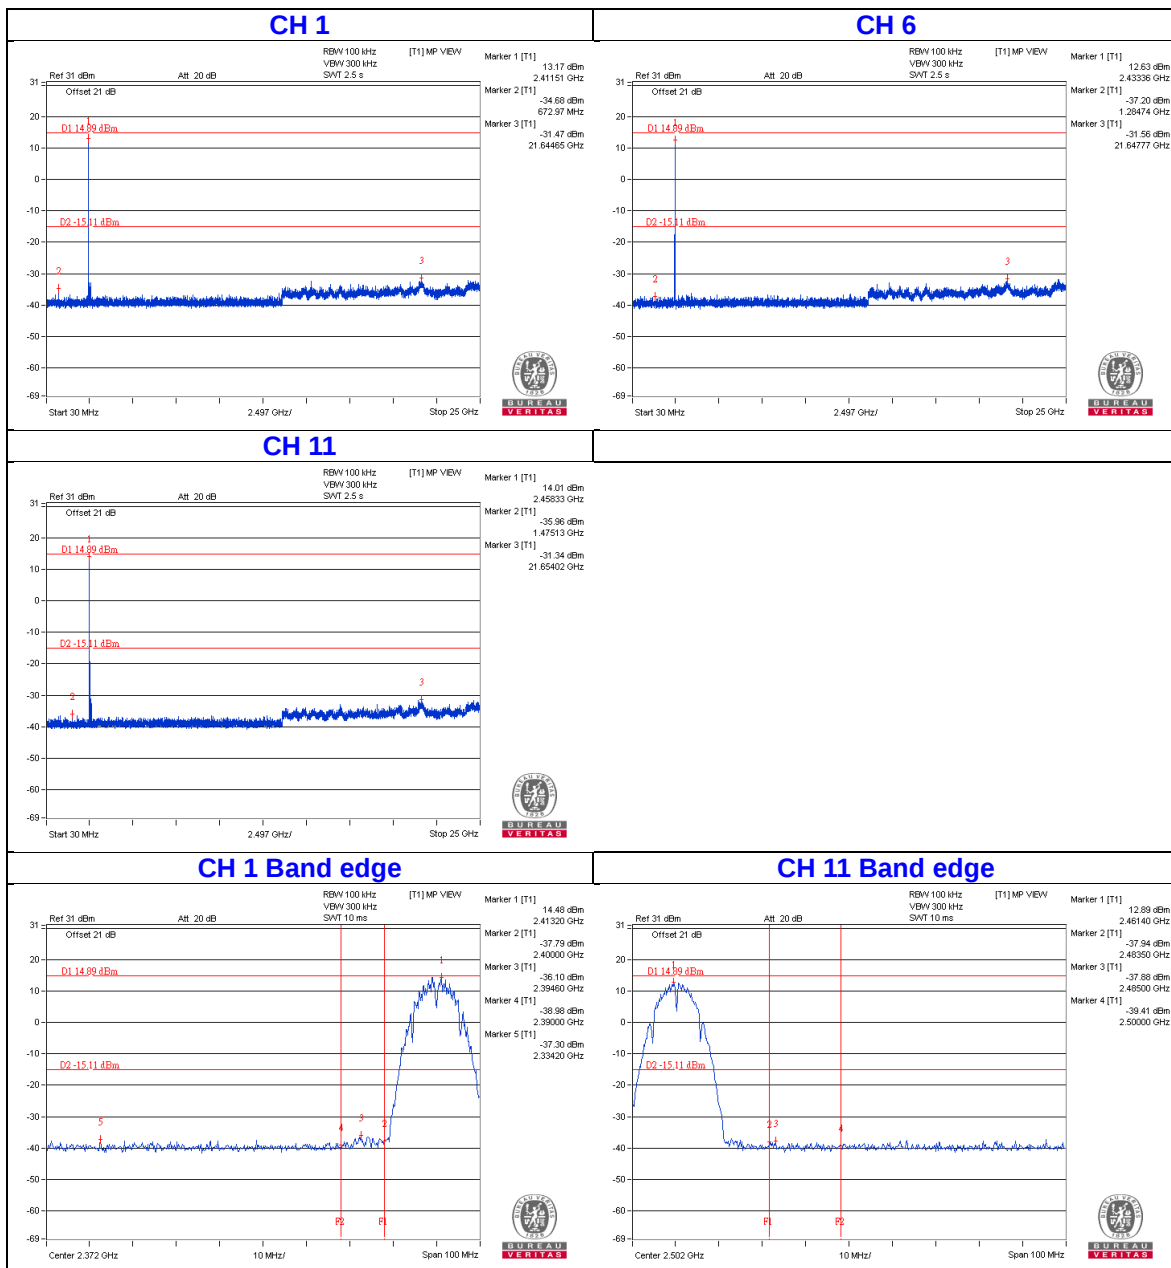


Chain 1

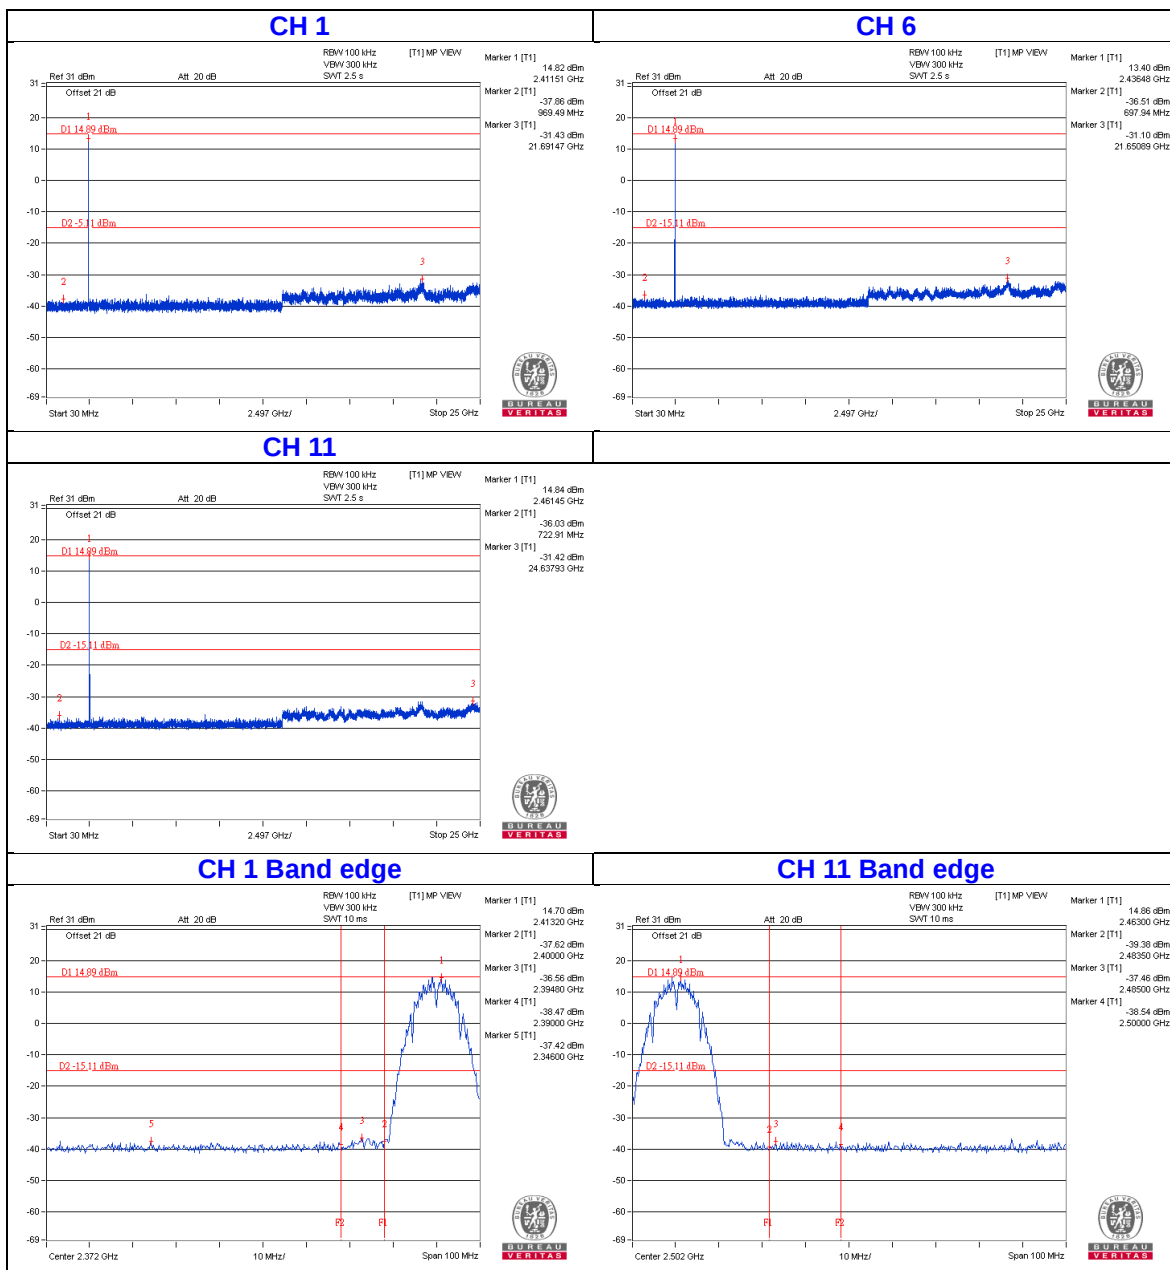


802.11g

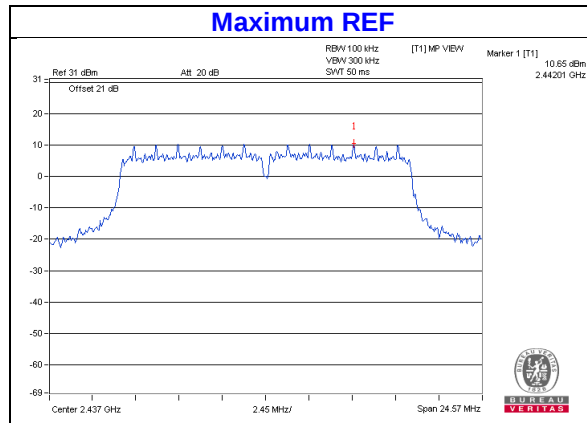


Chain 0

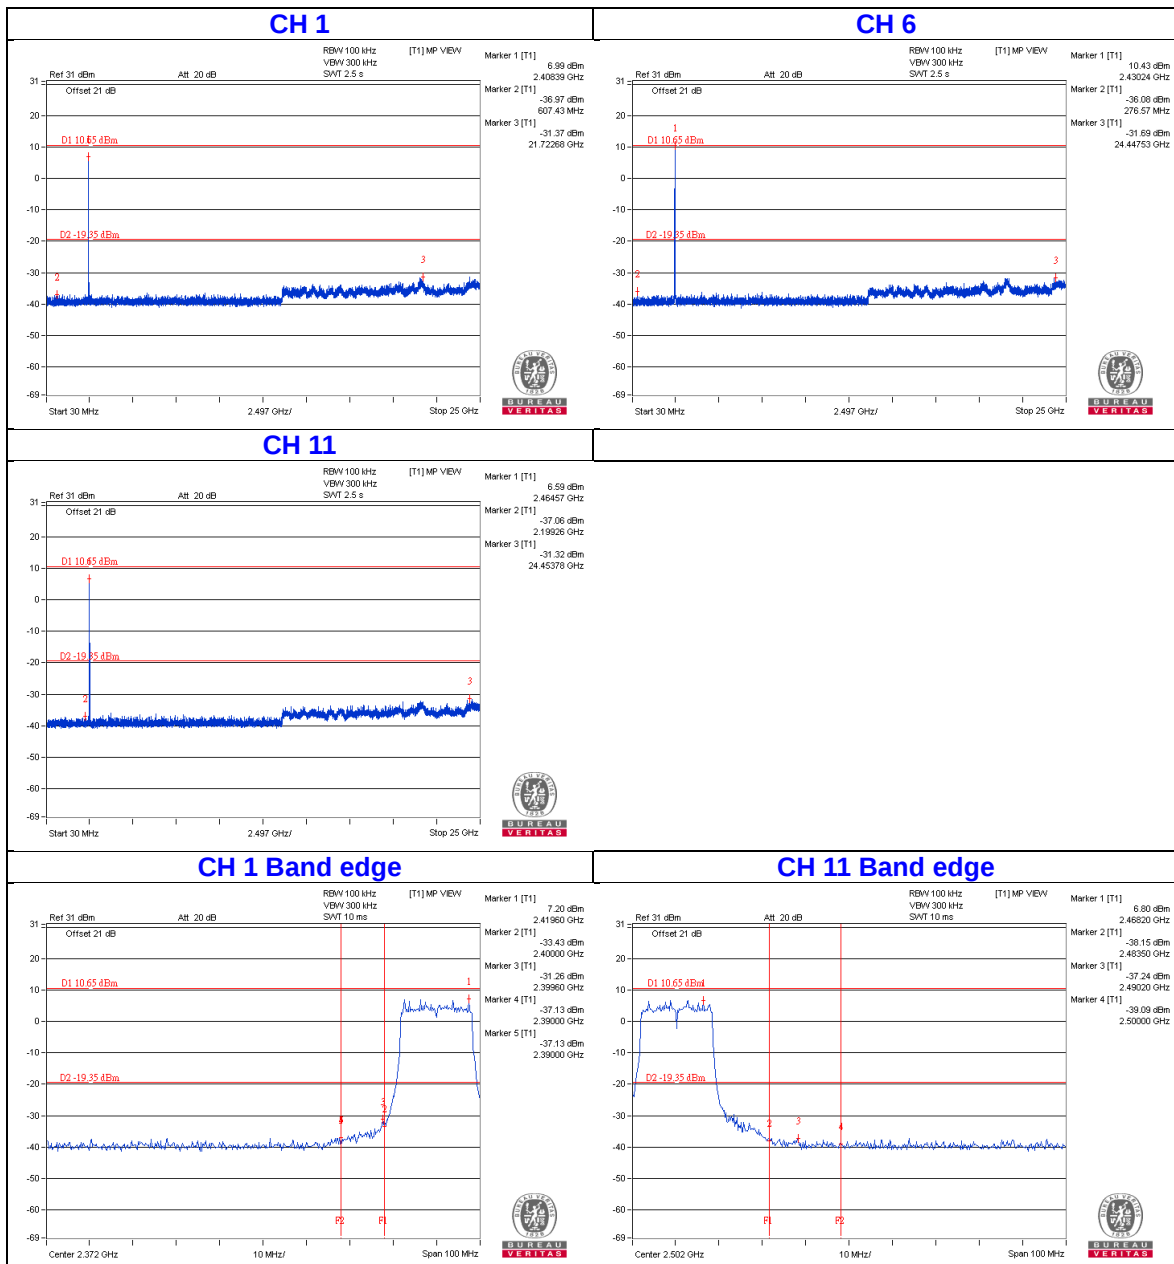


Chain 1

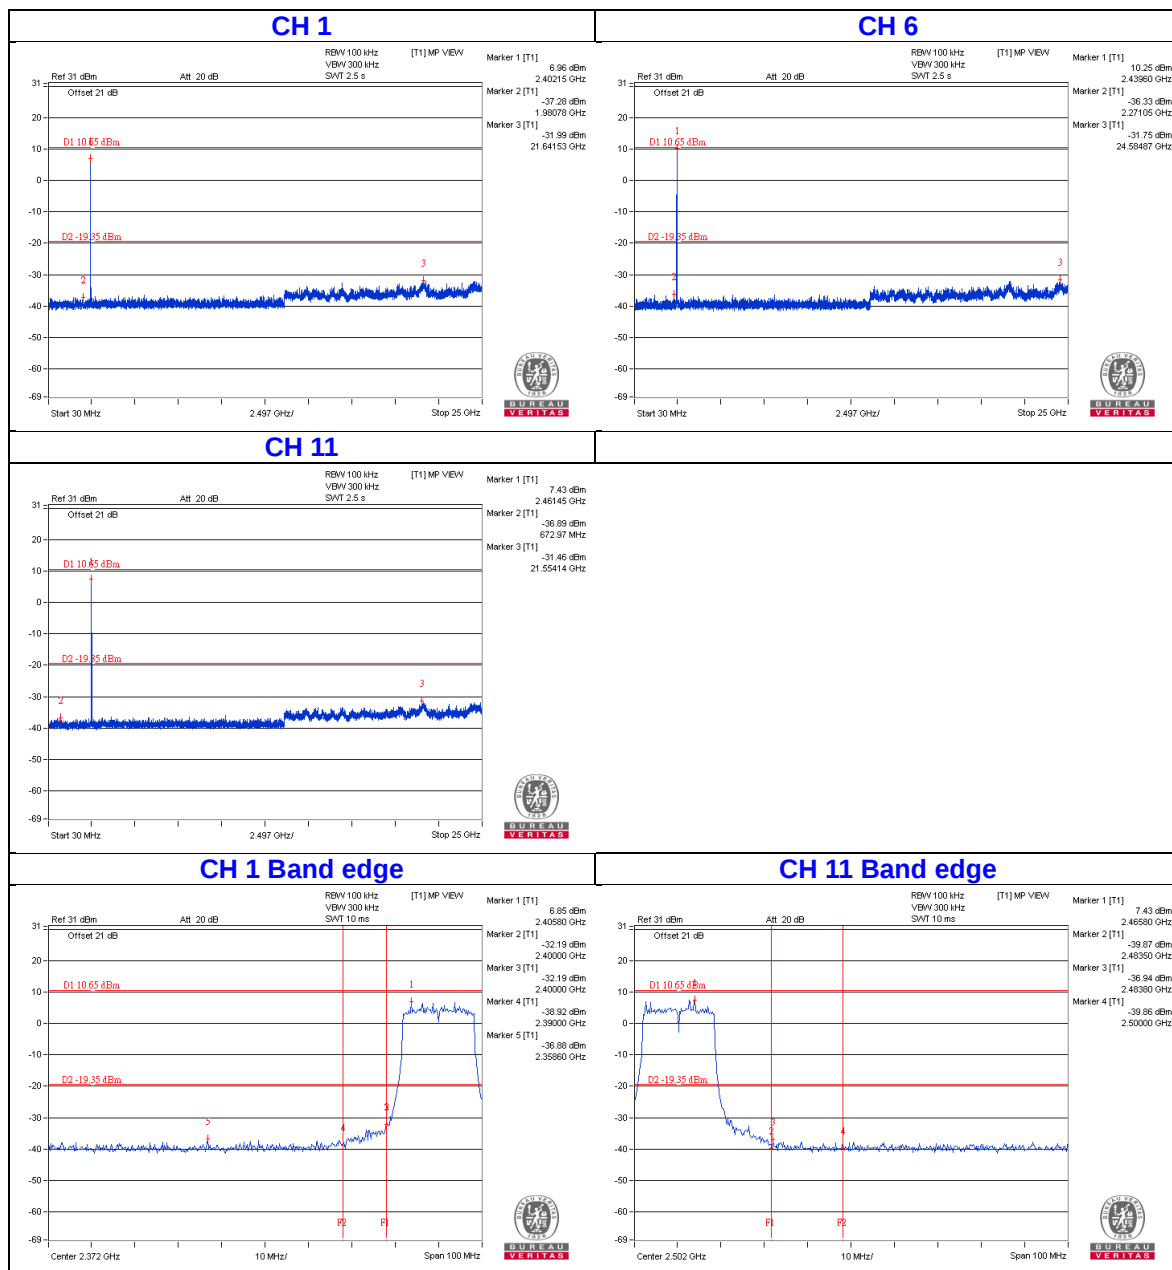


802.11n (HT20)

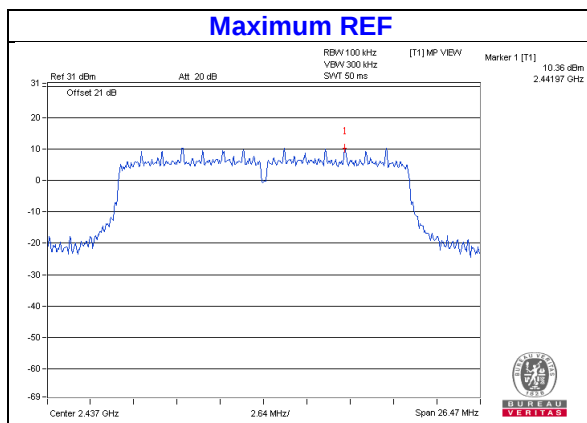


Chain 0

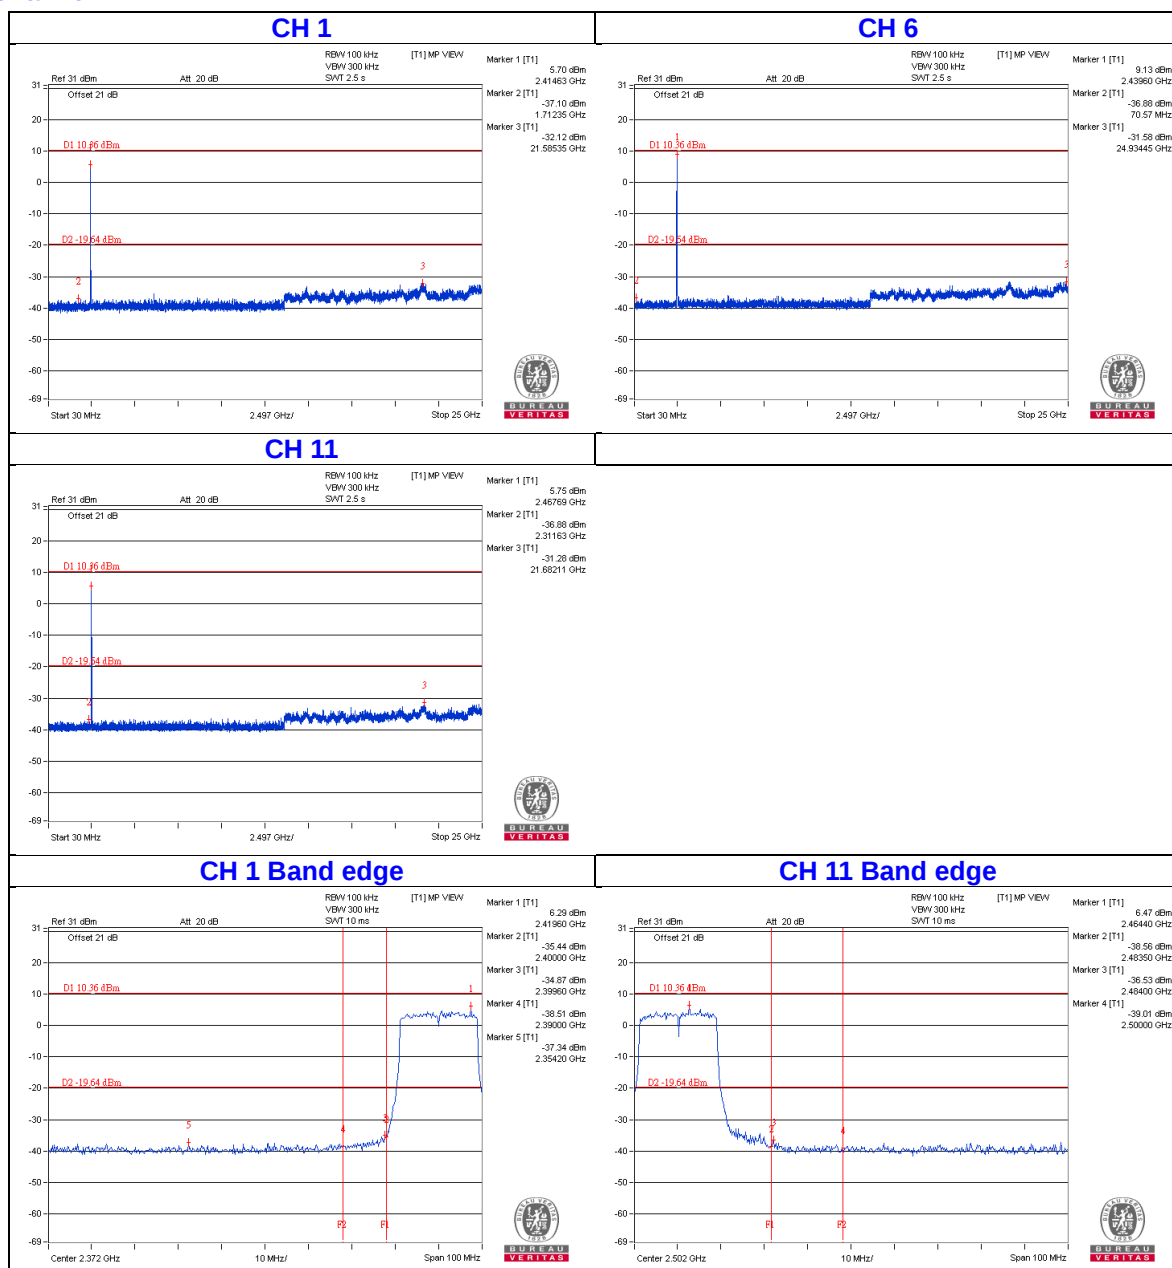


Chain 1

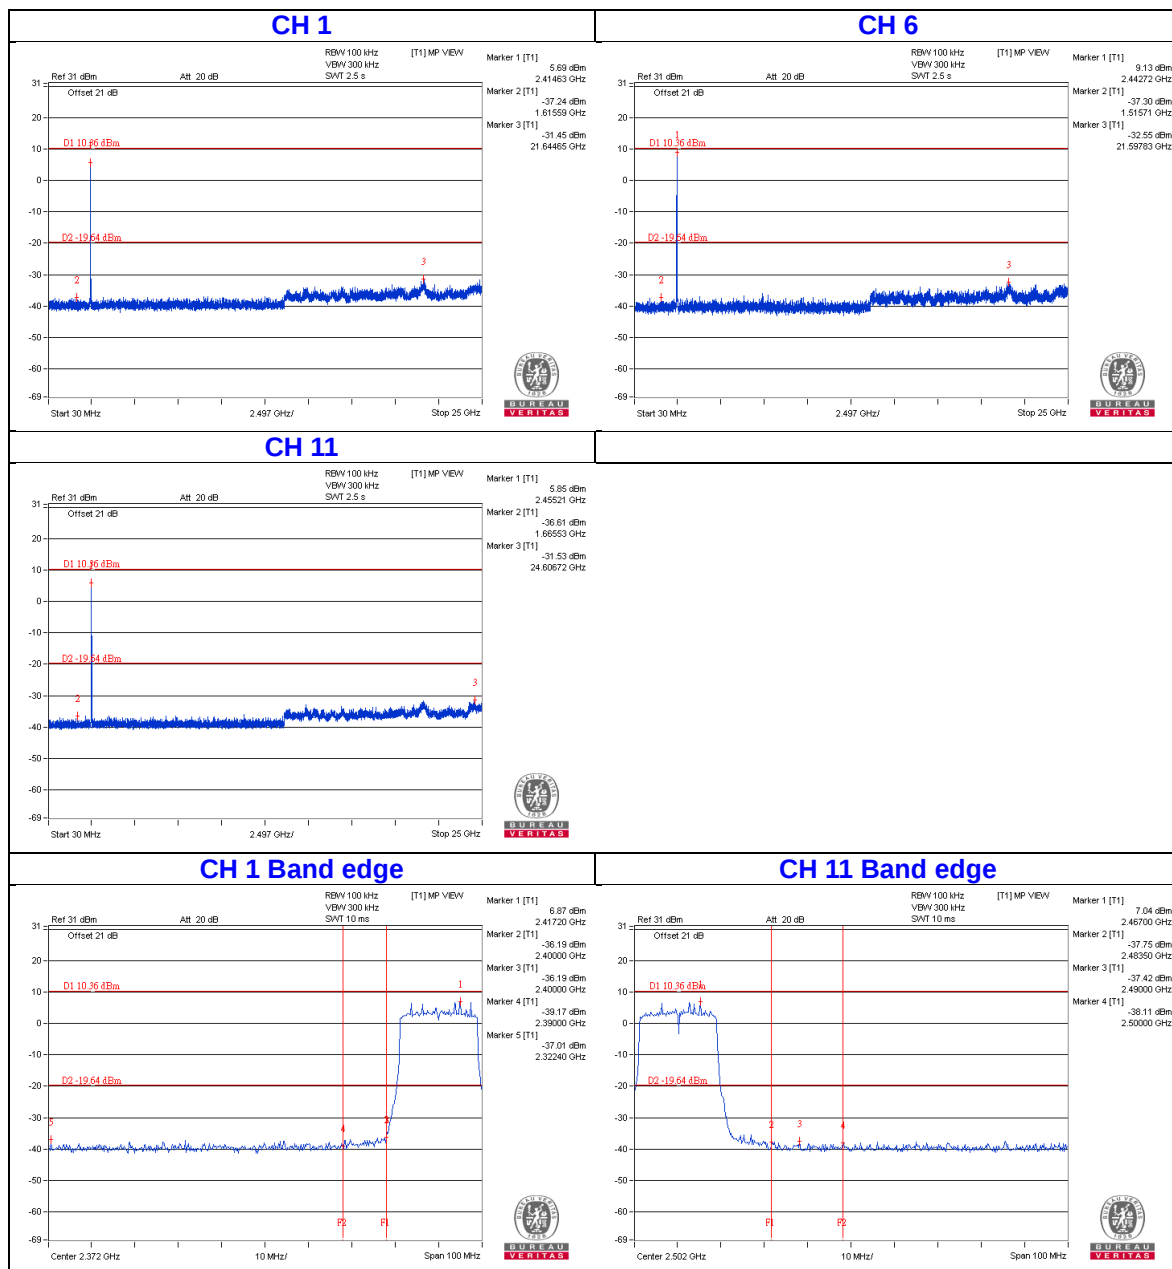


802.11n (HT40)

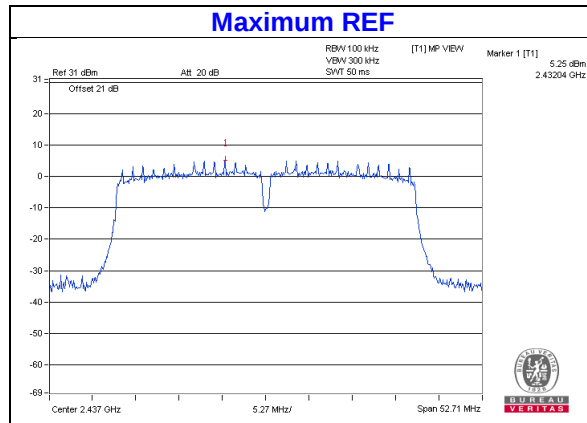

Chain 0

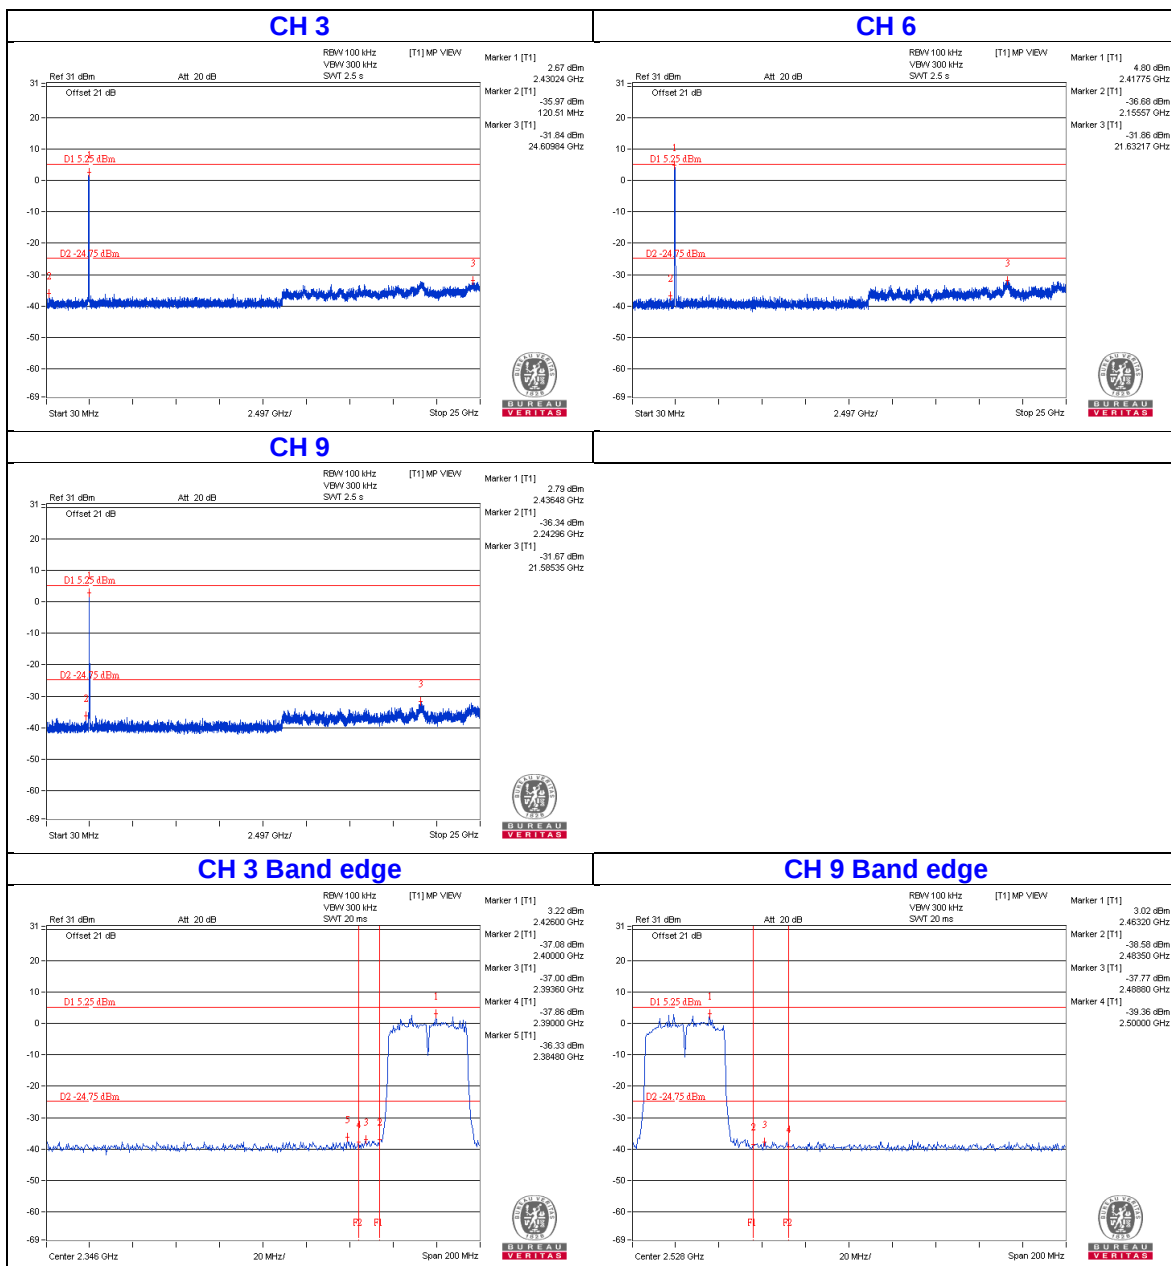

Chain 1

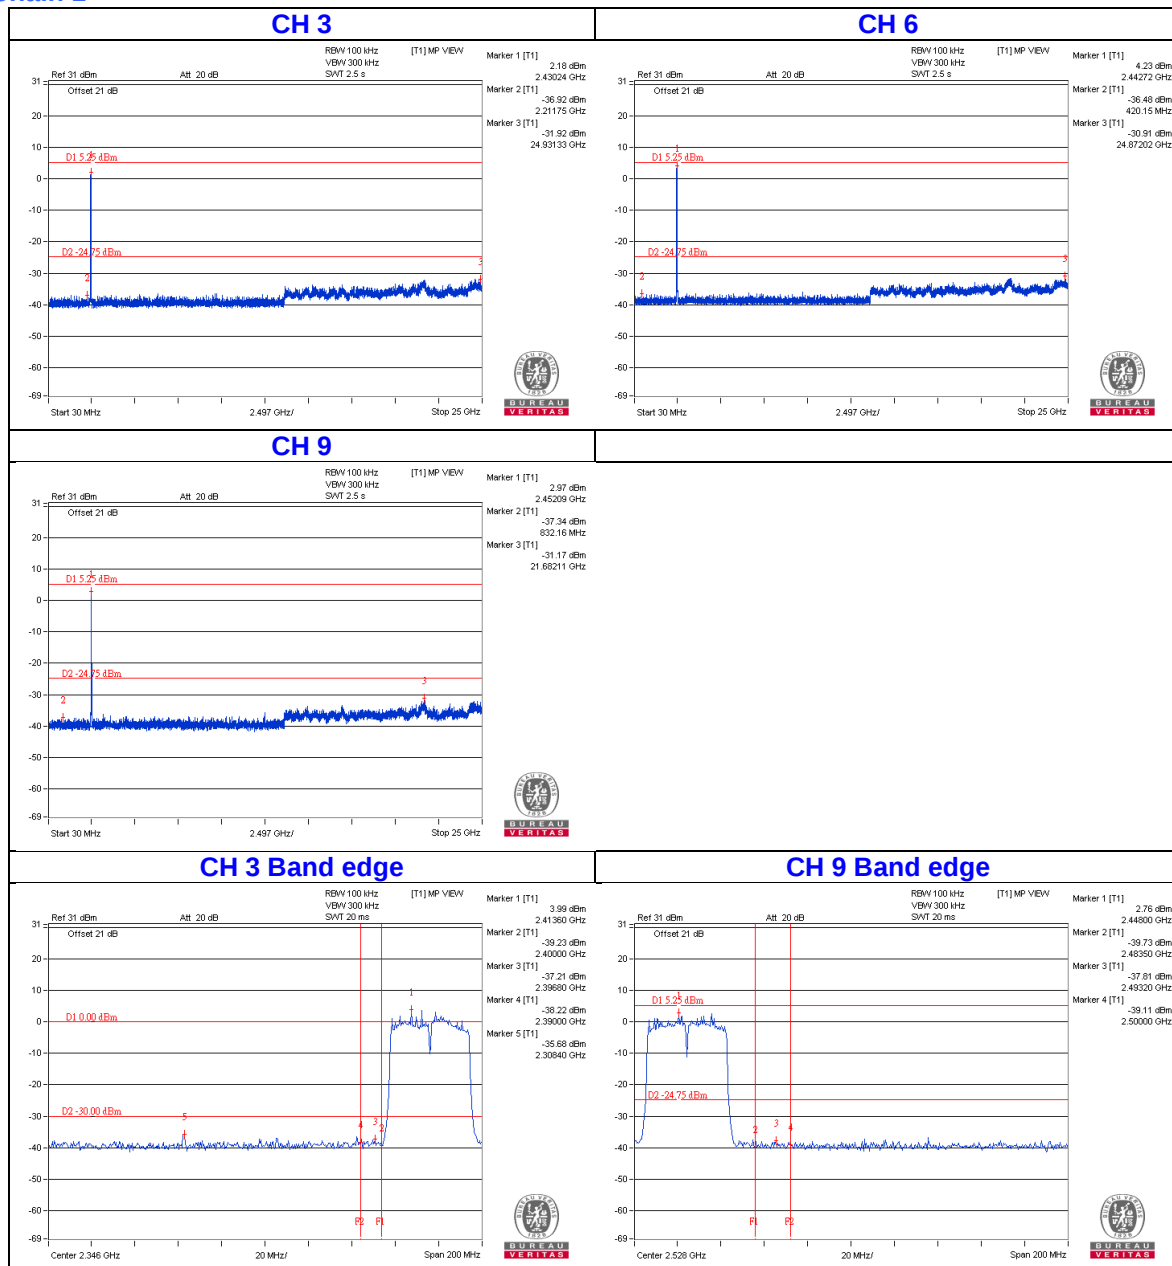

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linkou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---