


Rear View

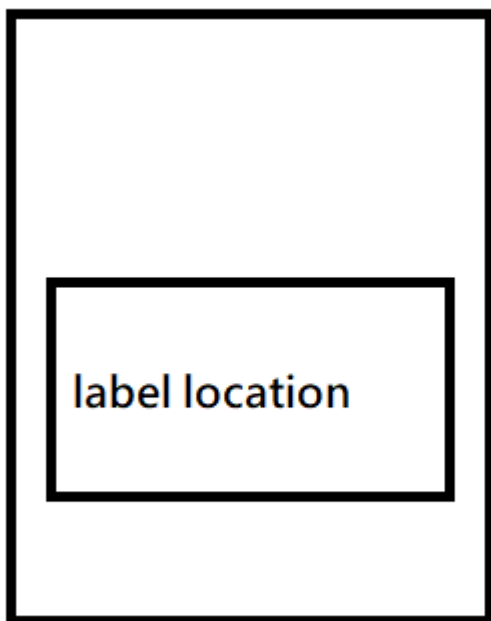

FCC ID: Q87-03530

IC: 3839A-03530

LINKSYS RE6900 PRODUCT ID LABEL
P/N:
Description:
Belkin P/N & Revision: XXXX-XXXX RevA00

Size: 57.96*49.85mm (tolerance±0.2mm)
Material: 50μ White Matt Polyester Film Label with Depressive Liner (thickness: 0.052mm±0.004)
+ embossing adhesive (thickness: 0.033mm±0.003)
+ Text opp film matt + Light stripping release paper + Roll up, with tearing line
50番白色霧面特多龍(thickness: 0.052mm±0.004) + 壓花膠(thickness: 0.033mm±0.003)
+ 打字霧膜 + 輕剝離型紙 + 捲狀進貨, 捲狀樣品請加上齒刀
Environment: All materials and surface finish should comply with RoHS directive
材質, 噴漆, 印刷油墨及表面殘留物, 均需符合RoHS之有害物質檢驗標準

☐

Original


☐

PMS COOL GRAY 2C



☐

PMS BLACK C

Printing content for supplier
供應商印刷內容

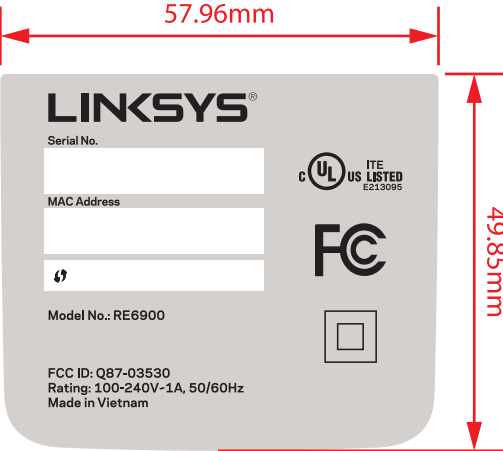

Printing position for factory
工廠列印示意圖
The info. in pink just an illustration for factory, actual printing will be in black.
洋紅資訊為參考用, 工廠以黑色列印

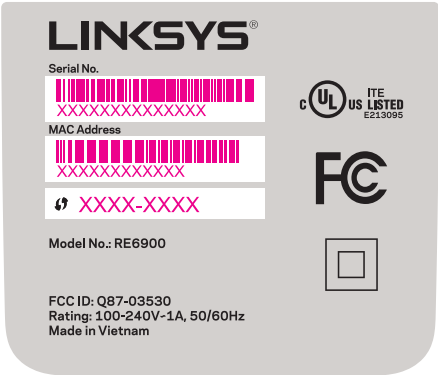

測試 / 檢驗 項目	測試標準
初粘力 (#)	1~6
粘著力 (kgf/inch)	1.0~2.2
保持力 (hr/kgxinch²)	1 ↑

LINKSYS RE7000v2 PRODUCT ID LABEL

P/N:


Description:

Belkin P/N & Revision: 8830-26258 RevA00

Size: 57.96*49.85mm (tolerance±0.2mm)
Material: 50μ White Matt Polyester Film Label with Depressive Liner (thickness: 0.052mm±0.004)
+ embossing adhesive (thickness: 0.033mm±0.003)
+ Text opp film matt + Light stripping release paper + Roll up, with tearing line
50番白色霧面特多龍(thickness: 0.052mm±0.004) + 壓花膠(thickness: 0.033mm±0.003)
+ 打字霧膜 + 輕剝離型紙 + 捲狀進貨, 捲狀樣品請加上齒刀
Environment: All materials and surface finish should comply with RoHS directive
材質, 噴漆, 印刷油墨及表面殘留物, 均需符合RoHS之有害物質檢驗標準





Printing content for supplier
供應商印刷內容

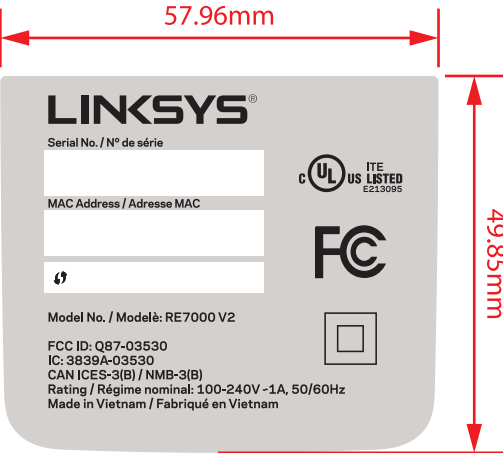

Printing position for factory
工廠列印示意圖

The info. in pink just an illustration for factory,
actual printing will be in black.
洋紅資訊為參考用, 工廠以黑色列印

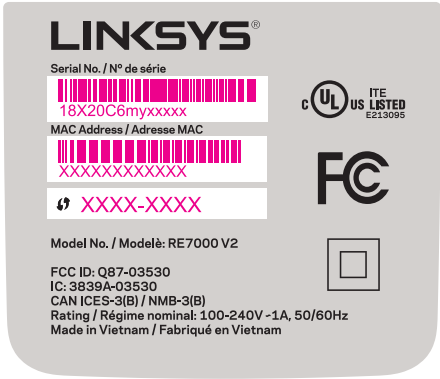


測試 / 檢驗 項目	測試標準
初粘力 (#)	1~6
粘著力 (kgf/inch)	1.0~2.2
保持力 (hr/kgxinch²)	1 ↑

LINKSYS RE7100 PRODUCT ID LABEL
P/N:
Description:
Belkin P/N & Revision: XXXX-XXXX RevA00



Size: 57.96*49.85mm (tolerance±0.2mm)
Material: 50μ White Matt Polyester Film Label with Depressive Liner (thickness: 0.052mm±0.004)
+ embossing adhesive (thickness: 0.033mm±0.003)
+ Text opp film matt + Light stripping release paper + Roll up, with tearing line
50番白色霧面特多龍(thickness: 0.052mm±0.004) + 壓花膠(thickness: 0.033mm±0.003)
+ 打字霧膜 + 輕剝離型紙 + 捲狀進貨, 捲狀樣品請加上齒刀
Environment: All materials and surface finish should comply with RoHS directive
材質, 噴漆, 印刷油墨及表面殘留物, 均需符合RoHS之有害物質檢驗標準



Printing content for supplier
供應商印刷內容

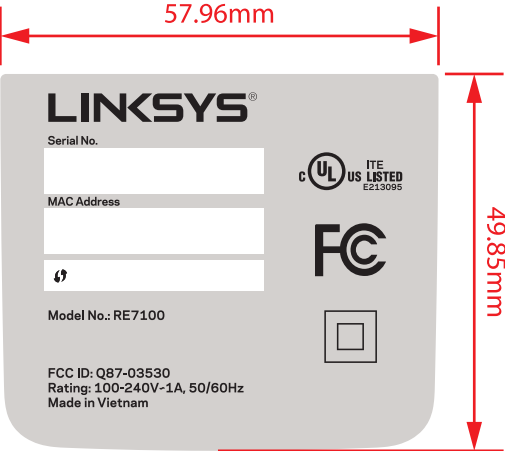

Printing position for factory
工廠列印示意圖
The info. in pink just an illustration for factory, actual printing will be in black.
洋紅資訊為參考用, 工廠以黑色列印

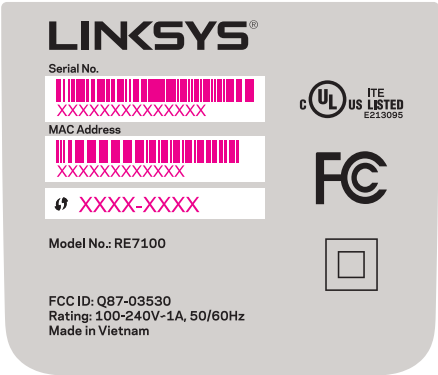

測試 / 檢驗 項目	測試標準
初粘力 (#)	1~6
粘著力 (kgf/inch)	1.0~2.2
保持力 (hr/kgxinch²)	1 ↑