



File Name : J004673C

Scan Settings (3 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detection	M-Time	Atten	Preamp
150k	1M	5k	9k	QP+AV	20ms	AUTO LN	OFF
1M	10M	10K	9k	QP+AV	20ms	AUTO LN	OFF
10M	30M	50k	9k	QP+AV	20ms	AUTO LN	OFF

Final Measurement: x QP / + AV

Meas Time: 1 s

Subranges: 16

Acc Margin: 30dB

Transducer No. Start

2 150k


Stop

30M

Name

LIMITER

dBuV

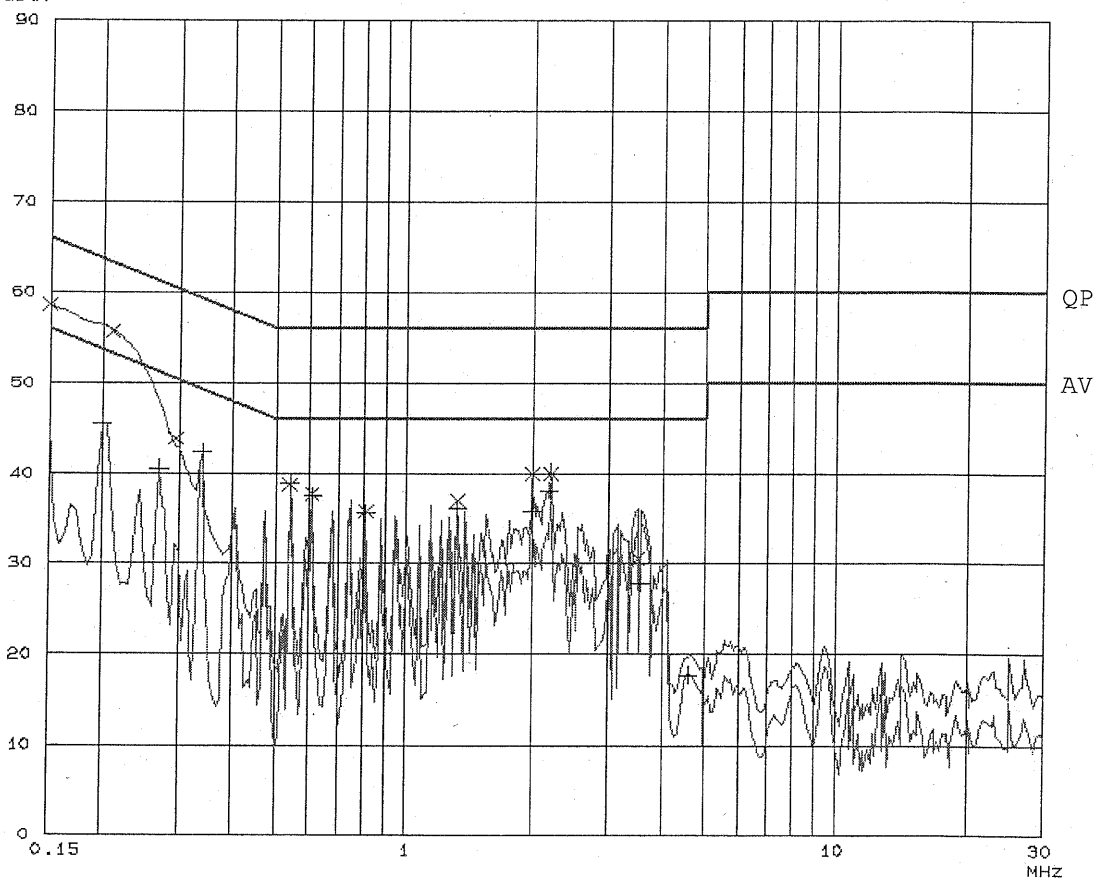



File Name : J004673C

Date: 27-08-04 11:01

Final Measurement Results:

Indicated Phase/PE shows Configuration of max. Emission

Frequency:	QP Level: dB	Delta Limit: dB	Phase:	PE:
150.00 kHz	58.6	-7.4	L1	f1
210.00 kHz	55.7	-7.5	L1	f1
295.00 kHz	43.9	-16.5	N	f1
540.00 kHz	38.7	-17.3	L1	f1
610.00 kHz	37.7	-18.3	L1	f1
810.00 kHz	35.9	-20.1	N	f1
1.33000 MHz	37.0	-19.0	L1	f1
1.99000 MHz	40.0	-16.1	L1	f1
2.19000 MHz	40.0	-16.1	N	f1
3.50000 MHz	30.6	-25.4	L1	f1

Frequency:	AV Level: dB	Delta Limit: dB	Phase:	PE:
200.00 kHz	45.5	-8.2	L1	f1
270.00 kHz	40.6	-10.6	L1	f1
340.00 kHz	42.3	-7.0	L1	f1
540.00 kHz	38.9	-7.1	L1	f1
610.00 kHz	37.5	-8.5	L1	f1
810.00 kHz	35.6	-10.4	N	f1
1.33000 MHz	36.1	-9.9	N	f1
1.99000 MHz	35.9	-10.1	L1	f1
2.18000 MHz	38.0	-8.0	N	f1
3.56000 MHz	27.9	-18.1	L1	f1
4.58000 MHz	17.8	-28.3	N	f1