



DATE: 12 November 2013

I.T.L. (PRODUCT TESTING) LTD.

FCC Radio Test Report


for


Cardo Peripheral Systems


Equipment under test:

Bluetooth Headset

Scala Rider Q1

Written by: 
R. Pinchuck, Documentation

Approved by: 
A. Sharabi, Test Engineer

Approved by: 
I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.



Measurement/Technical Report for Cardo Peripheral Systems

Bluetooth Headset

Scala Rider Q1

FCC ID: Q95ER16

This report concerns:

Original Grant:

Class I Change:

Class II Change: X

Equipment type:

Spread Spectrum Transmitter

Limits used:

47CFR15 Section 15.247

Measurement procedure used is Public Notice: DA 00-705 Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems and ANSI C63.4-2003.

Application for Certification
prepared by:

Ronit Pinchuck
ITL (Product Testing) Ltd.
1 Bat Sheva St.
Lod, 7116002
Israel
e-mail Rpinchuck@itl.co.il

Applicant for this device:
(different from "prepared by")

Avi Moato
Cardo Peripheral Systems
13 Hamifal St.,
Or Yehuda, 60221
Israel
Tel: +973-3-735-3111
Fax: +973-3-562-3360
e-mail: moato@cardosystems.com

TABLE OF CONTENTS

1.	GENERAL INFORMATION -----	4
1.1	Administrative Information	4
1.2	List of Accreditations	5
1.3	Product Description	6
1.4	Test Methodology	6
1.5	Test Facility	6
1.6	Measurement Uncertainty	6
2.	SYSTEM TEST CONFIGURATION-----	7
2.1	Justification	7
2.2	Special Accessories	7
2.3	Equipment Modifications	7
2.4	Configuration of Tested System	7
3.	TEST SETUP PHOTOS-----	8
4.	MAXIMUM TRANSMITTED PEAK POWER OUTPUT -----	10
4.1	Test Specification	10
4.2	Test procedure	10
4.1	Test Equipment Used.....	15
5.	BAND EDGE SPECTRUM -----	16
5.1	Test Specification	16
5.2	Test procedure	16
5.3	Test Results.....	16
5.4	Band Edge Spectrum Test Equipment Used.	18
6.	RADIATED EMISSION, 9 KHZ – 30 MHZ -----	19
6.1	Test Specification	19
6.2	Test Procedure	19
6.3	Measured Data	19
6.4	Test Instrumentation Used, Radiated Measurements.....	20
6.5	Field Strength Calculation	20
7.	SPURIOUS RADIATED EMISSION 30 – 1000 MHZ-----	21
7.1	Test Specification	21
7.2	Test Procedure	21
7.3	Test Data	22
7.4	Test Instrumentation Used, Radiated Measurements.....	23
7.5	Field Strength Calculation	23
8.	SPURIOUS RADIATED EMISSION ABOVE 1 GHZ -----	24
8.1	Radiated Emission Above 1 GHz	24
8.2	Test Data	25
8.3	Test Instrumentation Used, Radiated Measurements Above 1 GHz	32
9.	ANTENNA GAIN/INFORMATION-----	33
10.	R.F EXPOSURE/SAFETY-----	34
11.	APPENDIX A - CORRECTION FACTORS -----	36
11.1	Correction factors for CABLE	36
11.2	Correction factors for CABLE	37
11.3	Correction factors for CABLE	38
12.6	Correction factors for LOG PERIODIC ANTENNA	39
11.4	Correction factors for Antenna Biconical.....	40
11.6	Correction factors for Double-Ridged Waveguide Horn.....	41
11.7	Correction factors for Horn Antenna	42
11.8	Correction factors for ACTIVE LOOP ANTENNA	43

1. General Information

1.1 Administrative Information

Manufacturer:	Cardo Peripheral Systems
Manufacturer's Address:	13 Hamifal St., Or Yehuda, 60221, Israel Tel: +973-3-735-3111 Fax: +973-3-562-3360
Manufacturer's Representative:	Avi Moato
Equipment Under Test (E.U.T):	Bluetooth Headset
Equipment Model No.:	Scala Rider Q1
Equipment Serial No.:	Not Designated
Date of Receipt of E.U.T:	15.07.13
Start of Test:	15.07.13
End of Test:	16.07.13
Test Laboratory Location:	I.T.L (Product Testing) Ltd. Kfar Bin Nun, ISRAEL 9978000
Test Specifications:	See Section 2



1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025B-1.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 Product Description

The E.U.T. is a Bluetooth headset, technology compliant with Bluetooth™ Ver 3.0, Bluetooth intercom from motorbikes.

1.4 Test Methodology

Radiated testing was performed according to the procedures in Public Notice: DA 00-705 Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems and ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing November 21, 2012). I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6 Measurement Uncertainty

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4) for open site 30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 4.98 dB

Note: See ITL Procedure No. PM 198.

2. System Test Configuration

2.1 Justification

On 3/20/13 the product was originally authorized for FCC certification under FCC ID: Q95ER16.

The Class II Permissive Changes to the original product are as follows:

1. Change the layout of the RF area on the board.
2. Replace the AGC microphone amplifier from:
Manufacturer: National, Model: LMC6036 to
Manufacturer: Texas Instruments, Model: OPA2348.

Due to the above changes an application for a C2PC for the FCC is being submitted.

2.2 Special Accessories

No special accessories were needed to achieve compliance.

2.3 Equipment Modifications

No modifications were needed to achieve compliance.

2.4 Configuration of Tested System



Figure 1. Configuration of Tested System

3. Test Setup Photos

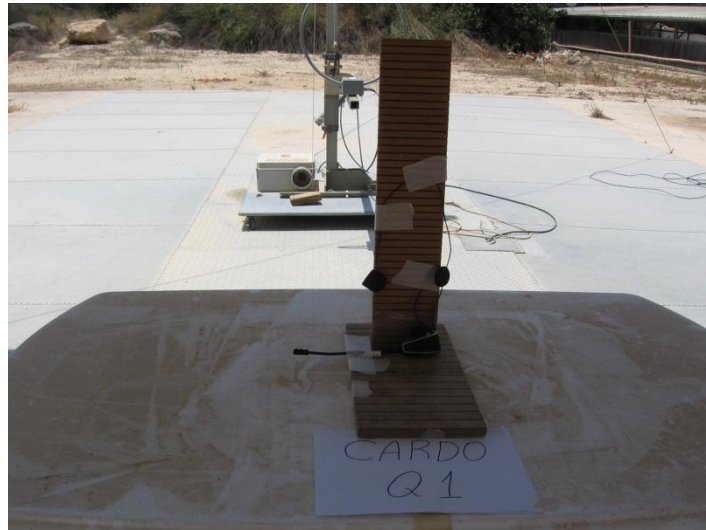


Figure 2 Q1 Radiated Emission 9kHz -30 MHz

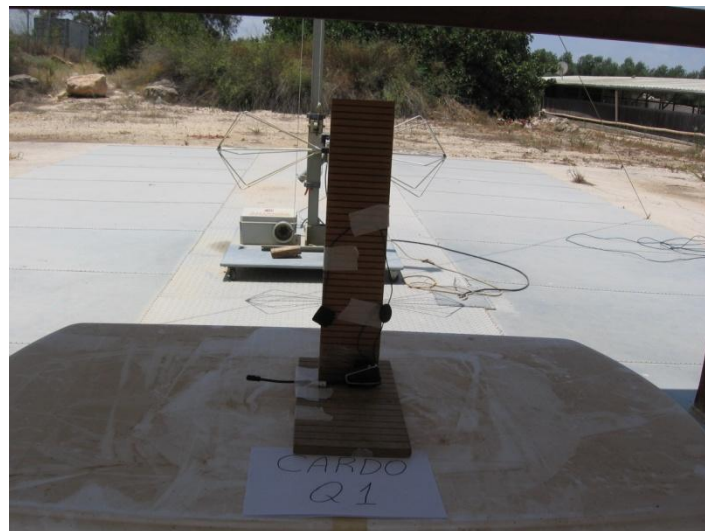


Figure 3 Q1 Radiated Emission 30MHz -300MHz



Figure 4 Q1 Radiated Emission 30 -1000 MHz



Figure 5 Q1 Radiated Emission above 1 GHz

4. Maximum Transmitted Peak Power Output

4.1 Test Specification

FCC Part 15 Section 15.247(b)

4.2 Test procedure

The E.U.T was placed on a non-metallic table, 0.8 meters above the ground plane, on a remote-controlled turntable in the OATS. The test distance was 3 meters.

The transmitter unit operated with normal modulation. The EMI receiver was set to 1 MHz resolution BW. The EUT was set up as shown in Figure 3, and its proper operation was checked.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

The E.U.T. was tested in three operating channels and frequencies (1 (2.402 GHz); 8 (2.441 GHz); 14 (2.480 GHz)).

Radiated output power levels were measured at selected operation frequencies and the results were converted to power level according to the formula as shown below:

$$P = \frac{(E_{V/m} \times d)^2}{(30 \times G)} [W]$$

E - Field Strength (V/m)

d – Distance from transmitter (m)

G – Antenna gain

P – Peak power (W)

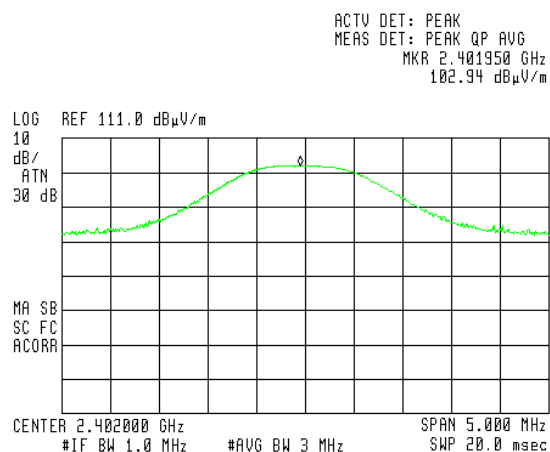


Figure 6 Q1 Low Channel – Vertical

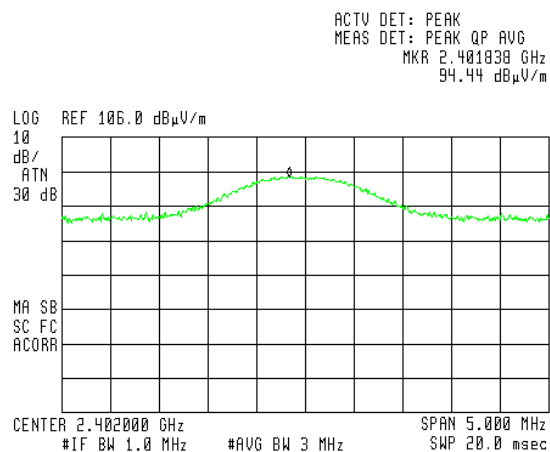


Figure 7 Q1 Low Channel – Horizontal

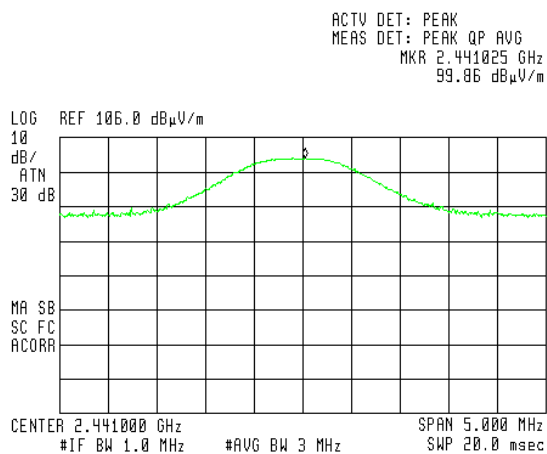


Figure 8 Q1 Mid Channel – Vertical

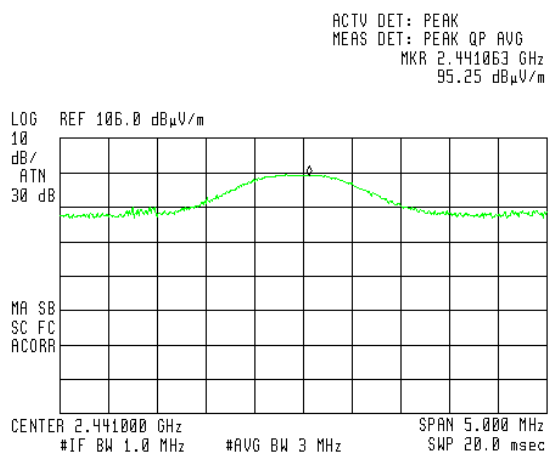


Figure 9 Q1 Mid Channel – Horizontal

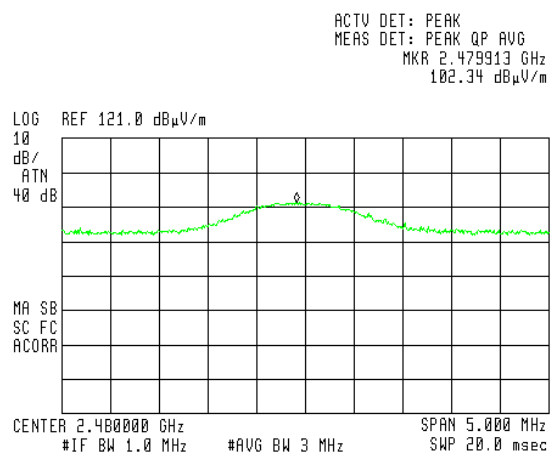


Figure 10 Q1 High Channel – Vertical

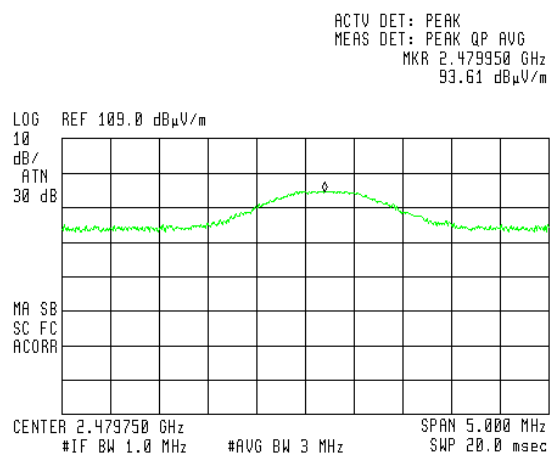


Figure 11 Q1 High Channel – Horizontal


Operation Frequency (MHz)	Unit	Polarization	Field Strength (dBuV/m)	Power (mW)	Specification (mW)	Margin (mW)
Low	Q1	V	102.94	3.68	1000	-996.32
Low	Q1	H	94.44	0.47	1000	-999.53
Mid	Q1	V	99.86	1.88	1000	-998.12
Mid	Q1	H	95.25	0.68	1000	-999.32
High	Q1	V	102.34	3.17	1000	-996.83
High	Q1	H	93.61	0.47	1000	-999.53

Figure 12 Maximum Peak Power Output

See additional details in Figure 6 to Figure 11.

JUDGEMENT: Passed by 996.32mW

TEST PERSONNEL:

Tester Signature: 

Date: 19.11.13

Typed/Printed Name: A. Sharabi



4.1 Test Equipment Used.

Peak Power Output

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 Year
RF Filter Section	HP	85420E	3705A00248	February 26, 2013	1 Year
Antenna Biconical	EMCO	3104	2606	August 30, 2012	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 Year
Horn Antenna	ETS	3115	29845	March 14, 2012	2 Years
Horn Antenna	ARA	SWH-28	1007	January 26, 2011	3 Years
Low Noise Amplifier	Narda	LNA-DBS-0411N313	013	August 21, 2012	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 28, 2012	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2013	1 Year
Spectrum Analyzer	HP	8564E	3442A00275	February 28, 2013	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

Figure 13 Test Equipment Used

5. Band Edge Spectrum

5.1 Test Specification

FCC Part 15 Subpart C Section 15.247(c)

5.2 Test procedure

The E.U.T was placed on a non-metallic table, 0.8 meters above the ground plane, on a remote-controlled turntable in the OATS. The test distance was 3 meters.

The transmitter unit operated with normal modulation. The EMI receiver was set to 1 MHz resolution BW. The EUT was set up as shown in Figure 3, and its proper operation was checked.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. Maximum power level below 2400 MHz and above 2483.5 MHz was measured relative to power level at 2402 MHz, and 2480 MHz correspondingly.

5.3 Test Results

Model #	Operation Frequency (MHz)	Band Edge Frequency (MHz)	Spectrum Level (dBuV/m)	Specification (dBuV/m)	Margin (dB)
Q1	2402	2400.00	55.98	83.0	-27.02
Q1	2480	2483.5	65.67	82.2	-16.53

Figure 14 Band Edge Spectrum

See additional details in Figure 15 to Figure 16.

JUDGEMENT:

Passed by 16.53dB

TEST PERSONNEL:

Tester Signature: 

Date: 19.11.13

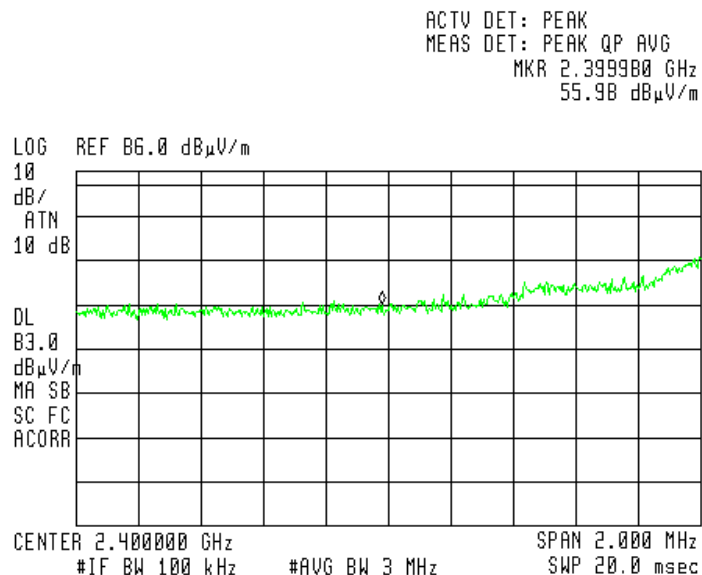


Figure 15 — Q1 Low Channel – Vertical

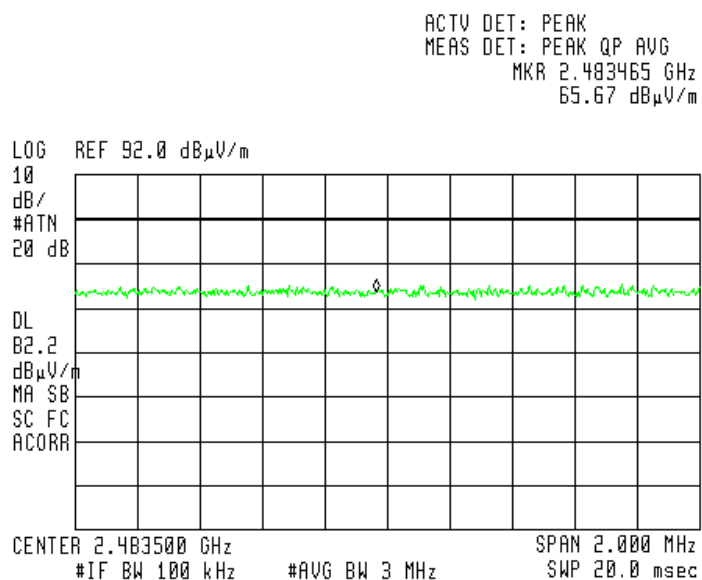


Figure 16 — Q1 High Channel – Vertical

5.4 Band Edge Spectrum Test Equipment Used.

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 Year
RF Filter Section	HP	85420E	3705A00248	February 26, 2013	1 Year
Antenna Biconical	EMCO	3104	2606	August 30, 2012	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 Year
Horn Antenna	ETS	3115	29845	March 14, 2012	2 Years
Horn Antenna	ARA	SWH-28	1007	January 26, 2011	3 Years
Low Noise Amplifier	Narda	LNA-DBS-0411N313	013	August 21, 2012	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 28, 2012	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2013	1 Year
Spectrum Analyzer	HP	8564E	3442A00275	February 28, 2013	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

Figure 17 Band Edge Spectrum Test Equipment Used

6. Radiated Emission, 9 kHz – 30 MHz

6.1 Test Specification

9 kHz-30 MHz, FCC, Part 15, Subpart C, Section 209

6.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-30 MHz was scanned.

The emissions were measured using a computerized EMI receiver complying with CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter at a distance of 3 meters.

The E.U.T. was tested at the operating frequencies of 2402, 2441, and 2480 MHz.

6.3 Measured Data

JUDGEMENT: Passed

The EUT met the requirements of the F.C.C. Part 15, Subpart C, Section 209 specification.

The results for all three operating frequencies were the same.

The signals in the band 9 kHz – 30 MHz were below the spectrum analyzer noise level, at least 20 dB below the specification limit.

TEST PERSONNEL:

Tester Signature: 

Date: 19.11.13

Typed/Printed Name: A. Sharabi

6.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 year
RF Section	HP	85420E	3705A00248	February 26, 2013	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 21, 2012	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

6.5 Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS: Field Strength [dB μ V/m]
 RA: Receiver Amplitude [dB μ V]
 AF: Receiving Antenna Correction Factor [dB/m]
 CF: Cable Attenuation Factor [dB]

Example: $FS = 30.7 \text{ dB}\mu\text{V (RA)} + 14.0 \text{ dB (AF)} + 0.9 \text{ dB (CF)} = 45.6 \text{ dB}\mu\text{V}$

No external pre-amplifiers are used.

7. Spurious Radiated Emission 30 – 1000 MHz

7.1 Test Specification

30 MHz-1000 MHz, F.C.C., Part 15, Subpart C

7.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 1.

The frequency range 30 MHz-1000 MHz was scanned, and the list of the highest emissions was verified and updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

The emissions were measured using a computerized EMI receiver complying with CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 30-1000 MHz, the readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods:

- Turning the E.U.T on and off.

- Using a frequency span less than 10 MHz.

- Observation of the signal level during turntable rotation. Background noise is not affected by the rotation of the E.U.T.

The E.U.T. was tested at the operating frequencies of 2402, 2441, and 2480 MHz.



7.3 **Test Data**

JUDGEMENT: Passed

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification.
The results for all three operating frequencies were the same.

The signals in the band 30 MHz – 1.0 GHz were below the spectrum analyzer noise level, at least 20 dB below the specification limit.

TEST PERSONNEL:

Tester Signature: _____

Date: 19.11.13

Typed/Printed Name: A. Sharabi

7.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 year
RF Section	HP	85420E	3705A00248	February 26, 2013	1 year
Antenna Biconical	EMCO	3104	2606	August 30, 2013	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

7.5 Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$[\text{dB}\mu\text{V/m}] \text{ FS} = \text{RA} + \text{AF} + \text{CF}$$

FS: Field Strength [dB μ V/m]
RA: Receiver Amplitude [dB μ V]
AF: Receiving Antenna Correction Factor [dB/m]
CF: Cable Attenuation Factor [dB]

Example: FS = 30.7 dB μ V (RA) + 14.0 dB (AF) + 0.9 dB (CF) = 45.6 dB μ V

No external pre-amplifiers are used.

8. Spurious Radiated Emission Above 1 GHz

8.1 Radiated Emission Above 1 GHz

The E.U.T operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

In the frequency range 1-2.9 GHz, a computerized EMI receiver complying with CISPR 16 requirements was used.

In the frequency range 2.9-25.0 GHz, a spectrum analyzer including a low noise amplifier was used. During average measurements, the IF bandwidth was 1 MHz and the video bandwidth was 100Hz. During peak measurements, the IF bandwidth was 1 MHz and the video bandwidth was 3 MHz.

The test distance was 3 meters.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The E.U.T. was tested at the operating frequencies of 2402, 2441, and 2480 MHz.

8.2**Test Data**

JUDGEMENT: Passed by 6.1 dB

For the operation frequency of 2402 MHz, the margin between the emission level and the specification limit is 7.1 dB in the worst case at the frequency of 2390 MHz, vertical polarization.

For the operation frequency of 2441 MHz, the margin between the emission level and the specification limit is 14.0 dB in the worst case at the frequency of 4882 MHz, vertical polarization.


For the operation frequency of 2480 MHz, the margin between the emission level and the specification limit is 6.1 dB in the worst case at the frequency of 2483.50 MHz, vertical polarization.

The results for all modulations were the same.

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification.

The details of the highest emissions are given in Figure 18 to Figure 23.

TEST PERSONNEL:

Tester Signature: 

Date: 19.11.13

Typed/Printed Name: A. Sharabi

Radiated Emission Above 1 GHz

E.U.T Description Bluetooth Headset
Type Scala Rider Q1
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
Test Distance: 3 meters Detector: Peak
Operation Frequency: 2402 MHz

Freq.	Polarity	Peak Amp	Peak. Specification	Peak. Margin
(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
2390.00	H	58.9	74.0	-15.1
2390.00	V	59.5	74.0	-14.5
4804.00	H	54.4	74.0	-19.6
4804.00	V	55.7	74.0	-18.1

**Figure 18. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Peak**

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

** “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain + Band Pass Filter

Radiated Emission Above 1 GHz

E.U.T Description Bluetooth Headset
Type Scala Rider Q1
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
Test Distance: 3 meters Detector: Average
Operation Frequency: 2402 MHz

Freq.	Polarity	Average Amp	Average. Specification	Average Margin
(MHz)	(H/V)	(dBμV/m)	(dB μV/m)	(dB)
2390.00	H	46.3	54.0	-7.7
2390.00	V	46.9	54.0	-7.1
4804.00	H	39.1	54.0	-14.9
4804.00	V	39.6	54.0	-14.4

**Figure 19. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

- * “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain
- ** “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain + Band Pass Filter

Radiated Emission Above 1 GHz

E.U.T Description Bluetooth Headset
Type Scala Rider Q1
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
Test Distance: 3 meters Detector: Peak
Operation Frequency: 2441 MHz

Freq.	Polarity	Peak Amp	Peak. Specification	Peak. Margin
(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
4882.00	H	55.0	74.0	-19.0
4882.00	V	56.7	74.0	-17.3

Figure 20. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Peak

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

“Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain + Band Pass Filter

Radiated Emission Above 1 GHz

E.U.T Description Bluetooth Headset
Type Scala Rider Q1
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
Test Distance: 3 meters Detector: Average
Operation Frequency: 2441 MHz

Freq.	Polarity	Avg Amp	Average Specification	Avg Margin
(MHz)	(H/V)	(dBμV/m)	(dB μV/m)	(dB)
4882.00	H	38.7	54.0	-15.3
4882.00	V	40.0	54.0	-14.0

**Figure 21. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

“Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain + Band Pass Filter

Radiated Emission Above 1 GHz

E.U.T Description Bluetooth Headset
Type Scala Rider Q1
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
Test Distance: 3 meters Detector: Peak
Operation Frequency: 2480 MHz

Freq.	Polarity	Peak Amp	Peak. Specification	Peak. Margin
(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
2483.50	H	58.8	74.0	-15.2
2483.50	V	59.3	74.0	-14.7
4960.00	H	54.6	74.0	-19.4
4960.00	V	55.9	74.0	-18.1

**Figure 22. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Peak**

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

** “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain + Band Pass Filter

Radiated Emission Above 1 GHz

E.U.T Description Bluetooth Headset
Type Scala Rider Q1
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
Test Distance: 3 meters Detector: Average
Operation Frequency: 2480 MHz

Freq.	Polarity	Avg Amp	Average Specification	Avg Margin
(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
2483.50	H	45.0	54.0	-9.0
2483.50	V	47.9	54.0	-6.1
4960.00	H	39.4	54.0	-14.6
4960.00	V	40.5	54.0	-13.5

**Figure 23. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

** “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain + Band Pass Filter



8.3 Test Instrumentation Used, Radiated Measurements Above 1 GHz

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 Year
RF Filter Section	HP	85420E	3705A00248	February 26, 2013	1 Year
Antenna Biconical	EMCO	3104	2606	August 30, 2013	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 Year
Double Ridged Waveguide Horn Antenna	EMCO	3115	29845	March 14, 2012	2 Years
Horn Antenna	ARA	SWH-28	1008	January 26, 2011	3 Years
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	August 21, 2013	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 28, 2013	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2013	1 Year
Spectrum Analyzer	HP	8546E	3442A00275	February 28, 2013	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A



9. Antenna Gain/Information

Integral, 2dBi

10. R.F Exposure/Safety

Typical use of the E.U.T. is as a Bluetooth headset. The typical placement of the E.U.T. is on the outside of a motorcycle helmet. The distance between the E.U.T. and the user is 3 cm.

Per information from the customer:

As written in the Bluetooth standard – CORE 3.0+HS- the maximum SCO channels that could be activated on a single Bluetooth product is 3.

At Cardo's Qline tested products, only one SCO channel is used when communicating between headsets. Every SCO channel is 1/3 of time, and on each channel, every unit transmits half of the time, because every channel consists of two participants (voice transfer), every unit is on Tx the 1/6 part of the time, which is 16.66%. So the theoretical maximum duty cycle is 16.66%, effectively, is less, due to Tx and Rx and Rx to Tx transfer time.

Calculation of Maximum Permissible Exposure (MPE)

Based on Section 1.1310 Requirements

(a) FCC limits at 2402 MHz is: $1 \frac{mW}{cm^2}$

Using table 1 of Section 1.1310 limit for general population/uncontrolled exposures, the above level is an average over 30 minutes.

(b) The power density produced by the E.U.T. is

$$S = \frac{P_t G_t}{4\pi R^2}$$

P_t- Transmitted Power = 102.94 dBuVm(Peak) = 3.68 mW

G_T- Antenna Gain = 2dBi= 1.6 numeric

R- Distance from Transmitter = 3 cm

(c) The peak power density is:

$$S_p = \frac{3.68 \times 1.6}{4\pi(3)^2} = 0.05 \frac{mW}{cm^2}$$

(d) This is below the FCC limit.



EUT

11. APPENDIX A - CORRECTION FACTORS

11.1 Correction factors for CABLE

from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

11.2 Correction factors for CABLE

from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

NOTES:

1. The cable type is RG-8.
2. The overall length of the cable is 10 meters.

11.3 Correction factors for CABLE

from spectrum analyzer
to test antenna above 2.9 GHz

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

NOTES:

1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.
2. The cable is used for measurements above 2.9 GHz.
3. The overall length of the cable is 10 meters.

12.6 Correction factors for LOG PERIODIC ANTENNA

Type LPD 2010/A at 3 and 10 meter ranges.

Distance of 3 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

Distance of 10 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.0
250.0	10.1
300.0	11.8
400.0	15.3
500.0	15.6
600.0	18.7
700.0	19.1
800.0	20.2
900.0	21.1
1000.0	23.2

NOTES:

1. Antenna serial number is 1038.
2. The above lists are located in file number 38M30.ANT for a 3 meter range, and file number 38M100.ANT for a 10 meter range.
3. The files mentioned above are located on the disk marked "Radiated Emission Test EMI Receiver".

11.4 Correction factors for

Antenna Biconical Type 3104 at 3 meter range.

FREQUENCY	ANTENNA FACTOR
(GHz)	(dB)
30	14.8
40	13.4
50	11.8
60	11.0
70	9.1
80	8.1
90	12.4
100	13.9
120	13.7
140	12.5
160	15.1
180	16.5
200	16.4
250	18.6
300	20.6

NOTE:

Antenna serial number is 2606.



11.6 Correction factors for Double-Ridged Waveguide Horn

**Model: 3115, S/N 29845
at 3 meter range.**

FREQUENCY	ANTENNA	ANTENNA	FREQUENCY	ANTENNA	ANTENNA
(GHz)	FACTOR	Gain	(GHz)	FACTOR	Gain
	(dB 1/m)	(dBi)		(dB 1/m)	(dBi)
1.0	24.8	5.4	10.0	38.8	11.4
1.5	26.1	7.6	10.5	38.9	11.8
2.0	28.6	7.7	11.0	39.0	12.1
2.5	29.8	8.4	11.5	39.6	11.8
3.0	31.4	8.4	12.0	39.8	12.0
3.5	32.4	8.7	12.5	39.6	12.5
4.0	33.7	8.6	13.0	40.0	12.5
4.5	33.4	9.9	13.5	39.8	13.0
5.0	34.5	9.7	14.0	40.2	13.0
5.5	35.1	9.9	14.5	40.6	12.9
6.0	35.4	10.4	15.0	41.3	12.4
6.5	35.6	10.8	15.5	39.5	14.6
7.0	36.2	10.9	16.0	38.8	15.5
7.5	37.3	10.4	16.5	40.0	14.6
8.0	37.7	10.6	17.0	41.4	13.4
8.5	38.3	10.5	17.5	44.8	10.3
9.0	38.5	10.8	18.0	47.2	8.1
9.5	38.7	11.1			

11.7 Correction factors for

Horn Antenna
Model: SWH-28
at 1 meter range.

FREQUENCY (GHz)	AFE (dB /m)	Gain (dB1)
18.0	40.3	16.1
19.0	40.3	16.3
20.0	40.3	16.1
21.0	40.3	16.3
22.0	40.4	16.8
23.0	40.5	16.4
24.0	40.5	16.6
25.0	40.5	16.7
26.0	40.6	16.4



11.8 Correction factors for ACTIVE LOOP ANTENNA
Model 6502
S/N 9506-2950

FREQUENCY	Magnetic Antenna Factor	Electric Antenna Factor
(MHz)	(dB)	(dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2