



ISRAEL TESTING LABORATORIES
Global Certifications You Can Trust



DATE: 21 December 2014

I.T.L. (PRODUCT TESTING) LTD.

FCC Radio Test Report

for

Cardo Peripheral Systems

Equipment under test:

Rider Communication System

**scala rider PACKTALK
2.4 GHz Bluetooth
(standard, EDR)**

Approved by: _____

M. Zohar, Test Engineer

Approved by: _____

I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.



Measurement/Technical Report for Cardo Peripheral Systems Rider Communication System

scala rider PACKTALK

FCC ID: Q95ER19

IC: 4668A-ER19

This report concerns: Original Grant: X
Class I Change:
Class II Change:

Equipment type: Spread Spectrum Transmitter

Limits used: 47CFR15 Section 15.247

Measurement procedure used is Public Notice: DA 00-705 Filing and
Measurement Guidelines for Frequency Hopping Spread Spectrum Systems and
ANSI C63.4-2003.

Application for Certification
prepared by:
R. Pinchuck
ITL (Product Testing) Ltd.
1 Bat Sheva St.
Lod 7116002
Israel
e-mail Rpinchuck@itl.co.il

Applicant for this device:
(different from "prepared by")
Avi Moato
Cardo Peripheral Systems
13 Hamifal St.,
Or Yehuda, 60221, Israel
Tel: +972-3-735-3111
Fax: +972-3562-3360
e-mail: moato@cardosystems.com

TABLE OF CONTENTS

1.	GENERAL INFORMATION	5
1.1	Administrative Information	5
1.2	List of Accreditations	6
1.3	Product Description	7
1.4	Test Methodology	7
1.5	Test Facility	7
1.6	Measurement Uncertainty	7
2.	SYSTEM TEST CONFIGURATION	8
2.1	Justification	8
2.2	EUT Exercise Software	8
2.3	Special Accessories	8
2.4	Equipment Modifications	8
2.5	Configuration of Tested System	8
3.	RADIATED MEASUREMENT TEST SET-UP PHOTO	9
4.	AVG. FACTOR CALCULATION	11
4.1	Standard BT Modulation	11
4.2	EDR BT modulation	13
5.	26DB BANDWIDTH	15
5.1	Test Specification	15
5.2	Test procedure	15
5.3	Test Results	19
5.4	Test Equipment Used, 26 dB Bandwidth	20
6.	20DB BANDWIDTH	21
6.1	Test Specification	21
6.2	Test procedure	21
6.3	Test Results	25
6.4	Test Equipment Used; 20dB Bandwidth	26
7.	NUMBER OF HOPPING FREQUENCIES SECTION 15.247(A)(1)(III)	27
8.	CHANNEL FREQUENCY SEPARATION	34
8.1	Test Specification	34
8.4	Test Instrumentation Used; Channel Frequency Separation	37
9.	RADIATED POWER OUTPUT	38
9.1	Test Specification	38
9.2	Test procedure	38
9.3	Results Calculation	48
9.4	Test Equipment Used, Radiated Maximum Power Output	49
10.	DWELL TIME ON EACH CHANNEL	50
10.1	Test Specification	50
10.2	Test Procedure	50
10.3	Test Equipment Used; Dwell Time	53
11.	BAND EDGE	54
11.1	Test procedure	54
11.2	Results table	58
11.3	Test Equipment Used, Band Edge Spectrum	59
12.	RADIATED EMISSION, 9 KHZ – 30 MHZ	60
12.1	Test Specification	60
12.2	Test Procedure	60
12.3	Measured Data	60
12.4	Test Instrumentation Used, Radiated Measurements	61
12.5	Field Strength Calculation	62



13.	SPURIOUS RADIATED EMISSION 30 – 25000 MHZ -----	63
13.1	Test Specification.....	63
13.2	Test Procedure.....	63
13.3	Test Data.....	64
	Test Instrumentation Used; Radiated Measurements.....	71
13.4	Field Strength Calculation 30 – 1000 MHz	72
14.	ANTENNA GAIN/INFORMATION-----	73
15.	R.F EXPOSURE/SAFETY-----	74
16.	APPENDIX B - CORRECTION FACTORS -----	75
16.1	Correction factors for CABLE.....	75
16.2	Correction factors for CABLE.....	76
16.3	Correction factors for CABLE.....	77
16.4	Correction factors for Bilog ANTENNA	78
16.5	Correction factors for Horn ANTENNA.	79
16.6	Correction factors for LOG PERIODIC ANTENNA	80
16.7	Correction factors for Double-Ridged Waveguide Horn	81
16.8	Correction factors for Horn Antenna	82
16.9	Correction factors for ACTIVE LOOP ANTENNA	83
17.	COMPARISON INDUSTRY CANADA REQUIREMENTS WITH FCC-----	84



1. General Information

1.1 Administrative Information

Manufacturer:	Cardo Peripheral Systems
Manufacturer's Address:	13 Hamifal St., Or Yehuda, 60221 Israel Tel: +972-3-735-3111 Fax: +972-3562-3360
Manufacturer's Representative:	Avi Moato
Equipment Under Test (E.U.T):	Rider Communication System
Equipment Model No.:	scala rider PACKTALK
Equipment Serial No.:	Not Designated
Date of Receipt of E.U.T:	16.11.2014
Start of Test:	16.11.2014
End of Test:	20.11.2014
Test Laboratory Location:	I.T.L (Product Testing) Ltd. 1 Batsheva St., Lod ISRAEL 7120101
Test Specifications:	FCC Part 15 Sub-Part C RSS-210, Issue 8, 2010



1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), FCC Designation No. US1004.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025A-1.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 Product Description

Communication and entertainment system for motorcycle helmets.

The scala rider PACKTALK offers the following key features:

Intercom Options

Multiple Device Connectivity

Entertainment Options

Cardo community and Cardo SmartSet APP

Advanced Technology

1.4 Test Methodology

Both conducted and radiated testing was performed according to the procedures in Public Notice: DA 00705 Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems and ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

Radiated emissions tests were performed at I.T.L.'s testing facility in Lod, Israel. I.T.L.'s EMC Laboratory is accredited by A2LA, certificate No. 1152.01 and its FCC Designation Number is US1004.

1.6 Measurement Uncertainty

Radiated Emission

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4) for open site 30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 4.98 dB

Note: See ITL Procedure No. PM 198.

2. System Test Configuration

2.1 Justification

Unit was tested at installation position, transmitting continuously at the low channel (2402MHz) the middle channel (2441MHz) and the high channel (2480MHz), modulated with two types of modulations: standard Bluetooth modulation and Extended Data Rate modulation.

2.2 EUT Exercise Software

No special exercise software was used.

2.3 Special Accessories

No special accessories were needed to achieve compliance.

2.4 Equipment Modifications

No modifications were needed to achieve compliance.

2.5 Configuration of Tested System



Figure 1. Configuration of Tested System

3. Radiated Measurement Test Set-up Photo



Figure 2. Radiated Emission Test



Figure 3. Radiated Emission Test

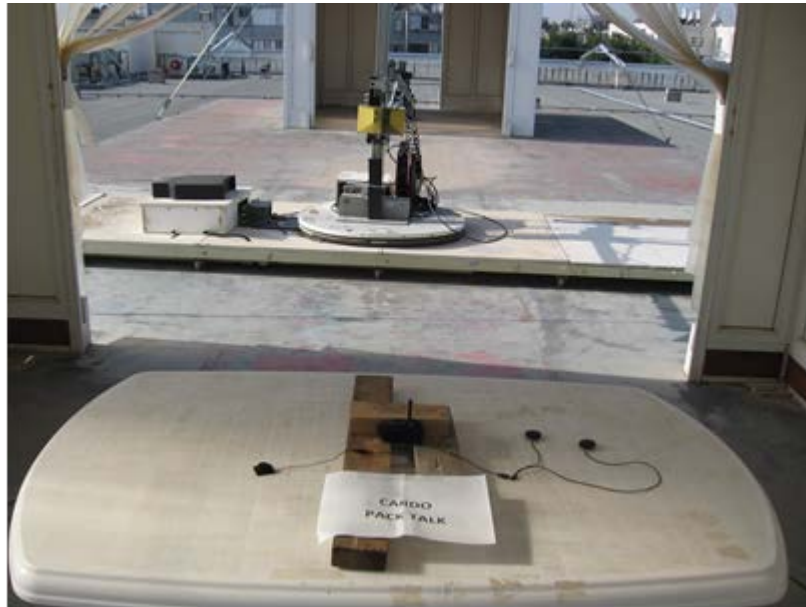


Figure 4. Radiated Emission Test

4. Avg. Factor Calculation

4.1 Standard BT Modulation

1. Pulse period = 1 (worst scenario)
2. Pulse duration = 1 (worst scenario)
3. Burst duration = 0.4msec
4. Time between bursts = 1.28msec

$$5. \text{ Average Factor} = 20 \log \left[\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{burst duration}}{100\text{msec}} \times \text{Num of burst within 100msec} \right]$$

$$\text{Average Factor} = 20 \log \left[1 * \frac{0.4}{100} * 80 \right] = 9.9\text{dB}$$


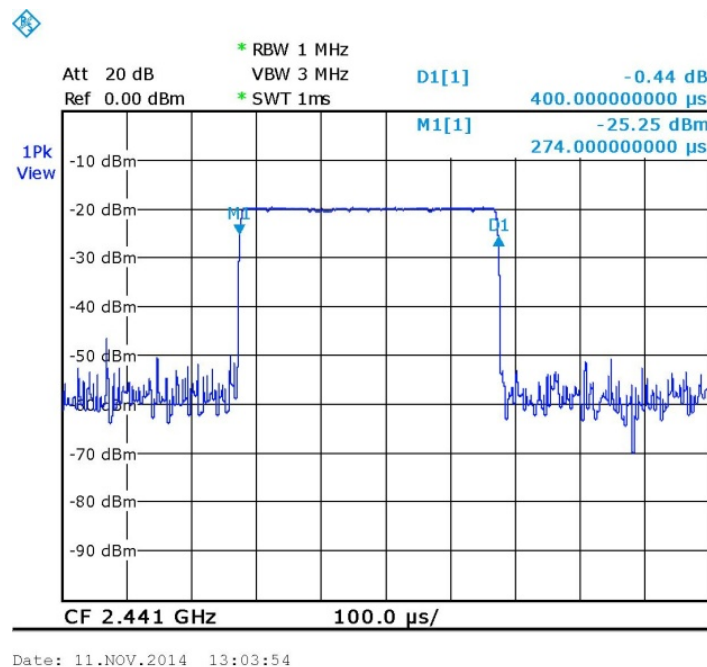


Figure 5. Burst Duration

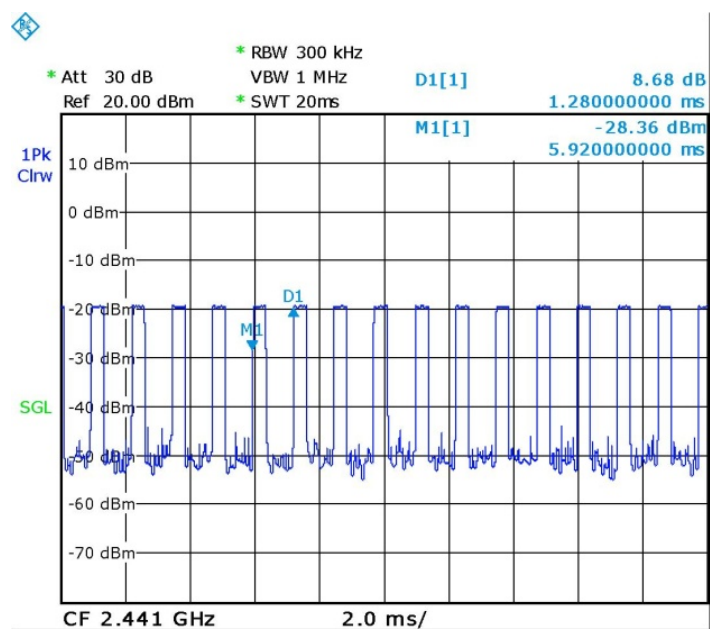

Date: 11.NOV.2014 13:39:35

**Figure 6. Number of bursts in 20msec=16
Number of bursts in 100msec=80**

4.2 EDR BT modulation:

6. Pulse period = 1 (worst scenario)
7. Pulse duration = 1 (worst scenario)
8. Burst duration = 3.0msec
9. Time between bursts = 12.8msec

$$10. \text{Average Factor} = 20 \log \left[\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{burst duration}}{100\text{msec}} \times \text{Num of burst within 100msec} \right]$$

$$\text{Average Factor} = 20 \log \left[1 * \frac{3}{100} * 9 \right] = 11.3\text{dB}$$

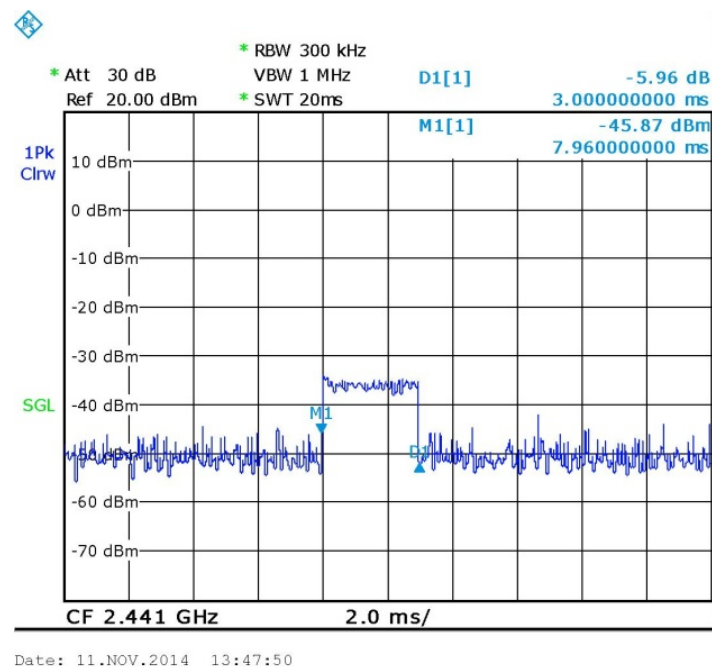


Figure 7. Burst Duration

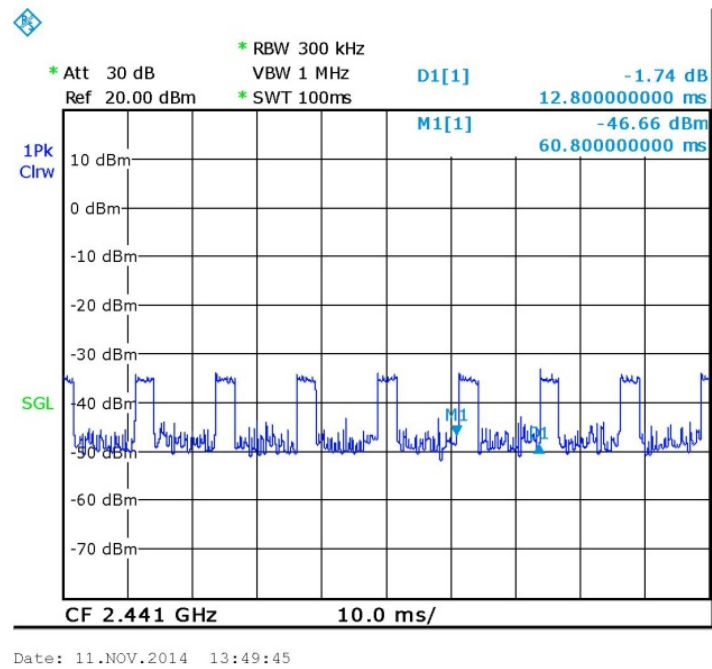


Figure 8. Number of bursts in 100msec=9

5. 26dB Bandwidth

5.1 Test Specification

F.C.C. Part 15, Subpart C: 15.247(a)(2)

5.2 Test procedure

The E.U.T was placed on a non-metallic table, 0.8 meters above the ground plane, on a remote-controlled turntable in the OATS. The test distance was 3 meters. The transmitter unit operated with normal modulation. The EMI receiver was set to 30 kHz resolution BW. The spectrum bandwidth of the transmitter unit was measured and recorded. The test was performed to measure the transmitter occupied bandwidth. The EUT was set up as shown in Figure 3, and its proper operation was checked. The transmitter occupied bandwidth was measured with the EMI receiver as frequency delta between reference points on modulation envelope. The E.U.T. was tested in three frequencies: Low, Mid and High and in 2 modulations: EDR, standard (exterior antenna for worst case).

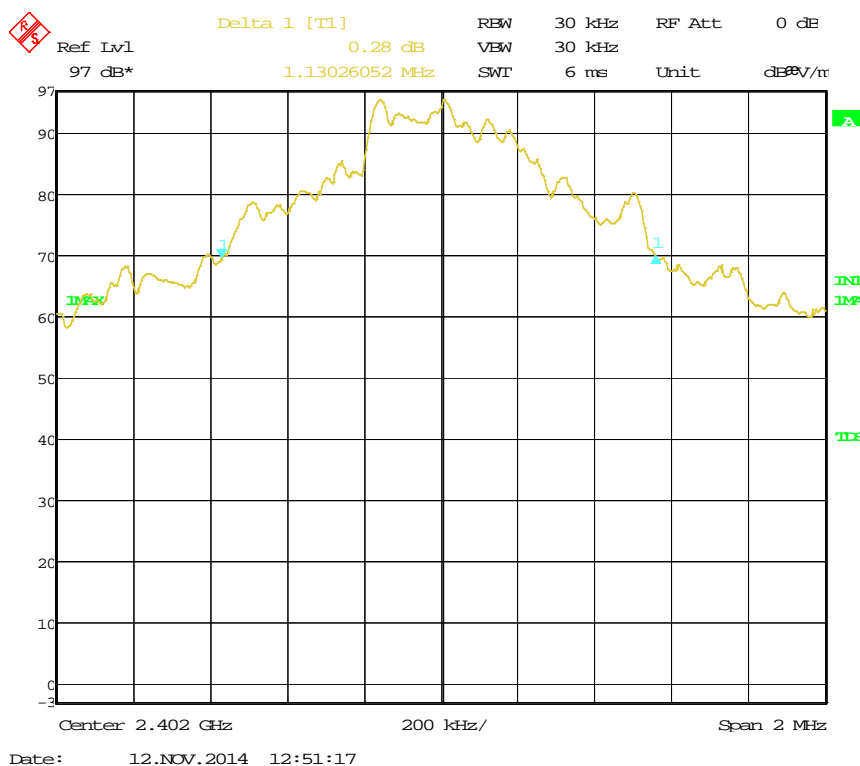


Figure 9. Low Channel, Standard Modulation

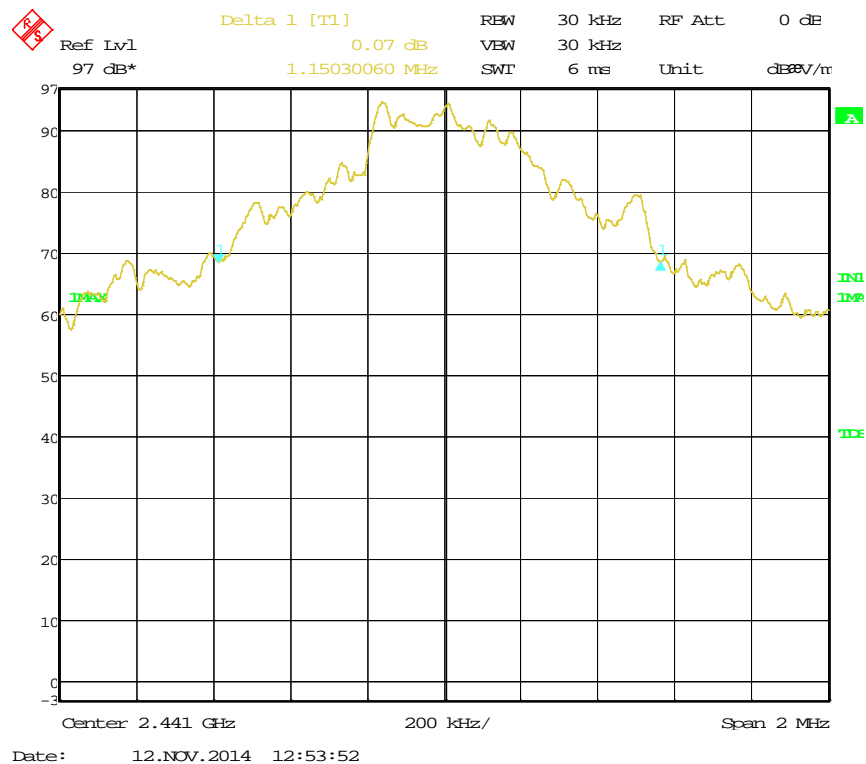


Figure 10. Mid Channel, Standard Modulation

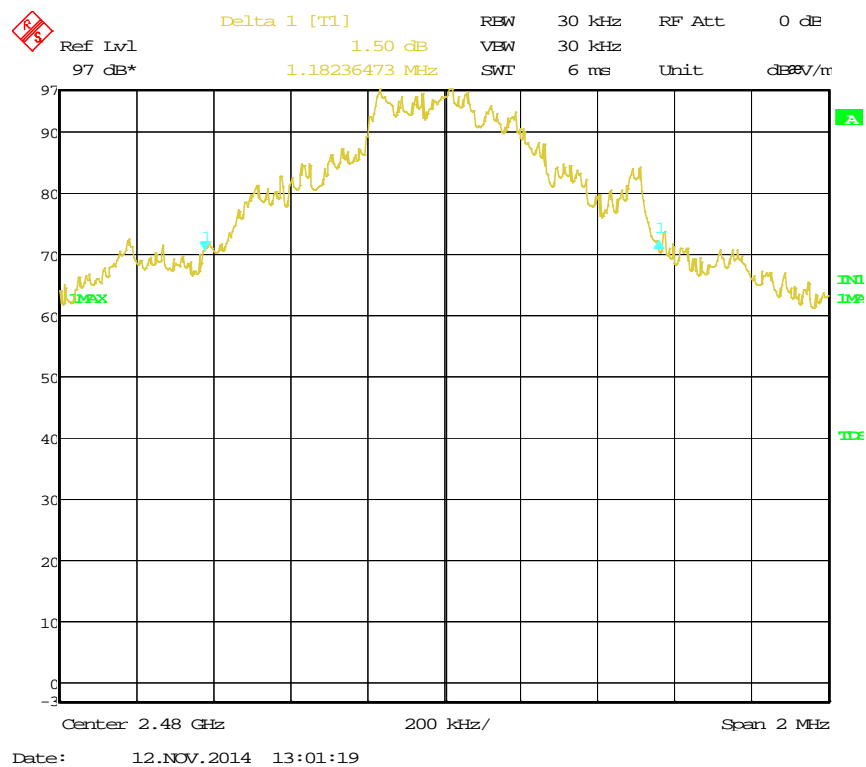


Figure 11. High Channel, Standard Modulation

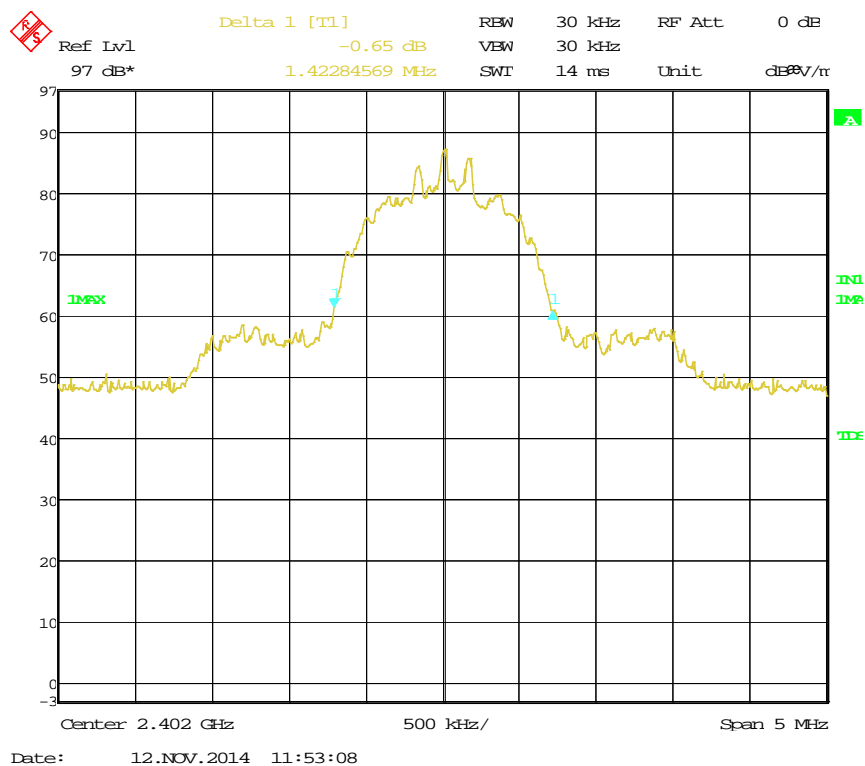


Figure 12. Low Channel, EDR Modulation

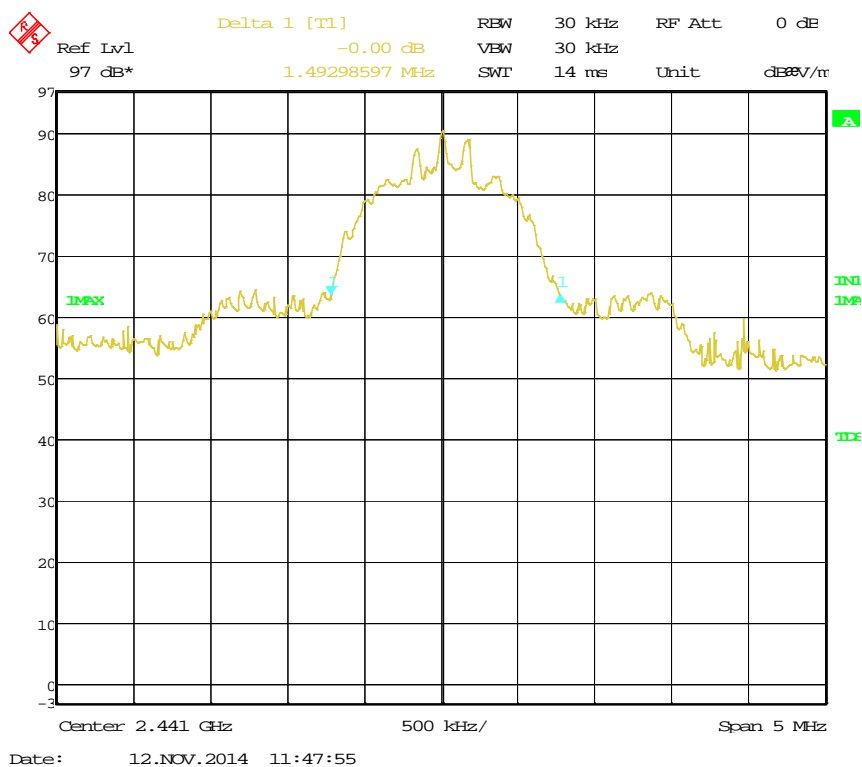


Figure 13. Mid Channel, EDR Modulation

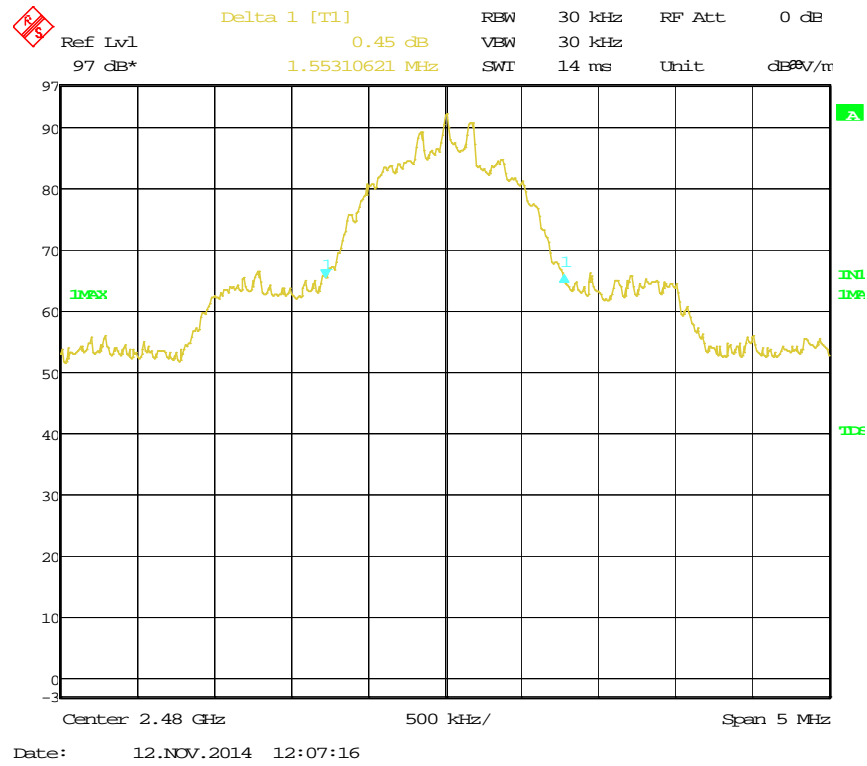


Figure 14. High Channel, EDR Modulation

5.3 Test Results

E.U.T Description: Rider Communication System

Model: scala rider PACKTALK

Serial Number: Not Designated

Operation Frequency (MHz)	Modulation	Bandwidth Reading (MHz)
Low	Standard	1.13
Mid	Standard	1.15
High	Standard	1.18
Low	EDR	1.42
Mid	EDR	1.49
High	EDR	1.55

Figure 15 26 dB Minimum Bandwidth

JUDGEMENT: Passed

TEST PERSONNEL:

Tester Signature:  _____

Date: 31.12.14

Typed/Printed Name: M. Zohar

5.4 Test Equipment Used, 26 dB Bandwidth

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	R&S	ESIB7	100120	December 19, 2013	1 year
Spectrum Analyzer	R&S	FSL6	100194	December 1, 2013	1 year
Active Loop Antenna	EMCO	6502	9506-2950	November 4, 2014	1 year
Biconilog Antenna	EMCO	3142B	1250	May 22, 2014	2 years
Horn Antenna	ETS	3115	6142	March 14, 2012	3 years
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2014	1 year
Spectrum Analyzer	HP	8564E	3442A00275	March 2, 2014	1 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	August 22, 2014	1 year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 29, 2014	1 year
Antenna Mast	ETS	2070-2	9608-1497	N/A	N/A
Turntable	ETS	2087	-	N/A	N/A
Mast & Table Controller	ETS/EMCO	2090	9608-1456	N/A	N/A

Figure 16 Test Equipment Used

6. 20dB Bandwidth

6.1 Test Specification

Specification: FCC Part 15, Subpart C (15.247-a2)

6.2 Test procedure

The E.U.T was placed on a non-metallic table, 0.8 meters above the ground plane, on a remote-controlled turntable in the OATS. The test distance was 3 meters. The transmitter unit operated with normal modulation. The EMI receiver was set to 30 kHz resolution BW. The spectrum bandwidth of the transmitter unit was measured and recorded. The test was performed to measure the transmitter occupied bandwidth. The EUT was set up as shown in Figure 3, and its proper operation was checked. The transmitter occupied bandwidth was measured with the EMI receiver as frequency delta between reference points on modulation envelope. The E.U.T. was tested in three frequencies: Low, Middle and High. And in 2 modulations: EDR, standard (exterior antenna for worst case).

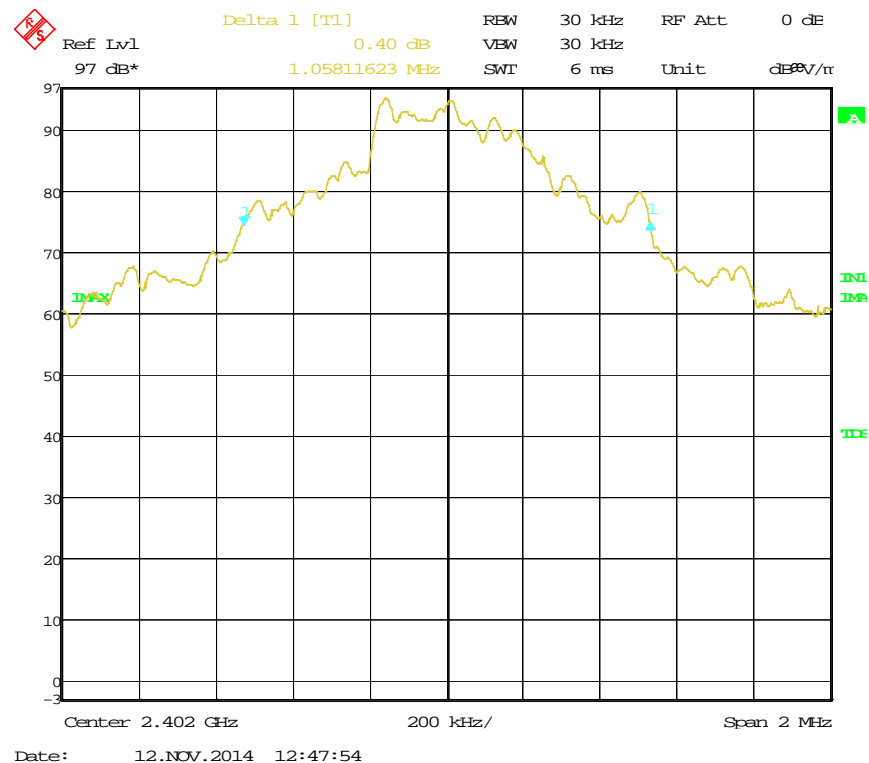


Figure 17. Low Channel, Standard Modulation

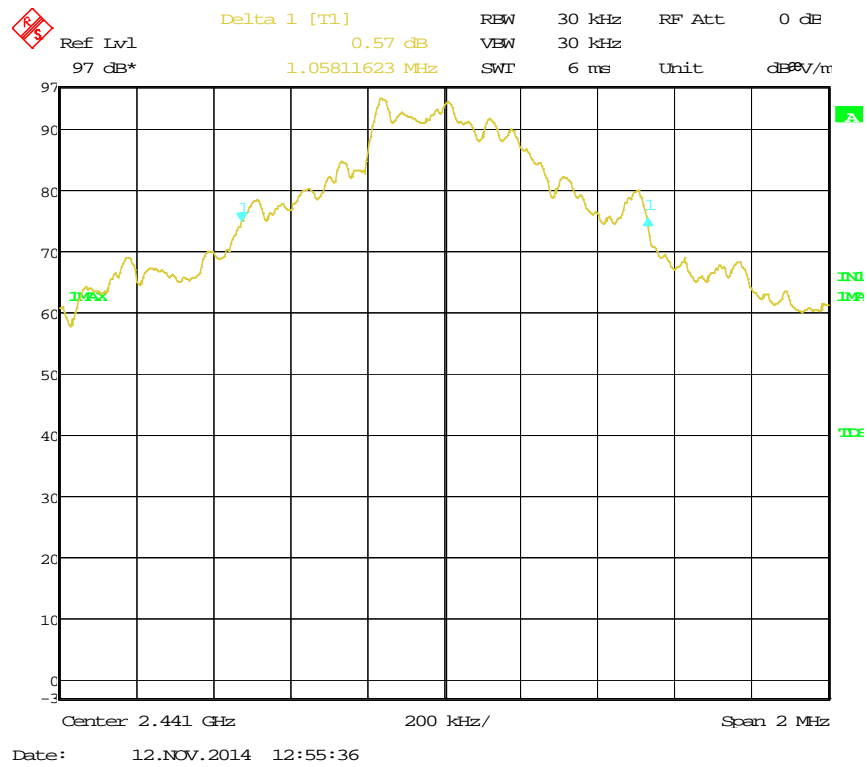


Figure 18. Mid Channel, Standard Modulation

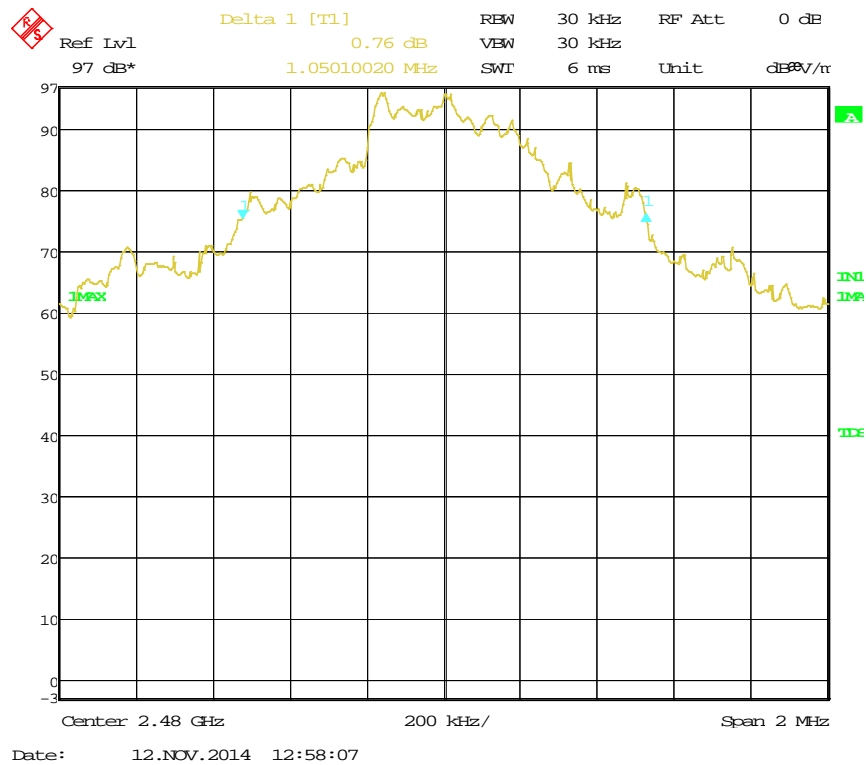


Figure 19. High Channel, Standard Modulation

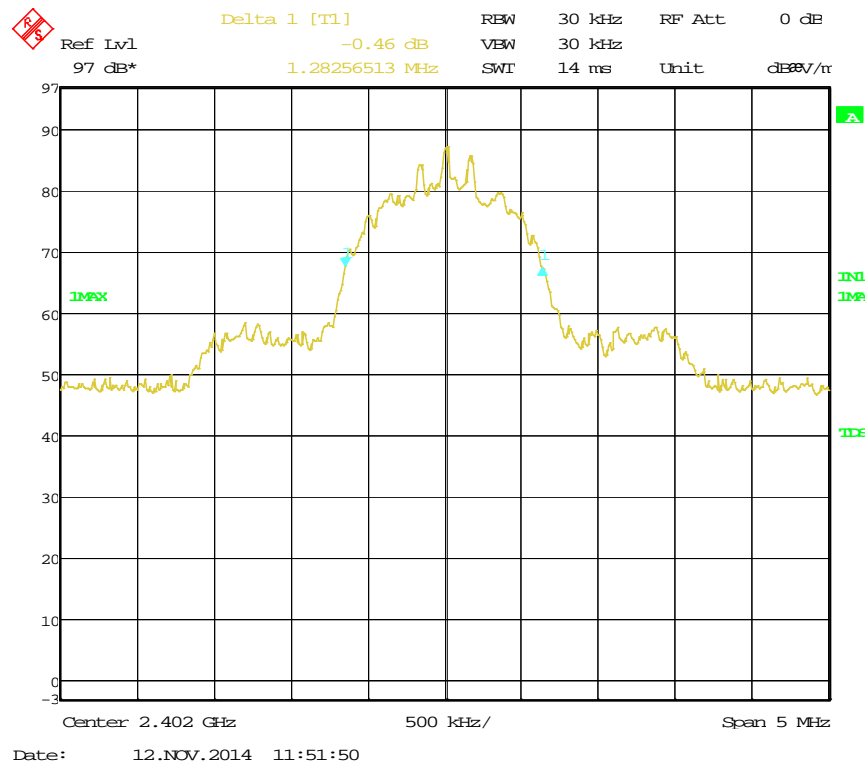


Figure 20. Low Channel, EDR Modulation

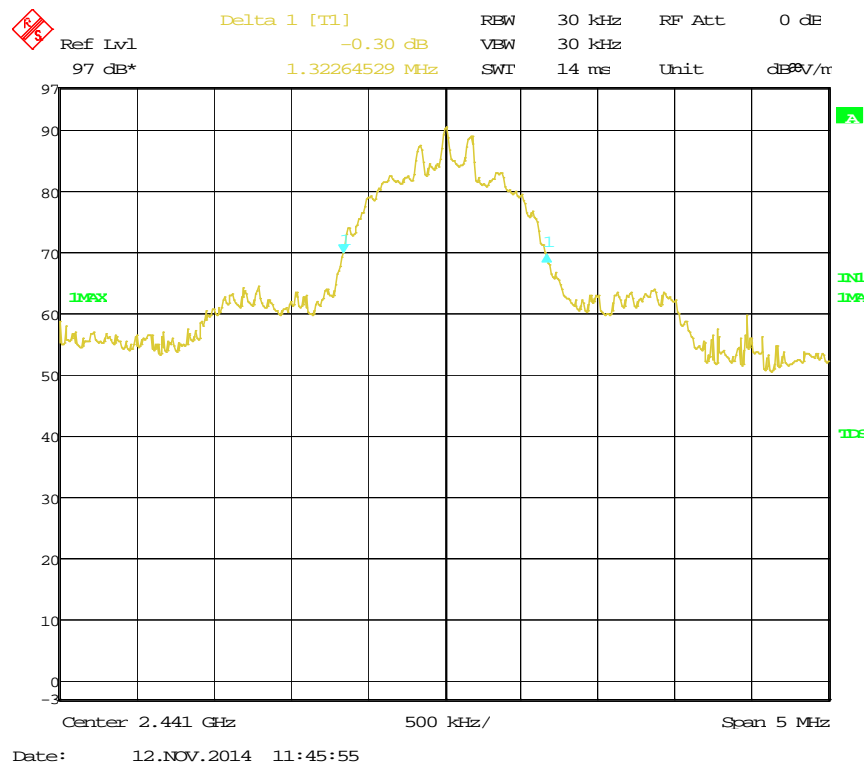


Figure 21. Mid Channel, EDR Modulation

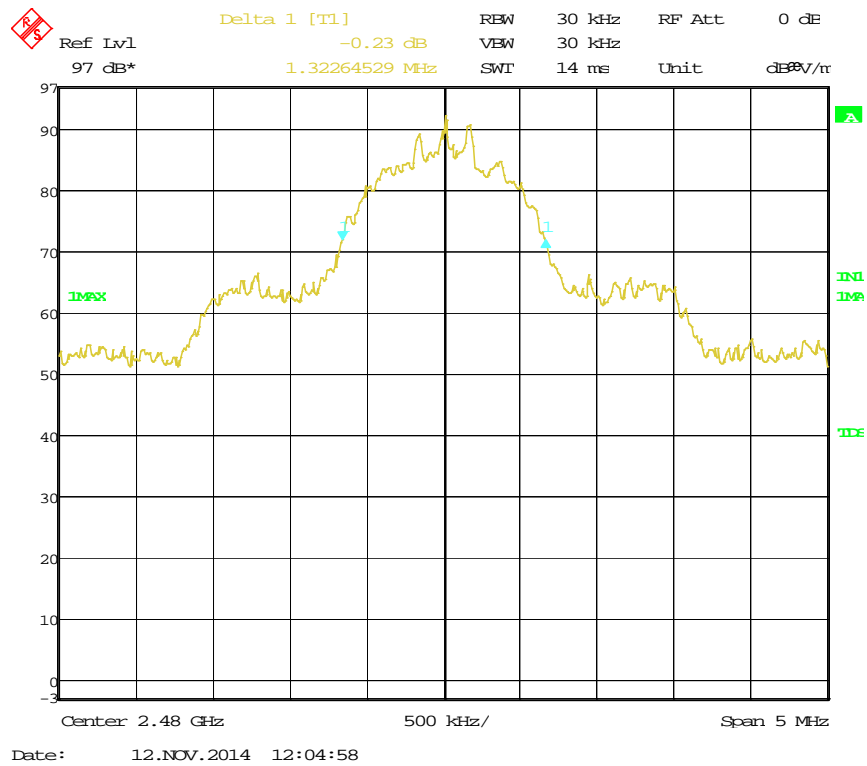


Figure 22. High Channel, EDR Modulation

6.3 Test Results

E.U.T Description: Rider Communication System

Model: scala rider PACKTALK

Serial Number: Not Designated

Operation Frequency (MHz)	Modulation	Bandwidth Reading (MHz)
Low	Standard	1.05
Mid	Standard	1.05
High	Standard	1.05
Low	EDR	1.28
Mid	EDR	1.32
High	EDR	1.32

JUDGEMENT:

Pass

TEST PERSONNEL:

Tester Signature: _____



Date: 31.12.14

Typed/Printed Name: M. Zohar

6.4 Test Equipment Used; 20dB Bandwidth

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	R&S	ESIB7	100120	December 19, 2013	1 year
Spectrum Analyzer	R&S	FSL6	100194	December 1, 2013	1 year
Active Loop Antenna	EMCO	6502	9506-2950	November 4, 2014	1 year
Biconilog Antenna	EMCO	3142B	1250	May 22, 2014	2 years
Horn Antenna	ETS	3115	6142	March 14, 2012	3 years
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2014	1 year
Spectrum Analyzer	HP	8564E	3442A00275	March 2, 2014	1 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	August 22, 2014	1 year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 29, 2014	1 year
Antenna Mast	ETS	2070-2	9608-1497	N/A	N/A
Turntable	ETS	2087	-	N/A	N/A
Mast & Table Controller	ETS/EMCO	2090	9608-1456	N/A	N/A

Figure 23 Test Equipment Used

7. Number of Hopping Frequencies

Section 15.247(a)(1)(iii)

7.1 Test Specification

F.C.C., Part 15, Subpart C

7.2 Test Procedure

The E.U.T. was set to hopping mode.

The spectrum analyzer was set to the following parameters:

Span: Every 20 MHz Frequency

Band of Operation: 2402-2480 MHz

RBW: 30kHz

VBW: 300kHz

Detector Function: Peak


Trace: Maximum Hold

The number of hopping frequencies is 79 (See plots).

The E.U.T was evaluated in 2 modulations: EDR and standard.


Number of Hopping Frequencies

E.U.T Description	Rider Communication System
Type	scala rider PACKTALK
Serial Number:	Not Designated

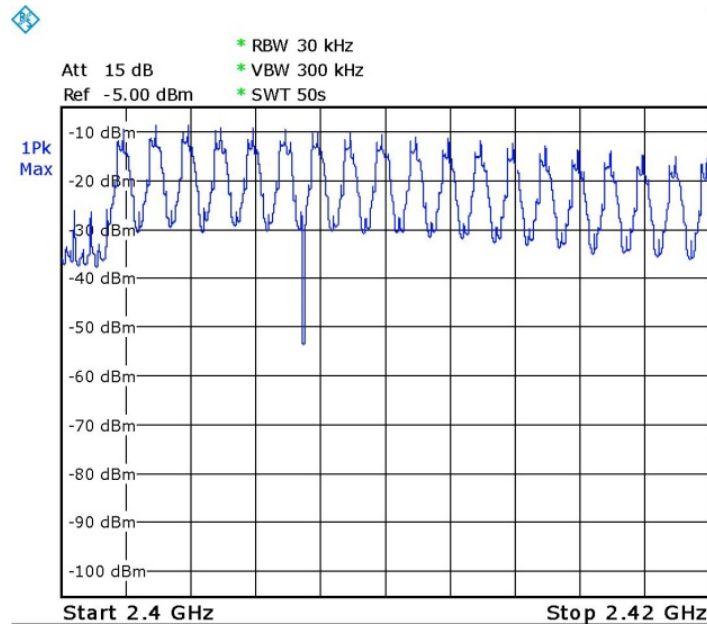

Date: 12.NOV.2014 07:02:09

Figure 24. Frequency Hopping, Standard modulation

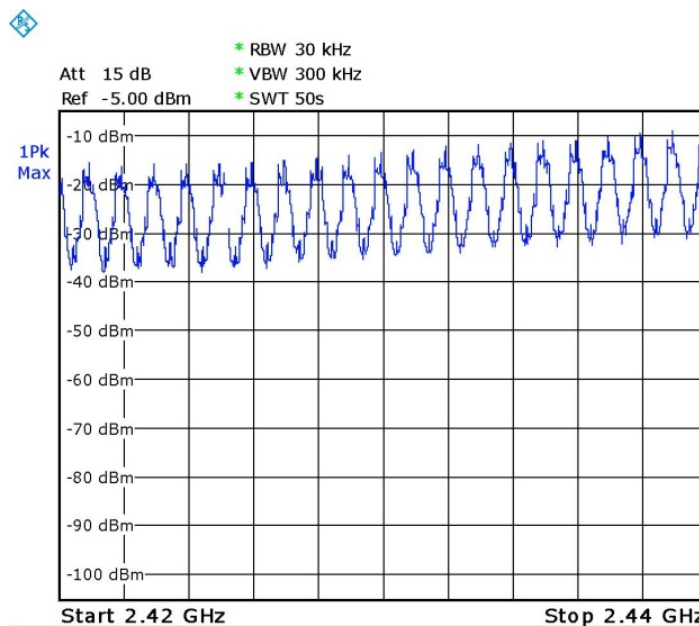

Date: 12.NOV.2014 07:10:11

Figure 25. Frequency Hopping, Standard modulation

Number of Hopping Frequencies

E.U.T Description Rider Communication System
Type scala rider PACKTALK
Serial Number: Not Designated

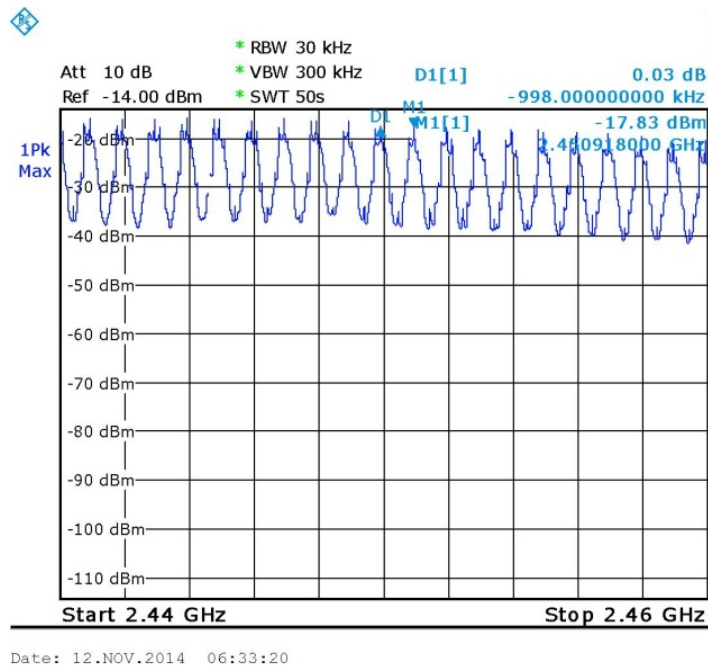


Figure 26. Frequency Hopping, Standard modulation

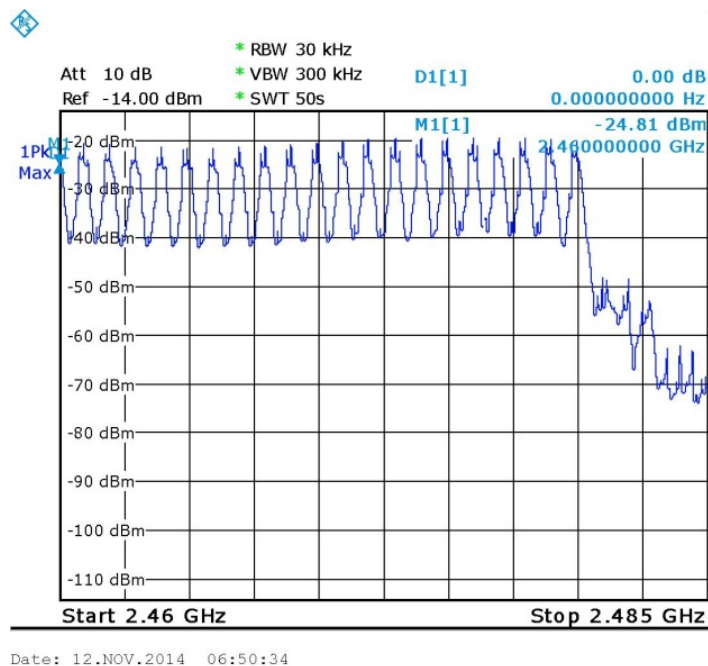


Figure 27. Frequency Hopping, Standard modulation

Number of Hopping Frequencies

E.U.T Description Rider Communication System
Type scala rider PACKTALK
Serial Number: Not Designated

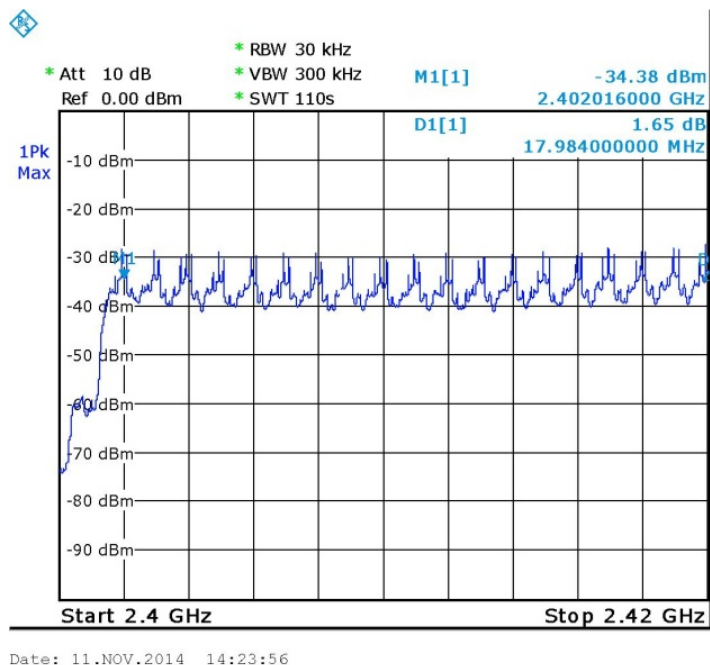


Figure 28. Frequency Hopping, EDR modulation

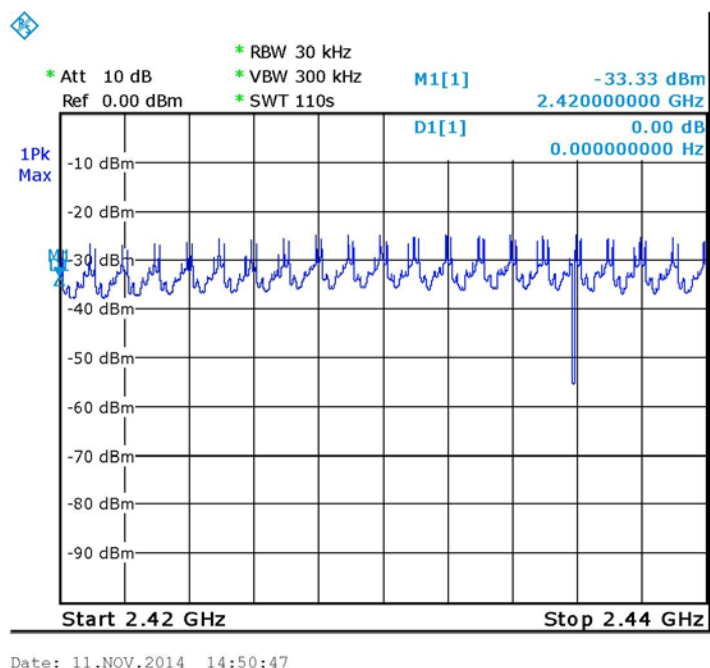


Figure 29. Frequency Hopping, EDR modulation

Number of Hopping Frequencies

E.U.T Description Rider Communication System
Type scala rider PACKTALK
Serial Number: Not Designated

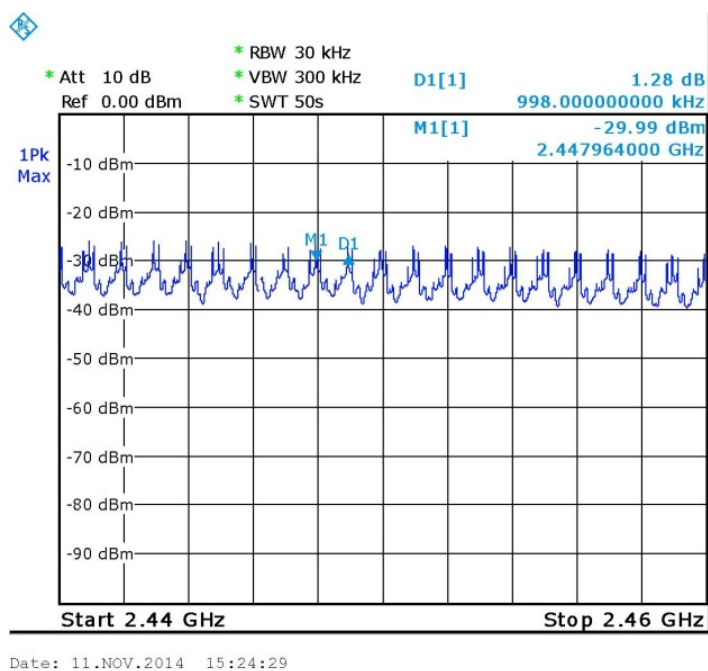


Figure 30. Frequency Hopping, EDR modulation

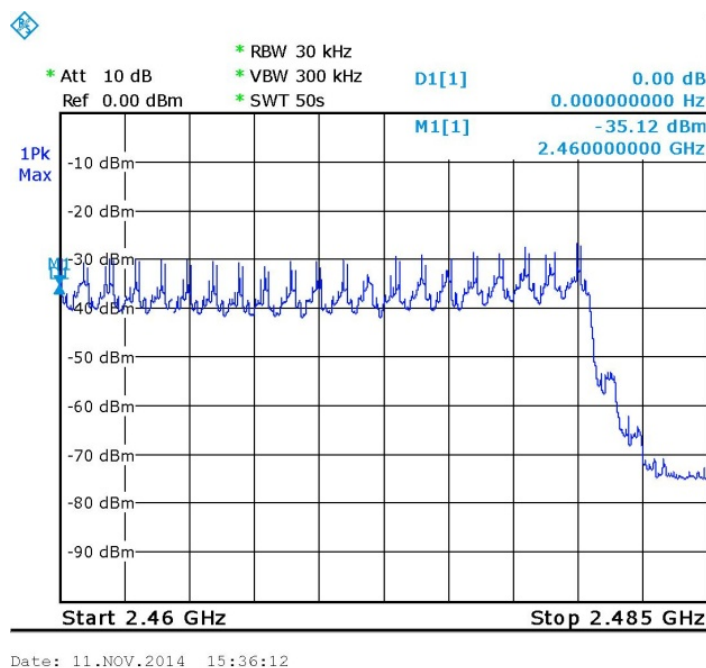


Figure 31. Frequency Hopping, EDR modulation

7.3 Results table

E.U.T. Description: Rider Communication System

Model No.: scala rider PACKTALK

Serial Number: Not Designated

Specification: FCC Part 15, Subpart C, 15.247(a)(1)(iii)

Modulation	Number of Hopping Frequencies	Specification
Standard	79	>75
EDR	79	>75

Figure 32 Number of Hopping Frequencies

TEST PERSONNEL:

Tester Signature:  Date: 31.12.14
Typed/Printed Name: M. Zohar

7.4 Test Instrumentation Used; Number of Frequency Hopping

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	R&S	ESIB7	100120	December 19, 2013	1 year
Spectrum Analyzer	R&S	FSL6	100194	December 1, 2013	1 year
Active Loop Antenna	EMCO	6502	9506-2950	November 4, 2014	1 year
Biconilog Antenna	EMCO	3142B	1250	May 22, 2014	2 years
Horn Antenna	ETS	3115	6142	March 14, 2012	3 years
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2014	1 year
Spectrum Analyzer	HP	8564E	3442A00275	March 2, 2014	1 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	August 22, 2014	1 year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 29, 2014	1 year
Antenna Mast	ETS	2070-2	9608-1497	N/A	N/A
Turntable	ETS	2087	-	N/A	N/A
Mast & Table Controller	ETS/EMCO	2090	9608-1456	N/A	N/A

Figure 33 Test Equipment Used

8. Channel Frequency Separation

8.1 Test Specification

Specification: FCC Part 15, Subpart C, 15.247(a) (1)

8.2 Test procedure

The E.U.T. was set to hopping mode.

The spectrum analyzer was set to the following parameters:

Span: 20 MHz

RBW: 30 kHz

VBW: 300 kHz

Detector Function: Peak

Trace: Maximum Hold

The marker delta function to determine the separation between the peaks of the adjacent channels was used.

The E.U.T was evaluated in 2 modulations: EDR and standard.

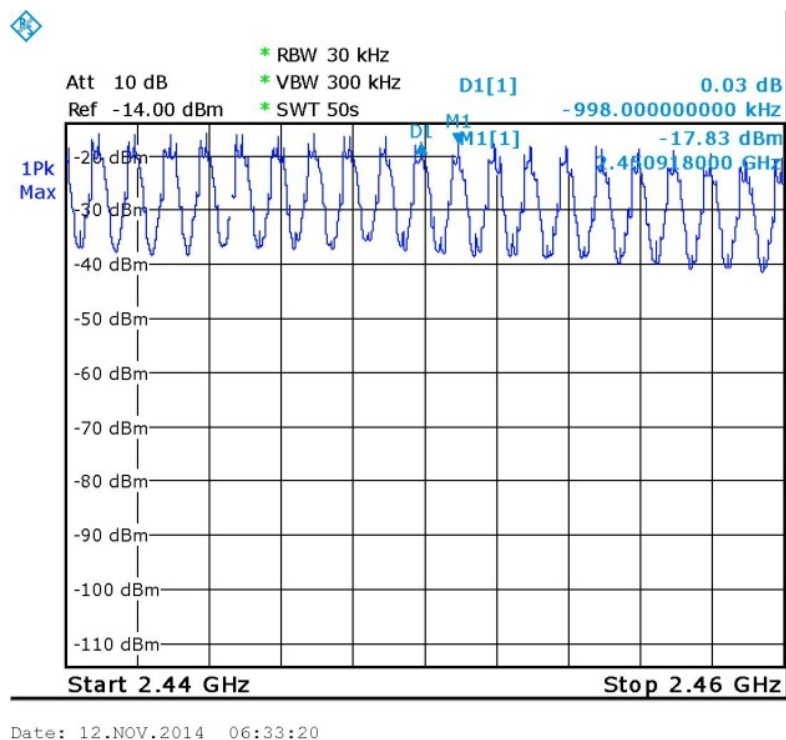


Figure 34. Standard Modulation

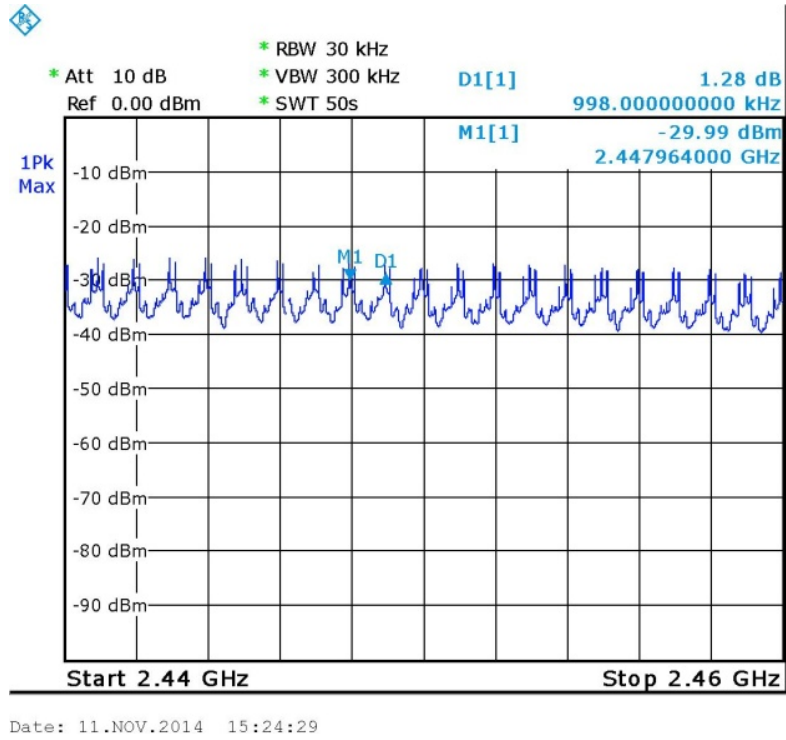


Figure 35. EDR Modulation

8.3 Results table

E.U.T. Description: Rider Communication System

Model No.: scala rider PACKTALK

Serial Number: Not Designated

Specification: FCC Part 15, Subpart C, 15.247(a) (1)

Modulation	Channel Frequency Separation (kHz)	Specification (kHz)	Margin (kHz)
Standard	998	780	218
EDR	998	990	8

Figure 36 Channel Frequency Separation

JUDGEMENT: Passed by 8 kHz

TEST PERSONNEL:

Tester Signature: _____

Typed/Printed Name: M. Zohar

Date: 31.12.14

8.4 Test Instrumentation Used; Channel Frequency Separation

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	R&S	ESIB7	100120	December 19, 2013	1 year
Spectrum Analyzer	R&S	FSL6	100194	December 1, 2013	1 year
Active Loop Antenna	EMCO	6502	9506-2950	November 4, 2014	1 year
Biconilog Antenna	EMCO	3142B	1250	May 22, 2014	2 years
Horn Antenna	ETS	3115	6142	March 14, 2012	3 years
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2014	1 year
Spectrum Analyzer	HP	8564E	3442A00275	March 2, 2014	1 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	August 22, 2014	1 year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 29, 2014	1 year
Antenna Mast	ETS	2070-2	9608-1497	N/A	N/A
Turntable	ETS	2087	-	N/A	N/A
Mast & Table Controller	ETS/EMCO	2090	9608-1456	N/A	N/A

Figure 37 Test Equipment Used

9. Radiated Power Output

9.1 Test Specification

F.C.C. Part 15, Subpart C: 15.247(b)

9.2 Test procedure

The E.U.T was placed on a non-metallic table, 0.8 meters above the ground plane, on a remote-controlled turntable in the OATS. The test distance was 3 meters.

The transmitter unit operated with normal modulation. The EMI receiver was set to 1 MHz resolution BW. The EUT was set up as shown in Figure 3, and its proper operation was checked.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

The E.U.T was evaluated in 2 modulations: EDR and standard (external antenna/internal antenna).

The E.U.T. was tested in three operating channels and frequencies: 2.402 GHz, 2.441 GHz and 2.480 GHz.

Radiated output power levels were measured at selected operation frequencies and the results were converted to power level according to the formula as shown below:

$$P = \frac{(E_{V/m} \times d)^2}{(30 \times G)} [W]$$

E- Field Strength (v/m)

d- Distance from transmitter (m)

G- Antenna gain

P- Peak power (W)


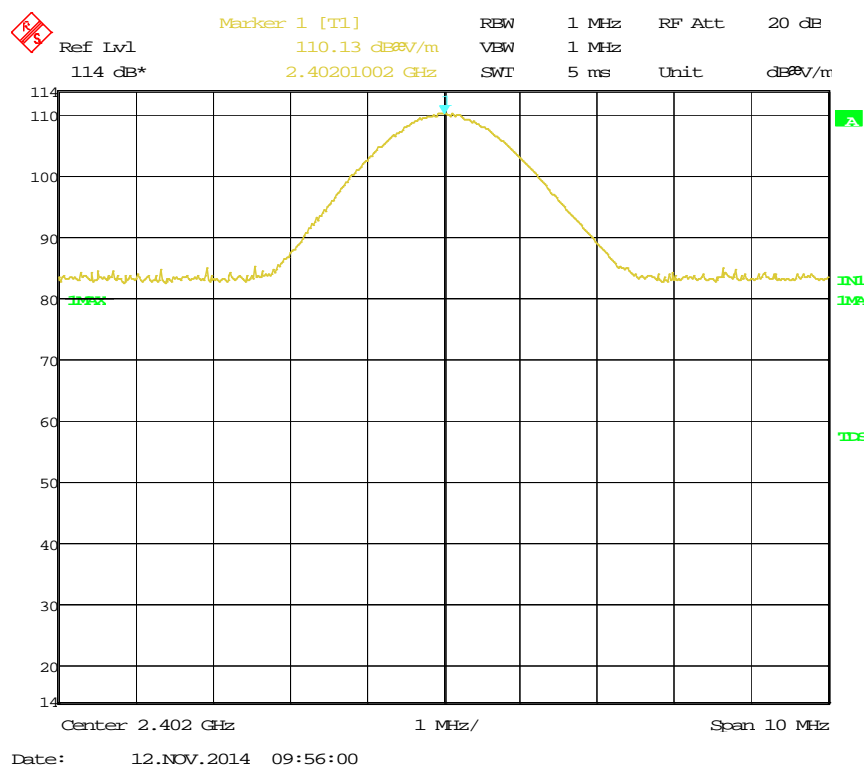


Figure 38 2402.00 MHz – Vertical, Standard Modulation – External Antenna

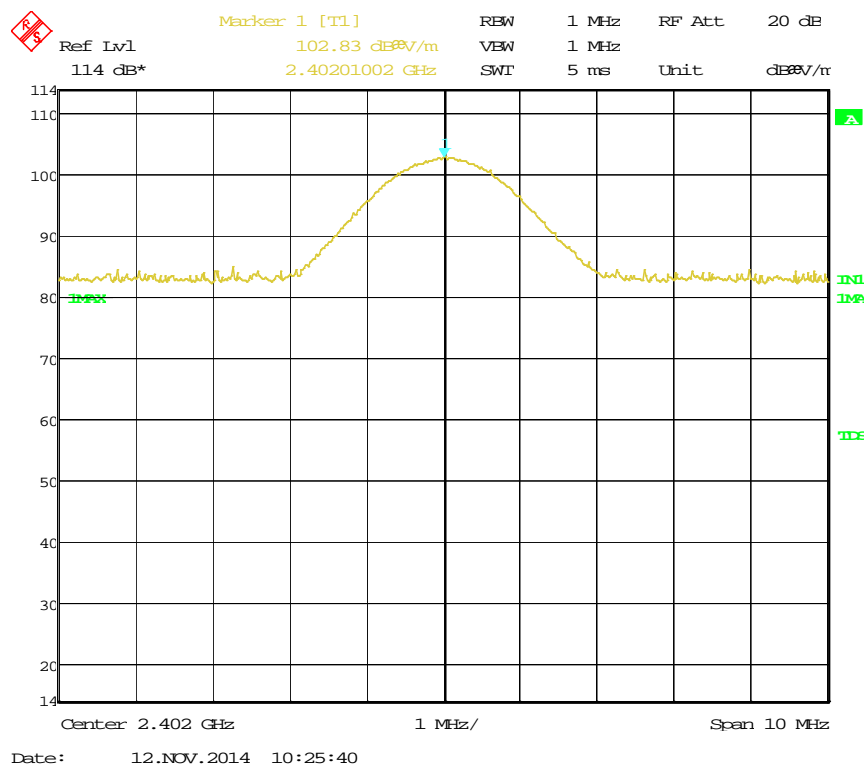

7

Figure 39 2402.00 MHz – Horizontal, Standard Modulation – External Antenna

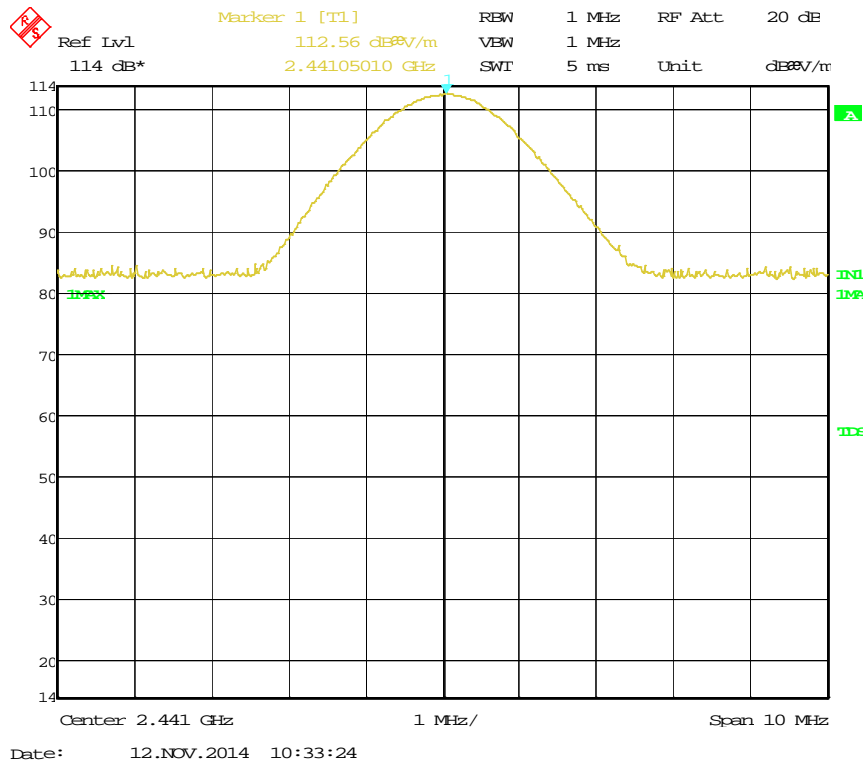


Figure 40 2441.00 MHz – Vertical, Standard Modulation – External Antenna

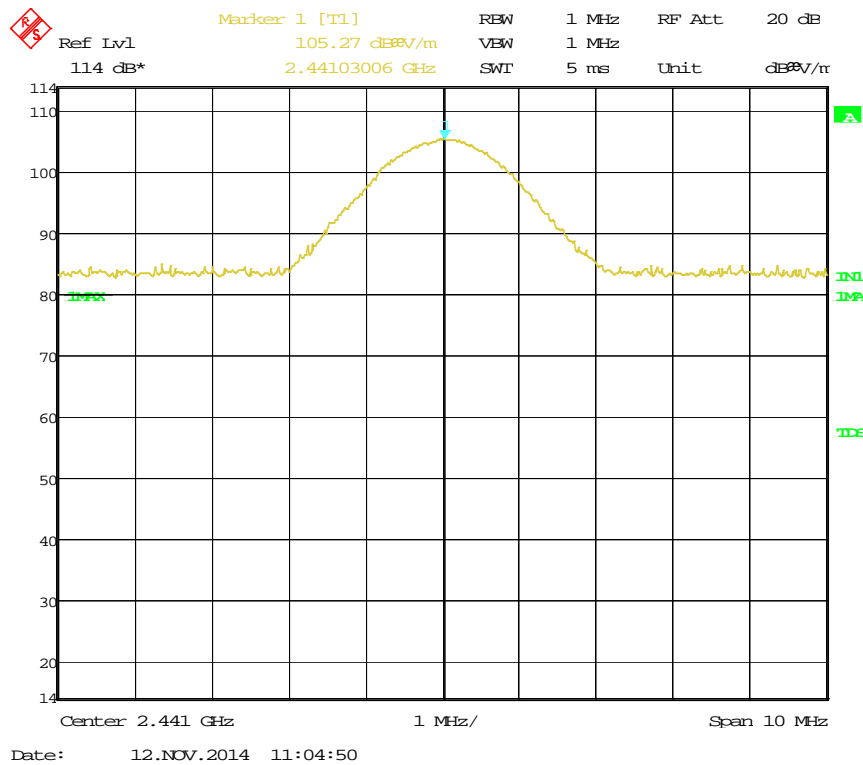


Figure 41 2441.00 MHz – Horizontal, Standard Modulation – External Antenna

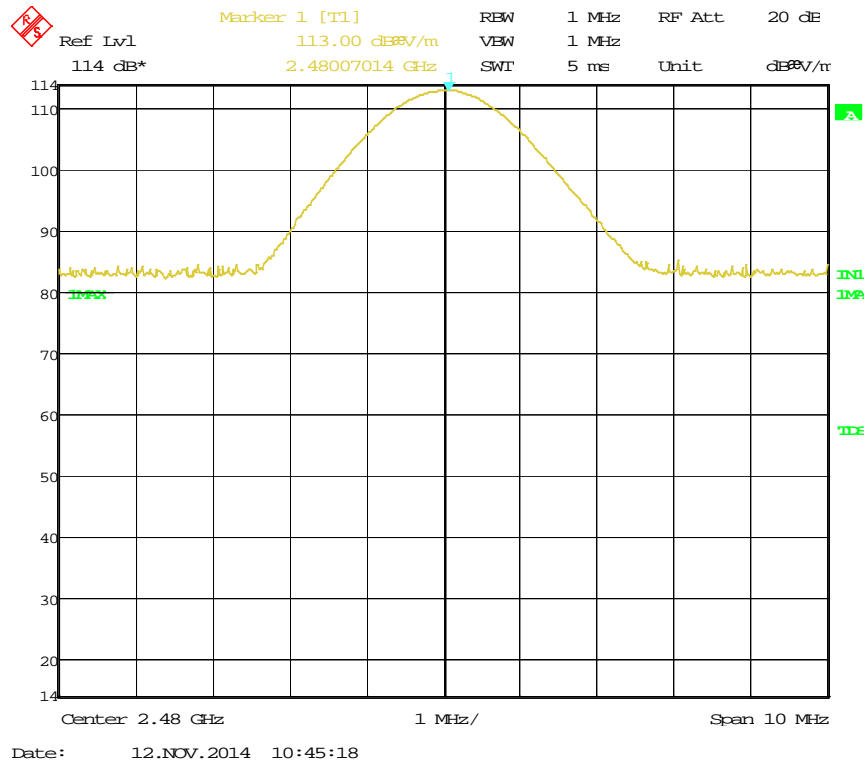


Figure 42 2480.00 MHz – Vertical, Standard Modulation – External Antenna

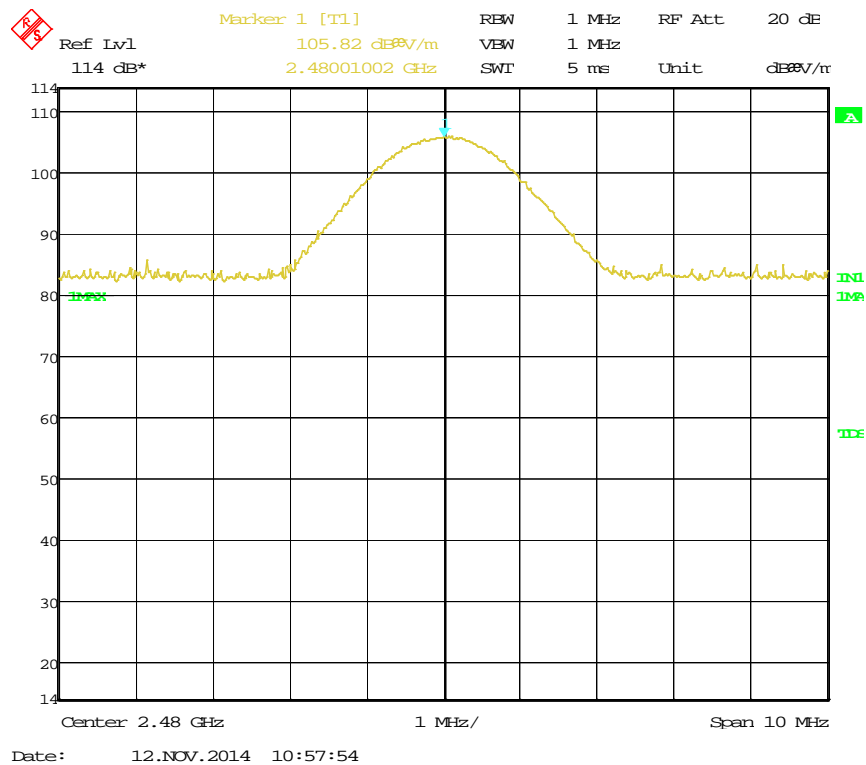


Figure 43 2480.00 MHz – Horizontal, Standard Modulation – External Antenna

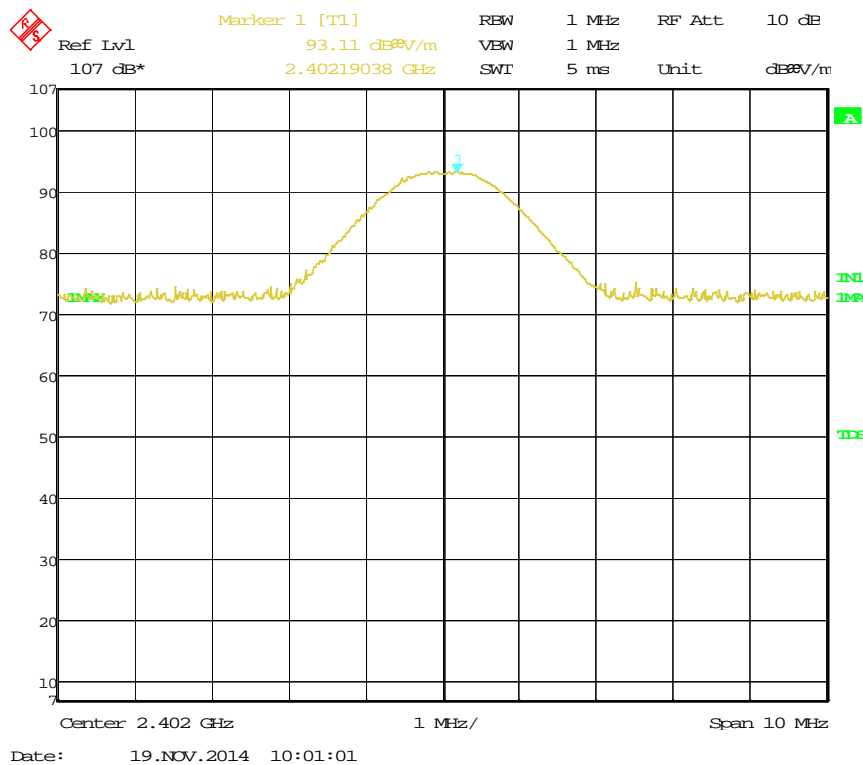


Figure 44 2402.00 MHz – Horizontal, Standard Modulation – Internal Antenna

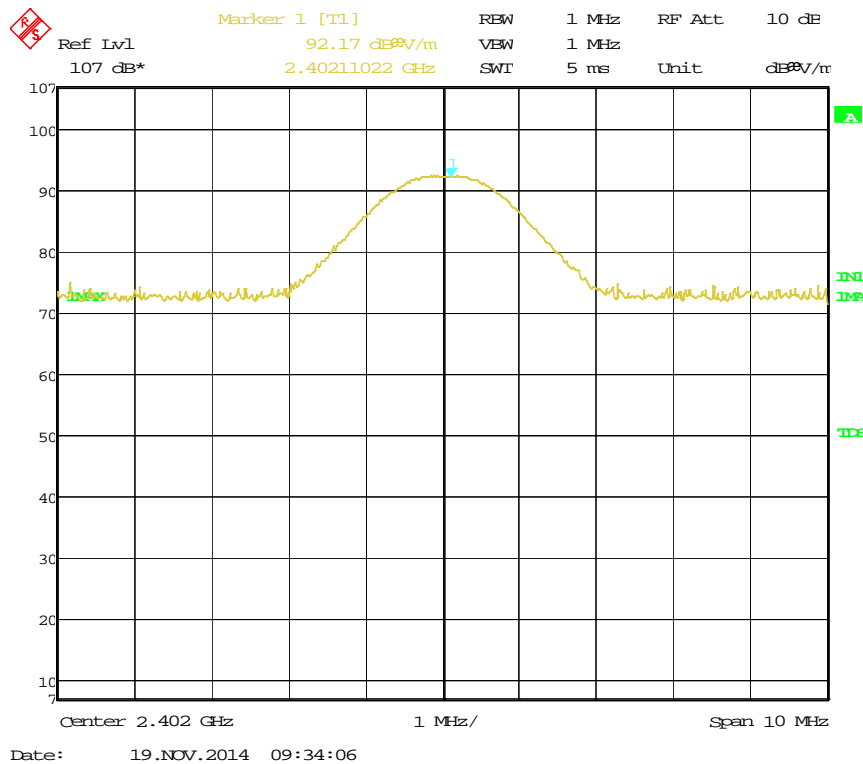


Figure 45 2402.00 MHz – Vertical, Standard Modulation – Internal Antenna

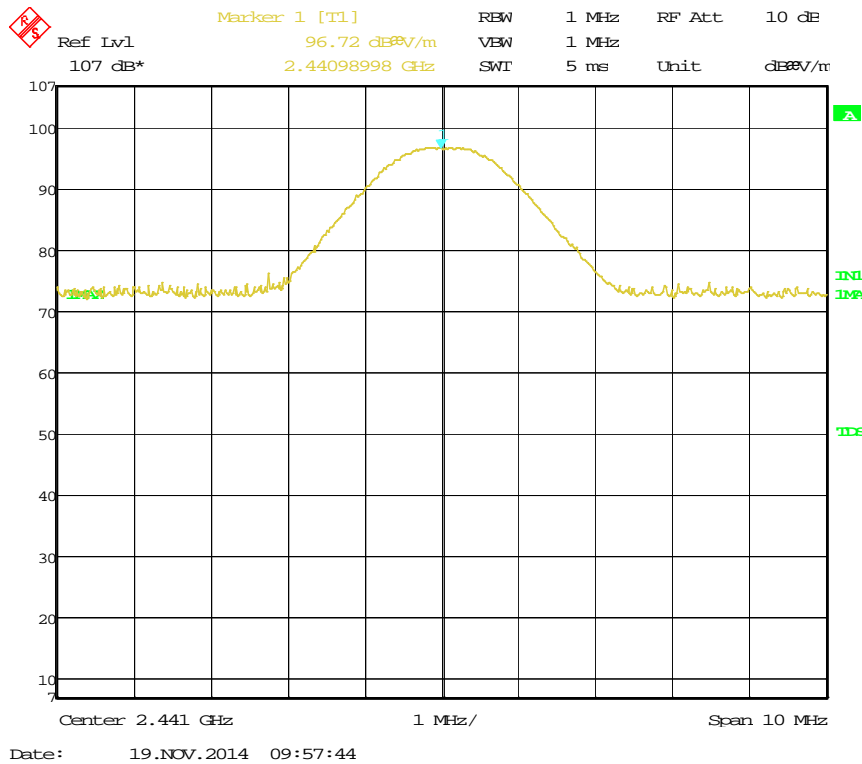


Figure 46 2441.00 MHz – Horizontal, Standard Modulation – Internal Antenna

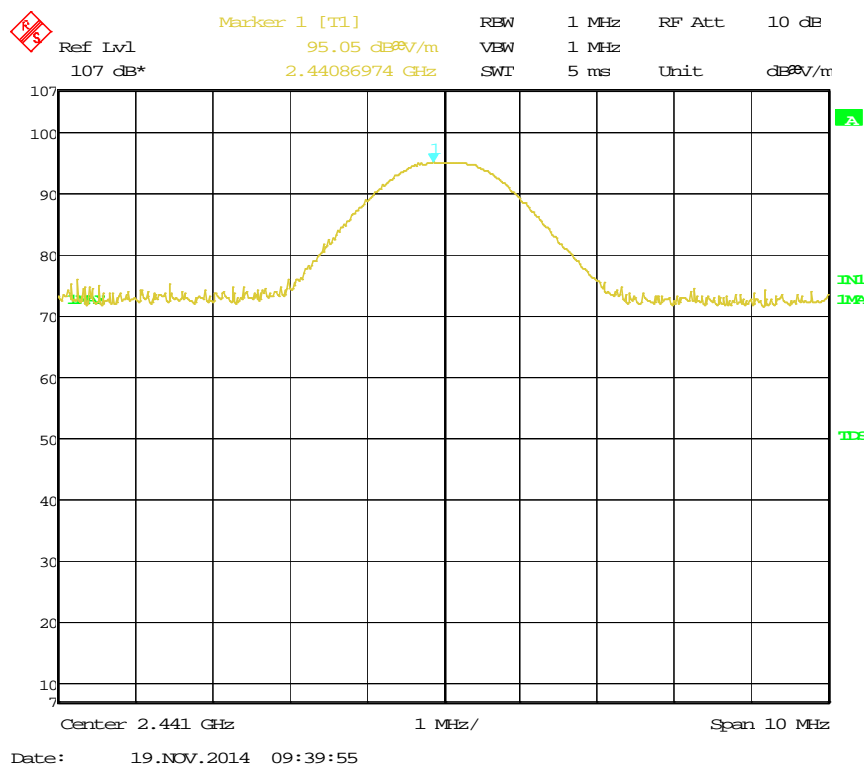


Figure 47 2441.00 MHz – Vertical, Standard Modulation – Internal Antenna

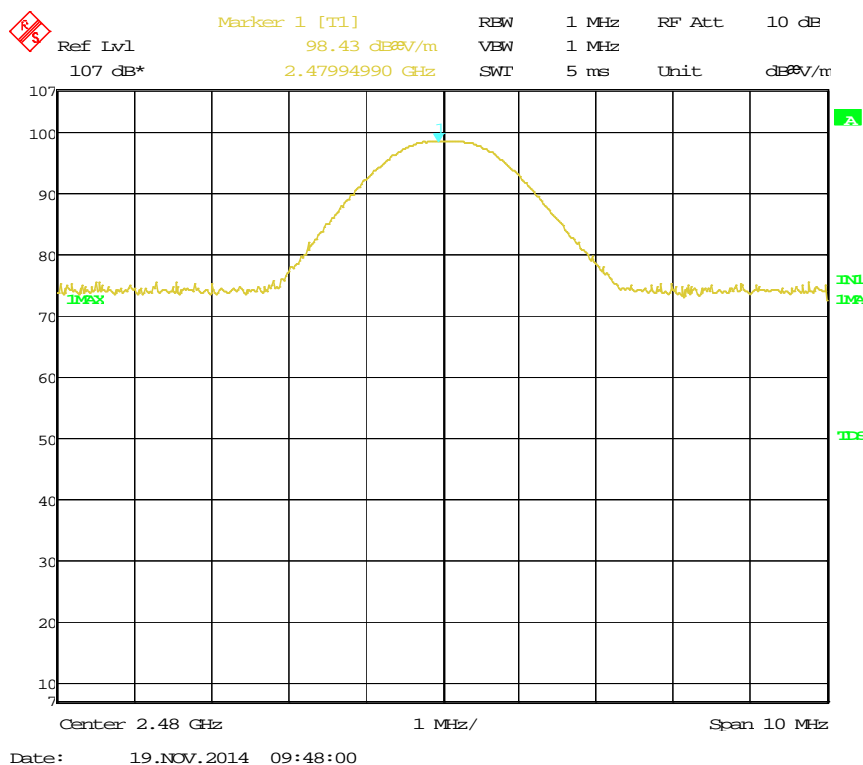


Figure 48 2480.00 MHz – Horizontal, Standard Modulation - Internal Antenna

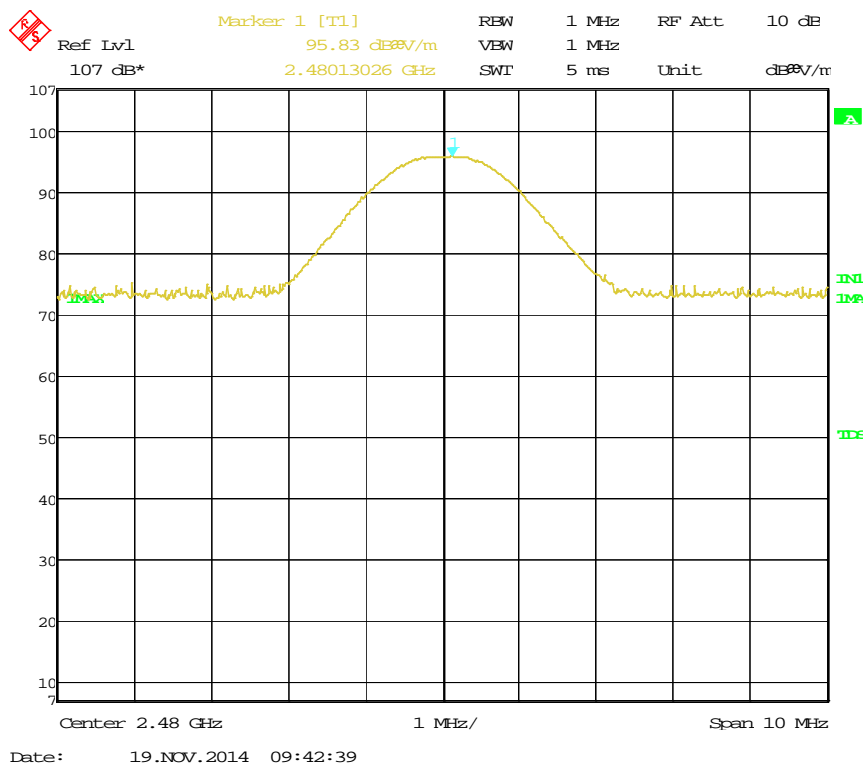


Figure 49 2480.00 MHz – Vertical, Standard Modulation – Internal Antenna

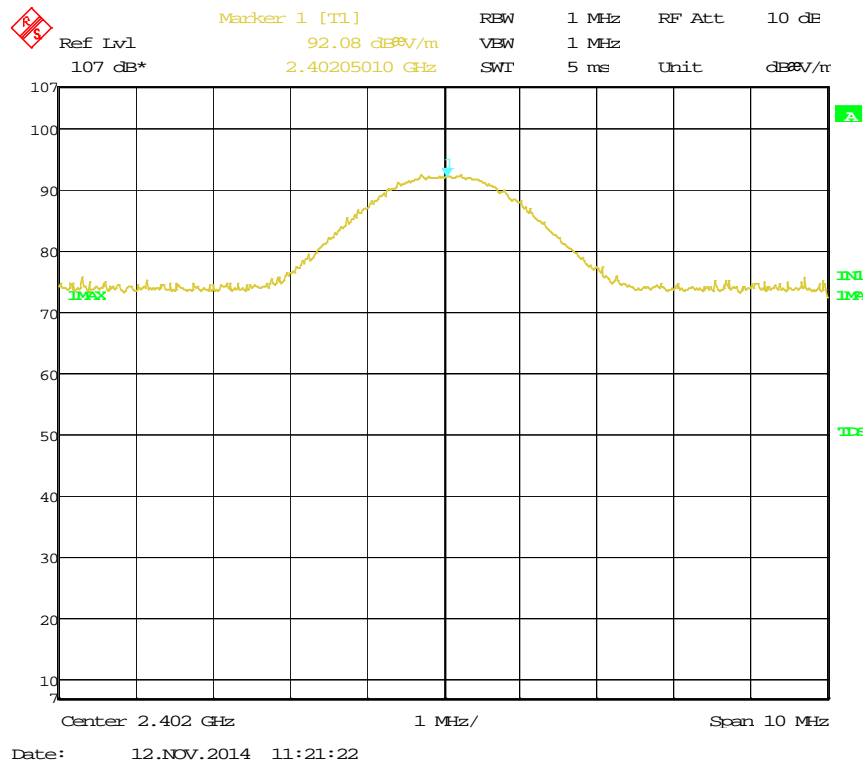


Figure 50 2402.00 MHz – Vertical, EDR Modulation

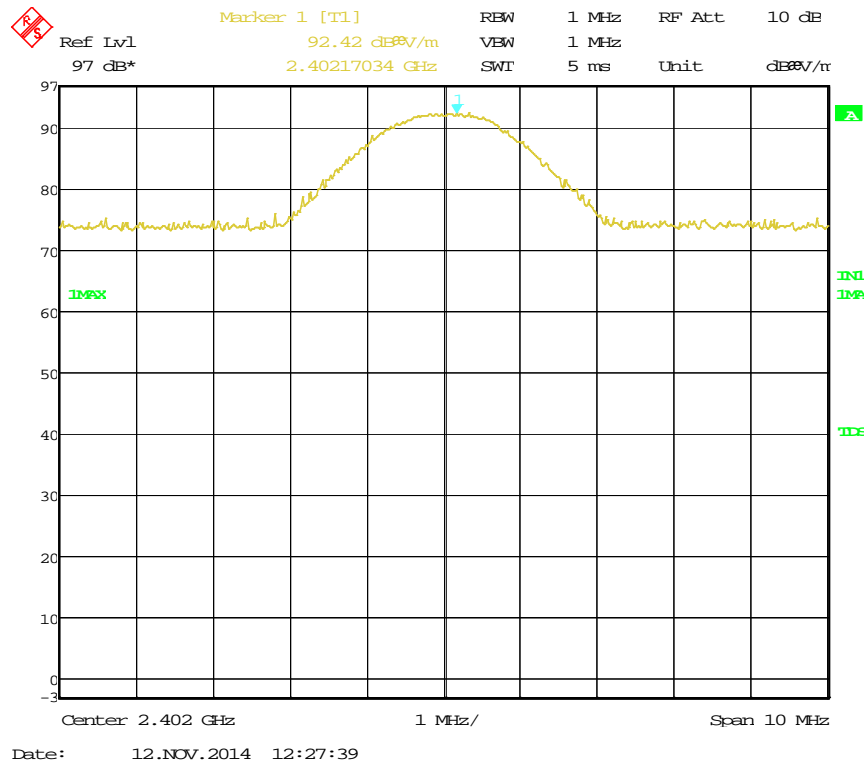


Figure 51 2402.00 MHz – Horizontal, EDR Modulation

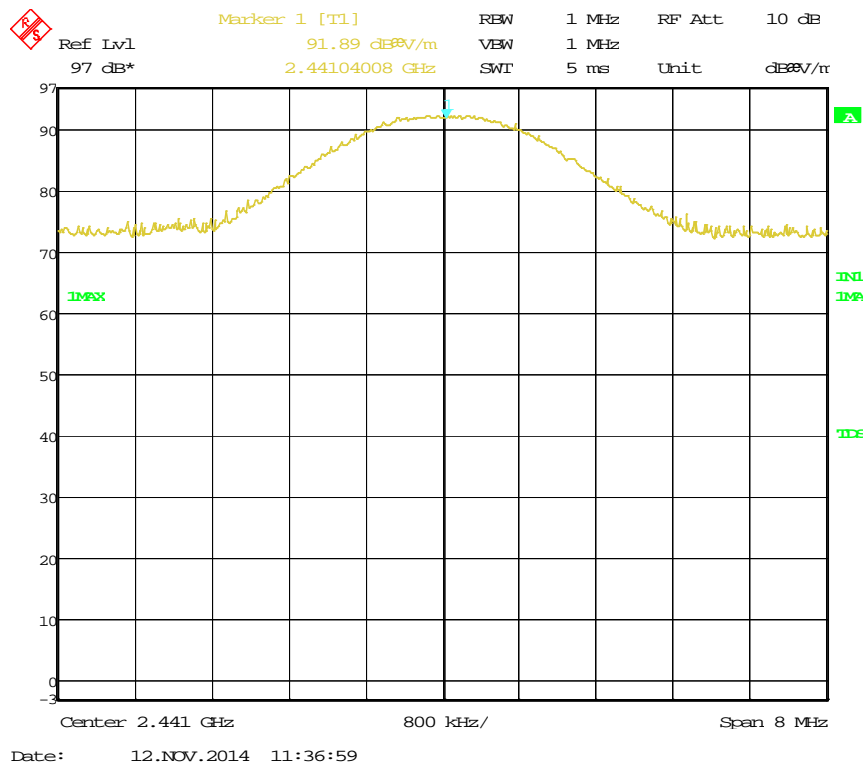


Figure 52 2441.00 MHz – Vertical, EDR Modulation

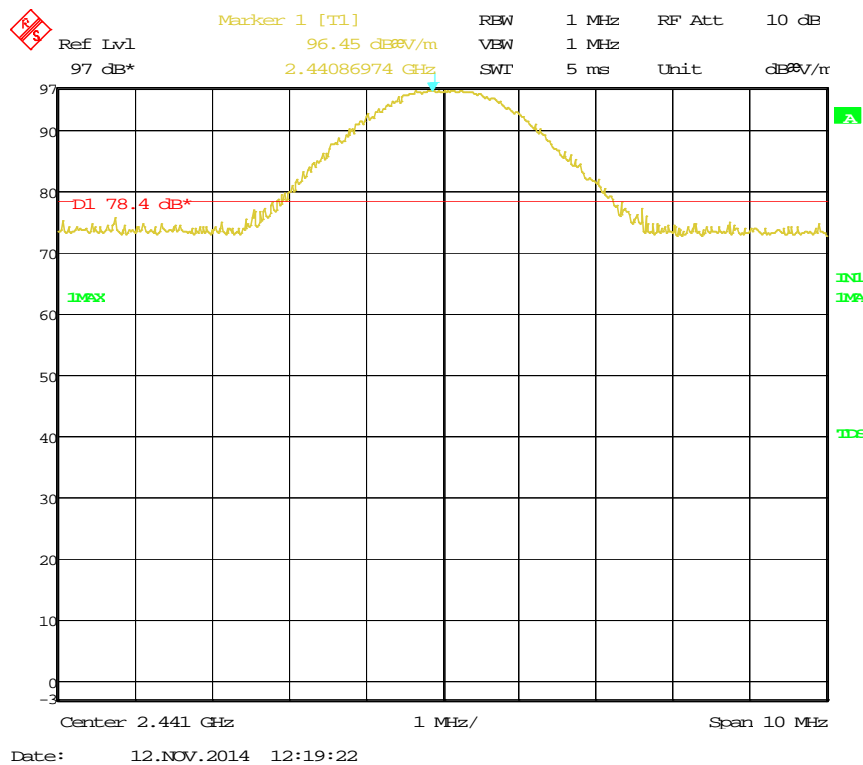


Figure 53 2441.00 MHz – Horizontal, EDR Modulation

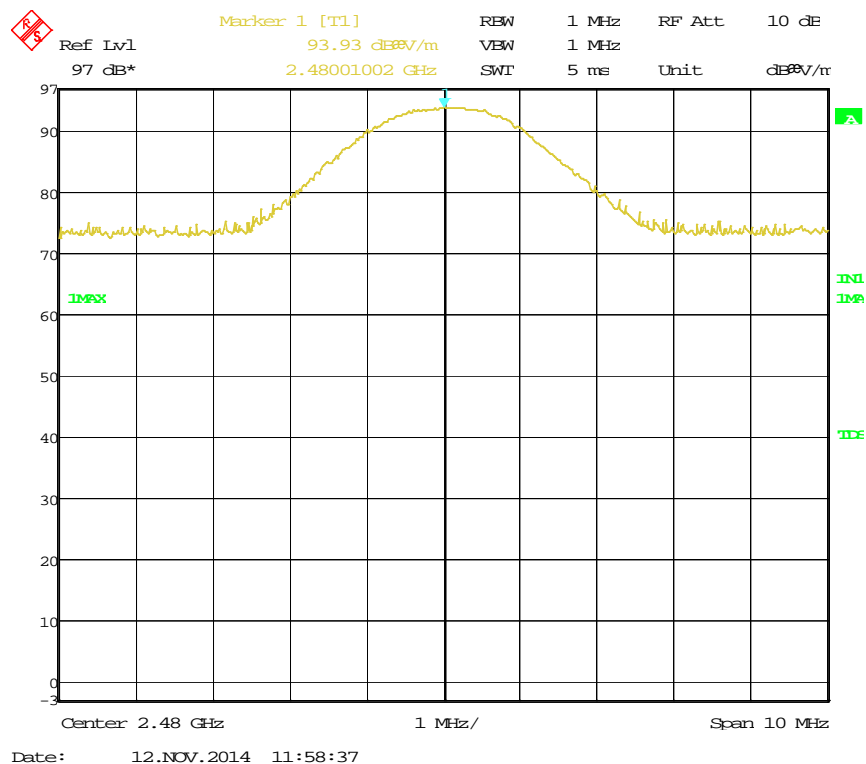


Figure 54 2480.00 MHz – Vertical, EDR Modulation

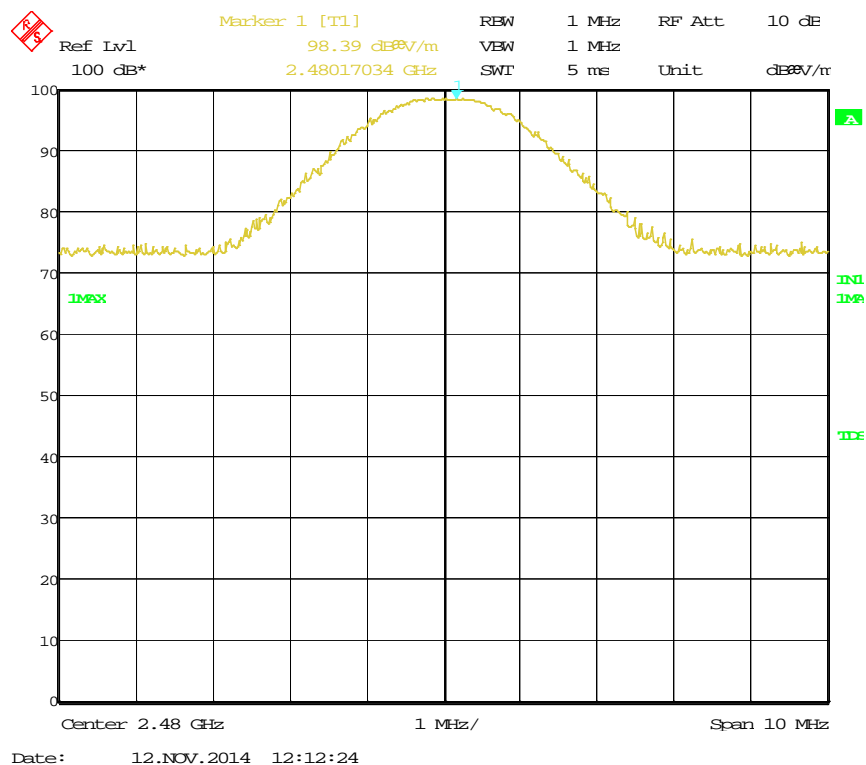


Figure 55 2480.00 MHz – Horizontal, EDR Modulation

9.3 Results Calculation

E.U.T. Description: Rider Communication System

Model No.: scala rider PACKTALK

Serial Number: Not Designated

Specification: F.C.C. Part 15, Subpart C

The following calculations were used to determine maximum radiated power output.

$$P = \frac{(E_{V/m} \times d)^2}{(30 \times G)} [W]$$

Operation Frequency (MHz)	Modulation	Polarization V/H	Power (dBuV/m)	Power (dBm)	Specification (dBm)	Margin (dB)
Low	Standard External Antenna	V	110.1	14.9	20	-5.1
Low		H	102.8	7.6	20	-12.4
Mid		V	112.6	17.4	20	-2.6
Mid		H	105.3	10.1	20	-9.9
High		V	113.0	17.8	20	-15.8
High		H	105.8	19.6	20	-0.4
Low	Standard Internal Antenna	V	92.2	-3.0	20	-23.0
Low		H	93.1	-2.1	20	-22.1
Mid		V	95.0	-0.2	20	-20.2
Mid		H	96.7	1.5	20	-18.5
High		V	95.8	0.6	20	-19.4
High		H	98.4	3.2	20	-16.8
Low	EDR	V	92.1	-3.1	20	-23.1
Low		H	92.4	-2.8	20	-22.8
Mid		V	91.9	-3.3	20	-23.3
Mid		H	96.5	1.3	20	-18.7
High		V	93.9	-1.3	20	-21.3
High		H	98.4	3.2	20	-16.8

Figure 56 Radiated Power Output

JUDGEMENT:

Passed by 0.4 dB

TEST PERSONNEL:

Tester Signature: _____

Date: 31.12.14

Typed/Printed Name: M. Zohar

9.4 Test Equipment Used, Radiated Maximum Power Output

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	R&S	ESIB7	100120	December 19, 2013	1 year
Spectrum Analyzer	R&S	FSL6	100194	December 1, 2013	1 year
Active Loop Antenna	EMCO	6502	9506-2950	November 4, 2014	1 year
Biconilog Antenna	EMCO	3142B	1250	May 22, 2014	2 years
Horn Antenna	ETS	3115	6142	March 14, 2012	3 years
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2014	1 year
Spectrum Analyzer	HP	8564E	3442A00275	March 2, 2014	1 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	August 22, 2014	1 year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 29, 2014	1 year
Antenna Mast	ETS	2070-2	9608-1497	N/A	N/A
Turntable	ETS	2087	-	N/A	N/A
Mast & Table Controller	ETS/EMCO	2090	9608-1456	N/A	N/A

Figure 57 Test Equipment Used

10. Dwell Time on Each Channel

10.1 Test Specification

FCC Part 15, Section 15.247(a)(1)(iii)

10.2 Test Procedure

The E.U.T. was tested in radiated mode. The spectrum analyzer was set to 1 MHz RBW and 3 MHz VBW.

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

The E.U.T was evaluated in 2 modulations: EDR and standard.

Test Results

The E.U.T met the requirements of the FCC Part 15, Section 15.247(a)(1)(iii).

JUDGEMENT: Passed

TEST PERSONNEL:

Tester Signature: _____ Date: 31.12.14

Typed/Printed Name: M. Zohar

Additional information of the results is given in *Figure 58* to *Figure 61*.

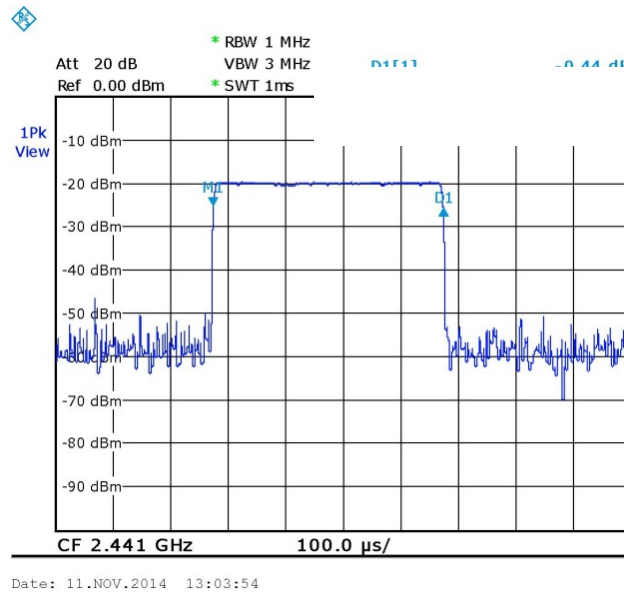


Figure 58 — Ton= 0.4msec, Standard Modulation

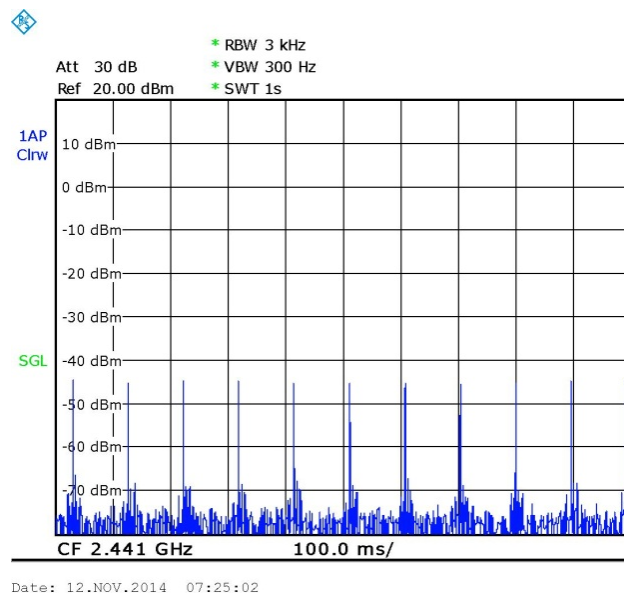


Figure 59 — Num bursts at 1sec = 11, Standard Modulation
[11 X 0.4msecX31.6 =139msec, limit 400msec]

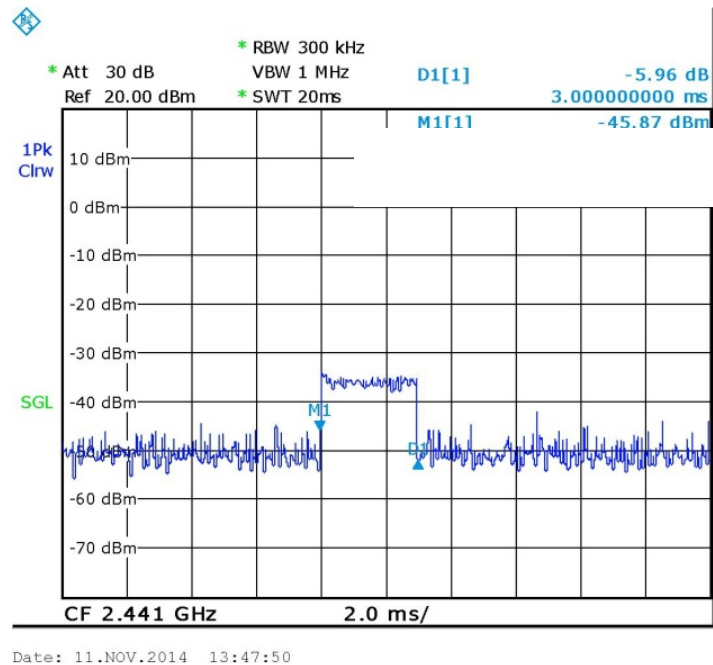


Figure 60 — Ton=3.0msec, EDR Modulation

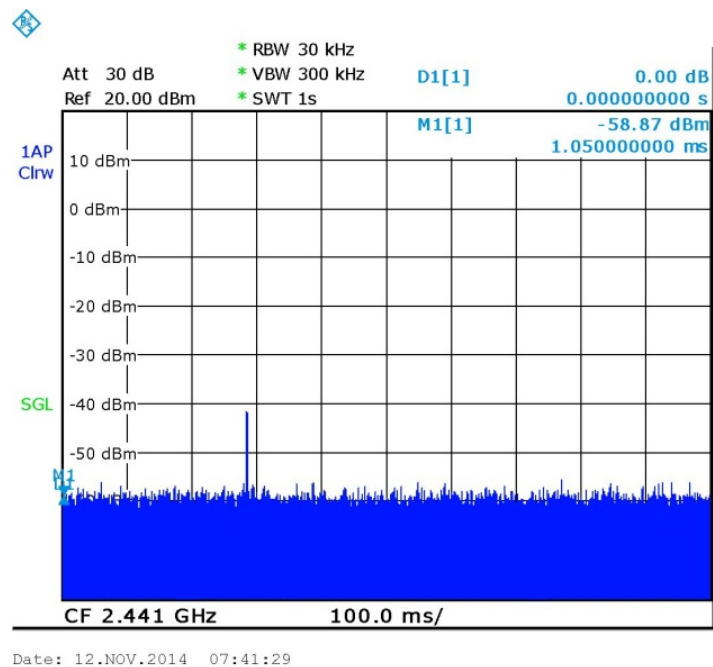


Figure 61 — Num bursts at 1sec= 1, EDR Modulation
[1 X 3.0msec X 31.9 =95.7msec, limit 400msec]

10.3 Test Equipment Used; Dwell Time

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	R&S	ESIB7	100120	December 19, 2013	1 year
Spectrum Analyzer	R&S	FSL6	100194	December 1, 2013	1 year
Active Loop Antenna	EMCO	6502	9506-2950	November 4, 2014	1 year
Biconilog Antenna	EMCO	3142B	1250	May 22, 2014	2 years
Horn Antenna	ETS	3115	6142	March 14, 2012	3 years
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2014	1 year
Spectrum Analyzer	HP	8564E	3442A00275	March 2, 2014	1 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	August 22, 2014	1 year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 29, 2014	1 year
Antenna Mast	ETS	2070-2	9608-1497	N/A	N/A
Turntable	ETS	2087	-	N/A	N/A
Mast & Table Controller	ETS/EMCO	2090	9608-1456	N/A	N/A

Figure 62 Test Equipment Used

11. Band Edge

[In Accordance with section 15.247(d)]

11.1 Test procedure

The E.U.T was placed on a non-metallic table, 0.8 meters above the ground plane, on a remote-controlled turntable in the OATS. The test distance was 3 meters. The transmitter unit operated with normal modulation. The EMI receiver was set to 100 KHz resolution BW. The EUT was set up as shown in Figure 3, and its proper operation was checked.

The EMI receiver was adjusted to the transmission channel at the maximum radiated level. The display line was set to 20 dBc and the EMI receiver was set to the band edge frequencies.

The E.U.T was evaluated in 2 modulations: EDR and standard (internal antenna/external antenna).

Maximum power level below 2400 MHz and above 2483.5 MHz was measured relative to power level at the Low and the High channels correspondingly.

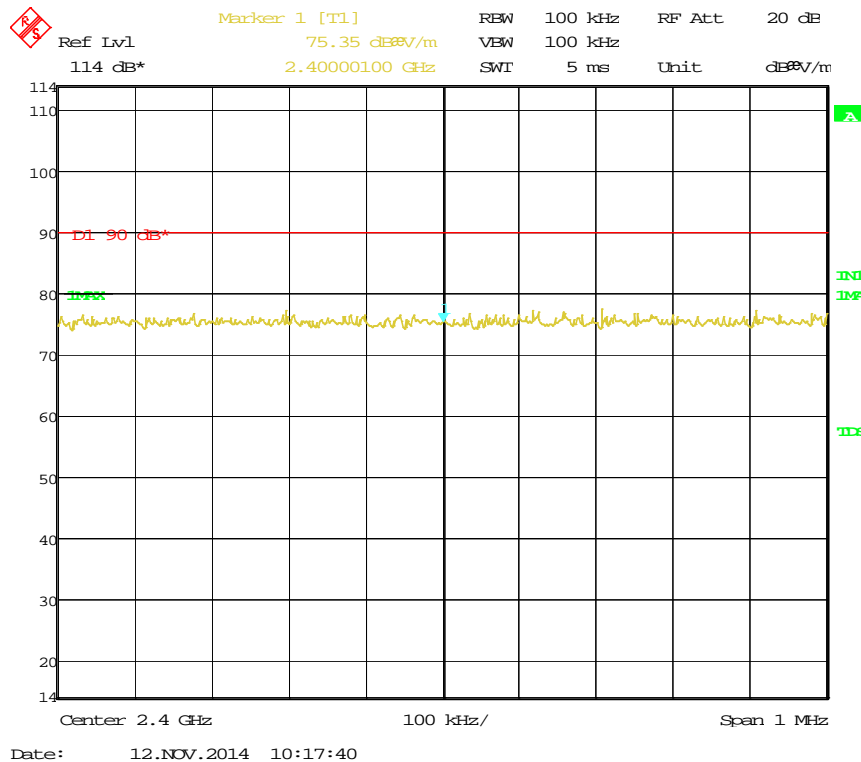


Figure 63 — Lower Band Edge, Standard Modulation – External Antenna

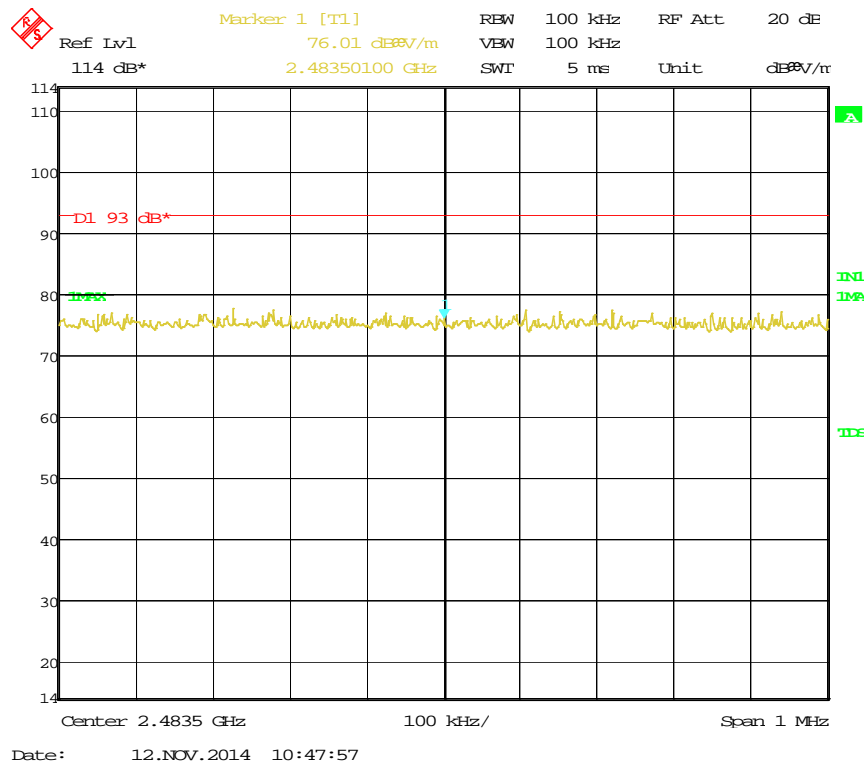


Figure 64 — Upper Band Edge, Standard Modulation – External Antenna

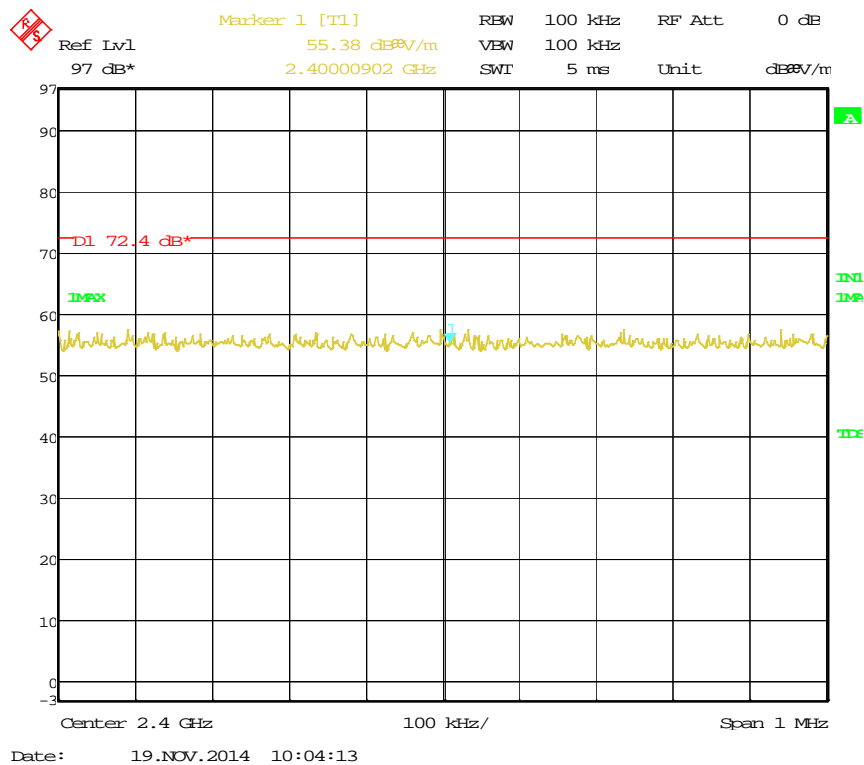


Figure 65 — Lower Band Edge, Standard Modulation – Internal Antenna

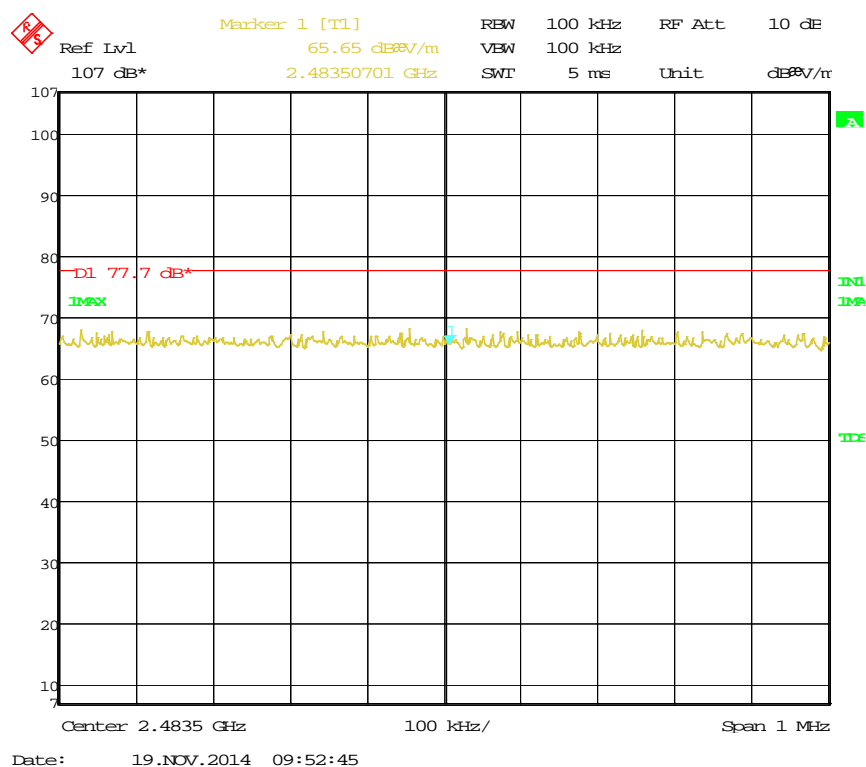


Figure 66 — Upper Band Edge, Standard Modulation – Internal Antenna

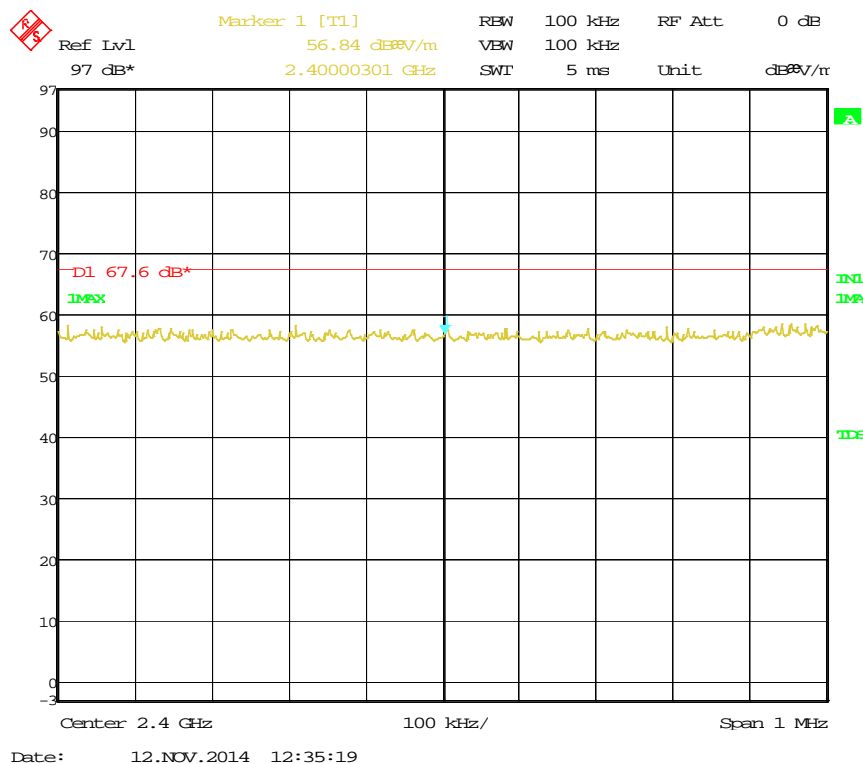


Figure 67 — Lower Band Edge, EDR Modulation

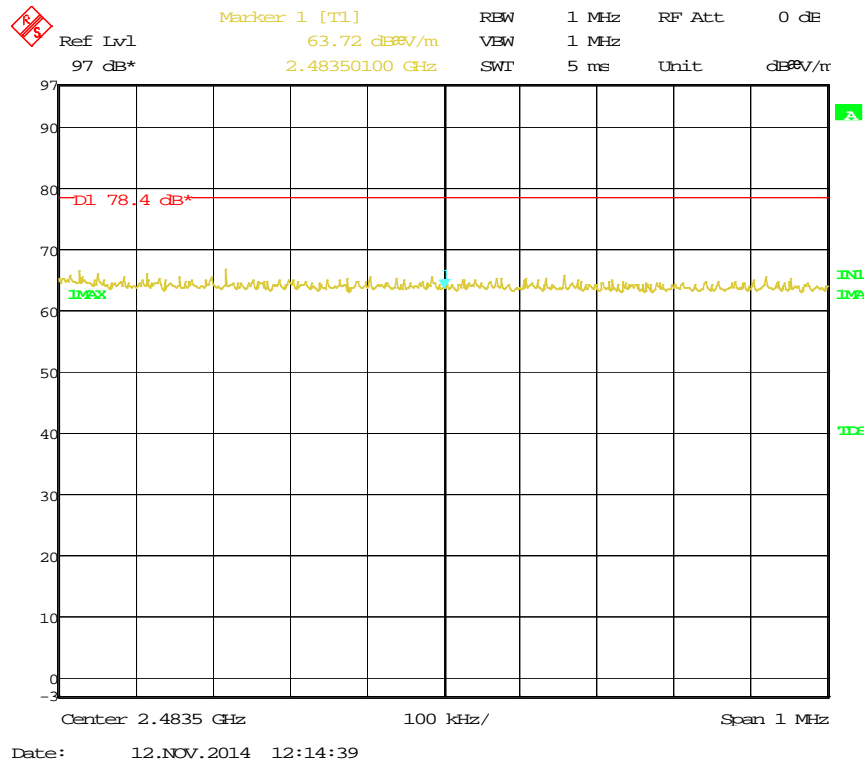


Figure 68 — Upper Band Edge, EDR Modulation

11.2 Results table

E.U.T. Description: Rider Communication System
Model No.: scala rider PACKTALK
Serial Number: Not Designated
Specification: F.C.C. Part 15, Subpart C (15.247 (d))

Operation Frequency (MHz)	Modulation	Band Edge Frequency (MHz)	Spectrum Level (dBuV/m)	Specification (dBuV/m)	Margin (dB)
2402	Standard External Antenna	2400.0	75.1	90.1	-15.0
2480	Standard External Antenna	2483.5	76.9	93.0	-16.1
2402	Standard Internal Antenna	2400.0	55.4	72.4	-17.0
2480	Standard Internal Antenna	2483.5	66.2	77.7	-11.5
2402	EDR	2400.0	56.8	67.6	-10.8
2480	EDR	2483.5	63.7	78.4	-14.7

Figure 69 Band Edge

JUDGEMENT

Passed by 2.1 dB

TEST PERSONNEL:

Tester Signature:  _____

Date: 31.12.14

Typed/Printed Name: M. Zohar

11.3 Test Equipment Used, Band Edge Spectrum

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	R&S	ESIB7	100120	December 19, 2013	1 year
Spectrum Analyzer	R&S	FSL6	100194	December 1, 2013	1 year
Active Loop Antenna	EMCO	6502	9506-2950	November 4, 2014	1 year
Biconilog Antenna	EMCO	3142B	1250	May 22, 2014	2 years
Horn Antenna	ETS	3115	6142	March 14, 2012	3 years
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2014	1 year
Spectrum Analyzer	HP	8564E	3442A00275	March 2, 2014	1 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	August 22, 2014	1 year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 29, 2014	1 year
Antenna Mast	ETS	2070-2	9608-1497	N/A	N/A
Turntable	ETS	2087	-	N/A	N/A
Mast & Table Controller	ETS/EMCO	2090	9608-1456	N/A	N/A

Figure 70 Test Equipment Used

12. Radiated Emission, 9 kHz – 30 MHz

12.1 Test Specification

9 kHz-30 MHz, FCC, Part 15, Subpart C, Section 209

12.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-30 MHz was scanned.

The emissions were measured using a computerized EMI receiver complying with CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

The E.U.T was evaluated in standard modulation exterior antenna mode for worst case.

In the frequency range 9 kHz-30MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter at a distance of 3 meters.

12.3 Measured Data

JUDGEMENT: Passed

The EUT met the requirements of the F.C.C. Part 15, Subpart C, Section 209 specification.

The results for all three channels were the same.

No signals were detected in the frequency range of 9 kHz – 30 MHz.

TEST PERSONNEL:

Tester Signature: _____



Date: 31.12.14

Typed/Printed Name: M. Zohar

12.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	R&S	ESIB7	100120	December 19, 2013	1 year
Spectrum Analyzer	R&S	FSL6	100194	December 1, 2013	1 year
Active Loop Antenna	EMCO	6502	9506-2950	November 4, 2014	1 year
Biconilog Antenna	EMCO	3142B	1250	May 22, 2014	2 years
Horn Antenna	ETS	3115	6142	March 14, 2012	3 years
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2014	1 year
Spectrum Analyzer	HP	8564E	3442A00275	March 2, 2014	1 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	August 22, 2014	1 year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 29, 2014	1 year
Antenna Mast	ETS	2070-2	9608-1497	N/A	N/A
Turntable	ETS	2087	-	N/A	N/A
Mast & Table Controller	ETS/EMCO	2090	9608-1456	N/A	N/A

Figure 71 Test Equipment Used

12.5 **Field Strength Calculation**

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS: Field Strength [dB μ V/m]

RA: Receiver Amplitude [dB μ V]

AF: Receiving Antenna Correction Factor [dB/m]

CF: Cable Attenuation Factor [dB]

Example: $FS = 30.7 \text{ dB}\mu\text{V (RA)} + 14.0 \text{ dB (AF)} + 0.9 \text{ dB (CF)} = 45.6 \text{ dB}\mu\text{V}$

No external pre-amplifiers are used.

13. Spurious Radiated Emission 30 – 25000 MHz

13.1 Test Specification

30 MHz- 25,000 MHz, F.C.C., Part 15, Subpart C

13.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground.

The E.U.T was evaluated in 2 modulations: EDR and standard (exterior antenna for worst case according to preliminary measurements).

The frequency range 30 MHz-1000 MHz was scanned and the list of the highest emissions was verified and updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

The emissions were measured using a computerized EMI receiver complying with CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 30-1000 MHz, the readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

In the frequency range 1-6.0 GHz, a computerized EMI receiver complying with CISPR 16 requirements was used.

In the frequency range 6.0-25.0 GHz, a spectrum analyzer including a low noise amplifier was used. During average measurements the IF bandwidth was 1 MHz and the video bandwidth was 100Hz. During peak measurements the IF bandwidth was 1 MHz and the video bandwidth was 3 MHz.

The test distance was 3 meters.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)



13.3 Test Data

JUDGEMENT: Passed

The EUT met the requirements of the F.C.C. Part 15, Subpart C specification.

For the operation channel 2.402 GHz, the margin between the emission level and the specification limit is 1.1 db in the worst case at the frequency of 2390.0 MHz, vertical polarization, EDR modulation.

For the operation channel 2.441 GHz, the margin between the emission level and the specification limit is 1.7 db in the worst case at the frequency of 4882.0 MHz, vertical polarization, EDR modulation.

For the operation channel 2.480 GHz, the margin between the emission level and the specification limit is 1.6 db in the worst case at the frequency of 2483.5 MHz, vertical polarization, EDR modulation.

TEST PERSONNEL:

Tester Signature: _____

Date: 31.12.14

Typed/Printed Name: M. Zohar

Radiated Emission

E.U.T Description Rider Communication System
Type scala rider PACKTALK
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
Test Distance: 3 meters Detector: Peak

Operation Frequency (MHz)	Modulation	Freq. (MHz)	Polarity (H/V)	Peak Reading (dBμV/m)	Peak Specification (dB μV/m)	Peak Margin (dB)
2402.0	Standard	2390.0	H	53.1	74.0	-20.9
2402.0	Standard	2390.0	V	54.9	74.0	-19.1
2402.0	Standard	4804.0	H	60.7	74.0	-13.3
2402.0	Standard	4804.0	V	62.1	74.0	-11.9
2402.0	Standard	9608.0	H	66.9	81.0	-14.1
2402.0	Standard	9608.0	V	67.1	89.0	-21.9
2441.0	Standard	4882.0	H	60.0	74.0	-14.0
2441.0	Standard	4882.0	V	61.8	74.0	-12.2
2441.0	Standard	9764.0	H	67.0	84.0	-17.0
2441.0	Standard	9764.0	V	67.2	91.0	-23.8
2480.0	Standard	4960.0	H	60.2	74.0	-13.8
2480.0	Standard	4960.0	V	63.5	74.0	-10.5
2480.0	Standard	9920.0	H	66.0	84.0	-18.0
2480.0	Standard	9920.0	V	65.2	92.0	-26.8
2480.0	Standard	2483.5	H	61.9	74.0	-12.1
2480.0	Standard	2483.5	V	64.7	74.0	-9.3

**Figure 72. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Peak**

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



Radiated Emission

E.U.T Description Rider Communication System
Type scala rider PACKTALK
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical
Test Distance: 3 meters

Frequency range: 1.0 GHz to 25.0 GHz
Detector: Average

Operation Frequency (MHz)	Modulation	Freq. (MHz)	Polarity (H/V)	Average Reading (dBμV/m)	Average Specification (dB μV/m)	Average Margin (dB)
2402.0	Standard	2390.0	H	43.2	54.0	-10.8
2402.0	Standard	2390.0	V	45.0	54.0	-9.0
2402.0	Standard	4804.0	H	50.8	54.0	-3.2
2402.0	Standard	4804.0	V	52.2	54.0	-1.8
2402.0	Standard	9608.0	H	N/A	N/A	N/A
2402.0	Standard	9608.0	V	N/A	N/A	N/A
2441.0	Standard	4882.0	H	50.1	54.0	-3.9
2441.0	Standard	4882.0	V	51.9	54.0	-2.1
2441.0	Standard	9764.0	H	N/A	N/A	N/A
2441.0	Standard	9764.0	V	N/A	N/A	N/A
2480.0	Standard	4960.0	H	40.3	54.0	-13.7
2480.0	Standard	4960.0	V	43.7	54.0	-10.3
2480.0	Standard	9920.0	H	N/A	N/A	N/A
2480.0	Standard	9920.0	V	N/A	N/A	N/A
2480.0	Standard	2483.5	H	49.2	54.0	-4.8
2480.0	Standard	2483.5	V	50.2	54.0	-3.8

**Figure 73. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



Radiated Emission

E.U.T Description Rider Communication System
Type scala rider PACKETALK
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
Test Distance: 3 meters Detector: Peak

Operation Frequency (MHz)	Modulation	Freq. (MHz)	Polarity (H/V)	Peak Reading (dBμV/m)	Peak Specification (dB μV/m)	Peak Margin (dB)
2402.0	EDR	2390.0	H	61.2	74.0	-12.8
2402.0	EDR	2390.0	V	61.7	74.0	-12.3
2402.0	EDR	4804.0	H	69.8	74.0	-4.2
2402.0	EDR	4804.0	V	70.8	74.0	-3.2
2402.0	EDR	9608.0	H	61.2	71.0	-9.8
2402.0	EDR	9608.0	V	60.0	71.1	-11.1
2441.0	EDR	4882.0	H	71.5	74.0	-2.5
2441.0	EDR	4882.0	V	70.9	74.0	-3.1
2441.0	EDR	9764.0	H	60.9	71.0	-10.1
2441.0	EDR	9764.0	V	60.1	70.0	-9.9
2480.0	EDR	4960.0	H	72.2	74.0	-1.8
2480.0	EDR	4960.0	V	72.3	74.0	-1.7
2480.0	EDR	9920.0	H	57.2	75.6	-18.4
2480.0	EDR	9920.0	V	58.7	74.2	-15.5
2480.0	EDR	2483.5	H	69.2	74.0	-4.8
2480.0	EDR	2483.5	V	63.4	74.0	-10.6

**Figure 74. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Peak**

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



Radiated Emission

E.U.T Description Rider Communication System
Type scala rider PACKETALK
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical
Test Distance: 3 meters

Frequency range: 1.0 GHz to 25.0 GHz
Detector: Average

Operation Frequency (MHz)	Modulation	Freq. (MHz)	Polarity (H/V)	Average Reading (dBμV/m)	Average Specification (dB μV/m)	Average Margin (dB)
2402.0	EDR	2390.0	H	52.3	54.0	-1.7
2402.0	EDR	2390.0	V	52.9	54.0	-1.1
2402.0	EDR	4804.0	H	48.7	54.0	-5.3
2402.0	EDR	4804.0	V	49.4	54.0	-4.6
2402.0	EDR	9608.0	H	N/A	N/A	N/A
2402.0	EDR	9608.0	V	N/A	N/A	N/A
2441.0	EDR	4882.0	H	51.4	54.0	-2.6
2441.0	EDR	4882.0	V	52.3	54.0	-1.7
2441.0	EDR	9764.0	H	N/A	N/A	N/A
2441.0	EDR	9764.0	V	N/A	N/A	N/A
2480.0	EDR	4960.0	H	52.1	54.0	-1.9
2480.0	EDR	4960.0	V	52.0	54.0	-2.0
2480.0	EDR	9920.0	H	N/A	N/A	N/A
2480.0	EDR	9920.0	V	N/A	N/A	N/A
2480.0	EDR	2483.5	H	45.8	54.0	-8.2
2480.0	EDR	2483.5	V	52.4	54.0	-1.6

**Figure 75. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Intermodulation Radiated Emission

E.U.T Description Rider Communication System
Type scala rider PACKETALK
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
Test Distance: 3 meters Detector: Peak
Frequency: 2405 MHz + 2402 MHz

Frequency (MHz)	Modulation	Polarity (H/V)	Peak Reading (dBμV/m)	Peak Specification (dB μV/m)	Peak Margin (dB)
2399.0	PT + standard	H	57.1	73.0	-15.9
2399.0	PT + standard	V	74.3	80.0	-5.7
2396.0	PT + standard	H	52.5	73.0	-20.5
2396.0	PT + standard	V	73.6	80.0	-6.4
2393.0	PT + standard	H	52.7	73.0	-20.3
2393.0	PT + standard	V	73.7	80.0	-6.3
2390.0	PT + standard	H	64.1	74.0	-9.9
2390.0	PT + standard	V	68.3	74.0	-5.7

**Figure 76. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Peak**

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



Intermodulation Radiated Emission

E.U.T Description Rider Communication System
Type scala rider PACKETALK
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 25.0 GHz
Test Distance: 3 meters Detector: Average
Frequency: 2405 MHz + 2402 MHz

Frequency (MHz)	Modulation	Polarity (H/V)	AVG. Reading (dBμV/m)	AVG. Specification (dB μV/m)	AVG. Margin (dB)
2399.0	PT + standard	H	N/A	N/A	N/A
2399.0	PT + standard	V	N/A	N/A	N/A
2396.0	PT + standard	H	N/A	N/A	N/A
2396.0	PT + standard	V	N/A	N/A	N/A
2393.0	PT + standard	H	N/A	N/A	N/A
2393.0	PT + standard	V	N/A	N/A	N/A
2390.0	PT + standard	H	41.1	54.0	-12.9
2390.0	PT + standard	V	43.1	54.0	-10.9

**Figure 77. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

13.4 Test Instrumentation Used; Radiated Measurements

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	R&S	ESIB7	100120	December 19, 2013	1 year
Spectrum Analyzer	R&S	FSL6	100194	December 1, 2013	1 year
Active Loop Antenna	EMCO	6502	9506-2950	November 4, 2014	1 year
Biconilog Antenna	EMCO	3142B	1250	May 22, 2014	2 years
Horn Antenna	ETS	3115	6142	March 14, 2012	3 years
Horn Antenna	ARA	SWH-28	1007	March 30, 2014	3 years
Spectrum Analyzer	HP	8592L	3826A01204	February 28, 2014	1 year
Spectrum Analyzer	HP	8564E	3442A00275	March 2, 2014	1 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	August 22, 2014	1 year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	August 29, 2014	1 year
Antenna Mast	ETS	2070-2	9608-1497	N/A	N/A
Turntable	ETS	2087	-	N/A	N/A
Mast & Table Controller	ETS/EMCO	2090	9608-1456	N/A	N/A

Figure 78 Test Equipment Used

13.5 **Field Strength Calculation 30 – 1000 MHz**

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$[\text{dB}\mu\text{V/m}] \text{ FS} = \text{RA} + \text{AF} + \text{CF}$$

FS: Field Strength $[\text{dB}\mu\text{V/m}]$

RA: Receiver Amplitude $[\text{dB}\mu\text{V}]$

AF: Receiving Antenna Correction Factor $[\text{dB/m}]$

CF: Cable Attenuation Factor $[\text{dB}]$

Example: $\text{FS} = 30.7 \text{ dB}\mu\text{V (RA)} + 14.0 \text{ dB (AF)} + 0.9 \text{ dB (CF)} = 45.6 \text{ dB}\mu\text{V}$

No external pre-amplifiers are used.



14. Antenna Gain/Information

The antenna gain is 1.7 dBi, integral.

Can work with both antennas – 0 dbi and 1.7 dbi - moshe 12-23

Power of 113 dBuV/m was from standard external – so which one is this 1.7 dbi ?

15. R.F Exposure/Safety

Typical use of the E.U.T. is as a Rider Communication System. The typical placement of the E.U.T. is on a motorcycle helmet. See photo on next page. The distance between the E.U.T. and the user in the worst case application, is 3 cm.

Calculation of Maximum Permissible Exposure (MPE) Based on Section 1.1310 Requirements

(a) FCC limits at 2480 MHz is: $1 \frac{mW}{cm^2}$

Using table 1 of Section 1.1310 limit for general population/uncontrolled exposures, the above level is an average over 30 minutes.

(b) The power density produced by the E.U.T. is

$$S = \frac{P_t G_t}{4\pi R^2}$$

P_t- Transmitted Power 113.0 dBuV/m = 60.26 mW

G_T- Antenna Gain, 1.7 dBi = testing performed radiated, power results include antenna gain

R- Distance from Transmitter using 3 cm worst case

(c) The peak power density is :

$$S = \frac{60.26}{4\pi(3)^2} = 0.532 \frac{mW}{cm^2}$$

(d) This is below the FCC limit.

16. APPENDIX B - CORRECTION FACTORS

16.1 Correction factors for CABLE

from EMI receiver
to test antenna
at 3 meter range.

Frequency (MHz)	Cable Loss (dB)	Frequency (MHz)	Cable Loss (dB)
0.010	0.4	50.00	1.2
0.015	0.2	100.00	0.7
0.020	0.2	150.00	20.1
0.030	0.3	200.00	2.3
0.050	0.3	300.00	2.9
0.075	0.3	500.00	3.8
0.100	0.2	750.00	4.8
0.150	0.2	1000.00	5.4
0.200	0.3	1500.00	6.7
0.500	0.4	2000.00	9.0
1.00	0.4	2500.00	9.4
1.50	0.5	3000.00	9.9
2.00	0.5	3500.00	10.2
5.00	0.6	4000.00	11.2
10.00	0.8	4500.00	12.1
15.00	0.9	5000.00	13.1
20.00	0.8	5500.00	13.5
		6000.00	14.5

NOTES:

1. The cable type is SPUMA400 RF-11N(X2) and 39m long
2. The cable is manufactured by Huber + Suhner

16.2 Correction factors for CABLE

from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

NOTES:

1. The cable type is RG-8.
2. The overall length of the cable is 10 meters.

16.3 Correction factors for CABLE

from spectrum analyzer
to test antenna above 2.9 GHz

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

NOTES:

1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.
2. The cable is used for measurements above 2.9 GHz.
3. The overall length of the cable is 10 meters.

16.4 Correction factors for

Bilog ANTENNA

Model: 3142

Antenna serial number: 1250

3 meter range

FREQUENCY	AFE	FREQUENCY	AFE
(MHz)	(dB/m)	(MHz)	(dB/m)
30	18.4	1100	25
40	13.7	1200	24.9
50	9.9	1300	26
60	8.1	1400	26.1
70	7.4	1500	27.1
80	7.2	1600	27.2
90	7.5	1700	28.3
100	8.5	1800	28.1
120	7.8	1900	28.5
140	8.5	2000	28.9
160	10.8		
180	10.4		
200	10.5		
250	12.7		
300	14.3		
400	17		
600	19.6		
700	21.1		
800	21.4		
900	23.5		
1000	24.3		

16.5 Correction factors for Horn ANTENNA.

Model: 3115

Antenna serial number: 6142

3 meter range

FREQUENCY	Antenna Factor	FREQUENCY	Antenna Factor
(MHz)	(dB/m)	(MHz)	(dB/m)
1000	23.9	10500	38.4
1500	25.4	11000	38.5
2000	27.3	11500	39.4
2500	28.5	12000	39.2
3000	30.4	12500	39.4
3500	31.6	13000	40.7
4000	33	14000	42.1
4500	32.7	15000	40.1
5000	34.1	16000	38.2
5500	34.5	17000	41.7
6000	34.9	17500	45.7
6500	35.1	18000	47.7
7000	35.9		
7500	37.5		
8000	37.6		
8500	38.3		
9000	38.5		
9500	38.1		
10000	38.6		

16.6 Correction factors for

LOG PERIODIC ANTENNA

Type LPD 2010/A at 3 and 10 meter ranges.

Distance of 3 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

Distance of 10 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.0
250.0	10.1
300.0	11.8
400.0	15.3
500.0	15.6
600.0	18.7
700.0	19.1
800.0	20.2
900.0	21.1
1000.0	23.2

NOTES:

1. Antenna serial number is 1038.
2. The above lists are located in file number 38M30.ANT for a 3 meter range,
and file number 38M100.ANT for a 10 meter range.
3. The files mentioned above are located on the disk marked "Radiated Emission
Test EMI Receiver".

16.7 Correction factors for Double-Ridged Waveguide Horn

**Model: 3115, S/N 29845
at 3 meter range.**

FREQUENCY	ANTENNA	ANTENN	FREQUENCY	ANTENNA	ANTENNA
(GHz)	FACTOR	A Gain	(GHz)	FACTOR	Gain
	(dB 1/m)	(dBi)		(dB 1/m)	(dBi)
1.0	24.8	5.4	10.0	38.8	11.4
1.5	26.1	7.6	10.5	38.9	11.8
2.0	28.6	7.7	11.0	39.0	12.1
2.5	29.8	8.4	11.5	39.6	11.8
3.0	31.4	8.4	12.0	39.8	12.0
3.5	32.4	8.7	12.5	39.6	12.5
4.0	33.7	8.6	13.0	40.0	12.5
4.5	33.4	9.9	13.5	39.8	13.0
5.0	34.5	9.7	14.0	40.2	13.0
5.5	35.1	9.9	14.5	40.6	12.9
6.0	35.4	10.4	15.0	41.3	12.4
6.5	35.6	10.8	15.5	39.5	14.6
7.0	36.2	10.9	16.0	38.8	15.5
7.5	37.3	10.4	16.5	40.0	14.6
8.0	37.7	10.6	17.0	41.4	13.4
8.5	38.3	10.5	17.5	44.8	10.3
9.0	38.5	10.8	18.0	47.2	8.1
9.5	38.7	11.1			

16.8 Correction factors for

**Horn Antenna
Model: SWH-28
at 1 meter range.**

FREQUENCY (GHz)	APE (dB /m)	Gain (dB1)
18.0	40.3	16.1
19.0	40.3	16.3
20.0	40.3	16.1
21.0	40.3	16.3
22.0	40.4	16.8
23.0	40.5	16.4
24.0	40.5	16.6
25.0	40.5	16.7
26.0	40.6	16.4

16.9 Correction factors for ACTIVE LOOP ANTENNA
Model 6502
S/N 9506-2950

FREQUENCY	Magnetic Antenna Factor	Electric Antenna Factor
(MHz)	(dB)	(dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2

17. Comparison Industry Canada Requirements With FCC

Cardo Peripheral Systems M/N: scala rider PACKTALK
IC: 4668A-ER19 FCC ID: Q95ER19

Test	FCC	IC
<input type="checkbox"/> Radiated Emission	15.209	RSS 210 Issue 8 Clause 2.5
<input type="checkbox"/> Max power / Peak power	15.247(b)(3)	RSS 210 Issue 8 A8.4(4)
<input type="checkbox"/> 6dB BW	15.247(a)2	RSS 210 Issue 8 A8.2a
<input type="checkbox"/> Power density	15.247(e)	RSS 210 Issue 8 A8.2b
<input type="checkbox"/> Spurious radiated emission in the restricted band	15.205(c)	RSS 210 Issue 8 2.5 RSS Gen 7.2.2 (Table 1)
<input type="checkbox"/> Band edge spectrum	15.247(d)	RSS 210 Issue 8 A8.5
<input type="checkbox"/> RF Exposure Limits	1.1310	RSS 102 4.4