




DATE: 19 November 2018


**I.T.L. (PRODUCT TESTING) LTD.
FCC/IC Radio Test Report
for
Cardo Systems Ltd.**

Equipment under test:

**Bluetooth Communication System
for Motorcycles**

**Original: scala rider FREECOM 4
New: FREECOM 4+**

Tested by: 
M. Zohar

Approved by: 
D. Shidlow

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.



Measurement/Technical Report for Cardo Systems Ltd.

Bluetooth Communication System for Motorcycles

Original: scala rider FREECOM 4

New: FREECOM 4+

FCC ID: Q95ER22

IC: 4668A-ER22

This report concerns:	Original Grant:	
	Class I Change:	
	Class II Change:	X

Equipment type:	FCC: DSS Part 15 Spread Spectrum Transmitter IC: Spread Spectrum Digital Device (2400-2483.5)
-----------------	--

Limits used:	47CFR15 Section 15.247 RSS 247, Issue 2, February 2017, Section 5 RSS-Gen, Issue 5, April 2018
--------------	--

Measurement procedures used are FCC Public Notice DA-00-705 and ANSI C63.10: 2013.

Application for Certification prepared by:	Applicant for this device: (different from "prepared by")
R. Pinchuck	Amit Davidson
ITL (Product Testing) Ltd.	Cardo Systems Ltd.
1 Bat Sheva Street	811 E. Plano Parkway, Suite 110A
Lod 7116002	Plano, Texas, USA, 75074
Israel	Tel: +1 (214) 396-1196
e-mail Rpinchuck@itlglobal.org	Fax: +1 (214) 276-7844
	Email: amitd@cardosystems.com



TABLE OF CONTENTS

1.	GENERAL INFORMATION	4
1.1	Administrative Information	4
1.2	List of Accreditations	5
1.3	Product Description	6
1.4	Test Methodology	6
1.5	Test Facility	6
1.6	Measurement Uncertainty	6
2.	SYSTEM TEST CONFIGURATION	7
2.1	Justification	7
2.2	EUT Exercise Software	8
2.3	Special Accessories	8
2.4	Equipment Modifications	8
2.5	Configuration of Tested System	8
3.	CONDUCTED & RADIATED MEASUREMENT TEST SET-UP PHOTOS	10
4.	OCCUPIED BANDWIDTH	12
4.1	Test Specification	12
4.2	Test Procedure	12
4.3	Test Limit	12
4.4	Test Results	12
4.5	Test Equipment Used, Occupied Bandwidth	15
5.	PEAK OUTPUT POWER	16
5.1	Test Specification	16
5.2	Test Procedure	16
5.3	Test Limit	16
5.4	Test Results	16
5.5	Test Equipment Used, Radiated Maximum Power Output	18
6.	SPURIOUS RADIATED EMISSIONS	19
6.1	Test Specification	19
6.2	Test Procedure	19
6.3	Test Limit	20
6.4	Test Results	20
6.5	Test Equipment Used, Spurious Radiated Emissions	23
7.	AVG. FACTOR CALCULATION	24
7.1	Test Equipment Used, Average Factor	26
8.	R.F EXPOSURE/SAFETY	27
9.	APPENDIX A - CORRECTION FACTORS	29
9.1	Correction factors for RF OATS Cable 35m ITL #1879	29
9.2	Correction factor for RF CABLE for Semi Anechoic Chamber	30
9.3	Correction factors for Active Loop Antenna	31
9.4	Correction factors for biconical antenna – ITL # 1356	32
9.5	Correction factors for log periodic antenna – ITL # 1349	33
9.6	Correction factors for Double –Ridged Waveguide Horn ANTENNA	34
9.7	Correction factors for Horn Antenna	35



1. General Information

1.1 Administrative Information

Manufacturer: Cardo Systems Ltd.

Manufacturer's Address: 811 E. Plano Parkway
Suite 110A
Plano, Texas USA, 75074
Tel: +1 (214) 396-1196
Fax: +1 (214) 276-7844

Manufacturer's Representative: Amit Davidson

Equipment Under Test (E.U.T): Bluetooth Communication System for Motorcycles

Equipment PMN: Original: scala rider FREECOM 4
New: FREECOM 4+

Equipment Serial No.: Not designated

HVIN: 1

Date of Receipt of E.U.T: July 26, 2018

Start of Test: July 26, 2018

End of Test: October 7, 2018

Test Laboratory Location: I.T.L (Product Testing) Ltd.
1 Batsheva St.,
Lod
ISRAEL 7120101

Test Specifications: 47CFR15 Section 15.247
RSS 247, Issue 2, February 2017, Section 5
RSS-Gen, Issue 5, April 2018



1.2 **List of Accreditations**

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), FCC Designation No. IL1005.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. Industry Canada (Canada), IC File No.: 46405-4025; Site Nos. IC 4025A-1, IC 4025A-2.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.



1.3 Product Description

This product is a Bluetooth communication system, Bluetooth intercom for motorbikes and FM Radio receiver.

1.4 Test Methodology

Radiated testing was performed according to the procedures in FCC Public Notice DA 00-705 and ANSI C63.10: 2013. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

Emissions tests were performed at I.T.L.'s testing facility in Lod, Israel. I.T.L.'s EMC Laboratory is accredited by A2LA, certificate No. 1152.01 and its FCC Designation Number is IL1005.

1.6 Measurement Uncertainty

Conducted Emission

Conducted Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4)
0.15 – 30 MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 3.6 dB

Radiated Emission

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4)
for open site:

30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 4.96 dB

1 GHz to 6 GHz

Expanded Uncertainty (95% Confidence, K=2):

±5.19 dB

>6 GHz

Expanded Uncertainty (95% Confidence, K=2):

±5.51 dB



2. System Test Configuration

2.1 *Justification*

1. The E.U.T. was originally FCC certified on 02/14/2017 under FCC ID: Q95ER22 and IC certified on 1/31/2017 under IC: 4668A-ER22.
2. Currently, C2PC changes were made to the original E.U.T. which will now be known as the FREECOM 4+. See customer's declaration of changes on page 9.
3. A C2PC is requested based on those changes. The following tests were performed: occupied bandwidth, peak output power and spurious radiated emissions.
4. The E.U.T. met the requirements of a C2PC.
5. The E.U.T contains an IEEE 802.15.1 standard (STD/EDR) transceiver.
6. The unit was evaluated while transmitting at the low channel (2402MHz), the mid channel (2440MHz) and the high channel (2480MHz).
7. Conducted emission method performed with connection to spectrum analyzer via 30dB attenuator.
8. Final radiated emission test for spurious emission for the new model was performed after exploratory emission testing that was performed in 3 orthogonal polarities to determine the "worst case" radiation.
9. According to the following results the worst case axis was the Y axis for all channels.

Orientation	Frequency	2 nd Harmonic	3 rd Harmonic
	(MHz)	(dBuV/m)	(dBuV/m)
X axis	2402.0	50.5	59.0
	2440.0	49.9	58.1
	2480.0	52.7	53.9
Y axis	2402.0	52.4	62.9
	2440.0	51.5	63.1
	2480.0	52.9	57.9
Z axis	2402.0	47.0	59.1
	2440.0	50.1	60.9
	2480.0	50.0	51.6

Figure 1. Screening Results

2.2 EUT Exercise Software

No special exercise software was used.

2.3 Special Accessories

No special accessories were needed in order to achieve compliance.

2.4 Equipment Modifications

No modifications were needed in order to achieve compliance.

2.5 Configuration of Tested System




Figure 2. Configuration of Tested System, Radiated




Figure 3. Configuration of Tested System, Conducted



Date: June 13, 2018

To: FCC

FCC: Q95ER22

To whom it may concern,

The previously certified device, the scala rider FREECOM2 & FREECOM4 received FCC certification on FEB 14, 2017 under FCC: Q95ER22.

Subsequently, in the new device, the FREECOM 4+, the following changes were made:

1. Added some new decorative mechanical feature to the housing.
2. Added U11 – Optimize charger protection.
3. Added SW5 – encoder for volume settings.
4. Adding the following passive for U11 component operation:
R93,C18,C108,C116,L5,C117,C109,C110,R96,R95,C118

Thank you,

Amit Davidson, HW manager

Cardo Systems, Ltd.
814 E. Plano Parkway, Ste. 110a
Plano, TX, 75074, USA

3. Conducted & Radiated Measurement Test Set-Up Photos



Figure 4. Conducted Emission Test



Figure 5. Radiated Emission Test, 30-200MHz



Figure 6. Radiated Emission Test, 200-1000MHz



Figure 7. Radiated Emission Test, 1-18GHz

4. Occupied Bandwidth

4.1 Test Specification

F.C.C. Part 15, Subpart C: section 2.1048
RSS Gen, Issue 4, November 2014

4.2 Test Procedure

(Temperature (22°C)/ Humidity (60%RH))

The E.U.T operation mode and test set-up are as described in Section 2 of this report. The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator and an appropriate coaxial cable. The spectrum analyzer was set to the following parameters:

Span = ~ 1.5 to 5 times the OBW

RBW = between 1% to 5% of the OBW

Detector Function: Peak, Trace: Maximum Hold.

4.3 Test Limit

N/A


4.4 Test Results

Unit type	Modulation	Operation Frequency (MHz)	Bandwidth Reading (kHz)
4+	STD	2402.0	880.24
		2440.0	904.19
		2480.0	904.19
	EDR	2402.0	1281.4
		2440.0	1287.4
		2480.0	1227.5

Figure 8 Test Results


JUDGEMENT: Passed

For additional information see *Figure 9* to *Figure 11*.

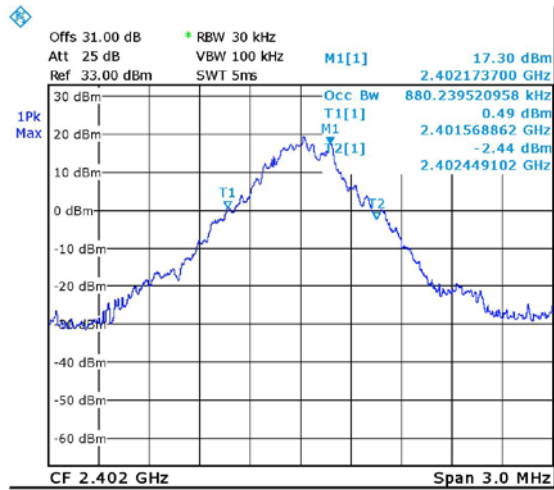


Date: 26.JUL.2018 14:09:55

Figure 9. STD, Low

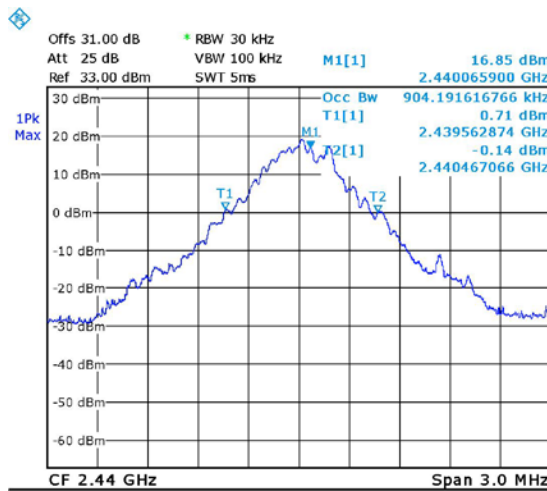


Date: 26.JUL.2018 14:09:16

Figure 10. STD, Mid

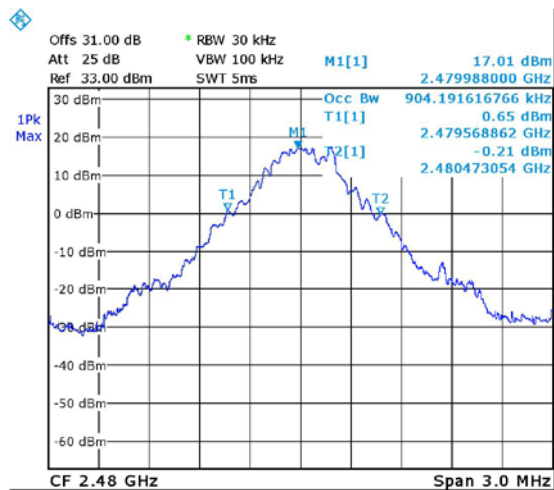


Date: 26.JUL.2018 14:06:53

Figure 11. STD, High

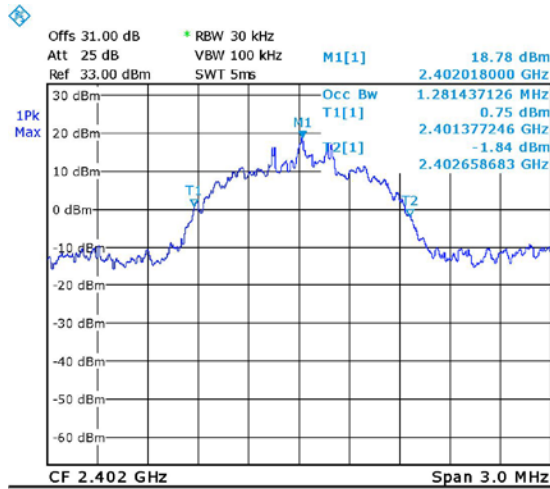


Date: 26.JUL.2018 14:04:08

Figure 12. EDR, Low

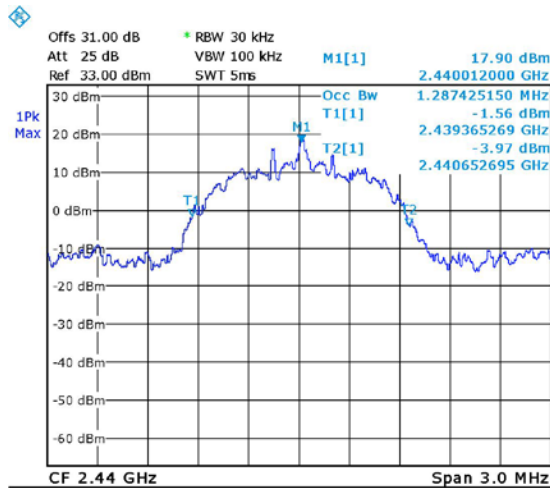

Date: 26.JUL.2018 14:04:38

Figure 13. EDR, Mid

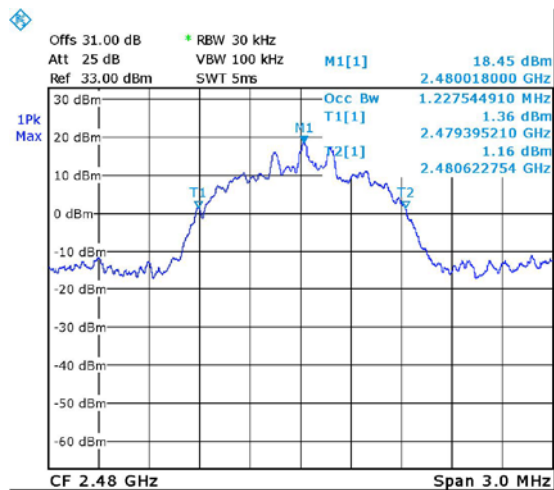

Date: 26.JUL.2018 14:05:48

Figure 14. EDR, High



4.5 Test Equipment Used, Occupied Bandwidth

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Next Calibration Due
RF Cable	Commscope ORS	0623 WBC- 400	G020132-	October 1, 2017	October 31, 2018
30dB Attenuator	MCL	BW-S30W5	533	October 1, 2017	October 31, 2018
Spectrum Analyzer	Rohde & Schwarz	FSL6	100194	February 19, 2018	February 19, 2019
RF Cable (OATS)	EIM	RG214- 11N(X2)	-	August 13, 2018	August 31, 2019

Figure 15 Test Equipment Used



5. Peak Output Power

5.1 Test Specification

F.C.C. Part 15, Subpart C: section 15.247(b)(1)
RSS 247, Issue 2, Clause 5.4(2)

5.2 Test Procedure

(Temperature (22°C)/ Humidity (60%RH))

The E.U.T operation mode and test set-up are as described in Section 2 of this report. The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator and an appropriate coaxial cable.

5.3 Test Limit

The maximum peak conducted output power of the intentional radiator shall not exceed the following: For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. (The limits above applies to antenna gain until 6dBi).

5.4 Test Results

JUDGEMENT: Passed by 912.9 mW



Unit	Modulation	Operation Frequency	Power	Power	Limit	Margin
(Original/New)		(MHz)	(dBm)	(mW)	(mW)	(mW)
Original	Basic	2402.0	19.9	97.7	1000.0	-902.3
		2440.0	20.0	100.0	1000.0	-900.0
		2480.0	19.5	89.1	1000.0	-910.9
	EDR	2402.0	18.1	64.6	1000.0	-935.4
		2440.0	18.3	67.6	1000.0	-932.4
		2480.0	17.5	56.2	1000.0	-943.8
New (4+)	Basic	2402.0	18.0	63.1	1000.0	-936.9
		2440.0	19.4	87.1	1000.0	-912.9
		2480.0	19.3	85.1	1000.0	-914.9
	EDR	2402.0	18.0	63.1	1000.0	-936.9
		2440.0	18.1	64.6	1000.0	-935.4
		2480.0	17.1	51.3	1000.0	-948.7

Figure 16 Radiated Power Output Test Results



5.5 Test Equipment Used, Radiated Maximum Power Output

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Next Calibration Due
RF Cable	Huber Suner	Sucofelex	27502/4 PEA	October 1, 2017	October 31, 2018
30dB Attenuator	MCL	BW-S30W5	533	October 1, 2017	October 31, 2018
Spectrum Analyzer	Rohde & Schwarz	FSL6	100194	February 19, 2018	February 19, 2019

Figure 17 Test Equipment Used



6. Spurious Radiated Emissions

6.1 Test Specification

FCC, Part 15, Subpart C, Sections 247(d), 15.205, 15.209
RSS Gen, Issue 4, Section 8.10

6.2 Test Procedure

(Temperature (22°C)/ Humidity (60%RH))

For measurements between 0.009MHz-30MHz:

The E.U.T was tested inside the shielded room at a distance of 3 meters and the E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The frequency range 0.009MHz-30MHz was scanned. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization. The emissions were measured at a distance of 3 meters.

For measurements between 30.0MHz-1.0GHz:

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The frequency range 30.0MHz -1.0GHz was scanned and the list of the highest emissions was verified and updated accordingly. The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. The emissions were measured at a distance of 3 meters.

For measurements between 1.0GHz-25.0GHz:

The E.U.T was tested inside the shielded room at a distance of 3 meters and the E.U.T was placed on a non-metallic table, 1.5 meters above the ground. The frequency range 1.0GHz -25.0GHz was scanned. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization. The emissions were measured at a distance of 3 meters.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.



6.3 Test Limit

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	Field strength* (dBµV/m)	Field strength* (dBµV/m)@3m
0.009-0.490	2400/F(kHz)	300	48.5-13.8	128.5-73.8
0.490-1.705	24000/F(kHz)	30	33.8-23.0	73.8-63.0
1.705-30.0	30	30	29.5	69.5
30-88	100	3	40.0	40.0
88-216	150	3	43.5	43.5
216-960	200	3	46.0	46.0
Above 960	500	3	54.0	54.0

*The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

6.4 Test Results

JUDGEMENT: Passed

The EUT met the requirements of the F.C.C. Part 15, Subpart C 209 and RSS Gen, Issue 4, Section 8.10 specification.

For additional information see *Figure 18* and *Figure 19*.



Spurious Radiated Emission

Specification: FCC, Part 15, Subpart C; Sections 15.209, 15.205, 15.247(d);
RSS Gen, Issue 4, Section 8.10

Antenna Polarization: Horizontal/Vertical
Protocol type: STD

Frequency range: 9 kHz to 25.0 GHz
Detectors: Peak

Unit	Operation Frequency	Freq.	Pol	Peak Reading	Peak Limit	Peak Margin
(Original/New)	(MHz)	(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
Original	2402.0	4804.0	V	55.1	74.0	-18.9
		4804.0	H	58.6	74.0	-15.4
		7206.0	V	61.0	74.0	-13.0
		7206.0	H	70.0	74.0	-4.0
	2440.0	4880.0	V	55.3	74.0	-18.7
		4880.0	H	60.0	74.0	-14.0
		7320.0	V	57.4	74.0	-16.6
		7320.0	H	69.8	74.0	-4.2
	2480.0	4960.0	V	54.4	74.0	-19.6
		4960.0	H	61.6	74.0	-12.4
		7440.0	V	56.5	74.0	-17.5
		7440.0	H	69.9	74.0	-4.1
New (4+)	2402.0	4804.0	V	56.1	74.0	-17.9
		4804.0	H	56.1	74.0	-17.9
		7206.0	V	63.6	74.0	-10.4
		7206.0	H	65.9	74.0	-8.1
	2440.0	4880.0	V	56.4	74.0	-17.6
		4880.0	H	62.9	74.0	-11.1
		7320.0	V	68.0	74.0	-6.0
		7320.0	H	70.2	74.0	-3.8
	2480.0	4960.0	V	50.5	74.0	-23.5
		4960.0	H	62.2	74.0	-11.8
		7440.0	V	59.4	74.0	-14.6
		7440.0	H	70.4	74.0	-3.6

Figure 18. Radiated Emission Results - basic



Spurious Radiated Emission

Specification: FCC, Part 15, Subpart C; Sections 15.209, 15.205, 15.247(d);
RSS Gen, Issue 4, Section 8.10

Antenna Polarization: Horizontal/Vertical
Protocol type: EDR

Frequency range: 9 kHz to 25.0 GHz
Detectors: Peak

Unit	Operation Frequency	Freq.	Pol	Peak Reading	Peak Limit	Peak Margin
(Original/New)	(MHz)	(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
Original	2402.0	4804.0	V	54.7	74.0	-19.3
		4804.0	H	57.9	74.0	-16.1
		7206.0	V	59.3	74.0	-14.7
		7206.0	H	70.4	74.0	-3.6
	2440.0	4880.0	V	55.9	74.0	-18.1
		4880.0	H	62.4	74.0	-11.6
		7320.0	V	55.1	74.0	-18.9
		7320.0	H	70.9	74.0	-3.1
	2480.0	4960.0	V	55.5	74.0	-18.5
		4960.0	H	61.2	74.0	-12.8
		7440.0	V	56.5	74.0	-17.5
		7440.0	H	71.2	74.0	-2.8
New (4+)	2402.0	4804.0	V	55.0	74.0	-19.0
		4804.0	H	59.0	74.0	-15.0
		7206.0	V	57.1	74.0	-16.9
		7206.0	H	73.2	74.0	-0.8
	2440.0	4880.0	V	56.2	74.0	-17.8
		4880.0	H	64.0	74.0	-10.0
		7320.0	V	54.9	74.0	-19.1
		7320.0	H	73.5	74.0	-0.5
	2480.0	4960.0	V	55.9	74.0	-18.1
		4960.0	H	62.7	74.0	-11.3
		7440.0	V	56.2	74.0	-17.8
		7440.0	H	72.9	74.0	-1.1

Figure 19. Radiated Emission Results – EDR



Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

6.5 Test Equipment Used, Spurious Radiated Emissions

Instrument	Manufacturer	Model	Serial Number	Last Calibration Date	Next Calibration Due
EMI Receiver	R&S	ESCI7	100724	February 19, 2018	February 19, 2019
Spectrum Analyzer	HP	8592L	3826A01204	February 19, 2018	February 19, 2019
EMI Receiver	HP	8542E	3906A00276	February 19, 2018	February 19, 2019
RF Filter section	HP	85420E	3705A00248	February 19, 2018	February 19, 2019
Horn Antenna	ETS	3115	29845	May 31, 2018	May 31 2021
Horn Antenna	ARA	SWH-28	1007	December 13, 2017	December 13, 2020
Log Periodic Antenna	EMCO	3146	9505-4081	May 31, 2018	May 31, 2019
Biconical Log Antenna	EMCO	3110B	9912-3337	May 15, 2017	May 15, 2019
Active Loop Antenna	EMCO	6502	9506-2950	October 19, 2017	October 31, 2018
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	October 1, 2017	October 31, 2018
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	October 1, 2017	October 31, 2018
RF Cable	Commscope ORS	0623 WBC-400	G020132-	October 1, 2017	October 31, 2018
RF Cable (OATS)	EIM	RG214-11N(X2)	-	August 13, 2018	August 31, 2019
Semi Anechoic Civil Chamber	ETS	S81	SL 11643	NCR	NCR
Antenna Mast	ETS	2070-2	9608-1497	NCR	NCR
Turntable	ETS	2087	-	NCR	NCR
Mast & Table Controller	ETS/EMCO	2090	9608-1456	NCR	NCR

Figure 20 Test Equipment Used




7. Avg. Factor Calculation

1. Pulse period = 1msec (worst scenario)
2. Pulse duration = 1 msec (worst scenario)
3. Burst duration of Standard modulation =0.396msec
4. Burst duration of EDR modulation =2.92msec

$$5. \text{ Average Factor} = 20 \log \left[\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{burst duration}}{100\text{msec}} \times \text{Num of burst within 100msec} \right]$$

$$\text{Average Factor} = 20 \log \left[1 * \frac{.369}{100} * 2 \right] = -42.6\text{dB} \text{ for Standard modulation}$$

$$\text{Average Factor} = 20 * \log \left[\frac{2.92}{100} * 1 \right] = -30.69\text{dB} \text{ for EDR modulation}$$

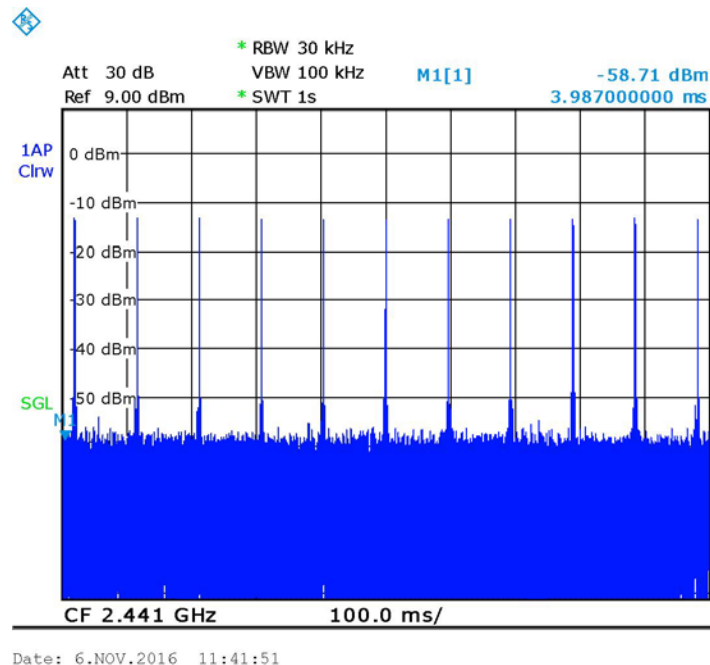

Date: 6.NOV.2016 11:41:51

Figure 21 — Number of Bursts in 100m sec=2 standard modulation

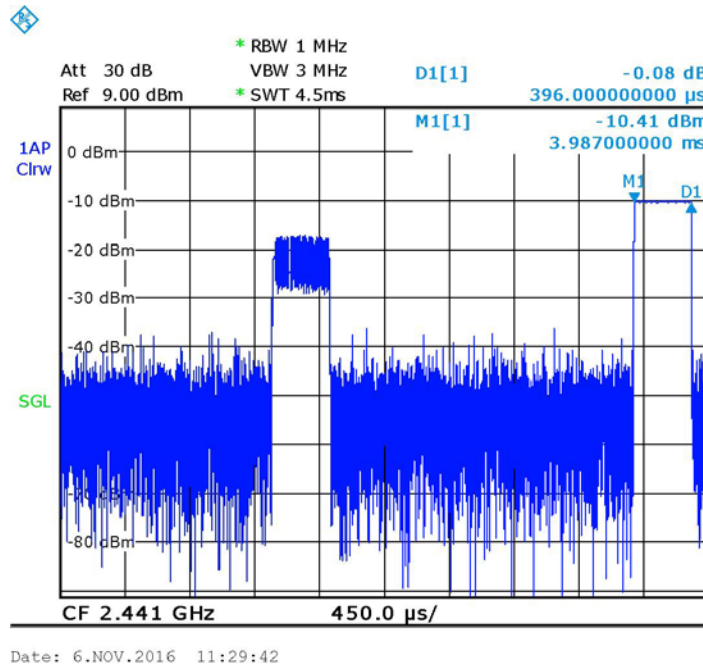


Figure 22 — Burst Duration =.396mS standard modulation

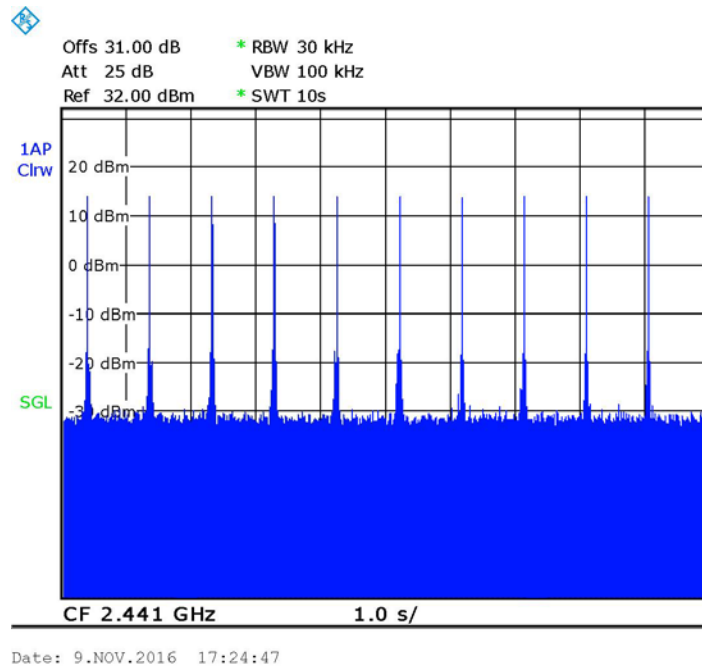


Figure 23 — Number of Bursts in 10 sec=10 EDR modulation

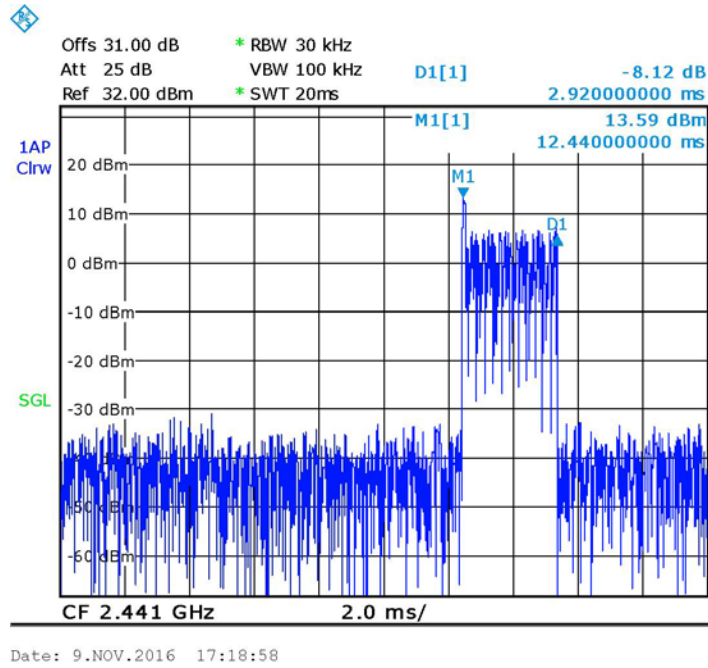


Figure 24 — Burst Duration =2.92ms EDR modulation

7.1 Test Equipment Used, Average Factor

Instrument	Manufacturer	Model	Serial Number	Last Calibration Date	Next Calibration Due
Spectrum Analyzer	Rodhe & Schwarz	FSL6	100194	February 29, 2016	March 1, 2017
30dB Attenuator	Bird	8304-N30DB	533	June 1, 2016	June 1, 2017

Figure 25 Test Equipment Used



8. R.F Exposure/Safety

The typical placement of the E.U.T. is on a motorcycle helmet. The typical distance between the E.U.T. and the user is 4cm. See photos on following page.

SAR Testing Exclusion Based on Section 4.3.1 and Appendix A of KDB447498 D01 V05 and RSS 102, Issue 5, Section 2.5.2 Requirements

For FCC

Section 4.3.1 and Appendix A of KDB447498 D01 V05 was used as the guidance as follows:

Peak power output = 19.4 dBm = 87.1mW

Taking into account the -42.6dB AVG factor (page 24)

Peak power = 19.4 - 42.6 = -23.2 dBm = 0.005 mW

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})}] =$

$= 0.005 / 40 * 1.55 = 0.00019$ this value is less than 3.0 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR.

The SAR measurement is not necessary.

For IC

(a) For IC per Table 1 of RSS 102 Issue 5, SAR exemption based on IC limit of 173.0mW at a separation distance of 40mm = 4.0cm at 2450 MHz.


EUT power transmission is 19.4 dBm = 87.1mW

Taking into account the -42.6dB AVG factor (page 24)

peak power = 19.4 - 42.6 = -23.2 dBm = 0.005 mW

This is within the 173.0mW SAR exemption limits.

See photos on following page.

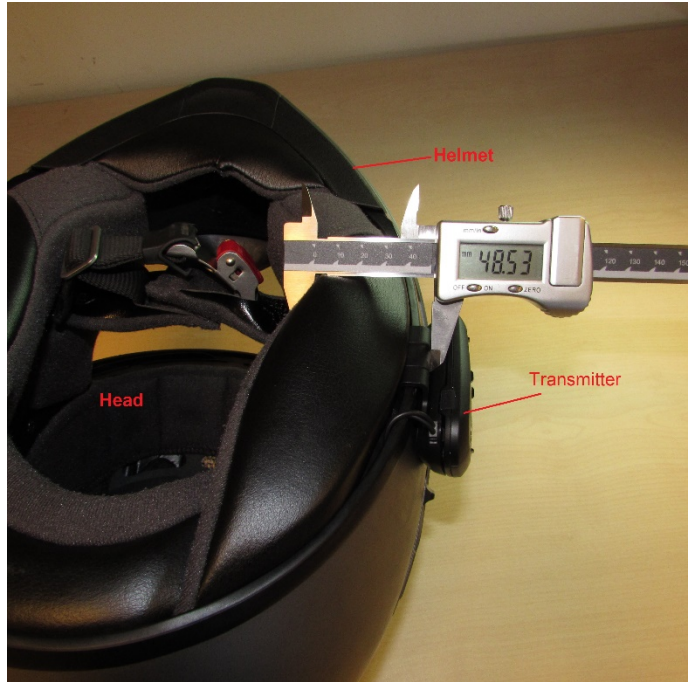



9. APPENDIX A - CORRECTION FACTORS

9.1 Correction factors for *RF OATS Cable 35m ITL #1879*

Frequency (MHz)	Cable loss (dB)
30.0	1.1
50.0	1.1
100.0	1.7
150.0	2.1
200.0	2.5
250.0	2.7
300.0	2.9
350.0	3.1
400.0	3.5
450.0	3.7
500.0	3.9
550.0	4.0
600.0	4.2
650.0	4.4
700.0	4.9
750.0	5.0
800.0	5.0
850.0	4.9
900.0	5.0
950.0	5.1
1000.0	5.4



9.2 Correction factor for RF CABLE for Semi Anechoic Chamber

ITL # 1841

FREQ (MHz)	LOSS (dB)
1000.0	1.5
2000.0	2.1
3000.0	2.7
4000.0	3.1
5000.0	3.5
6000.0	4.1
7000.0	4.6
8000.0	4.9
9000.0	5.7
10000.0	5.7
11000.0	6.1
12000.0	6.1
13000.0	6.2
14000.0	6.7
15000.0	7.4
16000.0	7.5
17000.0	7.9
18000.0	8.1
19000.0	8.8
20000.0	9.1

NOTES:

- 1. The cable is manufactured by Commscope*
- 2. The cable type is 0623 WBC-400, serial # G020132 and 10m long*



9.3 Correction factors for Active Loop Antenna

Model 6502 S/N 9506-2950

ITL # 1075:

f(MHz)	MAF(dBs/m)	AF(dB/m)
0.01	-33.1	18.4
0.02	-37.2	14.3
0.03	-38.2	13.3
0.05	-39.8	11.7
0.1	-40.1	11.4
0.2	-40.3	11.2
0.3	-40.3	11.2
0.5	-40.3	11.2
0.7	-40.3	11.2
1	-40.1	11.4
2	-40	11.5
3	-40	11.5
4	-40.1	11.4
5	-40.2	11.3
6	-40.4	11.1
7	-40.4	11.1
8	-40.4	11.1
9	-40.5	11
10	-40.5	11
20	-41.5	10
30	-43.5	8



9.4 Correction factors for biconical antenna – ITL # 1356

Model: EMCO 3110B

Serial No.:9912-3337

Frequency [MHz]	ITL 1356 AF [dB/m]
30	13.00
35	10.89
40	10.59
45	10.63
50	10.12
60	9.26
70	7.74
80	6.63
90	8.23
100	11.12
120	13.16
140	13.07
160	14.80
180	16.95
200	17.17



9.5 Correction factors for log periodic antenna – ITL # 1349

Model: EMCO 3146

Serial No.:9505-4081

Frequency	ITL 1349 AF
[MHz]	[dB/m]
200	11.58
250	12.04
300	14.76
400	15.55
500	17.85
600	18.66
700	20.87
800	21.15
900	22.32
1000	24.22



**9.6 Correction factors for Double –Ridged Waveguide
Horn ANTENNA**

Model: 3115
Serial number:29845
3 meter range; ITL # 1352

FREQUENCY	AFE	FREQUENCY	AFE
(GHz)	(dB/m)	(GHz)	(dB/m)
0.75	25	9.5	38
1.0	23.5	10.0	38.5
1.5	26.0	10.5	38.5
2.0	29.0	11.0	38.5
2.5	27.5	11.5	38.5
3.0	30.0	12.0	38.0
3.5	31.5	12.5	38.5
4.0	32.5	13.0	40.0
4.5	32.5	13.5	41.0
5.0	33.0	14.0	40.0
5.5	35.0	14.5	39.0
6.0	36.5	15.0	38.0
6.5	36.5	15.5	37.5
7.0	37.5	16.0	37.5
7.5	37.5	16.5	39.0
8.0	37.5	17.0	40.0
8.5	38.0	17.5	42.0
9.0	37.5	18.0	42.5



9.7

Correction factors for

Horn Antenna

Model: SWH-28

at 3 meter range.

ITL #:1353

CALIBRATION DATA

3 m distance

Frequency, MHz	Measured antenna factor, dB/m ¹⁾
18000	32.4
18500	32.0
19000	32.3
19500	32.4
20000	32.3
20500	32.8
21000	32.8
21500	32.7
22000	33.1
22500	33.0
23000	33.1
23500	33.8
24000	33.5
24500	33.5
25000	33.8
25500	33.9
26000	34.2
26500	34.7

¹⁾ The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.