

FCC Test Report

Product Name : Headset
Trade Name : Cardo
Model No. : FREECOM 4X
FCC ID : Q95ER25

Applicant : Cardo Systems LTD
Address : 101 E. Park Blvd., Suite 600 Plano, TX 75074

Date of Receipt : Jul. 14, 2020
Issued Date : Jun. 16, 2021
Report No. : 2070523R-E3032110116
Report Version : V1.0



The test results relate only to the samples tested.
The test report shall not be reproduced except in full without the written approval of DEKRA Testing and Certification Co., Ltd.

Test Report Certification


Issued Date : Jun. 16, 2021

Report No. : 2070523R-E3032110116



Product Name : Headset
Applicant : Cardo Systems LTD
Address : 101 E. Park Blvd., Suite 600 Plano, TX 75074
Manufacturer : Cardo Systems LTD
Address : 101 E. Park Blvd., Suite 600 Plano, TX 75074
Trade name : Cardo
Model No. : FREECOM 4X
FCC ID : Q95ER25
EUT Voltage : DC 5V (adapter or host equipment)
DC 3.7 for battery
Testing Voltage : DC 5V
Applicable Standard : FCC CFR Title 47 Part 15 Subpart C Section 15.247: 2019
ANSI C63.10: 2013
Laboratory Name : Hsin Chu Laboratory
Address : No.372-2, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu
County 310, Taiwan, R.O.C.
TEL: +886-3-582-8001 / FAX: +886-3-582-8958
Test Result : Complied

Documented By :



(Lyla Yang / Engineering Adm. Specialist)

Tested By :



(Lion Wang / Senior Engineer)

Approved By :



(Louis Hsu / Deputy Manager)

Revision History

Version	Description	Issued Date
V1.0	Initial issue of report	Jun. 16, 2021

TABLE OF CONTENTS

Description	Page
1. General Information	6
1.1. EUT Description.....	6
1.2. Test Mode.....	8
1.3. Tested System Details.....	9
1.4. Configuration of tested System.....	9
1.5. EUT Exercise Software.....	9
1.6. Comments and Remarks	10
1.7. Test Facility.....	10
1.8. List of Test Equipment.....	12
1.9. Uncertainty.....	13
1.10. Duty Cycle	14
2. AC power Line Conducted Emission	15
2.1. Test Setup	15
2.2. Limits	15
2.3. Test Procedure	15
2.4. Test Specification	15
2.5. Test Result.....	16
3. Maximum peak conducted output power	18
3.1. Test Setup	18
3.2. Limits	18
3.3. Test procedures.....	18
3.4. Test Specification	18
3.5. Test Result.....	19
4. Radiated Emission.....	20
4.1. Test Setup	20
4.2. Limits	21
4.3. Test Procedure	22
4.4. Test Specification	22
4.5. Test Result.....	23
5. RF antenna conducted test.....	37
5.1. Test Setup	37
5.2. Limits	37
5.3. Test Procedure	37
5.4. Test Specification	37
5.5. Test Result.....	38

6.	Band edge	45
6.1.	Test Setup	45
6.2.	Limits	45
6.3.	Test Procedure	45
6.4.	Test Specification	45
6.5.	Test Result.....	46
7.	Number of hopping frequency	62
7.1.	Test Setup	62
7.2.	Limits	62
7.3.	Test Procedures	63
7.4.	Test Specification	63
7.5.	Test Result.....	64
8.	Carrier Frequency Separation	67
8.1.	Test Setup	67
8.2.	Limits	67
8.3.	Test Procedures	67
8.4.	Test Specification	67
8.5.	Test Result.....	68
9.	20dB Bandwidth.....	73
9.1.	Test Setup	73
9.2.	Limits	73
9.3.	Test Procedures	73
9.4.	Test Specification	73
9.5.	Test Result.....	74
10.	Dwell Time	79
10.1.	Test Setup	79
10.2.	Limits	79
10.3.	Test Procedures	80
10.4.	Test Specification	80
10.5.	Test Result.....	81
	Attachment.....	86
	Test Setup Photograph.....	86

1. General Information

1.1. EUT Description

Product Name	Headset
Trade Name	Cardo
Model No.	FREECOM 4X
Frequency Range	2402~2480MHz
Channel Number	79 Channels
Type of Modulation	GFSK, $\pi/4$ -DQPSK, 8-DPSK

Antenna Information	
MFR.	Cardo
Model No.	N/A
Antenna Type	Printed Antenna
Antenna Gain	-2 dBi

Accessories Information	
USB Type-C Cable	1pcs, Shielded, 1m
Microphone	1pcs, Non-Shielded, 0.2m
Headphone	1pcs, Non-Shielded, 0.55m
Charging stand	1pcs, Non-Shielded, 0.2m

Working Frequency of Each Channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	20	2422 MHz	40	2442 MHz	60	2462 MHz
01	2403 MHz	21	2423 MHz	41	2443 MHz	61	2463 MHz
02	2404 MHz	22	2424 MHz	42	2444 MHz	62	2464 MHz
03	2405 MHz	23	2425 MHz	43	2445 MHz	63	2465 MHz
04	2406 MHz	24	2426 MHz	44	2446 MHz	64	2466 MHz
05	2407 MHz	25	2427 MHz	45	2447 MHz	65	2467 MHz
06	2408 MHz	26	2428 MHz	46	2448 MHz	66	2468 MHz
07	2409 MHz	27	2429 MHz	47	2449 MHz	67	2469 MHz
08	2410 MHz	28	2430 MHz	8	2450 MHz	68	2470 MHz
09	2411 MHz	29	2431 MHz	49	2451 MHz	69	2471 MHz
10	2412 MHz	30	2432 MHz	50	2452 MHz	70	2472 MHz
11	2413 MHz	31	2433 MHz	51	2453 MHz	71	2473 MHz
12	2414 MHz	32	2434 MHz	52	2454 MHz	72	2474 MHz
13	2415 MHz	33	2435 MHz	53	2455 MHz	73	2475 MHz
14	2416 MHz	34	2436 MHz	54	2456 MHz	74	2476 MHz
15	2417 MHz	35	2437 MHz	55	2457 MHz	75	2477 MHz
16	2418 MHz	36	2438 MHz	56	2458 MHz	76	2478 MHz
17	2419 MHz	37	2439 MHz	57	2459 MHz	77	2479 MHz
18	2420 MHz	38	2440 MHz	58	2460 MHz	78	2480 MHz
19	2421 MHz	39	2441 MHz	59	2461 MHz		

Note:

1. Regards to the frequency band operation; the lowest , middle and highest frequency of channel were selected to perform the test, and then shown on this report.
2. The EUT description is from the customer declaration.

1.2. Test Mode

DEKRA has verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Test Mode	Mode 1: Transmit
-----------	------------------

Test Items	Modulation	Channel	Result
AC power Line Conducted Emission	GFSK	78	Complies
Maximum peak conducted output power	GFSK / $\pi/4$ -DQPSK / 8-DPSK	00/39/78	Complies
Radiated Emission	GFSK / 8-DPSK	00/39/78	Complies
RF antenna conducted test	GFSK / 8-DPSK	00/39/78	Complies
Band edge	GFSK / 8-DPSK	00/39/78	Complies
Number of hopping Frequency	GFSK	Hopping mode	Complies
Carrier Frequency Separation	GFSK / 8-DPSK	00/39/78	Complies
20dB Bandwidth	GFSK / 8-DPSK	00/39/78	Complies
Dwell Time	GFSK / 8-DPSK	00/39/78	Complies

Note:


1. Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
2. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
3. For below 1 GHz radiated emission and AC power Line Conducted Emission have performed all modes of operation were investigated and the worst-case emissions are reported.

1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	FCC ID	Power Cord
1 Notebook PC	Lenovo	Thinkpad	N/A	DoC	Non-Shielded, 1.8m, one ferrite core bonded.

1.4. Configuration of tested System

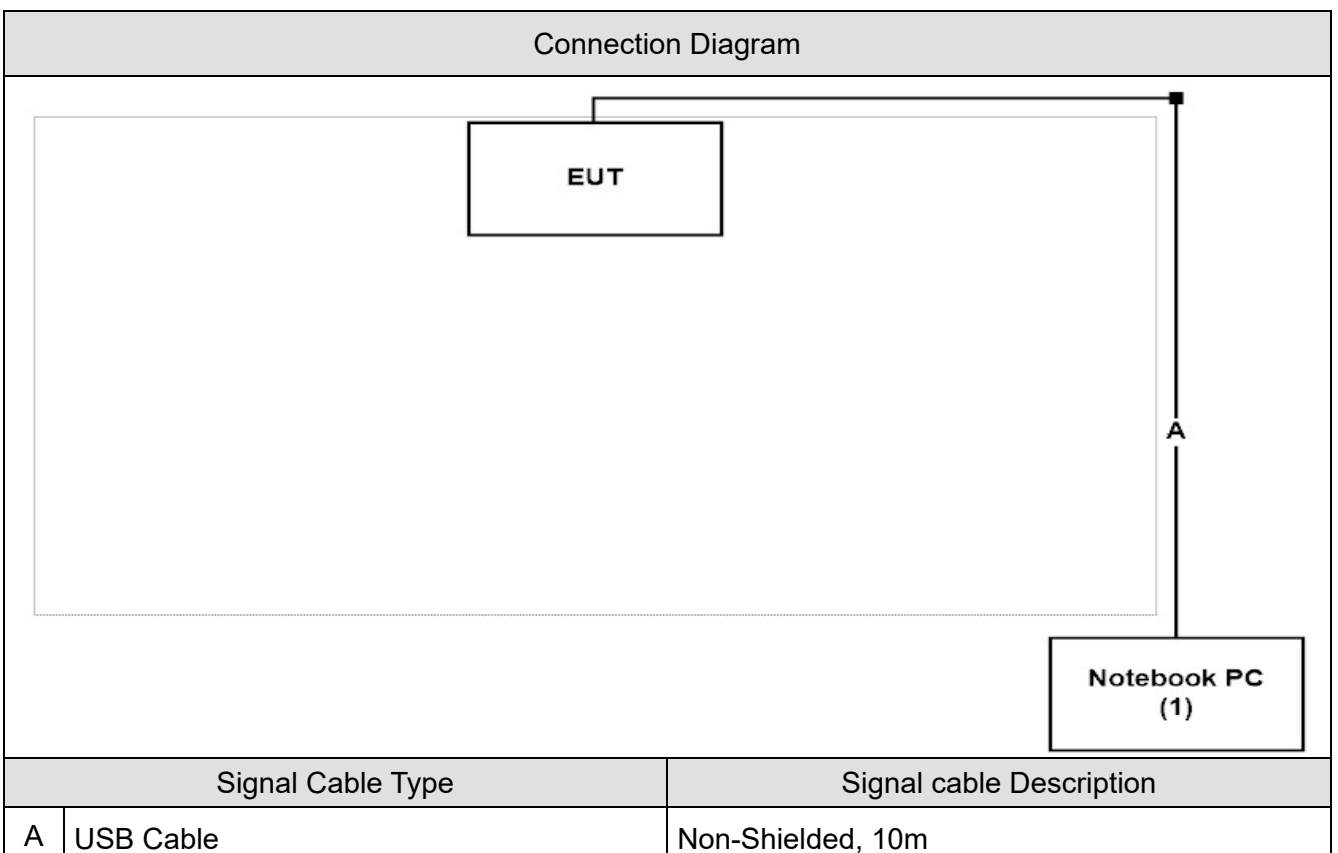

1.5. EUT Exercise Software

1	Set the EUT as shown.
2	Execute control command by software "Bluetest3".
3	Configure test mode, test channel and data rate.
4	Let the EUT start transmitting signal continuously.
5	Verify that device is working properly.

1.6. Comments and Remarks

The product specification and testing instructions for the EUT declared in the report are provided by the manufacturer who will take all responsibilities for the accuracy.

1.7. Test Facility

Ambient conditions in the laboratory:

Items	Test Item	Required	Test Site
Temperature (°C)	FCC PART 15 C 15.207	15 - 35	2
Humidity (%RH)	AC power Line Conducted Emission	25 - 75	
Temperature (°C)	FCC PART 15 C 15.247	15 - 35	1
Humidity (%RH)	Maximum peak conducted output power	25 - 75	
Temperature (°C)	FCC PART 15 C 15.247	15 - 35	1
Humidity (%RH)	Radiated Emission	25 - 75	
Temperature (°C)	FCC PART 15 C 15.247	15 - 35	1
Humidity (%RH)	RF antenna conducted test	25 - 75	
Temperature (°C)	FCC PART 15 C 15.247	15 - 35	1
Humidity (%RH)	Band edge	25 - 75	
Temperature (°C)	FCC PART 15 C 15.247	15 - 35	1
Humidity (%RH)	Number of hopping Frequency	25 - 75	
Temperature (°C)	FCC PART 15 C 15.247	15 - 35	1
Humidity (%RH)	Carrier Frequency Separation	25 - 75	
Temperature (°C)	FCC PART 15 C 15.247	15 - 35	1
Humidity (%RH)	20dB Bandwidth	25 - 75	
Temperature (°C)	FCC PART 15 C 15.247	15 - 35	1
Humidity (%RH)	Dwell Time	25 - 75	

Note: Test site information refers to Laboratory Information.

Laboratory Information

USA : FCC Registration Number: TW3024
Canada : IC Registration Number: 22397-1 / 22397-2 / 22397-3

The address and introduction of DEKRA Testing and Certification Co., Ltd. laboratories can be founded in our Web site: <http://www.dekra.com.tw>

If you have any comments, please don't hesitate to contact us. Our test sites as below:

Test Laboratory	DEKRA Testing and Certification Co., Ltd.
Address	1. No.372, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C. 2. No.372-2, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C.
Phone number	1. +886-3-582-8001 2. +886-3-582-8001
Fax number	1. +886-3-582-8958 2. +886-3-582-8958
Email address	info.tw@dekra.com
Website	http://www.dekra.com.tw

1.8. List of Test Equipment

AC power Line Conducted Emission / SR2-H

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Artificial Mains Network	R&S	ENV4200	848411/010	2020/12/24	2021/12/23
Test Receiver	R&S	ESCS 30	836858/022	2021/02/22	2022/02/21
LISN	R&S	ENV216	100092	2020/06/22	2021/06/21

Radiated / CB2-H

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Signal Analyzer	R&S	FSVA40	101455	2020/10/12	2021/10/11
Signal & Spectrum Analyzer	R&S	FSV40	101049	2021/03/31	2022/03/30
Signal Analyzer	R&S	FSVA40	101435	2020/06/24	2021/06/23
EXA Signal Analyzer	Keysight	N9010A	MY51440132	2021/01/25	2022/01/24
Bilog Antenna	Teseq	CBL6112D	23191	2021/02/26	2022/02/25
Horn Antenna	Schwarzbeck	BBHA 9120D	639	2020/06/04	2021/06/03
Horn Antenna	Schwarzbeck	BBHA 9170	202	2020/12/16	2021/12/15
Pre-Amplifier	EMCI	EMC01820I	980365	2020/06/19	2021/06/18
Pre-Amplifier	EMEC	EM01G18GA	060741	2020/07/24	2021/07/23
Pre-Amplifier	DEKRA	AP-400C	201801231	2020/11/16	2021/11/15
Band Reject Filter	Micro-Tronics	BRM50702	G258	2020/12/16	2021/12/15
Coaxial Cable(13m)	Huber+Suhner	SF104	CB2-H	2020/07/25	2021/07/24
DEKRA Testing System	DEKRA	Version 2.0	CB2-H	NA	NA

Conducted / SR12-H

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
High Speed Peak Power Meter Dual Input	Anritsu	ML2496A	1602004	2020/11/30	2021/11/29
Pulse Power Sensor	Anritsu	MA2411B	1531043	2020/11/30	2021/11/29
Pulse Power Sensor	Anritsu	MA2411B	1531044	2020/11/30	2021/11/29
Power Meter	Keysight	8990B	MY51000248	2020/05/20	2021/05/19
Power Sensor	Keysight	N1923A	MY57240005	2020/05/20	2021/05/19
Signal & Spectrum Analyzer	R&S	FSV40	101049	2020/03/30	2021/03/29
				2021/03/31	2022/03/30

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

1.9. Uncertainty


Test item	Uncertainty
AC power Line Conducted Emission	± 2.26 dB
Maximum peak conducted output power	± 1.27 dB
Radiated Emission	30MHz~1GHz as ± 3.43 dB 1GHz~26.5Ghz as ± 3.65 dB
RF antenna conducted test	± 1.27 dB
Band edge	± 1.27 dB
Number of hopping frequency	± 1.27 dB
Carrier Frequency Separation	± 50 Hz
20dB Bandwidth	± 50 Hz
Dwell Time	± 25 msec

1.10. Duty Cycle

Mode	On Time(ms)	On+Off Time(ms)	Duty Cycle(%)	Duty Cycle Correction Factor (dB)
DH5	2.826	100.000	2.83%	-30.977
3DH5	2.826	100.000	2.83%	-30.977


Note: If the duty cycle correction factor lower than -20dB, the Max. duty cycle correction factor is -20dB.

DH5

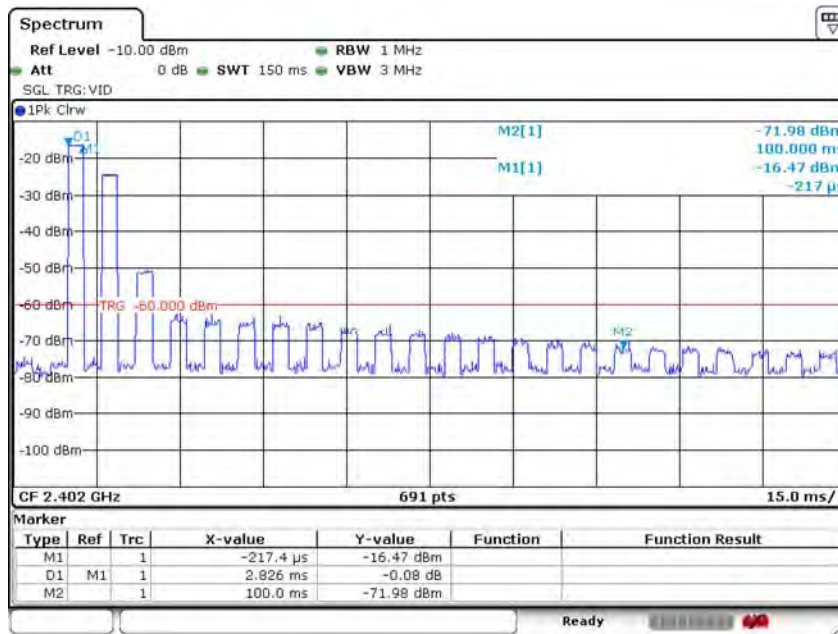

Date: 28.JUL.2020 19:42:06


3DH5

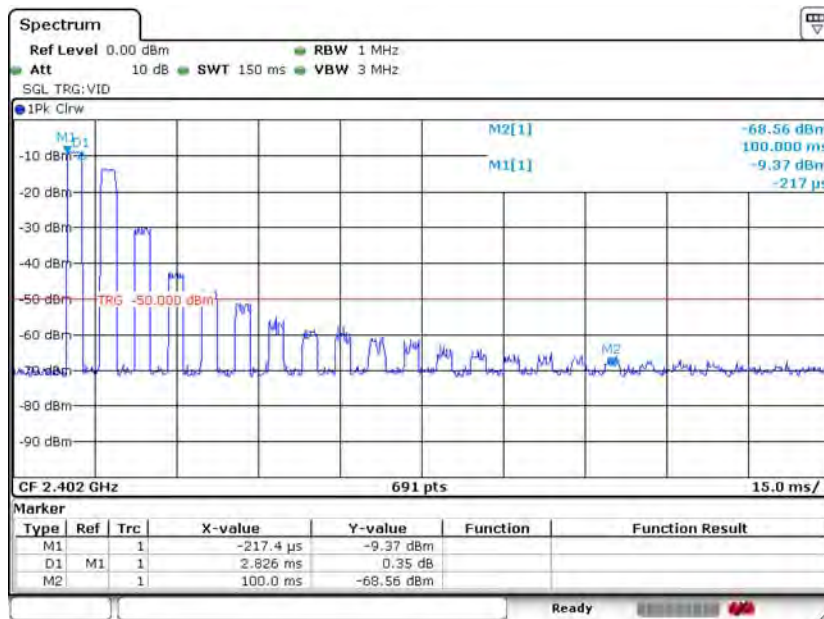

Date: 28.JUL.2020 19:45:12

2. AC power Line Conducted Emission

2.1. Test Setup

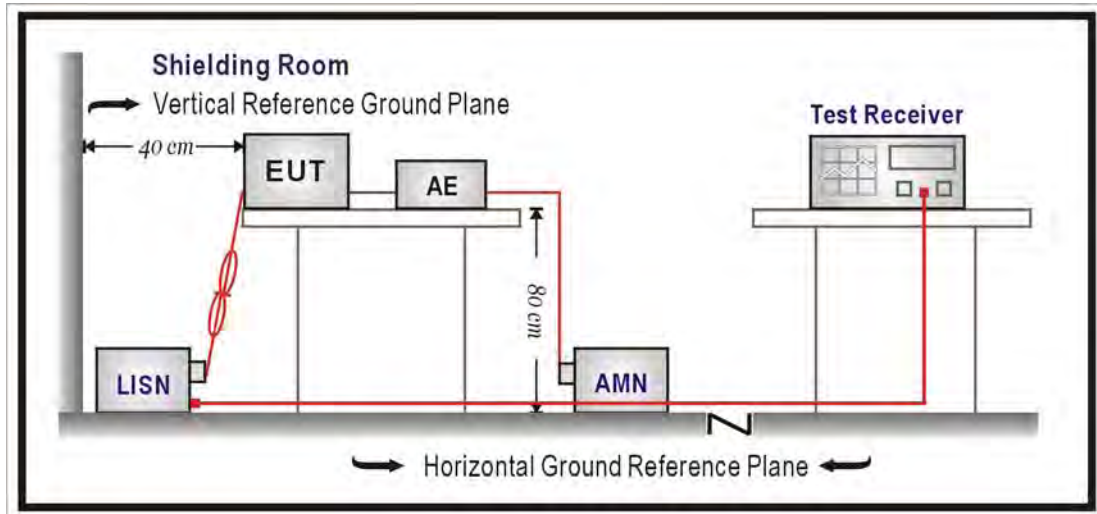

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 Limits (dBuV)		
Frequency	QP	AV
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.3. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

2.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.207: 2019

2.5. Test Result

Model No	FREECOM 4X	Site	SR2-H
Test Voltage	DC 5V	Test Date	2021/4/27
Test Mode	Mode 1: Transmit	Engineer	Scott Lin
Phase	L	Temperature (°C)	22
Test Condition	BT2.0_DH5_2480MHz	Humidity (%RH)	67

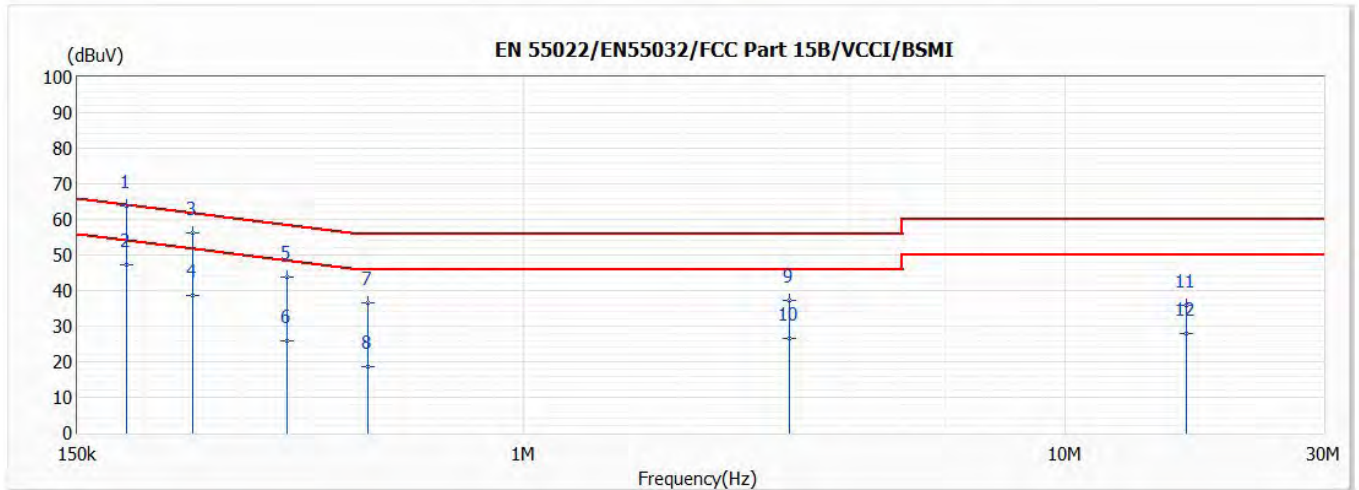


No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
*1	0.185	63.65	64.25	-0.60	54.01	9.64	QP
2	0.185	47.37	54.25	-6.88	37.72	9.64	AV
3	0.245	56.19	61.92	-5.73	46.53	9.65	QP
4	0.245	38.73	51.92	-13.19	29.07	9.65	AV
5	0.366	43.83	58.60	-14.77	34.16	9.67	QP
6	0.366	26.03	48.60	-22.57	16.36	9.67	AV
7	0.516	36.64	56.00	-19.36	26.95	9.69	QP
8	0.516	18.50	46.00	-27.50	8.80	9.69	AV
9	3.092	37.19	56.00	-18.81	27.35	9.84	QP
10	3.092	26.70	46.00	-19.30	16.85	9.84	AV
11	16.695	35.80	60.00	-24.20	25.50	10.30	QP
12	16.695	27.94	50.00	-22.06	17.64	10.30	AV

Remark:

1. "*" means this data is the worst emission level.
2. Emission Level = Reading Level + Correct Factor (Correct Factor = LISN Insertion Loss + Cable Loss).
3. Margin = Emission Level - Limit.

Model No	FREECOM 4X	Site	SR2-H
Test Voltage	DC 5V	Test Date	2021/4/27
Test Mode	Mode 1: Transmit	Engineer	Scott Lin
Phase	N	Temperature (°C)	22
Test Condition	BT2.0_DH5_2480MHz	Humidity (%RH)	67

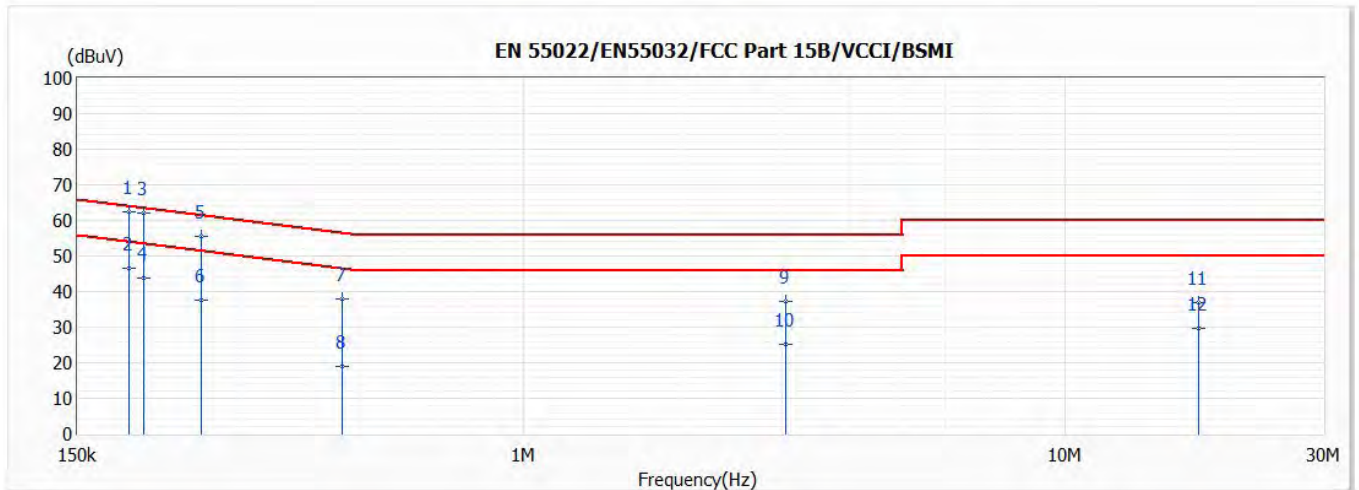


No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	0.187	62.46	64.17	-1.71	52.83	9.63	QP
2	0.187	46.50	54.17	-7.67	36.87	9.63	AV
*3	0.199	62.22	63.66	-1.44	52.58	9.64	QP
4	0.199	43.95	53.66	-9.71	34.31	9.64	AV
5	0.254	55.36	61.64	-6.28	45.71	9.64	QP
6	0.254	37.64	51.64	-13.99	28.00	9.64	AV
7	0.462	37.79	56.65	-18.86	28.11	9.68	QP
8	0.462	19.01	46.65	-27.64	9.33	9.68	AV
9	3.052	37.32	56.00	-18.68	27.49	9.83	QP
10	3.052	25.21	46.00	-20.79	15.38	9.83	AV
11	17.639	36.96	60.00	-23.04	26.52	10.44	QP
12	17.639	29.49	50.00	-20.51	19.05	10.44	AV

Remark:

1. "*" means this data is the worst emission level.
2. Emission Level = Reading Level + Correct Factor (Correct Factor = LISN Insertion Loss + Cable Loss).
3. Margin = Emission Level - Limit.

3. Maximum peak conducted output power

3.1. Test Setup

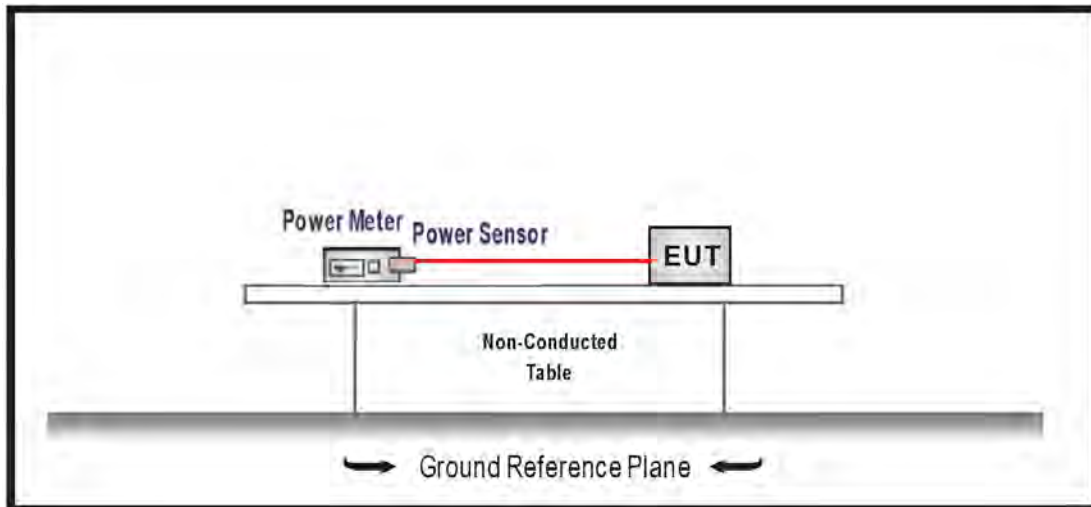

3.2. Limits

For frequency hopping systems operating in the 902-928 MHz band: 1 Watt for systems employing at least 50 hopping channels; and, 0.25 Watts for systems employing less than 50 hopping channels.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

3.3. Test procedures

The EUT was setup according to ANSI C63.10: 2013 and tested according to FHSS test procedure of FCC KDB 558074 D01 v05r02 for compliance to FCC 47CFR 15.247 requirements

3.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.247: 2019.

3.5. Test Result

Product	Headset		
Test Mode	Mode 1: Transmit		
Date of Test	2021/04/16	Test Site	SR12-H
Temperature(°C)	25.5	Humidity (%RH)	62.0

GFSK

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)
00	2402	20.510	≤30
39	2441	20.610	≤30
78	2480	21.240	≤30

$\pi/4$ -DQPSK

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)
00	2402	21.450	≤30
39	2441	21.660	≤30
78	2480	15.770	≤30


8-DPSK

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)
00	2402	21.600	≤30
39	2441	21.770	≤30
78	2480	16.330	≤30


4. Radiated Emission

4.1. Test Setup


Under 30MHz Test Setup:

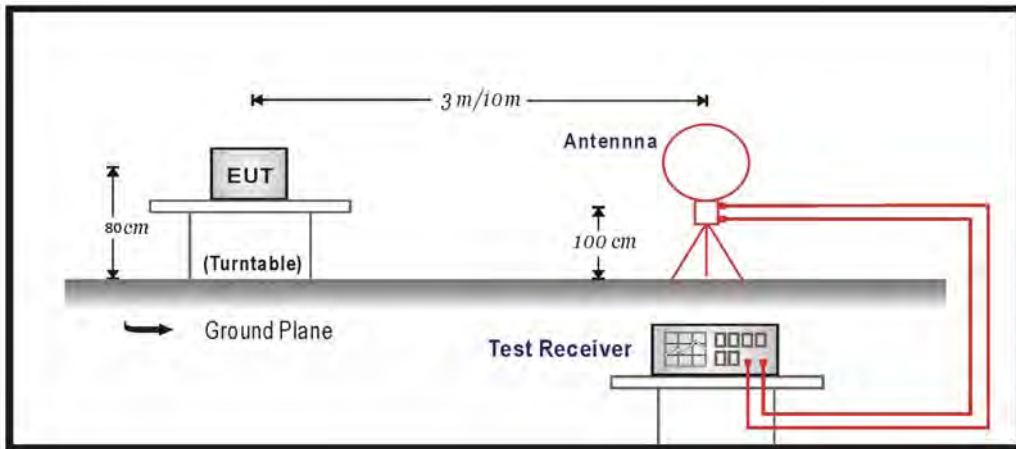

Under 1GHz Test Setup:

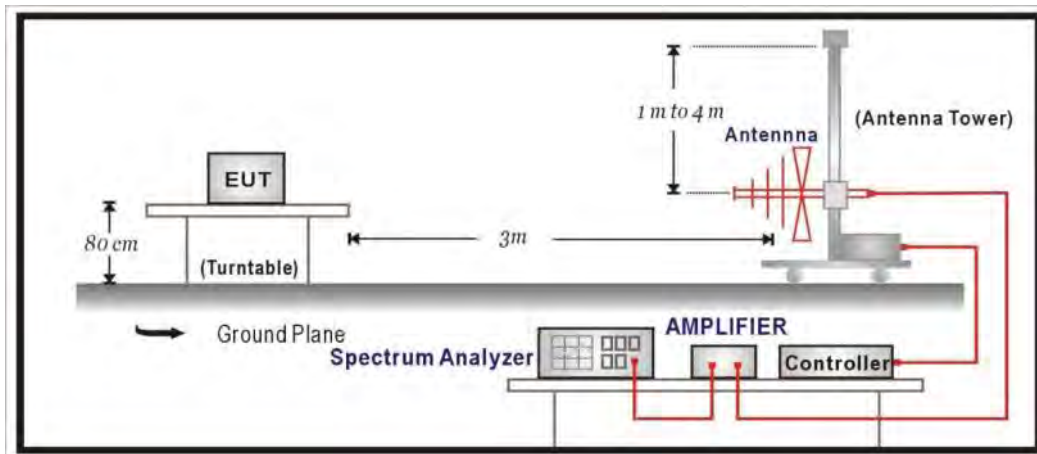

Above 1GHz Test Setup:

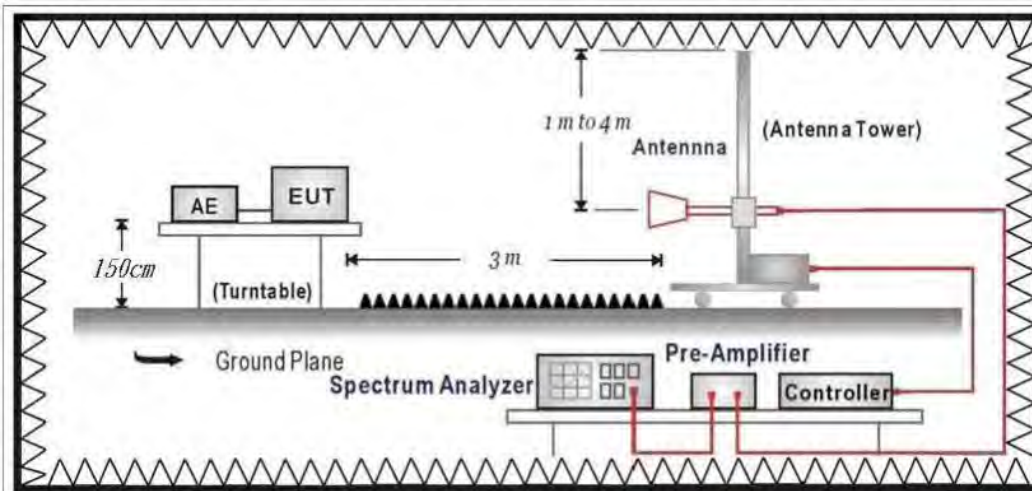

4.2. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency (MHz)	uV/m	dBuV/m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Remarks: 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to FHSS test procedure of FCC KDB 558074 D01 v05r02 for compliance to FCC 47CFR 15.247 requirements.

The EUT and its simulators are placed on a turn table which is 0.8 or 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

On any frequency or frequencies from 9kHz (include The the lowest oscillator frequency generated within the device up to the 10th harmonic) to 1000 MHz, the limits shown are based on measuring equipment employing a quasi-peak detector function and on any frequency or frequencies above 1000 MHz the radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. When average radiated emission measurement are included emission measurement below 1000 MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit. The bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.


4.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.247: 2019

4.5. Test Result

30MHz-1GHz Spurious

Model No	FREECOM 4X	Site	CB2-H
Test Voltage	DC 5V	Test Date	2021/4/14
Test Mode	Mode 1: Transmit	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	BT 2.0,3DH5,Ant0,Ch 78,2.48GHz	Humidity (%RH)	61.0

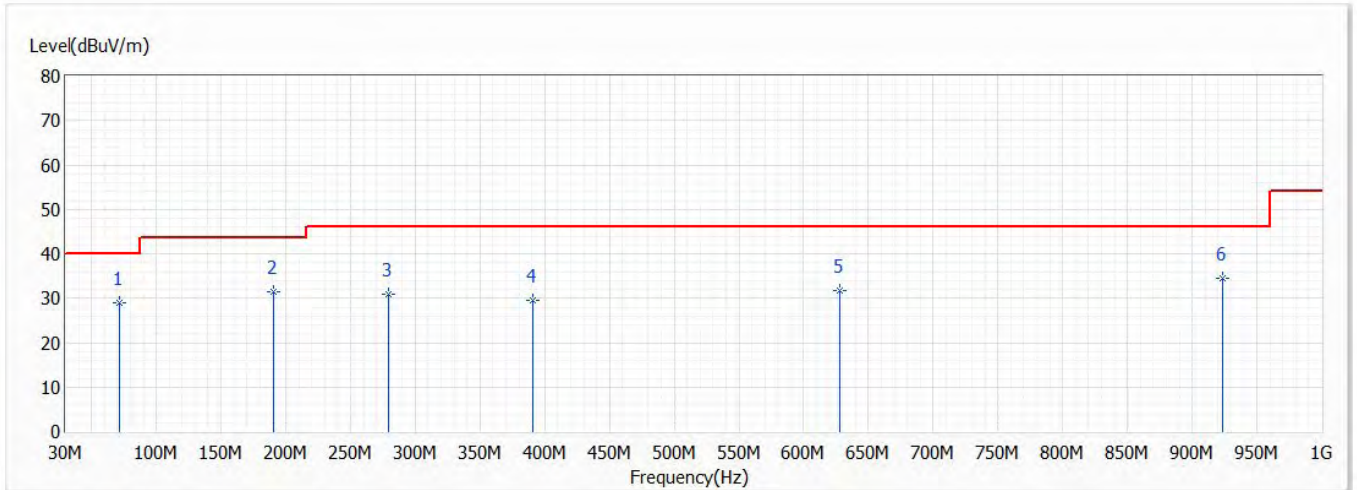


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	71.710	28.85	40.00	-11.15	37.38	-8.53	QP
2	191.020	31.56	43.50	-11.94	36.69	-5.13	QP
3	279.775	30.91	46.00	-15.09	32.46	-1.55	QP
4	390.840	29.49	46.00	-16.51	27.76	1.73	QP
5	627.520	31.82	46.00	-14.18	26.46	5.36	QP
6	923.370	34.42	46.00	-11.58	25.45	8.97	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	FREECOM 4X	Site	CB2-H
Test Voltage	DC 5V	Test Date	2021/4/14
Test Mode	Mode 1: Transmit	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	BT 2.0,3DH5,Ant0,Ch 78,2.48GHz	Humidity (%RH)	61.0

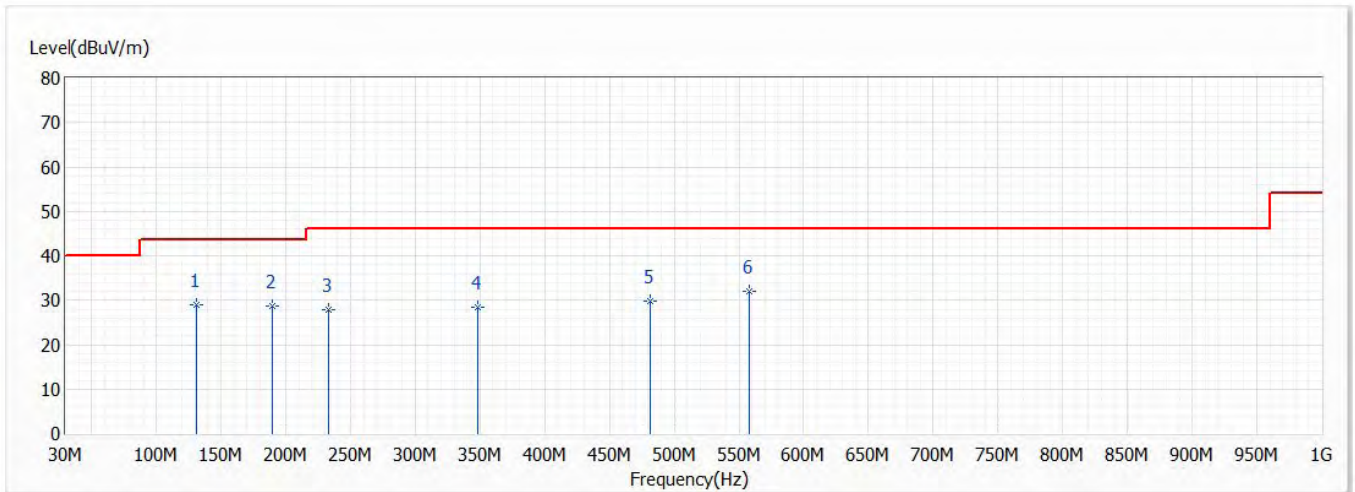


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	130.880	28.99	43.50	-14.51	31.65	-2.66	QP
2	190.050	28.80	43.50	-14.70	33.97	-5.17	QP
3	233.215	27.92	46.00	-18.08	30.90	-2.98	QP
4	348.645	28.34	46.00	-17.66	27.97	0.37	QP
5	481.050	29.88	46.00	-16.12	26.41	3.47	QP
* 6	557.680	31.90	46.00	-14.10	27.38	4.52	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Harmonic & Spurious:

Model No	FREECOM 4X	Site	CB2-H
Test Voltage	DC 5V	Test Date	2021/4/13
Test Mode	Mode 1: Transmit	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	BT 2.0,DH5,Ant0,Ch 0,2.402GHz	Humidity (%RH)	61.0

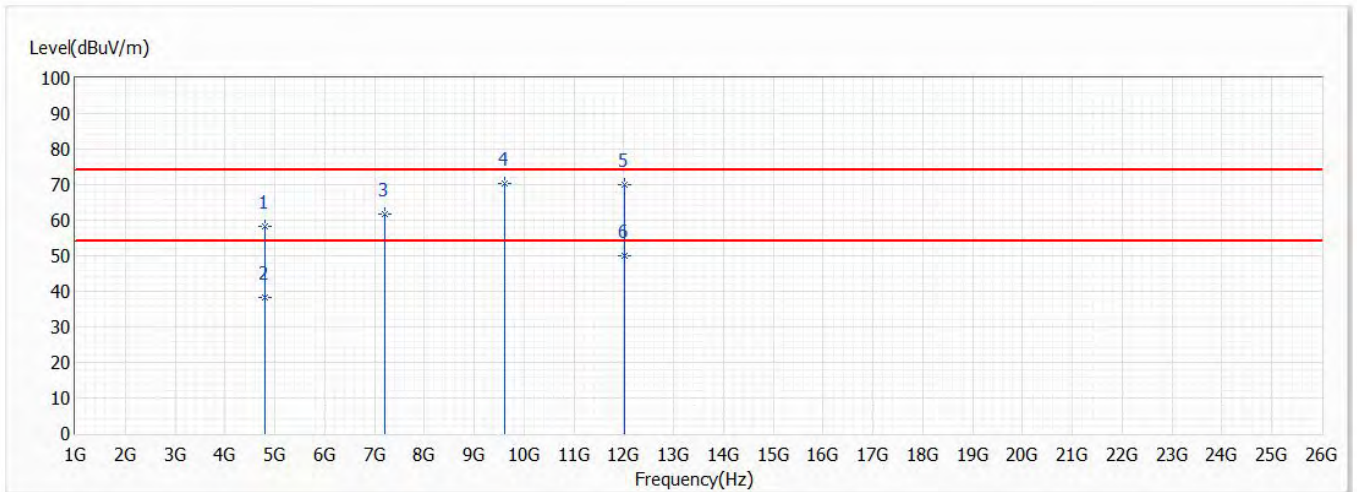


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4804.000	58.41	74.00	-15.59	70.44	-12.03	PK
2	4804.000	38.41	54.00	-15.59	50.44	-12.03	AV
3	7206.000	61.89	74.00	-12.11	66.57	-4.68	PK
* 4	9608.000	70.22	74.00	-3.78	71.55	-1.33	PK
5	12010.000	70.15	74.00	-3.85	67.34	2.81	PK
6	12010.000	50.15	54.00	-3.85	47.34	2.81	AV

Note:

1. “ * ”, means this data is the worst value.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.
4. The calculation of average value :
Average value = Peak value + Duty cycle correction factor (The duty cycle correction factor refer to section "Duty Cycle")
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	FREECOM 4X	Site	CB2-H
Test Voltage	DC 5V	Test Date	2021/4/13
Test Mode	Mode 1: Transmit	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	BT 2.0,DH5,Ant0,Ch 0,2.402GHz	Humidity (%RH)	61.0

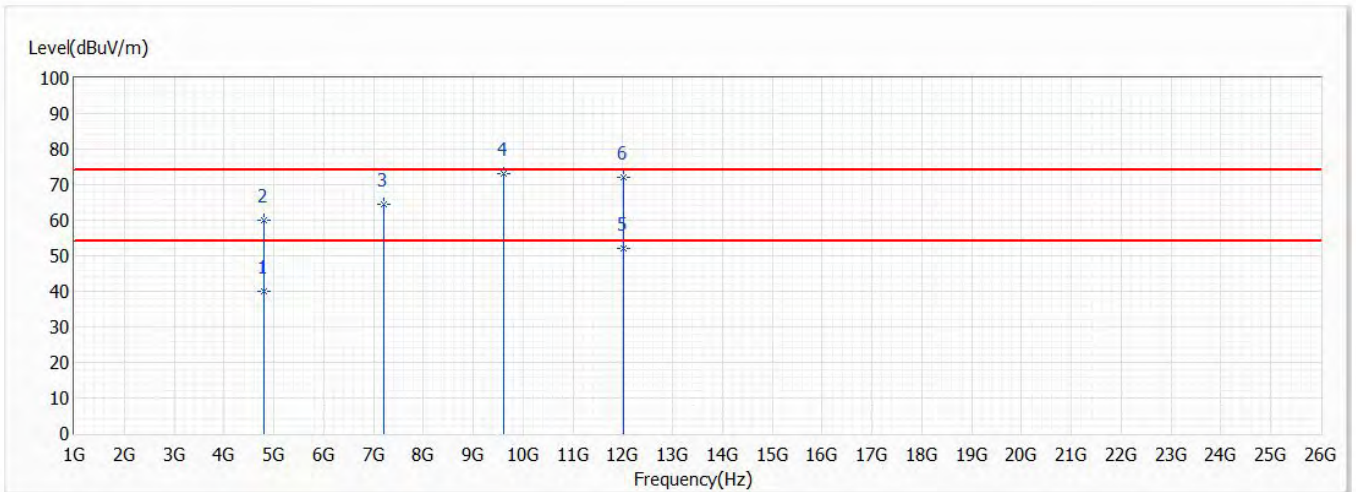


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4804.000	39.93	54.00	-14.07	51.96	-12.03	AV
2	4804.000	59.93	74.00	-14.07	71.96	-12.03	PK
3	7206.000	64.41	74.00	-9.59	69.09	-4.68	PK
* 4	9608.000	72.94	74.00	-1.06	74.27	-1.33	PK
5	12010.000	52.18	54.00	-1.82	49.37	2.81	AV
6	12010.000	72.18	74.00	-1.82	69.37	2.81	PK

Note:

1. “ * ”, means this data is the worst value.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.
4. The calculation of average value :
Average value = Peak value + Duty cycle correction factor (The duty cycle correction factor refer to section "Duty Cycle")
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	FREECOM 4X	Site	CB2-H
Test Voltage	DC 5V	Test Date	2021/4/13
Test Mode	Mode 1: Transmit	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	BT 2.0,DH5,Ant0,Ch 39,2.441GHz	Humidity (%RH)	61.0

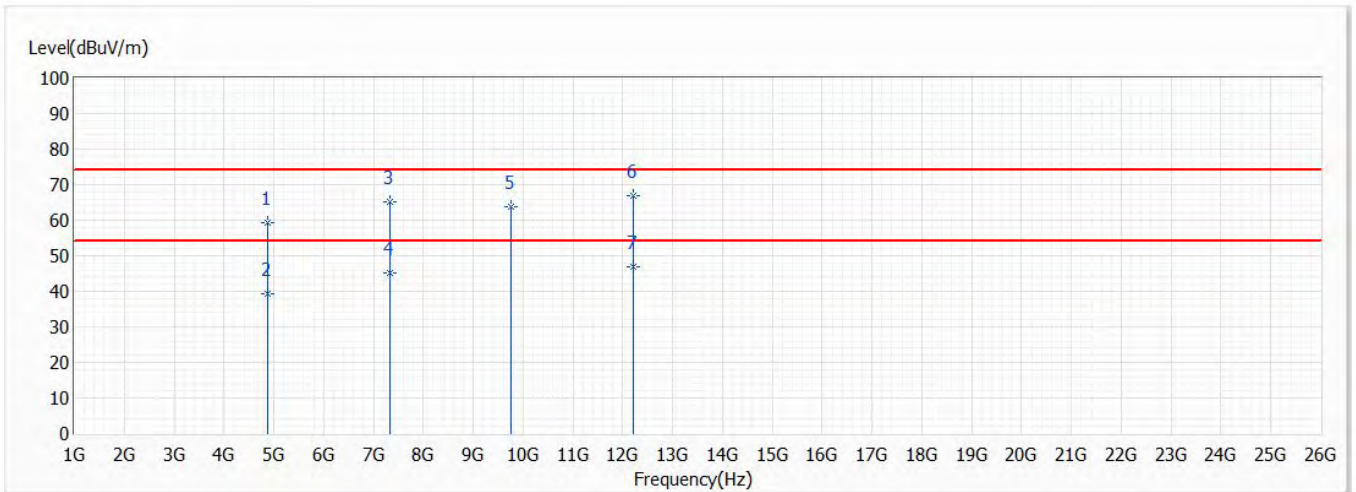


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4882.000	59.18	74.00	-14.82	71.00	-11.82	PK
2	4882.000	39.18	54.00	-14.82	51.00	-11.82	AV
3	7323.000	65.08	74.00	-8.92	69.42	-4.34	PK
4	7323.000	45.08	54.00	-8.92	49.42	-4.34	AV
5	9764.000	63.69	74.00	-10.31	64.96	-1.27	PK
* 6	12205.000	66.76	74.00	-7.24	64.19	2.57	PK
7	12205.000	46.76	54.00	-7.24	44.19	2.57	AV

Note:

1. “ * ”, means this data is the worst value.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.
4. The calculation of average value :
Average value = Peak value + Duty cycle correction factor (The duty cycle correction factor refer to section "Duty Cycle")
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	FREECOM 4X	Site	CB2-H
Test Voltage	DC 5V	Test Date	2021/4/13
Test Mode	Mode 1: Transmit	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	BT 2.0,DH5,Ant0,Ch 39,2.441GHz	Humidity (%RH)	61.0

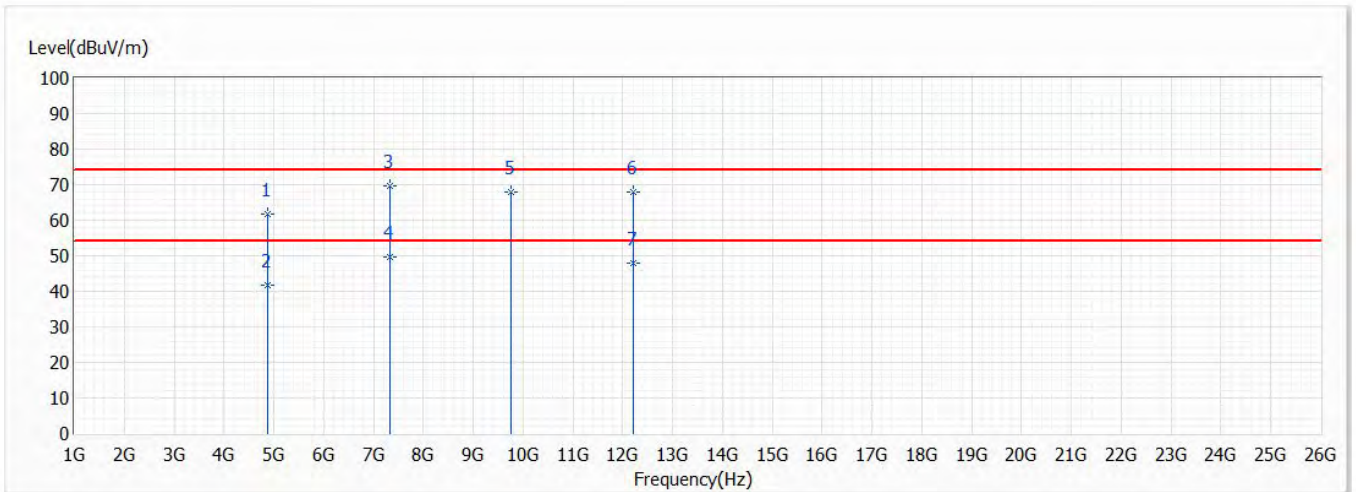


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4882.000	61.82	74.00	-12.18	73.64	-11.82	PK
2	4882.000	41.82	54.00	-12.18	53.64	-11.82	AV
* 3	7323.000	69.51	74.00	-4.49	73.85	-4.34	PK
4	7323.000	49.51	54.00	-4.49	53.85	-4.34	AV
5	9764.000	67.78	74.00	-6.22	69.05	-1.27	PK
6	12205.000	67.83	74.00	-6.17	65.26	2.57	PK
7	12205.000	47.83	54.00	-6.17	45.26	2.57	AV

Note:

1. “ * ”, means this data is the worst value.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.
4. The calculation of average value :
Average value = Peak value + Duty cycle correction factor (The duty cycle correction factor refer to section "Duty Cycle")
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	FREECOM 4X	Site	CB2-H
Test Voltage	DC 5V	Test Date	2021/5/3
Test Mode	Mode 1: Transmit	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	BT 2.0,DH5,Ant0,Ch 78,2.48GHz	Humidity (%RH)	61.0

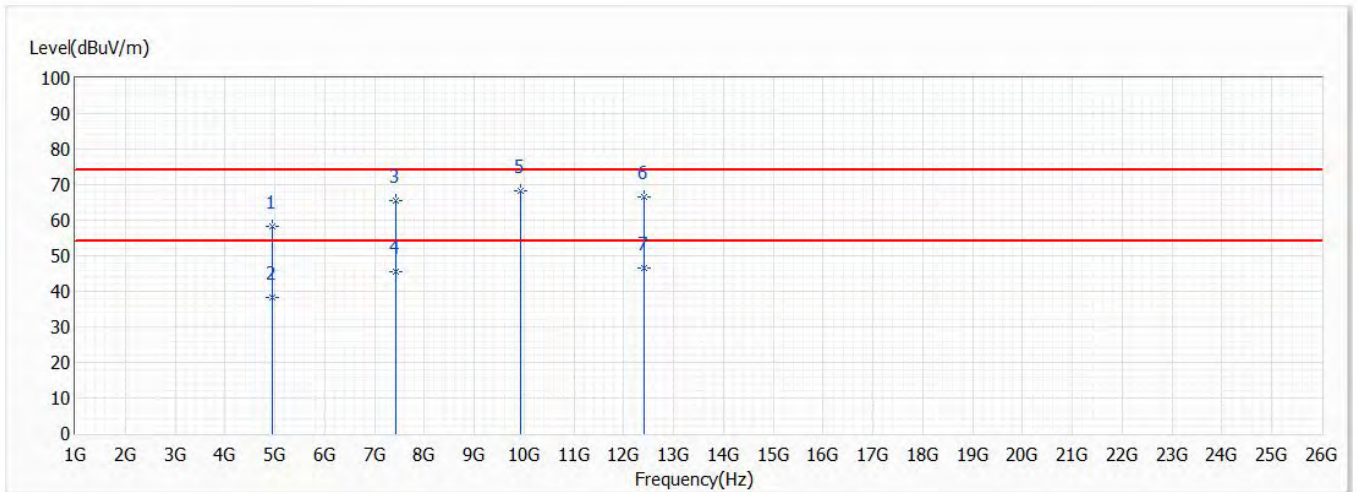


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4960.000	58.24	74.00	-15.76	69.84	-11.60	PK
2	4960.000	38.24	54.00	-15.76	49.84	-11.60	AV
3	7440.000	65.35	74.00	-8.65	69.36	-4.01	PK
4	7440.000	45.35	54.00	-8.65	49.36	-4.01	AV
* 5	9920.000	68.29	74.00	-5.71	69.48	-1.19	PK
6	12400.000	66.53	74.00	-7.47	64.19	2.34	PK
7	12400.000	46.53	54.00	-7.47	44.19	2.34	AV

Note:

1. “ * ”, means this data is the worst value.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.
4. The calculation of average value :
Average value = Peak value + Duty cycle correction factor (The duty cycle correction factor refer to section "Duty Cycle")
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	FREECOM 4X	Site	CB2-H
Test Voltage	DC 5V	Test Date	2021/5/3
Test Mode	Mode 1: Transmit	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	BT 2.0,DH5,Ant0,Ch 78,2.48GHz	Humidity (%RH)	61.0

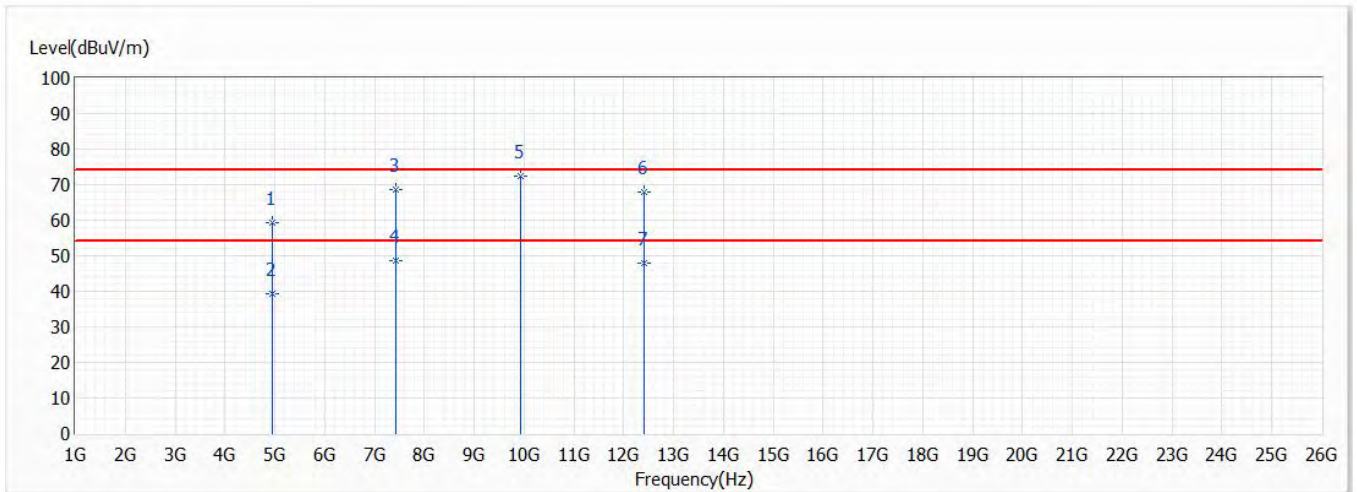


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4960.000	59.36	74.00	-14.64	70.96	-11.60	PK
2	4960.000	39.36	54.00	-14.64	50.96	-11.60	AV
3	7440.000	68.72	74.00	-5.28	72.73	-4.01	PK
4	7440.000	48.72	54.00	-5.28	52.73	-4.01	AV
* 5	9920.000	72.53	74.00	-1.47	73.72	-1.19	PK
6	12400.000	67.84	74.00	-6.16	65.50	2.34	PK
7	12400.000	47.84	54.00	-6.16	45.50	2.34	AV

Note:

1. “ * ”, means this data is the worst value.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.
4. The calculation of average value :
Average value = Peak value + Duty cycle correction factor (The duty cycle correction factor refer to section "Duty Cycle")
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	FREECOM 4X	Site	CB2-H
Test Voltage	DC 5V	Test Date	2021/4/13
Test Mode	Mode 1: Transmit	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	BT 2.0,3DH5,Ant0,Ch 0,2.402GHz	Humidity (%RH)	61.0

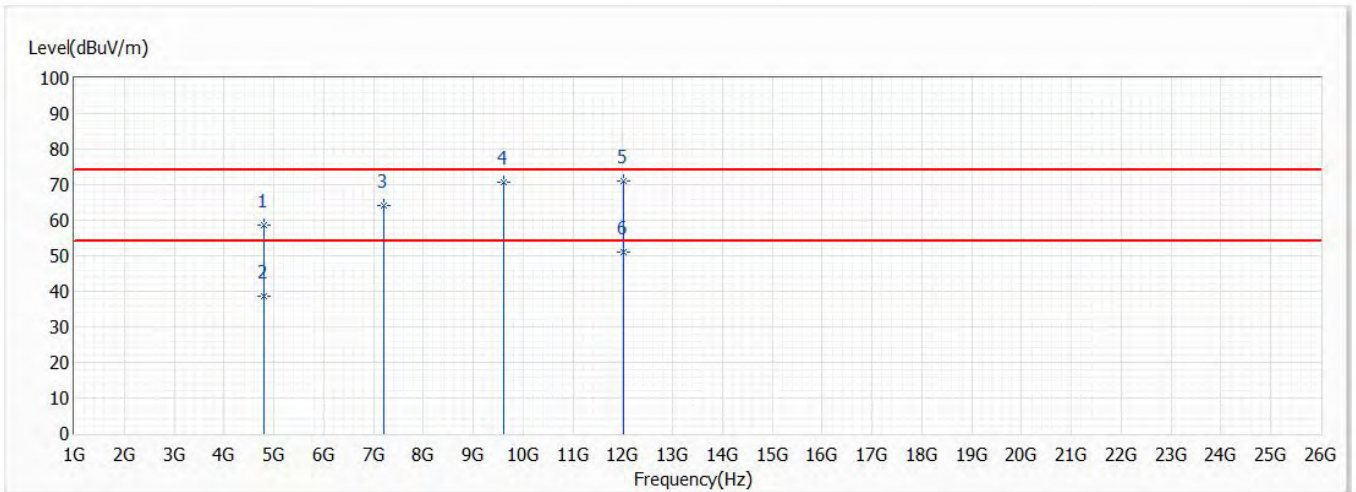


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4804.000	58.71	74.00	-15.29	70.74	-12.03	PK
2	4804.000	38.71	54.00	-15.29	50.74	-12.03	AV
3	7206.000	64.29	74.00	-9.71	68.97	-4.68	PK
4	9608.000	70.75	74.00	-3.25	72.08	-1.33	PK
* 5	12010.000	71.04	74.00	-2.96	68.23	2.81	PK
6	12010.000	51.04	54.00	-2.96	48.23	2.81	AV

Note:

1. “ * ”, means this data is the worst value.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.
4. The calculation of average value :
Average value = Peak value + Duty cycle correction factor (The duty cycle correction factor refer to section "Duty Cycle")
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	FREECOM 4X	Site	CB2-H
Test Voltage	DC 5V	Test Date	2021/4/13
Test Mode	Mode 1: Transmit	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	BT 2.0,3DH5,Ant0,Ch 0,2.402GHz	Humidity (%RH)	61.0

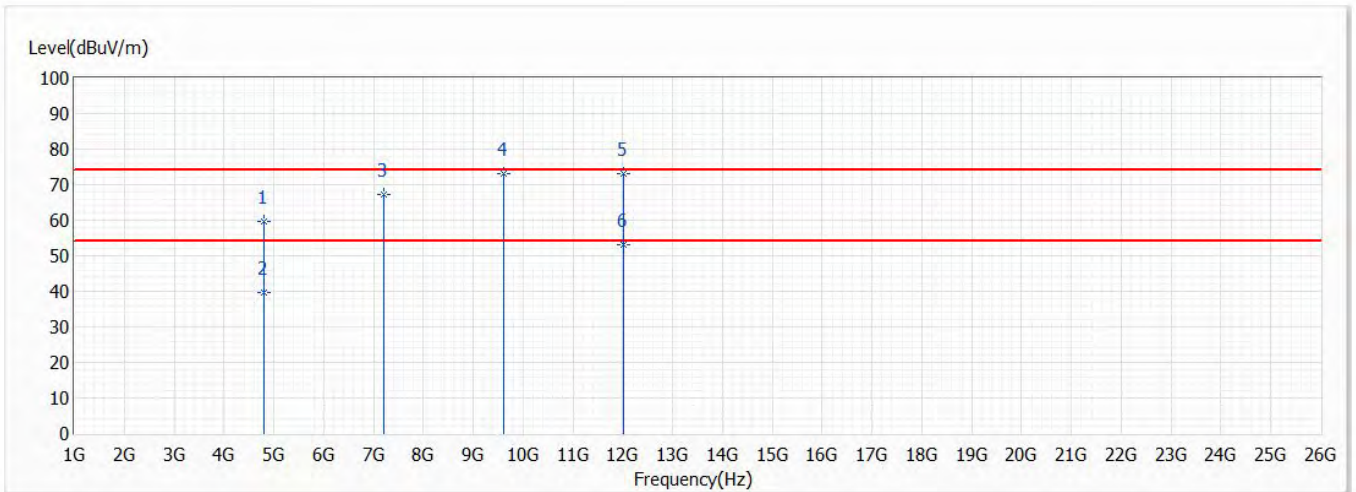


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4804.000	59.62	74.00	-14.38	71.65	-12.03	PK
2	4804.000	39.62	54.00	-14.38	51.65	-12.03	AV
3	7206.000	67.26	74.00	-6.74	71.94	-4.68	PK
4	9608.000	73.01	74.00	-0.99	74.34	-1.33	PK
* 5	12010.000	73.15	74.00	-0.85	70.34	2.81	PK
6	12010.000	53.15	54.00	-0.85	50.34	2.81	AV

Note:

1. “ * ”, means this data is the worst value.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.
4. The calculation of average value :
Average value = Peak value + Duty cycle correction factor (The duty cycle correction factor refer to section "Duty Cycle")
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	FREECOM 4X	Site	CB2-H
Test Voltage	DC 5V	Test Date	2021/4/13
Test Mode	Mode 1: Transmit	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	BT 2.0,3DH5,Ant0,Ch 39,2.441GHz	Humidity (%RH)	61.0

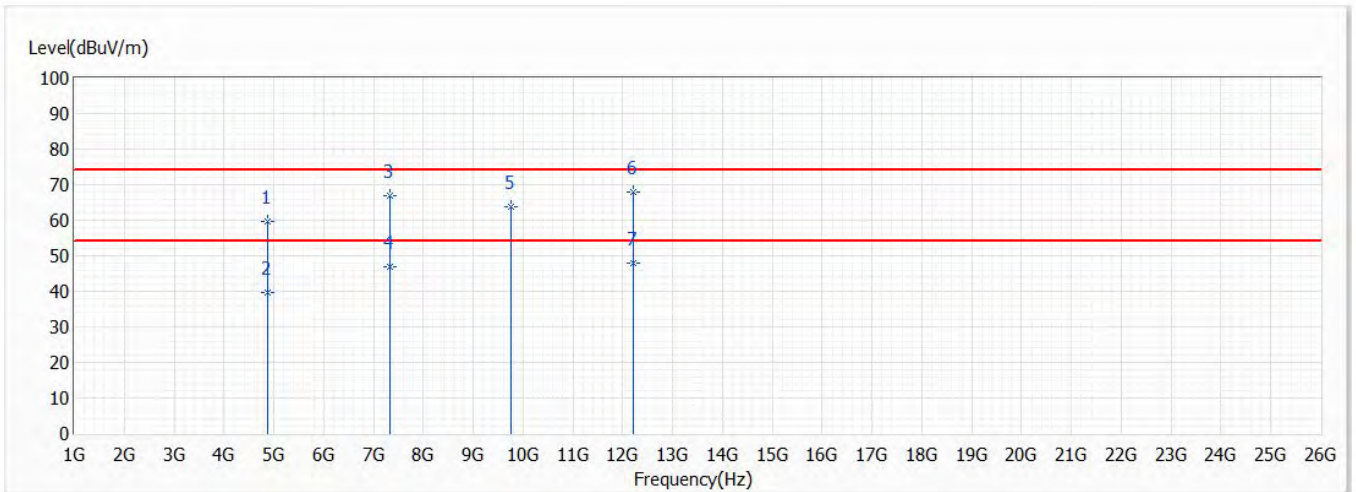


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4882.000	59.81	74.00	-14.19	71.63	-11.82	PK
2	4882.000	39.81	54.00	-14.19	51.63	-11.82	AV
3	7323.000	66.79	74.00	-7.21	71.13	-4.34	PK
4	7323.000	46.79	54.00	-7.21	51.13	-4.34	AV
5	9764.000	63.76	74.00	-10.24	65.03	-1.27	PK
* 6	12205.000	67.82	74.00	-6.18	65.25	2.57	PK
7	12205.000	47.82	54.00	-6.18	45.25	2.57	AV

Note:

1. “ * ”, means this data is the worst value.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.
4. The calculation of average value :
Average value = Peak value + Duty cycle correction factor (The duty cycle correction factor refer to section "Duty Cycle")
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	FREECOM 4X	Site	CB2-H
Test Voltage	DC 5V	Test Date	2021/4/13
Test Mode	Mode 1: Transmit	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	BT 2.0,3DH5,Ant0,Ch 39,2.441G	Humidity (%RH)	61.0

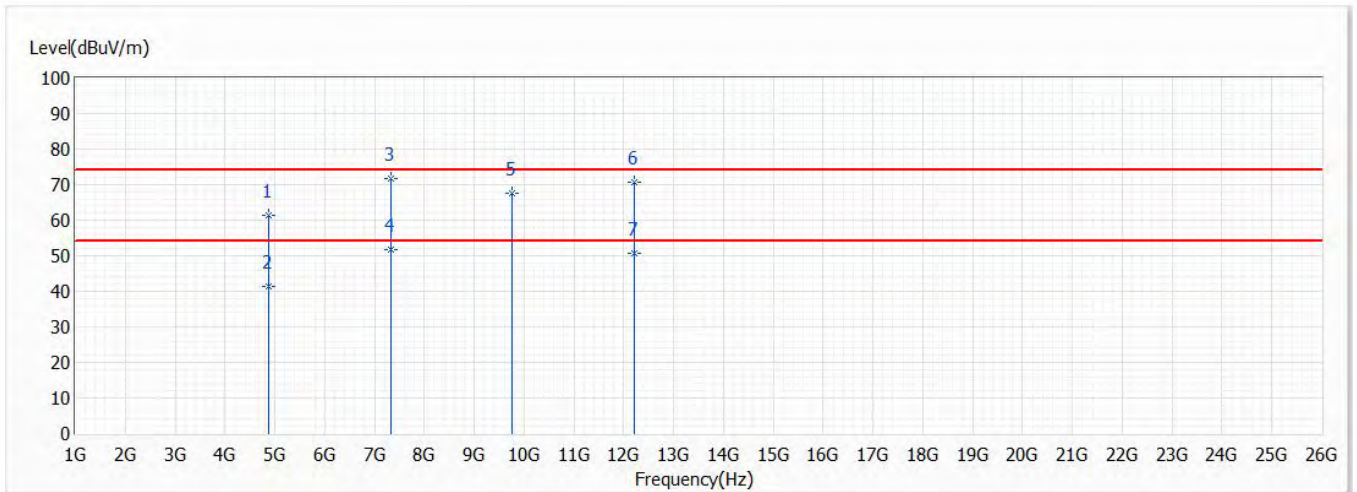


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4882.000	61.31	74.00	-12.69	73.13	-11.82	PK
2	4882.000	41.31	54.00	-12.69	53.13	-11.82	AV
* 3	7323.000	71.87	74.00	-2.13	76.21	-4.34	PK
4	7323.000	51.87	54.00	-2.13	56.21	-4.34	AV
5	9764.000	67.73	74.00	-6.27	69.00	-1.27	PK
6	12205.000	70.63	74.00	-3.37	68.06	2.57	PK
7	12205.000	50.63	54.00	-3.37	48.06	2.57	AV

Note:

1. “ * ”, means this data is the worst value.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.
4. The calculation of average value :
Average value = Peak value + Duty cycle correction factor (The duty cycle correction factor refer to section "Duty Cycle")
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	FREECOM 4X	Site	CB2-H
Test Voltage	DC 5V	Test Date	2021/4/2
Test Mode	Mode 1: Transmit	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	BT 2.0,3DH5,Ant0,Ch 78,2.48GHz	Humidity (%RH)	61.0

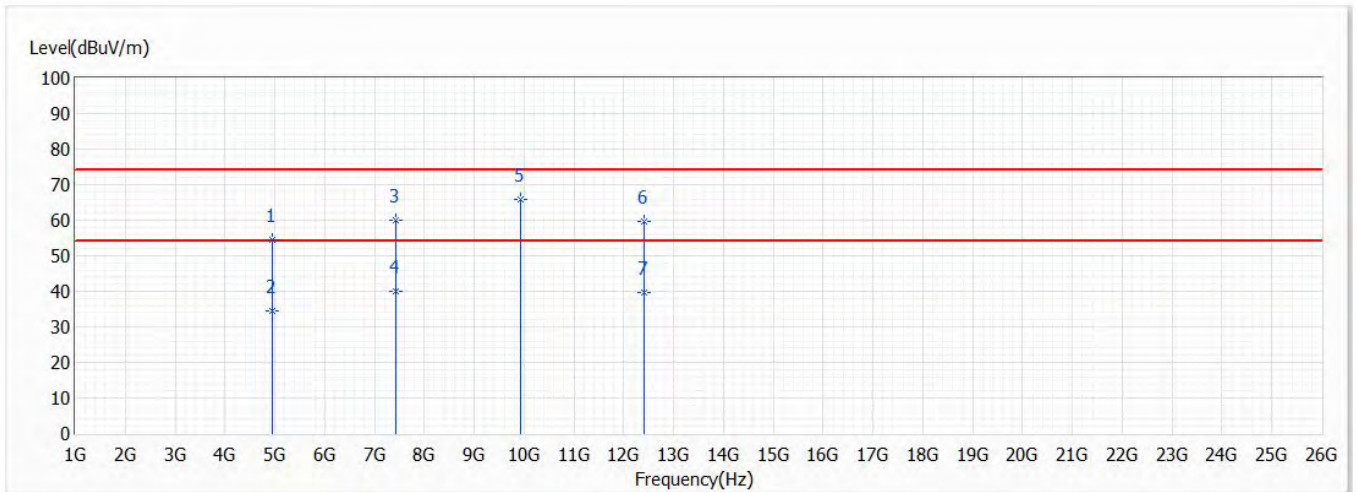


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4960.000	54.56	74.00	-19.44	66.16	-11.60	PK
2	4960.000	34.56	54.00	-19.44	46.16	-11.60	AV
3	7440.000	60.12	74.00	-13.88	64.13	-4.01	PK
4	7440.000	40.12	54.00	-13.88	44.13	-4.01	AV
* 5	9920.000	65.69	74.00	-8.31	66.88	-1.19	PK
6	12400.000	59.58	74.00	-14.42	57.24	2.34	PK
7	12400.000	39.58	54.00	-14.42	37.24	2.34	AV

Note:

1. “ * ”, means this data is the worst value.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.
4. The calculation of average value :
Average value = Peak value + Duty cycle correction factor (The duty cycle correction factor refer to section "Duty Cycle")
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

Model No	FREECOM 4X	Site	CB2-H
Test Voltage	DC 5V	Test Date	2021/4/2
Test Mode	Mode 1: Transmit	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	BT 2.0,3DH5,Ant0,Ch 78,2.48GHz	Humidity (%RH)	61.0

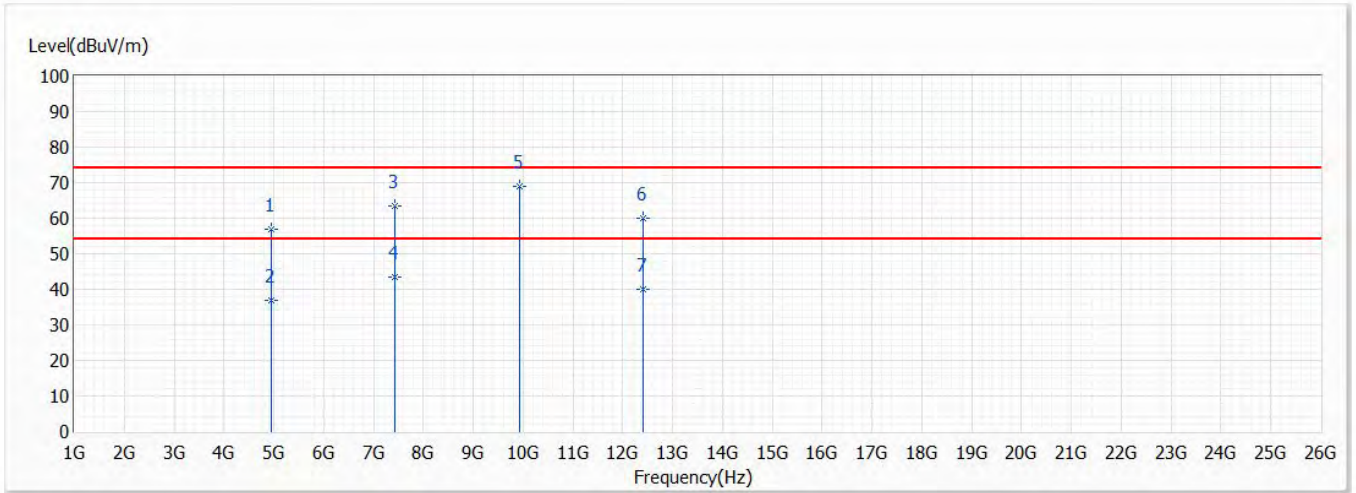


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4960.000	56.96	74.00	-17.04	68.56	-11.60	PK
2	4960.000	36.96	54.00	-17.04	48.56	-11.60	AV
3	7440.000	63.51	74.00	-10.49	67.52	-4.01	PK
4	7440.000	43.51	54.00	-10.49	47.52	-4.01	AV
* 5	9920.000	68.93	74.00	-5.07	70.12	-1.19	PK
6	12400.000	60.13	74.00	-13.87	57.79	2.34	PK
7	12400.000	40.13	54.00	-13.87	37.79	2.34	AV

Note:

1. “ * ”, means this data is the worst value.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.
4. The calculation of average value :
Average value = Peak value + Duty cycle correction factor (The duty cycle correction factor refer to section "Duty Cycle")
5. The emission above 13GHz were not included is because their levels are lower than 20dB form limit.

5. RF antenna conducted test

5.1. Test Setup

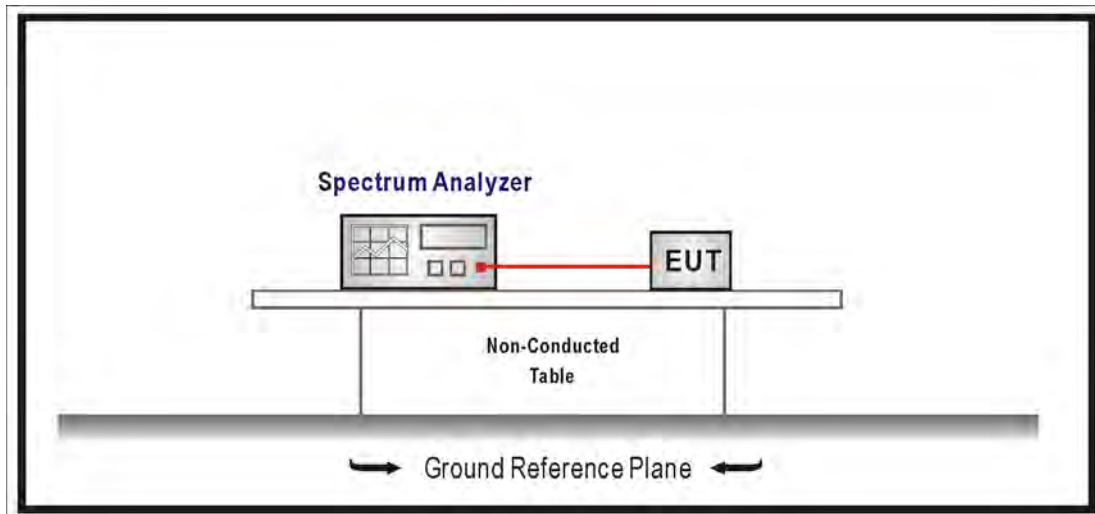

5.2. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on an RF conducted or radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to FHSS test procedure of FCC KDB 558074 D01 v05r02 for compliance to FCC 47CFR 15.247

5.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.247: 2019

5.5. Test Result

Product	Headset		
Test Mode	Mode 1: Transmit		
Date of Test	2021/04/16~2021/05/04	Test Site	SR12-H
Temperature(°C)	22~25	Humidity (%RH)	62~67

GFSK


Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)
00	2402	55.700	≥ 20
39	2441	66.880	≥ 20
78	2480	56.690	≥ 20

8-DPSK

Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)
00	2402	39.690	≥ 20
39	2441	63.690	≥ 20
78	2480	53.910	≥ 20


GFSK

Channel 00

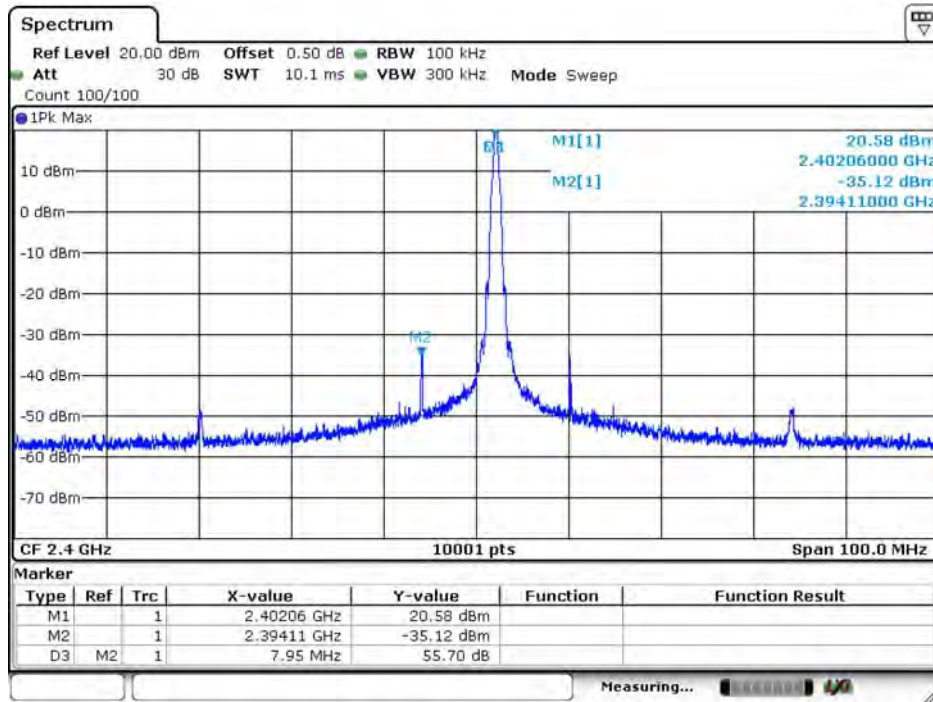


Date: 16.APR.2021 11:07:59

Channel 00 (30MHz-25GHz)

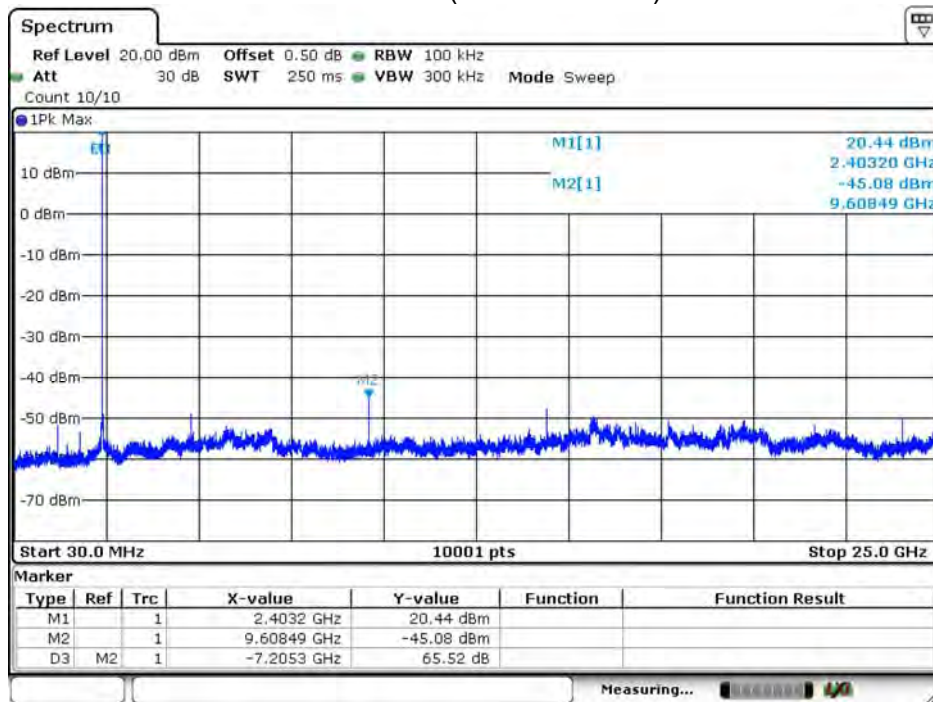


Date: 16.APR.2021 11:08:38

Channel 39

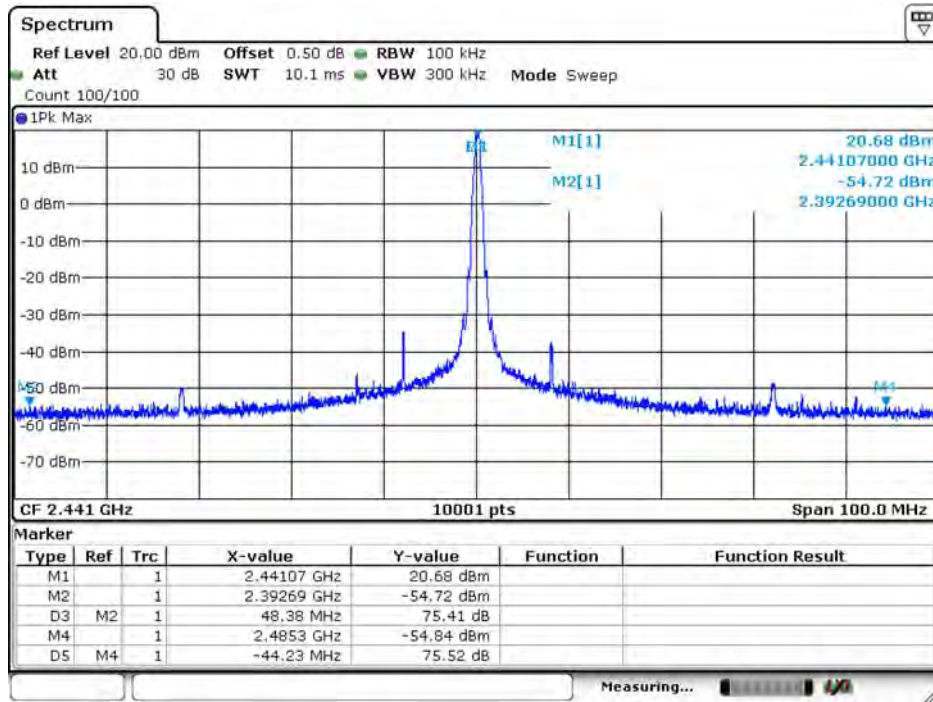


Date: 16 APR 2021 11:06:31

Channel 39 (30MHz-25GHz)

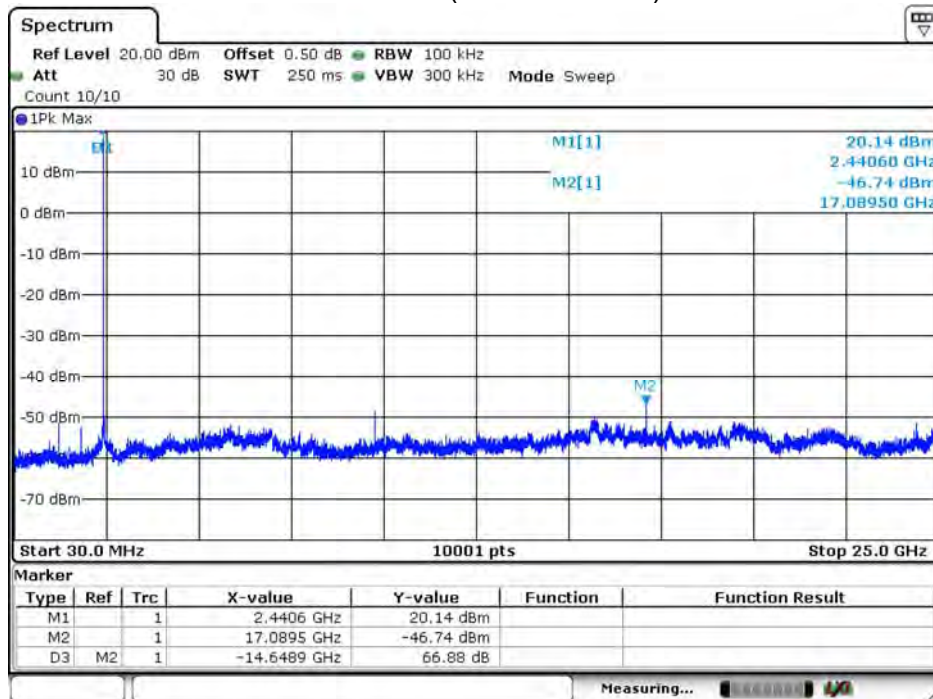


Date: 16 APR 2021 11:07:01

Channel 78

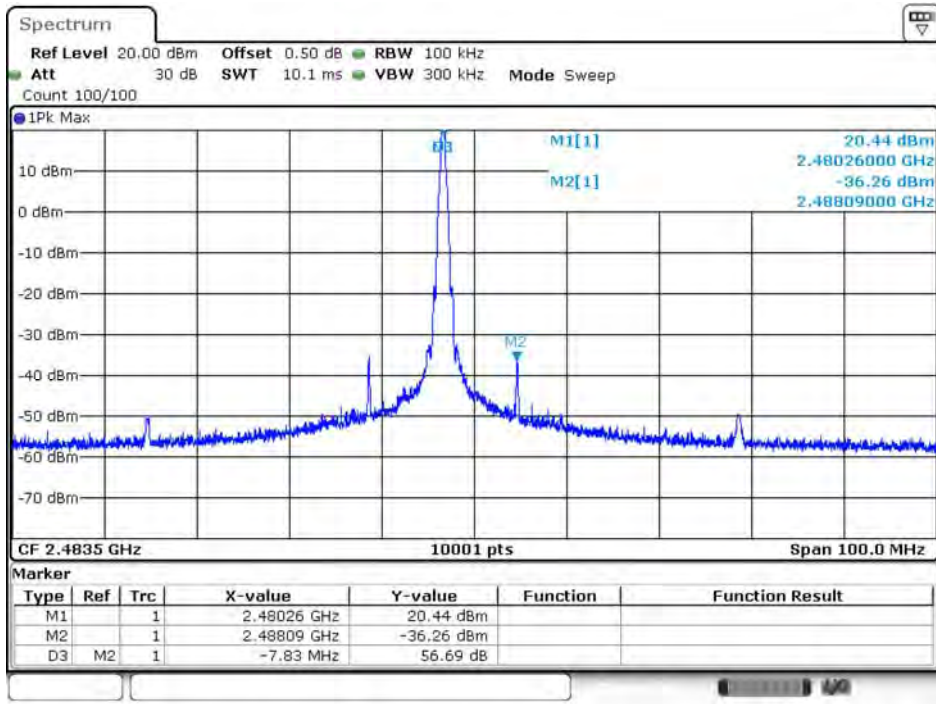

Date: 4.MAY.2021 11:02:26


Channel 78 (30MHz-25GHz)

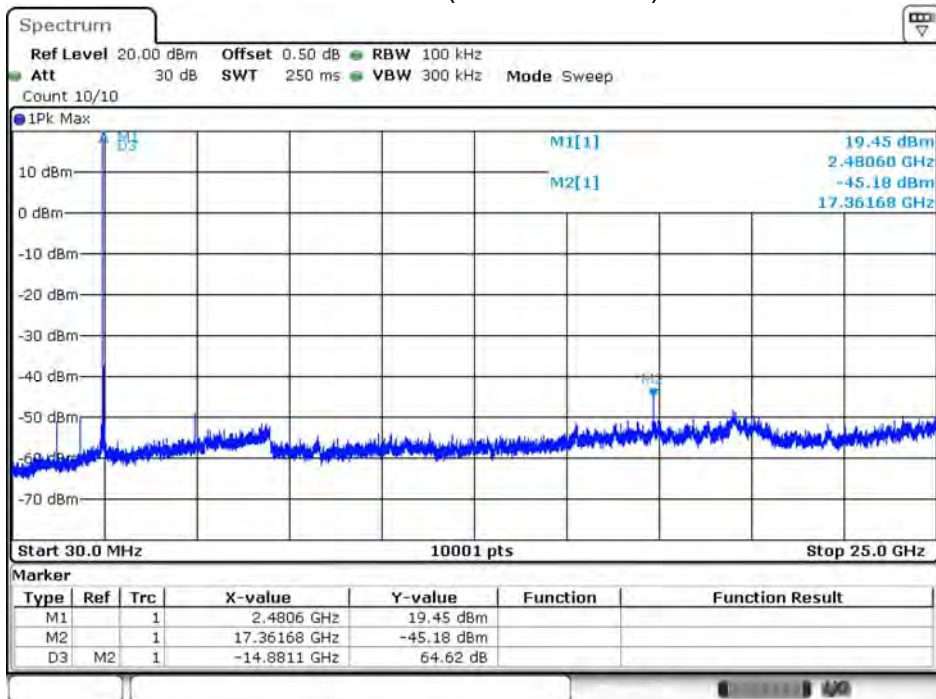

Date: 4.MAY.2021 11:02:58


8-DPSK

Channel 00

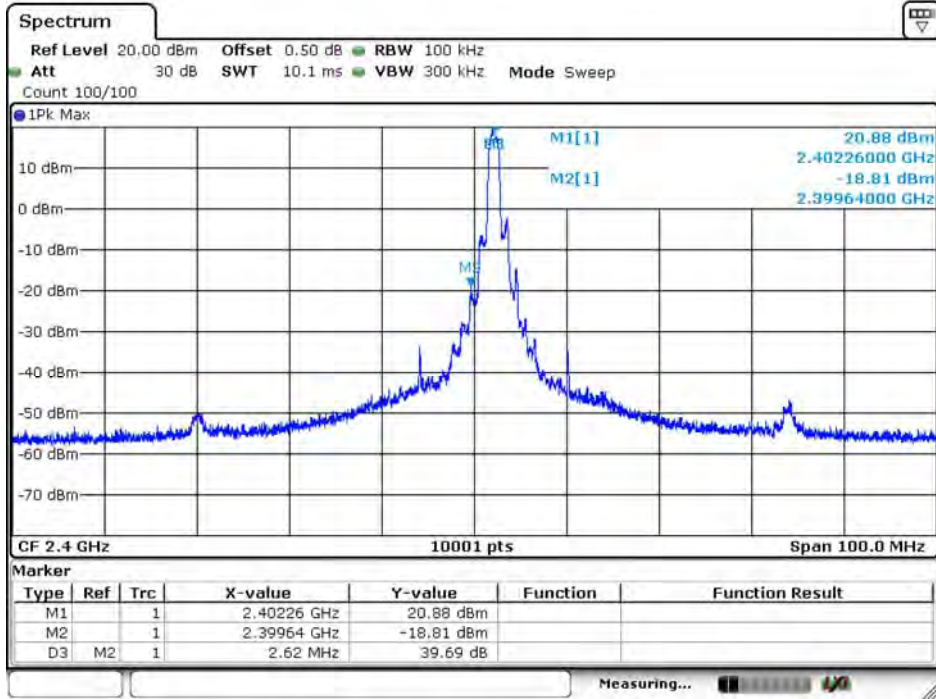


Date: 16 APR 2021 10:32:12

Channel 00 (30MHz-25GHz)

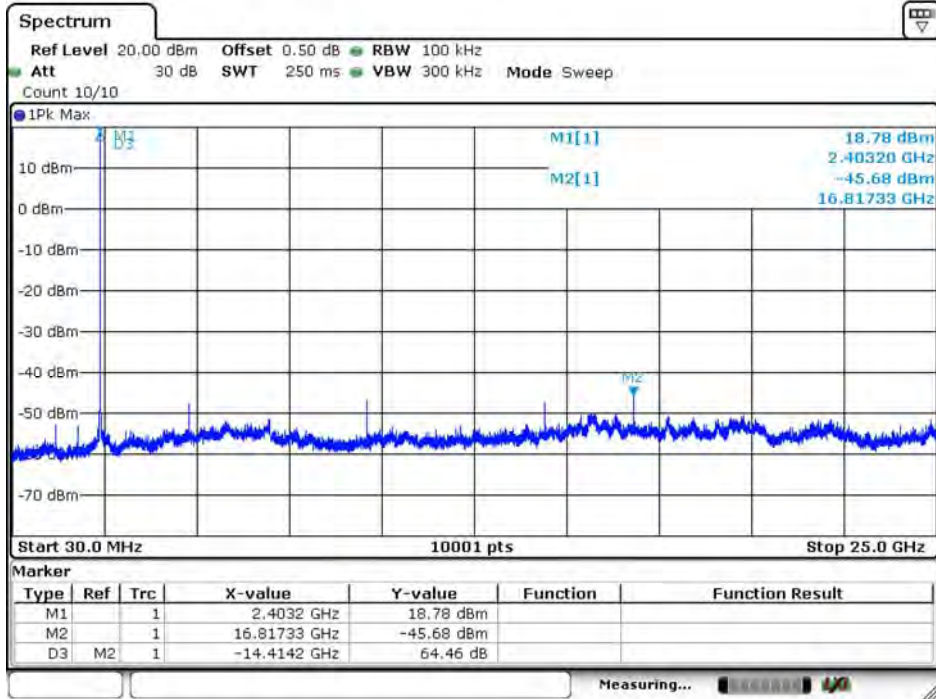


Date: 16 APR 2021 10:33:45

Channel 39

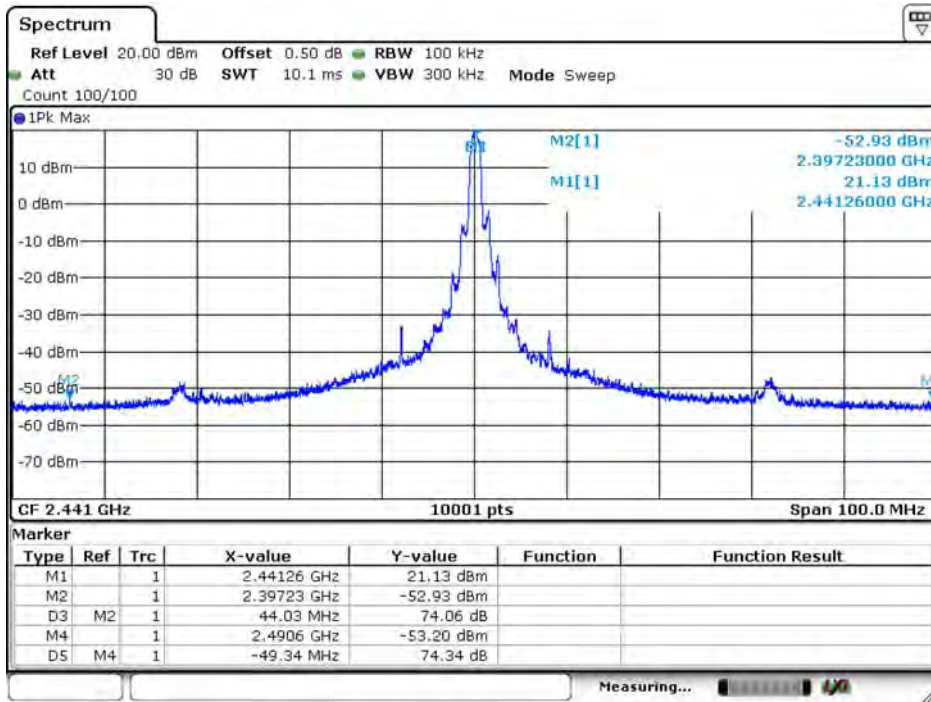


Date: 16 APR 2021 10:38:20

Channel 39 (30MHz-25GHz)

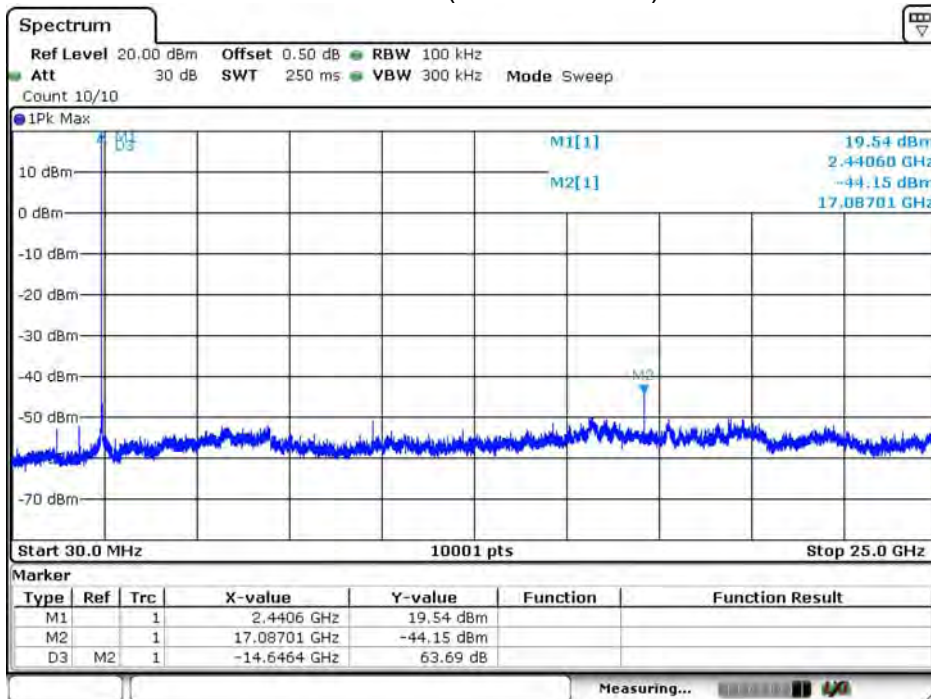


Date: 16 APR 2021 10:34:49

Channel 78

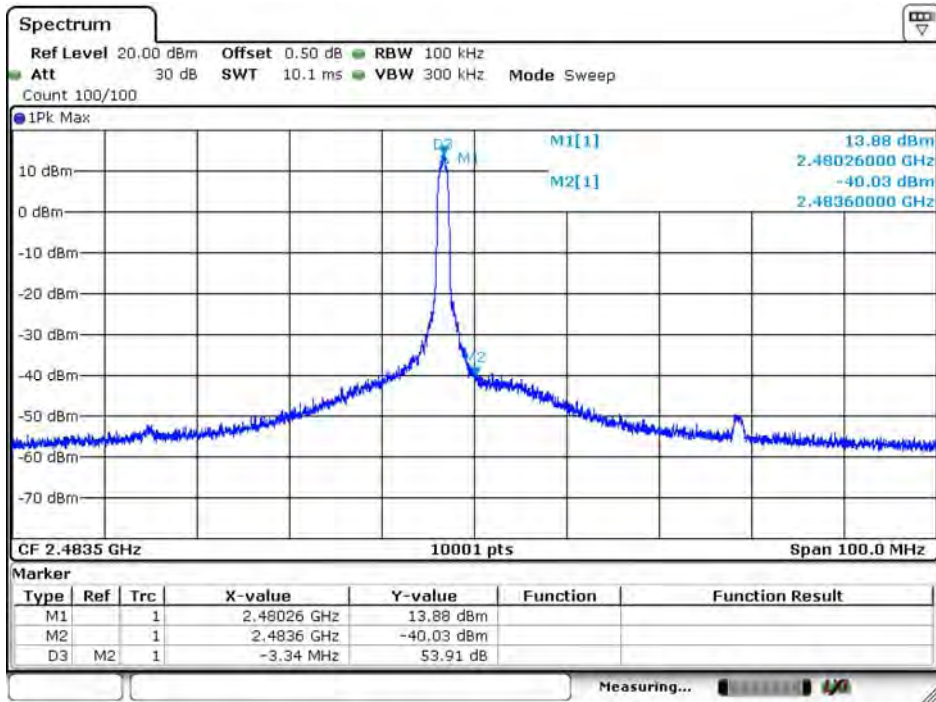

Date: 16 APR 2021 10:43:05


Channel 78 (30MHz-25GHz)

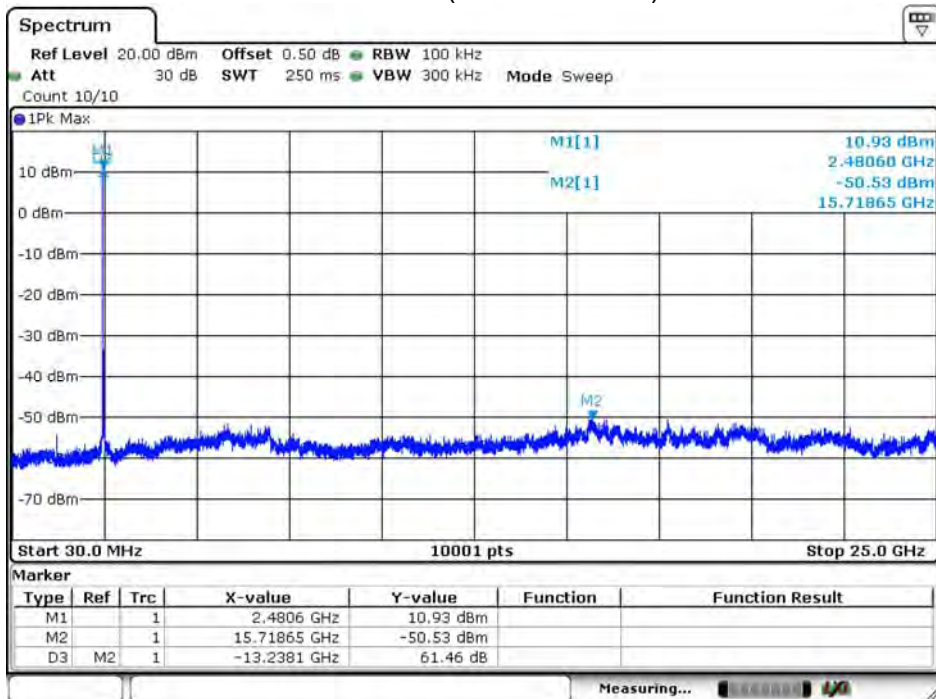

Date: 16 APR 2021 10:43:33

6. Band edge

6.1. Test Setup

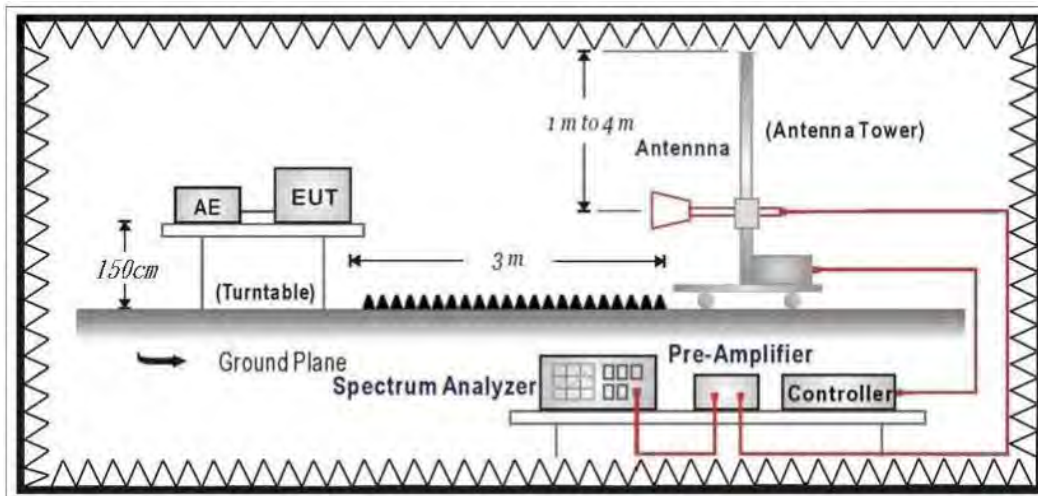

6.2. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

6.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to FHSS test procedure of FCC KDB 558074 D01 v05r02 for compliance to FCC 47CFR 15.247 requirements.

The EUT and its simulators are placed on a turn table which is 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.


Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

6.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.247: 2019

6.5. Test Result

Model No	FREECOM 4X	Site	CB2-H
Test Voltage	DC 5V	Test Date	2021/4/9
Test Mode	Mode 1: Transmit	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	BT 2.0,DH5,Ant0,Ch 0,2.402GHz	Humidity (%RH)	61.0

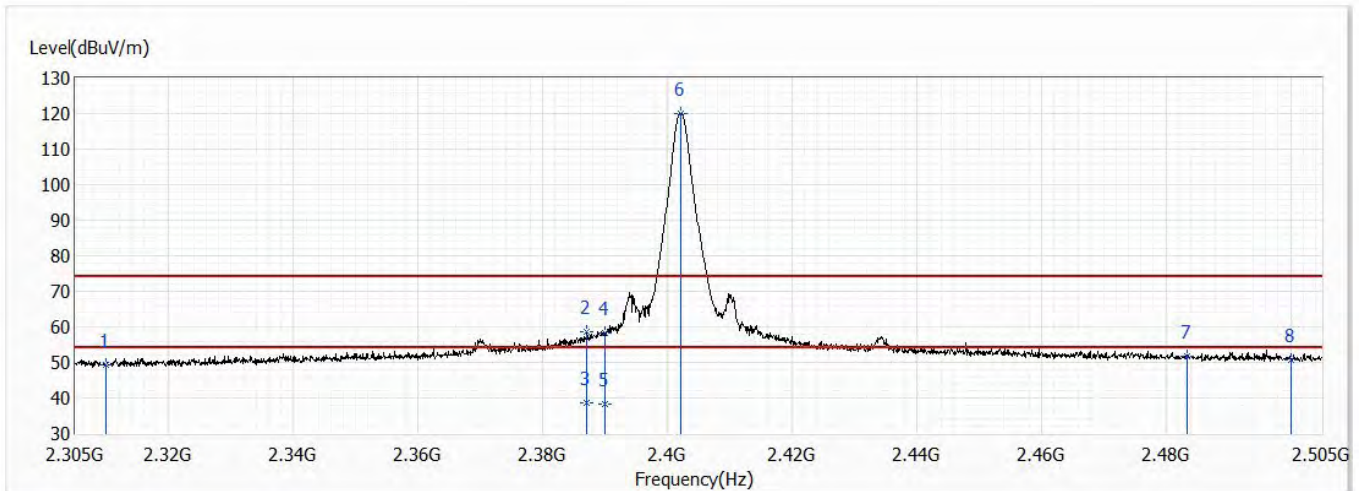


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	49.23	74.00	-24.77	36.08	13.15	PK
2	2387.100	58.45	74.00	-15.55	44.76	13.69	PK
3	2387.100	38.45	54.00	-15.55	24.76	13.69	AV
4	2390.000	58.19	74.00	-15.81	44.49	13.70	PK
5	2390.000	38.19	54.00	-15.81	24.49	13.70	AV
!6	2402.100	119.93	74.00	45.93	106.14	13.79	PK
7	2483.500	51.65	74.00	-22.35	37.29	14.36	PK
8	2500.000	50.73	74.00	-23.27	36.25	14.48	PK

Note:

1. Emission Level = Reading Level + Correct Factor.
2. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
3. The fundamental for reference only, it's not restricted by unwanted emission limit.
4. The calculation of average value :
Average value = Peak value + Duty cycle correction factor (The duty cycle correction factor refer to section "Duty Cycle")

Model No	FREECOM 4X	Site	CB2-H
Test Voltage	DC 5V	Test Date	2021/4/9
Test Mode	Mode 1: Transmit	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	BT 2.0,DH5,Ant0,Ch 0,2.402GHz	Humidity (%RH)	61.0

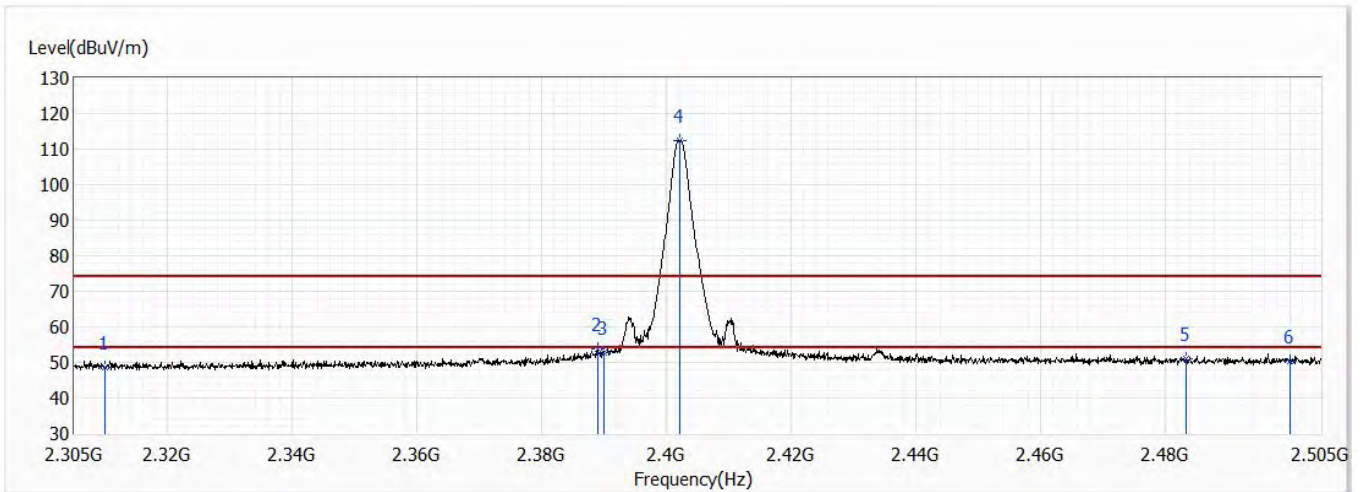


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	48.50	74.00	-25.50	35.35	13.15	PK
2	2389.000	53.95	74.00	-20.05	40.25	13.70	PK
3	2390.000	52.87	74.00	-21.13	39.17	13.70	PK
! 4	2402.100	112.46	74.00	38.46	98.67	13.79	PK
5	2483.500	50.88	74.00	-23.12	36.52	14.36	PK
6	2500.000	50.19	74.00	-23.81	35.71	14.48	PK

Note:

1. Emission Level = Reading Level + Correct Factor.
2. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
3. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	FREECOM 4X	Site	CB2-H
Test Voltage	DC 5V	Test Date	2021/4/9
Test Mode	Mode 1: Transmit	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	BT 2.0,DH5,Ant0,Ch 39,2.441GHz	Humidity (%RH)	61.0

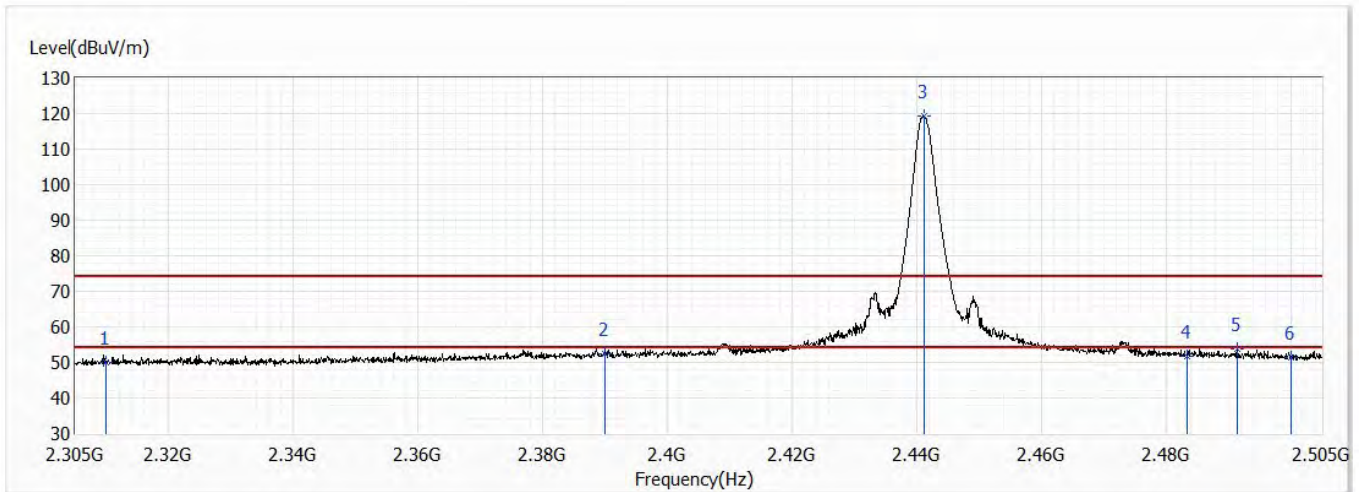


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	50.02	74.00	-23.98	36.87	13.15	PK
2	2390.000	52.32	74.00	-21.68	38.62	13.70	PK
! 3	2441.200	119.17	74.00	45.17	105.11	14.06	PK
4	2483.500	51.82	74.00	-22.18	37.46	14.36	PK
5	2491.500	53.87	74.00	-20.13	39.45	14.42	PK
6	2500.000	51.52	74.00	-22.48	37.04	14.48	PK

Note:

1. Emission Level = Reading Level + Correct Factor.
2. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
3. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	FREECOM 4X	Site	CB2-H
Test Voltage	DC 5V	Test Date	2021/4/9
Test Mode	Mode 1: Transmit	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	BT 2.0,DH5,Ant0,Ch 39,2.441GHz	Humidity (%RH)	61.0

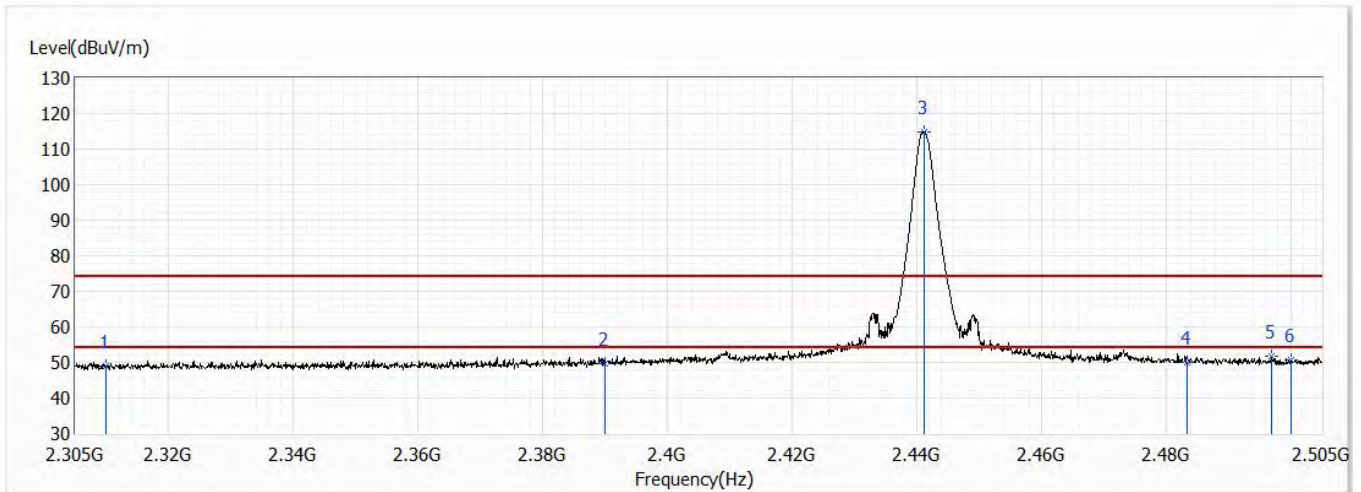


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	49.10	74.00	-24.90	35.95	13.15	PK
2	2390.000	49.70	74.00	-24.30	36.00	13.70	PK
! 3	2441.200	114.94	74.00	40.94	100.88	14.06	PK
4	2483.500	49.94	74.00	-24.06	35.58	14.36	PK
5	2496.900	51.65	74.00	-22.35	37.20	14.45	PK
6	2500.000	50.84	74.00	-23.16	36.36	14.48	PK

Note:

1. Emission Level = Reading Level + Correct Factor.
2. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
3. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	FREECOM 4X	Site	CB2-H
Test Voltage	DC 5V	Test Date	2021/5/3
Test Mode	Mode 1: Transmit	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	BT 2.0,DH5,Ant0,Ch 78,2.48GHz	Humidity (%RH)	61.0

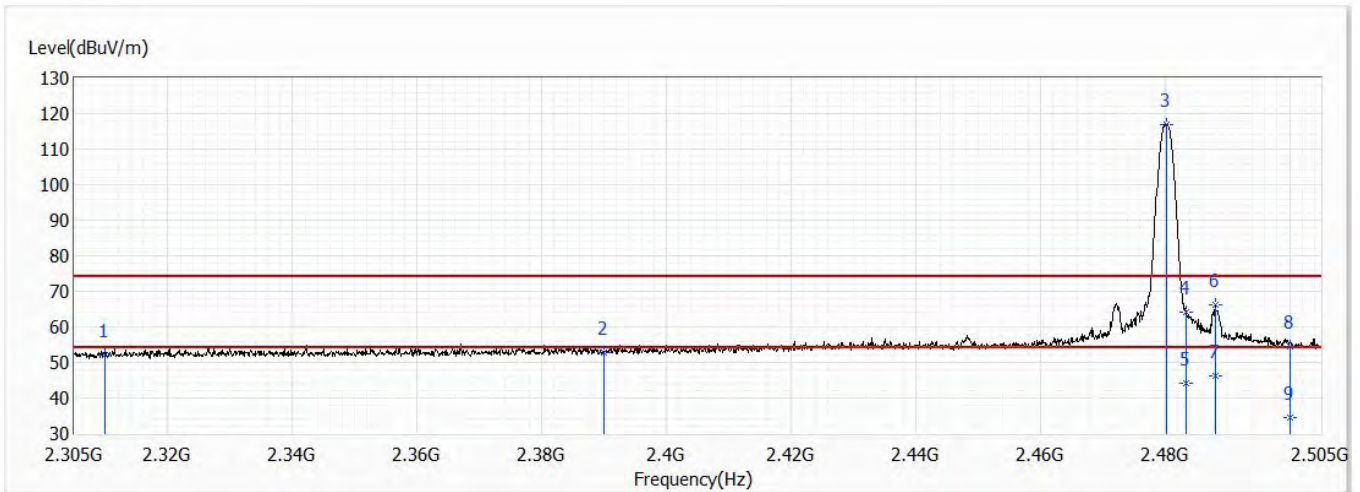


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	52.24	74.00	-21.76	39.09	13.15	PK
2	2390.000	52.91	74.00	-21.09	39.21	13.70	PK
! 3	2480.200	116.91	74.00	42.91	102.57	14.34	PK
4	2483.500	64.25	74.00	-9.75	49.89	14.36	PK
5	2483.500	44.25	54.00	-9.75	29.89	14.36	AV
6	2488.100	66.22	74.00	-7.78	51.82	14.40	PK
7	2488.100	46.22	54.00	-7.78	31.82	14.40	AV
8	2500.000	54.58	74.00	-19.42	40.10	14.48	PK
9	2500.000	34.58	54.00	-19.42	20.10	14.48	AV

Note:

1. Emission Level = Reading Level + Correct Factor.
2. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
3. The fundamental for reference only, it's not restricted by unwanted emission limit.
4. The calculation of average value :
Average value = Peak value + Duty cycle correction factor (The duty cycle correction factor refer to section "Duty Cycle")

Model No	FREECOM 4X	Site	CB2-H
Test Voltage	DC 5V	Test Date	2021/5/3
Test Mode	Mode 1: Transmit	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	BT 2.0,DH5,Ant0,Ch 78,2.48GHz	Humidity (%RH)	61.0

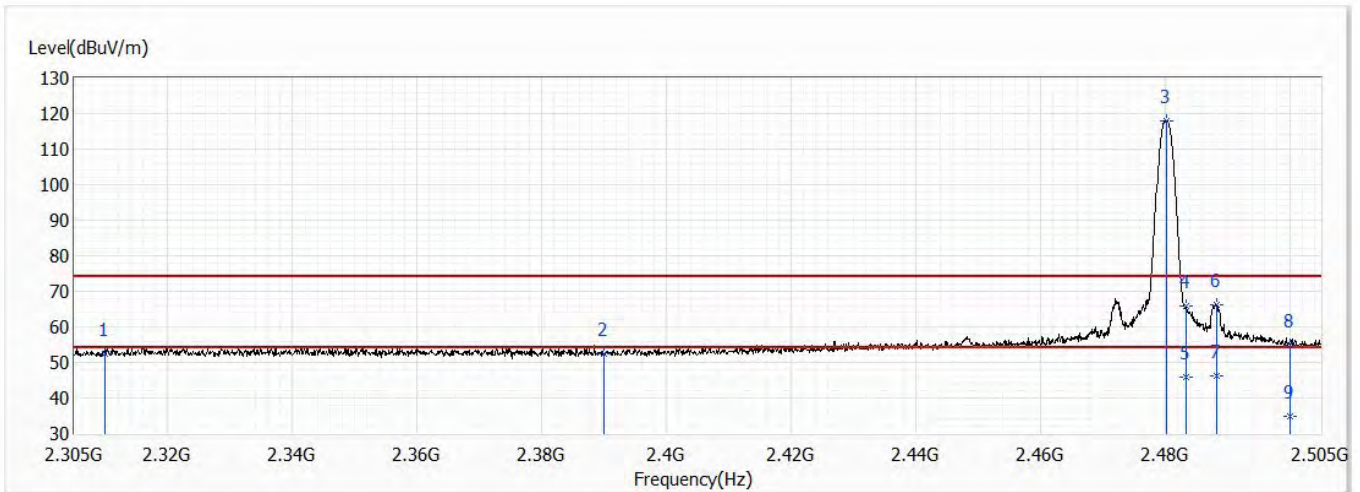


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	52.50	74.00	-21.50	39.35	13.15	PK
2	2390.000	52.44	74.00	-21.56	38.74	13.70	PK
! 3	2480.200	117.90	74.00	43.90	103.56	14.34	PK
4	2483.500	65.78	74.00	-8.22	51.42	14.36	PK
5	2483.500	45.78	54.00	-8.22	31.42	14.36	AV
6	2488.400	66.36	74.00	-7.64	51.96	14.40	PK
7	2488.400	46.36	54.00	-7.64	31.96	14.40	AV
8	2500.000	54.93	74.00	-19.07	40.45	14.48	PK
9	2500.000	34.93	54.00	-19.07	20.45	14.48	AV

Note:

1. Emission Level = Reading Level + Correct Factor.
2. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
3. The fundamental for reference only, it's not restricted by unwanted emission limit.
4. The calculation of average value :
Average value = Peak value + Duty cycle correction factor (The duty cycle correction factor refer to section "Duty Cycle")

Model No	FREECOM 4X	Site	CB2-H
Test Voltage	DC 5V	Test Date	2021/4/13
Test Mode	Mode 1: Transmit	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	BT 2.0,3DH5,Ant0,Ch 0,2.402GHz	Humidity (%RH)	61.0

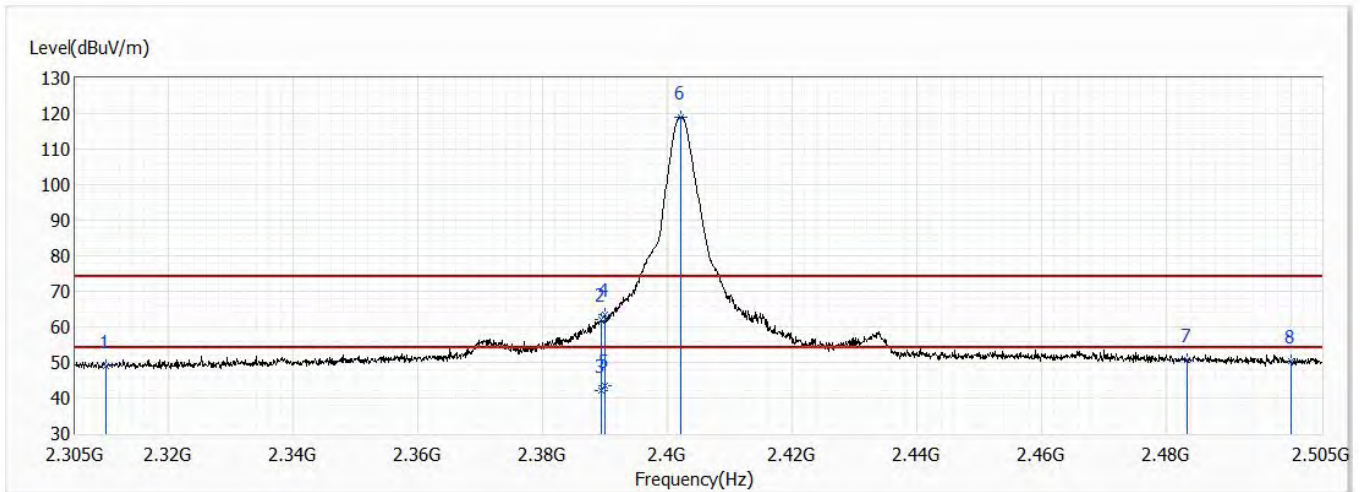


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	48.83	74.00	-25.17	35.68	13.15	PK
2	2389.300	62.18	74.00	-11.82	48.48	13.70	PK
3	2389.300	42.18	54.00	-11.82	28.48	13.70	AV
4	2390.000	63.29	74.00	-10.71	49.59	13.70	PK
5	2390.000	43.29	54.00	-10.71	29.59	13.70	AV
! 6	2402.100	119.04	74.00	45.04	105.25	13.79	PK
7	2483.500	50.82	74.00	-23.18	36.46	14.36	PK
8	2500.000	50.24	74.00	-23.76	35.76	14.48	PK

Note:

1. Emission Level = Reading Level + Correct Factor.
2. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
3. The fundamental for reference only, it's not restricted by unwanted emission limit.
4. The calculation of average value :
 Average value = Peak value + Duty cycle correction factor (The duty cycle correction factor refer to section "Duty Cycle")

Model No	FREECOM 4X	Site	CB2-H
Test Voltage	DC 5V	Test Date	2021/4/13
Test Mode	Mode 1: Transmit	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	BT 2.0,3DH5,Ant0,Ch 0,2.402GHz	Humidity (%RH)	61.0

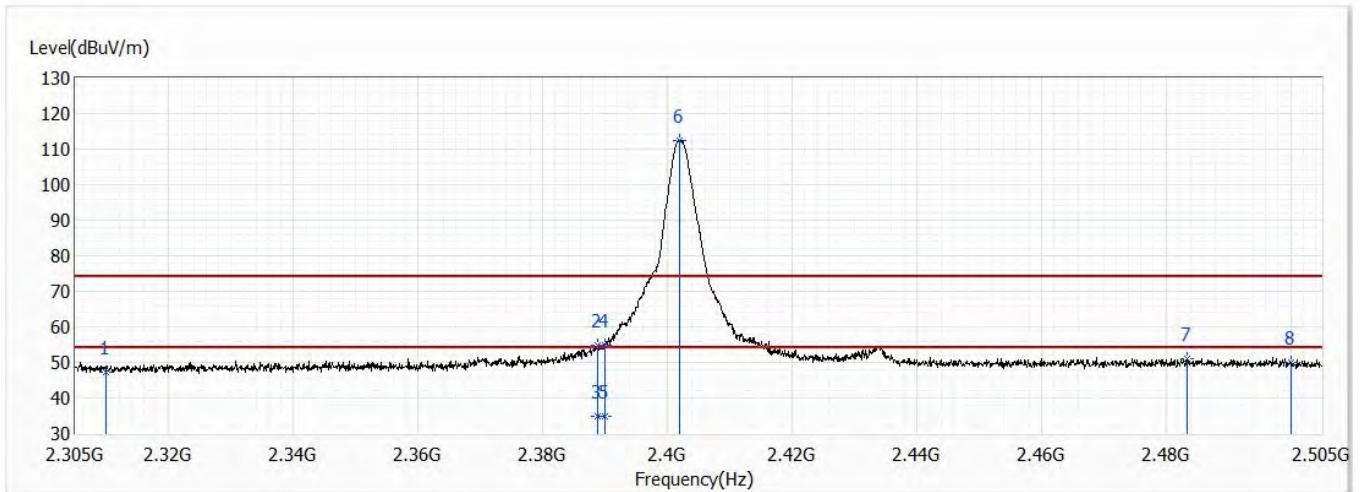


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	47.31	74.00	-26.69	34.16	13.15	PK
2	2388.800	54.94	74.00	-19.06	41.24	13.70	PK
3	2388.800	34.94	54.00	-19.06	21.24	13.70	AV
4	2390.000	54.90	74.00	-19.10	41.20	13.70	PK
5	2390.000	34.90	54.00	-19.10	21.20	13.70	AV
! 6	2402.000	112.54	74.00	38.54	98.75	13.79	PK
7	2483.500	51.04	74.00	-22.96	36.68	14.36	PK
8	2500.000	49.93	74.00	-24.07	35.45	14.48	PK

Note:

1. Emission Level = Reading Level + Correct Factor.
2. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
3. The fundamental for reference only, it's not restricted by unwanted emission limit.
4. The calculation of average value :
 Average value = Peak value + Duty cycle correction factor (The duty cycle correction factor refer to section "Duty Cycle")

Model No	FREECOM 4X	Site	CB2-H
Test Voltage	DC 5V	Test Date	2021/4/13
Test Mode	Mode 1: Transmit	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	BT 2.0,3DH5,Ant0,Ch 39,2.441GHz	Humidity (%RH)	61.0

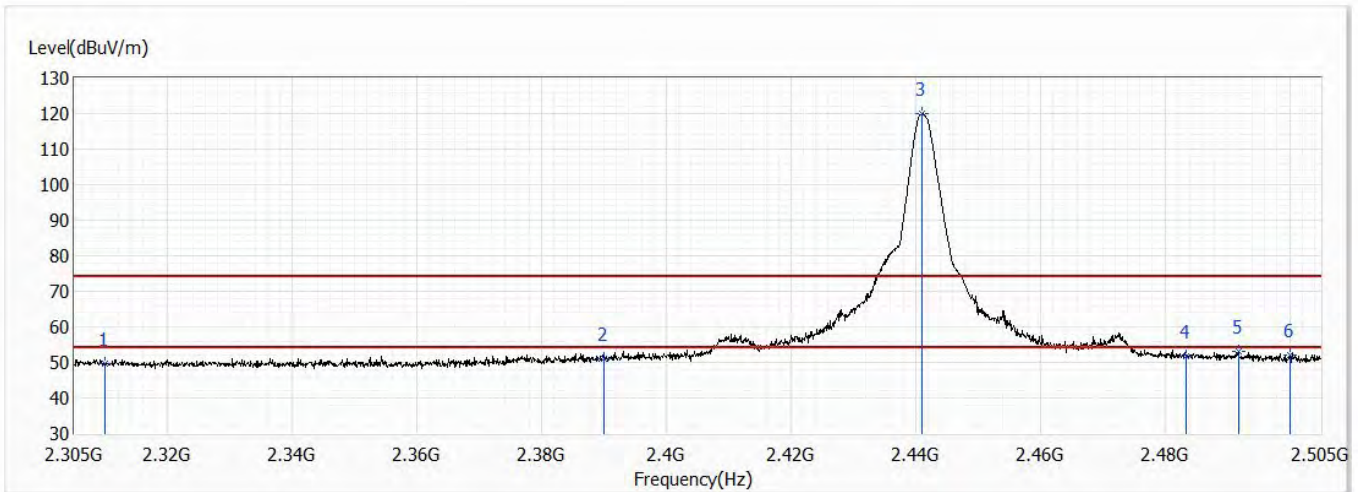


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	49.77	74.00	-24.23	36.62	13.15	PK
2	2390.000	51.07	74.00	-22.93	37.37	13.70	PK
! 3	2441.100	119.89	74.00	45.89	105.83	14.06	PK
4	2483.500	51.80	74.00	-22.20	37.44	14.36	PK
5	2491.800	52.96	74.00	-21.04	38.53	14.43	PK
6	2500.000	52.11	74.00	-21.89	37.63	14.48	PK

Note:

1. Emission Level = Reading Level + Correct Factor.
2. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
3. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	FREECOM 4X	Site	CB2-H
Test Voltage	DC 5V	Test Date	2021/4/13
Test Mode	Mode 1: Transmit	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	BT 2.0,3DH5,Ant0,Ch 39,2.441GHz	Humidity (%RH)	61.0

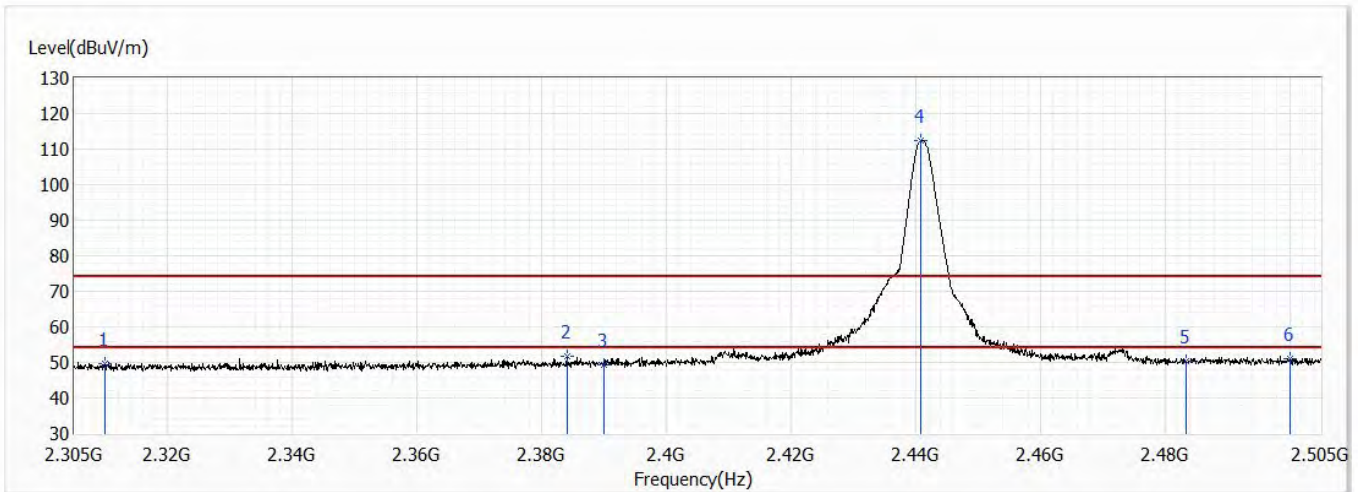


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	49.77	74.00	-24.23	36.62	13.15	PK
2	2384.000	51.57	74.00	-22.43	37.91	13.66	PK
3	2390.000	49.23	74.00	-24.77	35.53	13.70	PK
! 4	2440.900	112.40	74.00	38.40	98.34	14.06	PK
5	2483.500	50.43	74.00	-23.57	36.07	14.36	PK
6	2500.000	51.10	74.00	-22.90	36.62	14.48	PK

Note:

1. Emission Level = Reading Level + Correct Factor.
2. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
3. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	FREECOM 4X	Site	CB2-H
Test Voltage	DC 5V	Test Date	2021/4/1
Test Mode	Mode 1: Transmit	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	BT 2.0,3DH5,Ant0,Ch 78,2.48GHz	Humidity (%RH)	61.0

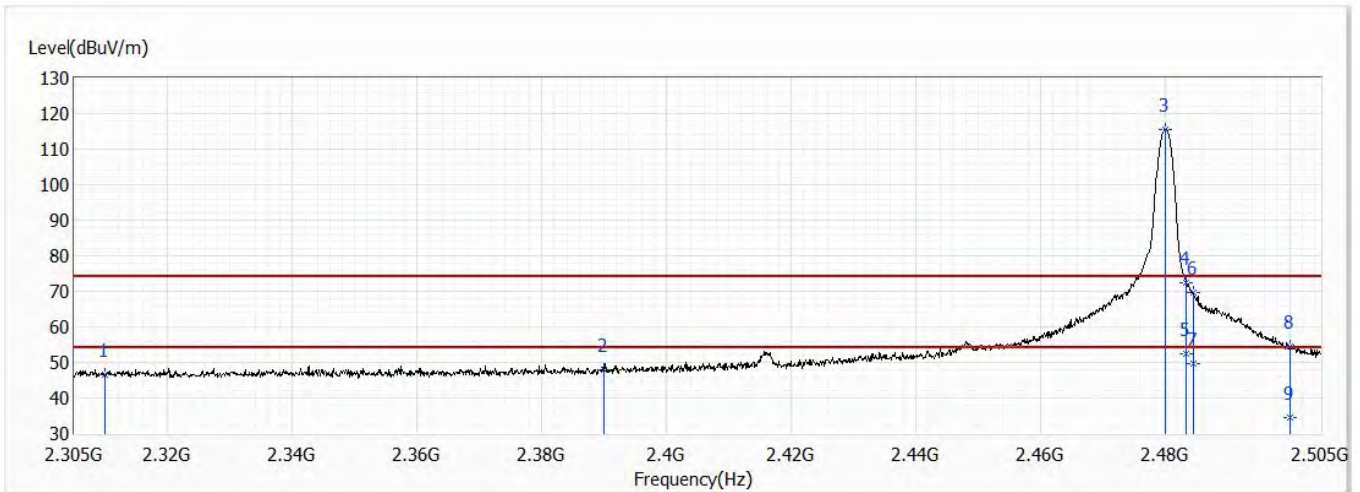


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	46.68	74.00	-27.32	33.53	13.15	PK
2	2390.000	47.79	74.00	-26.21	34.09	13.70	PK
! 3	2480.100	115.65	74.00	41.65	101.31	14.34	PK
4	2483.500	72.49	74.00	-1.51	58.13	14.36	PK
5	2483.500	52.49	54.00	-1.51	38.13	14.36	AV
6	2484.500	69.68	74.00	-4.32	55.32	14.36	PK
7	2484.500	49.68	54.00	-4.32	35.32	14.36	AV
8	2500.000	54.45	74.00	-19.55	39.97	14.48	PK
9	2500.000	34.45	54.00	-19.55	19.97	14.48	AV

Note:

1. Emission Level = Reading Level + Correct Factor.
2. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
3. The fundamental for reference only, it's not restricted by unwanted emission limit.
4. The calculation of average value :
Average value = Peak value + Duty cycle correction factor (The duty cycle correction factor refer to section "Duty Cycle")

Model No	FREECOM 4X	Site	CB2-H
Test Voltage	DC 5V	Test Date	2021/4/1
Test Mode	Mode 1: Transmit	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	BT 2.0,3DH5,Ant0,Ch 78,2.48GHz	Humidity (%RH)	61.0

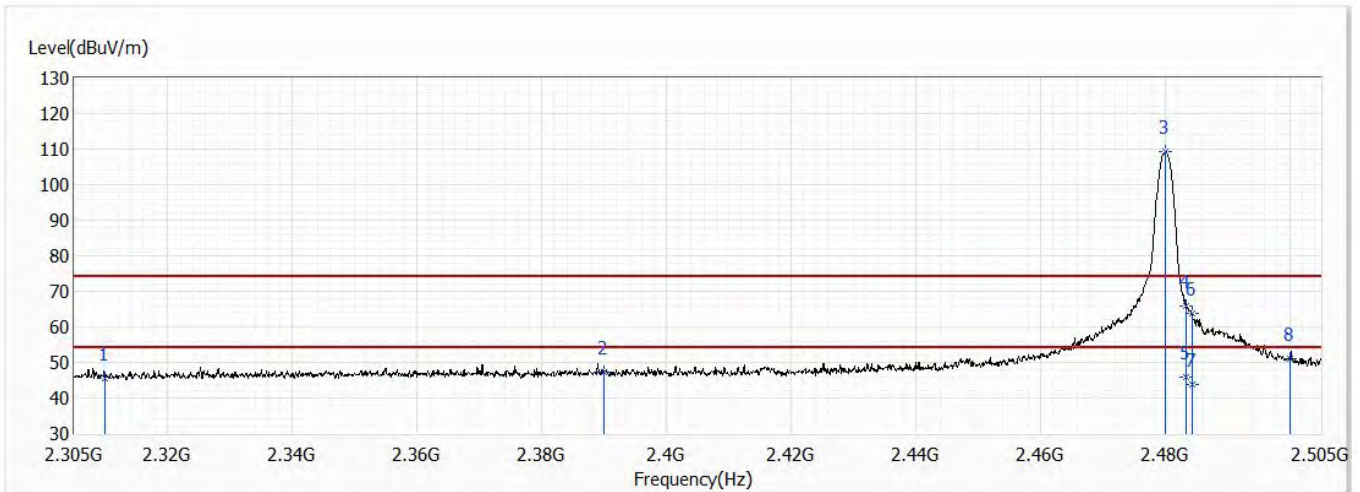


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	45.66	74.00	-28.34	32.51	13.15	PK
2	2390.000	47.22	74.00	-26.78	33.52	13.70	PK
! 3	2480.100	109.25	74.00	35.25	94.91	14.34	PK
4	2483.500	65.73	74.00	-8.27	51.37	14.36	PK
5	2483.500	45.73	54.00	-8.27	31.37	14.36	AV
6	2484.300	63.90	74.00	-10.10	49.54	14.36	PK
7	2484.300	43.90	54.00	-10.10	29.54	14.36	AV
8	2500.000	51.18	74.00	-22.82	36.70	14.48	PK

Note:

1. Emission Level = Reading Level + Correct Factor.
2. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
3. The fundamental for reference only, it's not restricted by unwanted emission limit.
4. The calculation of average value :
 Average value = Peak value + Duty cycle correction factor (The duty cycle correction factor refer to section "Duty Cycle")

Model No	FREECOM 4X	Site	CB2-H
Test Voltage	DC 5V	Test Date	2021/4/13
Test Mode	Mode 1: Transmit	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	BT 2.0,DH5,Ant0,Hopping	Humidity (%RH)	61.0

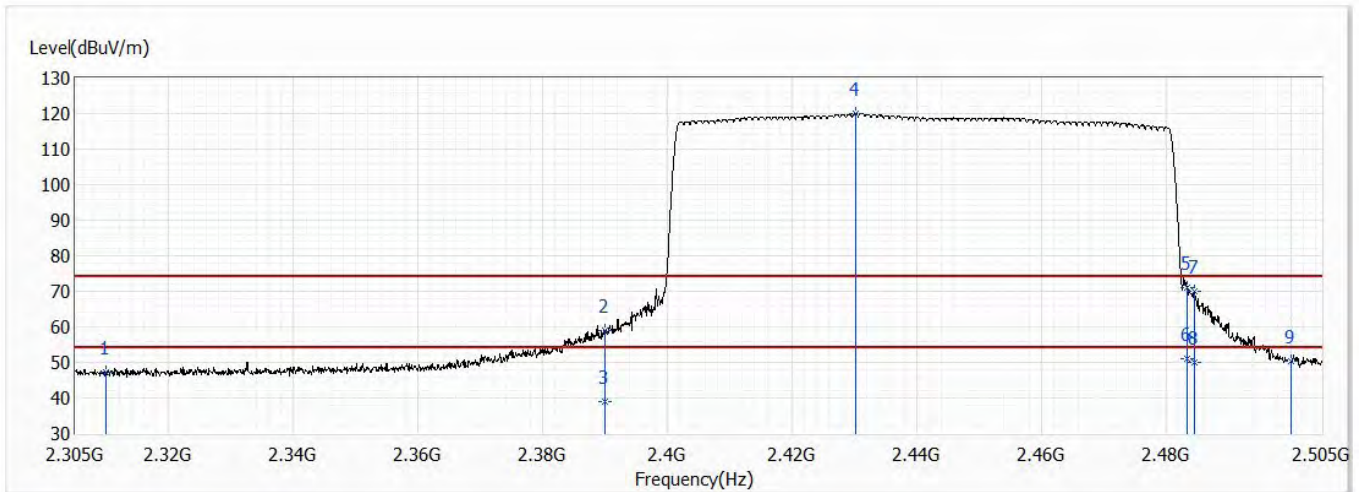


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	47.41	74.00	-26.59	34.26	13.15	PK
2	2390.000	59.13	74.00	-14.87	45.43	13.70	PK
3	2390.000	39.13	54.00	-14.87	25.43	13.70	AV
! 4	2430.300	119.86	74.00	45.86	105.87	13.99	PK
5	2483.500	71.16	74.00	-2.84	56.80	14.36	PK
6	2483.500	51.16	54.00	-2.84	36.80	14.36	AV
7	2484.500	69.88	74.00	-4.12	55.52	14.36	PK
8	2484.500	49.88	54.00	-4.12	35.52	14.36	AV
9	2500.000	50.41	74.00	-23.59	35.93	14.48	PK

Note:

1. Emission Level = Reading Level + Correct Factor.
2. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
3. The fundamental for reference only, it's not restricted by unwanted emission limit.
4. The calculation of average value :
Average value = Peak value + Duty cycle correction factor (The duty cycle correction factor refer to section "Duty Cycle")

Model No	FREECOM 4X	Site	CB2-H
Test Voltage	DC 5V	Test Date	2021/4/20
Test Mode	Mode 1: Transmit	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	BT 2.0,DH5,Ant0,Hopping	Humidity (%RH)	61.0

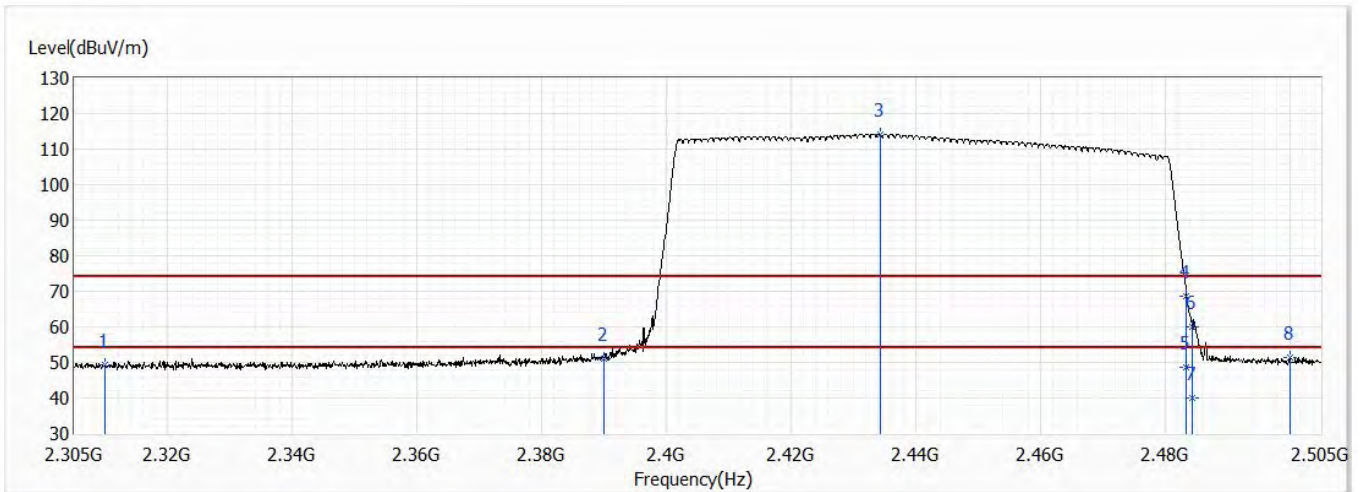


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	49.22	74.00	-24.78	36.07	13.15	PK
2	2390.000	50.98	74.00	-23.02	37.28	13.70	PK
! 3	2434.300	114.22	74.00	40.22	100.21	14.01	PK
4	2483.500	68.78	74.00	-5.22	54.42	14.36	PK
5	2483.500	48.78	54.00	-5.22	34.42	14.36	AV
6	2484.400	59.91	74.00	-14.09	45.55	14.36	PK
7	2484.400	39.91	54.00	-14.09	25.55	14.36	AV
8	2500.000	51.31	74.00	-22.69	36.83	14.48	PK

Note:

1. Emission Level = Reading Level + Correct Factor.
2. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
3. The fundamental for reference only, it's not restricted by unwanted emission limit.
4. The calculation of average value :
Average value = Peak value + Duty cycle correction factor (The duty cycle correction factor refer to section "Duty Cycle")

Model No	FREECOM 4X	Site	CB2-H
Test Voltage	DC 5V	Test Date	2021/4/13
Test Mode	Mode 1: Transmit	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	BT 2.0,3DH5,Ant0,Hopping	Humidity (%RH)	61.0

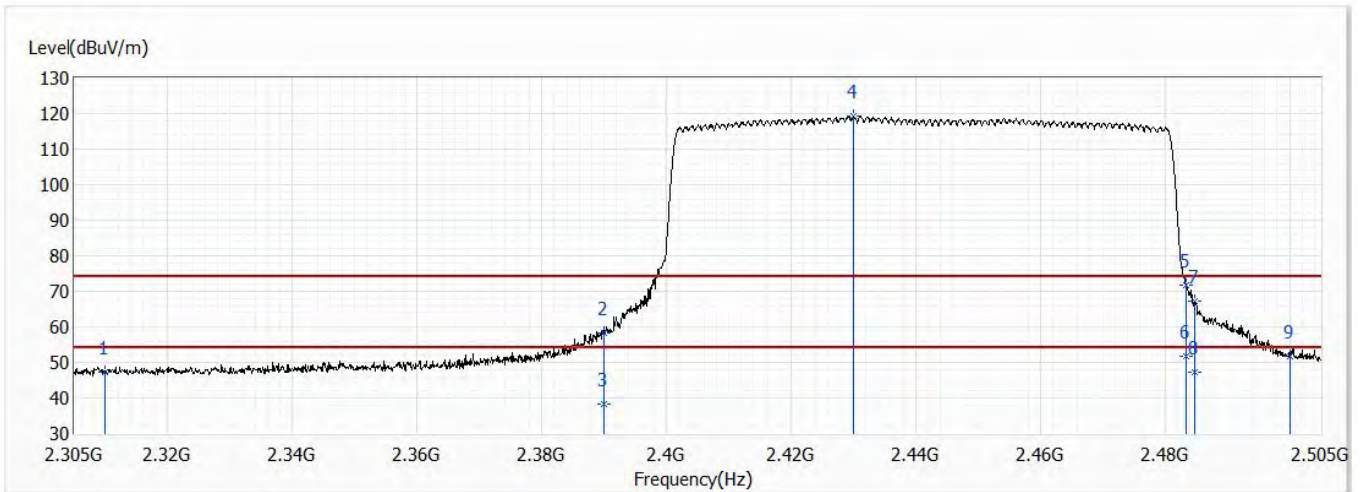


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	47.37	74.00	-26.63	34.22	13.15	PK
2	2390.000	58.15	74.00	-15.85	44.45	13.70	PK
3	2390.000	38.15	54.00	-15.85	24.45	13.70	AV
! 4	2430.100	119.29	74.00	45.29	105.30	13.99	PK
5	2483.500	71.72	74.00	-2.28	57.36	14.36	PK
6	2483.500	51.72	54.00	-2.28	37.36	14.36	AV
7	2484.800	67.17	74.00	-6.83	52.80	14.37	PK
8	2484.800	47.17	54.00	-6.83	32.80	14.37	AV
9	2500.000	51.81	74.00	-22.19	37.33	14.48	PK

Note:

1. Emission Level = Reading Level + Correct Factor.
2. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
3. The fundamental for reference only, it's not restricted by unwanted emission limit.
4. The calculation of average value :
Average value = Peak value + Duty cycle correction factor (The duty cycle correction factor refer to section "Duty Cycle")

Model No	FREECOM 4X	Site	CB2-H
Test Voltage	DC 5V	Test Date	2021/4/13
Test Mode	Mode 1: Transmit	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	BT 2.0,3DH5,Ant0,Hopping	Humidity (%RH)	61.0

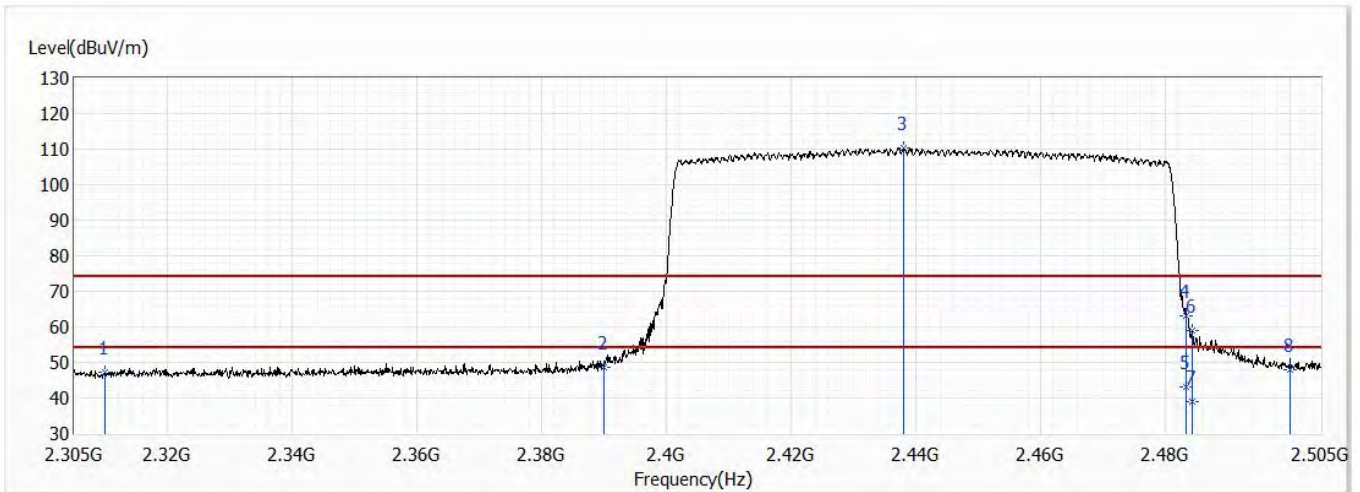


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	47.22	74.00	-26.78	34.07	13.15	PK
2	2390.000	48.53	74.00	-25.47	34.83	13.70	PK
! 3	2438.100	110.20	74.00	36.20	96.15	14.05	PK
4	2483.500	63.13	74.00	-10.87	48.77	14.36	PK
5	2483.500	43.13	54.00	-10.87	28.77	14.36	AV
6	2484.400	58.96	74.00	-15.04	44.60	14.36	PK
7	2484.400	38.96	54.00	-15.04	24.60	14.36	AV
8	2500.000	47.82	74.00	-26.18	33.34	14.48	PK

Note:

1. Emission Level = Reading Level + Correct Factor.
2. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
3. The fundamental for reference only, it's not restricted by unwanted emission limit.
4. The calculation of average value :
Average value = Peak value + Duty cycle correction factor (The duty cycle correction factor refer to section "Duty Cycle")

7. Number of hopping frequency

7.1. Test Setup

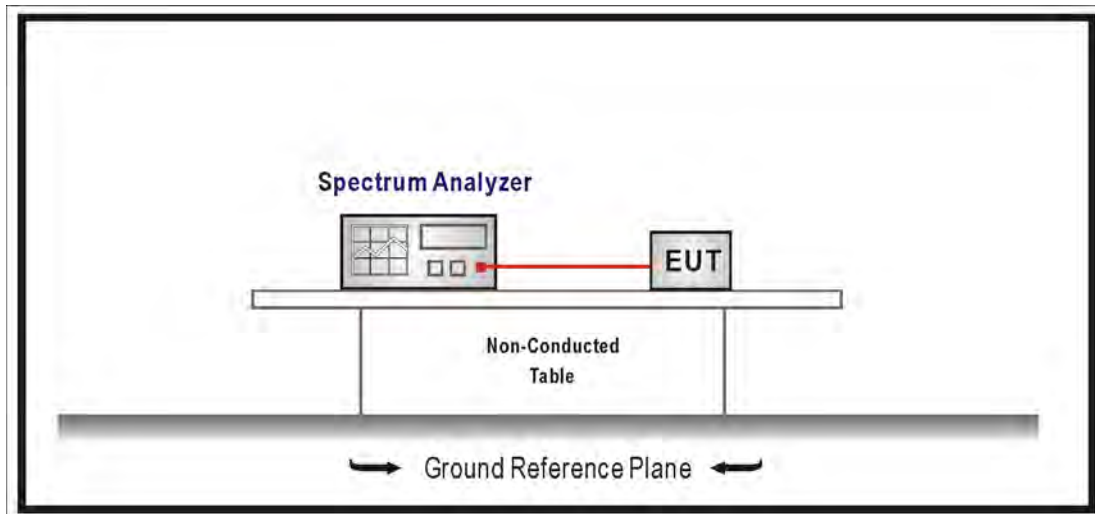

7.2. Limits

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

7.3. Test Procedures

The EUT was setup according to ANSI C63.10: 2013 and tested according to FHSS test procedure of FCC KDB 558074 D01 v05r02 for compliance to FCC 47CFR 15.247 requirements.


7.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.247: 2019

7.5. Test Result


Product	Headset		
Test Mode	Mode 1: Transmit		
Date of Test	2021/04/16	Test Site	SR12-H
Temperature(°C)	25.5	Humidity (%RH)	62.0

Frequency Range (MHz)	Measure Level (Channels)	Limit (Channels)
2402 - 2480	79	≥ 75

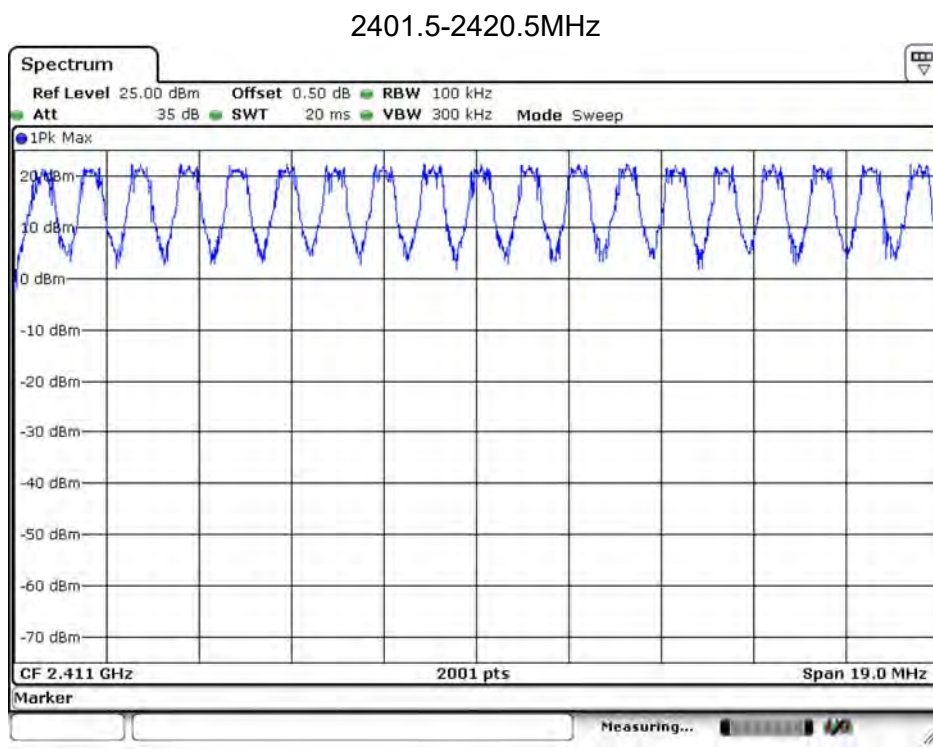


Date: 16.APR.2021 15:40:39

2420.5-2440.5MHz

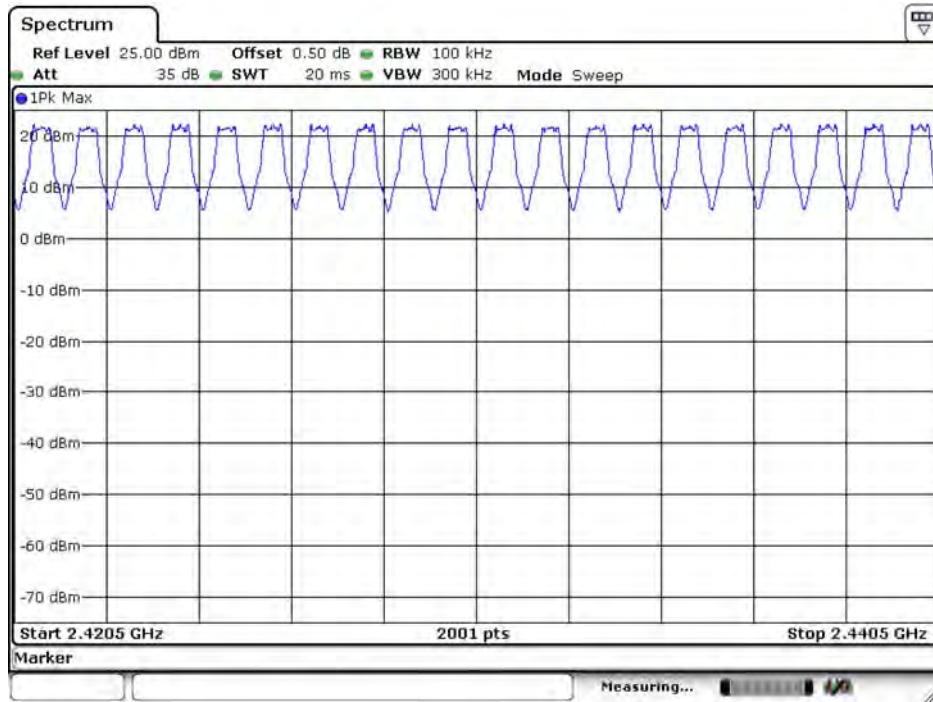


Date: 16 APR 2021 15:54:43

2440.5-2460.5MHz

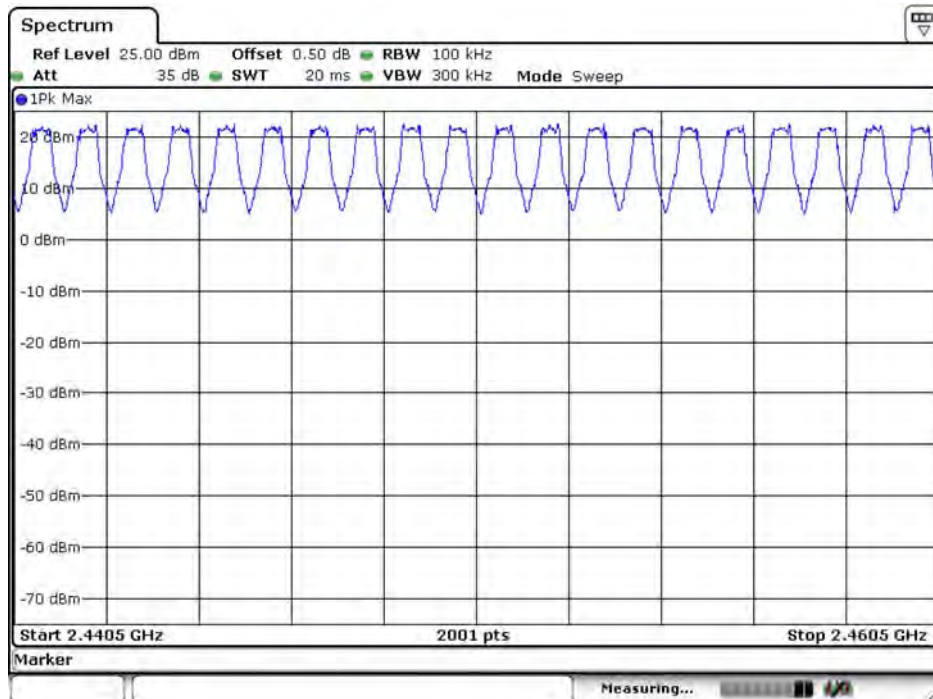

Date: 16 APR 2021 15:57:32


2460.5-2480.5MHz

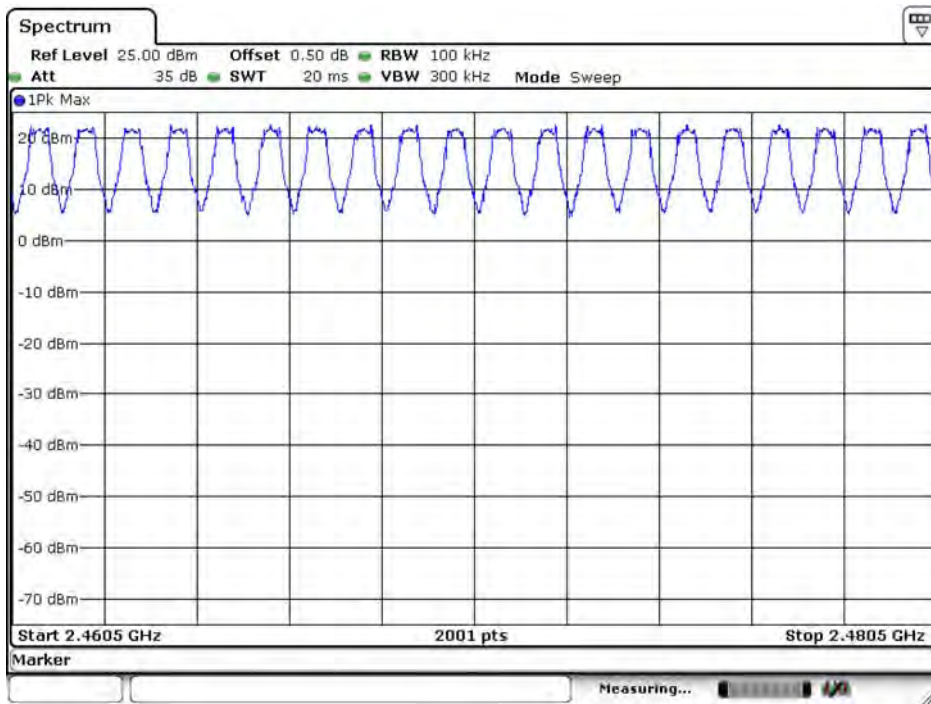

Date: 16 APR.2021 15:59:13

8. Carrier Frequency Separation

8.1. Test Setup

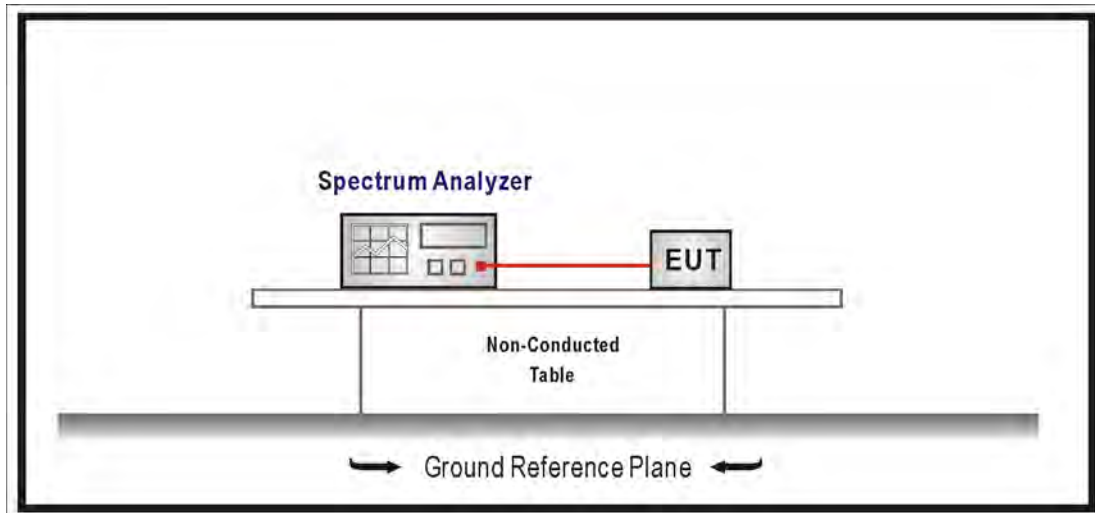

8.2. Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an Maximum peak conducted output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

8.3. Test Procedures

The EUT was setup according to ANSI C63.10: 2013 and tested according to FHSS test procedure of FCC KDB 558074 D01 v05r02 for compliance to FCC 47CFR 15.247 requirements.

8.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.247: 2019

8.5. Test Result

Product	Headset		
Test Mode	Mode 1: Transmit		
Date of Test	2021/04/16	Test Site	SR12-H
Temperature(°C)	25.5	Humidity (%RH)	62.0

GFSK


Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)
00	2402	1.010	≥ 0.743
39	2441	1.000	≥ 0.743
78	2480	0.995	≥ 0.741

8-DPSK

Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)
00	2402	0.995	≥ 0.950
39	2441	1.005	≥ 0.955
78	2480	1.010	≥ 0.955


GFSK

Channel 00

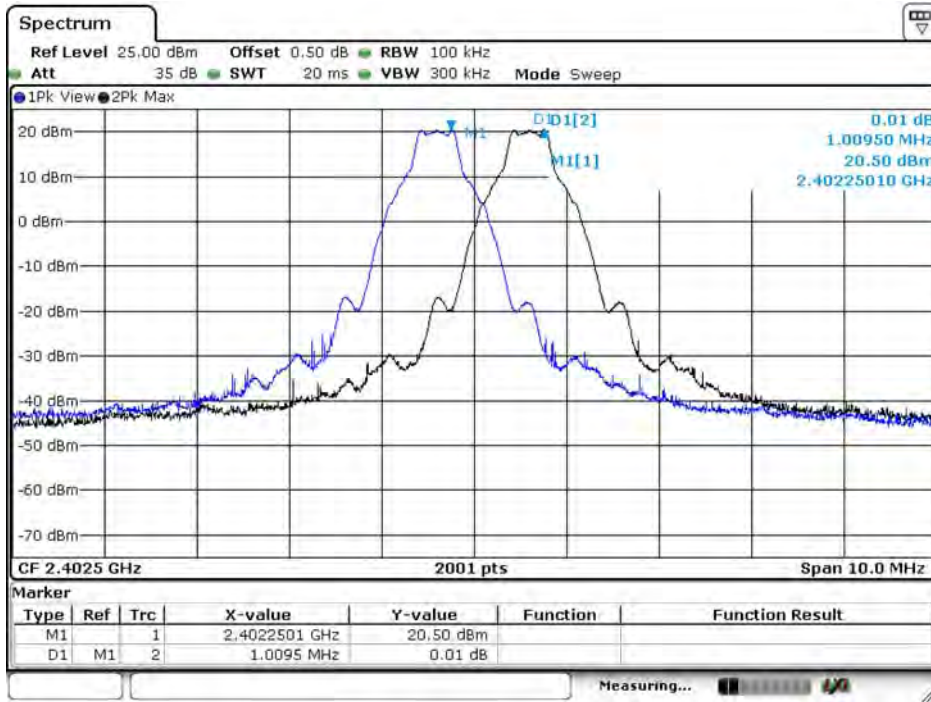


Date: 16 APR 2021 12:10:32

Channel 39

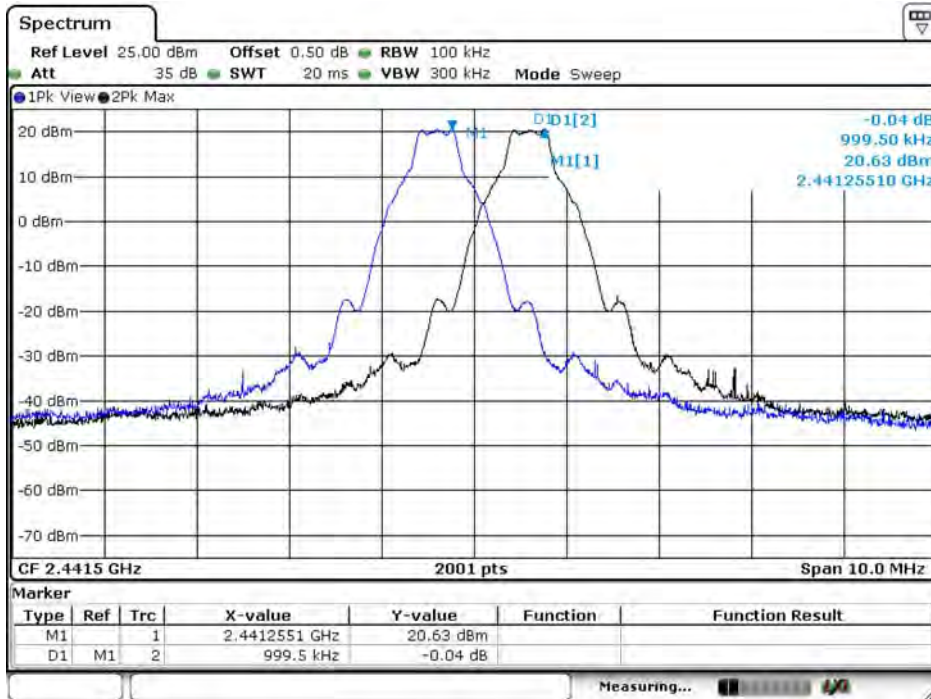

Date: 16 APR 2021 12:17:34


Channel 78

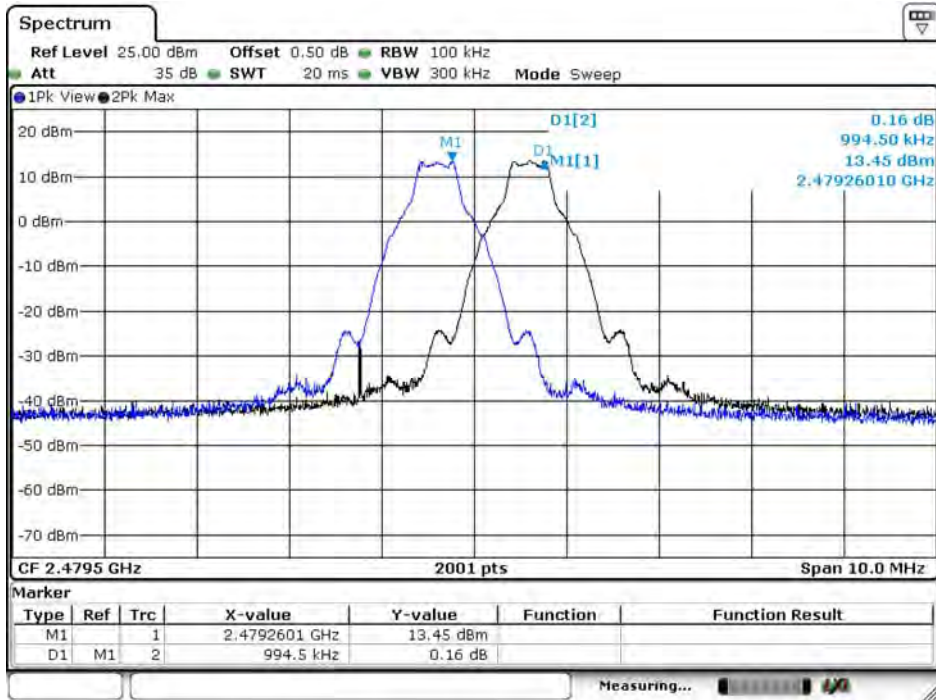

Date: 16 APR 2021 13:07:51


8-DPSK

Channel 00

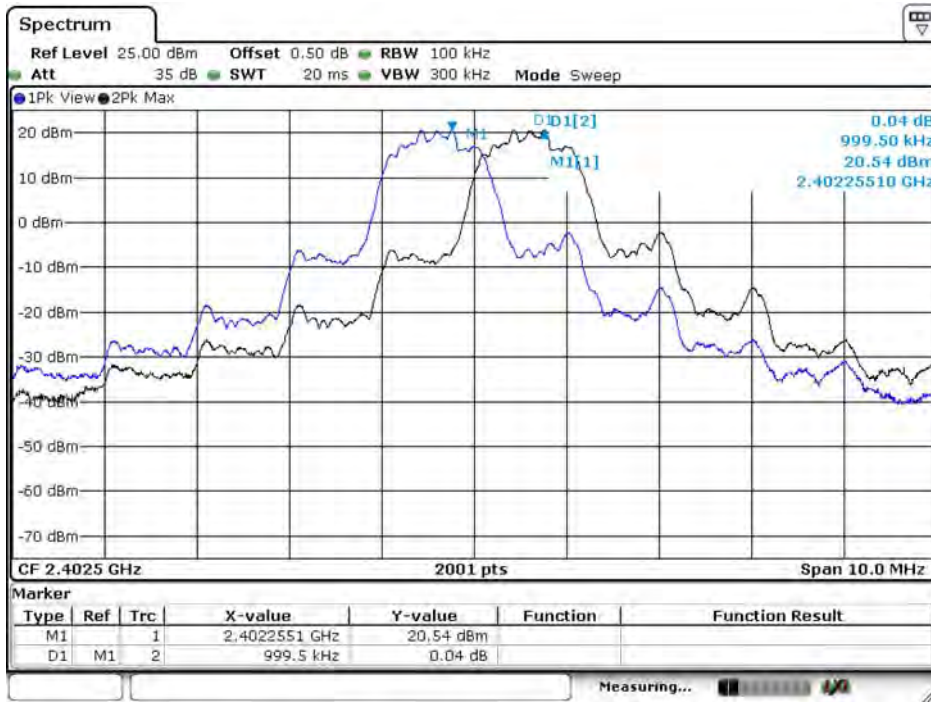


Date: 16 APR 2021 14:38:36

Channel 39

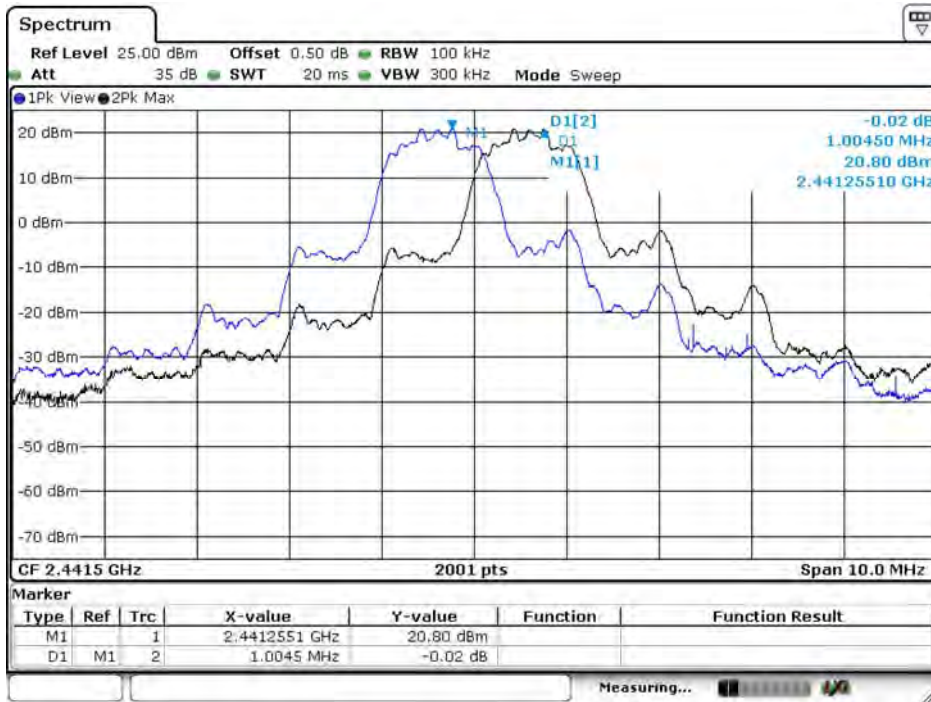

Date: 16 APR 2021 13:46:07


Channel 78

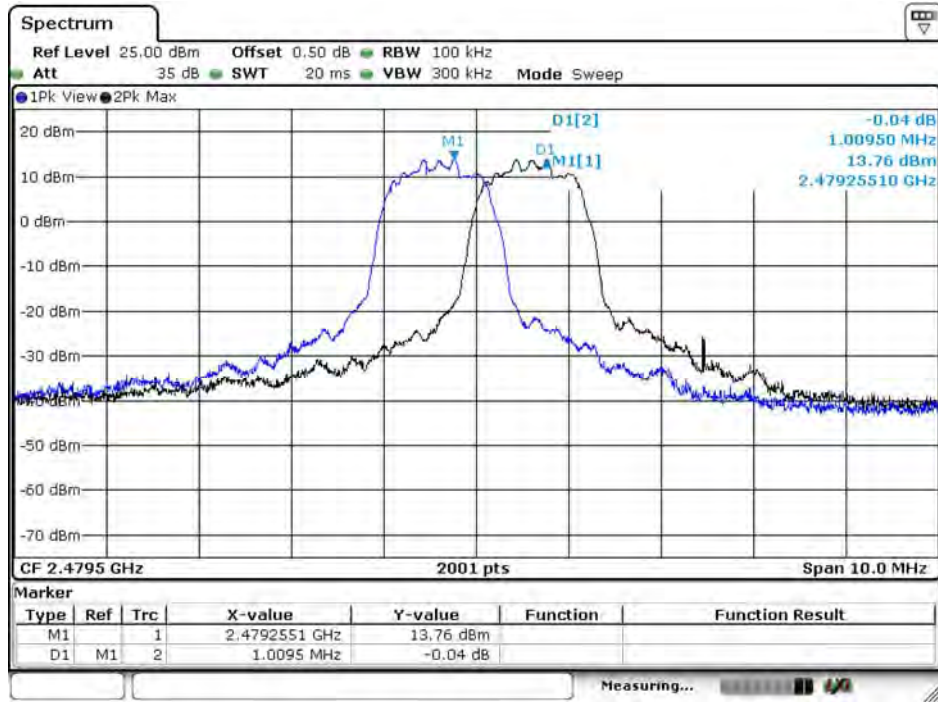

Date: 16 APR 2021 13:39:22

9. 20dB Bandwidth

9.1. Test Setup

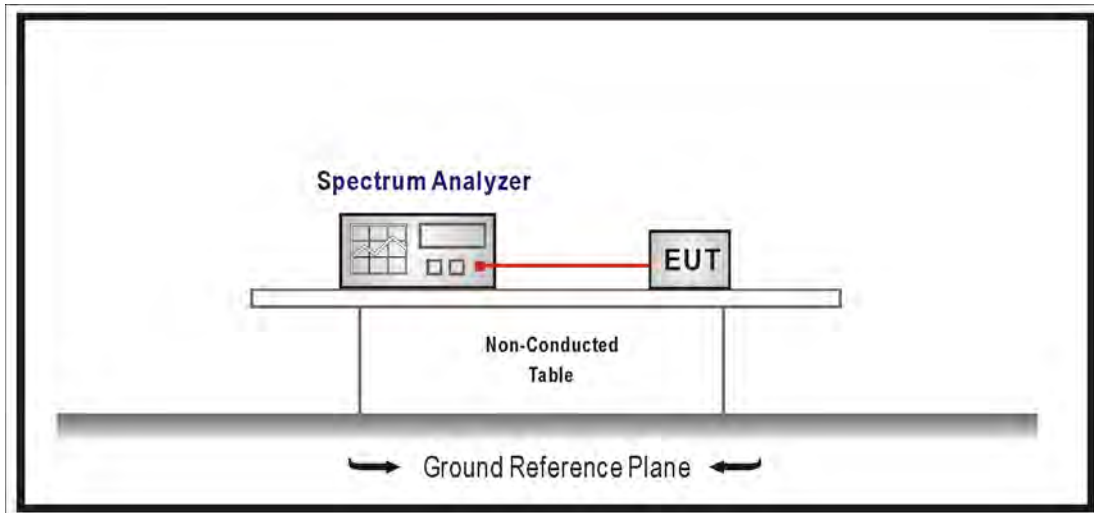

9.2. Limits

N/A

9.3. Test Procedures

The EUT was setup according to ANSI C63.10: 2013 and tested according to FHSS test procedure of FCC KDB 558074 D01 v05r02 for compliance to FCC 47CFR 15.247 requirements

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
RBW \geq 1% of the 20 dB bandwidth, VBW \geq RBW, Sweep = auto, Detector function = peak, Trace = max hold, The EUT should be transmitting at its maximum data rate.

9.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.247: 2019.

9.5. Test Result

Product	Headset		
Test Mode	Mode 1: Transmit		
Date of Test	2021/04/16~2021/06/09	Test Site	SR12-H
Temperature(°C)	22 ~ 26	Humidity (%RH)	58 ~ 71

GFSK


Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)
00	2402	1.114	---
39	2441	1.114	---
78	2480	1.112	---

8-DPSK

Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)
00	2402	1.424	---
39	2441	1.432	---
78	2480	1.437	---

GFSK

Channel 00

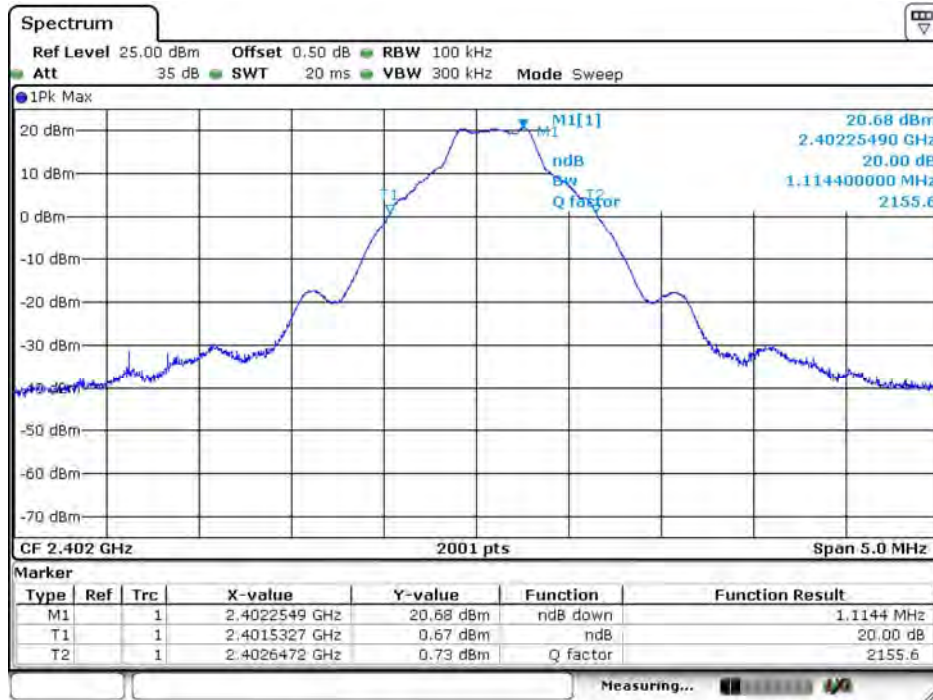

Date: 16 APR 2021 15:26:25


Channel 39



Date: 16 APR 2021 15:33:11


8-DPSK

Channel 00

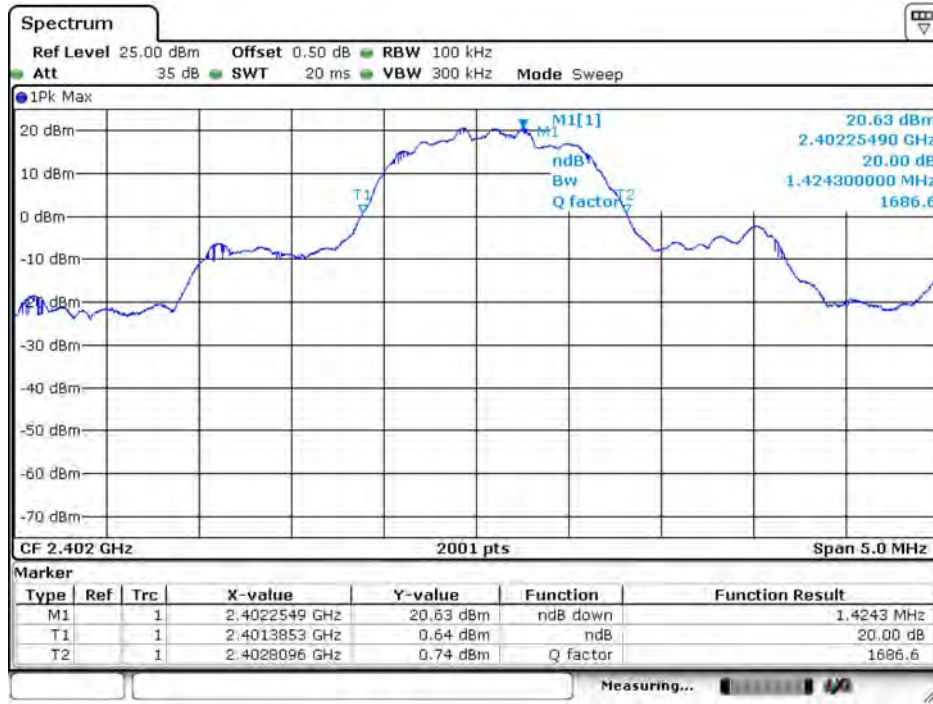


Date: 16 APR 2021 15:34:57

Channel 39

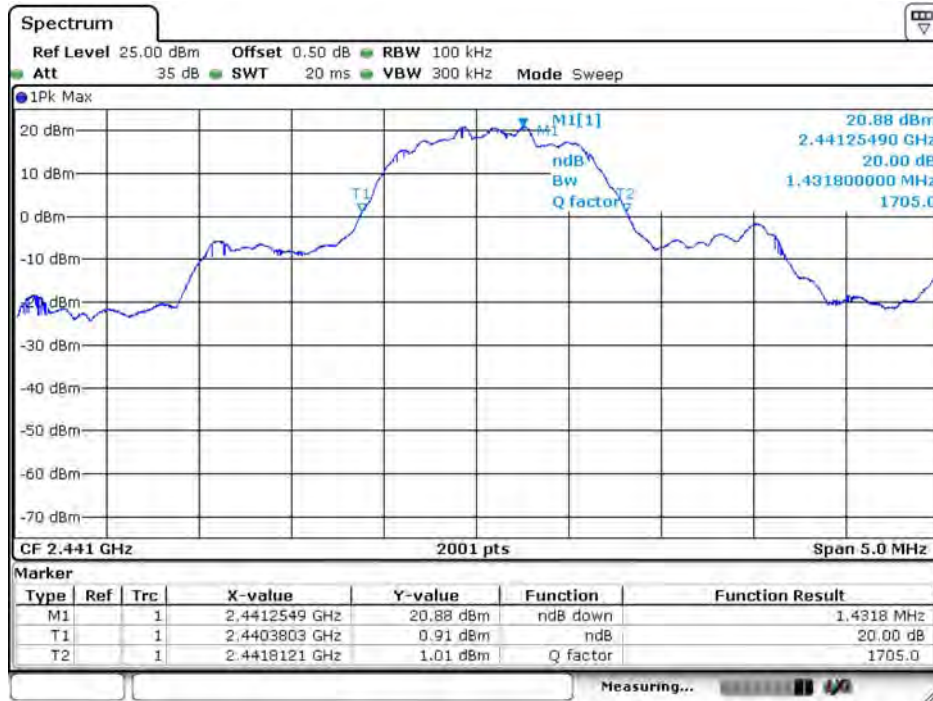

Date: 16 APR 2021 15:34:08


Channel 78

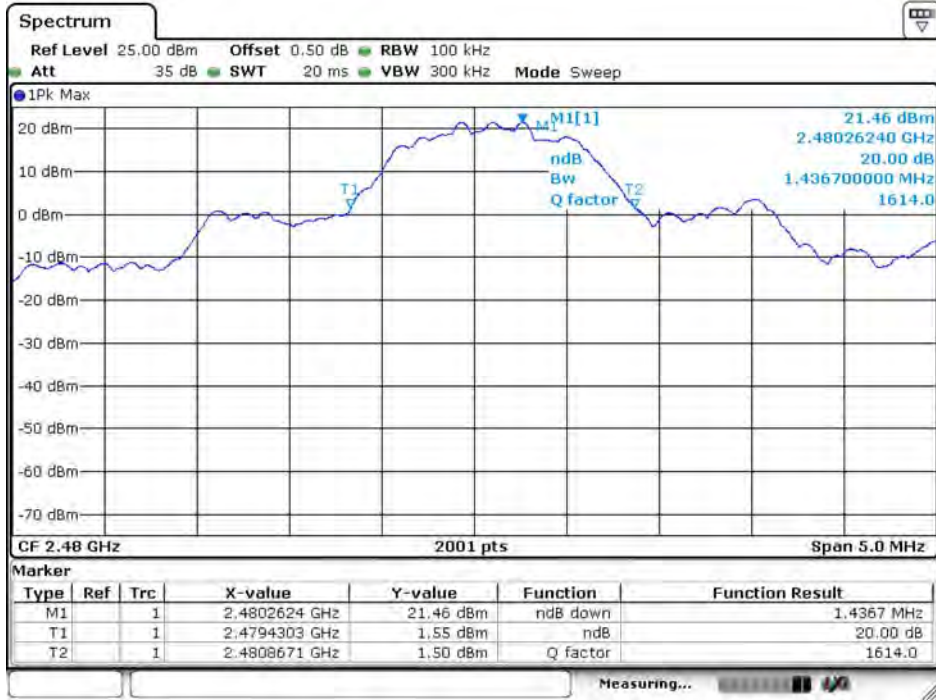

Date: 9.09.2021 14:39:13

10. Dwell Time

10.1. Test Setup

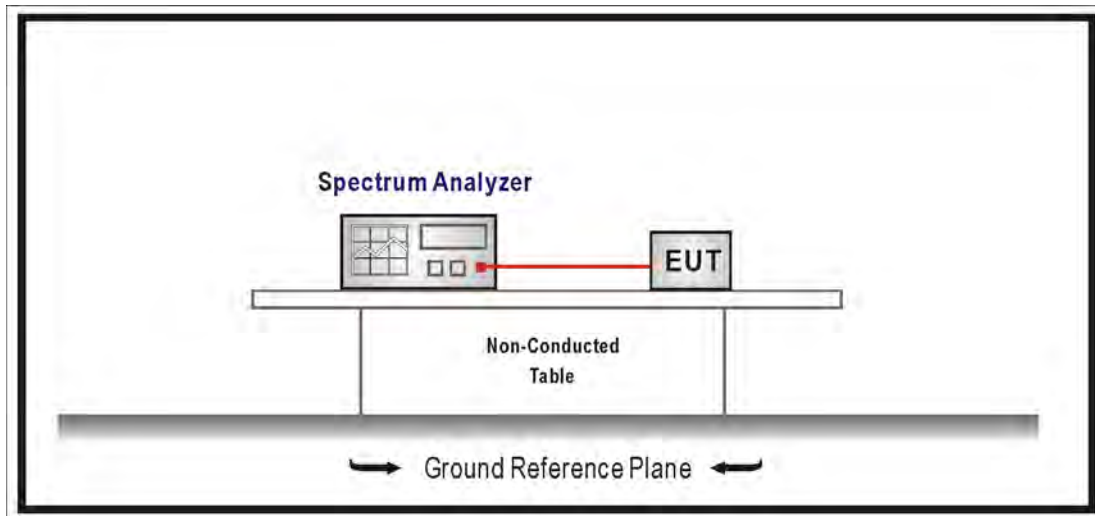

10.2. Limits

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

For frequency hopping systems operating in the 2400-2483.5 MHz bands. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

For frequency hopping systems operating in the 5725-5850 MHz bands. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

10.3. Test Procedures

The EUT was setup according to ANSI C63.10: 2013 and tested according to FHSS test procedure of FCC KDB 558074 D01 v05r02 for compliance to FCC 47CFR 15.247 requirements

Span = zero span, centered on a hopping channel, RBW = 1 MHz, VBW \geq RBW,
Sweep = as necessary to capture the entire dwell time per hopping channel,
Detector function = peak, Trace = max hold.

10.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.247: 2019

10.5. Test Result

Product	Headset		
Test Mode	Mode 1: Transmit		
Date of Test	2021/04/16	Test Site	SR12-H
Temperature(°C)	25.5	Humidity (%RH)	62.0

GFSK

Occupancy Time of Frequency Hopping System

A) 2402MHz Test Time Period: $0.4 \times 79 = 31.60 \text{sec}$, Time slot length : 2.882 ms = 0.002882 sec

Dwell Time : $0.002882 \times (266.67/79) \times 31.60 = 0.3074$ sec ◦

B) 2441MHz Test Time Period: $0.4 \times 79 = 31.60 \text{sec}$, Time slot length : 2.886 ms = 0.002886 sec

Dwell Time : $0.002886 \times (266.67/79) \times 31.60 = 0.3078$ sec ◦

C) 2480MHz Test Time Period: $0.4 \times 79 = 31.60 \text{sec}$, Time slot length : 2.884 ms = 0.002884 sec

Dwell Time : $0.002884 \times (266.67/79) \times 31.60 = 0.3076$ sec ◦

Test Result: The Average Occupancy Time of Each Highest , Middle and Lowest Channel Is Less Than 0.4sec , And Corresponds to The Standard ◦

8-DPSK

Occupancy Time of Frequency Hopping System

A) 2402MHz Test Time Period: $0.4 \times 79 = 31.60 \text{sec}$, Time slot length : 2.892 ms = 0.002892 sec

Dwell Time : $0.002892 \times (266.67/79) \times 31.60 = 0.3085$ sec ◦

B) 2441MHz Test Time Period: $0.4 \times 79 = 31.60 \text{sec}$, Time slot length : 2.892 ms = 0.002892 sec

Dwell Time : $0.002892 \times (266.67/79) \times 31.60 = 0.3085$ sec ◦


C) 2480MHz Test Time Period: $0.4 \times 79 = 31.60 \text{sec}$, Time slot length : 2.896 ms = 0.002896 sec

Dwell Time : $0.002896 \times (266.67/79) \times 31.60 = 0.3089$ sec ◦

Test Result: The Average Occupancy Time of Each Highest , Middle and Lowest Channel Is Less Than 0.4sec , And Corresponds to The Standard ◦


GFSK

Hop rate-2402MHz

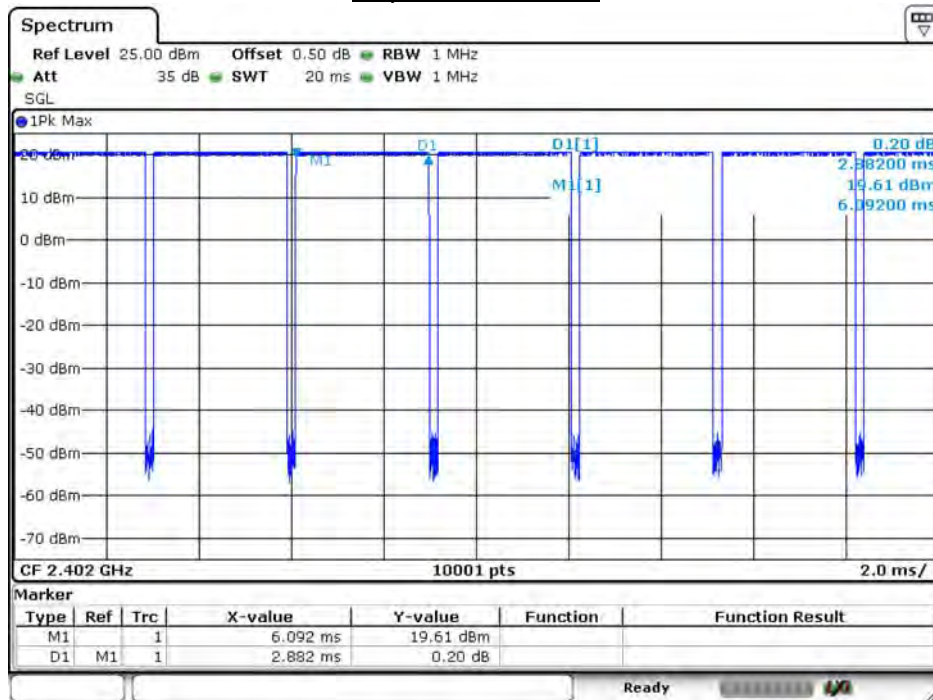


Date: 16.APR.2021 11:12:25

Hop rate-2441MHz

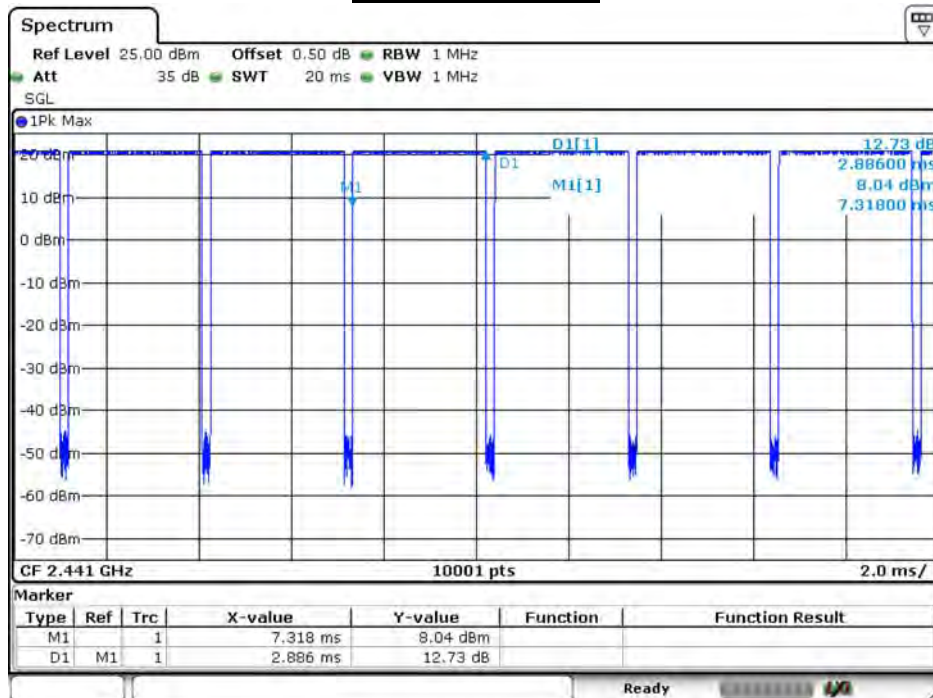

Date: 16.APR.2021 11:13:50

Hop rate-2480MHz

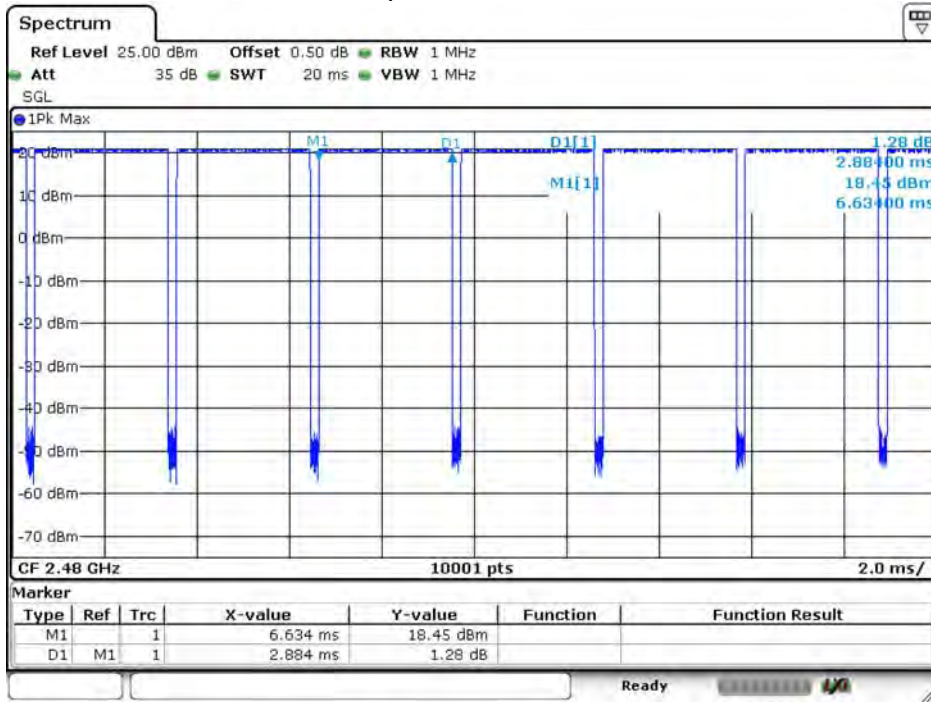


Date: 16 APR 2021 11:15:11

Note: Dwell time = time slot length * hop rate / number of hopping channels * period


8-DPSK

Hop rate-2402MHz

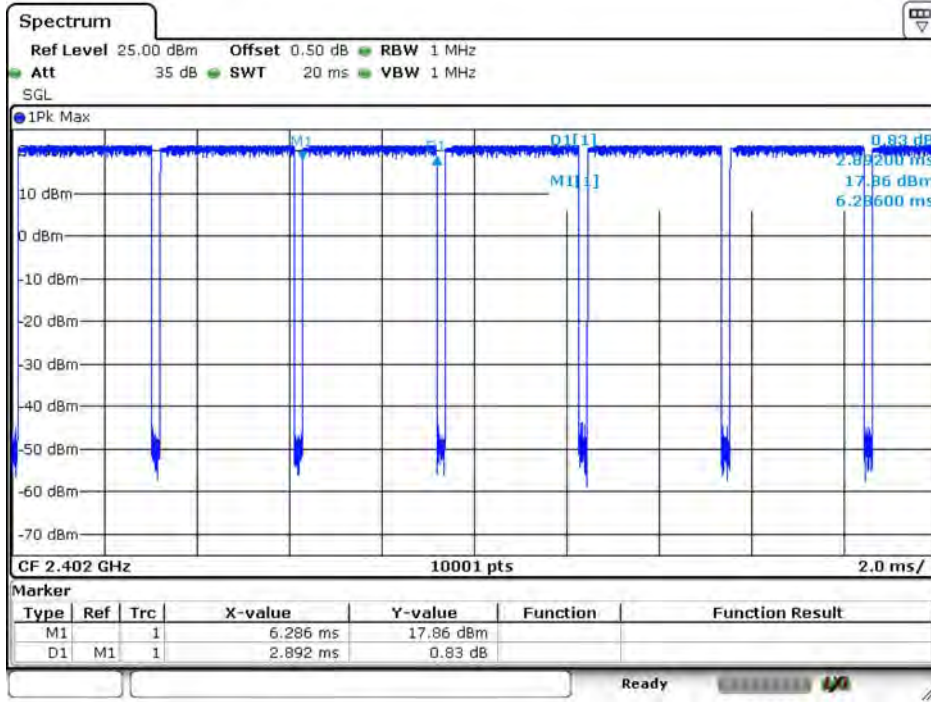


Date: 16 APR 2021 11:21:15

Hop rate-2441MHz

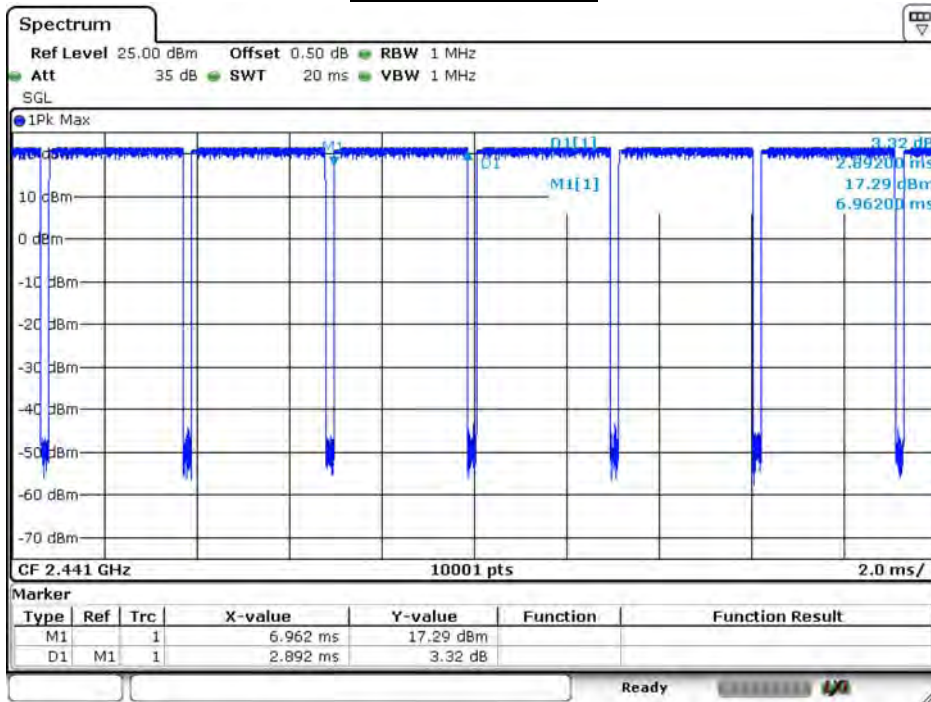

Date: 16 APR 2021 11:20:21

Hop rate-2480MHz

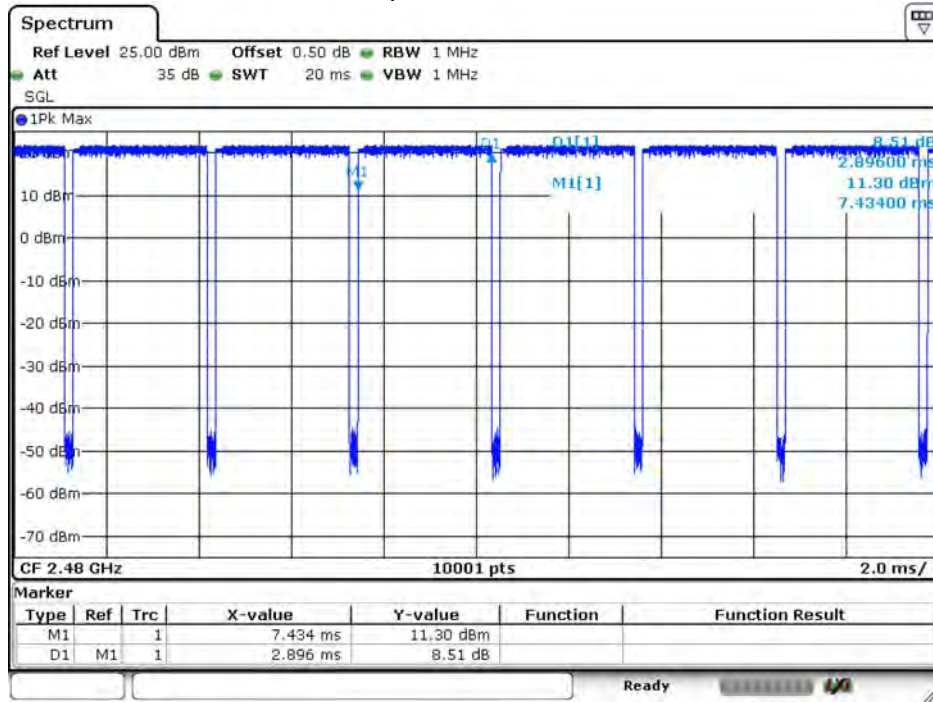

Date: 16.APR.2021 11:16:30

Note: Dwell time = time slot length * hop rate / number of hopping channels * period