





<2Mbps>

Hopping Mode Low Band Edge Plot

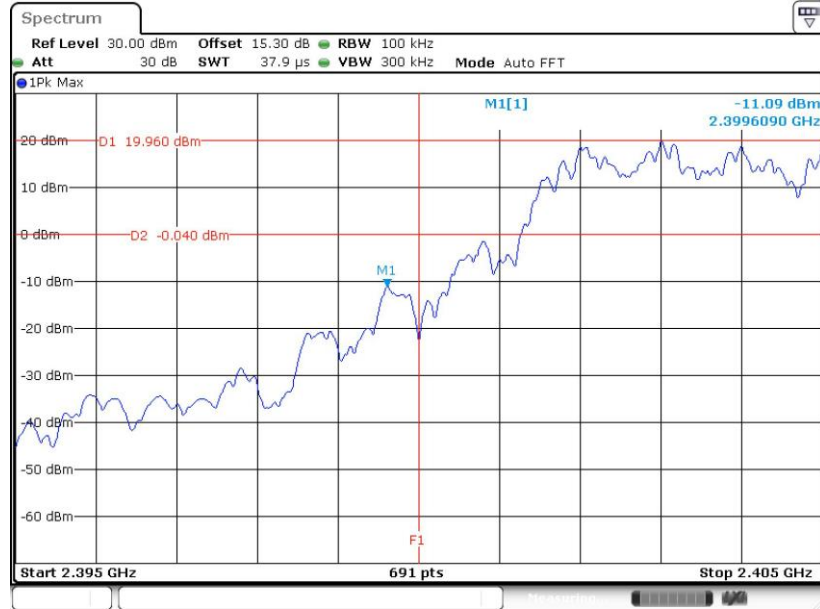

Date: 1.JUN.2024 11:05:39

Hopping Mode High Band Edge Plot

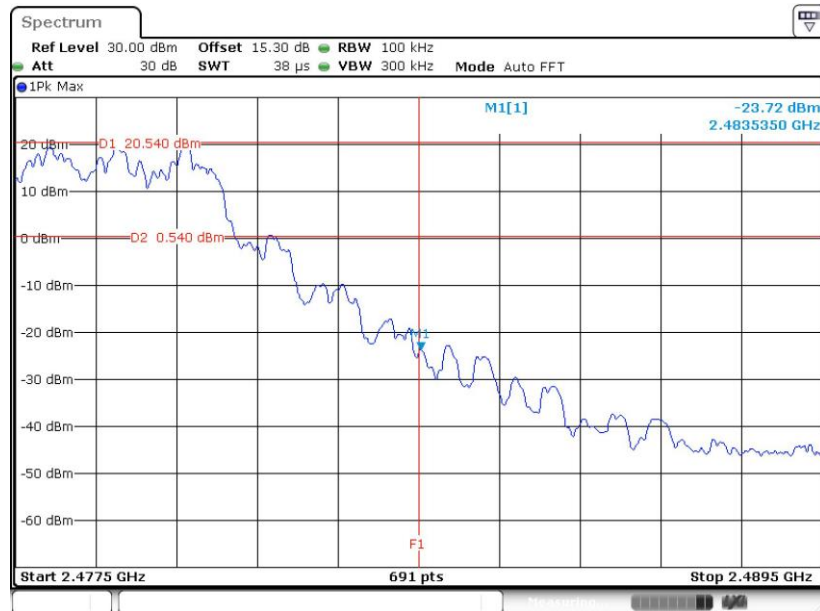


Date: 1.JUN.2024 11:17:45



<3Mbps>

Hopping Mode Low Band Edge Plot

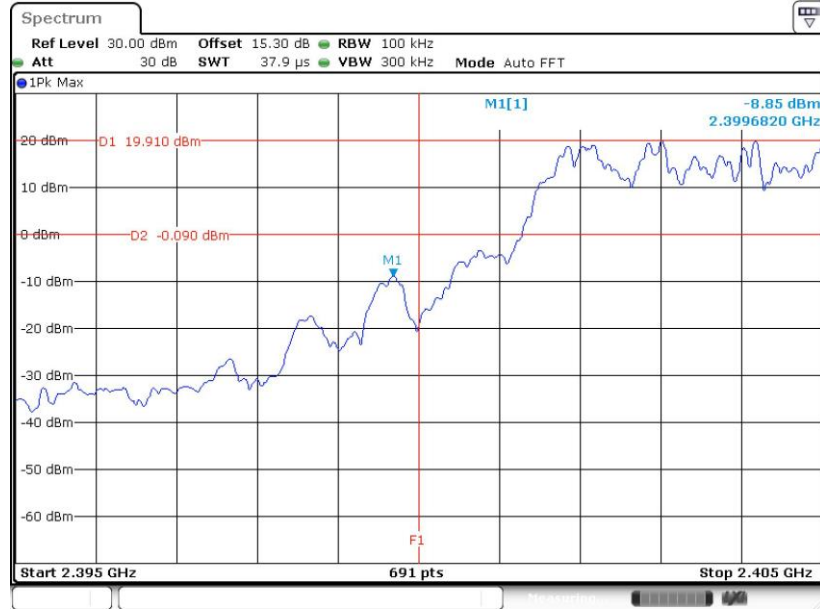

Date: 1.JUN.2024 11:26:29

Hopping Mode High Band Edge Plot




Date: 1.JUN.2024 11:42:18



Ant 1


<1Mbps>

Hopping Mode Low Band Edge Plot

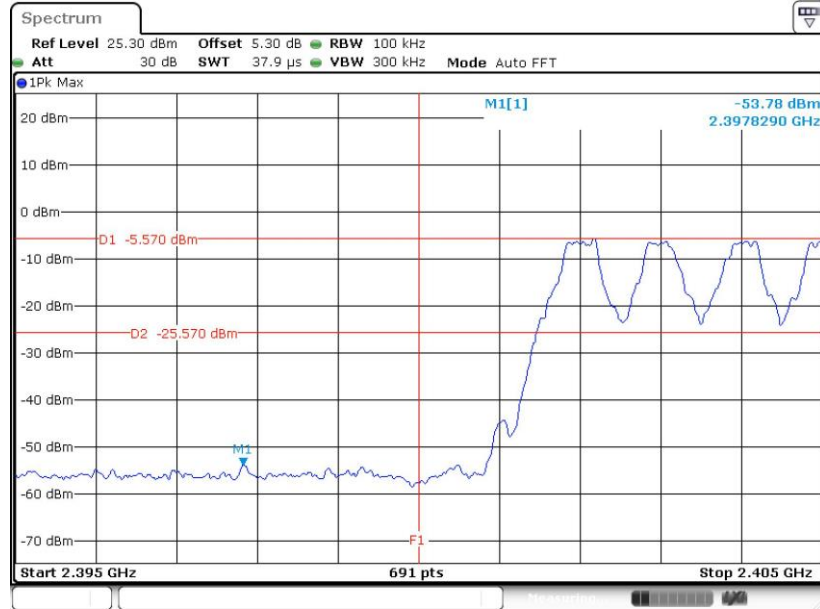

Date: 1.JUN.2024 12:18:16

Hopping Mode High Band Edge Plot

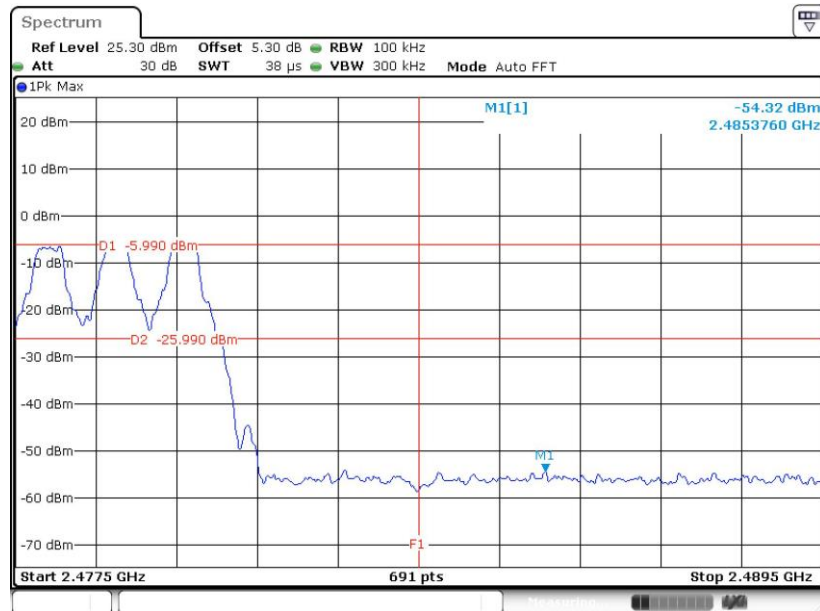


Date: 1.JUN.2024 14:22:57




<2Mbps>

Hopping Mode Low Band Edge Plot

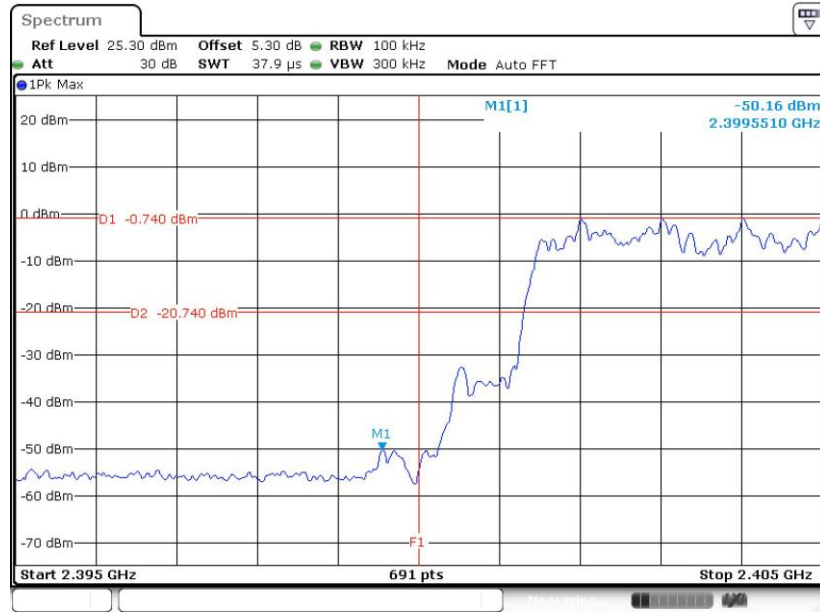

Date: 1.JUN.2024 14:30:09

Hopping Mode High Band Edge Plot

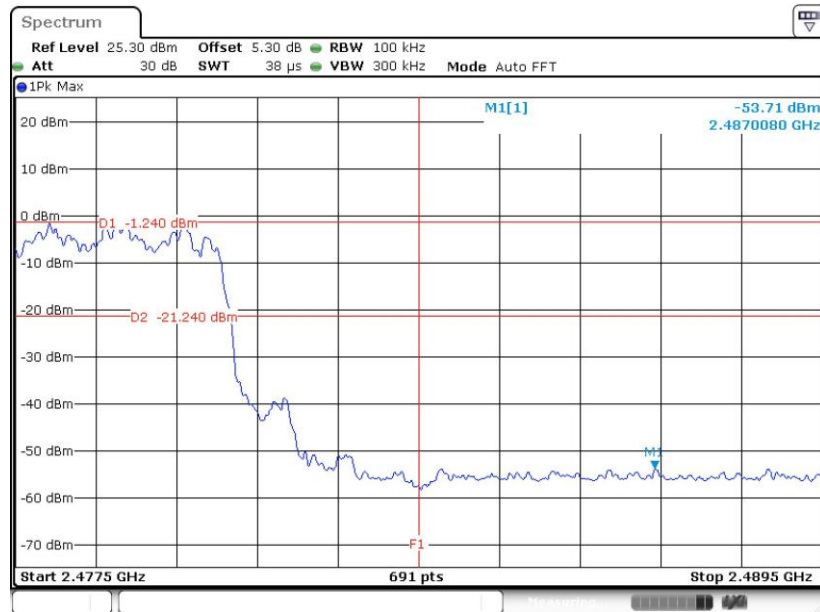


Date: 1.JUN.2024 14:43:31




<3Mbps>

Hopping Mode Low Band Edge Plot

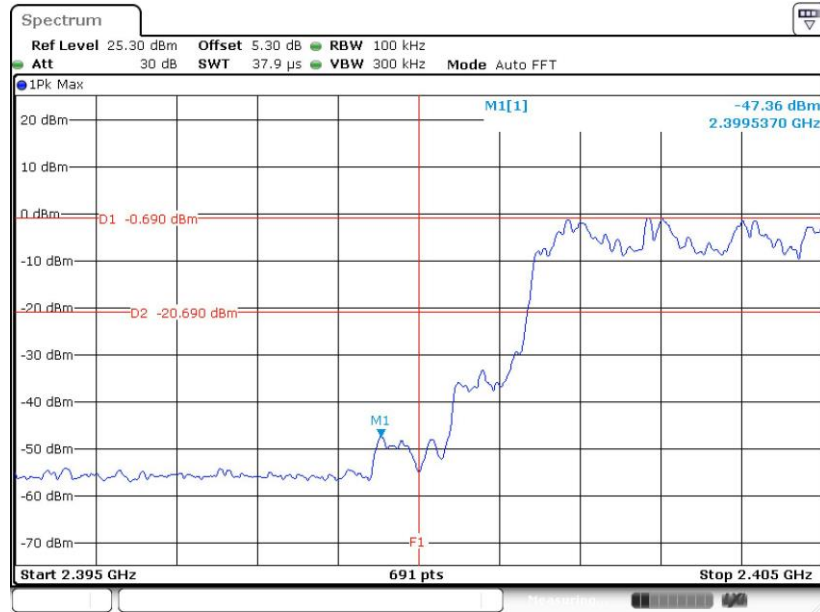

Date: 1.JUN.2024 14:48:52

Hopping Mode High Band Edge Plot

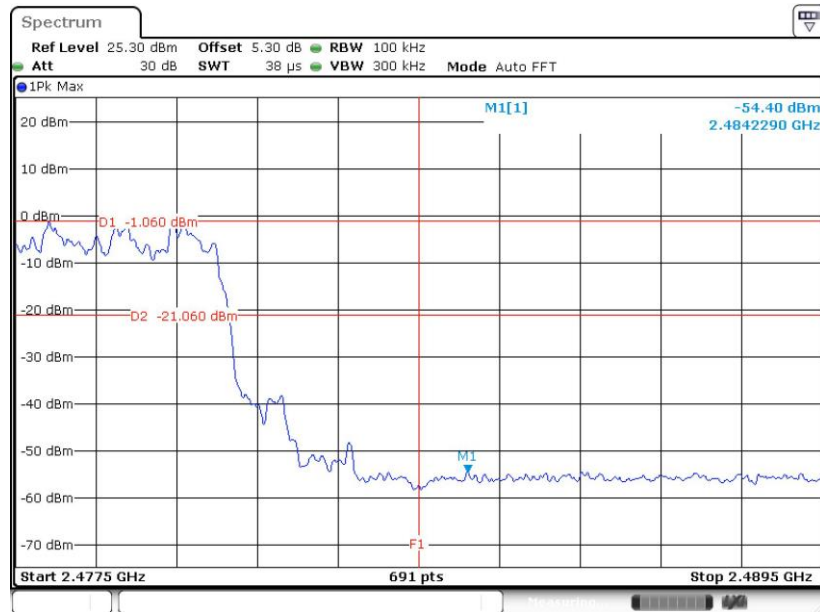

Date: 1.JUN.2024 14:57:55

## 3.7 Conducted Spurious Emission Measurement

### 3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

### 3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.7.4 Test Setup






### 3.7.5 Test Result of Conducted Spurious Emission

Ant 2


<1Mbps>

CSE Plot on Ch 00

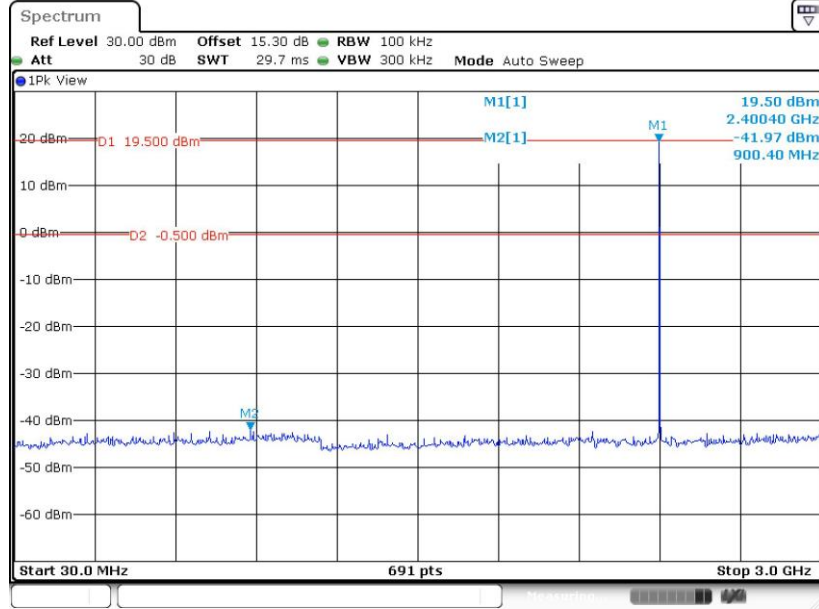

Date: 1.JUN.2024 10:39:55


CSE Plot on Ch 00

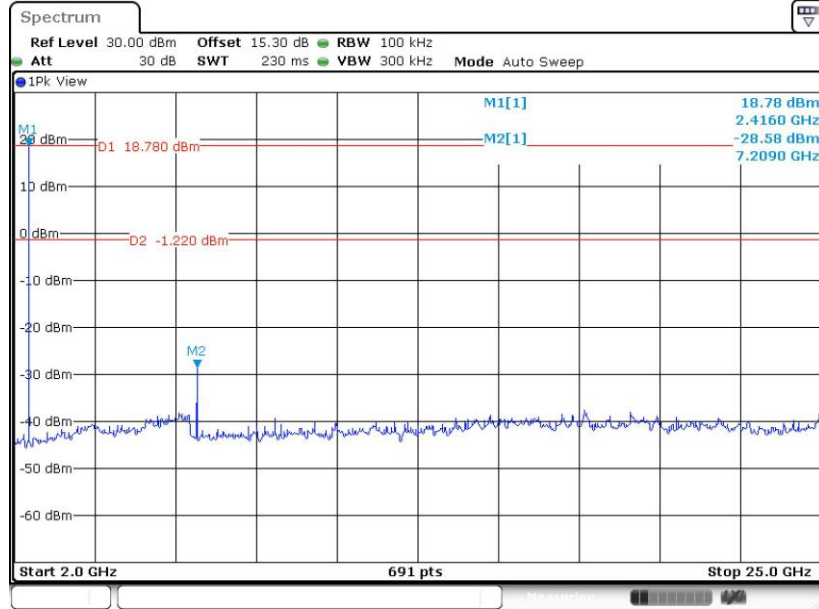

Date: 1.JUN.2024 10:40:24




CSE Plot on Ch 39

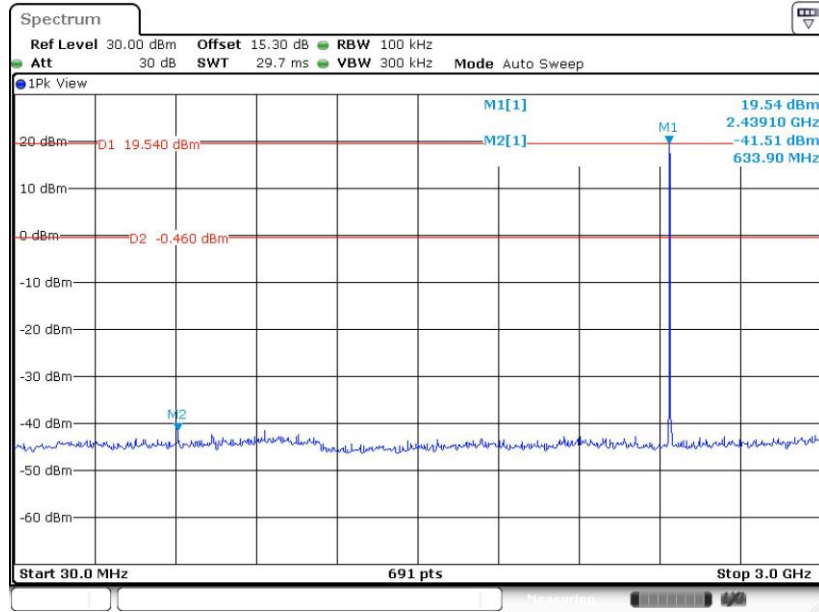

Date: 1.JUN.2024 10:45:46

CSE Plot on Ch 39

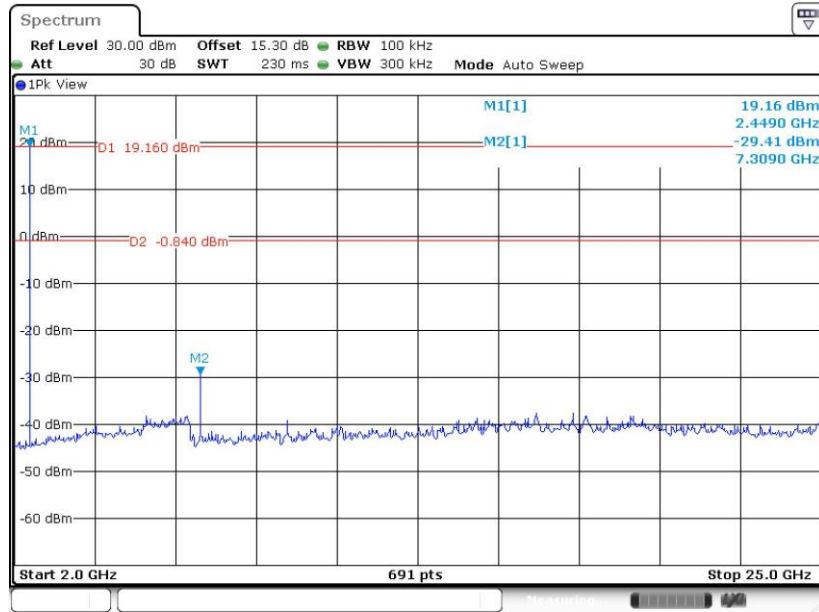


Date: 1.JUN.2024 10:46:16






CSE Plot on Ch 78

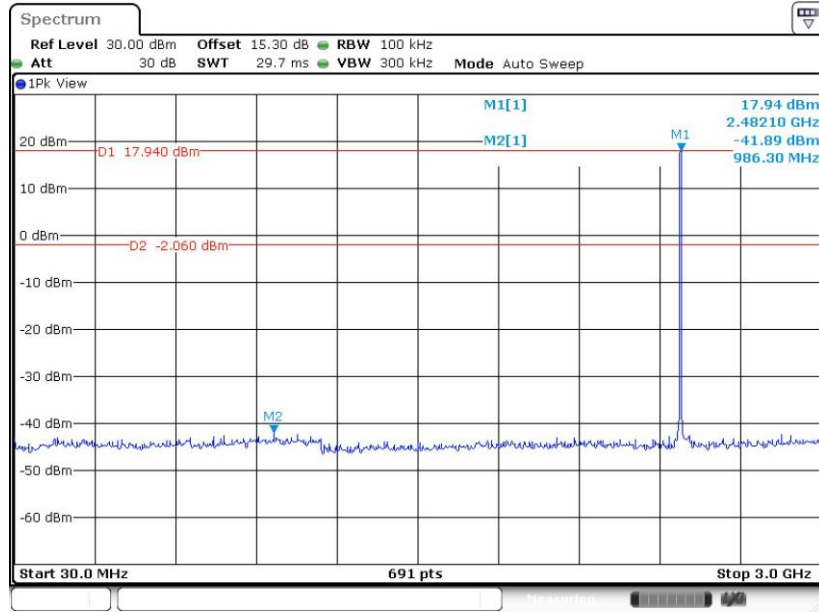

Date: 1.JUN.2024 10:52:28

CSE Plot on Ch 78

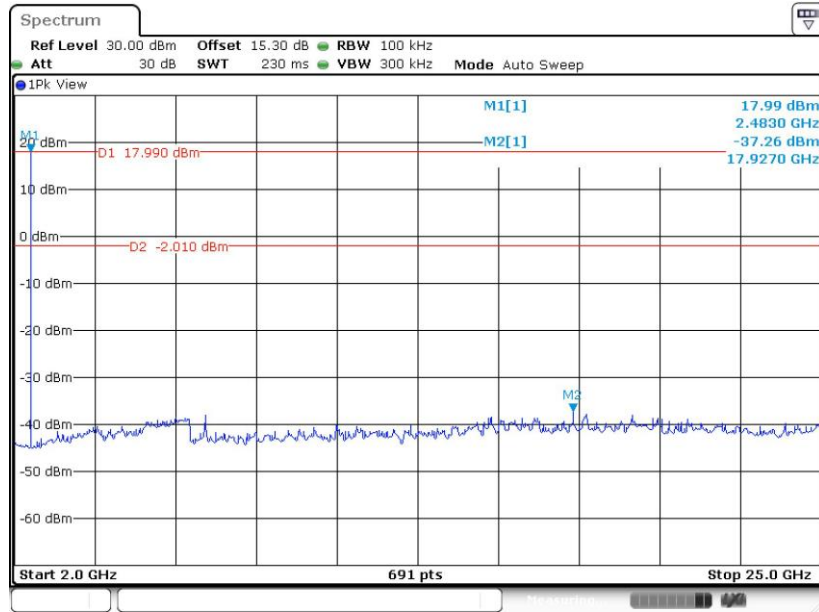


Date: 1.JUN.2024 10:52:55




<2Mbps>

CSE Plot on Ch 00

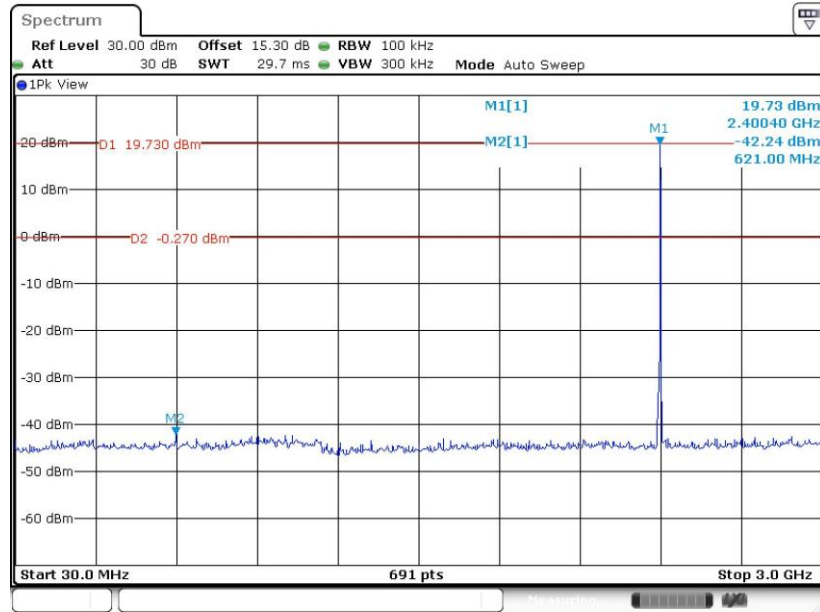

Date: 1.JUN.2024 11:03:21


CSE Plot on Ch 00

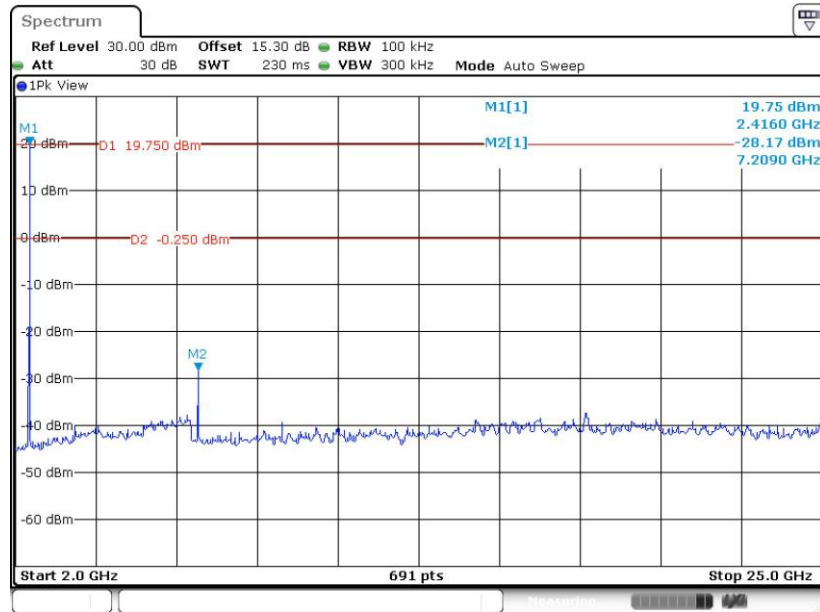

Date: 1.JUN.2024 11:04:12




CSE Plot on Ch 39

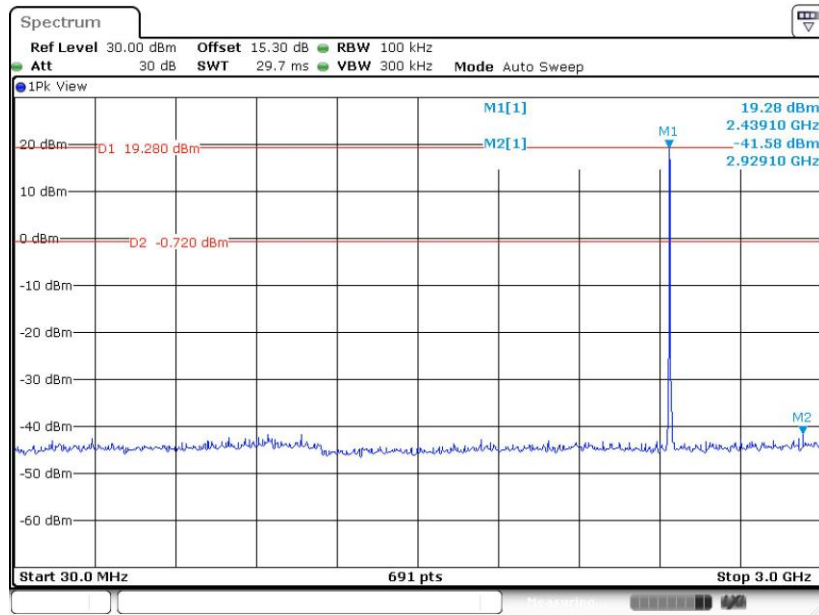

Date: 1.JUN.2024 11:08:41


CSE Plot on Ch 39

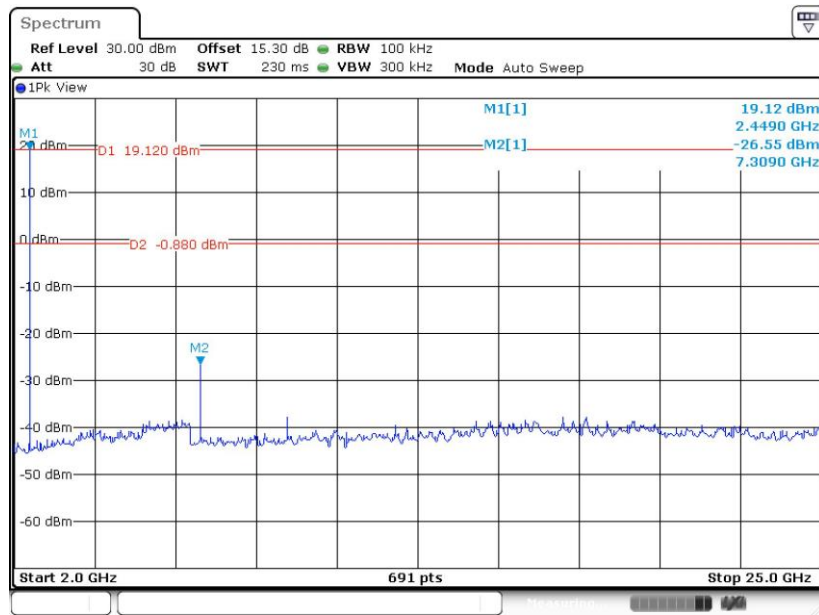

Date: 1.JUN.2024 11:09:12




CSE Plot on Ch 78

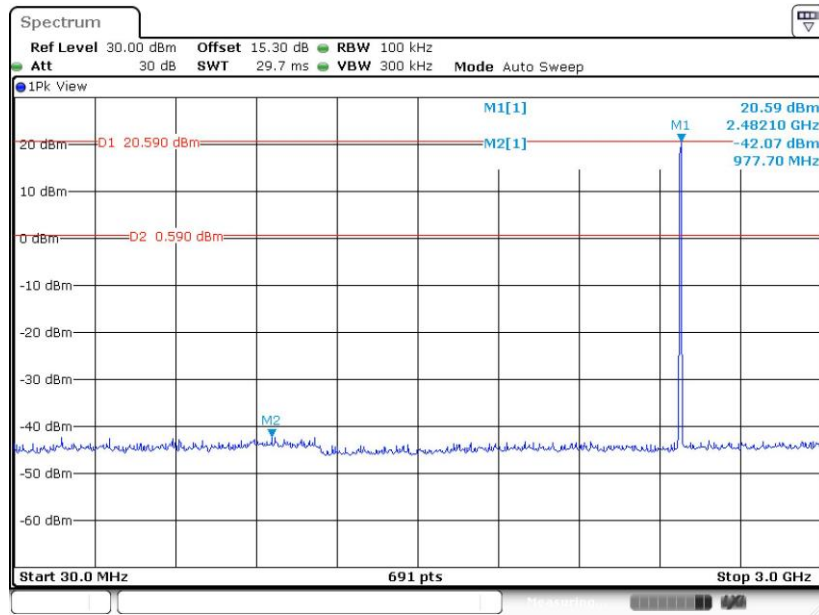

Date: 1.JUN.2024 11:15:30

CSE Plot on Ch 78

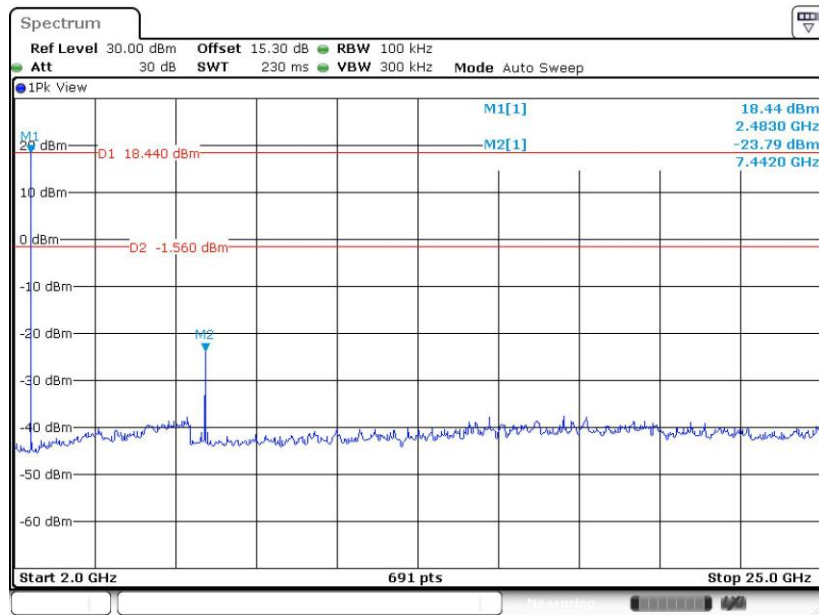


Date: 1.JUN.2024 11:16:30




<3Mbps>

CSE Plot on Ch 00

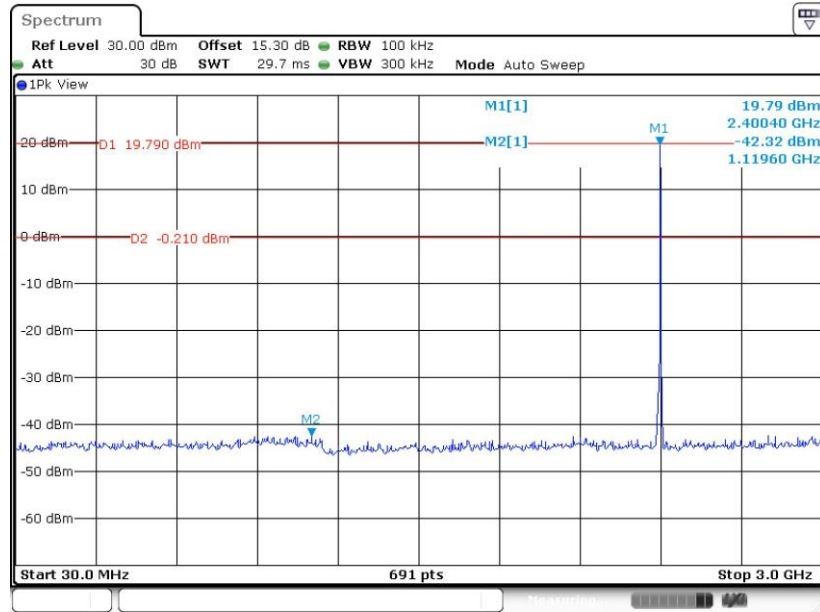

Date: 1.JUN.2024 11:25:27


CSE Plot on Ch 00

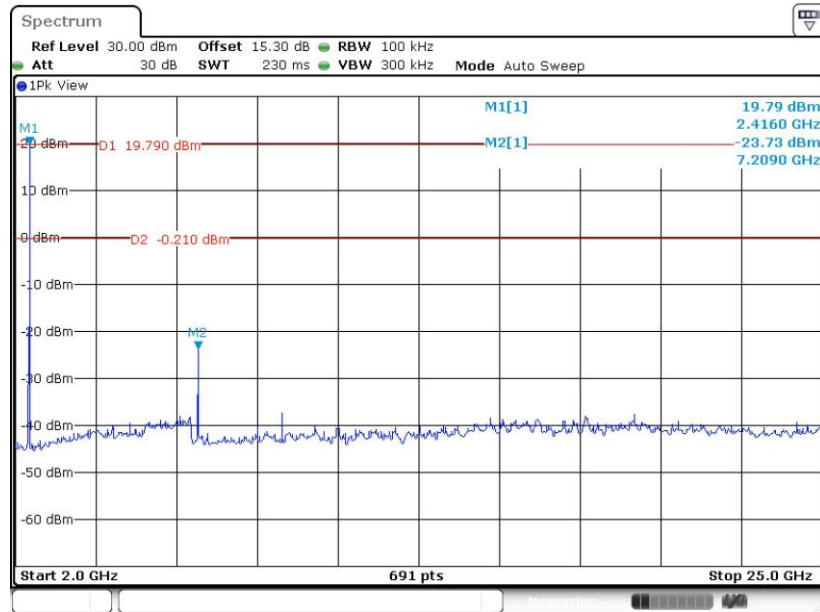

Date: 1.JUN.2024 11:25:55




CSE Plot on Ch 39

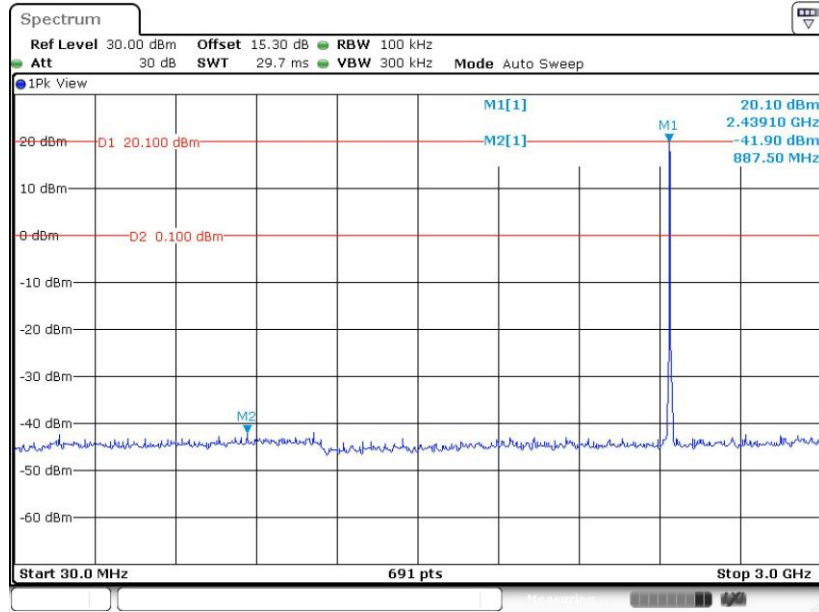

Date: 1.JUN.2024 11:35:51


CSE Plot on Ch 39

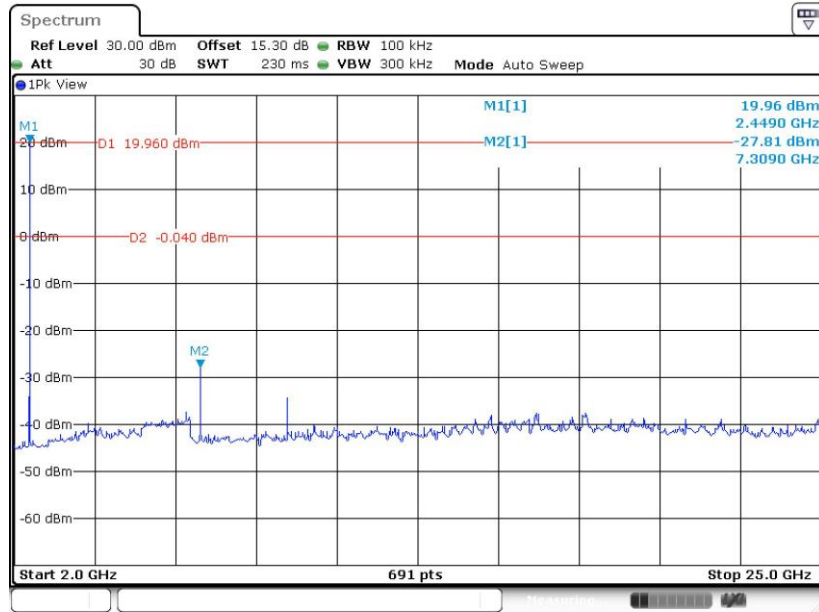

Date: 1.JUN.2024 11:36:20




CSE Plot on Ch 78

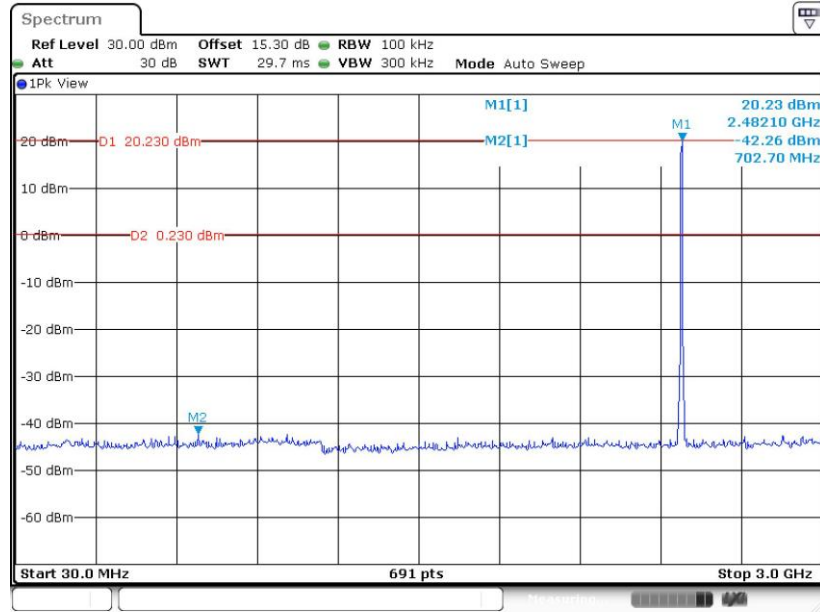

Date: 1.JUN.2024 11:41:11

CSE Plot on Ch 78

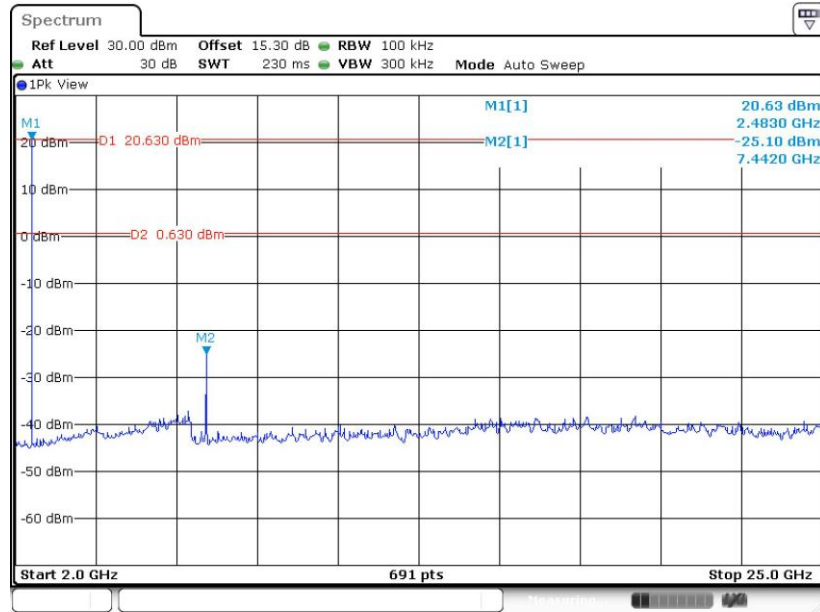


Date: 1.JUN.2024 11:41:40



Ant 1


<1Mbps>

CSE Plot on Ch 00

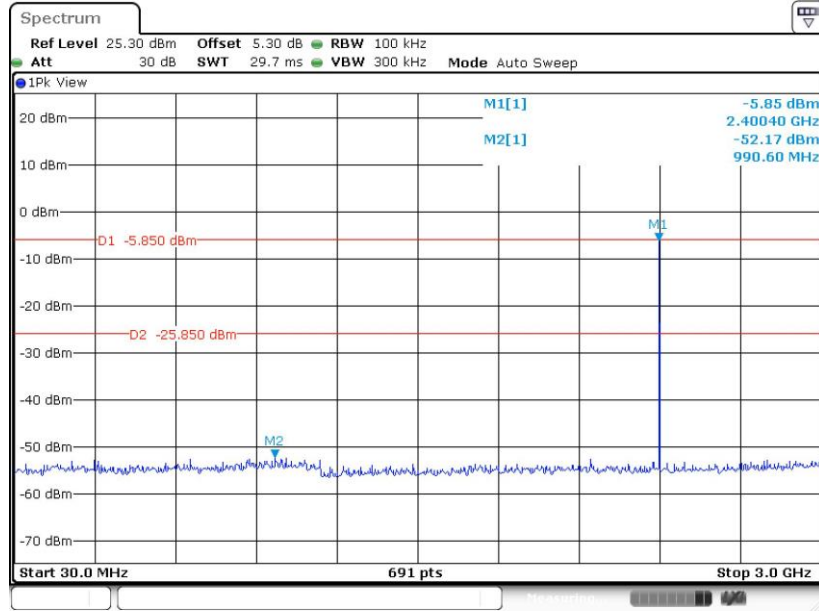

Date: 1.JUN.2024 12:15:06

CSE Plot on Ch 00

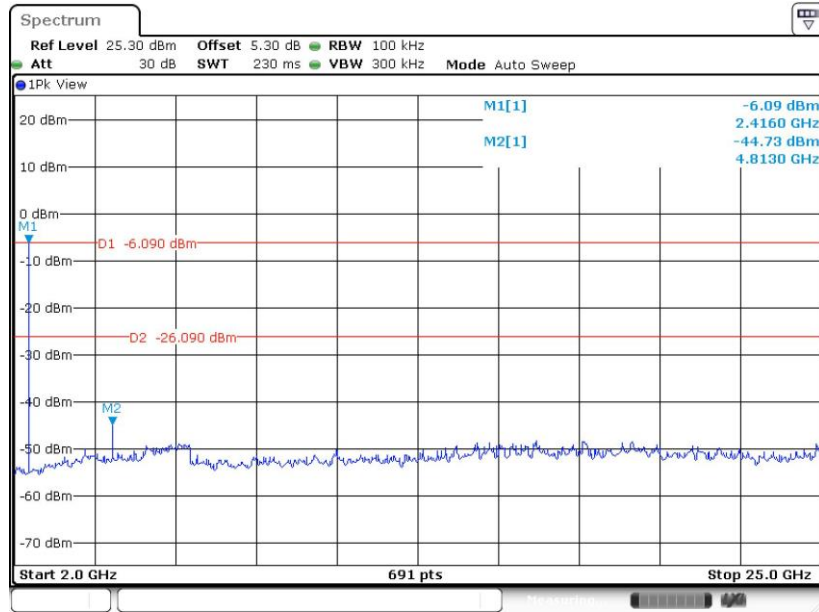


Date: 1.JUN.2024 12:15:47






CSE Plot on Ch 39

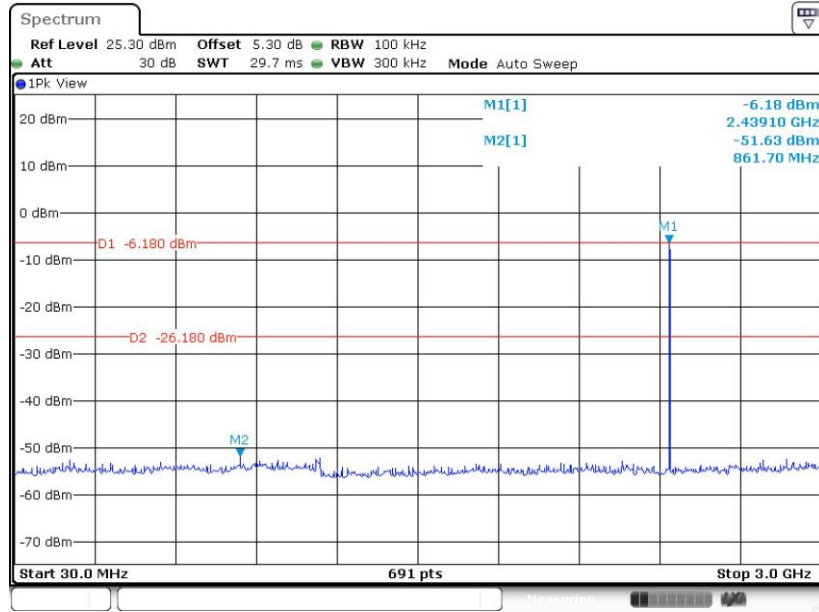

Date: 1.JUN.2024 13:51:03


CSE Plot on Ch 39

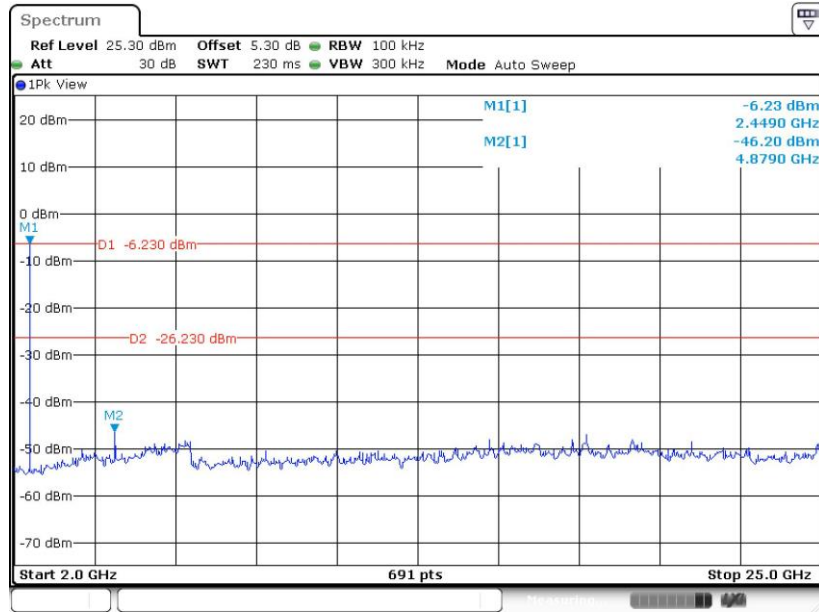

Date: 1.JUN.2024 14:17:18




CSE Plot on Ch 78

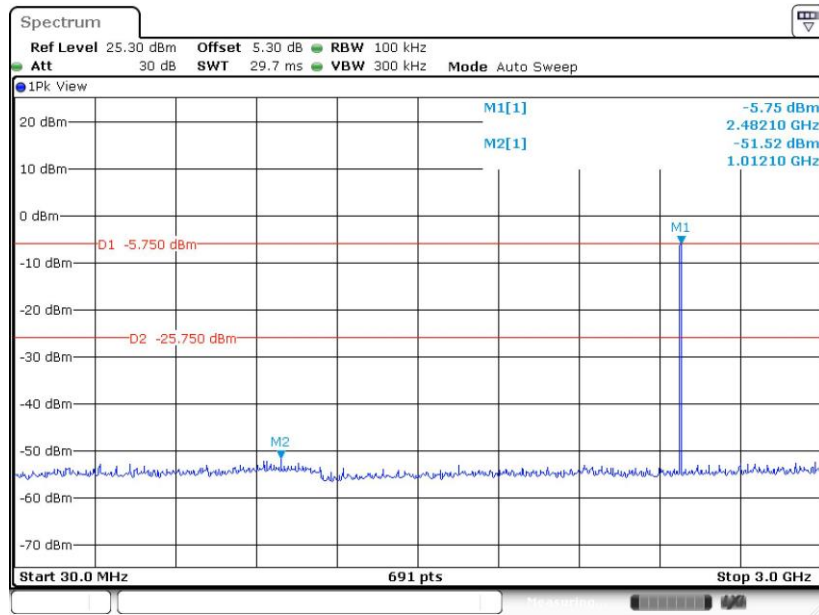

Date: 1.JUN.2024 14:20:49

CSE Plot on Ch 78

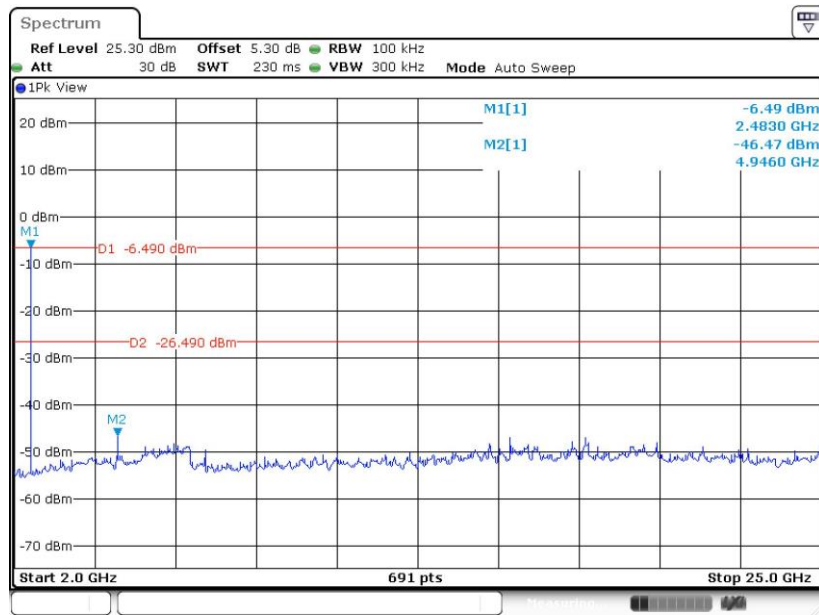


Date: 1.JUN.2024 14:21:17




<2Mbps>

CSE Plot on Ch 00

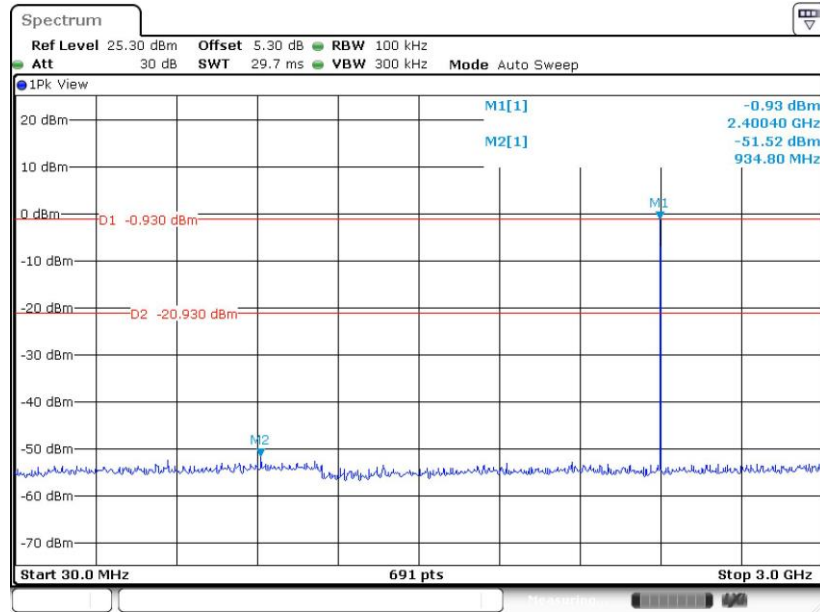

Date: 1.JUN.2024 14:26:01


CSE Plot on Ch 00

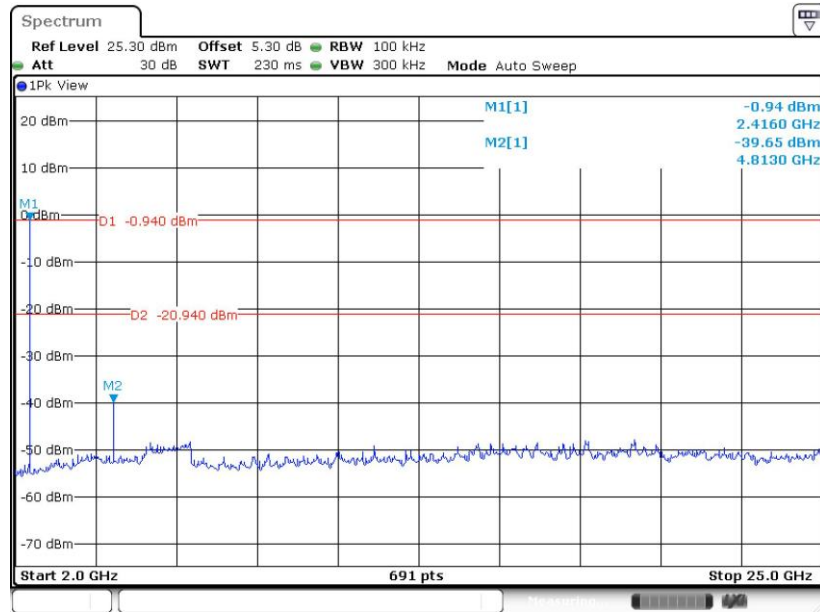

Date: 1.JUN.2024 14:26:32




CSE Plot on Ch 39

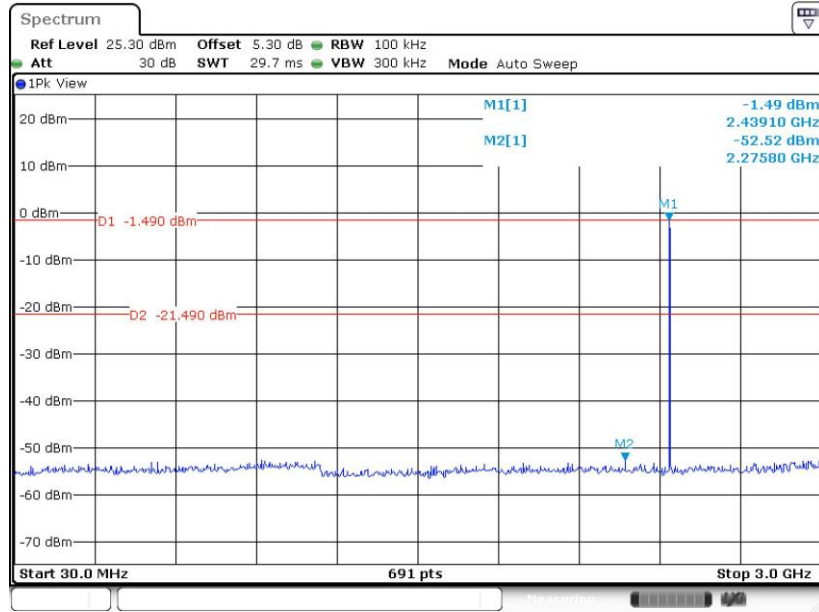

Date: 1.JUN.2024 14:36:12


CSE Plot on Ch 39

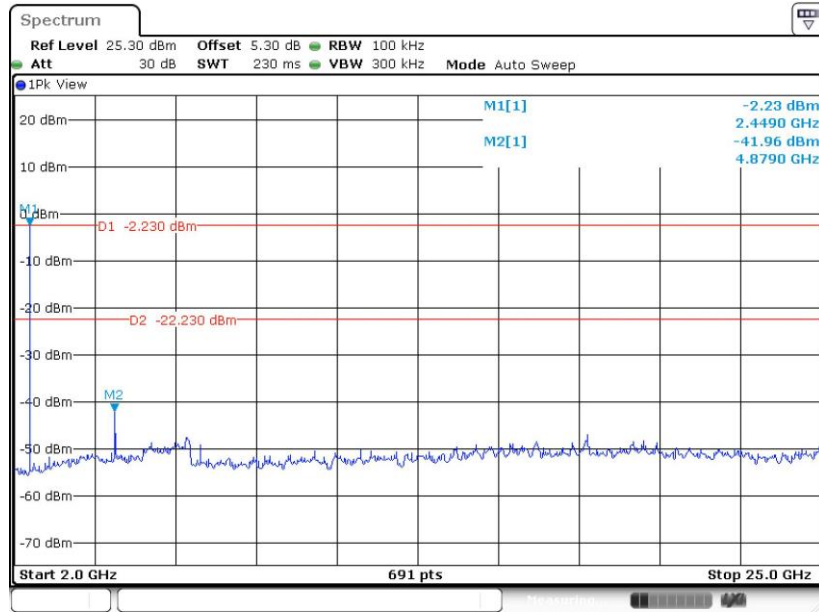

Date: 1.JUN.2024 14:36:42




### CSE Plot on Ch 78

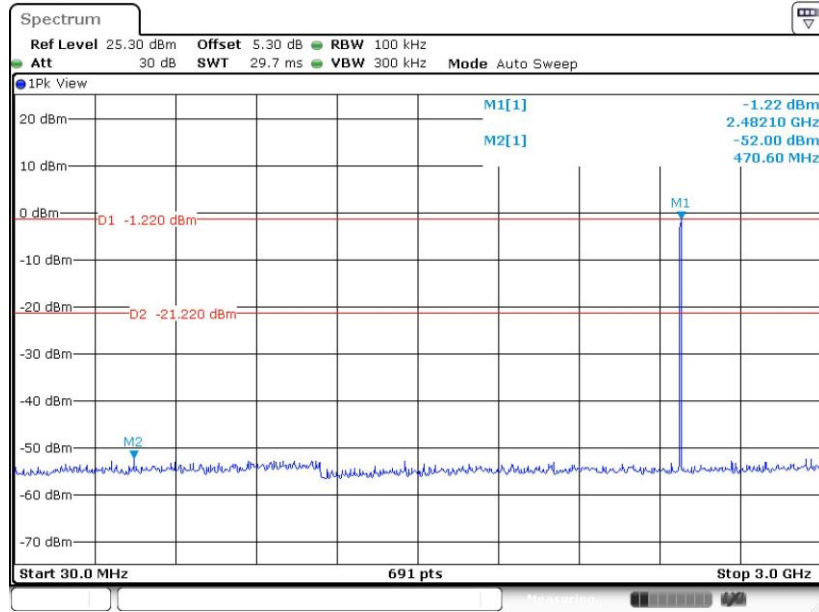

Date: 1.JUN.2024 14:42:00

### CSE Plot on Ch 78

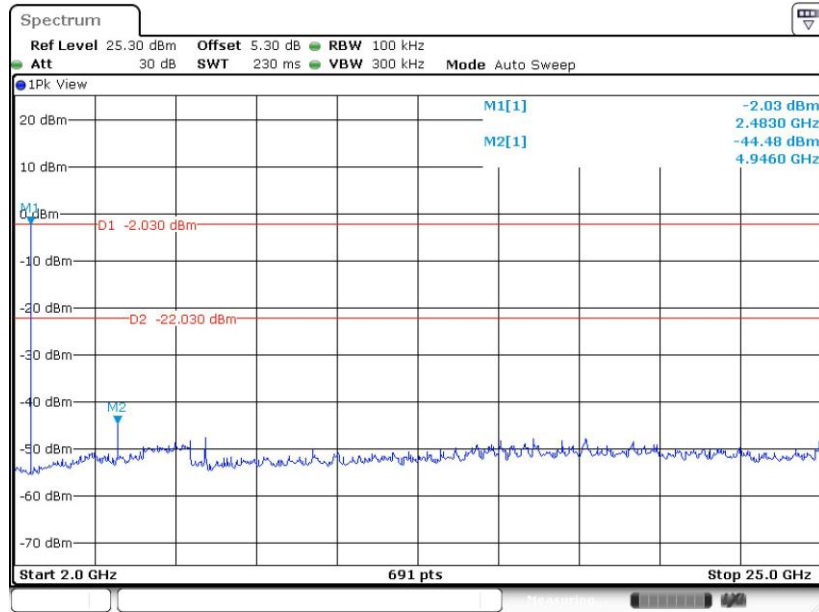


Date: 1.JUN.2024 14:42:29




<3Mbps>

CSE Plot on Ch 00

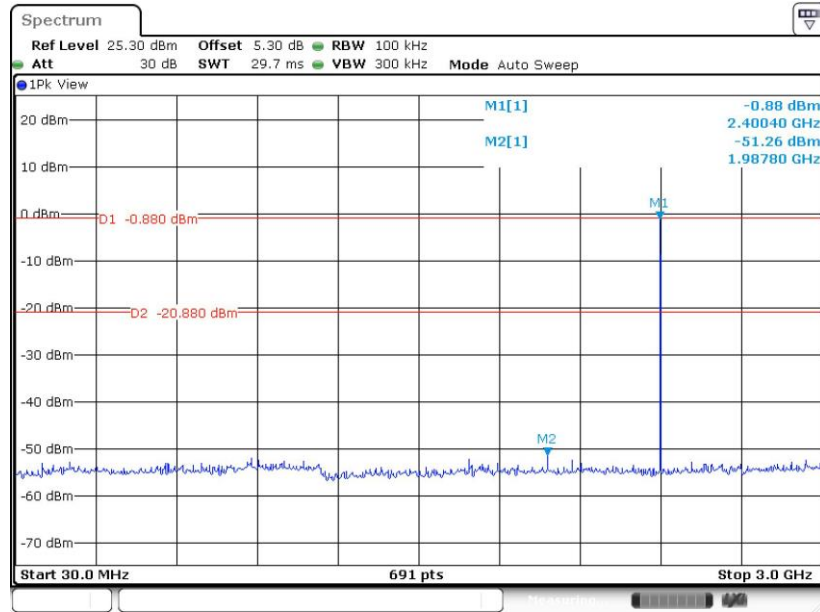

Date: 1.JUN.2024 14:47:26


CSE Plot on Ch 00

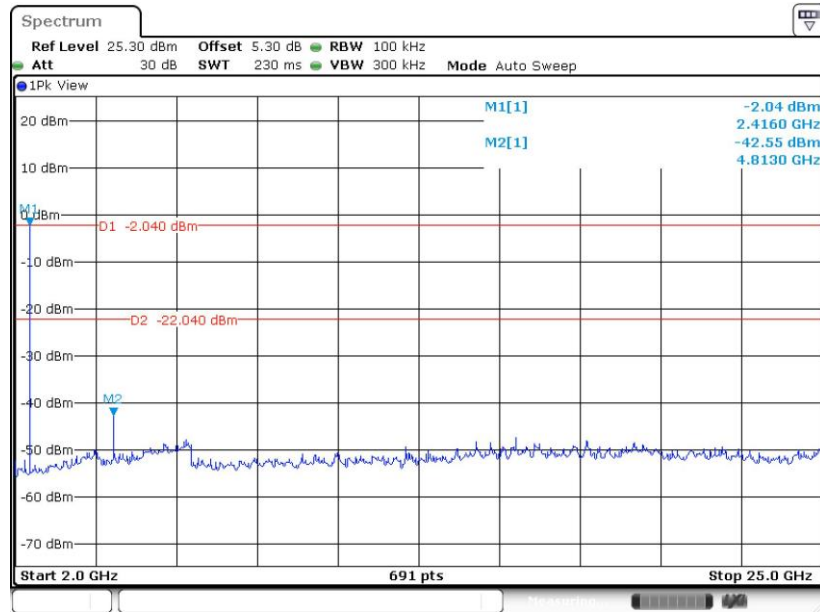

Date: 1.JUN.2024 14:47:56




CSE Plot on Ch 39

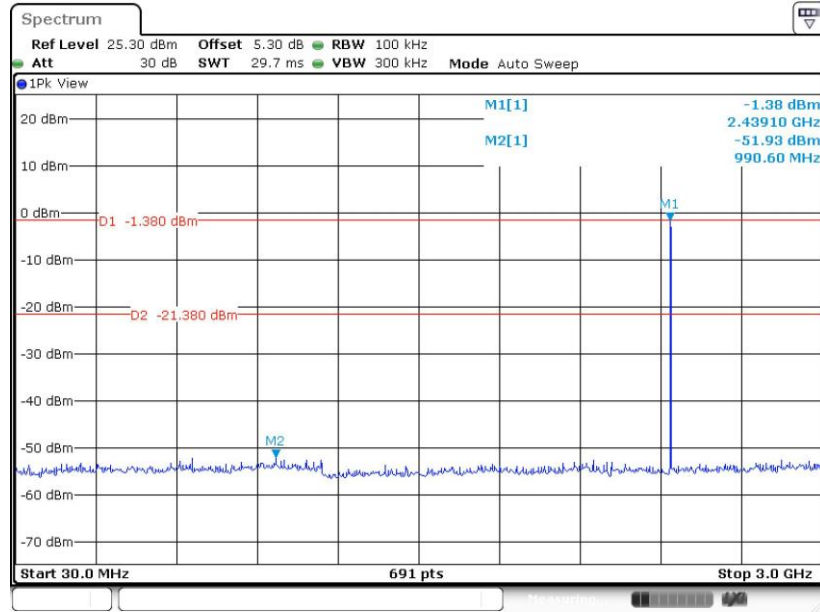

Date: 1.JUN.2024 14:52:40


CSE Plot on Ch 39

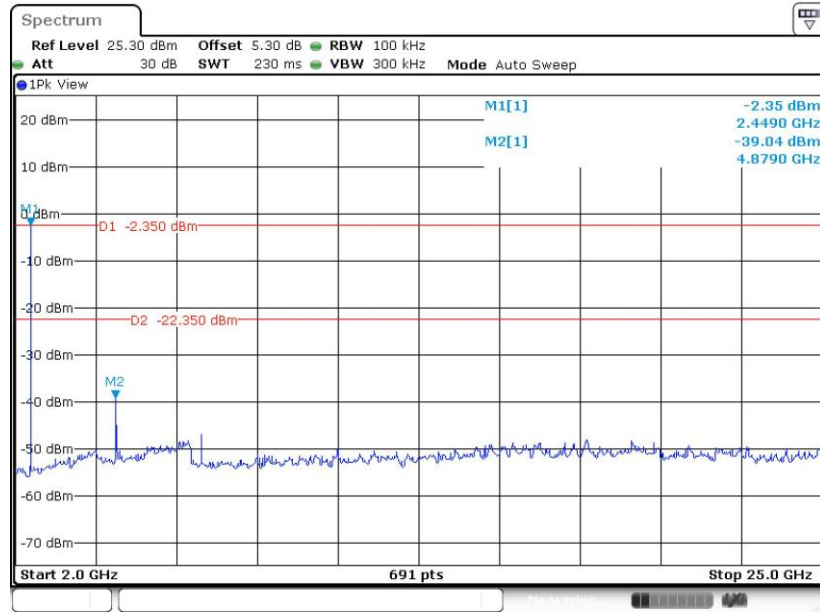

Date: 1.JUN.2024 14:53:20




CSE Plot on Ch 78

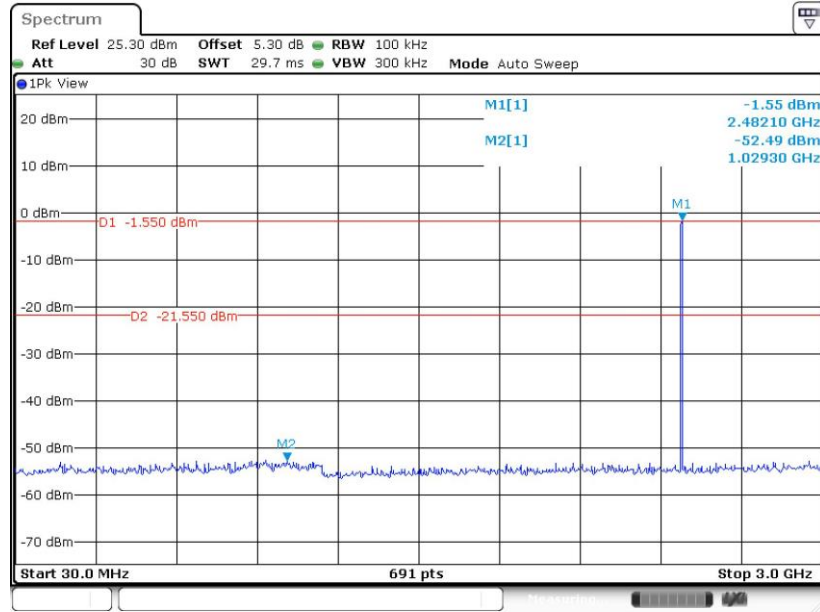

Date: 1.JUN.2024 14:56:45

CSE Plot on Ch 78

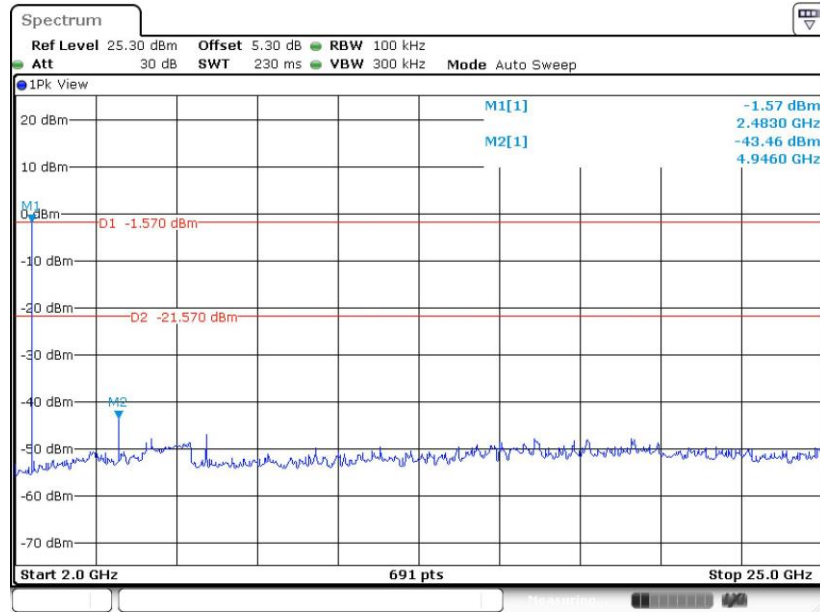

Date: 1.JUN.2024 14:57:15





### 3.8 Radiated Band Edges and Spurious Emission Measurement

#### 3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.8.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1 \text{ GHz}$ , RBW=1MHz for  $f > 1\text{GHz}$  ; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement: use duty cycle correction factor method per 15.35(c).  
Duty cycle = On time/100 milliseconds  
On time =  $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$   
Where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.  
Average Emission Level = Peak Emission Level +  $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (Ant 1:-30.81 dB / Ant2:-30.78) derived from  $20\log(\text{dwell time}/100\text{ms})$ . This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

### 3.8.4 Test Setup


For radiated emissions below 30MHz

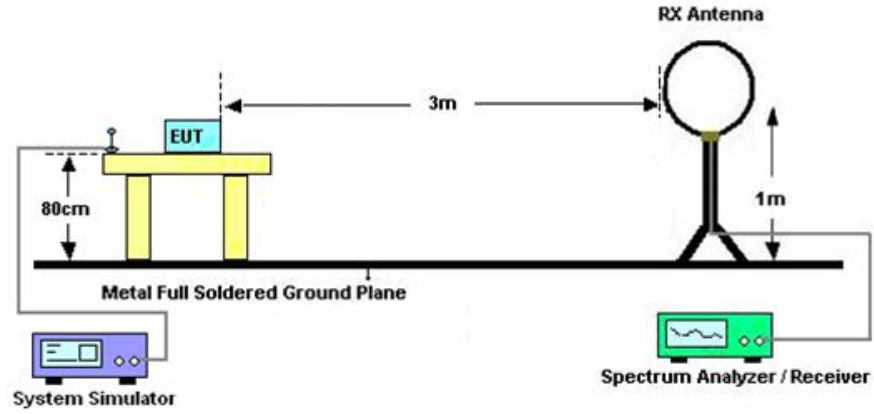

For radiated emissions from 30MHz to 1GHz

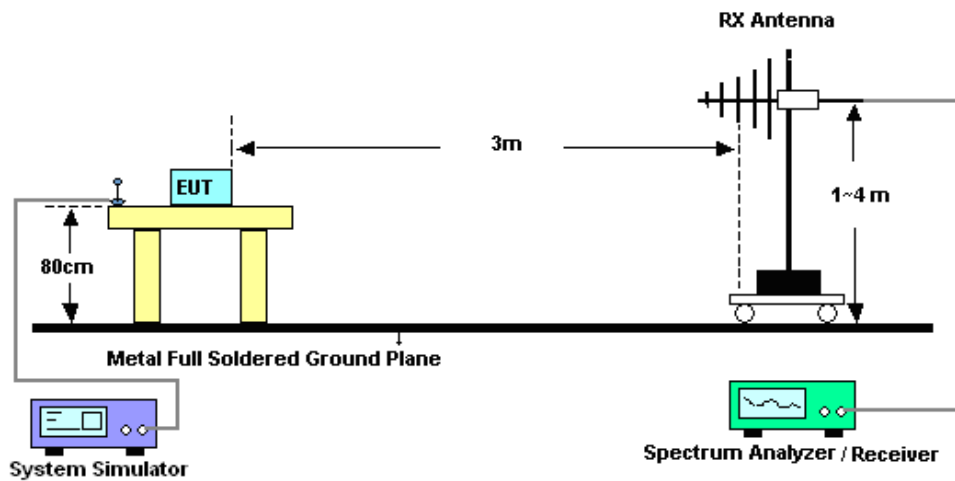

For radiated emissions above 1GHz

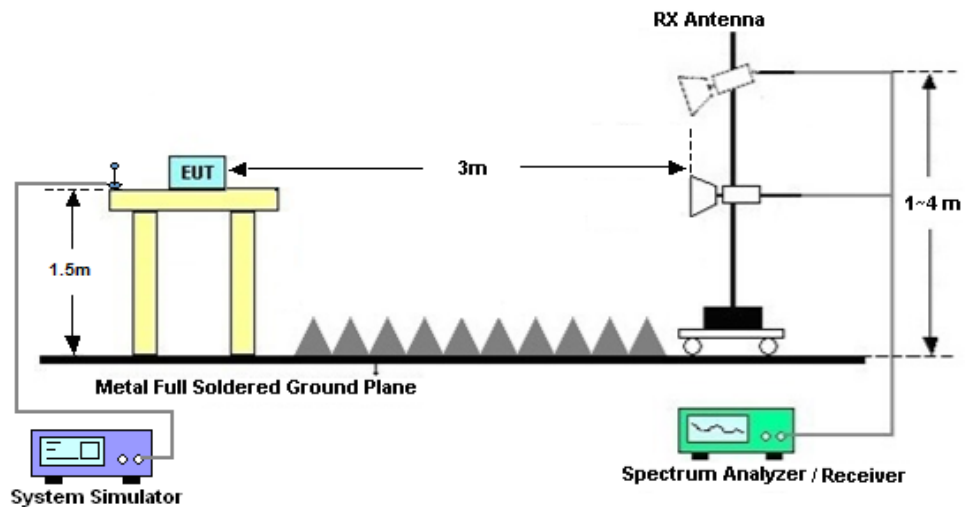



### **3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.8.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C.

### **3.8.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)**

Please refer to Appendix C.

### **3.8.8 Duty cycle correction factor for average measurement**

Please refer to Appendix D.



### 3.9 AC Conducted Emission Measurement

#### 3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.9.4 Test Setup

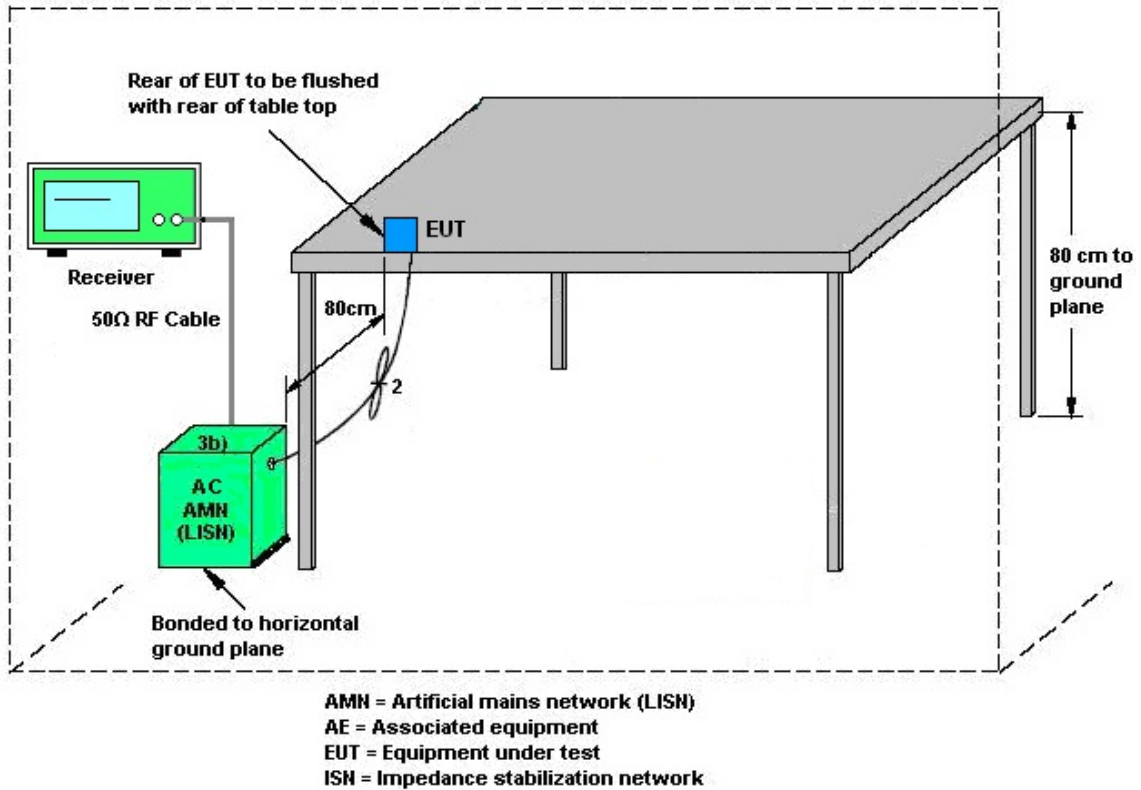

### 3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## 3.10 Antenna Requirements

### 3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### 3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

### 3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY564000 23	3Hz~8.5GHz;M ax 30dBm	Jan. 02, 2024	Jun. 10, 2024~ Jun. 18, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY602421 26	10Hz-44GHz	Oct. 11, 2023	Jun. 10, 2024~ Jun. 18, 2024	Oct. 10, 2024	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Jun. 10, 2024~ Jun. 18, 2024	Sep. 10, 2024	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	59915	30MHz-1GHz	Aug. 19, 2023	Jun. 10, 2024~ Jun. 18, 2024	Aug. 18, 2024	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 11, 2024	Jun. 10, 2024~ Jun. 18, 2024	Apr. 10, 2025	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 06, 2024	Jun. 10, 2024~ Jun. 18, 2024	Jan. 05, 2025	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	372171	9KHz ~1GHZ	Jan. 02, 2024	Jun. 10, 2024~ Jun. 18, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 02, 2024	Jun. 10, 2024~ Jun. 18, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2082395	1Ghz-18Ghz	Jan. 02, 2024	Jun. 10, 2024~ Jun. 18, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY532703 19	500MHz~26.5G Hz	Oct. 11, 2023	Jun. 10, 2024~ Jun. 18, 2024	Oct. 10, 2024	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Jun. 10, 2024~ Jun. 18, 2024	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jun. 10, 2024~ Jun. 18, 2024	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jun. 10, 2024~ Jun. 18, 2024	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr 18, 2024	Jun. 19, 2024	Apr 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Jun. 19, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr 18, 2024	Jun. 19, 2024	Apr 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Jun. 19, 2024	Oct. 10, 2024	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV30	101338	10Hz~30GHz	Jan. 05, 2024	Jun. 01, 2024	Jan. 04, 2025	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Jun. 01, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GH z	Jan. 02, 2024	Jun. 01, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Jun. 01, 2024	Jan. 01, 2025	Conducted (TH01-KS)

NCR: No Calibration Required





## 5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.04 ppm

### Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

### Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30 dB
---	---------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.06 dB
---	---------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.18 dB
---	---------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.38 dB
---	---------

----- THE END -----



## Appendix A. Conducted Test Results

**Bluetooth**

Test Engineer:	Jacob Zhang	Temperature:	20~26	°C
Test Date:	2024/6/1	Relative Humidity:	40~51	%

**BT2.0-Ant2****TEST RESULTS DATA****20dB and 99% Occupied Bandwidth and Hopping Channel Separation**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (KHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.947	0.871	1007.200	0.6310	Pass
DH	1Mbps	1	39	2441	0.949	0.868	1002.900	0.6329	Pass
DH	1Mbps	1	78	2480	0.949	0.686	1002.900	0.6329	Pass
2DH	2Mbps	1	0	2402	1.363	1.389	998.600	0.9088	Pass
2DH	2Mbps	1	39	2441	1.363	1.395	998.600	0.9088	Pass
2DH	2Mbps	1	78	2480	1.363	1.389	998.600	0.9088	Pass
3DH	3Mbps	1	0	2402	1.372	1.346	1002.900	0.9146	Pass
3DH	3Mbps	1	39	2441	1.372	1.352	1002.900	0.9146	Pass
3DH	3Mbps	1	78	2480	1.372	1.349	1002.900	0.9146	Pass

**TEST RESULTS DATA****Dwell Time**

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec) (MHz)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.90	0.31	0.4	Pass
AFH	20	53.33	2.90	0.15	0.4	Pass

**TEST RESULTS DATA****Peak Power Table**

DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result	power setting
DH1	0	1	18.53	20.97	Pass	-4
	39	1	<b>18.55</b>	20.97	Pass	-4
	78	1	18.52	20.97	Pass	-4
2DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result	power setting
2DH1	0	1	19.52	20.97	Pass	-4
	39	1	<b>19.87</b>	20.97	Pass	-4
	78	1	19.85	20.97	Pass	-4
3DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result	power setting
3DH1	0	1	19.65	20.97	Pass	-4
	39	1	<b>20.00</b>	20.97	Pass	-4
	78	1	19.98	20.97	Pass	-4

**TEST RESULTS DATA****Number of Hopping Frequency**

Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	79	> 15	Pass

**Bluetooth****BT2.0-Ant1****TEST RESULTS DATA****20dB and 99% Occupied Bandwidth and Hopping Channel Separation**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (KHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.952	0.874	998.600	0.6348	Pass
DH	1Mbps	1	39	2441	0.955	0.874	1007.200	0.6367	Pass
DH	1Mbps	1	78	2480	0.949	0.871	1002.900	0.6329	Pass
2DH	2Mbps	1	0	2402	1.316	1.192	998.600	0.8770	Pass
2DH	2Mbps	1	39	2441	1.333	1.192	994.200	0.8886	Pass
2DH	2Mbps	1	78	2480	1.333	1.192	994.200	0.8886	Pass
3DH	3Mbps	1	0	2402	1.263	1.172	998.600	0.8423	Pass
3DH	3Mbps	1	39	2441	1.281	1.172	963.800	0.8539	Pass
3DH	3Mbps	1	78	2480	1.285	1.172	1002.900	0.8567	Pass

**TEST RESULTS DATA****Dwell Time**

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec) (MHz)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.88	0.31	0.4	Pass
AFH	20	53.33	2.88	0.15	0.4	Pass

**TEST RESULTS DATA****Peak Power Table**

DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result	power setting
DH1	0	1	-5.32	20.97	Pass	4
	39	1	-6.16	20.97	Pass	4
	78	1	-6.13	20.97	Pass	4
2DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result	power setting
2DH1	0	1	-2.79	20.97	Pass	4
	39	1	-3.57	20.97	Pass	4
	78	1	-3.55	20.97	Pass	4
3DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result	power setting
3DH1	0	1	-2.29	20.97	Pass	4
	39	1	-3.01	20.97	Pass	4
	78	1	-3.03	20.97	Pass	4


**TEST RESULTS DATA****Number of Hopping Frequency**

Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	79	> 15	Pass



## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

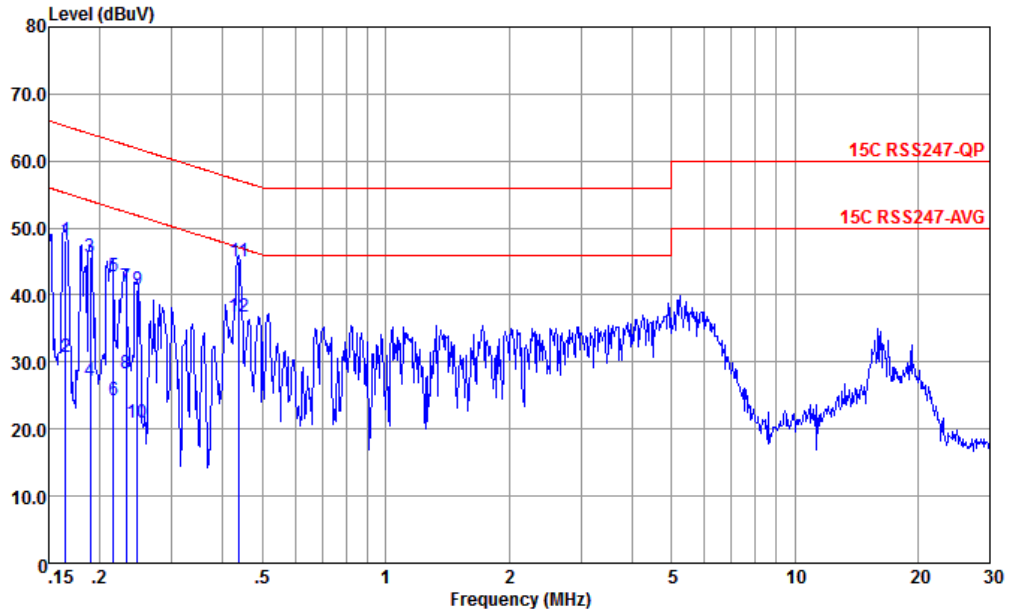


Site : CO01-KS  
 Condition : 15C RSS247-QP LISN-060105-L 2024 LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.165	48.02	-17.19	65.21	37.49	0.11	10.42	QP
2	0.165	30.82	-24.39	55.21	20.29	0.11	10.42	Average
3	0.189	45.60	-18.46	64.06	35.10	0.09	10.41	QP
4	0.189	27.10	-26.96	54.06	16.60	0.09	10.41	Average
5	0.216	42.78	-20.18	62.96	32.30	0.08	10.40	QP
6	0.216	24.38	-28.58	52.96	13.90	0.08	10.40	Average
7	0.232	41.27	-21.12	62.39	30.81	0.08	10.38	QP
8	0.232	28.27	-24.12	52.39	17.81	0.08	10.38	Average
9	0.247	40.76	-21.10	61.86	30.30	0.09	10.37	QP
10	0.247	20.96	-30.90	51.86	10.50	0.09	10.37	Average
11	0.437	45.00	-12.11	57.11	34.80	-0.06	10.26	QP
12 *	0.437	36.70	-10.41	47.11	26.50	-0.06	10.26	Average



Test Engineer :	Amos	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

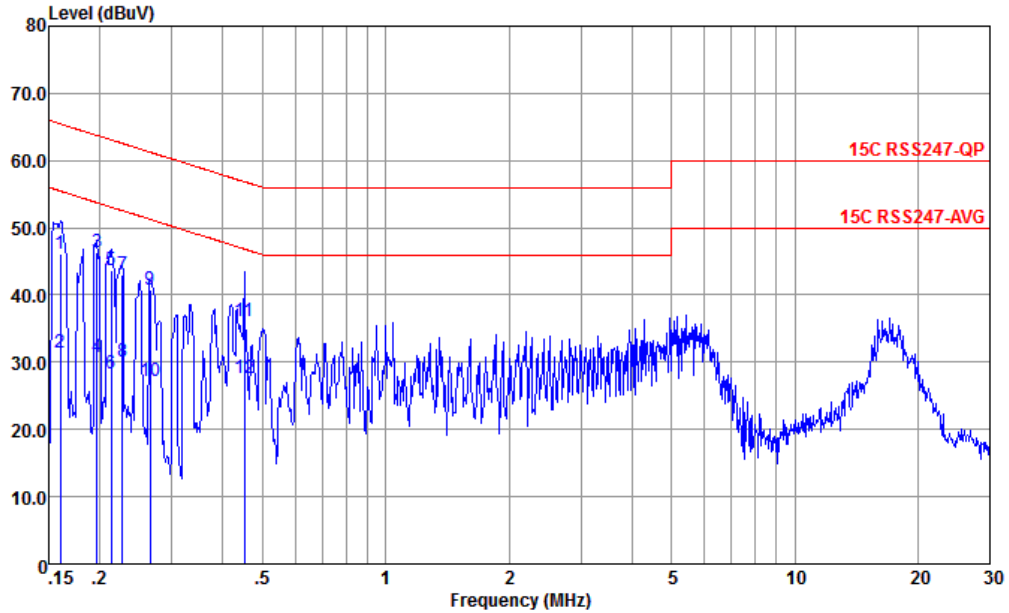

Site : CO01-KS  
 Condition : 15C RSS247-QP LISN-060105-N 2024 NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.160	46.14	-19.33	65.47	35.60	0.12	10.42	QP
2	0.160	31.44	-24.03	55.47	20.90	0.12	10.42	Average
3 *	0.197	46.34	-17.42	63.76	35.80	0.13	10.41	QP
4	0.197	30.74	-23.02	53.76	20.20	0.13	10.41	Average
5	0.213	43.79	-19.31	63.10	33.30	0.09	10.40	QP
6	0.213	28.39	-24.71	53.10	17.90	0.09	10.40	Average
7	0.227	43.04	-19.53	62.57	32.60	0.05	10.39	QP
8	0.227	30.07	-22.50	52.57	19.63	0.05	10.39	Average
9	0.266	40.81	-20.44	61.25	30.50	-0.05	10.36	QP
10	0.266	27.11	-24.14	51.25	16.80	-0.05	10.36	Average
11	0.452	36.00	-20.85	56.85	25.89	-0.14	10.25	QP
12	0.452	27.60	-19.25	46.85	17.49	-0.14	10.25	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



## Appendix C Radiated Spurious Emission Test Data

Test Engineer :	Jerry Xu	Relative Humidity :	41~42%
		Temperature :	22~23°C

### Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	Chip	Bluetooth BR_GFSK	0	2402	3Mbps	-	-
Mode 2	2400-2483.5	Chip	Bluetooth BR_GFSK	39	2441	3Mbps	-	-
Mode 3	2400-2483.5	Chip	Bluetooth BR_GFSK	78	2480	3Mbps	-	-
Mode 4	2400-2483.5	Printed	Bluetooth BR_GFSK	0	2402	3Mbps	-	-
Mode 5	2400-2483.5	Printed	Bluetooth BR_GFSK	39	2441	3Mbps	-	-
Mode 6	2400-2483.5	Printed	Bluetooth BR_GFSK	78	2480	3Mbps	-	-

### Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth BR_GFSK	0	2329.50	54.92	74.00	-19.08	V	PEAK	Pass	Band Edge
1	Bluetooth BR_GFSK	0	4804.00	46.78	74.00	-27.22	H	PEAK	Pass	Harmonic
2	Bluetooth BR_GFSK	39	2483.80	56.06	74.00	-17.94	H	PEAK	Pass	Band Edge
2	Bluetooth BR_GFSK	39	7323.00	49.63	74.00	-24.37	H	PEAK	Pass	Harmonic
3	Bluetooth BR_GFSK	78	2491.62	55.55	74.00	-18.45	H	PEAK	Pass	Band Edge
3	Bluetooth BR_GFSK	78	7440.00	50.69	74.00	-23.31	H	PEAK	Pass	Harmonic
4	Bluetooth BR_GFSK	0	2385.40	56.73	74.00	-17.27	H	PEAK	Pass	Band Edge
4	Bluetooth BR_GFSK	0	4804.00	64.34	74.00	-9.66	H	PEAK	Pass	Harmonic
5	Bluetooth BR_GFSK	39	2486.44	56.59	74.00	-17.41	H	PEAK	Pass	Band Edge
5	Bluetooth BR_GFSK	39	7323.00	72.49	74.00	-1.51	H	PEAK	Pass	Harmonic
6	Bluetooth BR_GFSK	78	2487.96	64.42	74.00	-9.58	H	PEAK	Pass	Band Edge
6	Bluetooth BR_GFSK	78	7440.00	71.93	74.00	-2.07	H	PEAK	Pass	Harmonic



Mode	1																																																																																																														
	Band Edge																																																																																																														
	2400-2483.5_Bluetooth BR_GFSK_CH0_2402MHz																																																																																																														
ANT	Chip																																																																																																														
Pol.	Horizontal	Fundamental																																																																																																													
Peak																																																																																																															
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.65</td> <td>54.82</td> <td>74.00</td> <td>-19.18</td> <td>41.94</td> <td>32.46</td> <td>6.60</td> <td>32.18</td> <td>6.00</td> <td>349 PEAK</td> </tr> <tr> <td>2</td> <td>2388.65</td> <td>24.01</td> <td>54.00</td> <td>-29.99</td> <td>11.13</td> <td>32.46</td> <td>6.60</td> <td>32.18</td> <td>6.00</td> <td>349 AVERAGE</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.65	54.82	74.00	-19.18	41.94	32.46	6.60	32.18	6.00	349 PEAK	2	2388.65	24.01	54.00	-29.99	11.13	32.46	6.60	32.18	6.00	349 AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>82.15</td> <td>-----</td> <td>-----</td> <td>69.12</td> <td>32.59</td> <td>6.62</td> <td>32.18</td> <td>6.00</td> <td>349 PEAK</td> </tr> <tr> <td>2</td> <td>2402.00</td> <td>51.34</td> <td>-----</td> <td>-----</td> <td>38.31</td> <td>32.59</td> <td>6.62</td> <td>32.18</td> <td>6.00</td> <td>349 AVERAGE</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	82.15	-----	-----	69.12	32.59	6.62	32.18	6.00	349 PEAK	2	2402.00	51.34	-----	-----	38.31	32.59	6.62	32.18	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2388.65	54.82	74.00	-19.18	41.94	32.46	6.60	32.18	6.00	349 PEAK																																																																																																					
2	2388.65	24.01	54.00	-29.99	11.13	32.46	6.60	32.18	6.00	349 AVERAGE																																																																																																					
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2402.00	82.15	-----	-----	69.12	32.59	6.62	32.18	6.00	349 PEAK																																																																																																					
2	2402.00	51.34	-----	-----	38.31	32.59	6.62	32.18	6.00	349 AVERAGE																																																																																																					





Mode	1																																																																																																														
	Band Edge																																																																																																														
	2400-2483.5_Bluetooth BR_GFSK_CH0_2402MHz																																																																																																														
ANT	Chip																																																																																																														
Pol.	Vertical	Fundamental																																																																																																													
Peak																																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2329.50</td> <td>54.92</td> <td>74.00</td> <td>-19.08</td> <td>42.81</td> <td>31.00</td> <td>6.51</td> <td>32.20</td> <td>6.00</td> <td>343</td> <td>122 PEAK</td> </tr> <tr> <td>2</td> <td>2329.50</td> <td>24.11</td> <td>54.00</td> <td>-29.89</td> <td>12.00</td> <td>31.00</td> <td>6.51</td> <td>32.20</td> <td>6.00</td> <td>343</td> <td>122 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2329.50	54.92	74.00	-19.08	42.81	31.00	6.51	32.20	6.00	343	122 PEAK	2	2329.50	24.11	54.00	-29.89	12.00	31.00	6.51	32.20	6.00	343	122 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>81.09</td> <td>-----</td> <td>-----</td> <td>68.06</td> <td>32.59</td> <td>6.62</td> <td>32.18</td> <td>6.00</td> <td>343</td> <td>122 PEAK</td> </tr> <tr> <td>2</td> <td>2402.00</td> <td>50.28</td> <td>-----</td> <td>-----</td> <td>37.25</td> <td>32.59</td> <td>6.62</td> <td>32.18</td> <td>6.00</td> <td>343</td> <td>122 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2402.00	81.09	-----	-----	68.06	32.59	6.62	32.18	6.00	343	122 PEAK	2	2402.00	50.28	-----	-----	37.25	32.59	6.62	32.18	6.00	343
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																					
1	2329.50	54.92	74.00	-19.08	42.81	31.00	6.51	32.20	6.00	343	122 PEAK																																																																																																				
2	2329.50	24.11	54.00	-29.89	12.00	31.00	6.51	32.20	6.00	343	122 AVERAGE																																																																																																				
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																					
1	2402.00	81.09	-----	-----	68.06	32.59	6.62	32.18	6.00	343	122 PEAK																																																																																																				
2	2402.00	50.28	-----	-----	37.25	32.59	6.62	32.18	6.00	343	122 AVERAGE																																																																																																				



Mode	1																																																																																							
	Harmonic																																																																																							
	2400-2483.5_Bluetooth BR_GFSK_CH0_2402MHz																																																																																							
ANT	Chip																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>46.78</td> <td>74.00</td> <td>-27.22</td> <td>64.42</td> <td>34.20</td> <td>9.44</td> <td>61.28</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4804.00	46.78	74.00	-27.22	64.42	34.20	9.44	61.28	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>42.78</td> <td>74.00</td> <td>-31.22</td> <td>60.42</td> <td>34.20</td> <td>9.44</td> <td>61.28</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4804.00	42.78	74.00	-31.22	60.42	34.20	9.44	61.28	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	4804.00	46.78	74.00	-27.22	64.42	34.20	9.44	61.28	0.00	---	---	PEAK																																																																												
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	4804.00	42.78	74.00	-31.22	60.42	34.20	9.44	61.28	0.00	---	---	PEAK																																																																												



Mode	2																																																																																																																			
	Band Edge - L																																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																			
ANT	Chip																																																																																																																			
Pol.	Horizontal	Fundamental																																																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2350.04</td> <td>55.14</td> <td>74.00</td> <td>-18.86</td> <td>42.80</td> <td>32.00</td> <td>6.54</td> <td>32.20</td> <td>6.00</td> <td>170</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2350.04</td> <td>24.33</td> <td>54.00</td> <td>-29.67</td> <td>11.99</td> <td>32.00</td> <td>6.54</td> <td>32.20</td> <td>6.00</td> <td>170</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2350.04	55.14	74.00	-18.86	42.80	32.00	6.54	32.20	6.00	170	360	PEAK	2	2350.04	24.33	54.00	-29.67	11.99	32.00	6.54	32.20	6.00	170	360	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2441.00</td> <td>84.63</td> <td>-----</td> <td>-----</td> <td>71.73</td> <td>32.43</td> <td>6.68</td> <td>32.21</td> <td>6.00</td> <td>170</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2441.00</td> <td>53.82</td> <td>-----</td> <td>-----</td> <td>40.92</td> <td>32.43</td> <td>6.68</td> <td>32.21</td> <td>6.00</td> <td>170</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2441.00	84.63	-----	-----	71.73	32.43	6.68	32.21	6.00	170	360	PEAK	2	2441.00	53.82	-----	-----	40.92	32.43	6.68	32.21	6.00	170	360	AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																										
1	2350.04	55.14	74.00	-18.86	42.80	32.00	6.54	32.20	6.00	170	360	PEAK																																																																																																								
2	2350.04	24.33	54.00	-29.67	11.99	32.00	6.54	32.20	6.00	170	360	AVERAGE																																																																																																								
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																										
1	2441.00	84.63	-----	-----	71.73	32.43	6.68	32.21	6.00	170	360	PEAK																																																																																																								
2	2441.00	53.82	-----	-----	40.92	32.43	6.68	32.21	6.00	170	360	AVERAGE																																																																																																								



Mode	2																																																										
	Band Edge - R																																																										
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																										
ANT	Chip																																																										
Pol.	Horizontal	Fundamental																																																									
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.80</td> <td>56.06</td> <td>74.00</td> <td>-17.94</td> <td>42.96</td> <td>32.60</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>170</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2483.80</td> <td>25.25</td> <td>54.00</td> <td>-28.75</td> <td>12.15</td> <td>32.60</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>170</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.80	56.06	74.00	-17.94	42.96	32.60	6.73	32.23	6.00	170	360	PEAK	2	2483.80	25.25	54.00	-28.75	12.15	32.60	6.73	32.23	6.00	170	360	AVERAGE	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Line	Limit	Level	Factor	Loss	Factor	Factor																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																	
1	2483.80	56.06	74.00	-17.94	42.96	32.60	6.73	32.23	6.00	170	360	PEAK																																															
2	2483.80	25.25	54.00	-28.75	12.15	32.60	6.73	32.23	6.00	170	360	AVERAGE																																															



Mode	2																																																																																																																		
	Band Edge - L																																																																																																																		
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																		
ANT	Chip																																																																																																																		
Pol.	Vertical	Fundamental																																																																																																																	
Peak																																																																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2341.72</td> <td>55.48</td> <td>74.00</td> <td>-18.52</td> <td>43.23</td> <td>31.92</td> <td>6.53</td> <td>32.20</td> <td>6.00</td> <td>300</td> <td>127</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2341.72</td> <td>24.67</td> <td>54.00</td> <td>-29.33</td> <td>12.42</td> <td>31.92</td> <td>6.53</td> <td>32.20</td> <td>6.00</td> <td>300</td> <td>127</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2341.72	55.48	74.00	-18.52	43.23	31.92	6.53	32.20	6.00	300	127	PEAK	2	2341.72	24.67	54.00	-29.33	12.42	31.92	6.53	32.20	6.00	300	127	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2441.00</td> <td>82.18</td> <td>-----</td> <td>-----</td> <td>69.28</td> <td>32.43</td> <td>6.68</td> <td>32.21</td> <td>6.00</td> <td>300</td> <td>127</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2441.00</td> <td>51.37</td> <td>-----</td> <td>-----</td> <td>38.47</td> <td>32.43</td> <td>6.68</td> <td>32.21</td> <td>6.00</td> <td>300</td> <td>127</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2441.00	82.18	-----	-----	69.28	32.43	6.68	32.21	6.00	300	127	PEAK	2	2441.00	51.37	-----	-----	38.47	32.43	6.68	32.21	6.00	300	127
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																									
1	2341.72	55.48	74.00	-18.52	43.23	31.92	6.53	32.20	6.00	300	127	PEAK																																																																																																							
2	2341.72	24.67	54.00	-29.33	12.42	31.92	6.53	32.20	6.00	300	127	AVERAGE																																																																																																							
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																									
1	2441.00	82.18	-----	-----	69.28	32.43	6.68	32.21	6.00	300	127	PEAK																																																																																																							
2	2441.00	51.37	-----	-----	38.47	32.43	6.68	32.21	6.00	300	127	AVERAGE																																																																																																							



Mode	2																																																						
	Band Edge - R																																																						
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																						
ANT	Chip																																																						
Pol.	Vertical	Fundamental																																																					
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2486.26</td> <td>55.19</td> <td>74.00</td> <td>-18.81</td> <td>42.07</td> <td>32.62</td> <td>6.74</td> <td>32.24</td> <td>6.00</td> <td>300</td> <td>127</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2486.26</td> <td>24.38</td> <td>54.00</td> <td>-29.62</td> <td>11.26</td> <td>32.62</td> <td>6.74</td> <td>32.24</td> <td>6.00</td> <td>300</td> <td>127</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2486.26	55.19	74.00	-18.81	42.07	32.62	6.74	32.24	6.00	300	127	PEAK	2	2486.26	24.38	54.00	-29.62	11.26	32.62	6.74	32.24	6.00	300	127	AVERAGE	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																															
1	2486.26	55.19	74.00	-18.81	42.07	32.62	6.74	32.24	6.00	300	127	PEAK																																											
2	2486.26	24.38	54.00	-29.62	11.26	32.62	6.74	32.24	6.00	300	127	AVERAGE																																											



Mode	2																																																																																																																											
	Harmonic																																																																																																																											
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																											
ANT	Chip																																																																																																																											
Pol.	Horizontal	Vertical																																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4882.00</td> <td>45.79</td> <td>74.00</td> <td>-28.21</td> <td>63.34</td> <td>34.14</td> <td>9.53</td> <td>61.22</td> <td>0.00</td> <td>---</td> <td>--- PEAK</td> </tr> <tr> <td>2</td> <td>7323.00</td> <td>49.63</td> <td>74.00</td> <td>-24.37</td> <td>62.99</td> <td>35.70</td> <td>11.69</td> <td>60.75</td> <td>0.00</td> <td>111</td> <td>0 PEAK</td> </tr> <tr> <td>3</td> <td>7323.00</td> <td>18.82</td> <td>54.00</td> <td>-35.18</td> <td>32.18</td> <td>35.70</td> <td>11.69</td> <td>60.75</td> <td>0.00</td> <td>111</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4882.00	45.79	74.00	-28.21	63.34	34.14	9.53	61.22	0.00	---	--- PEAK	2	7323.00	49.63	74.00	-24.37	62.99	35.70	11.69	60.75	0.00	111	0 PEAK	3	7323.00	18.82	54.00	-35.18	32.18	35.70	11.69	60.75	0.00	111	0 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4882.00</td> <td>40.91</td> <td>74.00</td> <td>-33.09</td> <td>58.46</td> <td>34.14</td> <td>9.53</td> <td>61.22</td> <td>0.00</td> <td>---</td> <td>--- PEAK</td> </tr> <tr> <td>2</td> <td>7323.00</td> <td>46.10</td> <td>74.00</td> <td>-27.90</td> <td>59.46</td> <td>35.70</td> <td>11.69</td> <td>60.75</td> <td>0.00</td> <td>---</td> <td>--- PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4882.00	40.91	74.00	-33.09	58.46	34.14	9.53	61.22	0.00	---	--- PEAK	2	7323.00	46.10	74.00	-27.90	59.46	35.70	11.69	60.75	0.00	---	--- PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																		
1	4882.00	45.79	74.00	-28.21	63.34	34.14	9.53	61.22	0.00	---	--- PEAK																																																																																																																	
2	7323.00	49.63	74.00	-24.37	62.99	35.70	11.69	60.75	0.00	111	0 PEAK																																																																																																																	
3	7323.00	18.82	54.00	-35.18	32.18	35.70	11.69	60.75	0.00	111	0 AVERAGE																																																																																																																	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																		
1	4882.00	40.91	74.00	-33.09	58.46	34.14	9.53	61.22	0.00	---	--- PEAK																																																																																																																	
2	7323.00	46.10	74.00	-27.90	59.46	35.70	11.69	60.75	0.00	---	--- PEAK																																																																																																																	



Mode	3																																																																																																																		
	Band Edge																																																																																																																		
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																		
ANT	Chip																																																																																																																		
Pol.	Horizontal	Fundamental																																																																																																																	
Peak																																																																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2491.62</td> <td>55.55</td> <td>74.00</td> <td>-18.45</td> <td>42.40</td> <td>32.65</td> <td>6.74</td> <td>32.24</td> <td>6.00</td> <td>315</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2491.62</td> <td>24.74</td> <td>54.00</td> <td>-29.26</td> <td>11.59</td> <td>32.65</td> <td>6.74</td> <td>32.24</td> <td>6.00</td> <td>315</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2491.62	55.55	74.00	-18.45	42.40	32.65	6.74	32.24	6.00	315	360	PEAK	2	2491.62	24.74	54.00	-29.26	11.59	32.65	6.74	32.24	6.00	315	360	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>85.46</td> <td>-----</td> <td>-----</td> <td>72.38</td> <td>32.58</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>315</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>54.65</td> <td>-----</td> <td>-----</td> <td>41.57</td> <td>32.58</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>315</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2480.00	85.46	-----	-----	72.38	32.58	6.73	32.23	6.00	315	360	PEAK	2	2480.00	54.65	-----	-----	41.57	32.58	6.73	32.23	6.00	315	360
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																									
1	2491.62	55.55	74.00	-18.45	42.40	32.65	6.74	32.24	6.00	315	360	PEAK																																																																																																							
2	2491.62	24.74	54.00	-29.26	11.59	32.65	6.74	32.24	6.00	315	360	AVERAGE																																																																																																							
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																									
1	2480.00	85.46	-----	-----	72.38	32.58	6.73	32.23	6.00	315	360	PEAK																																																																																																							
2	2480.00	54.65	-----	-----	41.57	32.58	6.73	32.23	6.00	315	360	AVERAGE																																																																																																							





Mode	3																																																																																																																		
	Band Edge																																																																																																																		
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																		
ANT	Chip																																																																																																																		
Pol.	Vertical	Fundamental																																																																																																																	
Peak																																																																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2489.85</td> <td>55.22</td> <td>74.00</td> <td>-18.78</td> <td>42.00</td> <td>32.64</td> <td>6.74</td> <td>32.24</td> <td>6.00</td> <td>150</td> <td>262</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2489.85</td> <td>24.41</td> <td>54.00</td> <td>-29.59</td> <td>11.27</td> <td>32.64</td> <td>6.74</td> <td>32.24</td> <td>6.00</td> <td>150</td> <td>262</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2489.85	55.22	74.00	-18.78	42.00	32.64	6.74	32.24	6.00	150	262	PEAK	2	2489.85	24.41	54.00	-29.59	11.27	32.64	6.74	32.24	6.00	150	262	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>80.87</td> <td>-----</td> <td>-----</td> <td>67.79</td> <td>32.58</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>150</td> <td>262</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>50.06</td> <td>-----</td> <td>-----</td> <td>36.98</td> <td>32.58</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>150</td> <td>262</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2480.00	80.87	-----	-----	67.79	32.58	6.73	32.23	6.00	150	262	PEAK	2	2480.00	50.06	-----	-----	36.98	32.58	6.73	32.23	6.00	150	262
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																									
1	2489.85	55.22	74.00	-18.78	42.00	32.64	6.74	32.24	6.00	150	262	PEAK																																																																																																							
2	2489.85	24.41	54.00	-29.59	11.27	32.64	6.74	32.24	6.00	150	262	AVERAGE																																																																																																							
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																									
1	2480.00	80.87	-----	-----	67.79	32.58	6.73	32.23	6.00	150	262	PEAK																																																																																																							
2	2480.00	50.06	-----	-----	36.98	32.58	6.73	32.23	6.00	150	262	AVERAGE																																																																																																							



Mode	3																																																																																																																																
	Harmonic																																																																																																																																
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																
ANT	Chip																																																																																																																																
Pol.	Horizontal	Vertical																																																																																																																															
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>44.49</td> <td>74.00</td> <td>-29.51</td> <td>62.04</td> <td>34.00</td> <td>9.61</td> <td>61.16</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>50.69</td> <td>74.00</td> <td>-23.31</td> <td>64.24</td> <td>35.70</td> <td>11.77</td> <td>61.02</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>7440.00</td> <td>19.88</td> <td>54.00</td> <td>-34.12</td> <td>33.43</td> <td>35.70</td> <td>11.77</td> <td>61.02</td> <td>0.00</td> <td>100</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	44.49	74.00	-29.51	62.04	34.00	9.61	61.16	0.00	---	---	PEAK	2	7440.00	50.69	74.00	-23.31	64.24	35.70	11.77	61.02	0.00	100	360	PEAK	3	7440.00	19.88	54.00	-34.12	33.43	35.70	11.77	61.02	0.00	100	360	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>42.19</td> <td>74.00</td> <td>-31.81</td> <td>59.74</td> <td>34.00</td> <td>9.61</td> <td>61.16</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>46.14</td> <td>74.00</td> <td>-27.86</td> <td>59.69</td> <td>35.70</td> <td>11.77</td> <td>61.02</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	42.19	74.00	-31.81	59.74	34.00	9.61	61.16	0.00	---	---	PEAK	2	7440.00	46.14	74.00	-27.86	59.69	35.70	11.77	61.02	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	4960.00	44.49	74.00	-29.51	62.04	34.00	9.61	61.16	0.00	---	---	PEAK																																																																																																																					
2	7440.00	50.69	74.00	-23.31	64.24	35.70	11.77	61.02	0.00	100	360	PEAK																																																																																																																					
3	7440.00	19.88	54.00	-34.12	33.43	35.70	11.77	61.02	0.00	100	360	AVERAGE																																																																																																																					
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	4960.00	42.19	74.00	-31.81	59.74	34.00	9.61	61.16	0.00	---	---	PEAK																																																																																																																					
2	7440.00	46.14	74.00	-27.86	59.69	35.70	11.77	61.02	0.00	---	---	PEAK																																																																																																																					



Mode	4																																																																																																															
	Band Edge																																																																																																															
	2400-2483.5_Bluetooth BR_GFSK_CH0_2402MHz																																																																																																															
ANT	Printed																																																																																																															
Pol.	Horizontal	Fundamental																																																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2385.40</td> <td>56.73</td> <td>74.00</td> <td>-17.27</td> <td>43.90</td> <td>32.42</td> <td>6.60</td> <td>32.19</td> <td>6.00</td> <td>123</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>2385.40</td> <td>25.95</td> <td>74.00</td> <td>-48.05</td> <td>13.12</td> <td>32.42</td> <td>6.60</td> <td>32.19</td> <td>6.00</td> <td>123</td> <td>0 Average</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2385.40	56.73	74.00	-17.27	43.90	32.42	6.60	32.19	6.00	123	0 PEAK	2	2385.40	25.95	74.00	-48.05	13.12	32.42	6.60	32.19	6.00	123	0 Average	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>113.83</td> <td>-----</td> <td>-----</td> <td>100.80</td> <td>32.59</td> <td>6.62</td> <td>32.18</td> <td>6.00</td> <td>123</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>2402.00</td> <td>83.05</td> <td>-----</td> <td>-----</td> <td>70.02</td> <td>32.59</td> <td>6.62</td> <td>32.18</td> <td>6.00</td> <td>123</td> <td>0 Average</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2402.00	113.83	-----	-----	100.80	32.59	6.62	32.18	6.00	123	0 PEAK	2	2402.00	83.05	-----	-----	70.02	32.59	6.62	32.18	6.00	123	0 Average
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	2385.40	56.73	74.00	-17.27	43.90	32.42	6.60	32.19	6.00	123	0 PEAK																																																																																																					
2	2385.40	25.95	74.00	-48.05	13.12	32.42	6.60	32.19	6.00	123	0 Average																																																																																																					
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	2402.00	113.83	-----	-----	100.80	32.59	6.62	32.18	6.00	123	0 PEAK																																																																																																					
2	2402.00	83.05	-----	-----	70.02	32.59	6.62	32.18	6.00	123	0 Average																																																																																																					



Mode	4																																																																																																											
	Band Edge																																																																																																											
	2400-2483.5_Bluetooth BR_GFSK_CH0_2402MHz																																																																																																											
ANT	Printed																																																																																																											
Pol.	Vertical	Fundamental																																																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2383.45</td> <td>55.81</td> <td>74.00</td> <td>-18.19</td> <td>43.01</td> <td>32.40</td> <td>6.59</td> <td>32.19</td> <td>6.00</td> <td>319</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2383.45</td> <td>25.03</td> <td>74.00</td> <td>-48.97</td> <td>12.23</td> <td>32.40</td> <td>6.59</td> <td>32.19</td> <td>6.00</td> <td>319</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2383.45	55.81	74.00	-18.19	43.01	32.40	6.59	32.19	6.00	319	360	PEAK	2	2383.45	25.03	74.00	-48.97	12.23	32.40	6.59	32.19	6.00	319	360	Average	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>113.64</td> <td>-----</td> <td>-----</td> <td>100.61</td> <td>32.59</td> <td>6.62</td> <td>32.18</td> <td>6.00</td> <td>319</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2402.00</td> <td>82.86</td> <td>-----</td> <td>-----</td> <td>69.83</td> <td>32.59</td> <td>6.62</td> <td>32.18</td> <td>6.00</td> <td>319</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2402.00	113.64	-----	-----	100.61	32.59	6.62	32.18	6.00	319	360	PEAK	2	2402.00	82.86	-----	-----	69.83	32.59	6.62	32.18	6.00	319	360	Average
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	2383.45	55.81	74.00	-18.19	43.01	32.40	6.59	32.19	6.00	319	360	PEAK																																																																																																
2	2383.45	25.03	74.00	-48.97	12.23	32.40	6.59	32.19	6.00	319	360	Average																																																																																																
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	2402.00	113.64	-----	-----	100.61	32.59	6.62	32.18	6.00	319	360	PEAK																																																																																																
2	2402.00	82.86	-----	-----	69.83	32.59	6.62	32.18	6.00	319	360	Average																																																																																																



Mode	4																																																																																																																																																																																																																																																																																										
	Harmonic																																																																																																																																																																																																																																																																																										
	2400-2483.5_Bluetooth BR_GFSK_CH0_2402MHz																																																																																																																																																																																																																																																																																										
ANT	Printed																																																																																																																																																																																																																																																																																										
Pol.	Horizontal	Vertical																																																																																																																																																																																																																																																																																									
Peak																																																																																																																																																																																																																																																																																											
Avg																																																																																																																																																																																																																																																																																											
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>4804.00</td><td>64.34</td><td>74.00</td><td>-9.66</td><td>81.98</td><td>34.20</td><td>9.44</td><td>61.28</td><td>0.00</td><td>112</td><td>204</td><td>PEAK</td></tr> <tr><td>2</td><td>4804.00</td><td>33.56</td><td>54.00</td><td>-20.44</td><td>51.20</td><td>34.20</td><td>9.44</td><td>61.28</td><td>0.00</td><td>112</td><td>204</td><td>AVERAGE</td></tr> <tr><td>3</td><td>7206.00</td><td>79.53</td><td>93.76</td><td>-14.23</td><td>92.77</td><td>35.60</td><td>11.65</td><td>60.49</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>9607.50</td><td>62.45</td><td>93.76</td><td>-31.31</td><td>73.16</td><td>36.90</td><td>13.56</td><td>61.17</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>12010.00</td><td>60.85</td><td>74.00</td><td>-13.15</td><td>60.19</td><td>38.71</td><td>15.28</td><td>61.33</td><td>0.00</td><td>249</td><td>142</td><td>PEAK</td></tr> <tr><td>6</td><td>12010.00</td><td>30.07</td><td>54.00</td><td>-23.93</td><td>37.41</td><td>38.71</td><td>15.28</td><td>61.33</td><td>0.00</td><td>249</td><td>142</td><td>AVERAGE</td></tr> <tr><td>7</td><td>14413.50</td><td>61.92</td><td>93.76</td><td>-31.84</td><td>69.05</td><td>39.23</td><td>16.81</td><td>63.17</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>8</td><td>16813.50</td><td>53.31</td><td>93.76</td><td>-40.45</td><td>56.89</td><td>41.37</td><td>18.13</td><td>63.08</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	64.34	74.00	-9.66	81.98	34.20	9.44	61.28	0.00	112	204	PEAK	2	4804.00	33.56	54.00	-20.44	51.20	34.20	9.44	61.28	0.00	112	204	AVERAGE	3	7206.00	79.53	93.76	-14.23	92.77	35.60	11.65	60.49	0.00	---	---	Peak	4	9607.50	62.45	93.76	-31.31	73.16	36.90	13.56	61.17	0.00	---	---	Peak	5	12010.00	60.85	74.00	-13.15	60.19	38.71	15.28	61.33	0.00	249	142	PEAK	6	12010.00	30.07	54.00	-23.93	37.41	38.71	15.28	61.33	0.00	249	142	AVERAGE	7	14413.50	61.92	93.76	-31.84	69.05	39.23	16.81	63.17	0.00	---	---	Peak	8	16813.50	53.31	93.76	-40.45	56.89	41.37	18.13	63.08	0.00	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>4804.00</td><td>61.81</td><td>74.00</td><td>-12.19</td><td>79.45</td><td>34.20</td><td>9.44</td><td>61.28</td><td>0.00</td><td>100</td><td>129</td><td>PEAK</td></tr> <tr><td>2</td><td>4804.00</td><td>31.03</td><td>54.00</td><td>-22.97</td><td>48.67</td><td>34.20</td><td>9.44</td><td>61.28</td><td>0.00</td><td>100</td><td>129</td><td>AVERAGE</td></tr> <tr><td>3</td><td>5983.50</td><td>49.06</td><td>92.52</td><td>-43.46</td><td>63.88</td><td>35.33</td><td>10.57</td><td>60.72</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>7206.00</td><td>76.46</td><td>92.52</td><td>-16.06</td><td>89.70</td><td>35.60</td><td>11.65</td><td>60.49</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>9609.00</td><td>63.38</td><td>92.52</td><td>-29.14</td><td>74.09</td><td>36.90</td><td>13.56</td><td>61.17</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>12010.00</td><td>56.95</td><td>74.00</td><td>-17.05</td><td>64.29</td><td>38.71</td><td>15.28</td><td>61.33</td><td>0.00</td><td>282</td><td>50</td><td>PEAK</td></tr> <tr><td>7</td><td>12010.00</td><td>26.17</td><td>54.00</td><td>-27.83</td><td>33.51</td><td>38.71</td><td>15.28</td><td>61.33</td><td>0.00</td><td>282</td><td>50</td><td>AVERAGE</td></tr> <tr><td>8</td><td>14413.50</td><td>58.63</td><td>92.52</td><td>-33.89</td><td>65.76</td><td>39.23</td><td>16.81</td><td>63.17</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>9</td><td>16813.50</td><td>49.59</td><td>92.52</td><td>-42.93</td><td>53.17</td><td>41.37</td><td>18.13</td><td>63.08</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	61.81	74.00	-12.19	79.45	34.20	9.44	61.28	0.00	100	129	PEAK	2	4804.00	31.03	54.00	-22.97	48.67	34.20	9.44	61.28	0.00	100	129	AVERAGE	3	5983.50	49.06	92.52	-43.46	63.88	35.33	10.57	60.72	0.00	---	---	Peak	4	7206.00	76.46	92.52	-16.06	89.70	35.60	11.65	60.49	0.00	---	---	Peak	5	9609.00	63.38	92.52	-29.14	74.09	36.90	13.56	61.17	0.00	---	---	Peak	6	12010.00	56.95	74.00	-17.05	64.29	38.71	15.28	61.33	0.00	282	50	PEAK	7	12010.00	26.17	54.00	-27.83	33.51	38.71	15.28	61.33	0.00	282	50	AVERAGE	8	14413.50	58.63	92.52	-33.89	65.76	39.23	16.81	63.17	0.00	---	---	Peak	9	16813.50	49.59	92.52	-42.93	53.17	41.37	18.13	63.08	0.00	---	---	Peak
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																																		
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																																																																																		
1	4804.00	64.34	74.00	-9.66	81.98	34.20	9.44	61.28	0.00	112	204	PEAK																																																																																																																																																																																																																																																																															
2	4804.00	33.56	54.00	-20.44	51.20	34.20	9.44	61.28	0.00	112	204	AVERAGE																																																																																																																																																																																																																																																																															
3	7206.00	79.53	93.76	-14.23	92.77	35.60	11.65	60.49	0.00	---	---	Peak																																																																																																																																																																																																																																																																															
4	9607.50	62.45	93.76	-31.31	73.16	36.90	13.56	61.17	0.00	---	---	Peak																																																																																																																																																																																																																																																																															
5	12010.00	60.85	74.00	-13.15	60.19	38.71	15.28	61.33	0.00	249	142	PEAK																																																																																																																																																																																																																																																																															
6	12010.00	30.07	54.00	-23.93	37.41	38.71	15.28	61.33	0.00	249	142	AVERAGE																																																																																																																																																																																																																																																																															
7	14413.50	61.92	93.76	-31.84	69.05	39.23	16.81	63.17	0.00	---	---	Peak																																																																																																																																																																																																																																																																															
8	16813.50	53.31	93.76	-40.45	56.89	41.37	18.13	63.08	0.00	---	---	Peak																																																																																																																																																																																																																																																																															
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																																		
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																																																																																		
1	4804.00	61.81	74.00	-12.19	79.45	34.20	9.44	61.28	0.00	100	129	PEAK																																																																																																																																																																																																																																																																															
2	4804.00	31.03	54.00	-22.97	48.67	34.20	9.44	61.28	0.00	100	129	AVERAGE																																																																																																																																																																																																																																																																															
3	5983.50	49.06	92.52	-43.46	63.88	35.33	10.57	60.72	0.00	---	---	Peak																																																																																																																																																																																																																																																																															
4	7206.00	76.46	92.52	-16.06	89.70	35.60	11.65	60.49	0.00	---	---	Peak																																																																																																																																																																																																																																																																															
5	9609.00	63.38	92.52	-29.14	74.09	36.90	13.56	61.17	0.00	---	---	Peak																																																																																																																																																																																																																																																																															
6	12010.00	56.95	74.00	-17.05	64.29	38.71	15.28	61.33	0.00	282	50	PEAK																																																																																																																																																																																																																																																																															
7	12010.00	26.17	54.00	-27.83	33.51	38.71	15.28	61.33	0.00	282	50	AVERAGE																																																																																																																																																																																																																																																																															
8	14413.50	58.63	92.52	-33.89	65.76	39.23	16.81	63.17	0.00	---	---	Peak																																																																																																																																																																																																																																																																															
9	16813.50	49.59	92.52	-42.93	53.17	41.37	18.13	63.08	0.00	---	---	Peak																																																																																																																																																																																																																																																																															



Mode	5																																																																																																													
	Band Edge - L																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																													
ANT	Printed																																																																																																													
Pol.	Horizontal	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2360.70</td> <td>55.16</td> <td>74.00</td> <td>-18.84</td> <td>42.66</td> <td>32.13</td> <td>6.56</td> <td>32.19</td> <td>6.00</td> <td>124</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>2360.70</td> <td>24.38</td> <td>54.00</td> <td>-29.62</td> <td>11.88</td> <td>32.13</td> <td>6.56</td> <td>32.19</td> <td>6.00</td> <td>124</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2360.70	55.16	74.00	-18.84	42.66	32.13	6.56	32.19	6.00	124	0 PEAK	2	2360.70	24.38	54.00	-29.62	11.88	32.13	6.56	32.19	6.00	124	0 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2441.00</td> <td>113.14</td> <td>74.00</td> <td>39.14</td> <td>100.24</td> <td>32.43</td> <td>6.68</td> <td>32.21</td> <td>6.00</td> <td>124</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>2441.00</td> <td>82.36</td> <td>54.00</td> <td>28.36</td> <td>69.46</td> <td>32.43</td> <td>6.68</td> <td>32.21</td> <td>6.00</td> <td>124</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2441.00	113.14	74.00	39.14	100.24	32.43	6.68	32.21	6.00	124	0 PEAK	2	2441.00	82.36	54.00	28.36	69.46	32.43	6.68	32.21	6.00	124	0 AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																				
1	2360.70	55.16	74.00	-18.84	42.66	32.13	6.56	32.19	6.00	124	0 PEAK																																																																																																			
2	2360.70	24.38	54.00	-29.62	11.88	32.13	6.56	32.19	6.00	124	0 AVERAGE																																																																																																			
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																				
1	2441.00	113.14	74.00	39.14	100.24	32.43	6.68	32.21	6.00	124	0 PEAK																																																																																																			
2	2441.00	82.36	54.00	28.36	69.46	32.43	6.68	32.21	6.00	124	0 AVERAGE																																																																																																			



Mode	5																																																								
	Band Edge - R																																																								
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																								
ANT	Printed																																																								
Pol.	Horizontal	Fundamental																																																							
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2486.44</td> <td>56.59</td> <td>74.00</td> <td>-17.41</td> <td>43.47</td> <td>32.62</td> <td>6.74</td> <td>32.24</td> <td>6.00</td> <td>124</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>2486.44</td> <td>25.81</td> <td>54.00</td> <td>-28.19</td> <td>12.69</td> <td>32.62</td> <td>6.74</td> <td>32.24</td> <td>6.00</td> <td>124</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2486.44	56.59	74.00	-17.41	43.47	32.62	6.74	32.24	6.00	124	0 PEAK	2	2486.44	25.81	54.00	-28.19	12.69	32.62	6.74	32.24	6.00	124	0 AVERAGE	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																															
1	2486.44	56.59	74.00	-17.41	43.47	32.62	6.74	32.24	6.00	124	0 PEAK																																														
2	2486.44	25.81	54.00	-28.19	12.69	32.62	6.74	32.24	6.00	124	0 AVERAGE																																														



Mode	5																																																																																																											
	Band Edge - L																																																																																																											
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																											
ANT	Printed																																																																																																											
Pol.	Vertical	Fundamental																																																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2304.23</td> <td>55.36</td> <td>74.00</td> <td>-18.64</td> <td>42.55</td> <td>32.41</td> <td>6.59</td> <td>32.19</td> <td>6.00</td> <td>303</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2304.23</td> <td>24.58</td> <td>54.00</td> <td>-29.42</td> <td>11.77</td> <td>32.41</td> <td>6.59</td> <td>32.19</td> <td>6.00</td> <td>303</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2304.23	55.36	74.00	-18.64	42.55	32.41	6.59	32.19	6.00	303	360	PEAK	2	2304.23	24.58	54.00	-29.42	11.77	32.41	6.59	32.19	6.00	303	360	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2441.00</td> <td>112.46</td> <td>-----</td> <td>-----</td> <td>99.56</td> <td>32.43</td> <td>6.68</td> <td>32.21</td> <td>6.00</td> <td>303</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2441.00</td> <td>81.68</td> <td>-----</td> <td>-----</td> <td>68.78</td> <td>32.43</td> <td>6.68</td> <td>32.21</td> <td>6.00</td> <td>303</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2441.00	112.46	-----	-----	99.56	32.43	6.68	32.21	6.00	303	360	PEAK	2	2441.00	81.68	-----	-----	68.78	32.43	6.68	32.21	6.00	303	360	AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	2304.23	55.36	74.00	-18.64	42.55	32.41	6.59	32.19	6.00	303	360	PEAK																																																																																																
2	2304.23	24.58	54.00	-29.42	11.77	32.41	6.59	32.19	6.00	303	360	AVERAGE																																																																																																
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	2441.00	112.46	-----	-----	99.56	32.43	6.68	32.21	6.00	303	360	PEAK																																																																																																
2	2441.00	81.68	-----	-----	68.78	32.43	6.68	32.21	6.00	303	360	AVERAGE																																																																																																





Mode	5																																																								
	Band Edge - R																																																								
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																								
ANT	Printed																																																								
Pol.	Vertical	Fundamental																																																							
Peak	<p>The plot shows a signal level starting at approximately 113.8 dBuV/m at 2440 MHz, dropping to a noise floor around 50 dBuV/m by 2450 MHz. A red horizontal line indicates the FCC Part 15C limit at 81.3 dBuV/m. A peak is observed at 2487.04 MHz with a level of 55.29 dBuV/m. A table below the plot provides detailed parameters for this peak.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2487.04</td> <td>55.29</td> <td>74.00</td> <td>-18.71</td> <td>42.17</td> <td>32.62</td> <td>6.74</td> <td>32.24</td> <td>6.00</td> <td>303</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2487.04</td> <td>24.51</td> <td>54.00</td> <td>-29.49</td> <td>11.39</td> <td>32.62</td> <td>6.74</td> <td>32.24</td> <td>6.00</td> <td>303</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2487.04	55.29	74.00	-18.71	42.17	32.62	6.74	32.24	6.00	303	360	PEAK	2	2487.04	24.51	54.00	-29.49	11.39	32.62	6.74	32.24	6.00	303	360	AVERAGE	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	Remark																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																															
1	2487.04	55.29	74.00	-18.71	42.17	32.62	6.74	32.24	6.00	303	360	PEAK																																													
2	2487.04	24.51	54.00	-29.49	11.39	32.62	6.74	32.24	6.00	303	360	AVERAGE																																													



Mode	5																																																																																																																																																																																																																																																																																																																																
	Harmonic																																																																																																																																																																																																																																																																																																																																
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																																																																																																																																																																																																																																
ANT	Printed																																																																																																																																																																																																																																																																																																																																
Pol.	Horizontal	Vertical																																																																																																																																																																																																																																																																																																																															
Peak Avg																																																																																																																																																																																																																																																																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>4882.00</td><td>65.13</td><td>74.00</td><td>-8.87</td><td>82.68</td><td>34.14</td><td>9.53</td><td>61.22</td><td>0.00</td><td>120</td><td>17</td><td>PEAK</td></tr> <tr><td>2</td><td>4882.00</td><td>34.32</td><td>54.00</td><td>-19.68</td><td>51.87</td><td>34.14</td><td>9.53</td><td>61.22</td><td>0.00</td><td>120</td><td>17</td><td>AVERAGE</td></tr> <tr><td>3</td><td>7323.00</td><td>72.49</td><td>74.00</td><td>-1.51</td><td>85.85</td><td>35.70</td><td>11.69</td><td>60.75</td><td>0.00</td><td>107</td><td>338</td><td>PEAK</td></tr> <tr><td>4</td><td>7323.00</td><td>41.68</td><td>54.00</td><td>-12.32</td><td>55.04</td><td>35.70</td><td>11.69</td><td>60.75</td><td>0.00</td><td>107</td><td>338</td><td>AVERAGE</td></tr> <tr><td>5</td><td>9765.00</td><td>64.28</td><td>90.68</td><td>-26.40</td><td>74.92</td><td>37.00</td><td>13.59</td><td>61.23</td><td>0.00</td><td>100</td><td>28</td><td>PEAK</td></tr> <tr><td>6</td><td>12205.00</td><td>60.50</td><td>74.00</td><td>-13.50</td><td>67.74</td><td>38.00</td><td>15.43</td><td>61.47</td><td>0.00</td><td>325</td><td>326</td><td>PEAK</td></tr> <tr><td>7</td><td>12205.00</td><td>29.69</td><td>54.00</td><td>-24.31</td><td>36.93</td><td>38.00</td><td>15.43</td><td>61.47</td><td>0.00</td><td>325</td><td>326</td><td>AVERAGE</td></tr> <tr><td>8</td><td>14644.50</td><td>61.11</td><td>90.68</td><td>-29.57</td><td>68.00</td><td>39.54</td><td>16.98</td><td>63.41</td><td>0.00</td><td>271</td><td>0</td><td>Peak</td></tr> <tr><td>9</td><td>17086.50</td><td>55.55</td><td>90.68</td><td>-35.13</td><td>59.17</td><td>41.03</td><td>18.27</td><td>62.92</td><td>0.00</td><td>300</td><td>300</td><td>Peak</td></tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	65.13	74.00	-8.87	82.68	34.14	9.53	61.22	0.00	120	17	PEAK	2	4882.00	34.32	54.00	-19.68	51.87	34.14	9.53	61.22	0.00	120	17	AVERAGE	3	7323.00	72.49	74.00	-1.51	85.85	35.70	11.69	60.75	0.00	107	338	PEAK	4	7323.00	41.68	54.00	-12.32	55.04	35.70	11.69	60.75	0.00	107	338	AVERAGE	5	9765.00	64.28	90.68	-26.40	74.92	37.00	13.59	61.23	0.00	100	28	PEAK	6	12205.00	60.50	74.00	-13.50	67.74	38.00	15.43	61.47	0.00	325	326	PEAK	7	12205.00	29.69	54.00	-24.31	36.93	38.00	15.43	61.47	0.00	325	326	AVERAGE	8	14644.50	61.11	90.68	-29.57	68.00	39.54	16.98	63.41	0.00	271	0	Peak	9	17086.50	55.55	90.68	-35.13	59.17	41.03	18.27	62.92	0.00	300	300	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>4882.00</td><td>64.04</td><td>74.00</td><td>-9.16</td><td>82.39</td><td>34.14</td><td>9.53</td><td>61.22</td><td>0.00</td><td>102</td><td>2</td><td>PEAK</td></tr> <tr><td>2</td><td>4882.00</td><td>34.03</td><td>54.00</td><td>-19.97</td><td>51.58</td><td>34.14</td><td>9.53</td><td>61.22</td><td>0.00</td><td>102</td><td>2</td><td>AVERAGE</td></tr> <tr><td>3</td><td>5985.00</td><td>50.30</td><td>91.74</td><td>-41.44</td><td>65.11</td><td>35.34</td><td>10.57</td><td>60.72</td><td>0.00</td><td>100</td><td>101</td><td>Peak</td></tr> <tr><td>4</td><td>7323.00</td><td>68.75</td><td>74.00</td><td>-5.25</td><td>82.11</td><td>35.70</td><td>11.69</td><td>60.75</td><td>0.00</td><td>100</td><td>293</td><td>PEAK</td></tr> <tr><td>5</td><td>7323.00</td><td>37.94</td><td>54.00</td><td>-16.06</td><td>51.30</td><td>35.70</td><td>11.69</td><td>60.75</td><td>0.00</td><td>100</td><td>293</td><td>AVERAGE</td></tr> <tr><td>6</td><td>7987.50</td><td>48.37</td><td>91.74</td><td>-43.37</td><td>60.32</td><td>35.83</td><td>12.41</td><td>60.19</td><td>0.00</td><td>100</td><td>53</td><td>Peak</td></tr> <tr><td>7</td><td>9765.00</td><td>61.73</td><td>91.74</td><td>-30.01</td><td>72.37</td><td>37.00</td><td>13.59</td><td>61.23</td><td>0.00</td><td>300</td><td>33</td><td>Peak</td></tr> <tr><td>8</td><td>12205.00</td><td>54.95</td><td>74.00</td><td>-19.05</td><td>62.19</td><td>38.00</td><td>15.43</td><td>61.47</td><td>0.00</td><td>269</td><td>236</td><td>PEAK</td></tr> <tr><td>9</td><td>12205.00</td><td>24.14</td><td>54.00</td><td>-29.86</td><td>31.38</td><td>38.00</td><td>15.43</td><td>61.47</td><td>0.00</td><td>269</td><td>236</td><td>AVERAGE</td></tr> <tr><td>10</td><td>14644.50</td><td>56.84</td><td>91.74</td><td>-34.90</td><td>63.73</td><td>39.54</td><td>16.98</td><td>63.41</td><td>0.00</td><td>300</td><td>196</td><td>Peak</td></tr> <tr><td>11</td><td>17086.50</td><td>51.61</td><td>91.74</td><td>-40.13</td><td>55.23</td><td>41.03</td><td>18.27</td><td>62.92</td><td>0.00</td><td>300</td><td>286</td><td>Peak</td></tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	64.04	74.00	-9.16	82.39	34.14	9.53	61.22	0.00	102	2	PEAK	2	4882.00	34.03	54.00	-19.97	51.58	34.14	9.53	61.22	0.00	102	2	AVERAGE	3	5985.00	50.30	91.74	-41.44	65.11	35.34	10.57	60.72	0.00	100	101	Peak	4	7323.00	68.75	74.00	-5.25	82.11	35.70	11.69	60.75	0.00	100	293	PEAK	5	7323.00	37.94	54.00	-16.06	51.30	35.70	11.69	60.75	0.00	100	293	AVERAGE	6	7987.50	48.37	91.74	-43.37	60.32	35.83	12.41	60.19	0.00	100	53	Peak	7	9765.00	61.73	91.74	-30.01	72.37	37.00	13.59	61.23	0.00	300	33	Peak	8	12205.00	54.95	74.00	-19.05	62.19	38.00	15.43	61.47	0.00	269	236	PEAK	9	12205.00	24.14	54.00	-29.86	31.38	38.00	15.43	61.47	0.00	269	236	AVERAGE	10	14644.50	56.84	91.74	-34.90	63.73	39.54	16.98	63.41	0.00	300	196	Peak	11	17086.50	51.61	91.74	-40.13	55.23	41.03	18.27	62.92	0.00	300	286
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																																																																								
Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																																																																																																																								
1	4882.00	65.13	74.00	-8.87	82.68	34.14	9.53	61.22	0.00	120	17	PEAK																																																																																																																																																																																																																																																																																																																					
2	4882.00	34.32	54.00	-19.68	51.87	34.14	9.53	61.22	0.00	120	17	AVERAGE																																																																																																																																																																																																																																																																																																																					
3	7323.00	72.49	74.00	-1.51	85.85	35.70	11.69	60.75	0.00	107	338	PEAK																																																																																																																																																																																																																																																																																																																					
4	7323.00	41.68	54.00	-12.32	55.04	35.70	11.69	60.75	0.00	107	338	AVERAGE																																																																																																																																																																																																																																																																																																																					
5	9765.00	64.28	90.68	-26.40	74.92	37.00	13.59	61.23	0.00	100	28	PEAK																																																																																																																																																																																																																																																																																																																					
6	12205.00	60.50	74.00	-13.50	67.74	38.00	15.43	61.47	0.00	325	326	PEAK																																																																																																																																																																																																																																																																																																																					
7	12205.00	29.69	54.00	-24.31	36.93	38.00	15.43	61.47	0.00	325	326	AVERAGE																																																																																																																																																																																																																																																																																																																					
8	14644.50	61.11	90.68	-29.57	68.00	39.54	16.98	63.41	0.00	271	0	Peak																																																																																																																																																																																																																																																																																																																					
9	17086.50	55.55	90.68	-35.13	59.17	41.03	18.27	62.92	0.00	300	300	Peak																																																																																																																																																																																																																																																																																																																					
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																																																																								
Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																																																																																																																								
1	4882.00	64.04	74.00	-9.16	82.39	34.14	9.53	61.22	0.00	102	2	PEAK																																																																																																																																																																																																																																																																																																																					
2	4882.00	34.03	54.00	-19.97	51.58	34.14	9.53	61.22	0.00	102	2	AVERAGE																																																																																																																																																																																																																																																																																																																					
3	5985.00	50.30	91.74	-41.44	65.11	35.34	10.57	60.72	0.00	100	101	Peak																																																																																																																																																																																																																																																																																																																					
4	7323.00	68.75	74.00	-5.25	82.11	35.70	11.69	60.75	0.00	100	293	PEAK																																																																																																																																																																																																																																																																																																																					
5	7323.00	37.94	54.00	-16.06	51.30	35.70	11.69	60.75	0.00	100	293	AVERAGE																																																																																																																																																																																																																																																																																																																					
6	7987.50	48.37	91.74	-43.37	60.32	35.83	12.41	60.19	0.00	100	53	Peak																																																																																																																																																																																																																																																																																																																					
7	9765.00	61.73	91.74	-30.01	72.37	37.00	13.59	61.23	0.00	300	33	Peak																																																																																																																																																																																																																																																																																																																					
8	12205.00	54.95	74.00	-19.05	62.19	38.00	15.43	61.47	0.00	269	236	PEAK																																																																																																																																																																																																																																																																																																																					
9	12205.00	24.14	54.00	-29.86	31.38	38.00	15.43	61.47	0.00	269	236	AVERAGE																																																																																																																																																																																																																																																																																																																					
10	14644.50	56.84	91.74	-34.90	63.73	39.54	16.98	63.41	0.00	300	196	Peak																																																																																																																																																																																																																																																																																																																					
11	17086.50	51.61	91.74	-40.13	55.23	41.03	18.27	62.92	0.00	300	286	Peak																																																																																																																																																																																																																																																																																																																					



Mode	6																																																																																																												
	Band Edge																																																																																																												
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																												
ANT	Printed																																																																																																												
Pol.	Horizontal	Fundamental																																																																																																											
Peak																																																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2487.96</td> <td>64.42</td> <td>74.00</td> <td>-9.58</td> <td>51.29</td> <td>32.63</td> <td>6.74</td> <td>32.24</td> <td>6.00</td> <td>346</td> <td>14 PEAK</td> </tr> <tr> <td>2</td> <td>2487.96</td> <td>33.64</td> <td>54.00</td> <td>-20.36</td> <td>20.51</td> <td>32.63</td> <td>6.74</td> <td>32.24</td> <td>6.00</td> <td>346</td> <td>14 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	2487.96	64.42	74.00	-9.58	51.29	32.63	6.74	32.24	6.00	346	14 PEAK	2	2487.96	33.64	54.00	-20.36	20.51	32.63	6.74	32.24	6.00	346	14 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>113.40</td> <td>-----</td> <td>-----</td> <td>100.40</td> <td>32.58</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>346</td> <td>14 PEAK</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>82.70</td> <td>-----</td> <td>-----</td> <td>69.62</td> <td>32.58</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>346</td> <td>14 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	2480.00	113.40	-----	-----	100.40	32.58	6.73	32.23	6.00	346	14 PEAK	2	2480.00	82.70	-----	-----	69.62	32.58	6.73	32.23	6.00	346
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																																				
1	2487.96	64.42	74.00	-9.58	51.29	32.63	6.74	32.24	6.00	346	14 PEAK																																																																																																		
2	2487.96	33.64	54.00	-20.36	20.51	32.63	6.74	32.24	6.00	346	14 AVERAGE																																																																																																		
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																																				
1	2480.00	113.40	-----	-----	100.40	32.58	6.73	32.23	6.00	346	14 PEAK																																																																																																		
2	2480.00	82.70	-----	-----	69.62	32.58	6.73	32.23	6.00	346	14 AVERAGE																																																																																																		







Mode	6																																																																																																																			
	Band Edge																																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																			
ANT	Printed																																																																																																																			
Pol.	Vertical	Fundamental																																																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.78</td> <td>62.19</td> <td>74.00</td> <td>-11.81</td> <td>49.00</td> <td>32.61</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>299</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2484.78</td> <td>31.41</td> <td>54.00</td> <td>-22.59</td> <td>18.30</td> <td>32.61</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>299</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2484.78	62.19	74.00	-11.81	49.00	32.61	6.73	32.23	6.00	299	360	PEAK	2	2484.78	31.41	54.00	-22.59	18.30	32.61	6.73	32.23	6.00	299	360	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>111.96</td> <td>-----</td> <td>-----</td> <td>98.88</td> <td>32.58</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>299</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>81.18</td> <td>-----</td> <td>-----</td> <td>68.10</td> <td>32.58</td> <td>6.73</td> <td>32.23</td> <td>6.00</td> <td>299</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2480.00	111.96	-----	-----	98.88	32.58	6.73	32.23	6.00	299	360	PEAK	2	2480.00	81.18	-----	-----	68.10	32.58	6.73	32.23	6.00	299	360	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																										
1	2484.78	62.19	74.00	-11.81	49.00	32.61	6.73	32.23	6.00	299	360	PEAK																																																																																																								
2	2484.78	31.41	54.00	-22.59	18.30	32.61	6.73	32.23	6.00	299	360	AVERAGE																																																																																																								
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																										
1	2480.00	111.96	-----	-----	98.88	32.58	6.73	32.23	6.00	299	360	PEAK																																																																																																								
2	2480.00	81.18	-----	-----	68.10	32.58	6.73	32.23	6.00	299	360	AVERAGE																																																																																																								



Mode	6																																																																																																																																																																																																																																																																																							
	Harmonic																																																																																																																																																																																																																																																																																							
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																																																																																																																																																																							
ANT	Printed																																																																																																																																																																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																																																																																																																																																																						
Peak																																																																																																																																																																																																																																																																																								
Avg																																																																																																																																																																																																																																																																																								
	<table border="1"> <thead> <tr> <th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr> </thead> <tbody> <tr><td>1</td><td>4960.00</td><td>65.60</td><td>74.00</td><td>-8.40</td><td>83.15</td><td>34.00</td><td>9.61</td><td>61.16</td><td>0.00</td><td>131</td><td>1 PEAK</td></tr> <tr><td>2</td><td>4960.00</td><td>34.79</td><td>54.00</td><td>-19.21</td><td>52.34</td><td>34.00</td><td>9.61</td><td>61.16</td><td>0.00</td><td>131</td><td>1 AVERAGE</td></tr> <tr><td>3</td><td>7440.00</td><td>71.93</td><td>74.00</td><td>-2.07</td><td>85.48</td><td>35.70</td><td>11.77</td><td>61.02</td><td>0.00</td><td>100</td><td>337 PEAK</td></tr> <tr><td>4</td><td>7440.00</td><td>41.12</td><td>54.00</td><td>-12.88</td><td>54.67</td><td>35.70</td><td>11.77</td><td>61.02</td><td>0.00</td><td>100</td><td>337 AVERAGE</td></tr> <tr><td>5</td><td>9919.50</td><td>67.53</td><td>90.77</td><td>-23.24</td><td>77.76</td><td>37.28</td><td>13.77</td><td>61.28</td><td>0.00</td><td>100</td><td>357 Peak</td></tr> <tr><td>6</td><td>12400.00</td><td>66.27</td><td>74.00</td><td>-7.73</td><td>73.51</td><td>38.00</td><td>15.58</td><td>61.62</td><td>0.00</td><td>310</td><td>330 PEAK</td></tr> <tr><td>7</td><td>12400.00</td><td>35.46</td><td>54.00</td><td>-18.54</td><td>42.70</td><td>38.00</td><td>15.58</td><td>61.62</td><td>0.00</td><td>310</td><td>330 AVERAGE</td></tr> <tr><td>8</td><td>14878.50</td><td>63.39</td><td>90.77</td><td>-27.38</td><td>70.21</td><td>39.68</td><td>17.15</td><td>63.65</td><td>0.00</td><td>252</td><td>360 Peak</td></tr> <tr><td>9</td><td>17361.00</td><td>55.47</td><td>90.77</td><td>-35.30</td><td>59.07</td><td>40.90</td><td>18.44</td><td>62.94</td><td>0.00</td><td>300</td><td>293 Peak</td></tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	65.60	74.00	-8.40	83.15	34.00	9.61	61.16	0.00	131	1 PEAK	2	4960.00	34.79	54.00	-19.21	52.34	34.00	9.61	61.16	0.00	131	1 AVERAGE	3	7440.00	71.93	74.00	-2.07	85.48	35.70	11.77	61.02	0.00	100	337 PEAK	4	7440.00	41.12	54.00	-12.88	54.67	35.70	11.77	61.02	0.00	100	337 AVERAGE	5	9919.50	67.53	90.77	-23.24	77.76	37.28	13.77	61.28	0.00	100	357 Peak	6	12400.00	66.27	74.00	-7.73	73.51	38.00	15.58	61.62	0.00	310	330 PEAK	7	12400.00	35.46	54.00	-18.54	42.70	38.00	15.58	61.62	0.00	310	330 AVERAGE	8	14878.50	63.39	90.77	-27.38	70.21	39.68	17.15	63.65	0.00	252	360 Peak	9	17361.00	55.47	90.77	-35.30	59.07	40.90	18.44	62.94	0.00	300	293 Peak	<table border="1"> <thead> <tr> <th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr> </thead> <tbody> <tr><td>1</td><td>4960.00</td><td>65.42</td><td>74.00</td><td>-8.58</td><td>82.97</td><td>34.00</td><td>9.61</td><td>61.16</td><td>0.00</td><td>108</td><td>2 PEAK</td></tr> <tr><td>2</td><td>4960.00</td><td>34.61</td><td>54.00</td><td>-19.39</td><td>52.16</td><td>34.00</td><td>9.61</td><td>61.16</td><td>0.00</td><td>108</td><td>2 AVERAGE</td></tr> <tr><td>3</td><td>7440.00</td><td>69.42</td><td>74.00</td><td>-4.58</td><td>82.97</td><td>35.70</td><td>11.77</td><td>61.02</td><td>0.00</td><td>100</td><td>292 PEAK</td></tr> <tr><td>4</td><td>7440.00</td><td>38.61</td><td>54.00</td><td>-15.39</td><td>52.16</td><td>35.70</td><td>11.77</td><td>61.02</td><td>0.00</td><td>100</td><td>292 AVERAGE</td></tr> <tr><td>5</td><td>9921.00</td><td>66.56</td><td>91.16</td><td>-24.60</td><td>76.79</td><td>37.28</td><td>13.77</td><td>61.28</td><td>0.00</td><td>100</td><td>8 Peak</td></tr> <tr><td>6</td><td>12400.00</td><td>59.55</td><td>74.00</td><td>-14.45</td><td>66.79</td><td>38.00</td><td>15.58</td><td>61.62</td><td>0.00</td><td>100</td><td>175 PEAK</td></tr> <tr><td>7</td><td>12400.00</td><td>28.74</td><td>54.00</td><td>-25.26</td><td>35.98</td><td>38.00</td><td>15.58</td><td>61.62</td><td>0.00</td><td>100</td><td>175 AVERAGE</td></tr> <tr><td>8</td><td>14878.50</td><td>59.94</td><td>91.16</td><td>-31.22</td><td>66.76</td><td>39.68</td><td>17.15</td><td>63.65</td><td>0.00</td><td>229</td><td>0 Peak</td></tr> <tr><td>9</td><td>17361.00</td><td>52.67</td><td>91.16</td><td>-38.49</td><td>56.27</td><td>40.90</td><td>18.44</td><td>62.94</td><td>0.00</td><td>300</td><td>15 Peak</td></tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	65.42	74.00	-8.58	82.97	34.00	9.61	61.16	0.00	108	2 PEAK	2	4960.00	34.61	54.00	-19.39	52.16	34.00	9.61	61.16	0.00	108	2 AVERAGE	3	7440.00	69.42	74.00	-4.58	82.97	35.70	11.77	61.02	0.00	100	292 PEAK	4	7440.00	38.61	54.00	-15.39	52.16	35.70	11.77	61.02	0.00	100	292 AVERAGE	5	9921.00	66.56	91.16	-24.60	76.79	37.28	13.77	61.28	0.00	100	8 Peak	6	12400.00	59.55	74.00	-14.45	66.79	38.00	15.58	61.62	0.00	100	175 PEAK	7	12400.00	28.74	54.00	-25.26	35.98	38.00	15.58	61.62	0.00	100	175 AVERAGE	8	14878.50	59.94	91.16	-31.22	66.76	39.68	17.15	63.65	0.00	229	0 Peak	9	17361.00	52.67	91.16	-38.49	56.27	40.90	18.44	62.94	0.00	300	15 Peak
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																																														
1	4960.00	65.60	74.00	-8.40	83.15	34.00	9.61	61.16	0.00	131	1 PEAK																																																																																																																																																																																																																																																																													
2	4960.00	34.79	54.00	-19.21	52.34	34.00	9.61	61.16	0.00	131	1 AVERAGE																																																																																																																																																																																																																																																																													
3	7440.00	71.93	74.00	-2.07	85.48	35.70	11.77	61.02	0.00	100	337 PEAK																																																																																																																																																																																																																																																																													
4	7440.00	41.12	54.00	-12.88	54.67	35.70	11.77	61.02	0.00	100	337 AVERAGE																																																																																																																																																																																																																																																																													
5	9919.50	67.53	90.77	-23.24	77.76	37.28	13.77	61.28	0.00	100	357 Peak																																																																																																																																																																																																																																																																													
6	12400.00	66.27	74.00	-7.73	73.51	38.00	15.58	61.62	0.00	310	330 PEAK																																																																																																																																																																																																																																																																													
7	12400.00	35.46	54.00	-18.54	42.70	38.00	15.58	61.62	0.00	310	330 AVERAGE																																																																																																																																																																																																																																																																													
8	14878.50	63.39	90.77	-27.38	70.21	39.68	17.15	63.65	0.00	252	360 Peak																																																																																																																																																																																																																																																																													
9	17361.00	55.47	90.77	-35.30	59.07	40.90	18.44	62.94	0.00	300	293 Peak																																																																																																																																																																																																																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																																														
1	4960.00	65.42	74.00	-8.58	82.97	34.00	9.61	61.16	0.00	108	2 PEAK																																																																																																																																																																																																																																																																													
2	4960.00	34.61	54.00	-19.39	52.16	34.00	9.61	61.16	0.00	108	2 AVERAGE																																																																																																																																																																																																																																																																													
3	7440.00	69.42	74.00	-4.58	82.97	35.70	11.77	61.02	0.00	100	292 PEAK																																																																																																																																																																																																																																																																													
4	7440.00	38.61	54.00	-15.39	52.16	35.70	11.77	61.02	0.00	100	292 AVERAGE																																																																																																																																																																																																																																																																													
5	9921.00	66.56	91.16	-24.60	76.79	37.28	13.77	61.28	0.00	100	8 Peak																																																																																																																																																																																																																																																																													
6	12400.00	59.55	74.00	-14.45	66.79	38.00	15.58	61.62	0.00	100	175 PEAK																																																																																																																																																																																																																																																																													
7	12400.00	28.74	54.00	-25.26	35.98	38.00	15.58	61.62	0.00	100	175 AVERAGE																																																																																																																																																																																																																																																																													
8	14878.50	59.94	91.16	-31.22	66.76	39.68	17.15	63.65	0.00	229	0 Peak																																																																																																																																																																																																																																																																													
9	17361.00	52.67	91.16	-38.49	56.27	40.90	18.44	62.94	0.00	300	15 Peak																																																																																																																																																																																																																																																																													

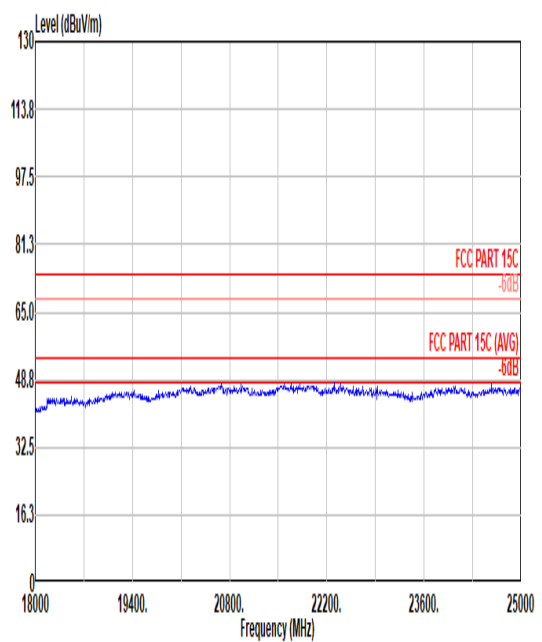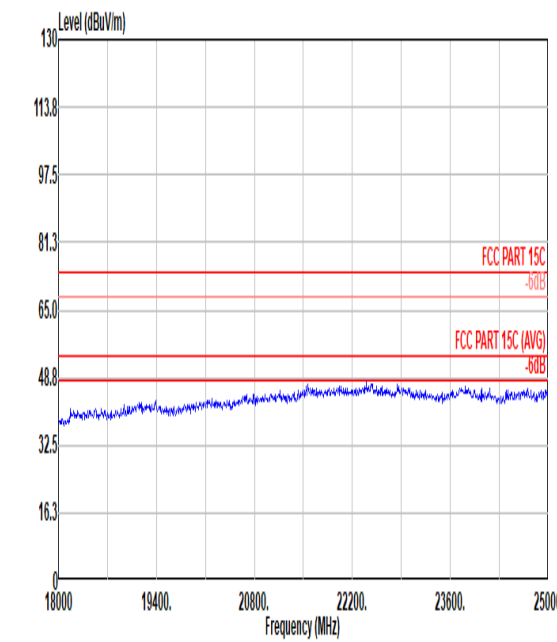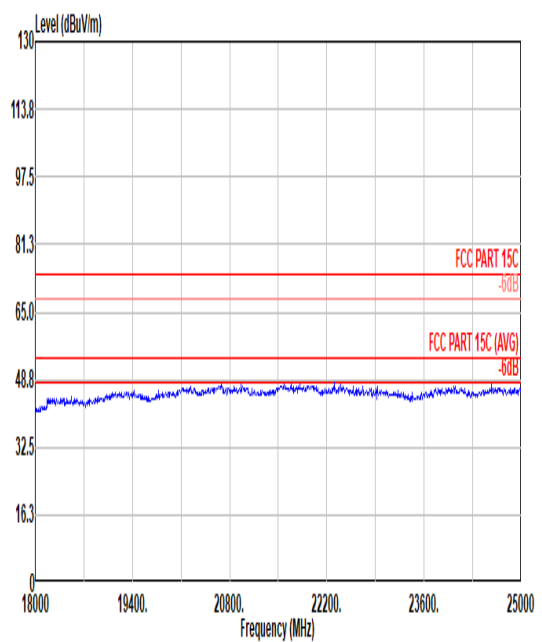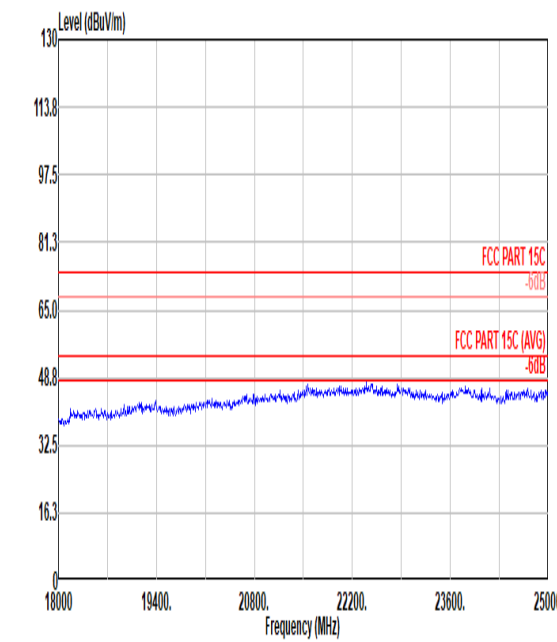

Mode	5	
	18G-25G	
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz	
ANT	Printed	
Pol.	Horizontal	Vertical
Peak		
Avg		




Mode	5																																																																																																																																																																																							
	30-1G																																																																																																																																																																																							
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																																																																																							
ANT	Printed																																																																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																																																																						
QP	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dBuV/m)</th> <th>Over Limit (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>48.43</td><td>22.47</td><td>40.00</td><td>-17.53</td><td>38.97</td><td>15.45</td><td>0.98</td><td>32.93</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>161.92</td><td>34.72</td><td>43.50</td><td>-8.78</td><td>49.18</td><td>16.38</td><td>1.85</td><td>32.69</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>239.52</td><td>24.63</td><td>46.00</td><td>-21.37</td><td>38.25</td><td>17.33</td><td>2.09</td><td>33.04</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>320.03</td><td>36.94</td><td>46.00</td><td>-9.06</td><td>47.34</td><td>19.85</td><td>2.64</td><td>32.89</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>399.57</td><td>37.46</td><td>46.00</td><td>-8.54</td><td>45.91</td><td>21.67</td><td>2.99</td><td>33.31</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>450.01</td><td>32.86</td><td>46.00</td><td>-13.14</td><td>39.89</td><td>22.95</td><td>3.14</td><td>33.12</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	48.43	22.47	40.00	-17.53	38.97	15.45	0.98	32.93	0.00	---	---	Peak	2	161.92	34.72	43.50	-8.78	49.18	16.38	1.85	32.69	0.00	---	---	Peak	3	239.52	24.63	46.00	-21.37	38.25	17.33	2.09	33.04	0.00	---	---	Peak	4	320.03	36.94	46.00	-9.06	47.34	19.85	2.64	32.89	0.00	---	---	Peak	5	399.57	37.46	46.00	-8.54	45.91	21.67	2.99	33.31	0.00	---	---	Peak	6	450.01	32.86	46.00	-13.14	39.89	22.95	3.14	33.12	0.00	---	---	Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dBuV/m)</th> <th>Over Limit (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>48.43</td><td>25.05</td><td>40.00</td><td>-14.95</td><td>41.55</td><td>15.45</td><td>0.98</td><td>32.93</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>161.92</td><td>25.73</td><td>43.50</td><td>-17.77</td><td>40.19</td><td>16.38</td><td>1.85</td><td>32.69</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>320.03</td><td>30.57</td><td>46.00</td><td>-15.43</td><td>40.97</td><td>19.85</td><td>2.64</td><td>32.89</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>462.62</td><td>28.35</td><td>46.00</td><td>-17.65</td><td>35.16</td><td>23.23</td><td>3.14</td><td>33.18</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>558.65</td><td>27.90</td><td>46.00</td><td>-18.10</td><td>32.89</td><td>25.29</td><td>3.27</td><td>33.55</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>675.05</td><td>29.70</td><td>46.00</td><td>-16.30</td><td>32.82</td><td>26.59</td><td>3.84</td><td>33.55</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	48.43	25.05	40.00	-14.95	41.55	15.45	0.98	32.93	0.00	---	---	Peak	2	161.92	25.73	43.50	-17.77	40.19	16.38	1.85	32.69	0.00	---	---	Peak	3	320.03	30.57	46.00	-15.43	40.97	19.85	2.64	32.89	0.00	---	---	Peak	4	462.62	28.35	46.00	-17.65	35.16	23.23	3.14	33.18	0.00	---	---	Peak	5	558.65	27.90	46.00	-18.10	32.89	25.29	3.27	33.55	0.00	---	---	Peak	6	675.05	29.70	46.00	-16.30	32.82	26.59	3.84	33.55	0.00	---	---	Peak
	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																																											
1	48.43	22.47	40.00	-17.53	38.97	15.45	0.98	32.93	0.00	---	---	Peak																																																																																																																																																																												
2	161.92	34.72	43.50	-8.78	49.18	16.38	1.85	32.69	0.00	---	---	Peak																																																																																																																																																																												
3	239.52	24.63	46.00	-21.37	38.25	17.33	2.09	33.04	0.00	---	---	Peak																																																																																																																																																																												
4	320.03	36.94	46.00	-9.06	47.34	19.85	2.64	32.89	0.00	---	---	Peak																																																																																																																																																																												
5	399.57	37.46	46.00	-8.54	45.91	21.67	2.99	33.31	0.00	---	---	Peak																																																																																																																																																																												
6	450.01	32.86	46.00	-13.14	39.89	22.95	3.14	33.12	0.00	---	---	Peak																																																																																																																																																																												
Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																																												
1	48.43	25.05	40.00	-14.95	41.55	15.45	0.98	32.93	0.00	---	---	Peak																																																																																																																																																																												
2	161.92	25.73	43.50	-17.77	40.19	16.38	1.85	32.69	0.00	---	---	Peak																																																																																																																																																																												
3	320.03	30.57	46.00	-15.43	40.97	19.85	2.64	32.89	0.00	---	---	Peak																																																																																																																																																																												
4	462.62	28.35	46.00	-17.65	35.16	23.23	3.14	33.18	0.00	---	---	Peak																																																																																																																																																																												
5	558.65	27.90	46.00	-18.10	32.89	25.29	3.27	33.55	0.00	---	---	Peak																																																																																																																																																																												
6	675.05	29.70	46.00	-16.30	32.82	26.59	3.84	33.55	0.00	---	---	Peak																																																																																																																																																																												




# Appendix D. Duty Cycle Plots

## Ant2 Printed Antenna:

### 3DH5 on time (One Pulse) Plot on Channel 00

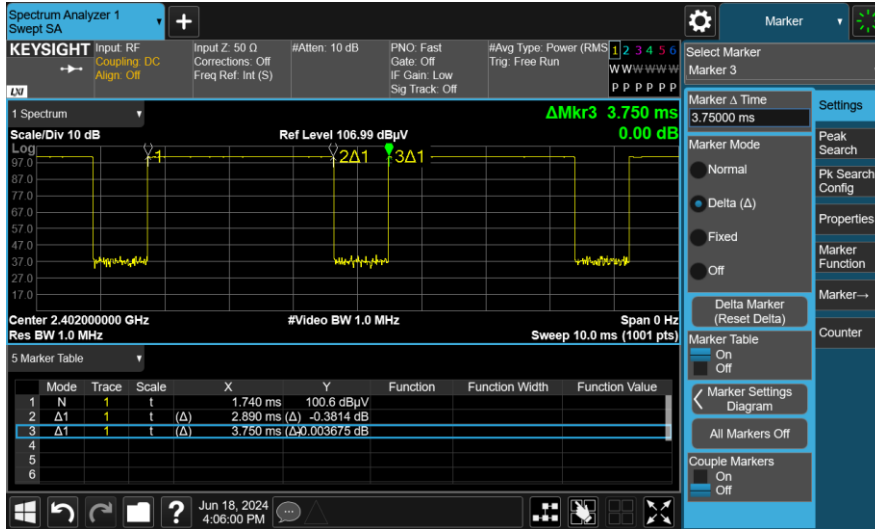

### 3DH5 on time (Count Pulses) Plot on Channel 00

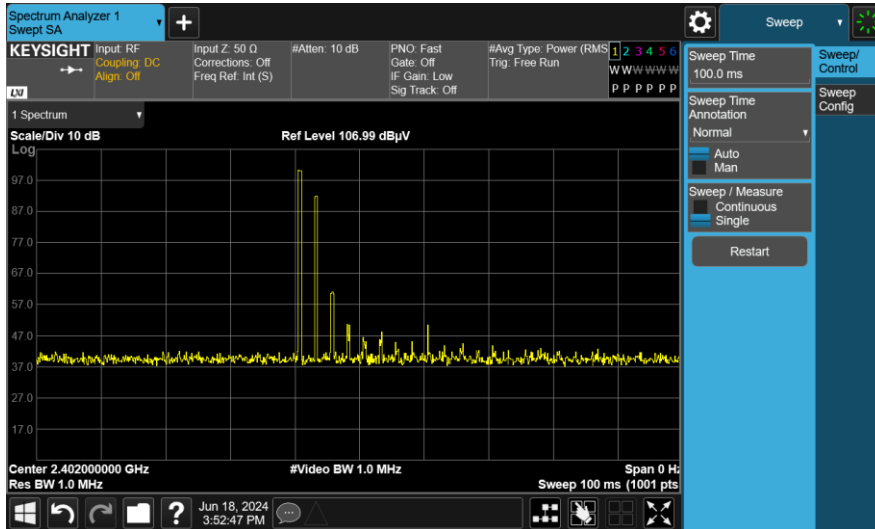

**Note:**

1. Worst case Duty cycle = on time/100 milliseconds = 1 \* 2.89 / 100 = 2.89 %
2. Worst case Duty cycle correction factor = 20\*log(Duty cycle) = -30.78 dB
3. 3DH5 has the highest duty cycle worst case and is reported.




# Ant1 Chip Antenna:

## 3DH5 on time (One Pulse) Plot on Channel 39



## 3DH5 on time (Count Pulses) Plot on Channel 39

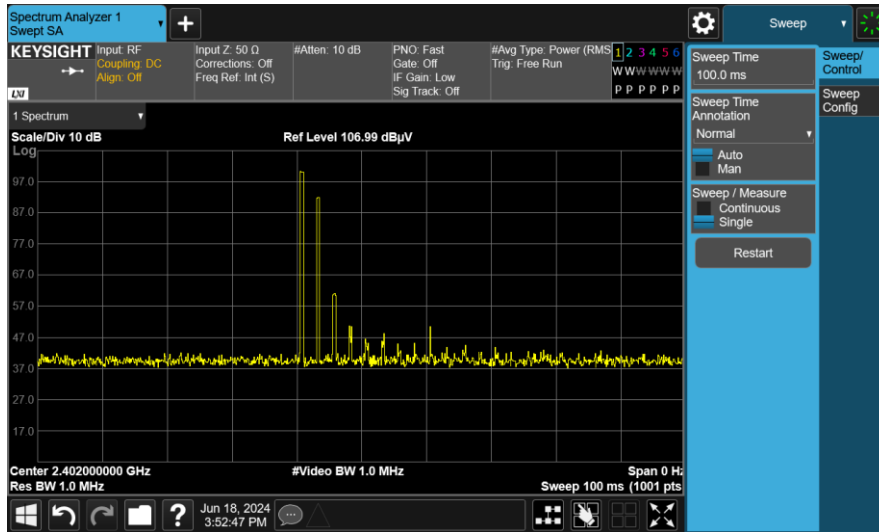

**Note:**

1. Worst case Duty cycle = on time/100 milliseconds = 1 \* 2.88 / 100 = 2.88 %
2. Worst case Duty cycle correction factor = 20\*log(Duty cycle) = -30.81 dB
3. 3DH5 has the highest duty cycle worst case and is reported.