



FCC RF Test Report

APPLICANT : Cardo Systems, Ltd.
EQUIPMENT : SC EDGE
BRAND NAME : Cardo Systems, Ltd.
MODEL NAME : SC EDGE
FCC ID : Q95ER32
STANDARD : 47 CFR Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Jan. 23, 2025 ~ Feb. 13, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	9
2.6 Measurement Results Explanation Example.....	9
3 TEST RESULT	10
3.1 6dB and 99% Bandwidth Measurement	10
3.2 Output Power Measurement.....	11
3.3 Power Spectral Density Measurement	12
3.4 Conducted Band Edges and Spurious Emission Measurement	13
3.5 Spurious Emission Measurement in the Restricted Band	14
3.6 AC Conducted Emission Measurement.....	18
3.7 Antenna Requirements.....	20
4 LIST OF MEASURING EQUIPMENT.....	21
5 MEASUREMENT UNCERTAINTY	22
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR4D2601C	Rev. 01	Initial issue of report	Feb. 24, 2025

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)(3)	Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 0.04 dB at 7335.00 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 19.13 dB at 0.150 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Cardo Systems, Ltd.
101 E. Park Blvd, Suite 600, Plano TX, 75074 USA

1.2 Manufacturer

Cardo Systems, Ltd.
101 E. Park Blvd, Suite 600, Plano TX, 75074 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	SC EDGE
Brand Name	Cardo Systems, Ltd.
Model Name	SC EDGE
FCC ID	Q95ER32
SN	Conducted: SP4389A338 Conduction/Radiation: SP4389A317
HW Version	1
SW Version	1
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2405 MHz ~ 2475 MHz
Number of Channels	8
Channel Spacing	10 MHz
Carrier Frequency of Each Channel	2405 MHz, 2415MHz, ..., 2475MHz
Maximum Output Power to Antenna	15.65 dBm (0.0367 W)
99% Occupied Bandwidth	2.274MHz
Antenna Type / Gain	Printed Antenna (Ant.2) with gain 0 dBi
Type of Modulation	O-QPSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH06-KS	AUDIX	E3	210616
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05
- ♦ ANSI C63.10-2020

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	11	2405	19	2445
	13	2415	21	2455
	15	2425	23	2465
	17	2435	25	2475

2.2 Test Mode


- The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (Y plane as worst plane) from all possible combinations.
- AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	250kbps / Zigbee
Conducted TCs	Mode 1: Zigbee Tx CH11_2405 MHz Mode 2: Zigbee Tx CH19_2445 MHz Mode 3: Zigbee Tx CH21_2455 MHz Mode 4: Zigbee Tx CH23_2465 MHz Mode 5: Zigbee Tx CH25_2475 MHz
Radiated TCs	Mode 1: Zigbee Tx CH11_2405 MHz Mode 2: Zigbee Tx CH19_2445 MHz Mode 3: Zigbee Tx CH25_2475 MHz Mode 4: Zigbee Tx CH23_2465 MHz Mode 5: Zigbee Tx CH21_2455 MHz Mode 6: Co-location mode: Zigbee Tx CH21 + BLE 2Mbps Tx CH39
AC Conducted Emission	Mode 1: Zigbee TX+ USB Cable(Charging from adapter)
Remark: For Radiated TCs, The tests were performance with Notebook.	

2.3 Connection Diagram of Test System

AC Conducted Emission:

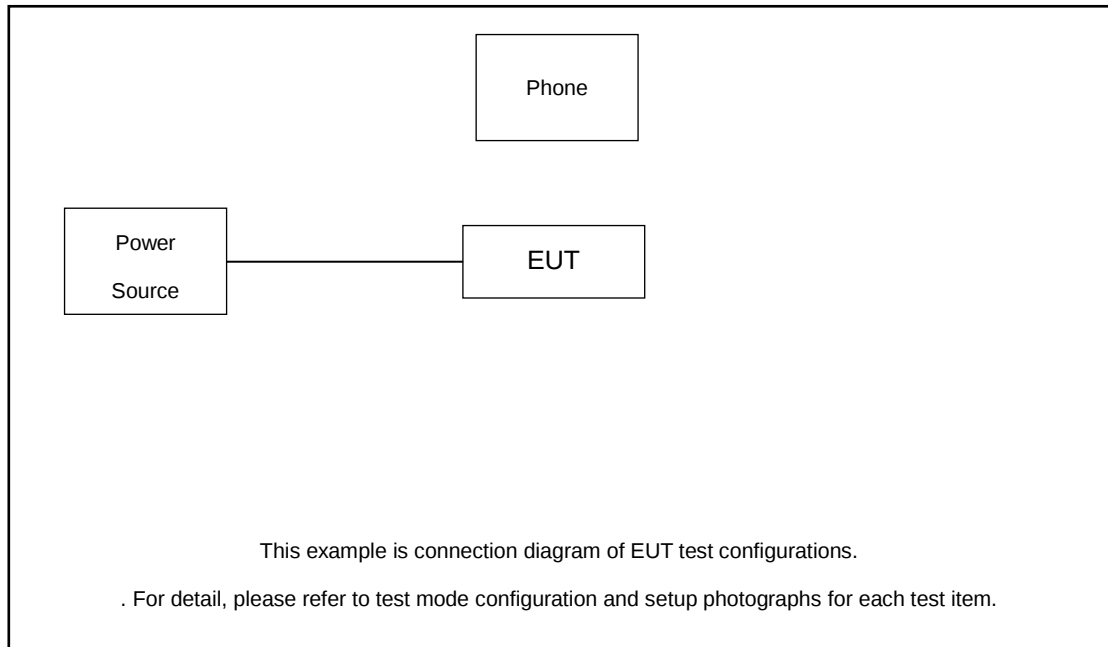

Radiated Emission:

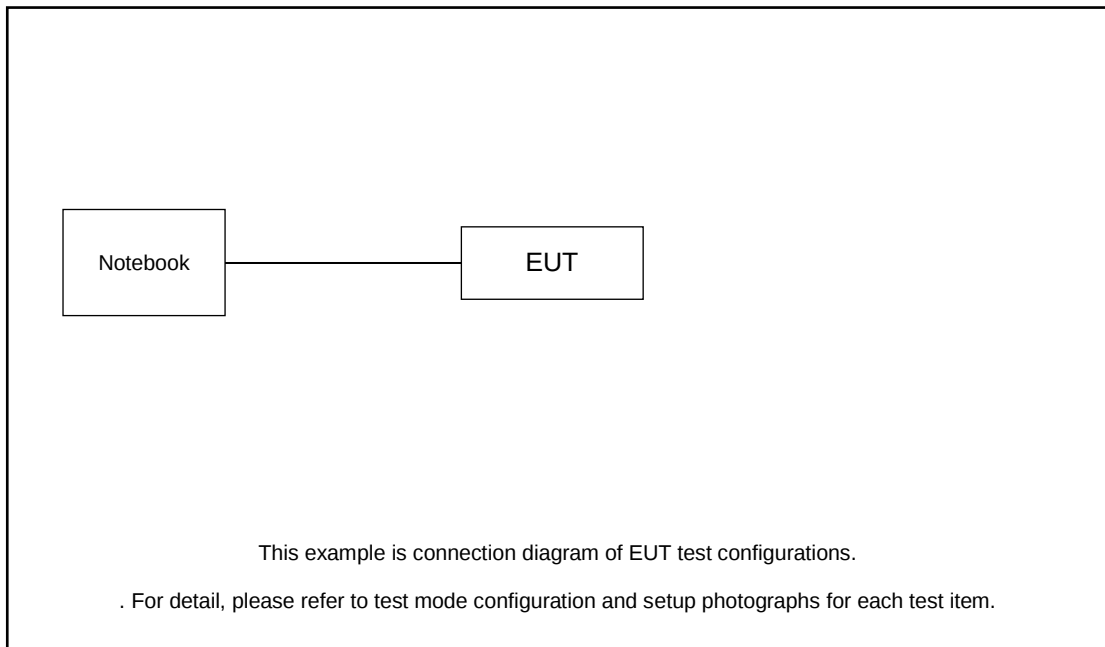

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	N/A	N/A	N/A	N/A	N/A
2.	Phone	N/A	N/A	N/A	N/A	N/A
3.	Adapter	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For ZigBee function, the engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the Phone under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.19 dB and 20dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 2.19 + 20 = 22.19 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2020 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz. Set the Video bandwidth (VBW) $\geq 3 \times$ RBW. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup

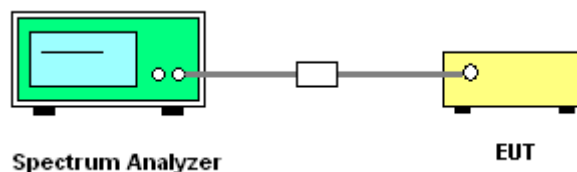

3.1.5 Test Result of 6dB Bandwidth and 99% Occupied Bandwidth

Test data refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2020 clause 11.9.1.2 PKPM1 Peak power meter or ANSI C63.10-2020 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

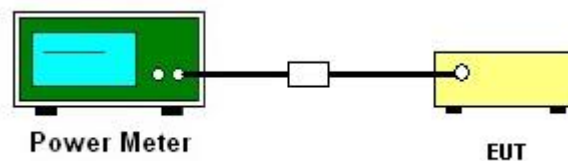

3.2.5 Test Result of Peak Output Power

Test data refers to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Test data refers to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2020 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) to $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$. Video bandwidth $\text{VBW} \geq 3 \times \text{RBW}$. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

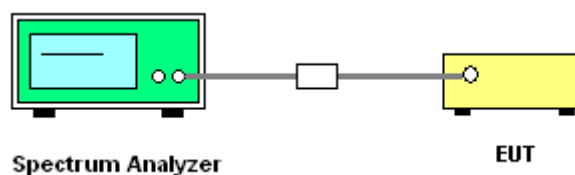

3.3.5 Test Result of Power Spectral Density

Test data refers to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2020 clause 11.11&11.12.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW $\geq 3 \times$ RBW, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup



3.4.5 Test Result of Conducted Band Edges Plots

Test data refers to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Test data refers to Appendix A.

3.5 Spurious Emission Measurement in the Restricted Band

3.5.1 Limit of Spurious Emission Measurement in the Restricted Band

Emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.




3.5.3 Test Procedures

1. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
5. For conducted spurious emission measurement in the restricted band, the RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
6. For measurement below 1GHz, if the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1\text{ GHz}$, RBW=1MHz for $f > 1\text{ GHz}$; VBW $\geq 3 \times \text{RBW}$; Sweep = auto; Detector function = peak; Trace = max hold for peak;
 - (3) For average measurement: use duty cycle correction factor method per C63.10-2020 11.12.2.5.2.2. A correction factor shall be subtracted from the measurement results prior to comparing with the emission limit to compute the average emission level. The correction factor is computed as follows:
$$\text{Average Emission Level} = \text{Peak Emission Level} - 20 \cdot \log(1/\text{Duty cycle})$$


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (26.33dB) derived from $20 \log(1/DT)$. This correction is only for signals that the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.5.4 Test Setup


For radiated emissions below 30MHz

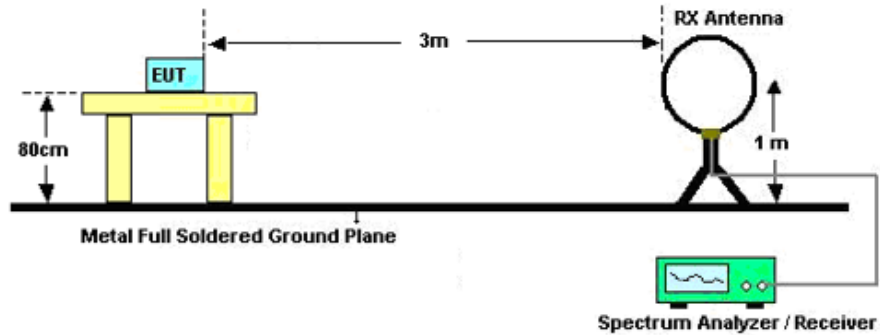

For radiated emissions from 30MHz to 1GHz

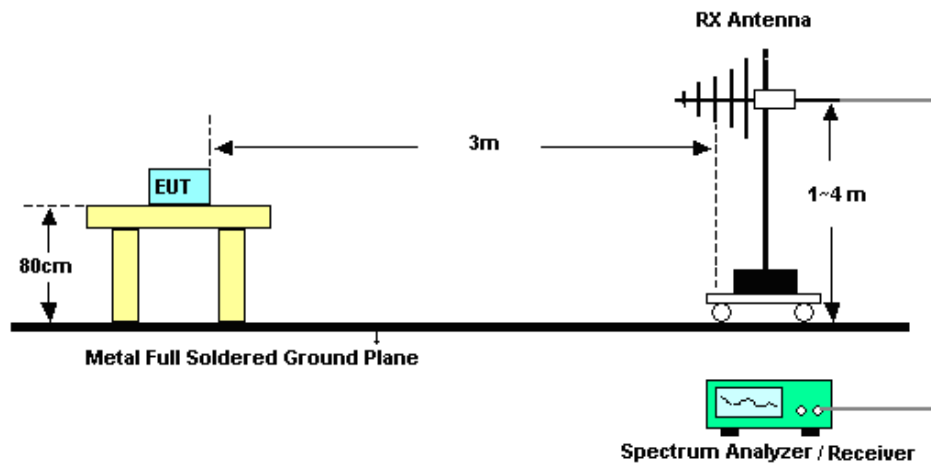

For radiated emissions above 1GHz

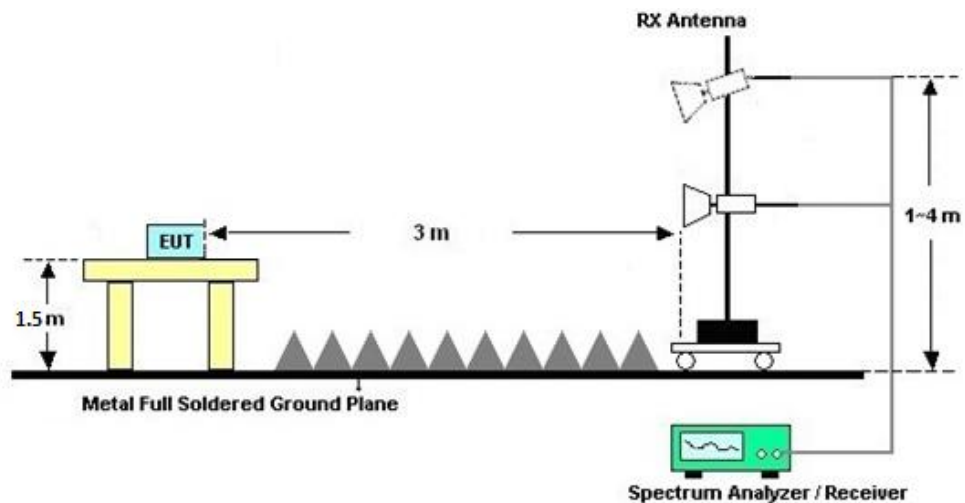

**3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

3.5.6 Test Results of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Test Result of Cabinet Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.5.8 Duty Cycle

Please refer to Appendix D.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

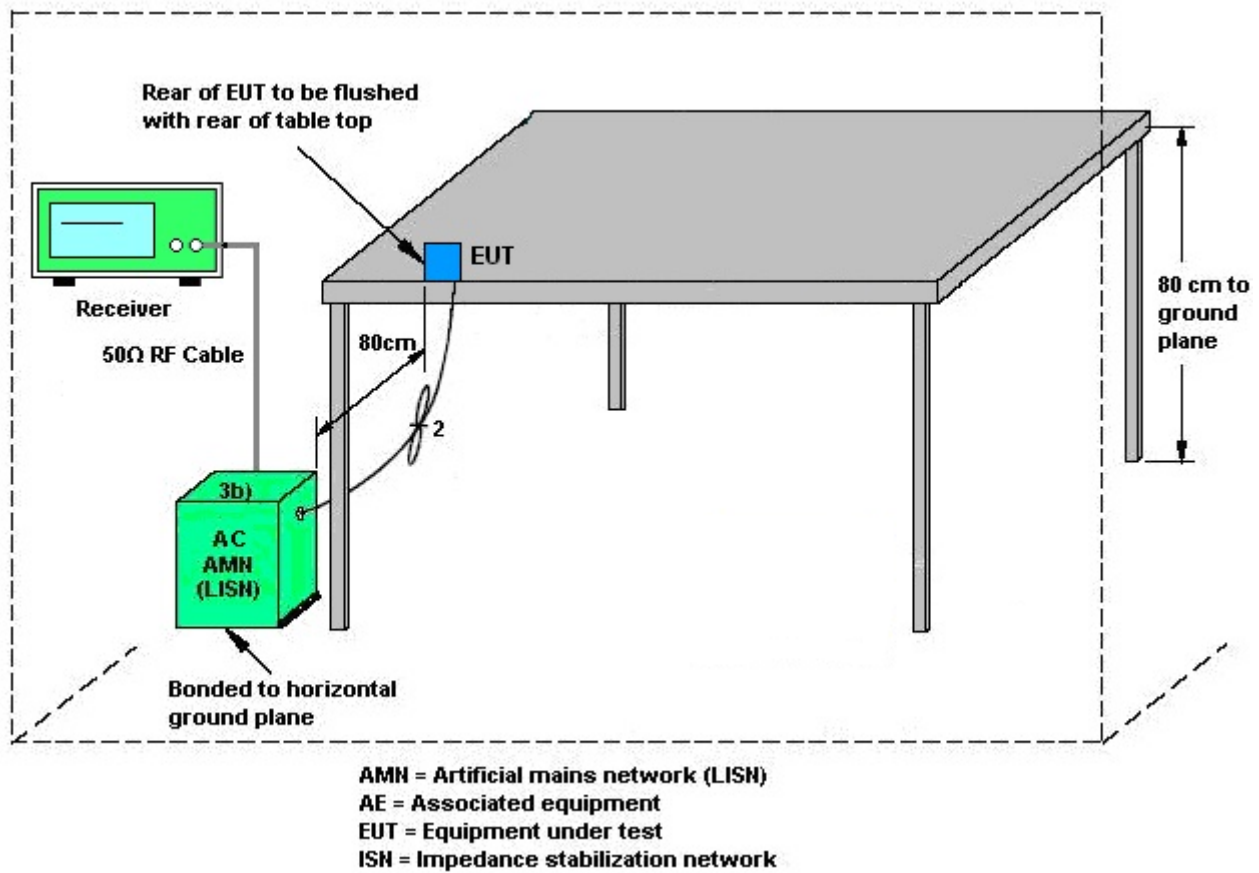

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Feb. 09, 2025~ Feb. 10, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2025	Feb. 09, 2025~ Feb. 10, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2025	Feb. 09, 2025~ Feb. 10, 2025	Jan. 01, 2026	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400023	3Hz~8.5GHz; Max 30dBm	Jan. 02, 2025	Feb. 13, 2025	Jan. 01, 2026	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471084	10Hz~44GHz	Jul. 04, 2024	Feb. 13, 2025	Jul. 03, 2025	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Feb. 13, 2025	Sep. 07, 2025	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Sep. 03, 2024	Feb. 13, 2025	Sep. 02, 2025	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 11, 2024	Feb. 13, 2025	Apr. 10, 2025	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101116	18GHz~40GHz	Oct. 22, 2024	Feb. 13, 2025	Oct. 21, 2025	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9KHz ~1GHZ	Jul. 04, 2024	Feb. 13, 2025	Jul. 03, 2025	Radiation (03CH06-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 03, 2025	Feb. 13, 2025	Jan. 02, 2026	Radiation (03CH06-KS)
high gain Amplifier	EM	EM01G18GA	060845	1Ghz~18Ghz	Jan. 03, 2025	Feb. 13, 2025	Jan. 02, 2026	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY57280119	500MHz~26.5GHz	Oct. 09, 2024	Feb. 13, 2025	Oct. 08, 2025	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Feb. 13, 2025	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Feb. 13, 2025	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Feb. 13, 2025	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 18, 2024	Jan. 23, 2025	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Jan. 23, 2025	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Jan. 23, 2025	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Jan. 23, 2025	Oct. 08, 2025	Conduction (CO01-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2020. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Denstiy	±0.90 dB
Frequency	0.04 ppm

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84dB
---	--------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.06dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.18dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.38dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results




DTS Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
ZIGBEE	Ant2	2405	1.46	2404.26	2405.72	0.5	PASS
		2445	1.50	2444.23	2445.72	0.5	PASS
		2455	1.28	2454.26	2455.53	0.5	PASS
		2465	1.47	2464.23	2465.70	0.5	PASS
		2475	1.53	2474.21	2475.74	0.5	PASS




Test Graphs

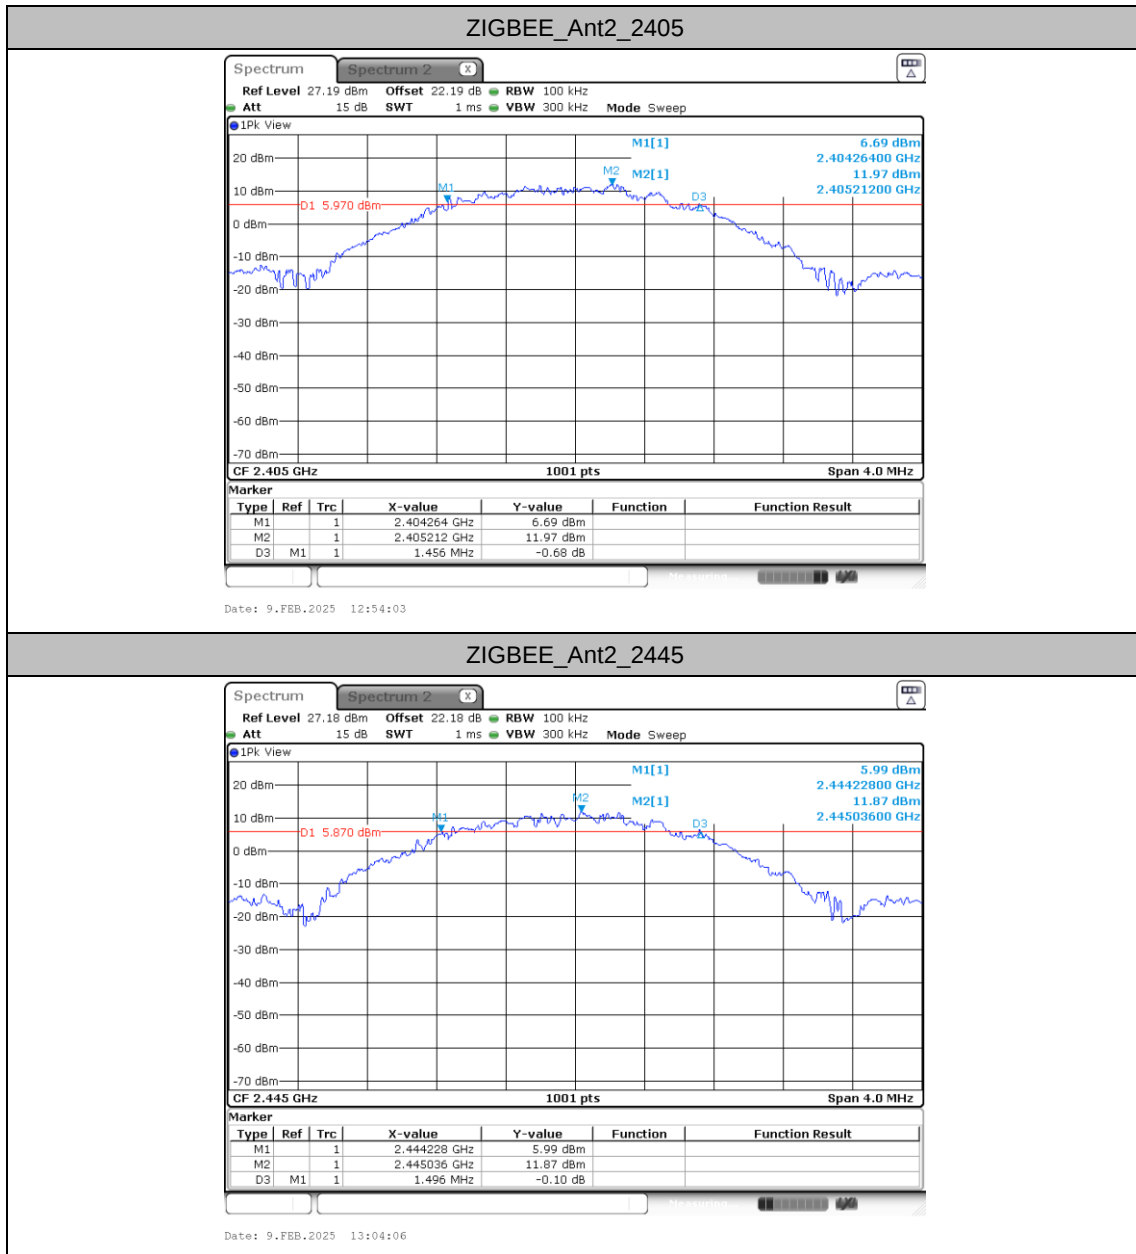





ZIGBEE_Ant2_2455

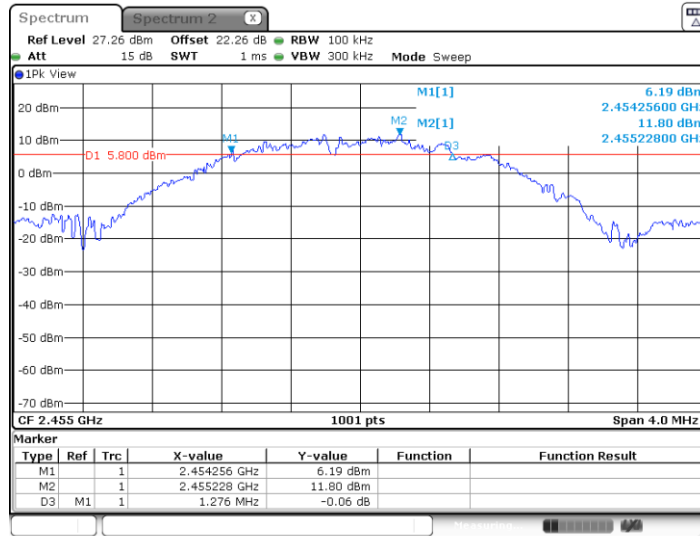

ZIGBEE_Ant2_2465

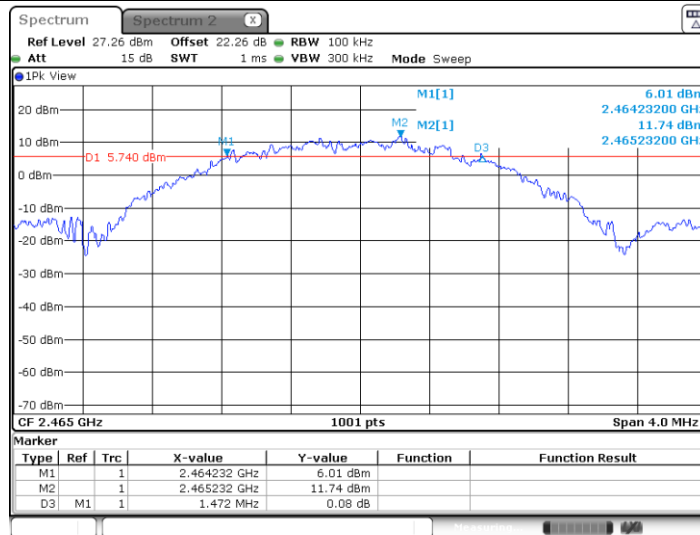

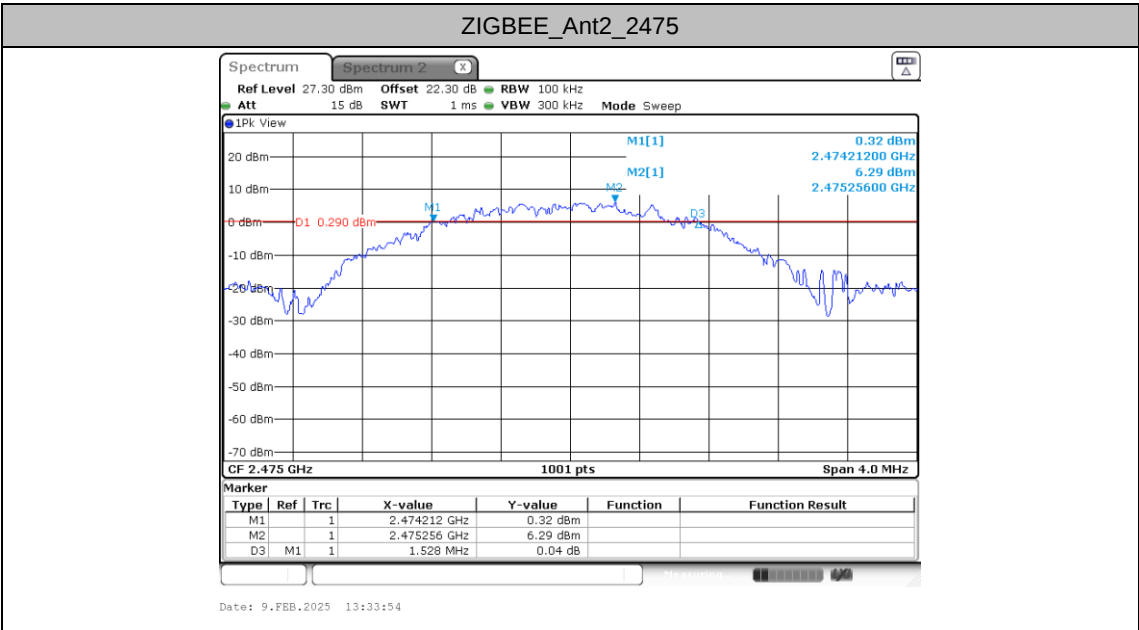




Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
ZIGBEE	Ant2	2405	2.218	2403.8571	2406.0749	---	---
		2445	2.262	2443.8412	2446.1029	---	---
		2455	2.246	2453.8492	2456.0949	---	---
		2465	2.258	2463.8412	2466.0989	---	---
		2475	2.274	2473.8492	2476.1229	---	---




Test Graphs

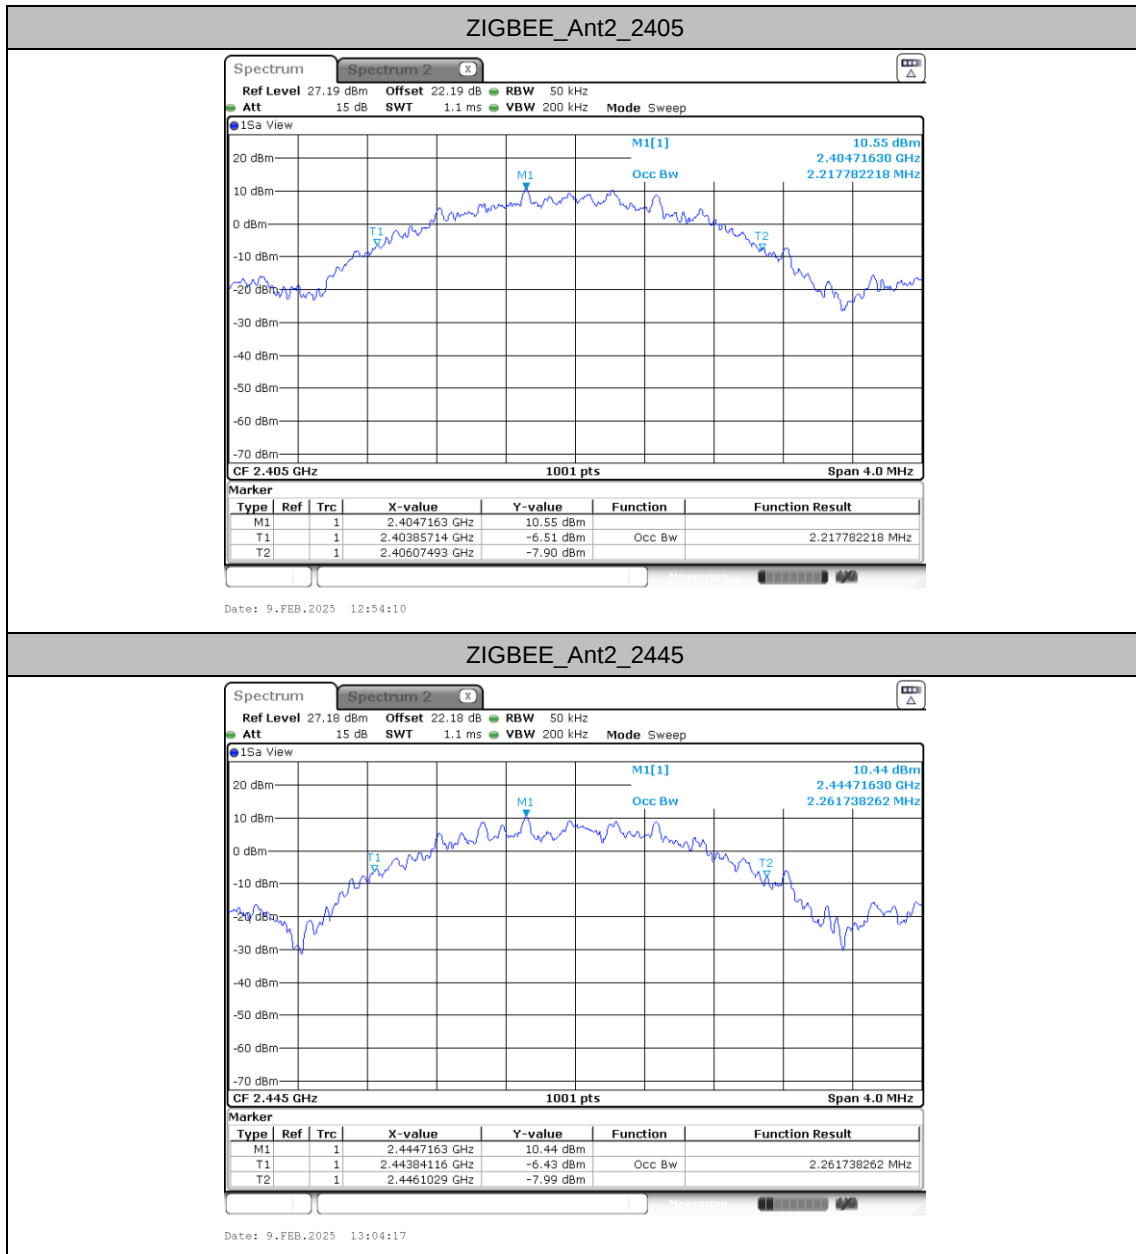




ZIGBEE_Ant2_2455

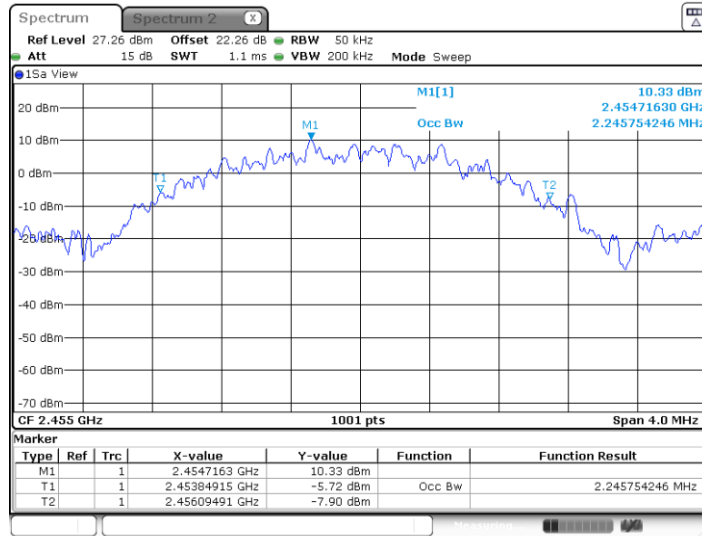


Date: 9.FEB.2025 13:26:28

ZIGBEE_Ant2_2465

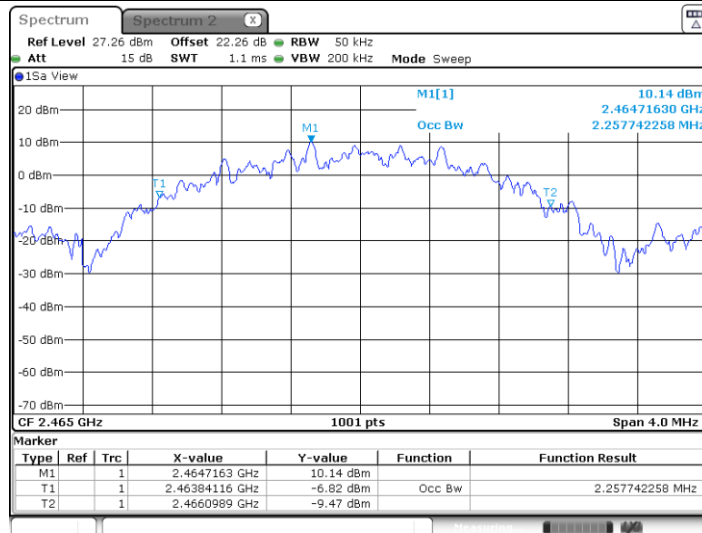

Date: 9.FEB.2025 13:31:39

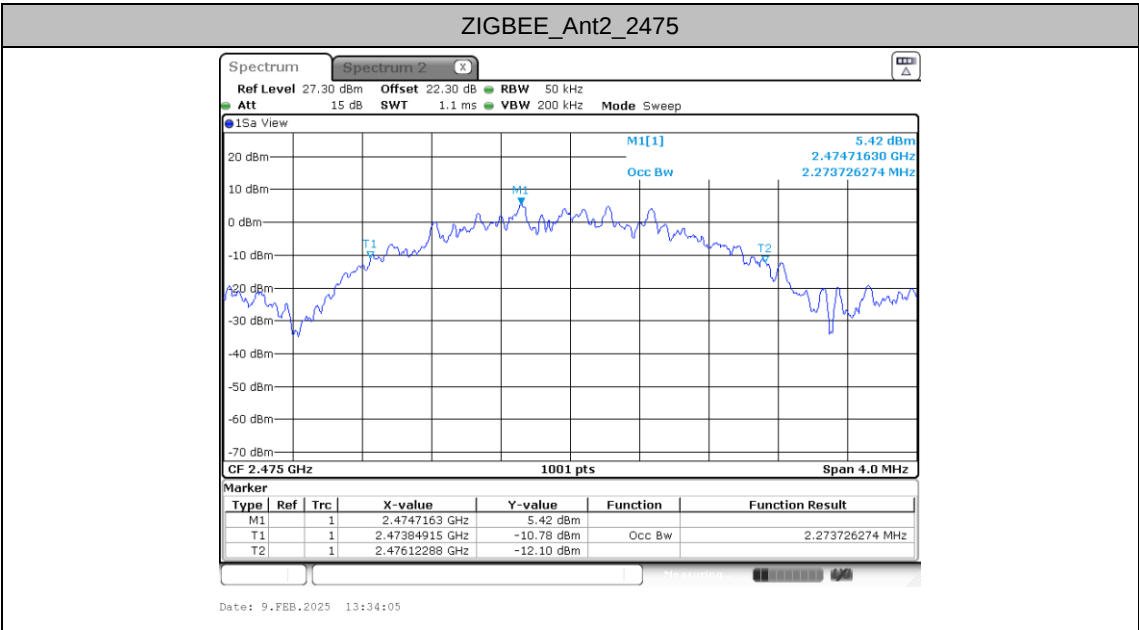



Maximum conducted output power

Test Result Peak

TestMode	Antenna	CH.	Peak Conducted Power (dBm)	Conducted Power Limit	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit	Pass/Fail
ZIGBEE	Ant2	11	15.65	30.00	0	15.65	36.00	Pass
		19	15.58	30.00	0	15.58	36.00	Pass
		21	15.61	30.00	0	15.61	36.00	Pass
		23	15.62	30.00	0	15.62	36.00	Pass
		25	10.56	30.00	0	10.56	36.00	Pass

Test Result Average

TestMode	Antenna	CH.	Duty Factor (dB)	Average Conducted Power (dBm)	Power setting
ZIGBEE	Ant2	11	12.92	15.55	000C
		19	12.92	15.54	000C
		21	12.92	15.51	000C
		23	12.92	15.57	000C
		25	12.92	10.51	000E




Maximum power spectral density

Test Result

TestMode	Antenna	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
ZIGBEE	Ant2	2405	5.29	≤8.00	PASS
		2445	5.15	≤8.00	PASS
		2455	4.62	≤8.00	PASS
		2465	5.05	≤8.00	PASS
		2475	0.14	≤8.00	PASS




Test Graphs

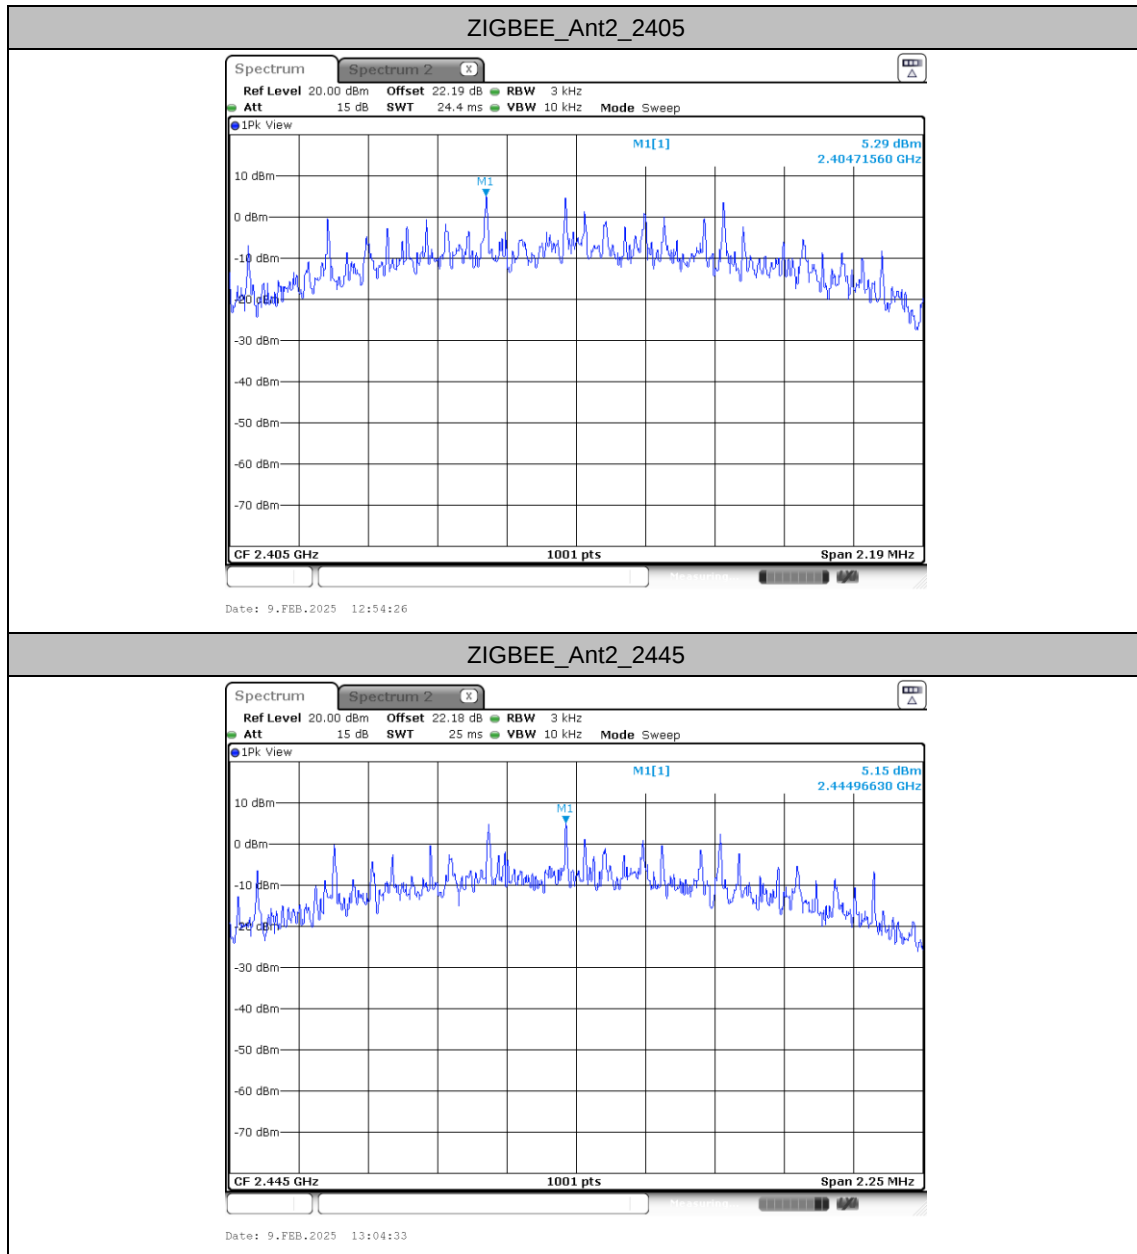





ZIGBEE_Ant2_2455

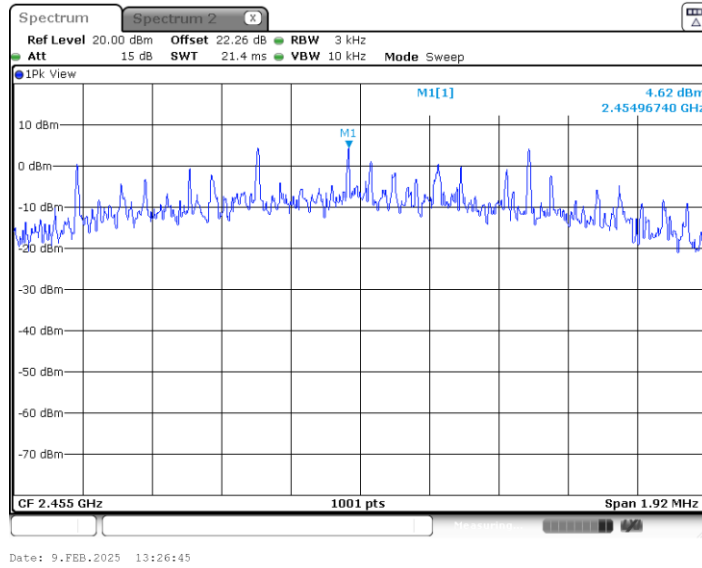

ZIGBEE_Ant2_2465

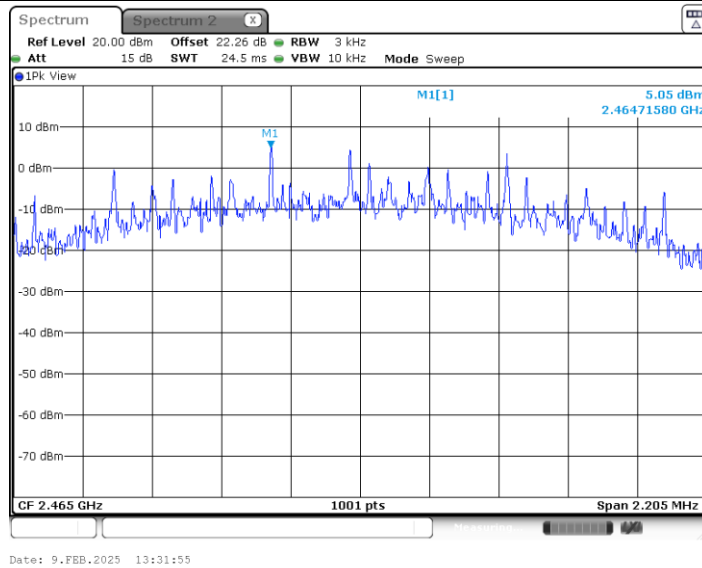

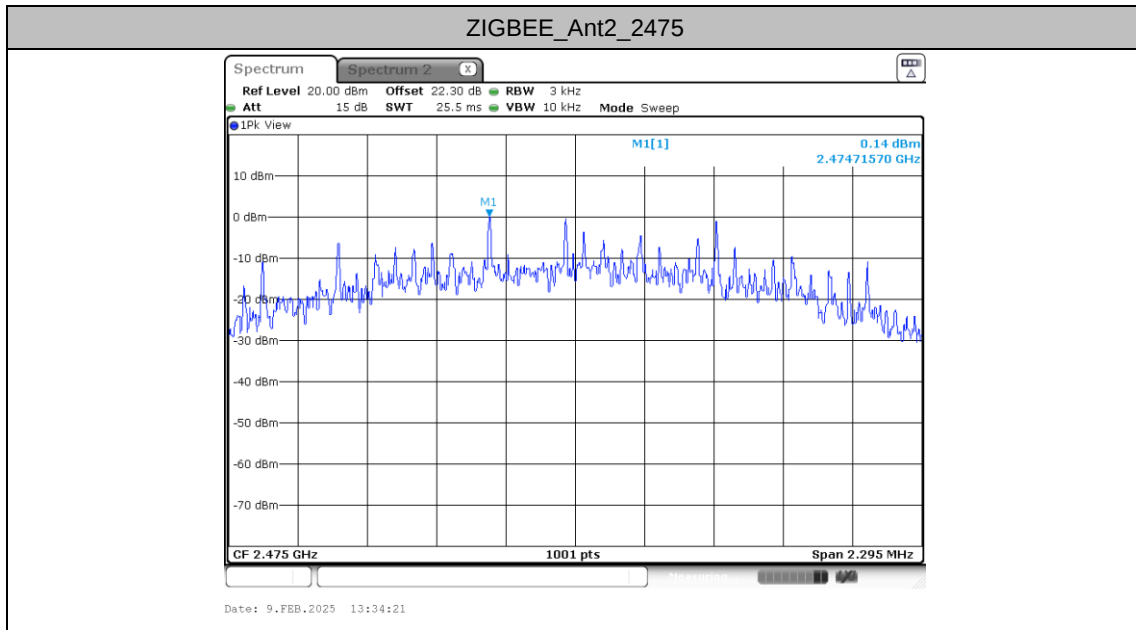



Reference level measurement

Test Result

TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm/100KHz]
ZIGBEE	Ant2	2405	2405.21	11.85
		2445	2445.23	12.04
		2455	2455.22	11.69
		2465	2465.24	11.62
		2475	2475.24	6.76




Test Graphs







ZIGBEE_Ant2_2455

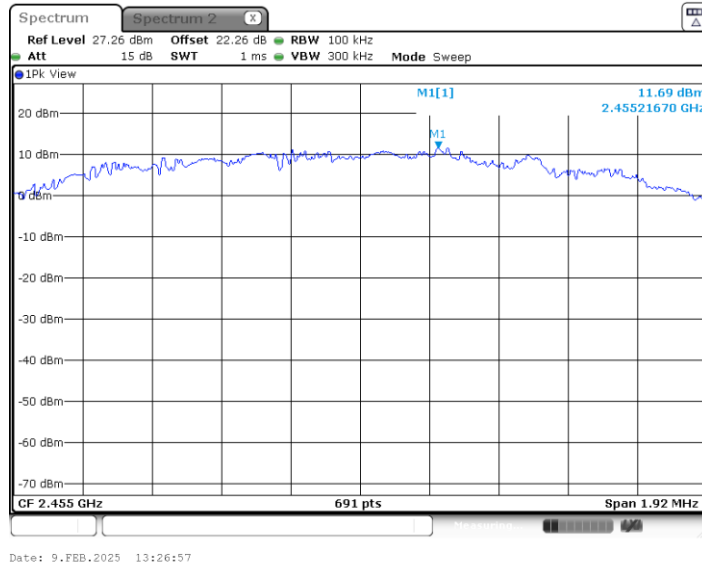

ZIGBEE_Ant2_2465

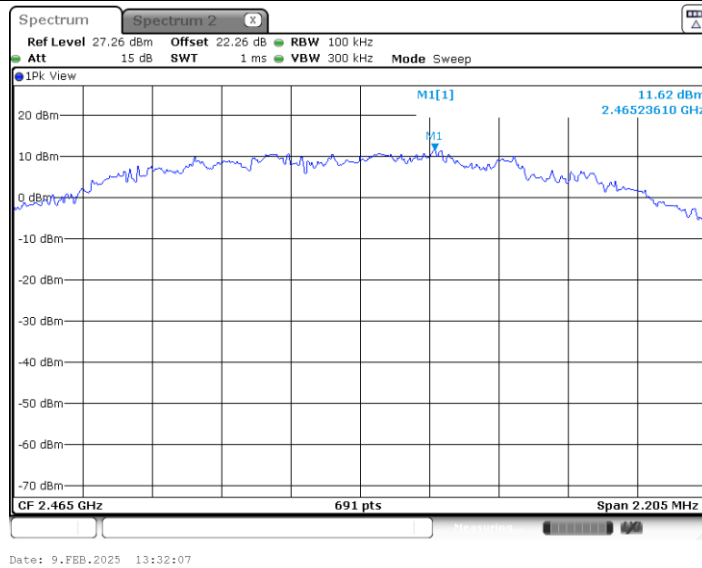

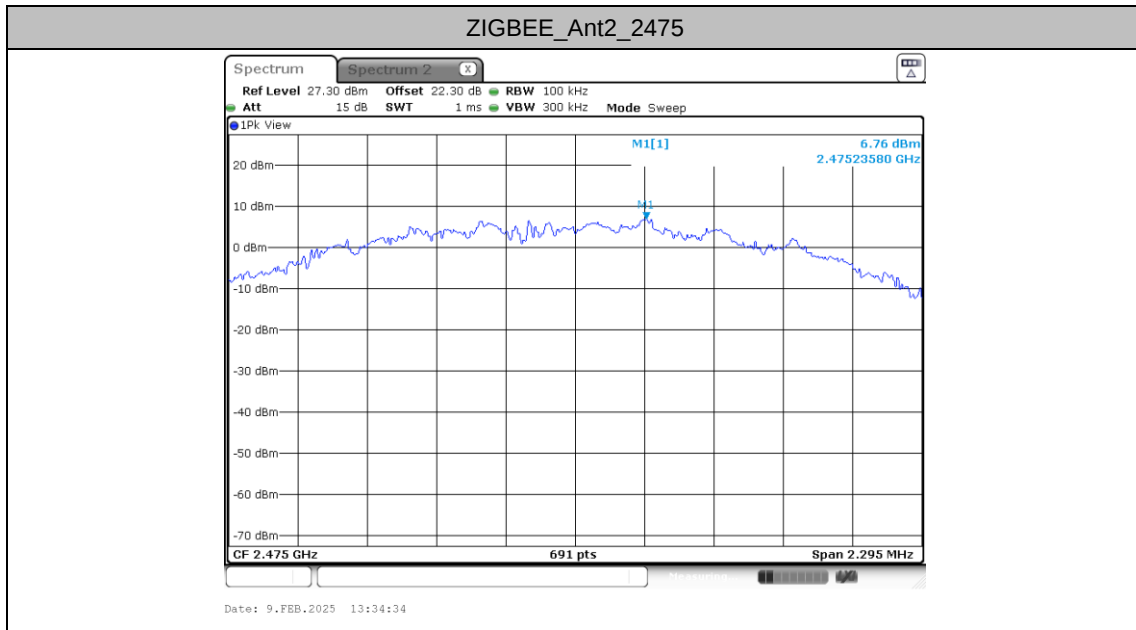




Band edge measurements

Test Result

TestMode	Antenna	ChName	Freq(MHz)	RefLevel[dBm /100KHz]	Result[dBm /100KHz]	Limit[dBm /100KHz]	Verdict
ZIGBEE	Ant2	Low	2405	11.85	-30	≤-8.15	PASS
		High	2455	11.69	-46.3	≤-8.31	PASS
			2465	11.62	-44.42	≤-8.38	PASS
			2475	6.76	-41.1	≤-13.24	PASS




Test Graphs

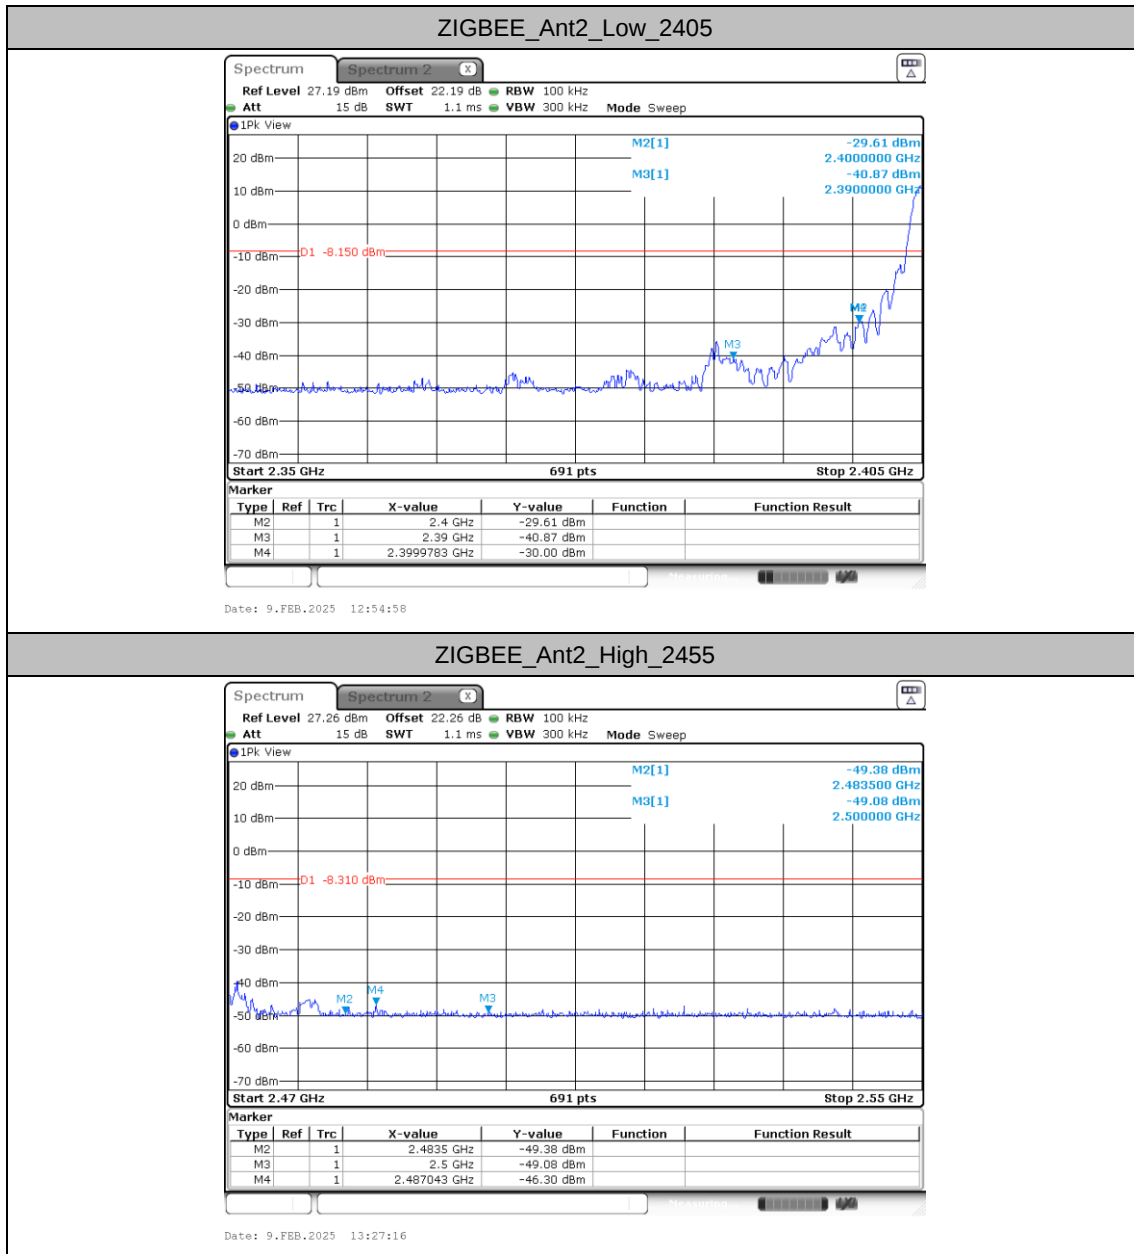




ZIGBEE_Ant2_High_2465

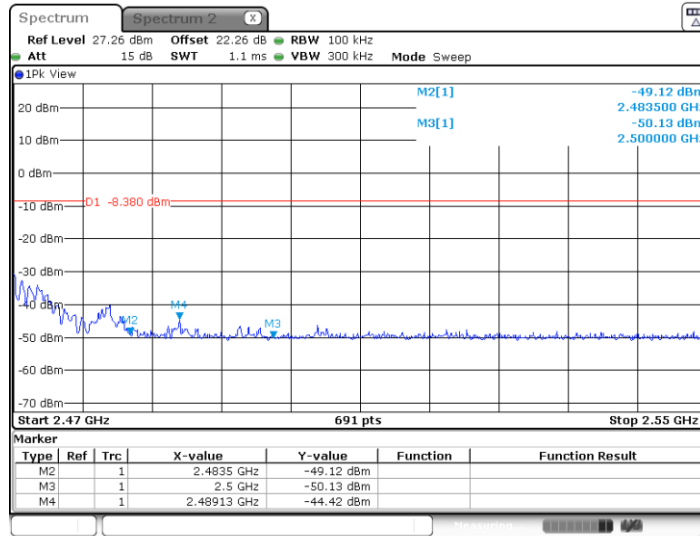

ZIGBEE_Ant2_High_2475

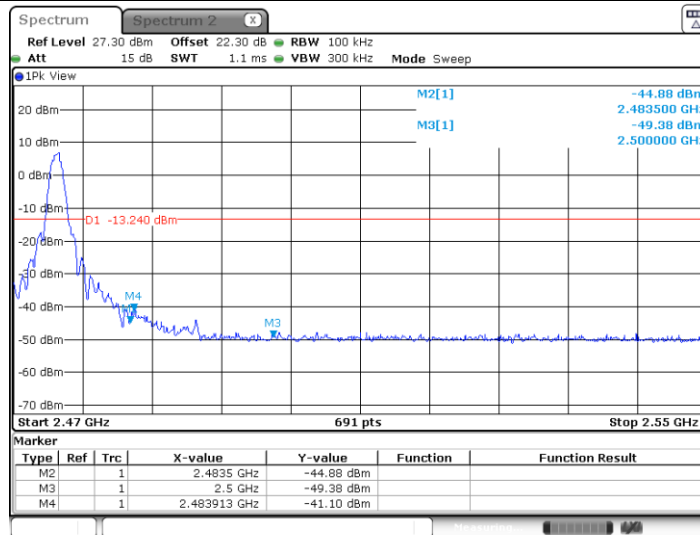




Conducted Spurious Emission

Test Result

TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
ZIGBEE	Ant2	2405	30~1000	11.85	-49.92	≤-8.15	PASS
			1000~26500	11.85	-43.93	≤-8.15	PASS
		2445	30~1000	12.04	-49.63	≤-7.96	PASS
			1000~26500	12.04	-43.99	≤-7.96	PASS
		2455	30~1000	11.69	-49.63	≤-8.31	PASS
			1000~26500	11.69	-44.36	≤-8.31	PASS
		2465	30~1000	11.62	-49.29	≤-8.38	PASS
			1000~26500	11.62	-43.9	≤-8.38	PASS
		2475	30~1000	6.76	-49.04	≤-13.24	PASS
			1000~26500	6.76	-43.35	≤-13.24	PASS




Test Graphs

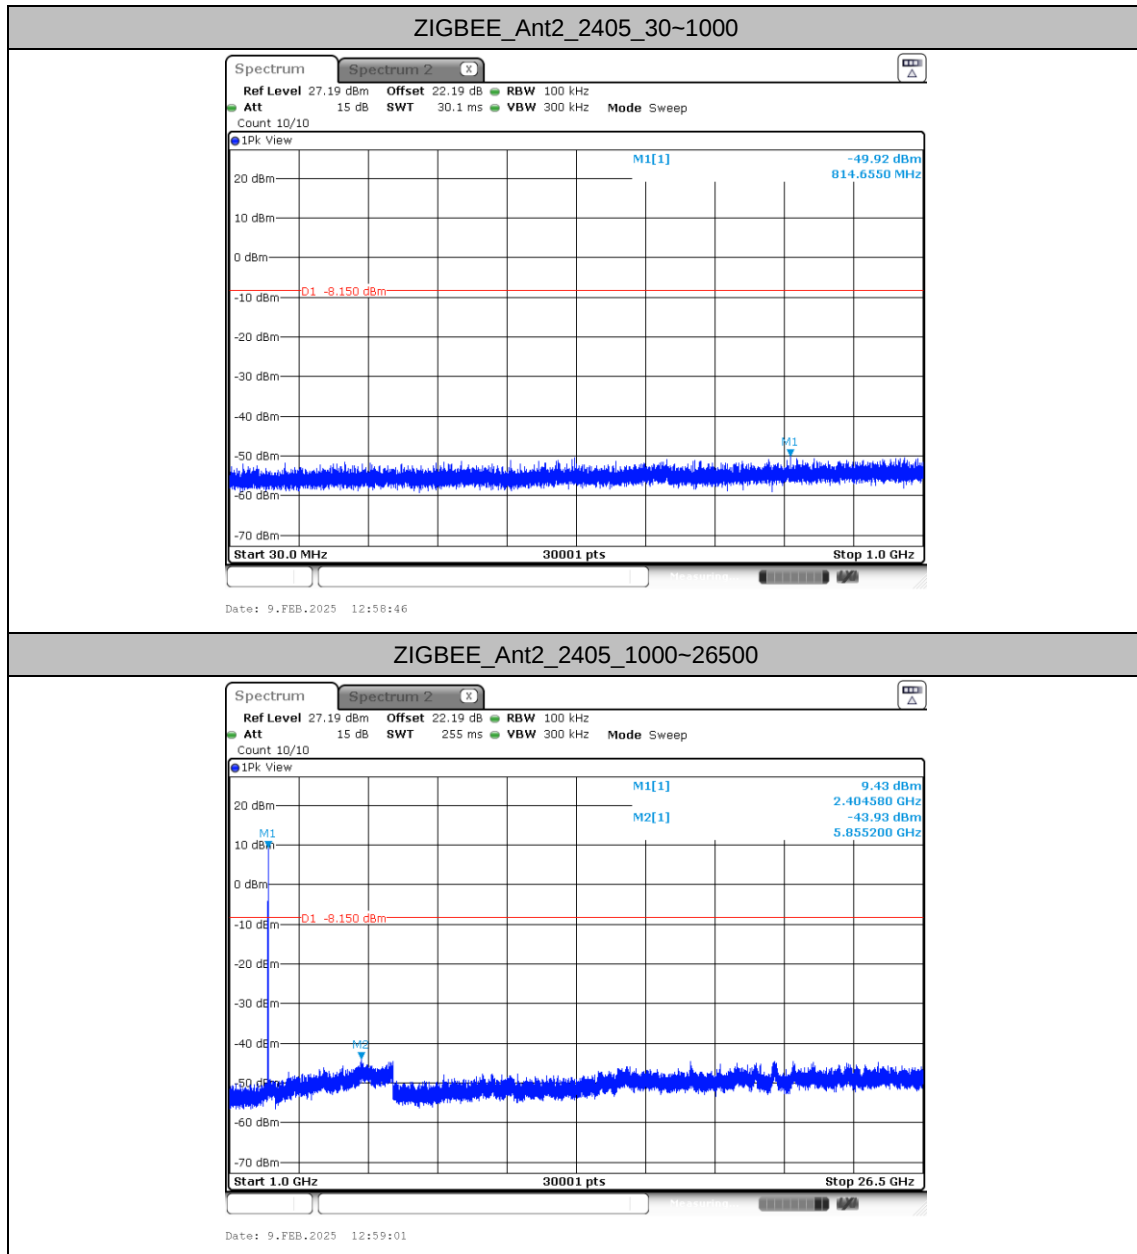




ZIGBEE_Ant2_2445_30~1000

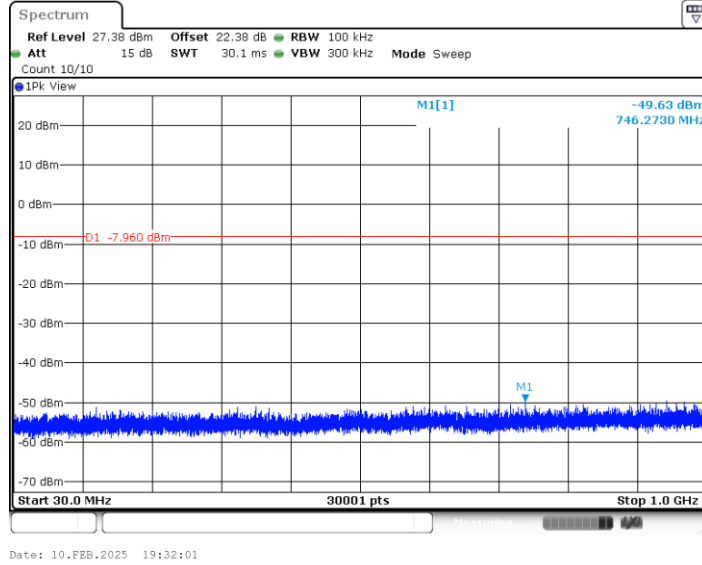


ZIGBEE_Ant2_2445_1000~26500

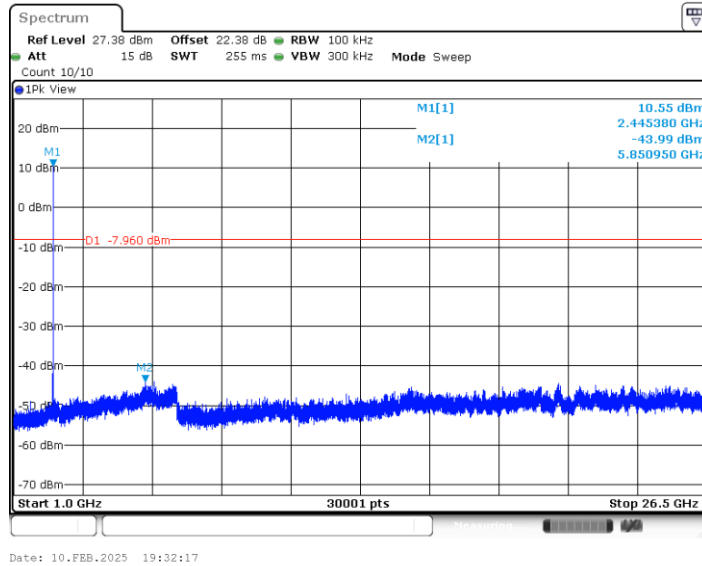




ZIGBEE_Ant2_2455_30~1000

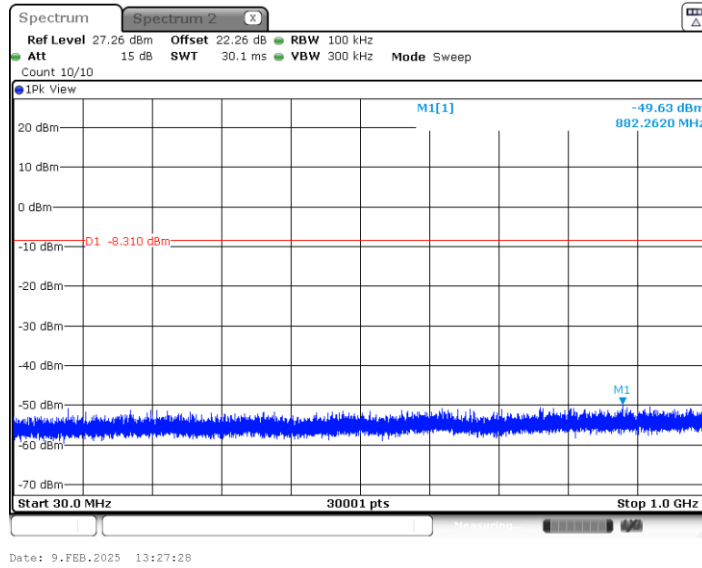


ZIGBEE_Ant2_2455_1000~26500

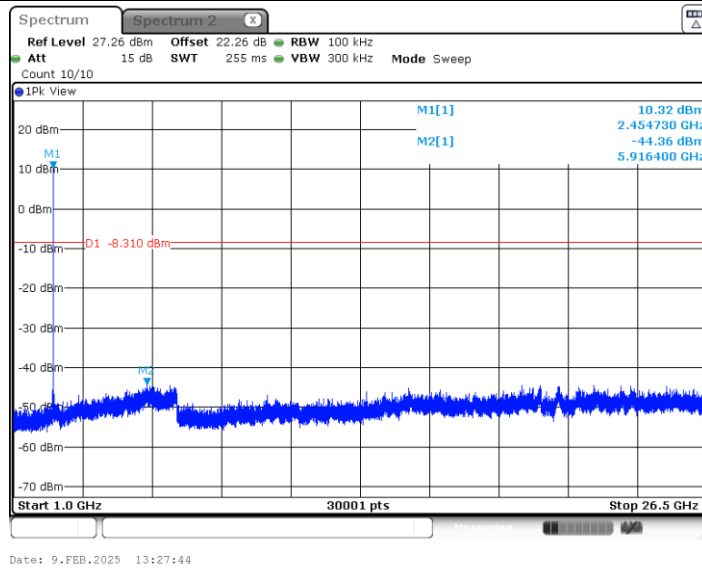




ZIGBEE_Ant2_2465_30~1000

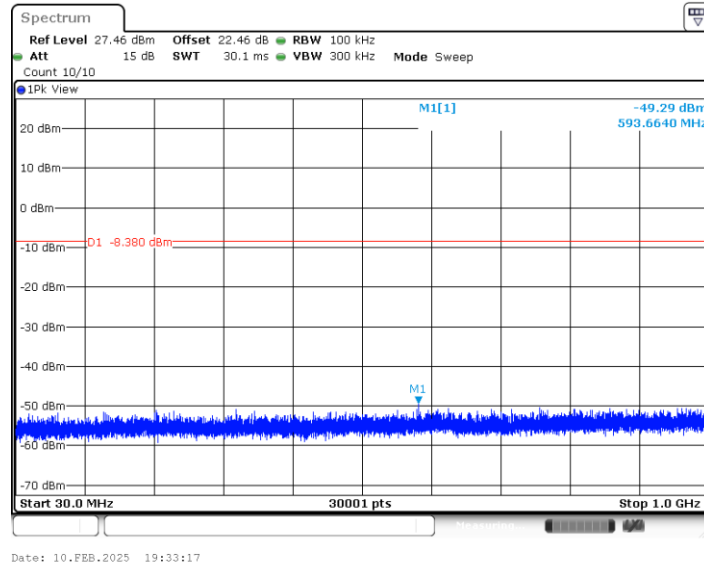


ZIGBEE_Ant2_2465_1000~26500

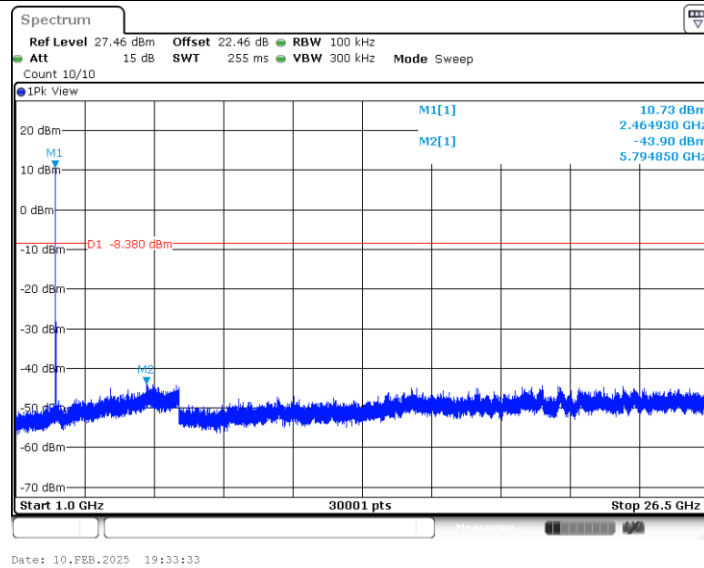




ZIGBEE_Ant2_2475_30~1000

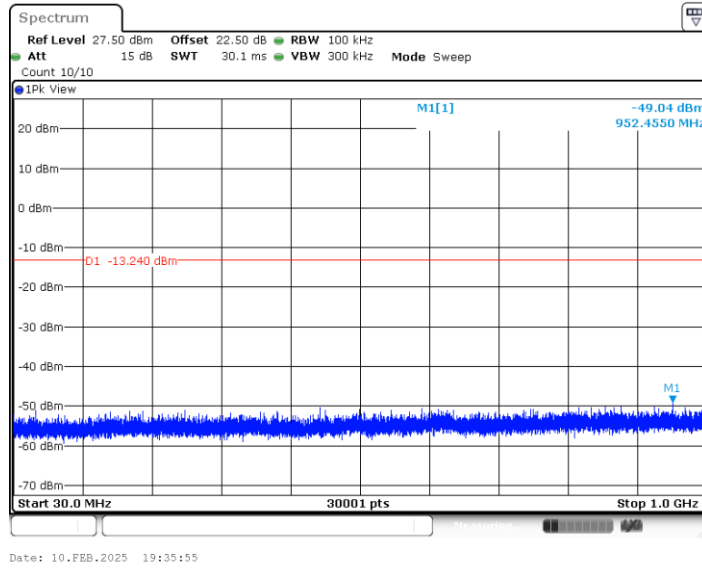


ZIGBEE_Ant2_2475_1000~26500

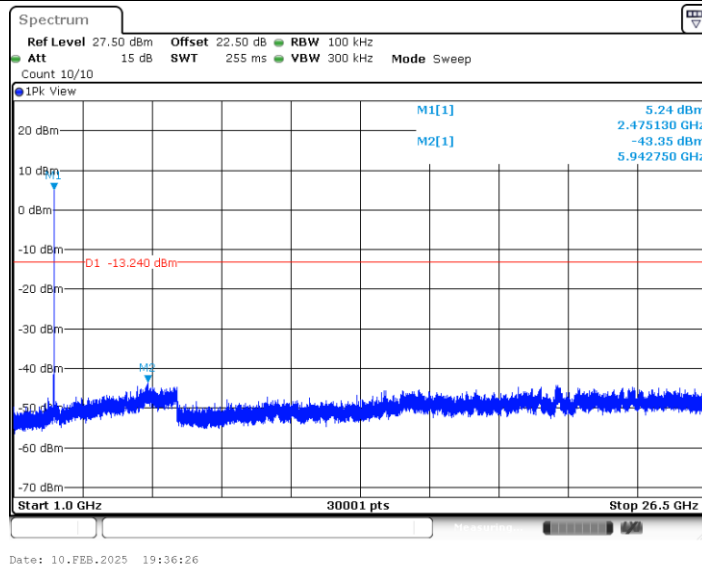



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

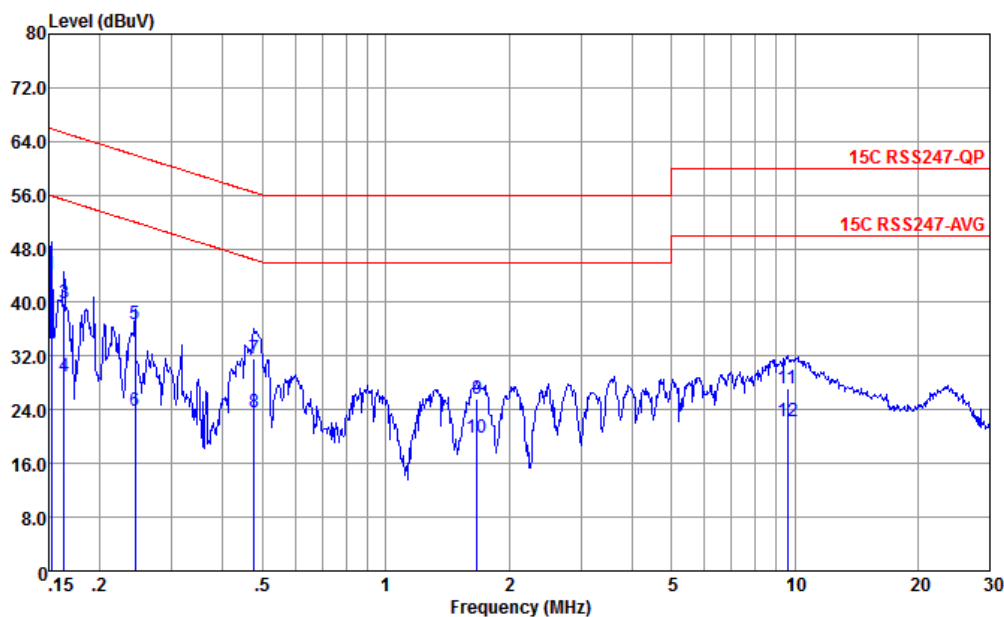


Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-L 2024 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1 *	0.152	44.17	-21.70	65.87	33.60	0.12	10.45	QP
2	0.152	33.87	-22.00	55.87	23.30	0.12	10.45	Average
3	0.163	39.86	-25.44	65.30	29.30	0.11	10.45	QP
4	0.163	28.86	-26.44	55.30	18.30	0.11	10.45	Average
5	0.244	36.85	-25.10	61.95	26.29	0.09	10.47	QP
6	0.244	23.85	-28.10	51.95	13.29	0.09	10.47	Average
7	0.476	31.64	-24.77	56.41	21.30	-0.09	10.43	QP
8	0.476	23.64	-22.77	46.41	13.30	-0.09	10.43	Average
9	1.671	25.64	-30.36	56.00	15.60	-0.21	10.25	QP
10	1.671	19.94	-26.06	46.00	9.90	-0.21	10.25	Average
11	9.603	27.19	-32.81	60.00	17.20	-0.24	10.23	QP
12	9.603	22.29	-27.71	50.00	12.30	-0.24	10.23	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

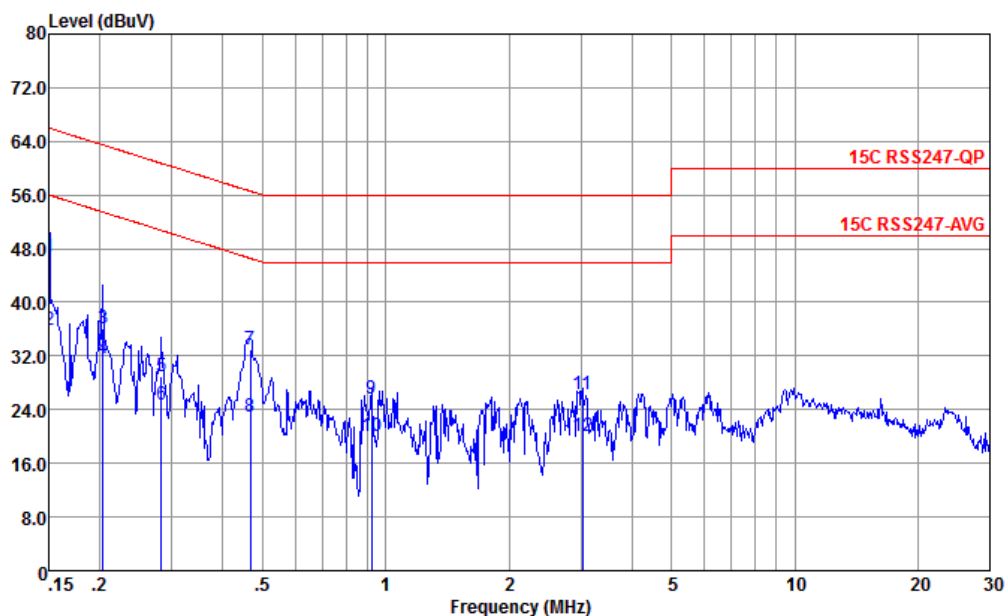

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-N 2024 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.150	46.87	-19.13	66.00	36.30	0.12	10.45	QP
2	0.150	35.87	-20.13	56.00	25.30	0.12	10.45	Average
3	0.204	36.18	-27.27	63.45	25.61	0.11	10.46	QP
4	0.204	31.68	-21.77	53.45	21.11	0.11	10.46	Average
5	0.283	28.99	-31.73	60.72	18.59	-0.08	10.48	QP
6	0.283	24.71	-26.01	50.72	14.31	-0.08	10.48	Average
7	0.466	33.09	-23.49	56.58	22.81	-0.15	10.43	QP
8	0.466	22.89	-23.69	46.58	12.61	-0.15	10.43	Average
9	0.923	25.71	-30.29	56.00	15.61	-0.18	10.28	QP
10	0.923	20.01	-25.99	46.00	9.91	-0.18	10.28	Average
11	3.025	26.31	-29.69	56.00	16.30	-0.21	10.22	QP
12	3.025	20.11	-25.89	46.00	10.10	-0.21	10.22	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Jerry Xu	Relative Humidity :	41 ~ 42 %
		Temperature :	22 ~ 23 °C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	Remark
Mode 1	2400-2483.5	2	Zigbee	11	2405	250kbps	-
Mode 2	2400-2483.5	2	Zigbee	19	2445	250kbps	-
Mode 3	2400-2483.5	2	Zigbee	25	2475	250kbps	-
Mode 4	2400-2483.5	2	Zigbee	23	2465	250kbps	-
Mode 5	2400-2483.5	2	Zigbee	21	2455	250kbps	-



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Zigbee	11	2388.65	71.32	74.00	-2.68	H	PEAK	Pass	Band Edge
	Zigbee	11	4810.00	51.67	54.00	-2.33	V	AVERAGE	Pass	Harmonic
2	Zigbee	19	2485.54	64.37	74.00	-9.63	H	PEAK	Pass	Band Edge
	Zigbee	19	7335.00	53.96	54.00	-0.04	V	AVERAGE	Pass	Harmonic
3	Zigbee	25	2484.82	72.27	74.00	-1.73	H	PEAK	Pass	Band Edge
	Zigbee	25	4948.50	46.56	74.00	-27.44	V	Peak	Pass	Harmonic
4	Zigbee	23	2489.32	68.96	74.00	-5.04	H	PEAK	Pass	Band Edge
	Zigbee	23	7395.00	52.65	54.00	-1.35	V	AVERAGE	Pass	Harmonic
5	Zigbee	21	2488.00	68.20	74.00	-5.80	H	PEAK	Pass	Band Edge
	Zigbee	21	4910.00	48.22	54.00	-5.78	V	AVERAGE	Pass	Harmonic



Mode	1																																																																							
	Band Edge																																																																							
	2400-2483.5_Zigbee_CH11_2405MHz																																																																							
ANT	2																																																																							
Pol.	Horizontal						Fundamental																																																																	
Peak																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2388.65</td><td>71.32</td><td>74.00</td><td>-2.68</td><td>63.08</td><td>32.19</td><td>7.10</td><td>37.05</td><td>6.00</td><td>137</td><td>109 PEAK</td></tr><tr><td>2</td><td>2388.65</td><td>45.39</td><td>54.00</td><td>-8.61</td><td>37.15</td><td>32.19</td><td>7.10</td><td>37.05</td><td>6.00</td><td>137</td><td>109 AVERAGE</td></tr></tbody></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2388.65	71.32	74.00	-2.68	63.08	32.19	7.10	37.05	6.00	137	109 PEAK	2	2388.65	45.39	54.00	-8.61	37.15	32.19	7.10	37.05	6.00	137	109 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																														
1	2388.65	71.32	74.00	-2.68	63.08	32.19	7.10	37.05	6.00	137	109 PEAK																																																													
2	2388.65	45.39	54.00	-8.61	37.15	32.19	7.10	37.05	6.00	137	109 AVERAGE																																																													
<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2405.00</td><td>112.36</td><td>-----</td><td>-----</td><td>103.95</td><td>32.31</td><td>7.13</td><td>37.03</td><td>6.00</td><td>137</td><td>109 PEAK</td></tr><tr><td>2</td><td>2405.00</td><td>86.43</td><td>-----</td><td>-----</td><td>78.02</td><td>32.31</td><td>7.13</td><td>37.03</td><td>6.00</td><td>137</td><td>109 AVERAGE</td></tr></tbody></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2405.00	112.36	-----	-----	103.95	32.31	7.13	37.03	6.00	137	109 PEAK	2	2405.00	86.43	-----	-----	78.02	32.31	7.13	37.03	6.00	137	109 AVERAGE	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																														
1	2405.00	112.36	-----	-----	103.95	32.31	7.13	37.03	6.00	137	109 PEAK																																																													
2	2405.00	86.43	-----	-----	78.02	32.31	7.13	37.03	6.00	137	109 AVERAGE																																																													

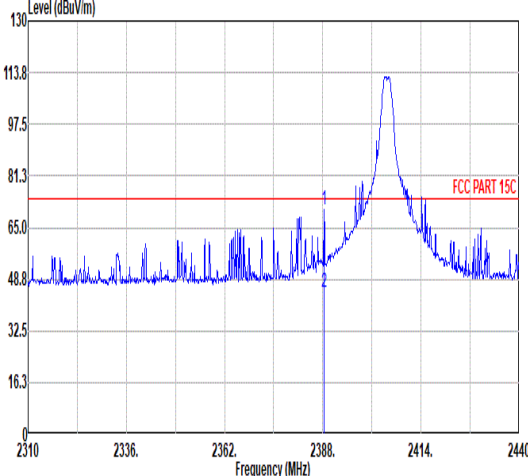
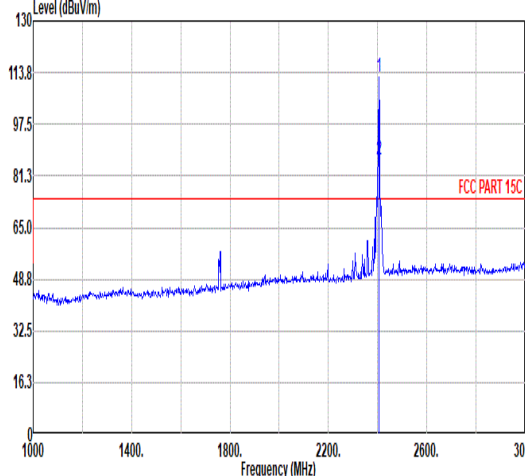


Mode	1																																																																			
	Band Edge																																																																			
	2400-2483.5_Zigbee_CH11_2405MHz																																																																			
ANT	2																																																																			
Pol.	Vertical																																																																			
Peak																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.39</td><td>70.49</td><td>74.00</td><td>-3.51</td><td>62.26</td><td>32.18</td><td>7.10</td><td>37.05</td><td>6.00</td><td>268</td><td>96 PEAK</td></tr><tr><td>2</td><td>2388.39</td><td>44.56</td><td>54.00</td><td>-9.44</td><td>36.33</td><td>32.18</td><td>7.10</td><td>37.05</td><td>6.00</td><td>268</td><td>96 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2388.39	70.49	74.00	-3.51	62.26	32.18	7.10	37.05	6.00	268	96 PEAK	2	2388.39	44.56	54.00	-9.44	36.33	32.18	7.10	37.05	6.00	268	96 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																										
1	2388.39	70.49	74.00	-3.51	62.26	32.18	7.10	37.05	6.00	268	96 PEAK																																																									
2	2388.39	44.56	54.00	-9.44	36.33	32.18	7.10	37.05	6.00	268	96 AVERAGE																																																									
Fundamental																																																																				
Peak																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2405.00</td><td>112.38</td><td>-----</td><td>103.97</td><td>32.31</td><td>7.13</td><td>37.03</td><td>6.00</td><td>268</td><td>96 PEAK</td></tr><tr><td>2</td><td>2405.00</td><td>86.45</td><td>-----</td><td>78.04</td><td>32.31</td><td>7.13</td><td>37.03</td><td>6.00</td><td>268</td><td>96 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2405.00	112.38	-----	103.97	32.31	7.13	37.03	6.00	268	96 PEAK	2	2405.00	86.45	-----	78.04	32.31	7.13	37.03	6.00	268	96 AVERAGE		
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																										
1	2405.00	112.38	-----	103.97	32.31	7.13	37.03	6.00	268	96 PEAK																																																										
2	2405.00	86.45	-----	78.04	32.31	7.13	37.03	6.00	268	96 AVERAGE																																																										



Mode	1																																																																																																																							
	Harmonic																																																																																																																							
	2400-2483.5_Zigbee_CH11_2405MHz																																																																																																																							
ANT	2																																																																																																																							
Pol.	Horizontal																																																																																																																							
Peak Avg																																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4810.00</td><td>55.19</td><td>74.00</td><td>-18.81</td><td>76.38</td><td>34.08</td><td>10.21</td><td>65.48</td><td>0.00</td><td>100</td><td>4 PEAK</td></tr><tr><td>2 4810.00</td><td>51.00</td><td>54.00</td><td>-3.00</td><td>72.19</td><td>34.08</td><td>10.21</td><td>65.48</td><td>0.00</td><td>100</td><td>4 AVERAGE</td></tr><tr><td>3 7213.00</td><td>56.06</td><td>88.05</td><td>-31.99</td><td>73.69</td><td>35.70</td><td>12.71</td><td>66.04</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>4 9622.00</td><td>50.08</td><td>88.05</td><td>-37.97</td><td>65.51</td><td>36.70</td><td>14.93</td><td>67.06</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>5 12025.00</td><td>52.48</td><td>74.00</td><td>-21.52</td><td>63.47</td><td>38.62</td><td>16.70</td><td>66.31</td><td>0.00</td><td>100</td><td>4 PEAK</td></tr><tr><td>6 12025.00</td><td>48.25</td><td>54.00</td><td>-5.75</td><td>59.22</td><td>38.63</td><td>16.70</td><td>66.30</td><td>0.00</td><td>100</td><td>4 AVERAGE</td></tr><tr><td>7 14427.00</td><td>58.52</td><td>88.05</td><td>-29.53</td><td>65.70</td><td>39.13</td><td>18.32</td><td>64.63</td><td>0.00</td><td>---</td><td>--- Peak</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 4810.00	55.19	74.00	-18.81	76.38	34.08	10.21	65.48	0.00	100	4 PEAK	2 4810.00	51.00	54.00	-3.00	72.19	34.08	10.21	65.48	0.00	100	4 AVERAGE	3 7213.00	56.06	88.05	-31.99	73.69	35.70	12.71	66.04	0.00	---	--- Peak	4 9622.00	50.08	88.05	-37.97	65.51	36.70	14.93	67.06	0.00	---	--- Peak	5 12025.00	52.48	74.00	-21.52	63.47	38.62	16.70	66.31	0.00	100	4 PEAK	6 12025.00	48.25	54.00	-5.75	59.22	38.63	16.70	66.30	0.00	100	4 AVERAGE	7 14427.00	58.52	88.05	-29.53	65.70	39.13	18.32	64.63	0.00	---
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																														
1 4810.00	55.19	74.00	-18.81	76.38	34.08	10.21	65.48	0.00	100	4 PEAK																																																																																																														
2 4810.00	51.00	54.00	-3.00	72.19	34.08	10.21	65.48	0.00	100	4 AVERAGE																																																																																																														
3 7213.00	56.06	88.05	-31.99	73.69	35.70	12.71	66.04	0.00	---	--- Peak																																																																																																														
4 9622.00	50.08	88.05	-37.97	65.51	36.70	14.93	67.06	0.00	---	--- Peak																																																																																																														
5 12025.00	52.48	74.00	-21.52	63.47	38.62	16.70	66.31	0.00	100	4 PEAK																																																																																																														
6 12025.00	48.25	54.00	-5.75	59.22	38.63	16.70	66.30	0.00	100	4 AVERAGE																																																																																																														
7 14427.00	58.52	88.05	-29.53	65.70	39.13	18.32	64.63	0.00	---	--- Peak																																																																																																														
Pol.	Vertical																																																																																																																							
Peak Avg																																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4810.00</td><td>55.69</td><td>74.00</td><td>-18.31</td><td>76.88</td><td>34.08</td><td>10.21</td><td>65.48</td><td>0.00</td><td>117</td><td>44 PEAK</td></tr><tr><td>2 4810.00</td><td>51.67</td><td>54.00</td><td>-2.33</td><td>72.86</td><td>34.08</td><td>10.21</td><td>65.48</td><td>0.00</td><td>117</td><td>44 AVERAGE</td></tr><tr><td>3 7216.00</td><td>59.04</td><td>82.61</td><td>-23.57</td><td>76.68</td><td>35.70</td><td>12.71</td><td>66.05</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>4 9622.00</td><td>51.42</td><td>82.61</td><td>-31.19</td><td>66.85</td><td>36.70</td><td>14.93</td><td>67.06</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>5 12025.00</td><td>49.33</td><td>74.00</td><td>-24.67</td><td>60.32</td><td>38.62</td><td>16.70</td><td>66.31</td><td>0.00</td><td>117</td><td>44 PEAK</td></tr><tr><td>6 12025.00</td><td>43.17</td><td>54.00</td><td>-10.83</td><td>54.14</td><td>38.63</td><td>16.70</td><td>66.30</td><td>0.00</td><td>117</td><td>44 AVERAGE</td></tr><tr><td>7 14433.00</td><td>54.82</td><td>82.61</td><td>-27.79</td><td>61.99</td><td>39.13</td><td>18.32</td><td>64.62</td><td>0.00</td><td>---</td><td>--- Peak</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 4810.00	55.69	74.00	-18.31	76.88	34.08	10.21	65.48	0.00	117	44 PEAK	2 4810.00	51.67	54.00	-2.33	72.86	34.08	10.21	65.48	0.00	117	44 AVERAGE	3 7216.00	59.04	82.61	-23.57	76.68	35.70	12.71	66.05	0.00	---	--- Peak	4 9622.00	51.42	82.61	-31.19	66.85	36.70	14.93	67.06	0.00	---	--- Peak	5 12025.00	49.33	74.00	-24.67	60.32	38.62	16.70	66.31	0.00	117	44 PEAK	6 12025.00	43.17	54.00	-10.83	54.14	38.63	16.70	66.30	0.00	117	44 AVERAGE	7 14433.00	54.82	82.61	-27.79	61.99	39.13	18.32	64.62	0.00	---
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																														
1 4810.00	55.69	74.00	-18.31	76.88	34.08	10.21	65.48	0.00	117	44 PEAK																																																																																																														
2 4810.00	51.67	54.00	-2.33	72.86	34.08	10.21	65.48	0.00	117	44 AVERAGE																																																																																																														
3 7216.00	59.04	82.61	-23.57	76.68	35.70	12.71	66.05	0.00	---	--- Peak																																																																																																														
4 9622.00	51.42	82.61	-31.19	66.85	36.70	14.93	67.06	0.00	---	--- Peak																																																																																																														
5 12025.00	49.33	74.00	-24.67	60.32	38.62	16.70	66.31	0.00	117	44 PEAK																																																																																																														
6 12025.00	43.17	54.00	-10.83	54.14	38.63	16.70	66.30	0.00	117	44 AVERAGE																																																																																																														
7 14433.00	54.82	82.61	-27.79	61.99	39.13	18.32	64.62	0.00	---	--- Peak																																																																																																														

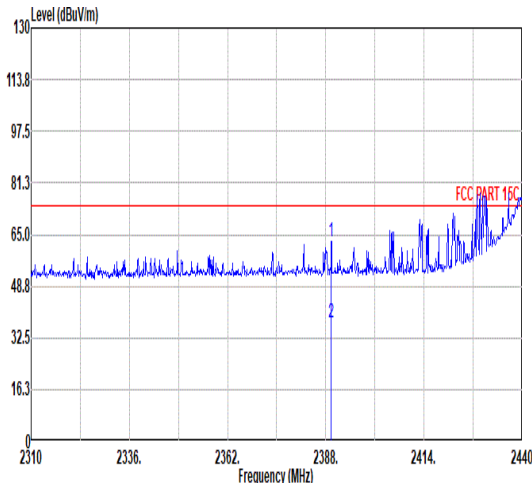
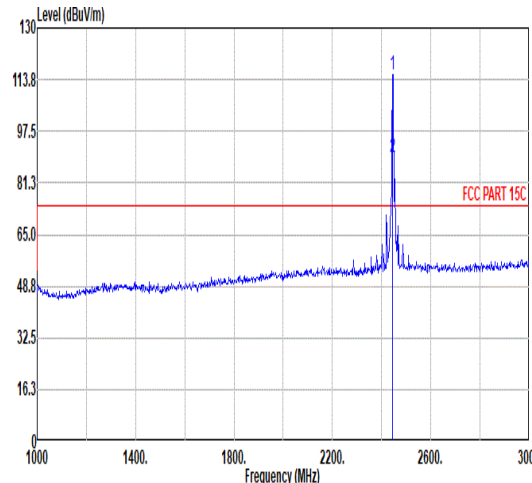


Mode	2																																																																							
	Band Edge - L																																																																							
	2400-2483.5_Zigbee_CH19_2445MHz																																																																							
ANT	2																																																																							
Pol.	Horizontal						Fundamental																																																																	
Peak																																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.43</td><td>62.98</td><td>74.00</td><td>-11.02</td><td>50.09</td><td>32.47</td><td>6.60</td><td>32.18</td><td>6.00</td><td>325</td><td>314 PEAK</td></tr><tr><td>2</td><td>2389.43</td><td>37.05</td><td>54.00</td><td>-16.95</td><td>24.16</td><td>32.47</td><td>6.60</td><td>32.18</td><td>6.00</td><td>325</td><td>314 AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2389.43	62.98	74.00	-11.02	50.09	32.47	6.60	32.18	6.00	325	314 PEAK	2	2389.43	37.05	54.00	-16.95	24.16	32.47	6.60	32.18	6.00	325	314 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																														
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																														
1	2389.43	62.98	74.00	-11.02	50.09	32.47	6.60	32.18	6.00	325	314 PEAK																																																													
2	2389.43	37.05	54.00	-16.95	24.16	32.47	6.60	32.18	6.00	325	314 AVERAGE																																																													
																																																																								
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2445.00</td><td>115.25</td><td>-----</td><td>-----</td><td>102.36</td><td>32.42</td><td>6.68</td><td>32.21</td><td>6.00</td><td>325</td><td>314 PEAK</td></tr><tr><td>2</td><td>2445.00</td><td>89.32</td><td>-----</td><td>-----</td><td>76.43</td><td>32.42</td><td>6.68</td><td>32.21</td><td>6.00</td><td>325</td><td>314 AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2445.00	115.25	-----	-----	102.36	32.42	6.68	32.21	6.00	325	314 PEAK	2	2445.00	89.32	-----	-----	76.43	32.42	6.68	32.21	6.00	325	314 AVERAGE	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																														
1	2445.00	115.25	-----	-----	102.36	32.42	6.68	32.21	6.00	325	314 PEAK																																																													
2	2445.00	89.32	-----	-----	76.43	32.42	6.68	32.21	6.00	325	314 AVERAGE																																																													




Mode	2																																																																			
	Band Edge - R																																																																			
	2400-2483.5_Zigbee_CH19_2445MHz																																																																			
ANT	2																																																																			
Pol.	Horizontal										Fundamental																																																									
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.54</td><td>64.37</td><td>74.00</td><td>-9.63</td><td>51.25</td><td>32.61</td><td>6.74</td><td>32.23</td><td>6.00</td><td>325</td><td>314 PEAK</td></tr><tr><td>2</td><td>2485.54</td><td>38.44</td><td>54.00</td><td>-15.56</td><td>25.32</td><td>32.61</td><td>6.74</td><td>32.23</td><td>6.00</td><td>325</td><td>314 AVERAGE</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.54	64.37	74.00	-9.63	51.25	32.61	6.74	32.23	6.00	325	314 PEAK	2	2485.54	38.44	54.00	-15.56	25.32	32.61	6.74	32.23	6.00	325	314 AVERAGE	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	2485.54	64.37	74.00	-9.63	51.25	32.61	6.74	32.23	6.00	325	314 PEAK																																																									
2	2485.54	38.44	54.00	-15.56	25.32	32.61	6.74	32.23	6.00	325	314 AVERAGE																																																									

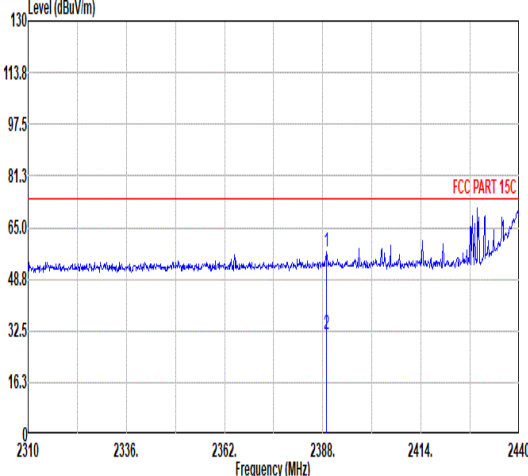
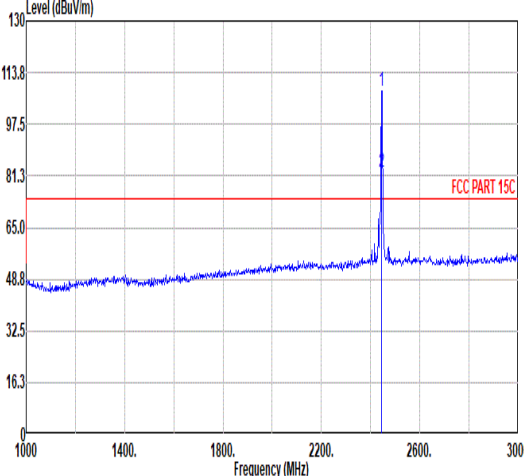


Mode	2																																																																																																																																	
	Band Edge - L																																																																																																																																	
	2400-2483.5_Zigbee_CH19_2445MHz																																																																																																																																	
ANT	2																																																																																																																																	
Pol.	Vertical						Fundamental																																																																																																																											
Peak																																																																																																																																		
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.04</td><td>57.38</td><td>74.00</td><td>-16.62</td><td>44.49</td><td>32.47</td><td>6.60</td><td>32.18</td><td>6.00</td><td>101</td><td>233</td><td>PEAK</td></tr><tr><td>2</td><td>2389.04</td><td>31.45</td><td>54.00</td><td>-22.55</td><td>18.56</td><td>32.47</td><td>6.60</td><td>32.18</td><td>6.00</td><td>101</td><td>233</td><td>AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.04	57.38	74.00	-16.62	44.49	32.47	6.60	32.18	6.00	101	233	PEAK	2	2389.04	31.45	54.00	-22.55	18.56	32.47	6.60	32.18	6.00	101	233	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2445.00</td><td>108.16</td><td>-----</td><td>-----</td><td>95.27</td><td>32.42</td><td>6.68</td><td>32.21</td><td>6.00</td><td>101</td><td>233</td><td>PEAK</td></tr><tr><td>2</td><td>2445.00</td><td>82.23</td><td>-----</td><td>-----</td><td>69.34</td><td>32.42</td><td>6.68</td><td>32.21</td><td>6.00</td><td>101</td><td>233</td><td>AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2445.00	108.16	-----	-----	95.27	32.42	6.68	32.21	6.00	101	233	PEAK	2	2445.00	82.23	-----	-----	69.34	32.42	6.68	32.21	6.00	101	233	AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	2389.04	57.38	74.00	-16.62	44.49	32.47	6.60	32.18	6.00	101	233	PEAK																																																																																																																						
2	2389.04	31.45	54.00	-22.55	18.56	32.47	6.60	32.18	6.00	101	233	AVERAGE																																																																																																																						
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	2445.00	108.16	-----	-----	95.27	32.42	6.68	32.21	6.00	101	233	PEAK																																																																																																																						
2	2445.00	82.23	-----	-----	69.34	32.42	6.68	32.21	6.00	101	233	AVERAGE																																																																																																																						


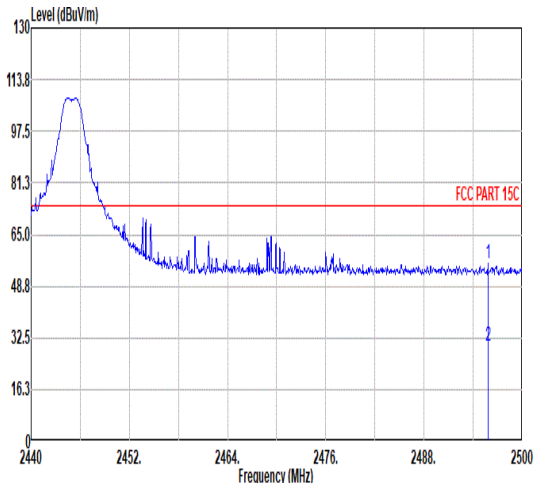


Mode	2																																																										
	Band Edge - R																																																										
	2400-2483.5_Zigbee_CH19_2445MHz																																																										
ANT	2																																																										
Pol.	Vertical	Fundamental																																																									
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2495.80</td><td>55.80</td><td>74.00</td><td>-18.20</td><td>42.62</td><td>32.67</td><td>6.75</td><td>32.24</td><td>6.00</td><td>101</td><td>233 PEAK</td></tr><tr><td>2</td><td>2495.80</td><td>29.87</td><td>54.00</td><td>-24.13</td><td>16.69</td><td>32.67</td><td>6.75</td><td>32.24</td><td>6.00</td><td>101</td><td>233 AVERAGE</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2495.80	55.80	74.00	-18.20	42.62	32.67	6.75	32.24	6.00	101	233 PEAK	2	2495.80	29.87	54.00	-24.13	16.69	32.67	6.75	32.24	6.00	101	233 AVERAGE	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	2495.80	55.80	74.00	-18.20	42.62	32.67	6.75	32.24	6.00	101	233 PEAK																																																
2	2495.80	29.87	54.00	-24.13	16.69	32.67	6.75	32.24	6.00	101	233 AVERAGE																																																

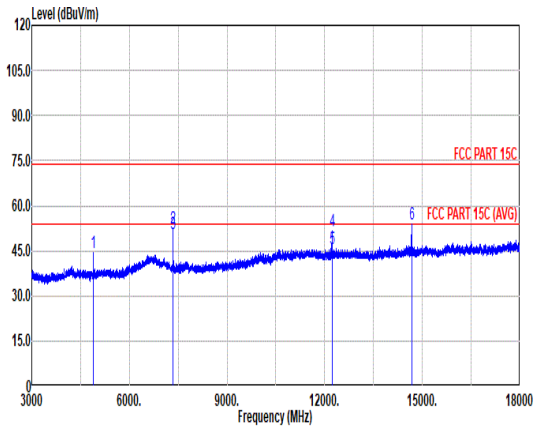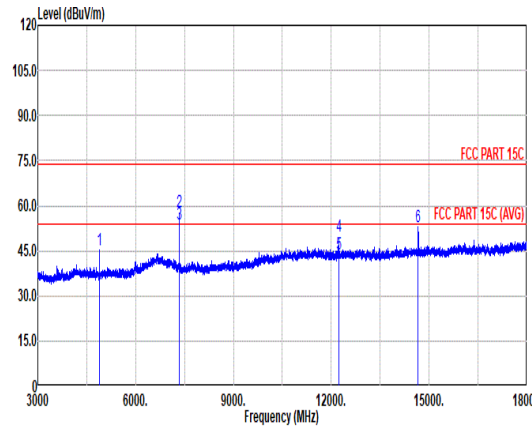


Mode	2																																																																																																													
	Harmonic																																																																																																													
	2400-2483.5_Zigbee_CH19_2445MHz																																																																																																													
ANT	2																																																																																																													
Pol.	Horizontal																																																																																																													
Peak Avg	 <table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4891.50</td><td>44.59</td><td>74.00</td><td>-29.41</td><td>66.78</td><td>34.12</td><td>9.54</td><td>65.85</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>2 7336.50</td><td>52.36</td><td>74.00</td><td>-21.64</td><td>70.21</td><td>35.70</td><td>11.70</td><td>65.25</td><td>0.00</td><td>100</td><td>25 Peak</td></tr><tr><td>3 7336.50</td><td>50.60</td><td>54.00</td><td>-3.40</td><td>68.45</td><td>35.70</td><td>11.70</td><td>65.25</td><td>0.00</td><td>100</td><td>25 Average</td></tr><tr><td>4 12228.00</td><td>51.72</td><td>74.00</td><td>-22.28</td><td>62.35</td><td>38.00</td><td>15.45</td><td>64.88</td><td>0.00</td><td>100</td><td>27 Peak</td></tr><tr><td>5 12228.00</td><td>45.62</td><td>54.00</td><td>-8.38</td><td>56.25</td><td>38.00</td><td>15.45</td><td>64.88</td><td>0.00</td><td>100</td><td>27 Average</td></tr><tr><td>6 14673.00</td><td>53.82</td><td>86.21</td><td>-32.39</td><td>61.33</td><td>39.57</td><td>17.00</td><td>64.08</td><td>0.00</td><td>---</td><td>--- Peak</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 4891.50	44.59	74.00	-29.41	66.78	34.12	9.54	65.85	0.00	---	--- Peak	2 7336.50	52.36	74.00	-21.64	70.21	35.70	11.70	65.25	0.00	100	25 Peak	3 7336.50	50.60	54.00	-3.40	68.45	35.70	11.70	65.25	0.00	100	25 Average	4 12228.00	51.72	74.00	-22.28	62.35	38.00	15.45	64.88	0.00	100	27 Peak	5 12228.00	45.62	54.00	-8.38	56.25	38.00	15.45	64.88	0.00	100	27 Average	6 14673.00	53.82	86.21	-32.39	61.33	39.57	17.00	64.08	0.00	---	--- Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																				
1 4891.50	44.59	74.00	-29.41	66.78	34.12	9.54	65.85	0.00	---	--- Peak																																																																																																				
2 7336.50	52.36	74.00	-21.64	70.21	35.70	11.70	65.25	0.00	100	25 Peak																																																																																																				
3 7336.50	50.60	54.00	-3.40	68.45	35.70	11.70	65.25	0.00	100	25 Average																																																																																																				
4 12228.00	51.72	74.00	-22.28	62.35	38.00	15.45	64.88	0.00	100	27 Peak																																																																																																				
5 12228.00	45.62	54.00	-8.38	56.25	38.00	15.45	64.88	0.00	100	27 Average																																																																																																				
6 14673.00	53.82	86.21	-32.39	61.33	39.57	17.00	64.08	0.00	---	--- Peak																																																																																																				
Peak Avg	 <table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4891.50</td><td>45.31</td><td>74.00</td><td>-28.69</td><td>67.50</td><td>34.12</td><td>9.54</td><td>65.85</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>2 7335.00</td><td>58.16</td><td>74.00</td><td>-15.84</td><td>76.01</td><td>35.70</td><td>11.70</td><td>65.25</td><td>0.00</td><td>100</td><td>196 PEAK</td></tr><tr><td>3 7335.00</td><td>53.96</td><td>54.00</td><td>-0.04</td><td>71.81</td><td>35.70</td><td>11.70</td><td>65.25</td><td>0.00</td><td>100</td><td>196 AVERAGE</td></tr><tr><td>4 12225.00</td><td>49.73</td><td>74.00</td><td>-24.27</td><td>60.36</td><td>38.00</td><td>15.45</td><td>64.88</td><td>0.00</td><td>100</td><td>196 PEAK</td></tr><tr><td>5 12225.00</td><td>43.75</td><td>54.00</td><td>-10.25</td><td>54.38</td><td>38.00</td><td>15.45</td><td>64.88</td><td>0.00</td><td>100</td><td>196 AVERAGE</td></tr><tr><td>6 14667.00</td><td>53.10</td><td>83.51</td><td>-30.41</td><td>60.61</td><td>39.57</td><td>17.00</td><td>64.08</td><td>0.00</td><td>---</td><td>--- Peak</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 4891.50	45.31	74.00	-28.69	67.50	34.12	9.54	65.85	0.00	---	--- Peak	2 7335.00	58.16	74.00	-15.84	76.01	35.70	11.70	65.25	0.00	100	196 PEAK	3 7335.00	53.96	54.00	-0.04	71.81	35.70	11.70	65.25	0.00	100	196 AVERAGE	4 12225.00	49.73	74.00	-24.27	60.36	38.00	15.45	64.88	0.00	100	196 PEAK	5 12225.00	43.75	54.00	-10.25	54.38	38.00	15.45	64.88	0.00	100	196 AVERAGE	6 14667.00	53.10	83.51	-30.41	60.61	39.57	17.00	64.08	0.00	---	--- Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																				
1 4891.50	45.31	74.00	-28.69	67.50	34.12	9.54	65.85	0.00	---	--- Peak																																																																																																				
2 7335.00	58.16	74.00	-15.84	76.01	35.70	11.70	65.25	0.00	100	196 PEAK																																																																																																				
3 7335.00	53.96	54.00	-0.04	71.81	35.70	11.70	65.25	0.00	100	196 AVERAGE																																																																																																				
4 12225.00	49.73	74.00	-24.27	60.36	38.00	15.45	64.88	0.00	100	196 PEAK																																																																																																				
5 12225.00	43.75	54.00	-10.25	54.38	38.00	15.45	64.88	0.00	100	196 AVERAGE																																																																																																				
6 14667.00	53.10	83.51	-30.41	60.61	39.57	17.00	64.08	0.00	---	--- Peak																																																																																																				

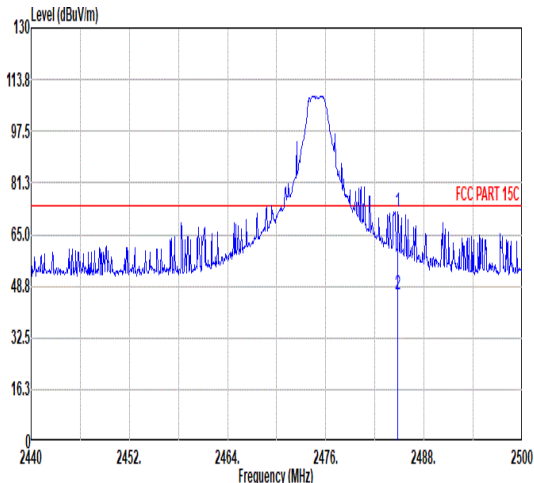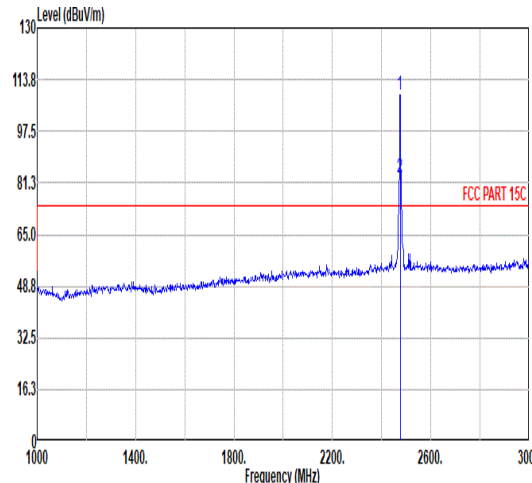

Mode	3																																																																	
	Band Edge																																																																	
	2400-2483.5_Zigbee_CH25_2475MHz																																																																	
ANT	2																																																																	
Pol.	Horizontal																																																																	
Peak																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.82</td><td>72.27</td><td>74.00</td><td>-1.73</td><td>59.16</td><td>32.61</td><td>6.73</td><td>32.23</td><td>6.00</td><td>134 51 PEAK</td></tr><tr><td>2</td><td>2484.82</td><td>46.34</td><td>54.00</td><td>-7.66</td><td>33.23</td><td>32.61</td><td>6.73</td><td>32.23</td><td>6.00</td><td>134 51 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.82	72.27	74.00	-1.73	59.16	32.61	6.73	32.23	6.00	134 51 PEAK	2	2484.82	46.34	54.00	-7.66	33.23	32.61	6.73	32.23	6.00	134 51 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	2484.82	72.27	74.00	-1.73	59.16	32.61	6.73	32.23	6.00	134 51 PEAK																																																								
2	2484.82	46.34	54.00	-7.66	33.23	32.61	6.73	32.23	6.00	134 51 AVERAGE																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2475.00</td><td>108.69</td><td>-----</td><td>-----</td><td>95.64</td><td>32.56</td><td>6.72</td><td>32.23</td><td>6.00</td><td>134 51 PEAK</td></tr><tr><td>2</td><td>2475.00</td><td>82.76</td><td>-----</td><td>-----</td><td>69.71</td><td>32.56</td><td>6.72</td><td>32.23</td><td>6.00</td><td>134 51 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2475.00	108.69	-----	-----	95.64	32.56	6.72	32.23	6.00	134 51 PEAK	2	2475.00	82.76	-----	-----	69.71	32.56	6.72	32.23	6.00	134 51 AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	2475.00	108.69	-----	-----	95.64	32.56	6.72	32.23	6.00	134 51 PEAK																																																								
2	2475.00	82.76	-----	-----	69.71	32.56	6.72	32.23	6.00	134 51 AVERAGE																																																								
																																																																		


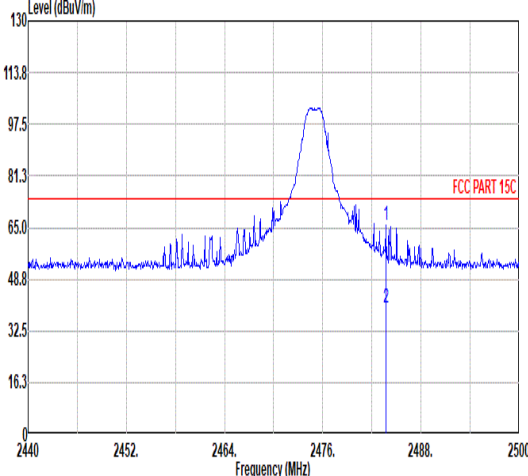


Mode	3																																																																	
	Band Edge																																																																	
	2400-2483.5_Zigbee_CH25_2475MHz																																																																	
ANT	2																																																																	
Pol.	Vertical																																																																	
Peak																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.68</td><td>65.74</td><td>74.00</td><td>-8.26</td><td>52.64</td><td>32.60</td><td>6.73</td><td>32.23</td><td>6.00</td><td>282 360 PEAK</td></tr><tr><td>2</td><td>2483.68</td><td>39.81</td><td>54.00</td><td>-14.19</td><td>26.71</td><td>32.60</td><td>6.73</td><td>32.23</td><td>6.00</td><td>282 360 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.68	65.74	74.00	-8.26	52.64	32.60	6.73	32.23	6.00	282 360 PEAK	2	2483.68	39.81	54.00	-14.19	26.71	32.60	6.73	32.23	6.00	282 360 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	2483.68	65.74	74.00	-8.26	52.64	32.60	6.73	32.23	6.00	282 360 PEAK																																																								
2	2483.68	39.81	54.00	-14.19	26.71	32.60	6.73	32.23	6.00	282 360 AVERAGE																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2475.00</td><td>102.81</td><td>-----</td><td>-----</td><td>89.78</td><td>32.54</td><td>6.72</td><td>32.23</td><td>6.00</td><td>282 360 PEAK</td></tr><tr><td>2</td><td>2475.00</td><td>76.88</td><td>-----</td><td>-----</td><td>63.85</td><td>32.54</td><td>6.72</td><td>32.23</td><td>6.00</td><td>282 360 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2475.00	102.81	-----	-----	89.78	32.54	6.72	32.23	6.00	282 360 PEAK	2	2475.00	76.88	-----	-----	63.85	32.54	6.72	32.23	6.00	282 360 AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	2475.00	102.81	-----	-----	89.78	32.54	6.72	32.23	6.00	282 360 PEAK																																																								
2	2475.00	76.88	-----	-----	63.85	32.54	6.72	32.23	6.00	282 360 AVERAGE																																																								




Mode	3																																																																															
	Harmonic																																																																															
	2400-2483.5_Zigbee_CH25_2475MHz																																																																															
ANT	2																																																																															
Pol.	Horizontal																																																																															
Peak Avg																																																																																
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4951.50</td><td>45.85</td><td>74.00</td><td>-28.15</td><td>68.01</td><td>34.00</td><td>9.60</td><td>65.76</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7425.00</td><td>40.98</td><td>74.00</td><td>-33.02</td><td>59.04</td><td>35.70</td><td>11.76</td><td>65.52</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>12375.00</td><td>46.00</td><td>74.00</td><td>-28.00</td><td>56.47</td><td>38.00</td><td>15.56</td><td>64.83</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4951.50	45.85	74.00	-28.15	68.01	34.00	9.60	65.76	0.00	---	Peak	2	7425.00	40.98	74.00	-33.02	59.04	35.70	11.76	65.52	0.00	---	PEAK	3	12375.00	46.00	74.00	-28.00	56.47	38.00	15.56	64.83	0.00	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	4951.50	45.85	74.00	-28.15	68.01	34.00	9.60	65.76	0.00	---	Peak																																																																					
2	7425.00	40.98	74.00	-33.02	59.04	35.70	11.76	65.52	0.00	---	PEAK																																																																					
3	12375.00	46.00	74.00	-28.00	56.47	38.00	15.56	64.83	0.00	---	PEAK																																																																					
Vertical																																																																																
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4948.50</td><td>46.56</td><td>74.00</td><td>-27.44</td><td>68.72</td><td>34.00</td><td>9.60</td><td>65.76</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7425.00</td><td>42.75</td><td>74.00</td><td>-31.25</td><td>60.81</td><td>35.70</td><td>11.76</td><td>65.52</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>12375.00</td><td>45.49</td><td>74.00</td><td>-28.51</td><td>55.96</td><td>38.00</td><td>15.56</td><td>64.83</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4948.50	46.56	74.00	-27.44	68.72	34.00	9.60	65.76	0.00	---	Peak	2	7425.00	42.75	74.00	-31.25	60.81	35.70	11.76	65.52	0.00	---	PEAK	3	12375.00	45.49	74.00	-28.51	55.96	38.00	15.56	64.83	0.00	---	PEAK	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	4948.50	46.56	74.00	-27.44	68.72	34.00	9.60	65.76	0.00	---	Peak																																																																					
2	7425.00	42.75	74.00	-31.25	60.81	35.70	11.76	65.52	0.00	---	PEAK																																																																					
3	12375.00	45.49	74.00	-28.51	55.96	38.00	15.56	64.83	0.00	---	PEAK																																																																					

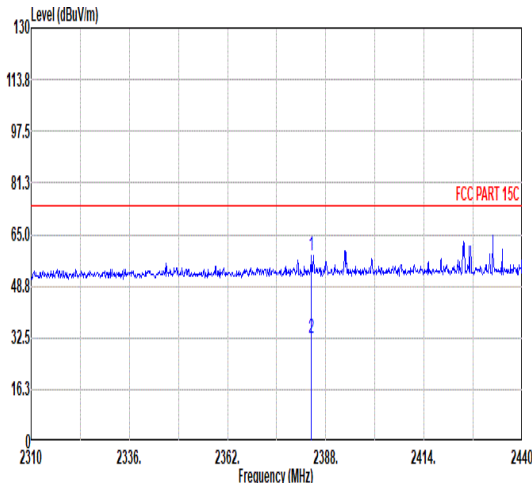
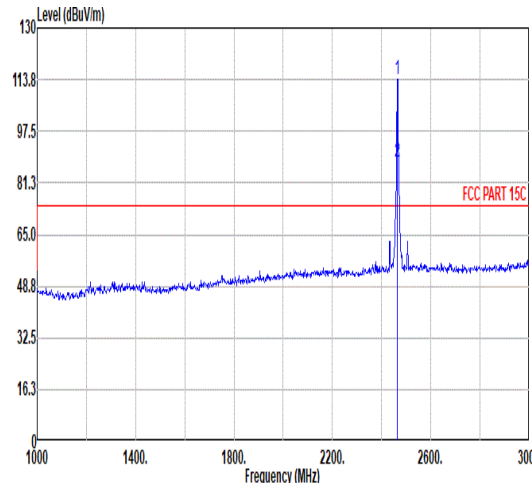


Mode	4																																																																																																																													
	Band Edge - L																																																																																																																													
	2400-2483.5_Zigbee_CH23_2465MHz																																																																																																																													
ANT	2																																																																																																																													
Pol.	Horizontal						Fundamental																																																																																																																							
Peak																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2384.23</td><td>58.30</td><td>74.00</td><td>-15.70</td><td>45.49</td><td>32.41</td><td>6.59</td><td>32.19</td><td>6.00</td><td>110</td><td>231</td><td>PEAK</td></tr><tr><td>2</td><td>2384.23</td><td>32.37</td><td>54.00</td><td>-21.63</td><td>19.56</td><td>32.41</td><td>6.59</td><td>32.19</td><td>6.00</td><td>110</td><td>231</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2384.23	58.30	74.00	-15.70	45.49	32.41	6.59	32.19	6.00	110	231	PEAK	2	2384.23	32.37	54.00	-21.63	19.56	32.41	6.59	32.19	6.00	110	231	AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2465.00</td><td>113.82</td><td>-----</td><td>-----</td><td>100.83</td><td>32.50</td><td>6.71</td><td>32.22</td><td>6.00</td><td>110</td><td>231</td><td>PEAK</td></tr><tr><td>2</td><td>2465.00</td><td>87.89</td><td>-----</td><td>-----</td><td>74.90</td><td>32.50</td><td>6.71</td><td>32.22</td><td>6.00</td><td>110</td><td>231</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2465.00	113.82	-----	-----	100.83	32.50	6.71	32.22	6.00	110	231	PEAK	2	2465.00	87.89	-----	-----	74.90	32.50	6.71	32.22	6.00	110	231	AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2384.23	58.30	74.00	-15.70	45.49	32.41	6.59	32.19	6.00	110	231	PEAK																																																																																																																		
2	2384.23	32.37	54.00	-21.63	19.56	32.41	6.59	32.19	6.00	110	231	AVERAGE																																																																																																																		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2465.00	113.82	-----	-----	100.83	32.50	6.71	32.22	6.00	110	231	PEAK																																																																																																																		
2	2465.00	87.89	-----	-----	74.90	32.50	6.71	32.22	6.00	110	231	AVERAGE																																																																																																																		

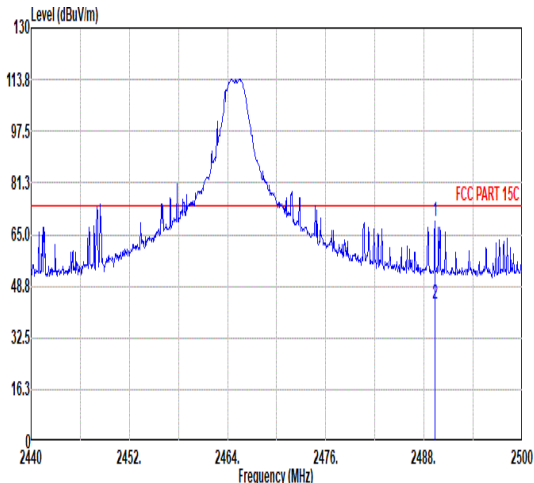

Mode	4																																																																			
	Band Edge - R																																																																			
	2400-2483.5_Zigbee_CH23_2465MHz																																																																			
ANT	2																																																																			
Pol.	Horizontal										Fundamental																																																									
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2489.32</td><td>68.96</td><td>74.00</td><td>-5.04</td><td>55.82</td><td>32.64</td><td>6.74</td><td>32.24</td><td>6.00</td><td>110</td><td>231 PEAK</td></tr><tr><td>2</td><td>2489.32</td><td>43.03</td><td>54.00</td><td>-10.97</td><td>29.89</td><td>32.64</td><td>6.74</td><td>32.24</td><td>6.00</td><td>110</td><td>231 AVERAGE</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2489.32	68.96	74.00	-5.04	55.82	32.64	6.74	32.24	6.00	110	231 PEAK	2	2489.32	43.03	54.00	-10.97	29.89	32.64	6.74	32.24	6.00	110	231 AVERAGE	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																										
1	2489.32	68.96	74.00	-5.04	55.82	32.64	6.74	32.24	6.00	110	231 PEAK																																																									
2	2489.32	43.03	54.00	-10.97	29.89	32.64	6.74	32.24	6.00	110	231 AVERAGE																																																									

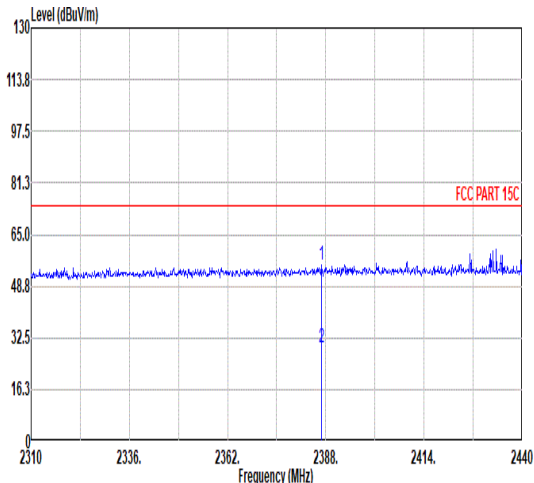
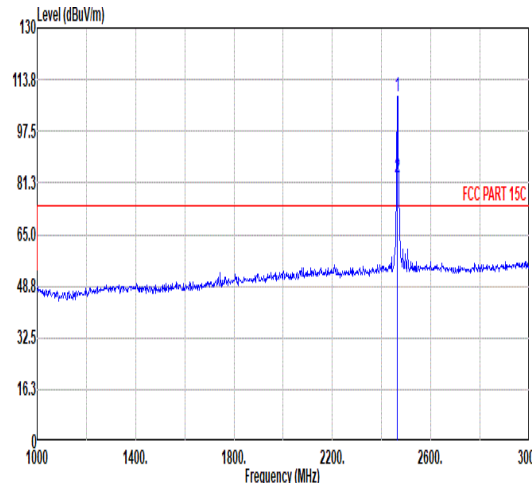


Mode	4																																																																																																																													
	Band Edge - L																																																																																																																													
	2400-2483.5_Zigbee_CH23_2465MHz																																																																																																																													
ANT	2																																																																																																																													
Pol.	Vertical						Fundamental																																																																																																																							
Peak																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.83</td><td>55.46</td><td>74.00</td><td>-18.54</td><td>42.60</td><td>32.44</td><td>6.60</td><td>32.18</td><td>6.00</td><td>391</td><td>239</td><td>PEAK</td></tr><tr><td>2</td><td>2386.83</td><td>29.53</td><td>54.00</td><td>-24.47</td><td>16.67</td><td>32.44</td><td>6.60</td><td>32.18</td><td>6.00</td><td>391</td><td>239</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.83	55.46	74.00	-18.54	42.60	32.44	6.60	32.18	6.00	391	239	PEAK	2	2386.83	29.53	54.00	-24.47	16.67	32.44	6.60	32.18	6.00	391	239	AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2465.00</td><td>108.62</td><td>-----</td><td>-----</td><td>95.65</td><td>32.48</td><td>6.71</td><td>32.22</td><td>6.00</td><td>391</td><td>239</td><td>PEAK</td></tr><tr><td>2</td><td>2465.00</td><td>82.69</td><td>-----</td><td>-----</td><td>69.72</td><td>32.48</td><td>6.71</td><td>32.22</td><td>6.00</td><td>391</td><td>239</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2465.00	108.62	-----	-----	95.65	32.48	6.71	32.22	6.00	391	239	PEAK	2	2465.00	82.69	-----	-----	69.72	32.48	6.71	32.22	6.00	391	239	AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2386.83	55.46	74.00	-18.54	42.60	32.44	6.60	32.18	6.00	391	239	PEAK																																																																																																																		
2	2386.83	29.53	54.00	-24.47	16.67	32.44	6.60	32.18	6.00	391	239	AVERAGE																																																																																																																		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2465.00	108.62	-----	-----	95.65	32.48	6.71	32.22	6.00	391	239	PEAK																																																																																																																		
2	2465.00	82.69	-----	-----	69.72	32.48	6.71	32.22	6.00	391	239	AVERAGE																																																																																																																		





Mode	4																																																																			
	Band Edge - R																																																																			
	2400-2483.5_Zigbee_CH23_2465MHz																																																																			
ANT	2																																																																			
Pol.	Vertical						Fundamental																																																													
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2488.90</td><td>64.43</td><td>74.00</td><td>-9.57</td><td>51.30</td><td>32.63</td><td>6.74</td><td>32.24</td><td>6.00</td><td>391</td><td>239 PEAK</td></tr><tr><td>2</td><td>2488.90</td><td>38.50</td><td>54.00</td><td>-15.50</td><td>25.37</td><td>32.63</td><td>6.74</td><td>32.24</td><td>6.00</td><td>391</td><td>239 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2488.90	64.43	74.00	-9.57	51.30	32.63	6.74	32.24	6.00	391	239 PEAK	2	2488.90	38.50	54.00	-15.50	25.37	32.63	6.74	32.24	6.00	391	239 AVERAGE	Blank				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	2488.90	64.43	74.00	-9.57	51.30	32.63	6.74	32.24	6.00	391	239 PEAK																																																									
2	2488.90	38.50	54.00	-15.50	25.37	32.63	6.74	32.24	6.00	391	239 AVERAGE																																																									

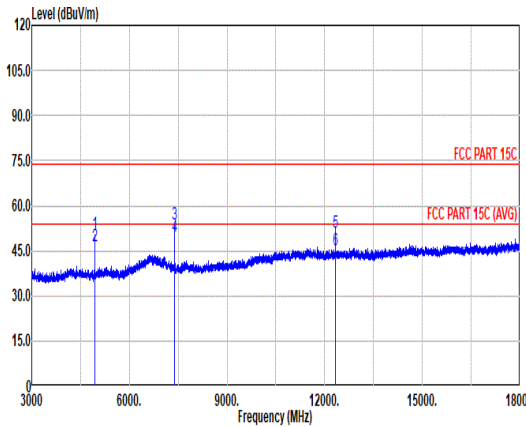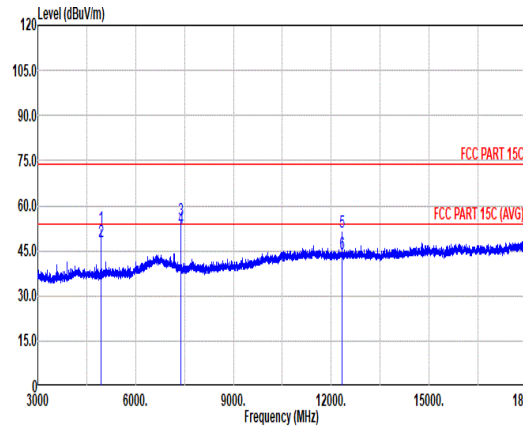


Mode	4																																																																																																																		
	Harmonic																																																																																																																		
	2400-2483.5_Zigbee_CH23_2465MHz																																																																																																																		
ANT	2																																																																																																																		
Pol.	Horizontal																																																																																																																		
Peak Avg																																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4930.00</td><td>50.61</td><td>74.00</td><td>-23.39</td><td>72.78</td><td>34.04</td><td>9.58</td><td>65.79</td><td>0.00</td><td>101</td><td>94 PEAK</td></tr><tr><td>2</td><td>4930.00</td><td>46.48</td><td>54.00</td><td>-7.52</td><td>68.65</td><td>34.04</td><td>9.58</td><td>65.79</td><td>0.00</td><td>101</td><td>94 AVERAGE</td></tr><tr><td>3</td><td>7395.00</td><td>53.88</td><td>74.00</td><td>-20.12</td><td>71.89</td><td>35.70</td><td>11.72</td><td>65.43</td><td>0.00</td><td>101</td><td>94 PEAK</td></tr><tr><td>4</td><td>7395.00</td><td>49.81</td><td>54.00</td><td>-4.19</td><td>67.82</td><td>35.70</td><td>11.72</td><td>65.43</td><td>0.00</td><td>101</td><td>94 AVERAGE</td></tr><tr><td>5</td><td>12325.00</td><td>51.31</td><td>74.00</td><td>-22.69</td><td>61.84</td><td>38.80</td><td>15.52</td><td>64.85</td><td>0.00</td><td>101</td><td>94 PEAK</td></tr><tr><td>6</td><td>12325.00</td><td>45.39</td><td>54.00</td><td>-8.61</td><td>55.91</td><td>38.80</td><td>15.53</td><td>64.85</td><td>0.00</td><td>101</td><td>94 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4930.00	50.61	74.00	-23.39	72.78	34.04	9.58	65.79	0.00	101	94 PEAK	2	4930.00	46.48	54.00	-7.52	68.65	34.04	9.58	65.79	0.00	101	94 AVERAGE	3	7395.00	53.88	74.00	-20.12	71.89	35.70	11.72	65.43	0.00	101	94 PEAK	4	7395.00	49.81	54.00	-4.19	67.82	35.70	11.72	65.43	0.00	101	94 AVERAGE	5	12325.00	51.31	74.00	-22.69	61.84	38.80	15.52	64.85	0.00	101	94 PEAK	6	12325.00	45.39	54.00	-8.61	55.91	38.80	15.53	64.85	0.00	101
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																									
1	4930.00	50.61	74.00	-23.39	72.78	34.04	9.58	65.79	0.00	101	94 PEAK																																																																																																								
2	4930.00	46.48	54.00	-7.52	68.65	34.04	9.58	65.79	0.00	101	94 AVERAGE																																																																																																								
3	7395.00	53.88	74.00	-20.12	71.89	35.70	11.72	65.43	0.00	101	94 PEAK																																																																																																								
4	7395.00	49.81	54.00	-4.19	67.82	35.70	11.72	65.43	0.00	101	94 AVERAGE																																																																																																								
5	12325.00	51.31	74.00	-22.69	61.84	38.80	15.52	64.85	0.00	101	94 PEAK																																																																																																								
6	12325.00	45.39	54.00	-8.61	55.91	38.80	15.53	64.85	0.00	101	94 AVERAGE																																																																																																								
Peak Avg																																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4930.00</td><td>52.51</td><td>74.00</td><td>-21.49</td><td>74.68</td><td>34.04</td><td>9.58</td><td>65.79</td><td>0.00</td><td>100</td><td>118 PEAK</td></tr><tr><td>2</td><td>4930.00</td><td>48.20</td><td>54.00</td><td>-5.80</td><td>70.37</td><td>34.04</td><td>9.58</td><td>65.79</td><td>0.00</td><td>100</td><td>118 AVERAGE</td></tr><tr><td>3</td><td>7393.50</td><td>55.02</td><td>74.00</td><td>-18.98</td><td>73.02</td><td>35.70</td><td>11.72</td><td>65.42</td><td>0.00</td><td>100</td><td>203 Peak</td></tr><tr><td>4</td><td>7395.00</td><td>52.65</td><td>54.00</td><td>-1.35</td><td>70.66</td><td>35.70</td><td>11.72</td><td>65.43</td><td>0.00</td><td>100</td><td>118 AVERAGE</td></tr><tr><td>5</td><td>12325.00</td><td>51.35</td><td>74.00</td><td>-22.65</td><td>61.88</td><td>38.80</td><td>15.52</td><td>64.85</td><td>0.00</td><td>100</td><td>118 PEAK</td></tr><tr><td>6</td><td>12325.00</td><td>43.98</td><td>54.00</td><td>-10.02</td><td>54.51</td><td>38.80</td><td>15.52</td><td>64.85</td><td>0.00</td><td>100</td><td>118 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4930.00	52.51	74.00	-21.49	74.68	34.04	9.58	65.79	0.00	100	118 PEAK	2	4930.00	48.20	54.00	-5.80	70.37	34.04	9.58	65.79	0.00	100	118 AVERAGE	3	7393.50	55.02	74.00	-18.98	73.02	35.70	11.72	65.42	0.00	100	203 Peak	4	7395.00	52.65	54.00	-1.35	70.66	35.70	11.72	65.43	0.00	100	118 AVERAGE	5	12325.00	51.35	74.00	-22.65	61.88	38.80	15.52	64.85	0.00	100	118 PEAK	6	12325.00	43.98	54.00	-10.02	54.51	38.80	15.52	64.85	0.00	100
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																									
1	4930.00	52.51	74.00	-21.49	74.68	34.04	9.58	65.79	0.00	100	118 PEAK																																																																																																								
2	4930.00	48.20	54.00	-5.80	70.37	34.04	9.58	65.79	0.00	100	118 AVERAGE																																																																																																								
3	7393.50	55.02	74.00	-18.98	73.02	35.70	11.72	65.42	0.00	100	203 Peak																																																																																																								
4	7395.00	52.65	54.00	-1.35	70.66	35.70	11.72	65.43	0.00	100	118 AVERAGE																																																																																																								
5	12325.00	51.35	74.00	-22.65	61.88	38.80	15.52	64.85	0.00	100	118 PEAK																																																																																																								
6	12325.00	43.98	54.00	-10.02	54.51	38.80	15.52	64.85	0.00	100	118 AVERAGE																																																																																																								

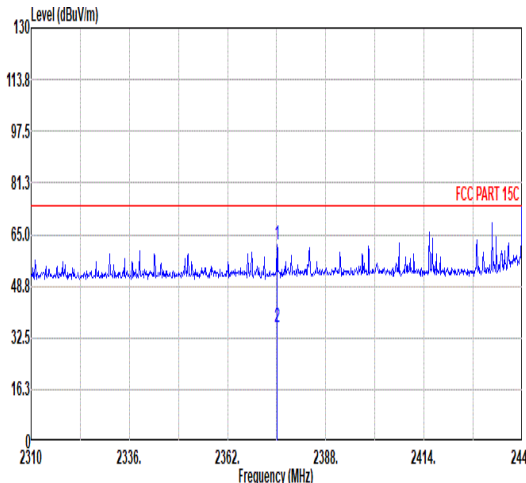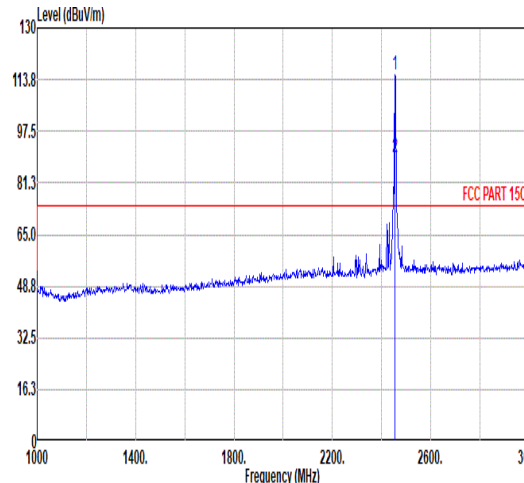

Mode	5																																																																																																																													
	Band Edge - L																																																																																																																													
	2400-2483.5_Zigbee_CH21_2455MHz																																																																																																																													
ANT	2																																																																																																																													
Pol.	Horizontal						Fundamental																																																																																																																							
Peak																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2375.13</td><td>61.68</td><td>74.00</td><td>-12.32</td><td>48.99</td><td>32.30</td><td>6.58</td><td>32.19</td><td>6.00</td><td>158</td><td>315</td><td>PEAK</td></tr><tr><td>2</td><td>2375.13</td><td>35.75</td><td>54.00</td><td>-18.25</td><td>23.06</td><td>32.30</td><td>6.58</td><td>32.19</td><td>6.00</td><td>158</td><td>315</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2375.13	61.68	74.00	-12.32	48.99	32.30	6.58	32.19	6.00	158	315	PEAK	2	2375.13	35.75	54.00	-18.25	23.06	32.30	6.58	32.19	6.00	158	315	AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2455.00</td><td>115.00</td><td>-----</td><td>-----</td><td>102.18</td><td>32.42</td><td>6.69</td><td>32.21</td><td>6.00</td><td>158</td><td>315</td><td>PEAK</td></tr><tr><td>2</td><td>2455.00</td><td>89.15</td><td>-----</td><td>-----</td><td>76.25</td><td>32.42</td><td>6.69</td><td>32.21</td><td>6.00</td><td>158</td><td>315</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2455.00	115.00	-----	-----	102.18	32.42	6.69	32.21	6.00	158	315	PEAK	2	2455.00	89.15	-----	-----	76.25	32.42	6.69	32.21	6.00	158	315	AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2375.13	61.68	74.00	-12.32	48.99	32.30	6.58	32.19	6.00	158	315	PEAK																																																																																																																		
2	2375.13	35.75	54.00	-18.25	23.06	32.30	6.58	32.19	6.00	158	315	AVERAGE																																																																																																																		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2455.00	115.00	-----	-----	102.18	32.42	6.69	32.21	6.00	158	315	PEAK																																																																																																																		
2	2455.00	89.15	-----	-----	76.25	32.42	6.69	32.21	6.00	158	315	AVERAGE																																																																																																																		

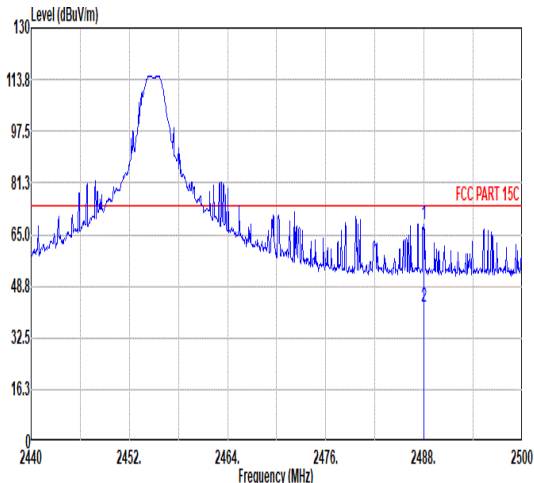


Mode	5																																																																			
	Band Edge - R																																																																			
	2400-2483.5_Zigbee_CH21_2455MHz																																																																			
ANT	2																																																																			
Pol.	Horizontal										Fundamental																																																									
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2488.00</td><td>68.20</td><td>74.00</td><td>-5.80</td><td>55.07</td><td>32.63</td><td>6.74</td><td>32.24</td><td>6.00</td><td>158</td><td>315 PEAK</td></tr><tr><td>2</td><td>2488.00</td><td>42.27</td><td>54.00</td><td>-11.73</td><td>29.14</td><td>32.63</td><td>6.74</td><td>32.24</td><td>6.00</td><td>158</td><td>315 AVERAGE</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2488.00	68.20	74.00	-5.80	55.07	32.63	6.74	32.24	6.00	158	315 PEAK	2	2488.00	42.27	54.00	-11.73	29.14	32.63	6.74	32.24	6.00	158	315 AVERAGE	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																										
1	2488.00	68.20	74.00	-5.80	55.07	32.63	6.74	32.24	6.00	158	315 PEAK																																																									
2	2488.00	42.27	54.00	-11.73	29.14	32.63	6.74	32.24	6.00	158	315 AVERAGE																																																									



		5																																																																						
Mode		Band Edge - L																																																																						
		2400-2483.5_Zigbee_CH21_2455MHz																																																																						
ANT		2																																																																						
Pol.		Vertical						Fundamental																																																																
Peak																																																																								
		<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2361.22</td><td>55.83</td><td>74.00</td><td>-18.17</td><td>43.33</td><td>32.13</td><td>6.56</td><td>32.19</td><td>6.00</td><td>321</td><td>235</td><td>PEAK</td></tr><tr><td>2</td><td>2361.22</td><td>29.90</td><td>54.00</td><td>-24.10</td><td>17.40</td><td>32.13</td><td>6.56</td><td>32.19</td><td>6.00</td><td>321</td><td>235</td><td>AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2361.22	55.83	74.00	-18.17	43.33	32.13	6.56	32.19	6.00	321	235	PEAK	2	2361.22	29.90	54.00	-24.10	17.40	32.13	6.56	32.19	6.00	321	235	AVERAGE
			Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																													
		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																														
1	2361.22	55.83	74.00	-18.17	43.33	32.13	6.56	32.19	6.00	321	235	PEAK																																																												
2	2361.22	29.90	54.00	-24.10	17.40	32.13	6.56	32.19	6.00	321	235	AVERAGE																																																												
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2455.00</td><td>109.32</td><td>-----</td><td>-----</td><td>96.40</td><td>32.44</td><td>6.70</td><td>32.22</td><td>6.00</td><td>321</td><td>235</td><td>PEAK</td></tr><tr><td>2</td><td>2455.00</td><td>83.39</td><td>-----</td><td>-----</td><td>70.47</td><td>32.44</td><td>6.70</td><td>32.22</td><td>6.00</td><td>321</td><td>235</td><td>AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2455.00	109.32	-----	-----	96.40	32.44	6.70	32.22	6.00	321	235	PEAK	2	2455.00	83.39	-----	-----	70.47	32.44	6.70	32.22	6.00	321	235	AVERAGE		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																														
1	2455.00	109.32	-----	-----	96.40	32.44	6.70	32.22	6.00	321	235	PEAK																																																												
2	2455.00	83.39	-----	-----	70.47	32.44	6.70	32.22	6.00	321	235	AVERAGE																																																												

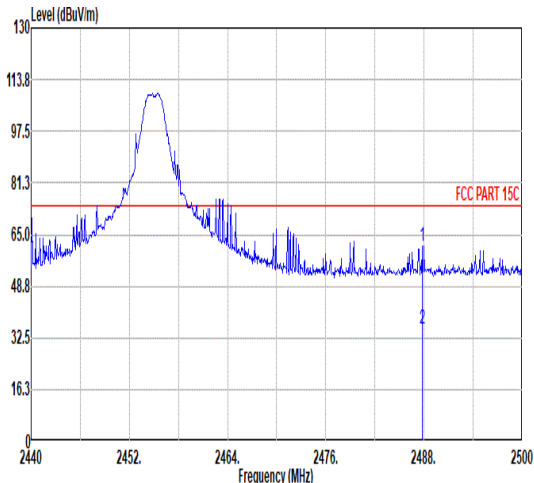

Mode	5																																																																			
	Band Edge - R																																																																			
	2400-2483.5_Zigbee_CH21_2455MHz																																																																			
ANT	2																																																																			
Pol.	Vertical										Fundamental																																																									
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.76</td><td>61.32</td><td>74.00</td><td>-12.68</td><td>48.19</td><td>32.63</td><td>6.74</td><td>32.24</td><td>6.00</td><td>321</td><td>235 PEAK</td></tr><tr><td>2</td><td>2487.76</td><td>35.39</td><td>54.00</td><td>-18.61</td><td>22.26</td><td>32.63</td><td>6.74</td><td>32.24</td><td>6.00</td><td>321</td><td>235 AVERAGE</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2487.76	61.32	74.00	-12.68	48.19	32.63	6.74	32.24	6.00	321	235 PEAK	2	2487.76	35.39	54.00	-18.61	22.26	32.63	6.74	32.24	6.00	321	235 AVERAGE	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	2487.76	61.32	74.00	-12.68	48.19	32.63	6.74	32.24	6.00	321	235 PEAK																																																									
2	2487.76	35.39	54.00	-18.61	22.26	32.63	6.74	32.24	6.00	321	235 AVERAGE																																																									




		5																																																																																																																																																			
Mode		Harmonic																																																																																																																																																			
		2400-2483.5_Zigbee_CH21_2455MHz																																																																																																																																																			
ANT		2																																																																																																																																																			
Pol.		Horizontal																																																																																																																																																			
Peak Avg																																																																																																																																																					
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4911.00	46.34	74.00	-27.66	68.52	34.08	9.56	65.82	0.00	---	---	Peak	2	7363.50	49.57	74.00	-24.43	67.49	35.70	11.71	65.33	0.00	300	330	Peak	3	7363.50	47.41	54.00	-6.59	65.33	35.70	11.71	65.33	0.00	300	330	Average	4	12273.00	51.23	74.00	-22.77	61.81	38.00	15.48	64.86	0.00	100	156	Peak	5	12275.00	45.92	54.00	-8.08	56.50	38.00	15.48	64.86	0.00	100	156	AVERAGE	6	14727.00	49.41	87.43	-38.02	56.85	39.60	17.04	64.08	0.00	---	---	Peak																																						
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																											
1	4911.00	46.34	74.00	-27.66	68.52	34.08	9.56	65.82	0.00	---	---	Peak																																																																																																																																									
2	7363.50	49.57	74.00	-24.43	67.49	35.70	11.71	65.33	0.00	300	330	Peak																																																																																																																																									
3	7363.50	47.41	54.00	-6.59	65.33	35.70	11.71	65.33	0.00	300	330	Average																																																																																																																																									
4	12273.00	51.23	74.00	-22.77	61.81	38.00	15.48	64.86	0.00	100	156	Peak																																																																																																																																									
5	12275.00	45.92	54.00	-8.08	56.50	38.00	15.48	64.86	0.00	100	156	AVERAGE																																																																																																																																									
6	14727.00	49.41	87.43	-38.02	56.85	39.60	17.04	64.08	0.00	---	---	Peak																																																																																																																																									
		Vertical																																																																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4910.00</td><td>52.75</td><td>74.00</td><td>-21.25</td><td>74.93</td><td>34.08</td><td>9.56</td><td>65.82</td><td>0.00</td><td>100</td><td>114</td><td>PEAK</td></tr><tr><td>2</td><td>4910.00</td><td>48.22</td><td>54.00</td><td>-5.78</td><td>70.40</td><td>34.08</td><td>9.56</td><td>65.82</td><td>0.00</td><td>100</td><td>114</td><td>AVERAGE</td></tr><tr><td>3</td><td>5689.50</td><td>42.95</td><td>81.09</td><td>-38.14</td><td>64.42</td><td>34.08</td><td>10.32</td><td>66.39</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7365.00</td><td>49.85</td><td>74.00</td><td>-24.15</td><td>67.78</td><td>35.70</td><td>11.71</td><td>65.34</td><td>0.00</td><td>100</td><td>114</td><td>PEAK</td></tr><tr><td>5</td><td>7365.00</td><td>44.40</td><td>54.00</td><td>-9.60</td><td>62.33</td><td>35.70</td><td>11.71</td><td>65.34</td><td>0.00</td><td>100</td><td>114</td><td>AVERAGE</td></tr><tr><td>6</td><td>12275.00</td><td>52.03</td><td>74.00</td><td>-21.97</td><td>62.61</td><td>38.00</td><td>15.48</td><td>64.86</td><td>0.00</td><td>100</td><td>114</td><td>PEAK</td></tr><tr><td>7</td><td>12275.00</td><td>47.01</td><td>54.00</td><td>-6.99</td><td>57.58</td><td>38.00</td><td>15.49</td><td>64.86</td><td>0.00</td><td>100</td><td>114</td><td>AVERAGE</td></tr><tr><td>8</td><td>14727.00</td><td>49.49</td><td>81.09</td><td>-31.60</td><td>56.93</td><td>39.60</td><td>17.04</td><td>64.08</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4910.00	52.75	74.00	-21.25	74.93	34.08	9.56	65.82	0.00	100	114	PEAK	2	4910.00	48.22	54.00	-5.78	70.40	34.08	9.56	65.82	0.00	100	114	AVERAGE	3	5689.50	42.95	81.09	-38.14	64.42	34.08	10.32	66.39	0.00	---	---	Peak	4	7365.00	49.85	74.00	-24.15	67.78	35.70	11.71	65.34	0.00	100	114	PEAK	5	7365.00	44.40	54.00	-9.60	62.33	35.70	11.71	65.34	0.00	100	114	AVERAGE	6	12275.00	52.03	74.00	-21.97	62.61	38.00	15.48	64.86	0.00	100	114	PEAK	7	12275.00	47.01	54.00	-6.99	57.58	38.00	15.49	64.86	0.00	100	114	AVERAGE	8	14727.00	49.49	81.09	-31.60	56.93	39.60	17.04	64.08	0.00	---	---	Peak
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																											
1	4910.00	52.75	74.00	-21.25	74.93	34.08	9.56	65.82	0.00	100	114	PEAK																																																																																																																																									
2	4910.00	48.22	54.00	-5.78	70.40	34.08	9.56	65.82	0.00	100	114	AVERAGE																																																																																																																																									
3	5689.50	42.95	81.09	-38.14	64.42	34.08	10.32	66.39	0.00	---	---	Peak																																																																																																																																									
4	7365.00	49.85	74.00	-24.15	67.78	35.70	11.71	65.34	0.00	100	114	PEAK																																																																																																																																									
5	7365.00	44.40	54.00	-9.60	62.33	35.70	11.71	65.34	0.00	100	114	AVERAGE																																																																																																																																									
6	12275.00	52.03	74.00	-21.97	62.61	38.00	15.48	64.86	0.00	100	114	PEAK																																																																																																																																									
7	12275.00	47.01	54.00	-6.99	57.58	38.00	15.49	64.86	0.00	100	114	AVERAGE																																																																																																																																									
8	14727.00	49.49	81.09	-31.60	56.93	39.60	17.04	64.08	0.00	---	---	Peak																																																																																																																																									



Mode	2	
	18G-25G	
	2400-2483.5_Zigbee_CH19_2445MHz	
ANT	2	
Pol.	Horizontal	Vertical
Peak Avg		

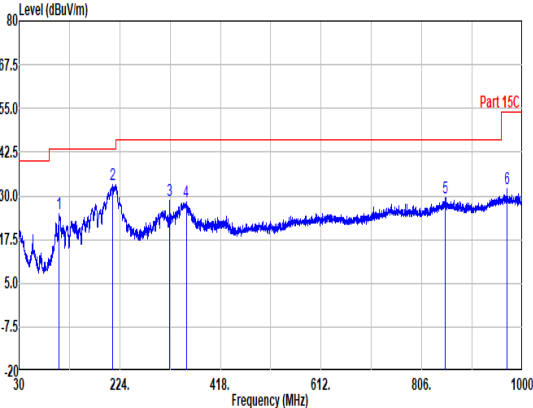

Mode	2																																																																																																													
	30M-1G																																																																																																													
	2400-2483.5_Zigbee_CH19_2445MHz																																																																																																													
ANT	2																																																																																																													
Pol.	Horizontal						Vertical																																																																																																							
Peak																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>107.36</td><td>25.04</td><td>43.50</td><td>-18.46</td><td>38.74</td><td>16.78</td><td>1.58</td><td>32.06</td><td>0.00</td><td>--- Peak</td></tr><tr><td>2</td><td>210.91</td><td>33.22</td><td>43.50</td><td>-10.28</td><td>48.12</td><td>14.93</td><td>2.21</td><td>32.04</td><td>0.00</td><td>--- Peak</td></tr><tr><td>3</td><td>320.03</td><td>28.61</td><td>46.00</td><td>-17.39</td><td>38.66</td><td>19.38</td><td>2.74</td><td>32.17</td><td>0.00</td><td>--- Peak</td></tr><tr><td>4</td><td>352.04</td><td>28.36</td><td>46.00</td><td>-17.64</td><td>37.21</td><td>20.28</td><td>2.86</td><td>31.99</td><td>0.00</td><td>--- Peak</td></tr><tr><td>5</td><td>851.35</td><td>29.54</td><td>46.00</td><td>-16.46</td><td>26.92</td><td>29.67</td><td>4.43</td><td>31.48</td><td>0.00</td><td>--- Peak</td></tr><tr><td>6</td><td>970.17</td><td>31.94</td><td>54.00</td><td>-22.06</td><td>26.83</td><td>30.85</td><td>4.73</td><td>30.47</td><td>0.00</td><td>--- Peak</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	107.36	25.04	43.50	-18.46	38.74	16.78	1.58	32.06	0.00	--- Peak	2	210.91	33.22	43.50	-10.28	48.12	14.93	2.21	32.04	0.00	--- Peak	3	320.03	28.61	46.00	-17.39	38.66	19.38	2.74	32.17	0.00	--- Peak	4	352.04	28.36	46.00	-17.64	37.21	20.28	2.86	31.99	0.00	--- Peak	5	851.35	29.54	46.00	-16.46	26.92	29.67	4.43	31.48	0.00	--- Peak	6	970.17	31.94	54.00	-22.06	26.83	30.85	4.73	30.47	0.00	--- Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																				
1	107.36	25.04	43.50	-18.46	38.74	16.78	1.58	32.06	0.00	--- Peak																																																																																																				
2	210.91	33.22	43.50	-10.28	48.12	14.93	2.21	32.04	0.00	--- Peak																																																																																																				
3	320.03	28.61	46.00	-17.39	38.66	19.38	2.74	32.17	0.00	--- Peak																																																																																																				
4	352.04	28.36	46.00	-17.64	37.21	20.28	2.86	31.99	0.00	--- Peak																																																																																																				
5	851.35	29.54	46.00	-16.46	26.92	29.67	4.43	31.48	0.00	--- Peak																																																																																																				
6	970.17	31.94	54.00	-22.06	26.83	30.85	4.73	30.47	0.00	--- Peak																																																																																																				
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>56.92</td><td>32.97</td><td>40.00</td><td>-7.03</td><td>51.82</td><td>12.07</td><td>1.15</td><td>32.07</td><td>0.00</td><td>--- Peak</td></tr><tr><td>2</td><td>73.17</td><td>25.84</td><td>40.00</td><td>-14.16</td><td>43.89</td><td>12.63</td><td>1.30</td><td>31.98</td><td>0.00</td><td>--- Peak</td></tr><tr><td>3</td><td>178.90</td><td>24.31</td><td>43.50</td><td>-19.19</td><td>39.48</td><td>14.88</td><td>2.03</td><td>32.08</td><td>0.00</td><td>--- Peak</td></tr><tr><td>4</td><td>210.18</td><td>24.54</td><td>43.50</td><td>-18.96</td><td>39.46</td><td>14.92</td><td>2.20</td><td>32.04</td><td>0.00</td><td>--- Peak</td></tr><tr><td>5</td><td>480.08</td><td>24.13</td><td>46.00</td><td>-21.87</td><td>29.38</td><td>23.59</td><td>3.34</td><td>32.18</td><td>0.00</td><td>--- Peak</td></tr><tr><td>6</td><td>755.08</td><td>27.44</td><td>46.00</td><td>-18.56</td><td>26.95</td><td>28.04</td><td>4.19</td><td>31.74</td><td>0.00</td><td>--- Peak</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	56.92	32.97	40.00	-7.03	51.82	12.07	1.15	32.07	0.00	--- Peak	2	73.17	25.84	40.00	-14.16	43.89	12.63	1.30	31.98	0.00	--- Peak	3	178.90	24.31	43.50	-19.19	39.48	14.88	2.03	32.08	0.00	--- Peak	4	210.18	24.54	43.50	-18.96	39.46	14.92	2.20	32.04	0.00	--- Peak	5	480.08	24.13	46.00	-21.87	29.38	23.59	3.34	32.18	0.00	--- Peak	6	755.08	27.44	46.00	-18.56	26.95	28.04	4.19	31.74	0.00	--- Peak	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																				
1	56.92	32.97	40.00	-7.03	51.82	12.07	1.15	32.07	0.00	--- Peak																																																																																																				
2	73.17	25.84	40.00	-14.16	43.89	12.63	1.30	31.98	0.00	--- Peak																																																																																																				
3	178.90	24.31	43.50	-19.19	39.48	14.88	2.03	32.08	0.00	--- Peak																																																																																																				
4	210.18	24.54	43.50	-18.96	39.46	14.92	2.20	32.04	0.00	--- Peak																																																																																																				
5	480.08	24.13	46.00	-21.87	29.38	23.59	3.34	32.18	0.00	--- Peak																																																																																																				
6	755.08	27.44	46.00	-18.56	26.95	28.04	4.19	31.74	0.00	--- Peak																																																																																																				

<Co-location>





Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 6	2400-2483.5	1	Bluetooth-LE_GSKF	39	2480	2Mbps	-	-
	2400-2483.5	2	Zigbee	19	2445	250kpbs	-	-





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
6	Bluetooth-LE_GSKF	39	2483.50	49.62	54.00	-4.38	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE_GSKF	39	7441.5	47.88	54.00	-26.12	H	AVERAGE	Pass	Harmonic
	Zigbee	19	2486.26	64.89	74.00	-9.11	H	PEAK	Pass	Band Edge
	Zigbee	19	4890.00	53.87	54.00	-0.13	V	AVERAGE	Pass	Harmonic

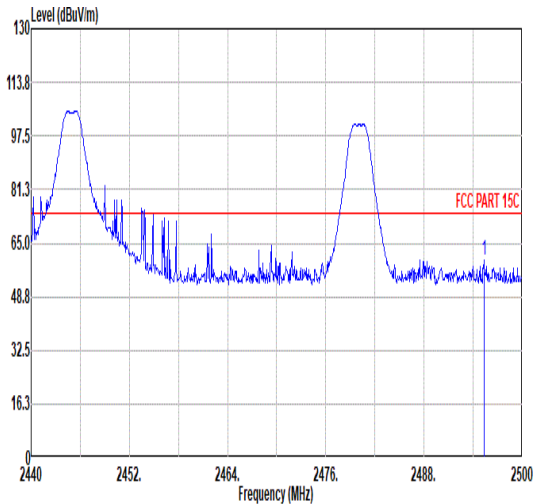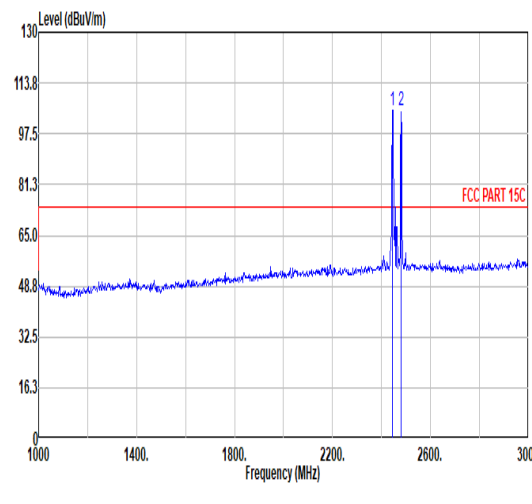
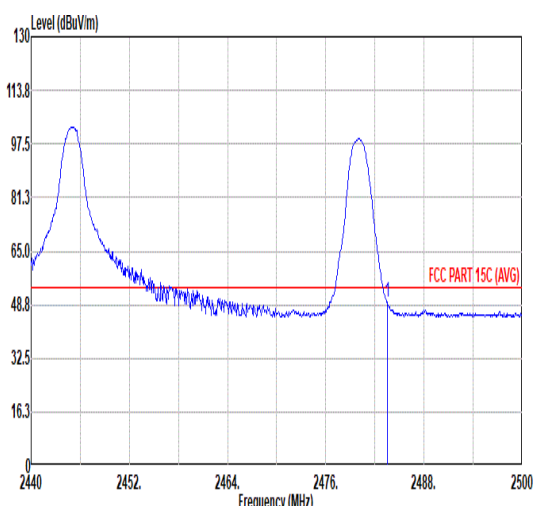
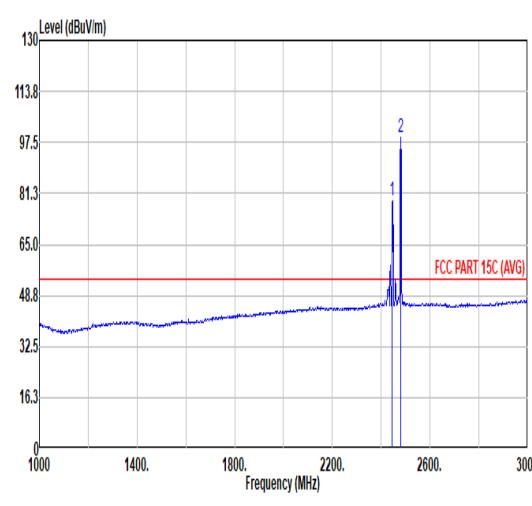


		6																																																																			
Mode		Band Edge																																																																			
		2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																			
ANT		1																																																																			
Pol.		Horizontal																																																																			
Peak																																																																					
		<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2495.32</td><td>60.09</td><td>74.00</td><td>-13.91</td><td>46.91</td><td>32.67</td><td>6.75</td><td>32.24</td><td>6.00</td><td>100</td><td>48 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2495.32	60.09	74.00	-13.91	46.91	32.67	6.75	32.24	6.00	100	48 PEAK												
			Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																											
1	2495.32	60.09	74.00	-13.91	46.91	32.67	6.75	32.24	6.00	100	48 PEAK																																																										
Fundamental																																																																					
		<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2445.00</td><td>105.18</td><td>-----</td><td>-----</td><td>92.29</td><td>32.42</td><td>6.68</td><td>32.21</td><td>6.00</td><td>100</td><td>48 Peak</td></tr><tr><td>2</td><td>2480.00</td><td>105.18</td><td>-----</td><td>-----</td><td>92.29</td><td>32.42</td><td>6.68</td><td>32.21</td><td>6.00</td><td>100</td><td>48 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2445.00	105.18	-----	-----	92.29	32.42	6.68	32.21	6.00	100	48 Peak	2	2480.00	105.18	-----	-----	92.29	32.42	6.68	32.21	6.00	100	48 PEAK
			Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																											
1	2445.00	105.18	-----	-----	92.29	32.42	6.68	32.21	6.00	100	48 Peak																																																										
2	2480.00	105.18	-----	-----	92.29	32.42	6.68	32.21	6.00	100	48 PEAK																																																										
Avg																																																																					
		<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>49.62</td><td>54.00</td><td>-4.38</td><td>36.52</td><td>32.60</td><td>6.73</td><td>32.23</td><td>6.00</td><td>100</td><td>48 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.50	49.62	54.00	-4.38	36.52	32.60	6.73	32.23	6.00	100	48 AVERAGE												
			Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																											
1	2483.50	49.62	54.00	-4.38	36.52	32.60	6.73	32.23	6.00	100	48 AVERAGE																																																										
Fundamental																																																																					
		<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2445.00</td><td>79.17</td><td>-----</td><td>-----</td><td>66.28</td><td>32.42</td><td>6.68</td><td>32.21</td><td>6.00</td><td>100</td><td>48 Average</td></tr><tr><td>2</td><td>2480.00</td><td>98.92</td><td>-----</td><td>-----</td><td>85.84</td><td>32.58</td><td>6.73</td><td>32.23</td><td>6.00</td><td>100</td><td>48 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2445.00	79.17	-----	-----	66.28	32.42	6.68	32.21	6.00	100	48 Average	2	2480.00	98.92	-----	-----	85.84	32.58	6.73	32.23	6.00	100	48 AVERAGE
			Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																											
1	2445.00	79.17	-----	-----	66.28	32.42	6.68	32.21	6.00	100	48 Average																																																										
2	2480.00	98.92	-----	-----	85.84	32.58	6.73	32.23	6.00	100	48 AVERAGE																																																										

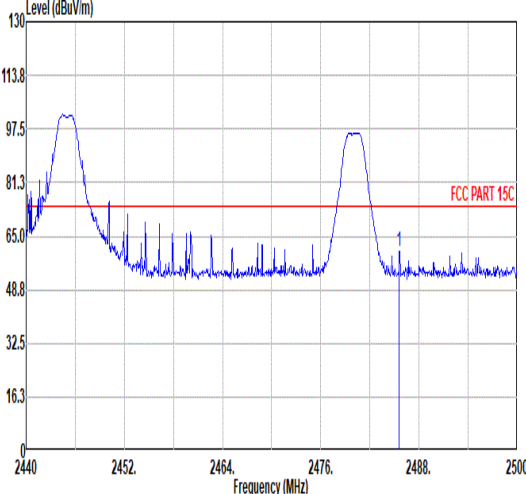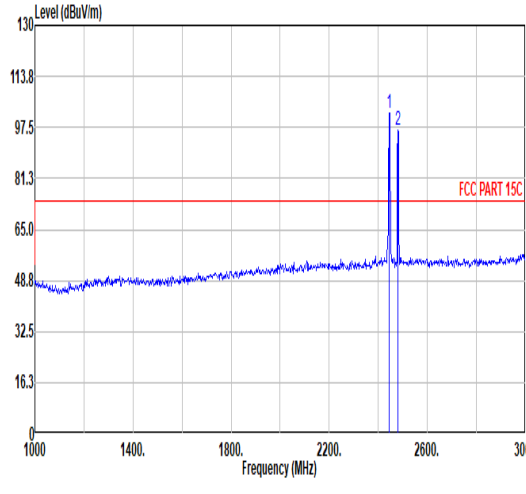
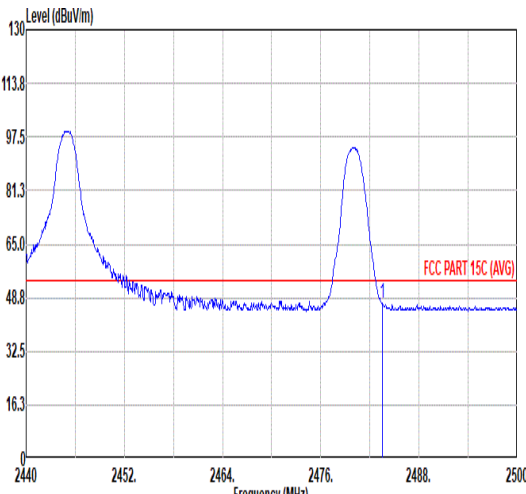
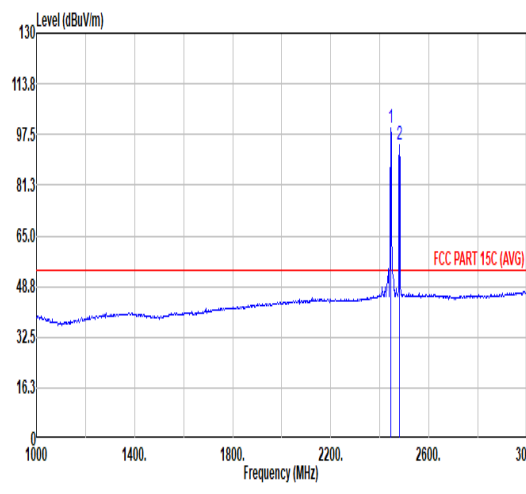


Mode	6																																																																																																																			
	Band Edge																																																																																																																			
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																																			
ANT	1																																																																																																																			
Pol.	Vertical						Fundamental																																																																																																													
Peak																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.60</td><td>60.29</td><td>74.00</td><td>-13.71</td><td>47.17</td><td>32.61</td><td>6.74</td><td>32.23</td><td>6.00</td><td>100</td><td>77</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2485.60	60.29	74.00	-13.71	47.17	32.61	6.74	32.23	6.00	100	77	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2445.00</td><td>102.05</td><td>-----</td><td>89.16</td><td>32.42</td><td>6.68</td><td>32.21</td><td>6.00</td><td>100</td><td>77</td><td>Peak</td></tr><tr><td>2</td><td>2480.00</td><td>96.48</td><td>-----</td><td>83.40</td><td>32.58</td><td>6.73</td><td>32.23</td><td>6.00</td><td>100</td><td>77</td><td>Peak</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2445.00	102.05	-----	89.16	32.42	6.68	32.21	6.00	100	77	Peak	2	2480.00	96.48	-----	83.40	32.58	6.73	32.23	6.00	100	77
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																									
1	2485.60	60.29	74.00	-13.71	47.17	32.61	6.74	32.23	6.00	100	77	PEAK																																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																									
1	2445.00	102.05	-----	89.16	32.42	6.68	32.21	6.00	100	77	Peak																																																																																																									
2	2480.00	96.48	-----	83.40	32.58	6.73	32.23	6.00	100	77	Peak																																																																																																									
Avg																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>46.92</td><td>54.00</td><td>-7.08</td><td>33.82</td><td>32.60</td><td>6.73</td><td>32.23</td><td>6.00</td><td>100</td><td>77</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.50	46.92	54.00	-7.08	33.82	32.60	6.73	32.23	6.00	100	77	AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2445.00</td><td>99.40</td><td>-----</td><td>86.51</td><td>32.42</td><td>6.68</td><td>32.21</td><td>6.00</td><td>100</td><td>77</td><td>Average</td></tr><tr><td>2</td><td>2480.00</td><td>94.24</td><td>-----</td><td>81.16</td><td>32.58</td><td>6.73</td><td>32.23</td><td>6.00</td><td>100</td><td>77</td><td>Average</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2445.00	99.40	-----	86.51	32.42	6.68	32.21	6.00	100	77	Average	2	2480.00	94.24	-----	81.16	32.58	6.73	32.23	6.00	100	77
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																									
1	2483.50	46.92	54.00	-7.08	33.82	32.60	6.73	32.23	6.00	100	77	AVERAGE																																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																									
1	2445.00	99.40	-----	86.51	32.42	6.68	32.21	6.00	100	77	Average																																																																																																									
2	2480.00	94.24	-----	81.16	32.58	6.73	32.23	6.00	100	77	Average																																																																																																									

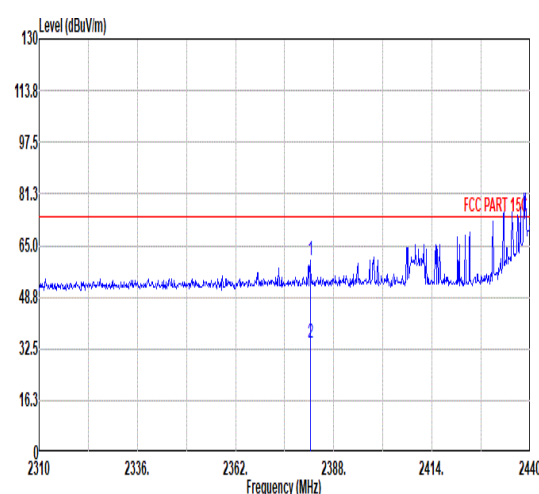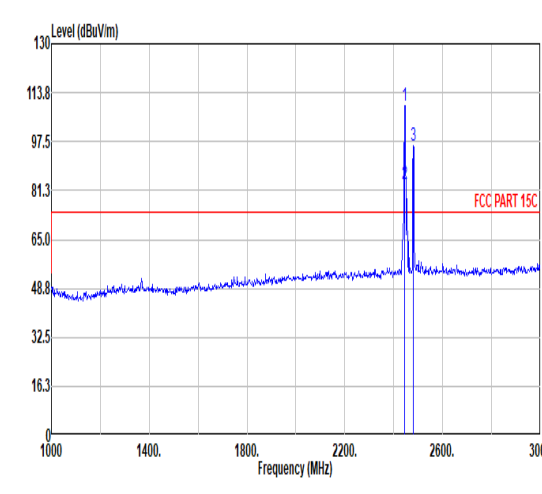
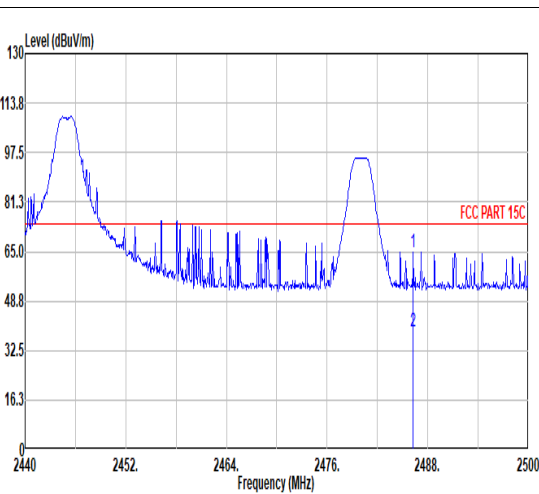


Mode	6																																																																														
	Band Edge - L																																																																														
	2400-2483.5_Zigbee_CH19_2445MHz																																																																														
ANT	2																																																																														
Pol.	Horizontal																																																																														
Peak																																																																															
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2381.76</td><td>60.12</td><td>74.00</td><td>-13.88</td><td>47.34</td><td>32.38</td><td>6.59</td><td>32.19</td><td>6.00</td><td>100</td><td>77 PEAK</td></tr><tr><td>2</td><td>2381.76</td><td>34.19</td><td>54.00</td><td>-19.81</td><td>21.41</td><td>32.38</td><td>6.59</td><td>32.19</td><td>6.00</td><td>100</td><td>77 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2381.76	60.12	74.00	-13.88	47.34	32.38	6.59	32.19	6.00	100	77 PEAK	2	2381.76	34.19	54.00	-19.81	21.41	32.38	6.59	32.19	6.00	100	77 AVERAGE											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2381.76	60.12	74.00	-13.88	47.34	32.38	6.59	32.19	6.00	100	77 PEAK																																																																				
2	2381.76	34.19	54.00	-19.81	21.41	32.38	6.59	32.19	6.00	100	77 AVERAGE																																																																				
Peak																																																																															
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2445.00</td><td>109.34</td><td>-----</td><td>-----</td><td>96.45</td><td>32.42</td><td>6.68</td><td>32.21</td><td>6.00</td><td>100</td><td>77 PEAK</td></tr><tr><td>2</td><td>2445.00</td><td>83.41</td><td>-----</td><td>-----</td><td>70.52</td><td>32.42</td><td>6.68</td><td>32.21</td><td>6.00</td><td>100</td><td>77 AVERAGE</td></tr><tr><td>3</td><td>2480.00</td><td>96.09</td><td>-----</td><td>-----</td><td>83.01</td><td>32.58</td><td>6.73</td><td>32.23</td><td>6.00</td><td>100</td><td>77 Peak</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2445.00	109.34	-----	-----	96.45	32.42	6.68	32.21	6.00	100	77 PEAK	2	2445.00	83.41	-----	-----	70.52	32.42	6.68	32.21	6.00	100	77 AVERAGE	3	2480.00	96.09	-----	-----	83.01	32.58	6.73	32.23	6.00	100
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2445.00	109.34	-----	-----	96.45	32.42	6.68	32.21	6.00	100	77 PEAK																																																																				
2	2445.00	83.41	-----	-----	70.52	32.42	6.68	32.21	6.00	100	77 AVERAGE																																																																				
3	2480.00	96.09	-----	-----	83.01	32.58	6.73	32.23	6.00	100	77 Peak																																																																				
Peak																																																																															
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.26</td><td>64.89</td><td>74.00</td><td>-9.11</td><td>51.77</td><td>32.62</td><td>6.74</td><td>32.24</td><td>6.00</td><td>100</td><td>77 PEAK</td></tr><tr><td>2</td><td>2486.26</td><td>38.96</td><td>54.00</td><td>-15.04</td><td>25.84</td><td>32.62</td><td>6.74</td><td>32.24</td><td>6.00</td><td>100</td><td>77 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.26	64.89	74.00	-9.11	51.77	32.62	6.74	32.24	6.00	100	77 PEAK	2	2486.26	38.96	54.00	-15.04	25.84	32.62	6.74	32.24	6.00	100	77 AVERAGE											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	2486.26	64.89	74.00	-9.11	51.77	32.62	6.74	32.24	6.00	100	77 PEAK																																																																				
2	2486.26	38.96	54.00	-15.04	25.84	32.62	6.74	32.24	6.00	100	77 AVERAGE																																																																				

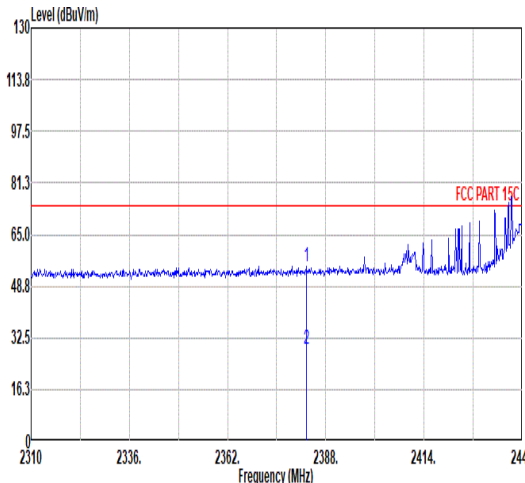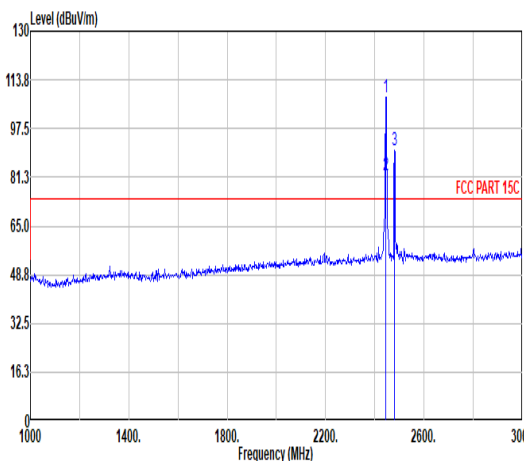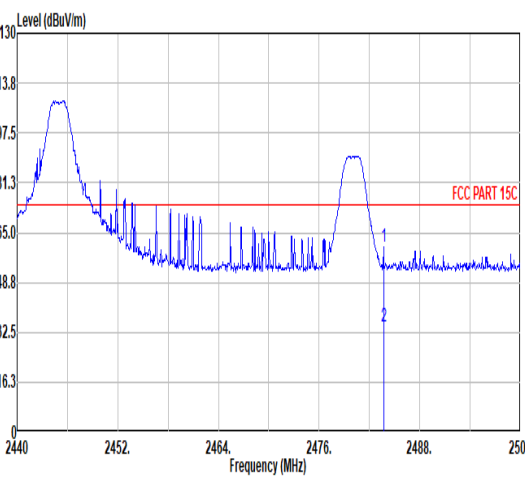

Mode	6																																																																																																																																								
	Band Edge - L																																																																																																																																								
	2400-2483.5_Zigbee_CH19_2445MHz																																																																																																																																								
ANT	2																																																																																																																																								
Pol.	Vertical						Fundamental																																																																																																																																		
Peak																																																																																																																																									
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2382.93</td><td>54.91</td><td>74.00</td><td>-19.09</td><td>42.11</td><td>32.40</td><td>6.59</td><td>32.19</td><td>6.00</td><td>371</td><td>147 PEAK</td></tr><tr><td>2</td><td>2382.93</td><td>28.98</td><td>54.00</td><td>-25.02</td><td>16.18</td><td>32.40</td><td>6.59</td><td>32.19</td><td>6.00</td><td>371</td><td>147 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2382.93	54.91	74.00	-19.09	42.11	32.40	6.59	32.19	6.00	371	147 PEAK	2	2382.93	28.98	54.00	-25.02	16.18	32.40	6.59	32.19	6.00	371	147 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2445.00</td><td>107.99</td><td>-----</td><td>-----</td><td>95.10</td><td>32.42</td><td>6.68</td><td>32.21</td><td>6.00</td><td>371</td><td>147 PEAK</td></tr><tr><td>2</td><td>2445.00</td><td>82.06</td><td>-----</td><td>-----</td><td>69.17</td><td>32.42</td><td>6.68</td><td>32.21</td><td>6.00</td><td>371</td><td>147 AVERAGE</td></tr><tr><td>3</td><td>2480.00</td><td>90.09</td><td>-----</td><td>-----</td><td>77.01</td><td>32.58</td><td>6.73</td><td>32.23</td><td>6.00</td><td>371</td><td>147 Peak</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2445.00	107.99	-----	-----	95.10	32.42	6.68	32.21	6.00	371	147 PEAK	2	2445.00	82.06	-----	-----	69.17	32.42	6.68	32.21	6.00	371	147 AVERAGE	3	2480.00	90.09	-----	-----	77.01	32.58	6.73	32.23	6.00	371	147 Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																															
1	2382.93	54.91	74.00	-19.09	42.11	32.40	6.59	32.19	6.00	371	147 PEAK																																																																																																																														
2	2382.93	28.98	54.00	-25.02	16.18	32.40	6.59	32.19	6.00	371	147 AVERAGE																																																																																																																														
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																															
1	2445.00	107.99	-----	-----	95.10	32.42	6.68	32.21	6.00	371	147 PEAK																																																																																																																														
2	2445.00	82.06	-----	-----	69.17	32.42	6.68	32.21	6.00	371	147 AVERAGE																																																																																																																														
3	2480.00	90.09	-----	-----	77.01	32.58	6.73	32.23	6.00	371	147 Peak																																																																																																																														
Peak																																																																																																																																									
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.68</td><td>60.45</td><td>74.00</td><td>-13.55</td><td>47.35</td><td>32.60</td><td>6.73</td><td>32.23</td><td>6.00</td><td>371</td><td>147 PEAK</td></tr><tr><td>2</td><td>2483.68</td><td>34.52</td><td>54.00</td><td>-19.48</td><td>21.42</td><td>32.60</td><td>6.73</td><td>32.23</td><td>6.00</td><td>371</td><td>147 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.68	60.45	74.00	-13.55	47.35	32.60	6.73	32.23	6.00	371	147 PEAK	2	2483.68	34.52	54.00	-19.48	21.42	32.60	6.73	32.23	6.00	371	147 AVERAGE																																																																										
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																															
1	2483.68	60.45	74.00	-13.55	47.35	32.60	6.73	32.23	6.00	371	147 PEAK																																																																																																																														
2	2483.68	34.52	54.00	-19.48	21.42	32.60	6.73	32.23	6.00	371	147 AVERAGE																																																																																																																														

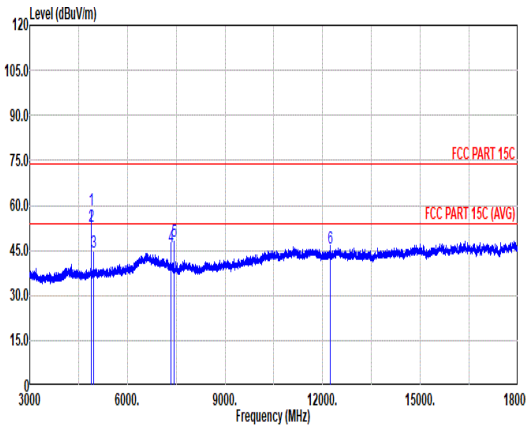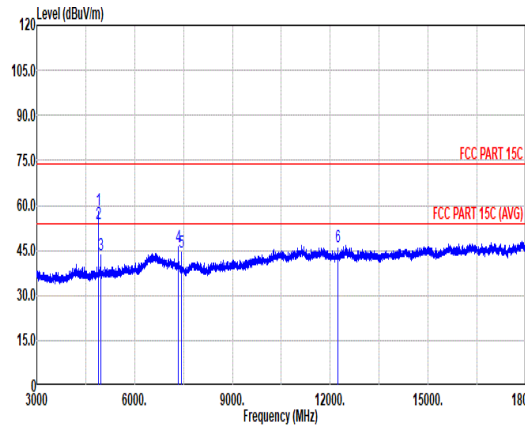


Mode	6																																																																																																																																																																																								
	Co-location Harmonic																																																																																																																																																																																								
ANT	1+2																																																																																																																																																																																								
Pol.	Horizontal					Vertical																																																																																																																																																																																			
Peak Avg																																																																																																																																																																																									
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>4890.00</td><td>58.38</td><td>74.00</td><td>-15.62</td><td>80.57</td><td>34.12</td><td>9.54</td><td>65.85</td><td>0.00</td><td>129 30 PEAK</td></tr><tr><td>2</td><td>4890.00</td><td>53.15</td><td>54.00</td><td>-0.85</td><td>75.34</td><td>34.12</td><td>9.54</td><td>65.85</td><td>0.00</td><td>129 30 AVERAGE</td></tr><tr><td>3</td><td>4960.50</td><td>44.27</td><td>74.00</td><td>-29.73</td><td>66.40</td><td>34.00</td><td>9.61</td><td>65.74</td><td>0.00</td><td>--- --- Peak</td></tr><tr><td>4</td><td>7335.00</td><td>46.20</td><td>74.00</td><td>-27.80</td><td>64.05</td><td>35.70</td><td>11.70</td><td>65.25</td><td>0.00</td><td>--- --- Peak</td></tr><tr><td>5</td><td>7441.50</td><td>47.88</td><td>74.00</td><td>-26.12</td><td>65.97</td><td>35.70</td><td>11.78</td><td>65.57</td><td>0.00</td><td>--- --- Peak</td></tr><tr><td>6</td><td>12225.00</td><td>45.62</td><td>74.00</td><td>-28.38</td><td>56.25</td><td>38.80</td><td>15.45</td><td>64.88</td><td>0.00</td><td>--- --- PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	1	4890.00	58.38	74.00	-15.62	80.57	34.12	9.54	65.85	0.00	129 30 PEAK	2	4890.00	53.15	54.00	-0.85	75.34	34.12	9.54	65.85	0.00	129 30 AVERAGE	3	4960.50	44.27	74.00	-29.73	66.40	34.00	9.61	65.74	0.00	--- --- Peak	4	7335.00	46.20	74.00	-27.80	64.05	35.70	11.70	65.25	0.00	--- --- Peak	5	7441.50	47.88	74.00	-26.12	65.97	35.70	11.78	65.57	0.00	--- --- Peak	6	12225.00	45.62	74.00	-28.38	56.25	38.80	15.45	64.88	0.00	--- --- PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>4890.00</td><td>58.35</td><td>74.00</td><td>-15.65</td><td>80.54</td><td>34.12</td><td>9.54</td><td>65.85</td><td>0.00</td><td>100 76 PEAK</td></tr><tr><td>2</td><td>4890.00</td><td>53.87</td><td>54.00</td><td>-0.13</td><td>76.06</td><td>34.12</td><td>9.54</td><td>65.85</td><td>0.00</td><td>100 76 AVERAGE</td></tr><tr><td>3</td><td>4962.00</td><td>43.54</td><td>74.00</td><td>-30.46</td><td>65.67</td><td>34.00</td><td>9.61</td><td>65.74</td><td>0.00</td><td>--- --- Peak</td></tr><tr><td>4</td><td>7333.50</td><td>46.05</td><td>74.00</td><td>-27.95</td><td>63.09</td><td>35.70</td><td>11.70</td><td>65.24</td><td>0.00</td><td>--- --- Peak</td></tr><tr><td>5</td><td>7438.50</td><td>44.16</td><td>74.00</td><td>-29.84</td><td>62.25</td><td>35.70</td><td>11.77</td><td>65.56</td><td>0.00</td><td>--- --- Peak</td></tr><tr><td>6</td><td>12225.00</td><td>46.22</td><td>74.00</td><td>-27.78</td><td>56.85</td><td>38.80</td><td>15.45</td><td>64.88</td><td>0.00</td><td>--- --- PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	1	4890.00	58.35	74.00	-15.65	80.54	34.12	9.54	65.85	0.00	100 76 PEAK	2	4890.00	53.87	54.00	-0.13	76.06	34.12	9.54	65.85	0.00	100 76 AVERAGE	3	4962.00	43.54	74.00	-30.46	65.67	34.00	9.61	65.74	0.00	--- --- Peak	4	7333.50	46.05	74.00	-27.95	63.09	35.70	11.70	65.24	0.00	--- --- Peak	5	7438.50	44.16	74.00	-29.84	62.25	35.70	11.77	65.56	0.00	--- --- Peak	6	12225.00	46.22	74.00	-27.78	56.85	38.80	15.45	64.88	0.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																																															
1	4890.00	58.38	74.00	-15.62	80.57	34.12	9.54	65.85	0.00	129 30 PEAK																																																																																																																																																																															
2	4890.00	53.15	54.00	-0.85	75.34	34.12	9.54	65.85	0.00	129 30 AVERAGE																																																																																																																																																																															
3	4960.50	44.27	74.00	-29.73	66.40	34.00	9.61	65.74	0.00	--- --- Peak																																																																																																																																																																															
4	7335.00	46.20	74.00	-27.80	64.05	35.70	11.70	65.25	0.00	--- --- Peak																																																																																																																																																																															
5	7441.50	47.88	74.00	-26.12	65.97	35.70	11.78	65.57	0.00	--- --- Peak																																																																																																																																																																															
6	12225.00	45.62	74.00	-28.38	56.25	38.80	15.45	64.88	0.00	--- --- PEAK																																																																																																																																																																															
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																																															
1	4890.00	58.35	74.00	-15.65	80.54	34.12	9.54	65.85	0.00	100 76 PEAK																																																																																																																																																																															
2	4890.00	53.87	54.00	-0.13	76.06	34.12	9.54	65.85	0.00	100 76 AVERAGE																																																																																																																																																																															
3	4962.00	43.54	74.00	-30.46	65.67	34.00	9.61	65.74	0.00	--- --- Peak																																																																																																																																																																															
4	7333.50	46.05	74.00	-27.95	63.09	35.70	11.70	65.24	0.00	--- --- Peak																																																																																																																																																																															
5	7438.50	44.16	74.00	-29.84	62.25	35.70	11.77	65.56	0.00	--- --- Peak																																																																																																																																																																															
6	12225.00	46.22	74.00	-27.78	56.85	38.80	15.45	64.88	0.00	--- --- PEAK																																																																																																																																																																															

Note: For all the above plots, the frequency points over limit line are fundamental signals, which can be ignored.

Appendix D. Duty Cycle Plots

Zigbee mode

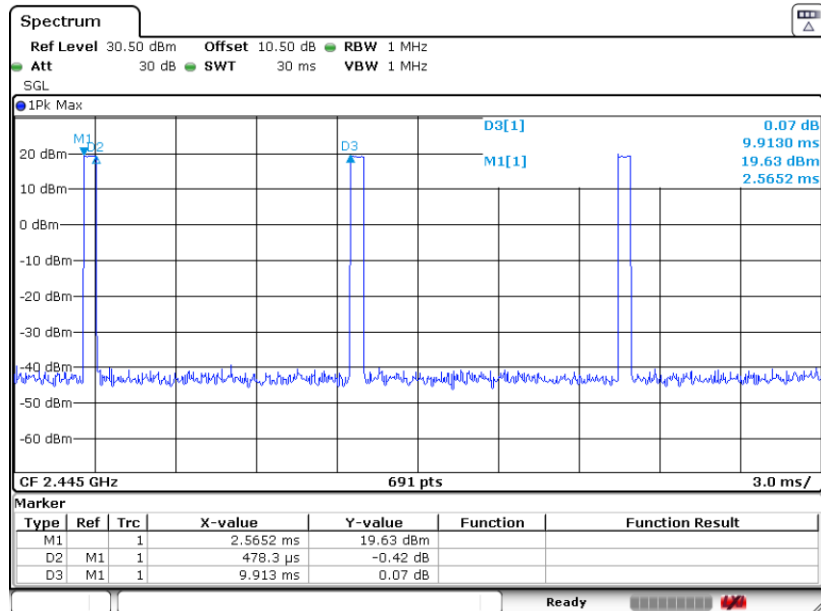

Note:

Duty cycle = $Tx_{on} / Tx_{(on+off)} = 0.4783 \text{ (ms)} / 9.913 \text{ (ms)} = 4.82 \%$

Duty cycle correction factor = $20 \cdot \log(1/\text{Duty cycle}) = 26.33 \text{ dB}$