



APPENDIX 1: Photographs of EUT and SAR test setup

Appendix 1-1: Photograph of EUT and an antenna position

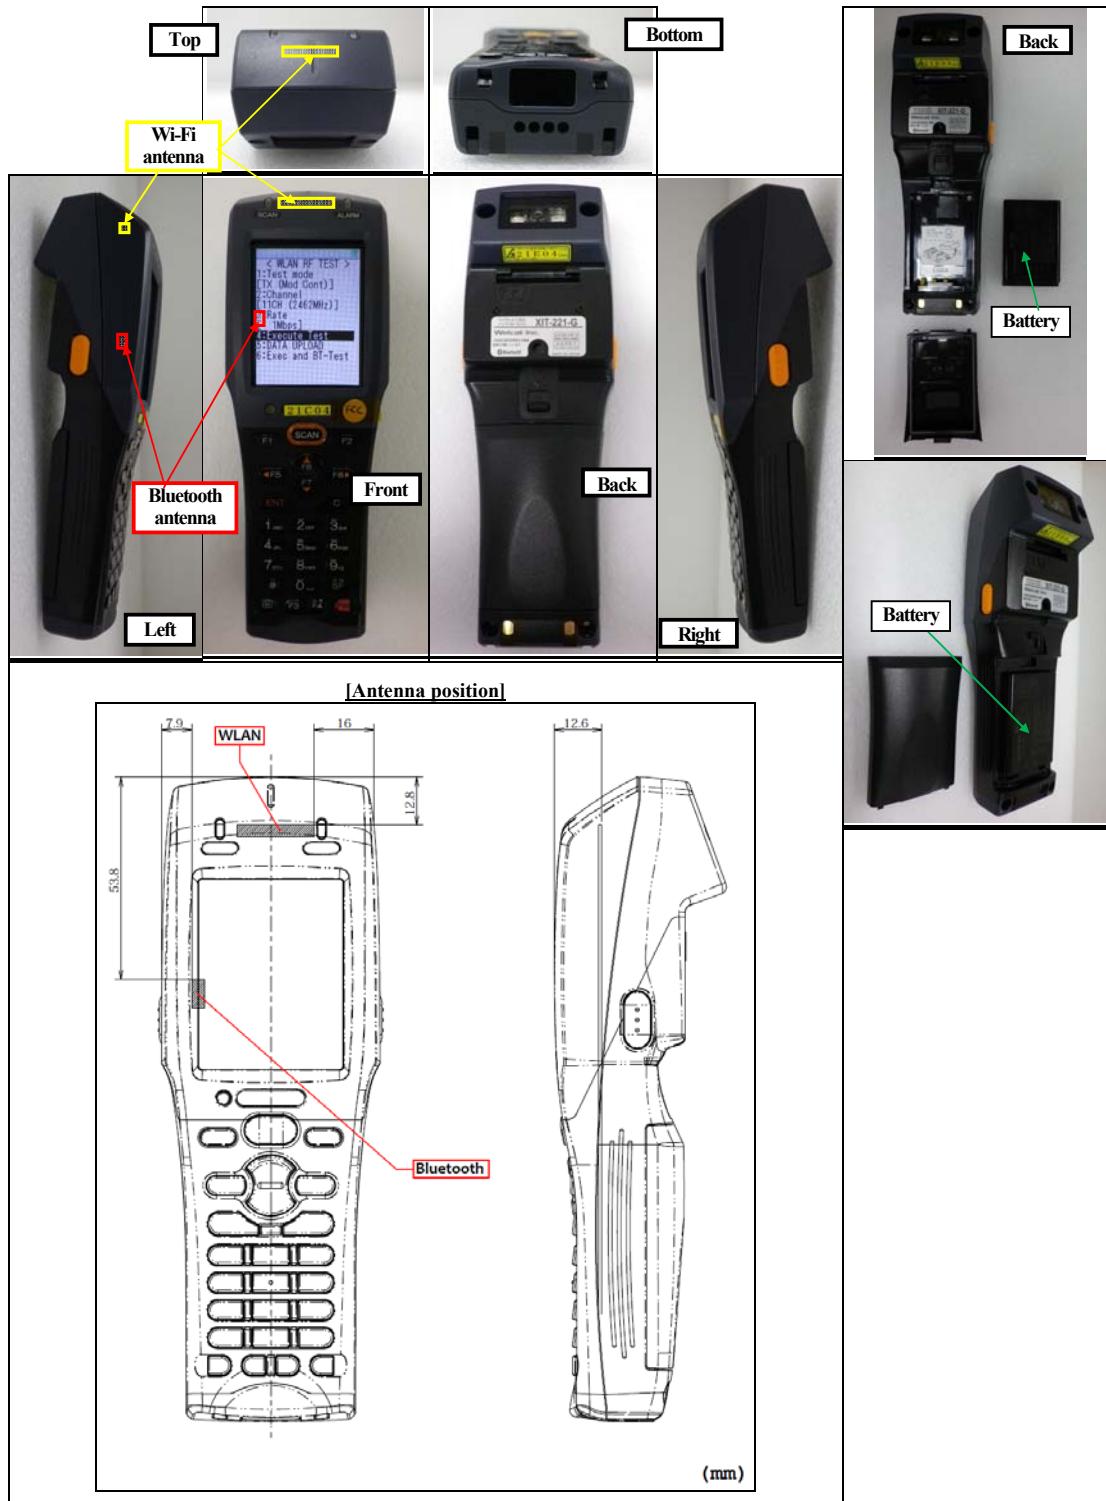

Appendix 1-2: EUT and support equipment

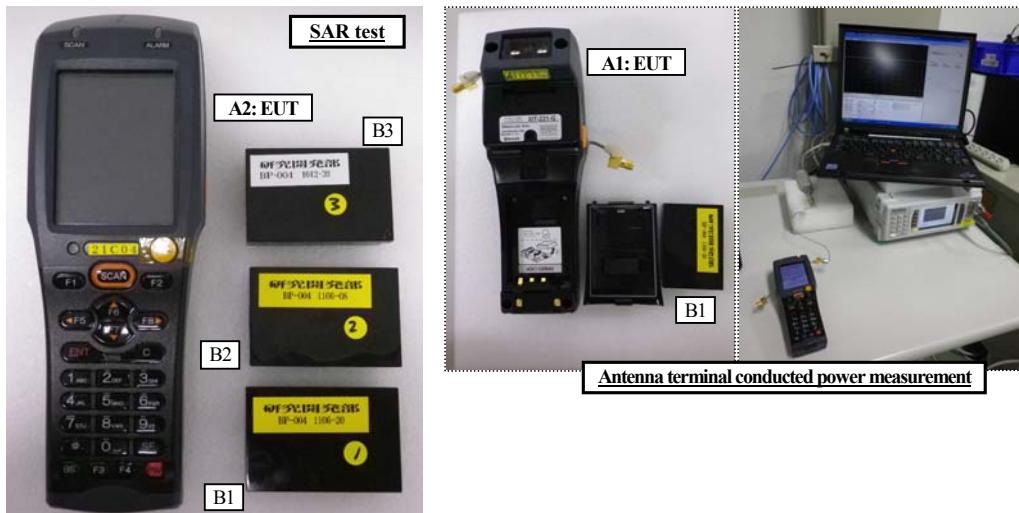

Description of EUT and Support Equipment

No.	Item	Model number	Serial number	Manufacturer	Remark
A1	Wireless 2D-code Handy Terminal	GTX-221-G	21C15	Welcat Inc.	EUT. (*. For antenna terminal power.)
A2			21C04	Welcat Inc.	EUT. (*. For SAR test.)
* The EUT of A1 and A2 were equipped with the following RF modules.					
-	Wi-Fi RF module	WM-G-MR-09	Lot No.1214	USI	EUT.
-	Bluetooth RF module	FC04UAB-C	lot No.1208	Kyocera	EUT.
B1	Li-ion Battery		1106-20		Accessory of EUT, Battery No. #1.
B2	Li-ion Battery (DC3.7V typical, 1800mAh, 6.7Wh)	BP-004	1106-08	Welcat Inc.	Accessory of EUT, Battery No. #2.
B3			1012-39		Accessory of EUT, Battery No. #3.

Option accessory of EUT

EUT accessories which influence SAR test

1) Portable holder

(It is shown in the right drawing and the photograph in below. Thickness is 3 mm. This is nonmetallic and does not make an SAR value increase.)




2) Impact-resistant protective cover

(It is shown in the right drawing. This is nonmetallic and does not make an SAR value increase.)

* In the SAR test, accessories were not used
 but it carried out in the state of contact
 condition as the conservative setup.

Product Configuration

The basic product configuration for the Handy Terminal is given below. Please ensure that the necessary accessories are available.

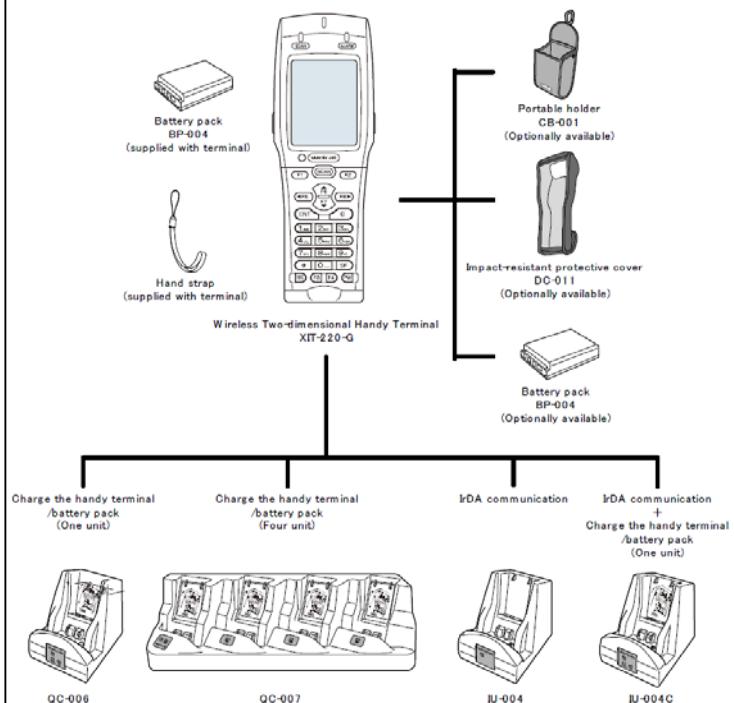

**UL Japan, Inc.
 Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN
 Telephone: +81 463 50 6400 / Facsimile: +81 463 50 6401

Appendix 1-3: Photograph of test setup

Position	Setup photographs		
Front (Touch)			
Top-front (Touch) Wi-Fi Worst position			
Left (Touch) Bluetooth Worst position			

Appendix 1-3: Photograph of test setup (cont'd)

Position	Setup photographs		
Right (Touch)			
			
Back (Touch)			
	