

Test of Aruba AP-104 802.11a/b/g/n Wireless AP

To: FCC 47 CFR Part 15.407 & IC RSS-210

Test Report Serial No.: ARUB100-U1 Rev A



TEST REPORT

FROM



Test of Aruba AP-104 802.11a/b/g/n Wireless AP
to

To: FCC 47 CFR Part 15.407 & IC RSS-210

Test Report Serial No.: ARUB100-U1 Rev A

Note: this report contains data with regard to the 5,150 to 5,250 MHz band for the Aruba Networks AP-104 Wireless Access Point. Results for testing in the 2.4 and 5.8 GHz bands is reported in MiCOM Labs test report ARUB99-U2, and for the 5150 -5250 MHz band is reported in MiCOM labs test report ARUB99-U3.

This report supersedes: MiCOM Labs Inc Report NONE

Applicant: Aruba Networks, Inc
1344 Crossman Avenue
Sunnyvale
CA 94089, USA

Product Function: Wireless LAN Access Point

Copy No: pdf Issue Date: 14th June 2012

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.

440 Boulder Court, Suite 200

Pleasanton, CA 94566 USA

Phone: +1 (925) 462-0304

Fax: +1 (925) 462-0306

www.micomlabs.com



TEST CERTIFICATE #2381.01

MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 3 of 186

This page has been left intentionally blank

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF CONTENTS

ACCREDITATION, LISTINGS & RECOGNITION	5
RECOGNITION.....	6
PRODUCT CERTIFICATION.....	7
1. TEST RESULT CERTIFICATE	9
2. REFERENCES AND MEASUREMENT UNCERTAINTY	10
2.1. Normative References	10
2.2. Test and Uncertainty Procedures	11
3. PRODUCT DETAILS AND TEST CONFIGURATIONS	12
3.1. Technical Details	12
3.2. Scope of Test Program.....	13
3.3. Equipment Model(s) and Serial Number(s)	14
3.4. Antenna Details	14
3.5. Cabling and I/O Ports	15
3.6. Deviations from the Test Standard	15
3.7. Subcontracted Testing or Third Party Data	15
3.8. Test Configurations.....	16
3.9. Equipment Modifications.....	17
4. TEST SUMMARY	18
5. TEST RESULTS	20
5.1. Device Characteristics	20
5.1.1. <i>26 dB and 99 % Bandwidth</i>	20
5.1.2. <i>Transmit Output Power</i>	45
5.1.3. <i>Peak Power Spectral Density</i>	56
5.1.4. <i>Peak Excursion Ratio</i>	81
5.1.5. <i>Frequency Stability</i>	106
5.1.6. <i>Maximum Permissible Exposure</i>	107
5.1.7. <i>Radiated Emissions</i>	108
5.1.8. <i>AC Wireline Conducted Emissions (150 kHz – 30 MHz)</i>	178
6. PHOTOGRAPHS.....	181
6.1. Radiated Emissions > 1GHz.....	181
6.2. Radiated Emissions < 1GHz.....	182
6.3. AC Wireline Conducted Emissions	183
6.4. Conducted RF Measurement Test Set-Up	184
7. TEST EQUIPMENT DETAILS.....	185

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

ACCREDITATION, LISTINGS & RECOGNITION

ACCREDITATION

MiCOM Labs, Inc. an accredited laboratory complies with the international standard EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



The American Association for Laboratory Accreditation

World Class Accreditation

Accredited Laboratory

A2LA has accredited

MICOM LABS


Pleasanton, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 *General Requirements for the Competence of Testing and Calibration Laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Presented this 27th day of March 2012.



President & CEO
For the Accreditation Council
Certificate Number 2381.01
Valid to November 30, 2013

For the tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



RECOGNITION

MiCOM Labs, Inc has widely recognized Electrical testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA** countries. Our test reports are widely accepted for global type approvals.

Country	Recognition Body	Status	Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	Listing #: 4143A-2
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	APEC MRA 2	210
	VCCI	--	--	No. 2959
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

**APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement.
Is a recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

N/A – Not Applicable

**EU MRA – European Union Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the EU member countries.

**NB – Notified Body

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 7 of 186

PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard EN ISO/IEC Guide 65. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



The American Association for Laboratory Accreditation

Accredited Product Certification Body

A2LA has accredited

MICOM LABS

Pleasanton, CA

for technical competence as a

Product Certification Body

This product certification body is accredited in accordance with the recognized International Standard ISO/IEC Guide 65:1996 *General requirements for bodies operating product certification systems*. This accreditation demonstrates technical competence for a defined scope and the operation of a quality management system.

Presented this 27th day of March 2012.



President & CEO
For the Accreditation Council
Certificate Number 2381.02
Valid to November 30, 2013

For the product certification schemes to which this accreditation applies, please refer to the organization's Product Certification Scope of Accreditation

United States of America – Telecommunication Certification Body (TCB)

TCB Identifier – US0159

Industry Canada – Certification Body

CAB Identifier – US0159

Europe – Notified Body

Notified Body Identifier - 2280

Japan – Recognized Certification Body (RCB)

RCB Identifier - 210

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 8 of 186

DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft		
Rev A	14 th June 2012	Initial review.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 9 of 186

1. TEST RESULT CERTIFICATE

Applicant:	Aruba Networks, Inc 1344 Crossman Avenue Sunnyvale CA 94089, USA	Tested By:	MiCOM Labs, Inc. 440 Boulder Court Suite 200 Pleasanton California, 94566, USA
EUT:	Wireless LAN Access Point	Tel:	+1 925 462 0304
Model:	AP-104	Fax:	+1 925 462 0306
S/N:	BE0253435		
Test Date(s):	7th - 30th Jan 2012	Website:	www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC 47 CFR Part 15.407 & IC RSS-210	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.


Approved & Released for MiCOM Labs, Inc. by:



TEST CERTIFICATE #2381.01



Graeme Grieve
Quality Manager MiCOM Labs,



Gordon Hurst
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

2. REFERENCES AND MEASUREMENT UNCERTAINTY

2.1. Normative References

Ref.	Publication	Year	Title
(i)	FCC 47 CFR Part 15.407	2012	Code of Federal Regulations
(ii)	FCC 06-96	June 2006	Memorandum Opinion and Order
(iii)	Industry Canada RSS-210	2010	Low Power License-Exempt Radiocommunication Devices (All Frequency Bands): Category 1 Equipment
(iv)	Industry Canada RSS-Gen	2010	General Requirements and Information for the Certification of Radiocommunication Equipment
(v)	ANSI C63.4	2009	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
(vi)	CISPR 22/ EN 55022	2008 2006+A1:20 07	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
(vii)	M 3003	Edition 1 Dec. 1997	Expression of Uncertainty and Confidence in Measurements
(viii)	LAB34	Edition 1 Aug 2002	The expression of uncertainty in EMC Testing
(ix)	ETSI TR 100 028	2001	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
(x)	A2LA	March 2012	Reference to A2LA Accreditation Status – A2LA Advertising Policy
(xi)	FCC Public Notice – DA 02-2138	2002	Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 11 of 186

2.2. Test and Uncertainty Procedures

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 12 of 186

3. PRODUCT DETAILS AND TEST CONFIGURATIONS

3.1. Technical Details

Details	Description
Purpose:	Test of the Aruba AP-104 802.11a/b/g/n Wireless AP in the frequency ranges 5250 to 5350 MHz and 5470 - 5725 MHz to FCC Part 15.407 and Industry Canada RSS-210 regulations.
Applicant:	Aruba Networks, Inc 1344 Crossman Avenue Sunnyvale CA 94089, USA
Manufacturer:	As applicant
Laboratory performing the tests:	MiCOM Labs, Inc. 440 Boulder Court, Suite 200 Pleasanton, California 94566 USA
Test report reference number:	ARUB100-U1 Rev A
Date EUT received:	6 th January 2012
Standard(s) applied:	FCC 47 CFR Part 15.407 & IC RSS-210
Dates of test (from - to):	7th - 30th Jan 2012
No of Units Tested:	Two (separate units for conducted and radiated)
Type of Equipment:	802.11a/b/g/n Wireless Access Point, 2x2 Spatial Multiplexing MIMO configuration
Applicants Trade Name:	Wireless Access Point
Model(s):	AP-104
Software Release	ART version 09 build 07; Aruba OS 6.1.3
Location for use:	Indoor
Declared Frequency Range(s):	5250 - 5350 MHz & 5470 – 5725 MHz
Type of Modulation:	Per 802.11 –CCK, BPSK, QPSK, DSSS, OFDM
Declared Nominal Output Power: (Average Power)	802.11a: Legacy +19 dBm 802.11n: HT-20 +19 dBm 802.11n: HT-40 +19 dBm
EUT Modes of Operation:	Legacy 802.11a/b/g, 802.11n HT-20, HT-40
Transmit/Receive Operation:	Time Division Duplex
Rated Input Voltage and Current:	12Vdc 1.25A; POE 48 Vdc 350 mA
Operating Temperature Range:	Declared range 0 to +40°C
ITU Emission Designator:	5150 – 5250 MHz 802.11a 17M1D1D 5150 – 5250 MHz 802.11n HT-20 18M2D1D 5150 – 5250 MHz 802.11n HT-40 38M1D1D
Frequency Stability:	±20 ppm max
Equipment Dimensions:	132 X 135 X 45mm
Weight:	300 grams
Primary function of equipment:	Wireless Access Point for transmitting data and voice.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

3.2. Scope of Test Program

The scope of the test program was to test the AP-104 (external antennas) for compliance against the FCC CFR 47 Subpart 15, 15.407 and RSS-210 Annex 9 in the frequency bands 5250 – 5350 MHz and 5470 – 5725 MHz.

Aruba AP-104 Access Point

The AP-104 is a multi-band 802.11a/b/g/n dual-radio indoor wireless access point designed for dense enterprise deployments of 802.11n. The AP-104 delivers unprecedented value with the performance and reliability of 802.11n in a compact, streamlined 2x2 MIMO package. Capable of delivering wireless data rates of up to 300Mbps, the multifunction AP-104 provides wireless LAN access, air monitoring, and wireless intrusion detection and prevention over the 2.4GHz and 5GHz RF spectrum. The access point works in conjunction with Aruba's line of high-performance controllers to deliver high-speed, secure network services.

802.11n enables the use of wireless as a primary network connection with speed and reliability comparable to a wired LAN. 802.11n increases performance through techniques such as channel bonding, block acknowledgement, and Multiple In Multiple Out (MIMO). Advanced RF techniques such Cyclic Delay Diversity also increase range and reliability.

The AP-104 features a 100/1000Base-T Ethernet interface and operates from standard 802.3af Power over Ethernet (PoE) sources. Equipped with four external antenna ports, the AP-104 provides full RF diversity and 2x2 MIMO operation on both the 2.4GHz and 5GHz bands.

Aruba Networks AP-104



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



3.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description (Including Brand Name)	Mfr	Model No.	Serial No.
EUT	802.11a/b/g/n Wireless Access Point	Aruba Networks	AP-104	BE0253435
Support	Laptop PC	IBM	Thinkpad	None

3.4. Antenna Details

Model	Type	Gain (dBi)	Freq. Band (MHz)	Note
AP-ANT-1B	Omni	3.8	2400 - 2500	(4 x per unit)
		5.8	4900 - 5875	
AP-ANT-1F	Omni	2.8	2400-2500	(4 x per unit)
		4.5	5100-5900	
AP-ANT-8	Omni	5	2400-2500	(2 x per unit)
AP-ANT-10	Omni	6	5100-5900	(2 x per unit)
AP-ANT-13B	Omni	4.4	2400 - 2500	(2 x per unit)
		3.3	4900 - 5900	
AP-ANT-14	Omni	3	2400-2500	(1x per unit)
		3.6	4900-5990	MIMO
AP-ANT-16	Omni	3.9	2400 - 2500	(1x per unit)
		4.7	4900 - 5900	MIMO
AP-ANT-17	Directional	6	2400 - 2500	(1x per unit)
	120degr.	5	4900 - 5875	MIMO
AP-ANT-18	Directional	7	2400 - 2500	(1x per unit)
	60degr.	7.5	5150 - 5875	MIMO
AP-ANT-19	Omni	3	2400 - 2500	(2 x per unit)
		6	5150 - 5875	

Antenna's highlighted were the highest gain antenna tested as part of this test program. All other antennas were of equal or lower gain.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 15 of 186

3.5. Cabling and I/O Ports

Number and type of I/O ports

1. 10/100/1000 Ethernet
2. Console - Serial maintenance terminal
3. 12 Vdc, 4mm supply connector

3.6. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

3.7. Subcontracted Testing or Third Party Data

1. NONE

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



3.8. Test Configurations

Testing was performed to determine the highest power level versus bit rate. The variant with the highest power was used to exercise the product.

Matrix of test configurations

Operational Band(s) (MHz)	Variant Mode	Data Rates with Highest Power	Frequencies (MHz)
5250-5350 5470-5725	802.11a	6 MBit/s	5260,5280,5300,5320
	802.11n HT-20	6.5 MCS	5500,5580,5700
	802.11n HT-40	13.5 MCS	5270,5310 5510,5550,5690

Antenna Test Configurations for Radiated Emissions and Band-Edge

The following measurements were performed on all antenna configurations identified in Section 3.4 Antenna Details.

Spurious Emission and Band-Edge Test Strategy Band 5,250 – 5,350

11a	11n HT-20	11n HT-40
SE 5260	SE 5260	SE 5270
SE 5300	SE 5300	
SE 5320	SE 5320	SE 5310
BE 5350	BE 5350	BE 5350
Pk 5260	Pk 5260	Pk 5270
Pk 5300	Pk 5300	
Pk 5320	Pk 5320	Pk 5310

KEY:-

SE – Spurious Emissions

BE – Band-Edge

PK - Peak Emission

Band 5,470 – 5,725

11a	11n HT-20	11n HT-40
SE 5500	SE 5500	SE 5510
SE 5580	SE 5580	SE 5550
SE 5700	SE 5700	SE 5670
BE 5460	BE 5460	BE 5460
Pk 5500	Pk 5500	PK 5510
Pk 5580	Pk 5580	PK 5550
Pk 5700	Pk 5700	PK 5670

KEY:-

SE – Spurious Emissions

BE – Band-Edge

PK - Peak Emission

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



3.9. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

EUT Software Power Settings - Radiated Testing

1. Measurements were made using the highest gain antenna used with the AP-104, Antenna(s): AP-ANT-18; 7.5 dBi, AP-ANT-19; 6.0 dBi, 5150 – 5875 MHz band.

Configured Power Settings for Radiated Tests

Band/Mode	Antenna AP-ANT-18	Antenna AP-ANT-19
	ART Power Setting (dBm)	
5250-5350		
802.11a	+20.0	+20.0
802.11n HT20	+19.0	+20.0
802.11n HT40	+16.0	+18.0
5470-5725		
802.11a	+20.0	+20.0
802.11n HT20	+20.0	+20.0
802.11n HT40	+20.0	+19.0



4. TEST SUMMARY

List of Measurements

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407** and **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
15.407(a) A9.2(2) 4.4	26dB and 99% Emission BW	Emission bandwidth measurement	Conducted	Complies	5.1.1
15.407(a) A9.2(2) 4.6	Transmit Output Power	Power Measurement	Conducted	Complies	5.1.2
15.407(a) A9.2(2)	Peak Power Spectral Density	PPSD	Conducted	Complies	5.1.3
15.407(a)(6)	Peak Excursion Ratio	<13dB in any 1MHz bandwidth	Conducted	Complies	5.1.4
15.407(g) 15.31 2.1 4.5	Frequency Stability	Limits: contained within band of operation at all times.	Applicant declaration	Complies	5.1.5
15.407(f) 5.5	Radio Frequency Radiation Exposure	Exposure to radio frequency energy levels, Maximum Permissible Exposure (MPE)	Conducted	Complies	5.1.6

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



List of Measurements (continued)

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407** and **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
15.407(b)(2) 15.205(a) 15.209(a) 2.2 2.6 A9.3(2) 4.7	Radiated Emissions		Radiated		5.1.7
	Transmitter Radiated Spurious Emissions	Emissions above 1 GHz		Complies	5.1.7.1
	Radiated Band Edge	Band edge results		Complies	5.1.7.1
	Receiver Radiated Spurious Emissions	Emissions above 1 GHz		Complies	5.1.7.2
Industry Canada only RSS-Gen §4.10, §6 15.407(b)(6) 15.205(a) 15.209(a) 2.2	Radiated Emissions	Emissions <1 GHz (30M-1 GHz)		Complies	5.1.7.3
15.407(b)(6) 15.207 7.2.2	AC Wireline Conducted Emissions 150 kHz–30 MHz	Conducted Emissions	Conducted	Complies	5.1.8

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5. TEST RESULTS

5.1. Device Characteristics

5.1.1. 26 dB and 99 % Bandwidth


FCC, Part 15 Subpart C §15.407(a)

FCC, Part 15 Subpart C §15.407(a)
Industry Canada RSS-210 § A9.2(2)
Industry Canada RSS-Gen 4.4

Test Procedure

The bandwidth at 26 dB and 99 % is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

Test Measurement Set up

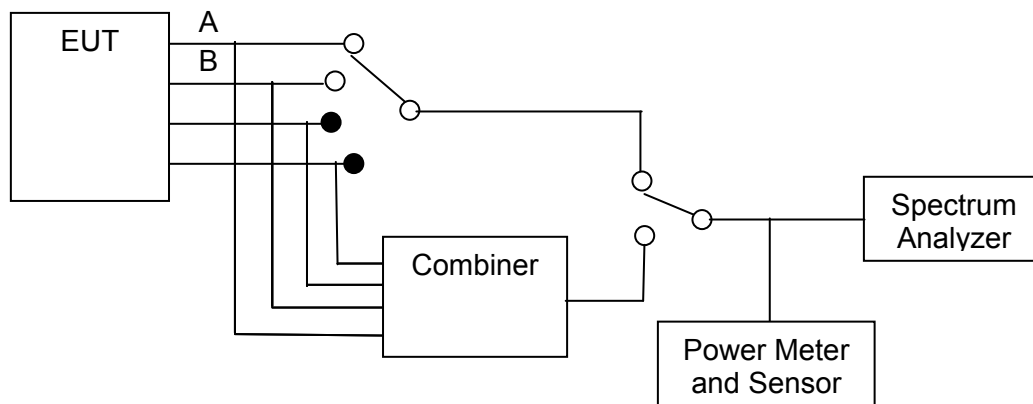

Measurement set up for 26 dB and 99 % bandwidth test

Radio Parameters

Duty Cycle: 100%

Output: Modulated Carrier

Power: Maximum Default Power



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 21 of 186

Measurement Results for 26 dB and 99 % Operational Bandwidth(s)

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

TABLE OF RESULTS – 802.11a Legacy 5250 – 5350 MHz

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35 to 42
Variant:	802.11a	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (x):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	6 dBi
Applied Voltage:	12.0 Vdc		
Notes 1:			
Notes 2:			

26 dB Bandwidth

Test Frequency	26 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz				kHz	MHz	
MHz	a	b	c	d			
5260	23.647000	24.749000	--	--	500	0.5	-23.147000
5300	23.647000	25.852000	--	--			-23.147000
5320	23.347000	24.950000	--	--			-22.847000

99% Bandwidth


Test Frequency	99 % Bandwidth					
	MHz					
MHz	a	b	c	d		
5260	16.934000	17.034000	--	--		
5300	16.934000	17.134000	--	--		
5320	16.934000	17.034000	--	--		

Measurement uncertainty:	±2.81 dB
---------------------------------	----------


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,260 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

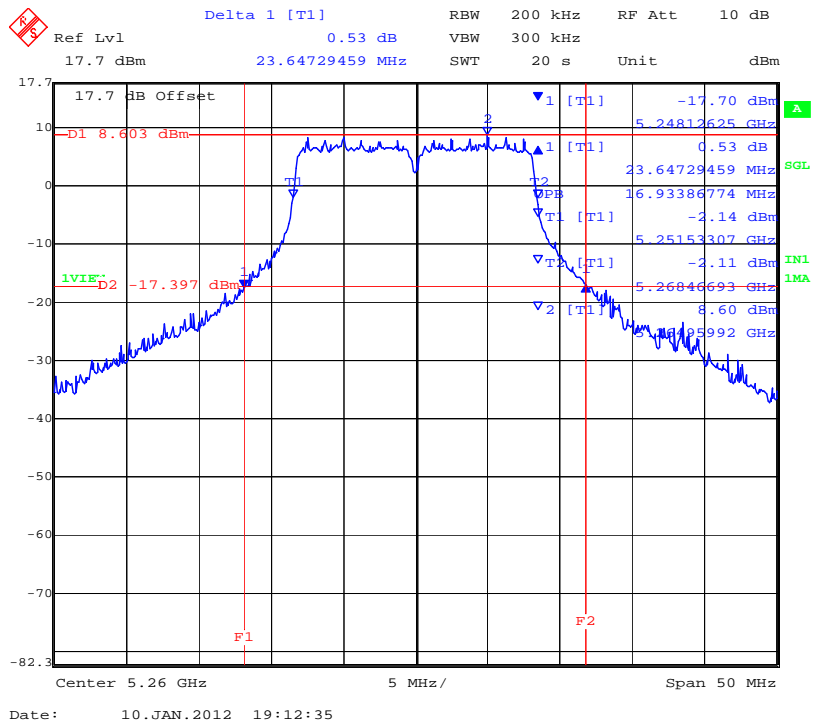


PORT B 5,260 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

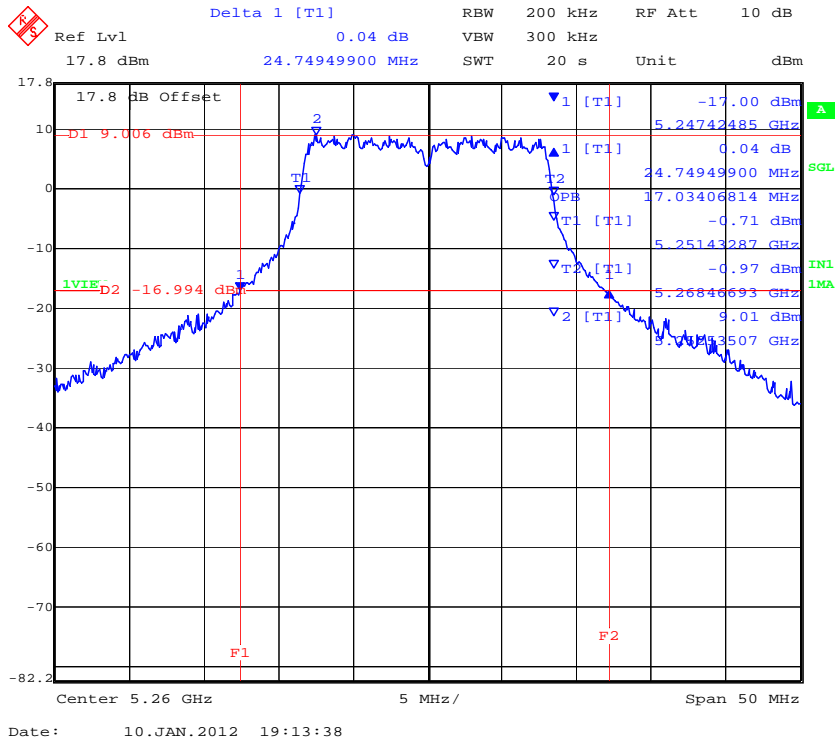


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,300 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

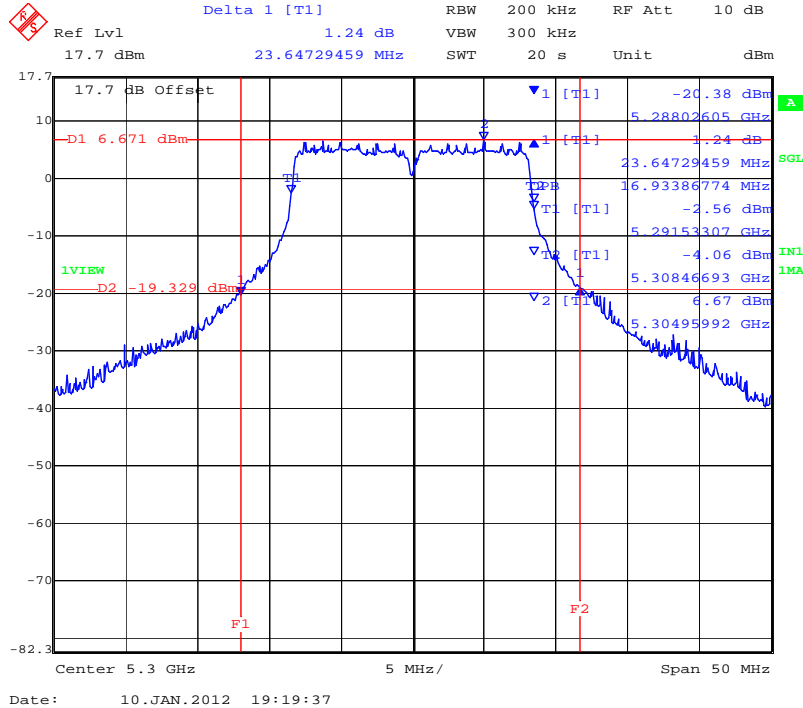


PORT B 5,300 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

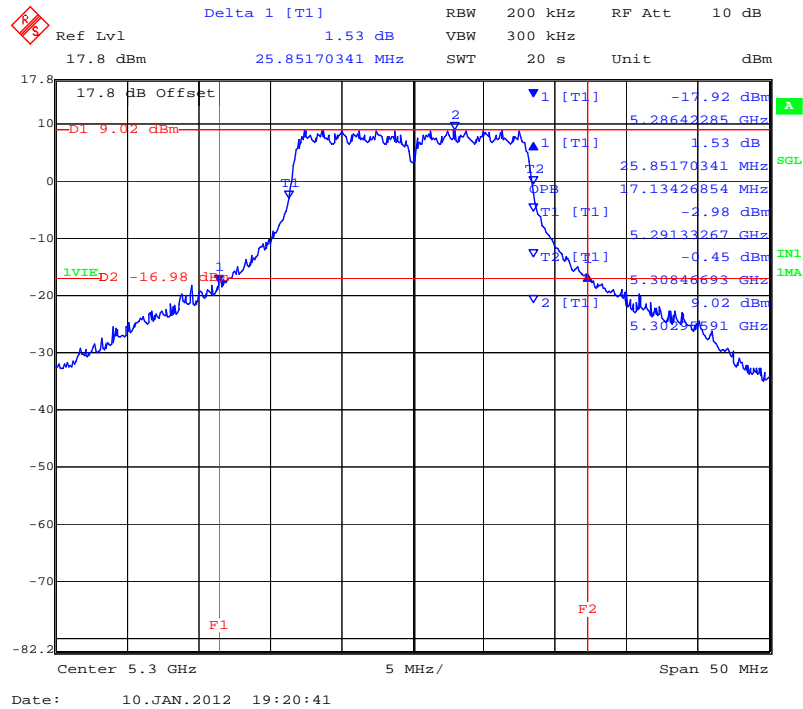


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,320 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

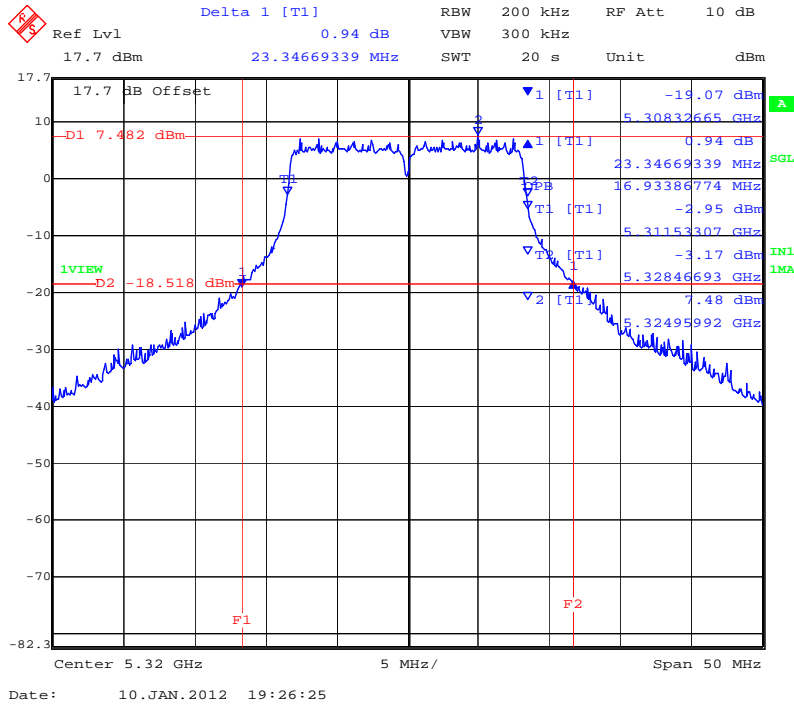

PORT B 5,320 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

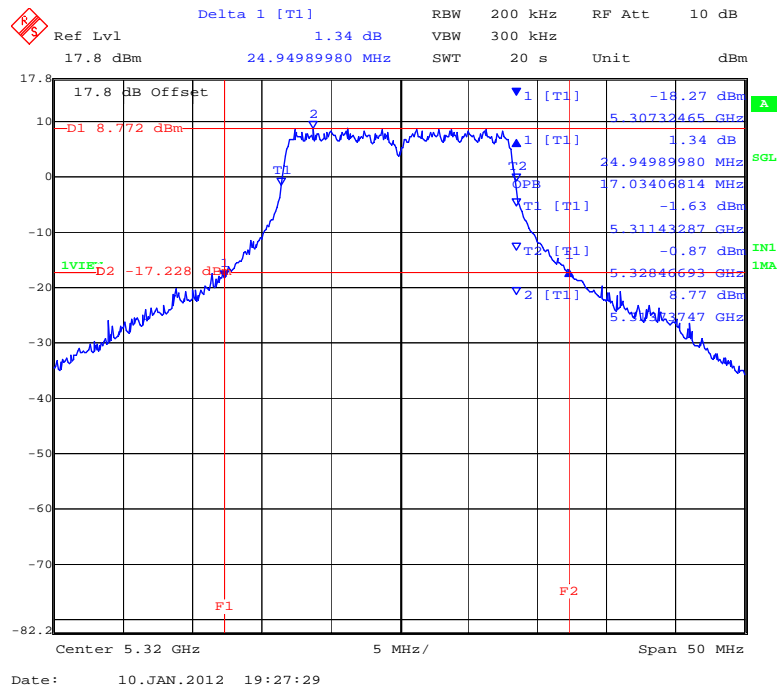

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 25 of 186

TABLE OF RESULTS – 802.11n HT-20 5250 – 5350 MHz

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35 to 42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (x):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	6 dBi
Applied Voltage:	12.0 Vdc		
Notes 1:			
Notes 2:			

26 dB Bandwidth

Test Frequency	26 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz				kHz	MHz	MHz
MHz	a	b	c	d			
5260	25.050000	24.850000	--	--	500	0.5	-24.350000
5300	25.050000	27.455000	--	--			-24.550000
5320	24.148000	25.451000	--	--			-23.648000

99% Bandwidth


Test Frequency	99 % Bandwidth					
	MHz					
MHz	a	b	c	d		
5260	18.136000	18.236000	--	--		
5300	18.136000	18.236000	--	--		
5320	18.036000	18.236000	--	--		

Measurement uncertainty:	±2.81 dB
---------------------------------	----------


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,260 MHz 802.11n HT-20 26 dB and 99 % Bandwidth

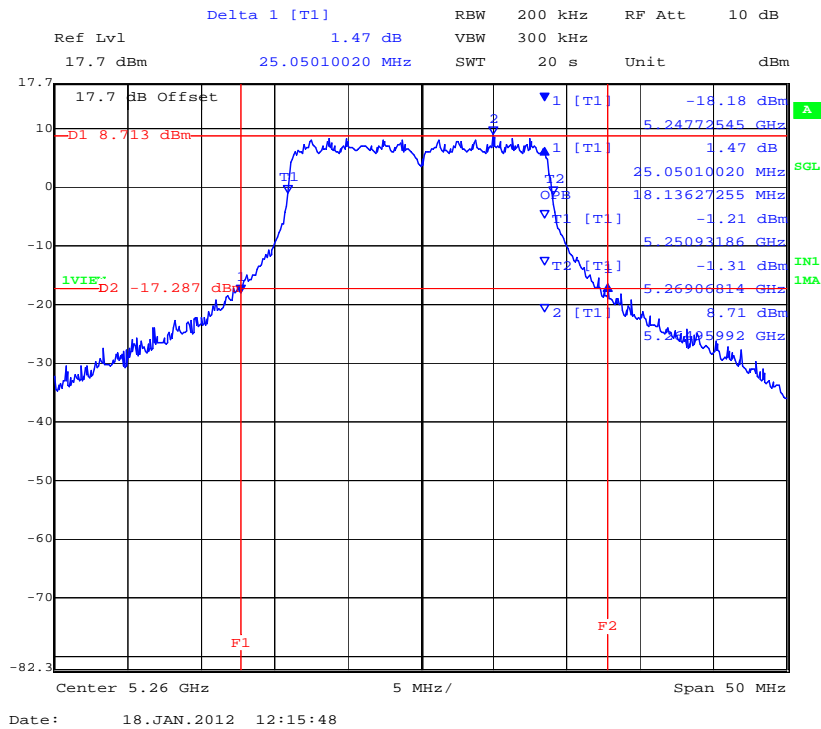


PORT B 5,260 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

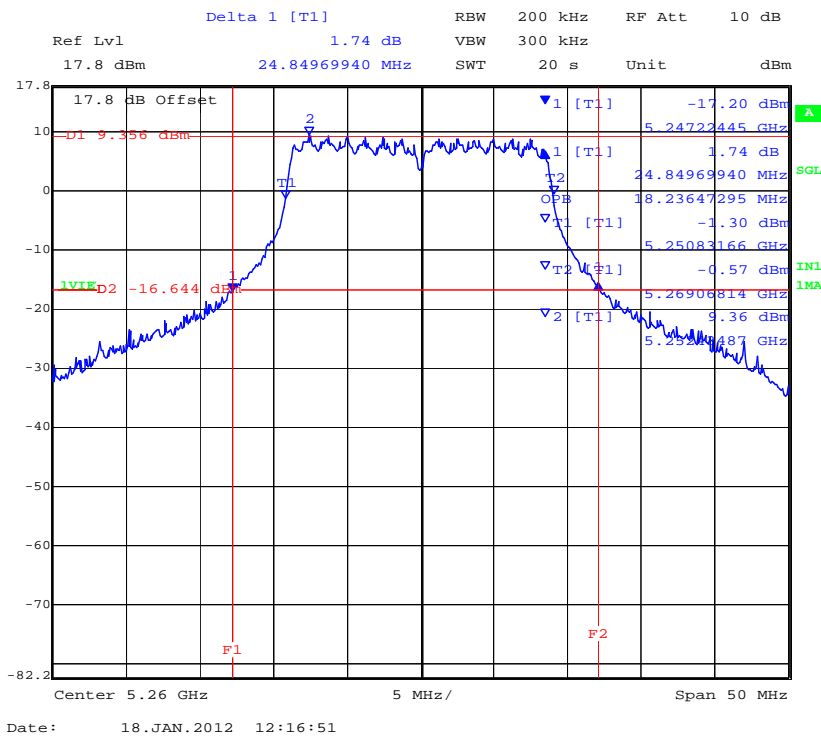


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,300 MHz 802.11n HT-20 26 dB and 99 % Bandwidth

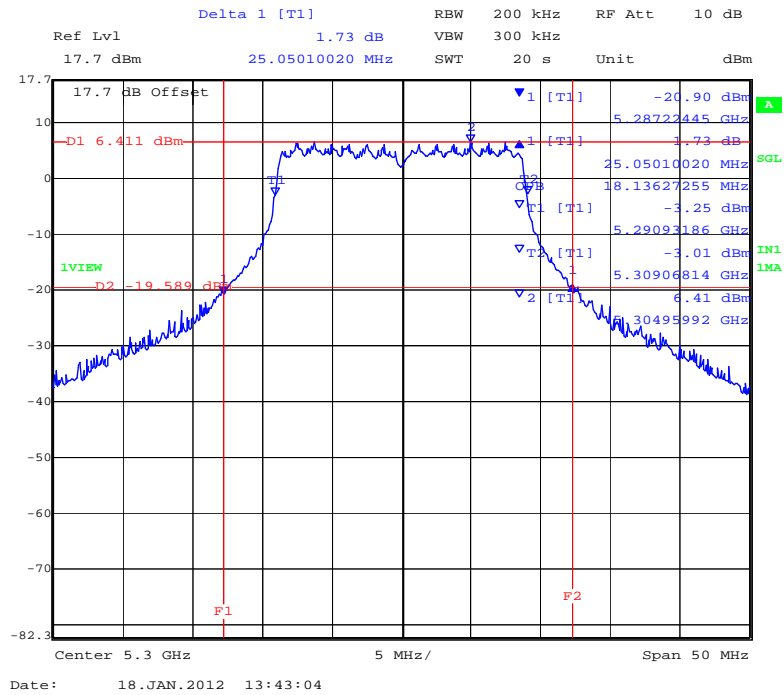


PORT B 5,300 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

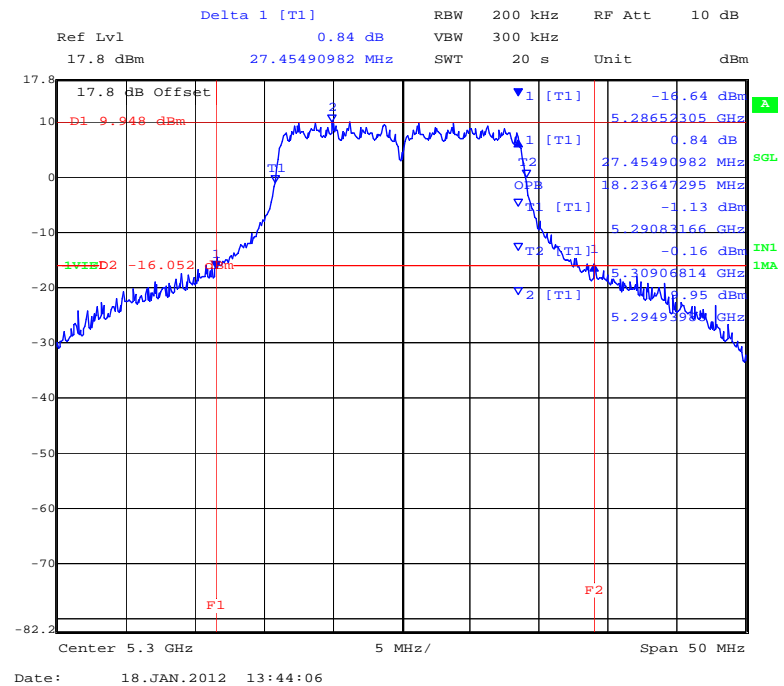


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,320 MHz 802.11n HT-20 26 dB and 99 % Bandwidth

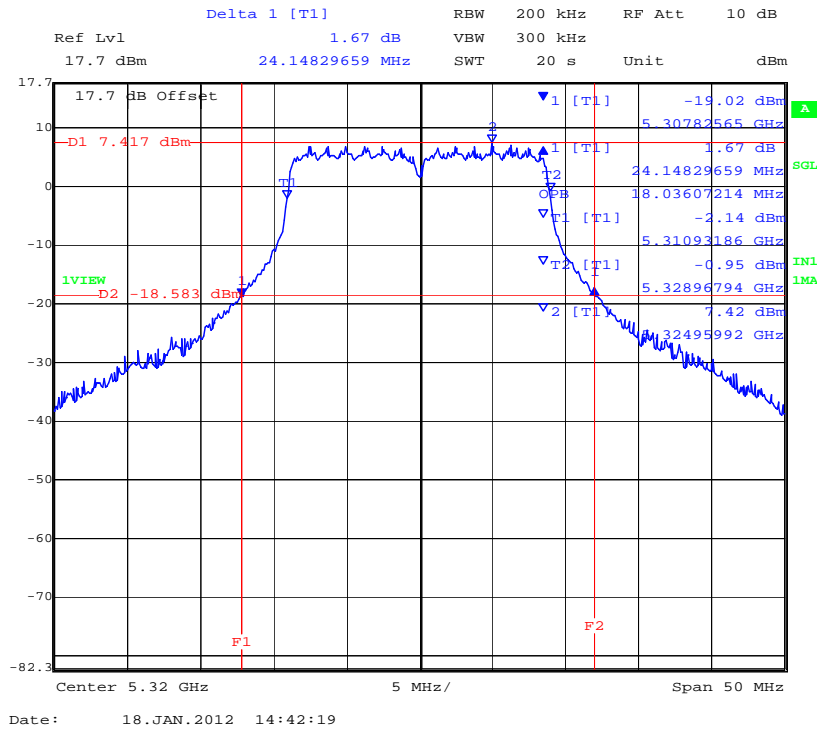

PORT B 5,320 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

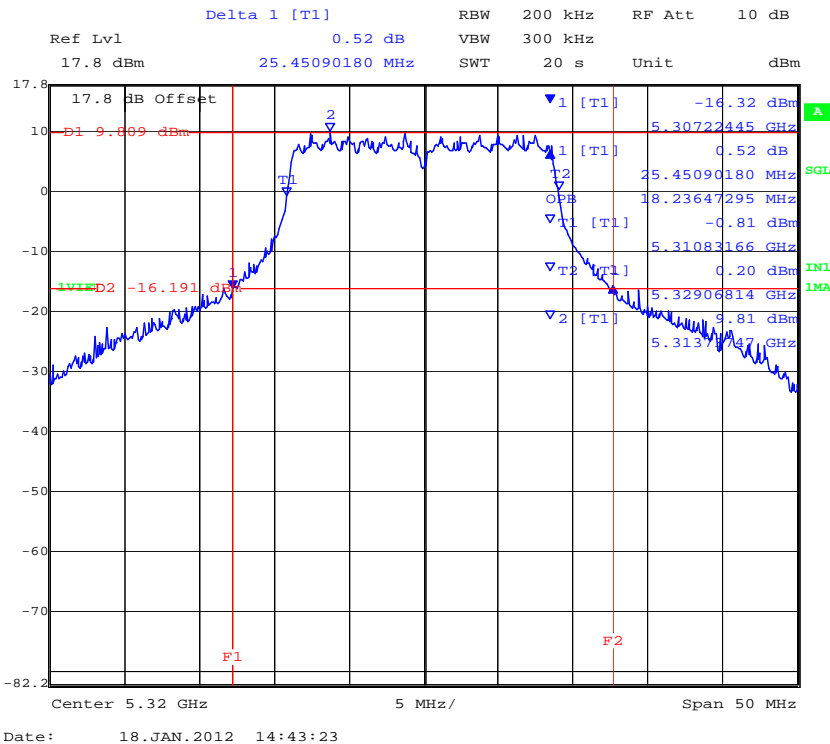

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 29 of 186

TABLE OF RESULTS – 802.11n HT-40 5250 – 5350 MHz

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35 to 42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (x):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	6 dBi
Applied Voltage:	12.0 Vdc		
Notes 1:			
Notes 2:			

26 dB Bandwidth

Test Frequency	26 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz				kHz	MHz	
MHz	a	b	c	d			
5270	45.491000	53.307000	--	--	500	0.5	-44.991000
5310	45.291000	62.525000	--	--			-44.791000

99% Bandwidth


Test Frequency	99 % Bandwidth						
	MHz						
MHz	a	b	c	d			
5270	36.473000	36.473000	--	--			
5310	36.473000	36.673000	--	--			

Measurement uncertainty:	±2.81 dB
---------------------------------	----------


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,270 MHz 802.11n HT-40 26 dB and 99 % Bandwidth

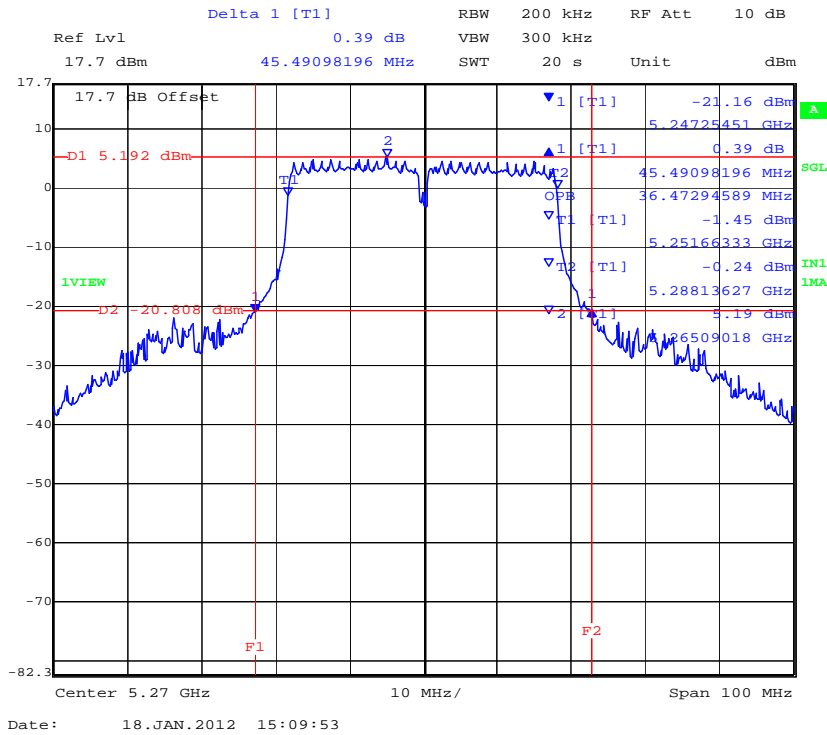


PORT B 5,270 MHz 802.11n HT-40 26 dB and 99 % Bandwidth

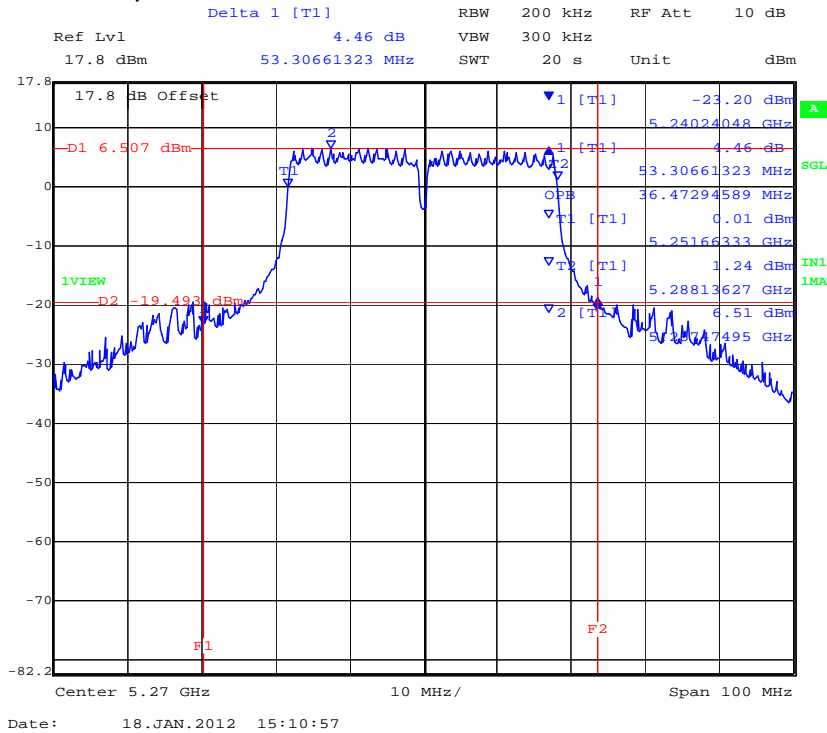


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,310 MHz 802.11n HT-40 26 dB and 99 % Bandwidth

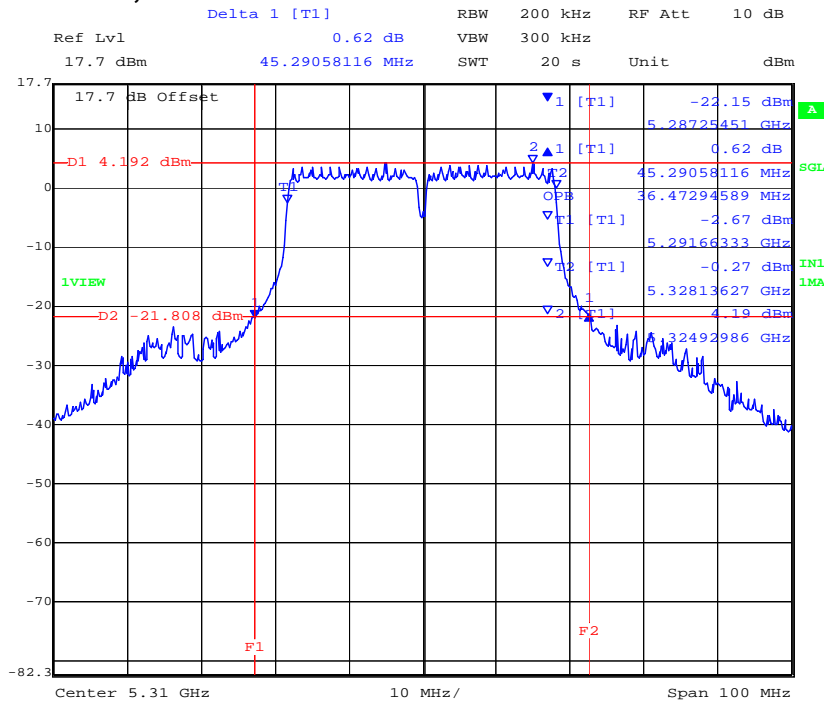

PORT B 5,310 MHz 802.11n HT-40 26 dB and 99 % Bandwidth

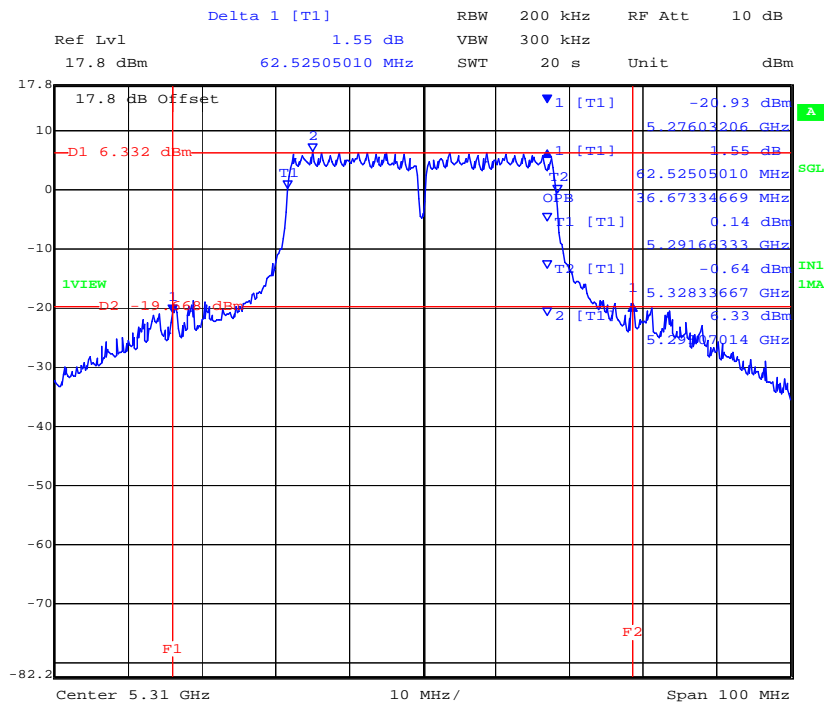

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 32 of 186

TABLE OF RESULTS – 802.11a 5470 – 5725 MHz

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35 to 42
Variant:	802.11a	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (x):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	6 dBi
Applied Voltage:	12.0 Vdc		
Notes 1:			
Notes 2:			

26 dB Bandwidth

Test Frequency	26 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz				kHz	MHz	MHz
MHz	a	b	c	d			
5500	26.954000	25.150000	--	--	500	0.5	-24.650000
5580	26.553000	28.758000	--	--			-26.053000
5700	24.148000	24.048000	--	--			-23.548000

99% Bandwidth


Test Frequency	99 % Bandwidth					
	MHz					
MHz	a	b	c	d		
5500	17.034000	17.134000	--	--		
5580	17.034000	17.234000	--	--		
5700	16.934000	17.034000	--	--		

Measurement uncertainty:	±2.81 dB
---------------------------------	----------


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,500 MHz 802.11a - 26 dB and 99 % Bandwidth

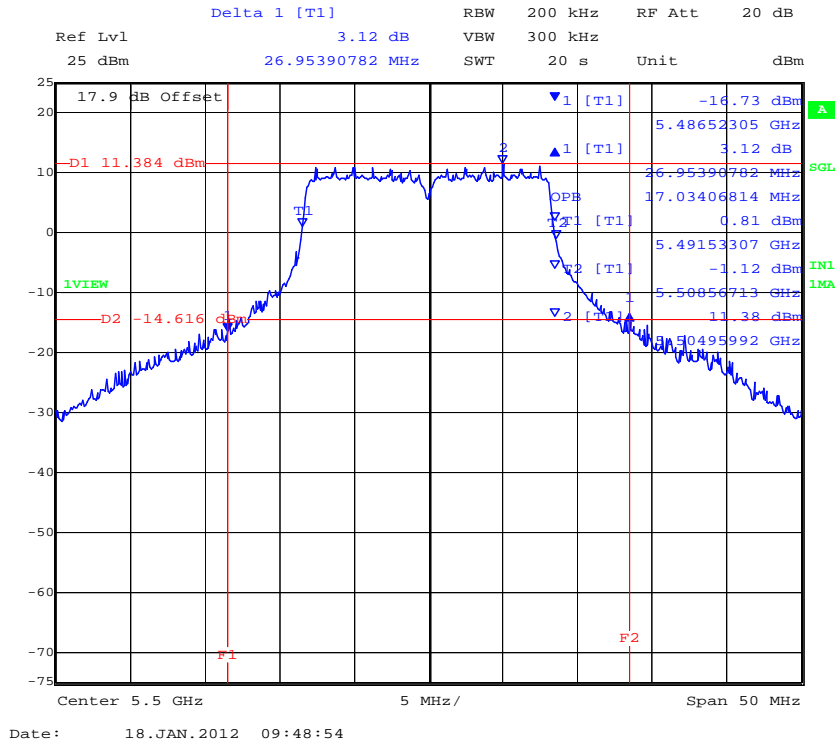


PORT B 5,500 MHz 802.11a - 26 dB and 99 % Bandwidth

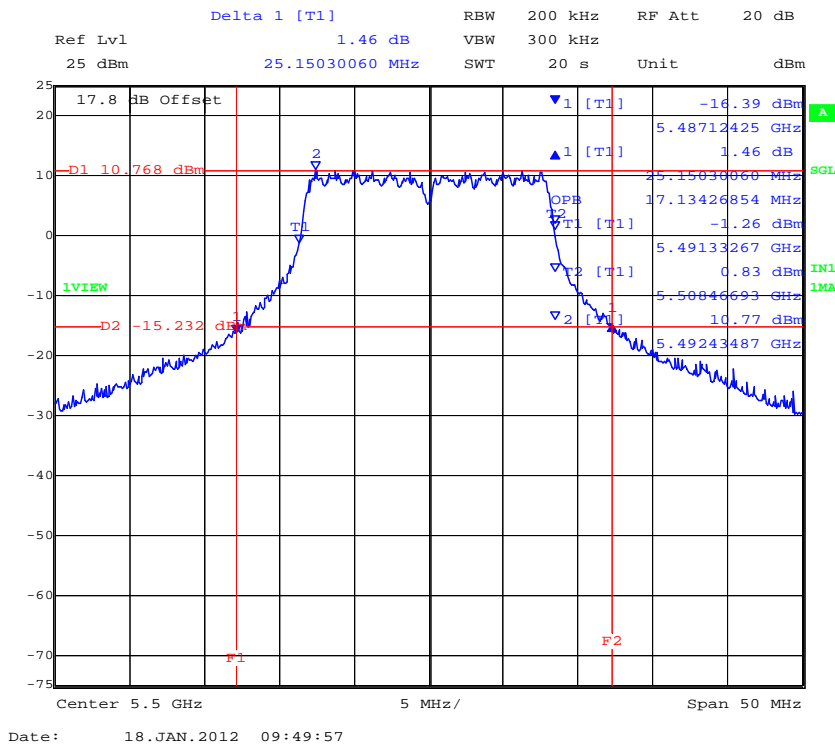


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,580 MHz 802.11a - 26 dB and 99 % Bandwidth

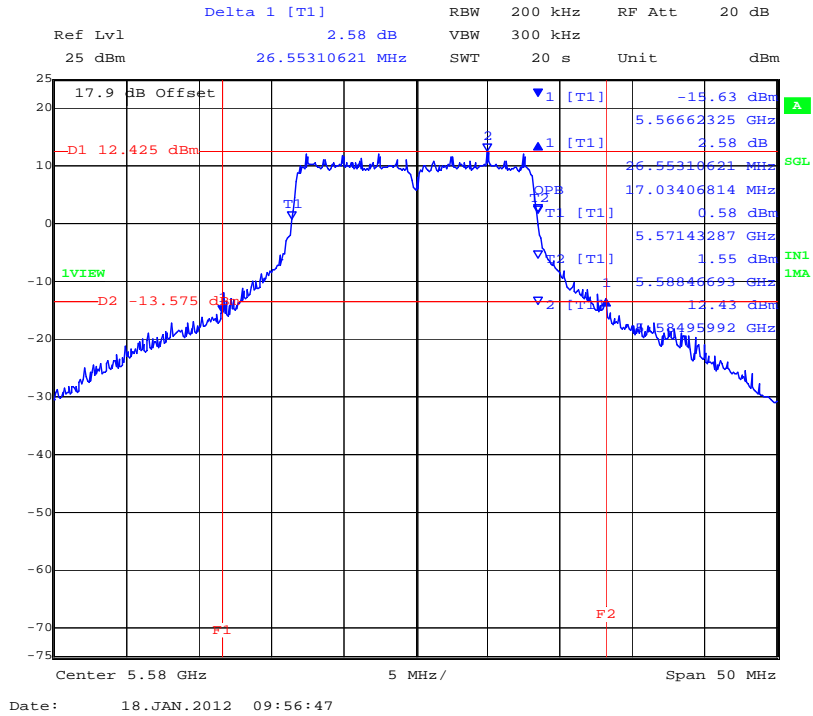


PORT B 5,580 MHz 802.11a - 26 dB and 99 % Bandwidth

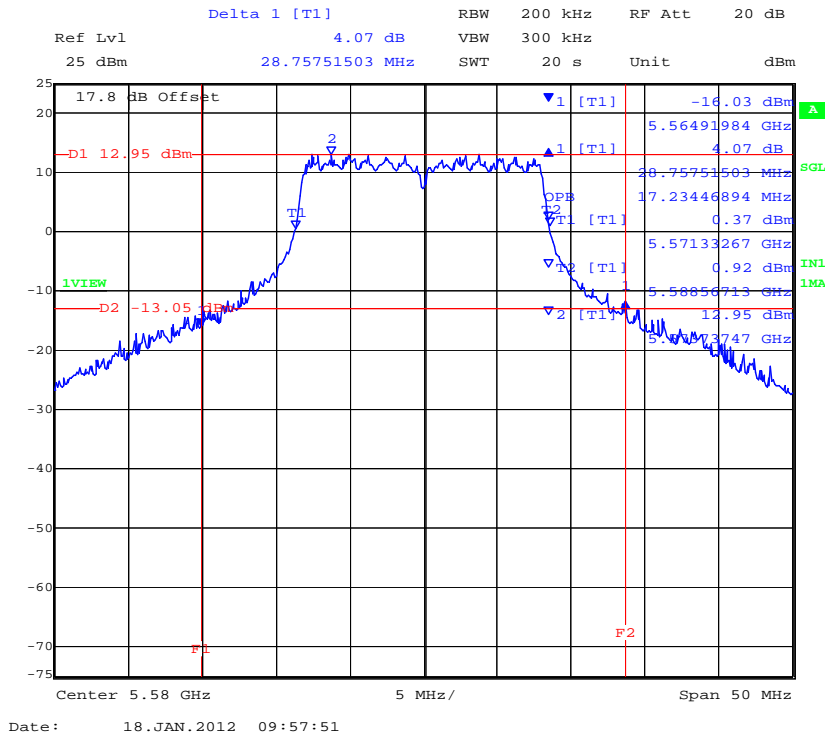


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,700 MHz 802.11a - 26 dB and 99 % Bandwidth

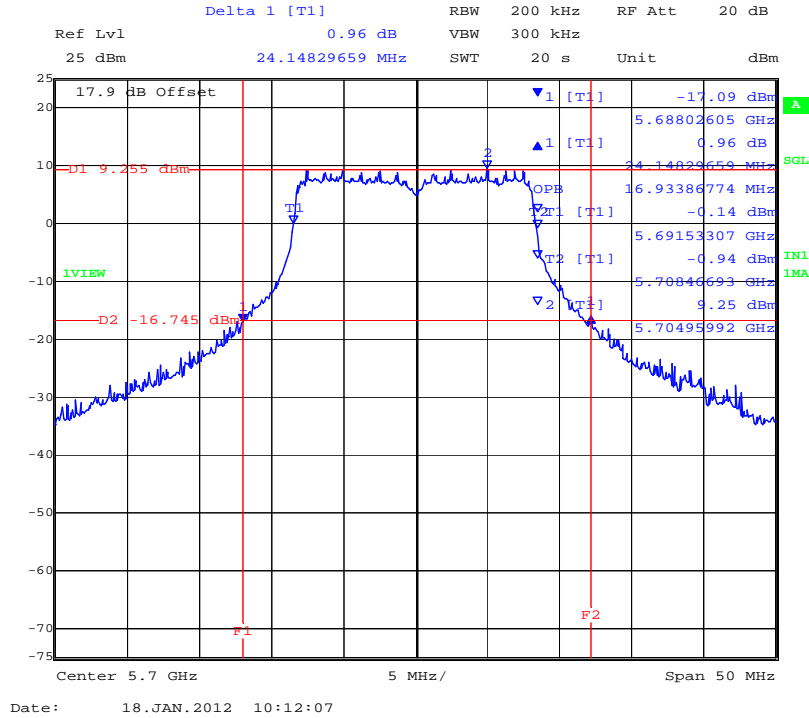

PORT B 5,700 MHz 802.11a - 26 dB and 99 % Bandwidth

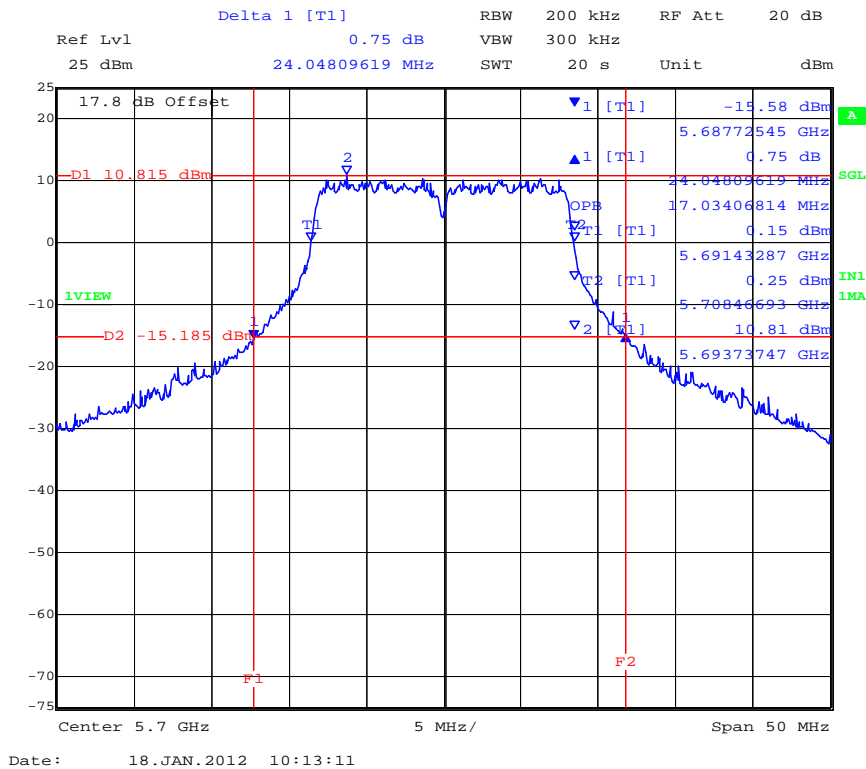

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 36 of 186

TABLE OF RESULTS – 802.11n HT-20 5470 – 5725 MHz

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35 to 42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (x):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	6 dBi
Applied Voltage:	12.0 Vdc		
Notes 1:			
Notes 2:			

26 dB Bandwidth

Test Frequency	26 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz				kHz	MHz	
MHz	a	b	c	d			
5500	25.551000	25.251000	--	--	500	0.5	-24.751000
5580	25.451000	28.357000	--	--			-24.951000
5700	24.048000	24.950000	--	--			-23.548000

99% Bandwidth


Test Frequency	99 % Bandwidth					
	MHz					
MHz	a	b	c	d		
5500	18.136000	18.236000	--	--		
5580	18.236000	18.437000	--	--		
5700	18.136000	18.136000	--	--		

Measurement uncertainty:	±2.81 dB
---------------------------------	----------


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,500 MHz 802.11n HT-20 - 26 dB and 99 % Bandwidth

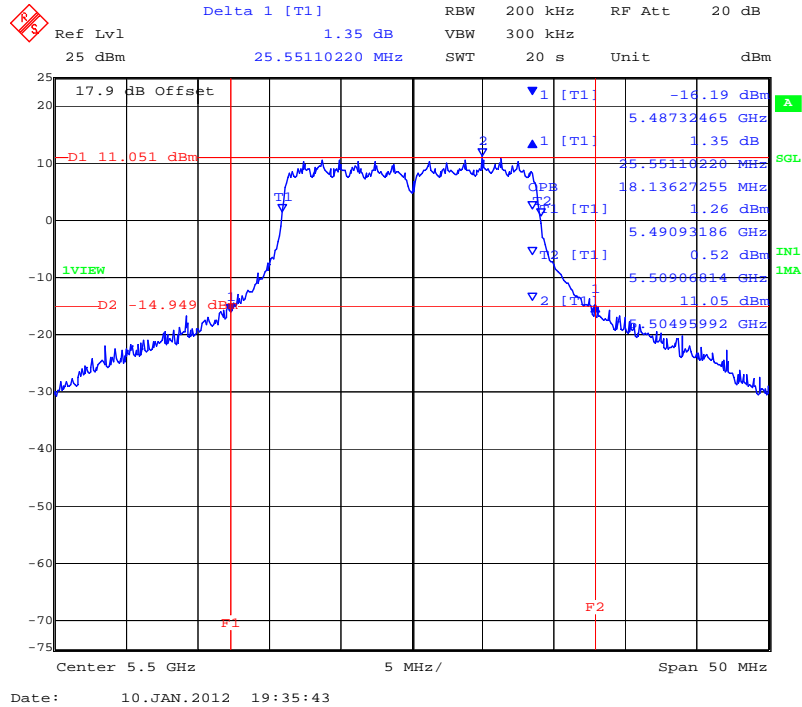


PORT B 5,500 MHz 802.11n HT-20 - 26 dB and 99 % Bandwidth

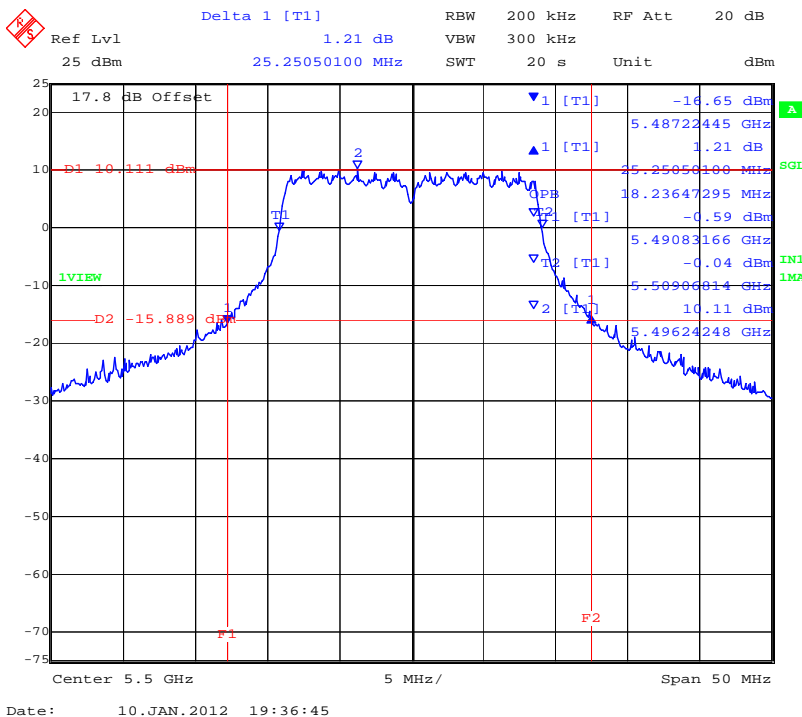


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,580 MHz 802.11n HT-20 - 26 dB and 99 % Bandwidth

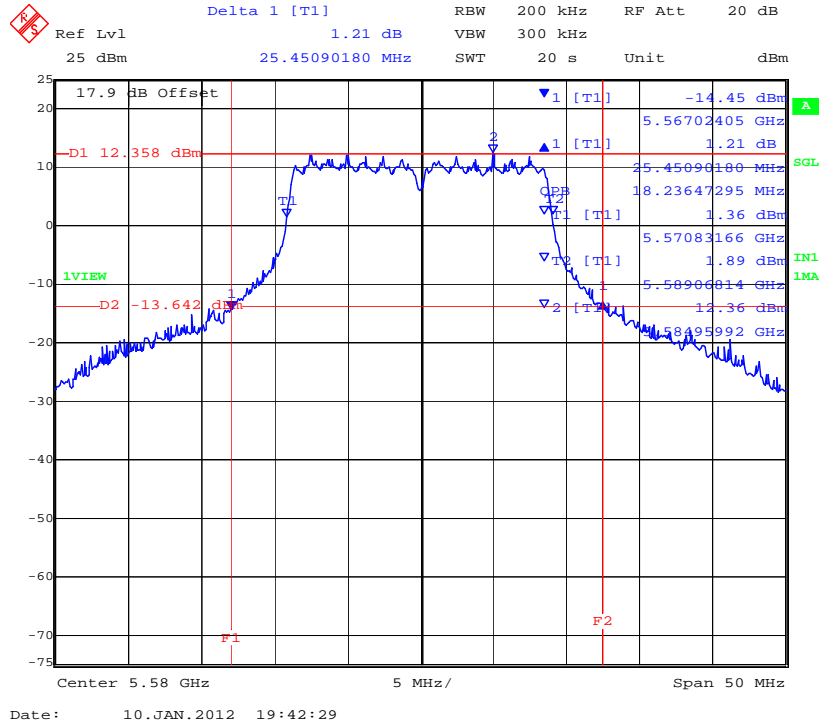


PORT B 5,580 MHz 802.11n HT-20 - 26 dB and 99 % Bandwidth

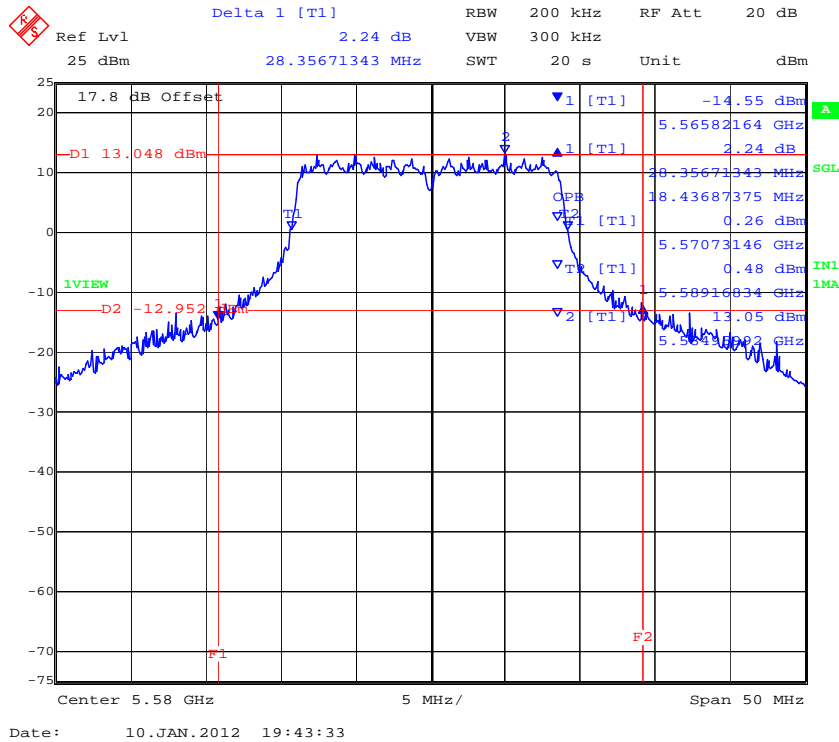

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT A 5,700 MHz 802.11n HT-20 - 26 dB and 99 % Bandwidth

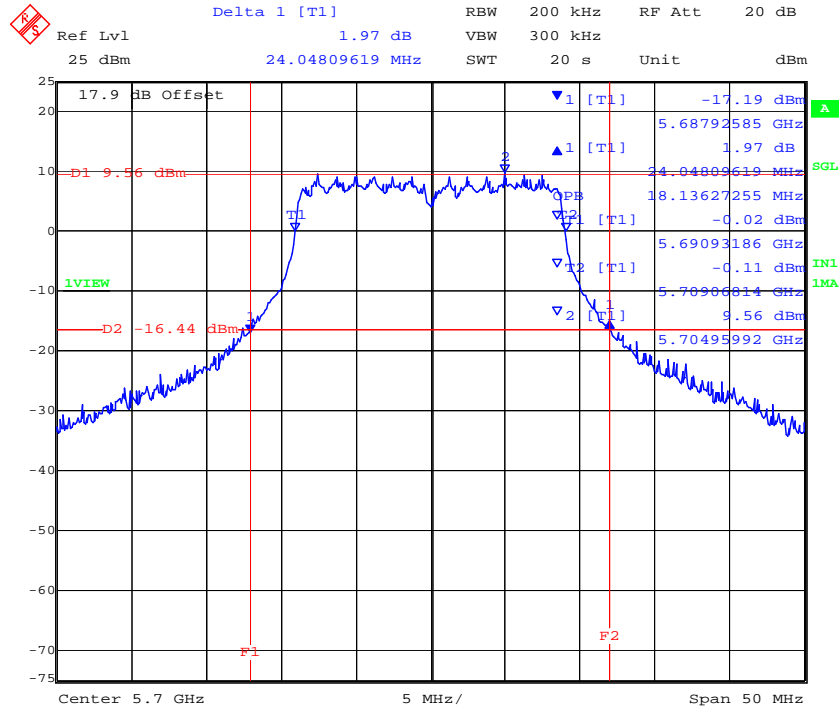

Date: 10.JAN.2012 19:49:28

PORT B 5,700 MHz 802.11n HT-20 - 26 dB and 99 % Bandwidth

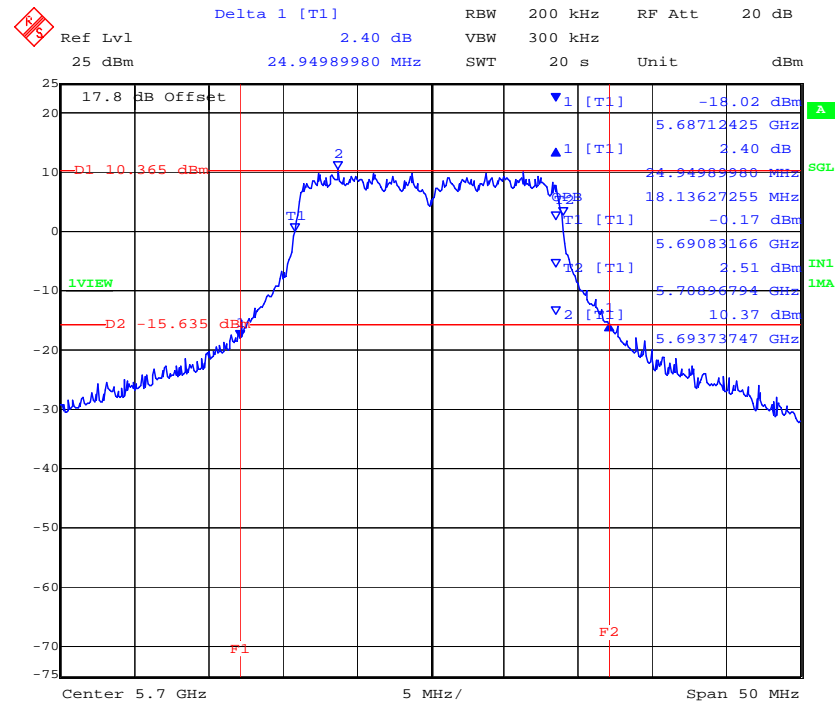

Date: 10.JAN.2012 19:50:31

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 40 of 186

TABLE OF RESULTS – 802.11n HT-40 5470 – 5725 MHz

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35 to 42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (x):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	6 dBi
Applied Voltage:	12.0 Vdc		
Notes 1:			
Notes 2:			

26 dB Bandwidth

Test Frequency	26 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz				kHz	MHz	
MHz	a	b	c	d			
5510	45.090000	46.693000	--	--	500	0.5	-44.590000
5550	45.291000	46.894000	--	--			-44.791000
5670	44.489000	46.293000	--	--			-43.989000

99% Bandwidth


Test Frequency	99 % Bandwidth						
	MHz						
MHz	a	b	c	d			
5510	36.273000	36.473000	--	--			
5550	36.473000	36.673000	--	--			
5670	36.473000	36.473000	--	--			

Measurement uncertainty:	±2.81 dB
---------------------------------	----------


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,510 MHz 802.11n HT-40 - 26 dB and 99 % Bandwidth

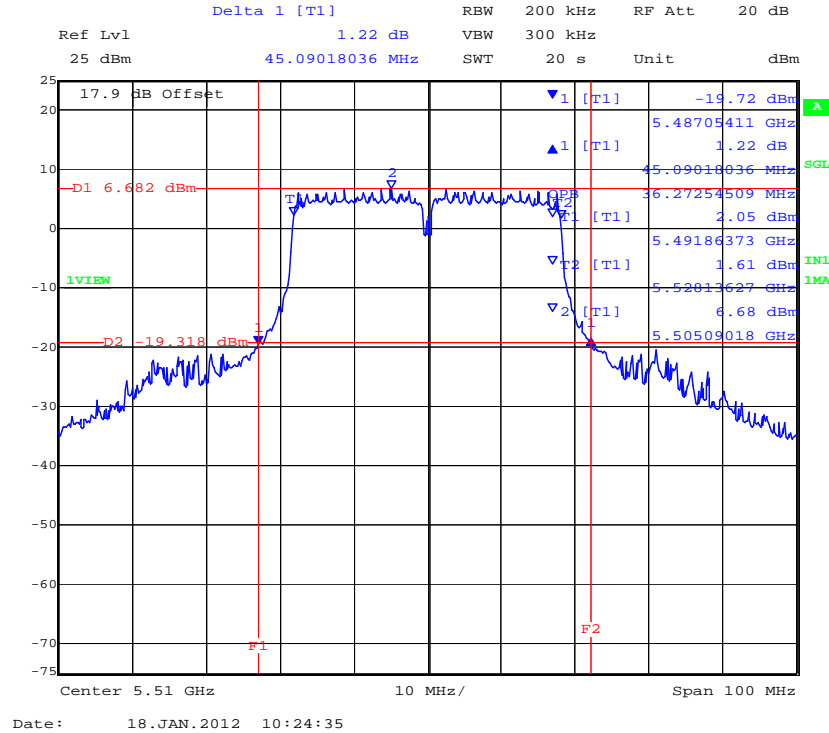


PORT B 5,510 MHz 802.11n HT-40 - 26 dB and 99 % Bandwidth

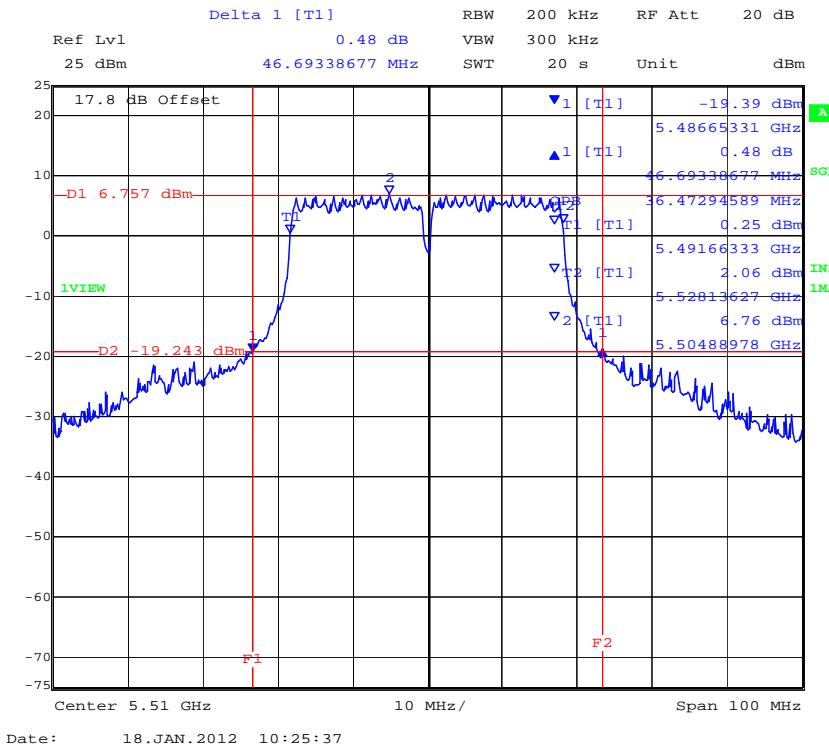


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,550 MHz 802.11n HT-40 - 26 dB and 99 % Bandwidth

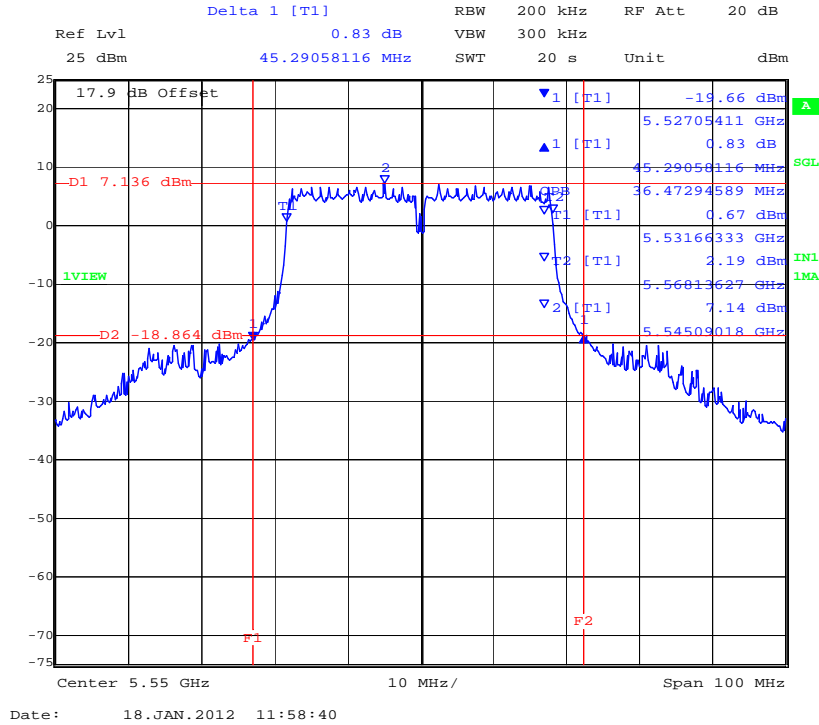


PORT B 5,550 MHz 802.11n HT-40 - 26 dB and 99 % Bandwidth

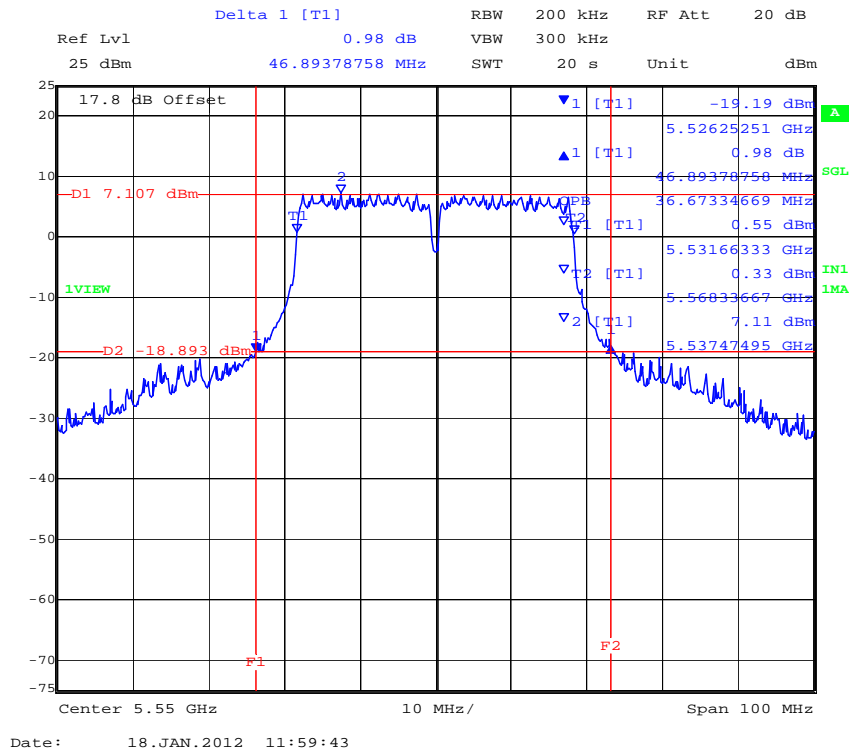

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT A 5,670 MHz 802.11n HT-40 - 26 dB and 99 % Bandwidth

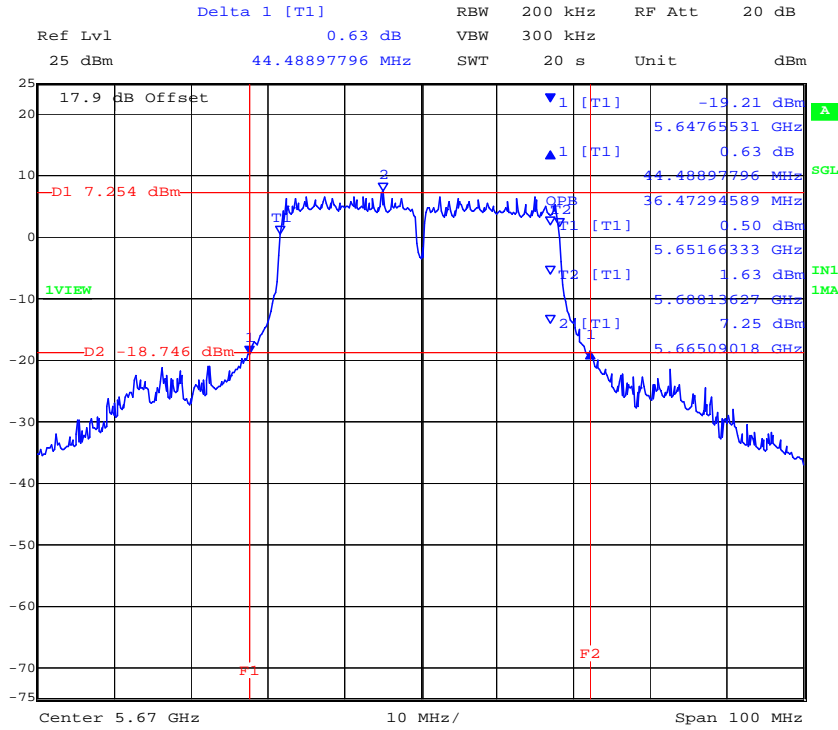

Date: 18.JAN.2012 12:06:47

PORT B 5,670 MHz 802.11n HT-40 - 26 dB and 99 % Bandwidth

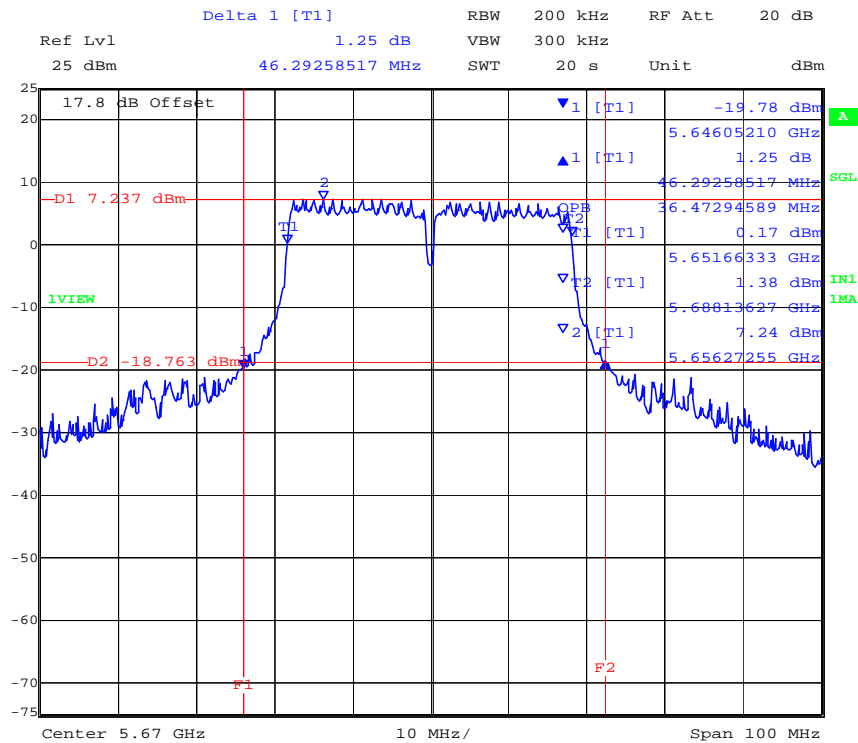

Date: 18.JAN.2012 12:07:51

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 44 of 186

Specification

Limits

FCC, Part 15 §15.407 (a)(1), (a)(2) and Industry Canada RSS-210 § A9.2(2)

(a)(1) For the band 5.15-5.25 GHz the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or +4 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

(a)(2) For the 5.25-5.35 GHz band the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or +11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

Industry Canada RSS-Gen 4.4

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

Laboratory Measurement Uncertainty for Spectrum Measurement

Measurement uncertainty	±2.81 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of RF Spectrum Mask'	0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5.1.2. Transmit Output Power

FCC, Part 15 Subpart C §15.407(a)
Industry Canada RSS-210 §9.9(2)
Industry Canada RSS-Gen 4.6

Test Procedure

The transmitter terminal of EUT was connected to the input of an average power meter. Measurements were made while EUT was operating in a continuous transmission mode i.e. 100 % duty cycle at the appropriate center frequency. All cable losses and offsets were taken into consideration in the measured result.

Test Measurement Set up

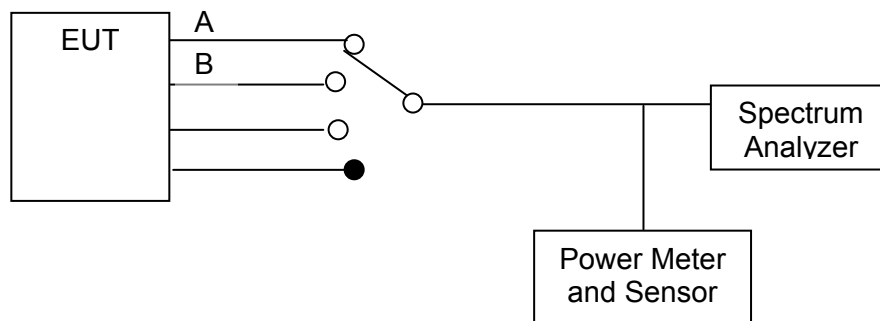

Measurement set up for Transmitter Output Power



FCC Limits

Bands 5250 – 5350 and 5470 – 5725 MHz

Limit lesser of: 250 mW or 11 dBm + 10 log (B) dBm.

Mode	Frequency Range (MHz)	Maximum 26 dB Bandwidth (MHz)	11 + 10 Log (B) (dBm)	Limit (dBm)
a	5250 – 5350	28.8	+25.59	+24.00
HT-20		28.4	+25.53	+24.00
HT-40	5470 – 5725	62.5	+28.96	+24.00

Industry Canada Limits

Bands 5250 – 5350 and 5470 – 5725 MHz

Limit lesser of: 250 mW or 11 dBm + 10 log (B) dBm.

Mode	Frequency Range (MHz)	99% Bandwidth (MHz)	11 + 10 Log (B) (dBm)	Limit (dBm)
a	5250 – 5350	17.234	+23.36	+23.36
HT-20		18.437	+23.65	+23.65
HT-40	5470 – 5725	36.673	+26.64	+24.00



Antenna Beam and Non-Beam Forming Power Levels

15. 407 (a)(1), (a) (2) Operation with directional antenna gains greater than 6 dBi.

If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. Further FCC KDB 662911 D01 Multiple Transmitter Output v01 requires that the gain of antennas transmitting the same data (legacy 802.11a mode) must be increased by $10 * \log(N)$ when N is the number of antenna elements.

MIMO Operation 5250-5350 and 5470 – 5725 MHz

Antenna (dB)	Gain (dBi)	Max. Allowable Conducted Peak Power (dBm)		Maximum EIRP (dBm)
		Non-Beam Forming	Beam Forming	
AP-ANT-18	7.5	+22.5	N/A	+30.0
AP-ANT-19	6.0	+24.0		+30.0
AP-ANT-1B	5.8	+24.0		+30.0
AP-ANT-1F	4.5	+24.0		+30.0
AP-ANT-10	6.0	+24.0		+30.0
AP-ANT-13B	3.3	+24.0		+30.0
AP-ANT-14	3.6	+24.0		+30.0
AP-ANT-16	4.7	+24.0		+30.0
AP-ANT-17	5.0	+24.0		+30.0

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 48 of 186

Non-MIMO Operation (Legacy) 5250-5350 and 5470 – 5725 MHz

Antenna (dB)	Gain dBi	Increased Gain V's No. Antenna Ports		Total Gain dBi	Max. Allowable Conducted Peak Power (dBm)	Maximum EIRP (dBm)
		Ports	dB			
AP-ANT-18	7.5	2	3.01	10.51	+19.49	+30.0
AP-ANT-19	6.0	2	3.01	9.01	+20.99	+30.0
AP-ANT-1B	5.8	2	3.01	8.81	+21.19	+30.0
AP-ANT-1F	4.5	2	3.01	7.51	+22.49	+30.0
AP-ANT-10	6.0	2	3.01	9.01	+20.99	+30.0
AP-ANT-13B	3.3	2	3.01	6.31	+23.69	+30.0
AP-ANT-14	3.6	2	3.01	6.61	+23.39	+30.0
AP-ANT-16	4.7	2	3.01	7.71	+22.29	+30.0
AP-ANT-17	5.0	2	3.01	8.01	+21.99	+30.0

Measurement Results for Transmit Output Power

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

EUT parameters.

Power Level: Maximum

Duty Cycle: 100%

Temperature: Ambient

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Measurement Results for Transmit Output Power

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

EUT parameters.

Power Level: Maximum

Duty Cycle: 100%

TABLE OF RESULTS –

5.25 – 5.35 GHz Band

802.11a

Test Conditions:	15.407 (a)(1)	Rel. Humidity (%):	35	to	42
Variant:	802.11a	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (x):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	6 dBi		
Applied Voltage:	12.0 Vdc				
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)				Combined	Calculated		
MHz	a	b	c	d				
5260	17.26	17.80	--	--	N/A	20.55	30.00	-9.45
5300	15.78	18.26	--	--	N/A	20.20	30.00	-9.80
5320	16.00	17.73	--	--	N/A	19.96	30.00	-10.04

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 50 of 186

802.11n HT-20

Test Conditions:	15.407 (a)(1)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (x):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	6 dBi		
Applied Voltage:	12.0 Vdc				
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)				Combined	Calculated		
MHz	a	b	c	d				
5260	17.34	17.82	--	--	N/A	20.60	30.00	-9.40
5300	15.69	18.43	--	--	N/A	20.28	30.00	-9.72
5320	16.01	17.90	--	--	N/A	20.07	30.00	-9.93

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 51 of 186

802.11n HT-40

Test Conditions:	15.407 (a)(1)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (x):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	6 dBi		
Applied Voltage:	12.0 Vdc				
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)				Combined	Calculated		
MHz	a	b	c	d			dBm	dB
5270	16.86	18.06	--	--	N/A	20.51	30.00	-9.49
5310	15.85	18.11	--	--	N/A	20.14	30.00	-9.86

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 52 of 186

5.470 – 5.725 GHz Band

802.11a

Test Conditions:	15.407 (a)(1)	Rel. Humidity (%):	35	to	42
Variant:	802.11a	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (x):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	6 dBi		
Applied Voltage:	12.0 Vdc				
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)				Combined	Calculated		
MHz	a	b	c	d				
5500	19.14	18.92	--	--	N/A	22.04	30.00	-7.96
5580	19.87	21.20	--	--	N/A	23.60	30.00	-6.40
5700	17.62	18.83	--	--	N/A	21.28	30.00	-8.72

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 53 of 186

802.11n HT-20

Test Conditions:	15.407 (a)(1)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (x):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	6 dBi		
Applied Voltage:	12.0 Vdc				
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)				Combined	Calculated		
MHz	a	b	c	d				
5500	18.84	18.48	--	--	N/A	21.67	30.00	-8.33
5580	20.29	21.22	--	--	N/A	23.79	30.00	-6.21
5700	17.81	18.76	--	--	N/A	21.32	30.00	-8.68

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 54 of 186

802.11n HT-40

Test Conditions:	15.407 (a)(1)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (x):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	6 dBi		
Applied Voltage:	12.0 Vdc				
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)				Combined	Calculated		
MHz	a	b	c	d				
5510	17.68	18.20	--	--	N/A	20.96	30.00	-9.04
5550	18.07	18.61	--	--	N/A	21.36	30.00	-8.64
5670	17.76	18.42	--	--	N/A	21.11	30.00	-8.89

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Specification

Limits

FCC, Part 15 §15.407 (a)(1), (a)(2) and Industry Canada RSS-210 § A9.2(2)

(a)(1) For the band 5.15-5.25 GHz the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or +4 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

(a)(2) For the 5.25-5.35 and 5470-5725 MHz GHz band the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or +11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

Industry Canada RSS-210 §A9.2(2)

For the band 5150-5250 MHz, the maximum equivalent isotropically radiated power (e.i.r.p.) shall not exceed 200 mW or 10 + 10 log₁₀ B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

For the band 5250-5350 MHz and 5470-5725 MHz, the maximum conducted output power shall not exceed 250 mW or 11 + 10 log₁₀ B, dBm, whichever power is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band. The maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log₁₀ B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

Industry Canada RSS-Gen 4.4

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

Laboratory Measurement Uncertainty for Power Measurements

Measurement uncertainty	±1.33 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-01 'Measuring RF Output Power'	0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5.1.3. Peak Power Spectral Density

FCC, Part 15 Subpart C §15.407(a)
Industry Canada RSS-210 § A9.2(2)

Test Procedure

The transmitter output was connected to a spectrum analyzer and the peak power spectral density measured. Method 2 Sample Detection and power averaging, specified in FCC document DA 02-2138 (Normative Reference (ix) Section 2.1 “Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices”) was used to determine the peak power spectral density of the emission. The Peak Power Spectral Density is the highest level found across the emission in a 1 MHz resolution bandwidth.

Test Measurement Set up

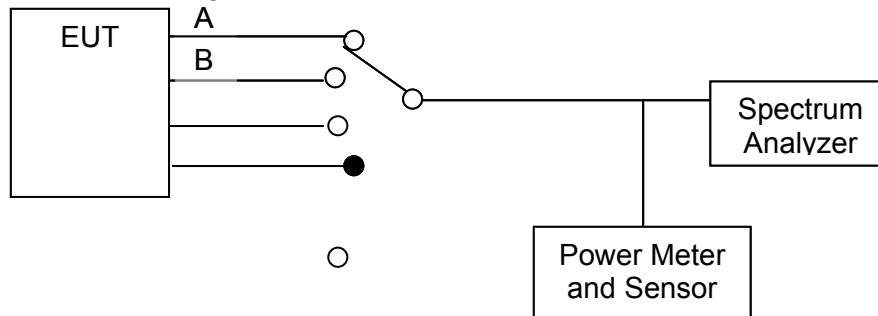

Measurement set up for Peak Power Spectral Density

Measurement Results for Peak Power Spectral Density

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

Radio Parameters

Duty Cycle: 100%

Output: Modulated Carrier

Power: Maximum Default Power



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 57 of 186

TABLE OF RESULTS – 802.11a, 5250 – 5350 MHz

Test Conditions:	15.407 (a)	Rel. Humidity (%):	35	to	42
Variant:	802.11a	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	6 dBi		
Applied Voltage:	12.0 Vdc	Antenna Ports (N):	2		
Notes 1:					
Notes 2:					


Test Frequency	Measured Peak Power				Correction factor	Peak Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
5260	5.35	5.24	--	--	3.01	8.36	11.00	-2.64
5300	2.97	5.03	--	--	3.01	8.04	11.00	-2.96
5320	3.04	5.06	--	--	3.01	8.07	11.00	-2.93

Measurement uncertainty:	±1.33 dB
---------------------------------	----------


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,260 MHz 802.11a Legacy Power Spectral Density

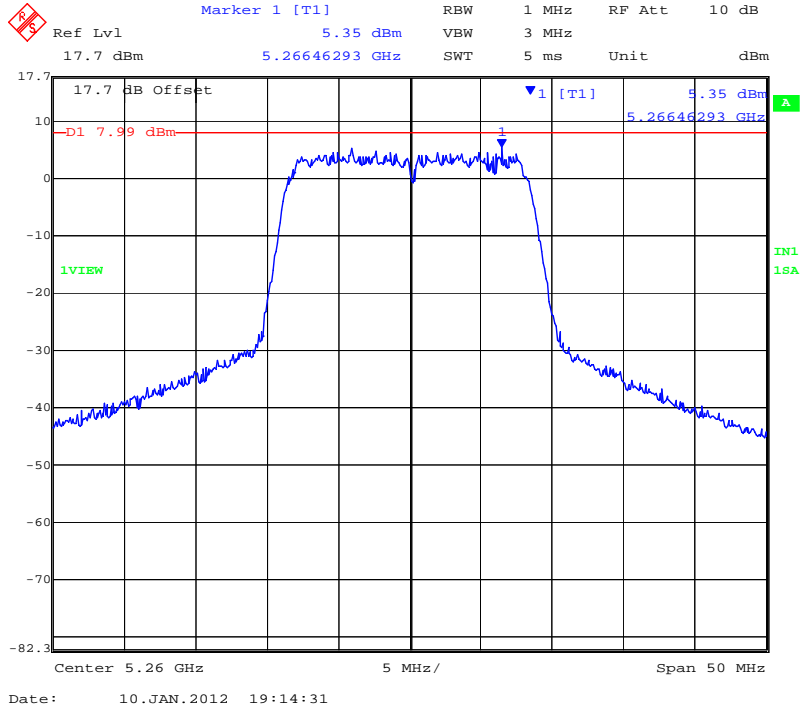


PORT B 5,260 MHz 802.11a Legacy Power Spectral Density

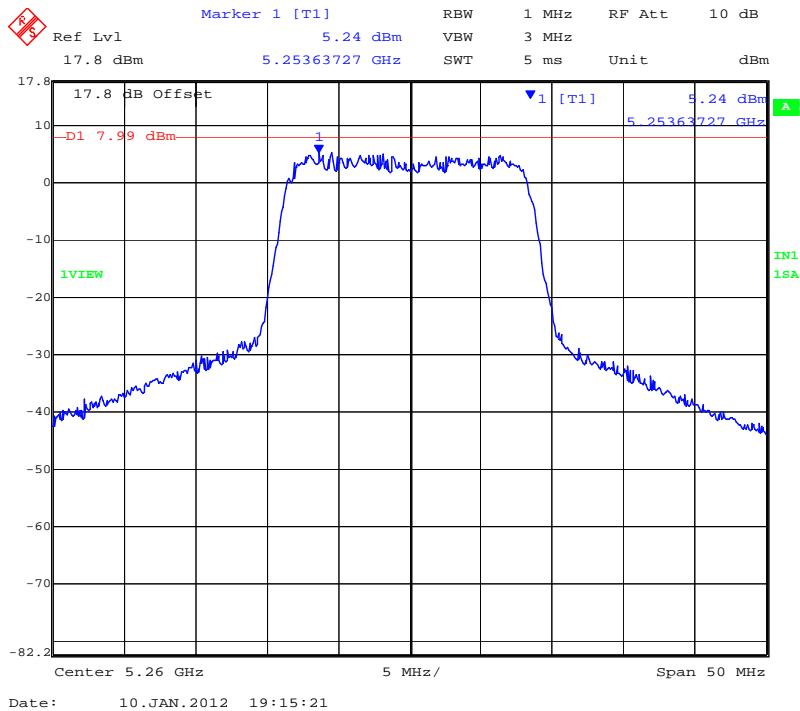

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT A 5,300 MHz 802.11a Legacy Power Spectral Density

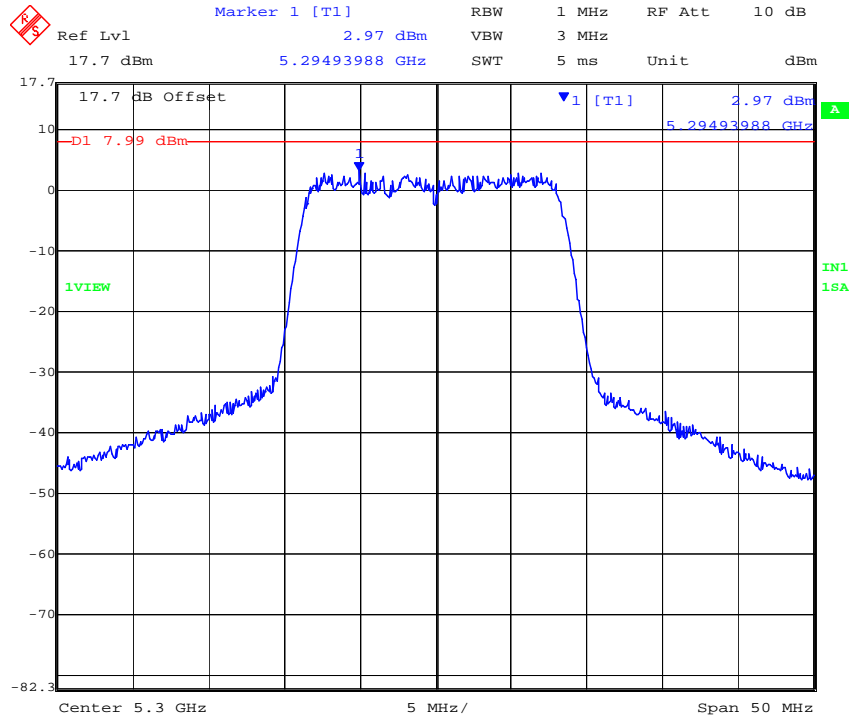

Date: 10.JAN.2012 19:21:33

PORT B 5,300 MHz 802.11a Legacy Power Spectral Density

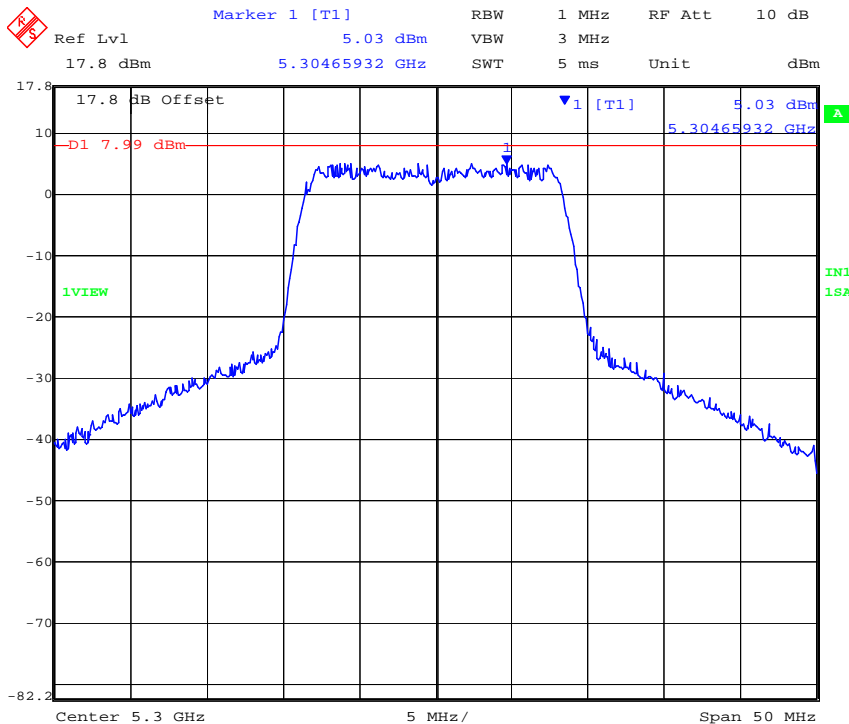


Date: 10.JAN.2012 19:22:22

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT A 5,320 MHz 802.11a Legacy Power Spectral Density

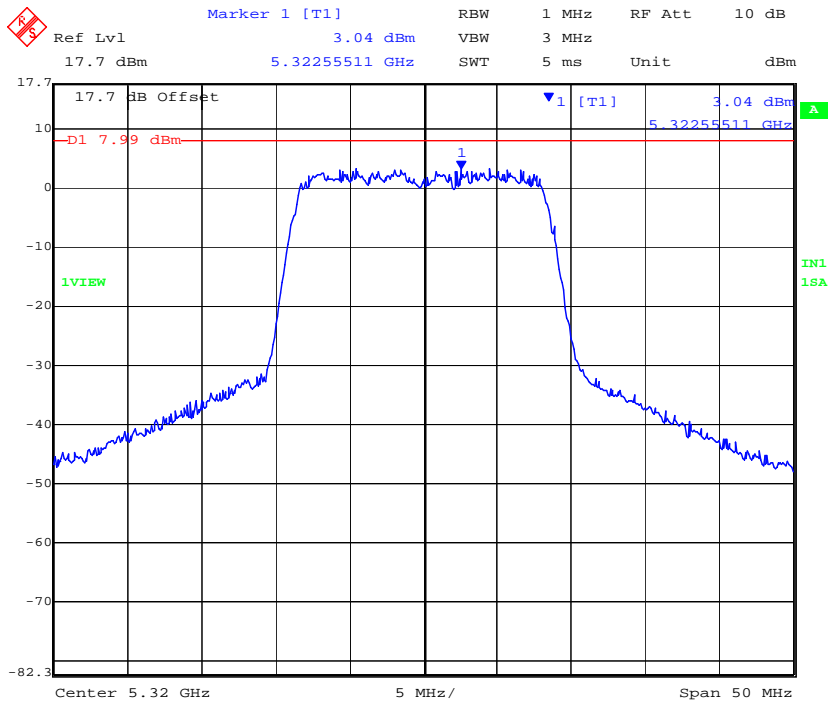

Date: 10.JAN.2012 19:28:22

PORT B 5,320 MHz 802.11a Legacy Power Spectral Density

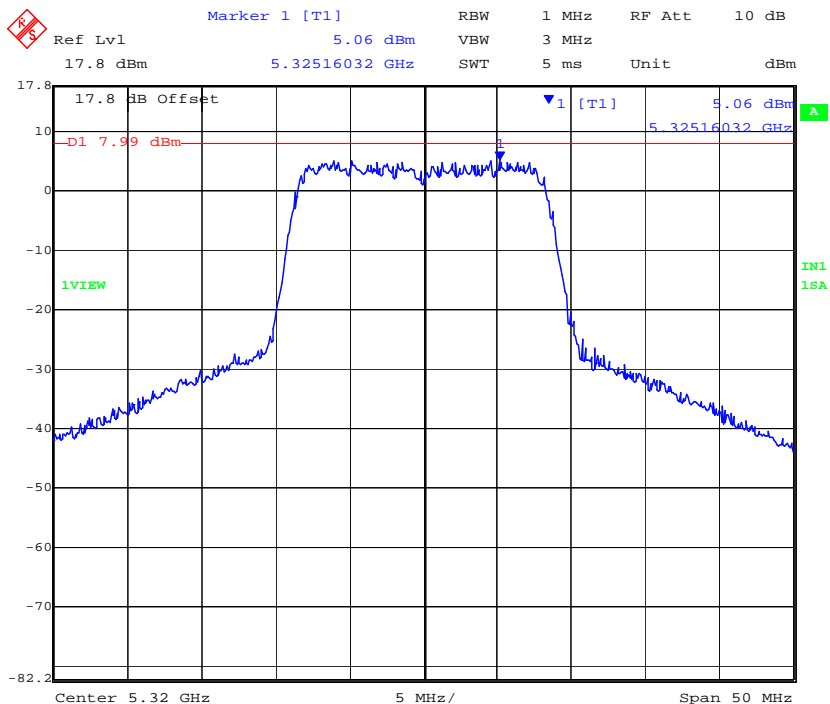

Date: 10.JAN.2012 19:29:11

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 61 of 186

TABLE OF RESULTS – 802.11n HT-20, 5250 – 5350 MHz

Test Conditions:	15.407 (a)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	6 dBi		
Applied Voltage:	12.0 Vdc	Antenna Ports (N):	2		
Notes 1:					
Notes 2:					


Test Frequency	Measured Peak Power				Correction factor	Peak Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
5260	4.73	4.88	--	--	3.01	7.89	11.00	-3.11
5300	2.54	5.90	--	--	3.01	8.91	11.00	-2.09
5320	3.01	5.27	--	--	3.01	8.28	11.00	-2.72

Measurement uncertainty:	±1.33 dB
---------------------------------	----------


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,260 MHz 802.11n HT-20 Power Spectral Density

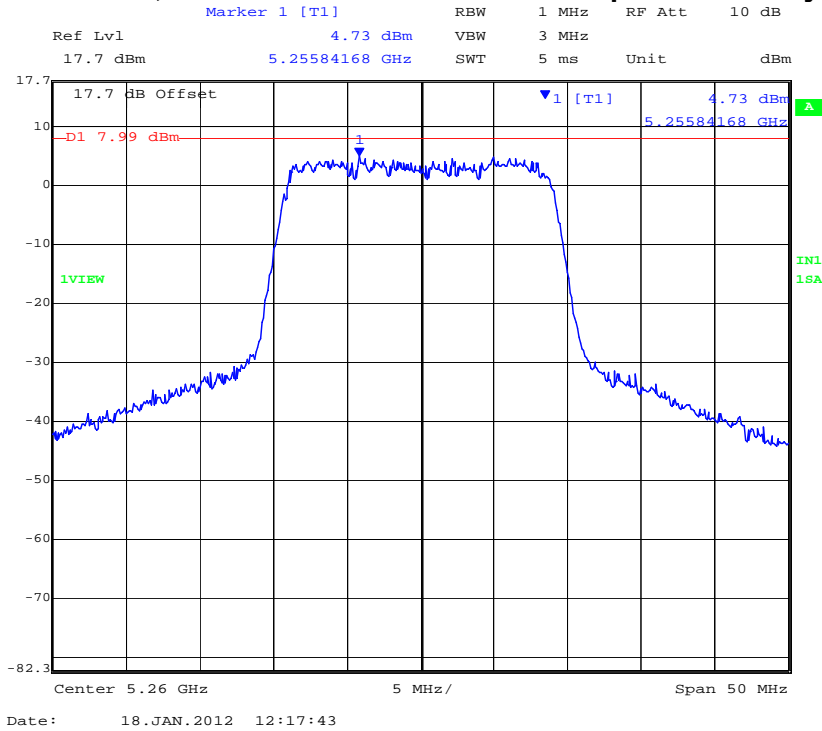


PORT B 5,260 MHz 802.11n HT-20 Power Spectral Density

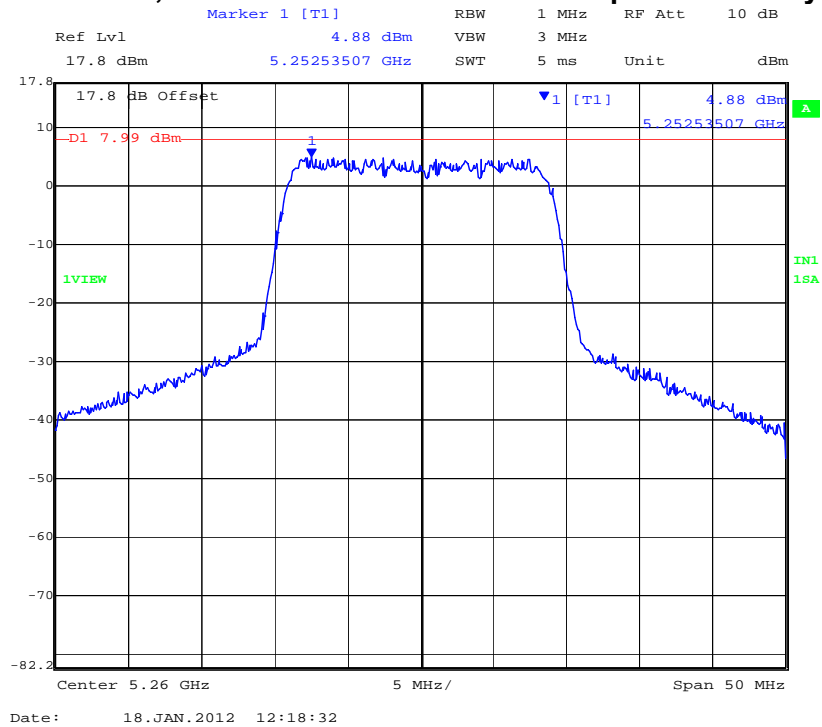


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,300 MHz 802.11n HT-20 Power Spectral Density

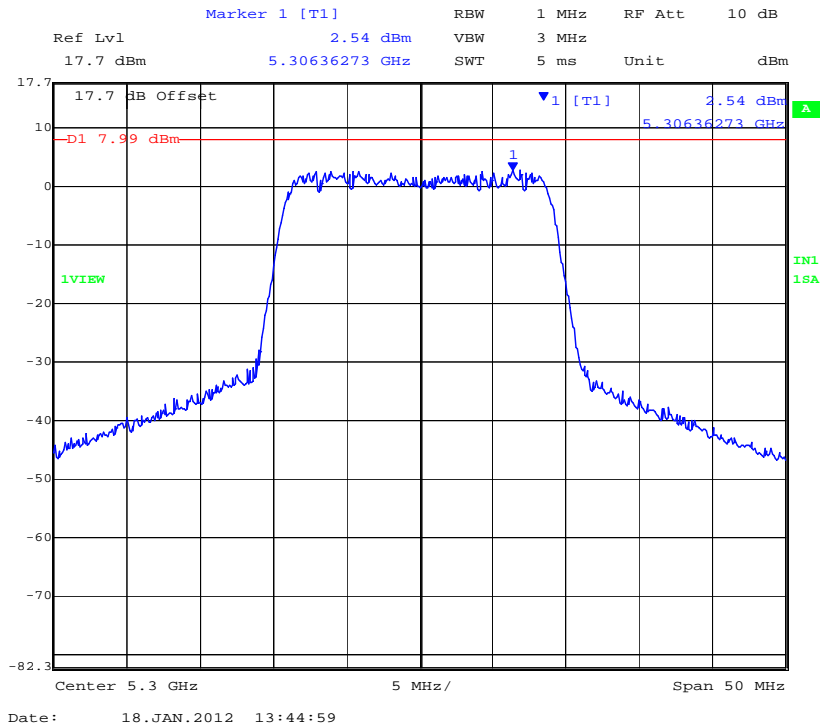


PORT B 5,300 MHz 802.11n HT-20 Power Spectral Density

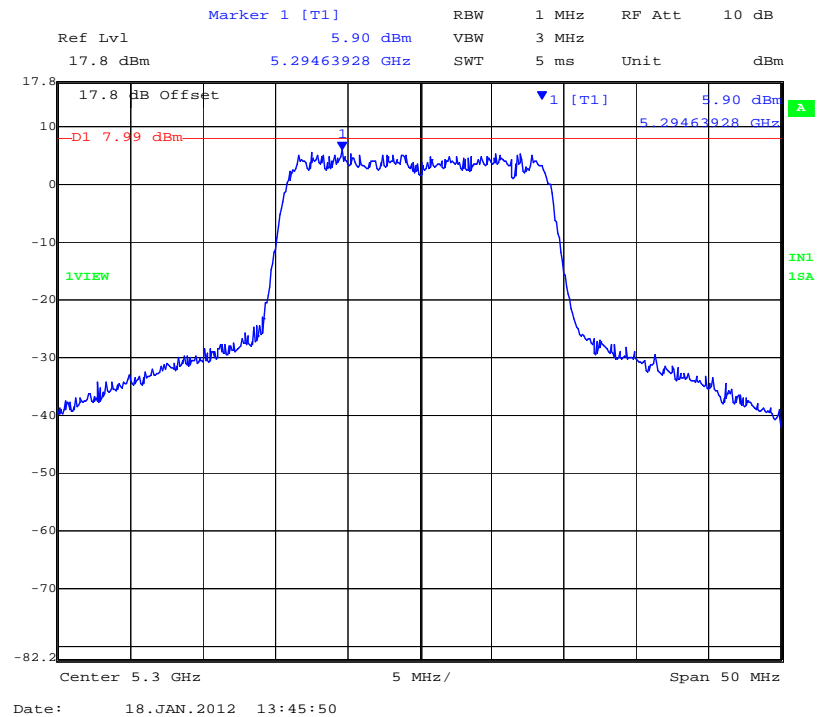

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT A 5,320 MHz 802.11n HT-20 Power Spectral Density

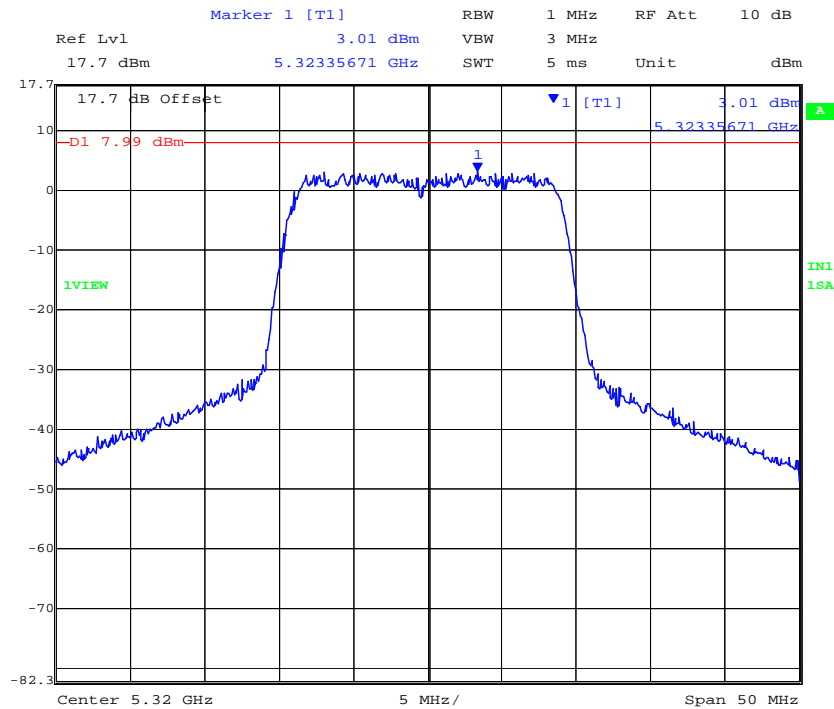

Date: 18.JAN.2012 14:44:16

PORT B 5,320 MHz 802.11n HT-20 Power Spectral Density

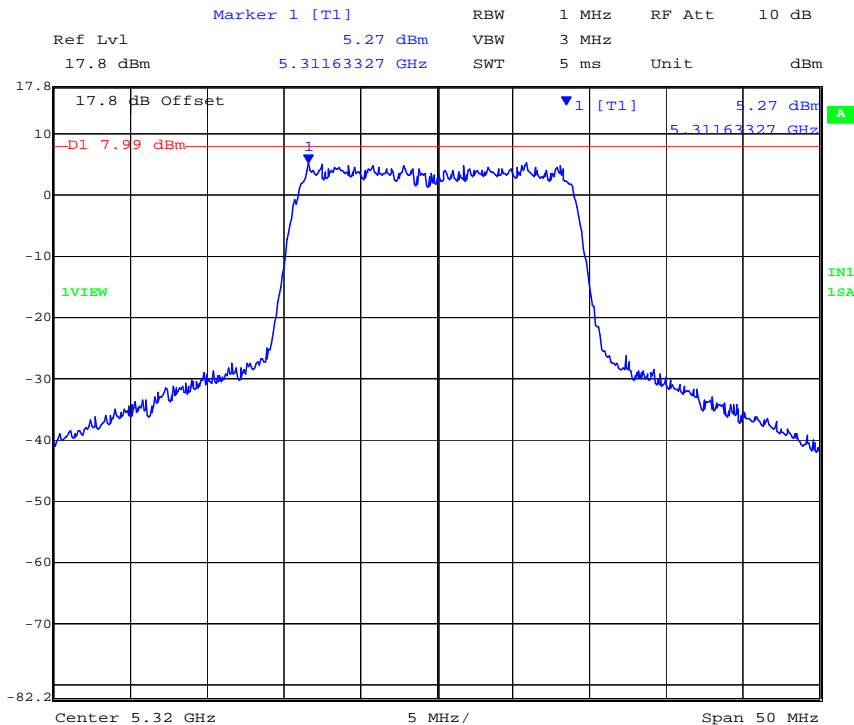

Date: 18.JAN.2012 14:45:05

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 65 of 186

TABLE OF RESULTS – 802.11n HT-40 5250 – 5350 MHz

Test Conditions:	15.407 (a)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	6 dBi		
Applied Voltage:	12.0 Vdc	Antenna Ports (N):	2		
Notes 1:					
Notes 2:					


Test Frequency	Measured Peak Power				Correction factor	Peak Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
5270	1.06	2.16	--	--	3.01	5.17	11.00	-5.83
5310	-0.23	2.21	--	--	3.01	5.22	11.00	-5.78

Measurement uncertainty:	±1.33 dB
---------------------------------	----------


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,270 MHz 802.11n HT-40 Power Spectral Density

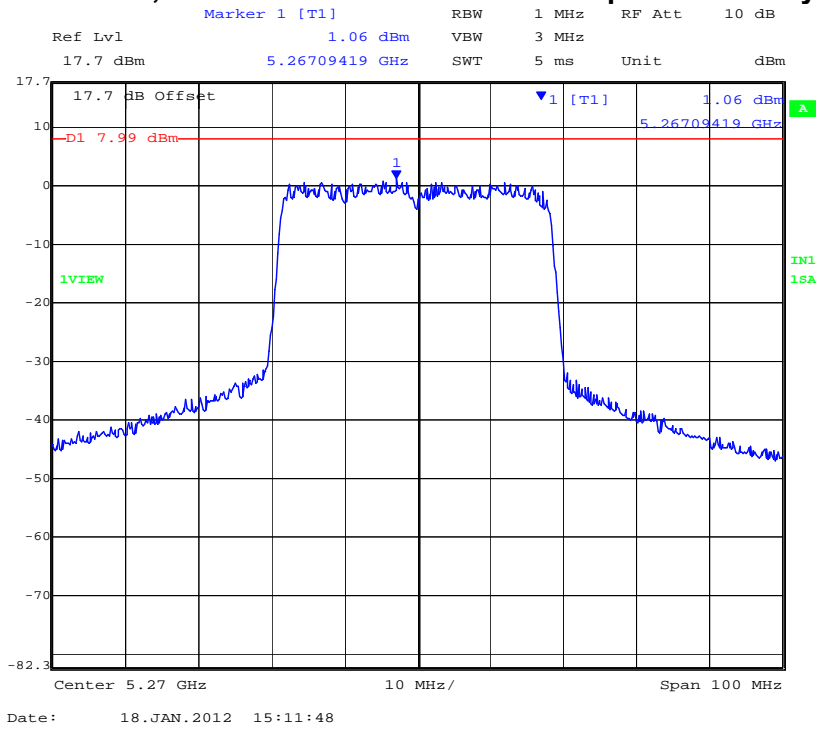


PORT B 5,270 MHz 802.11n HT-40 Power Spectral Density

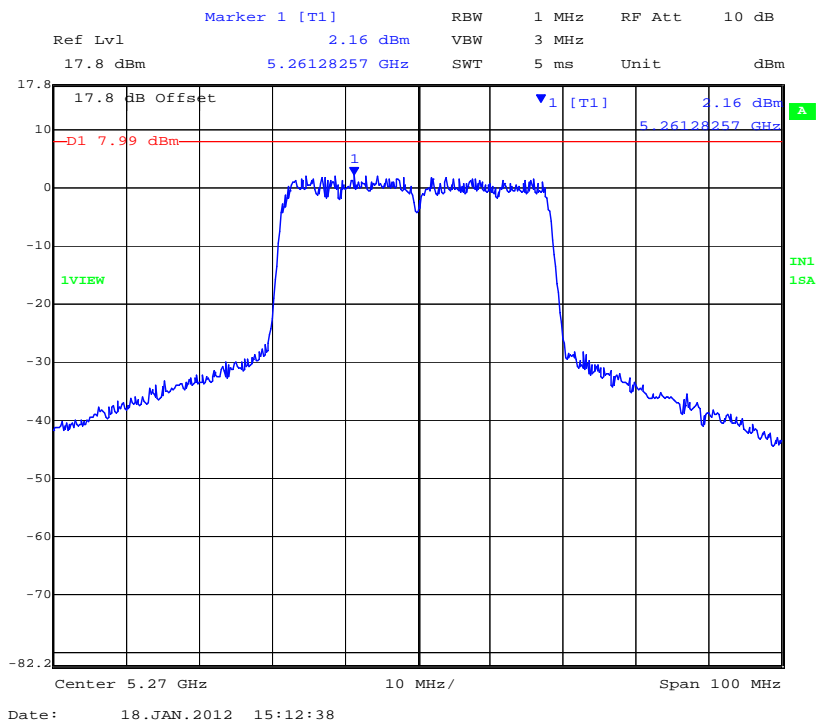


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,310 MHz 802.11n HT-40 Power Spectral Density

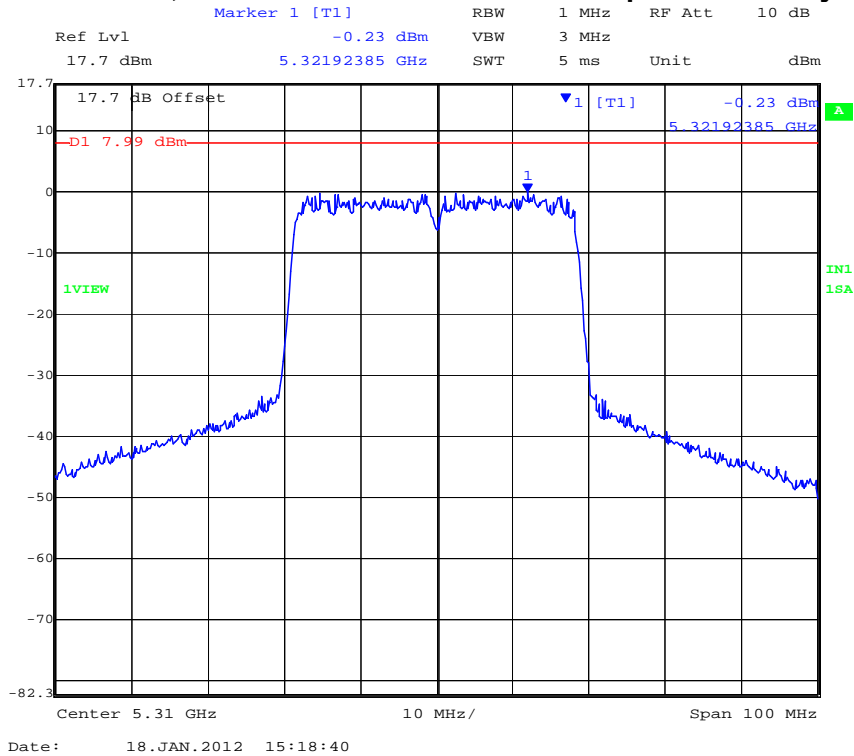

PORT B 5,310 MHz 802.11n HT-40 Power Spectral Density

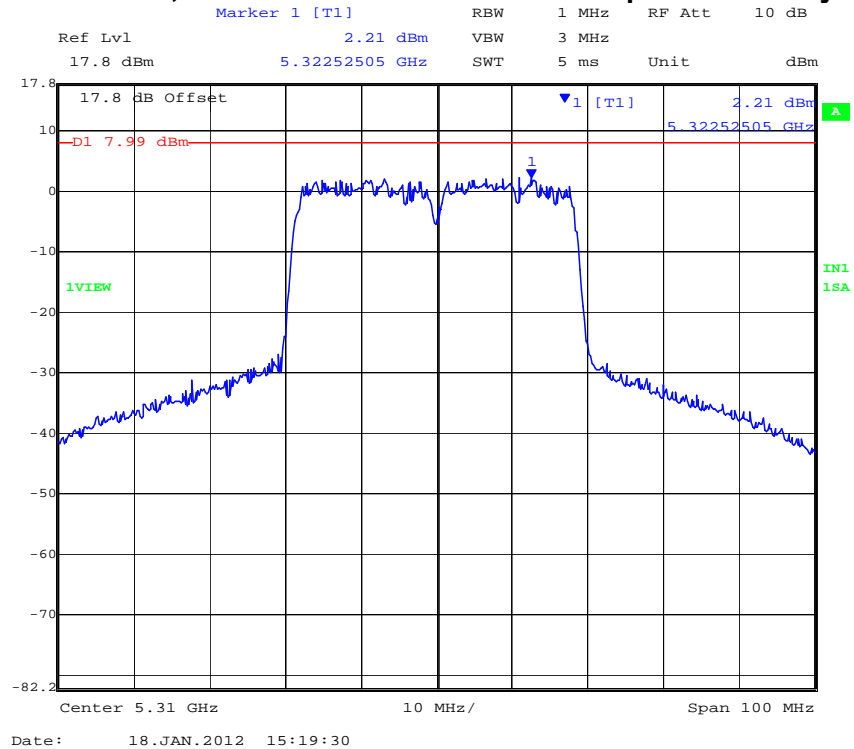

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 68 of 186

TABLE OF RESULTS – 802.11a, 5470 – 5725 MHz

Test Conditions:	15.407 (a)	Rel. Humidity (%):	35	to	42
Variant:	802.11a	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	6 dBi		
Applied Voltage:	12.0 Vdc	Antenna Ports (N):	2		
Notes 1:					
Notes 2:					


Test Frequency	Measured Peak Power				Correction factor	Peak Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
5500	7.24	7.10	--	--	3.01	10.25	11.00	-0.75
5580	6.16	7.35	--	--	3.01	10.36	11.00	-0.64
5700	5.52	6.39	--	--	3.01	9.40	11.00	-1.60

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT A 5,500 MHz 802.11a Legacy Power Spectral Density

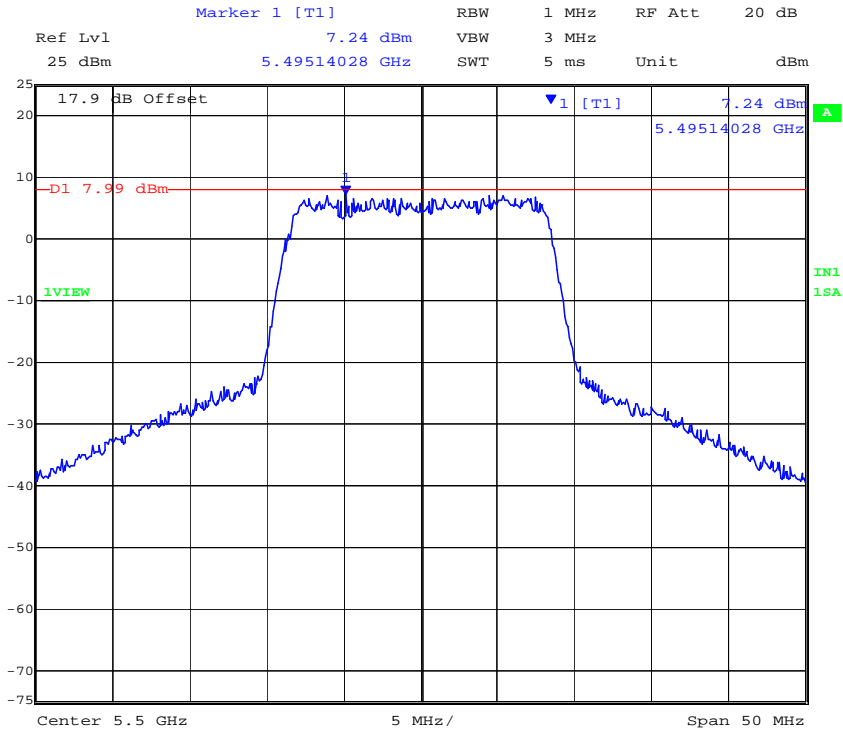

Date: 18.JAN.2012 09:50:48

PORT B 5,500 MHz 802.11a Legacy Power Spectral Density

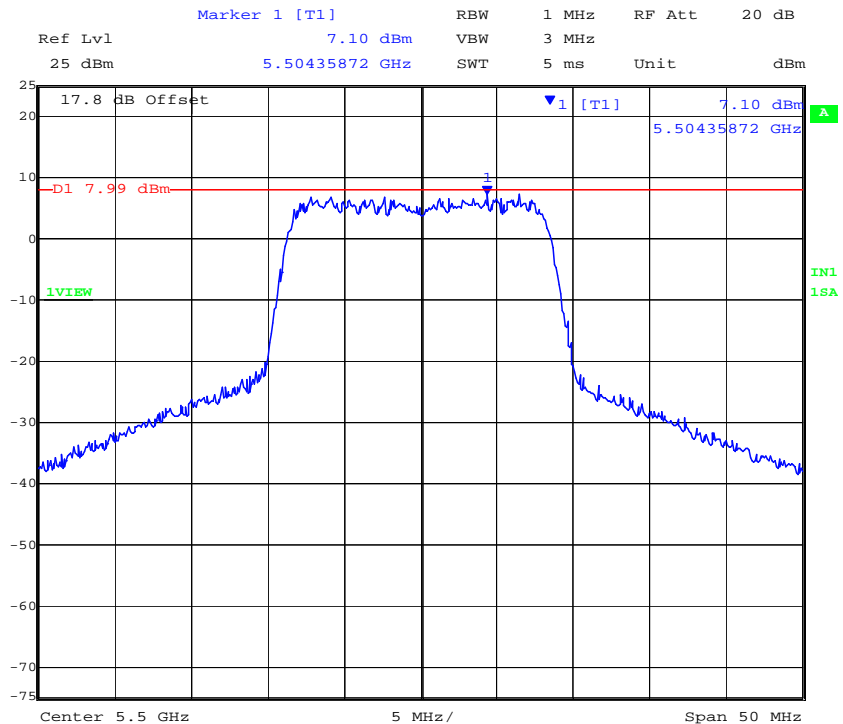


Date: 18.JAN.2012 09:51:38

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 70 of 186

PORT A 5,580 MHz 802.11a Legacy Power Spectral Density

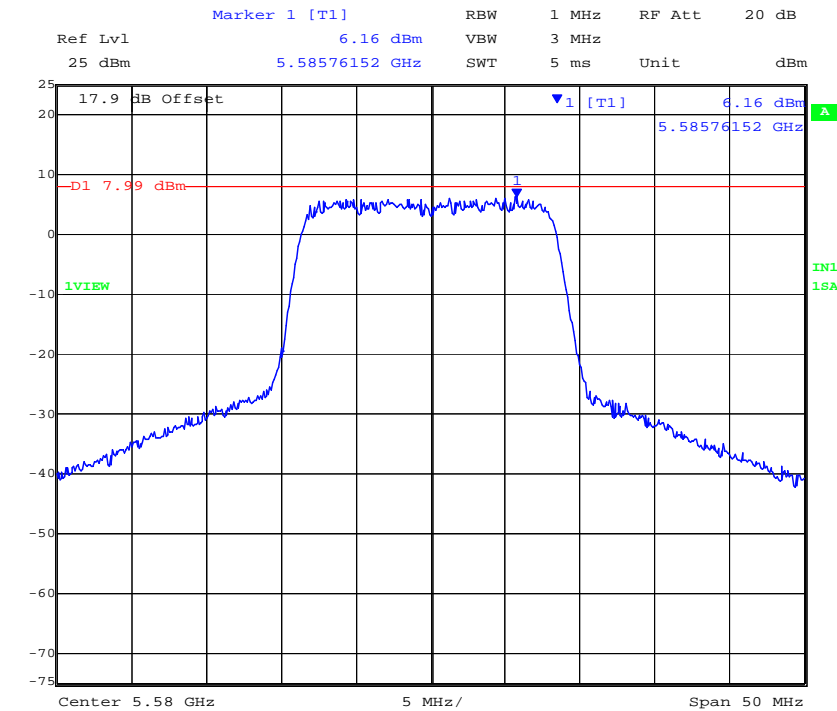

Date: 18.JAN.2012 18:56:00

PORT B 5,580 MHz 802.11a Legacy Power Spectral Density

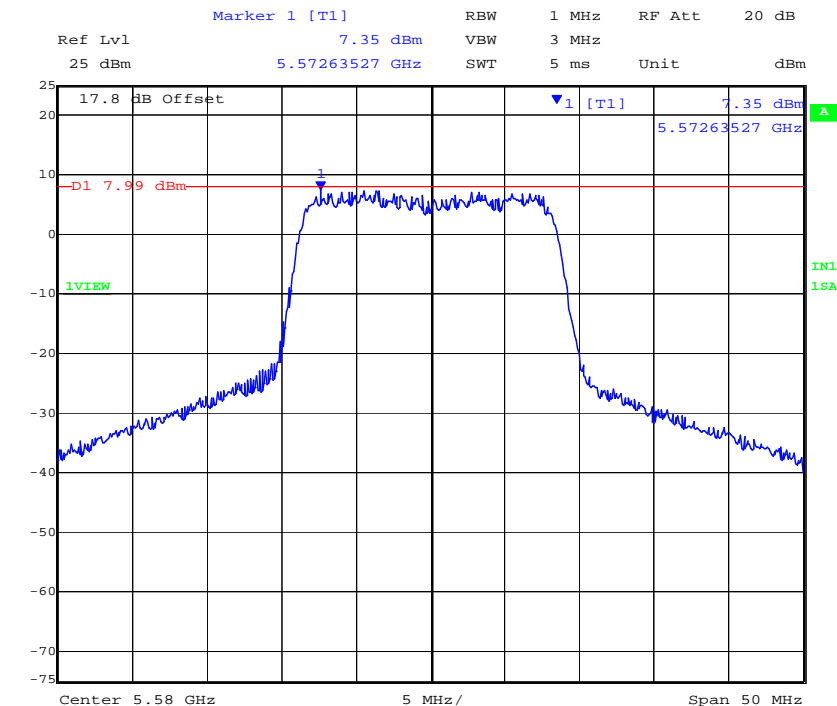


Date: 18.JAN.2012 18:56:51

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT A 5,700 MHz 802.11a Legacy Power Spectral Density

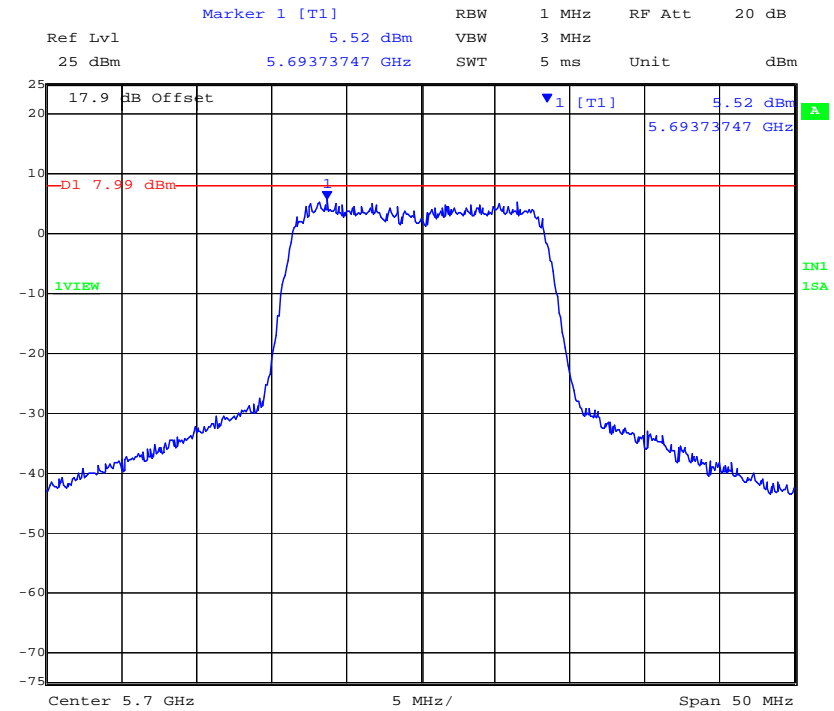

Date: 18.JAN.2012 10:14:04

PORT B 5,700 MHz 802.11a Legacy Power Spectral Density

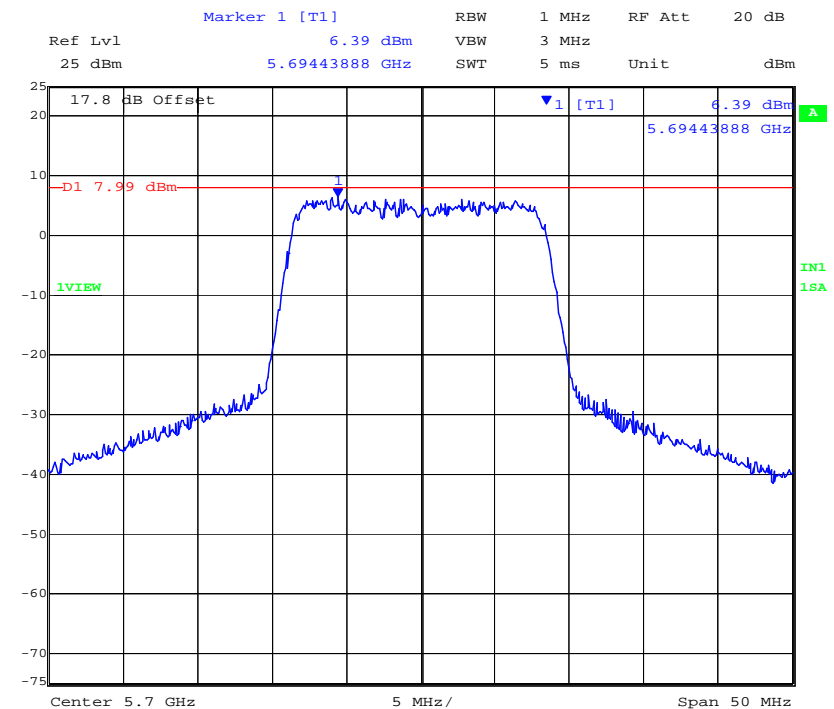

Date: 18.JAN.2012 10:14:55

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 72 of 186

TABLE OF RESULTS – 802.11n HT-20, 5470 – 5725 MHz

Test Conditions:	15.407 (a)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	6 dBi		
Applied Voltage:	12.0 Vdc	Antenna Ports (N):	2		
Notes 1:					
Notes 2:					


Test Frequency	Measured Peak Power				Correction factor	Peak Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
5500	6.27	6.55	--	--	3.01	9.56	11.00	-1.44
5580	7.61	7.27	--	--	3.01	10.62	11.00	-0.38
5700	4.77	5.15	--	--	3.01	8.16	11.00	-2.84

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT A 5,500 MHz 802.11n HT-20 Power Spectral Density

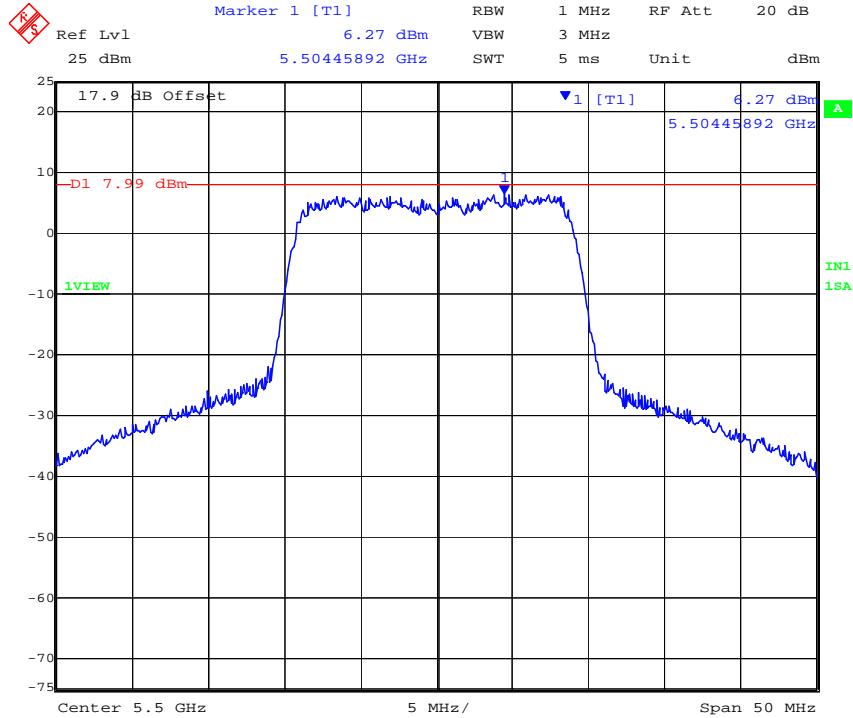

Date: 10.JAN.2012 19:37:37

PORT B 5,500 MHz 802.11n HT-20 Power Spectral Density

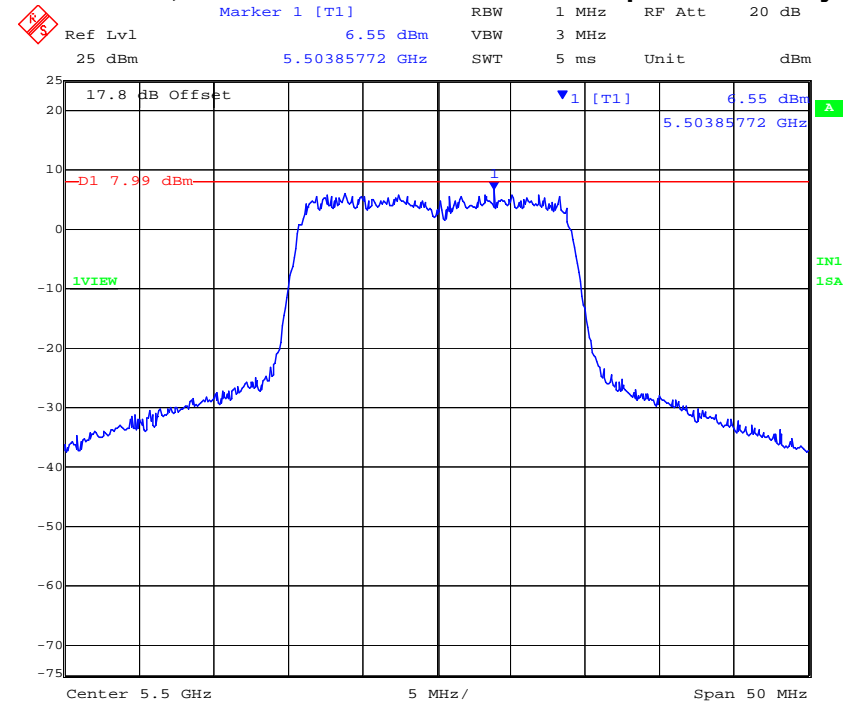


Date: 10.JAN.2012 19:38:27

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT A 5,580 MHz 802.11n HT-20 Power Spectral Density

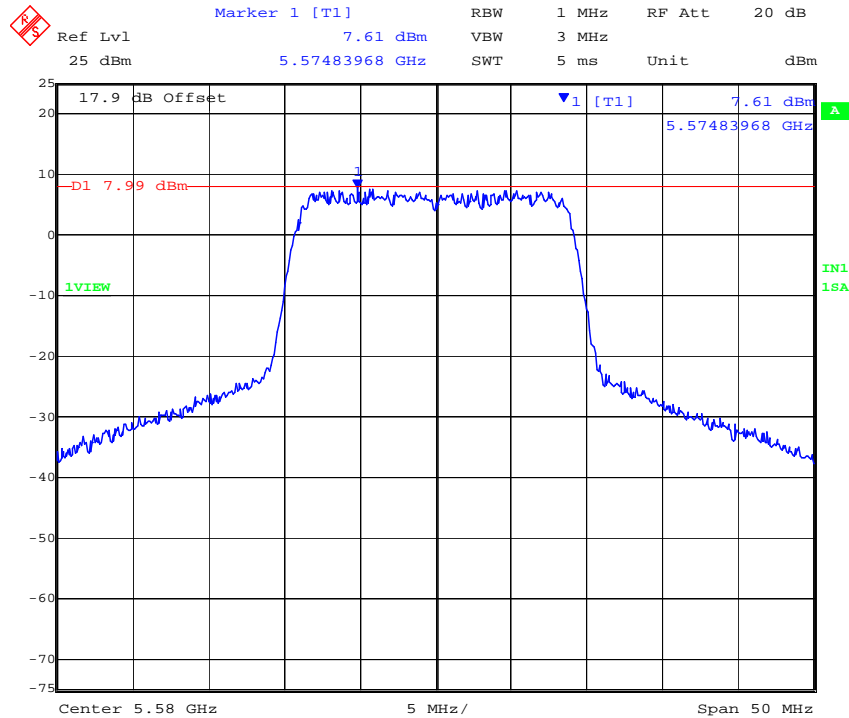

Date: 10.JAN.2012 19:44:25

PORT B 5,580 MHz 802.11n HT-20 Power Spectral Density

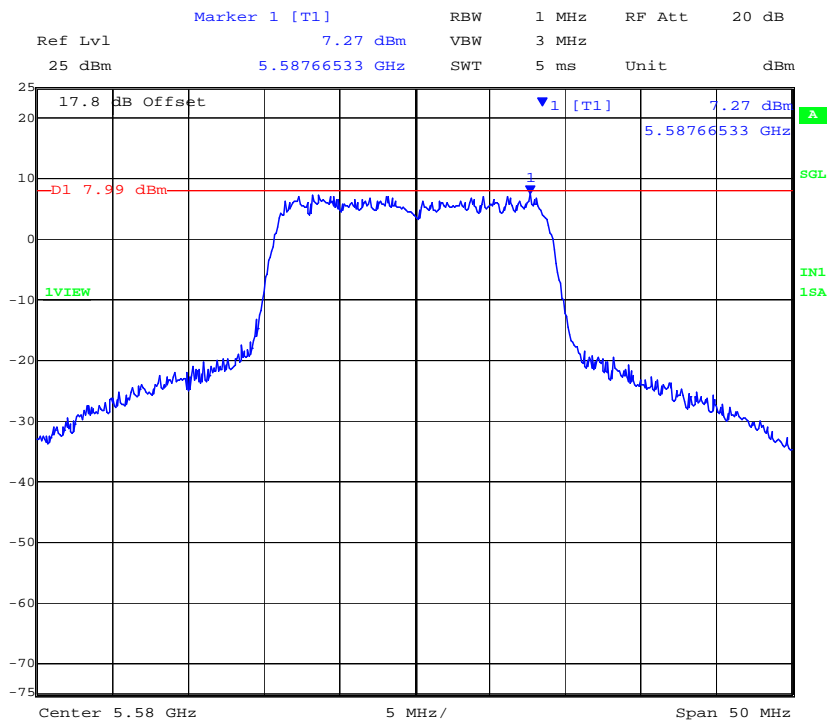


Date: 10.JAN.2012 19:45:35

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT A 5,700 MHz 802.11n HT-20 Power Spectral Density

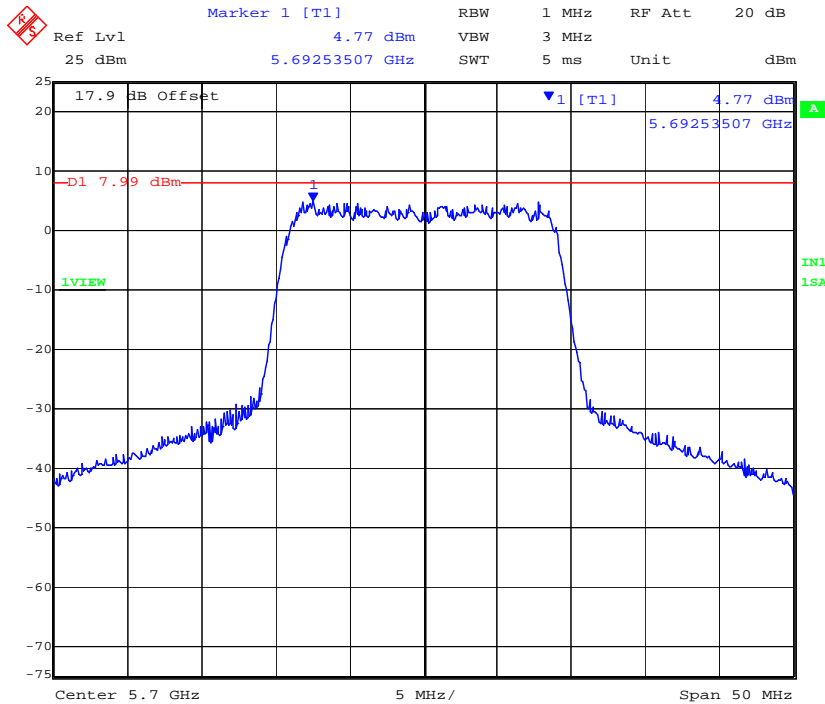

Date: 10.JAN.2012 19:51:25

PORT B 5,700 MHz 802.11n HT-20 Power Spectral Density

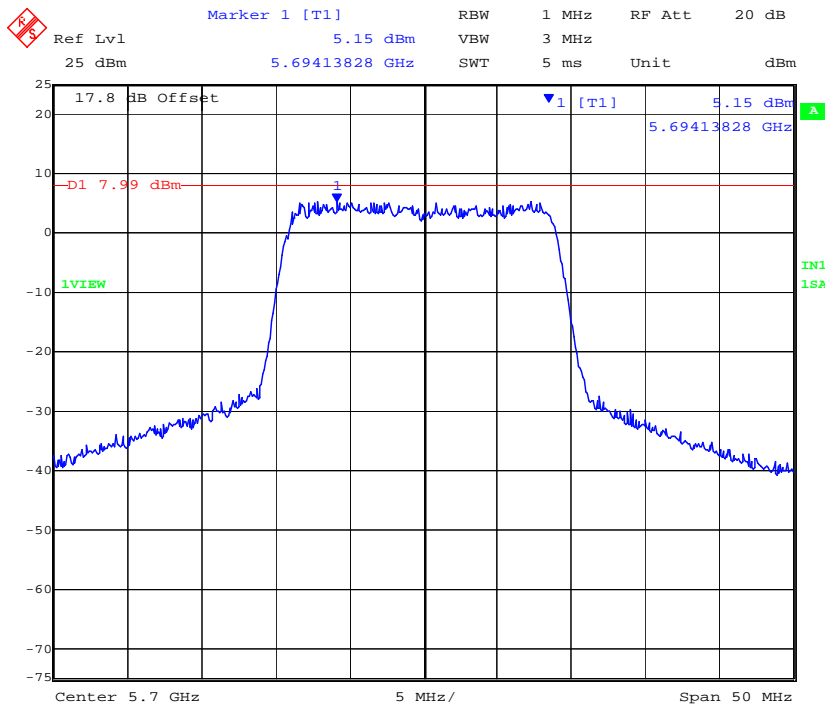

Date: 10.JAN.2012 19:52:15

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 76 of 186

TABLE OF RESULTS – 802.11n HT-40, 5470 – 5725 MHz

Test Conditions:	15.407 (a)	Rel. Humidity (%):	35 to 42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	6 dBi
Applied Voltage:	12.0 Vdc	Antenna Ports (N):	2
Notes 1:			
Notes 2:			


Test Frequency	Measured Peak Power				Correction factor	Peak Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
5510	2.25	2.65	--	--	3.01	5.66	11.00	-5.34
5550	2.88	3.13	--	--	3.01	6.14	11.00	-4.86
5670	2.32	3.25	--	--	3.01	6.26	11.00	-4.74

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT A 5,510 MHz 802.11n HT-40 Power Spectral Density

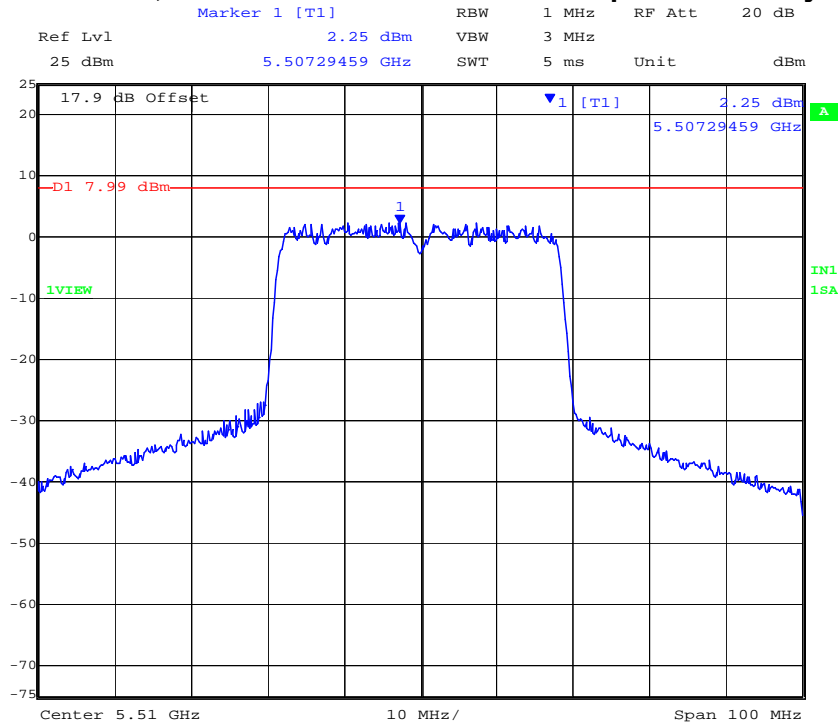

Date: 18.JAN.2012 10:26:30

PORT B 5,510 MHz 802.11n HT-40 Power Spectral Density

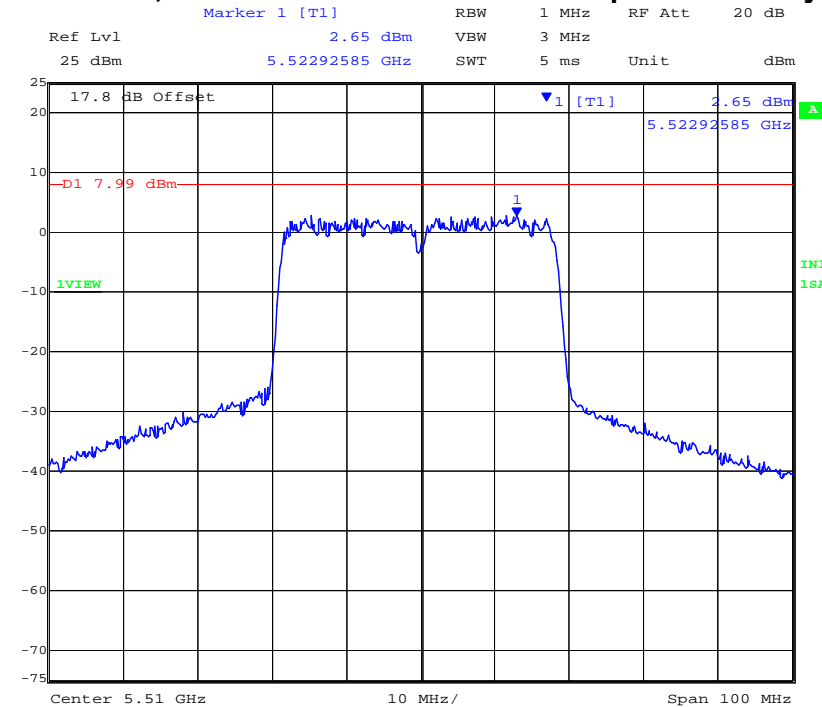


Date: 18.JAN.2012 10:27:20


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,550 MHz 802.11n HT-40 Power Spectral Density

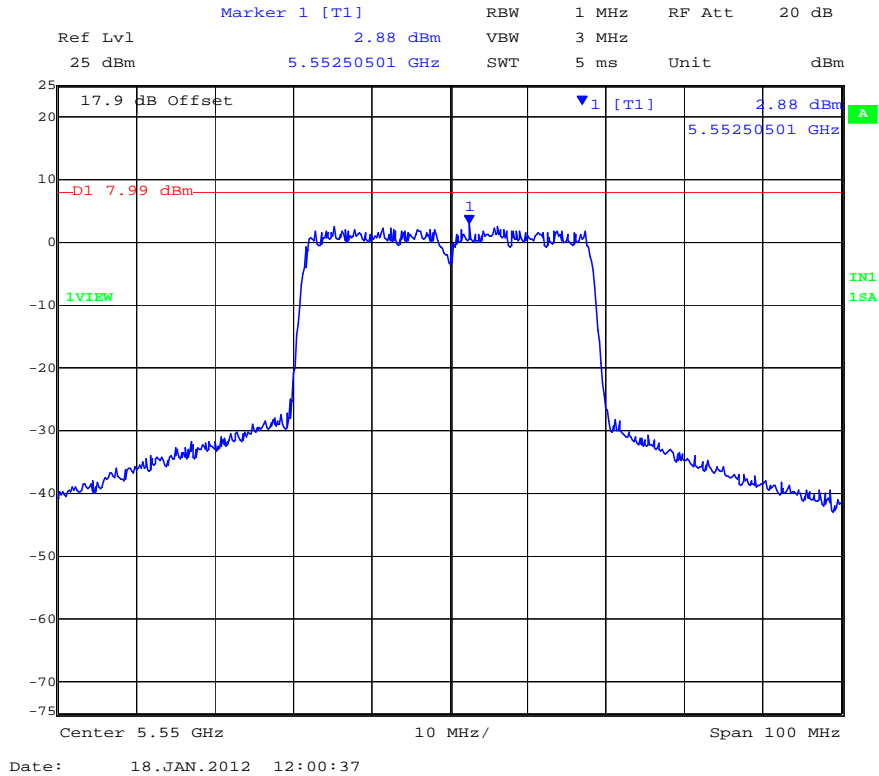


PORT B 5,550 MHz 802.11n HT-40 Power Spectral Density

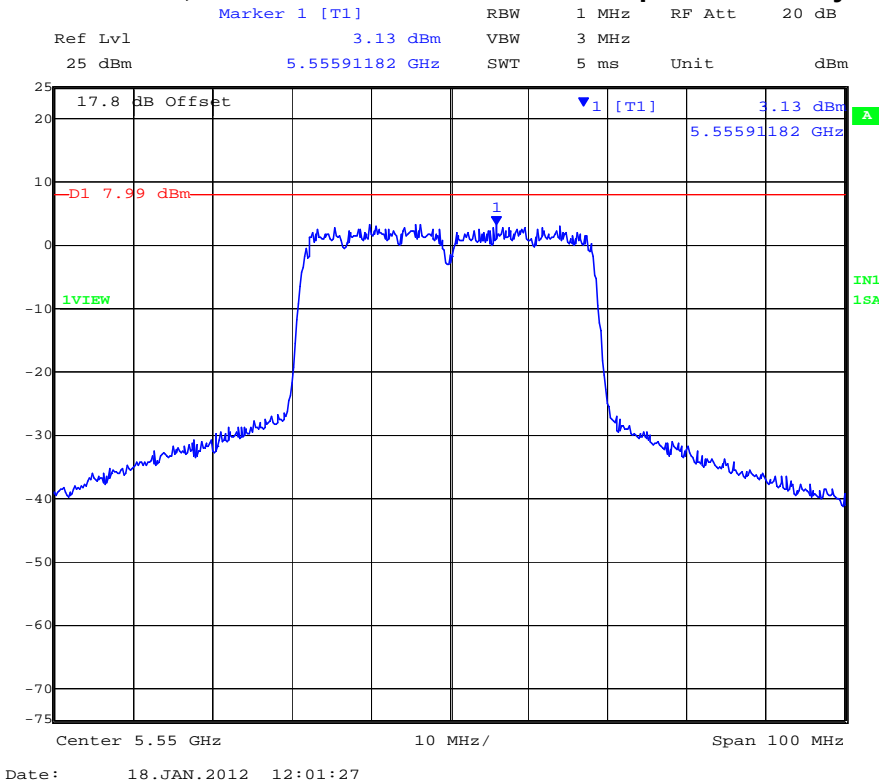

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT A 5,670 MHz 802.11n HT-40 Power Spectral Density

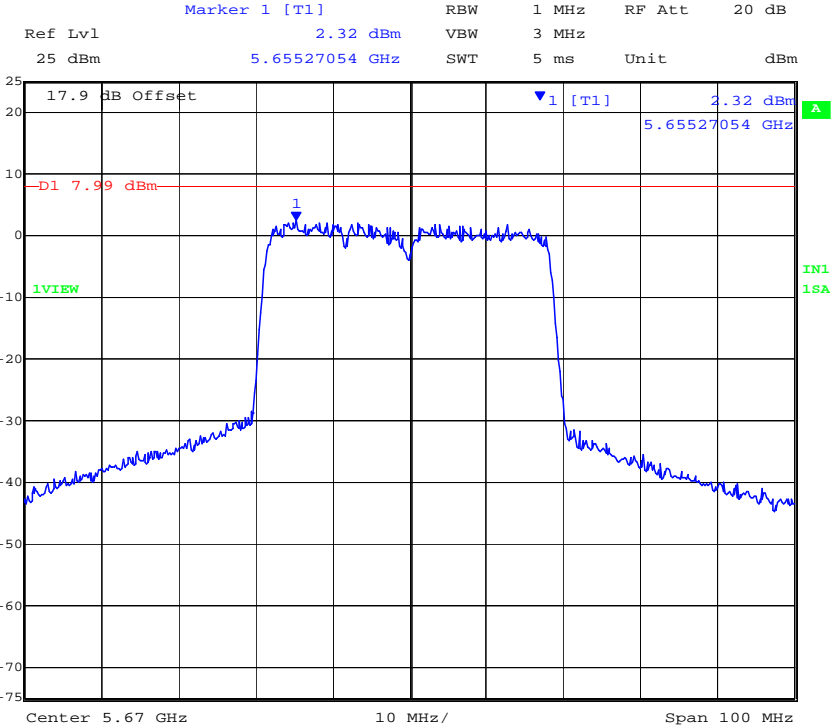

Date: 18.JAN.2012 12:08:44

PORT B 5,670 MHz 802.11n HT-40 Power Spectral Density

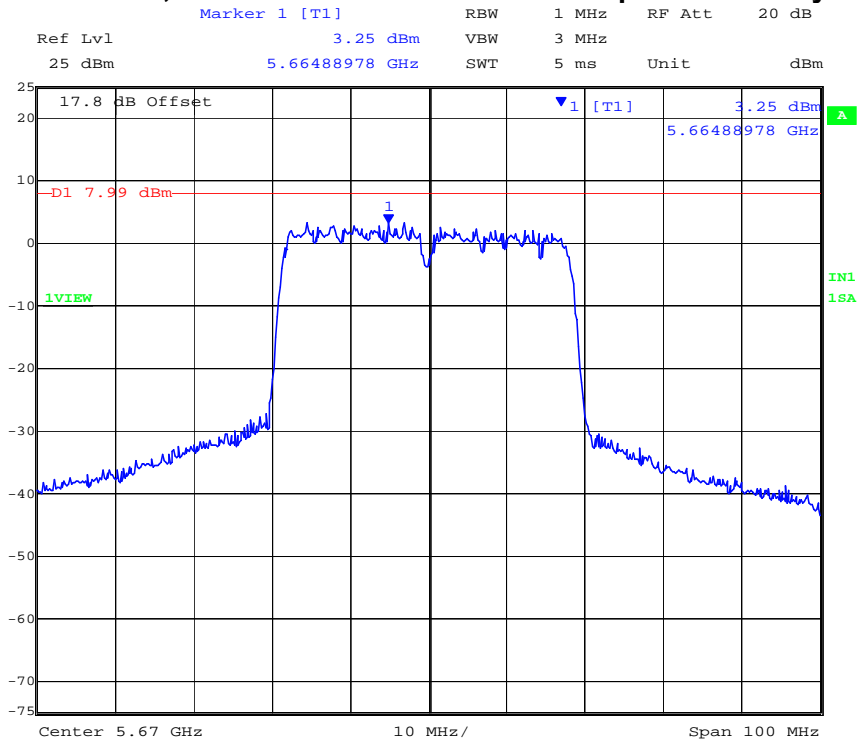

Date: 18.JAN.2012 12:09:34

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 80 of 186

Specification

FCC, Part 15 §15.407 (a)(1), (a)(2)

5150 – 5250 MHz

(a)(1) The peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

5250 – 5350 MHz & 5470 – 5725 MHz

(a)(2) The peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

Industry Canada RSS-210 § A9.2(1), A9.2(2)

5150 – 5250 MHz

§ A9.2(1) The eirp spectral density shall not exceed +10 dBm in any 1 MHz band

5250 – 5350 MHz & 5470 – 5725 MHz

§ A9.2(2) The power spectral density shall not exceed +11 dBm in any 1 MHz band

Laboratory Measurement Uncertainty for Spectral Density

Measurement uncertainty	±1.33 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-01 'Measuring RF Output Power'	0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5.1.4. Peak Excursion Ratio

FCC, Part 15 Subpart C §15.407(a)(6)

Test Procedure

Normative Reference (xi) Section 2.1 Measurement Procedure DA 02-2138 “Measurement Procedure Updated for Peak Transmit Power in the UNII Bands” was implemented to determine the Peak Excursion Ratio. This is a conducted measurement using a spectrum analyzer. The Peak Excursion Ratio is the difference in amplitude (dB) between the two traces.

Test Measurement Set up

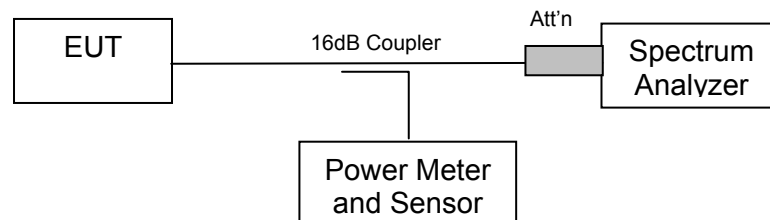

Measurement set up for Peak Excursion Ratio

Measurement Results for Peak Excursion Ratio

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57% Pressure: 999 to 1012 mbar

Radio Parameters

Duty Cycle: 100%

Output: Modulated Carrier

Power: Maximum Default Power



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 82 of 186

TABLE OF RESULTS – 802.11a Legacy 5250 – 5350 MHz

Test Conditions:	15.407 (a)	Rel. Humidity (%):	35	to	42
Variant:	802.11a	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	6 dBi		
Applied Voltage:	12.0 Vdc				
Notes 1:					
Notes 2:					


Test Frequency	Trace Δ Marker				Limit	Margin
	Port A	Port B	Port C	Port D		
MHz	dB	dB	dB	dB	dB	dB
5260	-11.71	-10.97	--	--	-13.00	-1.29
5300	-12.24	-10.48	--	--		-0.77
5320	-12.45	-10.48	--	--		-0.55

Measurement uncertainty:	±1.33 dB
---------------------------------	----------


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,260 MHz, 802.11a Legacy, Peak Excursion Ratio

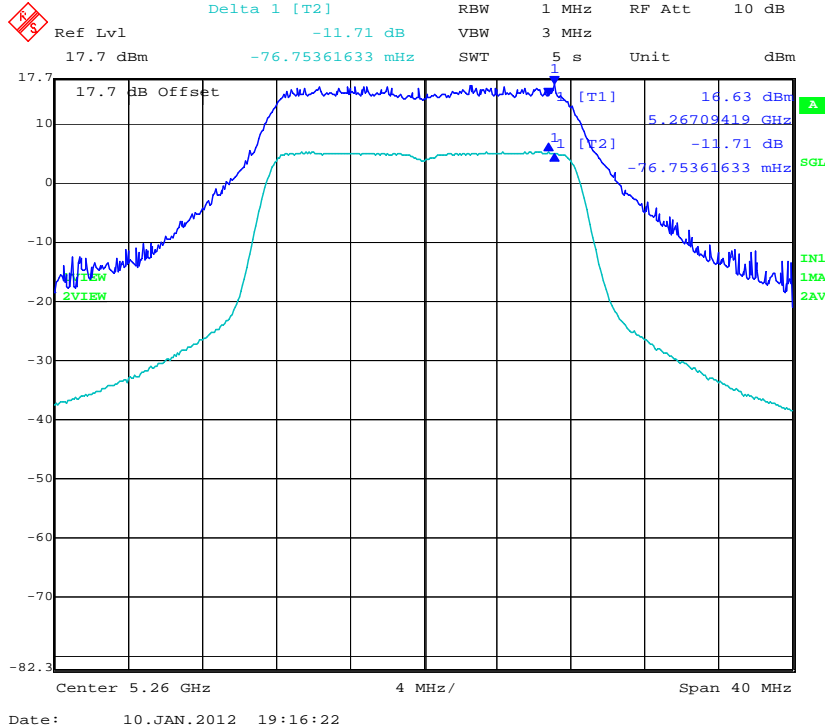


PORT B 5,260 MHz, 802.11a Legacy, Peak Excursion Ratio

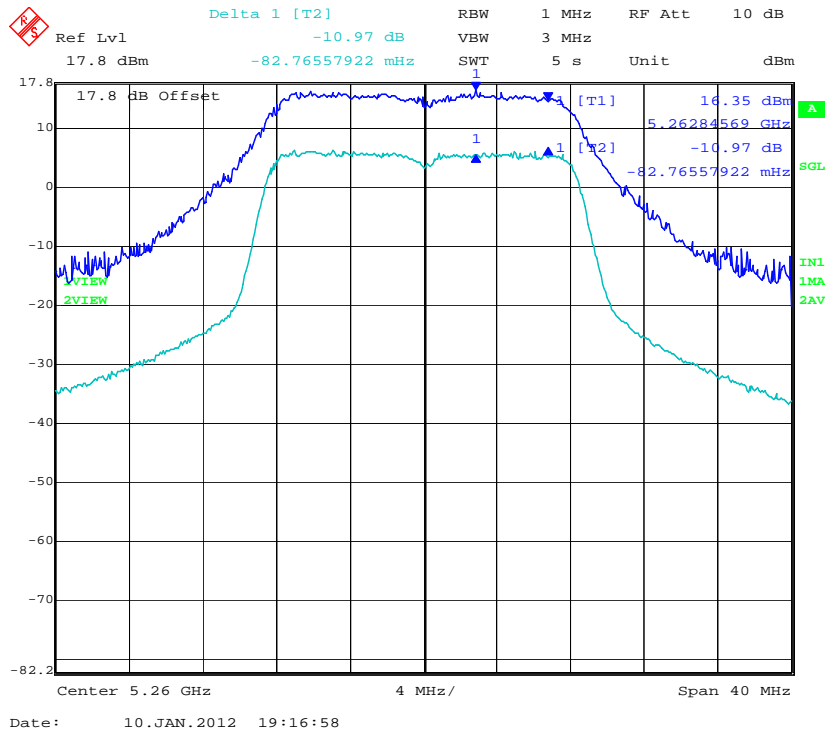


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,320 MHz 802.11a Legacy Peak Excursion Ratio

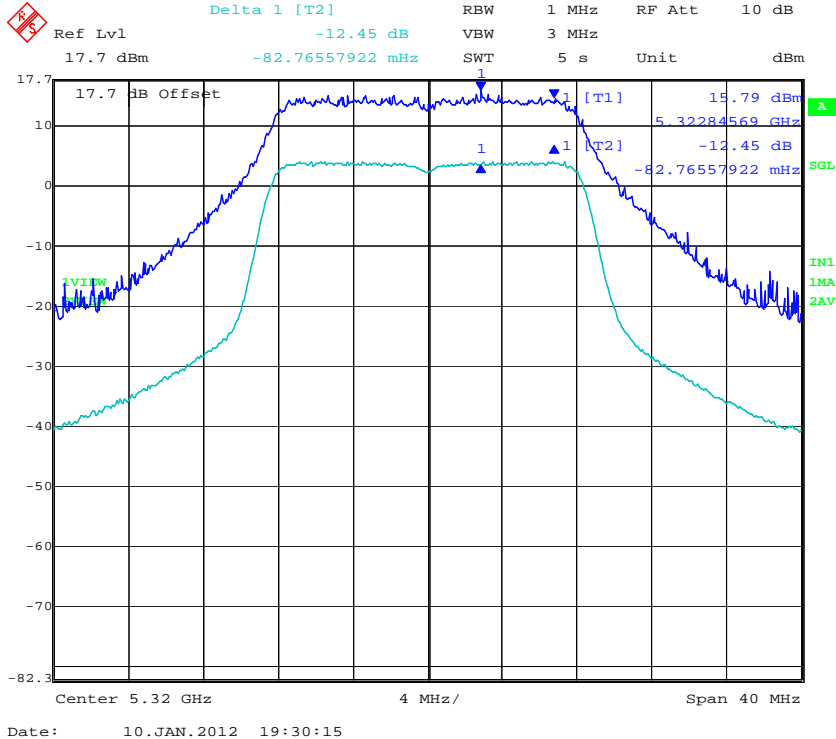

PORT B 5,320 MHz 802.11a Legacy Peak Excursion Ratio

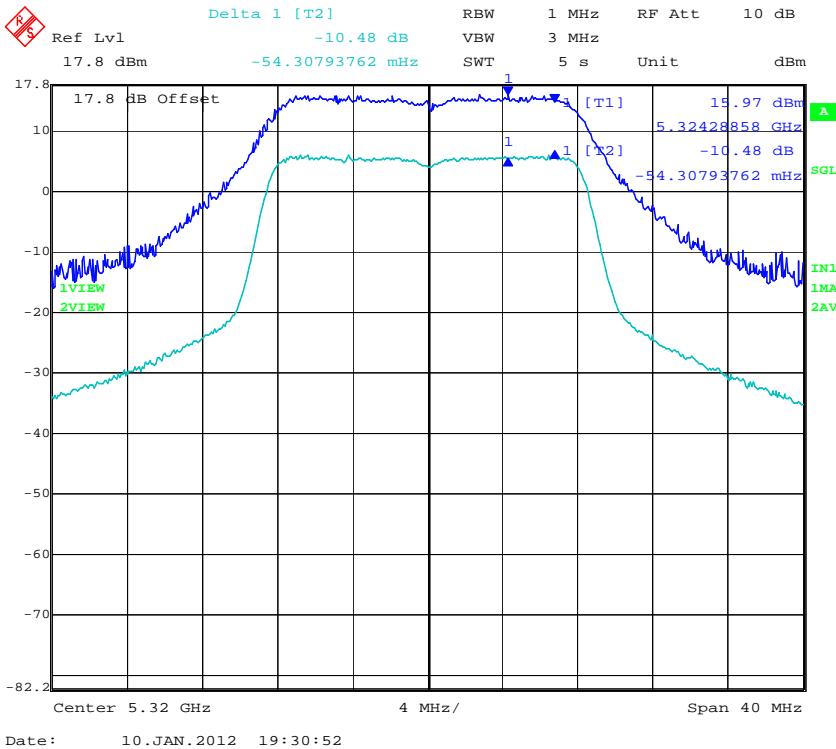

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 86 of 186

TABLE OF RESULTS – 802.11n HT-20 5250 – 5350 MHz

Test Conditions:	15.407 (a)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	6 dBi		
Applied Voltage:	12.0 Vdc				
Notes 1:					
Notes 2:					


Test Frequency	Trace Δ Marker				Limit	Margin
	Port A	Port B	Port C	Port D		
MHz	dB	dB	dB	dB	dB	dB
5260	-10.66	-10.71	--	--	-13.00	-2.29
5300	-11.18	-10.77	--	--		-1.82
5320	-10.78	-11.18	--	--		-1.82

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT A 5,260 MHz 802.11n HT-20 Peak Excursion Ratio

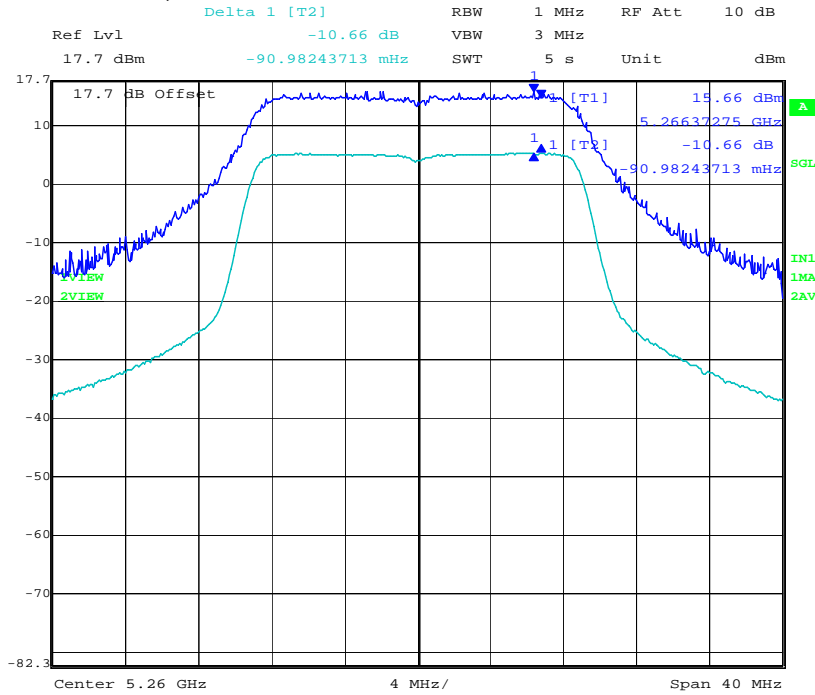

Date: 18.JAN.2012 12:19:34

PORT B 5,260 MHz 802.11n HT-20 Peak Excursion Ratio

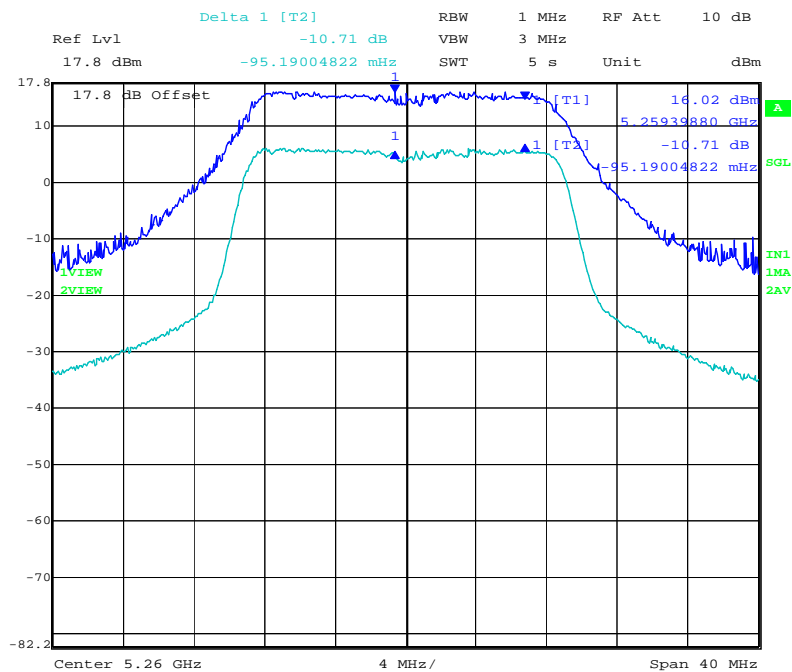


Date: 18.JAN.2012 12:20:11

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT A 5,300 MHz 802.11n HT-20 Peak Excursion Ratio

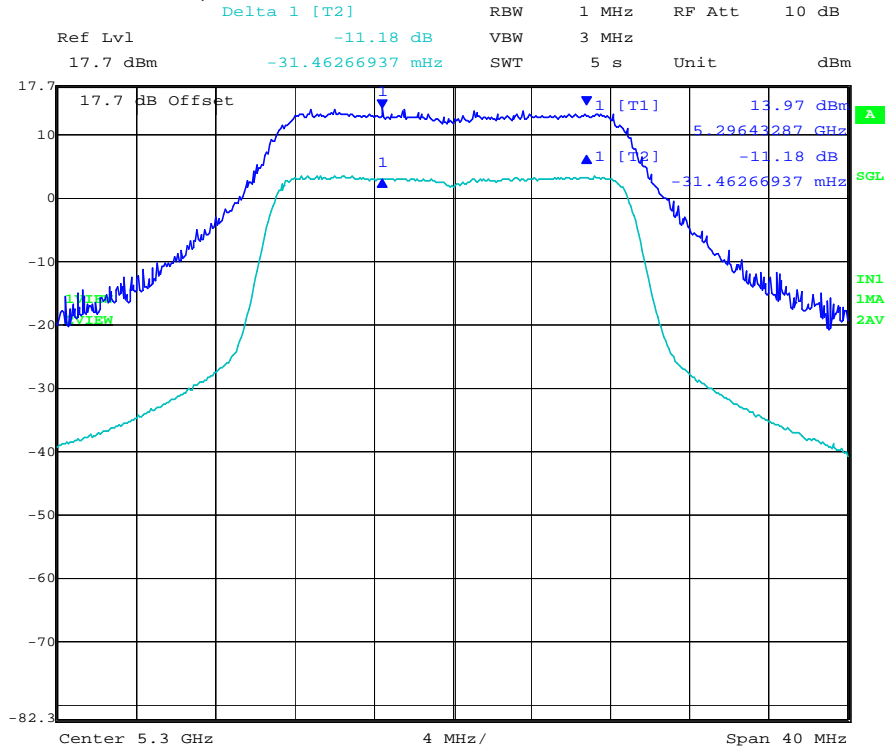

Date: 18.JAN.2012 13:46:52

PORT B 5,300 MHz 802.11n HT-20 Peak Excursion Ratio

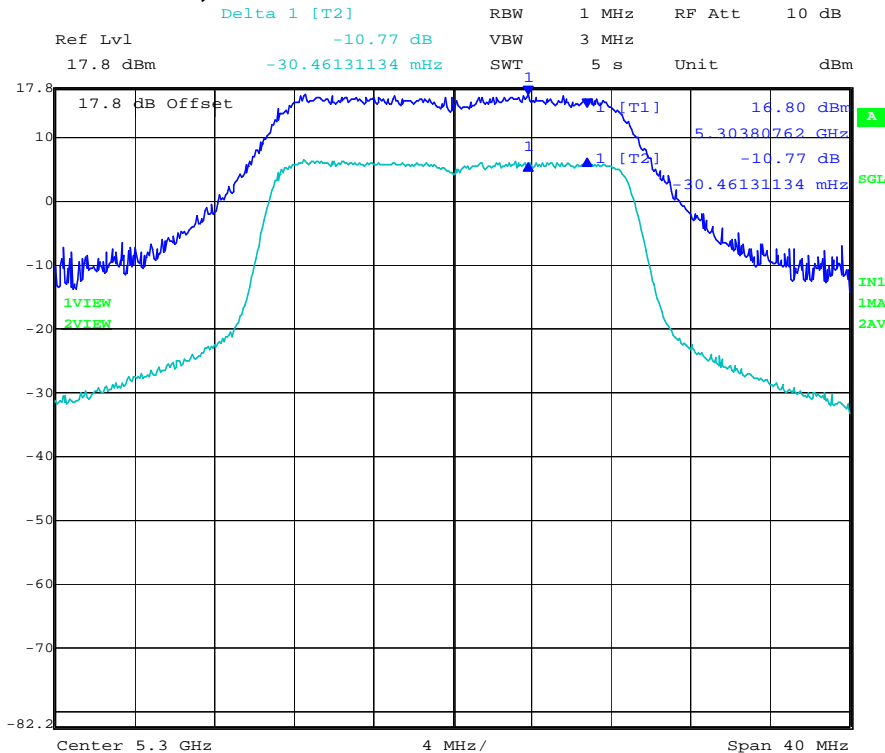


Date: 18.JAN.2012 13:47:28

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT A 5,320 MHz 802.11n HT-20 Peak Excursion Ratio

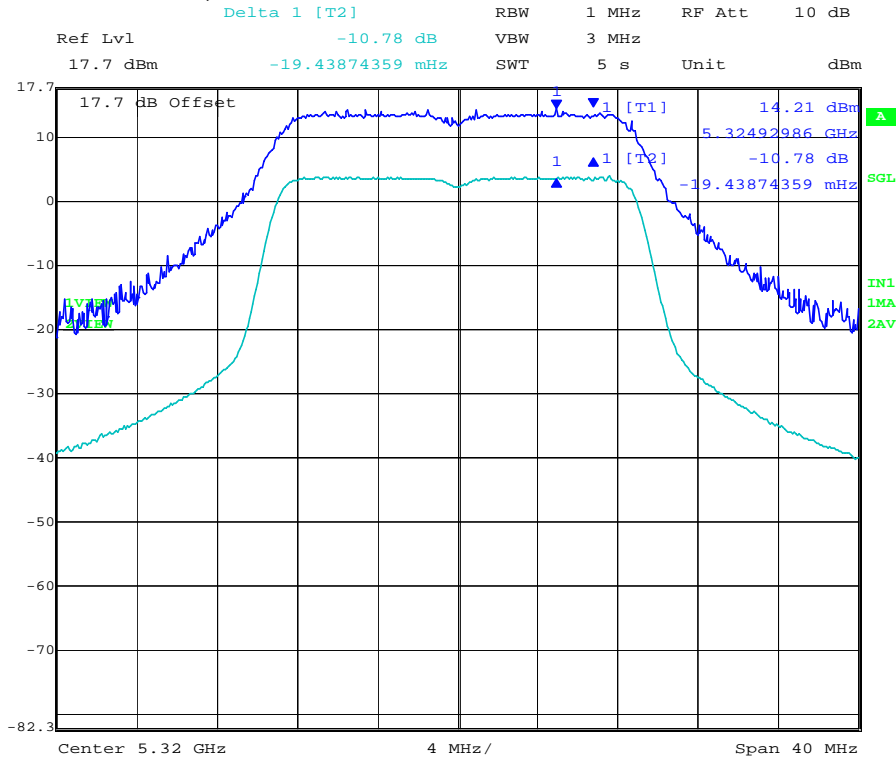

Date: 18.JAN.2012 14:46:08

PORT B 5,320 MHz 802.11n HT-20 Peak Excursion Ratio

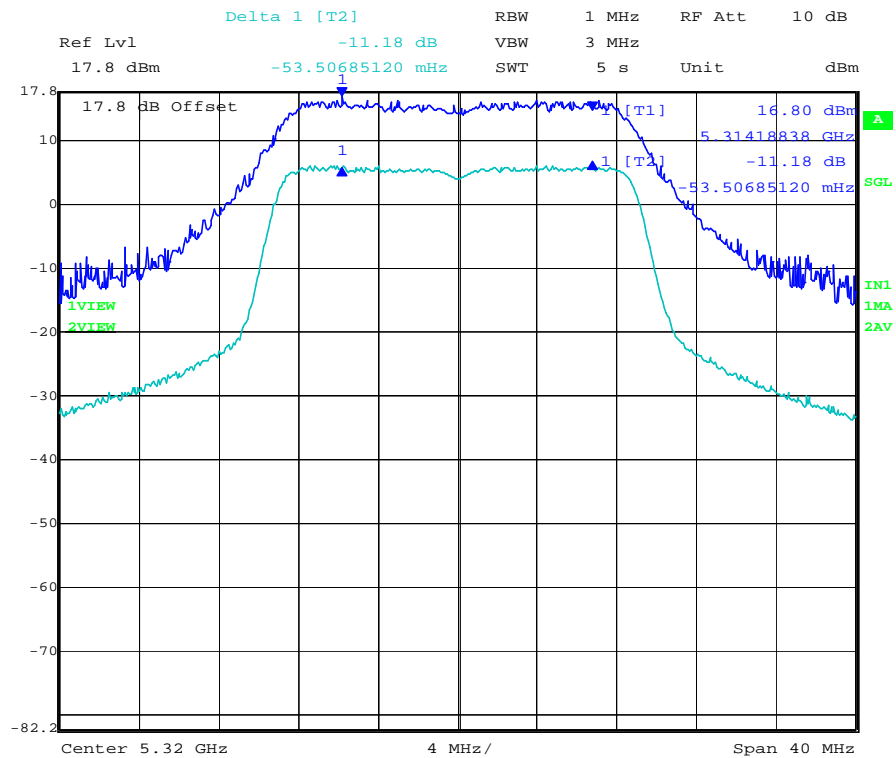

Date: 18.JAN.2012 14:46:45

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 90 of 186

TABLE OF RESULTS – 802.11n HT-40 5250 – 5350 MHz

Test Conditions:	15.407 (a)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	6 dBi		
Applied Voltage:	12.0 Vdc				
Notes 1:					
Notes 2:					


Test Frequency	Trace Δ Marker				Limit	Margin
	Port A	Port B	Port C	Port D		
MHz	dB	dB	dB	dB	dB	dB
5270	-11.23	-11.44	--	--	-13.00	-1.57
5310	-11.53	-11.45	--	--		-1.47

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT A 5,270 MHz 802.11n HT-40 Peak Excursion Ratio

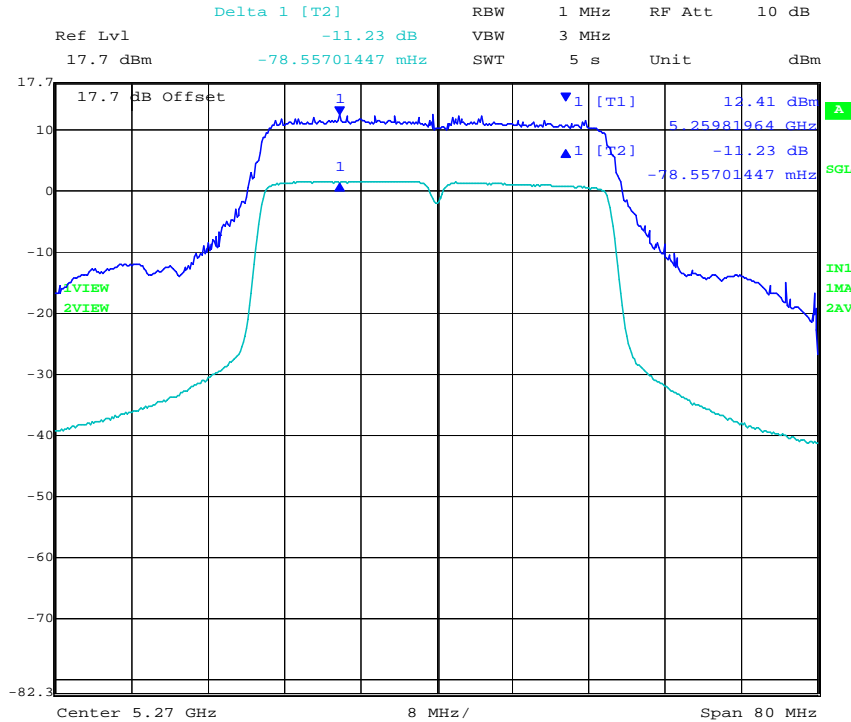

Date: 18.JAN.2012 15:31:38

PORT B 5,270 MHz 802.11n HT-40 Peak Excursion Ratio

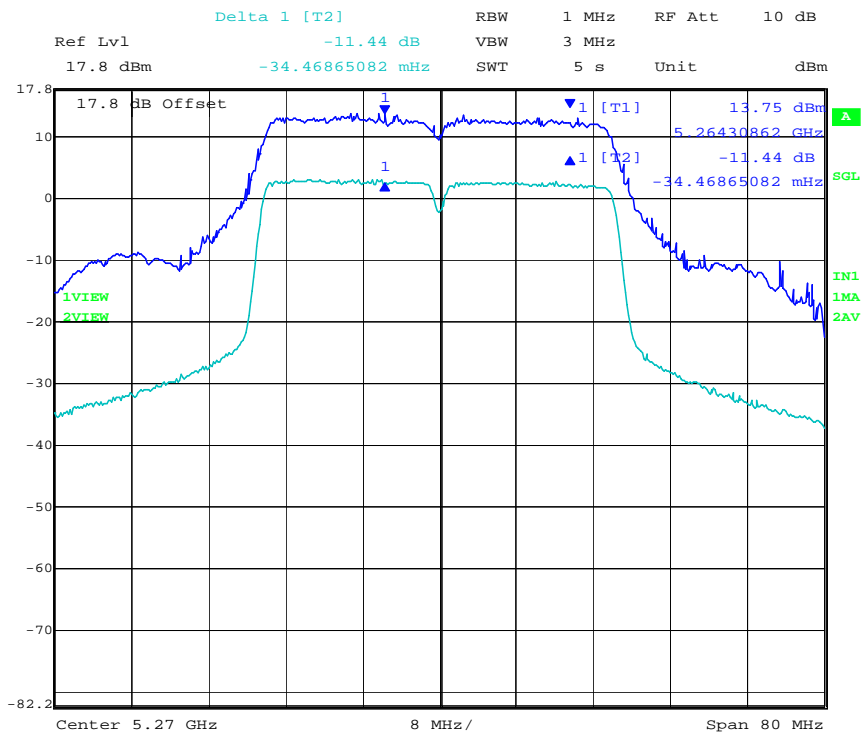


Date: 18.JAN.2012 15:32:15

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT A 5,310 MHz 802.11n HT-40 Peak Excursion Ratio

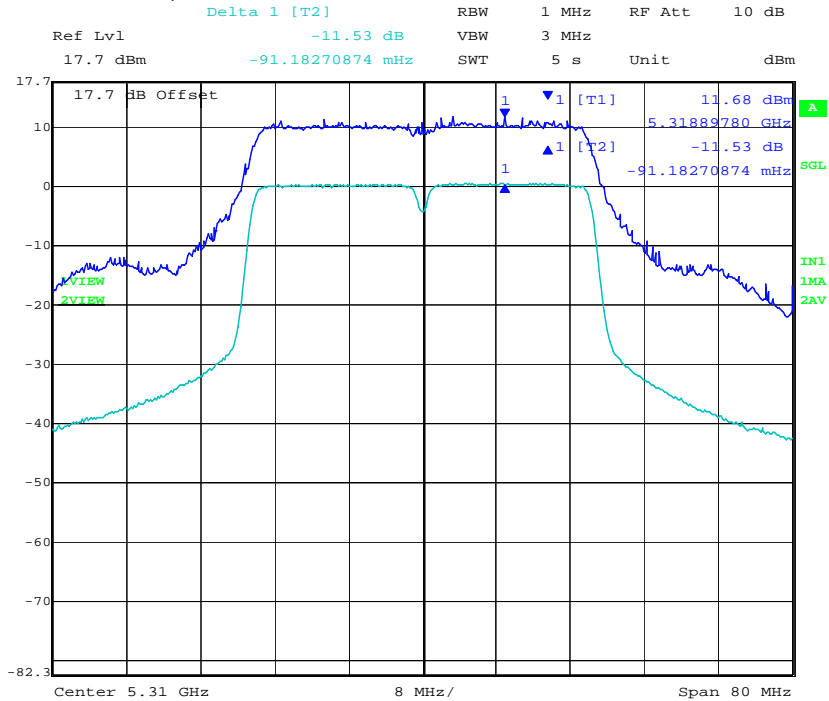

Date: 18.JAN.2012 15:20:33

PORT B 5,310 MHz 802.11n HT-40 Peak Excursion Ratio

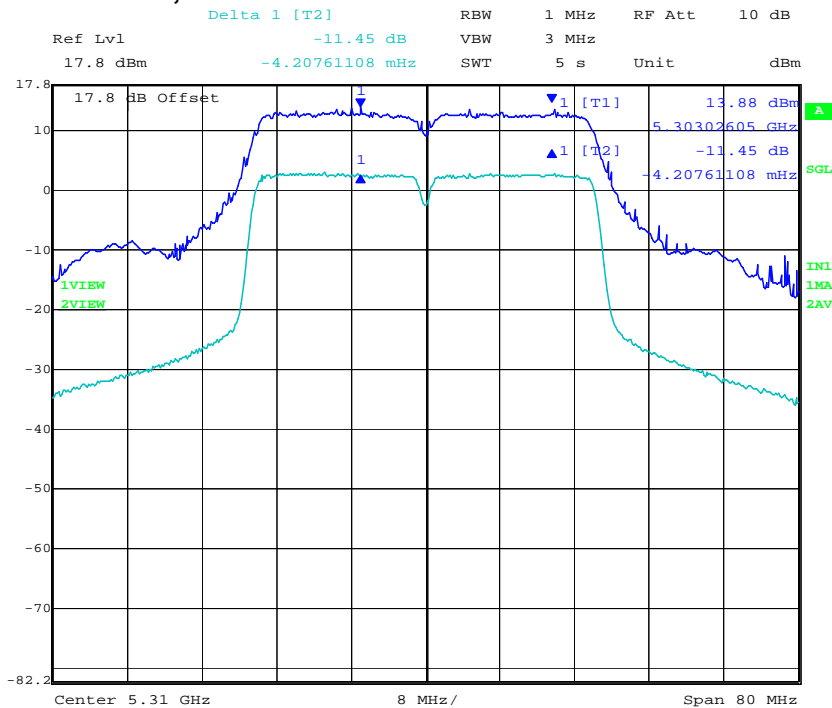

Date: 18.JAN.2012 15:21:10

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 93 of 186

TABLE OF RESULTS – 802.11a Legacy 5470 – 5725 MHz

Test Conditions:	15.407 (a)	Rel. Humidity (%):	35	to	42
Variant:	802.11a	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	6 dBi		
Applied Voltage:	12.0 Vdc				
Notes 1:					
Notes 2:					


Test Frequency	Trace Δ Marker				Limit	Margin
	Port A	Port B	Port C	Port D		
MHz	dB	dB	dB	dB	dB	dB
5500	-11.54	-11.31	--	--	-13.00	-1.46
5580	-12.08	-11.15	--	--		-0.93
5700	-12.53	-10.72	--	--		-0.47

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT A 5,500 MHz, 802.11a Legacy, Peak Excursion Ratio

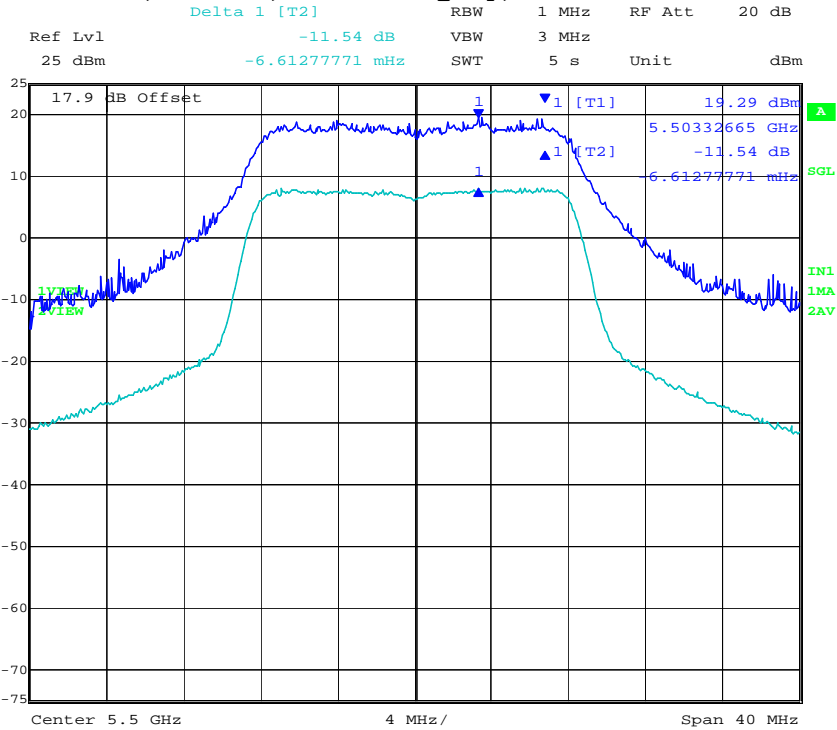

Date: 18.JAN.2012 09:52:40

PORT B 5,500 MHz, 802.11a Legacy, Peak Excursion Ratio

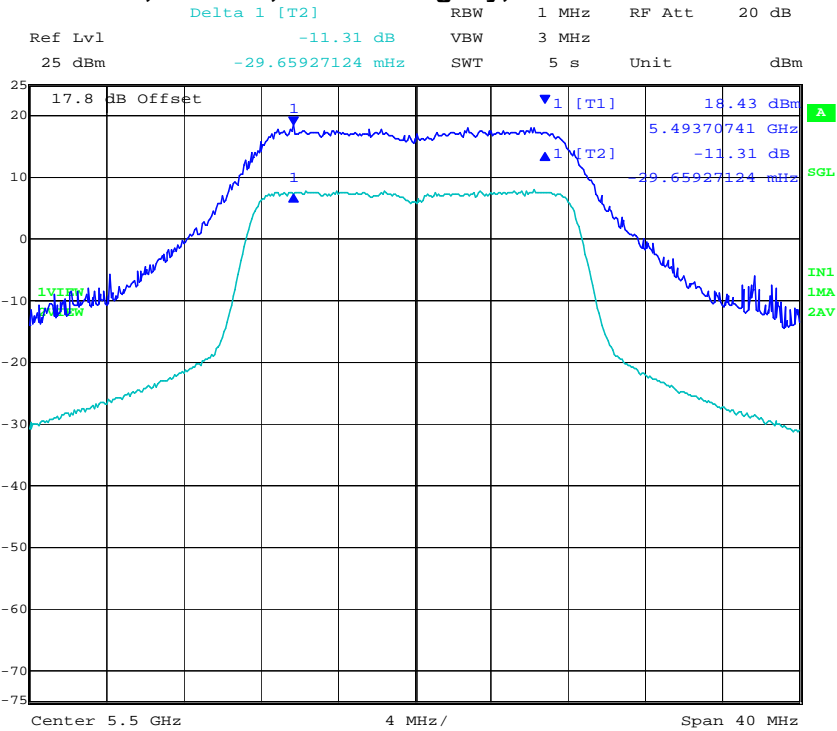


Date: 18.JAN.2012 09:53:17

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT A 5,580 MHz 802.11a Legacy Peak Excursion Ratio

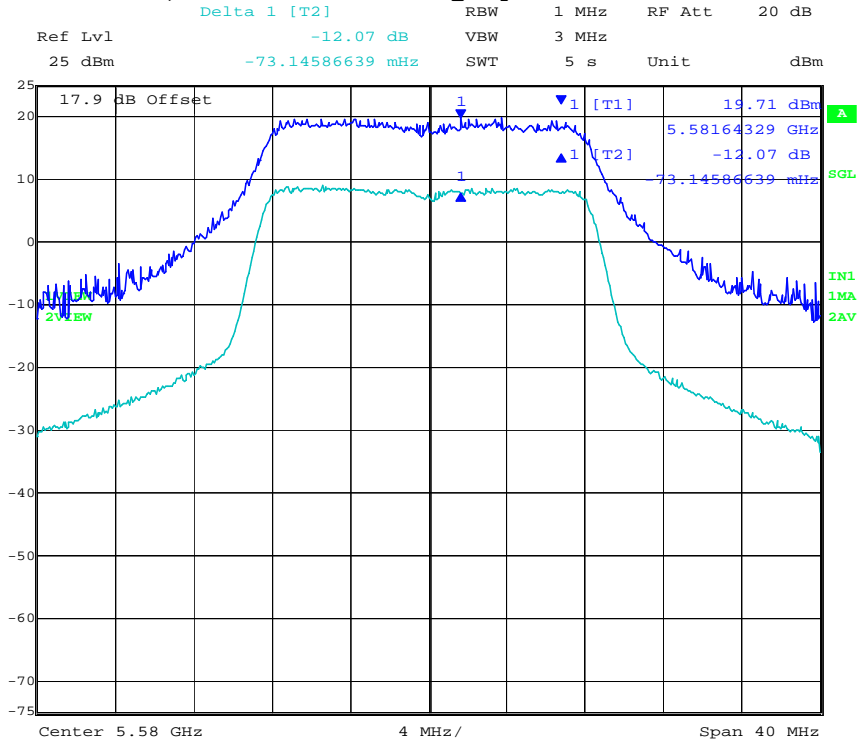

Date: 18.JAN.2012 10:00:34

PORT B 5,580 MHz 802.11a Legacy Peak Excursion Ratio

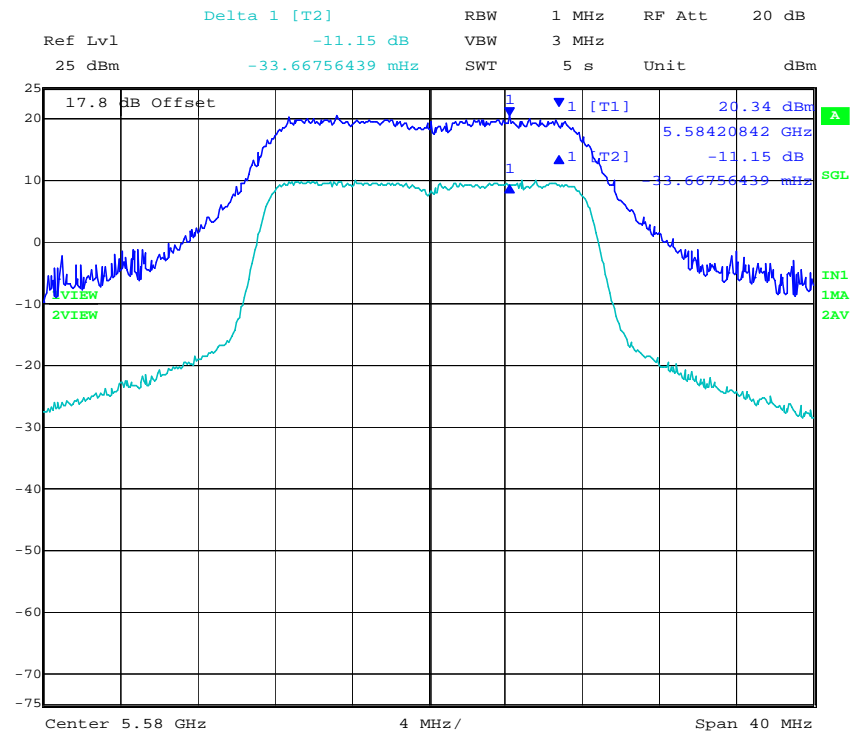


Date: 18.JAN.2012 10:01:13

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT A 5,700 MHz 802.11a Legacy Peak Excursion Ratio

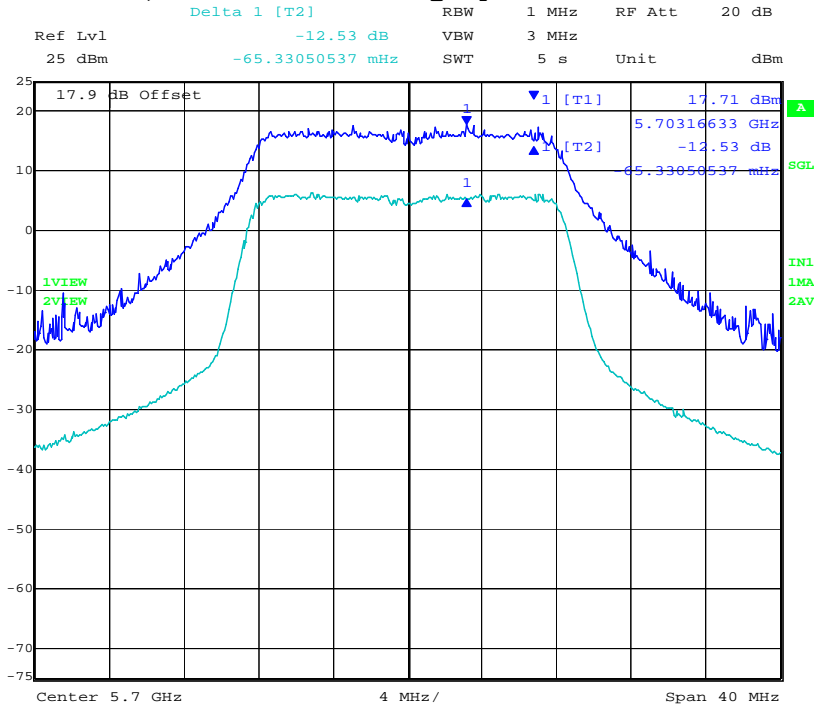

Date: 18.JAN.2012 10:15:58

PORT B 5,700 MHz 802.11a Legacy Peak Excursion Ratio

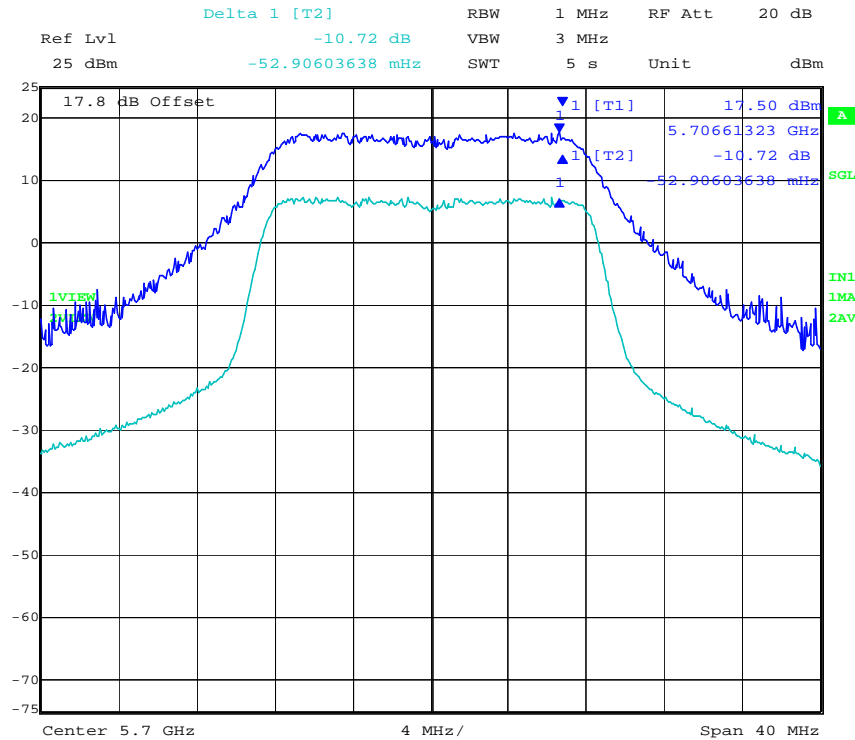

Date: 18.JAN.2012 10:16:35

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 97 of 186

TABLE OF RESULTS – 802.11n HT-20, 5470 – 5725 MHz

Test Conditions:	15.407 (a)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	6 dBi		
Applied Voltage:	12.0 Vdc				
Notes 1:					
Notes 2:					


Test Frequency	Trace Δ Marker				Limit	Margin
	Port A	Port B	Port C	Port D		
MHz	dB	dB	dB	dB	dB	dB
5500	-10.85	-10.69	--	--	-13.00	-2.15
5580	-11.13	-10.89	--	--		-1.87
5700	-10.45	-11.91	--	--		-1.09

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT A 5,500 MHz 802.11n HT-20 Peak Excursion Ratio

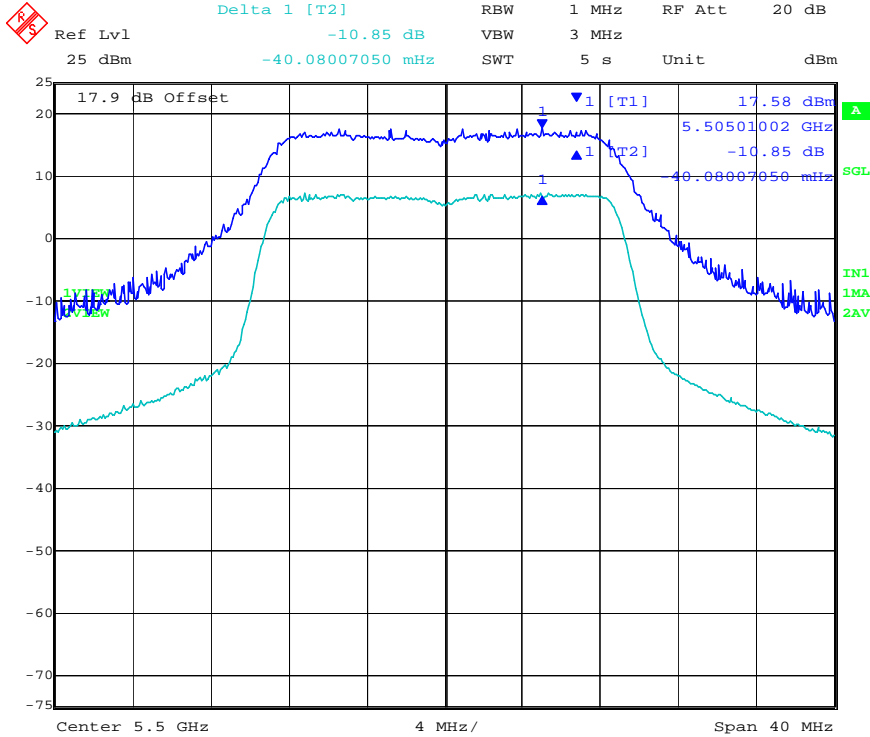

Date: 10.JAN.2012 19:39:27

PORT B 5,500 MHz 802.11n HT-20 Peak Excursion Ratio

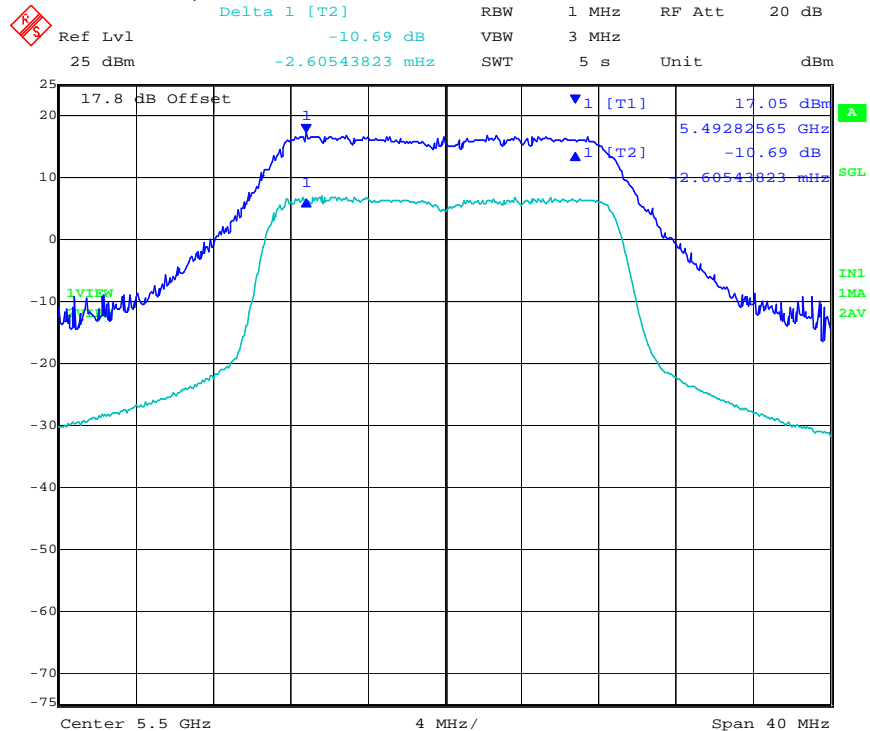


Date: 10.JAN.2012 19:40:05

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT A 5,580 MHz 802.11n HT-20 Peak Excursion Ratio

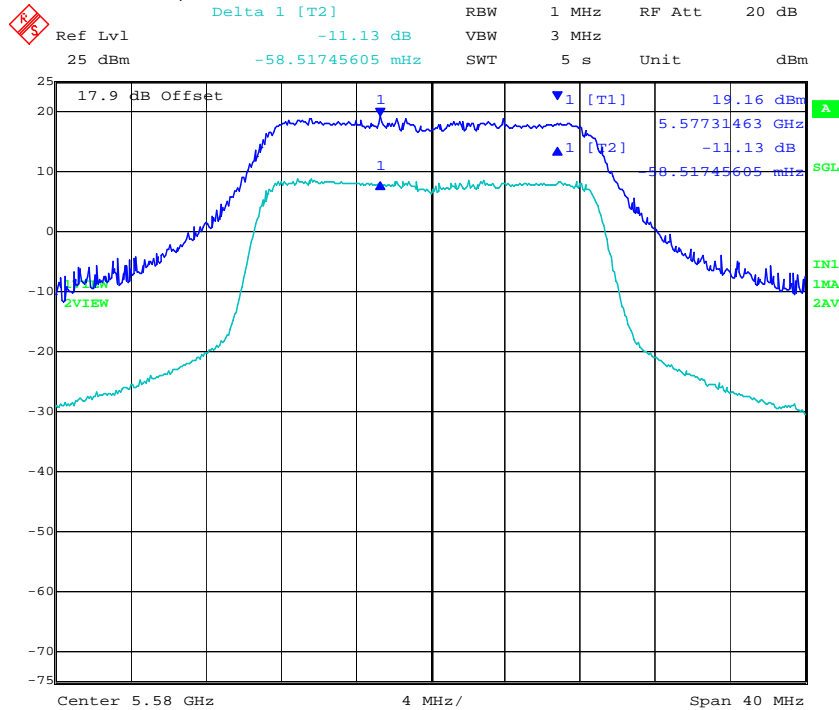

Date: 10.JAN.2012 19:46:16

PORT B 5,580 MHz 802.11n HT-20 Peak Excursion Ratio

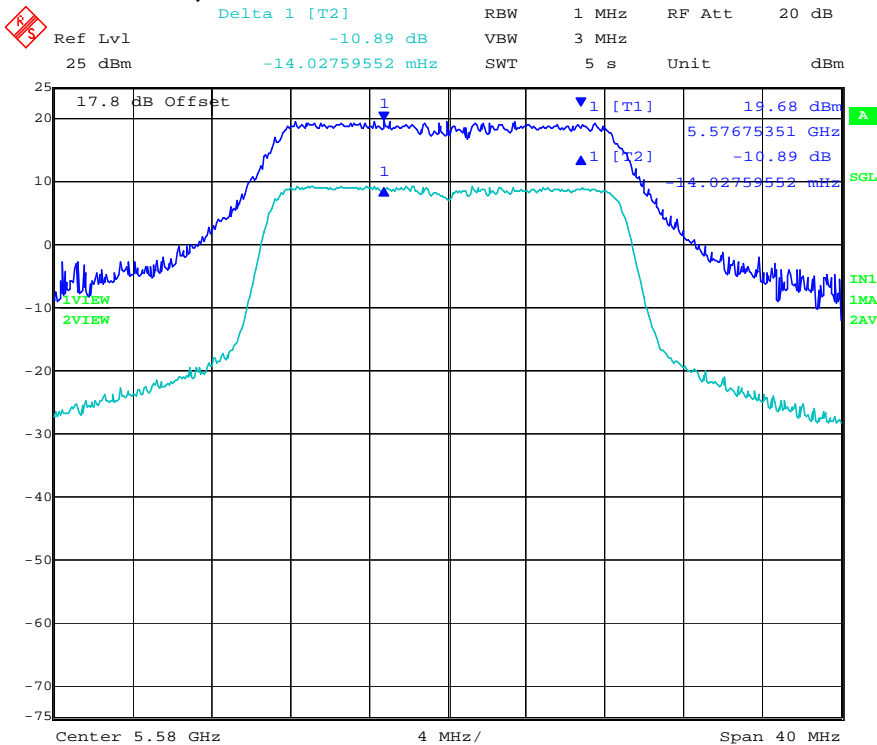


Date: 10.JAN.2012 19:46:55

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT A 5,700 MHz 802.11n HT-20 Peak Excursion Ratio

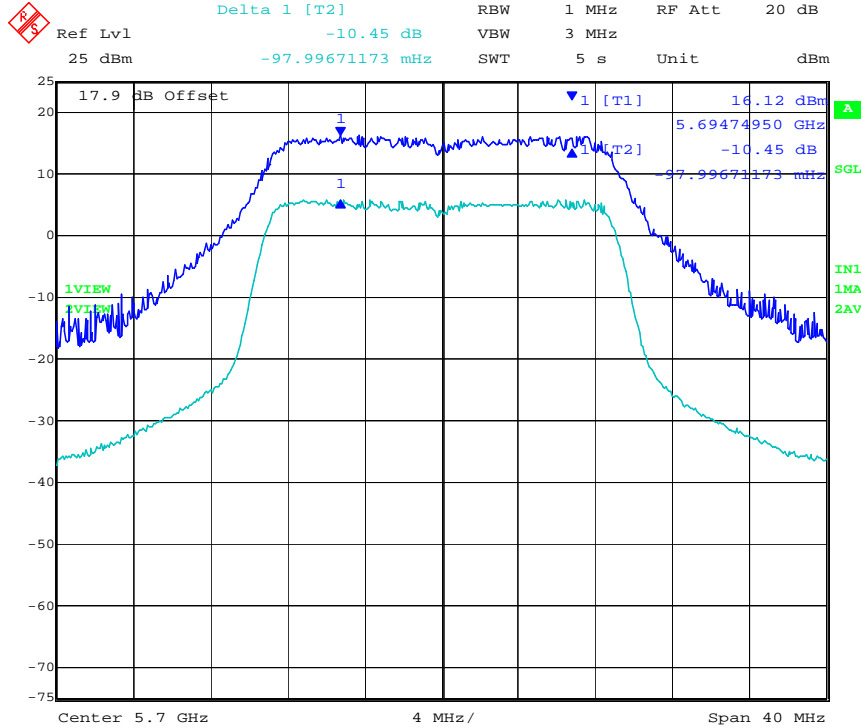

Date: 10.JAN.2012 19:53:17

PORT B 5,700 MHz 802.11n HT-20 Peak Excursion Ratio

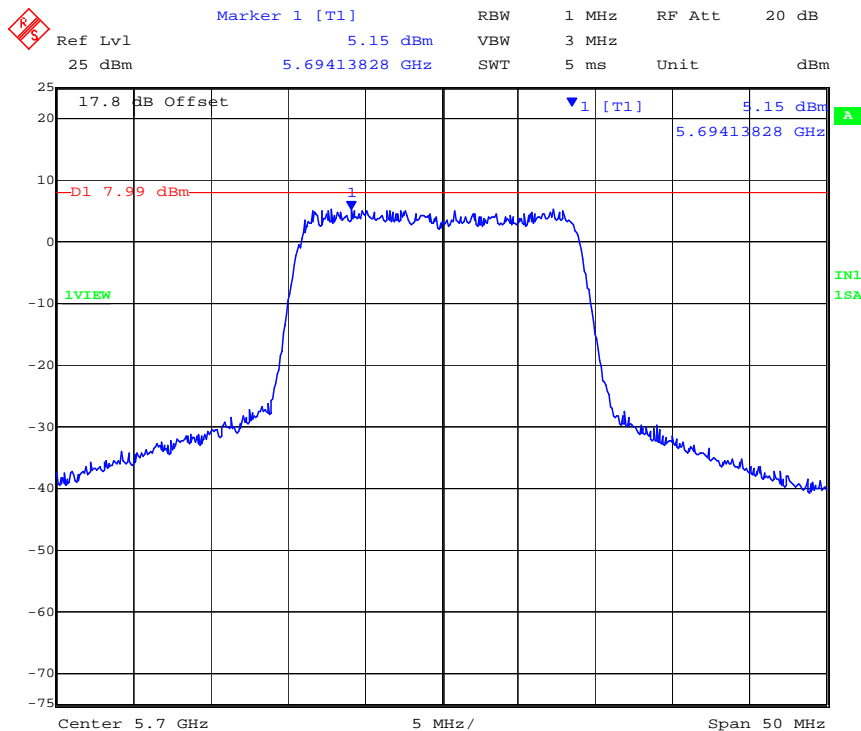

Date: 10.JAN.2012 19:52:15

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 101 of 186

TABLE OF RESULTS – 802.11n HT-40, 5470 – 5725 MHz

Test Conditions:	15.407 (a)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	6 dBi		
Applied Voltage:	12.0 Vdc				
Notes 1:					
Notes 2:					


Test Frequency	Trace Δ Marker				Limit	Margin
	Port A	Port B	Port C	Port D		
MHz	dB	dB	dB	dB	dB	dB
5510	-11.16	-11.38	--	--	-13.00	-1.62
5550	-11.09	-11.06	--	--		-1.91
5670	-12.41	-10.93	--	--		-0.59

Measurement uncertainty:	±1.33 dB
---------------------------------	----------


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,510 MHz 802.11n HT-40 Peak Excursion Ratio

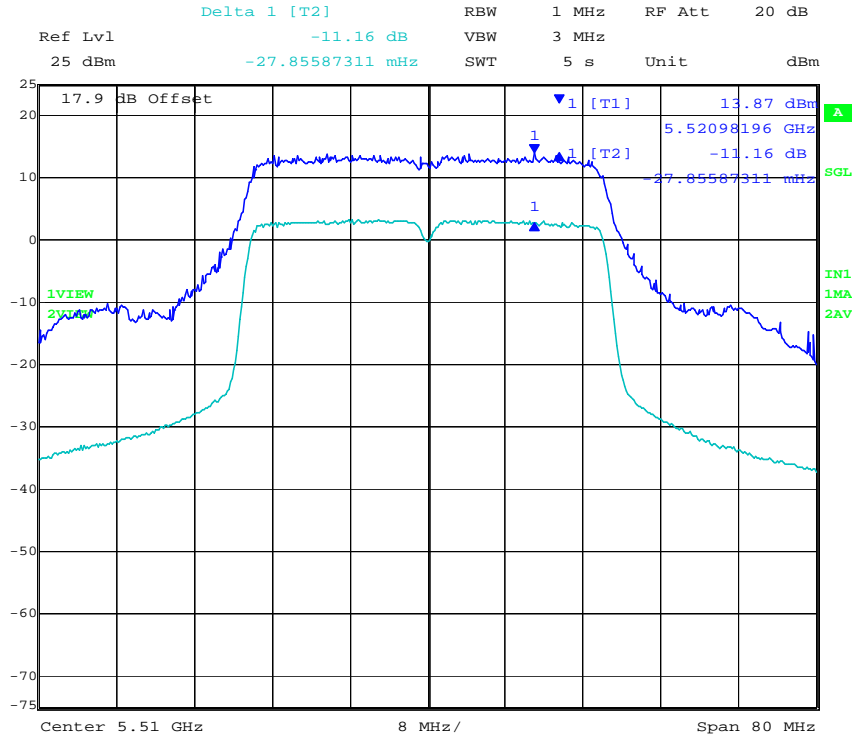


PORT B 5,510 MHz 802.11n HT-40 Peak Excursion Ratio

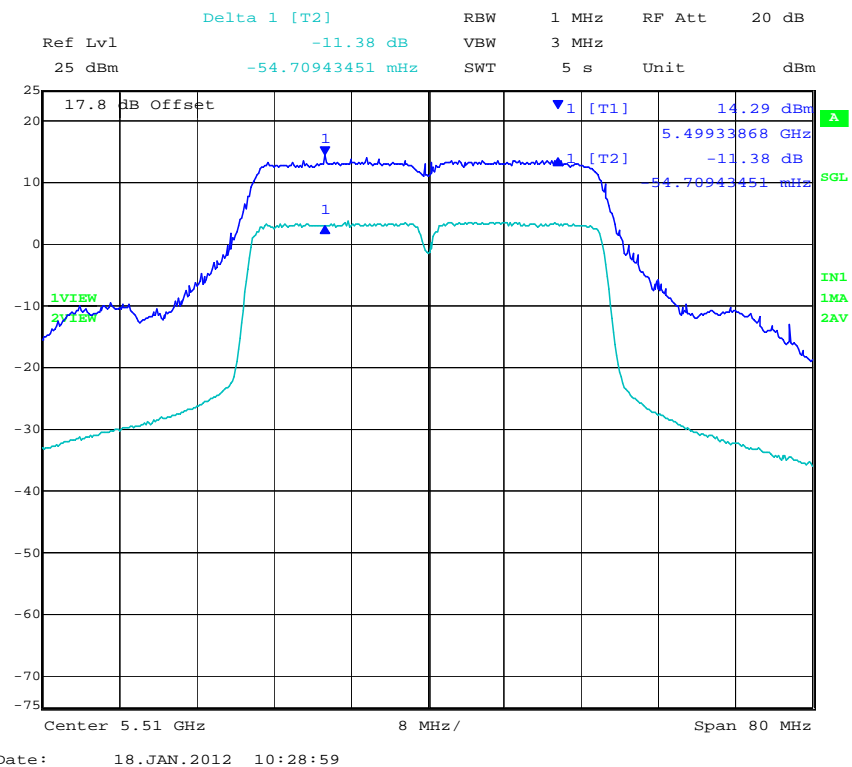

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT A 5,500 MHz 802.11n HT-40 Peak Excursion Ratio

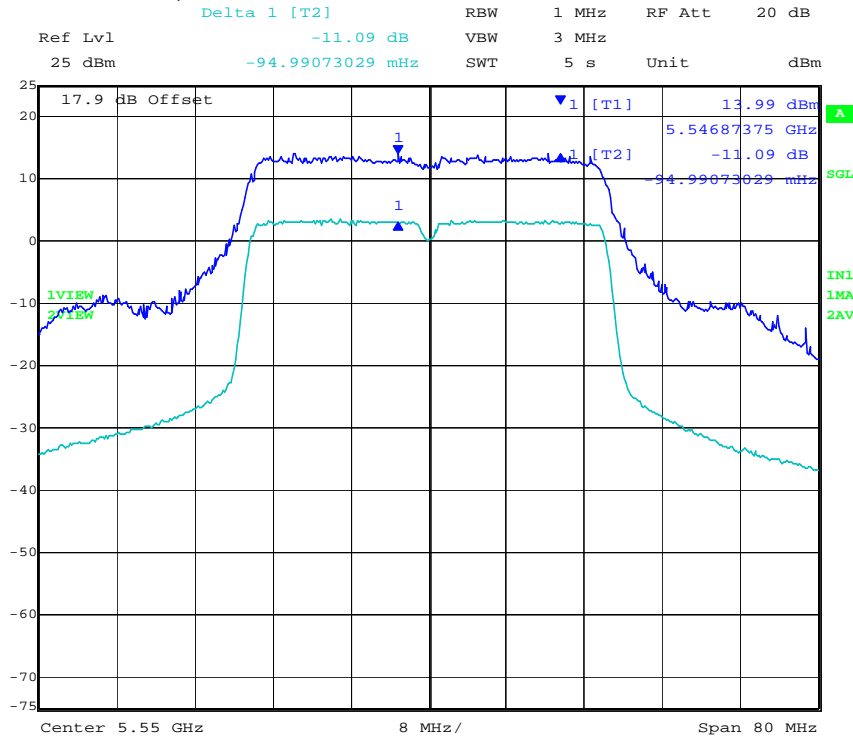

Date: 18.JAN.2012 12:02:29

PORT B 5,500 MHz 802.11n HT-40 Peak Excursion Ratio

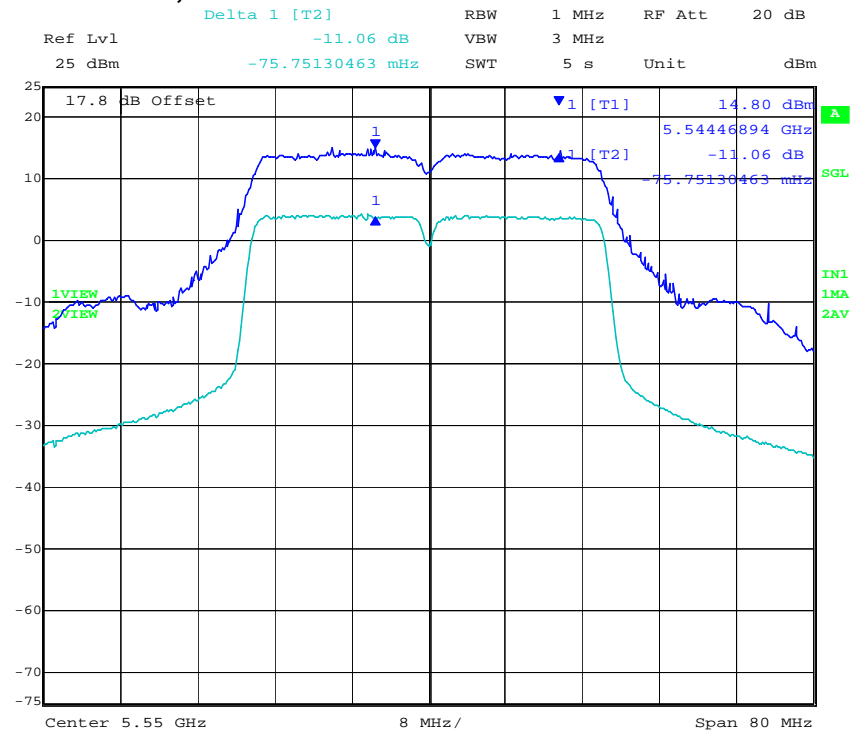


Date: 18.JAN.2012 12:03:06

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT A 5,670 MHz 802.11n HT-40 Peak Excursion Ratio

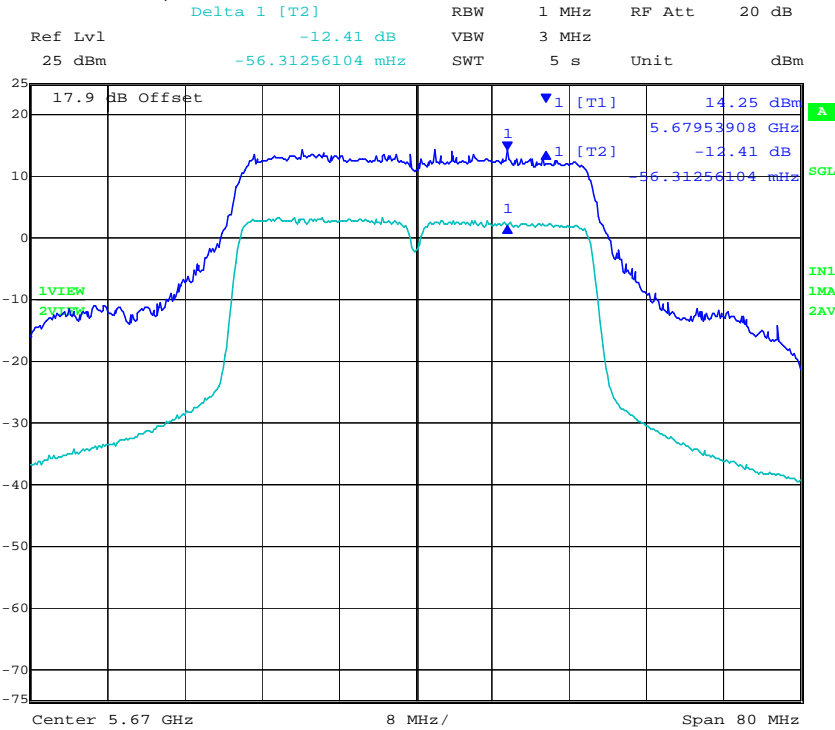

Date: 18.JAN.2012 12:10:37

PORT B 5,670 MHz 802.11n HT-40 Peak Excursion Ratio

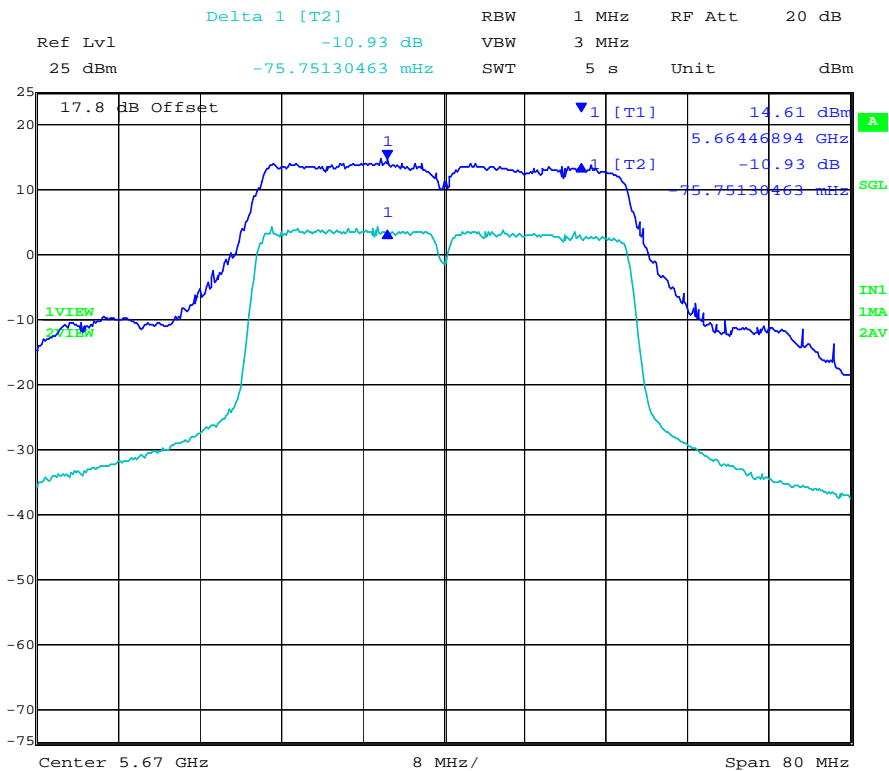

Date: 18.JAN.2012 12:11:15

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 105 of 186

Specification

Limits

§15.407 (a)(6) The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified in this paragraph) shall not exceed 13dB across any 1MHz bandwidth or the emission bandwidth whichever is less

Laboratory Measurement Uncertainty for Spectrum Measurement

Measurement uncertainty	$\pm 2.81\text{dB}$
-------------------------	---------------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of RF Spectrum Mask'	0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 106 of 186

5.1.5. Frequency Stability

FCC, Part 15 Subpart C §15.407(g)
Industry Canada RSS-210 §2.1

Test Procedure

The manufacturer of the equipment is responsible for ensuring that the frequency stability is such that emissions are always maintained within the band of operation under all conditions.

Manufacturer Declaration

The frequency stability of the reference oscillator sets the frequency stability of the RF transceiver signals. Therefore all of the RF signals should have ± 20 ppm stability.

This stability accounts for room temp tolerance of the crystal oscillator circuit, frequency variation across temperature, and crystal ageing.

± 20 ppm at 5.250 GHz translates to a maximum frequency shift of ± 105 KHz. As the edge of the channels is at least one MHz from either of the band edges, ± 105 KHz is more than sufficient to guarantee that the intentional emission will remain in the band over the entire operating range of the EUT.

Specification

Limits

§15.407 (g) Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5.1.6. Maximum Permissible Exposure

FCC, Part 15 Subpart C §15.407(f)
Industry Canada RSS-Gen §5.5

Calculations for Maximum Permissible Exposure Levels

Power Density = Pd (mW/cm²) = EIRP/(4πd²)

EIRP = P * G * 3

P = Peak output power (mW)

G = Antenna numeric gain (numeric)

d = Separation distance (cm)

Numeric Gain = 10 ^ (G (dBi)/10)

The Aruba AP-104 has two transmitters. The peak power in the table below is calculated by assuming a worst case scenario where the two transmitters are operating simultaneously in the same band. The Peak Power in mW is calculated by taking the maximum conducted power measured.

Because the EUT belongs to the General Population/Uncontrolled Exposure the limit of power density is 1.0 mW/cm²

Freq. Band (MHz)	Antenna Gain (dBi)	Numeric Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Calculated safe distance @ 1mW/cm ² Limit(cm)	Minimum Separation Distance (cm)
5250 – 5350	7.5	5.62	+20.60	114.8	7.2	20*
5470 – 5725	7.5	5.62	+22.50	177.8	9.0	20*

***Note:** for mobile or fixed location transmitters the minimum separation distance is 20cm, even if calculations indicate the MPE distance to be less.

Specification
Maximum Permissible Exposure Limits

FCC §1.1310 Limit = 1mW / cm² from 1.310 Table 1

RSS-Gen §5.5 Before equipment certification is granted, the application requirements of RSS-102 shall be met.

Laboratory Measurement Uncertainty for Power Measurements

Measurement uncertainty	±1.33 dB
-------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.7. Radiated Emissions

5.1.7.1. Transmitter Radiated Spurious Emissions (above 1 GHz); Peak Field Strength Measurements; and Radiated Band Edge Measurements – Restricted Bands


FCC, Part 15 Subpart C §15.407(b)(2), §15.205(a)/15.209(a)
Industry Canada RSS-210 §A9.3(2); §2.2; §2.6; RSS-Gen §4.7

Test Procedure

Radiated emissions above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

All measurements on any frequency or frequencies over 1 MHz are based on the use of measurement instrumentation employing an average detector function. All measurements above 1 GHz were performed using a minimum resolution bandwidth of 1 MHz.

Test Measurement Set up

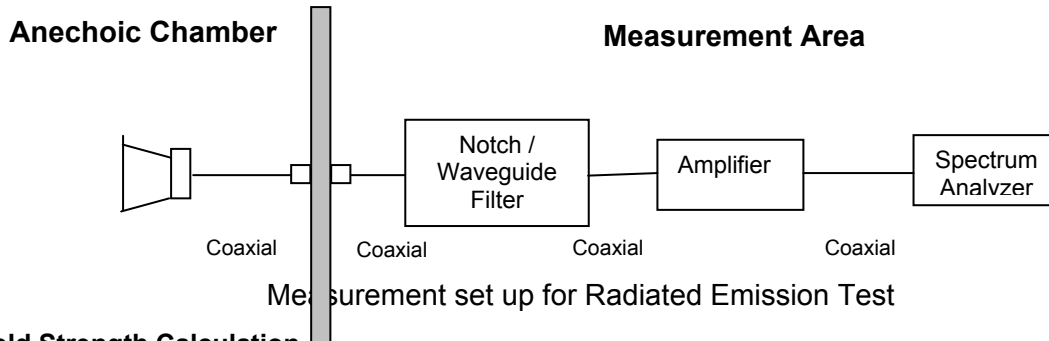

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where: FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 109 of 186

For example:

Given receiver input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu\text{V/m}))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength (dB μ V/m@3m);

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

$$\text{Therefore: } -27 \text{ dBm/MHz} = 68.23 \text{ dB}\mu\text{V/m}$$

Note: The data in this Section identifies that the EUT is in compliance with the -27dBm/MHz EIRP limit (68.23 dB μ V/m@ 3m) for out of band emissions. All peak emissions are less than 68.23 dB μ V/m.

Measurement Results Transmitter Radiated Spurious Emissions above 1 GHz

Ambient conditions.

Temperature: 17 to 23°C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 110 of 186

AP-ANT-18

802.11a – 5.25-5.35 GHz Band

Date	Wednesday, March 14, 2012	Tracker #	ARUB100
Lab. Notes			
Lab. Notes			

Test Freq.	5260 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	18.5	Press. (mBars)	1003
Antenna	Ant 18	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

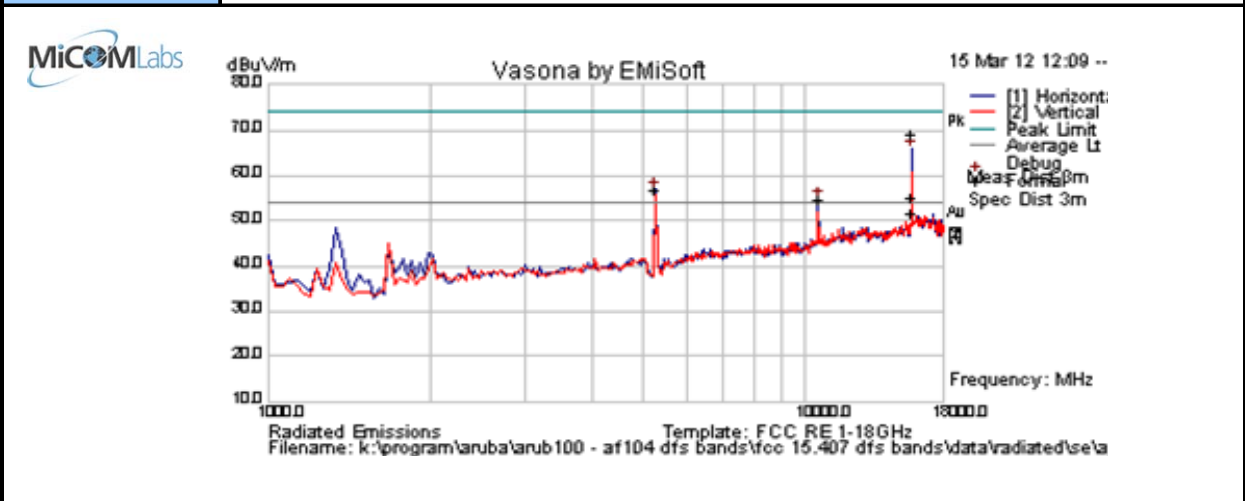

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
15780.025	60.9	8.7	-0.3	69.3	Peak Max	H	159	236	74.0	-4.7	Pass	RB
15780.025	43.4	8.7	-0.3	51.8	Average Max	H	159	236	54	-2.2	Pass	RB
5258.517	62.1	4.6	-9.7	56.9	Peak [Scan]	H						FUND
10539.078	50.1	6.8	-2.5	54.5	Peak [Scan]	H						NRB


Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
	NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 111 of 186

Test Freq.	5300 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	16.0	Press. (mBars)	1003
Antenna	Ant 18	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

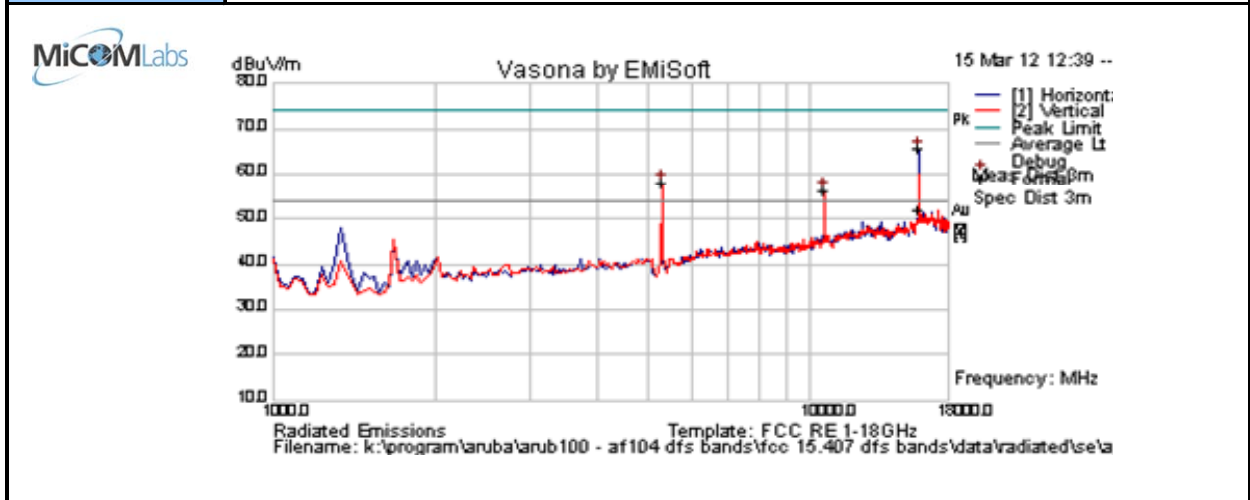

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
15900.050	57.3	8.9	-0.2	66.0	Peak Max	H	155	237	74.0	-8.0	Pass	RB
15900.05	43.4	8.9	-0.2	52.1	Average Max	H	155	237	54.0	-1.9	Pass	RB
5292.585	63.0	4.6	-9.6	58.0	Peak [Scan]	V						FUND
10599.859	51.8	6.8	-2.4	56.2	Peak [Scan]	V						NRB


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 112 of 186

Test Freq.	5320 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	16.0	Press. (mBars)	1003
Antenna	Ant 18	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

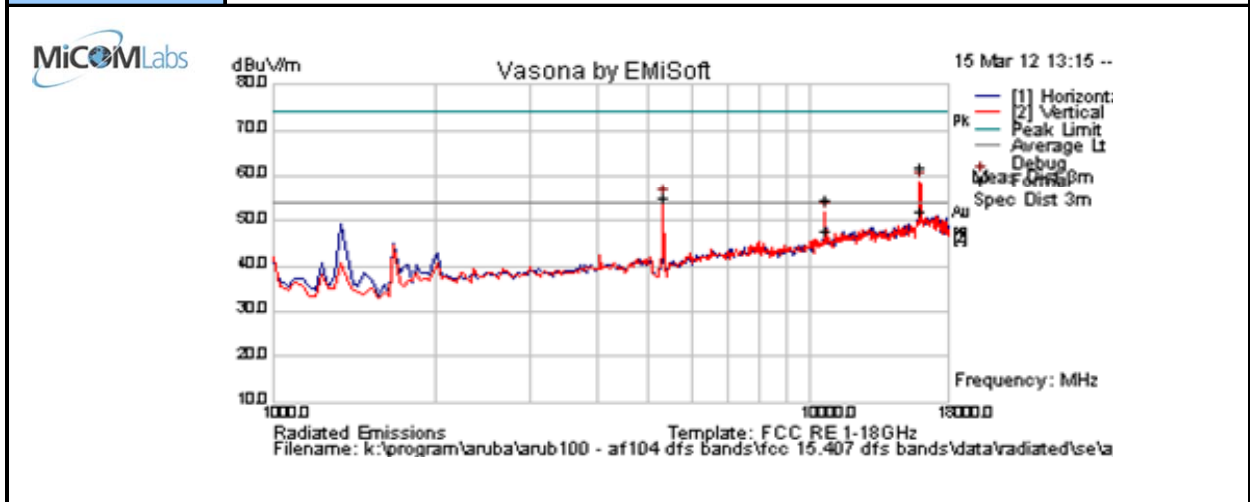

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
15959.940	52.9	9.0	0.0	61.9	Peak Max	H	123	247	74.0	-12.1	Pass	RB
10639.94	50.2	6.8	-2.4	54.6	Peak Max	V	98	222	74.0	-19.4	Pass	RB
15959.940	43.3	9.0	0.0	52.2	Average Max	H	123	247	54	-1.8	Pass	RB
10639.940	43.2	6.8	-2.4	47.7	Average Max	V	98	222	54	-6.3	Pass	RB
5326.653	60.1	4.6	-9.5	55.2	Peak [Scan]	V						FUND

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Restricted Bands of Operation – FCC Part 15.205 – 5.35-5.46 GHz

Band Edge Measurement

AP-ANT-18, ART=20 802.11a

	Ref Lvl	100.7 dBV	Marker 1 [T1]	69.90 dBV	RBW	1 MHz	RF Att	20 dB
				5.35066132 GHz	VBW	1 MHz		
					SWT	60 s	Unit	dBV

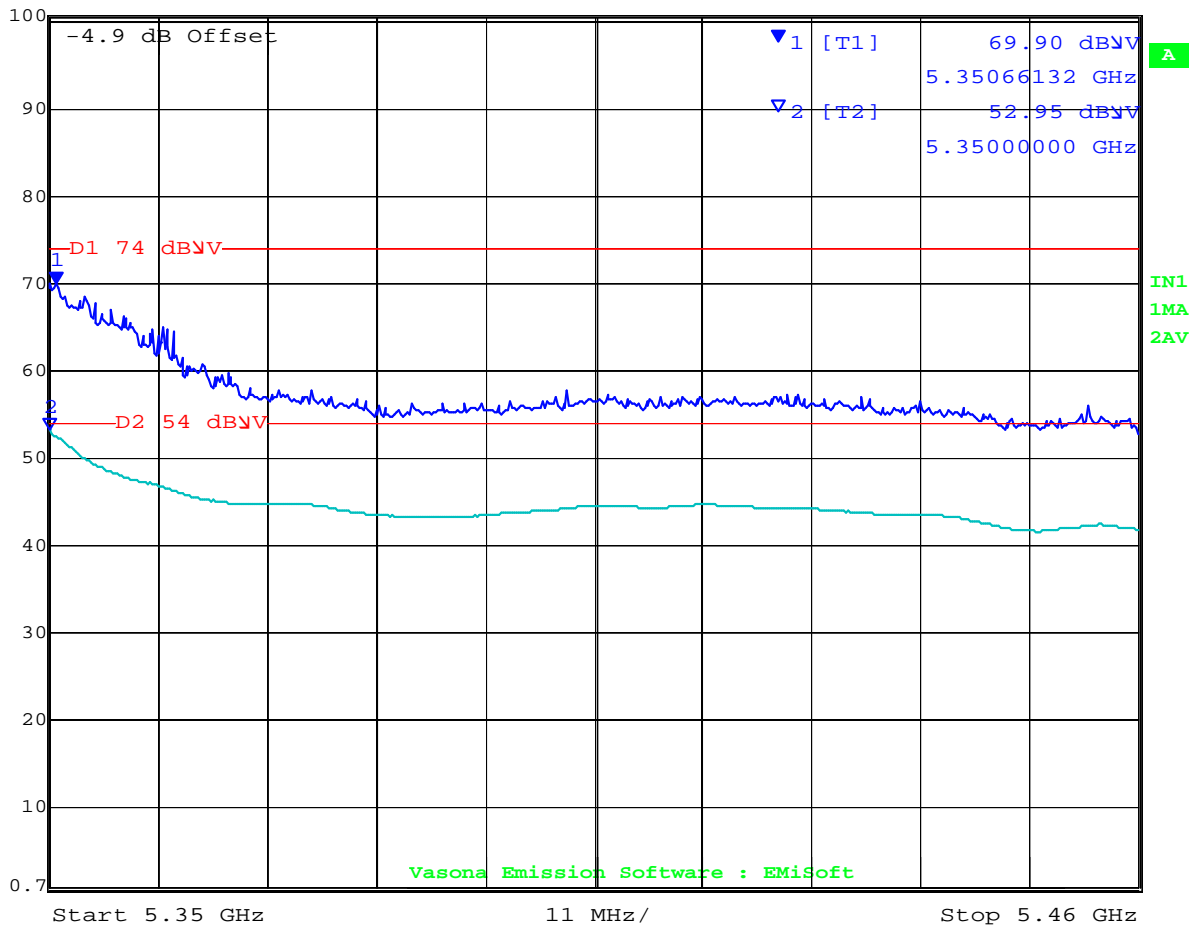

Date: 8.JAN.2012 12:36:52

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 114 of 186

AP-ANT-18

**802.11n HT-20
 5.25-5.35 GHz Band**

Date	Wednesday, March 14, 2012	Tracker #	ARUB100
Lab. Notes			
Lab. Notes			

Test Freq.	5260 MHz	Engineer	SB
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	17.5	Press. (mBars)	1003
Antenna	Ant 18	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

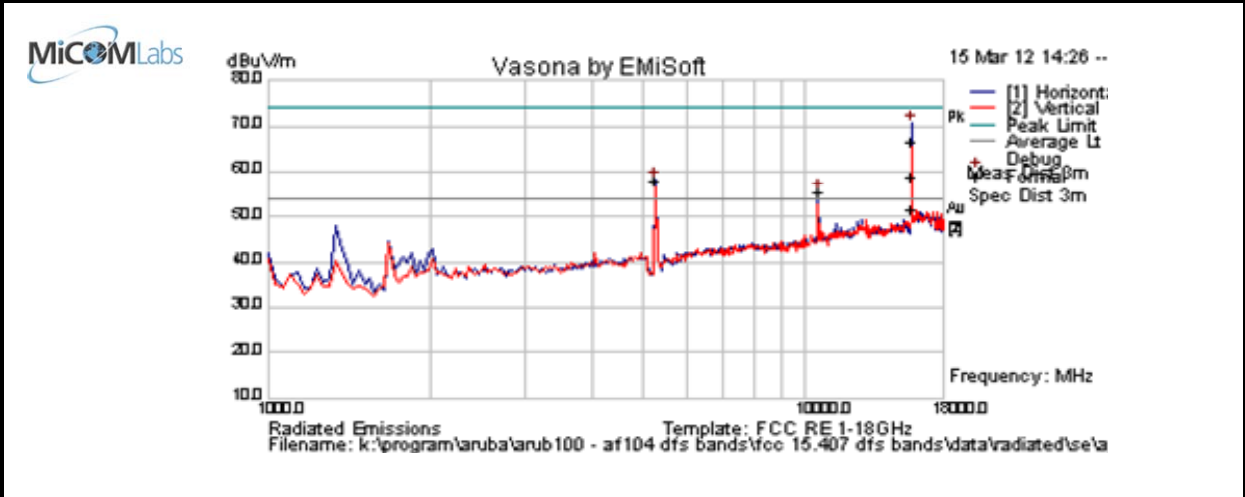

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
15779.840	58.3	8.7	-0.3	66.7	Peak Max	H	156	236	74.0	-7.3	Pass	RB
15779.840	43.4	8.7	-0.3	51.7	Average Max	H	156	236	54	-2.3	Pass	RB
5258.517	63.3	4.6	-9.7	58.2	Peak [Scan]	H						FUND
10539.078	51.1	6.8	-2.5	55.5	Peak [Scan]	H						NRB


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 115 of 186

Test Freq.	5300 MHz	Engineer	SB
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	16.0	Press. (mBars)	1003
Antenna	Ant 18	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

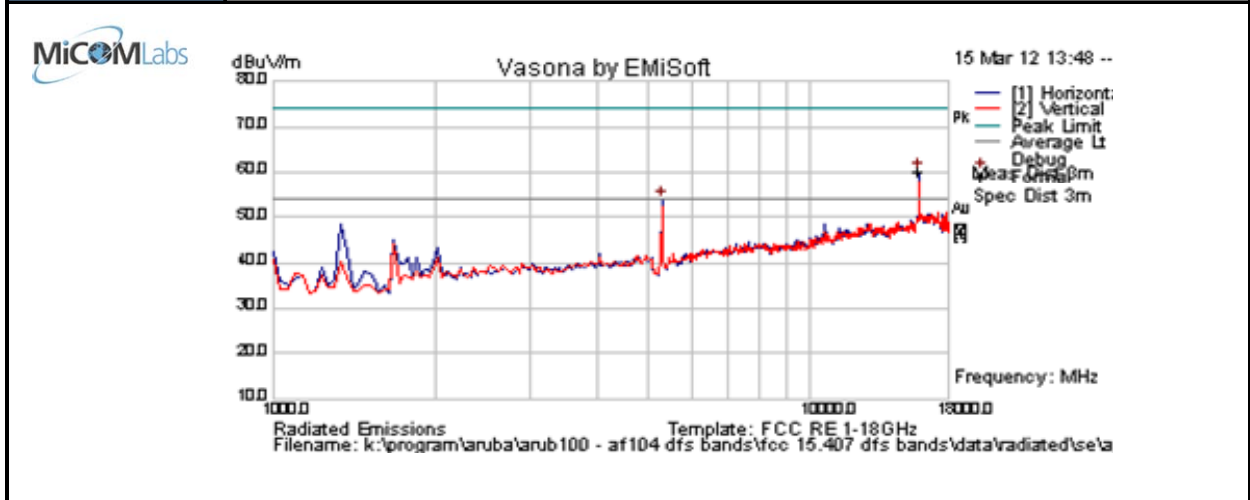

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
15900.050	57.3	8.9	-0.2	66.0	Peak Max	H	155	237	74.0	-8.0	Pass	RB
15900.05	43.4	8.9	-0.2	52.1	Average Max	H	155	237	54.0	-1.9	Pass	RB
5292.585	58.8	4.6	-9.6	53.8	Peak [Scan]	H						FUND


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 116 of 186

Test Freq.	5320 MHz	Engineer	SB
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	16.0	Press. (mBars)	1003
Antenna	Ant 18	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

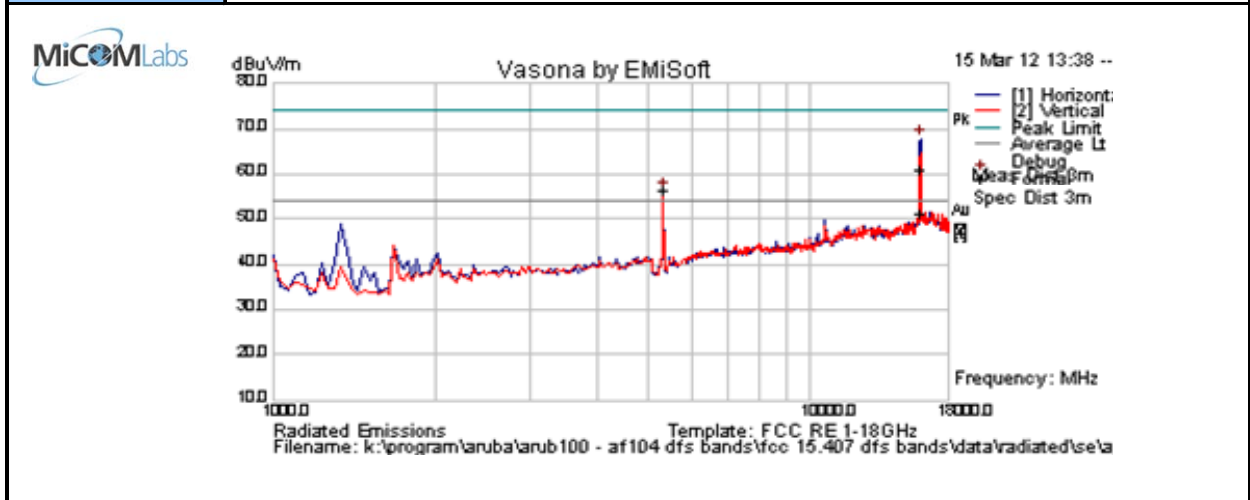

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
15959.94	51.9	9.0	0.0	60.9	Peak Max	H	160	282	74.0	-13.1	Pass	RB
15959.940	42.2	9.0	0.0	51.2	Average Max	H	160	282	54.0	-2.8	Pass	RB
5326.653	61.4	4.6	-9.5	56.5	Peak [Scan]	H						FUND

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Restricted Bands of Operation – FCC Part 15.205 – 5.35-5.46 GHz

Band Edge Measurement

AP-ANT-18, ART=19
802.11n HT-20

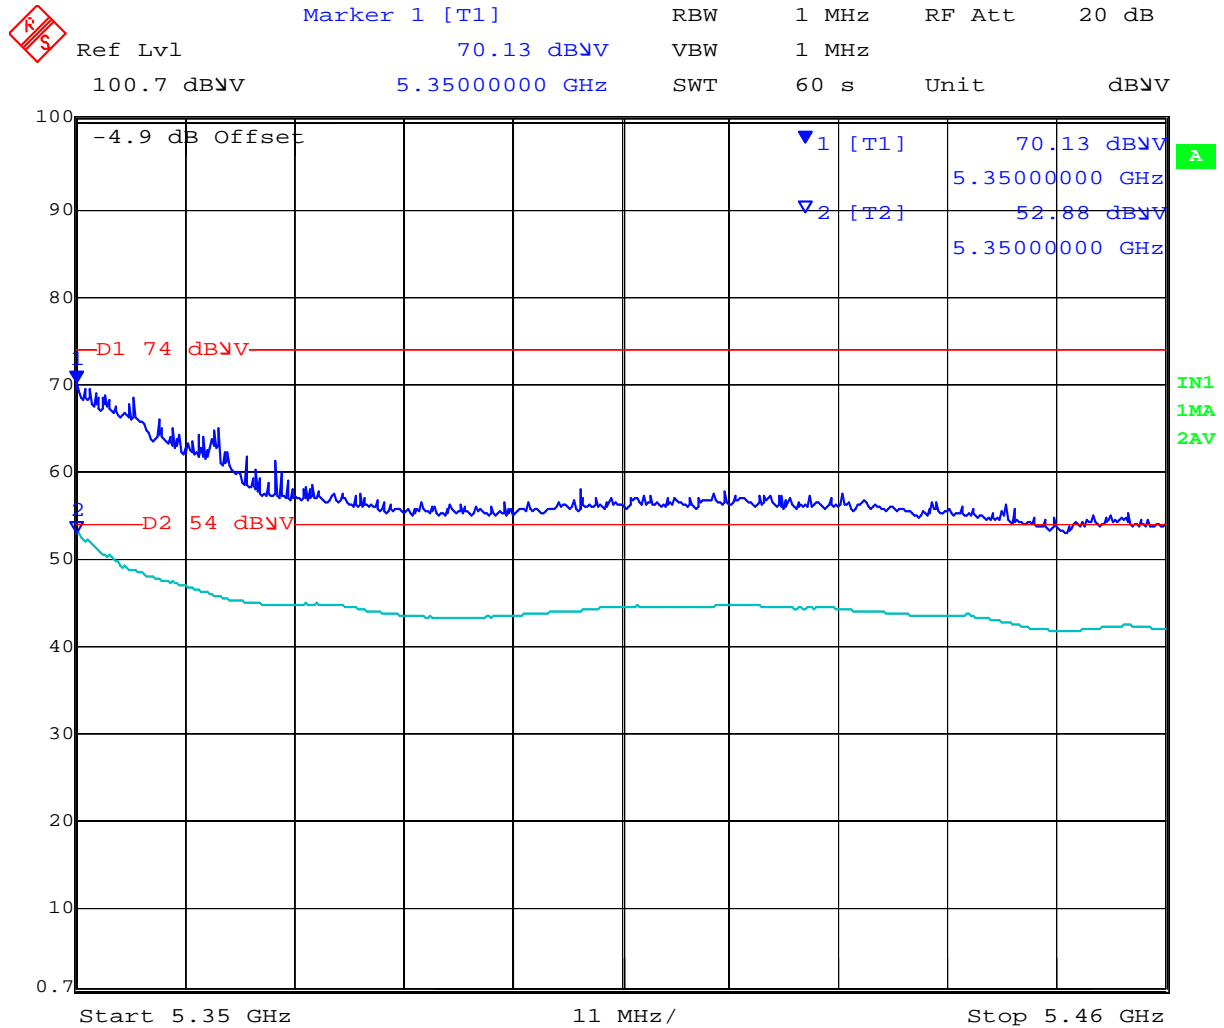

Date: 8.JAN.2012 12:40:11

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 118 of 186

AP-ANT-18

802.11n HT-40
5.25-5.35 GHz Band

Date	Wednesday, March 14, 2012	Tracker #	ARUB100
Lab. Notes			
Lab. Notes			

Test Freq.	5270 MHz	Engineer	SB
Variant	802.11n HT-40; 13.5 MCS	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	17.5	Press. (mBars)	1003
Antenna	Ant 18	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

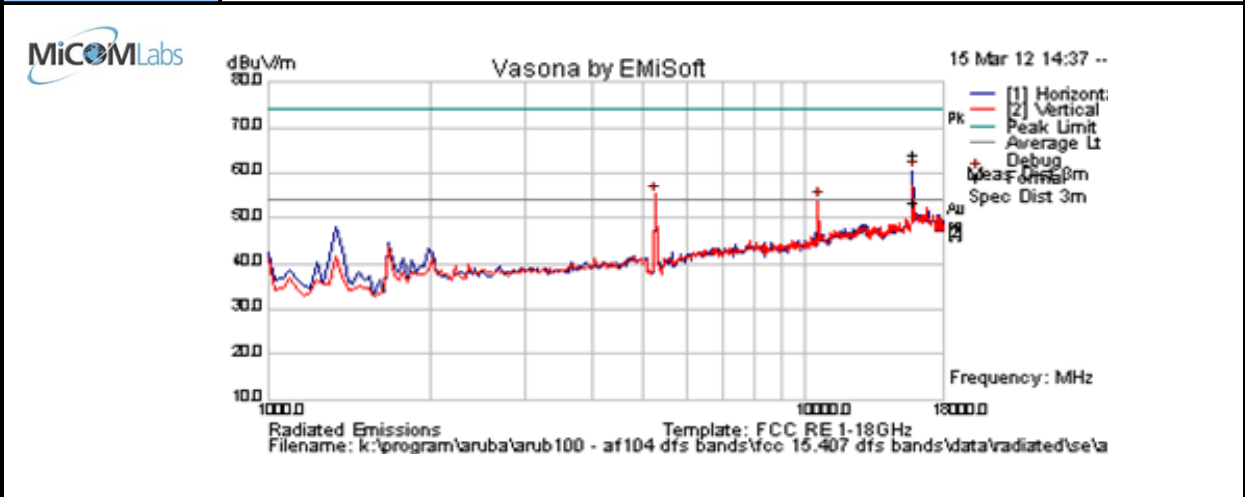

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
15809.925	55.7	8.7	-0.3	64.2	Peak Max	H	156	234	74.0	-9.8	Pass	
15809.925	45.0	8.7	-0.3	53.4	Average Max	H	156	234	54.0	-0.6	Pass	
5258.517	60.2	4.6	-9.7	55.1	Peak [Scan]	V						FUND
10539.078	49.3	6.8	-2.5	53.7	Peak [Scan]	V						NRB


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 119 of 186

Test Freq.	5310 MHz	Engineer	SB
Variant	802.11n HT-40; 13.5 MCS	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	17.5	Press. (mBars)	1003
Antenna	Ant 18	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

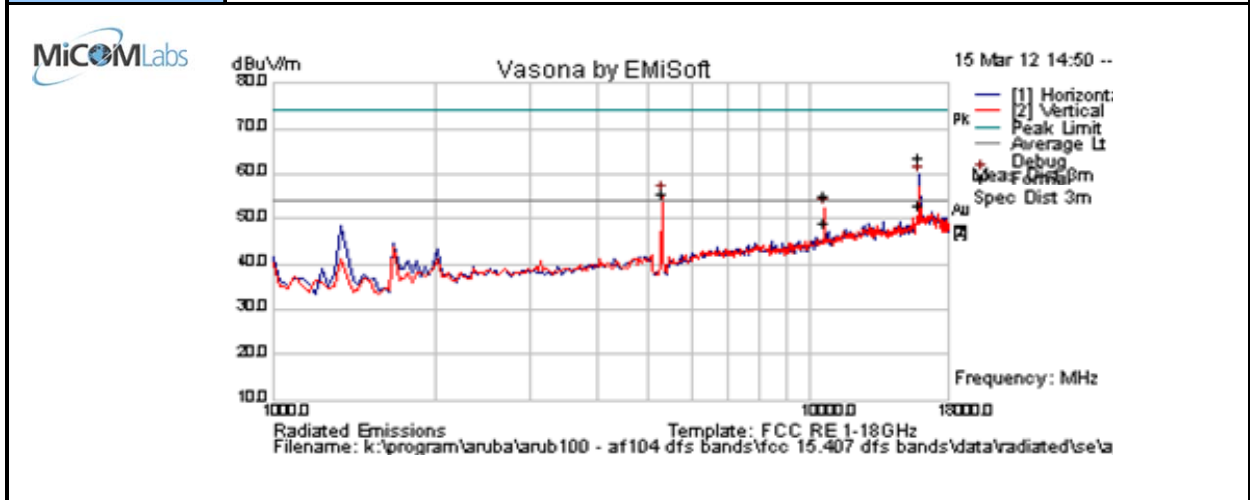

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
15929.910	54.6	8.9	-0.1	63.4	Peak Max	H	123	244	74.0	-10.6	Pass	RB
10619.909	50.7	6.8	-2.4	55.1	Peak Max	V	98	219	74.0	-18.9	Pass	RB
15929.910	44.2	8.9	-0.1	53.0	Average	H	123	244	54	-1.0	Pass	RB
10619.909	44.8	6.8	-2.4	49.2	Average Max	V	98	219	54	-4.9	Pass	RB
5292.585	60.3	4.6	-9.6	55.3	Peak [Scan]	V						FUND

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Restricted Bands of Operation – FCC Part 15.205 – 5.35-5.46 GHz

Band Edge Measurement

**AP-ANT-18, ART=16
802.11n HT-40**

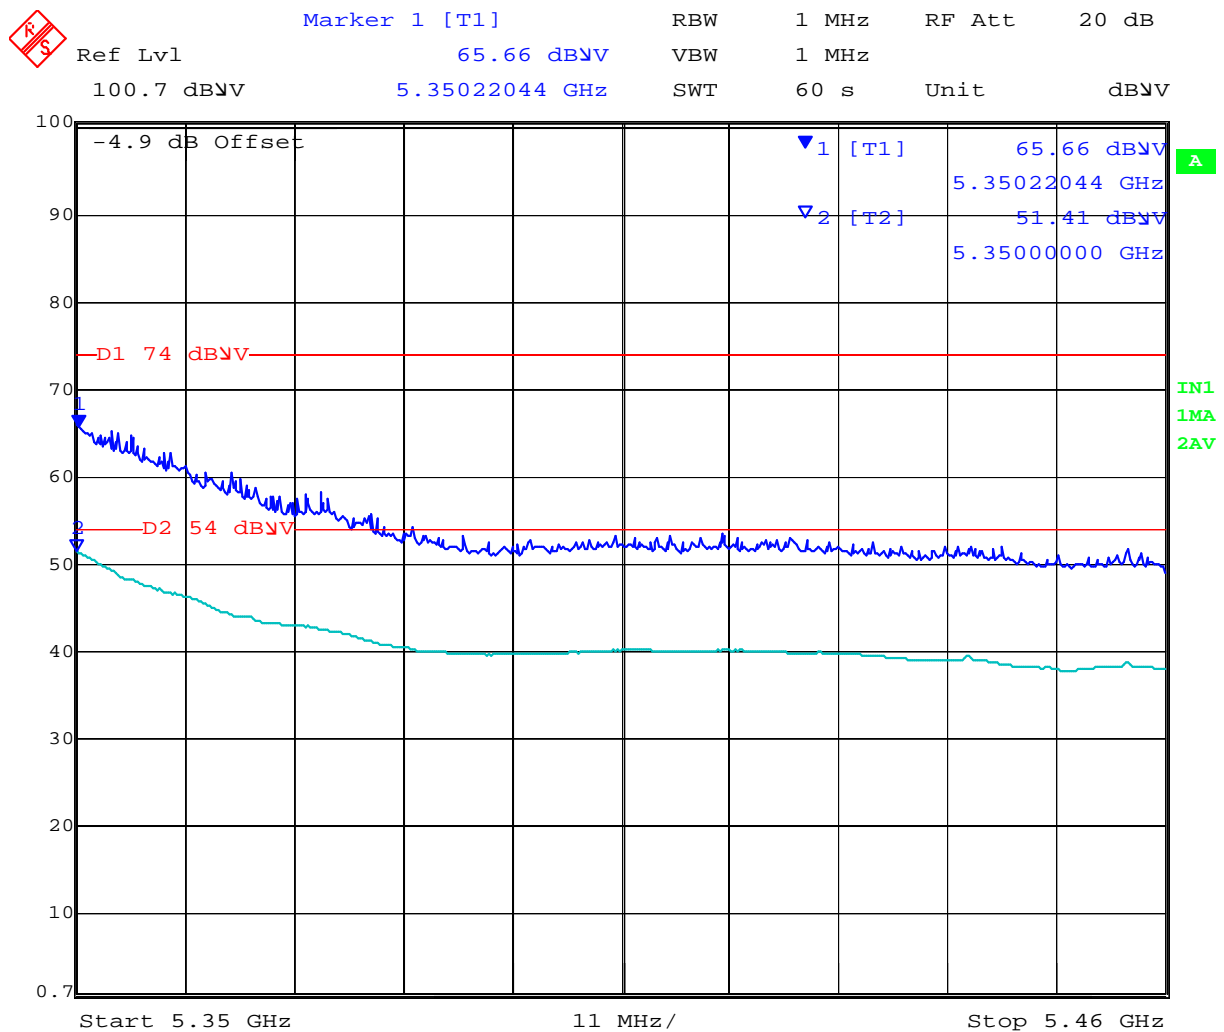

Date: 8.JAN.2012 12:43:48

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 121 of 186

AP-ANT-18

**802.11a
 5.470-5.725 GHz Band**

Date	Wednesday, March 14, 2012	Tracker #	ARUB100
Lab. Notes			
Lab. Notes			

Test Freq.	5500 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	16.5	Press. (mBars)	1003
Antenna	Ant 18	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

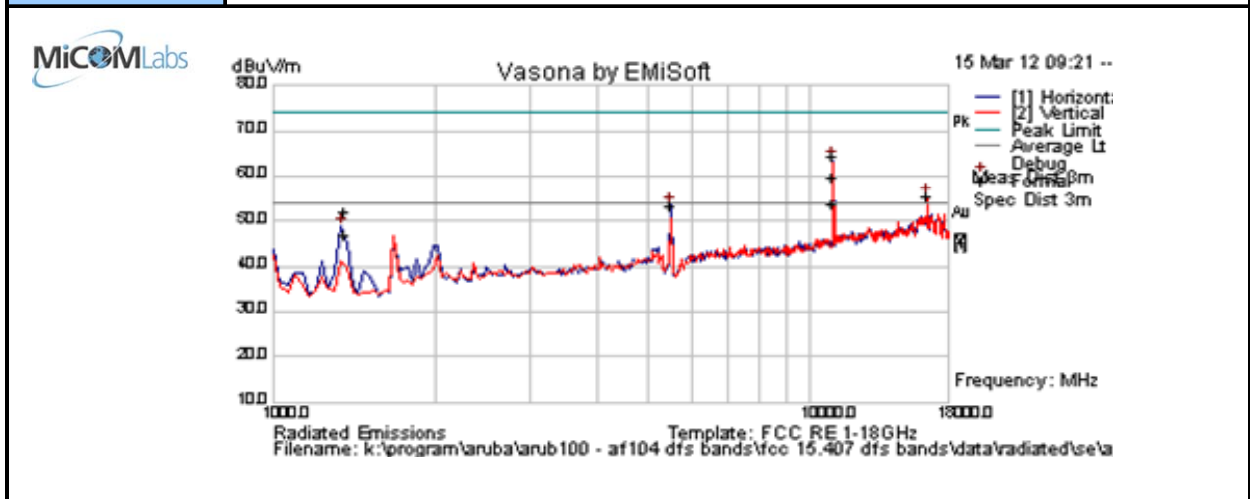

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
10999.975	60.6	7.0	-3.1	64.5	Peak Max	H	100	235	74.0	-9.5	Pass	RB
1360.13	63.9	2.3	-14.0	52.1	Peak Max	H	100	326	74.0	-21.9	Pass	RB
10999.975	50.0	7.0	-3.1	53.9	Average Max	H	100	236	54	-0.1	Pass	RB
1360.130	58.5	2.3	-14.0	46.7	Average Max	H	100	326	54	-7.3	Pass	RB
16501.002	46.3	8.8	0.3	55.5	Peak [Scan]	V						NRB
5496.994	58.4	4.6	-9.6	53.4	Peak [Scan]	H						FUND

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




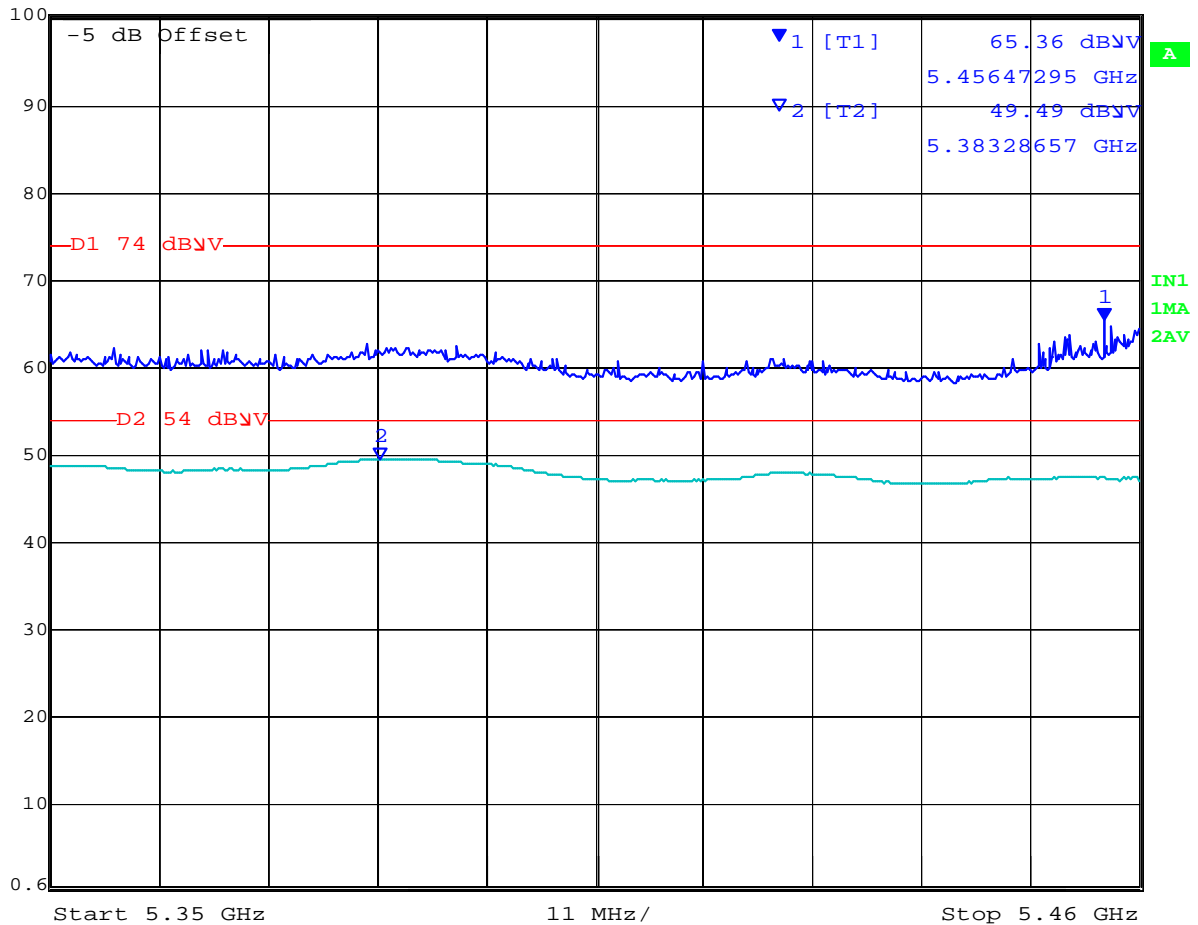
Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 122 of 186

Restricted Bands of Operation – FCC Part 15.205 – 5.35-5.46 GHz

Band Edge Measurement

AP-ANT-18, ART=20 802.11a

 Marker 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 100.6 dBμV 65.36 dBμV VBW 1 MHz
100.6 dBμV 5.45647295 GHz SWT 60 s Unit dBμV




Date: 8.JAN.2012 15:24:11

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 123 of 186

Test Freq.	5580 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	16.5	Press. (mBars)	1003
Antenna	Ant 18	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

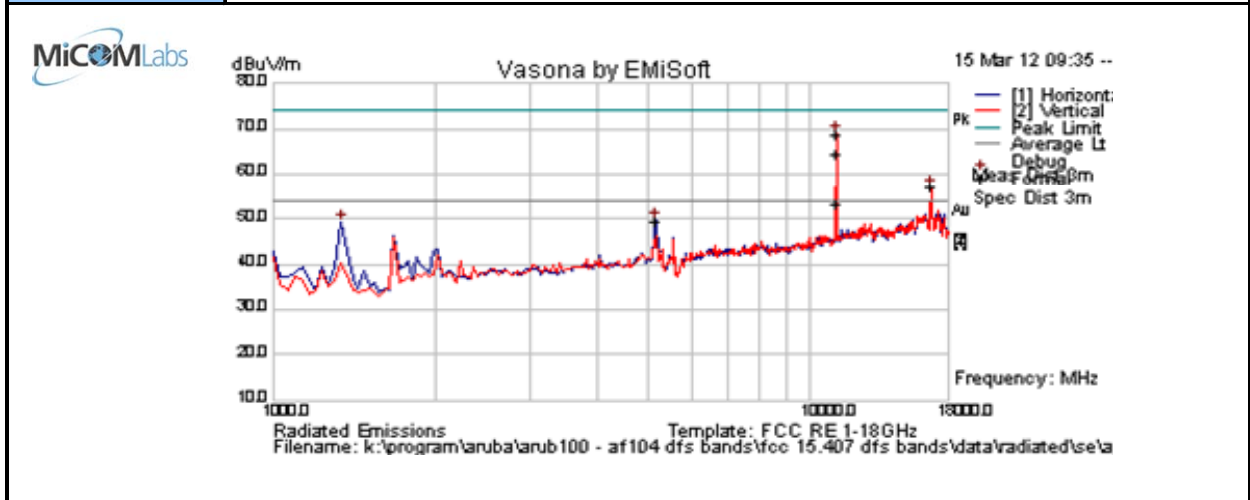

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11159.865	64.9	6.9	-3.0	68.9	Peak Max	V	105	221	74.0	-5.1	Pass	RB
1360.13	63.9	2.3	-14.0	52.1	Peak Max	H	100	326	74.0	-21.9	Pass	RB
11159.865	49.6	6.9	-3.0	53.5	Average Max	V	105	221	54	-0.5	Pass	RB
1360.130	58.5	2.3	-14.0	46.7	Average Max	H	100	326	54	-7.3	Pass	RB
16739.479	47.5	8.7	0.9	57.0	Peak [Scan]	V						NRB
5156.313	54.9	4.6	-9.9	49.6	Peak [Scan]	H						NRB


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 124 of 186

Test Freq.	5700 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	18.5	Press. (mBars)	1003
Antenna	Ant 18	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

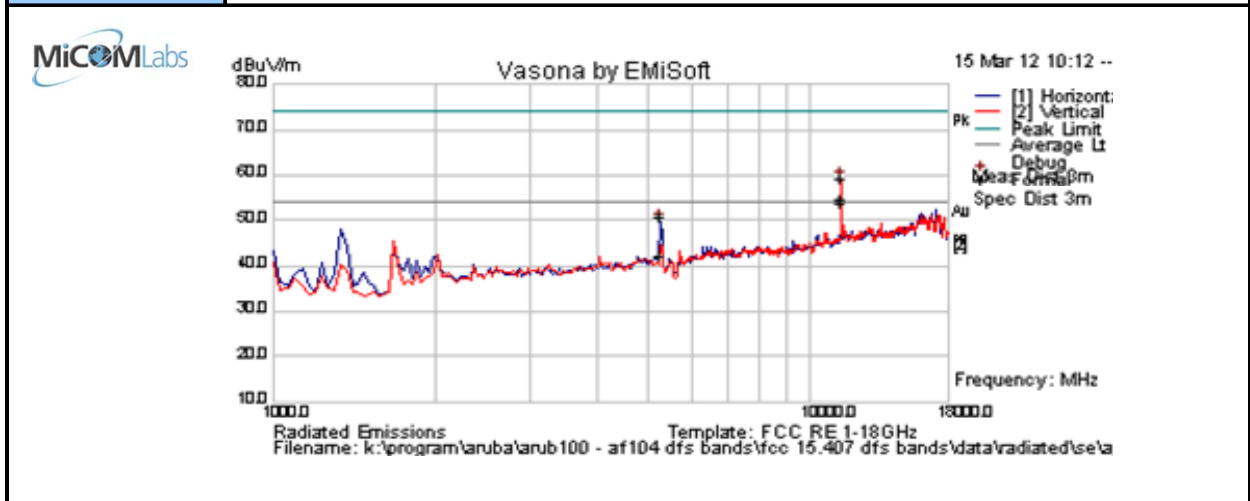

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11399.918	54.7	6.8	-2.3	59.3	Peak Max	V	125	227	74.0	-14.7	Pass	RB
5259.98	56.1	4.6	-9.7	51.0	Peak Max	H	163	202	74.0	-23.0	Pass	RB
11399.918	49.3	6.8	-2.3	53.9	Average Max	H	125	227	54	-0.1	Pass	RB
5259.980	47.4	4.6	-9.7	42.3	Average Max	H	163	202	54	-11.8	Pass	RB

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 125 of 186

AP-ANT-18

802.11n HT-20
5.470-5.725 GHz Band

Date	Wednesday, March 14, 2012	Tracker #	ARUB100
Lab. Notes			
Lab. Notes			

Test Freq.	5500 MHz	Engineer	SB
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	16.0	Press. (mBars)	1003
Antenna	Ant 18	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

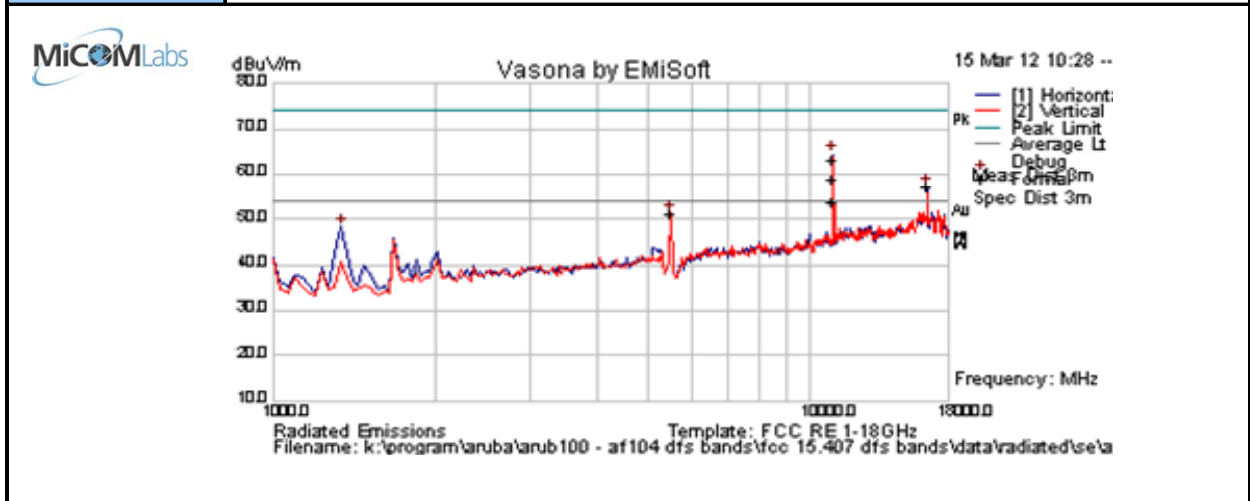

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
10999.895	59.1	7.0	-3.1	63.0	Peak Max	H	98	240	74.0	-11.0	Pass	RB
1360.13	63.9	2.3	-14.0	52.1	Peak Max	H	100	326	74.0	-21.9	Pass	RB
10999.895	49.8	7.0	-3.1	53.7	Average Max	H	98	240	54	-0.3	Pass	RB
1360.130	58.5	2.3	-14.0	46.7	Average Max	H	100	326	54	-7.3	Pass	RB
16501.002	48.0	8.8	0.3	57.1	Peak [Scan]	H						NRB
5496.994	56.4	4.6	-9.6	51.4	Peak [Scan]	V						FUND

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Restricted Bands of Operation – FCC Part 15.205 – 5.35-5.46 GHz

Band Edge Measurement

AP-ANT-18, ART=20
802.11n HT-20

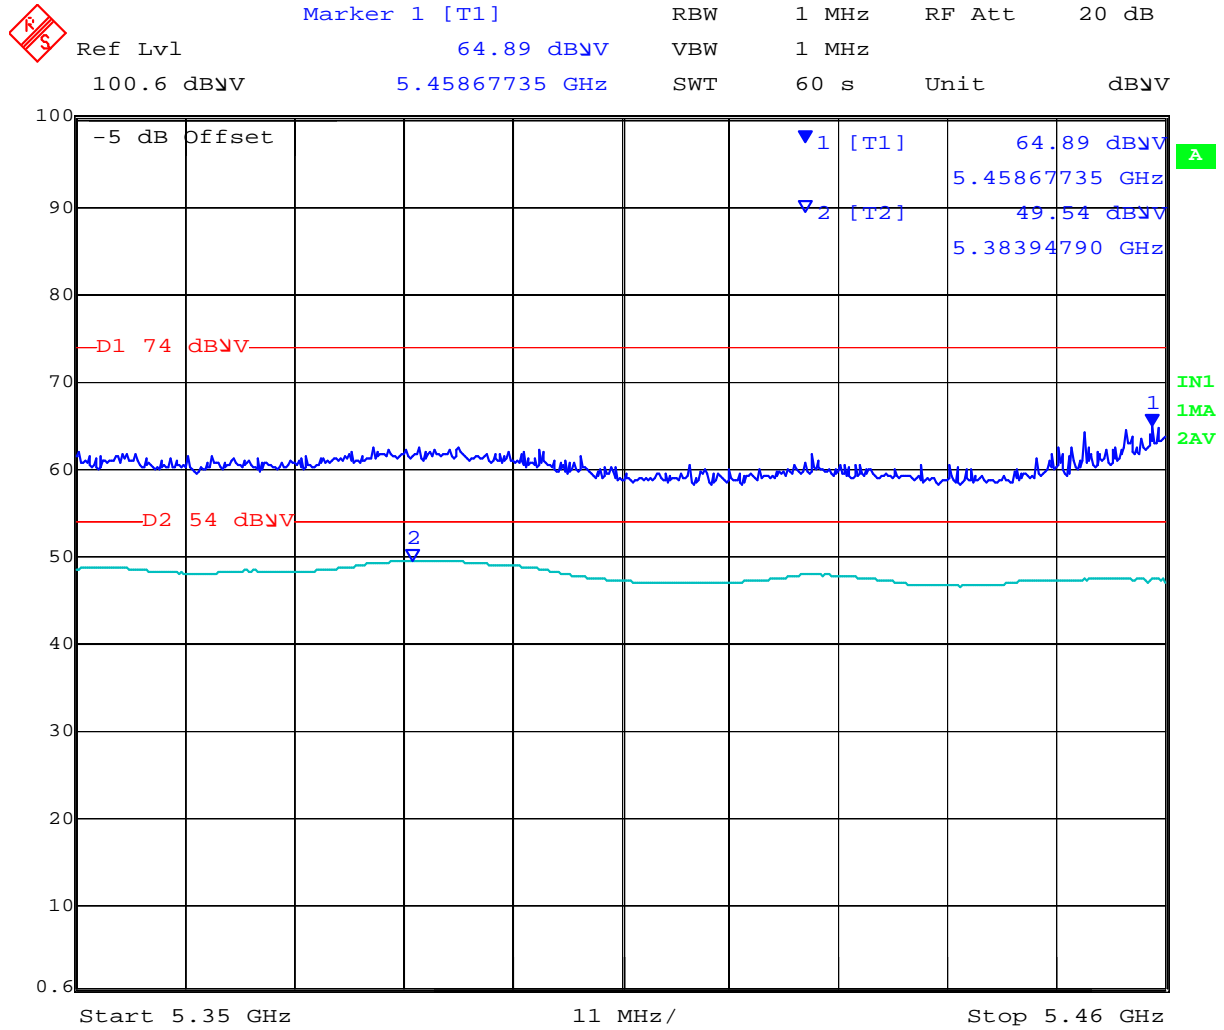


Date: 8.JAN.2012 15:25:19

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 127 of 186

Test Freq.	5580 MHz	Engineer	SB
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	8.5	Press. (mBars)	1003
Antenna	Ant 18	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

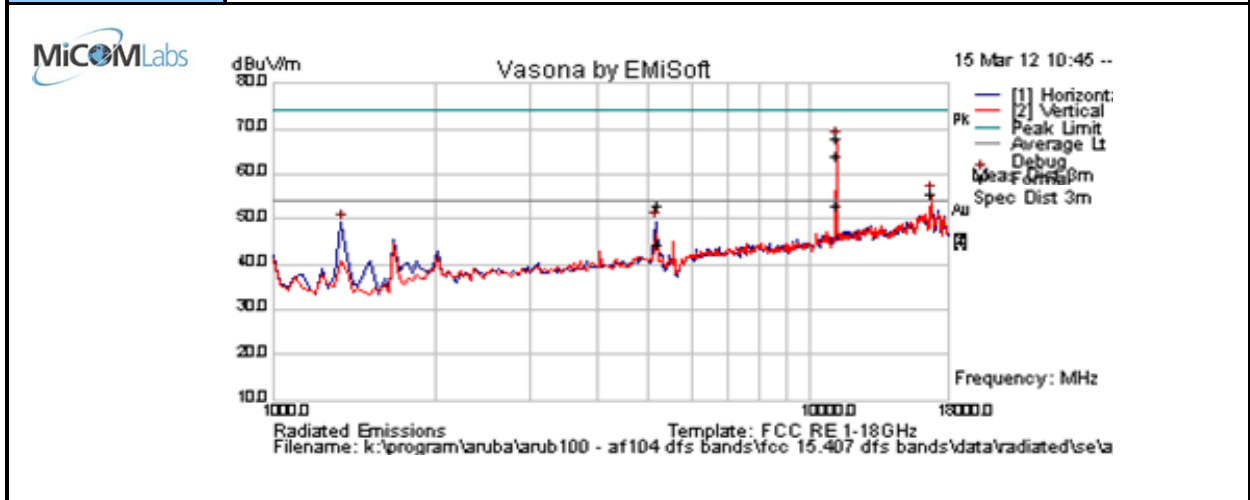

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11159.895	64.0	6.9	-3.0	68.0	Peak Max	V	125	209	74.0	-6.0	Pass	RB
1360.13	63.9	2.3	-14.0	52.1	Peak Max	H	100	326	74.0	-21.9	Pass	RB
11159.895	49.0	6.9	-3.0	53.0	Average Max	V	125	209	54	-1.1	Pass	RB
1360.130	58.5	2.3	-14.0	46.7	Average Max	H	100	326	54	-7.3	Pass	RB
5179.85	58.3	4.6	-9.9	53.0	Peak [Scan]	H						NRB
16739.479	45.8	8.7	0.9	55.4	Peak [Scan]	H						NRB


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 128 of 186

Test Freq.	5700 MHz	Engineer	SB
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	14.0	Press. (mBars)	1003
Antenna	Ant 18	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

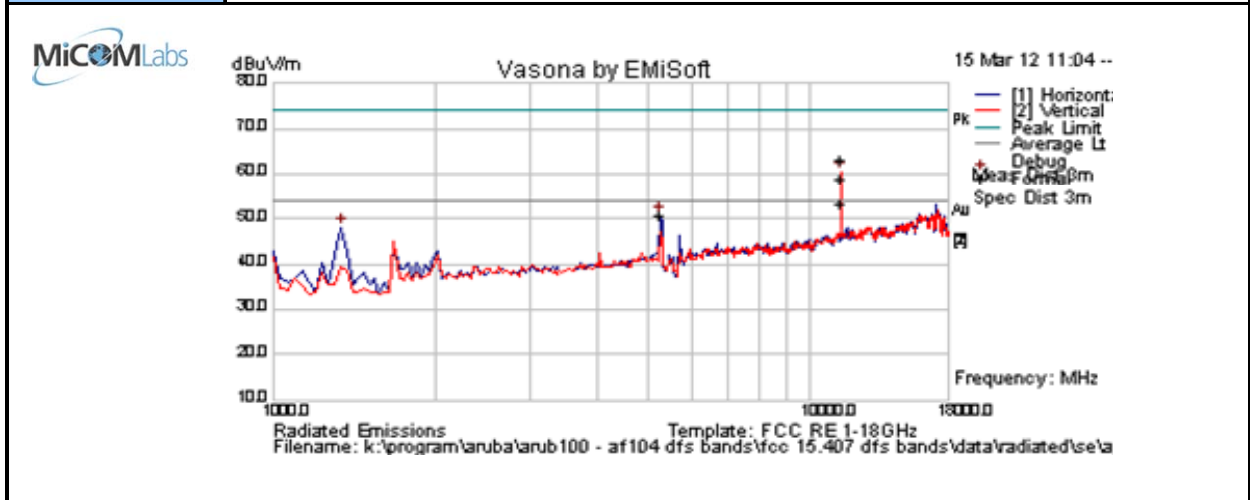

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11399.883	58.6	6.8	-2.3	63.2	Peak Max	V	98	222	74.0	-10.8	Pass	RB
1360.13	63.9	2.3	-14.0	52.1	Peak Max	H	100	326	74.0	-21.9	Pass	RB
11399.883	48.6	6.8	-2.3	53.2	Average Max	V	98	222	54	-0.9	Pass	RB
1360.130	58.5	2.3	-14.0	46.7	Average Max	H	100	326	54	-7.3	Pass	RB
5258.517	55.8	4.6	-9.7	50.6	Peak [Scan]	H						NRB

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 129 of 186

AP-ANT-18

**802.11n HT-40
 5.470-5.725 GHz Band**

Test Freq.	5510 MHz	Engineer	SB
Variant	802.11n HT-40; 13.5 MCS	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	16.0	Press. (mBars)	1003
Antenna	Ant 18	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

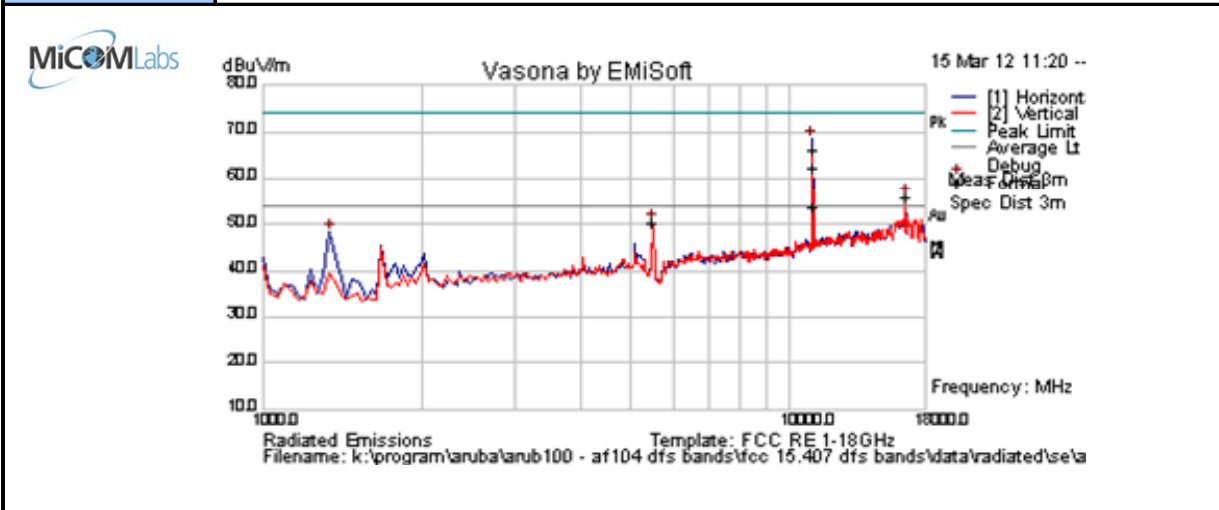

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11019.910	62.2	7.0	-3.1	66.0	Peak Max	H	98	237	74.0	-8.0	Pass	RB
1360.13	63.9	2.3	-14.0	52.1	Peak Max	H	100	326	74.0	-21.9	Pass	RB
11019.910	50.1	7.0	-3.1	53.4	Average Max	H	98	237	54	-0.6	Pass	RB
1360.130	58.5	2.3	-14.0	46.7	Average Max	H	100	326	54	-7.3	Pass	RB
16535.070	46.8	8.8	0.4	56.0	Peak [Scan]	H	150					NRB
5496.994	55.2	4.6	-9.6	50.3	Peak [Scan]	H	100					FUND

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Restricted Bands of Operation – FCC Part 15.205 – 5.35-5.46 GHz

Band Edge Measurement

AP-ANT-18, ART=20
802.11n HT-40

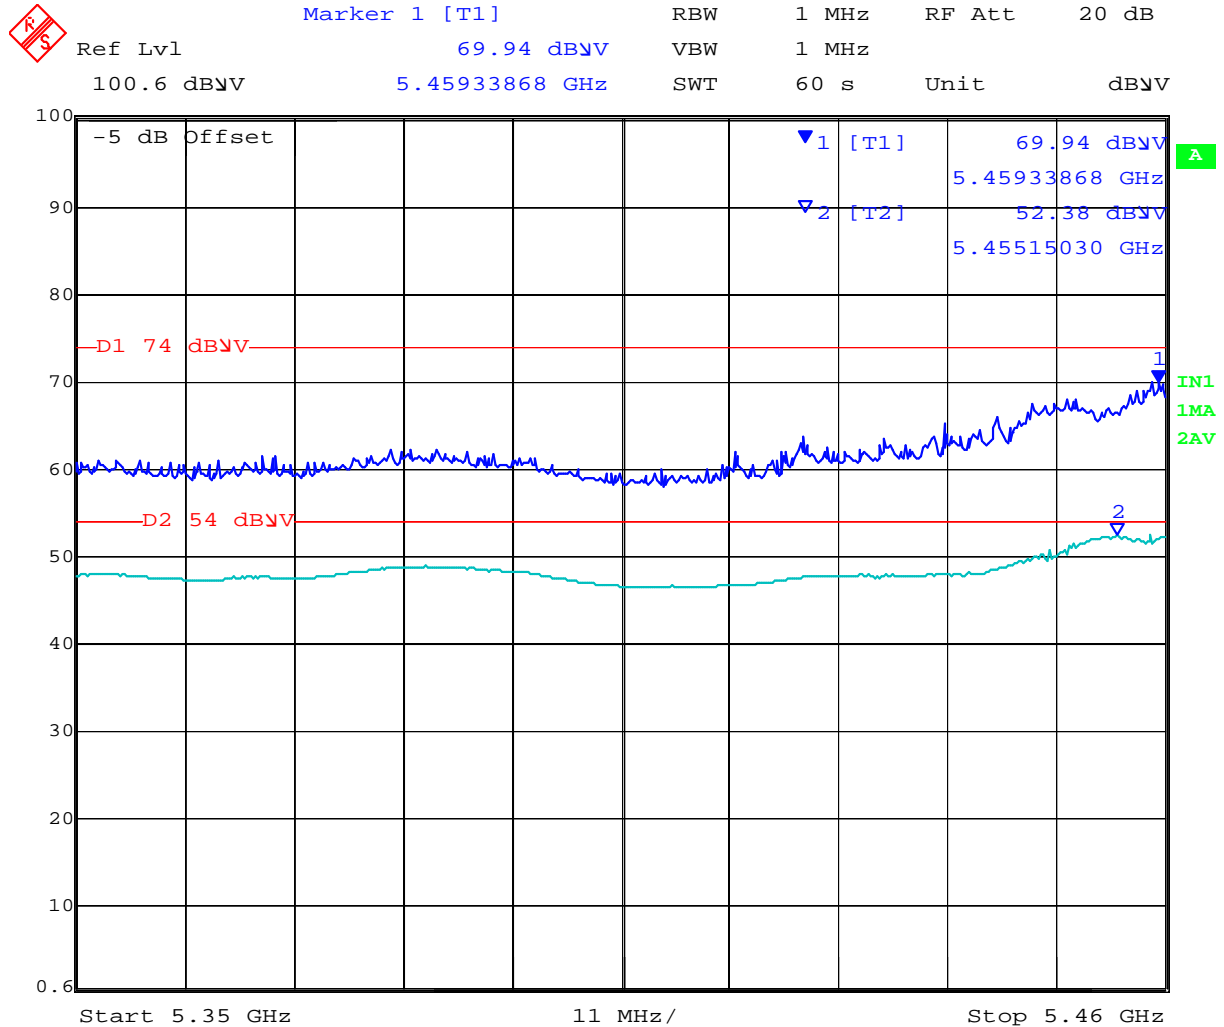


Date: 8.JAN.2012 15:27:30

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 131 of 186

Power Setting	9	Press. (mBars)	1003
Antenna	Ant 18	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

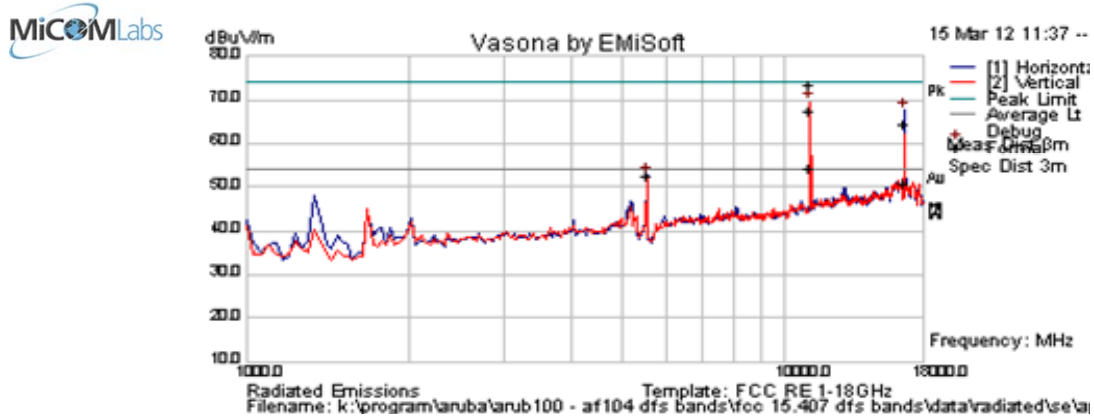

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11099.909	69.9	6.9	-3.2	73.7	Peak Max	V	130	210	74.0	-0.3	Pass	RB
16649.85	55.0	8.7	0.7	64.4	Peak Max	H	98	254				NRB
11099.910	50.2	6.9	-3.2	53.5	Average Max	V	130	210	54	-0.5	Pass	RB
16649.850	41.4	8.7	0.7	50.8	Average Max	H	98	254				NRB
5531.062	57.7	4.6	-9.7	52.7	Peak [Scan]	H	100	0	54	-1.3	Pass	FUND


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 132 of 186

Test Freq.	5690 MHz	Engineer	SB
Variant	802.11n HT-40; 13.5 MCS	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	17.5	Press. (mBars)	1003
Antenna	Ant 18	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

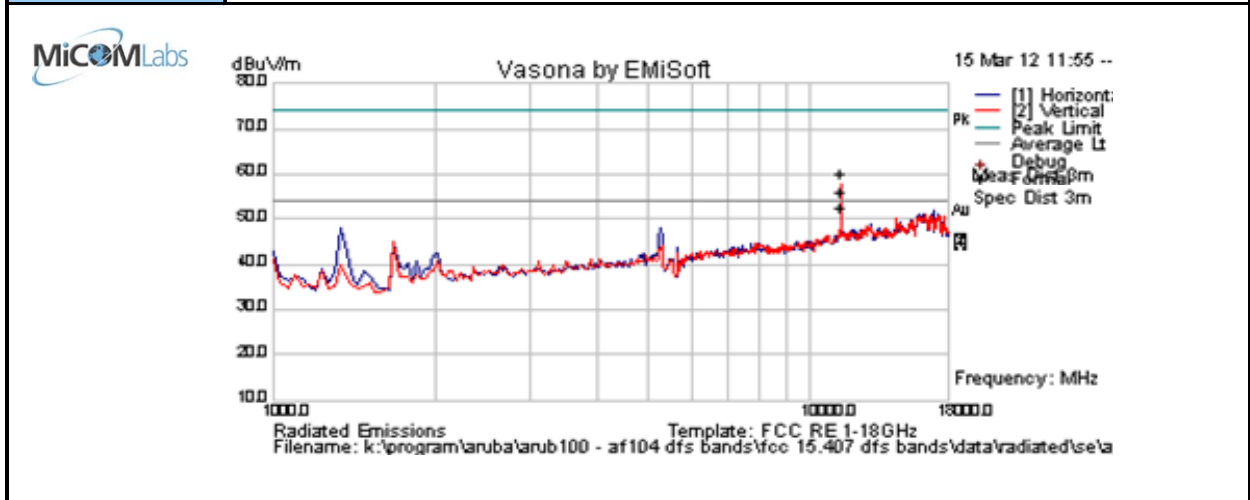

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11379.925	55.5	6.8	-2.3	60.0	Peak Max	V	119	228	74.0	-14.0	Pass	RB
11379.925	48.0	6.8	-2.3	52.6	Average Max	V	119	228	54	-1.4	Pass	RB

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 133 of 186

AP-ANT-19

802.11a
5.25-5.35 GHz Band

Date	Wednesday, March 14, 2012	Tracker #	ARUB100
Lab. Notes			
Lab. Notes			

Test Freq.	5260 MHz	Engineer	SB
Variants	802.11a; 6 Mbs	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	20	Press. (mBars)	1003
Antenna	Ant 19, 6 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

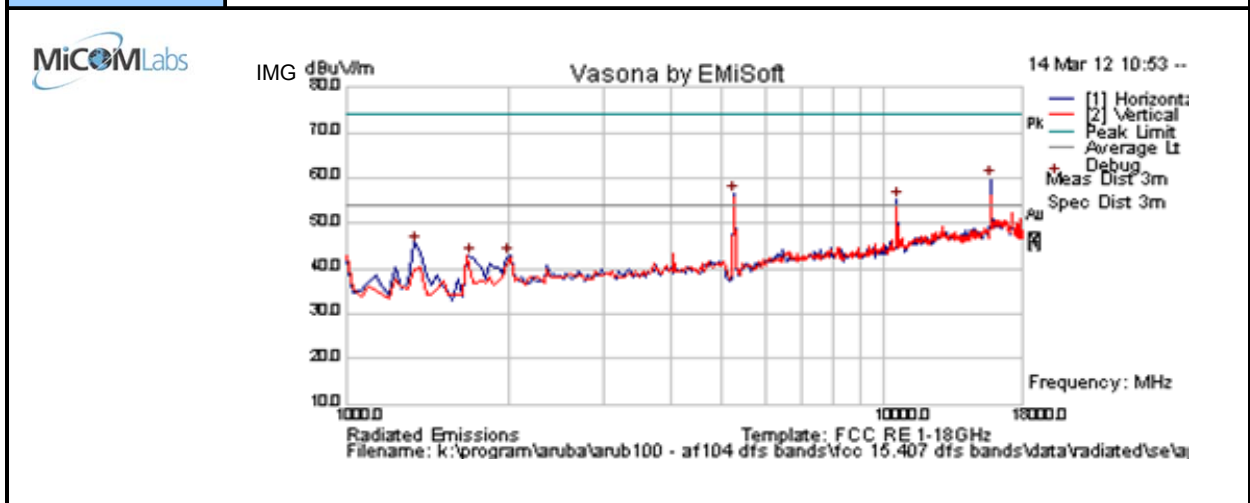

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
15779.996	53.8	8.7	-0.3	62.2	Peak Max	H	132	243	74.0	-11.8	Pass	RB
15779.996	45.0	8.7	-0.3	53.4	Average Max	H	132	243	54.0	-0.6	Pass	RB
5258.517	61.6	4.6	-9.7	56.5	Peak [Scan]	H						FUND
10539.078	50.8	6.8	-2.5	55.1	Peak [Scan]	H						NRB
1350.667	57.1	2.3	-14.0	45.4	Peak [Scan]	H	98	0	54	-8.6	Pass	RB
2006.877	51.7	2.8	-11.9	42.5	Peak [Scan]	H						NRB
1706.968	53.7	2.5	-13.8	42.5	Peak [Scan]	H						NRB


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 134 of 186

Test Freq.	5300 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	17.5	Press. (mBars)	1003
Antenna	Ant 19, 6 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

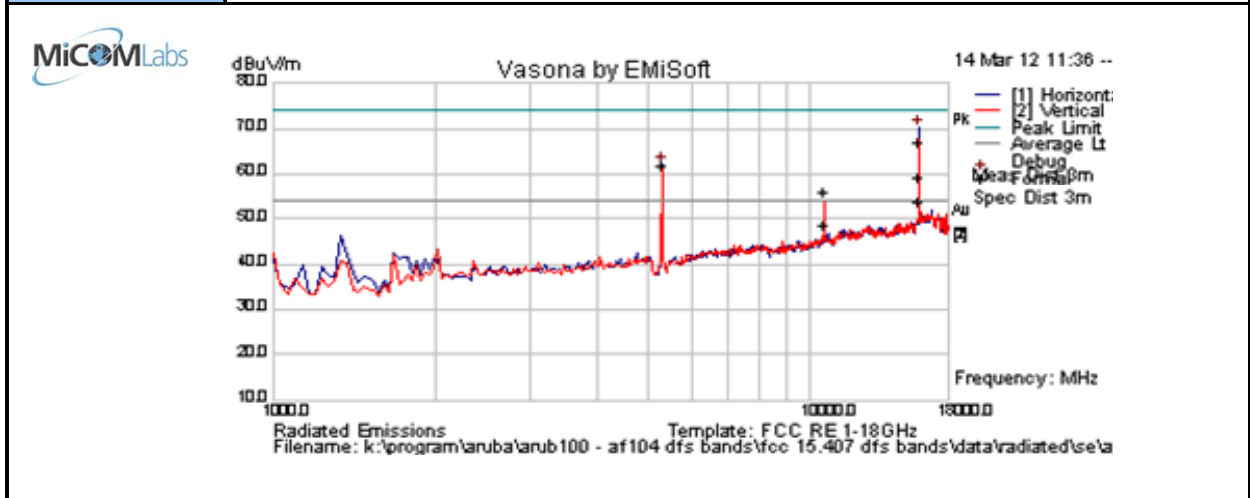

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
15899.890	58.3	8.9	-0.2	67.0	Peak Max	H	156	218	74.0	-7.0	Pass	RB
10599.939	51.4	6.8	-2.4	55.8	Peak Max	V	104	180	74.0	-18.2	Pass	RB
15899.890	45.2	8.9	-0.2	53.9	Average Max	H	153	219	54	-0.1	Pass	RB
10599.939	44.2	6.8	-2.4	48.5	Average Max	V	104	180	54	-5.5	Pass	RB
5292.585	66.9	4.6	-9.6	61.9	Peak [Scan]	H						FUND


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 135 of 186

Test Freq.	5320 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	17.5	Press. (mBars)	1003
Antenna	Ant 19, 6 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

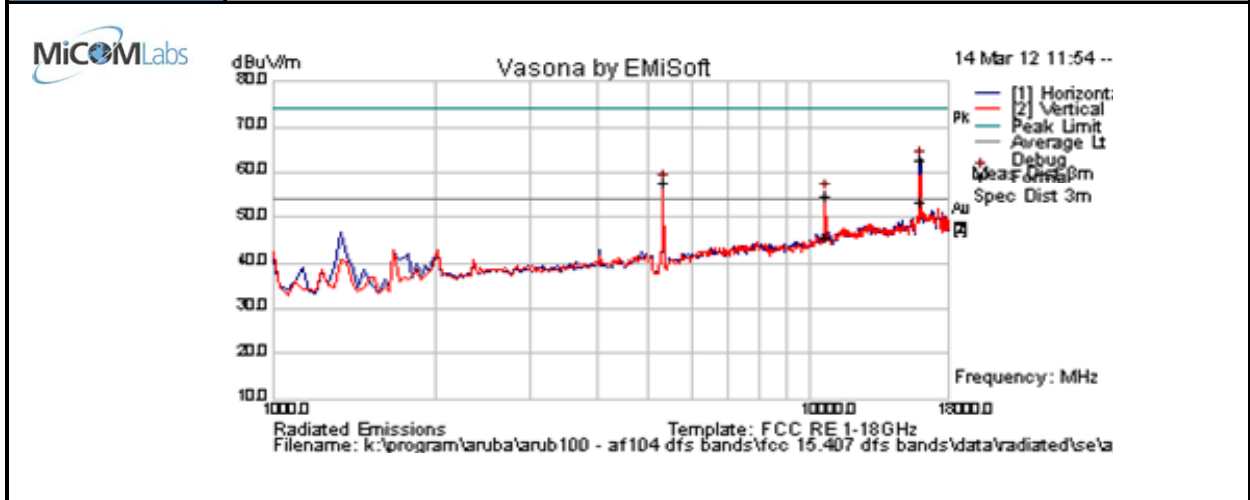

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
15959.965	53.9	9.0	0.0	62.8	Peak Max	H	142	248	74.0	-11.2	Pass	RB
10639.81	50.2	6.8	-2.4	54.6	Peak Max	V	98	183	74.0	-19.4	Pass	RB
15959.965	44.4	9.0	0.0	53.3	Average Max	H	142	248	54.0	-0.7	Pass	RB
10639.810	41.3	6.8	-2.4	45.8	Average Max	V	98	183	54	-8.2	Pass	RB
5326.653	62.5	4.6	-9.5	57.6	Peak [Scan]	V						FUND

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Restricted Bands of Operation – FCC Part 15.205 – 5.35-5.46 GHz

Band Edge Measurement

AP-ANT-19, ART=20
802.11a

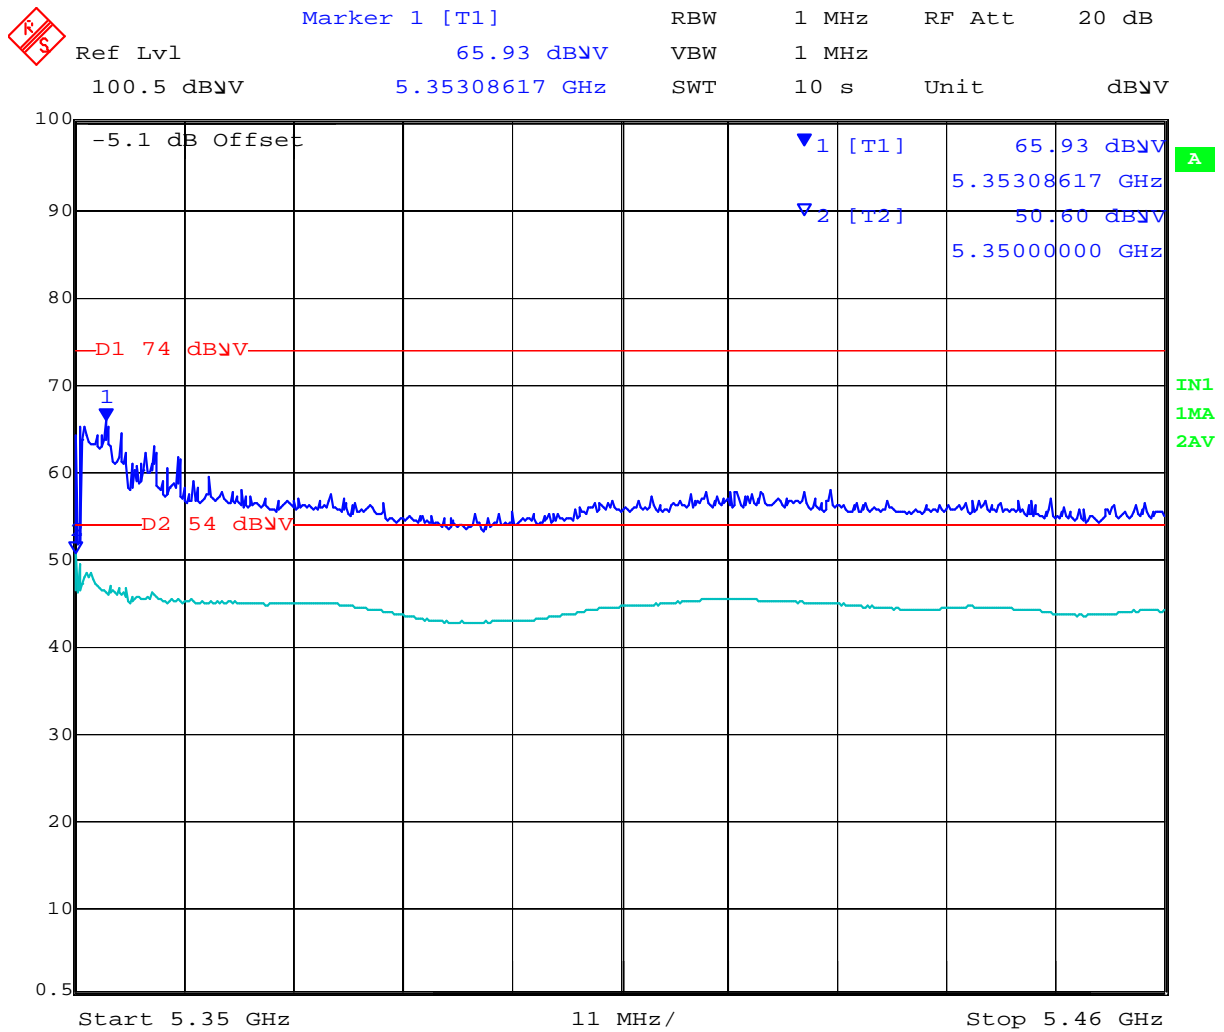

Date: 25.JAN.2012 18:41:34

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 137 of 186

AP-ANT-19

802.11n HT-20
5.25-5.35 GHz Band

Date	Wednesday, March 14, 2012	Tracker #	ARUB100
Lab. Notes			
Lab. Notes			

Test Freq.	5260 MHz	Engineer	SB
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	20	Press. (mBars)	1003
Antenna	Ant 19, 6 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

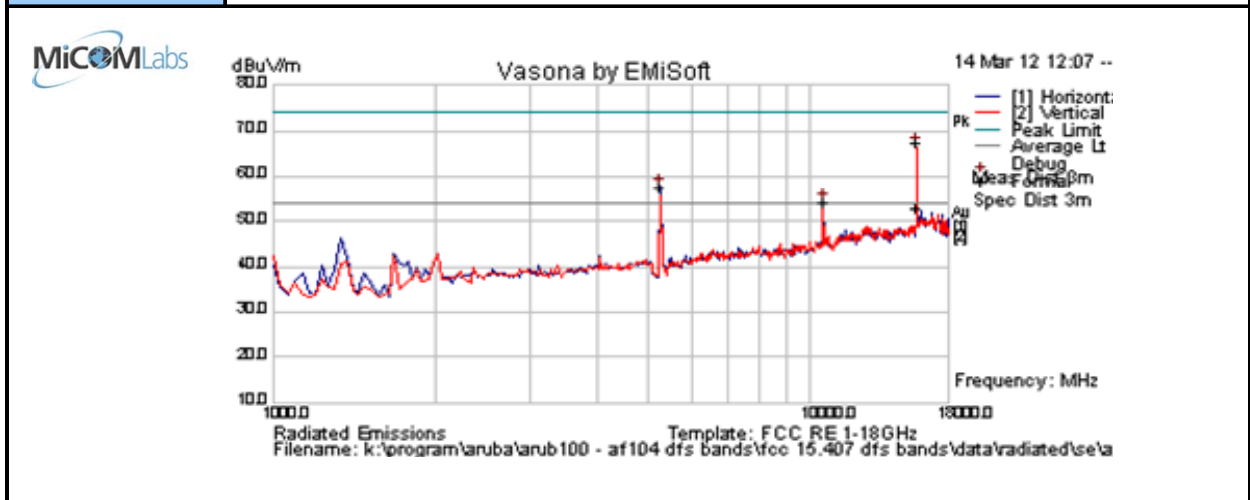

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
15779.940	59.0	8.7	-0.3	67.3	Peak Max	V	145	192	74.0	-6.7	Pass	RB
15779.94	44.4	8.7	-0.3	52.8	Average Max	V	145	192	54.0	-1.2	Pass	RB
5258.517	62.8	4.6	-9.7	57.7	Peak [Scan]	H						FUND
10539.078	50.0	6.8	-2.5	54.4	Peak [Scan]	H						NRB


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 138 of 186

Test Freq.	5300 MHz	Engineer	SB
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	17.5	Press. (mBars)	1003
Antenna	Ant 19, 6 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

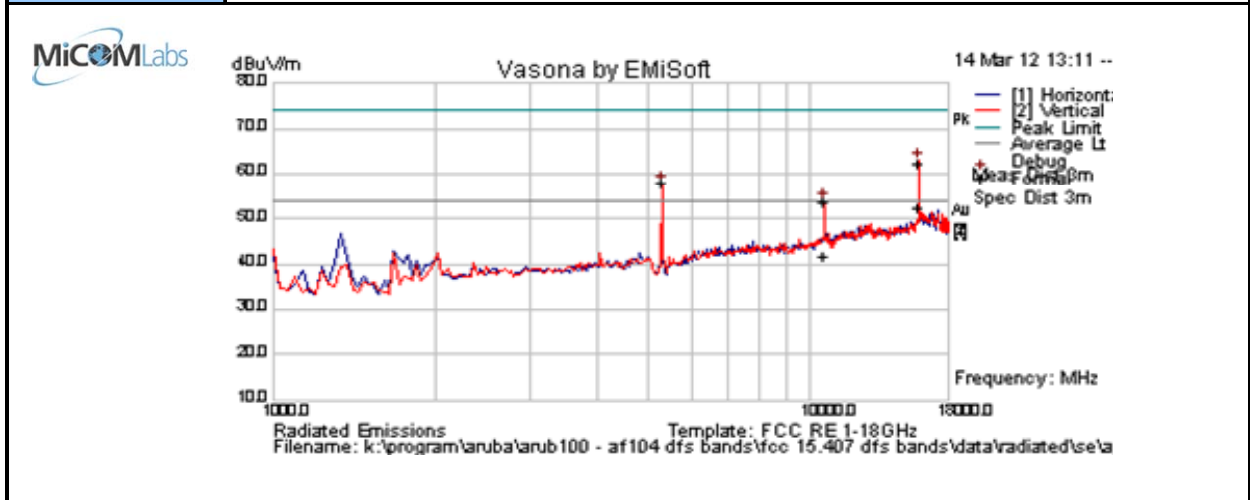

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
15899.930	53.8	8.9	-0.2	62.5	Peak Max	V	98	213	74.0	-11.5	Pass	RB
10599.919	49.2	6.8	-2.4	53.6	Peak Max	V	112	180	74.0	-20.4	Pass	RB
15899.930	43.8	8.9	-0.2	52.5	Average Max	V	98	213	54	-1.5	Pass	RB
10599.919	37.5	6.8	-2.4	41.9	Average Max	V	112	180	54	-12.1	Pass	RB
5292.585	62.8	4.6	-9.6	57.9	Peak [Scan]	V						FUND


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 139 of 186

Test Freq.	5320 MHz	Engineer	SB
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	17.5	Press. (mBars)	1003
Antenna	Ant 19, 6 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

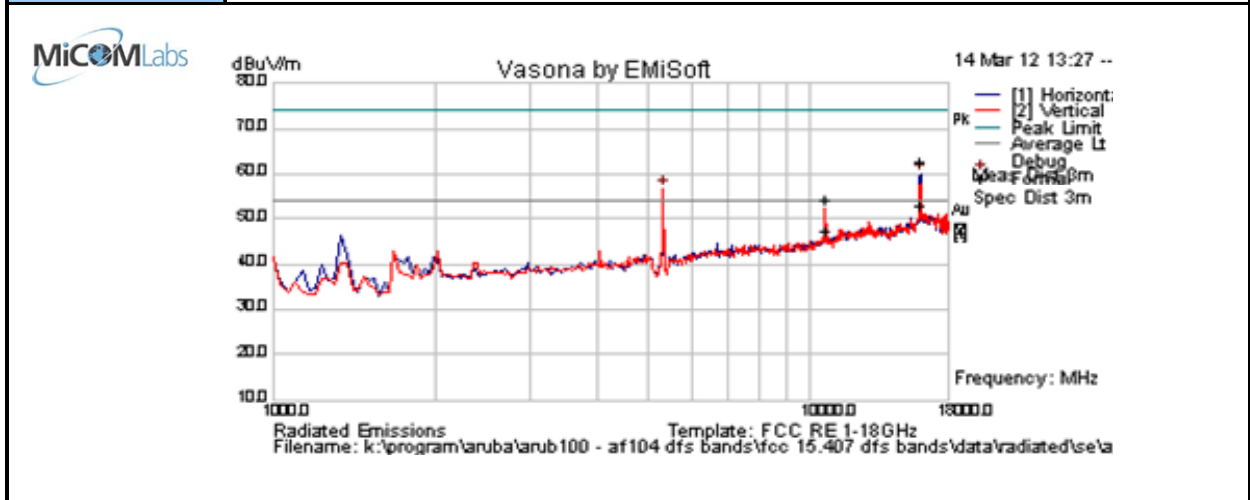

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
15959.780	53.7	9.0	0.0	62.7	Peak Max	H	136	244	74.0	-11.3	Pass	RB
10639.845	49.7	6.8	-2.4	54.2	Peak Max	V	98	182	74.0	-19.8	Pass	RB
15959.780	44.1	9.0	0.0	53.0	Average Max	H	136	244	54	-1.0	Pass	RB
10639.845	42.8	6.8	-2.4	47.2	Average Max	V	98	182	54	-6.8	Pass	RB
5326.653	61.6	4.6	-9.5	56.7	Peak [Scan]	H						FUND

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 140 of 186

Restricted Bands of Operation – FCC Part 15.205 – 5.35-5.46 GHz

Band Edge Measurement

AP-ANT-19, ART=20
802.11n HT-20

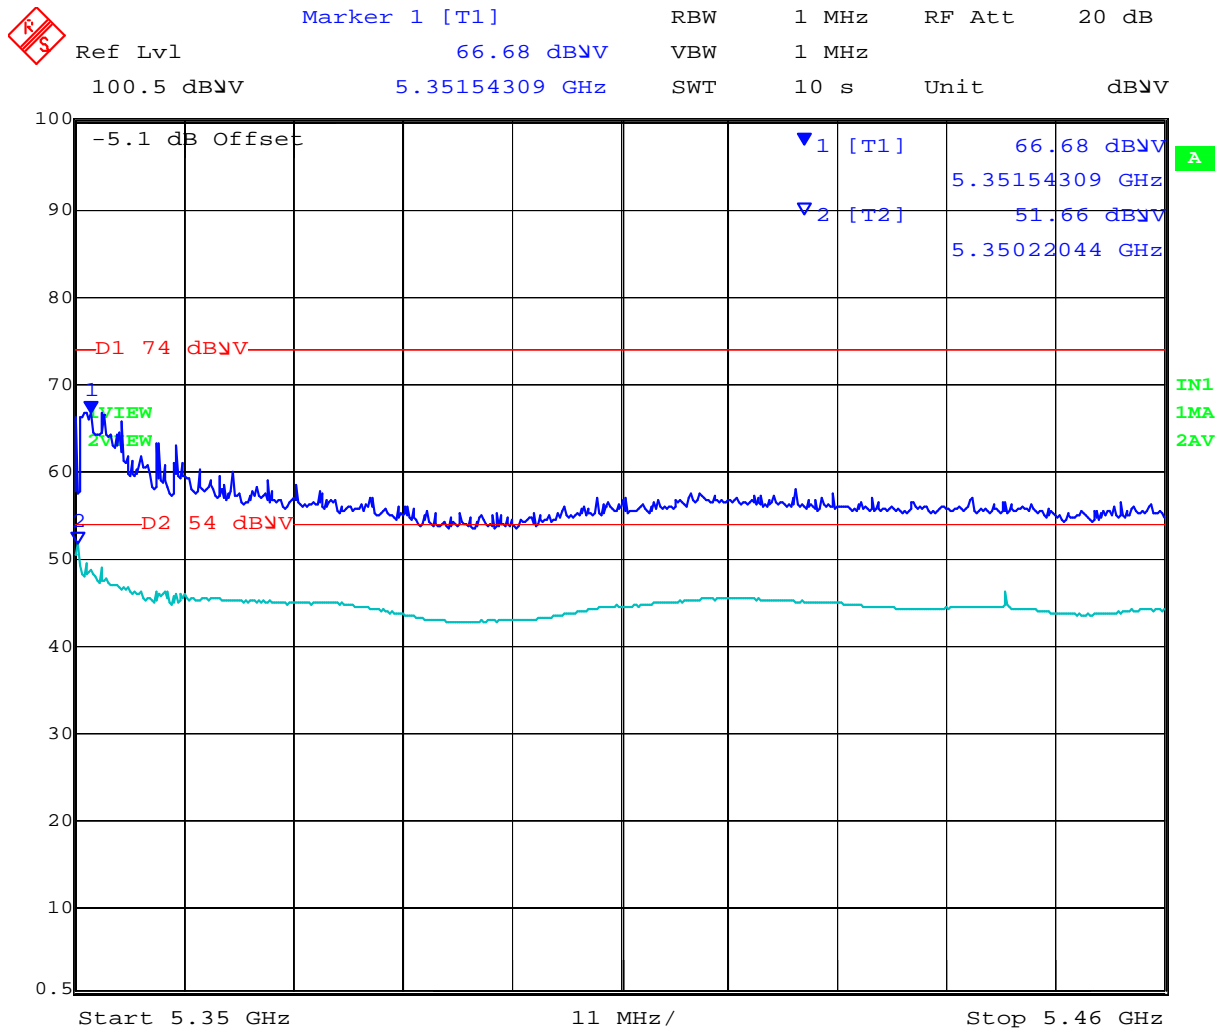

Date: 25.JAN.2012 18:43:35

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 141 of 186

AP-ANT-19

802.11n HT-40
5.25-5.35 GHz Band

Date	Wednesday, March 14, 2012	Tracker #	ARUB100
Lab. Notes			
Lab. Notes			

Test Freq.	5270 MHz	Engineer	SB
Variant	802.11n HT-40; 13.5 MCS	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	20	Press. (mBars)	1003
Antenna	Ant 19, 6 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

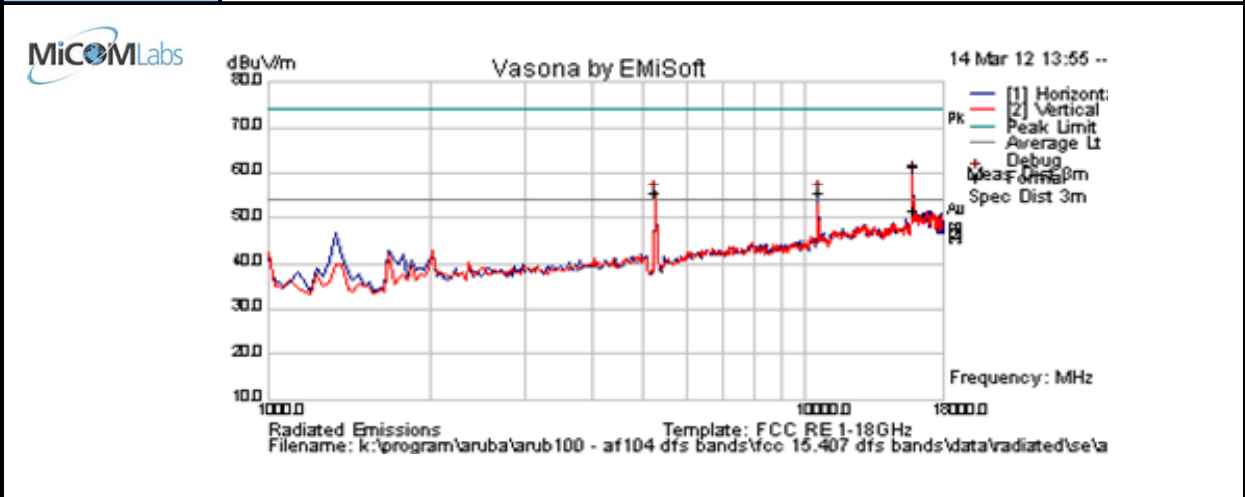

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
15809.950	53.1	8.7	-0.3	61.6	Peak Max	H	121	244	74.0	-12.4	Pass	RB
15809.95	43.2	8.7	-0.3	51.7	Average Max	H	121	244	54.0	-2.3	Pass	RB
5258.517	60.6	4.6	-9.7	55.5	Peak [Scan]	H						FUND
10539.078	51.1	6.8	-2.5	55.4	Peak [Scan]	H						NRB


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 142 of 186

Test Freq.	5310 MHz	Engineer	SB
Variant	802.11n HT-40; 13.5 MCS	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	17.5	Press. (mBars)	1003
Antenna	Ant 19, 6 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

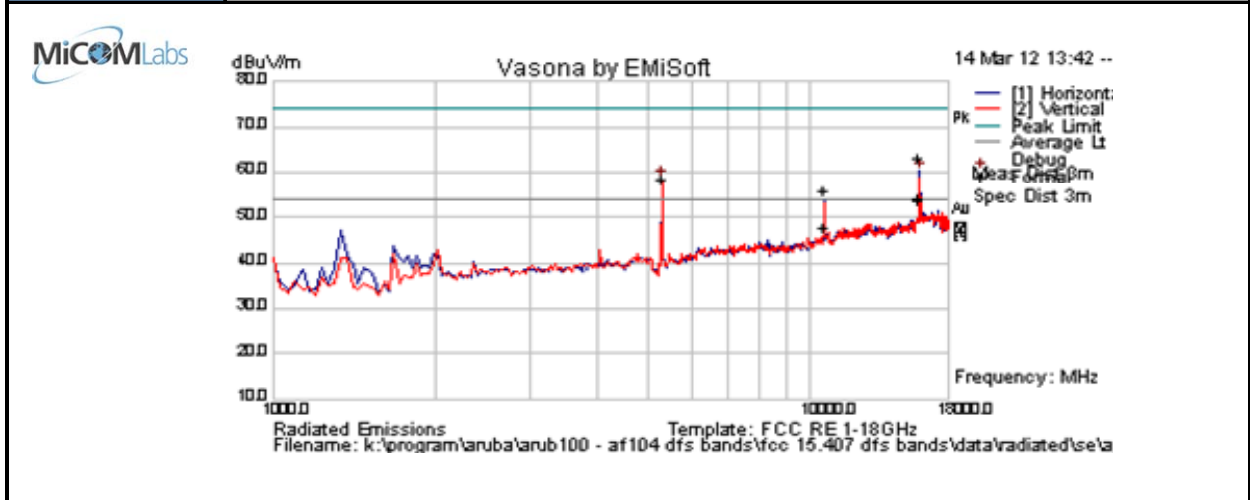

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
15929.800	54.2	8.9	-0.1	63.0	Peak Max	H	169	242	74.0	-11.0	Pass	RB
10619.939	51.6	6.8	-2.4	56.0	Peak Max	H	168	159	74.0	-18.0	Pass	RB
15929.800	45.0	8.9	-0.1	53.8	Average Max	H	169	242	54	-0.2	Pass	RB
10619.939	43.4	6.8	-2.4	47.8	Average Max	H	168	159	54	-6.2	Pass	RB
5292.585	63.4	4.6	-9.6	58.4	Peak [Scan]	H						FUND

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Restricted Bands of Operation – FCC Part 15.205 – 5.35-5.46 GHz

Band Edge Measurement

AP-ANT-19, ART=18
802.11n HT-40

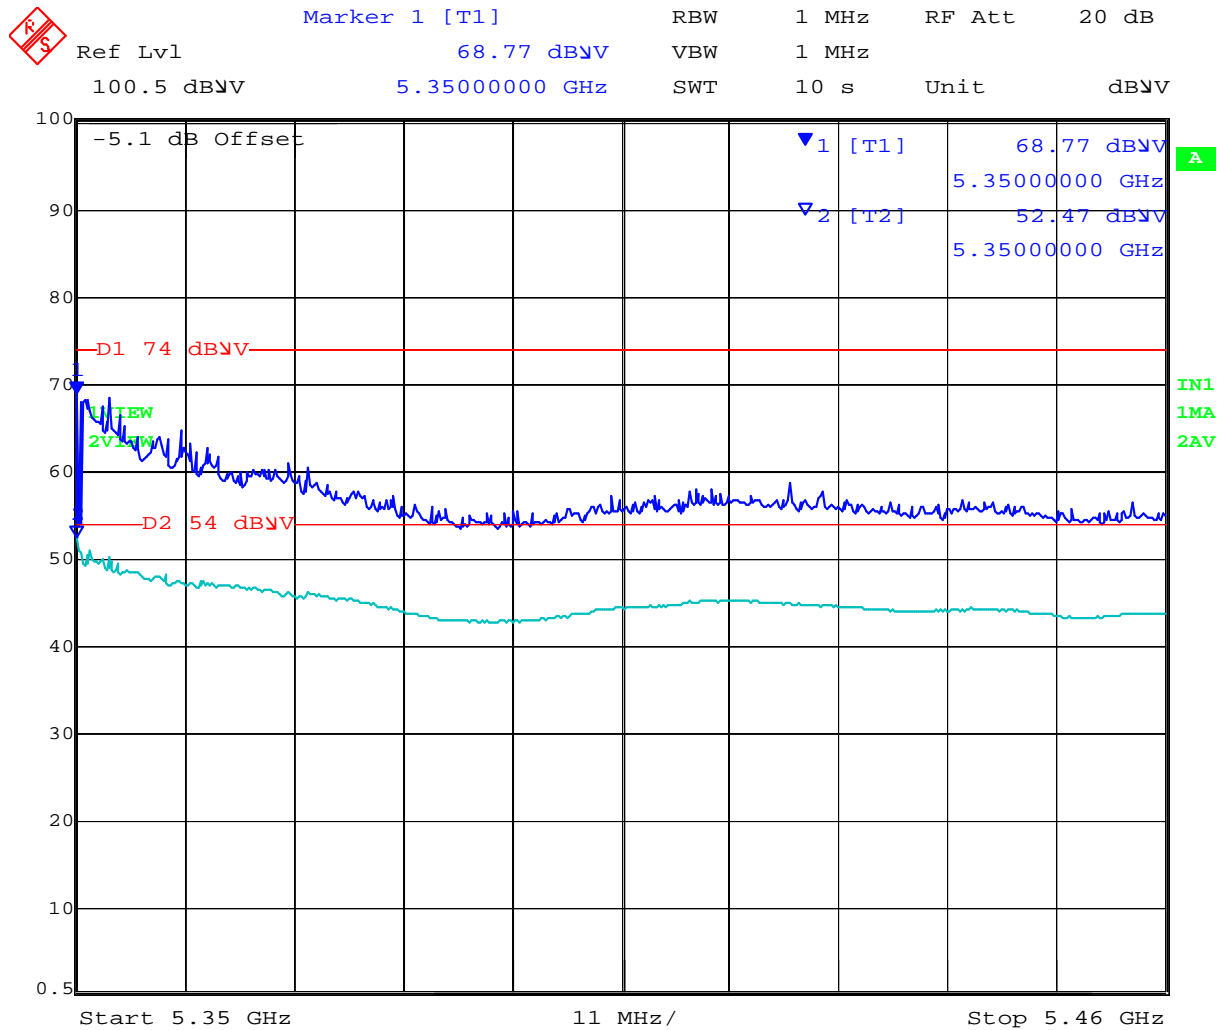

Date: 25.JAN.2012 18:45:42

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 144 of 186

AP-ANT-19

802.11a
5.470-5.725 GHz Band

Test Freq.	5500 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	14.5	Press. (mBars)	1003
Antenna	Ant 19, 6 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

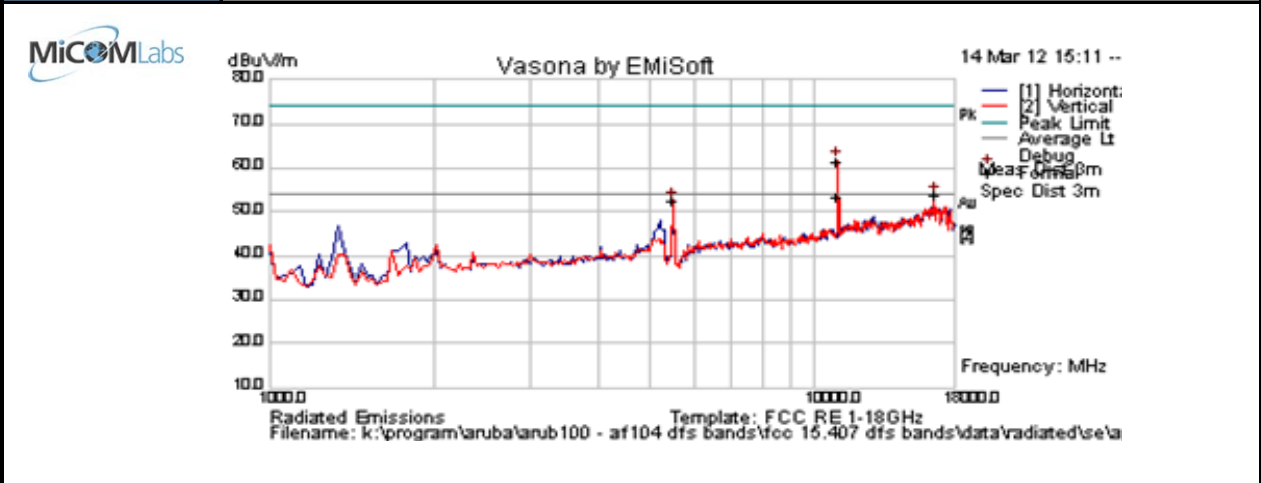

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
10999.995	57.5	7.0	-3.1	61.4	Peak Max	V	98	217	74.0	-12.6	Pass	RB
10999.945	49.6	7.0	-3.1	53.5	Average Max	V	98	217	54.0	-0.5	Pass	RB
16535.070	44.8	8.8	0.4	54.0	Peak [Scan]	V						NRB
5496.994	57.5	4.6	-9.6	52.5	Peak [Scan]	V						FUND

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Restricted Bands of Operation – FCC Part 15.205 – 5.35-5.46 GHz

Band Edge Measurement

AP-ANT-19, ART=20
802.11a

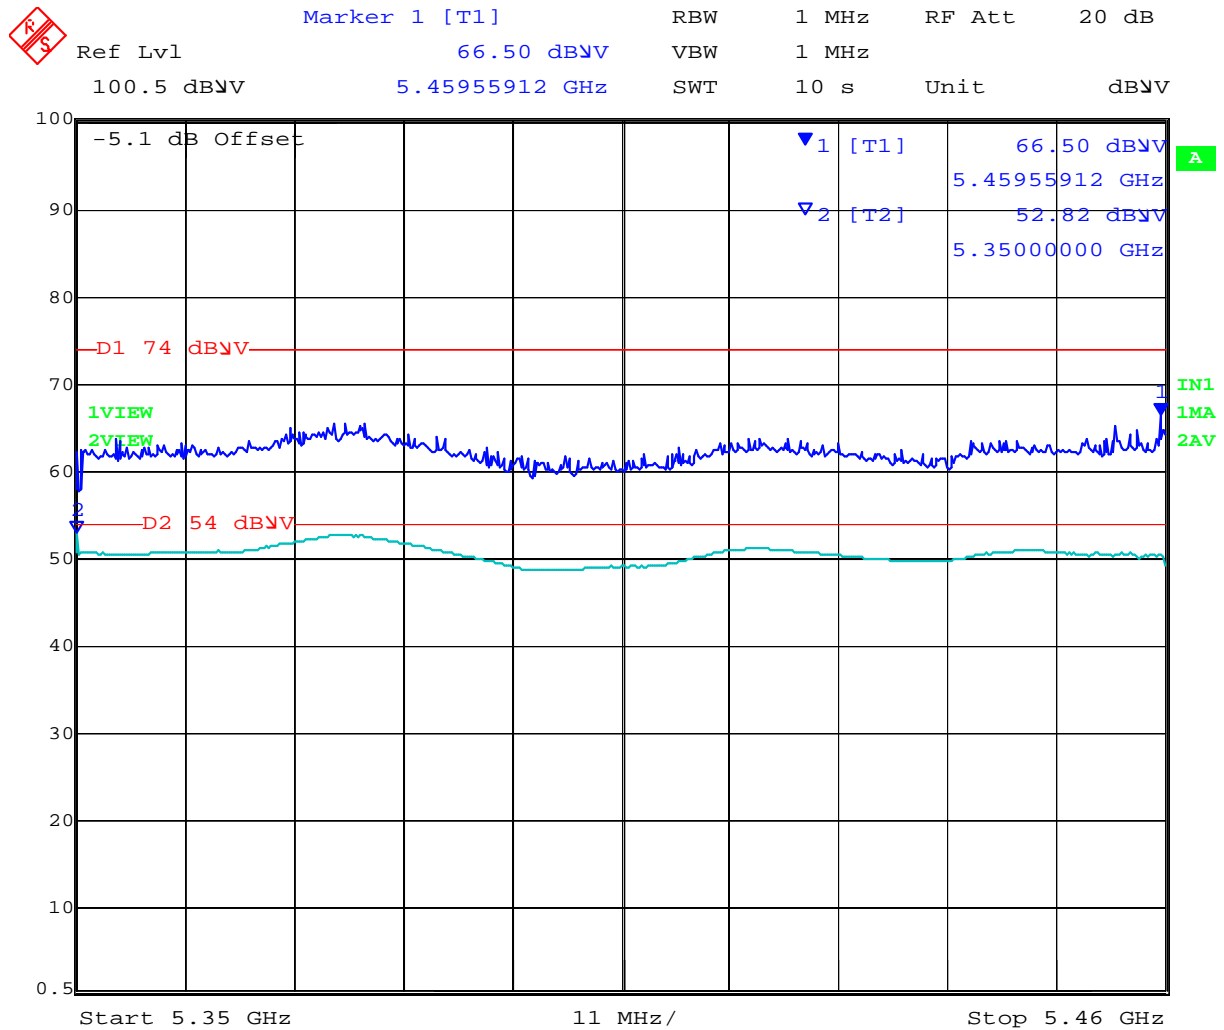


Date: 25.JAN.2012 18:52:25

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 146 of 186

Test Freq.	5580 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	14.5	Press. (mBars)	1003
Antenna	Ant 19, 6 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

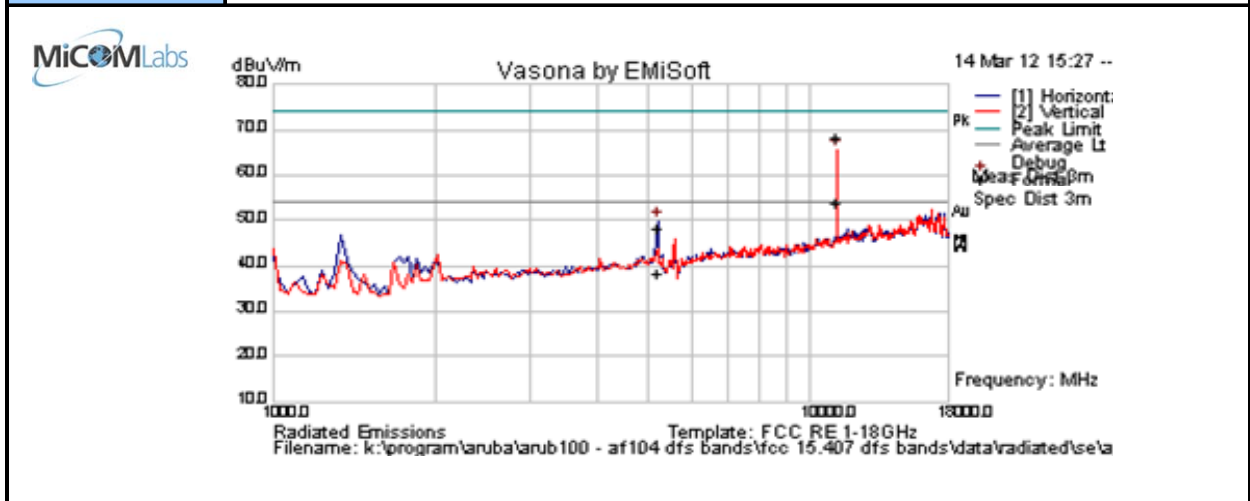

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11179.835	64.2	6.9	-2.9	68.2	Peak Max	V	132	221	74.0	-5.8	Pass	RB
5190.045	53.4	4.6	-9.9	48.1	Peak Max	H	120	238	74.0	-25.9	Pass	RB
11179.835	49.3	6.9	-2.9	53.3	Average Max	V	135	223	54	-0.7	Pass	RB
5190.045	43.7	4.6	-9.9	38.4	Average Max	H	120	238	54	-15.6	Pass	RB


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 147 of 186

Test Freq.	5700 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	14.5	Press. (mBars)	1003
Antenna	Ant 19, 6 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

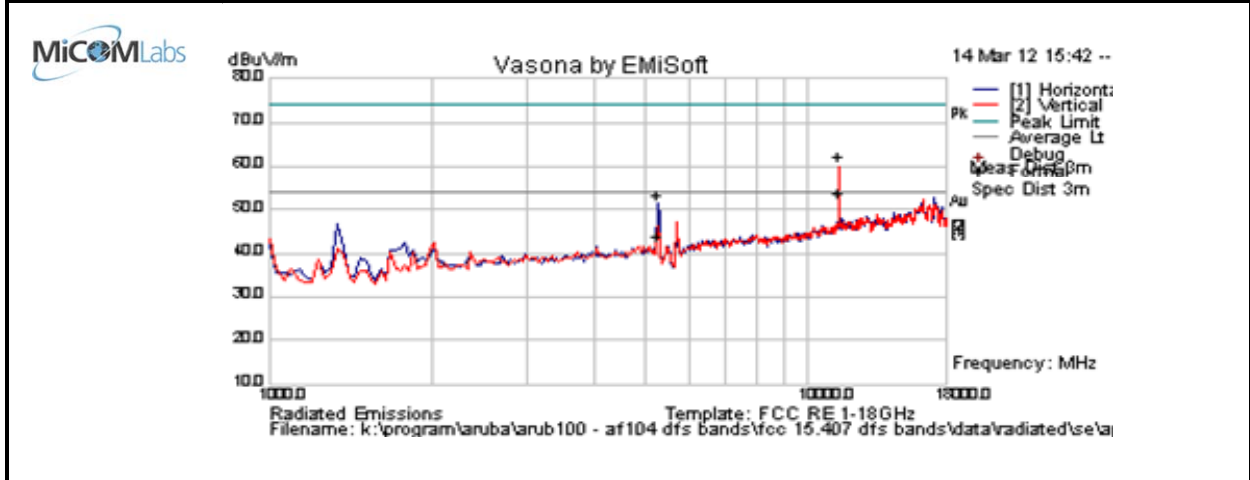

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11399.915	57.9	6.8	-2.3	62.5	Peak Max	V	128	224	74.0	-11.5	Pass	RB
5260.05	58.5	4.6	-9.7	53.4	Peak Max	H	98	233	74.0	-20.6	Pass	RB
11399.915	49.3	6.8	-2.3	53.5	Average Max	V	128	224	54	-0.5	Pass	RB
5260.050	49.0	4.6	-9.7	43.9	Average Max	H	98	233	54	-10.1	Pass	RB

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 148 of 186

AP-ANT-19

802.11n HT-20
5.470-5.725 GHz Band

Date	Wednesday, March 14, 2012	Tracker #	ARUB100
Lab. Notes			
Lab. Notes			

Test Freq.	5500 MHz	Engineer	SB
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	14.0	Press. (mBars)	1003
Antenna	Ant 19, 6 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

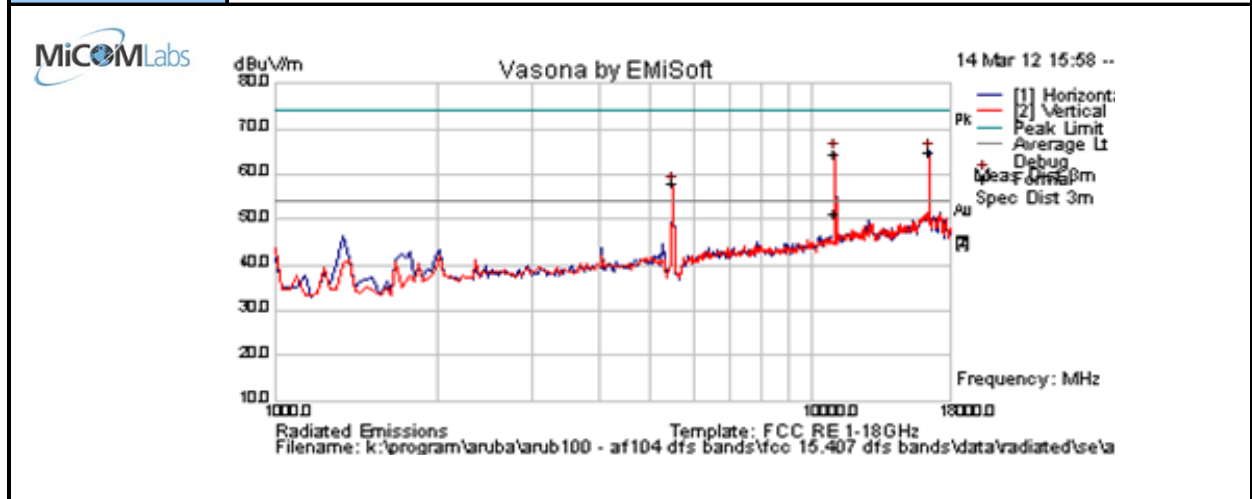

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
10999.882	60.6	7.0	-3.1	64.5	Peak Max	H	98	238	74.0	-9.5	Pass	RB
10999.882	47.3	7.0	-3.1	51.2	Average Max	H	98	237	54.0	-2.8	Pass	RB
16501.002	56.0	8.8	0.3	65.1	Peak [Scan]	H						NRB
5496.994	62.8	4.6	-9.6	57.8	Peak [Scan]	H						FUND

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 149 of 186

Restricted Bands of Operation – FCC Part 15.205 – 5.35-5.46 GHz

Band Edge Measurement

AP-ANT-19, ART=20
802.11n HT-20

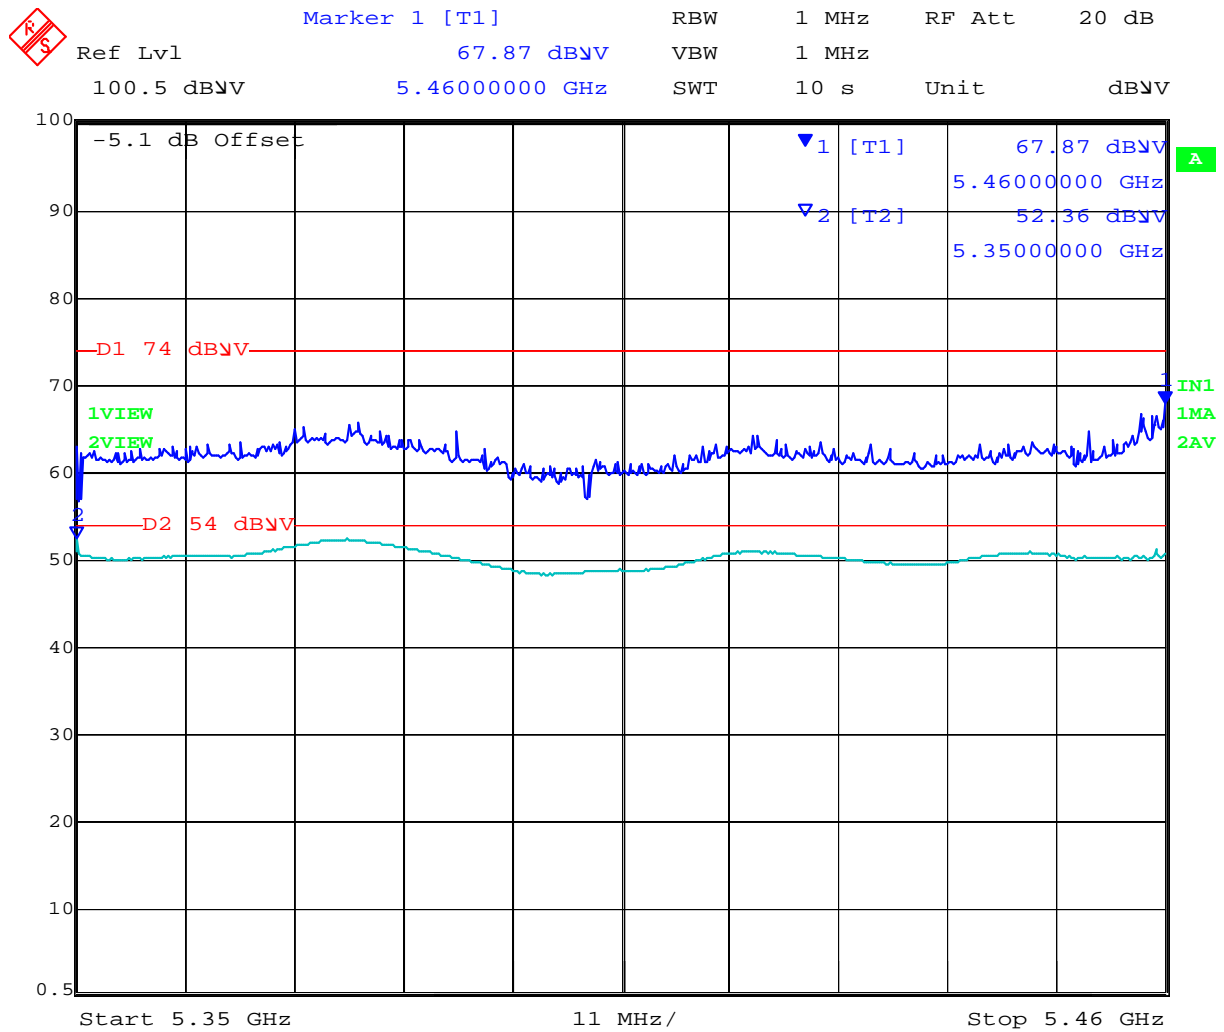


Date: 25.JAN.2012 18:53:32

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 150 of 186

Test Freq.	5580 MHz	Engineer	SB
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	10.0	Press. (mBars)	1003
Antenna	Ant 19, 6 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

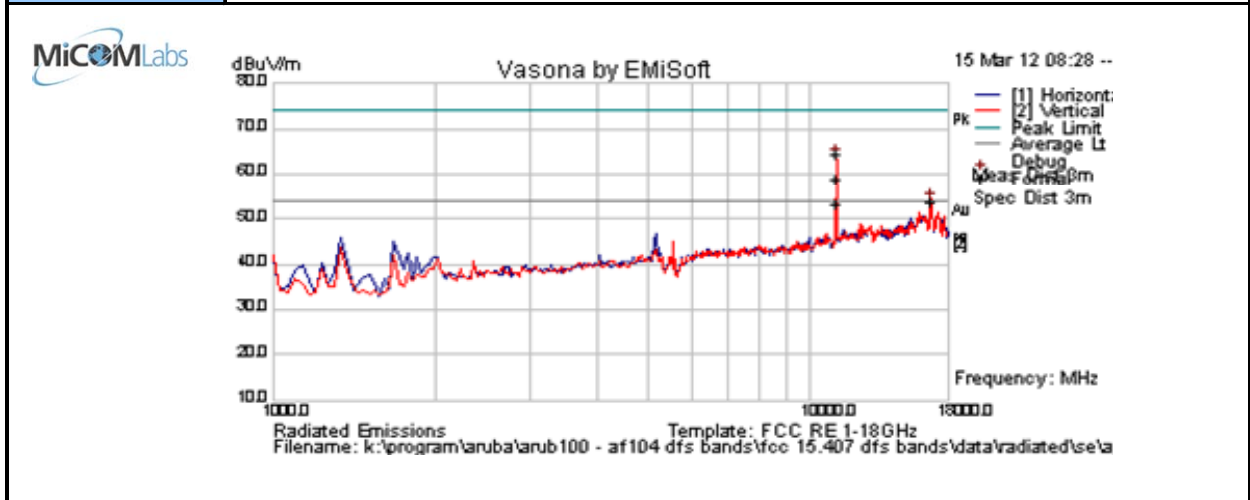

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11159.895	60.8	6.9	-3.0	64.7	Peak Max	V	133	231	74.0	-9.3	Pass	RB
11159.895	49.3	6.9	-3.0	53.3	Average Max	V	133	231	54	-0.7	Pass	RB
16744.416	44.3	8.7	0.9	53.8	Peak [Scan]	V	98	361	54	-0.2	Pass	NRB


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 151 of 186

Test Freq.	5700 MHz	Engineer	SB
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	16	Press. (mBars)	1003
Antenna	Ant 19, 6 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

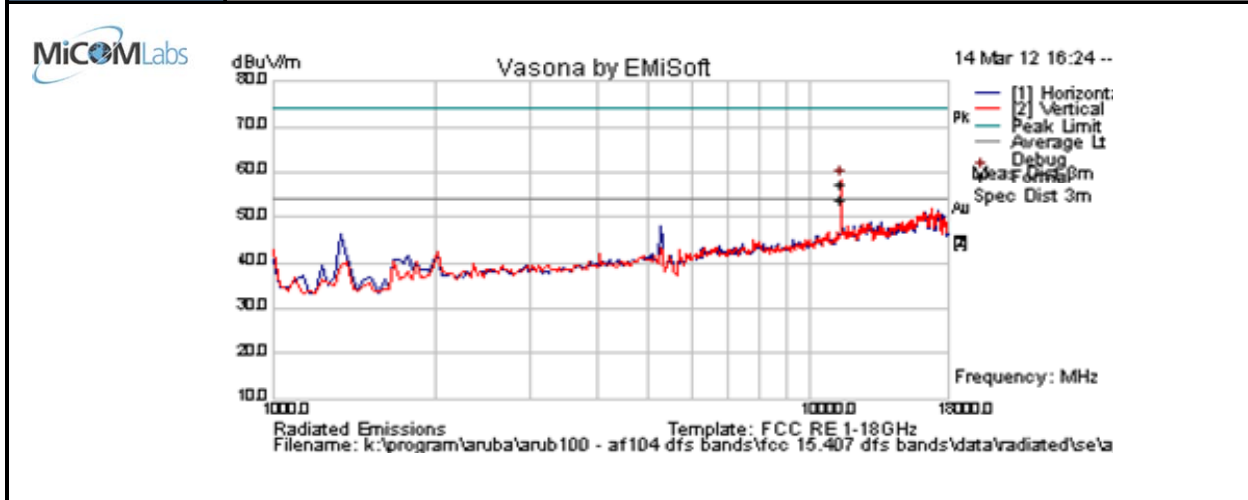

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11399.895	52.6	6.8	-2.3	57.2	Peak Max	V	98	219	74.0	-16.8	Pass	RB
11399.845	49.1	6.8	-2.3	53.7	Average Max	V	98	219	54.0	-0.3	Pass	RB

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 152 of 186

AP-ANT-19

**802.11n HT-40
 5.470-5.725 GHz Band**

Date	Wednesday, March 14, 2012	Tracker #	ARUB100
Lab. Notes			
Lab. Notes			

Test Freq.	5510 MHz	Engineer	SB
Variant	802.11n HT-40; 13.5 MCS	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	20	Press. (mBars)	1003
Antenna	Ant 19, 6 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

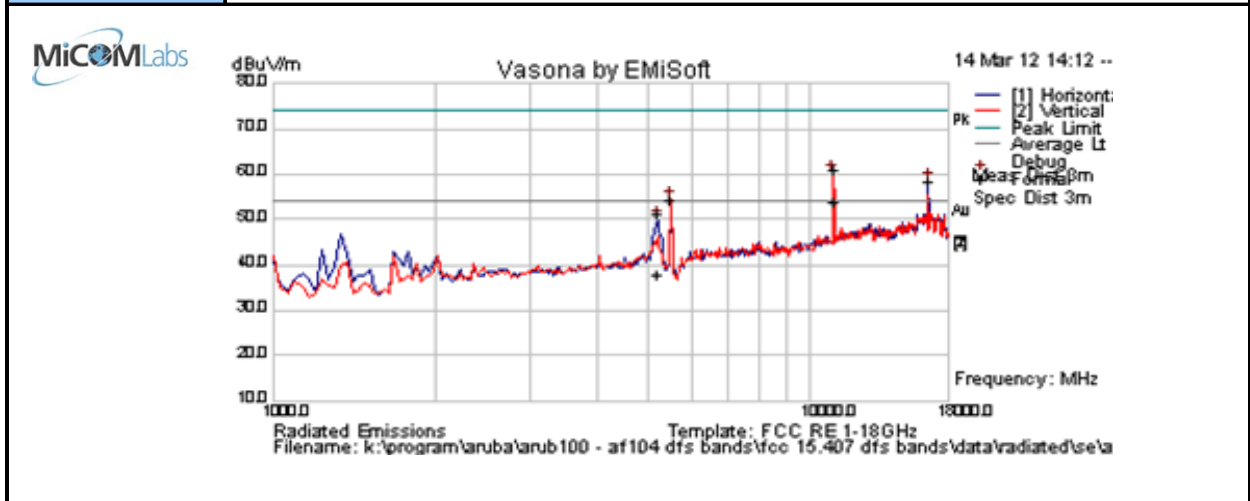

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11019.890	57.0	7.0	-3.1	60.9	Peak Max	V	154	237	74.0	-13.1	Pass	RB
5216.673	56.2	4.6	-9.8	51.0	Peak Max	H	138	232	74.0	-23.0	Pass	BE
5216.673	43.1	4.6	-9.8	37.9	Average Max	H	138	232	54	-16.1	Pass	BE
11019.890	49.9	7.0	-3.1	53.7	Average Max	H	155	236	54	-0.3	Pass	RB
16535.070	49.1	8.8	0.4	58.3	Peak [Scan]	H						NRB
5496.994	59.3	4.6	-9.6	54.3	Peak [Scan]	V						FUND

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Restricted Bands of Operation – FCC Part 15.205 – 5.35-5.46 GHz

Band Edge Measurement

AP-ANT-19, ART=19 802.11n HT-40

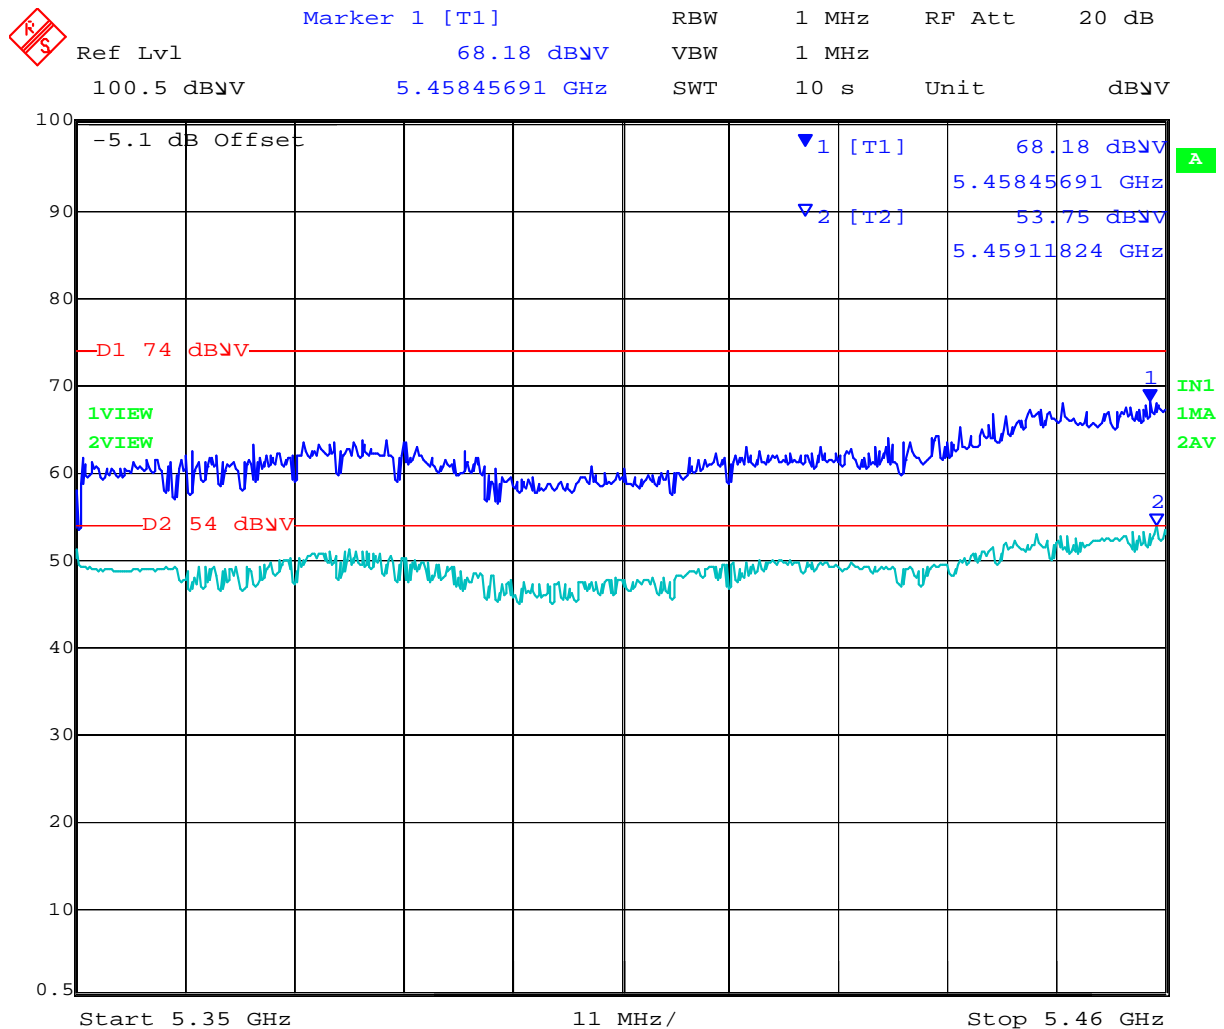


Date: 25.JAN.2012 18:50:39

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 154 of 186

Test Freq.	5550 MHz	Engineer	SB
Variant	802.11n HT-40; 13.5 MCS	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	13.0	Press. (mBars)	1003
Antenna	Ant 19, 6 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

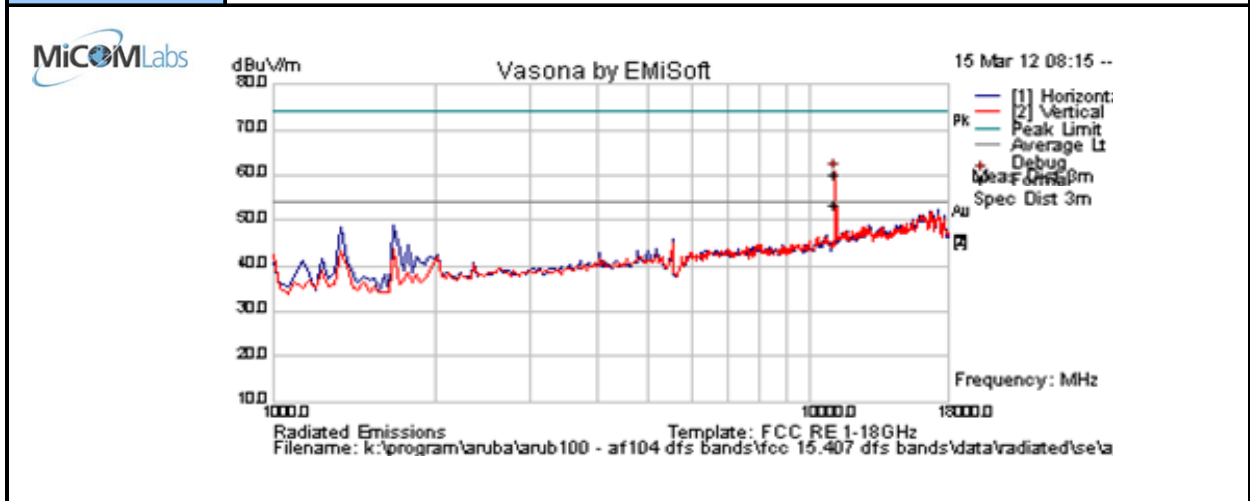

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11099.934	56.3	6.9	-3.2	60.1	Peak Max	H	100	214	74.0	-13.9	Pass	RB
11099.934	49.6	6.9	-3.2	53.4	Average Max	H	100	214	54.0	-0.6	Pass	RB


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 155 of 186

Test Freq.	5690 MHz	Engineer	SB
Variant	802.11n HT-40; 13.5 MCS	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	16.5	Press. (mBars)	1003
Antenna	Ant 19, 6 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

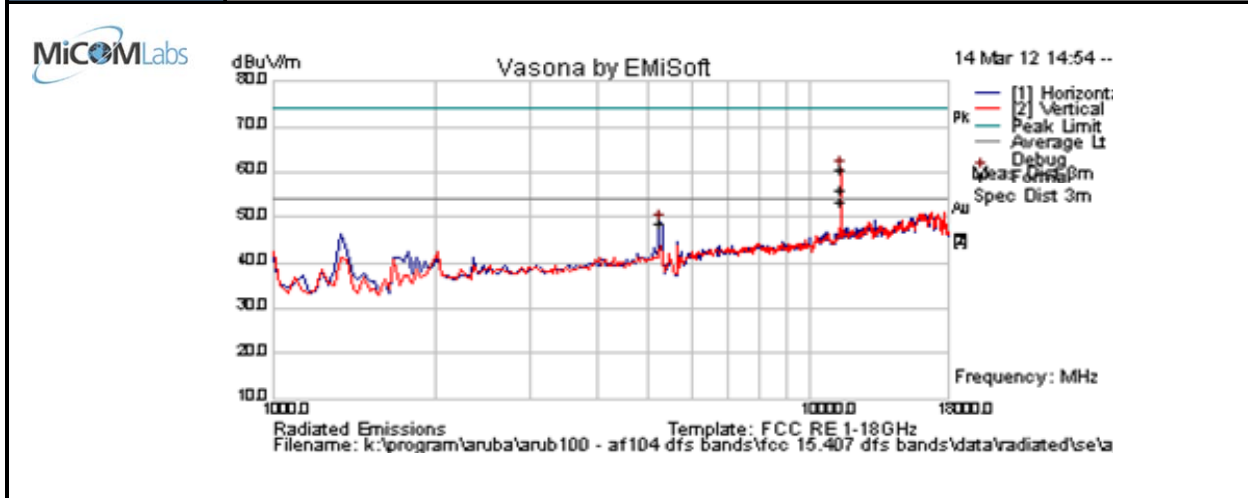

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11379.910	56.3	6.8	-2.3	60.8	Peak Max	V	98	218	74.0	-13.2	Pass	RB
11379.910	48.8	6.8	-2.3	53.3	Average Max	V	98	217	54	-0.7	Pass	RB
5258.517	53.8	4.6	-9.7	48.7	Peak [Scan]	H	100	0	54	-5.3	Pass	BE

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Specification

Limits

15.407 (b)(2). All emissions outside of the 5,150-5,350MHz band shall not exceed an EIRP of -27dBm/MHz.

§15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

§15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

RSS-210 §A9.3(2) For transmitters operating in the 5250-5350 MHz band, all emissions outside the 5150-5350 MHz band shall not exceed -27 dBm/MHz e.i.r.p. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band shall not exceed out of band emission limit of 27 dBm/MHz e.i.r.p. in the 5150-5250 MHz band in order to operate indoor/outdoor, or alternatively shall comply with the spectral power density for operation within the 5150-5250 MHz band and shall be labeled "for indoor use only".

RSS-Gen §4.7 The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate of carrier frequency), or from 30 MHz, whichever is the lowest frequency, to the 5th harmonic of the highest frequency generated without exceeding 40 GHz.

RSS-Gen §6 Receiver Spurious Emission Standard

If a radiated measurement is made, all spurious emissions shall comply with the limits of the following Table. The resolution bandwidth of the spectrum analyzer shall be 100 kHz for spurious emission measurements below 1.0 GHz and 1.0 MHz for measurements above 1.0 GHz

§15.209 (a) Limit Matrix

Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 157 of 186

Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.7.2. Receiver Radiated Spurious Emissions (above 1 GHz)

Industry Canada RSS-Gen §4.10, §6


Test Procedure

Radiated emissions above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

All measurements on any frequency or frequencies over 1 MHz are based on the use of measurement instrumentation employing an average detector function. All measurements above 1 GHz were performed using a minimum resolution bandwidth of 1 MHz.

All Sectors of the EUT were tested simultaneously.

Test Measurement Set up

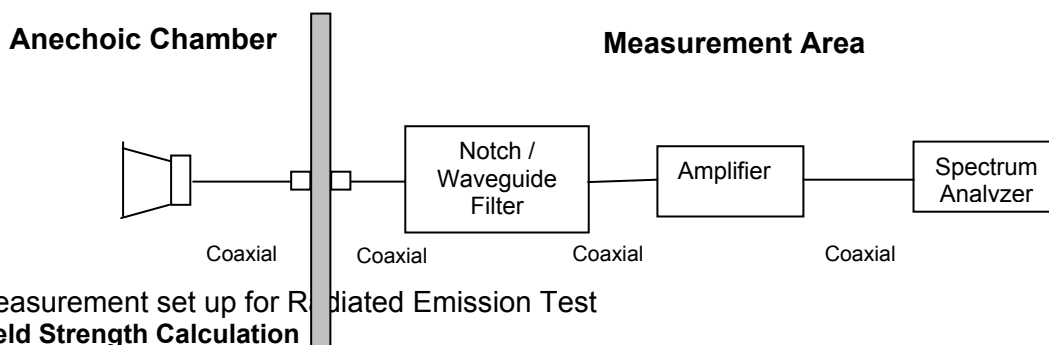

Measurement set up for Radiated Emission Test

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where: FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 159 of 186

For example:

Given receiver input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu\text{V/m}))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

Section 5.1.6.1 Transmitter Spurious above 1 GHz identifies that emissions peaking above 54 dB μ V/m emanate from the EUT and not transmitted through the antenna port. These (1 – 3.5 GHz) emissions were formally measured and characterized and are not considered when examining Receiver Radiated Spurious above 1 GHz.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 160 of 186

AP-ANT-18

802.11a/n HT-20/ n HT-20
5.250-5.350 GHz Band

Date	Thursday, March 15, 2012	Tracker #	ARUB100
Lab. Notes			
Lab. Notes			

Test Freq.	5260 MHz	Engineer	SB
Variant	Receive in Test Utility	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	Not Applicable in Receive Mode	Press. (mBars)	1003
Antenna	ANT 18		
Test Notes 1			
Test Notes 2			

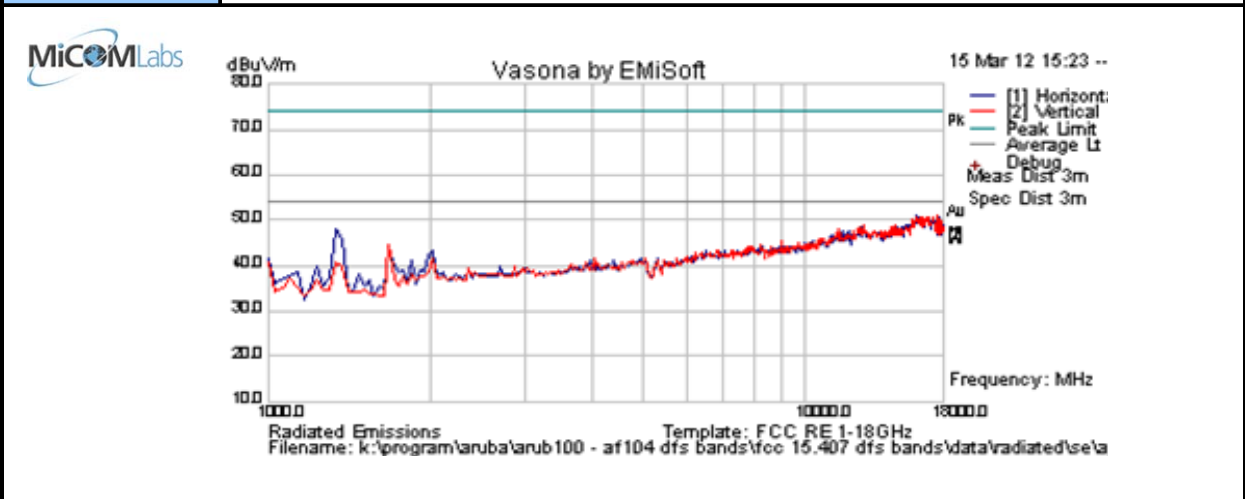

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
No Receiver Emissions Within 6dB of limit.												
Legend: RB = Restricted Band; NRB = Non-Restricted Band; FUND = Fundamental Freq. BE = Emission in Restricted Band Nearest Transmission Band Edge;												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 161 of 186

Test Freq.	5300 MHz	Engineer	SB
Variant	Receive in Test Utility	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	Not Applicable in Receive Mode	Press. (mBars)	1003
Antenna	ANT 18		
Test Notes 1			
Test Notes 2			

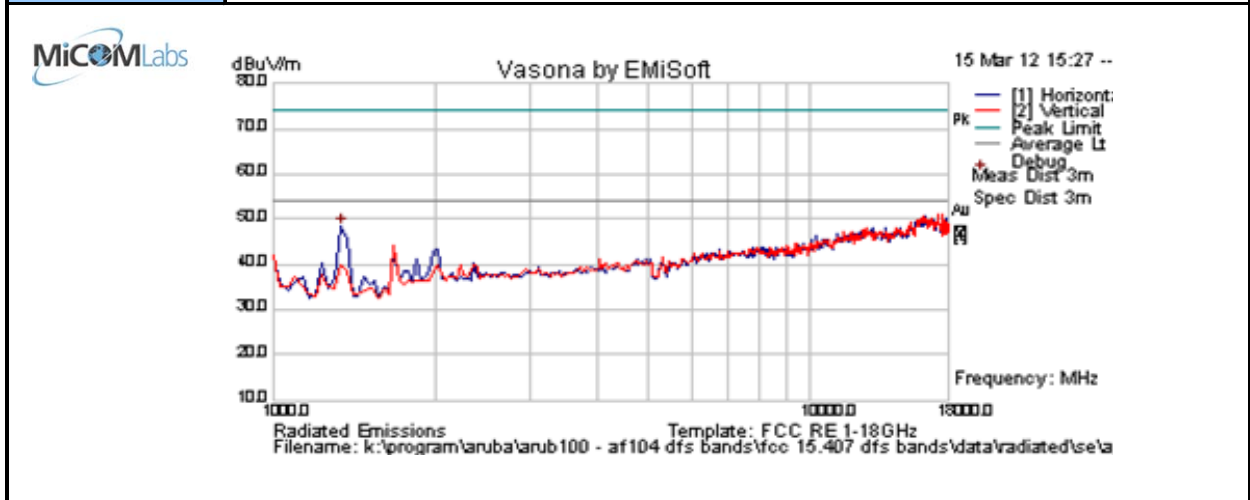

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
1340.681	59.88	2.25	-13.88	48.26	Peak [Scan]	H	100	0	54	-5.74	Pass	

Legend: RB = Restricted Band; NRB = Non-Restricted Band; FUND = Fundamental Freq.
 BE = Emission in Restricted Band Nearest Transmission Band Edge;


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 162 of 186

Date	Thursday, March 15, 2012	Tracker #	ARUB100
Lab. Notes			
Lab. Notes			

Test Freq.	5320 MHz	Engineer	SB
Variant	Receive in Test Utility	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	Not Applicable in Receive Mode	Press. (mBars)	1003
Antenna	ANT 18		
Test Notes 1			
Test Notes 2			

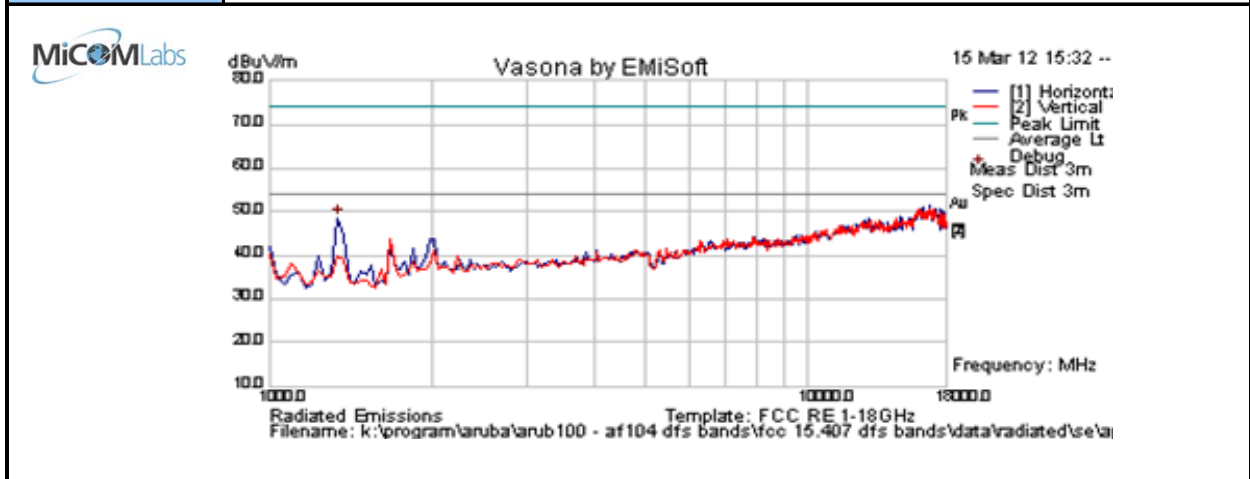

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
1340.681	60.2	2.3	-13.9	48.6	Peak [Scan]	H	100	0	54	-5.4	Pass	

Legend: RB = Restricted Band; NRB = Non-Restricted Band; FUND = Fundamental Freq.
 BE = Emission in Restricted Band Nearest Transmission Band Edge;

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 163 of 186

AP-ANT-18

802.11a/n HT-20/ n HT-20
5.470-5.725 GHz Band

Date	Thursday, March 15, 2012	Tracker #	ARUB100
Lab. Notes			
Lab. Notes			

Test Freq.	5500 MHz	Engineer	SB
Variant	Receive in Test Utility	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	Not Applicable in Receive Mode	Press. (mBars)	1003
Antenna	ANT 18		
Test Notes 1			
Test Notes 2			

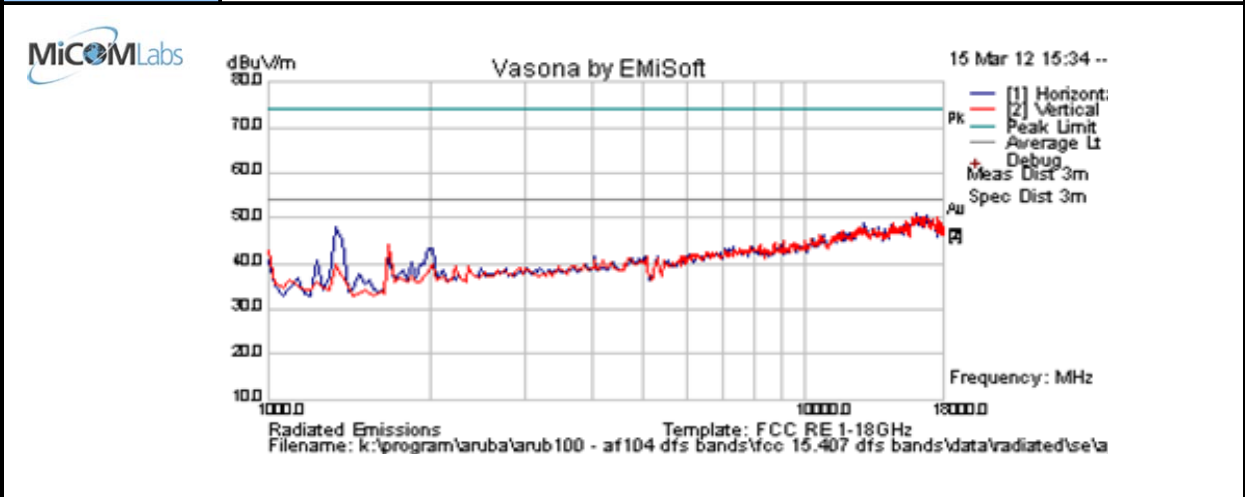

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
No Receiver Emissions Within 6dB of limit.												
Legend: RB = Restricted Band; NRB = Non-Restricted Band; FUND = Fundamental Freq. BE = Emission in Restricted Band Nearest Transmission Band Edge;												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 164 of 186

Test Freq.	5580 MHz	Engineer	SB
Variant	Receive in Test Utility	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	Not Applicable in Receive Mode	Press. (mBars)	1003
Antenna	ANT 18		
Test Notes 1			
Test Notes 2			

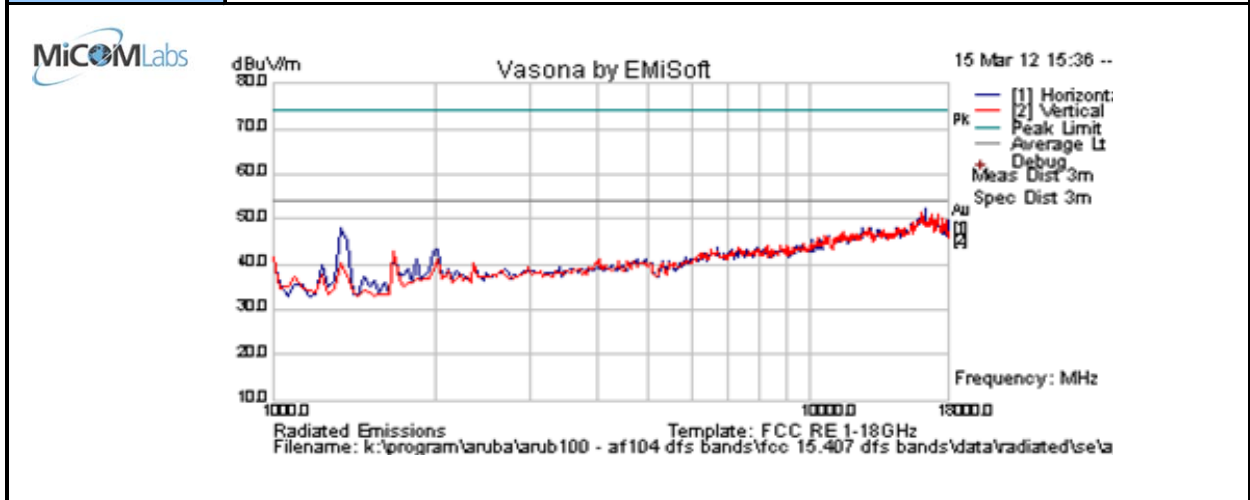

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
No Receiver Emissions Within 6dB of limit.												
Legend: RB = Restricted Band; NRB = Non-Restricted Band; FUND = Fundamental Freq. BE = Emission in Restricted Band Nearest Transmission Band Edge;												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 165 of 186

Test Freq.	5700 MHz	Engineer	SB
Variant	Receive in Test Utility	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	Not Applicable in Receive Mode	Press. (mBars)	1003
Antenna	ANT 18		
Test Notes 1			
Test Notes 2			

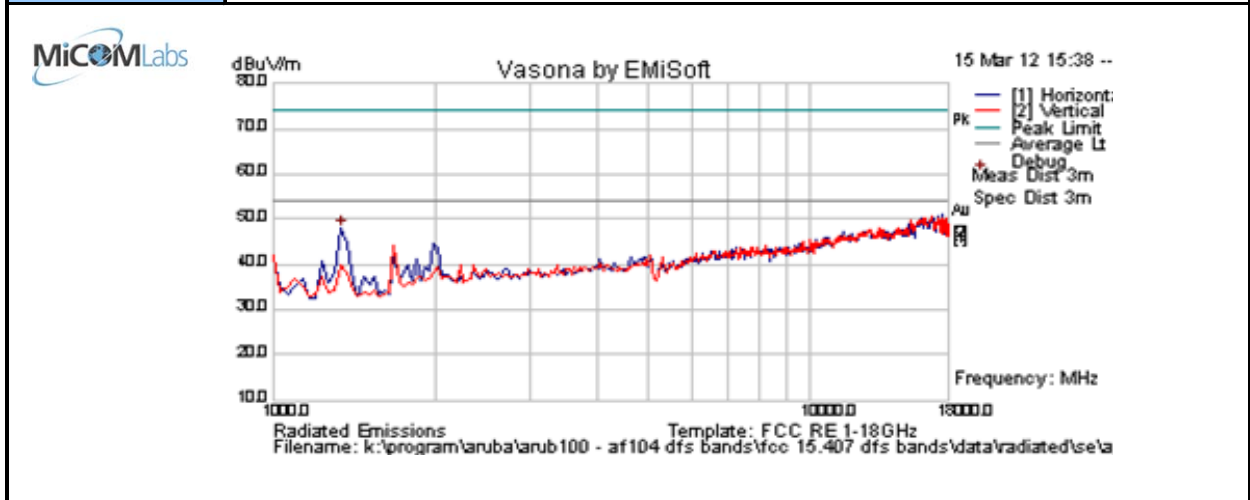

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
1340.681	59.64	2.25	-13.88	48.02	Peak [Scan]	H	100	0	54	-5.98	Pass	

Legend: RB = Restricted Band; NRB = Non-Restricted Band; FUND = Fundamental Freq.
 BE = Emission in Restricted Band Nearest Transmission Band Edge;

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 166 of 186

AP-ANT-19

802.11a/n HT-20/ n HT-20
5.250-5.350 GHz Band

Date	Thursday, March 15, 2012	Tracker #	ARUB100
Lab. Notes			
Lab. Notes			

Test Freq.	5260 MHz	Engineer	SB
Variant	Receive in Test Utility	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	Not Applicable in Receive Mode	Press. (mBars)	1003
Antenna	ANT 19		
Test Notes 1			
Test Notes 2			

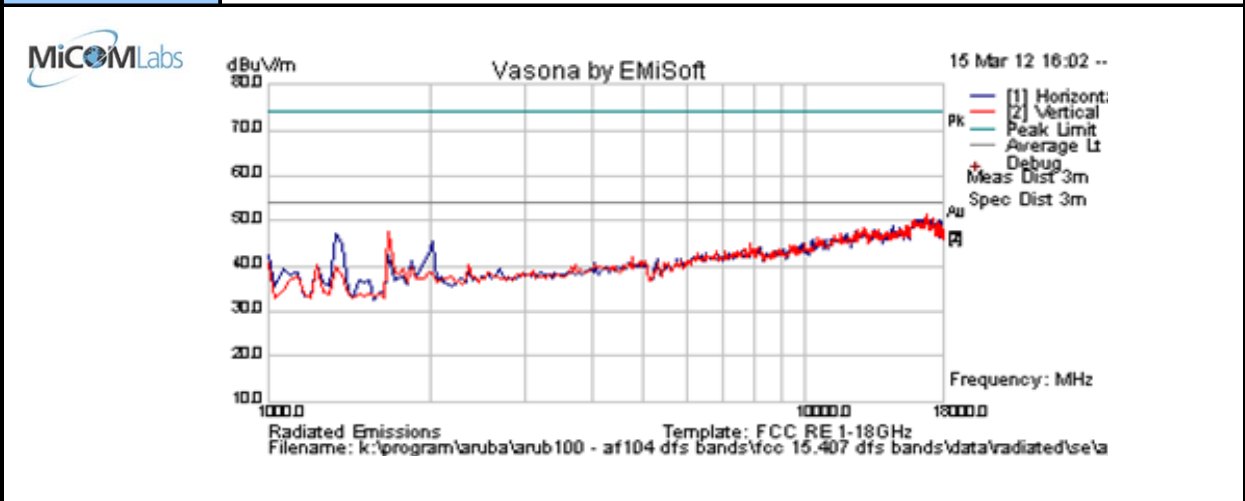

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
---------------	----------	------------	-------	--------------	------------------	-----	--------	---------	--------------	-----------	------------	----------

No Receiver Emissions Within 6dB of limit.


Legend:	RB = Restricted Band; NRB = Non-Restricted Band; FUND = Fundamental Freq. BE = Emission in Restricted Band Nearest Transmission Band Edge;
----------------	---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 167 of 186

Test Freq.	5300 MHz	Engineer	SB
Variant	Receive in Test Utility	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	Not Applicable in Receive Mode	Press. (mBars)	1003
Antenna	ANT 19		
Test Notes 1			
Test Notes 2			

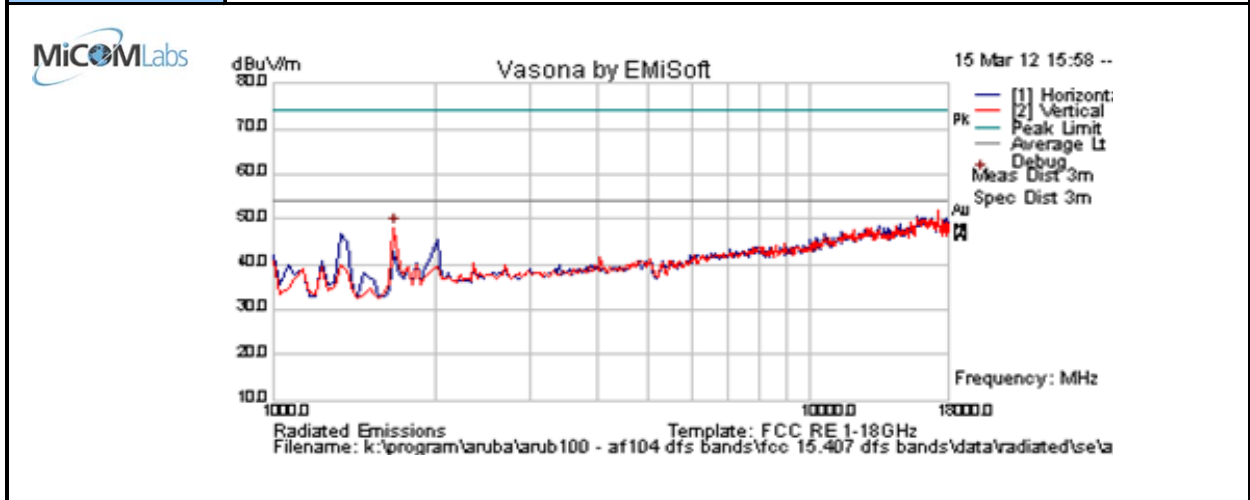

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
1681.363	59.66	2.52	-14.15	48.03	Peak [Scan]	V	100	0	54	-5.97	Pass	

Legend: RB = Restricted Band; NRB = Non-Restricted Band; FUND = Fundamental Freq.
 BE = Emission in Restricted Band Nearest Transmission Band Edge;


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 168 of 186

Date	Thursday, March 15, 2012	Tracker #	ARUB100
Lab. Notes			
Lab. Notes			

Test Freq.	5320 MHz	Engineer	SB
Variant	Receive in Test Utility	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	Not Applicable in Receive Mode	Press. (mBars)	1003
Antenna	ANT 19		
Test Notes 1			
Test Notes 2			

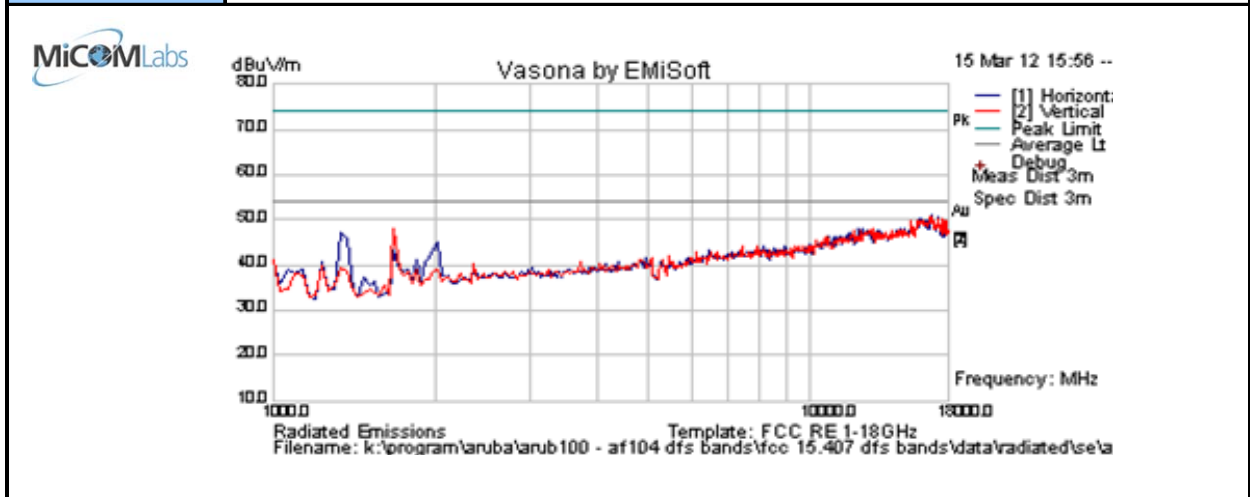

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
---------------	----------	------------	-------	--------------	------------------	-----	--------	---------	--------------	-----------	------------	----------

No Receiver Emissions Within 6dB of limit.

Legend:	RB = Restricted Band; NRB = Non-Restricted Band; FUND = Fundamental Freq.
	BE = Emission in Restricted Band Nearest Transmission Band Edge;

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 169 of 186

AP-ANT-19

**802.11a/n HT-20/ n HT-20
5.470-5.725 GHz Band**

Date	Thursday, March 15, 2012	Tracker #	ARUB100
Lab. Notes			
Lab. Notes			

Test Freq.	5500 MHz	Engineer	SB
Variant	Receive in Test Utility	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	Not Applicable in Receive Mode	Press. (mBars)	1003
Antenna	ANT 19		
Test Notes 1			
Test Notes 2			

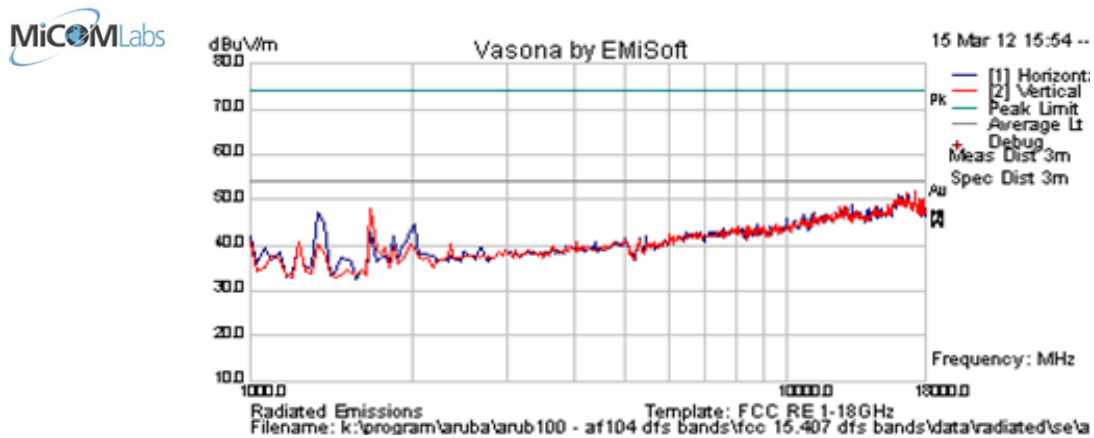

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
No Receiver Emissions Within 6dB of limit.												
Legend: RB = Restricted Band; NRB = Non-Restricted Band; FUND = Fundamental Freq.												
BE = Emission in Restricted Band Nearest Transmission Band Edge;												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 170 of 186

Test Freq.	5580 MHz	Engineer	SB
Variant	Receive in Test Utility	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	Not Applicable in Receive Mode	Press. (mBars)	1003
Antenna	ANT 19		
Test Notes 1			
Test Notes 2			

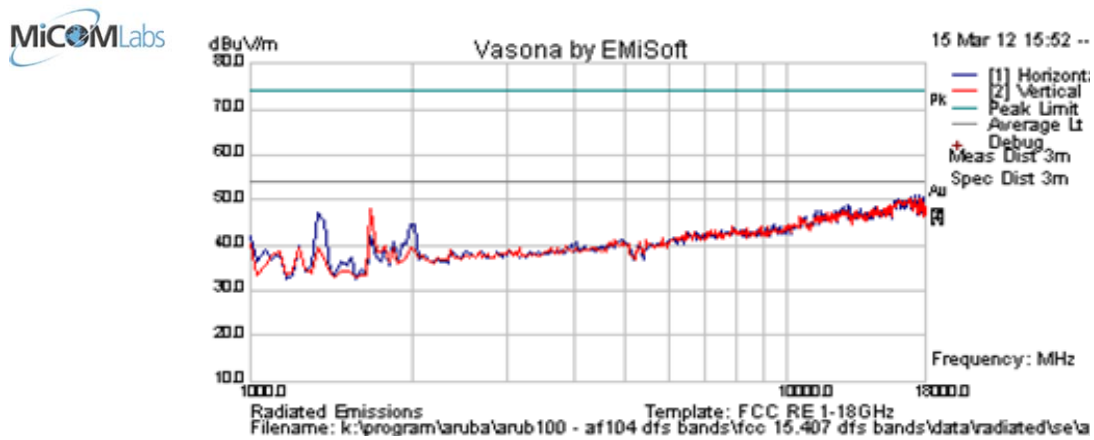

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
No Receiver Emissions Within 6dB of limit.												
Legend: RB = Restricted Band; NRB = Non-Restricted Band; FUND = Fundamental Freq.												
BE = Emission in Restricted Band Nearest Transmission Band Edge;												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 171 of 186

Test Freq.	5700 MHz	Engineer	SB
Variant	Receive in Test Utility	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	39
Power Setting	Not Applicable in Receive Mode	Press. (mBars)	1003
Antenna	ANT 19		
Test Notes 1			
Test Notes 2			

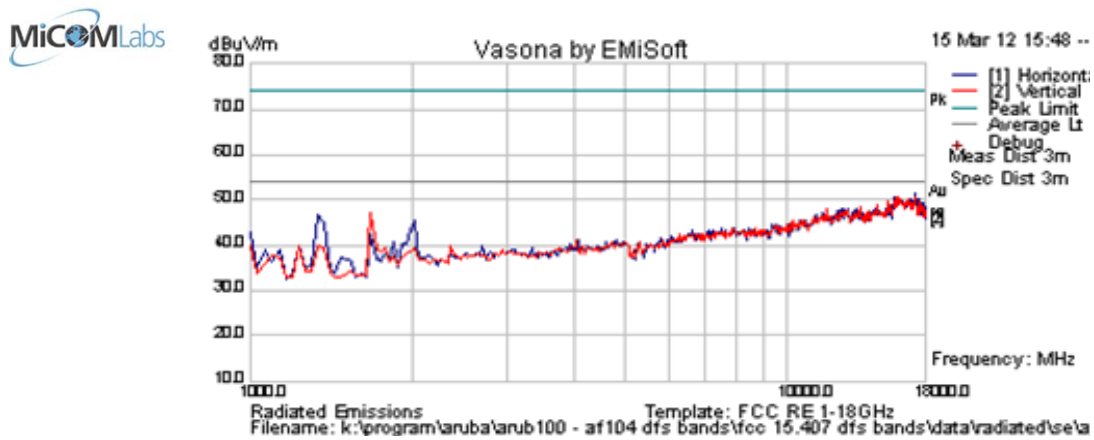

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
No Receiver Emissions Within 6dB of limit.												
Legend: RB = Restricted Band; NRB = Non-Restricted Band; FUND = Fundamental Freq.												
BE = Emission in Restricted Band Nearest Transmission Band Edge;												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 172 of 186

Specification

Receiver Radiated Spurious Emissions

Industry Canada RSS-Gen §4.10,

The search for spurious emissions shall be from the lowest frequency internally generated or used in the receiver (e.g. local oscillator, intermediate or carrier frequency), or 30 MHz, whichever is the higher, to at least 3 times the highest tunable or local oscillator frequency, whichever is the higher, without exceeding 40 GHz.

RSS-Gen §6

The following receiver spurious emission limits shall be complied with;

(a) If a radiated measurement is made, all spurious emissions shall comply with the limits of Table 1.

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.7.3. Radiated Spurious Emissions (30M-1 GHz)


FCC, Part 15 Subpart C §15.407(b)(6); §15.205(a); §15.209(a)
Industry Canada RSS-210 §2.2

Test Procedure

Preliminary radiated emissions are measured in the anechoic chamber at a 10-meter distance on every azimuth in both horizontal and vertical polarity. The emissions are recorded with a spectrum analyzer in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed. The anechoic chamber test set-up is identified in Section 6 Test Set-Up Photographs.

The EUT had two methods of powering on ac/dc converter and Power over Ethernet, Both modes were tested.

Test Measurement Set up

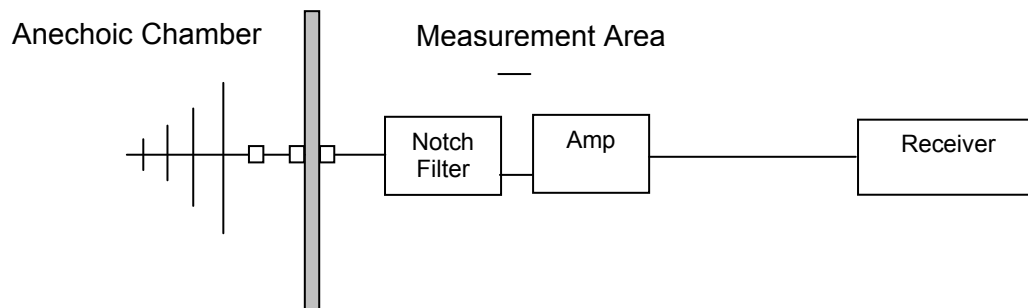

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength
R = Measured Receiver Input Amplitude
AF = Antenna Factor
CORR = Correction Factor = CL – AG + NFL
CL = Cable Loss
AG = Amplifier Gain



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 174 of 186

For example:

Given a Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu\text{V/m}))}$$

$$40 \text{ dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250\mu\text{V/m}$$

Measurement Results for Spurious Emissions (30 MHz – 1 GHz)

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

For emissions below 1 GHz the AP-105 Wireless Access Point ports were fully loaded and exercised;

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 175 of 186

TABLE OF RESULTS – POE Power Supply

12V dc Operation

Test Freq.	Channel 1 (g) + 100+ (HT-40)	Engineer	SB
Variant	Digital Emissions	Temp (°C)	21.5
Freq. Range	30 MHz - 1000 MHz	Rel. Hum.(%)	33
Power Setting	Beaconing Maximum	Press. (mBars)	1000
Antenna	System tested with 2XAP-ANT-18 + 2XAP-ANT-19;		
Test Notes 1	Ferrites changed "R150 & R189";		
Test Notes 2	Gasket on the shielding ;removed ground from shield of RJ45;110vac;15.209 Limits		

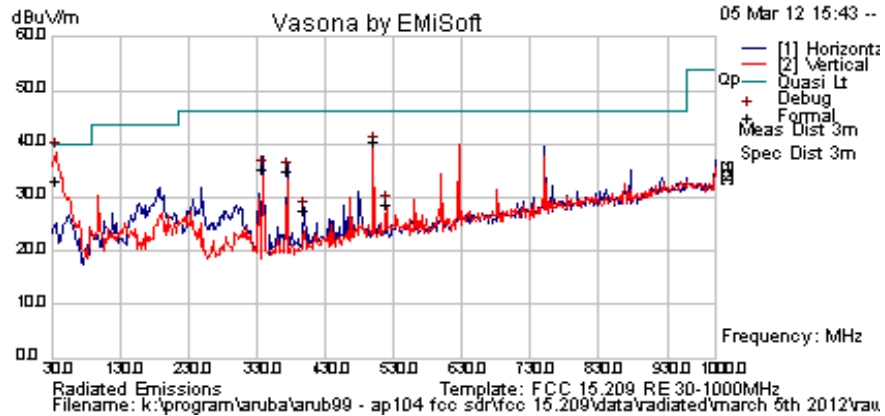

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
37.106	44.0	3.5	-14.5	33.0	Quasi Max	V	159	149	40.0	-7.0	Pass	
499.991	46.9	6.0	-12.4	40.4	Quasi Max	V	115	360	46.0	-5.6	Pass	
339.355	45.6	5.4	-15.8	35.2	Peak [Scan]	H	98	360	46.0	-10.8	Pass	
373.860	44.4	5.6	-15.0	35.0	Peak [Scan]	H	98	360	46.0	-11.0	Pass	
519.915	34.7	6.1	-12.2	28.6	Peak [Scan]	V	98	360	46.0	-17.4	Pass	
399.065	36.2	5.7	-14.4	27.5	Peak [Scan]	H	98	360	46.0	-18.5	Pass	
Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency												
NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band												


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 176 of 186

TABLE OF RESULTS – POE Power Supply

Test Freq.	Channel 1 (g) + 100+ (HT-40)	Engineer	SB
Variant	Digital Emissions	Temp (°C)	21.5
Freq. Range	30 MHz - 1000 MHz	Rel. Hum.(%)	35
Power Setting	Beaconing Maximum	Press. (mBars)	1007
Antenna	System tested with 2XAP-ANT-18 + 2XAP-ANT-19		
Test Notes 1	EUT powered via POE connected to switch; Ferrites changed "R150 & R189";		
Test Notes 2	Gasket on the shielding ;removed ground from shield of RJ45;15.209 Limits		

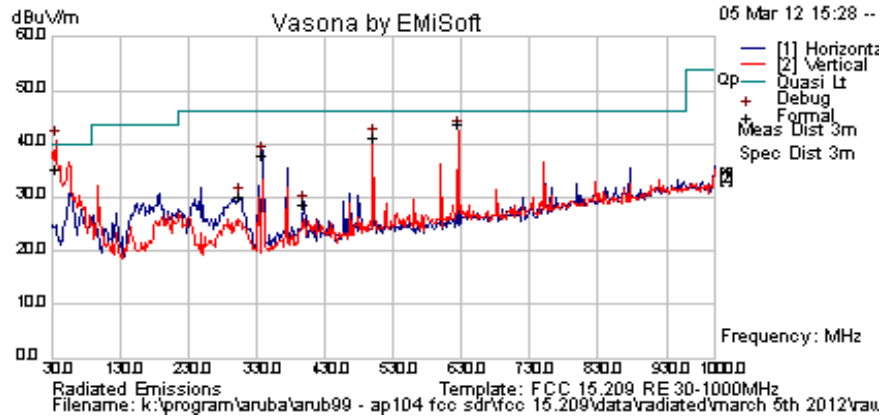

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass/Fail	Comments
37.242	46.2	3.5	-14.5	35.3	Quasi Max	V	102	161	40	-4.8	Pass	
625.000	47.8	6.5	-10.5	43.7	Quasi Max	V	105	203	46	-2.3	Pass	
500.504	42.0	6.0	-12.4	35.6	Quasi Max	H	103	52	46.0	-10.4	Pass	
339.186	48.2	5.4	-15.8	37.8	Peak [Scan]	H	105	202	46	-8.2	Pass	
304.291	41.4	5.2	-16.6	30.1	Peak [Scan]	H	105	202	46	-15.9	Pass	
399.142	37.6	5.7	-14.4	28.8	Peak [Scan]	H	105	202	46	-17.2	Pass	

Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency
 NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Specification

Limits

§15.407(b)(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.

§15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

§15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

RSS-210 §2.2 refers to Section 2.7 Table 2 below;-

Frequency(MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength ($\text{dB}\mu\text{V}/\text{m}$)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.8. AC Wireline Conducted Emissions (150 kHz – 30 MHz)


FCC, Part 15 Subpart C §15.407(b)(6)/15.207

Industry Canada RSS-Gen §7.2.2

Test Procedure

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

Test Measurement Set up

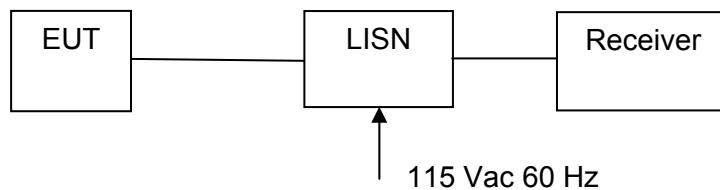


Measurement set up for AC Wireline Conducted Emissions Test



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 179 of 186

Measurement Results for AC Wireline Conducted Emissions (150 kHz – 30 MHz)

Test Freq.	N/A	Engineer	SB
Variant	AC Line Emissions	Temp (°C)	24.5
Freq. Range	0.150 MHz - 30 MHz	Rel. Hum.(%)	37
Power Setting	20	Press. (mBars)	1004
Antenna	System tested with 2XAP-ANT-18 + 2XAP-ANT-19		
Test Notes 1	AP105 board in AP104 chassis ; Ferrites changed "R150 & R189";		
Test Notes 2	Gasket on the shielding ;removed ground from shield of RJ45;110vac;		

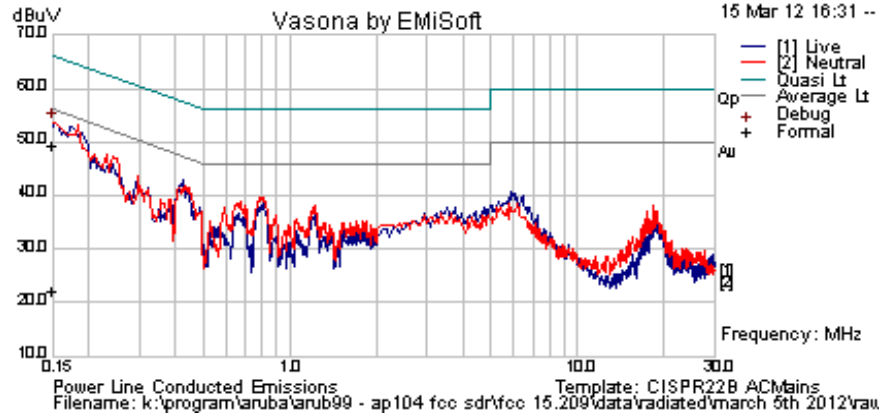

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail	Comments
0.150	39.3	9.9	0.1	49.3	Quasi Peak	Neutral	66	-16.7	Pass	
0.150	12.2	9.9	0.1	22.1	Average	Neutral	56	-33.9	Pass	

Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency
 NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Specification

Limit

§15.407 (b)(6); Any U-NII devices using an AC power line are required to comply also with the limits set forth in Section 15.207.

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu\Omega$ line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

RSS-Gen §7.2.2

The radio frequency voltage that is conducted back into the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table below. The tighter limit applies at the frequency range boundaries.

§15.207 (a) and **RSS-Gen §7.2.2** Limit Matrix

The lower limit applies at the boundary between frequency ranges

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

Laboratory Measurement Uncertainty for Conducted Emissions

Measurement uncertainty	± 2.64 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-EMC-01 'Measurement of Conducted Emissions'	0158, 0184, 0287, 0190, 0293, 0307

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


6. PHOTOGRAPHS

6.1. Radiated Emissions > 1GHz




This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.2. Radiated Emissions < 1GHz

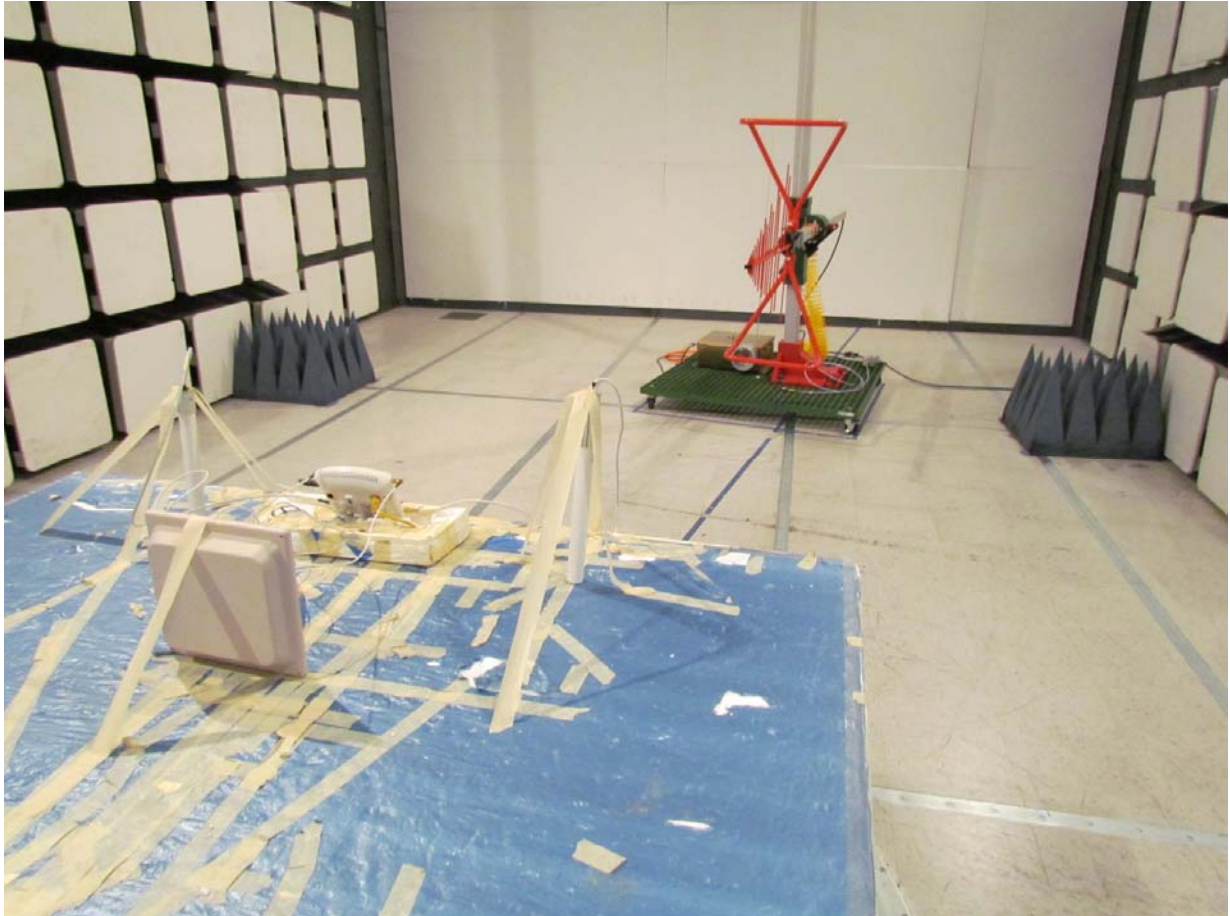

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.3. AC Wireline Conducted Emissions

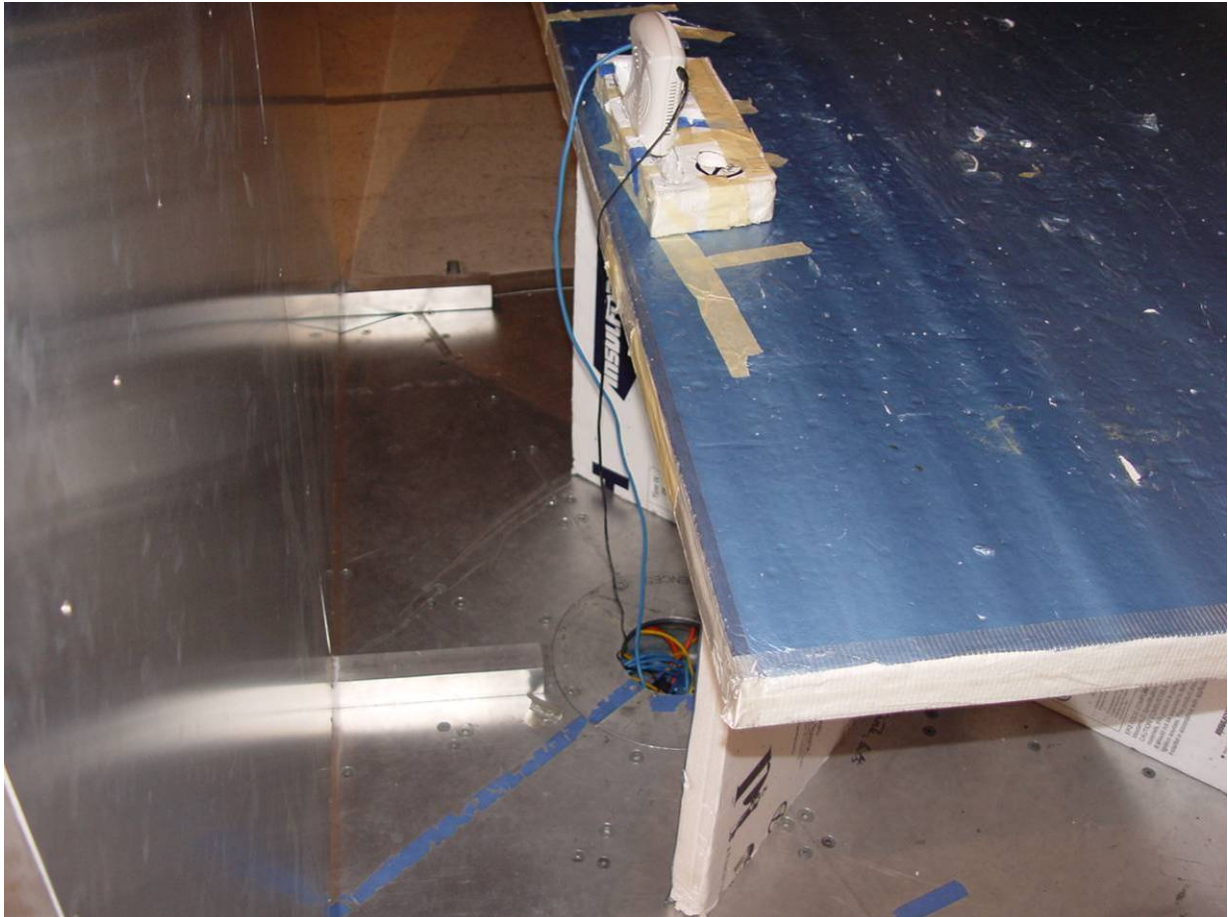

6.4. Conducted RF Measurement Test Set-Up



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-104 802.11a/b/g/n Wireless AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB100-U1 Rev A
Date: 14th June 2012
Page: 185 of 186

7. TEST EQUIPMENT DETAILS

Asset #	Instrument	Manufacturer	Part #	Serial #	Calibration Due Date
0070	Power Meter	Hewlett Packard	437B	3125U11552	28 th Nov 12
0117	Power Sensor	Hewlett Packard	8487D	3318A00371	15 th Nov 12
0223	Power Meter	Hewlett Packard	EPM-442A	US37480256	15 th Nov 12
0374	Power Sensor	Hewlett Packard	8485A	3318A19694	29 th Nov 12
0158	Barometer /Thermometer	Control Co.	4196	E2846	8 th Dec 12
0193	EMI Receiver	Rhode & Schwartz	ESI 7	838496/007	2 nd Dec 12
0287	EMI Receiver	Rhode & Schwartz	ESIB40	100201	16 th Nov 12
0338	30 - 3000 MHz Antenna	Sunol	JB3	A052907	8 th Nov 12
0335	1-18 GHz Horn Antenna	EMCO	3117	00066580	7 th Nov 12
0252	SMA Cable	Megaphase	Sucoflex 104	None	N/A
0293	BNC Cable	Megaphase	1689 1GVT4	15F50B001	N/A
0307	BNC Cable	Megaphase	1689 1GVT4	15F50B002	N/A
0310	2m SMA Cable	Micro-Coax	UFA210A-0-0787-3G03G0	209089-001	N/A
0312	3m SMA Cable	Micro-Coax	UFA210A-1-1181-3G0300	209092-001	N/A
0314	30dB N-Type Attenuator	ARRA	N9444-30	1623	N/A
0301	5.6 GHz Notch Filter	Micro-Tronics	RBC50704	001	N/A
0302	5.25 GHz Notch Filter	Micro-Tronics	BRC50703	002	N/A
0303	5.8 GHz Notch Filter	Micro-Tronics	BRC50705	003	N/A
0304	2.4GHzHz Notch Filter	Micro-Tronics	--	001	N/A

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



440 Boulder Court, Suite 200
Pleasanton, CA 94566, USA
Tel: 1.925.462.0304
Fax: 1.925.462.0306
www.micomlabs.com