

Test of Aruba AP120, AP121 802.11a/b/g/n AP

To: FCC 47 CFR Part 15.407 & IC RSS-210

Test Report Serial No.: ARUB23-A4D Rev A



TEST REPORT

FROM



Test of Aruba AP120, AP121 802.11a/b/g/n AP

to

To: FCC 47 CFR Part 15.407 & IC RSS-210

Test Report Serial No.: ARUB23-A4D Rev A

Note: this report contains data with regard to the 5,150 to 5,350 MHz, and 5,470 to 5,725 MHz operational modes of the Aruba Wireless Access Point. 2.4 and 5.8 GHz test data are reported in MiCOM Labs test report ARUB23-A2.

This report supersedes NONE

Applicant: Aruba Networks
1322 Crossman Avenue
Sunnyvale
California 94089, USA

Product Function: 802.11a/b/g/n Wireless Access Point

Copy No: pdf Issue Date: 2nd June 2008

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.

440 Boulder Court, Suite 200

Pleasanton, CA 94566 USA

Phone: +1 (925) 462-0304

Fax: +1 (925) 462-0306

www.micomlabs.com



CERTIFICATE #2381.01

MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 3 of 293

This page has been left intentionally blank



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 4 of 293

TABLE OF CONTENTS

ACCREDITATION, LISTINGS & RECOGNITION	6
1. TEST RESULT CERTIFICATE.....	9
2. REFERENCES AND MEASUREMENT UNCERTAINTY.....	10
2.1. Normative References	10
2.2. Test and Uncertainty Procedures	11
3. PRODUCT DETAILS AND TEST CONFIGURATIONS	12
3.1. Technical Details	12
3.2. Scope of Test Program	13
3.3. Equipment Model(s) and Serial Number(s)	17
3.4. Antenna Details	17
3.5. Cabling and I/O Ports	17
3.6. Test Configurations.....	18
3.7. Equipment Modifications.....	26
3.8. Deviations from the Test Standard	26
3.9. Subcontracted Testing or Third Party Data	26
4. TEST SUMMARY	27
5. TEST RESULTS	30
5.1. Device Characteristics	30
5.1.1. 26 dB and 99 % Bandwidth	30
5.1.2. Transmit Output Power.....	57
5.1.3. Peak Power Spectral Density	64
5.1.4. Peak Excursion Ratio	91
5.1.5. Frequency Stability.....	118
5.1.6. Maximum Permissible Exposure	119
5.1.7. Radiated Emissions.....	120
5.1.8. AC Wireline Conducted Emissions (150 kHz – 30 MHz).....	244

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 5 of 293

6. Dynamic Frequency Selection (DFS)	248
6.1. Test Procedure and Setup.....	248
6.1.1. <i>Interference Threshold values, Master or Client incorporating In-Service Monitoring</i>	248
6.1.2. <i>DFS Response requirement values</i>	248
6.1.3. <i>Radar Test Waveforms</i>	249
6.1.4. <i>Frequency Hopping Radar Test Waveform</i>	252
6.1.5. <i>Radar Waveform Calibration</i>	252
6.1.6. <i>Radar Waveform Calibration Plots</i>	253
6.1.7. <i>Test Set Up</i>	259
6.2. Dynamic Frequency Selection (DFS) Test Results.....	261
6.2.1. <i>UNII Detection Bandwidth</i>	261
6.2.2. <i>Initial Channel Availability Check Time</i>	264
6.2.3. <i>Radar Burst at the Beginning of the Channel Availability Check Time</i>	266
6.2.4. <i>Radar Burst at the End of the Channel Availability Check Time</i>	268
6.2.5. <i>In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period</i>	270
6.2.6. <i>Statistical Performance Check</i>	281
7. PHOTOGRAPHS	284
7.1. Radiated Emissions > 1GHz.....	284
7.2. Radiated Emissions < 1GHz with Power Convertor.....	285
7.3. Radiated Emissions < 1GHz with POE (Power Over EtherNet).....	286
7.4. AC Wireline Conducted Emissions ac/dc Convertor.....	287
7.5. AC Wireline Conducted Emissions POE.....	288
7.6. General Measurement Test Set-Up.....	289
7.7. Dynamic Frequency Selection Test Set-Up.....	290
8. TEST EQUIPMENT DETAILS	292

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 6 of 293

ACCREDITATION, LISTINGS & RECOGNITION

MiCOM Labs, Inc. an accredited laboratory complies with the international standard BS EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



THE AMERICAN ASSOCIATION FOR
LABORATORY ACCREDITATION

ACCREDITED LABORATORY

A2LA has accredited


MICOM LABS
Pleasanton, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 *General Requirements for the Competence of Testing and Calibration Laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-LAF Communiqué dated 18 June 2005).

Presented this 26th day of February 2008.



President
For the Accreditation Council
Certificate Number 2381.01
Valid to November 30, 2009



For the tests or types of tests to which this accreditation applies,
please refer to the laboratory's Electrical Scope of Accreditation.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 7 of 293

LISTINGS

MiCOM Labs test facilities are listed by the following organizations;

North America

United States of America

Federal Communications Commission (FCC) Listing #: 102167

Canada

Industry Canada (IC) Listing #:4143A-2

RECOGNITION

APEC MRA (Asia-Pacific Economic Community Mutual Recognition Agreement)

Conformity Assessment Body (CAB) – MiCOM Labs

Test data generated by MiCOM Labs is accepted in the following countries under the APEC MRA.

Country	Recognition Body	Phase	CAB Identification No.
Australia	Australian Communications and Media Authority (ACMA)	I	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	I	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	I	
Singapore	Infocomm Development Authority (IDA)	I	
Taiwan	Directorate General of Telecommunications (DGT)	I	
	Bureau of Standards, Metrology and Inspection (BSMI)	I	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 8 of 293

DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft		
Rev A	2 nd June 2008	First issue of report –A4D that includes test results for 5250-5350 MHz and 5470-5725 MHz bands including Dynamic Frequency Selection (DFS) results.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 9 of 293

1. TEST RESULT CERTIFICATE

Applicant:	Aruba Networks 1322 Crossman Avenue Sunnyvale California 94089, USA	Tested By:	MiCOM Labs, Inc. 440 Boulder Court Suite 200 Pleasanton California, 94566, USA
EUT:	Wireless Access Point	Telephone:	+1 925 462 0304
Model:	AP120, AP121	Fax:	+1 925 462 0306
S/N:	AD0001035		
Test Date(s):	7th Nov '07 to 20th May 2008	Website:	www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC 47 CFR Part 15.407 & IC RSS-210	EQUIPMENT COMPLIES


MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:


 Graeme Grieve
 Quality Manager MiCOM Labs,

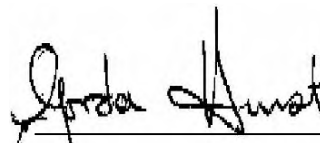
 Gordon Hurst
 President & CEO MiCOM Labs, Inc.



CERTIFICATE #2381.01

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

2. REFERENCES AND MEASUREMENT UNCERTAINTY

2.1. Normative References

Ref.	Publication	Year	Title
(i)	FCC 47 CFR Part 15.407	2007	Code of Federal Regulations
(ii)	FCC 06-96	June 2006	Memorandum Opinion and Order
(iii)	Industry Canada RSS-210	Issue 7 June 2007	Low Power License-Exempt Radiocommunication Devices (All Frequency Bands): Category 1 Equipment
(iv)	Industry Canada RSS-Gen	Issue 2 June 2007	General Requirements and Information for the Certification of Radiocommunication Equipment
(v)	ANSI C63.4	2003	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
(vi)	CISPR 22/ EN 55022	1997 1998	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
(vii)	M 3003	Edition 1 Dec. 1997	Expression of Uncertainty and Confidence in Measurements
(viii)	LAB34	Edition 1 Aug 2002	The expression of uncertainty in EMC Testing
(ix)	ETSI TR 100 028	2001	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
(x)	A2LA	14 th September 2005	Reference to A2LA Accreditation Status – A2LA Advertising Policy
(xi)	FCC Public Notice – DA 02-2138	2002	Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 11 of 293

2.2. Test and Uncertainty Procedures

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 12 of 293

3. PRODUCT DETAILS AND TEST CONFIGURATIONS

3.1. Technical Details

Details	Description
Purpose:	Test of the Aruba AP120, AP121 802.11a/b/g/n AP in the frequency ranges 5150 to 5350 MHz, and 5470 to 5,725 MHz to FCC Part 15.407 and Industry Canada RSS-210 regulations.
Applicant:	Aruba Networks 1322 Crossman Avenue Sunnyvale California 94089, USA
Manufacturer:	As applicant
Laboratory performing the tests:	MiCOM Labs, Inc. 440 Boulder Court, Suite 200 Pleasanton, California 94566 USA
Test report reference number:	ARUB23-A4D Rev A
Date EUT received:	10 th November 2007
Standard(s) applied:	FCC 47 CFR Part 15.407 & IC RSS-210
Dates of test (from - to):	7th Nov '07 to 20th May 2008
No of Units Tested:	2
Type of Equipment:	802.11a/b/g/n Wireless Access Point, 3x3 Spatial Multiplexing MIMO configuration
Applicants Trade Name:	Wireless Access Point
Model(s):	AP120 (external) and AP121 (integral) antenna
Software Release	3.3.2.0
Hardware Release:	8.0
Location for use:	Indoor
Declared Frequency Range(s):	5,150 to 5,350 MHz 5,470 to 5,725 MHz
Type of Modulation:	Per 802.11 –CCK, BPSK, QPSK, DSSS, OFDM
Declared Nominal Output Power: (Average Power)	802.11a: Legacy +17 dBm 802.11n: HT-20 +19 dBm 802.11n: HT-40 +19 dBm
EUT Modes of Operation:	Legacy 802.11a/b/g, 802.11n MT-20, MT-40
Transmit/Receive Operation:	Time Division Duplex
Rated Input Voltage and Current:	5 Vdc, 2.5 A POE 48 Vdc 350 mA
Operating Temperature Range:	Declared range 0 to +40°C
ITU Emission Designator:	802.11a Legacy 16M7W7D 802.11n HT-20 17M8W7D 802.11n HT-40 37M4W7D
Frequency Stability:	±20 ppm max
Equipment Dimensions:	Antenna Retracted (4.9 "x 5.13" x2.0"
Weight:	15oz (420 grams)
Primary function of equipment:	Wireless Access Point for transmitting data and voice

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 13 of 293

3.2. Scope of Test Program

RF Testing

The scope of the compliance program was to test the Aruba AP120 and 121 wireless Access Points, 3x3 Spatial Multiplexing MIMO configurations in the frequency range 5150 - 5250 and 5470 – 5725 MHz for compliance against FCC 47 CFR Part 15.407 and Industry Canada RSS-210 specifications including Dynamic Frequency Selection (DFS) requirements.

The Aruba Networks AP120 has external antennas with reverse SMA connectors while the AP121 has integral antenna(s). The antennas used with the AP120 and 121 are detailed in section 3.4 “Antenna Details”.

The AP120/121 is identical to Aruba Networks AP124/125 however unlike the AP124/125 this device has a single wireless chipset. The AP124/125 utilizes two identical wireless chipsets. Only 50% of the wireless printed circuit board on the AP120/121 has been populated.

Measurements were made to compare the spectral output of AP120 and AP124 access points. As a result measurements from the AP124/125 and AP120/121 have been used to generate this test report.

Dynamic Frequency Selection

The scope of the test program was to test the Aruba AP-120/121 Systems wireless access point in the frequency ranges 5,250 – 5,350 or 5,470 to 5,725 MHz as a Master device for compliance against DFS requirements of FCC 47 CFR Part 15.407 and the FCC specification Memorandum Opinion and Order FCC 06-96.

One frequency was chosen (5,500 MHz) from the operating channels of the UUT within the 5,250 – 5,350 MHz and 5,470 – 5,725 MHz bands for DFS testing per the requirements of FCC specification “Memorandum Opinion and Order FCC 06-96”, Section 7.8 “DFS Conformance Test Procedures”.


U-NII devices operating in the 5,250 – 5,350 MHz and 5,470 - 5,725 MHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

The Aruba AP-120/121 product operates as a Master device with full radar detection and Dynamic Frequency Selection (DFS) capability.

The Master device provides, on aggregate, uniform loading of the spectrum across all devices by selecting an operating channel among the available channels using a random algorithm.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

**Aruba Networks
AP-120 Wireless Access Point (Front)**

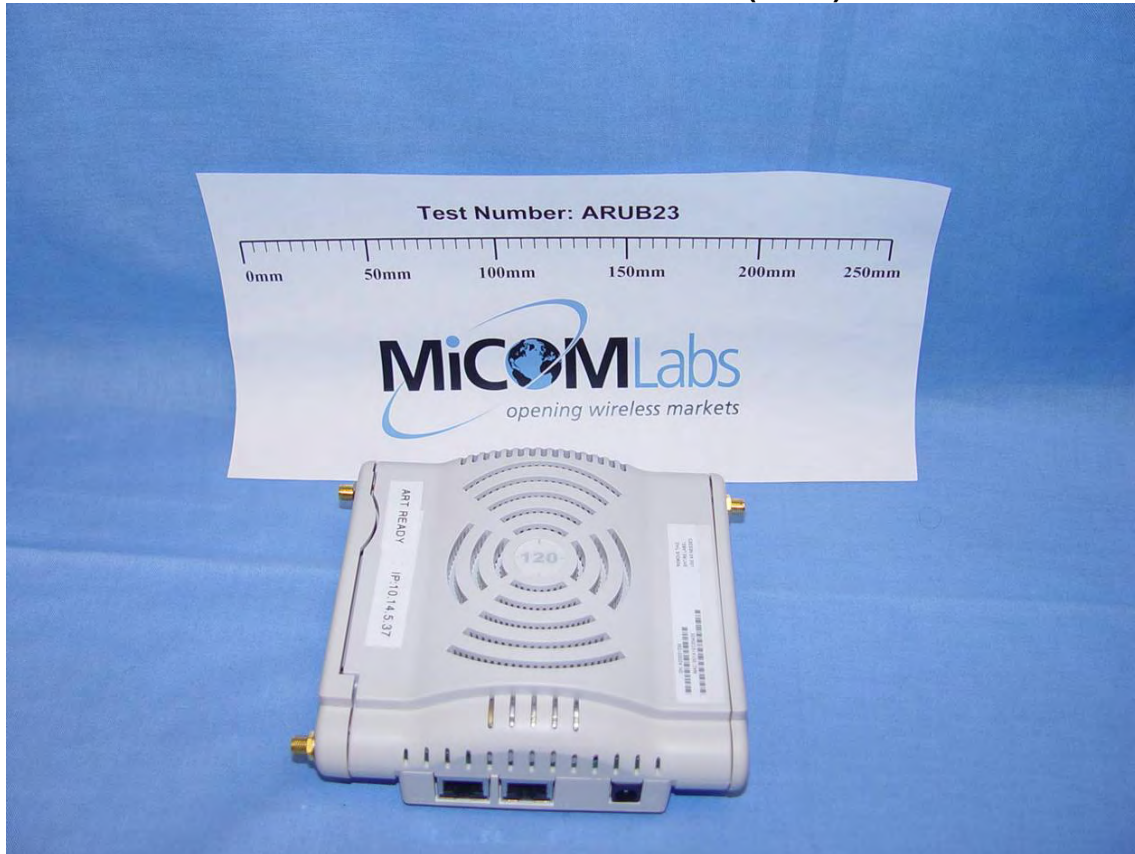

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

**Aruba Networks
Wireless Access Point (Underside)**



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

**Aruba Networks
AP121 Wireless Access Point Wireless Integral Antennas**



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 17 of 293

3.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description (Including Brand Name)	Mfr	Model No.	Serial No.
EUT	Access Point	Aruba Networks	AP120, AP121	AD0001035
Support	Power Over LAN Hub	PowerDsine	PD-6001/AC	A03176040000172
Support	Power Supply	CUI Inc	A1-15S05	
Support	Laptop PC	IBM	Thinkpad	None

Note: the AP-125 access point identified in the above table was converted to an AP-124 for spurious emission testing on integral antenna.

3.4. Antenna Details

1. 5150 – 5725 MHz
 - a. Integral
 - 5.15 GHz Gain: 7.21 dBi
 - 5.35 GHz Gain: 6.49 dBi
 - 5.725 GHz Gain: 5.23 dBi
 - b. AP-ANT-10, 6 dBi Omni-Directional
 - c. AP-ANT-12, 14 dBi Directional

3.5. Cabling and I/O Ports

Number and type of I/O ports

1. 10/100 Ethernet (non-screened) x 2
2. 5 Vdc, 4mm supply connector

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



3.6. Test Configurations

Testing was performed to determine the highest power level versus bit rate. The variant with the highest power was used to exercise the product.

Matrix of test configurations

Operational Mode(s) (802.11)	Variant	Data Rates with Highest Power	Frequencies (MHz)
a,n	Legacy	6 MBit/s	5,180
	HT-20	6.5 MCS	5,200
			5,240
HT-40	13.5 MCS	5,190 5,230	
a,n	Legacy	6 ¹ MBit/s	5,260
	HT-20	6.5 MCS	5,300
			5,320
HT-40	13.5 MCS	5,270 5,310	
a,n	Legacy	6 ¹ MBit/s	5,500
	HT-20	6.5 MCS	5,600
			5,700
HT-40	13.5 MCS	5,510 5,620 5,690	

¹ – Except for DFS these data rates were used to test and exercise the EUT at all times



Conducted Testing

Conducted test parameters were performed on a single antenna connector. The performance testing was carried out on the transmitter port exhibiting the highest output power. A table of output power V's antenna port for each operational mode is provided below. The power from each transmitter is provided together with the aggregate power for all three transmitters. Complete characterization for each chain has been provided only for the power settings utilized in the generation of this report. Aggregate power measurements are provided for all power settings.

Channel 5,180 MHz

Configuration	ART Power Setting	Tx 1 Measured Pwr (dBm)	Tx 2 Measured Pwr (dBm)	Tx 3 Measured Pwr (dBm)	Aggregate Measured Pwr (dBm)
Legacy a	5				8.4
	6				9.29
	7				10.33
	8				11.36
	9				12.33
	10				13.49
	11				14.45
	12				15.51
	13	10.93	10.82	11.52	16.4
	14	11.83	11.74	12.61	17.3
	15				18.21
	16	13.70	13.65	14.56	19.27
	17				20.2
	18				21.2
19				22.4	
HT-20	5				
	6				8.32
	7				9.24
	8				10.35
	9				11.39
	10				12.48
	11				13.43
	12				14.4
	13	10.92	10.71	11.44	15.51
	14				16.41
	15				17.28
	16				18.26
	16.5	14.02	13.82	14.80	18.75
	17				19.31
18				20	
19				21.4	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 20 of 293

Channel 5,190 MHz

Configuration	ART Power Setting	Tx 1 Measured Pwr (dBm)	Tx 2 Measured Pwr (dBm)	Tx 3 Measured Pwr (dBm)	Aggregate Measured Pwr (dBm)
HT-40 (5.190 GHz)	5				8.17
	6				9.04
	7	4.55	4.66	5.96	10.2
	8				11.22
	9				12.26
	10	7.38	7.38	8.35	12.91
	11				14
	12				15.05
	13	10.27	10.53	10.90	16.04
	14				16.95
	15				17.92
	16				18.97
	17				19.98
	18				20.96
19				22.09	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 21 of 293

Channel 5,200 MHz

Configuration	ART Power Setting	Tx 1 Measured Pwr (dBm)	Tx 2 Measured Pwr (dBm)	Tx 3 Measured Pwr (dBm)	Aggregate Measured Pwr (dBm)
Legacy a	5				8.25
	6				9.17
	7				10.27
	8				11.24
	9				12.35
	10				13.07
	11				14
	12				15.07
	13				16.1
	14				17.03
	15				18.11
	16				19.16
	17				19.96
18				21.09	
19				22.08	
HT-20	5				
	6				8.2
	7				9.14
	8				10.22
	9				11.32
	10				12.35
	11				13.03
	12				13.99
	13				15.02
	14				16.08
	15				16.98
	16				17.98
	17				19
18				20.2	
19				21.02	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 22 of 293

Channel 5,240 MHz

Configuration	ART Power Setting	Tx 1 Measured Pwr (dBm)	Tx 2 Measured Pwr (dBm)	Tx 3 Measured Pwr (dBm)	Aggregate Measured Pwr (dBm)
Legacy a	5				8.3
	6				9.22
	7				10.26
	8				11.41
	9				12.42
	10				12.75
	11				13.75
	12				14.84
	13				15.96
	14				16.83
	15				17.87
	16				18.92
	17				19.76
18				20.85	
19				21.66	
HT-20	5				
	6				8.15
	7				8.96
	8				10.2
	9				11.3
	10				12.3
	11				12.65
	12				13.65
	13				14.57
	14				15.83
	15				16.77
	16				17.72
	17				18.87
18				19.67	
19				20.65	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 23 of 293

Channel 5,230 MHz

Configuration	ART Power Setting	Tx 1 Measured Pwr (dBm)	Tx 2 Measured Pwr (dBm)	Tx 3 Measured Pwr (dBm)	Aggregate Measured Pwr (dBm)
HT-40 (5.230 GHz)	5				8.25
	6				9.17
	7				8.34
	8				9.24
	9				10.36
	10				11.23
	11				12.2
	12				12.96
	13				13.86
	14				14.82
	15				15.7
	16				16.67
	17				17.62
	18				18.56
19				19.48	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Antenna Test Configurations for Radiated Emissions

Spurious Emission and Band-Edge Test Strategy

When testing radiated spurious emissions and band-edge three identical antennae were connected to the EUT at all times. Transmission during this test process simulated a typical installation. Results for the following configurations are provided in this report.

Legacy

AP-ANT-Int	AP-ANT-12(Direct)	AP-ANT-10
a 5180	a 5180	a 5180
a 5200	a 5200	a 5200
a 5240	a 5240	a 5240
a 5260	a 5260	a 5260
a 5300	a 5300	a 5300
a 5320	a 5320	a 5320
a 5500	a 5500	a 5500
a 5600	a 5600	a 5600
a 5700	a 5700	a 5700
BE a 5150	BE a 5150	BE a 5150
Pk a 5180	Pk a 5180	Pk a 5180
Pk a 5200	Pk a 5200	Pk a 5200
Pk a 5240	Pk a 5240	Pk a 5240
Pk a 5260	Pk a 5260	Pk a 5260
Pk a 5300	Pk a 5300	Pk a 5300
Pk a 5320	Pk a 5320	Pk a 5320
BE a 5350	BE a 5350	BE a 5350
BE a 5460	BE a 5460	BE a 5460
Pk a 5500	Pk a 5500	Pk a 5500
Pk a 5600	Pk a 5600	Pk a 5600
Pk a 5700	Pk a 5700	Pk a 5700

KEY;-

BE – Band-Edge

PK - Peak Emission



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 25 of 293

HT-20

AP-ANT-Int	AP-ANT-12(Direct)	AP-ANT-10
a 5180	a 5180	a 5180
a 5200	a 5200	a 5200
a 5240	a 5240	a 5240
a 5260	a 5260	a 5260
a 5300	a 5300	a 5300
a 5320	a 5320	a 5320
a 5500	a 5500	a 5500
a 5600	a 5600	a 5600
a 5700	a 5700	a 5700
BE a 5150	BE a 5150	BE a 5150
Pk a 5180	Pk a 5180	Pk a 5180
Pk a 5200	Pk a 5200	Pk a 5200
Pk a 5240	Pk a 5240	Pk a 5240
Pk a 5260	Pk a 5260	Pk a 5260
Pk a 5300	Pk a 5300	Pk a 5300
Pk a 5320	Pk a 5320	Pk a 5320
BE a 5350	BE a 5350	BE a 5350
BE a 5460	BE a 5460	BE a 5460
Pk a 5500	Pk a 5500	Pk a 5500
Pk a 5600	Pk a 5600	Pk a 5600
Pk a 5700	Pk a 5700	Pk a 5700

KEY;-
BE – Band-Edge
PK - Peak Emission

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 26 of 293

HT-40

AP-ANT-Int	AP-ANT-12(Direct)	AP-ANT-10
a 5190	a 5190	a 5190
a 5230	a 5230	a 5230
a 5270	a 5270	a 5270
a 5310	a 5310	a 5310
BE a 5150	BE a 5150	BE a 5150
Pk a 5190	Pk a 5190	Pk a 5190
Pk a 5230	Pk a 5230	Pk a 5230
Pk a 5270	Pk a 5270	Pk a 5270
Pk a 5310	Pk a 5310	Pk a 5310
BE a 5350	BE a 5350	BE a 5350
a 5510	a 5510	a 5510
a 5620	a 5620	a 5620
a 5690	a 5690	a 5690
BE a 5460	BE a 5460	BE a 5460
PK a 5510	PK a 5510	PK a 5510
PK a 5620	PK a 5620	PK a 5620
PK a 5690	PK a 5690	PK a 5690

KEY;-

BE – Band-Edge

PK - Peak Emission

3.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

EUT Software Power Settings - Radiated Testing

1. Reduction in output power to meet band-edge requirements was required in certain circumstances. When testing radiated spurious emissions a matrix has been included in the Radiated Emissions testing section of this report identifying the power settings for this scenario. The matrix identifies whether the reduction in power was as a result of band-edge issues or spurious emissions.

3.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. None

3.9. Subcontracted Testing or Third Party Data

1. NONE

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



4. TEST SUMMARY

List of Measurements

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407** and **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
15.407(a) A9.2(2) 4.4	26dB and 99% Emission BW	Emission bandwidth measurement	Conducted (AP120 results)	Complies	5.1.1
15.407(a) A9.2(2) 4.6	Transmit Output Power	Power Measurement	Conducted (AP120 results)	Complies	5.1.2
15.407(a) A9.2(2)	Peak Power Spectral Density	PPSD	Conducted	Complies	5.1.3
15.407(a)(6)	Peak Excursion Ratio	<13dB in any 1MHz bandwidth	Conducted	Complies	5.1.4
15.407(g) 15.31 2.1 4.5	Frequency Stability	Limits: contained within band of operation at all times.	Applicant declaration	Complies	5.1.5
15.407(f) 5.5	Radio Frequency Radiation Exposure	Exposure to radio frequency energy levels, Maximum Permissible Exposure (MPE)	Conducted	Complies	5.1.6

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 28 of 293

List of Measurements (continued)

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407** and **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
15.407(b)(2) 15.205(a) 15.209(a) 2.2 2.6 A9.3(2) 4.7	Radiated Emissions		Radiated		5.1.7
	Transmitter Radiated Spurious Emissions	Emissions above 1 GHz		Complies	5.1.7.1
	Radiated Band Edge	Band edge results		Complies	5.1.7.1
RSS-GEN 6	Receiver Radiated Spurious Emissions	Emissions above 1 GHz		Complies	5.1.7.2
15.407(b)(6) 15.205(a) 15.209(a) 2.2	Radiated Emissions	Emissions <1 GHz (30M-1 GHz)	(AP120 results)	Complies	5.1.7.3
15.407(b)(6) 15.207 7.2.2	AC Wireline Conducted Emissions 150 kHz–30 MHz	Conducted Emissions	Conducted	Complies	5.1.8

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



List of Measurements (cont'd)

Dynamic Frequency Selection (DFS)

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407(h)(2)** and **FCC Memorandum Opinion and Order FCC 06-96 (Compliance Measurement procedures for Unlicensed National Information Infrastructure devices operating in the 5250-5350 MHz and 5470-5725 MHz bands incorporating dynamic frequency selection)**.

Tests performed on AP120 Master Device

Section	Test Items	Description	Condition	Result	Test Report Section
7.8.1	Detection Bandwidth	UNII Detection Bandwidth	Conducted	Complies	6.2.1
7.8.2.1	Performance Requirements Check	Initial Channel Availability Check Time	Conducted	Complies	6.2.2
7.8.2.2		Radar Burst at the Beginning of the Channel Availability Check Time	Conducted	Complies	6.2.3
7.8.2.3		Radar Burst at the End of the Channel Availability Check Time	Conducted	Complies	6.2.4
7.8.3	In-Service Monitoring	In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period	Conducted	Complies	6.2.5
7.8.4	Radar Detection	Statistical Performance Check	Conducted	Complies	6.2.6

Note 1: Test results reported in this document relate only to the items tested

Note 2: The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

Note 3:Section 3.7 Equipment Modifications highlights the equipment modifications that were required to bring the product into compliance with the above test matrix

5. TEST RESULTS

5.1. Device Characteristics


5.1.1. 26 dB and 99 % Bandwidth

FCC, Part 15 Subpart C §15.407(a)
Industry Canada RSS-210 § A9.2(2)
Industry Canada RSS-Gen 4.4

Test Procedure

The bandwidth at 26 dB and 99 % is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

Test Measurement Set up

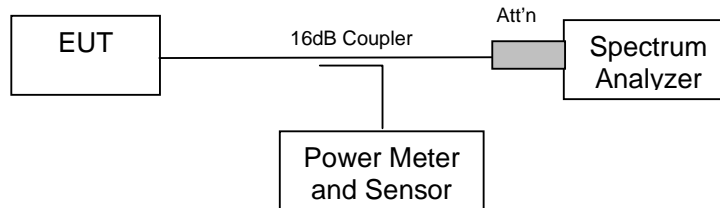

Measurement set up for 26 dB and 99 % bandwidth test

Radio Parameters
Duty Cycle: 100%
Output: Modulated Carrier
Power: Maximum Default Power



Measurement Results for 26 dB and 99 % Operational Bandwidth(s)


Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

TABLE OF RESULTS – 802.11a Legacy

Center Frequency (MHz)	26 dB Bandwidth (MHz)	99 % BW (MHz)
5,180	23.547	16.733
5,200	22.545	16.633
5,240	23.246	16.733

5,180 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

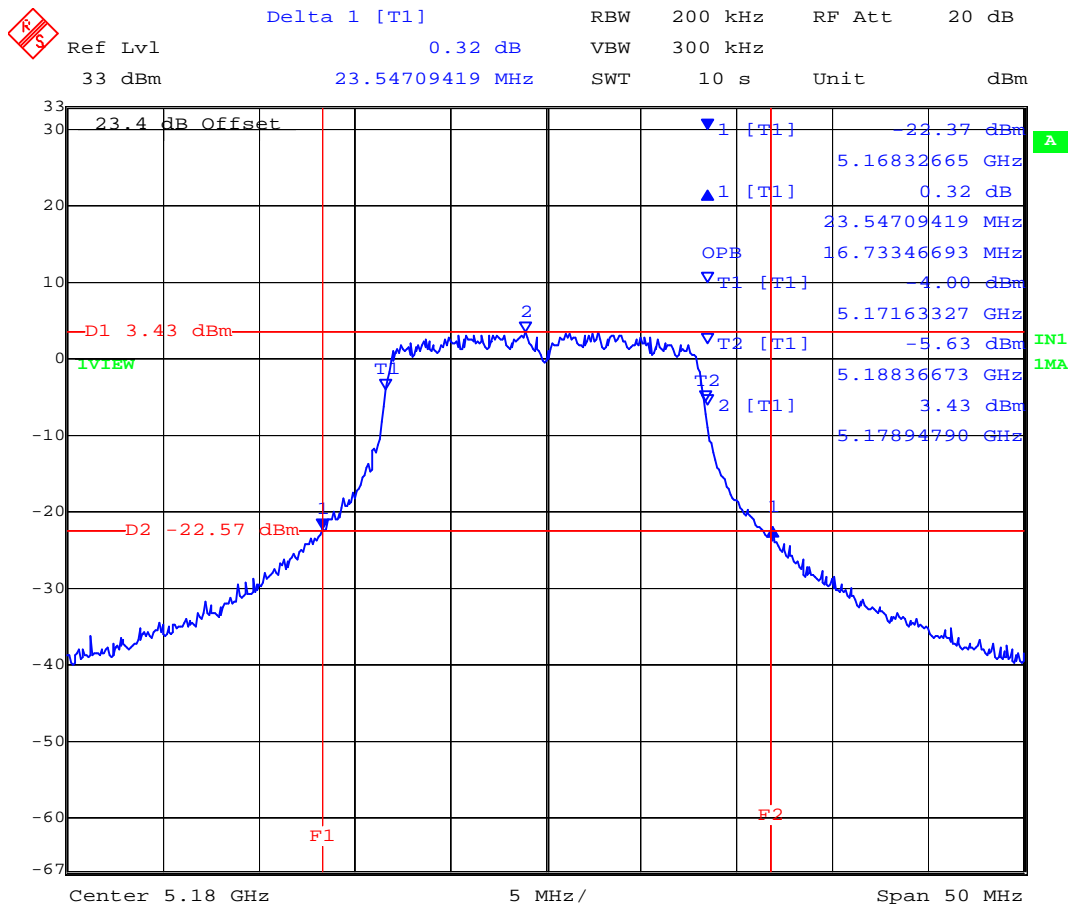

Date: 18.MAY.2008 12:31:30


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 32 of 293

5,200 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

Delta 1 [T1]
RBW 200 kHz
RF Att 20 dB
 Ref Lvl -0.20 dB VBW 300 kHz
 33 dBm 22.54509018 MHz SWT 10 s
Unit dBm

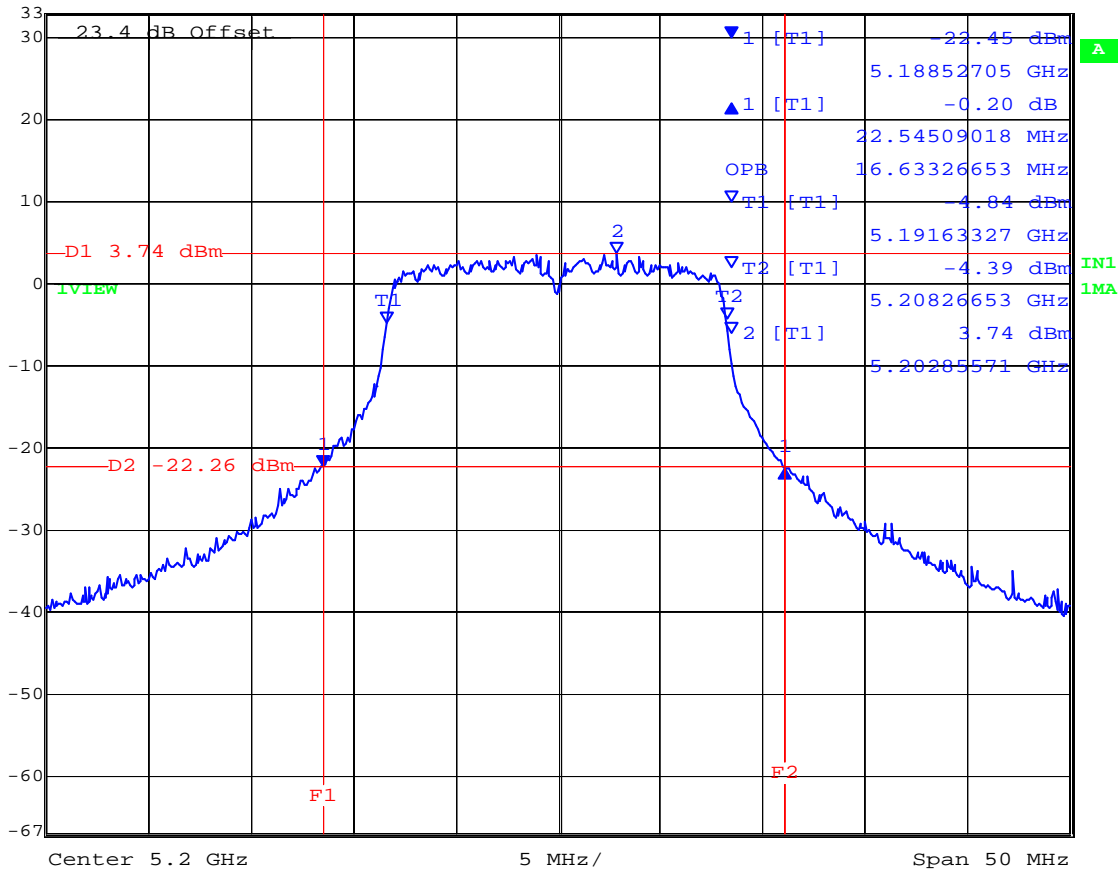


Date: 18.MAY.2008 12:35:08

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5,240 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

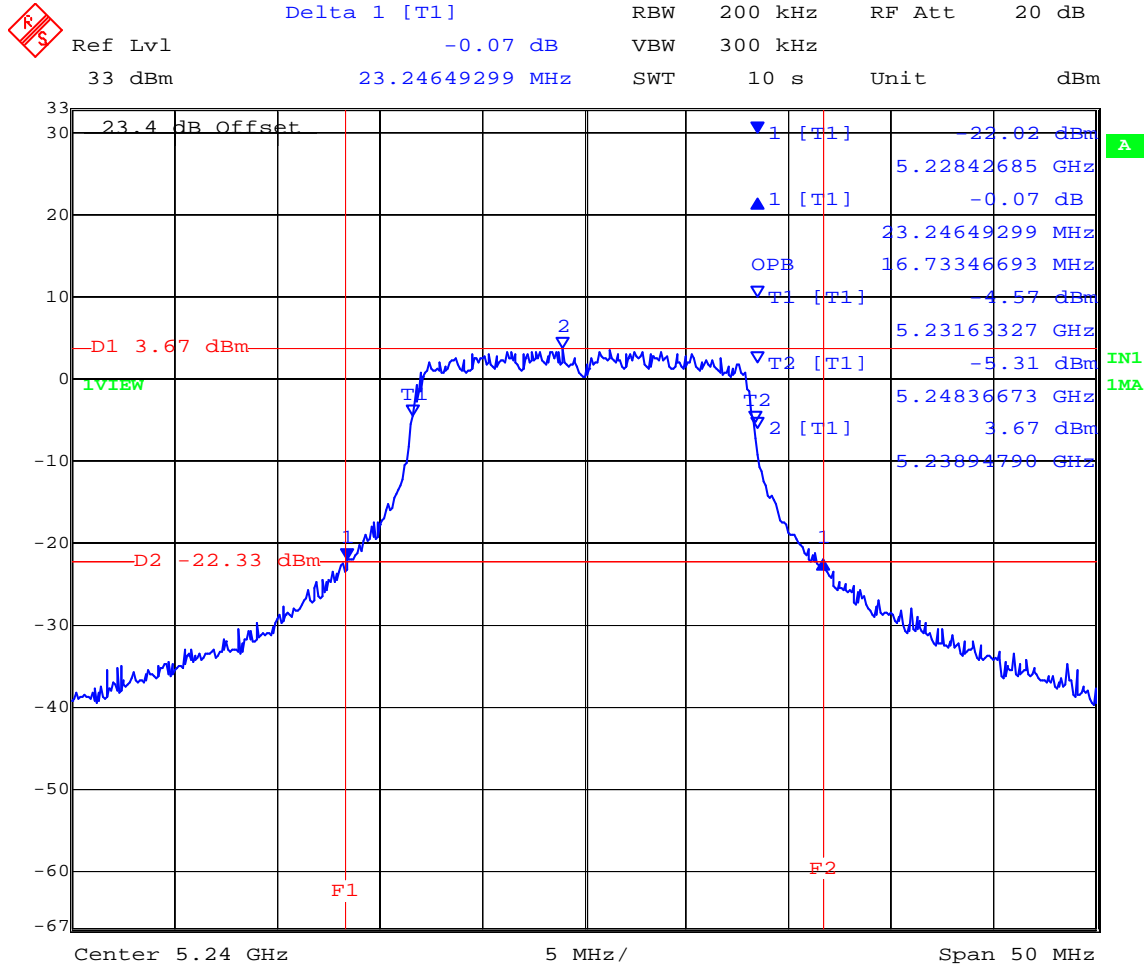

Date: 18.MAY.2008 12:37:59


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11a Legacy

Center Frequency (MHz)	26 dB Bandwidth (MHz)	99 % BW (MHz)
5,260	23.447	16.733
5,300	22.645	16.633
5,320	23.146	16.733


5,260 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

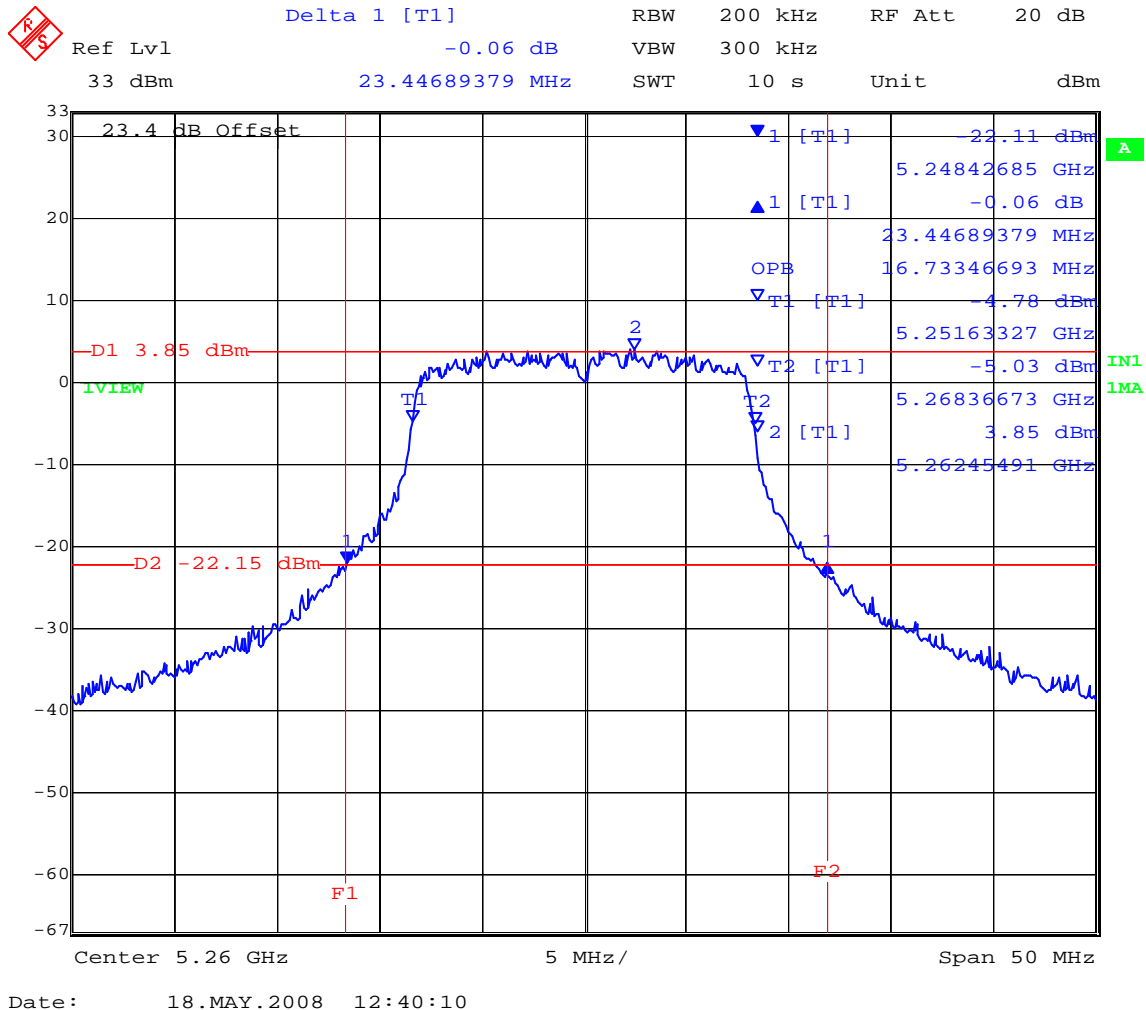

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5,300 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

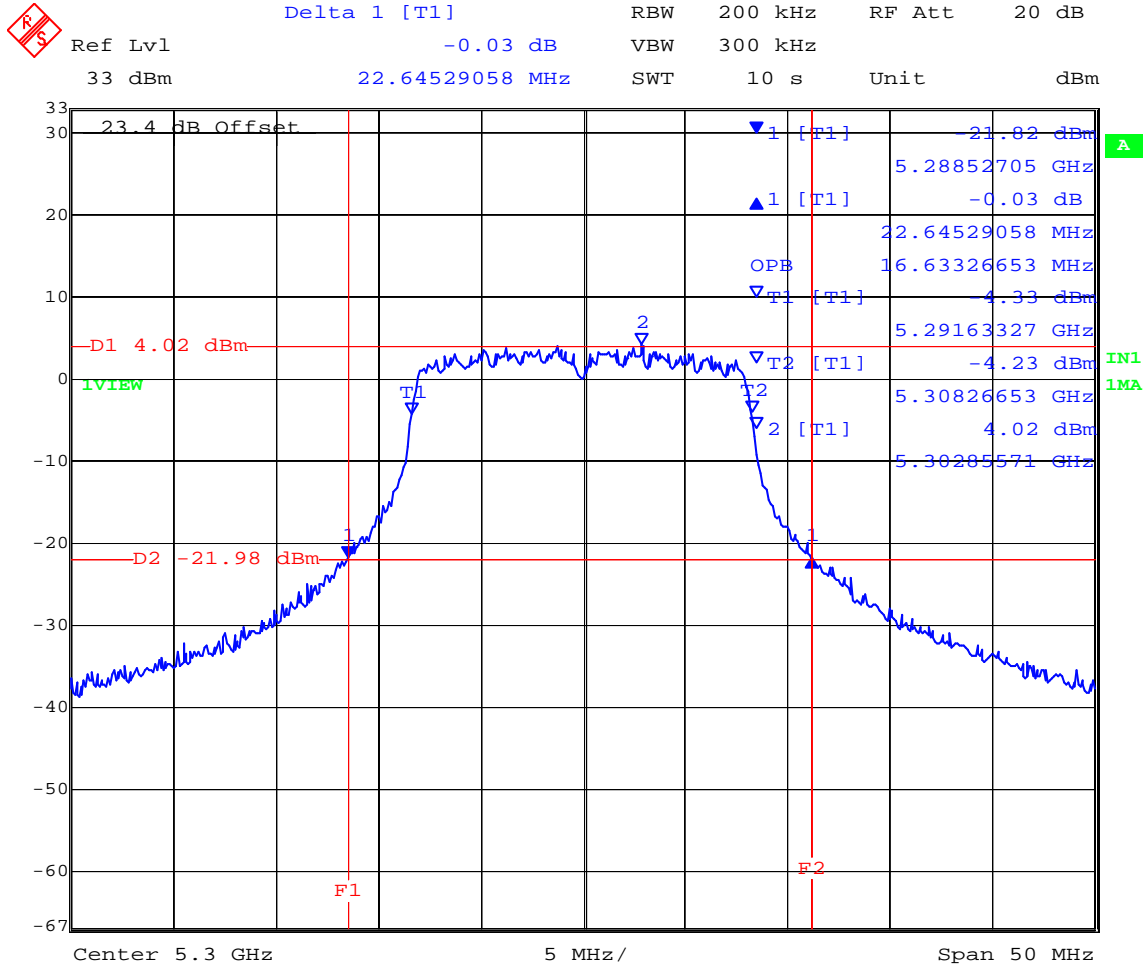

Date: 18.MAY.2008 12:42:16


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 36 of 293

5,320 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

Delta 1 [T1] RBW 200 kHz RF Att 20 dB
 Ref Lvl 0.26 dB VBW 300 kHz
 33 dBm 23.14629259 MHz SWT 10 s Unit dBm

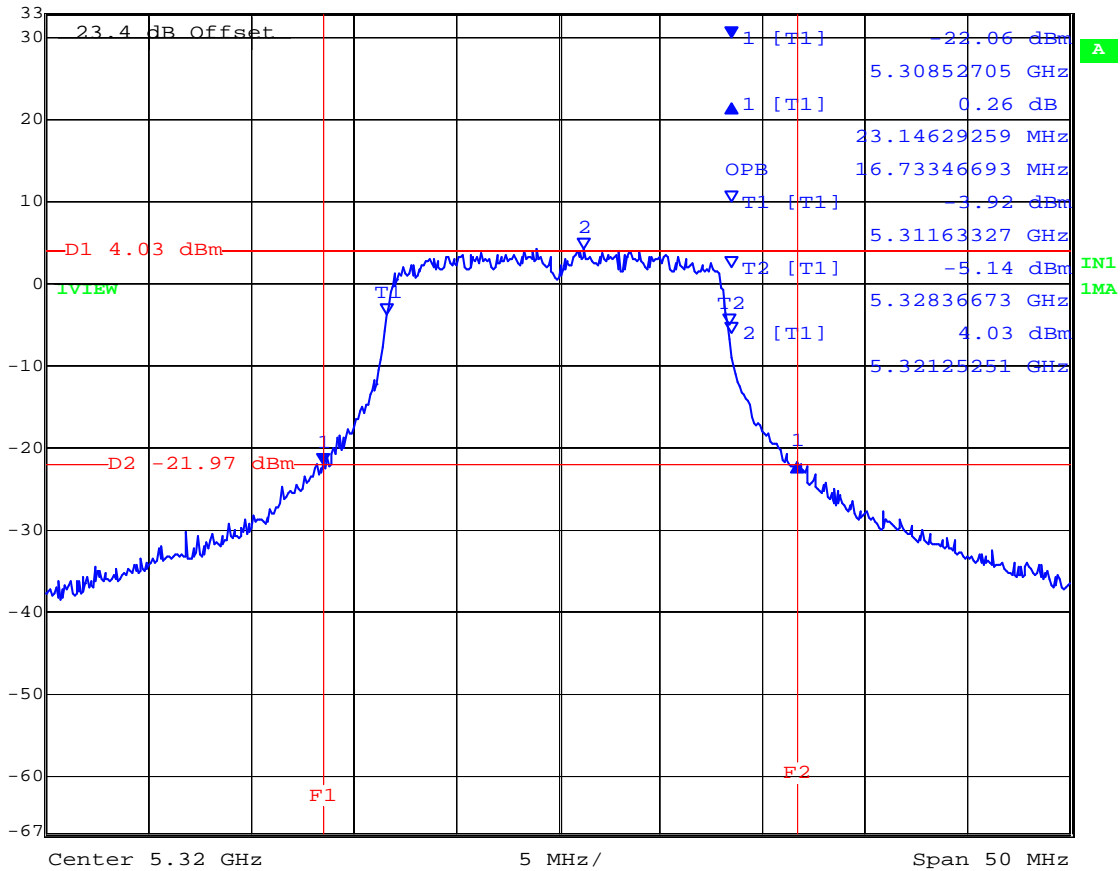

Date: 18.MAY.2008 12:44:55


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11a Legacy

Center Frequency (MHz)	26 dB Bandwidth (MHz)	99 % BW (MHz)
5,500	23.246	16.633
5,600	23.146	16.633
5,700	23.447	16.633

5,500 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

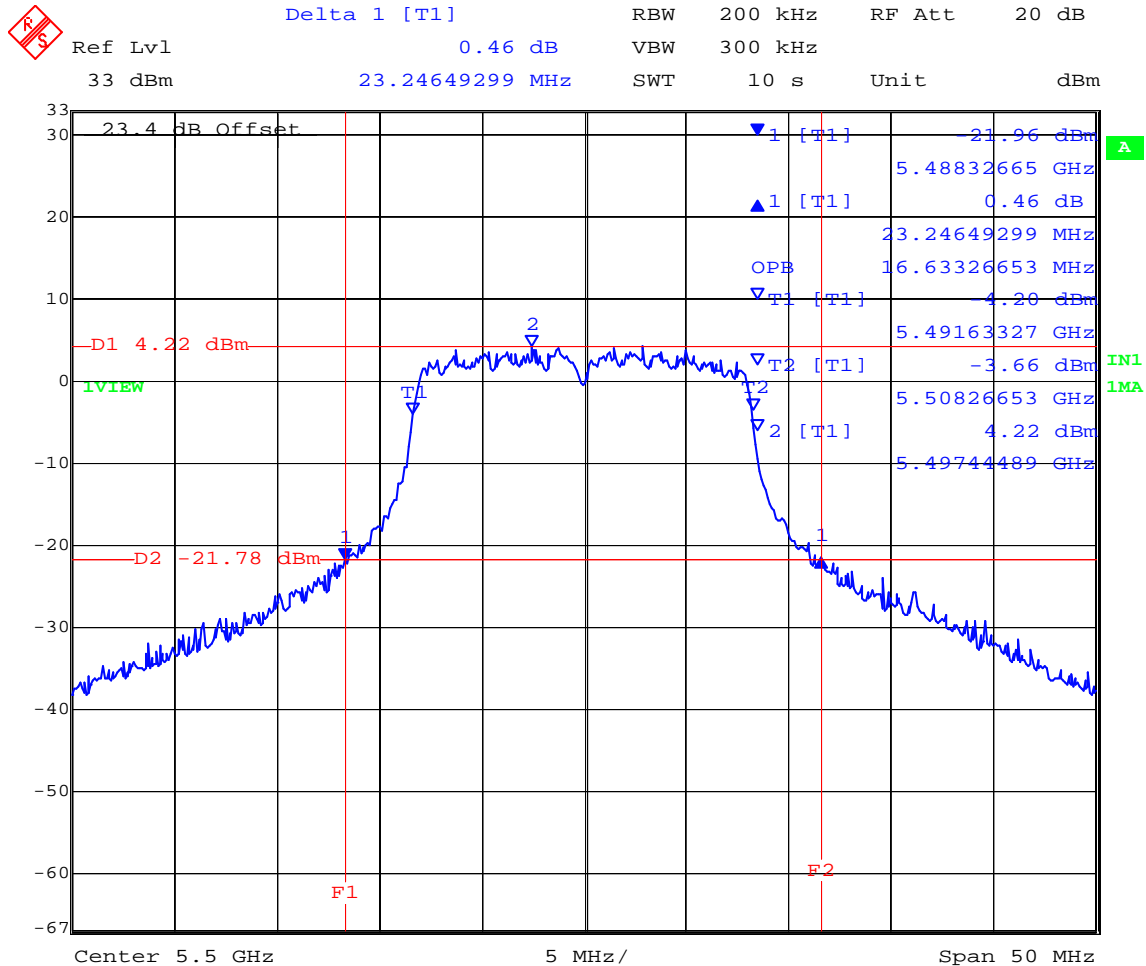

Date: 18.MAY.2008 12:50:00


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5,600 MHz 802.11a Legacy 26 dB and 99 % Bandwidth



Delta 1 [T1] RBW 200 kHz RF Att 20 dB
 Ref Lvl -0.66 dB VBW 300 kHz
 33 dBm 23.14629259 MHz SWT 10 s Unit dBm

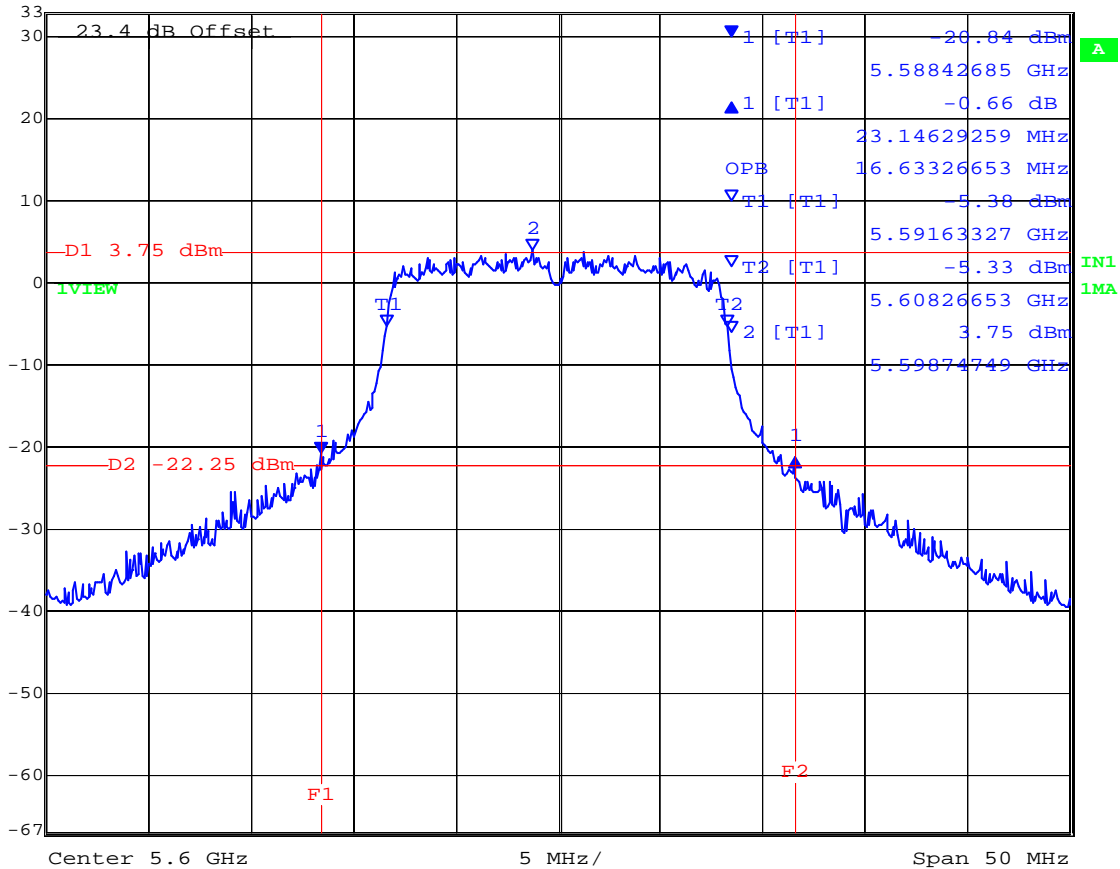

Date: 18.MAY.2008 12:51:55


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5,700 MHz 802.11a Legacy 26 dB and 99 % Bandwidth



Delta 1 [T1] RBW 200 kHz RF Att 20 dB
 Ref Lvl -0.17 dB VBW 300 kHz
 33 dBm 23.44689379 MHz SWT 10 s Unit dBm

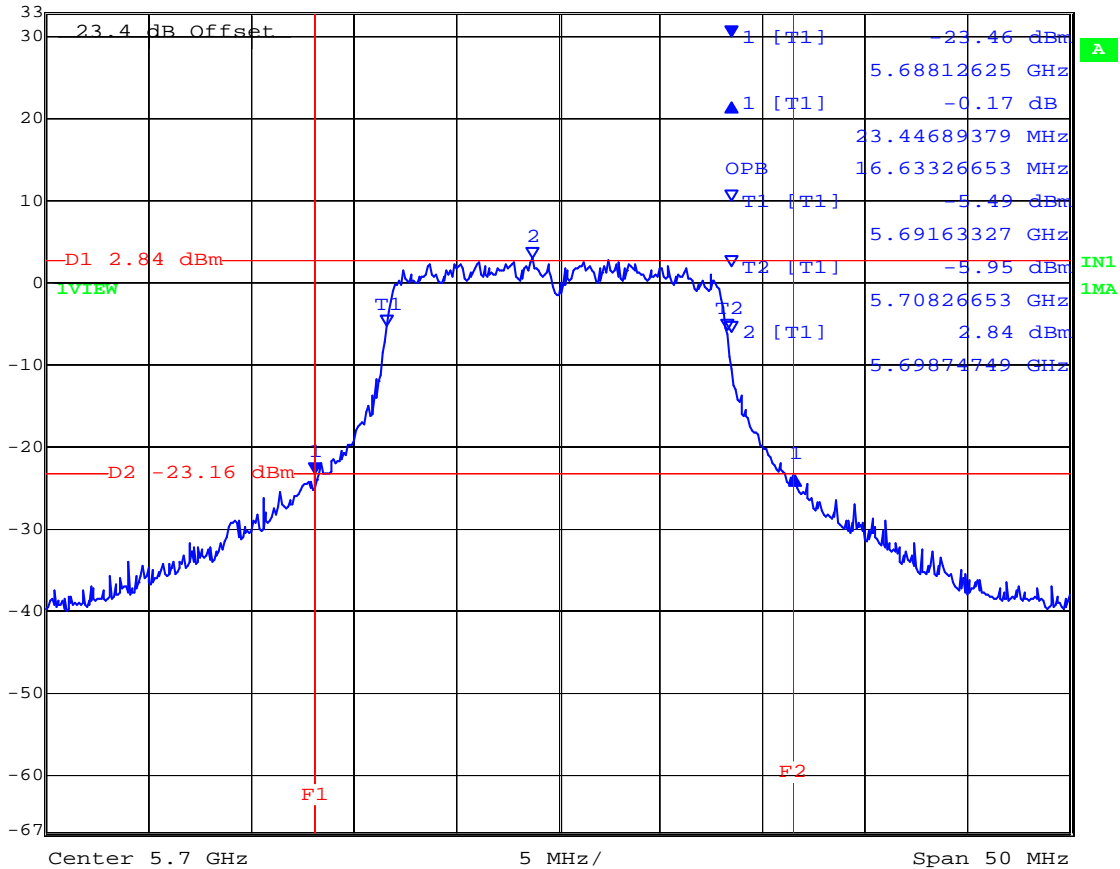

Date: 18.MAY.2008 12:53:54

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Measurement Results for 26 dB and 99 % Operational Bandwidth(s) -Continued

TABLE OF RESULTS – 802.11n HT20

Center Frequency (MHz)	26 dB Bandwidth (MHz)	99 % BW (MHz)
5,180	23.347	17.836
5,200	23.547	17.836
5,240	23.948	17.836

5,180 MHz 802.11n HT20 26 dB and 99 % Bandwidth

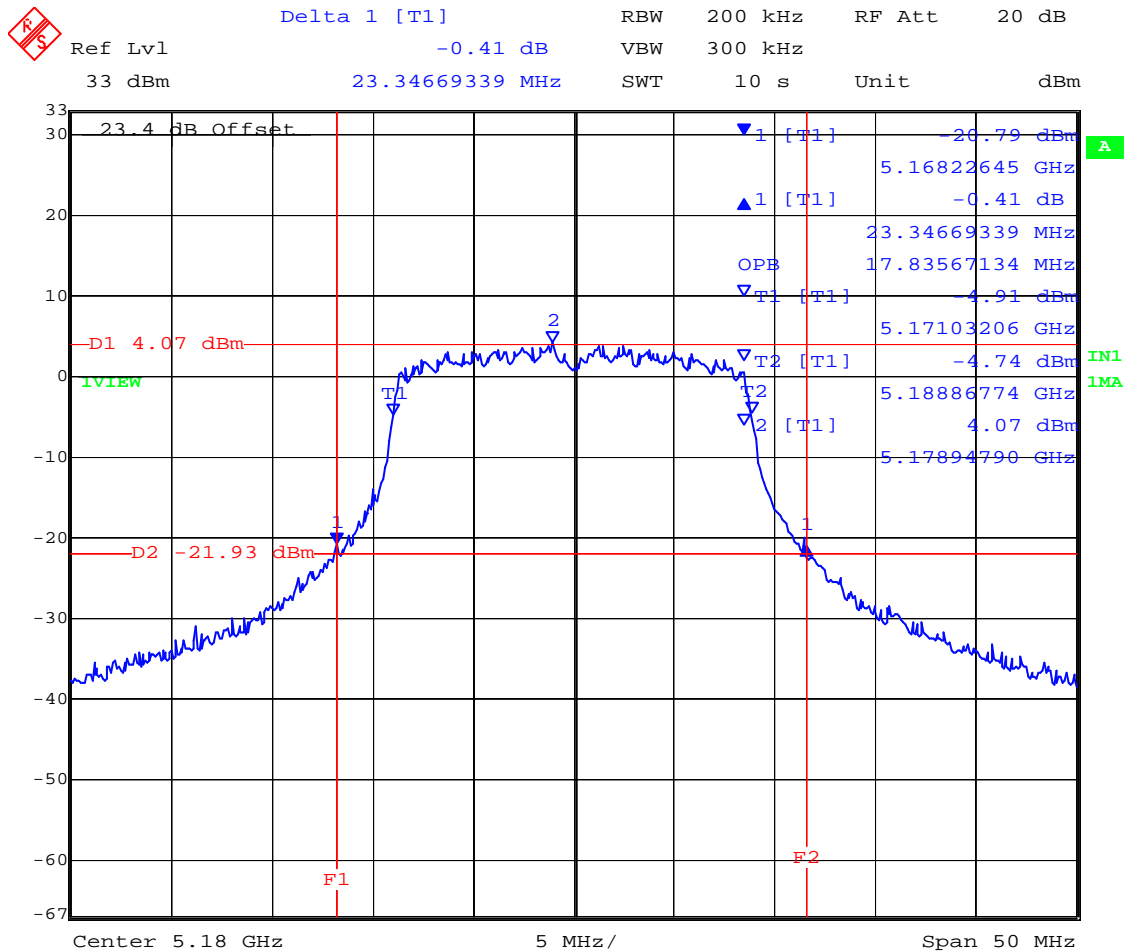

Date: 18.MAY.2008 12:56:40


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5,200 MHz 802.11n HT20 26 dB and 99 % Bandwidth



Ref Lvl	Delta 1 [T1]	RBW	200 kHz	RF Att	20 dB
33 dBm	0.45 dB	VBW	300 kHz		
	23.54709419 MHz	SWT	10 s	Unit	dBm

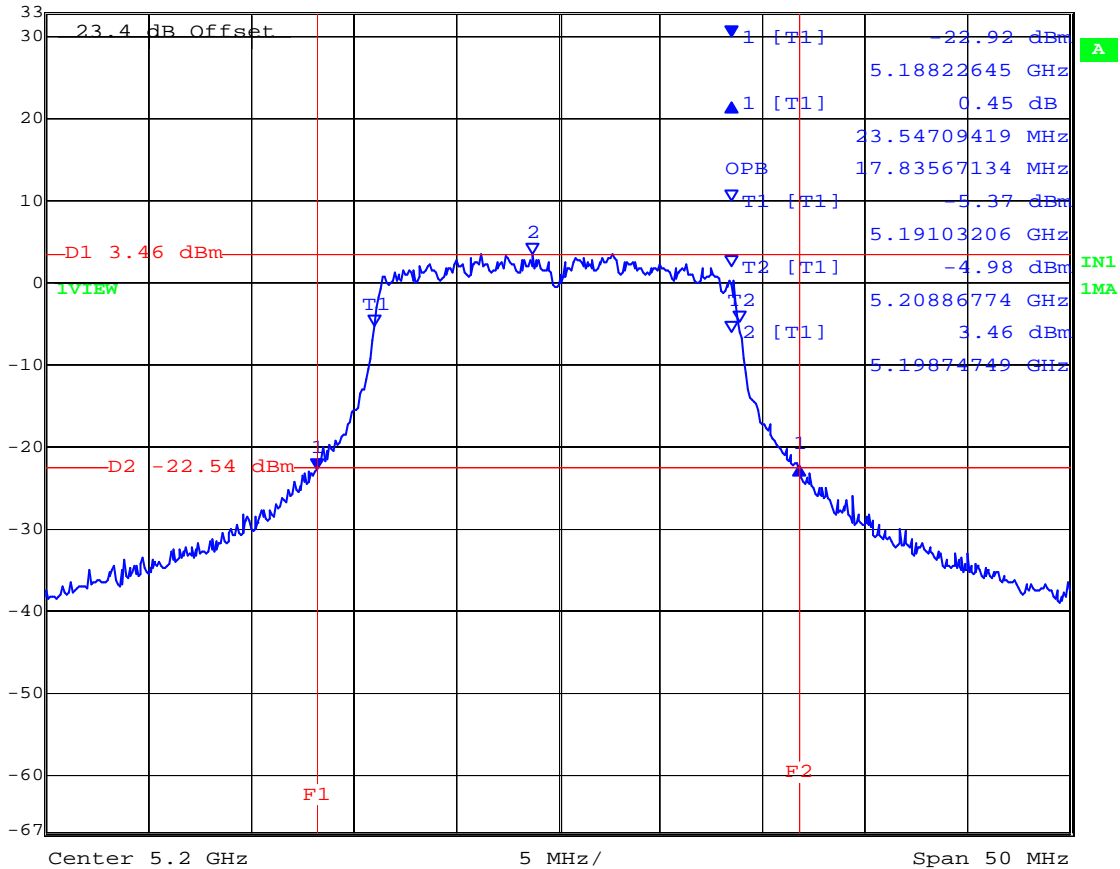


Date: 18.MAY.2008 12:59:04

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5,240 MHz 802.11n HT20 26 dB and 99 % Bandwidth

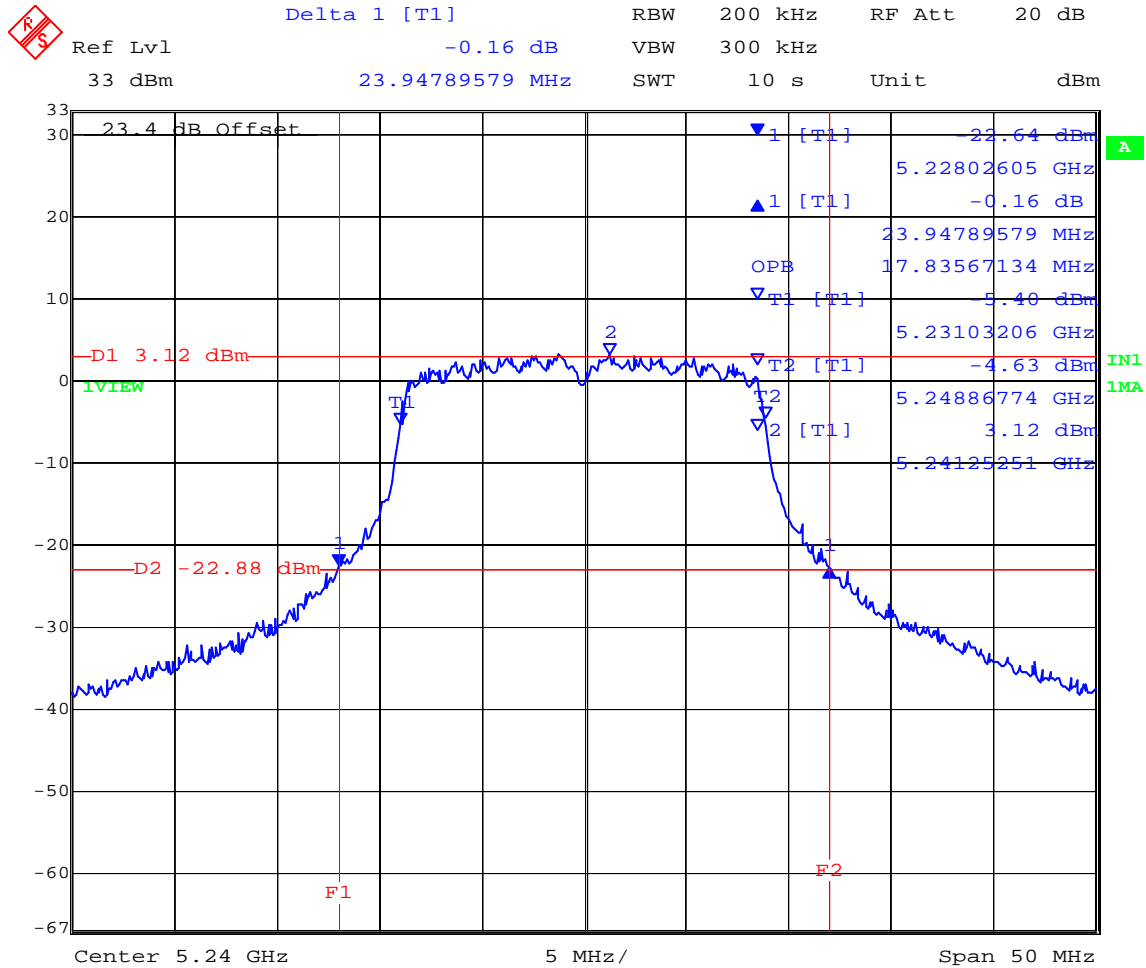

Date: 18.MAY.2008 13:03:35


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11n HT20

Center Frequency (MHz)	26 dB Bandwidth (MHz)	99 % BW (MHz)
5,260	23.547	17.735
5,300	23.948	17.836
5,320	24.048	17.836

5,260 MHz 802.11n HT20 26 dB and 99 % Bandwidth

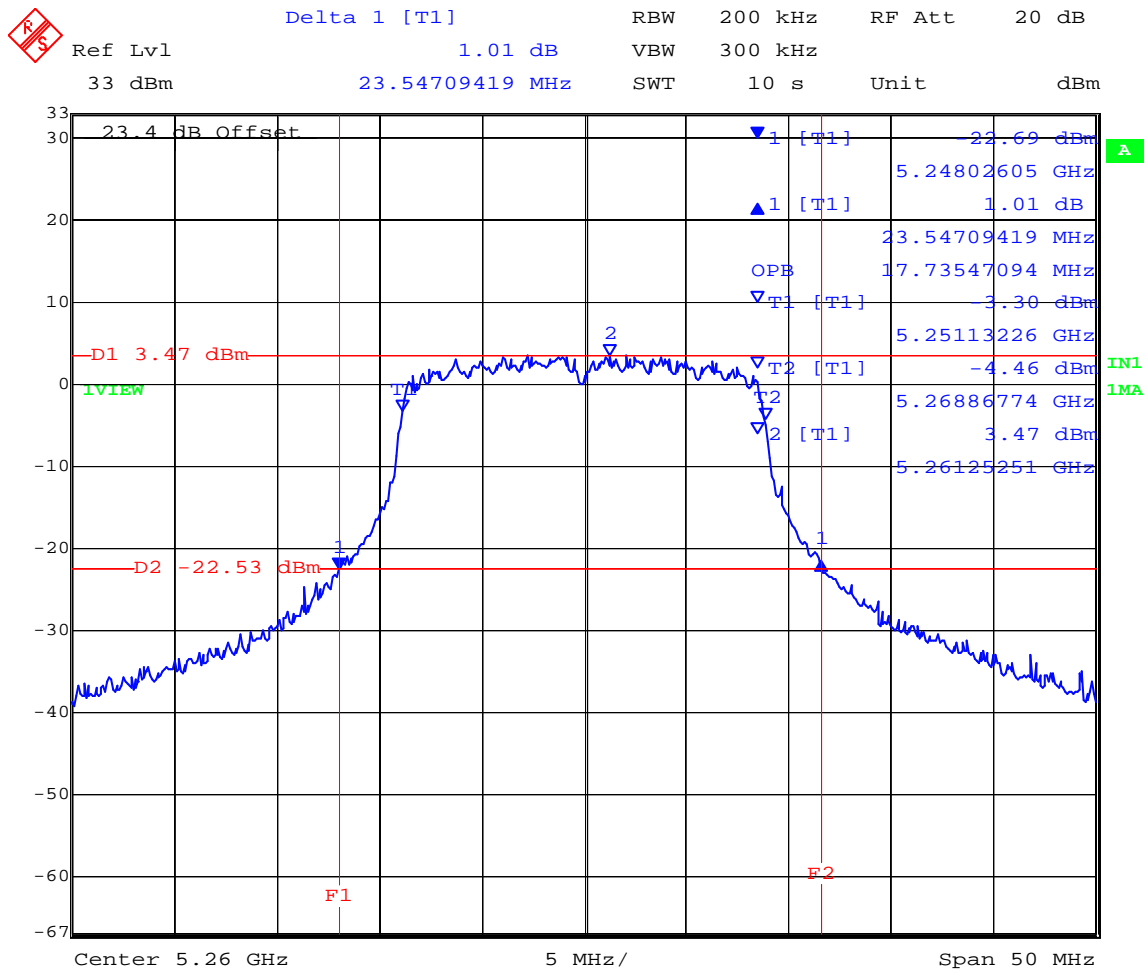

Date: 18.MAY.2008 13:05:23

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 44 of 293

5,300 MHz 802.11n HT20 26 dB and 99 % Bandwidth



Delta 1 [T1] RBW 200 kHz RF Att 20 dB
 Ref Lvl 0.24 dB VBW 300 kHz
 33 dBm 23.94789579 MHz SWT 10 s Unit dBm

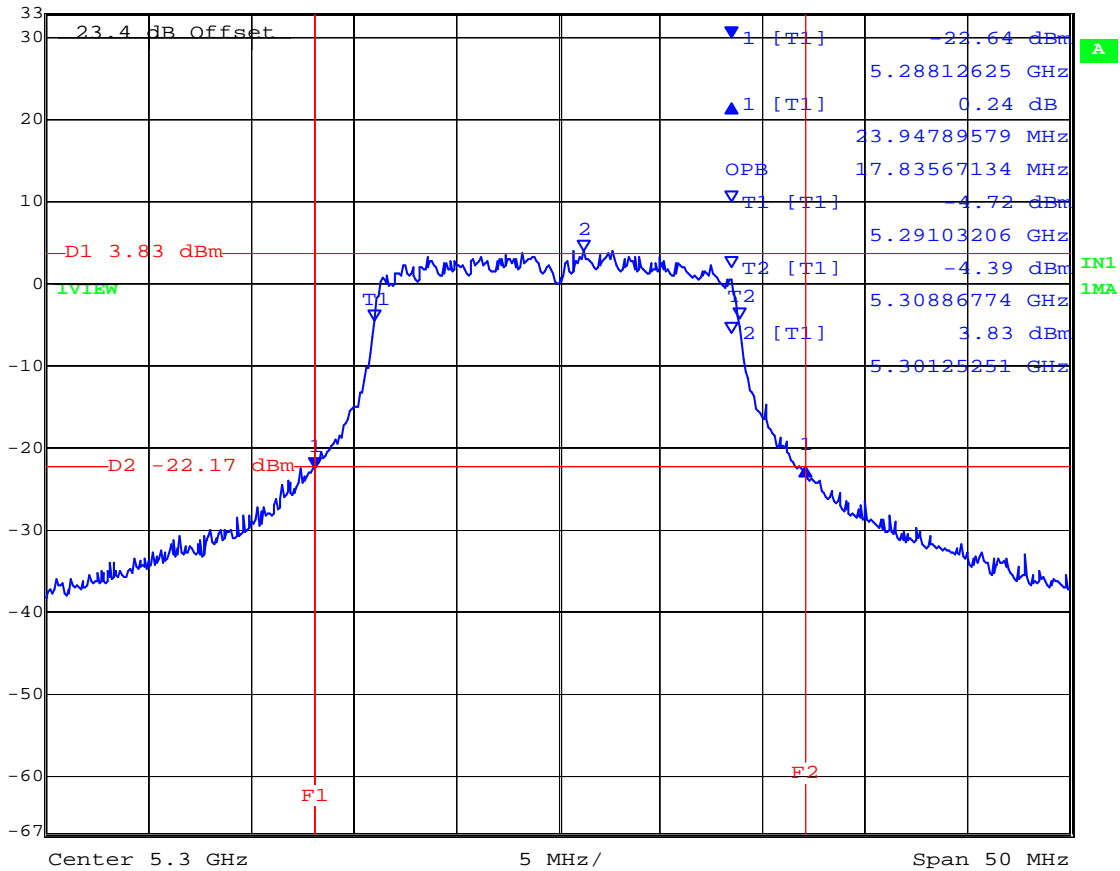

Date: 18.MAY.2008 13:07:27

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 45 of 293

5,320 MHz 802.11n HT20 26 dB and 99 % Bandwidth



Delta 1 [T1] RBW 200 kHz RF Att 20 dB
 Ref Lvl -0.03 dB VBW 300 kHz
 33 dBm 24.04809619 MHz SWT 10 s Unit dBm

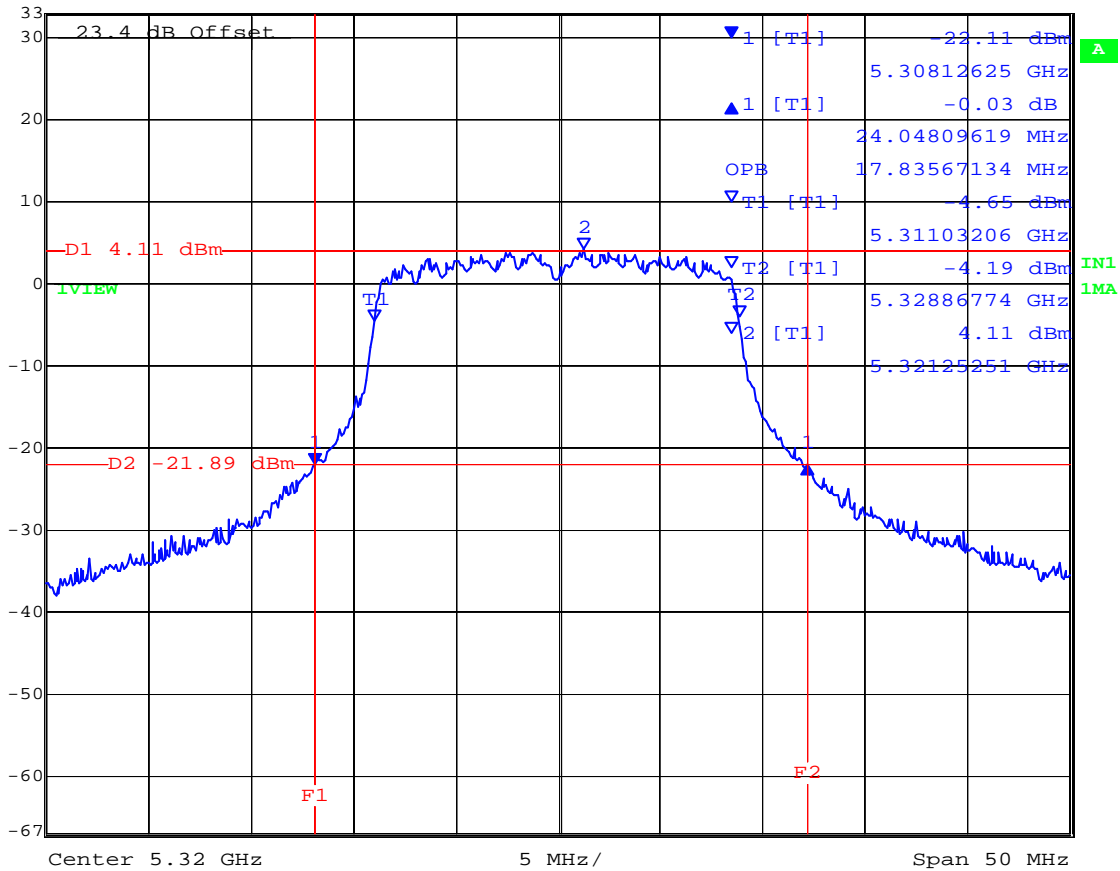

Date: 18.MAY.2008 13:09:23


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11n HT20

Center Frequency (MHz)	26 dB Bandwidth (MHz)	99 % BW (MHz)
5,500	23.647	17.836
5,600	24.449	17.836
5,700	23.347	17.836

5,500 MHz 802.11n HT20 26 dB and 99 % Bandwidth

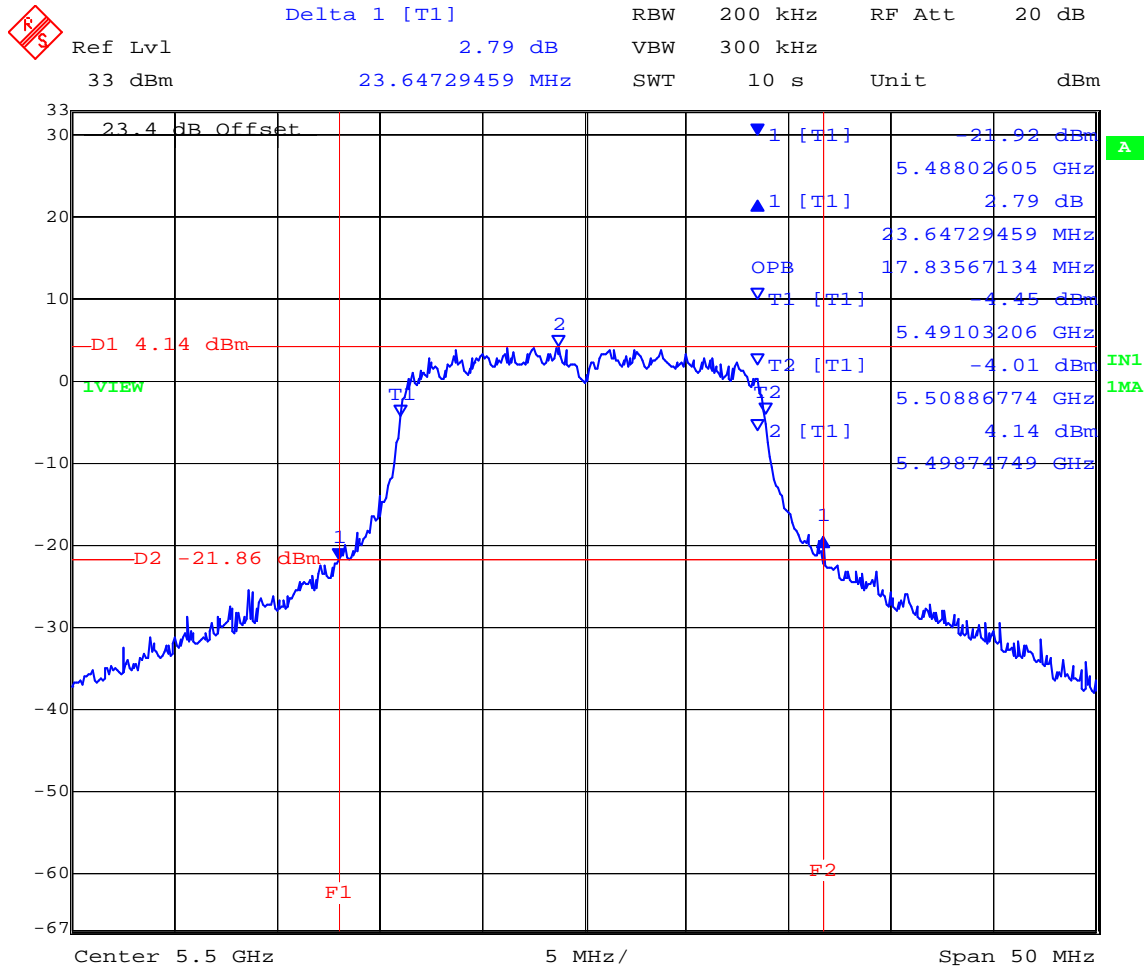

Date: 18.MAY.2008 13:12:03


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5,600 MHz 802.11n HT20 26 dB and 99 % Bandwidth



Delta 1 [T1] RBW 200 kHz RF Att 20 dB
 Ref Lvl -1.34 dB VBW 300 kHz
 33 dBm 24.44889780 MHz SWT 10 s Unit dBm

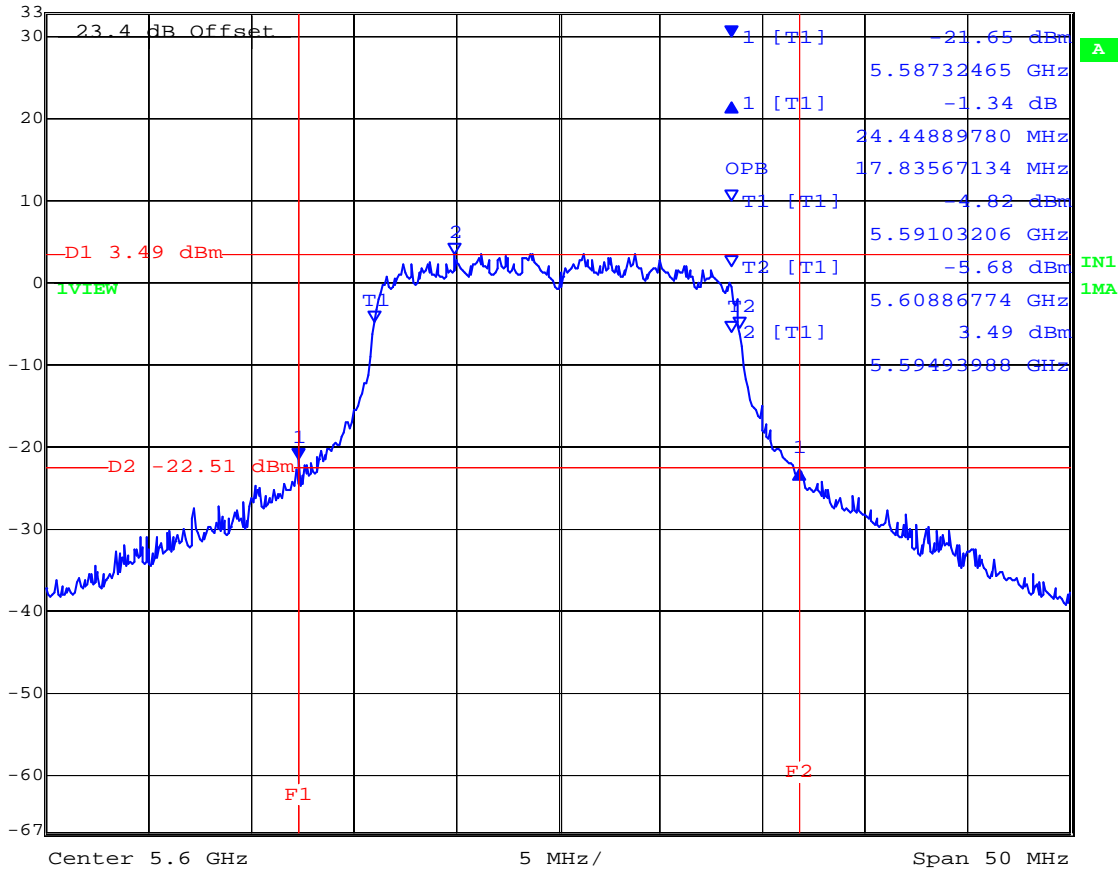


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5,700 MHz 802.11n HT20 26 dB and 99 % Bandwidth



Delta 1 [T1] RBW 200 kHz RF Att 20 dB
 Ref Lvl -1.20 dB VBW 300 kHz
 33 dBm 23.34669339 MHz SWT 10 s Unit dBm

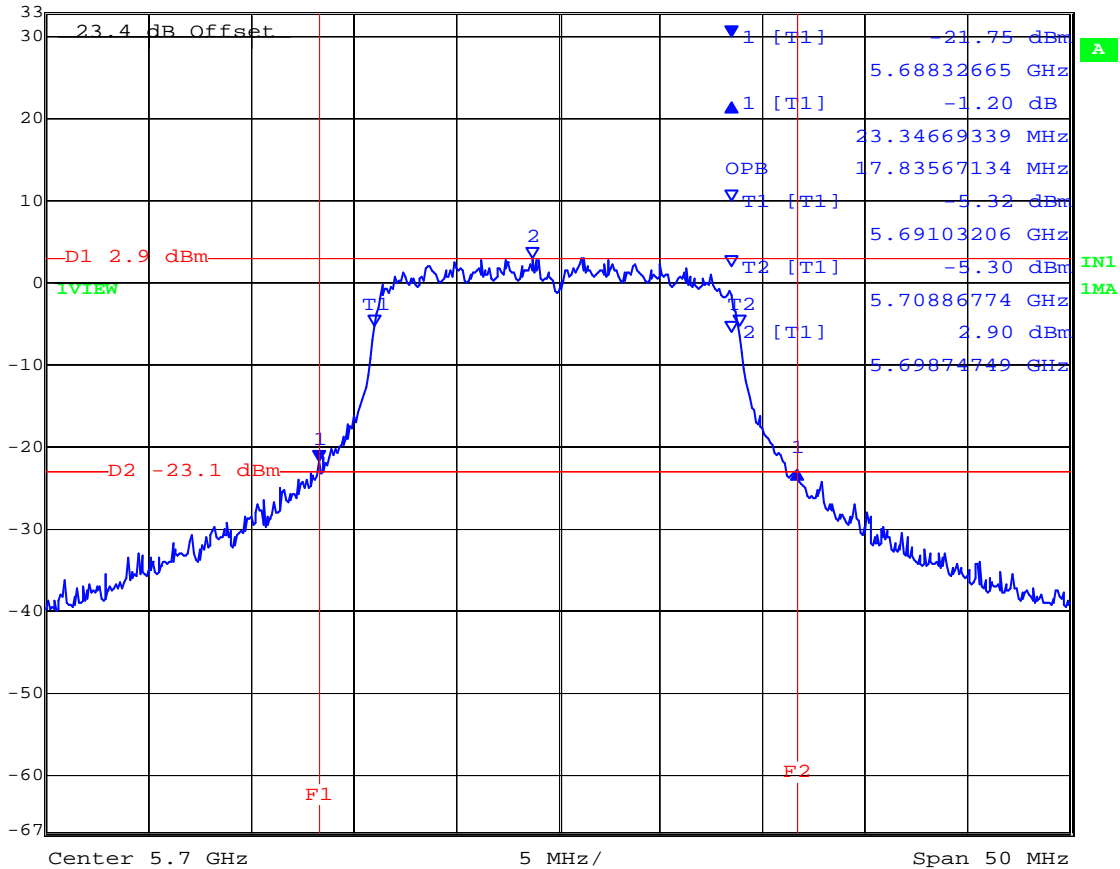

Date: 18.MAY.2008 13:16:23

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Measurement Results for 26 dB and 99 % Operational Bandwidth(s) -Continued

TABLE OF RESULTS – 802.11n HT40

Center Frequency (MHz)	26 dB Bandwidth (MHz)	99 % BW (MHz)
5,190	48.898	37.074
5,230	48.898	37.074

5,190 MHz 802.11n HT40 26 dB and 99 % Bandwidth

Delta 1 [T1]
RBW 500 kHz
RF Att 20 dB
 Ref Lvl 0.34 dB VBW 1 MHz
 33 dBm 48.89779559 MHz SWT 10 s
Unit dBm

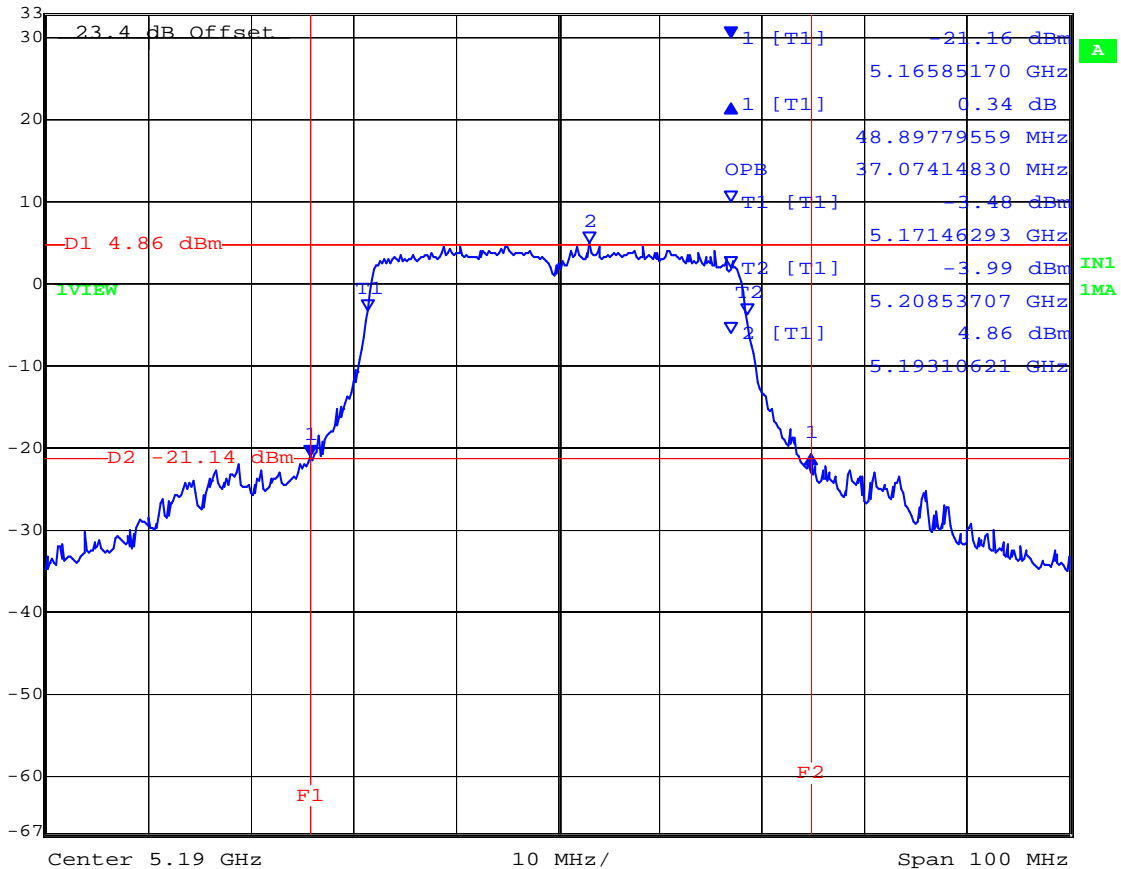

Date: 18.MAY.2008 13:24:38


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5,230 MHz 802.11n HT40 26 dB and 99 % Bandwidth



Ref Lvl	Delta 1 [T1]	RBW	500 kHz	RF Att	20 dB
33 dBm	-0.43 dB	VBW	1 MHz		
	48.89779559 MHz	SWT	10 s	Unit	dBm

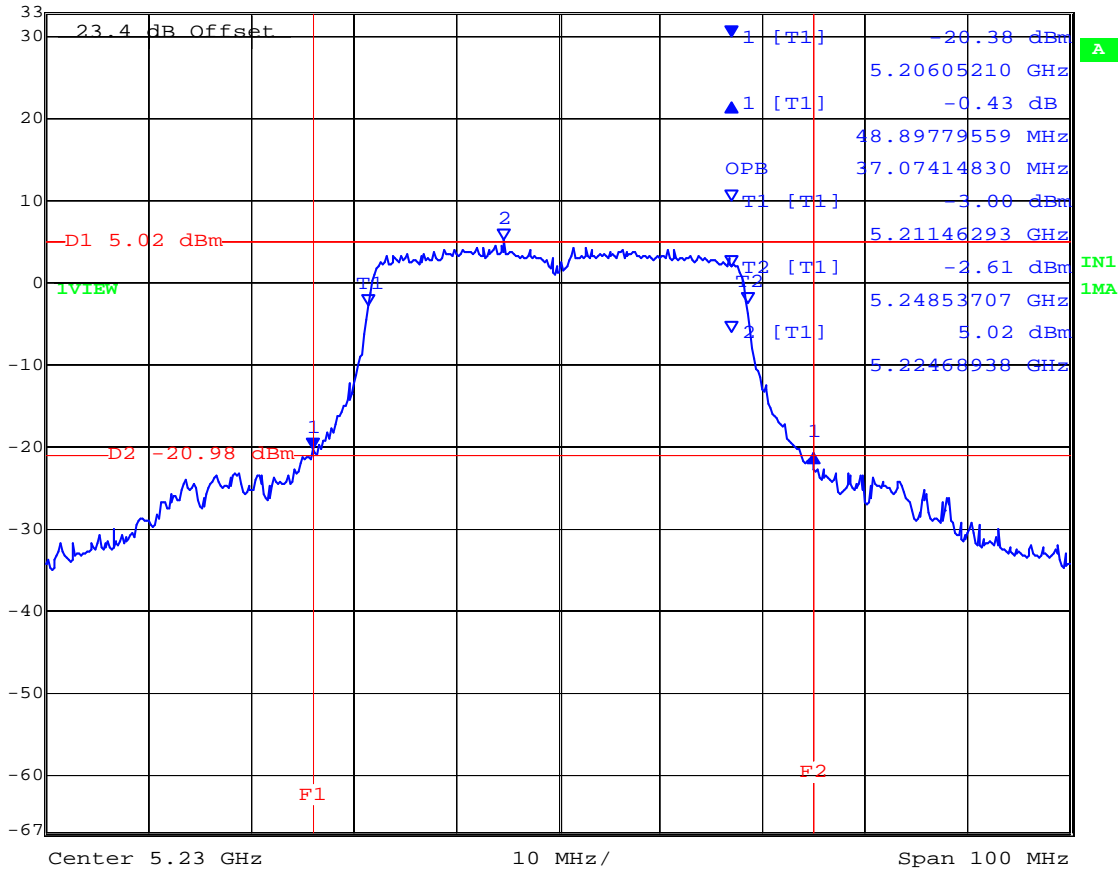

Date: 18.MAY.2008 13:27:04


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11n HT40

Center Frequency (MHz)	26 dB Bandwidth (MHz)	99 % BW (MHz)
5,270	49.299	37.074
5,310	49.900	37.275

5,270 MHz 802.11n HT40 26 dB and 99 % Bandwidth

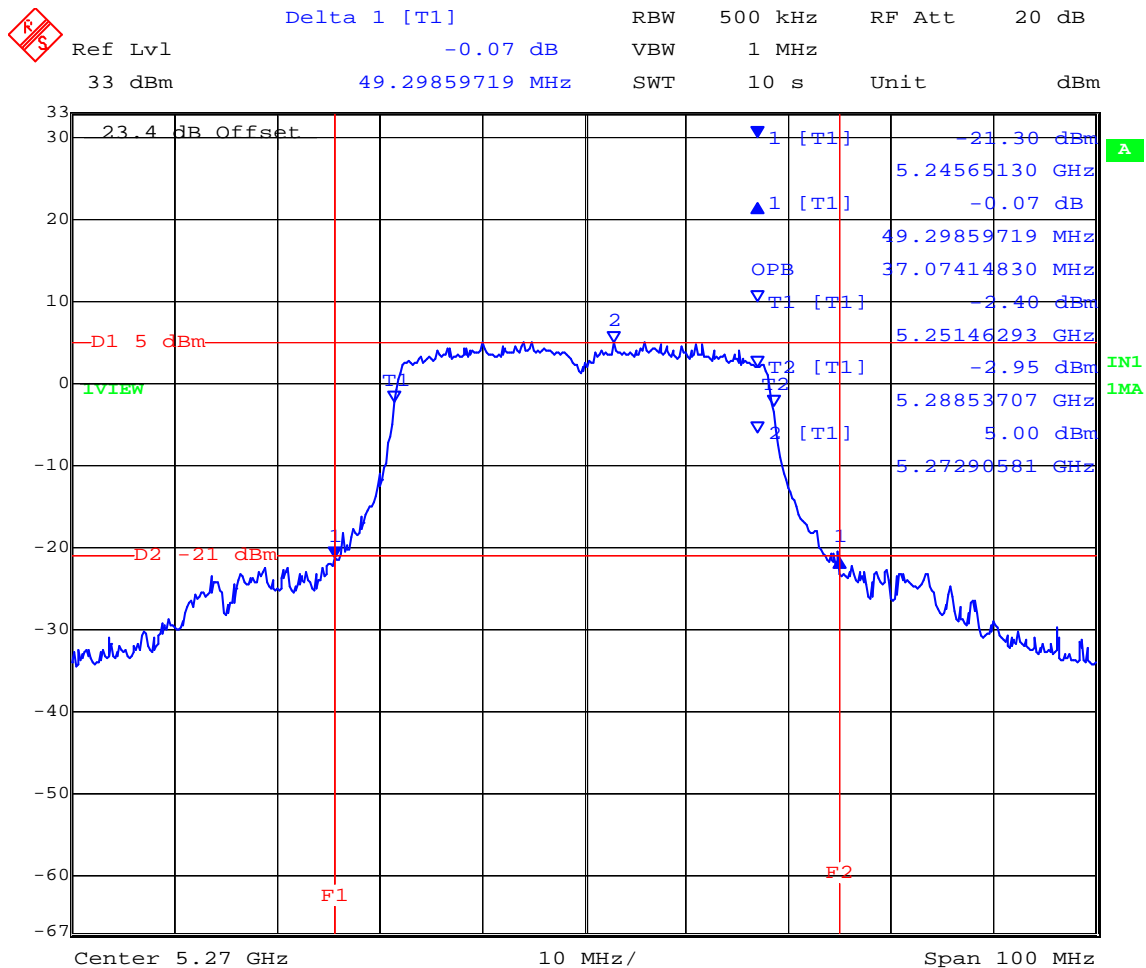

Date: 18.MAY.2008 13:29:52


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 52 of 293

5,310 MHz 802.11n HT40 26 dB and 99 % Bandwidth

Delta 1 [T1] RBW 500 kHz RF Att 20 dB
 Ref Lvl 0.08 dB VBW 1 MHz
 33 dBm 49.89979960 MHz SWT 10 s Unit dBm

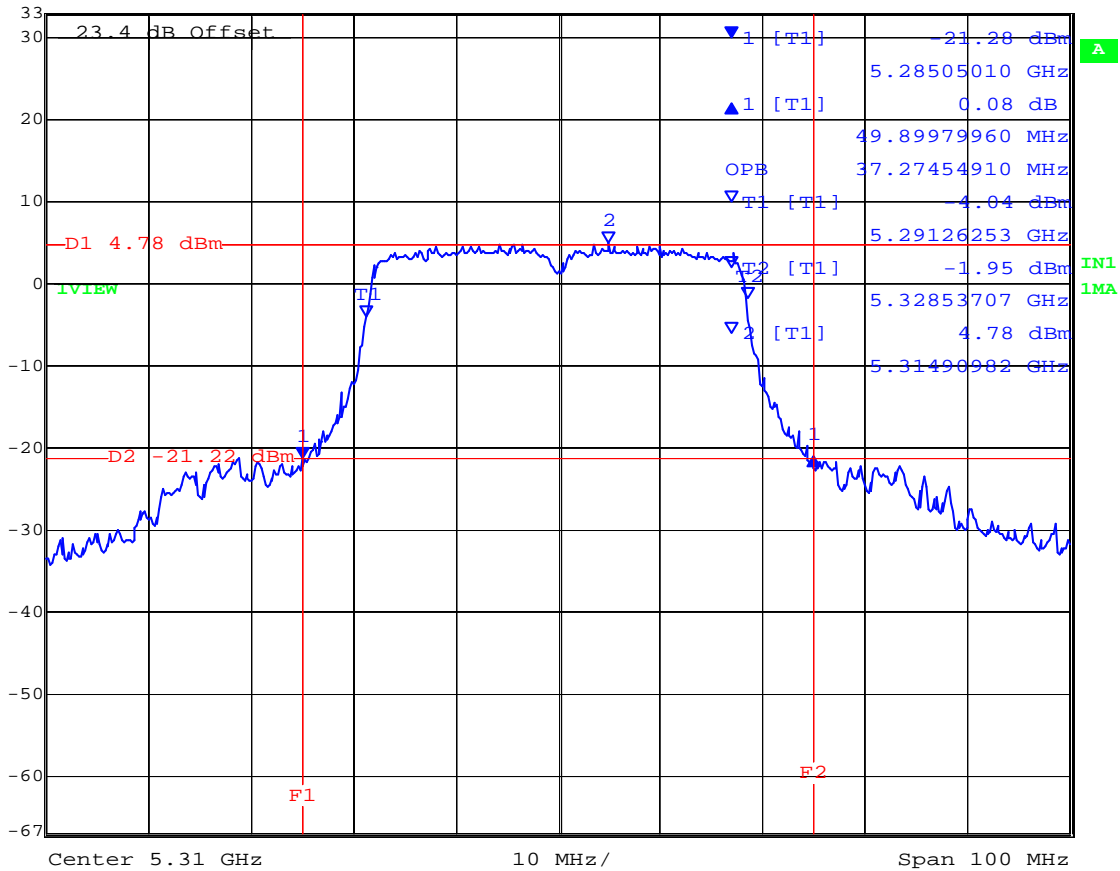

Date: 18.MAY.2008 13:32:18


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11n HT40

Center Frequency (MHz)	26 dB Bandwidth (MHz)	99 % BW (MHz)
5,510	68.737	37.475
5,620	64.128	37.275
5,690	65.331	37.275

5,510 MHz 802.11n HT40 26 dB and 99 % Bandwidth

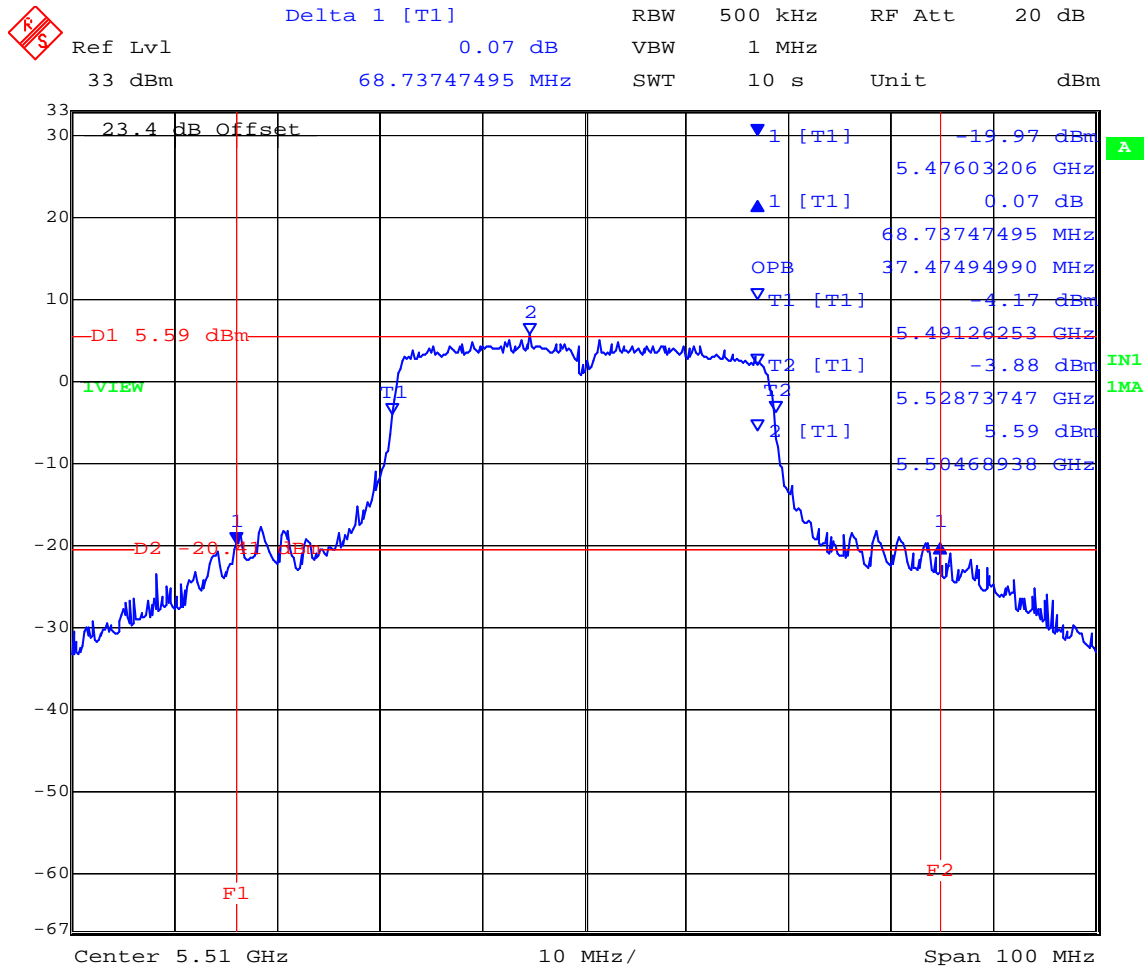

Date: 18.MAY.2008 13:34:49


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 54 of 293

5,620 MHz 802.11n HT40 26 dB and 99 % Bandwidth

Delta 1 [T1] RBW 500 kHz RF Att 20 dB
 Ref Lvl 0.61 dB VBW 1 MHz
 33 dBm 64.12825651 MHz SWT 10 s Unit dBm

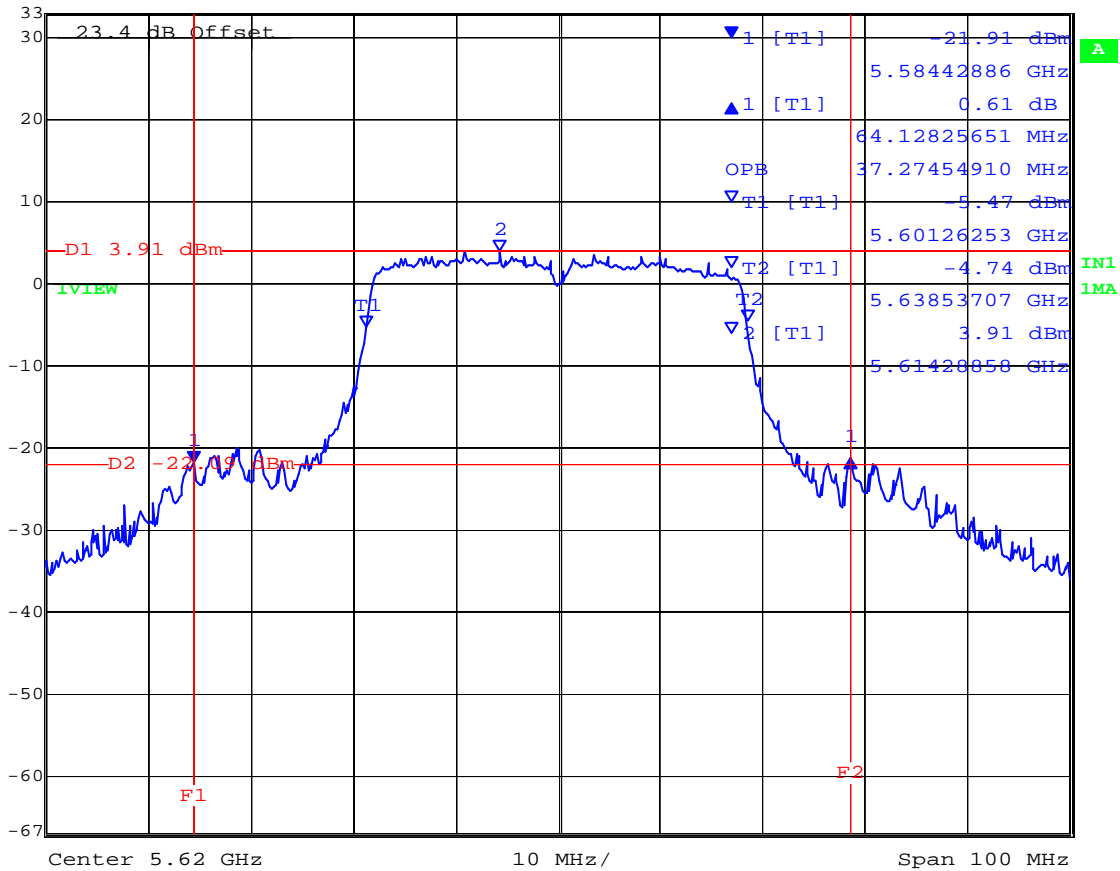

Date: 18.MAY.2008 13:37:20

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 55 of 293

5,690 MHz 802.11n HT40 26 dB and 99 % Bandwidth



	Delta 1 [T1]	RBW	500 kHz	RF Att	20 dB
Ref Lvl	0.27 dB	VBW	1 MHz		
33 dBm	65.33066132 MHz	SWT	10 s	Unit	dBm

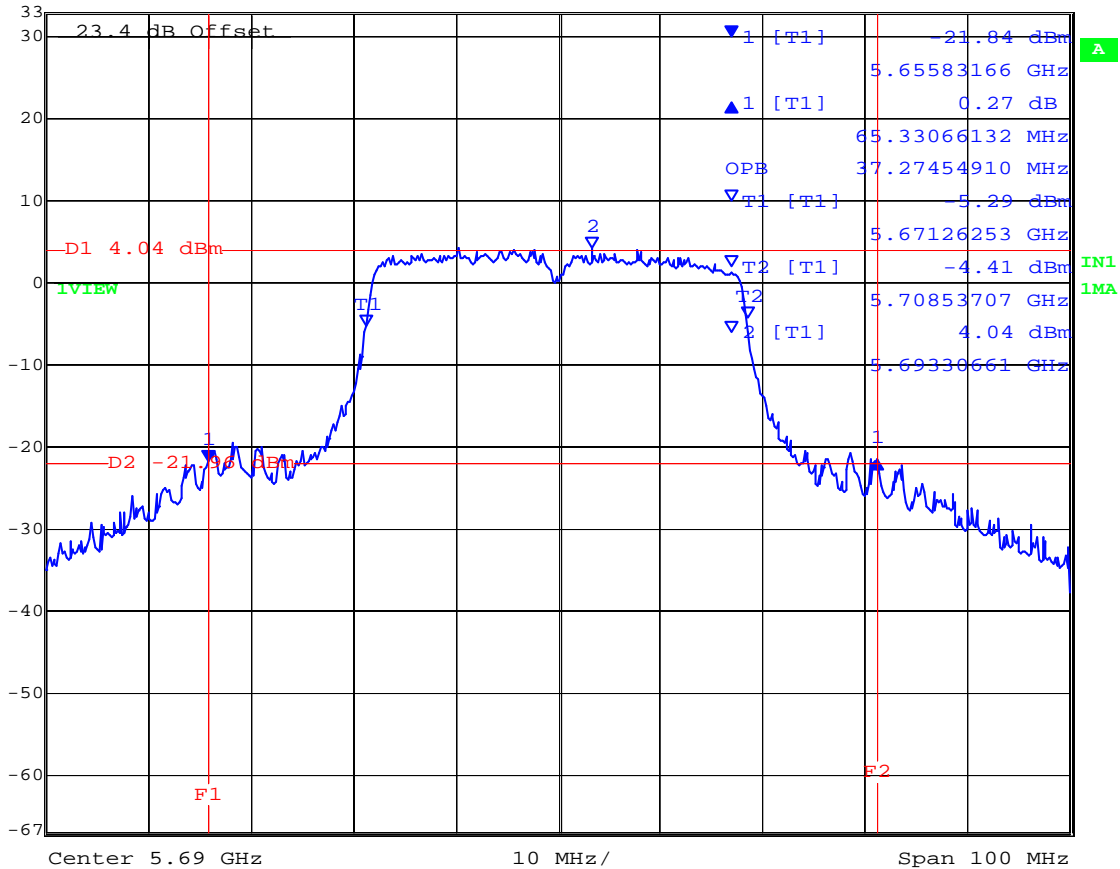

Date: 18.MAY.2008 13:40:57

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 56 of 293

Specification

Limits

FCC, Part 15 §15.407 (a)(1), (a)(2) and Industry Canada RSS-210 § A9.2(2)

(a)(1) For the band 5.15-5.25 GHz the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or +4 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

(a)(2) For the 5.25-5.35 GHz band the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or +11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

Industry Canada RSS-Gen 4.4

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

Laboratory Measurement Uncertainty for Spectrum Measurement

Measurement uncertainty	±2.81 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of RF Spectrum Mask'	0158, 0193, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.2. Transmit Output Power

FCC, Part 15 Subpart C §15.407(a)


Industry Canada RSS-210 §9.9(2)

Industry Canada RSS-Gen 4.6

Test Procedure

The transmitter terminal of EUT was connected to the input of an average power meter. Measurements were made while EUT was operating in a continuous transmission mode i.e. 100 % duty cycle at the appropriate center frequency. All cable losses and offsets were taken into consideration in the measured result.

Test Measurement Set up

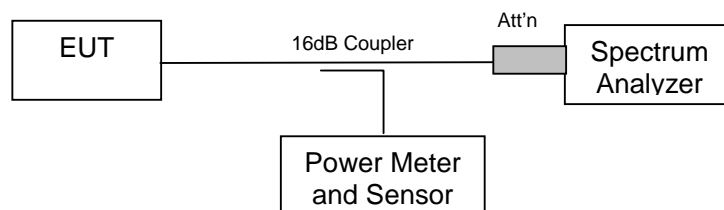

Measurement set up for Transmitter Output Power



Antenna Gain - Maximum Permissible Peak Transmit Power

If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum allowable peak power in the 5150 – 5250 MHz frequency band is +17 dBm.

The maximum allowable peak power in the 5250 – 5350 MHz, and 5470 – 5725 MHz frequency band is + 24 dBm.

Antenna Type	Freq Band (MHz)	Gain (dBi)	Antenna Gain >6dBi (dB)	Max. Allowable Peak Power (dBm)	Max. EIRP (dBm)
ANT-12 Panel	5150-5250	14	8	17 – 8 = 9	23.0
ANT-12 Panel	5250-5350 5470-5725	14	8	24 – 8 = 16	30.0

Maximum Transmit Power, FCC Limits

Limit 5150 – 5250 MHz: Lesser of 50 mW (+17dBm) or $4 + 10 \text{ Log (B)}$ dBm

Frequency Range (MHz)	Maximum 26 dB Bandwidth (MHz)	$4 + 10 \text{ Log (B)}$ (dBm)	Limit (dBm)
5150 – 5250	69.539	22.42	17.00

Limit 5250 – 5350 and 5470 – 5725; Lesser of 250 mW (+24dBm) or $11 + 10 \text{ Log (B)}$ dBm

Frequency Range (MHz)	Maximum 26 dB Bandwidth (MHz)	$11 + 10 \text{ Log (B)}$ (dBm)	Limit (dBm)
5250 - 5350	70.140	29.46	24.00
5470 - 5725	90.581	30.57	24.00



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 59 of 293

Maximum Transmit Power Industry Canada Limits

Limit 5150 – 5250 MHz: Lesser of 200 mW (+23 dBm) or $10 + 10 \log(B)$ dBm

Frequency Range (MHz)	Maximum 99% Bandwidth (MHz)	$10 + 10 \log(B)$ (dBm)	Limit (dBm)
5150 – 5250	38.877	25.90	23.00

Limit 5250 – 5350 and 5470 – 5725; Lesser of 250 mW (+24dBm) or $11 + 10 \log(B)$ dBm

Frequency Range (MHz)	Maximum 99% Bandwidth (MHz)	$11 + 10 \log(B)$ (dBm)	Limit (dBm)
5250 - 5350	38.677	25.88	24.00
5470 - 5725	45.291	27.56	24.00

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 60 of 293

Measurement Results for Transmit Output Power

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

EUT parameters.

Power Level: Maximum

Duty Cycle: 100%

TABLE OF RESULTS – 802.11a Legacy

Center Frequency (MHz)	Maximum Conducted Power (dBm)
5,180	+14.93
5,200	+14.24
5,240	+14.06

TABLE OF RESULTS – 802.11a Legacy

Center Frequency (MHz)	Maximum Conducted Power (dBm)
5,260	+14.44
5,300	+14.20
5,320	+14.52

TABLE OF RESULTS – 802.11a Legacy

Center Frequency (MHz)	Maximum Conducted Power (dBm)
5,500	+14.99
5,600	+15.67
5,700	+15.80

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 61 of 293

TABLE OF RESULTS – 802.11n HT20

Center Frequency (MHz)	Maximum Conducted Power (dBm)
5,180	+14.93
5,200	+14.29
5,240	+13.98

TABLE OF RESULTS – 802.11n HT20

Center Frequency (MHz)	Maximum Conducted Power (dBm)
5,260	+14.37
5,300	+14.12
5,320	+14.45

TABLE OF RESULTS – 802.11n HT20

Center Frequency (MHz)	Maximum Conducted Power (dBm)
5,500	+14.96
5,600	+15.70
5,700	+15.62

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 62 of 293

TABLE OF RESULTS – 802.11n HT40

Center Frequency (MHz)	Maximum Conducted Power (dBm)
5,190	+14.42
5,230	+14.15

TABLE OF RESULTS – 802.11n HT40

Center Frequency (MHz)	Maximum Conducted Power (dBm)
5,270	+13.70
5,310	+14.10

TABLE OF RESULTS – 802.11n HT40

Center Frequency (MHz)	Maximum Conducted Power (dBm)
5,510	+14.85
5,620	+15.95
5,690	+14.96

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Specification

Limits

FCC, Part 15 §15.407 (a)(1), (a)(2) and Industry Canada RSS-210 § A9.2(2)

(a)(1) For the band 5.15-5.25 GHz the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or +4 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

(a)(2) For the 5.25-5.35 GHz band the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or +11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

Industry Canada RSS-210 §A9.2(2)
 For the band 5150-5250 MHz, the maximum equivalent isotropically radiated power (e.i.r.p.) shall not exceed 200 mW or 10 + 10 log₁₀ B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

For the band 5250-5350 MHz and 5470-5725 MHz, the maximum conducted output power shall not exceed 250 mW or 11 + 10 log₁₀ B, dBm, whichever power is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band. The maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log₁₀ B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

Industry Canada RSS-Gen 4.4
 When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

Laboratory Measurement Uncertainty for Power Measurements

Measurement uncertainty	±1.33 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-01 'Measuring RF Output Power'	0158, 0193, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5.1.3. Peak Power Spectral Density

FCC, Part 15 Subpart C §15.407(a)
Industry Canada RSS-210 § A9.2(2)

Test Procedure

The transmitter output was connected to a spectrum analyzer and the peak power spectral density measured. Method 2 Sample Detection and power averaging, specified in FCC document DA 02-2138 (Normative Reference (ix) Section 2.1 “Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices”) was used to determine the peak power spectral density of the emission. The Peak Power Spectral Density is the highest level found across the emission in a 1 MHz resolution bandwidth.

Test Measurement Set up

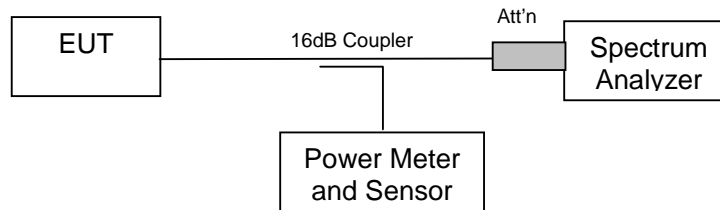

Measurement set up for Peak Power Spectral Density

Measurement Results for Peak Power Spectral Density

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

Radio Parameters

Duty Cycle: 100%

Output: Modulated Carrier


Power: Maximum Default Power



TABLE OF RESULTS – 802.11a Legacy

Center Frequency (MHz)	Peak Frequency (MHz)	PPSD (dBm)
5,180	5178.54709	+2.49
5,200	5198.64729	+2.11
5,240	5237.34469	+2.21

5,180 MHz 802.11a Legacy Peak Power Spectral Density

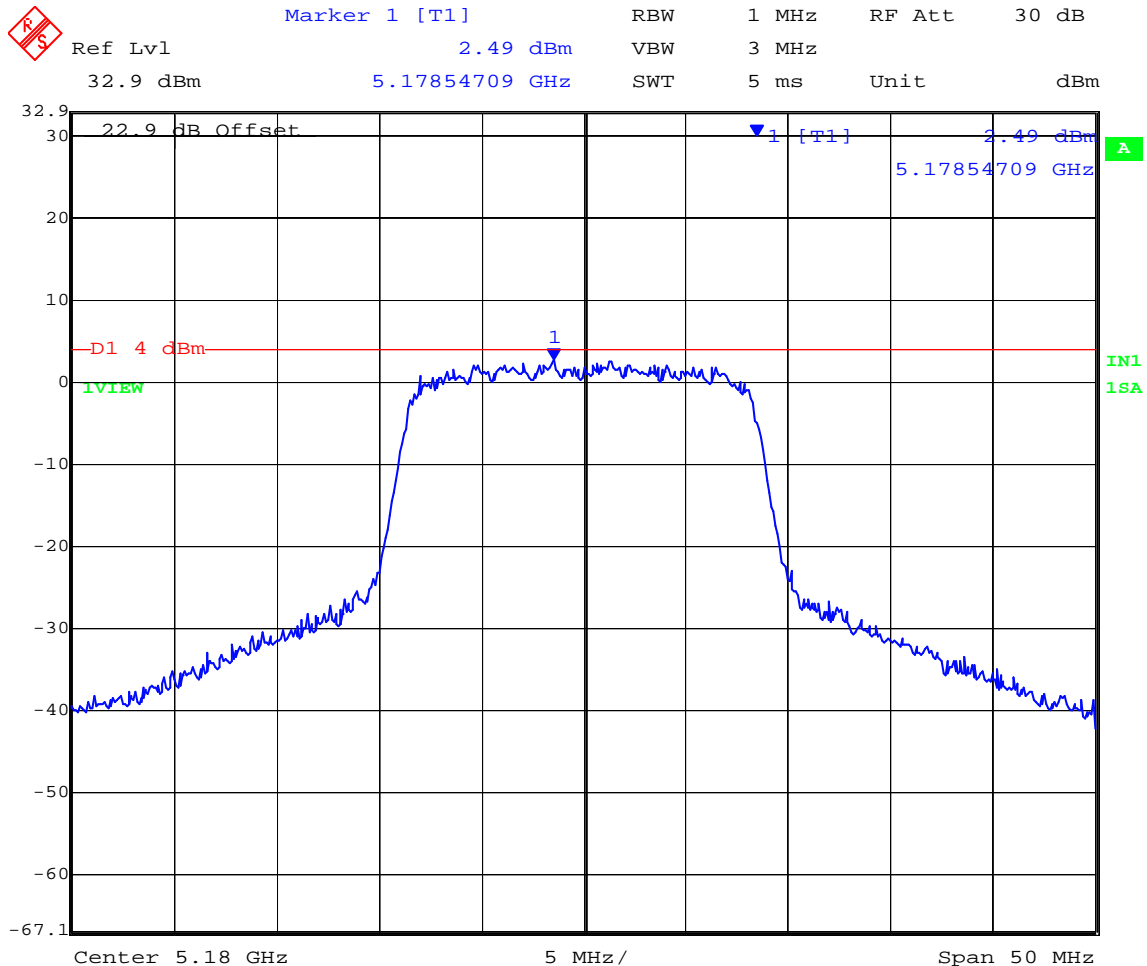


Date: 10.NOV.2007 13:10:14

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 66 of 293

5,200 MHz 802.11a Legacy Peak Power Spectral Density

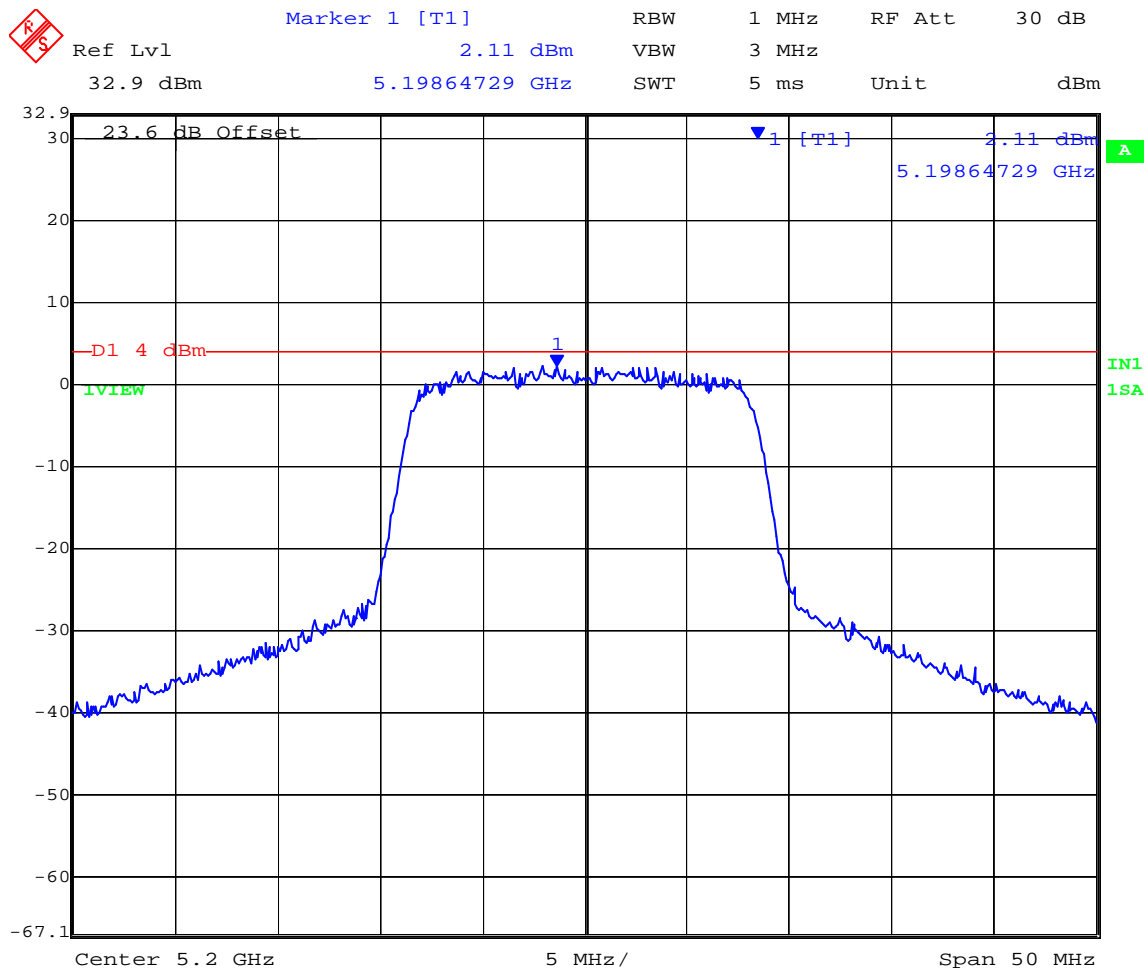


Date: 5.DEC.2007 19:36:38

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 67 of 293

5,240 MHz 802.11a Legacy Peak Power Spectral Density

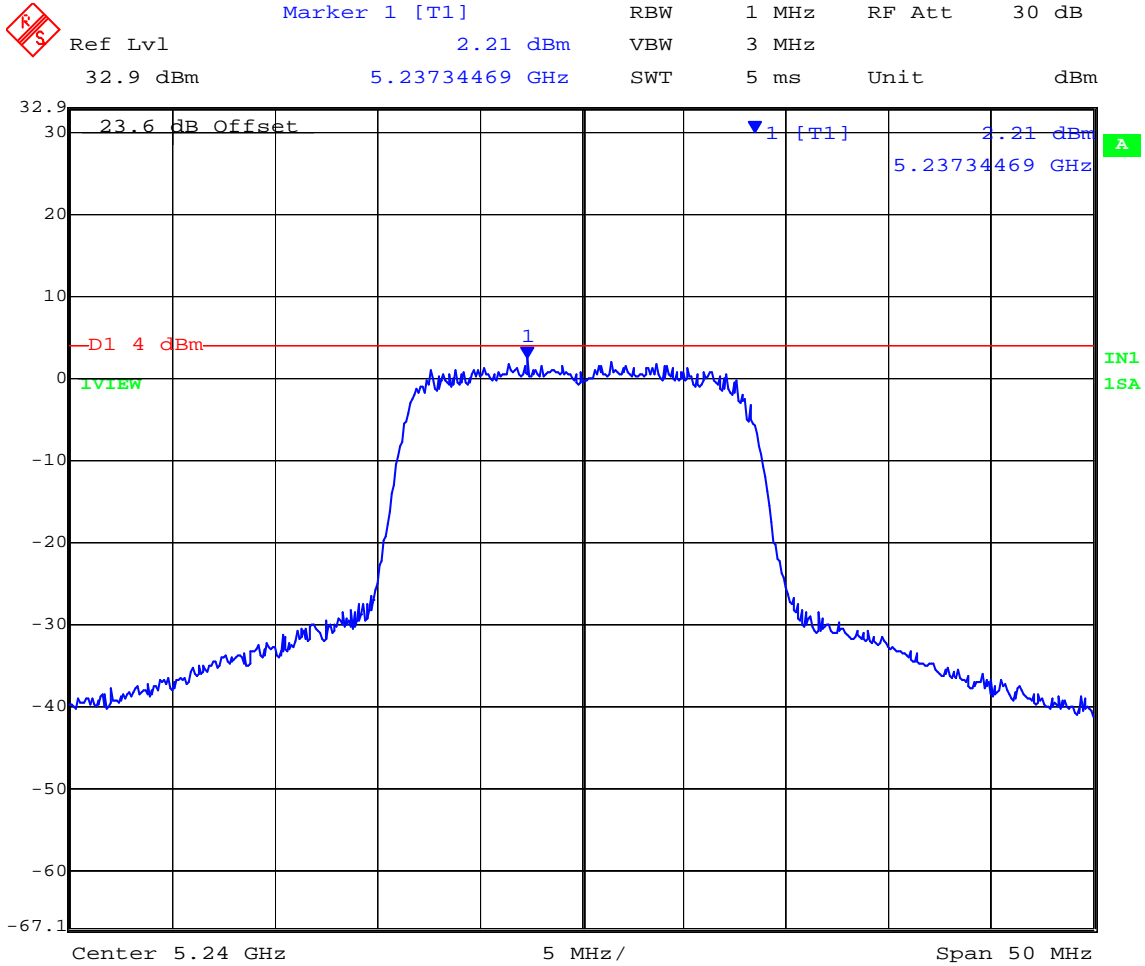

Date: 5.DEC.2007 19:35:31


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11a Legacy

Center Frequency (MHz)	Peak Frequency (MHz)	PPSD (dBm)
5,260	5258.34669	+2.23
5,300	5298.94790	+1.84
5,320	5137.24449	+2.74

5,260 MHz 802.11a Legacy Peak Power Spectral Density

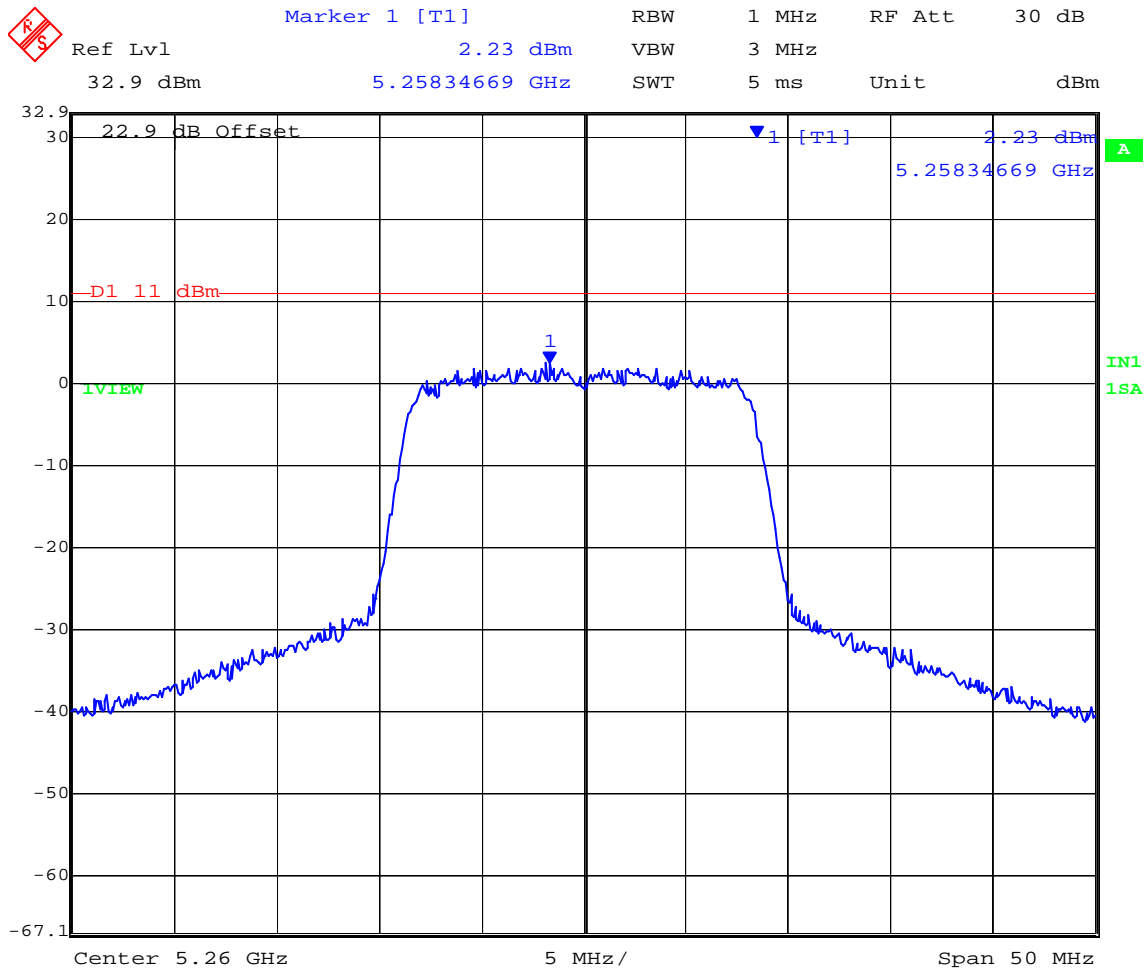


Date: 10.NOV.2007 13:13:15

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5,300 MHz 802.11a Legacy Peak Power Spectral Density

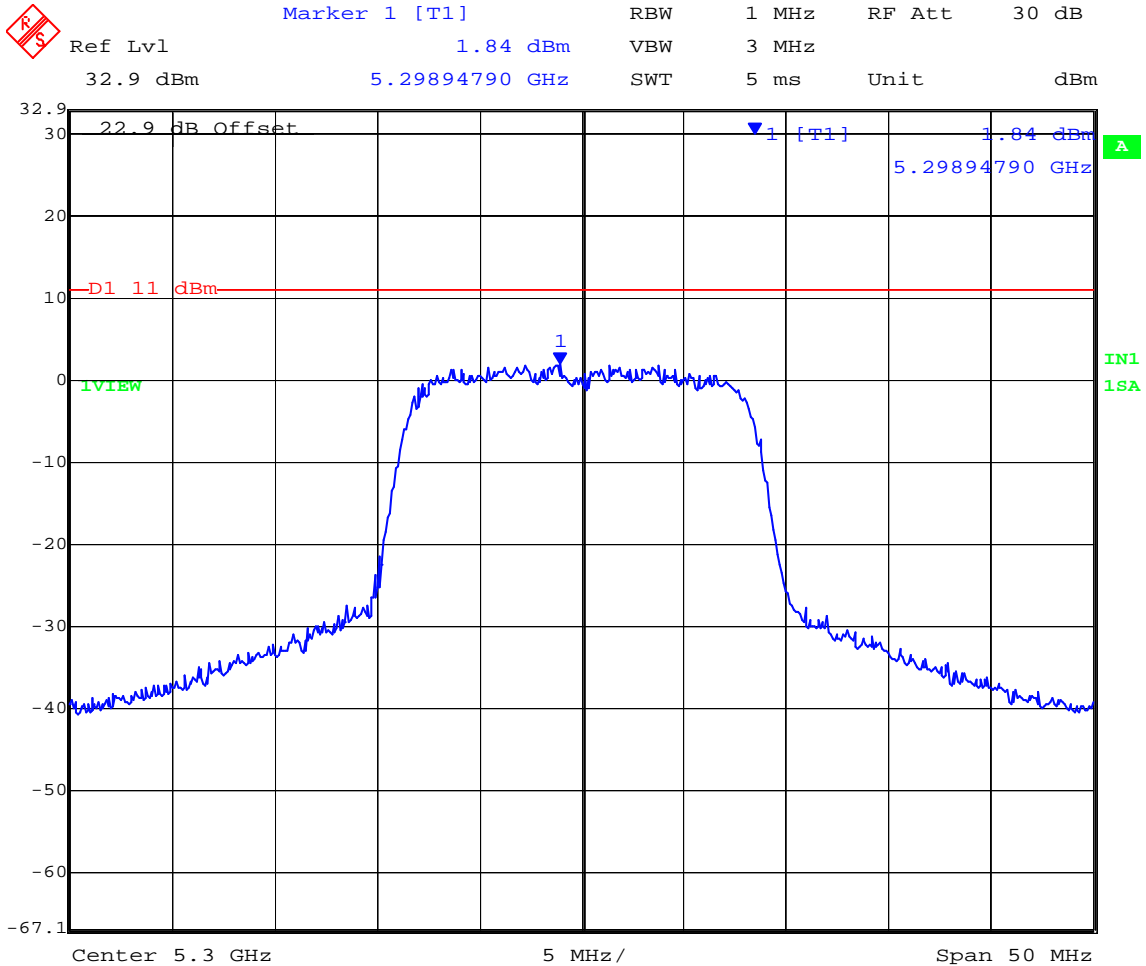


Date: 10.NOV.2007 13:14:33

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 70 of 293

5,320 MHz 802.11a Legacy Peak Power Spectral Density

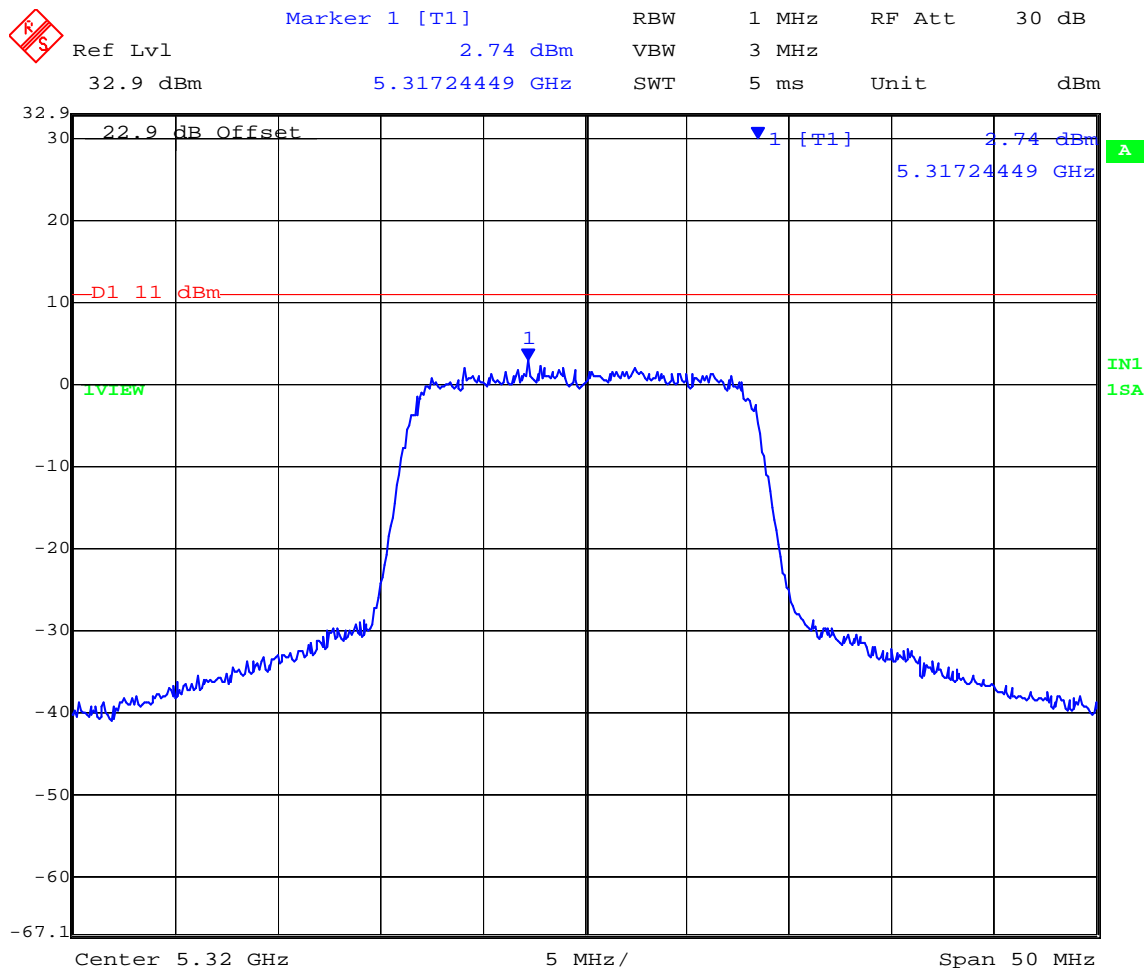

Date: 10.NOV.2007 13:15:15


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11a Legacy

Center Frequency (MHz)	Peak Frequency (MHz)	PPSD (dBm)
5,500	5496.54309	+3.10
5,600	5603.35671	+3.12
5,700	5702.65531	+3.92

5,500 MHz 802.11a Legacy Peak Power Spectral Density

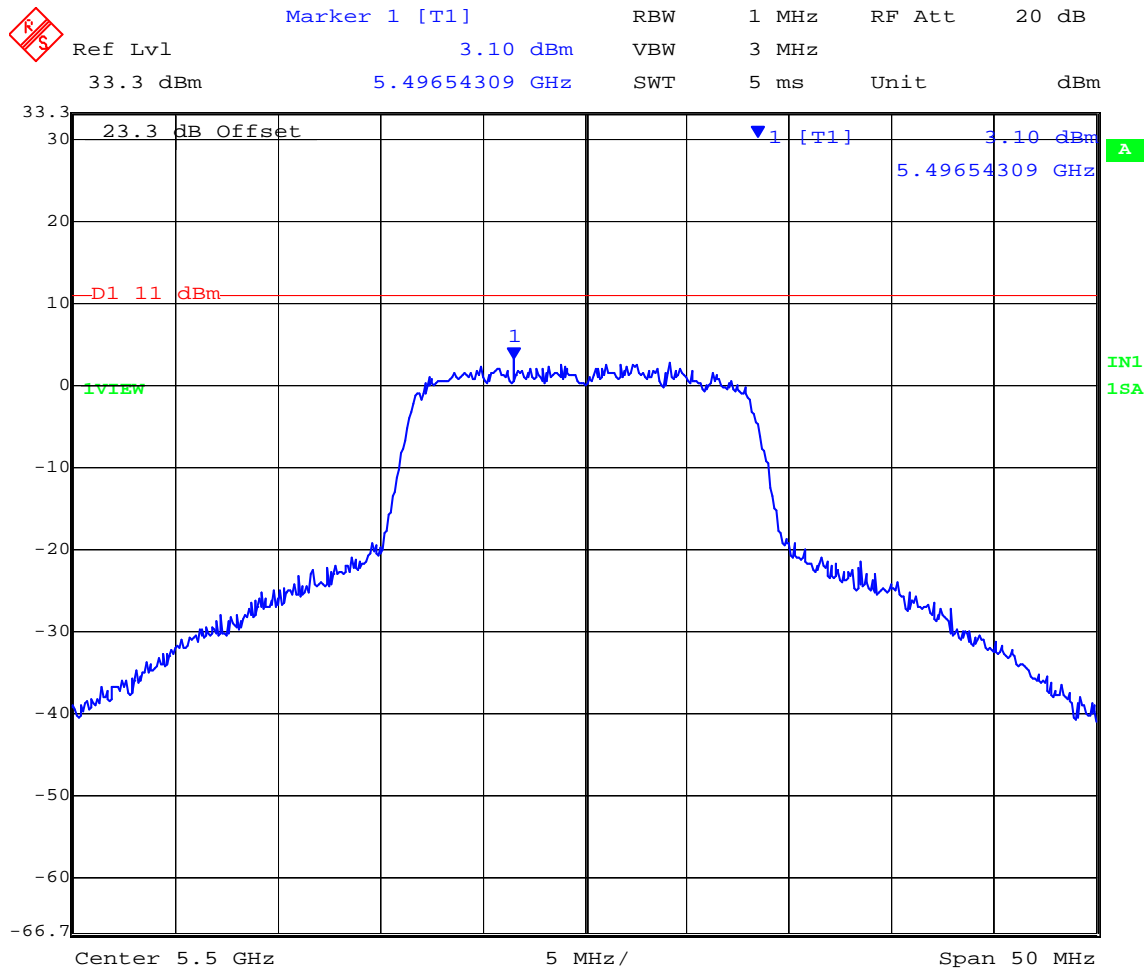


Date: 10.NOV.2007 16:00:23

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 72 of 293

5,600 MHz 802.11a Legacy Peak Power Spectral Density

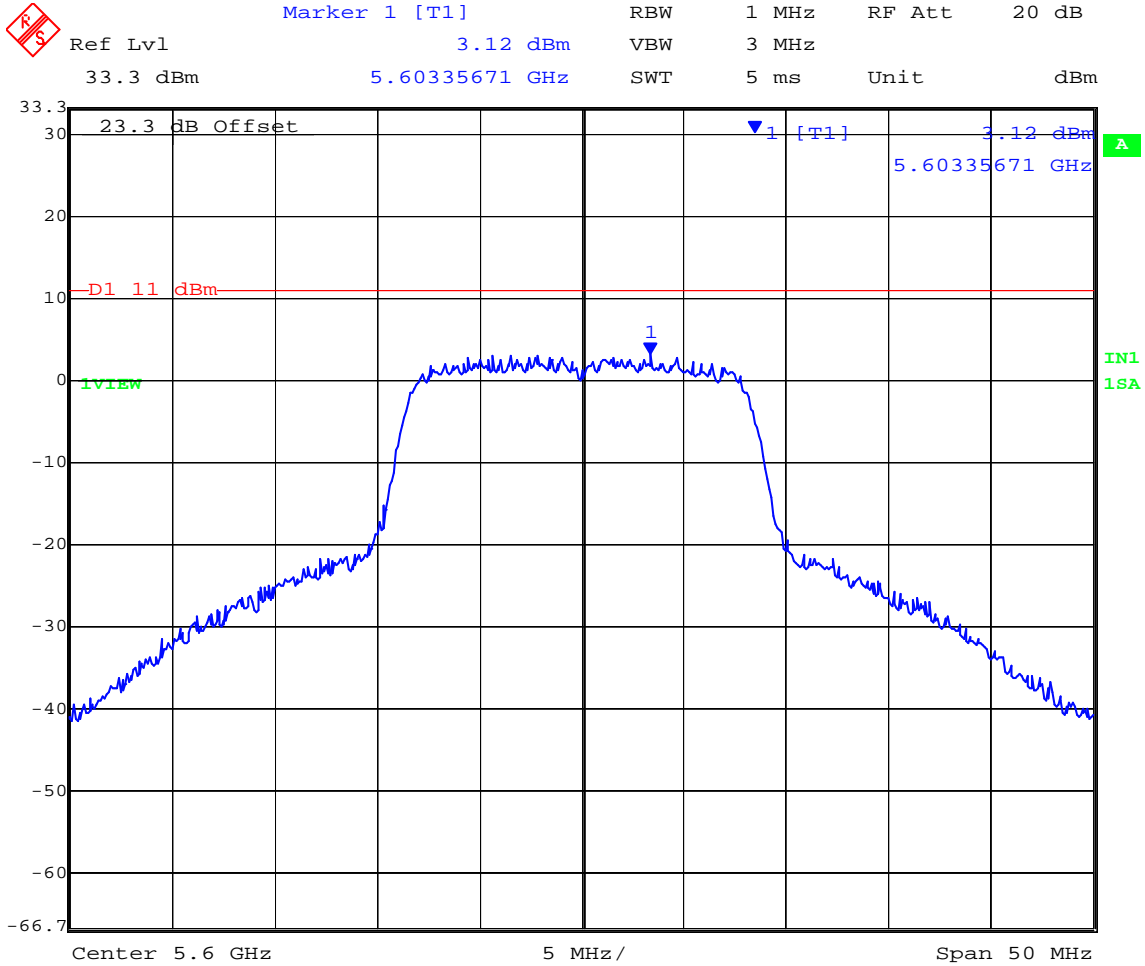


Date: 10.NOV.2007 15:59:41

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 73 of 293

5,700 MHz 802.11a Legacy Peak Power Spectral Density

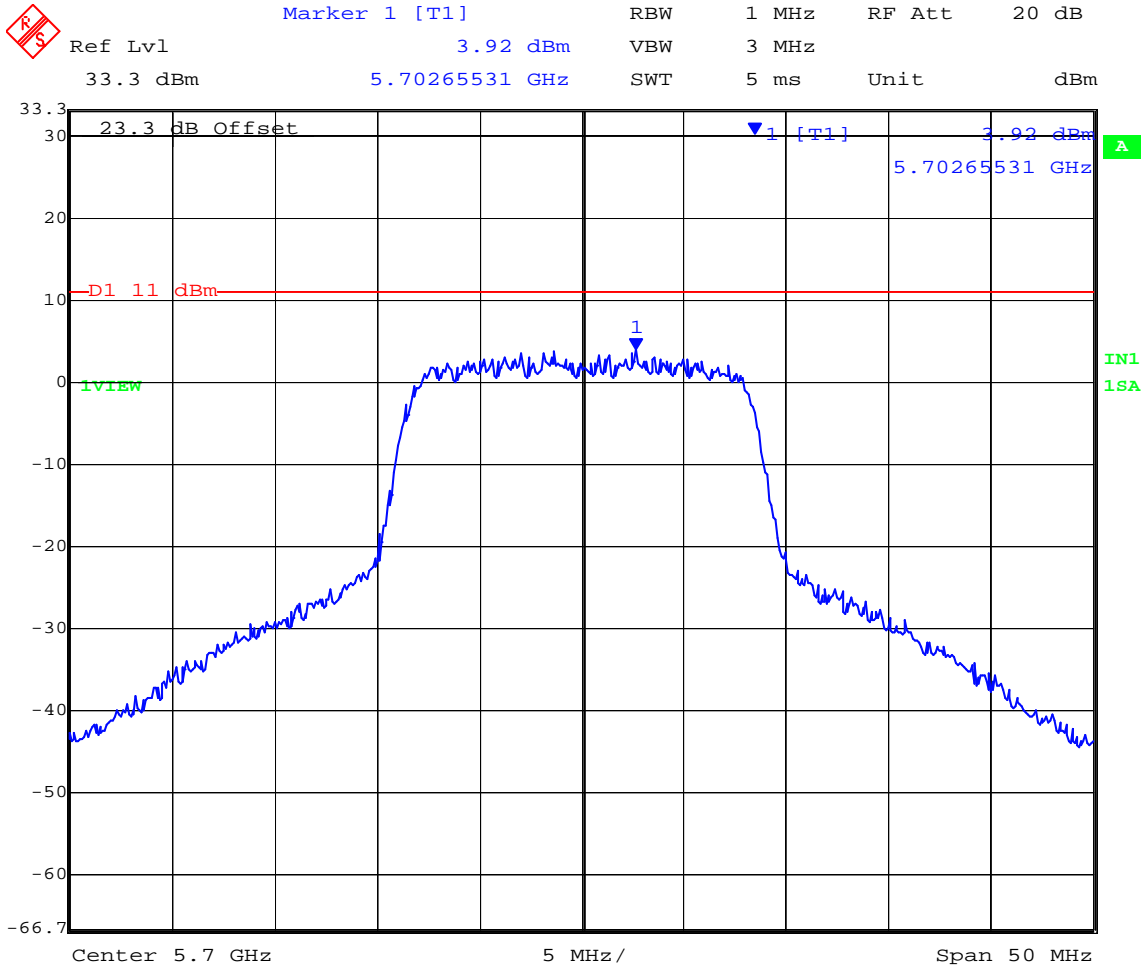

Date: 10.NOV.2007 15:58:44


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11n HT20

Center Frequency (MHz)	Peak Frequency (MHz)	PPSD (dBm)
5,180	5178.34669	+2.70
5,200	5197.34469	+2.11
5,240	5241.45291	+1.59

5,180 MHz 802.11n HT20 Peak Power Spectral Density

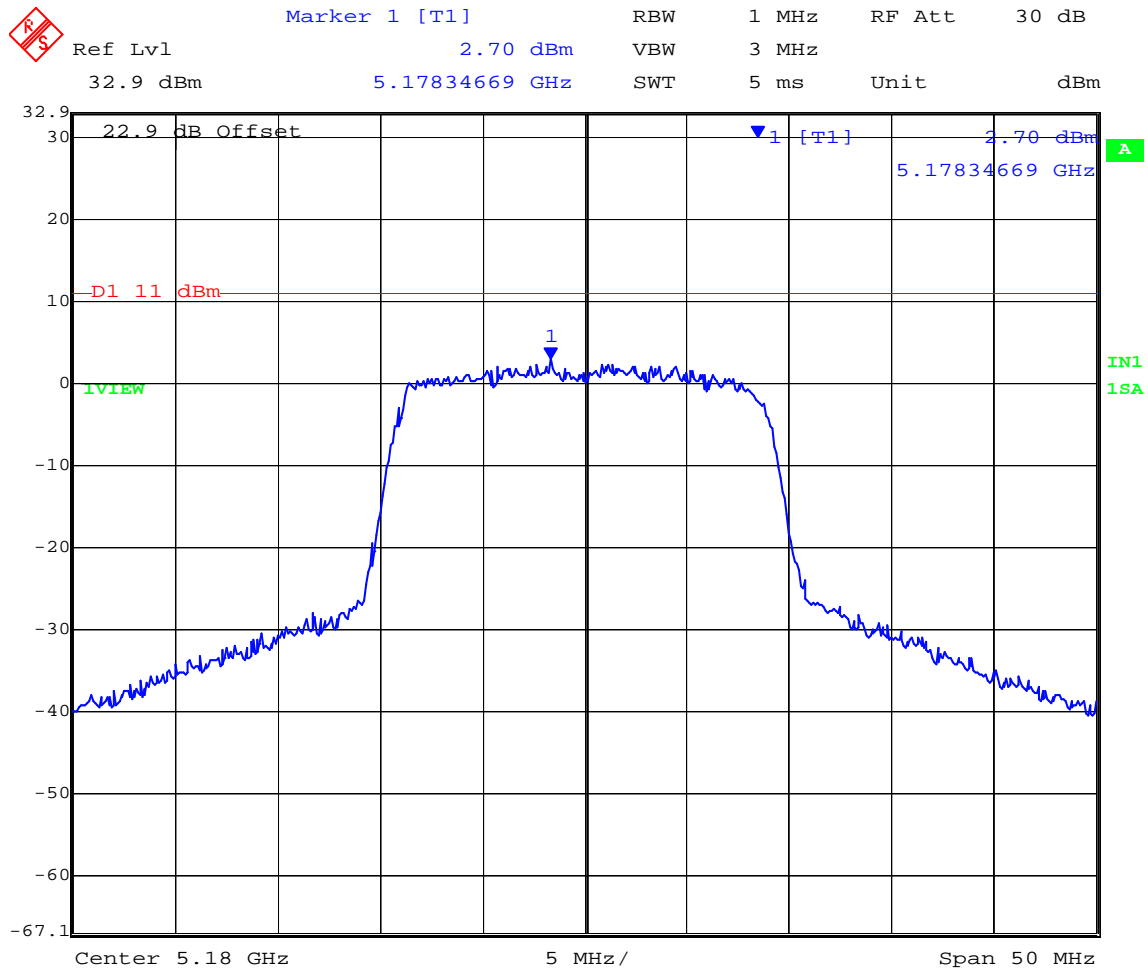


Date: 10.NOV.2007 13:41:27

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 75 of 293

5,200 MHz 802.11n HT20 Peak Power Spectral Density

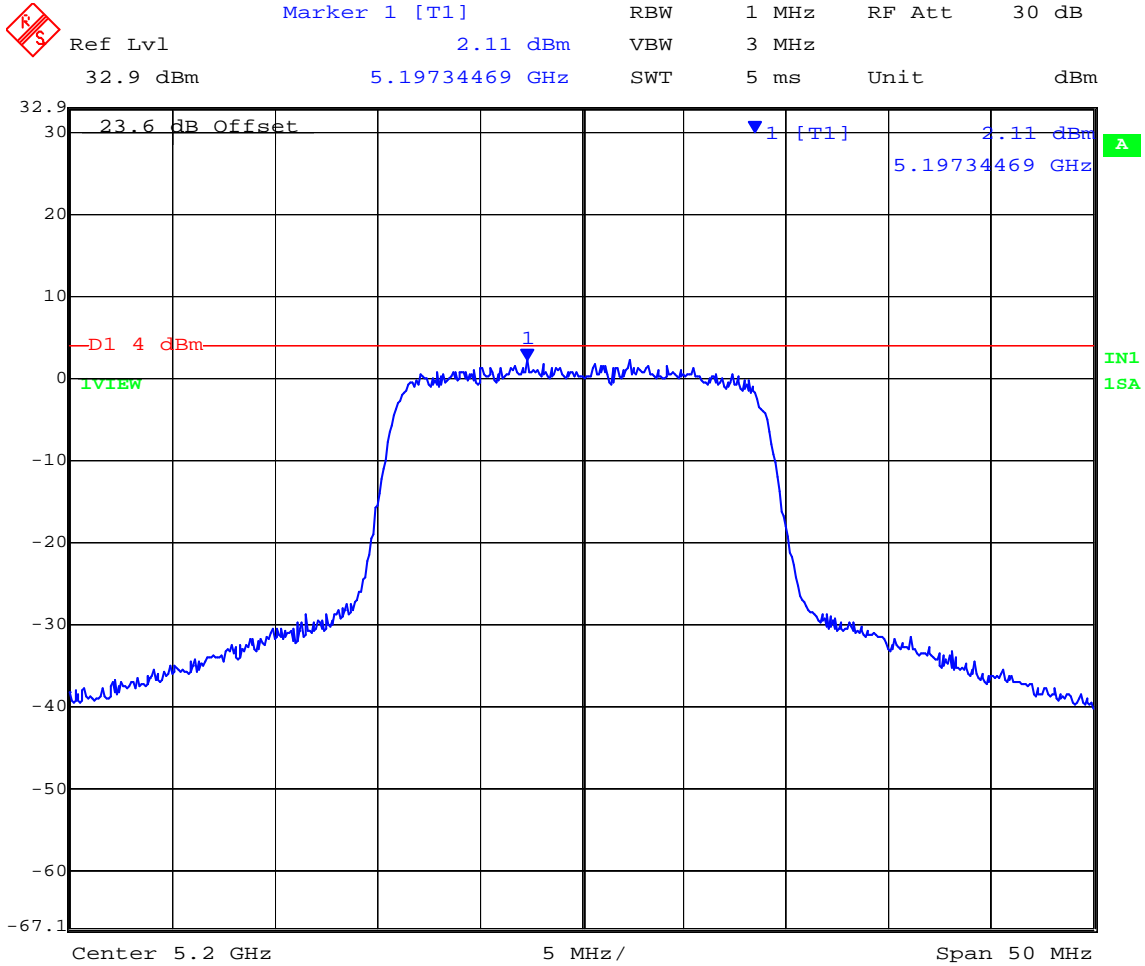


Date: 5.DEC.2007 19:33:50

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 76 of 293

5,240 MHz 802.11n HT20 Peak Power Spectral Density

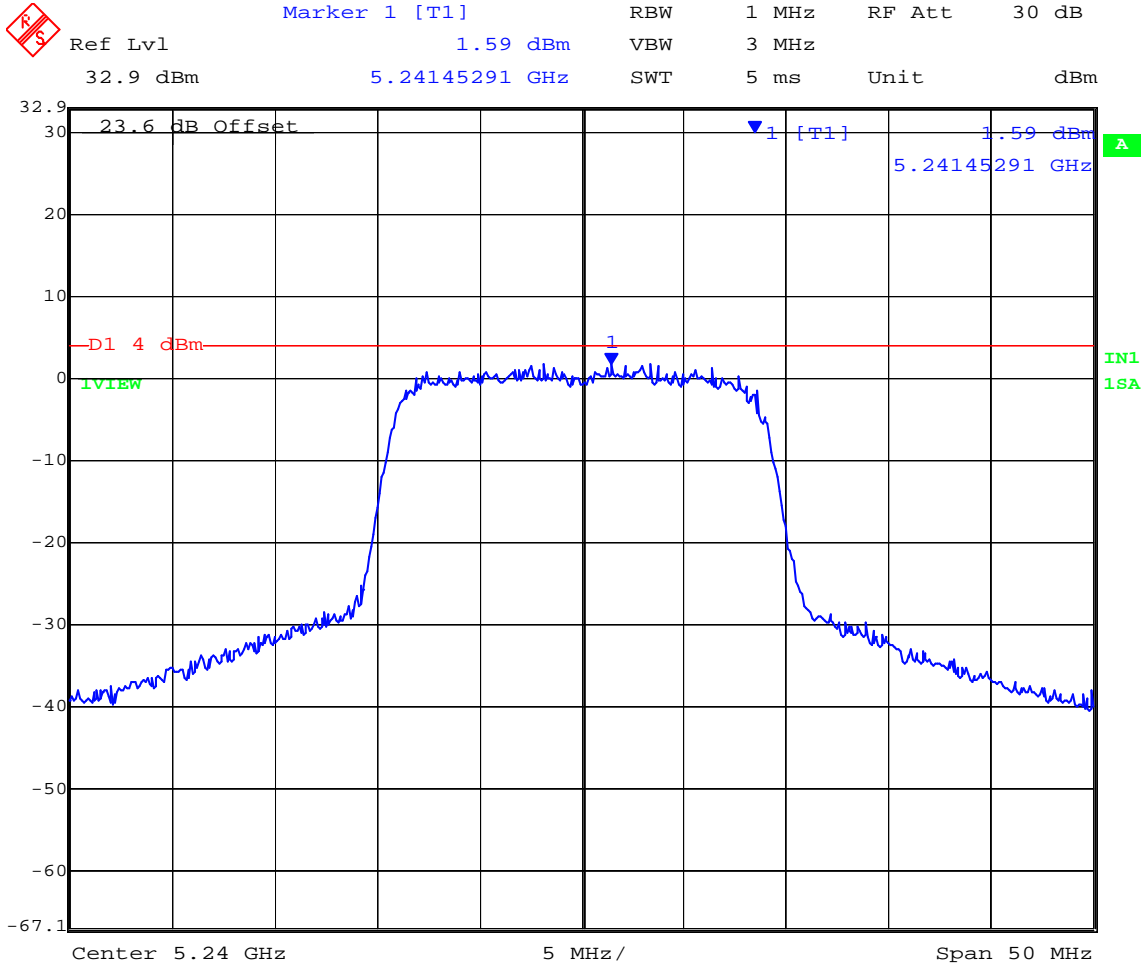

Date: 5.DEC.2007 19:34:46


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11n HT20

Center Frequency (MHz)	Peak Frequency (MHz)	PPSD (dBm)
5,260	5261.75351	+1.80
5,300	5297.84569	+1.30
5,320	5317.84569	+1.77

5,260 MHz 802.11n HT20 Peak Power Spectral Density

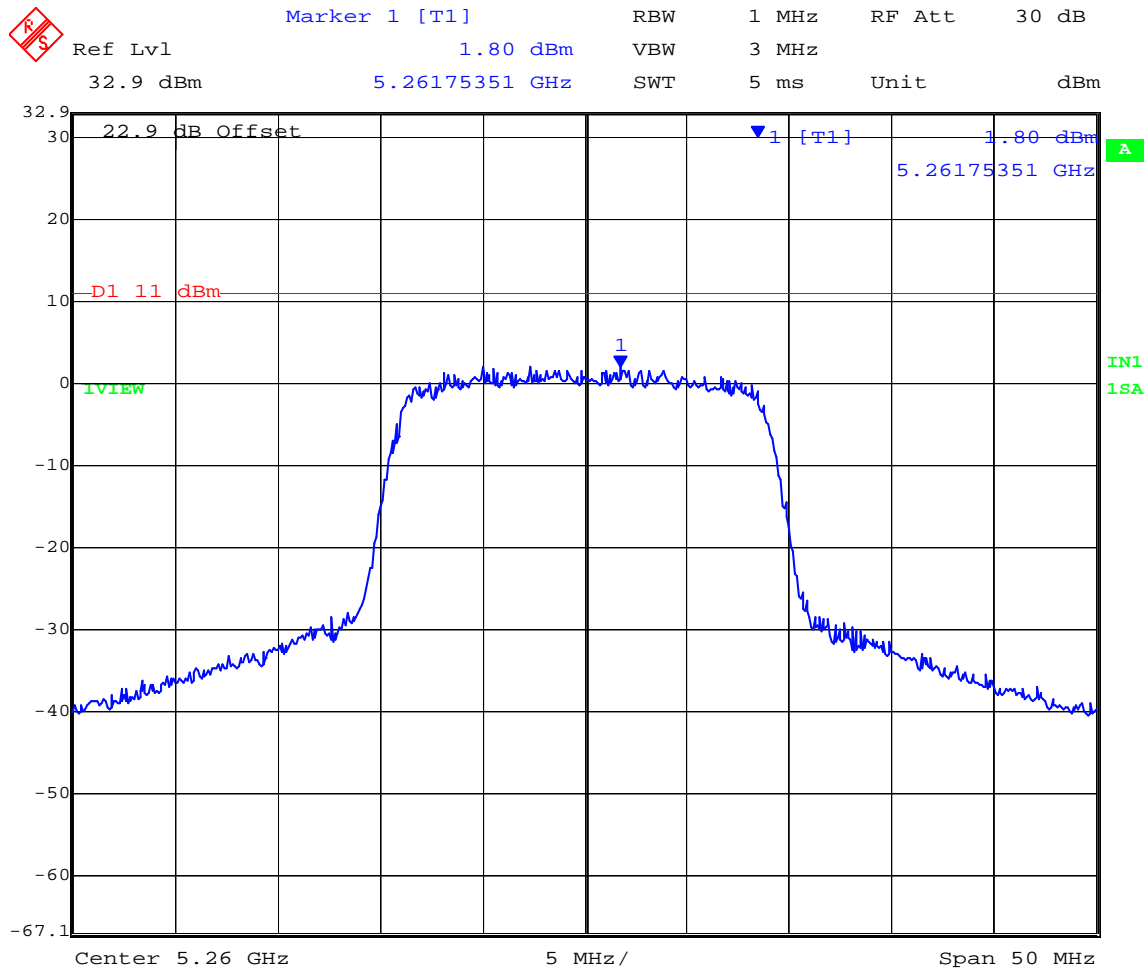


Date: 10.NOV.2007 13:40:46

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 78 of 293

5,300 MHz 802.11n HT20 Peak Power Spectral Density

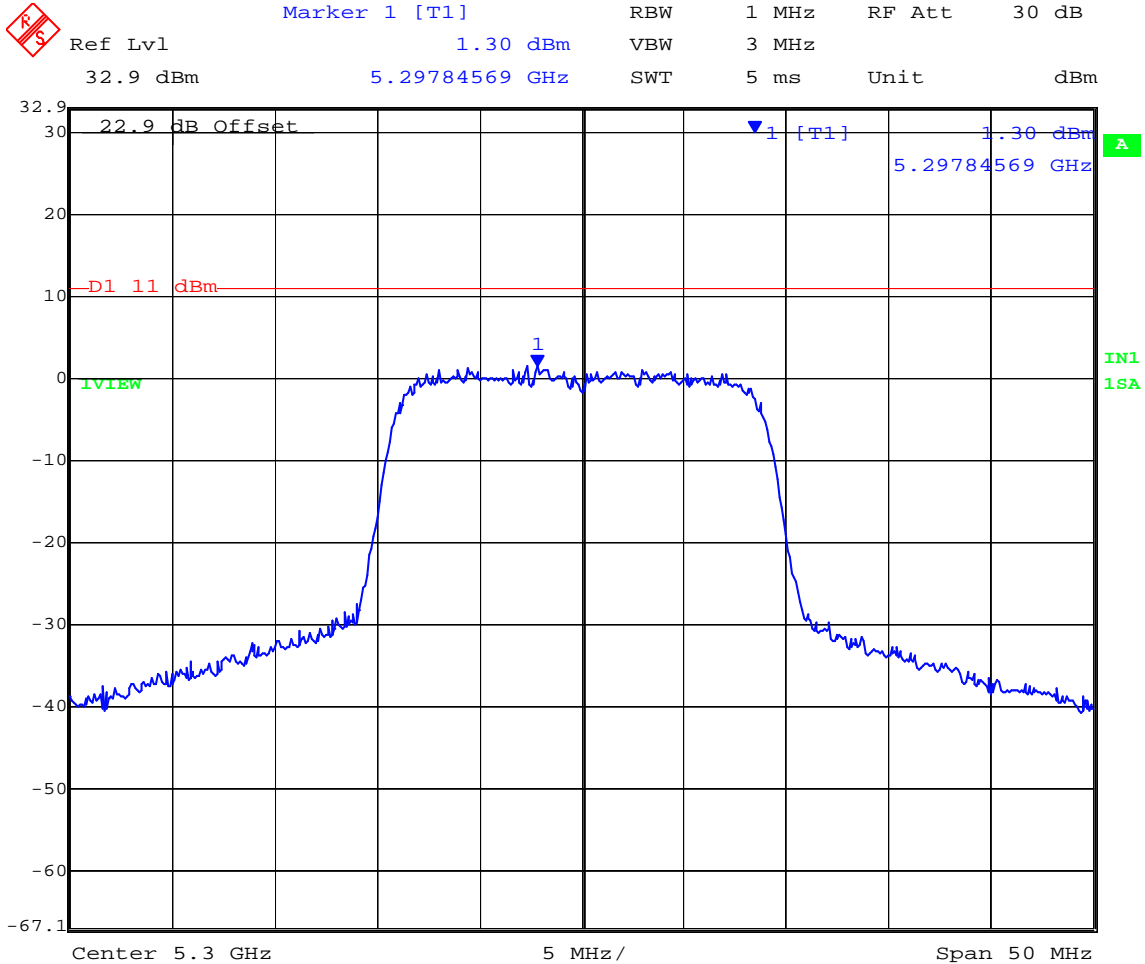


Date: 10.NOV.2007 13:39:12

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5,320 MHz 802.11n HT20 Peak Power Spectral Density

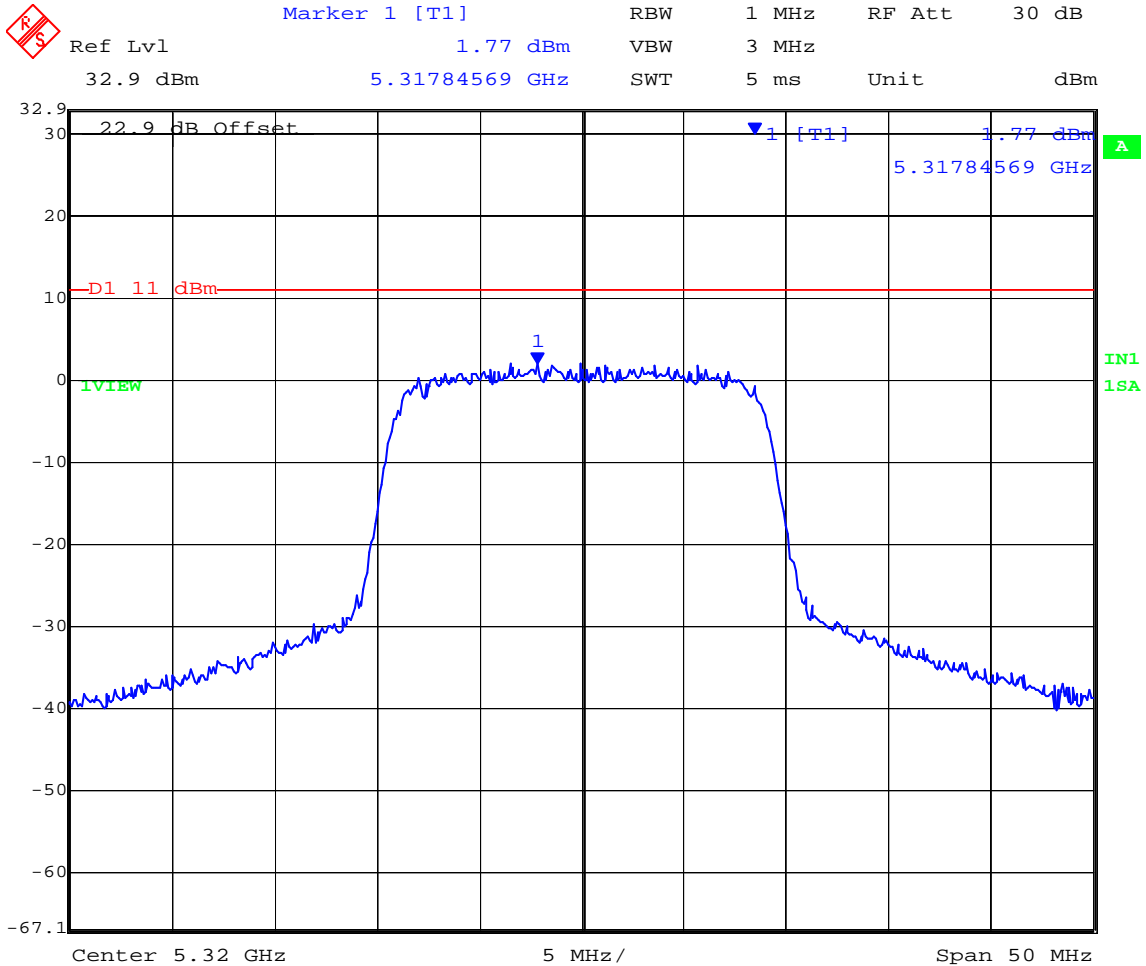

Date: 10.NOV.2007 13:38:07


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11n HT20

Center Frequency (MHz)	Peak Frequency (MHz)	PPSD (dBm)
5,500	5500.95190	+2.41
5,600	5597.64529	+2.90
5,700	5700.75150	+2.74

5,500 MHz 802.11n HT20 Peak Power Spectral Density

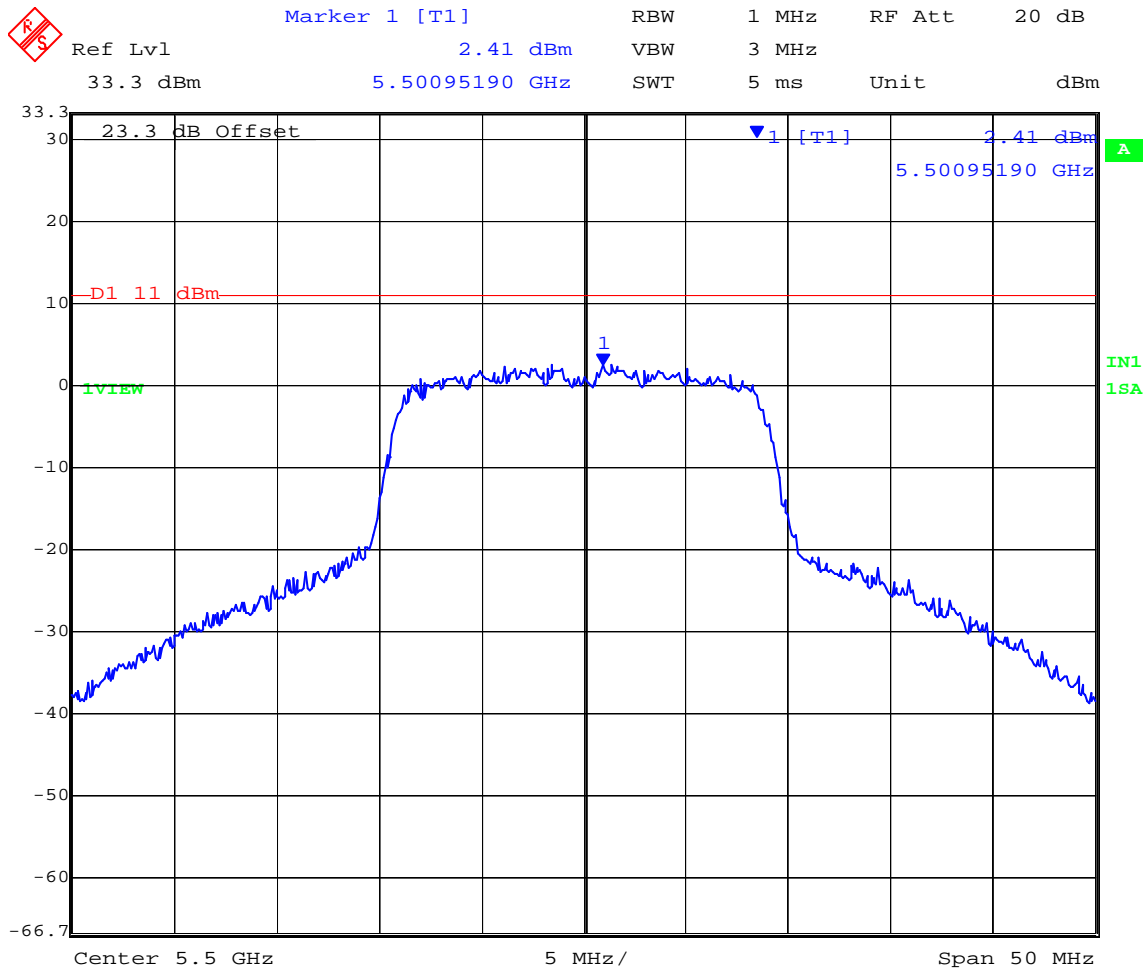


Date: 10.NOV.2007 15:31:53

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5,600 MHz 802.11n HT20 Peak Power Spectral Density

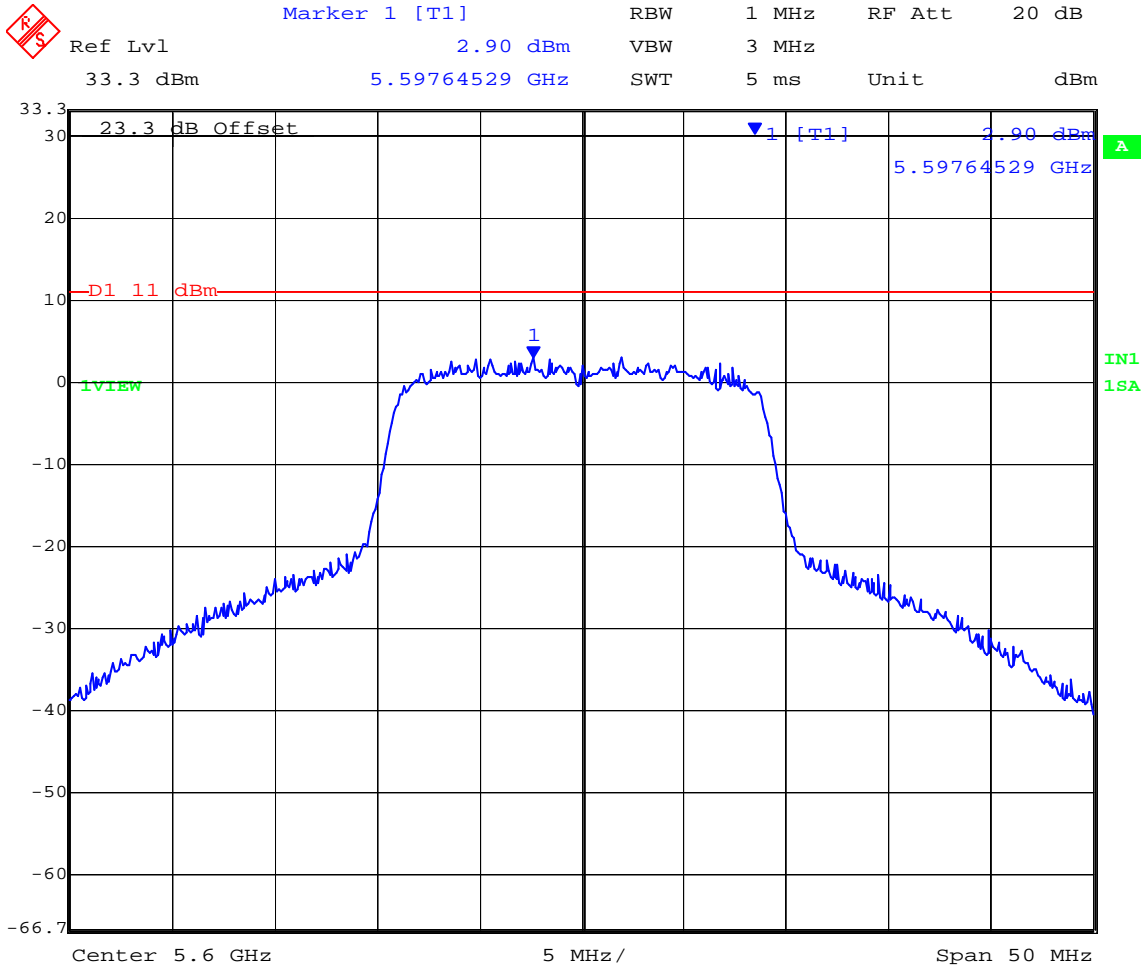


Date: 10.NOV.2007 15:33:00

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5,700 MHz 802.11n HT20 Peak Power Spectral Density

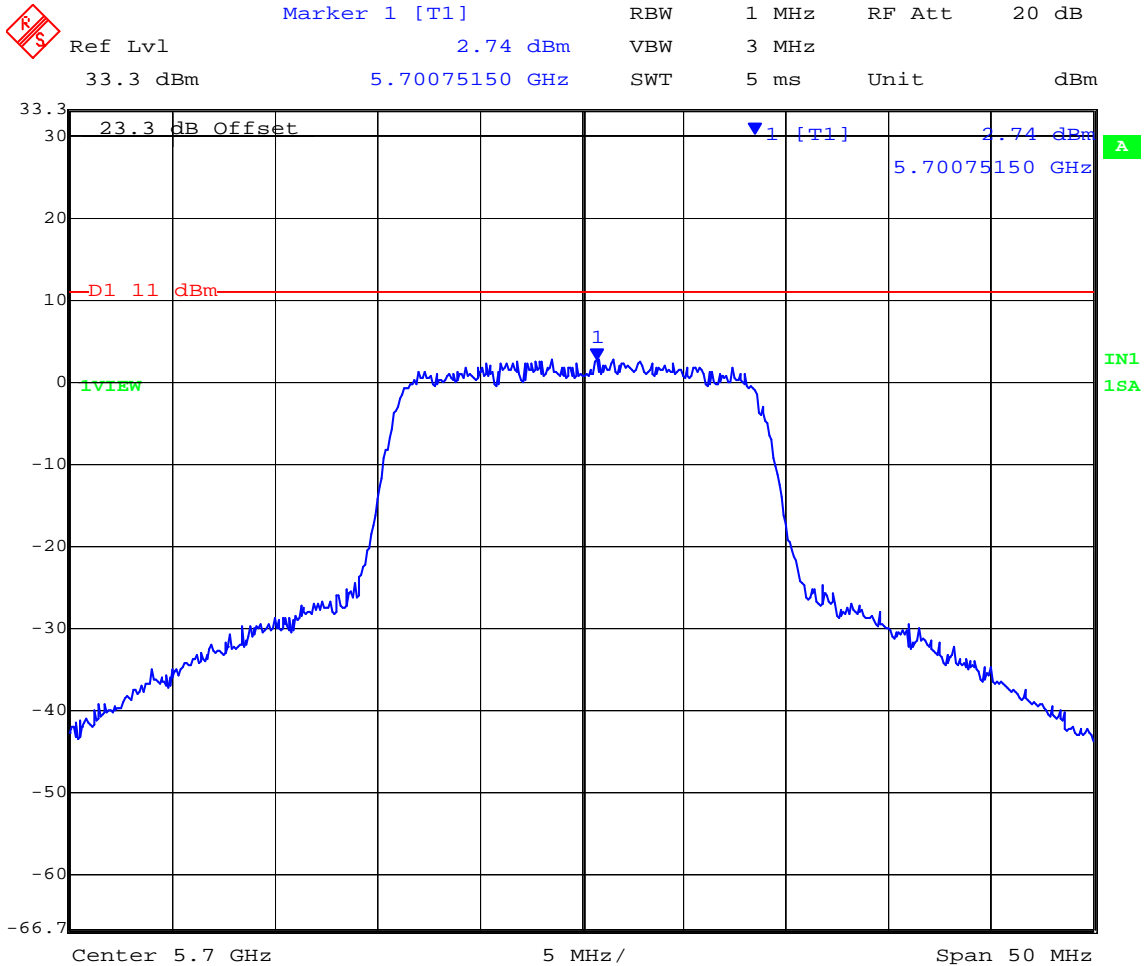

Date: 10.NOV.2007 15:33:37


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11n HT40

Center Frequency (MHz)	Peak Frequency (MHz)	PPSD (dBm)
5,190	5194.43387	-1.71
5,230	5223.61222	-1.59

5,190 MHz 802.11n HT40 Peak Power Spectral Density

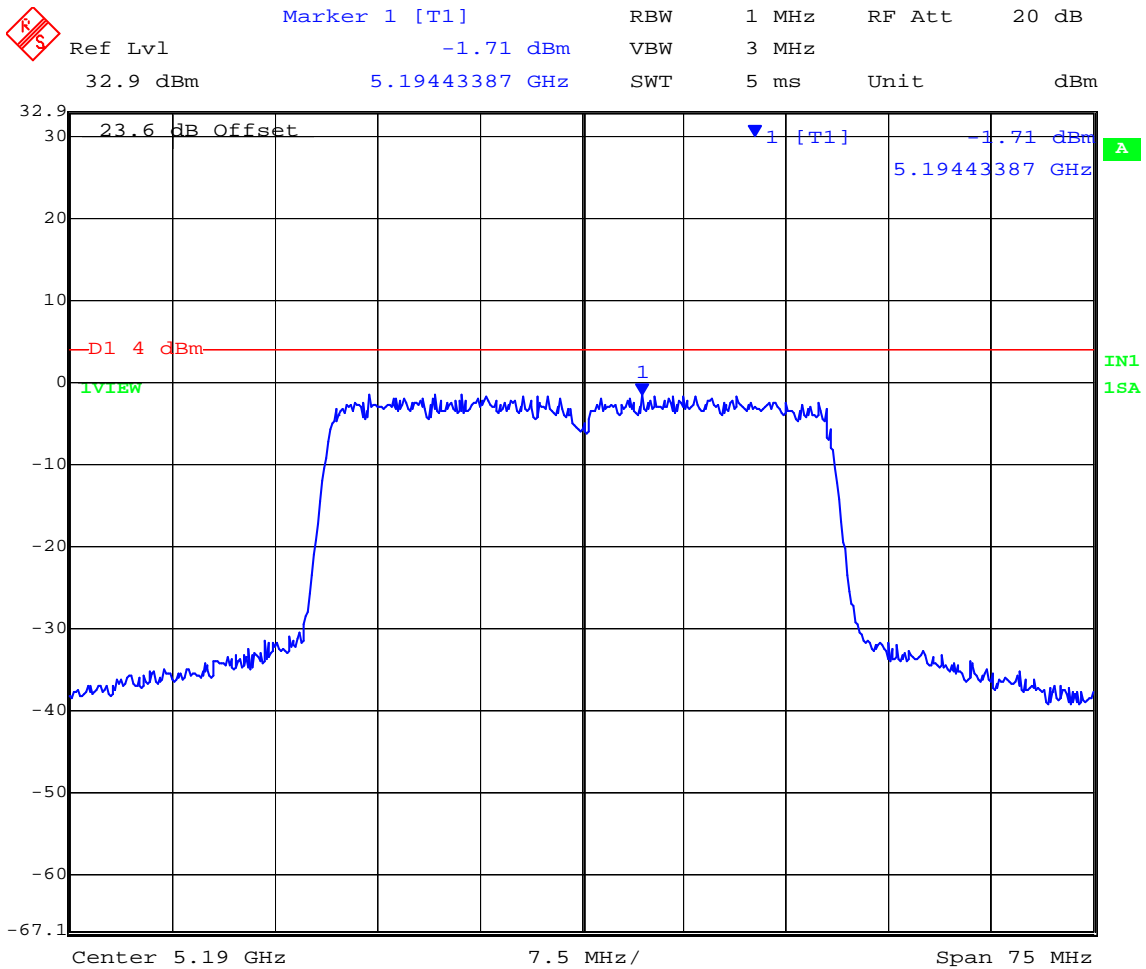


Date: 5.DEC.2007 20:35:12

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5,230 MHz 802.11n HT40 Peak Power Spectral Density

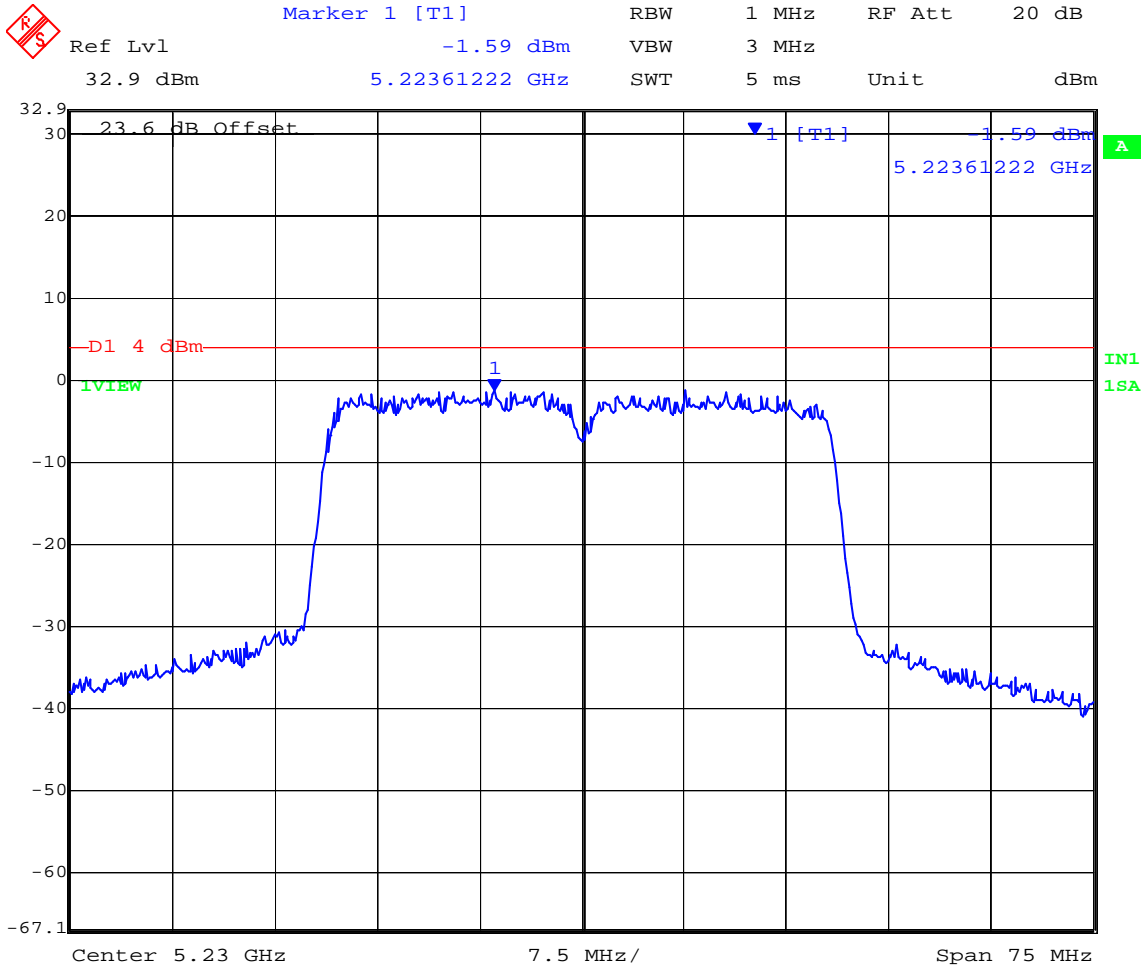

Date: 5.DEC.2007 20:34:24


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11n HT40

Center Frequency (MHz)	Peak Frequency (MHz)	PPSD (dBm)
5,270	5263.91283	-1.65
5,310	5300.60621	-1.47

5,270 MHz 802.11n HT40 Peak Power Spectral Density

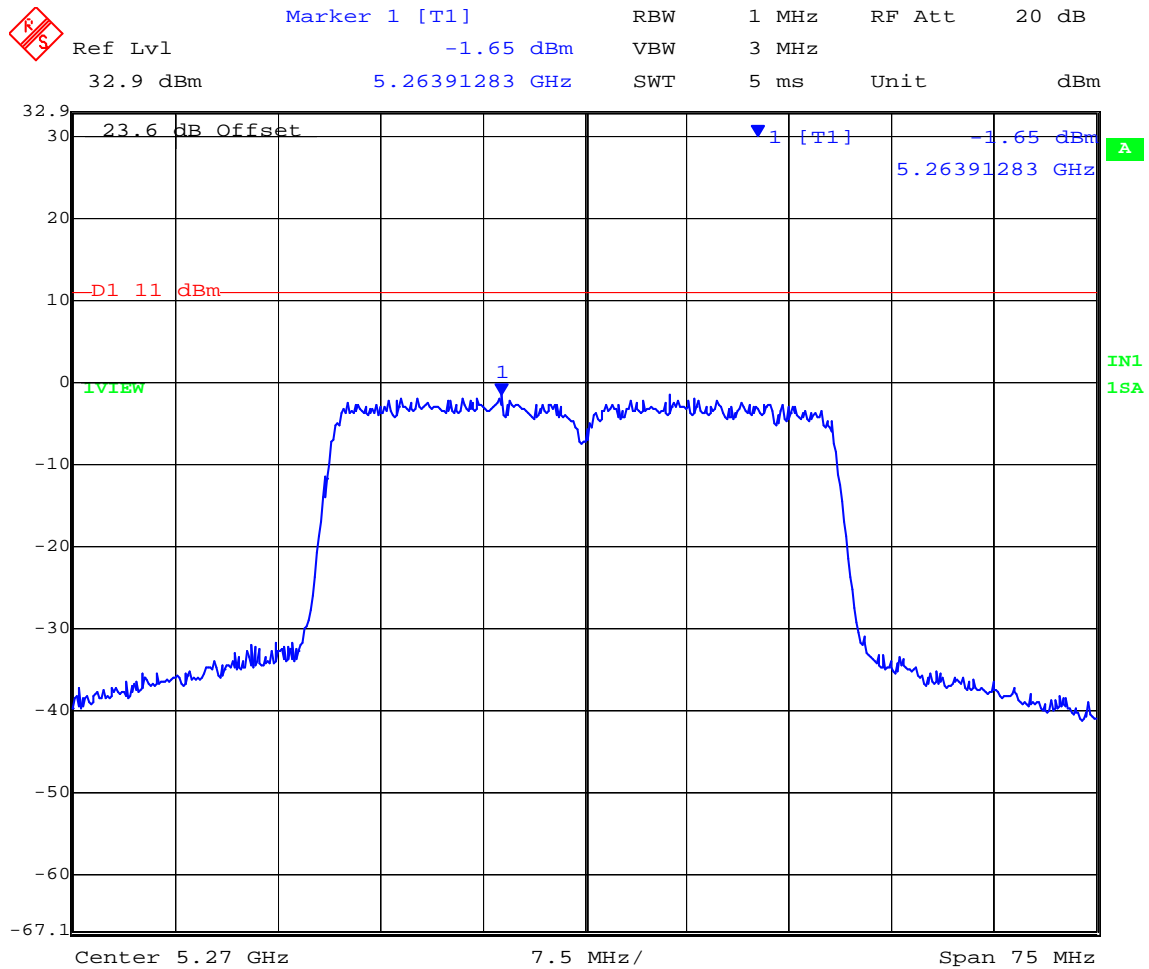


Date: 5.DEC.2007 20:33:35

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 86 of 293

5,310 MHz 802.11n HT40 Peak Power Spectral Density

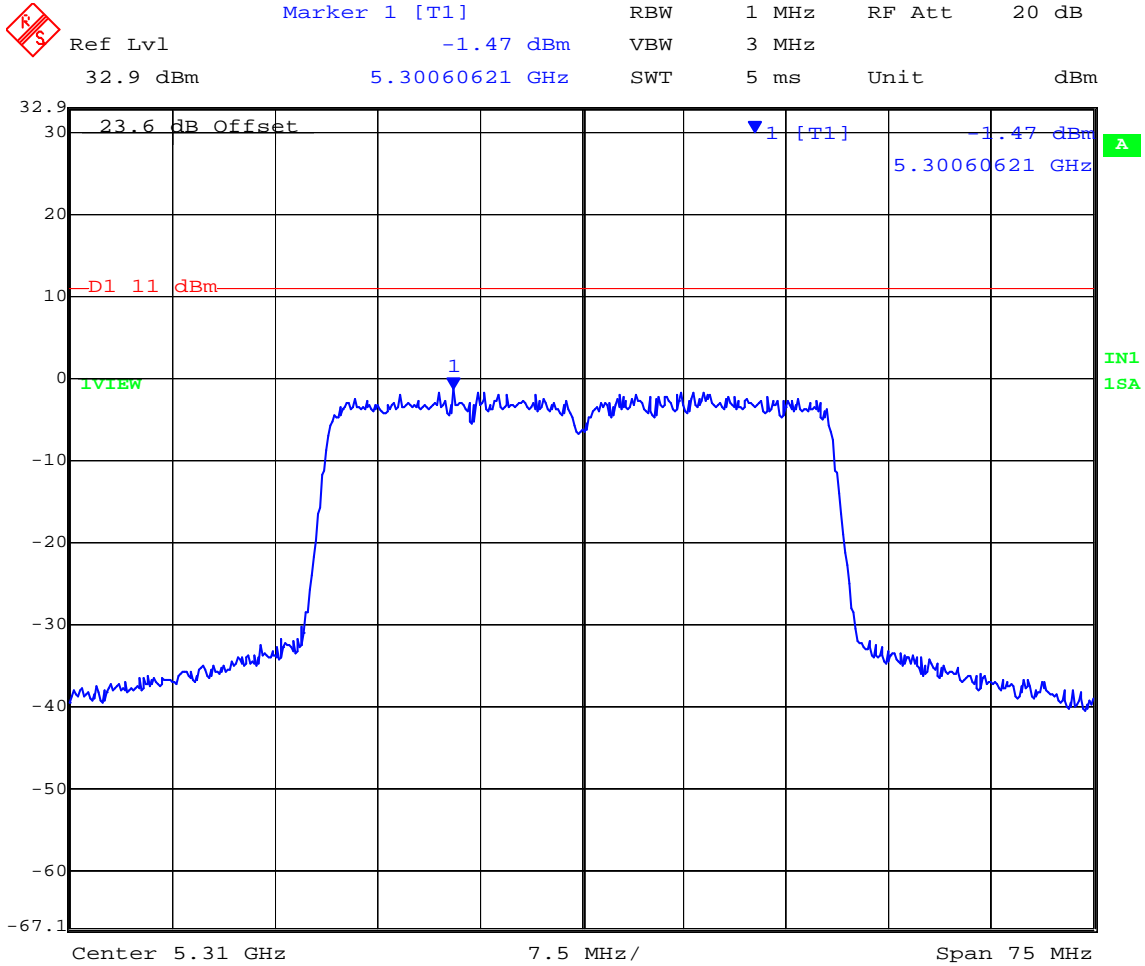

Date: 5.DEC.2007 20:32:49


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11n HT40

Center Frequency (MHz)	Peak Frequency (MHz)	PPSD (dBm)
5,510	5505.86673	-0.70
5,620	5607.90080	-0.27
5,690	5700.29559	-1.24

5,510 MHz 802.11n HT40 Peak Power Spectral Density

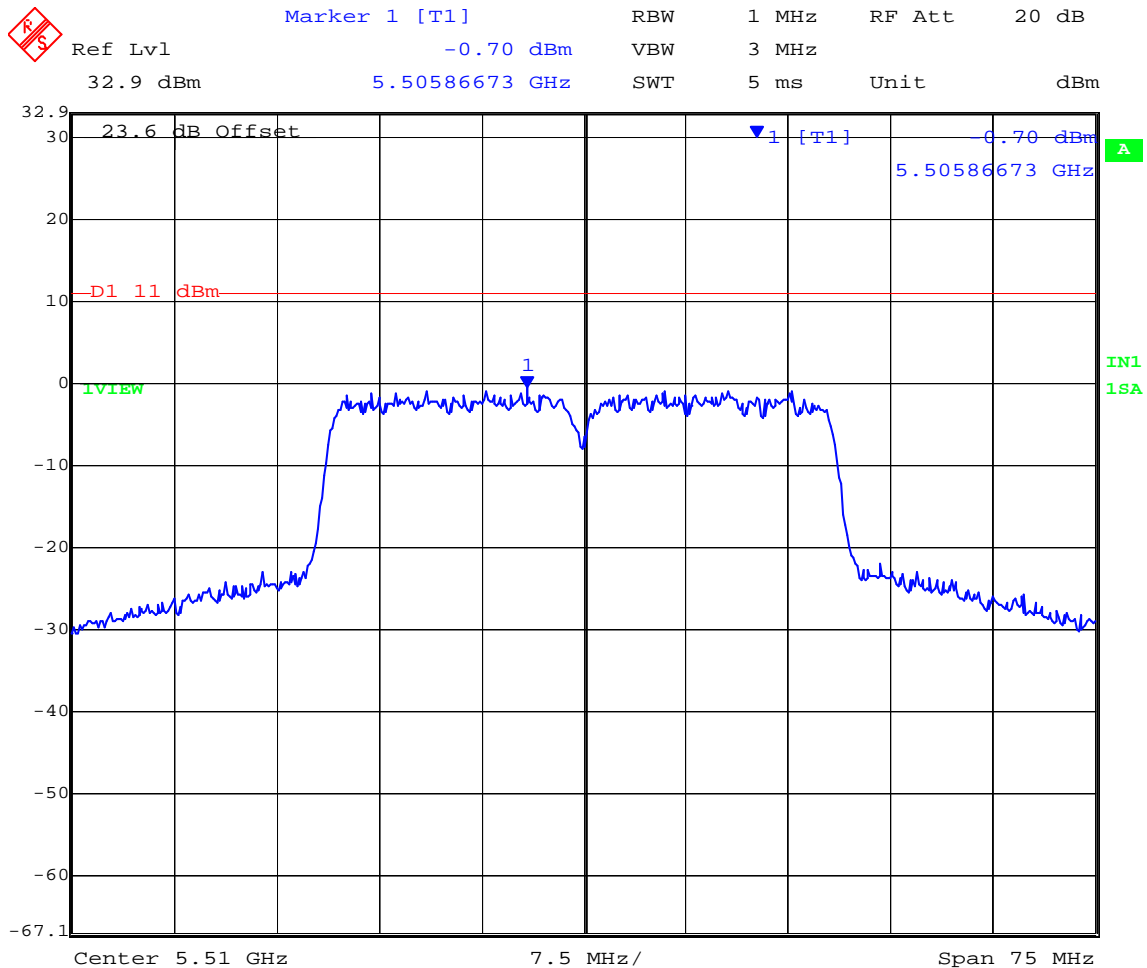


Date: 5.DEC.2007 20:31:53

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 88 of 293

5,620 MHz 802.11n HT40 Peak Power Spectral Density

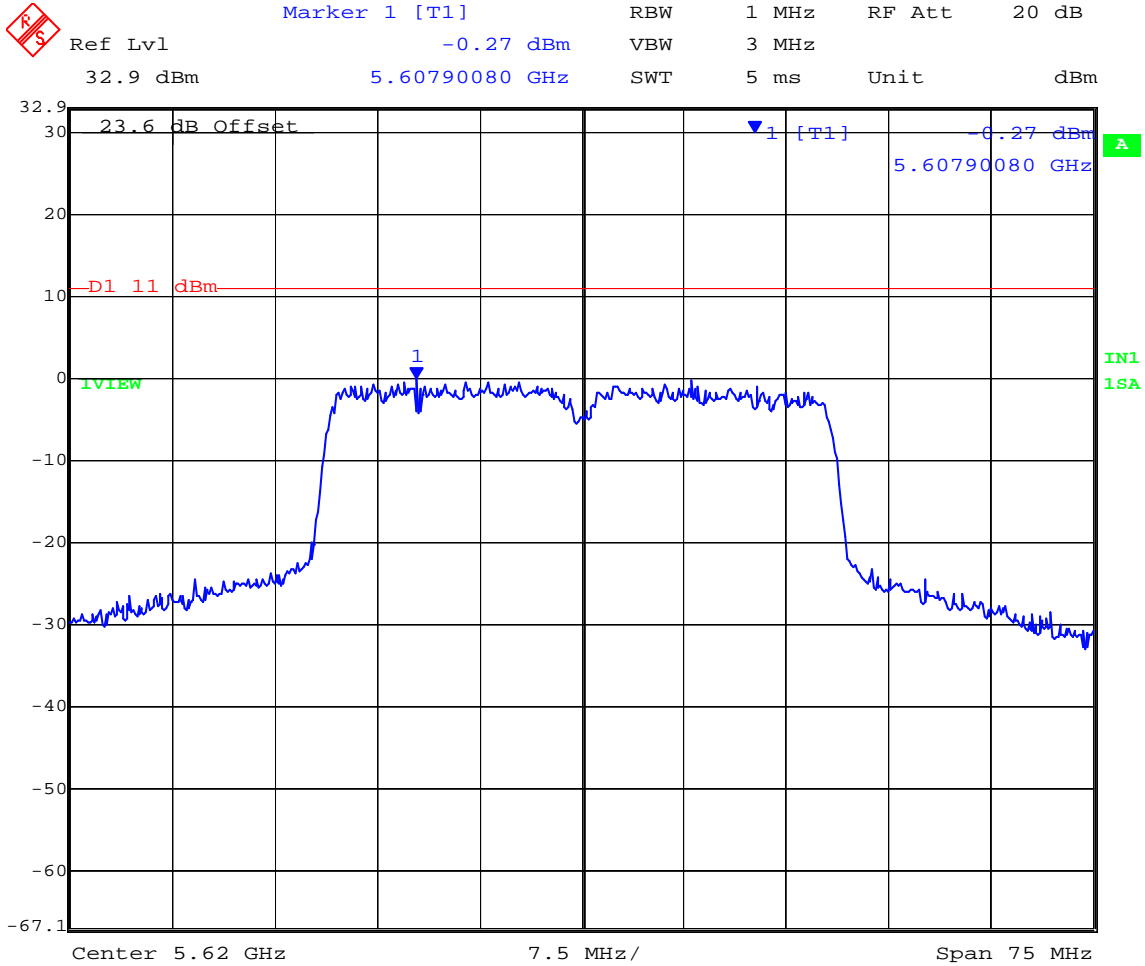


Date: 5.DEC.2007 20:31:06

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5,690 MHz 802.11n HT40 Peak Power Spectral Density

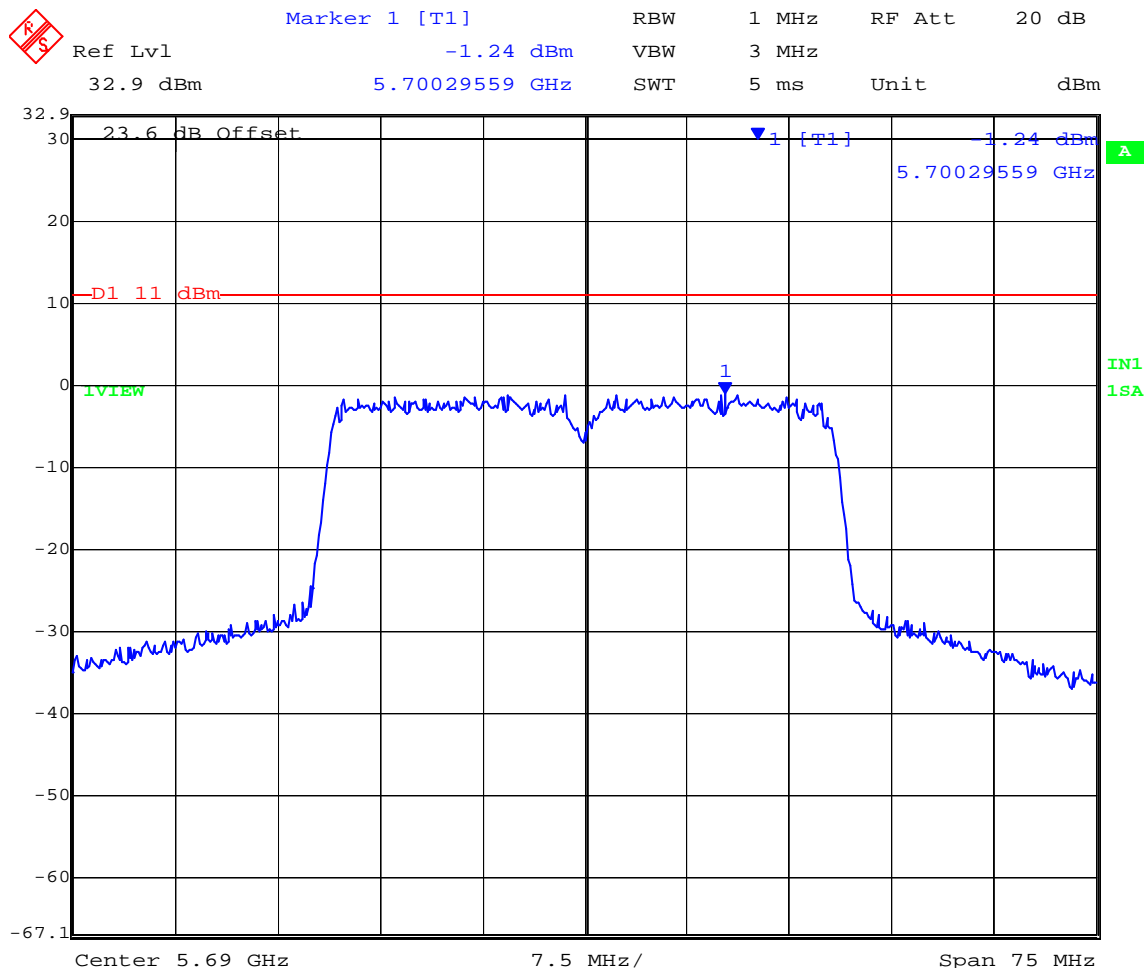

Date: 5.DEC.2007 20:29:51

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 90 of 293

Specification

FCC, Part 15 §15.407 (a)(1), (a)(2)

(a)(1) The peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

(a)(2) The peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

Industry Canada RSS-210 § A9.2(1), A9.2(2)

§ **A9.2(1)** The eirp spectral density shall not exceed +10 dBm in any 1 MHz band

§ **A9.2(2)** The power spectral density shall not exceed +11 dBm in any 1 MHz band

Laboratory Measurement Uncertainty for Spectral Density

Measurement uncertainty	±1.33 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-01 'Measuring RF Output Power'	0158, 0193, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5.1.4. Peak Excursion Ratio

FCC, Part 15 Subpart C §15.407(a)(6)

Test Procedure

Normative Reference (xi) Section 2.1 Measurement Procedure DA 02-2138 “Measurement Procedure Updated for Peak Transmit Power in the UNII Bands” was implemented to determine the Peak Excursion Ratio. This is a conducted measurement using a spectrum analyzer. The Peak Excursion Ratio is the difference in amplitude (dB) between the two traces.

Test Measurement Set up

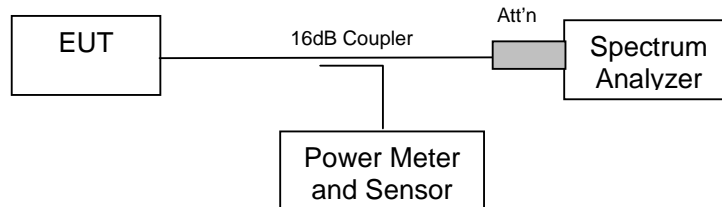

Measurement set up for Peak Excursion Ratio

Measurement Results for Peak Excursion Ratio

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57% Pressure: 999 to 1012 mbar

Radio Parameters

Duty Cycle: 100%

Output: Modulated Carrier


Power: Maximum Default Power



TABLE OF RESULTS – 802.11a Legacy


Centre Frequency (MHz)	Peak Excursion Ratio (dB)
5,180	9.40
5,200	10.97
5,240	10.80

5,180 MHz 802.11a Legacy - Peak Excursion Ratio

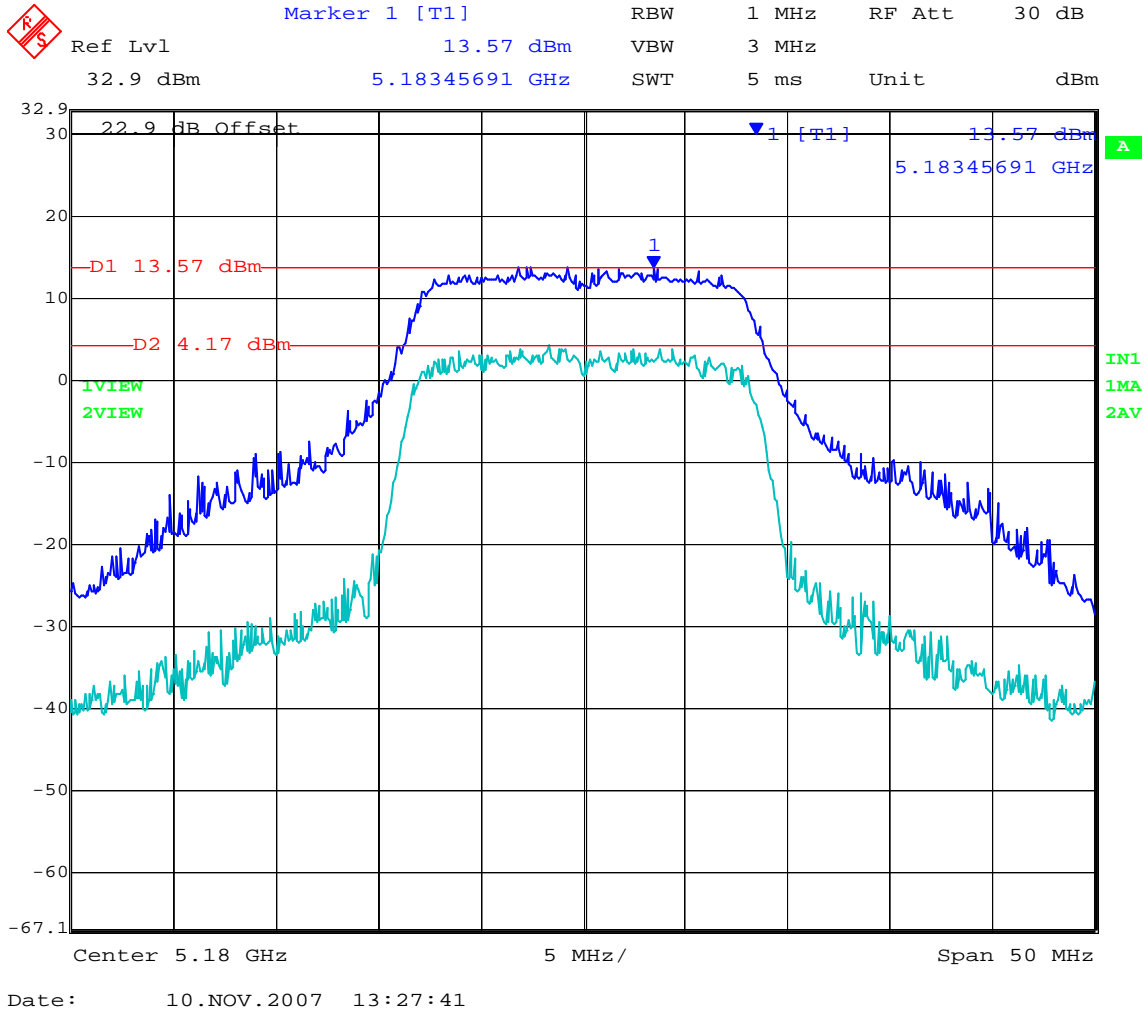

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,200 MHz 802.11a Legacy - Peak Excursion Ratio

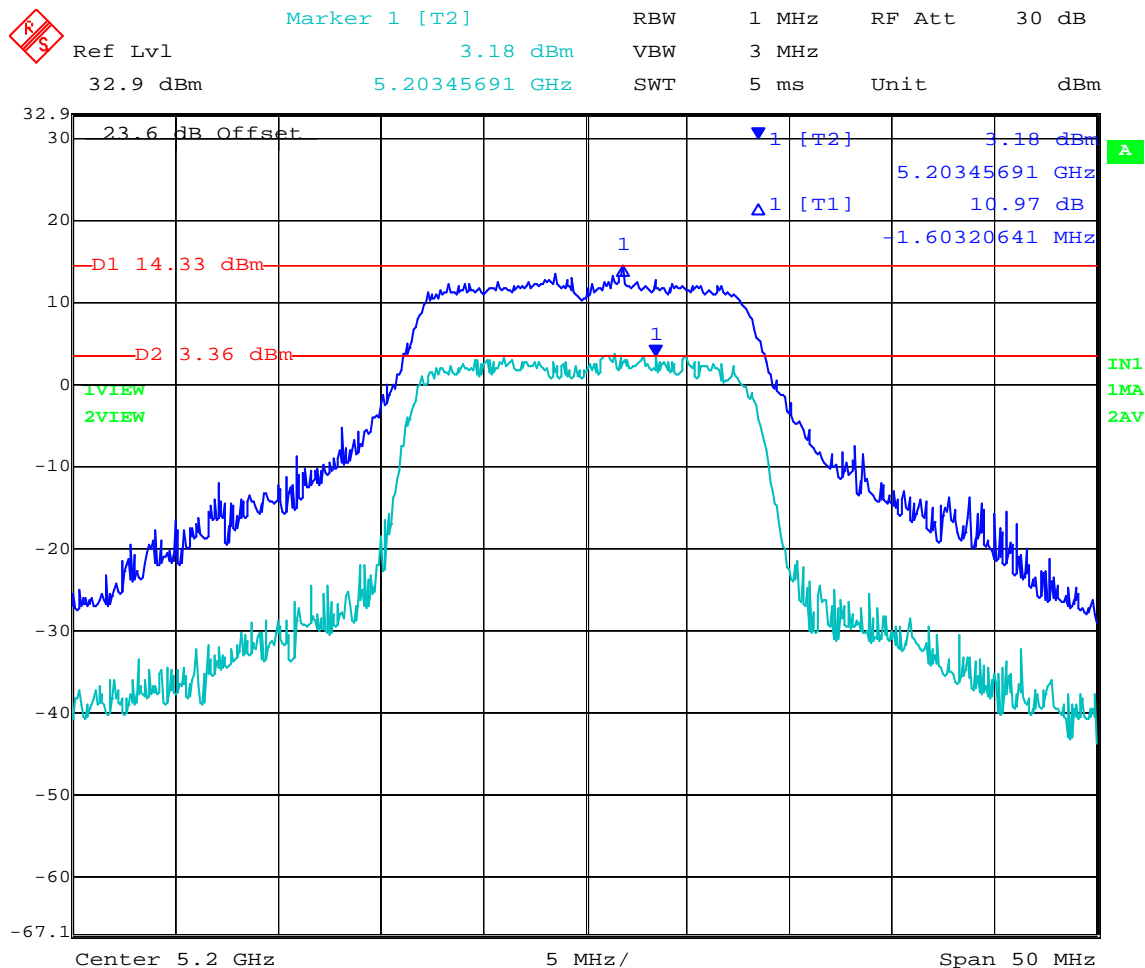


Date: 5.DEC.2007 19:46:22

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 94 of 293

5,240 MHz 802.11a Legacy - Peak Excursion Ratio

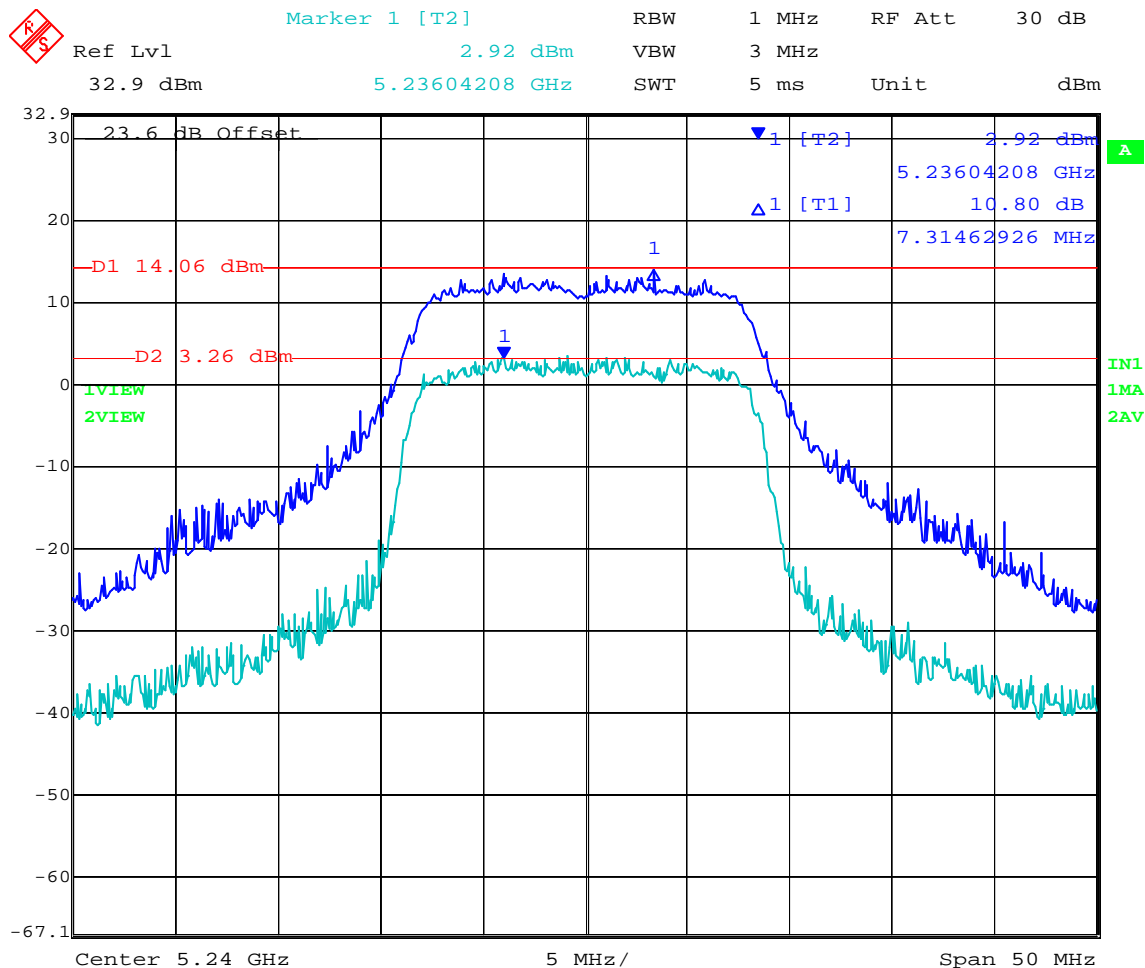

Date: 5.DEC.2007 19:49:09


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11a Legacy

Centre Frequency (MHz)	Peak Excursion Ratio (dB)
5,260	10.94
5,300	10.53
5,320	9.60


5,260 MHz 802.11a Legacy - Peak Excursion Ratio

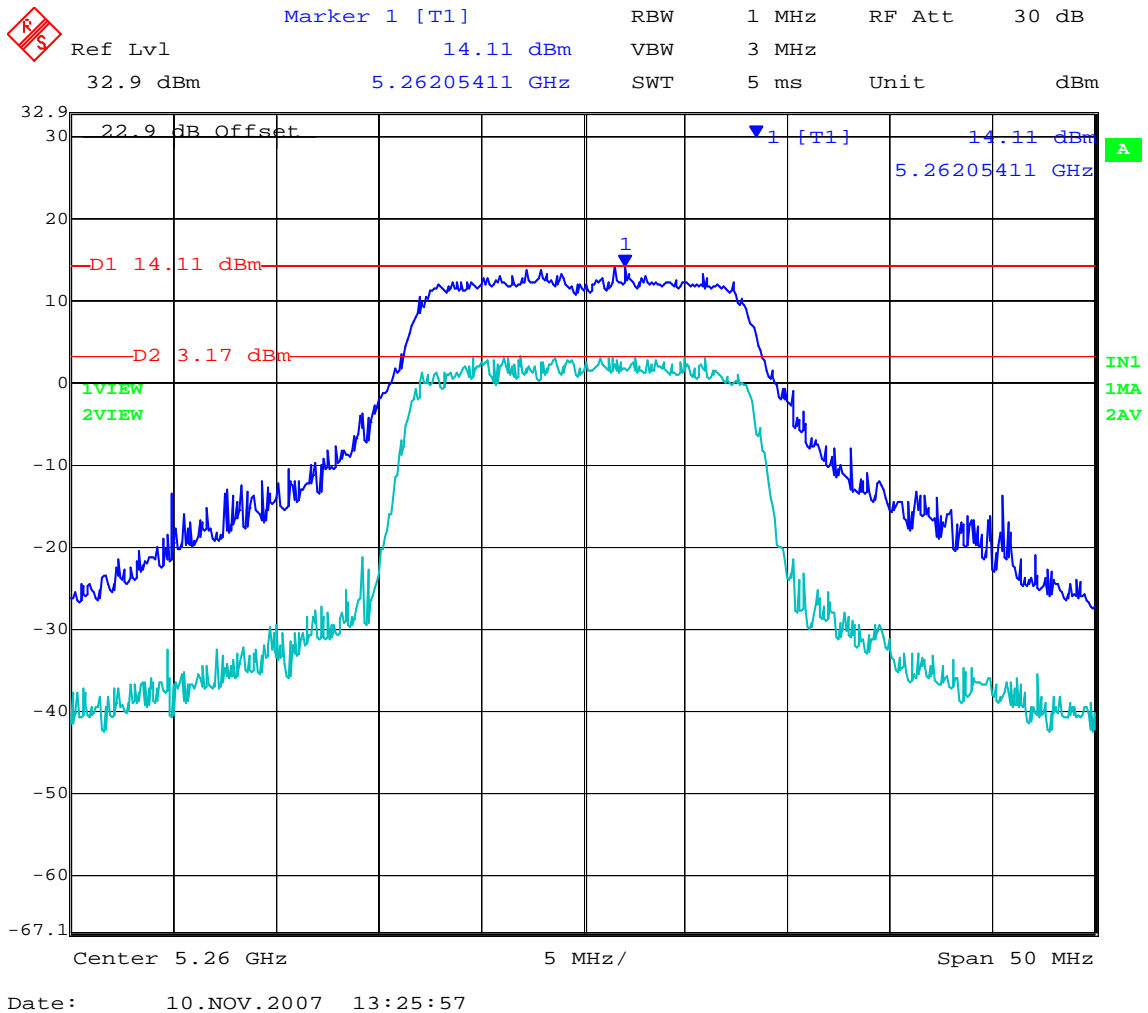

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5,300 MHz 802.11a Legacy - Peak Excursion Ratio

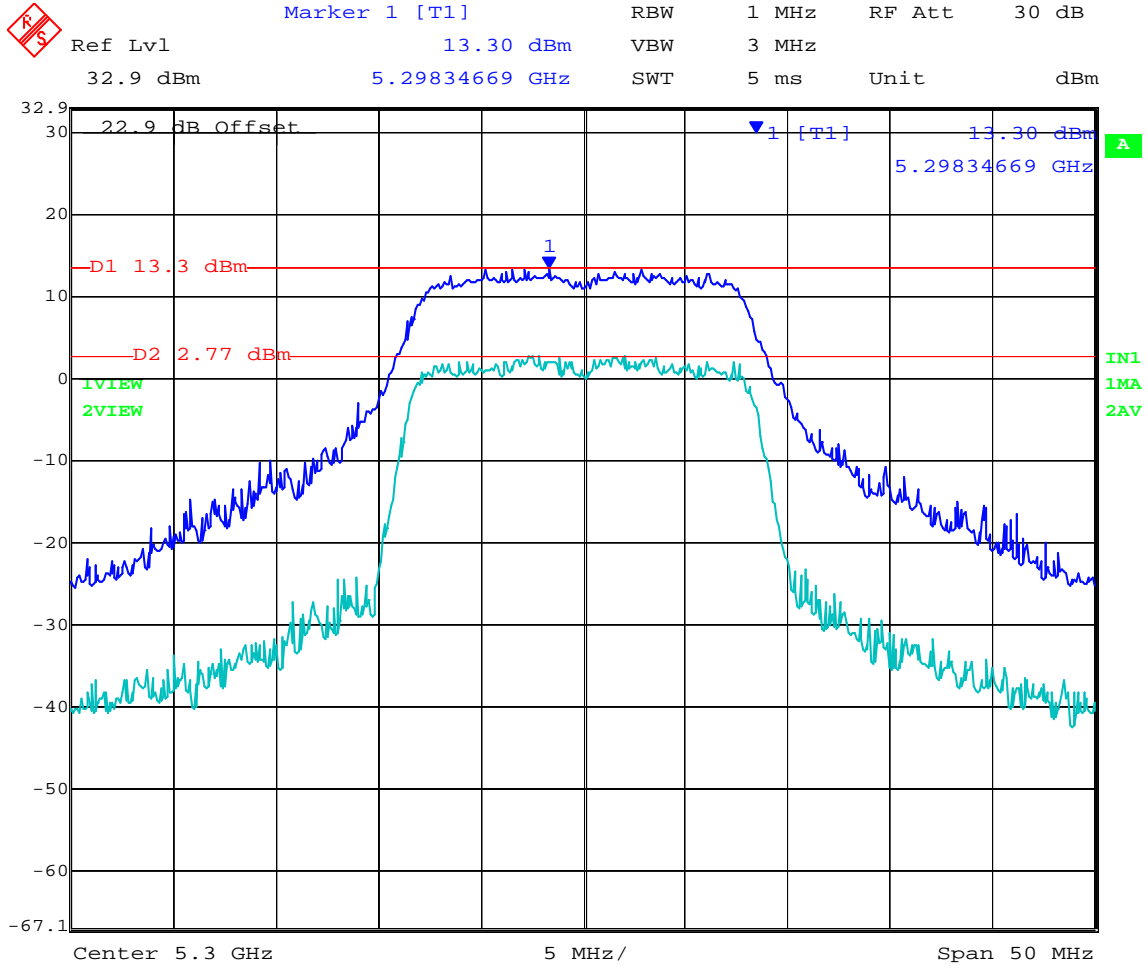


Date: 10.NOV.2007 13:23:00

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 97 of 293

5,320 MHz 802.11a Legacy - Peak Excursion Ratio

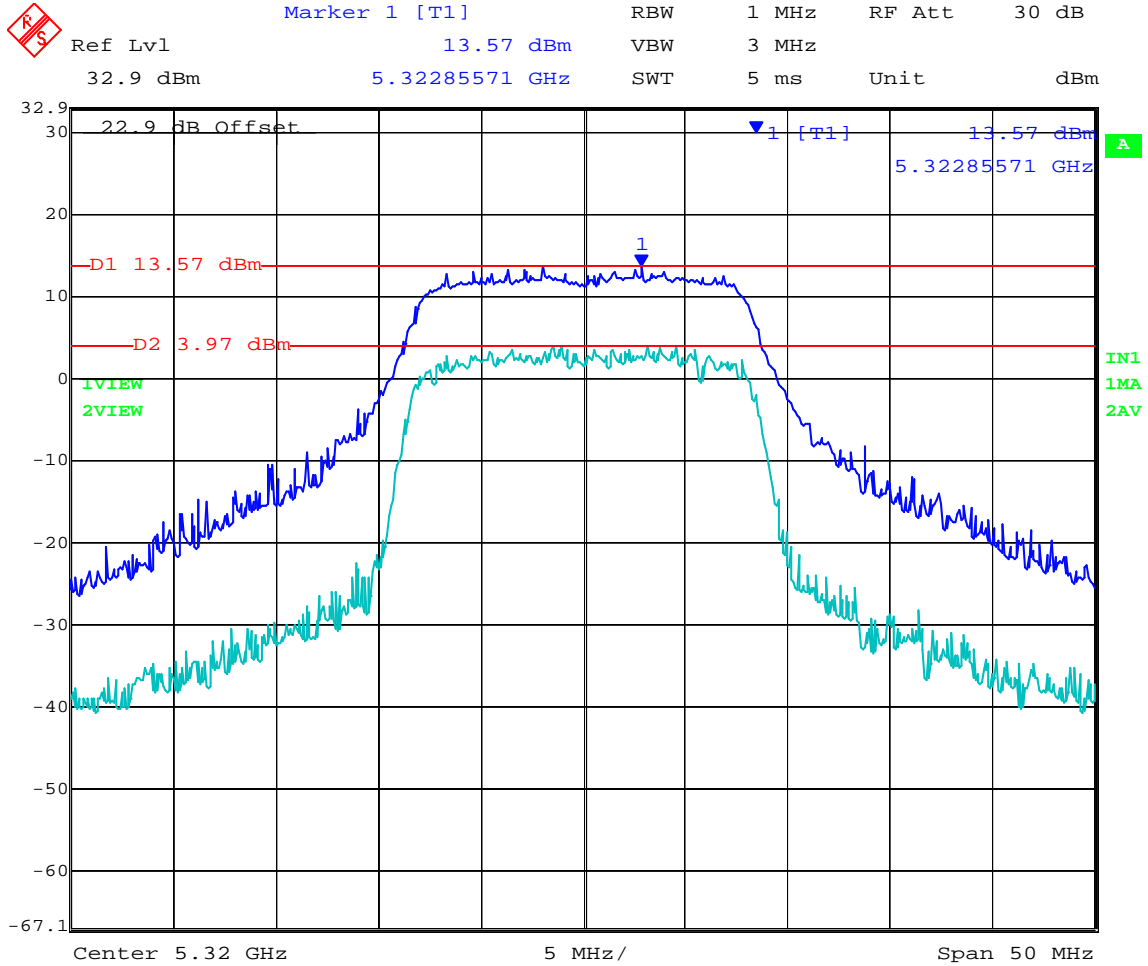

Date: 10.NOV.2007 13:20:53


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11a Legacy

Centre Frequency (MHz)	Peak Excursion Ratio (dB)
5,500	10.22
5,600	9.58
5,700	9.26


5,500 MHz 802.11a Legacy - Peak Excursion Ratio

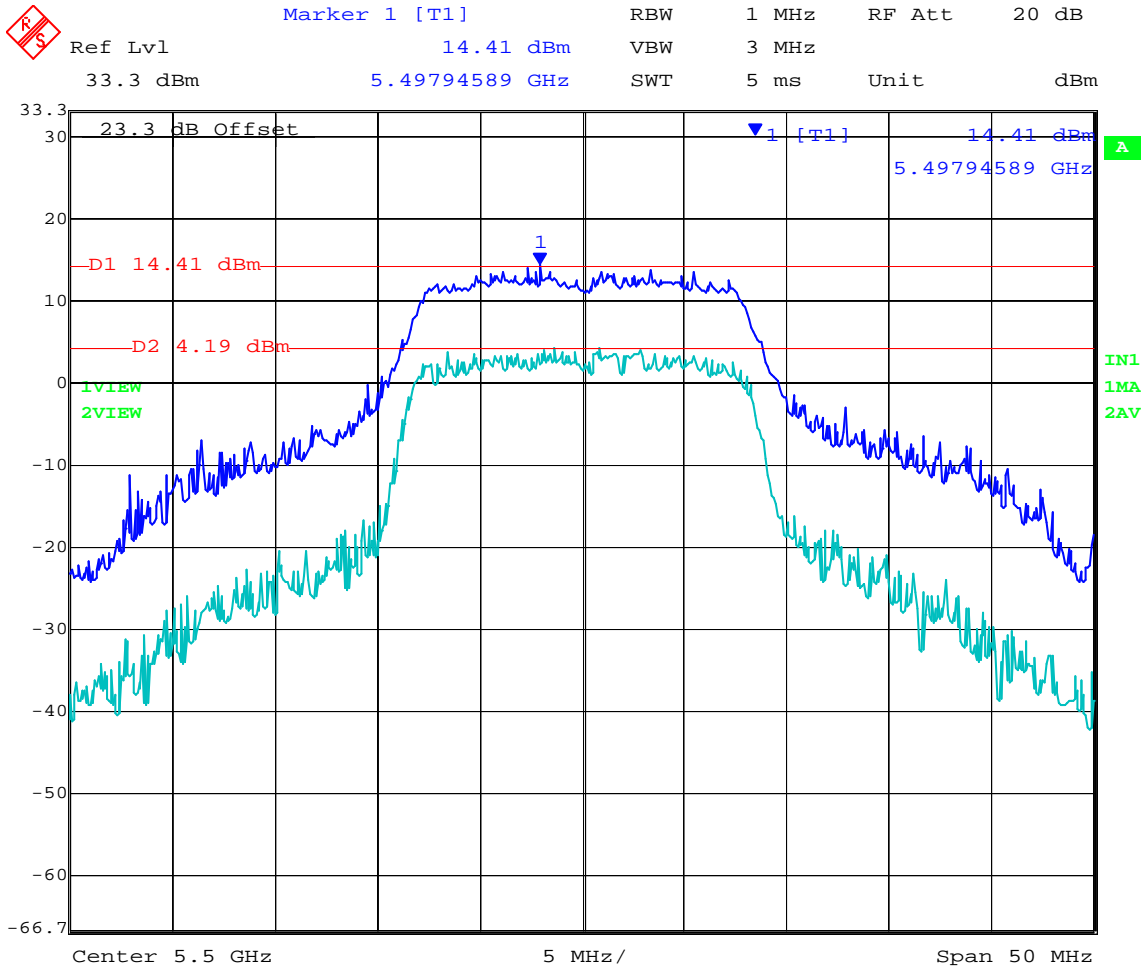

Date: 10.NOV.2007 16:03:08

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,600 MHz 802.11a Legacy - Peak Excursion Ratio

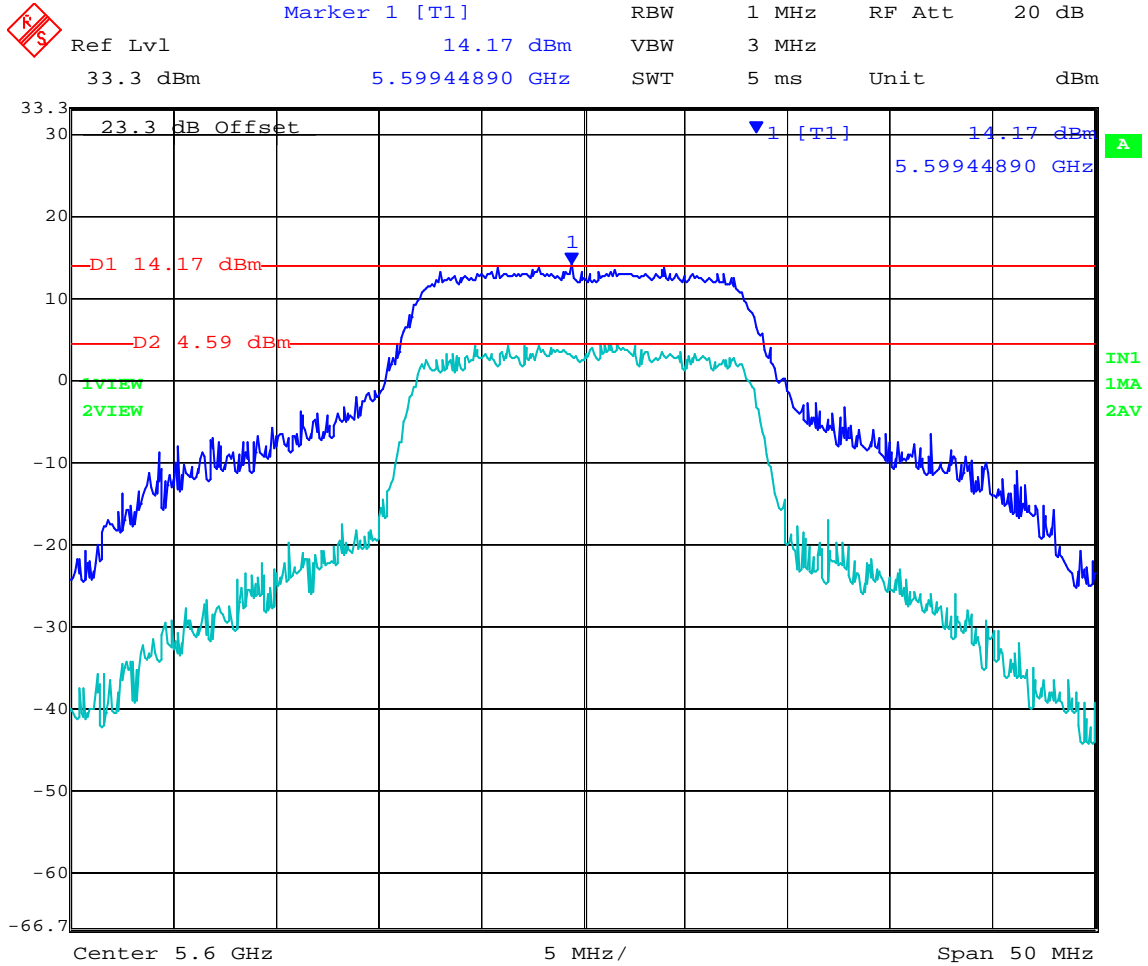


Date: 10.NOV.2007 16:04:42

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 100 of 293

5,700 MHz 802.11a Legacy - Peak Excursion Ratio

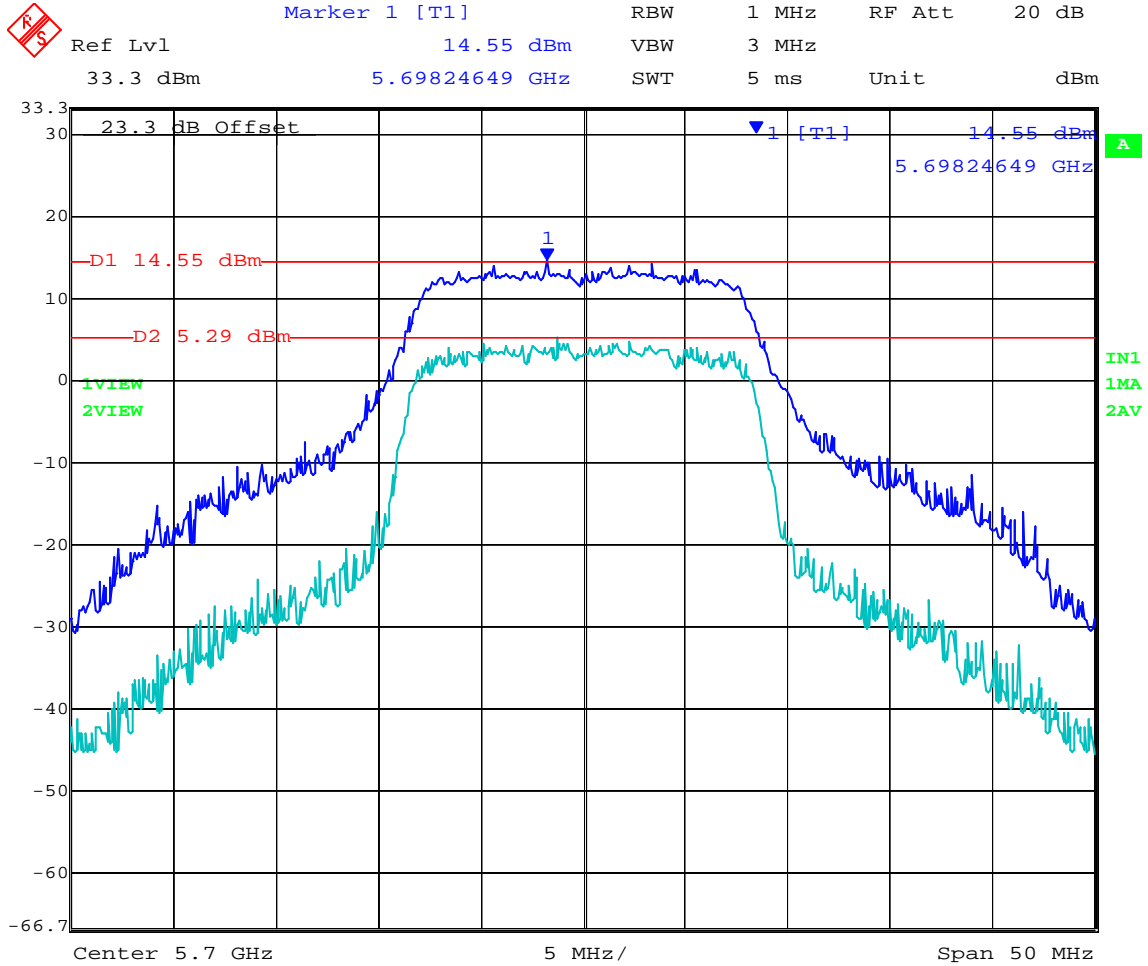

Date: 10.NOV.2007 16:05:49


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11n HT20

Centre Frequency (MHz)	Peak Excursion Ratio (dB)
5,180	9.60
5,200	9.36
5,240	8.29

5,180 MHz 802.11n HT20 - Peak Excursion Ratio

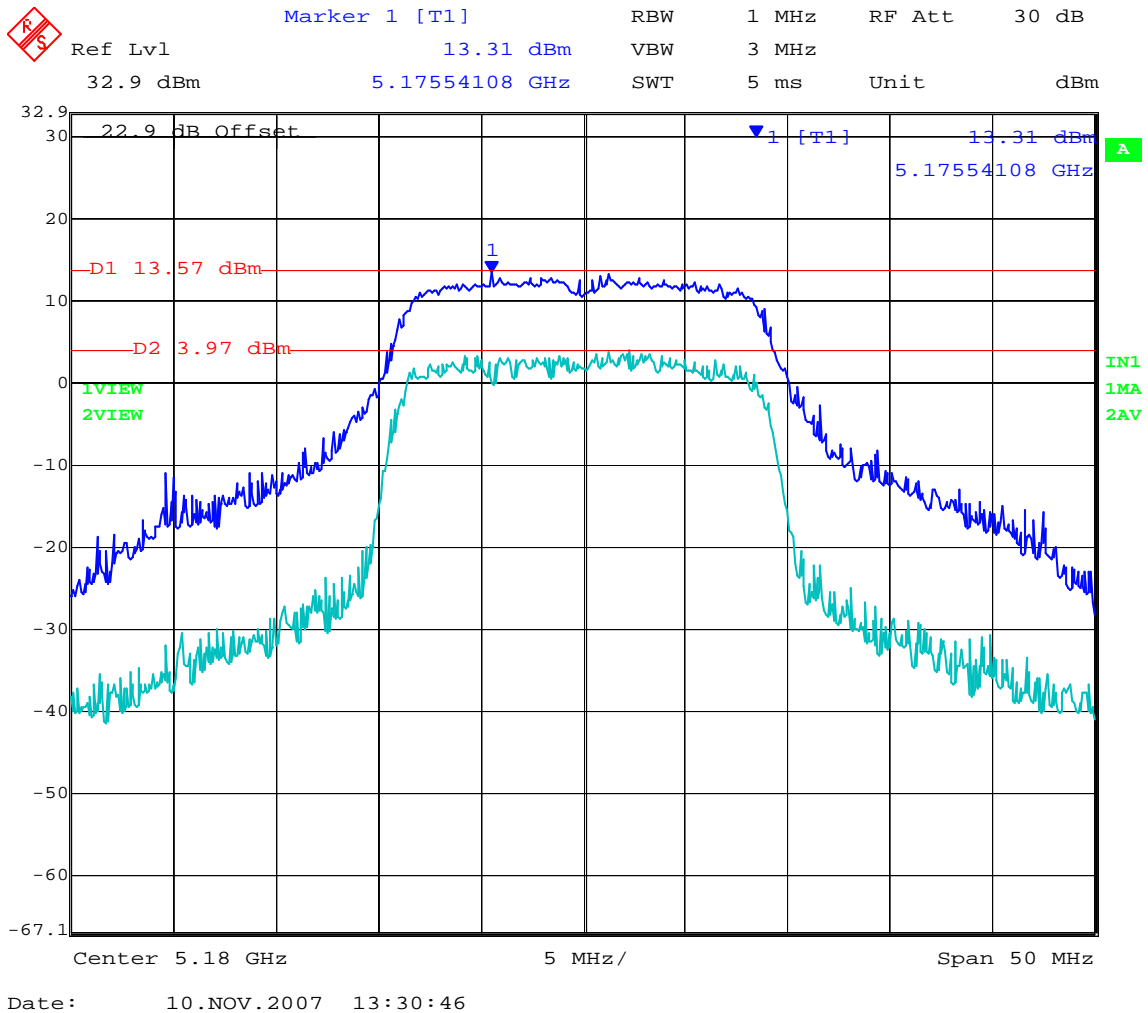


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 102 of 293

5,200 MHz 802.11n HT20 - Peak Excursion Ratio

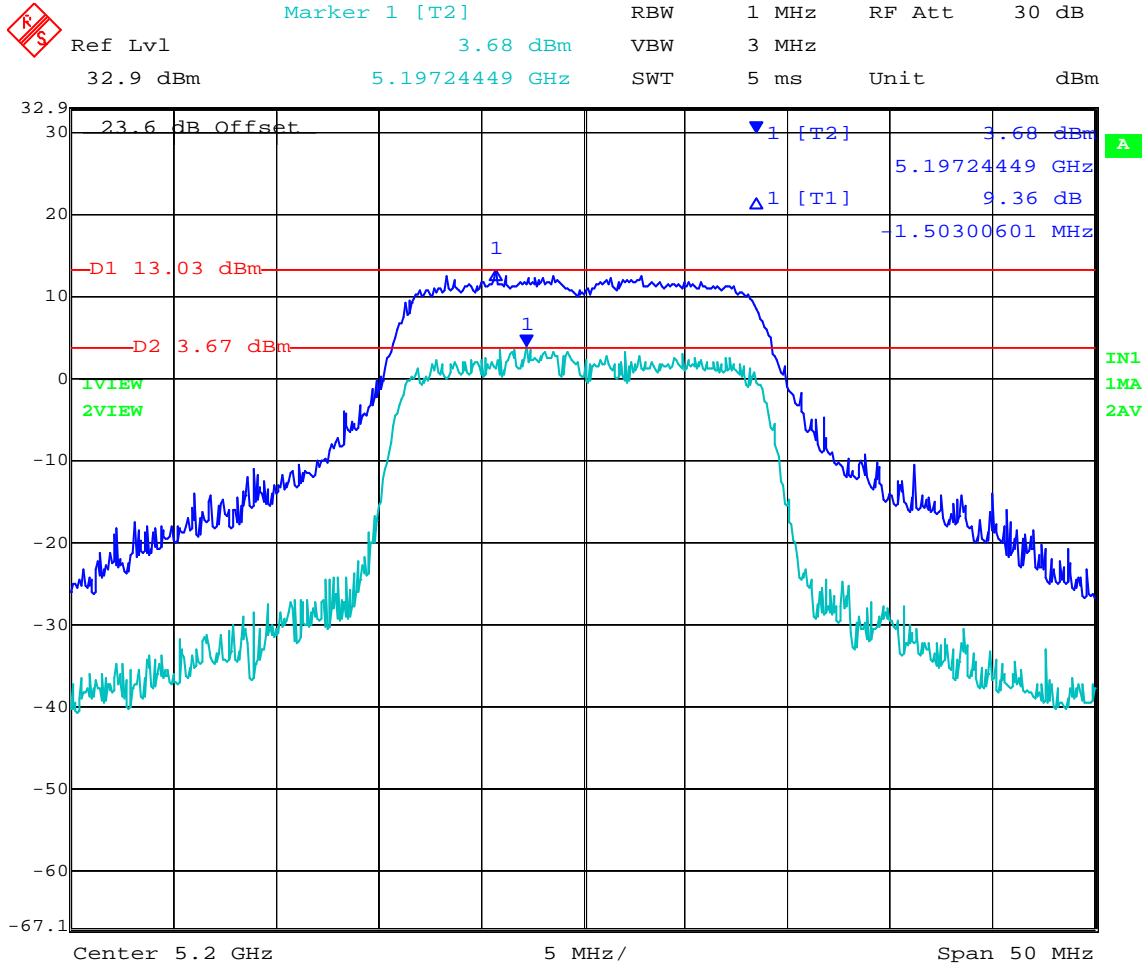


Date: 5.DEC.2007 19:43:40

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5,240 MHz 802.11n HT20 - Peak Excursion Ratio

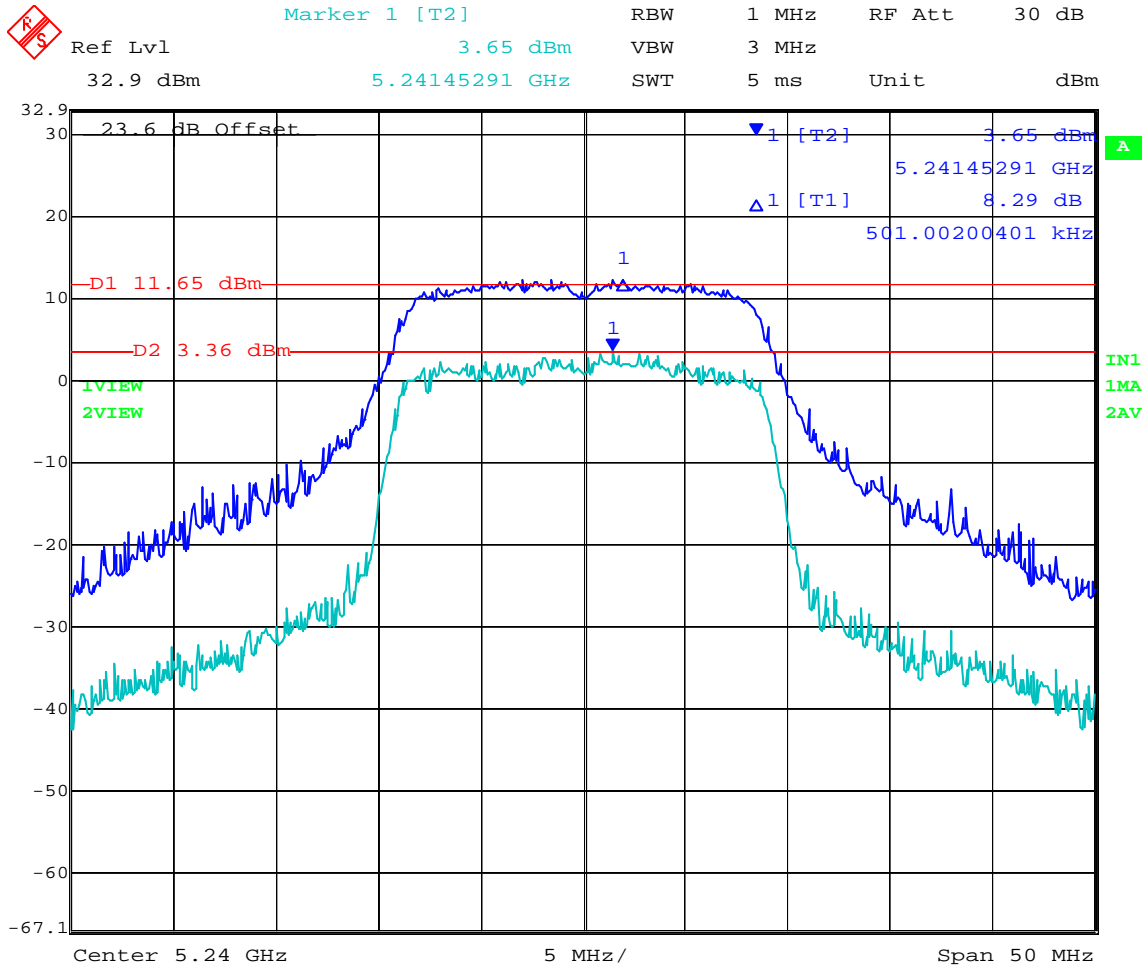


Date: 5.DEC.2007 19:51:38

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF RESULTS – 802.11n HT20

Centre Frequency (MHz)	Peak Excursion Ratio (dB)
5,260	10.47
5,300	10.03
5,320	8.73

5,260 MHz 802.11n HT20 - Peak Excursion Ratio

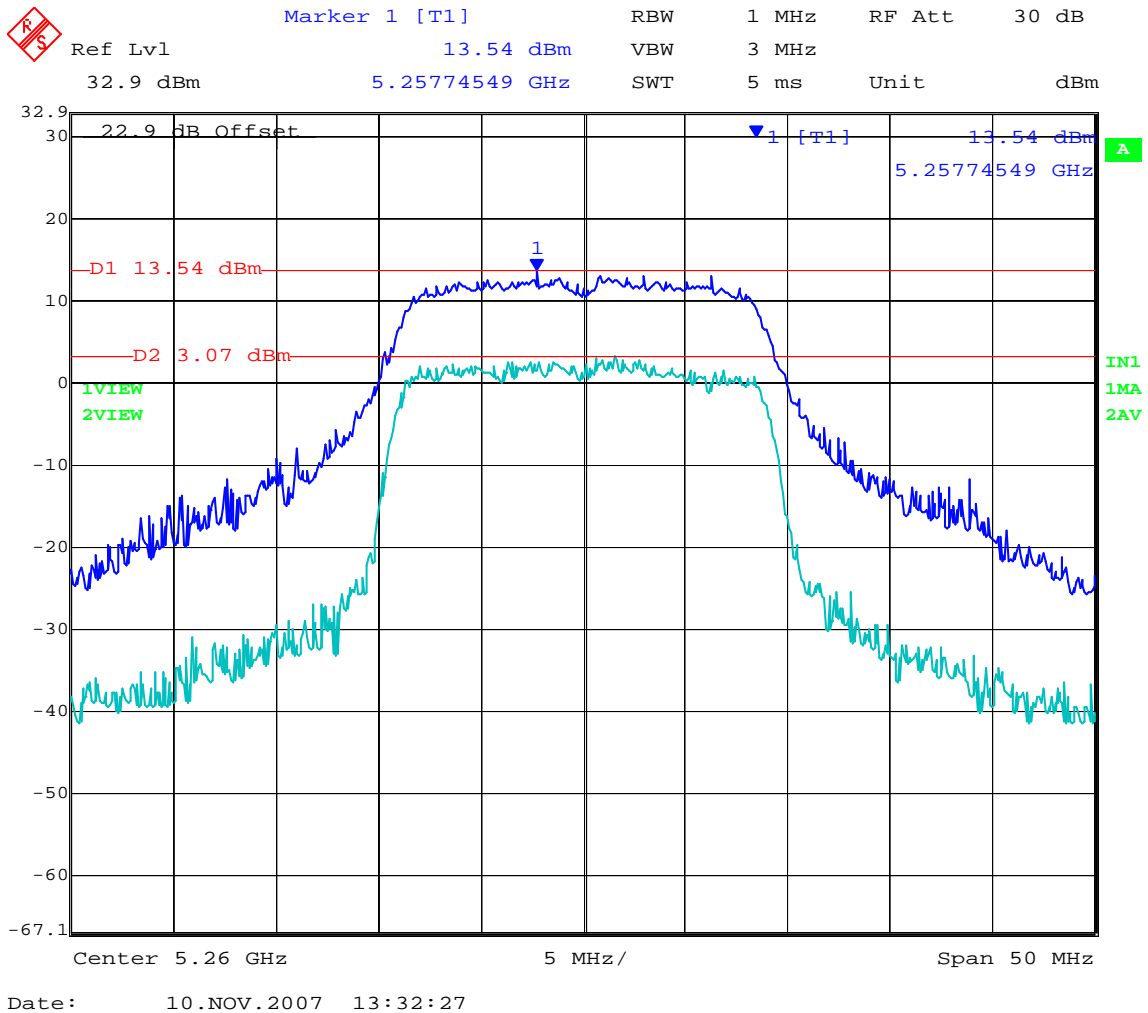


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 105 of 293


5,300 MHz 802.11n HT20 - Peak Excursion Ratio

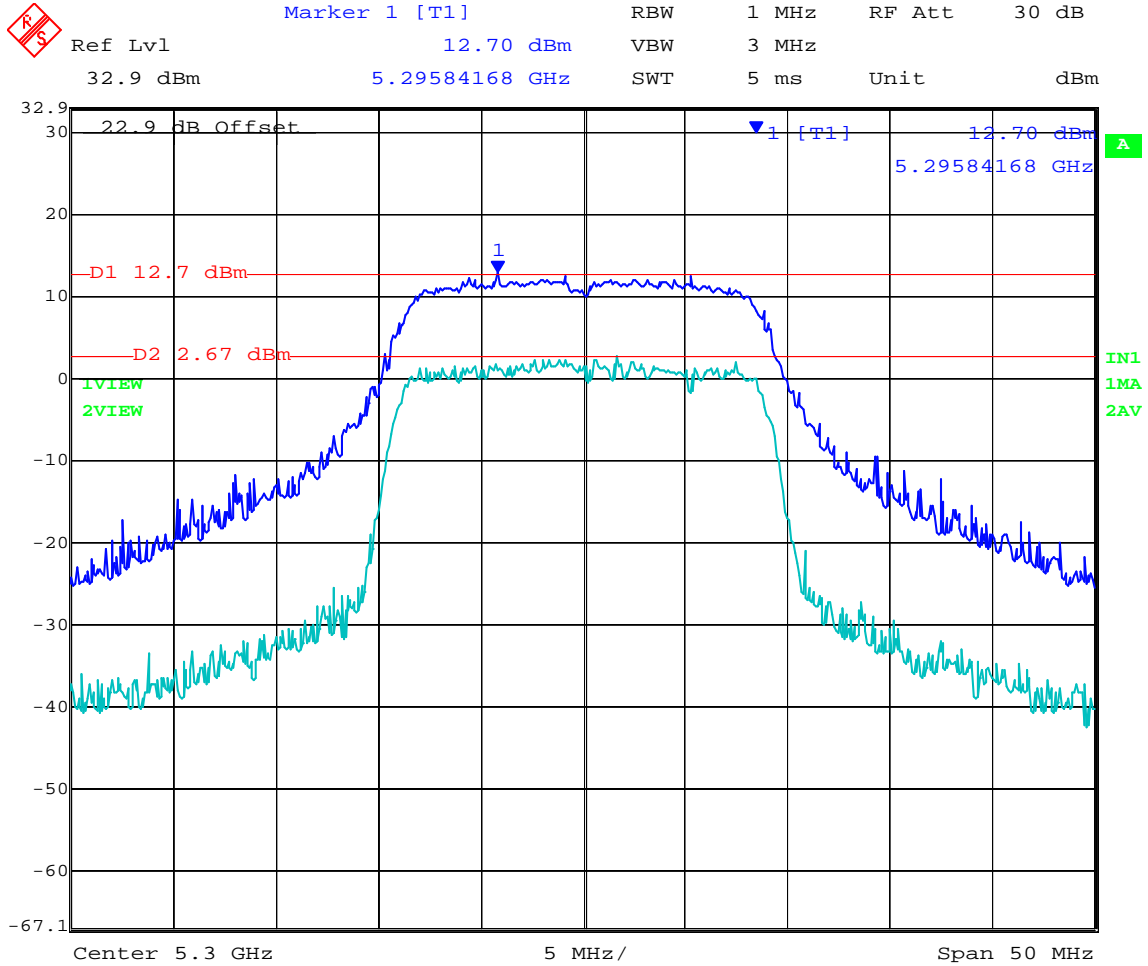

Date: 10.NOV.2007 13:35:00

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,320 MHz 802.11n HT20 - Peak Excursion Ratio

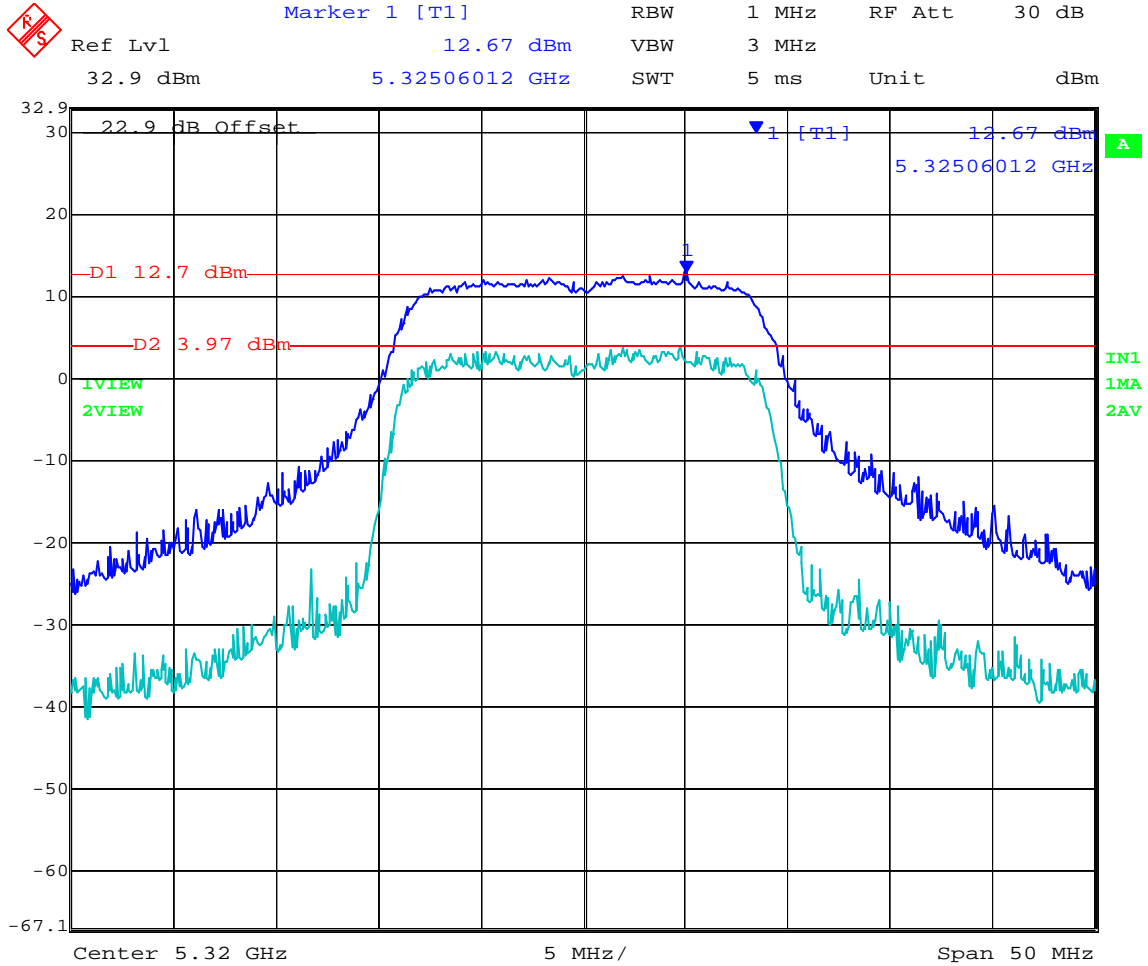


Date: 10.NOV.2007 13:36:22

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF RESULTS – 802.11n HT20

Centre Frequency (MHz)	Peak Excursion Ratio (dB)
5,500	8.27
5,600	9.37
5,700	9.19

5,500 MHz 802.11n HT20 - Peak Excursion Ratio

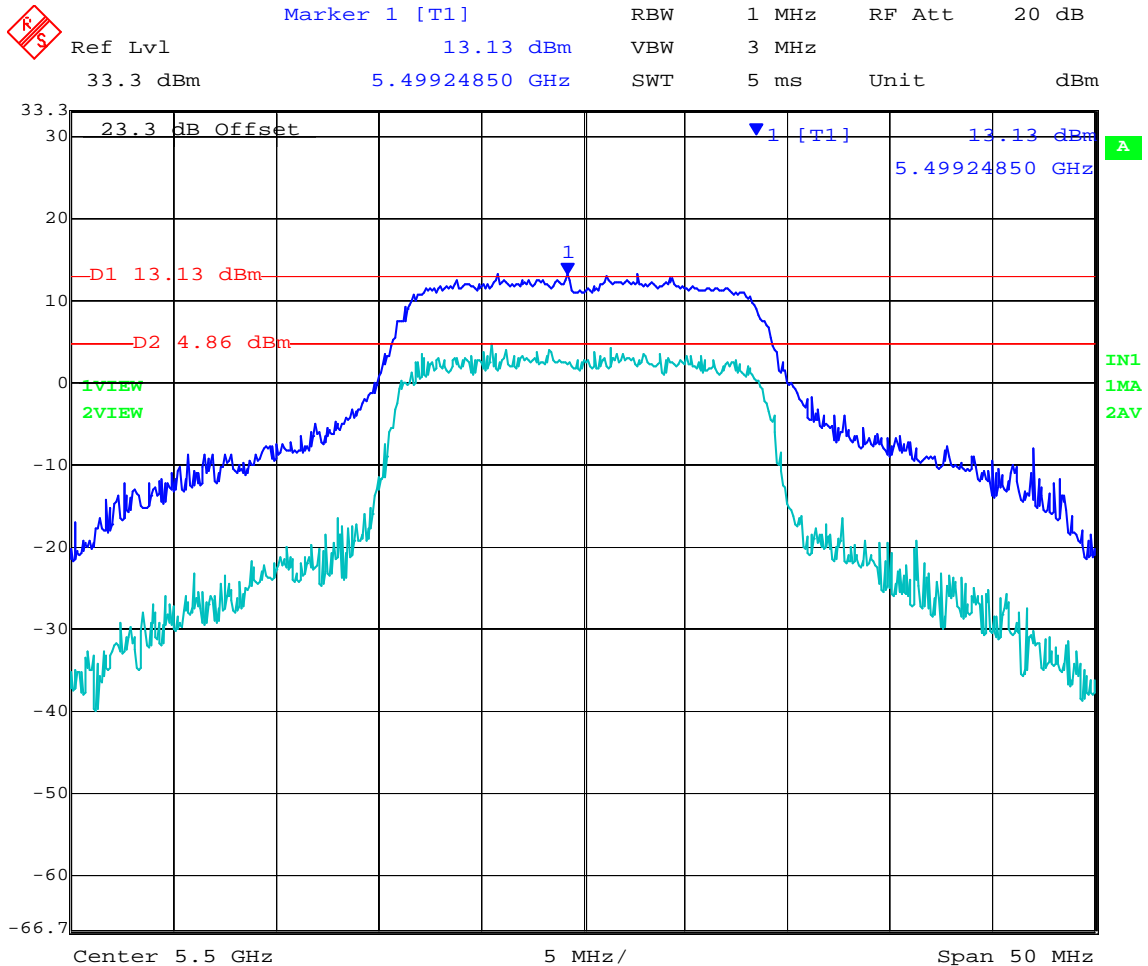


Date: 10.NOV.2007 15:30:01

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




5,600 MHz 802.11n HT20 - Peak Excursion Ratio

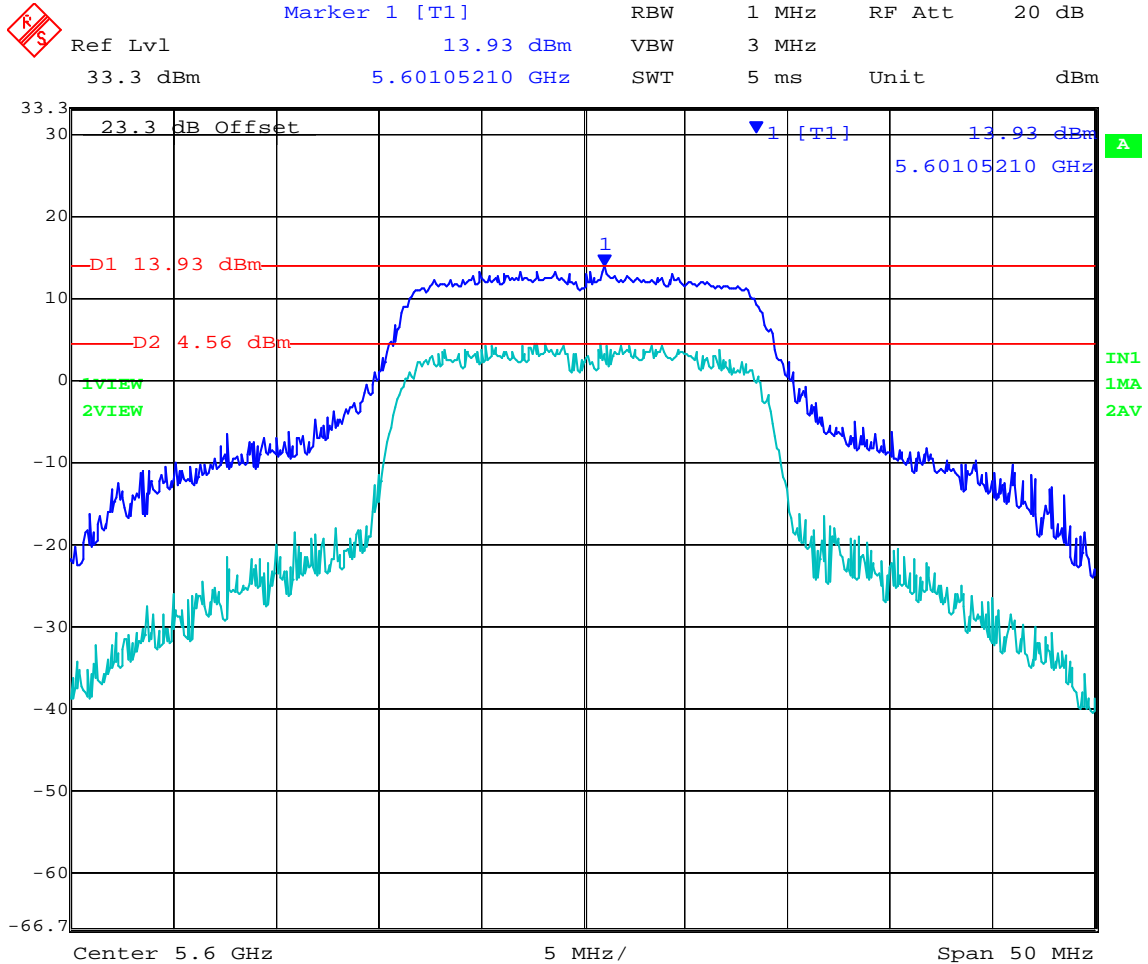

Date: 10.NOV.2007 15:28:56

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,700 MHz 802.11n HT20 - Peak Excursion Ratio

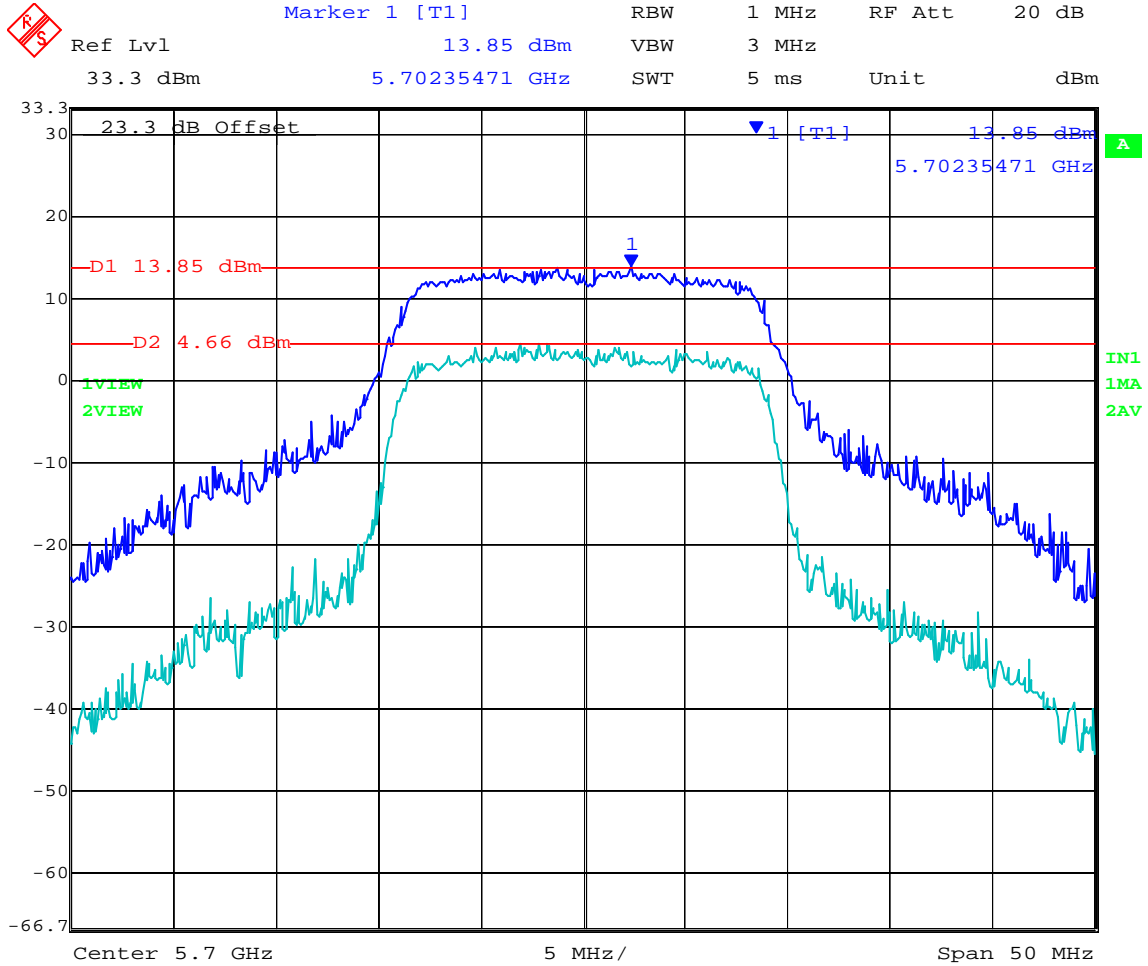

Date: 10.NOV.2007 15:27:29

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 110 of 293

TABLE OF RESULTS – 802.11n HT40

Centre Frequency (MHz)	Peak Excursion Ratio (dB)
5,190	10.59
5,230	9.28

5,190 MHz 802.11n HT40 - Peak Excursion Ratio

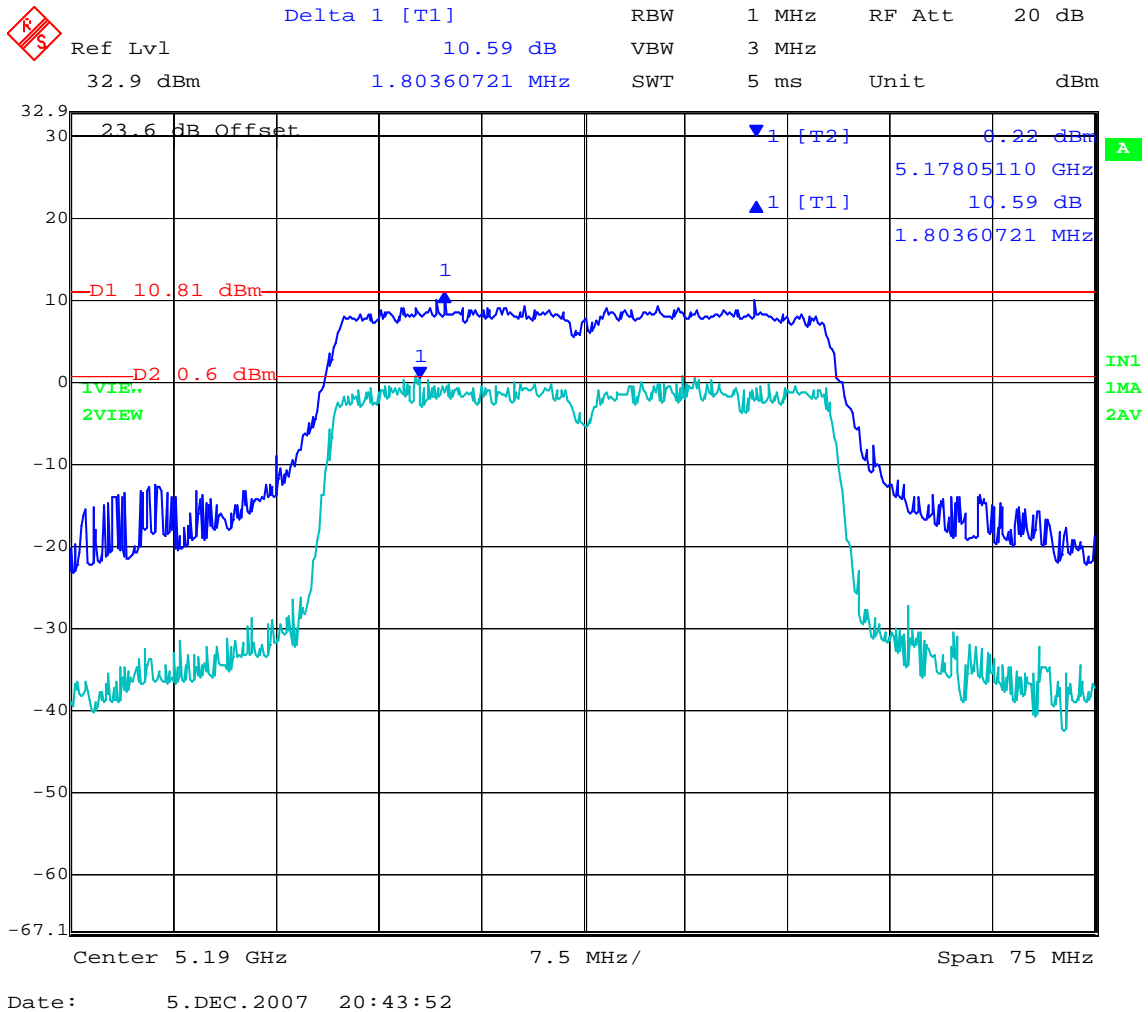


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 111 of 293

5,230 MHz 802.11n HT40 - Peak Excursion Ratio

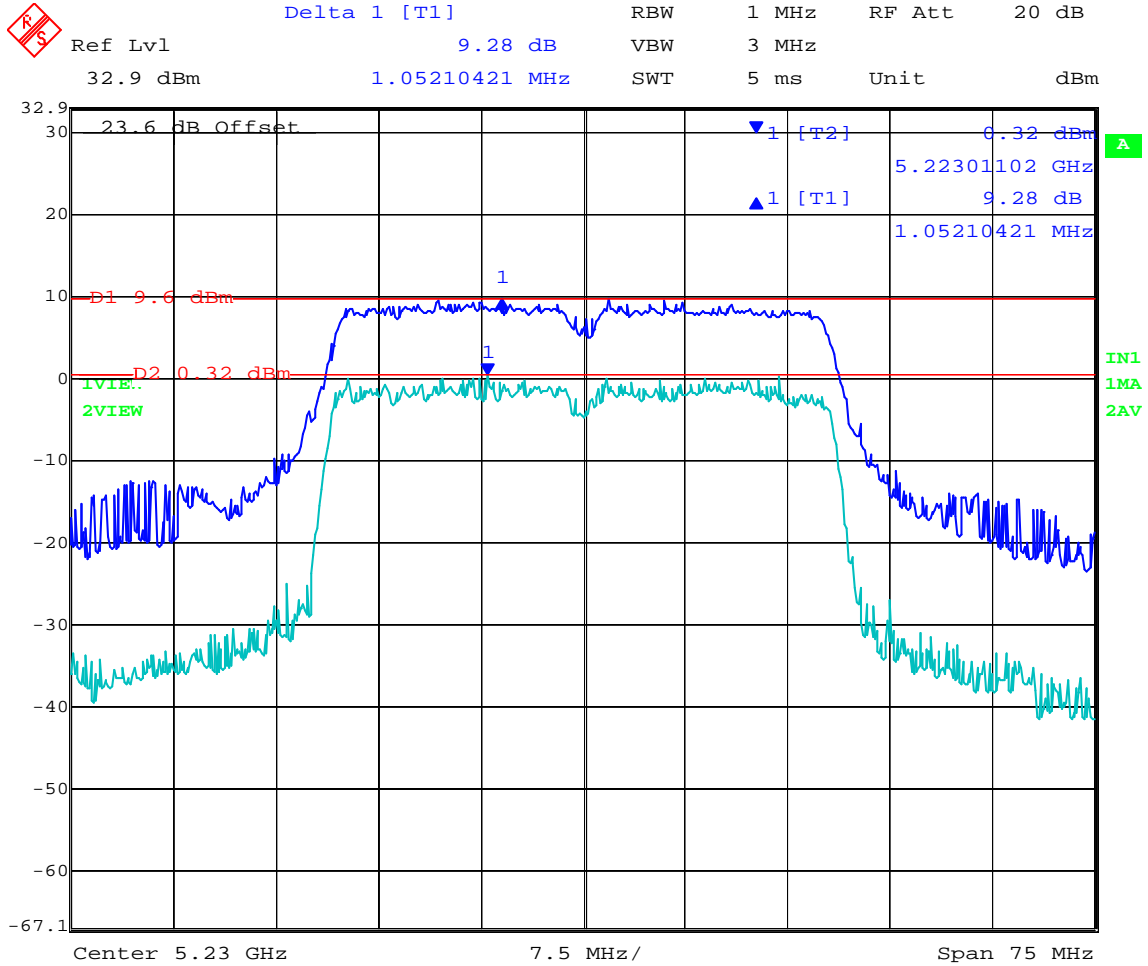

Date: 5.DEC.2007 20:45:43

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 112 of 293

TABLE OF RESULTS – 802.11n HT40

Centre Frequency (MHz)	Peak Excursion Ratio (dB)
5,270	10.10
5,310	10.16


5,270 MHz 802.11n HT40 - Peak Excursion Ratio

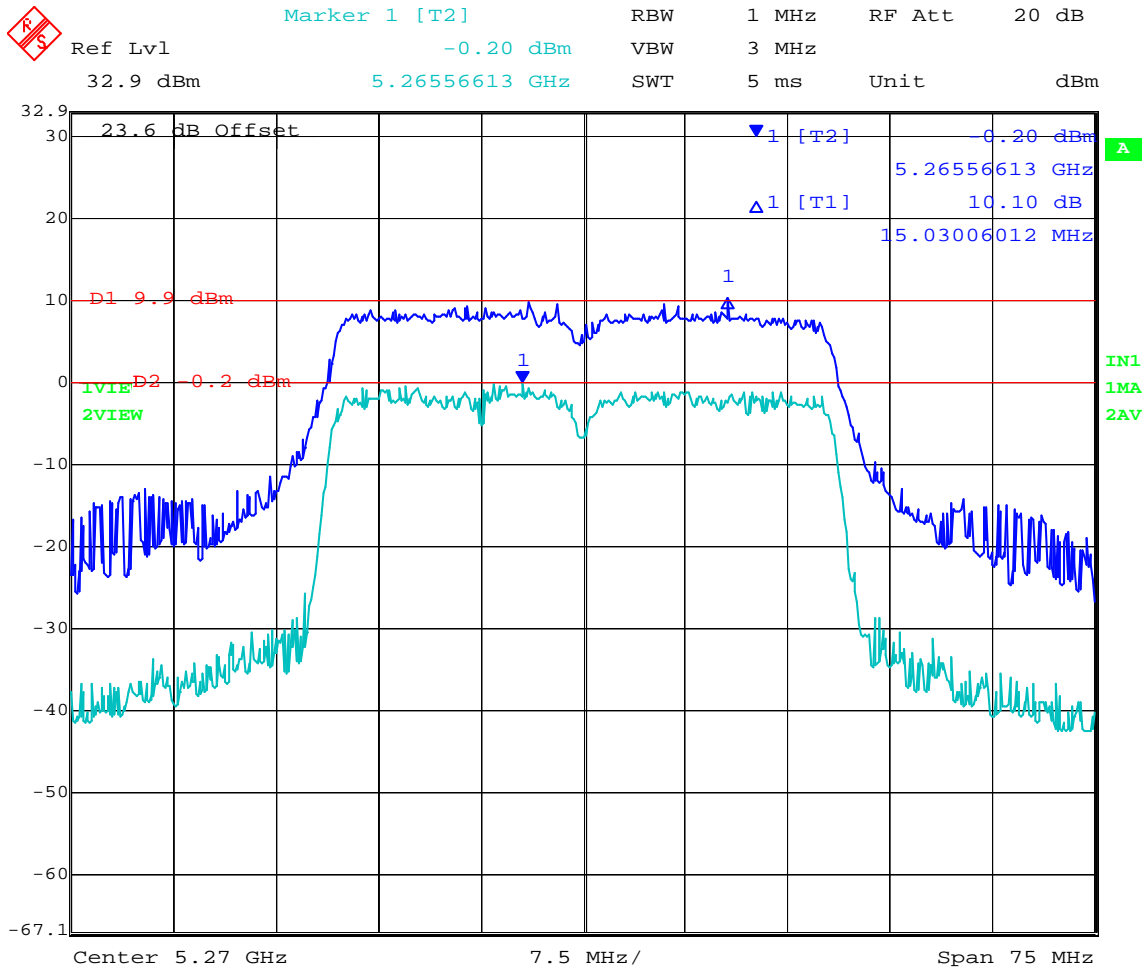

Date: 5.DEC.2007 20:47:31

5,310 MHz 802.11n HT40 - Peak Excursion Ratio

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

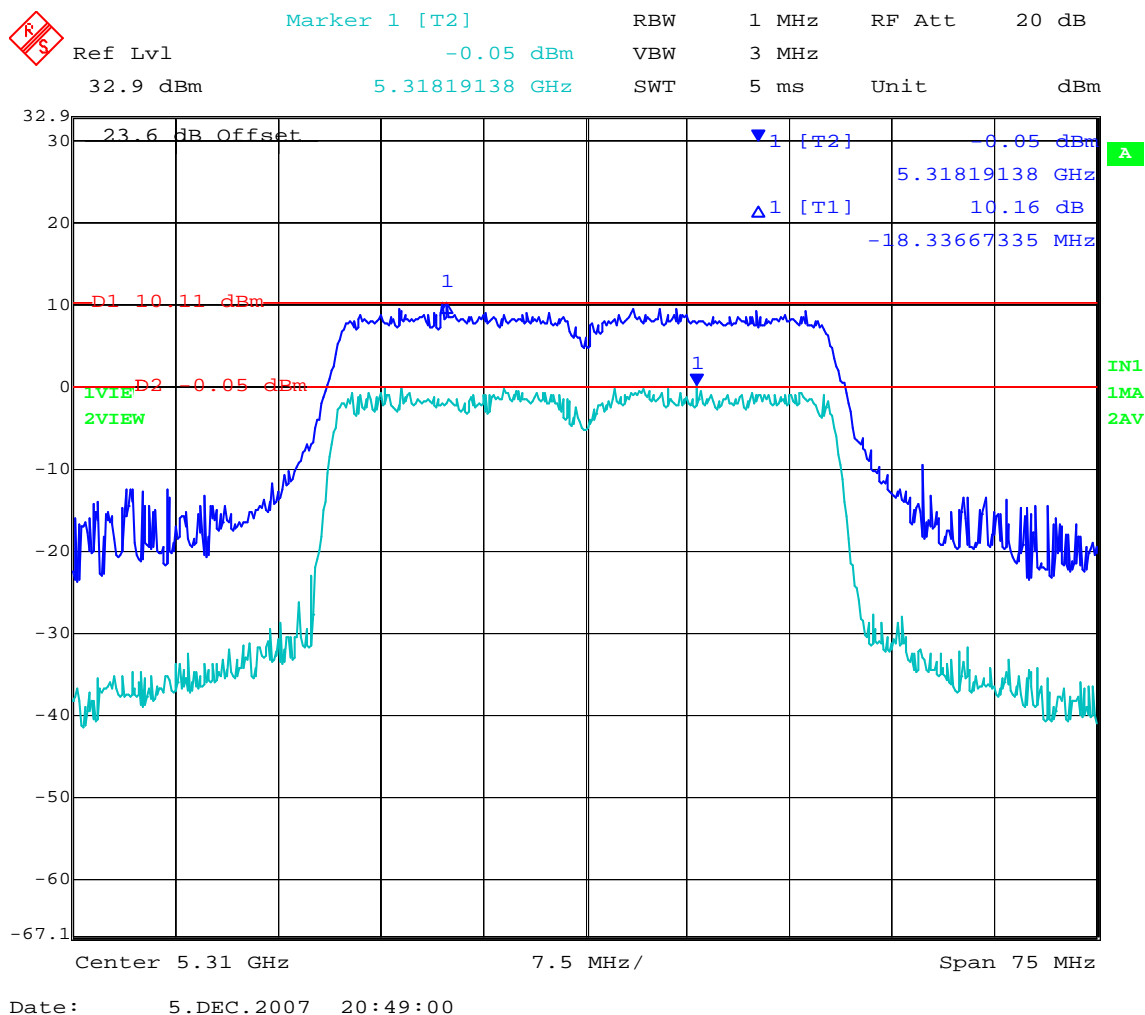

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 114 of 293

TABLE OF RESULTS – 802.11n HT40

Centre Frequency (MHz)	Peak Excursion Ratio (dB)
5,510	9.42
5,620	10.41
5,690	9.41

5,510 MHz 802.11n HT40 - Peak Excursion Ratio

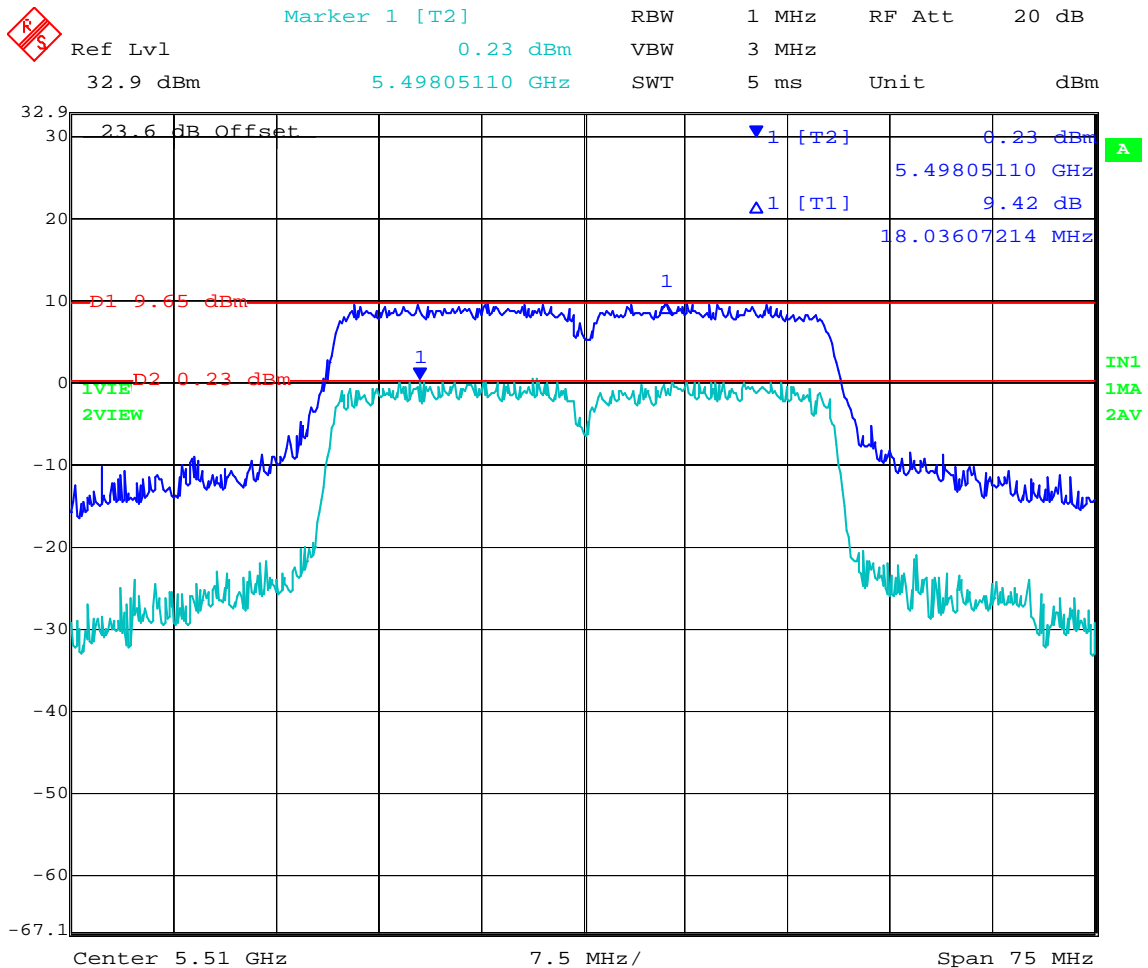


Date: 5.DEC.2007 20:51:44

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5,620 MHz 802.11n HT40 - Peak Excursion Ratio

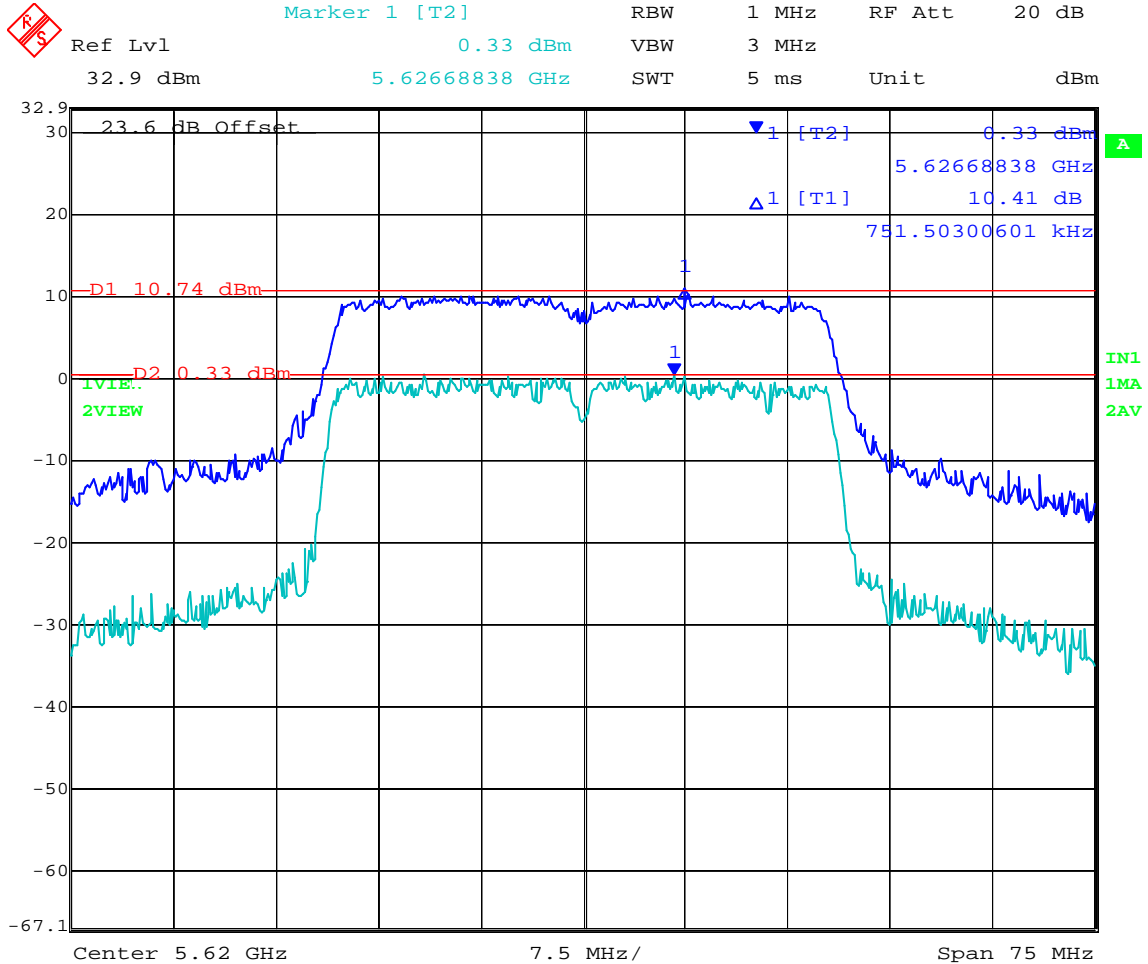


Date: 5.DEC.2007 20:53:05

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5,690 MHz 802.11n HT40 - Peak Excursion Ratio

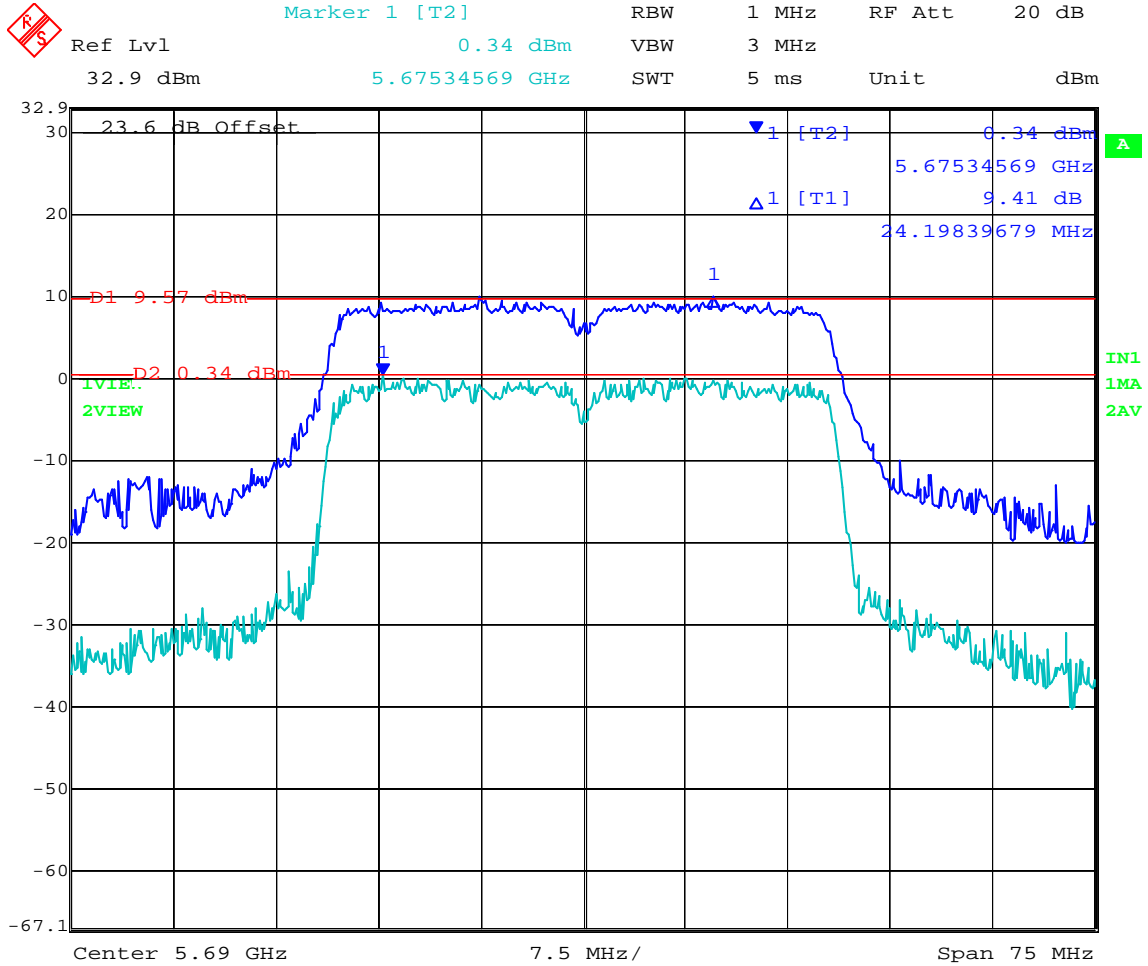

Date: 5.DEC.2007 20:54:54

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 117 of 293

Specification

Limits

§15.407 (a)(6) The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified in this paragraph) shall not exceed 13dB across any 1MHz bandwidth or the emission bandwidth whichever is less

Laboratory Measurement Uncertainty for Spectrum Measurement

Measurement uncertainty	± 2.81dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of RF Spectrum Mask'	0158, 0193, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 118 of 293

5.1.5. Frequency Stability

FCC, Part 15 Subpart C §15.407(g)
Industry Canada RSS-210 §2.1

Test Procedure

The manufacturer of the equipment is responsible for ensuring that the frequency stability is such that emissions are always maintained within the band of operation under all conditions.

Manufacturer Declaration

The frequency stability of the reference oscillator sets the frequency stability of the RF transceiver signals. Therefore all of the RF signals should have ± 20 ppm stability.

This stability accounts for room temp tolerance of the crystal oscillator circuit, frequency variation across temperature, and crystal ageing.

± 20 ppm at 5.250 GHz translates to a maximum frequency shift of ± 105 KHz. As the edge of the channels is at least one MHz from either of the band edges, ± 105 KHz is more than sufficient to guarantee that the intentional emission will remain in the band over the entire operating range of the EUT.

Specification

Limits

§15.407 (g) Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5.1.6. Maximum Permissible Exposure

FCC, Part 15 Subpart C §15.407(f)
Industry Canada RSS-Gen §5.5

Calculations for Maximum Permissible Exposure Levels

Power Density = Pd (mW/cm²) = EIRP/(4πd²)

EIRP = P * G * 3

P = Peak output power (mW)

G = Antenna numeric gain (numeric)

d = Separation distance (cm)

Numeric Gain = 10 ^ (G (dBi)/10)

The Aruba AP-120/121 has three transmitters. The peak power in the table below is calculated by assuming a worst case scenario where the three transmitters are operating simultaneously in the same band. The Peak Power in mW is calculated by taking the maximum conducted power measured in each band and multiplying by 3.

Because the EUT belongs to the General Population/Uncontrolled Exposure the limit of power density is 1.0 mW/cm²

Freq. Band (MHz)	Antenna Gain (dBi)	Numeric Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Calculated Safe Distance @ 1mW/cm ² Limit(cm)	Minimum Separation Distance (cm)
5150 - 5250	14.0	25.12	+14.93	93.35	13.66	20
5250 - 5350	14.0	25.12	+14.52	84.95	13.03	20
5470 - 5725	14.0	25.12	+15.95	118.07	15.37	20

Note: for mobile or fixed location transmitters the minimum separation distance is 20cm, even if calculations indicate the MPE distance to be less.

Specification

Maximum Permissible Exposure Limits

FCC §1.1310 Limit = 1mW / cm² from 1.310 Table 1

RSS-Gen §5.5 Before equipment certification is granted, the application requirements of RSS-102 shall be met.

Laboratory Measurement Uncertainty for Power Measurements

Measurement uncertainty	±1.33 dB
-------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.7. Radiated Emissions

5.1.7.1. Transmitter Radiated Spurious Emissions (above 1 GHz); Peak Field Strength Measurements; and Radiated Band Edge Measurements – Restricted Bands


FCC, Part 15 Subpart C §15.407(b)(2), §15.205(a)/15.209(a)
Industry Canada RSS-210 §A9.3(2); §2.2; §2.6; RSS-Gen §4.7

Test Procedure

Radiated emissions above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

All measurements on any frequency or frequencies over 1 MHz are based on the use of measurement instrumentation employing an average detector function. All measurements above 1 GHz were performed using a minimum resolution bandwidth of 1 MHz.

Test Measurement Set up

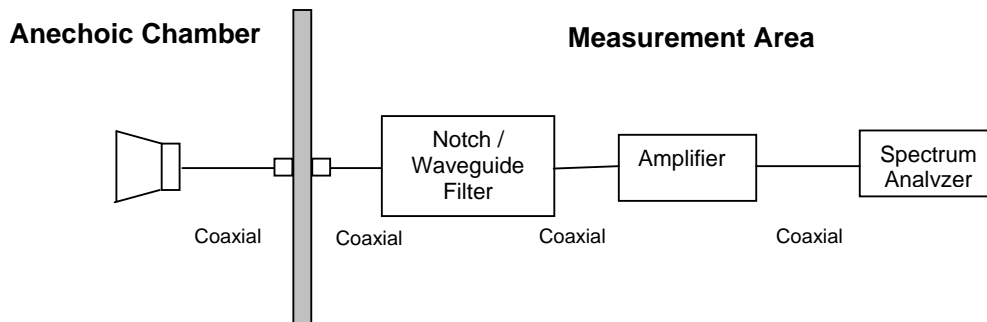

Measurement set up for Radiated Emission Test

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where: FS = Field Strength
R = Measured Spectrum analyzer Input Amplitude
AF = Antenna Factor
CORR = Correction Factor = CL – AG + NFL
CL = Cable Loss
AG = Amplifier Gain
FO = Distance Falloff Factor
NFL = Notch Filter Loss or Waveguide Loss



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 121 of 293

For example:

Given receiver input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu V/m))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength (dB μ V/m);

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

$$\text{Therefore: } -27 \text{ dBm/MHz} = 68.23 \text{ dB}\mu\text{V/m}$$

Note: The data in this Section identifies that the EUT is in compliance with the -27dBm/MHz EIRP limit (68.23 dB μ V/m) for out of band emissions. All peak emissions are less than 68.23 dB μ V/m.

Measurement Results Transmitter Radiated Spurious Emissions above 1 GHz

Ambient conditions.

Temperature: 17 to 23°C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

Emission Characterization

During testing it was verified that there were several emissions emanating from the body of the EUT which was unrelated to antenna type and gain. The emissions which were observed over the range 1 - 3.5 GHz were individually characterized. The peak amplitude of emissions were found to be above 54dB μ V/m however they averaged down below the average limit in all cases.

Emissions 1-3.5 GHz and corresponding measurement values are identified on the following page.


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Emission Characterization

Emissions emanating from body of EUT, 50 Ohm termination on all antenna ports
 NRB = None Restrictive Band

Spurious Emission Scan

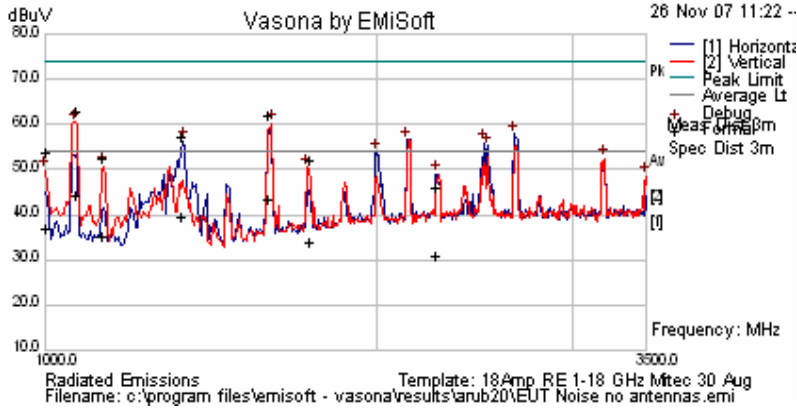

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	PoI	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
1070.391	74.79	2.02	-16.09	60.72	Peak Max	V	98	45	74	-13.28	Pass	
1594.398	71.79	2.45	-14.37	59.88	Peak Max	V	104	187	74	-14.12	Pass	
2490.768	65.69	3	-11.24	57.45	Peak Max	V	128	30	74	-16.55	Pass	
1331.012	68.73	2.25	-15.58	55.4	Peak Max	V	119	66	74	-18.60	Pass	
1129.389	64.41	2.08	-15.96	50.52	Peak Max	V	98	27	74	-23.48	Pass	
1739.83	60.74	2.57	-13.26	50.04	Peak Max	V	98	218	74	-23.96	Pass	
1002.856	66.21	1.95	-16.15	52.01	Peak Max	V	99	12	74	-21.99	Pass	
2257.515	52.19	2.89	-11.02	44.05	Peak Max	V	142	185	74	-29.95	Pass	
1070.391	56.14	2.02	-16.09	42.07	Average Max	V	98	45	54	-11.93	Pass	
1594.398	53.15	2.45	-14.37	41.24	Average Max	V	104	187	54	-12.76	Pass	
2490.768	52.71	3	-11.24	44.47	Average Max	V	128	30	54	-9.53	Pass	
1331.012	51.05	2.25	-15.58	37.72	Average Max	H	106	18	54	-16.28	Pass	
1129.389	47.2	2.08	-15.96	33.31	Average Max	V	98	27	54	-20.69	Pass	
1739.83	42.47	2.57	-13.26	31.78	Average Max	V	98	218	54	-22.22	Pass	
1002.856	49.16	1.95	-16.15	34.96	Average Max	V	99	12	54	-19.04	Pass	
2257.515	37.03	2.89	-11.02	28.89	Average Max	H	125	134	54	-25.11	Pass	
2658.317	66.27	3.13	-11.37	58.02	Peak [Scan]	H	100	0				NRB
2127.255	64.97	2.82	-11.04	56.75	Peak [Scan]	H	100	0				NRB
2513.026	63.53	3.01	-11.31	55.23	Peak [Scan]	H	100	0				NRB
1996.994	62.23	2.75	-11.18	53.79	Peak [Scan]	H	100	0				NRB
3209.419	60.7	3.48	-11.65	52.53	Peak [Scan]	V	100	0				NRB
3494.99	56.73	3.6	-11.68	48.65	Peak [Scan]	V	100	0				NRB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 123 of 293

ARUB20 AP-125 (ANT-INTEGRAL)
ART Settings V Aggregate Measured Power

The following matrix identifies the ART power setting V's each output chain. The aggregate power was also measured for all three chains.

As a result of either spurious emissions (harmonic) or band-edge issues the power was reduced to bring the unit into compliance.

Configuration	ART Power Setting	Tx 1 Measured Pwr (dBm)	Tx 2 Measured Pwr (dBm)	Tx 3 Measured Pwr (dBm)	Aggregate Measured Pwr (dBm)
Legacy a (5150 5180 MHz)BE	16	13.70	13.65	14.56	19.27
Legacy a (5350 5320 MHz)BE	16.5	13.81	14.89	13.96	19.86
Legacy a (5460 5150 5745 MHz)BE	17	14.05	13.91	15.12	19.97
Legacy a (5460 5500 MHz)BE	17	15.02	14.99	15.09	20.78
HT-20					
HT-20 (5150 5180 MHz)BE	16.5	14.02	13.82	14.80	18.75
HT-20 (5350 5320 MHz)BE	11.5	9.19	9.69	9.20	14.76
HT-20 (5460 5150 5745 MHz)BE	17	13.95	13.75	15.00	19.98
HT-20 (5460 5500 MHz)BE	16.5	14.45	14.35	14.38	20.10
HT-40					
HT-40 (5150 5190 MHz)BE	13	10.27	10.53	10.90	16.04
HT-40 (5350 5310 MHz)BE	13.5	10.54	11.05	10.53	16.00
HT-40 (5150 5190 5755 MHz)BE	17	13.94	13.67	14.82	19.84
HT-40 (5460 5510 MHz)BE	14.5	12.48	12.26	12.21	17.83

Note BE = Band-edge, SE – Spurious emissions

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




AP125: 5150-5250GHz INTEGRAL Legacy Data Rates


ARUB20 AP125 - INTEGRAL Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MBit/s)	Compliant
36	5180	ART 17	99%	a 6 Legacy	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

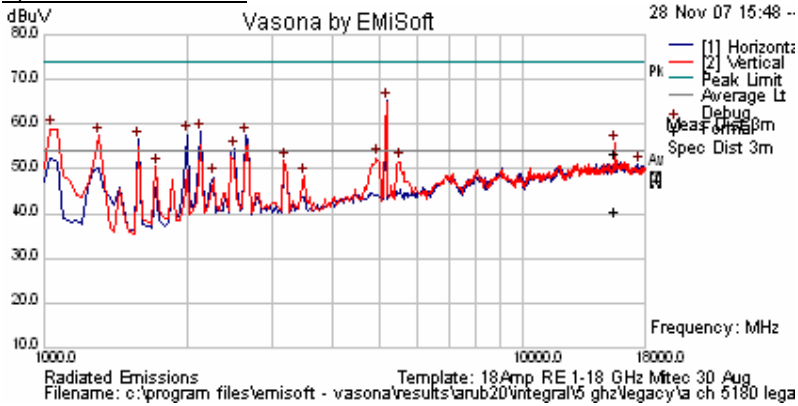

Peak Emission Scan

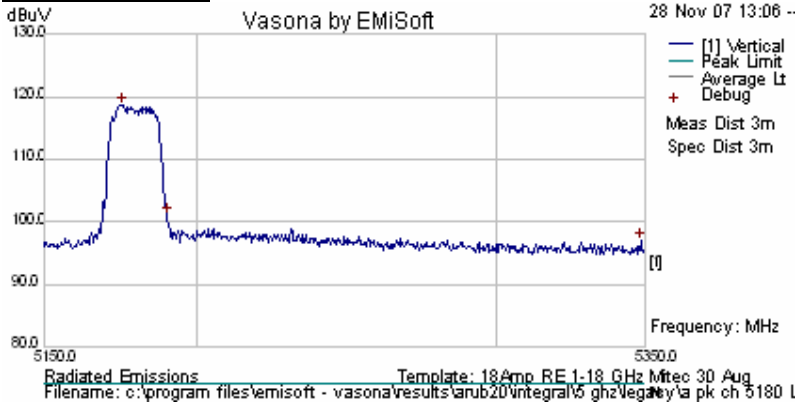


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5176.052	73.39	10.62	34.65	118.66	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
5150.000	ART Power Setting = 16.0				Peak Max	V			74	-1.21	Pass	Band-edge
5150.000	ART Power Setting = 16.0				Average Max	V			54	-0.45	Pass	Band-edge
15541.16	44.18	8.28	-1.03	51.42	Peak Max	V	111	344	74	-22.58	Pass	
15541.16	31.06	8.28	-1.03	38.3	Average Max	H	112	154	54	-15.7	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 125 of 293

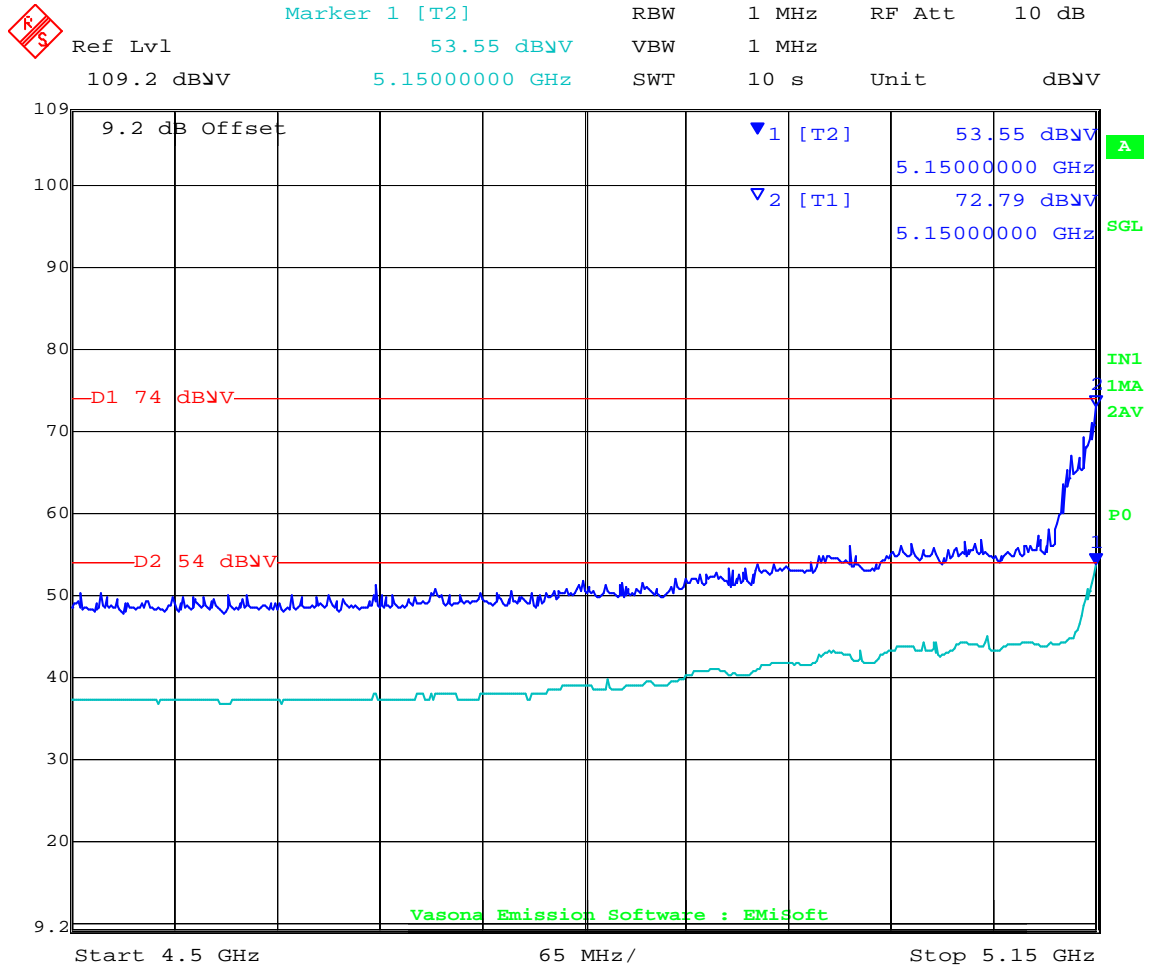

Date: 1.DEC.2007 16:27:26

802.11a Legacy Band-edge @ 5150 MHz with Integral antenna

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 126 of 293

ARUB20 AP125 - INTEGRAL Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MBit/s)	Compliant
40	5200	ART 17	99%	a 6 Legacy	Yes


Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

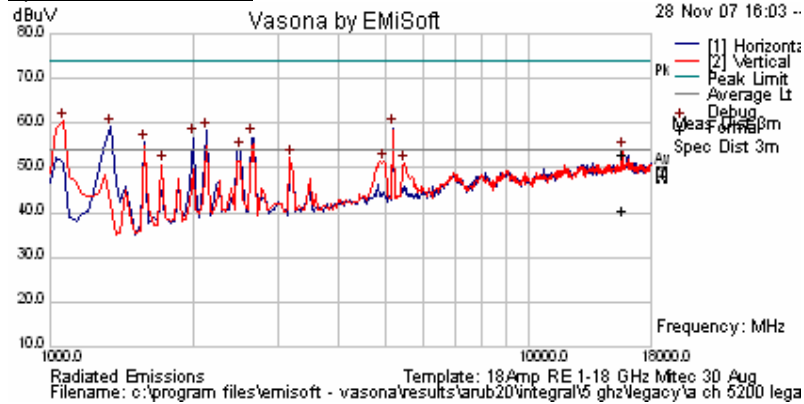

Spurious Emission Scan

Peak Emission Scan

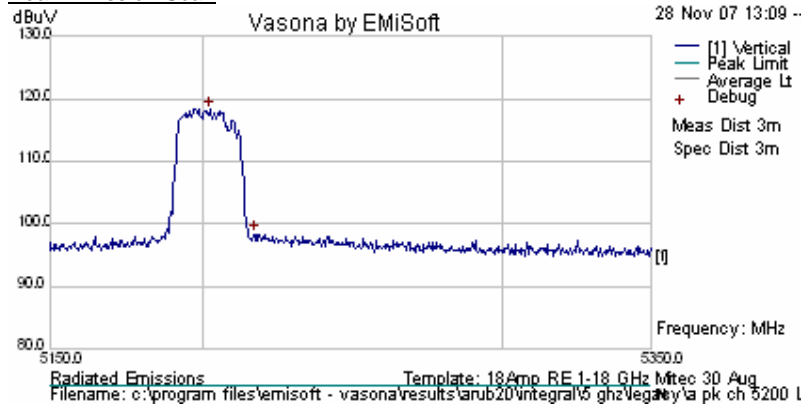

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5202.505	73.03	10.62	34.67	118.32	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
15602.3	43.62	8.38	-1.16	50.84	Peak Max	V	127	316	74	-23.16	15602.3	
15602.3	30.96	8.38	-1.16	38.18	Average Max	V	127	316	54	-15.82	15602.3	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 127 of 293


ARUB20 AP125 - INTEGRAL Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MBit/s)	Compliant
48	5240	ART 17	99%	a 6 Legacy	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

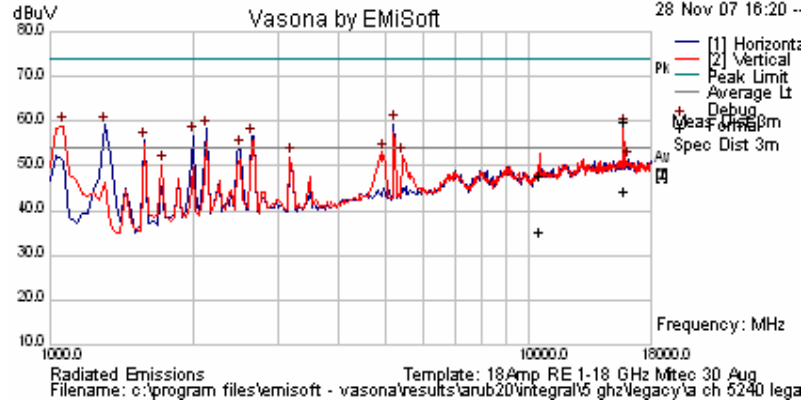

Peak Emission Scan

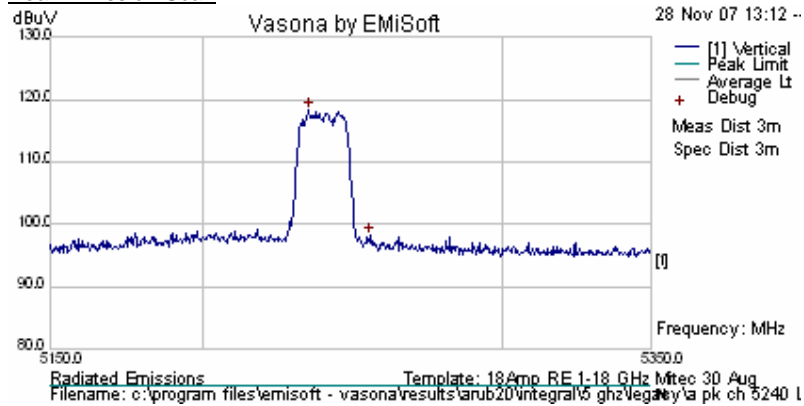

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5235.371	72.9	10.62	34.69	118.21	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
15751.5	50.36	8.62	-1.16	57.82	Peak Max	V	98	283	74	-16.18	Pass	
10481.65	39.9	6.77	-1.04	45.63	Peak Max	V	151	47	74	-28.37	Pass	
15751.5	34.65	8.62	-1.16	42.11	Average Max	V	98	283	54	-11.89	Pass	
10481.65	27.25	6.77	-1.04	32.98	Average Max	V	151	47	54	-21.02	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 128 of 293

AP125: 5250-5350GHz INTEGRAL Legacy Data Rates


ARUB20 AP125 - INTEGRAL Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MBit/s)	Compliant
52	5260	ART 17	99%	a 6 Legacy	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

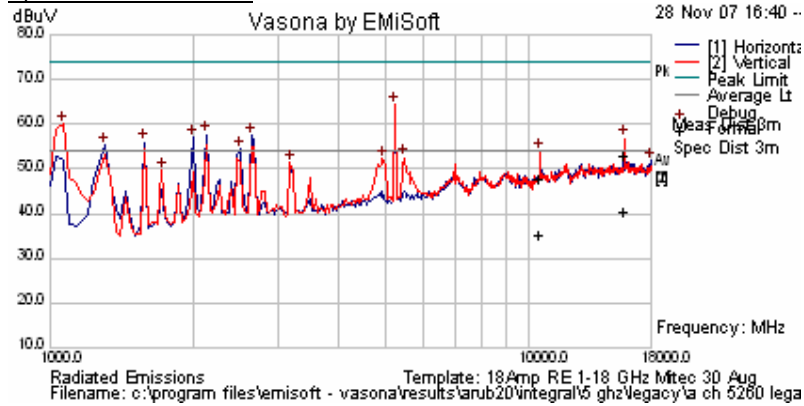

Peak Emission Scan

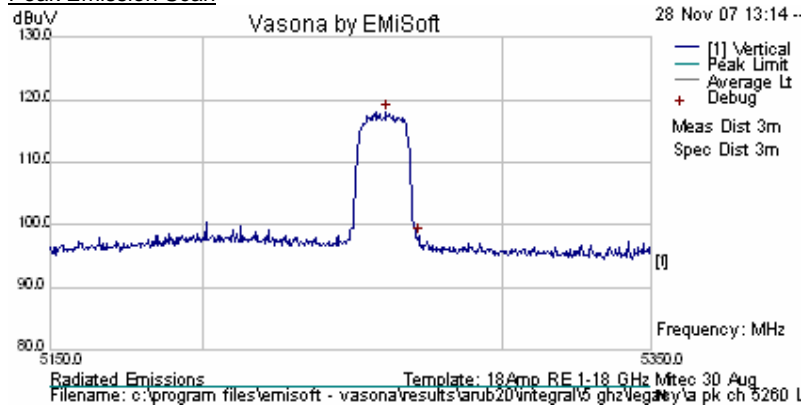

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5261.022	72.71	10.62	34.71	118.05	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
15782.64	43.2	8.67	-1.12	50.75	Peak Max	V	103	26	74	-23.25	Pass	
10523.08	40.02	6.79	-1.01	45.8	Peak Max	V	98	32	74	-28.2	Pass	
15782.64	30.69	8.67	-1.12	38.25	Average Max	V	103	26	54	-15.75	Pass	
10523.08	27.45	6.79	-1.01	33.23	Average Max	H	112	238	54	-20.77	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 129 of 293


ARUB20 AP125 - INTEGRAL Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MBit/s)	Compliant
60	5300	ART 17	99%	a 6 Legacy	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

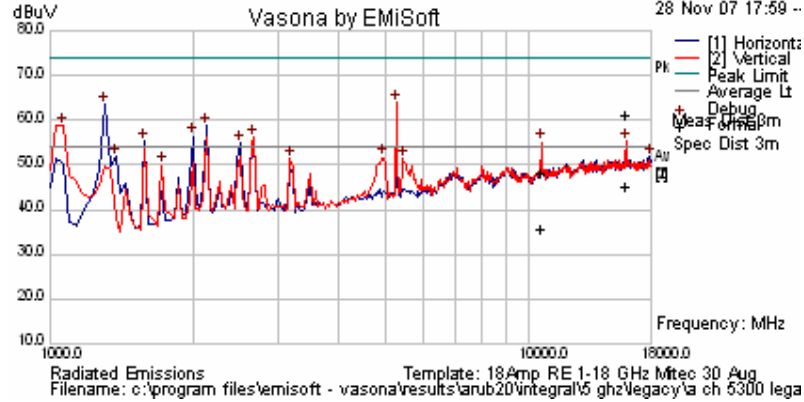

Peak Emission Scan

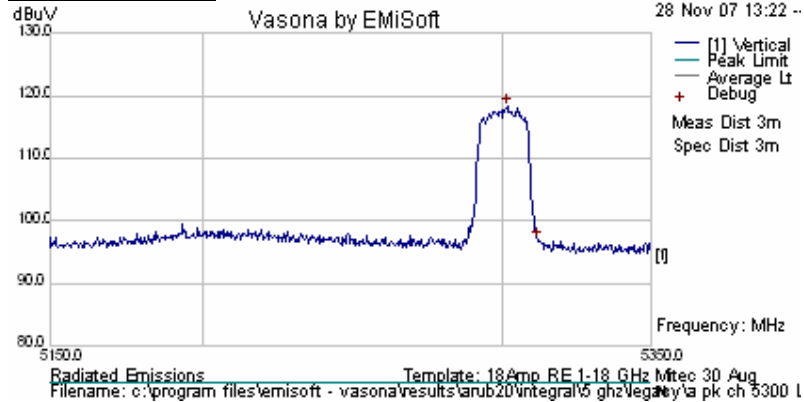

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5301.503	72.78	10.62	34.75	118.15	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
15901.82	51.12	8.86	-1.02	58.97	Peak Max	V	99	286	74	-15.03	Pass	
10602.59	40.55	6.82	-1.08	46.28	Peak Max	V	98	81	74	-27.72	Pass	
15901.82	35.17	8.86	-1.02	43.02	Average Max	V	99	286	54	-10.98	Pass	
10602.59	27.75	6.82	-1.08	33.49	Average Max	V	98	81	54	-20.51	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 130 of 293


ARUB20 AP125 - INTEGRAL Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MBit/s)	Compliant
64	5320	ART 17	99%	a 6 Legacy	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

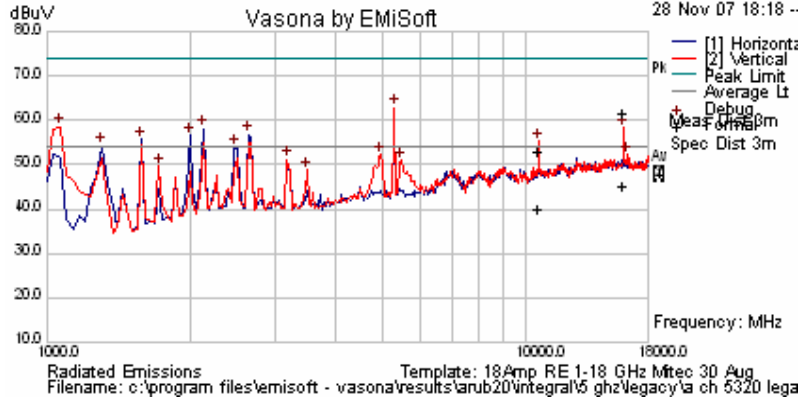

Peak Emission Scan

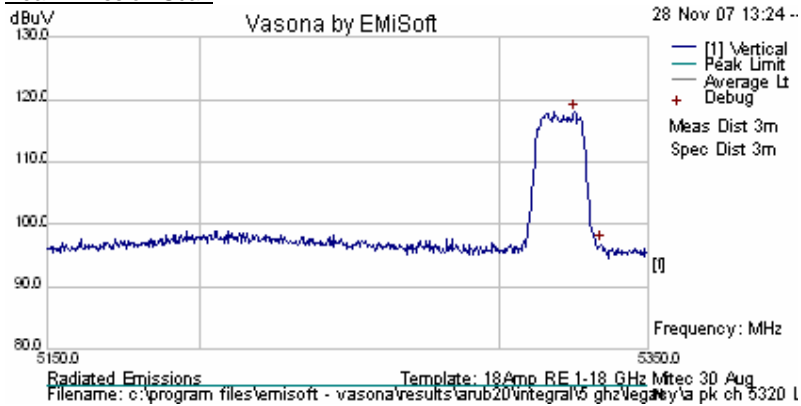

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5325.15	72.63	10.62	34.76	118.01	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
5350	ART power Setting = 16.5				Peak Max	V			74	-0.85	Pass	Band-edge
5350	ART power Setting = 16.5				Average Max	V			54	-3.34	Pass	Band-edge
15962.85	51.52	8.96	-1.01	59.47	Peak Max	V	140	322	74	-14.53	Pass	
10642.77	45.11	6.84	-1.18	50.77	Peak Max	V	137	5	74	-23.23	Pass	
15962.85	35.06	8.96	-1.01	43.01	Average Max	V	140	322	54	-10.99	Pass	
10642.77	32.35	6.84	-1.18	38.01	Average Max	V	137	5	54	-15.99	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 131 of 293



Date: 1.DEC.2007 14:35:14

802.11a Legacy Band-edge @ 5350 MHz with Integral antenna

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 132 of 293

AP125 - INTEGRAL Legacy Data Rates


ARUB20 AP125 - INTEGRAL Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MBit/s)	Compliant
100	5500	ART 17	99%	a 6 Legacy	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

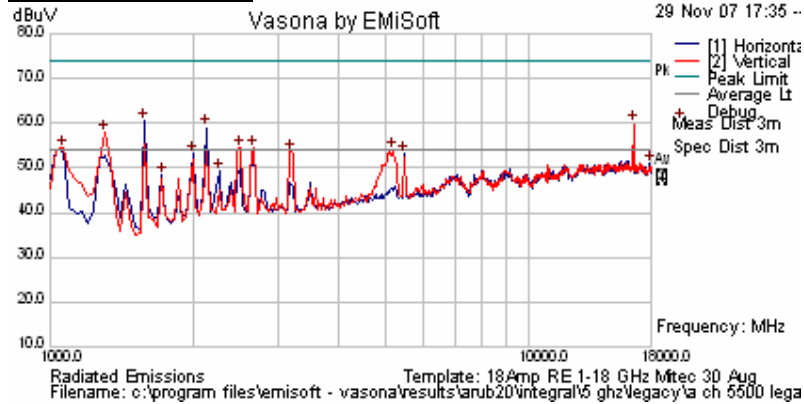

Peak Emission Scan

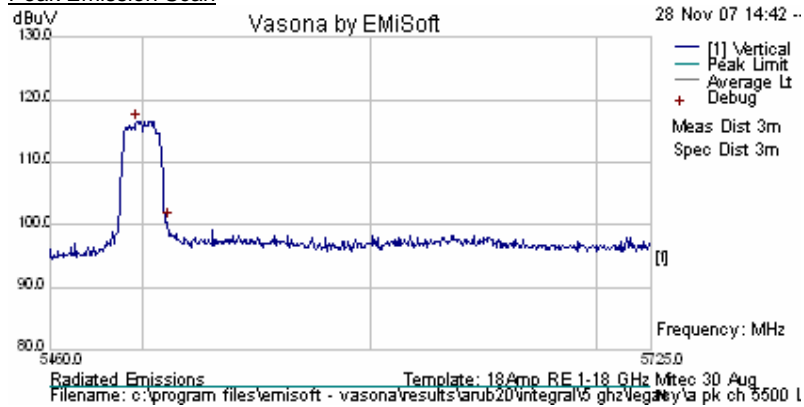

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5498.236	71.61	10.62	34.9	117.13	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
5460.000	ART Power Setting = 17.0				Peak Max	V			74	-2.69	Pass	Band-edge
5460.000	ART Power Setting = 17.0				Average Max	V			54	-5.72	Pass	Band-edge
16501.002	52.08	8.82	-0.97	59.93	Peak [Scan]	H	100	0	68.23	-8.30	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 133 of 293



Date: 1.DEC.2007 14:52:46

802.11a Legacy Band-edge @ 5460 MHz with Integral antenna

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 134 of 293


ARUB20 AP125 - INTEGRAL Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MBit/s)	Compliant
120	5600	ART 17	99%	a 6 Legacy	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

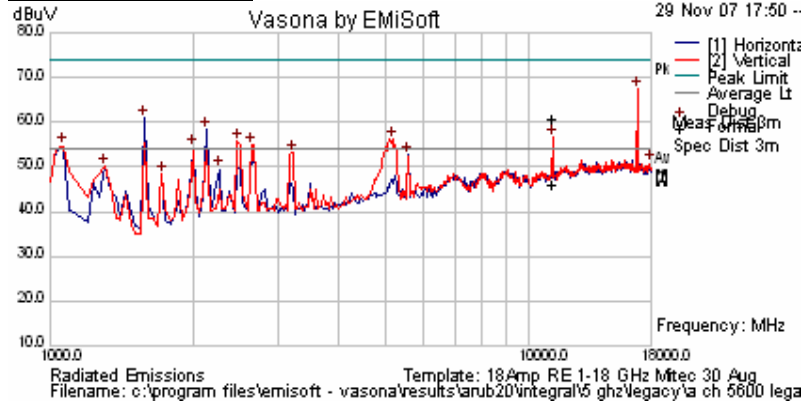

Peak Emission Scan

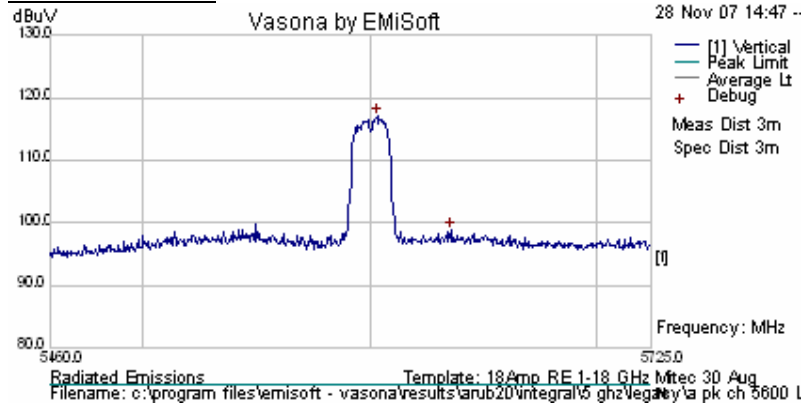

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5602.856	71.37	10.68	34.99	117.03	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
11204.57	53.7	6.9	-1.83	58.77	Peak Max	V	132	82	74	-15.23	Pass	
11204.57	39.06	6.9	-1.83	44.13	Average Max	V	132	82	54	-9.87	Pass	
16807.62	59.91	7.2	-0.99	66.12	Peak [Scan]	H	100	0	68.23	-2.11	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 135 of 293


ARUB20 AP125 - INTEGRAL Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MBit/s)	Compliant
140	5700	ART 14	99%	a 6 Legacy	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

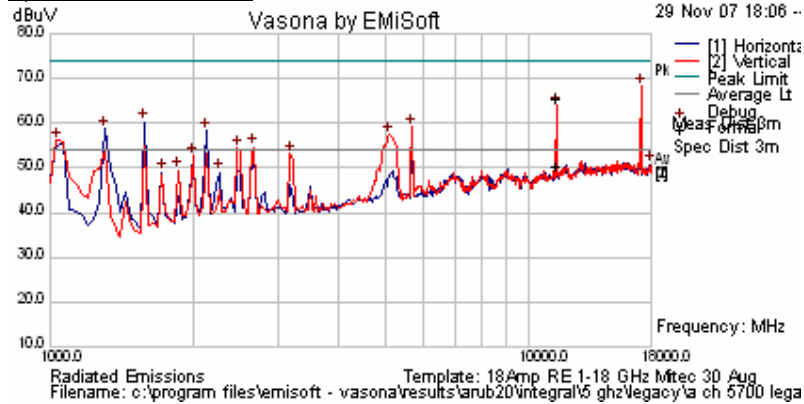

Peak Emission Scan

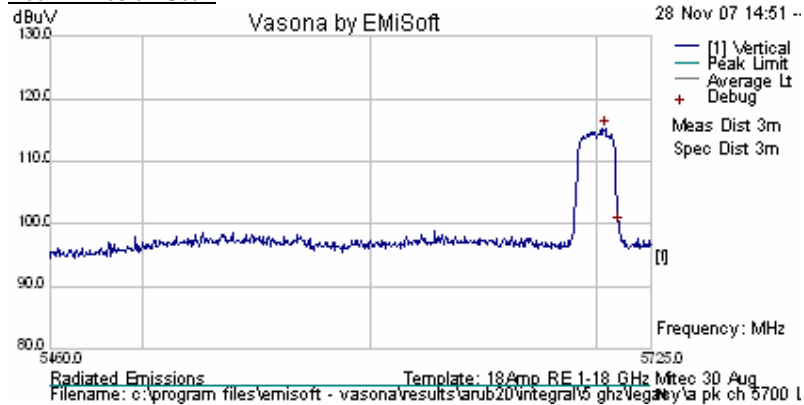

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5704.289	69.45	10.73	35.07	115.25	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
11405.85	58.34	6.82	-1.73	63.43	Peak Max	V	111	81	74	-10.57	Pass	
11405.85	43.27	6.82	-1.73	48.36	Average Max	V	111	81	54	-5.64	Pass	
17114.23	58.41	6.37	-0.74	64.04	Peak [Scan]	H	100	0	68.23	-4.19	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 136 of 293

AP125: 5150-5250GHz INTEGRAL HT-20 Data Rates


ARUB20 AP125 - INTEGRAL Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
36	5180	ART 17	99%	6.5 HT-20	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

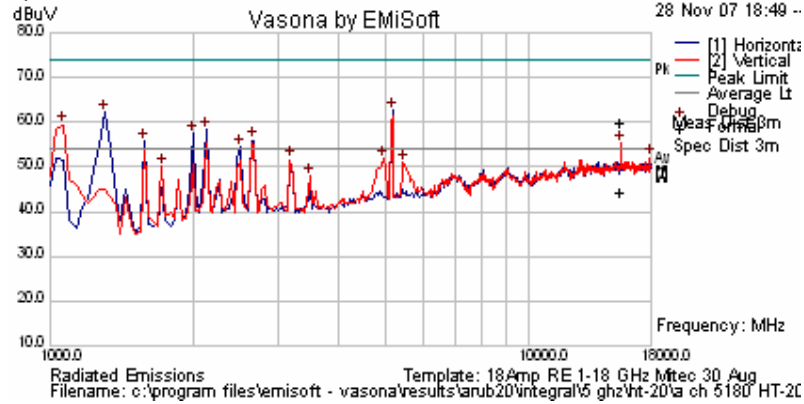

Peak Emission Scan

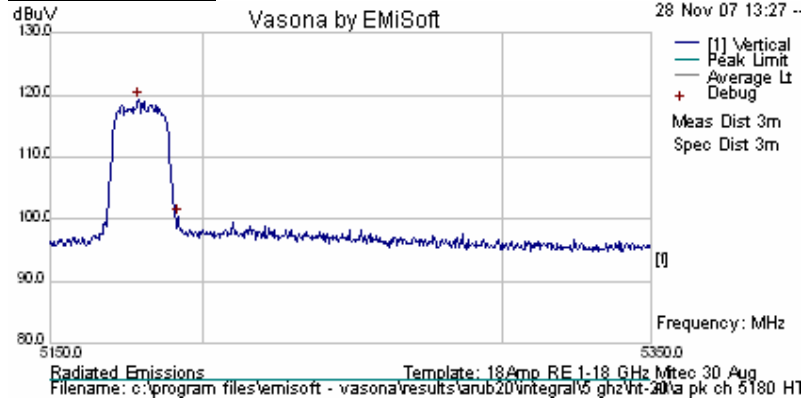


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5179.259	73.87	10.62	34.65	119.14	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
5150.000	ART Power Setting = 16.5				Peak Max				74	-0.63	Pass	Band-edge
5150.000	ART Power Setting = 16.5				Average Max				54	-1.18	Pass	Band-edge
15541.09	50.74	8.28	-1.03	57.98	Peak Max	V	98	283	74	-16.02	Pass	
15541.09	35.03	8.28	-1.03	42.28	Average Max	V	98	283	54	-11.72	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 137 of 293

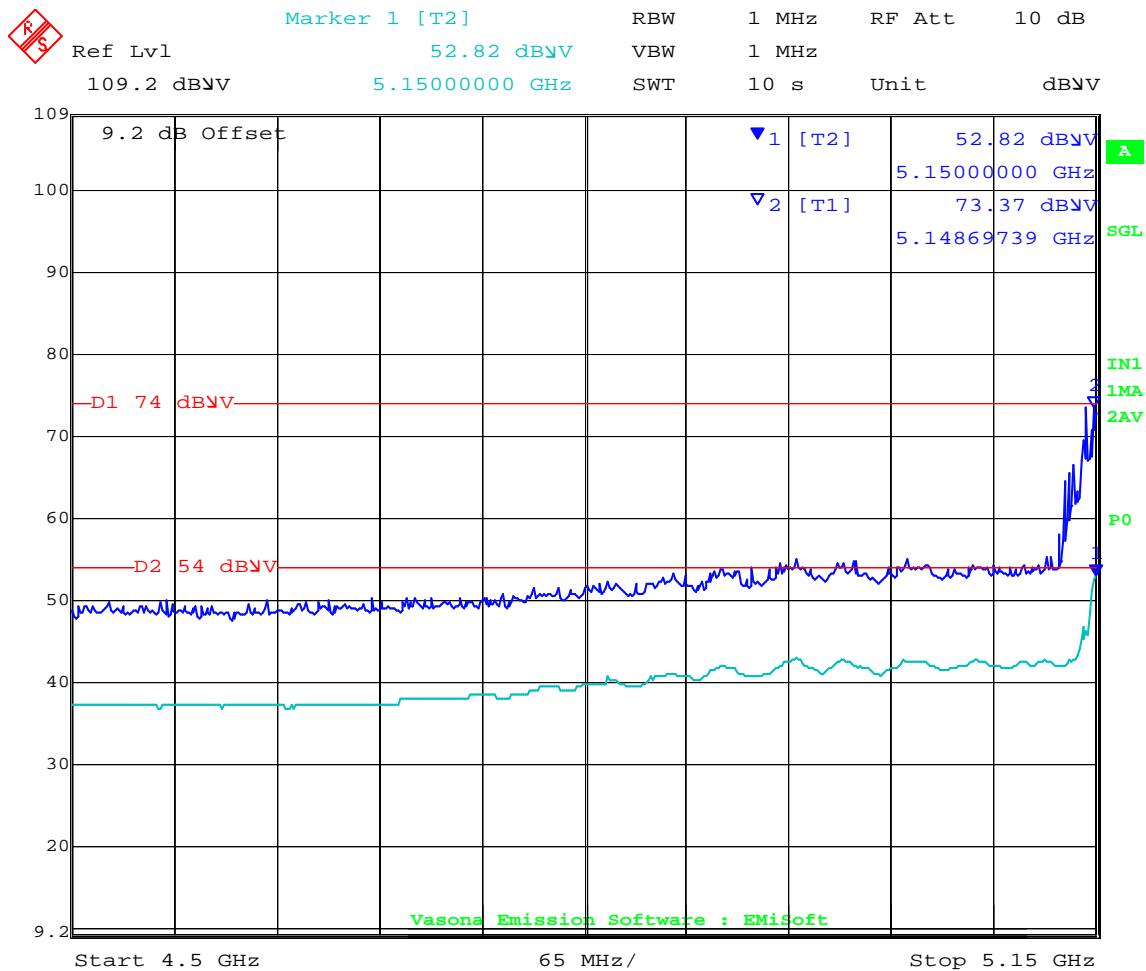

Date: 1.DEC.2007 14:22:00

HT-20 Band-edge @ 5150 MHz - Integral antenna

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 138 of 293


ARUB20 AP125 - INTEGRAL Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
40	5200	ART 17	99%	6.5 HT-20	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

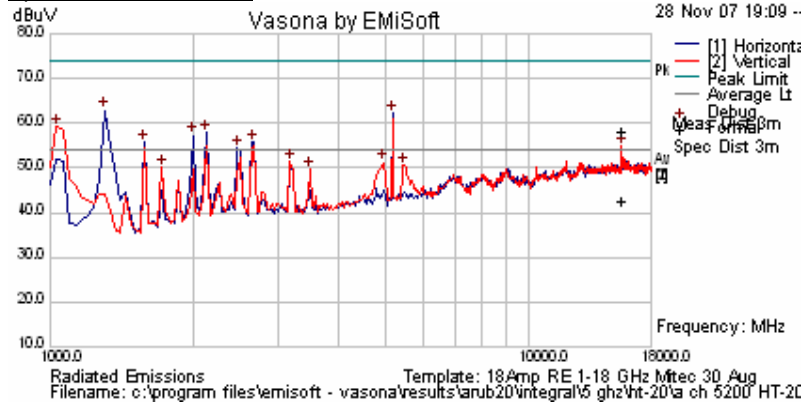

Peak Emission Scan

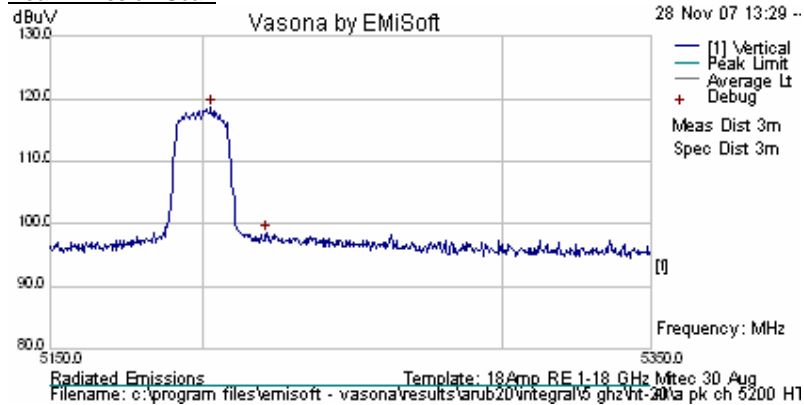

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5202.906	73.18	10.62	34.67	118.46	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
15601.23	48.85	8.38	-1.17	56.06	Peak Max	V	106	288	74	-17.94	Pass	
15601.23	33.23	8.38	-1.17	40.43	Average Max	V	106	288	54	-13.57	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 139 of 293


ARUB20 AP125 - INTEGRAL Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
48	5240	ART 17	99%	6.5 HT-20	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

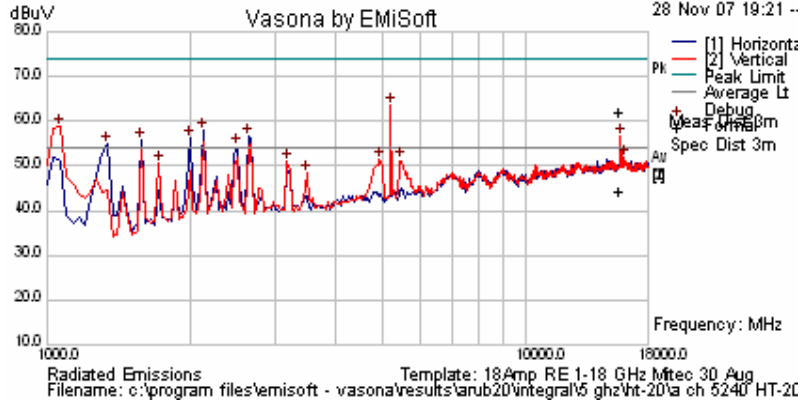

Peak Emission Scan

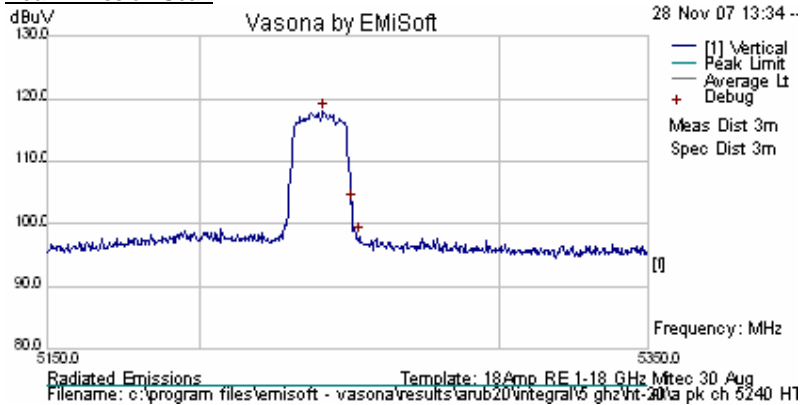

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5240.982	72.65	10.62	34.7	117.97	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
15721.5	52.62	8.57	-1.09	60.09	Peak Max	V	141	285	74	-13.91	Pass	
15721.5	34.99	8.57	-1.09	42.47	Average Max	V	141	285	54	-11.53	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 140 of 293

AP125: 5250-5350GHz INTEGRAL HT-20 Data Rates


ARUB20 AP125 - INTEGRAL Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
52	5260	ART 17	99%	6.5 HT-20	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

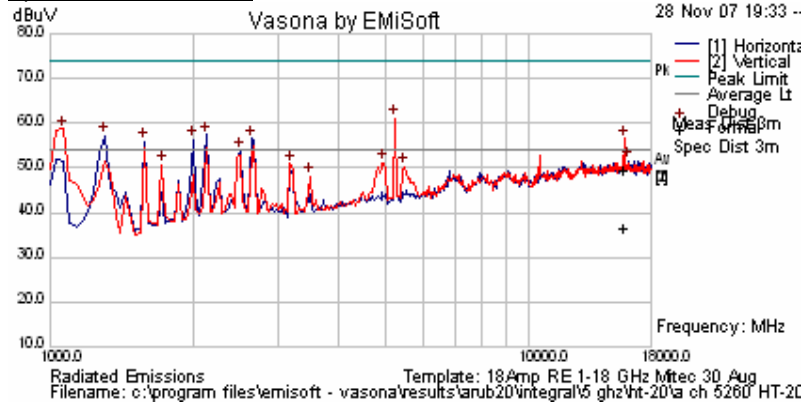

Peak Emission Scan

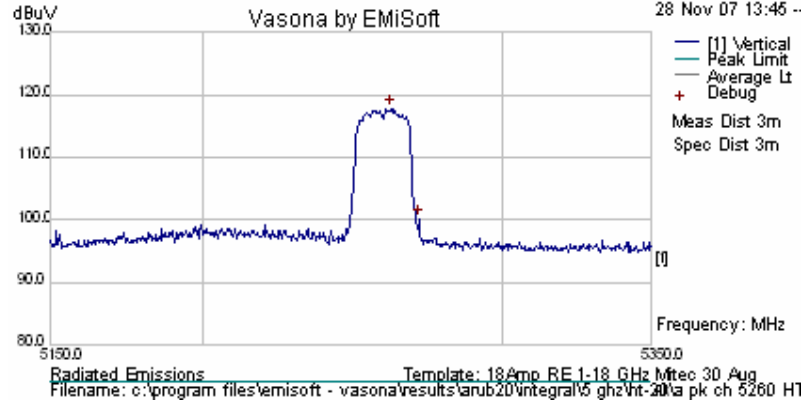

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5262.625	72.42	10.62	34.71	117.76	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
15781.57	39.9	8.67	-1.12	47.45	Peak Max	V	134	-3	74	-26.55	Pass	
15781.57	26.89	8.67	-1.12	34.44	Average Max	V	134	-3	54	-19.56	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 141 of 293


ARUB20 AP125 - INTEGRAL Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
60	5300	ART 17	99%	6.5 HT-20	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

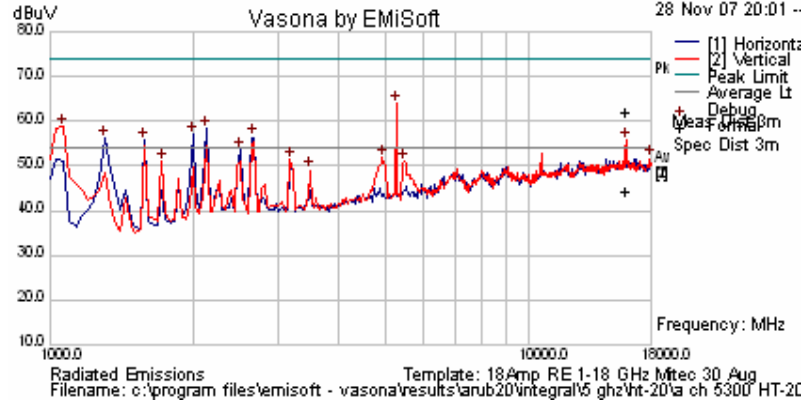

Peak Emission Scan

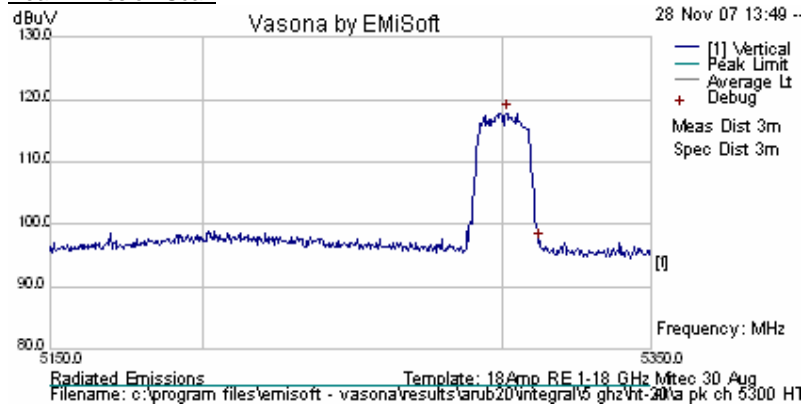

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5301.503	72.47	10.62	34.75	117.83	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
15901.84	52.19	8.86	-1.02	60.04	Peak Max	V	139	284	74	-13.96	Pass	
15901.84	34.54	8.86	-1.02	42.39	Average Max	V	139	284	54	-11.61	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 142 of 293


ARUB20 AP125 - INTEGRAL Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
64	5320	ART 17	99%	6.5 HT-20	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

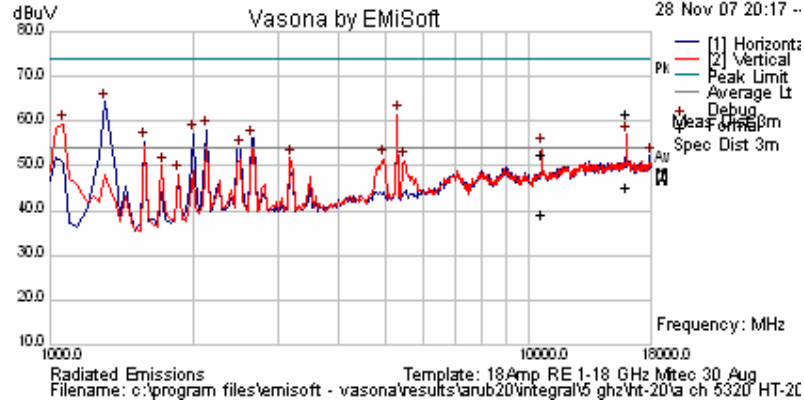

Peak Emission Scan

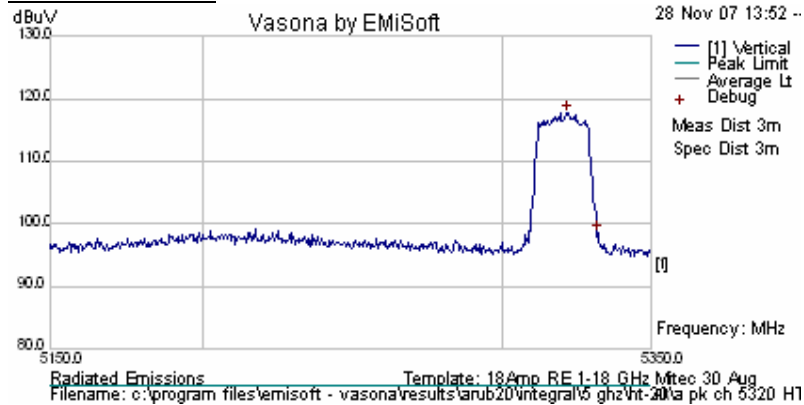


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5321.543	72.32	10.62	34.76	117.7	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
5350.000	ART power Setting = 11.5				Peak Max	V			74	-0.97	Pass	Band-edge
5350.000	ART power Setting = 11.5				Average Max	v			54	-2.41	Pass	Band-edge
15962.91	51.78	8.96	-1.01	59.73	Peak Max	V	123	331	74	-14.27	Pass	
10641.28	44.84	6.83	-1.18	50.5	Peak Max	V	102	293	74	-23.5	Pass	
15962.91	35.18	8.96	-1.01	43.13	Average Max	V	123	331	54	-10.87	Pass	
10641.28	31.53	6.83	-1.18	37.18	Average Max	V	102	293	54	-16.82	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 143 of 293

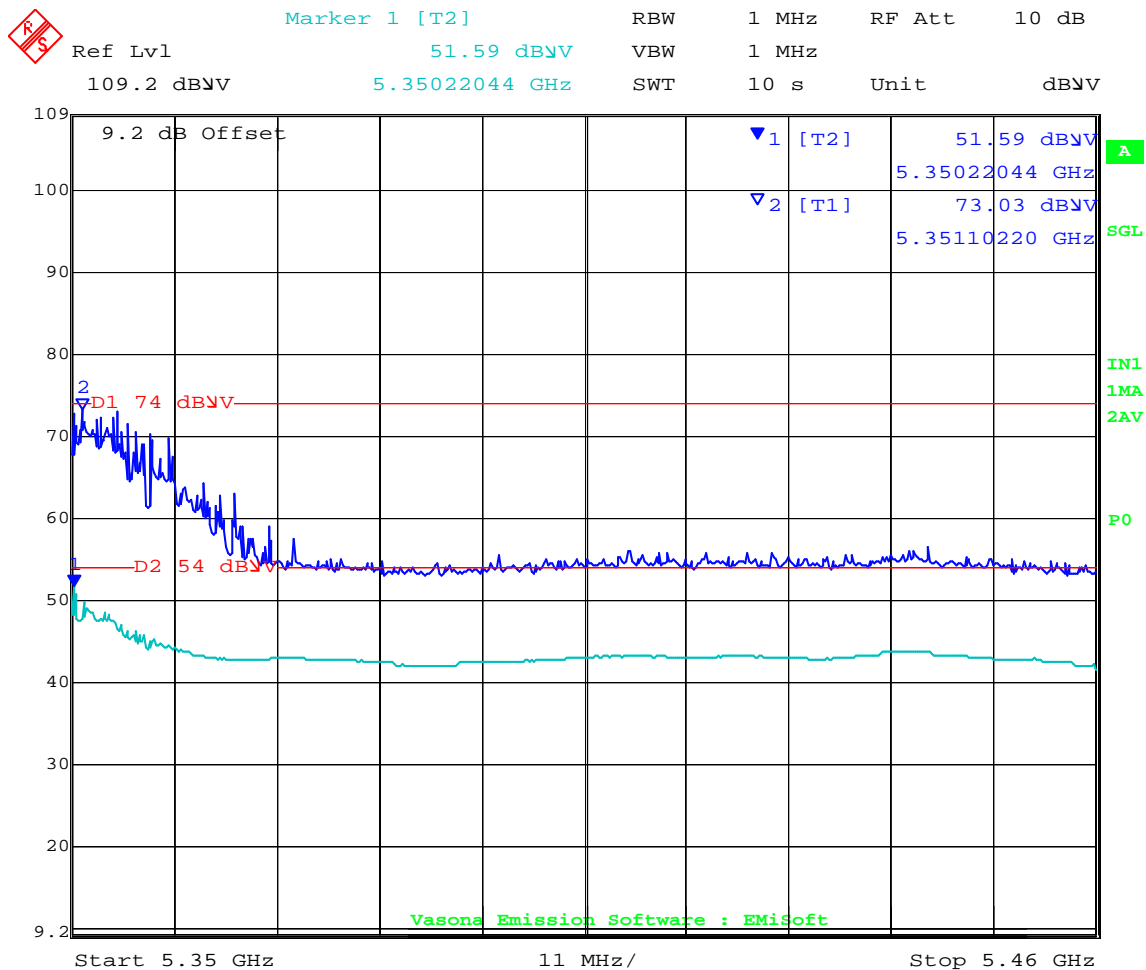

Date: 1.DEC.2007 14:37:31
HT-20 Band-edge @ 5350 MHz - Integral antenna

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 144 of 293

AP125: 5460-5725 MHz INTEGRAL HT-20 Data Rates


ARUB20 AP125 - INTEGRAL Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
100	5500	ART 17	99%	6.5 HT-20	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

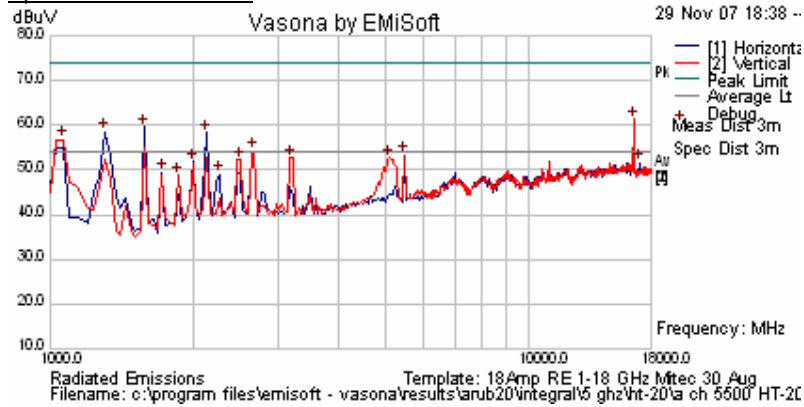

Peak Emission Scan

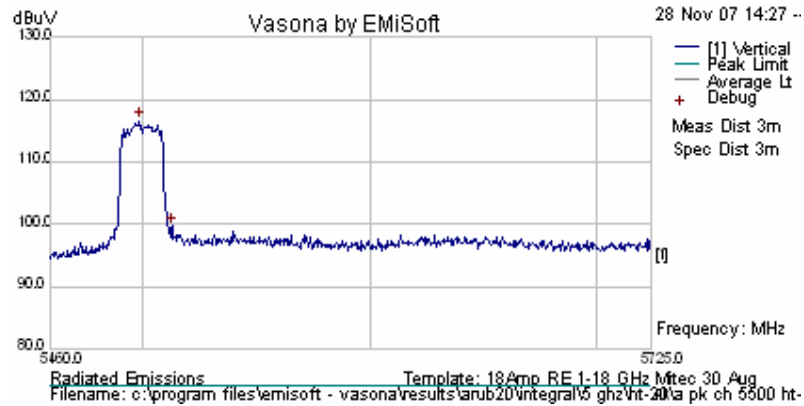


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5498.768	71.02	10.62	34.9	116.54	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
16535.07	53.65	8.8	-0.95	61.49	Peak [Scan]	V	100	0	68.23	-6.74	Pass	
5460.000	ART Power Setting = 16.5				Peak Max	V			74	-3.16	Pass	Band-edge
5460.000	ART Power Setting = 16.5				Average Max	V			54	-5.88	Pass	Band-edge

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 145 of 293

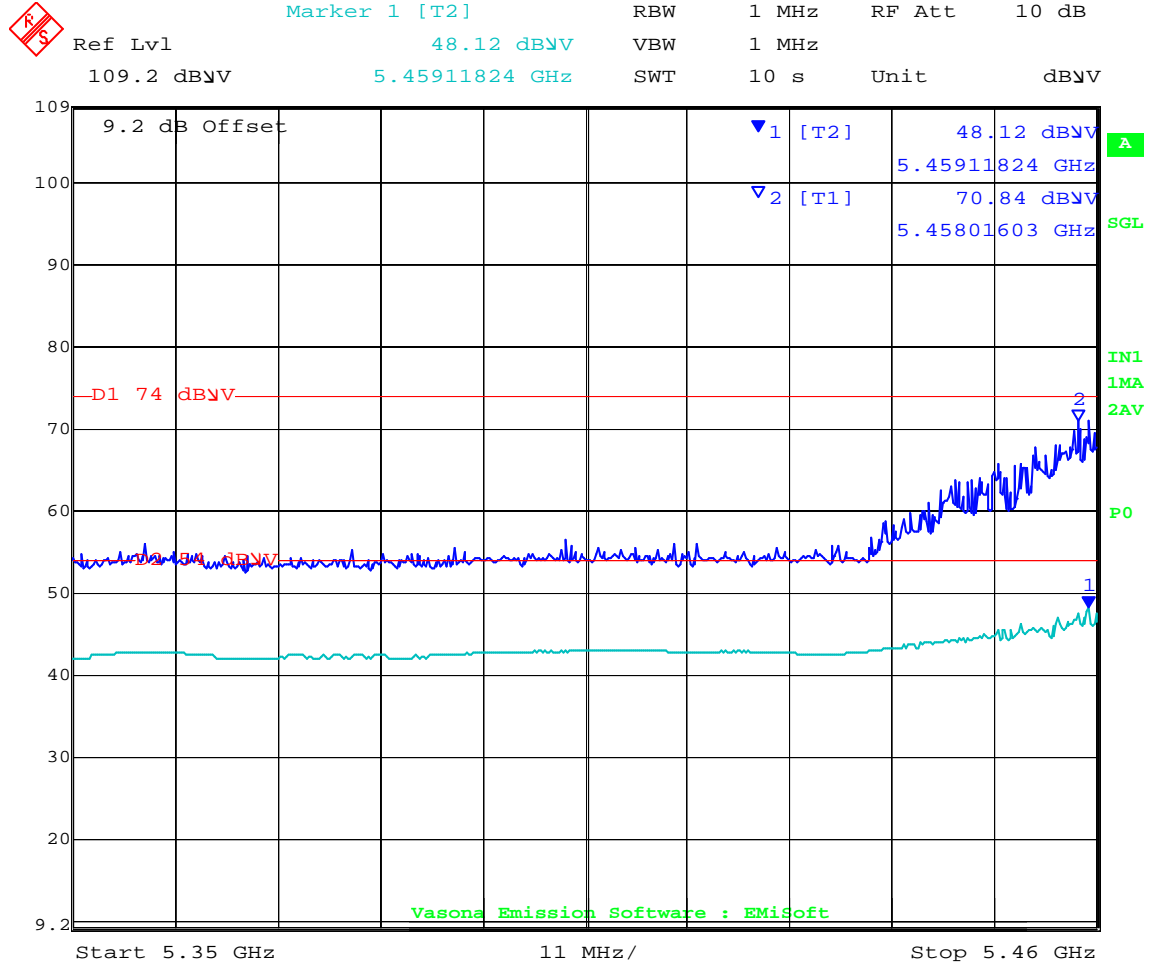

Date: 1.DEC.2007 14:51:07

HT-20 Band-edge @ 5460 MHz - Integral antenna

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 146 of 293


ARUB20 AP125 - INTEGRAL Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
120	5600	ART 17	99%	6.5 HT-20	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

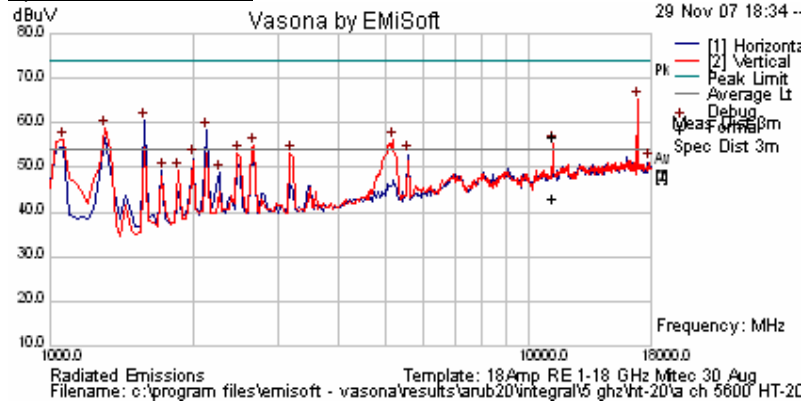

Peak Emission Scan

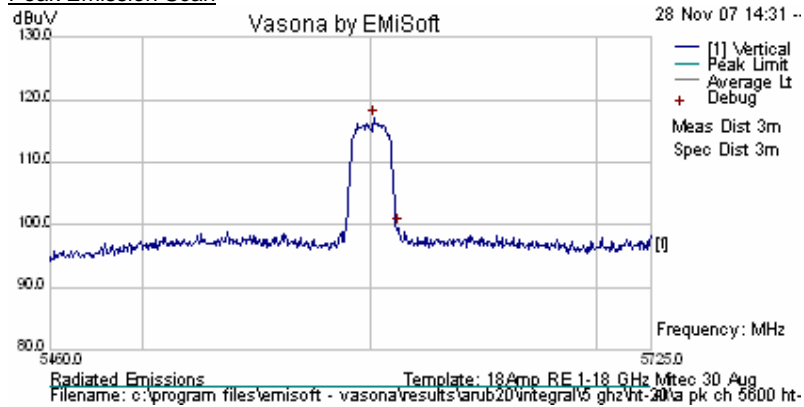

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5601.263	71.32	10.68	34.98	116.98	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
11202.44	49.98	6.9	-1.84	55.04	Peak Max	V	133	85	74	-18.96	Pass	
11202.44	35.87	6.9	-1.84	40.94	Average Max	V	133	85	54	-13.06	Pass	
16807.62	57.61	8.6	-0.99	65.22	Peak [Scan]	H	100	0	68.23	-3.01	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 147 of 293


ARUB20 AP125 - INTEGRAL Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
140	5700	ART 14	99%	6.5 HT-20	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

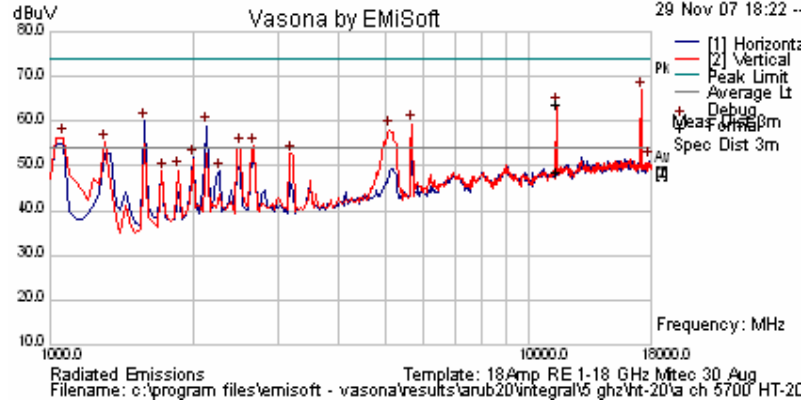

Peak Emission Scan

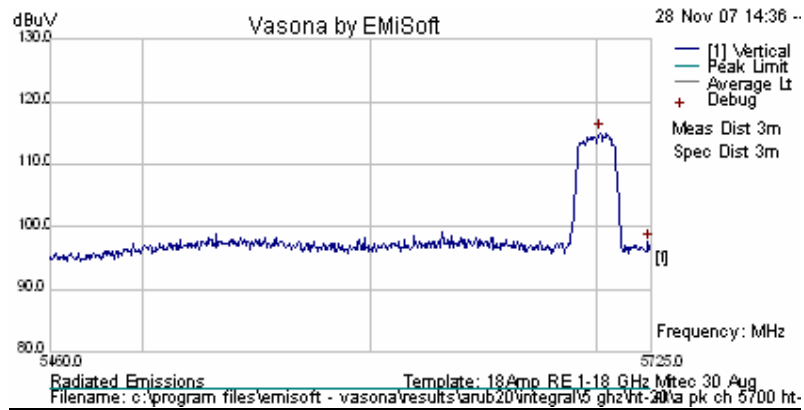

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5701.633	69.19	10.73	35.07	114.99	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
11390.78	56.77	6.83	-1.74	61.86	Peak Max	V	130	85	74	-12.14	Pass	
11390.78	41.41	6.83	-1.74	46.49	Average Max	V	130	85	54	-7.51	Pass	
17114.23	59.09	6.37	-0.74	64.72	Peak [Scan]	H	100	0	68.23	-3.51	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 148 of 293


AP125: 5150-5250GHz INTEGRAL HT-40 Data Rates

ARUB20 AP125 - INTEGRAL Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
	5190	ART 17	99%	13.5 HT-40	Yes


Three antennas operating simultaneously

NRB = None Restrictive Band

Spurious Emission Scan

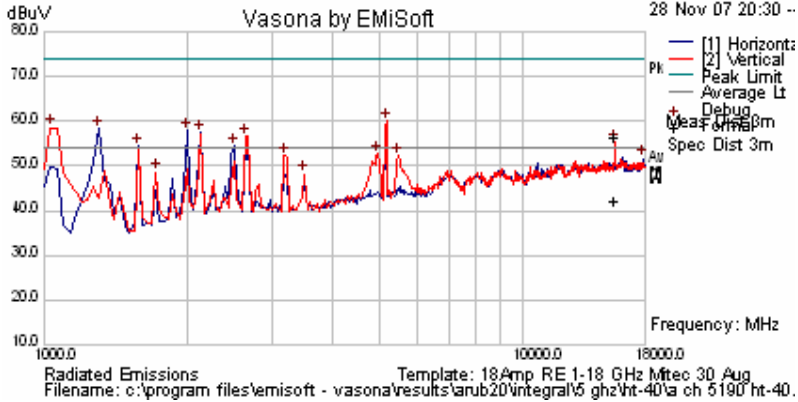

Peak Emission Scan

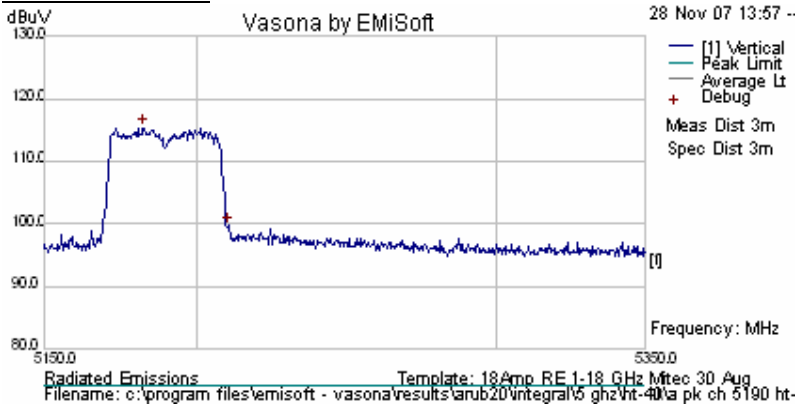

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5182.866	70.02	10.62	34.65	115.29	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
5150.000	ART Power Setting = 13.0				Peak Max	V			74	-1.40	Pass	Band-edge
5150.000	ART Power Setting = 13.0				Average Max	V			54	-0.90	Pass	Band-edge
15573.16	47.32	8.33	-1.2	54.46	Peak Max	V	137	288	74	-19.54	Pass	
15573.16	33.12	8.33	-1.2	40.25	Average Max	V	137	288	54	-13.75	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 149 of 293



Date: 1.DEC.2007 14:18:30

HT-40 Band-edge @ 5150 MHz - Integral antenna

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 150 of 293


ARUB20 AP125 - INTEGRAL Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
	5230	ART 17	99%	13.5 HT-40	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

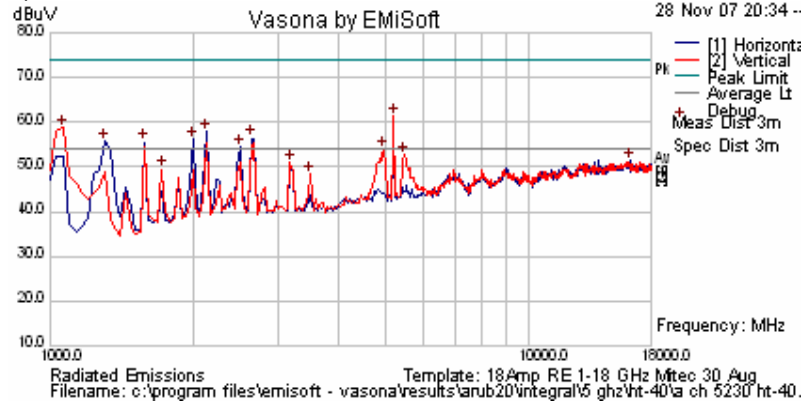

Peak Emission Scan

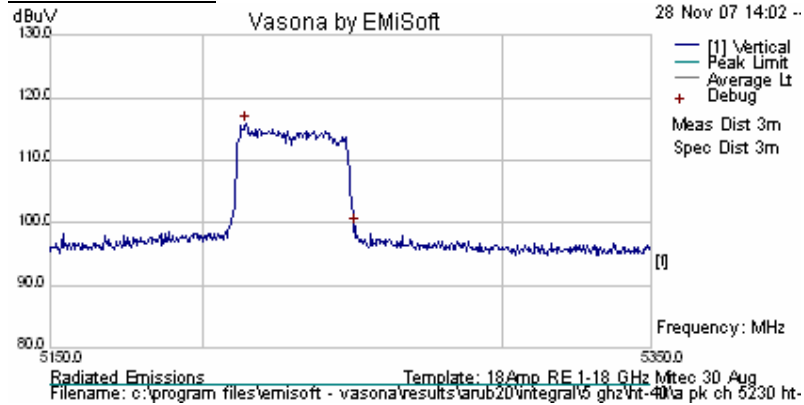

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5214.529	70.49	10.62	34.68	115.79	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 151 of 293


ARUB20 AP125 - INTEGRAL Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
	5270	ART 17	99%	13.5 HT-40	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

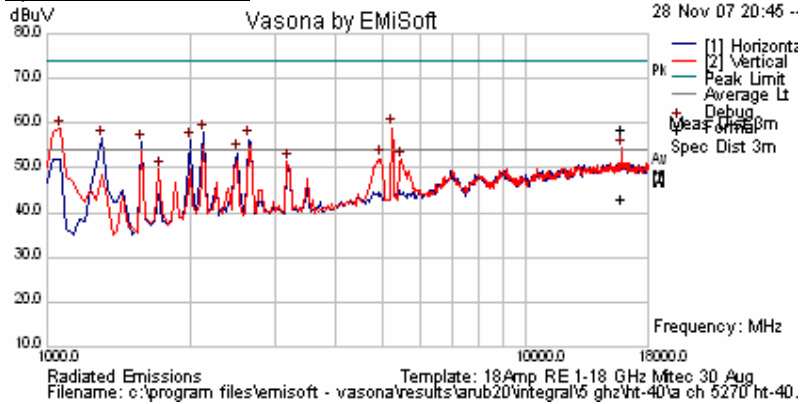

Peak Emission Scan

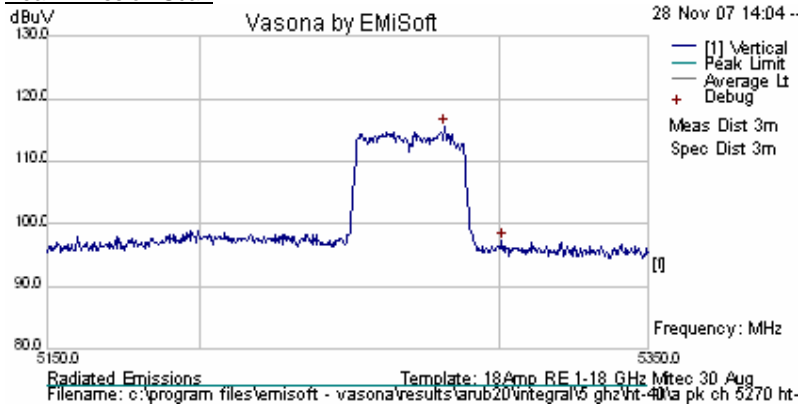

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5281.463	70.12	10.62	34.73	115.47	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
15815.64	48.98	8.72	-1.03	56.67	Peak Max	V	122	286	74	-17.33	Pass	
15815.64	33.47	8.72	-1.03	41.16	Average Max	V	122	286	54	-12.84	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 152 of 293


ARUB20 AP125 - INTEGRAL Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
	5310	ART 17	99%	13.5 HT-40	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

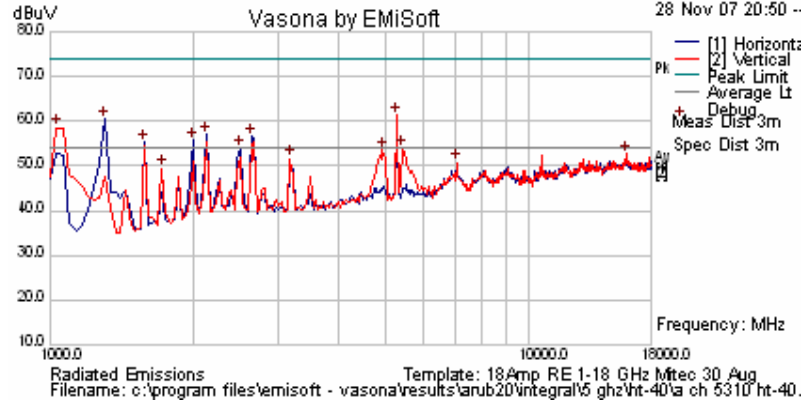

Peak Emission Scan

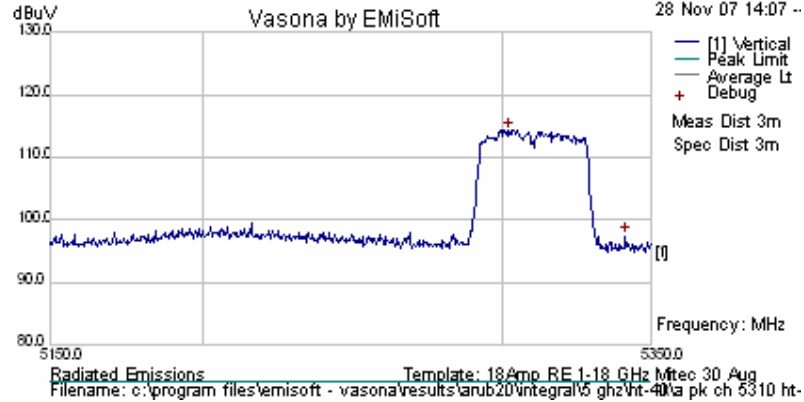

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5301.904	68.95	10.62	34.75	114.32	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
5350.000	ART power Setting = 13.5				Peak Max	V			74	-0.36	Pass	Band-edge
5350.000	ART power Setting = 13.5				Average Max	V			54	-1.18	Pass	Band-edge

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 153 of 293



Date: 1.DEC.2007 14:40:39

HT-40 Band-edge @ 5350 MHz - Integral antenna

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 154 of 293

AP125: 5470-5725 MHz INTEGRAL HT-40 Data Rates


ARUB20 AP125 - INTEGRAL Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
	5510	ART 17	99%	13.5 HT-40	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

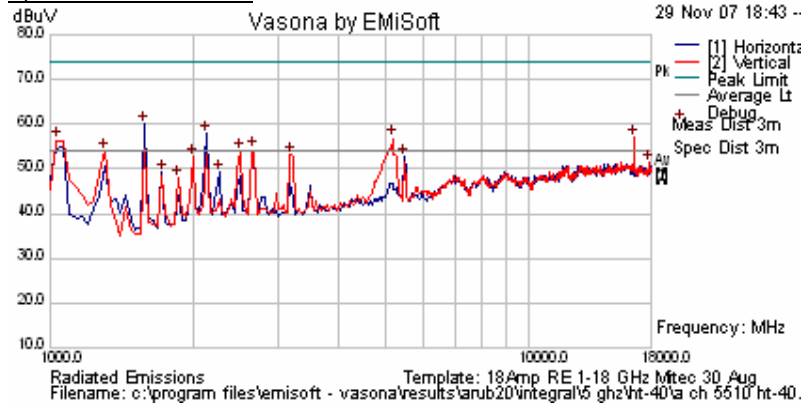

Peak Emission Scan

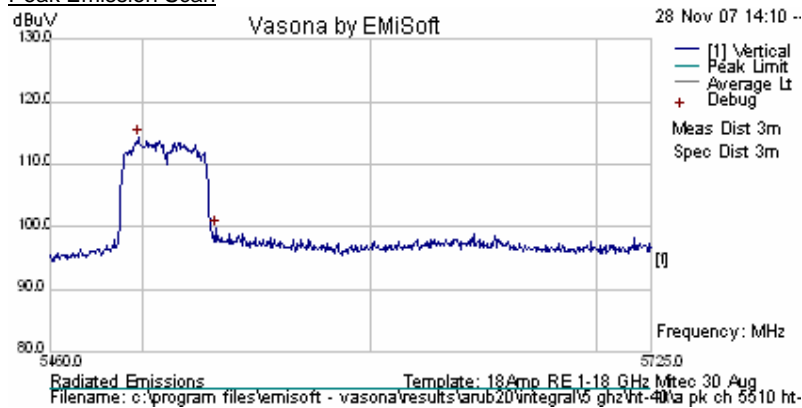


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5498.236	68.74	10.62	34.9	114.26	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
5460.000	ART Power Setting = 14.5				Peak Max	V			74	-1.51	Pass	Band-edge
5460.000	ART Power Setting = 14.5				Average Max	V			54	-2.52	Pass	Band-edge
16535.07	49.15	8.8	-0.95	56.99	Peak [Scan]	V	100	0	68.23	-11.24	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 155 of 293

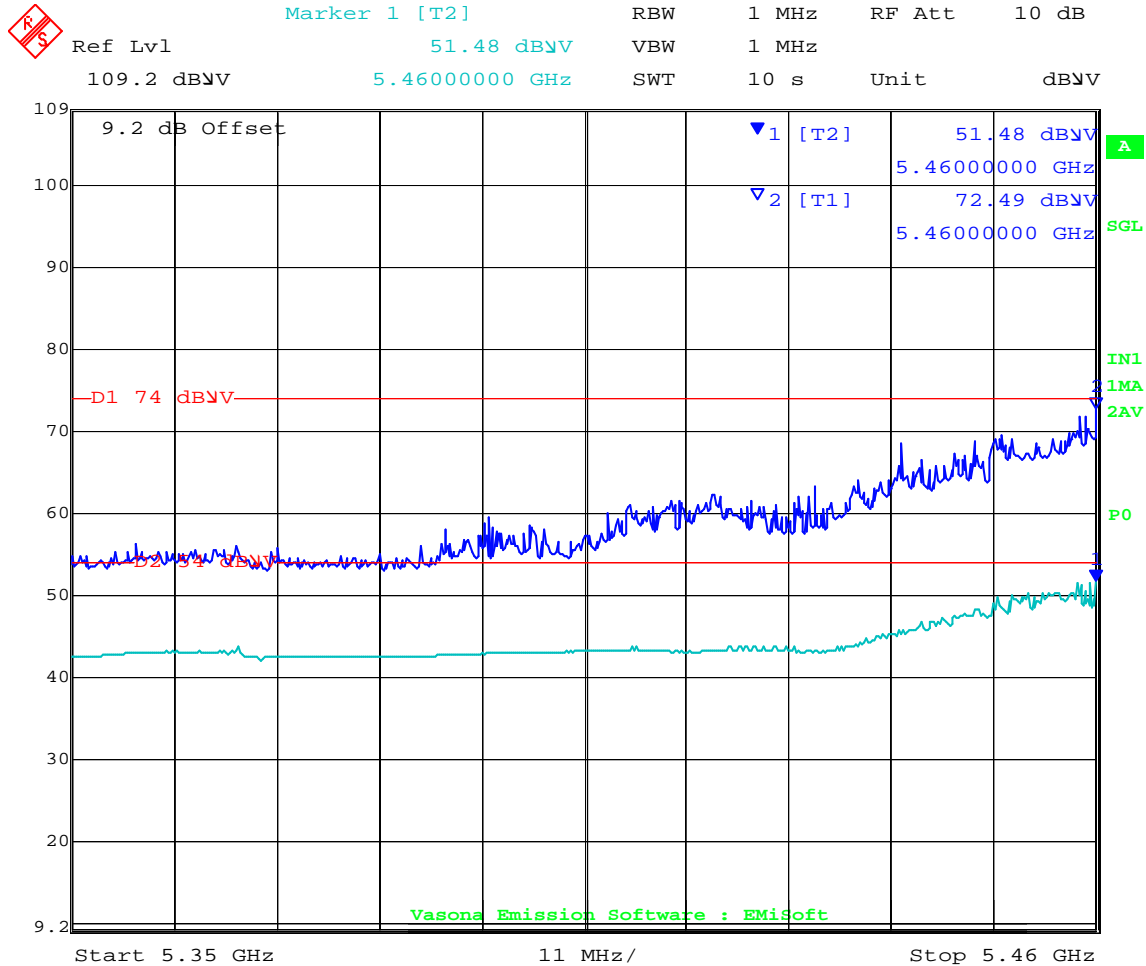

Date: 1.DEC.2007 14:48:05

HT-40 Band-edge @ 5460 MHz - Integral antenna

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 156 of 293


ARUB20 AP125 - INTEGRAL Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
	5620	ART 17	99%	13.5 HT-40	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

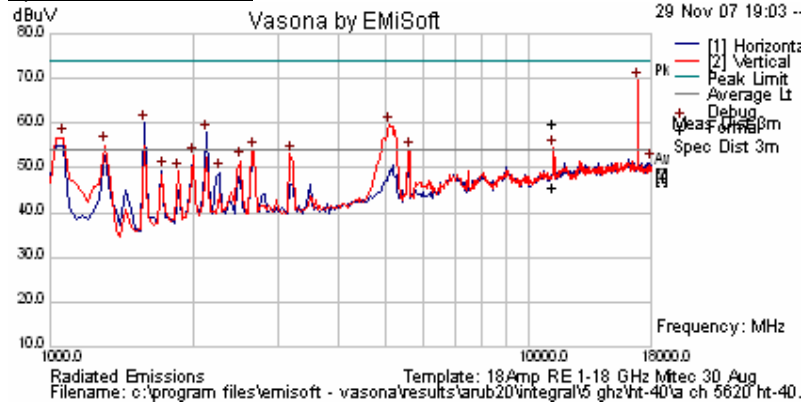

Peak Emission Scan

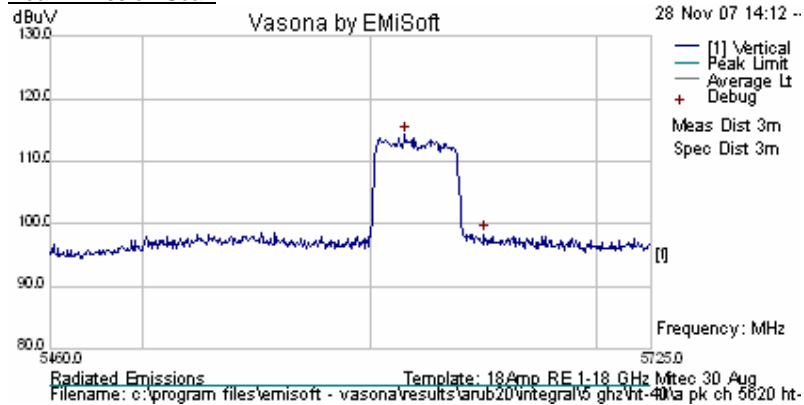

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5615.07	68.64	10.68	35	114.32	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
11244.51	52.62	6.88	-1.83	57.66	Peak Max	V	98	81	74	-16.34	Pass	
11244.51	38.39	6.88	-1.83	43.44	Average Max	V	98	81	54	-10.56	Pass	
16875.75	60.53	7.16	-0.97	66.72	Peak [Scan]	H	100	0	68.23	-1.51	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 157 of 293


ARUB20 AP125 - INTEGRAL Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
	5690	ART 17	99%	13.5 HT-40	Yes

Three antennas operating simultaneously


NRB = None Restrictive Band

*Reduction in output power required to bring into compliance

Spurious Emission Scan

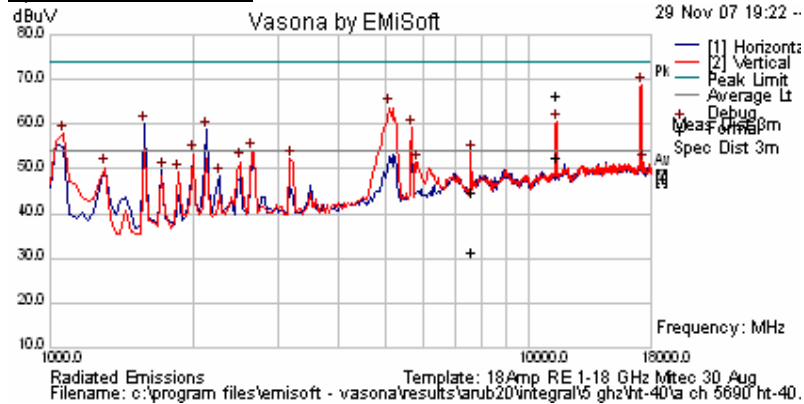

Peak Emission Scan

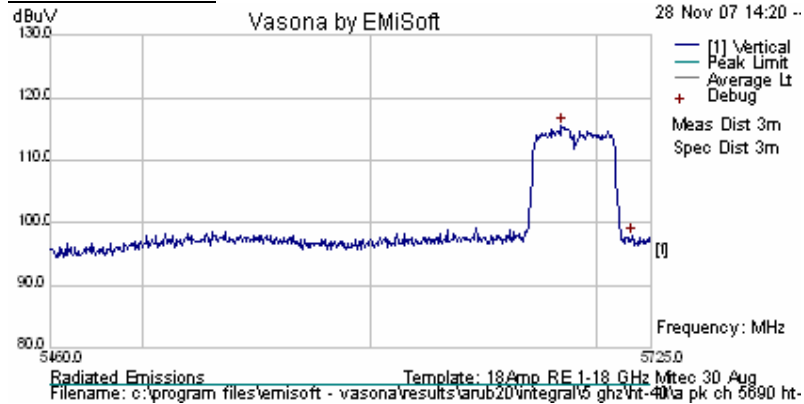

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5684.639	69.64	10.72	35.05	115.41	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
11380.78	59.13	6.83	-1.76	64.21	Peak Max	V	131	61	74	-9.79	Pass	
7586.423	41.08	5.5	-3.72	42.86	Peak Max	V	140	344	74	-31.14	Pass	
11380.78	45.53	6.83	-1.76	50.61	Average Max	V	131	61	54	-3.39	Pass	
7586.423	27.7	5.5	-3.72	29.48	Average Max	V	140	344	54	-24.52	Pass	
17114.23	58.98	7.54	-0.74	65.78	Peak [Scan]	H	100	0	68.23	-2.45	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



ARUB20 AP-125 (ANT-10)
ART Settings V Aggregate Measured Power

The following matrix identifies the ART power setting V's each output chain. The aggregate power was also measured for all three chains.

As a result of either spurious emissions (harmonic) or band-edge issues the power was reduced to bring the unit into compliance.

Configuration	ART Power Setting	Tx 1 Measured Pwr (dBm)	Tx 2 Measured Pwr (dBm)	Tx 3 Measured Pwr (dBm)	Aggregate Measured Pwr (dBm)
Legacy a (5150 5180 MHz)BE	14	11.83	11.74	12.61	17.3
Legacy a (5350 5320 MHz)BE	14.5	12.04	12.55	11.84	17.58
Legacy a (5460 5150 5745 MHz)BE	16	13.10	12.95	14.10	19.02
Legacy a (5460 5500 MHz)BE	15	13.09	13.04	12.26	18.79
HT-20					
HT-20 (5150 5180 MHz)BE	13	10.92	10.71	11.44	15.51
HT-20 (5350 5320 MHz)BE	14	11.43	11.82	11.16	16.89
HT-20 (5460 5150 5745 MHz)BE	16	13.00	13.00	13.84	18.87
HT-20 (5460 5500 MHz)BE	15	13.08	13.01	13.09	18.78
HT-40					
HT-40 (5150 5190 MHz)BE	10	7.38	7.38	8.35	12.91
HT-40 (5350 5310 MHz)BE	11.5	8.92	9.56	8.90	14.41
HT-40 (5150 5190 5755 MHz)BE	14	10.67	10.65	11.48	16.76
HT-40 (5460 5510 MHz)BE	13	10.67	10.79	10.52	16.17

Note BE = Band-edge, SE – Spurious emissions




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 159 of 293

AP124: 5150-5250GHz ANT-10 (6dBi) Legacy Data Rates


ARUB20 AP124 - ANT-10 (6dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MBit/s)	Compliant
36	5180	ART 17	99%	a 6 Legacy	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

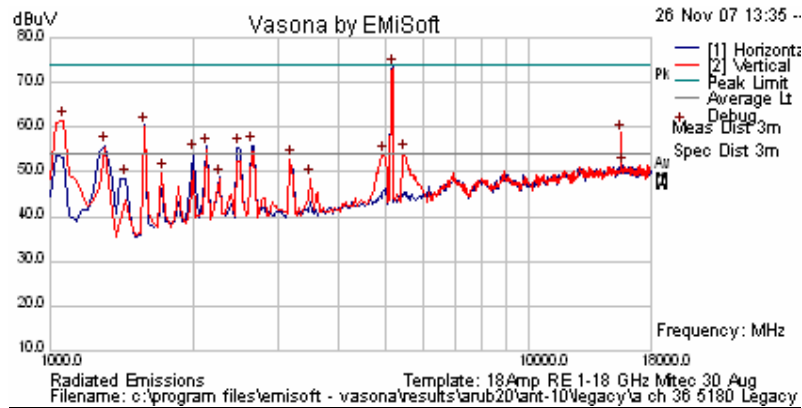

Peak Emission Scan

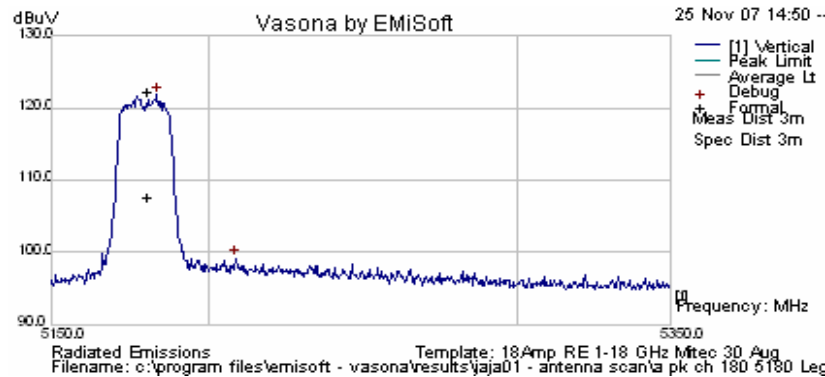


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Poi	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5183.667	76.51	10.62	34.65	121.78	Peak [Scan]	H	100	0	N/A	N/A	N/A	Fundamental
5150.000	ART Power Setting = 14				Peak Max	V			74	-3.81	Pass	Band-edge
5150.000	ART Power Setting = 14				Average Max	V			54	-5.88	Pass	Band-edge
15547.09	51.68	8.29	-1.06	58.91	Peak [Scan]	V	100	0	74	-15.09	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 160 of 293

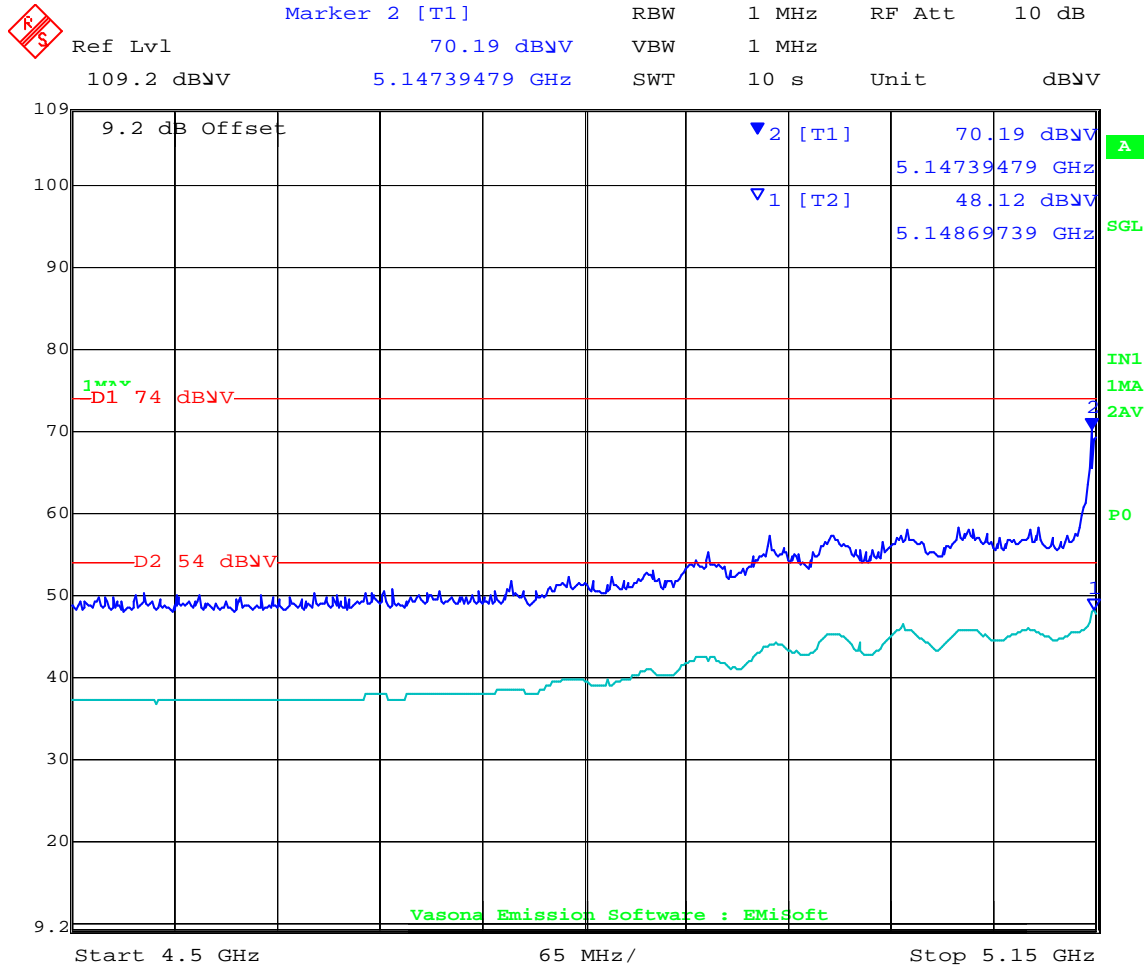

Date: 1.DEC.2007 16:19:36

802.11a Legacy Band-edge @ 5150 MHz with ANT-10

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 161 of 293

ARUB20 AP124 - ANT-10 (6dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MBit/s)	Compliant
40	5200	ART 17	99%	a 6 Legacy	Yes


Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

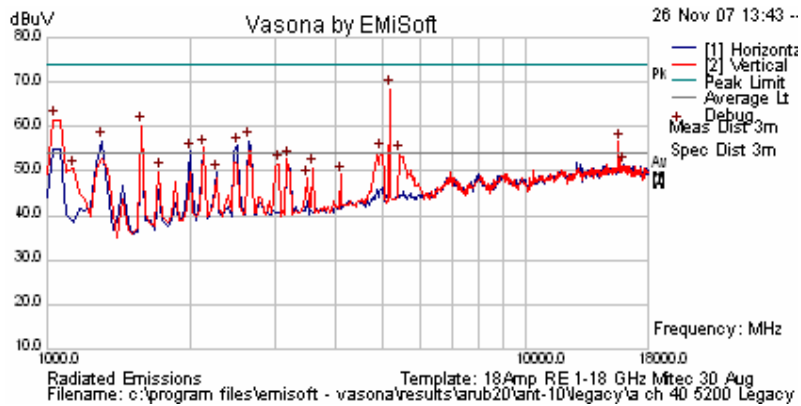

Spurious Emission Scan

Peak Emission Scan

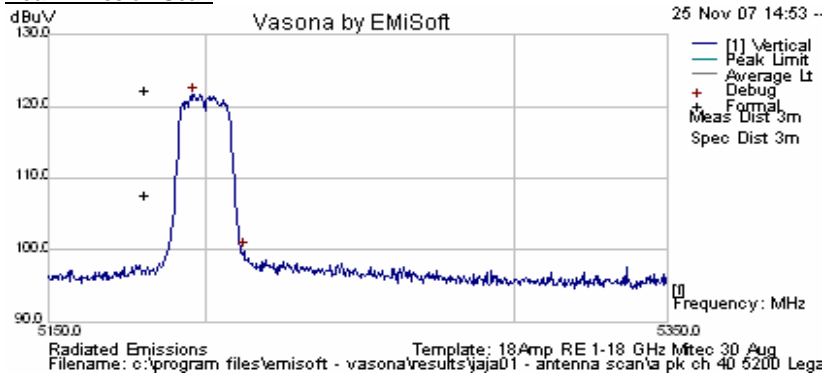

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5196.493	76.38	10.62	34.66	121.66	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
15615.23	49.26	8.4	-1.14	56.52	Peak [Scan]	V	100	0	74	-17.48	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 162 of 293

ARUB20 AP124 - ANT-10 (6dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MBit/s)	Compliant
48	5240	ART 17	99%	a 6 Legacy	Yes


Three antennas operating simultaneously

NRB = None Restrictive Band

Spurious Emission Scan

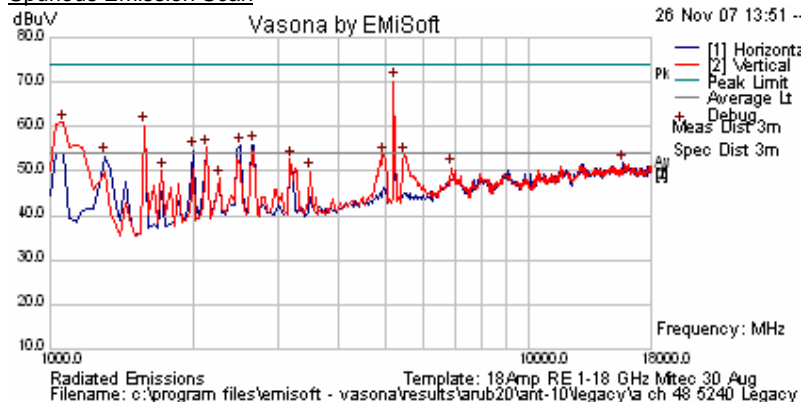

Peak Emission Scan

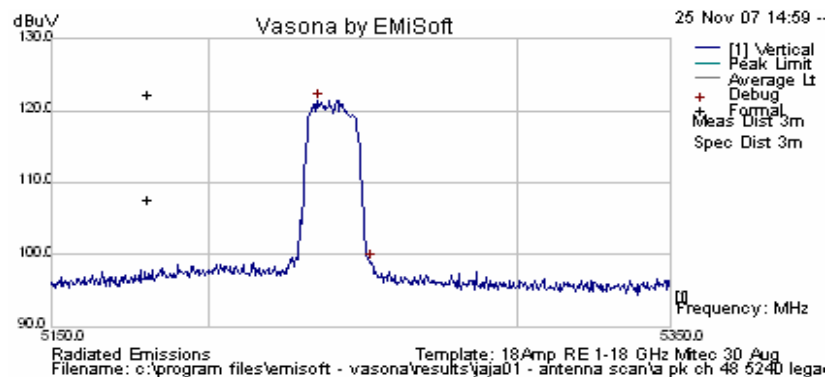

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5235.371	76.1	10.62	34.69	121.42	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 163 of 293

AP124: 5250-5350GHz ANT-10 (6dBi) Legacy Data Rates


ARUB20 AP124 - ANT-10 (6dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MBit/s)	Compliant
52	5260	ART 17	99%	a 6 Legacy	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

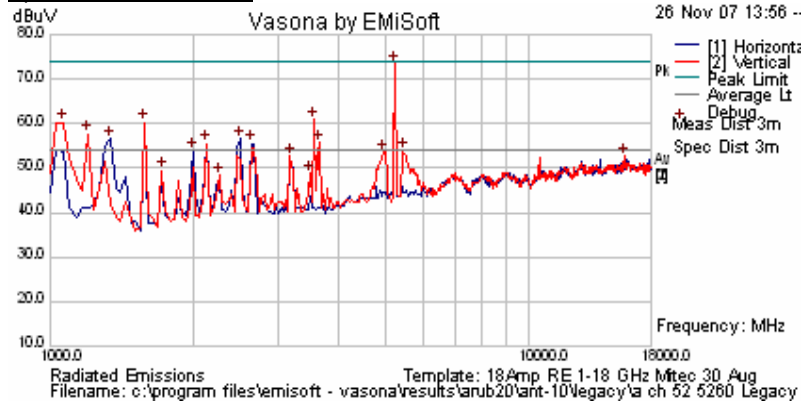

Peak Emission Scan

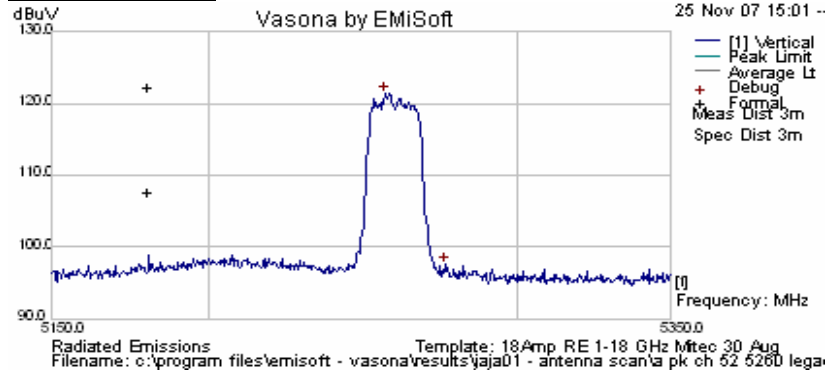

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5257.014	76.08	10.62	34.71	121.41	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 164 of 293


ARUB20 AP124 - ANT-10 (6dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MBit/s)	Compliant
60	5300	ART 17	99%	a 6 Legacy	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

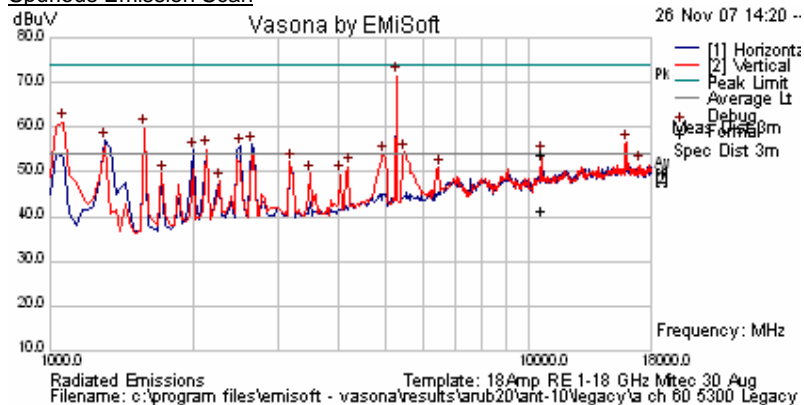

Peak Emission Scan

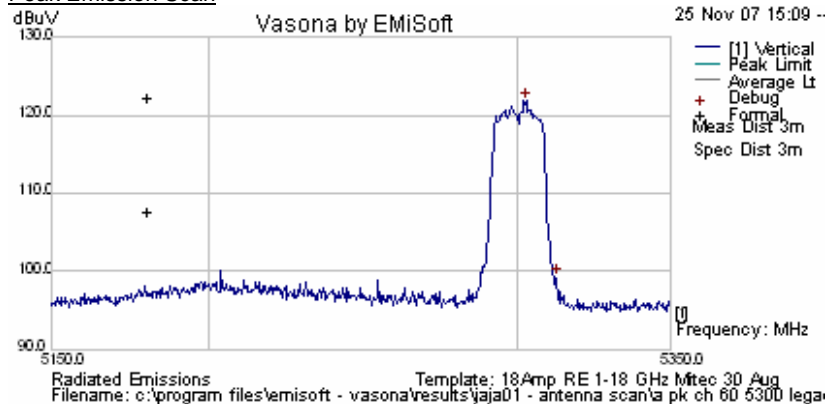

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5302.705	76.54	10.62	34.75	121.9	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
10603.22	45.92	6.82	-1.08	51.66	Peak Max	V	126	309	68.23	-16.57	Pass	
15921.84	48.64	8.9	-1.00	56.53	Peak [Scan]	V	100	0	68.23	-11.70	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 165 of 293


ARUB20 AP124 - ANT-10 (6dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MBit/s)	Compliant
64	5320	ART 17	99%	a 6 Legacy	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

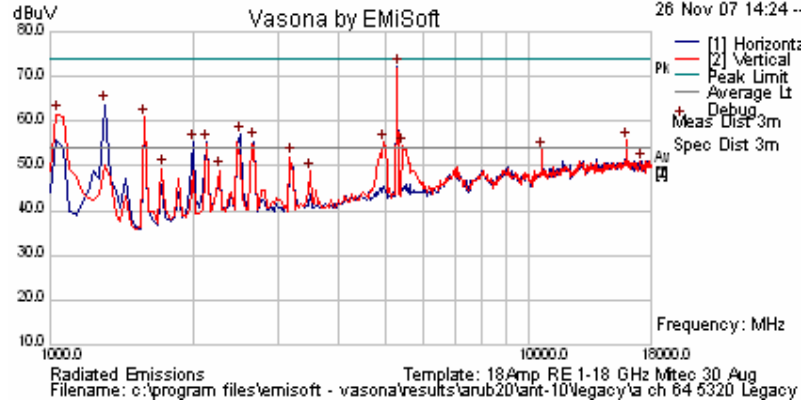

Peak Emission Scan

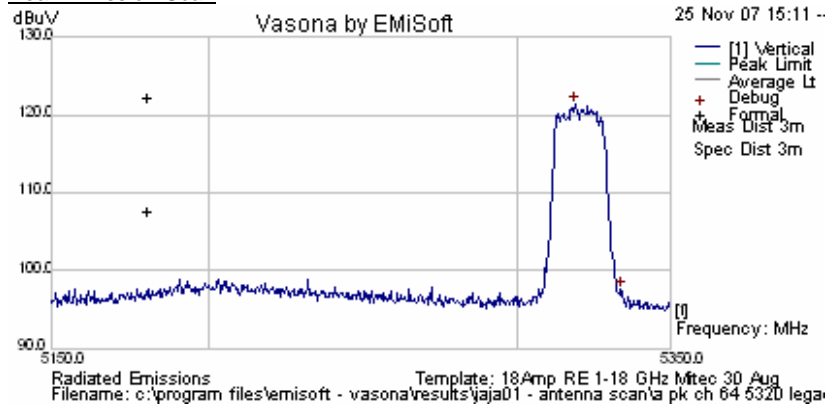

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5318.737	76.02	10.62	34.76	121.4	Peak [Scan]	V	100	0	54	67.4	N/A	Fundamental
5350	ART power Setting = 14.5				Peak Max	V			74	-3.00	Pass	Band-edge
5350	ART power Setting = 14.5				Average Max	V			54	-5.88	Pass	Band-edge
10641.2	46.29	6.82	-1.08	52.03	Peak Max	V	126	309	74	-21.97	Pass	
10641.2	33.76	6.82	-1.08	39.5	Average Max	V	126	309	54	-14.5	Pass	
15989.98	47.77	9	-1.02	55.76	Peak [Scan]	V	100	0	68.23	-12.47	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 166 of 293



Date: 1.DEC.2007 16:37:17

802.11a Legacy Band-edge @ 5350 MHz with ANT-10

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 167 of 293

AP124 - ANT-10 (6dBi) Legacy Data Rates


ARUB20 AP124 - ANT-10 (6dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MBit/s)	Compliant
100	5500	ART 17	99%	a 6 Legacy	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

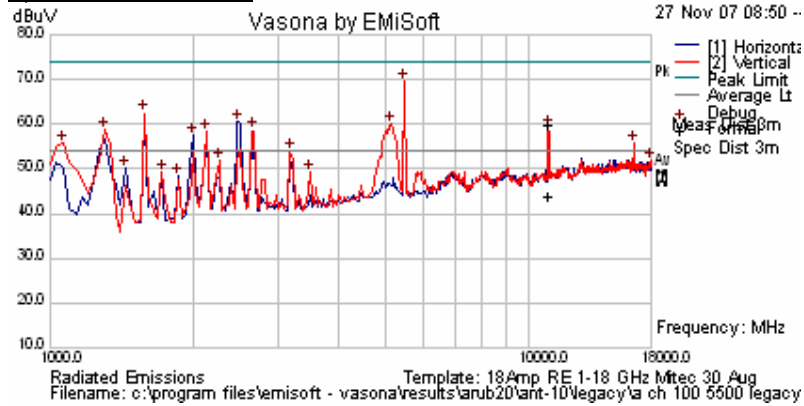

Peak Emission Scan

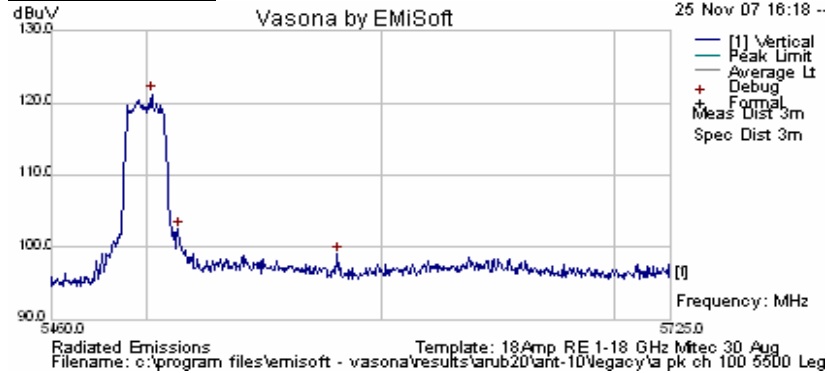


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5502.485	75.68	10.62	34.9	121.2	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
5460.000	ART Power Setting = 15.0				Peak Max				74	-3.92	Pass	Band-edge
5460.000	ART Power Setting = 15.0				Average Max				54	-7.11	Pass	Band-edge
10995.31	52.47	6.97	-1.53	57.91	Peak Max	V	103	293	74	-16.09	Pass	
10995.31	36.48	6.97	-1.53	41.92	Average Max	V	103	293	54	-12.08	Pass	
16535.07	47.92	8.8	-0.95	55.77	Peak [Scan]	H	100	0	68.23	-12.46	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 168 of 293

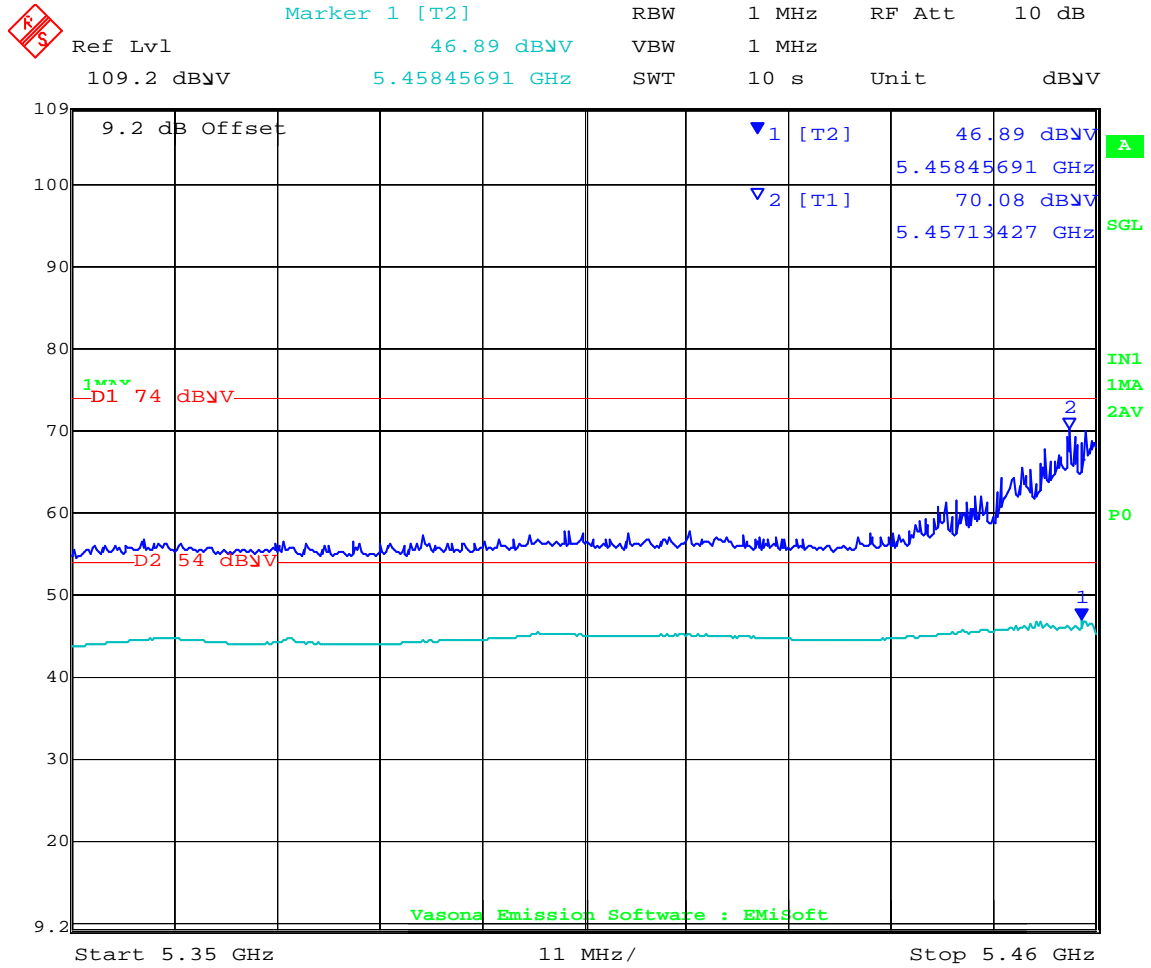

Date: 1.DEC.2007 16:07:30

802.11a Legacy Band-edge @ 5460 MHz with ANT-10

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 169 of 293


ARUB20 AP124 - ANT-10 (6dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MBit/s)	Compliant
120	5600	ART 17	99%	a 6 Legacy	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

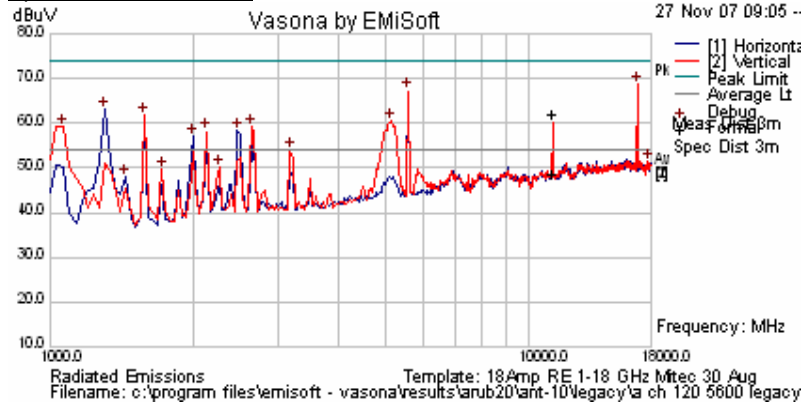

Peak Emission Scan

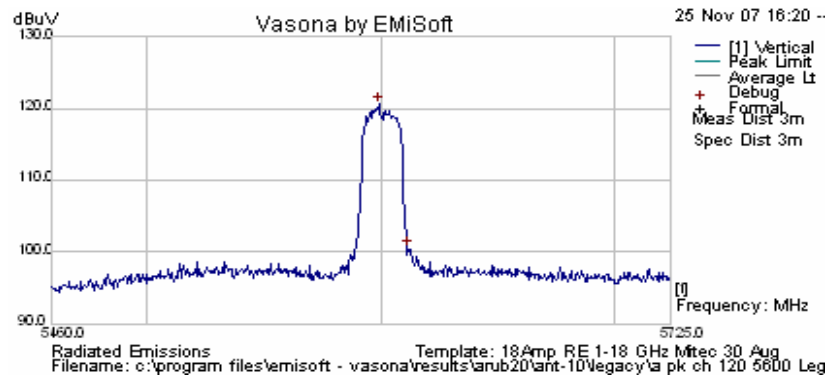

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5598.607	75.02	10.68	34.98	120.67	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
11204.3	55.14	6.9	-1.83	60.2	Peak Max	V	98	333	74	-13.8	Pass	
11204.3	41.69	6.9	-1.83	46.75	Average Max	V	98	333	54	-7.25	Pass	
16807.62	61.13	7.5	-0.99	67.64	Peak [Scan]	V	100	0	68.23	-0.59	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 170 of 293


ARUB20 AP124 - ANT-10 (6dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MBit/s)	Compliant
140	5700	ART 17	99%	a 6 Legacy	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

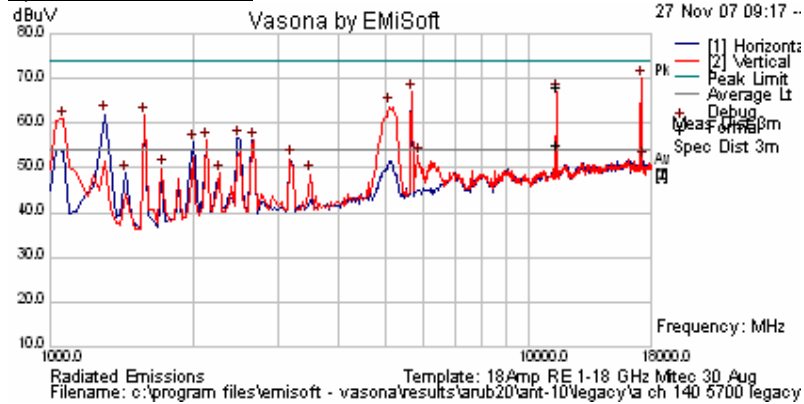

Peak Emission Scan

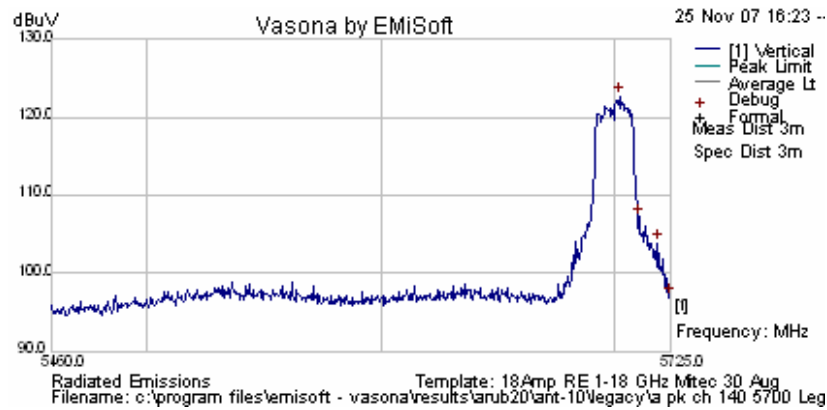

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5702.695	76.87	10.73	35.07	122.67	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
11402.93	60.88	6.82	-1.73	65.97	Peak Max	V	103	302	74	-8.03	Pass	
11402.93	47.95	6.82	-1.73	53.05	Average Max	H	105	310	54	-0.95	Pass	
17114.23	60.29	6.37	-0.74	65.92	Peak [Scan]	H	100	0	68.23	-2.31	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




AP124: 5150-5250GHz ANT-10 (6dBi) HT-20 Data Rates


ARUB20 AP124 - ANT-10 (6dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
36	5180	ART 17	99%	6.5 HT-20	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

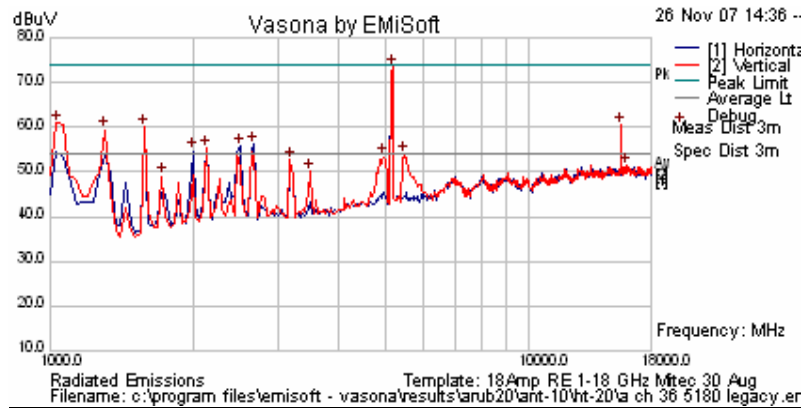

Peak Emission Scan

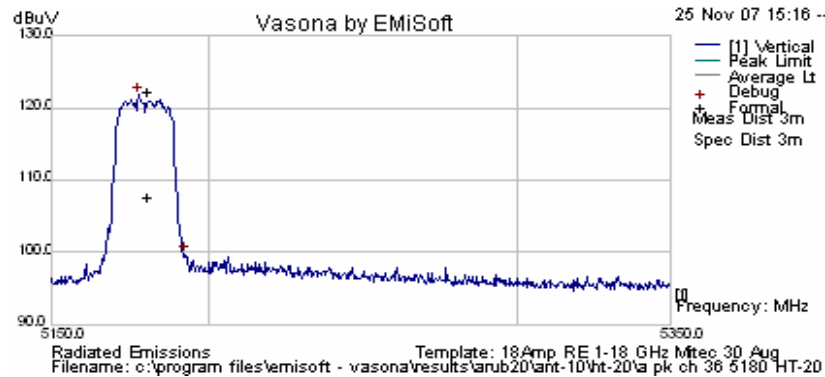


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Poi	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5178.056	76.55	10.62	34.65	121.82	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
5150.000	ART Power Setting = 13.0				Peak Max				74	-7.36	Pass	Band-edge
5150.000	ART Power Setting = 13.0				Average Max				54	-7.90	Pass	Band-edge
15595.94	34.51	8.37	-1.18	41.7	Average	V	98	283	54	-12.3	Pass	
15595.94	52.62	8.37	-1.18	59.81	Peak	V	98	283	74	-14.19	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 172 of 293

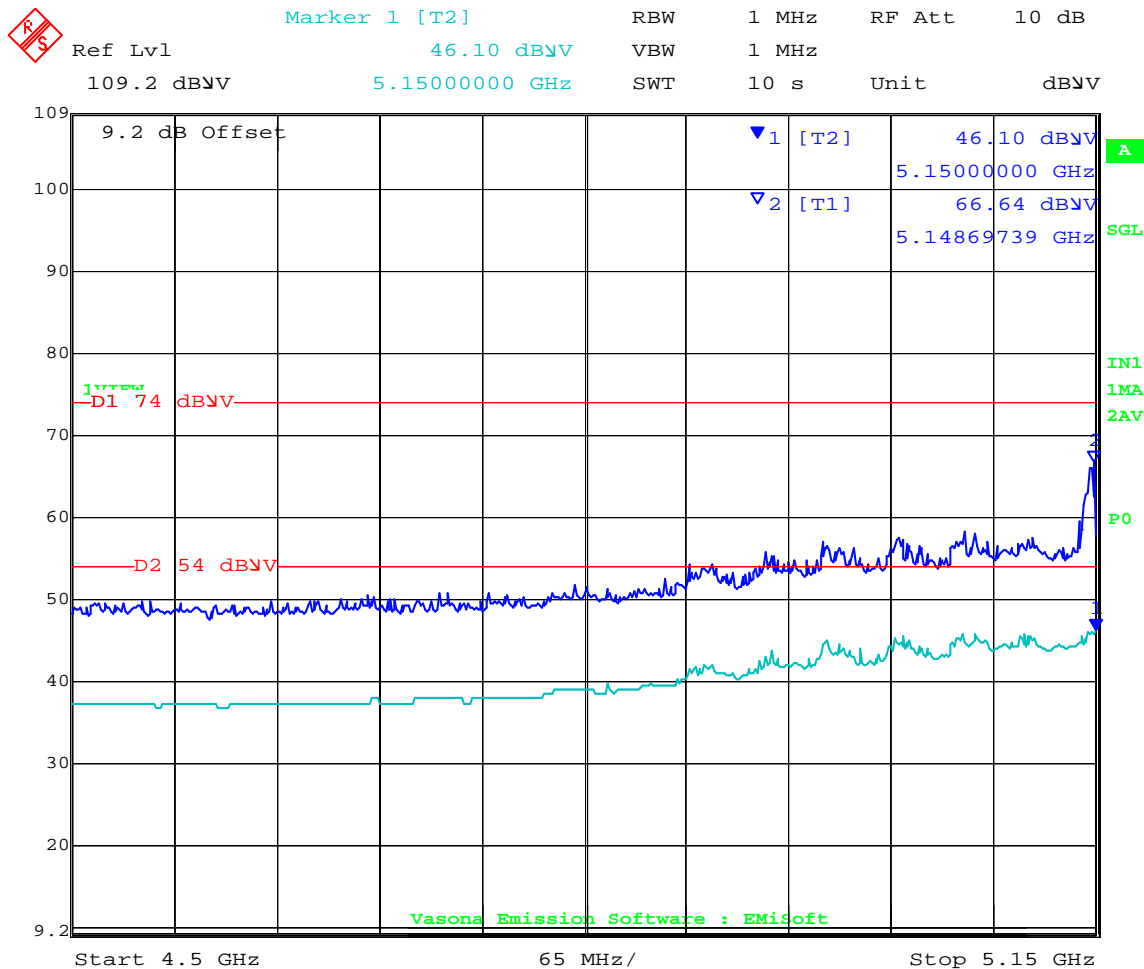

Date: 1.DEC.2007 16:24:54

HT-20 Band-edge @ 5150 MHz with ANT-10

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 173 of 293

ARUB20 AP124 - ANT-10 (6dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
40	5200	ART 17	99%	6.5 HT-20	Yes


Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

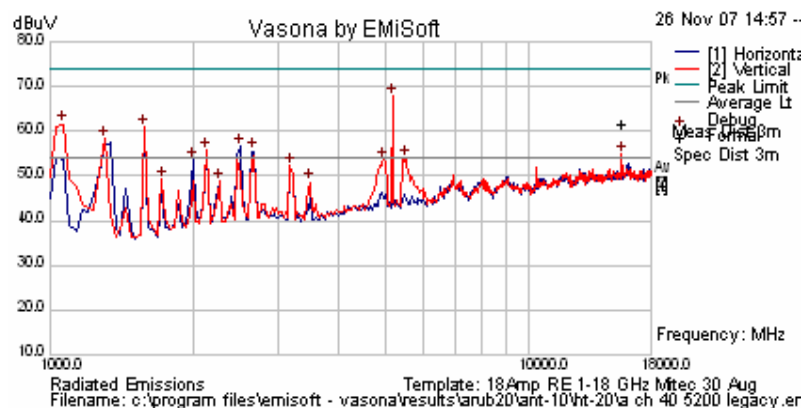

Spurious Emission Scan

Peak Emission Scan

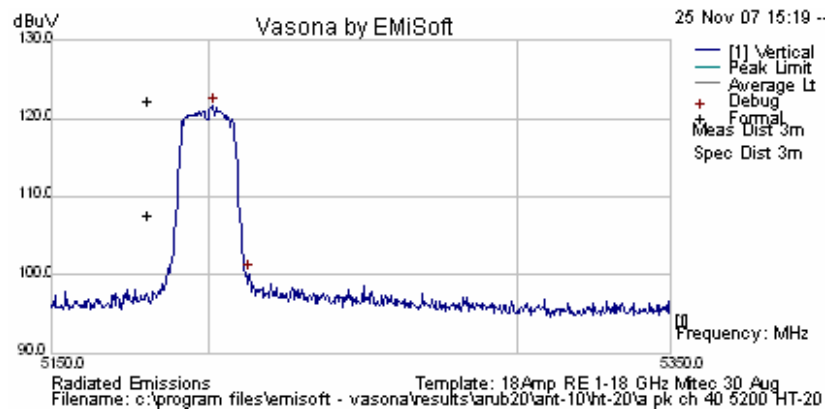

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5201.703	76.35	10.62	34.67	121.63	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
15595.94	34.51	8.37	-1.18	41.7	Average	V	98	283	54	-12.3	Pass	
15595.94	52.62	8.37	-1.18	59.81	Peak	V	98	283	74	-14.19	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 174 of 293


ARUB20 AP124 - ANT-10 (6dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
48	5240	ART 17	99%	6.5 HT-20	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

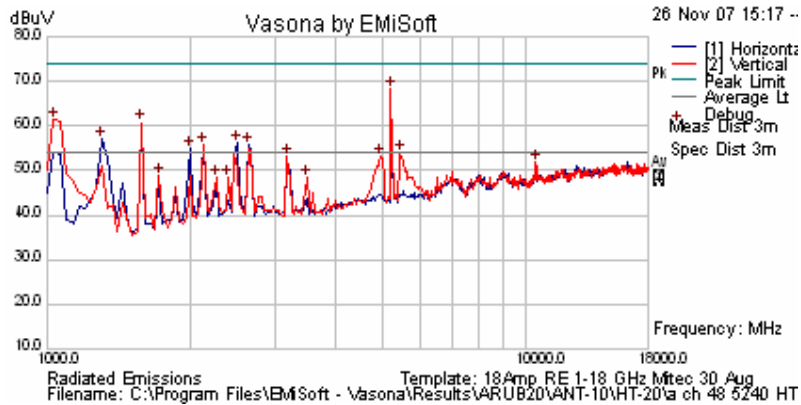

Peak Emission Scan

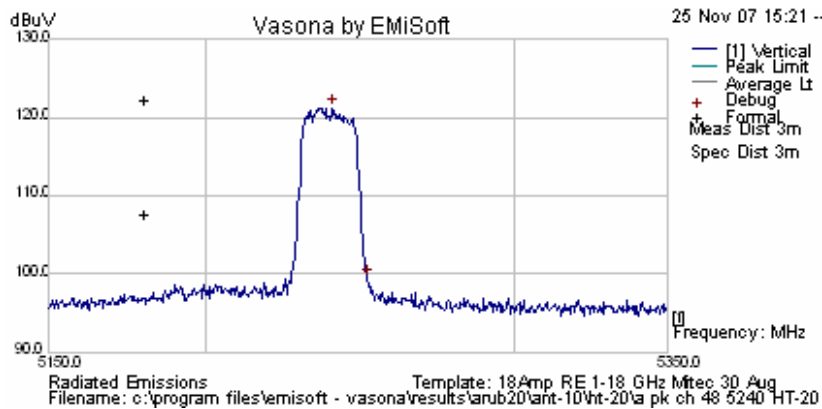

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5240.982	75.89	10.62	34.7	121.21	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 175 of 293

AP124: 5250-5350GHz ANT-10 (6dBi) HT-20 Data Rates


ARUB20 AP124 - ANT-10 (6dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
52	5260	ART 17	99%	6.5 HT-20	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

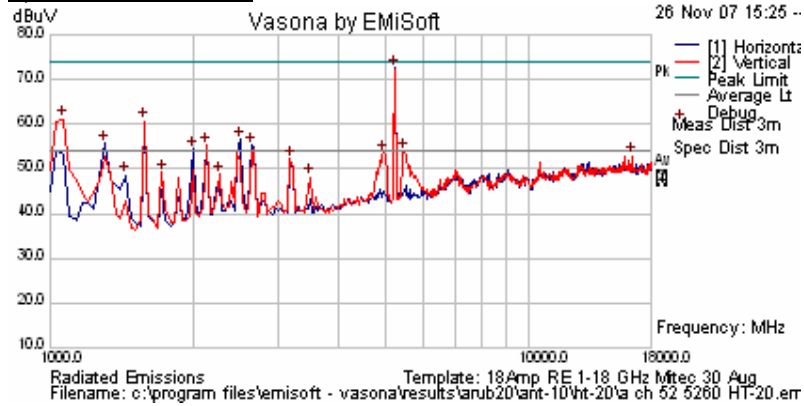

Peak Emission Scan

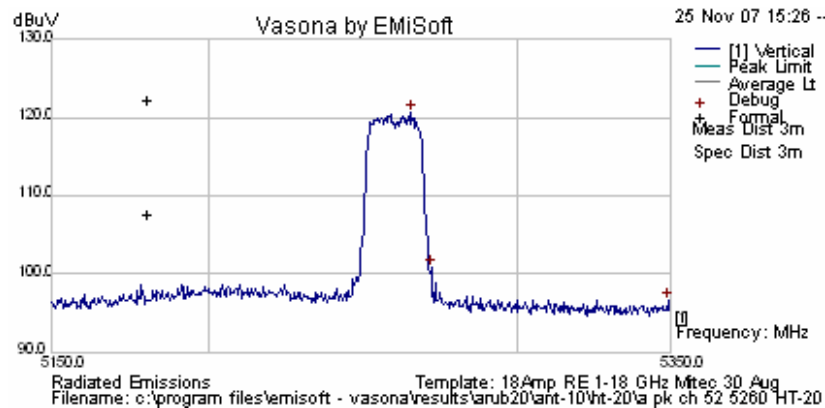

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5265.431	75.28	10.62	34.72	120.61	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 176 of 293


ARUB20 AP124 - ANT-10 (6dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
60	5300	ART 17	99%	6.5 HT-20	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

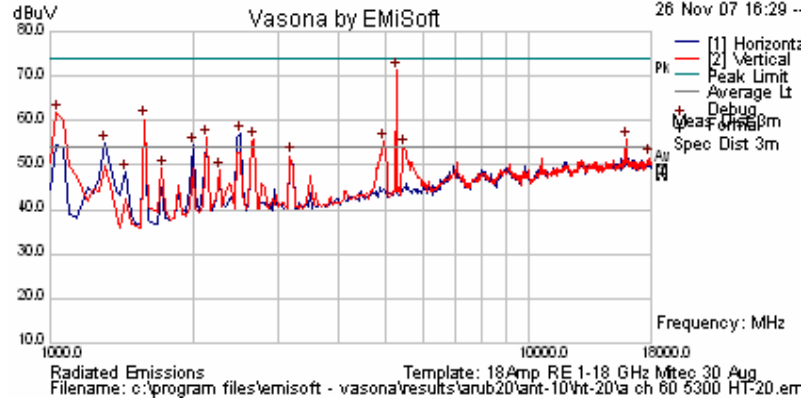

Peak Emission Scan

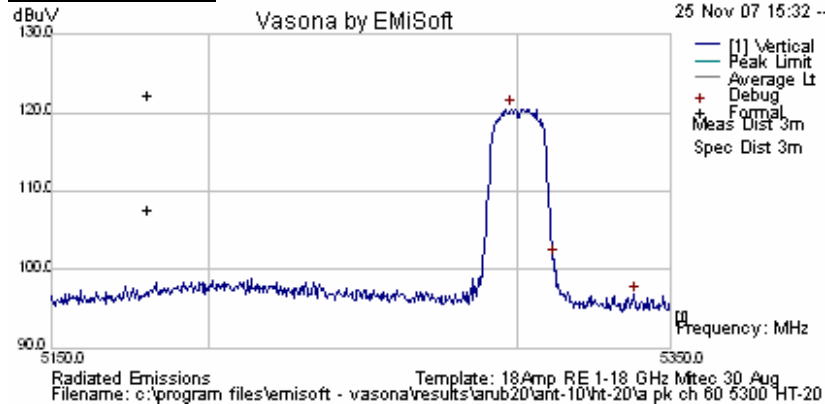

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5297.896	75.14	10.62	34.74	120.5	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
15901.95	48.73	8.86	-1.02	56.57	Peak	V	98	332	74	-17.43	Pass	
15901.95	33.54	8.86	-1.02	41.38	Average	V	98	332	54	-12.62	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 177 of 293


ARUB20 AP124 - ANT-10 (6dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
64	5320	ART 17	99%	6.5 HT-20	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

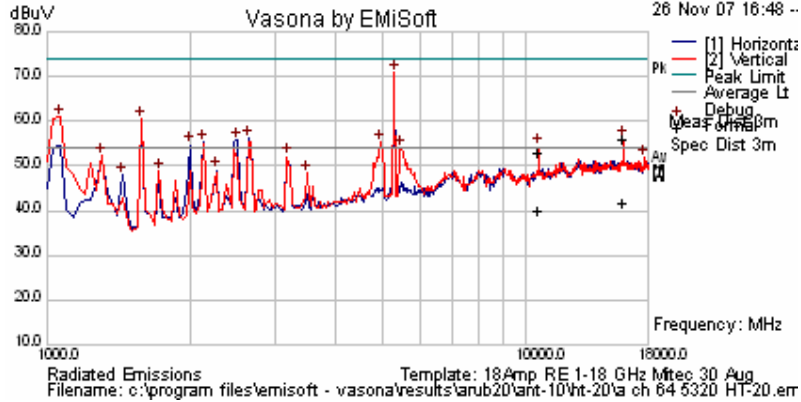

Peak Emission Scan

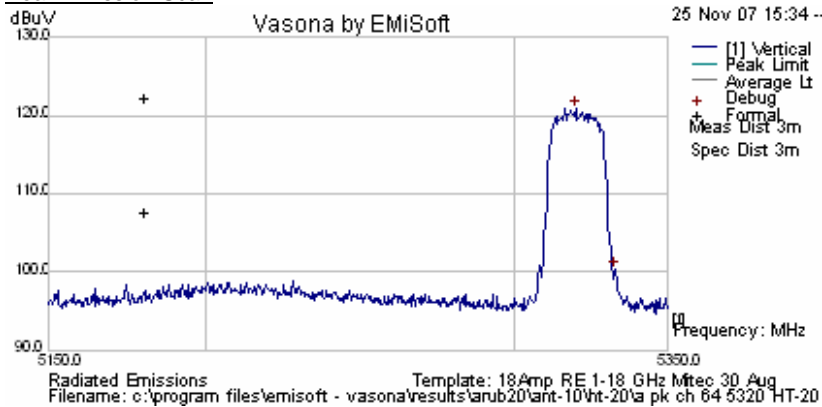

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5319.94	75.41	10.62	34.76	120.79	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
5350	ART power Setting = 14.0				Peak Max	V			74	-0.34	Pass	Band-edge
5350	ART power Setting = 14.0				Average Max	V			54	-5.56	Pass	Band-edge
15961.72	45.92	8.96	-1.01	53.88	Peak Max	V	101	286	74	-20.12	Pass	
10641.28	45.25	6.83	-1.18	50.9	Peak Max	V	117	317	74	-23.1	Pass	
15961.72	31.78	8.96	-1.01	39.73	Average Max	V	101	286	54	-14.27	Pass	
10641.28	32.16	6.83	-1.18	37.82	Average Max	V	117	317	54	-16.18	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 178 of 293



Date: 1.DEC.2007 16:35:45

HT-20 Band-edge @ 5350 MHz with ANT-10

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 179 of 293

AP124 - ANT-10 (6dBi) HT-20 Data Rates


ARUB20 AP124 - ANT-10 (6dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MBit/s)	Compliant
100	5500	ART 17	99%	6.5 HT-20	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

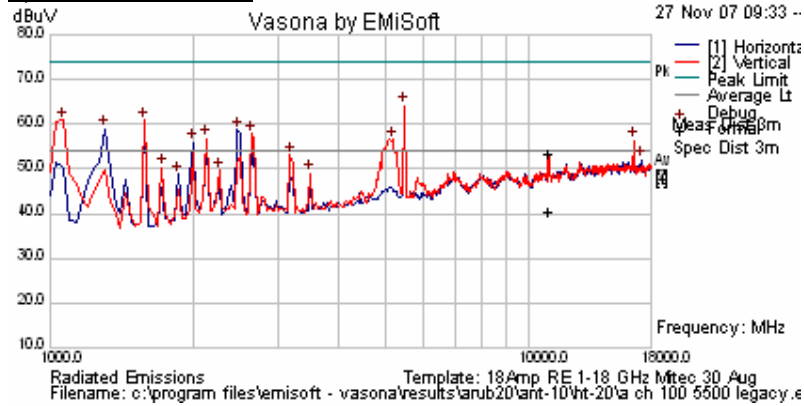

Peak Emission Scan

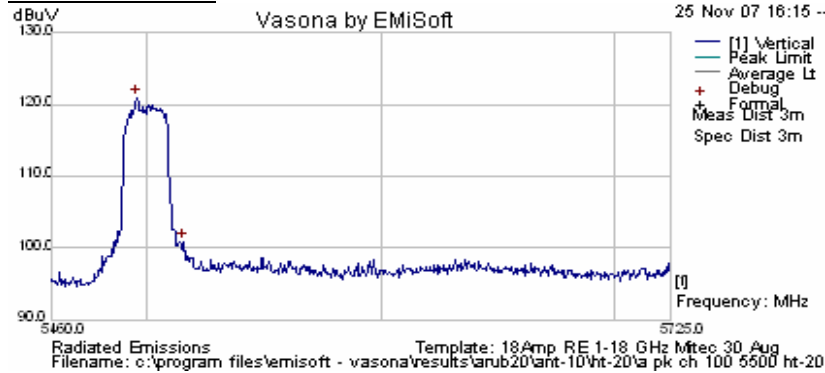


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5496.112	75.44	10.62	34.9	120.96	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
5460.000	ART Power Setting = 15.0				Peak Max	V			74	-1.87	Pass	Band-edge
5460.000	ART Power Setting = 15.0				Average Max	V			54	-6.92	Pass	Band-edge
11001.8	45.92	6.97	-1.54	51.35	Peak Max	V	98	55	74	-22.65	Pass	
11001.8	32.87	6.97	-1.54	38.3	Average Max	V	98	55	54	-15.7	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 180 of 293

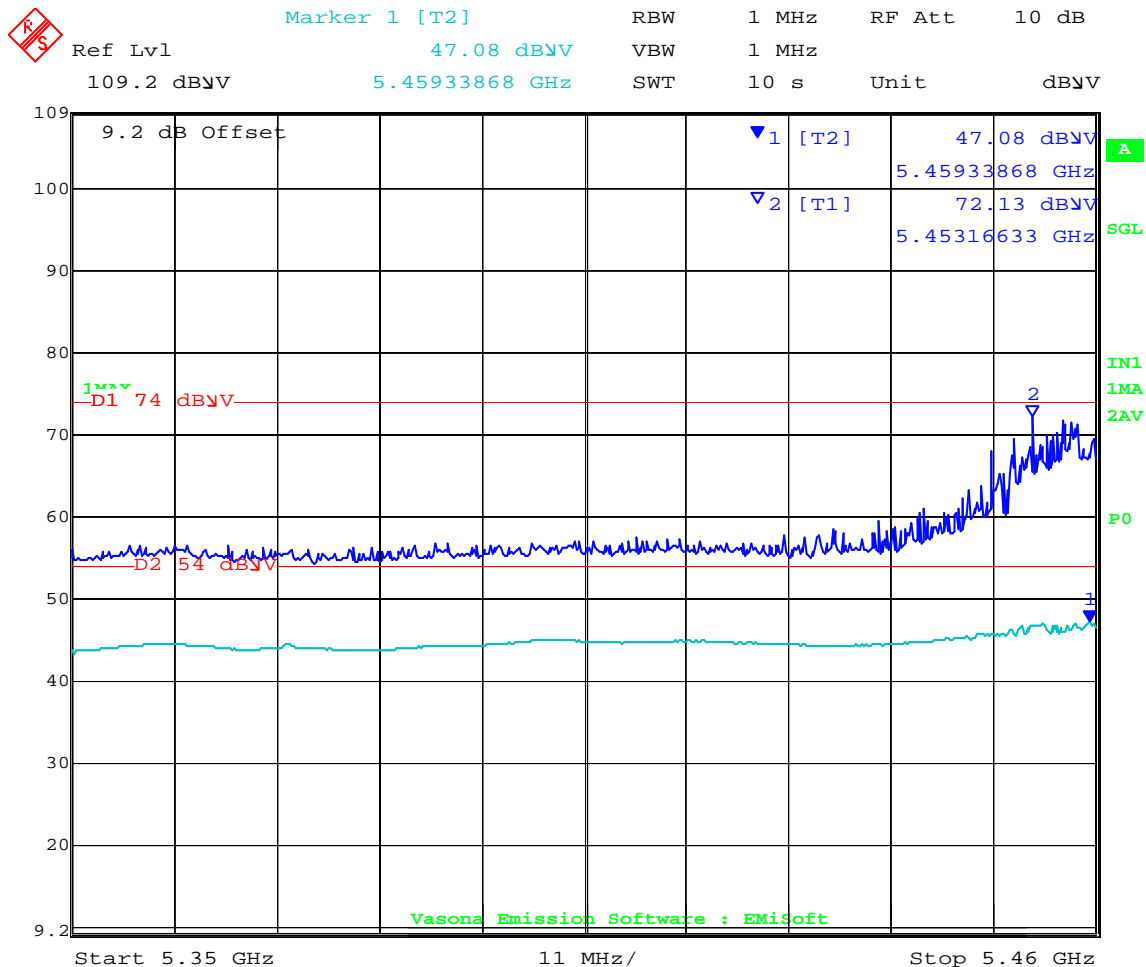

Date: 1.DEC.2007 16:09:14

HT-20 Band-edge @ 5460 MHz with ANT-10

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 181 of 293


ARUB20 AP124 - ANT-10 (6dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MBit/s)	Compliant
120	5600	ART 17	99%	6.5 HT-20	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

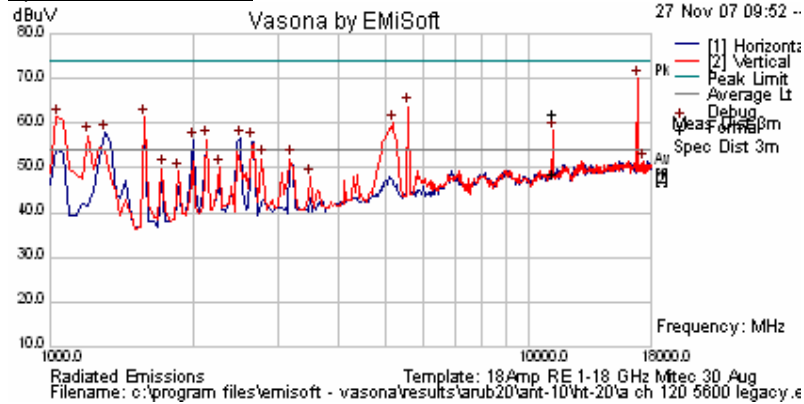

Peak Emission Scan

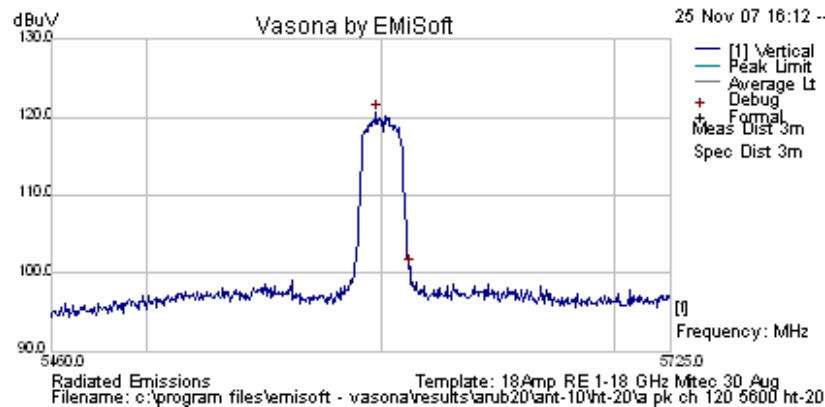

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5597.545	74.88	10.67	34.98	120.53	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
11204.24	55.14	6.9	-1.83	60.2	Peak Max	V	115	56	74	-13.80	Pass	
11204.24	41.36	6.9	-1.83	46.42	Average Max	V	115	56	54	-7.58	Pass	
16807.62	61.02	7.2	-0.99	67.23	Peak [Scan]	H	100	0	68.23	-1.00	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 182 of 293


ARUB20 AP124 - ANT-10 (6dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MBit/s)	Compliant
140	5700	ART 14	99%	6.5 HT-20	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

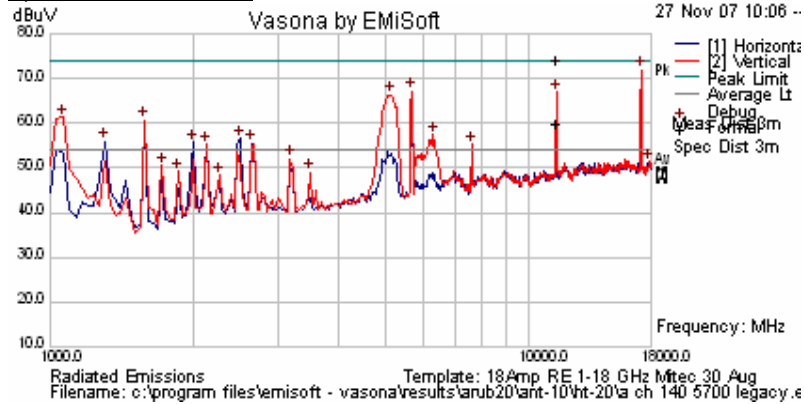

Peak Emission Scan

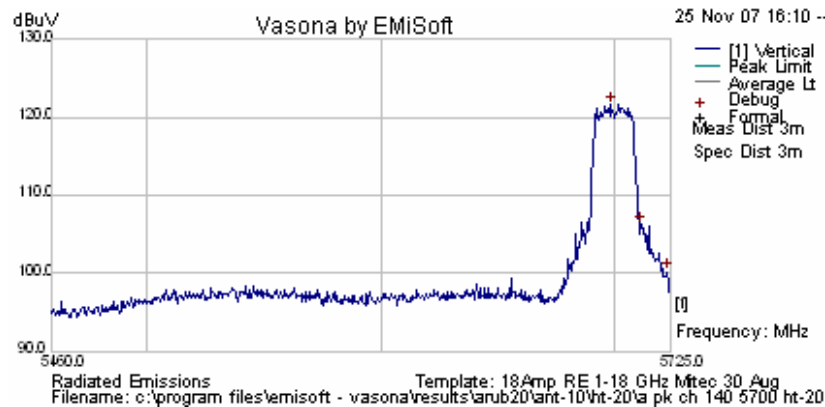

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5698.978	75.8	10.73	35.06	121.59	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
11401.16	60.84	6.82	-1.73	65.93	Peak Max	V	106	299	74	-6.07	Pass	
11401.16	46.83	6.82	-1.73	51.92	Average Max	V	106	299	54	-2.08	Pass	
17114.23	62.2	6.37	-0.74	67.83	Peak [Scan]	H	100	0	68.23	-0.40	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 183 of 293


AP124: 5150-5250GHz ANT-10 (6dBi) HT-40 Data Rates

ARUB20 AP124 - ANT-10 (6dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
	5190	ART 17	99%	13.5 HT-40	Yes


Three antennas operating simultaneously

NRB = None Restrictive Band

Spurious Emission Scan

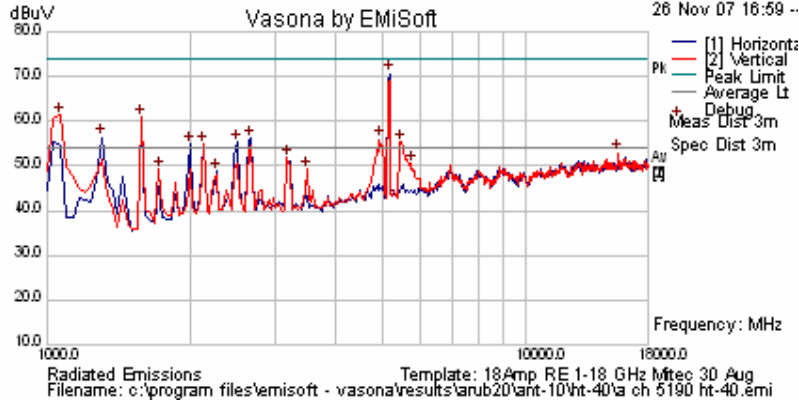

Peak Emission Scan

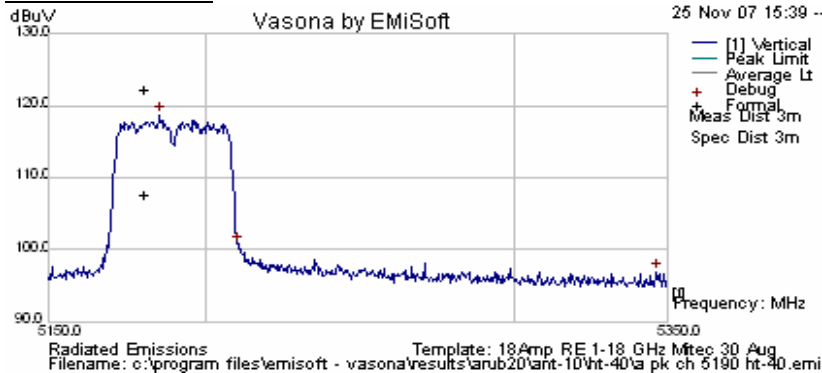


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5185.671	73.51	10.62	34.65	118.78	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
5150.000	ART Power Setting = 10.0				Peak Max	V			74	-1.21	Pass	Band-edge
5150.000	ART Power Setting = 10.0				Average Max	V			54	-0.45	Pass	Band-edge

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 184 of 293

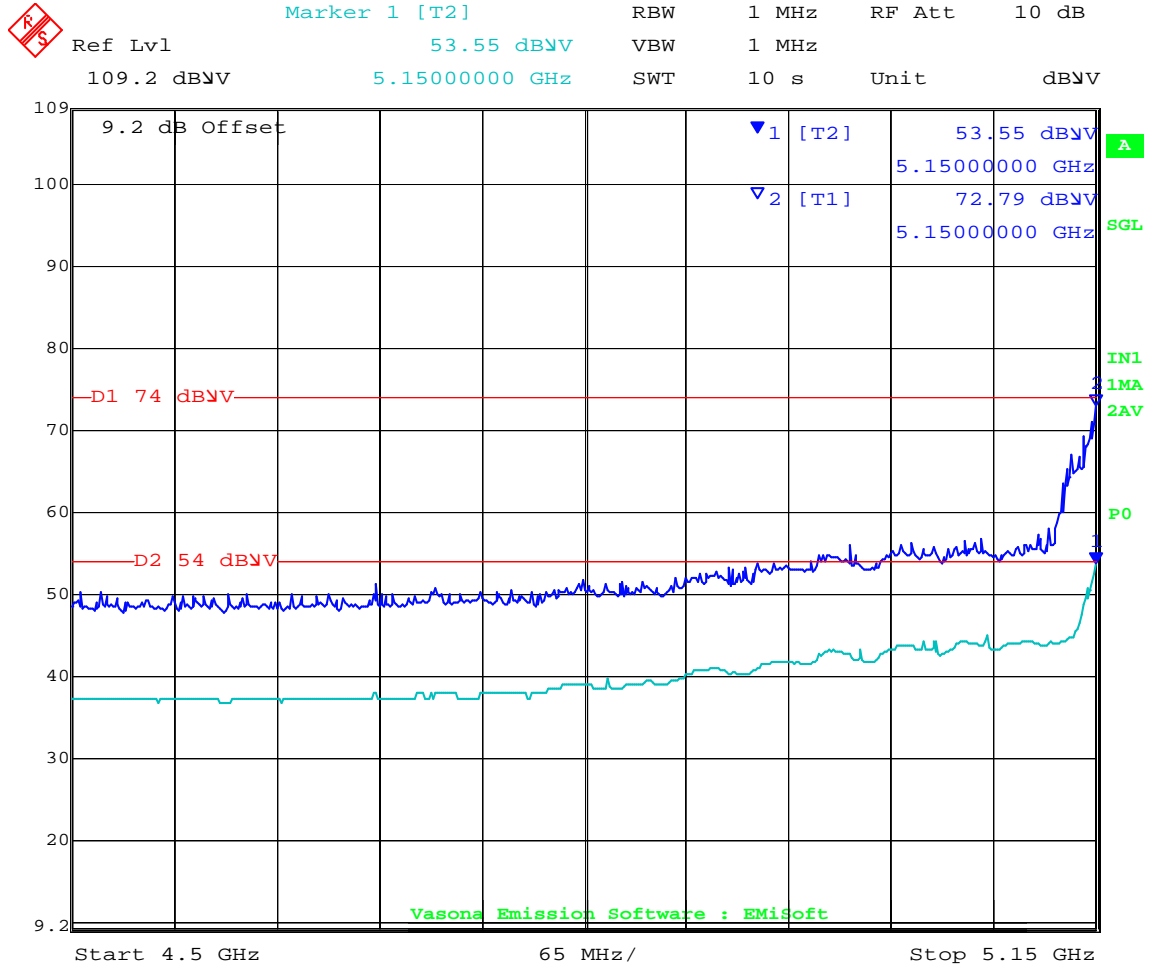

Date: 1.DEC.2007 16:27:26

HT- 40 Band-edge @ 5150 MHz with ANT-10

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 185 of 293


ARUB20 AP124 - ANT-10 (6dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
	5230	ART 17	99%	13.5 HT-40	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

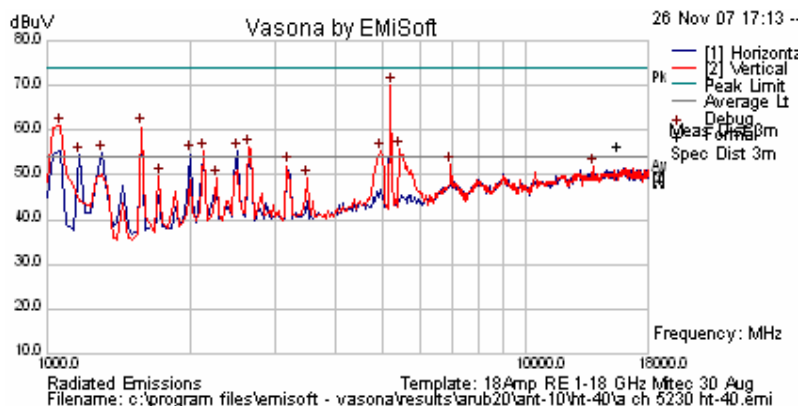

Peak Emission Scan

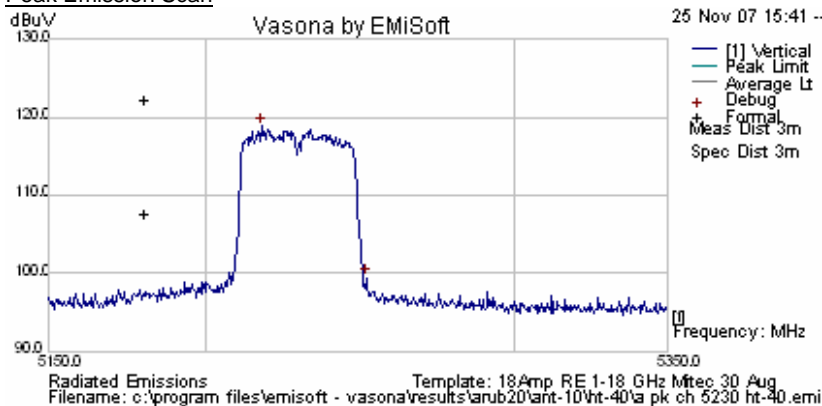

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5218.136	73.52	10.62	34.68	118.82	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 186 of 293


ARUB20 AP124 - ANT-10 (6dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
	5270	ART 17	99%	13.5 HT-40	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

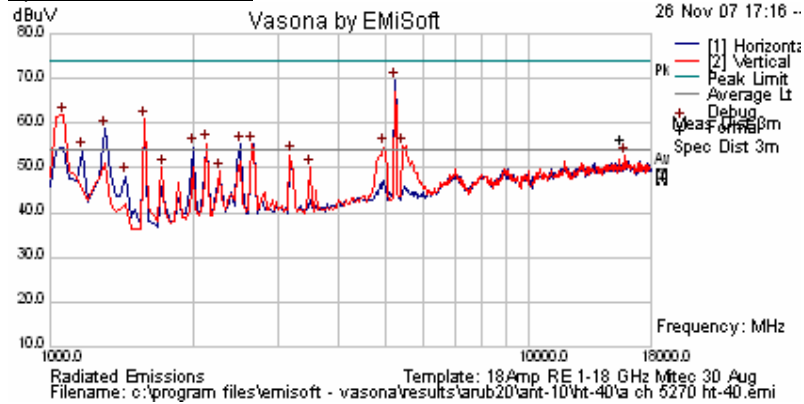

Peak Emission Scan

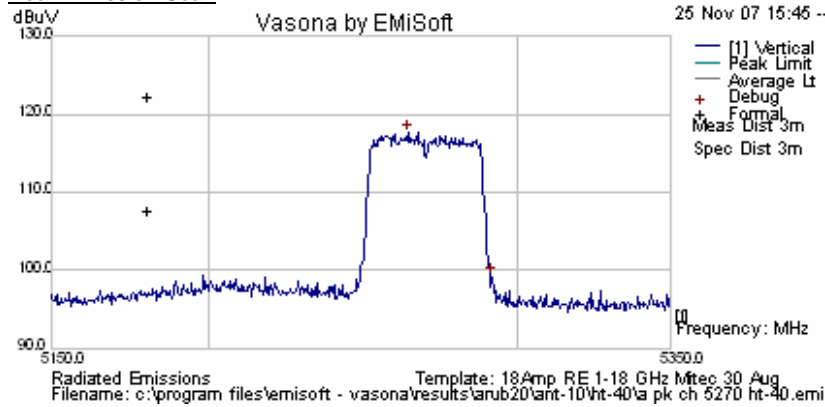

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5264.228	72.32	10.62	34.72	117.65	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 187 of 293


ARUB20 AP124 - ANT-10 (6dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
	5310	ART 17	99%	13.5 HT-40	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

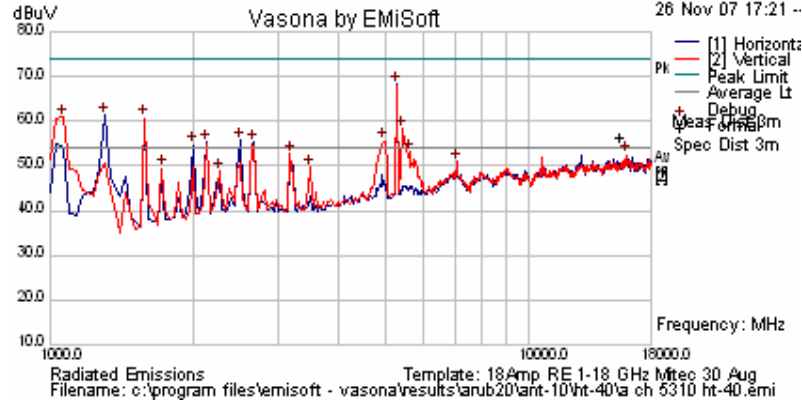

Peak Emission Scan

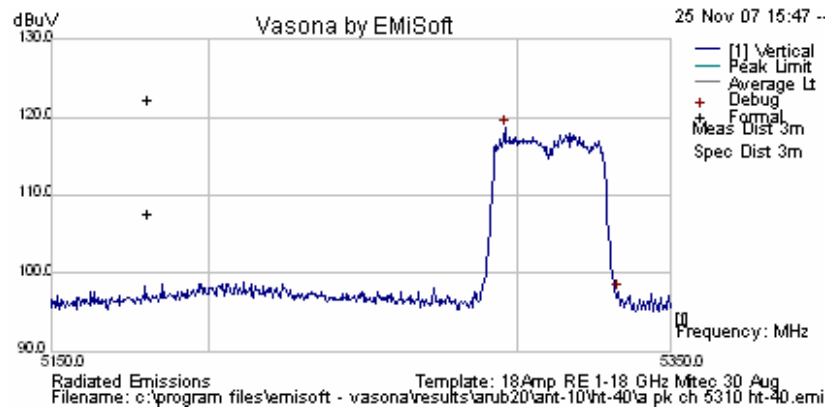


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5295.892	73.2	10.62	34.74	118.56	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
5350.000	ART power Setting = 11.5				Peak Max	V			74	-3.82	Pass	Band-edge
5350.000	ART power Setting = 11.5				Average Max	V			54	-1.48	Pass	Band-edge

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 188 of 293

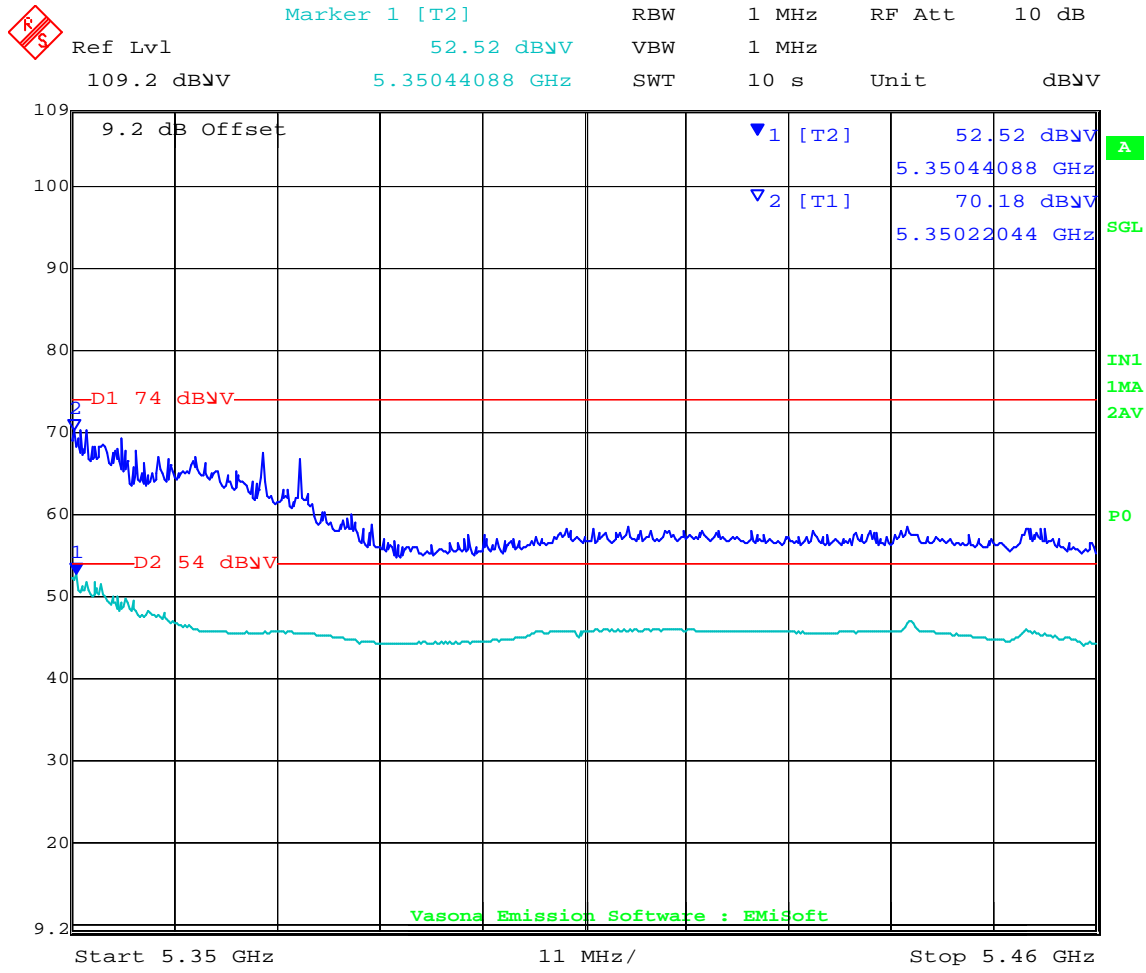

Date: 1.DEC.2007 16:33:32

HT- 40 Band-edge @ 5350 MHz with ANT-10

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 189 of 293

AP124: 5470-5725 MHz ANT-10 (6dBi) HT-40 Data Rates


ARUB20 AP124 - ANT-10 (6dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
	5510	ART 17	99%	13.5 HT-40	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

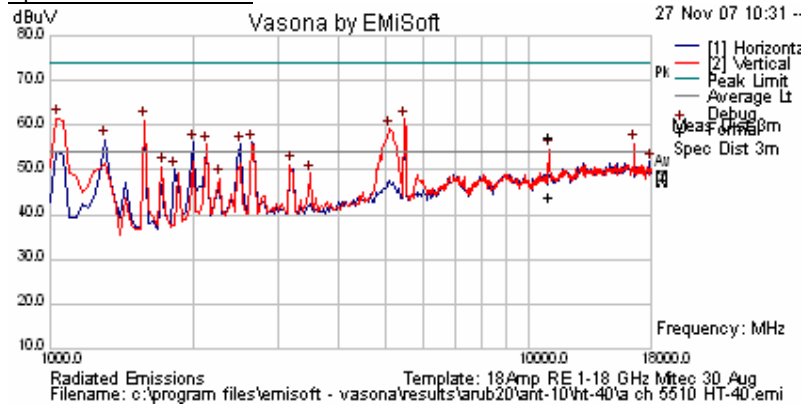

Peak Emission Scan

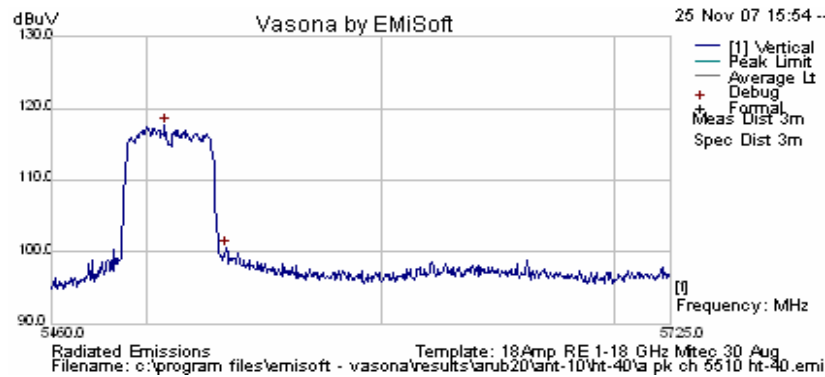


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5507.796	72.05	10.62	34.91	117.58	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
5460.000	ART power Setting = 13.0				Peak Max	V			74	-1.09	Pass	Band-edge
5460.000	ART power Setting = 13.0				Average Max	V			54	-3.84	pass	Band-edge
11027.94	49.84	6.96	-1.6	55.19	Peak Max	V	104	45	74	-18.81	Pass	
11027.94	36.27	6.96	-1.6	41.63	Average Max	V	104	45	54	-12.37	Pass	
16535.07	48.12	8.8	-0.95	55.97	Peak [Scan]	H	100	0	68.23	-12.26	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 190 of 293

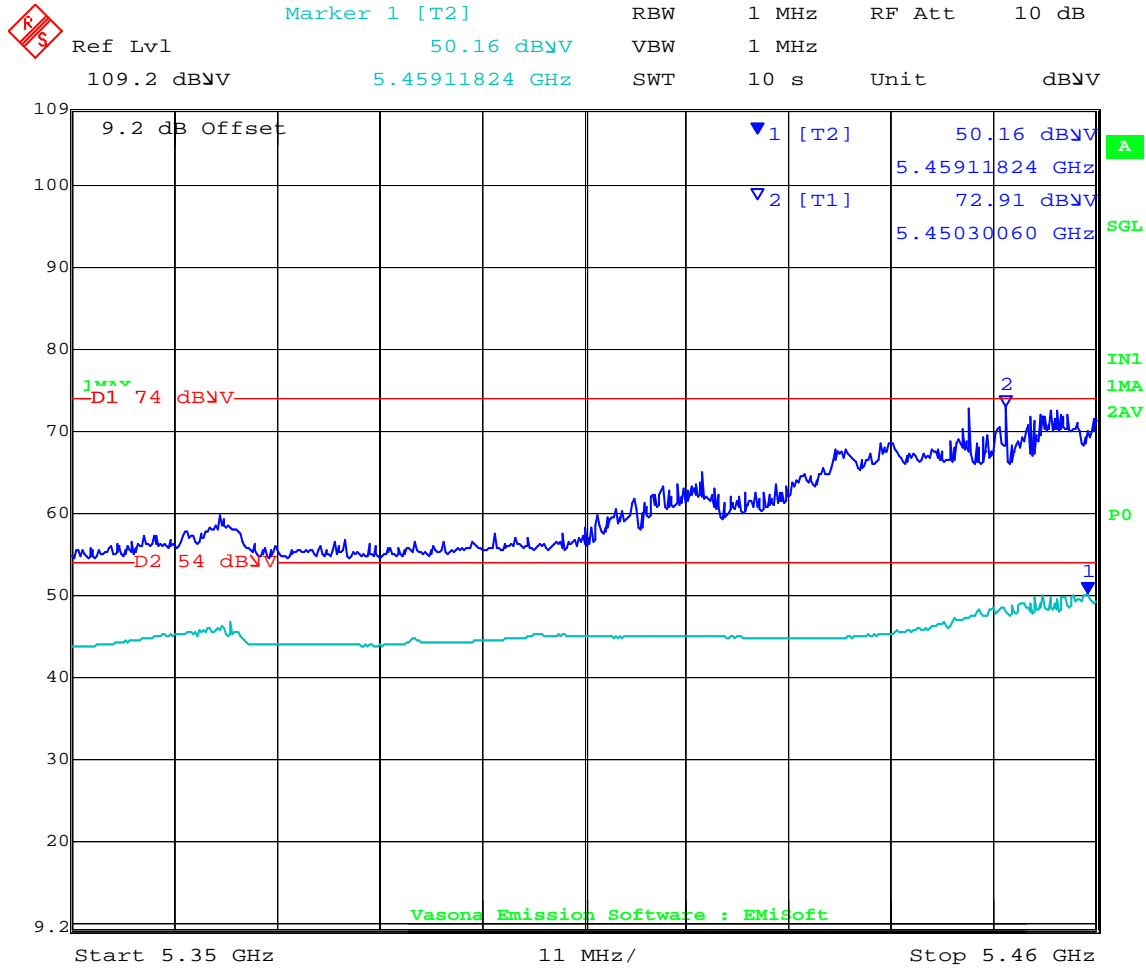

Date: 1.DEC.2007 16:12:53

HT-40 Band-edge @ 5460 MHz with ANT-10

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 191 of 293


ARUB20 AP124 - ANT-10 (6dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
	5620	ART 17	99%	13.5 HT-40	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

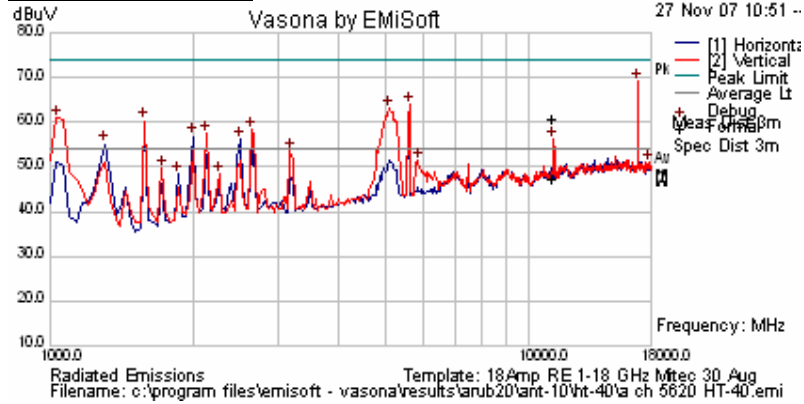

Peak Emission Scan

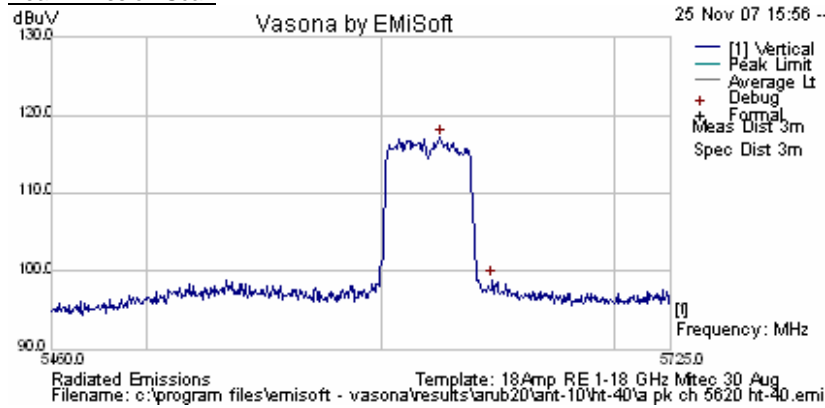

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5625.16	71.53	10.69	35	117.22	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
11240.84	53.83	6.88	-1.83	58.89	Peak Max	V	102	56	74	-15.11	Pass	
11240.84	40.35	6.88	-1.83	45.41	Average Max	V	102	56	54	-8.59	Pass	
16875.75	60.3	7.16	-0.97	66.49	Peak [Scan]	H	100	0	68.23	-1.74	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 192 of 293


ARUB20 AP124 - ANT-10 (6dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
	5690	ART 16*	99%	13.5 HT-40	Yes

Three antennas operating simultaneously


NRB = None Restrictive Band

*Reduction in output power required to bring into compliance

Spurious Emission Scan

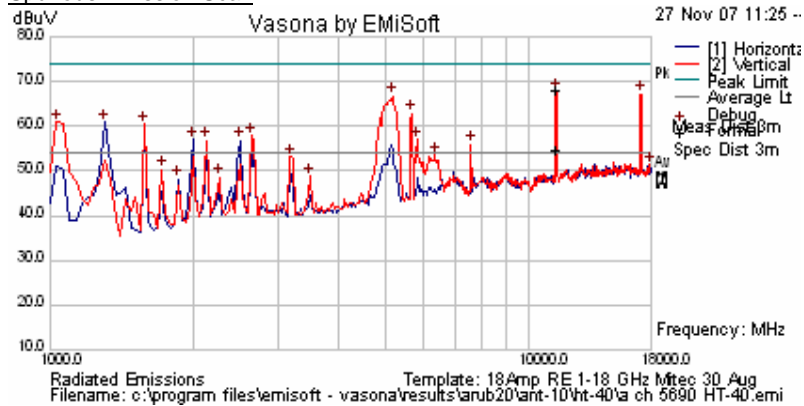

Peak Emission Scan

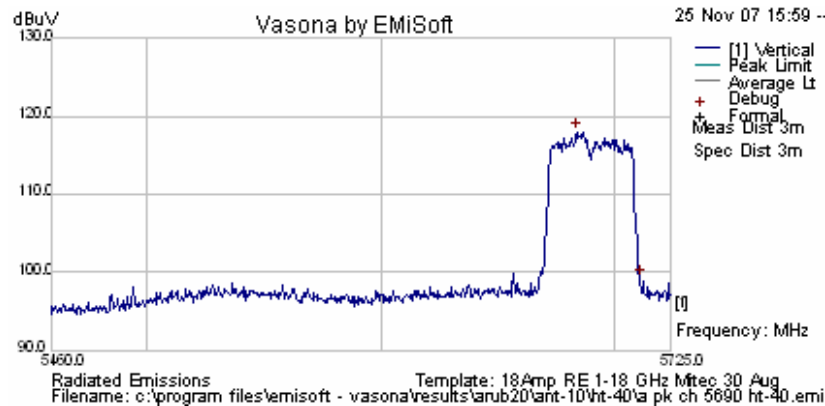

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5684.108	72.24	10.72	35.05	118.01	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
11387.86	60.88	6.83	-1.75	65.96	Peak Max	V	122	35	74	-8.04	Pass	
11387.86	47.78	6.83	-1.75	52.86	Average Max	V	122	35	54	-1.14	Pass	
17114.23	59.47	6.37	-0.74	65.1	Peak [Scan]	H	100	0	68.23	-3.13	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 193 of 293

ARUB20 AP-125 (ANT-12)
ART Settings V Aggregate Measured Power

The following matrix identifies the ART power setting V's each output chain. The aggregate power was also measured for all three chains.

As a result of either spurious emissions (harmonic) or band-edge issues the power was reduced to bring the unit into compliance.

Configuration	ART Power Setting	Tx 1 Measured Pwr (dBm)	Tx 2 Measured Pwr (dBm)	Tx 3 Measured Pwr (dBm)	Aggregate Measured Pwr (dBm)
Legacy a (5150 5180 MHz)BE	13	10.93	10.82	11.52	16.40
Legacy a (5350 5320 MHz)BE	14	11.57	12.00	11.18	17.02
Legacy a (5460 5150 5745 MHz)BE	13	10.21	9.96	10.89	15.91
Legacy a (5460 5500 MHz)BE	14	12.16	11.86	12.06	17.73
HT-20					
HT-20 (5150 5180 MHz)BE	13	10.83	11.72	11.47	15.51
HT-20 (5350 5320 MHz)BE	14	11.62	11.77	11.10	16.89
HT-20 (5460 5150 5745 MHz)BE	12.5	9.83	9.13	10.37	15.38
HT-20 (5460 5500 MHz)BE	14	12.09	11.92	11.92	17.60
HT-40					
HT-40 (5150 5190 MHz)BE	7	4.55	4.66	5.96	10.2
HT-40 (5350 5310 MHz)BE	10	7.42	7.90	7.32	12.96
HT-40 (5150 5190 5755 MHz)BE	10	7.06	6.53	7.73	12.70
HT-40 (5460 5510 MHz)BE	11	8.80	9.07	7.80	14.14

Note BE = Band-edge, SE – Spurious emissions

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




AP124: 5150-5250GHz ANT-12 (14dBi) Legacy Data Rates


ARUB20 AP124 - ANT-12 (14dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MBit/s)	Compliant
36	5180	ART 17	99%	a 6 Legacy	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

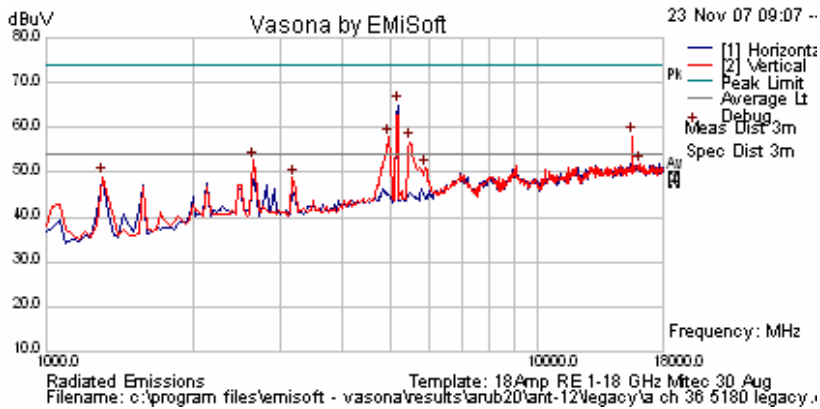

Peak Emission Scan

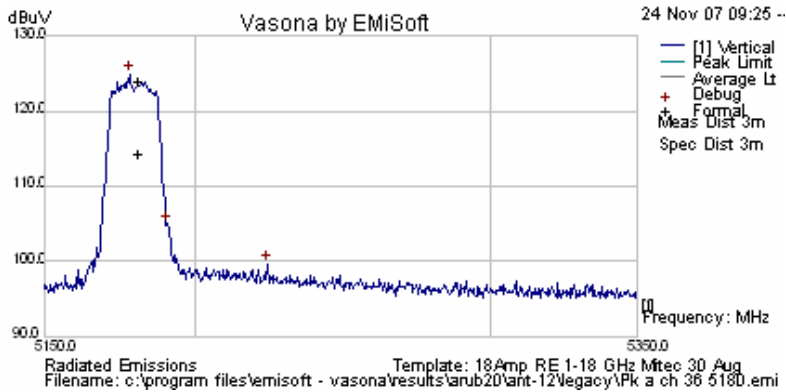


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5178.457	79.66	10.62	34.65	124.93	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
5150.000	ART Power Setting = 13.0				Peak Max	V			74	-1.25	Pass	Band-edge
5150.000	ART Power Setting = 13.0				Average Max	V			54	-1.78	Pass	Band-edge
15542.021	57.7	6.97	-1.55	63.11	Peak Max	V	125	59	74	-10.89	Pass	
15542.021	66.19	2.24	-15.63	52.79	Average Max	V	102	340	54	-21.21	Pass	
1317.765	66.19	2.24	-15.63	52.79	Peak Max	V	102	340	74	-21.21	Pass	
1317.765	35.92	2.24	-15.63	22.52	Average Max	H	100	27	54	-31.48	Pass	
2635.271	60.91	3.11	-11.37	52.65	Peak [Scan]	V	100	0	68.23	-15.58	Pass	
16092.184	43.77	8.98	-0.93	51.83	Peak [Scan]	V	100	0	68.23	-16.40	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 195 of 293

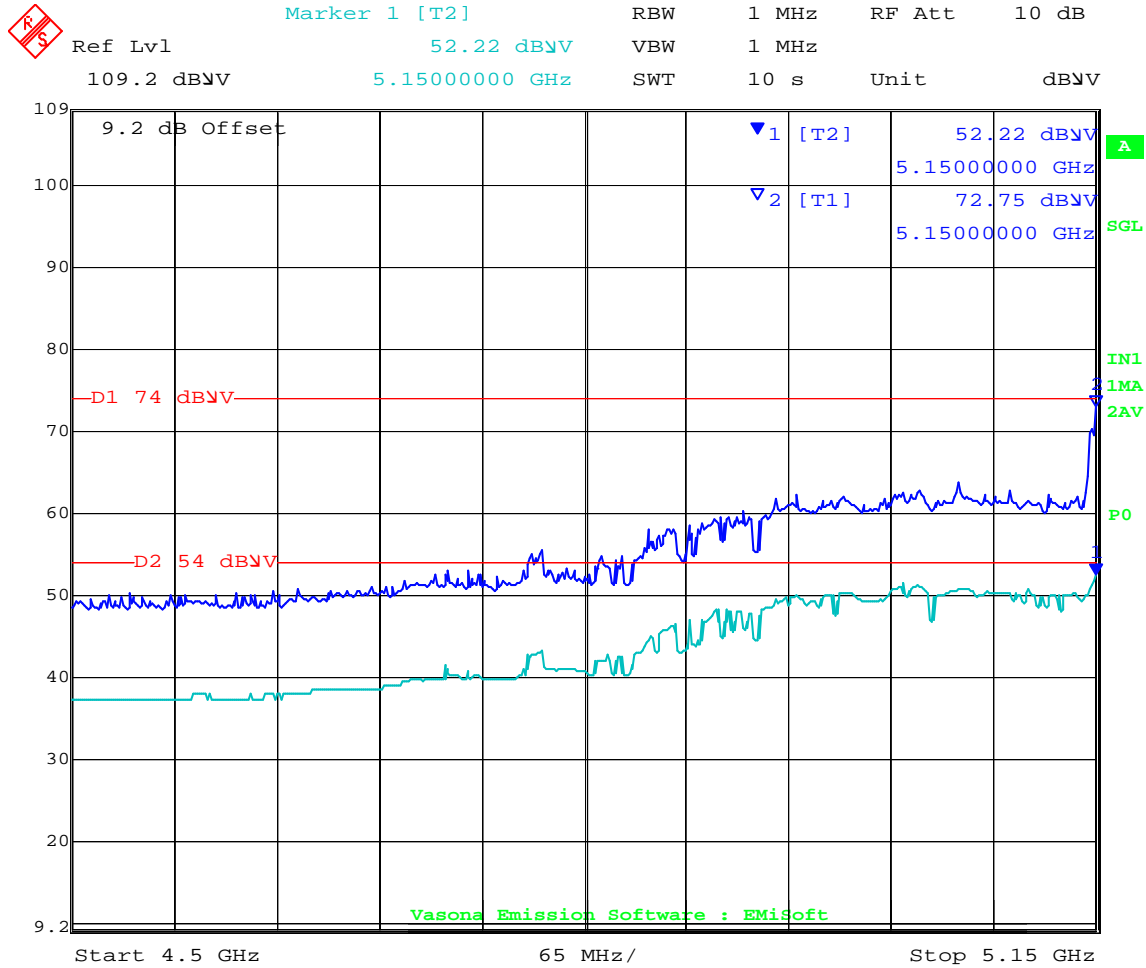

Date: 1.DEC.2007 17:19:11

802.11a Legacy Band-edge @ 5150 MHz with ANT-12

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 196 of 293

ARUB20 AP124 - ANT-12 (14dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MBit/s)	Compliant
40	5200	ART 17	99%	a 6 Legacy	Yes


Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

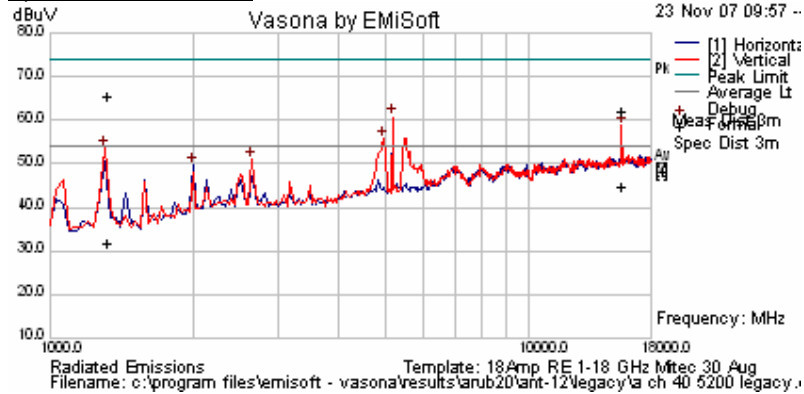

Spurious Emission Scan

Peak Emission Scan

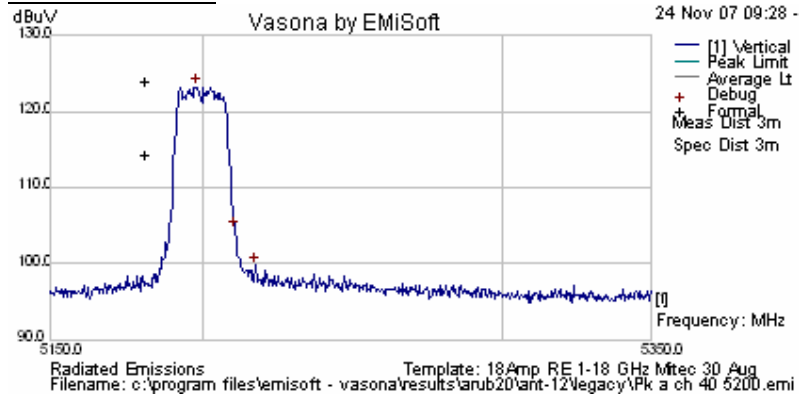

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5198.096	77.94	10.62	34.66	123.22	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
15598.476	52.95	8.37	-1.17	60.14	Peak Max	V	110	298	74	-13.86	Pass	
15598.476	35.43	8.37	-1.17	42.63	Average Max	V	110	298	54	-11.37	Pass	
1329.859	76.95	2.25	-15.58	63.61	Peak Max	V	101	284	74	-10.39	Pass	
1329.859	42.96	2.25	-15.58	29.62	Average Max	V	101	284	54	-24.38	Pass	
2635.271	59.25	3.11	-11.37	50.99	Peak [Scan]	V	100	0	68.23	-17.24	Pass	
1987.976	58.24	2.74	-11.26	49.72	Peak [Scan]	H	100	0	68.23	-18.51	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 197 of 293


ARUB20 AP124 - ANT-12 (14dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MBit/s)	Compliant
48	5240	ART 17	99%	a 6 Legacy	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

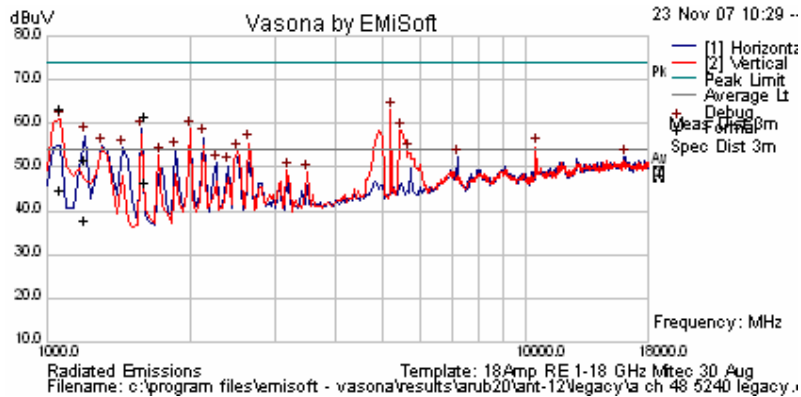

Peak Emission Scan

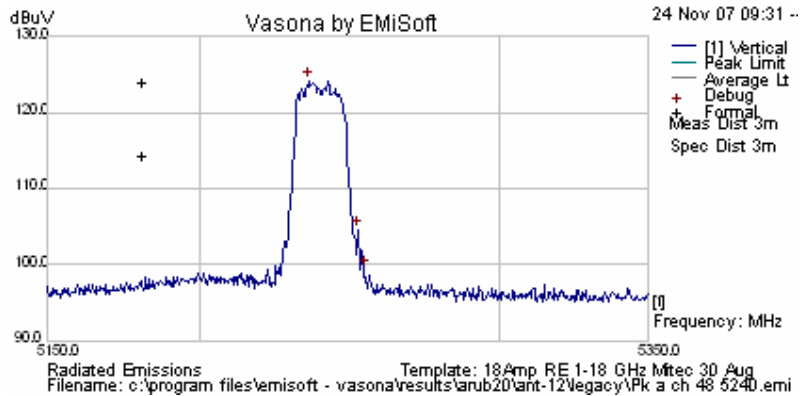

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5236.172	78.85	10.62	34.69	124.16	Peak [Scan]	V	100	0	N/A	N/A	Fail	Fundamental
1070.561	75.6	2.02	-16.09	61.53	Peak Max	V	100	18	74	-12.47	Pass	
1070.561	56.62	2.02	-16.09	42.55	Average Max	V	100	18	54	-11.45	Pass	
1603.206	71.38	2.46	-14.28	59.55	Peak Max	V	108	180	74	-14.45	Pass	
1603.206	56.36	2.46	-14.28	44.54	Average Max	H	129	42	54	-9.46	Pass	
1203.046	63.48	2.14	-15.85	49.77	Peak Max	V	100	40	74	-24.23	Pass	
1203.046	49.52	2.14	-15.85	35.81	Average Max	H	100	316	54	-18.19	Pass	
1987.976	67.35	2.74	-11.26	58.84	Peak [Scan]	H	100	0	68.23	-9.39	Pass	
5462.926	62.22	4.62	-8.4	58.44	Peak [Scan]	V	100	0	68.23	-9.79	Pass	
2124.248	65.01	2.82	-11.03	56.79	Peak [Scan]	H	100	0	68.23	-11.44	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 198 of 293

AP124: 5250-5350GHz ANT-12 (14dBi) Legacy Data Rates


ARUB20 AP124 - ANT-12 (14dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MBit/s)	Compliant
52	5260	ART 17	99%	a 6 Legacy	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

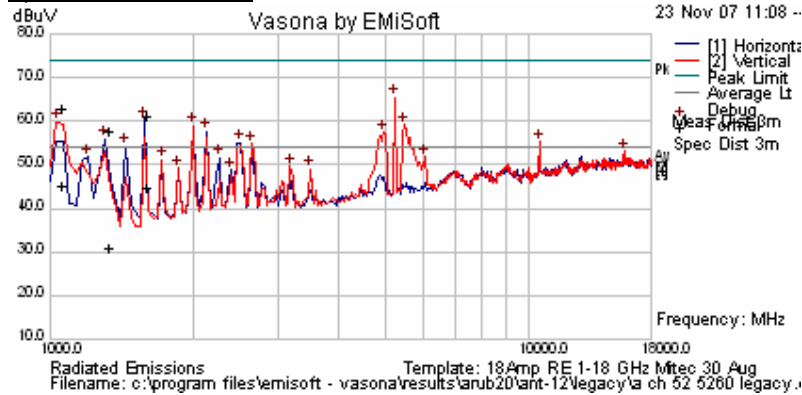

Peak Emission Scan

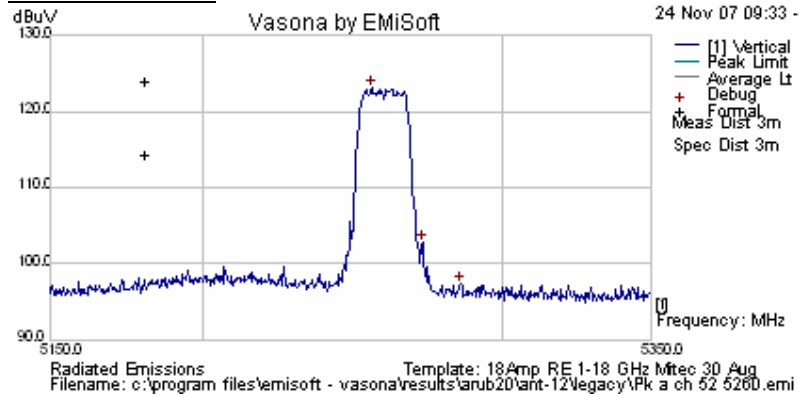

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5256.212	77.71	10.62	34.71	123.04	Peak [Scan]	V	100	0	54	69.04	Fail	Fundamental
1604.569	71.11	2.46	-14.27	59.3	Peak Max	V	108	181	74	-14.7	Pass	
1069.739	74.88	2.02	-16.09	60.81	Peak Max	V	100	23	74	-13.19	Pass	
1335.07	69.08	2.25	-15.56	55.77	Peak Max	V	101	321	74	-18.23	Pass	
1604.569	54.49	2.46	-14.27	42.68	Average Max	H	100	41	54	-11.32	Pass	
1069.739	57.4	2.02	-16.09	43.33	Average Max	V	100	23	54	-10.67	Pass	
1335.07	42.1	2.25	-15.56	28.79	Average Max	H	150	261	54	-25.21	Pass	
1987.976	67.56	2.74	-11.26	59.04	Peak [Scan]	V	100	0	68.23	-9.19	Pass	
2124.248	65.89	2.82	-11.03	57.67	Peak [Scan]	H	100	0	68.23	-10.56	Pass	
10505.01	49.58	6.78	-0.92	55.45	Peak [Scan]	V	100	0	68.23	-12.78	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 199 of 293


ARUB20 AP124 - ANT-12 (14dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MBit/s)	Compliant
60	5300	ART 17	99%	a 6 Legacy	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

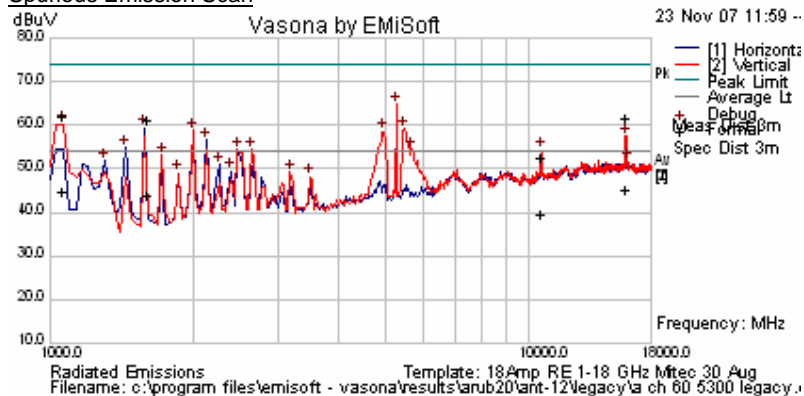

Peak Emission Scan

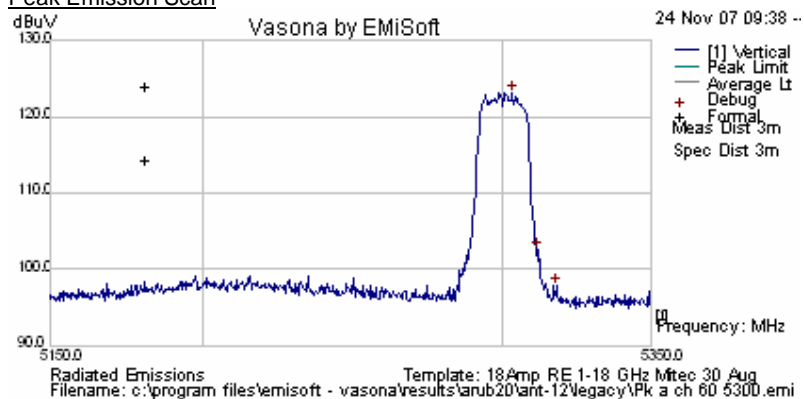

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5303.106	77.77	10.62	34.75	123.14	Peak [Scan]	V	100	0	54	69.14	Fail	Fundamental
1064.509	74.16	2.01	-16.08	60.09	Peak Max	V	105	129	74	-13.91	Pass	
1603.928	71.11	2.46	-14.28	59.3	Peak Max	V	105	181	74	-14.7	Pass	
15901.243	51.69	8.86	-1.02	59.53	Peak Max	V	126	338	74	-14.47	Pass	
10602.214	44.87	6.82	-1.08	50.6	Peak Max	V	140	40	74	-23.4	Pass	
1064.509	56.97	2.01	-16.08	42.9	Average Max	V	105	129	54	-11.1	Pass	
1603.928	53.8	2.46	-14.28	41.98	Average Max	V	105	181	54	-12.02	Pass	
15901.243	35.25	8.86	-1.02	43.09	Average Max	V	126	338	54	-10.91	Pass	
10602.214	31.79	6.82	-1.08	37.53	Average Max	V	140	40	54	-16.47	Pass	
1987.976	67.35	2.74	-11.26	58.83	Peak [Scan]	H	100	0	68.23	-9.40	Pass	
2124.248	64.94	2.82	-11.03	56.73	Peak [Scan]	H	100	0	68.23	-11.50	Pass	


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




ARUB20 AP124 - ANT-12 (14dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MBit/s)	Compliant
64	5320	ART 17	99%	a 6 Legacy	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

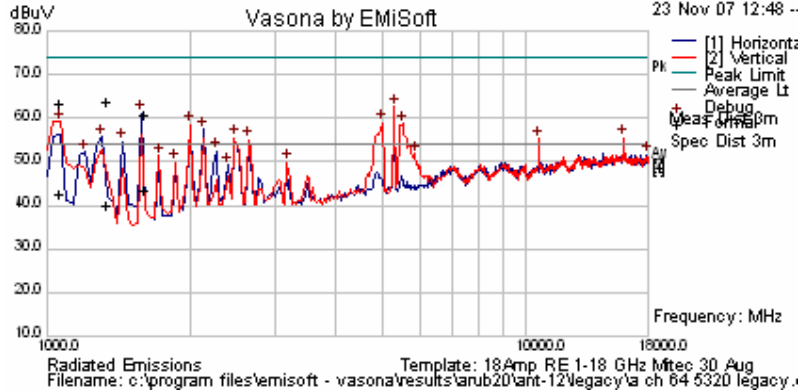


Peak Emission Scan

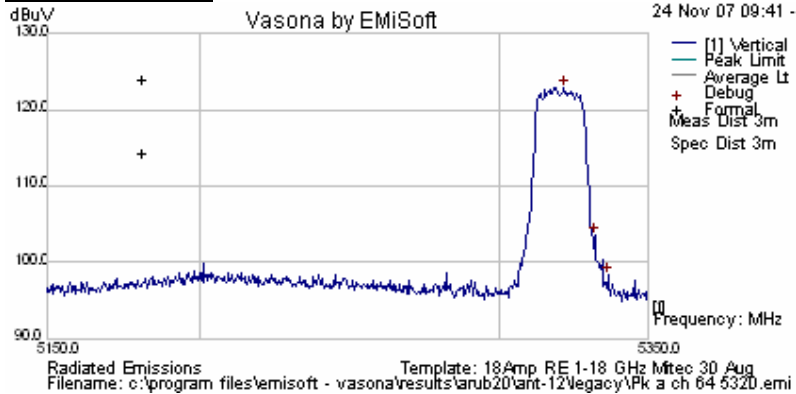

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5321.543	77.48	10.62	34.76	122.86	Peak [Scan]	V	100	0	54	68.86	Fail	Fundamental
5350	ART power Setting = 14.0				Peak Max	V			74	-1.79	Pass	Band-edge
5350	ART power Setting = 14.0				Average Max	V			54	-2.09	Pass	Band-edge
1605.932	70.57	2.46	-14.26	58.77	Peak Max	V	104	184	74	-15.23	Pass	
1070.841	75.36	2.02	-16.09	61.29	Peak Max	V	109	48	74	-12.71	Pass	
1333.066	75	2.25	-15.57	61.68	Peak Max	V	116	277	74	-12.32	Pass	
1605.932	53.31	2.46	-14.26	41.51	Average Max	H	98	40	54	-12.49	Pass	
1070.841	54.61	2.02	-16.09	40.54	Average Max	V	109	48	54	-13.46	Pass	
1333.066	51.18	2.25	-15.57	37.86	Average Max	H	109	118	54	-16.14	Pass	
5531.062	62.44	4.64	-8.32	58.76	Peak [Scan]	H	100	0	68.23	-9.47	Pass	
1987.976	67.13	2.74	-11.26	58.61	Peak [Scan]	H	100	0	68.23	-9.62	Pass	
2124.248	65.71	2.82	-11.03	57.5	Peak [Scan]	H	100	0	68.23	-10.73	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

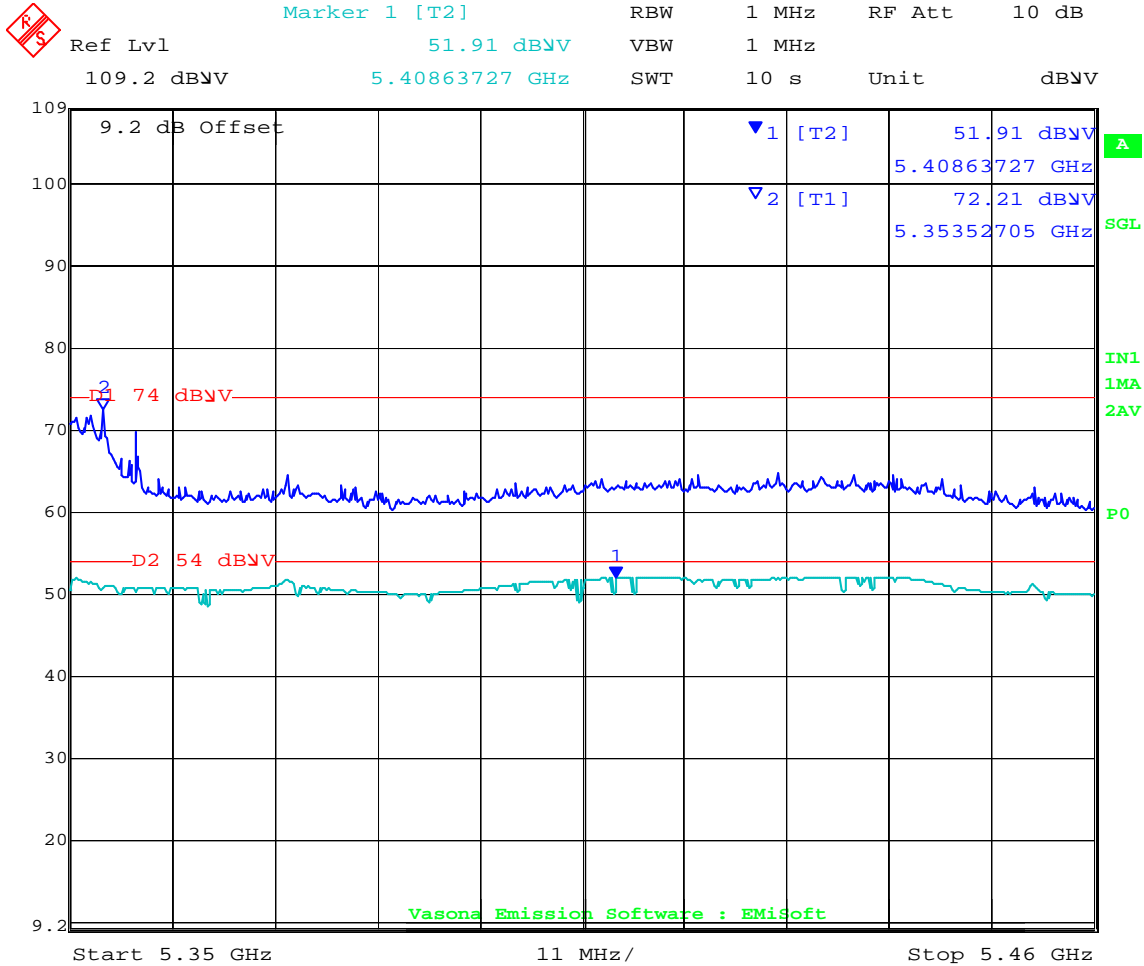

Date: 1.DEC.2007 17:31:18

802.11a Legacy Band-edge @ 5350 MHz with ANT-12

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




AP124 - ANT-12 (14dBi) Legacy Data Rates


ARUB20 AP124 - ANT-12 (14dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MBit/s)	Compliant
100	5500	ART 17	99%	A 6 Legacy	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

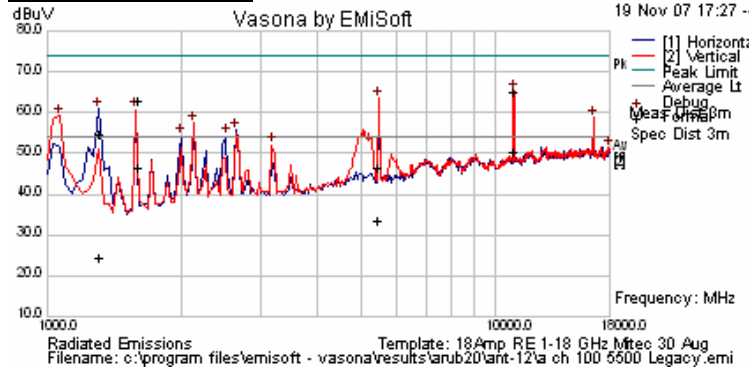

Peak Emission Scan

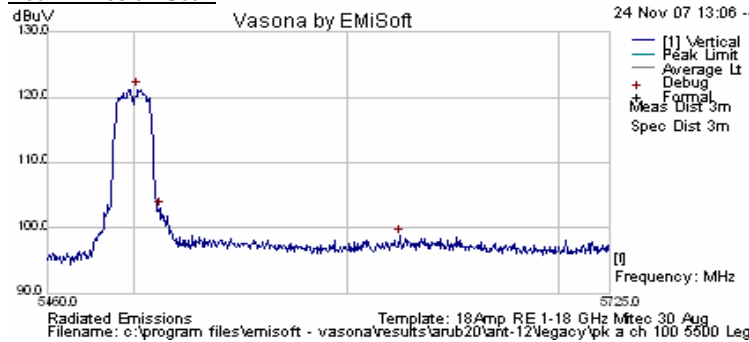


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5501.954	75.71	10.62	34.9	121.24	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
5460.000	ART power Setting = 14.0				Peak Max	V			74	-3.03	Pass	Band-edge
5460.000					Average Max	V			54	-5.25	Pass	Band-edge
11005.21	57.7	6.97	-1.55	63.11	Peak Max	V	125	59	74	-10.89	Pass	
5460	48.25	4.62	-8.4	44.47	Peak Max	V	100	192	74	-29.53	Pass	
1317.765	66.19	2.24	-15.63	52.79	Peak Max	V	102	340	74	-21.21	Pass	
1601.162	72.67	2.46	-14.3	60.83	Peak Max	V	100	224	74	-13.17	Pass	
11005.21	42.92	6.97	-1.55	48.33	Average Max	V	125	59	54	-5.67	Pass	
5460	35.28	4.62	-8.4	31.5	Average Max	H	124	111	54	-22.5	Pass	
1317.765	35.92	2.24	-15.63	22.52	Average Max	H	100	27	54	-31.48	Pass	
1601.162	56.35	2.46	-14.3	44.5	Average Max	V	100	224	54	-9.5	Pass	
16535.07	50.87	8.8	-0.95	58.72	Peak [Scan]	H	100	0	68.23	-9.51	Pass	
2124.248	65.77	2.82	-11.03	57.56	Peak [Scan]	H	100	0	68.23	-10.67	Pass	
2635.271	64.02	3.11	-11.37	55.76	Peak [Scan]	H	100	0	68.23	-12.47	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 203 of 293

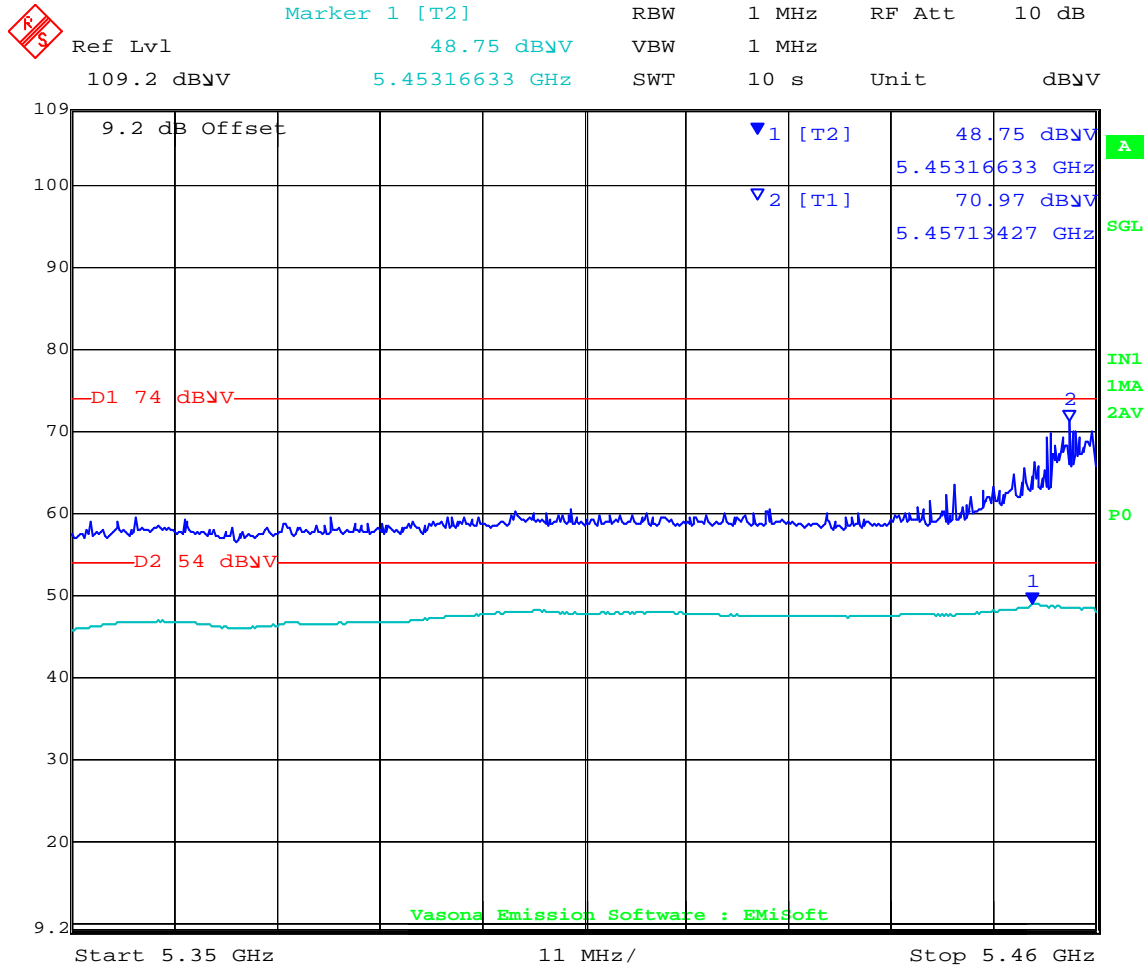

Date: 1.DEC.2007 17:39:03

802.11a Legacy Band-edge @ 5460 MHz with ANT-12


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




ARUB20 AP124 - ANT-12 (14dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MBit/s)	Compliant
120	5600	ART 17	99%	A 6 Legacy	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

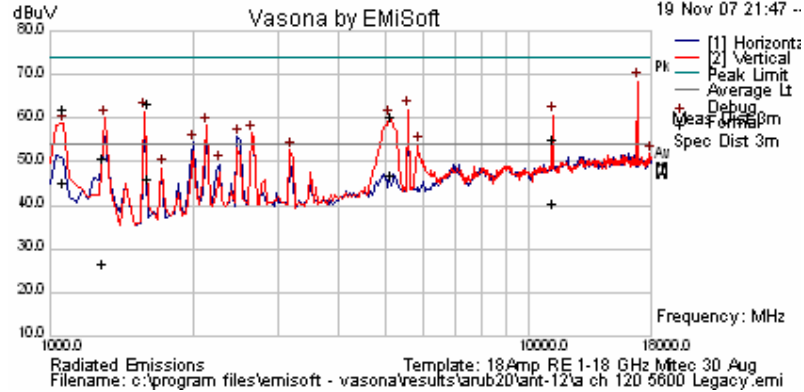

Peak Emission Scan

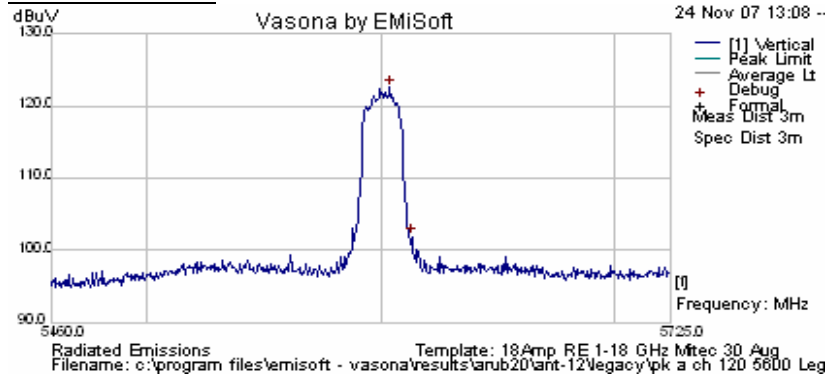

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5603.387	76.9	10.68	34.99	122.56	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
1603.607	73.06	2.46	-14.28	61.24	Peak Max	V	100	224	74	-12.76	Pass	
11186.373	47.87	6.9	-1.87	52.9	Peak Max	V	143	267	74	-21.1	Pass	
1295.416	62.24	2.22	-15.7	48.76	Peak Max	V	120	159	74	-25.24	Pass	
5139.879	63.09	4.62	-9.3	58.41	Peak Max	V	109	0	74	-15.59	Pass	
1068.211	74.28	2.02	-16.09	60.21	Peak Max	V	100	100	74	-13.79	Pass	
1603.607	55.82	2.46	-14.28	44	Average Max	V	100	224	54	-10	Pass	
11186.373	33.46	6.9	-1.87	38.49	Average Max	V	143	267	54	-15.51	Pass	
1295.416	38.07	2.22	-15.7	24.59	Average Max	H	151	33	54	-29.41	Pass	
5139.879	49.43	4.62	-9.3	44.75	Average Max	V	109	0	54	-9.25	Pass	
1068.211	57.18	2.02	-16.09	43.11	Average Max	V	100	100	54	-10.89	Pass	
16807.615	59.57	7.2	-0.99	65.78	Peak [Scan]	H	100	0	68.23	-2.45	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 205 of 293


ARUB20 AP124 - ANT-12 (14dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MBit/s)	Compliant
140	5700	ART 17	99%	A 6 Legacy	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

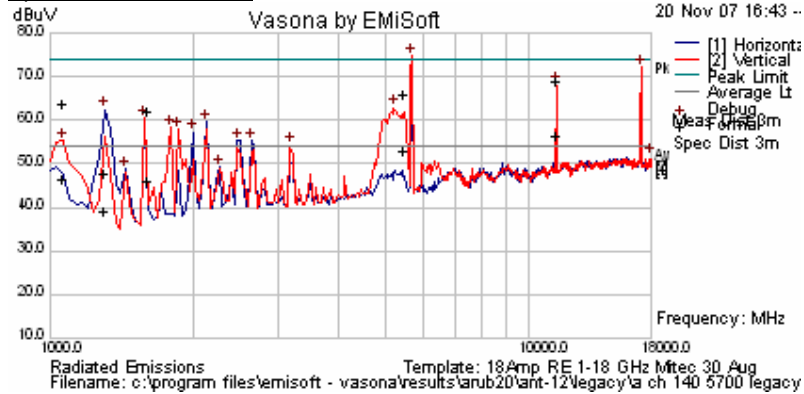

Peak Emission Scan

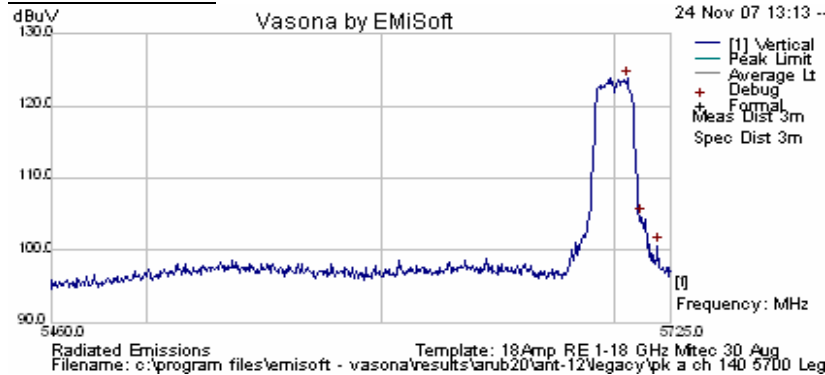

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5705.882	77.98	10.73	35.07	123.79	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
11403.858	61.96	6.82	-1.73	67.06	Peak Max	V	118	247	74	-6.94	Pass	
5460	67.81	4.62	-8.4	64.03	Peak Max	V	101	182	74	-9.97	Pass	
1300.02	59.27	2.22	-15.69	45.8	Peak Max	V	141	269	74	-28.2	Pass	
1603.126	72.04	2.46	-14.28	60.21	Peak Max	V	104	0	74	-13.79	Pass	
1069.499	76.04	2.02	-16.09	61.97	Peak Max	V	104	219	74	-12.03	Pass	
11403.858	49.21	6.82	-1.73	53.7	Average Max	V	118	247	54	-0.3	Pass	
5460	54.53	4.62	-8.4	50.75	Average Max	V	101	182	54	-3.25	Pass	
1300.02	50.74	2.22	-15.69	37.27	Average Max	H	123	256	54	-16.73	Pass	
1603.126	55.87	2.46	-14.28	44.05	Average Max	H	141	160	54	-9.95	Pass	
1069.499	58.39	2.02	-16.09	44.32	Average Max	V	104	219	54	-9.68	Pass	
17114.228	62.14	6.37	-0.74	67.77	Peak [Scan]	H	100	0	68.23	-0.46	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 206 of 293

AP124: 5150-5250GHz ANT-12 (14dBi) HT-20 Data Rates


ARUB20 AP124 - ANT-12 (14dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
36	5180	ART 17	99%	6.5 HT-20	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

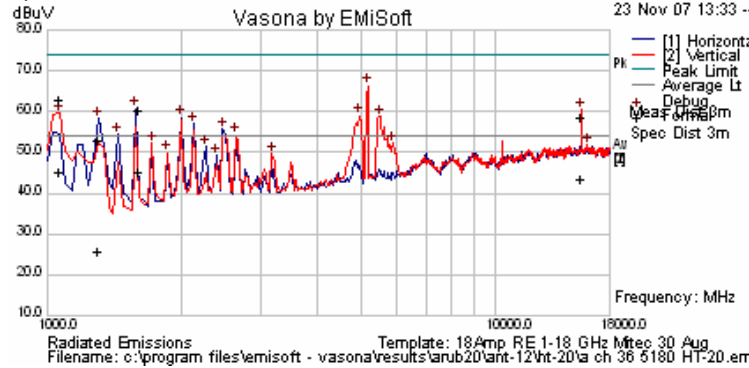

Peak Emission Scan

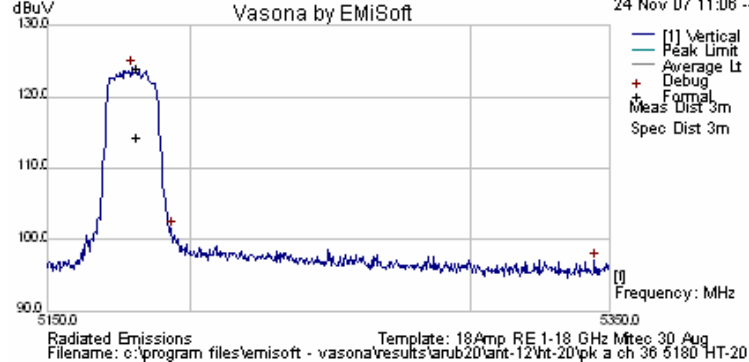


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5179.659	78.75	10.62	34.65	124.01	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
5150.000	ART Power Setting = 13.0				Peak Max	V			74	-5.31	Pass	Band-edge
5150.000	ART Power Setting = 13.0				Average Max	V			54	-1.00	Pass	Band-edge
1604.569	70.29	2.46	-14.27	58.48	Peak Max	V	111	182	74	-15.52	Pass	
15543.41	49.31	8.28	-1.04	56.55	Peak Max	V	120	347	74	-17.45	Pass	
1069.92	75	2.02	-16.09	60.93	Peak Max	V	104	25	74	-13.07	Pass	
1304.128	64.26	2.23	-15.68	50.8	Peak Max	V	122	289	74	-23.2	Pass	
1604.569	54.98	2.46	-14.27	43.17	Average Max	H	98	40	54	-10.83	Pass	
15543.41	34.33	8.28	-1.04	41.57	Average Max	V	120	347	54	-12.43	Pass	
1069.92	57.3	2.02	-16.09	43.23	Average Max	V	104	25	54	-10.77	Pass	
1304.128	37.04	2.23	-15.68	23.59	Average Max	H	113	107	54	-30.41	Pass	
5531.062	62.42	4.64	-8.32	58.74	Peak [Scan]	V	100	0	68.23	-9.49	Pass	
1987.976	67.1	2.74	-11.26	58.58	Peak [Scan]	H	100	0	68.23	-9.65	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 207 of 293

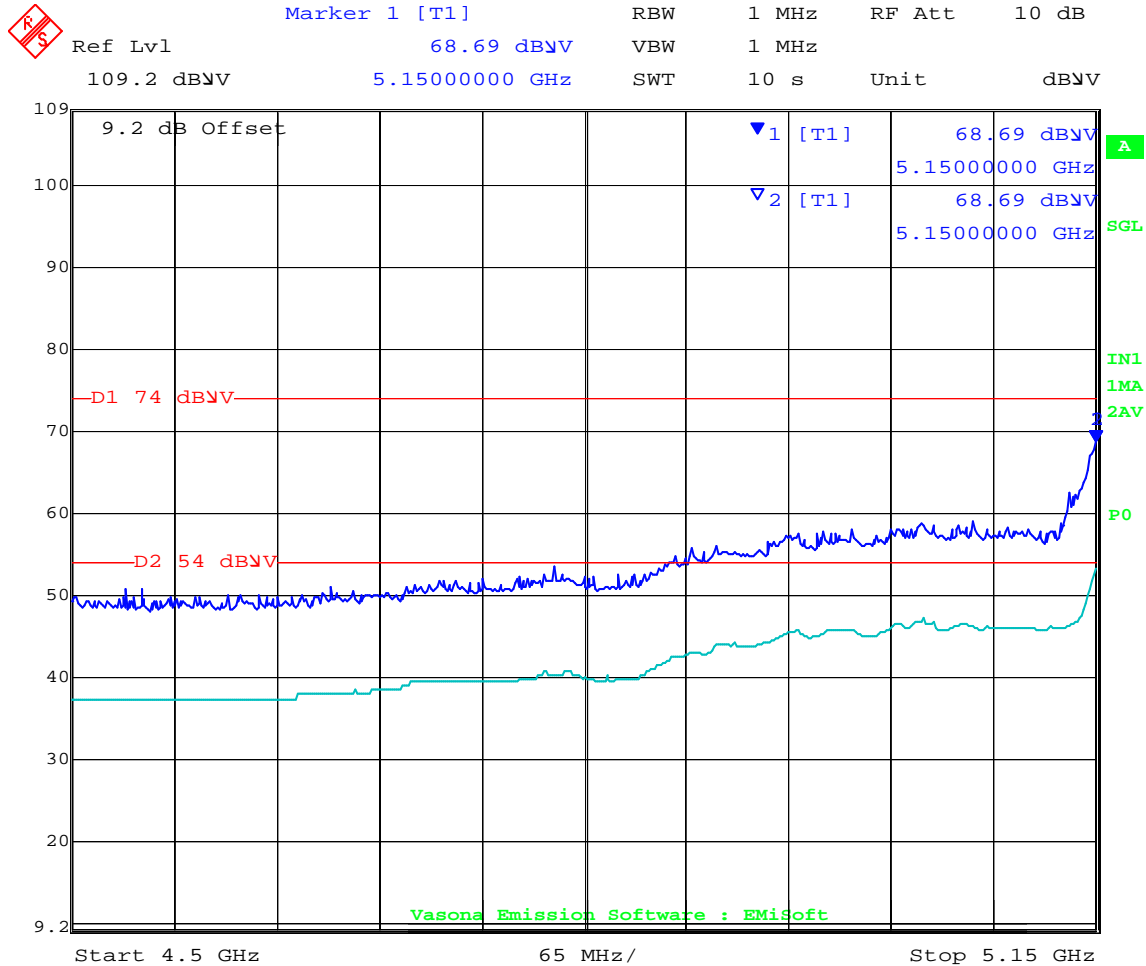

Date: 1.DEC.2007 17:23:37

HT-20 Band-edge @ 5150 MHz with ANT-12

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 208 of 293


ARUB20 AP124 - ANT-12 (14dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
40	5200	ART 17	99%	6.5 HT-20	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

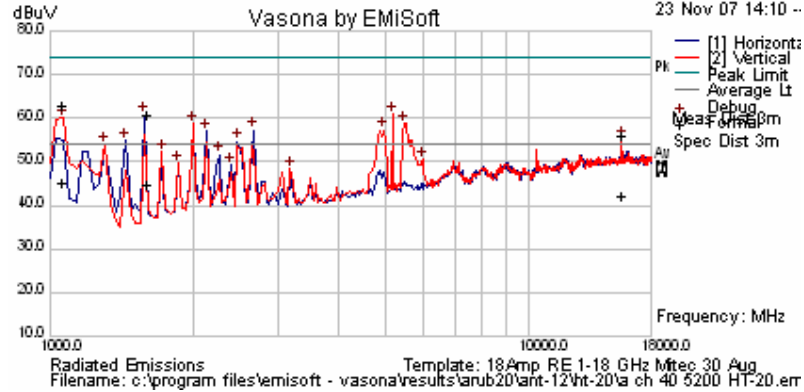

Peak Emission Scan

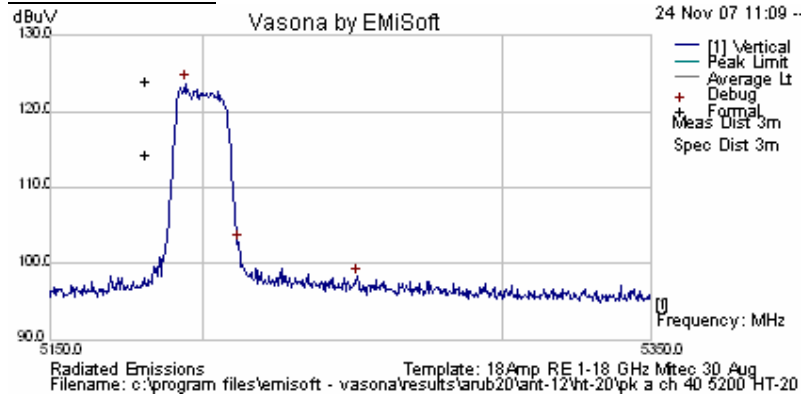

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5194.489	78.42	10.62	34.66	123.70	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
1604.248	70.71	2.46	-14.27	58.89	Peak Max	V	150	183	74	-15.11	Pass	
1070.04	75	2.02	-16.09	60.93	Peak Max	V	104	39	74	-13.07	Pass	
15604.23	46.72	8.38	-1.16	53.94	Peak Max	V	140	294	74	-20.06	Pass	
1604.248	54.67	2.46	-14.27	42.86	Average Max	H	98	42	54	-11.14	Pass	
1070.04	57.26	2.02	-16.09	43.19	Average Max	V	104	39	54	-10.81	Pass	
15604.23	32.88	8.38	-1.16	40.1	Average Max	V	140	294	54	-13.9	Pass	
1987.976	67.31	2.74	-11.26	58.79	Peak [Scan]	V	100	0	68.23	-9.44	Pass	
2669.339	65.53	3.14	-11.36	57.31	Peak [Scan]	H	100	0	68.23	-10.92	Pass	
2124.248	65.33	2.82	-11.03	57.12	Peak [Scan]	H	100	0	68.23	-11.11	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 209 of 293


ARUB20 AP124 - ANT-12 (14dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
48	5240	ART 17	99%	6.5 HT-20	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

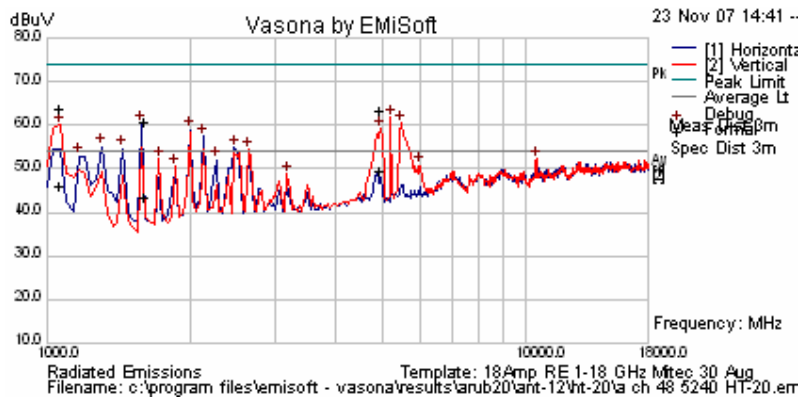

Peak Emission Scan

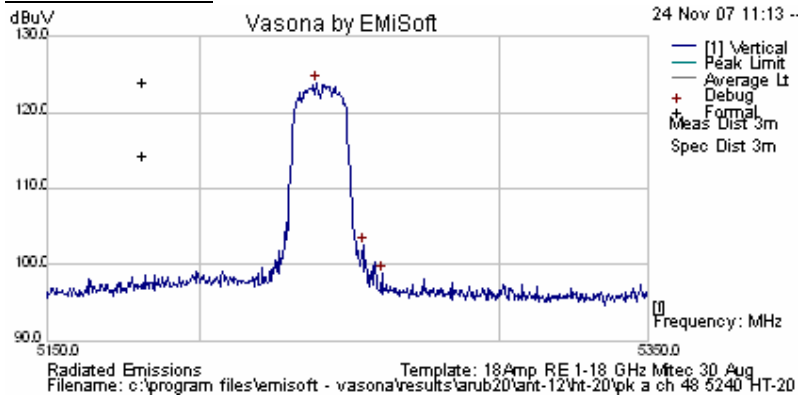

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5238.577	78.54	10.62	34.7	123.85	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
1605.851	70.71	2.46	-14.26	58.91	Peak Max	V	106	182	74	-15.09	Pass	
1070.401	76.04	2.02	-16.09	61.97	Peak Max	V	105	46	74	-12.03	Pass	
4948.938	65.93	4.58	-9.29	61.21	Peak Max	V	103	130	74	-12.79	Pass	
1605.851	53.26	2.46	-14.26	41.46	Average Max	H	98	40	54	-12.54	Pass	
1070.401	57.9	2.02	-16.09	43.83	Average Max	V	105	46	54	-10.17	Pass	
4948.938	51.98	4.58	-9.29	47.26	Average Max	V	103	130	54	-6.74	Pass	
1987.976	67.56	2.74	-11.26	59.04	Peak [Scan]	H	100	0	68.23	-9.19	Pass	
2124.248	65.78	2.82	-11.03	57.56	Peak [Scan]	H	100	0	68.23	-10.67	Pass	
2464.93	62.99	2.98	-11.17	54.80	Peak [Scan]	H	100	0	68.23	-13.43	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




AP124: 5250-5350GHz ANT-12 (14dBi) HT-20 Data Rates


ARUB20 AP124 - ANT-12 (14dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
52	5260	ART 17	99%	6.5 HT-20	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

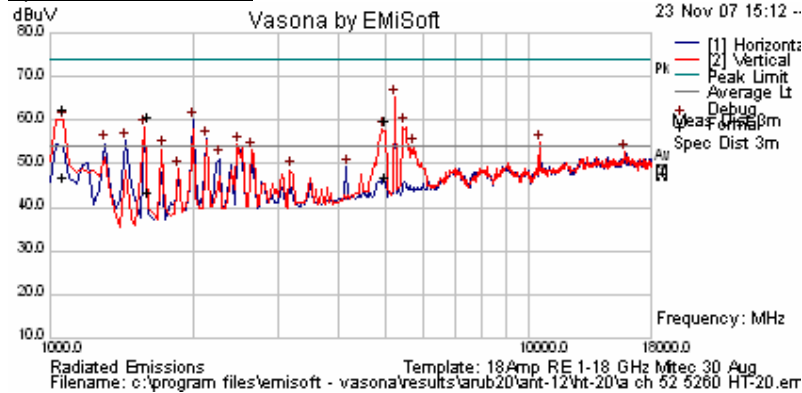

Peak Emission Scan

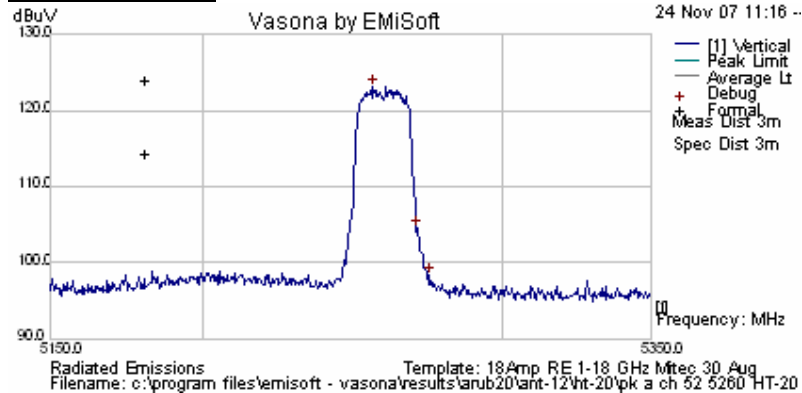

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5256.613	77.78	10.62	34.71	123.11	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
1066.663	74.52	2.02	-16.09	60.45	Peak Max	V	98	15	74	-13.55	Pass	
1606.032	70.71	2.46	-14.26	58.91	Peak Max	V	104	181	74	-15.09	Pass	
5005.531	62.67	4.62	-9.35	57.95	Peak Max	V	98	127	74	-16.05	Pass	
1066.663	58.85	2.02	-16.09	44.78	Average Max	V	98	15	54	-9.22	Pass	
1606.032	53.27	2.46	-14.26	41.47	Average Max	H	98	40	54	-12.53	Pass	
5005.531	49.81	4.62	-9.35	45.08	Average Max	V	98	127	54	-8.92	Pass	
1987.976	68.56	2.74	-11.26	60.04	Peak [Scan]	H	100	0	68.23	-8.19	Pass	
5462.926	62.41	4.62	-8.4	58.63	Peak [Scan]	V	100	0	68.23	-9.60	Pass	
2124.248	64.05	2.82	-11.03	55.83	Peak [Scan]	H	100	0	68.23	-12.40	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 211 of 293


ARUB20 AP124 - ANT-12 (14dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
60	5300	ART 17	99%	6.5 HT-20	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

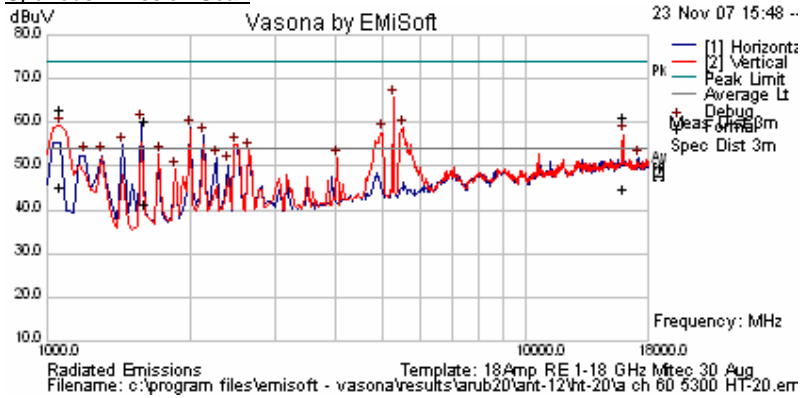

Peak Emission Scan

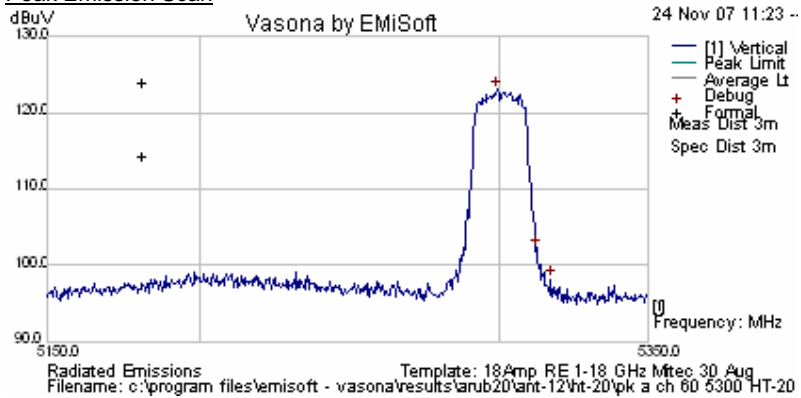

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5299.098	77.63	10.62	34.74	123.00	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
1606.152	70.02	2.46	-14.25	58.22	Peak Max	V	109	183	74	-15.78	Pass	
1070.045	75.11	2.02	-16.09	61.04	Peak Max	V	105	18	74	-12.96	Pass	
15903.447	51.16	8.87	-1.02	59.01	Peak Max	V	106	323	74	-14.99	Pass	
1606.152	51.23	2.46	-14.25	39.44	Average Max	H	98	40	54	-14.56	Pass	
1070.045	57.28	2.02	-16.09	43.21	Average Max	V	105	18	54	-10.79	Pass	
15903.447	34.75	8.87	-1.02	42.60	Average Max	V	106	323	54	-11.4	Pass	
1987.976	67.32	2.74	-11.26	58.8	Peak [Scan]	H	100	0	68.23	-9.43	Pass	
5531.062	62.36	4.64	-8.32	58.68	Peak [Scan]	H	100	0	68.23	-9.55	Pass	
5020.040	62.41	4.62	-9.31	57.72	Peak [Scan]	H	100	0	68.23	-10.51	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 212 of 293


ARUB20 AP124 - ANT-12 (14dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
64	5320	ART 17	99%	6.5 HT-20	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

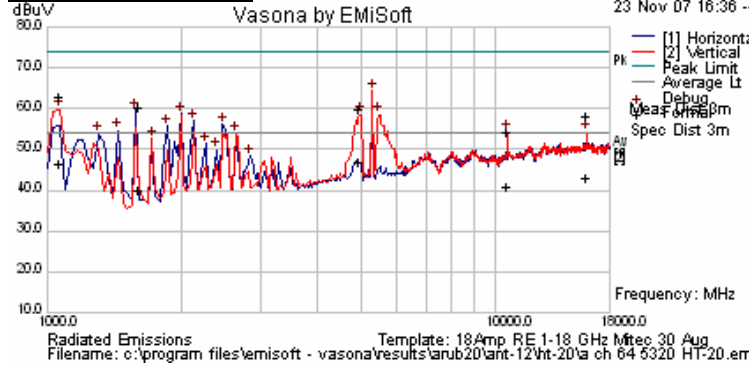

Peak Emission Scan

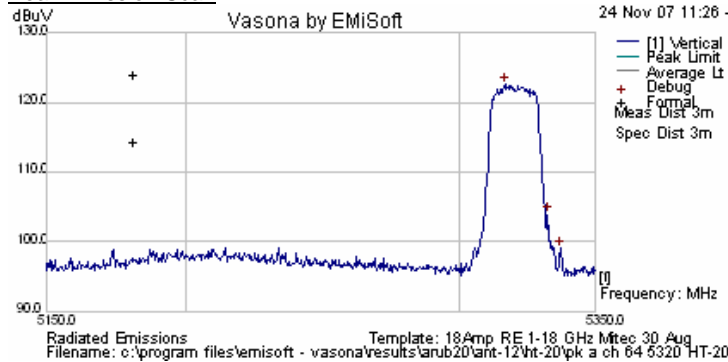


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5316.733	77.17	10.62	34.76	122.55	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
5350.000	ART power Setting = 14.0				Peak Max	V			74	-1.79	Pass	Band-edge
5350.000					Average Max	V			54	-2.09	Pass	Band-edge
1067.144	74.76	2.02	-16.09	60.69	Peak Max	V	101	18	74	-13.31	Pass	
1606.212	70.29	2.46	-14.25	58.5	Peak Max	V	151	186	74	-15.5	Pass	
4951.984	62.39	4.58	-9.3	57.66	Peak Max	V	104	140	74	-16.34	Pass	
10641.283	46.72	6.83	-1.18	52.37	Peak Max	V	151	46	74	-21.63	Pass	
15958.327	48.12	8.95	-1.01	56.07	Peak Max	V	98	321	74	-17.93	Pass	
1067.144	58.72	2.02	-16.09	44.65	Average Max	V	101	18	54	-9.35	Pass	
1606.212	49.85	2.46	-14.25	38.05	Average Max	V	151	186	54	-15.95	Pass	
4951.984	49.45	4.58	-9.3	44.72	Average Max	V	104	140	54	-9.28	Pass	
10641.283	33.23	6.83	-1.18	38.89	Average Max	V	151	46	54	-15.11	Pass	
15958.327	32.97	8.95	-1.01	40.92	Average Max	V	98	321	54	-13.08	Pass	
1987.976	67.21	2.74	-11.26	58.69	Peak [Scan]	H	100	0	68.23	-9.54	Pass	
5496.994	62.33	4.62	-8.38	58.57	Peak [Scan]	H	100	0	68.23	-9.66	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 213 of 293

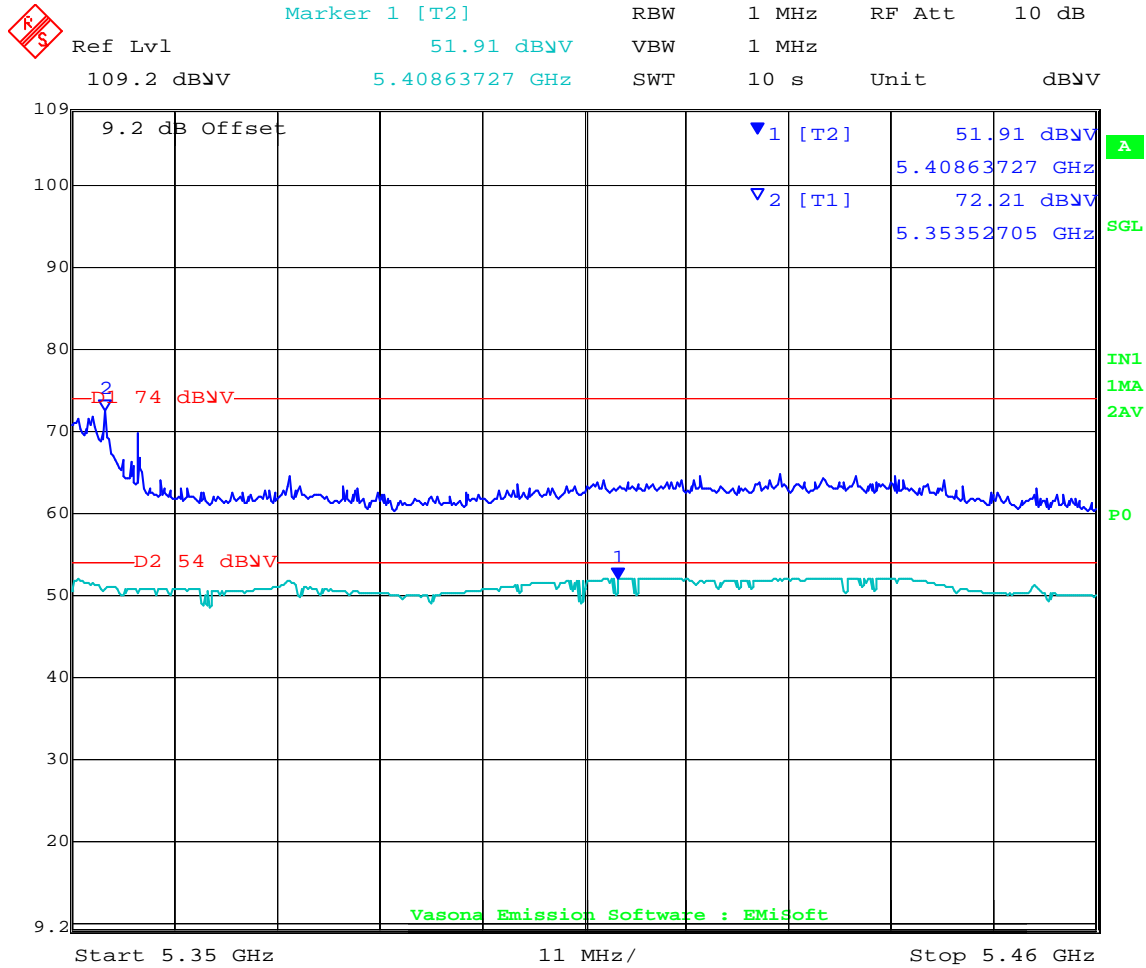

Date: 1.DEC.2007 17:31:18

HT-20 Band-edge @ 5350 MHz with ANT-12

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




AP124: 5460-5725 MHz ANT-12 (14dBi) HT-20 Data Rates


ARUB20 AP124 - ANT-12 (14dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
100	5500	ART 17	99%	6.5 HT-20	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

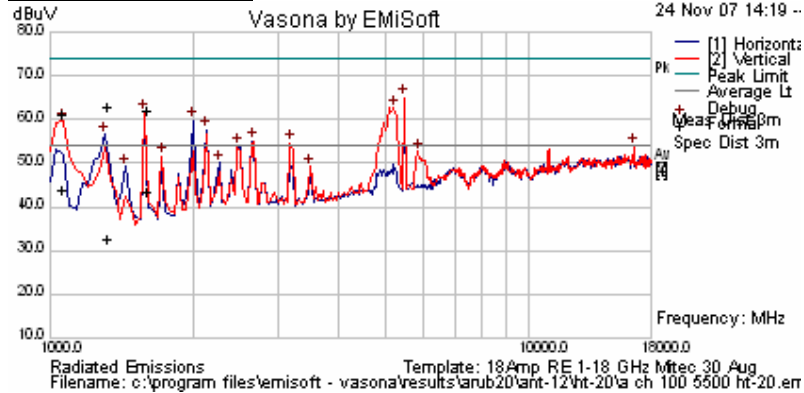

Peak Emission Scan

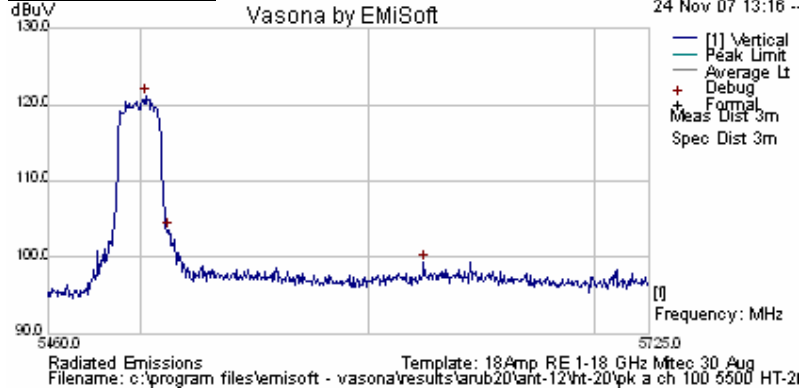


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5502.485	75.53	10.62	34.9	121.05	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
5460.000	ART Power Setting = 14.0				Peak Max	V			74		Pass	Band-edge
5460.000					Average Max	V			54		Pass	Band-edge
1605.851	71.91	2.46	-14.26	60.11	Peak Max	V	142	180	74	-13.89	Pass	
1065.957	73.06	2.02	-16.09	58.99	Peak Max	V	101	124	74	-15.01	Pass	
1329.639	74.4	2.25	-15.58	61.06	Peak Max	V	104	266	74	-12.94	Pass	
1605.851	53.21	2.46	-14.26	41.41	Average Max	V	142	180	54	-12.59	Pass	
1065.957	56.1	2.02	-16.09	42.03	Average Max	V	101	124	54	-11.97	Pass	
1329.639	43.76	2.25	-15.58	30.42	Average Max	H	99	255	54	-23.58	Pass	
5224.449	67.24	4.62	-9.09	62.77	Peak [Scan]	H	100	0	68.23	-5.46	Pass	
1987.976	68.38	2.74	-11.26	59.86	Peak [Scan]	H	100	0	68.23	-8.37	Pass	
2124.248	65.95	2.82	-11.03	57.74	Peak [Scan]	H	100	0	68.23	-10.49	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 215 of 293

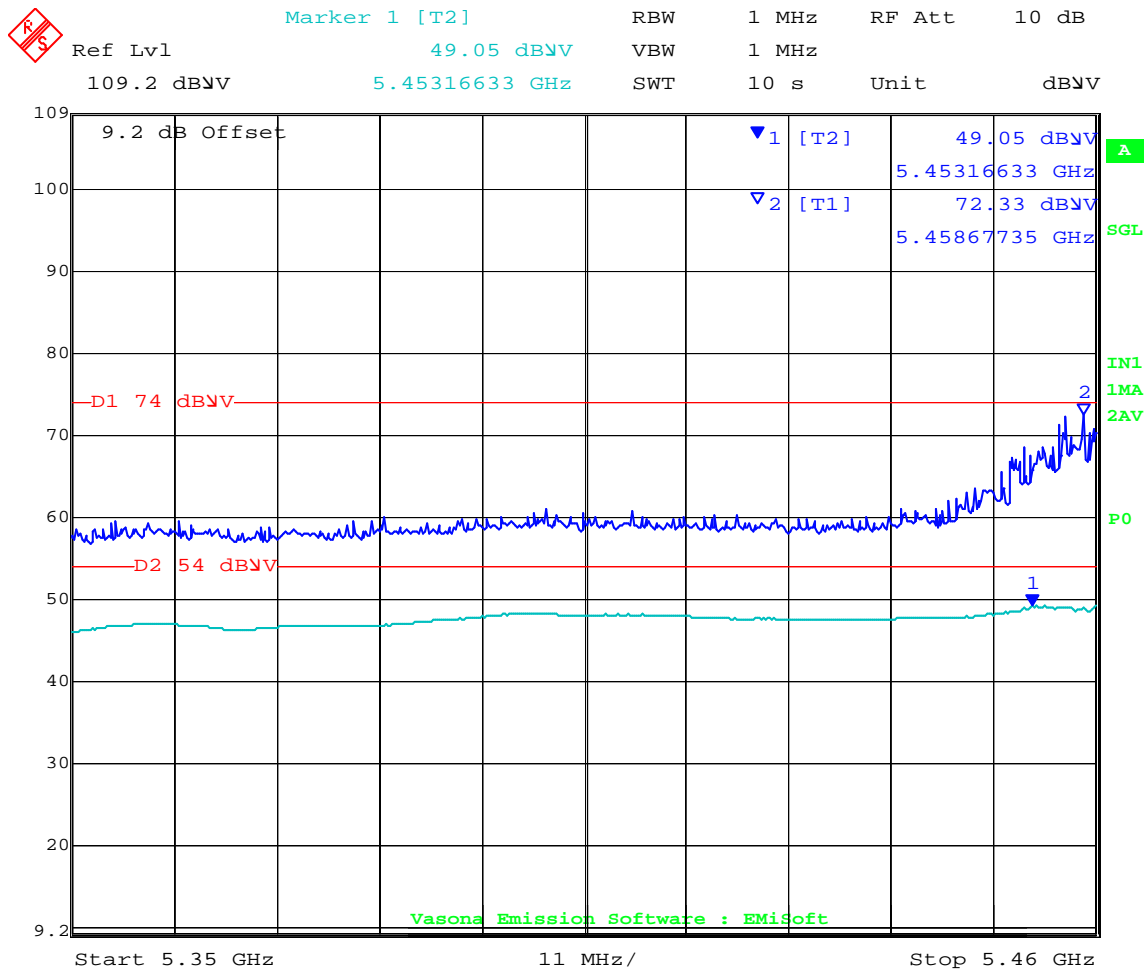

Date: 1.DEC.2007 17:40:25

HT-20 Band-edge @ 5460 MHz with ANT-12

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 216 of 293


ARUB20 AP124 - ANT-12 (14dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
120	5600	ART 17	99%	6.5 HT-20	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

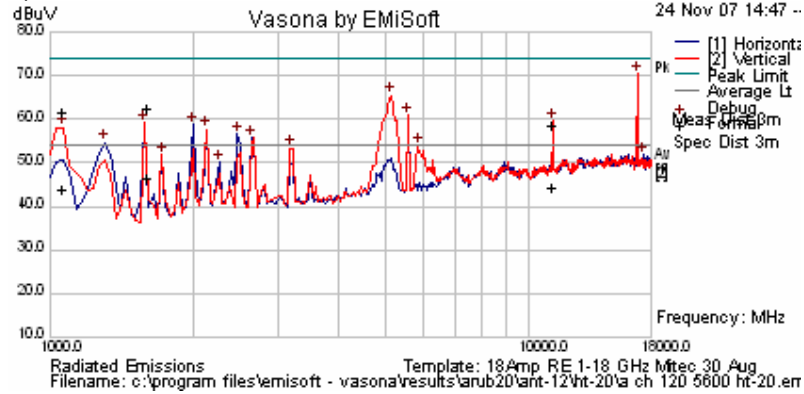

Peak Emission Scan

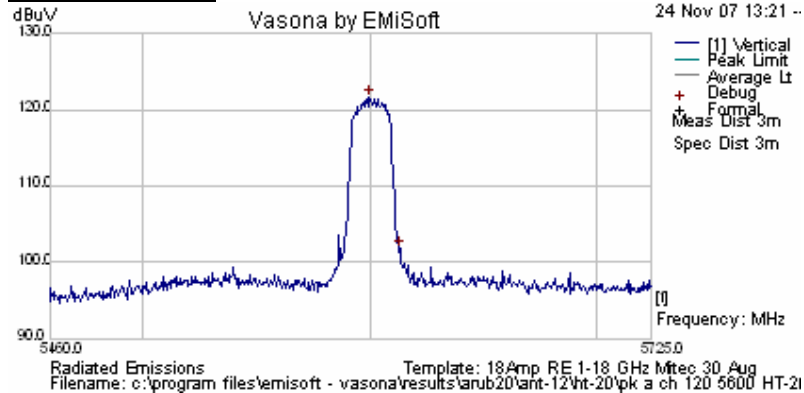

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	PoI	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5599.138	76.01	10.68	34.98	121.67	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
11199.669	51.29	6.9	-1.84	56.35	Peak Max	V	106	69	74	-17.65	Pass	
1601.012	72.42	2.46	-14.3	60.57	Peak Max	V	99	177	74	-13.43	Pass	
1067.865	73.48	2.02	-16.09	59.41	Peak Max	V	98	13	74	-14.59	Pass	
11199.669	37.35	6.9	-1.84	42.41	Average Max	V	106	69	54	-11.59	Pass	
1601.012	56.09	2.46	-14.3	44.24	Average Max	V	99	177	54	-9.76	Pass	
1067.865	55.91	2.02	-16.09	41.84	Average Max	V	98	13	54	-12.16	Pass	
16807.615	61.47	7.2	-0.99	67.68	Peak [Scan]	H	100	0	68.23	-0.55	Pass	
5156.313	70.18	4.62	-9.28	65.52	Peak [Scan]	H	100	0	68.23	-2.71	Pass	
1987.976	67.22	2.74	-11.26	58.7	Peak [Scan]	H	100	0	68.23	-9.53	Pass	
2124.248	65.94	2.82	-11.03	57.73	Peak [Scan]	H	100	0	68.23	-10.50	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 217 of 293


ARUB20 AP124 - ANT-12 (14dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
140	5700	ART 17	99%	6.5 HT-20	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

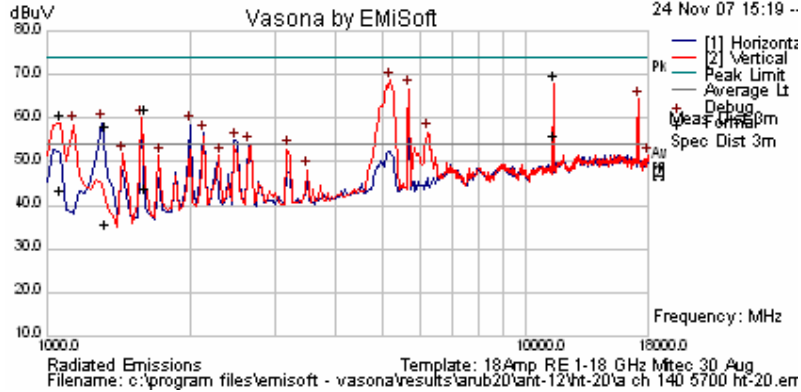

Peak Emission Scan

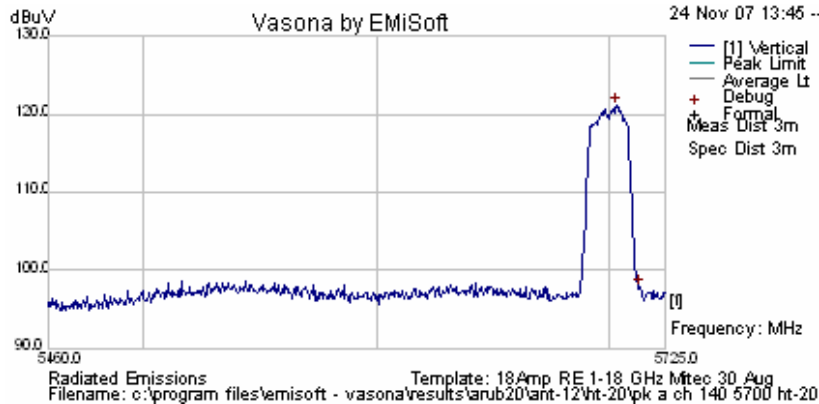

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5703.758	75.25	10.73	35.07	121.05	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
11401.303	62.81	6.82	-1.73	67.91	Peak Max	V	103	166	74	-6.09	Pass	
1605.851	72.04	2.46	-14.26	60.24	Peak Max	V	99	182	74	-13.76	Pass	
1329.399	69.62	2.24	-15.58	56.28	Peak Max	V	105	239	74	-17.72	Pass	
1064.829	72.93	2.02	-16.08	58.86	Peak Max	V	98	124	74	-15.14	Pass	
11401.303	48.75	6.82	-1.73	53.84	Average Max	V	103	166	54	-0.16	Pass	
1605.851	53.48	2.46	-14.26	41.68	Average Max	V	99	182	54	-12.32	Pass	
1329.399	46.76	2.24	-15.58	33.42	Average Max	H	151	103	54	-20.58	Pass	
1064.829	55.32	2.02	-16.08	41.25	Average Max	V	98	124	54	-12.75	Pass	
5190.381	70.11	4.62	-9.21	65.52	Peak [Scan]	H	100	0	68.23	-2.71	Pass	
17114.228	54.55	6.37	-0.74	60.18	Peak [Scan]	H	100	0	68.23	-8.05	Pass	
1987.976	67.1	2.74	-11.26	58.58	Peak [Scan]	H	100	0	68.23	-9.65	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 218 of 293


AP124: 5150-5250GHz ANT-12 (14dBi) HT-40 Data Rates

ARUB20 AP124 - ANT-12 (14dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
	5190	ART 17	99%	13.5 HT-40	Yes


Three antennas operating simultaneously

NRB = None Restrictive Band

Spurious Emission Scan

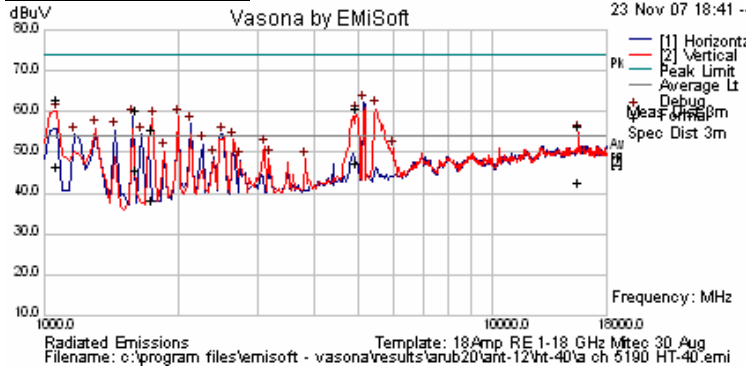

Peak Emission Scan

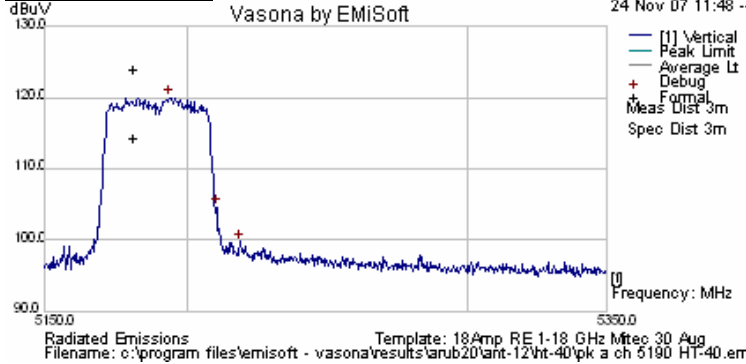


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5194.088	74.74	10.62	34.66	120.02	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
5150.000	ART Power Setting = 7.0				Peak Max	V			74	-5.31	Pass	Band-edge
5150.000	ART Power Setting = 7.0				Average Max	V			54	-0.95	Pass	Band-edge
1068.136	75	2.02	-16.09	60.93	Peak Max	V	105	27	74	-13.07	Pass	
4954.534	63.48	4.58	-9.31	58.76	Peak Max	V	100	137	74	-15.24	Pass	
1603.619	70.16	2.46	-14.28	58.34	Peak Max	V	105	181	74	-15.66	Pass	
1736.201	64.13	2.56	-13.29	53.41	Peak Max	V	104	201	74	-20.59	Pass	
15574.43	47.22	8.33	-1.2	54.35	Peak Max	V	102	312	74	-19.65	Pass	
1068.136	58.37	2.02	-16.09	44.3	Average Max	V	105	27	54	-9.7	Pass	
4954.534	50.07	4.58	-9.31	45.34	Average Max	V	100	137	54	-8.66	Pass	
1603.619	55.61	2.46	-14.28	43.79	Average Max	H	100	42	54	-10.21	Pass	
1736.201	47.06	2.56	-13.29	36.34	Average Max	V	104	201	54	-17.66	Pass	
15574.43	33.23	8.33	-1.2	40.36	Average Max	V	102	312	54	-13.64	Pass	
5496.994	64.48	4.62	-8.38	60.72	Peak [Scan]	V	100	0	68.23	-7.51	Pass	
1987.976	67.21	2.74	-11.26	58.69	Peak [Scan]	V	100	0	68.23	-9.54	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 219 of 293

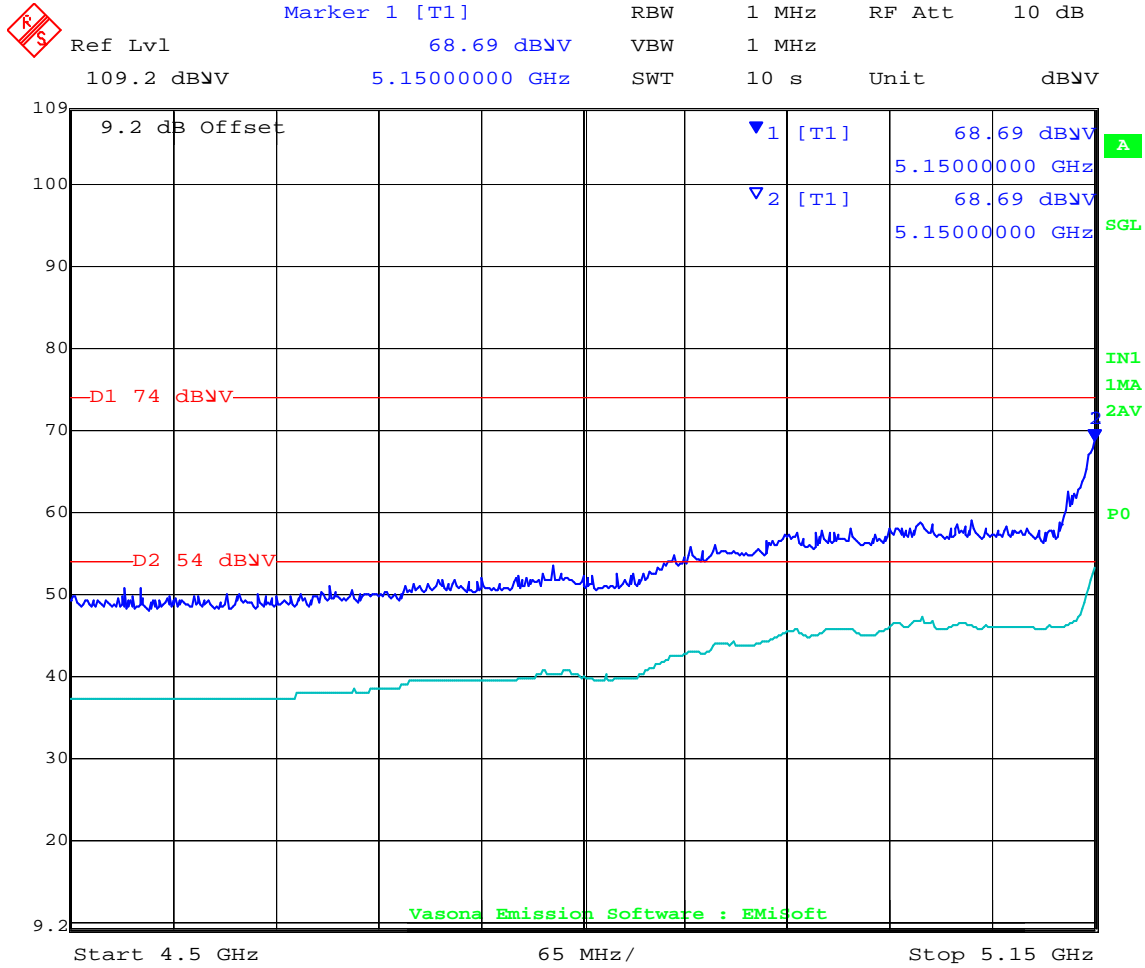

Date: 1.DEC.2007 17:23:46

HT-40 Band-edge @ 5150 MHz with ANT-12

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 220 of 293


ARUB20 AP124 - ANT-12 (14dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
	5230	ART 17	99%	13.5 HT-40	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

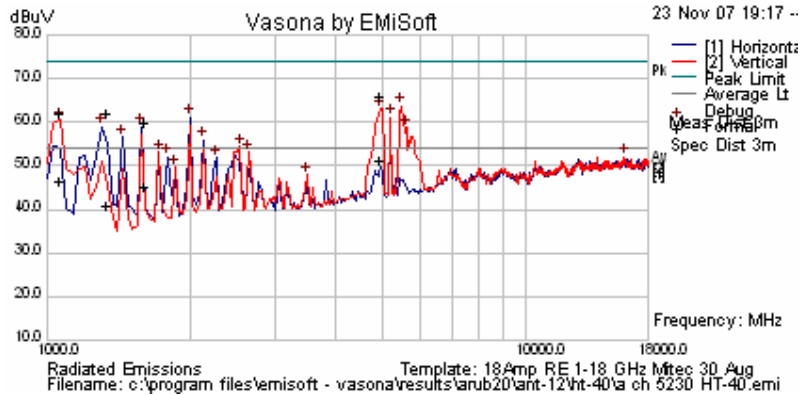

Peak Emission Scan

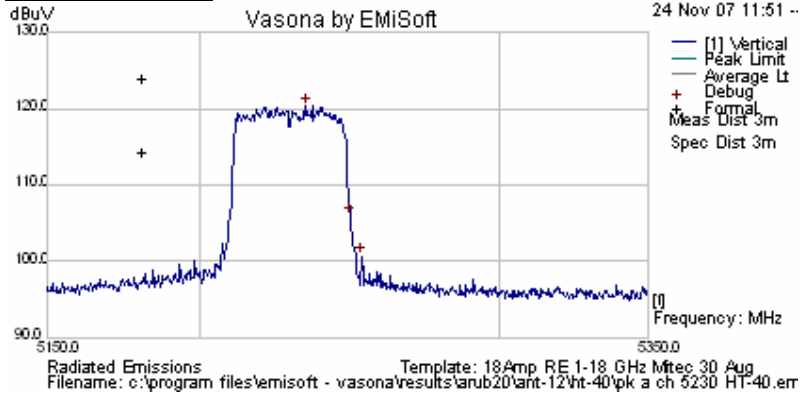

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5235.371	75.07	10.62	34.69	120.38	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
4946.894	68.7	4.57	-9.29	63.98	Peak Max	V	103	128	74	-10.02	Pass	
1066.483	74.16	2.02	-16.09	60.09	Peak Max	V	100	15	74	-13.91	Pass	
1603.747	69.89	2.46	-14.28	58.07	Peak Max	V	110	177	74	-15.93	Pass	
1332.224	73.34	2.25	-15.57	60.02	Peak Max	V	100	305	74	-13.98	Pass	
4946.894	53.73	4.57	-9.29	49.02	Average Max	V	103	128	54	-4.98	Pass	
1066.483	58.71	2.02	-16.09	44.64	Average Max	V	100	15	54	-9.36	Pass	
1603.747	55.09	2.46	-14.28	43.27	Average Max	H	139	43	54	-10.73	Pass	
1332.224	52.36	2.25	-15.57	39.03	Average Max	H	108	79	54	-14.97	Pass	
5496.994	67.58	4.62	-8.38	63.83	Peak [Scan]	V	100	0	68.23	-4.40	Pass	
5224.449	65.69	4.62	-9.09	61.22	Peak [Scan]	V	100	0	68.23	-7.01	Pass	
1987.976	69.71	2.74	-11.26	61.19	Peak [Scan]	H	100	0	68.23	-7.04	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 221 of 293


ARUB20 AP124 - ANT-12 (14dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
	5270	ART 17	99%	13.5	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

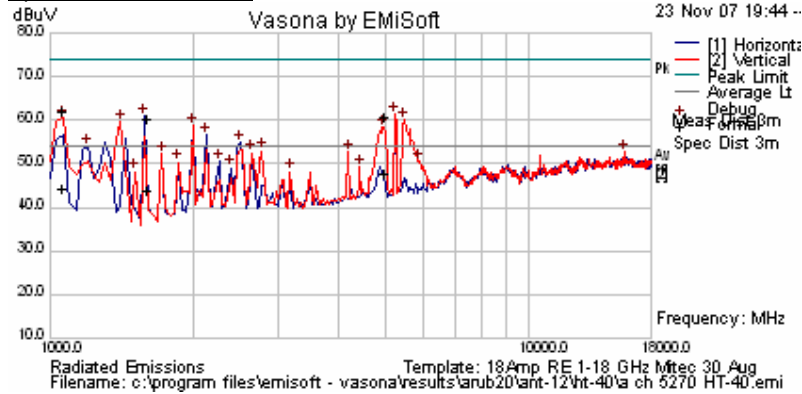

Peak Emission Scan

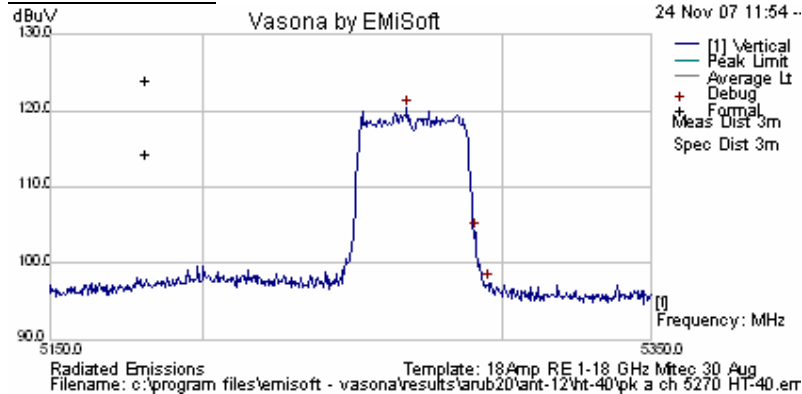

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5267.836	75.1	10.62	34.72	120.44	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
1605.536	69.89	2.46	-14.26	58.09	Peak Max	V	106	184	74	-15.91	Pass	
1070.466	74.28	2.02	-16.09	60.21	Peak Max	V	110	36	74	-13.79	Pass	
4993.667	63.35	4.61	-9.37	58.6	Peak Max	V	109	129	74	-15.4	Pass	
1605.536	53.74	2.46	-14.26	41.94	Average Max	H	98	38	54	-12.06	Pass	
1070.466	56.33	2.02	-16.09	42.26	Average Max	V	110	36	54	-11.74	Pass	
4993.667	50.38	4.61	-9.37	45.63	Average Max	V	109	129	54	-8.37	Pass	
5496.994	63.9	4.62	-8.38	60.14	Peak [Scan]	V	100	0	68.23	-8.09	Pass	
1987.976	67.43	2.74	-11.26	58.91	Peak [Scan]	H	100	0	68.23	-9.32	Pass	
2124.248	64.73	2.82	-11.03	56.51	Peak [Scan]	H	100	0	68.23	-11.72	Pass	
2498.998	63.21	3	-11.26	54.95	Peak [Scan]	H	100	0	68.23	-13.28	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 222 of 293


ARUB20 AP124 - ANT-12 (14dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
	5310	ART 17	99%	13.5	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

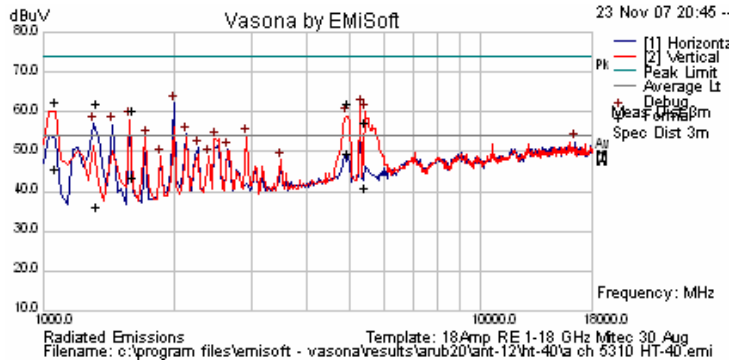

Peak Emission Scan

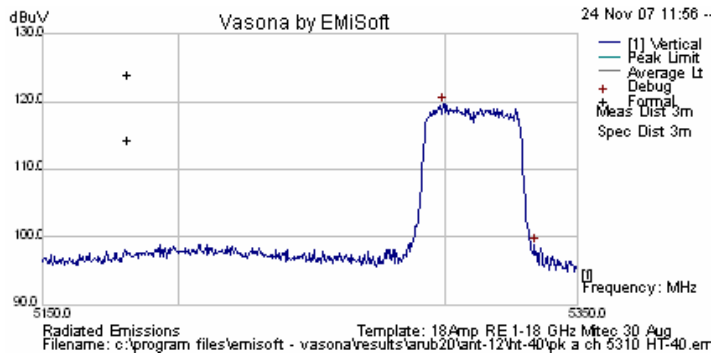


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5299.098	74.24	10.62	34.74	119.61	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
5350.000	ART power Setting = 10.0				Peak Max	V			74	-6.53	Pass	Band-edge
5350.000	ART power Setting = 10.0				Average Max	V			54	-1.09	Pass	Band-edge
1065.641	74.4	2.02	-16.09	60.33	Peak Max	V	103	16	74	-13.67	Pass	
5442.415	58.89	4.62	-8.39	55.13	Peak Max	V	131	149	74	-18.87	Pass	
4949.7	64.77	4.58	-9.3	60.05	Peak Max	V	103	131	74	-13.95	Pass	
1605.851	70.29	2.46	-14.26	58.5	Peak Max	V	106	182	74	-15.5	Pass	
1330.962	73.48	2.25	-15.58	60.15	Peak Max	V	98	302	74	-13.85	Pass	
1065.641	57.53	2.02	-16.09	43.46	Average Max	V	103	16	54	-10.54	Pass	
5442.415	42.45	4.62	-8.39	38.69	Average Max	V	131	149	54	-15.31	Pass	
4949.7	52.15	4.58	-9.3	47.43	Average Max	V	103	131	54	-6.57	Pass	
1605.851	53.18	2.46	-14.26	41.38	Average Max	H	139	39	54	-12.62	Pass	
1330.962	47.53	2.25	-15.58	34.19	Average Max	V	98	302	54	-19.81	Pass	
1987.976	70.88	2.74	-11.26	62.36	Peak [Scan]	H	100	0	68.23	-5.87	Pass	
2124.248	62.72	2.82	-11.03	54.51	Peak [Scan]	H	100	0	68.23	-13.72	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 223 of 293

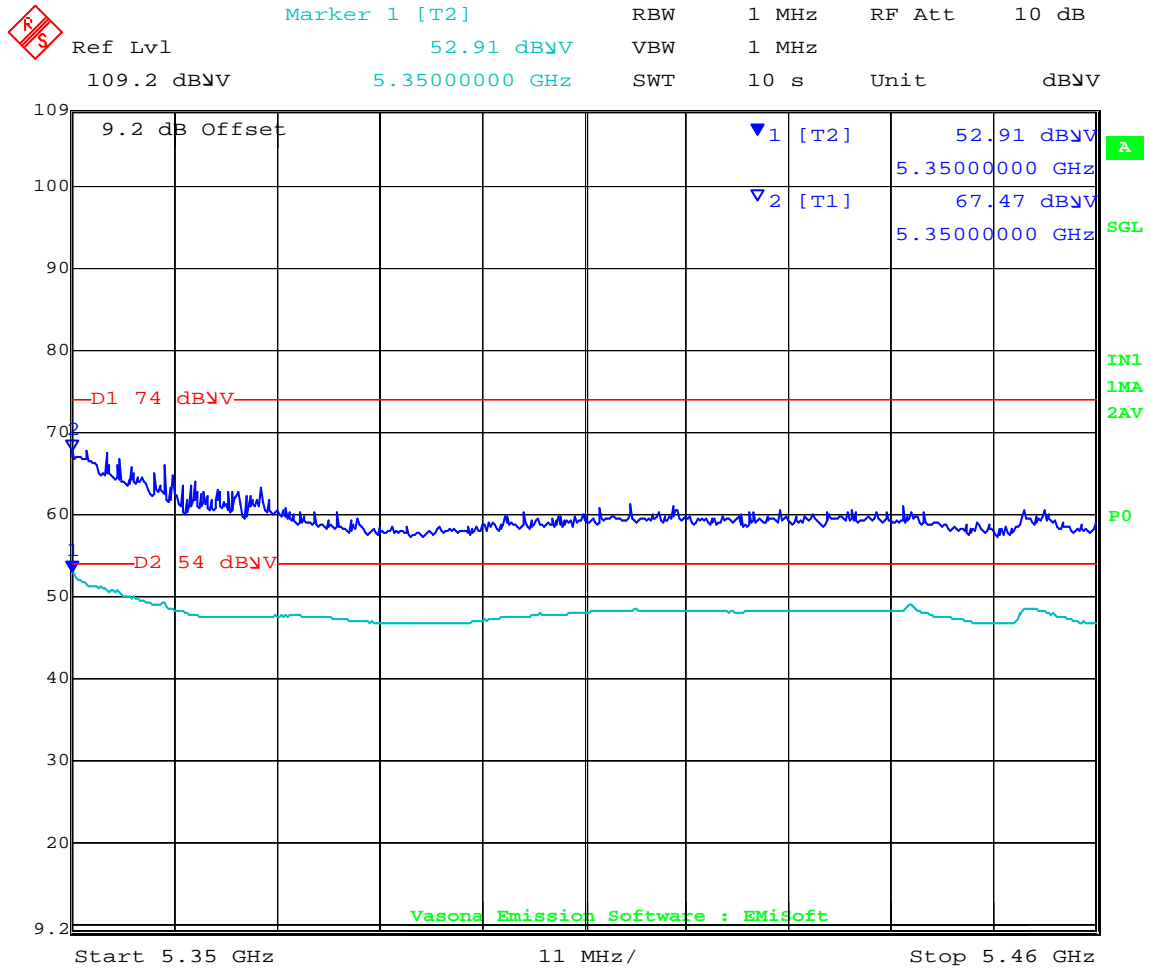

Date: 1.DEC.2007 17:29:00

HT-40 Band-edge @ 5350 MHz with ANT-12

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 224 of 293

AP124: 5470-5725 MHz ANT-12 (14dBi) HT-40 Data Rates


ARUB20 AP124 - ANT-12 (14dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
	5510	ART 17	99%	13.5 HT-40	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

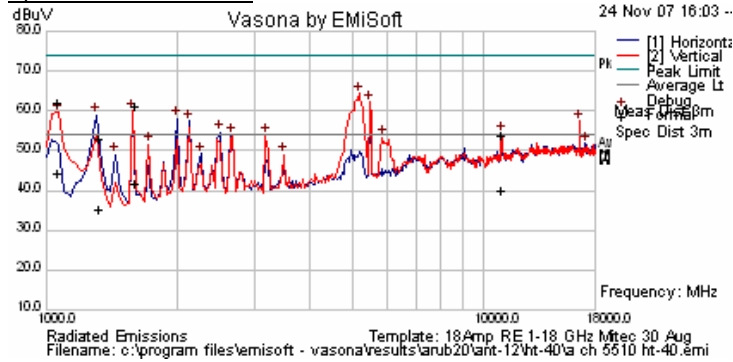

Peak Emission Scan

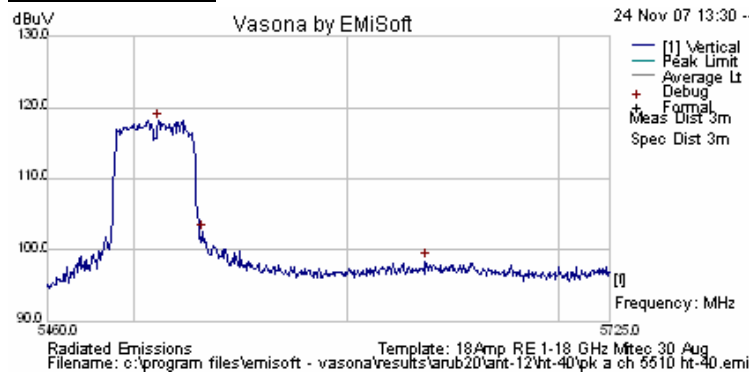


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5511.513	72.58	10.63	34.91	118.11	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
5460.000	ART Power Setting = 11.0				Peak Max	V			74	-3.55	Pass	Band-edge
5460.000	ART Power Setting = 11.0				Average Max	V			54	-4.95	Pass	Band-edge
1606.107	70.98	2.46	-14.26	59.19	Peak Max	V	103	183	74	-14.81	Pass	
1068.091	74.04	2.02	-16.09	59.97	Peak Max	V	98	16	74	-14.03	Pass	
1329.399	64.26	2.24	-15.58	50.92	Peak Max	V	143	233	74	-23.08	Pass	
11016.032	46.34	6.96	-1.58	51.73	Peak Max	V	140	340	74	-22.27	Pass	
1606.107	51.47	2.46	-14.26	39.67	Average Max	V	103	183	54	-14.33	Pass	
1068.091	56.39	2.02	-16.09	42.32	Average Max	V	98	16	54	-11.68	Pass	
1329.399	46.68	2.24	-15.58	33.34	Average Max	H	110	42	54	-20.66	Pass	
11016.032	32.51	6.96	-1.58	37.9	Average Max	V	140	340	54	-16.1	Pass	
5190.381	69.15	4.62	-9.21	64.56	Peak [Scan]	H	100	0	68.23	-3.67	Pass	
1987.976	66.65	2.74	-11.26	58.13	Peak [Scan]	H	100	0	68.23	-10.10	Pass	
2124.248	65.75	2.82	-11.03	57.54	Peak [Scan]	H	100	0	68.23	-10.69	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 225 of 293

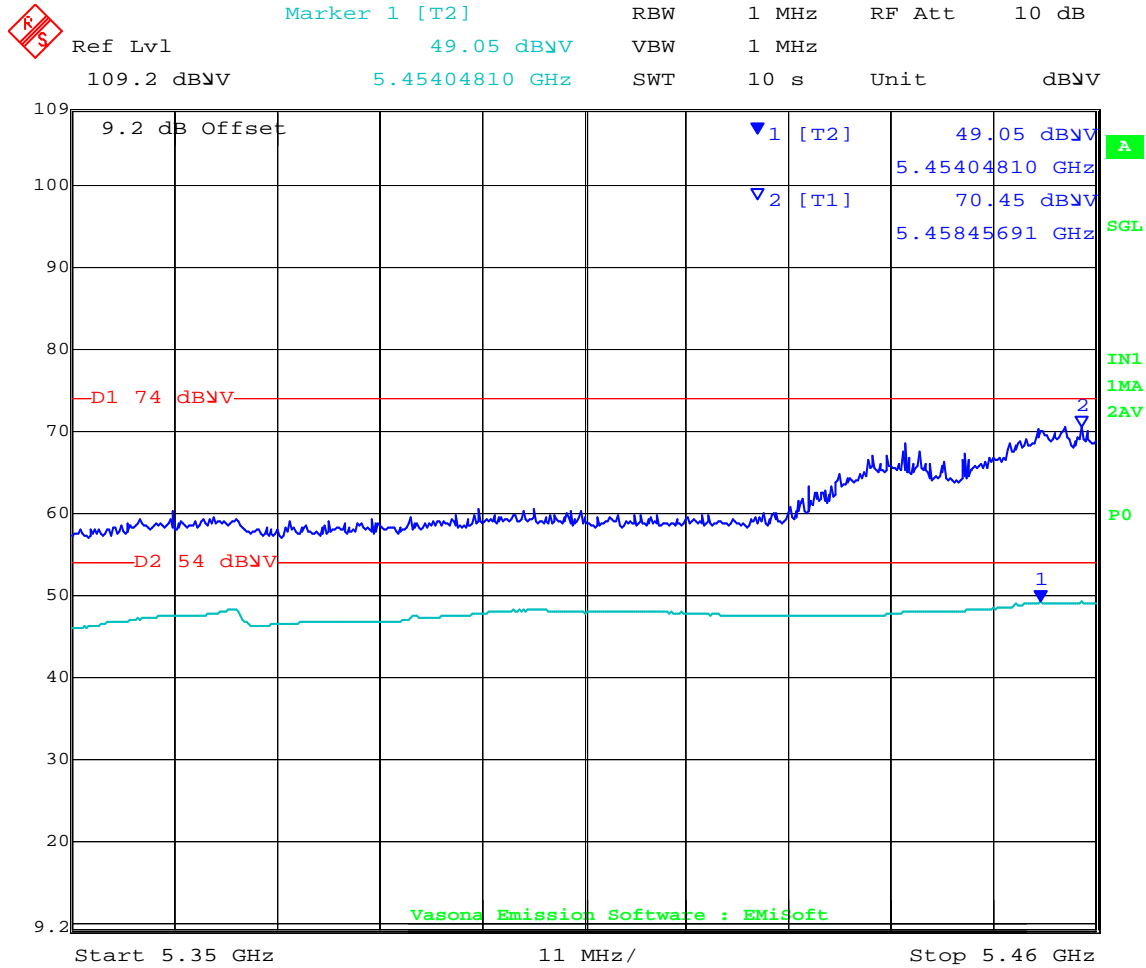

Date: 1.DEC.2007 17:43:11

HT-40 Band-edge @ 5460 MHz with ANT-12

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 226 of 293


ARUB20 AP124 - ANT-12 (14dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
	5620	ART 17	99%	13.5 HT-40	Yes

Three antennas operating simultaneously
 NRB = None Restrictive Band

Spurious Emission Scan

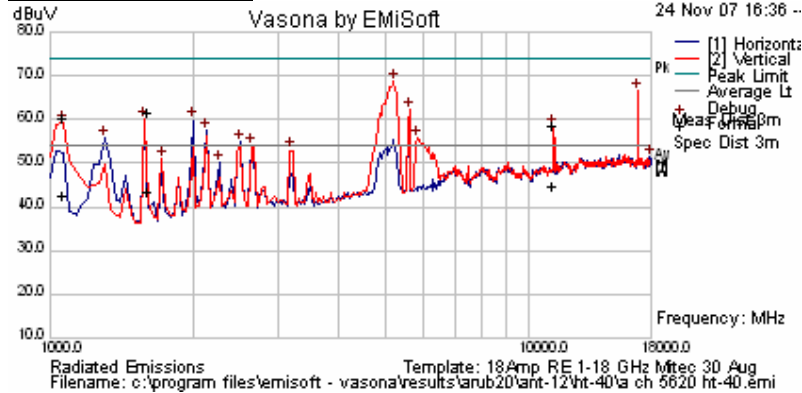

Peak Emission Scan

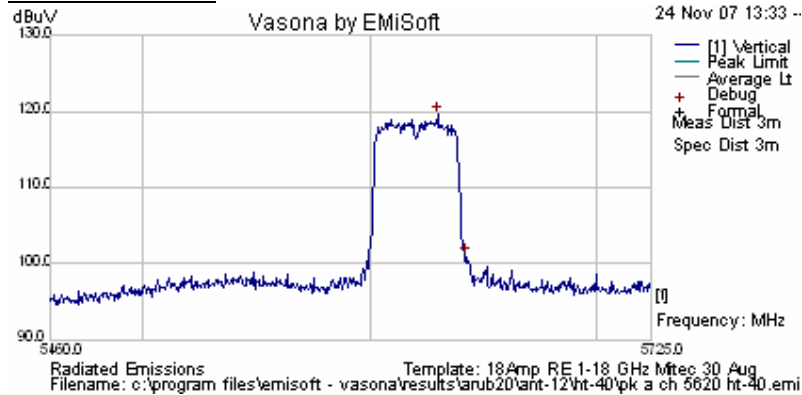

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5629.409	73.84	10.69	35.01	119.53	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
1605.431	71.51	2.46	-14.26	59.71	Peak Max	V	102	179	74	-14.29	Pass	
1063.387	72.55	2.01	-16.08	58.48	Peak Max	V	98	143	74	-15.52	Pass	
11220.441	51.42	6.89	-1.8	56.51	Peak Max	V	108	62	74	-17.49	Pass	
1605.431	53.11	2.46	-14.26	41.3	Average Max	V	102	179	54	-12.7	Pass	
1063.387	54.55	2.01	-16.08	40.48	Average Max	V	98	143	54	-13.52	Pass	
11220.441	37.47	6.89	-1.8	42.56	Average Max	V	108	62	54	-11.44	Pass	
5224.449	70.30	4.62	-9.09	65.83	Peak [Scan]	H	100	0	68.23	-2.40	Pass	
16875.752	57.54	7.16	-0.97	63.73	Peak [Scan]	H	100	0	68.23	-4.50	Pass	
1987.976	68.41	2.74	-11.26	59.89	Peak [Scan]	H	100	0	68.23	-8.34	Pass	
2124.248	65.6	2.82	-11.03	57.39	Peak [Scan]	H	100	0	68.23	-10.84	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 227 of 293


ARUB20 AP124 - ANT-12 (14dBi) Test Configuration					
Channel	Freq (MHz)	Software Pwr Setting	Duty Cycle	Data Rate (MCS)	Compliant
	5690	ART 16*	99%	13.5 HT-40	Yes

Three antennas operating simultaneously


NRB = None Restrictive Band

*Reduction in output power required to bring into compliance

Spurious Emission Scan

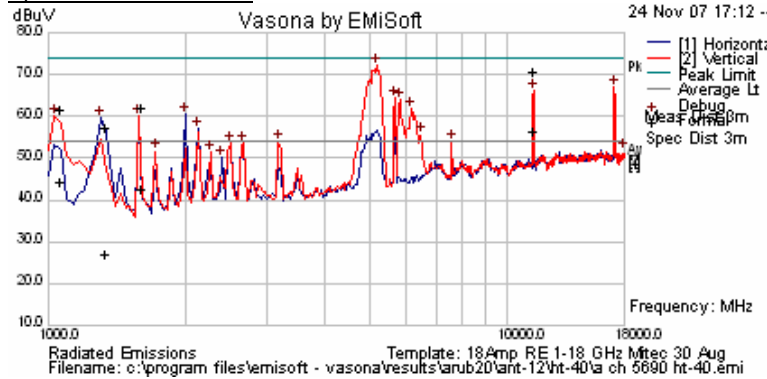

Peak Emission Scan

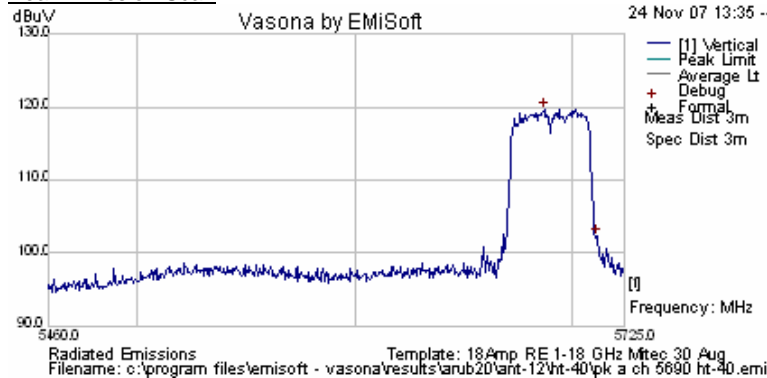

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB	Pass /Fail	Comments
5687.295	73.84	10.72	35.05	119.61	Peak [Scan]	V	100	0	N/A	N/A	N/A	Fundamental
11380.441	63.61	6.83	-1.76	68.69	Peak Max	V	118	49	74	-5.31	Pass	
1606.062	71.64	2.46	-14.26	59.85	Peak Max	V	101	181	74	-14.15	Pass	
1068.096	73.76	2.02	-16.09	59.69	Peak Max	V	98	43	74	-14.31	Pass	
1338.356	68.7	2.25	-15.55	55.4	Peak Max	V	115	301	74	-18.6	Pass	
11380.441	47.89	6.83	-1.76	52.97	Average Max	V	118	49	54	-1.03	Pass	
1606.062	52.17	2.46	-14.26	40.37	Average Max	V	101	181	54	-13.63	Pass	
1068.096	56.3	2.02	-16.09	42.23	Average Max	V	98	43	54	-11.77	Pass	
1338.356	38.05	2.25	-15.55	24.75	Average Max	H	115	187	54	-29.25	Pass	
5190.381	70.77	4.62	-9.21	66.18	Peak [Scan]	H	100	0	68.23	-2.05	Pass	
17080.16	59.28	8.52	-0.79	67.01	Peak [Scan]	V	100	0	99.61	-32.60	Pass	
5837.675	67.36	4.8	-8.3	63.86	Peak [Scan]	V	100	0	99.61	-35.75	Pass	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Specification

Limits

15.407 (b)(2). All emissions outside of the 5,150-5,350MHz band shall not exceed an EIRP of -27dBm/MHz.

§15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

§15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

RSS-210 §A9.3(2) For transmitters operating in the 5250-5350 MHz band, all emissions outside the 5150-5350 MHz band shall not exceed -27 dBm/MHz e.i.r.p. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band shall not exceed out of band emission limit of 27 dBm/MHz e.i.r.p. in the 5150-5250 MHz band in order to operate indoor/outdoor, or alternatively shall comply with the spectral power density for operation within the 5150-5250 MHz band and shall be labeled "for indoor use only".

RSS-Gen §4.7 The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate of carrier frequency), or from 30 MHz, whichever is the lowest frequency, to the 5th harmonic of the highest frequency generated without exceeding 40 GHz.

RSS-Gen §6 Receiver Spurious Emission Standard

If a radiated measurement is made, all spurious emissions shall comply with the limits of the following Table. The resolution bandwidth of the spectrum analyzer shall be 100 kHz for spurious emission measurements below 1.0 GHz and 1.0 MHz for measurements above 1.0 GHz

§15.209 (a) Limit Matrix

Frequency(MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP120, AP121 802.11a/b/g/n AP
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB23-A4D Rev A
Issue Date: 2nd June 2008
Page: 229 of 293

Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.7.2. Receiver Radiated Spurious Emissions (above 1 GHz)

Industry Canada RSS-Gen §4.8, §6


Test Procedure

Radiated emissions above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

All measurements on any frequency or frequencies over 1 MHz are based on the use of measurement instrumentation employing an average detector function. All measurements above 1 GHz were performed using a minimum resolution bandwidth of 1 MHz.

All Sectors of the EUT were tested simultaneously

Test Measurement Set up

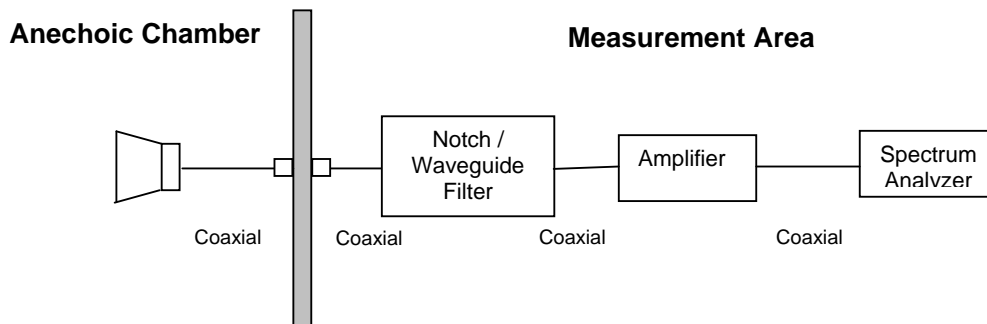

Measurement set up for Radiated Emission Test

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where: FS = Field Strength
R = Measured Spectrum analyzer Input Amplitude
AF = Antenna Factor
CORR = Correction Factor = CL – AG + NFL
CL = Cable Loss
AG = Amplifier Gain
FO = Distance Falloff Factor
NFL = Notch Filter Loss or Waveguide Loss