






ANKER TECHNOLOGY, INC.
MODEL: CC06810
CC06810
ANKER TECHNOLOGY, INC.
11550 WILLOW CREEK DRIVE
SUNNYVALE, CA 94086
TEL: 415 431-9700
WWW.ANKER.COM

PART NUMBER BLOCK	
PART NUMBER	REV
4011609	02

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
	RELEASE TO FILE		

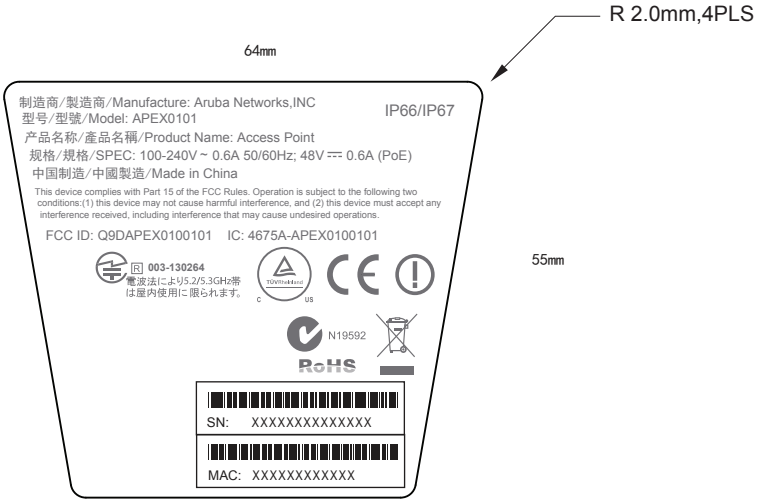


- NOTES:
- MATERIAL: SILVER MATT PET,T=0.05, BACKSIDE ADHESIVE MATERIAL
 - COLOR:
 - COLOR OF BASE: MATERIAL PRIMARY
 - COLOR OF FONT: BLACK
 - TEMPERATURE RESISTANT= 80°C.
 - ADHESIVE THICKNESS=0.024±0.003mm.
 - UL APPROVED INK & MATERIAL
 - REQUIREMENT FOR ADHESIVE GLUE: 3M-467

		UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE:							
		INTEGRAL DIMENSIONS 1 PLACE DECIMAL	± 0.5 ± 0.3	ANGULAR DIMENSIONS ± 2° HOLES UNDER φ 5.00	± 0.2				
		MATERIAL: SEE NOTES				LABEL,AGENCY,AP-274			
		FINISH: SEE NOTES							
		THIRD ANGLE PROJECTION	DRAWN			SIZE A4	DWG NO. 4011609	REV 02	
NEXT ASSY	USED ON		ENGR						SCALE
APPLICATION			APVD						

PART NUMBER BLOCK	
PART NUMBER	REV
4011596	02

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
	RELEASE TO FILE		

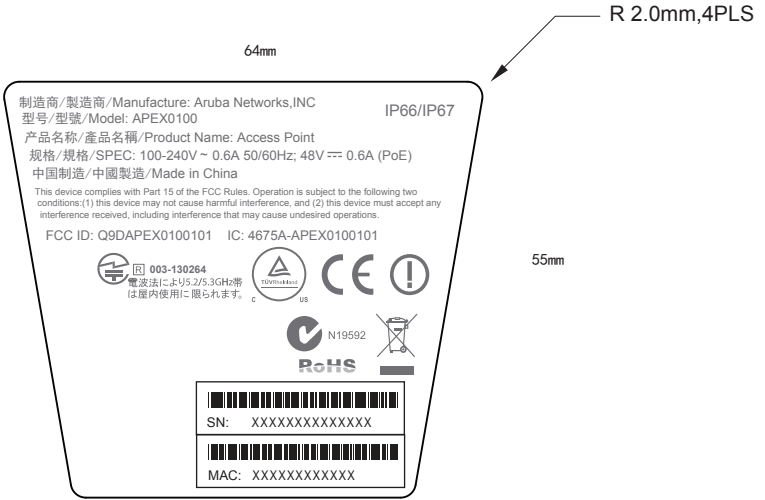

- NOTES:
- MATERIAL: SILVER MATT PET,T=0.05, BACKSIDE ADHESIVE MATERIAL
 - COLOR:
 - COLOR OF BASE: MATERIAL PRIMARY
 - COLOR OF FONT: BLACK
 - TEMPERATURE RESISTANT= 80°C.
 - ADHESIVE THICKNESS=0.024±0.003mm.
 - UL APPROVED INK & MATERIAL
 - REQUIREMENT FOR ADHESIVE GLUE: 3M-467

		UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE:				
		INTEGRAL DIMENSIONS ± 0.5 1 PLACE DECIMAL ± 0.3	ANGULAR DIMENSIONS ± 2° HOLES UNDER φ 5.00 ± 0.2			
		MATERIAL: SEE NOTES		LABEL,AGENCY,AP-275		
		FINISH: SEE NOTES		SIZE A4 DWG NO. 4011596 REV 02		
NEXT ASSY	USED ON	THIRD ANGLE PROJECTION	DRAWN	SCALE 1/1 SHEET 1 OF 1		
APPLICATION			ENGR			
			APVD			