




Annex G - Worse Case Data for Radiated Spurious Emission

Bluetooth Data Model: APEX0374

Site: AC1	Time: 2017/09/13 - 01:28
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by BLE at Channel 2402MHz	

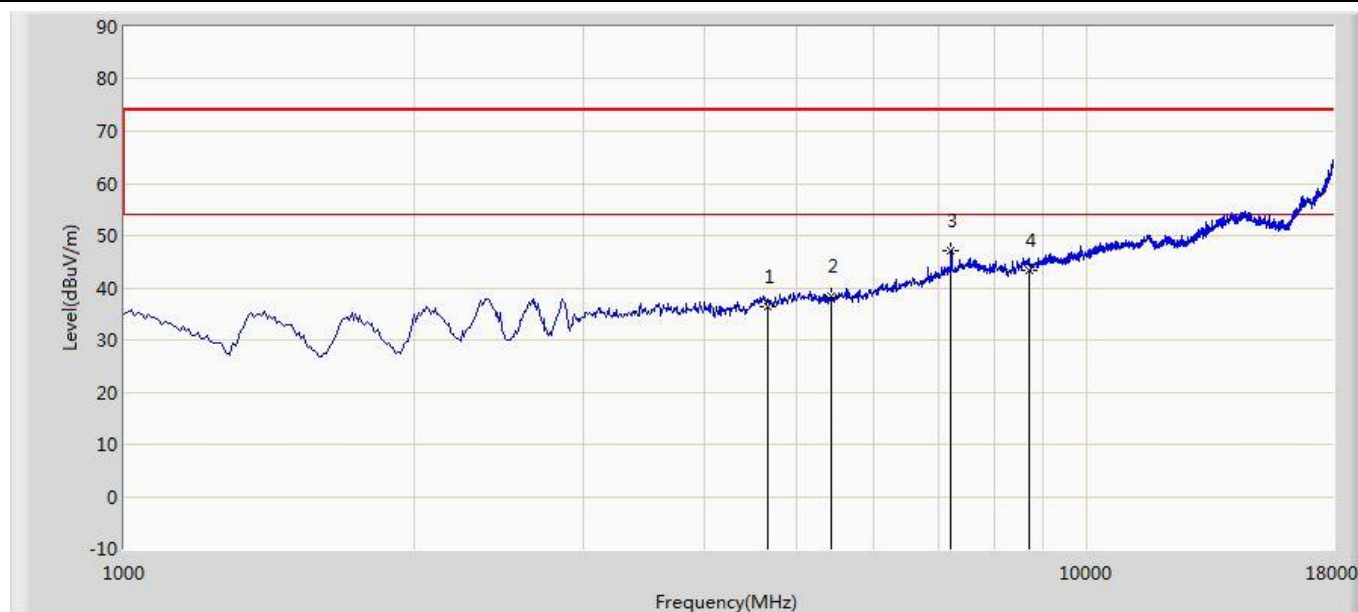


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			4655.000	36.500	33.094	-37.500	74.000	3.407	PK
2			5420.000	38.300	34.239	-35.700	74.000	4.061	PK
3		*	7205.000	47.000	34.900	-27.000	74.000	12.100	PK
4			8692.500	43.300	29.574	-30.700	74.000	13.726	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/13 - 01:28
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by BLE at Channel 2402MHz	

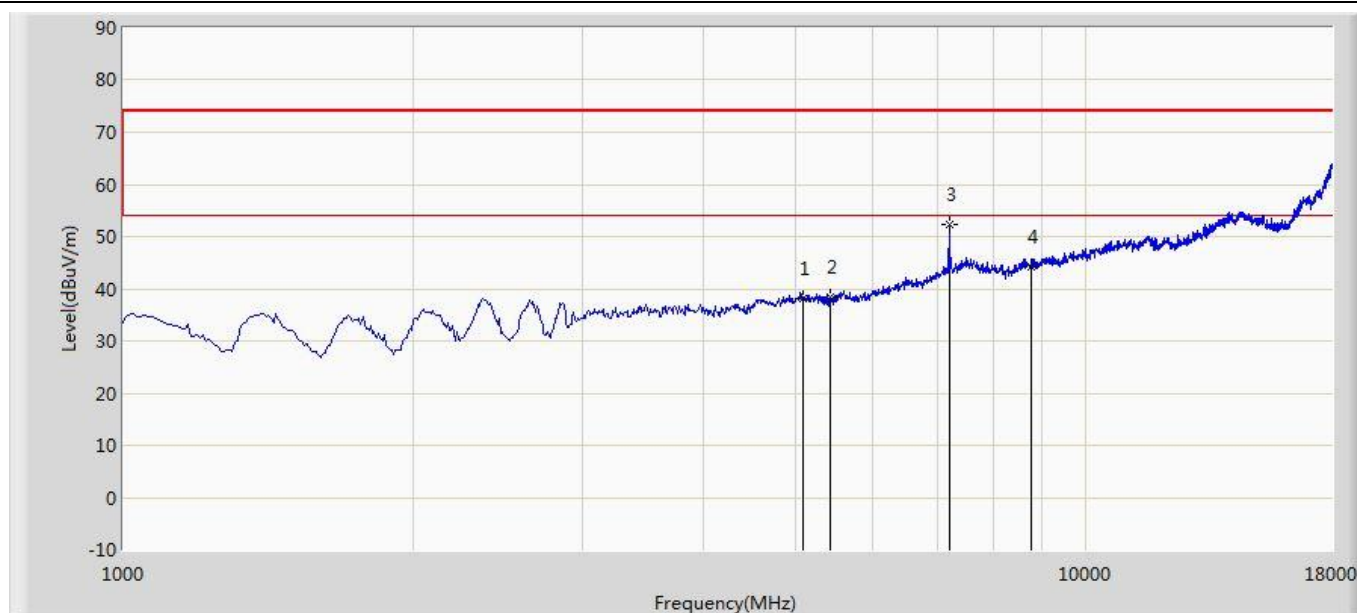

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5088.500	37.604	33.470	-36.396	74.000	4.134	PK
2			5420.000	38.081	34.020	-35.919	74.000	4.061	PK
3		*	7205.000	53.877	41.777	-20.123	74.000	12.100	PK
4			8769.000	43.147	29.223	-30.853	74.000	13.924	PK


Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)



Bluetooth Data Model: APEX0375

Site: AC1	Time: 2017/11/15 - 01:33
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by BLE at Channel 2480MHz	

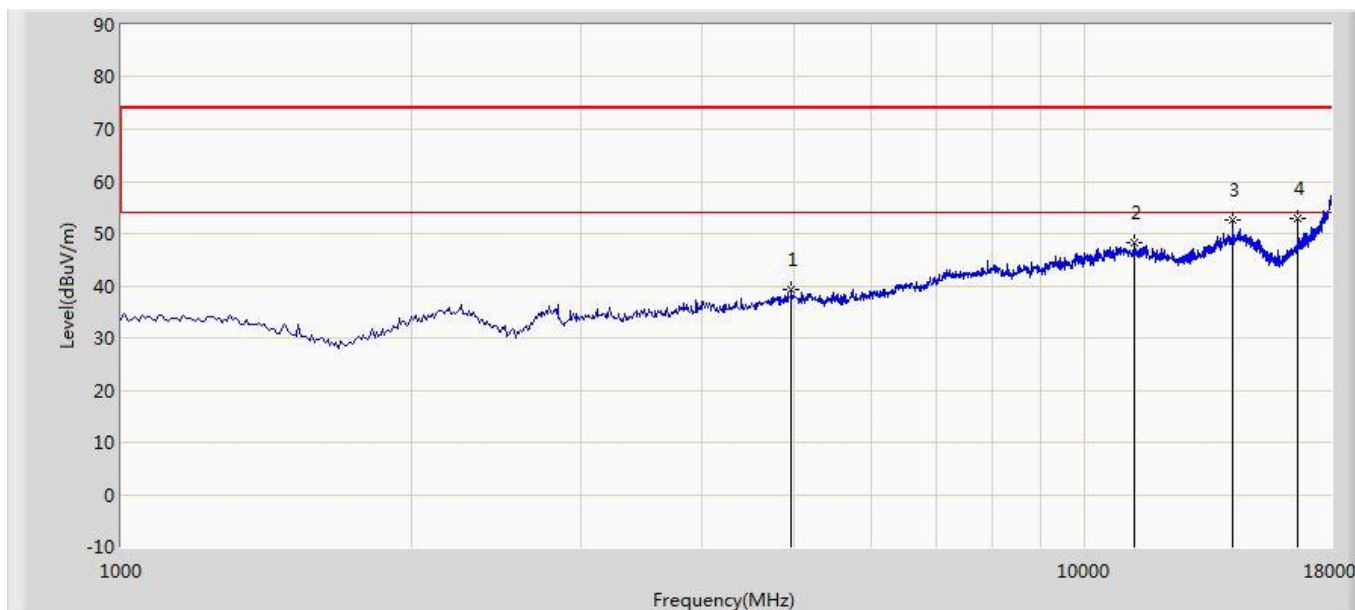


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			4961.000	39.200	36.496	-34.800	74.000	2.704	PK
2			11259.500	48.340	31.310	-25.680	74.000	17.030	PK
3			14226.000	52.710	31.390	-21.290	74.000	21.320	PK
4		*	16623.000	52.802	33.192	-21.198	74.000	19.610	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/11/15 - 01:33
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by BLE at Channel 2480MHz	

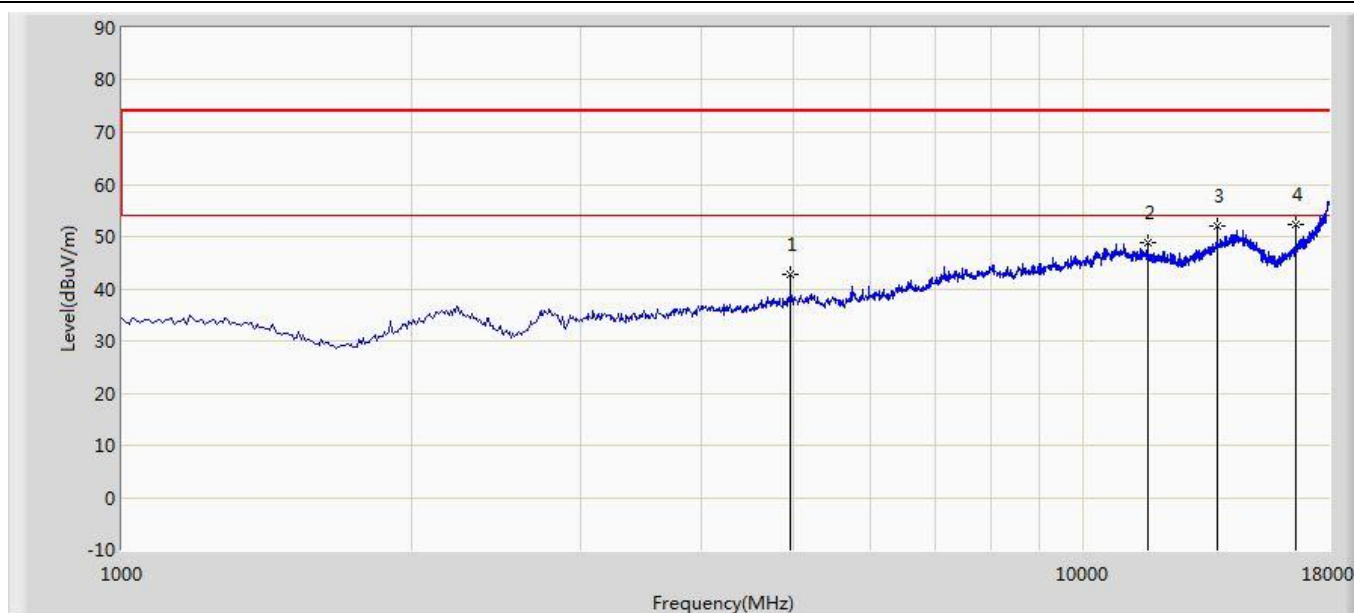

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			4961.040	42.701	39.997	-31.299	74.000	2.704	PK
2			11667.500	48.950	31.350	-25.050	74.000	17.600	PK
3			13767.000	52.040	31.940	-21.960	74.000	20.100	PK
4		*	16623.000	52.430	32.820	-21.570	74.000	19.610	PK


Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)



Bluetooth Data Model: APEX0377

Site: AC1	Time: 2017/09/13 - 01:45
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by BLE at Channel 2402MHz	

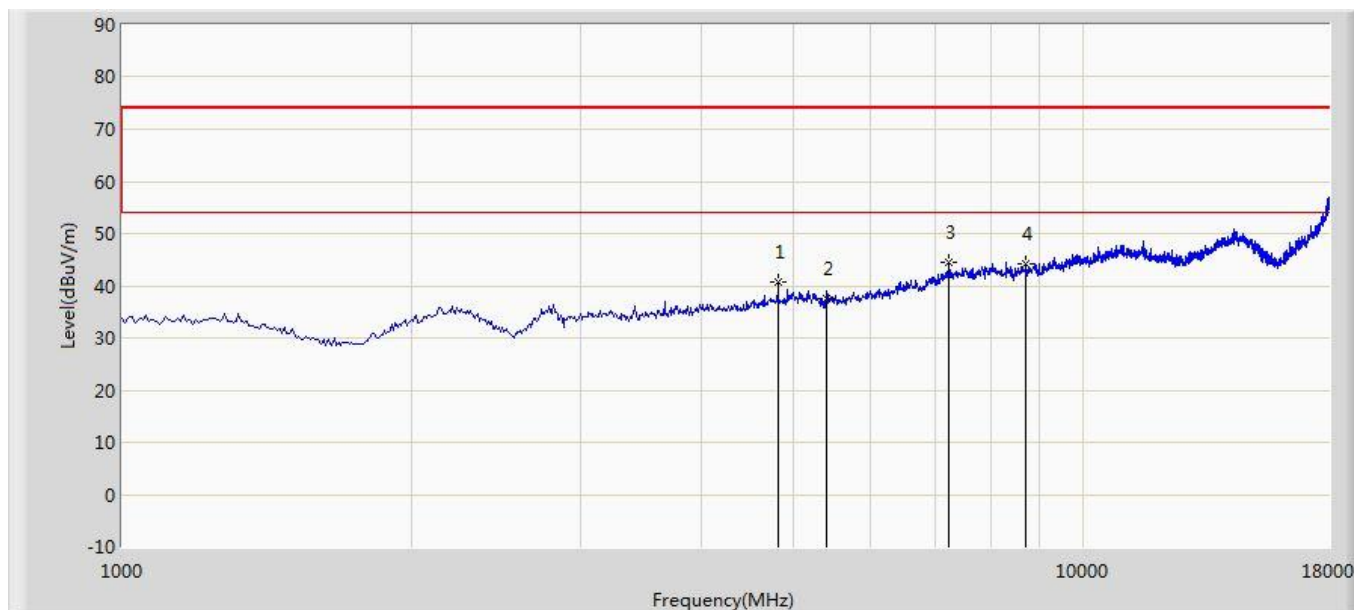


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			4808.000	40.583	36.903	-33.417	74.000	3.679	PK
2			5411.500	37.650	33.617	-36.350	74.000	4.034	PK
3		*	7239.000	44.520	32.324	-29.480	74.000	12.195	PK
4			8701.000	44.110	30.343	-29.890	74.000	13.767	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/13 - 01:45
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by BLE at Channel 2402MHz	

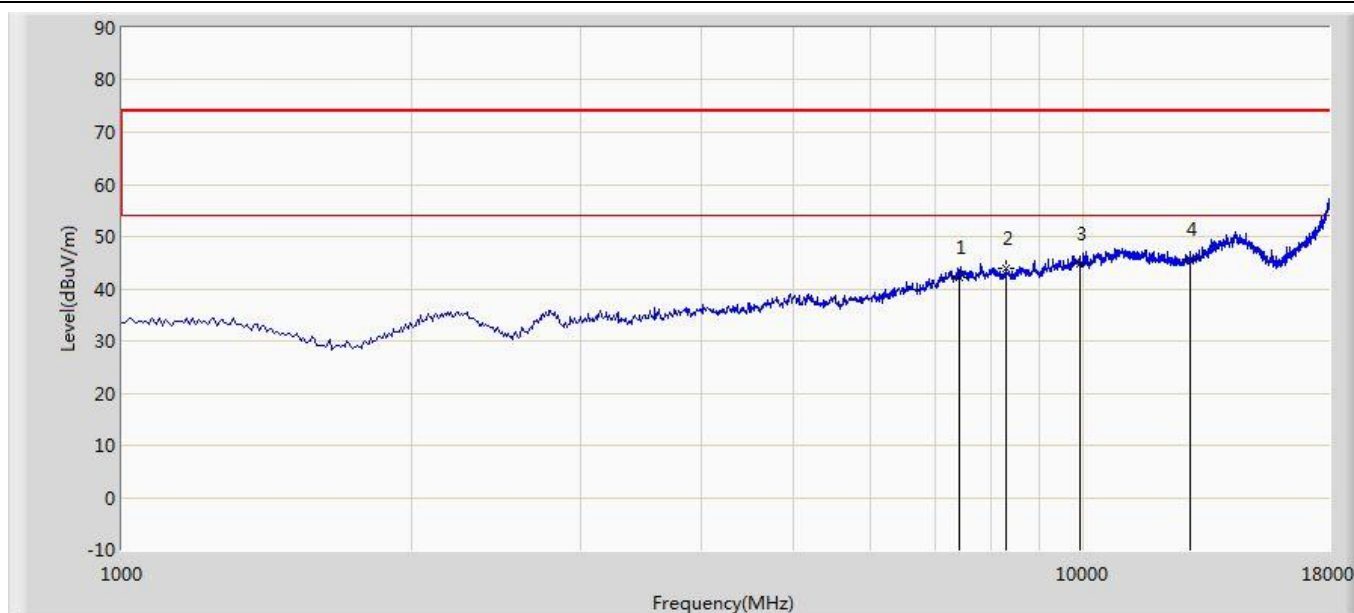

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7434.500	42.230	29.530	-31.770	74.000	12.700	PK
2			8310.000	42.910	30.993	-30.119	74.000	11.917	PK
3			9899.500	44.680	29.314	-29.320	74.000	15.366	PK
4		*	12891.500	45.520	26.096	-28.480	74.000	19.424	PK


Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)



2.4GHz Wi-Fi Model: APEX0374 - Omni Antenna (ANT-2x2-5005)

Site: AC1	Time: 2017/08/26 - 04:13
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11b at Channel 2412MHz Ant 0 + 1 (CDD Mode)	

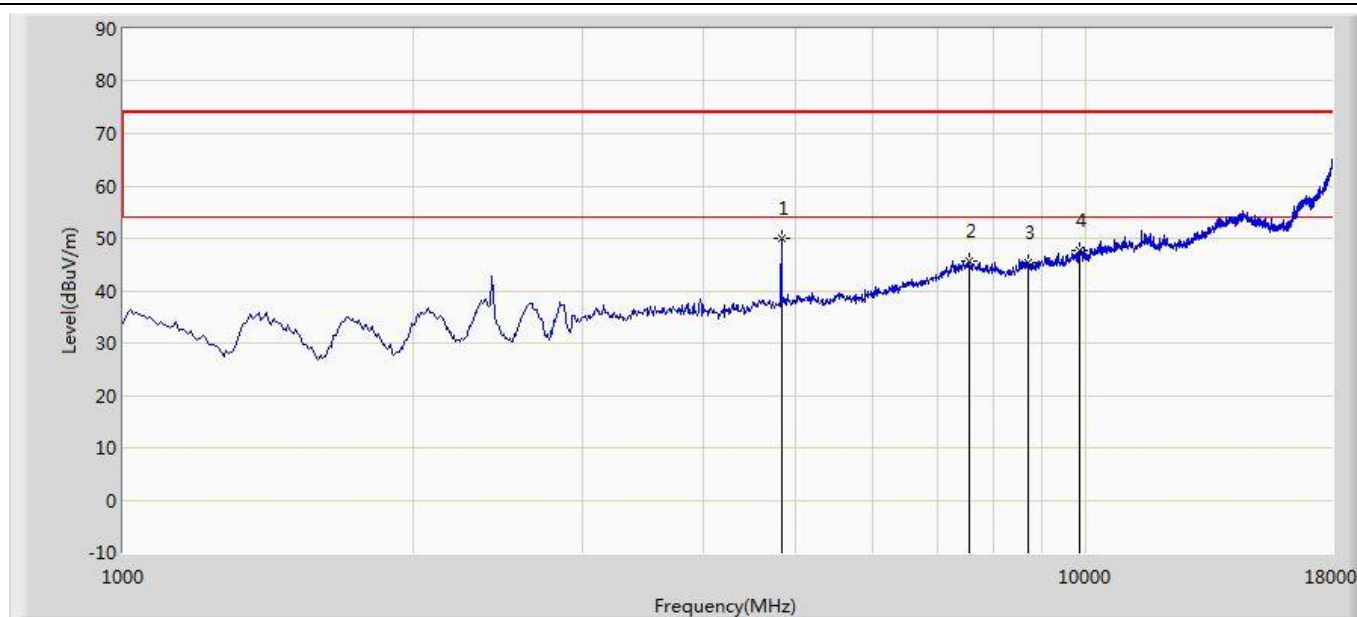


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	4825.000	50.006	46.332	-23.994	74.000	3.675	PK
2			7553.500	45.526	32.716	-28.474	74.000	12.810	PK
3			8701.000	45.380	31.623	-28.620	74.000	13.757	PK
4			9857.000	47.693	31.506	-26.307	74.000	16.187	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/26 - 04:22
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11b at Channel 2412MHz Ant 0 + 1 (CDD Mode)	

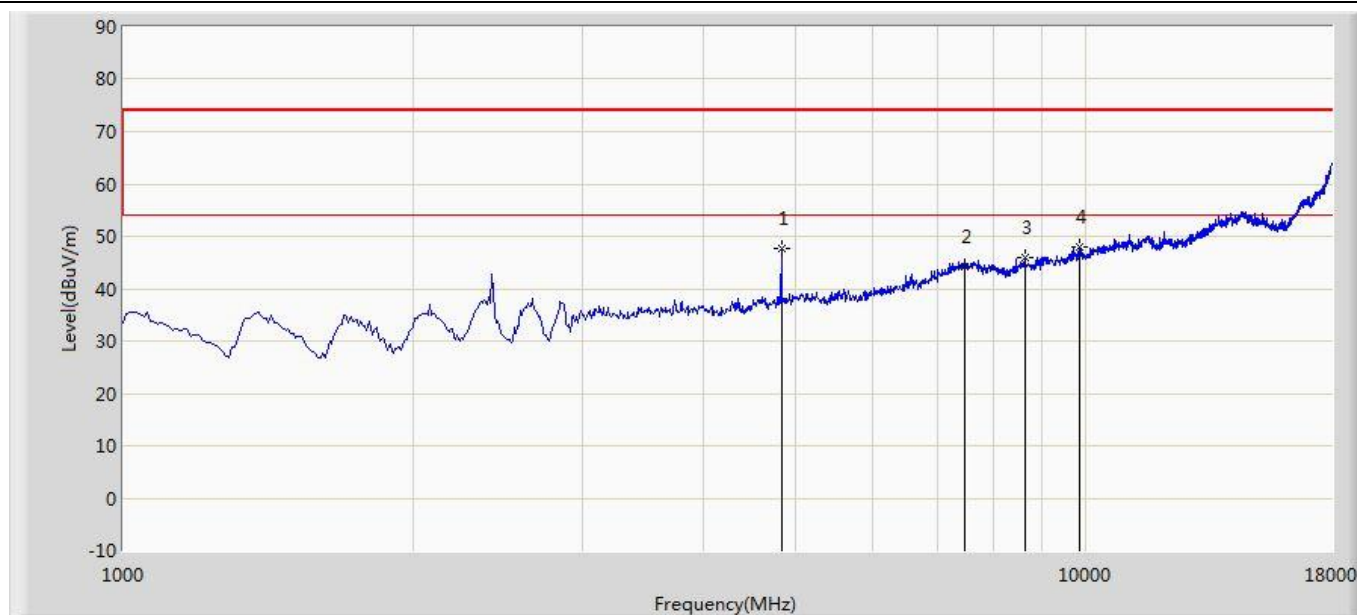

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			4825.000	47.615	43.941	-26.385	74.000	3.675	PK
2			7468.500	44.149	31.358	-29.851	74.000	12.791	PK
3			8633.000	45.999	32.475	-28.001	74.000	13.525	PK
4		*	9848.500	48.019	31.872	-25.981	74.000	16.148	PK


Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)



2.4GHz Wi-Fi Model: APEX0374 - Directional Antenna (ANT-2x2-2314)

Site: AC1	Time: 2017/08/26 - 08:06
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11b at Channel 2437MHz Ant 0 + 1 (CDD Mode)	

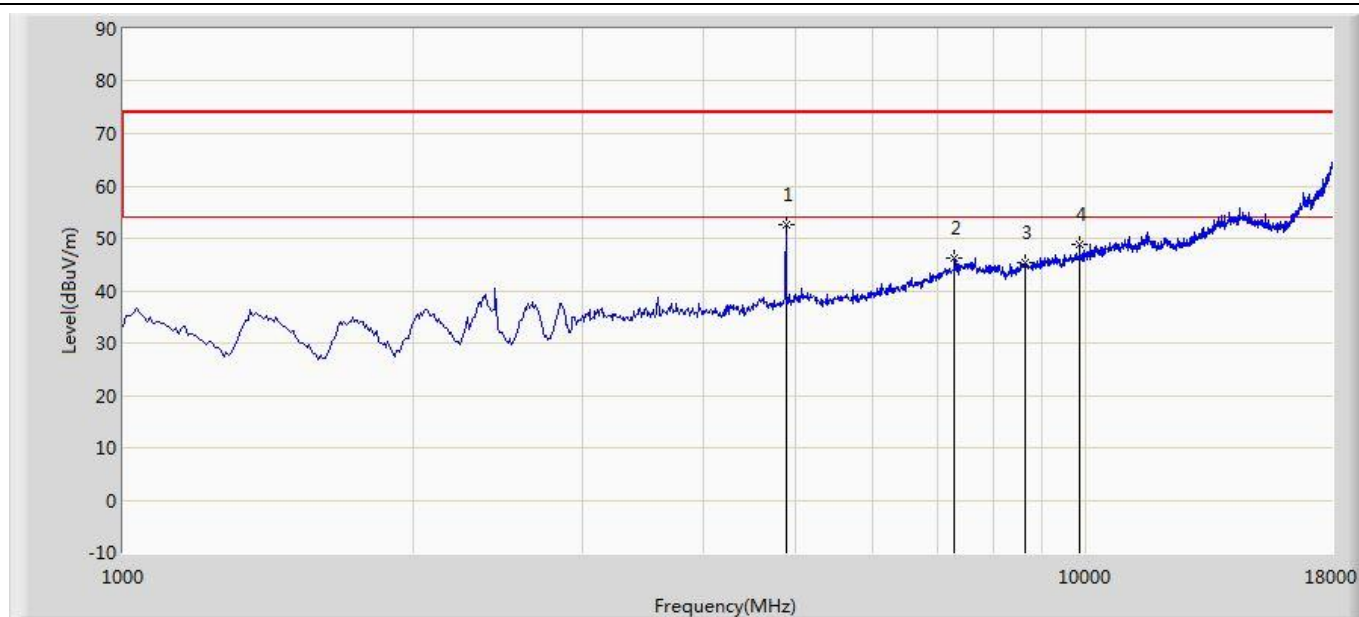


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	4876.000	52.714	49.054	-21.286	74.000	3.660	PK
2			7307.000	46.149	33.816	-27.851	74.000	12.332	PK
3			8633.000	45.240	31.716	-28.760	74.000	13.525	PK
4			9848.500	48.716	32.569	-25.284	74.000	16.148	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/26 - 08:07
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11b at Channel 2437MHz Ant 0 + 1 (CDD Mode)	

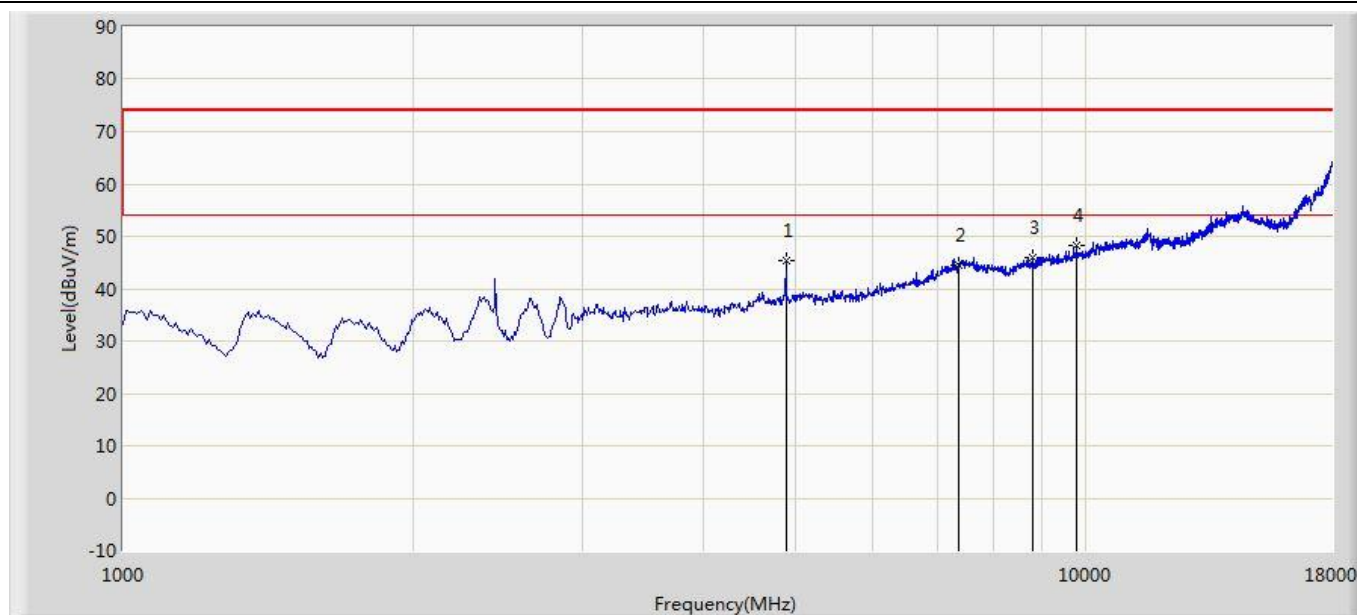


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			4876.000	45.420	41.760	-28.580	74.000	3.660	PK
2			7383.500	44.512	31.987	-29.488	74.000	12.525	PK
3			8811.500	45.896	31.924	-28.104	74.000	13.972	PK
4		*	9772.000	48.233	33.334	-25.767	74.000	14.899	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

2.4GHz Wi-Fi Model: APEX0375

Site: AC1	Time: 2017/09/12 - 22:54
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Ant 0 + 1 (Beam-Forming Mode)	

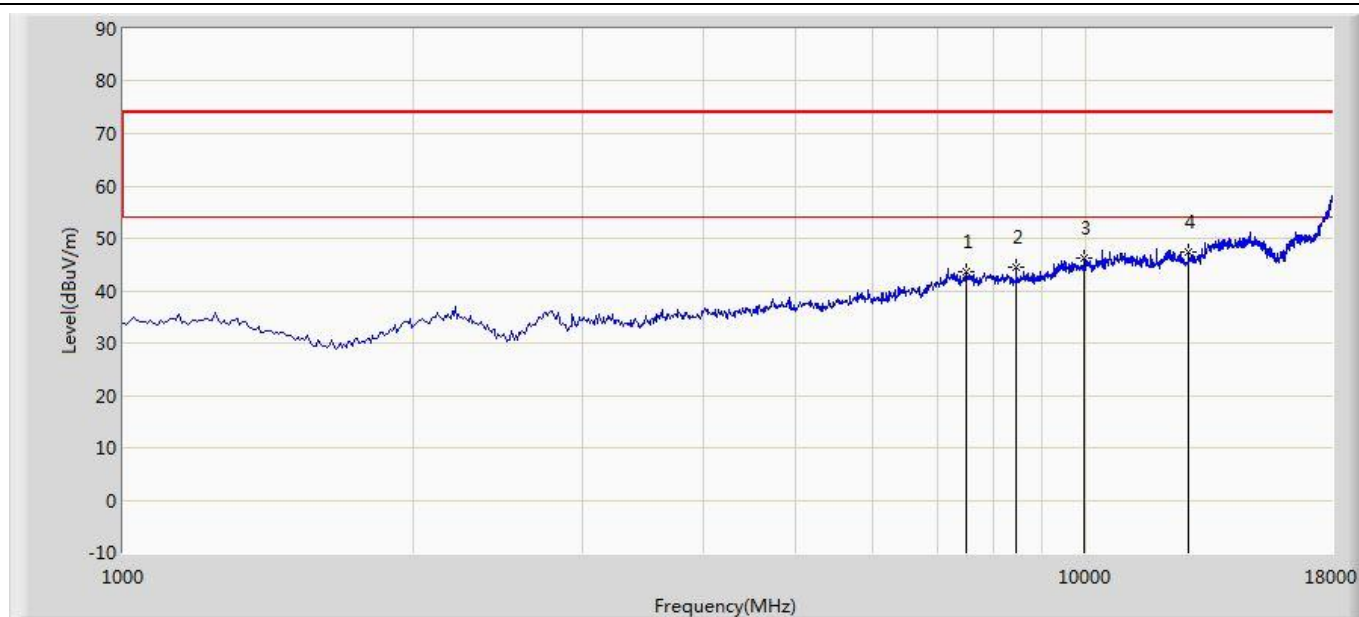


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7519.500	43.703	30.859	-30.297	74.000	12.844	PK
2			8463.000	44.371	31.792	-29.629	74.000	12.579	PK
3			9959.000	46.243	30.909	-27.757	74.000	15.334	PK
4		*	12772.500	47.389	28.401	-26.611	74.000	18.987	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/12 - 22:56
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Ant 0 + 1 (Beam-Forming Mode)	

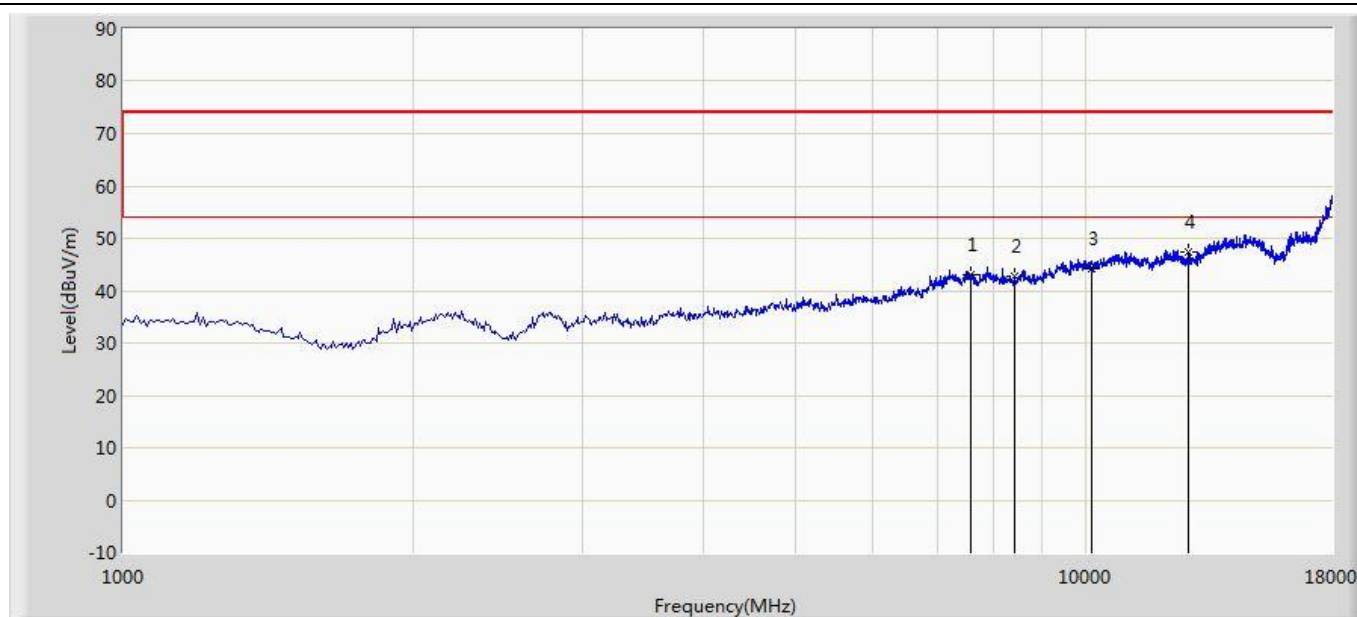

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7579.000	43.174	30.433	-30.826	74.000	12.741	PK
2			8420.500	42.874	30.560	-31.126	74.000	12.313	PK
3			10120.500	44.222	28.392	-29.778	74.000	15.829	PK
4		*	12772.500	47.389	28.401	-26.611	74.000	18.987	PK


Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)



2.4GHz Wi-Fi Model: APEX0377

Site: AC1	Time: 2017/09/02 - 15:43
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11b at Channel 2437MHz Ant 0 + 1 (CDD Mode)	

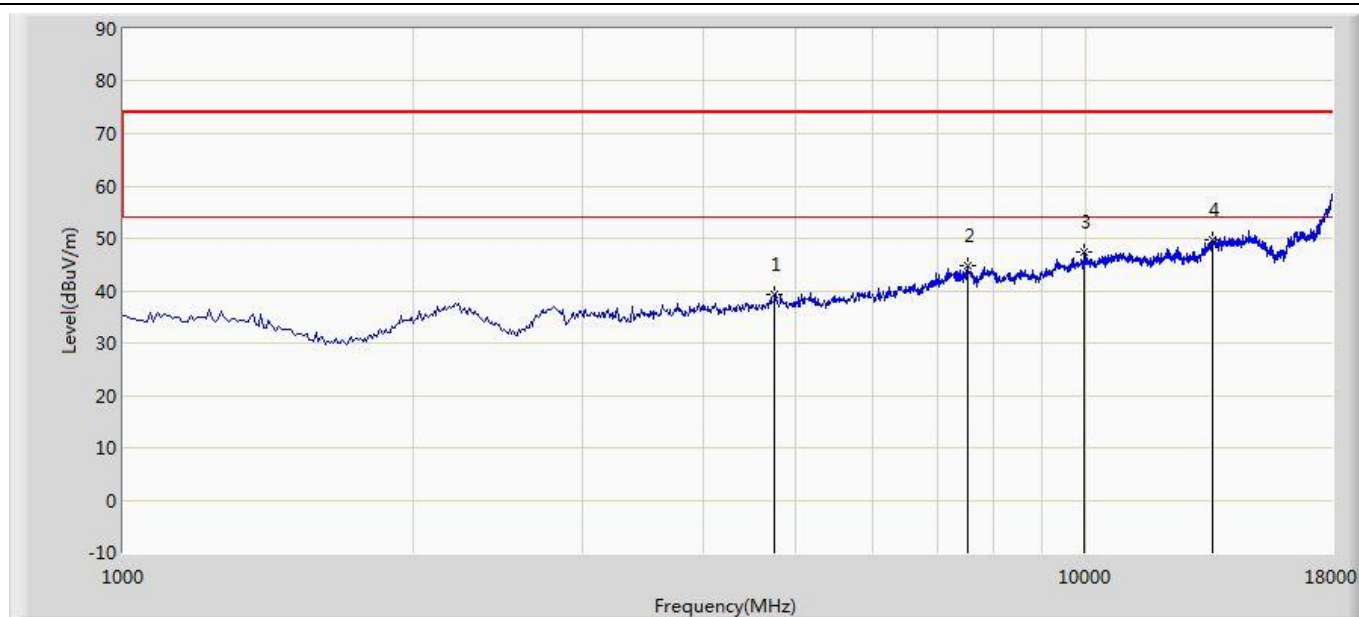


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			4748.500	39.230	35.577	-34.770	74.000	3.653	PK
2			7528.000	44.843	32.004	-29.157	74.000	12.839	PK
3			9967.500	47.401	32.059	-26.599	74.000	15.342	PK
4		*	13529.000	49.587	27.766	-24.413	74.000	21.821	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/02 - 15:44
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11b at Channel 2437MHz Ant 0 + 1 (CDD Mode)	

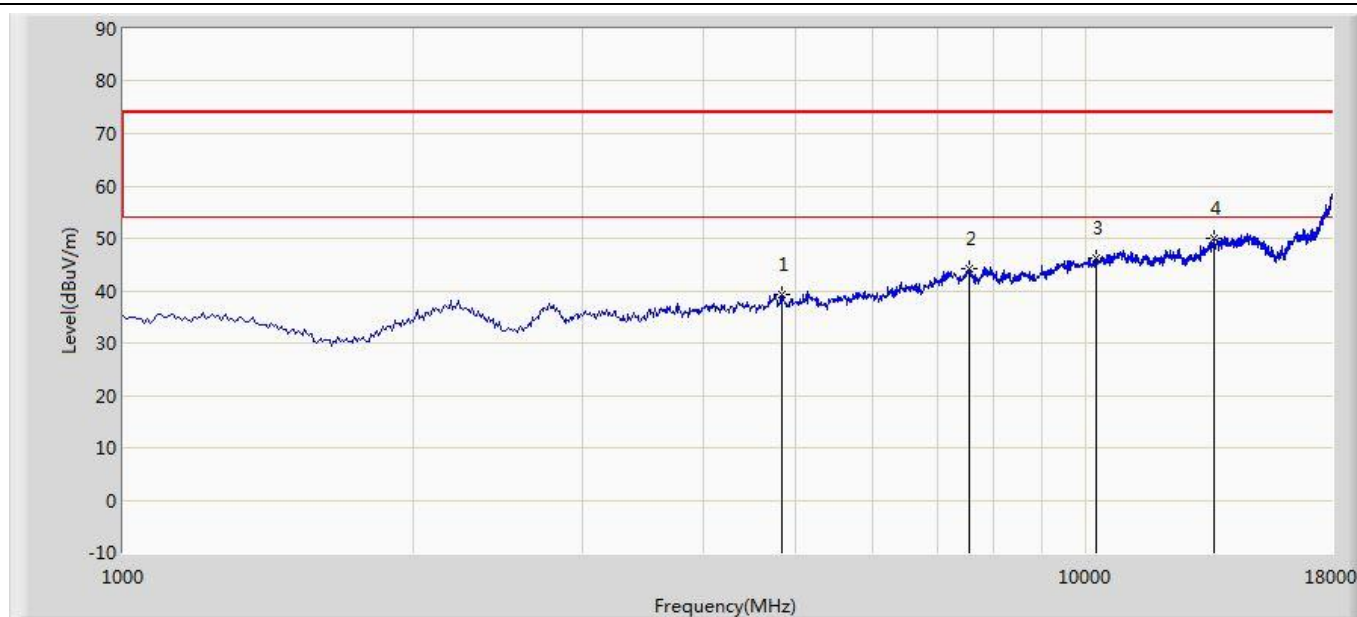

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			4825.000	39.251	35.577	-34.749	74.000	3.675	PK
2			7562.000	44.170	31.380	-29.830	74.000	12.791	PK
3			10248.000	46.111	29.670	-27.889	74.000	16.442	PK
4		*	13588.500	49.942	28.137	-24.058	74.000	21.805	PK


Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)



5GHz Wi-Fi Model: APEX0374 - Omni Antenna (ANT-2x2-5005)

Site: AC1	Time: 2017/09/17 - 13:37
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit 802.11a at Channel 5220MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

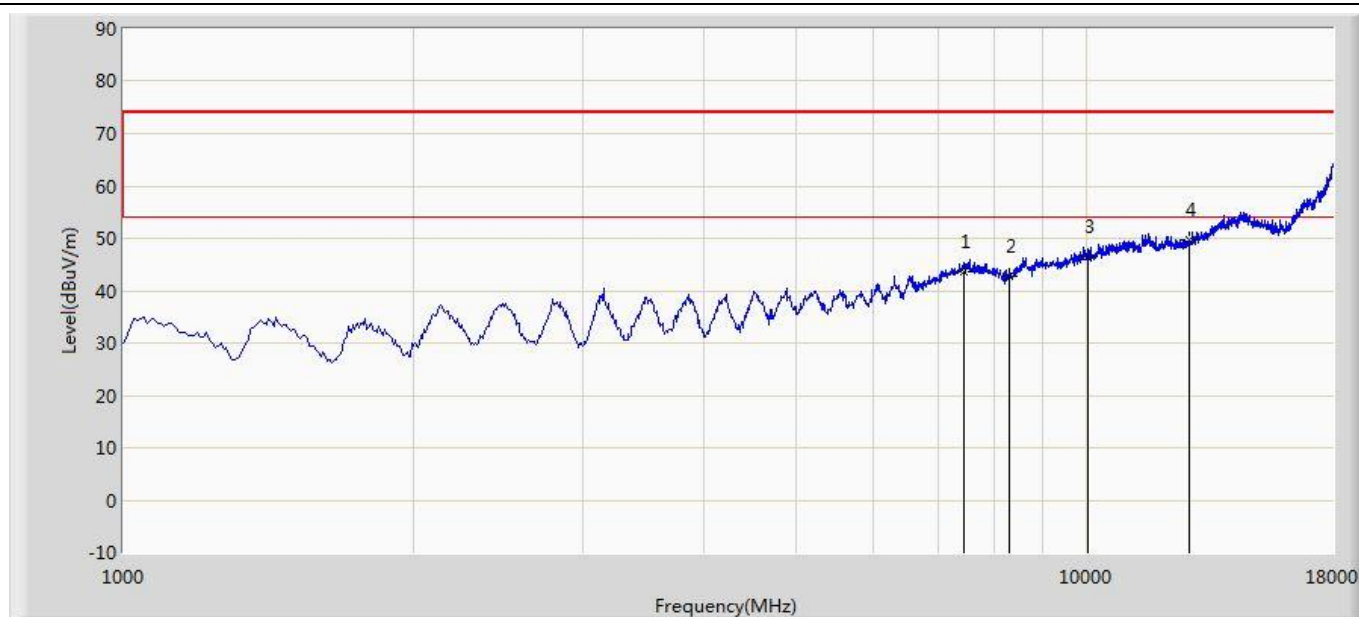


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7460.000	43.566	30.792	-30.434	74.000	12.774	PK
2			8318.500	42.698	30.770	-31.302	74.000	11.928	PK
3			10035.500	46.634	31.164	-27.366	74.000	15.471	PK
4		*	12781.000	49.644	30.626	-24.356	74.000	19.019	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/17 - 13:39
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit 802.11a at Channel 5220MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

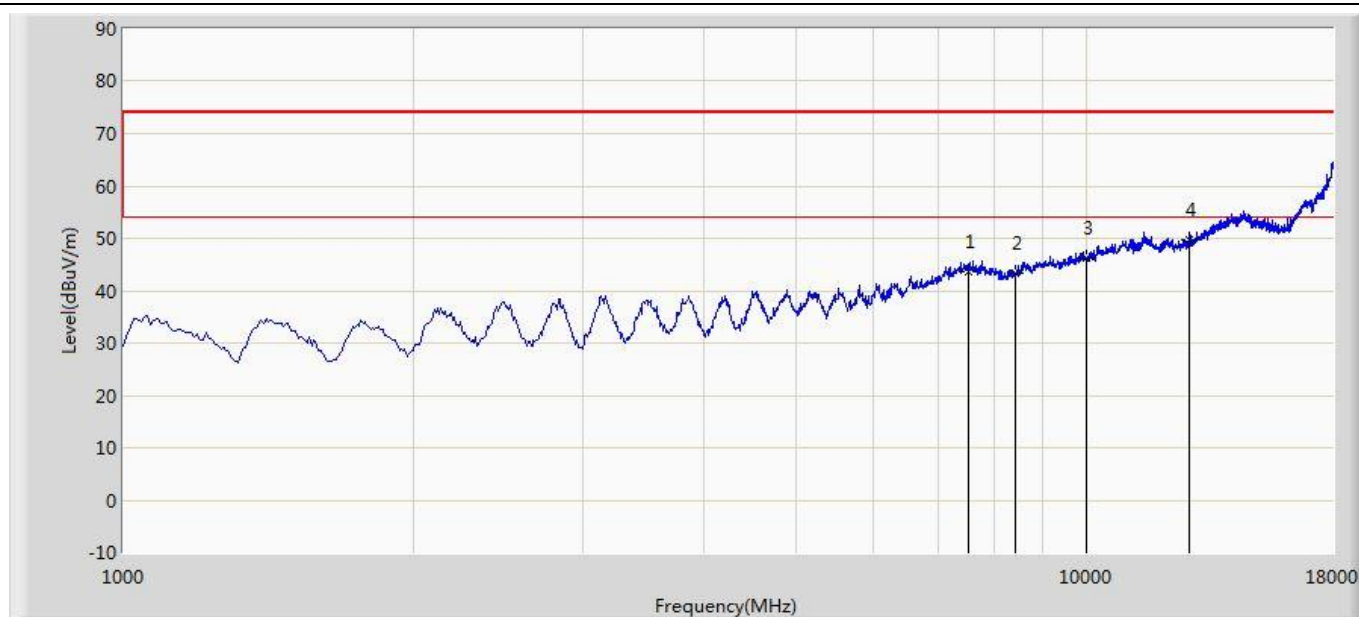


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7536.500	43.515	30.681	-30.485	74.000	12.834	PK
2			8429.000	43.304	30.939	-30.696	74.000	12.365	PK
3			9993.000	46.237	30.873	-27.763	74.000	15.364	PK
4		*	12781.000	49.644	30.626	-24.356	74.000	19.019	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/17 - 13:49
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit 802.11n-HT20 at Channel 5240MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

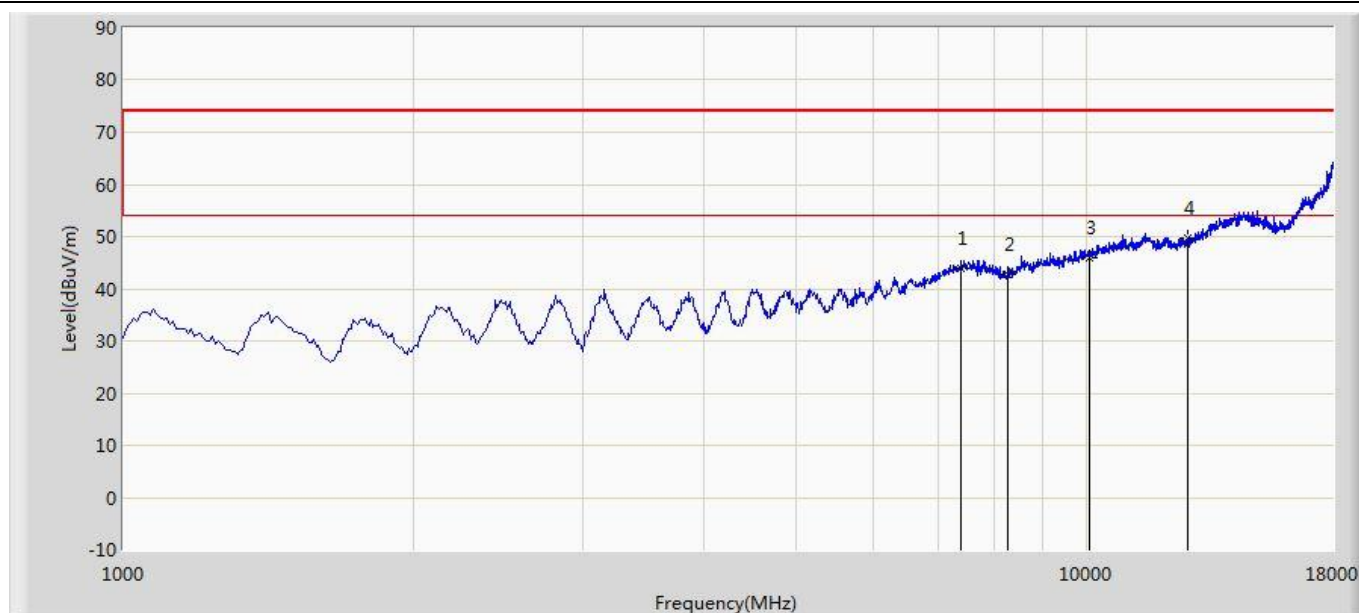


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7409.000	44.033	31.421	-29.967	74.000	12.612	PK
2			8284.500	42.809	30.917	-31.191	74.000	11.893	PK
3			10061.000	45.843	30.286	-28.157	74.000	15.557	PK
4		*	12721.500	49.828	31.010	-24.172	74.000	18.818	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/17 - 13:50
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit 802.11n-HT20 at Channel 5240MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

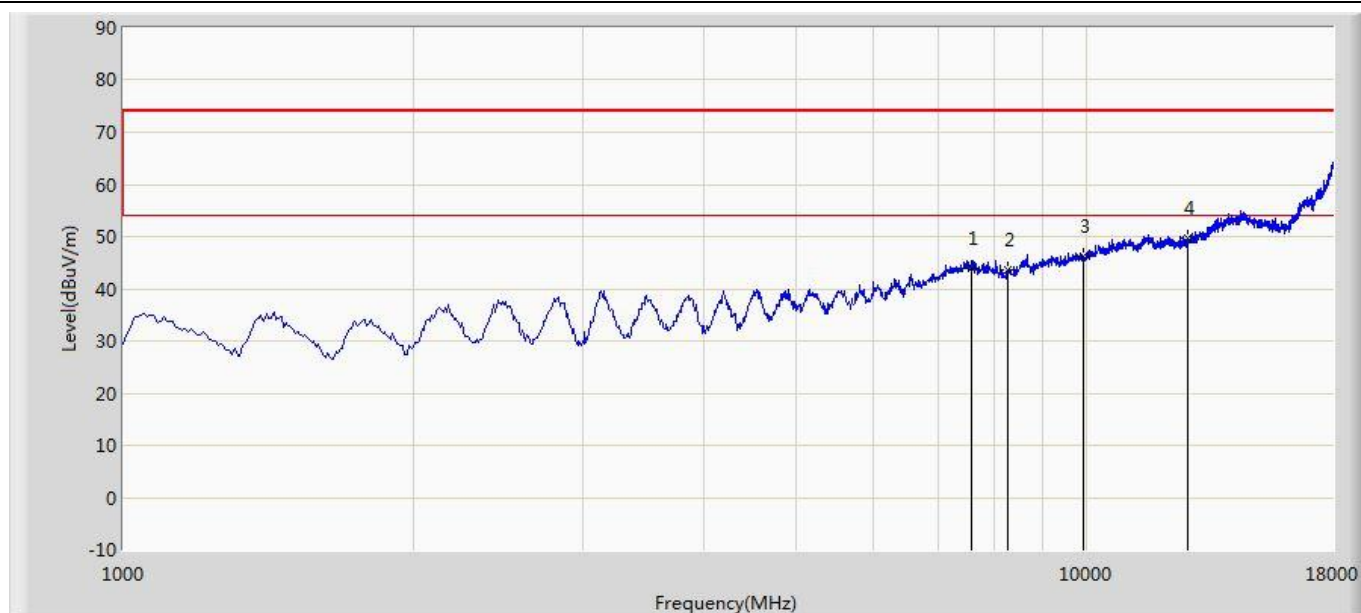


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7579.000	44.028	31.287	-29.972	74.000	12.741	PK
2			8267.500	43.592	31.715	-30.408	74.000	11.877	PK
3			9899.500	46.259	30.893	-27.741	74.000	15.366	PK
4		*	12721.500	49.828	31.010	-24.172	74.000	18.818	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/17 - 13:51
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit 802.11n-HT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

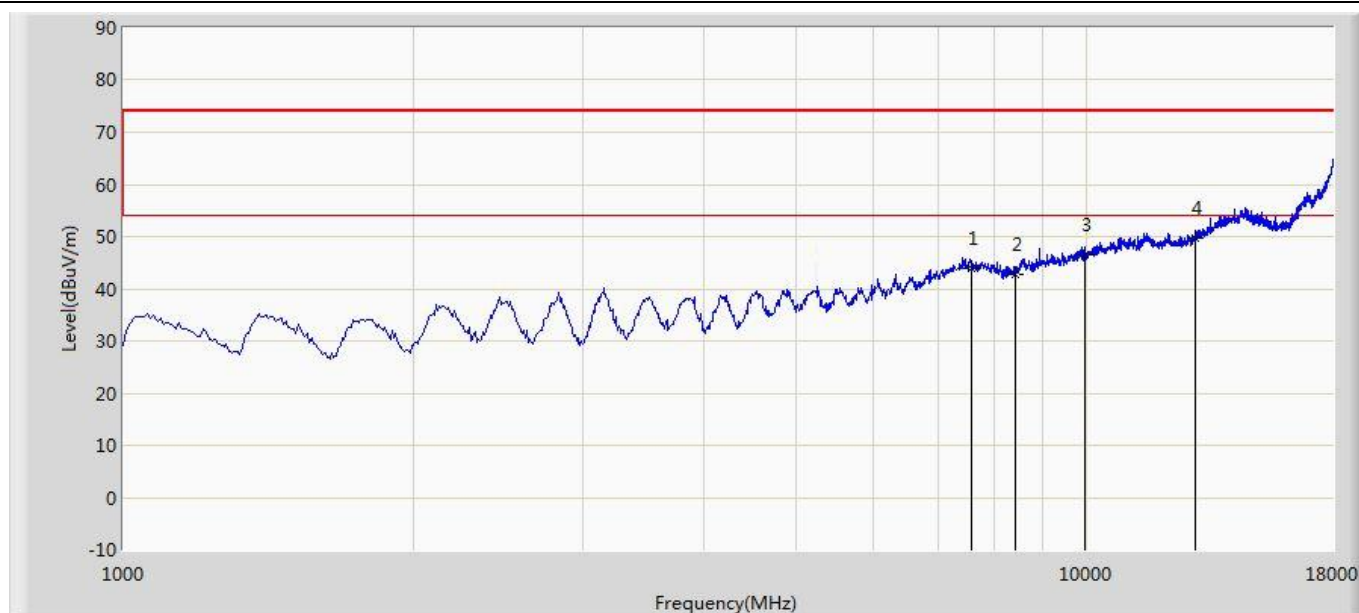


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7579.000	44.028	31.287	-29.972	74.000	12.741	PK
2			8429.000	42.809	30.444	-31.191	74.000	12.365	PK
3			9942.000	46.475	31.159	-27.525	74.000	15.316	PK
4		*	12951.000	49.566	29.844	-24.434	74.000	19.722	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/17 - 13:53
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit 802.11n-HT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

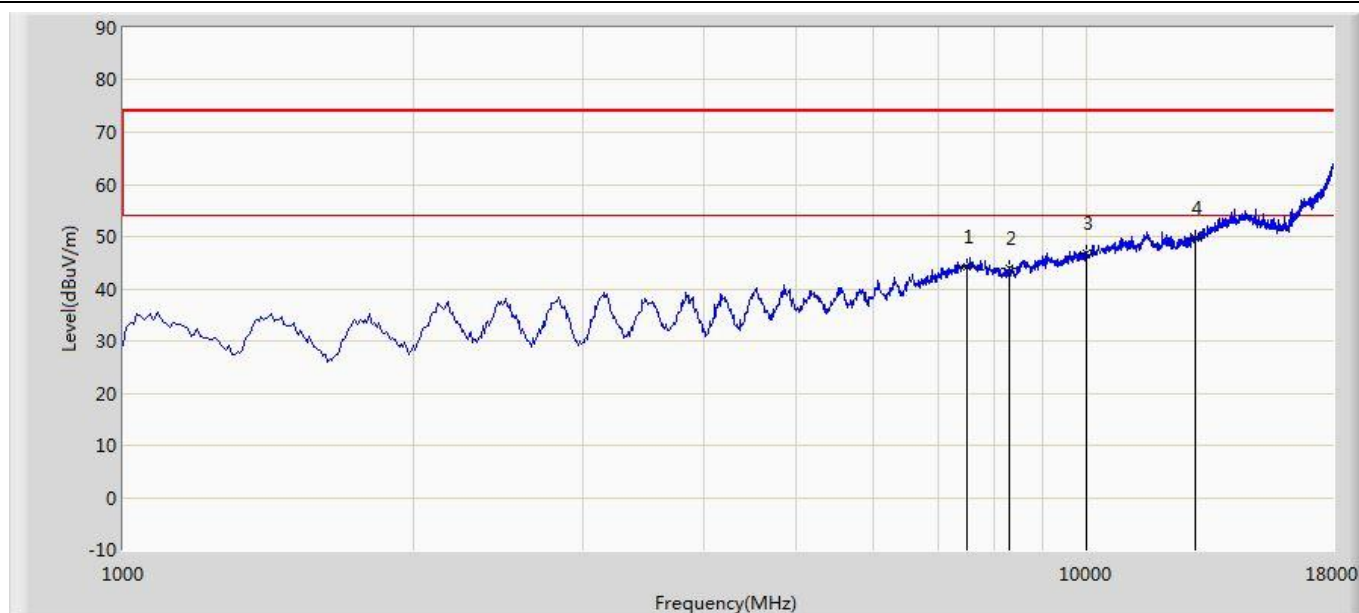


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7519.500	44.335	31.491	-29.665	74.000	12.844	PK
2			8293.000	43.975	32.076	-30.025	74.000	11.899	PK
3			9993.000	46.849	31.485	-27.151	74.000	15.364	PK
4		*	12951.000	49.566	29.844	-24.434	74.000	19.722	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/17 - 14:00
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit 802.11ac-VHT20 at Channel 5220MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

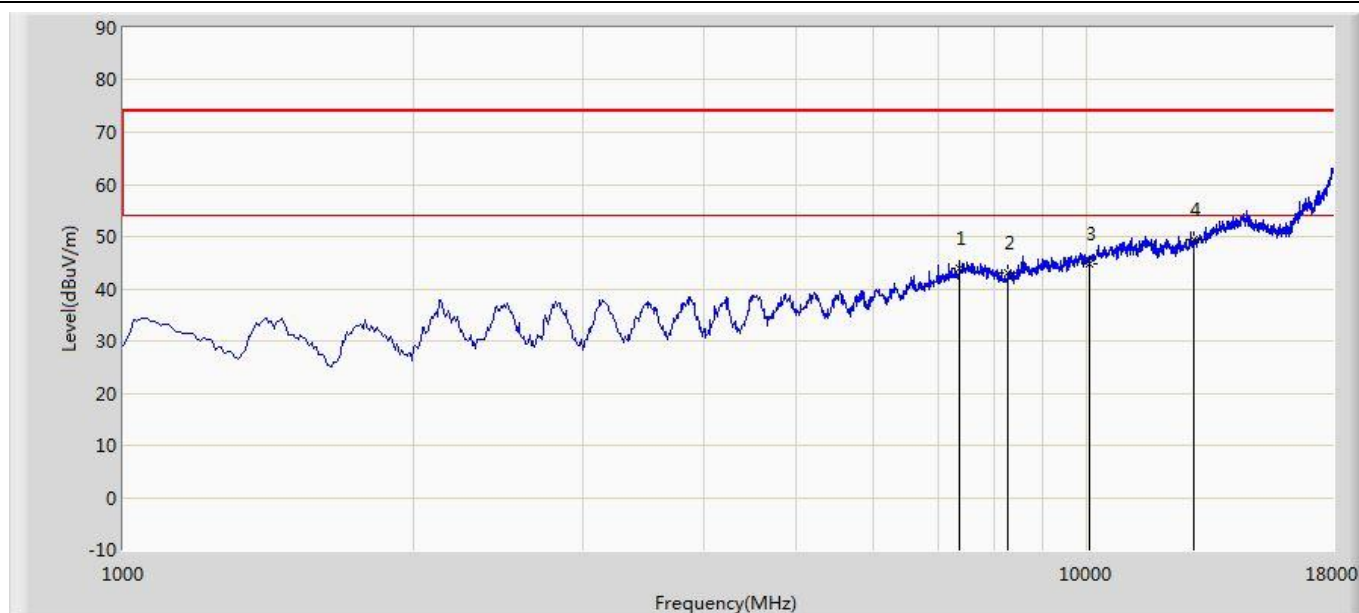


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7366.500	43.841	31.374	-30.159	74.000	12.467	PK
2			8276.000	43.002	31.117	-30.998	74.000	11.885	PK
3			10052.500	44.763	29.238	-29.237	74.000	15.525	PK
4		*	12891.500	49.365	29.941	-24.635	74.000	19.424	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/17 - 14:01
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit 802.11ac-VHT20 at Channel 5220MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

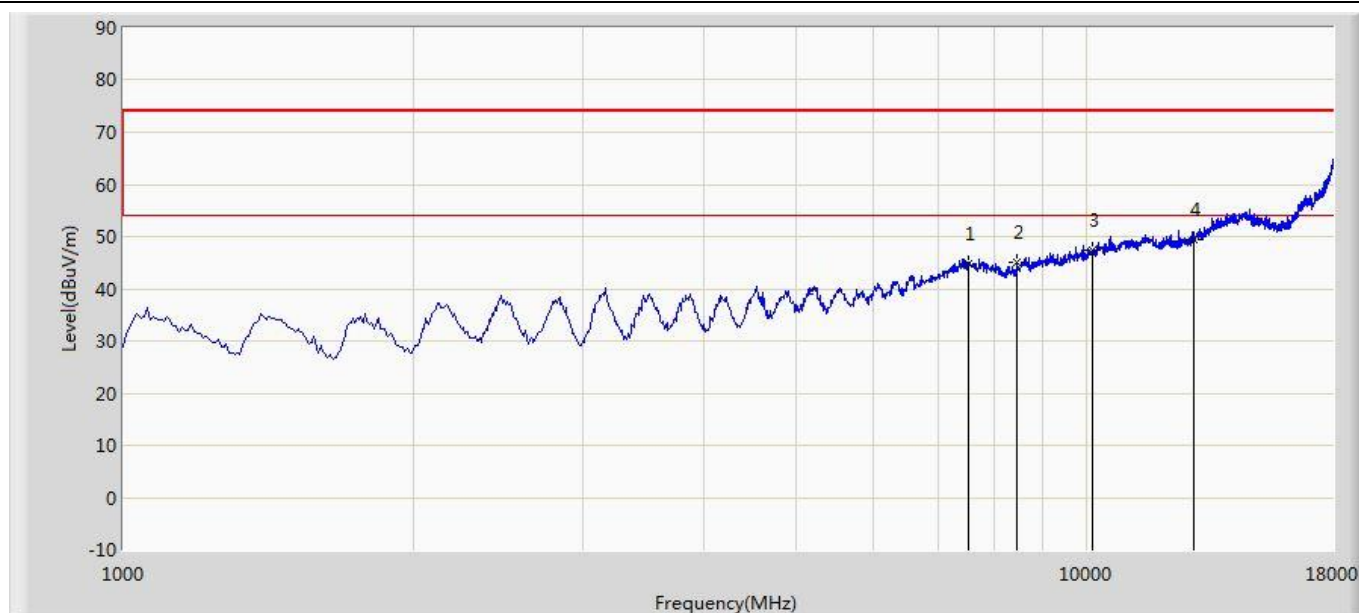


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7536.500	44.729	31.895	-29.271	74.000	12.834	PK
2			8463.000	44.932	32.353	-29.068	74.000	12.579	PK
3			10137.500	47.417	31.499	-26.583	74.000	15.918	PK
4		*	12891.500	49.365	29.941	-24.635	74.000	19.424	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/17 - 14:09
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit 802.11ac-VHT40 at Channel 5230MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

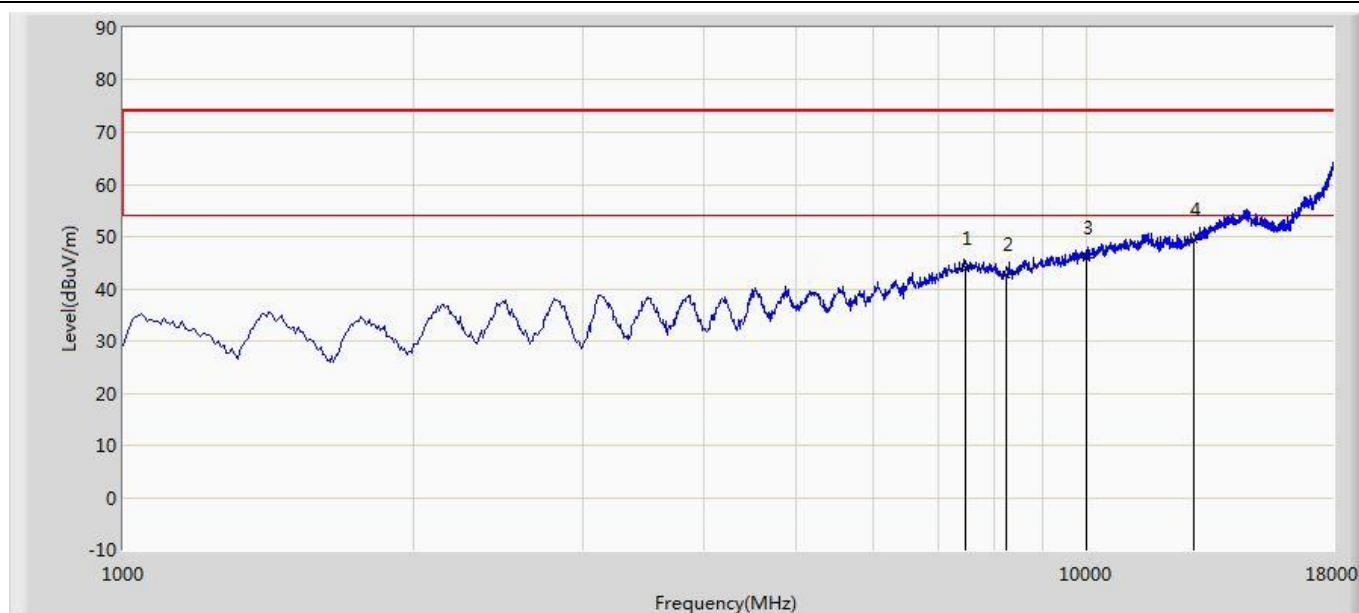


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7468.500	44.031	31.240	-29.969	74.000	12.791	PK
2			8242.000	42.620	30.745	-31.380	74.000	11.875	PK
3			9993.000	45.998	30.634	-28.002	74.000	15.364	PK
4		*	12891.500	49.344	29.920	-24.656	74.000	19.424	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/17 - 14:10
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit 802.11ac-VHT40 at Channel 5230MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

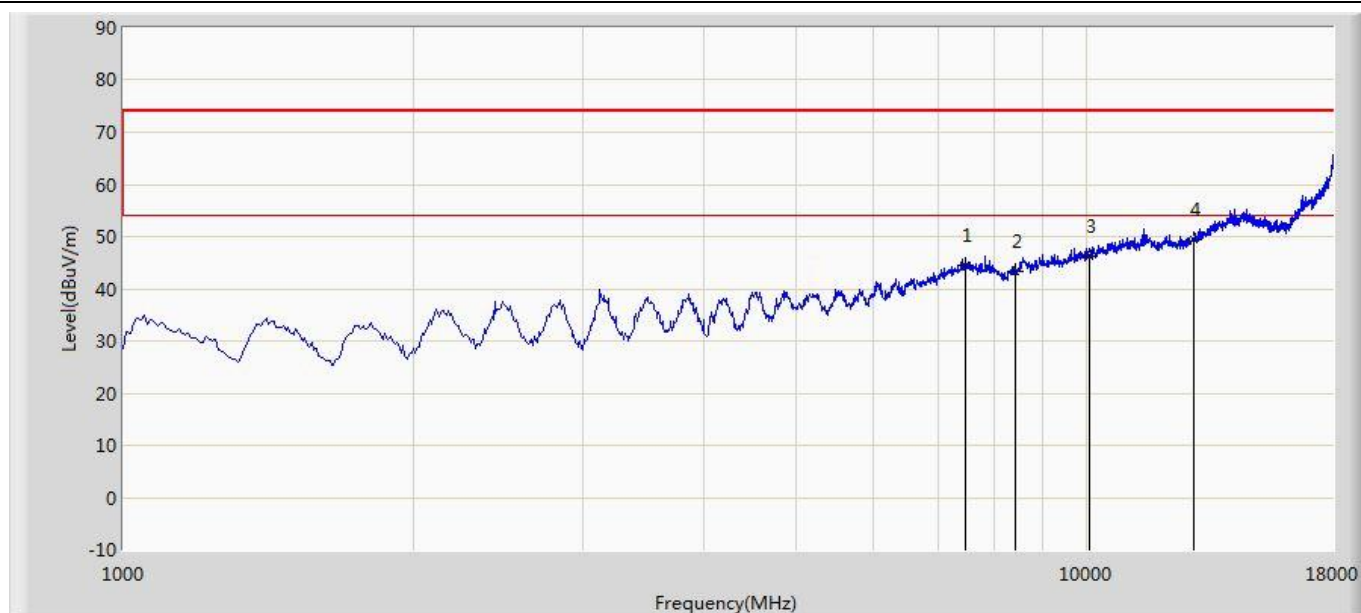


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7468.500	44.501	31.710	-29.499	74.000	12.791	PK
2			8429.000	43.210	30.845	-30.790	74.000	12.365	PK
3			10078.000	46.181	30.551	-27.819	74.000	15.630	PK
4		*	12891.500	49.344	29.920	-24.656	74.000	19.424	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/17 - 14:11
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

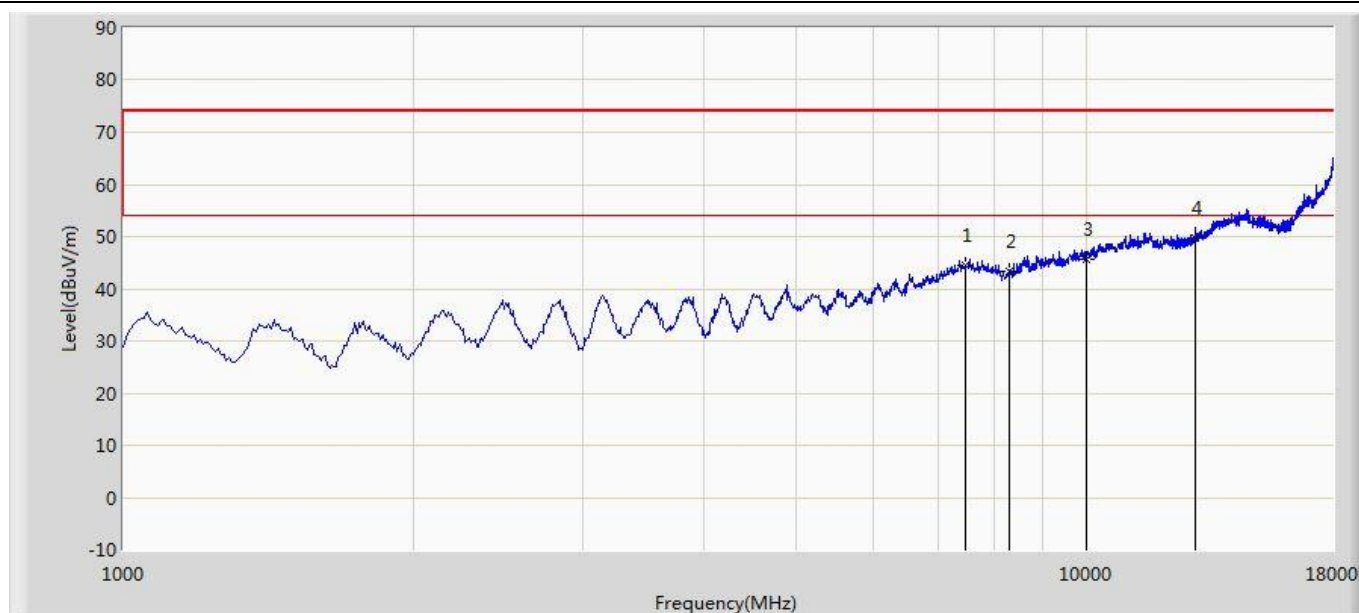


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7468.500	44.501	31.710	-29.499	74.000	12.791	PK
2			8310.000	43.420	31.503	-30.580	74.000	11.917	PK
3			9993.000	45.768	30.404	-28.232	74.000	15.364	PK
4		*	12951.000	49.706	29.984	-24.294	74.000	19.722	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/17 - 14:13
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

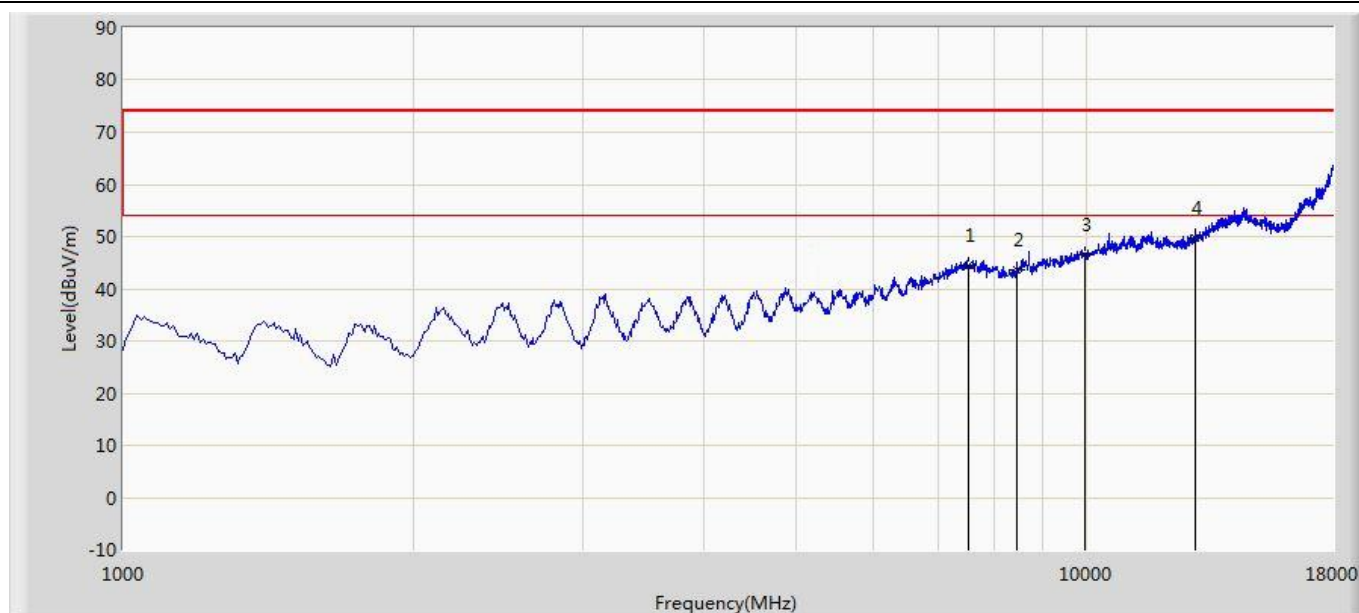


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7536.500	44.350	31.516	-29.650	74.000	12.834	PK
2			8463.000	43.710	31.131	-30.290	74.000	12.579	PK
3			9942.000	46.480	31.164	-27.520	74.000	15.316	PK
4		*	12951.000	49.706	29.984	-24.294	74.000	19.722	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 18:18
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

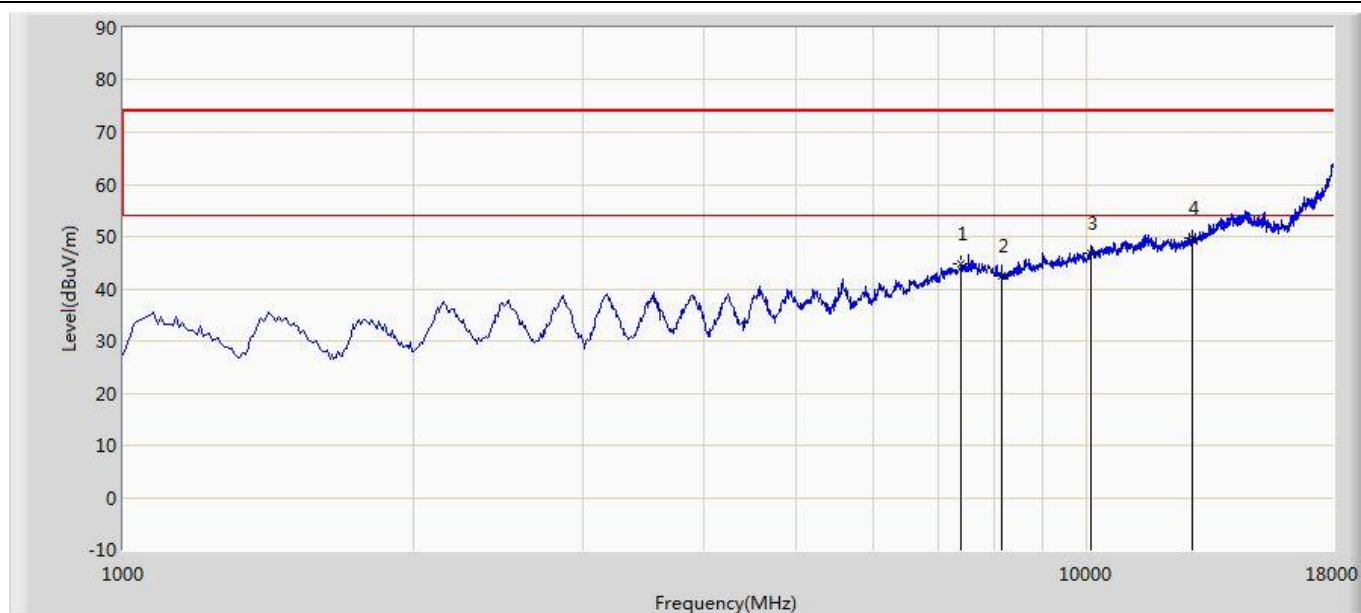


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7409.000	44.871	32.259	-29.129	74.000	12.612	PK
2			8165.500	42.446	30.384	-31.554	74.000	12.062	PK
3			10095.000	46.865	31.164	-27.135	74.000	15.701	PK
4		*	12840.500	49.851	30.645	-24.149	74.000	19.206	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 18:22
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

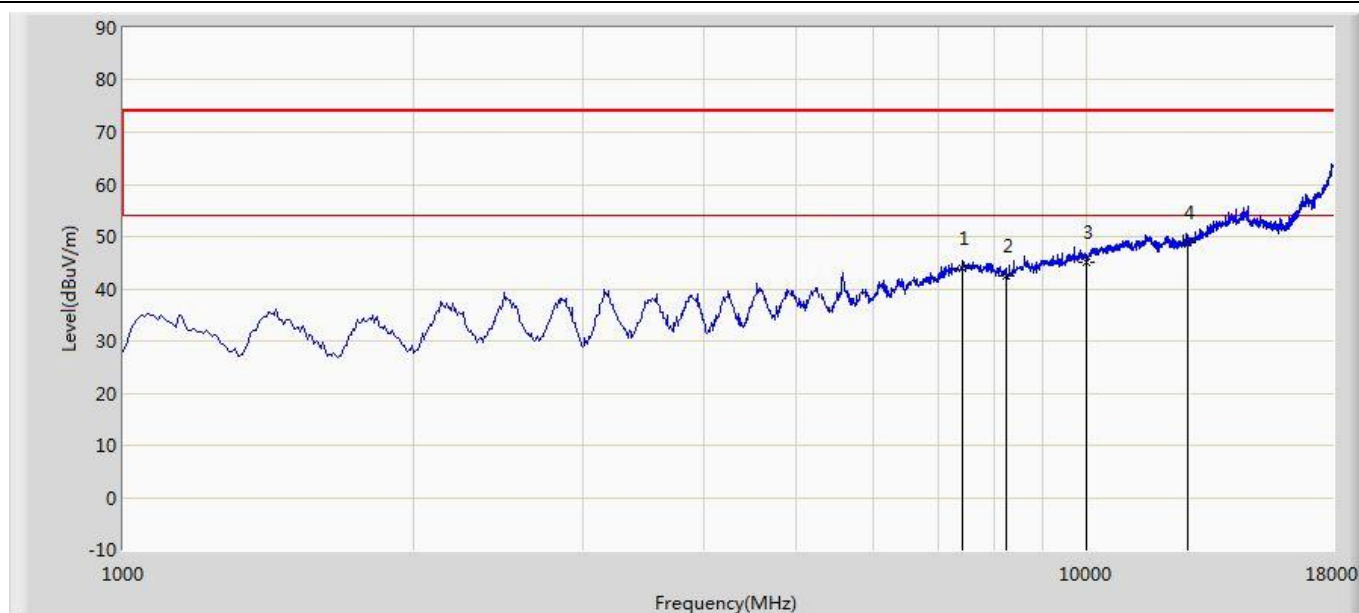


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7434.500	43.796	31.096	-30.204	74.000	12.700	PK
2			8233.500	42.368	30.480	-31.632	74.000	11.888	PK
3			9976.000	45.188	29.839	-28.812	74.000	15.349	PK
4		*	12721.500	48.800	29.982	-25.200	74.000	18.818	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 18:24
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

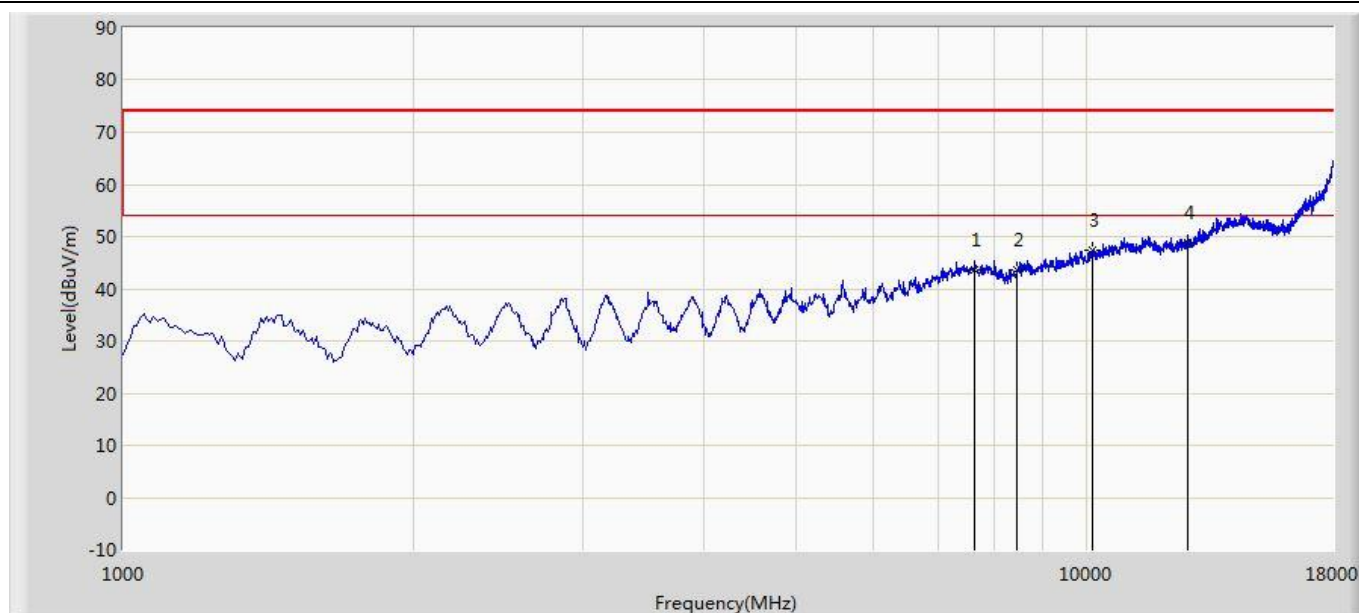


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7638.500	43.721	31.157	-30.279	74.000	12.564	PK
2			8454.500	43.747	31.222	-30.253	74.000	12.525	PK
3			10129.000	47.322	31.449	-26.678	74.000	15.873	PK
4		*	12721.500	48.800	29.982	-25.200	74.000	18.818	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/28 - 18:25
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5210MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

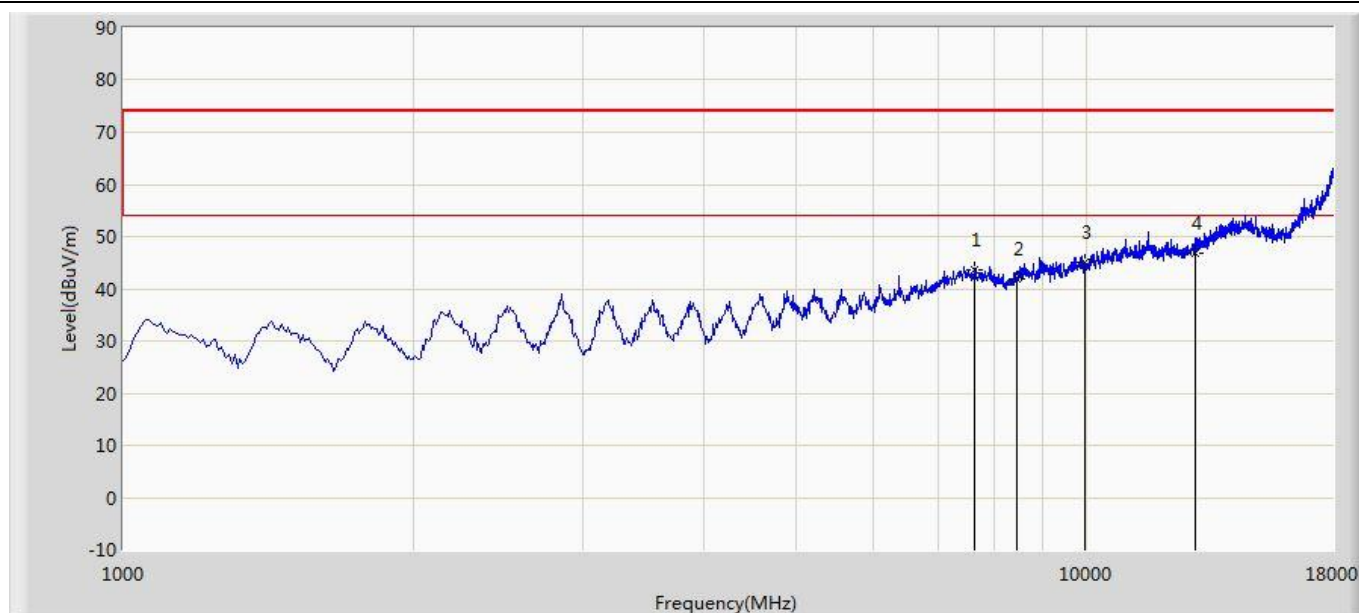


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7638.500	43.721	31.157	-30.279	74.000	12.564	PK
2			8446.000	41.927	29.460	-32.073	74.000	12.467	PK
3			9942.000	44.977	29.661	-29.023	74.000	15.316	PK
4		*	12951.000	46.785	27.063	-27.215	74.000	19.722	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/17 - 13:33
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit 802.11ac-VHT160 at Channel 5250MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

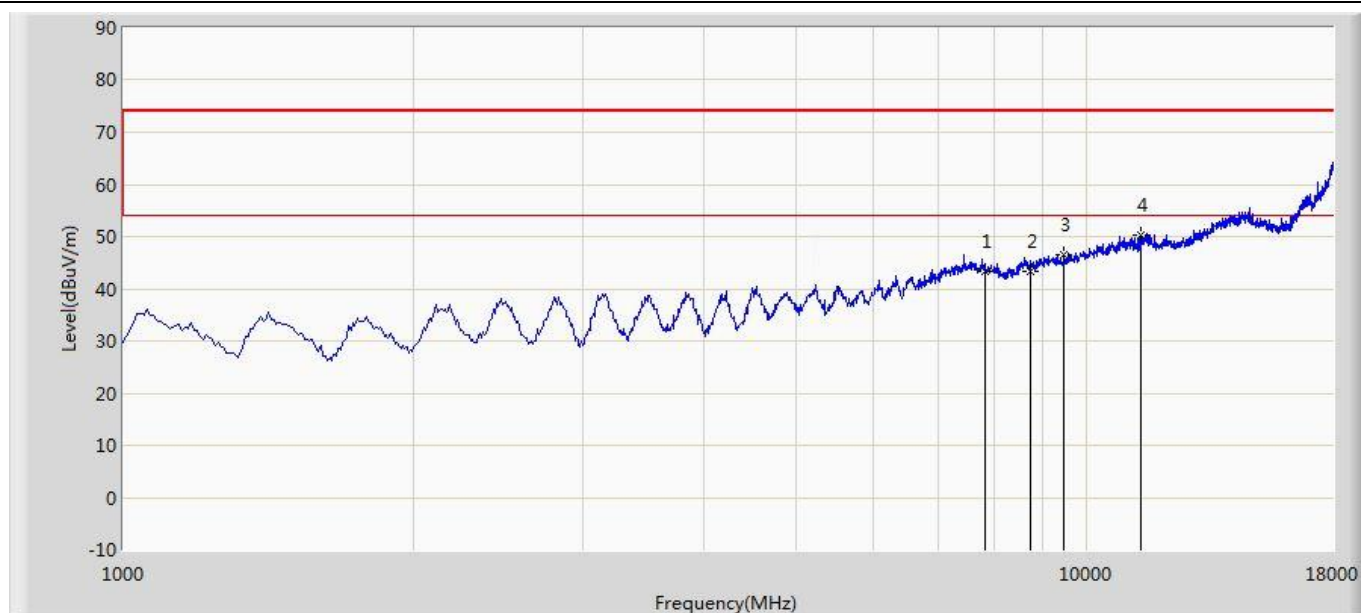


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7842.500	43.416	31.022	-30.584	74.000	12.393	PK
2			8726.500	43.305	29.469	-30.695	74.000	13.836	PK
3			9449.060	46.407	31.990	-27.593	74.000	14.418	PK
4		*	11387.020	50.405	31.336	-23.595	74.000	19.069	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/17 - 13:35
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit 802.11ac-VHT160 at Channel 5250MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

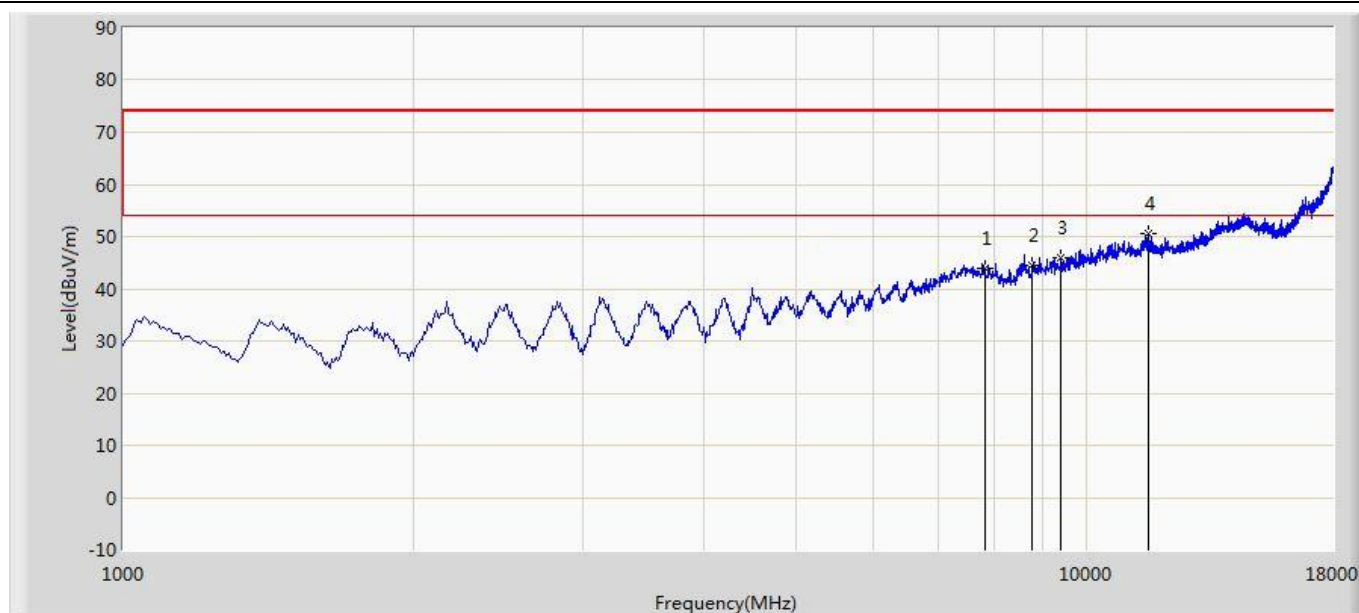


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7842.502	43.810	31.416	-30.190	74.000	12.394	PK
2			8769.029	44.404	30.480	-29.596	74.000	13.924	PK
3			9389.502	45.804	31.313	-28.196	74.000	14.492	PK
4		*	11565.506	50.501	31.045	-23.499	74.000	19.456	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

5GHz Wi-Fi Model: APEX0374 - Directional Antenna (MT-484052/NVH)

Site: AC1	Time: 2017/08/21 - 22:44
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11a at Channel 5260MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

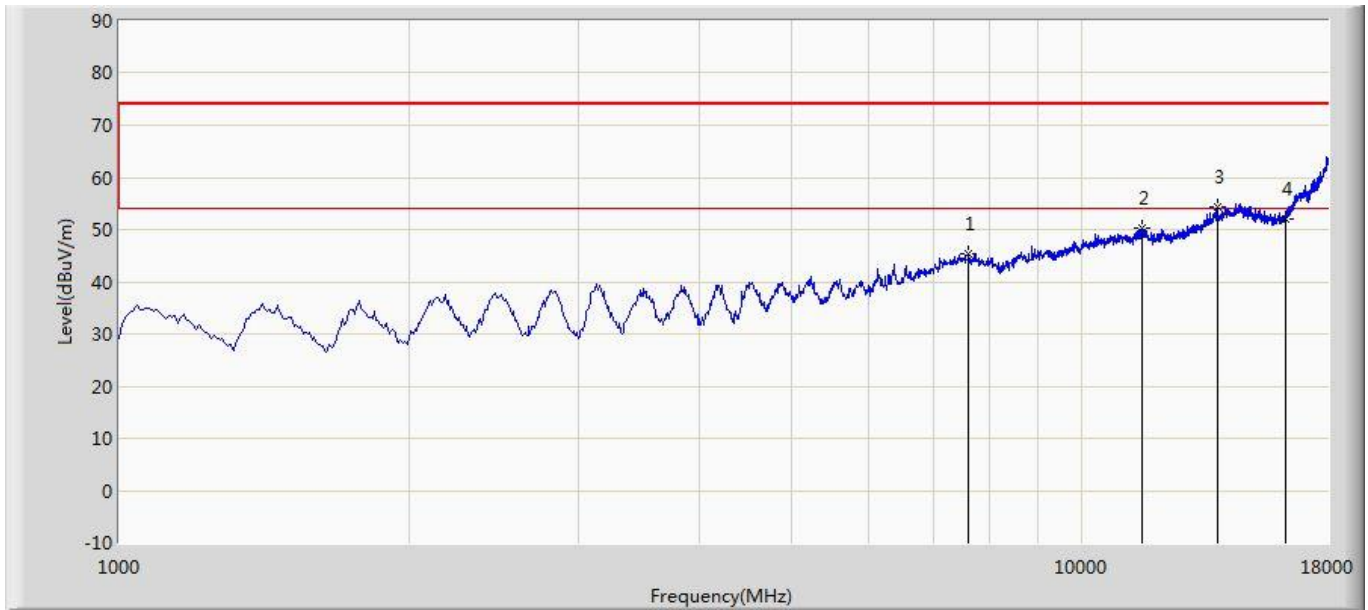


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7613.000	45.221	32.582	-28.779	74.000	12.639	PK
2			11548.500	50.252	30.804	-23.748	74.000	19.448	PK
3		*	13826.500	54.307	32.130	-19.693	74.000	22.177	PK
4			16283.040	52.040	31.033	-21.960	74.000	21.006	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 22:47
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11a at Channel 5260MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

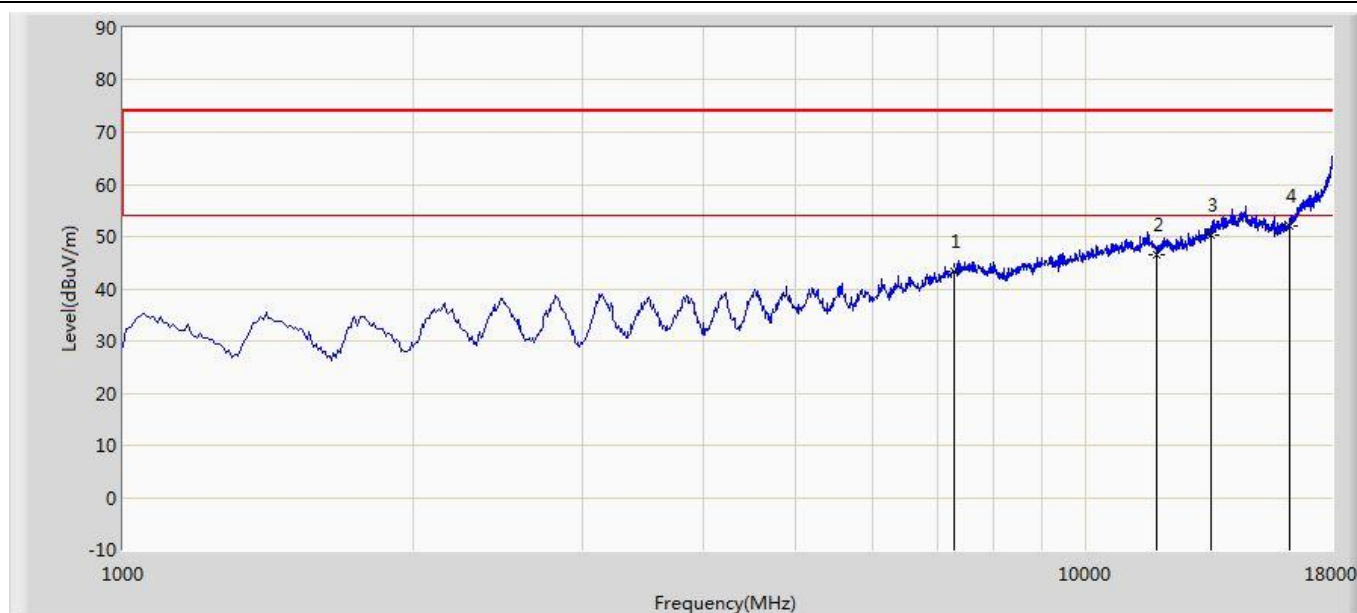


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7298.500	43.393	31.075	-30.607	74.000	12.317	PK
2			11837.500	46.616	27.914	-27.384	74.000	18.701	PK
3			13486.500	50.186	28.463	-23.814	74.000	21.722	PK
4		*	16291.500	51.956	30.908	-22.044	74.000	21.048	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 23:33
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

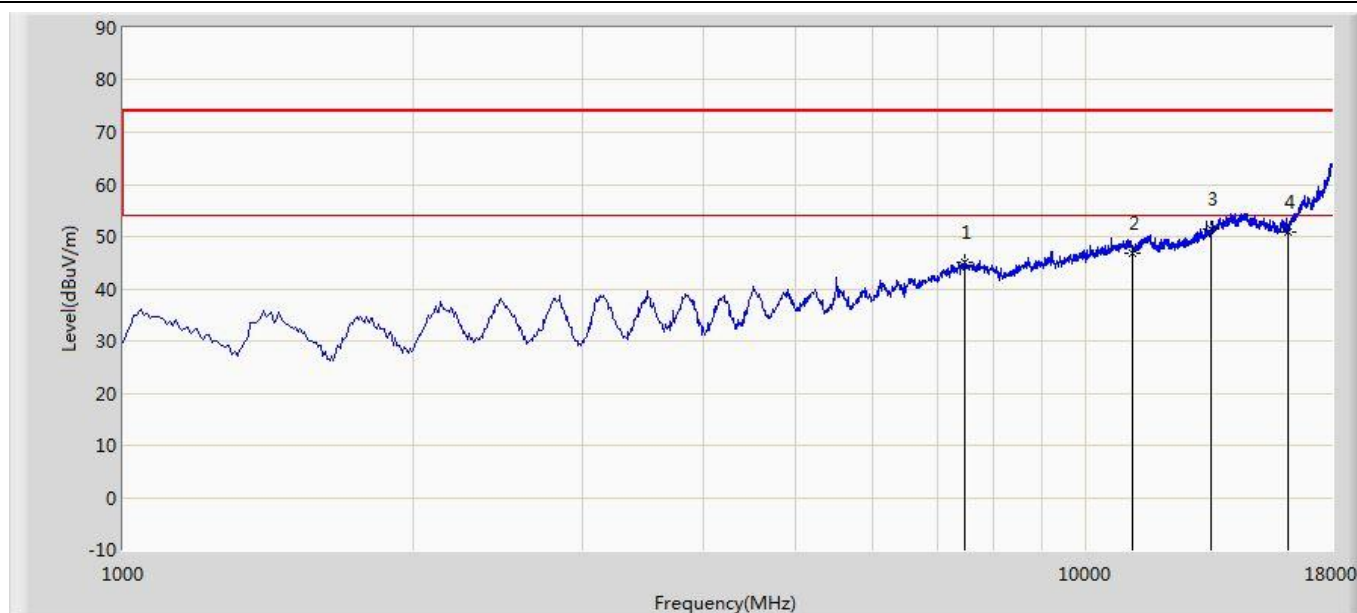


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7477.000	45.075	32.267	-28.925	74.000	12.808	PK
2			11191.500	46.938	28.206	-27.062	74.000	18.732	PK
3		*	13495.000	51.435	29.686	-22.565	74.000	21.749	PK
4			16223.500	50.755	30.003	-23.245	74.000	20.752	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 23:34
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

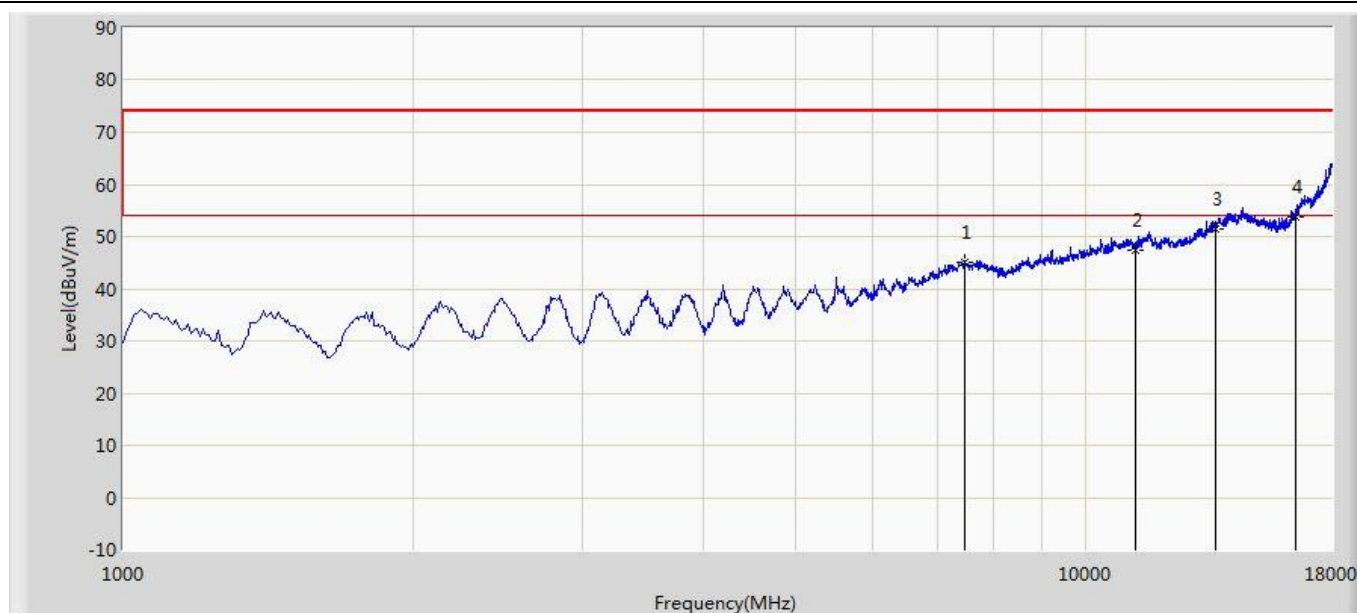


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7477.000	45.075	32.267	-28.925	74.000	12.808	PK
2			11242.500	47.310	28.531	-26.690	74.000	18.780	PK
3			13622.500	51.503	29.703	-22.497	74.000	21.800	PK
4		*	16521.000	53.771	31.789	-20.229	74.000	21.982	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/21 - 23:58
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11n-HT40 at Channel 5270MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

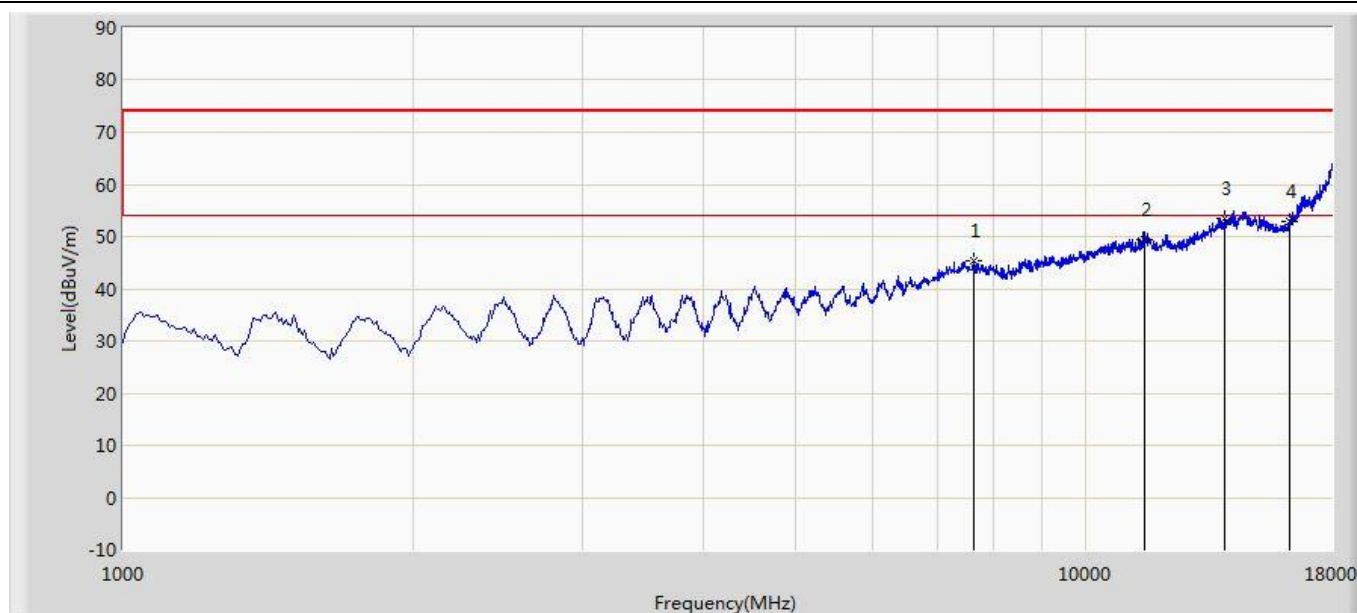


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7638.500	45.469	32.905	-28.531	74.000	12.564	PK
2			11489.000	49.559	30.229	-24.441	74.000	19.330	PK
3		*	13903.000	53.540	31.202	-20.460	74.000	22.338	PK
4			16274.500	52.913	31.948	-21.087	74.000	20.965	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/22 - 00:00
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11n-HT40 at Channel 5270MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

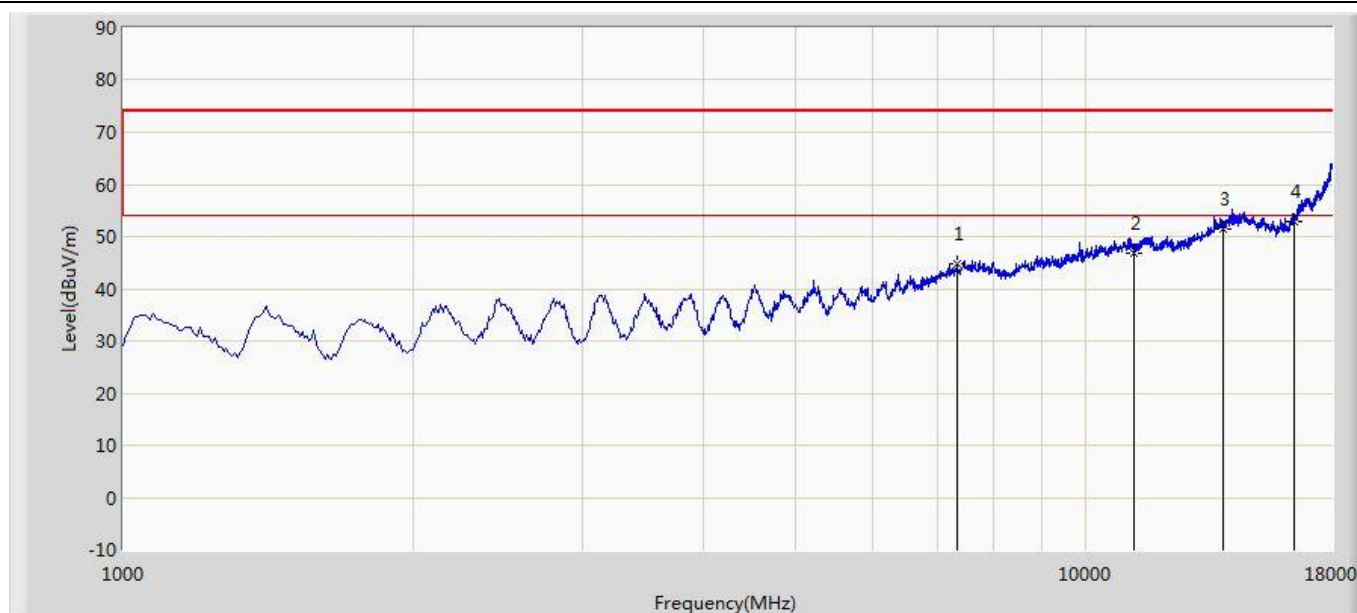


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7349.500	44.835	32.419	-29.165	74.000	12.416	PK
2			11217.000	46.934	28.173	-27.066	74.000	18.761	PK
3			13860.500	51.378	29.104	-22.622	74.000	22.273	PK
4		*	16436.000	52.787	31.214	-21.213	74.000	21.573	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/22 - 00:30
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5580MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

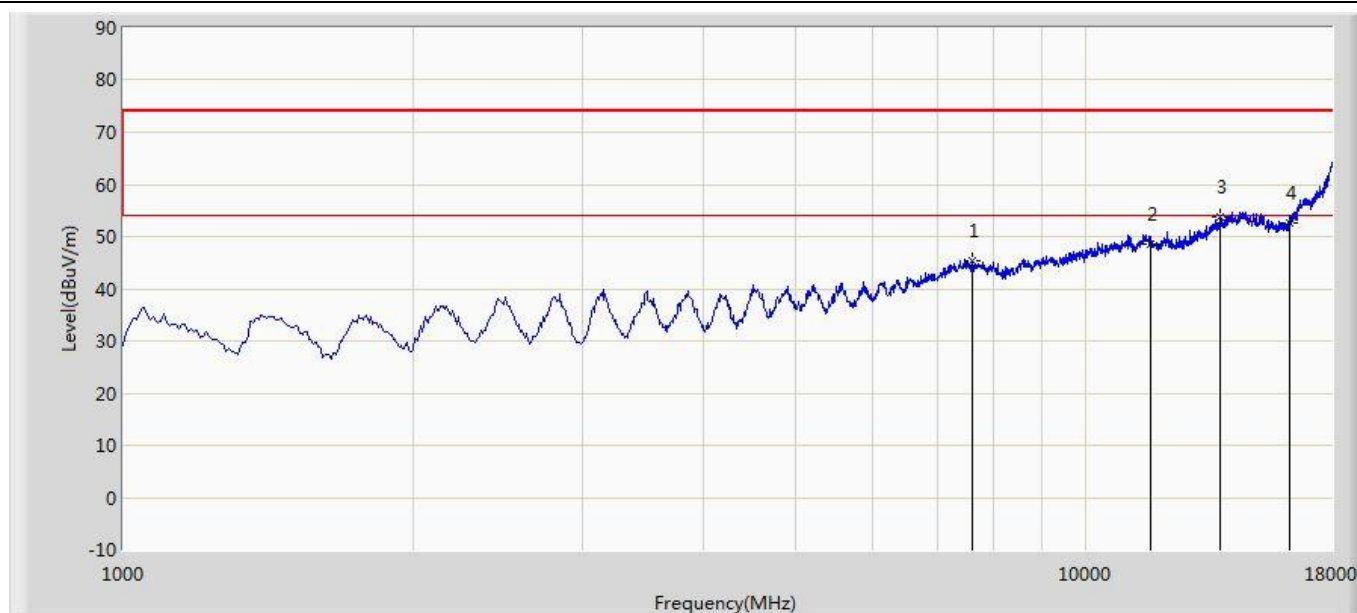


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7604.500	45.470	32.805	-28.530	74.000	12.665	PK
2			11667.500	48.506	29.246	-25.494	74.000	19.260	PK
3		*	13801.000	53.780	31.687	-20.220	74.000	22.093	PK
4			16274.500	52.601	31.636	-21.399	74.000	20.965	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/22 - 00:31
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5580MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

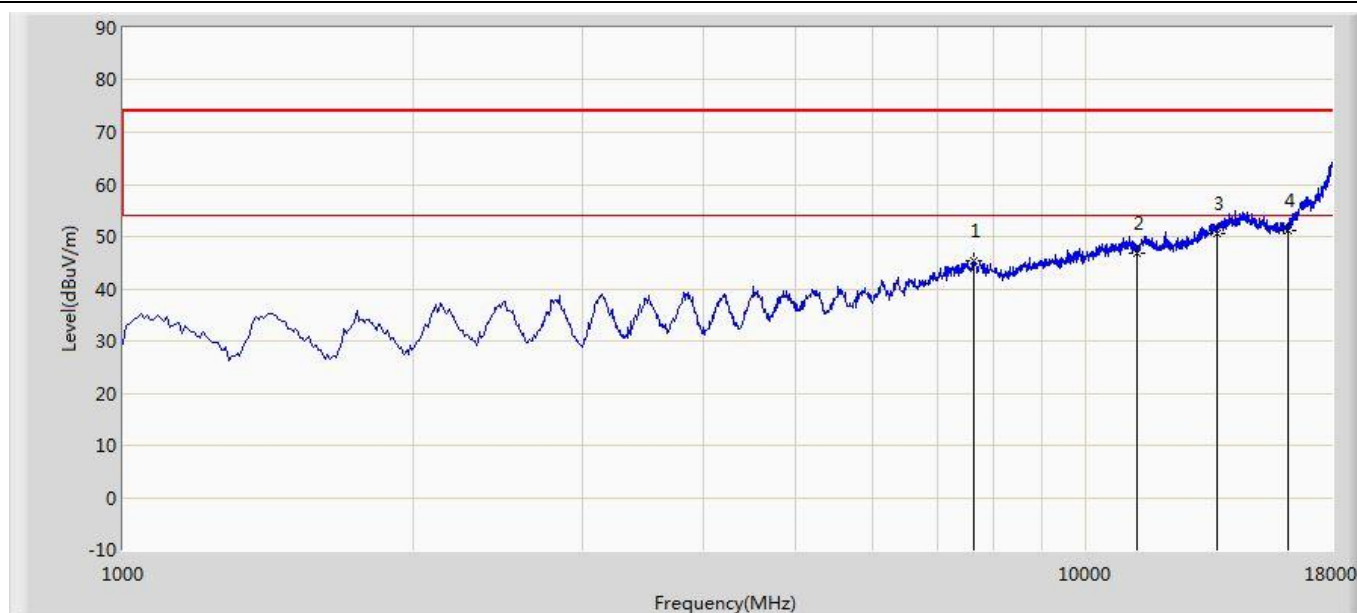


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7647.000	45.400	32.861	-28.600	74.000	12.539	PK
2			11293.500	46.800	27.939	-27.200	74.000	18.861	PK
3			13673.500	50.700	28.812	-23.300	74.000	21.888	PK
4		*	16206.500	51.100	30.407	-22.900	74.000	20.694	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/22 - 00:49
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

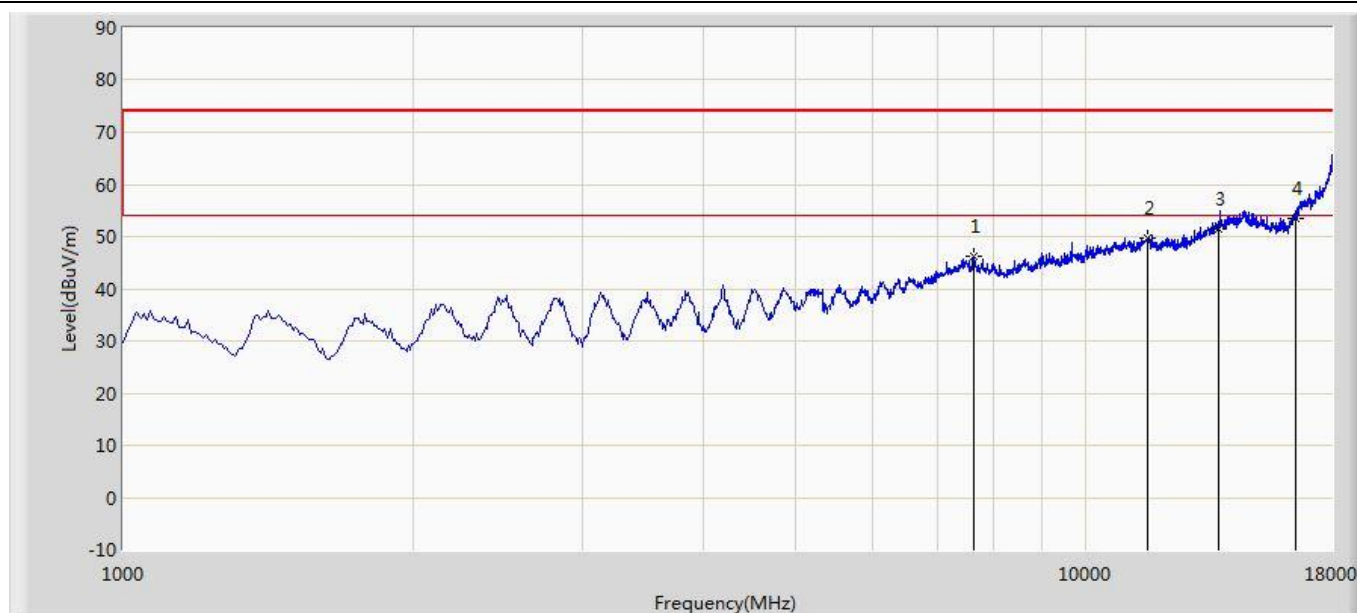


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7655.500	46.151	33.631	-27.849	74.000	12.519	PK
2			11591.000	49.800	30.347	-24.200	74.000	19.453	PK
3			13733.000	51.500	29.498	-22.500	74.000	22.002	PK
4		*	16504.000	53.400	31.500	-20.600	74.000	21.900	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/22 - 00:50
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

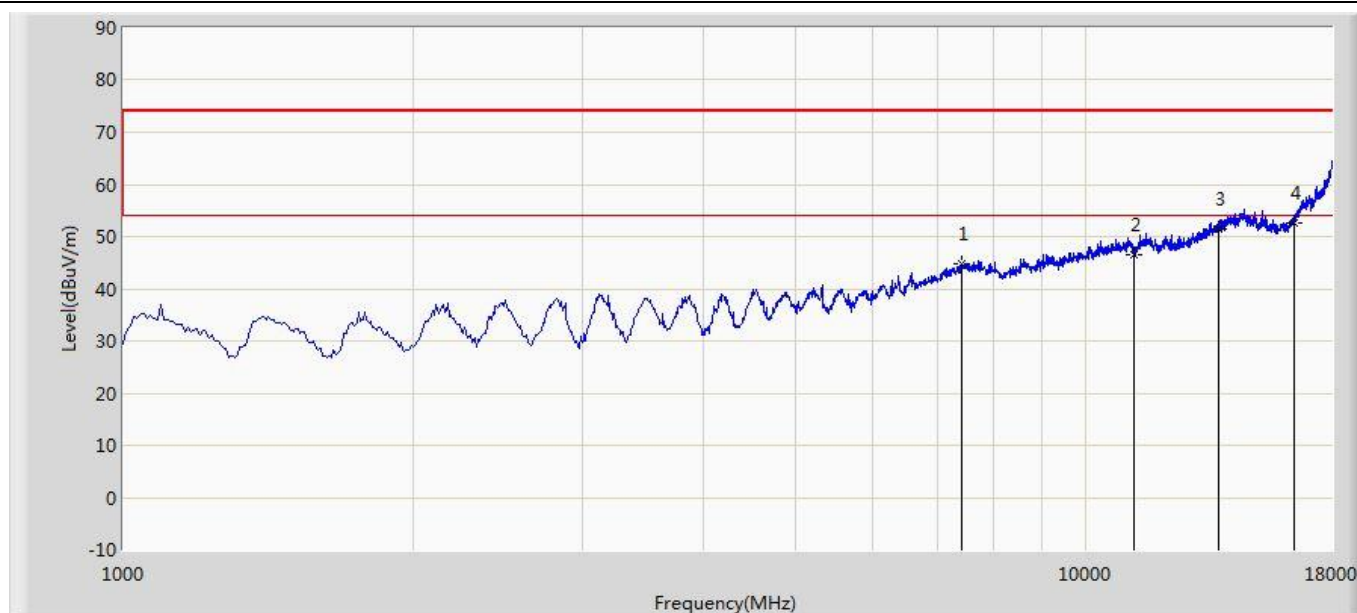


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7434.500	44.839	32.139	-29.161	74.000	12.700	PK
2			11200.000	46.644	27.898	-27.356	74.000	18.745	PK
3			13733.000	51.498	29.496	-22.502	74.000	22.002	PK
4		*	16444.500	52.525	30.928	-21.475	74.000	21.598	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/22 - 01:07
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

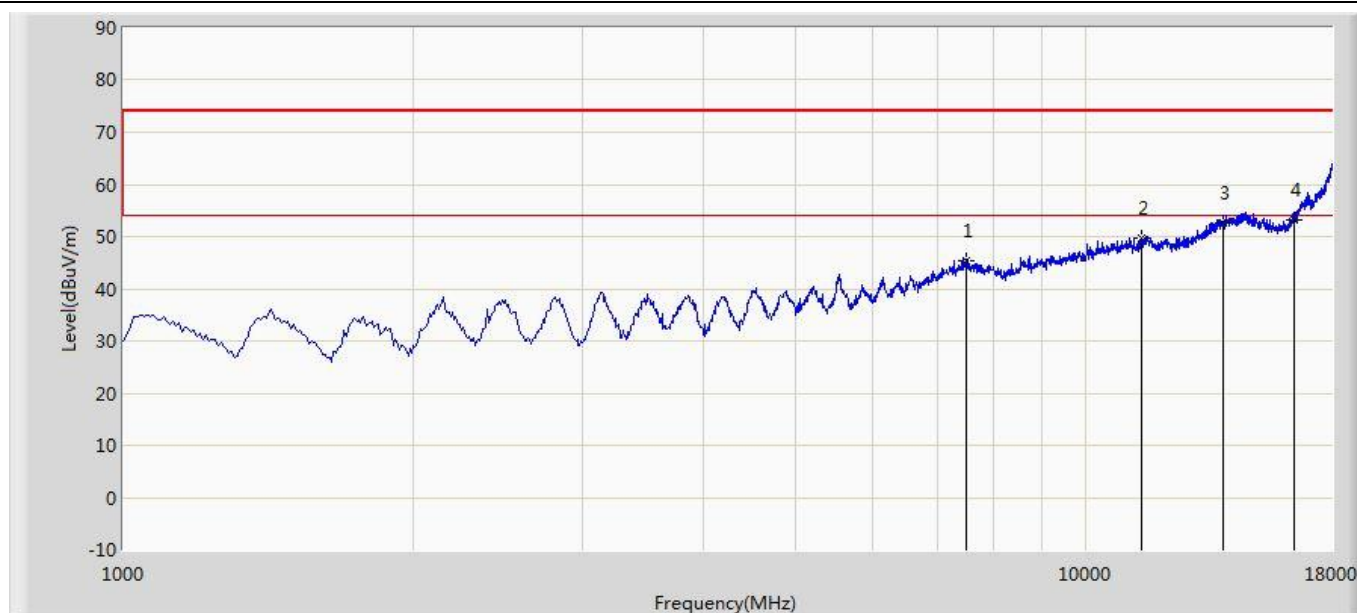


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7519.500	45.500	32.656	-28.500	74.000	12.844	PK
2			11438.000	49.600	30.407	-24.400	74.000	19.192	PK
3			13860.500	52.604	30.330	-21.396	74.000	22.273	PK
4		*	16436.000	53.204	31.631	-20.796	74.000	21.573	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/22 - 01:08
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

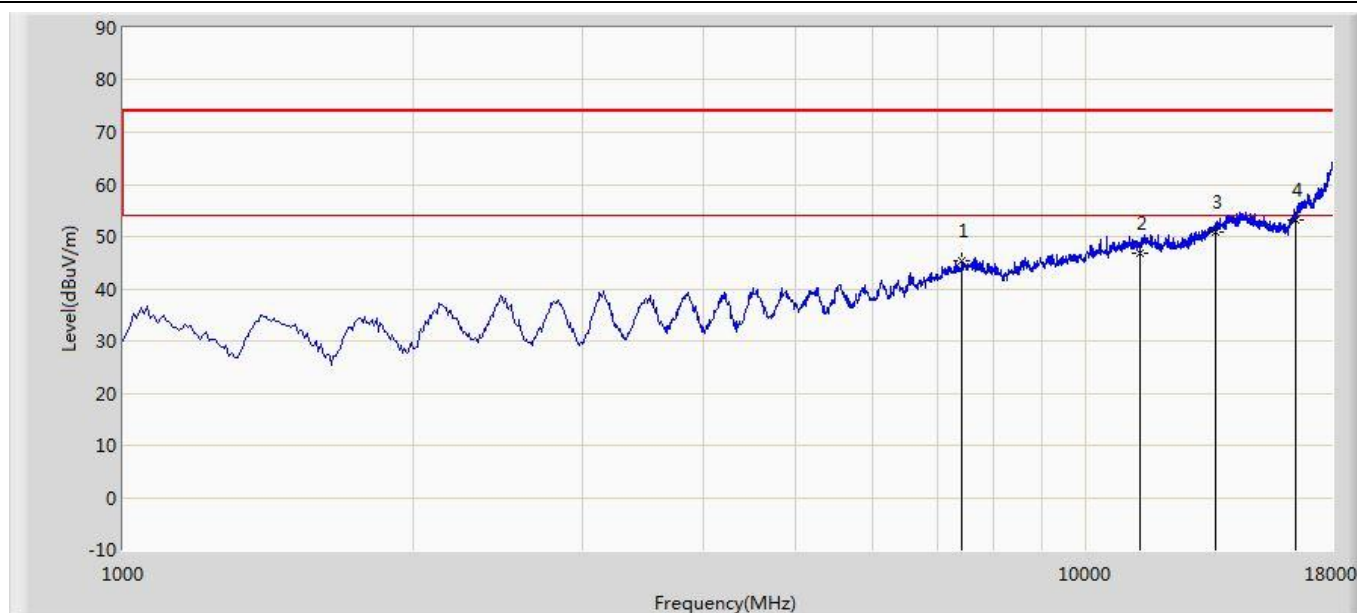


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7434.500	45.414	32.714	-28.586	74.000	12.700	PK
2			11370.000	46.924	27.892	-27.076	74.000	19.032	PK
3			13648.000	50.923	29.106	-23.077	74.000	21.817	PK
4		*	16504.000	53.205	31.305	-20.795	74.000	21.900	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/22 - 01:11
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0+1 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

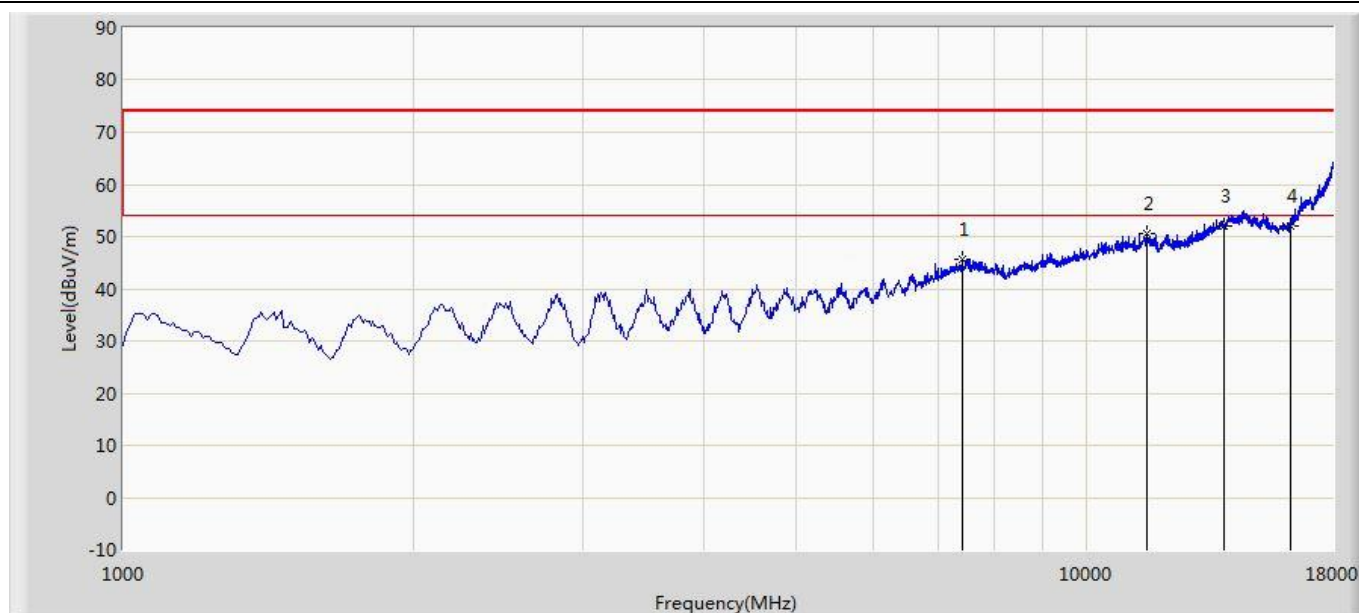


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7417.500	45.604	32.962	-28.396	74.000	12.642	PK
2			11557.000	50.495	31.038	-23.505	74.000	19.457	PK
3			13894.500	51.943	29.622	-22.057	74.000	22.321	PK
4		*	16283.000	52.100	31.093	-21.900	74.000	21.006	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/22 - 01:13
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0+1 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

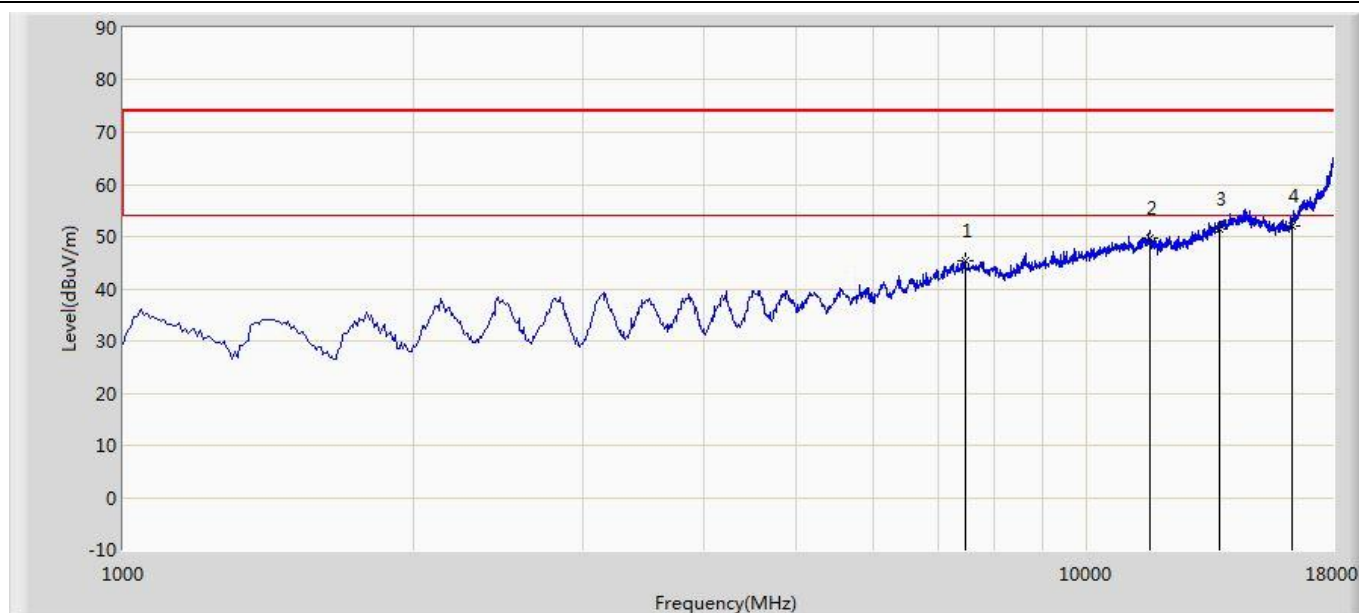


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7494.000	45.400	32.558	-28.600	74.000	12.842	PK
2			11616.500	49.700	30.287	-24.300	74.000	19.413	PK
3			13724.500	51.500	29.506	-22.500	74.000	21.994	PK
4		*	16351.000	52.100	30.822	-21.900	74.000	21.279	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/22 - 01:13
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 2+3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

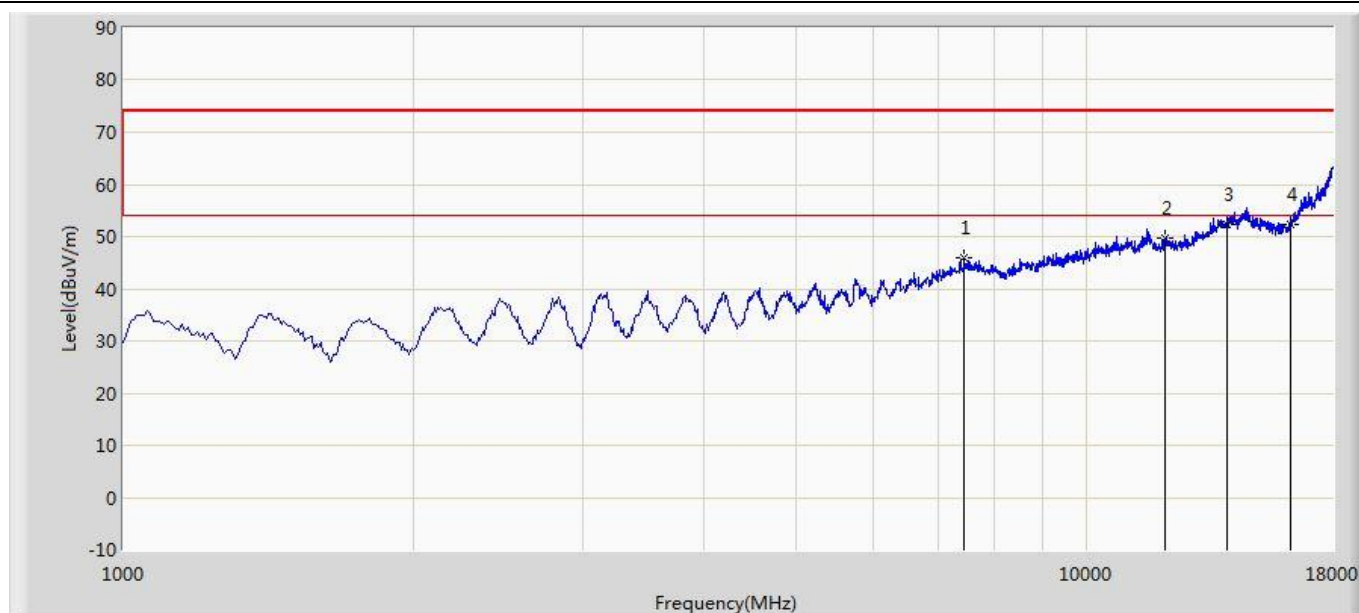


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7460.000	45.800	33.026	-28.200	74.000	12.774	PK
2			12033.000	49.800	31.008	-24.200	74.000	18.792	PK
3			13954.000	52.200	29.690	-21.800	74.000	22.510	PK
4		*	16283.000	52.400	31.393	-21.600	74.000	21.006	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/22 - 01:14
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 2+3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

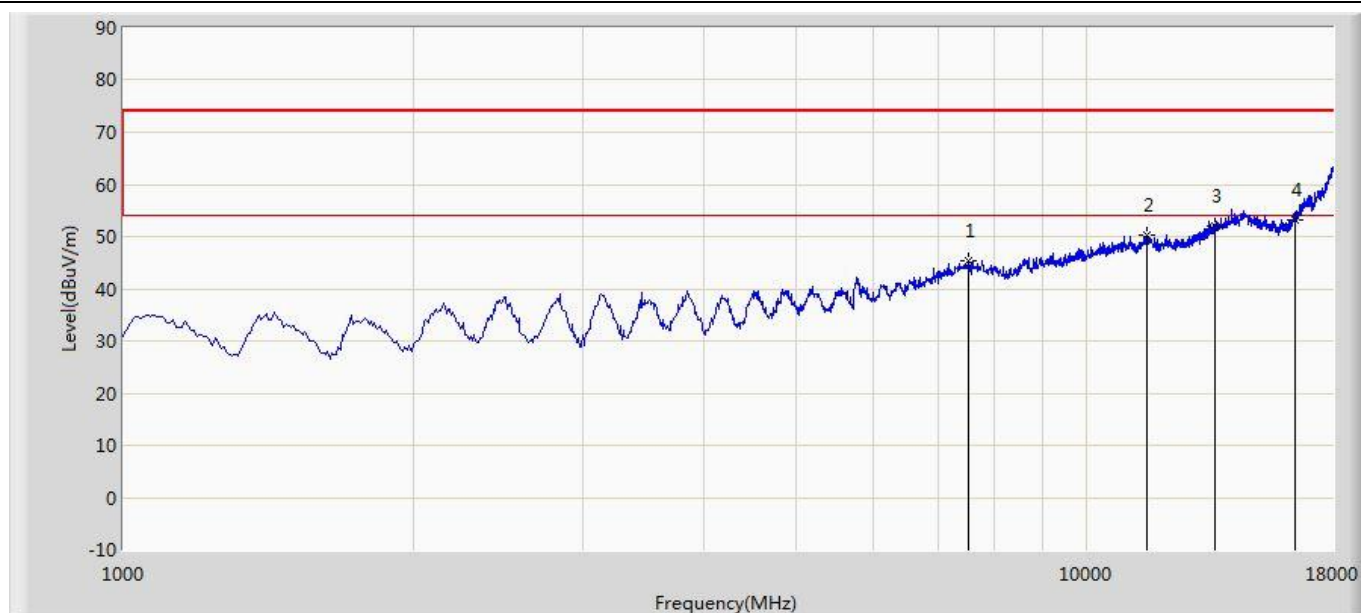


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7536.500	45.500	32.666	-28.500	74.000	12.834	PK
2			11557.000	50.300	30.843	-23.700	74.000	19.457	PK
3			13571.500	52.100	30.270	-21.900	74.000	21.830	PK
4		*	16427.500	53.300	31.747	-20.700	74.000	21.553	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/22 - 01:03
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT160 at Channel 5250MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

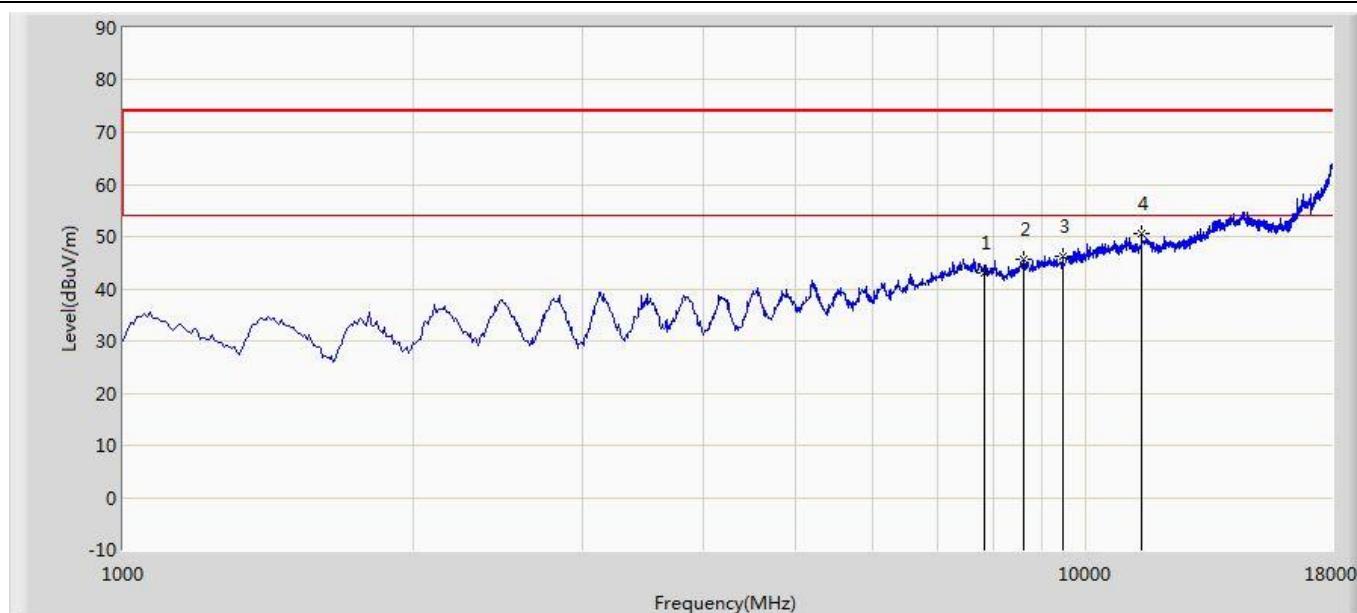


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7842.500	43.000	30.606	-31.000	74.000	12.393	PK
2			8599.000	45.700	32.260	-28.300	74.000	13.441	PK
3			9474.500	46.200	31.806	-27.800	74.000	14.394	PK
4		*	11421.000	50.500	31.351	-23.500	74.000	19.149	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/22 - 01:05
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT160 at Channel 5250MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

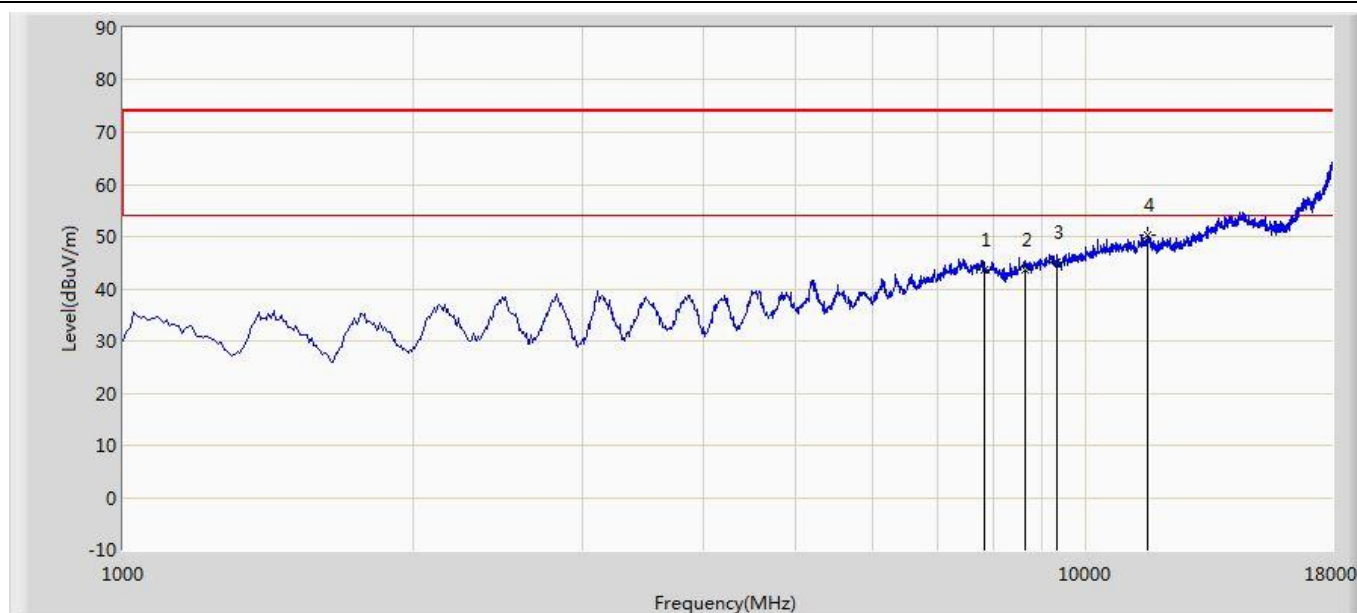


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7842.500	43.600	31.206	-30.400	74.000	12.393	PK
2			8658.500	43.600	30.003	-30.400	74.000	13.597	PK
3			9338.500	45.200	30.634	-28.800	74.000	14.565	PK
4		*	11582.500	50.300	30.845	-23.700	74.000	19.456	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

5GHz Wi-Fi Model: APEX0375

Site: AC1	Time: 2017/09/26 - 02:48
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11a at Channel 5240MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

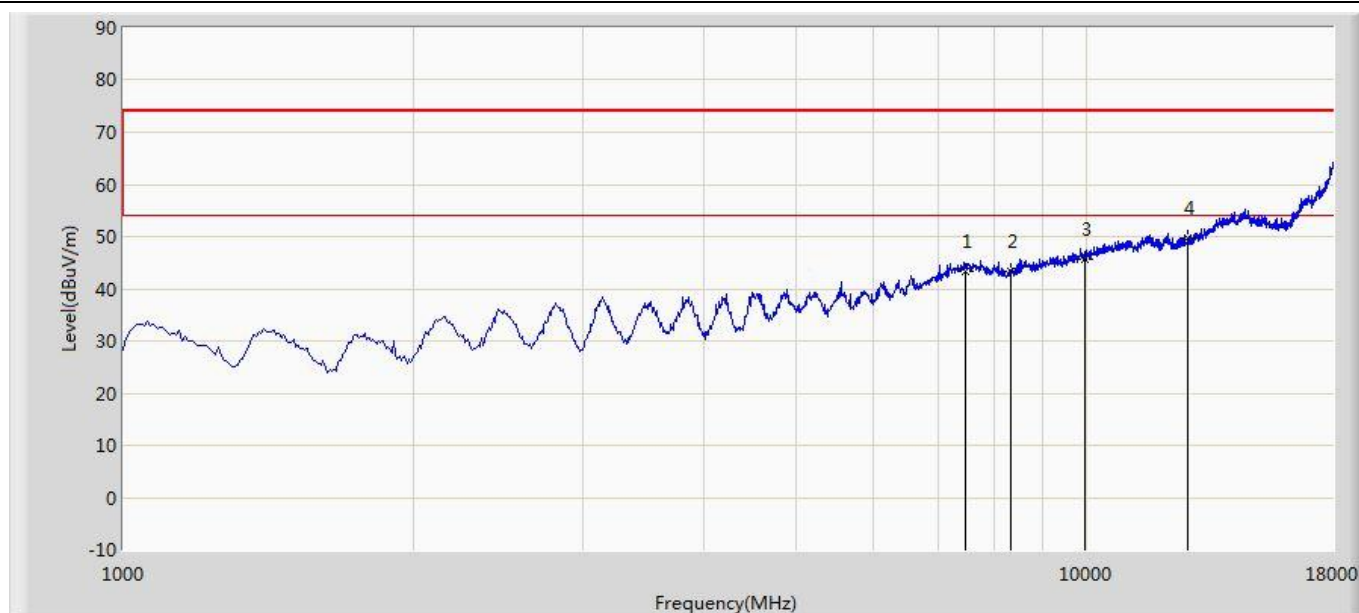


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7468.500	43.449	30.658	-30.551	74.000	12.791	PK
2			8352.500	43.201	31.218	-30.799	74.000	11.982	PK
3			9950.500	45.508	30.183	-28.492	74.000	15.325	PK
4		*	12721.500	49.702	30.884	-24.298	74.000	18.818	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/26 - 02:50
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11a at Channel 5240MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

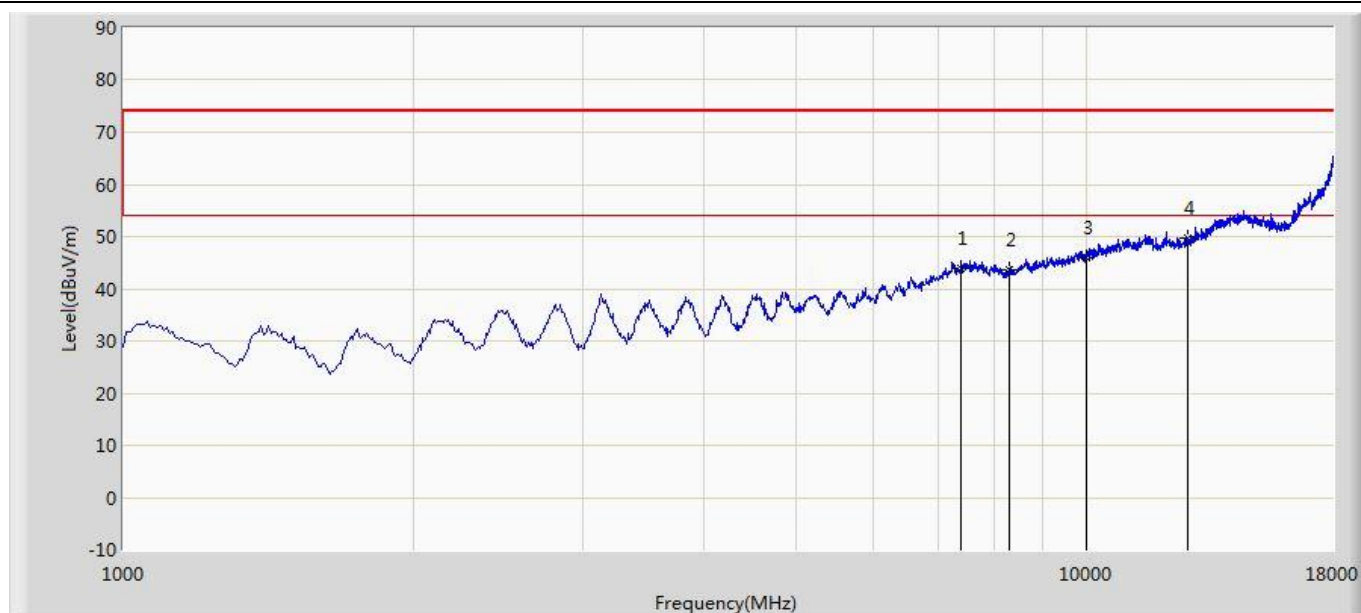


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7409.000	43.784	31.172	-30.216	74.000	12.612	PK
a			8310.000	43.698	31.781	-30.302	74.000	11.917	PK
3			9993.000	45.893	30.529	-28.107	74.000	15.364	PK
4		*	12721.500	49.702	30.884	-24.298	74.000	18.818	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/11 - 21:15
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

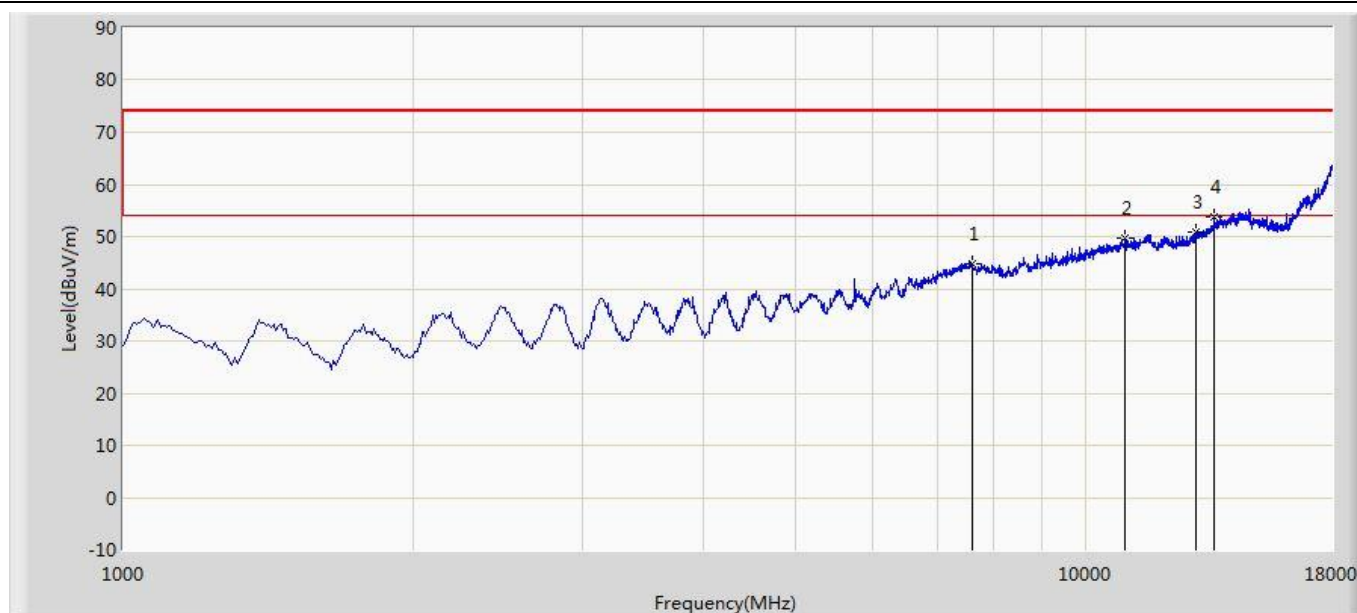


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7604.500	44.914	32.249	-29.086	74.000	12.665	PK
2			10970.500	49.653	31.205	-24.347	74.000	18.447	PK
3			13019.000	50.964	31.052	-23.036	74.000	19.912	PK
4		*	13597.000	53.720	31.928	-20.280	74.000	21.792	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/11 - 21:17
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

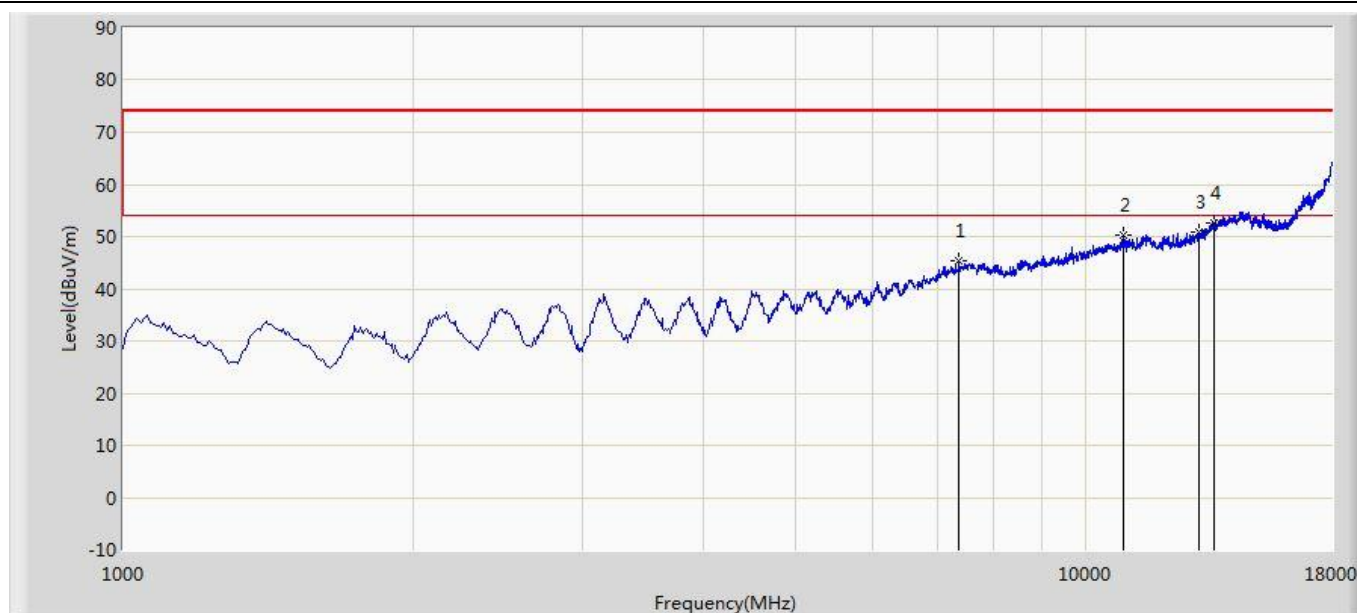


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7383.500	45.254	32.729	-28.746	74.000	12.525	PK
2			10919.500	50.162	31.791	-23.838	74.000	18.370	PK
3			13112.500	50.973	30.881	-23.027	74.000	20.092	PK
4		*	13588.500	52.640	30.835	-21.360	74.000	21.805	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/11 - 21:20
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

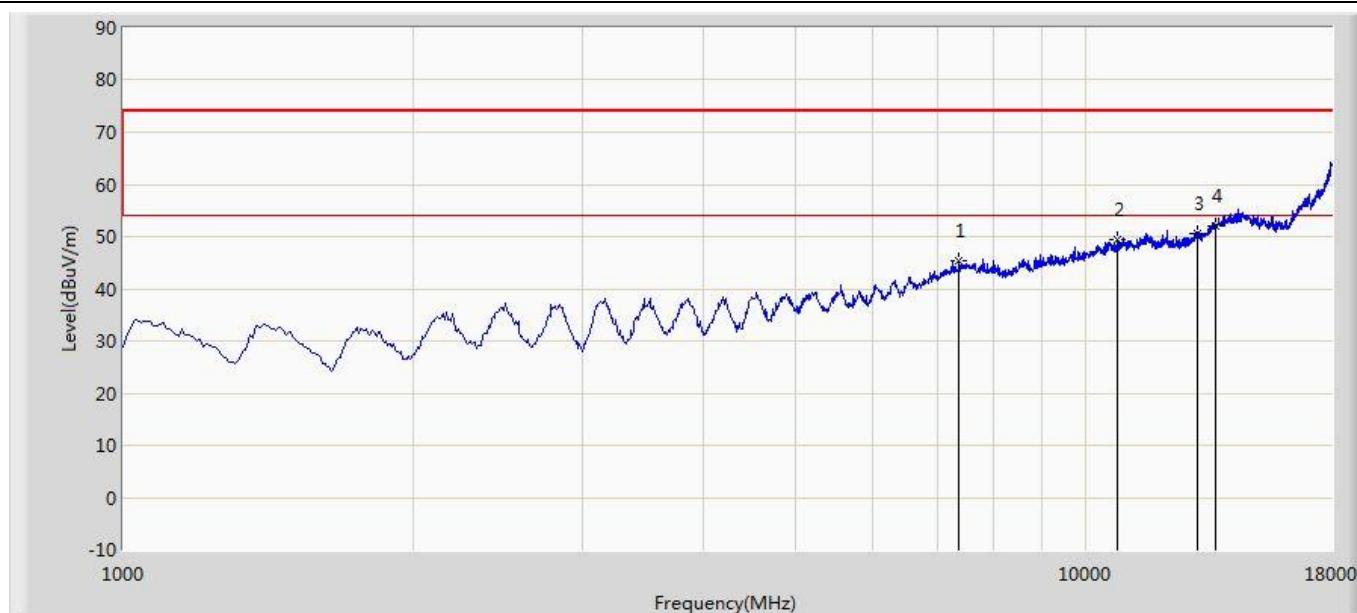


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7383.500	45.304	32.779	-28.696	74.000	12.525	PK
2			10758.000	49.548	31.843	-24.452	74.000	17.704	PK
3			13027.500	50.723	30.788	-23.277	74.000	19.935	PK
4		*	13605.500	51.975	30.184	-22.025	74.000	21.791	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/11 - 21:21
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

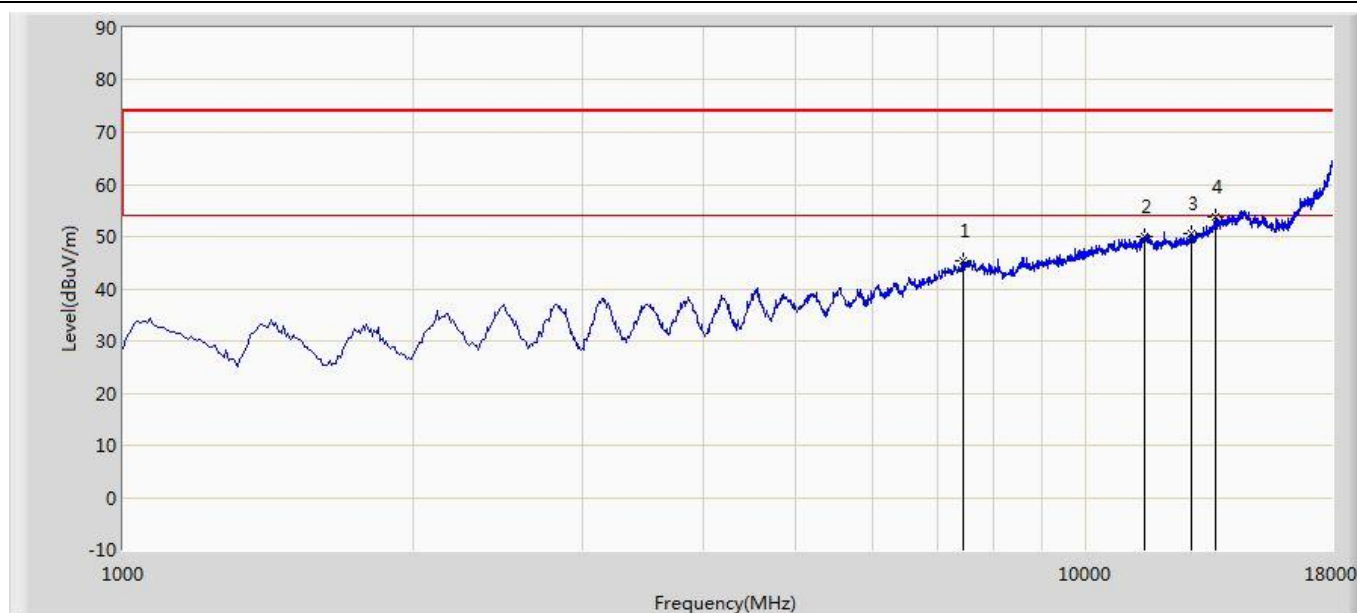


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7443.000	45.312	32.584	-28.688	74.000	12.728	PK
2			11480.500	50.139	30.832	-23.861	74.000	19.307	PK
3			12874.500	50.639	31.292	-23.361	74.000	19.346	PK
4		*	13605.500	53.655	31.864	-20.345	74.000	21.791	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/11 - 21:44
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

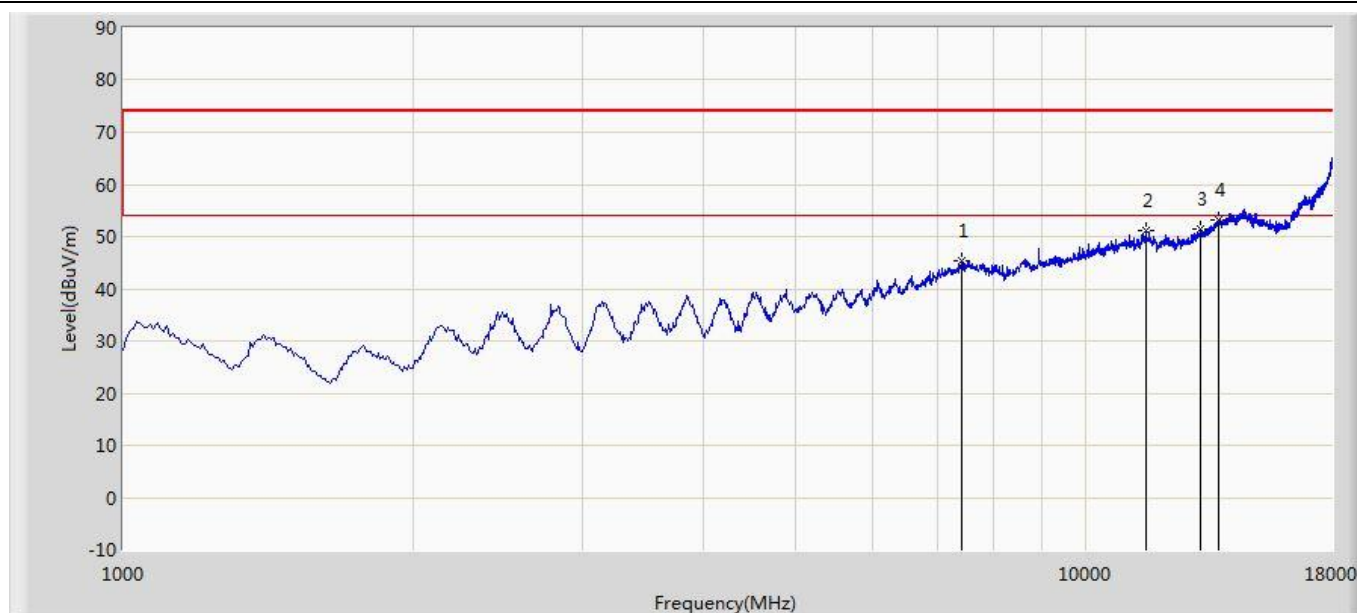


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7434.500	45.450	32.750	-28.550	74.000	12.700	PK
2			11523.000	51.045	31.640	-22.955	74.000	19.405	PK
3			13163.500	51.338	31.171	-22.662	74.000	20.167	PK
4		*	13707.500	53.249	31.271	-20.751	74.000	21.979	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/11 - 21:47
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

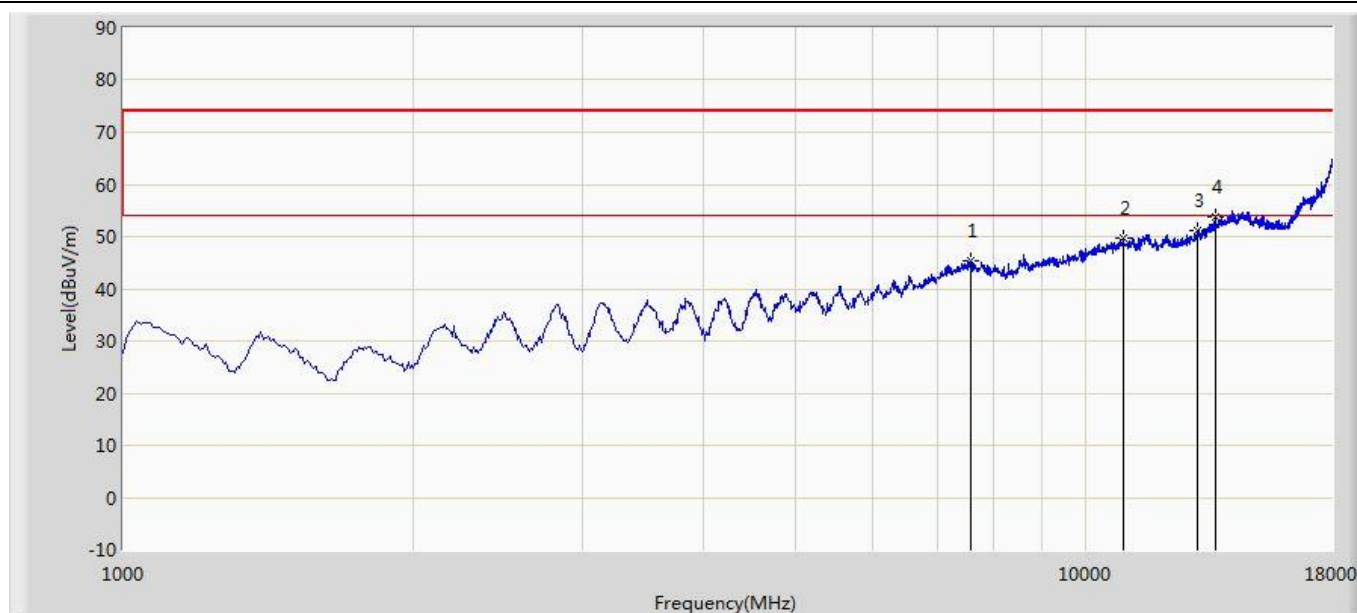


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7579.000	45.457	32.716	-28.543	74.000	12.741	PK
2			10928.000	49.691	31.301	-24.309	74.000	18.389	PK
3			13027.500	51.198	31.263	-22.802	74.000	19.935	PK
4		*	13605.500	53.663	31.872	-20.337	74.000	21.791	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/11 - 22:52
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

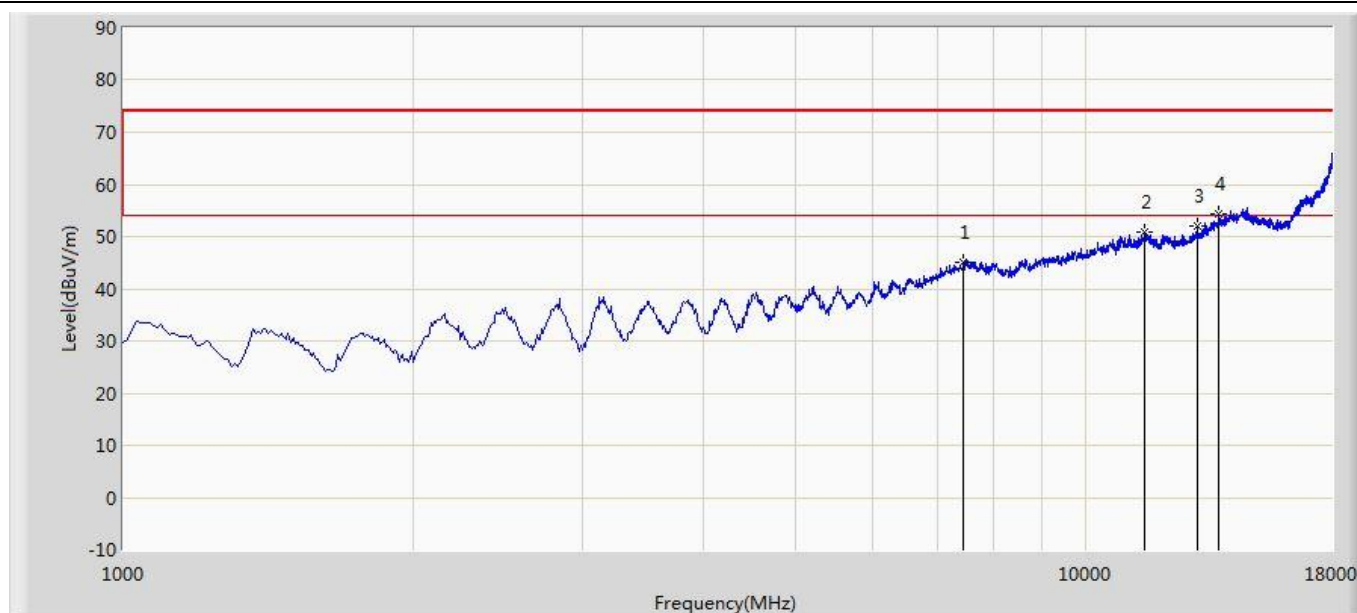


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7451.500	45.212	32.460	-28.788	74.000	12.753	PK
2			11506.000	50.855	31.483	-23.145	74.000	19.371	PK
3			13027.500	52.089	32.154	-21.911	74.000	19.935	PK
4		*	13716.000	54.240	32.254	-19.760	74.000	21.986	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/11 - 22:53
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

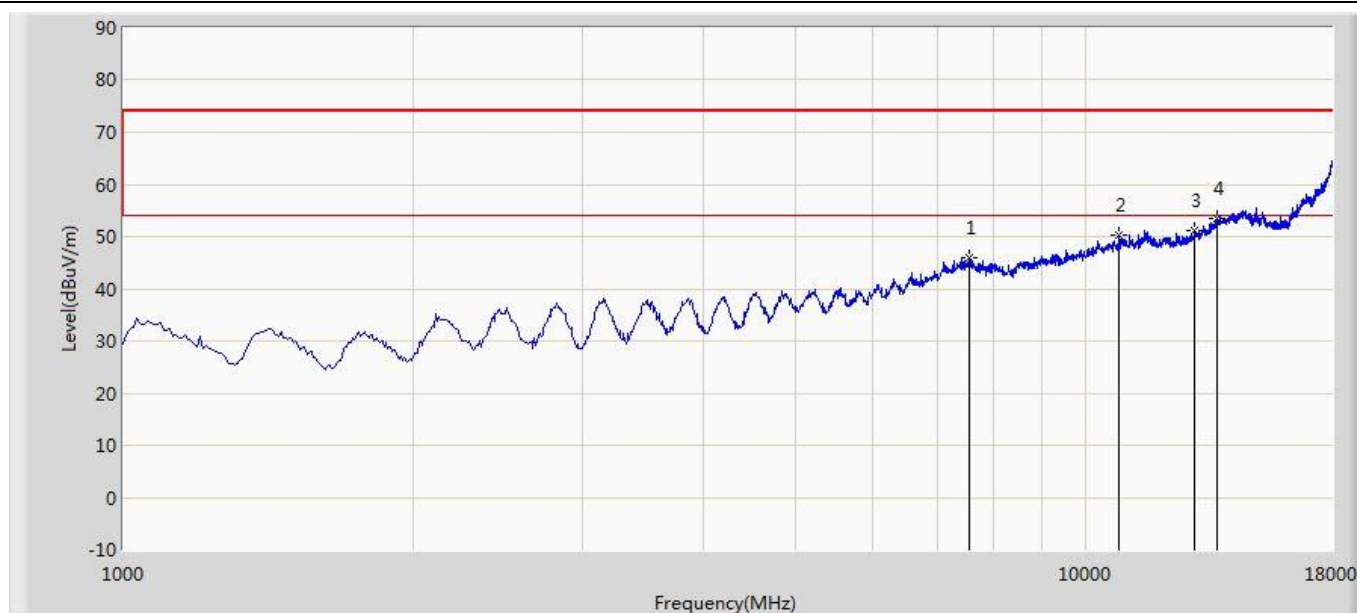


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7553.500	45.978	33.168	-28.022	74.000	12.810	PK
2			10809.000	50.276	32.332	-23.724	74.000	17.944	PK
3			12976.500	51.166	31.372	-22.834	74.000	19.794	PK
4		*	13699.000	53.566	31.608	-20.434	74.000	21.957	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/11 - 23:06
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

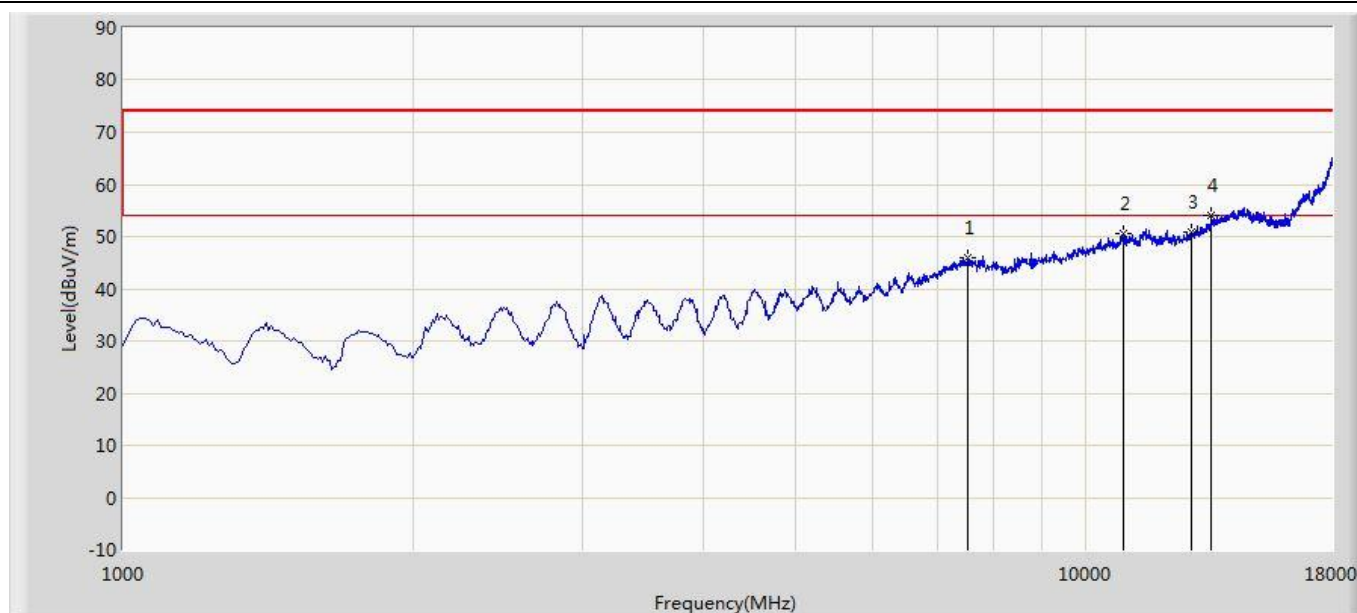


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			7536.500	46.011	33.177	-27.989	74.000	12.834	PK
2			10928.000	50.659	32.269	-23.341	74.000	18.389	PK
3			12849.000	50.753	31.518	-23.247	74.000	19.235	PK
4		*	13469.500	53.993	32.323	-20.007	74.000	21.670	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/11 - 23:10
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

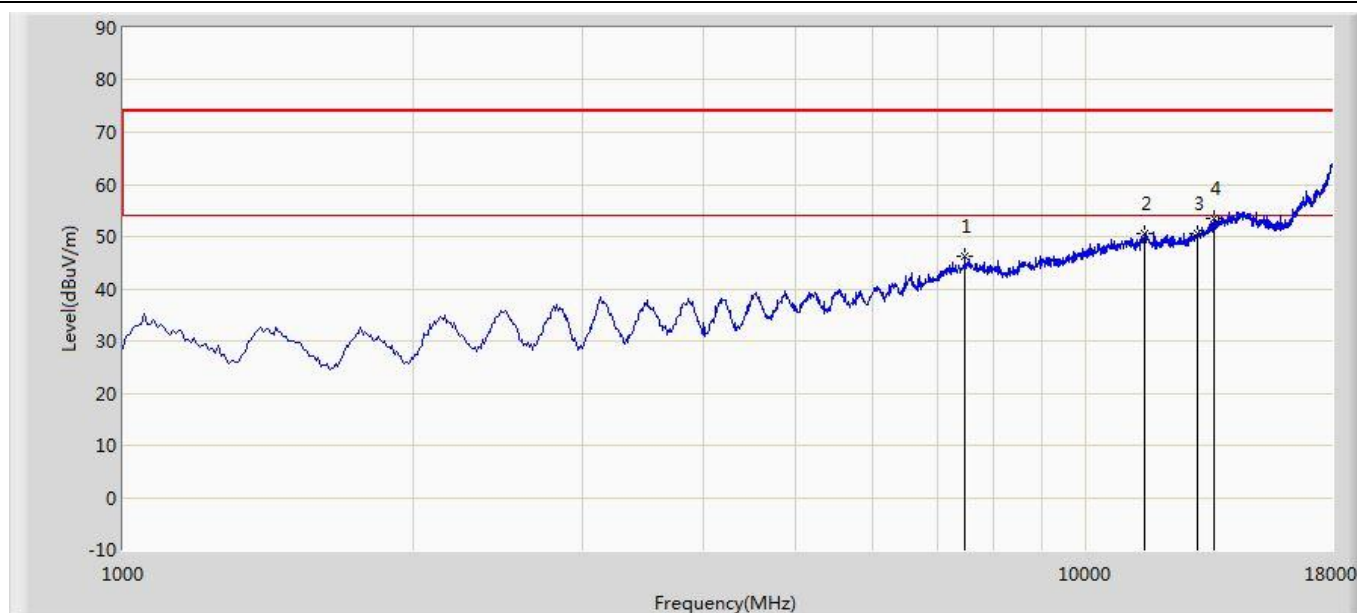


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			7485.500	46.115	33.290	-27.885	74.000	12.825	PK
2			11480.500	50.657	31.350	-23.343	74.000	19.307	PK
3			13027.500	50.481	30.546	-23.519	74.000	19.935	PK
4		*	13588.500	53.561	31.756	-20.439	74.000	21.805	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/11 - 23:31
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

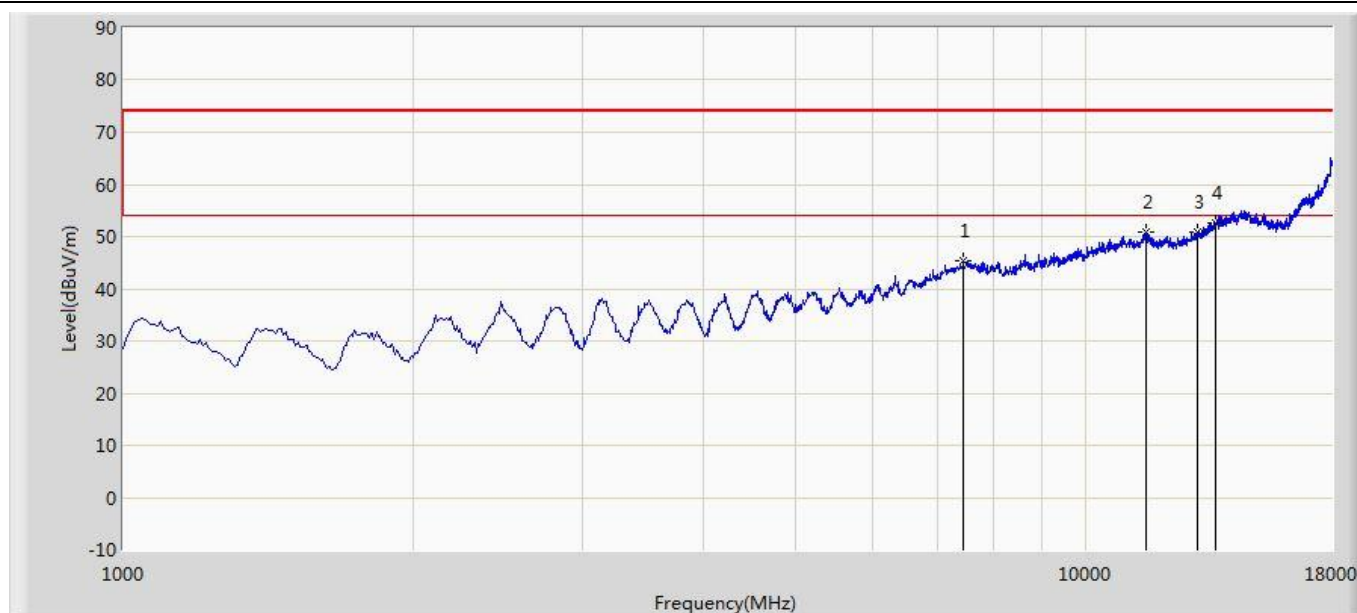


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			7451.500	45.251	32.499	-28.749	74.000	12.753	PK
2			11548.500	51.002	31.554	-22.998	74.000	19.448	PK
3			13036.000	50.804	30.846	-23.196	74.000	19.958	PK
4		*	13648.000	52.622	30.805	-21.378	74.000	21.817	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/11 - 23:34
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)	

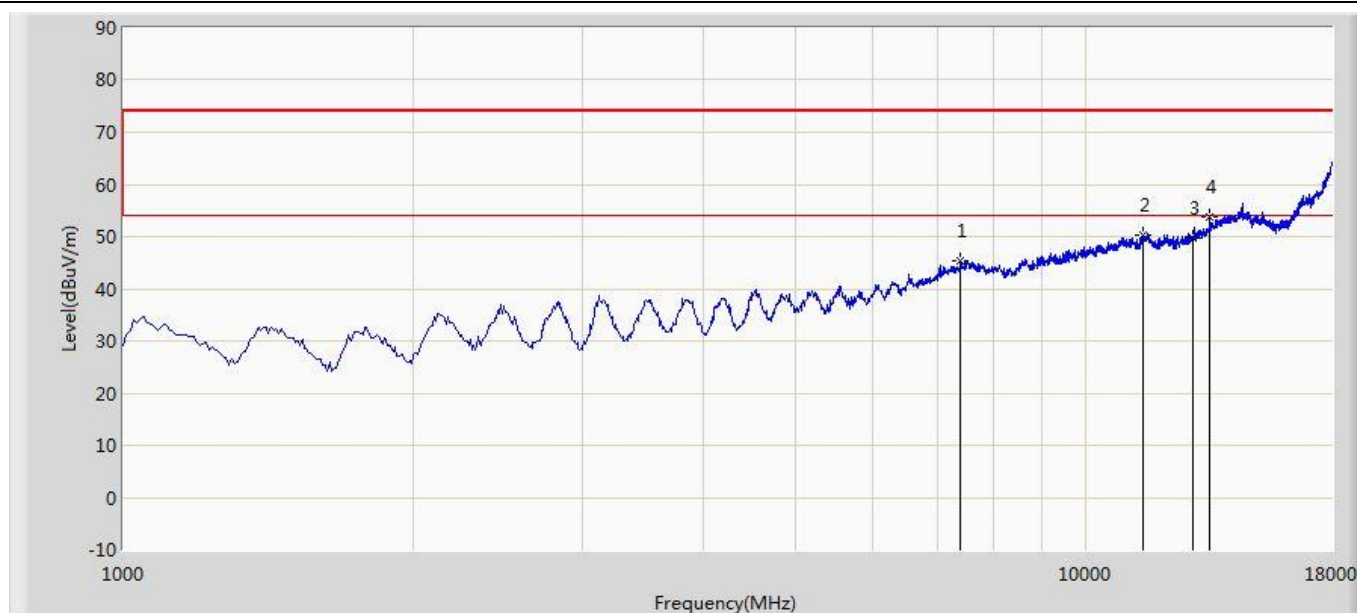


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			7409.000	45.297	32.685	-28.703	74.000	12.612	PK
2			11472.000	50.432	31.148	-23.568	74.000	19.284	PK
3			12891.500	49.709	30.285	-24.291	74.000	19.424	PK
4		*	13427.000	53.762	32.239	-20.238	74.000	21.522	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/11 - 15:23
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT80P+80 at Channel 5530MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

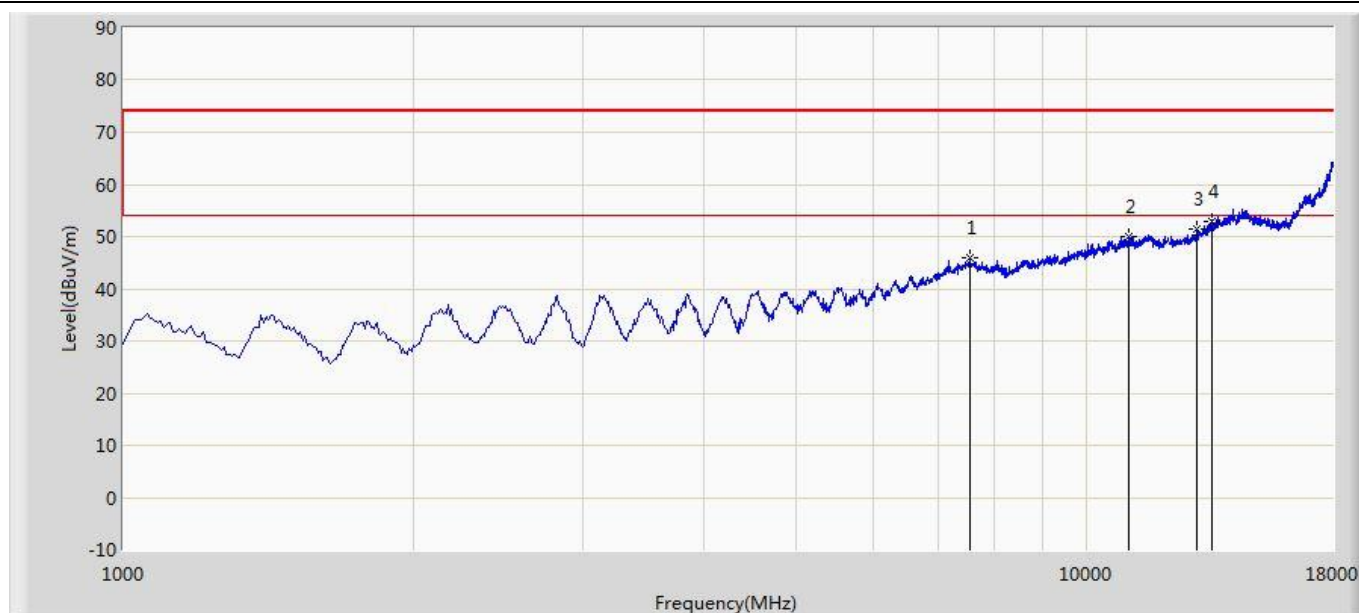


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7562.000	45.894	33.104	-28.106	74.000	12.791	PK
2			11038.500	50.033	31.530	-23.967	74.000	18.502	PK
3			12985.000	51.390	31.572	-22.610	74.000	19.818	PK
4		*	13486.500	53.000	31.277	-21.000	74.000	21.722	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/11 - 15:25
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT80P+80 at Channel 5530MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

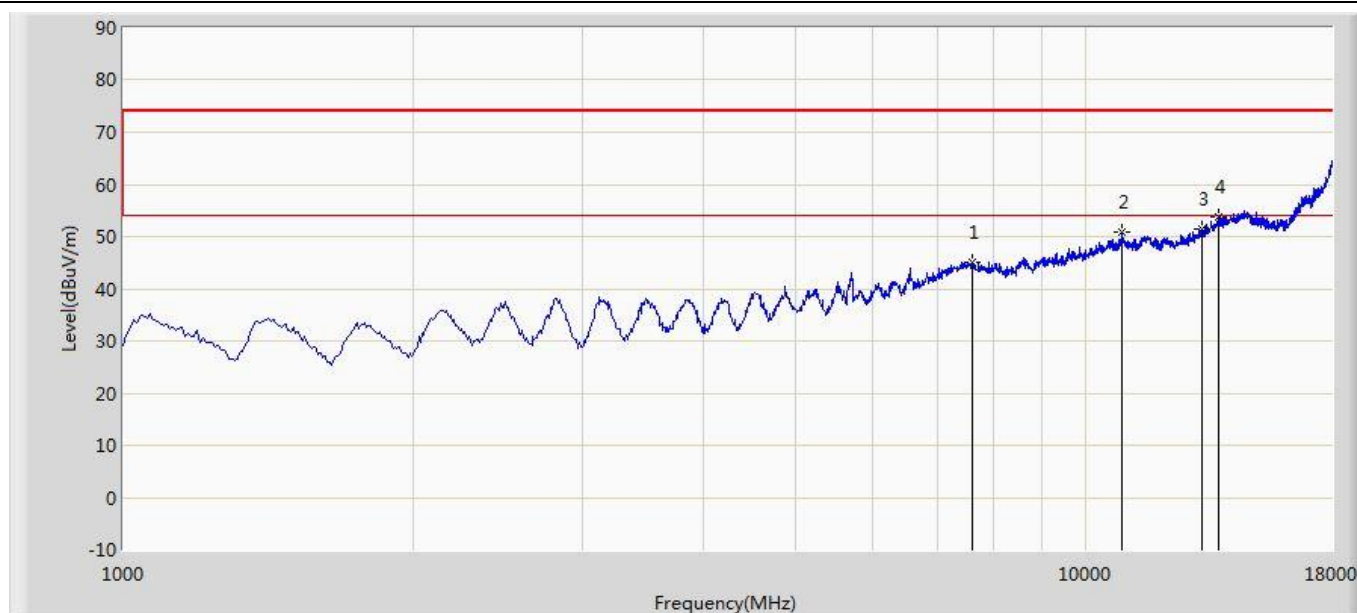


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7630.000	45.129	32.540	-28.871	74.000	12.589	PK
2			10877.000	50.792	32.560	-23.208	74.000	18.232	PK
3			13197.500	51.400	31.111	-22.600	74.000	20.290	PK
4		*	13741.500	53.702	31.692	-20.298	74.000	22.011	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/11 - 15:02
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT80P+80 at Channel 5530MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

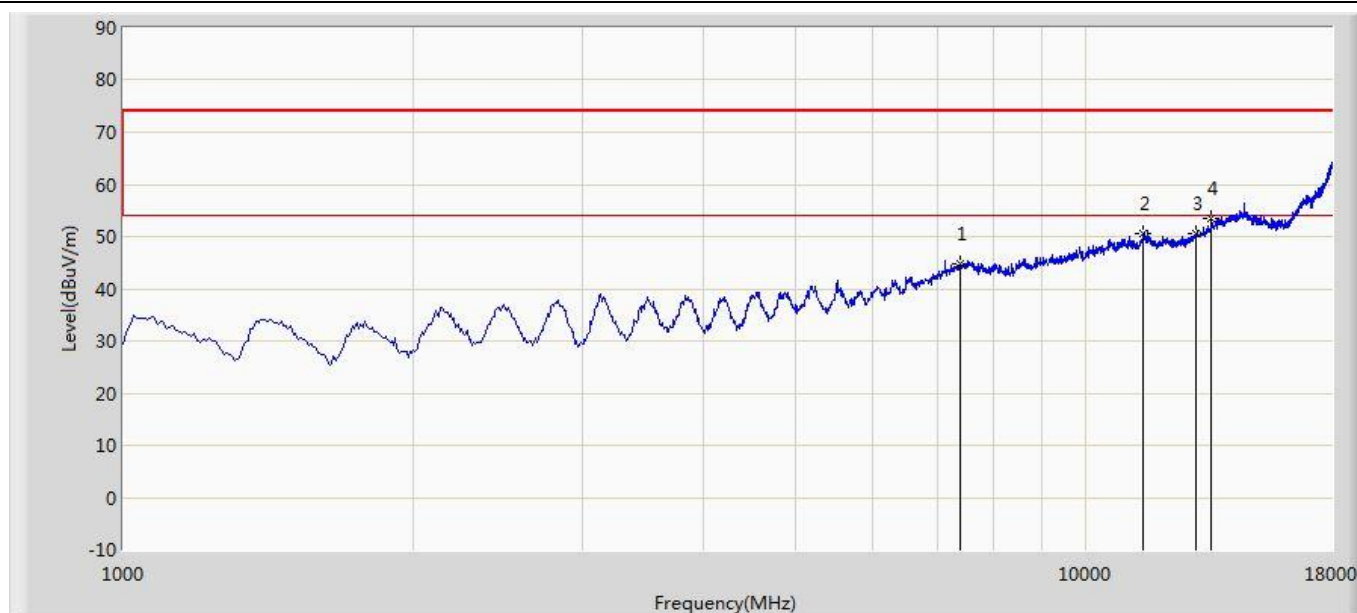


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7392.000	44.910	32.356	-29.090	74.000	12.554	PK
2			11472.000	50.600	31.316	-23.400	74.000	19.284	PK
3			12985.100	50.520	30.702	-23.480	74.000	19.818	PK
4		*	13461.200	53.400	31.756	-20.600	74.000	21.643	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/11 - 15:03
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT80P+80 at Channel 5530MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

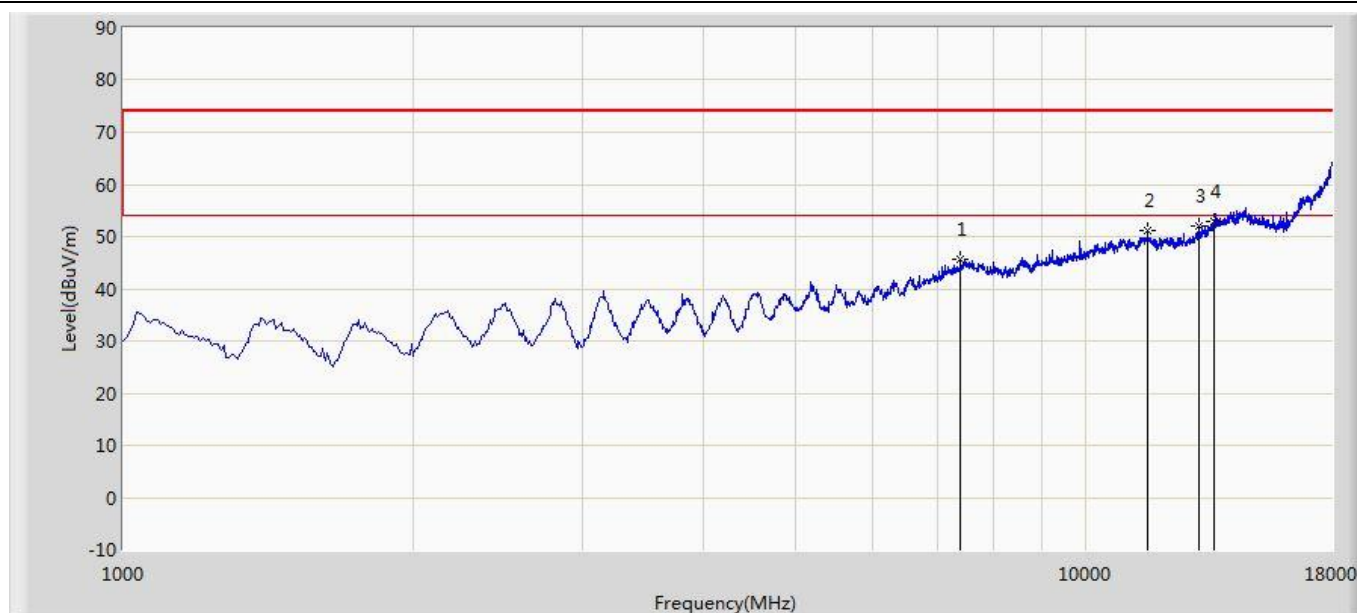


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7409.000	45.620	33.008	-28.380	74.000	12.612	PK
2			11565.500	51.078	31.622	-22.922	74.000	19.456	PK
3			13121.210	51.930	31.832	-22.070	74.000	20.099	PK
4		*	13580.000	52.831	31.013	-21.169	74.000	21.817	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/11 - 15:04
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT160 at Channel 5250MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

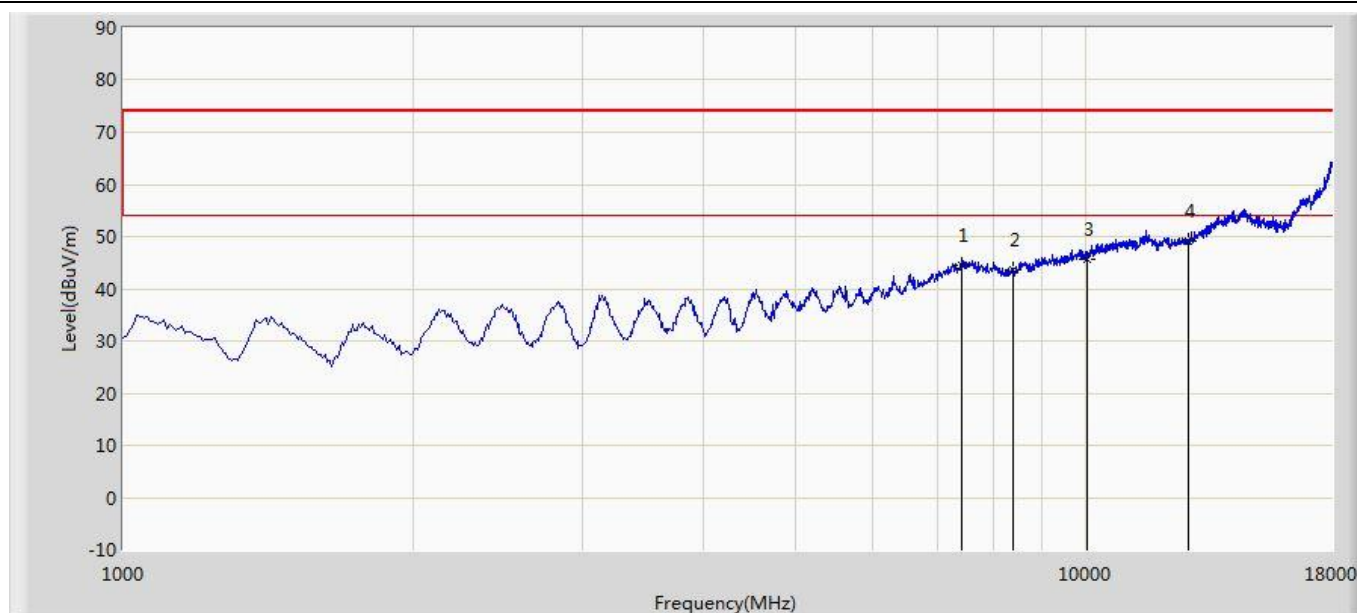


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7434.500	44.390	31.690	-29.610	74.000	12.700	PK
2			8386.520	43.520	31.389	-30.480	74.000	12.131	PK
3			10018.530	45.601	30.178	-28.399	74.000	15.423	PK
4		*	12781.302	49.013	29.994	-24.987	74.000	19.020	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/09/11 - 15:05
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT160 at Channel 5250MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

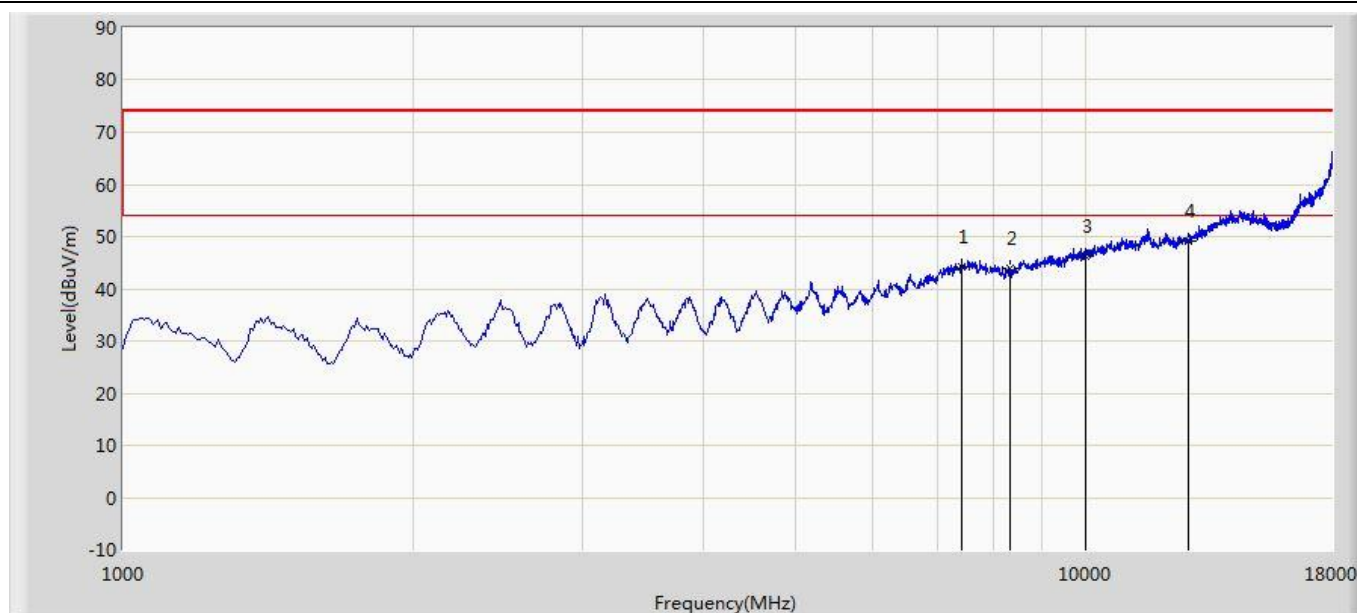

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7434.503	44.340	31.640	-29.660	74.000	12.700	PK
2			8352.511	43.802	31.819	-30.198	74.000	11.982	PK
3			9993.000	46.103	30.739	-27.897	74.000	15.364	PK
4		*	12781.140	49.050	30.031	-24.950	74.000	19.019	PK


Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)



5GHz Wi-Fi Model: APEX0377

Site: AC1	Time: 2017/08/19 - 01:52
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11a at Channel 5500MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

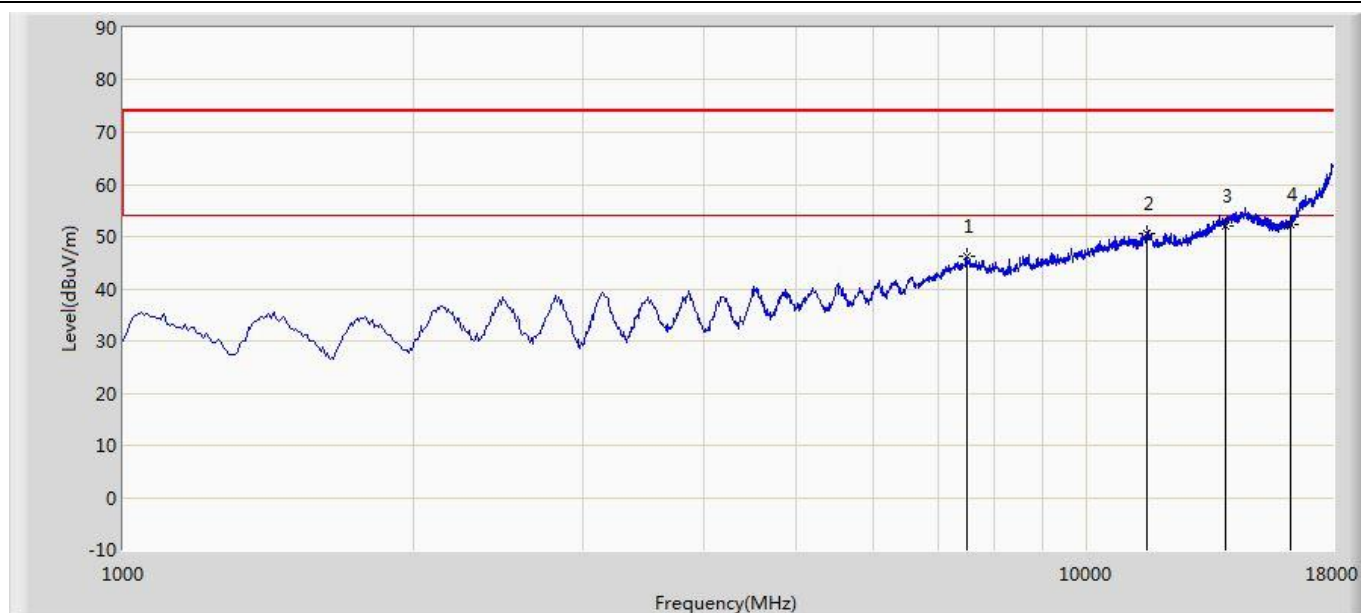


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7502.500	46.282	33.437	-27.718	74.000	12.845	PK
2			11540.130	50.710	31.272	-23.290	74.000	19.438	PK
3			13928.520	52.060	29.638	-21.940	74.000	22.422	PK
4		*	16274.500	52.300	31.335	-21.700	74.000	20.965	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/19 - 02:03
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11a at Channel 5500MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

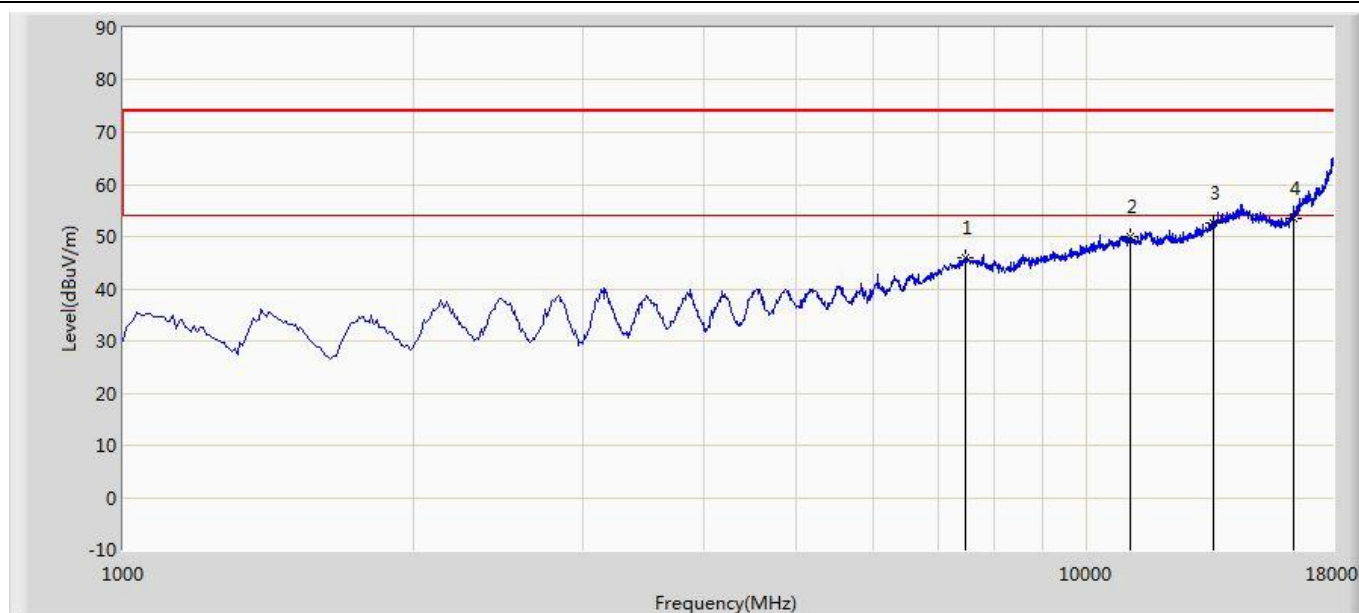


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7477.000	45.800	32.992	-28.200	74.000	12.808	PK
2			11106.500	50.100	31.489	-23.900	74.000	18.610	PK
3			13546.000	52.500	30.646	-21.500	74.000	21.855	PK
4		*	16376.500	53.500	32.111	-20.500	74.000	21.389	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/19 - 02:05
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11a at Channel 5580MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

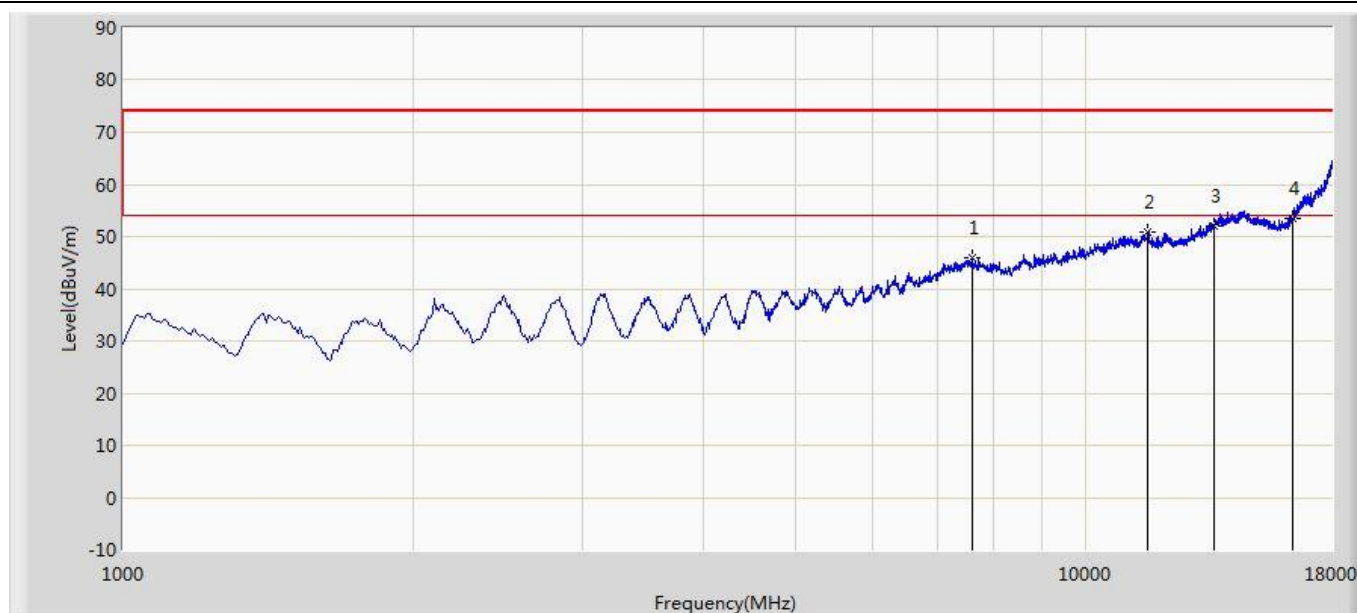


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7604.500	45.800	33.135	-28.200	74.000	12.665	PK
2			11574.000	50.900	31.444	-23.100	74.000	19.456	PK
3			13571.521	52.104	30.274	-21.896	74.000	21.830	PK
4		*	16376.543	53.530	32.141	-20.470	74.000	21.390	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/19 - 02:06
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11a at Channel 5580MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

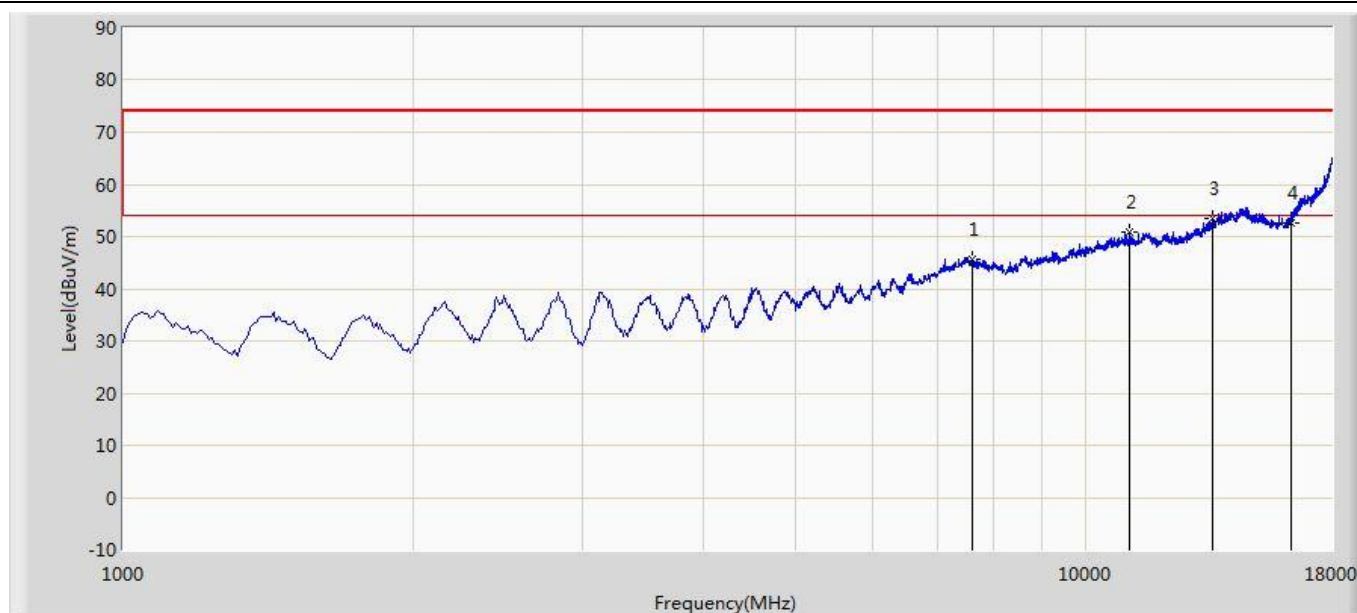


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7604.520	45.793	33.128	-28.207	74.000	12.664	PK
2			11081.000	50.950	32.379	-23.050	74.000	18.571	PK
3		*	13520.500	53.400	31.595	-20.600	74.000	21.804	PK
4			16351.000	52.720	31.442	-21.280	74.000	21.279	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/19 - 02:24
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11n-HT20 at Channel 5260MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

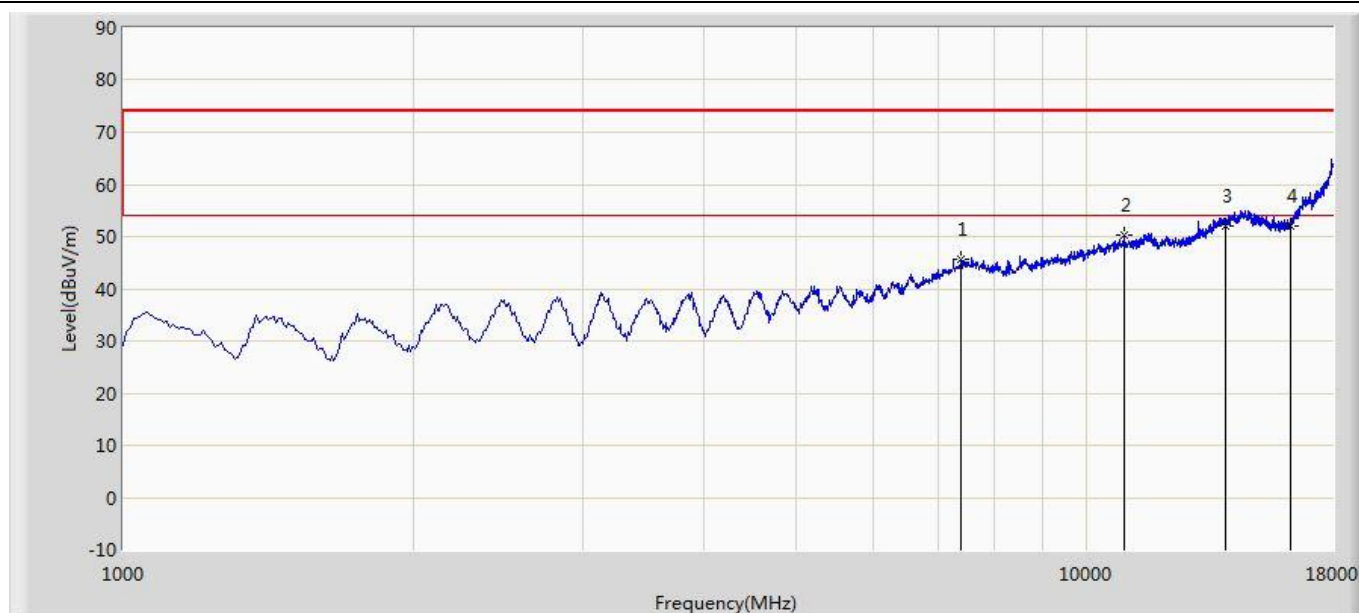


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7400.500	45.789	33.205	-28.211	74.000	12.584	PK
2			10928.000	50.159	31.769	-23.841	74.000	18.389	PK
3			13903.000	51.940	29.602	-22.060	74.000	22.338	PK
4		*	16274.500	52.068	31.103	-21.932	74.000	20.965	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/19 - 02:25
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11n-HT20 at Channel 5260MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

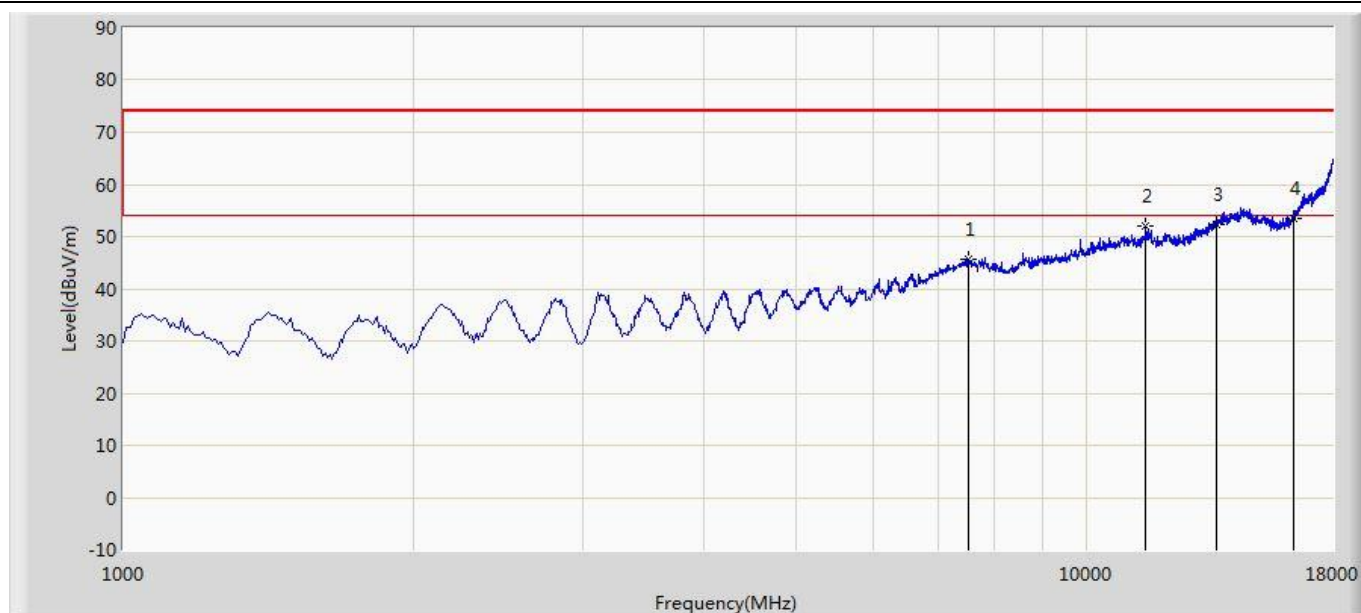


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7536.500	45.710	32.876	-28.290	74.000	12.834	PK
2			11497.500	51.896	32.548	-22.104	74.000	19.347	PK
3			13648.000	52.200	30.383	-21.800	74.000	21.817	PK
4		*	16376.500	53.400	32.011	-20.600	74.000	21.389	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/19 - 03:00
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11n-HT40 at Channel 5710MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

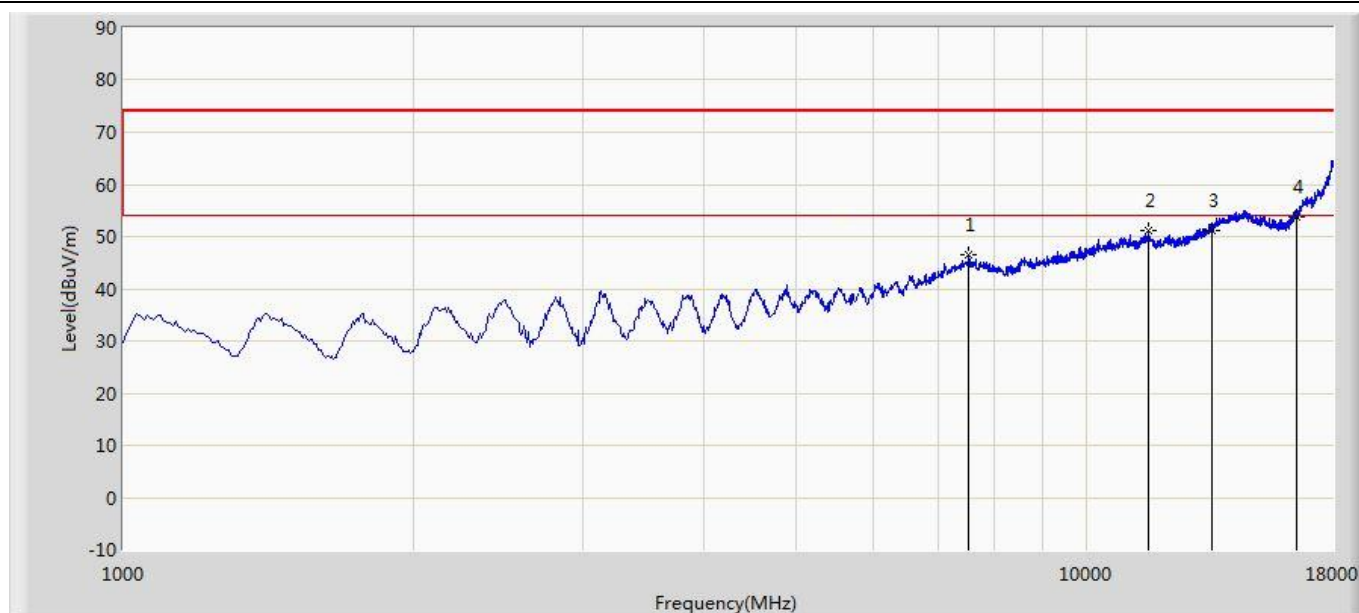


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7536.500	46.400	33.566	-27.600	74.000	12.834	PK
2			11582.500	51.100	31.645	-22.900	74.000	19.456	PK
3			13486.500	51.300	29.577	-22.700	74.000	21.722	PK
4		*	16512.500	53.700	31.759	-20.300	74.000	21.941	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/19 - 03:01
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11n-HT40 at Channel 5710MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

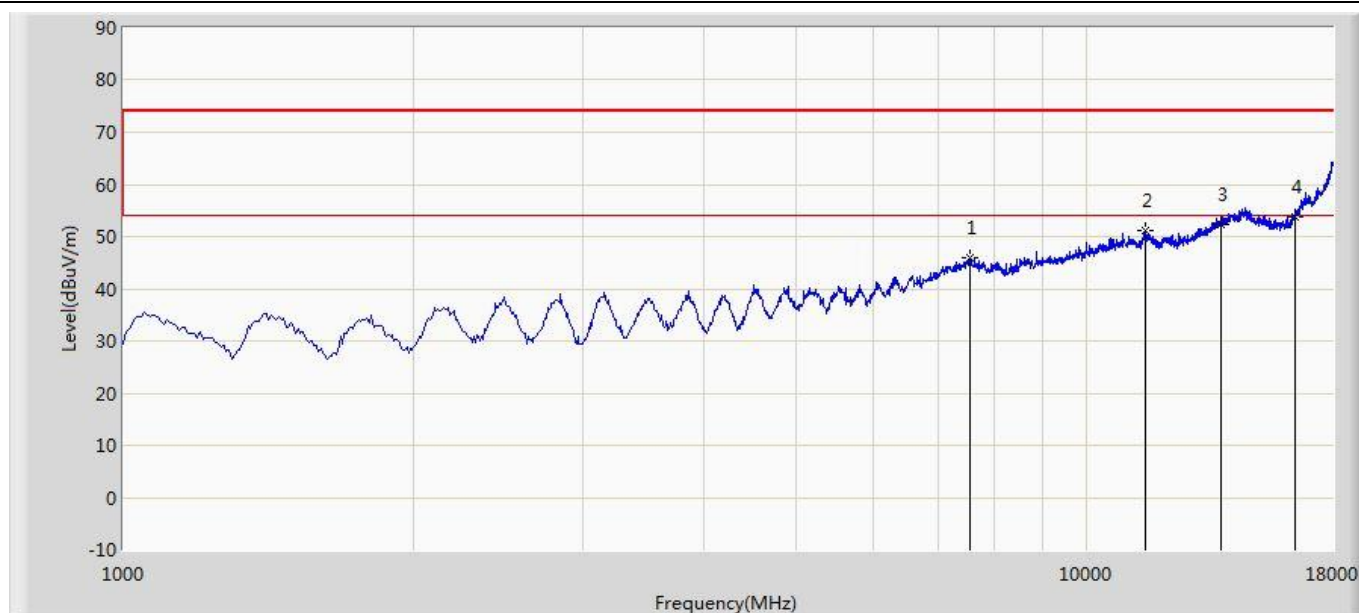


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7562.000	45.800	33.010	-28.200	74.000	12.791	PK
2			11506.000	51.100	31.728	-22.900	74.000	19.371	PK
3			13792.500	52.400	30.326	-21.600	74.000	22.074	PK
4		*	16436.000	53.700	32.127	-20.300	74.000	21.573	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/19 - 03:18
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

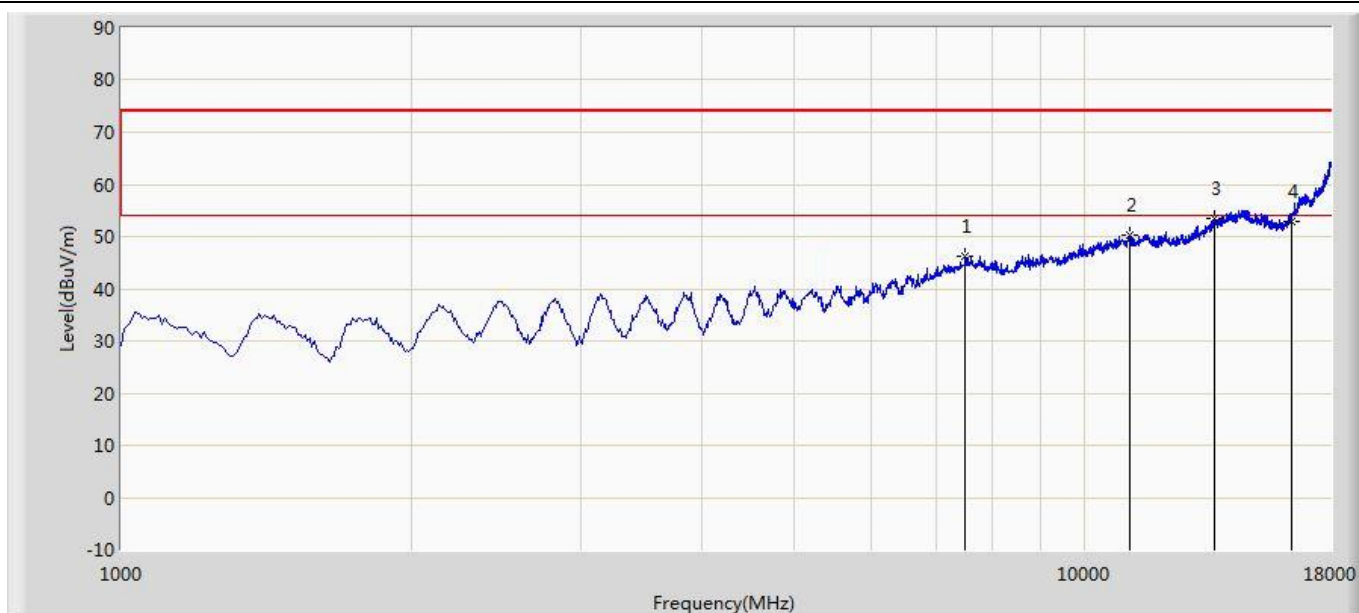


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7519.500	46.200	33.356	-27.800	74.000	12.844	PK
2			11132.000	50.300	31.660	-23.700	74.000	18.640	PK
3		*	13605.500	53.400	31.609	-20.600	74.000	21.791	PK
4			16359.500	52.800	31.485	-21.200	74.000	21.315	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/19 - 03:19
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

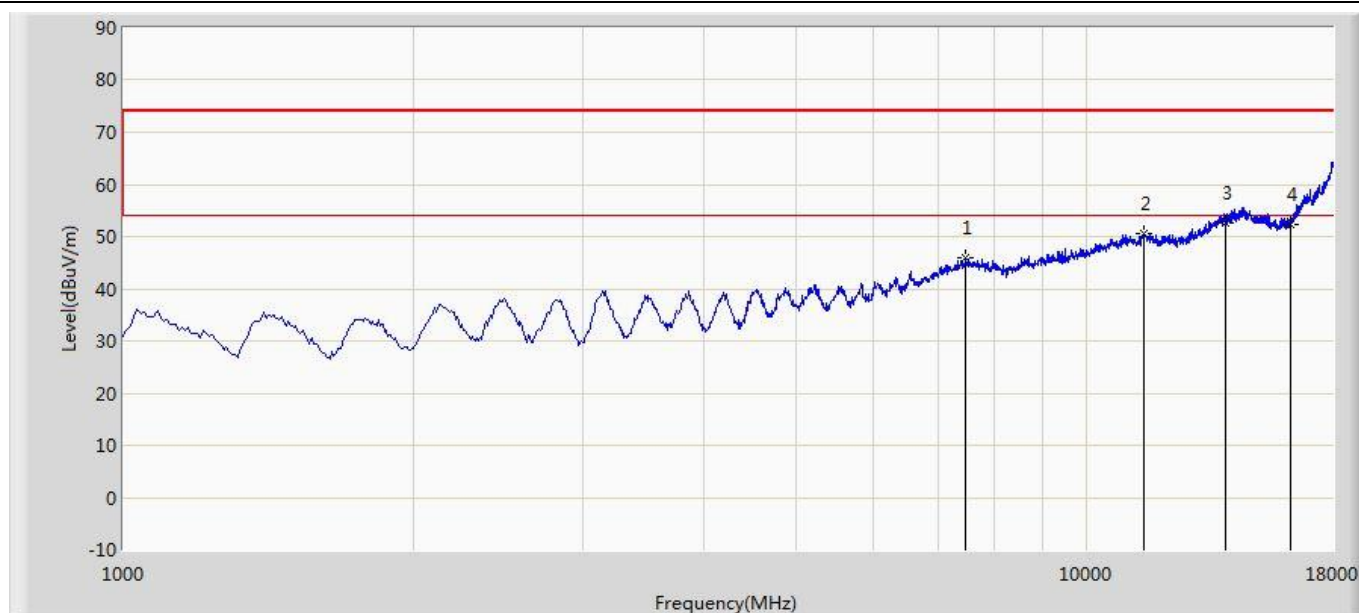


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7485.500	46.000	33.175	-28.000	74.000	12.825	PK
2			11446.500	50.600	31.388	-23.400	74.000	19.212	PK
3		*	13920.000	52.610	30.217	-21.390	74.000	22.393	PK
4			16274.500	52.404	31.439	-21.596	74.000	20.965	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/19 - 03:57
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5550MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

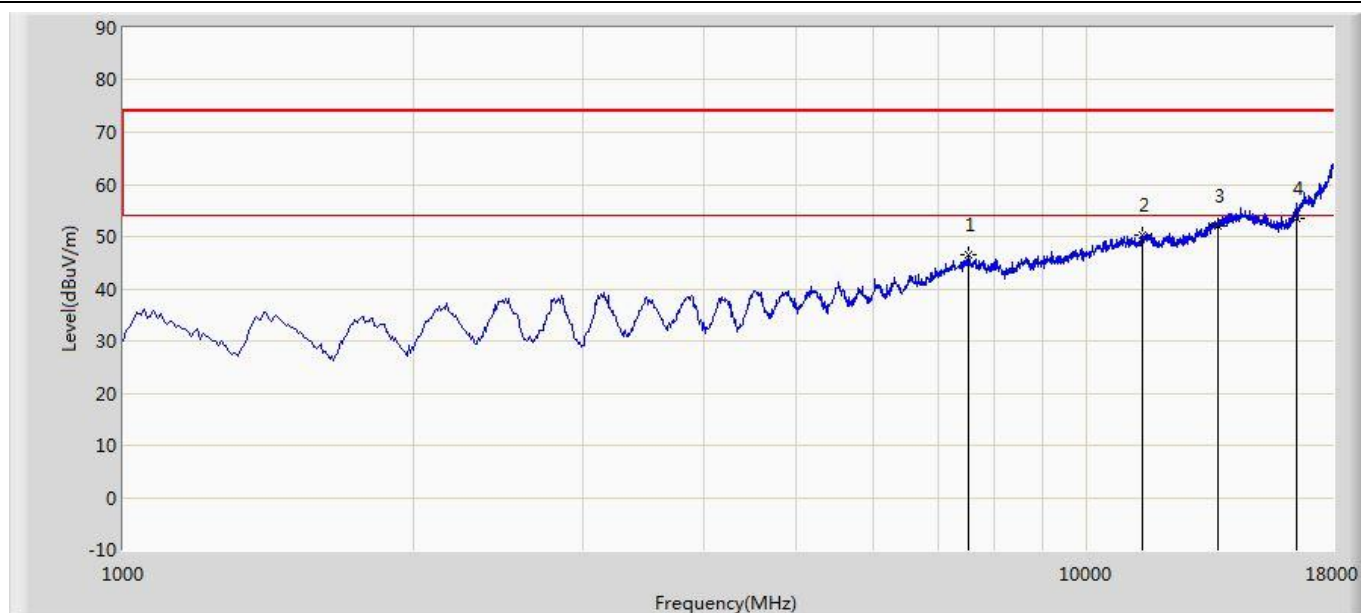


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7545.000	46.500	33.671	-27.500	74.000	12.829	PK
2			11412.501	50.214	31.087	-23.786	74.000	19.127	PK
3			13665.000	52.104	30.242	-21.896	74.000	21.861	PK
4		*	16504.000	53.514	31.614	-20.486	74.000	21.900	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/19 - 03:58
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5550MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

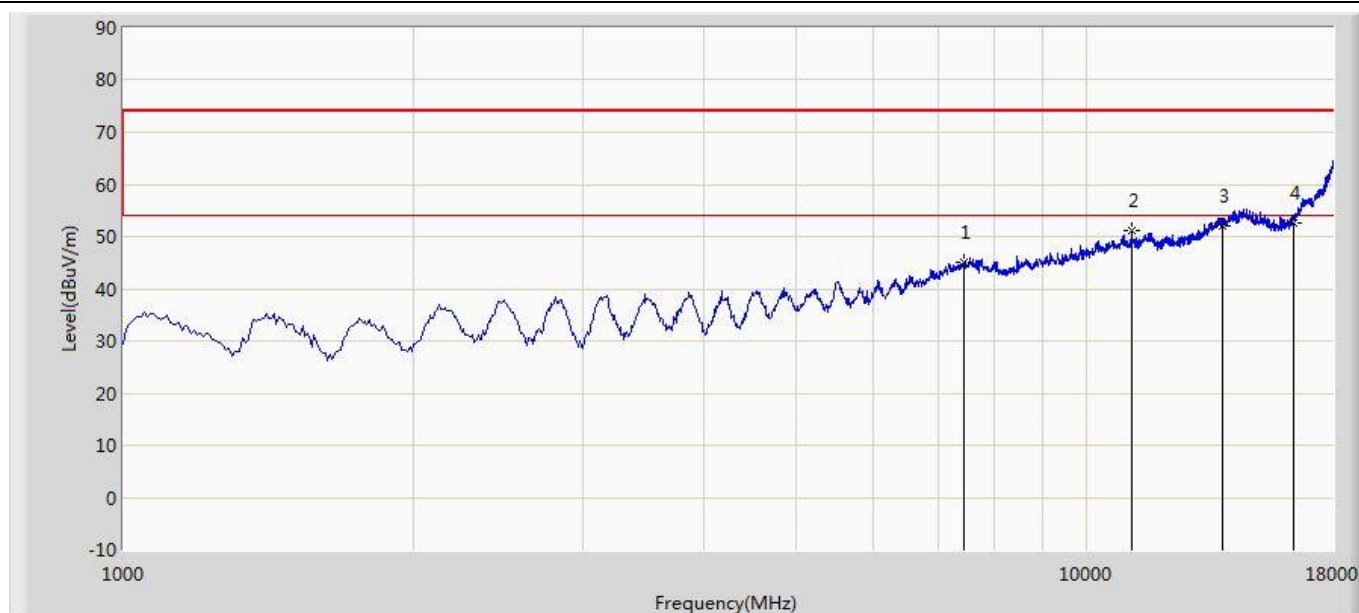


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7443.000	45.103	32.375	-28.897	74.000	12.728	PK
2			11140.500	51.304	32.654	-22.696	74.000	18.650	PK
3			13809.500	51.900	29.783	-22.100	74.000	22.117	PK
4		*	16410.500	52.700	31.186	-21.300	74.000	21.513	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/19 - 04:15
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

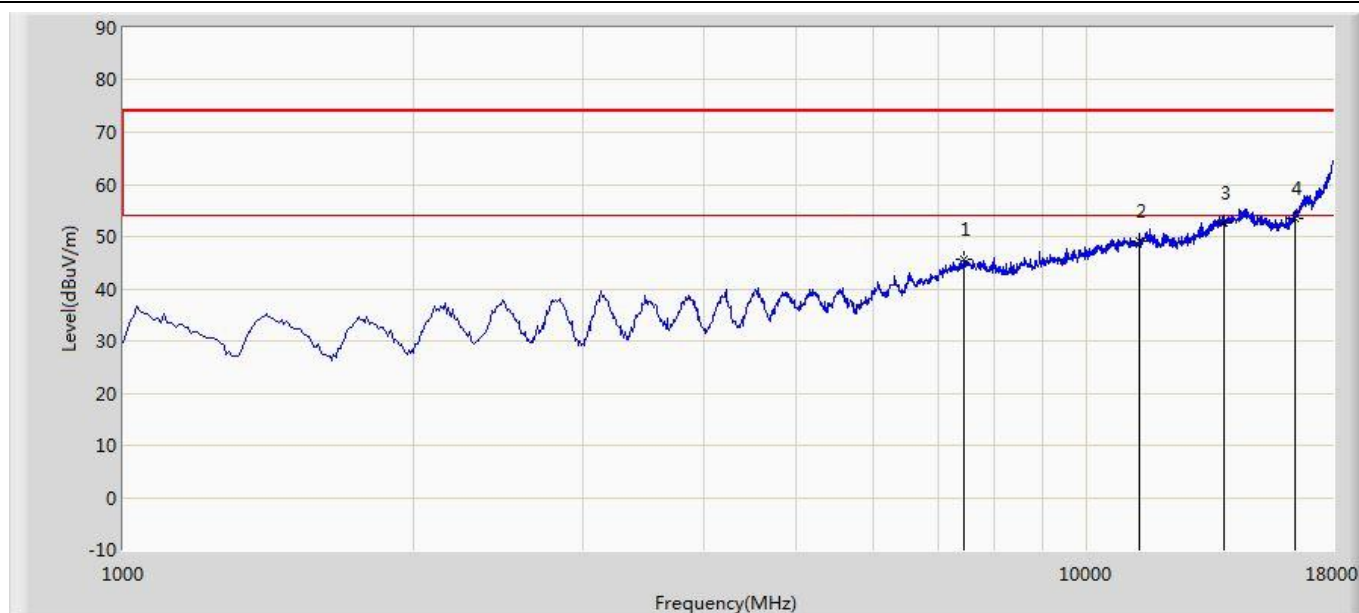


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7460.000	45.700	32.926	-28.300	74.000	12.774	PK
2			11327.500	49.200	30.263	-24.800	74.000	18.937	PK
3			13860.500	52.600	30.326	-21.400	74.000	22.273	PK
4		*	16461.500	53.500	31.832	-20.500	74.000	21.668	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/19 - 04:17
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

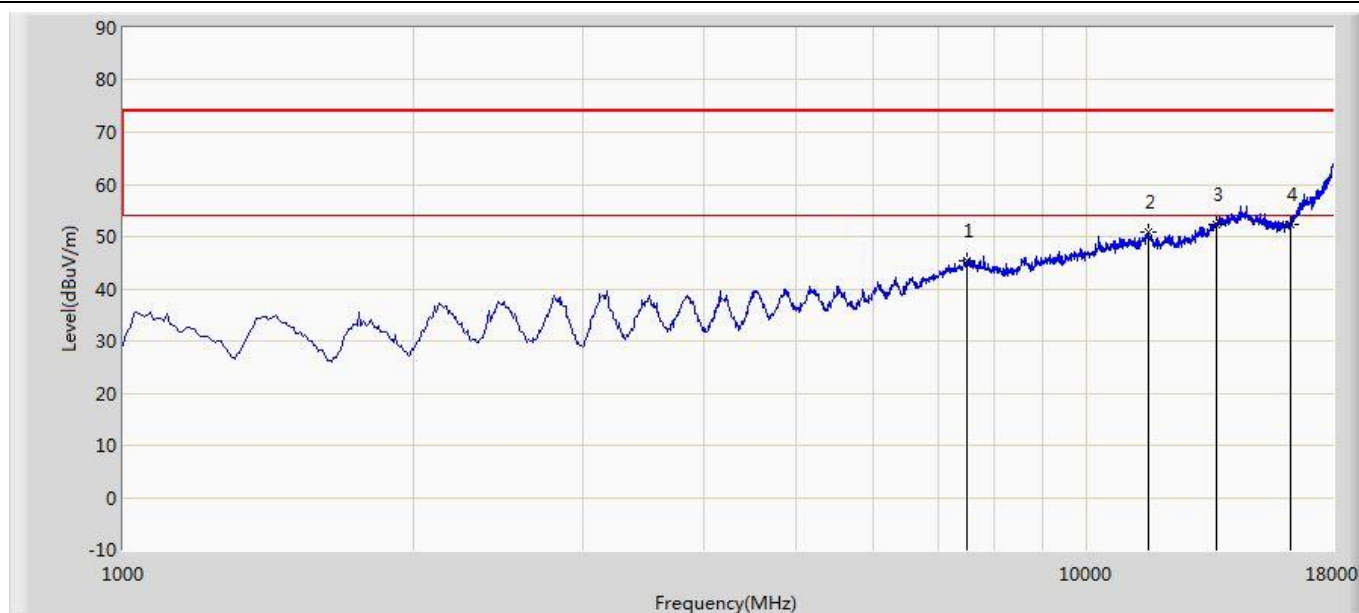


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7502.500	45.395	32.550	-28.605	74.000	12.845	PK
2			11582.500	50.900	31.445	-23.100	74.000	19.456	PK
3		*	13614.000	52.210	30.414	-21.790	74.000	21.795	PK
4			16274.500	52.200	31.235	-21.800	74.000	20.965	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/19 - 04:07
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5290MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

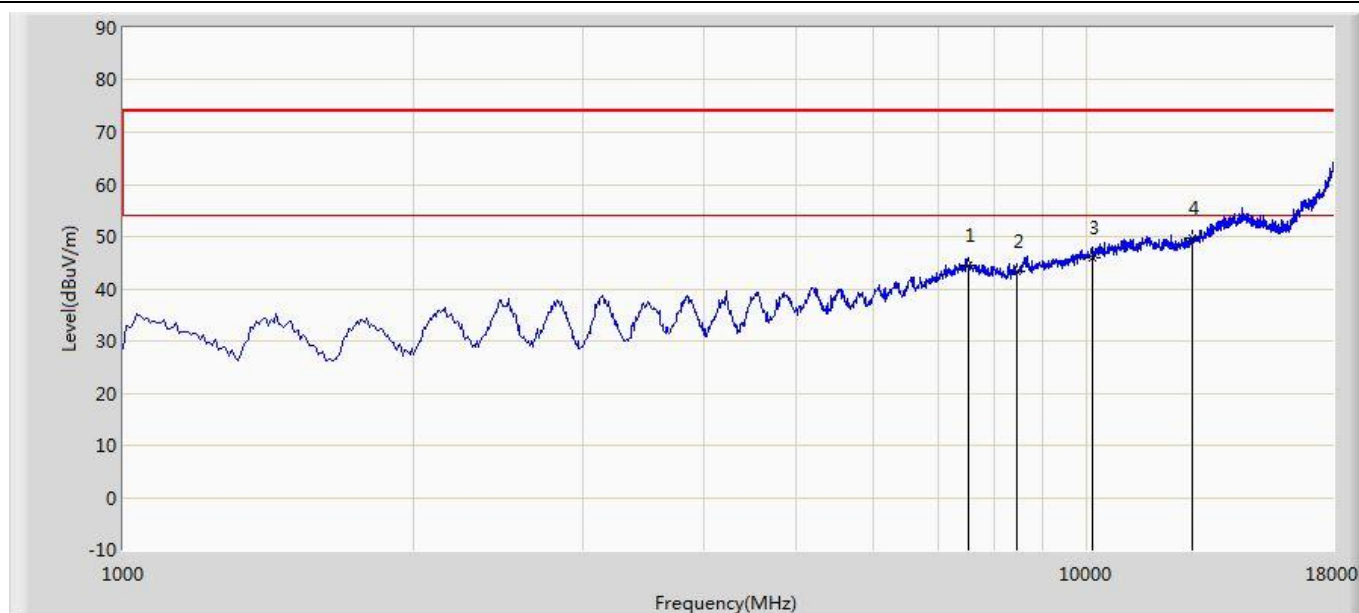


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7536.500	44.500	31.666	-29.500	74.000	12.834	PK
2			8463.000	43.300	30.721	-30.700	74.000	12.579	PK
3			10120.500	45.900	30.070	-28.100	74.000	15.829	PK
4		*	12840.500	49.800	30.594	-24.200	74.000	19.206	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/19 - 04:09
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5290MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

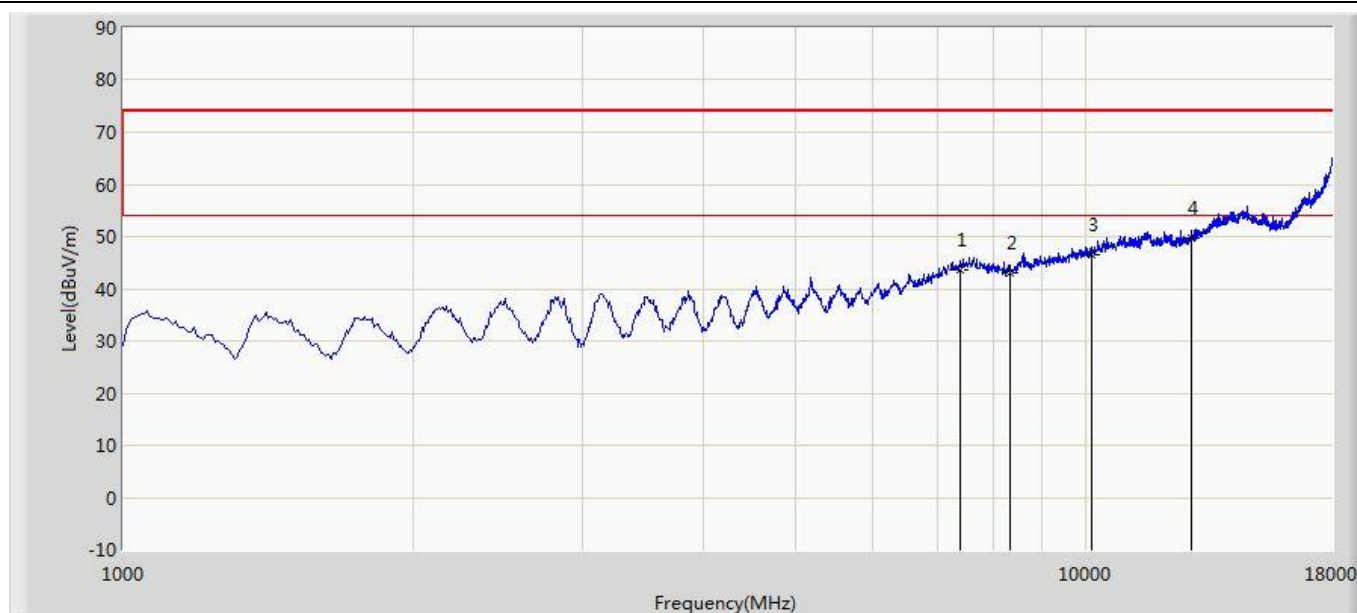


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7400.500	43.700	31.116	-30.300	74.000	12.584	PK
2			8352.500	43.000	31.017	-31.000	74.000	11.982	PK
3			10120.500	46.600	30.770	-27.400	74.000	15.829	PK
4		*	12840.500	49.800	30.594	-24.200	74.000	19.206	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/19 - 04:03
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5690MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

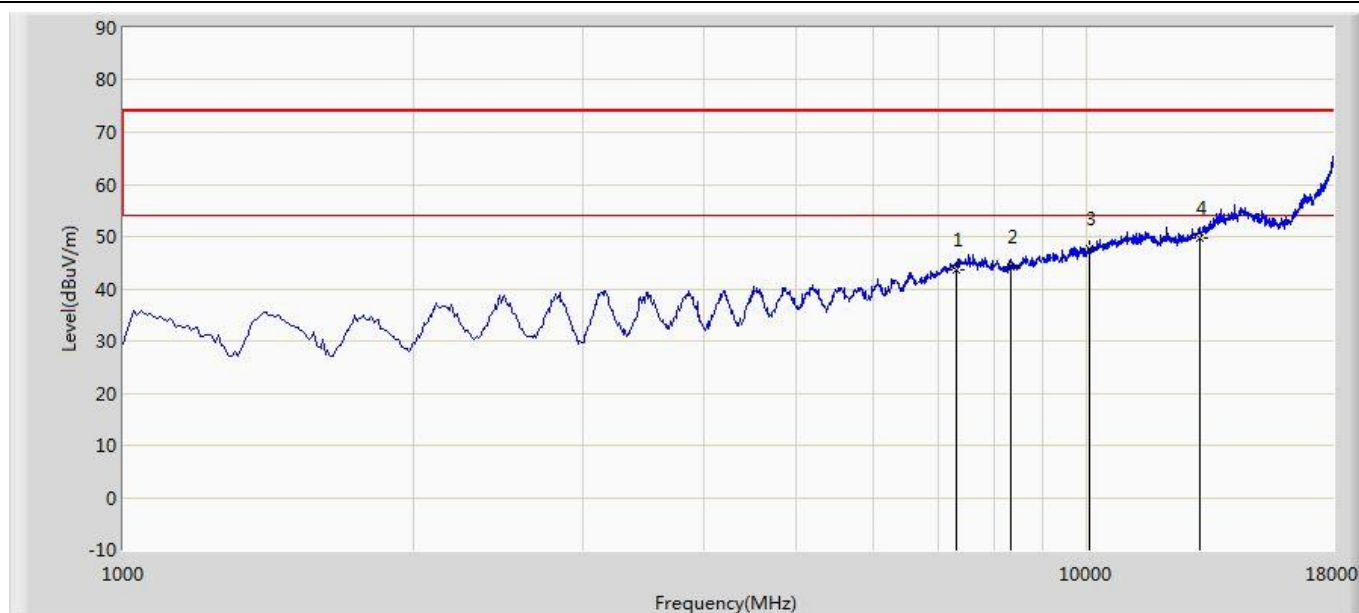


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7332.500	43.700	31.321	-30.300	74.000	12.379	PK
2			8344.000	44.300	32.341	-29.700	74.000	11.959	PK
3			10052.500	47.700	32.175	-26.300	74.000	15.525	PK
4		*	13095.500	49.800	29.726	-24.200	74.000	20.074	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/19 - 04:05
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5690MHz Ant 0 + 1 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

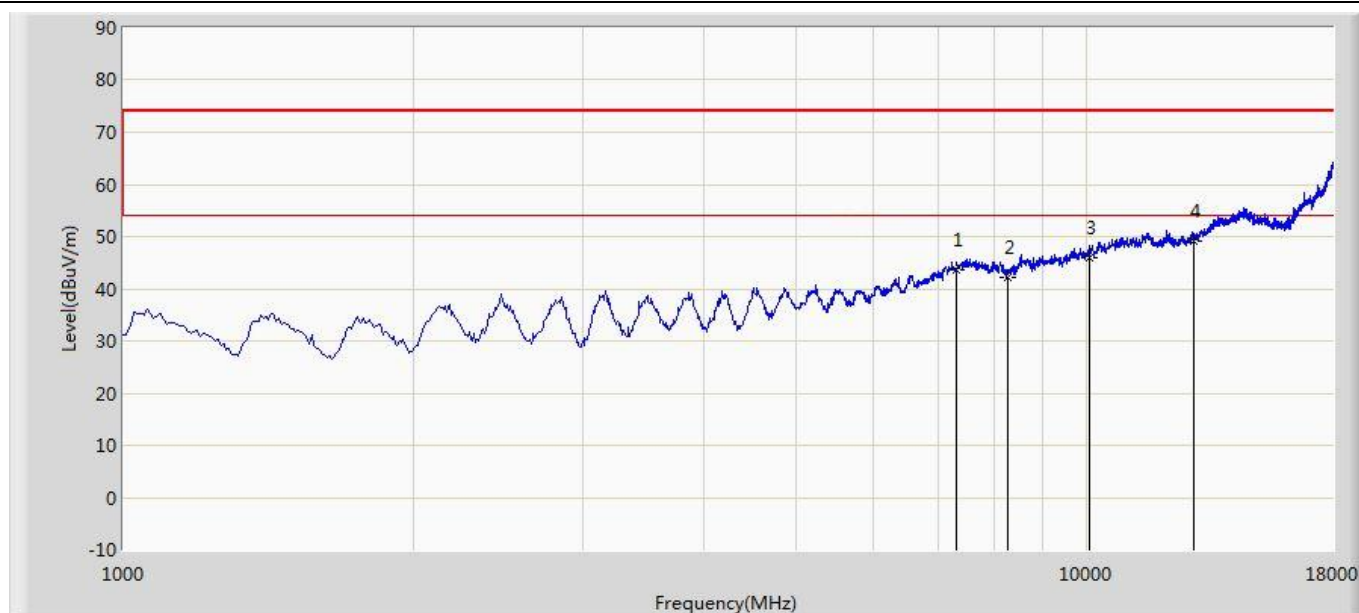


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7332.500	43.700	31.321	-30.300	74.000	12.379	PK
2			8276.043	42.200	30.315	-31.800	74.000	11.885	PK
3			10052.500	46.000	30.475	-28.000	74.000	15.525	PK
4		*	12891.500	49.200	29.776	-24.800	74.000	19.424	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/19 - 04:02
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5775MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

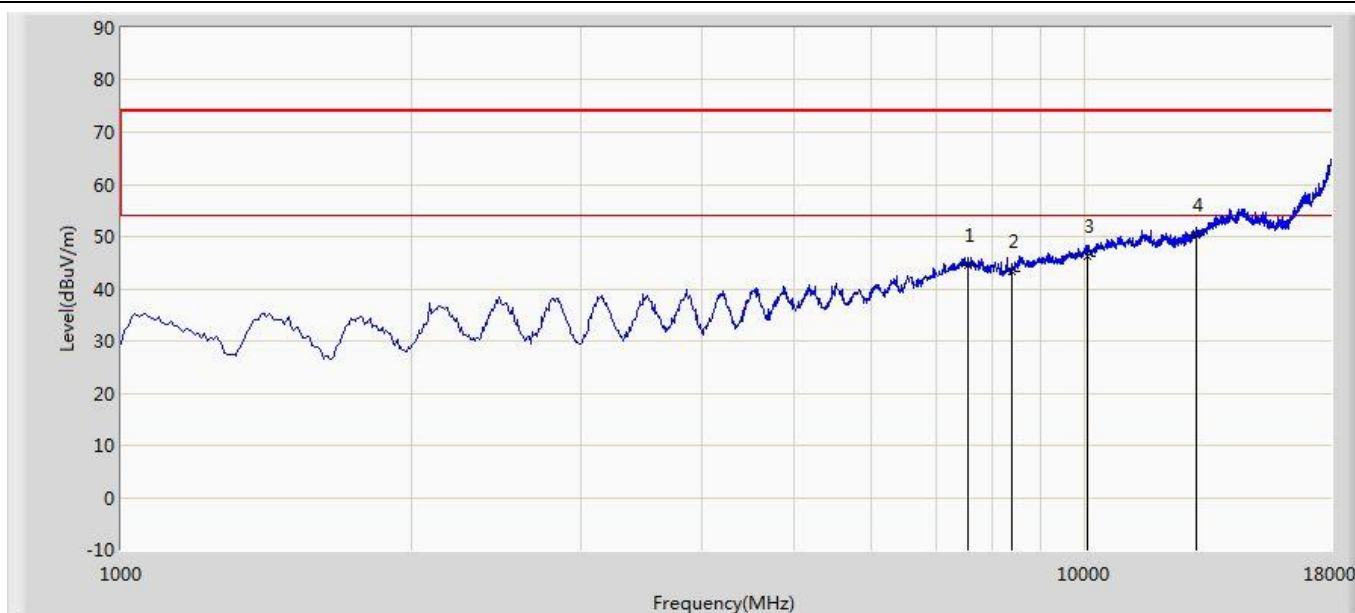


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7570.500	44.402	31.636	-29.598	74.000	12.766	PK
2			8386.500	43.400	31.269	-30.600	74.000	12.131	PK
3			10078.000	46.100	30.470	-27.900	74.000	15.630	PK
4		*	13070.000	50.400	30.369	-23.600	74.000	20.031	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/19 - 04:03
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT80+80 at Channel 5775MHz Ant 2 + 3 / Ant 0 + 1 + 2 + 3 (CDD Mode)	

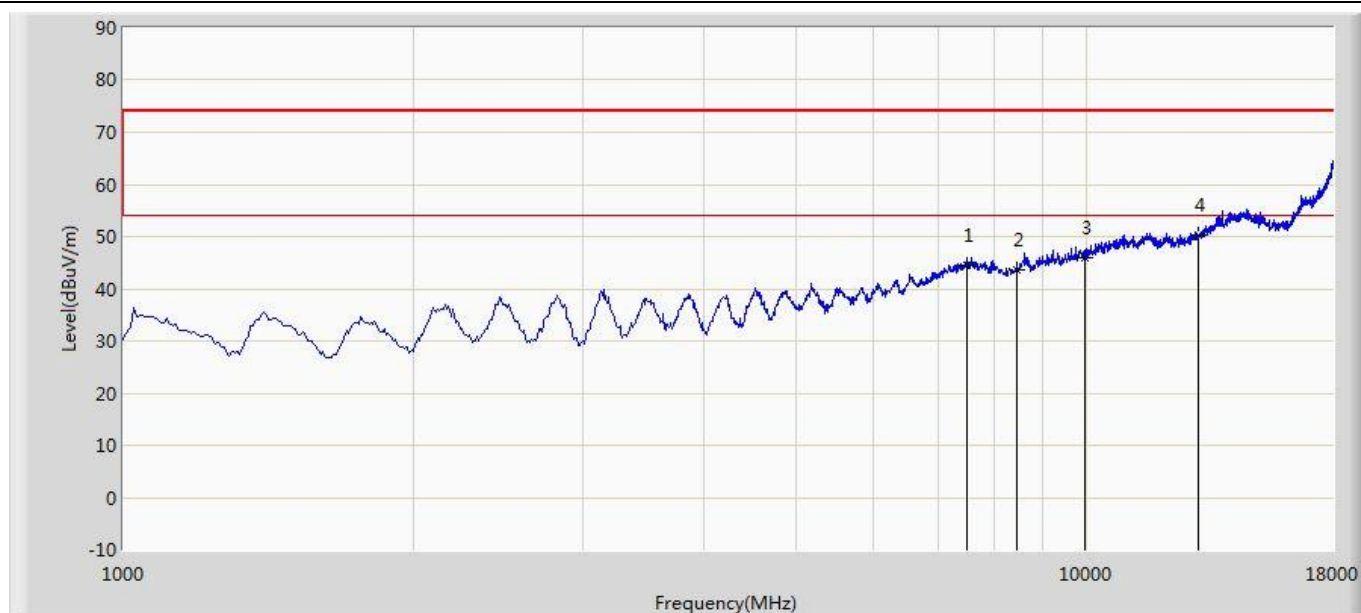


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7502.500	44.500	31.655	-29.500	74.000	12.845	PK
2			8462.040	43.500	30.927	-30.500	74.000	12.573	PK
3			9942.040	46.000	30.684	-28.000	74.000	15.316	PK
4		*	13070.000	50.400	30.369	-23.600	74.000	20.031	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/19 - 04:01
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT160 at Channel 5250MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

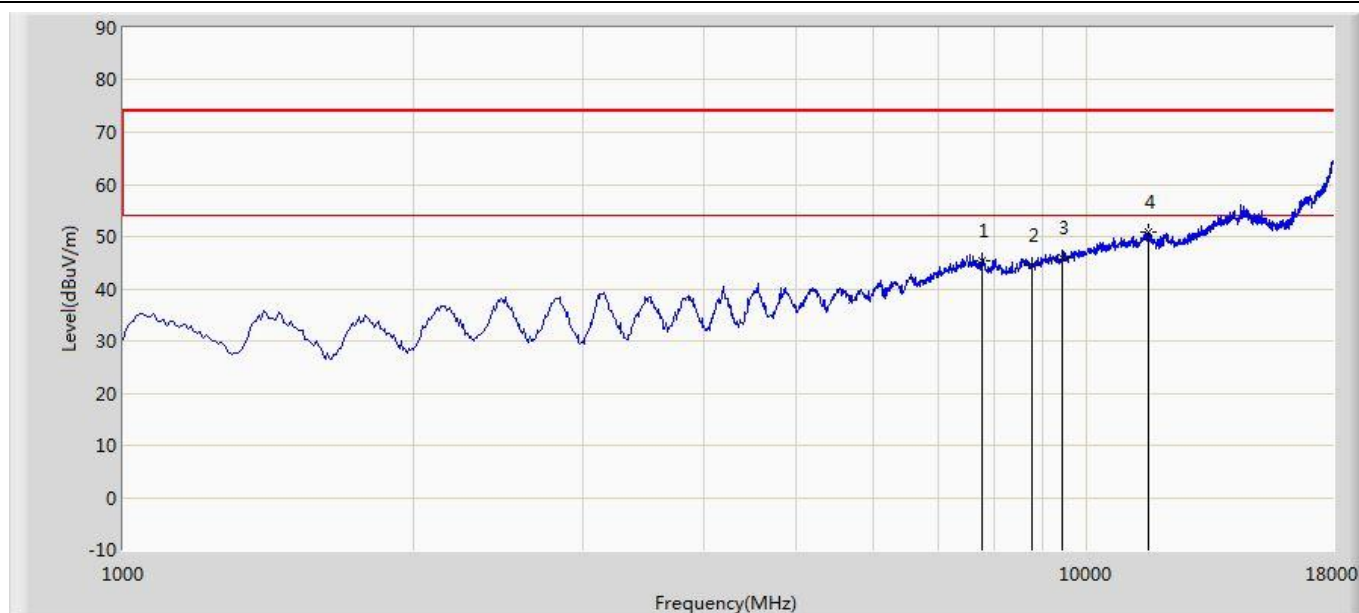


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7791.500	45.400	33.014	-28.600	74.000	12.386	PK
2			8760.500	44.500	30.583	-29.500	74.000	13.917	PK
3			9432.040	45.900	31.460	-28.100	74.000	14.440	PK
4		*	11565.500	50.900	31.444	-23.100	74.000	19.456	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2017/08/19 - 04:02
Limit: RSS_GEN_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: DC 57V (POE)
Test Mode: Transmit by 802.11ac-VHT160 at Channel 5250MHz Ant 0 + 1 + 2 + 3 (CDD Mode)	

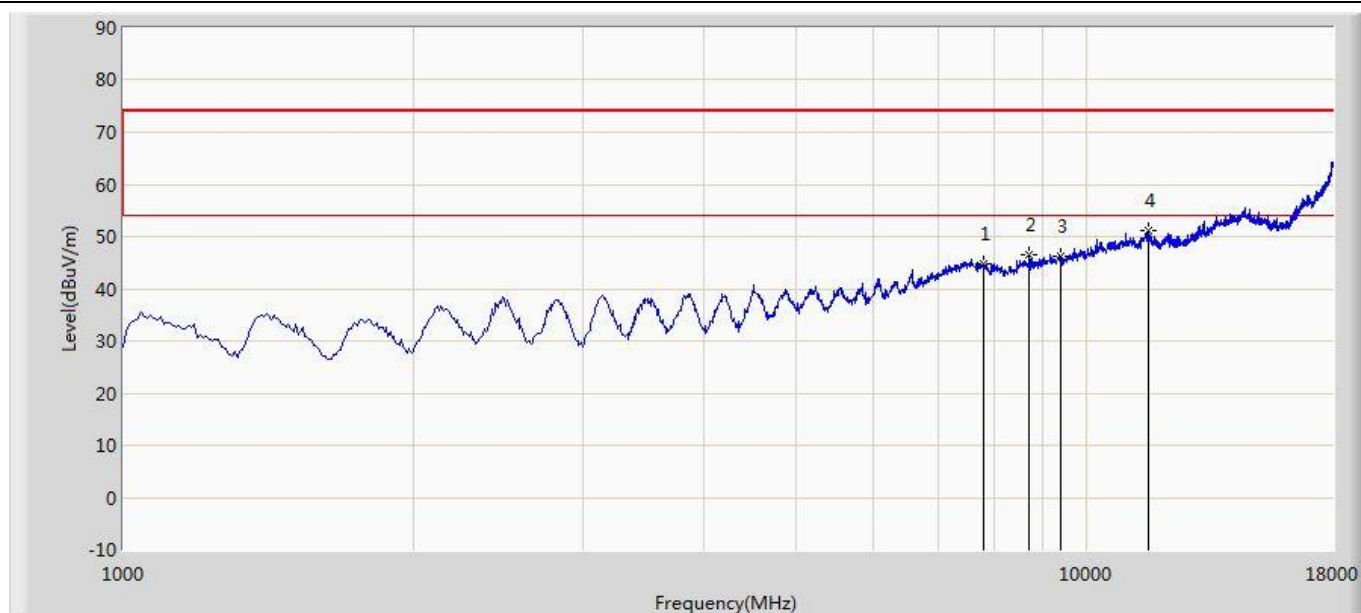

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7808.500	44.900	32.514	-29.100	74.000	12.386	PK
2			8692.500	46.600	32.874	-27.400	74.000	13.726	PK
3			9406.500	46.100	31.626	-27.900	74.000	14.473	PK
4		*	11591.000	51.300	31.847	-22.700	74.000	19.453	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)