



802.11n-HT20 Out-of-Band Emissions - Ant 0 / Ant 0 + 1

Channel 01 (2412MHz)


100kHz PSD reference Level

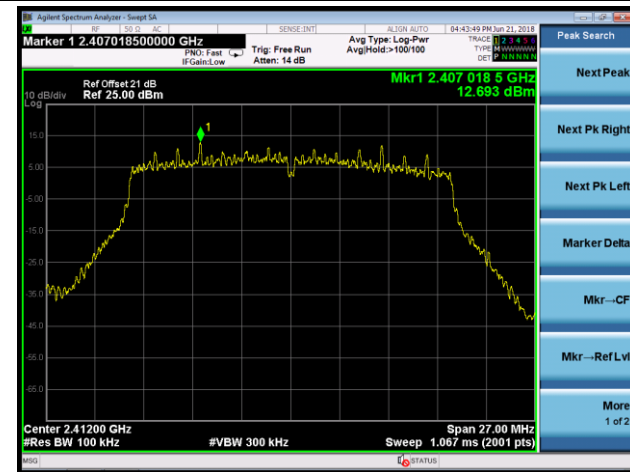

Low Band Edge

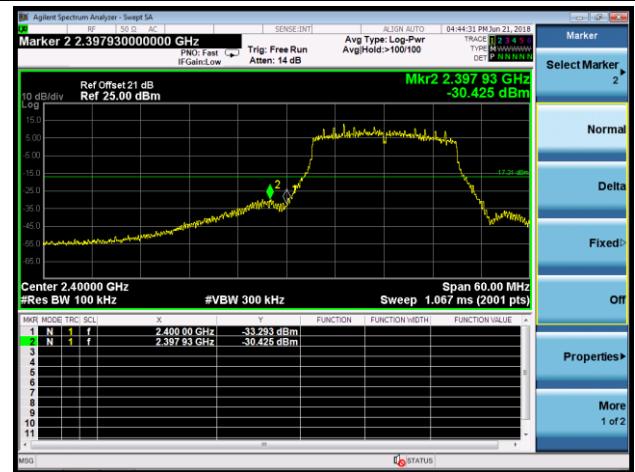


Spurious Emission

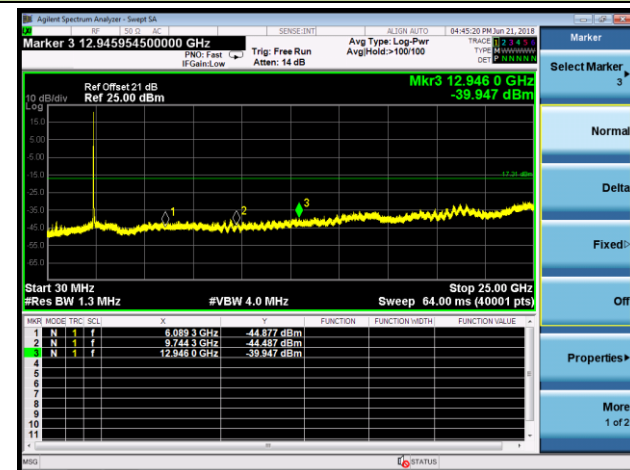


Note: The Value of the Display Line is -17.31dBm

Channel 06 (2437MHz)

100kHz PSD reference Level

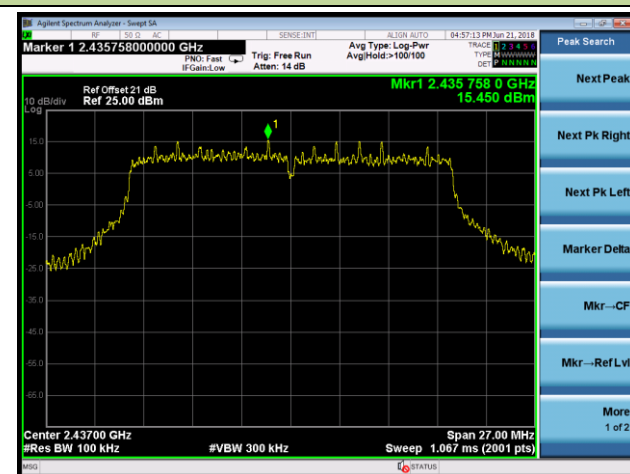

Spurious Emission

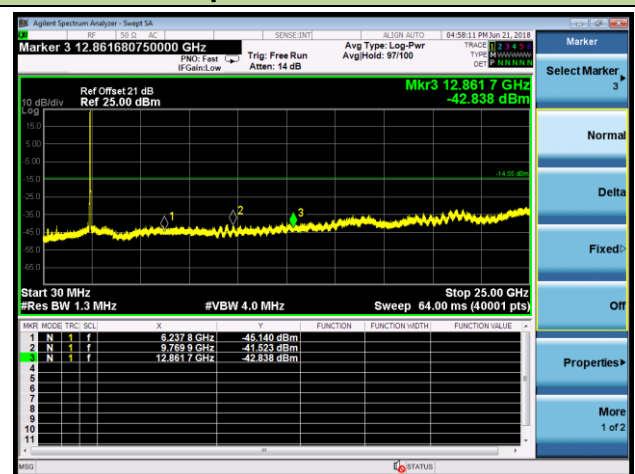


Note: The Value of the Display Line is -14.55dBm


802.11n-HT20 Out-of-Band Emissions - Ant 0 / Ant 0 + 1

Channel 11 (2462MHz)


100kHz PSD reference Level

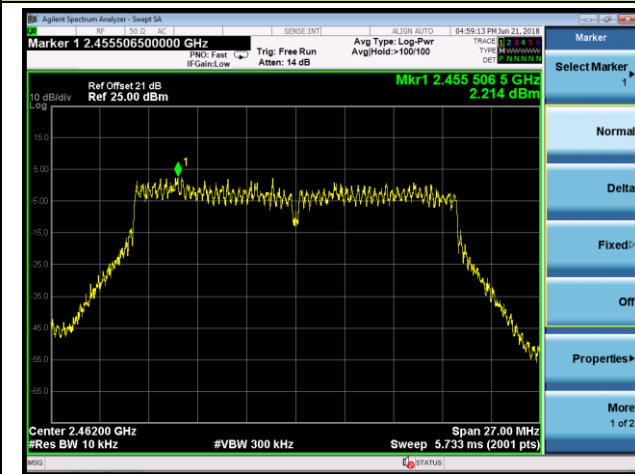

High Band Edge

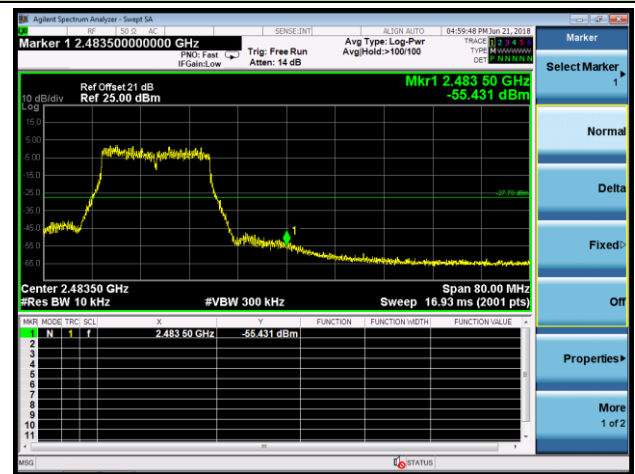

Spurious Emission

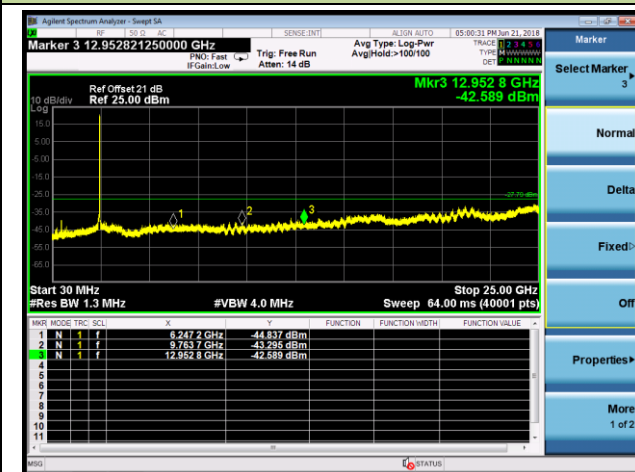


Note: The Value of the Display Line is -27.79dBm


802.11n-HT40 Out-of-Band Emissions - Ant 0 / Ant 0 + 1

Channel 03 (2422MHz)


100kHz PSD reference Level

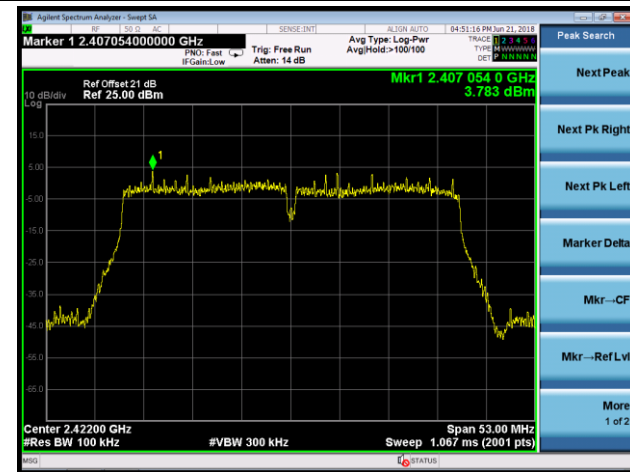

Low Band Edge

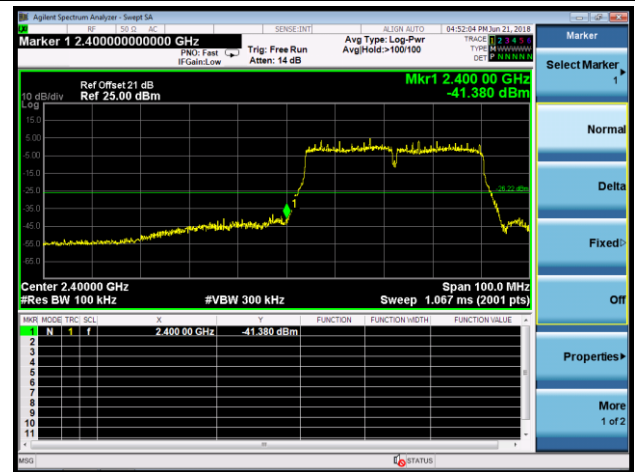


Spurious Emission

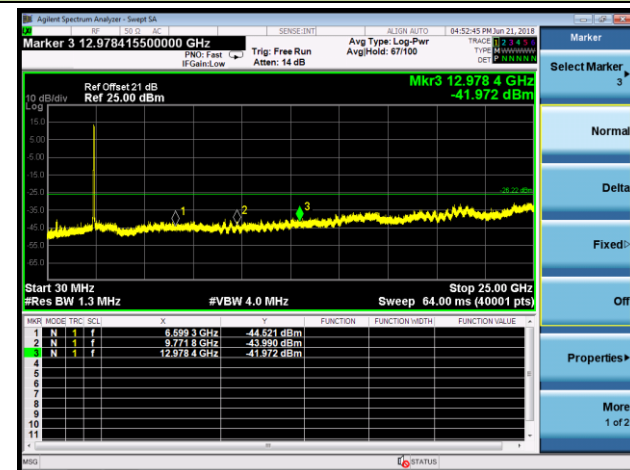


Note: The Value of the Display Line is -26.22dBm

Channel 06 (2437MHz)

100kHz PSD reference Level

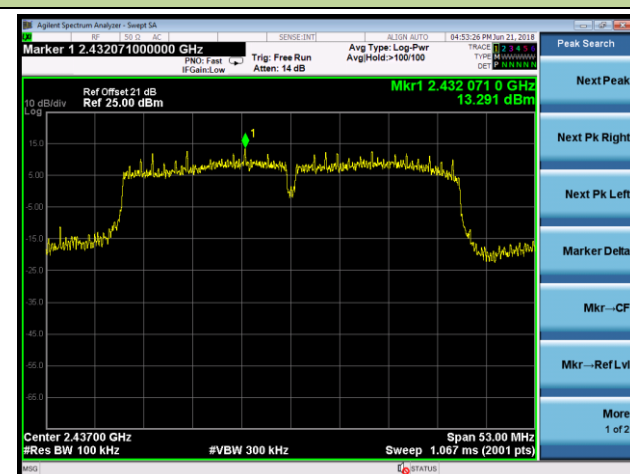

Spurious Emission

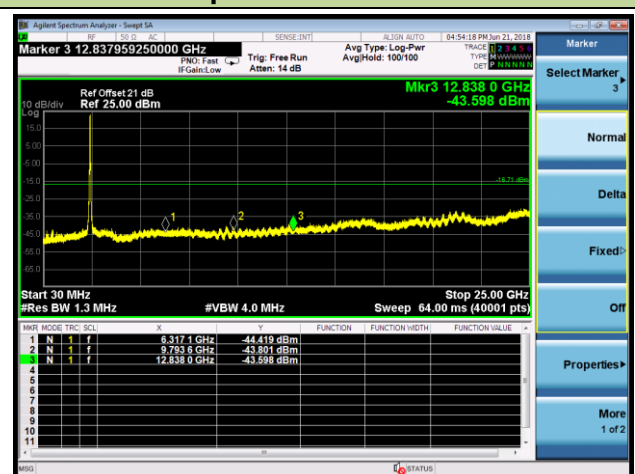

Note: The Value of the Display Line is -16.71dBm

802.11n-HT40 Out-of-Band Emissions - Ant 0 / Ant 0 + 1

Channel 09 (2452MHz)


100kHz PSD reference Level



High Band Edge



Spurious Emission

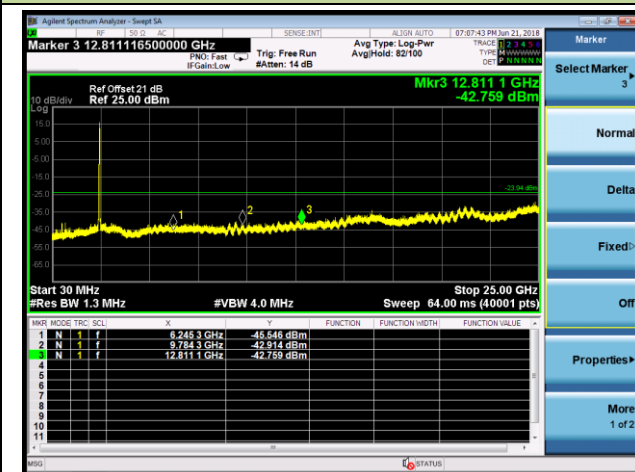

Note: The Value of the Display Line is -23.94dBm

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.6.4. Test Setup


9kHz ~ 30MHz Test Setup:

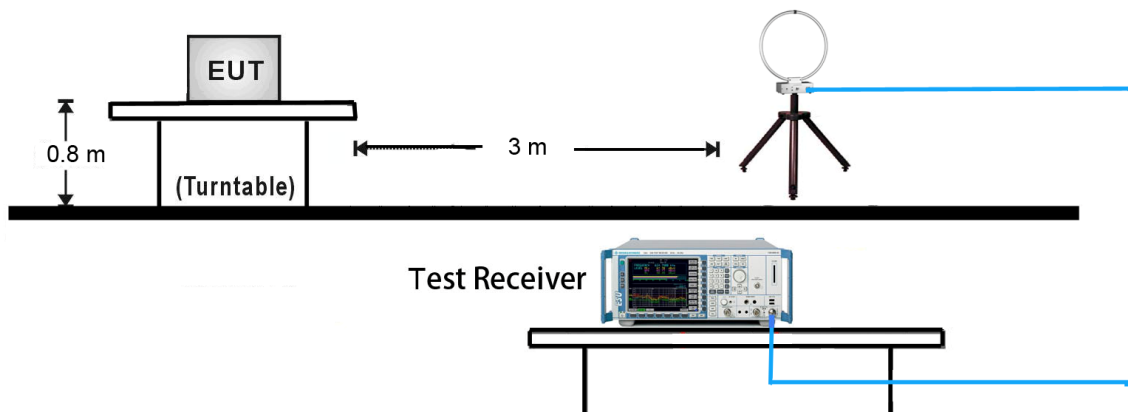


30MHz ~ 1GHz Test Setup:

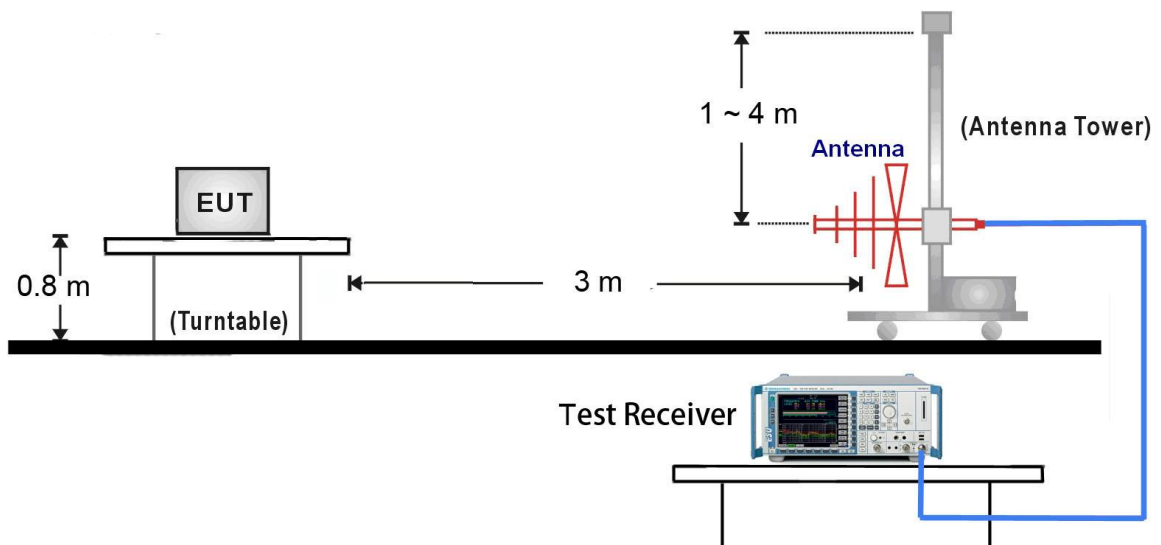

1GHz ~ 18GHz Test Setup:

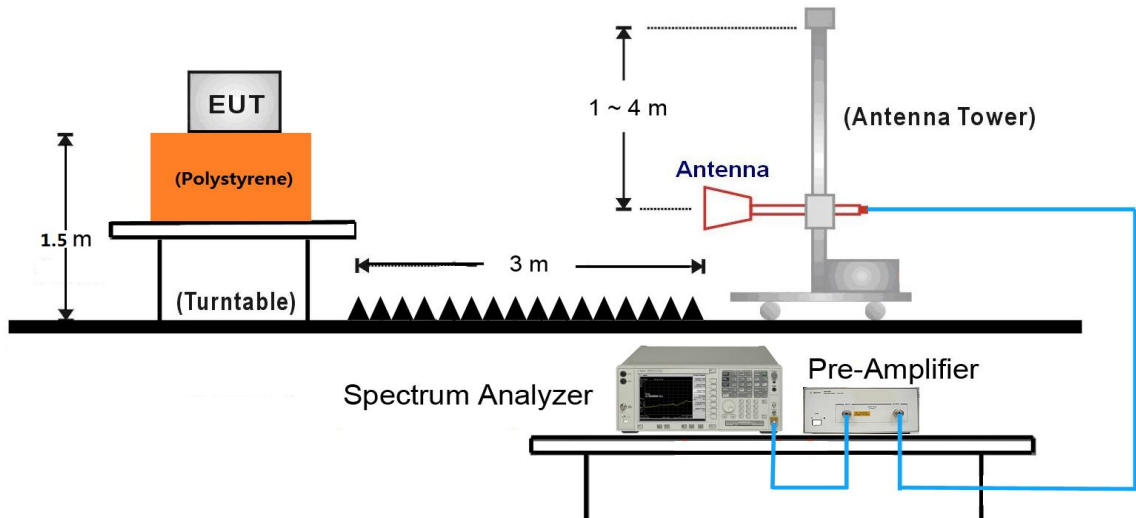

18GHz ~ 25GHz Test Setup:

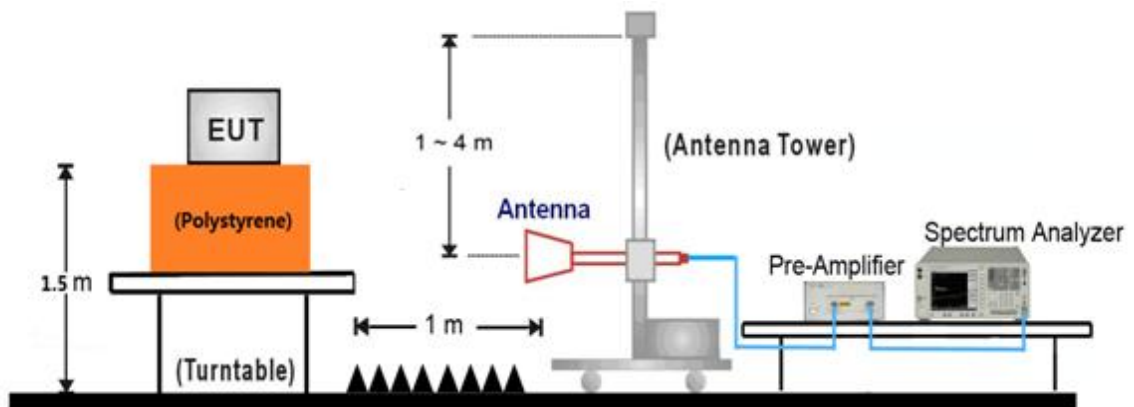

7.6.5. Test Result

Product	ACCESS POINT	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	58%
Test Site	AC1	Test Date	2018/06/20
Test Mode:	802.11b - Ant 0 + 1 (CDD Mode)	Test Channel:	01
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4825.0	45.5	3.7	49.2	74.0	-24.8	Peak	Horizontal
*	6567.5	37.3	8.6	45.9	89.2	-43.3	Peak	Horizontal
*	10078.0	34.3	15.6	49.9	89.2	-39.3	Peak	Horizontal
	11735.5	33.2	19.0	52.2	74.0	-21.8	Peak	Horizontal
	4825.0	40.1	3.7	43.8	74.0	-30.2	Peak	Vertical
*	6576.0	36.9	8.6	45.5	89.2	-43.7	Peak	Vertical
*	10222.5	35.0	16.3	51.3	89.2	-37.9	Peak	Vertical
	12135.0	34.4	18.9	53.3	74.0	-20.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (119.2dB μ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	58%
Test Site	AC1	Test Date	2018/06/20
Test Mode:	802.11b - Ant 0 + 1 (CDD Mode)	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4876.0	42.6	3.7	46.3	74.0	-27.7	Peak	Horizontal
*	6244.5	37.2	7.0	44.2	89.0	-44.8	Peak	Horizontal
*	9899.5	34.3	15.4	49.7	89.0	-39.3	Peak	Horizontal
	11684.5	31.9	19.2	51.1	74.0	-22.9	Peak	Horizontal
	4884.5	39.4	3.7	43.1	74.0	-30.9	Peak	Vertical
*	6856.5	39.1	9.5	48.6	89.0	-40.4	Peak	Vertical
*	8769.0	32.9	13.9	46.8	89.0	-42.2	Peak	Vertical
	11183.0	34.2	18.7	52.9	74.0	-21.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (119.0dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	58%
Test Site	AC1	Test Date	2018/06/20
Test Mode:	802.11b - Ant 0 + 1 (CDD Mode)	Test Channel:	11
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4927.0	40.4	3.7	44.1	74.0	-29.9	Peak	Horizontal
*	6304.0	36.7	7.2	43.9	89.8	-45.9	Peak	Horizontal
*	8760.5	32.9	13.9	46.8	89.8	-43.0	Peak	Horizontal
	11642.0	32.5	19.4	51.9	74.0	-22.1	Peak	Horizontal
	4833.5	39.2	3.7	42.9	74.0	-31.1	Peak	Vertical
*	6372.0	38.0	7.5	45.5	89.8	-44.3	Peak	Vertical
*	9814.5	35.2	15.4	50.6	89.8	-39.2	Peak	Vertical
	11684.5	32.9	19.2	52.1	74.0	-21.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (119.8dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	58%
Test Site	AC1	Test Date	2018/06/20
Test Mode:	802.11g - Ant 0 + 1 (CDD Mode)	Test Channel:	01
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4833.5	39.3	3.7	43.0	74.0	-31.0	Peak	Horizontal
*	6550.5	37.1	8.6	45.7	88.0	-42.3	Peak	Horizontal
*	8837.0	34.5	14.0	48.5	88.0	-39.5	Peak	Horizontal
	11684.5	32.9	19.2	52.1	74.0	-21.9	Peak	Horizontal
	4825.0	39.7	3.7	43.4	74.0	-30.6	Peak	Vertical
*	6329.5	37.9	7.3	45.2	88.0	-42.8	Peak	Vertical
*	8769.0	34.1	13.9	48.0	88.0	-40.0	Peak	Vertical
	11633.5	33.0	19.4	52.4	74.0	-21.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (118.0dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	58%
Test Site	AC1	Test Date	2018/06/20
Test Mode:	802.11g - Ant 0 + 1 (CDD Mode)	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4876.0	39.4	3.7	43.1	74.0	-30.9	Peak	Horizontal
*	6873.5	37.4	9.6	47.0	91.2	-44.2	Peak	Horizontal
*	8820.0	34.7	14.0	48.7	91.2	-42.5	Peak	Horizontal
	11659.0	33.3	19.3	52.6	74.0	-21.4	Peak	Horizontal
	4910.0	39.2	3.7	42.9	74.0	-31.1	Peak	Vertical
*	6610.0	37.9	8.7	46.6	91.2	-44.6	Peak	Vertical
*	8854.0	34.9	14.0	48.9	91.2	-42.3	Peak	Vertical
	11319.0	33.4	18.9	52.3	74.0	-21.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (121.2dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	58%
Test Site	AC1	Test Date	2018/06/20
Test Mode:	802.11g - Ant 0 + 1 (CDD Mode)	Test Channel:	11
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4816.5	39.7	3.7	43.4	74.0	-30.6	Peak	Horizontal
*	6550.5	37.5	8.6	46.1	88.6	-42.5	Peak	Horizontal
*	8820.0	34.8	14.0	48.8	88.6	-39.8	Peak	Horizontal
	11506.0	32.8	19.4	52.2	74.0	-21.8	Peak	Horizontal
	4876.0	39.3	3.7	43.0	74.0	-31.0	Peak	Vertical
*	6576.0	37.4	8.6	46.0	88.6	-42.6	Peak	Vertical
*	8820.0	34.5	14.0	48.5	88.6	-40.1	Peak	Vertical
	11531.5	33.3	19.4	52.7	74.0	-21.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (118.6dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	58%
Test Site	AC1	Test Date	2018/06/20
Test Mode:	802.11n-HT20 - Ant 0 + 1 (CDD Mode)	Test Channel:	01
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4825.0	39.4	3.7	43.1	74.0	-30.9	Peak	Horizontal
*	6363.5	37.9	7.5	45.4	88.4	-43.0	Peak	Horizontal
*	8794.5	34.1	13.9	48.0	88.4	-40.4	Peak	Horizontal
	11956.5	34.3	18.6	52.9	74.0	-21.1	Peak	Horizontal
	4884.5	39.0	3.7	42.7	74.0	-31.3	Peak	Vertical
*	7069.0	36.9	11.2	48.1	88.4	-40.3	Peak	Vertical
*	8726.5	34.2	13.8	48.0	88.4	-40.4	Peak	Vertical
	11540.0	33.1	19.4	52.5	74.0	-21.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (118.4dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	58%
Test Site	AC1	Test Date	2018/06/20
Test Mode:	802.11n-HT20 - Ant 0 + 1 (CDD Mode)	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4876.0	40.9	3.7	44.6	74.0	-29.4	Peak	Horizontal
*	6890.5	37.4	9.7	47.1	91.3	-44.2	Peak	Horizontal
*	10010.0	35.7	15.4	51.1	91.3	-40.2	Peak	Horizontal
	11361.5	33.0	19.0	52.0	74.0	-22.0	Peak	Horizontal
	4816.5	38.5	3.7	42.2	74.0	-31.8	Peak	Vertical
*	6304.0	37.4	7.2	44.6	91.3	-46.7	Peak	Vertical
*	8837.0	35.6	14.0	49.6	91.3	-41.7	Peak	Vertical
	12084.0	33.6	18.9	52.5	74.0	-21.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (121.3dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	58%
Test Site	AC1	Test Date	2018/06/20
Test Mode:	802.11n-HT20 - Ant 0 + 1 (CDD Mode)	Test Channel:	11
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4799.5	40.1	3.7	43.8	74.0	-30.2	Peak	Horizontal
*	6924.5	36.2	10.0	46.2	88.0	-41.8	Peak	Horizontal
*	9729.5	36.9	14.7	51.6	88.0	-36.4	Peak	Horizontal
	12177.5	33.8	18.8	52.6	74.0	-21.4	Peak	Horizontal
	4833.5	39.5	3.7	43.2	74.0	-30.8	Peak	Vertical
*	6933.0	36.6	10.1	46.7	88.0	-41.3	Peak	Vertical
*	9797.5	35.8	15.1	50.9	88.0	-37.1	Peak	Vertical
	12534.5	34.5	18.6	53.1	74.0	-20.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (118.0dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	58%
Test Site	AC1	Test Date	2018/06/20
Test Mode:	802.11n-HT40 - Ant 0 + 1 (CDD Mode)	Test Channel:	03
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4833.5	39.2	3.7	42.9	74.0	-31.1	Peak	Horizontal
*	6550.5	37.6	8.6	46.2	80.6	-34.4	Peak	Horizontal
*	10044.0	34.0	15.5	49.5	80.6	-31.1	Peak	Horizontal
	12449.5	33.6	18.4	52.0	74.0	-22.0	Peak	Horizontal
	4757.0	39.4	3.7	43.1	74.0	-30.9	Peak	Vertical
*	6482.5	37.5	8.3	45.8	80.6	-34.8	Peak	Vertical
*	10078.0	34.2	15.6	49.8	80.6	-30.8	Peak	Vertical
	12441.0	33.8	18.4	52.2	74.0	-21.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (110.6dB μ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	58%
Test Site	AC1	Test Date	2018/06/20
Test Mode:	802.11n-HT40 - Ant 0 + 1 (CDD Mode)	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4765.5	38.1	3.7	41.8	74.0	-32.2	Peak	Horizontal
*	6831.0	37.1	9.3	46.4	84.4	-38.0	Peak	Horizontal
*	10146.0	35.2	16.0	51.2	84.4	-33.2	Peak	Horizontal
	12526.0	33.5	18.6	52.1	74.0	-21.9	Peak	Horizontal
	4833.5	39.2	3.7	42.9	74.0	-31.1	Peak	Vertical
*	6848.0	37.4	9.4	46.8	84.4	-37.6	Peak	Vertical
*	9967.5	35.2	15.3	50.5	84.4	-33.9	Peak	Vertical
	12211.5	33.3	18.8	52.1	74.0	-21.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (114.4dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	58%
Test Site	AC1	Test Date	2018/06/20
Test Mode:	802.11n-HT40 - Ant 0 + 1 (CDD Mode)	Test Channel:	09
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4816.5	39.1	3.7	42.8	74.0	-31.2	Peak	Horizontal
*	6550.5	37.6	8.6	46.2	81.1	-34.9	Peak	Horizontal
*	9959.0	35.2	15.3	50.5	81.1	-30.6	Peak	Horizontal
	12475.0	32.7	18.5	51.2	74.0	-22.8	Peak	Horizontal
	4731.5	37.4	3.6	41.0	74.0	-33.0	Peak	Vertical
*	6644.0	36.3	8.7	45.0	81.1	-36.1	Peak	Vertical
*	8777.5	34.2	13.9	48.1	81.1	-33.0	Peak	Vertical
	12118.0	32.8	18.9	51.7	74.0	-22.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 30dBc of the fundamental emission level (111.1dBμV/m) or 15.209 which is higher.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Worst Case of Radiated Emission below 1GHz:

Site: AC1	Time: 2018/06/22 - 16:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: VULB9162_0.03-8GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz

Note: There is the worst case within frequency range 30MHz~1GHz.

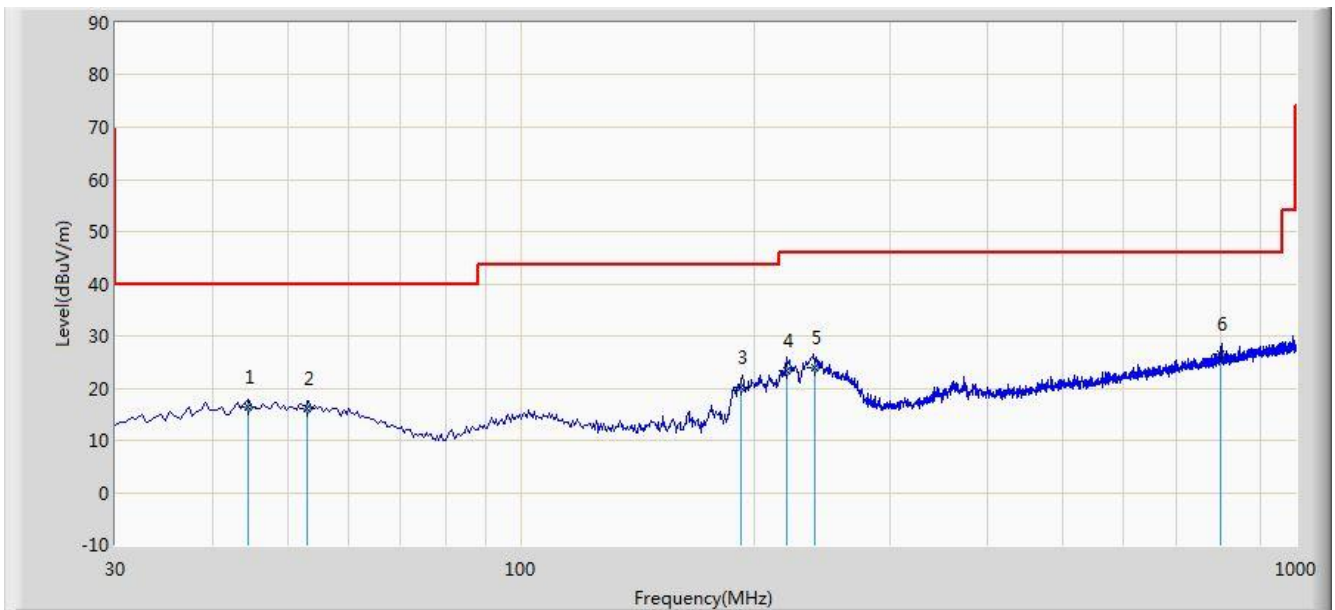

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			44.460	16.327	1.500	-23.673	40.000	14.828	QP
2			53.150	16.151	1.150	-23.849	40.000	15.001	QP
3			192.150	20.256	8.100	-23.244	43.500	12.156	QP
4			220.160	23.363	10.450	-22.637	46.000	12.913	QP
5			239.150	24.044	10.400	-21.956	46.000	13.644	QP
6			801.430	26.441	3.160	-19.559	46.000	23.281	QP


Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

Site: AC1	Time: 2018/06/22 - 16:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: VULB9162_0.03-8GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz

Note: There is the worst case within frequency range 30MHz~1GHz.

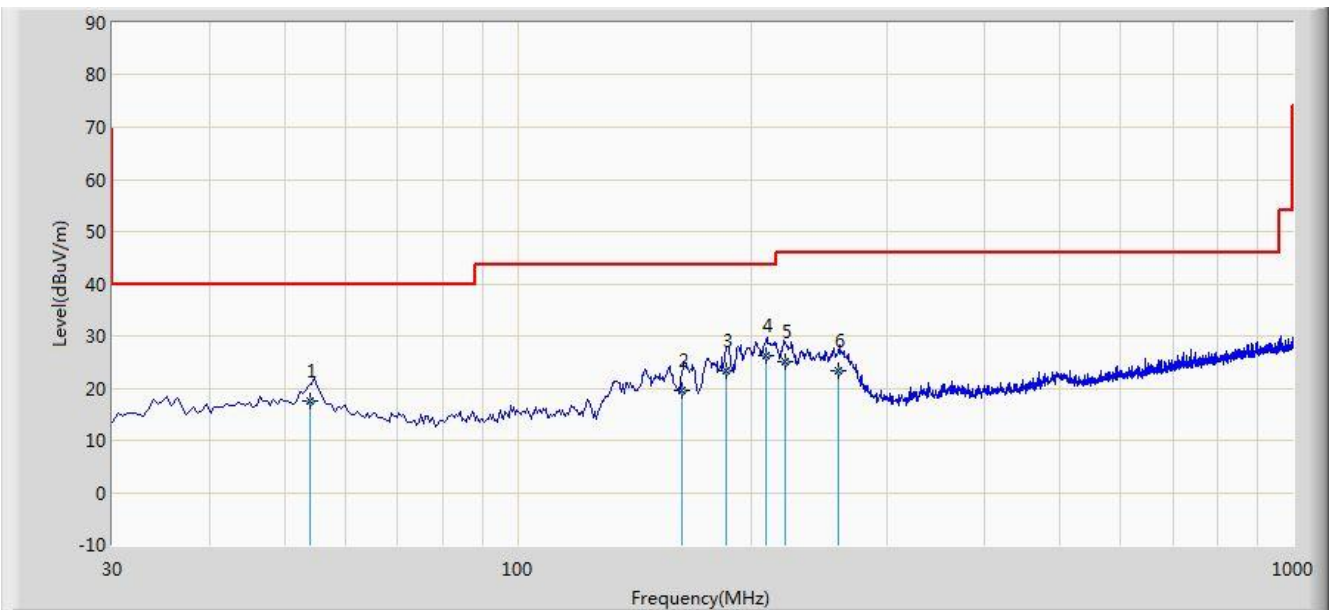

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			54.050	17.565	2.600	-22.435	40.000	14.965	QP
2			163.100	19.644	9.465	-23.856	43.500	10.179	QP
3			186.100	23.240	11.546	-20.260	43.500	11.694	QP
4			209.150	26.131	13.460	-17.369	43.500	12.671	QP
5			221.400	25.107	12.160	-20.893	46.000	12.947	QP
6			259.400	23.193	9.050	-22.807	46.000	14.143	QP


Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

The Worst Case of Radiated Emission above 1GHz:

Site: AC1	Time: 2018/06/20 - 09:54
Limit: FCC_Part15.209_RSE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2437MHz	

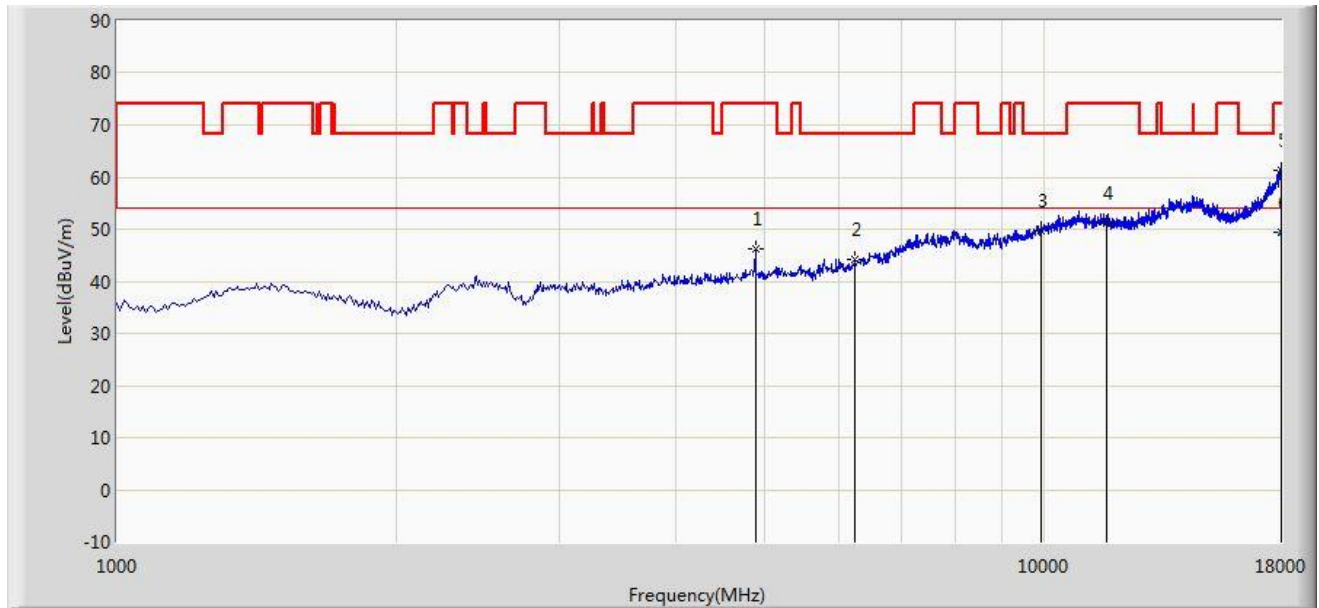


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			4876.000	46.270	42.610	-27.730	74.000	3.660	PK
2			6244.500	44.220	37.247	-23.980	68.200	6.972	PK
3			9899.500	49.656	34.290	-18.544	68.200	15.366	PK
4			11684.500	51.057	31.866	-22.943	74.000	19.190	PK
5			18000.000	61.335	29.248	-12.665	74.000	32.087	PK
6		*	18000.000	49.517	17.430	-4.483	54.000	32.087	AV

Note1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note2: The test trace (Frequency range 13GHz ~ 18GHz above average limit) is same as the ambient noise, we selected the highest peak level frequency and performed average emission testing again.

Site: AC1	Time: 2018/06/20 - 09:56
Limit: FCC_Part15.209_RSE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2437MHz	

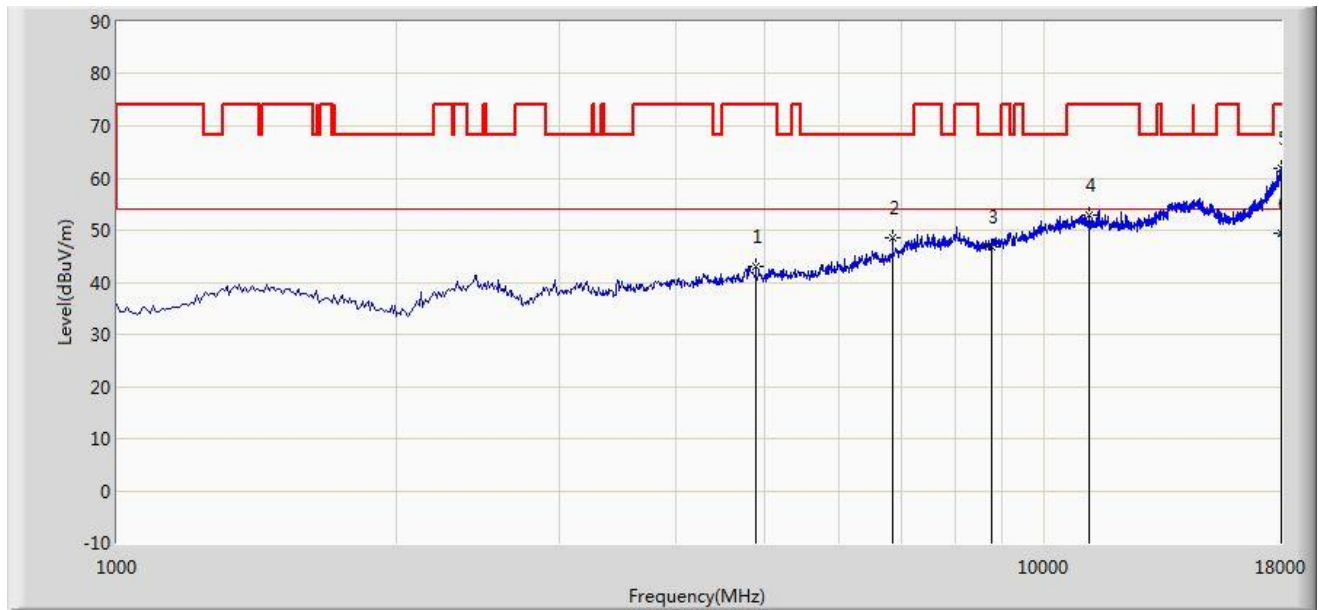


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			4884.500	43.064	39.407	-30.936	74.000	3.657	PK
2			6856.500	48.570	39.117	-19.630	68.200	9.454	PK
3			8769.000	46.817	32.893	-21.383	68.200	13.924	PK
4			11183.000	52.964	34.245	-21.036	74.000	18.719	PK
5			18000.000	61.799	29.712	-12.201	74.000	32.087	PK
6		*	18000.000	49.427	17.340	-4.573	54.000	32.087	AV

Note1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note2: The test trace (Frequency range 13GHz ~ 18GHz above average limit) is same as the ambient noise, we selected the highest peak level frequency and performed average emission testing again.

Site: AC1	Time: 2018/06/20 - 10:59
Limit: FCC_Part15.209_RSE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2437MHz	

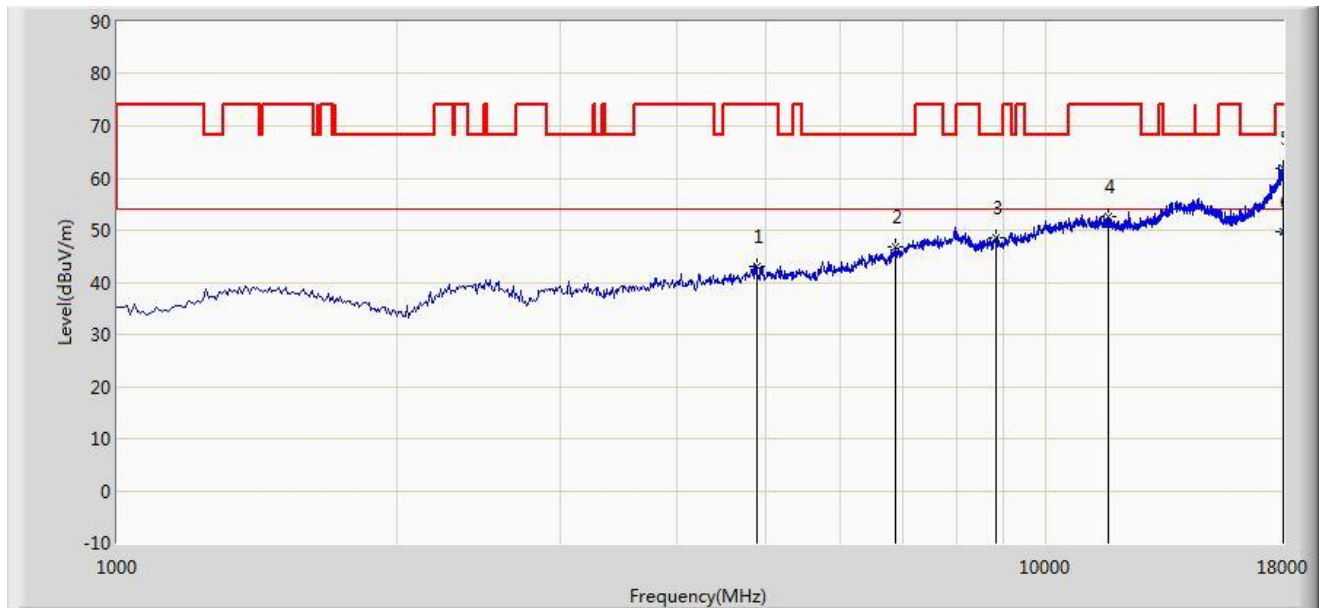


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			4876.000	43.103	39.443	-30.897	74.000	3.660	PK
2			6873.500	46.945	37.353	-21.255	68.200	9.591	PK
3			8820.000	48.668	34.681	-19.532	68.200	13.987	PK
4			11659.000	52.610	33.315	-21.390	74.000	19.294	PK
5			18000.000	61.784	29.697	-12.216	74.000	32.087	PK
6		*	18000.000	49.667	17.580	-4.333	54.000	32.087	AV

Note1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note2: The test trace (Frequency range 13GHz ~ 18GHz above average limit) is same as the ambient noise, we selected the highest peak level frequency and performed average emission testing again.

Site: AC1	Time: 2018/06/20 - 11:00
Limit: FCC_Part15.209_RSE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2437MHz	

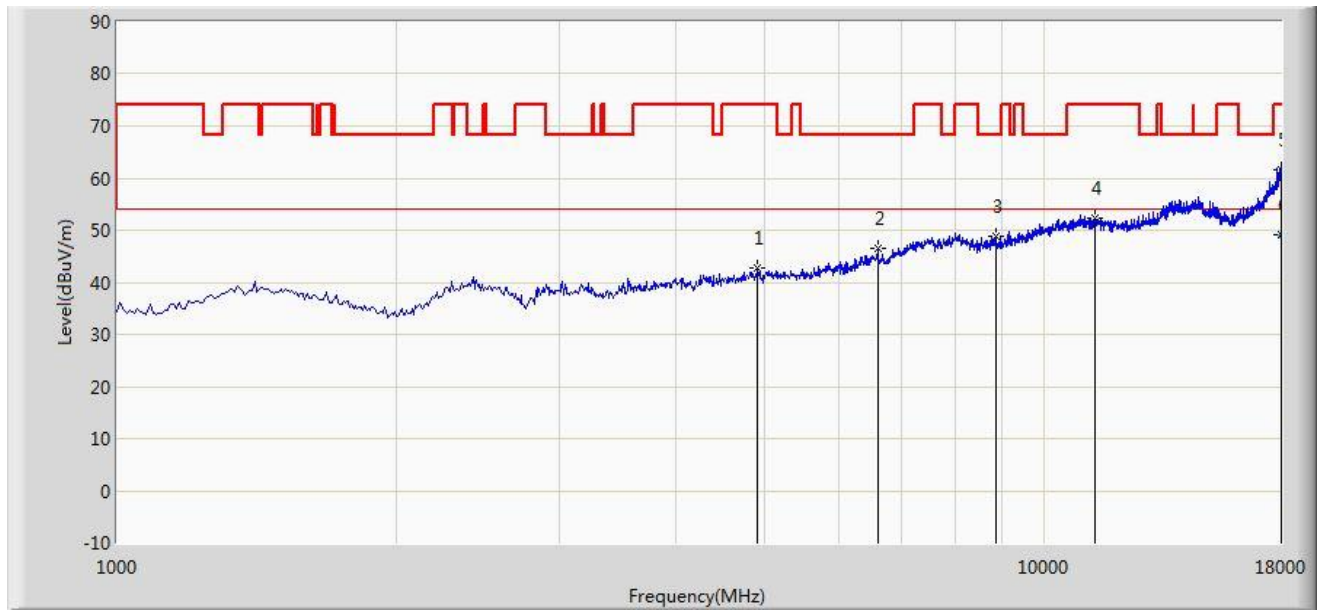


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			4910.000	42.831	39.180	-31.169	74.000	3.652	PK
2			6610.000	46.580	37.904	-21.620	68.200	8.676	PK
3			8854.000	48.895	34.856	-19.305	68.200	14.039	PK
4			11319.000	52.329	33.413	-21.671	74.000	18.916	PK
5			18000.000	61.713	29.626	-12.287	74.000	32.087	PK
6		*	18000.000	49.127	17.040	-4.873	54.000	32.087	AV

Note1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note2: The test trace (Frequency range 13GHz ~ 18GHz above average limit) is same as the ambient noise, we selected the highest peak level frequency and performed average emission testing again.

Site: AC1	Time: 2018/06/20 - 11:04
Limit: FCC_Part15.209_RSE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz	

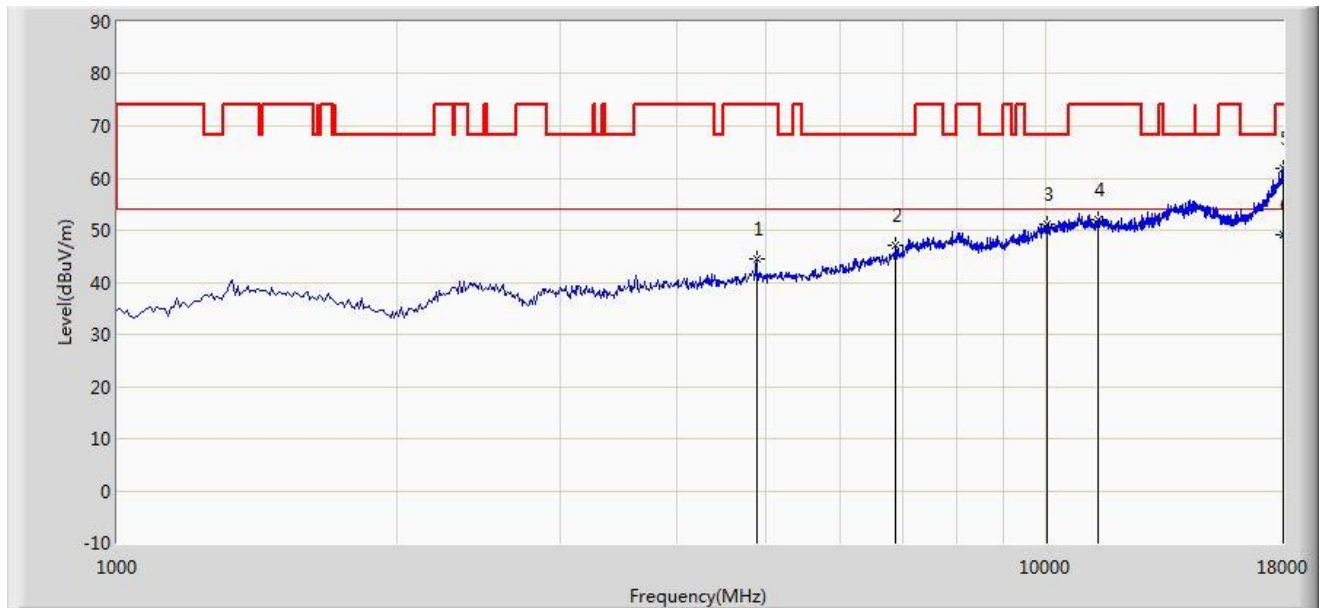


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			4876.000	44.524	40.864	-29.476	74.000	3.660	PK
2			6890.500	47.169	37.438	-21.031	68.200	9.731	PK
3			10010.000	51.081	35.682	-17.119	68.200	15.398	PK
4			11361.500	52.058	33.045	-21.942	74.000	19.013	PK
5			18000.000	61.788	29.701	-12.212	74.000	32.087	PK
6		*	18000.000	49.127	17.040	-4.873	54.000	32.087	AV

Note1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note2: The test trace (Frequency range 13GHz ~ 18GHz above average limit) is same as the ambient noise, we selected the highest peak level frequency and performed average emission testing again.

Site: AC1	Time: 2018/06/20 - 11:10
Limit: FCC_Part15.209_RSE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz	

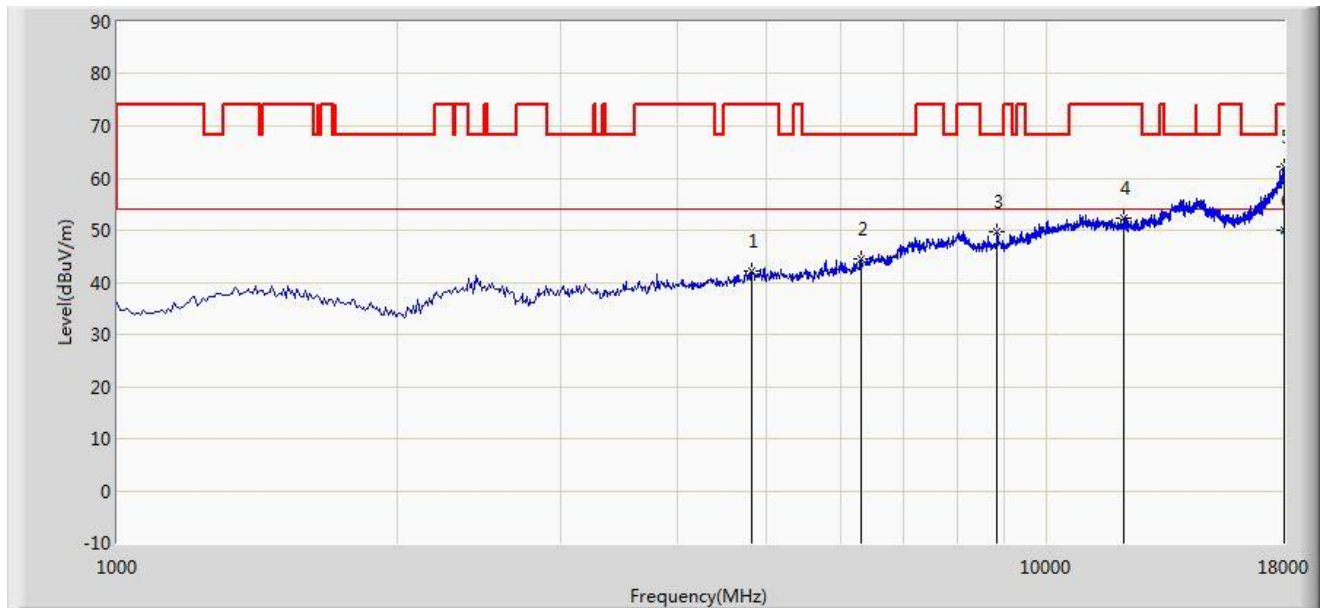


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			4816.500	42.190	38.513	-31.810	74.000	3.677	PK
2			6304.000	44.626	37.423	-23.574	68.200	7.202	PK
3			8837.000	49.624	35.606	-18.576	68.200	14.019	PK
4			12084.000	52.417	33.560	-21.583	74.000	18.857	PK
5			18000.000	62.164	30.077	-11.836	74.000	32.087	PK
6		*	18000.000	49.977	17.890	-4.023	54.000	32.087	AV

Note1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note2: The test trace (Frequency range 13GHz ~ 18GHz above average limit) is same as the ambient noise, we selected the highest peak level frequency and performed average emission testing again.

Site: AC1	Time: 2018/06/20 - 11:13
Limit: FCC_Part15.209_RSE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz	

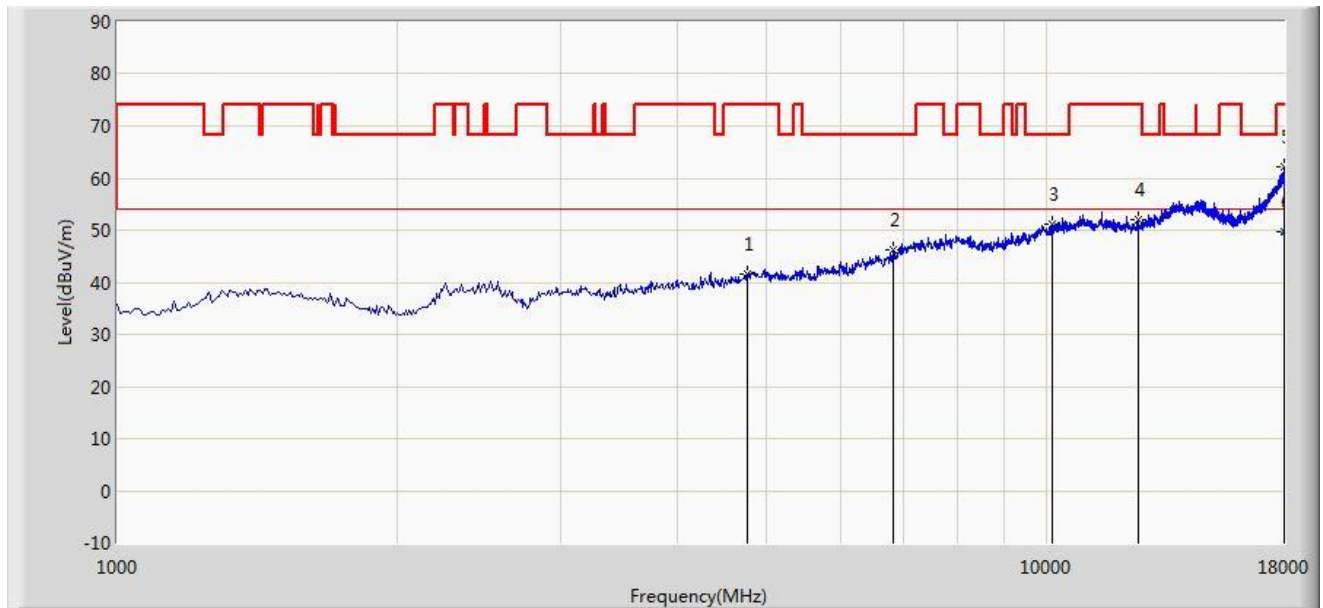


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			4765.500	41.736	38.070	-32.264	74.000	3.666	PK
2			6831.000	46.338	37.073	-21.862	68.200	9.265	PK
3			10146.000	51.176	35.214	-17.024	68.200	15.962	PK
4			12526.000	52.031	33.465	-21.969	74.000	18.566	PK
5			18000.000	62.233	30.146	-11.767	74.000	32.087	PK
6		*	18000.000	49.617	17.530	-4.383	54.000	32.087	AV

Note1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note2: The test trace (Frequency range 13GHz ~ 18GHz above average limit) is same as the ambient noise, we selected the highest peak level frequency and performed average emission testing again.

Site: AC1	Time: 2018/06/20 - 11:14
Limit: FCC_Part15.209_RSE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz	

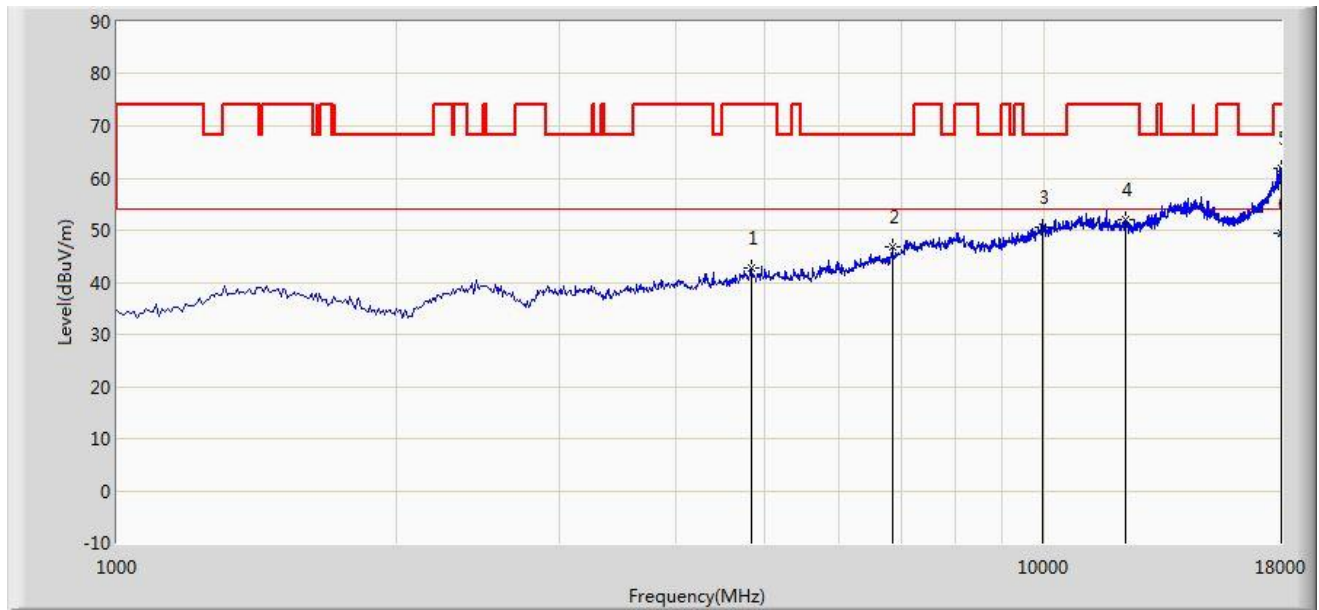

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			4833.500	42.832	39.160	-31.168	74.000	3.673	PK
2			6848.000	46.756	37.371	-21.444	68.200	9.386	PK
3			9967.500	50.509	35.167	-17.691	68.200	15.342	PK
4			12211.500	52.005	33.254	-21.995	74.000	18.752	PK
5			18000.000	61.813	29.726	-12.187	74.000	32.087	PK
6		*	18000.000	49.407	17.320	-4.593	54.000	32.087	AV

Note1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note2: The test trace (Frequency range 13GHz ~ 18GHz above average limit) is same as the ambient noise, we selected the highest peak level frequency and performed average emission testing again.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42-16.423	399.9 - 410	4.5-5.15
¹ 0.495 - 0.505	16.69475-16.69525	608 - 614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960 - 1240	7.25-7.75
4.125-4.128	25.5 -25.67	1300 - 1427	8.25 - 8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660 - 1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123 - 138	2200 - 2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.525	2483.5 - 2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690 - 2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260 - 3267	23.6-24.0
12.29-12.293	167.72-173.2	3332 - 3339	31.2-31.8
12.51975-12.52025	240 - 285	3345.8 - 3358	36.43-36.5
12.57675-12.57725	322-335.4	3600 - 4400	(²)
13.36-13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.7.3. Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 1/T. T is the minimum transmission duration.
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Sweep time = peak
5. Sweep time = auto
6. Trace mode = max hold
7. Allow max hold to run for at least 50 times (1/duty cycle) traces


7.7.4.Test Setup

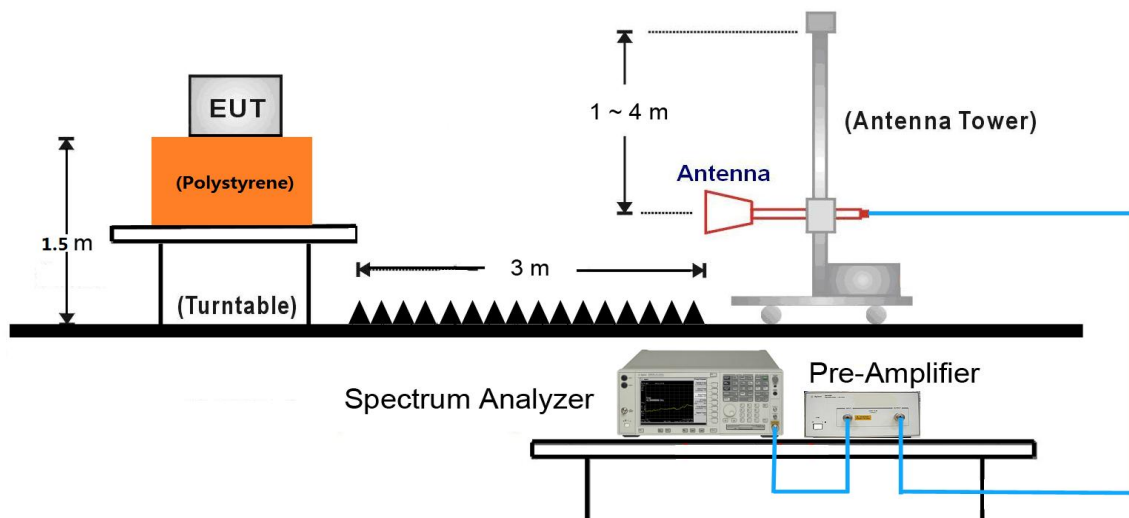

Test Mode	T = Transmission Duration (ms)	VBW (1/T) (Hz)
802.11b	12.390	81
802.11g	2.064	484
802.11n-HT20	4.980	201
802.11n-HT40	2.420	413

7.7.5. Test Result

Site: AC1	Time: 2018/06/20 - 21:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2412MHz	

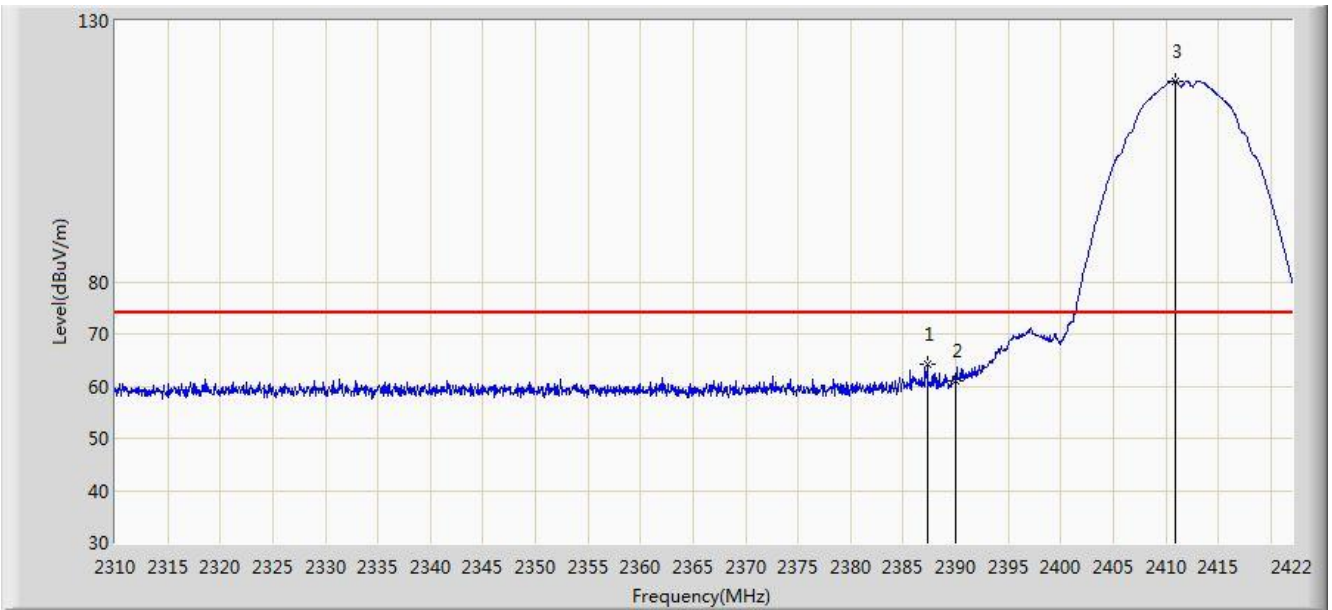


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.280	64.104	31.546	-9.896	74.000	32.558	PK
2			2390.000	61.125	28.571	-12.875	74.000	32.554	PK
3		*	2410.856	118.475	85.948	N/A	N/A	32.527	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 21:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2412MHz	

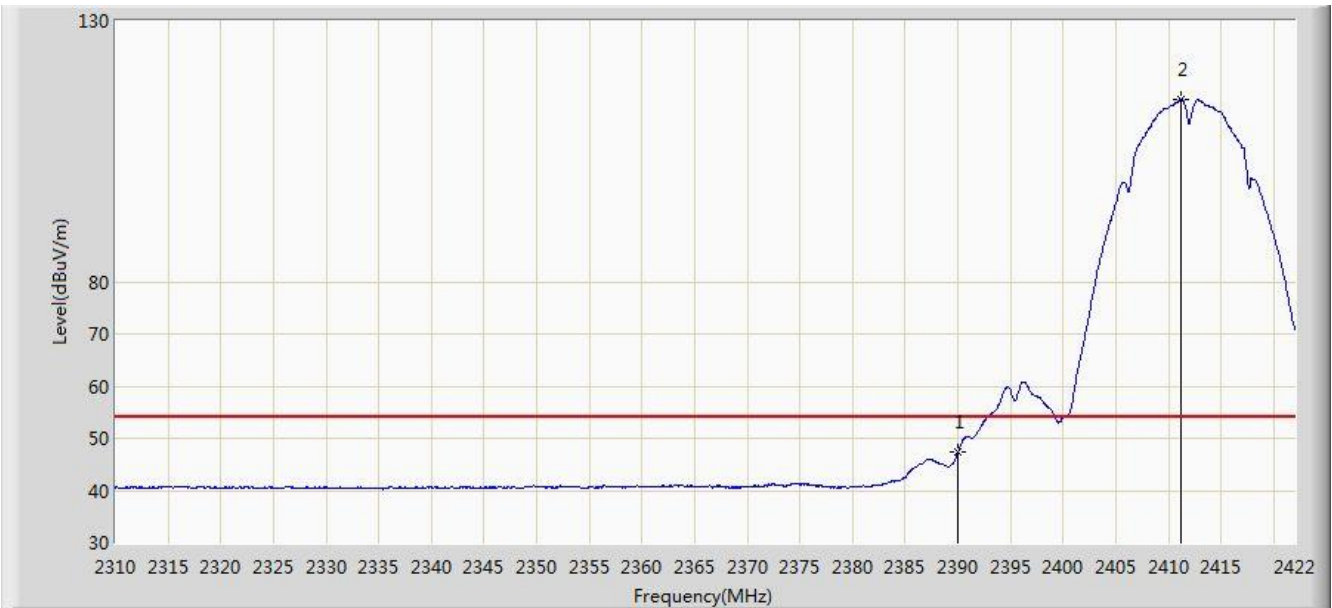


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.293	14.739	-6.707	54.000	32.554	AV
2		*	2411.248	115.000	82.473	N/A	N/A	32.526	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 21:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2412MHz	

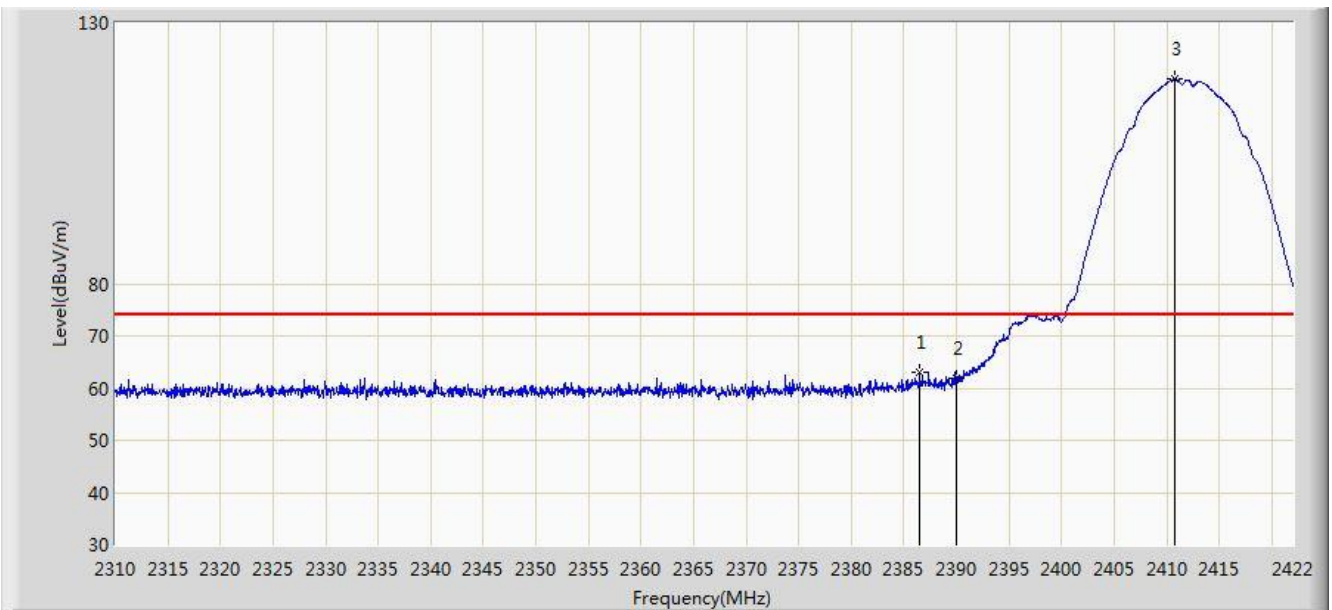


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.496	63.068	30.509	-10.932	74.000	32.559	PK
2			2390.000	61.788	29.234	-12.212	74.000	32.554	PK
3		*	2410.800	119.227	86.700	N/A	N/A	32.527	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 21:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2412MHz	

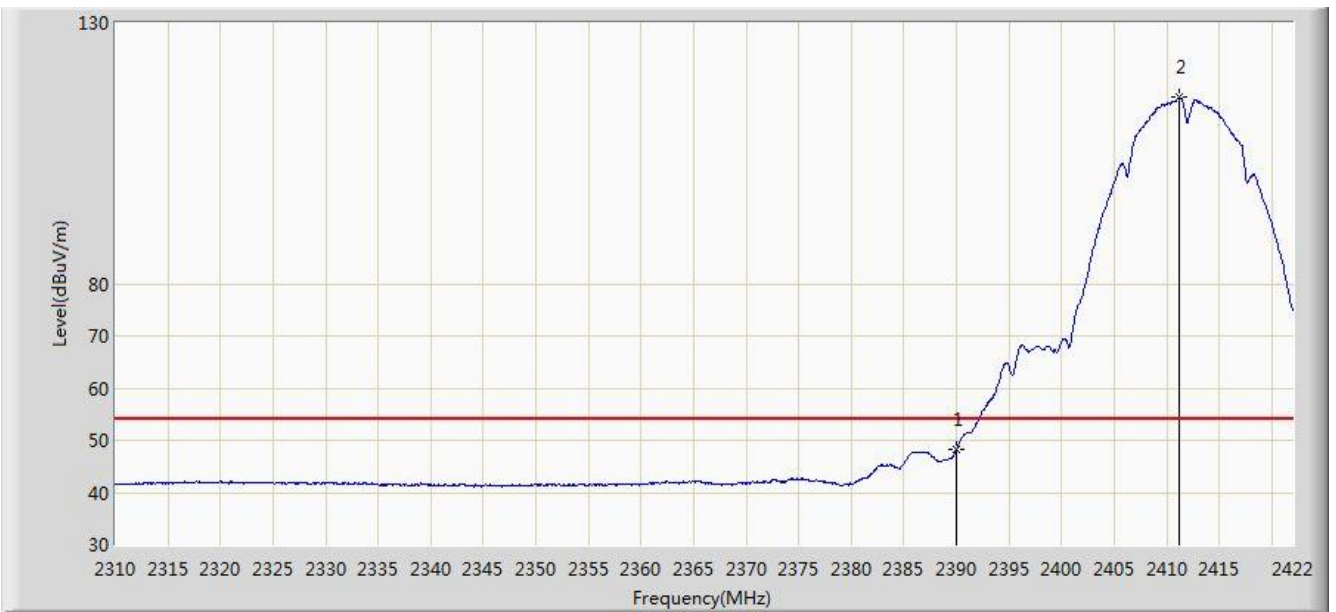


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	48.184	15.630	-5.816	54.000	32.554	AV
2		*	2411.248	115.719	83.192	N/A	N/A	32.526	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 21:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2437MHz	

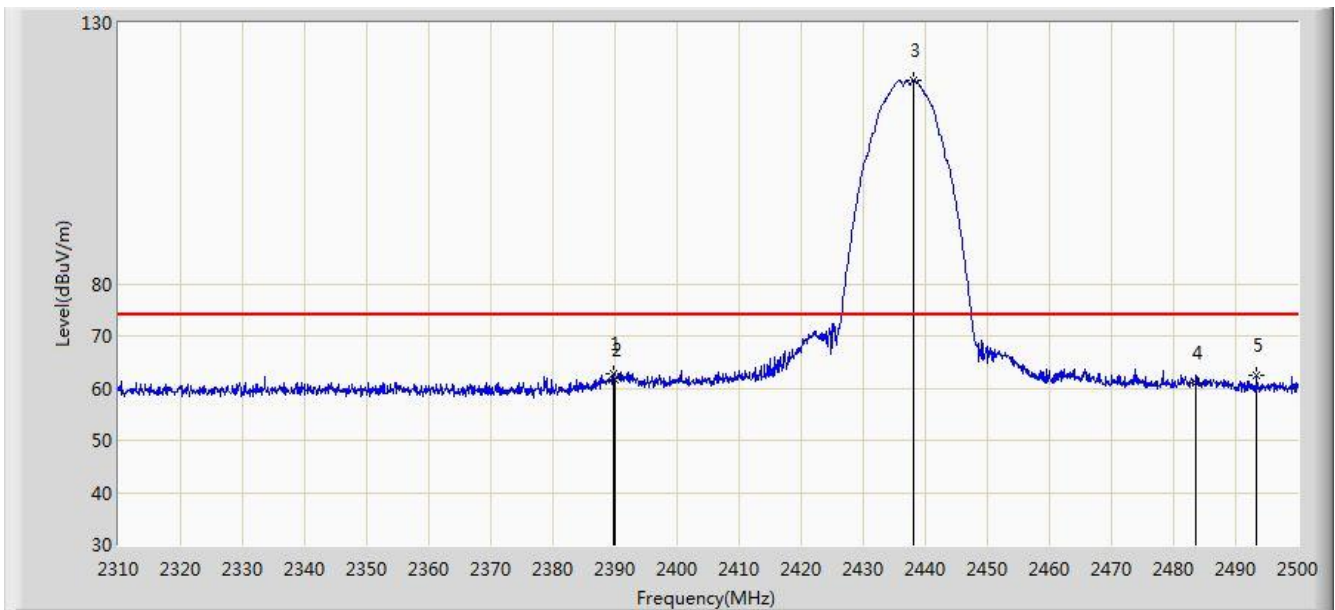


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.800	62.685	30.130	-11.315	74.000	32.555	PK
2			2390.000	61.592	29.038	-12.408	74.000	32.554	PK
3		*	2438.155	119.031	86.537	N/A	N/A	32.495	PK
4			2483.500	61.119	28.538	-12.881	74.000	32.580	PK
5			2493.445	62.447	29.837	-11.553	74.000	32.610	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 21:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2437MHz	

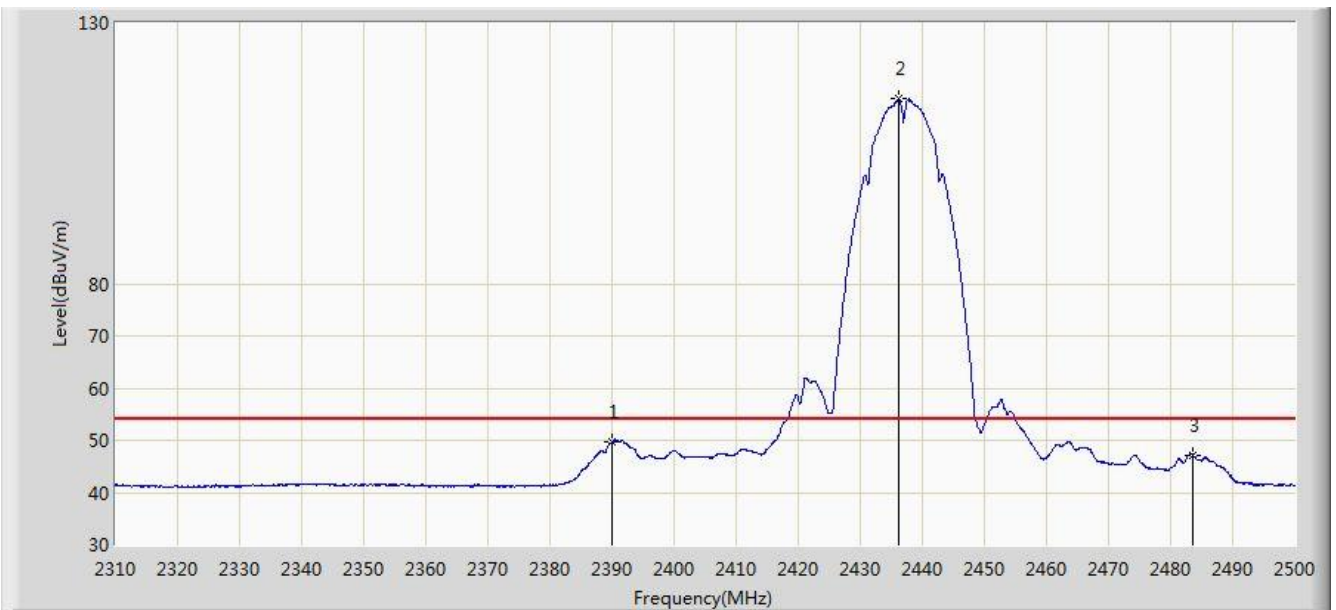


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.590	17.036	-4.410	54.000	32.554	AV
2		*	2436.160	115.451	82.954	N/A	N/A	32.497	AV
3			2483.500	47.231	14.650	-6.769	54.000	32.580	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 21:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2437MHz	

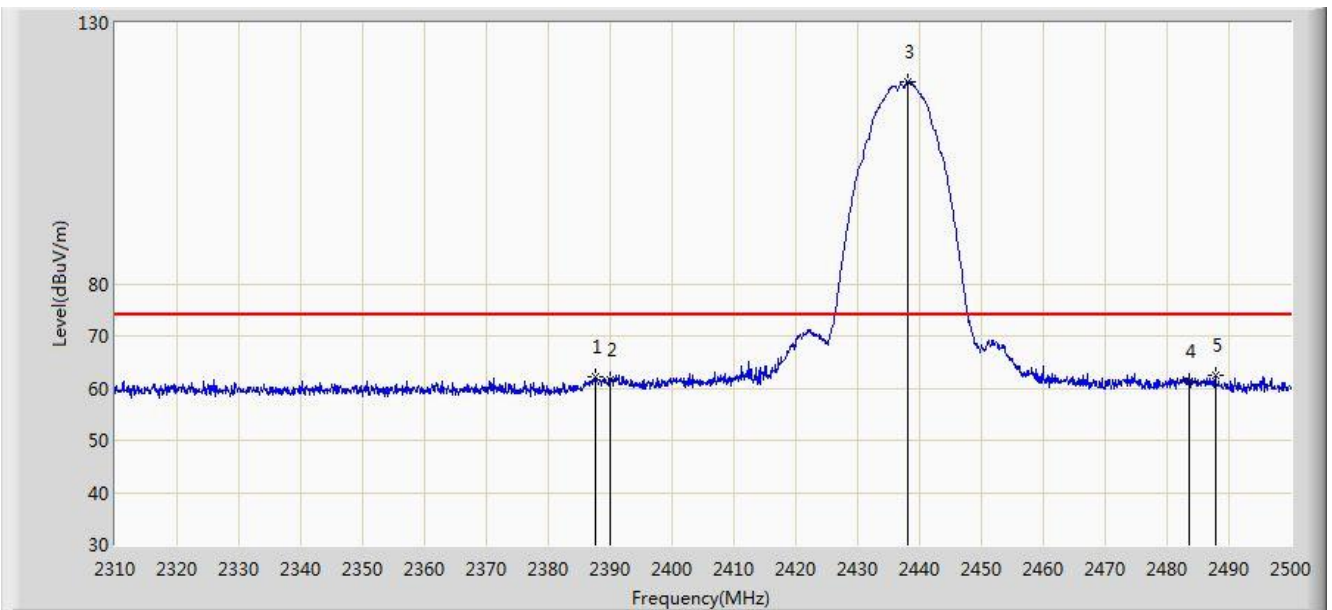


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.615	62.133	29.575	-11.867	74.000	32.558	PK
2			2390.000	61.553	28.999	-12.447	74.000	32.554	PK
3		*	2438.155	118.673	86.179	N/A	N/A	32.495	PK
4			2483.500	61.415	28.834	-12.585	74.000	32.580	PK
5			2487.745	62.401	29.808	-11.599	74.000	32.593	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 21:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2437MHz	

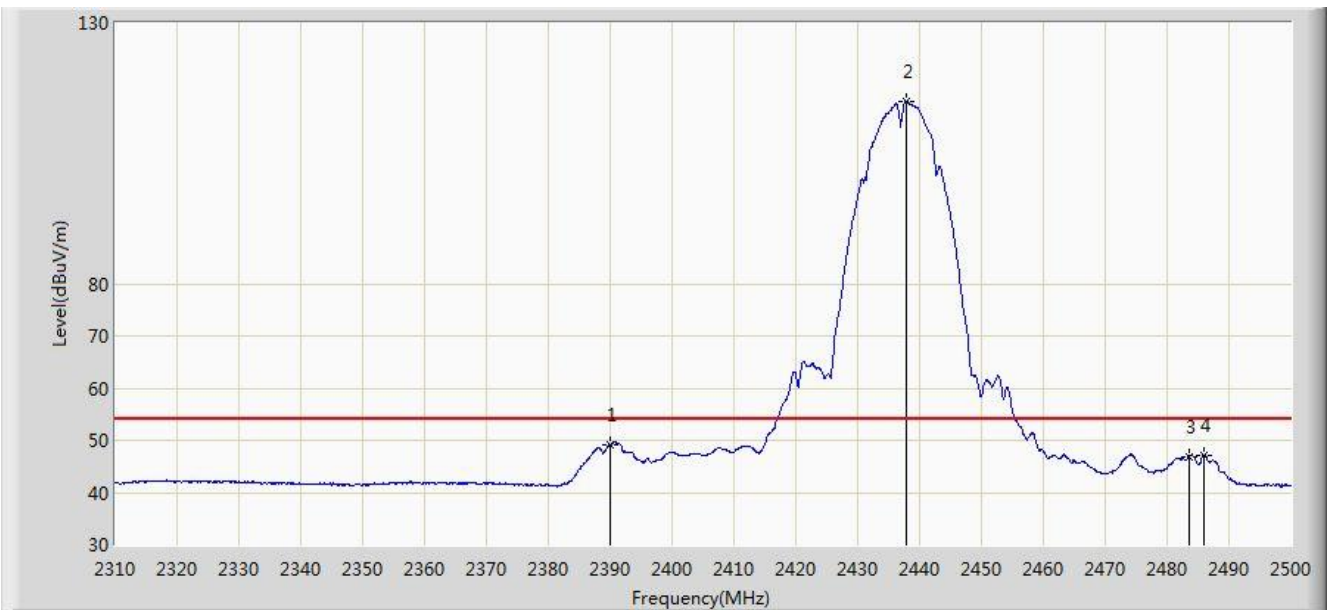


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.122	16.568	-4.878	54.000	32.554	AV
2		*	2437.775	114.910	82.415	N/A	N/A	32.494	AV
3			2483.500	46.742	14.161	-7.258	54.000	32.580	AV
4			2486.035	47.206	14.618	-6.794	54.000	32.588	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 21:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2462MHz	

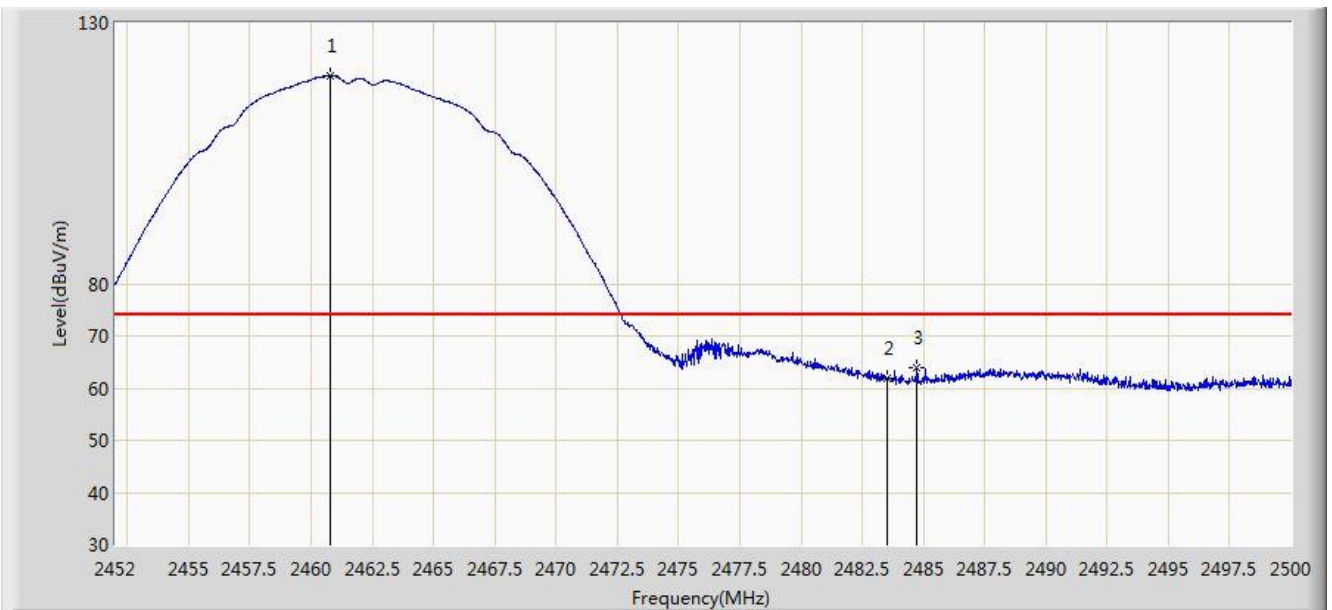

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.808	119.795	87.281	N/A	N/A	32.514	PK
2			2483.500	61.780	29.199	-12.220	74.000	32.580	PK
3			2484.736	64.037	31.453	-9.963	74.000	32.584	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 21:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2462MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.264	116.270	83.755	N/A	N/A	32.515	AV
2			2483.500	47.259	14.678	-6.741	54.000	32.580	AV
3			2488.528	51.561	18.965	-2.439	54.000	32.595	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 21:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2462MHz	

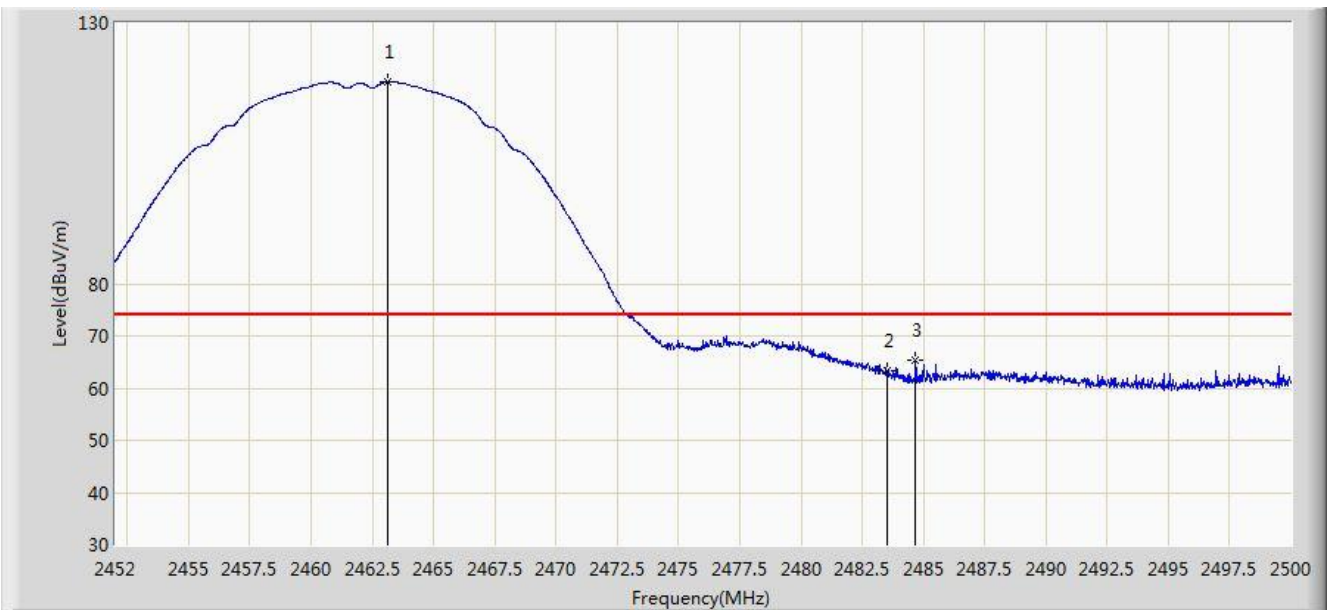

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.136	118.659	86.139	N/A	N/A	32.520	PK
2			2483.500	63.448	30.867	-10.552	74.000	32.580	PK
3			2484.688	65.257	32.673	-8.743	74.000	32.584	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 21:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2462MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.800	114.709	82.190	N/A	N/A	32.518	AV
2			2483.500	51.605	19.024	-2.395	54.000	32.580	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 22:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2412MHz	

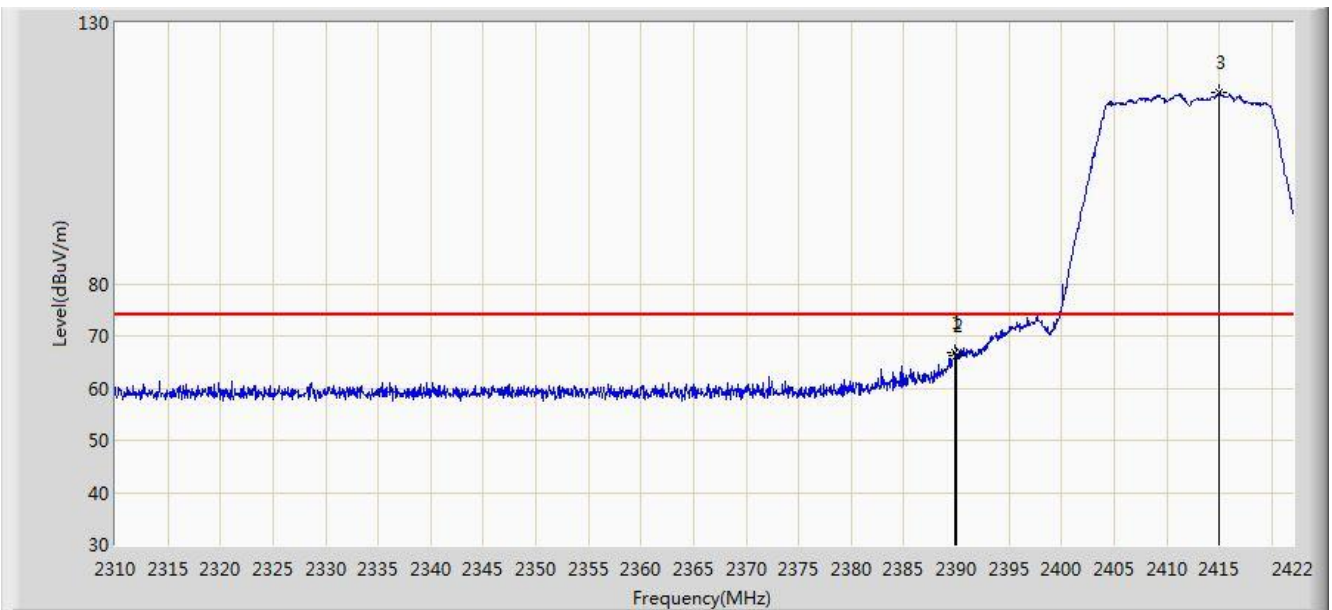


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.912	66.788	34.233	-7.212	74.000	32.555	PK
2			2390.000	66.130	33.576	-7.870	74.000	32.554	PK
3		*	2415.000	116.538	84.016	N/A	N/A	32.522	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 22:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2412MHz	

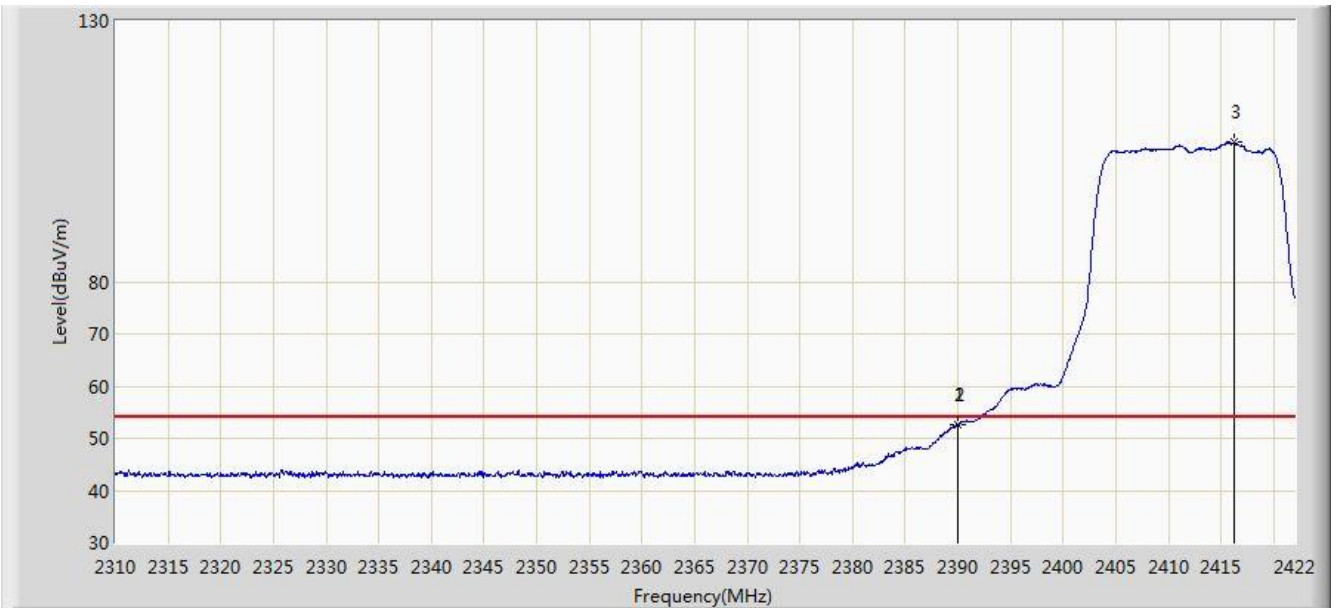


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.968	52.662	20.108	-1.338	54.000	32.554	AV
2			2390.000	52.655	20.101	-1.345	54.000	32.554	AV
3		*	2416.232	106.710	74.189	N/A	N/A	32.520	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 22:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2412MHz	

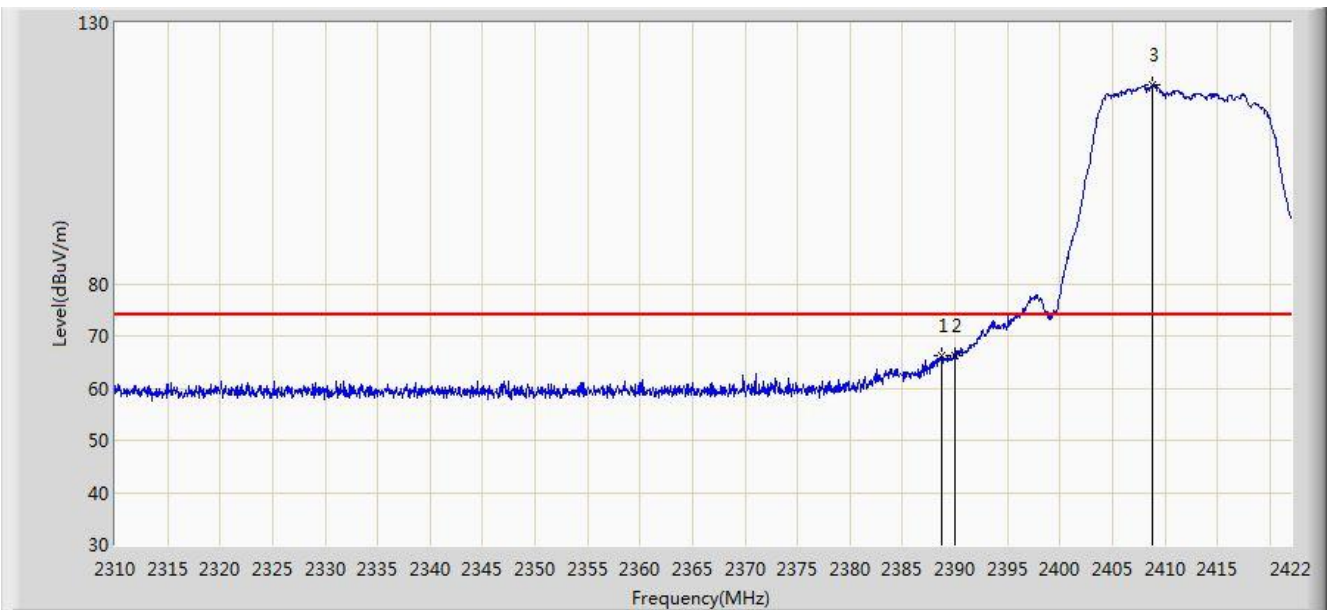


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.792	66.367	33.811	-7.633	74.000	32.556	PK
2			2390.000	66.262	33.708	-7.738	74.000	32.554	PK
3		*	2408.840	118.041	85.511	N/A	N/A	32.529	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 22:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2412MHz	

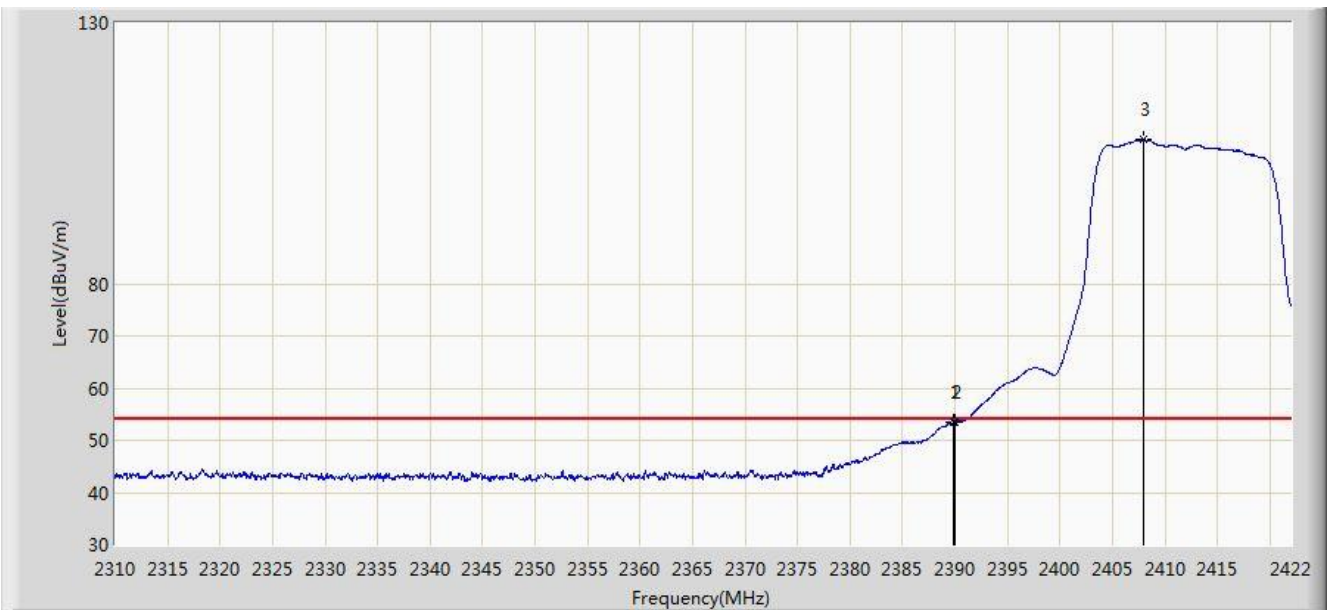


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.856	53.498	20.943	-0.502	54.000	32.555	AV
2			2390.000	53.451	20.897	-0.549	54.000	32.554	AV
3		*	2407.944	107.632	75.101	N/A	N/A	32.531	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 22:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2417MHz	

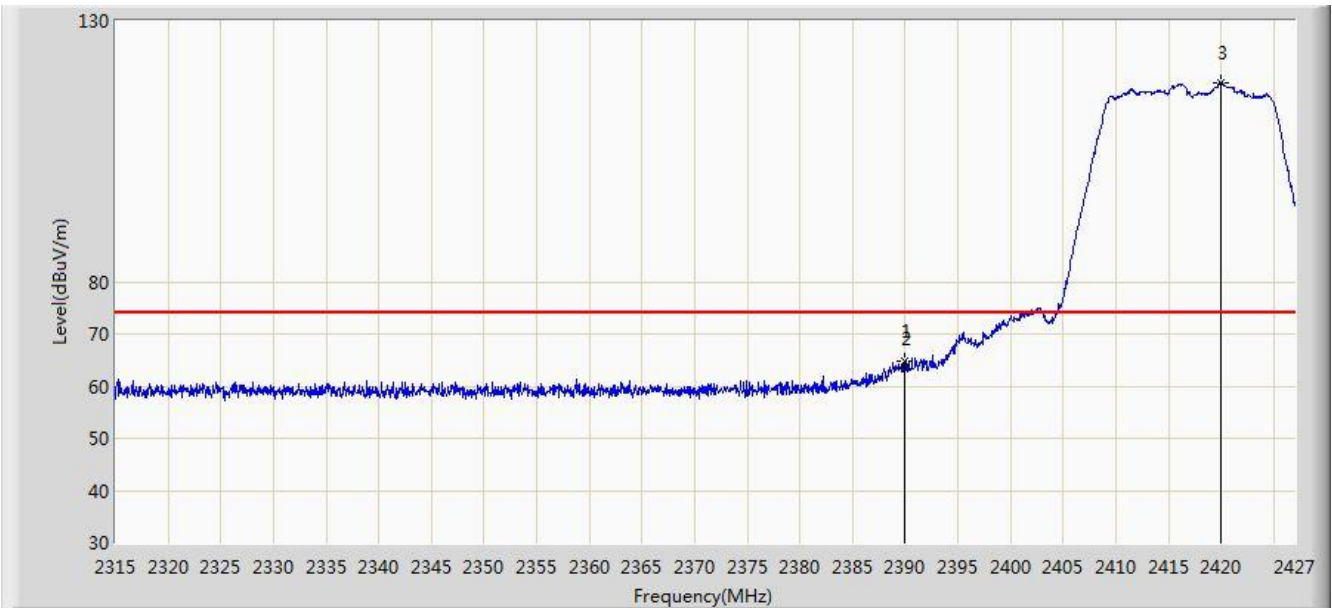


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.928	64.700	32.145	-9.300	74.000	32.555	PK
2			2390.000	63.265	30.711	-10.735	74.000	32.554	PK
3		*	2420.000	118.209	85.693	N/A	N/A	32.516	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 22:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2417MHz	

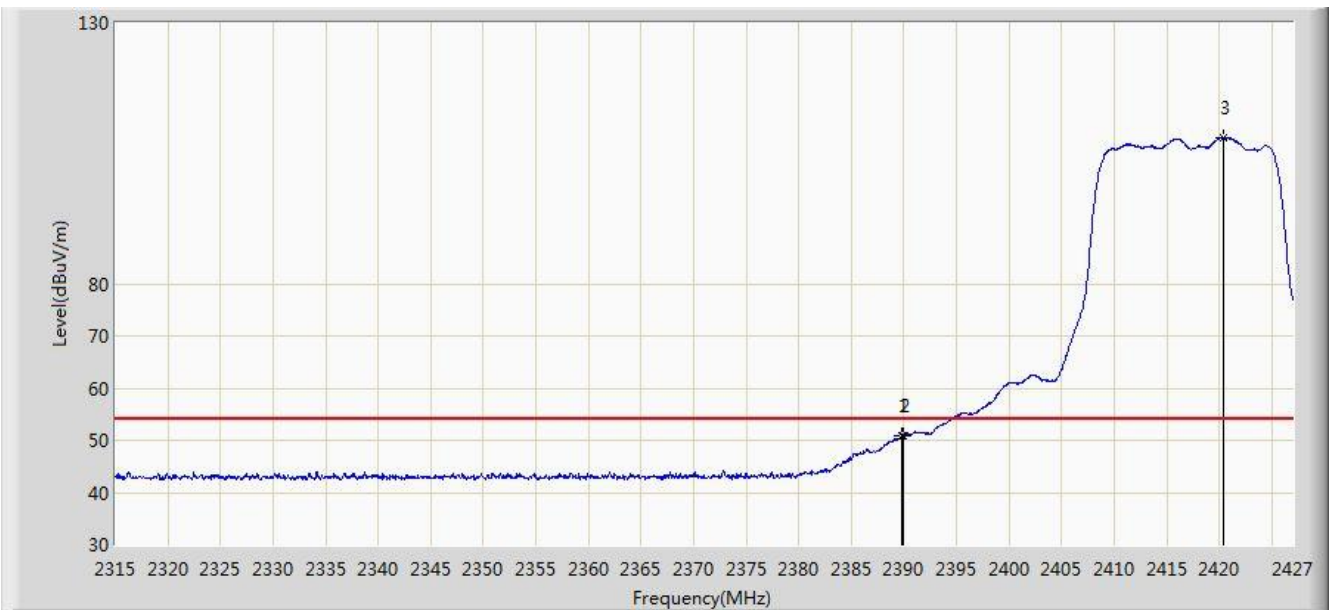


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.872	50.795	18.240	-3.205	54.000	32.555	AV
2			2390.000	50.761	18.207	-3.239	54.000	32.554	AV
3		*	2420.448	108.055	75.539	N/A	N/A	32.515	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 22:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2417MHz	

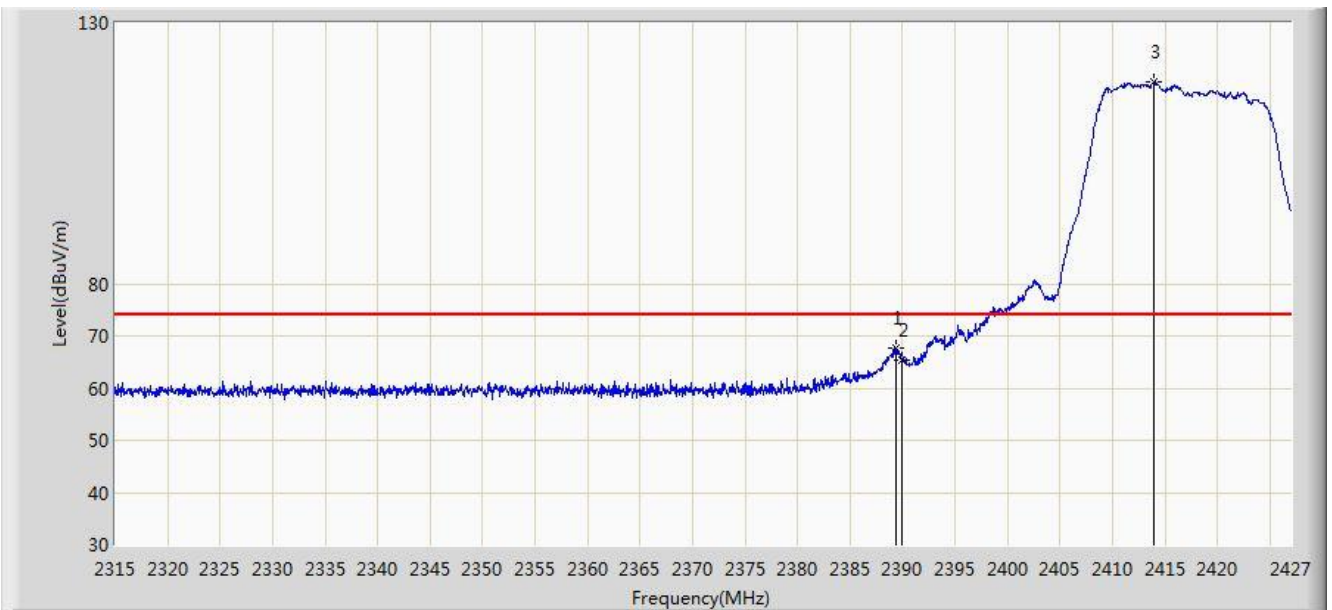


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.424	67.709	35.154	-6.291	74.000	32.555	PK
2			2390.000	65.226	32.672	-8.774	74.000	32.554	PK
3		*	2414.008	118.717	86.194	N/A	N/A	32.523	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 22:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2417MHz	

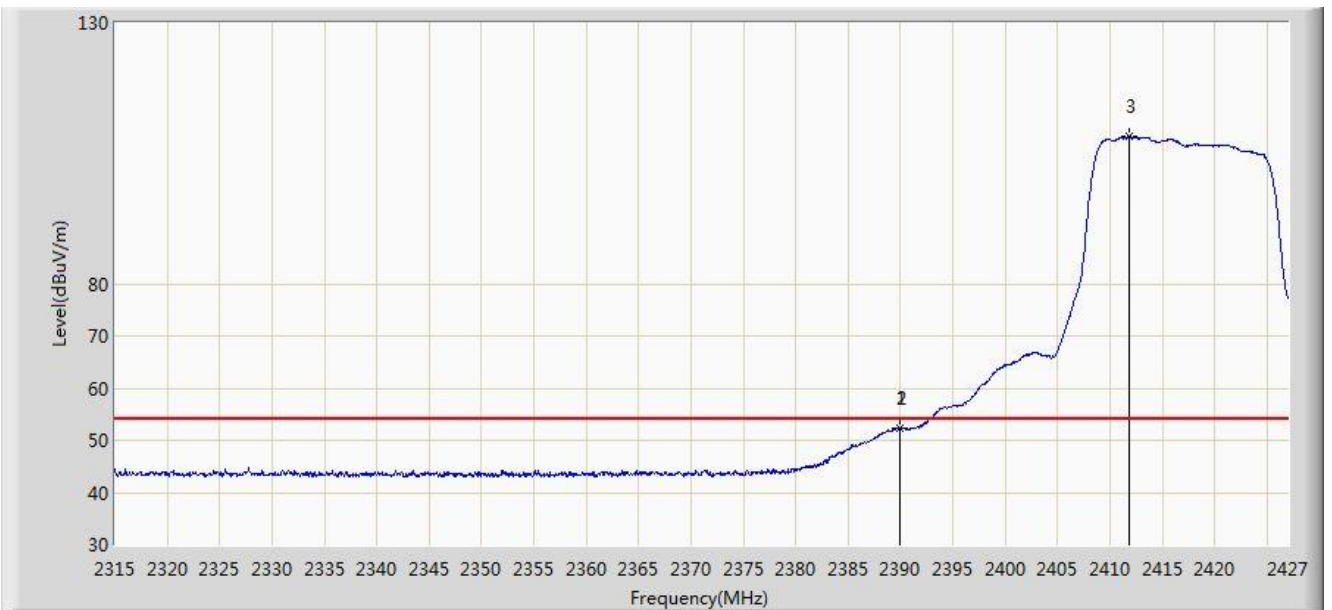


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.984	52.341	19.787	-1.659	54.000	32.554	AV
2			2390.000	52.327	19.773	-1.673	54.000	32.554	AV
3		*	2411.824	108.190	75.664	N/A	N/A	32.526	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 22:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2437MHz	

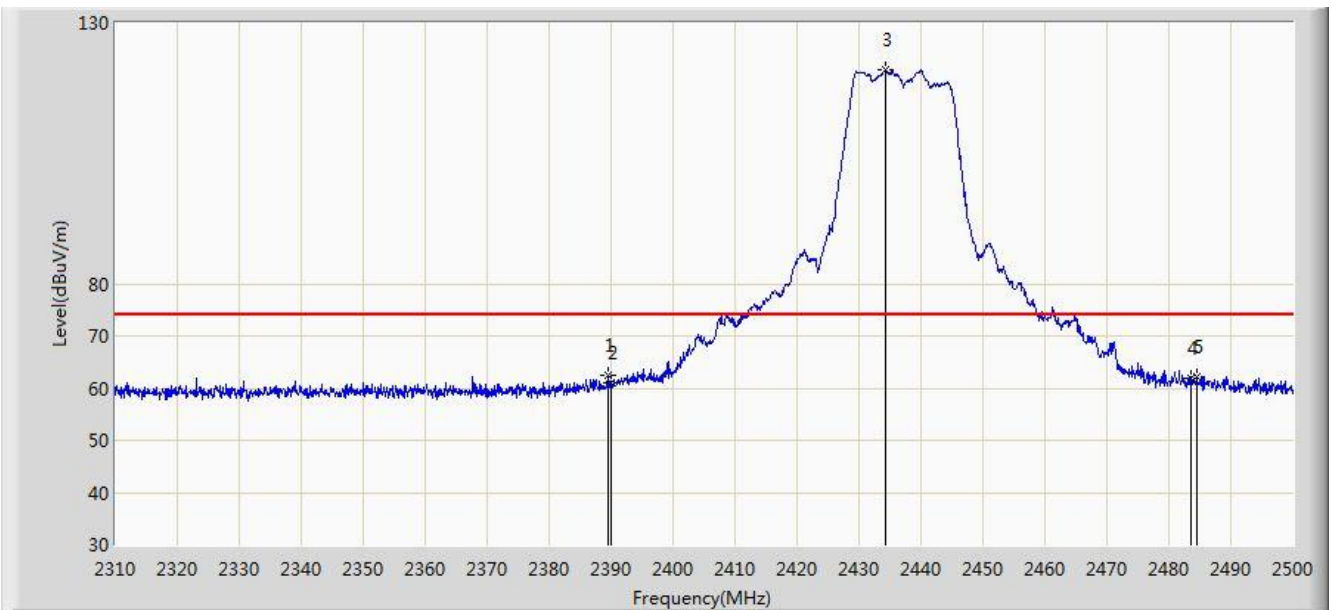


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.420	62.367	29.812	-11.633	74.000	32.555	PK
2			2390.000	61.122	28.568	-12.878	74.000	32.554	PK
3		*	2434.355	120.947	88.448	N/A	N/A	32.499	PK
4			2483.500	61.756	29.175	-12.244	74.000	32.580	PK
5			2484.515	62.155	29.571	-11.845	74.000	32.584	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 22:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2437MHz	

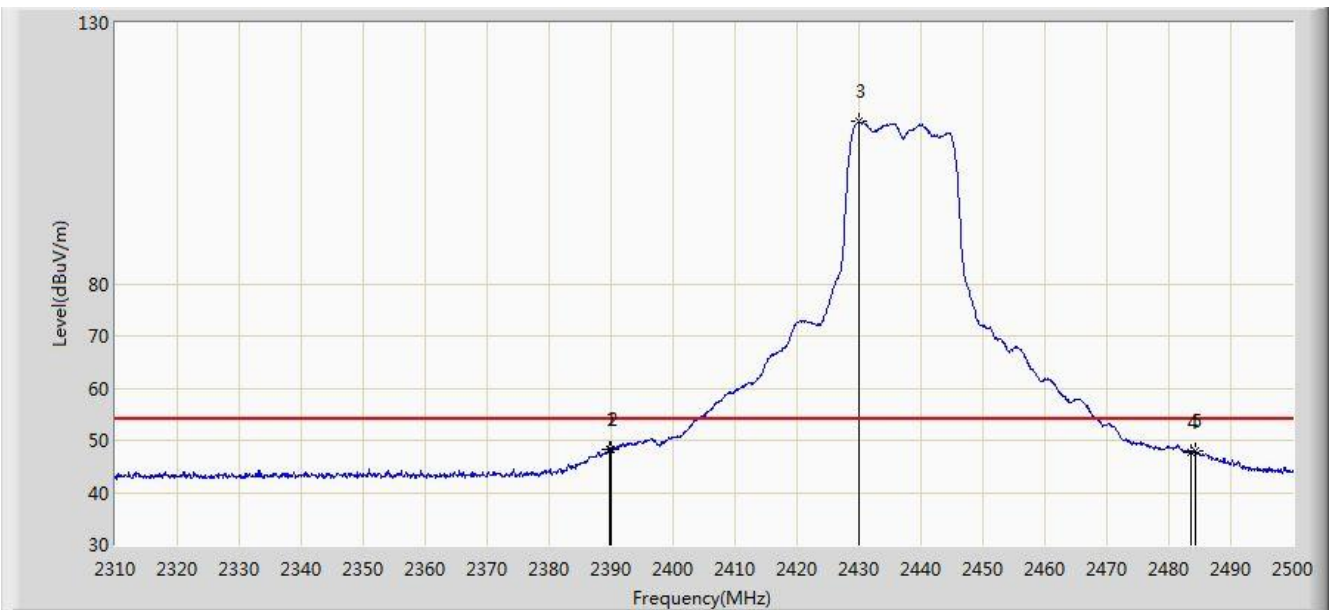


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.800	48.311	15.756	-5.689	54.000	32.555	AV
2			2390.000	48.297	15.743	-5.703	54.000	32.554	AV
3		*	2429.985	111.070	78.566	N/A	N/A	32.504	AV
4			2483.500	47.730	15.149	-6.270	54.000	32.580	AV
5			2484.230	48.099	15.516	-5.901	54.000	32.583	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 22:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2437MHz	

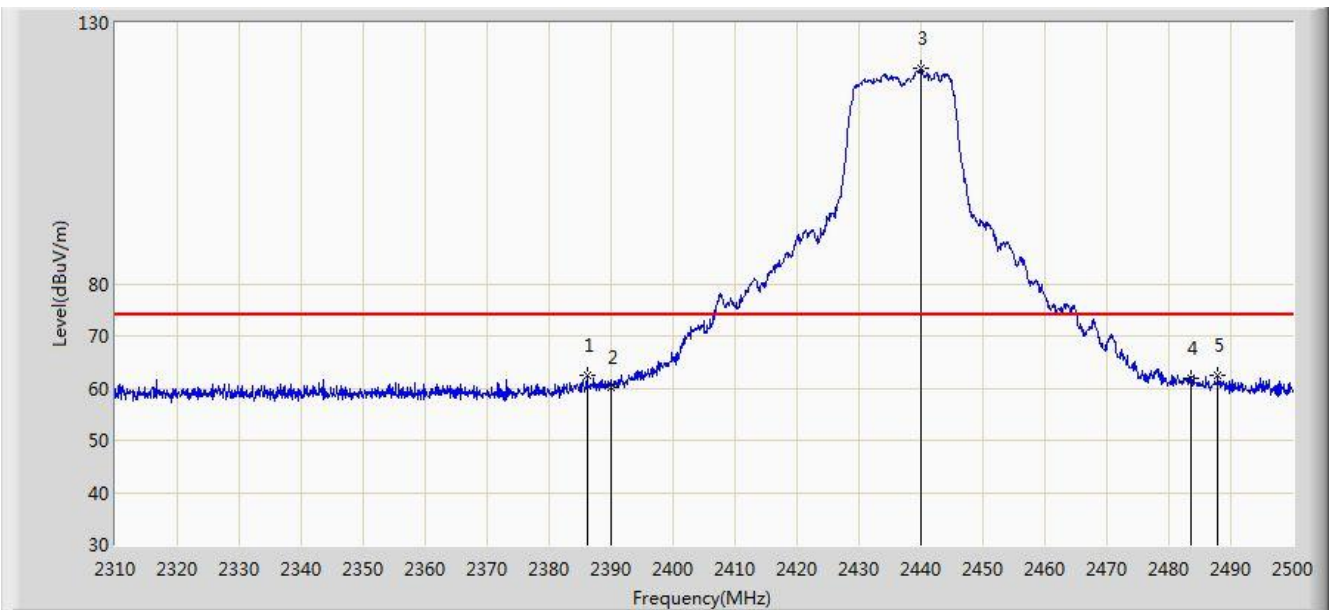


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.095	62.436	29.876	-11.564	74.000	32.559	PK
2			2390.000	60.101	27.547	-13.899	74.000	32.554	PK
3		*	2439.960	121.201	88.709	N/A	N/A	32.492	PK
4			2483.500	61.861	29.280	-12.139	74.000	32.580	PK
5			2487.935	62.466	29.872	-11.534	74.000	32.594	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 22:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2437MHz	

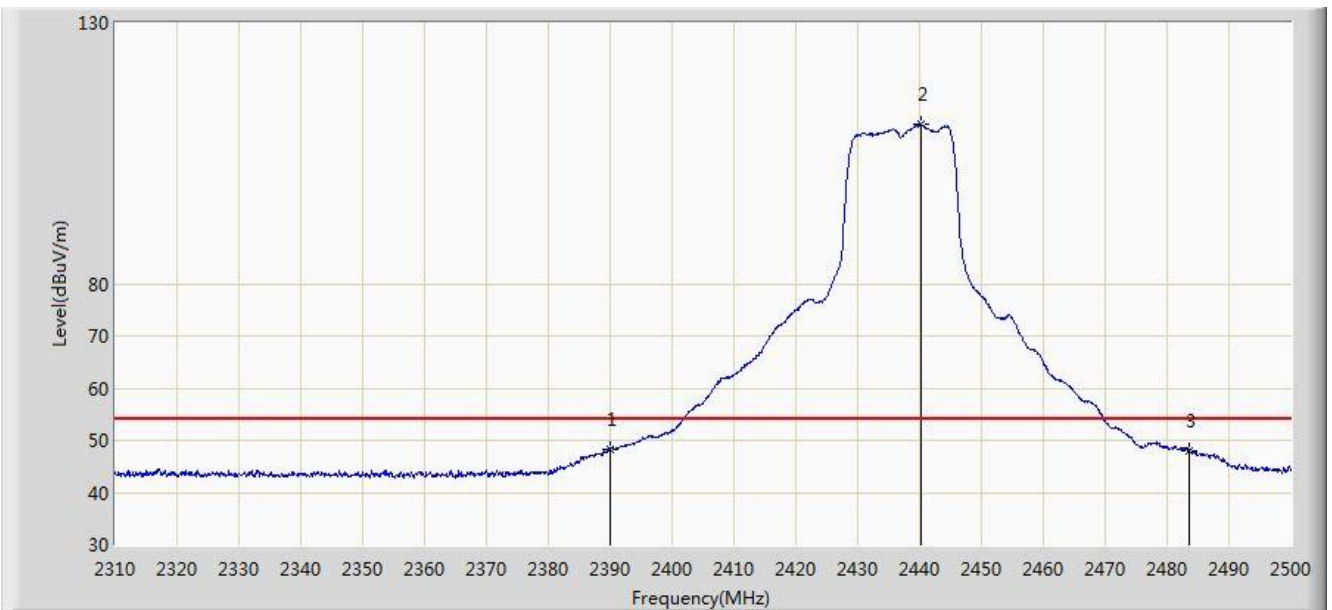


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	48.308	15.754	-5.692	54.000	32.554	AV
2		*	2440.245	110.587	78.095	N/A	N/A	32.492	AV
3			2483.500	48.088	15.507	-5.912	54.000	32.580	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 22:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2462MHz	

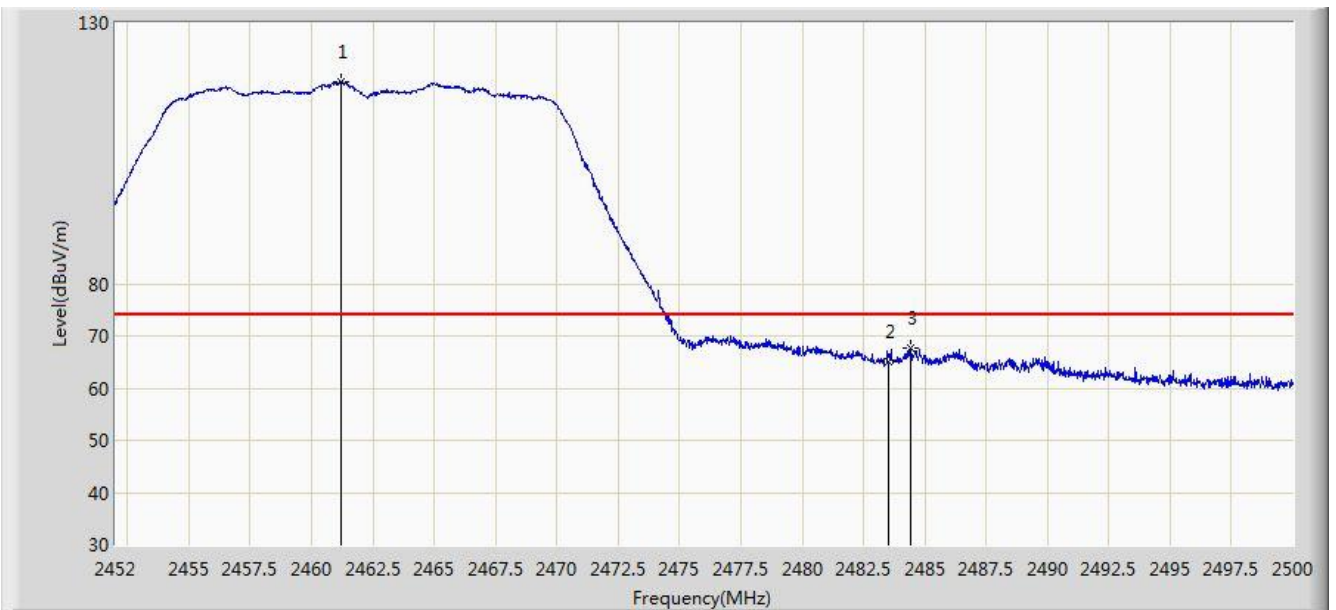


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.192	118.583	86.068	N/A	N/A	32.515	PK
2			2483.500	65.104	32.523	-8.896	74.000	32.580	PK
3			2484.448	67.612	35.029	-6.388	74.000	32.584	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 22:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2462MHz	

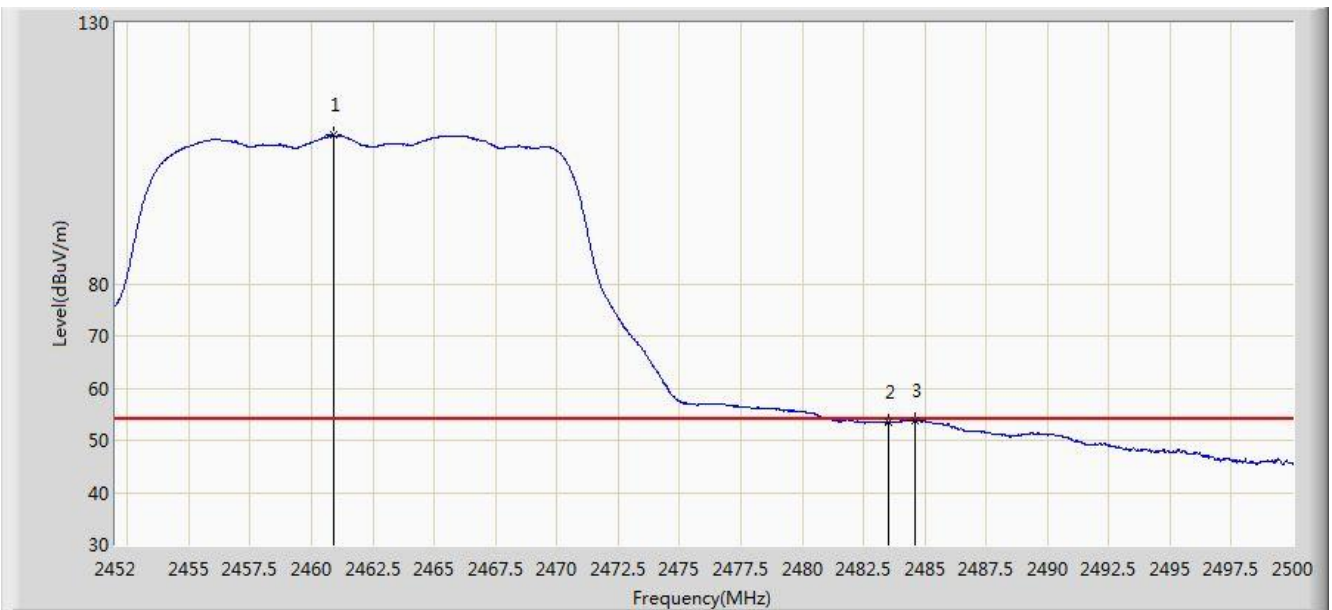


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.904	108.458	75.944	N/A	N/A	32.514	AV
2			2483.500	53.416	20.835	-0.584	54.000	32.580	AV
3			2484.616	53.829	21.245	-0.171	54.000	32.584	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 22:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2462MHz	

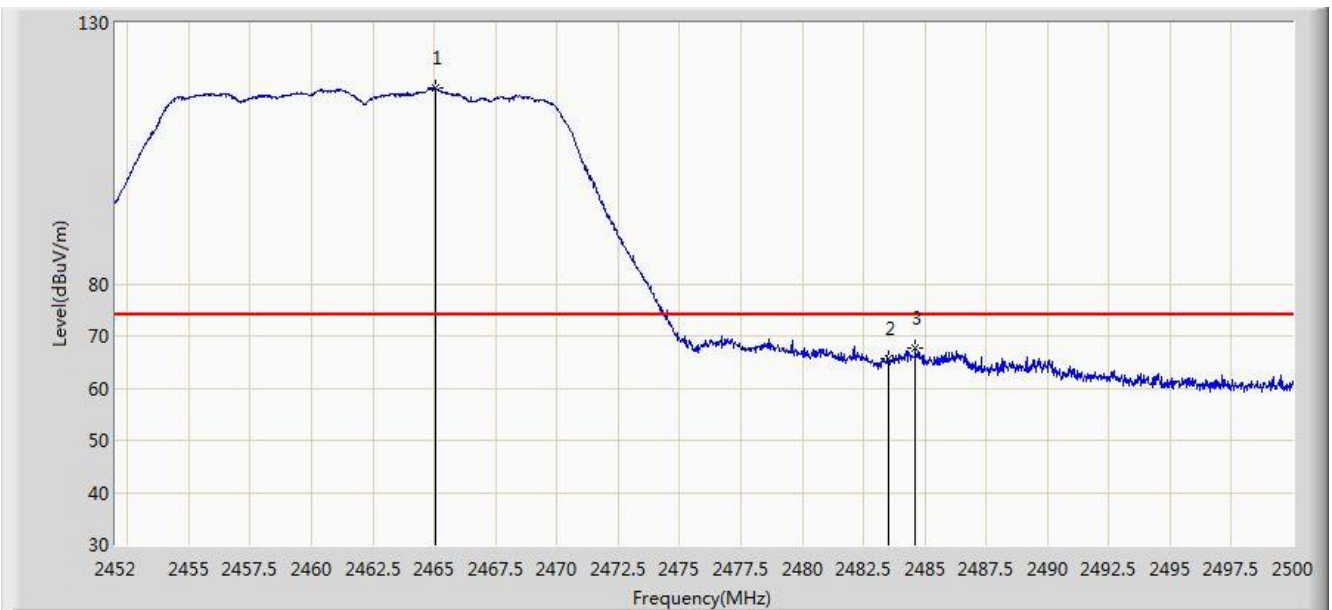


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2465.032	117.480	84.955	N/A	N/A	32.525	PK
2			2483.500	65.636	33.055	-8.364	74.000	32.580	PK
3			2484.616	67.537	34.953	-6.463	74.000	32.584	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 22:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2462MHz	

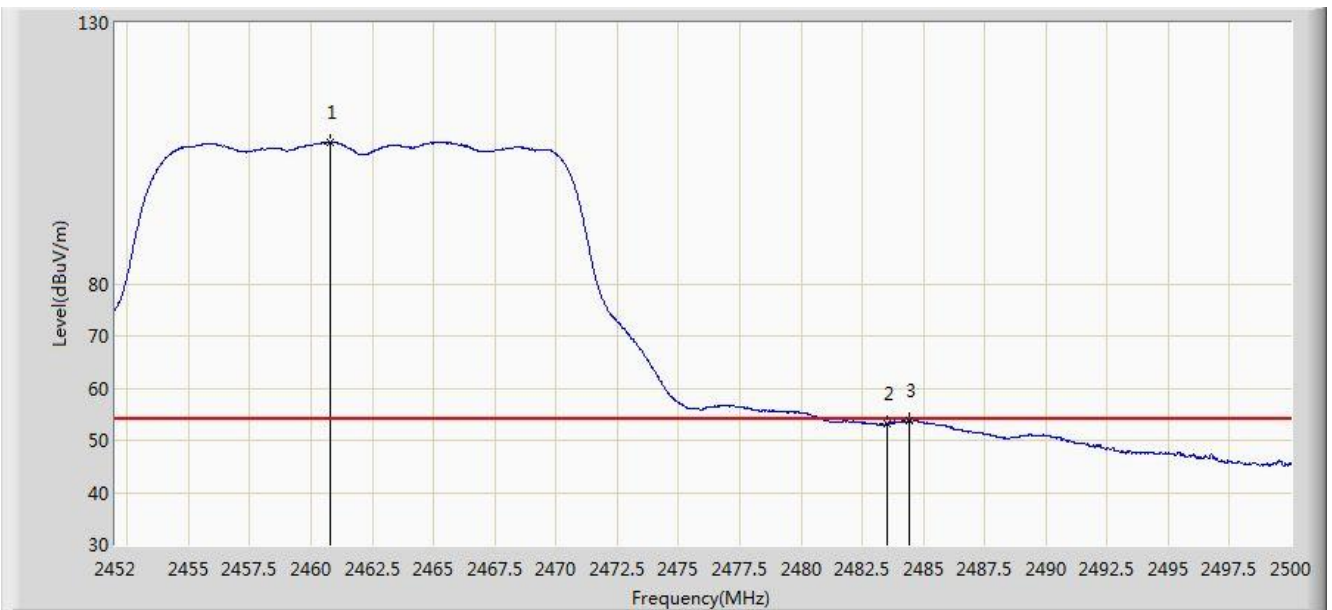


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.784	107.235	74.721	N/A	N/A	32.514	AV
2			2483.500	53.169	20.588	-0.831	54.000	32.580	AV
3			2484.400	53.783	21.200	-0.217	54.000	32.583	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 23:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz	

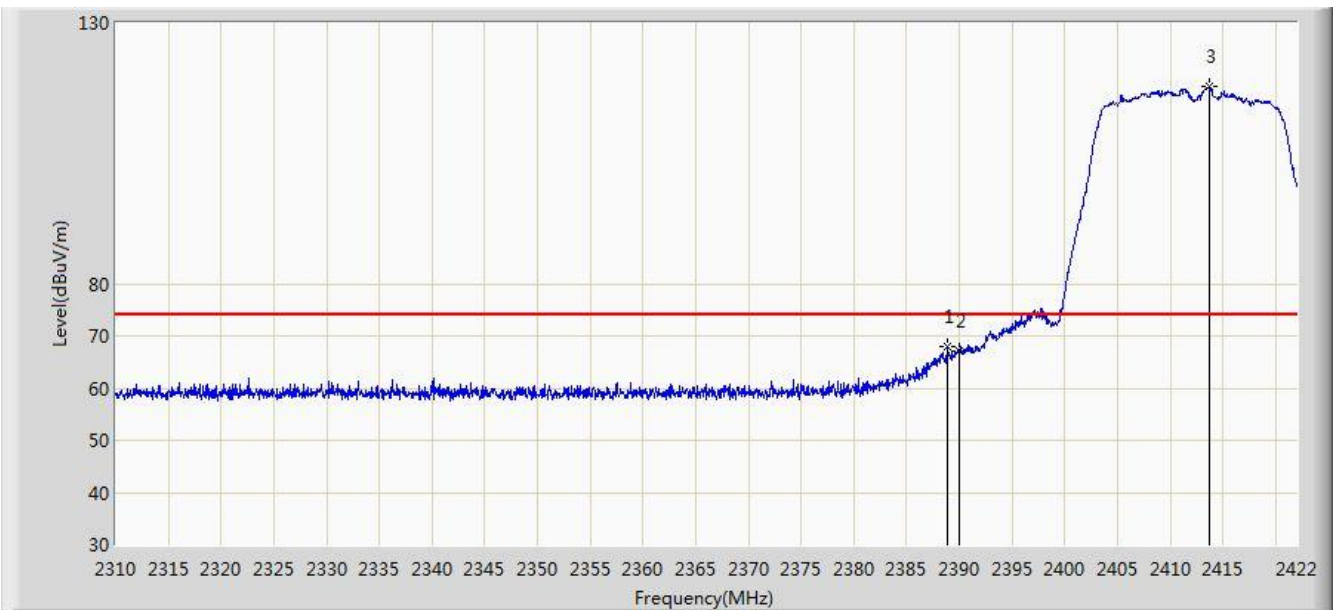


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.904	67.878	35.322	-6.122	74.000	32.556	PK
2			2390.000	67.076	34.522	-6.924	74.000	32.554	PK
3		*	2413.656	117.764	85.240	N/A	N/A	32.524	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 23:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz	

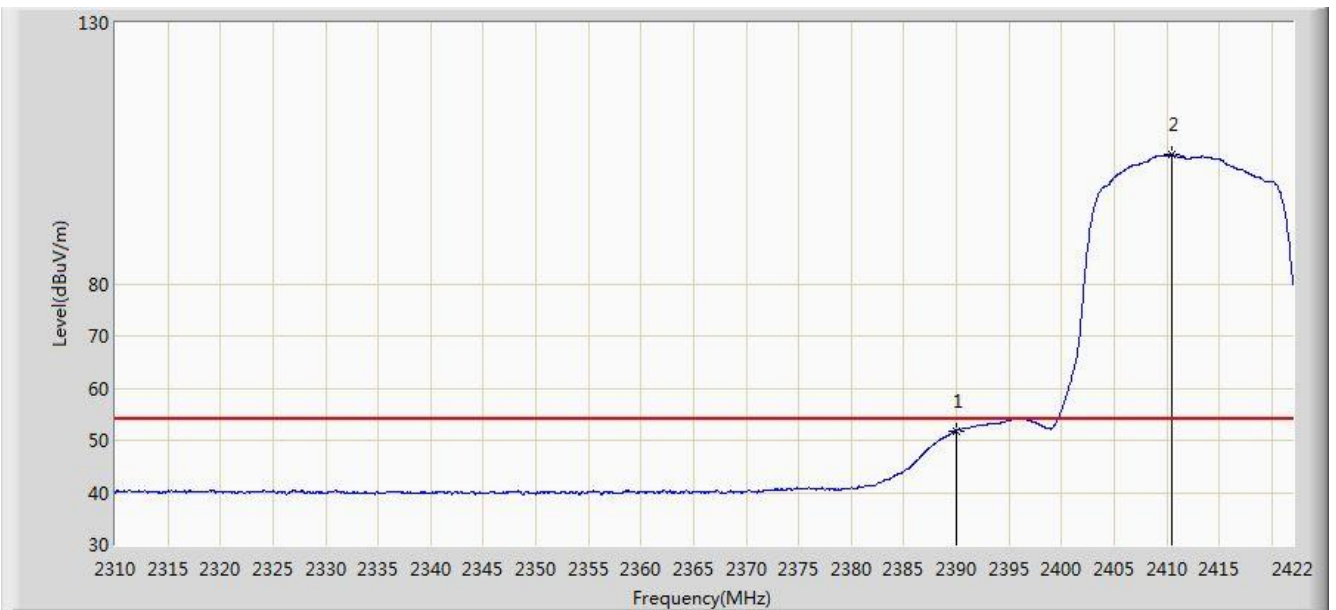


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.872	19.318	-2.128	54.000	32.554	AV
2		*	2410.520	104.722	72.195	N/A	N/A	32.527	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 23:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz	

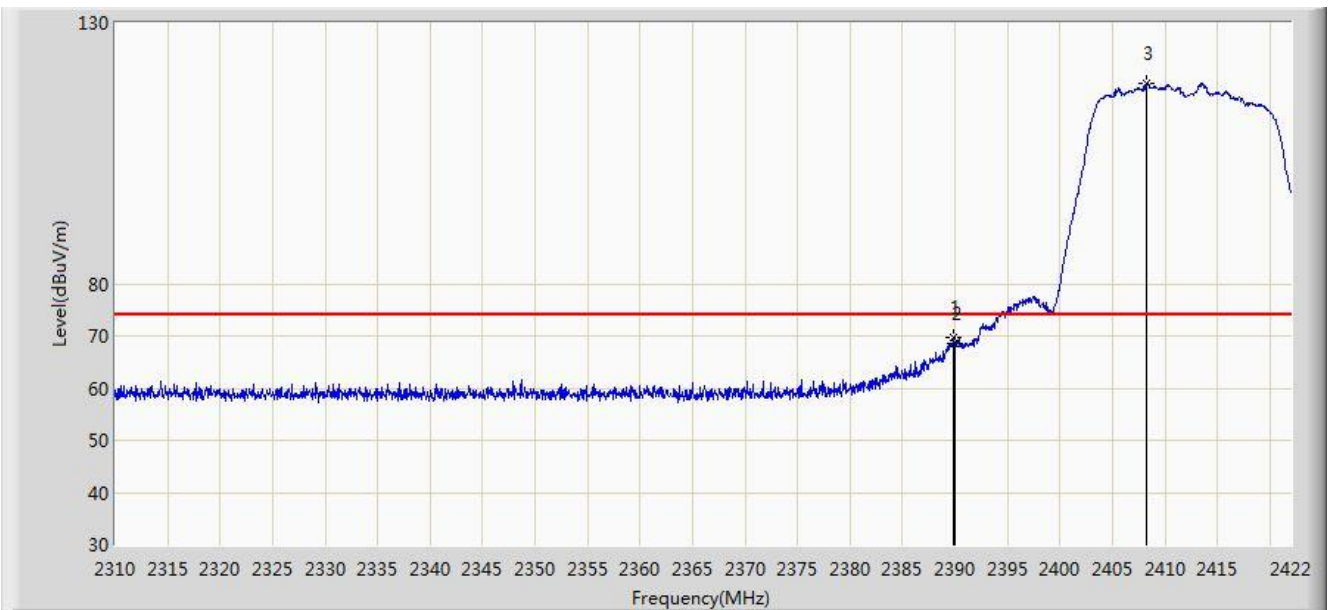


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.912	69.649	37.094	-4.351	74.000	32.555	PK
2			2390.000	68.457	35.903	-5.543	74.000	32.554	PK
3		*	2408.280	118.408	85.878	N/A	N/A	32.531	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 23:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz	

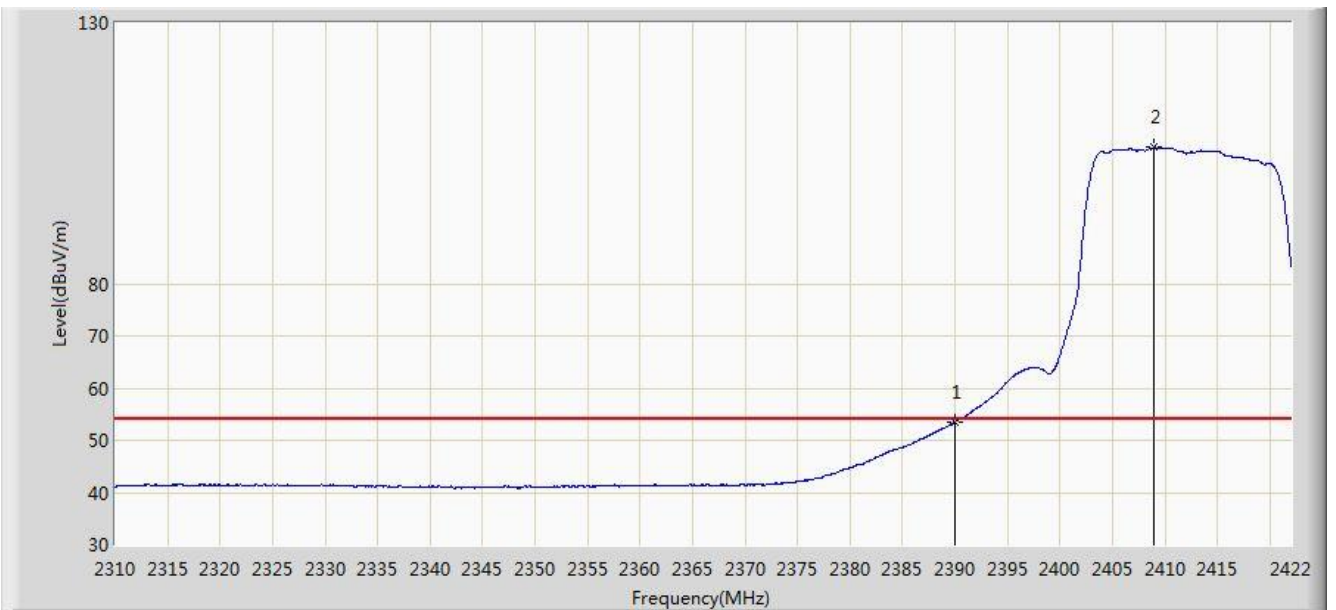


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.578	21.024	-0.422	54.000	32.554	AV
2		*	2409.008	106.103	73.574	N/A	N/A	32.530	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 23:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2417MHz	

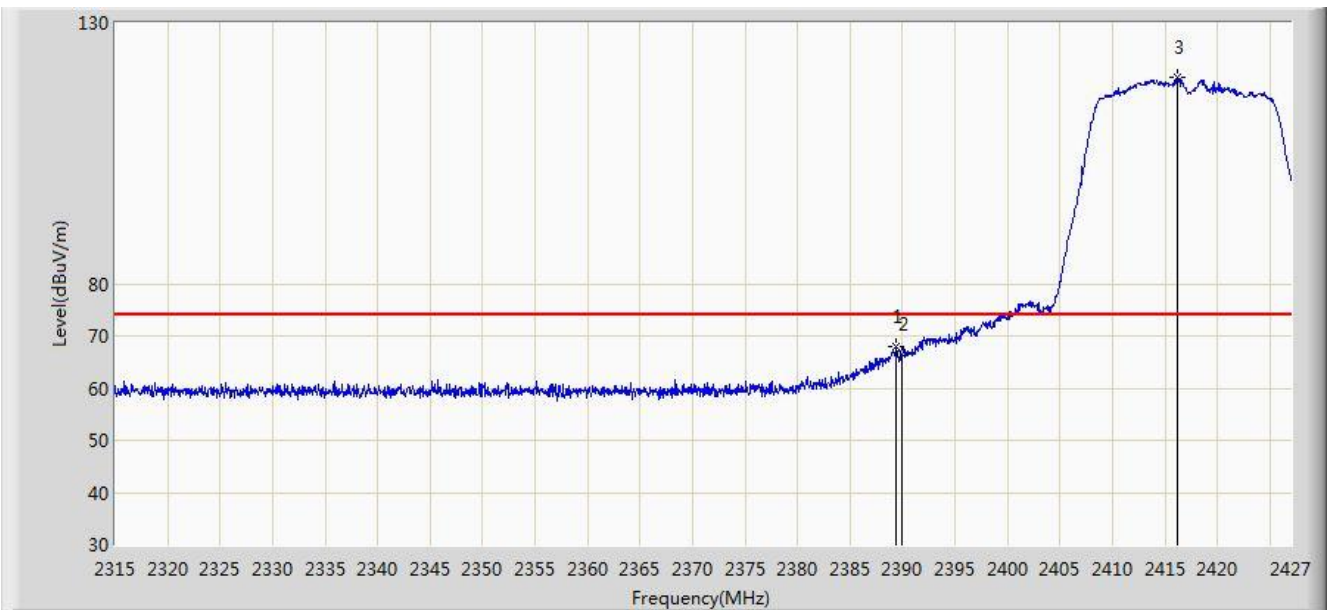


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.424	67.975	35.420	-6.025	74.000	32.555	PK
2			2390.000	66.405	33.851	-7.595	74.000	32.554	PK
3		*	2416.248	119.469	86.948	N/A	N/A	32.520	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 23:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2417MHz	

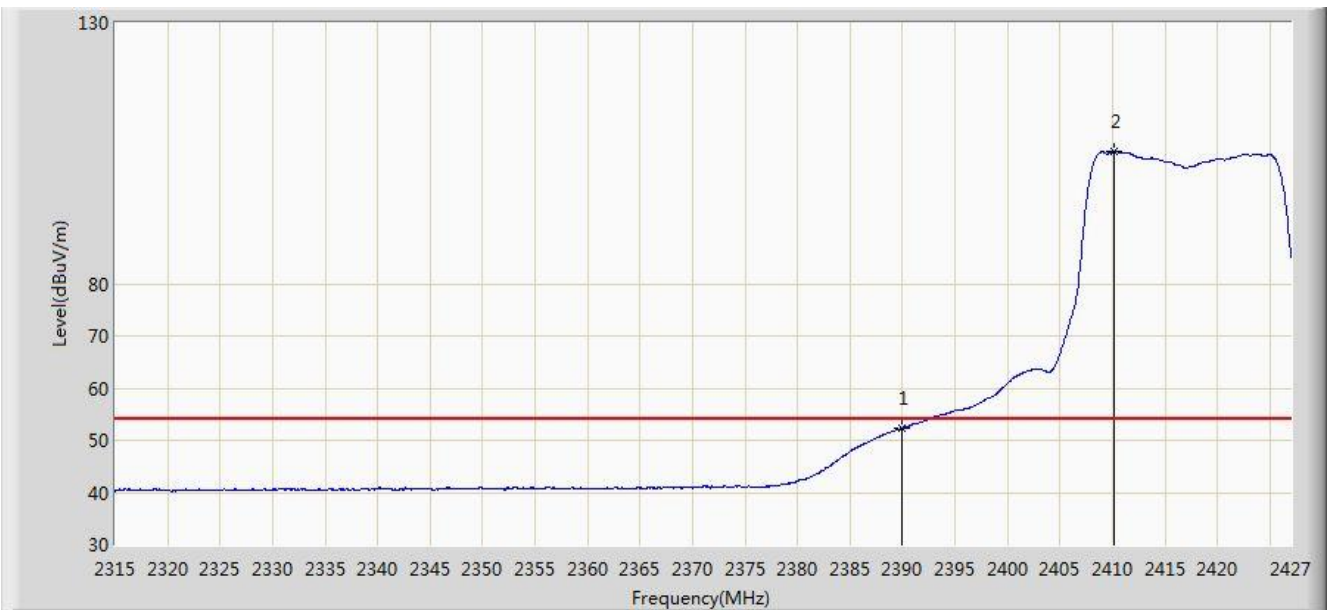


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.280	19.726	-1.720	54.000	32.554	AV
2		*	2410.144	105.326	72.798	N/A	N/A	32.528	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 23:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2417MHz	

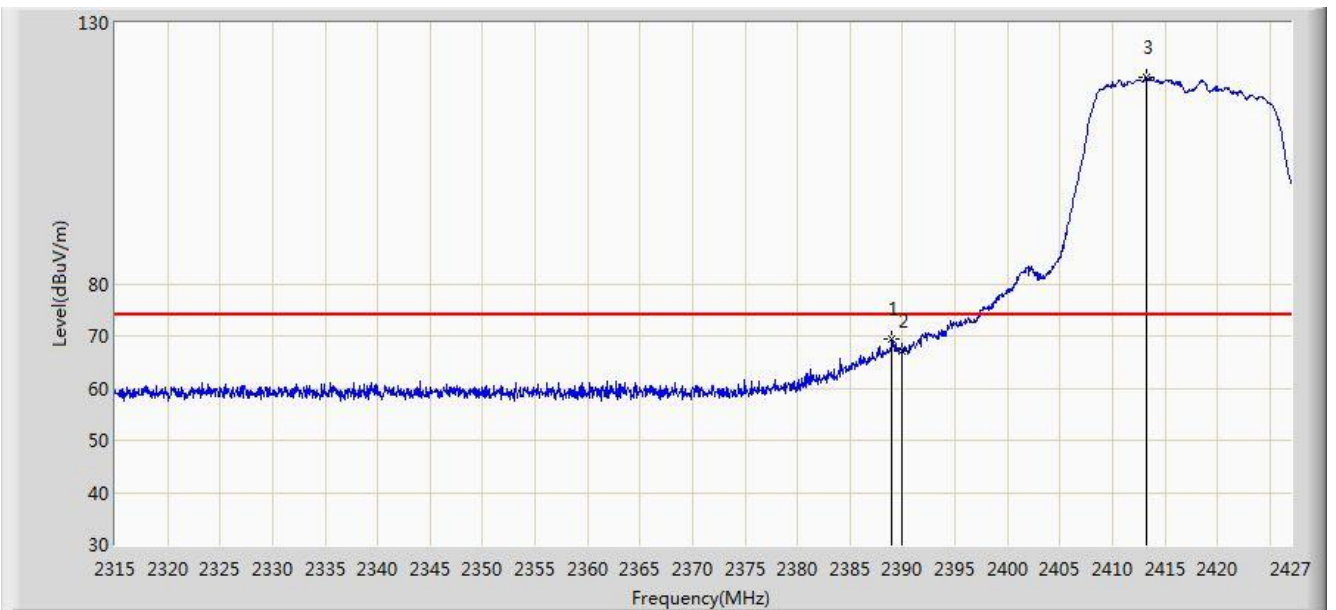


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.032	69.323	36.767	-4.677	74.000	32.556	PK
2			2390.000	67.239	34.685	-6.761	74.000	32.554	PK
3		*	2413.280	119.583	87.059	N/A	N/A	32.525	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 23:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2417MHz	

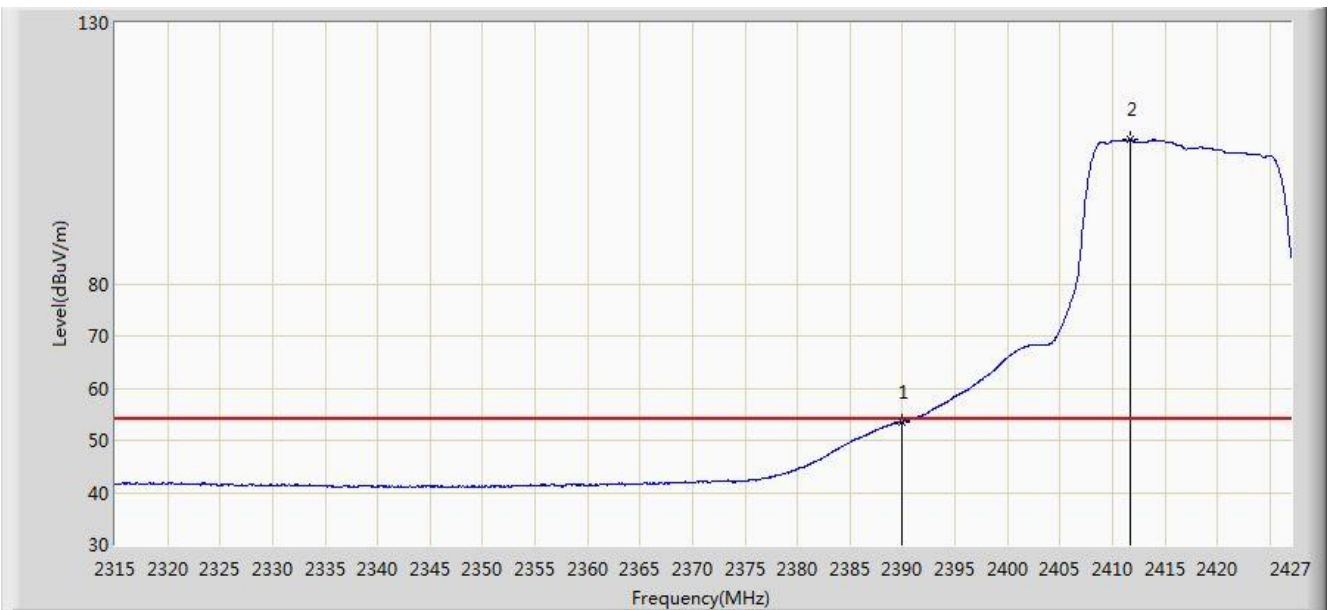


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.515	20.961	-0.485	54.000	32.554	AV
2		*	2411.656	107.598	75.072	N/A	N/A	32.526	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

aSite: AC1	Time: 2018/06/20 - 23:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz	

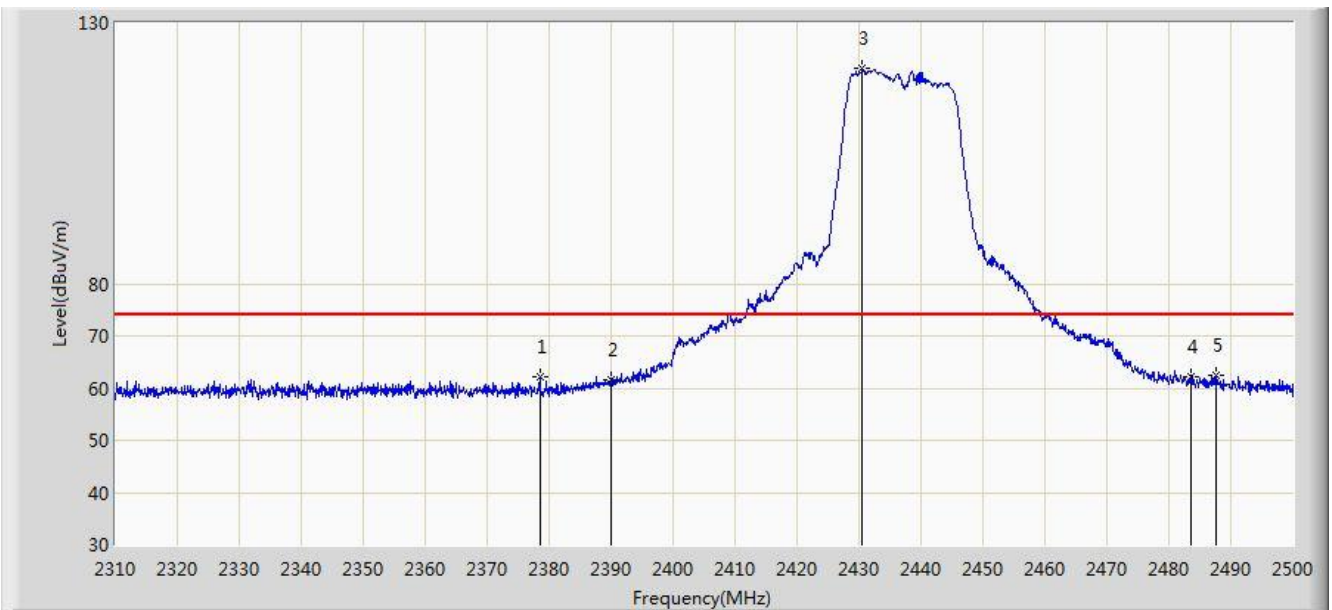


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2378.495	62.127	29.557	-11.873	74.000	32.570	PK
2			2390.000	61.652	29.098	-12.348	74.000	32.554	PK
3		*	2430.555	121.345	88.841	N/A	N/A	32.504	PK
4			2483.500	62.187	29.606	-11.813	74.000	32.580	PK
5			2487.555	62.522	29.929	-11.478	74.000	32.593	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 23:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz	

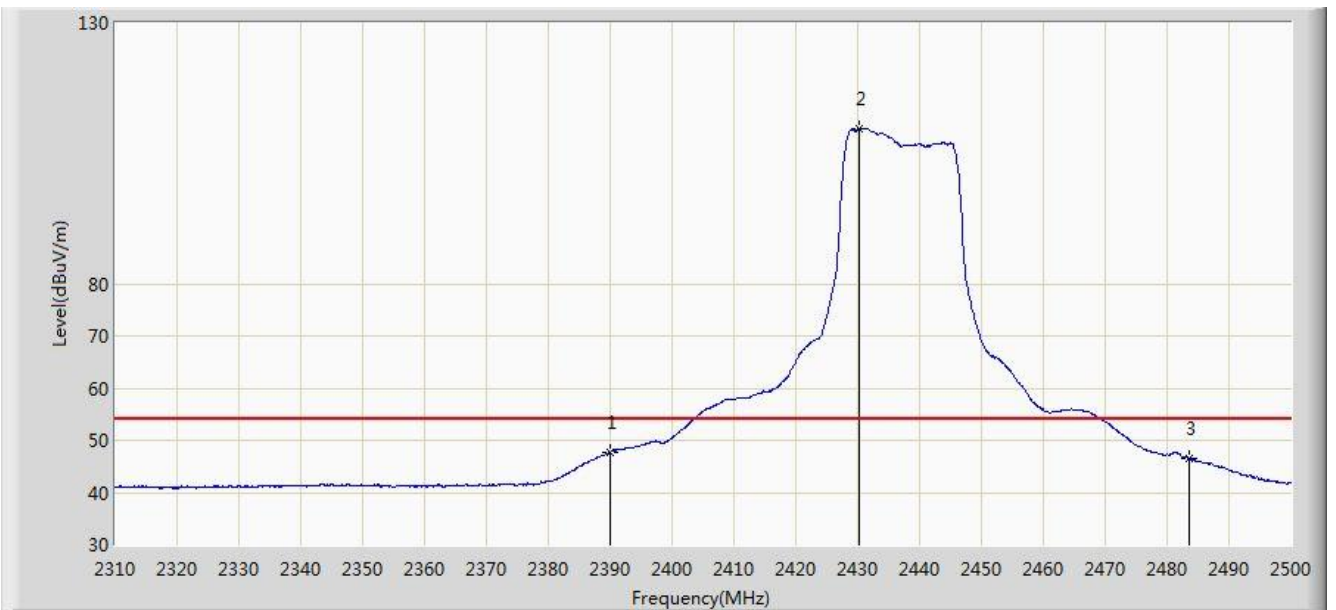


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.714	15.160	-6.286	54.000	32.554	AV
2		*	2430.175	109.793	77.289	N/A	N/A	32.504	AV
3			2483.500	46.544	13.963	-7.456	54.000	32.580	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 23:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz	

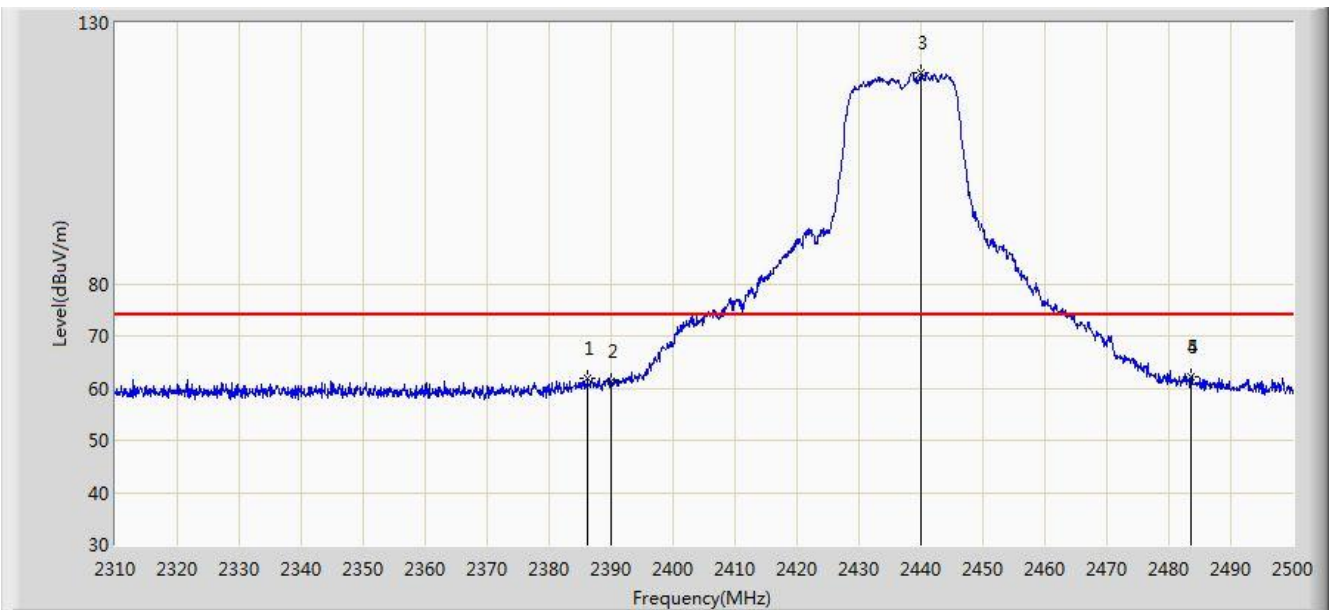


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.190	61.994	29.434	-12.006	74.000	32.559	PK
2			2390.000	61.238	28.684	-12.762	74.000	32.554	PK
3		*	2440.055	120.473	87.981	N/A	N/A	32.492	PK
4			2483.500	62.036	29.455	-11.964	74.000	32.580	PK
5			2483.565	62.289	29.708	-11.711	74.000	32.580	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 23:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz	

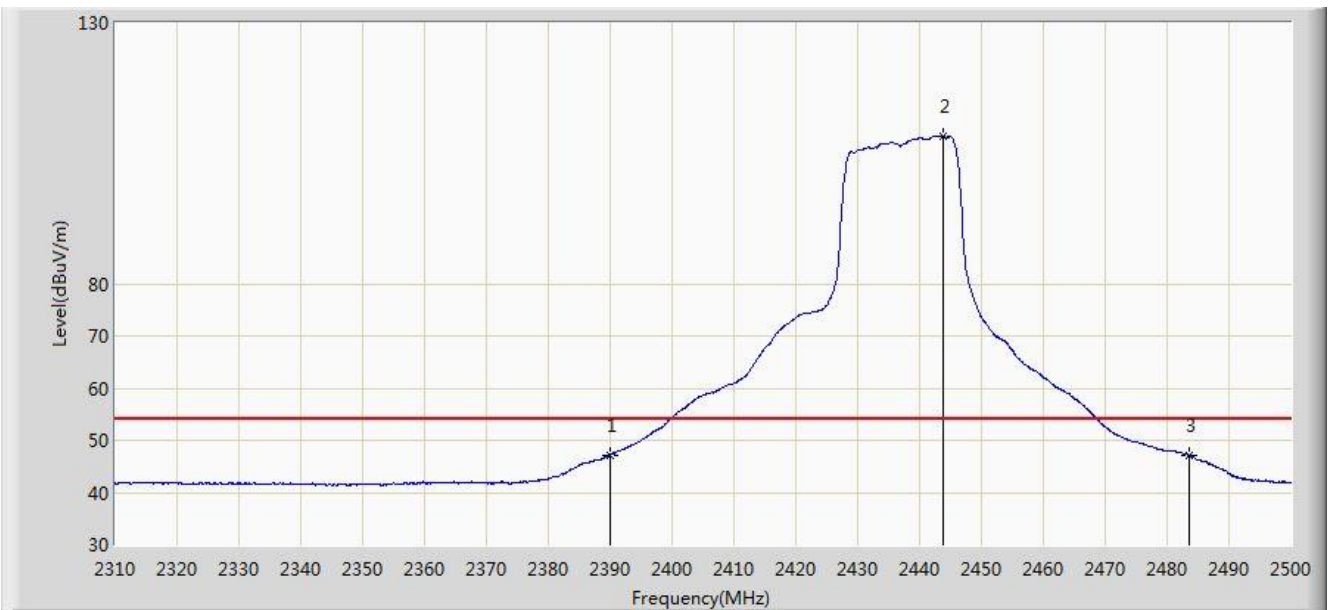


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.238	14.684	-6.762	54.000	32.554	AV
2		*	2443.855	108.333	75.845	N/A	N/A	32.488	AV
3			2483.500	47.109	14.528	-6.891	54.000	32.580	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/21 - 01:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2457MHz	

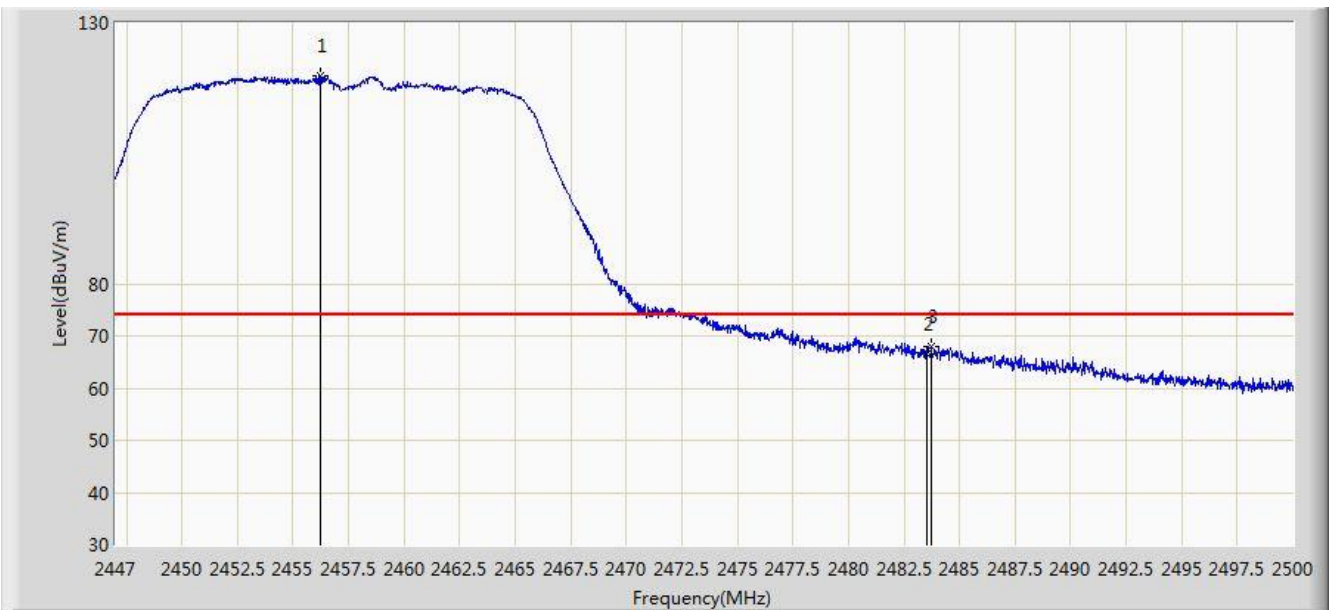


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.249	119.805	87.299	N/A	N/A	32.507	PK
2			2483.500	66.420	33.839	-7.580	74.000	32.580	PK
3			2483.729	67.908	35.327	-6.092	74.000	32.582	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/21 - 01:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2457MHz	

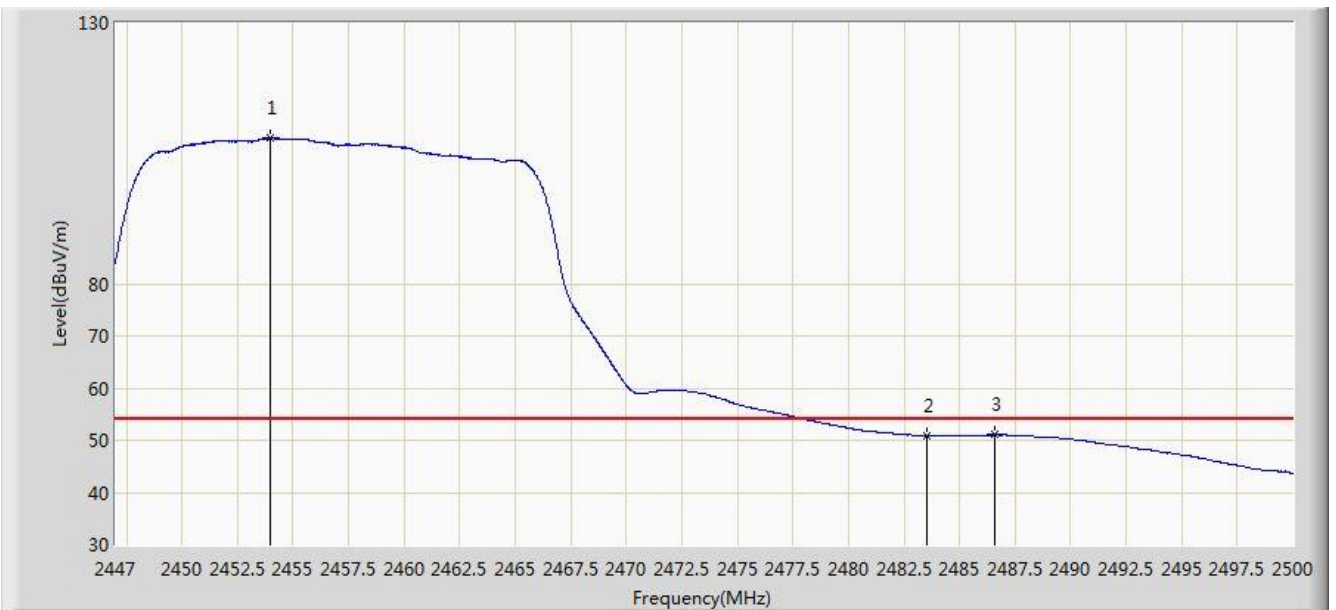


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2453.943	107.928	75.426	N/A	N/A	32.502	AV
2			2483.500	50.883	18.302	-3.117	54.000	32.580	AV
3			2486.564	51.095	18.505	-2.905	54.000	32.590	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/21 - 01:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2457MHz	

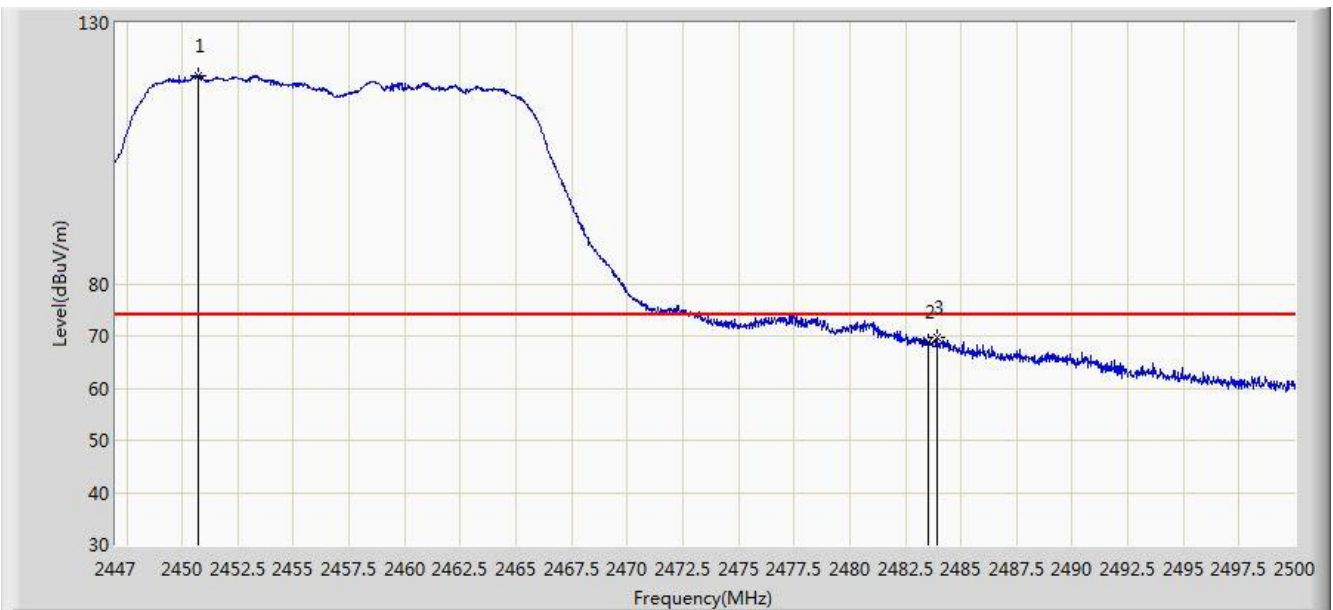


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2450.710	119.864	87.367	N/A	N/A	32.496	PK
2			2483.500	68.698	36.117	-5.302	74.000	32.580	PK
3			2483.915	69.646	37.064	-4.354	74.000	32.582	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/21 - 01:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2457MHz	

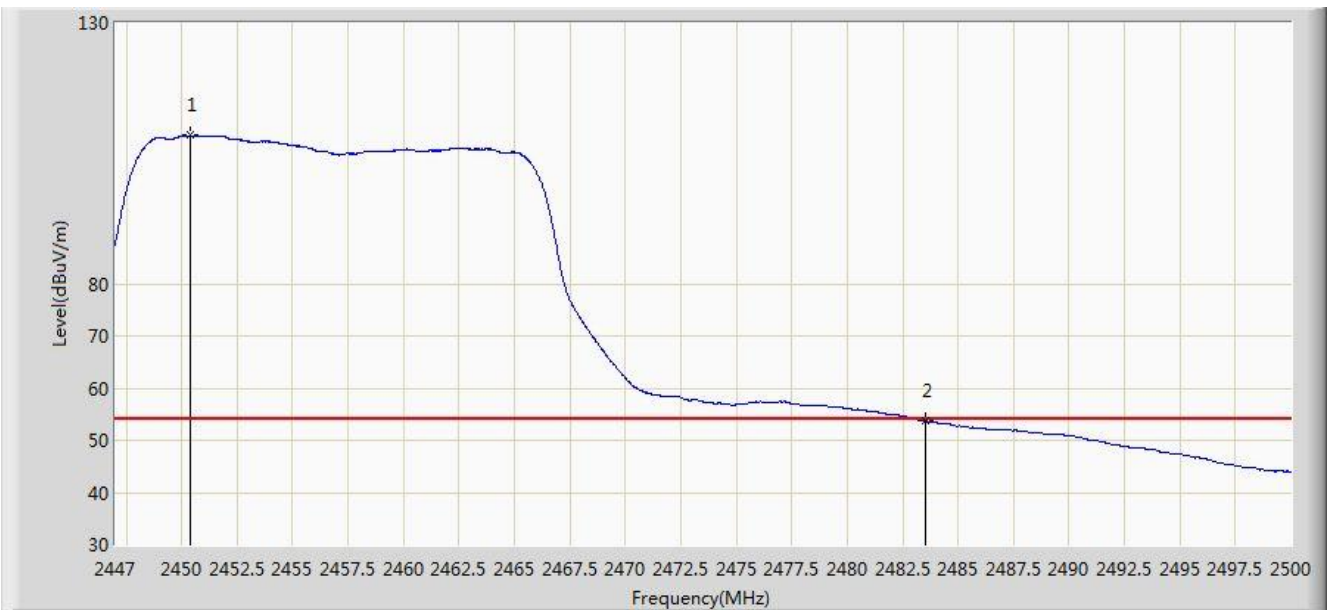


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2450.365	108.407	75.911	N/A	N/A	32.496	AV
2			2483.500	53.738	21.157	-0.262	54.000	32.580	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 23:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz	

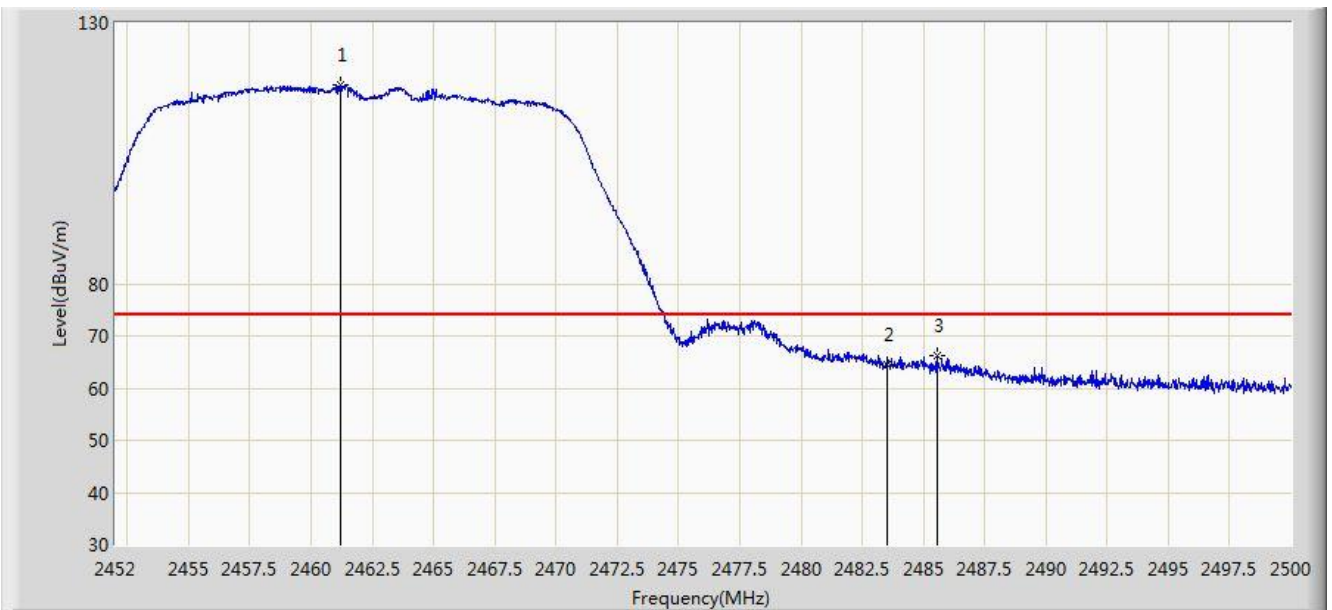


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.216	118.037	85.522	N/A	N/A	32.515	PK
2			2483.500	64.447	31.866	-9.553	74.000	32.580	PK
3			2485.576	66.197	33.610	-7.803	74.000	32.587	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 23:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz	

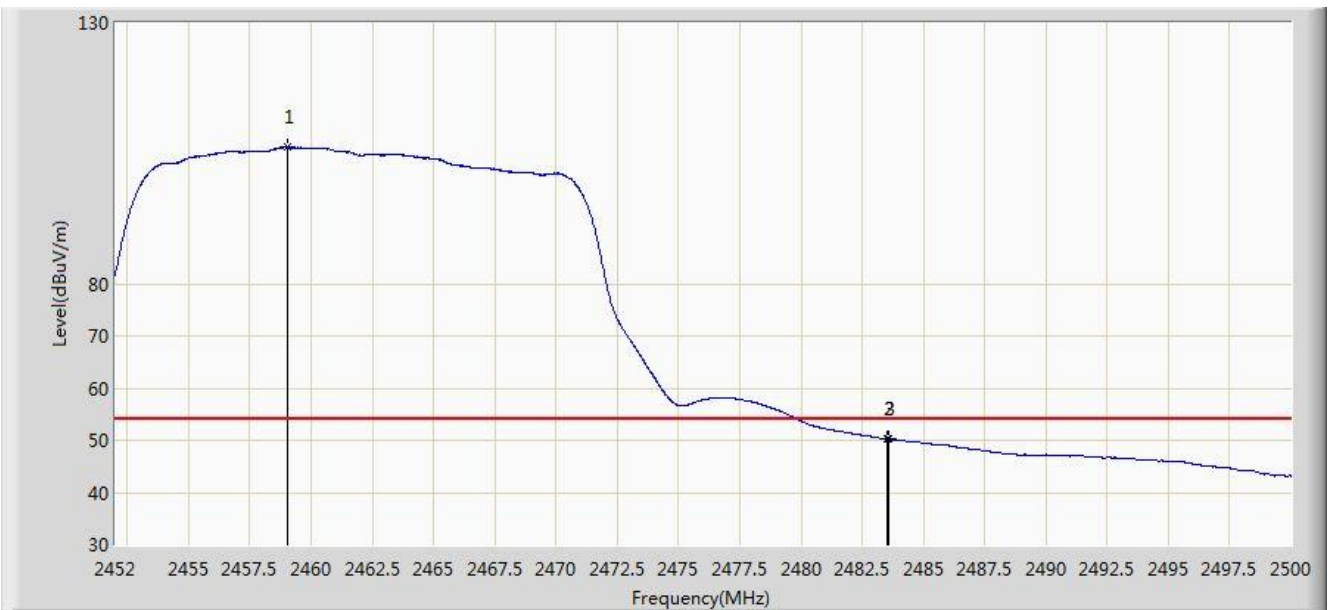


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2459.032	106.161	73.650	N/A	N/A	32.511	AV
2			2483.500	50.246	17.665	-3.754	54.000	32.580	AV
3			2483.560	50.247	17.666	-3.753	54.000	32.580	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 23:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz	

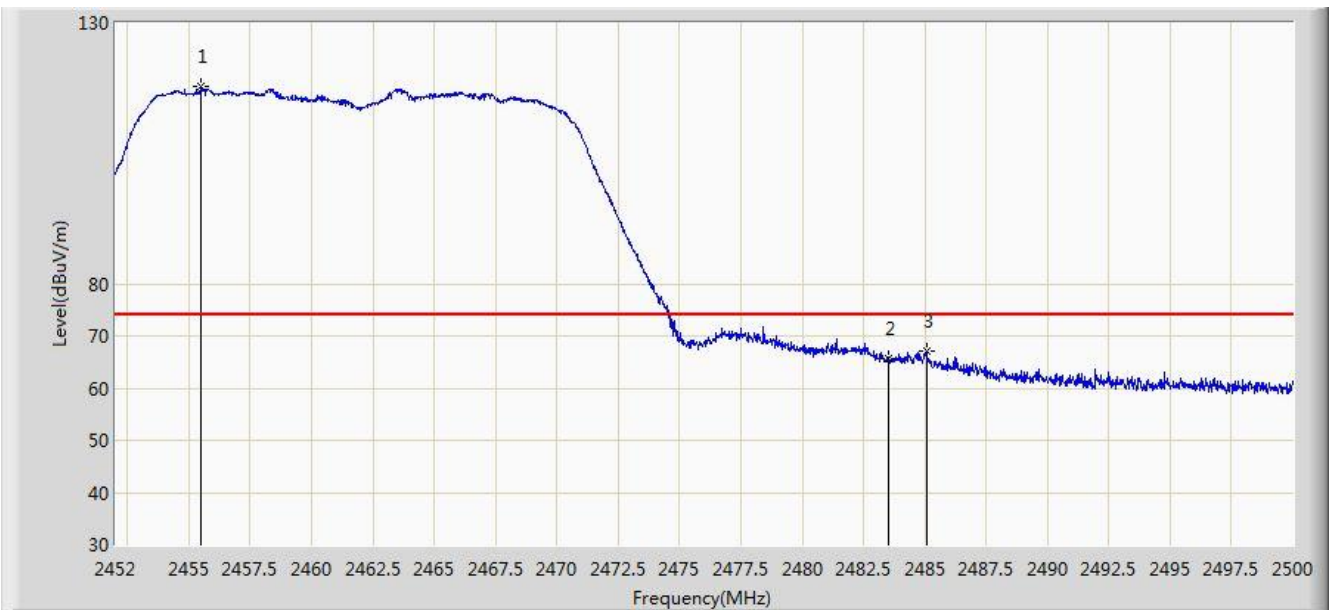


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.504	117.859	85.354	N/A	N/A	32.505	PK
2			2483.500	65.548	32.967	-8.452	74.000	32.580	PK
3			2485.072	67.047	34.462	-6.953	74.000	32.585	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 23:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz	

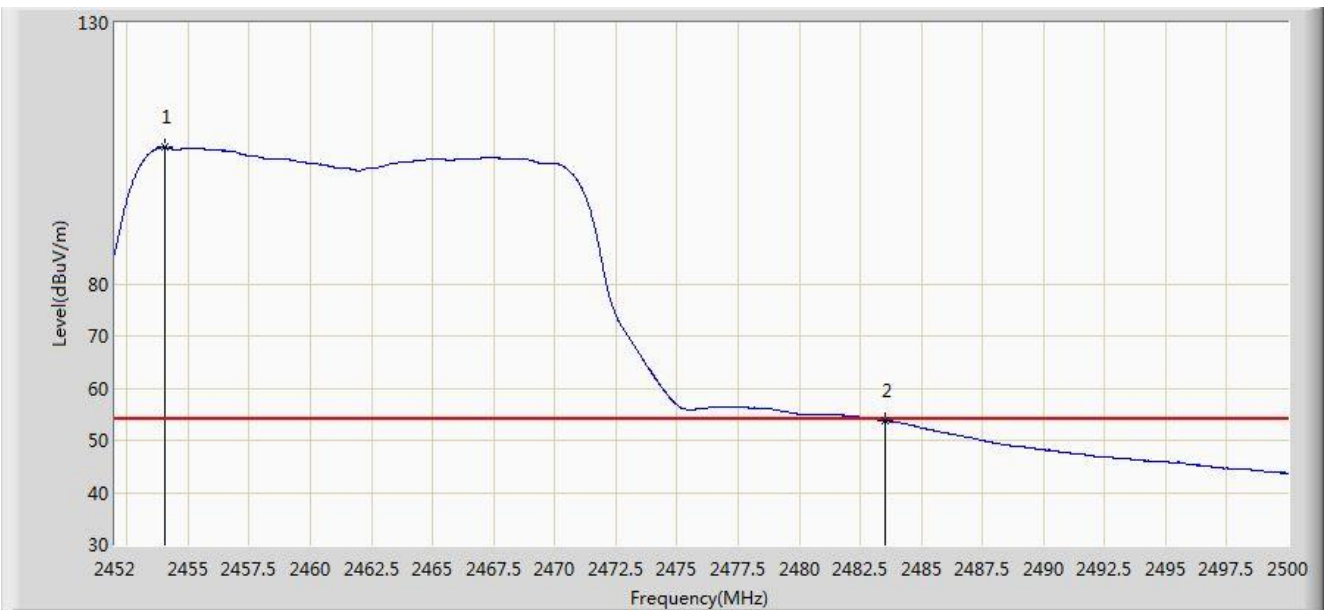


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2454.016	106.173	73.671	N/A	N/A	32.502	AV
2			2483.500	53.743	21.162	-0.257	54.000	32.580	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 23:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz	

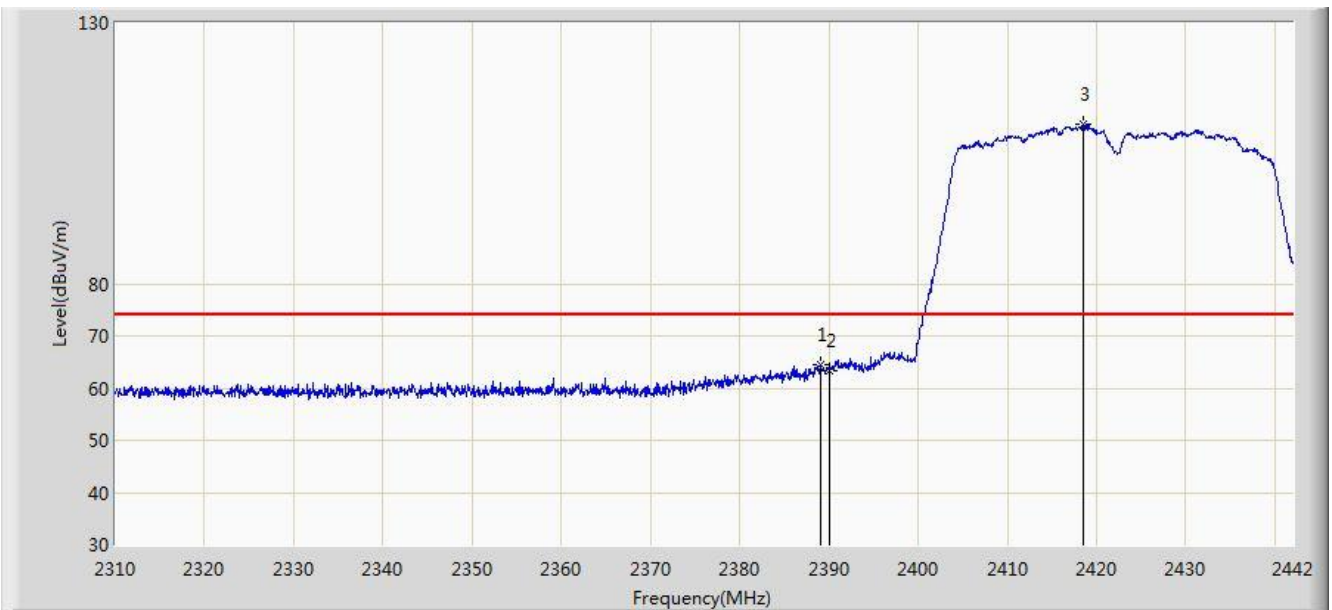


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.002	64.563	32.007	-9.437	74.000	32.556	PK
2			2390.000	63.318	30.764	-10.682	74.000	32.554	PK
3		*	2418.438	110.570	78.052	N/A	N/A	32.518	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 23:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz	

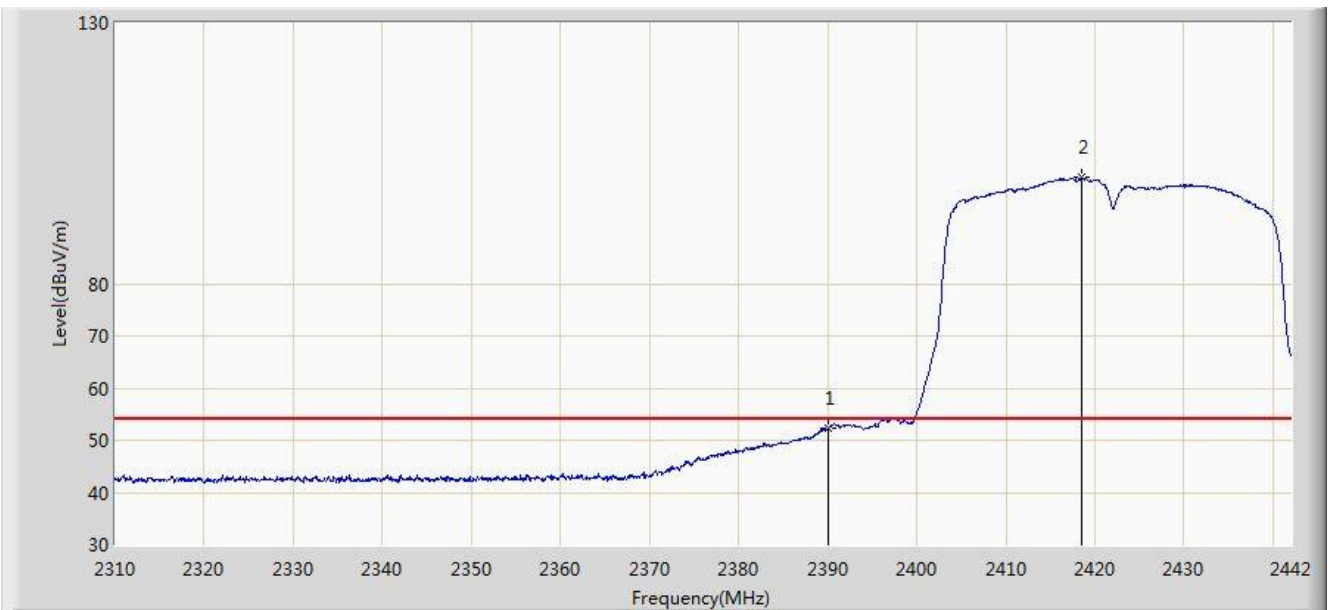


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.213	19.659	-1.787	54.000	32.554	AV
2		*	2418.438	100.299	67.781	N/A	N/A	32.518	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 23:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz	

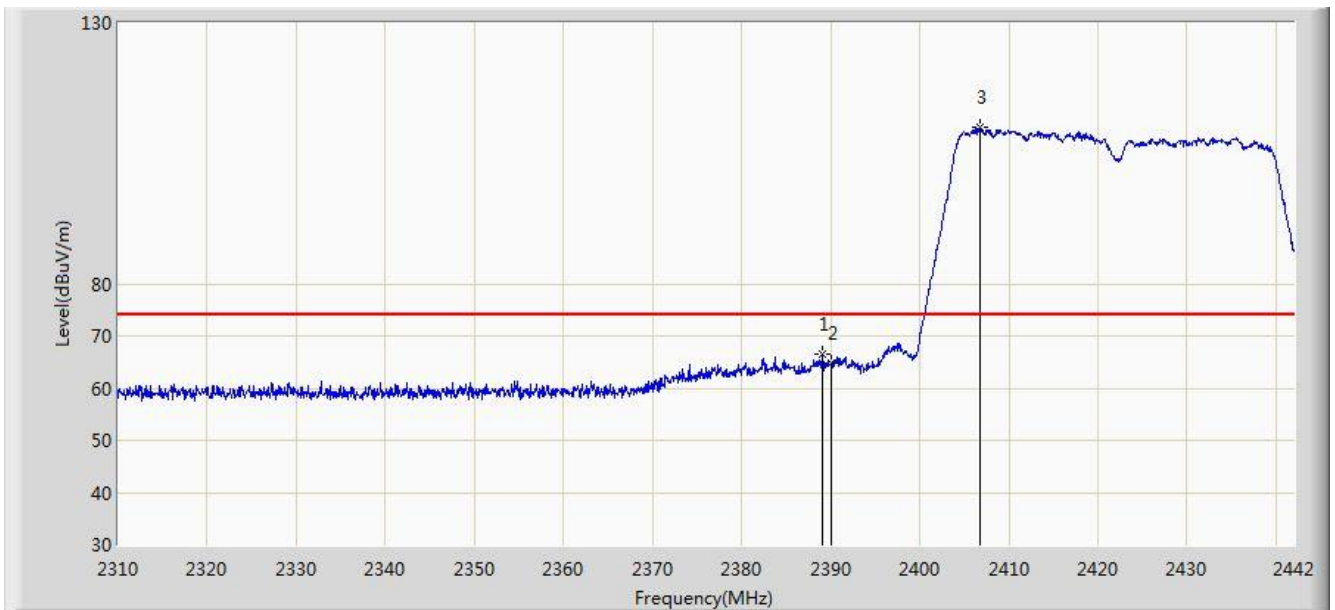


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.002	66.494	33.938	-7.506	74.000	32.556	PK
2			2390.000	64.735	32.181	-9.265	74.000	32.554	PK
3		*	2406.690	109.869	77.337	N/A	N/A	32.533	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/20 - 23:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz	

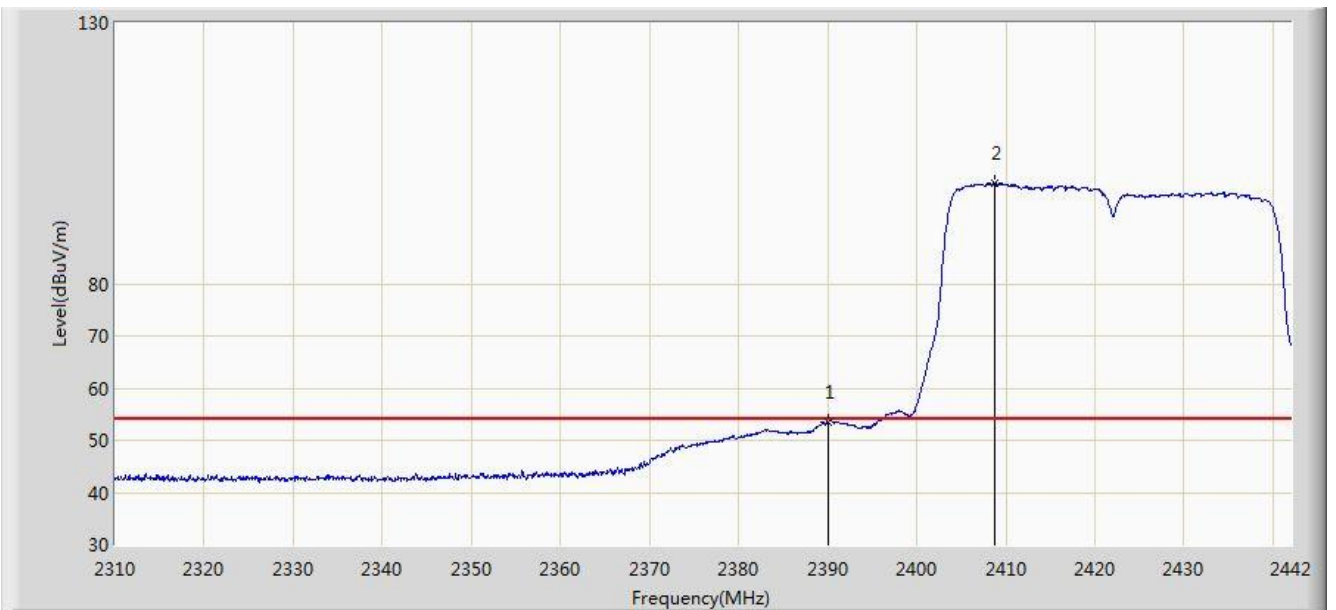


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.451	20.897	-0.549	54.000	32.554	AV
2		*	2408.736	99.176	66.646	N/A	N/A	32.530	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/21 - 00:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2427MHz	

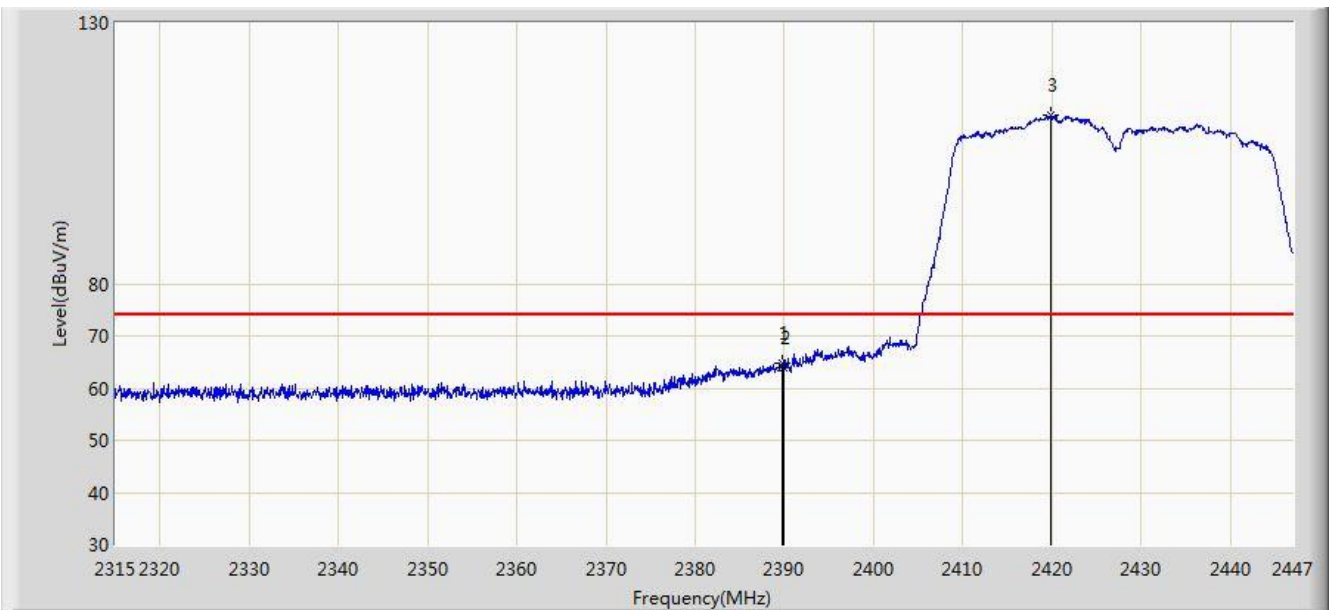


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.712	64.886	32.331	-9.114	74.000	32.555	PK
2			2390.000	64.030	31.476	-9.970	74.000	32.554	PK
3		*	2419.874	112.278	79.762	N/A	N/A	32.517	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/21 - 00:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2427MHz	

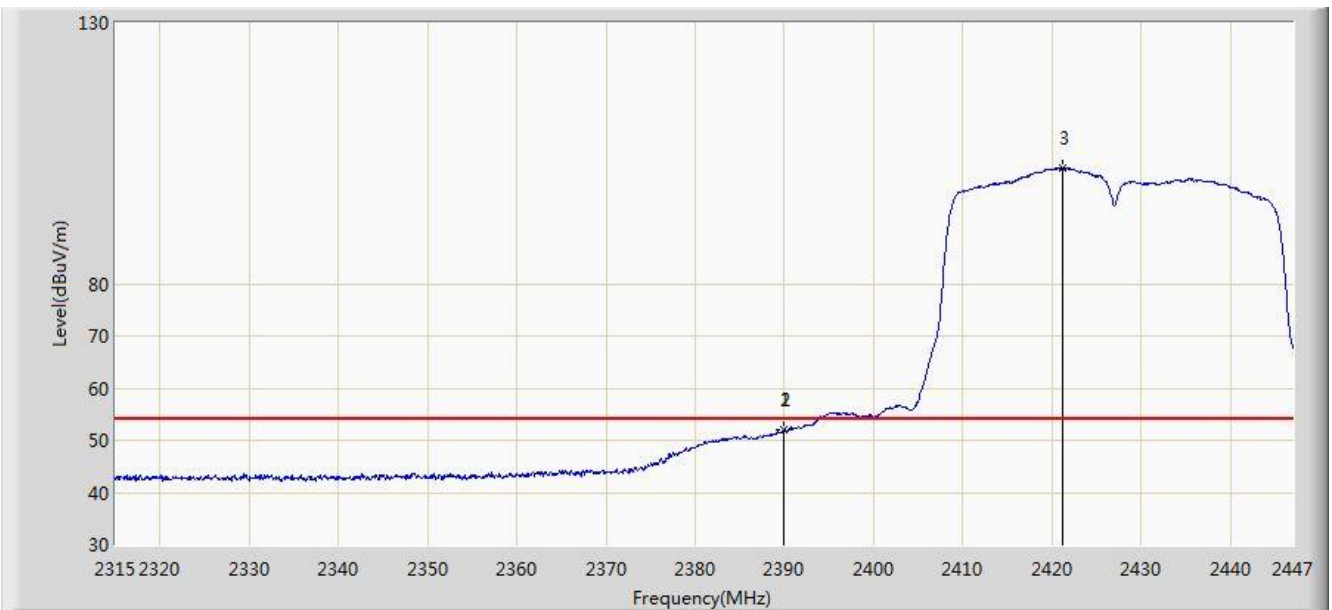


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.976	51.948	19.394	-2.052	54.000	32.554	AV
2			2390.000	51.912	19.358	-2.088	54.000	32.554	AV
3		*	2421.128	102.183	69.668	N/A	N/A	32.515	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/21 - 00:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2427MHz	

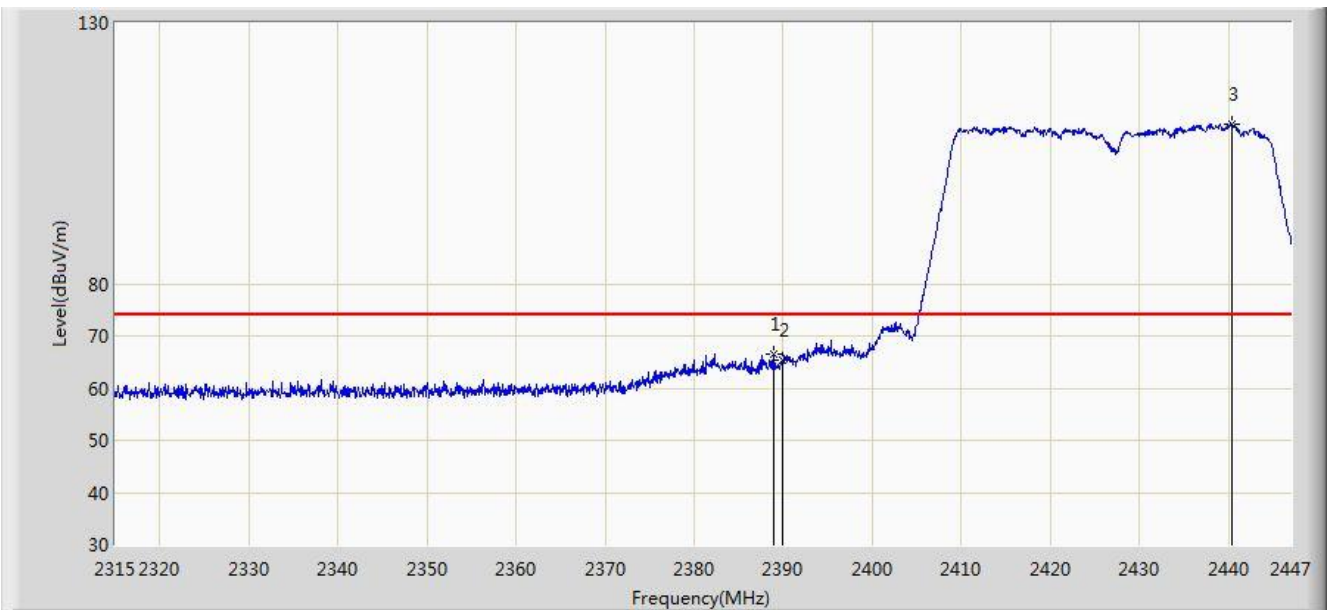


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.920	66.568	34.012	-7.432	74.000	32.556	PK
2			2390.000	65.256	32.702	-8.744	74.000	32.554	PK
3		*	2440.334	110.692	78.200	N/A	N/A	32.492	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/21 - 00:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2427MHz	

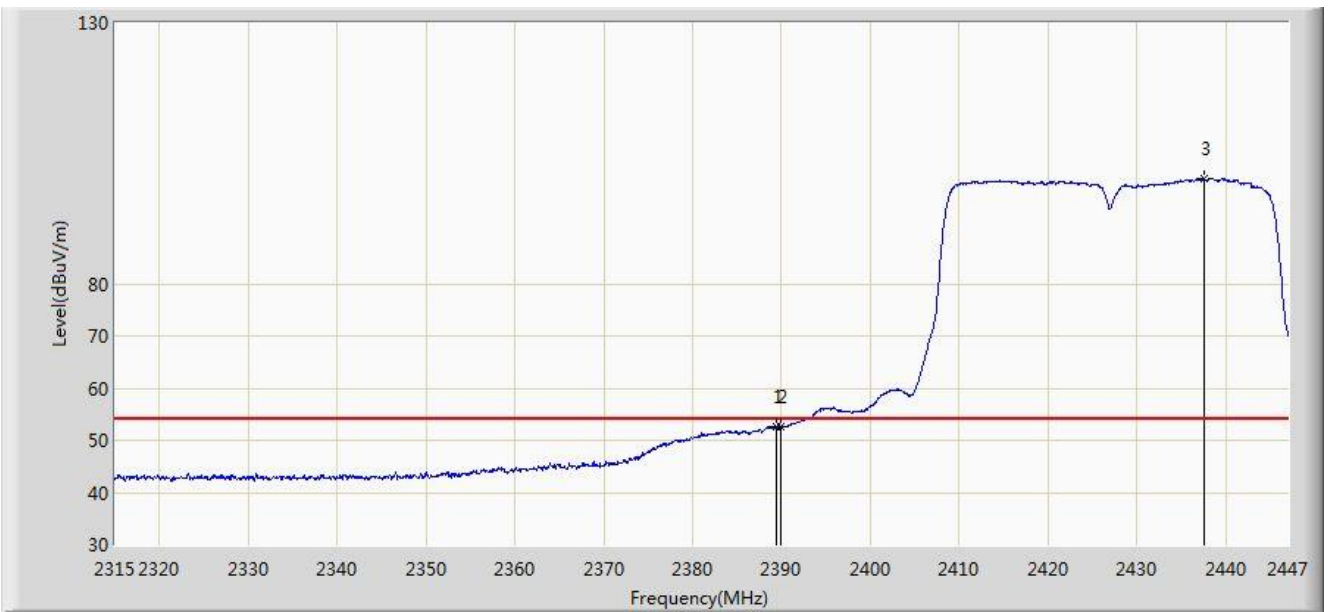


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.382	52.631	20.076	-1.369	54.000	32.555	AV
2			2390.000	52.611	20.057	-1.389	54.000	32.554	AV
3		*	2437.562	100.209	67.714	N/A	N/A	32.495	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/21 - 00:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz	

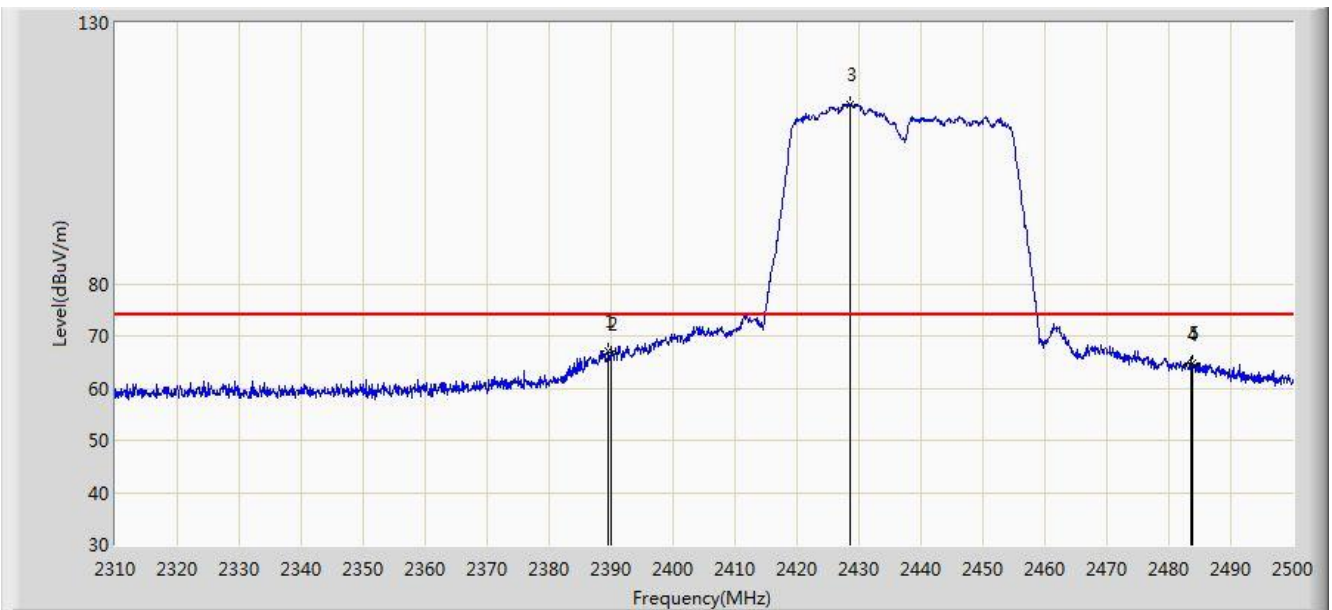


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.610	67.196	34.641	-6.804	74.000	32.555	PK
2			2390.000	66.422	33.868	-7.578	74.000	32.554	PK
3		*	2428.560	114.385	81.879	N/A	N/A	32.506	PK
4			2483.500	64.498	31.917	-9.502	74.000	32.580	PK
5			2483.850	64.649	32.067	-9.351	74.000	32.582	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/21 - 00:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz	

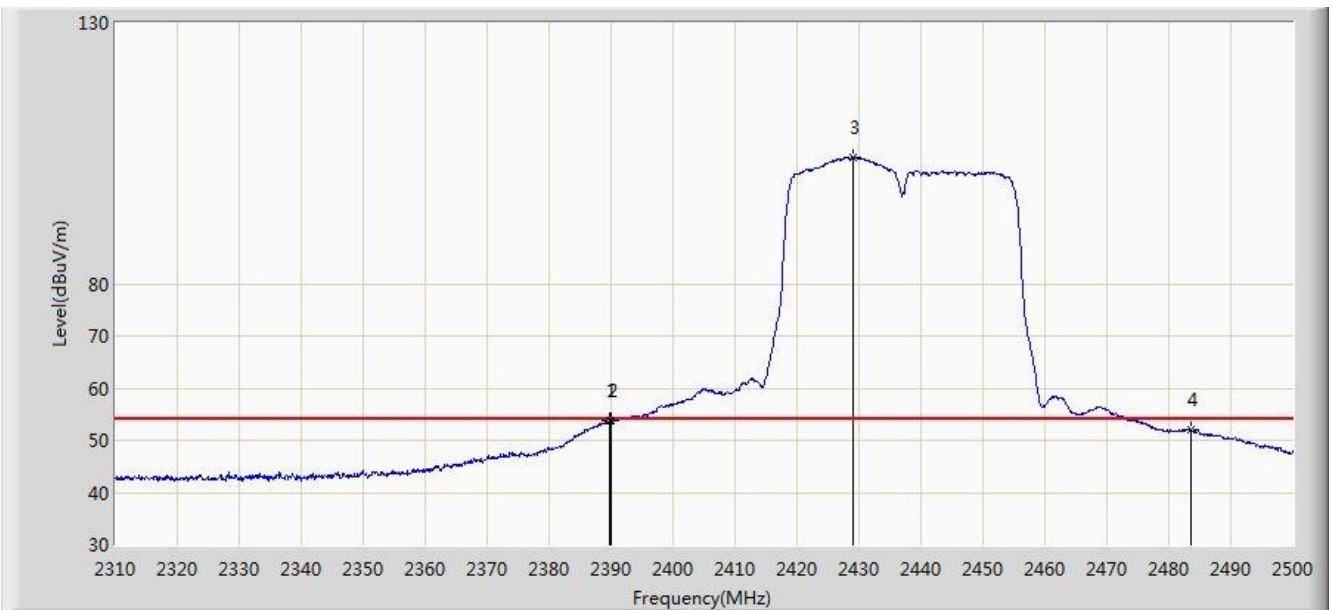


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.705	53.827	21.272	-0.173	54.000	32.555	AV
2			2390.000	53.637	21.083	-0.363	54.000	32.554	AV
3		*	2429.130	104.226	71.721	N/A	N/A	32.505	AV
4			2483.500	52.043	19.462	-1.957	54.000	32.580	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/21 - 00:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz	

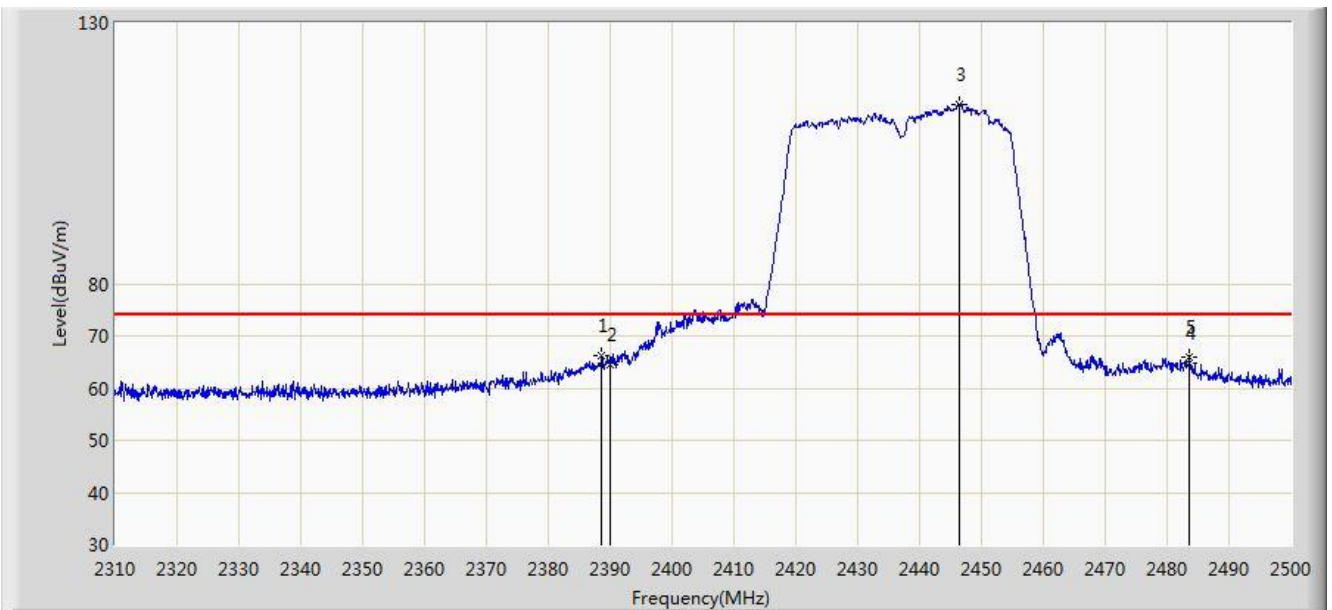


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.660	66.168	33.612	-7.832	74.000	32.556	PK
2			2390.000	64.398	31.844	-9.602	74.000	32.554	PK
3		*	2446.325	114.381	81.892	N/A	N/A	32.489	PK
4			2483.500	64.926	32.345	-9.074	74.000	32.580	PK
5			2483.565	65.936	33.355	-8.064	74.000	32.580	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/21 - 00:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz	

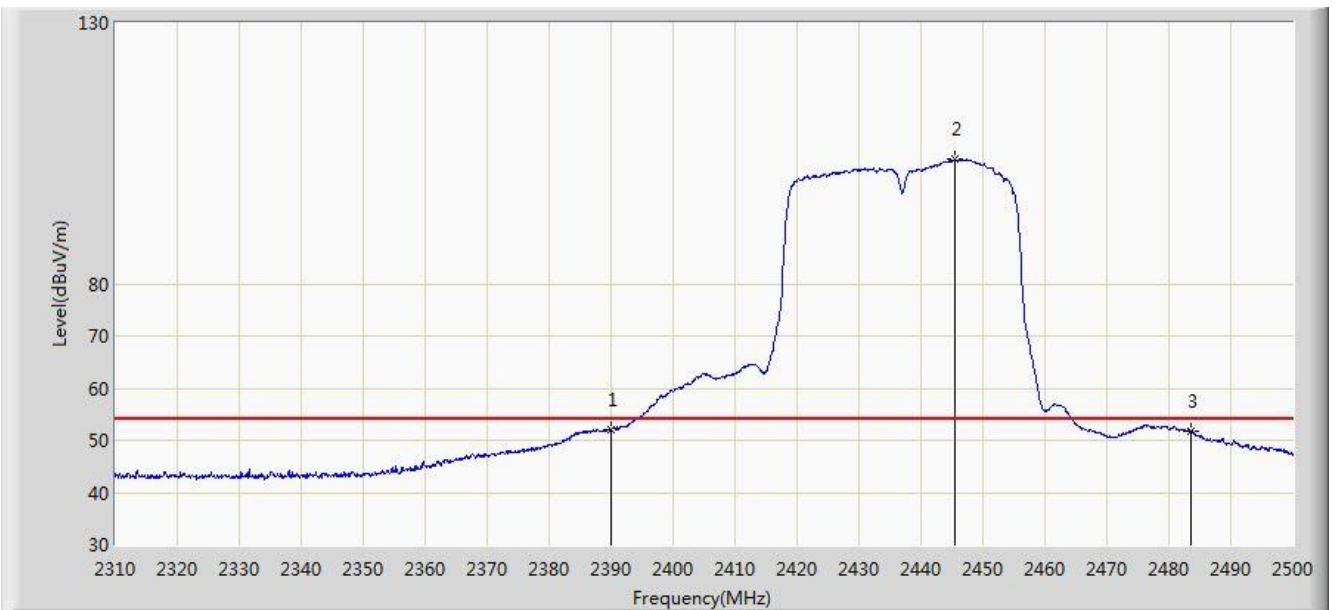


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.045	19.491	-1.955	54.000	32.554	AV
2		*	2445.375	103.840	71.353	N/A	N/A	32.487	AV
3			2483.500	51.852	19.271	-2.148	54.000	32.580	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/21 - 01:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2447MHz	

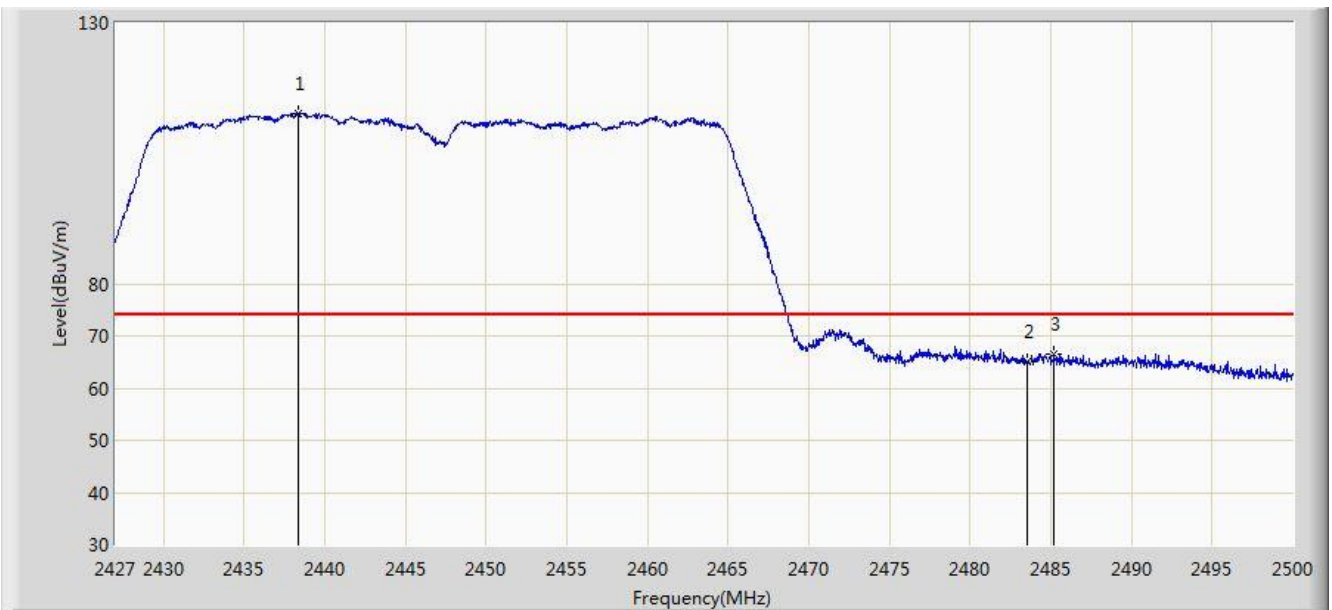


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2438.352	112.740	80.246	N/A	N/A	32.494	PK
2			2483.500	65.001	32.420	-8.999	74.000	32.580	PK
3			2485.181	66.580	33.994	-7.420	74.000	32.585	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/21 - 01:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2447MHz	

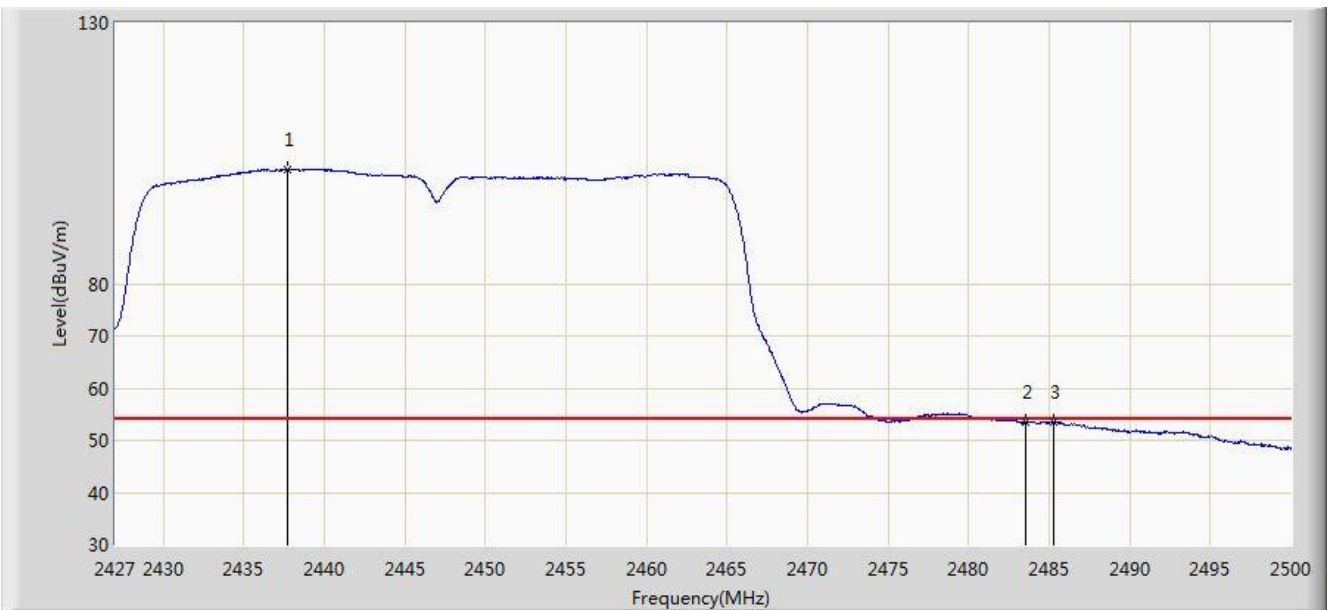


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2437.731	102.019	69.524	N/A	N/A	32.495	AV
2			2483.500	53.457	20.876	-0.543	54.000	32.580	AV
3			2485.254	53.559	20.973	-0.441	54.000	32.585	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/21 - 01:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2447MHz	

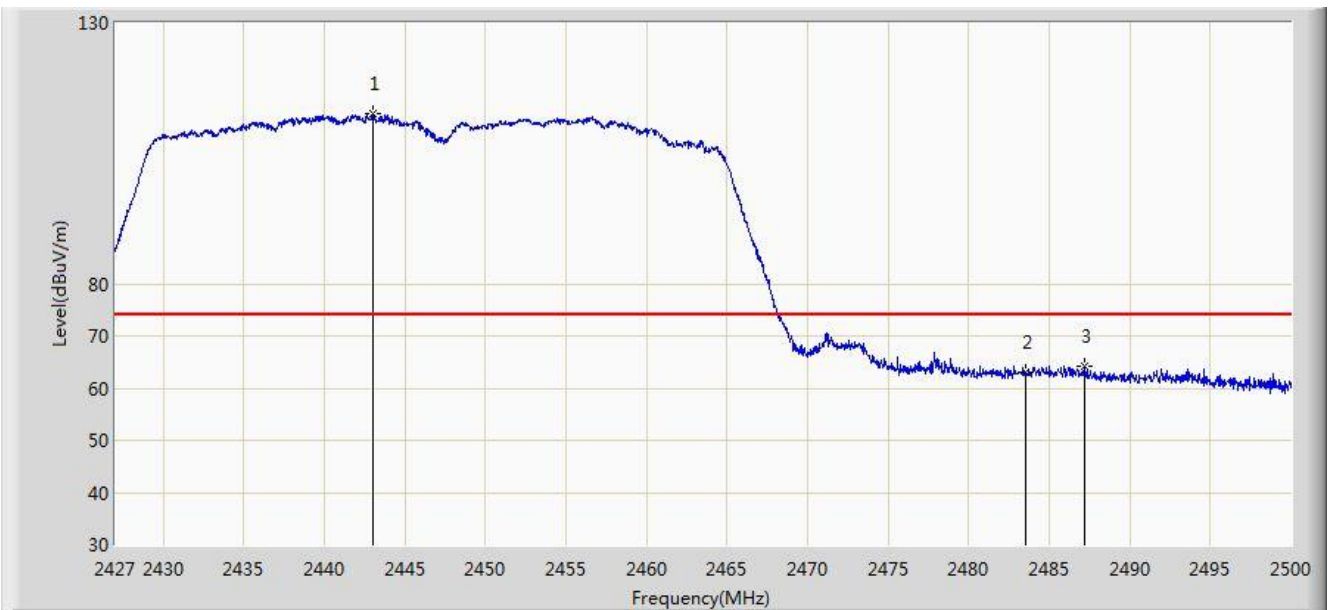


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2442.987	112.503	80.014	N/A	N/A	32.489	PK
2			2483.500	63.166	30.585	-10.834	74.000	32.580	PK
3			2487.152	64.171	31.579	-9.829	74.000	32.592	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/21 - 01:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2447MHz	

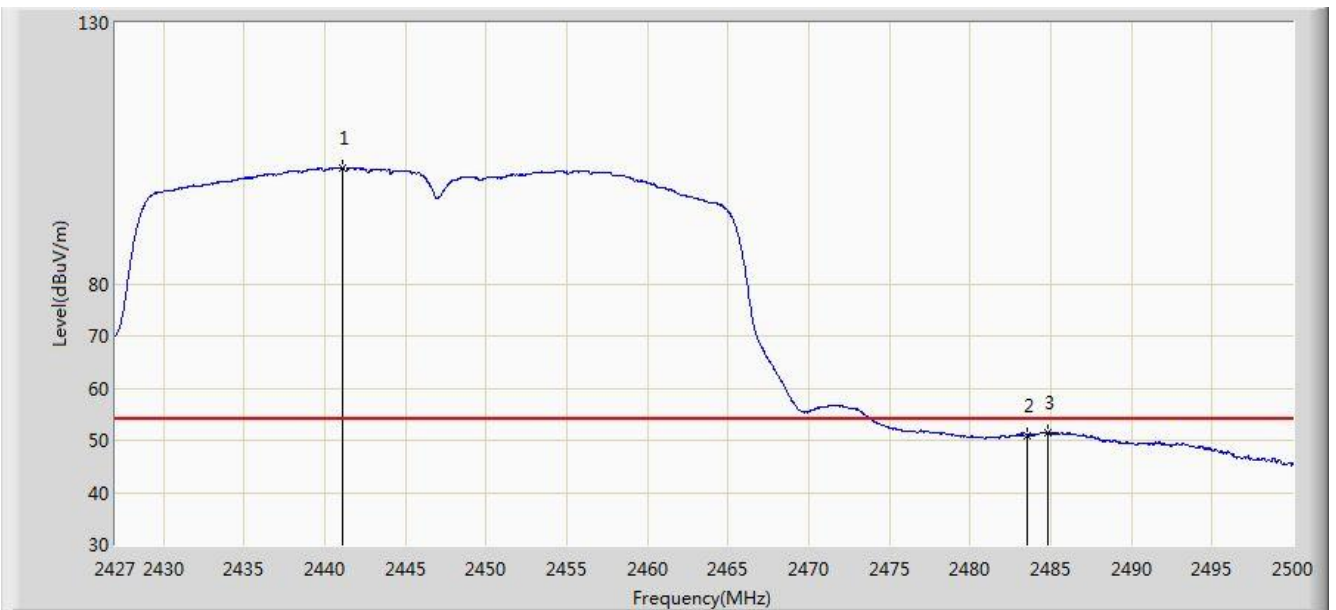


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2441.125	102.299	69.808	N/A	N/A	32.491	AV
2			2483.500	50.956	18.375	-3.044	54.000	32.580	AV
3			2484.816	51.489	18.904	-2.511	54.000	32.585	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/21 - 00:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz	

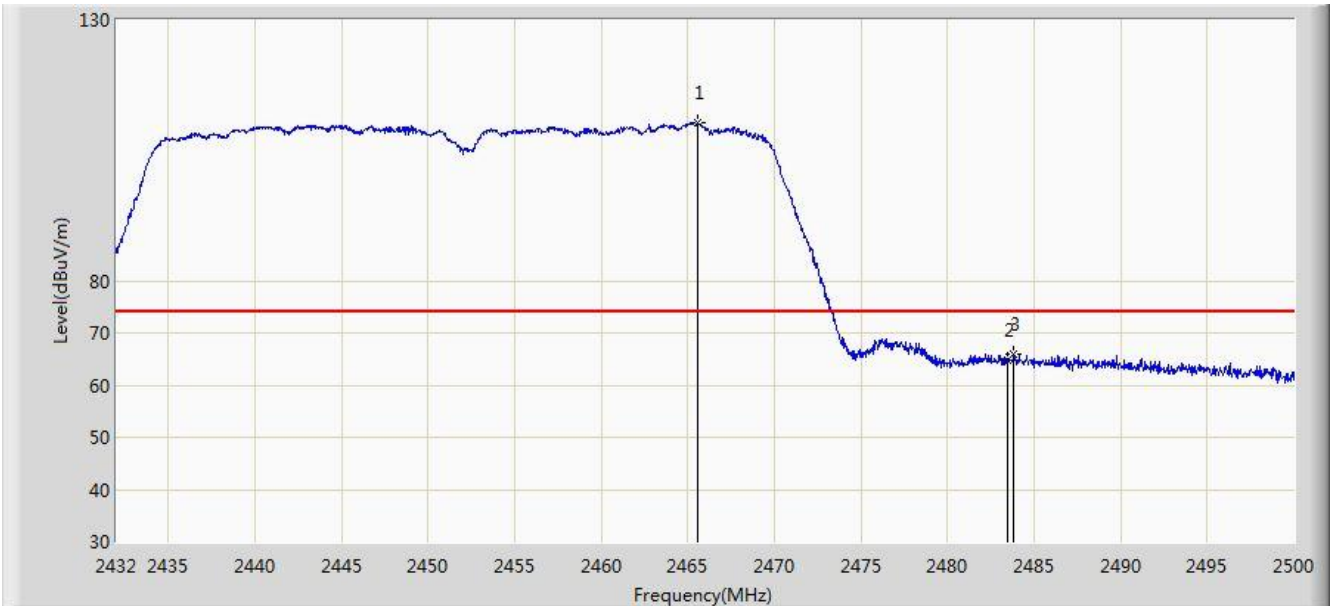


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2465.558	110.254	77.727	N/A	N/A	32.526	PK
2			2483.500	64.866	32.285	-9.134	74.000	32.580	PK
3			2483.850	65.939	33.357	-8.061	74.000	32.582	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/21 - 00:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz	

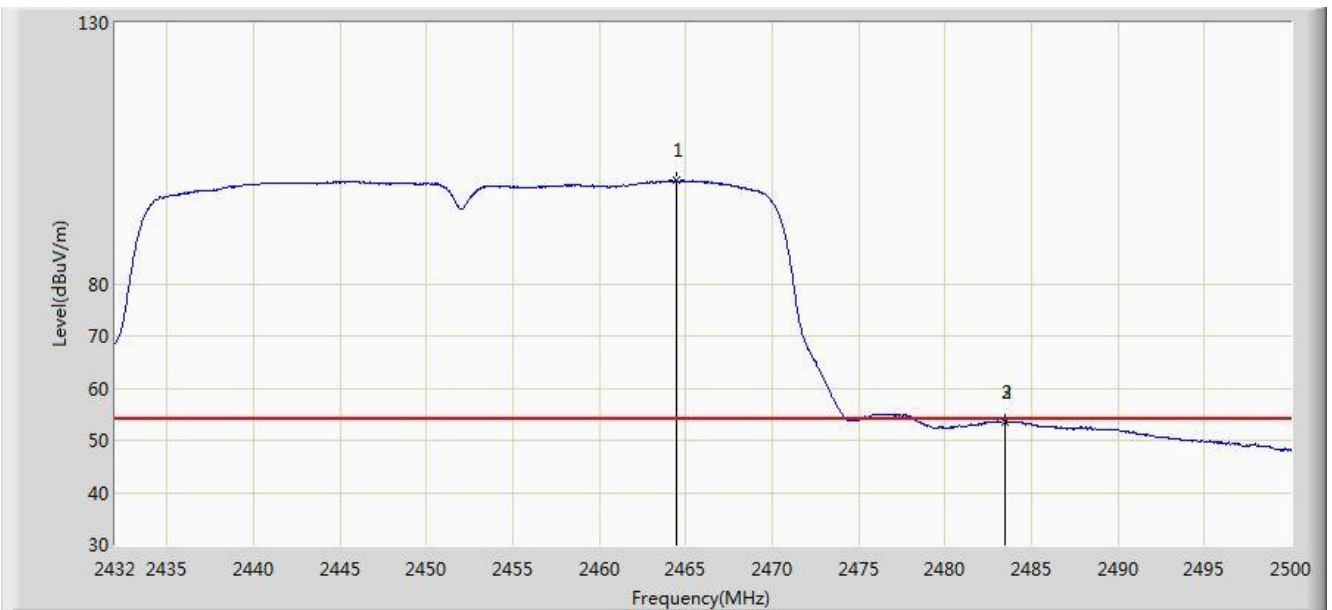

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.436	99.738	67.215	N/A	N/A	32.523	AV
2			2483.500	53.604	21.023	-0.396	54.000	32.580	AV
3			2483.510	53.619	21.038	-0.381	54.000	32.580	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/21 - 00:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2443.458	111.086	78.598	N/A	N/A	32.488	PK
2			2483.500	62.265	29.684	-11.735	74.000	32.580	PK
3			2488.066	64.200	31.606	-9.800	74.000	32.595	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/21 - 00:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz	

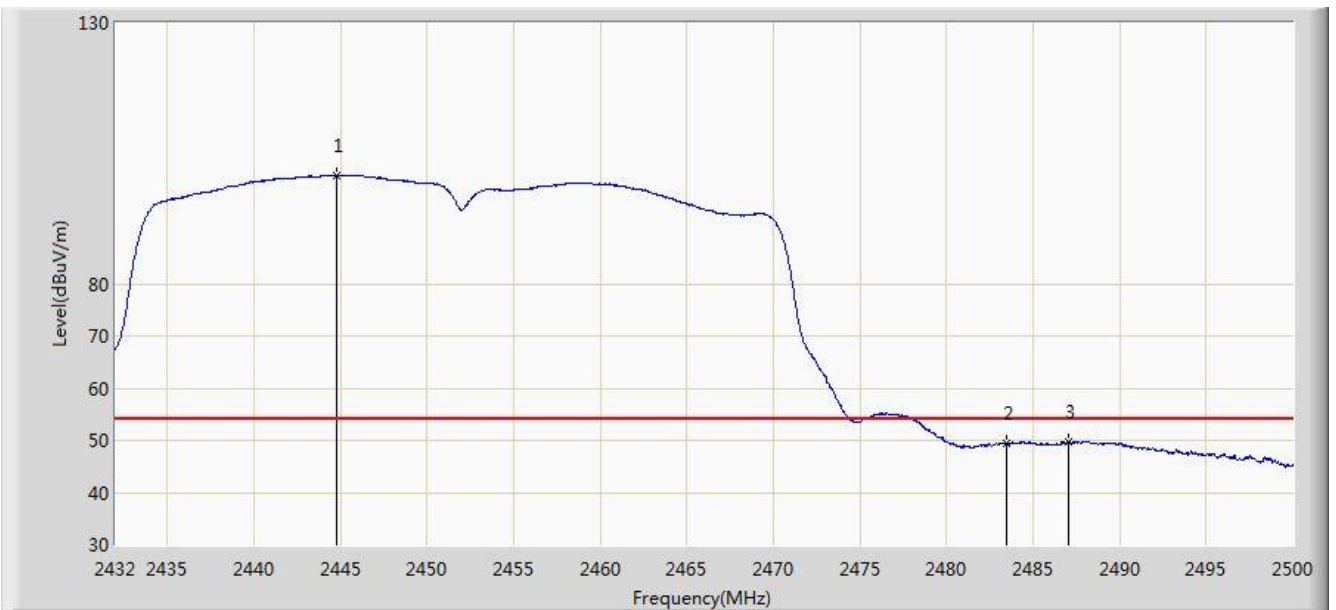

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2444.750	100.853	68.366	N/A	N/A	32.487	AV
2			2483.500	49.525	16.944	-4.475	54.000	32.580	AV
3			2487.012	49.829	17.238	-4.171	54.000	32.592	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

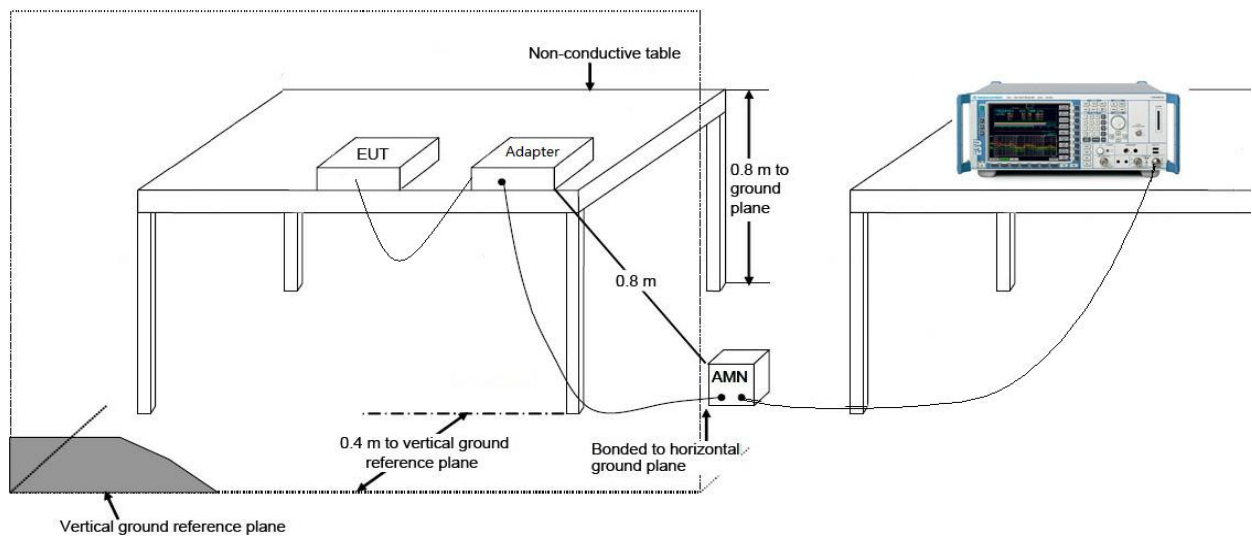

7.8.3. Test Result

Site: SR2	Time: 2018/06/24 - 18:18
Limit: FCC_Part15.207_CE_AC Power	Engineer: Kevin Ker
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: ACCESS POINT	Power: AC 120V/60Hz
Worse Case Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Ant 0 + 1	

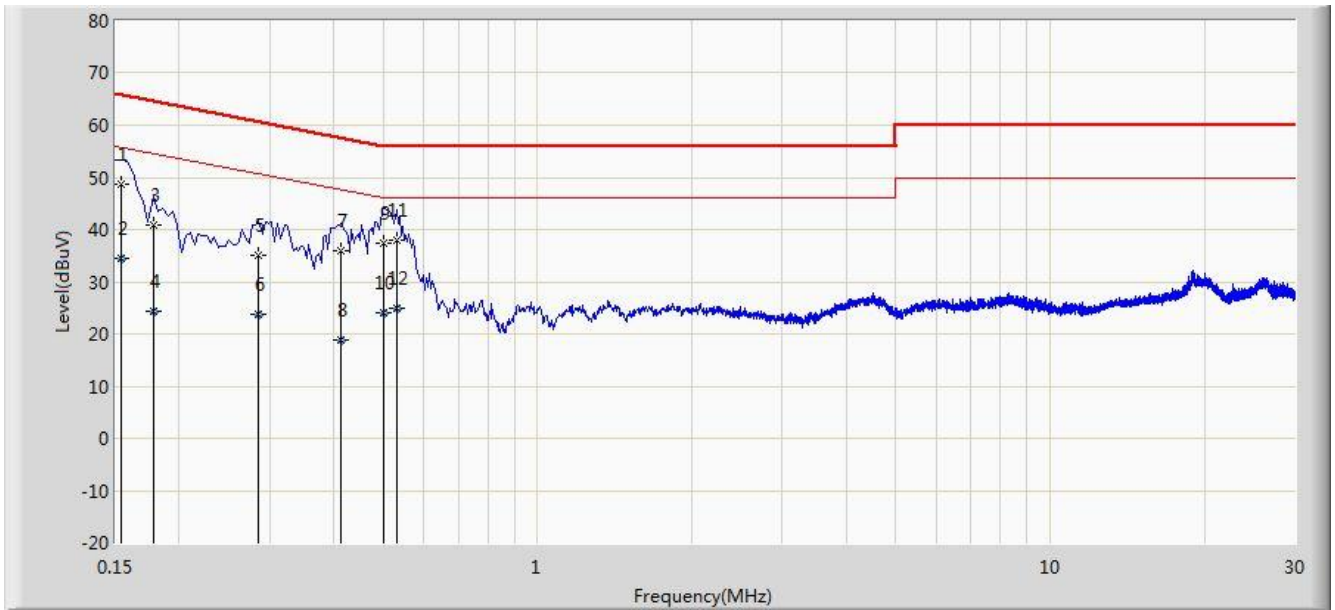


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.154	48.678	37.939	-17.103	65.781	10.740	QP
2			0.154	34.399	23.659	-21.382	55.781	10.740	AV
3			0.178	40.891	30.833	-23.688	64.578	10.058	QP
4			0.178	24.208	14.150	-30.371	54.578	10.058	AV
5			0.286	35.084	25.092	-25.555	60.640	9.993	QP
6			0.286	23.742	13.749	-26.897	50.640	9.993	AV
7			0.414	35.891	25.794	-21.677	57.568	10.097	QP
8			0.414	18.903	8.806	-28.665	47.568	10.097	AV
9			0.502	37.467	27.310	-18.533	56.000	10.157	QP
10			0.502	24.127	13.970	-21.873	46.000	10.157	AV
11			0.530	38.005	27.854	-17.995	56.000	10.151	QP
12			0.530	25.048	14.897	-20.952	46.000	10.151	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SR2	Time: 2018/06/24 - 18:26
Limit: FCC_Part15.207_CE_AC Power	Engineer: Kevin Ker
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: ACCESS POINT	Power: AC 120V/60Hz
Worse Case Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Ant 0 + 1	

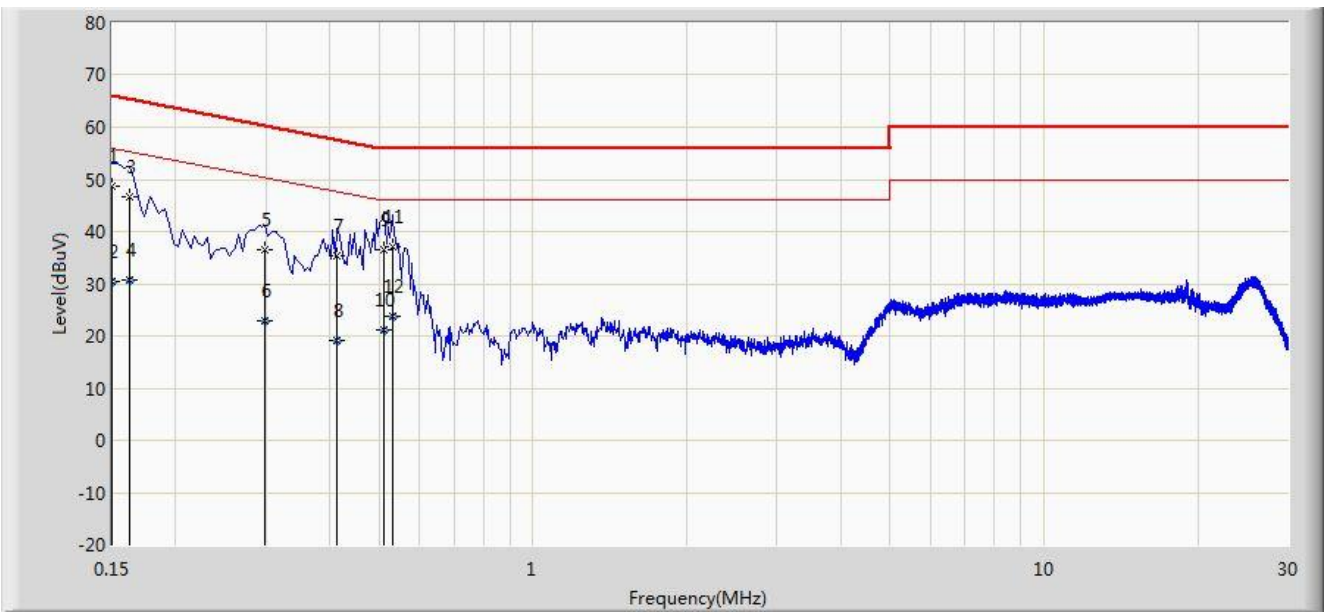

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.150	48.805	37.663	-17.195	66.000	11.142	QP
2			0.150	30.391	19.249	-25.609	56.000	11.142	AV
3			0.162	46.765	36.687	-18.596	65.361	10.078	QP
4			0.162	30.681	20.602	-24.680	55.361	10.078	AV
5			0.298	36.651	26.615	-23.647	60.298	10.036	QP
6			0.298	22.955	12.919	-27.343	50.298	10.036	AV
7			0.414	35.323	25.200	-22.245	57.568	10.123	QP
8			0.414	19.272	9.149	-28.296	47.568	10.123	AV
9			0.510	36.409	26.233	-19.591	56.000	10.176	QP
10			0.510	21.134	10.958	-24.866	46.000	10.176	AV
11			0.530	37.179	27.009	-18.821	56.000	10.169	QP
12			0.530	23.885	13.715	-22.115	46.000	10.169	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **ACCESS POINT FCC ID: Q9DAPEX037457** is in compliance with Part 15C of the FCC Rules.

_____ The End _____