

MEASUREMENT REPORT

FCC PART 15 Subpart C WLAN 802.11b/g/n/ax



FCC ID: Q9DAPEX057457

APPLICANT: Hewlett Packard Enterprise Company

Application Type: Certification

Product: ACCESS POINT

Model No.: APEX0574, APEX0575, APEX0577


Brand Name:  

FCC Classification: Digital Transmission System (DTS)


FCC Rule Part(s): Part15 Subpart C (Section 15.247)

Test Procedure(s): ANSI C63.10-2013, KDB 662911 D01v02r01

Test Date: December 25, 2019 ~ March 31, 2020

Reviewed By: 

(Paddy Chen)

Approved By: 

(Chenz Ker)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2003TW0002-U3	Rev. 01	Initial report	04-20-2020	Valid

CONTENTS

Description	Page
General Information.....	5
1. INTRODUCTION.....	6
1.1. Scope.....	6
1.2. MRT Test Location	6
2. PRODUCT INFORMATION.....	7
2.1. Feature of Equipment under Test.....	7
2.2. Product Specification Subjective to this Report	7
2.3. Working Frequencies for this report.....	8
2.4. Description of Available Antennas.....	9
2.5. Description of Antenna RF Port.....	11
2.6. Test Mode	11
2.7. Duty Cycle.....	12
2.8. Description of Test Software.....	14
2.9. EMI Suppression Device(s)/Modifications.....	14
2.10. Labeling Requirements.....	14
3. DESCRIPTION of TEST.....	15
3.1. Measurement Procedure	15
3.2. AC Line Conducted Emissions	15
3.3. Radiated Emissions.....	16
4. ANTENNA REQUIREMENTS.....	17
5. TEST EQUIPMENT CALIBRATION DATE.....	18
6. MEASUREMENT UNCERTAINTY	19
7. TEST RESULT	20
7.1. Summary.....	20
7.2. 6dB Bandwidth Measurement.....	21
7.2.1. Test Limit	21
7.2.2. Test Procedure used.....	21
7.2.3. Test Setting.....	21
7.2.4. Test Setup	21
7.2.5. Test Result.....	22
7.3. Output Power Measurement.....	29
7.3.1. Test Limit	29
7.3.2. Test Procedure Used	29

7.3.3.	Test Setting.....	29
7.3.4.	Test Setup	29
7.3.5.	Test Result of Output Power	30
7.4.	Power Spectral Density Measurement.....	37
7.4.1.	Test Limit	37
7.4.2.	Test Procedure Used	37
7.4.3.	Test Setting.....	37
7.4.4.	Test Setup	38
7.4.5.	Test Result.....	39
7.5.	Conducted Band Edge and Out-of-Band Emissions	40
7.5.1.	Test Limit	40
7.5.2.	Test Procedure Used	40
7.5.3.	Test Setting.....	40
7.5.4.	Test Setup	41
7.5.5.	Test Result.....	42
7.6.	Radiated Spurious Emission Measurement	55
7.6.1.	Test Limit	55
7.6.2.	Test Procedure Used	55
7.6.3.	Test Setting.....	55
7.6.4.	Test Setup	57
7.6.5.	Test Result.....	58
7.7.	Radiated Restricted Band Edge Measurement.....	59
7.7.1.	Test Limit	59
7.7.2.	Test Procedure Used	60
7.7.3.	Test Setting.....	60
7.7.4.	Test Setup	61
7.7.5.	Test Result.....	62
7.8.	AC Conducted Emissions Measurement	63
7.8.1.	Test Limit	63
7.8.2.	Test Setup	63
7.8.3.	Test Result.....	64
8.	CONCLUSION	66
	Appendix A - Test Setup Photograph	67
	Appendix B - EUT Photograph.....	68

General Information

Applicant:	Hewlett Packard Enterprise Company
Applicant Address:	3333 Scott Blvd, Santa Clara, CA 94089, USA
Manufacturer:	Hewlett Packard Enterprise Company
Manufacturer Address:	3333 Scott Blvd, Santa Clara, CA 94089, USA
Test Site:	MRT Technology (Taiwan) Co., Ltd
Test Site Address:	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
Test Device Serial No.:	APEX0574 Radiated sample S/N: DE201600CC, Conducted sample S/N: DE29A00066
	APEX0575 Radiated sample S/N: DE29A0078, Radiated sample S/N: DE29A0078
	APEX0577 Radiated sample S/N: DE29A00079, Conducted sample S/N: DE29A0002D

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Fuxing Rd., Taoyuan, Taiwan (R.O.C)

- MRT facility is a FCC registered (Reg. No. 291082 and 153292) test facility with the site description report on file and is designated by the FCC as an Accredited Test Film.
- MRT facility is an IC registered (MRT Reg. No. 21723-1) test laboratory with the site description on file at Industry Canada.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (TAF) under the American Association for Laboratory Accreditation Program (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC, Industry Taiwan, EU and TELEC Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada and Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

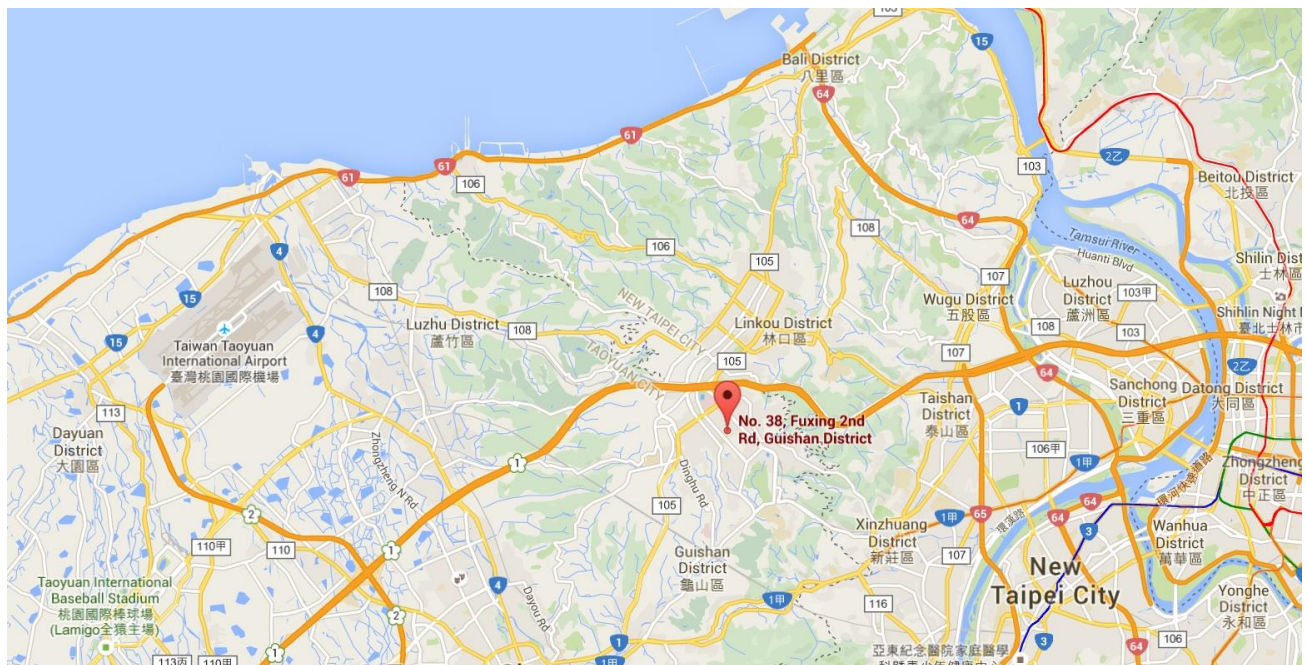

2. PRODUCT INFORMATION

2.1. Feature of Equipment under Test

Product Name	ACCESS POINT
Model No.	APEX0574, APEX0575, APEX0577
Wi-Fi Specification	802.11a/b/g/n/ac/ax
Bluetooth Specification	v4.2 single mode
Zigbee Specification	802.15.4
Software Version	F.1.01
Operating Temperature	-40 ~ 65 °C
Power Type	POE input
Operating Environment	Outdoor Use

Note 1: The difference between three models is that EUT use different antenna and appearance, other hardware and software are the same. Each model has its own power parameter value.

Note 2: The applicant provided one PoE adapter (Manufacturer: MICROSEMI & Model: 9001GO) for approval testing, it is not for sale.

2.2. Product Specification Subjective to this Report

Frequency Range	802.11b/g/n-HT20/ax-HE20: 2412 ~ 2462MHz 802.11n-HT40/ax-HE40: 2422 ~ 2452MHz
Channel Number	802.11b/g/n-HT20/ax-HE20: 11 802.11n-HT40/ax-HE40: 7
Type of Modulation	802.11b: DSSS 802.11g/n: OFDM 802.11ax: OFDMA
Data Rate	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps 802.11ax: up to 574Mbps

Note 1: For other features of this EUT, test report will be issued separately.

Note 2: The 802.11ax mode does not support partial RU configurations.

2.3. Working Frequencies for this report

802.11b/g/n-HT20/ax-HE20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

802.11n-HT40/ax-HE40

Channel	Frequency	Channel	Frequency	Channel	Frequency
03	2422 MHz	04	2427 MHz	05	2432 MHz
06	2437 MHz	07	2442 MHz	08	2447 MHz
09	2452 MHz	--	--	--	--

2.4. Description of Available Antennas

Model No.: APEX0574

Antenna No.	Antenna Type	Frequency Band (GHz)	Model No.	Max Peak Gain (dBi)	30 Degree Ant Gain (dBi)	BF Dir Gain (dBi)	CDD Dir Gain (dBi)	
							For Power	For PSD
Wi-Fi External Antenna List (2.4GHz 2*2 MIMO, 5GHz 4*4 MIMO)								
1 (Note 3)	Omni	2.4	ANT-2x2-2005	5.0	N/A	5.0	5.0	5.0
2 (Note 3)	Omni	5	ANT-2x2-5005	5.0	0	8.01	5.0	8.01
3 (Note 3)	Omni	5	ANT-2x2-5010	10.0	0	13.01	10.0	13.01
4 (Note 3)	Directional	2.4	ANT-2x2-2314	14.0	N/A	14.0	14.0	14.0
5 (Note 3)	Directional	5	ANT-3x3-5712	11.5	1.5	14.51	11.5	14.51
6 (Note 3)	Directional	5	ANT-4x4-5314	14.0	6.0	17.01	14.0	17.01
7 (Note 3)	Directional	5	MT-484052/NVH	16.0	3.0	19.01	16.0	19.01
8 (Note 3)	Directional	2.4	ANT-3x3-D608	7.5	N/A	10.51	7.5	10.51
		5		7.5	4.5	10.51	7.5	10.51
9 (Note 3)	Directional	2.4	ANT-3x3-D100	5.0	N/A	8.01	5.0	8.01
		5		5.0	4.0	8.01	5.0	8.01
Bluetooth Internal Antenna								
PCB		2.4		4.2				

Model No.: APEX0577

Antenna Type	Frequency Band (GHz)	Max Peak Gain (dBi)	30 Degree Ant Gain (dBi)	BF Dir Gain (dBi)	CDD Dir Gain (dBi)	
					For Power	For PSD
Wi-Fi Internal Antenna List (2.4GHz 2*2 MIMO, 5GHz 4*4 MIMO)						
Directional (Note 3)	2.4	6.8	N/A	6.80	6.8	6.80
Directional (Note 3)	5	5.6	5.6	8.60	5.6	8.60
Bluetooth Internal Antenna						
PCB	2.4	8.4				

Model No.: APEX0575

Antenna Type	Frequency Band (GHz)	Max Peak Gain (dBi)	30 Degree Ant Gain (dBi)	BF Dir Gain (dBi)	CDD Dir Gain (dBi)	
					For Power	For PSD
Wi-Fi Internal Antenna List (2.4GHz 2*2 MIMO, 5GHz 4*4 MIMO)						
Omni (Note 3)	2.4	3.4	N/A	3.4	3.4	3.4
Omni (Note 3)	5	5.0	-2.7	8.0	5.0	8.0
Bluetooth Internal Antenna						
PCB	2.4	6.0				

Note:

- The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.
 For CDD transmissions, directional gain is calculated as follows, $N_{ANT} = 2$ or 4 , $N_{SS} = 1$.
 If all antennas have the same gain, G_{ANT} , Directional gain = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows.
 - For power spectral density (PSD) measurements on all devices,
 Array Gain = $10 \log (N_{ANT} / N_{SS})$ dB = 3.01;
 - For power measurements on IEEE 802.11 devices,
 Array Gain = 0 dB for $N_{ANT} \leq 4$;
 Abbreviation "Dir" means directional.
- The EUT also supports Beam Forming mode, and the Beam Forming support 802.11n/ac/ax, not include 802.11a/b/g.
 Directional gain = $G_{ANT} + \text{BF Gain}$, BF Gain was declared by the applicant.
- These antennas have Cross-Polarized design, only each two outputs driving a pair of antennas that are cross-polarized, the detail see the antenna specification.
- For APEX0574, low gain antenna (ANT-2x2-2005 & ANT-2x2-5005) was selected to perform all RF testing that can got maximum power setting, high gain different type antenna (ANT-2x2-5010 & ANT-2x2-2314 & MT-484052/NVH) was selected to perform radiated spurious emission and band edge testing. High gain antenna power setting will be reduced according to difference value of antenna gain declared by applicant.
- For APEX0577 and APEX0575, its directional gain was declared by the applicant, the detail refers to antenna specification.

2.5. Description of Antenna RF Port

Antenna RF Port						
--	2.4GHz RF Port		5GHz RF Port			
Software Control Port	Ant 0	Ant 1	Ant 0	Ant 1	Ant 2	Ant 3
APEX0574						
APEX0577			APEX0575			

2.6. Test Mode

Test Mode	Mode 1: Transmit by 802.11b (1Mbps)
	Mode 2: Transmit by 802.11g (6Mbps)
	Mode 3: Transmit by 802.11n-HT20 (MCS0)
	Mode 4: Transmit by 802.11n-HT40 (MCS0)
	Mode 5: Transmit by 802.11ax-HE20 (MCS0)
	Mode 6: Transmit by 802.11ax-HE40 (MCS0)


2.7. Duty Cycle

2.4GHz WLAN (DTS) operation is possible in 20MHz, and 40MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than $50/T$, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:


Test Mode	Duty Cycle
802.11b	94.55%
802.11g	94.42%
802.11n-HT20	94.04%
802.11n-HT40	88.77%
802.11ax-HE20	97.35%
802.11ax-HE40	94.68%

Duty Cycle (T = Transmission Duration)


802.11b (T = 12.31ms)

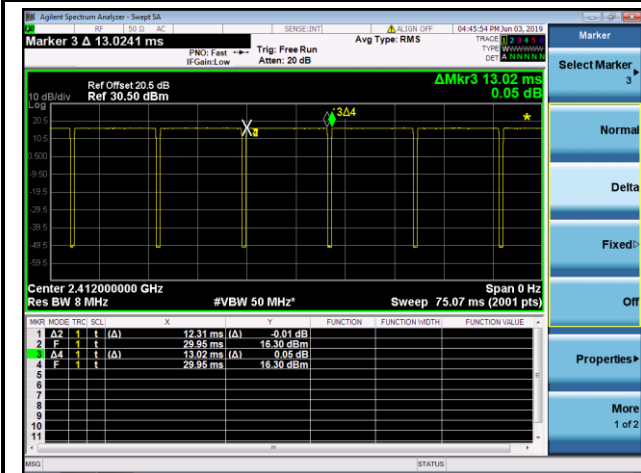


802.11g (T = 2.049ms)

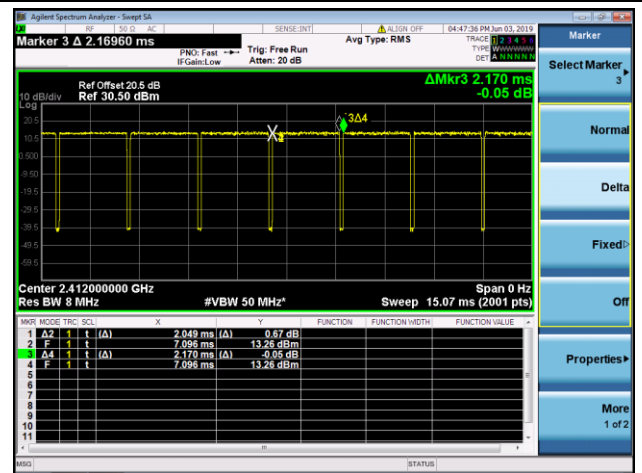


802.11n-HT20 (T = 1.895ms)

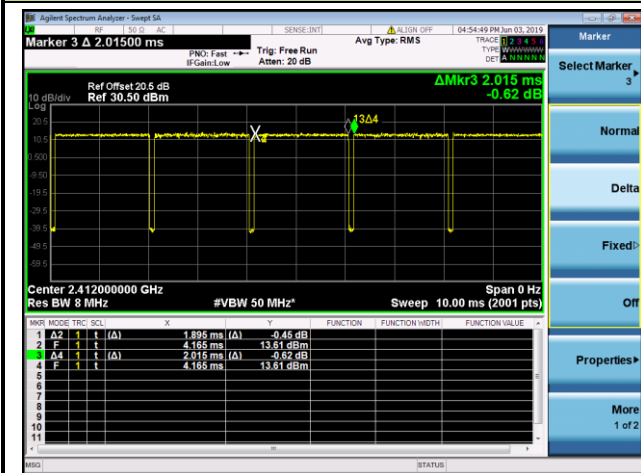


802.11n-HT40 (T = 934.8us)

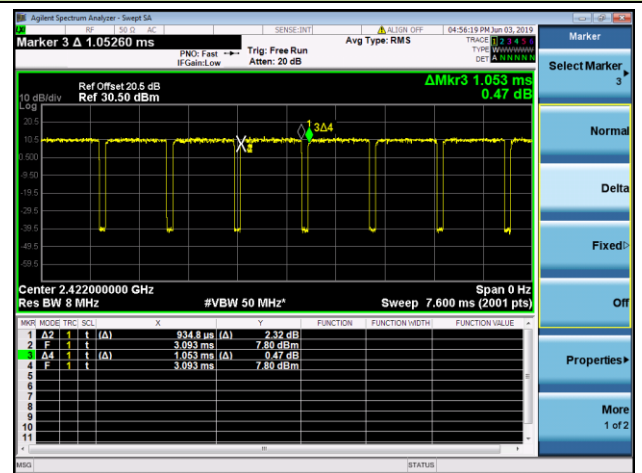

802.11ax-HE20 (T = 1.470ms)

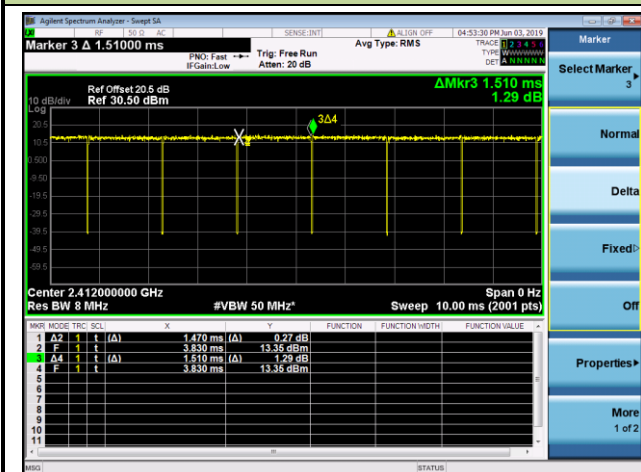

802.11ax-HE40 (T = 765.1us)

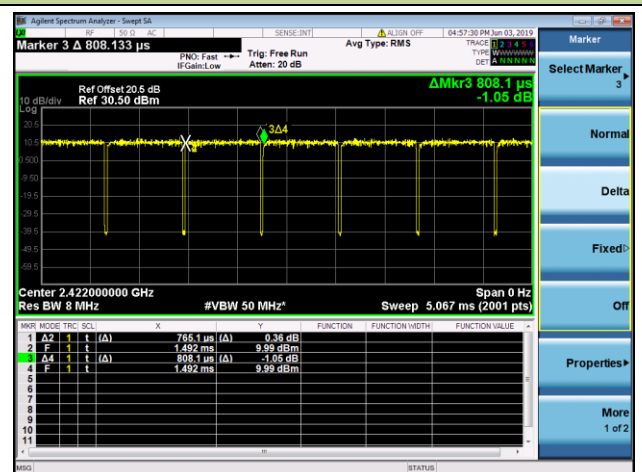

2.8. Description of Test Software

The test utility software used during testing was “accessMTool”, and the version was “v3.0.0.7”. Detail power setting refer to operation description

2.9. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.10. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION of TEST

3.1. Measurement Procedure

The measurement procedure described in the document titled “American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices” (ANSI C63.10-2013) was used in the measurement.

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

Conclusion:

The product is defined as the professional installation of equipment by the manufacturer, there is no necessary to comply with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV 216	MRTTWA00019	1 year	2021/03/26
Two-Line V-Network	R&S	ENV 216	MRTTWA00020	1 year	2020/04/25
8-Wire ISN (T8)	R&S	ENV81	MRTTWA00018	1 year	2020/04/23
EMI Test Receiver	R&S	ESR3	MRTTWA00045	1 year	2020/05/29
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00033	1 year	2020/05/30

Radiated Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2020/04/29
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2020/06/04
Broadband Horn antenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	1 year	2020/04/22
Breitband Horn antenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2020/04/23
Broadband Preamplifier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2020/04/24
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2020/04/24
Signal Analyzer	R&S	FSV40	MRTTWA00007	1 year	2021/03/24
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2021/03/25
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2020/10/02
Antenna Cable	HUBERSUHNER	SF106	MRTTWE00010	1 year	2020/04/22
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00032	1 year	2020/05/30

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00014	1 year	2020/04/22
Wideband Radio Communication Taster	R&S	CMW 500	MRTTWA00041	1 year	2021/01/28
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2020/10/02
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2020/07/11
Signal Analyzer	R&S	FSV40	MRTTWA00007	1 year	2021/03/24
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00033	1 year	2020/05/30

Software	Version	Function
e3	9.160520a	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 150kHz~30MHz: 2.53dB
Radiated Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 9kHz ~ 1GHz: 4.25dB 1GHz ~ 40GHz: 4.45dB

7. TEST RESULT

7.1. Summary

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 7.2
15.247(b)(3)	Output Power	$\leq 30\text{dBm}$		Pass	Section 7.3
15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$		Pass	Section 7.4
15.247(d)	Band Edge / Out-of-Band Emissions	$\geq 30\text{dBc}$ (Average)		Pass	Section 7.5
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 7.6 & 7.7
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.8

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 3) Test Items "6dB Bandwidth" & "Band Edge / Out-of-Band Emissions" have been assessed MIMO transmission, and showed the worst test data in this report.

7.2. 6dB Bandwidth Measurement

7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.2.2. Test Procedure used

ANSI C63.10-2013 Section 11.8

7.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize

7.2.4. Test Setup

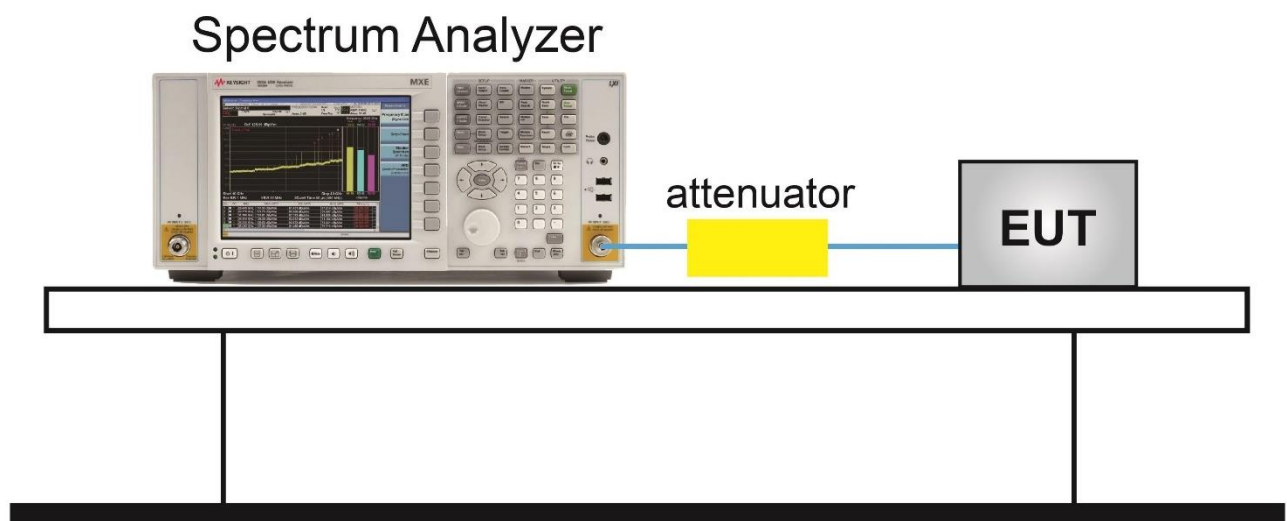


7.2.5. Test Result

Product	ACCESS POINT	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	65%
Test Site	SR2	Test Date	2020/01/11
Test Item	6dB Bandwidth	Model Name	APEX0574


Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
Ant 0 / Ant 0 + 1						
802.11b	1Mbps	01	2412	7.09	≥ 0.5	Pass
802.11b	1Mbps	06	2437	6.55	≥ 0.5	Pass
802.11b	1Mbps	11	2462	7.01	≥ 0.5	Pass
802.11g	6Mbps	01	2412	16.38	≥ 0.5	Pass
802.11g	6Mbps	06	2437	16.39	≥ 0.5	Pass
802.11g	6Mbps	11	2462	16.37	≥ 0.5	Pass
802.11n-HT20	MCS0	01	2412	17.61	≥ 0.5	Pass
802.11n-HT20	MCS0	06	2437	17.63	≥ 0.5	Pass
802.11n-HT20	MCS0	11	2462	17.65	≥ 0.5	Pass
802.11n-HT40	MCS0	03	2422	36.34	≥ 0.5	Pass
802.11n-HT40	MCS0	06	2437	36.39	≥ 0.5	Pass
802.11n-HT40	MCS0	09	2452	36.38	≥ 0.5	Pass
802.11ax-HE20	MCS0	01	2412	19.00	≥ 0.5	Pass
802.11ax-HE20	MCS0	06	2437	18.97	≥ 0.5	Pass
802.11ax-HE20	MCS0	11	2462	18.95	≥ 0.5	Pass
802.11ax-HE40	MCS0	03	2422	37.18	≥ 0.5	Pass
802.11ax-HE40	MCS0	06	2437	37.37	≥ 0.5	Pass
802.11ax-HE40	MCS0	09	2452	37.36	≥ 0.5	Pass

802.11b 6dB Bandwidth - Ant 0 / Ant 0 + 1


Channel 01 (2412MHz)



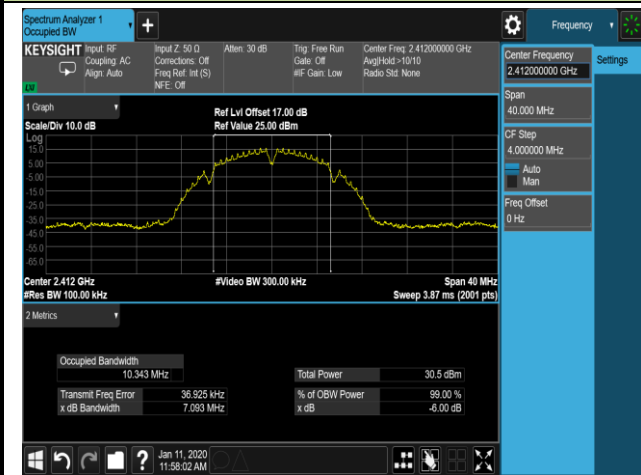





Channel 06 (2437MHz)



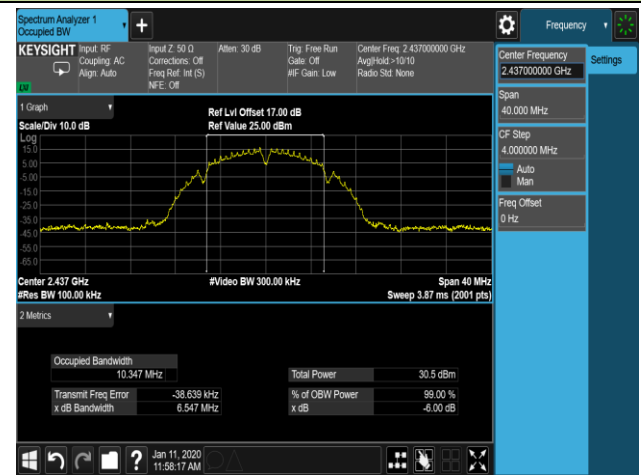


Channel 11 (2462MHz)

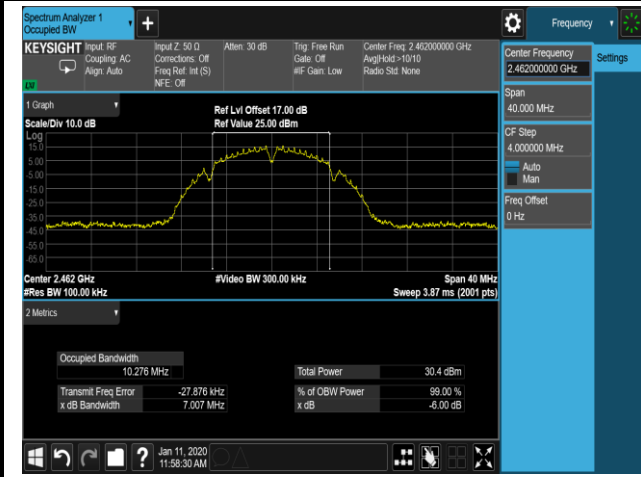

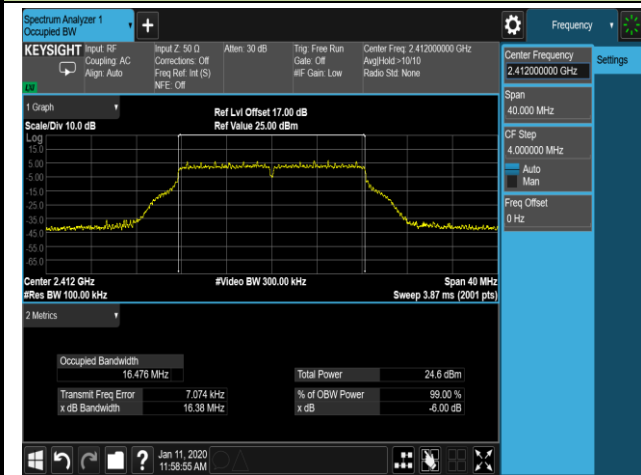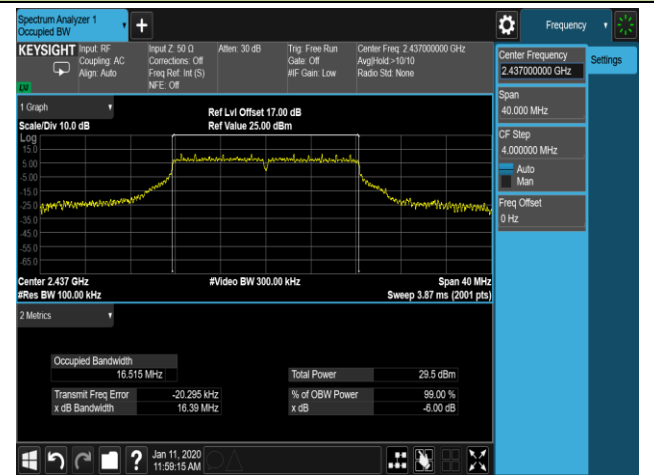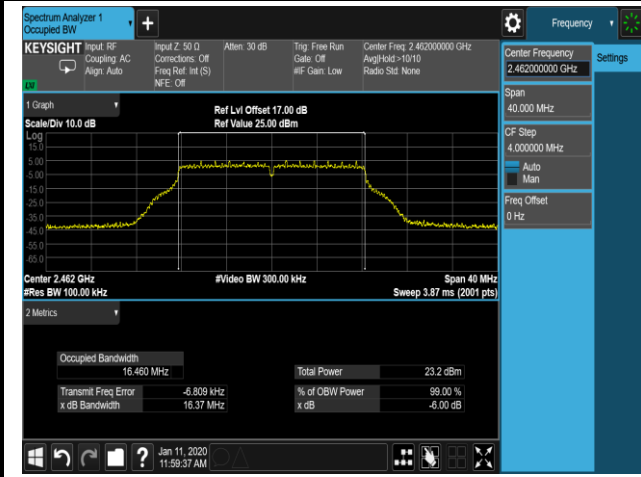
802.11g 6dB Bandwidth - Ant 0 / Ant 0 + 1
Channel 01 (2412MHz)

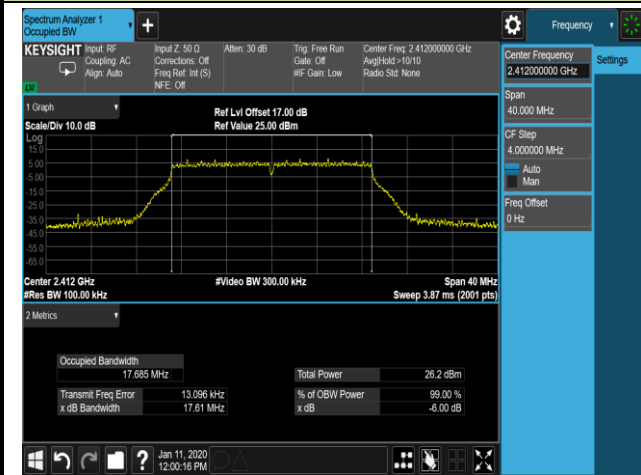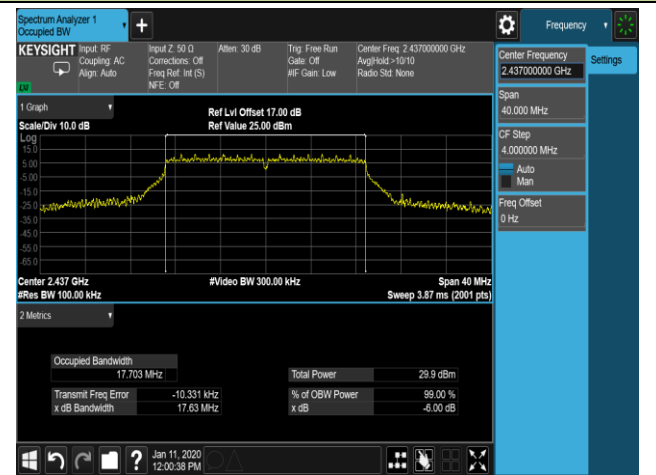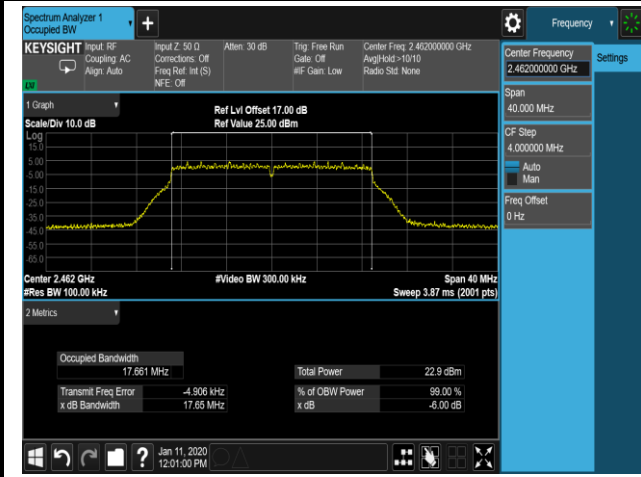Channel 06 (2437MHz)

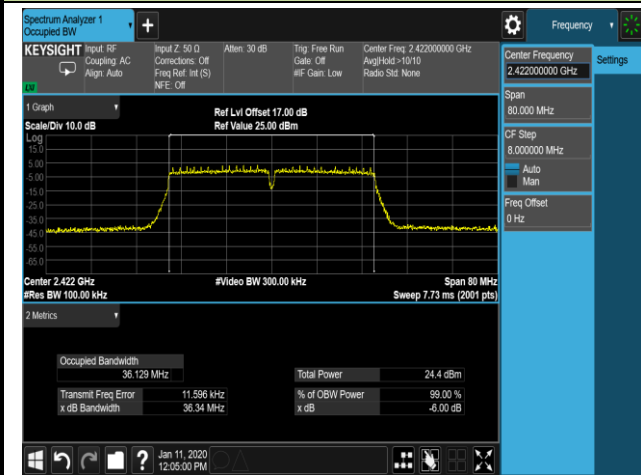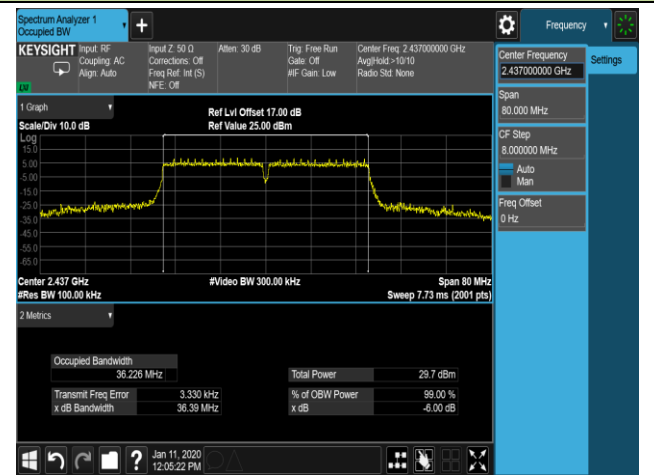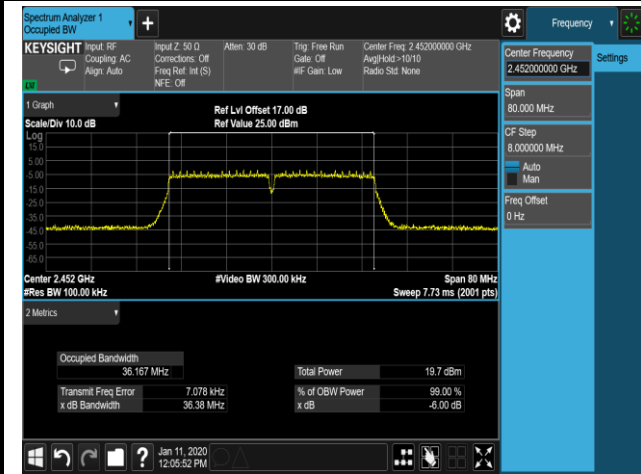Channel 11 (2462MHz)


802.11n-HT20 6dB Bandwidth - Ant 0 / Ant 0 + 1
Channel 01 (2412MHz)

Channel 06 (2437MHz)

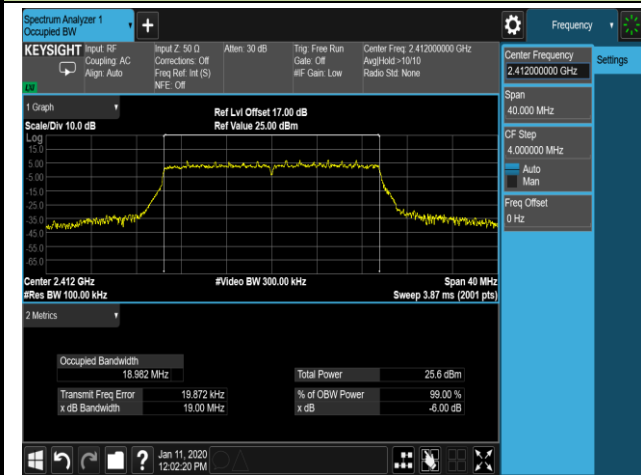Channel 11 (2462MHz)


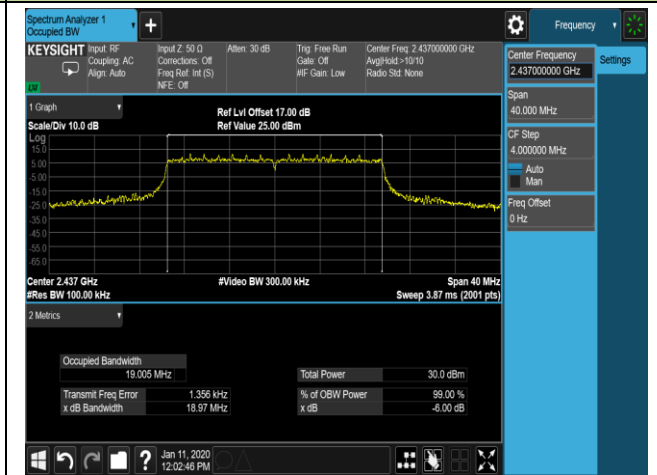
802.11n-HT40 6dB Bandwidth - Ant 0 / Ant 0 + 1
Channel 03 (2422MHz)

Channel 06 (2437MHz)

Channel 09 (2452MHz)


802.11ax-HE20 6dB Bandwidth - Ant 0 / Ant 0 + 1


Channel 01 (2412MHz)



Channel 06 (2437MHz)




Channel 11 (2462MHz)

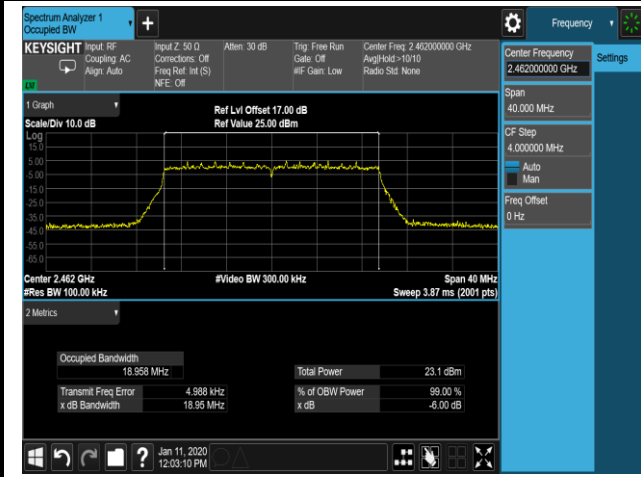


802.11ax-HE40 6dB Bandwidth - Ant 0 / Ant 0 + 1


Channel 03 (2422MHz)

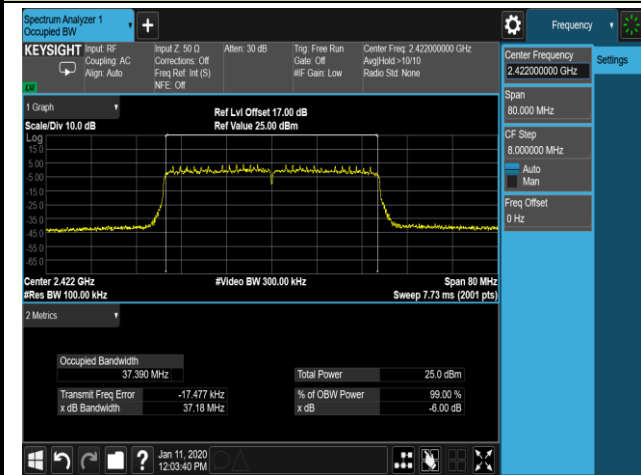

Channel 06 (2437MHz)

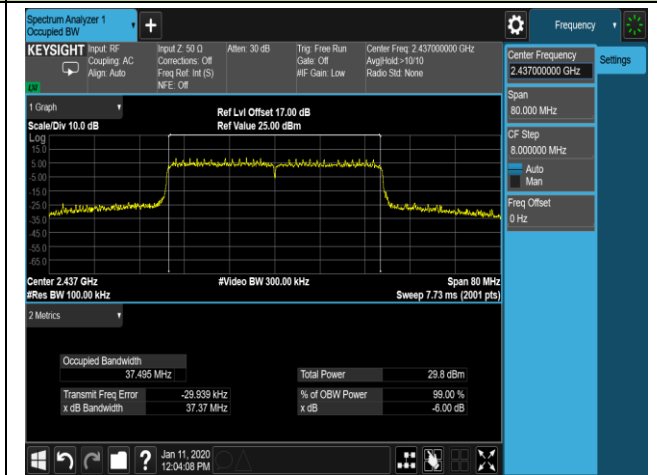

Channel 09 (2452MHz)

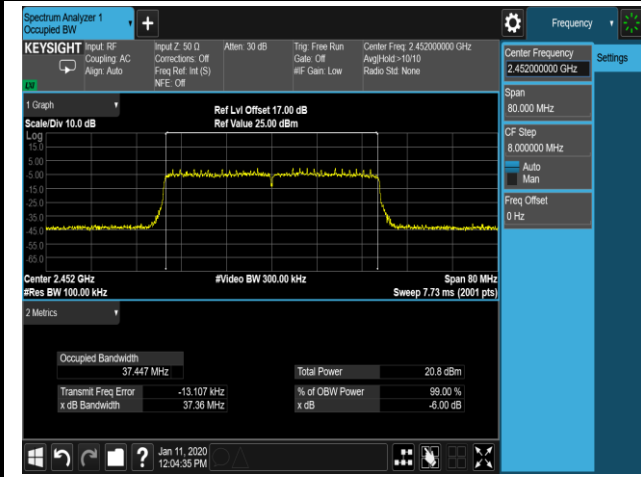

7.3. Output Power Measurement

7.3.1. Test Limit

The maximum output power shall be less 1 Watt (30dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

7.3.2. Test Procedure Used


ANSI C63.10 Section 11.9.2.3

7.3.3. Test Setting

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

7.3.4. Test Setup

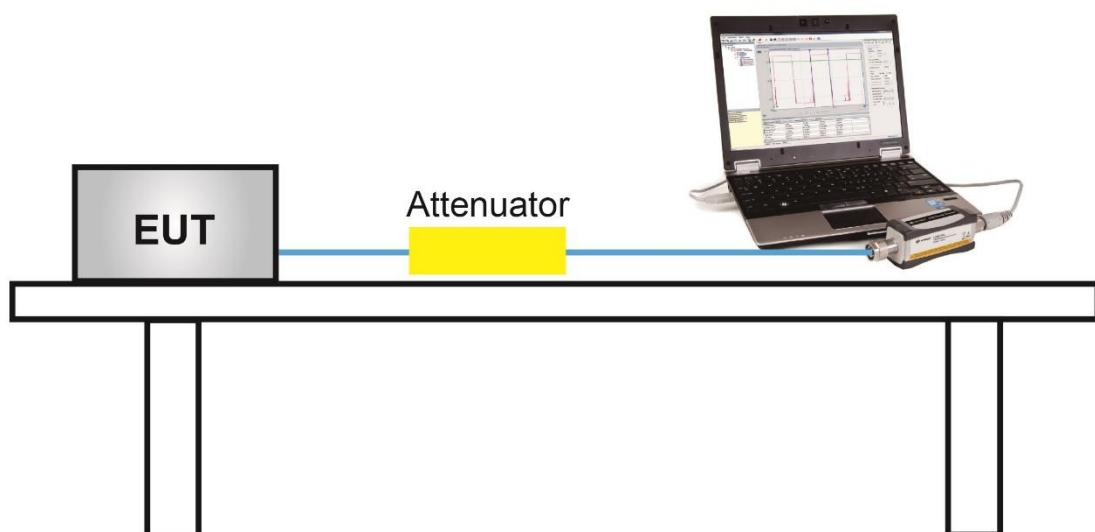

7.3.5. Test Result of Output Power

Power output test was verified over all data rates of each mode shown as below table, and then choose the maximum power output (gray marker) for final test of each channel.

For Ant 0 / Ant 0 + 1 port (APEX0574):

Test Mode	Bandwidth (MHz)	Channel No.	Frequency (MHz)	Data Rate/ MCS	Average Power (dBm)
802.11b	20	6	2437	1Mbps	22.98
				5.5Mbps	22.71
				11Mbps	22.54
802.11g	20	6	2437	6Mbps	22.64
				24Mbps	22.43
				54Mbps	22.18
802.11n	20	6	2437	MCS0	22.63
				MCS3	22.46
				MCS7	22.34
802.11n	40	6	2437	MCS0	22.32
				MCS3	22.15
				MCS7	21.88
802.11ax-HE	20	6	2437	MCS0	22.89
				MCS3	22.76
				MCS7	22.57
802.11ax-HE	40	6	2437	MCS0	22.66
				MCS3	22.48
				MCS7	22.30

Product	ACCESS POINT	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	54%
Test Site	SR2	Test Date	2020/01/13
Antenna Type	Omni Antenna (ANT-2x2-2005)	Test Item	Output Power
Model Name	APEX0574		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Total Average Power (dBm)	Limit (dBm)	Result
11b	1Mbps	1	2412	22.88	23.07	25.99	≤ 30.00	Pass
11b	1Mbps	6	2437	22.98	22.77	25.89	≤ 30.00	Pass
11b	1Mbps	11	2462	23.24	23.12	26.19	≤ 30.00	Pass
11g	6Mbps	1	2412	17.34	17.32	20.34	≤ 30.00	Pass
11g	6Mbps	2	2417	20.57	21.02	23.81	≤ 30.00	Pass
11g	6Mbps	6	2437	22.64	22.42	25.54	≤ 30.00	Pass
11g	6Mbps	10	2457	20.46	21.39	23.96	≤ 30.00	Pass
11g	6Mbps	11	2462	15.98	15.99	19.00	≤ 30.00	Pass
11n-HT20	MCS0	1	2412	18.91	18.70	21.82	≤ 30.00	Pass
11n-HT20	MCS0	2	2417	22.30	22.20	25.26	≤ 30.00	Pass
11n-HT20	MCS0	6	2437	22.63	22.17	25.42	≤ 30.00	Pass
11n-HT20	MCS0	10	2457	22.03	22.13	25.09	≤ 30.00	Pass
11n-HT20	MCS0	11	2462	15.30	15.20	18.26	≤ 30.00	Pass
11n-HT40	MCS0	3	2422	16.84	16.78	19.82	≤ 30.00	Pass
11n-HT40	MCS0	4	2427	22.22	21.93	25.09	≤ 30.00	Pass
11n-HT40	MCS0	6	2437	20.01	20.37	23.20	≤ 30.00	Pass
11n-HT40	MCS0	8	2447	16.56	16.67	19.63	≤ 30.00	Pass
11n-HT40	MCS0	9	2452	12.15	12.06	15.12	≤ 30.00	Pass
11ax-HE20	MCS0	1	2412	18.33	18.20	21.28	≤ 30.00	Pass
11ax-HE20	MCS0	2	2417	20.63	20.79	23.72	≤ 30.00	Pass
11ax-HE20	MCS0	6	2437	22.89	22.63	25.77	≤ 30.00	Pass
11ax-HE20	MCS0	10	2457	18.98	19.31	22.16	≤ 30.00	Pass
11ax-HE20	MCS0	11	2462	14.04	14.13	17.10	≤ 30.00	Pass
11ax-HE40	MCS0	3	2422	17.42	17.55	20.50	≤ 30.00	Pass
11ax-HE40	MCS0	4	2427	19.36	19.42	22.40	≤ 30.00	Pass
11ax-HE40	MCS0	6	2437	20.22	20.53	23.39	≤ 30.00	Pass
11ax-HE40	MCS0	8	2447	16.44	16.70	19.58	≤ 30.00	Pass

11ax-HE40	MCS0	9	2452	13.44	13.30	16.38	≤ 30.00	Pass
-----------	------	---	------	-------	-------	-------	---------	------

Note: Total Average Power (dBm) = $10 \cdot \log\{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$ (dBm).

Product	ACCESS POINT	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	55%
Test Site	SR2	Test Date	2020/01/15
Antenna Type	Internal Antenna	Test Item	Output Power
Model Name	APEX0575		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Total Average Power (dBm)	Limit (dBm)	Result
11b	1Mbps	1	2412	22.66	22.90	25.79	≤ 30.00	Pass
11b	1Mbps	6	2437	22.76	22.93	25.86	≤ 30.00	Pass
11b	1Mbps	11	2462	22.78	22.91	25.86	≤ 30.00	Pass
11g	6Mbps	1	2412	19.26	19.23	22.26	≤ 30.00	Pass
11g	6Mbps	2	2417	21.85	21.54	24.71	≤ 30.00	Pass
11g	6Mbps	6	2437	22.79	22.87	25.84	≤ 30.00	Pass
11g	6Mbps	10	2457	21.63	21.66	24.66	≤ 30.00	Pass
11g	6Mbps	11	2462	18.96	19.09	22.04	≤ 30.00	Pass
11n-HT20	MCS0	1	2412	19.89	20.03	22.97	≤ 30.00	Pass
11n-HT20	MCS0	2	2417	22.01	22.04	25.04	≤ 30.00	Pass
11n-HT20	MCS0	6	2437	22.77	22.58	25.69	≤ 30.00	Pass
11n-HT20	MCS0	10	2457	21.59	21.94	24.78	≤ 30.00	Pass
11n-HT20	MCS0	11	2462	19.66	19.55	22.62	≤ 30.00	Pass
11n-HT40	MCS0	3	2422	18.19	18.25	21.23	≤ 30.00	Pass
11n-HT40	MCS0	4	2427	18.96	18.76	21.87	≤ 30.00	Pass
11n-HT40	MCS0	6	2437	20.20	20.24	23.23	≤ 30.00	Pass
11n-HT40	MCS0	8	2447	18.06	17.88	20.98	≤ 30.00	Pass
11n-HT40	MCS0	9	2452	17.20	17.26	20.24	≤ 30.00	Pass
11ax-HE20	MCS0	1	2412	19.65	19.36	22.52	≤ 30.00	Pass
11ax-HE20	MCS0	2	2417	21.12	21.20	24.17	≤ 30.00	Pass
11ax-HE20	MCS0	6	2437	22.76	22.46	25.62	≤ 30.00	Pass
11ax-HE20	MCS0	10	2457	20.63	20.83	23.74	≤ 30.00	Pass
11ax-HE20	MCS0	11	2462	17.47	17.46	20.48	≤ 30.00	Pass
11ax-HE40	MCS0	3	2422	18.26	18.50	21.39	≤ 30.00	Pass
11ax-HE40	MCS0	4	2427	18.87	18.72	21.81	≤ 30.00	Pass
11ax-HE40	MCS0	6	2437	19.32	19.30	22.32	≤ 30.00	Pass
11ax-HE40	MCS0	8	2447	18.52	18.26	21.40	≤ 30.00	Pass

11ax-HE40	MCS0	9	2452	16.98	17.18	20.09	≤ 30.00	Pass
-----------	------	---	------	-------	-------	-------	---------	------

Note: Total Average Power (dBm) = $10 \cdot \log\{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$ (dBm).

Product	ACCESS POINT	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	46%
Test Site	SR2	Test Date	2020/03/08
Antenna Type	Internal Antenna	Test Item	Output Power
Model Name	APEX0577		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Total Average Power (dBm)	Limit (dBm)	Result
11b	1Mbps	1	2412	21.93	22.31	25.13	≤ 29.20	Pass
11b	1Mbps	6	2437	22.60	22.54	25.58	≤ 29.20	Pass
11b	1Mbps	11	2462	21.71	22.40	25.08	≤ 29.20	Pass
11g	6Mbps	1	2412	19.26	19.40	22.34	≤ 29.20	Pass
11g	6Mbps	2	2417	21.79	21.74	24.78	≤ 29.20	Pass
11g	6Mbps	6	2437	22.71	22.44	25.59	≤ 29.20	Pass
11g	6Mbps	10	2457	21.93	22.07	25.01	≤ 29.20	Pass
11g	6Mbps	11	2462	18.50	18.93	21.73	≤ 29.20	Pass
11n-HT20	MCS0	1	2412	19.04	19.51	22.29	≤ 29.20	Pass
11n-HT20	MCS0	2	2417	21.51	21.55	24.54	≤ 29.20	Pass
11n-HT20	MCS0	6	2437	22.54	22.43	25.50	≤ 29.20	Pass
11n-HT20	MCS0	10	2457	21.40	21.47	24.45	≤ 29.20	Pass
11n-HT20	MCS0	11	2462	18.47	18.80	21.65	≤ 29.20	Pass
11n-HT40	MCS0	3	2422	18.03	18.35	21.20	≤ 29.20	Pass
11n-HT40	MCS0	4	2427	18.84	18.98	21.92	≤ 29.20	Pass
11n-HT40	MCS0	6	2437	19.77	19.82	22.81	≤ 29.20	Pass
11n-HT40	MCS0	8	2447	17.70	17.84	20.78	≤ 29.20	Pass
11n-HT40	MCS0	9	2452	15.84	15.88	18.87	≤ 29.20	Pass
11ax-HE20	MCS0	1	2412	18.61	18.91	21.77	≤ 29.20	Pass
11ax-HE20	MCS0	2	2417	21.36	21.39	24.39	≤ 29.20	Pass
11ax-HE20	MCS0	6	2437	22.61	22.62	25.63	≤ 29.20	Pass
11ax-HE20	MCS0	10	2457	20.08	20.50	23.31	≤ 29.20	Pass
11ax-HE20	MCS0	11	2462	16.64	17.07	19.87	≤ 29.20	Pass
11ax-HE40	MCS0	3	2422	17.87	18.11	21.00	≤ 29.20	Pass
11ax-HE40	MCS0	4	2427	18.74	18.93	21.85	≤ 29.20	Pass
11ax-HE40	MCS0	6	2437	19.60	19.77	22.70	≤ 29.20	Pass
11ax-HE40	MCS0	8	2447	16.81	16.21	19.53	≤ 29.20	Pass

11ax-HE40	MCS0	9	2452	15.56	15.55	18.57	≤ 29.20	Pass
-----------	------	---	------	-------	-------	-------	--------------	------

Note 1: Total Average Power (dBm) = $10 \cdot \log\{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$ (dBm).

Note 2: Limit (dBm) = 30 dBm – (6.8 dBi – 6.0 dBi) = 29.2 dBm.

7.4. Power Spectral Density Measurement

7.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.

7.4.2. Test Procedure Used


ANSI C63.10 Section 11.10.6

7.4.3. Test Setting

1. Measure the duty cycle (x) of the transmitter output signal.
2. Set instrument center frequency to DTS channel center frequency.
3. Set span to at least 1.5 times the OBW.
4. RBW = 10 kHz.
5. VBW = 30 kHz.
6. Detector = RMS.
7. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
8. Sweep time = auto couple.
9. Don't use sweep triggering. Allow sweep to "free run".
10. Employ trace averaging (RMS) mode over a minimum of 100 traces.
11. Use the peak marker function to determine the maximum amplitude level.
12. Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

7.4.4. Test Setup

Spectrum Analyzer

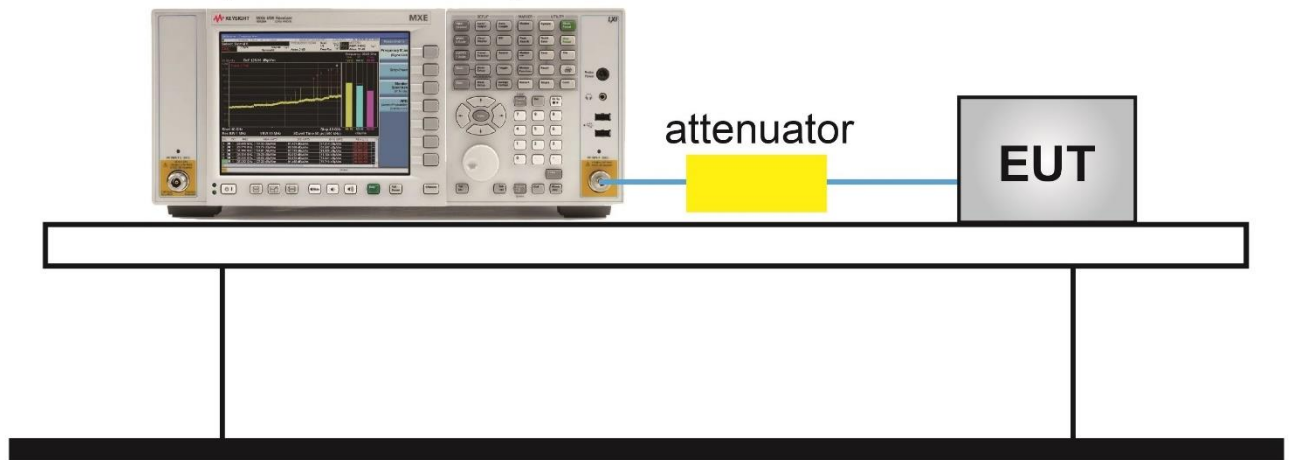

7.4.5. Test Result

For APEX0574, please refer to Annex A clause 1;

For APEX0575, please refer to Annex B clause 1;

For APEX0577, please refer to Annex C clause 1;

7.5. Conducted Band Edge and Out-of-Band Emissions

7.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure.

7.5.2. Test Procedure Used

ANSI C63.10 Section 11.11

7.5.3. Test Setting

1. Reference level measurement

- a) Set instrument center frequency to DTS channel center frequency
- b) Set the span to ≥ 1.5 times the DTS bandwidth
- c) Set the RBW = 100 kHz
- d) Set the VBW $\geq 3 \times$ RBW
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize


2. Emission level measurement

- a) Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
- b) RBW = 1.3MHz
- c) VBW = 4MHz
- d) Detector = Peak
- e) Trace mode = max hold
- f) Sweep time = auto couple
- g) The trace was allowed to stabilize

Test Notes

1. RBW was set to 1.3MHz rather than 100kHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 30dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1.3MHz RBW, the display line may not necessarily appear to be 30dB below the level of the fundamental in a 1.3MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.

7.5.4. Test Setup

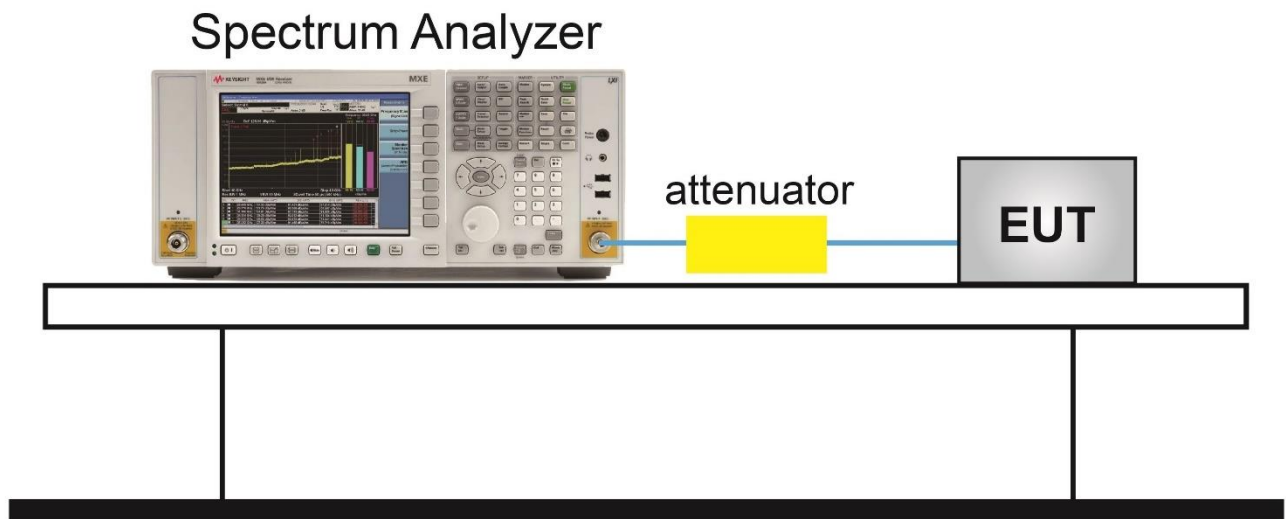

7.5.5. Test Result


Product	ACCESS POINT	Temperature	27°C
Test Engineer	Kevin Ker	Relative Humidity	65%
Test Site	SR2	Test Date	2020/01/13
Test Item	Conducted Band Edge and Out-of-Band Emissions		
Model Name	APEX0574		

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	Limit (dBc)	Result
Ant 0 / Ant 0 + 1					
802.11b	1Mbps	01	2412	30	Pass
802.11b	1Mbps	06	2437	30	Pass
802.11b	1Mbps	11	2462	30	Pass
802.11g	6Mbps	01	2412	30	Pass
802.11g	6Mbps	06	2437	30	Pass
802.11g	6Mbps	11	2462	30	Pass
802.11n-HT20	MCS0	01	2412	30	Pass
802.11n-HT20	MCS0	06	2437	30	Pass
802.11n-HT20	MCS0	11	2462	30	Pass
802.11n-HT40	MCS0	03	2422	30	Pass
802.11n-HT40	MCS0	06	2437	30	Pass
802.11n-HT40	MCS0	09	2452	30	Pass
802.11ax-HE20	MCS0	01	2412	30	Pass
802.11ax-HE20	MCS0	06	2437	30	Pass
802.11ax-HE20	MCS0	11	2462	30	Pass
802.11ax-HE40	MCS0	03	2422	30	Pass
802.11ax-HE40	MCS0	06	2437	30	Pass
802.11ax-HE40	MCS0	09	2452	30	Pass


802.11b Out-of-Band Emissions - Ant 0 / Ant 0 + 1

Channel 01 (2412MHz)


100kHz PSD reference Level

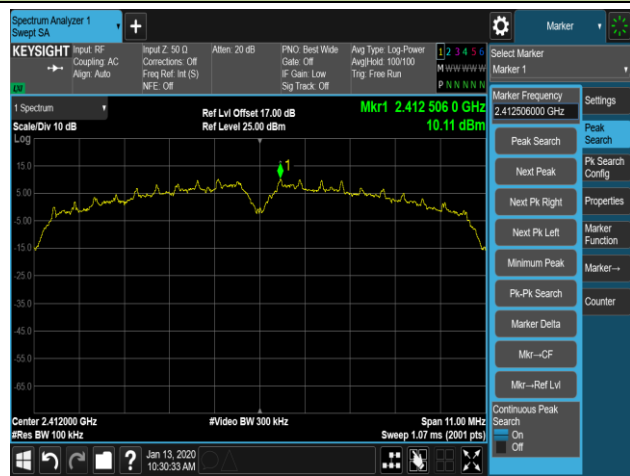

Low Band Edge

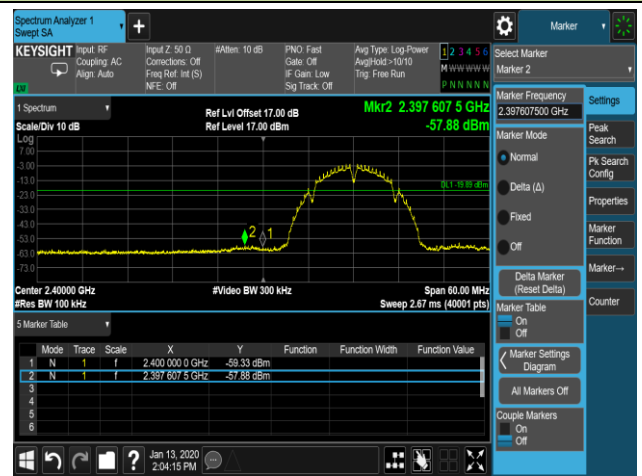


Spurious Emission

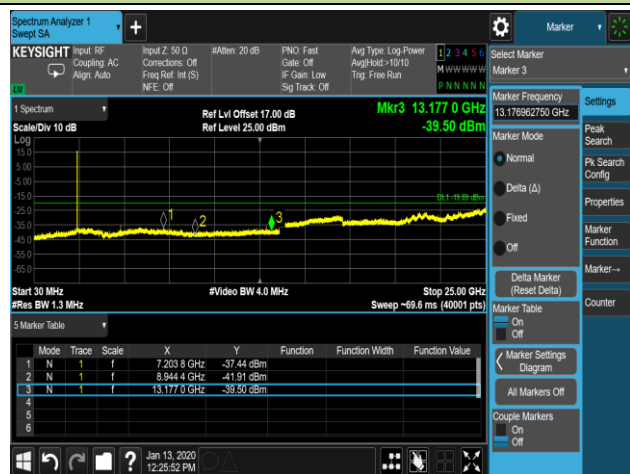

Note: The Value of the Display Line is -19.89m

Channel 06 (2437MHz)

100kHz PSD reference Level

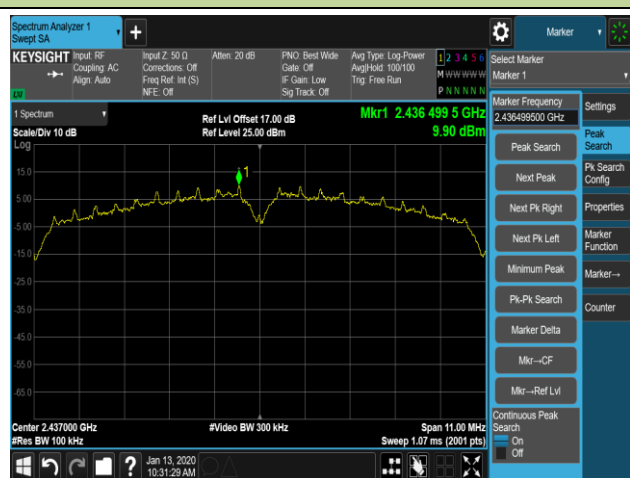


Spurious Emission




Note: The Value of the Display Line is -20.10Bm

802.11b Out-of-Band Emissions - Ant 0 / Ant 0 + 1
Channel 11 (2462MHz)

100kHz PSD reference Level

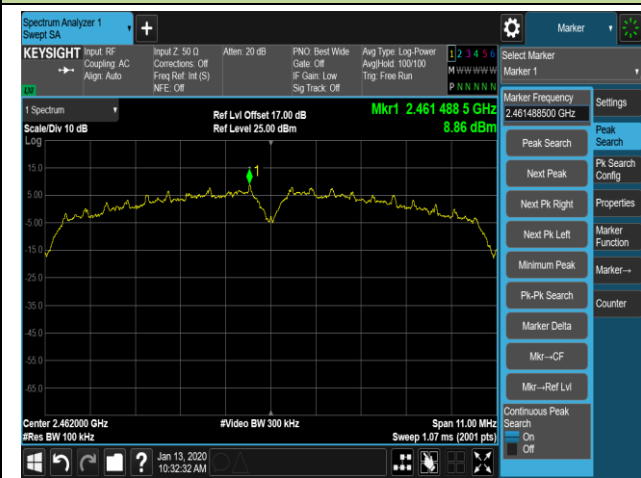

High Band Edge

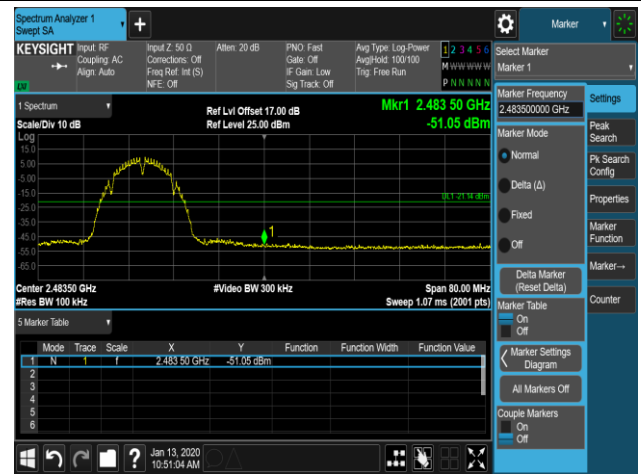

Spurious Emission



Note: The Value of the Display Line is -21.14


802.11g Out-of-Band Emissions - Ant 0 / Ant 0 + 1

Channel 01 (2412MHz)

100kHz PSD reference Level



Low Band Edge

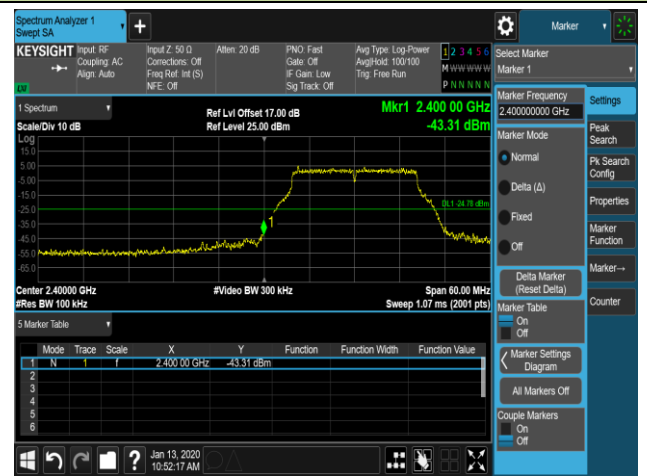


Spurious Emission




Note: The Value of the Display Line is -24.78dBm

Channel 06 (2437MHz)

100kHz PSD reference Level

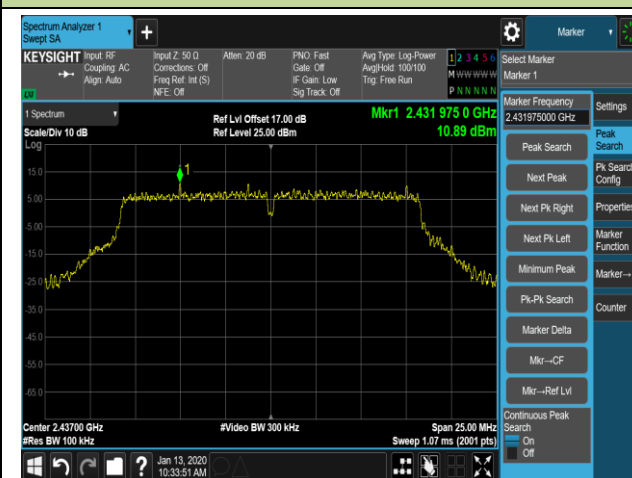


Spurious Emission

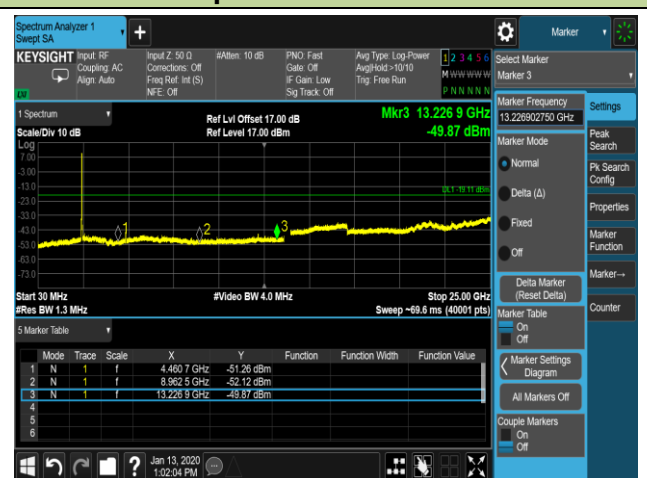


Note: The Value of the Display Line is -19.11dBm

802.11g Out-of-Band Emissions - Ant 0 / Ant 0 + 1
Channel 11 (2462MHz)

100kHz PSD reference Level

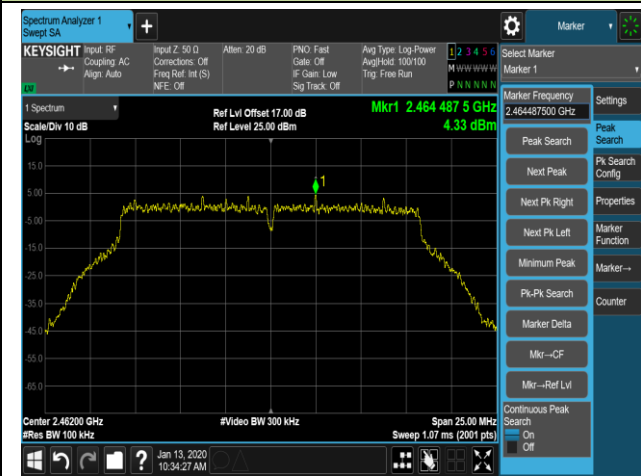

High Band Edge

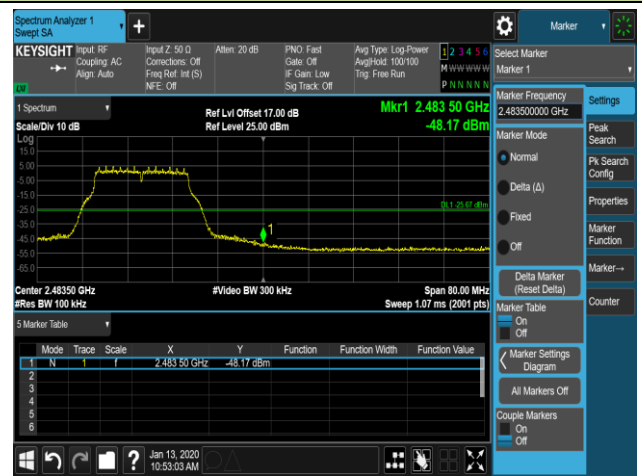

Spurious Emission



Note: The Value of the Display Line is -25.67dBm