



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3	Test Channel:	36
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7468.5	32.2	11.6	43.8	54.0	-10.2	Peak	Horizontal
	8310.0	31.5	12.4	43.9	54.0	-10.1	Peak	Horizontal
*	8786.0	31.7	13.2	44.9	68.2	-23.3	Peak	Horizontal
*	9831.5	34.1	14.7	48.8	68.2	-19.4	Peak	Horizontal
	7477.0	32.6	11.7	44.3	54.0	-9.7	Peak	Vertical
	8182.5	32.5	12.3	44.8	54.0	-9.2	Peak	Vertical
*	8650.0	33.3	12.9	46.2	68.2	-22.0	Peak	Vertical
*	9653.0	33.3	14.1	47.4	68.2	-20.8	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3	Test Channel:	44
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7536.5	32.8	11.8	44.6	54.0	-9.4	Peak	Horizontal
	8242.0	31.8	12.3	44.1	54.0	-9.9	Peak	Horizontal
*	8735.0	32.7	13.1	45.8	68.2	-22.4	Peak	Horizontal
*	9789.0	33.2	14.6	47.8	68.2	-20.4	Peak	Horizontal
	7434.5	32.7	11.6	44.3	54.0	-9.7	Peak	Vertical
	8250.5	33.6	12.3	45.9	54.0	-8.1	Peak	Vertical
*	8735.0	32.0	13.1	45.1	68.2	-23.1	Peak	Vertical
*	9738.0	34.3	14.4	48.7	68.2	-19.5	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3	Test Channel:	48
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBµV)	Factor (dB)	Measure Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Polarization
	7553.5	32.2	11.8	44.0	54.0	-10.0	Peak	Horizontal
	8267.5	31.9	12.4	44.3	54.0	-9.7	Peak	Horizontal
*	8658.5	32.4	12.9	45.3	68.2	-22.9	Peak	Horizontal
*	10265.0	32.5	16.1	48.6	68.2	-19.6	Peak	Horizontal
	7621.5	32.4	11.8	44.2	54.0	-9.8	Peak	Vertical
	8276.0	32.6	12.4	45.0	54.0	-9.0	Peak	Vertical
*	8820.0	31.0	13.3	44.3	68.2	-23.9	Peak	Vertical
*	10256.5	31.9	16.1	48.0	68.2	-20.2	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBµV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2019/12/12
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3	Test Channel:	52
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7638.5	32.5	11.9	44.4	54.0	-9.6	Peak	Horizontal
	8165.5	32.2	12.3	44.5	54.0	-9.5	Peak	Horizontal
*	8692.5	32.9	13.0	45.9	68.2	-22.3	Peak	Horizontal
*	10350.0	31.9	16.4	48.3	68.2	-19.9	Peak	Horizontal
	7630.0	32.8	11.8	44.6	54.0	-9.4	Peak	Vertical
	8233.5	32.6	12.3	44.9	54.0	-9.1	Peak	Vertical
*	8743.5	32.0	13.1	45.1	68.2	-23.1	Peak	Vertical
*	9695.5	33.8	14.3	48.1	68.2	-20.1	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2019/12/12
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3	Test Channel:	60
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7570.5	31.8	11.8	43.6	54.0	-10.4	Peak	Horizontal
	8276.0	32.4	12.4	44.8	54.0	-9.2	Peak	Horizontal
*	8769.0	32.0	13.2	45.2	68.2	-23.0	Peak	Horizontal
*	9755.0	34.3	14.5	48.8	68.2	-19.4	Peak	Horizontal
	7570.5	32.8	11.8	44.6	54.0	-9.4	Peak	Vertical
	8276.0	31.9	12.4	44.3	54.0	-9.7	Peak	Vertical
*	8743.5	32.7	13.1	45.8	68.2	-22.4	Peak	Vertical
*	9695.5	34.8	14.3	49.1	68.2	-19.1	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2019/12/12
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3	Test Channel:	64
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7468.5	33.8	11.6	45.4	54.0	-8.6	Peak	Horizontal
	8267.5	32.4	12.4	44.8	54.0	-9.2	Peak	Horizontal
*	8854.0	32.2	13.4	45.6	68.2	-22.6	Peak	Horizontal
*	10273.5	32.8	16.1	48.9	68.2	-19.3	Peak	Horizontal
	7672.5	33.1	11.9	45.0	54.0	-9.0	Peak	Vertical
	8276.0	31.9	12.4	44.3	54.0	-9.7	Peak	Vertical
*	8752.0	32.0	13.1	45.1	68.2	-23.1	Peak	Vertical
*	9857.0	32.4	14.8	47.2	68.2	-21.0	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2019/12/12
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3	Test Channel:	100
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7613.0	31.4	11.8	43.2	54.0	-10.8	Peak	Horizontal
	8208.0	31.4	12.3	43.7	54.0	-10.3	Peak	Horizontal
*	8692.5	32.2	13.0	45.2	68.2	-23.0	Peak	Horizontal
*	9704.0	33.4	14.3	47.7	68.2	-20.5	Peak	Horizontal
	7502.5	33.1	11.7	44.8	54.0	-9.2	Peak	Vertical
	8199.5	31.7	12.3	44.0	54.0	-10.0	Peak	Vertical
*	8735.0	32.9	13.1	46.0	68.2	-22.2	Peak	Vertical
*	9636.0	34.7	14.1	48.8	68.2	-19.4	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2019/12/12
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3	Test Channel:	120
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7604.5	33.8	11.8	45.6	54.0	-8.4	Peak	Horizontal
	8327.0	33.1	12.4	45.5	54.0	-8.5	Peak	Horizontal
*	8735.0	31.8	13.1	44.9	68.2	-23.3	Peak	Horizontal
*	9729.5	33.1	14.4	47.5	68.2	-20.7	Peak	Horizontal
	7468.5	32.9	11.6	44.5	54.0	-9.5	Peak	Vertical
	8386.5	32.7	12.4	45.1	54.0	-8.9	Peak	Vertical
*	8769.0	30.9	13.2	44.1	68.2	-24.1	Peak	Vertical
*	9772.0	33.1	14.5	47.6	68.2	-20.6	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)





Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2019/12/12
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3	Test Channel:	140
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7468.5	32.8	11.6	44.4	54.0	-9.6	Peak	Horizontal
	8250.5	32.0	12.3	44.3	54.0	-9.7	Peak	Horizontal
*	8735.0	31.0	13.1	44.1	68.2	-24.1	Peak	Horizontal
*	9763.5	34.0	14.5	48.5	68.2	-19.7	Peak	Horizontal
	7468.5	32.7	11.6	44.3	54.0	-9.7	Peak	Vertical
	8225.0	32.0	12.3	44.3	54.0	-9.7	Peak	Vertical
*	8692.5	31.3	13.0	44.3	68.2	-23.9	Peak	Vertical
*	10171.5	32.7	15.8	48.5	68.2	-19.7	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2019/12/12
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3	Test Channel:	144
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7468.5	32.6	11.6	44.2	54.0	-9.8	Peak	Horizontal
	8310.0	31.3	12.4	43.7	54.0	-10.3	Peak	Horizontal
*	8777.5	31.2	13.2	44.4	68.2	-23.8	Peak	Horizontal
*	10256.5	31.9	16.1	48.0	68.2	-20.2	Peak	Horizontal
	7579.0	31.9	11.8	43.7	54.0	-10.3	Peak	Vertical
	8276.0	31.6	12.4	44.0	54.0	-10.0	Peak	Vertical
*	8735.0	31.5	13.1	44.6	68.2	-23.6	Peak	Vertical
*	10078.0	30.6	15.5	46.1	68.2	-22.1	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3	Test Channel:	149
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7400.5	33.0	11.5	44.5	54.0	-9.5	Peak	Horizontal
	8242.0	32.4	12.3	44.7	54.0	-9.3	Peak	Horizontal
*	8794.5	32.4	13.2	45.6	68.2	-22.6	Peak	Horizontal
*	10180.0	31.9	15.8	47.7	68.2	-20.5	Peak	Horizontal
	7604.5	32.2	11.8	44.0	54.0	-10.0	Peak	Vertical
	8242.0	33.1	12.3	45.4	54.0	-8.6	Peak	Vertical
*	8811.5	31.2	13.3	44.5	68.2	-23.7	Peak	Vertical
*	10214.0	31.4	15.9	47.3	68.2	-20.9	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3	Test Channel:	157
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7613.0	31.9	11.8	43.7	54.0	-10.3	Peak	Horizontal
	8276.0	31.9	12.4	44.3	54.0	-9.7	Peak	Horizontal
*	8777.5	31.1	13.2	44.3	68.2	-23.9	Peak	Horizontal
*	10188.5	31.8	15.9	47.7	68.2	-20.5	Peak	Horizontal
	7511.0	32.1	11.7	43.8	54.0	-10.2	Peak	Vertical
	8310.0	31.5	12.4	43.9	54.0	-10.1	Peak	Vertical
*	8701.0	32.1	13.0	45.1	68.2	-23.1	Peak	Vertical
*	10044.0	32.6	15.4	48.0	68.2	-20.2	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ac-VHT20 - Ant 0 + 1 + 2 + 3	Test Channel:	165
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7570.5	32.5	11.8	44.3	54.0	-9.7	Peak	Horizontal
	8250.5	32.2	12.3	44.5	54.0	-9.5	Peak	Horizontal
*	8709.5	32.8	13.0	45.8	68.2	-22.4	Peak	Horizontal
*	10273.5	31.2	16.1	47.3	68.2	-20.9	Peak	Horizontal
	7698.0	30.9	11.9	42.8	54.0	-11.2	Peak	Vertical
	8344.0	31.6	12.4	44.0	54.0	-10.0	Peak	Vertical
*	8735.0	33.0	13.1	46.1	68.2	-22.1	Peak	Vertical
*	9763.5	33.8	14.5	48.3	68.2	-19.9	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3	Test Channel:	38
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7630.0	31.3	11.8	43.1	54.0	-10.9	Peak	Horizontal
	8199.5	32.9	12.3	45.2	54.0	-8.8	Peak	Horizontal
*	8888.0	31.0	13.5	44.5	68.2	-23.7	Peak	Horizontal
*	10129.0	31.0	15.7	46.7	68.2	-21.5	Peak	Horizontal
	7647.0	34.1	11.9	46.0	54.0	-8.0	Peak	Vertical
	8403.5	32.7	12.4	45.1	54.0	-8.9	Peak	Vertical
*	8820.0	31.3	13.3	44.6	68.2	-23.6	Peak	Vertical
*	9721.0	33.7	14.3	48.0	68.2	-20.2	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3	Test Channel:	46
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7604.5	32.4	11.8	44.2	54.0	-9.8	Peak	Horizontal
	8208.0	32.0	12.3	44.3	54.0	-9.7	Peak	Horizontal
*	8888.0	32.0	13.5	45.5	68.2	-22.7	Peak	Horizontal
*	10299.0	32.8	16.2	49.0	68.2	-19.2	Peak	Horizontal
	7536.5	33.2	11.8	45.0	54.0	-9.0	Peak	Vertical
	8191.0	32.3	12.3	44.6	54.0	-9.4	Peak	Vertical
*	8709.5	33.1	13.0	46.1	68.2	-22.1	Peak	Vertical
*	9704.0	34.1	14.3	48.4	68.2	-19.8	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3	Test Channel:	54
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7502.5	32.2	11.7	43.9	54.0	-10.1	Peak	Horizontal
	8242.0	31.9	12.3	44.2	54.0	-9.8	Peak	Horizontal
*	8769.0	31.4	13.2	44.6	68.2	-23.6	Peak	Horizontal
*	9746.5	32.9	14.4	47.3	68.2	-20.9	Peak	Horizontal
	7570.5	31.7	11.8	43.5	54.0	-10.5	Peak	Vertical
	8276.0	31.7	12.4	44.1	54.0	-9.9	Peak	Vertical
*	8786.0	31.5	13.2	44.7	68.2	-23.5	Peak	Vertical
*	9687.0	32.7	14.2	46.9	68.2	-21.3	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)





Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2019/12/12
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3	Test Channel:	62
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7468.5	33.5	11.6	45.1	54.0	-8.9	Peak	Horizontal
	8327.0	32.2	12.4	44.6	54.0	-9.4	Peak	Horizontal
*	8794.5	33.0	13.2	46.2	68.2	-22.0	Peak	Horizontal
*	9772.0	33.4	14.5	47.9	68.2	-20.3	Peak	Horizontal
	7570.5	31.2	11.8	43.0	54.0	-11.0	Peak	Vertical
	8276.0	32.3	12.4	44.7	54.0	-9.3	Peak	Vertical
*	8735.0	32.3	13.1	45.4	68.2	-22.8	Peak	Vertical
*	9763.5	35.1	14.5	49.6	68.2	-18.6	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2019/12/12
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3	Test Channel:	102
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7604.5	32.6	11.8	44.4	54.0	-9.6	Peak	Horizontal
	8242.0	32.5	12.3	44.8	54.0	-9.2	Peak	Horizontal
*	8828.5	31.6	13.3	44.9	68.2	-23.3	Peak	Horizontal
*	9899.5	32.8	14.9	47.7	68.2	-20.5	Peak	Horizontal
	7570.5	32.9	11.8	44.7	54.0	-9.3	Peak	Vertical
	8242.0	33.7	12.3	46.0	54.0	-8.0	Peak	Vertical
*	8752.0	33.1	13.1	46.2	68.2	-22.0	Peak	Vertical
*	9636.0	34.1	14.1	48.2	68.2	-20.0	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2019/12/12
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3	Test Channel:	118
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7536.5	32.7	11.8	44.5	54.0	-9.5	Peak	Horizontal
	8310.0	32.8	12.4	45.2	54.0	-8.8	Peak	Horizontal
*	8735.0	31.8	13.1	44.9	68.2	-23.3	Peak	Horizontal
*	10273.5	33.1	16.1	49.2	68.2	-19.0	Peak	Horizontal
	7468.5	32.4	11.6	44.0	54.0	-10.0	Peak	Vertical
	8242.0	31.9	12.3	44.2	54.0	-9.8	Peak	Vertical
*	8828.5	31.6	13.3	44.9	68.2	-23.3	Peak	Vertical
*	9721.0	33.7	14.3	48.0	68.2	-20.2	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2019/12/12
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3	Test Channel:	134
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7477.0	34.1	11.7	45.8	54.0	-8.2	Peak	Horizontal
	8327.0	32.6	12.4	45.0	54.0	-9.0	Peak	Horizontal
*	8658.5	32.8	12.9	45.7	68.2	-22.5	Peak	Horizontal
*	10375.5	32.8	16.5	49.3	68.2	-18.9	Peak	Horizontal
	7502.5	33.4	11.7	45.1	54.0	-8.9	Peak	Vertical
	8225.0	35.0	12.3	47.3	54.0	-6.7	Peak	Vertical
*	8735.0	33.1	13.1	46.2	68.2	-22.0	Peak	Vertical
*	10299.0	33.0	16.2	49.2	68.2	-19.0	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2019/12/12
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3	Test Channel:	142
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7511.0	32.1	11.7	43.8	54.0	-10.2	Peak	Horizontal
	8301.5	31.4	12.4	43.8	54.0	-10.2	Peak	Horizontal
*	8862.5	31.6	13.4	45.0	68.2	-23.2	Peak	Horizontal
*	9755.0	34.1	14.5	48.6	68.2	-19.6	Peak	Horizontal
	7570.5	32.6	11.8	44.4	54.0	-9.6	Peak	Vertical
	8276.0	32.5	12.4	44.9	54.0	-9.1	Peak	Vertical
*	8879.5	32.6	13.5	46.1	68.2	-22.1	Peak	Vertical
*	9721.0	34.3	14.3	48.6	68.2	-19.6	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2019/12/12
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3	Test Channel:	151
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7528.0	33.7	11.7	45.4	54.0	-8.6	Peak	Horizontal
	8310.0	31.5	12.4	43.9	54.0	-10.1	Peak	Horizontal
*	8692.5	31.4	13.0	44.4	68.2	-23.8	Peak	Horizontal
*	9976.0	32.1	15.2	47.3	68.2	-20.9	Peak	Horizontal
	7647.0	33.1	11.9	45.0	54.0	-9.0	Peak	Vertical
	8208.0	32.3	12.3	44.6	54.0	-9.4	Peak	Vertical
*	8990.0	32.1	13.8	45.9	68.2	-22.3	Peak	Vertical
*	9619.0	34.4	14.0	48.4	68.2	-19.8	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2019/12/12
Test Mode:	802.11ac-VHT40 - Ant 0 + 1 + 2 + 3	Test Channel:	159
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7638.5	32.3	11.9	44.2	54.0	-9.8	Peak	Horizontal
	8174.0	32.9	12.3	45.2	54.0	-8.8	Peak	Horizontal
*	8811.5	32.6	13.3	45.9	68.2	-22.3	Peak	Horizontal
*	10367.0	33.0	16.4	49.4	68.2	-18.8	Peak	Horizontal
	7545.0	32.7	11.8	44.5	54.0	-9.5	Peak	Vertical
	8242.0	33.2	12.3	45.5	54.0	-8.5	Peak	Vertical
*	8879.5	32.6	13.5	46.1	68.2	-22.1	Peak	Vertical
*	10188.5	33.0	15.9	48.9	68.2	-19.3	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ac-VHT80 - Ant 0 + 1 + 2 + 3	Test Channel:	42
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7638.5	32.2	11.9	44.1	54.0	-9.9	Peak	Horizontal
	8259.0	33.7	12.3	46.0	54.0	-8.0	Peak	Horizontal
*	8803.0	32.8	13.3	46.1	68.2	-22.1	Peak	Horizontal
*	9746.5	33.9	14.4	48.3	68.2	-19.9	Peak	Horizontal
	7536.5	33.5	11.8	45.3	54.0	-8.7	Peak	Vertical
	8318.5	32.4	12.4	44.8	54.0	-9.2	Peak	Vertical
*	8803.0	31.6	13.3	44.9	68.2	-23.3	Peak	Vertical
*	9712.5	34.3	14.3	48.6	68.2	-19.6	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)





Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ac-VHT80 - Ant 0 + 1 + 2 + 3	Test Channel:	58
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7443.0	33.1	11.6	44.7	54.0	-9.3	Peak	Horizontal
	8242.0	33.3	12.3	45.6	54.0	-8.4	Peak	Horizontal
*	8726.5	32.5	13.1	45.6	68.2	-22.6	Peak	Horizontal
*	9738.0	34.6	14.4	49.0	68.2	-19.2	Peak	Horizontal
	7613.0	32.7	11.8	44.5	54.0	-9.5	Peak	Vertical
	8174.0	32.6	12.3	44.9	54.0	-9.1	Peak	Vertical
*	8811.5	32.8	13.3	46.1	68.2	-22.1	Peak	Vertical
*	10163.0	33.2	15.8	49.0	68.2	-19.2	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ac-VHT80 - Ant 0 + 1 + 2 + 3	Test Channel:	106
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7553.5	33.1	11.8	44.9	54.0	-9.1	Peak	Horizontal
	8242.0	33.0	12.3	45.3	54.0	-8.7	Peak	Horizontal
*	8735.0	32.5	13.1	45.6	68.2	-22.6	Peak	Horizontal
*	9831.5	33.6	14.7	48.3	68.2	-19.9	Peak	Horizontal
	7545.0	33.0	11.8	44.8	54.0	-9.2	Peak	Vertical
	8301.5	32.4	12.4	44.8	54.0	-9.2	Peak	Vertical
*	8735.0	32.3	13.1	45.4	68.2	-22.8	Peak	Vertical
*	9763.5	35.3	14.5	49.8	68.2	-18.4	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ac-VHT80 - Ant 0 + 1 + 2 + 3	Test Channel:	122
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7604.5	32.2	11.8	44.0	54.0	-10.0	Peak	Horizontal
	8284.5	33.4	12.4	45.8	54.0	-8.2	Peak	Horizontal
*	8854.0	32.2	13.4	45.6	68.2	-22.6	Peak	Horizontal
*	9695.5	34.4	14.3	48.7	68.2	-19.5	Peak	Horizontal
	7613.0	33.4	11.8	45.2	54.0	-8.8	Peak	Vertical
	8395.0	32.8	12.4	45.2	54.0	-8.8	Peak	Vertical
*	8828.5	32.1	13.3	45.4	68.2	-22.8	Peak	Vertical
*	10001.5	32.4	15.3	47.7	68.2	-20.5	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ac-VHT80 - Ant 0 + 1 + 2 + 3	Test Channel:	138
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7519.5	33.4	11.7	45.1	54.0	-8.9	Peak	Horizontal
	8242.0	33.2	12.3	45.5	54.0	-8.5	Peak	Horizontal
*	8692.5	32.9	13.0	45.9	68.2	-22.3	Peak	Horizontal
*	10290.5	32.8	16.2	49.0	68.2	-19.2	Peak	Horizontal
	7579.0	32.7	11.8	44.5	54.0	-9.5	Peak	Vertical
	8242.0	33.0	12.3	45.3	54.0	-8.7	Peak	Vertical
*	8692.5	32.2	13.0	45.2	68.2	-23.0	Peak	Vertical
*	10299.0	32.7	16.2	48.9	68.2	-19.3	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ac-VHT80 - Ant 0 + 1 + 2 + 3	Test Channel:	155
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7545.0	32.9	11.8	44.7	54.0	-9.3	Peak	Horizontal
	8250.5	33.3	12.3	45.6	54.0	-8.4	Peak	Horizontal
*	8811.5	31.4	13.3	44.7	68.2	-23.5	Peak	Horizontal
*	9772.0	33.3	14.5	47.8	68.2	-20.4	Peak	Horizontal
	7477.0	33.2	11.7	44.9	54.0	-9.1	Peak	Vertical
	8335.5	33.9	12.4	46.3	54.0	-7.7	Peak	Vertical
*	8777.5	33.0	13.2	46.2	68.2	-22.0	Peak	Vertical
*	9772.0	34.1	14.5	48.6	68.2	-19.6	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ac-VHT160 - Ant 0 + 1 + 2 + 3	Test Channel:	50
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7570.5	33.5	11.8	45.3	54.0	-8.7	Peak	Horizontal
	8276.0	31.8	12.4	44.2	54.0	-9.8	Peak	Horizontal
*	8752.0	32.5	13.1	45.6	68.2	-22.6	Peak	Horizontal
*	10010.0	32.6	15.3	47.9	68.2	-20.3	Peak	Horizontal
	7502.5	33.0	11.7	44.7	54.0	-9.3	Peak	Vertical
	8165.5	33.0	12.3	45.3	54.0	-8.7	Peak	Vertical
*	8769.0	33.5	13.2	46.7	68.2	-21.5	Peak	Vertical
*	10137.5	33.0	15.7	48.7	68.2	-19.5	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ac-VHT160 - Ant 0 + 1 + 2 + 3	Test Channel:	114
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7528.0	33.5	11.7	45.2	54.0	-8.8	Peak	Horizontal
	8284.5	33.4	12.4	45.8	54.0	-8.2	Peak	Horizontal
*	8811.5	32.3	13.3	45.6	68.2	-22.6	Peak	Horizontal
*	10103.5	34.2	15.6	49.8	68.2	-18.4	Peak	Horizontal
	7468.5	32.7	11.6	44.3	54.0	-9.7	Peak	Vertical
	8301.5	32.9	12.4	45.3	54.0	-8.7	Peak	Vertical
*	8735.0	32.3	13.1	45.4	68.2	-22.8	Peak	Vertical
*	9806.0	33.7	14.6	48.3	68.2	-19.9	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3	Test Channel:	36
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7502.5	33.2	11.7	44.9	54.0	-9.1	Peak	Horizontal
	8267.5	33.2	12.4	45.6	54.0	-8.4	Peak	Horizontal
*	8811.5	32.1	13.3	45.4	68.2	-22.8	Peak	Horizontal
*	9823.0	33.1	14.7	47.8	68.2	-20.4	Peak	Horizontal
	7570.5	33.6	11.8	45.4	54.0	-8.6	Peak	Vertical
	8208.0	33.5	12.3	45.8	54.0	-8.2	Peak	Vertical
*	8854.0	32.4	13.4	45.8	68.2	-22.4	Peak	Vertical
*	9916.5	33.1	15.0	48.1	68.2	-20.1	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)





Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3	Test Channel:	44
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7698.0	34.3	11.9	46.2	54.0	-7.8	Peak	Horizontal
	8131.5	33.4	12.3	45.7	54.0	-8.3	Peak	Horizontal
*	8811.5	31.7	13.3	45.0	68.2	-23.2	Peak	Horizontal
*	9789.0	33.8	14.6	48.4	68.2	-19.8	Peak	Horizontal
	7536.5	33.0	11.8	44.8	54.0	-9.2	Peak	Vertical
	8250.5	33.9	12.3	46.2	54.0	-7.8	Peak	Vertical
*	8743.5	33.0	13.1	46.1	68.2	-22.1	Peak	Vertical
*	9712.5	34.6	14.3	48.9	68.2	-19.3	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3	Test Channel:	48
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7468.5	32.6	11.6	44.2	54.0	-9.8	Peak	Horizontal
	8242.0	33.2	12.3	45.5	54.0	-8.5	Peak	Horizontal
*	8777.5	33.9	13.2	47.1	68.2	-21.1	Peak	Horizontal
*	9857.0	34.1	14.8	48.9	68.2	-19.3	Peak	Horizontal
	7536.5	33.3	11.8	45.1	54.0	-8.9	Peak	Vertical
	8310.0	32.2	12.4	44.6	54.0	-9.4	Peak	Vertical
*	8777.5	31.3	13.2	44.5	68.2	-23.7	Peak	Vertical
*	9619.0	33.3	14.0	47.3	68.2	-20.9	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2019/12/12
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3	Test Channel:	52
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7434.5	32.8	11.6	44.4	54.0	-9.6	Peak	Horizontal
	8199.5	33.6	12.3	45.9	54.0	-8.1	Peak	Horizontal
*	8675.5	34.5	12.9	47.4	68.2	-20.8	Peak	Horizontal
*	9772.0	34.5	14.5	49.0	68.2	-19.2	Peak	Horizontal
	7613.0	32.2	11.8	44.0	54.0	-10.0	Peak	Vertical
	8378.0	33.1	12.4	45.5	54.0	-8.5	Peak	Vertical
*	8837.0	32.1	13.3	45.4	68.2	-22.8	Peak	Vertical
*	10358.5	33.5	16.4	49.9	68.2	-18.3	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2019/12/12
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3	Test Channel:	60
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7536.5	33.9	11.8	45.7	54.0	-8.3	Peak	Horizontal
	8208.0	32.2	12.3	44.5	54.0	-9.5	Peak	Horizontal
*	8752.0	32.1	13.1	45.2	68.2	-23.0	Peak	Horizontal
*	9763.5	34.1	14.5	48.6	68.2	-19.6	Peak	Horizontal
	7375.0	31.6	11.4	43.0	54.0	-11.0	Peak	Vertical
	8327.0	33.0	12.4	45.4	54.0	-8.6	Peak	Vertical
*	8692.5	32.4	13.0	45.4	68.2	-22.8	Peak	Vertical
*	10146.0	32.6	15.7	48.3	68.2	-19.9	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2019/12/12
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3	Test Channel:	64
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7502.5	32.6	11.7	44.3	54.0	-9.7	Peak	Horizontal
	8250.5	32.2	12.3	44.5	54.0	-9.5	Peak	Horizontal
*	8735.0	32.7	13.1	45.8	68.2	-22.4	Peak	Horizontal
*	9984.5	31.9	15.2	47.1	68.2	-21.1	Peak	Horizontal
	7562.0	33.9	11.8	45.7	54.0	-8.3	Peak	Vertical
	8106.0	33.7	12.3	46.0	54.0	-8.0	Peak	Vertical
*	8692.5	33.1	13.0	46.1	68.2	-22.1	Peak	Vertical
*	10146.0	32.6	15.7	48.3	68.2	-19.9	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2019/12/12
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3	Test Channel:	100
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7570.5	33.4	11.8	45.2	54.0	-8.8	Peak	Horizontal
	8165.5	33.1	12.3	45.4	54.0	-8.6	Peak	Horizontal
*	8769.0	32.3	13.2	45.5	68.2	-22.7	Peak	Horizontal
*	10103.5	34.3	15.6	49.9	68.2	-18.3	Peak	Horizontal
	7570.5	32.8	11.8	44.6	54.0	-9.4	Peak	Vertical
	8276.0	33.1	12.4	45.5	54.0	-8.5	Peak	Vertical
*	8811.5	31.6	13.3	44.9	68.2	-23.3	Peak	Vertical
*	10248.0	32.3	16.1	48.4	68.2	-19.8	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2019/12/12
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3	Test Channel:	120
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7621.5	33.8	11.8	45.6	54.0	-8.4	Peak	Horizontal
	8233.5	34.2	12.3	46.5	54.0	-7.5	Peak	Horizontal
*	8896.5	32.9	13.5	46.4	68.2	-21.8	Peak	Horizontal
*	10214.0	33.6	15.9	49.5	68.2	-18.7	Peak	Horizontal
	7511.0	32.8	11.7	44.5	54.0	-9.5	Peak	Vertical
	8242.0	32.5	12.3	44.8	54.0	-9.2	Peak	Vertical
*	8811.5	31.7	13.3	45.0	68.2	-23.2	Peak	Vertical
*	9729.5	33.3	14.4	47.7	68.2	-20.5	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2019/12/12
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3	Test Channel:	140
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7604.5	31.9	11.8	43.7	54.0	-10.3	Peak	Horizontal
	8199.5	32.9	12.3	45.2	54.0	-8.8	Peak	Horizontal
*	8735.0	32.9	13.1	46.0	68.2	-22.2	Peak	Horizontal
*	9882.5	33.7	14.9	48.6	68.2	-19.6	Peak	Horizontal
	7545.0	34.1	11.8	45.9	54.0	-8.1	Peak	Vertical
	8276.0	33.6	12.4	46.0	54.0	-8.0	Peak	Vertical
*	8777.5	33.0	13.2	46.2	68.2	-22.0	Peak	Vertical
*	9772.0	35.1	14.5	49.6	68.2	-18.6	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)





Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2019/12/12
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3	Test Channel:	144
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7647.0	32.6	11.9	44.5	54.0	-9.5	Peak	Horizontal
	8242.0	32.8	12.3	45.1	54.0	-8.9	Peak	Horizontal
*	8743.5	32.7	13.1	45.8	68.2	-22.4	Peak	Horizontal
*	10214.0	32.7	15.9	48.6	68.2	-19.6	Peak	Horizontal
	7468.5	33.1	11.6	44.7	54.0	-9.3	Peak	Vertical
	8276.0	32.9	12.4	45.3	54.0	-8.7	Peak	Vertical
*	8811.5	32.5	13.3	45.8	68.2	-22.4	Peak	Vertical
*	9780.5	33.9	14.5	48.4	68.2	-19.8	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3	Test Channel:	149
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7587.5	33.7	11.8	45.5	54.0	-8.5	Peak	Horizontal
	8429.0	30.4	12.4	42.8	54.0	-11.2	Peak	Horizontal
*	8998.5	32.9	13.8	46.7	68.2	-21.5	Peak	Horizontal
*	10358.5	33.2	16.4	49.6	68.2	-18.6	Peak	Horizontal
	7681.0	33.8	11.9	45.7	54.0	-8.3	Peak	Vertical
	8318.5	34.0	12.4	46.4	54.0	-7.6	Peak	Vertical
*	8735.0	33.7	13.1	46.8	68.2	-21.4	Peak	Vertical
*	10078.0	33.1	15.5	48.6	68.2	-19.6	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3	Test Channel:	157
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7494.0	34.1	11.7	45.8	54.0	-8.2	Peak	Horizontal
	8497.0	32.8	12.5	45.3	54.0	-8.7	Peak	Horizontal
*	8735.0	32.6	13.1	45.7	68.2	-22.5	Peak	Horizontal
*	9789.0	33.4	14.6	48.0	68.2	-20.2	Peak	Horizontal
	7664.0	34.4	11.9	46.3	54.0	-7.7	Peak	Vertical
	8182.5	33.8	12.3	46.1	54.0	-7.9	Peak	Vertical
*	8888.0	33.4	13.5	46.9	68.2	-21.3	Peak	Vertical
*	10290.5	33.1	16.2	49.3	68.2	-18.9	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ax-HE20 - Ant 0 + 1 + 2 + 3	Test Channel:	165
Remark:	<ol style="list-style-type: none"> <li>1. Average measurement was not performed if peak level lower than average limit.</li> <li>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.</li> </ol>		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7477.0	33.5	11.7	45.2	54.0	-8.8	Peak	Horizontal
	8318.5	33.8	12.4	46.2	54.0	-7.8	Peak	Horizontal
*	8701.0	32.7	13.0	45.7	68.2	-22.5	Peak	Horizontal
*	9772.0	34.8	14.5	49.3	68.2	-18.9	Peak	Horizontal
	7511.0	33.6	11.7	45.3	54.0	-8.7	Peak	Vertical
	8310.0	32.8	12.4	45.2	54.0	-8.8	Peak	Vertical
*	8769.0	31.8	13.2	45.0	68.2	-23.2	Peak	Vertical
*	10324.5	33.4	16.3	49.7	68.2	-18.5	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3	Test Channel:	38
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7655.5	33.2	11.9	45.1	54.0	-8.9	Peak	Horizontal
	8165.5	33.5	12.3	45.8	54.0	-8.2	Peak	Horizontal
*	8803.0	32.3	13.3	45.6	68.2	-22.6	Peak	Horizontal
*	9899.5	30.9	14.9	45.8	68.2	-22.4	Peak	Horizontal
	7570.5	34.6	11.8	46.4	54.0	-7.6	Peak	Vertical
	8395.0	33.4	12.4	45.8	54.0	-8.2	Peak	Vertical
*	8743.5	33.1	13.1	46.2	68.2	-22.0	Peak	Vertical
*	10214.0	33.0	15.9	48.9	68.2	-19.3	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3	Test Channel:	46
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7545.0	34.6	11.8	46.4	54.0	-7.6	Peak	Horizontal
	8242.0	32.4	12.3	44.7	54.0	-9.3	Peak	Horizontal
*	8769.0	32.8	13.2	46.0	68.2	-22.2	Peak	Horizontal
*	9738.0	33.6	14.4	48.0	68.2	-20.2	Peak	Horizontal
	7494.0	34.8	11.7	46.5	54.0	-7.5	Peak	Vertical
	8352.5	32.8	12.4	45.2	54.0	-8.8	Peak	Vertical
*	8743.5	32.5	13.1	45.6	68.2	-22.6	Peak	Vertical
*	10358.5	33.6	16.4	50.0	68.2	-18.2	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3	Test Channel:	54
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7502.5	34.0	11.7	45.7	54.0	-8.3	Peak	Horizontal
	8174.0	32.9	12.3	45.2	54.0	-8.8	Peak	Horizontal
*	8769.0	31.8	13.2	45.0	68.2	-23.2	Peak	Horizontal
*	9814.5	32.5	14.7	47.2	68.2	-21.0	Peak	Horizontal
	7468.5	32.8	11.6	44.4	54.0	-9.6	Peak	Vertical
	8242.0	32.8	12.3	45.1	54.0	-8.9	Peak	Vertical
*	8769.0	32.6	13.2	45.8	68.2	-22.4	Peak	Vertical
*	10324.5	32.9	16.3	49.2	68.2	-19.0	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2019/12/12
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3	Test Channel:	62
Remark:	<ol style="list-style-type: none"> <li>1. Average measurement was not performed if peak level lower than average limit.</li> <li>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.</li> </ol>		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7638.5	33.4	11.9	45.3	54.0	-8.7	Peak	Horizontal
	8242.0	33.4	12.3	45.7	54.0	-8.3	Peak	Horizontal
*	8658.5	33.5	12.9	46.4	68.2	-21.8	Peak	Horizontal
*	9763.5	34.2	14.5	48.7	68.2	-19.5	Peak	Horizontal
	7485.5	33.4	11.7	45.1	54.0	-8.9	Peak	Vertical
	8318.5	32.3	12.4	44.7	54.0	-9.3	Peak	Vertical
*	8862.5	31.9	13.4	45.3	68.2	-22.9	Peak	Vertical
*	9772.0	34.4	14.5	48.9	68.2	-19.3	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2019/12/12
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3	Test Channel:	102
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7604.5	32.8	11.8	44.6	54.0	-9.4	Peak	Horizontal
	8284.5	33.6	12.4	46.0	54.0	-8.0	Peak	Horizontal
*	8905.0	32.5	13.5	46.0	68.2	-22.2	Peak	Horizontal
*	10282.0	33.7	16.2	49.9	68.2	-18.3	Peak	Horizontal
	7494.0	34.1	11.7	45.8	54.0	-8.2	Peak	Vertical
	8233.5	33.3	12.3	45.6	54.0	-8.4	Peak	Vertical
*	8820.0	32.6	13.3	45.9	68.2	-22.3	Peak	Vertical
*	10112.0	32.7	15.6	48.3	68.2	-19.9	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2019/12/12
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3	Test Channel:	118
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7477.0	33.1	11.7	44.8	54.0	-9.2	Peak	Horizontal
	8242.0	33.6	12.3	45.9	54.0	-8.1	Peak	Horizontal
*	8701.0	32.8	13.0	45.8	68.2	-22.4	Peak	Horizontal
*	10316.0	32.6	16.3	48.9	68.2	-19.3	Peak	Horizontal
	7545.0	33.5	11.8	45.3	54.0	-8.7	Peak	Vertical
	8199.5	32.2	12.3	44.5	54.0	-9.5	Peak	Vertical
*	8811.5	31.0	13.3	44.3	68.2	-23.9	Peak	Vertical
*	10112.0	33.5	15.6	49.1	68.2	-19.1	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2019/12/12
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3	Test Channel:	134
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7477.0	35.4	11.7	47.1	54.0	-6.9	Peak	Horizontal
	8344.0	33.7	12.4	46.1	54.0	-7.9	Peak	Horizontal
*	8735.0	33.5	13.1	46.6	68.2	-21.6	Peak	Horizontal
*	9687.0	34.0	14.2	48.2	68.2	-20.0	Peak	Horizontal
	7613.0	34.0	11.8	45.8	54.0	-8.2	Peak	Vertical
	8199.5	32.7	12.3	45.0	54.0	-9.0	Peak	Vertical
*	8743.5	33.3	13.1	46.4	68.2	-21.8	Peak	Vertical
*	9746.5	35.1	14.4	49.5	68.2	-18.7	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2019/12/12
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3	Test Channel:	142
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7621.5	33.4	11.8	45.2	54.0	-8.8	Peak	Horizontal
	8242.0	34.3	12.3	46.6	54.0	-7.4	Peak	Horizontal
*	9763.5	34.1	14.5	48.6	68.2	-19.6	Peak	Horizontal
*	10367.0	33.1	16.4	49.5	68.2	-18.7	Peak	Horizontal
	7587.5	34.5	11.8	46.3	54.0	-7.7	Peak	Vertical
	8250.5	32.8	12.3	45.1	54.0	-8.9	Peak	Vertical
*	8828.5	32.5	13.3	45.8	68.2	-22.4	Peak	Vertical
*	9780.5	34.4	14.5	48.9	68.2	-19.3	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2019/12/12
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3	Test Channel:	151
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7502.5	33.8	11.7	45.5	54.0	-8.5	Peak	Horizontal
	8250.5	32.9	12.3	45.2	54.0	-8.8	Peak	Horizontal
*	8735.0	32.4	13.1	45.5	68.2	-22.7	Peak	Horizontal
*	9704.0	34.2	14.3	48.5	68.2	-19.7	Peak	Horizontal
	7494.0	34.8	11.7	46.5	54.0	-7.5	Peak	Vertical
	8378.0	33.1	12.4	45.5	54.0	-8.5	Peak	Vertical
*	8837.0	32.1	13.3	45.4	68.2	-22.8	Peak	Vertical
*	9729.5	34.6	14.4	49.0	68.2	-19.2	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2019/12/12
Test Mode:	802.11ax-HE40 - Ant 0 + 1 + 2 + 3	Test Channel:	159
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7502.5	33.7	11.7	45.4	54.0	-8.6	Peak	Horizontal
	8276.0	33.1	12.4	45.5	54.0	-8.5	Peak	Horizontal
*	8964.5	33.8	13.7	47.5	68.2	-20.7	Peak	Horizontal
*	9695.5	34.7	14.3	49.0	68.2	-19.2	Peak	Horizontal
	7596.0	34.1	11.8	45.9	54.0	-8.1	Peak	Vertical
	8191.0	33.5	12.3	45.8	54.0	-8.2	Peak	Vertical
*	8709.5	33.1	13.0	46.1	68.2	-22.1	Peak	Vertical
*	10095.0	33.0	15.6	48.6	68.2	-19.6	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ax-HE80 - Ant 0 + 1 + 2 + 3	Test Channel:	42
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7485.5	32.9	11.7	44.6	54.0	-9.4	Peak	Horizontal
	8276.0	31.2	12.4	43.6	54.0	-10.4	Peak	Horizontal
*	8743.5	31.9	13.1	45.0	68.2	-23.2	Peak	Horizontal
*	10290.5	31.2	16.2	47.4	68.2	-20.8	Peak	Horizontal
	7545.0	31.9	11.8	43.7	54.0	-10.3	Peak	Vertical
	8344.0	32.1	12.4	44.5	54.0	-9.5	Peak	Vertical
*	8811.5	31.1	13.3	44.4	68.2	-23.8	Peak	Vertical
*	10265.0	32.8	16.1	48.9	68.2	-19.3	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ax-HE80 - Ant 0 + 1 + 2 + 3	Test Channel:	58
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7545.0	32.3	11.8	44.1	54.0	-9.9	Peak	Horizontal
	8191.0	32.0	12.3	44.3	54.0	-9.7	Peak	Horizontal
*	8692.5	31.9	13.0	44.9	68.2	-23.3	Peak	Horizontal
*	9865.5	33.3	14.8	48.1	68.2	-20.1	Peak	Horizontal
	7443.0	32.3	11.6	43.9	54.0	-10.1	Peak	Vertical
	8242.0	32.0	12.3	44.3	54.0	-9.7	Peak	Vertical
*	9763.5	33.2	14.5	47.7	68.2	-20.5	Peak	Vertical
*	10035.5	29.8	15.4	45.2	68.2	-23.0	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ax-HE80 - Ant 0 + 1 + 2 + 3	Test Channel:	106
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7545.0	32.4	11.8	44.2	54.0	-9.8	Peak	Horizontal
	8276.0	32.1	12.4	44.5	54.0	-9.5	Peak	Horizontal
*	8777.5	31.6	13.2	44.8	68.2	-23.4	Peak	Horizontal
*	10282.0	31.5	16.2	47.7	68.2	-20.5	Peak	Horizontal
	7638.5	32.5	11.9	44.4	54.0	-9.6	Peak	Vertical
	8242.0	32.3	12.3	44.6	54.0	-9.4	Peak	Vertical
*	8769.0	32.1	13.2	45.3	68.2	-22.9	Peak	Vertical
*	9670.0	33.0	14.2	47.2	68.2	-21.0	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ax-HE80 - Ant 0 + 1 + 2 + 3	Test Channel:	122
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7630.0	33.5	11.8	45.3	54.0	-8.7	Peak	Horizontal
	8233.5	32.2	12.3	44.5	54.0	-9.5	Peak	Horizontal
*	8718.0	32.0	13.0	45.0	68.2	-23.2	Peak	Horizontal
*	9976.0	32.2	15.2	47.4	68.2	-20.8	Peak	Horizontal
	7570.5	31.8	11.8	43.6	54.0	-10.4	Peak	Vertical
	8301.5	31.7	12.4	44.1	54.0	-9.9	Peak	Vertical
*	8743.5	32.2	13.1	45.3	68.2	-22.9	Peak	Vertical
*	9959.0	32.2	15.1	47.3	68.2	-20.9	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ax-HE80 - Ant 0 + 1 + 2 + 3	Test Channel:	138
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7587.5	33.2	11.8	45.0	54.0	-9.0	Peak	Horizontal
	8310.0	31.8	12.4	44.2	54.0	-9.8	Peak	Horizontal
*	8794.5	31.2	13.2	44.4	68.2	-23.8	Peak	Horizontal
*	9678.5	32.3	14.2	46.5	68.2	-21.7	Peak	Horizontal
	7553.5	32.9	11.8	44.7	54.0	-9.3	Peak	Vertical
	8361.0	31.6	12.4	44.0	54.0	-10.0	Peak	Vertical
*	8692.5	33.2	13.0	46.2	68.2	-22.0	Peak	Vertical
*	9738.0	32.9	14.4	47.3	68.2	-20.9	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ax-HE80 - Ant 0 + 1 + 2 + 3	Test Channel:	155
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7587.5	33.4	11.8	45.2	54.0	-8.8	Peak	Horizontal
	8216.5	32.3	12.3	44.6	54.0	-9.4	Peak	Horizontal
*	8735.0	31.7	13.1	44.8	68.2	-23.4	Peak	Horizontal
*	9712.5	33.4	14.3	47.7	68.2	-20.5	Peak	Horizontal
	7468.5	33.3	11.6	44.9	54.0	-9.1	Peak	Vertical
	8250.5	32.4	12.3	44.7	54.0	-9.3	Peak	Vertical
*	8701.0	31.9	13.0	44.9	68.2	-23.3	Peak	Vertical
*	9687.0	32.9	14.2	47.1	68.2	-21.1	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ax-HE160 - Ant 0 + 1 + 2 + 3	Test Channel:	50
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7536.5	32.8	11.8	44.6	54.0	-9.4	Peak	Horizontal
	8301.5	32.4	12.4	44.8	54.0	-9.2	Peak	Horizontal
*	8845.5	30.8	13.4	44.2	68.2	-24.0	Peak	Horizontal
*	9653.0	33.1	14.1	47.2	68.2	-21.0	Peak	Horizontal
	7536.5	31.8	11.8	43.6	54.0	-10.4	Peak	Vertical
	8446.0	31.8	12.4	44.2	54.0	-9.8	Peak	Vertical
*	8769.0	31.4	13.2	44.6	68.2	-23.6	Peak	Vertical
*	9695.5	32.5	14.3	46.8	68.2	-21.4	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kervin Ker	Relative Humidity	57 %
Test Site	AC1	Test Date	2020/03/01
Test Mode:	802.11ax-HE160 - Ant 0 + 1 + 2 + 3	Test Channel:	114
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	7536.5	33.2	11.8	45.0	54.0	-9.0	Peak	Horizontal
	8284.5	32.2	12.4	44.6	54.0	-9.4	Peak	Horizontal
*	8692.5	31.7	13.0	44.7	68.2	-23.5	Peak	Horizontal
*	10137.5	32.4	15.7	48.1	68.2	-20.1	Peak	Horizontal
	7502.5	32.5	11.7	44.2	54.0	-9.8	Peak	Vertical
	8233.5	32.2	12.3	44.5	54.0	-9.5	Peak	Vertical
*	8735.0	31.1	13.1	44.2	68.2	-24.0	Peak	Vertical
*	9721.0	32.2	14.3	46.5	68.2	-21.7	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



**Test Result of Radiated Emissions for Co-located**

Site: AC1	Time: 2020/03/06 - 13:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Note: 2.4GHz Wi-Fi & 5GHz Wi-Fi & BLE Transmit	

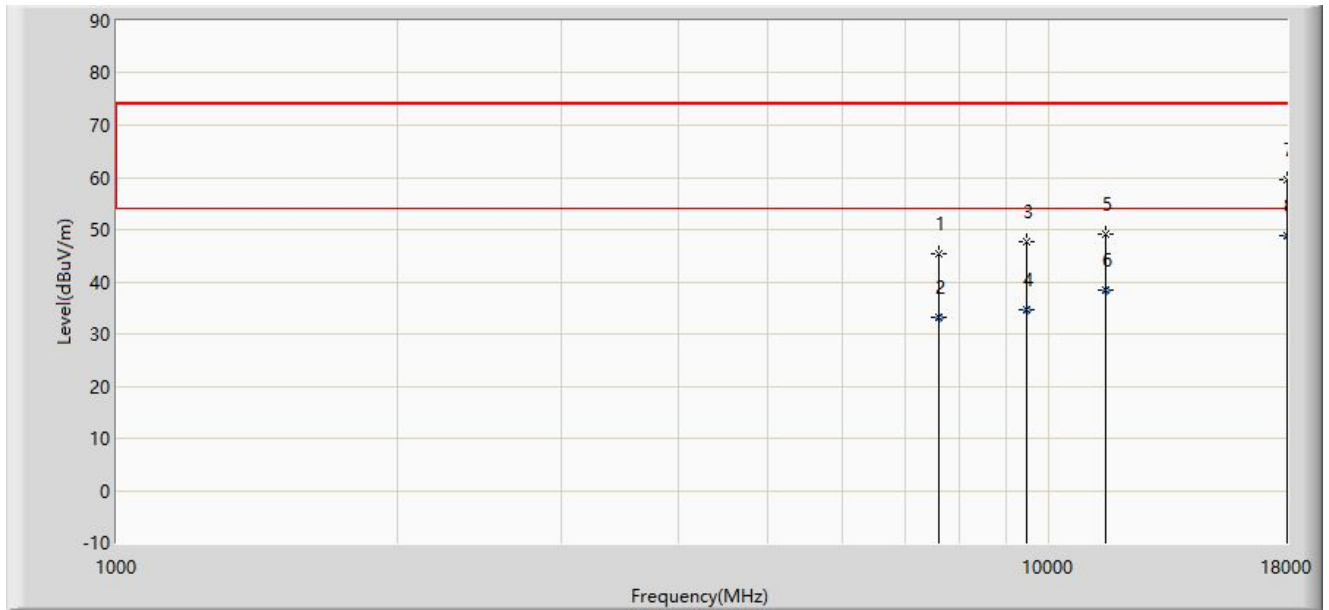

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7630.000	45.382	33.533	-28.618	74.000	11.849	PK
2			7630.000	33.309	21.460	-20.691	54.000	11.849	AV
3			9474.500	47.552	33.924	-26.448	74.000	13.629	PK
4			9474.500	34.688	21.060	-19.312	54.000	13.629	AV
5			11480.500	49.275	31.243	-24.725	74.000	18.031	PK
6			11480.500	38.522	20.490	-15.478	54.000	18.031	AV
7			18000.000	59.562	28.092	-14.438	74.000	31.470	PK
8		*	18000.000	48.700	17.230	-5.300	54.000	31.470	AV

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)


Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Note 2: We selected the 2.4GHz and 5GHz worst-case mode of radiated spurious emissions in the DTS and UNII reports.

Note 3: 2.4GHz Wi-Fi 802.11b Channel 2462MHz & 5GHz Wi-Fi 802.11ax-HE20 Channel 5300MHz & 2.4GHz Bluetooth LE channel 2480MHz



Site: AC1	Time: 2020/03/06 - 13:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Note: 2.4GHz Wi-Fi & 5GHz Wi-Fi & BLE Transmit	

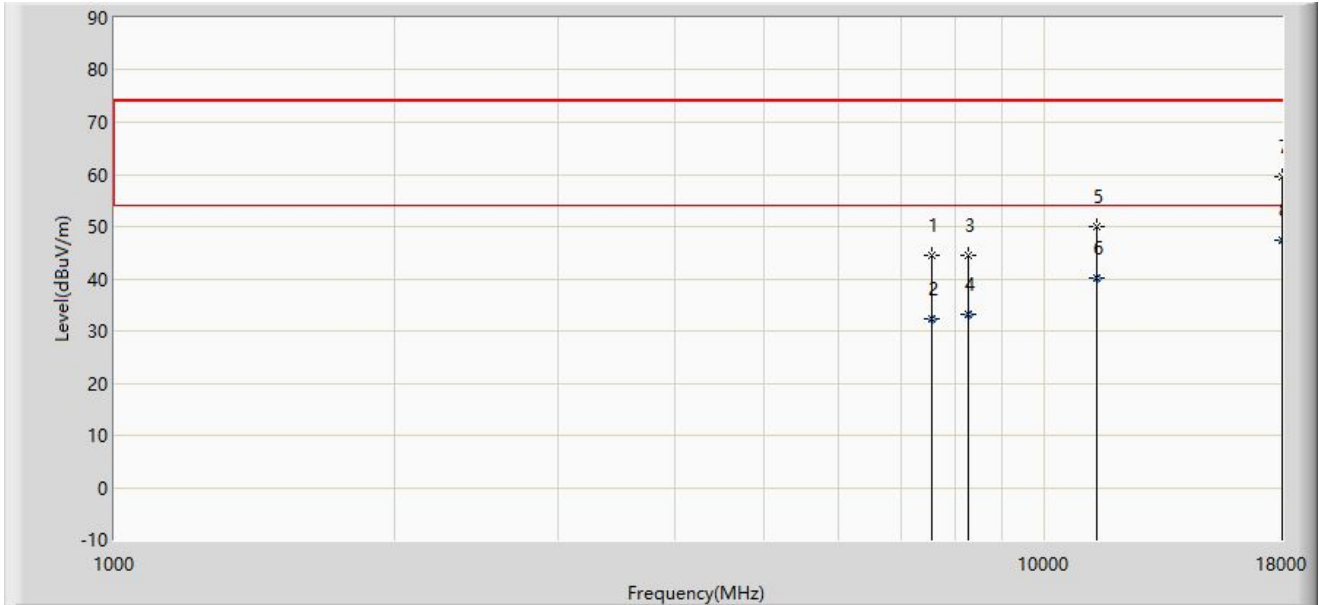

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7562.000	44.612	32.832	-29.388	74.000	11.780	PK
2			7562.000	32.370	20.590	-21.630	54.000	11.780	AV
3			8284.500	44.571	32.213	-29.429	74.000	12.358	PK
4			8284.500	33.308	20.950	-20.692	54.000	12.358	AV
5			11361.500	49.950	32.031	-24.050	74.000	17.919	PK
6			11361.500	40.099	22.180	-13.901	54.000	17.919	AV
7			18000.000	59.457	27.987	-14.543	74.000	31.470	PK
8		*	18000.000	47.260	15.790	-6.740	54.000	31.470	AV

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).


Note 2: We selected the 2.4GHz and 5GHz worst-case mode of radiated spurious emissions in the DTS and UNII reports.

Note 3: 2.4GHz Wi-Fi 802.11b Channel 2462MHz & 5GHz Wi-Fi 802.11ax-HE20 Channel 5300MHz & 2.4GHz Bluetooth LE channel 2480MHz





Site: AC1	Time: 2020/03/06 - 13:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Note: 2.4GHz Wi-Fi & 5GHz Wi-Fi & ZigBee Transmit	

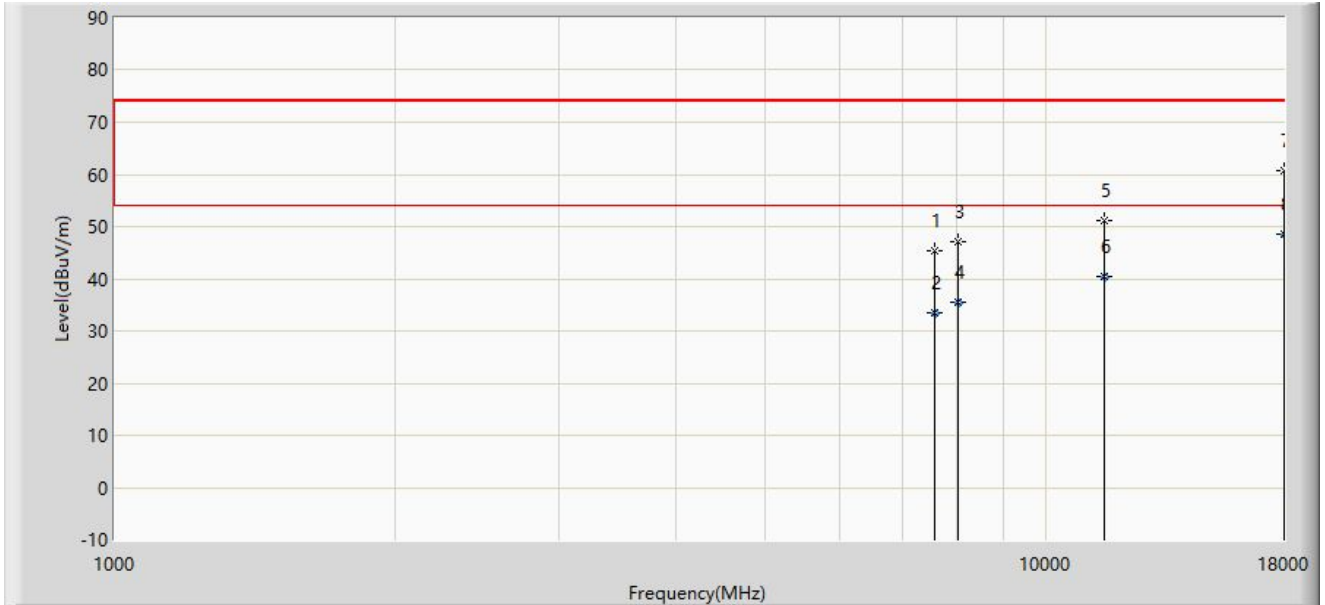

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7596.000	45.245	33.431	-28.755	74.000	11.814	PK
2			7596.000	33.404	21.590	-20.596	54.000	11.814	AV
3			8055.000	47.033	34.778	-26.967	74.000	12.255	PK
4			8055.000	35.435	23.180	-18.565	54.000	12.255	AV
5			11531.500	51.174	33.138	-22.826	74.000	18.036	PK
6			11531.500	40.486	22.450	-13.514	54.000	18.036	AV
7			18000.000	60.673	29.203	-13.327	74.000	31.470	PK
8		*	18000.000	48.420	16.950	-5.580	54.000	31.470	AV

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)


Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Note 2: We selected the 2.4GHz and 5GHz worst-case mode of radiated spurious emissions in the DTS and UNII reports.

Note 3: 2.4GHz Wi-Fi 802.11b Channel 2462MHz & 5GHz Wi-Fi 802.11ax-HE20 Channel 5300MHz & 2.4GHz ZigBee channel 2440MHz



Site: AC1	Time: 2020/03/06 - 13:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Note: 2.4GHz Wi-Fi & 5GHz Wi-Fi & ZigBee Transmit	

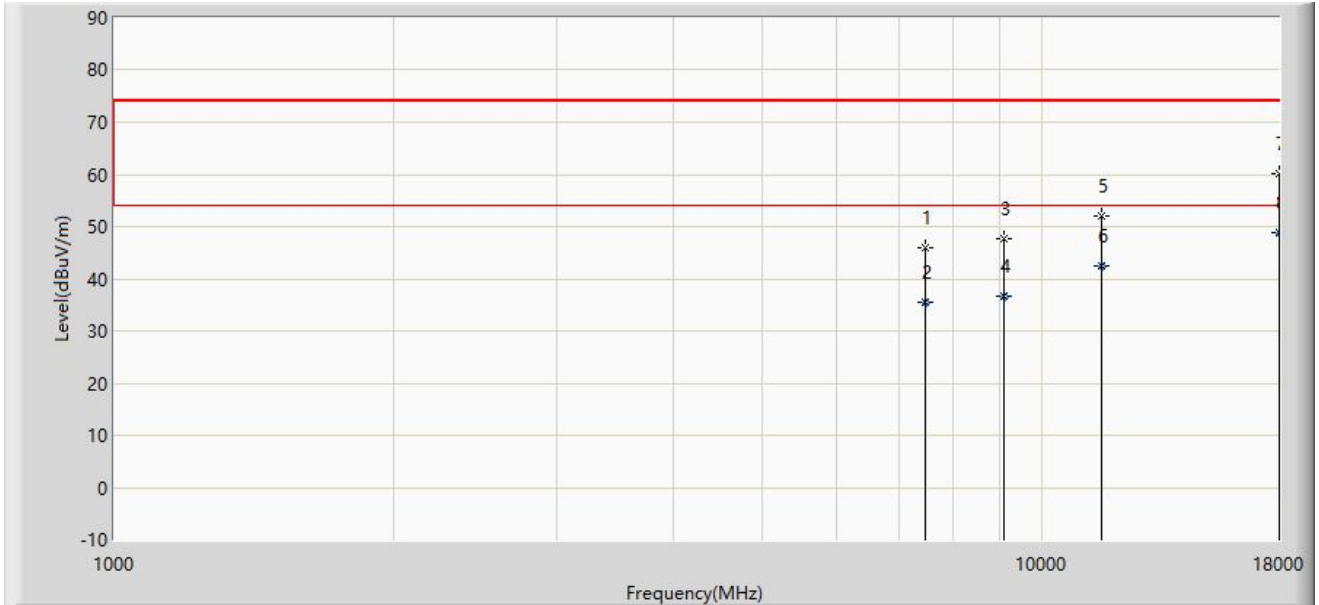

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7494.000	45.831	34.129	-28.169	74.000	11.702	PK
2			7494.000	35.392	23.690	-18.608	54.000	11.702	AV
3			9092.000	47.621	33.871	-26.379	74.000	13.750	PK
4			9092.000	36.760	23.010	-17.240	54.000	13.750	AV
5			11582.500	51.985	33.973	-22.015	74.000	18.012	PK
6			11582.500	42.352	24.340	-11.648	54.000	18.012	AV
7			18000.000	60.217	28.747	-13.783	74.000	31.470	PK
8		*	18000.000	48.720	17.250	-5.280	54.000	31.470	AV

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).


Note 2: We selected the 2.4GHz and 5GHz worst-case mode of radiated spurious emissions in the DTS and UNII reports.

Note 3: 2.4GHz Wi-Fi 802.11b Channel 2462MHz & 5GHz Wi-Fi 802.11ax-HE20 Channel 5300MHz & 2.4GHz ZigBee channel 2440MHz



**The Worst Case of Radiated Emission above 1GHz:**

Site: AC1	Time: 2020/02/26 - 16:16
Limit: FCC_Part15.209_RSE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz	

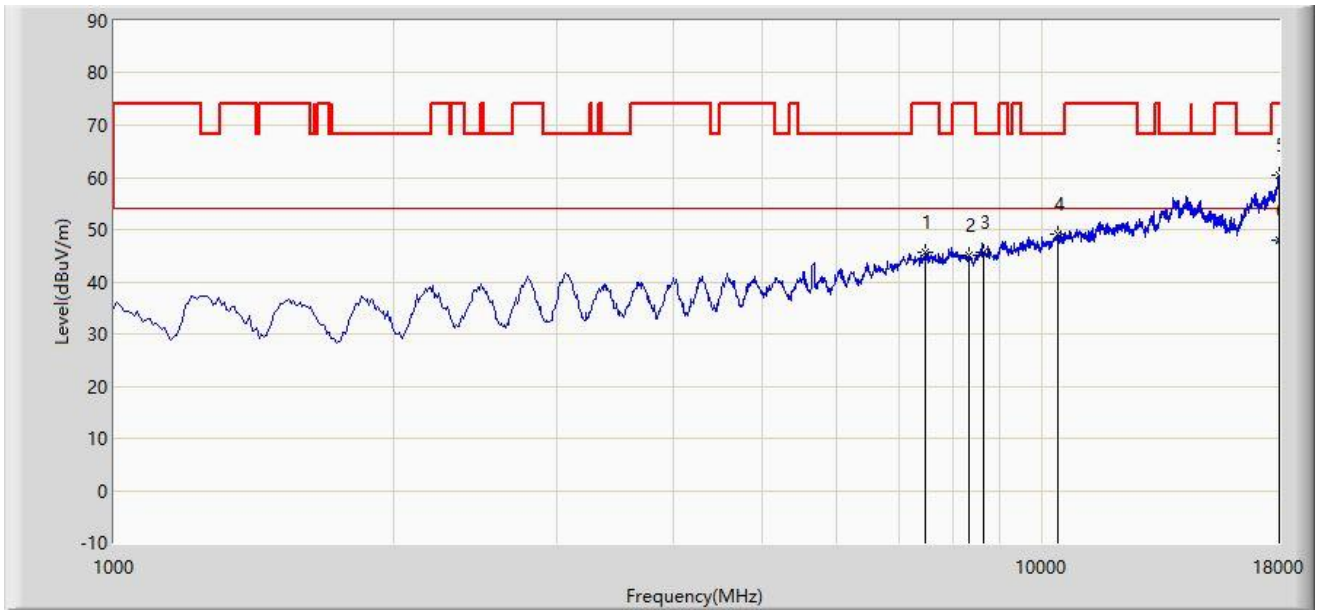


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7477.000	45.728	34.065	-28.272	74.000	11.663	PK
2			8327.000	44.950	32.573	-29.050	74.000	12.377	PK
3			8658.500	45.672	32.797	-22.528	68.200	12.875	PK
4			10375.500	49.222	32.753	-18.978	68.200	16.470	PK
5			18000.000	60.416	28.946	-13.584	74.000	31.470	PK
6		*	18000.000	47.960	16.490	-6.040	54.000	31.470	AV

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of spurious emissions (frequency range 9kHz ~ 30MHz, 18GHz ~ 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site: AC1	Time: 2020/02/26 - 16:18
Limit: FCC_Part15.209_RSE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz	

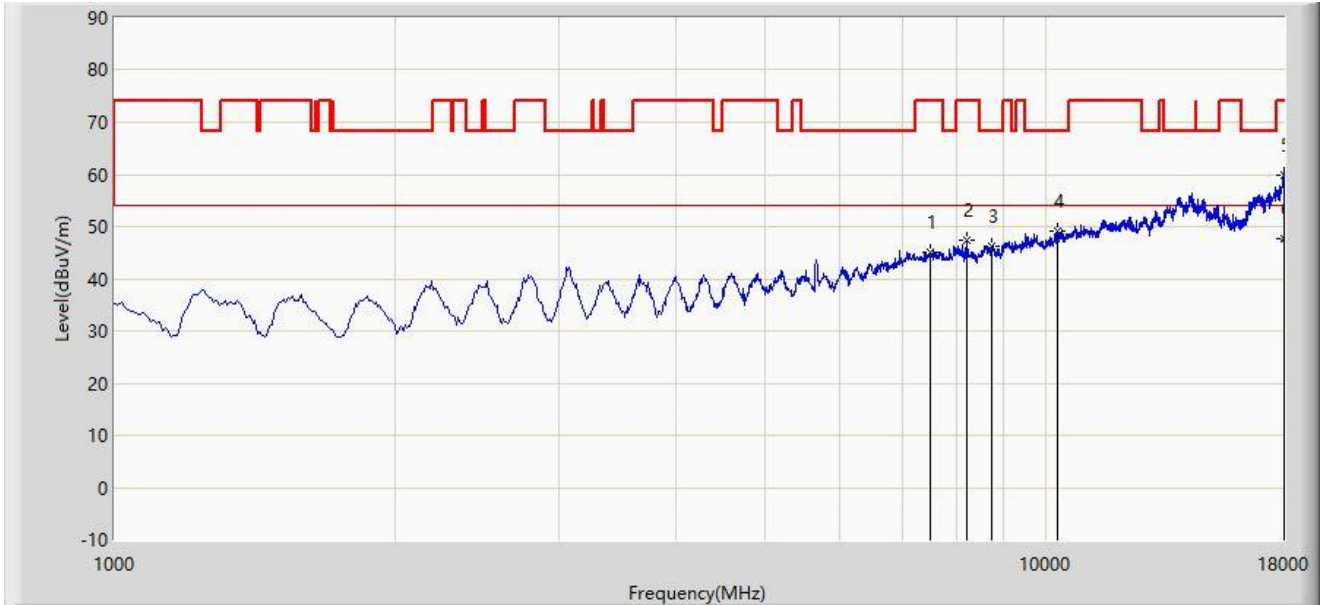

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			7502.500	45.127	33.413	-28.873	74.000	11.714	PK
2			8225.000	47.354	35.022	-26.646	74.000	12.332	PK
3			8735.000	46.157	33.079	-22.043	68.200	13.078	PK
4			10299.000	49.186	32.963	-19.014	68.200	16.223	PK
5			18000.000	59.917	28.447	-14.083	74.000	31.470	PK
6		*	18000.000	47.710	16.240	-6.290	54.000	31.470	AV


Note 1: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of spurious emissions (frequency range 9kHz ~ 30MHz, 18GHz ~ 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

## 4. Radiated Restricted Band Edge Measurement Test Result

Site: AC1	Time: 2020/04/02 - 00:27
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5180MHz	

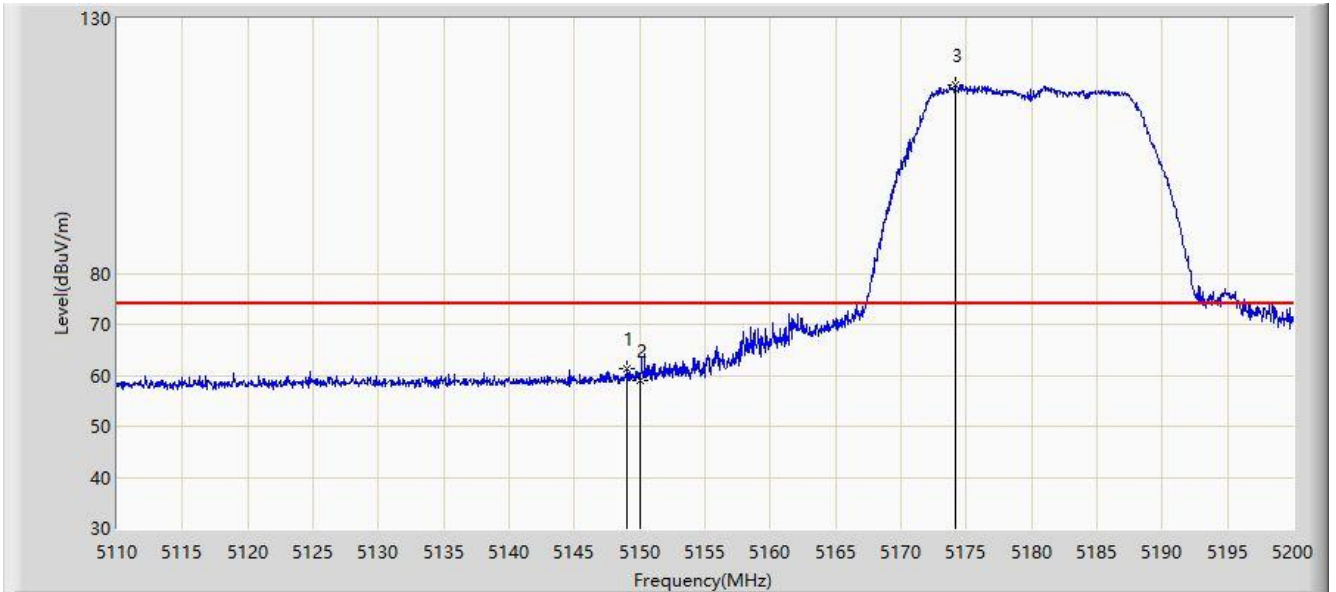


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.060	61.204	57.558	-12.796	74.000	3.646	PK
2			5150.000	59.095	55.449	-14.905	74.000	3.646	PK
3		*	5174.170	116.819	113.158	N/A	N/A	3.660	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/04/02 - 00:29
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5180MHz	

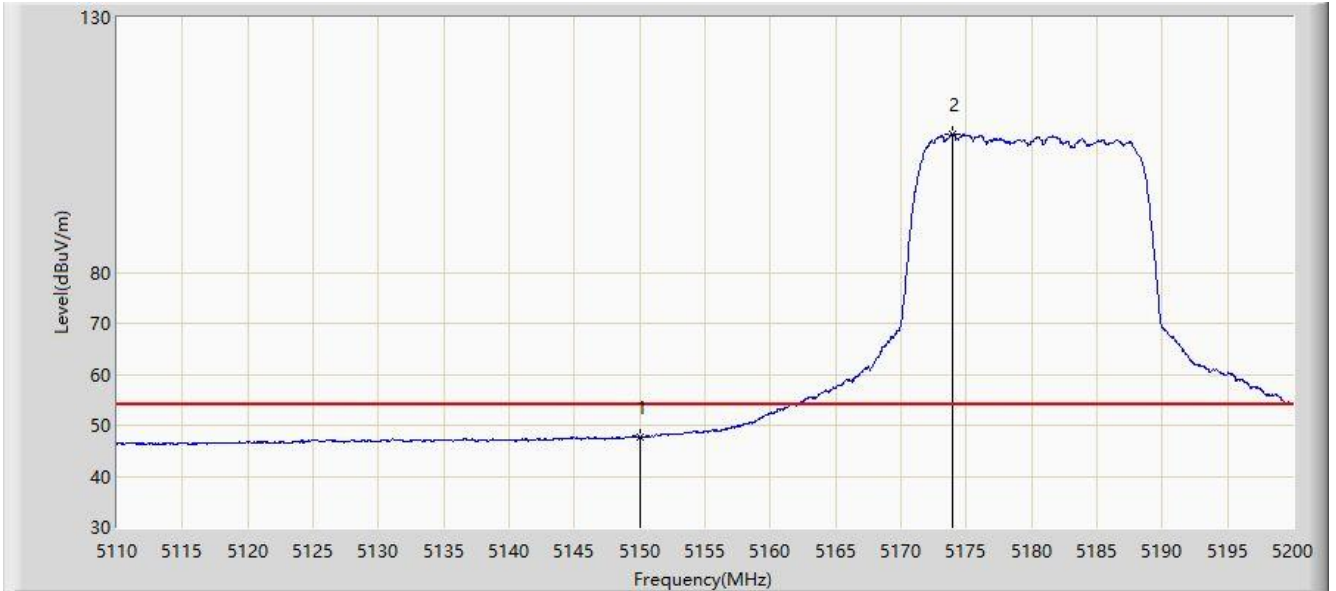


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.723	44.077	-6.277	54.000	3.646	AV
2		*	5173.900	107.186	103.525	N/A	N/A	3.661	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/04/02 - 00:32
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5180MHz	

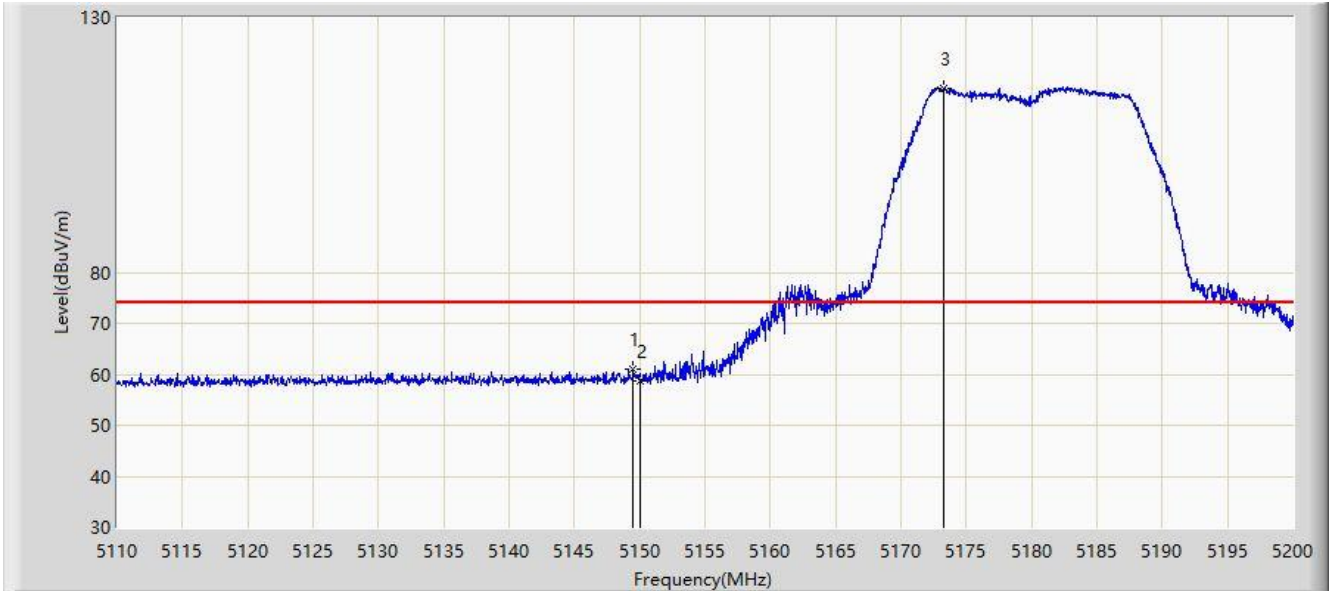


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.510	61.053	57.407	-12.947	74.000	3.646	PK
2			5150.000	58.810	55.164	-15.190	74.000	3.646	PK
3		*	5173.270	116.185	112.524	N/A	N/A	3.660	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/04/02 - 00:30
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5180MHz	

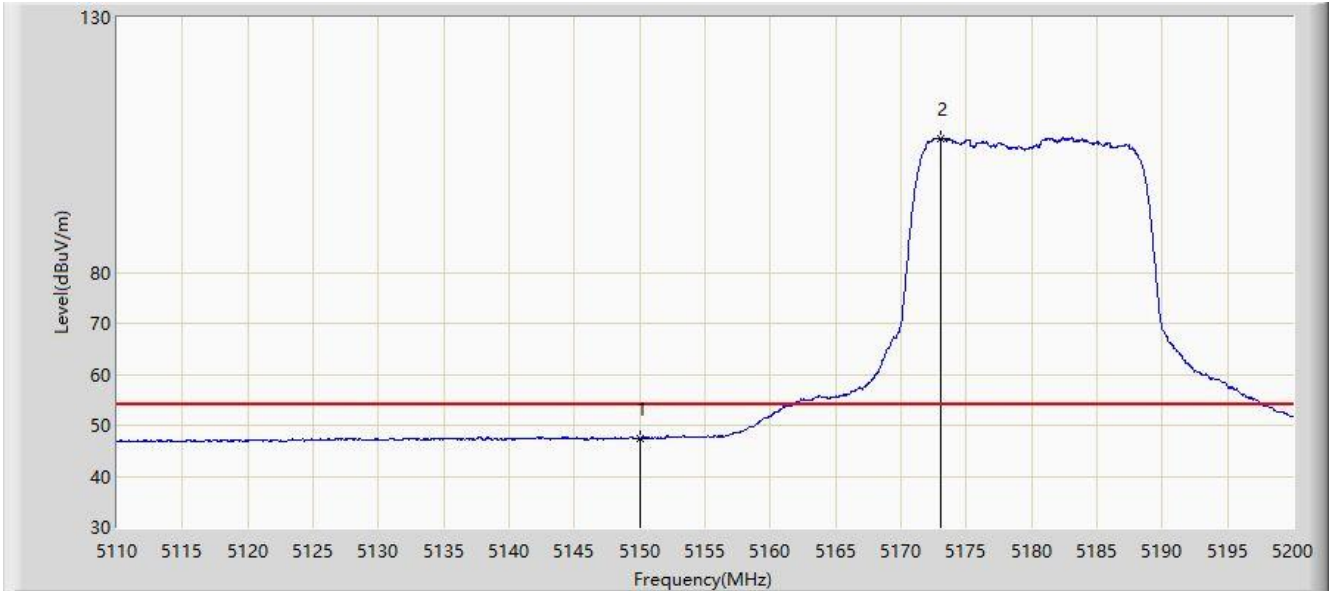

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.491	43.845	-6.509	54.000	3.646	AV
2		*	5173.090	106.275	102.615	N/A	N/A	3.660	AV


Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)





Site: AC1	Time: 2020/02/23 - 11:38
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5320MHz	

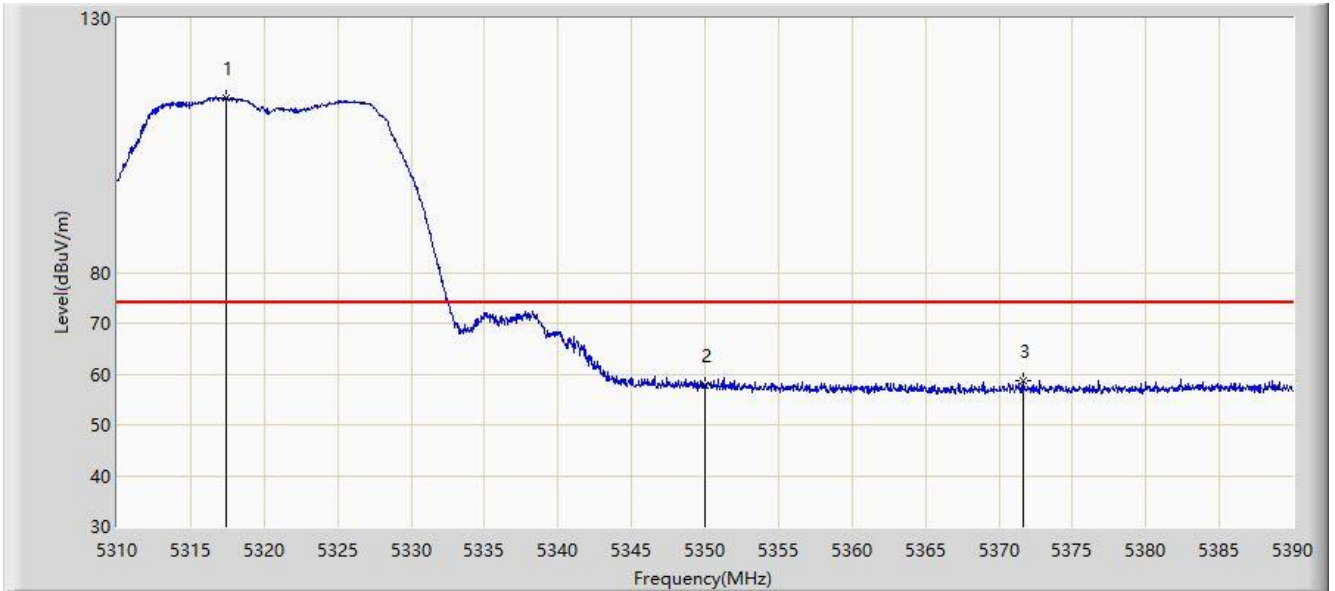


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.440	114.321	110.567	N/A	N/A	3.754	PK
2			5350.000	57.738	53.964	-16.262	74.000	3.774	PK
3			5371.640	58.741	54.953	-15.259	74.000	3.788	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 11:48
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5320MHz	

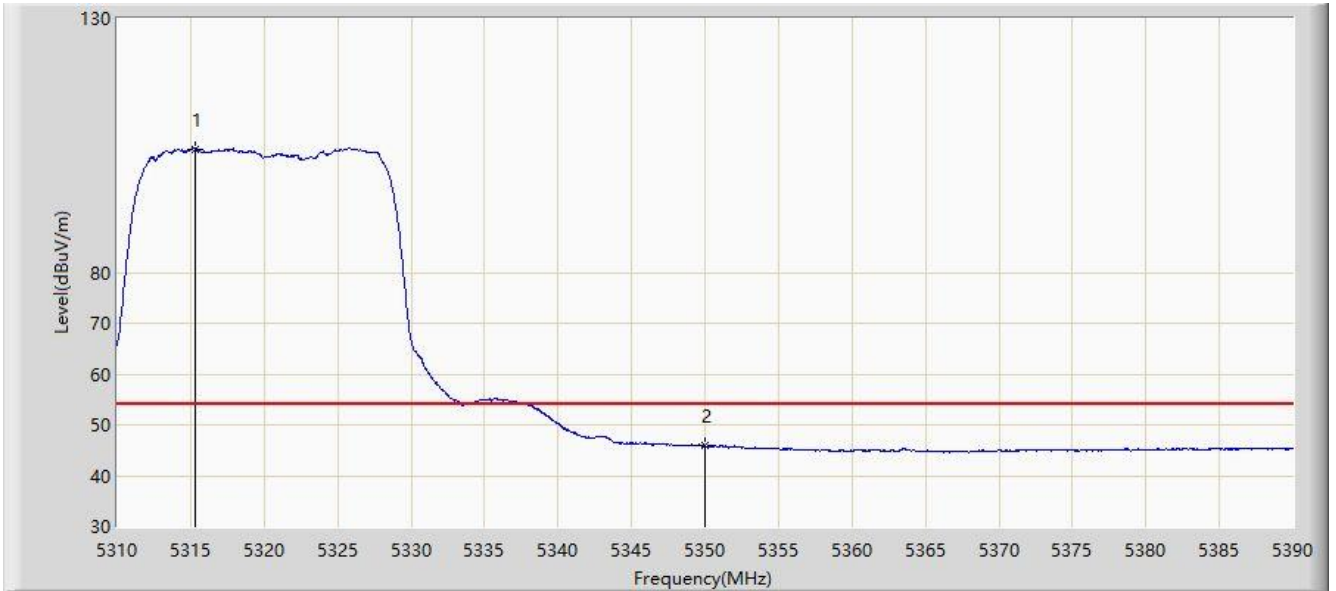


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.320	104.323	100.571	N/A	N/A	3.752	AV
2			5350.000	45.846	42.072	-8.154	54.000	3.774	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 11:52
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5320MHz	

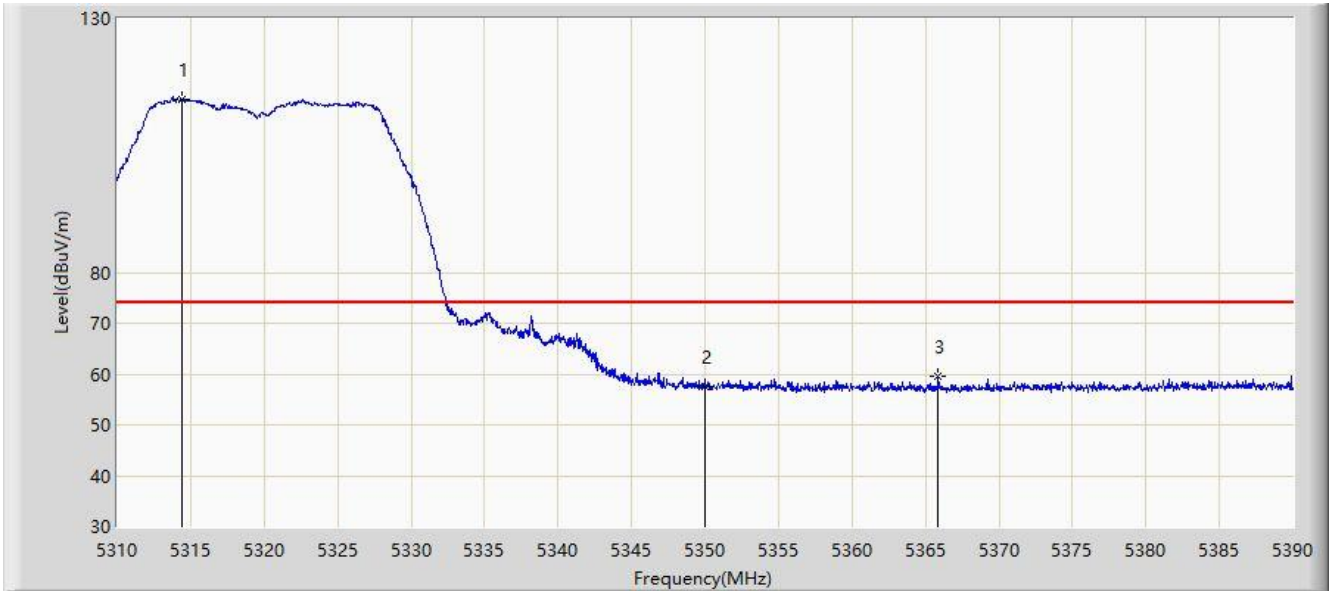


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.440	114.020	110.268	N/A	N/A	3.752	PK
2			5350.000	57.632	53.858	-16.368	74.000	3.774	PK
3			5365.880	59.561	55.777	-14.439	74.000	3.784	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/23 - 11:55
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5320MHz	

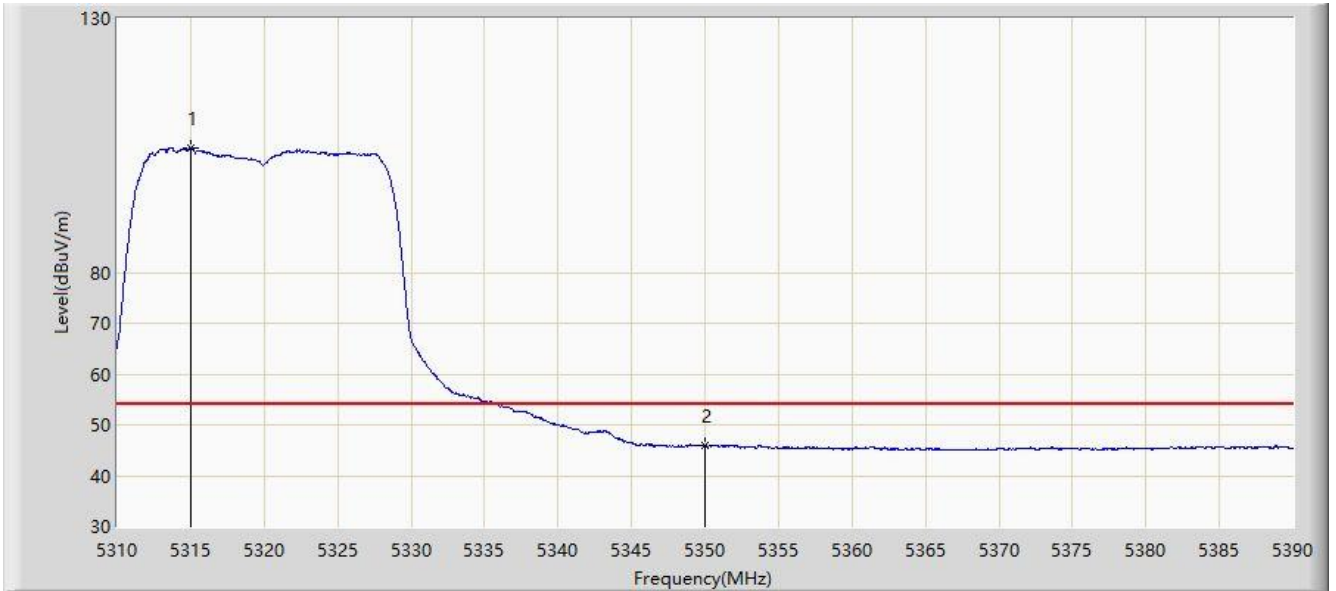


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.040	104.494	100.742	N/A	N/A	3.751	AV
2			5350.000	45.814	42.040	-8.186	54.000	3.774	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/23 - 12:08
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5500MHz	

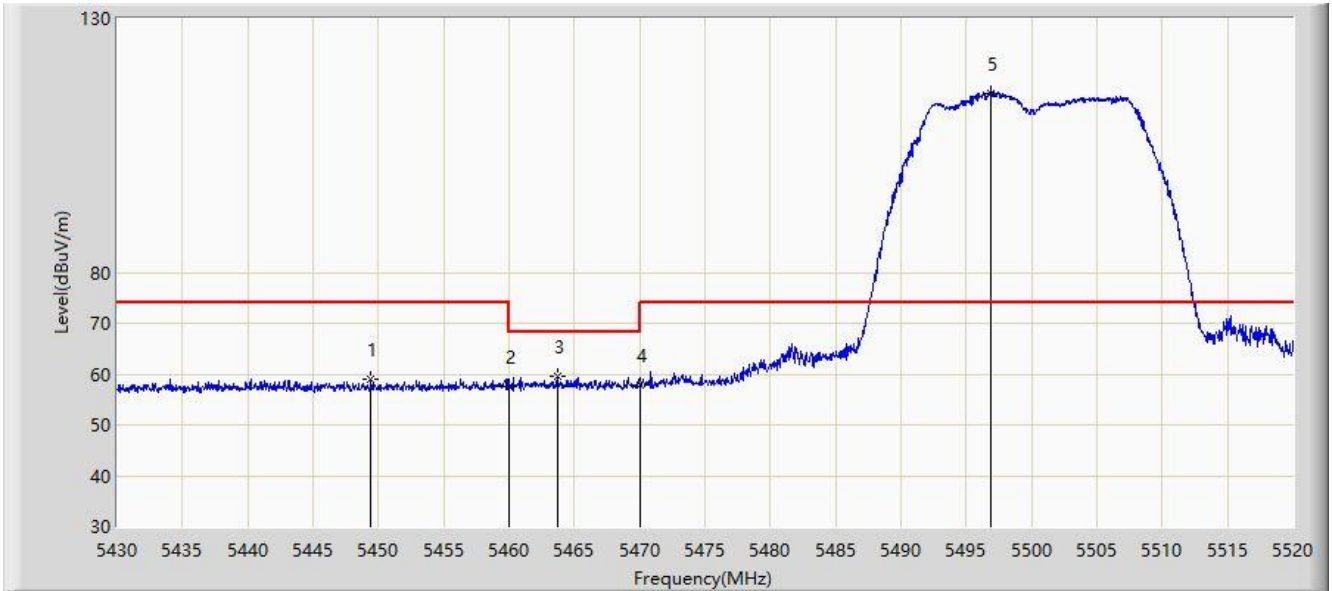


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5449.440	59.105	55.268	-14.895	74.000	3.836	PK
2			5460.000	57.515	53.671	-16.485	74.000	3.844	PK
3			5463.705	59.602	55.756	-8.598	68.200	3.846	PK
4			5470.000	57.963	54.112	-10.237	68.200	3.850	PK
5		*	5496.915	115.111	111.234	N/A	N/A	3.877	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 12:10
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5500MHz	

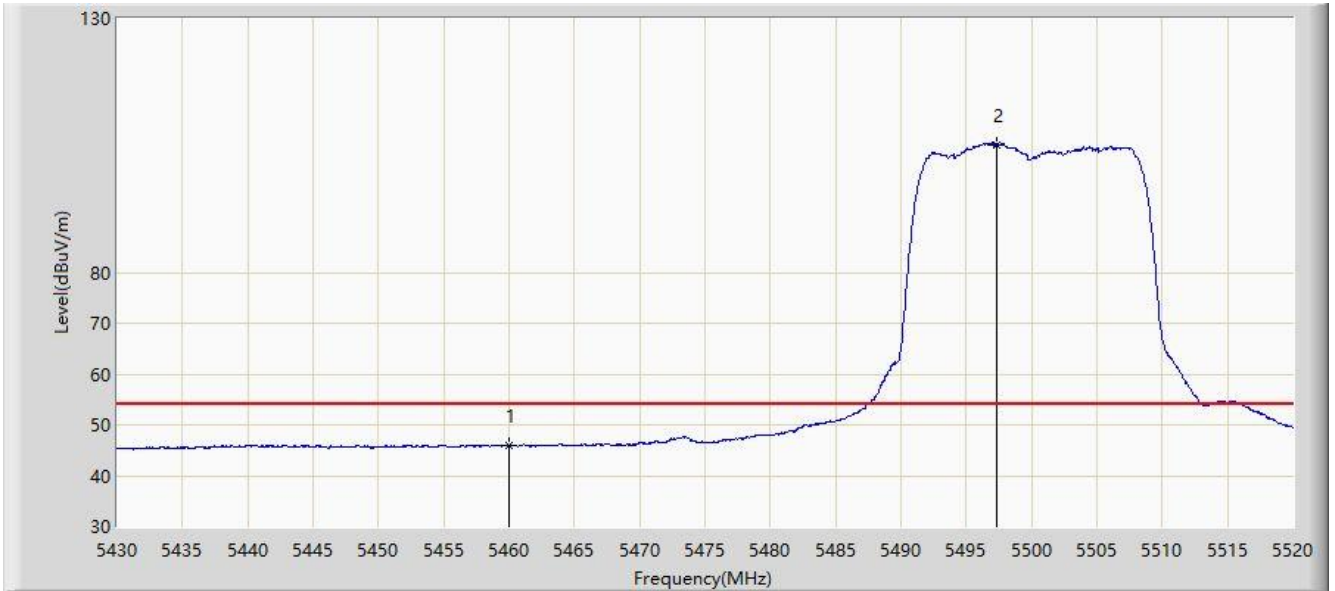


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.821	41.977	-8.179	54.000	3.844	AV
2		*	5497.275	105.057	101.179	N/A	N/A	3.877	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 12:11
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5500MHz	

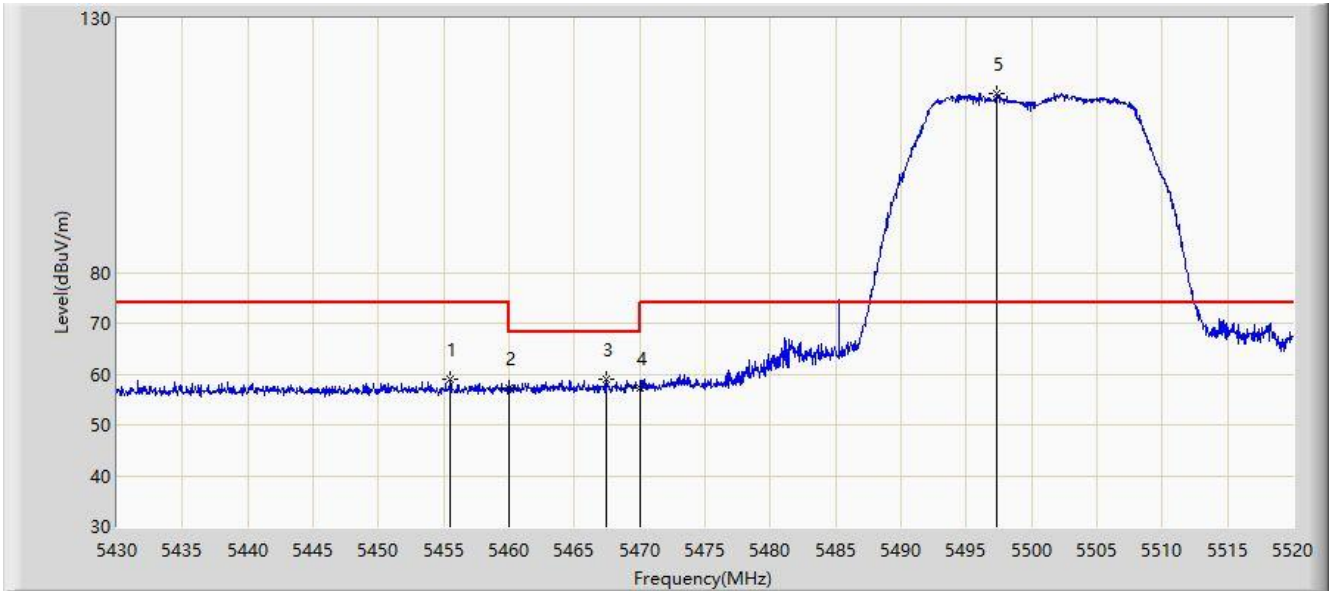


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.515	58.963	55.122	-15.037	74.000	3.841	PK
2			5460.000	57.343	53.499	-16.657	74.000	3.844	PK
3			5467.485	59.059	55.210	-9.141	68.200	3.849	PK
4			5470.000	57.368	53.517	-10.832	68.200	3.850	PK
5		*	5497.365	115.284	111.406	N/A	N/A	3.877	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 12:12
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5500MHz	

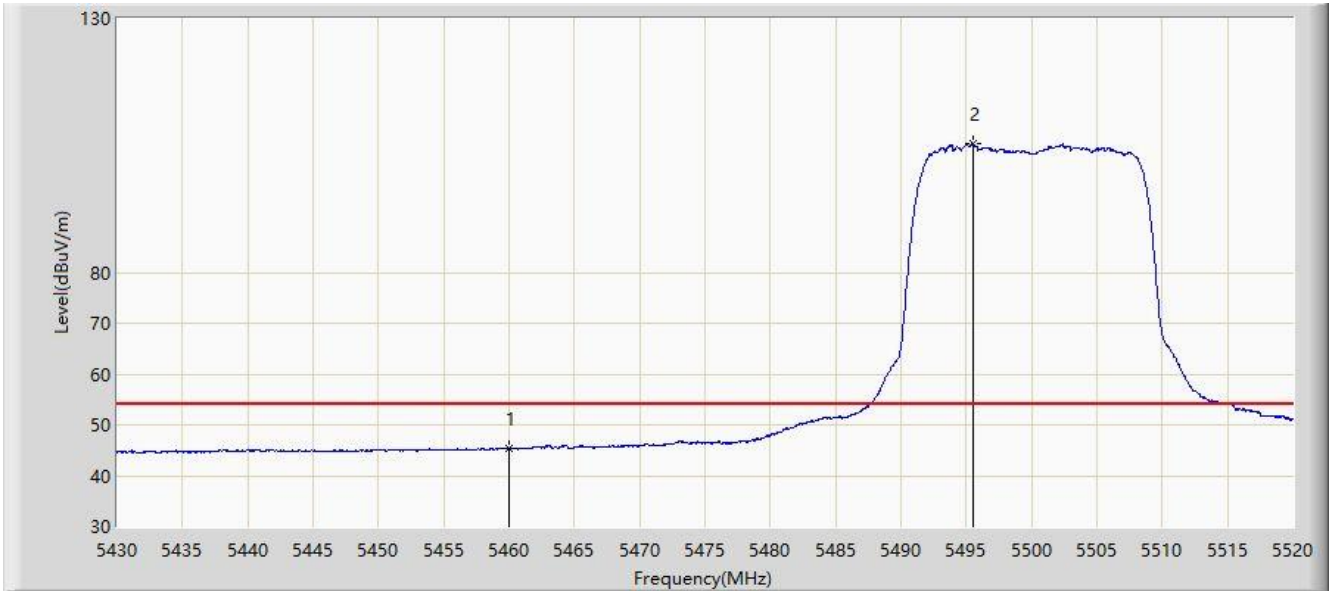


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.242	41.398	-8.758	54.000	3.844	AV
2		*	5495.475	105.225	101.350	N/A	N/A	3.876	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 13:17
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5700MHz	

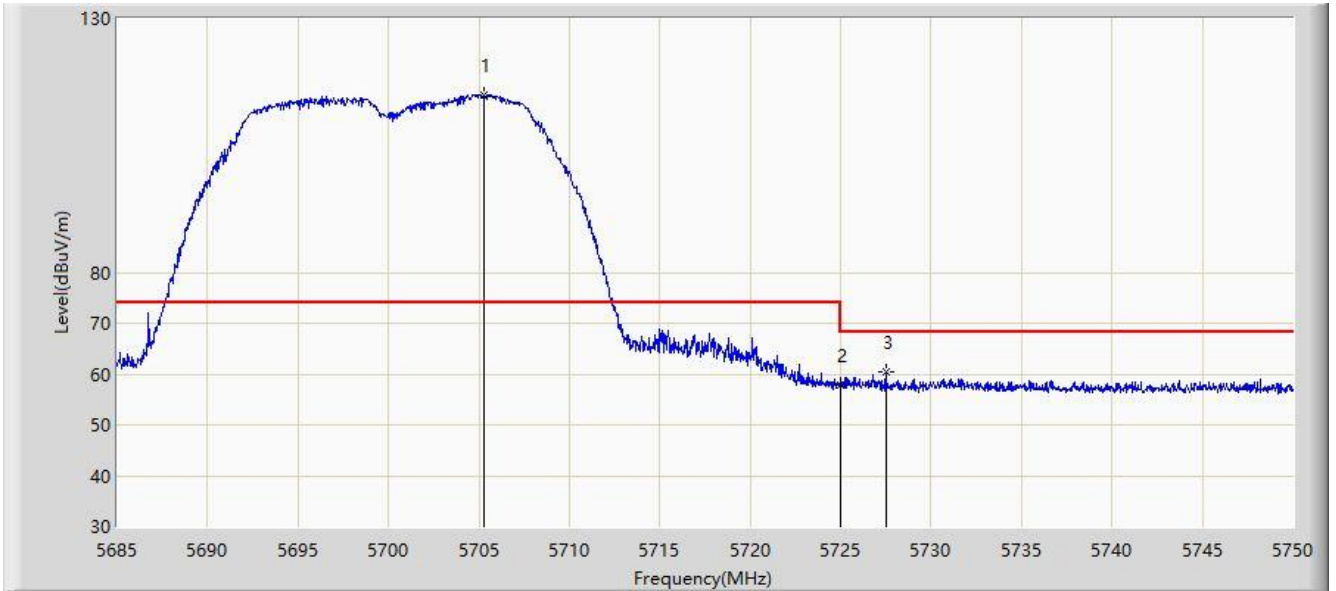


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5705.312	114.956	110.298	N/A	N/A	4.657	PK
2			5725.000	57.802	53.068	-10.398	68.200	4.734	PK
3			5727.510	60.448	55.705	-7.752	68.200	4.744	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 13:19
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5700MHz	

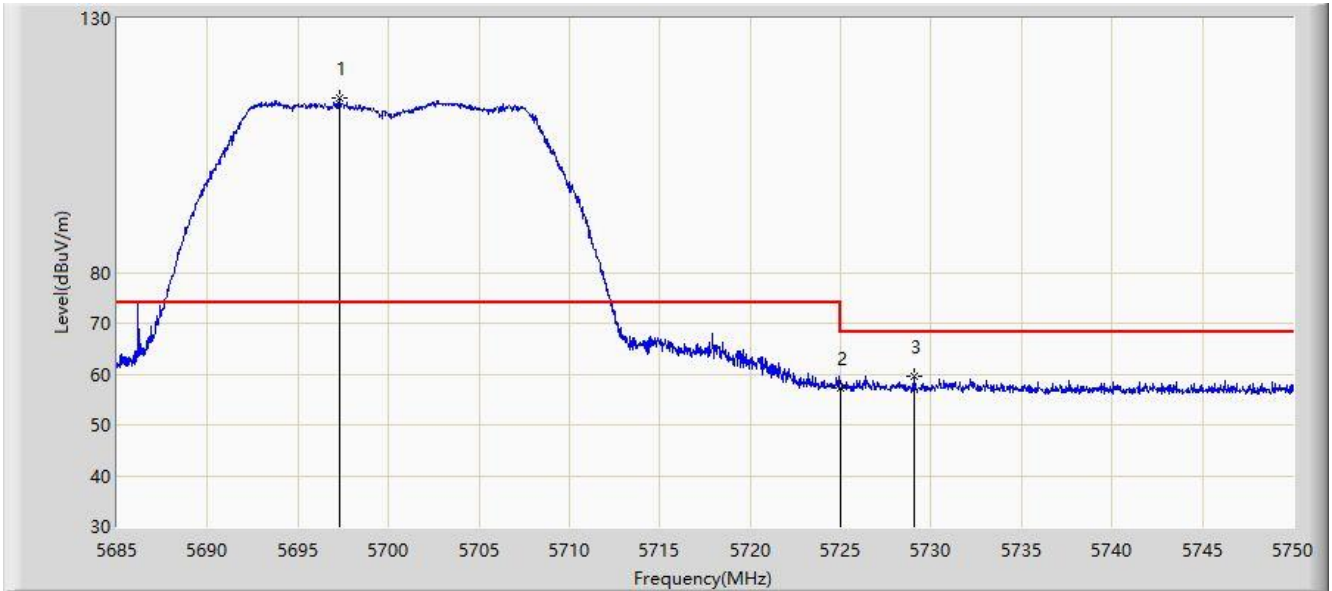


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.317	114.279	109.651	N/A	N/A	4.628	PK
2			5725.000	57.199	52.465	-11.001	68.200	4.734	PK
3			5729.038	59.605	54.856	-8.595	68.200	4.749	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/24 - 14:34
Limit: FCC_Part 15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5745MHz	

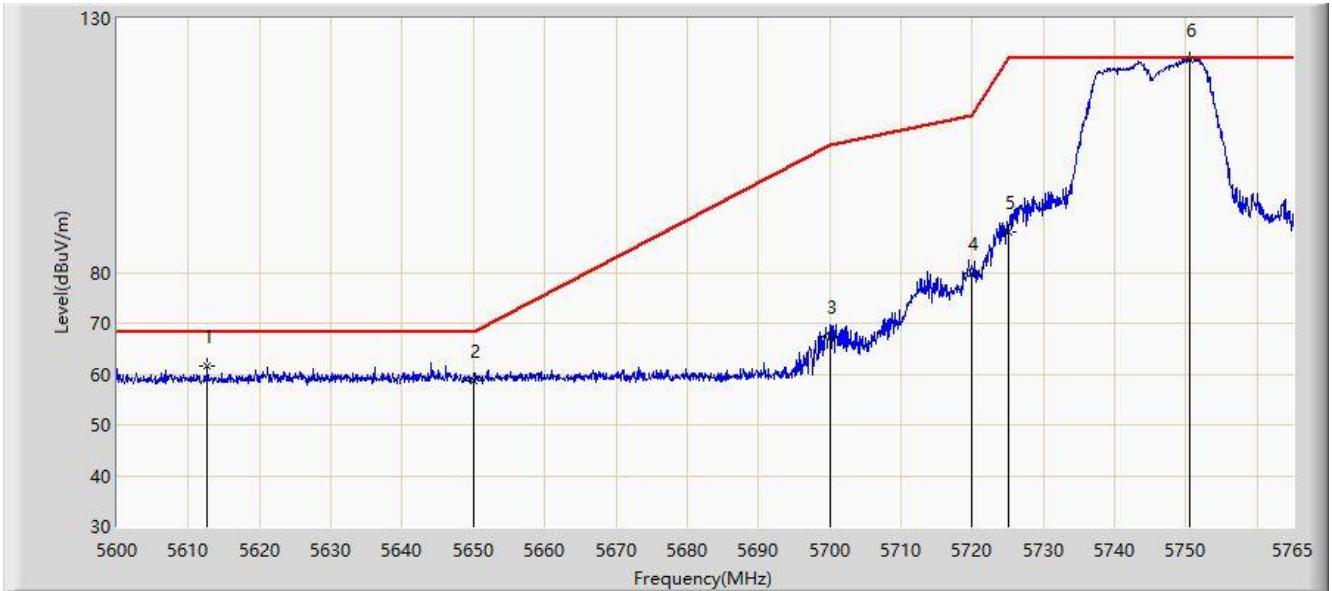


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5612.705	61.574	57.272	-6.626	68.200	4.302	PK
2			5650.000	58.694	54.248	-9.506	68.200	4.446	PK
3			5700.000	67.387	62.749	-37.813	105.200	4.638	PK
4			5720.000	79.791	75.076	-31.009	110.800	4.715	PK
5			5725.000	87.988	83.254	-34.212	122.200	4.734	PK
6		*	5750.562	121.985	117.153	N/A	N/A	4.832	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/24 - 14:38
Limit: FCC_Part 15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5745MHz	

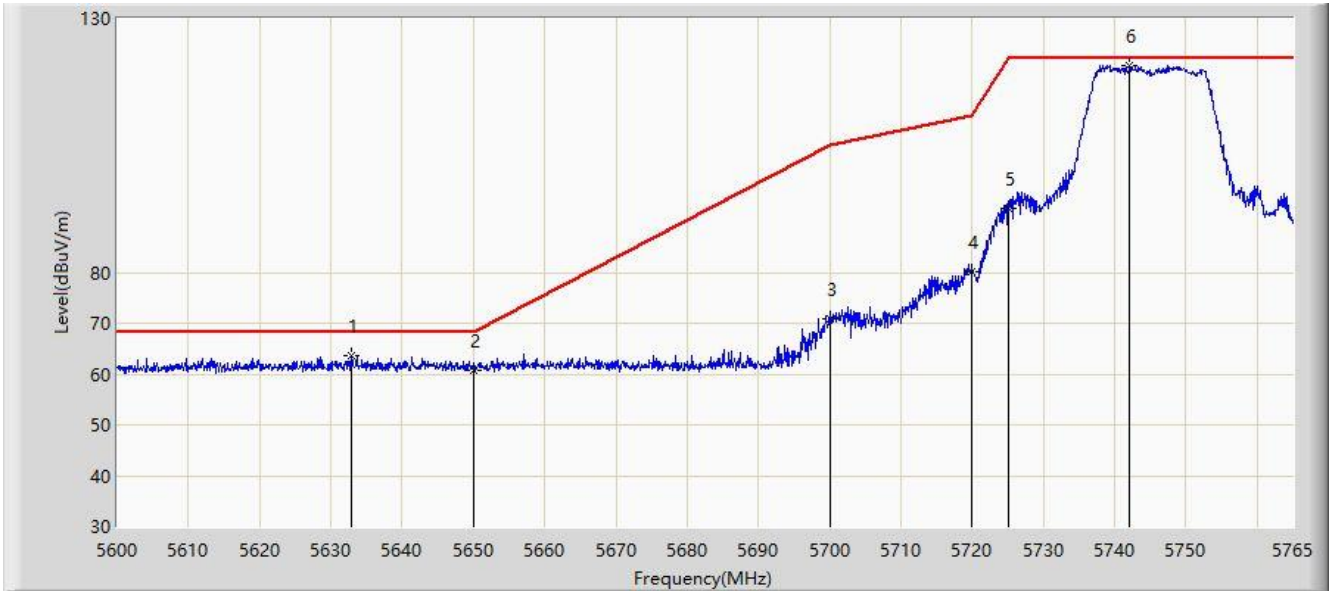


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5632.917	63.542	59.161	-4.658	68.200	4.380	PK
2			5650.000	60.614	56.168	-7.586	68.200	4.446	PK
3			5700.000	70.751	66.113	-34.449	105.200	4.638	PK
4			5720.000	80.118	75.403	-30.682	110.800	4.715	PK
5			5725.000	92.556	87.822	-29.644	122.200	4.734	PK
6		*	5742.147	120.639	115.839	N/A	N/A	4.799	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/24 - 14:41
Limit: FCC_Part 15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5825MHz	

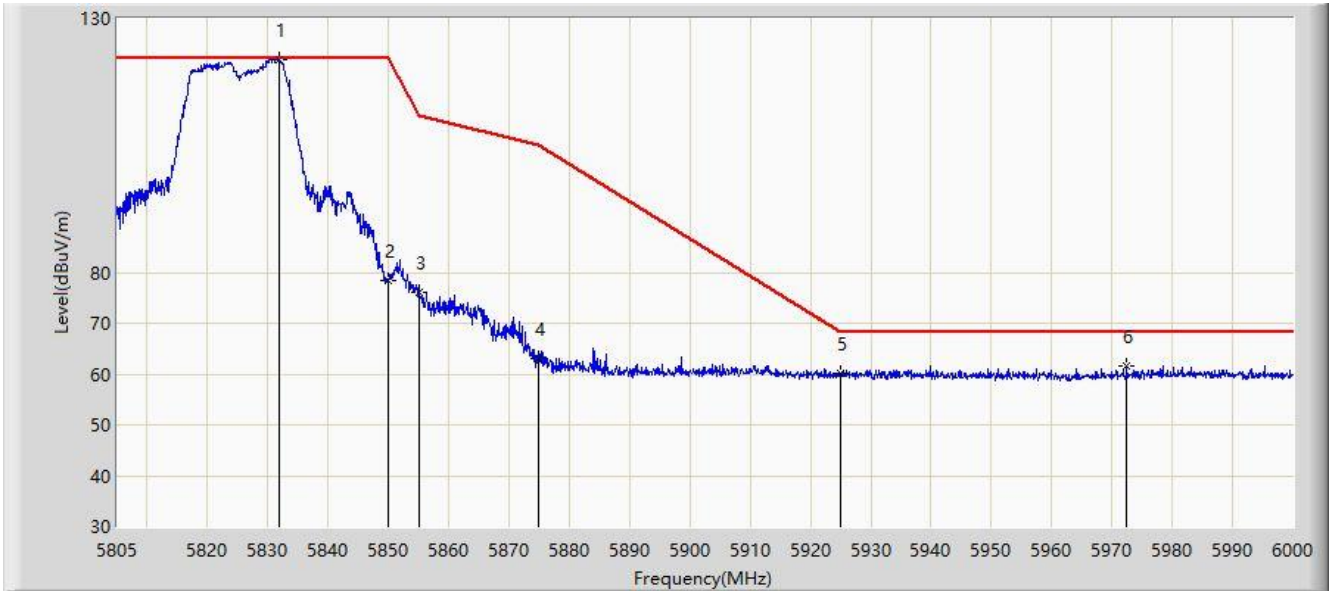


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5831.910	121.853	116.708	N/A	N/A	5.145	PK
2			5850.000	78.509	73.295	-43.691	122.200	5.214	PK
3			5855.000	75.985	70.752	-34.815	110.800	5.233	PK
4			5875.000	63.104	57.794	-42.096	105.200	5.310	PK
5			5925.000	60.030	54.528	-8.170	68.200	5.502	PK
6			5972.408	61.627	55.943	-6.573	68.200	5.684	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/24 - 14:43
Limit: FCC_Part 15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5825MHz	

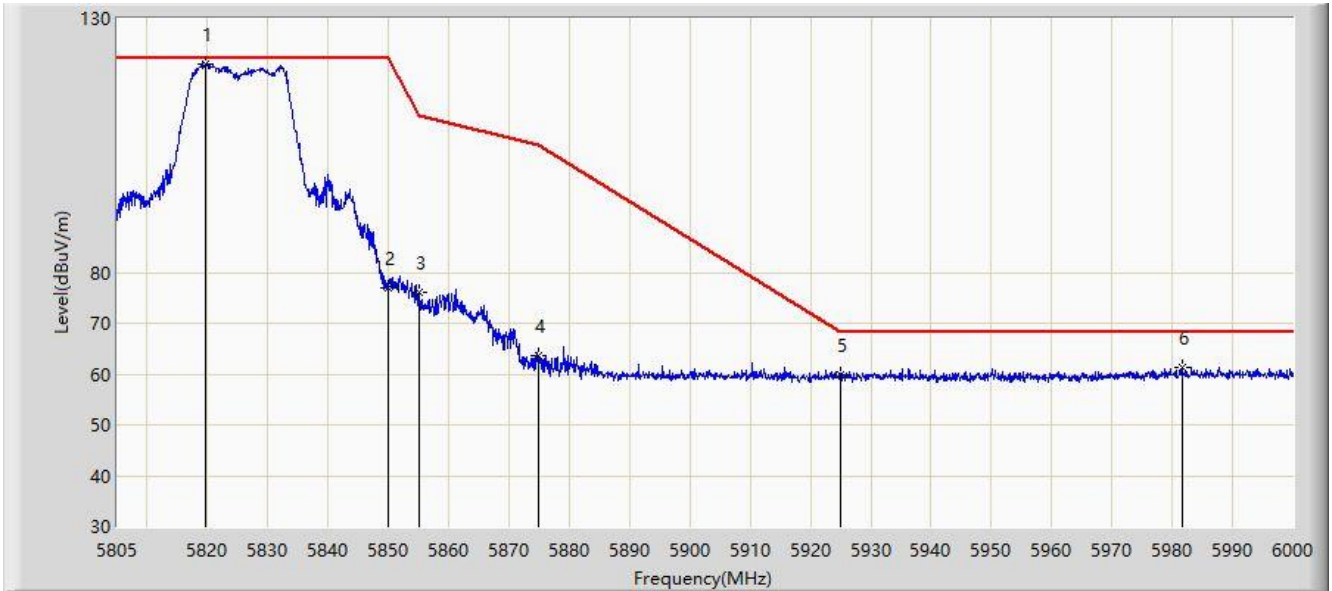


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.723	120.910	115.812	N/A	N/A	5.098	PK
2			5850.000	76.856	71.642	-45.344	122.200	5.214	PK
3			5855.000	76.069	70.836	-34.731	110.800	5.233	PK
4			5875.000	63.624	58.314	-41.576	105.200	5.310	PK
5			5925.000	59.925	54.423	-8.275	68.200	5.502	PK
6			5981.670	61.248	55.528	-6.952	68.200	5.720	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/02 - 00:33
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

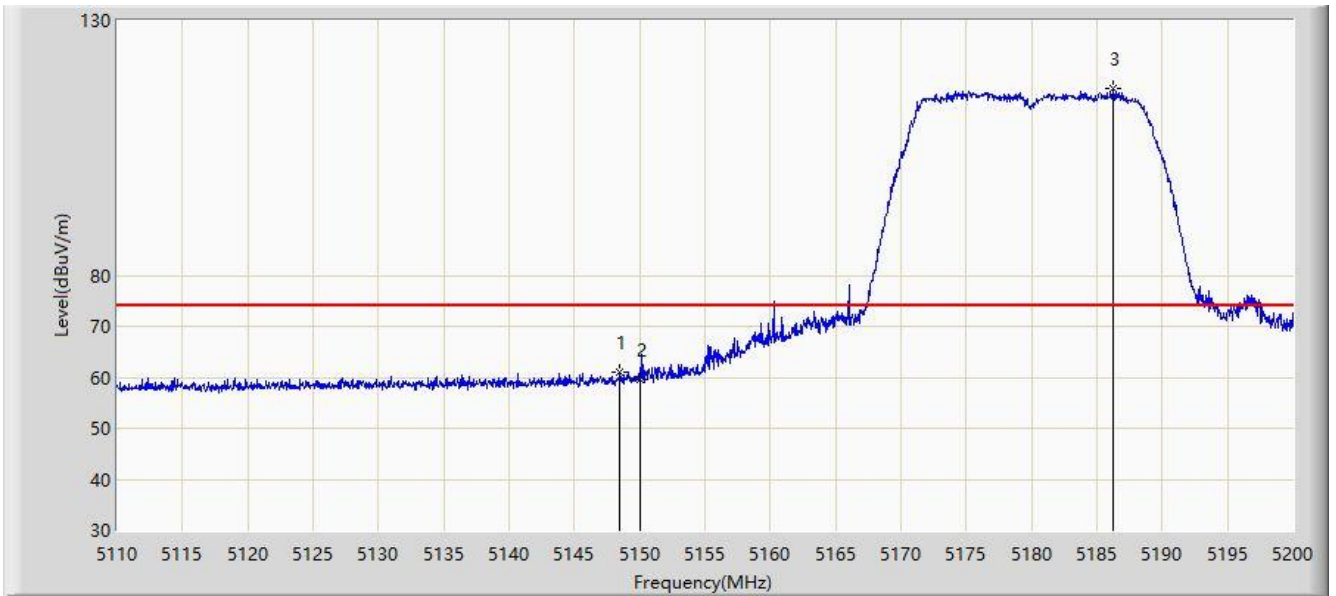


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.475	61.107	57.462	-12.893	74.000	3.645	PK
2			5150.000	59.665	56.019	-14.335	74.000	3.646	PK
3		*	5186.275	116.613	112.944	N/A	N/A	3.670	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/04/02 - 00:35
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

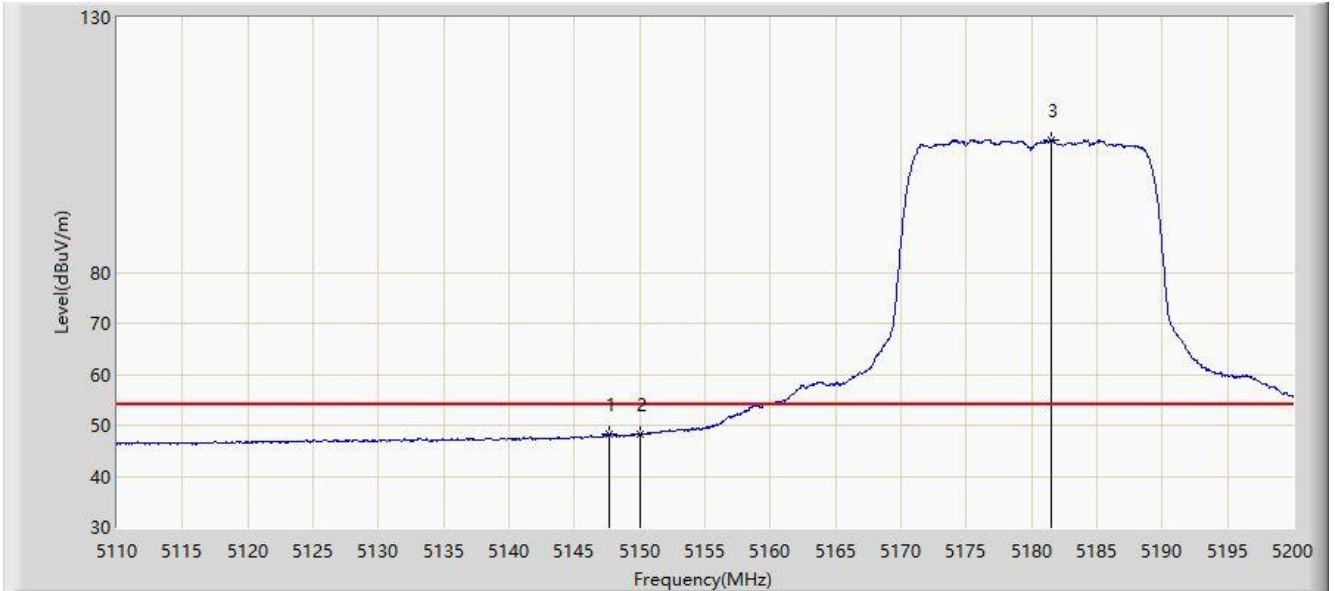

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.620	48.170	44.525	-5.830	54.000	3.645	AV
2			5150.000	48.146	44.500	-5.854	54.000	3.646	AV
3		*	5181.460	105.932	102.266	N/A	N/A	3.666	AV


Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)





Site: AC1	Time: 2020/04/02 - 00:38
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

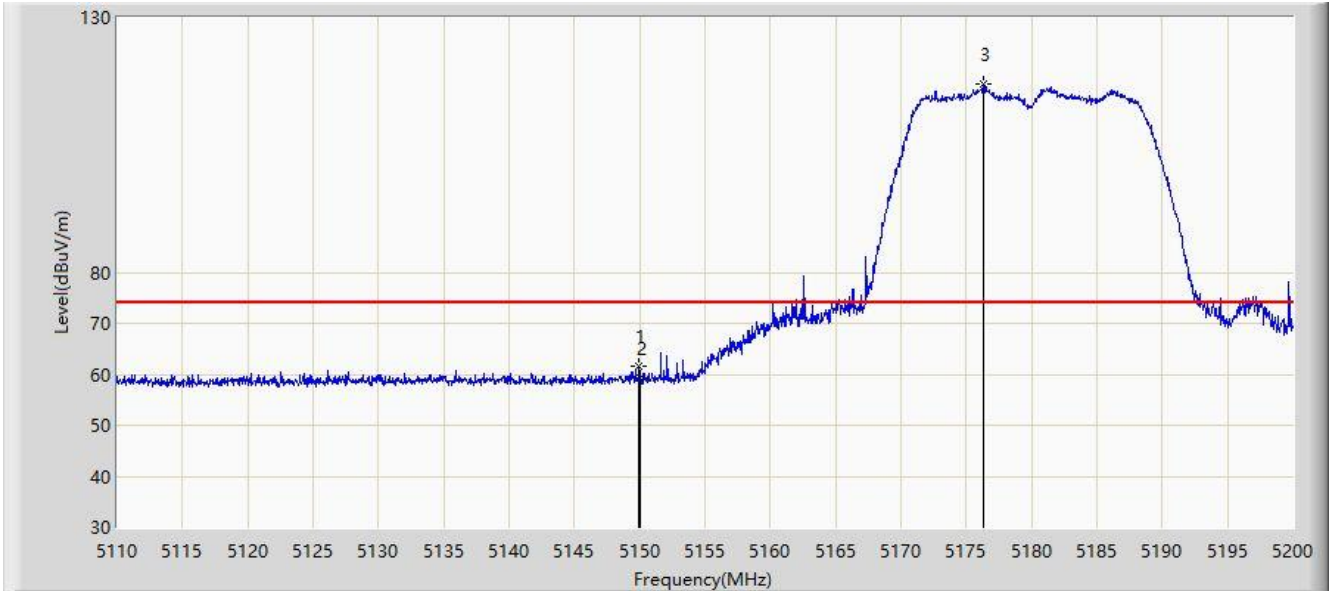


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.960	61.490	57.844	-12.510	74.000	3.646	PK
2			5150.000	59.192	55.546	-14.808	74.000	3.646	PK
3		*	5176.285	116.847	113.185	N/A	N/A	3.663	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/04/02 - 00:36
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

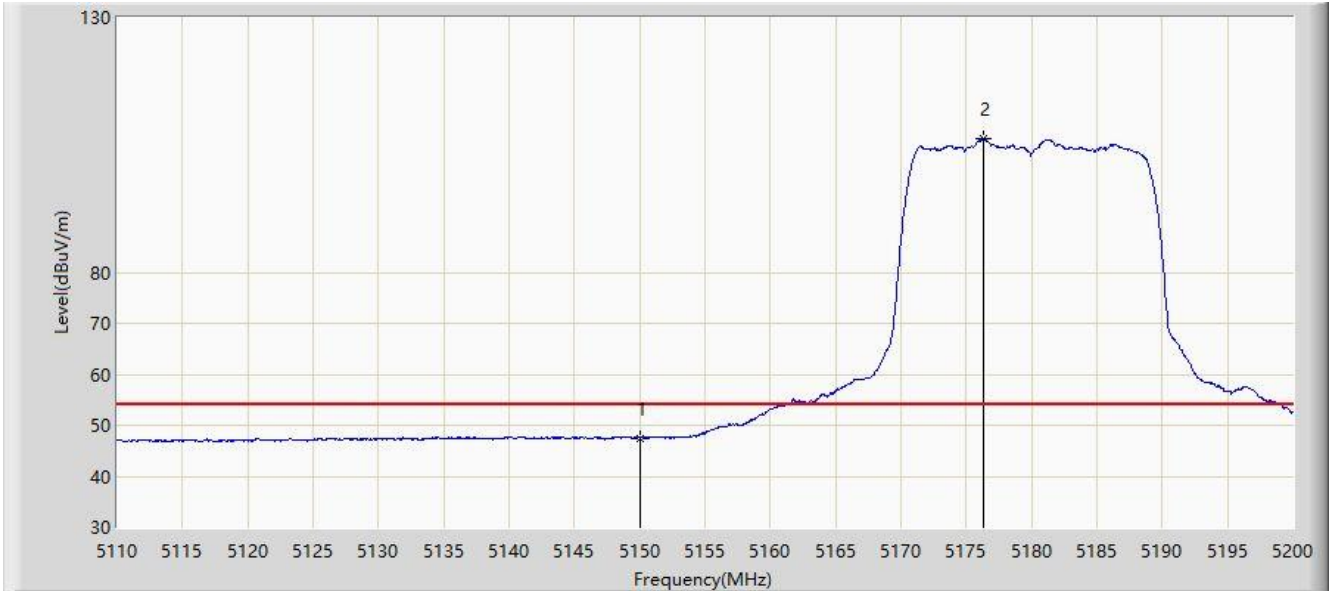


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.530	43.884	-6.470	54.000	3.646	AV
2		*	5176.330	106.286	102.623	N/A	N/A	3.663	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 12:14
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

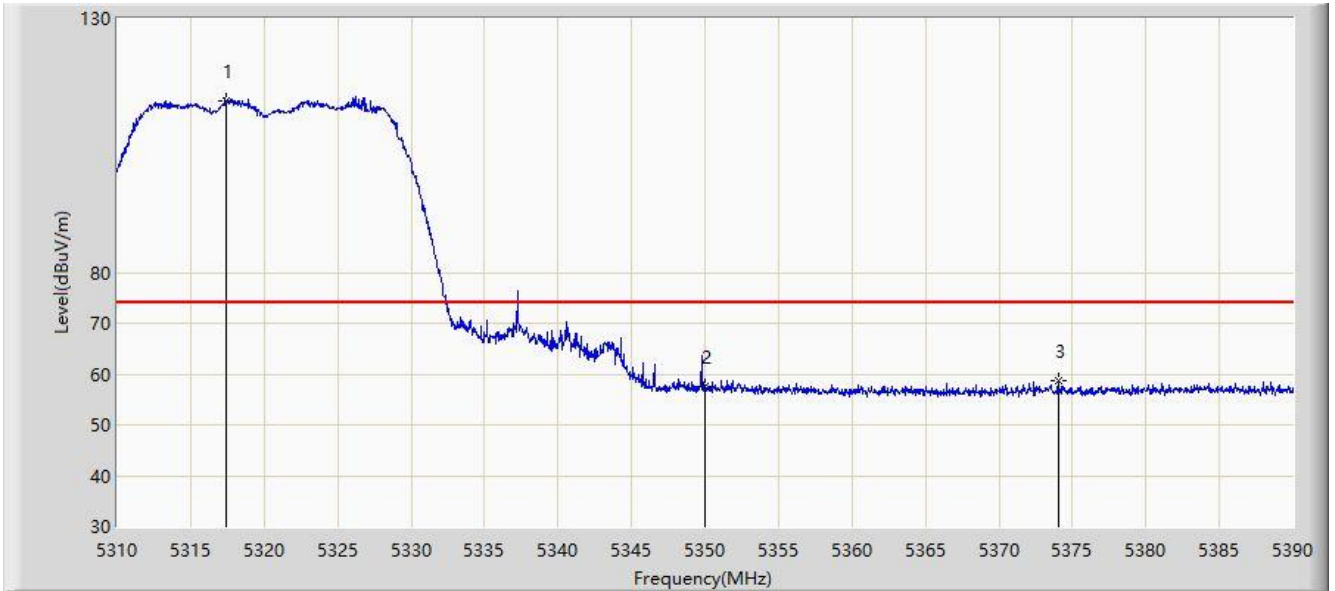


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.440	113.696	109.942	N/A	N/A	3.754	PK
2			5350.000	57.554	53.780	-16.446	74.000	3.774	PK
3			5374.040	58.778	54.989	-15.222	74.000	3.789	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 12:23
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

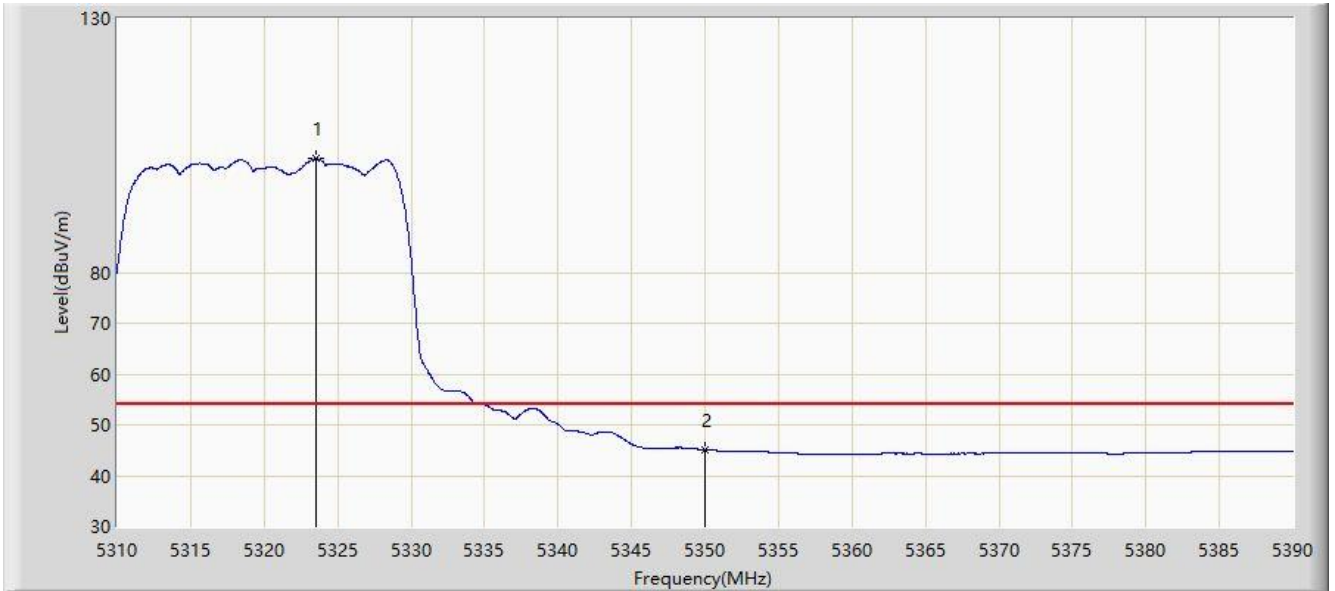


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.520	102.372	98.614	N/A	N/A	3.757	AV
2			5350.000	45.098	41.324	-8.902	54.000	3.774	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 12:26
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

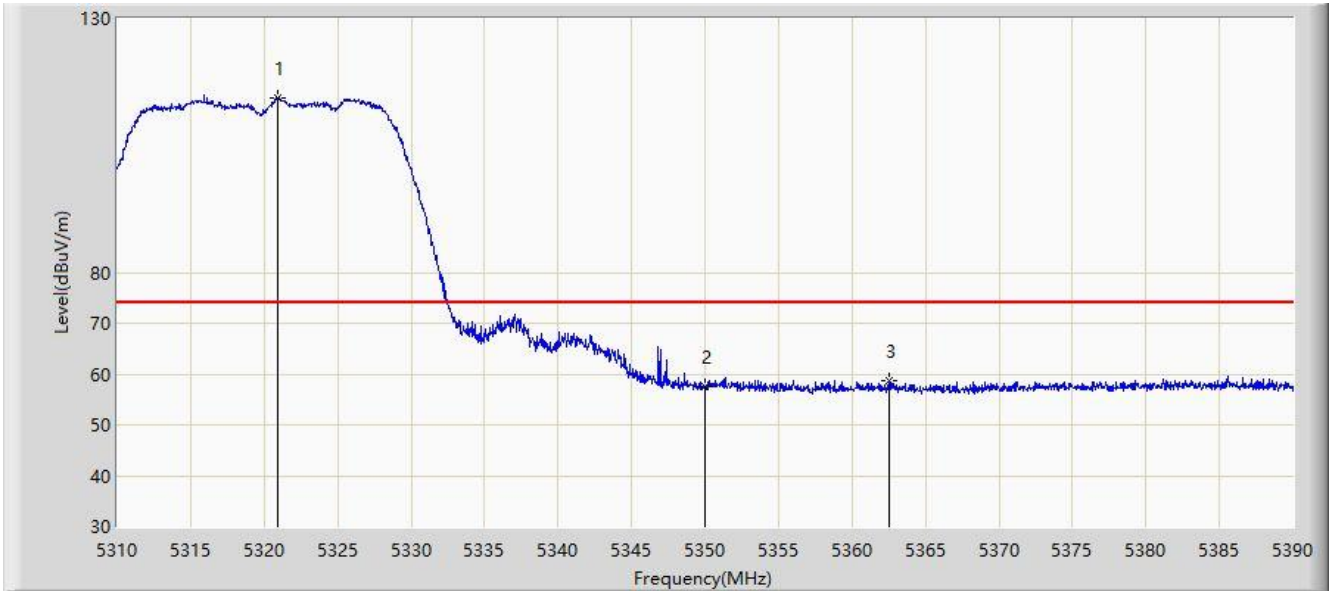


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5320.960	114.256	110.500	N/A	N/A	3.757	PK
2			5350.000	57.514	53.740	-16.486	74.000	3.774	PK
3			5362.520	58.646	54.864	-15.354	74.000	3.782	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 12:29
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

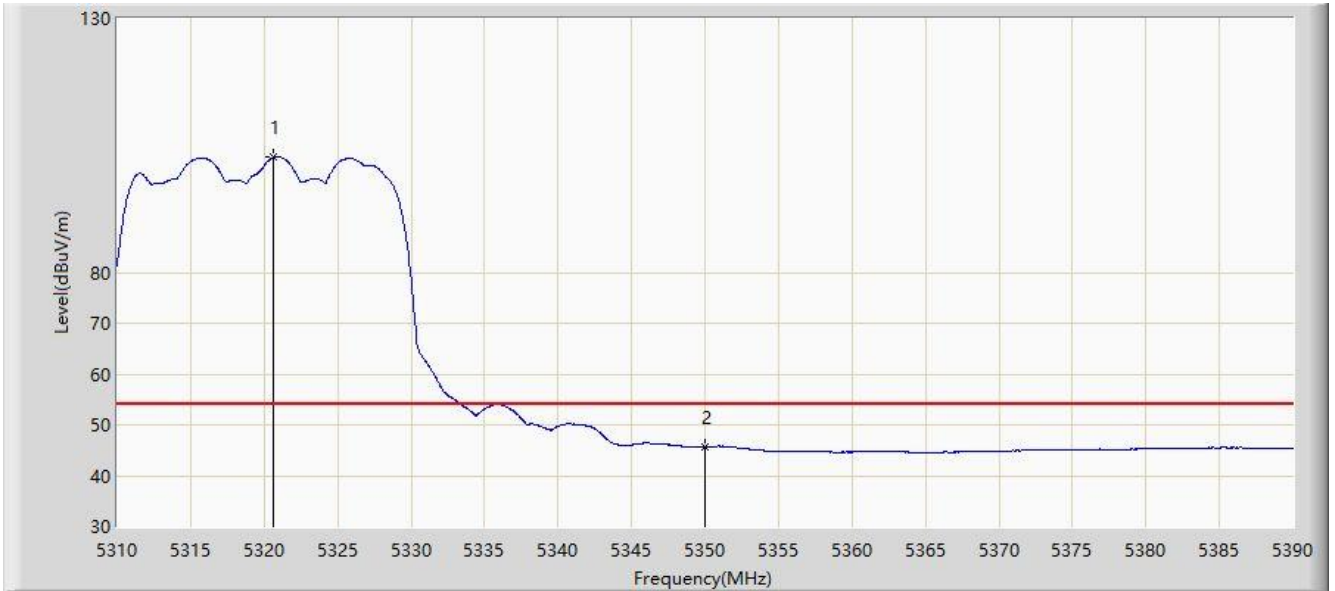


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5320.640	102.693	98.937	N/A	N/A	3.756	AV
2			5350.000	45.592	41.818	-8.408	54.000	3.774	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 12:31
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

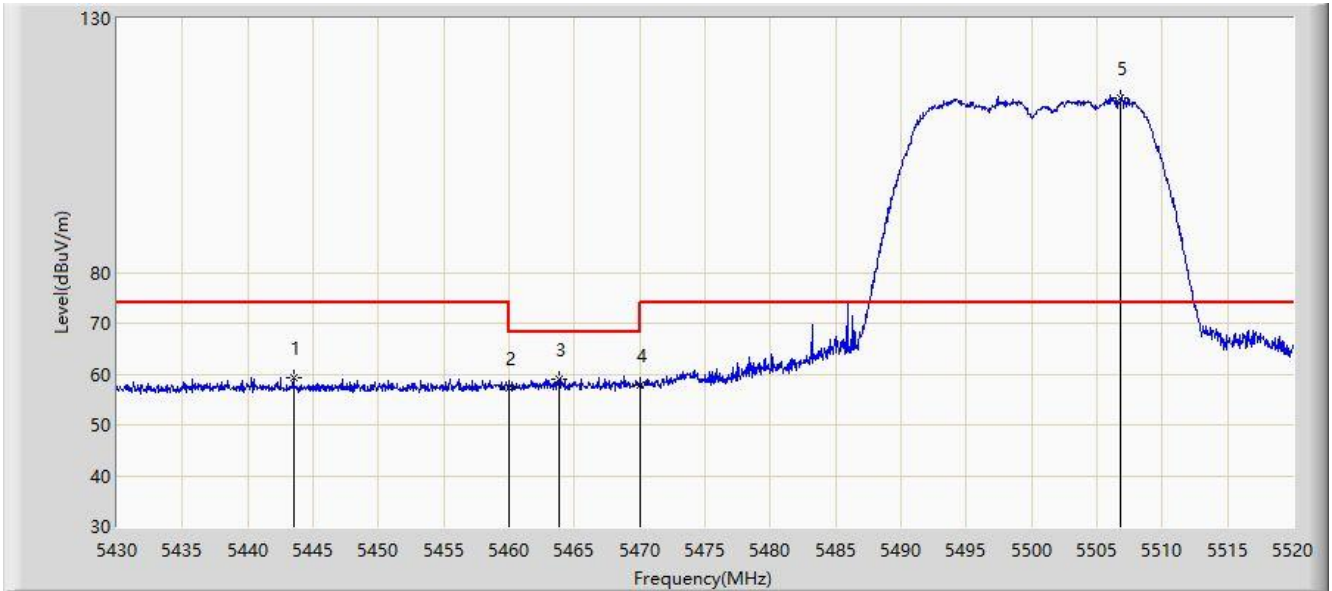


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5443.500	59.383	55.550	-14.617	74.000	3.833	PK
2			5460.000	57.356	53.512	-16.644	74.000	3.844	PK
3			5463.885	59.060	55.214	-9.140	68.200	3.846	PK
4			5470.000	57.968	54.117	-10.232	68.200	3.850	PK
5		*	5506.815	114.266	110.370	N/A	N/A	3.896	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 12:45
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

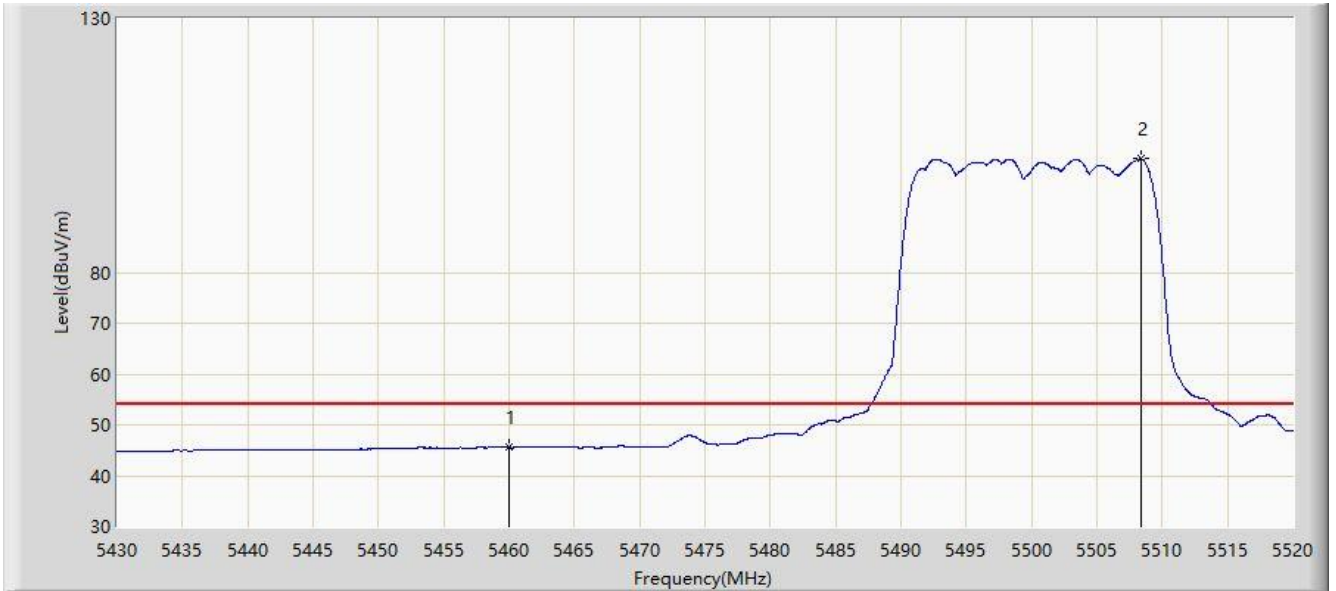

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.548	41.704	-8.452	54.000	3.844	AV
2		*	5508.345	102.408	98.506	N/A	N/A	3.902	AV


Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)





Site: AC1	Time: 2020/02/23 - 12:47
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

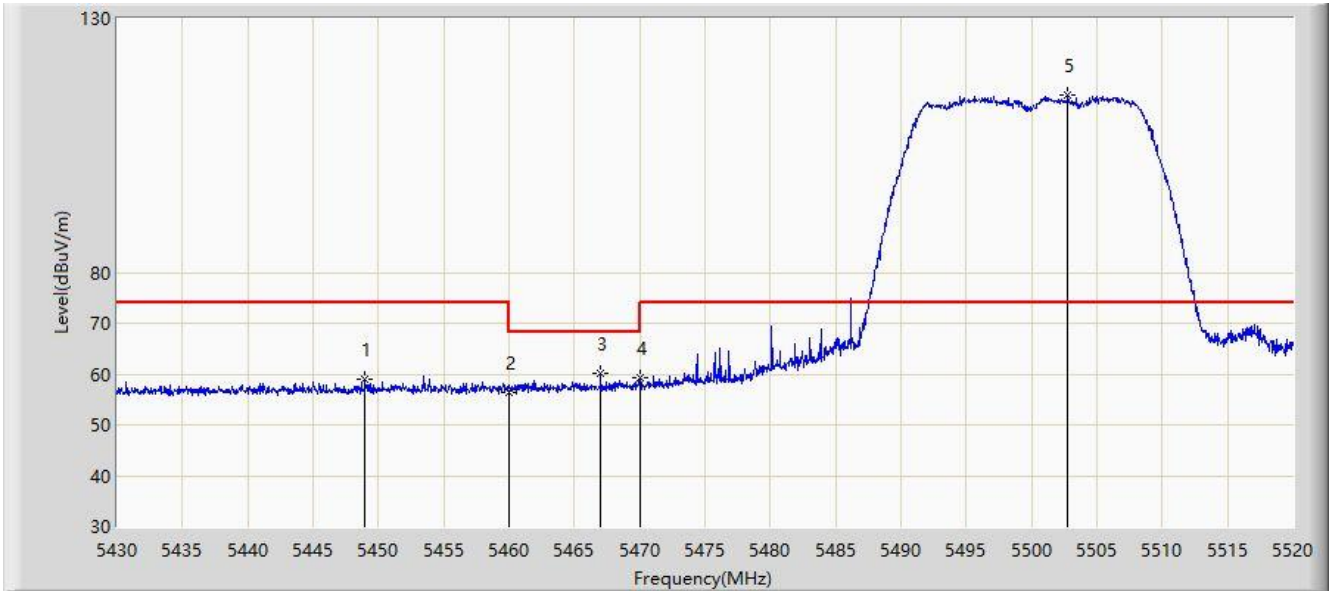


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5448.945	58.972	55.135	-15.028	74.000	3.837	PK
2			5460.000	56.378	52.534	-17.622	74.000	3.844	PK
3			5466.990	60.009	56.160	-8.191	68.200	3.848	PK
4			5470.000	59.211	55.360	-8.989	68.200	3.850	PK
5		*	5502.765	114.900	111.014	N/A	N/A	3.886	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 12:47
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

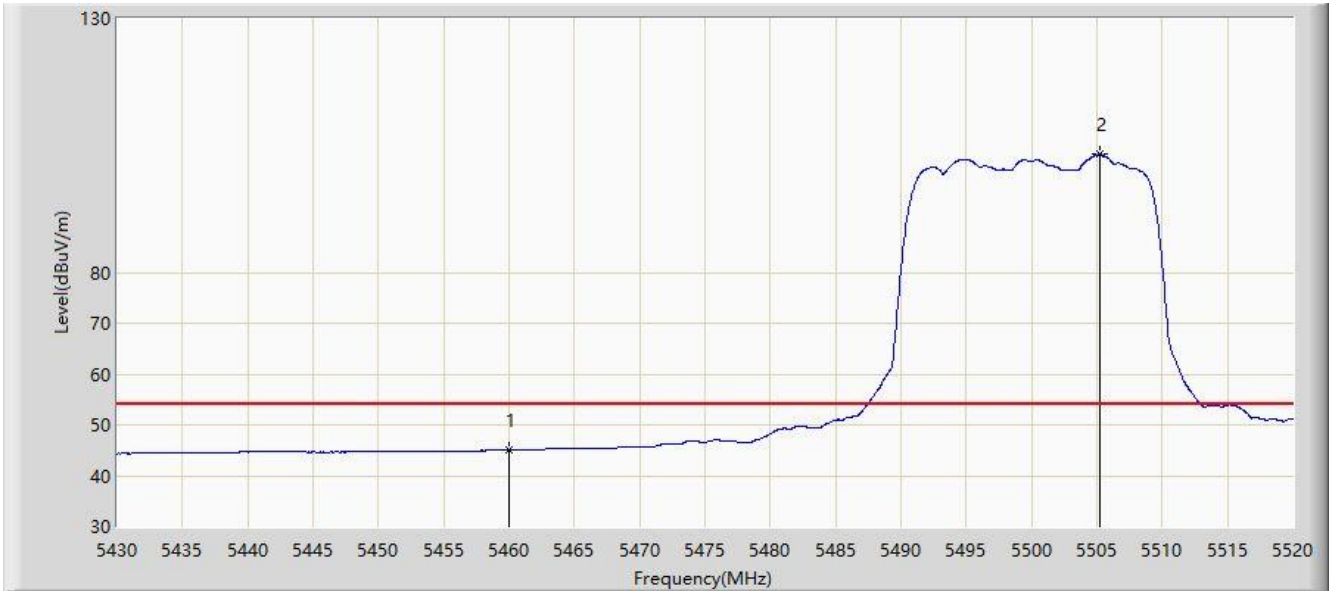


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.020	41.176	-8.980	54.000	3.844	AV
2		*	5505.240	103.211	99.321	N/A	N/A	3.890	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 13:14
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz	

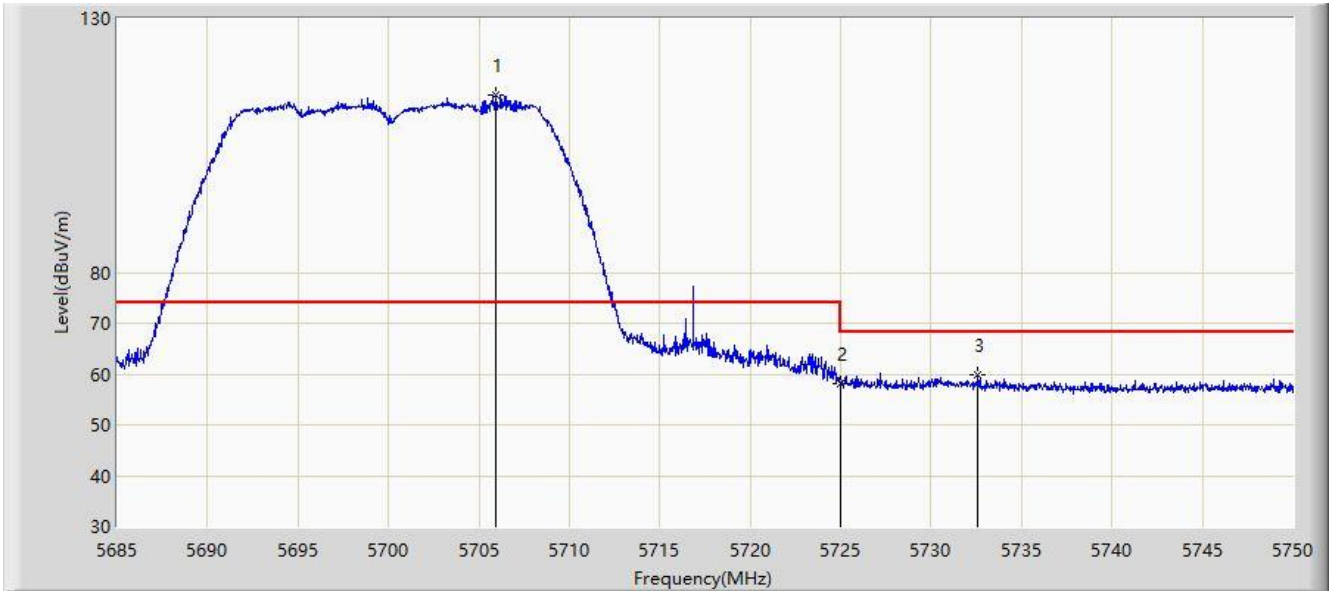


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5705.897	115.000	110.339	N/A	N/A	4.661	PK
2			5725.000	57.992	53.258	-10.208	68.200	4.734	PK
3			5732.580	59.736	54.973	-8.464	68.200	4.763	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 13:16
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz	

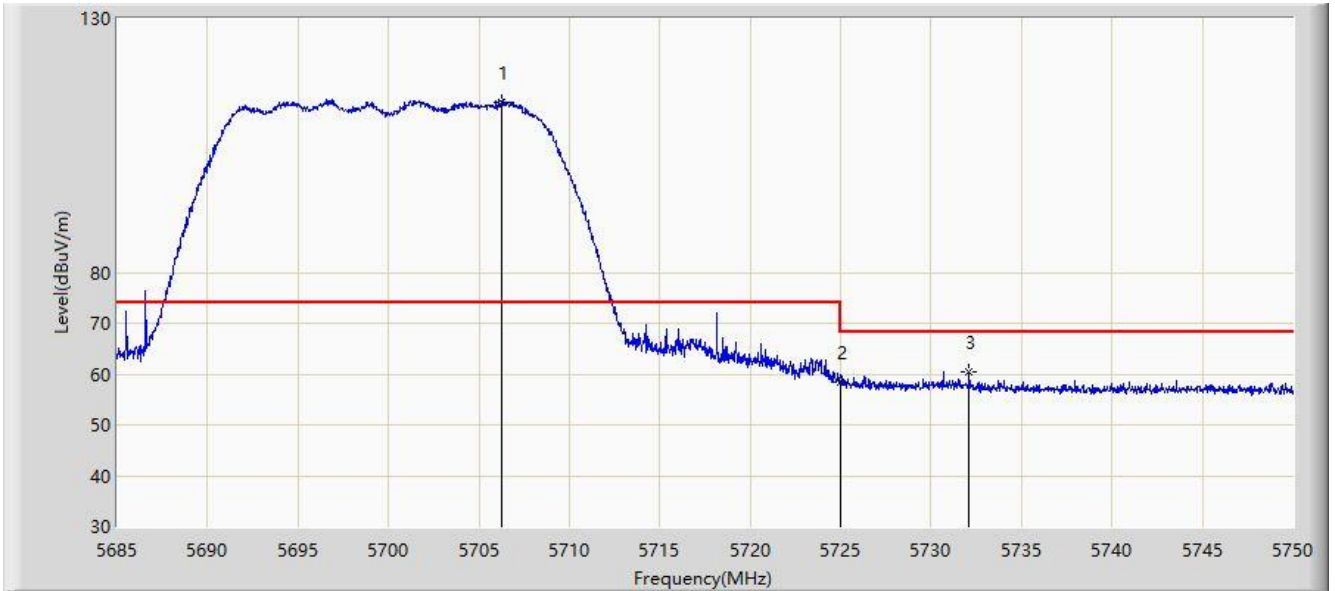


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5706.288	113.532	108.870	N/A	N/A	4.662	PK
2			5725.000	58.290	53.556	-9.910	68.200	4.734	PK
3			5732.092	60.439	55.678	-7.761	68.200	4.762	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/24 - 14:52
Limit: FCC_Part 15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz	

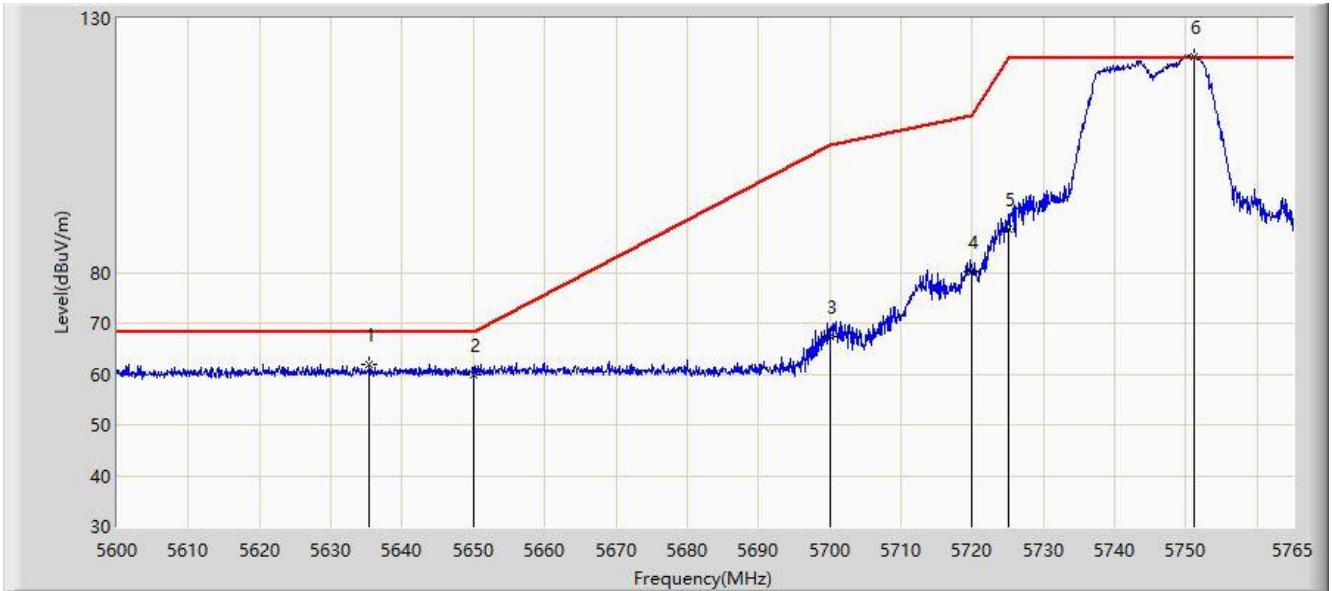


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5635.393	61.862	57.472	-6.338	68.200	4.390	PK
2			5650.000	59.842	55.396	-8.358	68.200	4.446	PK
3			5700.000	67.264	62.626	-37.936	105.200	4.638	PK
4			5720.000	80.098	75.383	-30.702	110.800	4.715	PK
5			5725.000	88.517	83.783	-33.683	122.200	4.734	PK
6		*	5751.058	122.526	117.692	N/A	N/A	4.834	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/24 - 14:54
Limit: FCC_Part 15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz	

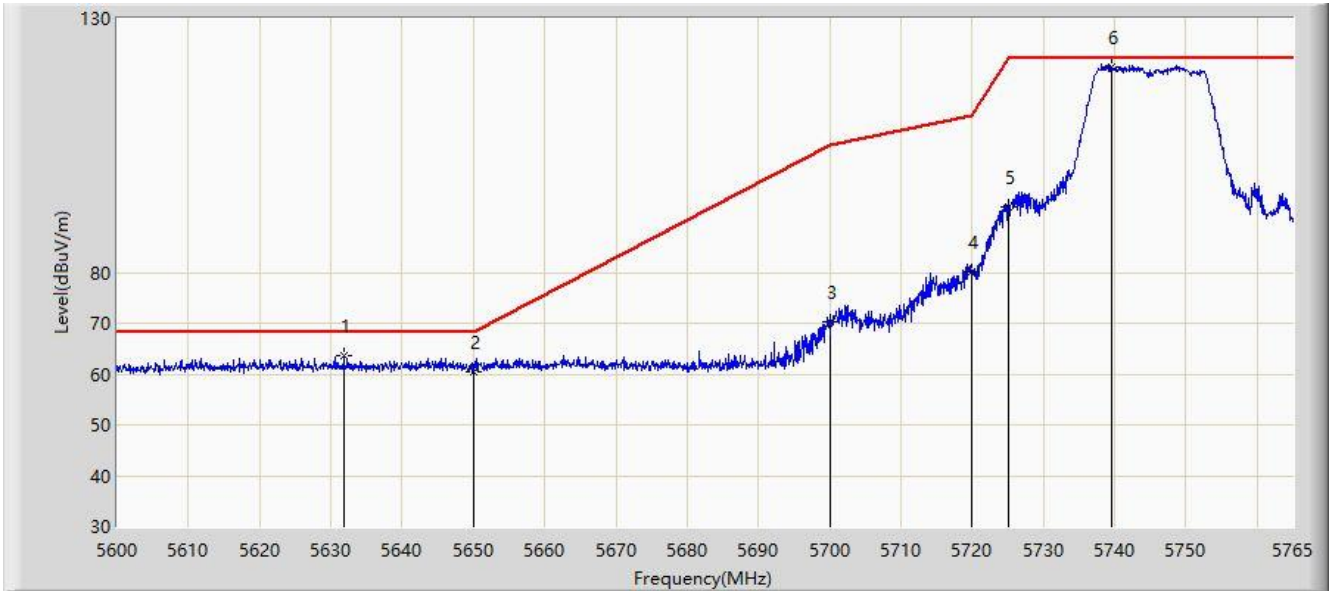


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5631.845	63.720	59.343	-4.480	68.200	4.376	PK
2			5650.000	60.546	56.100	-7.654	68.200	4.446	PK
3			5700.000	70.318	65.680	-34.882	105.200	4.638	PK
4			5720.000	80.211	75.496	-30.589	110.800	4.715	PK
5			5725.000	92.885	88.151	-29.315	122.200	4.734	PK
6		*	5739.507	120.503	115.714	N/A	N/A	4.790	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/24 - 14:56
Limit: FCC_Part 15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz	

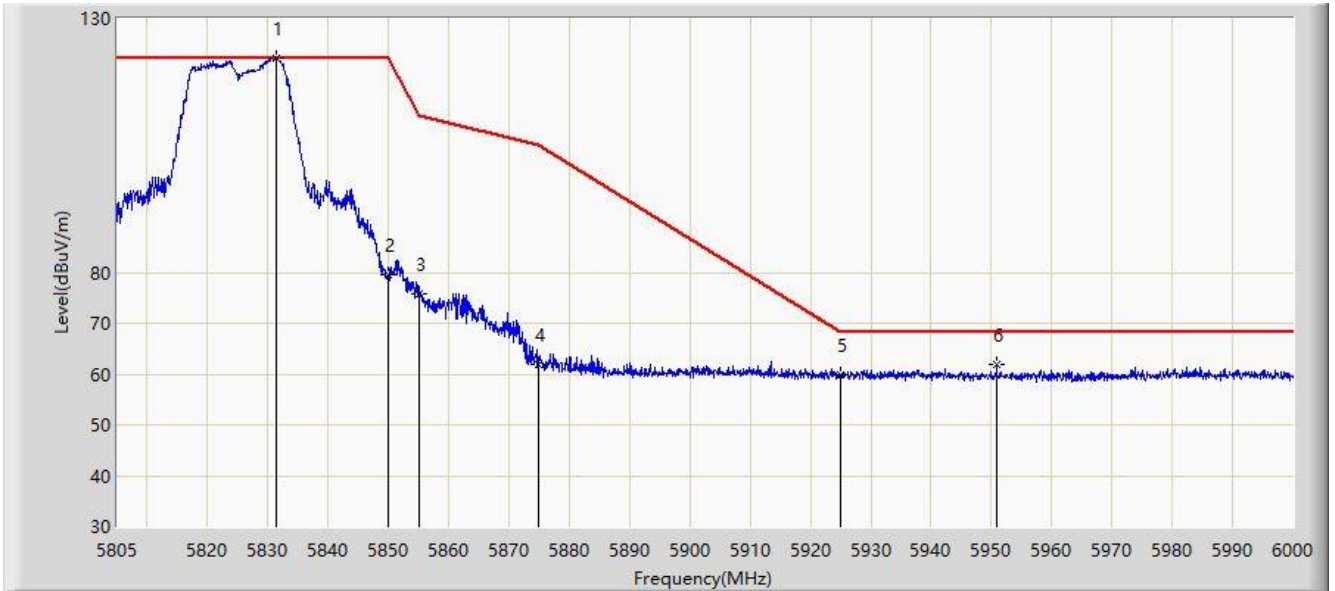


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5831.325	122.149	117.007	N/A	N/A	5.142	PK
2			5850.000	79.580	74.366	-42.620	122.200	5.214	PK
3			5855.000	75.907	70.674	-34.893	110.800	5.233	PK
4			5875.000	61.798	56.488	-43.402	105.200	5.310	PK
5			5925.000	59.751	54.249	-8.449	68.200	5.502	PK
6			5950.860	61.815	56.213	-6.385	68.200	5.602	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/24 - 14:57
Limit: FCC_Part 15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz	

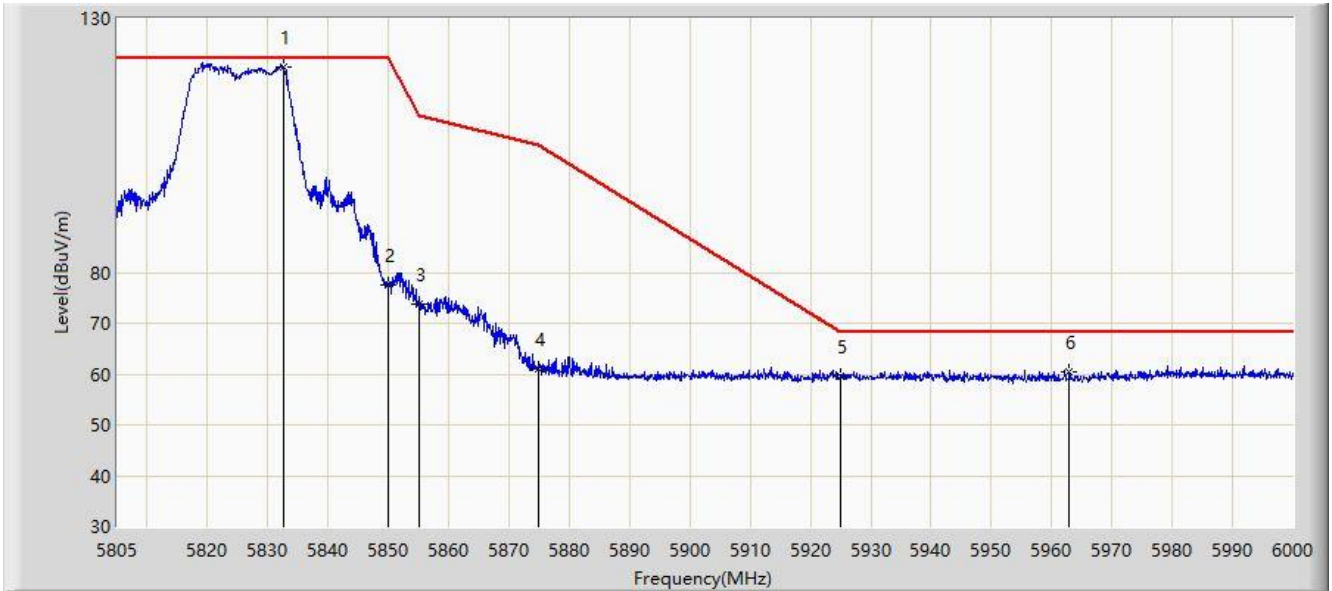

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5832.495	120.543	115.396	N/A	N/A	5.146	PK
2			5850.000	77.453	72.239	-44.747	122.200	5.214	PK
3			5855.000	73.687	68.454	-37.113	110.800	5.233	PK
4			5875.000	60.870	55.560	-44.330	105.200	5.310	PK
5			5925.000	59.435	53.933	-8.765	68.200	5.502	PK
6			5962.950	60.491	54.843	-7.709	68.200	5.648	PK


Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)





Site: AC1	Time: 2020/04/01 - 02:48
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

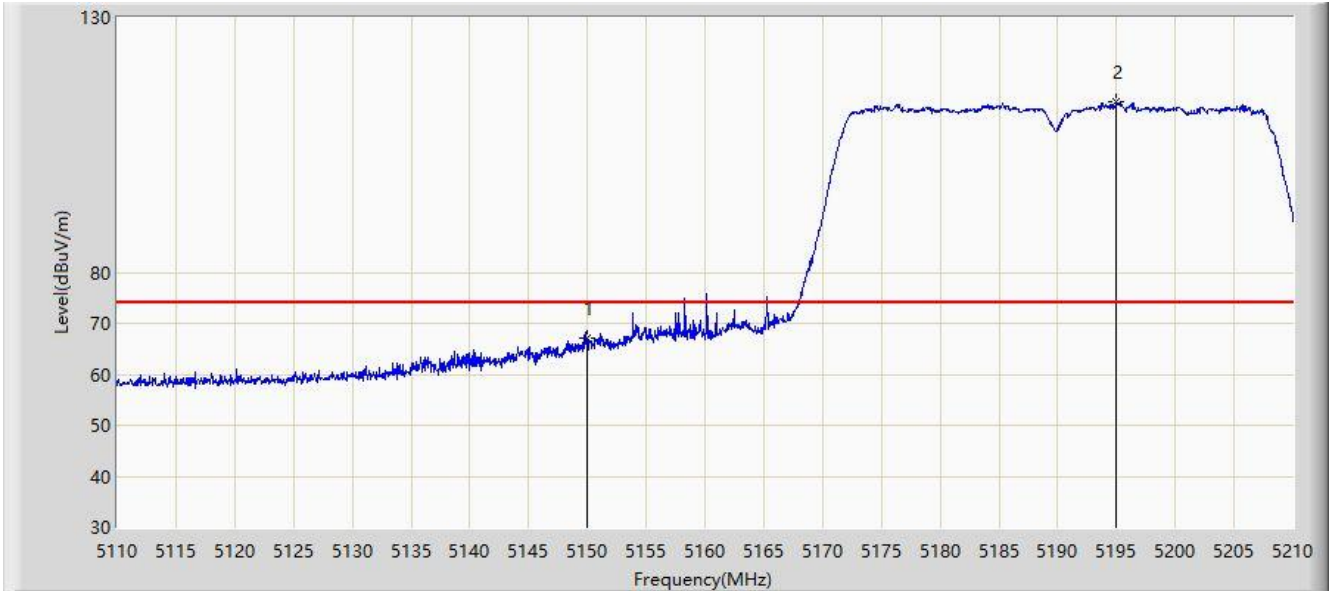


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	66.996	63.350	-7.004	74.000	3.646	PK
2		*	5195.000	113.340	109.665	N/A	N/A	3.675	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/04/01 - 02:44
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

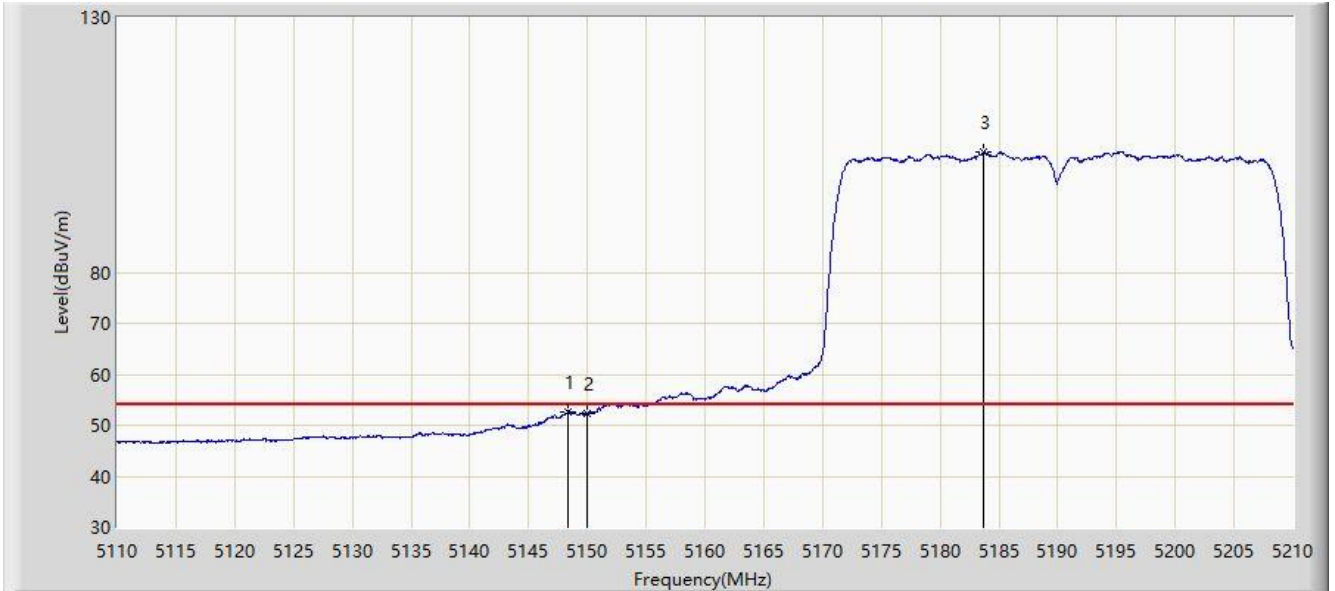


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.300	52.576	48.931	-1.424	54.000	3.645	AV
2			5150.000	52.412	48.766	-1.588	54.000	3.646	AV
3		*	5183.700	103.504	99.837	N/A	N/A	3.668	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/04/01 - 02:51
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

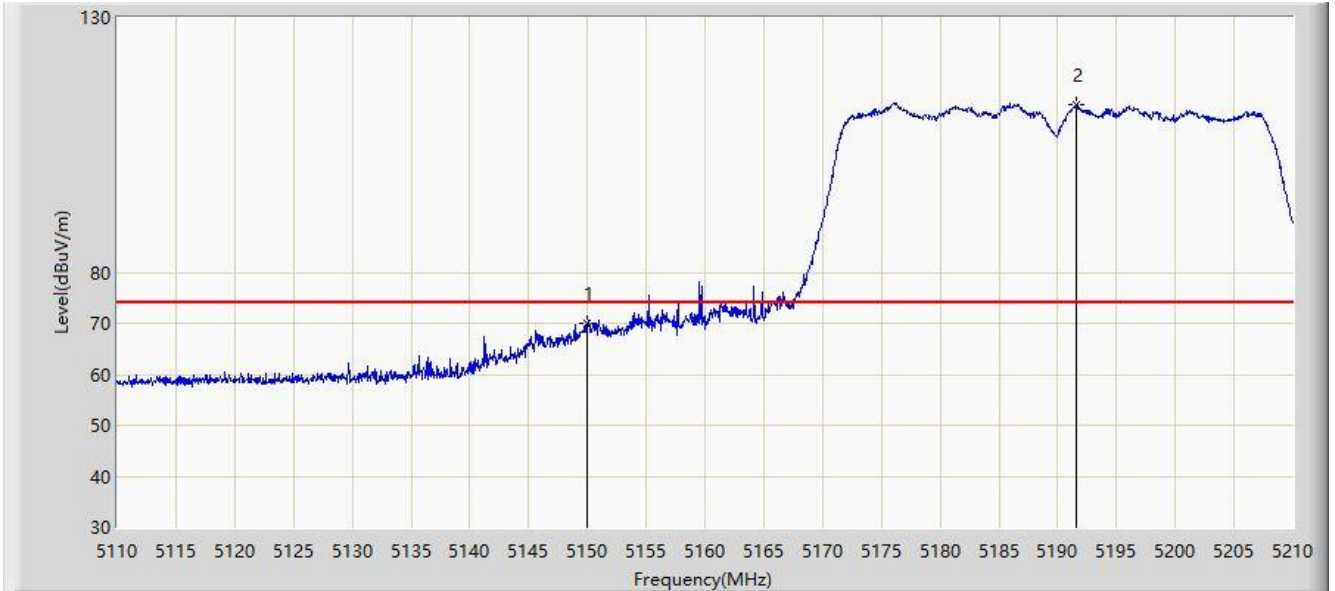


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	69.949	66.303	-4.051	74.000	3.646	PK
2		*	5191.550	112.778	109.105	N/A	N/A	3.673	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/04/01 - 02:53
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

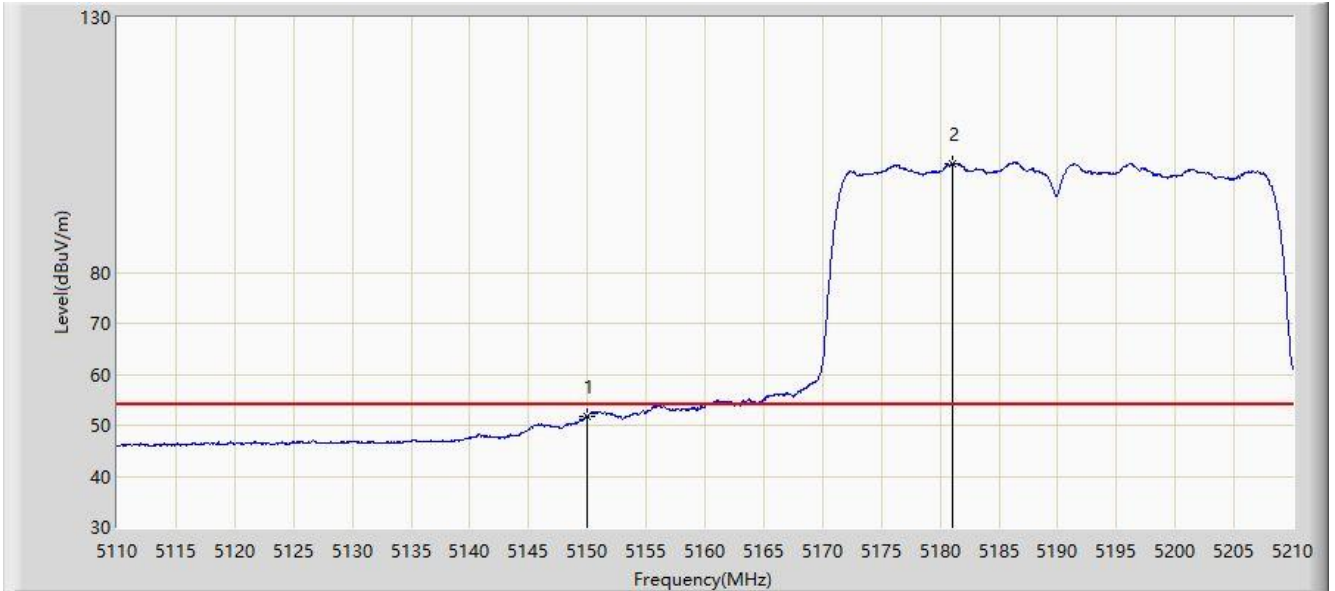


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.761	48.115	-2.239	54.000	3.646	AV
2		*	5181.000	101.346	97.680	N/A	N/A	3.665	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 12:51
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

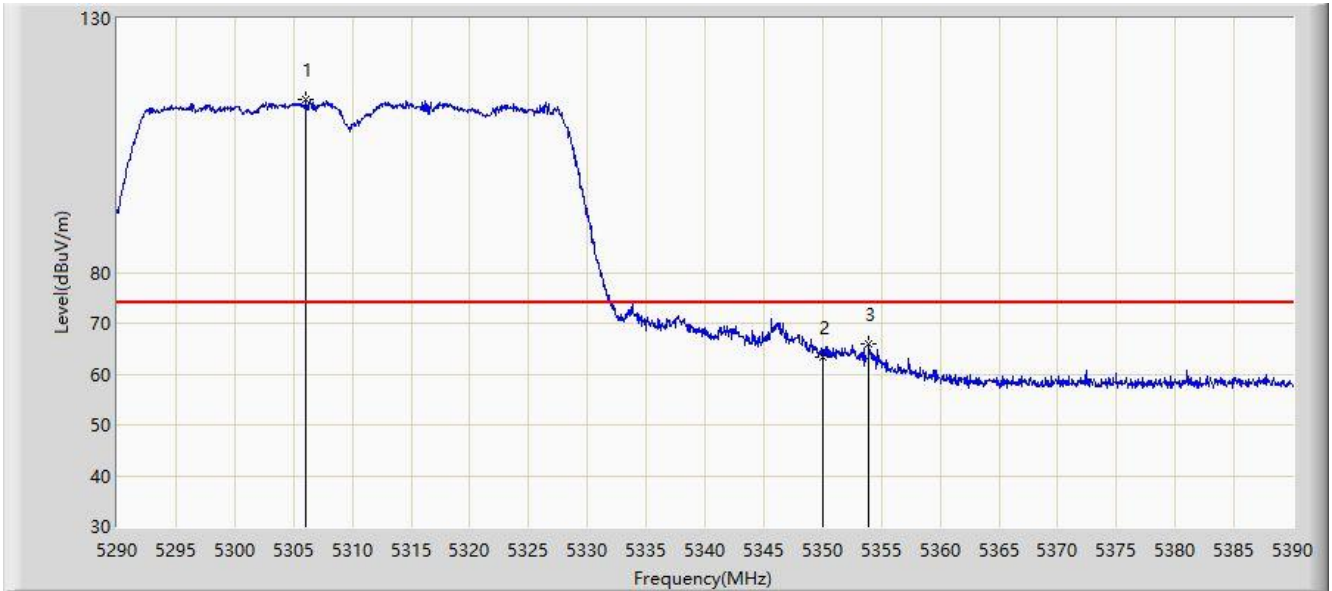


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5306.100	113.956	110.210	N/A	N/A	3.746	PK
2			5350.000	63.409	59.635	-10.591	74.000	3.774	PK
3			5353.950	65.987	62.211	-8.013	74.000	3.777	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/23 - 12:54
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

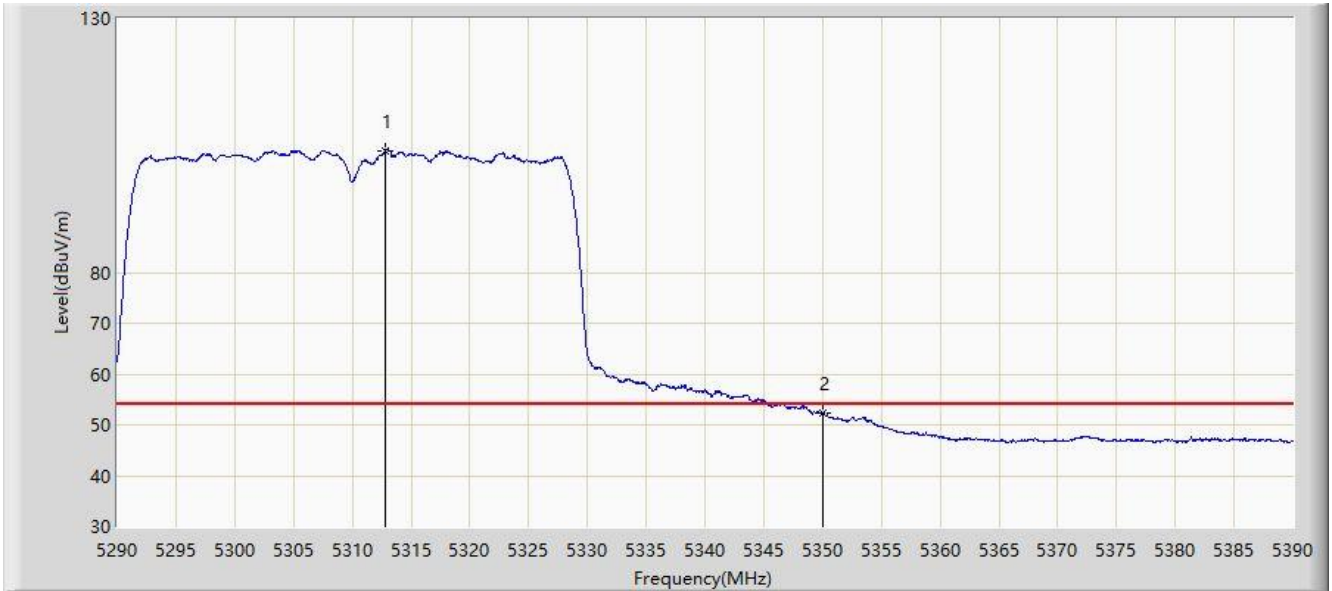


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5312.800	103.974	100.224	N/A	N/A	3.750	AV
2			5350.000	52.242	48.468	-1.758	54.000	3.774	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 12:57
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

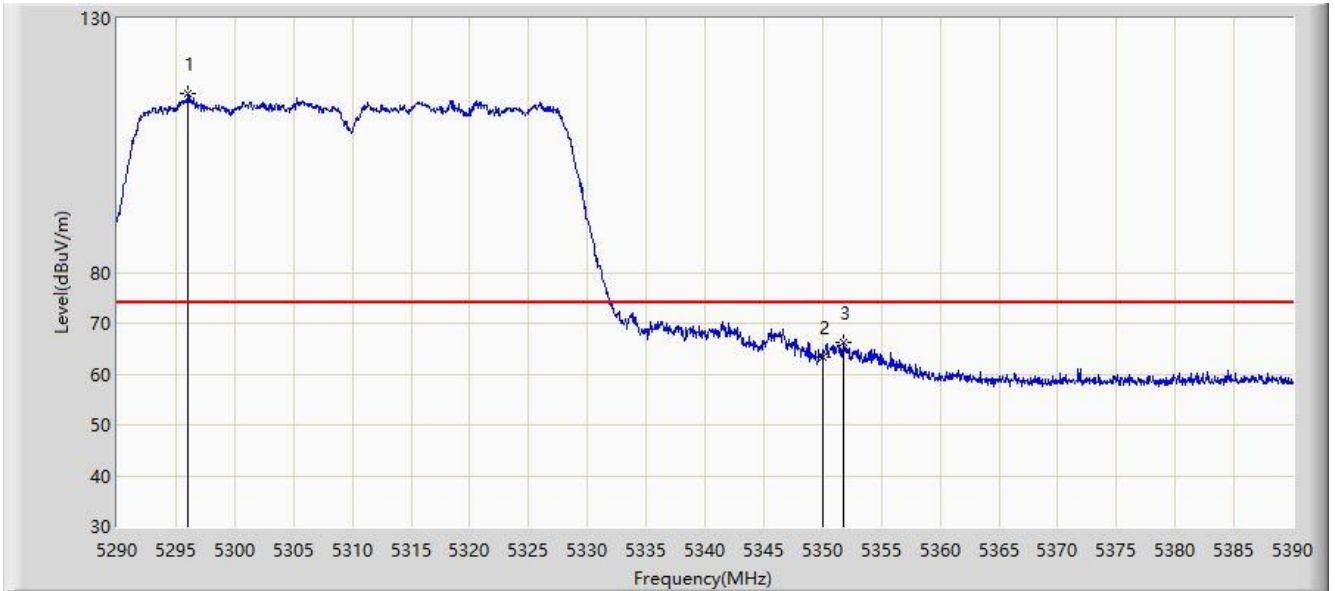


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5296.050	115.103	111.364	N/A	N/A	3.739	PK
2			5350.000	63.315	59.541	-10.685	74.000	3.774	PK
3			5351.800	66.125	62.350	-7.875	74.000	3.775	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/23 - 12:58
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

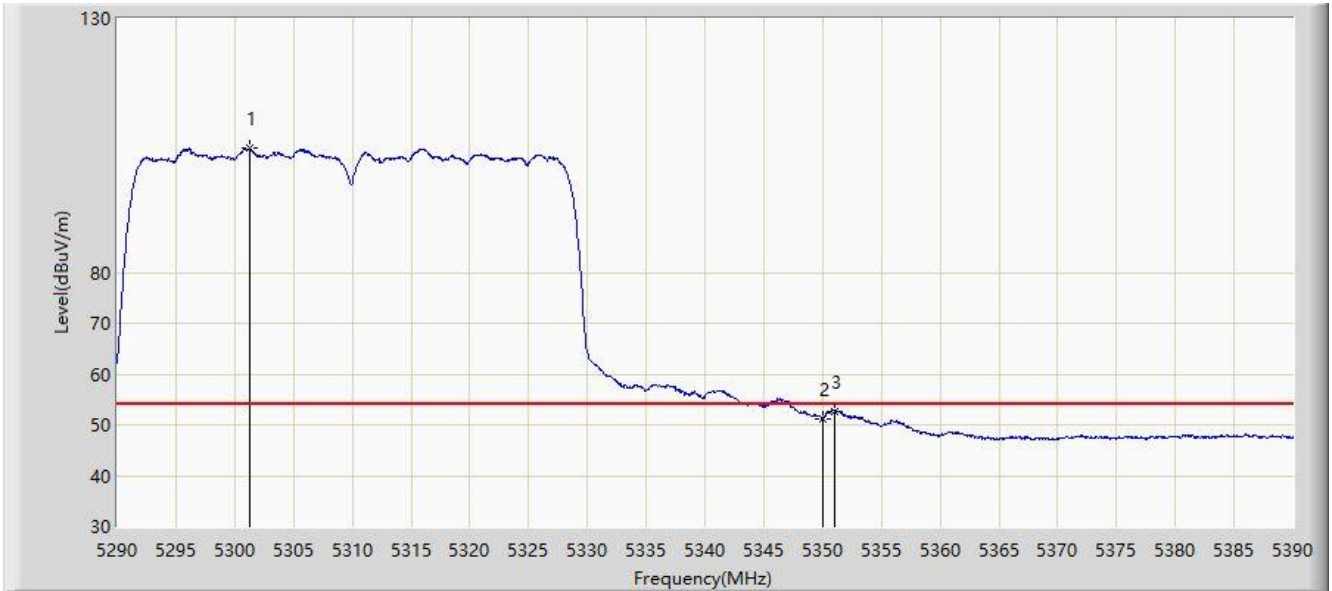

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5301.250	104.386	100.643	N/A	N/A	3.743	AV
2			5350.000	51.225	47.451	-2.775	54.000	3.774	AV
3			5351.050	52.600	48.826	-1.400	54.000	3.774	AV


Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)





Site: AC1	Time: 2020/02/23 - 13:01
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

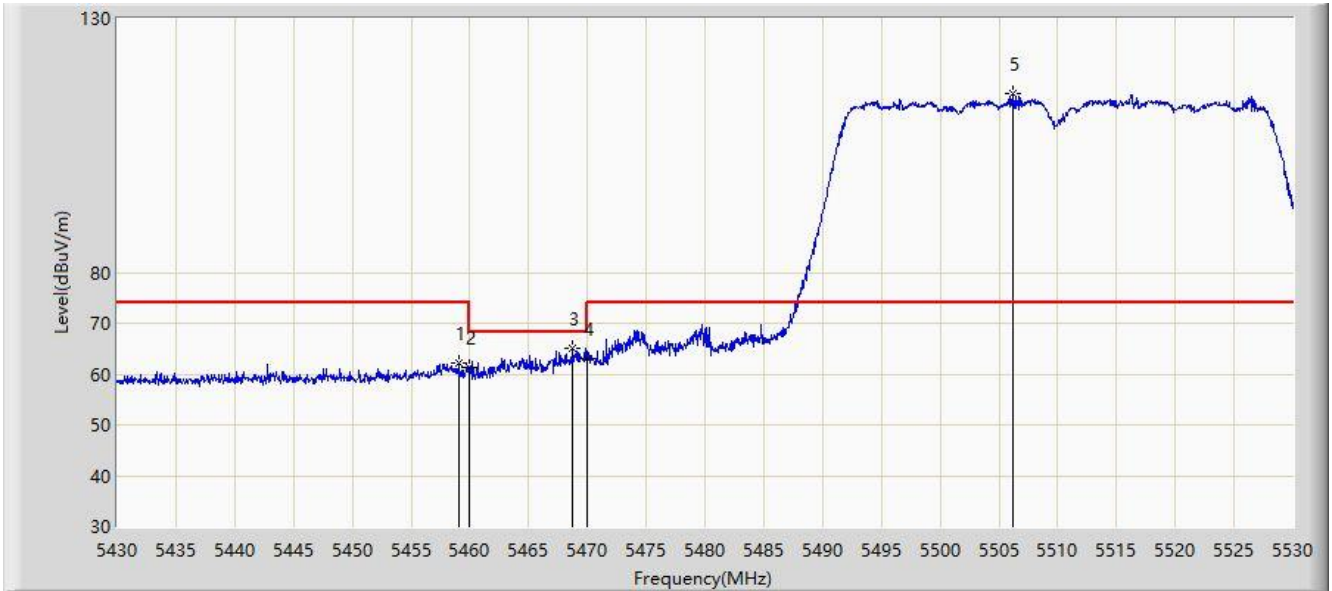


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.050	62.128	58.285	-11.872	74.000	3.843	PK
2			5460.000	61.229	57.385	-12.771	74.000	3.844	PK
3			5468.750	65.075	61.225	-3.125	68.200	3.850	PK
4			5470.000	62.991	59.140	-5.209	68.200	3.850	PK
5		*	5506.150	115.128	111.234	N/A	N/A	3.893	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 13:03
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

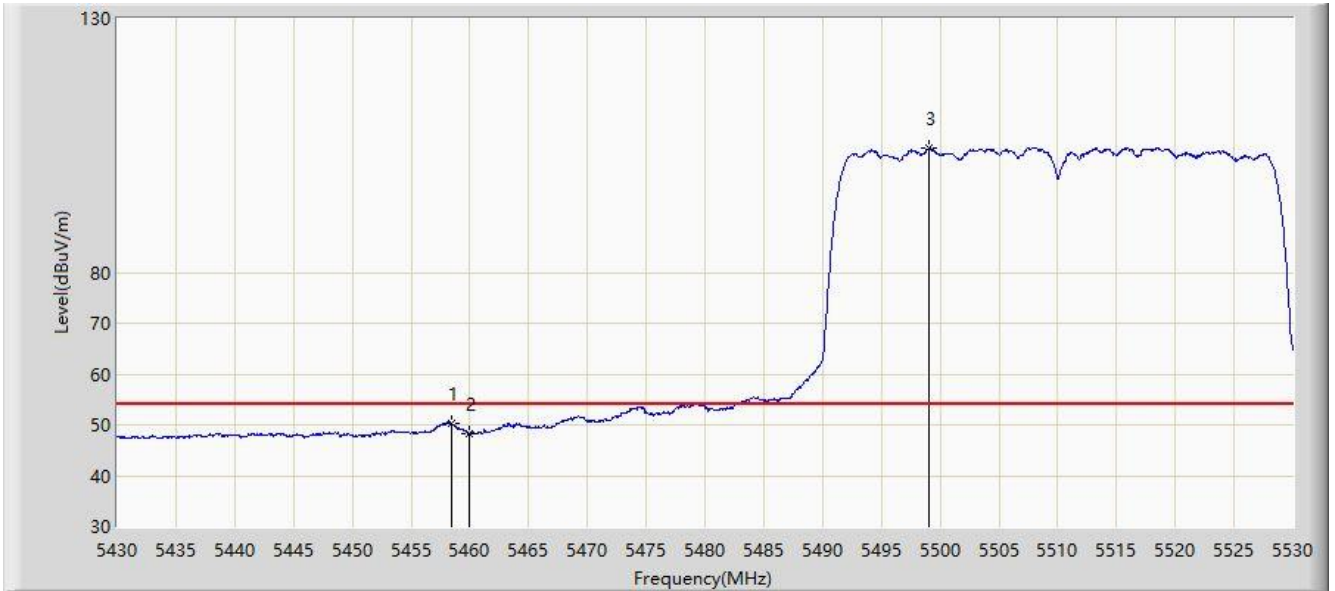


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.400	50.429	46.586	-3.571	54.000	3.843	AV
2			5460.000	48.206	44.362	-5.794	54.000	3.844	AV
3		*	5499.050	104.424	100.544	N/A	N/A	3.880	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 13:05
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

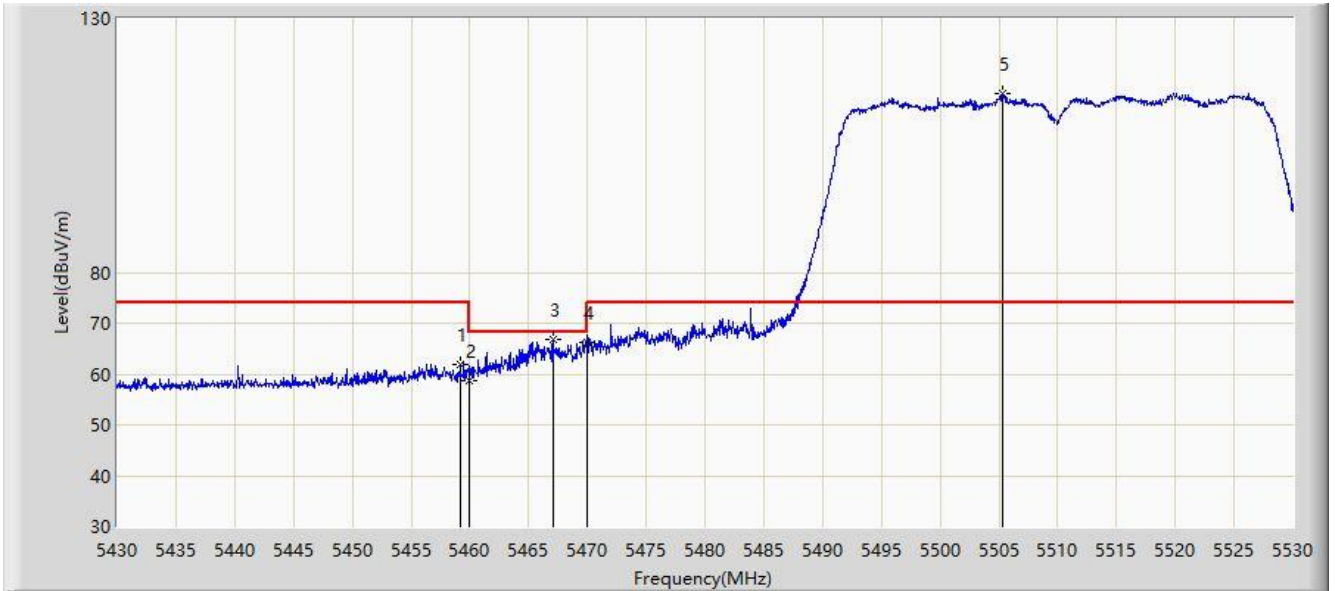


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.200	61.835	57.992	-12.165	74.000	3.843	PK
2			5460.000	58.687	54.843	-15.313	74.000	3.844	PK
3			5467.050	66.801	62.952	-1.399	68.200	3.848	PK
4			5470.000	66.279	62.428	-1.921	68.200	3.850	PK
5		*	5505.300	115.077	111.186	N/A	N/A	3.891	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 13:05
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

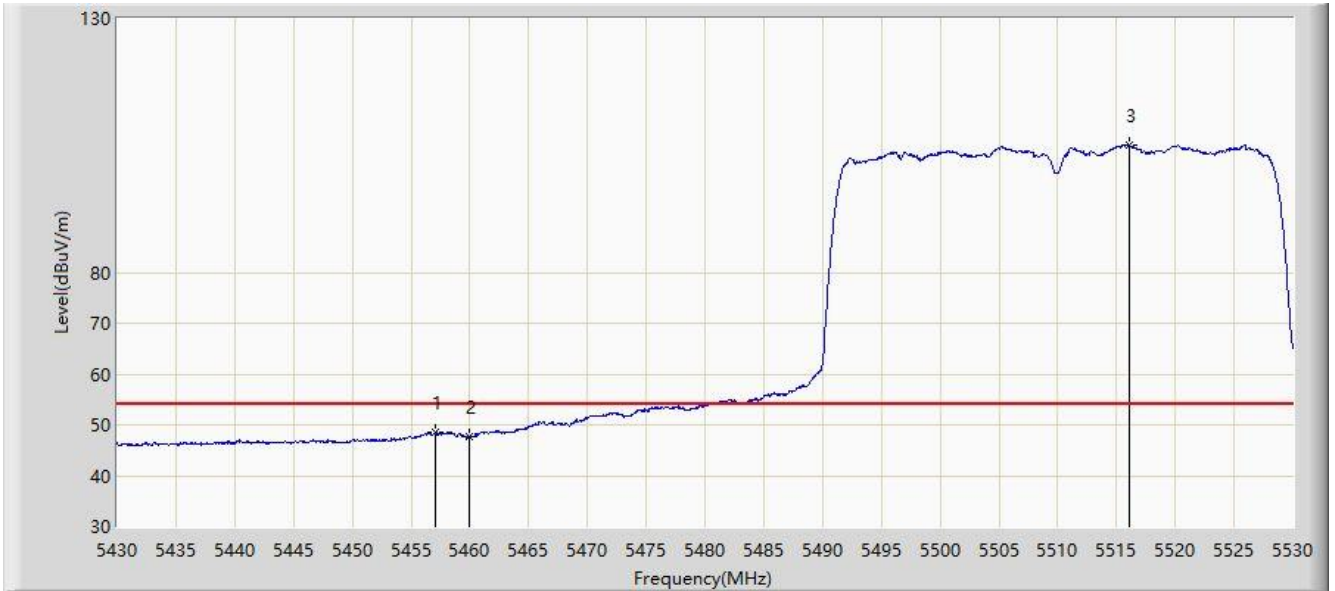


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.050	48.506	44.664	-5.494	54.000	3.842	AV
2			5460.000	47.597	43.753	-6.403	54.000	3.844	AV
3		*	5516.100	105.190	101.258	N/A	N/A	3.932	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 13:09
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz	

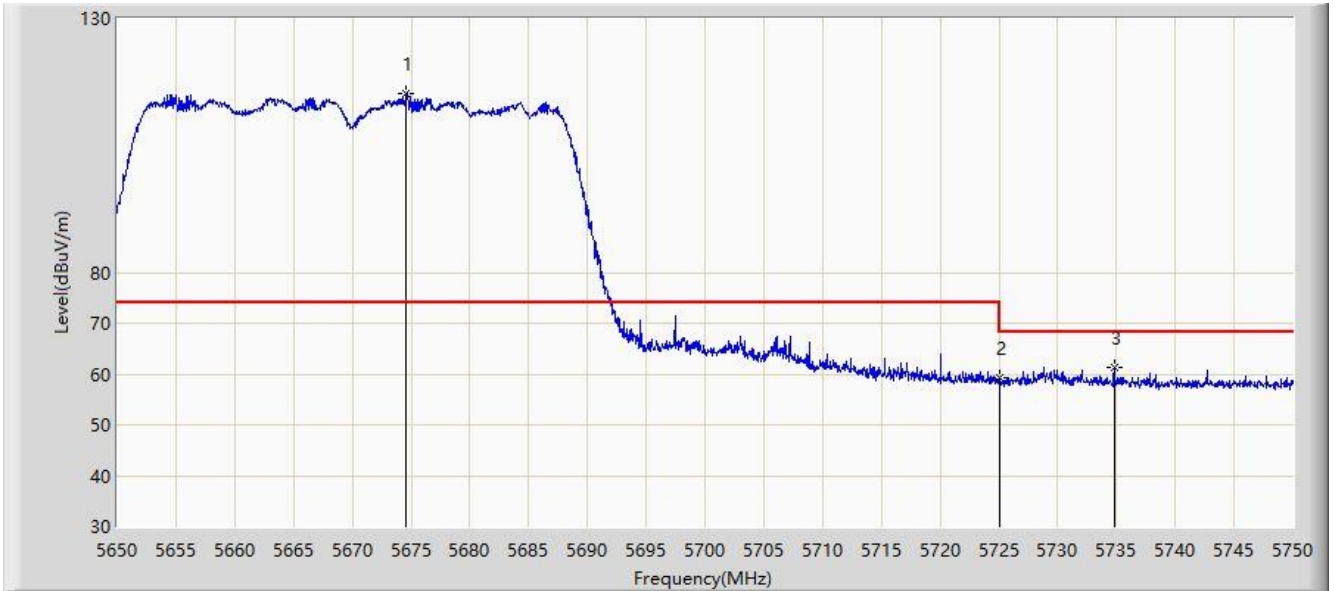


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5674.600	115.238	110.697	N/A	N/A	4.541	PK
2			5725.000	59.317	54.583	-8.883	68.200	4.734	PK
3			5734.800	61.247	56.476	-6.953	68.200	4.772	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 13:11
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz	

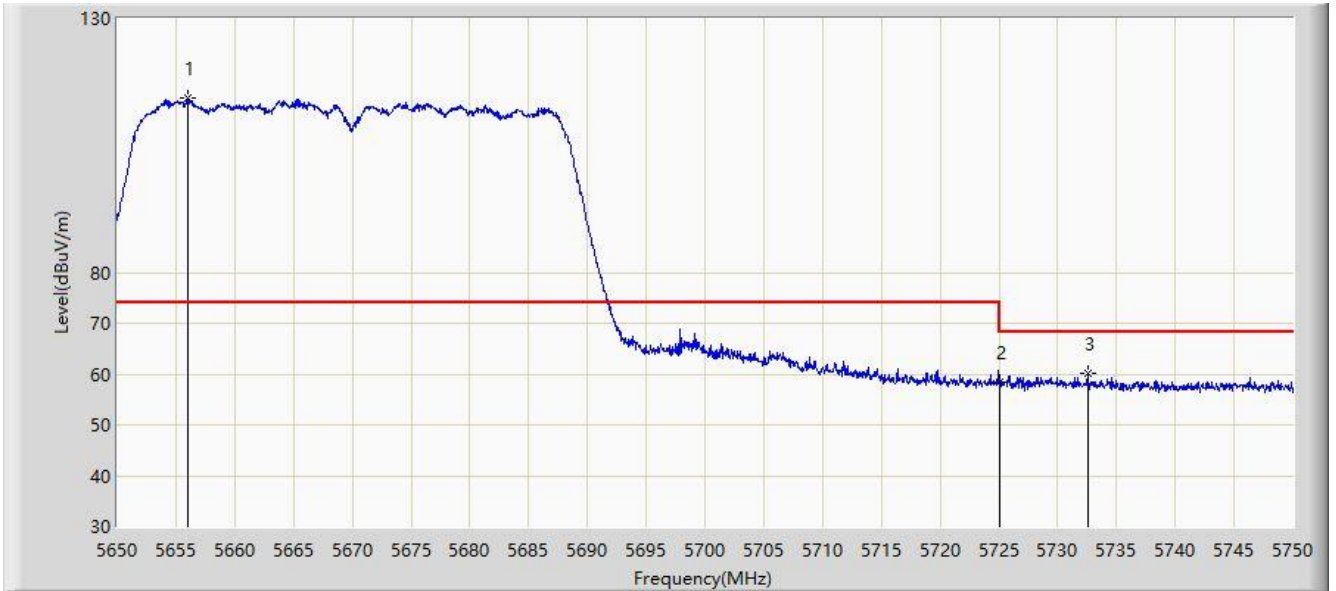


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5656.050	114.478	110.008	N/A	N/A	4.470	PK
2			5725.000	58.548	53.814	-9.652	68.200	4.734	PK
3			5732.550	60.056	55.293	-8.144	68.200	4.763	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/24 - 15:10
Limit: FCC_Part 15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz	

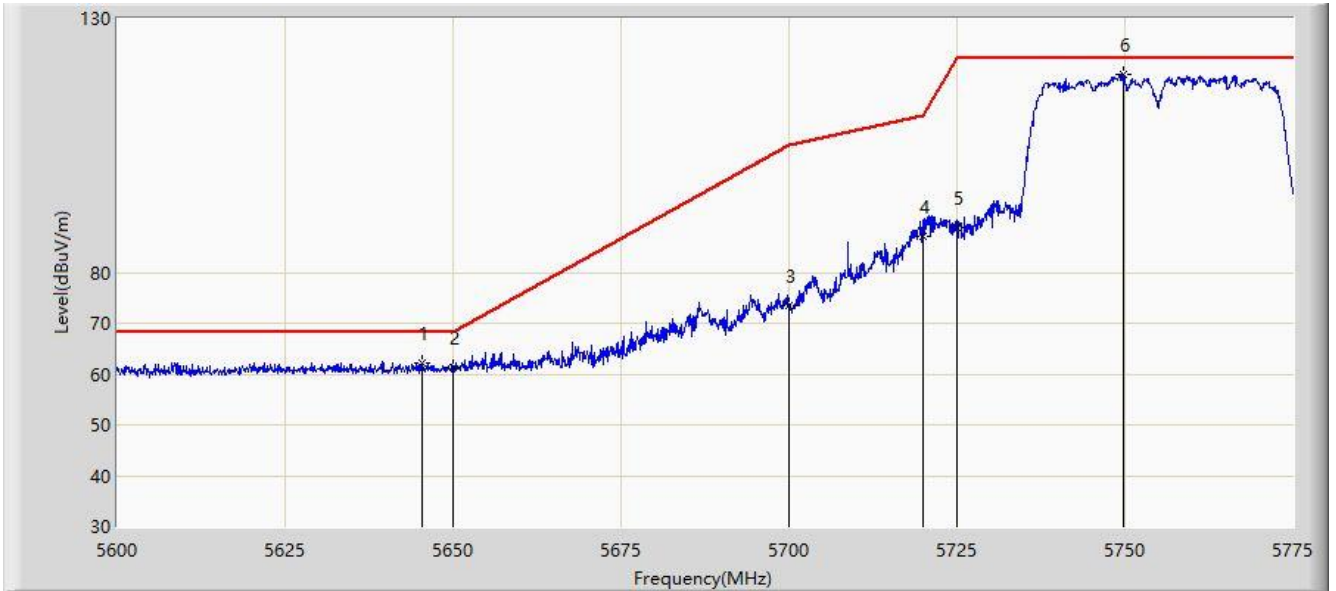


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5645.325	62.171	57.743	-6.029	68.200	4.428	PK
2			5650.000	61.329	56.883	-6.871	68.200	4.446	PK
3			5700.000	73.336	68.698	-31.864	105.200	4.638	PK
4			5720.000	86.961	82.246	-23.839	110.800	4.715	PK
5			5725.000	88.781	84.047	-33.419	122.200	4.734	PK
6		*	5749.800	119.121	114.292	-3.079	N/A	N/A	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/24 - 15:14
Limit: FCC_Part 15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz	

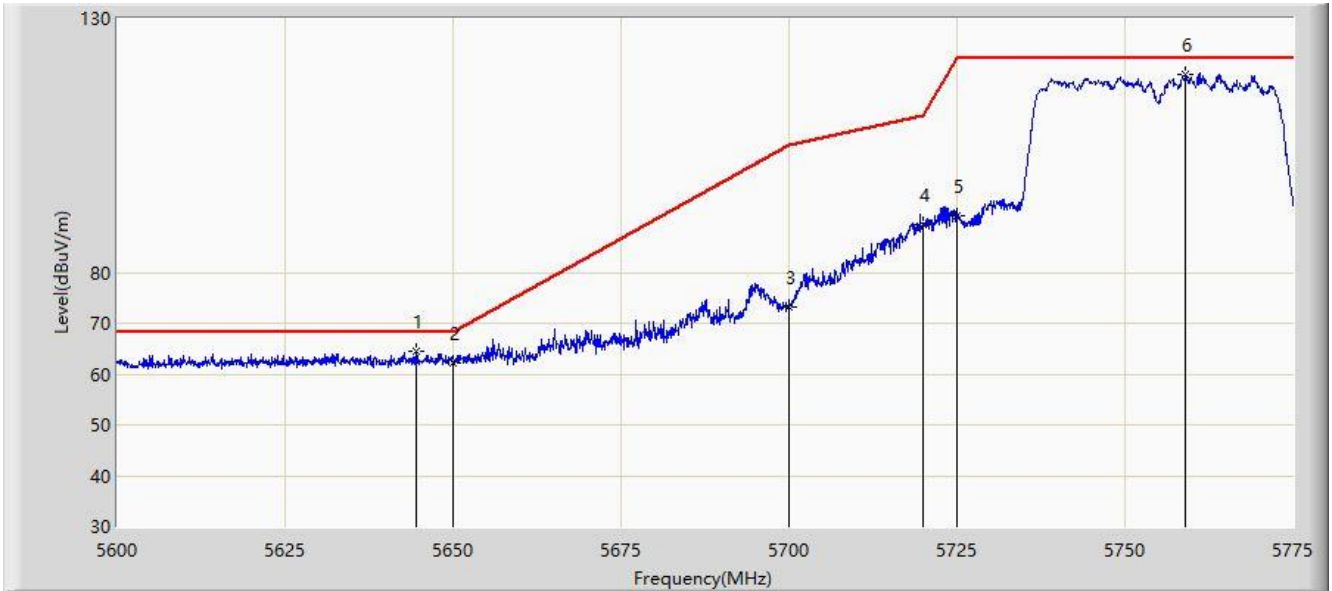

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5644.450	64.368	59.943	-3.832	68.200	4.425	PK
2			5650.000	62.228	57.782	-5.972	68.200	4.446	PK
3			5700.000	73.320	68.682	-31.880	105.200	4.638	PK
4			5720.000	89.354	84.639	-21.446	110.800	4.715	PK
5			5725.000	91.120	86.386	-31.080	122.200	4.734	PK
6		*	5759.075	119.005	114.141	N/A	N/A	4.864	PK


Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)





Site: AC1	Time: 2020/02/24 - 15:15
Limit: FCC_Part 15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz	

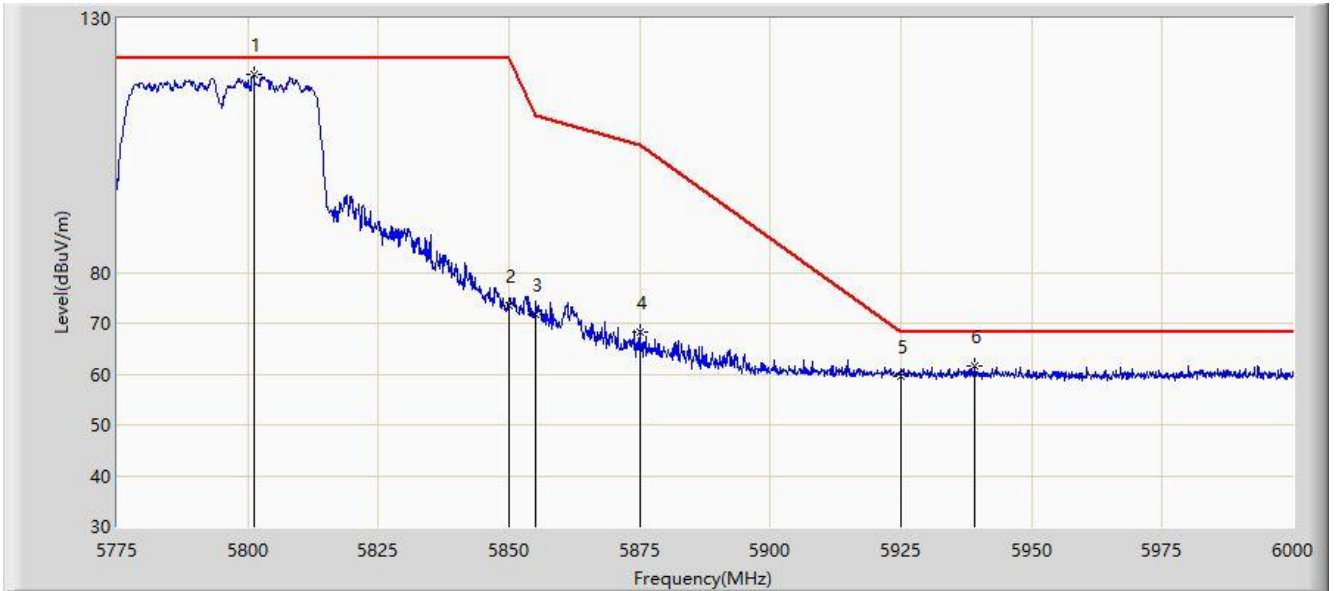


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5801.212	118.995	113.968	N/A	N/A	5.026	PK
2			5850.000	73.591	68.377	-48.609	122.200	5.214	PK
3			5855.000	71.639	66.406	-39.161	110.800	5.233	PK
4			5875.000	68.152	62.842	-37.048	105.200	5.310	PK
5			5925.000	59.656	54.154	-8.544	68.200	5.502	PK
6			5939.138	61.534	55.977	-6.666	68.200	5.557	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/24 - 15:17
Limit: FCC_Part 15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz	

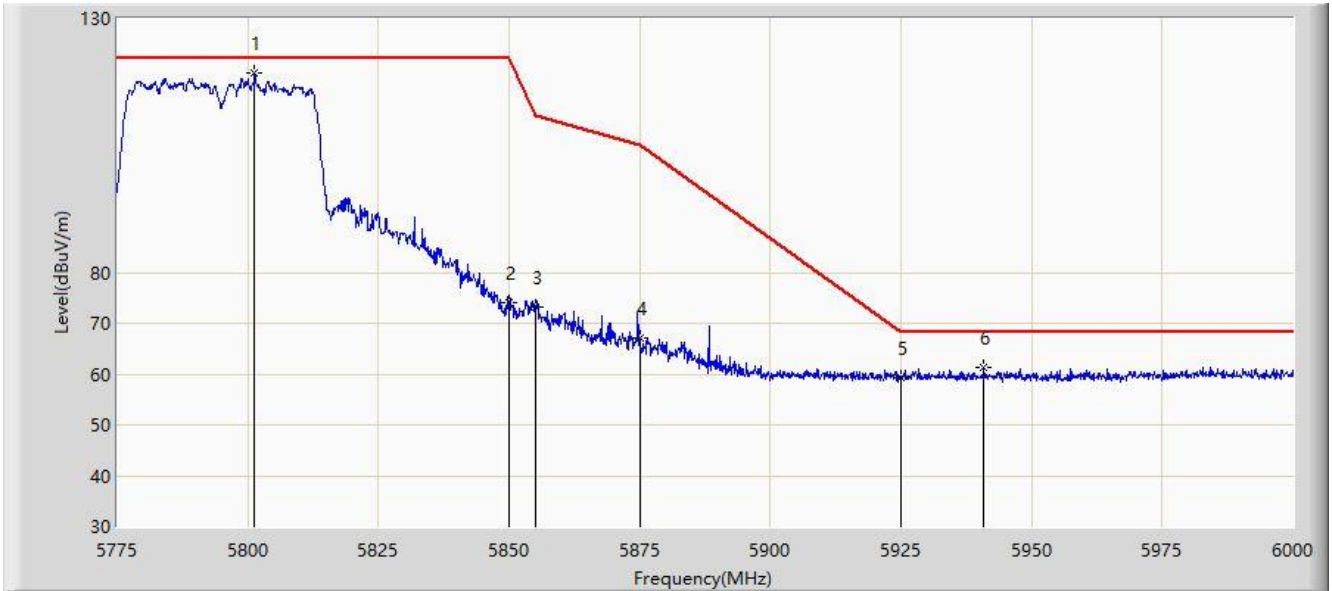


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5801.325	119.372	114.345	N/A	N/A	5.027	PK
2			5850.000	73.917	68.703	-48.283	122.200	5.214	PK
3			5855.000	73.291	68.058	-37.509	110.800	5.233	PK
4			5875.000	67.071	61.761	-38.129	105.200	5.310	PK
5			5925.000	59.277	53.775	-8.923	68.200	5.502	PK
6			5940.825	61.219	55.656	-6.981	68.200	5.564	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/04/01 - 03:06
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

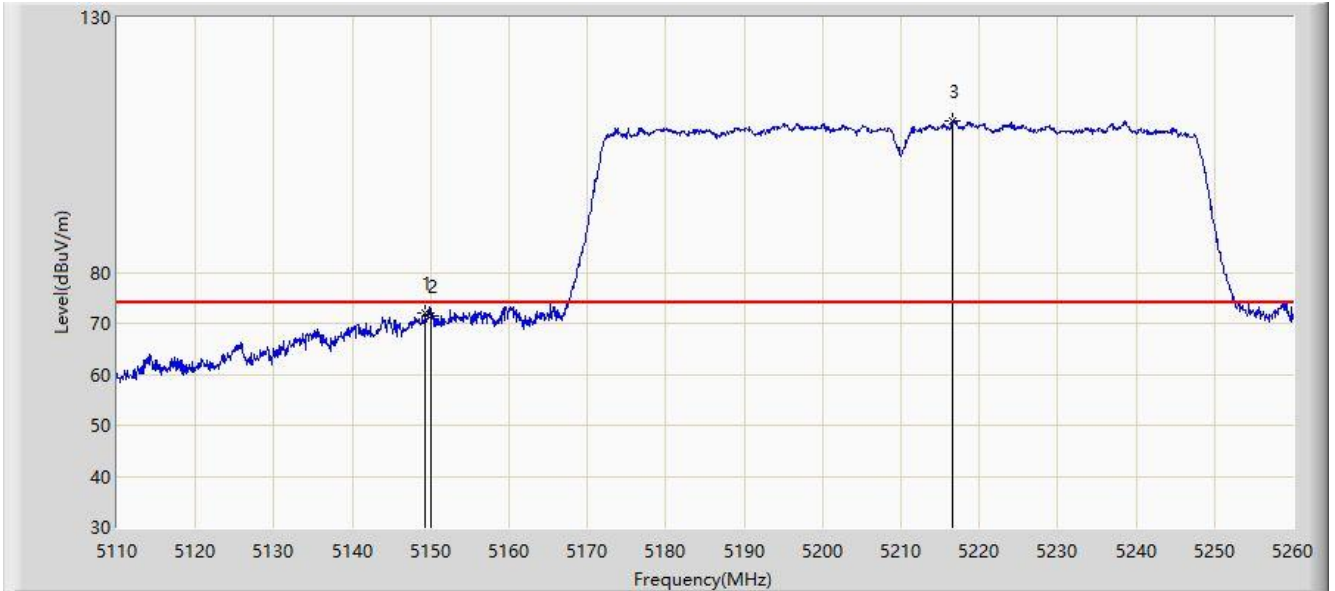


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.300	72.117	68.471	-1.883	74.000	3.646	PK
2			5150.000	71.530	67.884	-2.470	74.000	3.646	PK
3		*	5216.650	109.721	106.032	N/A	N/A	3.689	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/04/01 - 03:04
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

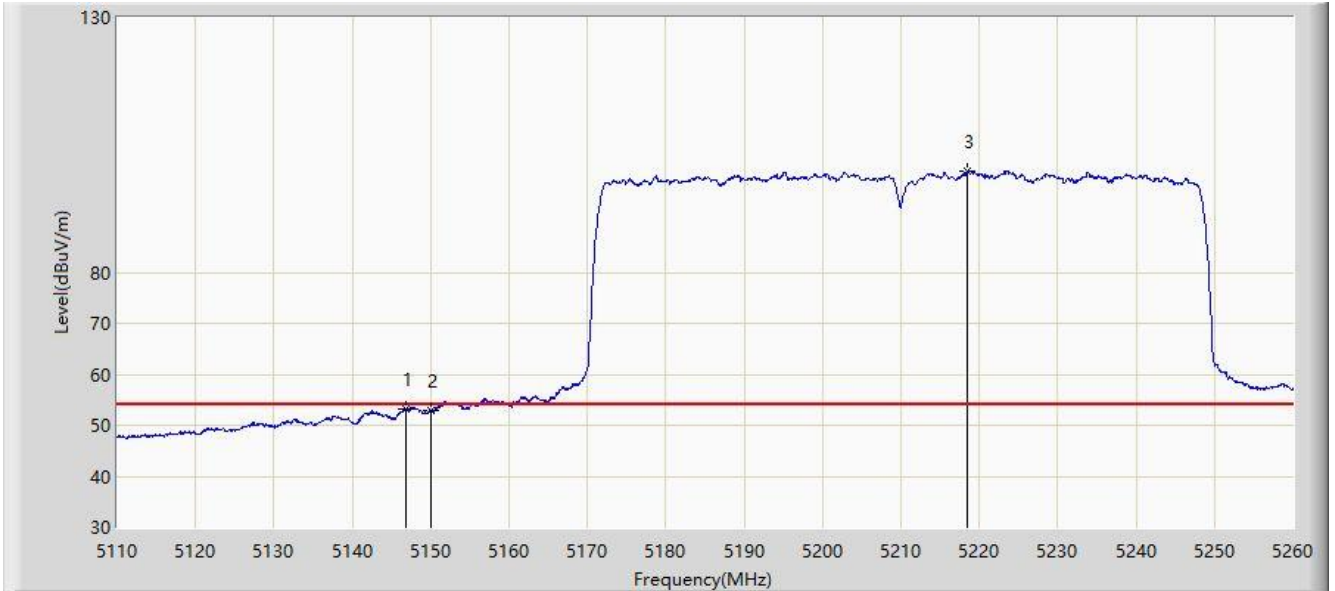


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.900	53.253	49.609	-0.747	54.000	3.644	AV
2			5150.000	52.844	49.198	-1.156	54.000	3.646	AV
3		*	5218.525	99.856	96.166	N/A	N/A	3.690	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/04/01 - 03:09
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

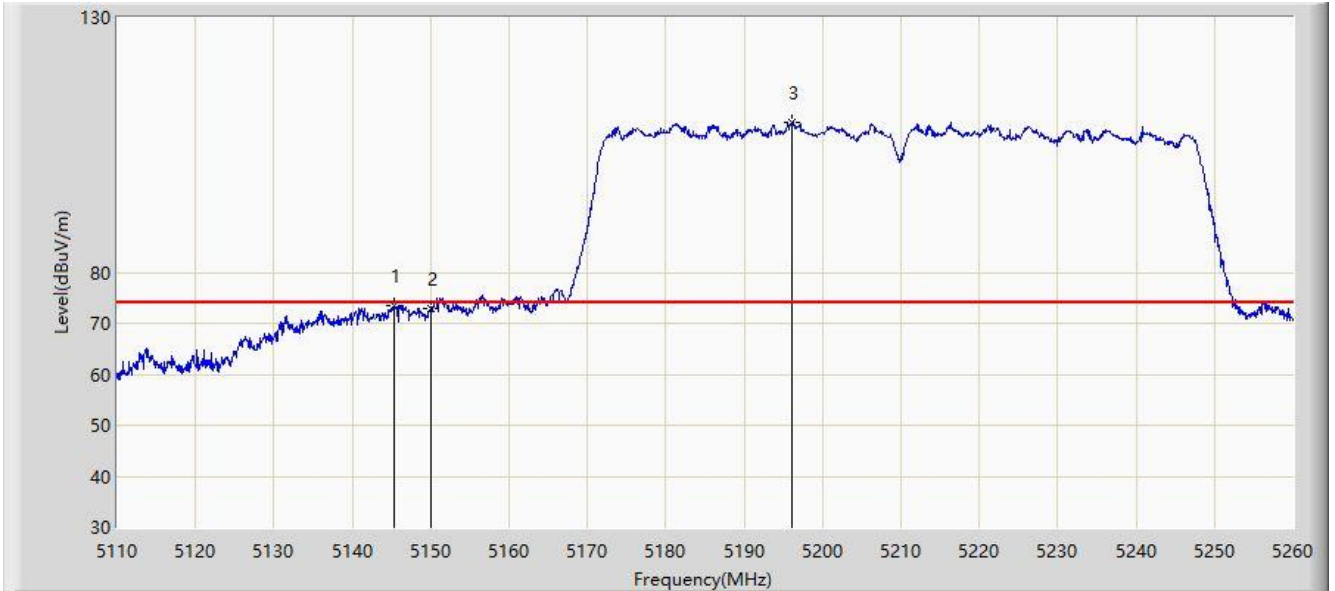


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.325	73.491	69.848	-0.509	74.000	3.643	PK
2			5150.000	72.932	69.286	-1.068	74.000	3.646	PK
3		*	5196.025	109.319	105.643	N/A	N/A	3.675	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/04/01 - 03:11
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

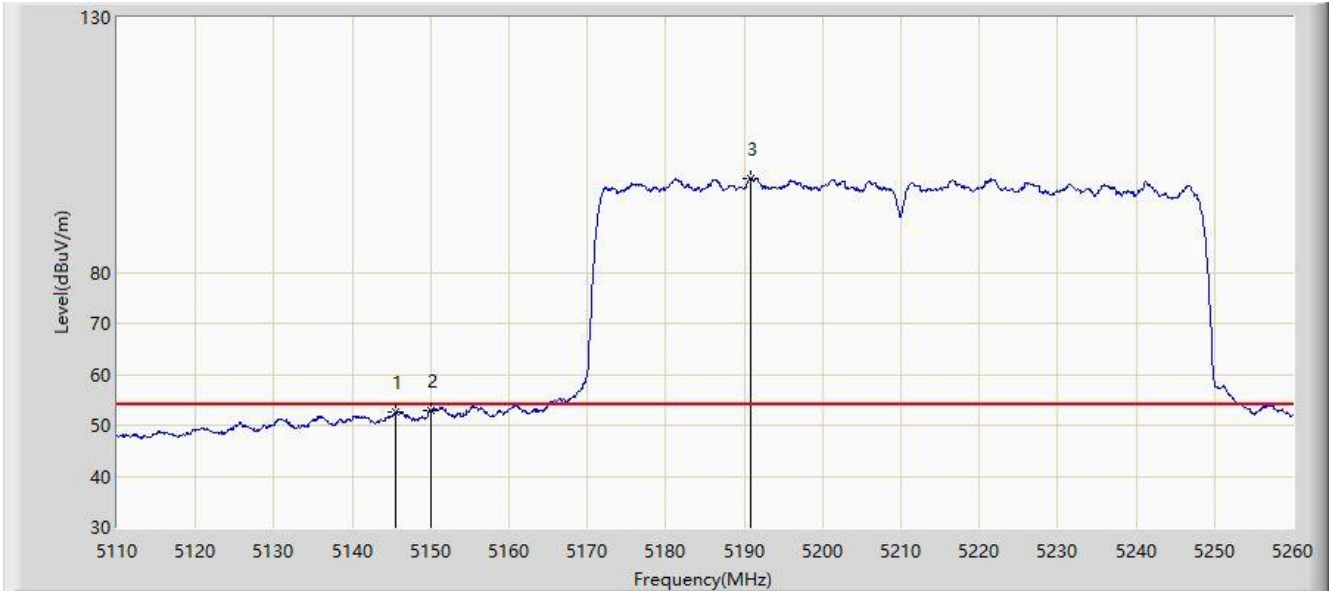


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.550	52.547	48.904	-1.453	54.000	3.644	AV
2			5150.000	52.820	49.174	-1.180	54.000	3.646	AV
3		*	5190.775	98.483	94.811	N/A	N/A	3.672	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/01 - 23:50
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

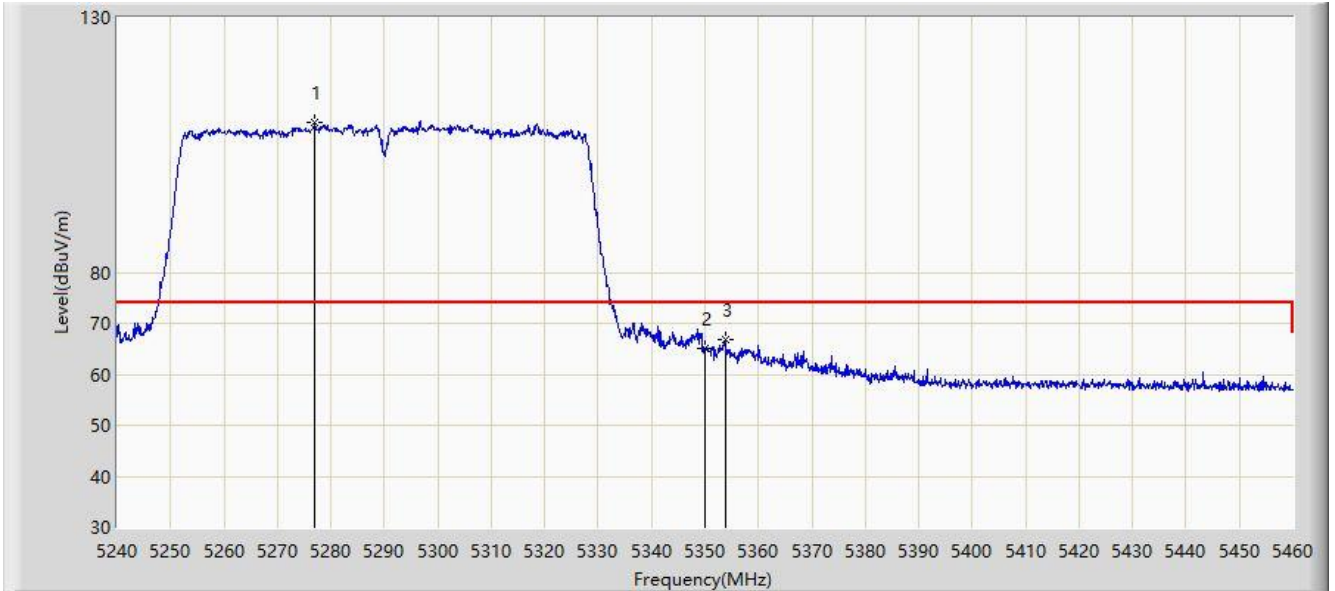


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5277.070	109.375	105.648	N/A	N/A	3.727	PK
2			5350.000	65.092	61.318	-8.908	74.000	3.774	PK
3			5353.740	66.863	63.087	-7.137	74.000	3.776	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: AC1	Time: 2020/04/01 - 23:48
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

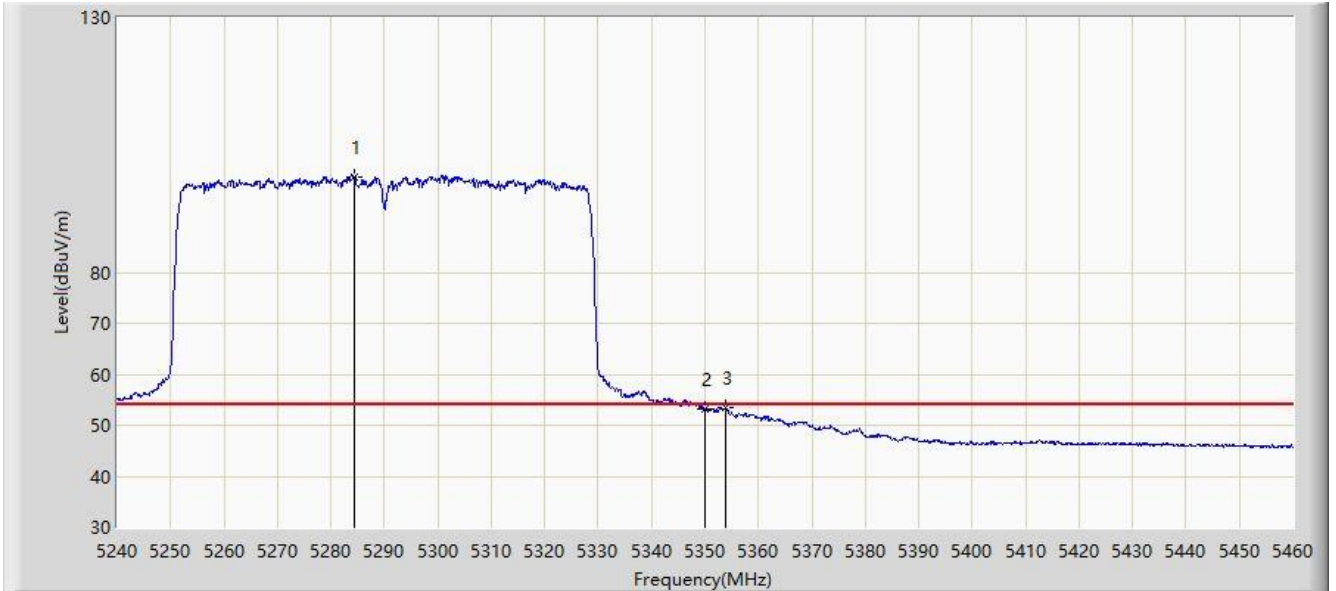

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5284.330	98.812	95.080	N/A	N/A	3.732	AV
2			5350.000	53.248	49.474	-0.752	54.000	3.774	AV
3			5353.960	53.339	49.563	-0.661	54.000	3.777	AV


Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)





Site: AC1	Time: 2020/04/01 - 23:52
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

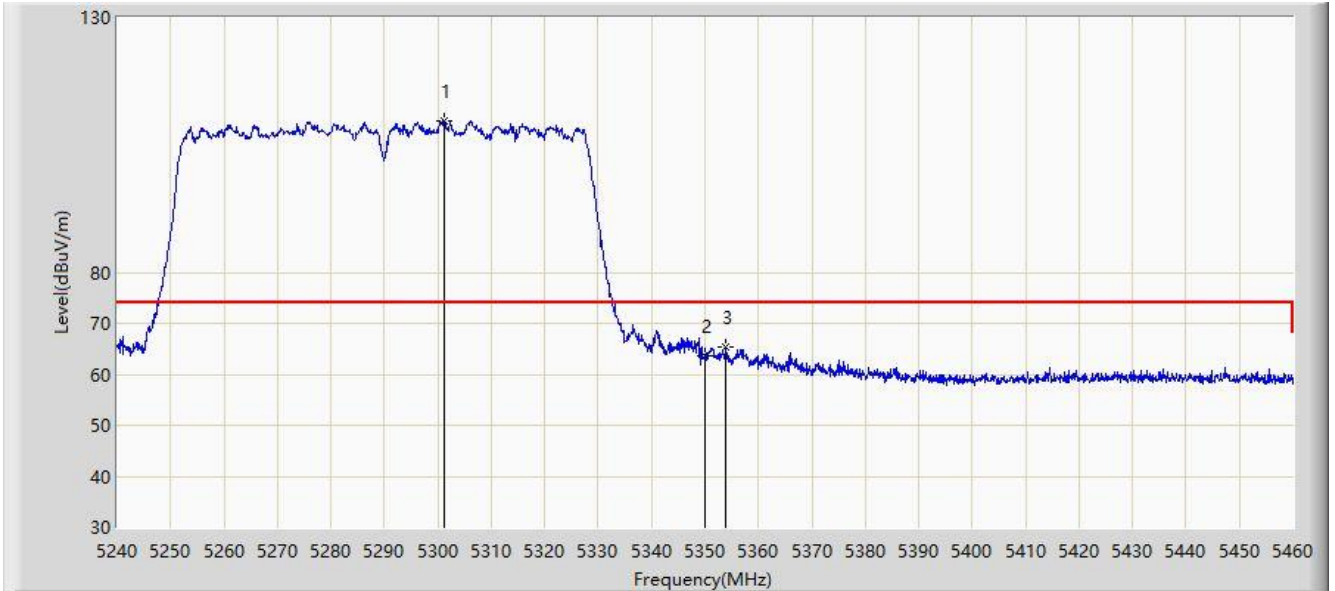


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5301.160	109.625	105.882	N/A	N/A	3.743	PK
2			5350.000	63.720	59.946	-10.280	74.000	3.774	PK
3			5353.850	65.319	61.543	-8.681	74.000	3.777	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/04/01 - 23:53
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

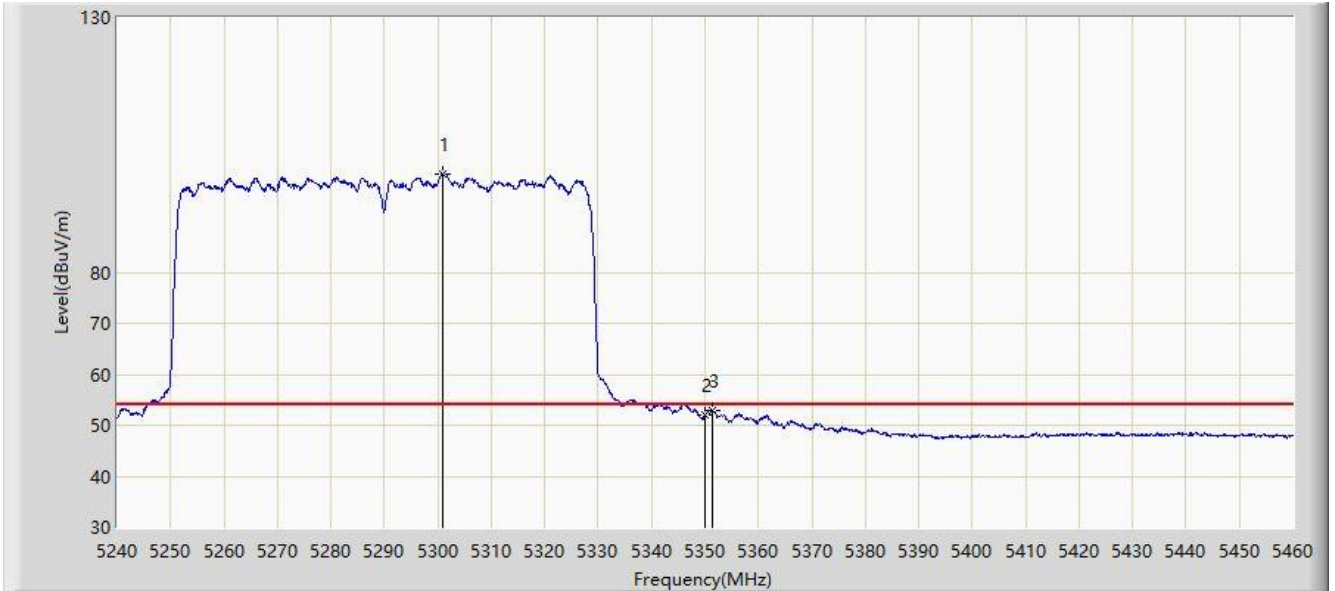


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5300.830	99.267	95.525	N/A	N/A	3.742	AV
2			5350.000	51.886	48.112	-2.114	54.000	3.774	AV
3			5351.430	52.954	49.179	-1.046	54.000	3.775	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 13:53
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

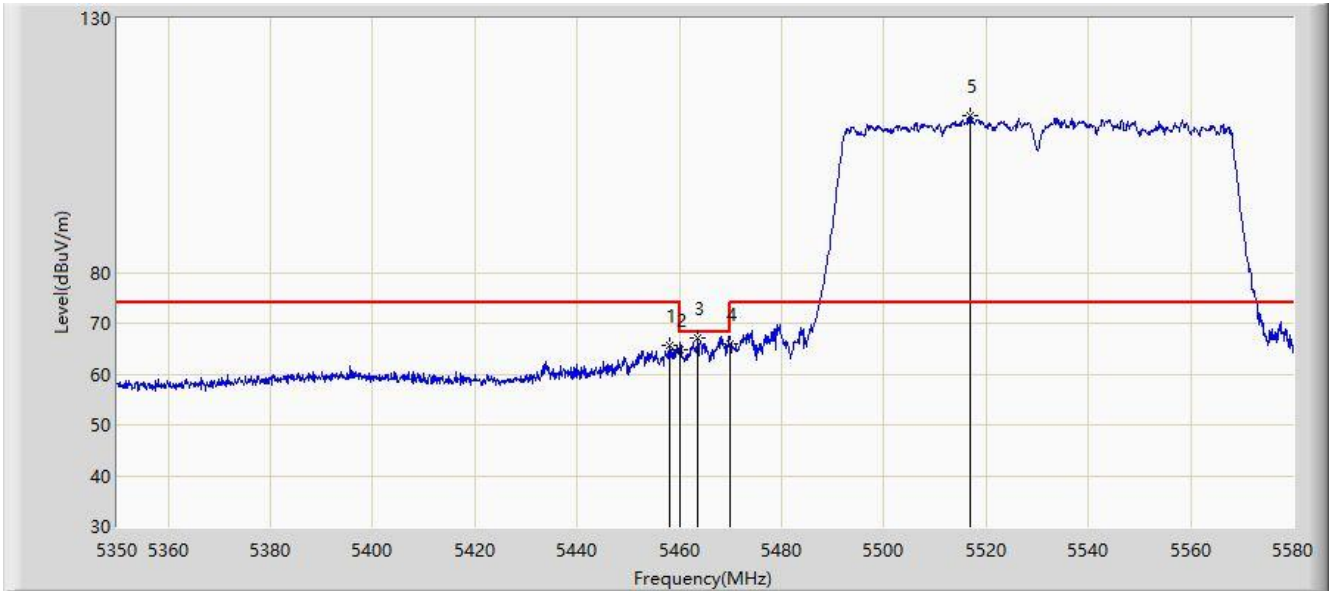


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.100	65.618	61.775	-8.382	74.000	3.843	PK
2			5460.000	64.718	60.874	-9.282	74.000	3.844	PK
3			5463.620	67.052	63.206	-1.148	68.200	3.846	PK
4			5470.000	65.821	61.970	-2.379	68.200	3.850	PK
5		*	5516.865	110.991	107.056	N/A	N/A	3.935	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 13:53
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

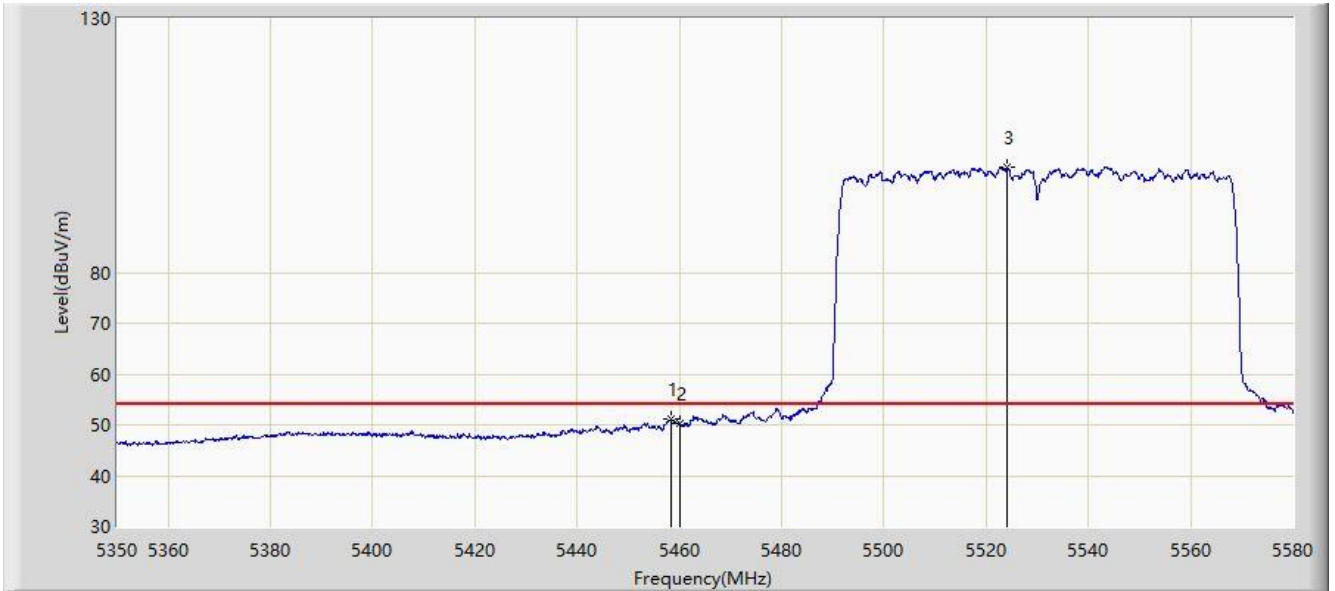


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.445	51.216	47.373	-2.784	54.000	3.843	AV
2			5460.000	50.225	46.381	-3.775	54.000	3.844	AV
3		*	5524.110	100.660	96.697	N/A	N/A	3.963	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 13:47
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

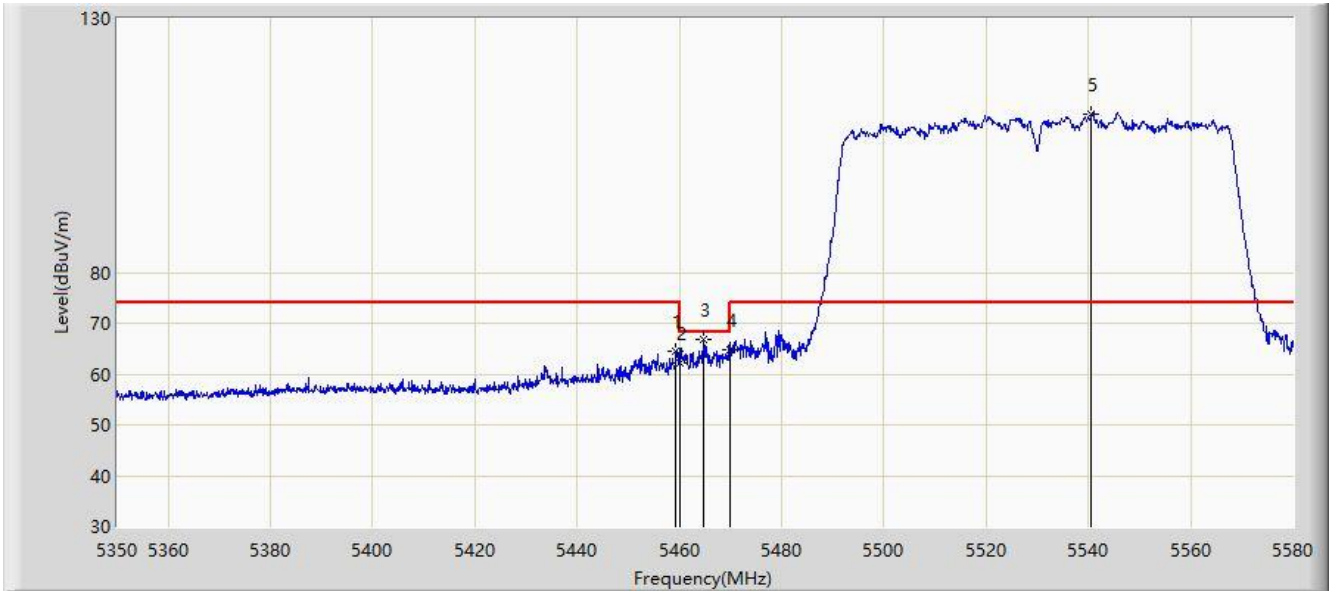


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.250	64.618	60.775	-9.382	74.000	3.843	PK
2			5460.000	62.229	58.385	-11.771	74.000	3.844	PK
3			5464.655	66.945	63.098	-1.255	68.200	3.847	PK
4			5470.000	64.792	60.941	-3.408	68.200	3.850	PK
5		*	5540.555	111.257	107.231	N/A	N/A	4.026	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 13:52
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

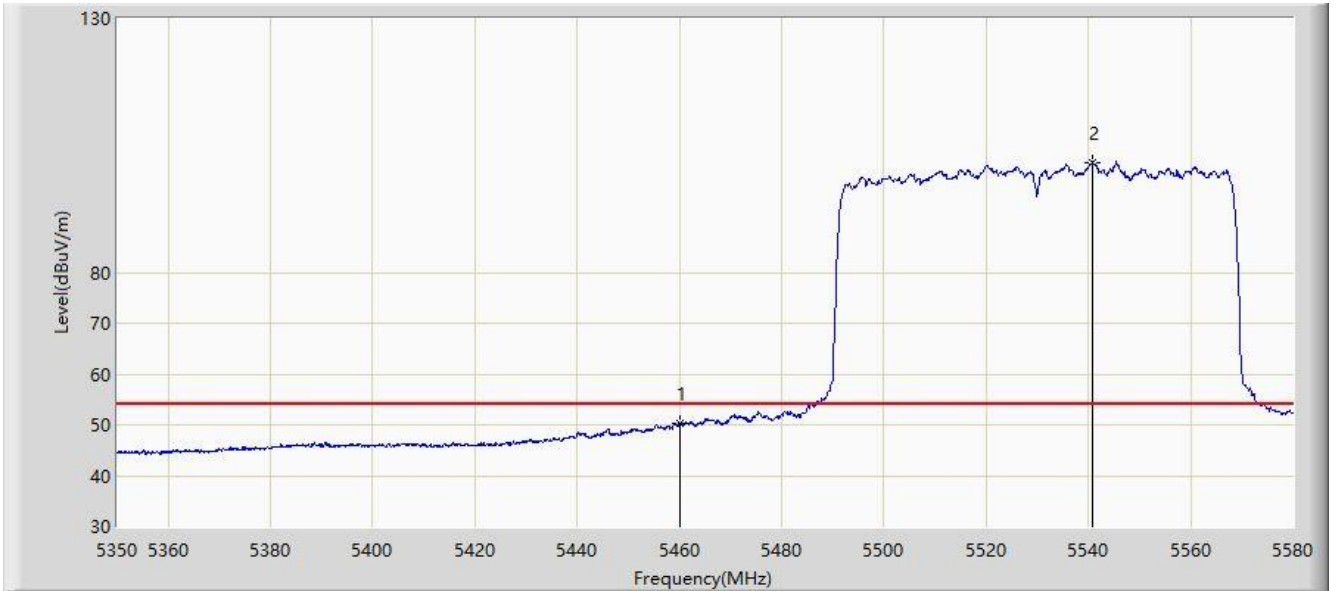


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.210	46.366	-3.790	54.000	3.844	AV
2		*	5540.785	101.657	97.630	N/A	N/A	4.026	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 13:57
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz	

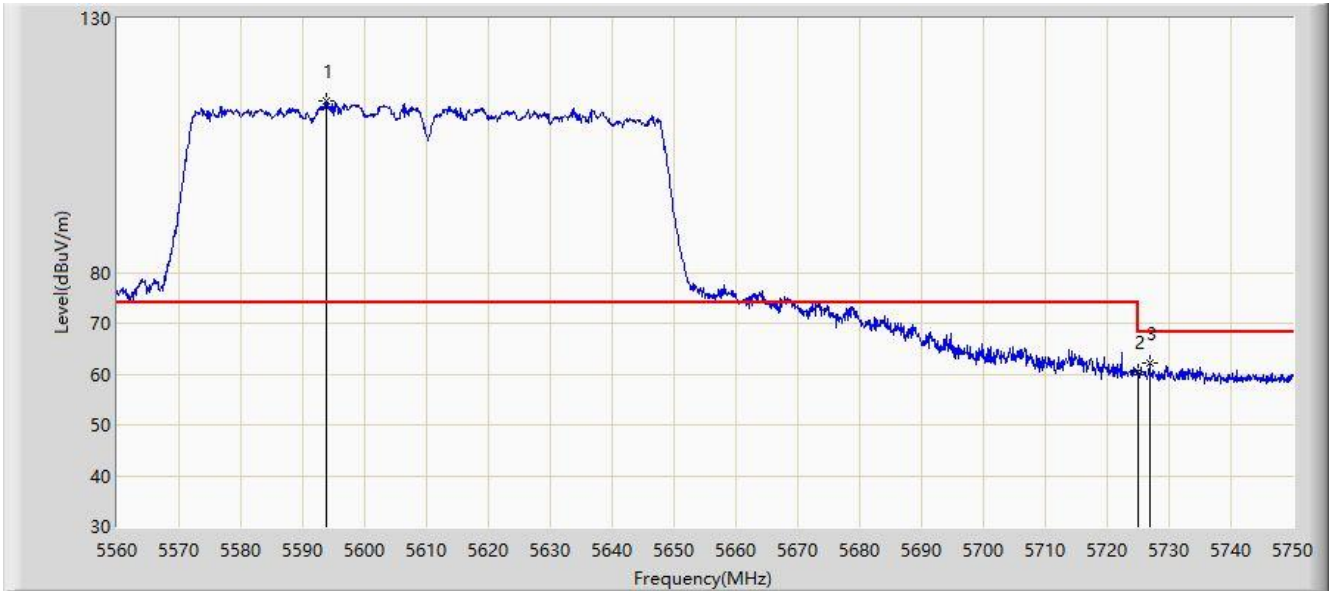


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5593.725	113.708	109.478	N/A	N/A	4.229	PK
2			5725.000	60.399	55.665	-7.801	68.200	4.734	PK
3			5726.820	62.278	57.537	-5.922	68.200	4.740	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 13:59
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz	

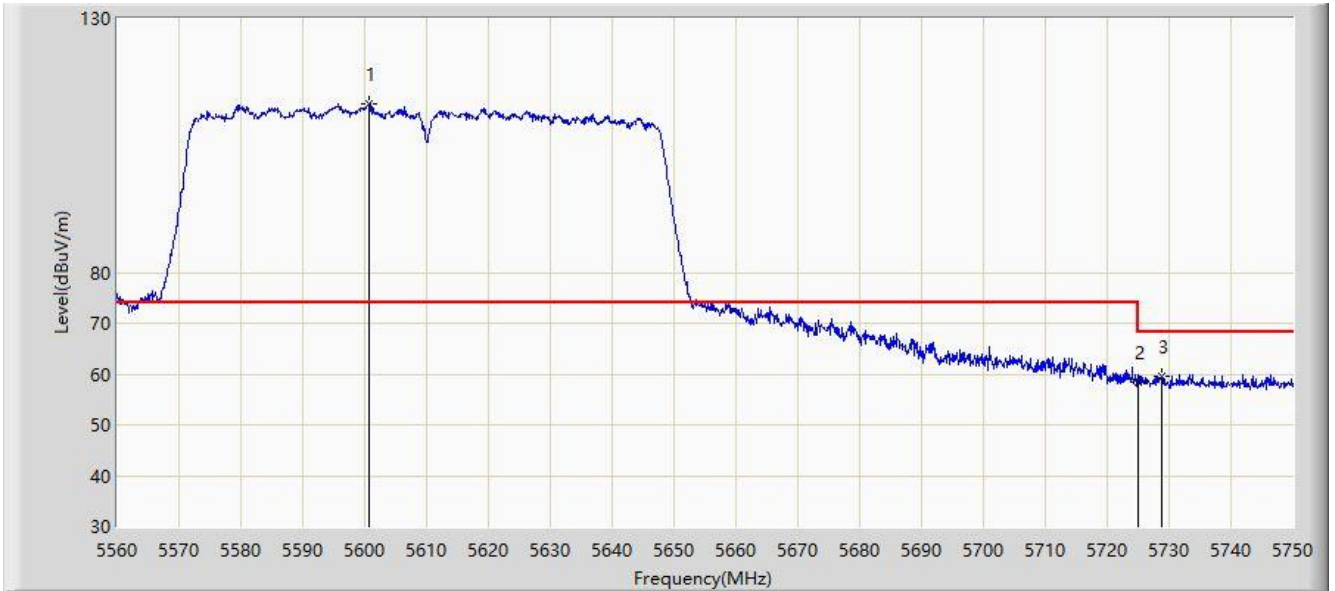

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5600.755	113.280	109.023	N/A	N/A	4.257	PK
2			5725.000	58.424	53.690	-9.776	68.200	4.734	PK
3			5728.815	59.660	54.912	-8.540	68.200	4.748	PK


Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)





Site: AC1	Time: 2020/02/24 - 15:33
Limit: FCC_Part 15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VH80 at Channel 5775MHz	

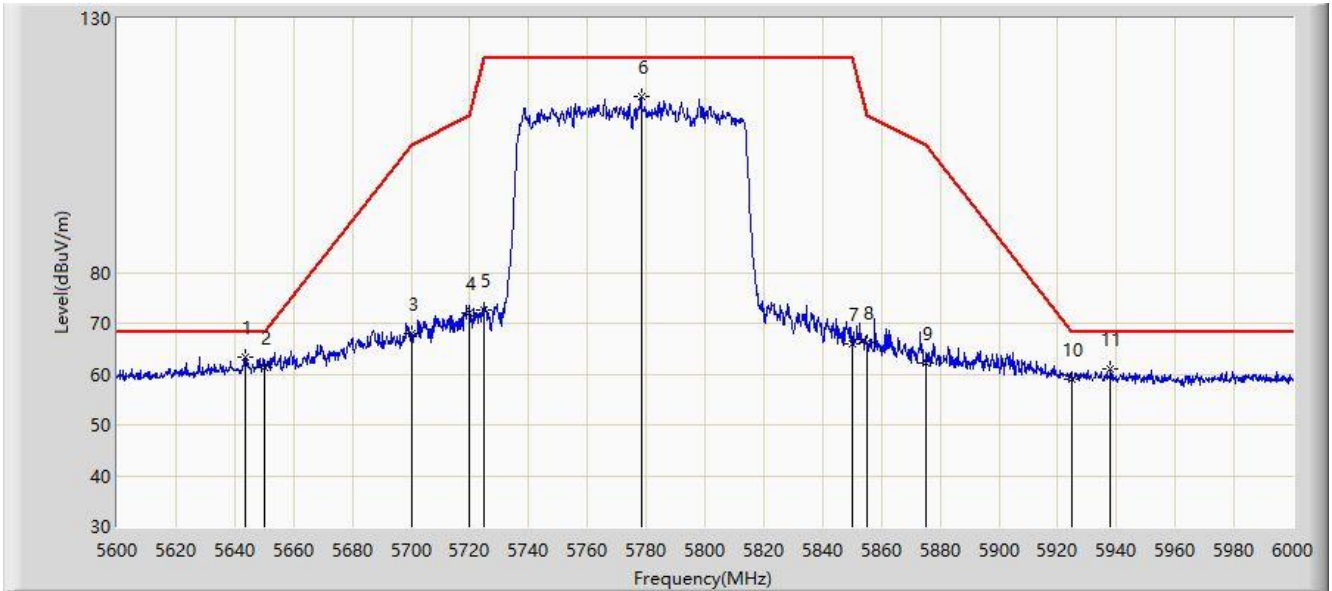


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5643.400	63.218	58.797	-4.982	68.200	4.421	PK
2			5650.000	61.414	56.968	-6.786	68.200	4.446	PK
3			5700.000	67.868	63.230	-37.332	105.200	4.638	PK
4			5720.000	71.961	67.246	-38.839	110.800	4.715	PK
5			5725.000	72.482	67.748	-49.718	122.200	4.734	PK
6			5778.200	114.645	109.706	N/A	N/A	4.938	PK
7			5850.000	65.847	60.633	-56.353	122.200	5.214	PK
8			5855.000	66.202	60.969	-44.598	110.800	5.233	PK
9			5875.000	62.170	56.860	-43.030	105.200	5.310	PK
10			5925.000	59.100	53.598	-9.100	68.200	5.502	PK
11			5938.000	61.047	55.495	-7.153	68.200	5.552	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/24 - 15:35
Limit: FCC_Part 15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VH80 at Channel 5775MHz	

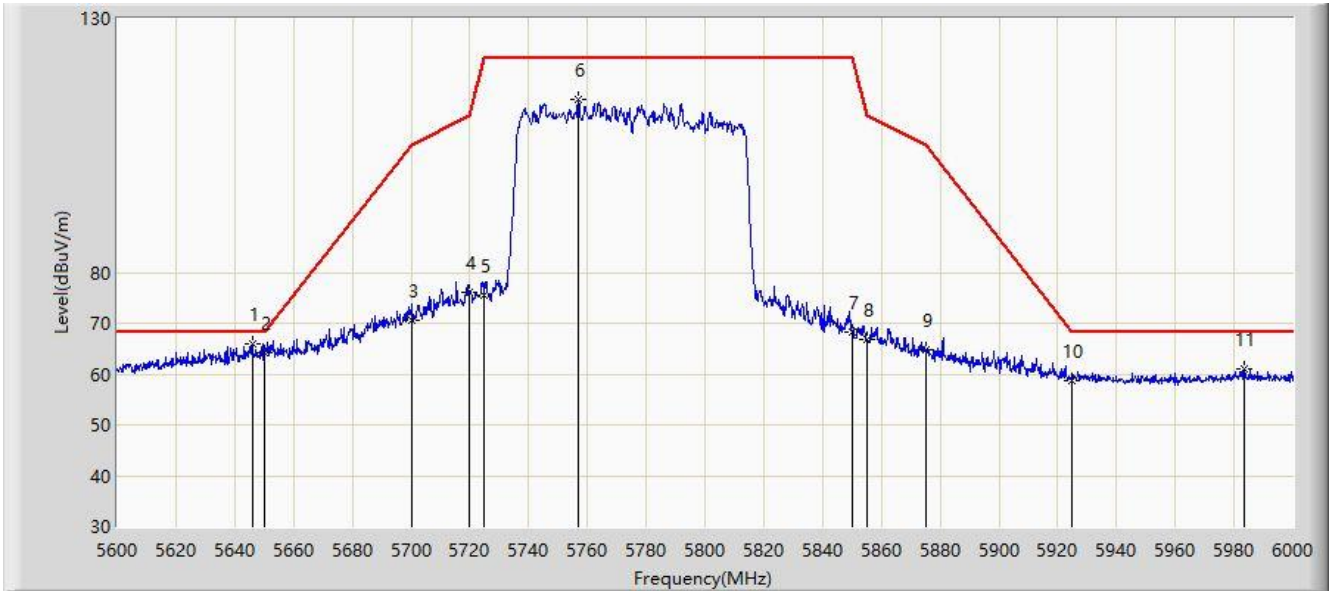


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5646.000	66.000	61.569	-2.200	68.200	4.431	PK
2			5650.000	64.234	59.788	-3.966	68.200	4.446	PK
3			5700.000	70.526	65.888	-34.674	105.200	4.638	PK
4			5720.000	76.219	71.504	-34.581	110.800	4.715	PK
5			5725.000	75.503	70.769	-46.697	122.200	4.734	PK
6			5757.000	114.050	109.194	N/A	N/A	4.856	PK
7			5850.000	68.351	63.137	-53.849	122.200	5.214	PK
8			5855.000	66.692	61.459	-44.108	110.800	5.233	PK
9			5875.000	64.681	59.371	-40.519	105.200	5.310	PK
10			5925.000	58.551	53.049	-9.649	68.200	5.502	PK
11			5983.400	60.988	55.262	-7.212	68.200	5.726	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 14:28
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT160 at Channel 5250MHz	

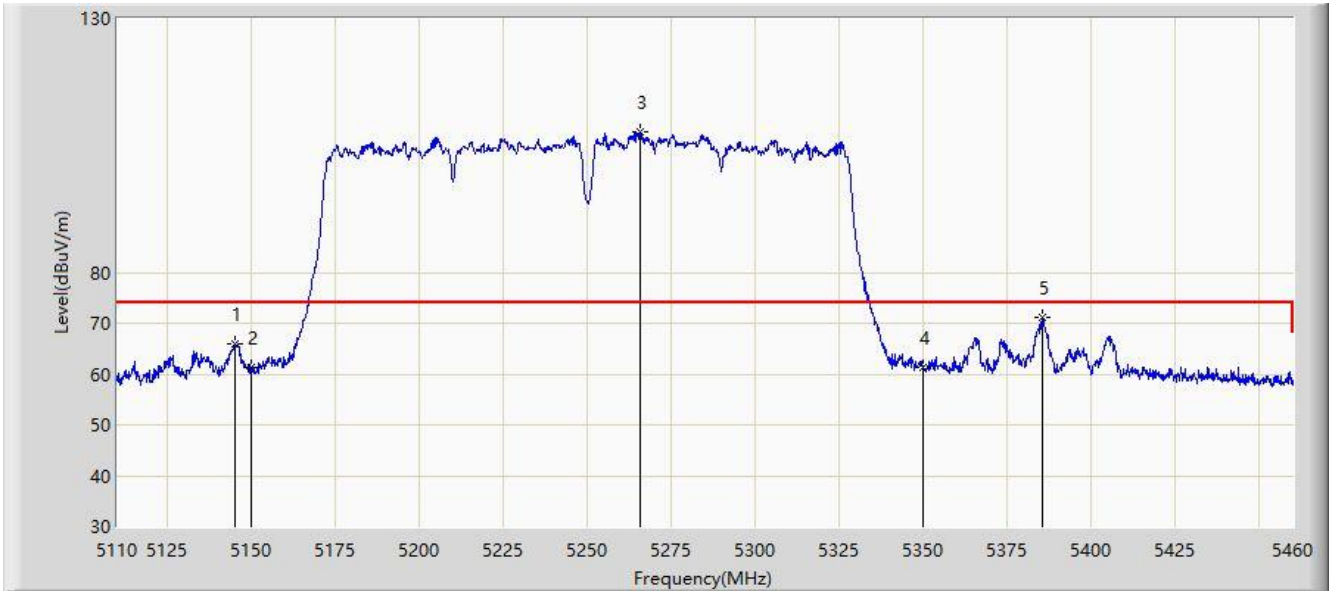


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.000	65.967	62.324	-8.033	74.000	3.642	PK
2			5150.000	61.340	57.694	-12.660	74.000	3.646	PK
3		*	5265.750	107.592	103.873	N/A	N/A	3.719	PK
4			5350.000	61.339	57.565	-12.661	74.000	3.774	PK
5			5385.450	71.088	67.291	-2.912	74.000	3.797	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 14:26
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT160 at Channel 5250MHz	

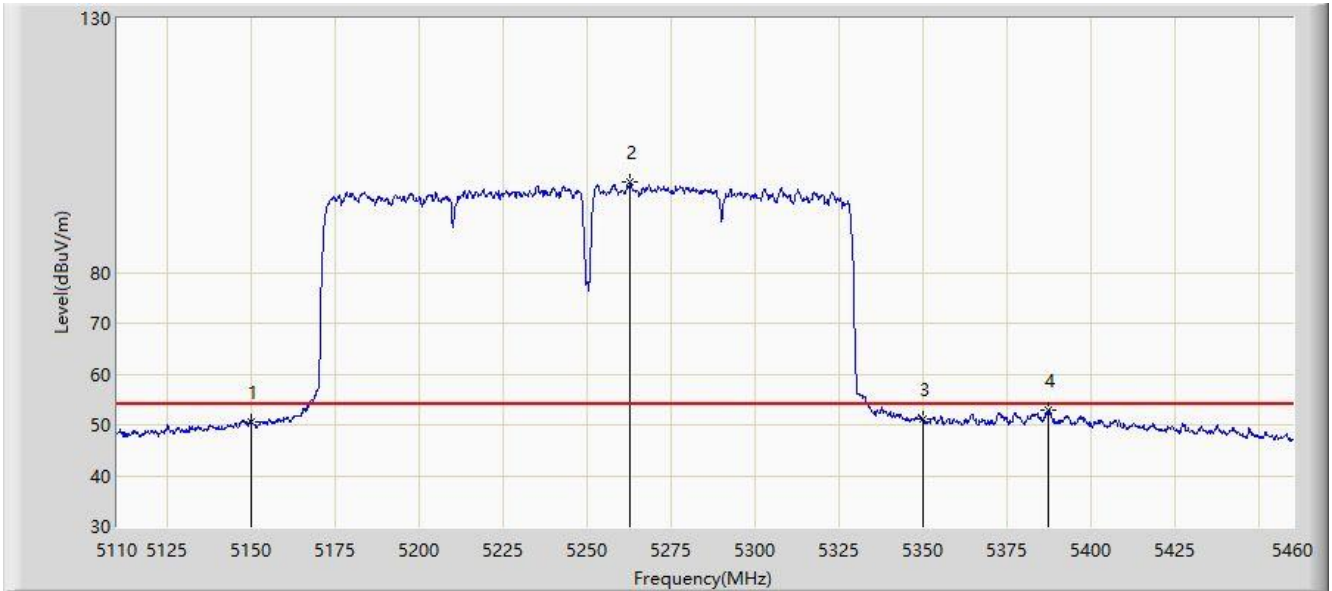

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.696	47.050	-3.304	54.000	3.646	AV
2		*	5262.600	97.687	93.969	N/A	N/A	3.717	AV
3			5350.000	51.097	47.323	-2.903	54.000	3.774	AV
4			5387.375	52.776	48.978	-1.224	54.000	3.798	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 14:30
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT160 at Channel 5250MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5144.300	67.008	63.365	-6.992	74.000	3.643	PK
2			5150.000	61.478	57.832	-12.522	74.000	3.646	PK
3		*	5204.325	106.079	102.398	N/A	N/A	3.681	PK
4			5350.000	60.339	56.565	-13.661	74.000	3.774	PK
5			5384.225	68.968	65.172	-5.032	74.000	3.796	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 14:32
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT160 at Channel 5250MHz	

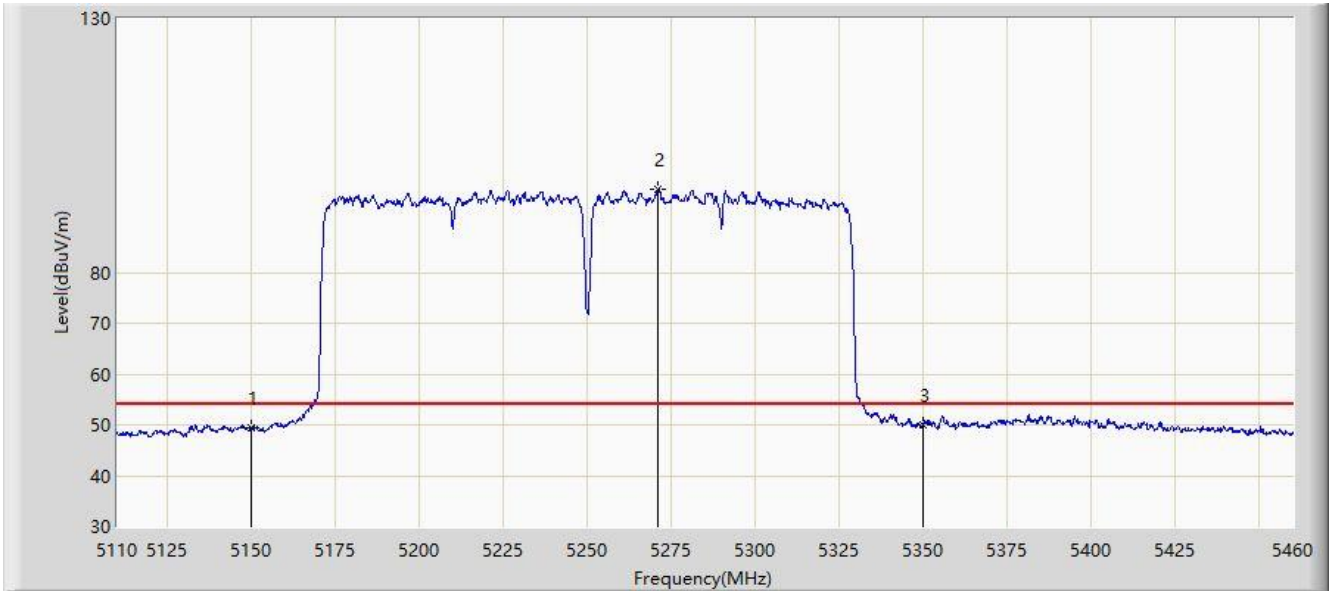


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.444	45.798	-4.556	54.000	3.646	AV
2		*	5271.000	96.451	92.728	N/A	N/A	3.722	AV
3			5350.000	50.124	46.350	-3.876	54.000	3.774	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/23 - 14:35
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT160 at Channel 5570MHz	

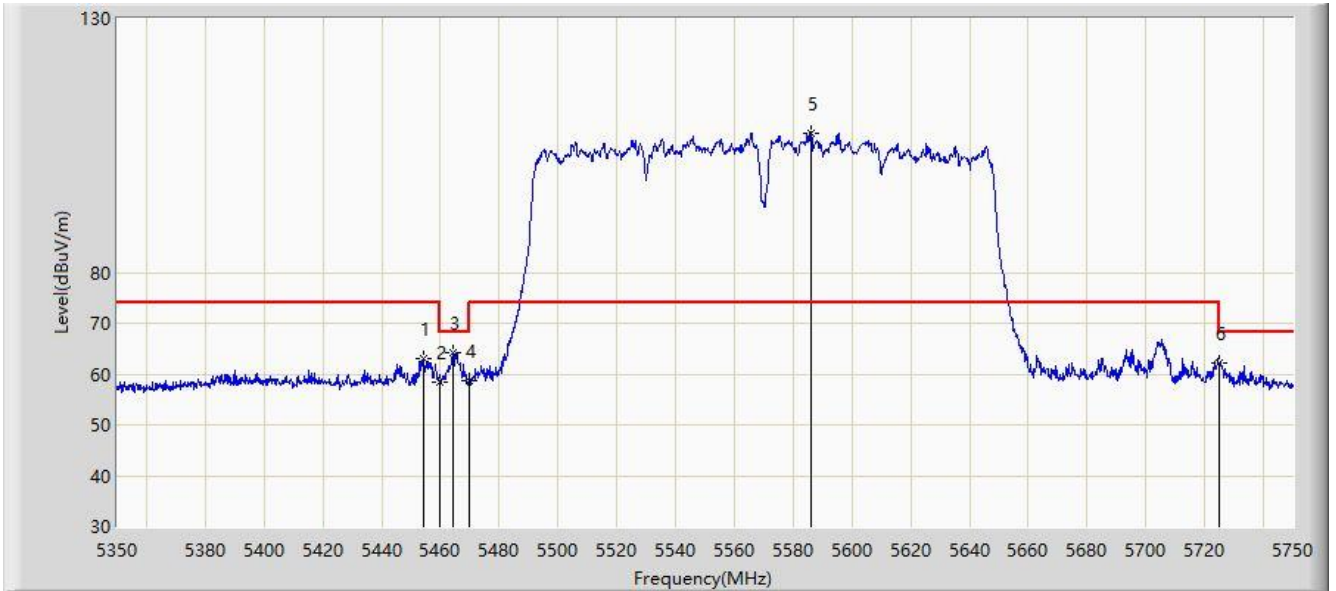


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.200	63.122	59.282	-10.878	74.000	3.840	PK
2			5460.000	58.487	54.643	-15.513	74.000	3.844	PK
3			5464.200	64.299	60.452	-3.901	68.200	3.847	PK
4			5470.000	58.648	54.797	-9.552	68.200	3.850	PK
5		*	5586.200	107.515	103.314	N/A	N/A	4.201	PK
6			5725.000	62.204	57.470	-5.996	68.200	4.734	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 14:44
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT160 at Channel 5570MHz	

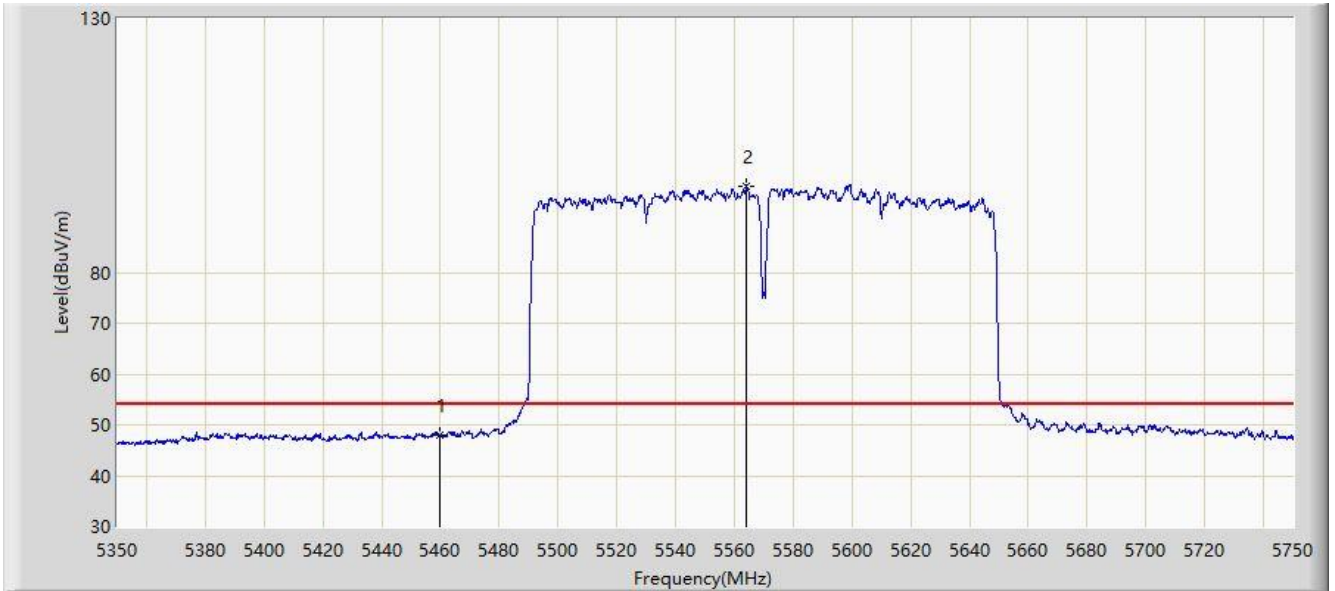

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.874	44.030	-6.126	54.000	3.844	AV
2		*	5564.000	96.945	92.829	N/A	N/A	4.116	AV


Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)





Site: AC1	Time: 2020/02/23 - 14:48
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT160 at Channel 5570MHz	

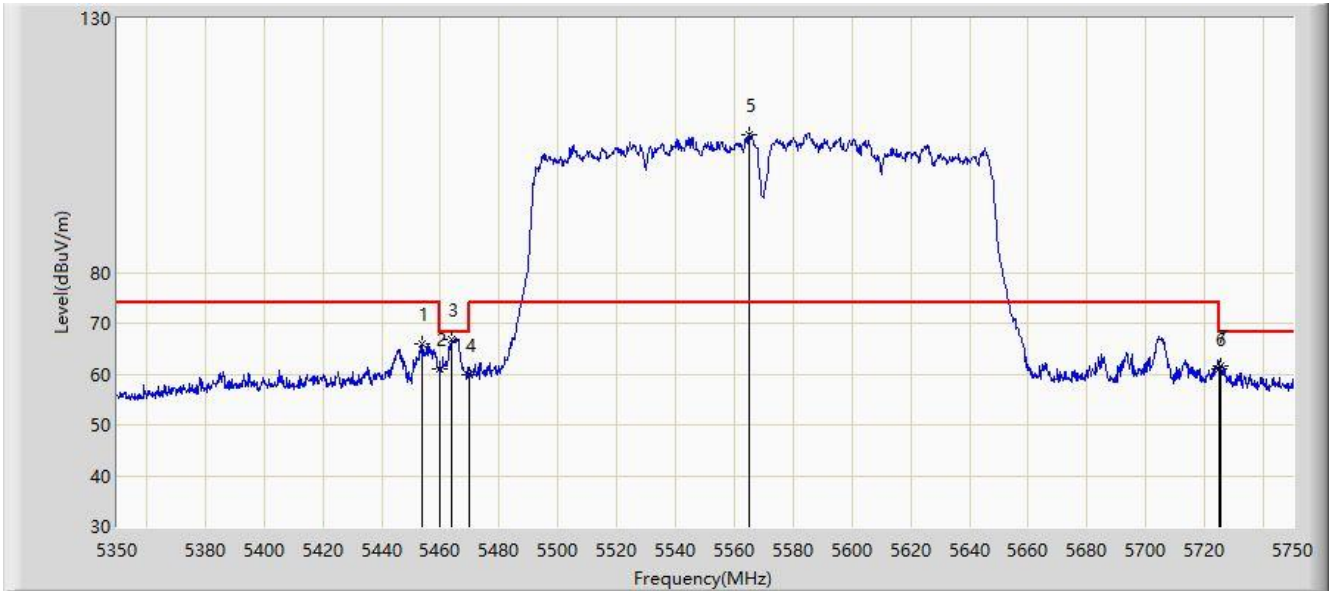


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.600	66.043	62.203	-7.957	74.000	3.840	PK
2			5460.000	61.140	57.296	-12.860	74.000	3.844	PK
3			5463.600	66.901	63.055	-1.299	68.200	3.846	PK
4			5470.000	59.963	56.112	-8.237	68.200	3.850	PK
5		*	5565.000	107.200	103.081	N/A	N/A	4.119	PK
6			5725.000	60.969	56.235	-7.231	68.200	4.734	PK
7			5725.200	61.716	56.981	-6.484	68.200	4.735	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 14:48
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ac-VHT160 at Channel 5570MHz	

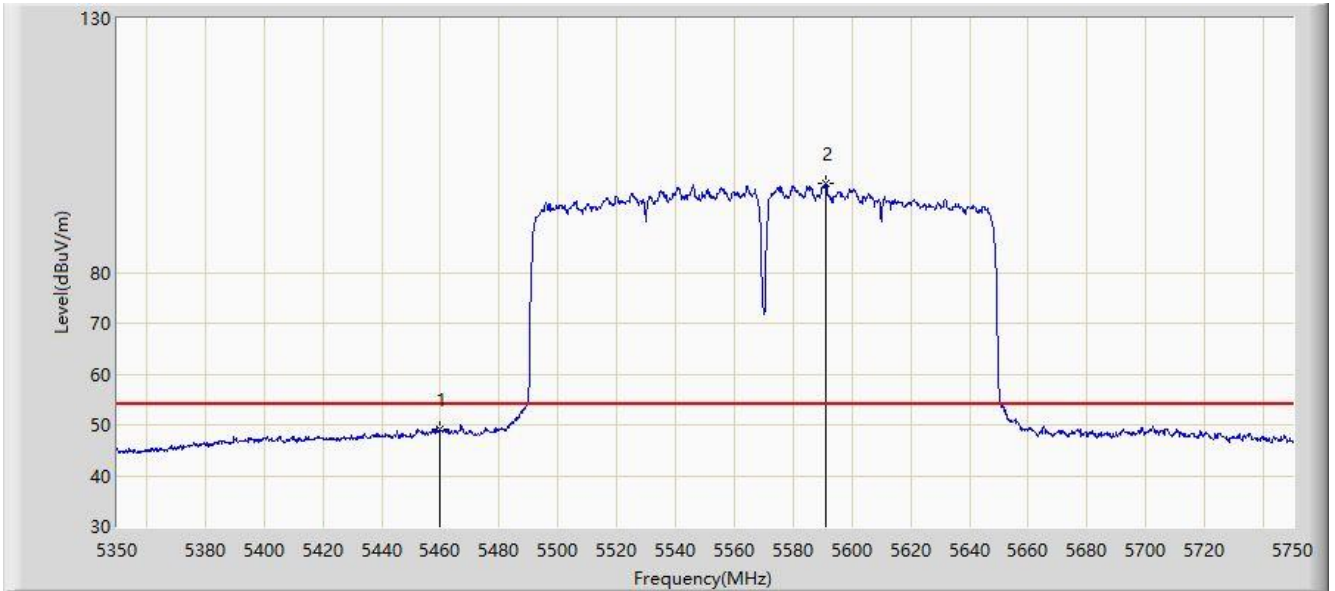


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	49.038	45.194	-4.962	54.000	3.844	AV
2		*	5591.200	97.468	93.248	N/A	N/A	4.219	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/04/02 - 00:41
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz	

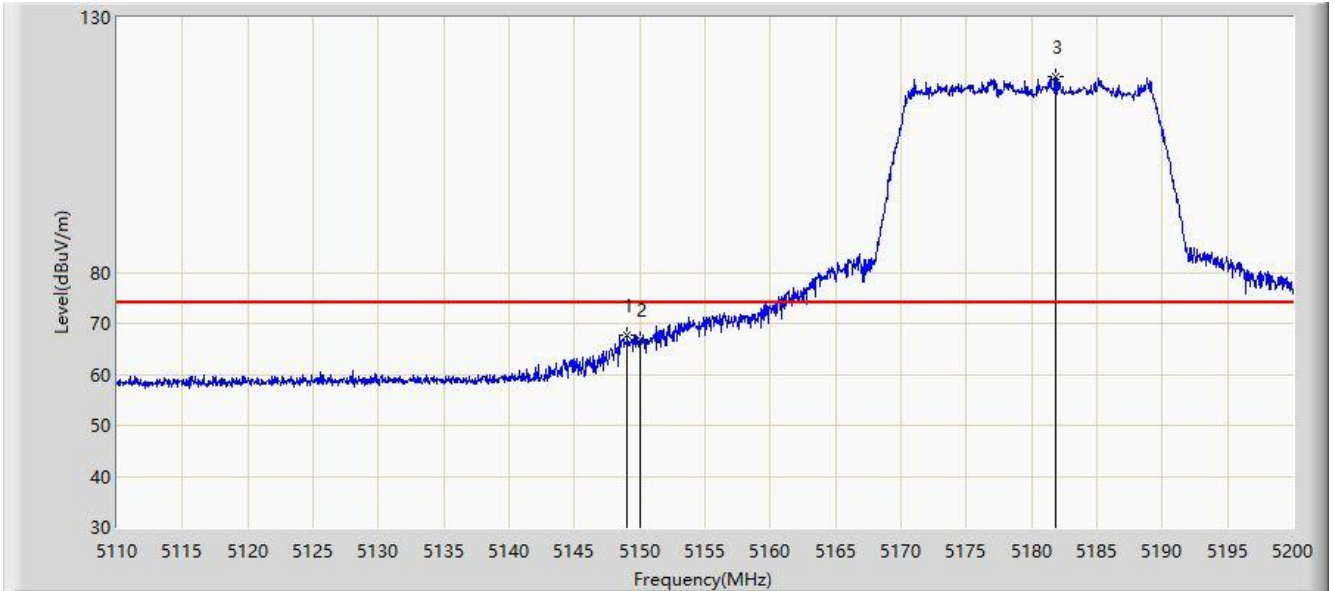


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.060	67.813	64.167	-6.187	74.000	3.646	PK
2			5150.000	66.882	63.236	-7.118	74.000	3.646	PK
3		*	5181.865	118.372	114.706	N/A	N/A	3.666	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/04/02 - 00:42
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz	

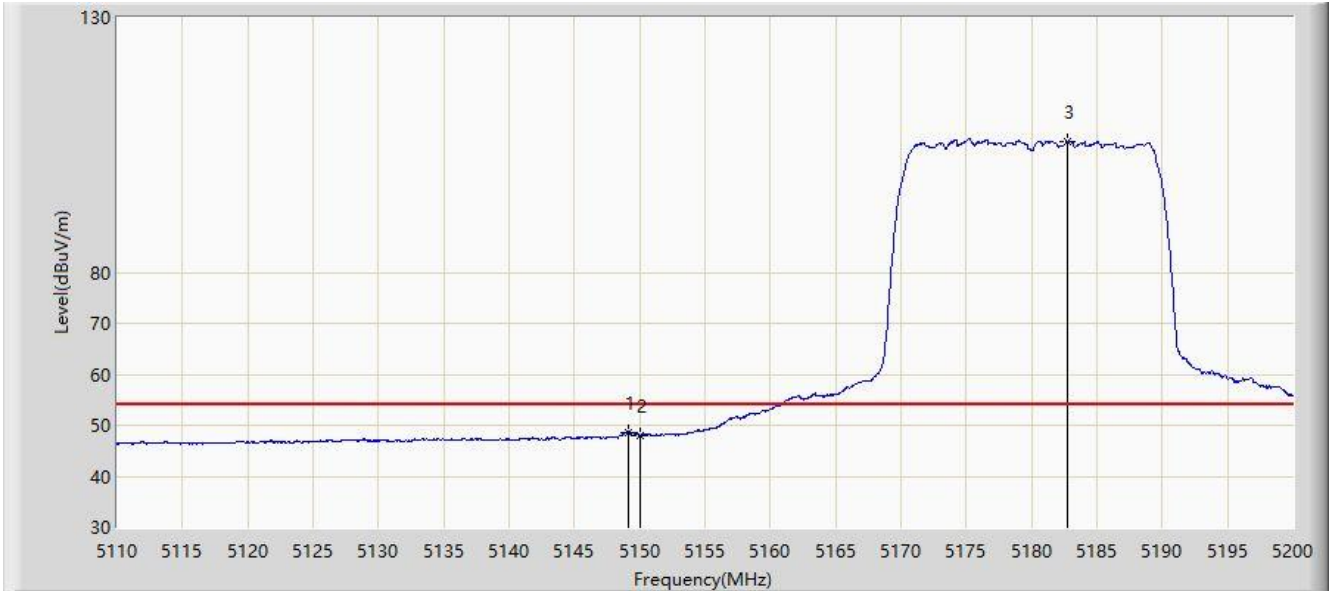


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.150	48.679	45.033	-5.321	54.000	3.646	AV
2			5150.000	48.059	44.413	-5.941	54.000	3.646	AV
3		*	5182.720	105.636	101.969	N/A	N/A	3.666	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/04/02 - 00:46
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz	

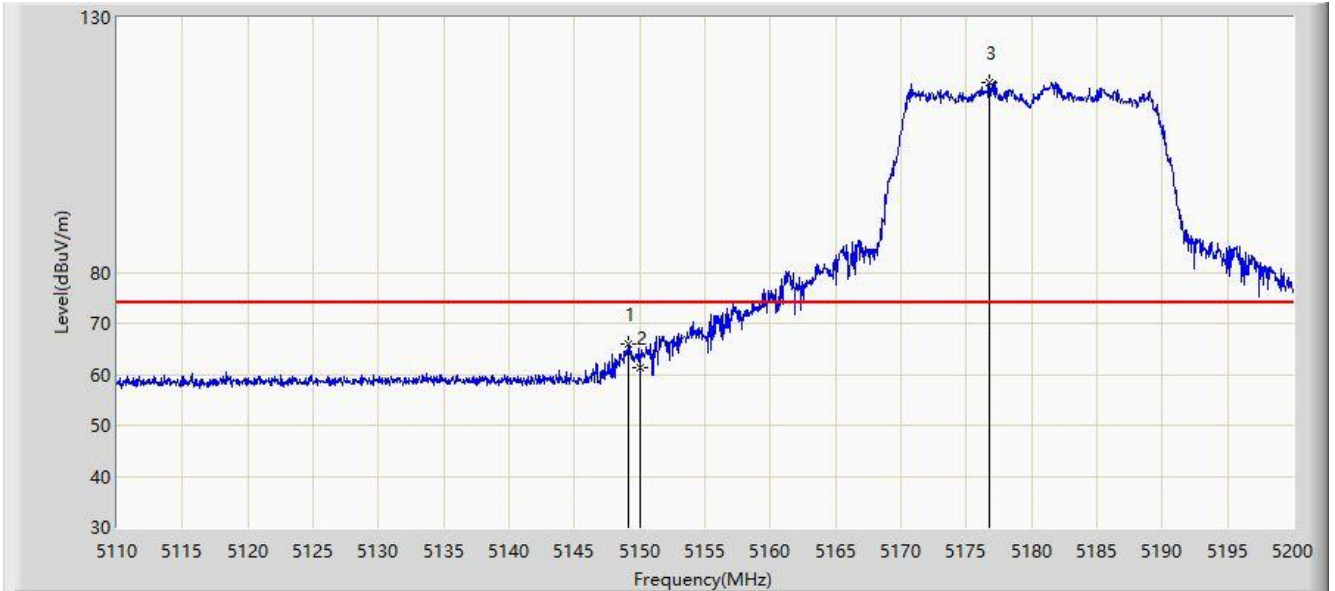


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.150	65.950	62.304	-8.050	74.000	3.646	PK
2			5150.000	61.306	57.660	-12.694	74.000	3.646	PK
3		*	5176.735	117.133	113.470	N/A	N/A	3.663	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/04/02 - 00:44
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz	

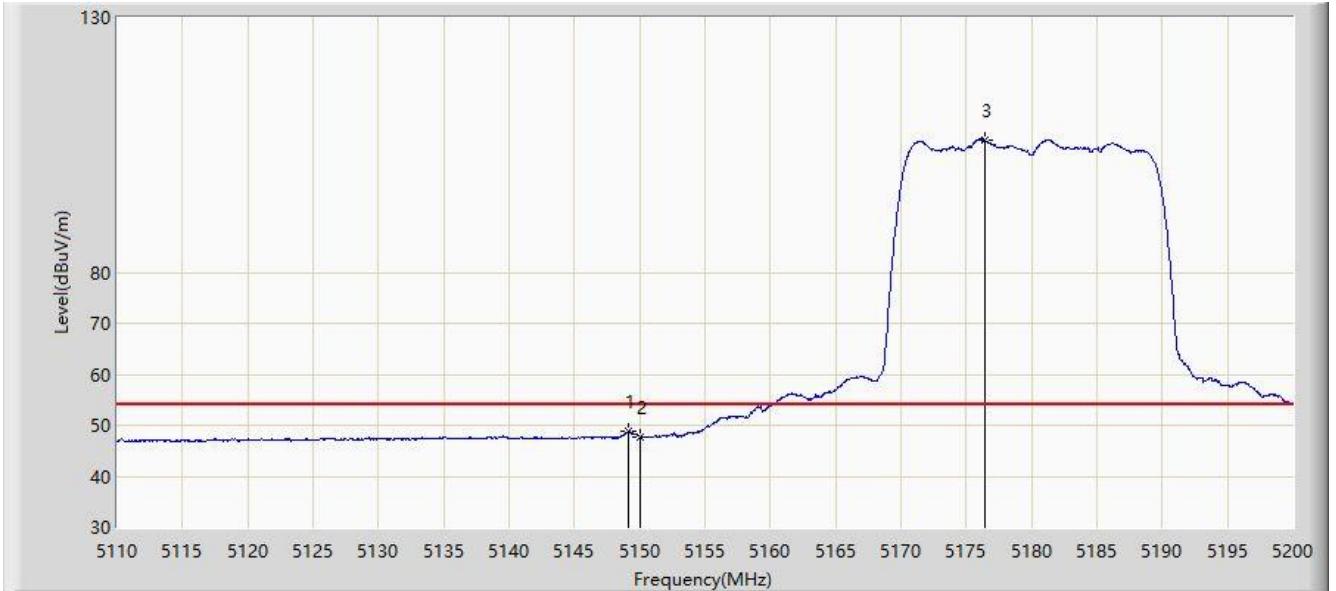


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.150	48.740	45.094	-5.260	54.000	3.646	AV
2			5150.000	47.775	44.129	-6.225	54.000	3.646	AV
3		*	5176.420	105.935	102.272	N/A	N/A	3.663	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 14:52
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz	

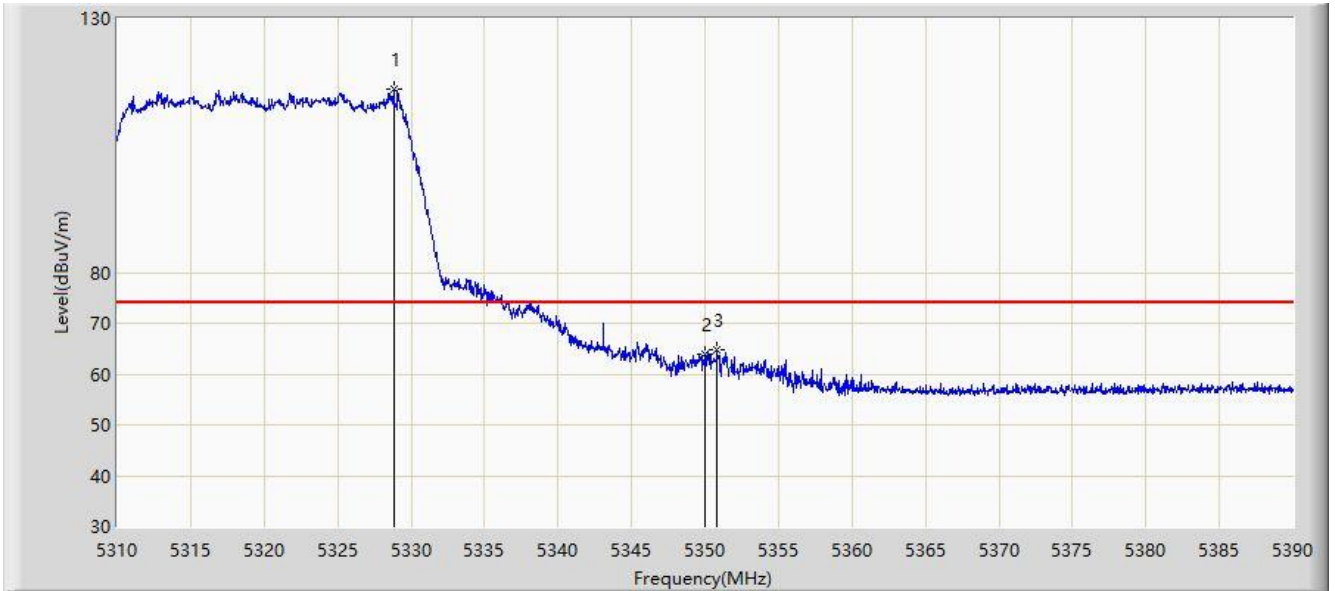


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5328.800	115.961	112.200	N/A	N/A	3.761	PK
2			5350.000	63.820	60.046	-10.180	74.000	3.774	PK
3			5350.800	64.830	61.056	-9.170	74.000	3.774	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/23 - 14:54
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz	

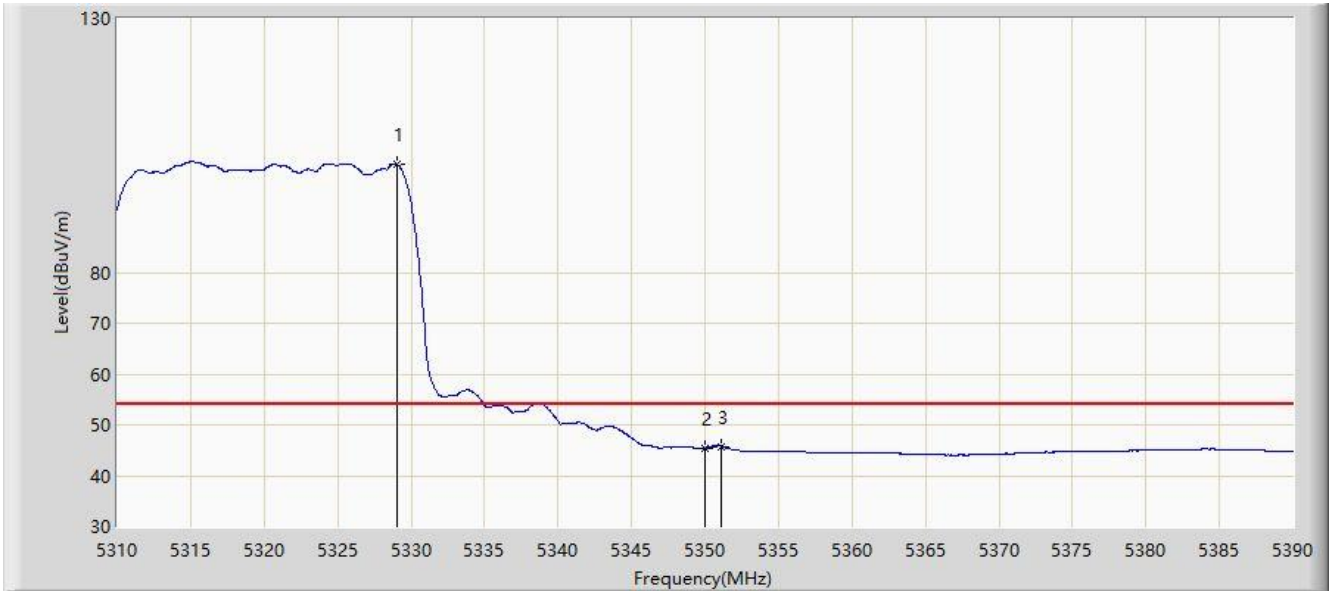

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5329.000	101.331	97.570	N/A	N/A	3.761	AV
2			5350.000	45.236	41.462	-8.764	54.000	3.774	AV
3			5351.120	45.796	42.022	-8.204	54.000	3.774	AV


Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)





Site: AC1	Time: 2020/02/23 - 14:57
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz	

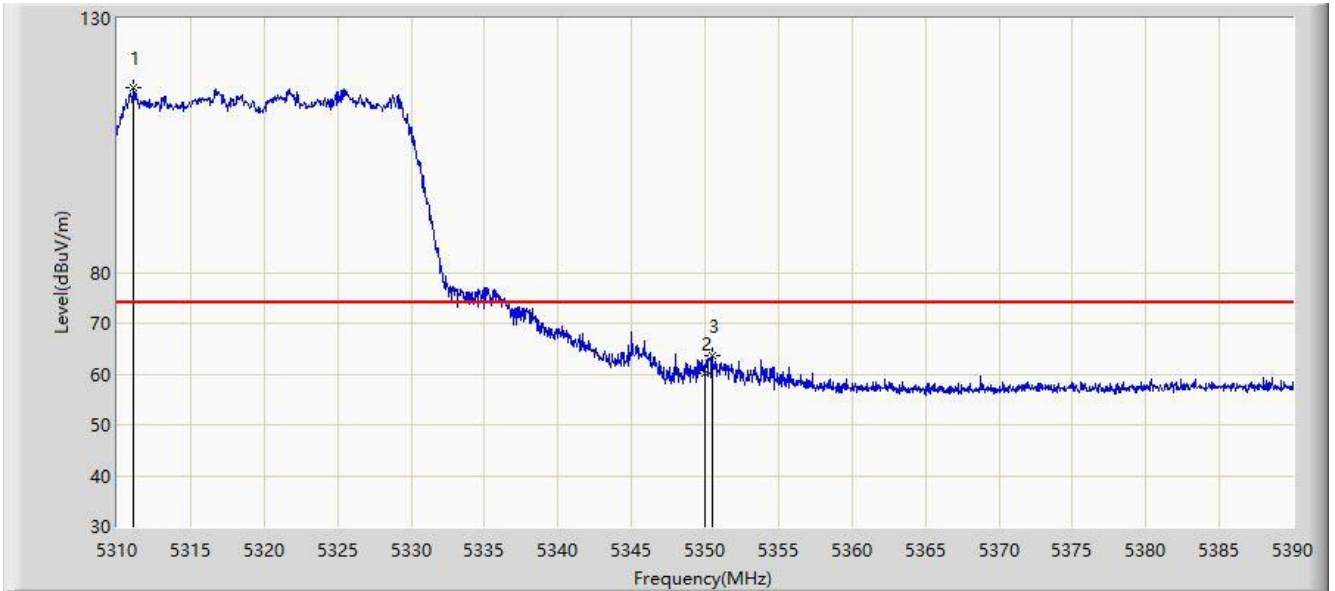


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5311.120	116.275	112.526	N/A	N/A	3.749	PK
2			5350.000	60.201	56.427	-13.799	74.000	3.774	PK
3			5350.480	63.722	59.948	-10.278	74.000	3.774	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 14:57
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz	

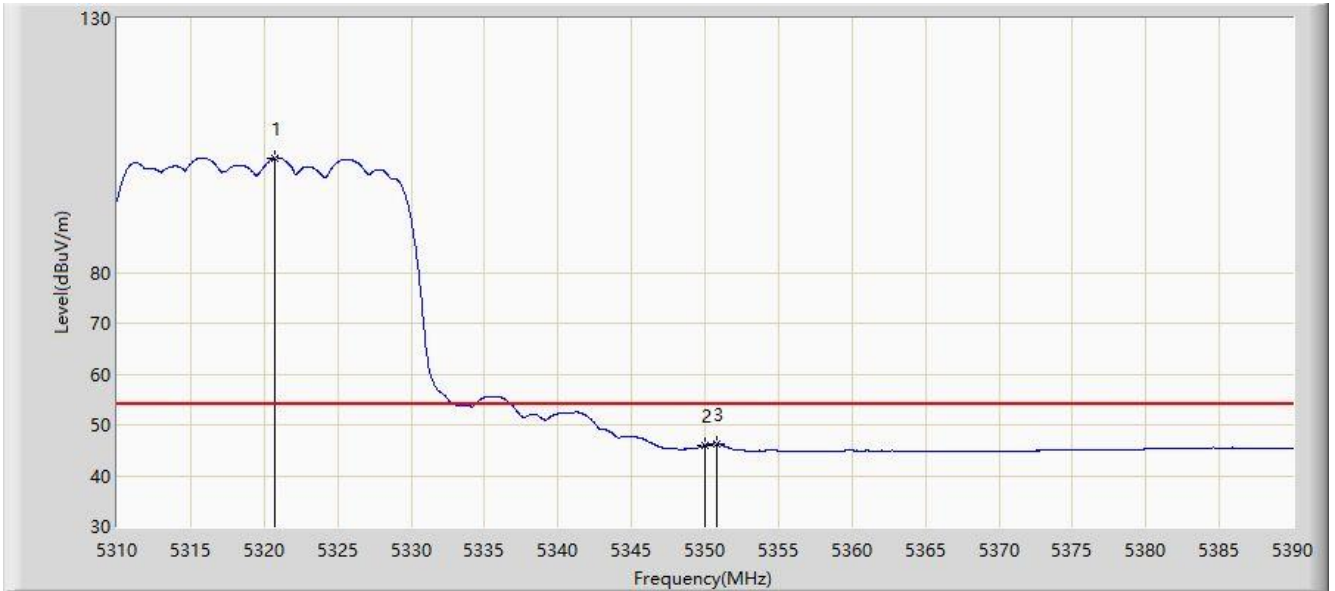


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5320.680	102.542	98.786	N/A	N/A	3.756	AV
2			5350.000	45.902	42.128	-8.098	54.000	3.774	AV
3			5350.760	46.338	42.564	-7.662	54.000	3.774	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Site: AC1	Time: 2020/02/23 - 15:00
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz	

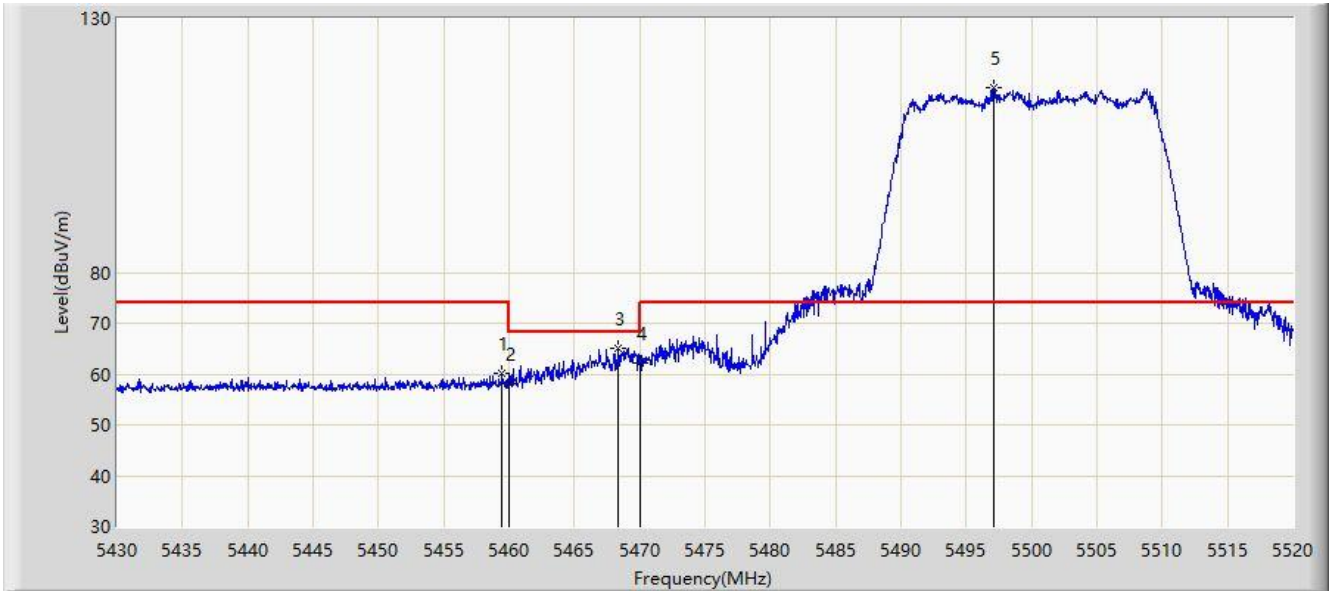


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.475	60.117	56.273	-13.883	74.000	3.844	PK
2			5460.000	58.246	54.402	-15.754	74.000	3.844	PK
3			5468.385	65.017	61.168	-3.183	68.200	3.849	PK
4			5470.000	62.158	58.307	-6.042	68.200	3.850	PK
5		*	5497.140	116.277	112.400	N/A	N/A	3.877	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 15:02
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz	

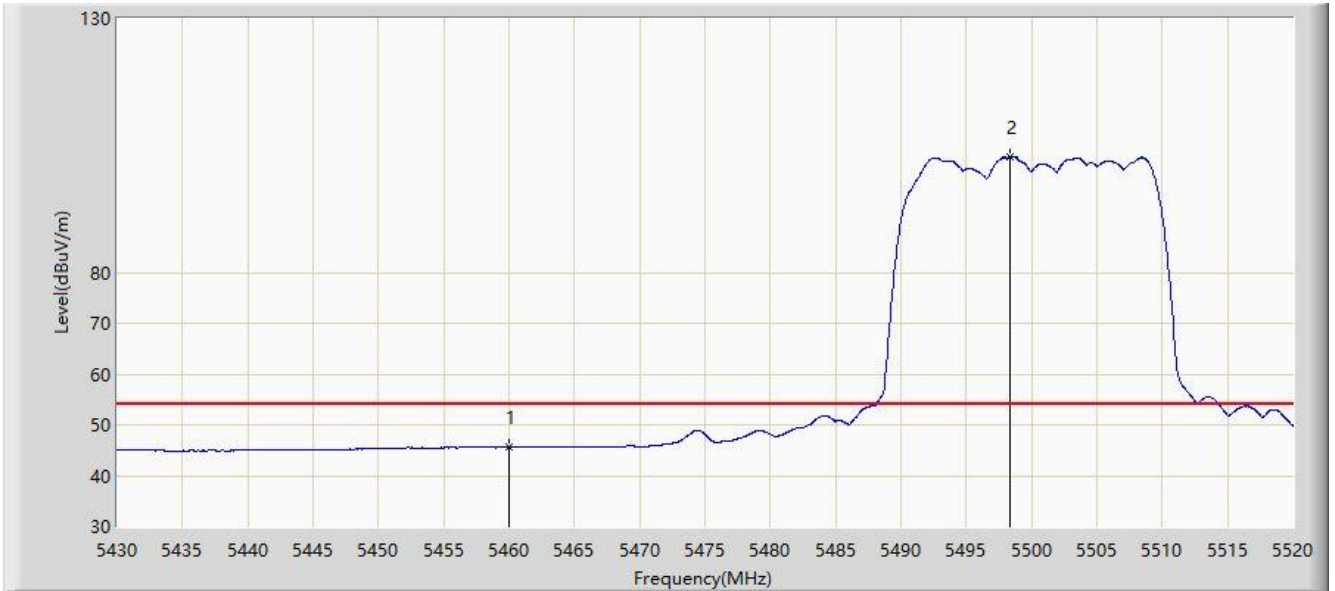


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.596	41.752	-8.404	54.000	3.844	AV
2		*	5498.400	102.845	98.966	N/A	N/A	3.879	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 15:04
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz	

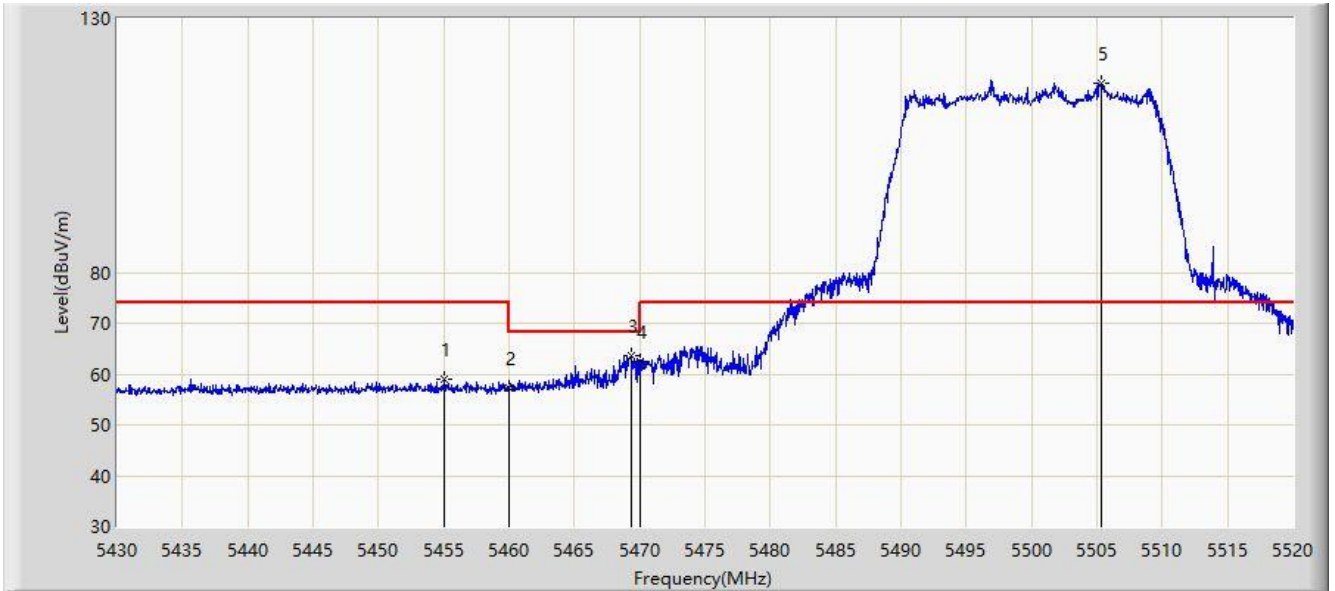


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.065	58.890	55.049	-15.110	74.000	3.841	PK
2			5460.000	57.282	53.438	-16.718	74.000	3.844	PK
3			5469.330	63.760	59.910	-4.440	68.200	3.850	PK
4			5470.000	62.428	58.577	-5.772	68.200	3.850	PK
5		*	5505.330	117.115	113.224	N/A	N/A	3.891	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 15:04
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz	

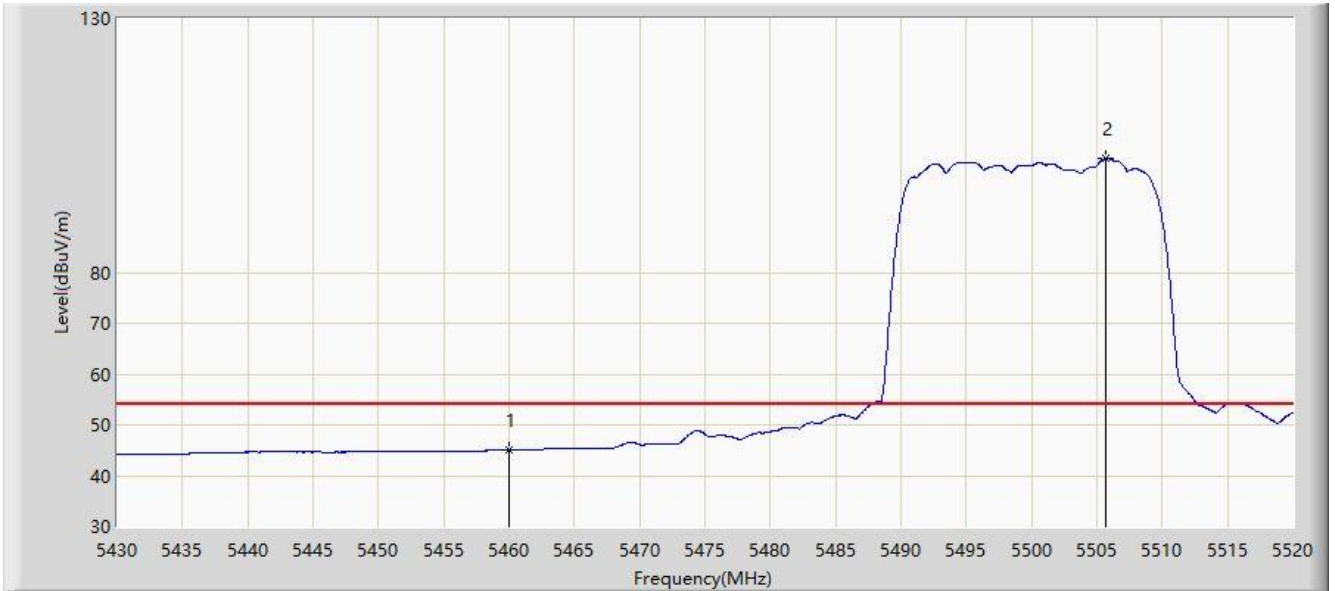


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.042	41.198	-8.958	54.000	3.844	AV
2		*	5505.690	102.457	98.565	N/A	N/A	3.892	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 15:07
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5700MHz	

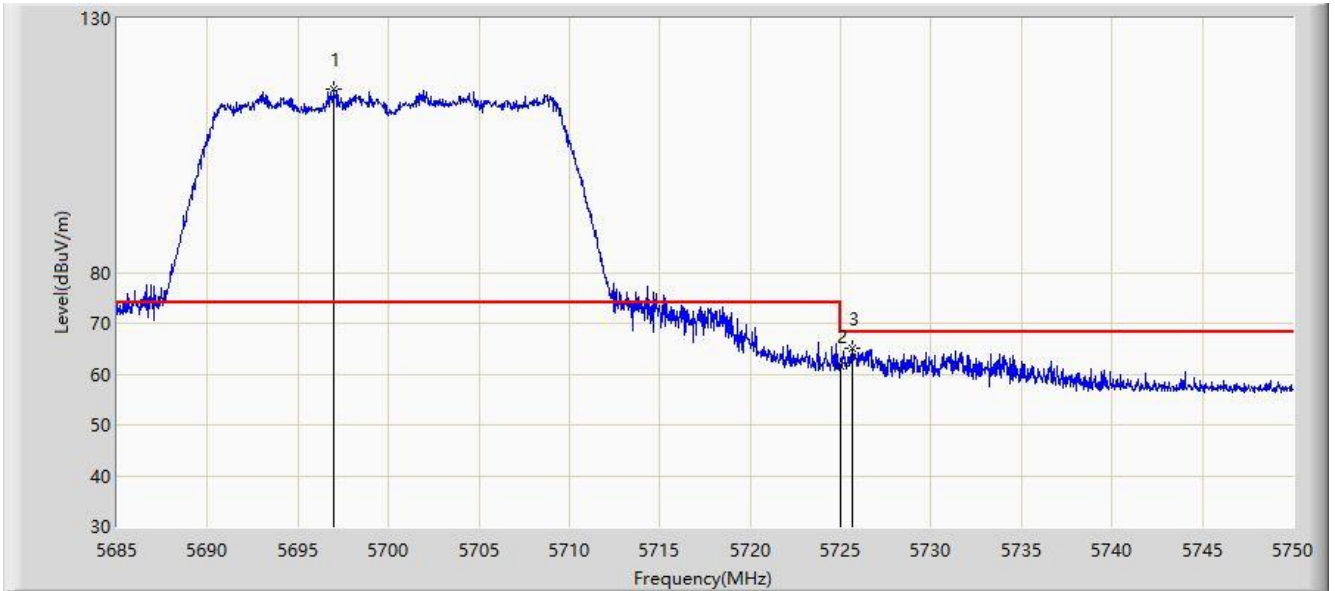


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5696.960	116.051	111.425	N/A	N/A	4.626	PK
2			5725.000	61.459	56.725	-6.741	68.200	4.734	PK
3			5725.625	65.005	60.269	-3.195	68.200	4.736	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: AC1	Time: 2020/02/23 - 15:09
Limit: FCC_Part 15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE20 at Channel 5700MHz	

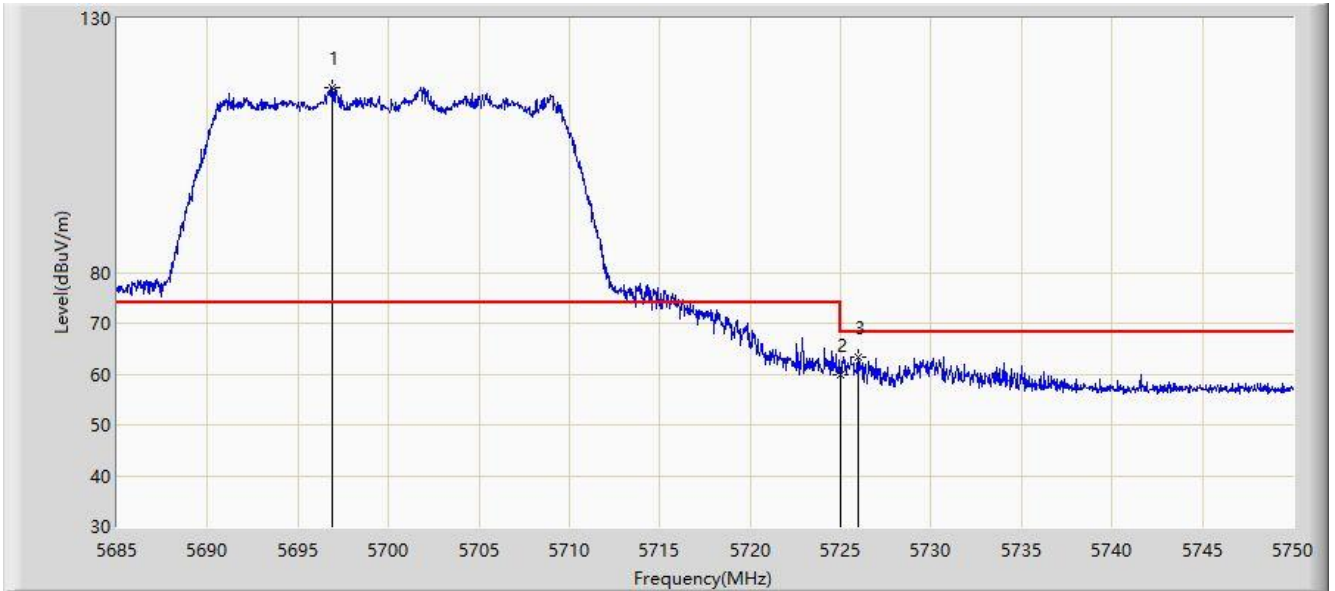

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5696.928	116.514	111.888	N/A	N/A	4.626	PK
2			5725.000	59.805	55.071	-8.395	68.200	4.734	PK
3			5725.950	63.428	58.691	-4.772	68.200	4.738	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)