


EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2447MHz	Test Voltage	By PoE

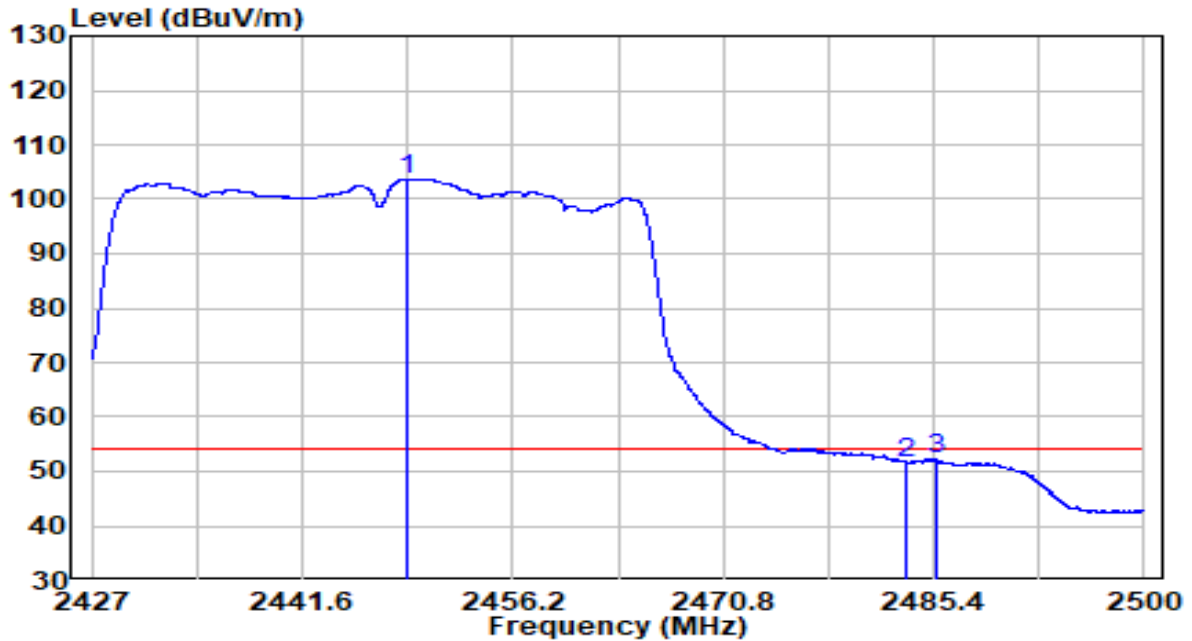


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2448.900	71.29	32.47	103.75	N/A	N/A	Average
2	2483.500	18.98	32.61	51.59	-2.41	54.00	Average
3	2485.510	19.75	32.62	52.37	-1.63	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2447MHz	Test Voltage	By PoE

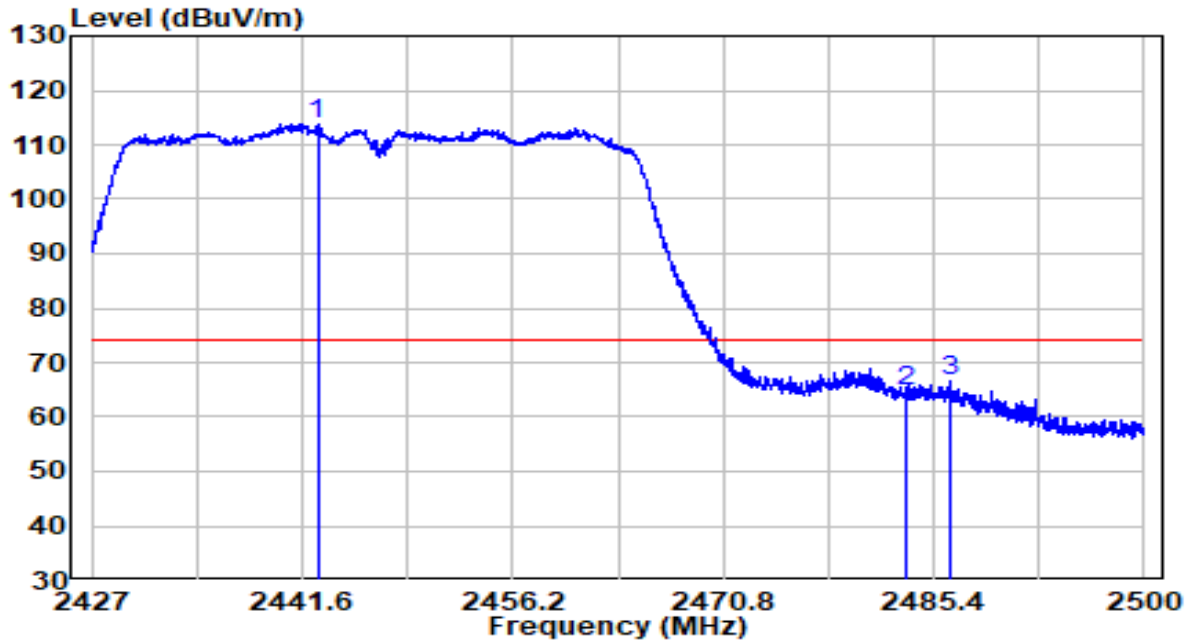


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2442.658	81.37	32.44	113.81	N/A	N/A	Peak
2		2483.500	32.01	32.61	64.62	-9.38	74.00	Peak
3		2486.458	33.86	32.62	66.49	-7.51	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2447MHz	Test Voltage	By PoE

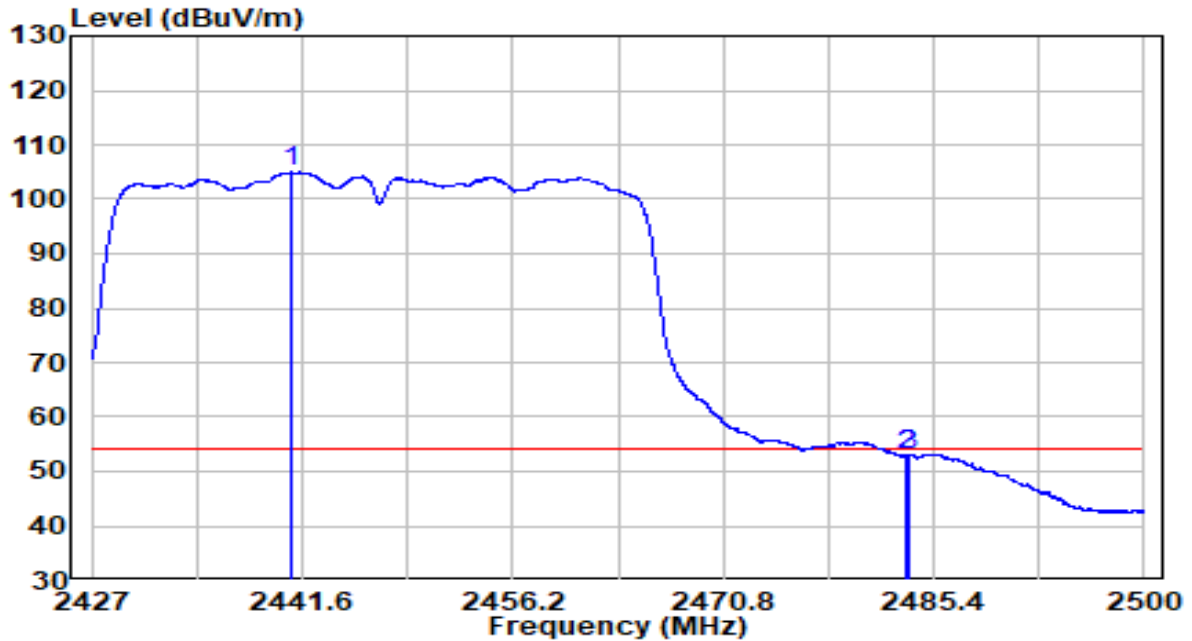


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2440.906	72.57	32.43	105.00	N/A	N/A	Average
2	2483.500	20.35	32.61	52.96	-1.04	54.00	Average
3	2483.721	20.55	32.61	53.16	-0.84	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2452MHz	Test Voltage	By PoE

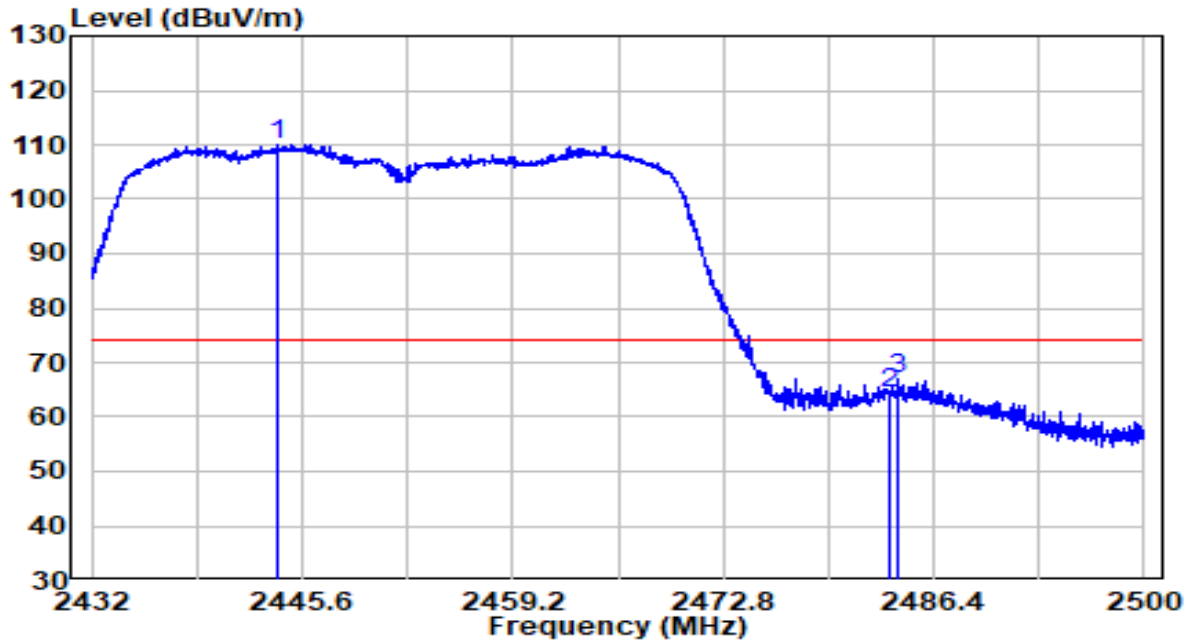


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2444.036	77.72	32.44	110.17	N/A	N/A	Peak
2	2483.500	31.91	32.61	64.52	-9.48	74.00	Peak
3	2484.088	34.47	32.61	67.08	-6.92	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2452MHz	Test Voltage	By PoE

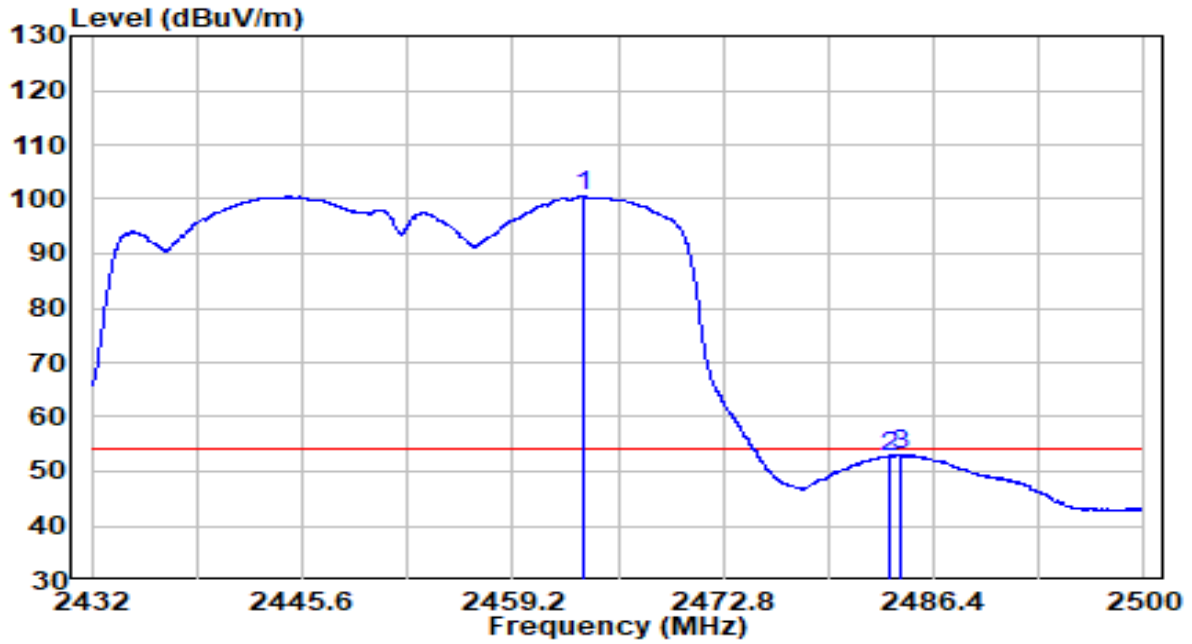


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2463.790	68.04	32.53	100.56	N/A	N/A	Average
2	2483.500	20.21	32.61	52.82	-1.18	54.00	Average
3	2484.190	20.40	32.61	53.01	-0.99	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2452MHz	Test Voltage	By PoE

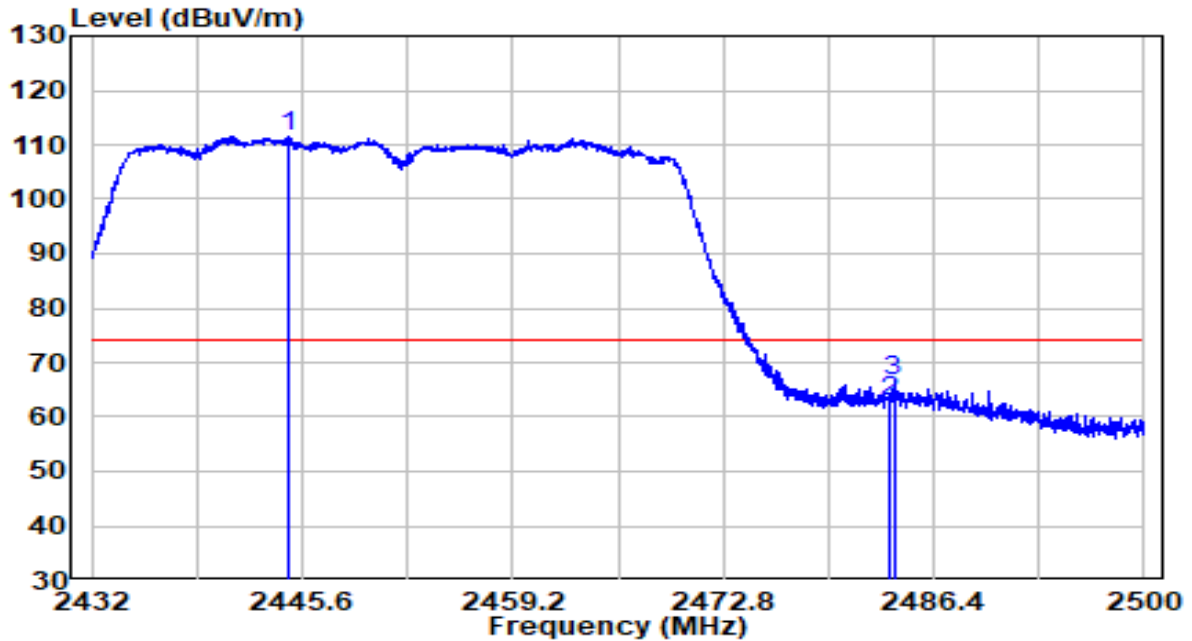


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2444.716	79.15	32.45	111.60	N/A	N/A	Peak
2	2483.500	30.35	32.61	62.96	-11.04	74.00	Peak
3	2483.816	33.97	32.61	66.58	-7.42	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2452MHz	Test Voltage	By PoE

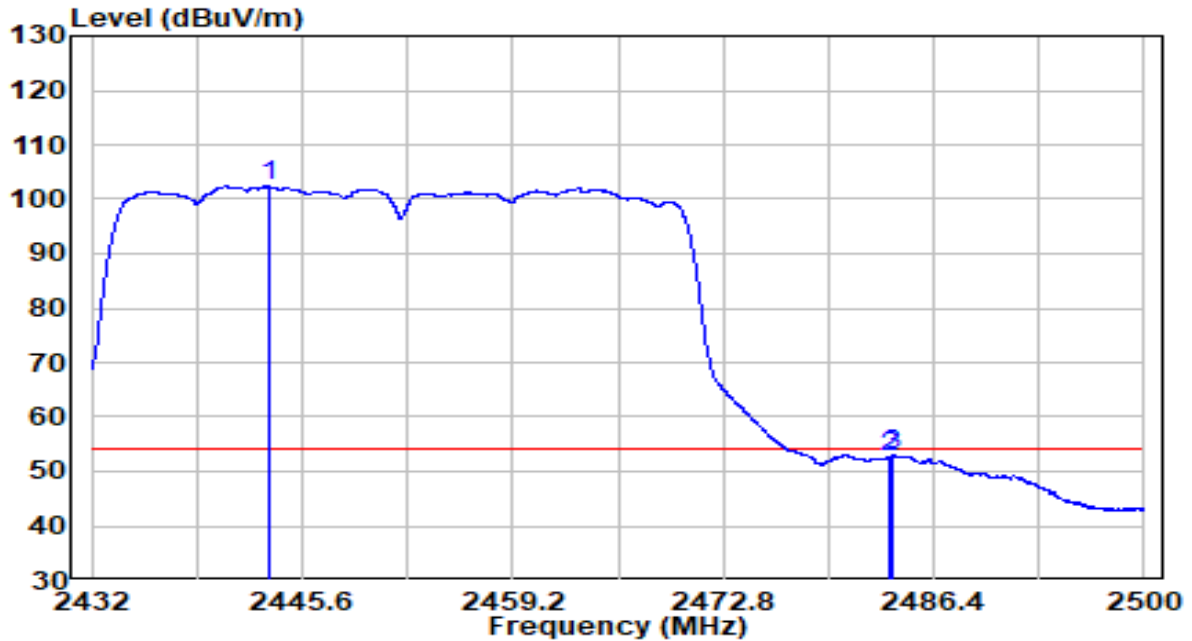


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2443.390	69.92	32.44	102.36	N/A	N/A	Average
2	2483.500	20.06	32.61	52.67	-1.33	54.00	Average
3	2483.680	20.25	32.61	52.86	-1.14	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz	Test Voltage	By PoE

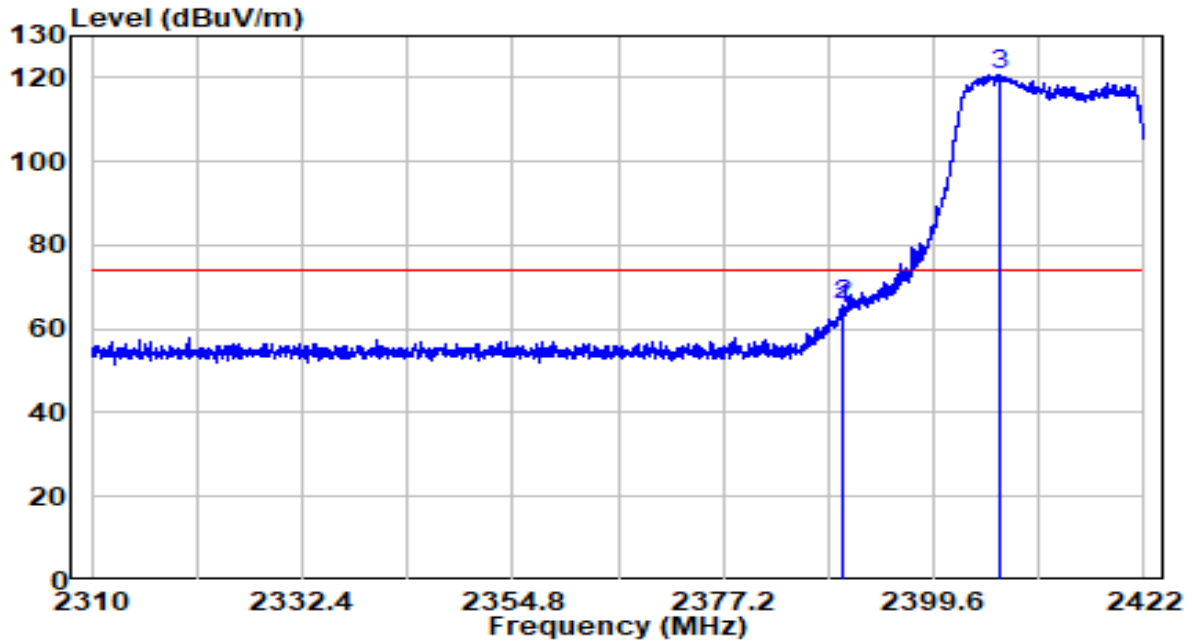


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.856	32.64	32.22	64.86	-9.14	74.00	Peak
2	2390.024	33.61	32.22	65.83	-8.17	74.00	Peak
3	* 2406.712	88.33	32.29	120.62	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz	Test Voltage	By PoE

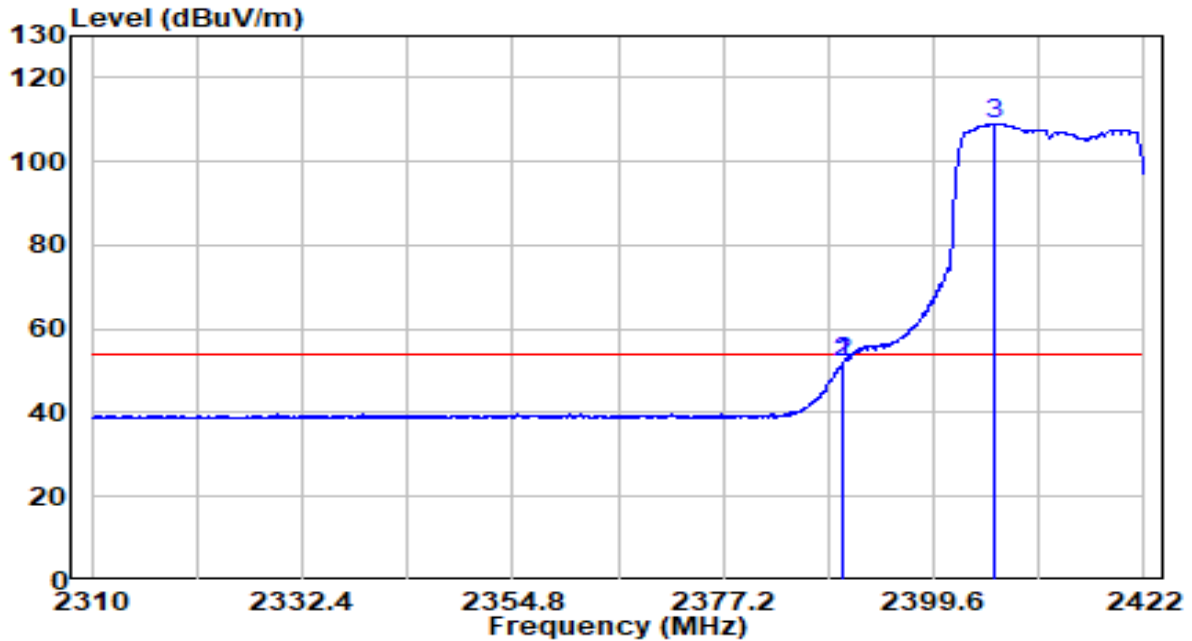


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.968	19.96	32.22	52.18	-1.82	54.00	Average
2	2390.000	19.97	32.22	52.19	-1.81	54.00	Average
3	* 2405.928	76.67	32.28	108.95	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz	Test Voltage	By PoE

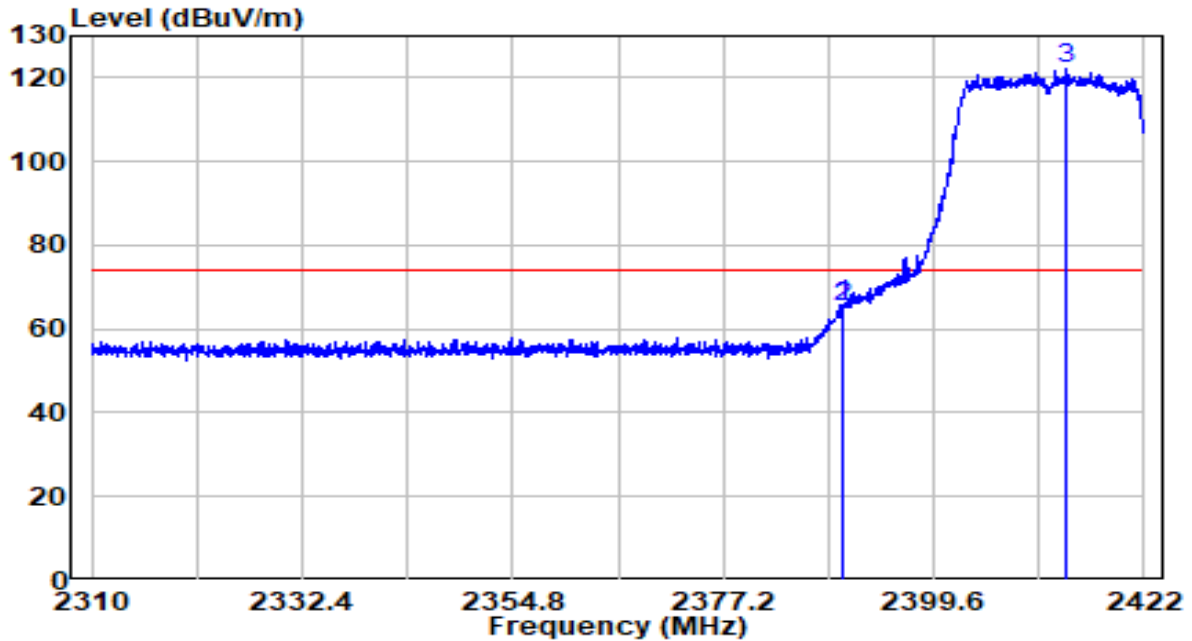


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.912	33.74	32.22	65.95	-8.05	74.00	Peak
2	2390.024	33.09	32.22	65.30	-8.70	74.00	Peak
3	* 2413.656	89.83	32.32	122.15	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz	Test Voltage	By PoE

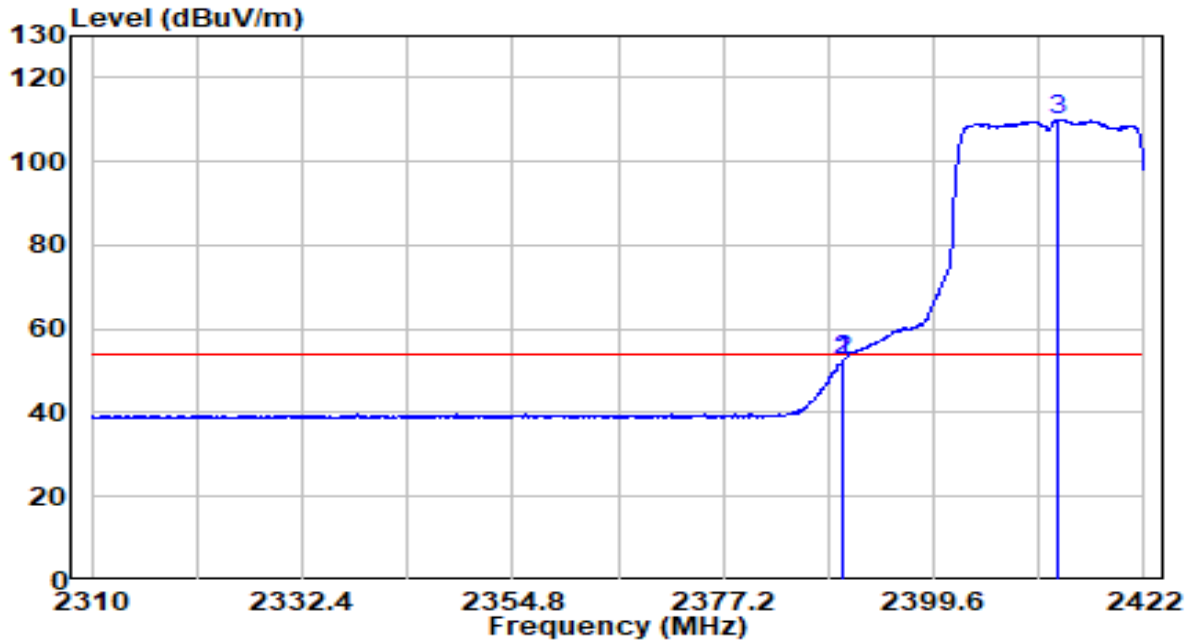


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.968	20.37	32.22	52.59	-1.41	54.00	Average
2	2390.000	20.43	32.22	52.65	-1.35	54.00	Average
3	* 2412.872	77.75	32.31	110.06	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2452MHz	Test Voltage	By PoE

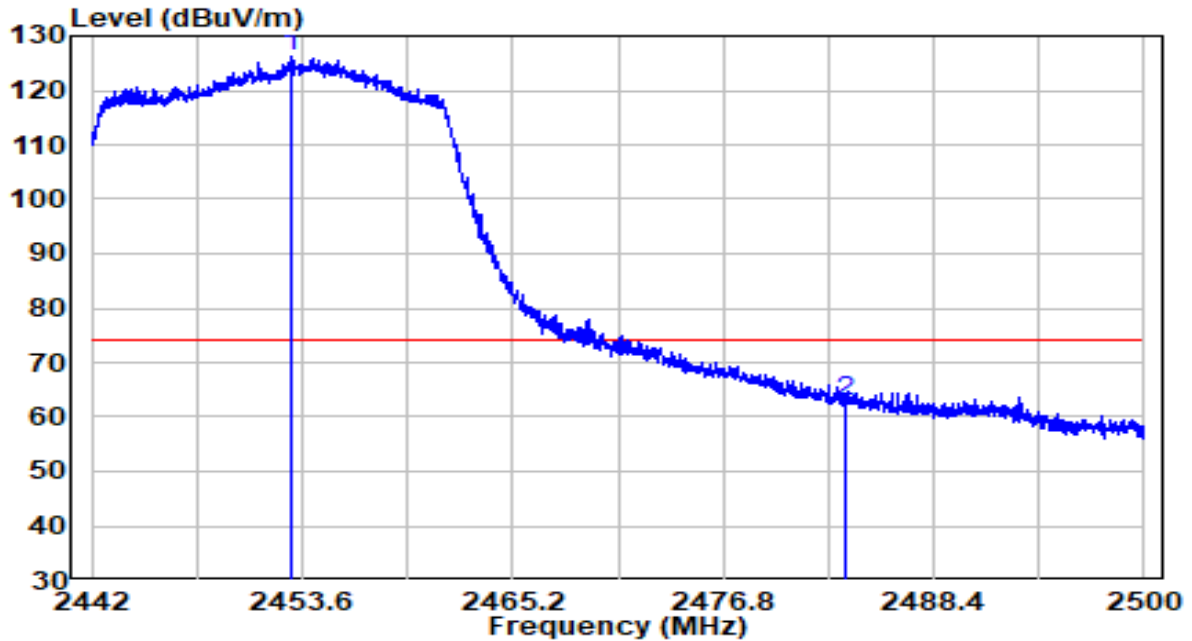


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	*	93.74	32.48	126.23	N/A	N/A	Peak
2		30.17	32.61	62.78	-11.22	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2452MHz	Test Voltage	By PoE

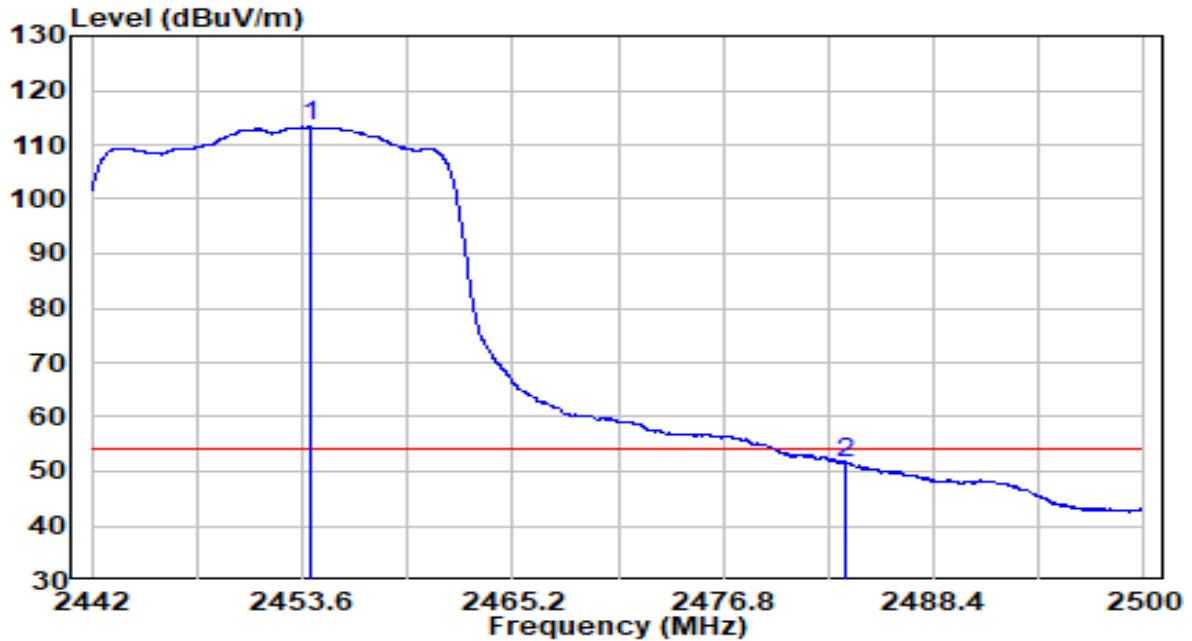


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)	
1	*	2454.006	80.75	32.49	113.24	N/A	N/A	Average
2		2483.500	19.09	32.61	51.70	-2.30	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2452MHz	Test Voltage	By PoE

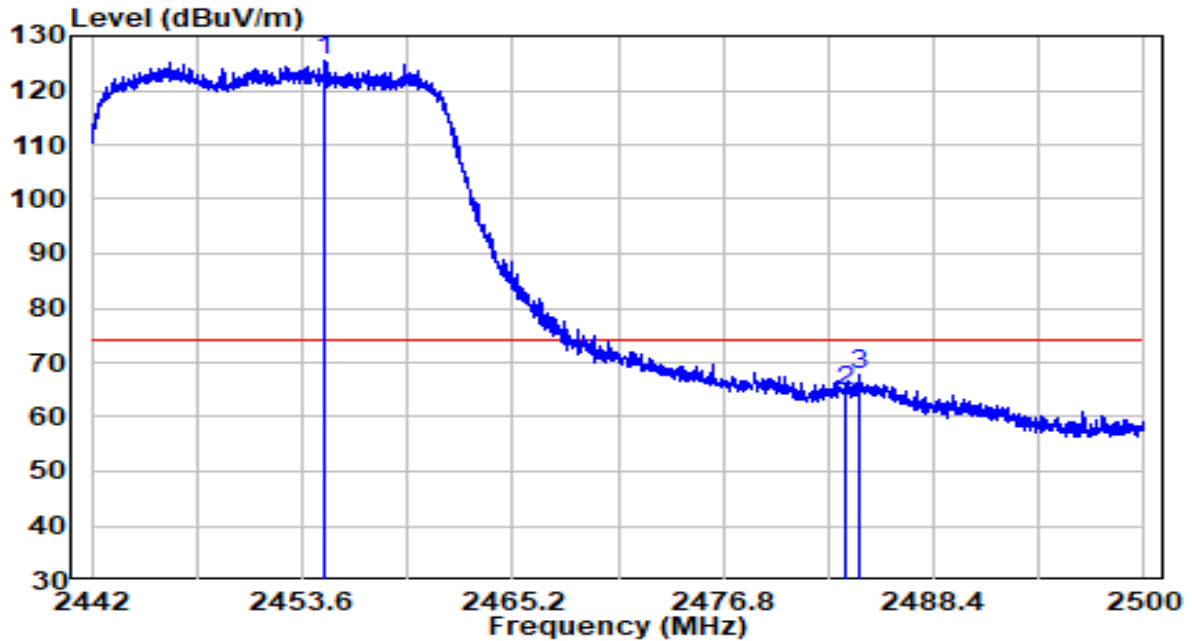


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	93.08	32.49	125.57	N/A	N/A	Peak
2		31.99	32.61	64.61	-9.39	74.00	Peak
3		34.98	32.61	67.60	-6.40	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2452MHz	Test Voltage	By PoE

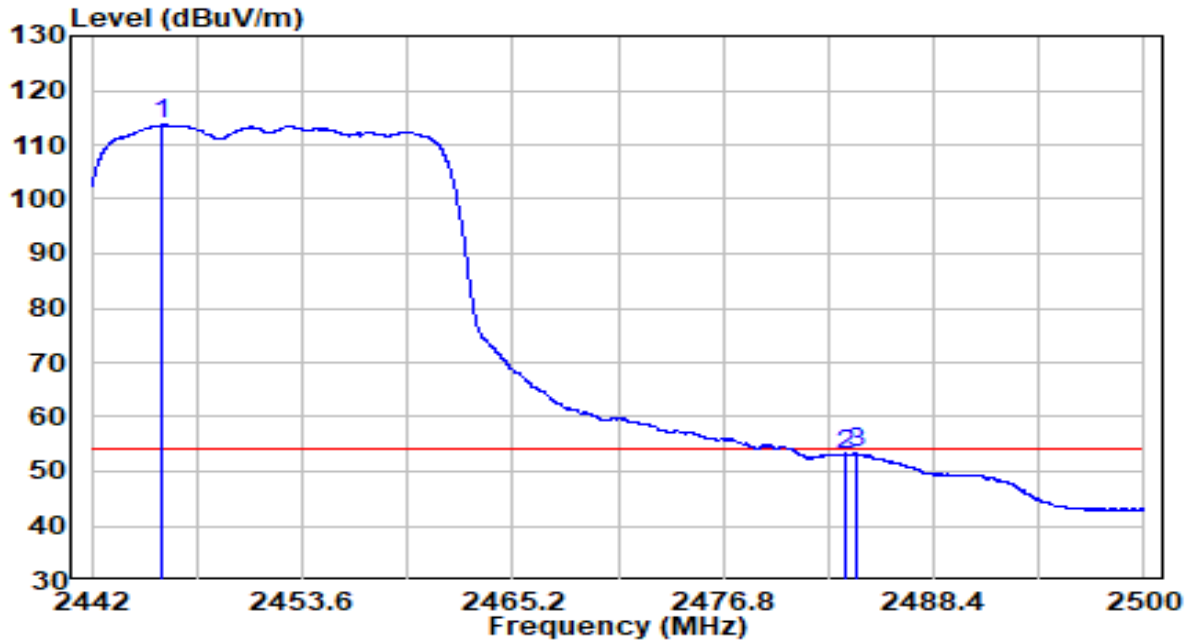


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2445.915	81.16	32.45	113.62	N/A	N/A	Average
2	2483.500	20.55	32.61	53.16	-0.84	54.00	Average
3	2484.079	20.63	32.61	53.24	-0.76	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2457MHz	Test Voltage	By PoE

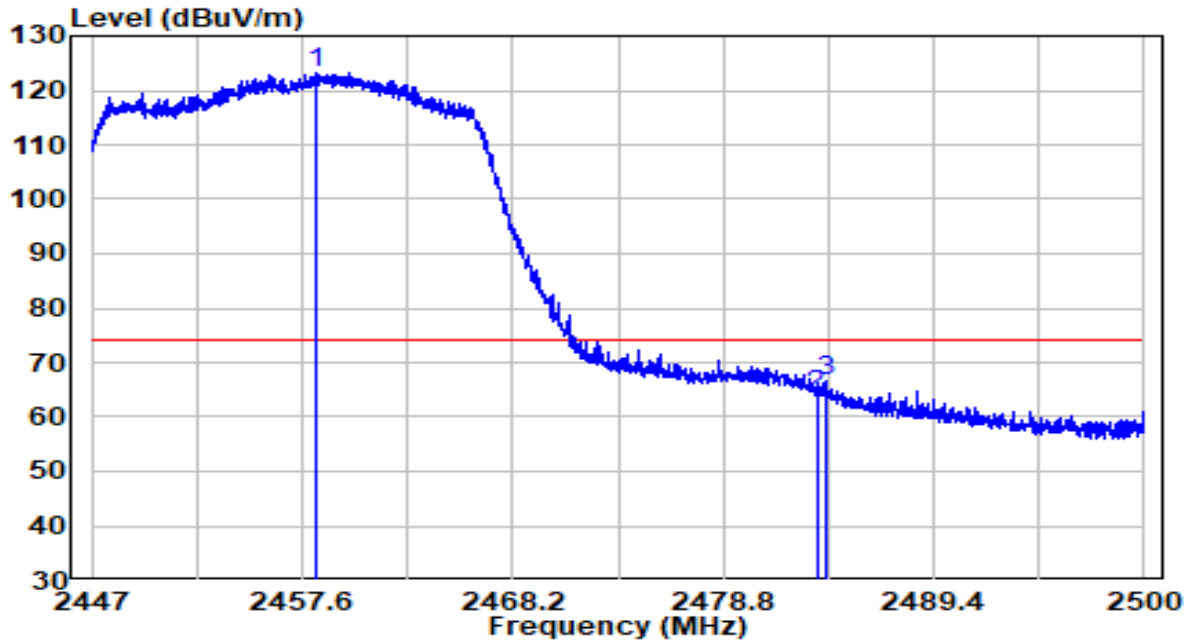


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2458.236	90.84	32.50	123.34	N/A	N/A	Peak
2	2483.500	31.18	32.61	63.79	-10.21	74.00	Peak
3	2484.021	34.14	32.61	66.75	-7.25	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2457MHz	Test Voltage	By PoE

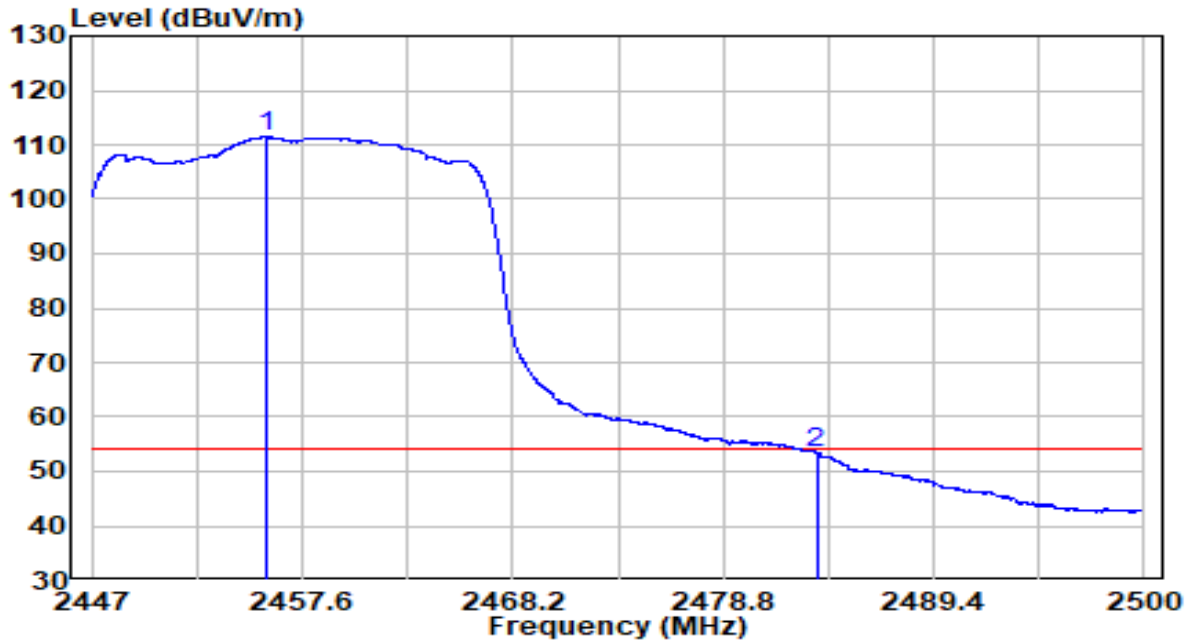


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	78.94	32.49	111.44	N/A	N/A	Average
2		20.85	32.61	53.47	-0.53	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2457MHz	Test Voltage	By PoE

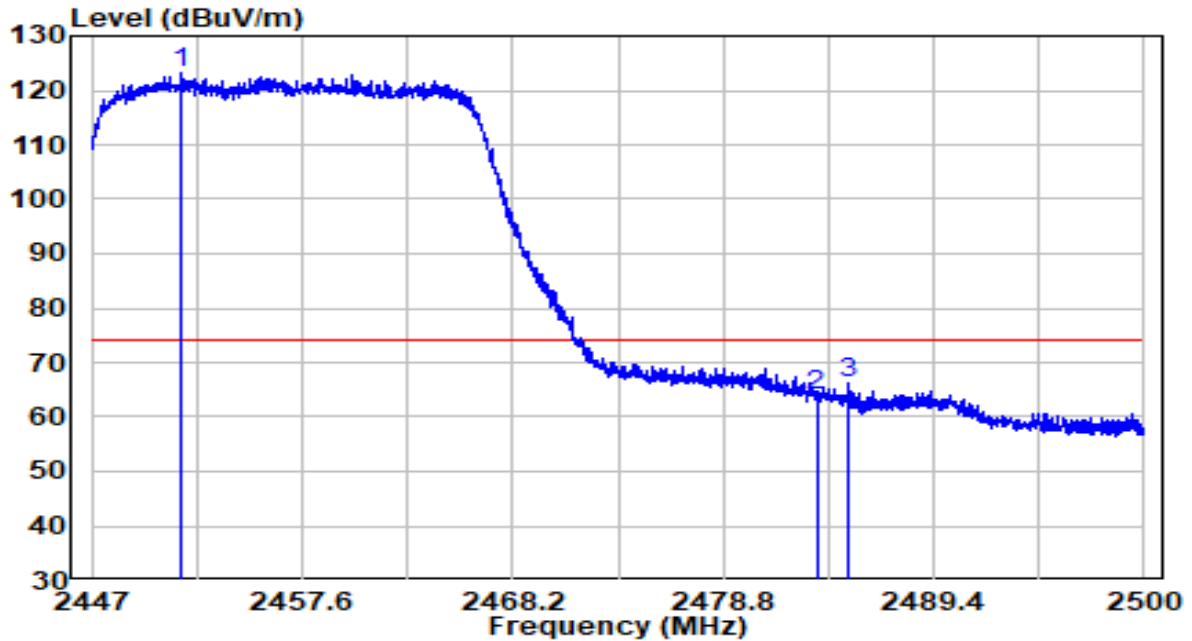


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2451.479	90.90	32.48	123.37	N/A	N/A	Peak
2	2483.500	31.18	32.61	63.79	-10.21	74.00	Peak
3	2485.107	33.64	32.62	66.26	-7.74	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2457MHz	Test Voltage	By PoE

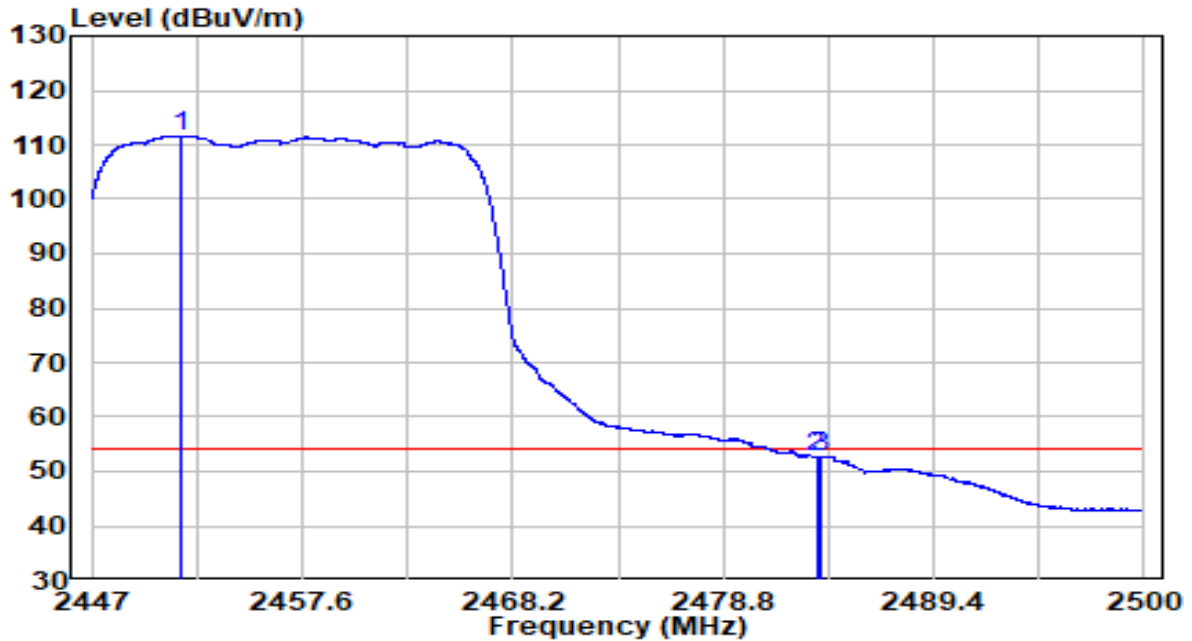


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2451.479	79.19	32.48	111.67	N/A	N/A	Average
2	2483.500	19.95	32.61	52.56	-1.44	54.00	Average
3	2483.756	20.18	32.61	52.79	-1.21	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz	Test Voltage	By PoE

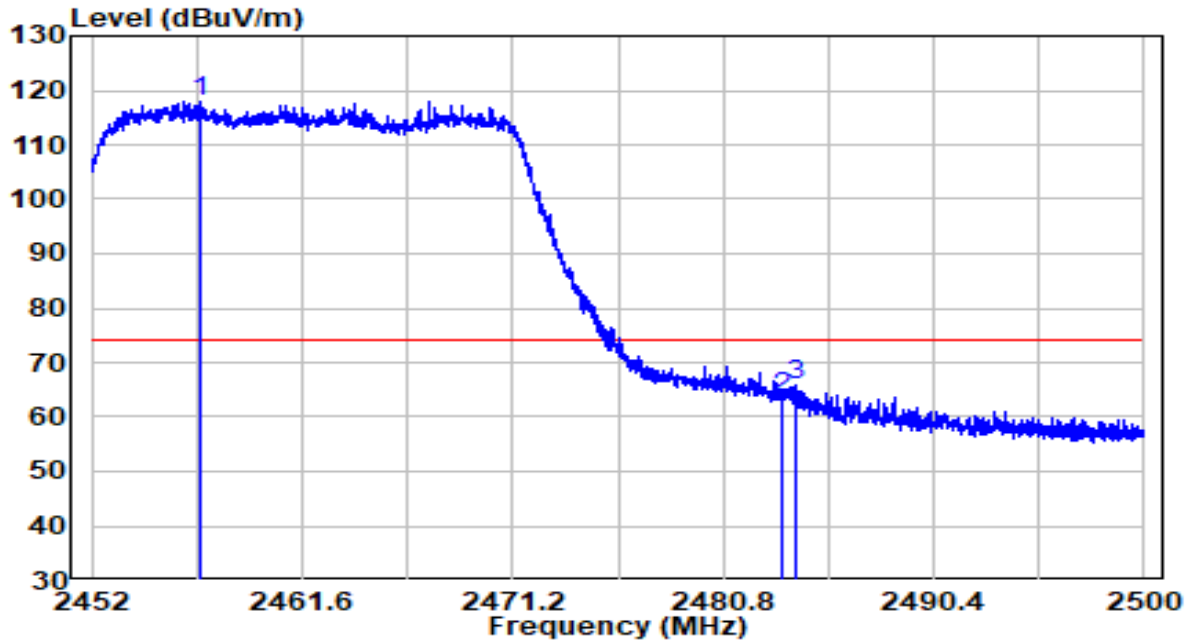


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2456.992	85.32	32.50	117.82	N/A	N/A	Peak
2	2483.500	31.00	32.61	63.61	-10.39	74.00	Peak
3	2484.160	33.22	32.61	65.84	-8.16	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz	Test Voltage	By PoE

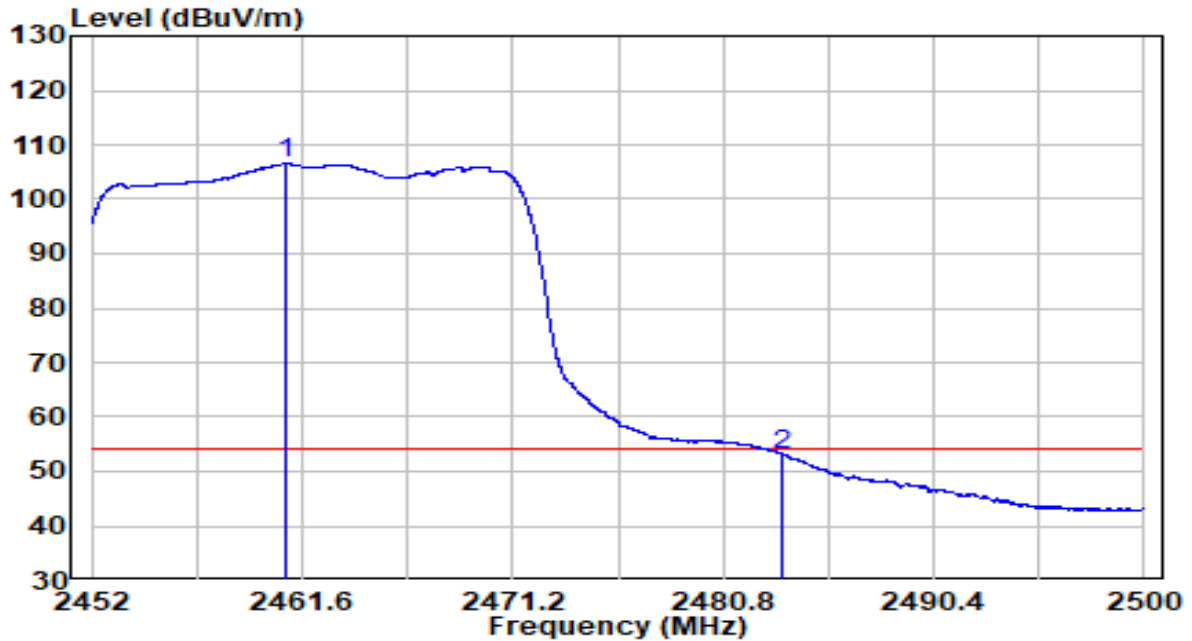


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2460.856	74.00	32.52	106.51	N/A	N/A	Average
2	2483.488	20.58	32.61	53.19	-0.81	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz	Test Voltage	By PoE

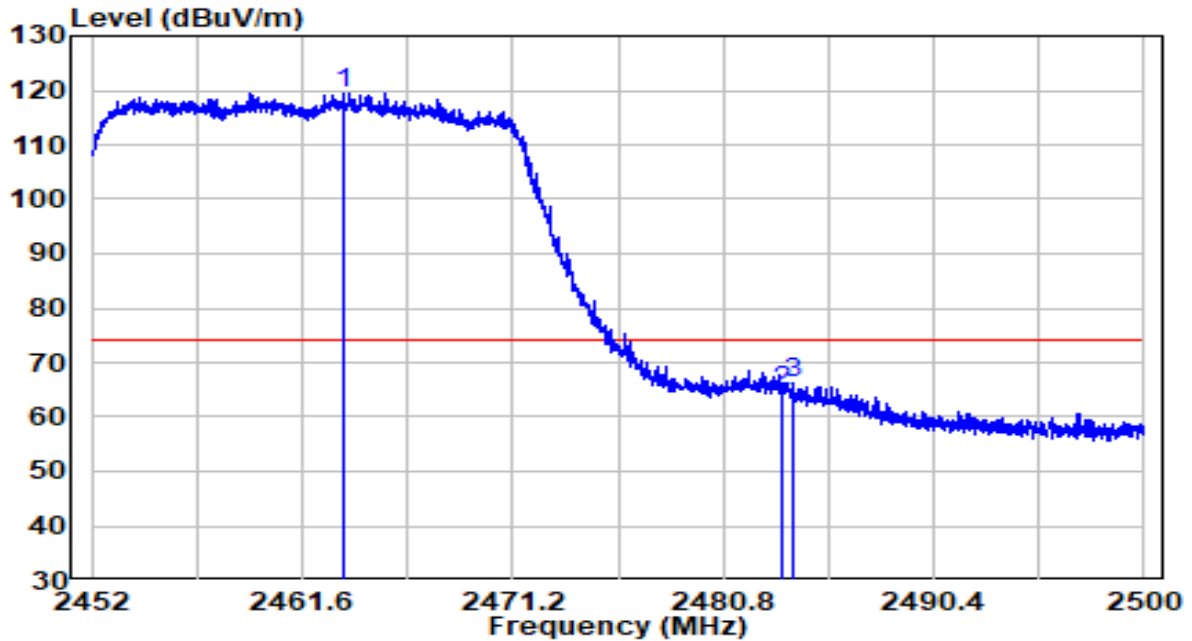


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2463.496	86.84	32.53	119.36	N/A	N/A	Peak
2	2483.500	32.05	32.61	64.66	-9.34	74.00	Peak
3	2483.968	33.47	32.61	66.09	-7.91	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz	Test Voltage	By PoE

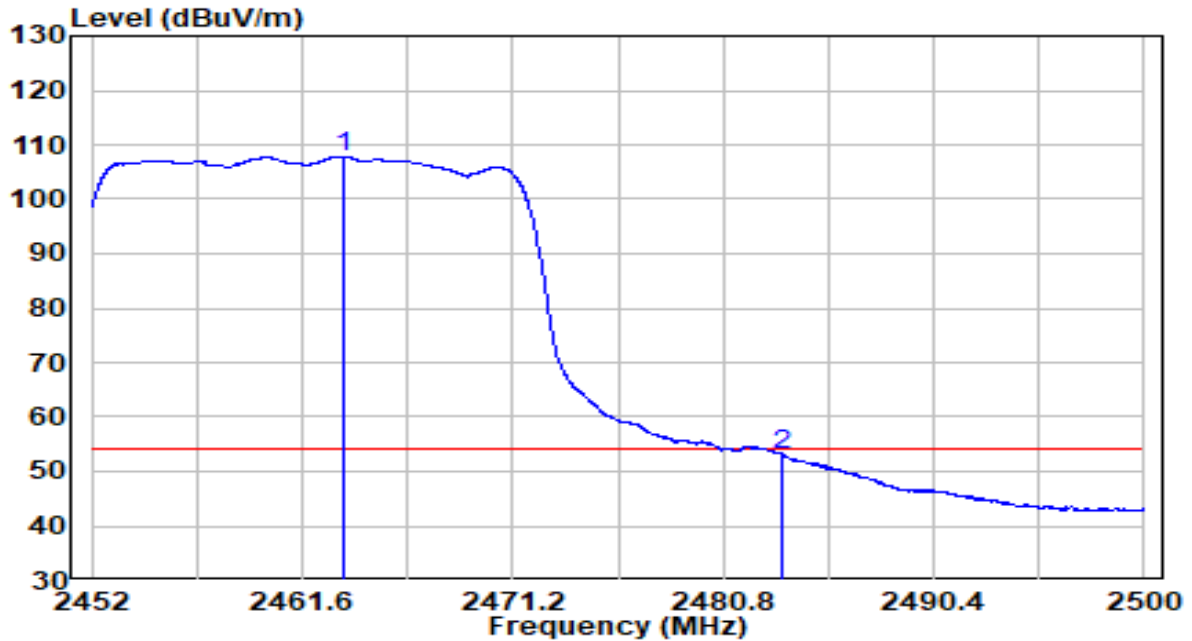


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2463.544	75.27	32.53	107.80	N/A	N/A	Average
2	2483.488	20.49	32.61	53.10	-0.90	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	By PoE

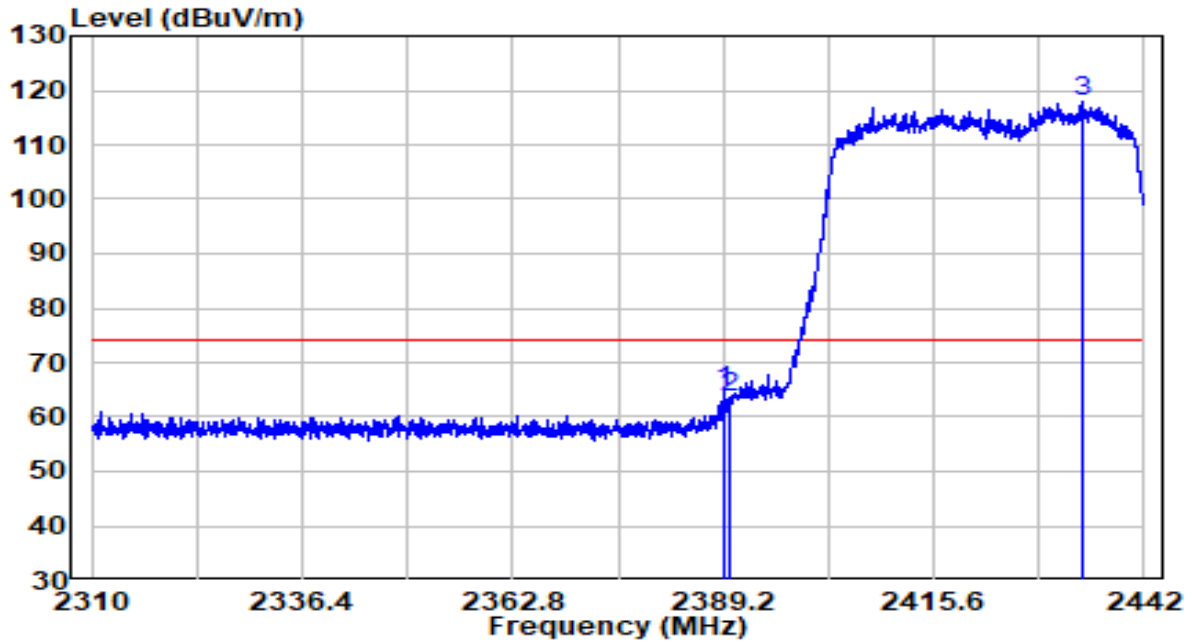


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2389.332	32.52	32.22	64.74	-9.26	74.00	Peak
2	2390.000	31.52	32.22	63.74	-10.26	74.00	Peak
3	* 2434.146	85.53	32.40	117.93	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	By PoE

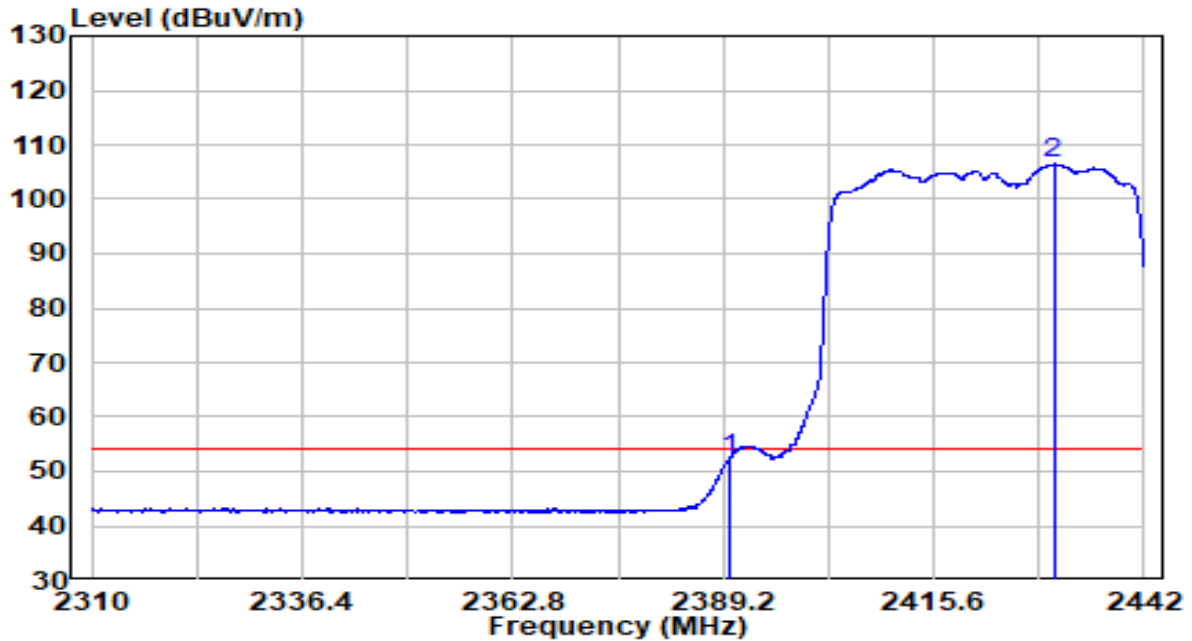


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2389.992	20.06	32.22	52.28	-1.72	54.00	Average
2	* 2430.648	74.03	32.39	106.42	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	By PoE

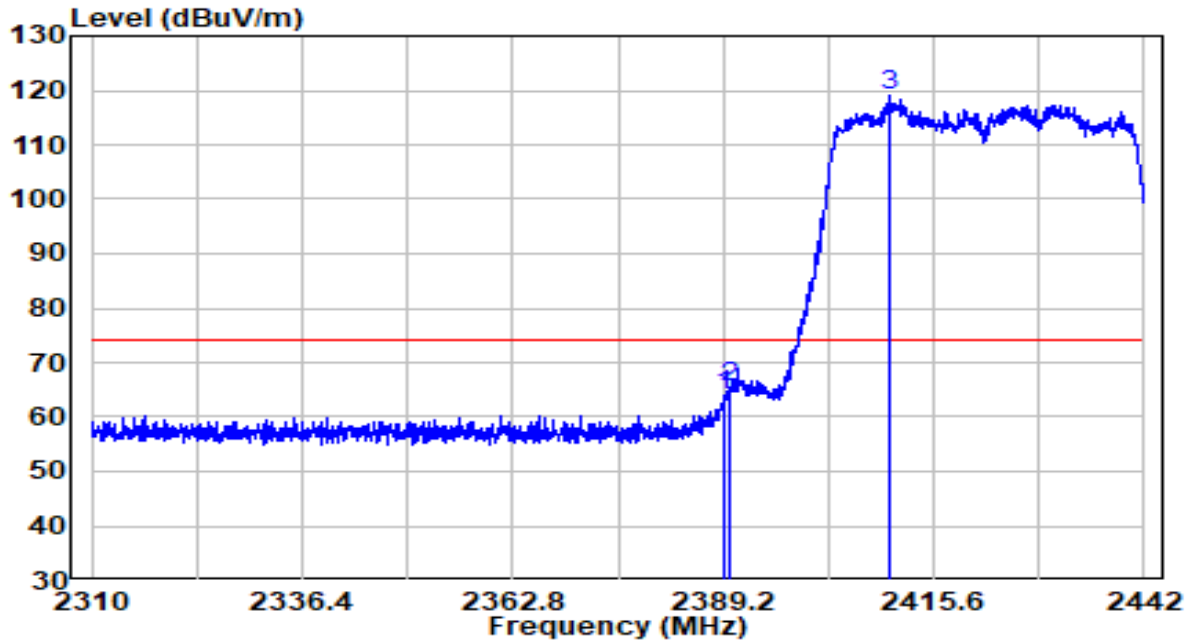


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2389.332	31.73	32.22	63.94	-10.06	74.00	Peak
2	2390.000	33.16	32.22	65.38	-8.62	74.00	Peak
3	* 2410.056	86.67	32.30	118.98	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	By PoE

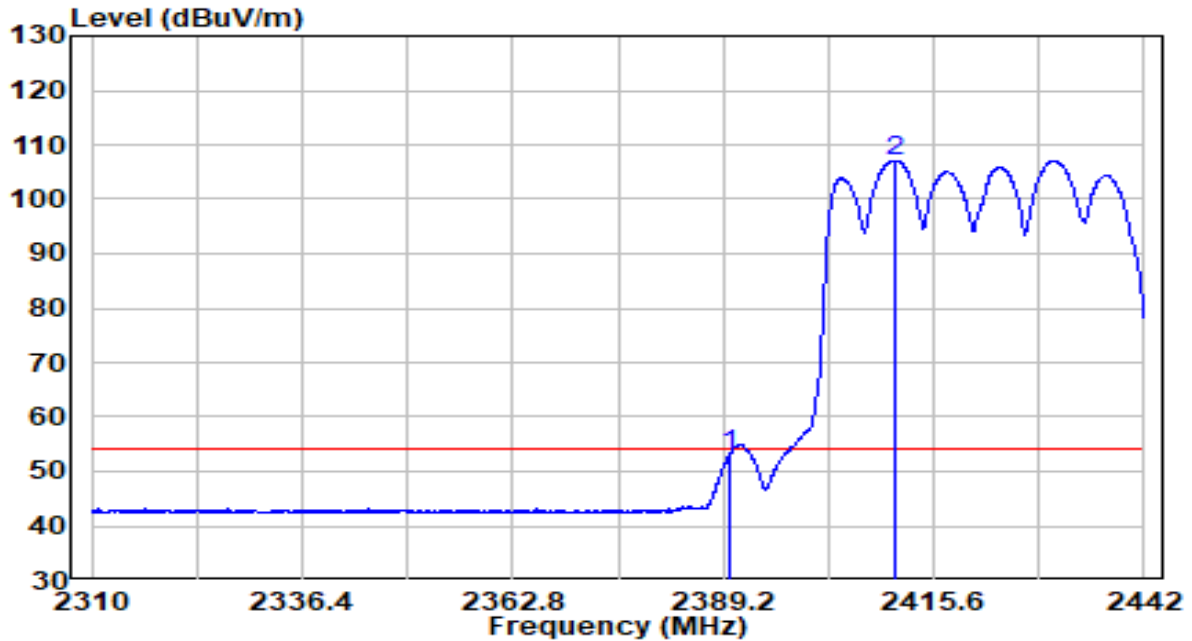


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	20.89	32.22	53.11	-0.89	54.00	Average
2	* 2410.650	74.79	32.30	107.09	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2447MHz	Test Voltage	By PoE

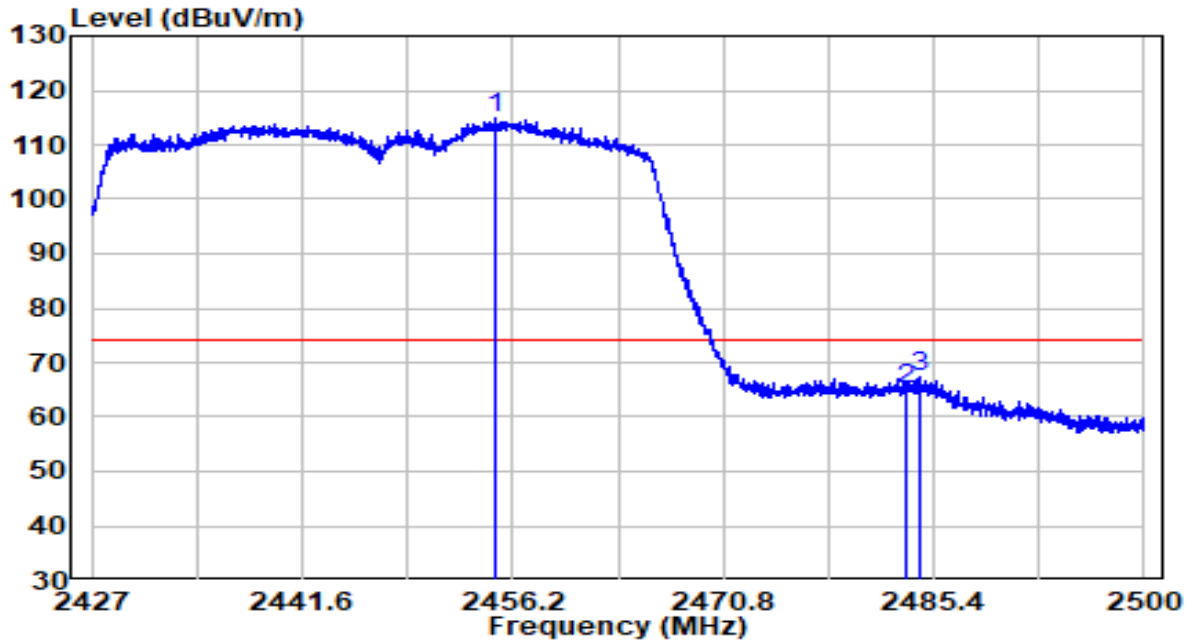


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2454.996	82.33	32.49	114.83	N/A	N/A	Peak
2	2483.500	32.45	32.61	65.06	-8.94	74.00	Peak
3	2484.488	34.84	32.61	67.45	-6.55	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2447MHz	Test Voltage	By PoE

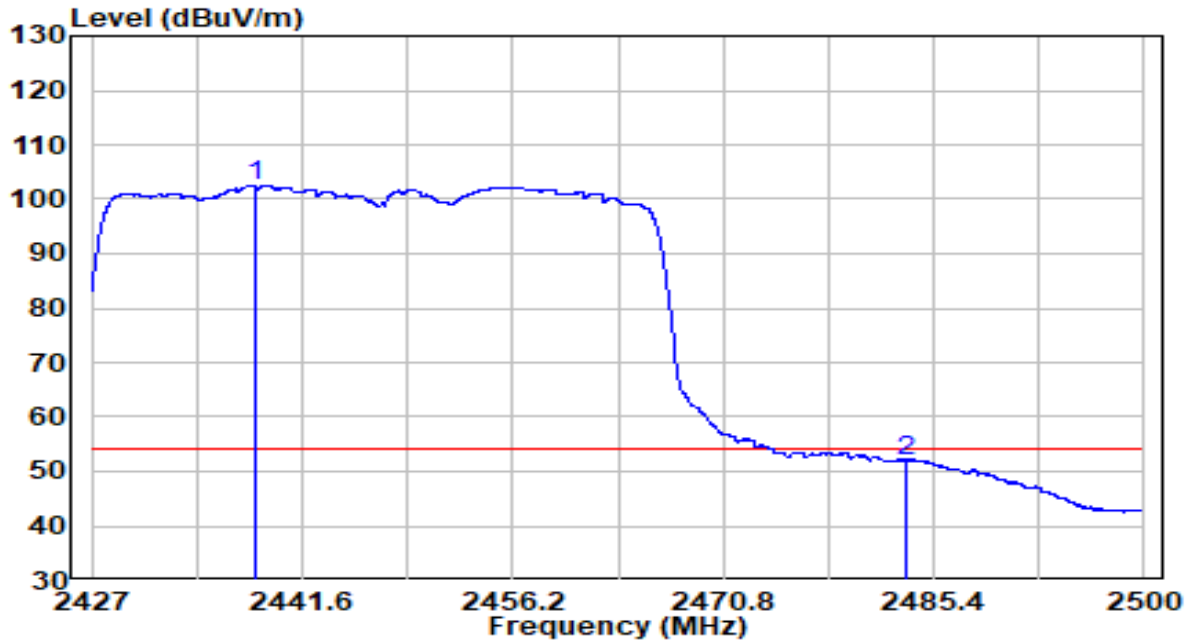


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	*	70.12	32.42	102.54	N/A	N/A	Average
2		19.36	32.61	51.97	-2.03	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2447MHz	Test Voltage	By PoE

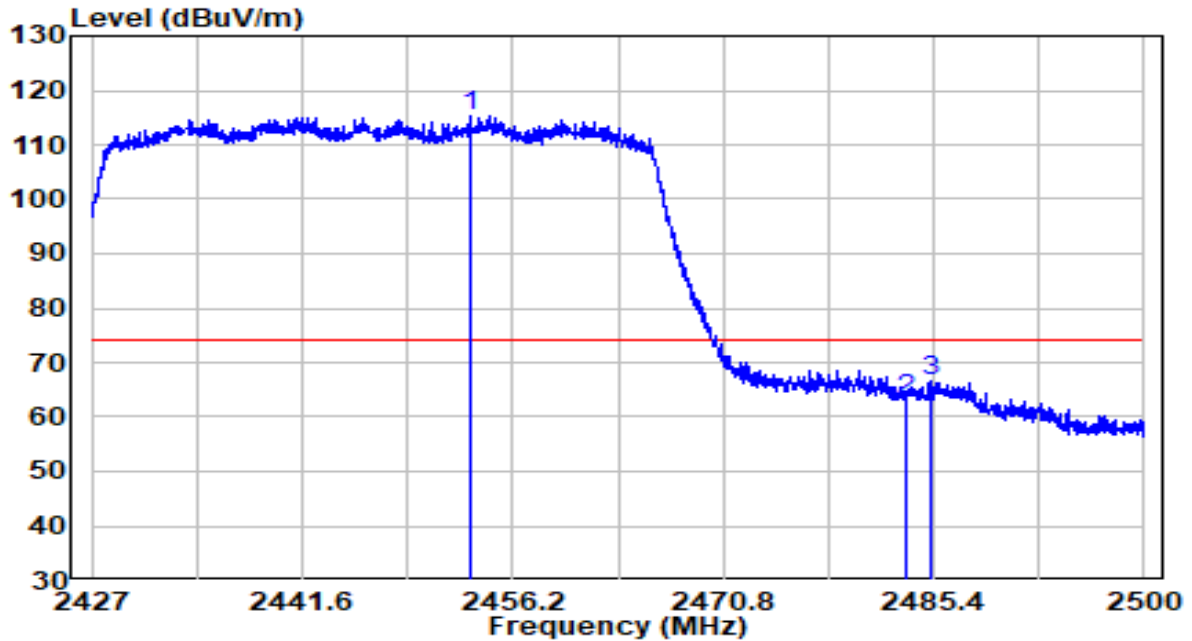


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2453.280	82.67	32.48	115.15	N/A	N/A	Peak
2		2483.500	30.74	32.61	63.35	-10.65	74.00	Peak
3		2485.181	33.97	32.62	66.59	-7.41	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2447MHz	Test Voltage	By PoE

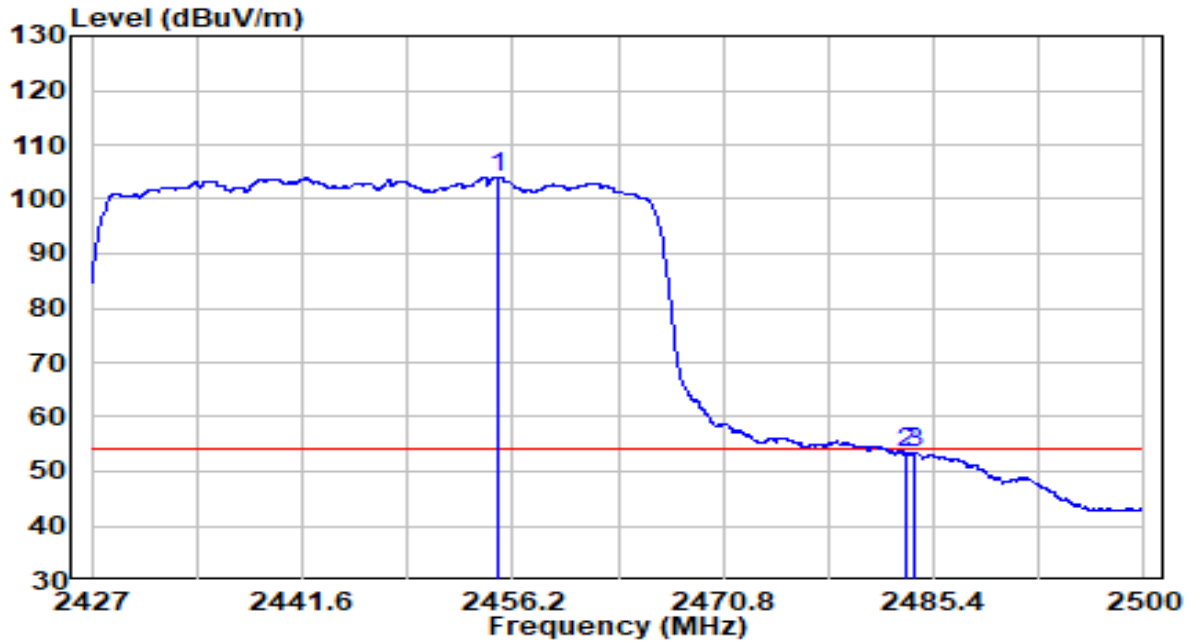


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2455.142	71.50	32.49	104.00	N/A	N/A	Average
2	2483.500	20.78	32.61	53.40	-0.60	54.00	Average
3	2484.123	20.81	32.61	53.42	-0.58	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	By PoE

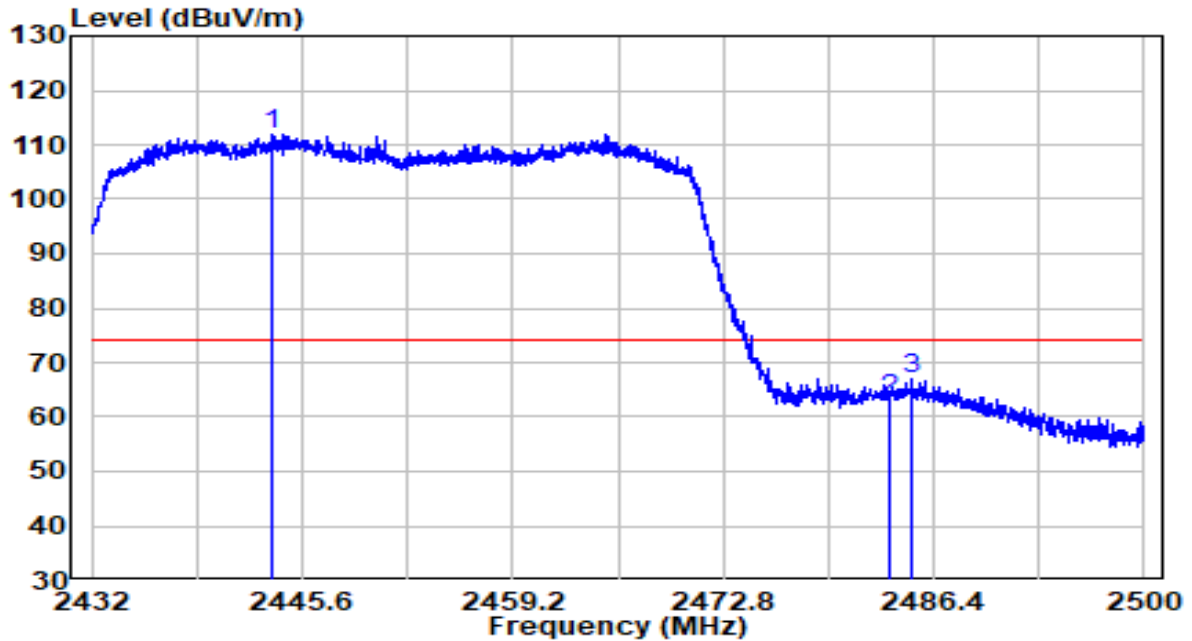


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2443.594	79.56	32.44	112.00	N/A	N/A	Peak
2	2483.500	30.59	32.61	63.21	-10.79	74.00	Peak
3	2485.040	34.36	32.62	66.98	-7.02	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	By PoE

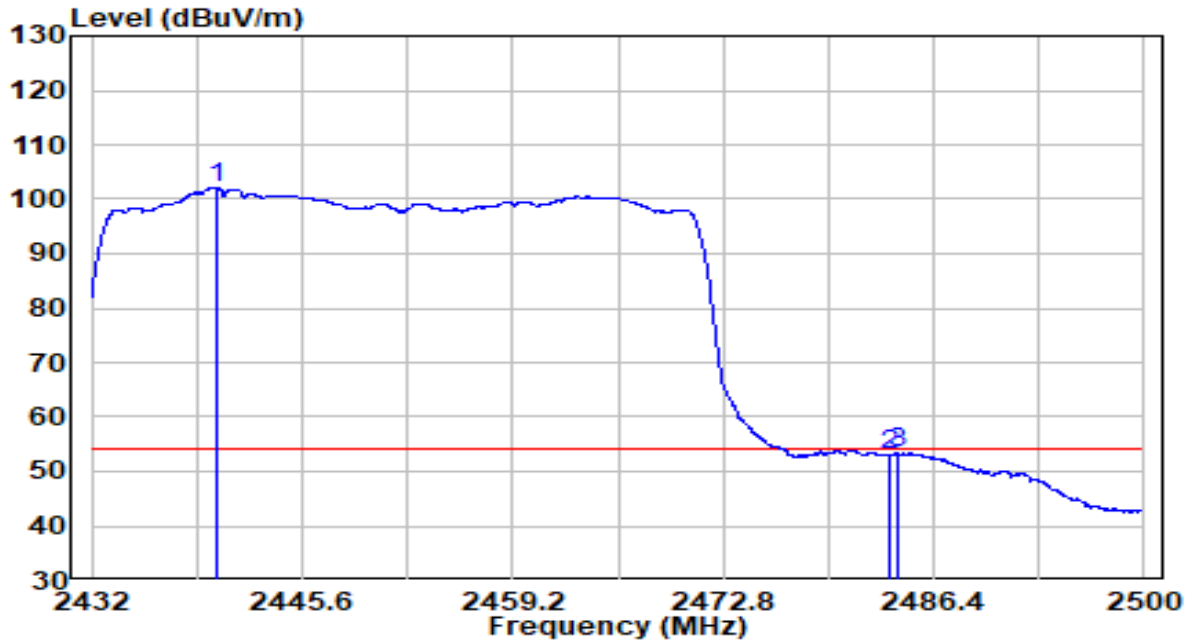


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	69.67	32.43	102.10	N/A	N/A	Average
2		20.38	32.61	52.99	-1.01	54.00	Average
3		20.77	32.61	53.39	-0.61	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	By PoE

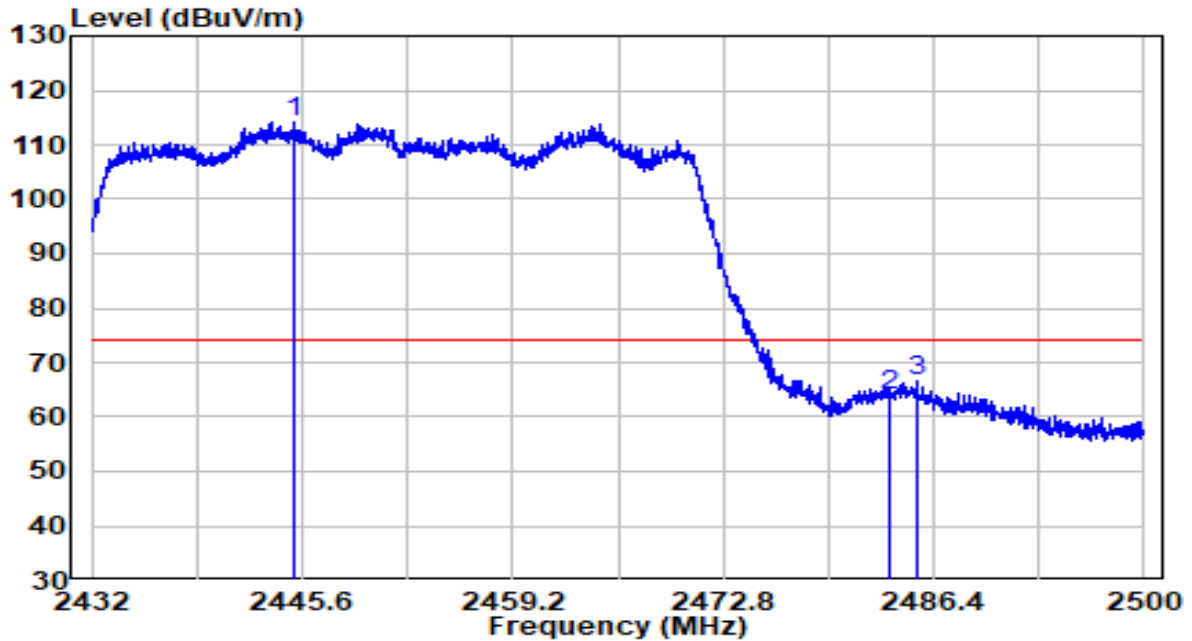


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2445.056	81.82	32.45	114.27	N/A	N/A	Peak
2		2483.500	31.47	32.61	64.08	-9.92	74.00	Peak
3		2485.278	34.13	32.62	66.75	-7.25	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	By PoE

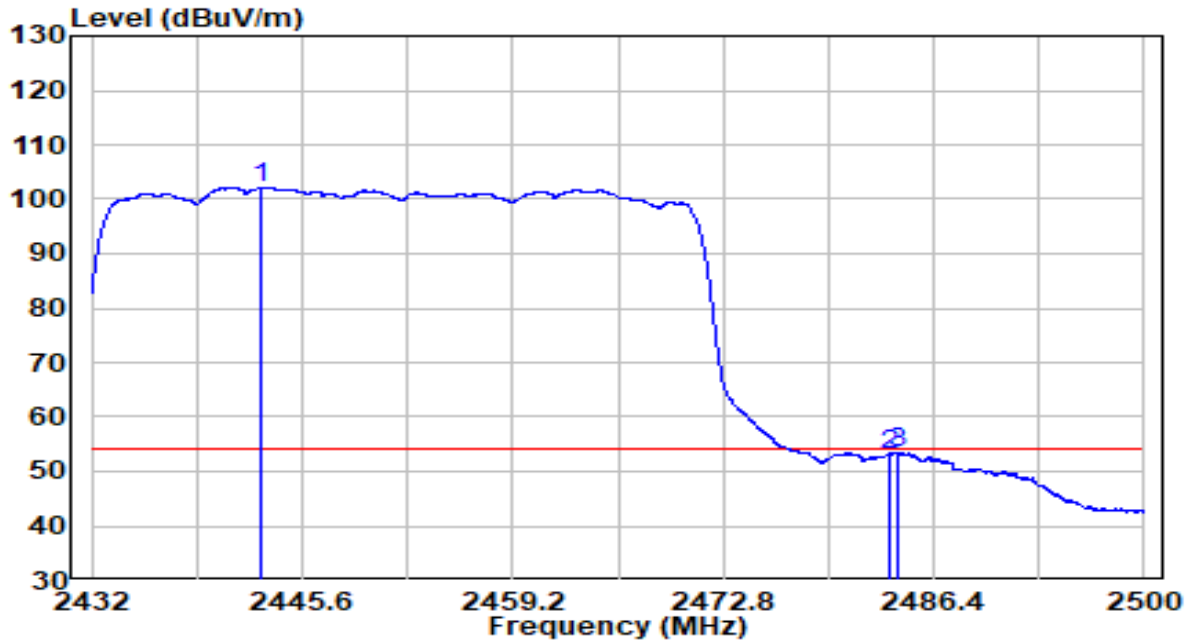


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	69.73	32.44	102.17	N/A	N/A	Average
2		20.53	32.61	53.14	-0.86	54.00	Average
3		20.80	32.61	53.42	-0.58	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

### APEX0585 Filter 2#

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2412MHz	Test Voltage	By PoE

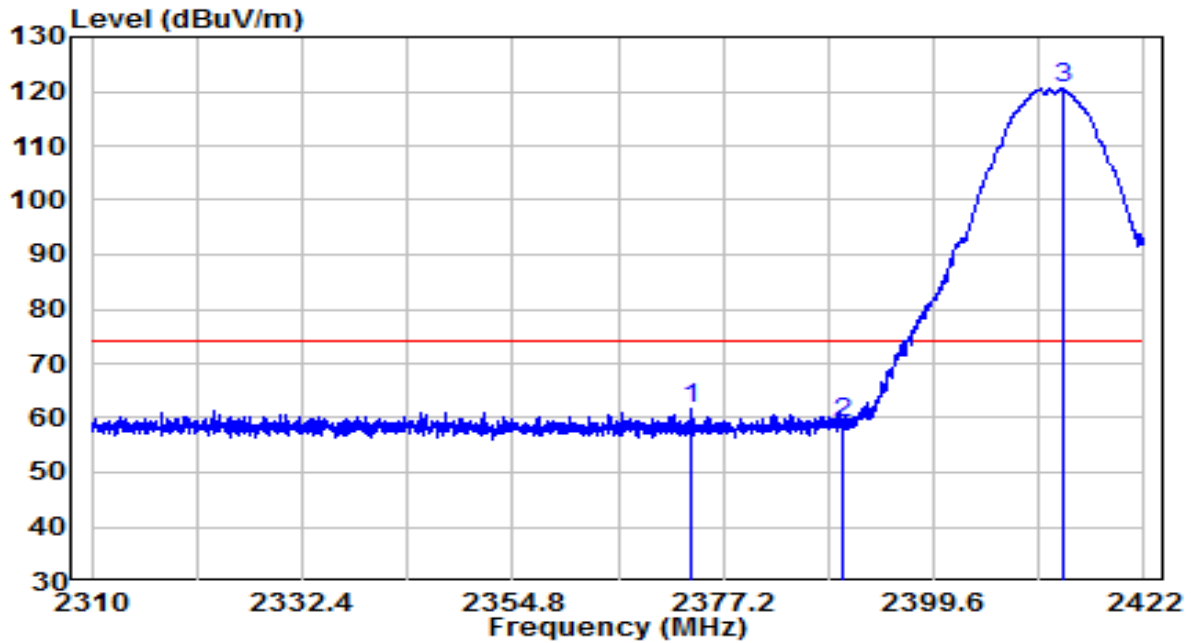


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2373.784	29.40	32.15	61.55	-12.45	74.00	Peak
2	2390.000	26.83	32.22	59.05	-14.95	74.00	Peak
3	* 2413.264	88.17	32.32	120.49	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2412MHz	Test Voltage	By PoE

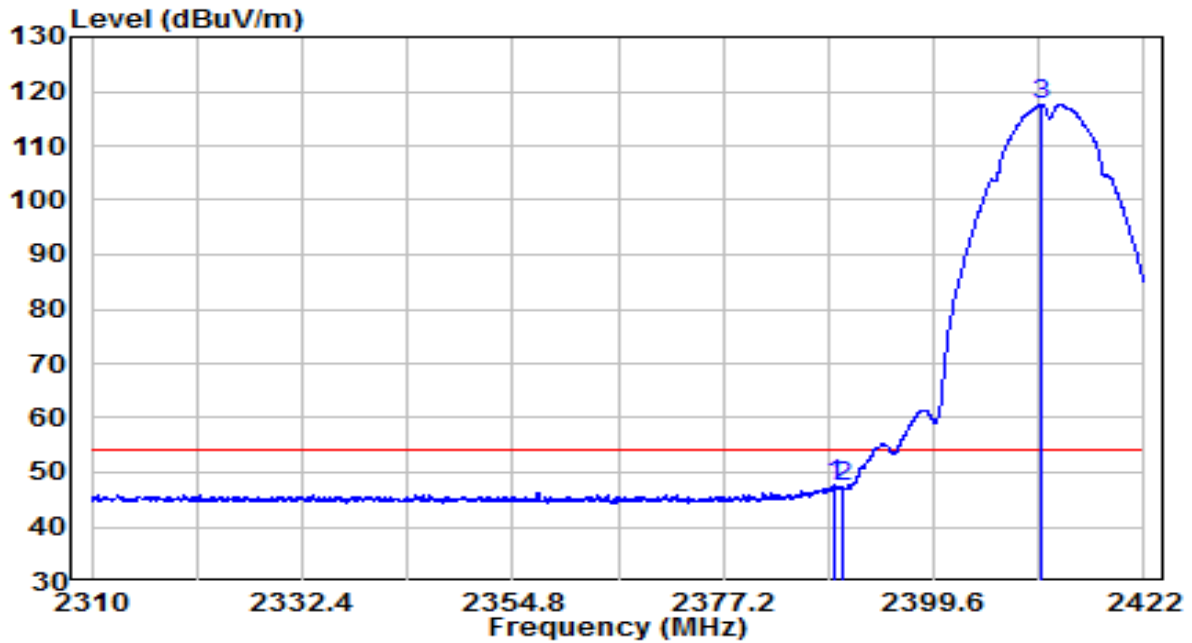


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2388.960	15.57	32.21	47.78	-6.22	54.00	Average
2	2390.000	15.01	32.22	47.23	-6.77	54.00	Average
3	* 2411.080	85.31	32.31	117.62	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2412MHz	Test Voltage	By PoE

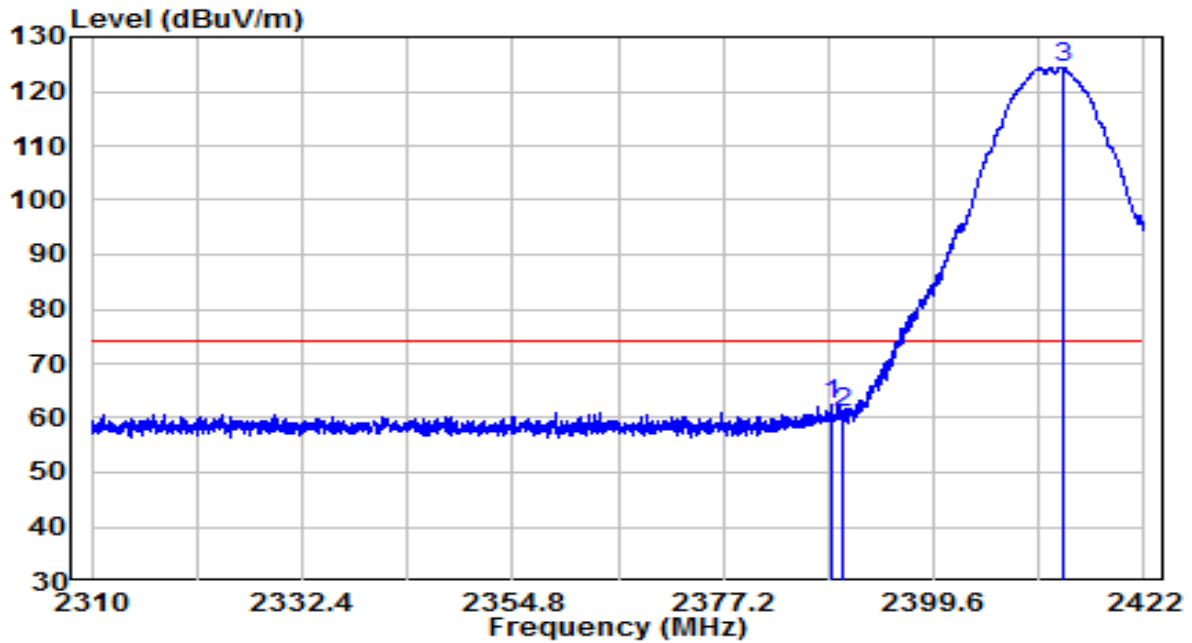


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2388.624	30.36	32.21	62.58	-11.42	74.00	Peak
2	2390.000	28.73	32.22	60.95	-13.05	74.00	Peak
3	* 2413.264	92.06	32.32	124.38	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2412MHz	Test Voltage	By PoE

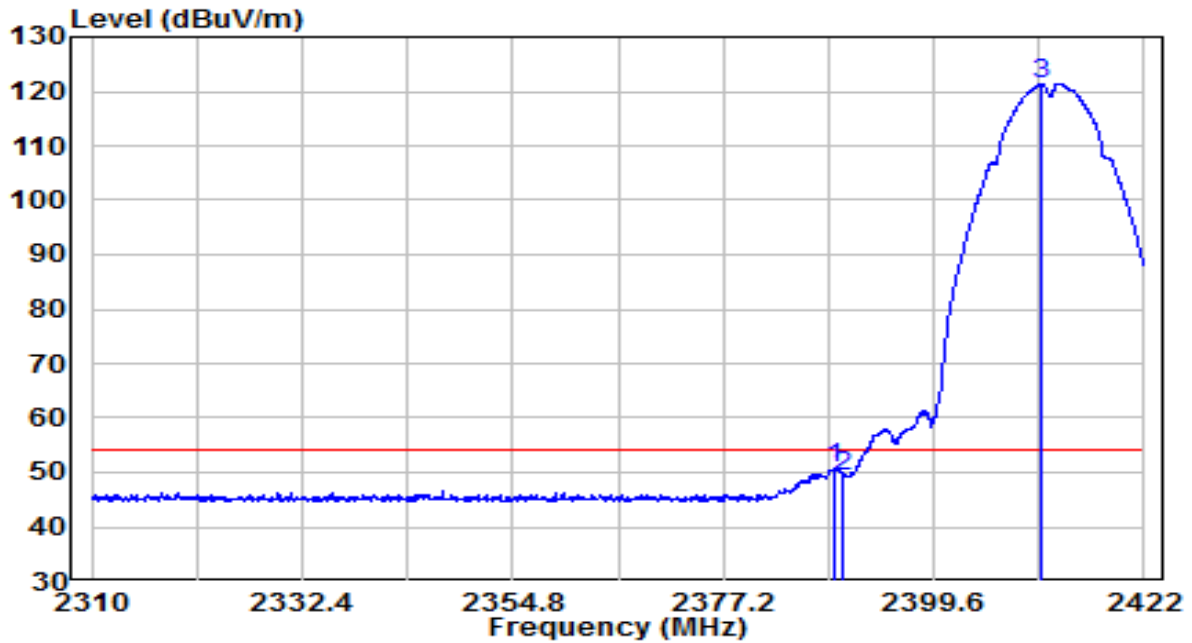


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2389.016	18.47	32.21	50.69	-3.31	54.00	Average
2	2390.000	17.05	32.22	49.27	-4.73	54.00	Average
3	* 2411.136	89.10	32.31	121.40	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2412MHz	Test Voltage	By PoE

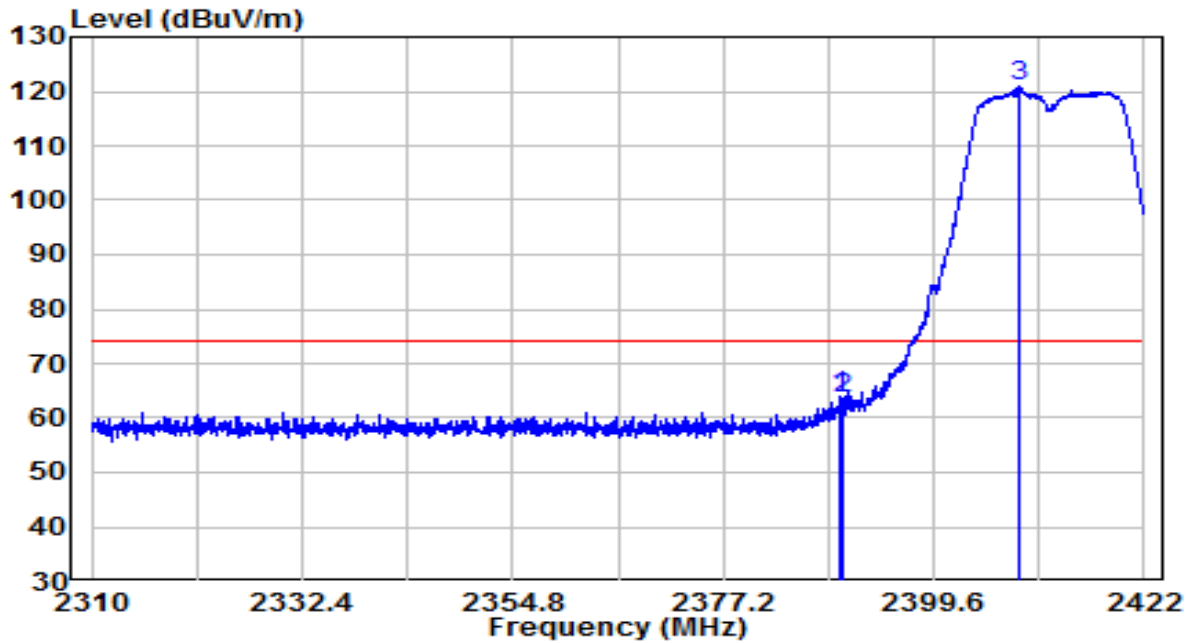


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.744	31.83	32.22	64.05	-9.95	74.00	Peak
2	2390.000	31.27	32.22	63.49	-10.51	74.00	Peak
3	* 2408.616	88.75	32.30	121.04	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2412MHz	Test Voltage	By PoE

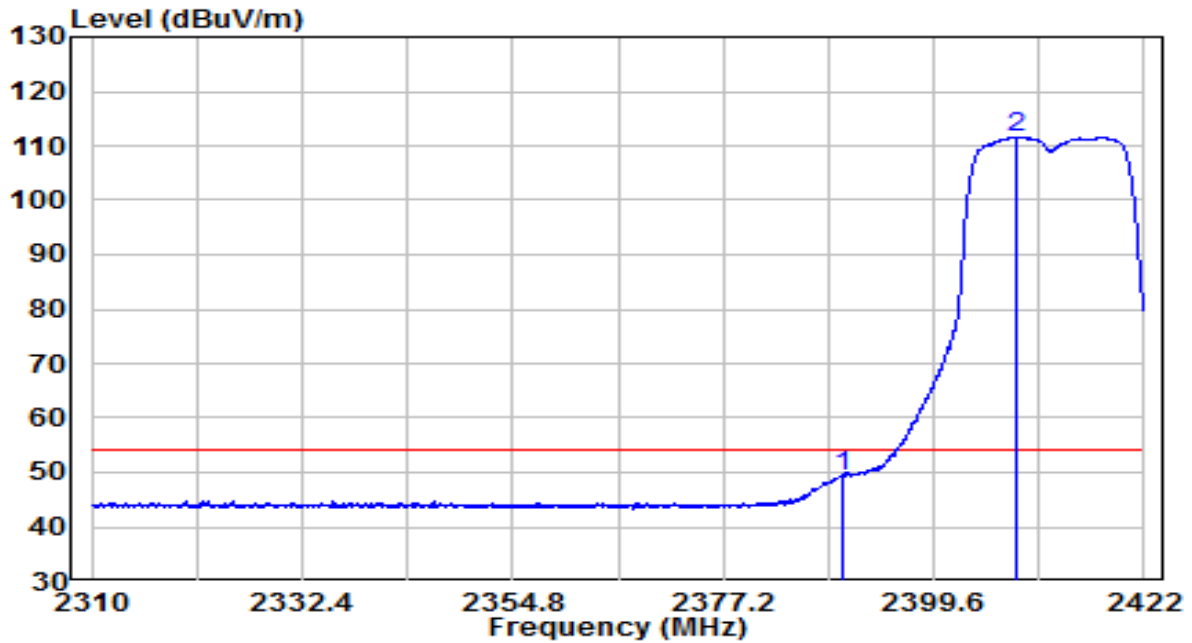


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	17.13	32.22	49.35	-4.65	54.00	Average
2	* 2408.392	79.24	32.30	111.54	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2412MHz	Test Voltage	By PoE

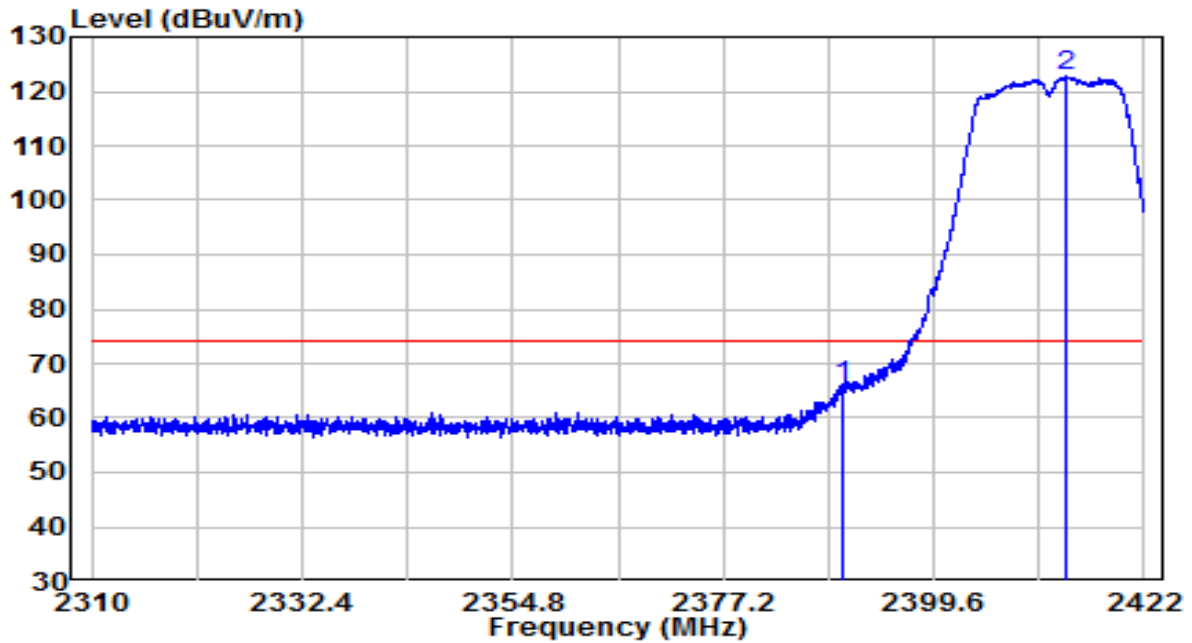


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	33.60	32.22	65.82	-8.18	74.00	Peak
2	* 2413.712	90.35	32.32	122.67	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2412MHz	Test Voltage	By PoE

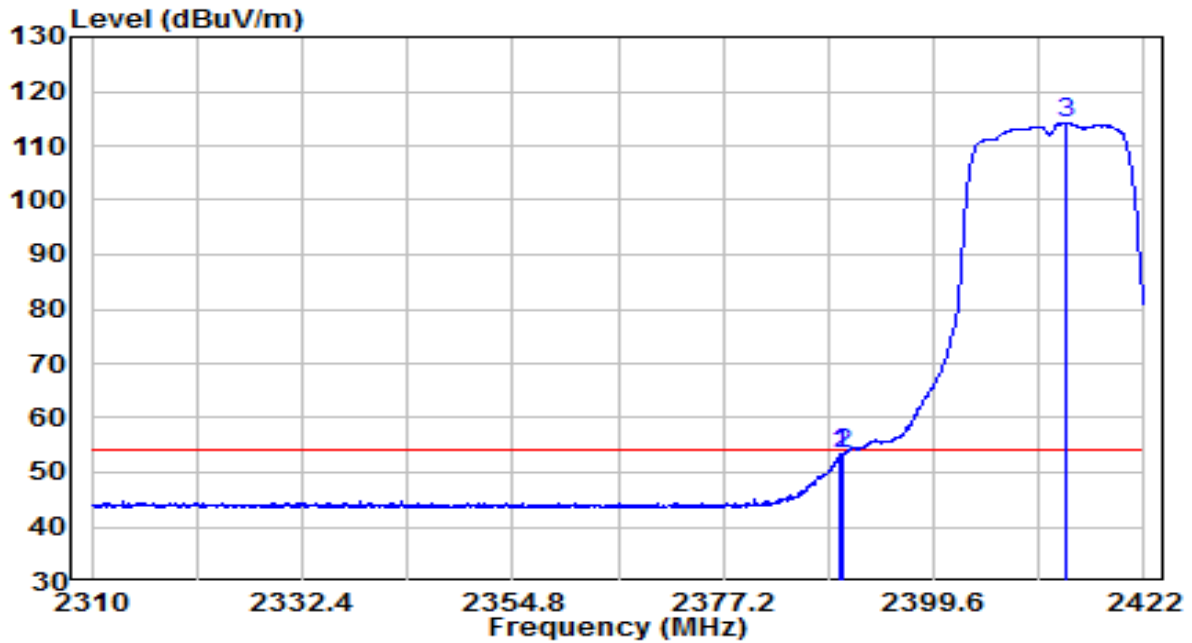


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.688	21.12	32.22	53.34	-0.66	54.00	Average
2	2390.000	21.24	32.22	53.46	-0.54	54.00	Average
3	* 2413.768	82.01	32.32	114.33	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2412MHz	Test Voltage	By PoE

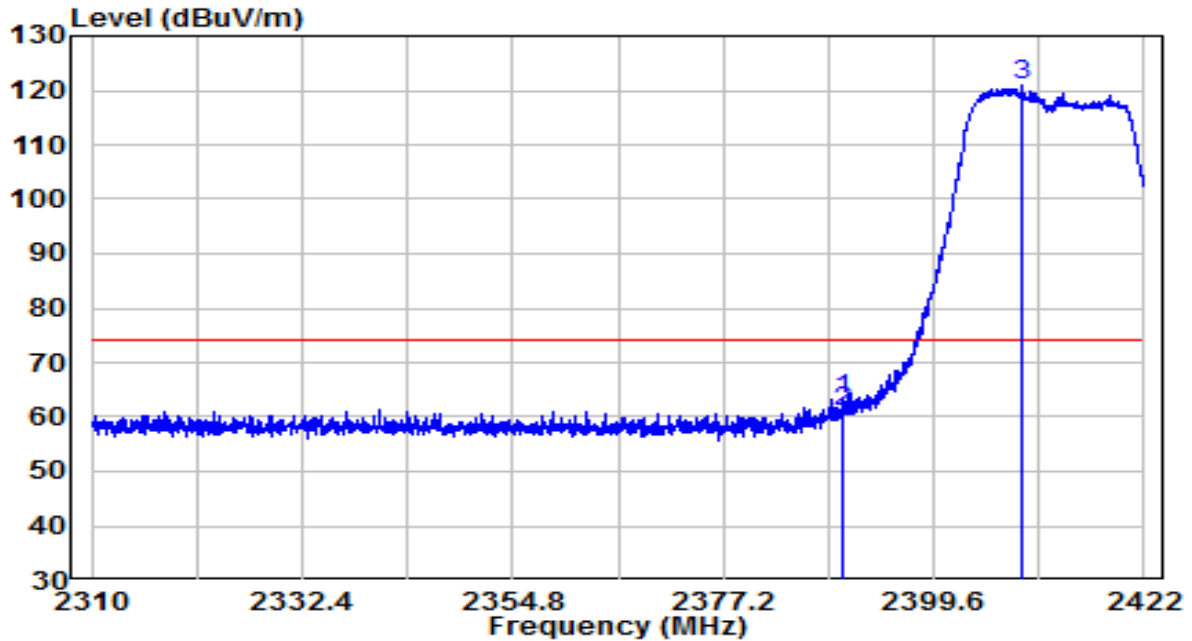


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.912	31.16	32.22	63.38	-10.62	74.00	Peak
2	2390.000	28.62	32.22	60.84	-13.16	74.00	Peak
3	* 2408.896	88.48	32.30	120.78	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2412MHz	Test Voltage	By PoE

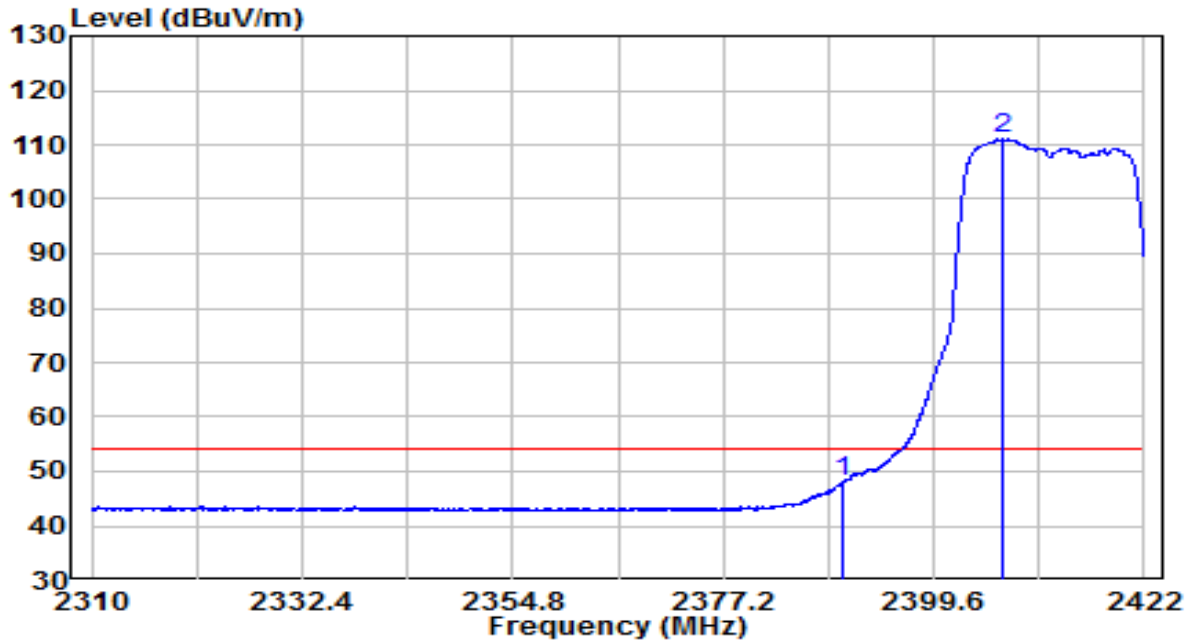


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	15.96	32.22	48.18	-5.82	54.00	Average
2	* 2406.936	78.73	32.29	111.02	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2412MHz	Test Voltage	By PoE

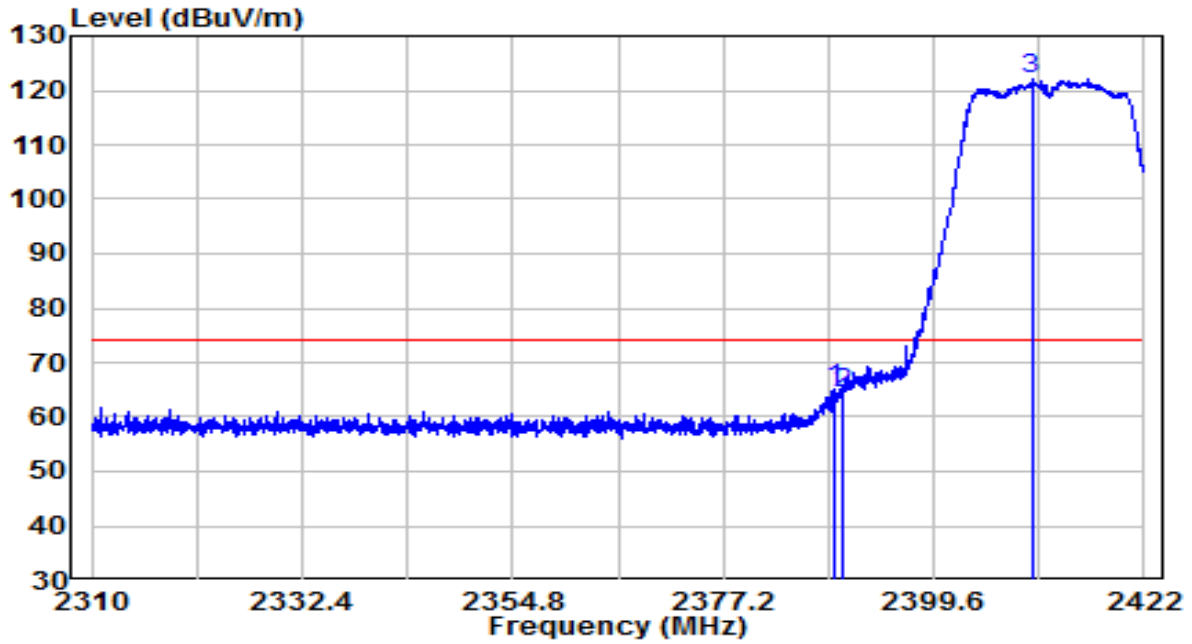


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2388.904	32.71	32.21	64.92	-9.08	74.00	Peak
2	2390.000	32.19	32.22	64.41	-9.59	74.00	Peak
3	* 2410.016	89.76	32.30	122.06	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2412MHz	Test Voltage	By PoE

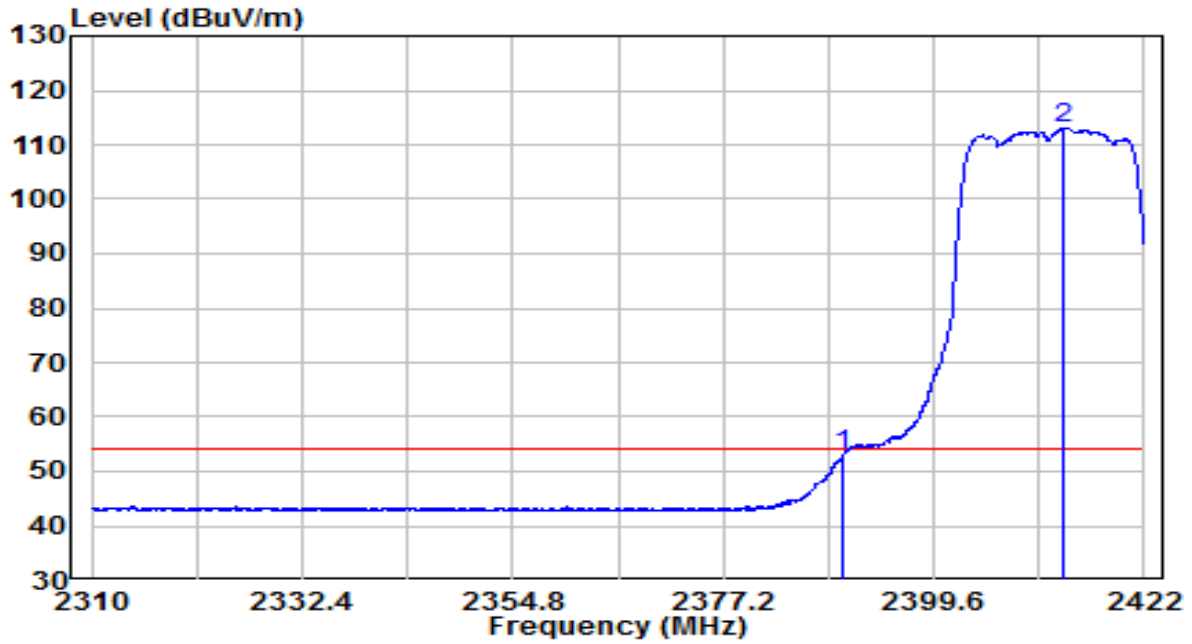


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	20.96	32.22	53.18	-0.82	54.00	Average
2	* 2413.488	80.84	32.32	113.16	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2422MHz	Test Voltage	By PoE

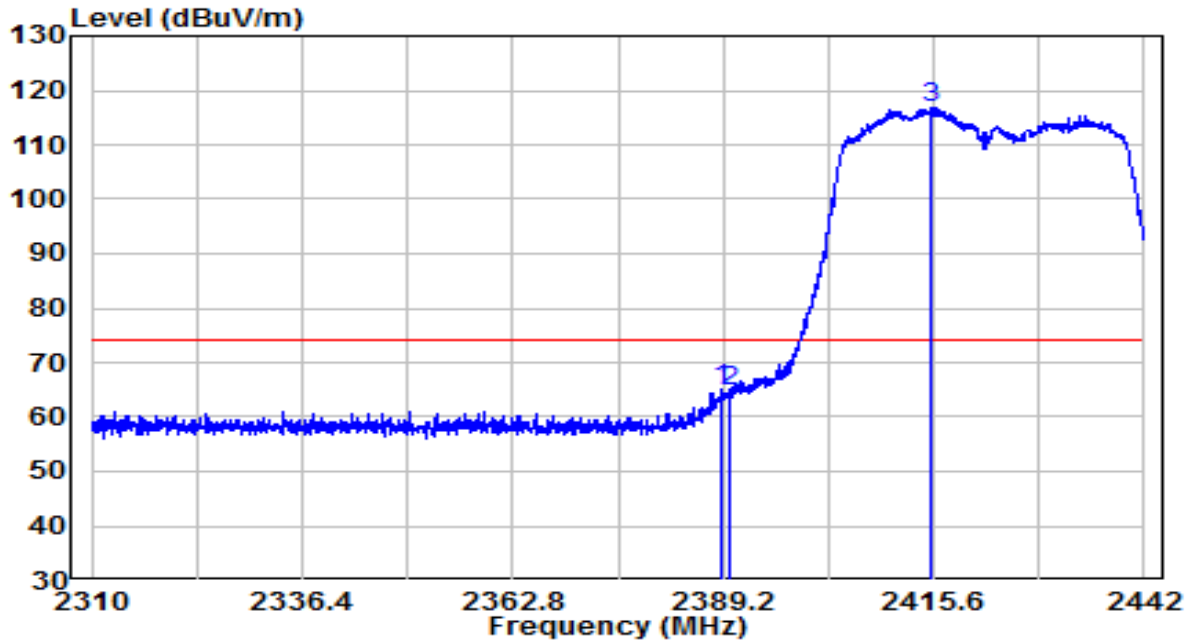


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2389.134	32.82	32.21	65.03	-8.97	74.00	Peak
2	2390.000	32.61	32.22	64.83	-9.17	74.00	Peak
3	* 2415.204	84.64	32.32	116.96	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2422MHz	Test Voltage	By PoE

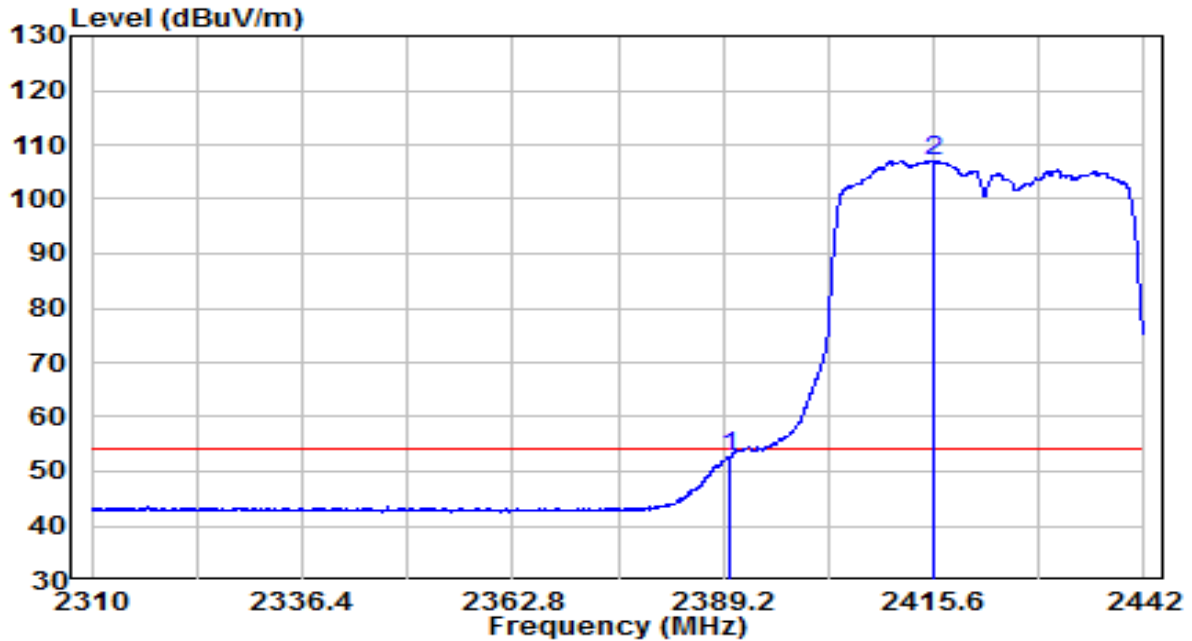


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	20.41	32.22	52.63	-1.37	54.00	Average
2	* 2415.732	74.70	32.33	107.02	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2422MHz	Test Voltage	By PoE

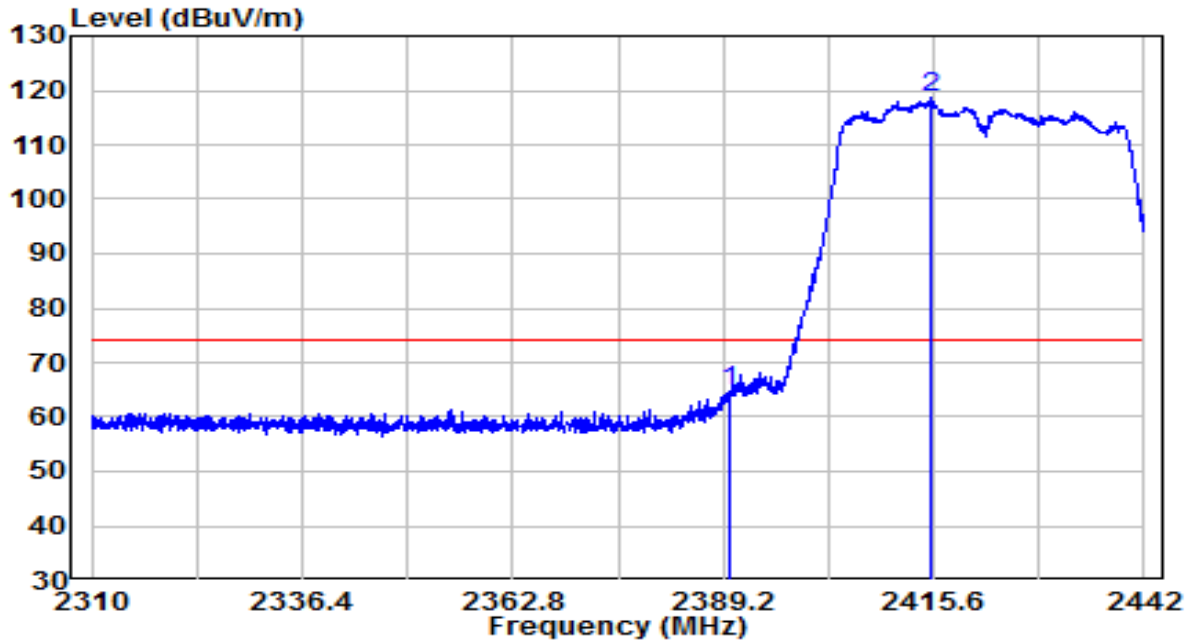


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	32.57	32.22	64.79	-9.21	74.00	Peak
2	* 2415.204	86.24	32.32	118.57	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2422MHz	Test Voltage	By PoE

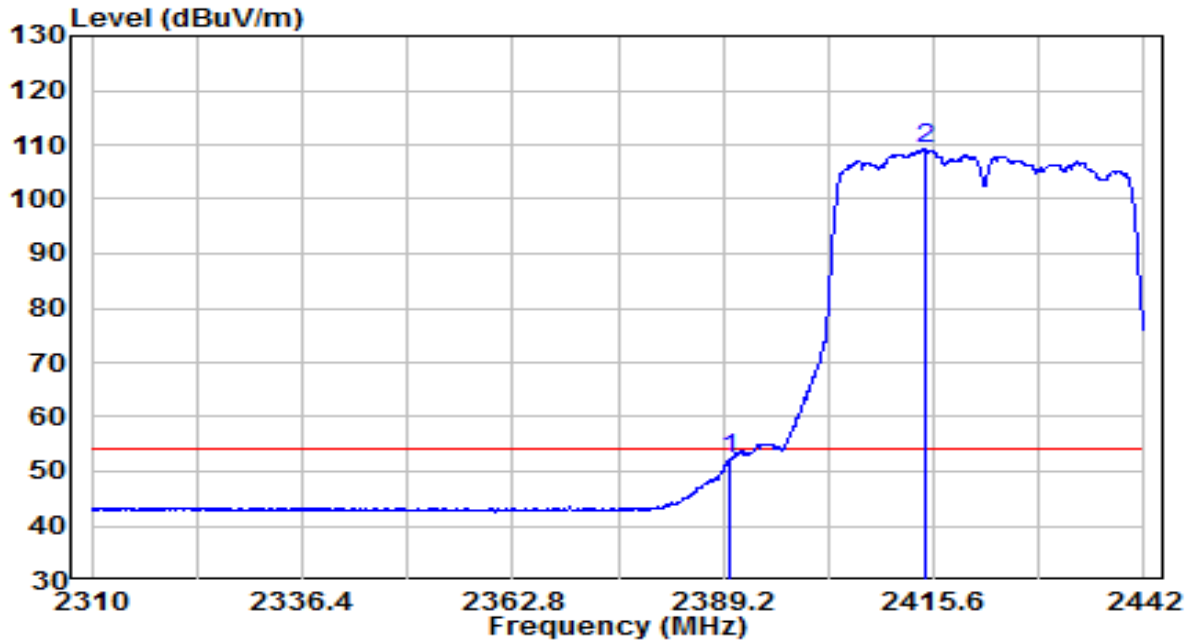


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	20.03	32.22	52.25	-1.75	54.00	Average
2	* 2414.412	76.77	32.32	109.09	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz	Test Voltage	By PoE

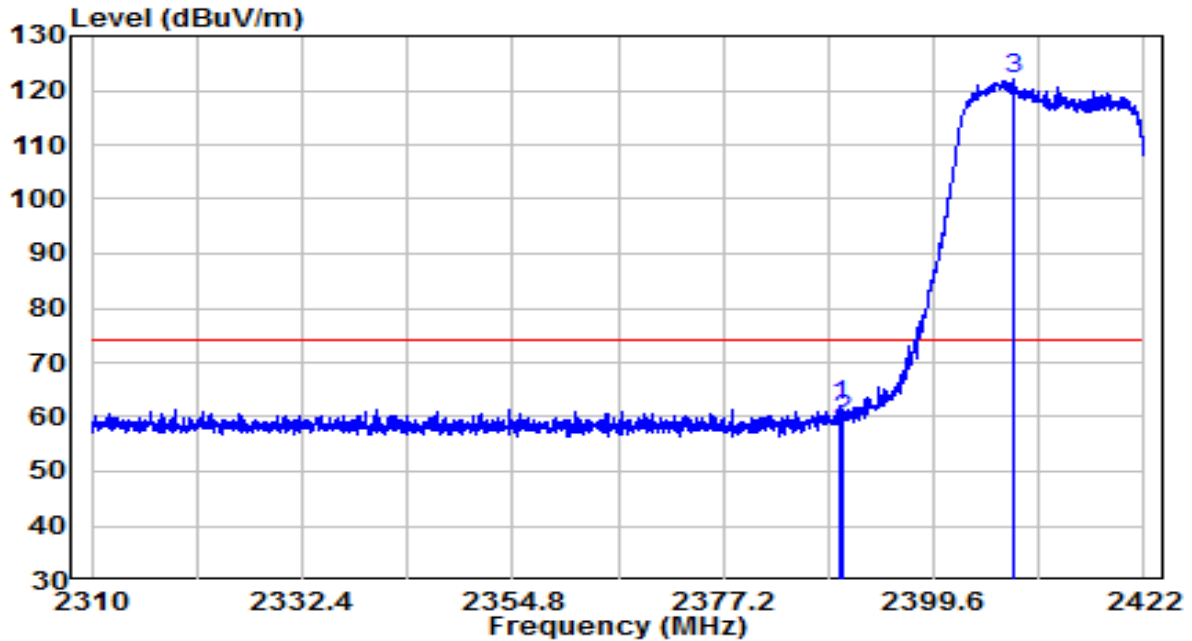


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.632	29.72	32.22	61.93	-12.07	74.00	Peak
2	2390.000	27.12	32.22	59.34	-14.66	74.00	Peak
3	* 2408.168	89.83	32.29	122.13	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz	Test Voltage	By PoE

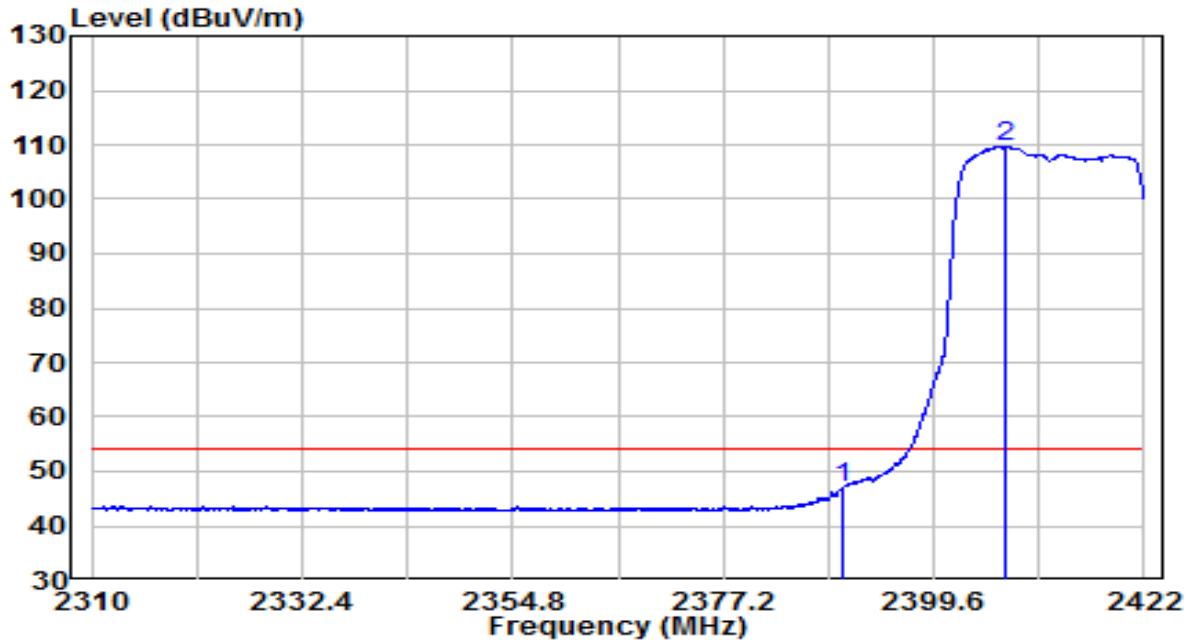


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	14.79	32.22	47.01	-6.99	54.00	Average
2	* 2407.216	77.45	32.29	109.74	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz	Test Voltage	By PoE

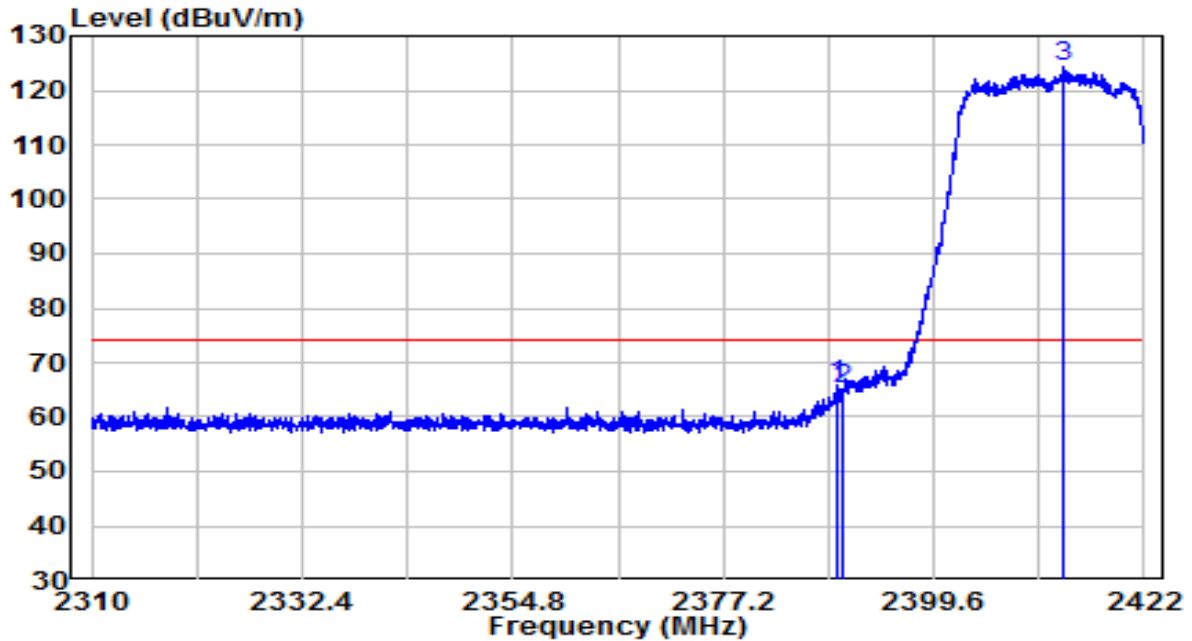


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.408	33.46	32.22	65.68	-8.32	74.00	Peak
2	2390.000	33.02	32.22	65.24	-8.76	74.00	Peak
3	* 2413.488	92.11	32.32	124.43	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz	Test Voltage	By PoE

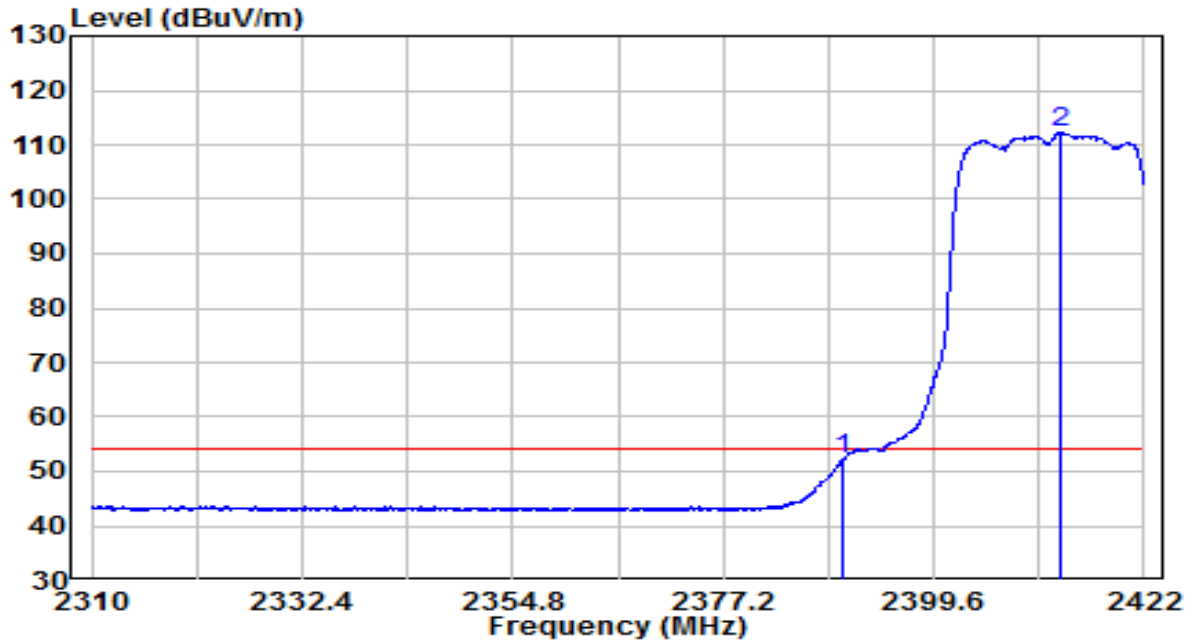


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	20.05	32.22	52.27	-1.73	54.00	Average
2	* 2413.208	79.91	32.32	112.23	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	By PoE

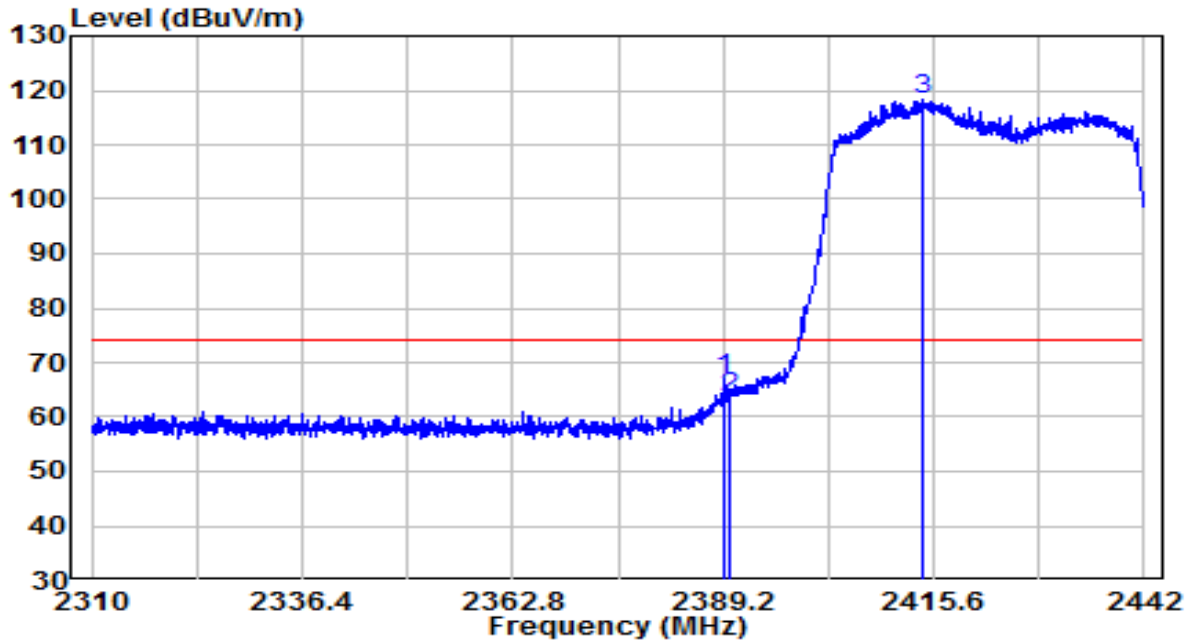


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.398	34.88	32.22	67.09	-6.91	74.00	Peak
2	2390.000	31.27	32.22	63.49	-10.51	74.00	Peak
3	* 2414.214	85.99	32.32	118.31	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	By PoE

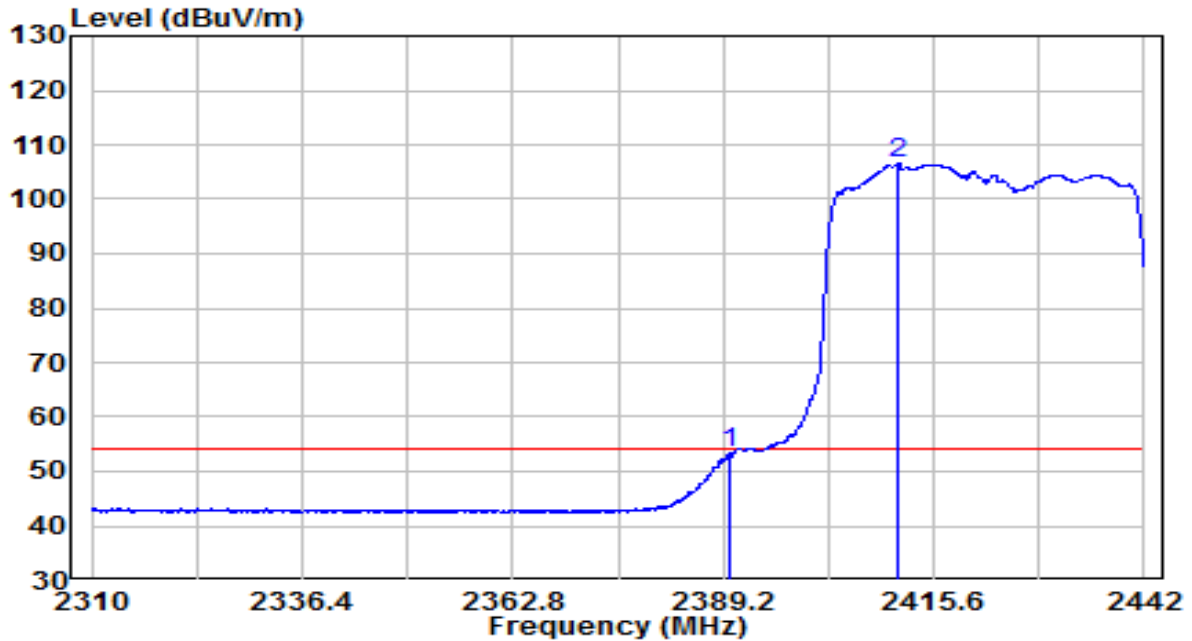


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	21.14	32.22	53.36	-0.64	54.00	Average
2	* 2411.112	74.18	32.31	106.49	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	By PoE

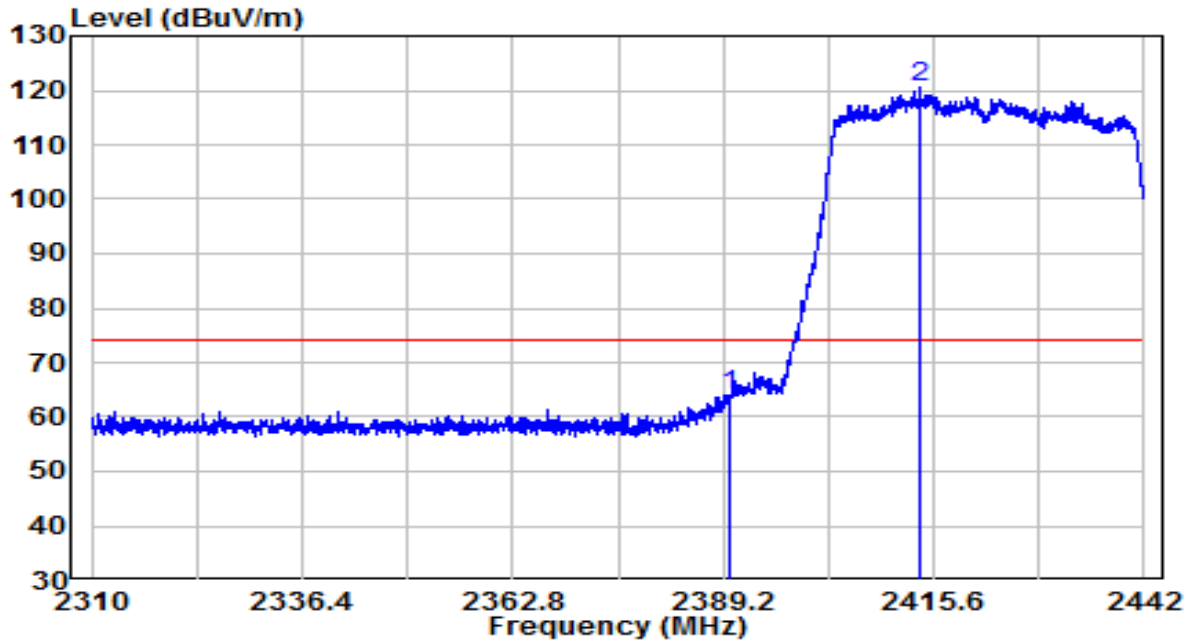


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	31.89	32.22	64.11	-9.89	74.00	Peak
2	* 2413.884	88.21	32.32	120.53	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	By PoE

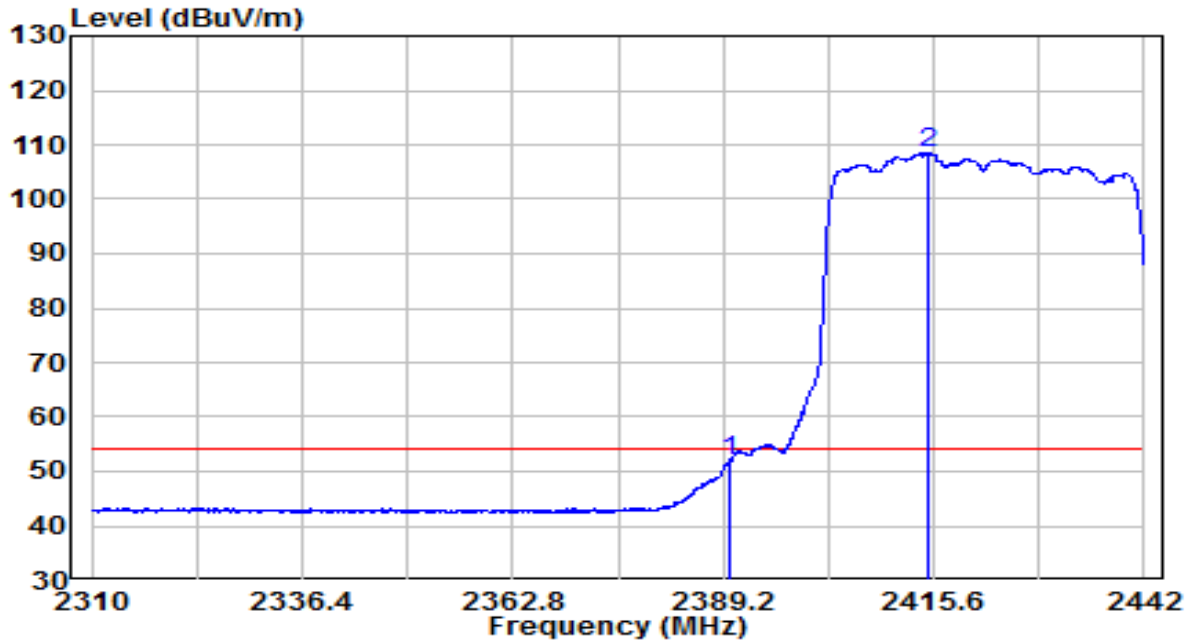


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	19.76	32.22	51.98	-2.02	54.00	Average
2	* 2414.808	76.11	32.32	108.43	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

**APEX0585 Filter 3#**

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2462MHz	Test Voltage	By PoE

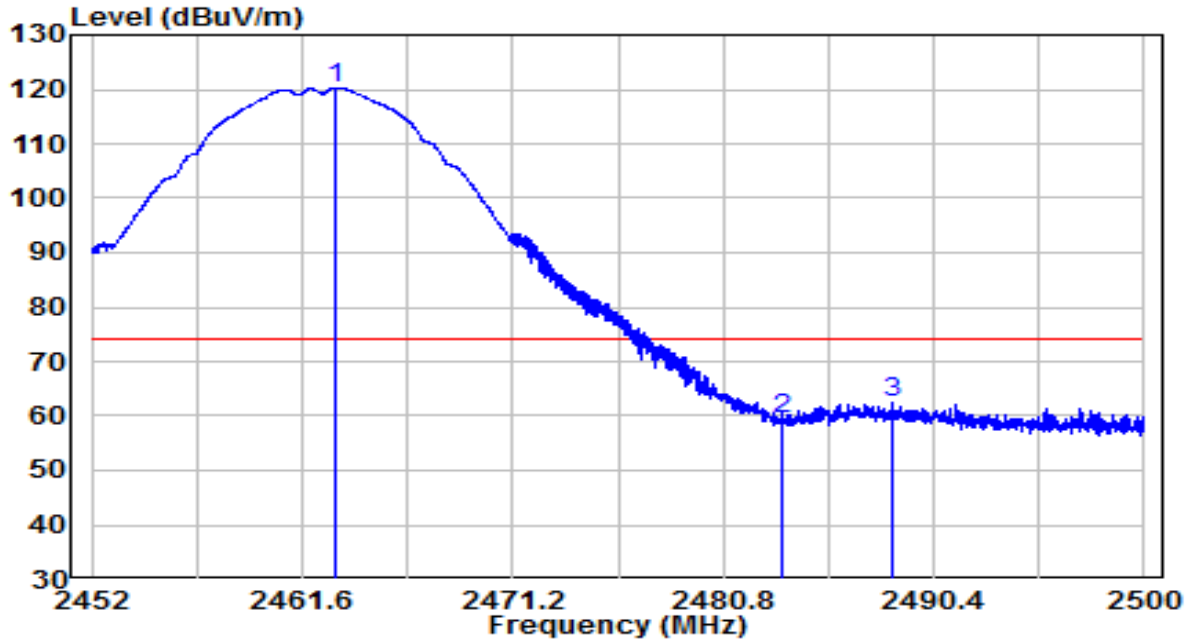


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	*	87.79	32.53	120.32	N/A	N/A	Peak
2		26.81	32.61	59.42	-14.58	74.00	Peak
3		29.99	32.63	62.62	-11.38	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2462MHz	Test Voltage	By PoE

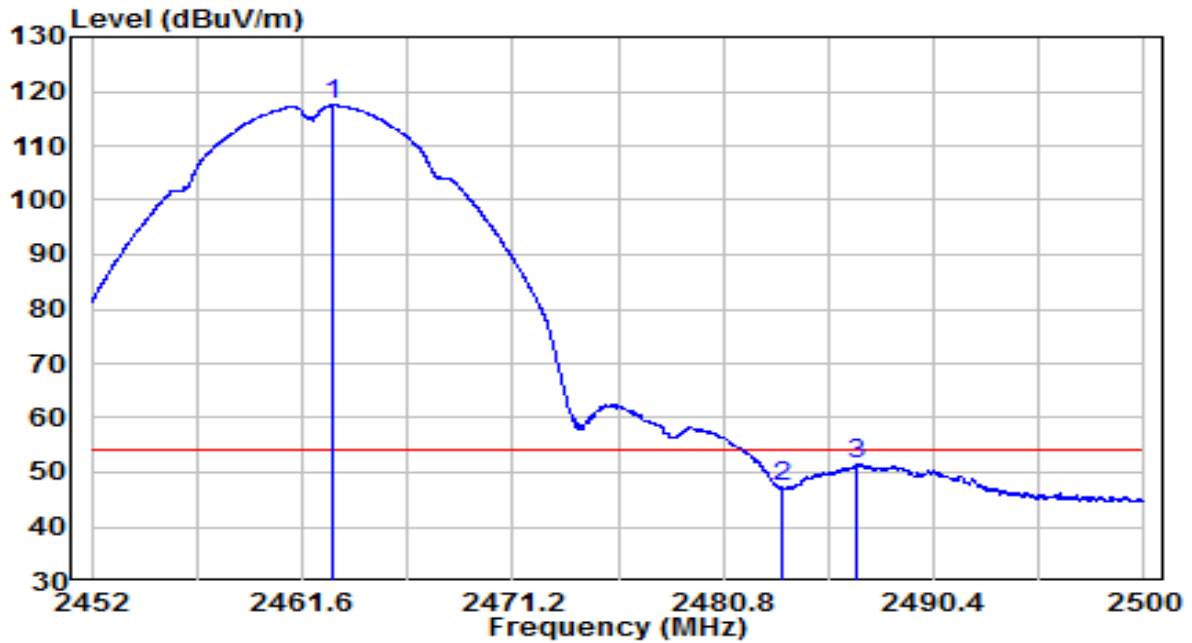


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	84.88	32.52	117.41	N/A	N/A	Average
2		14.63	32.61	47.24	-6.76	54.00	Average
3		18.87	32.62	51.49	-2.51	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2462MHz	Test Voltage	By PoE

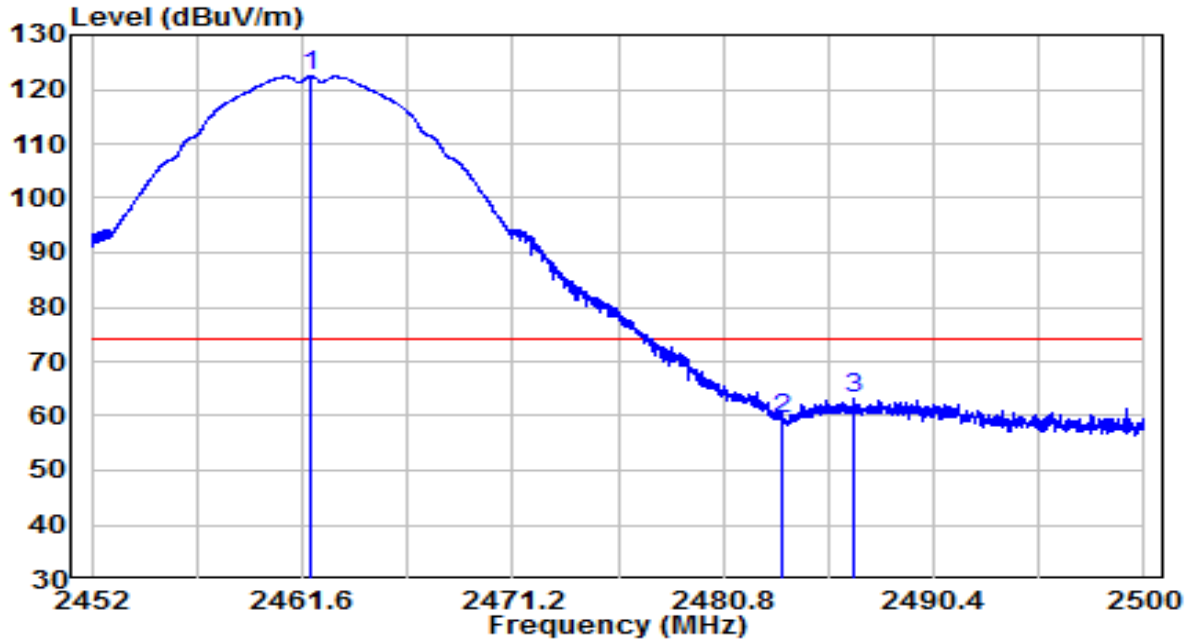


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2461.960	89.90	32.52	122.42	N/A	N/A	Peak
2	2483.500	26.65	32.61	59.26	-14.74	74.00	Peak
3	2486.752	30.42	32.62	63.04	-10.96	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2462MHz	Test Voltage	By PoE

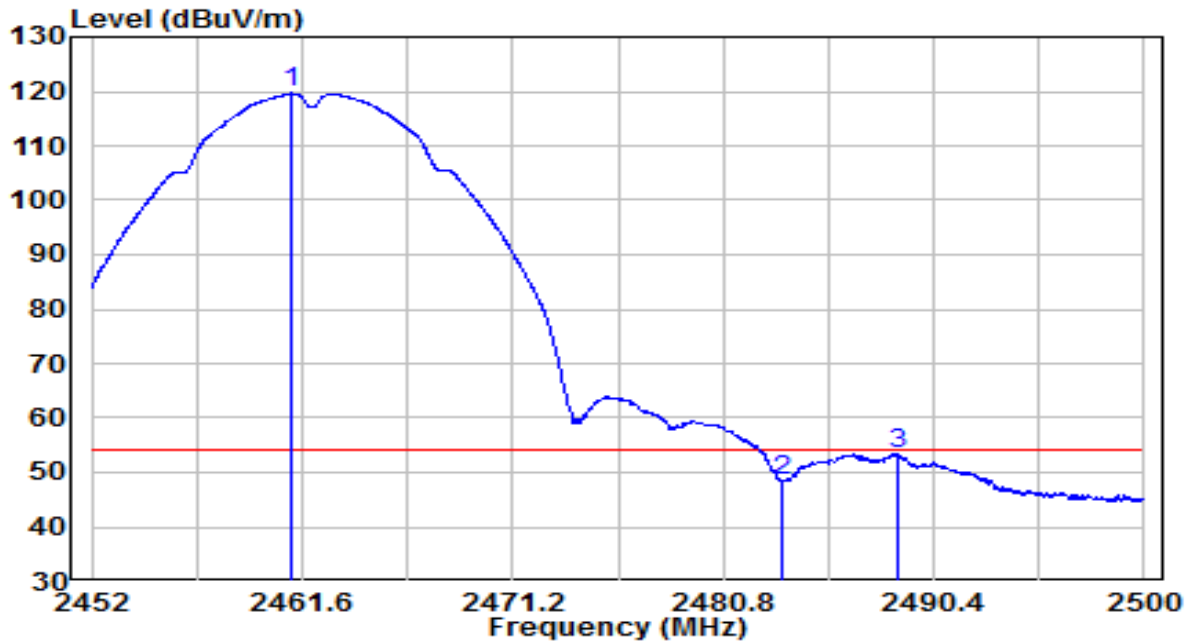


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2461.048	87.11	32.52	119.63	N/A	N/A	Average
2		2483.500	15.75	32.61	48.36	-5.64	54.00	Average
3		2488.744	20.68	32.63	53.31	-0.69	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2462MHz	Test Voltage	By PoE

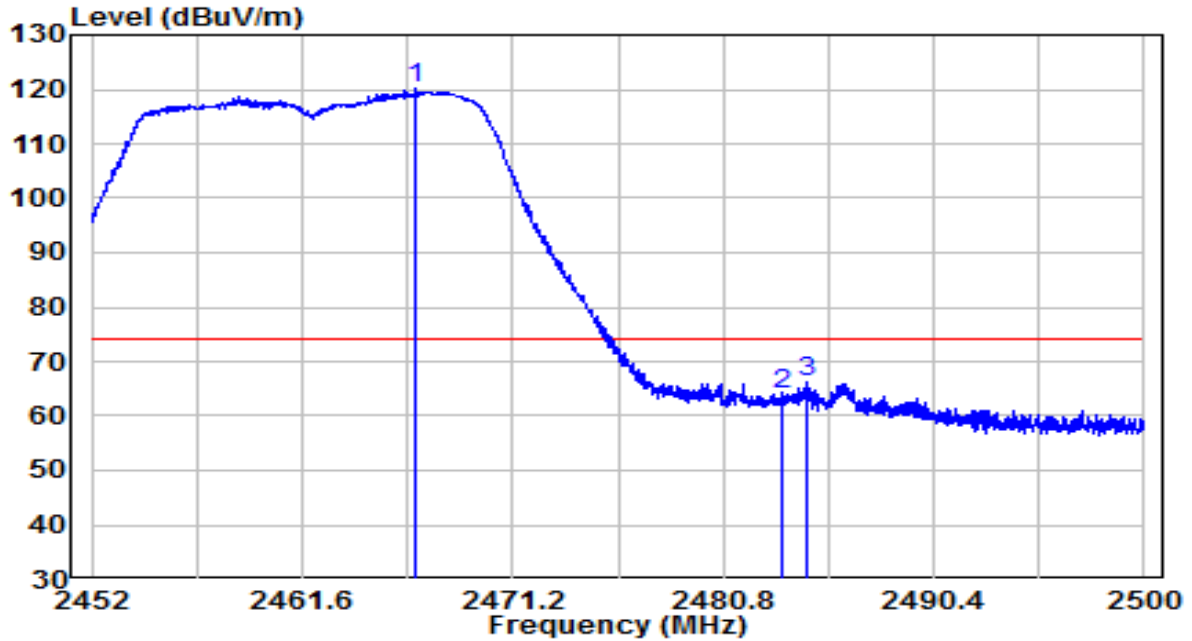


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2466.784	87.54	32.54	120.08	N/A	N/A	Peak
2		2483.500	31.25	32.61	63.86	-10.14	74.00	Peak
3		2484.616	33.56	32.62	66.17	-7.83	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2462MHz	Test Voltage	By PoE

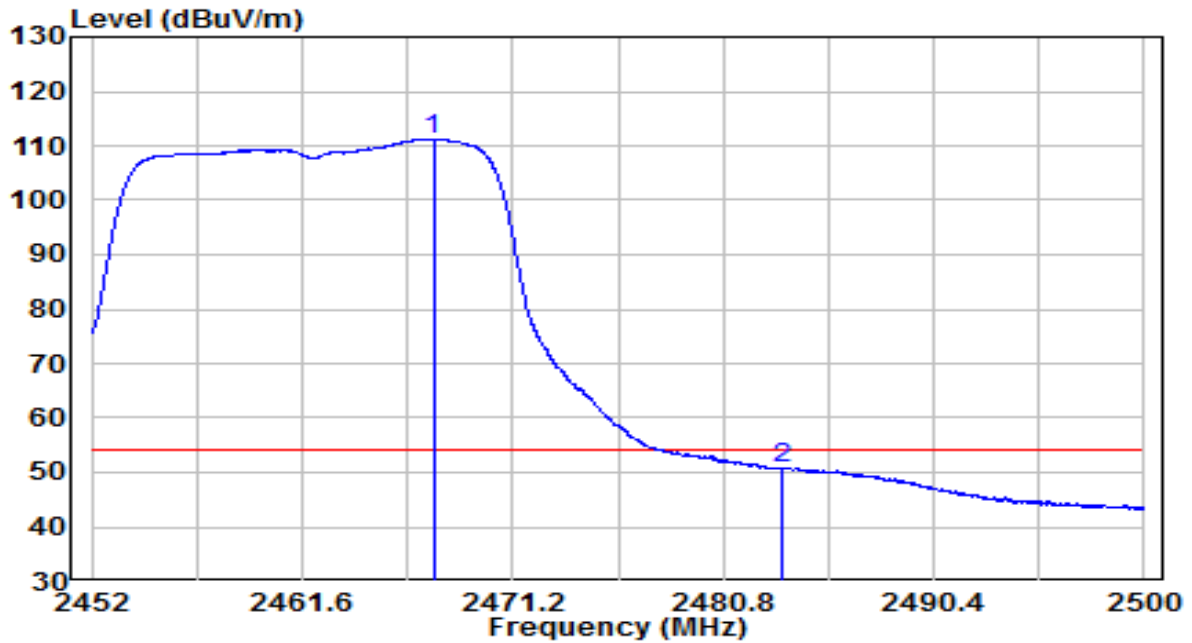


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2467.576	78.56	32.54	111.11	N/A	N/A	Average
2	2483.500	18.13	32.61	50.74	-3.26	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2462MHz	Test Voltage	By PoE

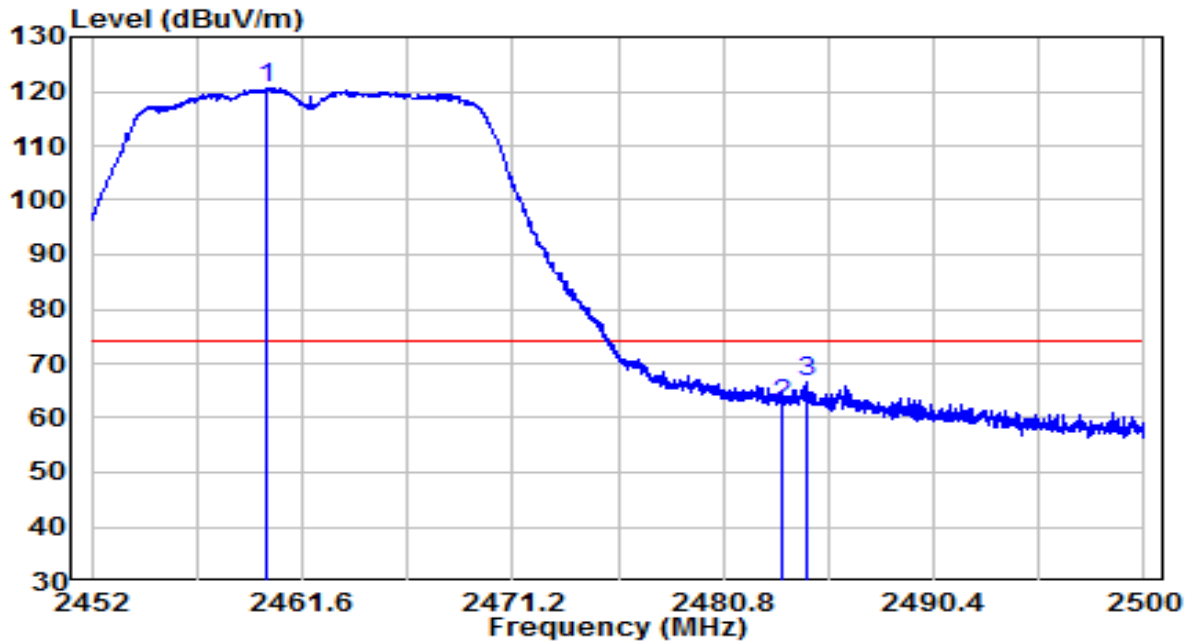


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2459.968	88.01	32.51	120.52	N/A	N/A	Peak
2	2483.500	29.83	32.61	62.44	-11.56	74.00	Peak
3	2484.568	33.93	32.62	66.54	-7.46	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2462MHz	Test Voltage	By PoE

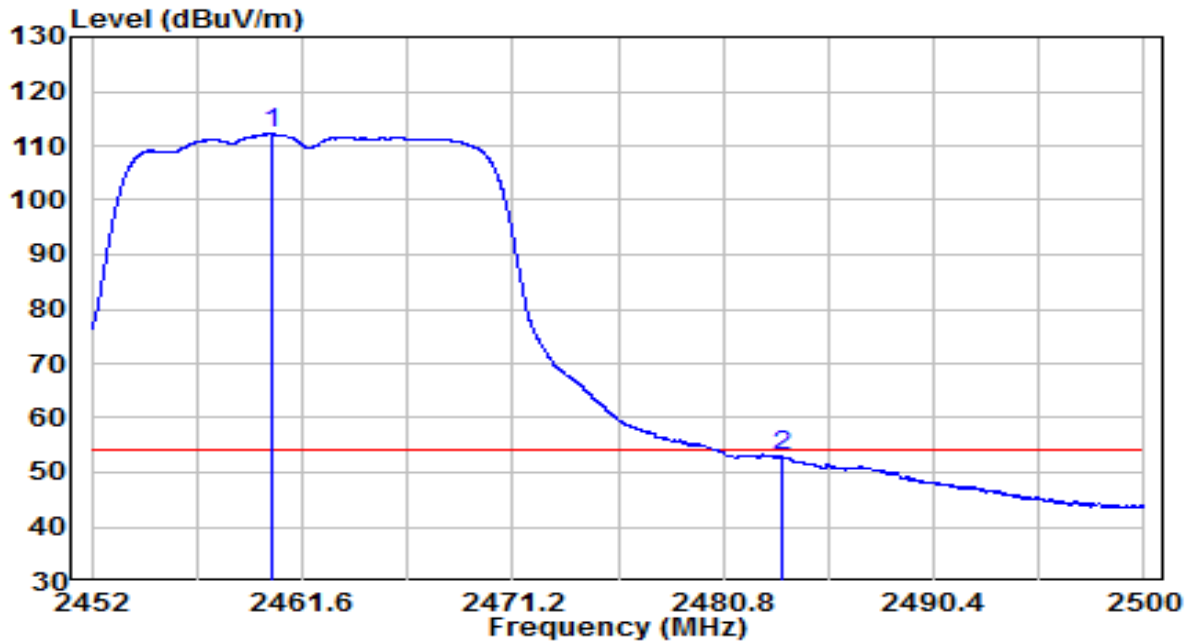


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2460.208	79.68	32.51	112.19	N/A	N/A	Average
2	2483.500	20.23	32.61	52.84	-1.16	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2462MHz	Test Voltage	By PoE

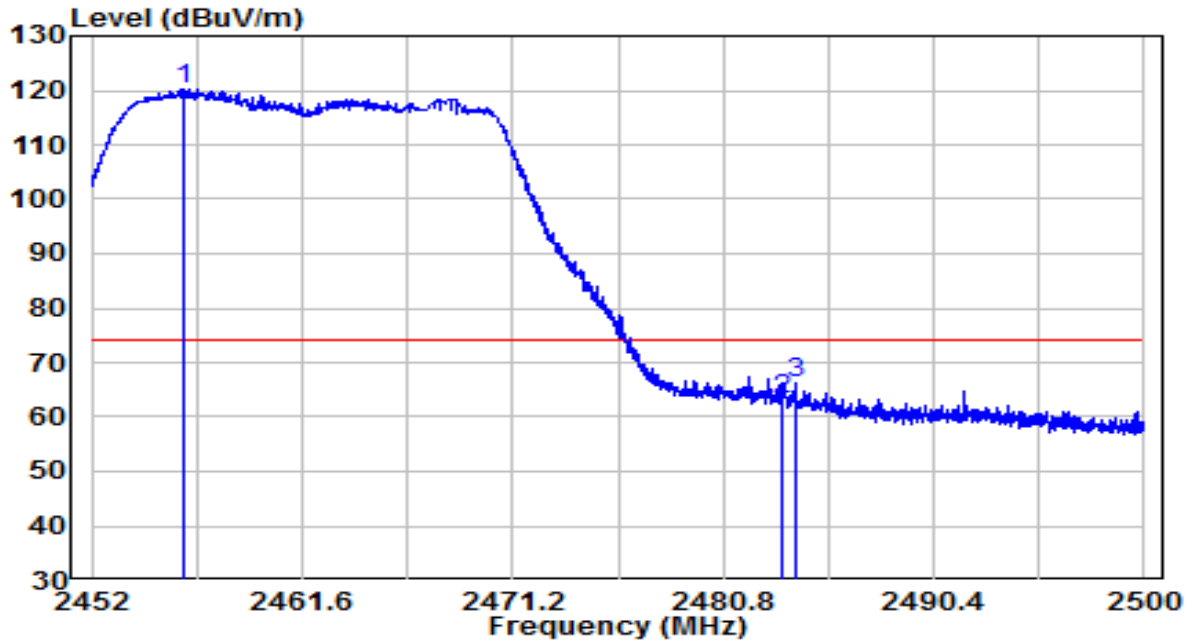


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2456.200	87.84	32.50	120.34	N/A	N/A	Peak
2	2483.500	30.63	32.61	63.24	-10.76	74.00	Peak
3	2484.088	33.76	32.61	66.38	-7.62	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2462MHz	Test Voltage	By PoE

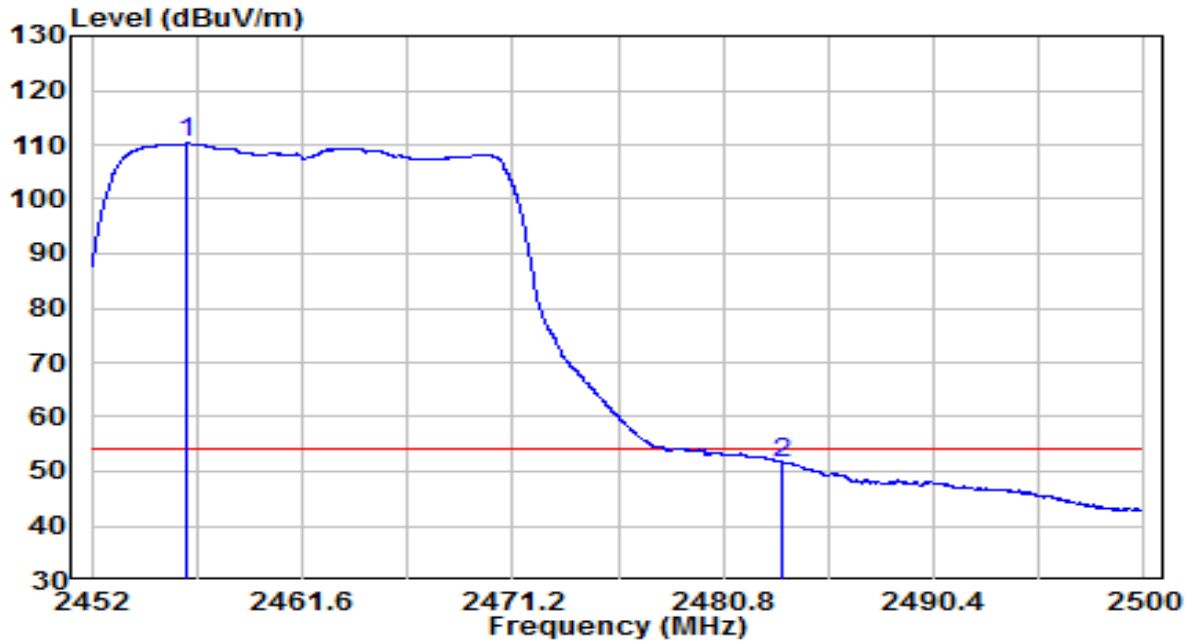


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2456.368	77.75	32.50	110.25	N/A	N/A	Average
2		2483.500	19.04	32.61	51.65	-2.35	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2462MHz	Test Voltage	By PoE

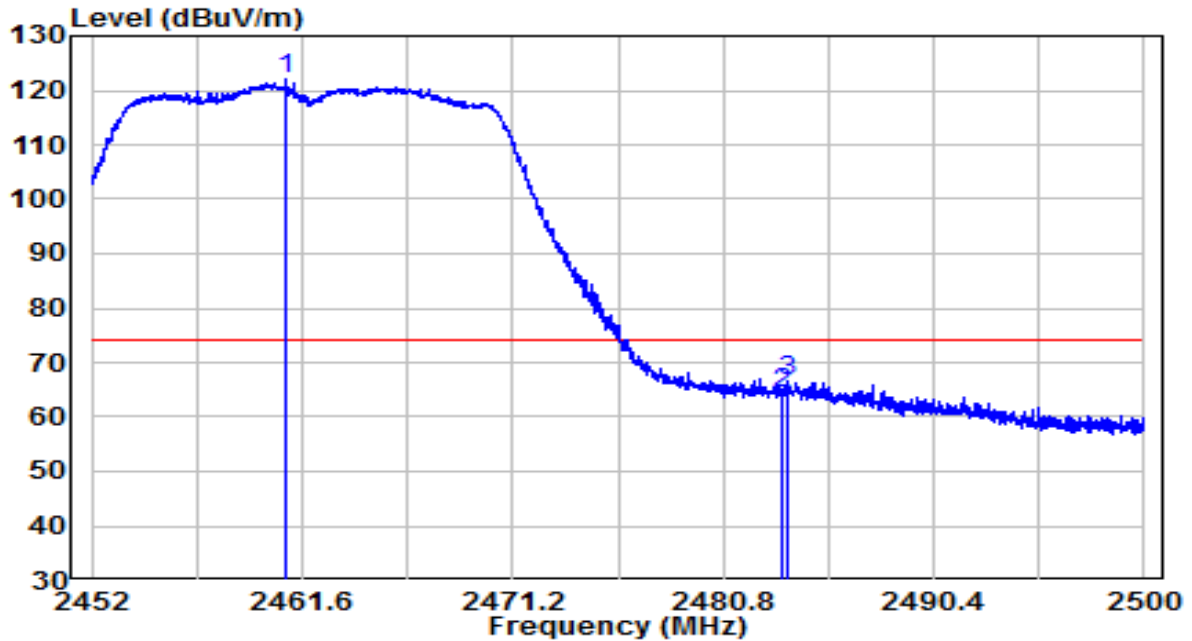


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2460.904	89.44	32.52	121.96	N/A	N/A	Peak
2	2483.500	31.83	32.61	64.44	-9.56	74.00	Peak
3	2483.680	33.90	32.61	66.51	-7.49	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2462MHz	Test Voltage	By PoE

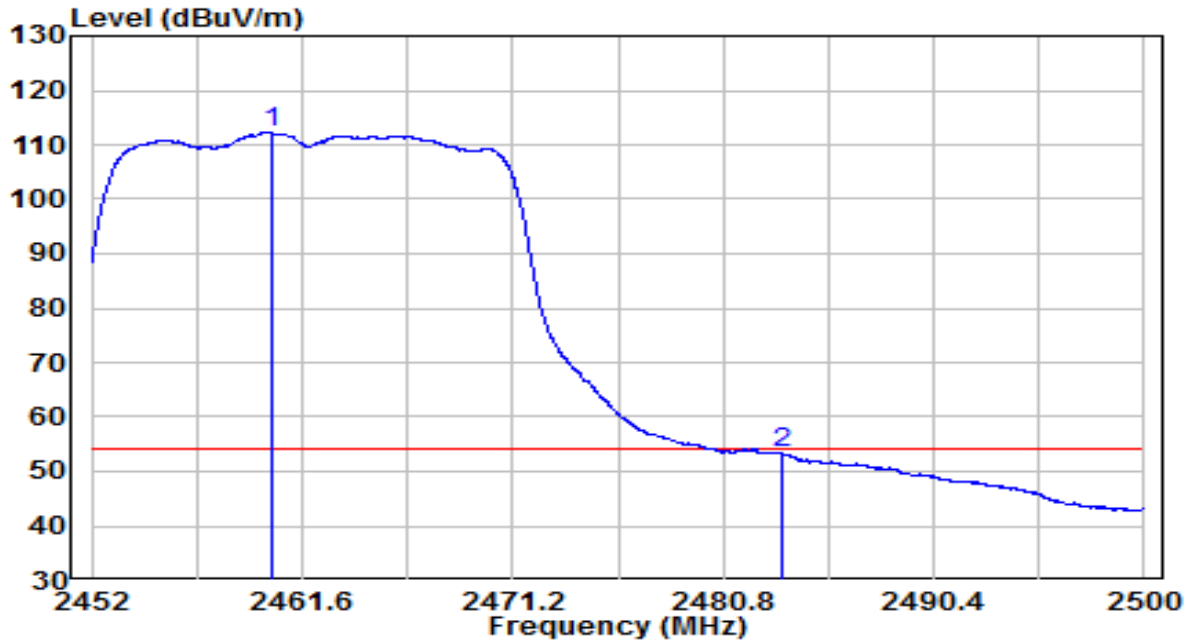


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2460.184	79.91	32.51	112.42	N/A	N/A	Average
2	2483.500	20.80	32.61	53.41	-0.59	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2452MHz	Test Voltage	By PoE

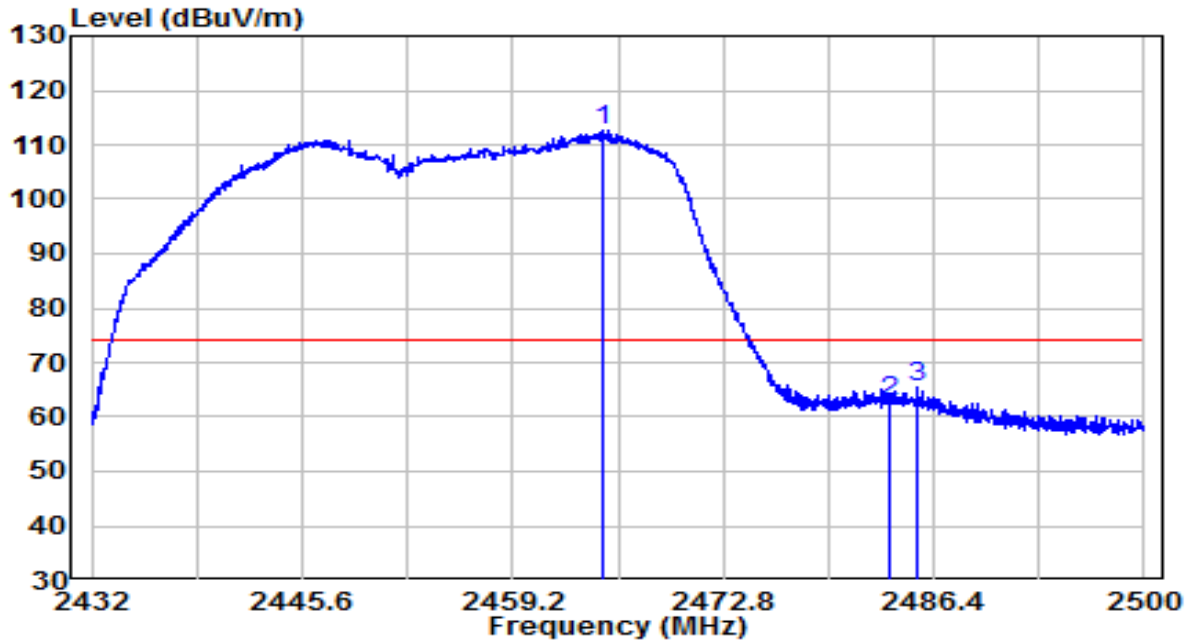


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2465.082	80.22	32.53	112.75	N/A	N/A	Peak
2		2483.500	30.10	32.61	62.71	-11.29	74.00	Peak
3		2485.380	32.89	32.62	65.51	-8.49	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2452MHz	Test Voltage	By PoE

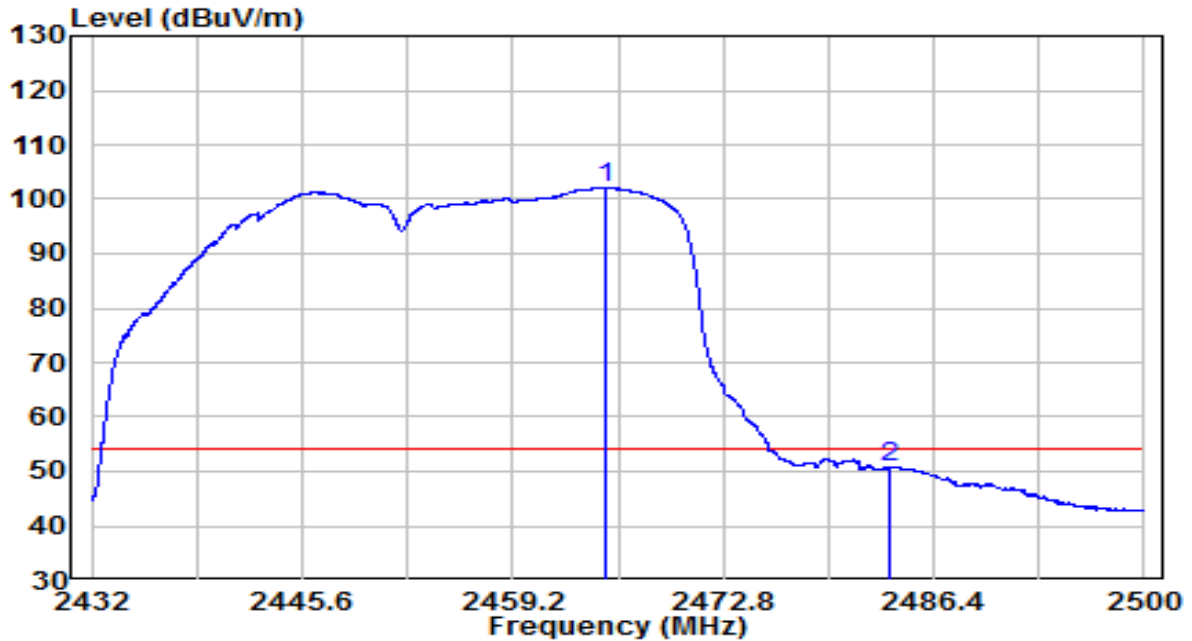


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	69.52	32.53	102.05	N/A	N/A	Average
2		18.00	32.61	50.61	-3.39	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2452MHz	Test Voltage	By PoE

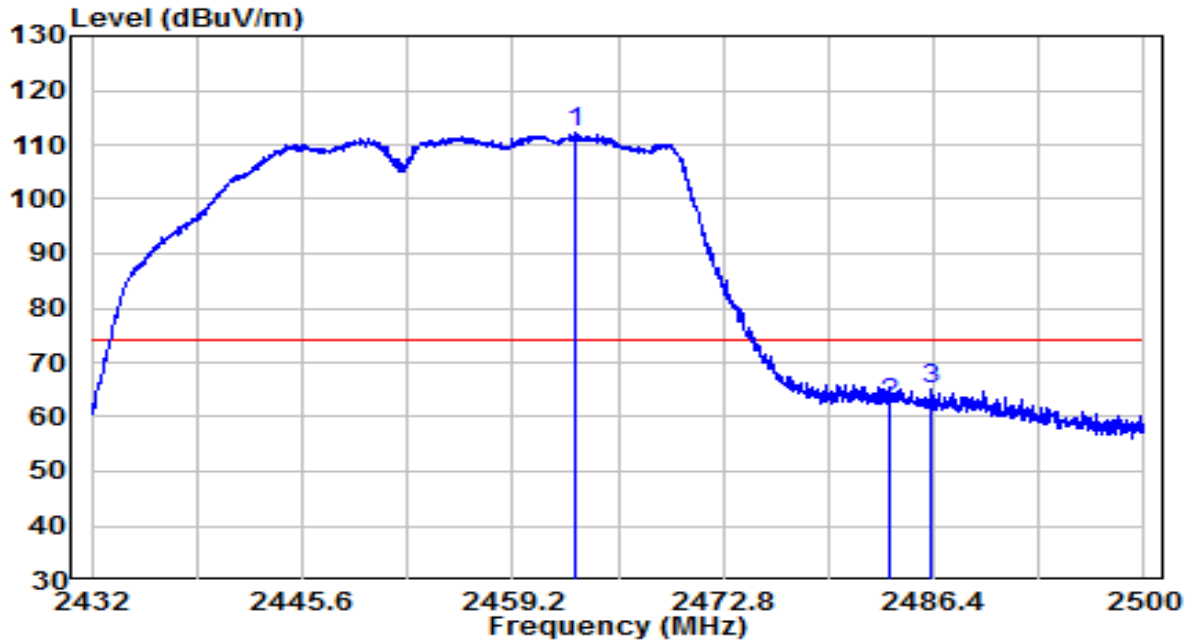


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2463.178	79.56	32.53	112.08	N/A	N/A	Peak
2	2483.500	30.01	32.61	62.63	-11.37	74.00	Peak
3	2486.196	32.59	32.62	65.21	-8.79	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2452MHz	Test Voltage	By PoE

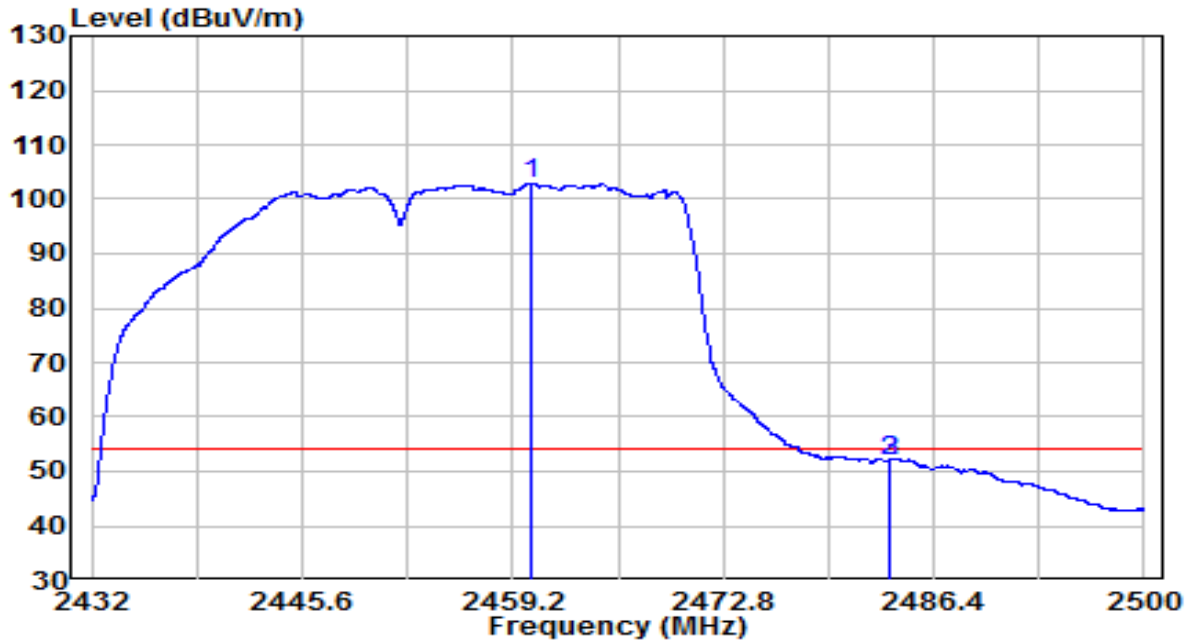


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2460.390	70.41	32.51	102.92	N/A	N/A	Average
2	2483.500	19.41	32.61	52.02	-1.98	54.00	Average
3	2483.510	19.41	32.61	52.02	-1.98	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz	Test Voltage	By PoE

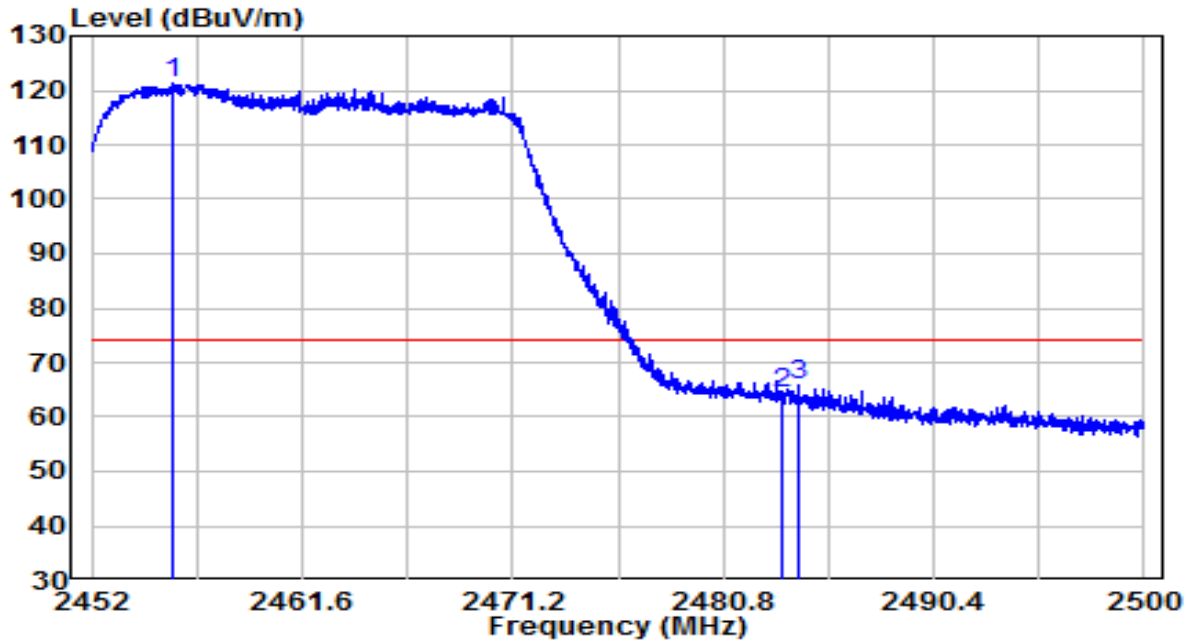


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2455.648	88.73	32.49	121.22	N/A	N/A	Peak
2		2483.500	31.67	32.61	64.28	-9.72	74.00	Peak
3		2484.208	33.05	32.61	65.66	-8.34	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz	Test Voltage	By PoE

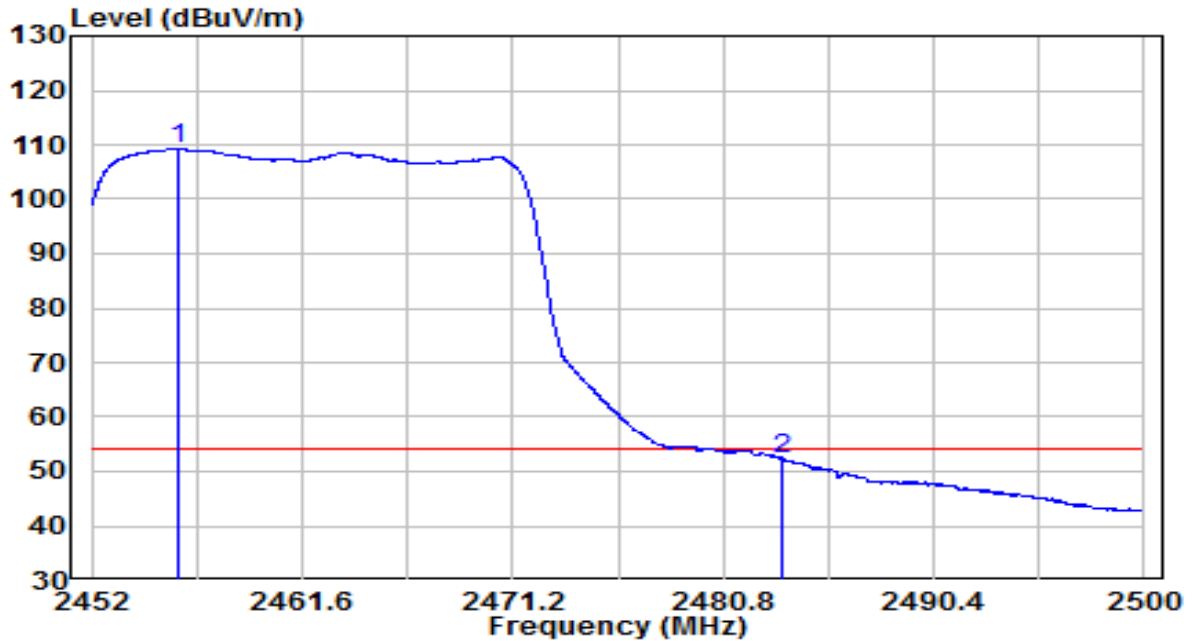


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2455.912	76.79	32.49	109.28	N/A	N/A	Average
2	2483.500	19.48	32.61	52.09	-1.91	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz	Test Voltage	By PoE

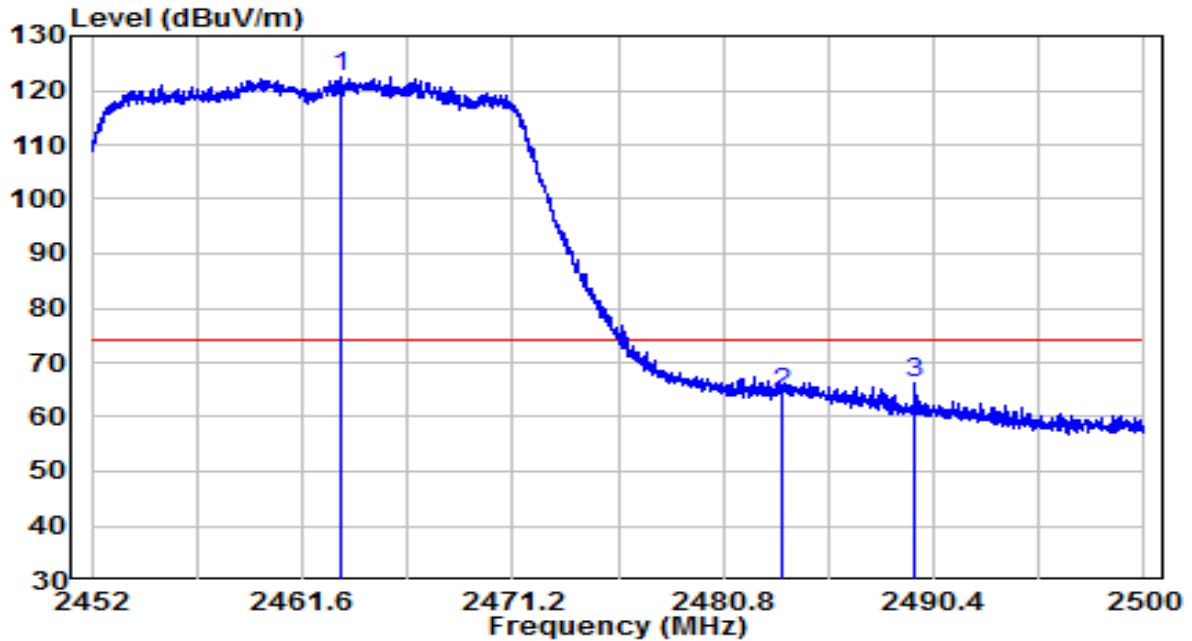


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2463.376	89.98	32.53	122.51	N/A	N/A	Peak
2		2483.500	31.86	32.61	64.47	-9.53	74.00	Peak
3		2489.560	33.67	32.64	66.31	-7.69	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz	Test Voltage	By PoE

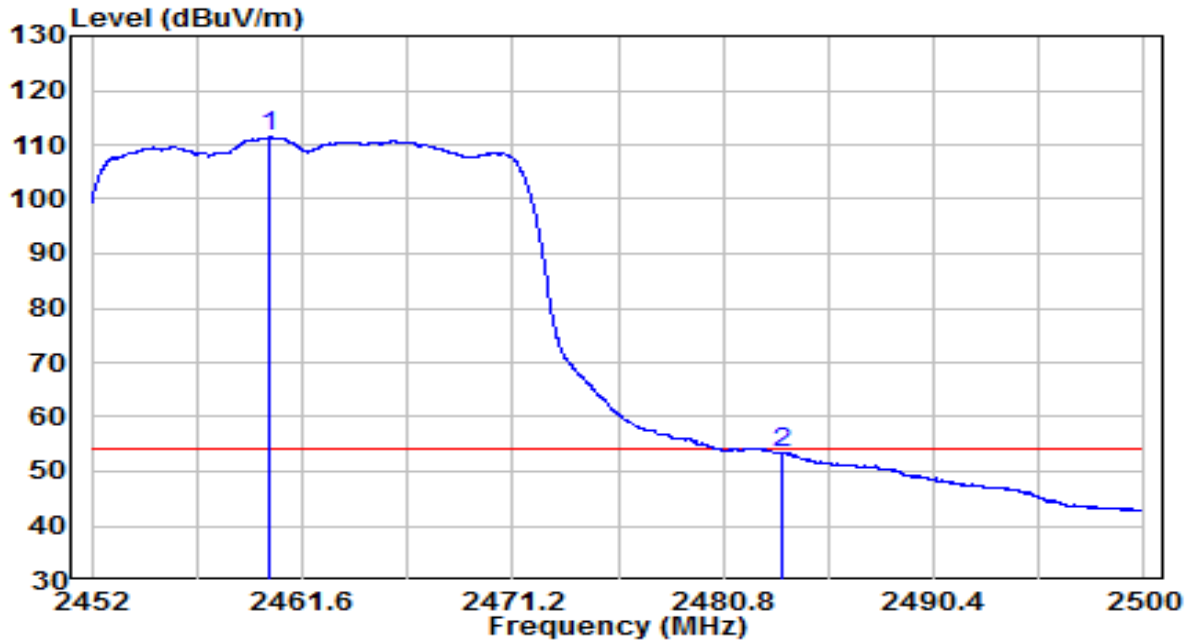


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2460.136	78.82	32.51	111.34	N/A	N/A	Average
2	2483.500	20.72	32.61	53.33	-0.67	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	By PoE

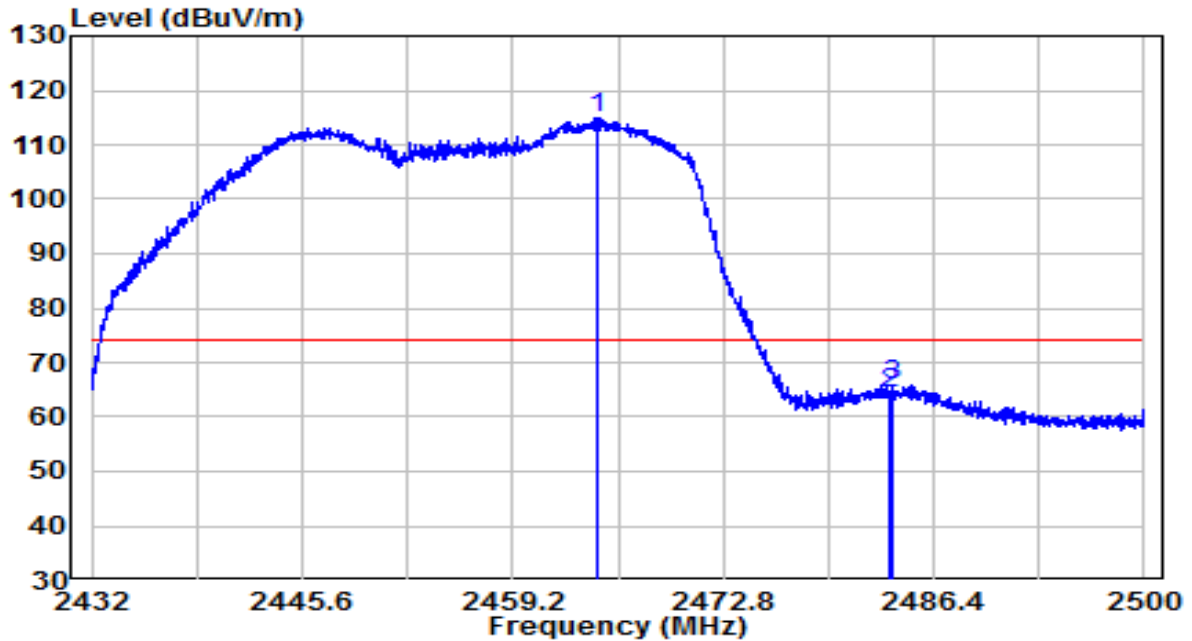


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2464.708	82.36	32.53	114.89	N/A	N/A	Peak
2		2483.500	31.72	32.61	64.33	-9.67	74.00	Peak
3		2483.646	33.33	32.61	65.94	-8.06	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	By PoE

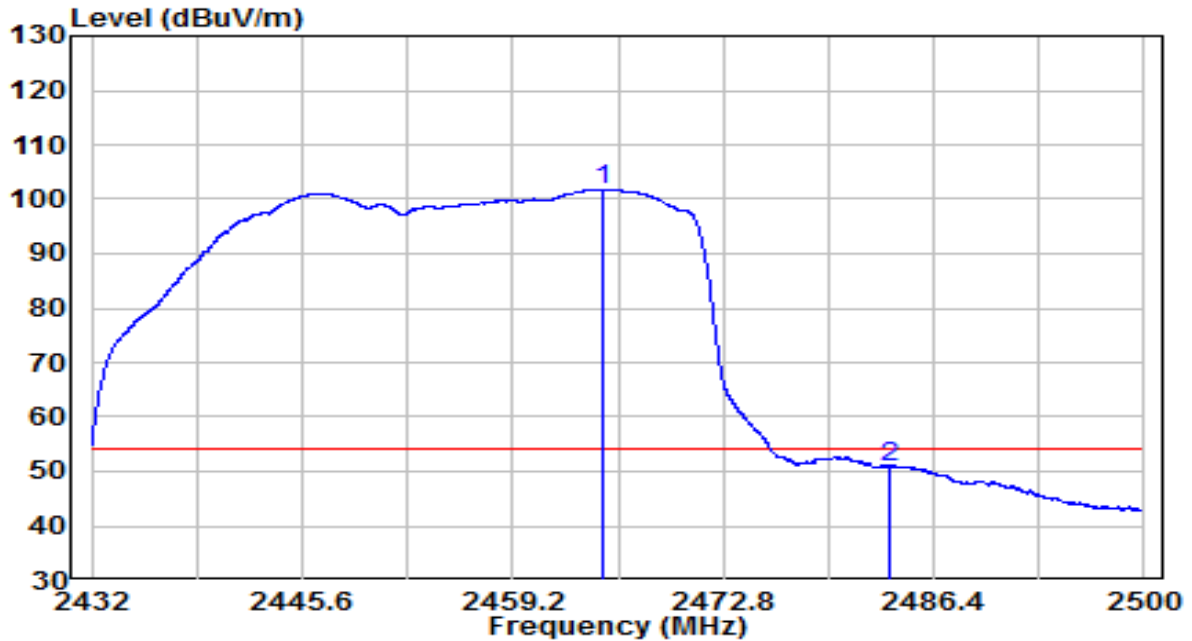


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2464.980	69.26	32.53	101.80	N/A	N/A	Average
2	2483.500	18.30	32.61	50.91	-3.09	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	By PoE

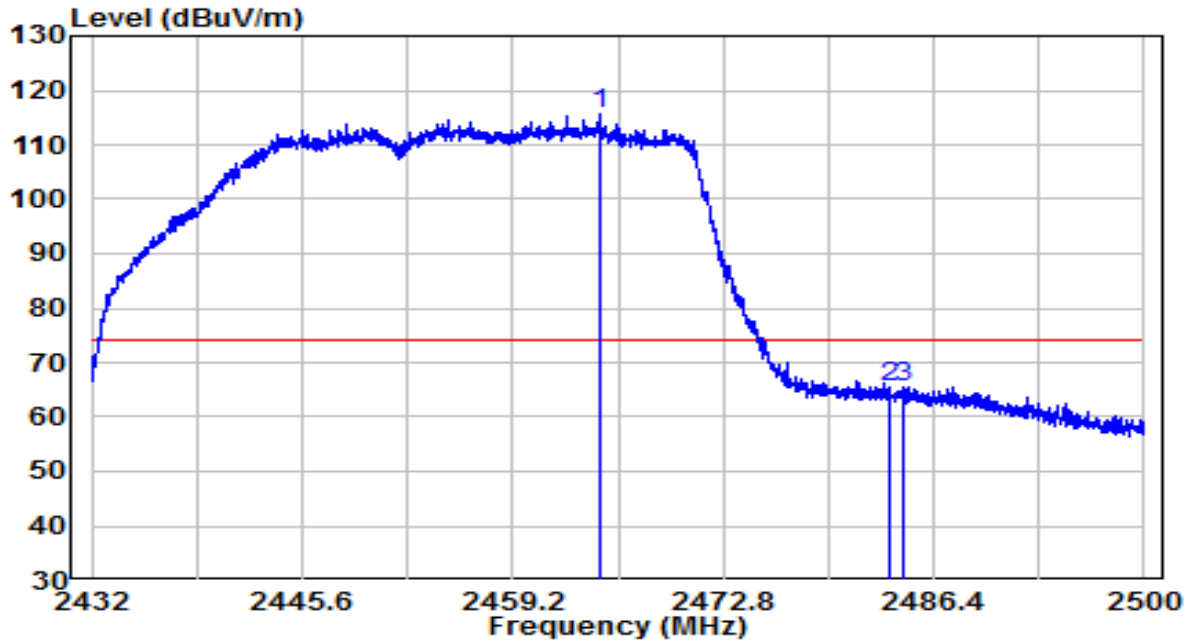


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2464.810	83.14	32.53	115.68	N/A	N/A	Peak
2	2483.500	33.04	32.61	65.65	-8.35	74.00	Peak
3	2484.496	32.91	32.61	65.53	-8.47	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	By PoE

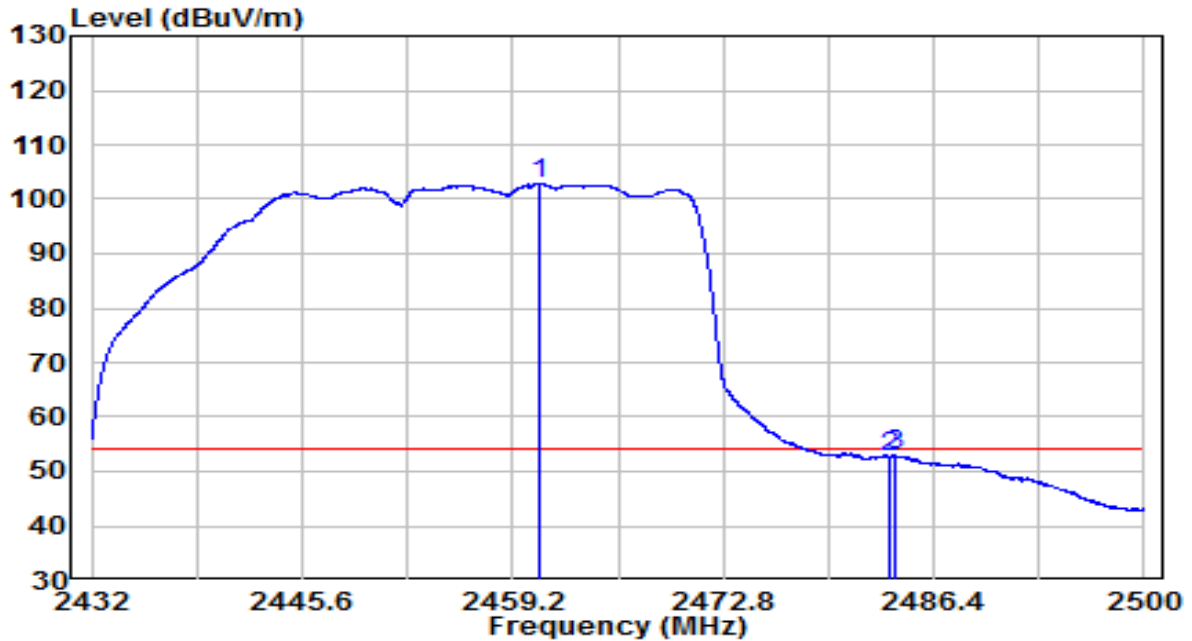


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2460.900	70.26	32.52	102.77	N/A	N/A	Average
2	2483.500	20.14	32.61	52.75	-1.25	54.00	Average
3	2483.850	20.41	32.61	53.02	-0.98	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

**APEX0587 Filter 1#**

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2412MHz	Test Voltage	By PoE

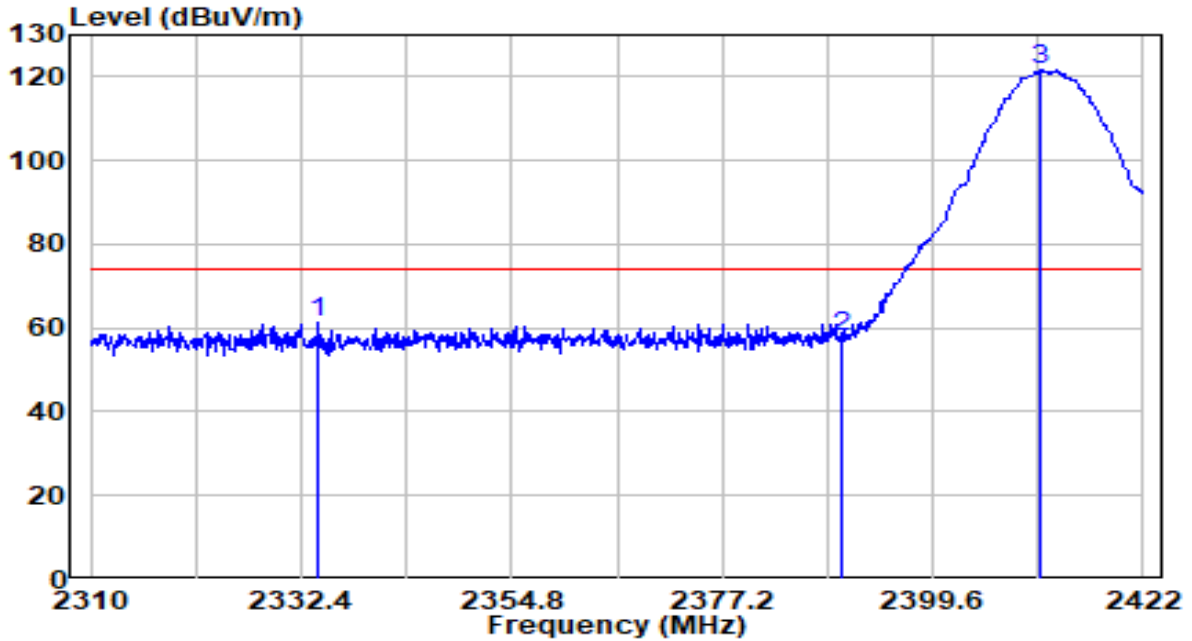


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2334.192	29.33	31.98	61.31	-12.69	74.00	Peak
2	2390.000	25.81	32.22	58.03	-15.97	74.00	Peak
3	* 2411.024	89.42	32.31	121.73	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2412MHz	Test Voltage	By PoE

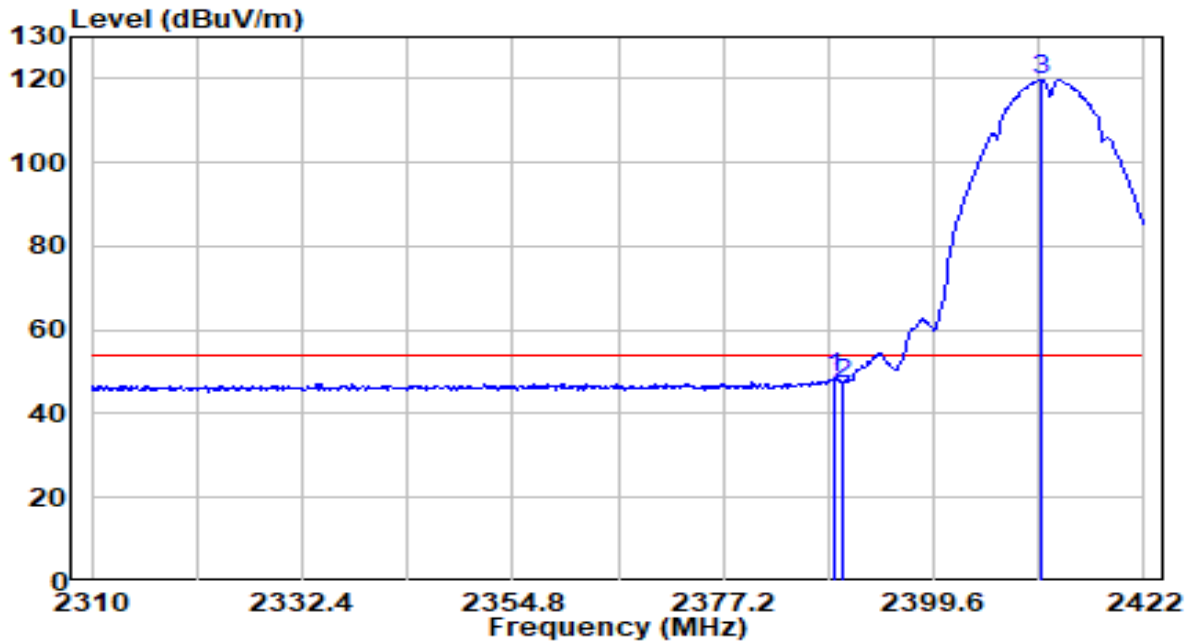


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2389.072	16.22	32.21	48.43	-5.57	54.00	Average
2	2390.000	15.03	32.22	47.25	-6.75	54.00	Average
3	* 2410.912	87.62	32.31	119.93	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2412MHz	Test Voltage	By PoE

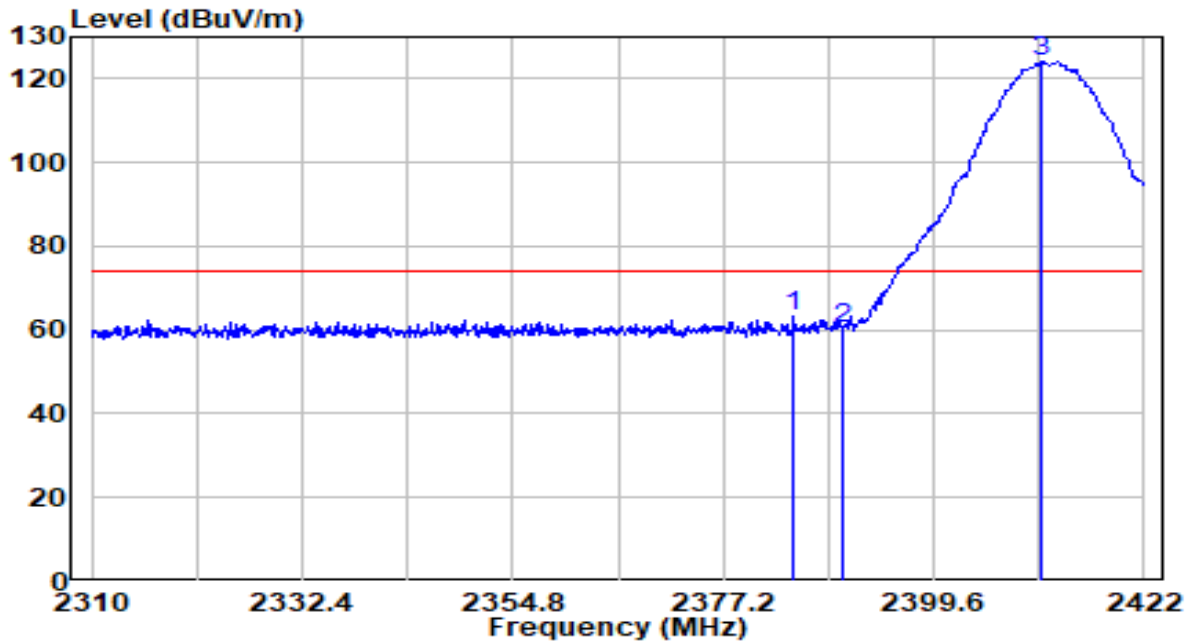


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2384.704	31.12	32.20	63.31	-10.69	74.00	Peak
2	2390.000	28.12	32.22	60.34	-13.66	74.00	Peak
3	* 2411.136	91.87	32.31	124.18	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2412MHz	Test Voltage	By PoE

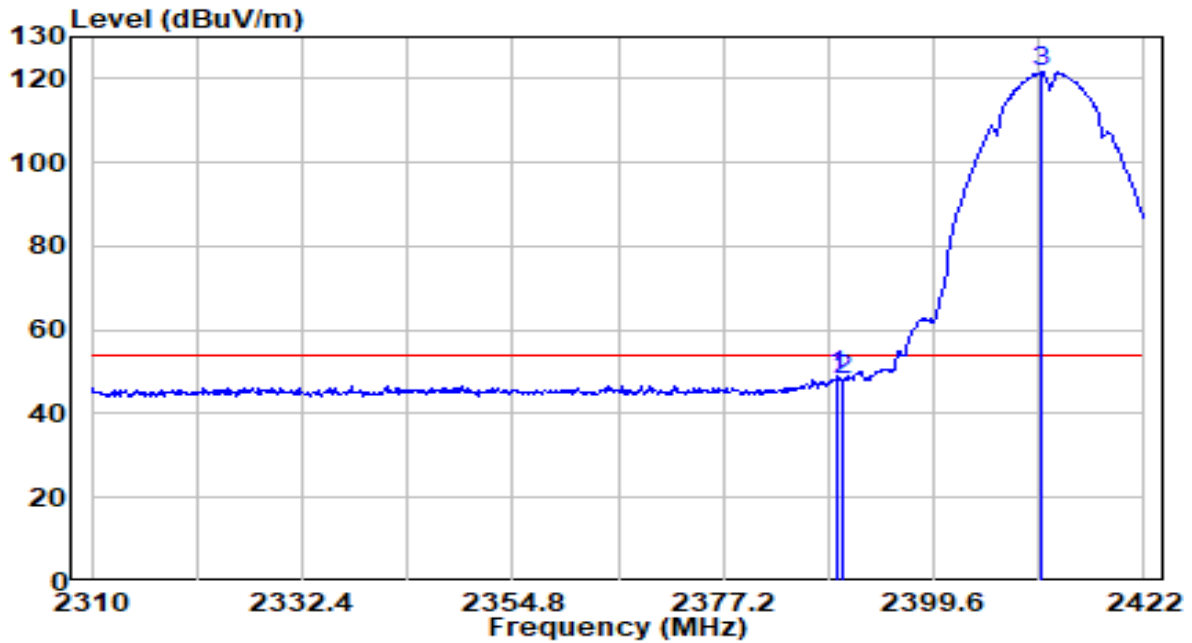


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2389.408	16.80	32.22	49.01	-4.99	54.00	Average
2	2390.000	15.74	32.22	47.96	-6.04	54.00	Average
3	* 2411.136	89.40	32.31	121.71	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2462MHz	Test Voltage	By PoE

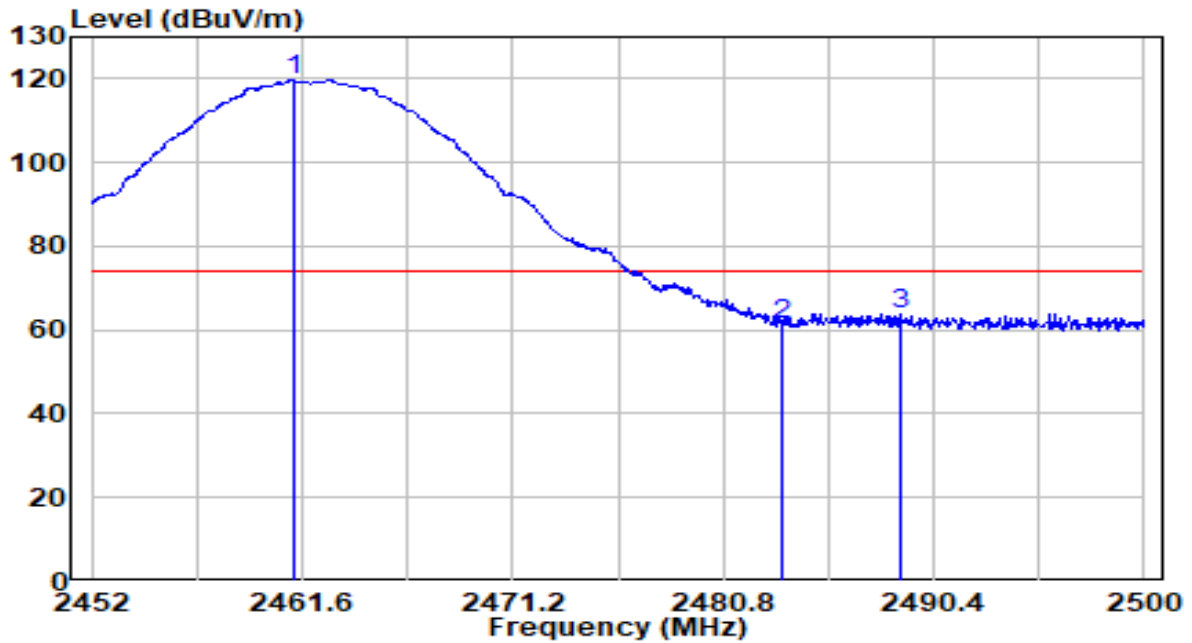


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	87.29	32.52	119.80	N/A	N/A	Peak
2		28.55	32.61	61.16	-12.84	74.00	Peak
3		31.23	32.63	63.86	-10.14	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2462MHz	Test Voltage	By PoE

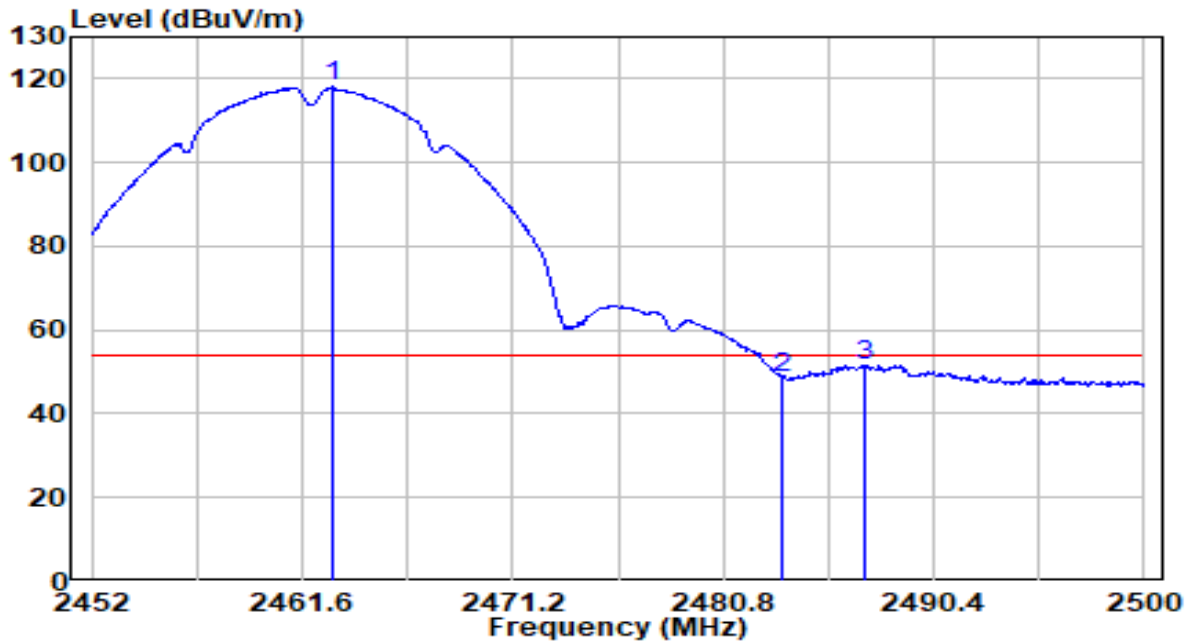


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2462.944	85.48	32.52	118.00	N/A	N/A	Average
2	2483.500	15.88	32.61	48.50	-5.50	54.00	Average
3	2487.280	18.87	32.63	51.50	-2.50	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2462MHz	Test Voltage	By PoE

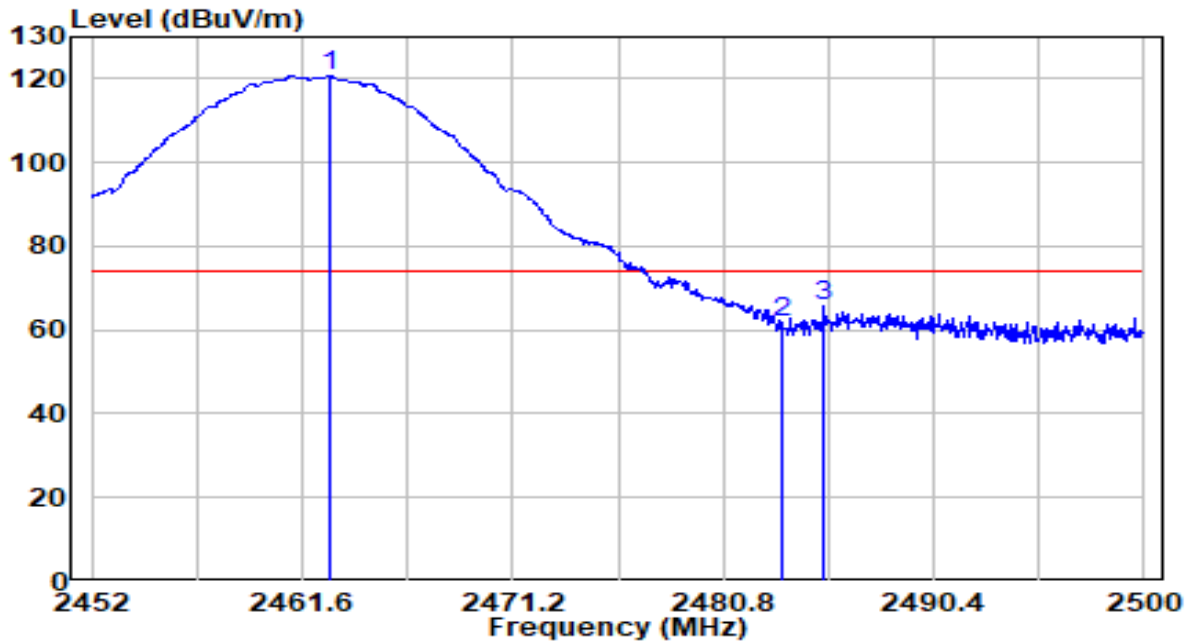


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2462.848	88.27	32.52	120.79	N/A	N/A	Peak
2	2483.500	29.16	32.61	61.77	-12.23	74.00	Peak
3	2485.408	33.20	32.62	65.82	-8.18	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2462MHz	Test Voltage	By PoE

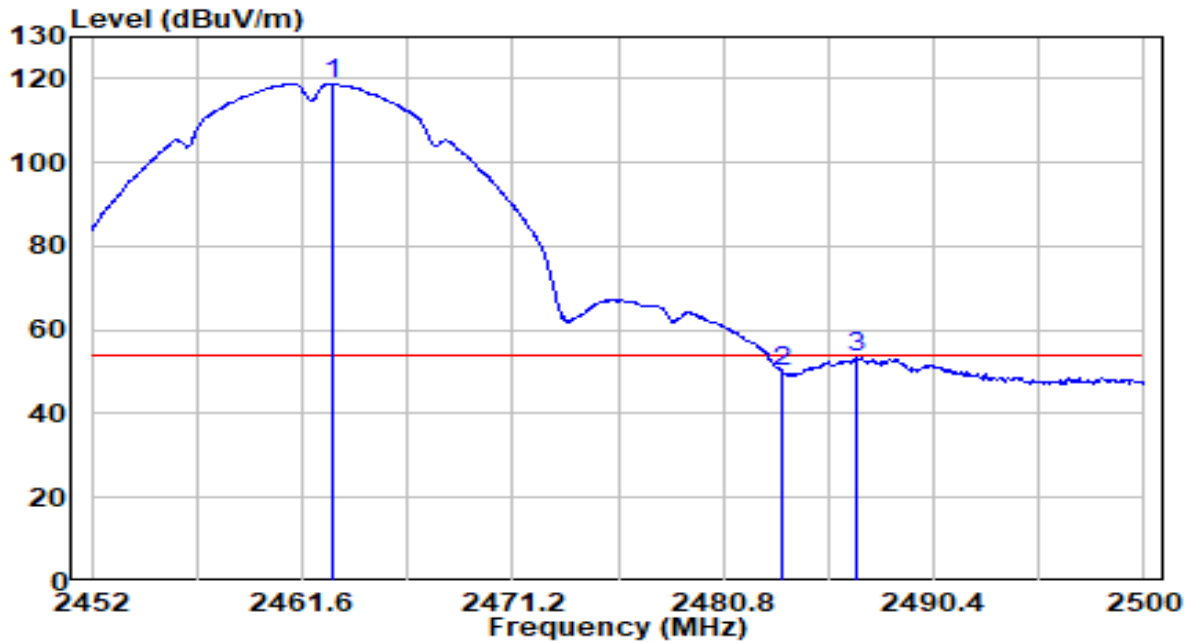


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2462.992	86.43	32.52	118.95	N/A	N/A	Average
2	2483.500	17.63	32.61	50.24	-3.76	54.00	Average
3	2486.896	20.69	32.62	53.32	-0.68	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2412MHz	Test Voltage	By PoE

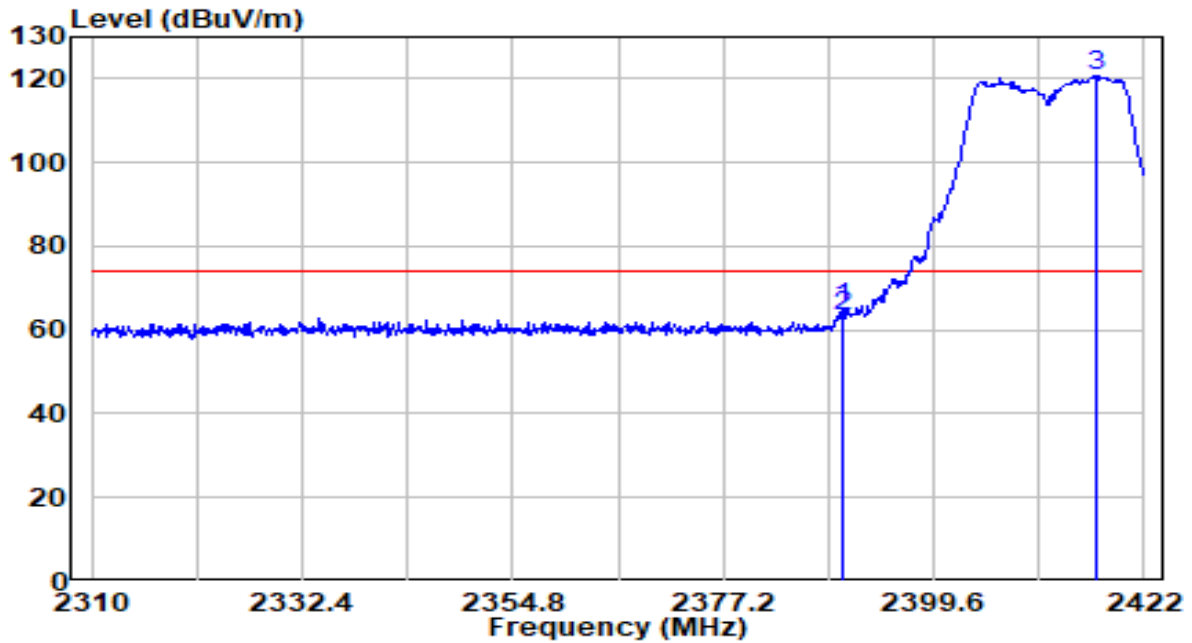


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2389.856	32.89	32.22	65.11	-8.89	74.00	Peak
2	2390.000	31.25	32.22	63.47	-10.53	74.00	Peak
3	* 2416.960	88.47	32.33	120.80	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2412MHz	Test Voltage	By PoE

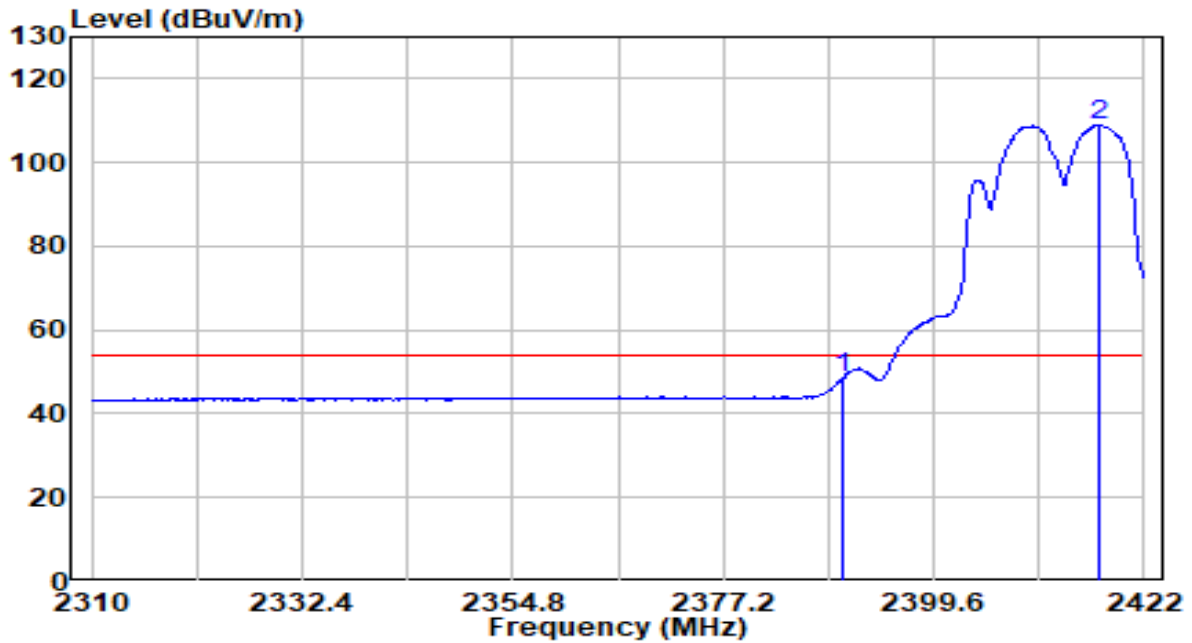


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	16.51	32.22	48.73	-5.27	54.00	Average
2	* 2417.184	76.55	32.33	108.88	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2412MHz	Test Voltage	By PoE

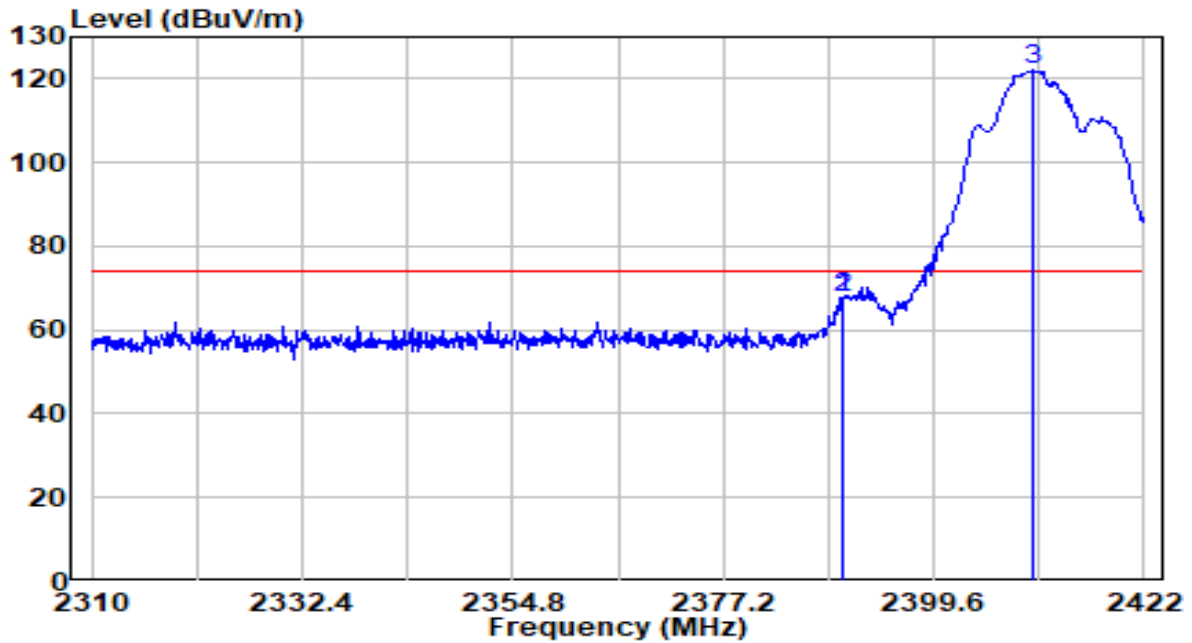


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2389.968	35.53	32.22	67.75	-6.25	74.00	Peak
2	2390.000	35.53	32.22	67.75	-6.25	74.00	Peak
3	* 2410.240	89.81	32.30	122.11	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2412MHz	Test Voltage	By PoE

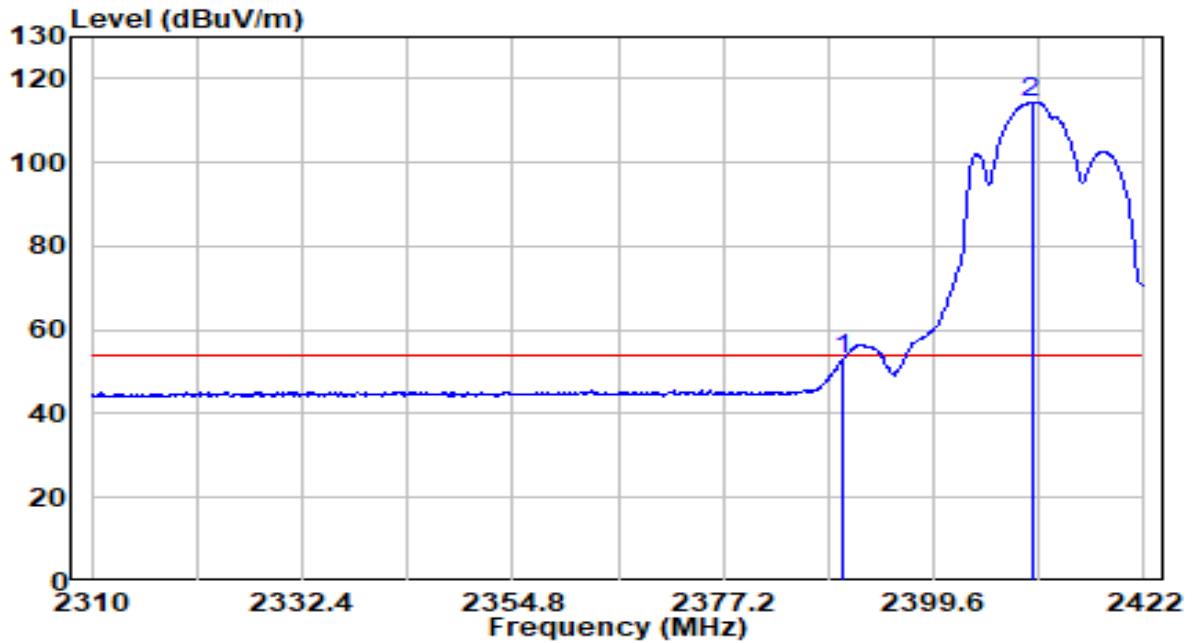


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	20.83	32.22	53.04	-0.96	54.00	Average
2	* 2410.016	82.15	32.30	114.45	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2452MHz	Test Voltage	By PoE

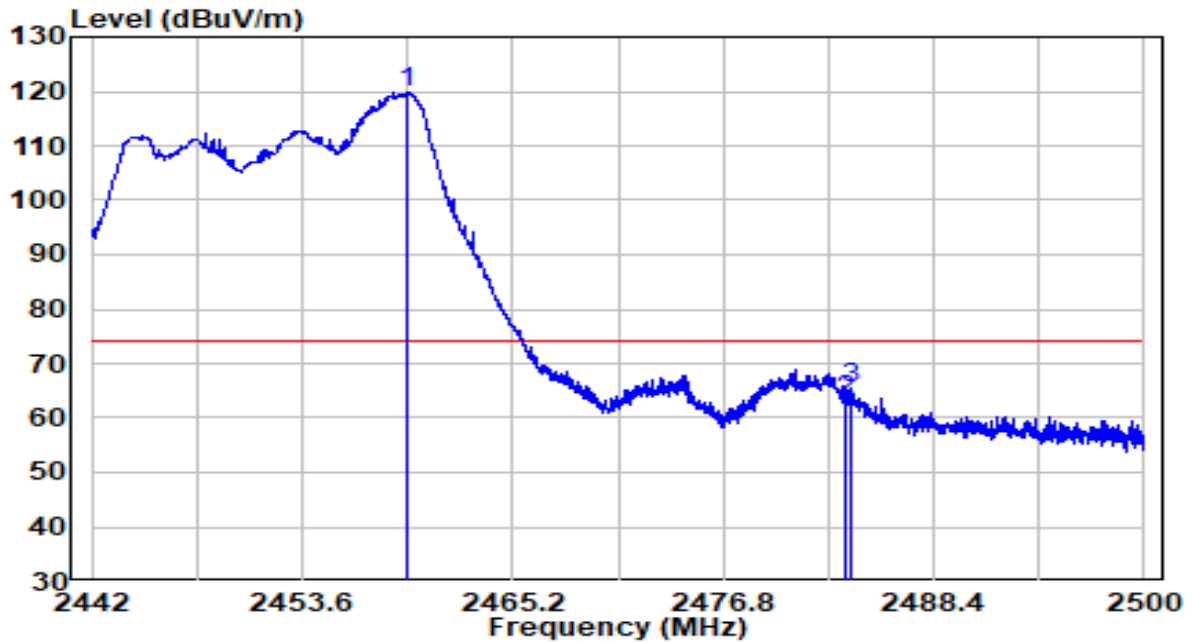


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2459.400	87.22	32.51	119.73	N/A	N/A	Peak
2	2483.500	30.56	32.61	63.18	-10.82	74.00	Peak
3	2483.818	32.87	32.61	65.49	-8.51	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2452MHz	Test Voltage	By PoE

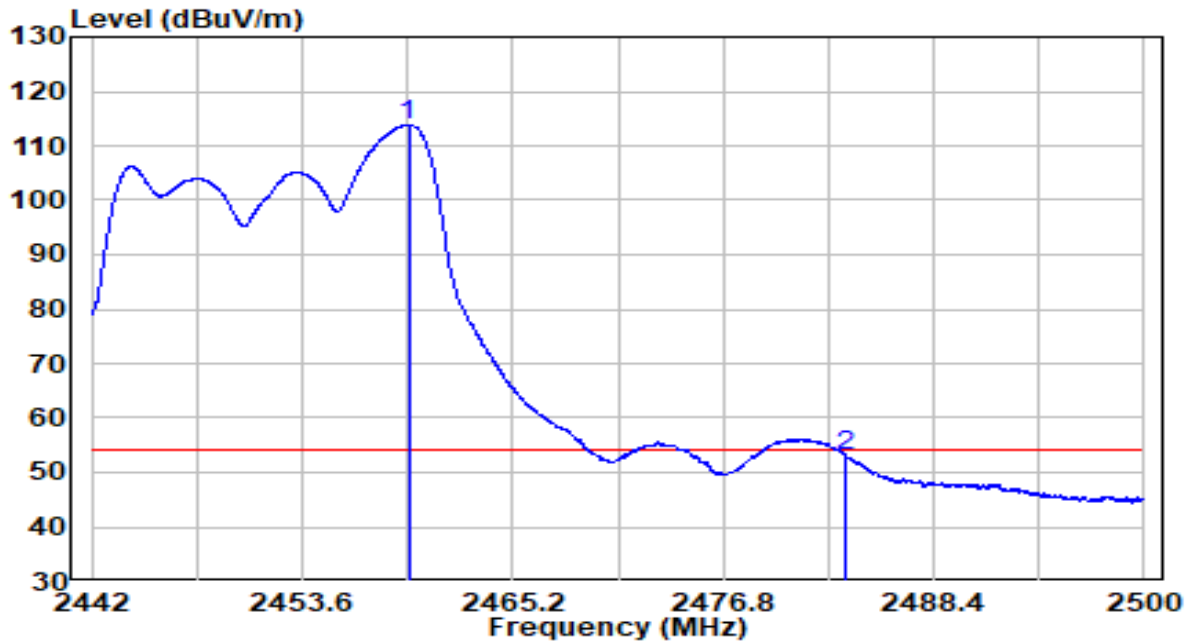


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2459.458	81.40	32.51	113.91	N/A	N/A	Average
2	2483.500	20.45	32.61	53.06	-0.94	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2452MHz	Test Voltage	By PoE

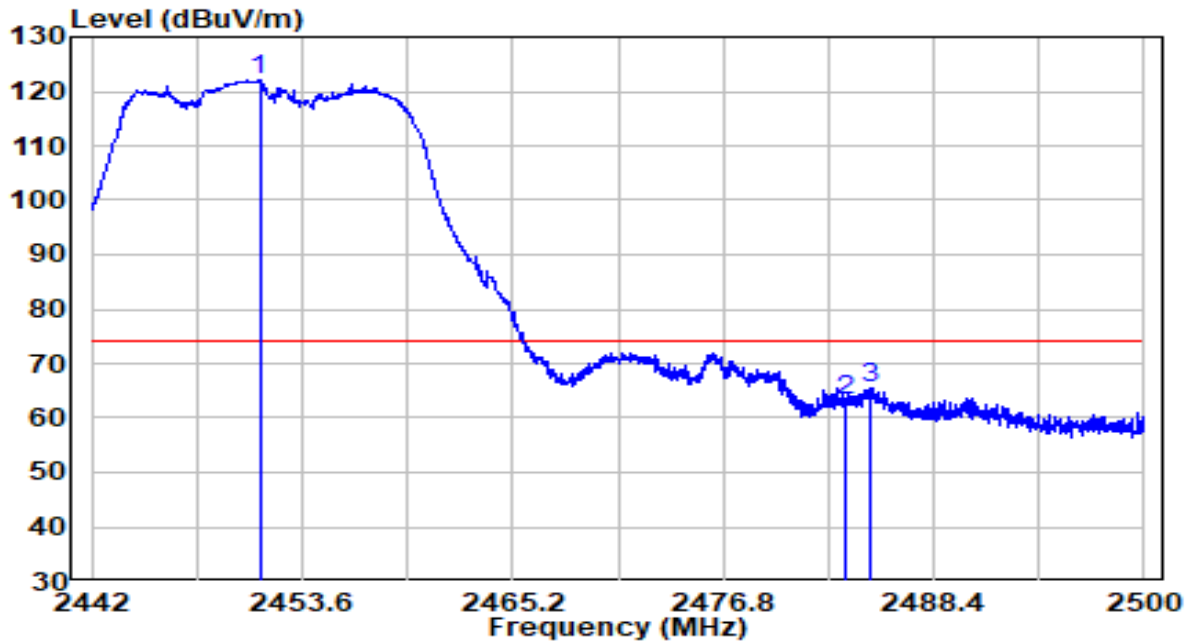


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2451.251	89.58	32.48	122.05	N/A	N/A	Peak
2		2483.500	30.79	32.61	63.40	-10.60	74.00	Peak
3		2484.978	32.73	32.62	65.34	-8.66	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2452MHz	Test Voltage	By PoE

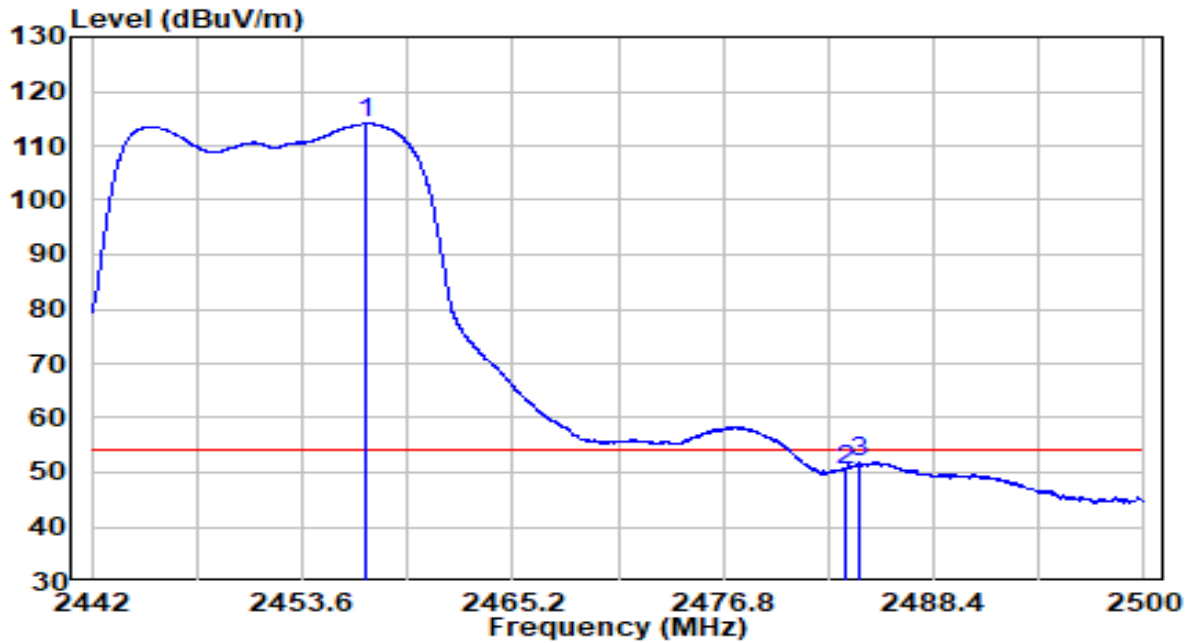


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2457.138	81.55	32.50	114.05	N/A	N/A	Average
2	2483.500	17.91	32.61	50.52	-3.48	54.00	Average
3	2484.253	19.37	32.61	51.99	-2.01	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2457MHz	Test Voltage	By PoE

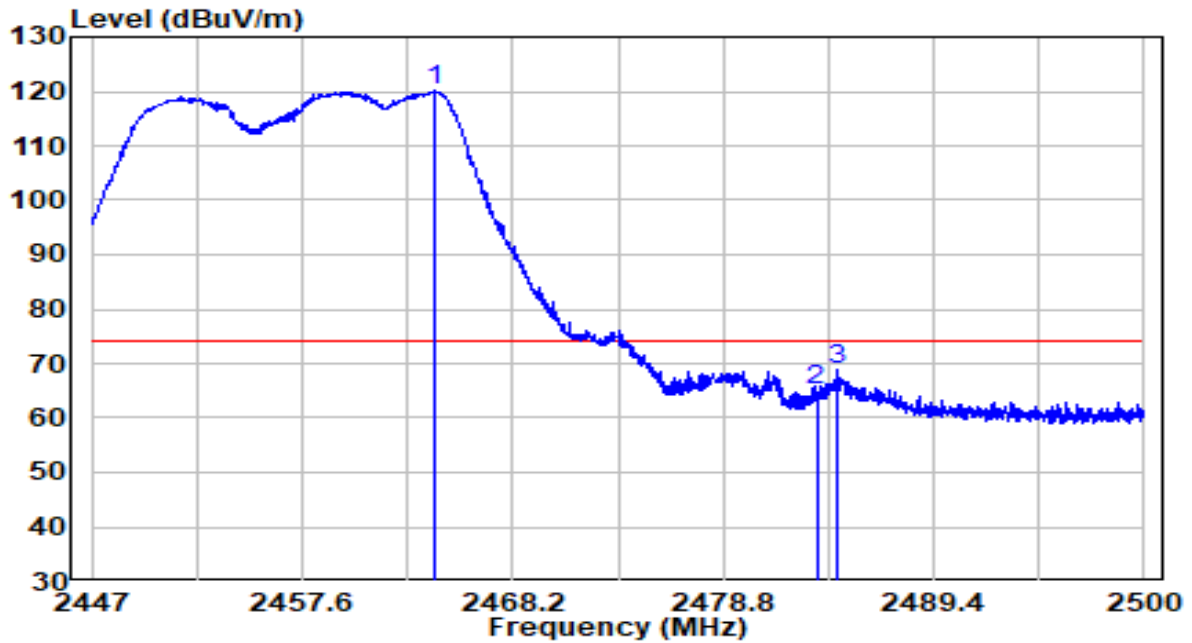


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2464.251	87.66	32.53	120.19	N/A	N/A	Peak
2	2483.500	32.48	32.61	65.09	-8.91	74.00	Peak
3	2484.604	36.08	32.62	68.69	-5.31	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2457MHz	Test Voltage	By PoE

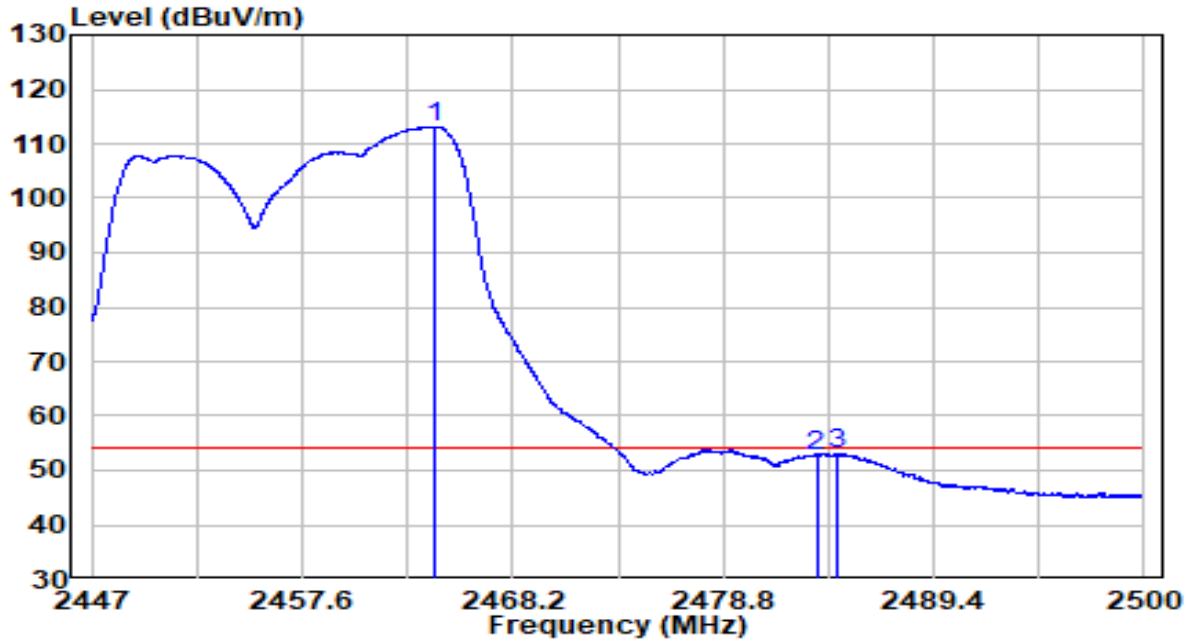


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2464.278	80.68	32.53	113.21	N/A	N/A	Average
2	2483.500	20.17	32.61	52.78	-1.22	54.00	Average
3	2484.604	20.48	32.62	53.10	-0.90	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2457MHz	Test Voltage	By PoE

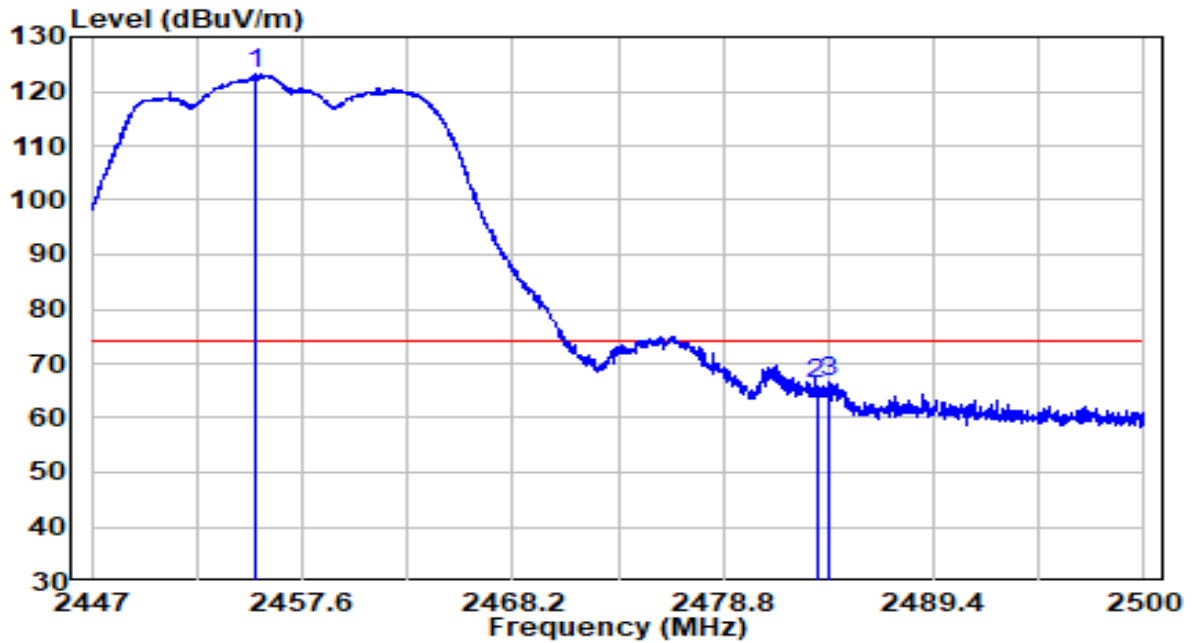


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2455.188	90.65	32.49	123.14	N/A	N/A	Peak
2	2483.500	33.72	32.61	66.33	-7.67	74.00	Peak
3	2484.126	34.00	32.61	66.61	-7.39	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2457MHz	Test Voltage	By PoE

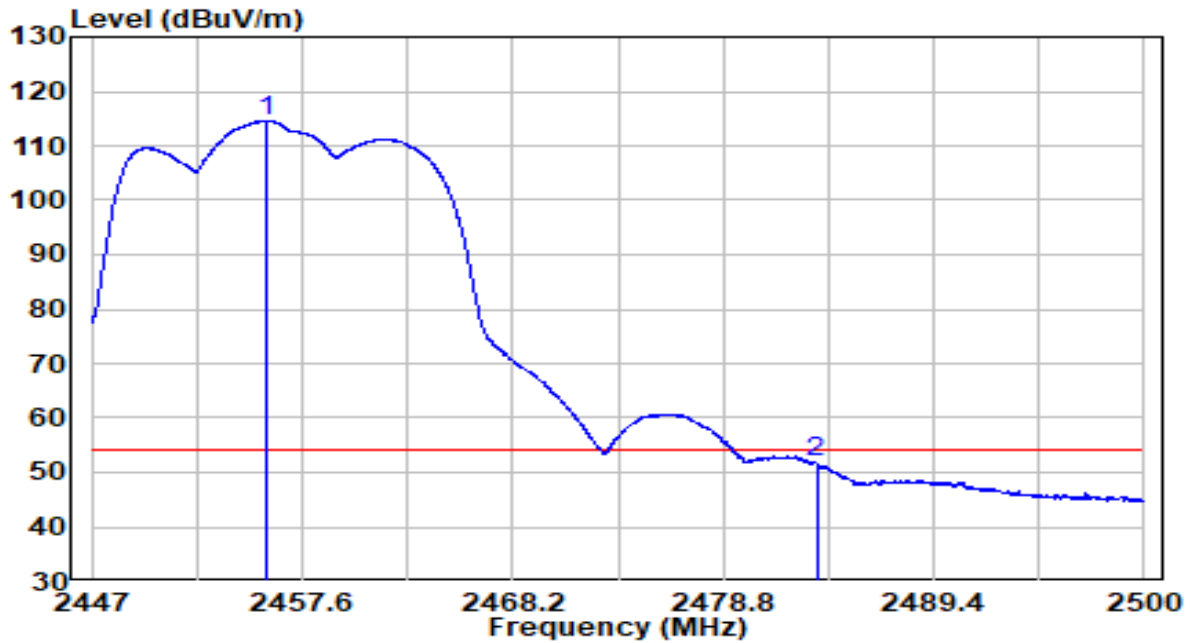


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2455.798	82.06	32.49	114.55	N/A	N/A	Average
2	2483.500	19.21	32.61	51.82	-2.18	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2462MHz	Test Voltage	By PoE

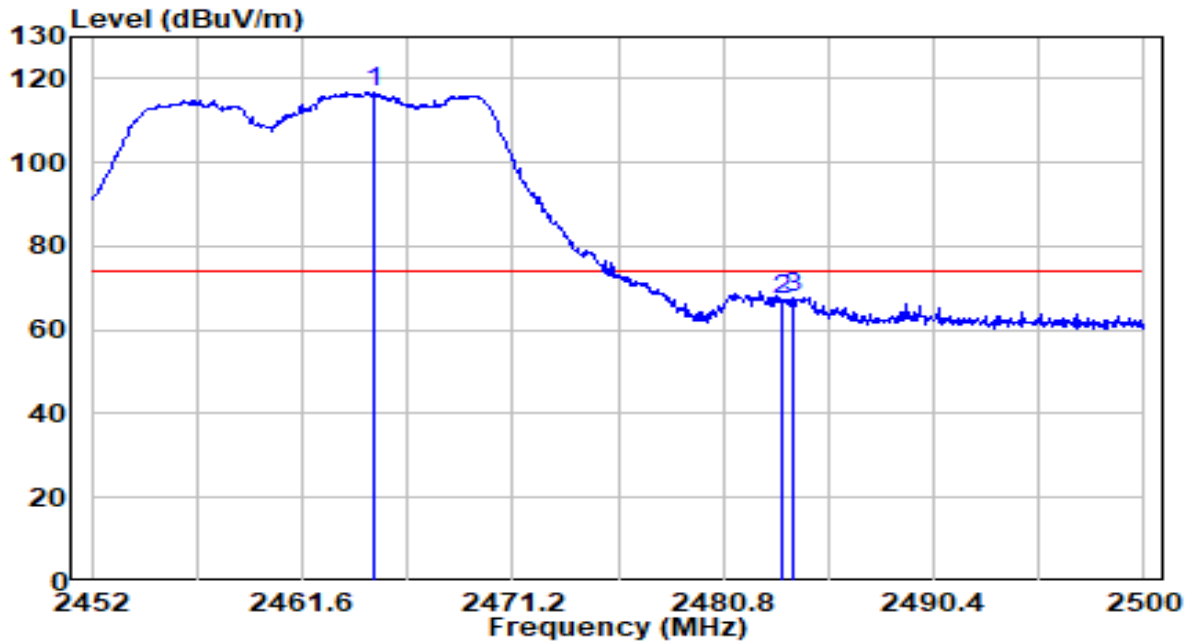


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	84.19	32.53	116.72	N/A	N/A	Peak
2		34.50	32.61	67.11	-6.89	74.00	Peak
3		35.31	32.61	67.92	-6.08	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2462MHz	Test Voltage	By PoE

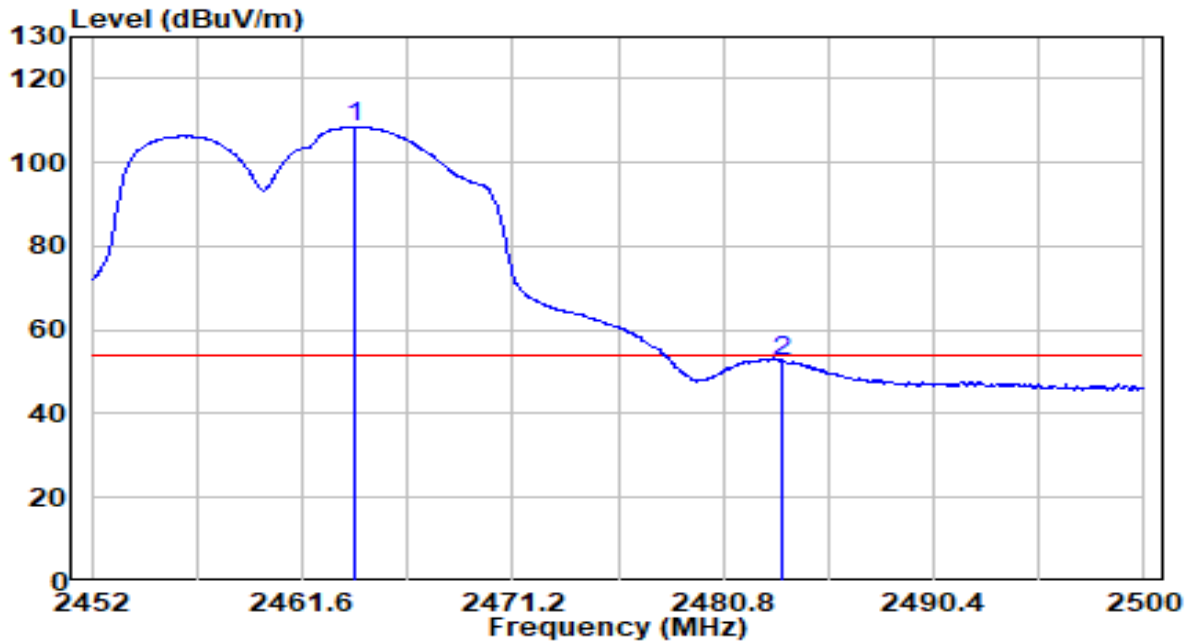


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2464.048	75.96	32.53	108.49	N/A	N/A	Average
2	2483.500	19.93	32.61	52.54	-1.46	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2462MHz	Test Voltage	By PoE

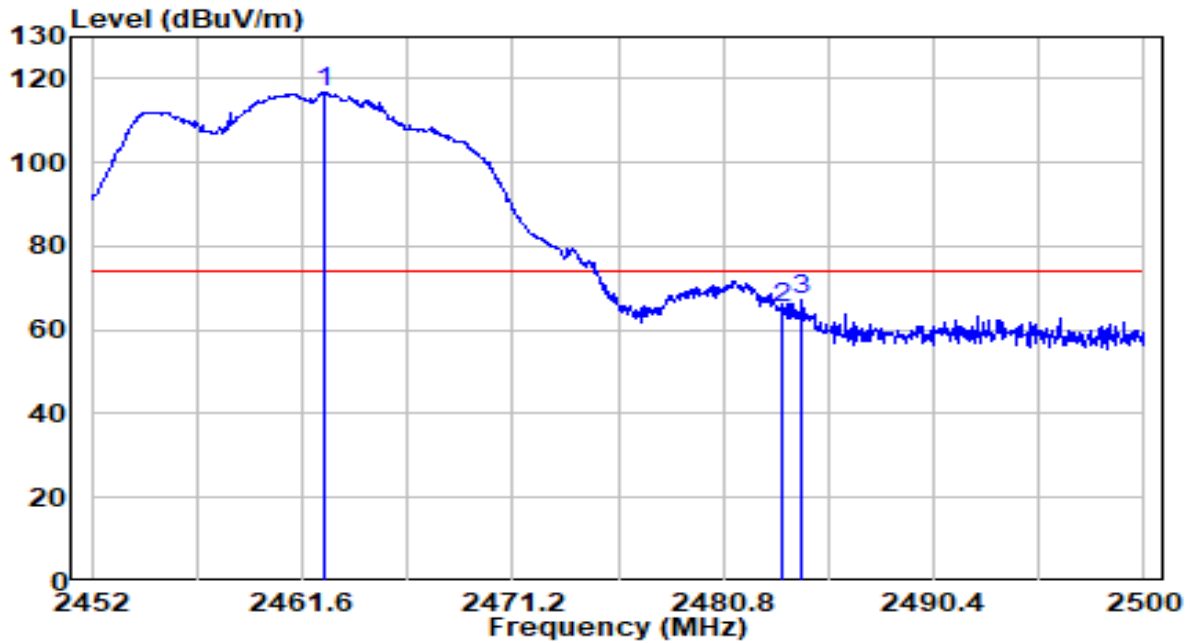


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	*	84.10	32.52	116.62	N/A	N/A	Peak
2		32.48	32.61	65.09	-8.91	74.00	Peak
3		34.38	32.61	67.00	-7.00	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2462MHz	Test Voltage	By PoE

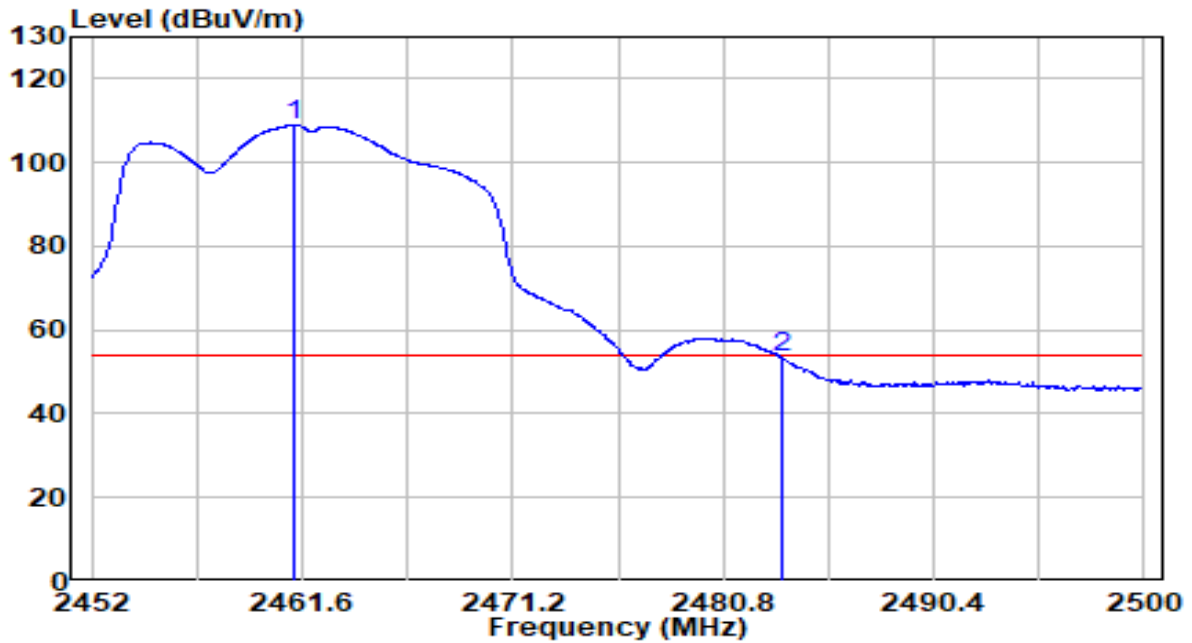


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2461.168	76.41	32.52	108.93	N/A	N/A	Average
2	2483.500	20.68	32.61	53.29	-0.71	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2412MHz	Test Voltage	By PoE

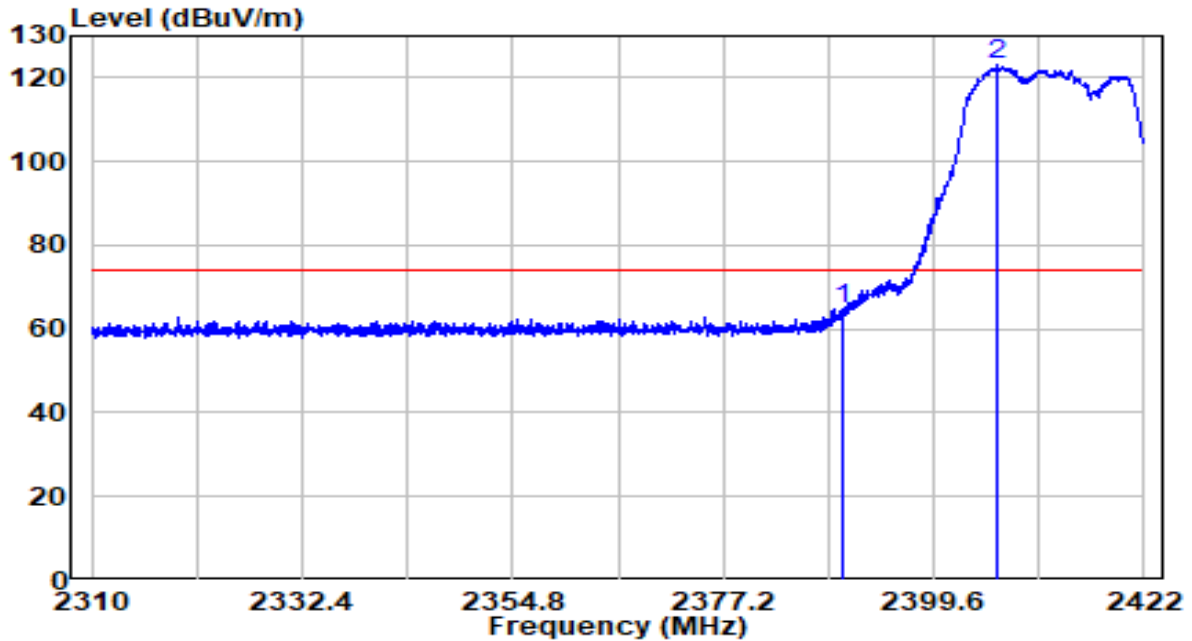


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	32.44	32.22	64.66	-9.34	74.00	Peak
2	* 2406.376	90.60	32.29	122.89	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2412MHz	Test Voltage	By PoE

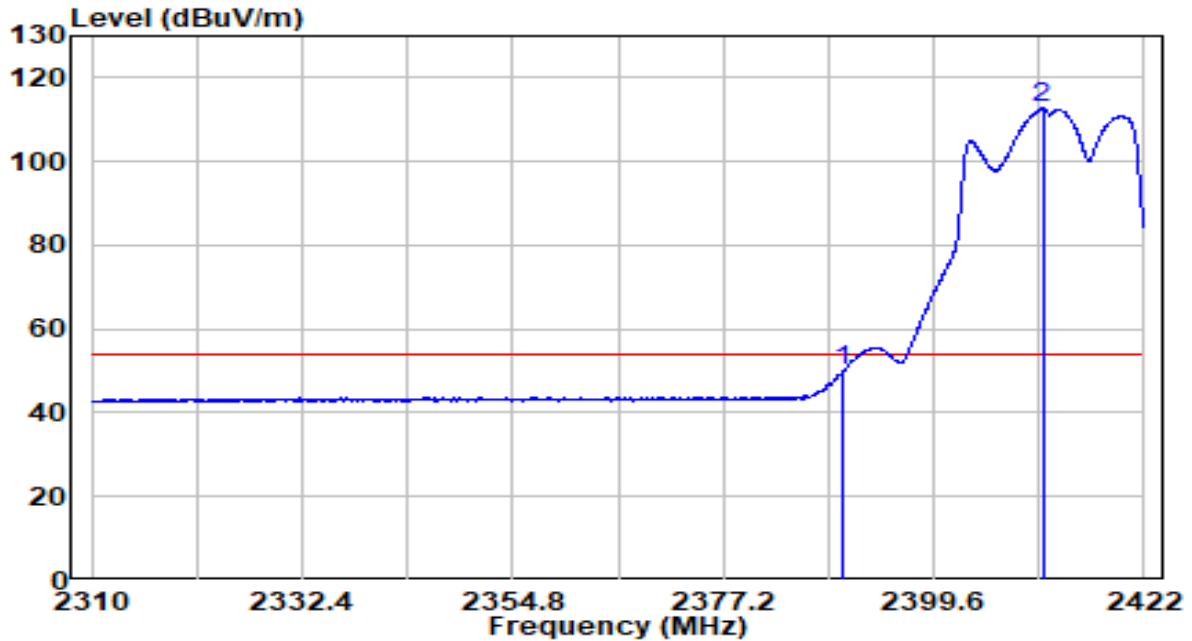


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	17.95	32.22	50.17	-3.83	54.00	Average
2	* 2411.192	80.33	32.31	112.64	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2412MHz	Test Voltage	By PoE

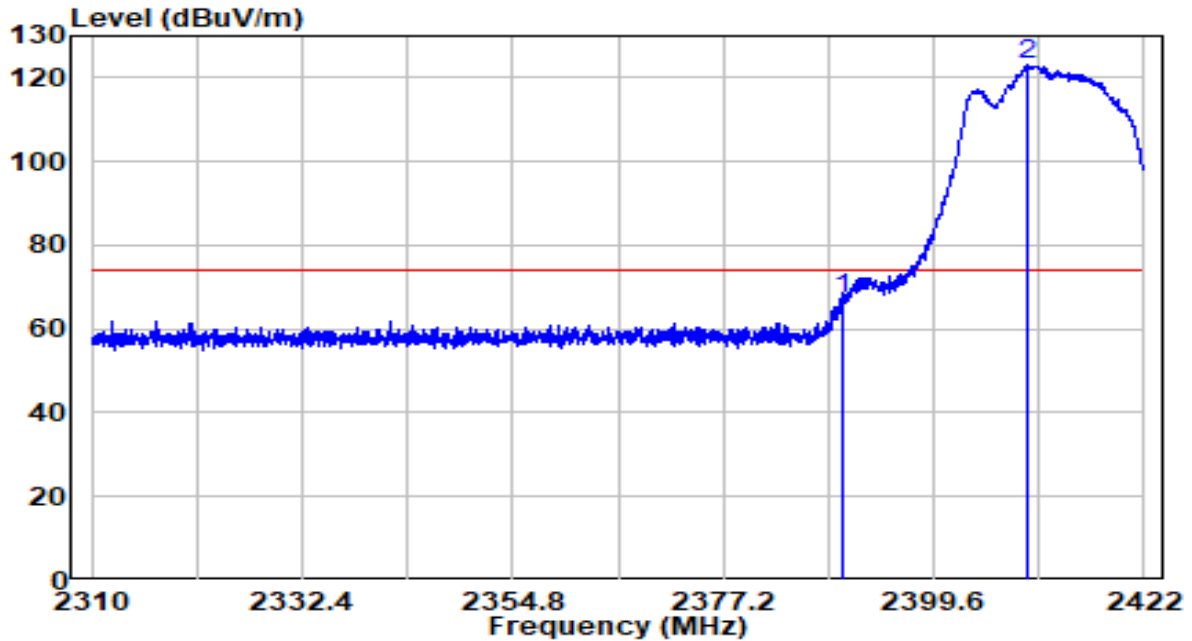


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	35.04	32.22	67.26	-6.74	74.00	Peak
2	* 2409.568	90.77	32.30	123.07	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2412MHz	Test Voltage	By PoE

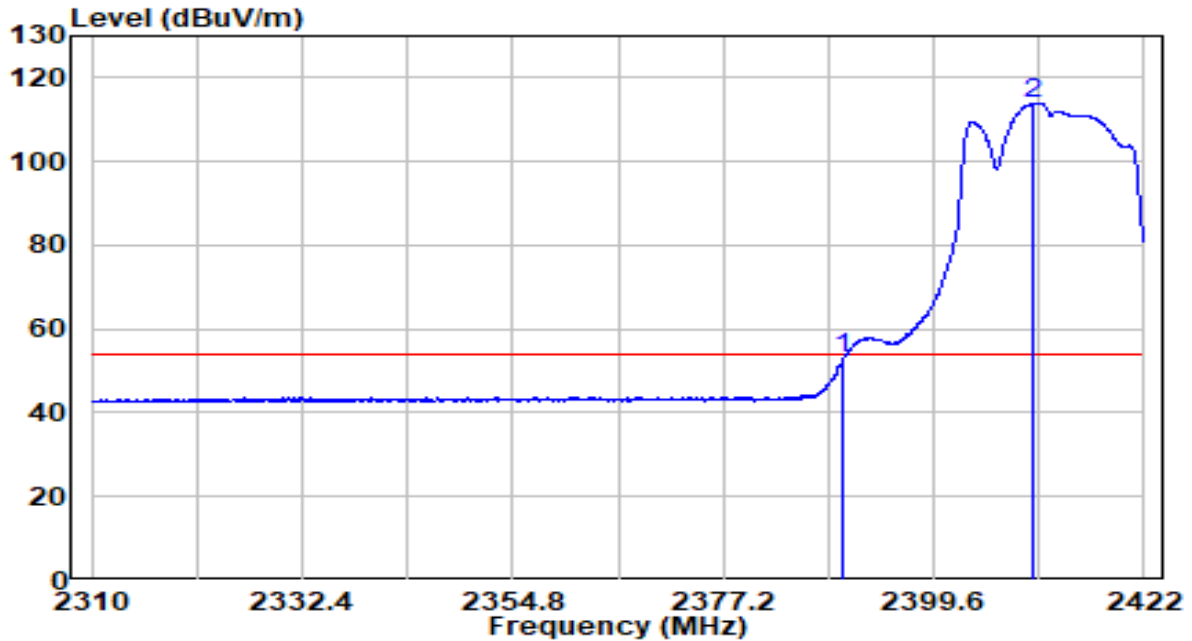


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	20.76	32.22	52.98	-1.02	54.00	Average
2	* 2410.184	81.61	32.30	113.91	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2452MHz	Test Voltage	By PoE

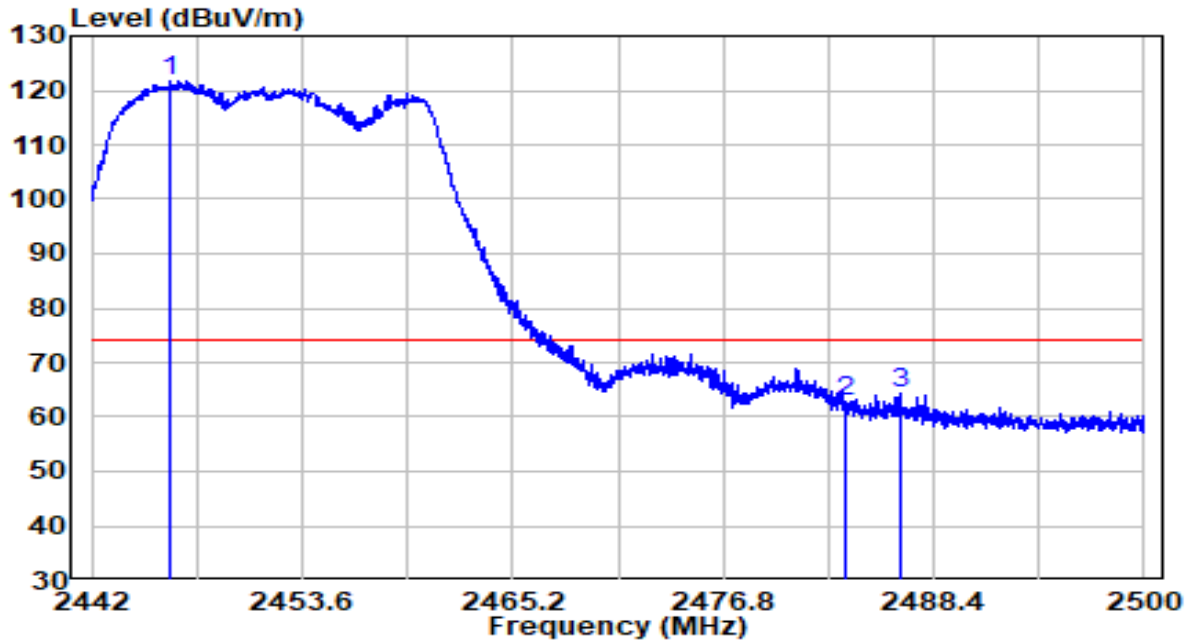


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2446.263	89.43	32.45	121.89	N/A	N/A	Peak
2		2483.500	30.33	32.61	62.94	-11.06	74.00	Peak
3		2486.602	31.75	32.62	64.37	-9.63	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2452MHz	Test Voltage	By PoE

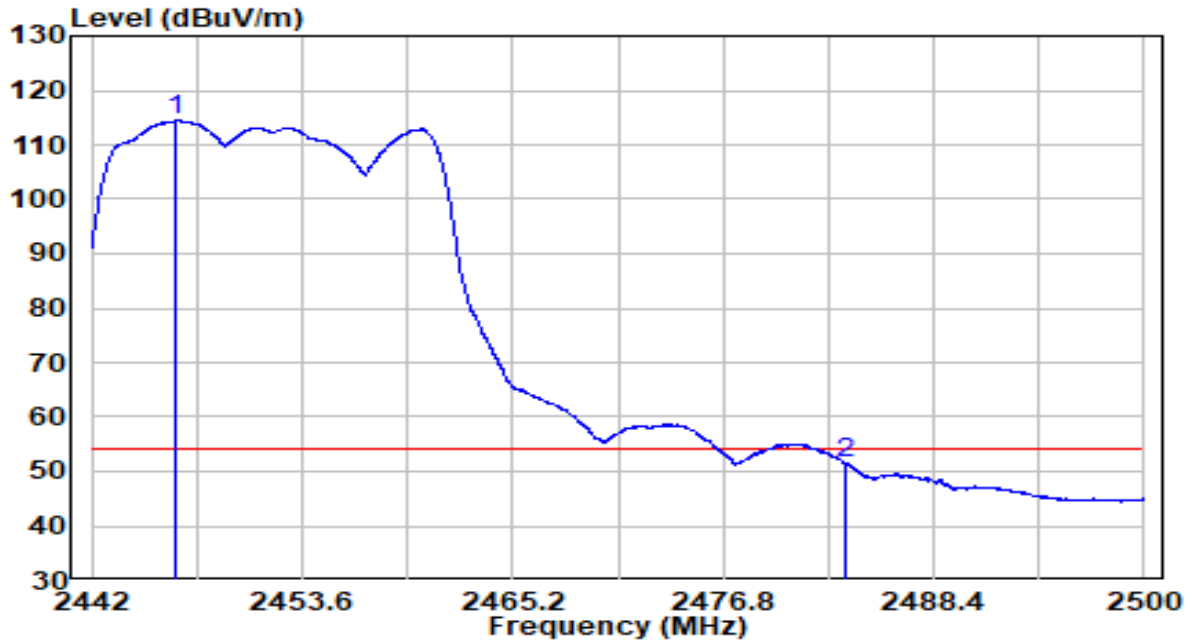


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2446.669	82.01	32.46	114.47	N/A	N/A	Average
2		2483.500	18.97	32.61	51.58	-2.42	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2452MHz	Test Voltage	By PoE

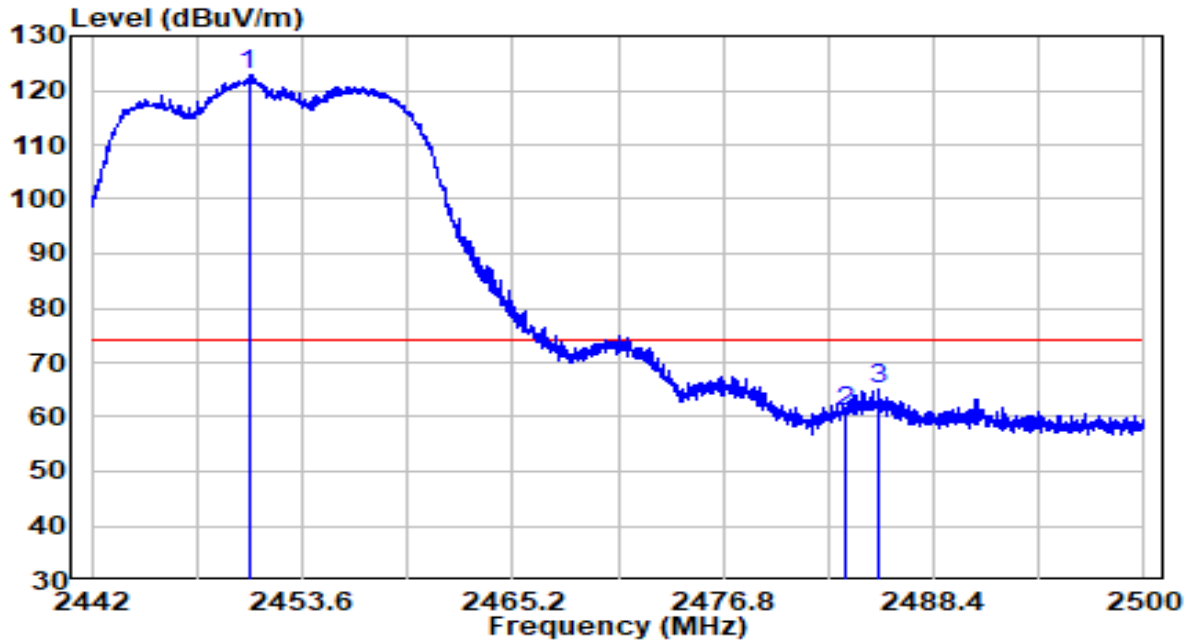


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2450.642	90.38	32.47	122.86	N/A	N/A	Peak
2	2483.500	28.26	32.61	60.87	-13.13	74.00	Peak
3	2485.413	32.51	32.62	65.13	-8.87	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2452MHz	Test Voltage	By PoE

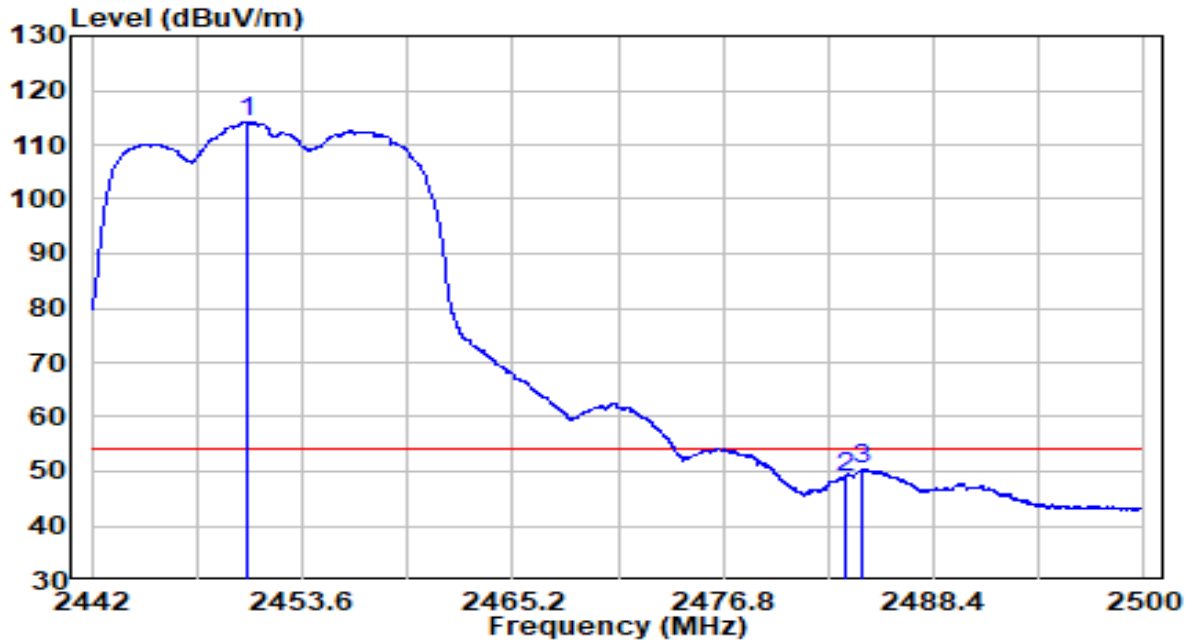


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2450.613	81.85	32.47	114.32	N/A	N/A	Average
2	2483.500	16.23	32.61	48.84	-5.16	54.00	Average
3	2484.514	17.63	32.61	50.25	-3.75	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2457MHz	Test Voltage	By PoE

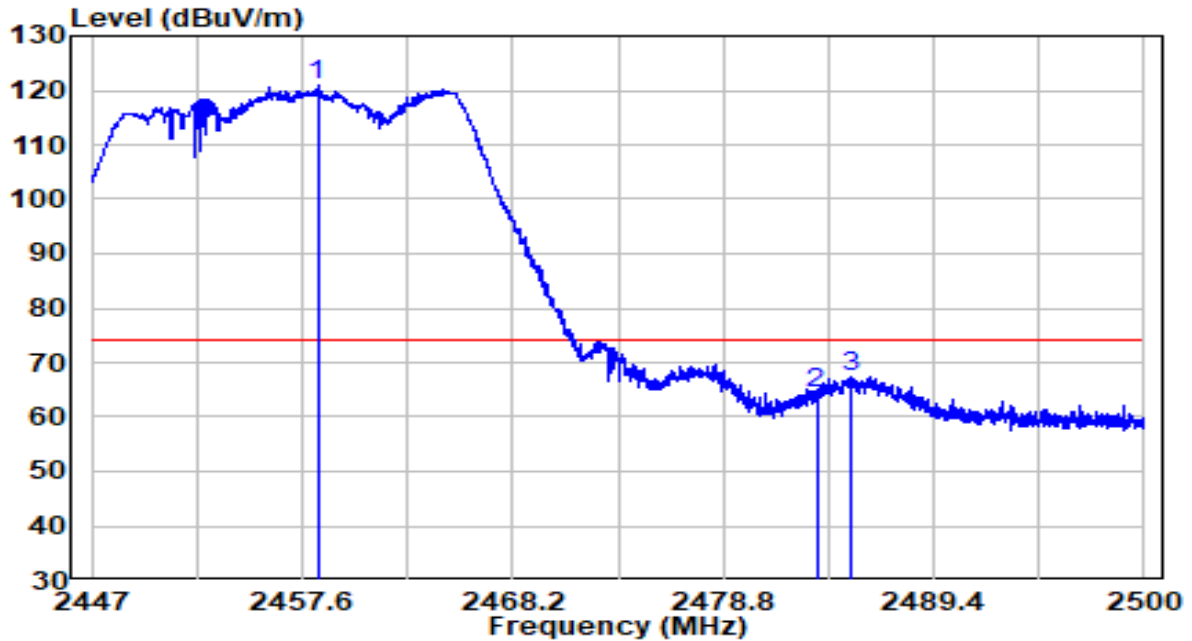


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2458.368	88.27	32.51	120.77	N/A	N/A	Peak
2	2483.500	31.68	32.61	64.29	-9.71	74.00	Peak
3	2485.213	34.85	32.62	67.47	-6.53	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2457MHz	Test Voltage	By PoE

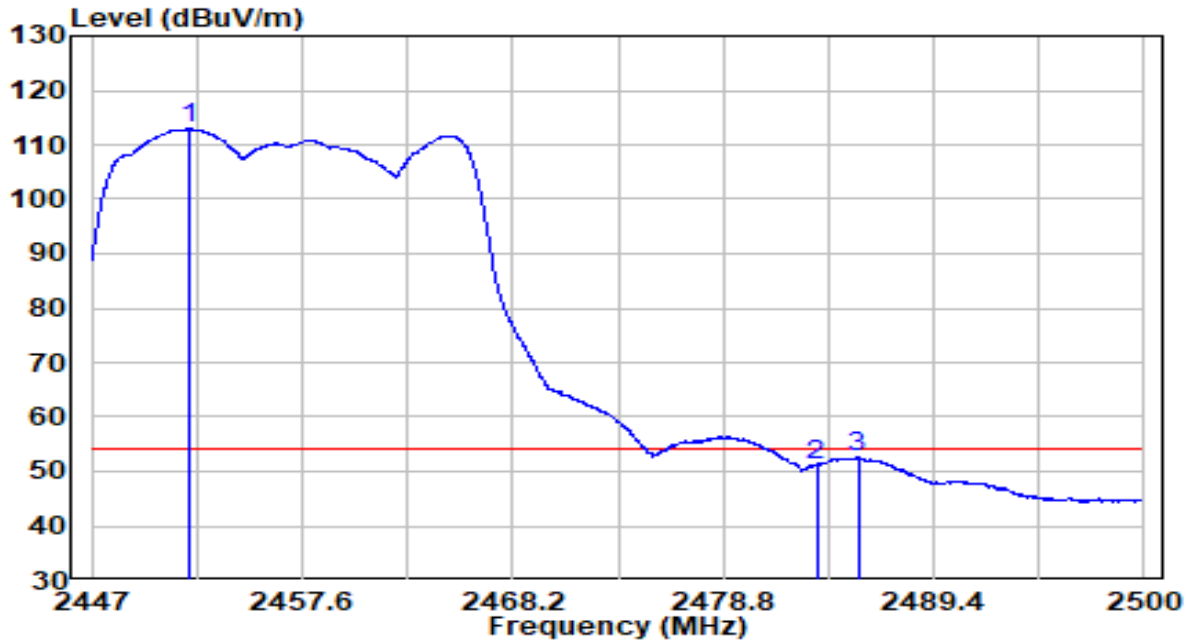


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	80.38	32.48	112.86	N/A	N/A	Average
2		18.55	32.61	51.16	-2.84	54.00	Average
3	*	20.08	32.62	52.70	-1.30	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2457MHz	Test Voltage	By PoE

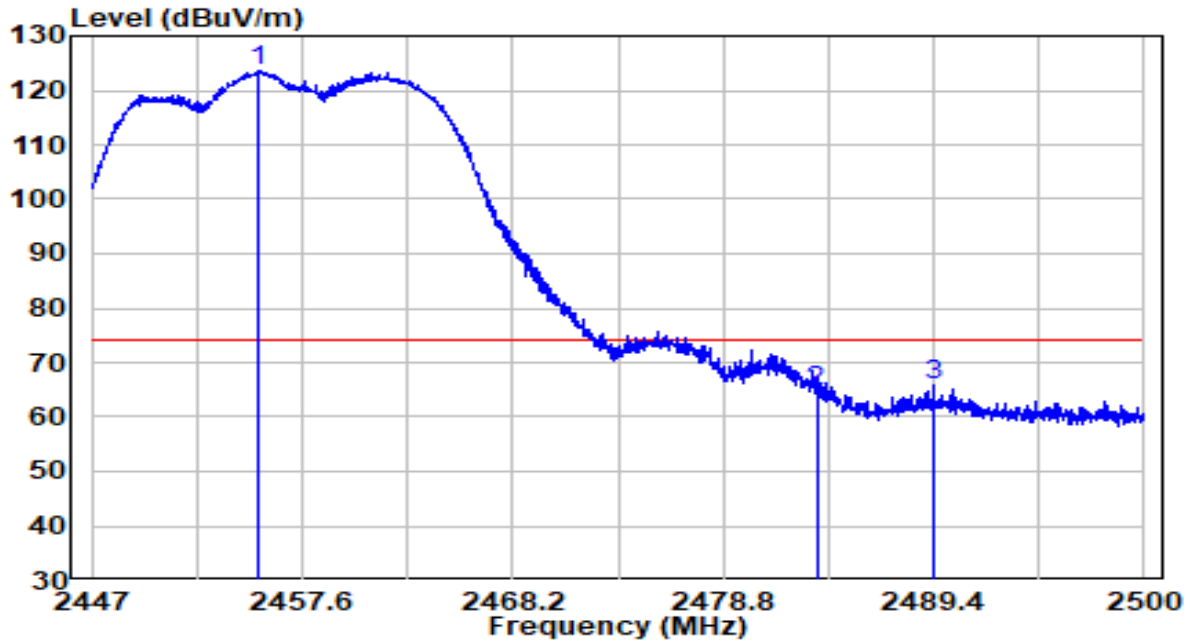


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2455.427	91.02	32.49	123.51	N/A	N/A	Peak
2	2483.500	32.29	32.61	64.90	-9.10	74.00	Peak
3	2489.427	33.13	32.64	65.77	-8.23	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2457MHz	Test Voltage	By PoE

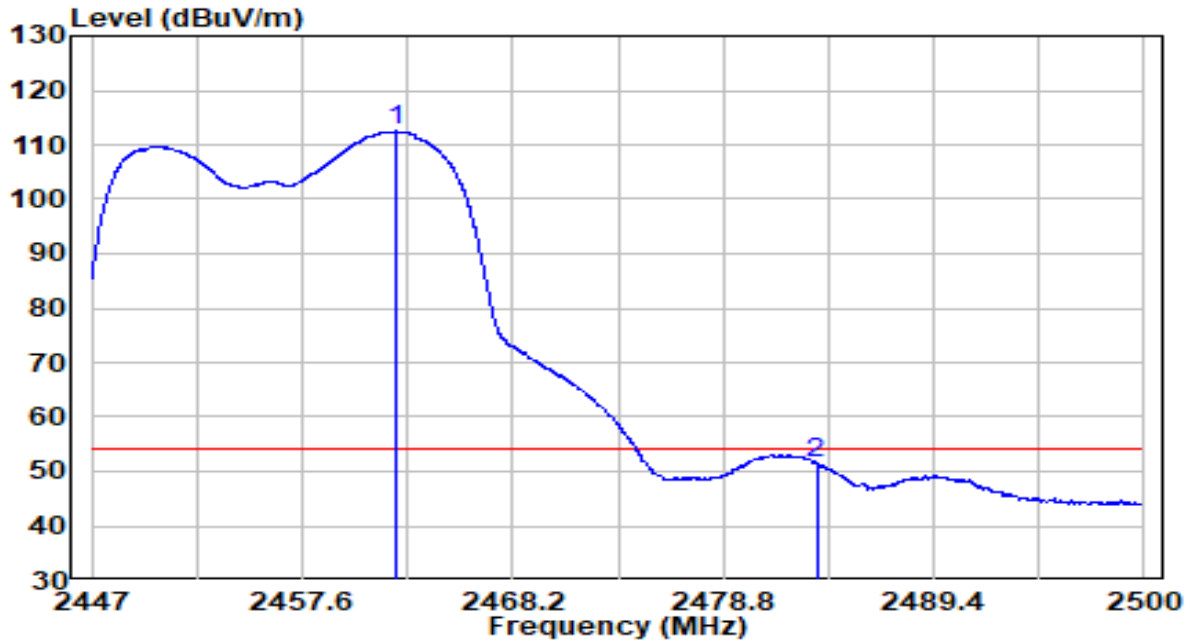


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2462.291	79.94	32.52	112.46	N/A	N/A	Average
2	2483.500	19.02	32.61	51.63	-2.37	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2462MHz	Test Voltage	By PoE

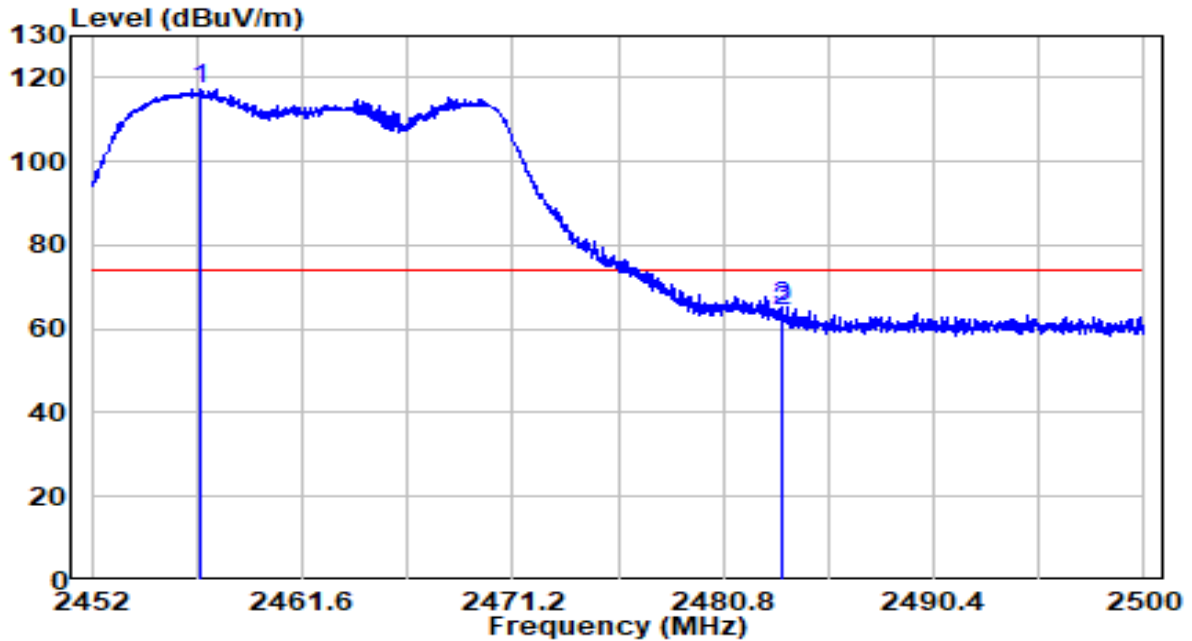


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	84.98	32.50	117.48	N/A	N/A	Peak
2		31.65	32.61	64.26	-9.74	74.00	Peak
3		32.70	32.61	65.31	-8.69	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2462MHz	Test Voltage	By PoE

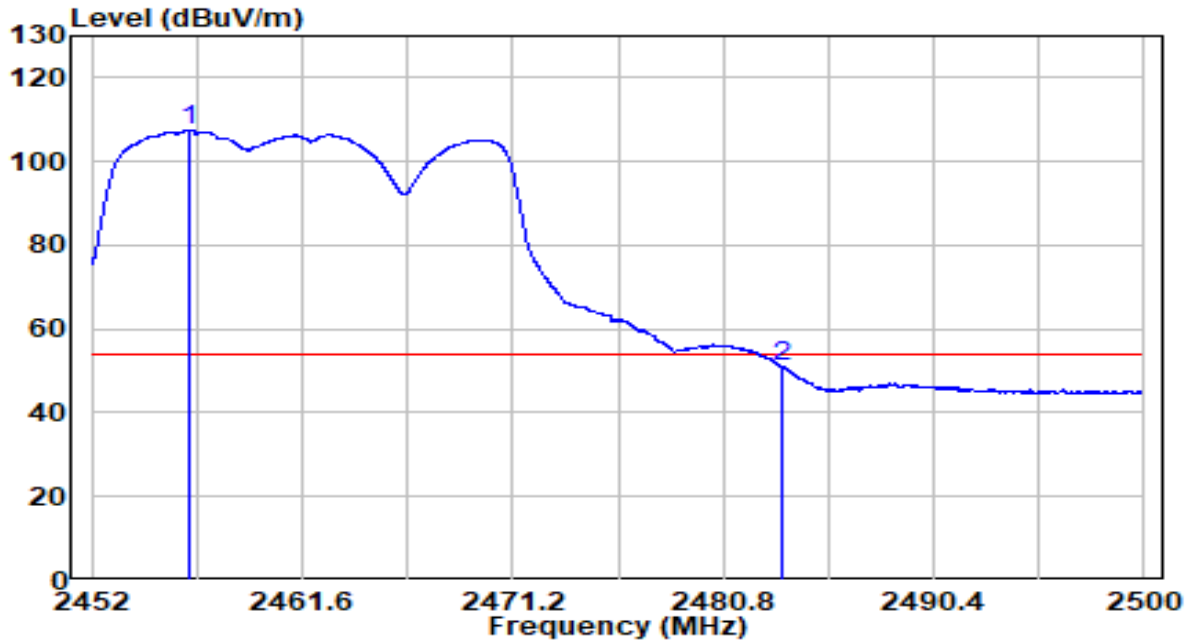


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2456.392	74.82	32.50	107.32	N/A	N/A	Average
2	2483.500	18.44	32.61	51.05	-2.95	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2462MHz	Test Voltage	By PoE

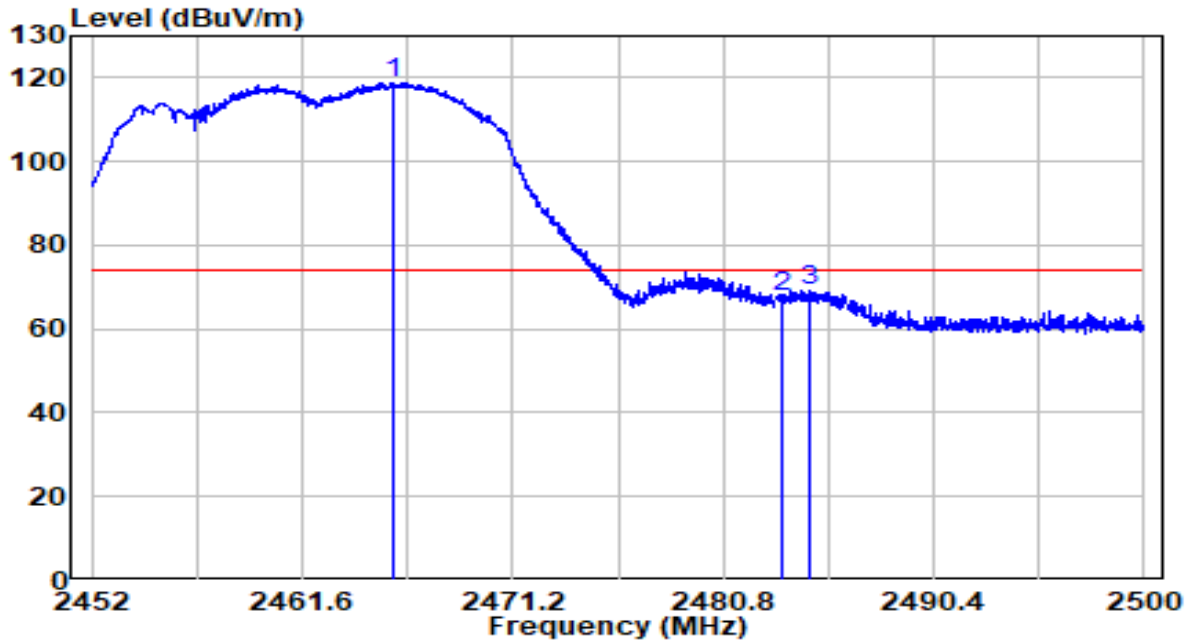


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	86.35	32.54	118.89	N/A	N/A	Peak
2		34.96	32.61	67.57	-6.43	74.00	Peak
3		36.75	32.62	69.37	-4.63	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2462MHz	Test Voltage	By PoE

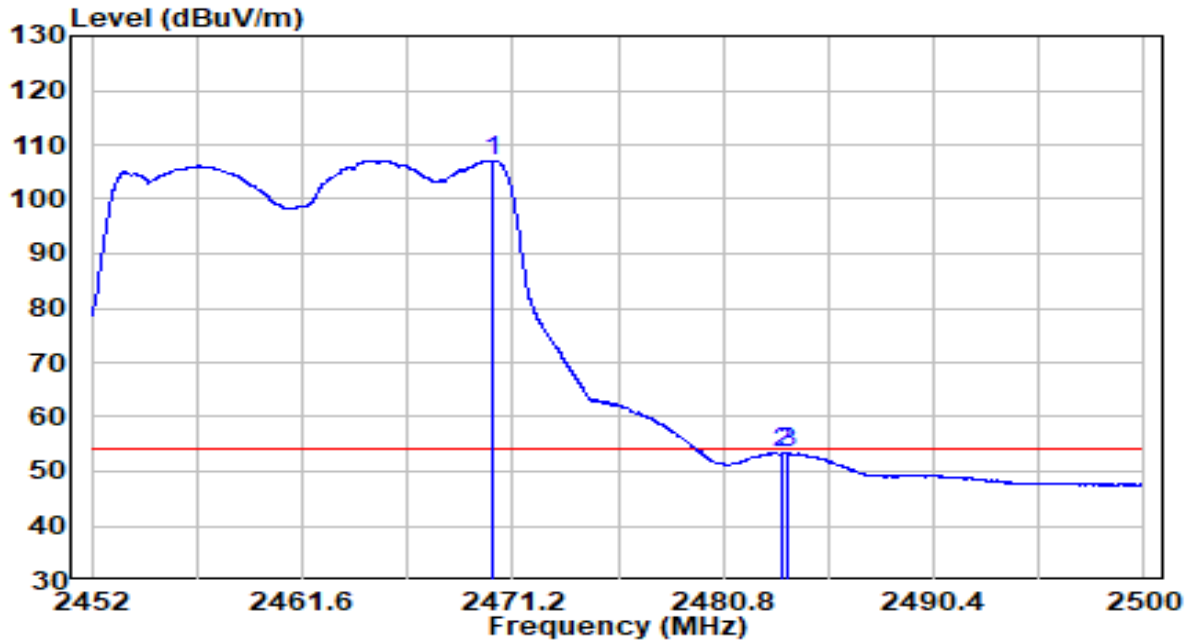


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2470.336	74.54	32.56	107.10	N/A	N/A	Average
2	2483.500	20.62	32.61	53.23	-0.77	54.00	Average
3	2483.728	20.83	32.61	53.45	-0.55	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2422MHz	Test Voltage	By PoE

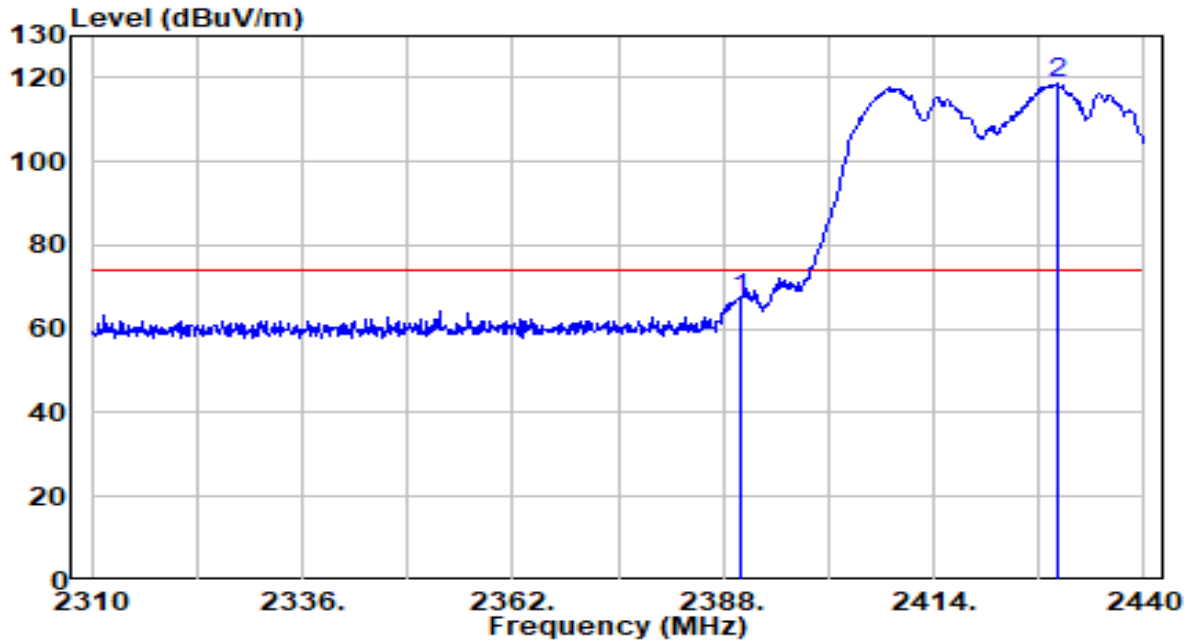


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	35.14	32.22	67.35	-6.65	74.00	Peak
2	* 2429.340	86.22	32.38	118.61	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2422MHz	Test Voltage	By PoE

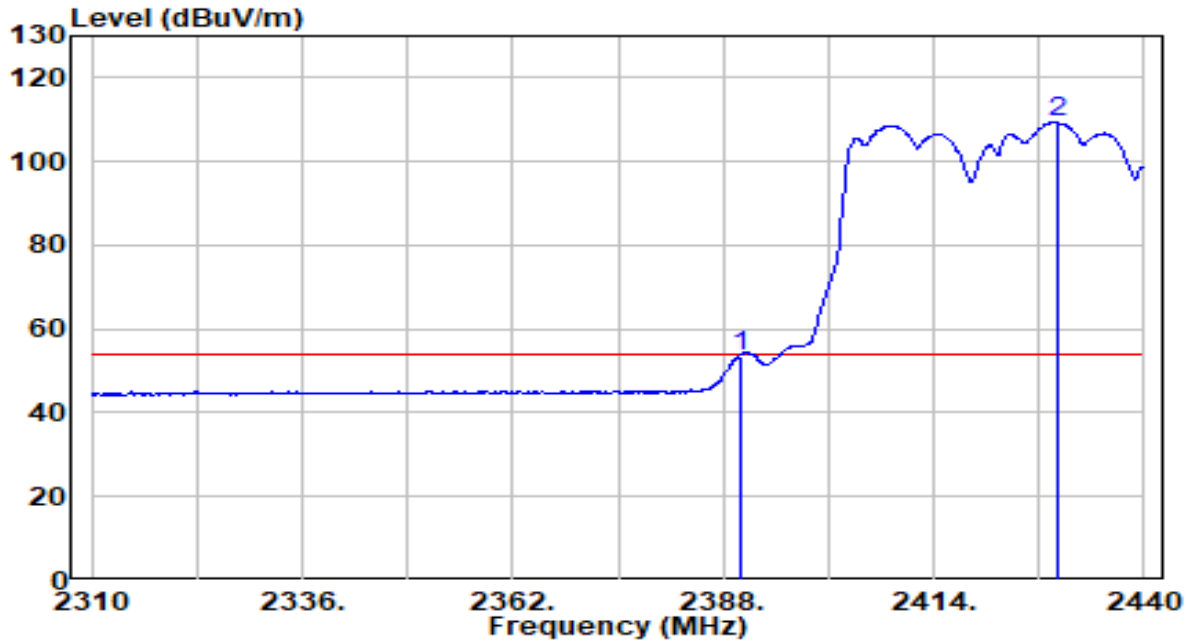


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	21.22	32.22	53.44	-0.56	54.00	Average
2	* 2429.210	77.17	32.38	109.55	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2422MHz	Test Voltage	By PoE

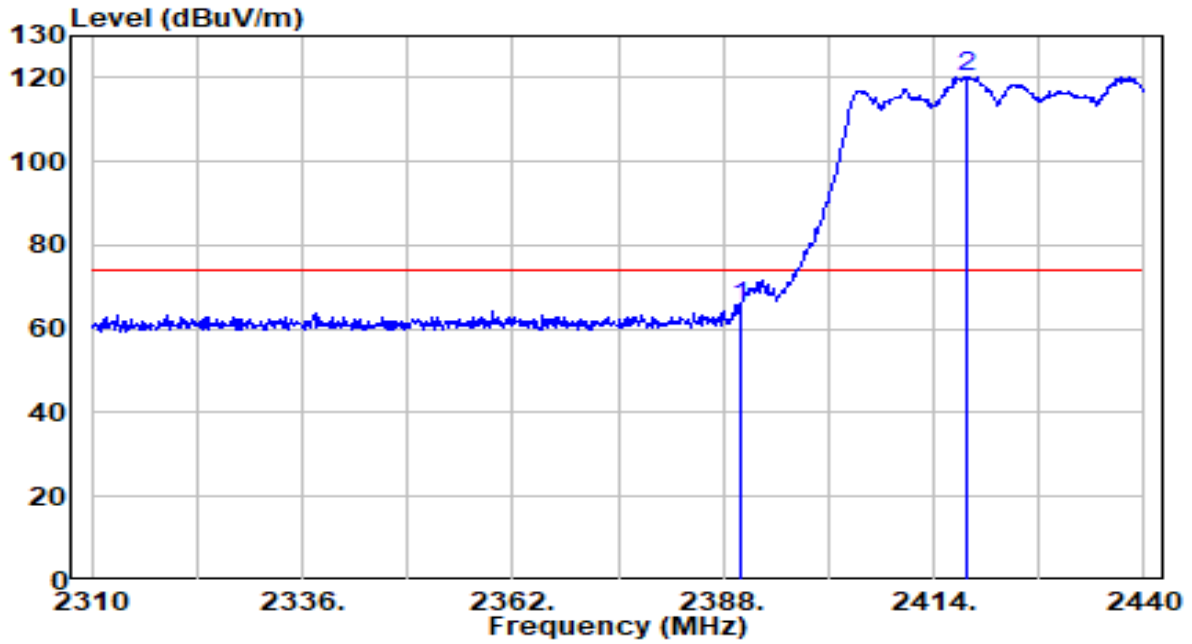


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	32.94	32.22	65.15	-8.85	74.00	Peak
2	* 2418.160	88.06	32.34	120.39	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2422MHz	Test Voltage	By PoE

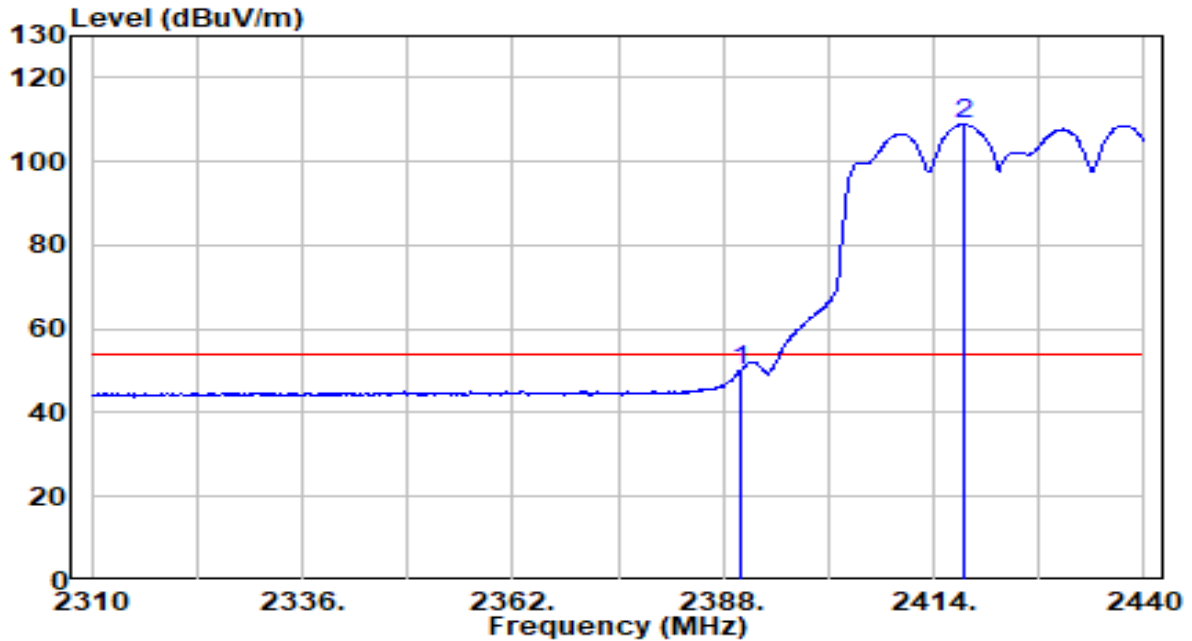


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	17.63	32.22	49.85	-4.15	54.00	Average
2	* 2417.770	76.49	32.33	108.83	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2442MHz	Test Voltage	By PoE

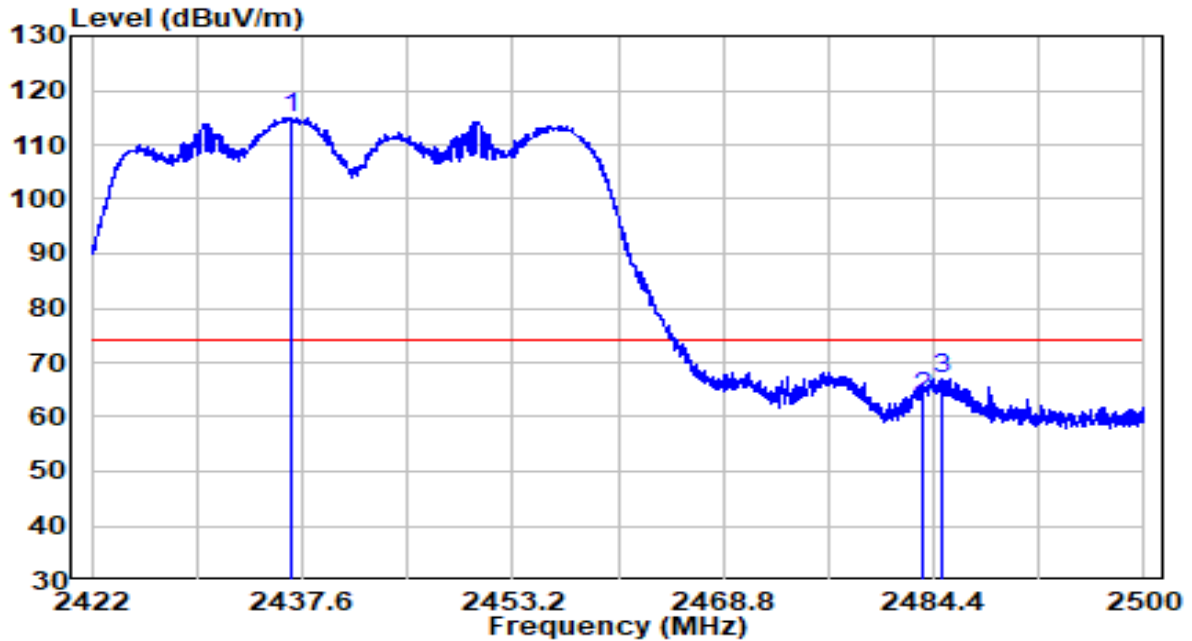


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2436.859	82.56	32.41	114.97	N/A	N/A	Peak
2	2483.500	30.88	32.61	63.49	-10.51	74.00	Peak
3	2484.946	34.40	32.62	67.02	-6.98	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2442MHz	Test Voltage	By PoE

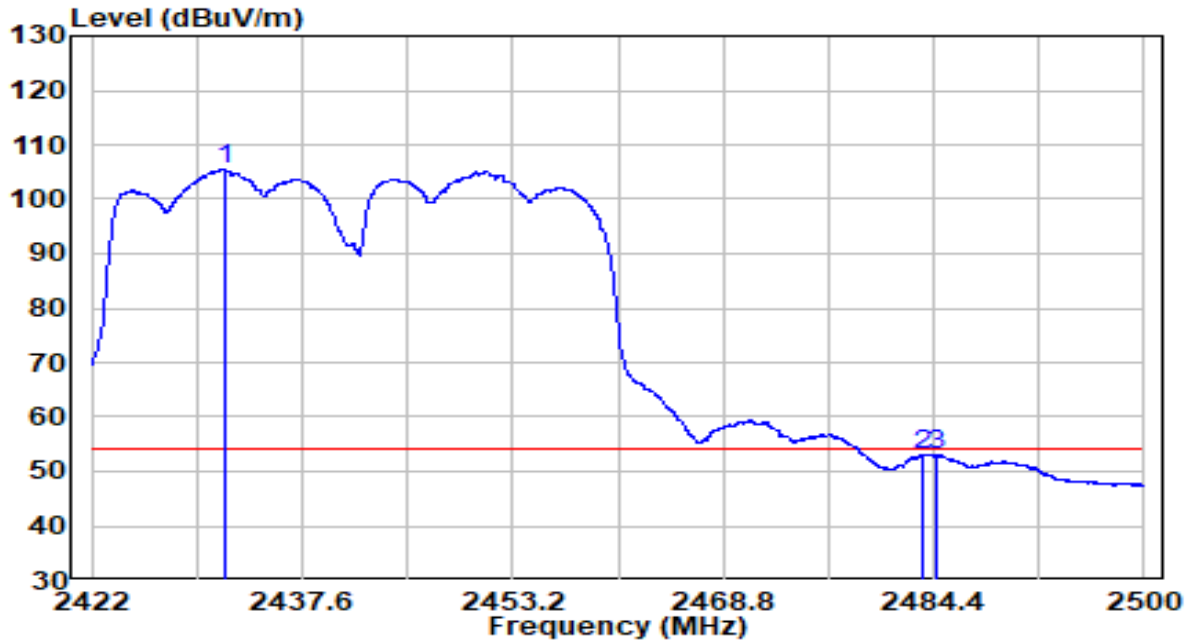


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2431.828	72.99	32.39	105.39	N/A	N/A	Average
2	2483.500	20.41	32.61	53.02	-0.98	54.00	Average
3	2484.673	20.47	32.62	53.09	-0.91	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2442MHz	Test Voltage	By PoE

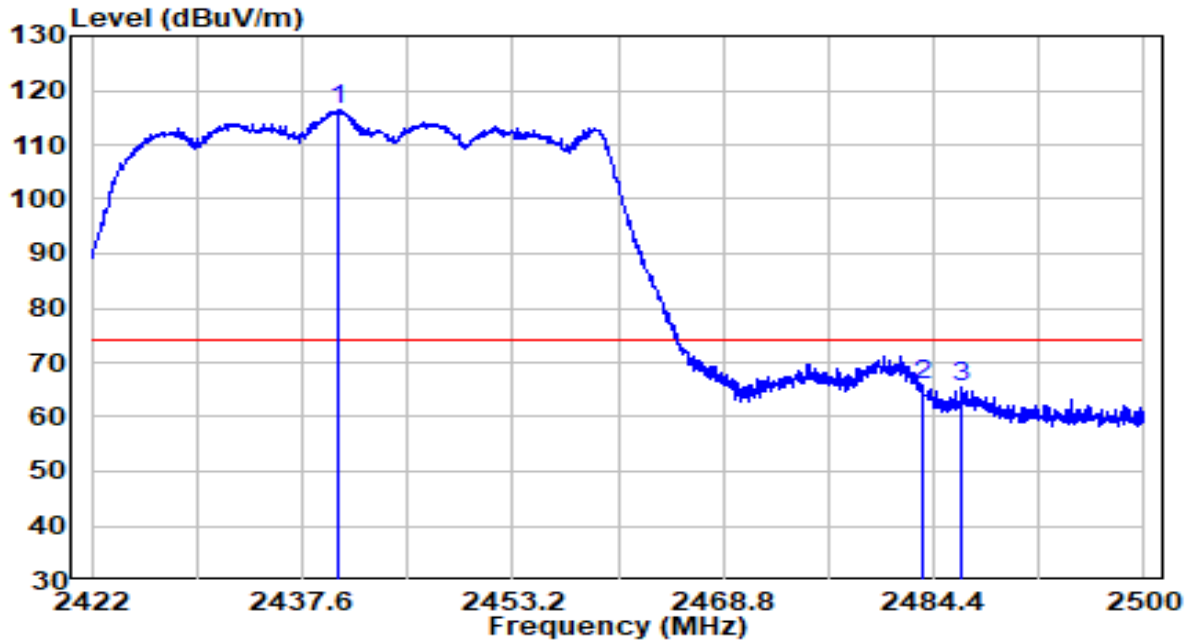


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2440.291	83.85	32.43	116.28	N/A	N/A	Peak
2	2483.500	33.26	32.61	65.87	-8.13	74.00	Peak
3	2486.506	32.77	32.62	65.40	-8.60	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2442MHz	Test Voltage	By PoE

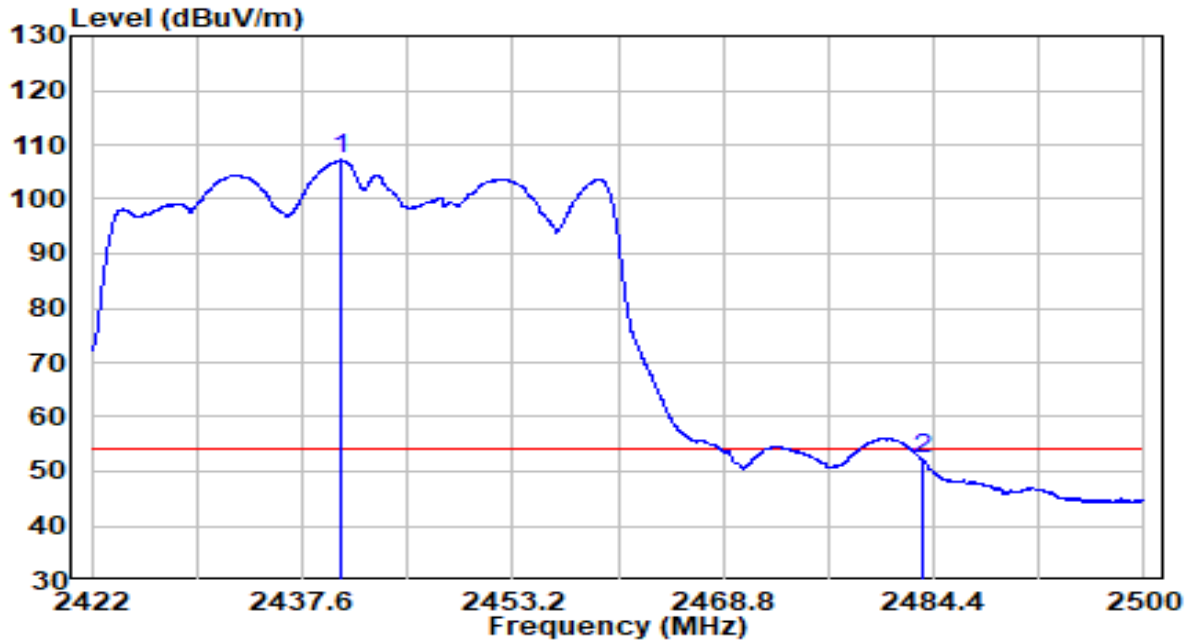


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2440.564	74.74	32.43	107.17	N/A	N/A	Average
2	2483.500	19.61	32.61	52.22	-1.78	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2447MHz	Test Voltage	By PoE

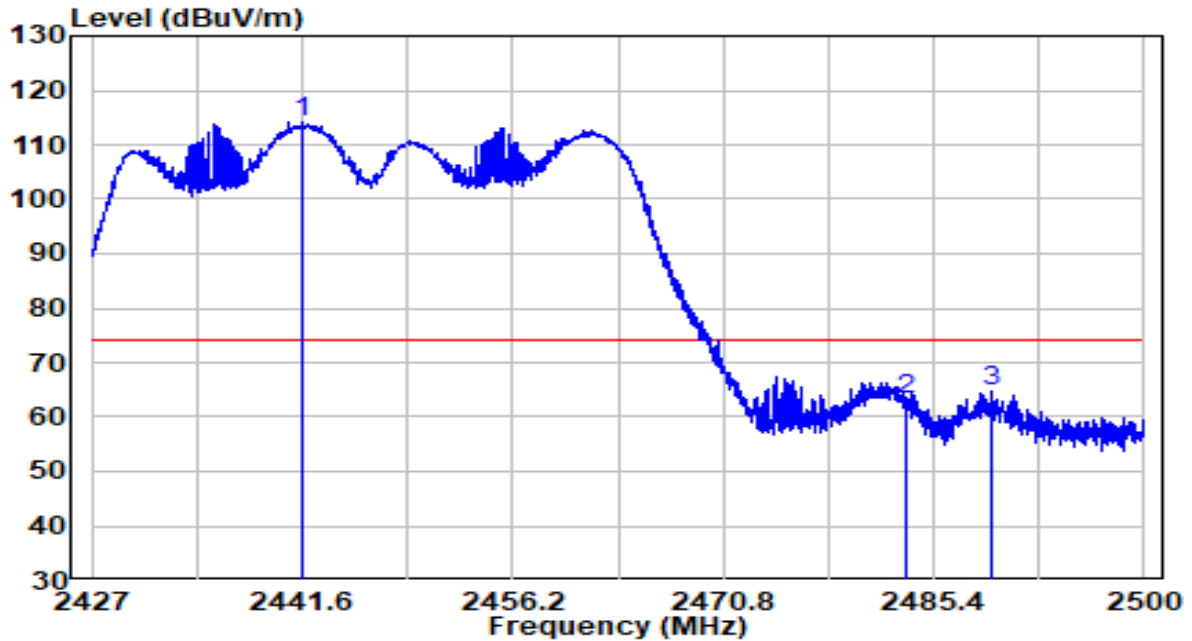


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2441.673	81.90	32.44	114.33	N/A	N/A	Peak
2	2483.500	30.77	32.61	63.38	-10.62	74.00	Peak
3	2489.488	32.20	32.64	64.84	-9.16	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2447MHz	Test Voltage	By PoE

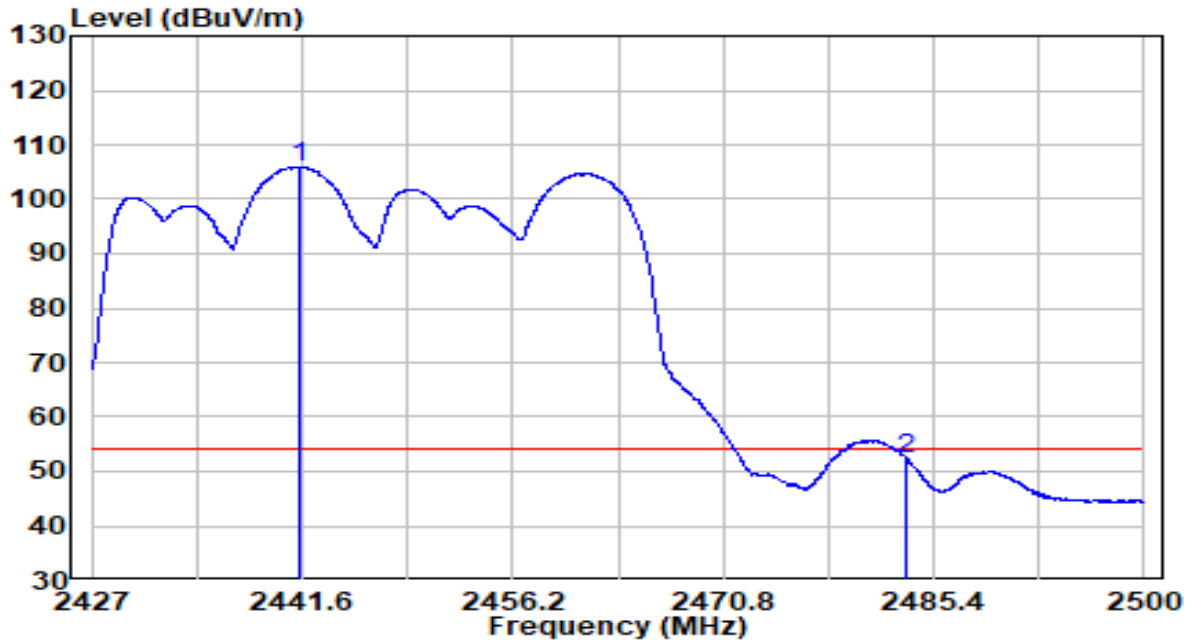


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2441.344	73.41	32.43	105.85	N/A	N/A	Average
2	2483.500	19.81	32.61	52.42	-1.58	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2447MHz	Test Voltage	By PoE

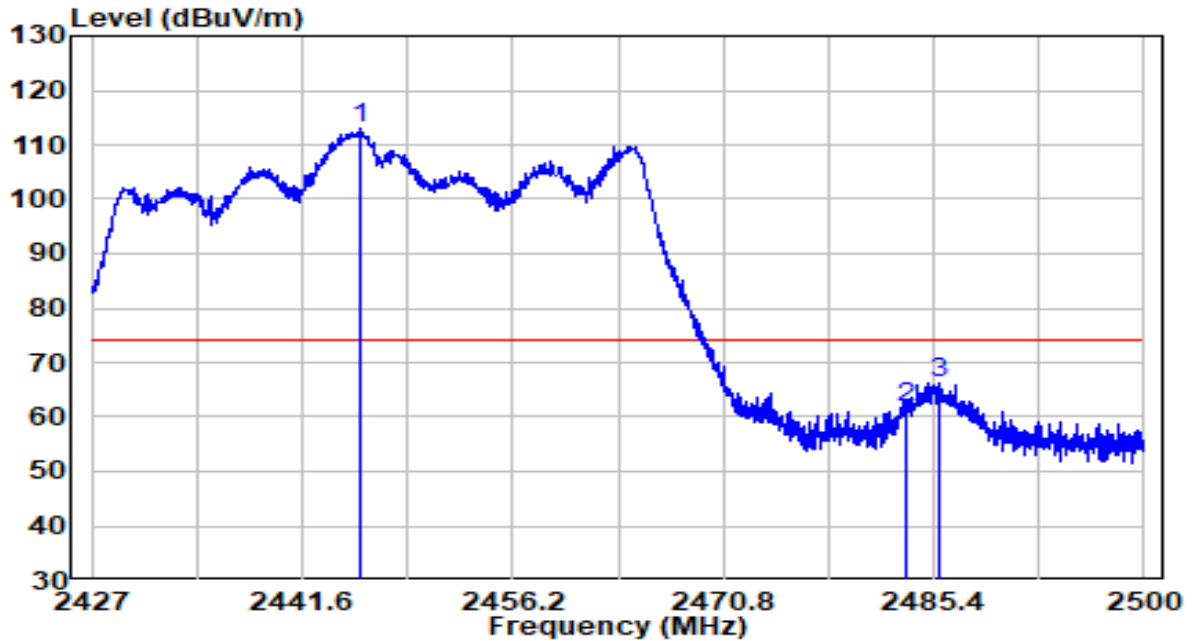


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2445.688	80.45	32.45	112.90	N/A	N/A	Peak
2	2483.500	29.00	32.61	61.61	-12.39	74.00	Peak
3	2485.692	33.57	32.62	66.19	-7.81	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2447MHz	Test Voltage	By PoE

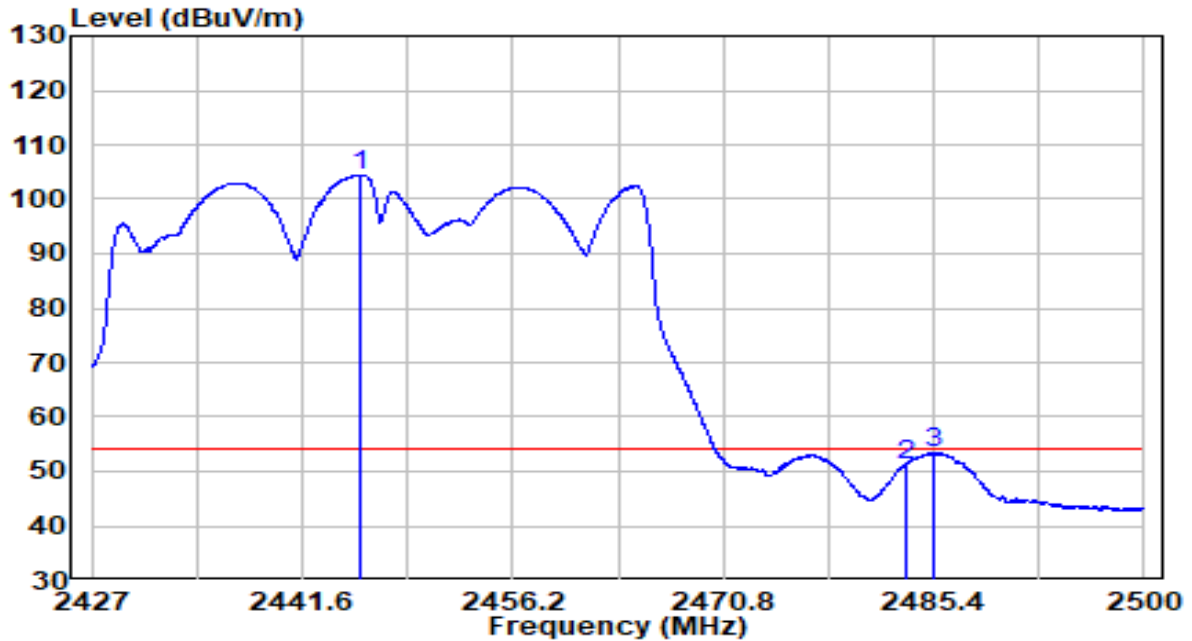


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)	
1	*	2445.652	72.03	32.45	104.49	N/A	N/A	Average
2		2483.500	18.63	32.61	51.24	-2.76	54.00	Average
3		2485.364	20.81	32.62	53.43	-0.57	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	H24.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2452MHz	Test Voltage	By PoE

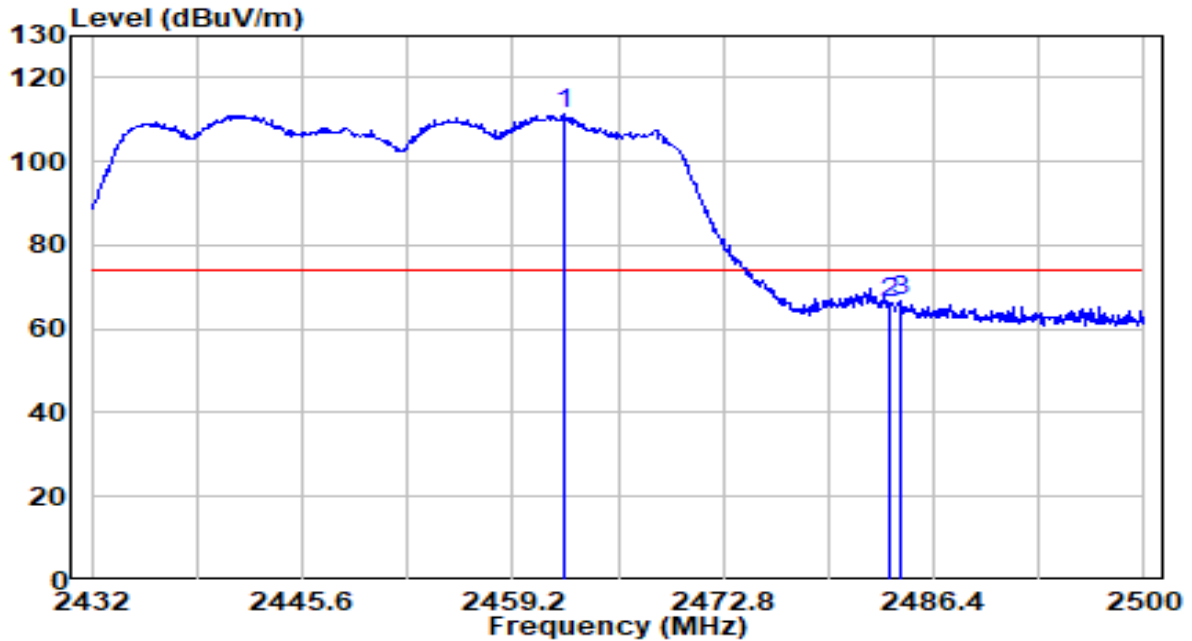


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2462.600	78.81	32.52	111.34	N/A	N/A	Peak
2	2483.500	33.81	32.61	66.42	-7.58	74.00	Peak
3	2484.224	34.16	32.61	66.78	-7.22	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	AP58X	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2452MHz	Test Voltage	By PoE

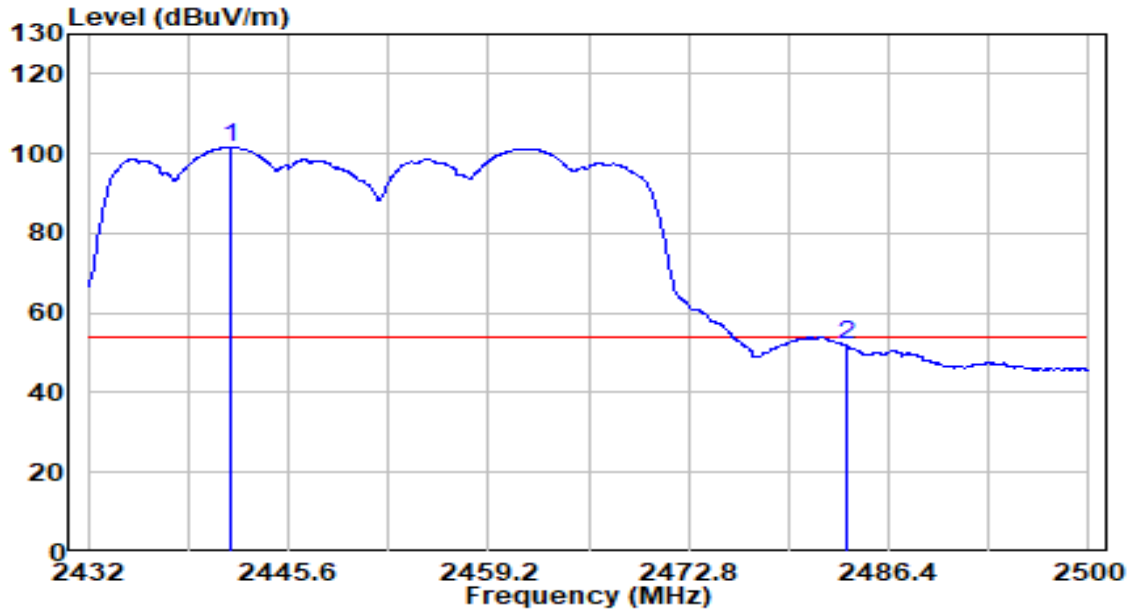


No	Frequency (MHz)	Reading (dBµV)	C.F (dB/m)	Measurement (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Remark (QP/PK/AV)
1	* 2441.724	69.11	32.44	101.54	N/A	N/A	Average
2	2483.500	19.34	32.61	51.95	-2.05	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBµV/m) = Reading(dBµV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2452MHz	Test Voltage	By PoE

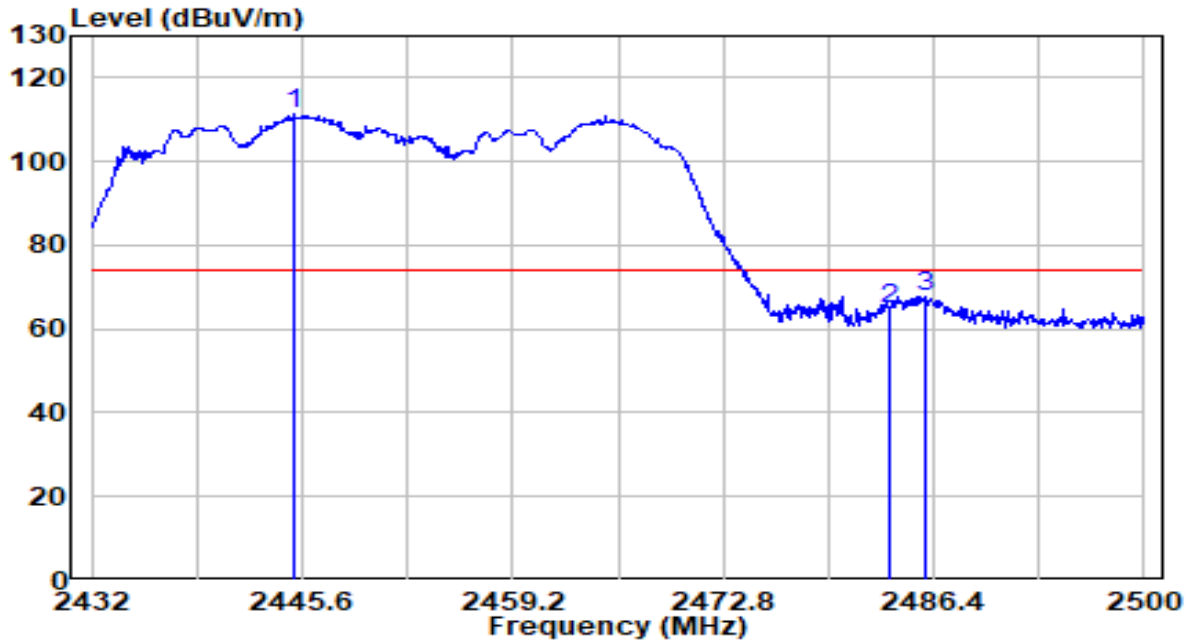


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2445.056	78.72	32.45	111.17	N/A	N/A	Peak
2	2483.500	32.04	32.61	64.65	-9.35	74.00	Peak
3	2485.856	35.23	32.62	67.85	-6.15	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2452MHz	Test Voltage	By PoE

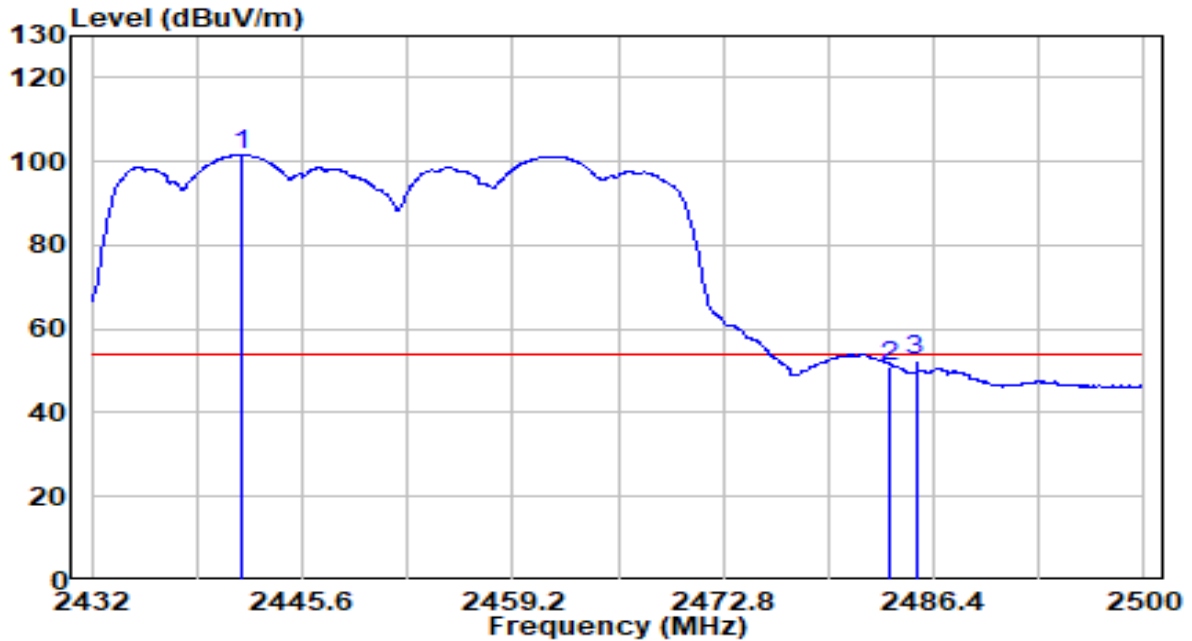


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2441.724	69.11	32.44	101.54	N/A	N/A	Average
2	2483.500	18.28	32.61	50.89	-3.11	54.00	Average
3	2485.244	20.01	32.62	52.63	-1.37	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz	Test Voltage	By PoE

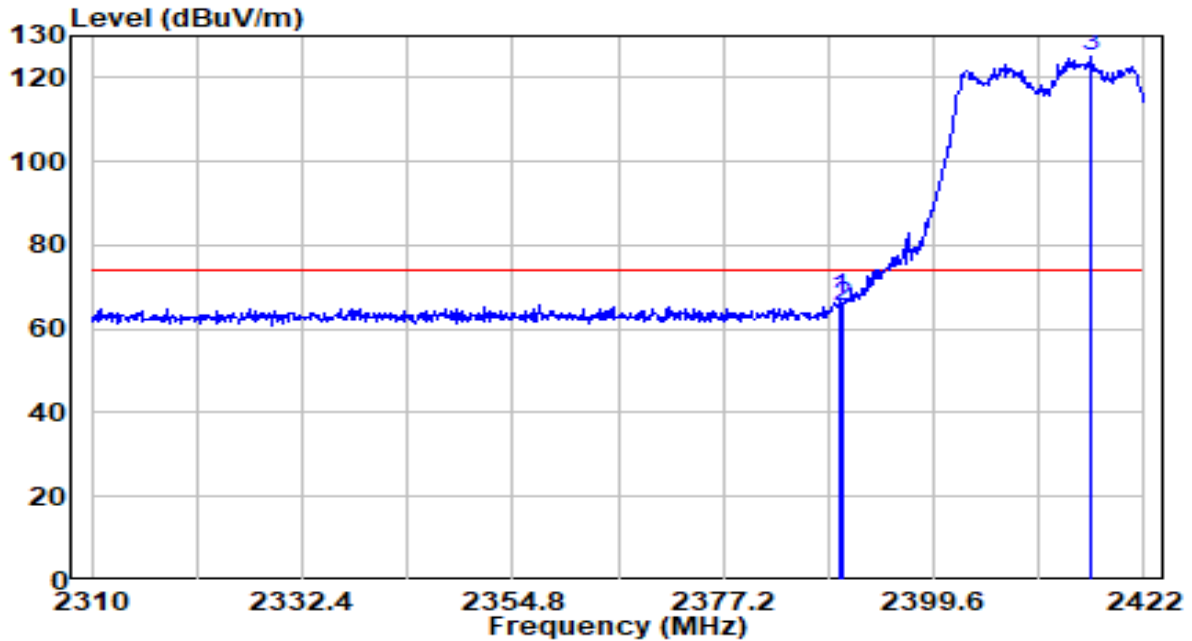


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2389.632	34.79	32.22	67.01	-6.99	74.00	Peak
2	2390.000	32.90	32.22	65.12	-8.88	74.00	Peak
3	* 2416.288	92.74	32.33	125.07	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz	Test Voltage	By PoE

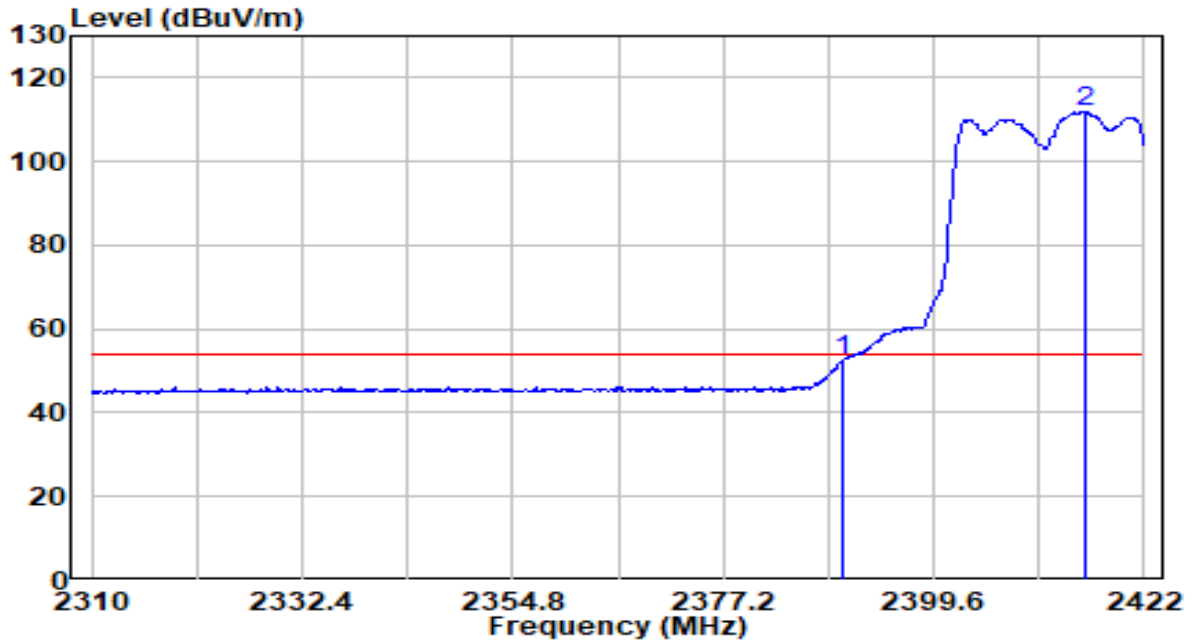


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	20.51	32.22	52.73	-1.27	54.00	Average
2	* 2415.616	79.75	32.33	112.08	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz	Test Voltage	By PoE

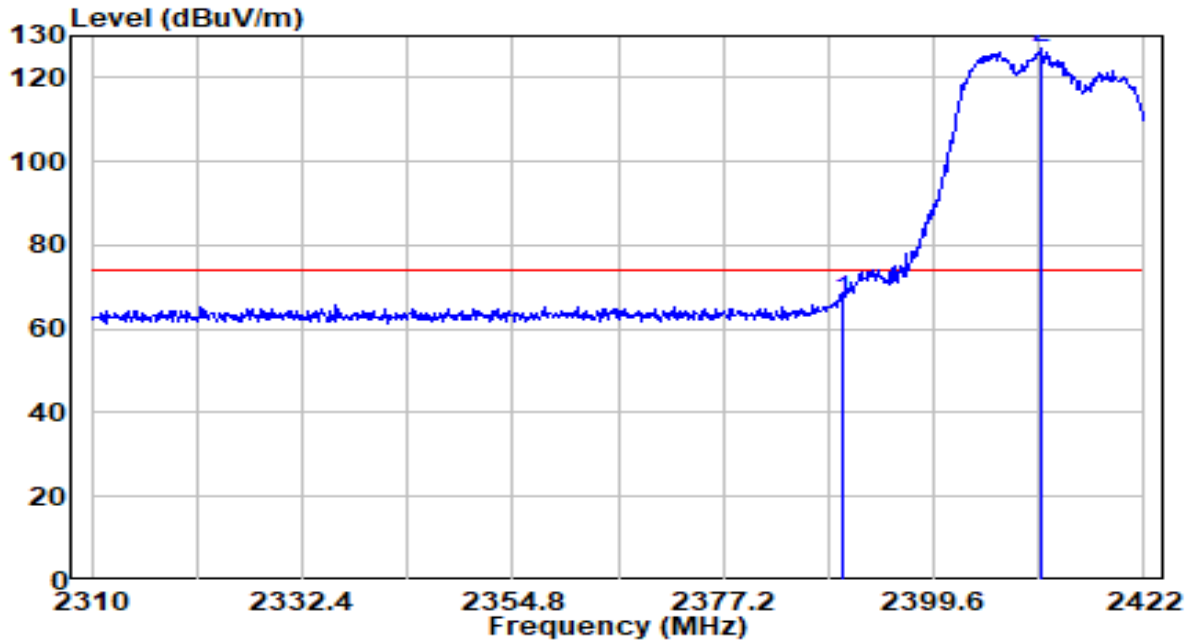


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	34.60	32.22	66.82	-7.18	74.00	Peak
2	* 2411.024	94.94	32.31	127.25	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz	Test Voltage	By PoE

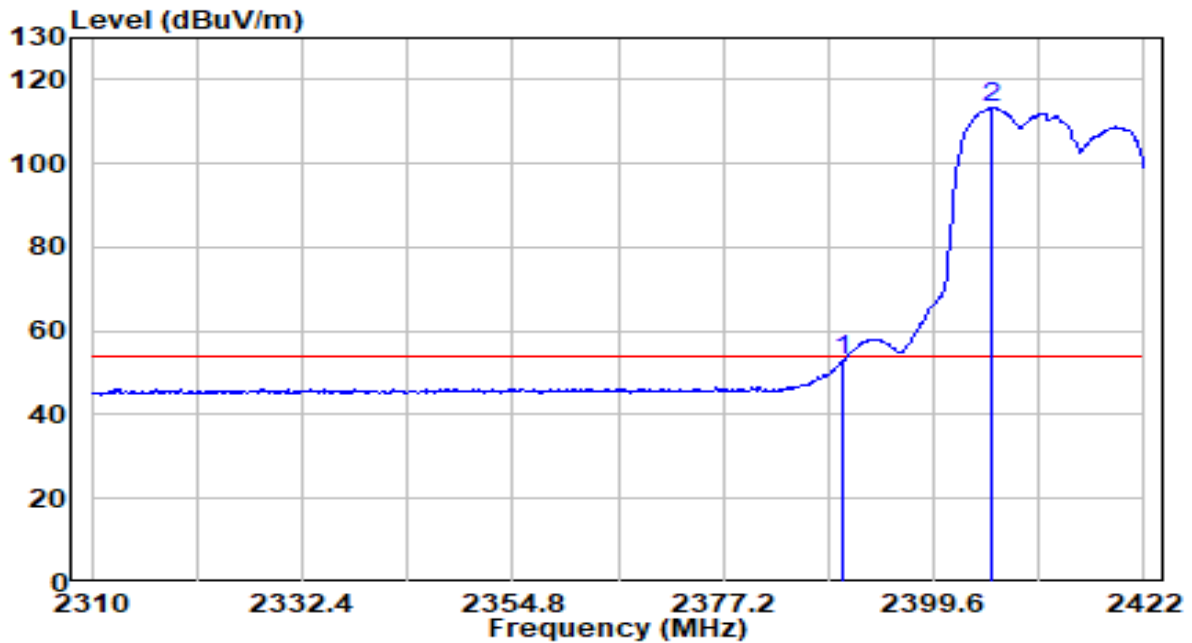


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	20.71	32.22	52.93	-1.07	54.00	Average
2	* 2405.872	80.94	32.28	113.23	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2452MHz	Test Voltage	By PoE

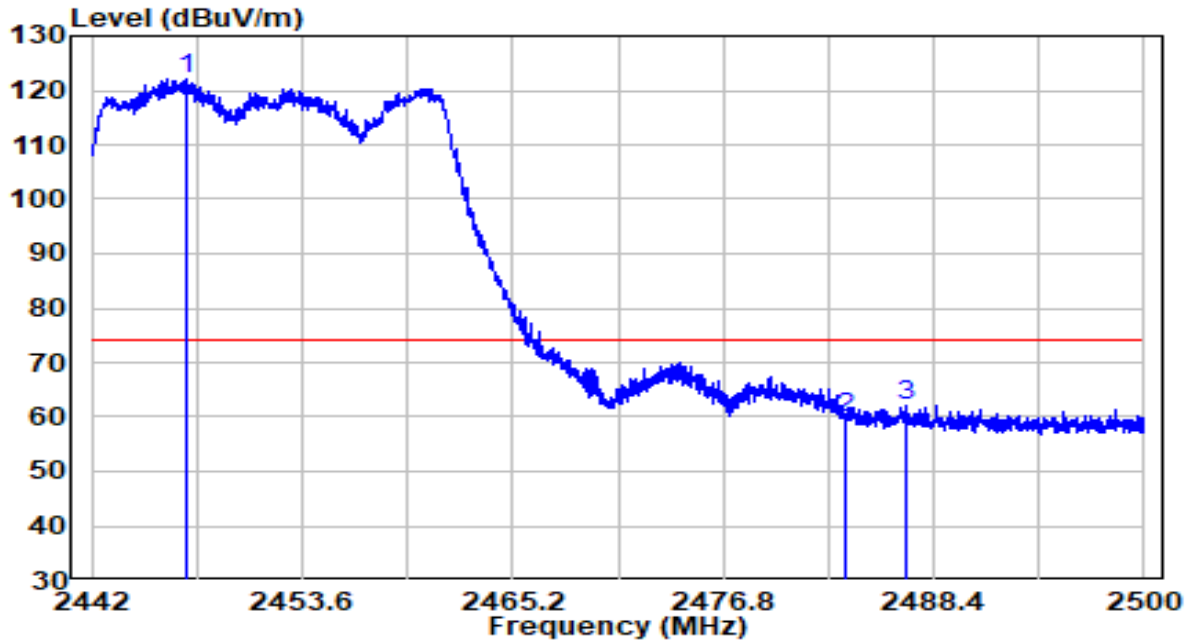


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2447.220	89.65	32.46	122.11	N/A	N/A	Peak
2	2483.500	27.15	32.61	59.77	-14.23	74.00	Peak
3	2486.950	29.40	32.63	62.02	-11.98	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2452MHz	Test Voltage	By PoE

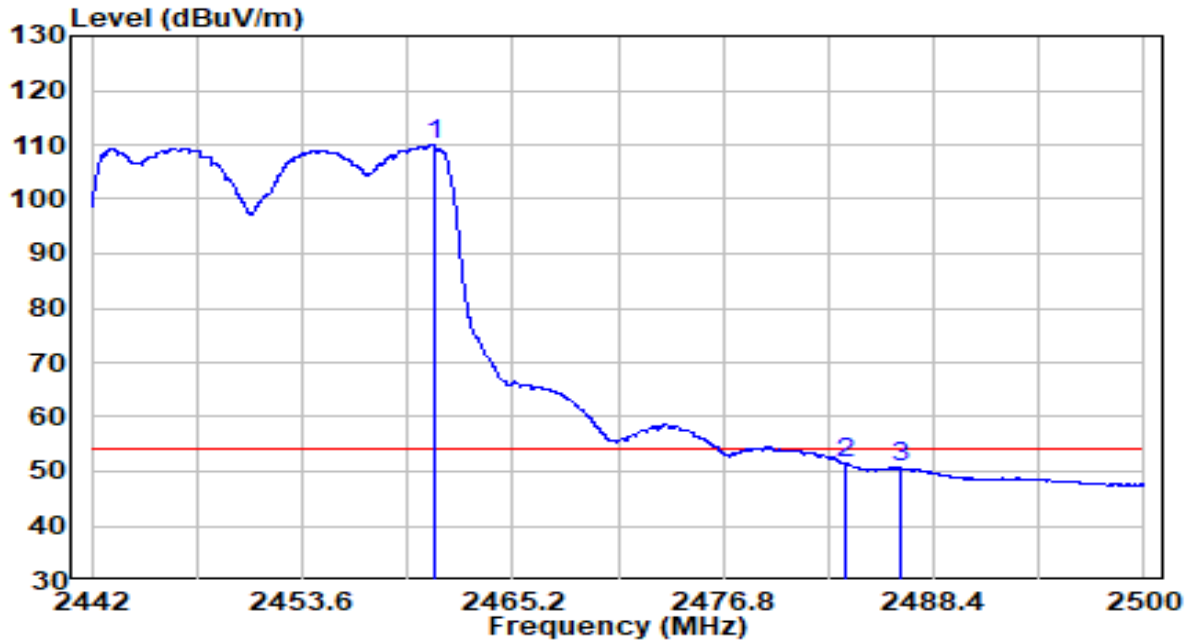


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	77.48	32.52	110.00	N/A	N/A	Average
2		18.84	32.61	51.45	-2.55	54.00	Average
3		18.07	32.62	50.69	-3.31	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2452MHz	Test Voltage	By PoE

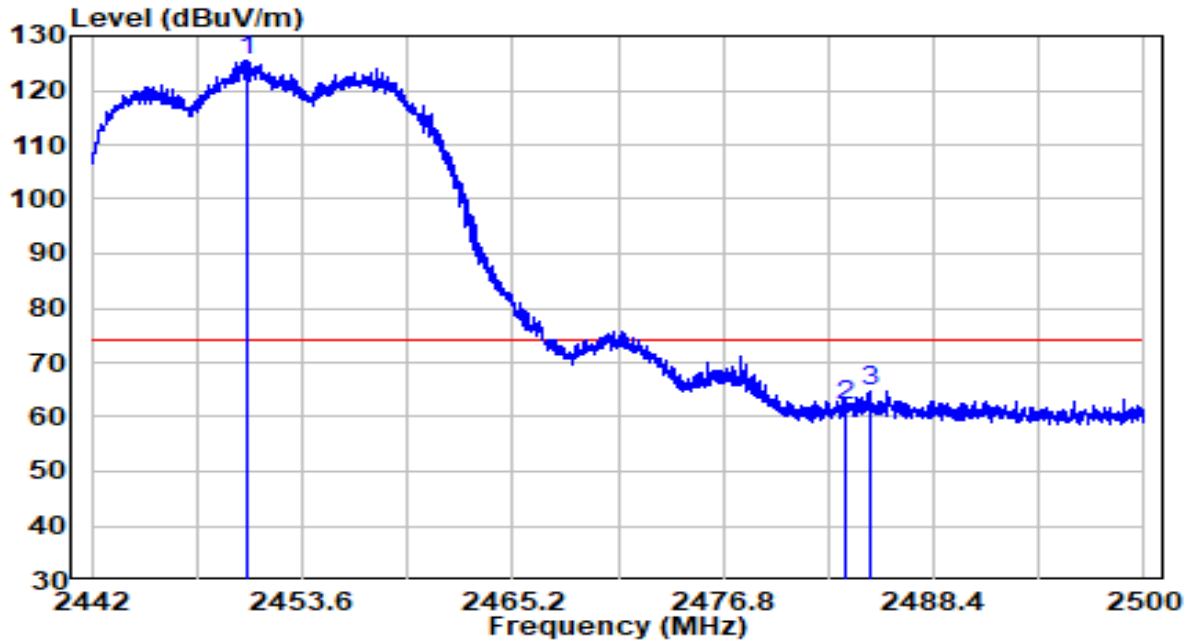


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	92.93	32.47	125.41	N/A	N/A	Peak
2	2483.500	29.46	32.61	62.07	-11.93	74.00	Peak
3	2484.862	32.22	32.62	64.84	-9.16	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2452MHz	Test Voltage	By PoE

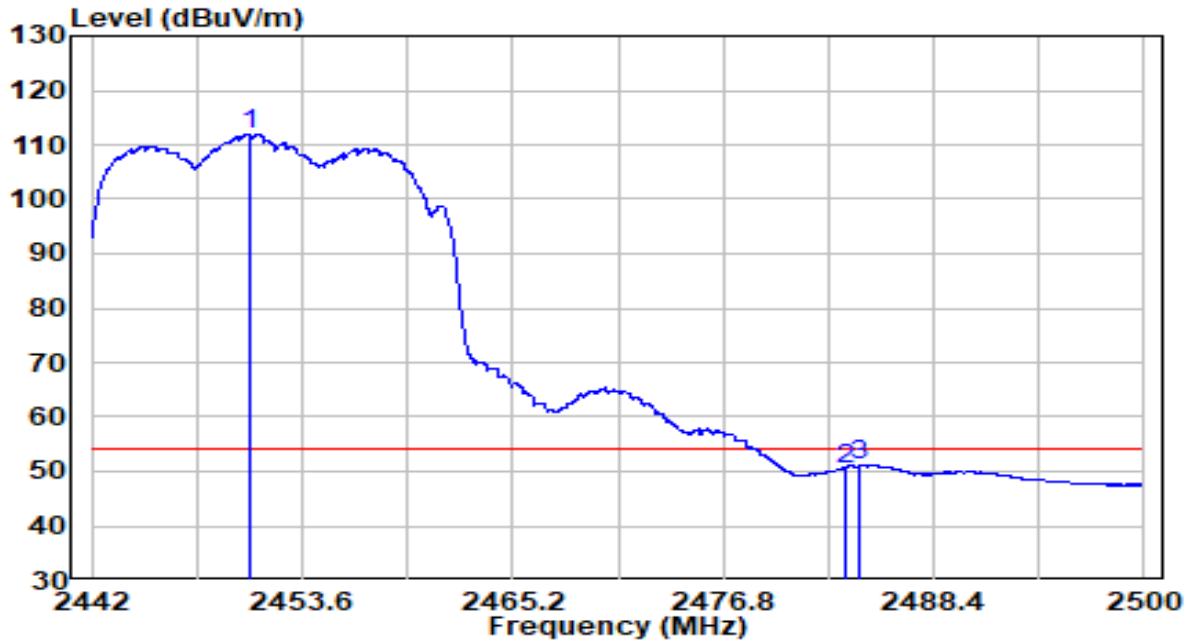


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2450.700	79.51	32.47	111.98	N/A	N/A	Average
2	2483.500	17.86	32.61	50.47	-3.53	54.00	Average
3	2484.369	18.64	32.61	51.25	-2.75	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2457MHz	Test Voltage	By PoE

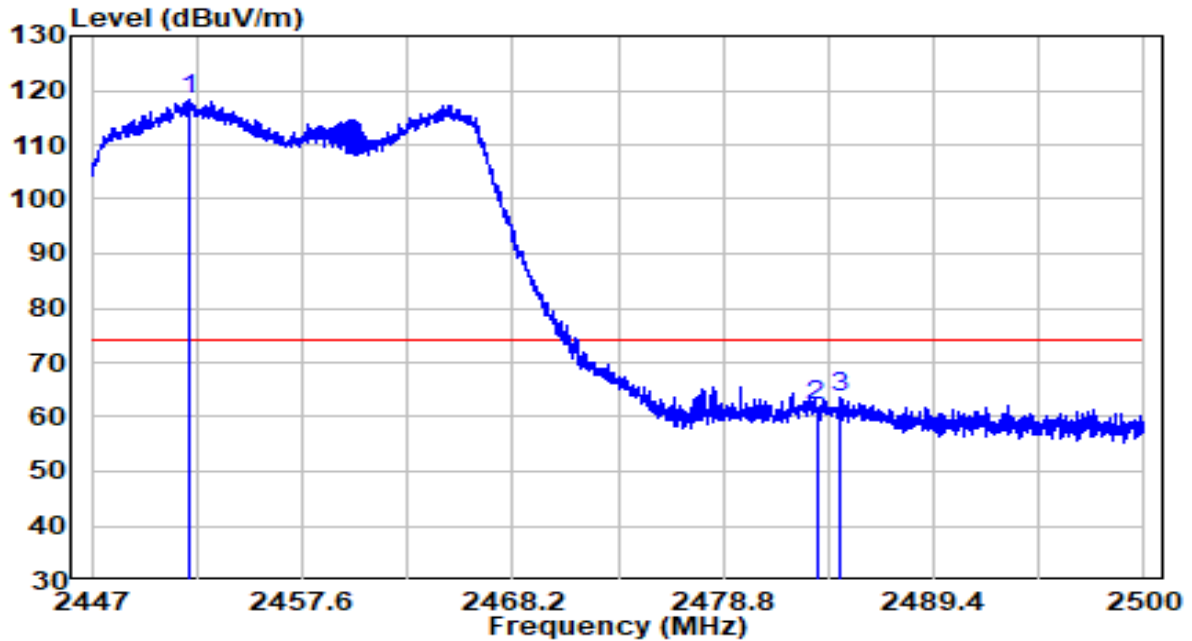


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2451.903	85.87	32.48	118.35	N/A	N/A	Peak
2	2483.500	29.40	32.61	62.01	-11.99	74.00	Peak
3	2484.683	30.91	32.62	63.52	-10.48	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2457MHz	Test Voltage	By PoE

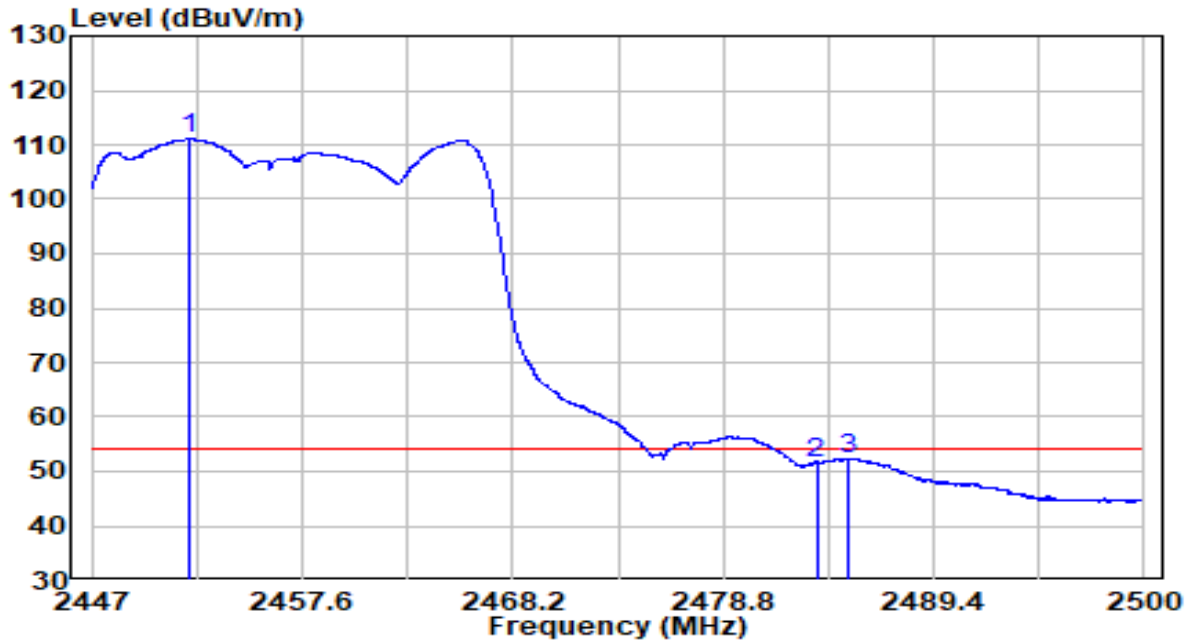


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2451.903	78.53	32.48	111.01	N/A	N/A	Average
2	2483.500	19.04	32.61	51.65	-2.35	54.00	Average
3	2485.134	19.71	32.62	52.32	-1.68	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2457MHz	Test Voltage	By PoE

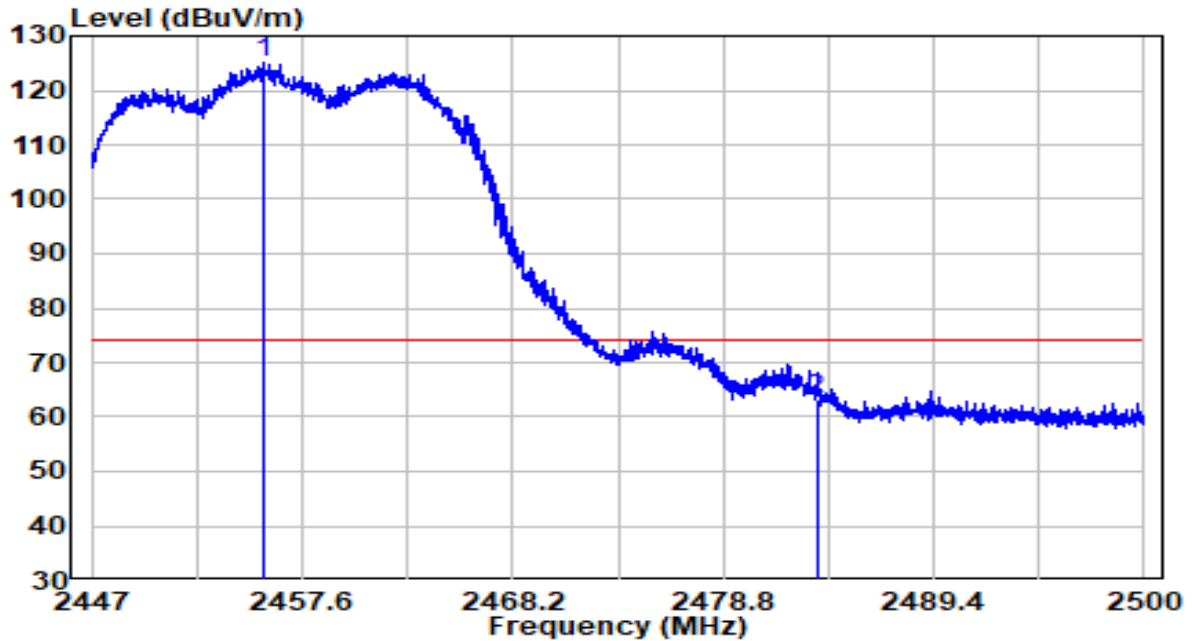


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	92.66	32.49	125.16	N/A	N/A	Peak
2		30.42	32.61	63.03	-10.97	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2457MHz	Test Voltage	By PoE

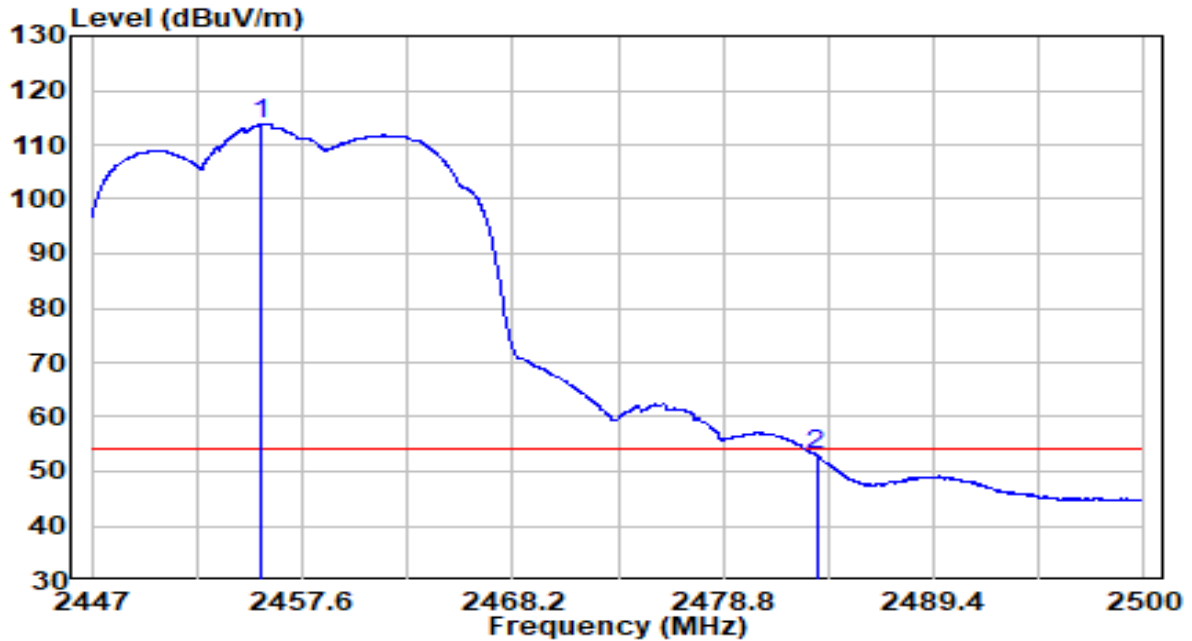


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2455.533	81.24	32.49	113.73	N/A	N/A	Average
2	2483.500	20.36	32.61	52.97	-1.03	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz	Test Voltage	By PoE

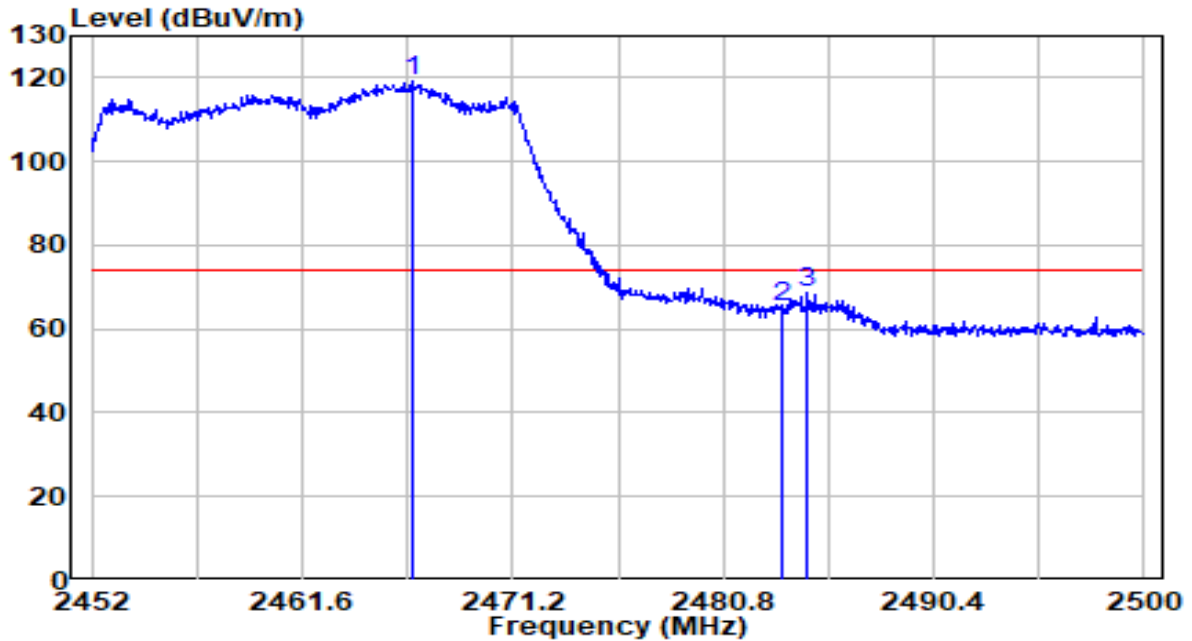


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	86.52	32.54	119.06	N/A	N/A	Peak
2		32.47	32.61	65.08	-8.92	74.00	Peak
3		36.14	32.62	68.75	-5.25	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz	Test Voltage	By PoE

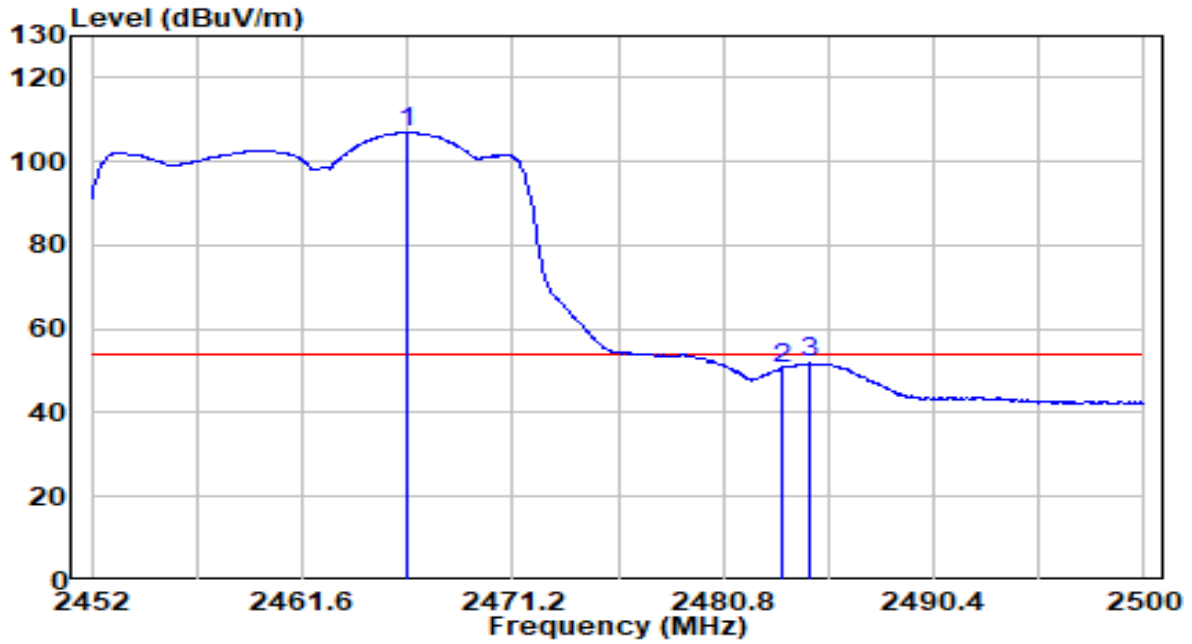


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	74.33	32.54	106.87	N/A	N/A	Average
2		18.08	32.61	50.69	-3.31	54.00	Average
3		19.21	32.62	51.83	-2.17	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz	Test Voltage	By PoE

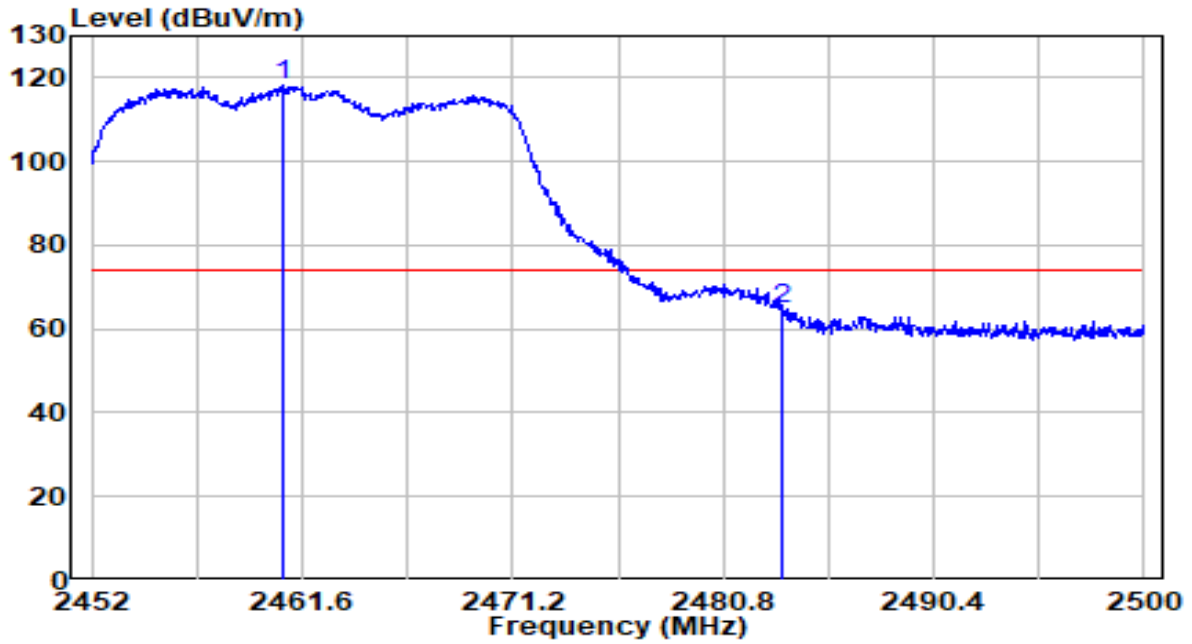


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	*	85.57	32.51	118.08	N/A	N/A	Peak
2		32.03	32.61	64.64	-9.36	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz	Test Voltage	By PoE

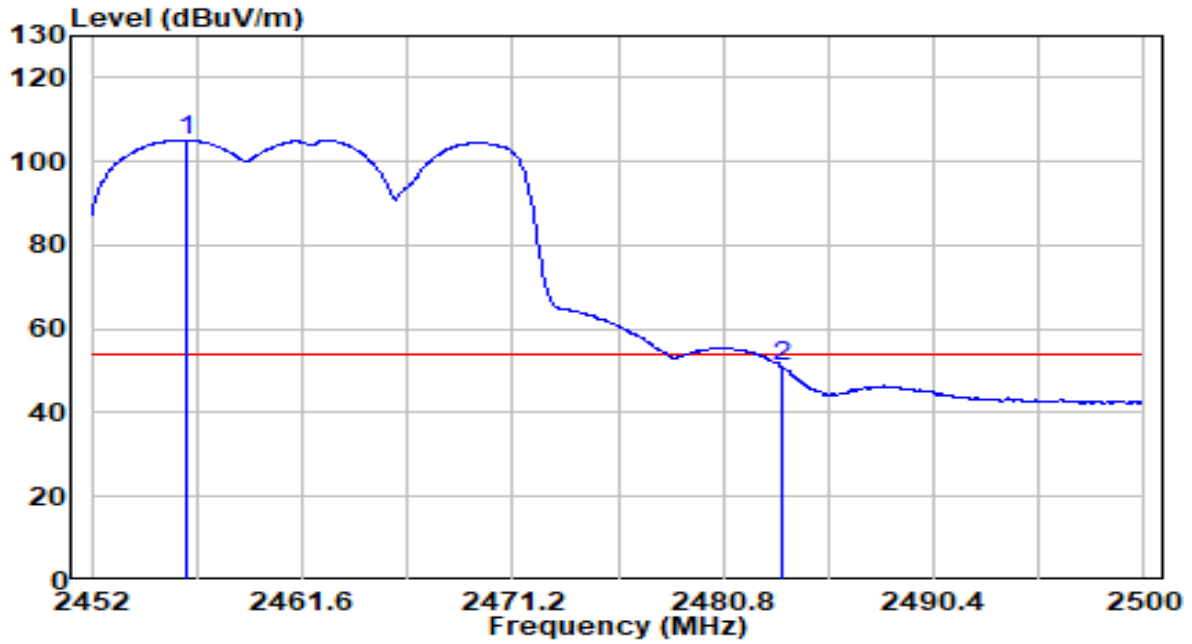


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2456.368	72.64	32.50	105.14	N/A	N/A	Average
2	2483.500	18.23	32.61	50.85	-3.15	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	By PoE

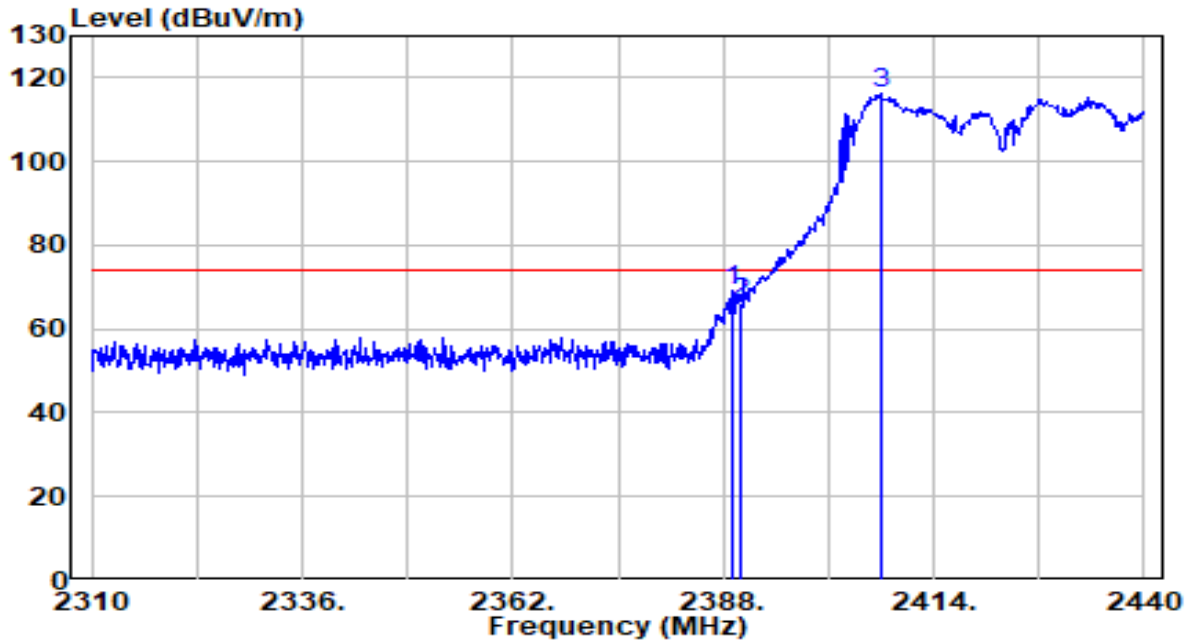


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.300	36.71	32.22	68.93	-5.08	74.00	Peak
2	2390.000	34.02	32.22	66.24	-7.76	74.00	Peak
3	* 2407.370	83.98	32.29	116.27	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	By PoE

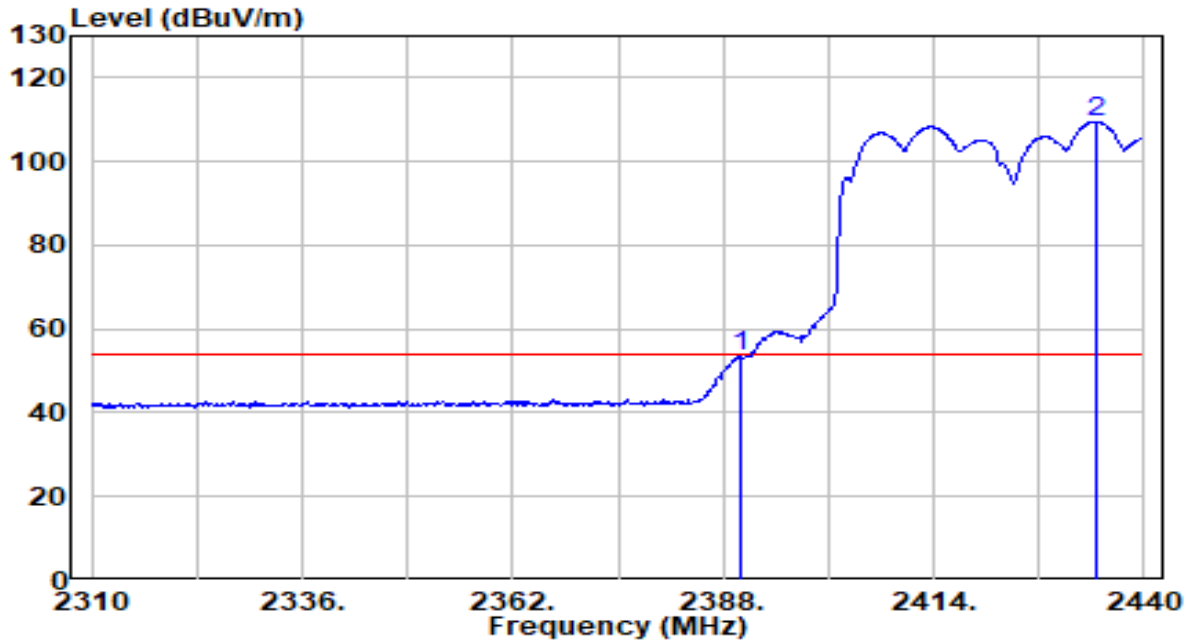


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	21.08	32.22	53.29	-0.71	54.00	Average
2	* 2434.020	77.22	32.40	109.62	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	By PoE

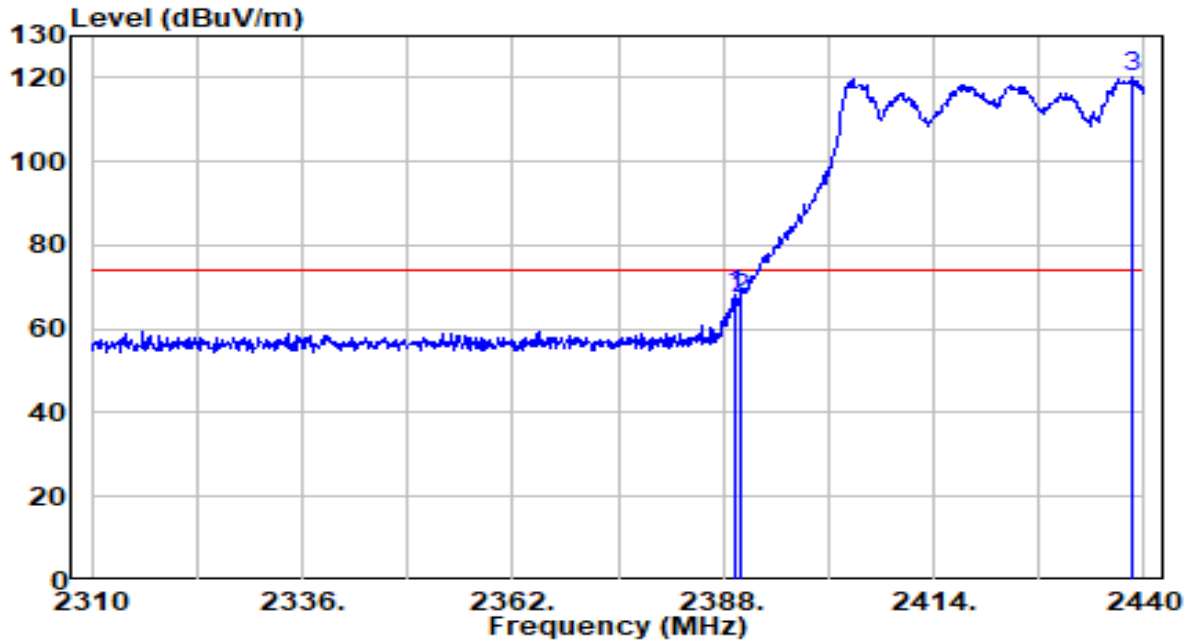


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.560	36.10	32.22	68.31	-5.69	74.00	Peak
2	2390.000	35.07	32.22	67.29	-6.71	74.00	Peak
3	* 2438.570	87.93	32.42	120.35	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-03
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.2°C/49.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	By PoE

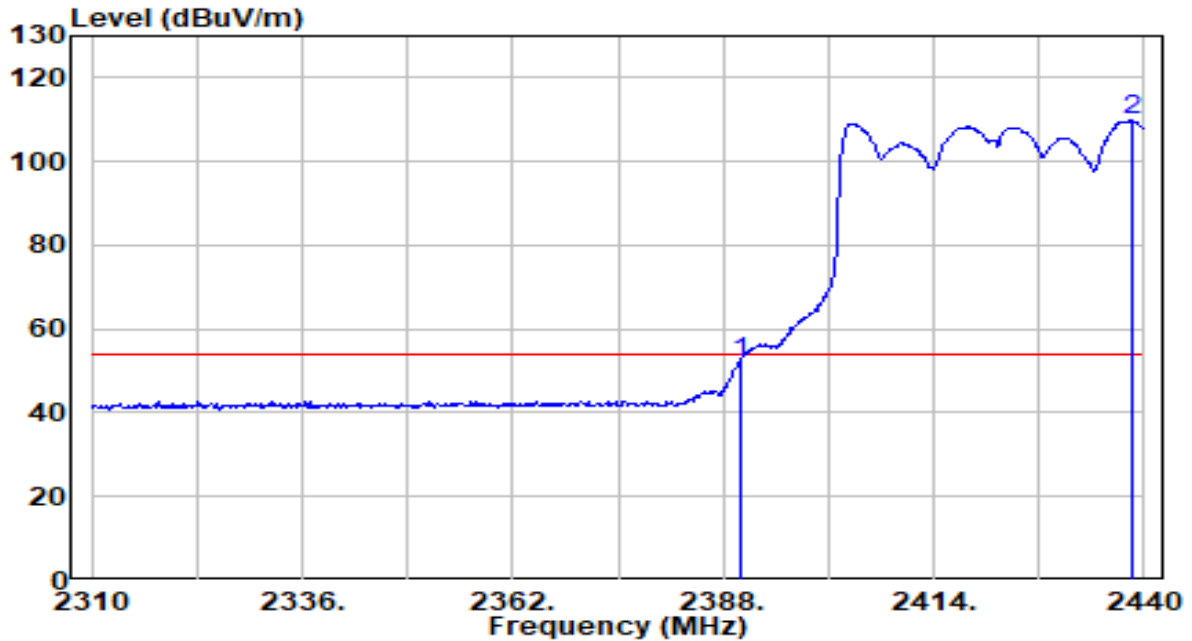


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	19.85	32.22	52.07	-1.93	54.00	Average
2	* 2438.440	77.37	32.42	109.79	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)..
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2442MHz	Test Voltage	By PoE

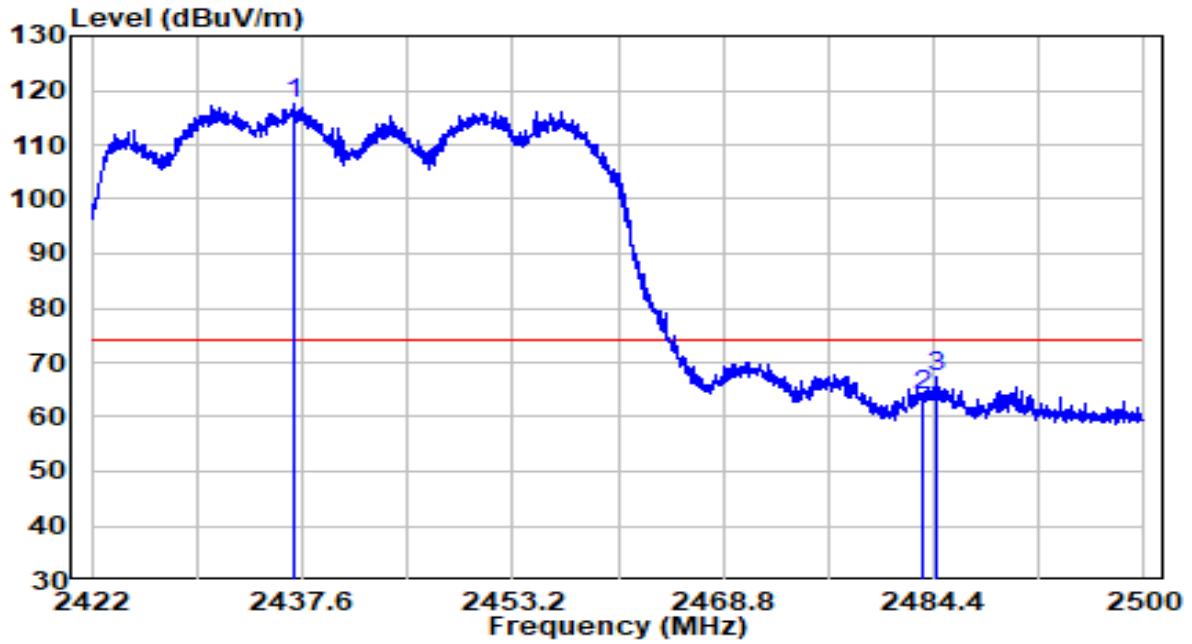


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2436.898	84.98	32.41	117.39	N/A	N/A	Peak
2	2483.500	31.40	32.61	64.01	-9.99	74.00	Peak
3	2484.517	34.64	32.61	67.26	-6.74	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2442MHz	Test Voltage	By PoE

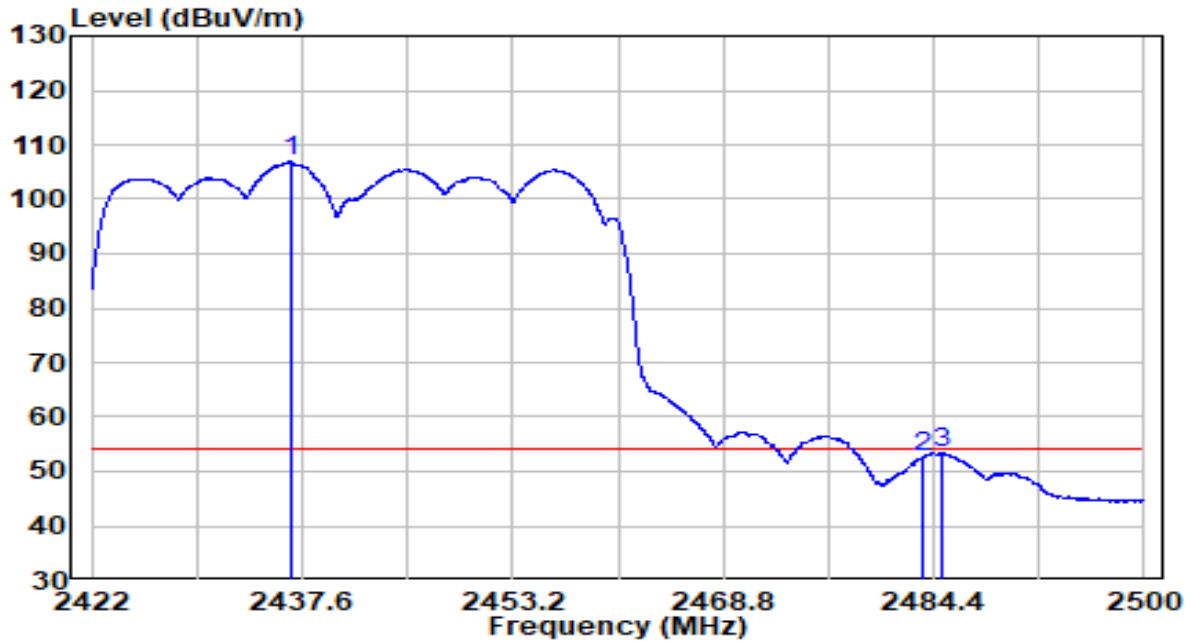


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2436.742	74.41	32.41	106.83	N/A	N/A	Average
2	2483.500	19.89	32.61	52.50	-1.50	54.00	Average
3	2485.024	20.80	32.62	53.42	-0.58	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2442MHz	Test Voltage	By PoE

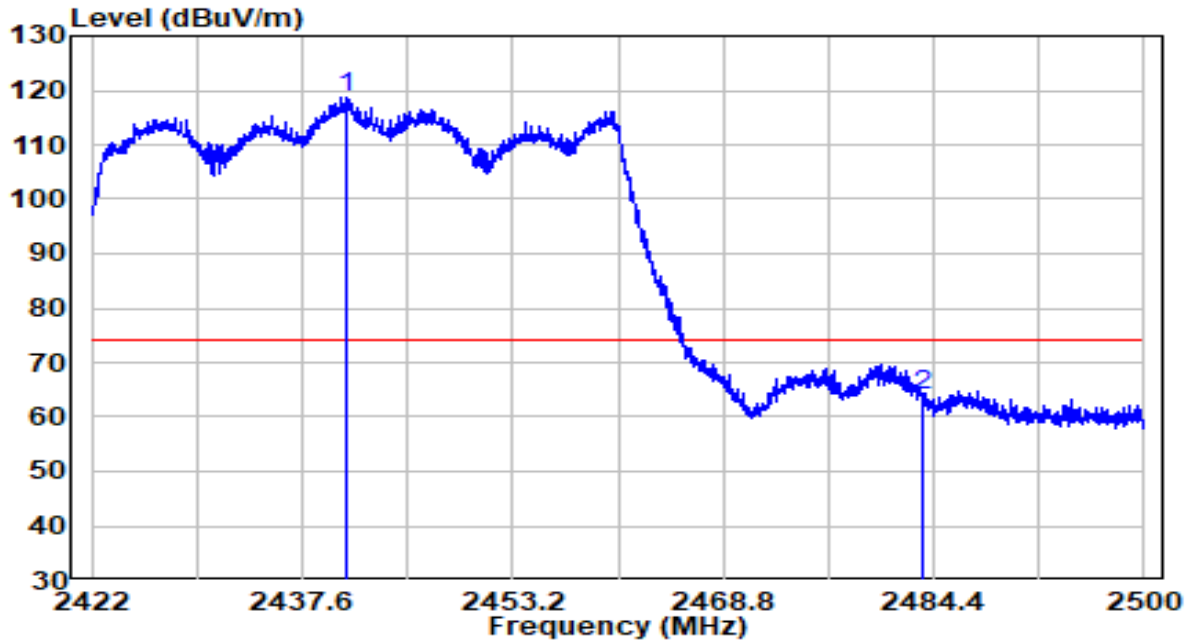


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2440.954	86.40	32.43	118.83	N/A	N/A	Peak
2	2483.500	31.29	32.61	63.90	-10.10	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2442MHz	Test Voltage	By PoE

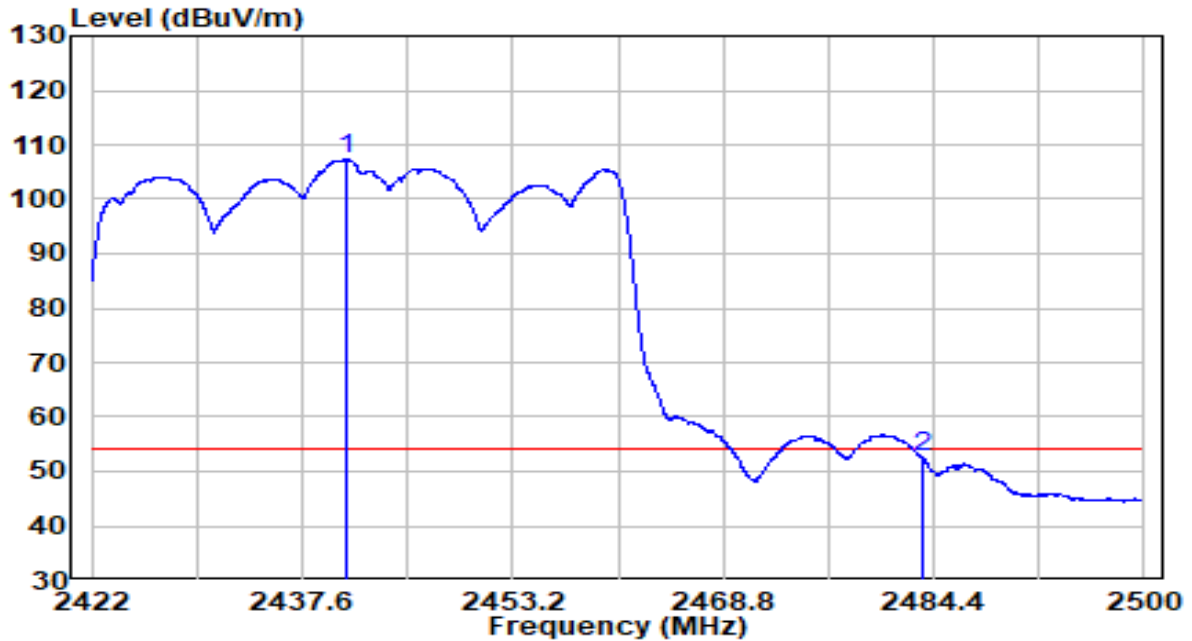


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2440.876	74.79	32.43	107.22	N/A	N/A	Average
2	2483.500	20.12	32.61	52.73	-1.27	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2447MHz	Test Voltage	By PoE

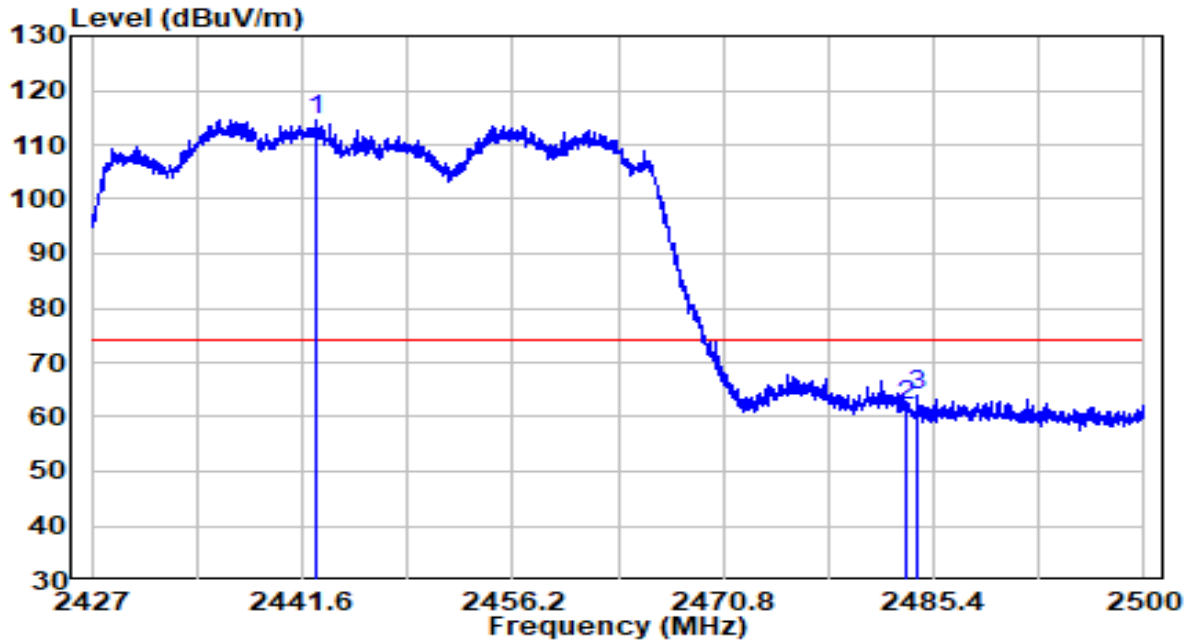


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2442.476	82.13	32.44	114.57	N/A	N/A	Peak
2	2483.500	29.32	32.61	61.93	-12.07	74.00	Peak
3	2484.342	31.31	32.61	63.92	-10.08	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2447MHz	Test Voltage	By PoE

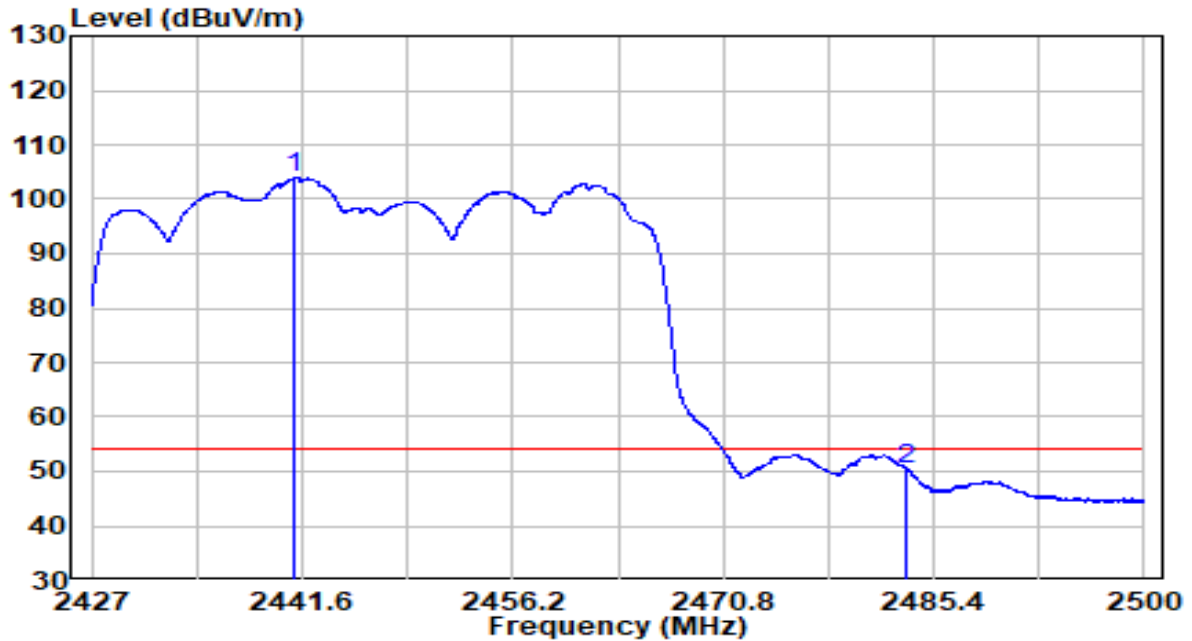


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2441.089	71.49	32.43	103.92	N/A	N/A	Average
2	2483.500	17.92	32.61	50.53	-3.47	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2447MHz	Test Voltage	By PoE

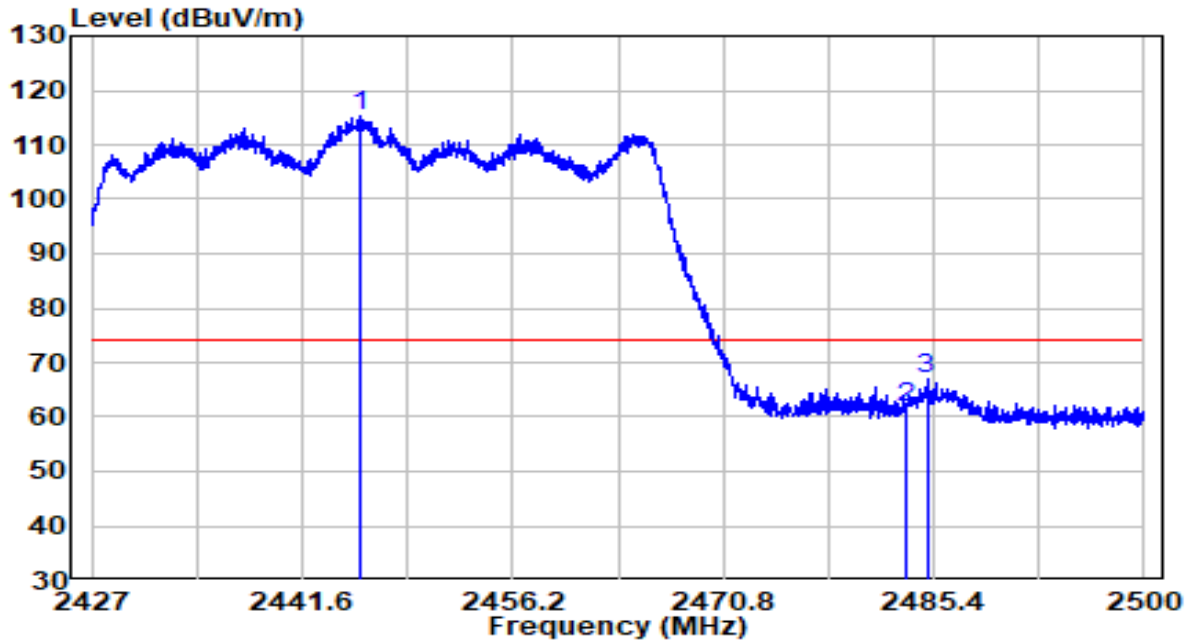


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2445.542	83.00	32.45	115.45	N/A	N/A	Peak
2	2483.500	29.03	32.61	61.64	-12.36	74.00	Peak
3	2484.926	34.18	32.62	66.80	-7.20	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	26°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2447MHz	Test Voltage	By PoE

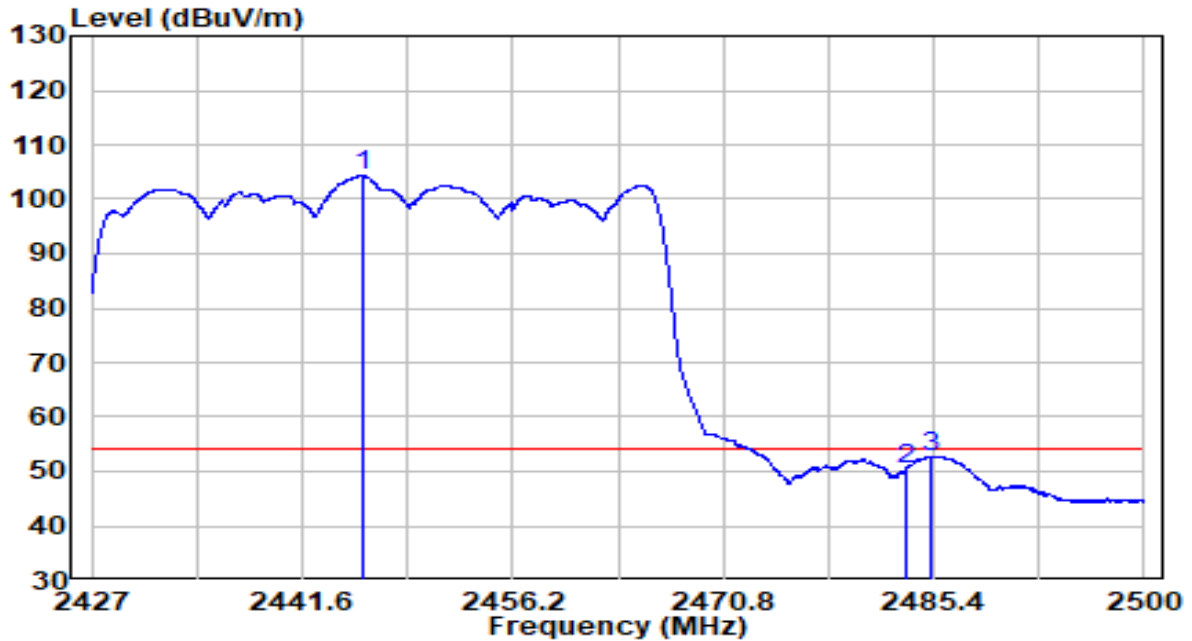


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)	
1	*	2445.798	71.82	32.45	104.27	N/A	N/A	Average
2		2483.500	17.72	32.61	50.33	-3.67	54.00	Average
3	*	2485.254	20.17	32.62	52.79	-1.21	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	By PoE

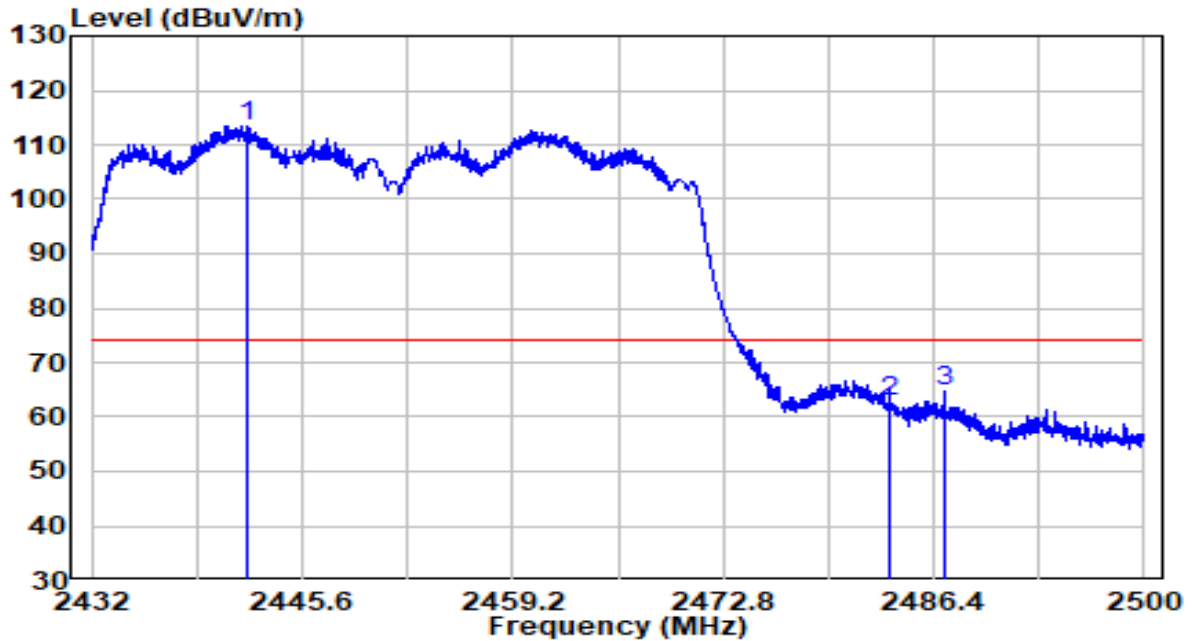


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2442.064	80.99	32.44	113.43	N/A	N/A	Peak
2	2483.510	30.37	32.61	62.98	-11.02	74.00	Peak
3	2487.046	32.10	32.63	64.72	-9.28	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	By PoE

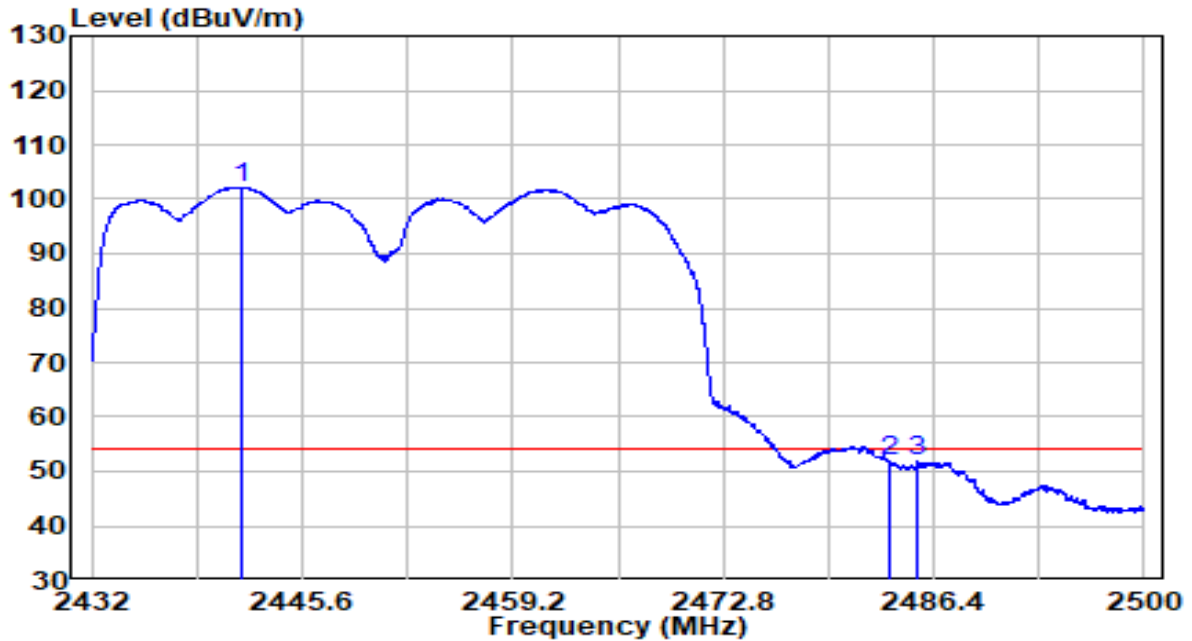


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2441.758	69.83	32.44	102.27	N/A	N/A	Average
2	2483.500	19.10	32.61	51.71	-2.29	54.00	Average
3	2485.278	19.22	32.62	51.84	-2.16	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	By PoE

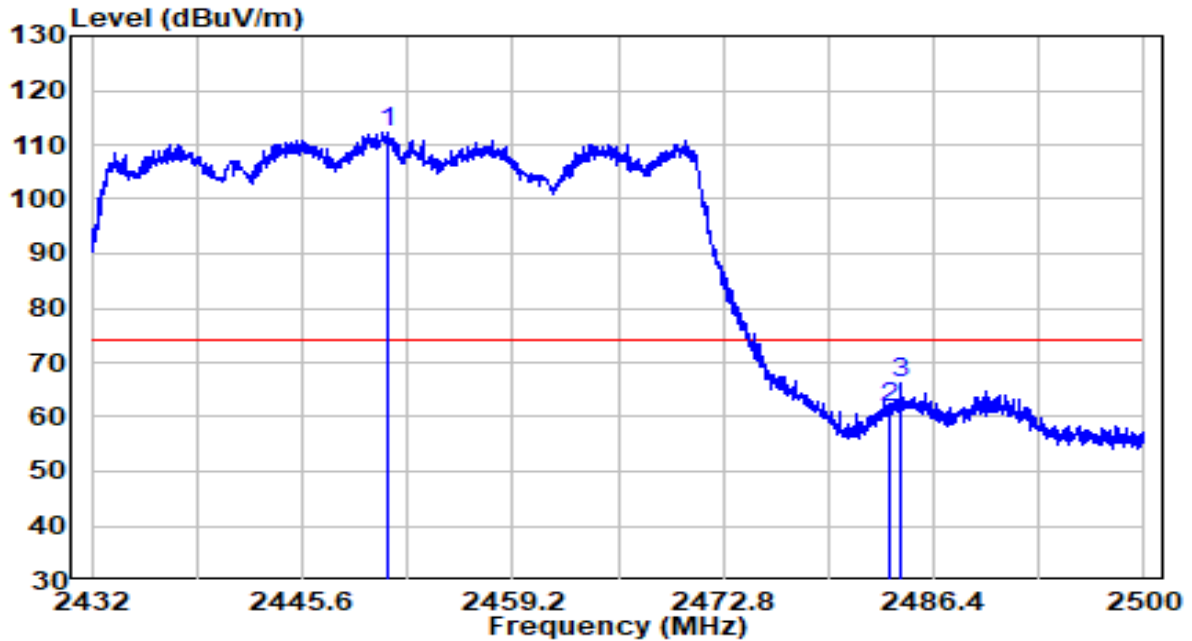


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	79.94	32.47	112.41	N/A	N/A	Peak
2		29.13	32.61	61.74	-12.26	74.00	Peak
3		33.64	32.61	66.25	-7.75	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	By PoE

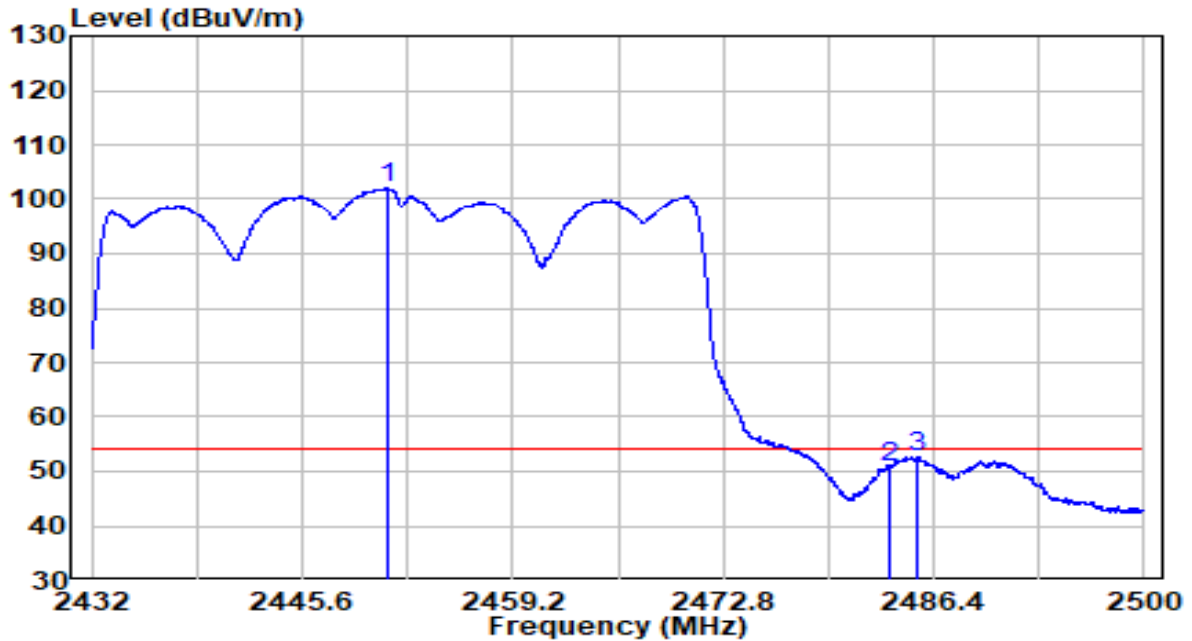


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2451.074	69.62	32.47	102.09	N/A	N/A	Average
2	2483.510	18.21	32.61	50.82	-3.18	54.00	Average
3	2485.312	19.99	32.62	52.61	-1.39	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

**APEX0587 Filter 2#**

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2412MHz	Test Voltage	By PoE

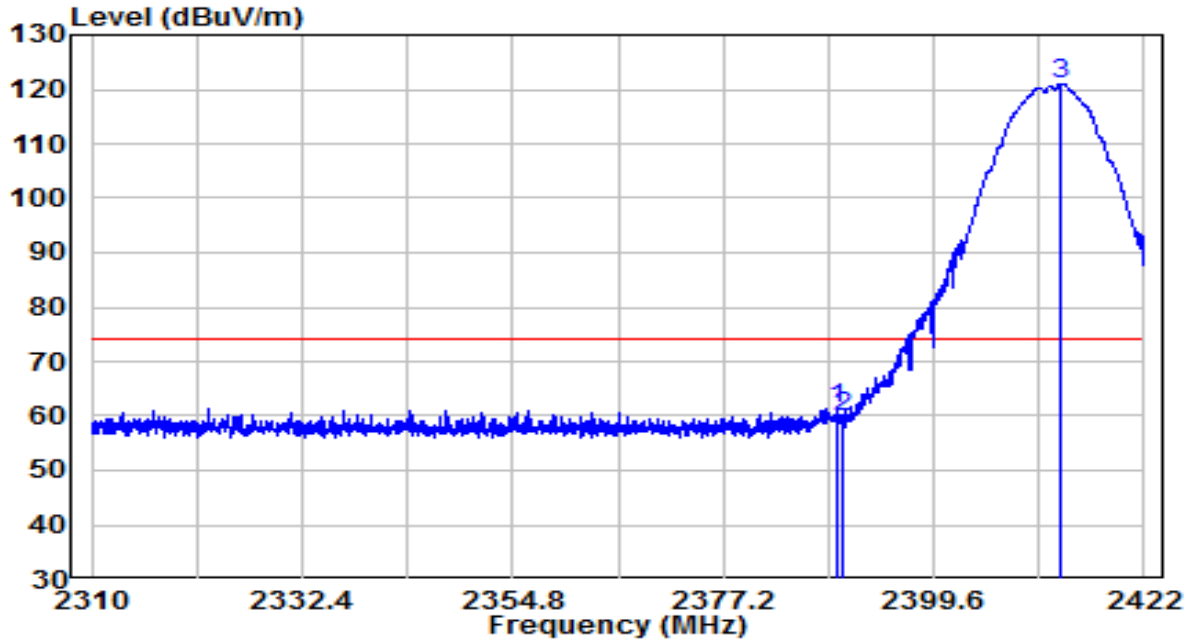


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2389.352	29.13	32.22	61.35	-12.65	74.00	Peak
2	2390.000	27.41	32.22	59.63	-14.37	74.00	Peak
3	* 2413.096	88.70	32.32	121.02	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2412MHz	Test Voltage	By PoE

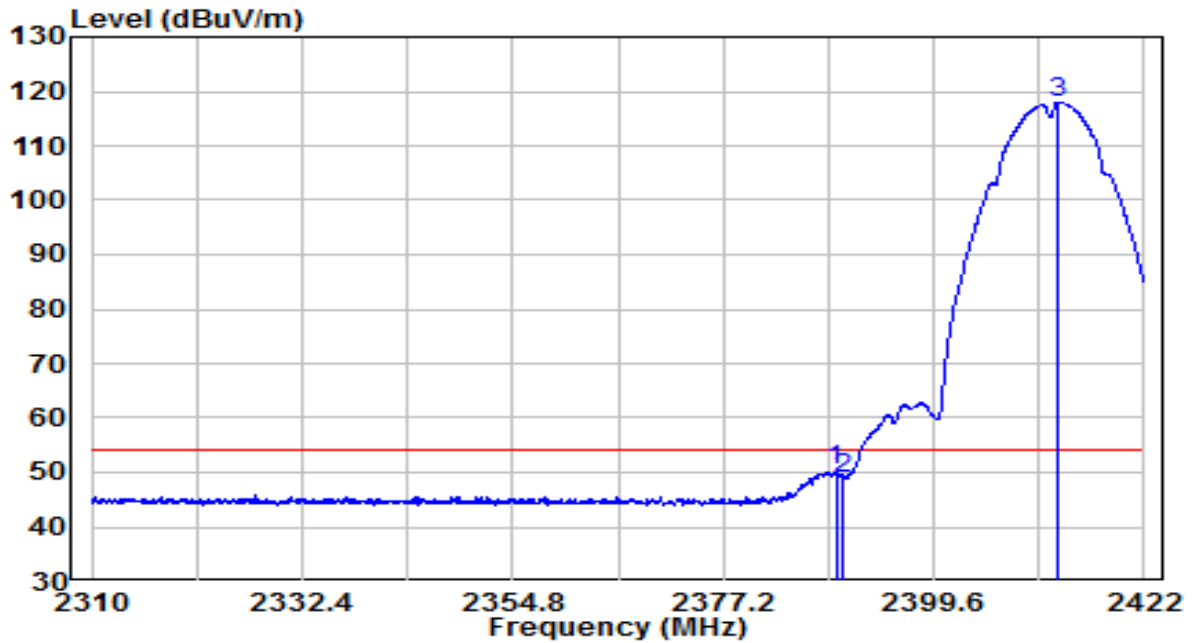


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.184	18.17	32.21	50.39	-3.61	54.00	Average
2	2390.000	16.60	32.22	48.82	-5.18	54.00	Average
3	* 2412.816	85.65	32.31	117.96	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2412MHz	Test Voltage	By PoE

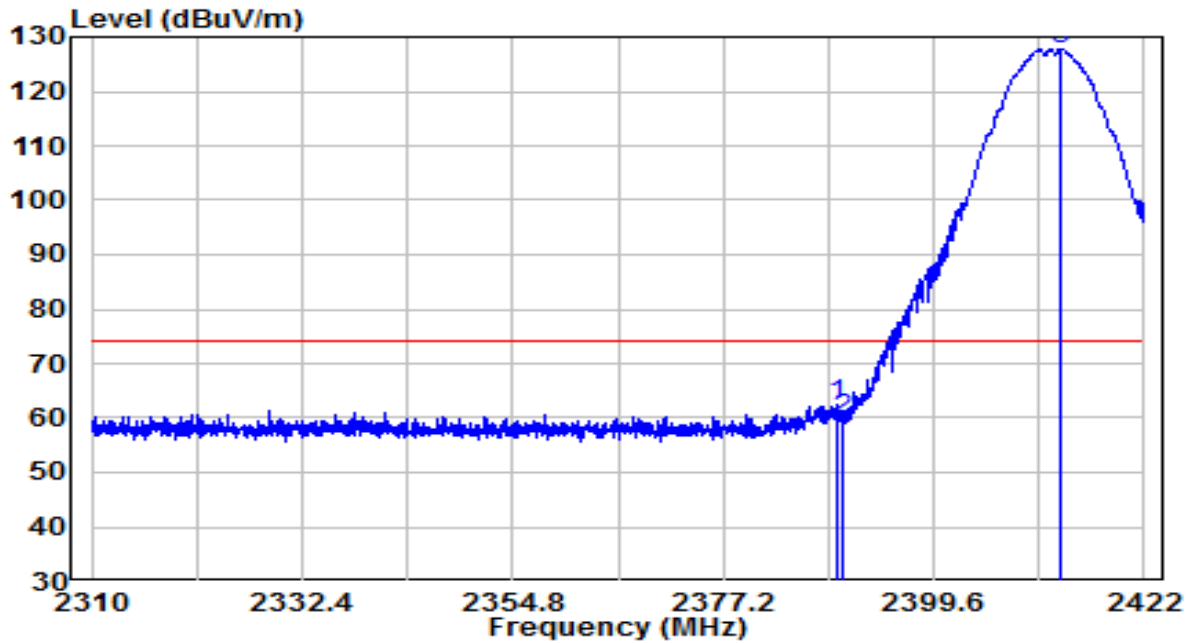


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.352	30.39	32.22	62.61	-11.39	74.00	Peak
2	2390.000	27.56	32.22	59.78	-14.22	74.00	Peak
3	* 2413.096	95.42	32.32	127.74	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2412MHz	Test Voltage	By PoE

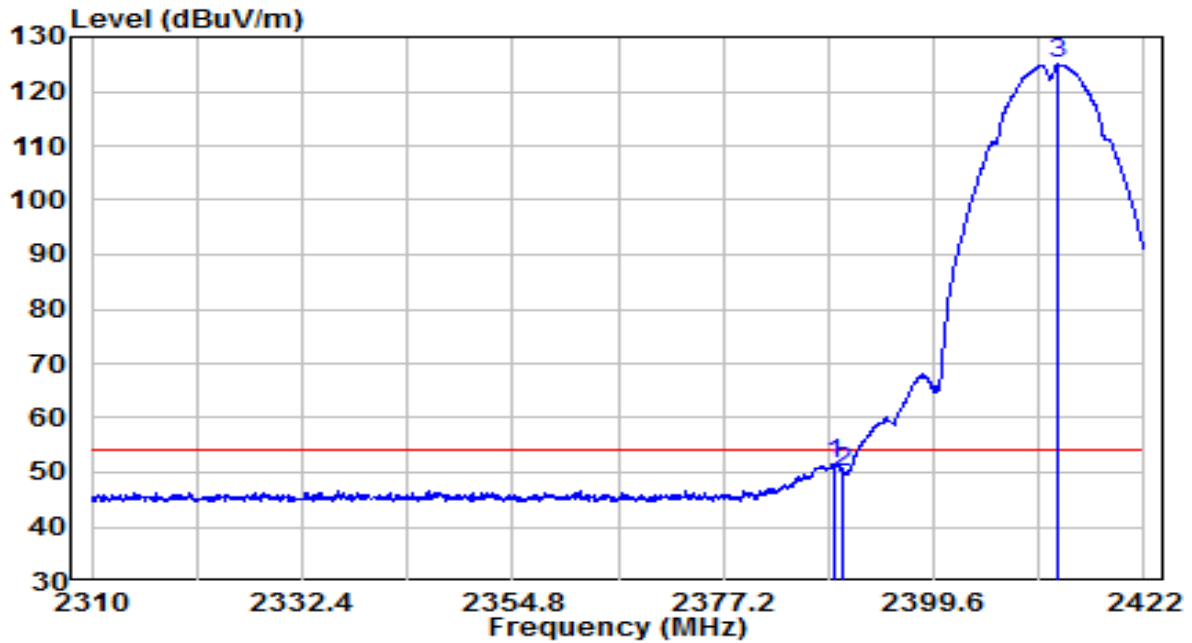


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2388.960	19.36	32.21	51.58	-2.42	54.00	Average
2	2390.000	17.75	32.22	49.97	-4.03	54.00	Average
3	* 2412.872	92.61	32.31	124.92	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2412MHz	Test Voltage	By PoE

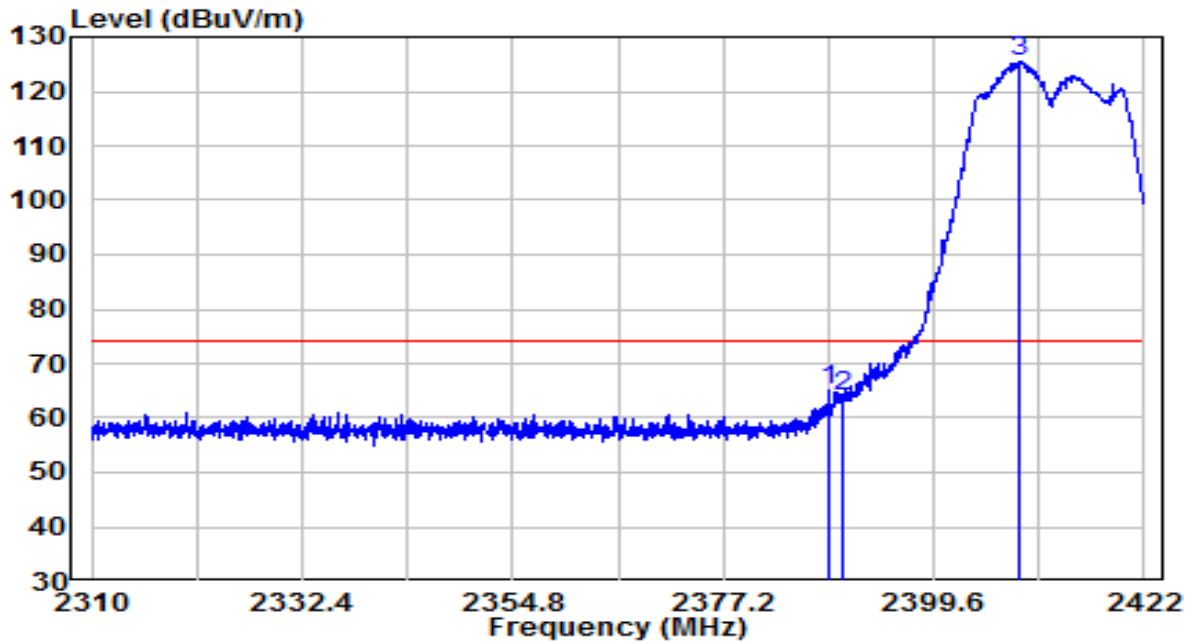


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2388.456	33.02	32.21	65.23	-8.77	74.00	Peak
2	2390.000	31.66	32.22	63.88	-10.12	74.00	Peak
3	* 2408.672	93.35	32.30	125.65	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2412MHz	Test Voltage	By PoE

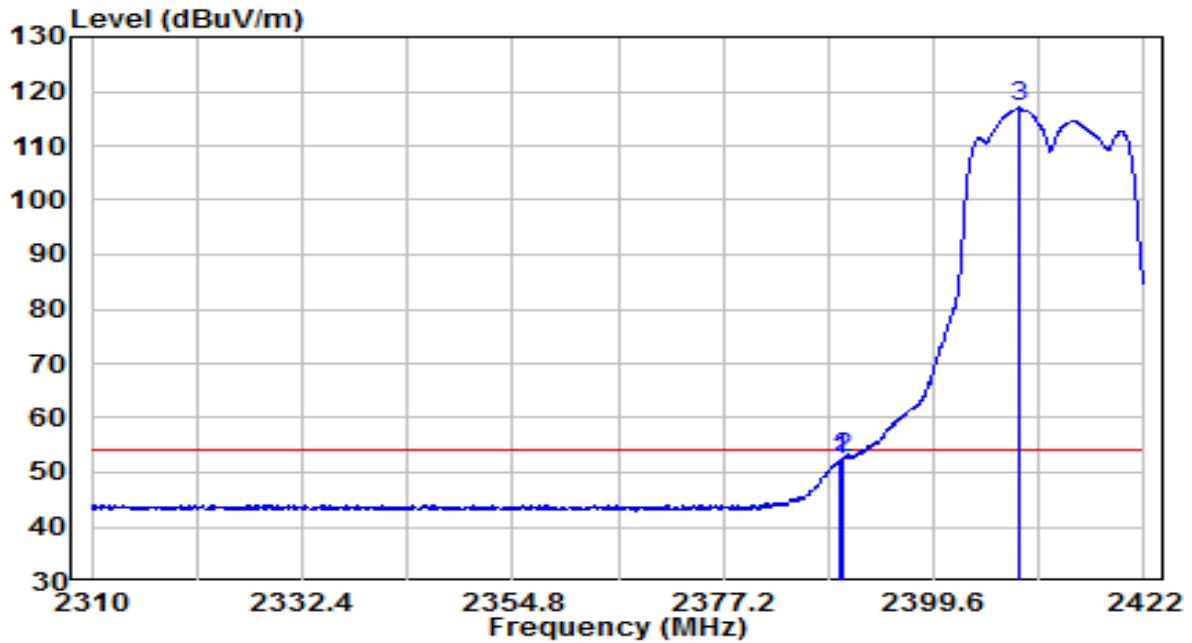


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2389.632	20.23	32.22	52.45	-1.55	54.00	Average
2	2390.000	20.30	32.22	52.52	-1.48	54.00	Average
3	* 2408.728	84.70	32.30	117.00	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2412MHz	Test Voltage	By PoE

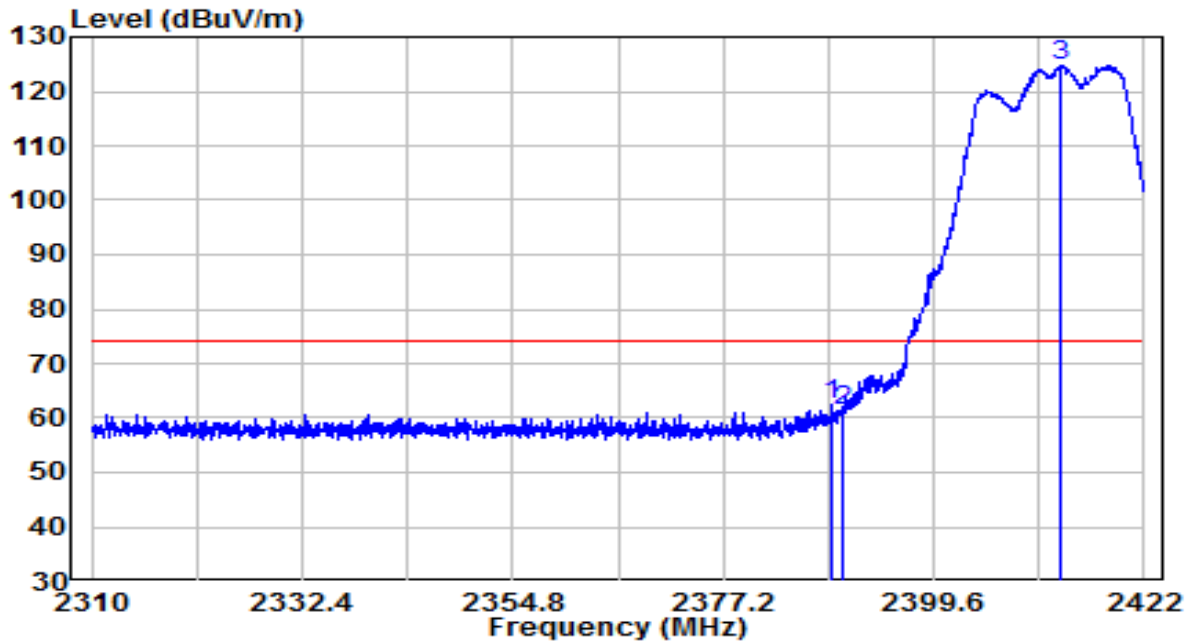


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2388.848	30.23	32.21	62.44	-11.56	74.00	Peak
2	2390.000	29.10	32.22	61.32	-12.68	74.00	Peak
3	* 2412.984	92.57	32.31	124.88	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2412MHz	Test Voltage	By PoE

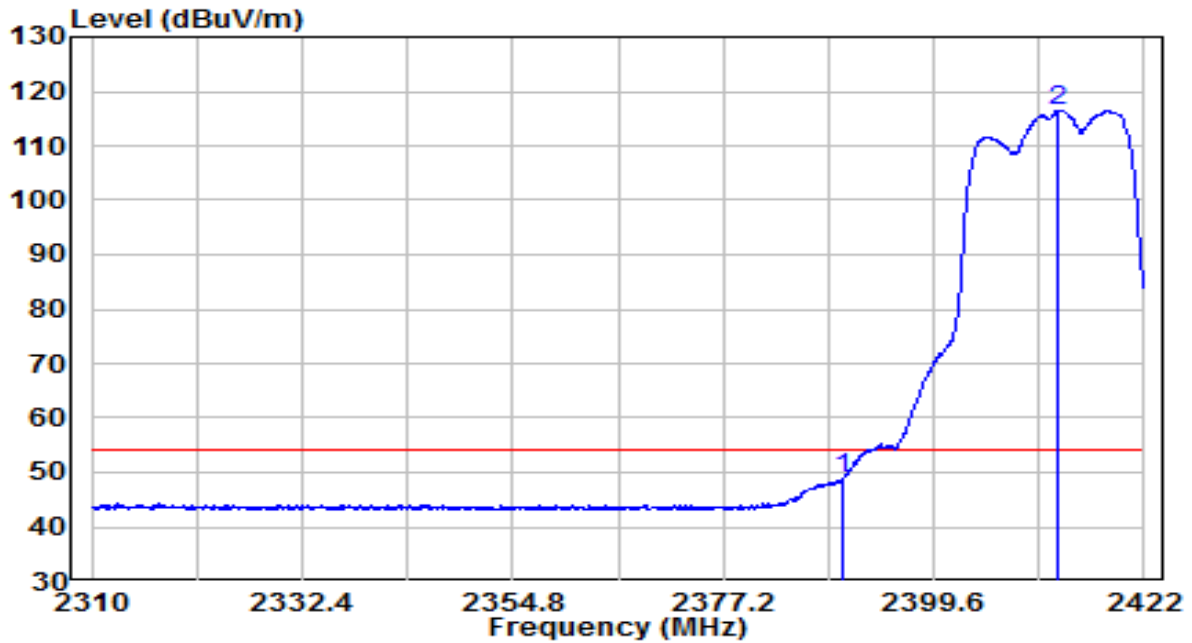


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	16.79	32.22	49.01	-4.99	54.00	Average
2	* 2412.816	84.27	32.31	116.58	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2412MHz	Test Voltage	By PoE

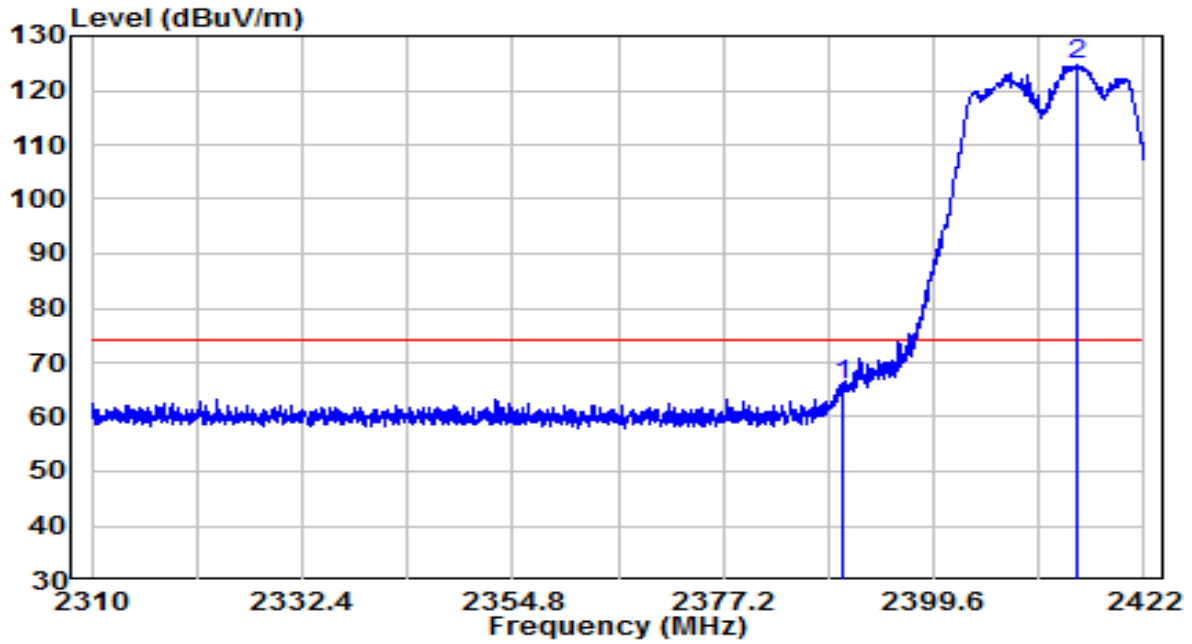


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	33.57	32.22	65.79	-8.21	74.00	Peak
2	* 2414.776	92.39	32.32	124.72	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2412MHz	Test Voltage	By PoE

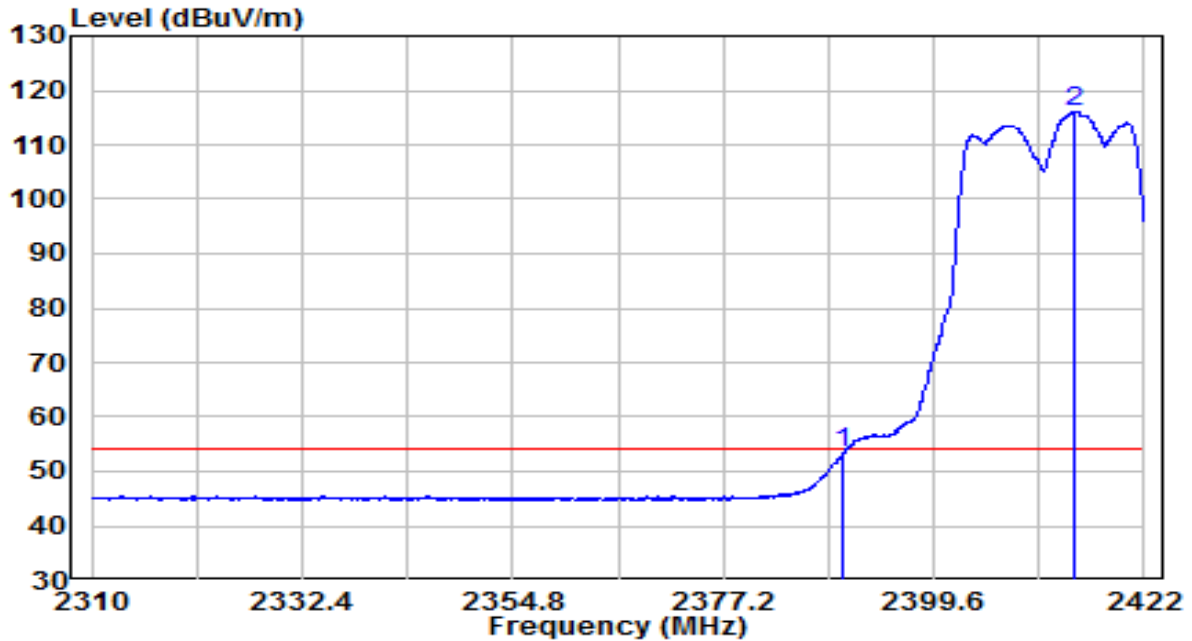


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	21.27	32.22	53.49	-0.51	54.00	Average
2	* 2414.608	83.70	32.32	116.03	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2412MHz	Test Voltage	By PoE

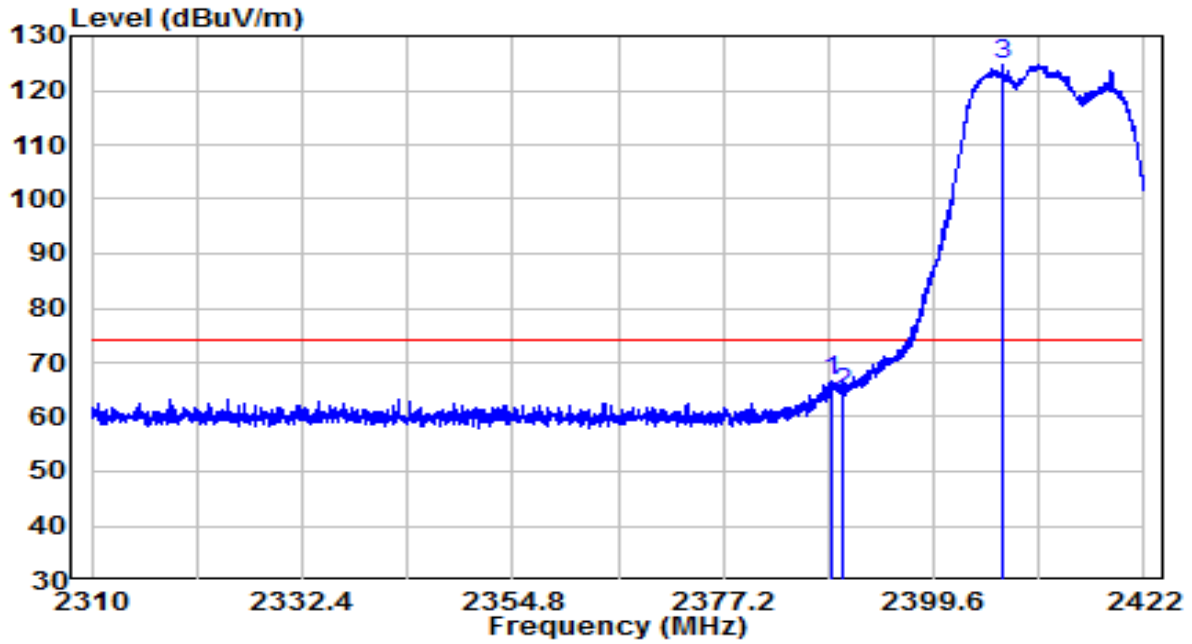


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2388.848	34.55	32.21	66.76	-7.24	74.00	Peak
2	2390.000	31.99	32.22	64.21	-9.79	74.00	Peak
3	* 2406.936	92.53	32.29	124.82	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-11-01
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2412MHz	Test Voltage	By PoE

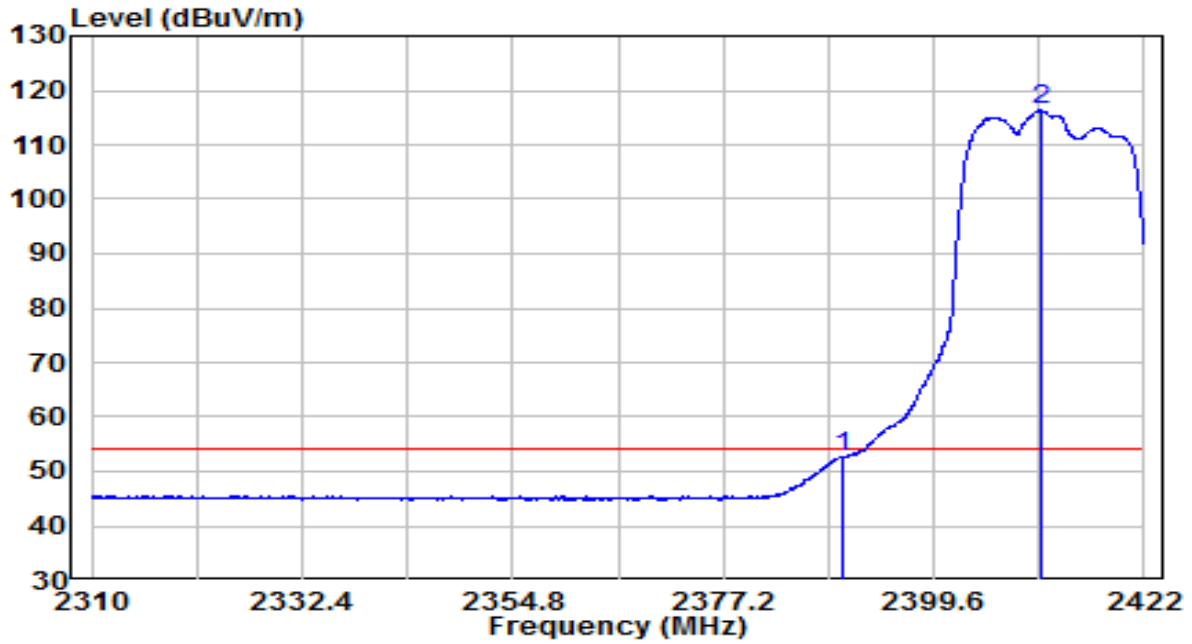


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	20.59	32.22	52.81	-1.19	54.00	Average
2	*	84.01	32.31	116.31	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2422MHz	Test Voltage	By PoE

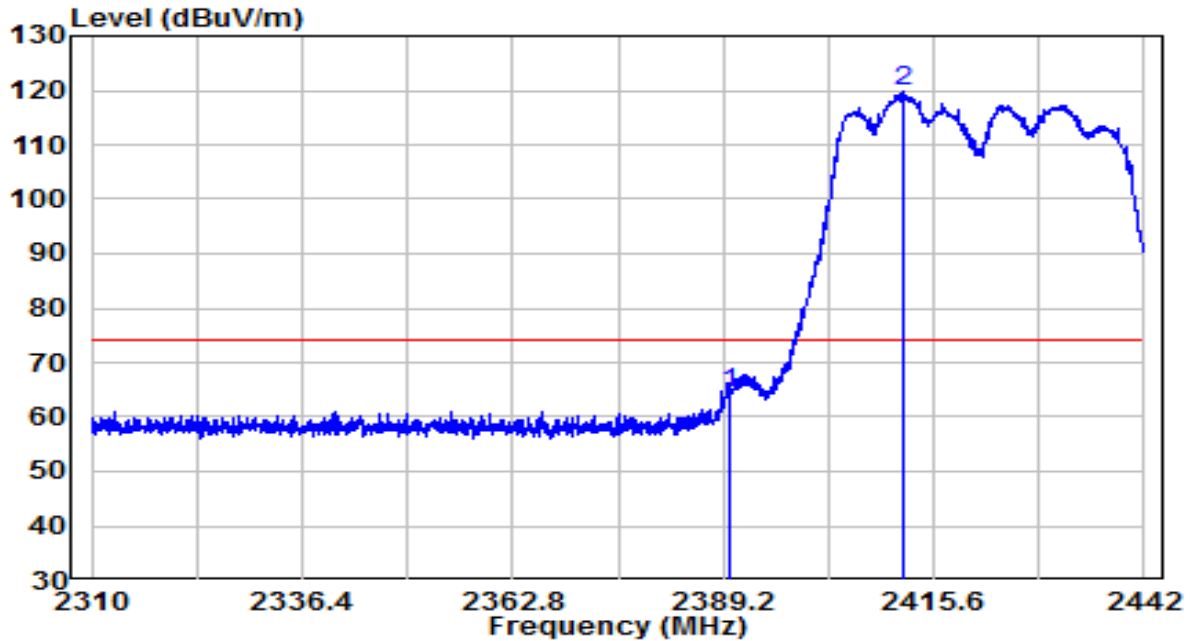


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	32.15	32.22	64.37	-9.63	74.00	Peak
2	* 2411.838	87.39	32.31	119.70	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2422MHz	Test Voltage	By PoE

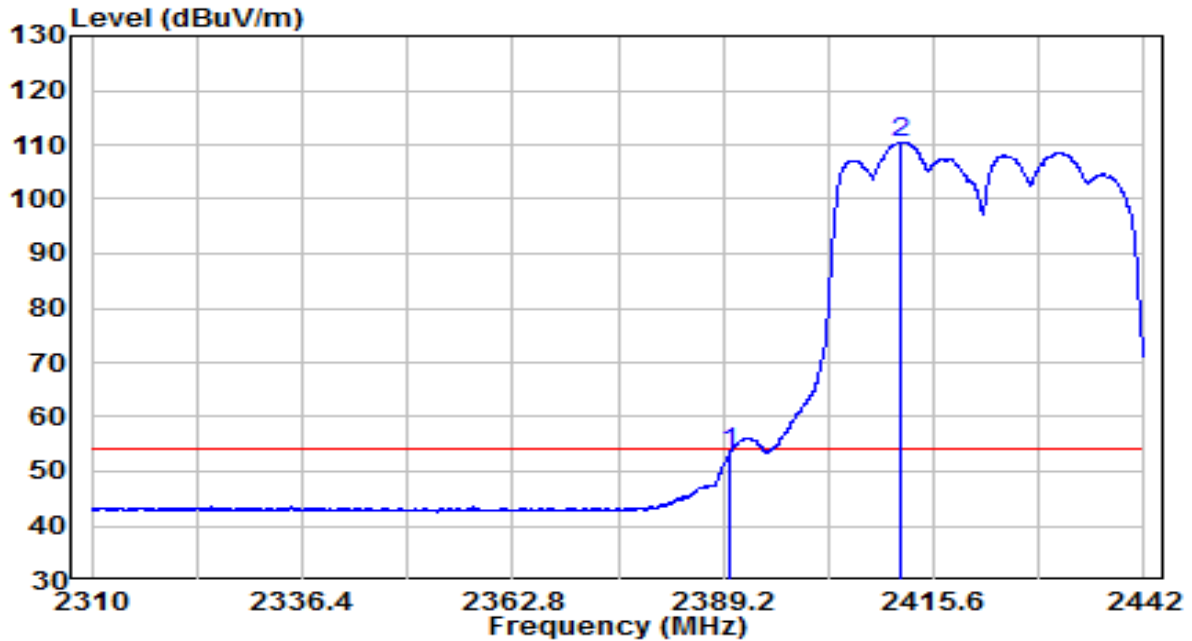


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	21.02	32.22	53.23	-0.77	54.00	Average
2	* 2411.442	78.24	32.31	110.55	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2422MHz	Test Voltage	By PoE

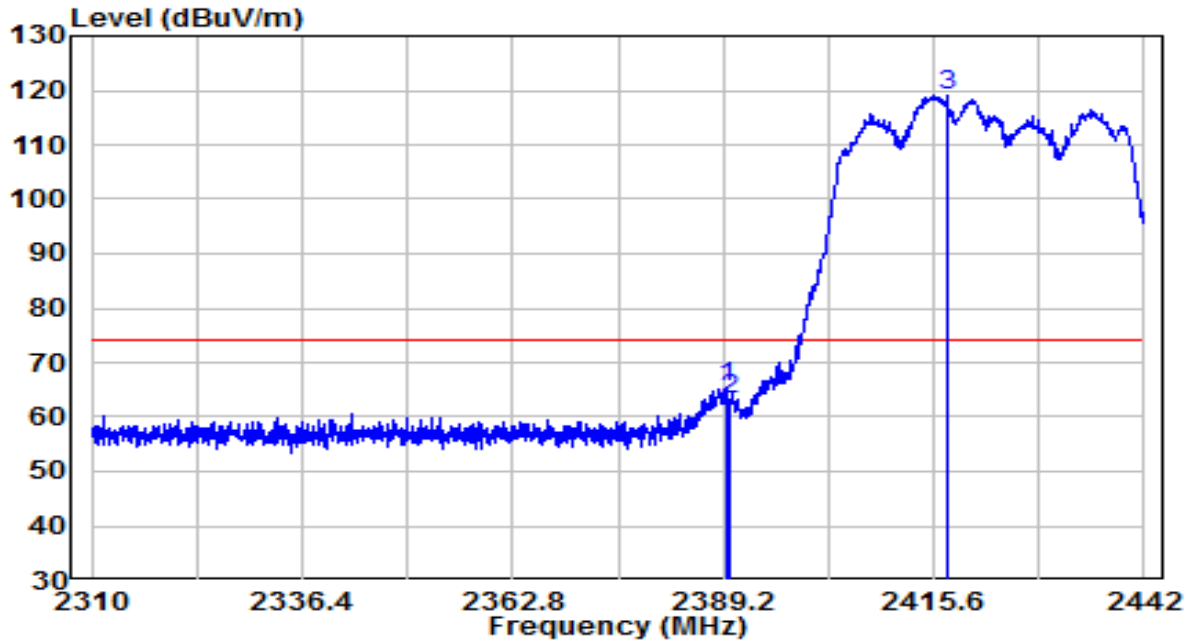


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2389.596	33.09	32.22	65.30	-8.70	74.00	Peak
2	2390.000	30.88	32.22	63.10	-10.90	74.00	Peak
3	* 2417.184	86.68	32.33	119.01	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2422MHz	Test Voltage	By PoE

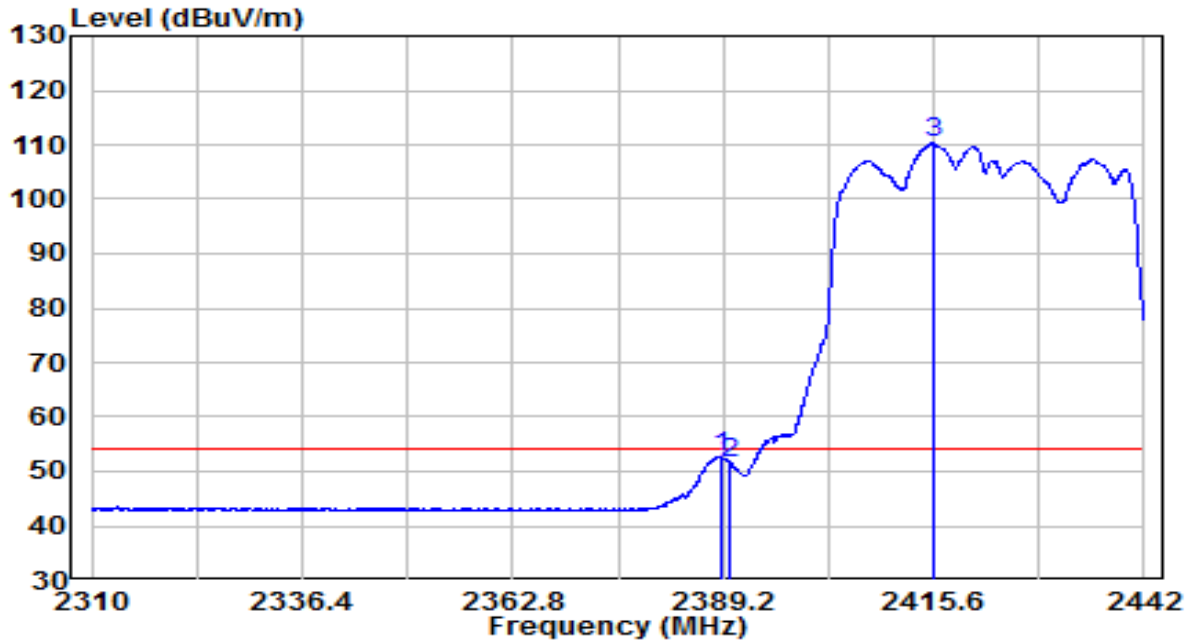


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.068	20.35	32.21	52.57	-1.43	54.00	Average
2	2390.000	19.31	32.22	51.53	-2.47	54.00	Average
3	* 2415.468	78.02	32.32	110.34	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz	Test Voltage	By PoE

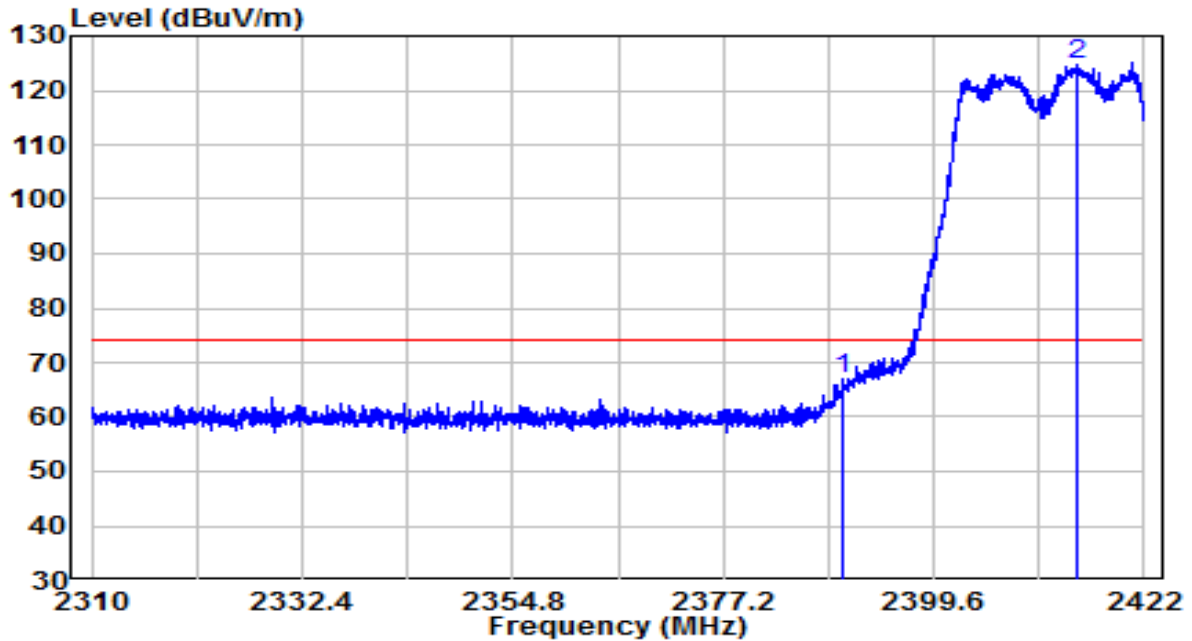


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	34.85	32.22	67.06	-6.94	74.00	Peak
2	* 2414.776	92.40	32.32	124.72	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz	Test Voltage	By PoE

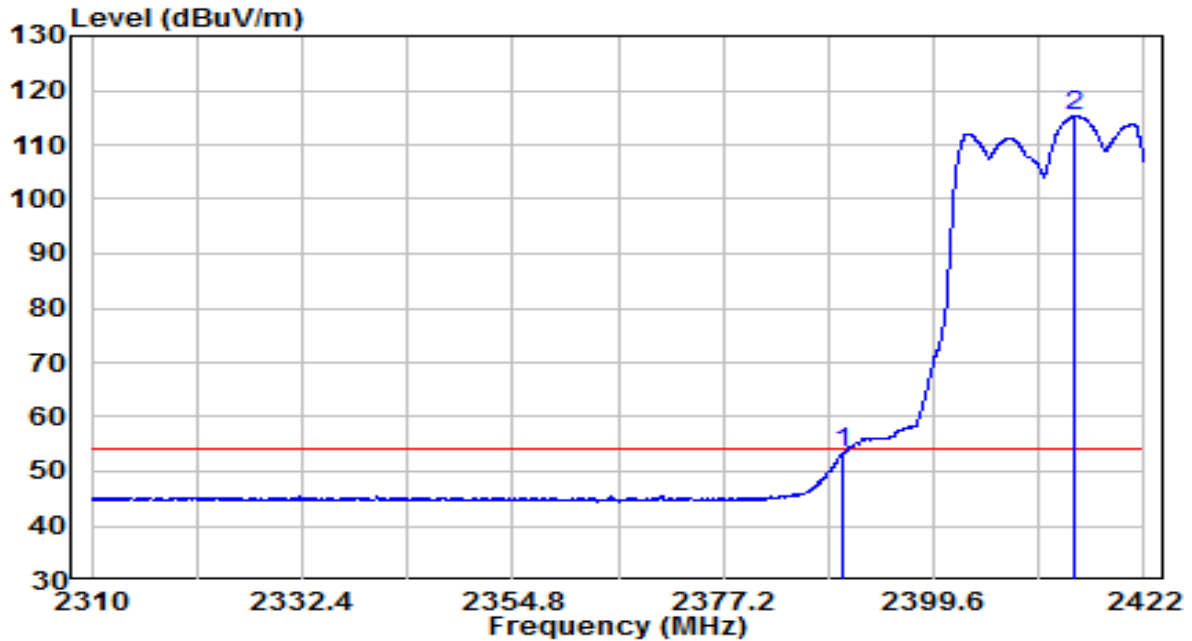


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	21.13	32.22	53.35	-0.65	54.00	Average
2	* 2414.608	82.95	32.32	115.27	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz	Test Voltage	By PoE

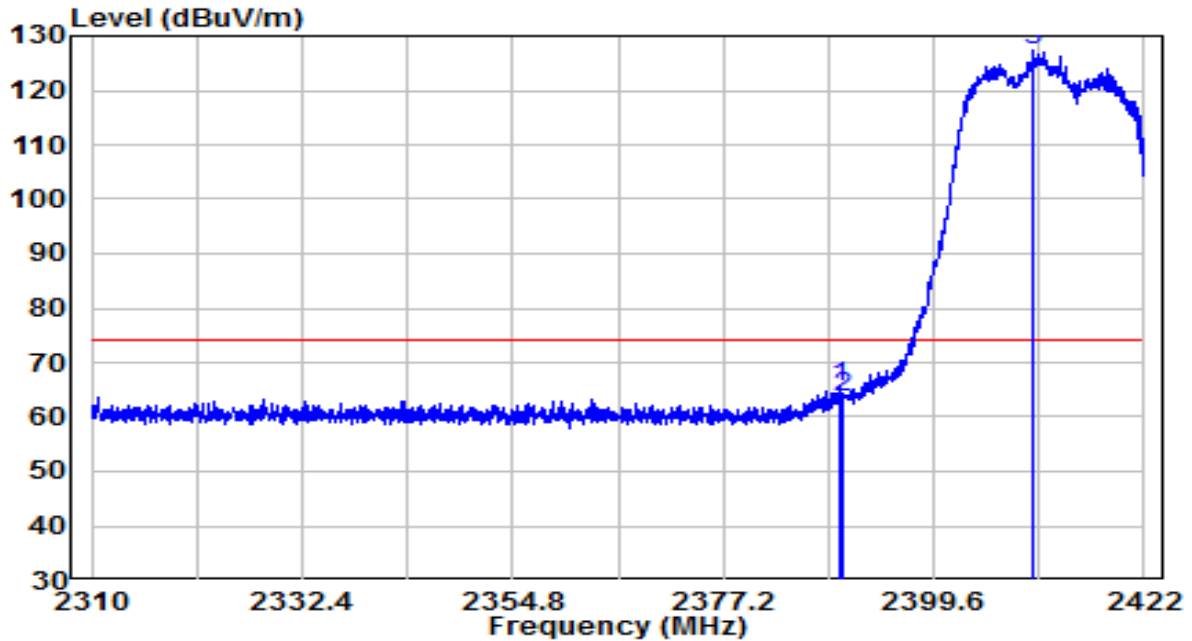


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2389.688	33.22	32.22	65.44	-8.56	74.00	Peak
2	2390.000	31.32	32.22	63.54	-10.46	74.00	Peak
3	* 2410.184	94.88	32.30	127.19	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz	Test Voltage	By PoE

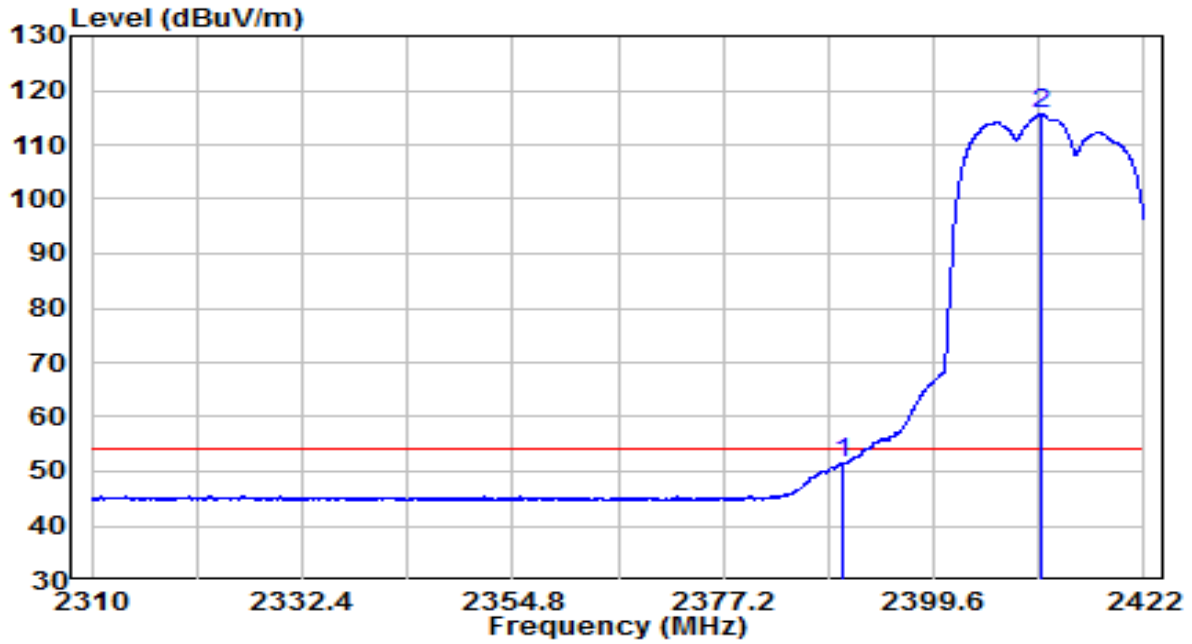


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	19.20	32.22	51.42	-2.58	54.00	Average
2	* 2411.080	83.40	32.31	115.71	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	By PoE

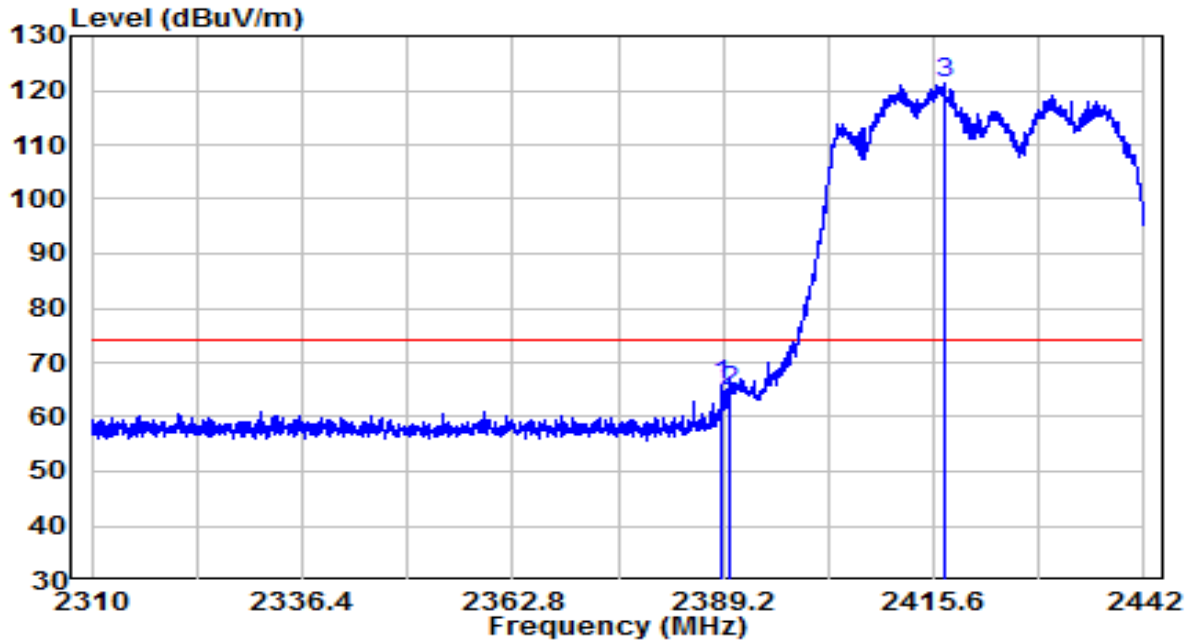


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2388.936	33.81	32.21	66.02	-7.98	74.00	Peak
2	2390.000	32.61	32.22	64.83	-9.17	74.00	Peak
3	* 2416.986	88.97	32.33	121.31	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	By PoE

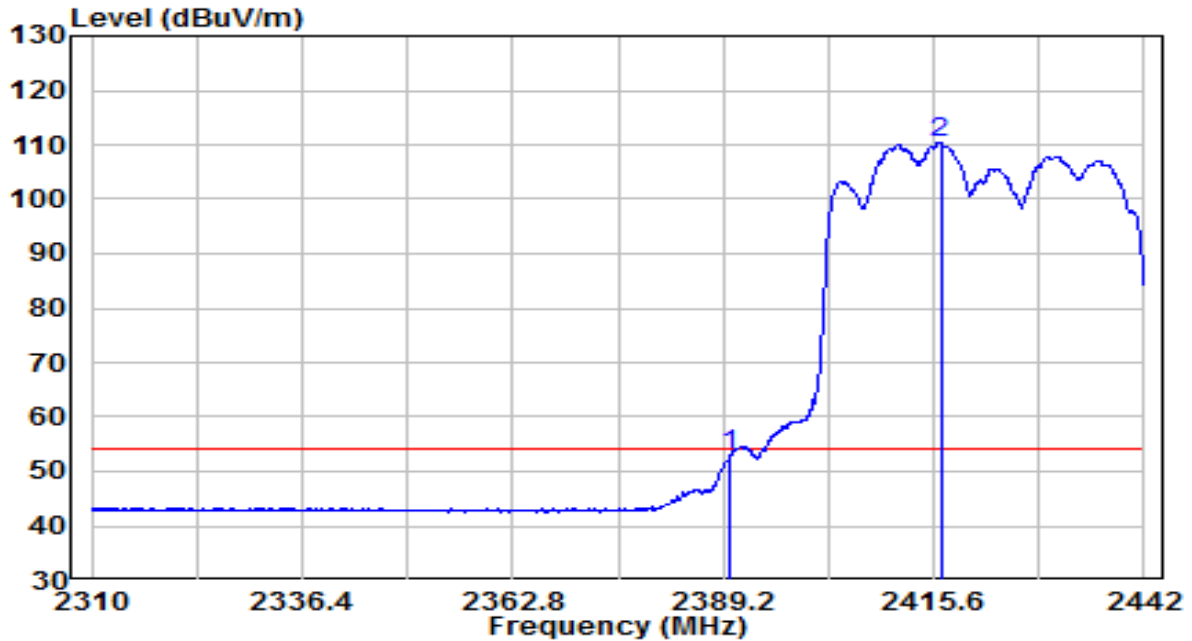


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	20.65	32.22	52.87	-1.13	54.00	Average
2	* 2416.458	78.09	32.33	110.42	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	By PoE

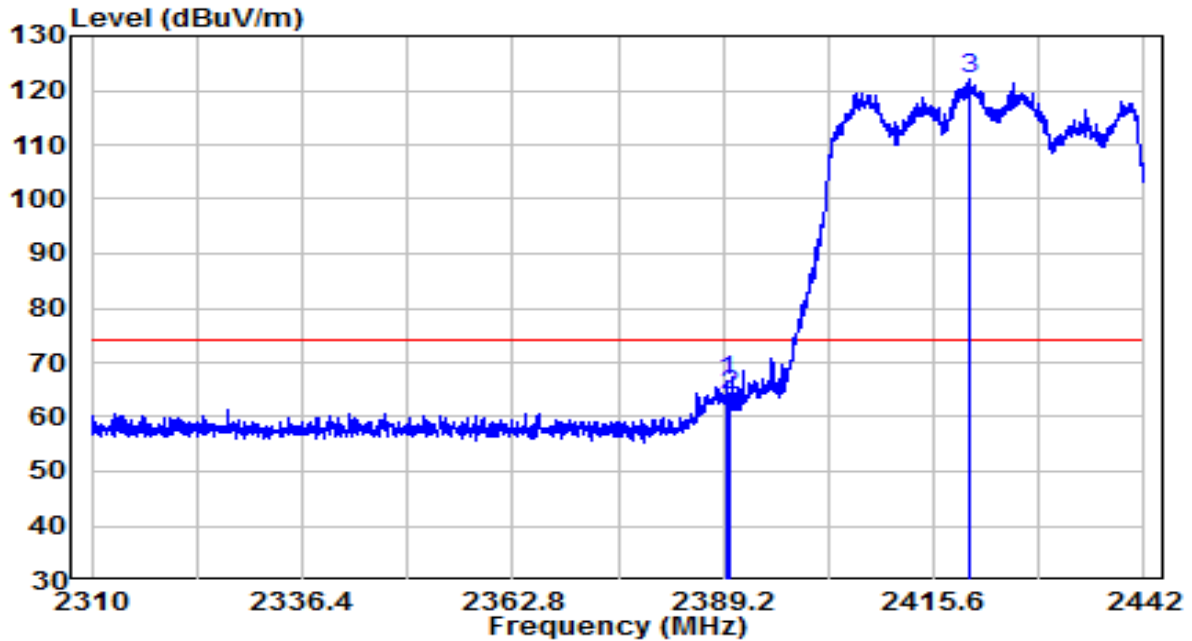


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.728	34.21	32.22	66.43	-7.57	74.00	Peak
2	2390.000	31.66	32.22	63.88	-10.12	74.00	Peak
3	* 2420.220	89.77	32.34	122.12	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	By PoE

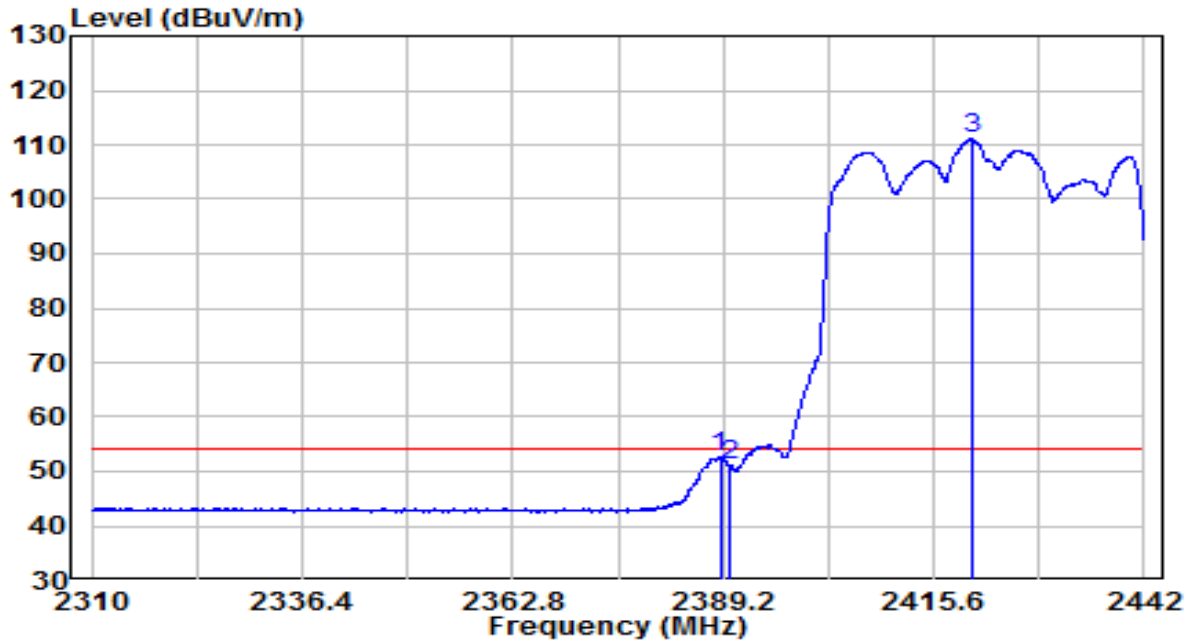


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2388.804	20.31	32.21	52.52	-1.48	54.00	Average
2	2390.000	18.80	32.22	51.01	-2.99	54.00	Average
3	* 2420.418	78.63	32.35	110.98	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

**APEX0587 Filter 3#**

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2462MHz	Test Voltage	By PoE

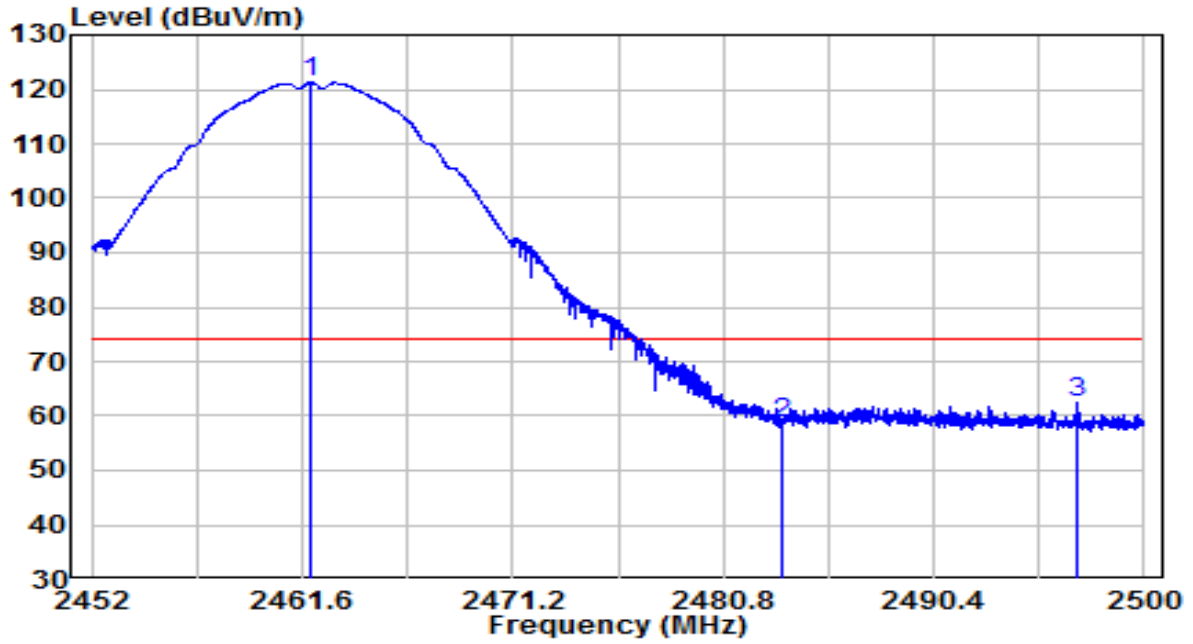


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	*	88.69	32.52	121.21	N/A	N/A	Peak
2		26.00	32.61	58.61	-15.39	74.00	Peak
3		29.64	32.67	62.31	-11.69	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2462MHz	Test Voltage	By PoE

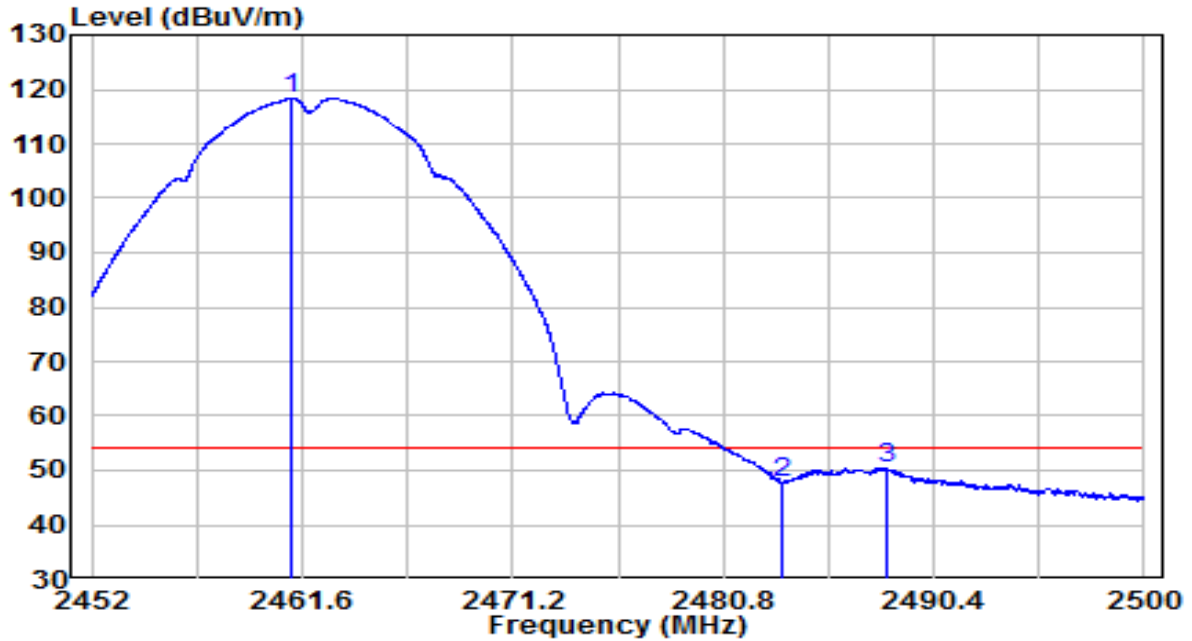


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	85.80	32.52	118.31	N/A	N/A	Average
2		15.19	32.61	47.80	-6.20	54.00	Average
3		17.76	32.63	50.39	-3.61	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2462MHz	Test Voltage	By PoE

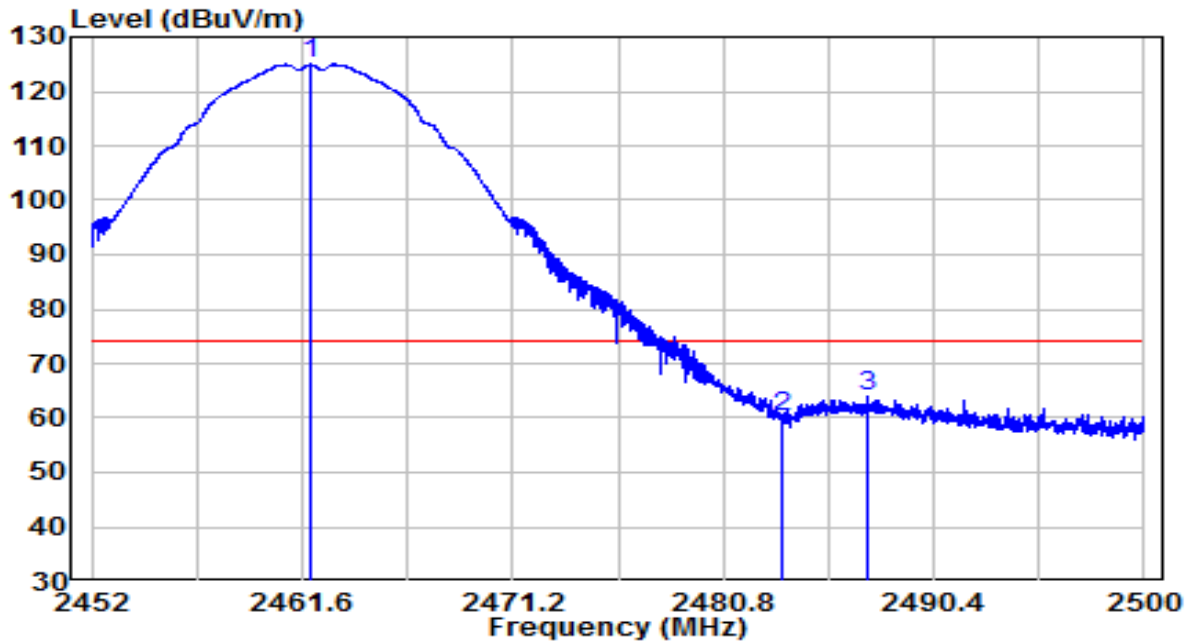


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	92.44	32.52	124.96	N/A	N/A	Peak
2		27.43	32.61	60.04	-13.96	74.00	Peak
3		31.41	32.63	64.04	-9.96	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2462MHz	Test Voltage	By PoE

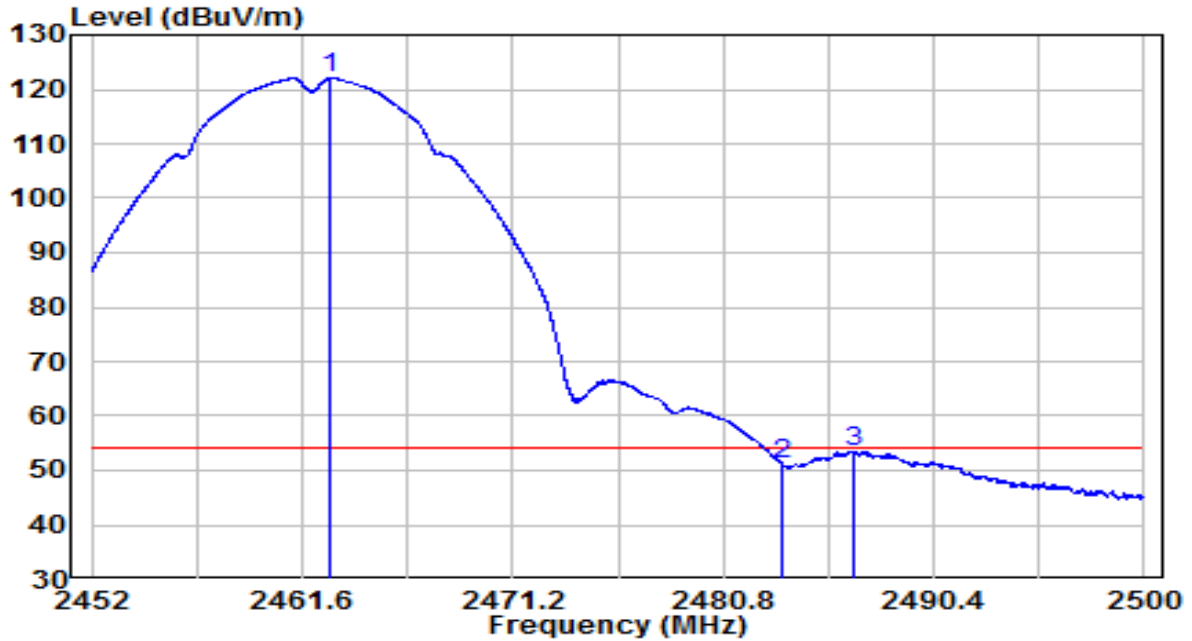


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	N/A	N/A	Remark (QP/PK/AV)	
1	*	2462.848	89.51	32.52	122.04	N/A	N/A	Average
2		2483.500	18.47	32.61	51.08	-2.92	54.00	Average
3		2486.728	20.87	32.62	53.50	-0.50	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2462MHz	Test Voltage	By PoE

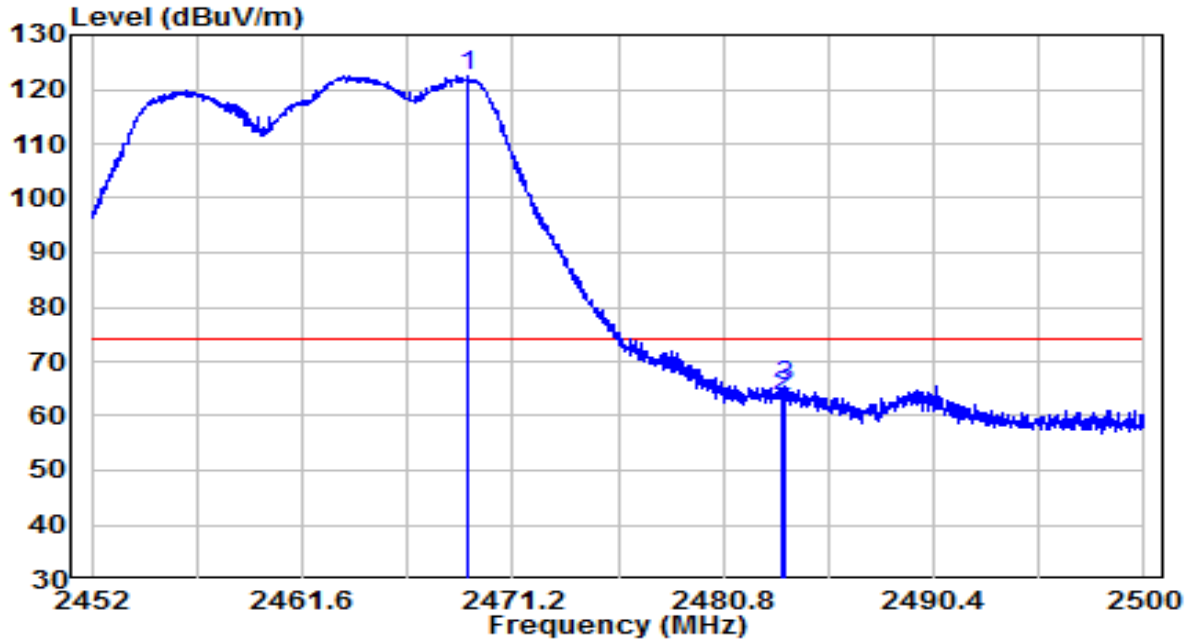


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2469.184	89.80	32.55	122.35	N/A	N/A	Peak
2	2483.500	31.16	32.61	63.77	-10.23	74.00	Peak
3	2483.560	32.92	32.61	65.54	-8.46	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2462MHz	Test Voltage	By PoE

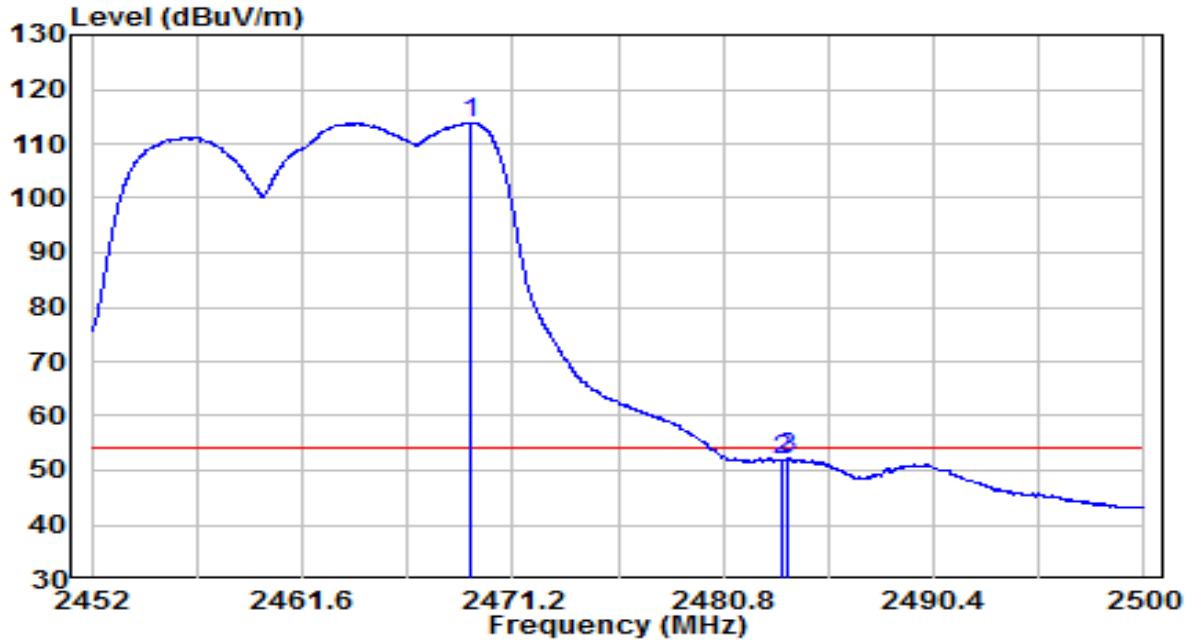


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2469.304	81.23	32.55	113.78	N/A	N/A	Average
2	2483.500	19.20	32.61	51.81	-2.19	54.00	Average
3	2483.776	19.54	32.61	52.15	-1.85	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2462MHz	Test Voltage	By PoE

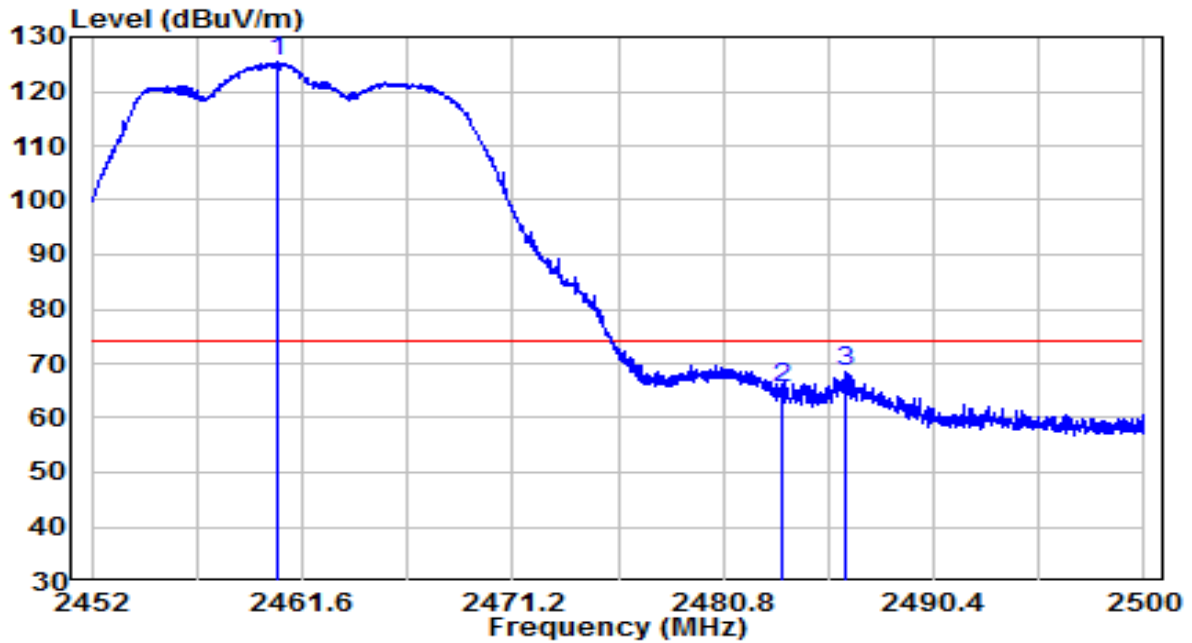


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	*	92.79	32.51	125.31	N/A	N/A	Peak
2	2483.500	33.00	32.61	65.61	-8.39	74.00	Peak
3	2486.368	35.69	32.62	68.31	-5.69	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2462MHz	Test Voltage	By PoE

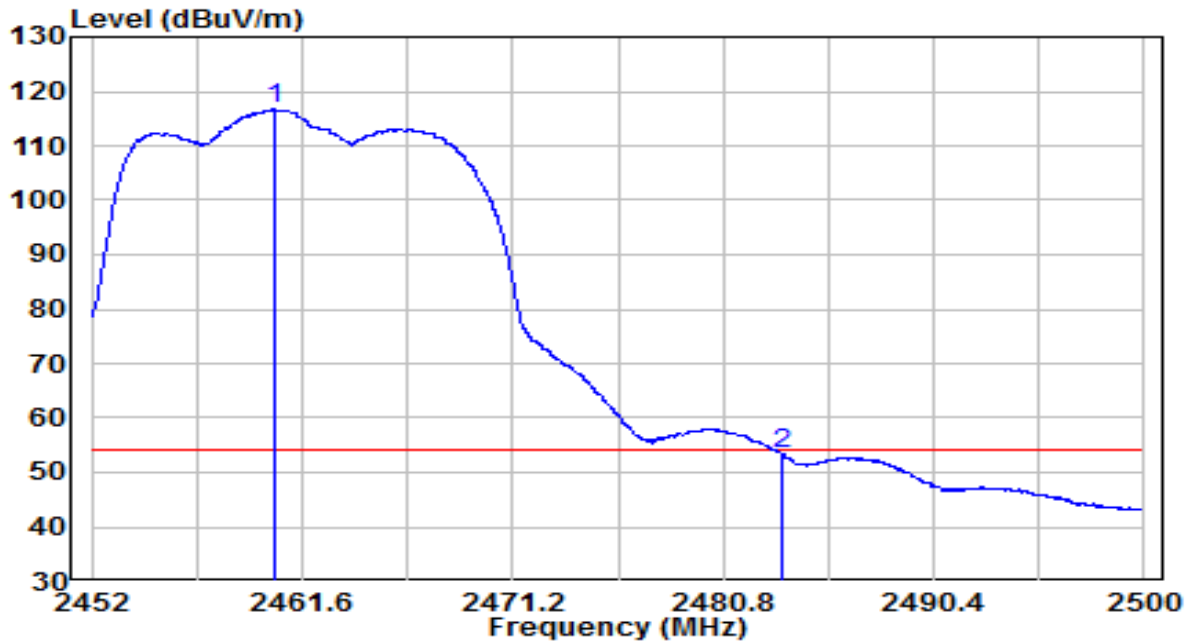


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2460.352	84.21	32.51	116.73	N/A	N/A	Average
2		2483.500	20.69	32.61	53.30	-0.70	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2462MHz	Test Voltage	By PoE

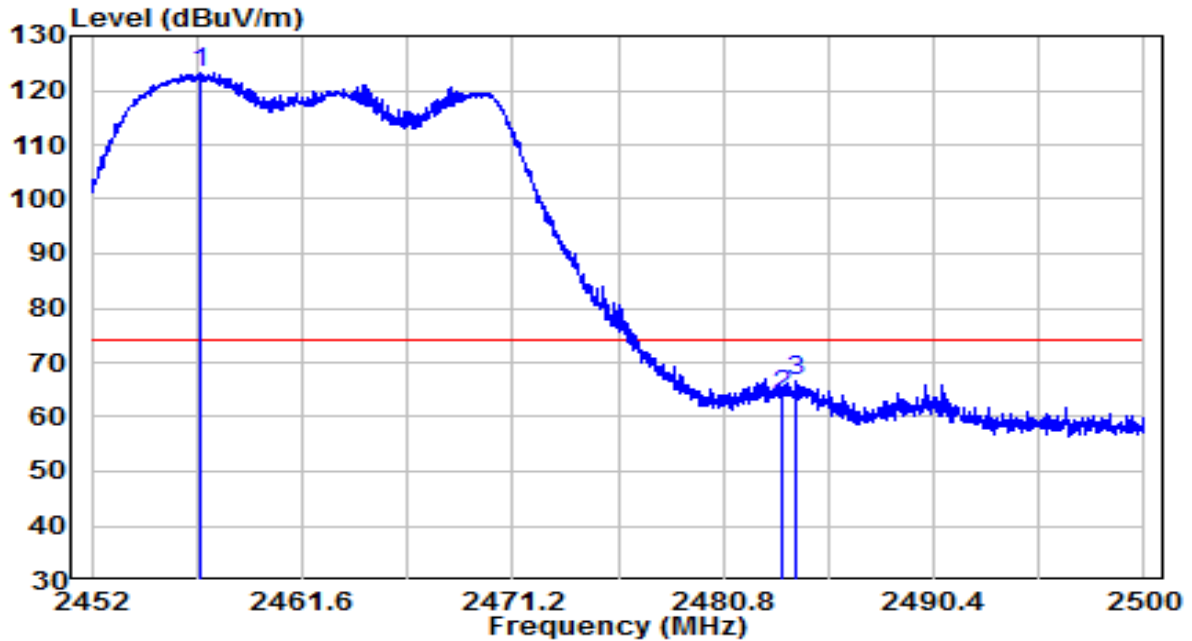


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2456.944	90.68	32.50	123.18	N/A	N/A	Peak
2	2483.500	31.34	32.61	63.95	-10.05	74.00	Peak
3	2484.136	34.00	32.61	66.62	-7.38	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2462MHz	Test Voltage	By PoE

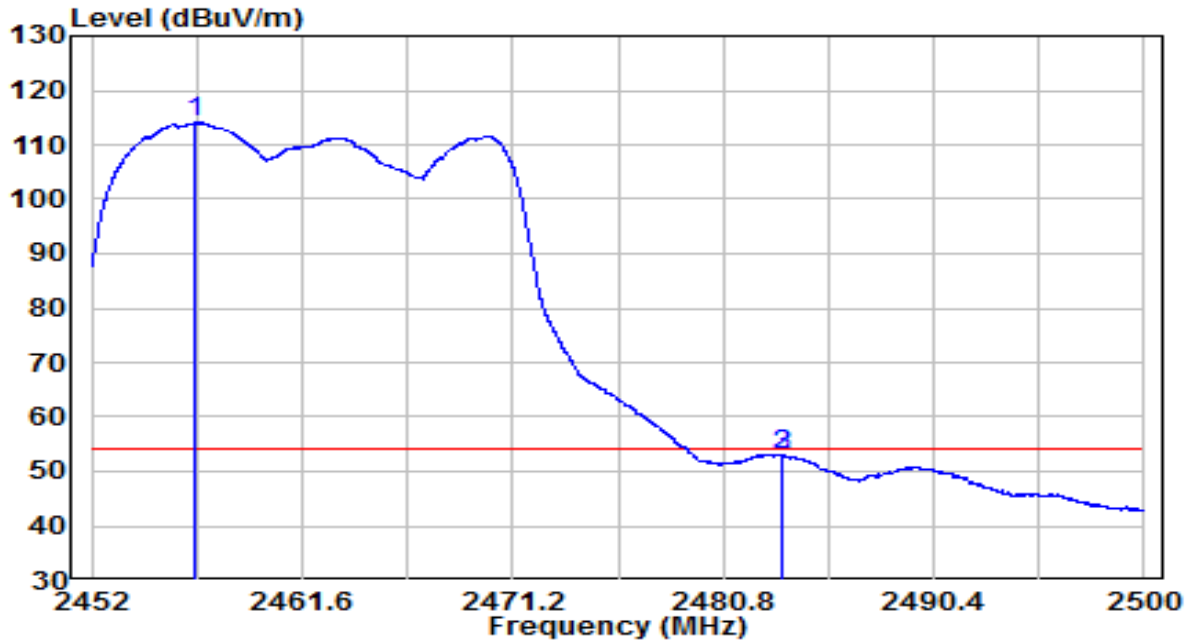


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)	
1	*	2456.704	81.49	32.50	113.98	N/A	N/A	Average
2		2483.500	20.45	32.61	53.06	-0.94	54.00	Average
3		2483.512	20.46	32.61	53.07	-0.93	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2462MHz	Test Voltage	By PoE

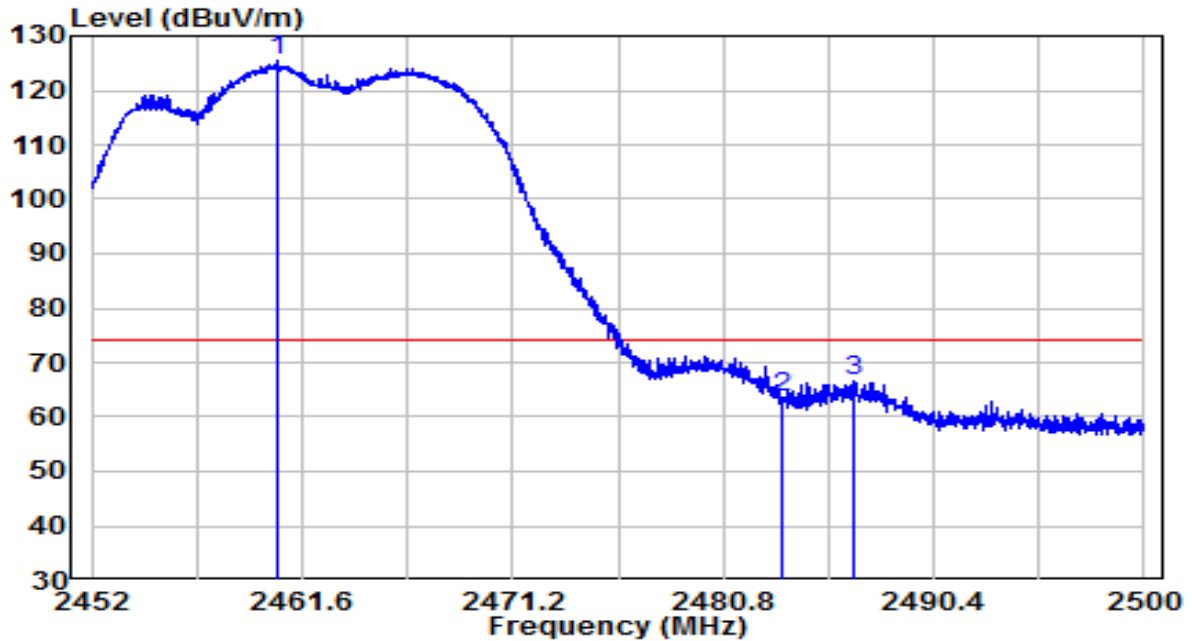


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	92.79	32.51	125.30	N/A	N/A	Peak
2		31.10	32.61	63.72	-10.28	74.00	Peak
3		33.83	32.62	66.46	-7.54	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2462MHz	Test Voltage	By PoE

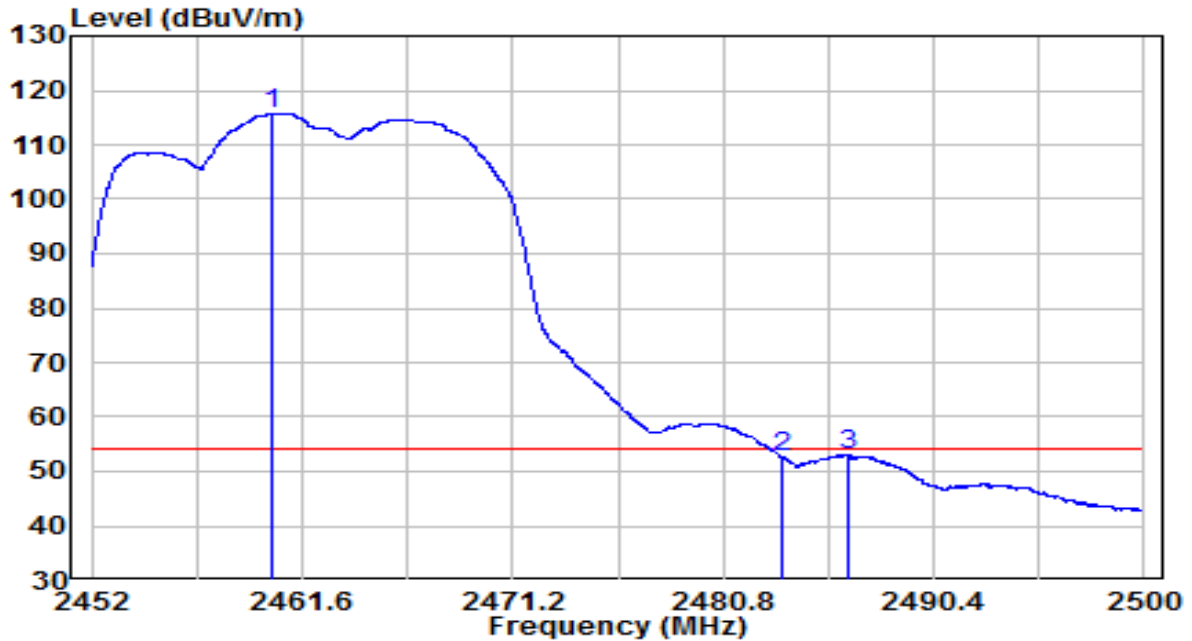


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2460.232	83.16	32.51	115.67	N/A	N/A	Average
2		2483.500	19.93	32.61	52.54	-1.46	54.00	Average
3		2486.560	20.47	32.62	53.09	-0.91	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2452MHz	Test Voltage	By PoE

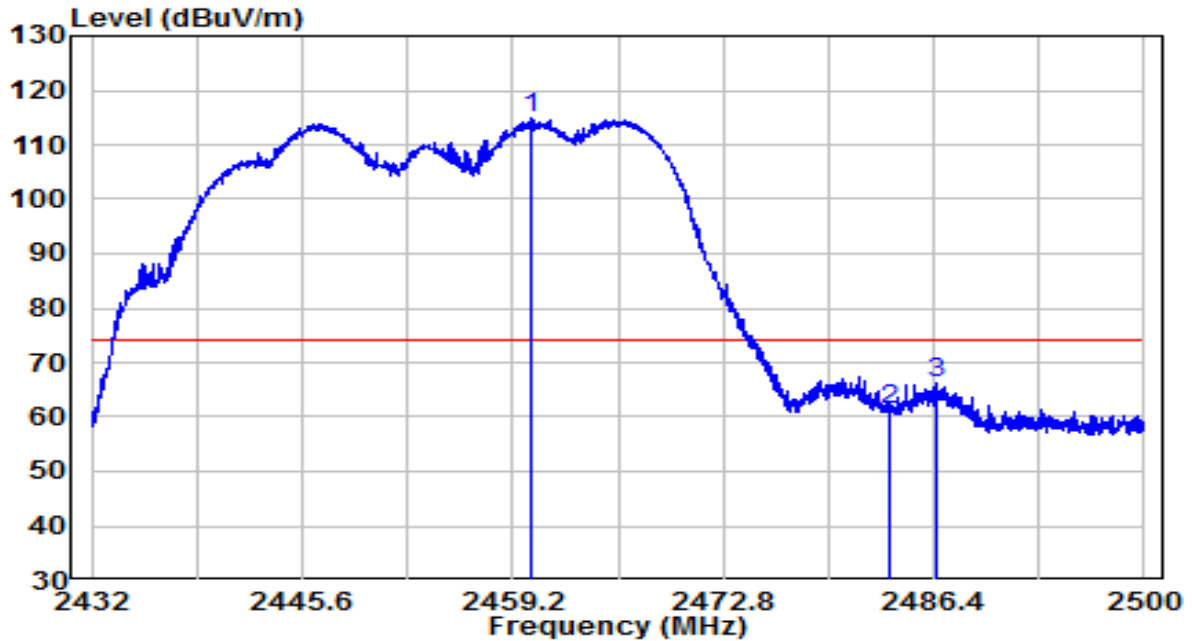


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2460.356	82.38	32.51	114.89	N/A	N/A	Peak
2	2483.500	28.88	32.61	61.49	-12.51	74.00	Peak
3	2486.536	33.53	32.62	66.16	-7.84	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2452MHz	Test Voltage	By PoE

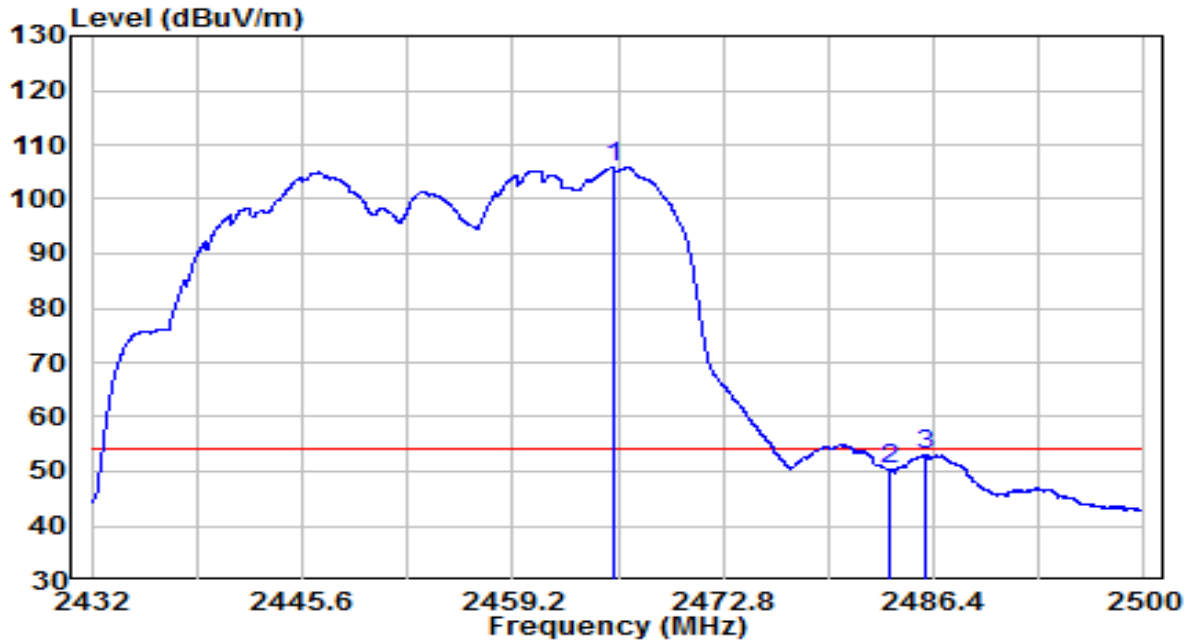


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)	
1	*	2465.660	73.22	32.54	105.76	N/A	N/A	Average
2		2483.500	17.77	32.61	50.38	-3.62	54.00	Average
3		2485.924	20.47	32.62	53.09	-0.91	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2452MHz	Test Voltage	By PoE

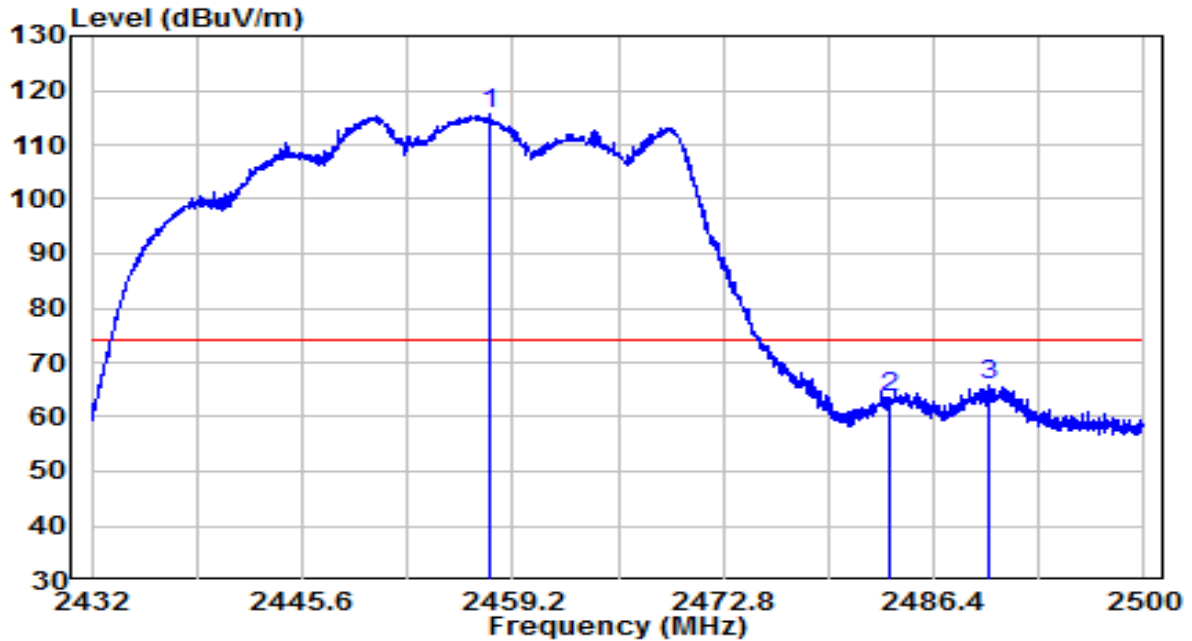


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2457.670	83.01	32.50	115.51	N/A	N/A	Peak
2		2483.500	31.00	32.61	63.61	-10.39	74.00	Peak
3		2489.902	33.10	32.64	65.74	-8.26	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2452MHz	Test Voltage	By PoE

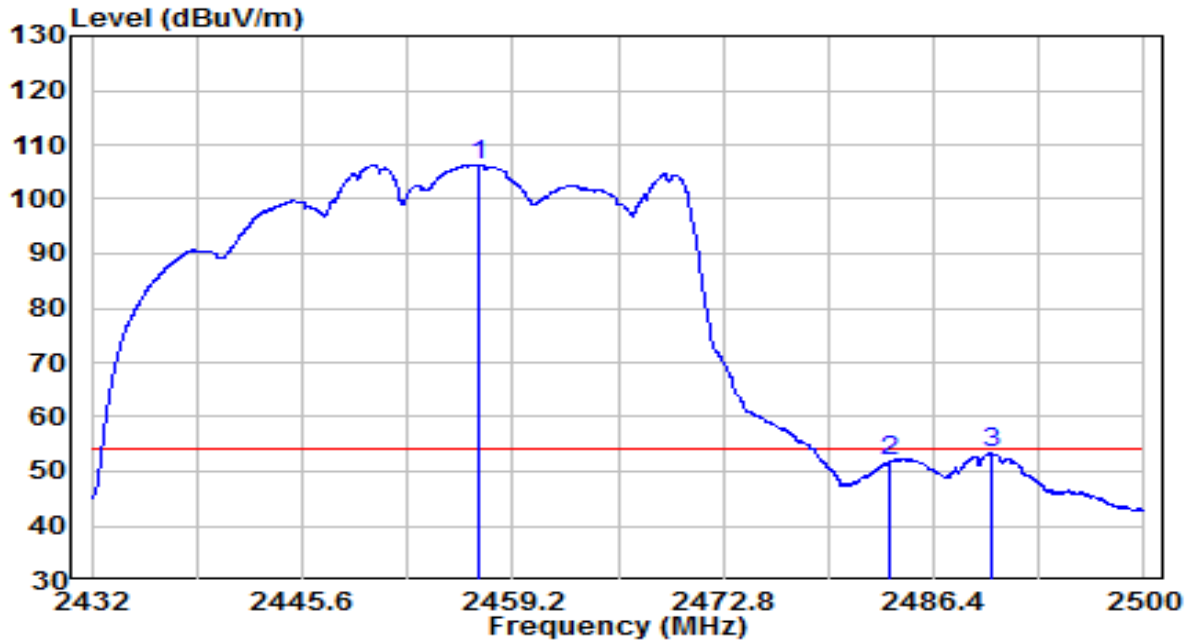


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	73.85	32.50	106.35	N/A	N/A	Average
2		19.17	32.61	51.78	-2.22	54.00	Average
3		20.63	32.64	53.27	-0.73	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz	Test Voltage	By PoE

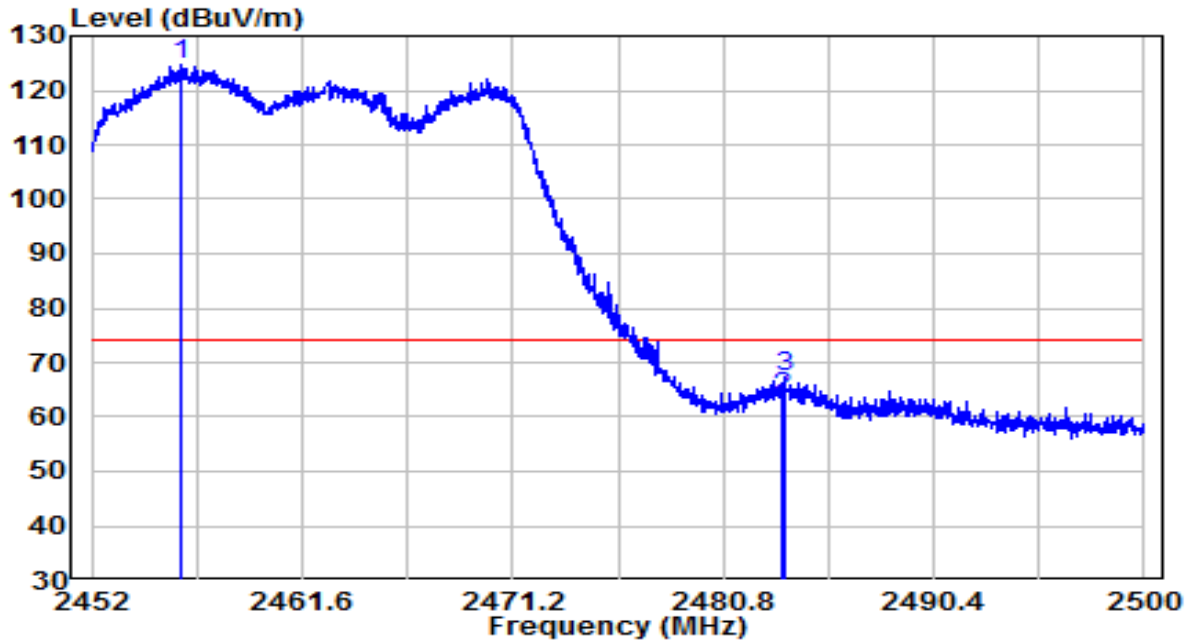


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	92.30	32.50	124.80	N/A	N/A	Peak
2		30.94	32.61	63.55	-10.45	74.00	Peak
3		34.58	32.61	67.19	-6.81	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz	Test Voltage	By PoE

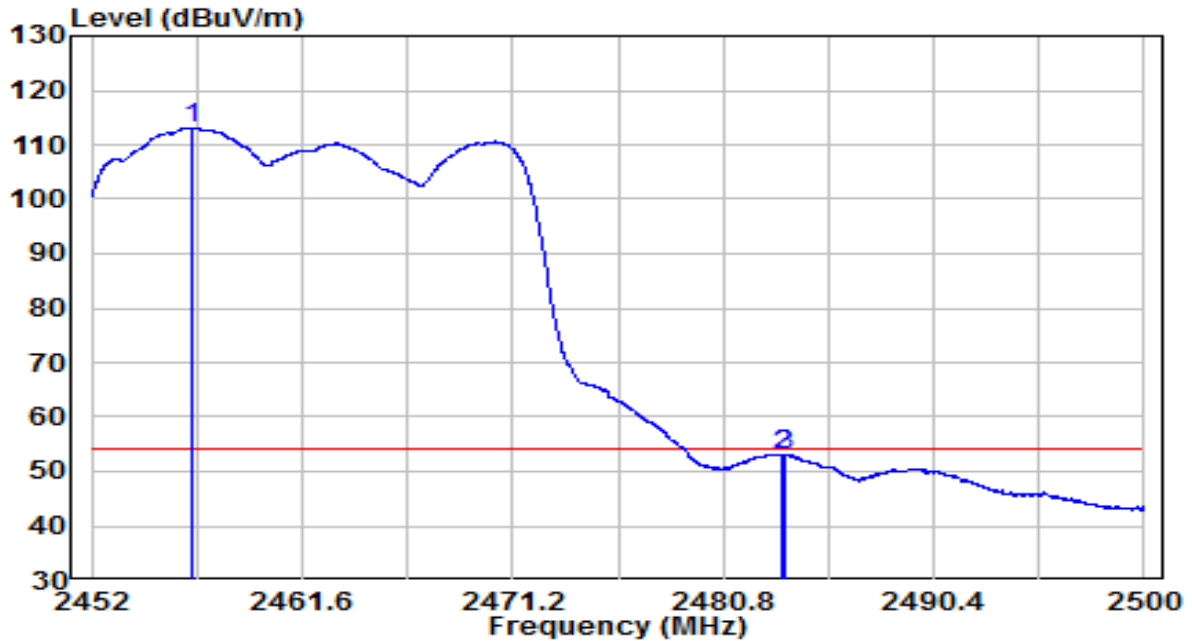


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	80.56	32.50	113.06	N/A	N/A	Average
2		20.45	32.61	53.06	-0.94	54.00	Average
3		20.52	32.61	53.13	-0.87	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz	Test Voltage	By PoE

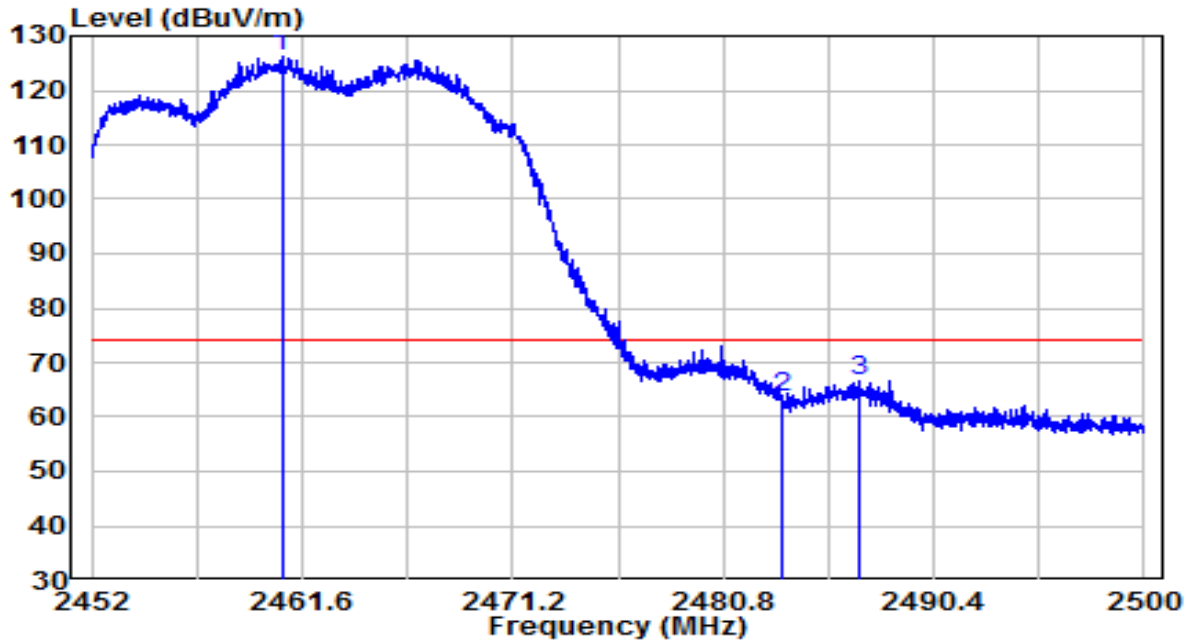


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	93.75	32.51	126.27	N/A	N/A	Peak
2		31.10	32.61	63.71	-10.29	74.00	Peak
3		34.05	32.63	66.67	-7.33	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz	Test Voltage	By PoE

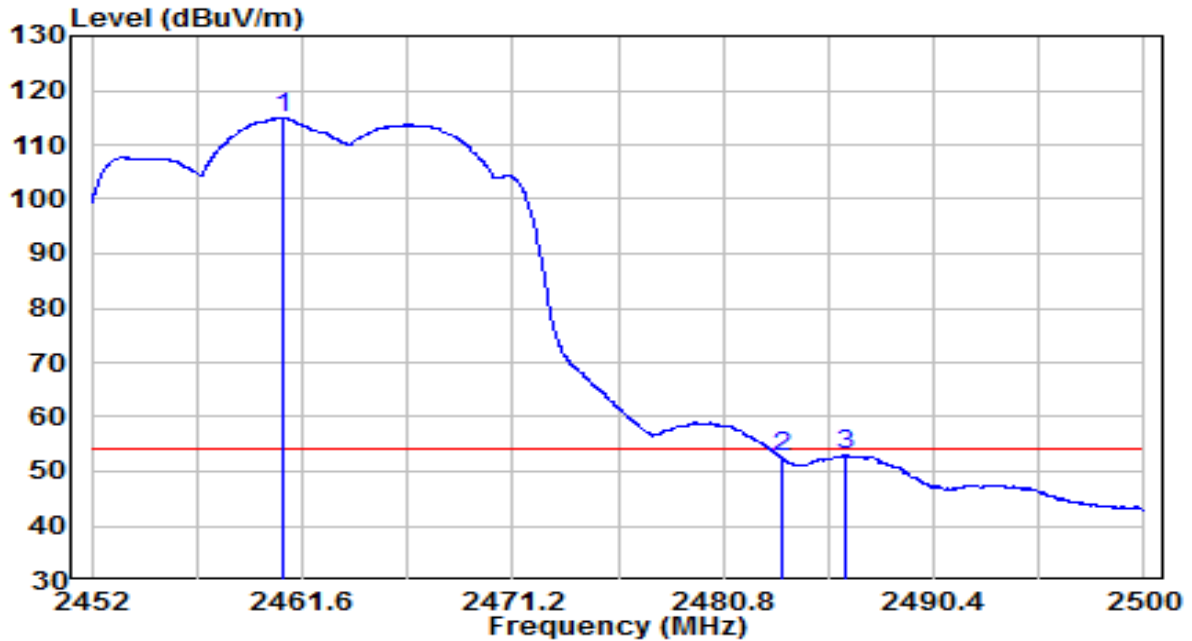


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2460.760	82.35	32.52	114.86	N/A	N/A	Average
2	2483.500	19.89	32.61	52.51	-1.49	54.00	Average
3	2486.344	20.34	32.62	52.96	-1.04	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	By PoE

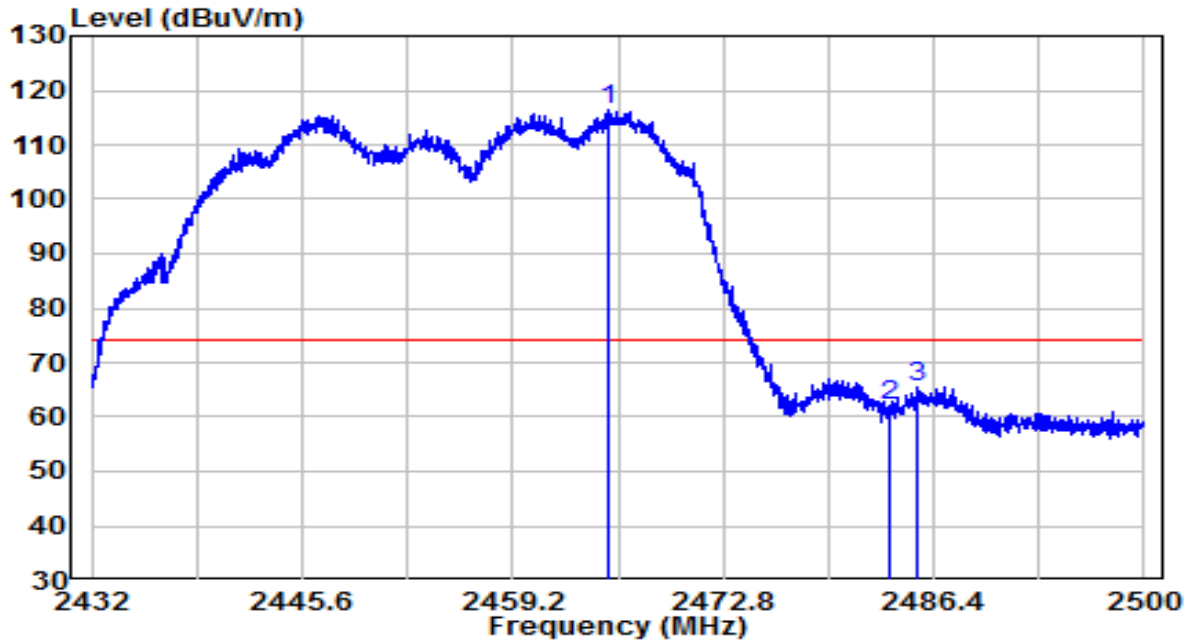


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2465.388	83.75	32.53	116.28	N/A	N/A	Peak
2	2483.500	29.51	32.61	62.12	-11.88	74.00	Peak
3	2485.380	32.83	32.62	65.45	-8.55	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	By PoE

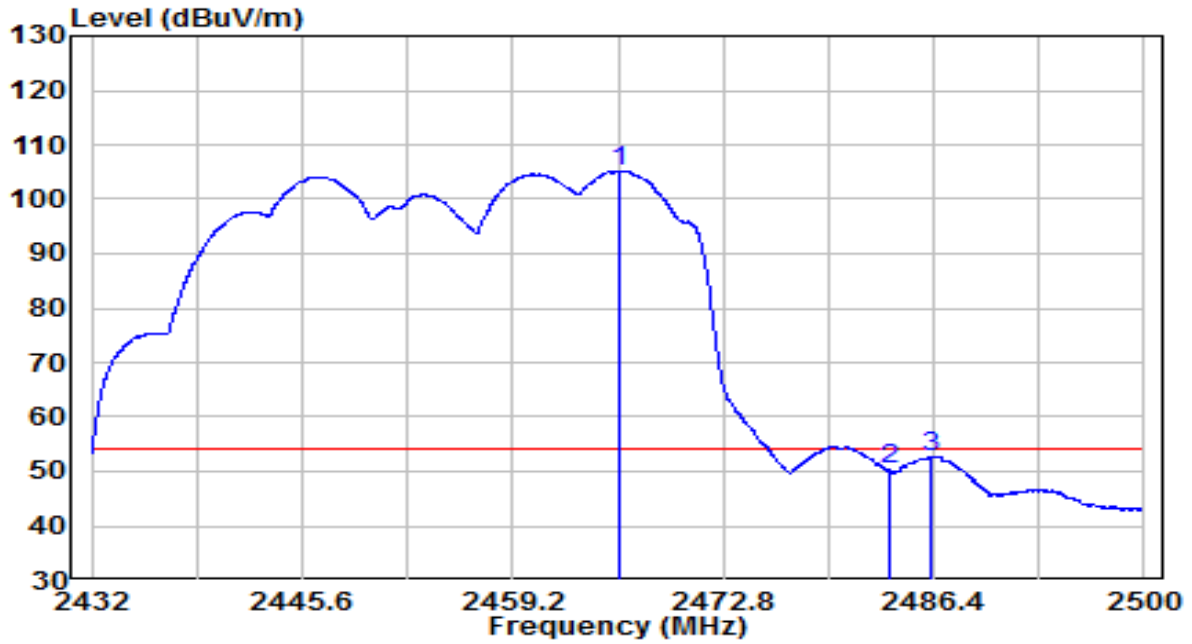


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	72.66	32.54	105.20	N/A	N/A	Average
2		17.63	32.61	50.24	-3.76	54.00	Average
3		20.19	32.62	52.81	-1.19	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	By PoE

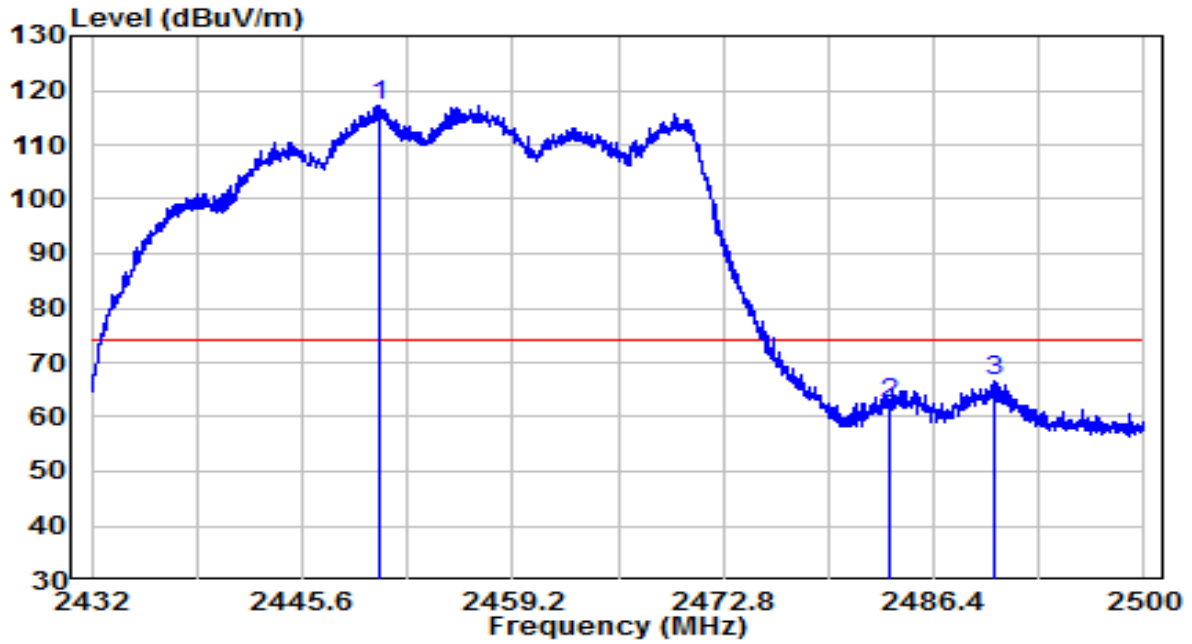


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	84.78	32.47	117.25	N/A	N/A	Peak
2		29.88	32.61	62.49	-11.51	74.00	Peak
3		34.09	32.64	66.73	-7.27	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-29
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.3°C/50.6%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	By PoE

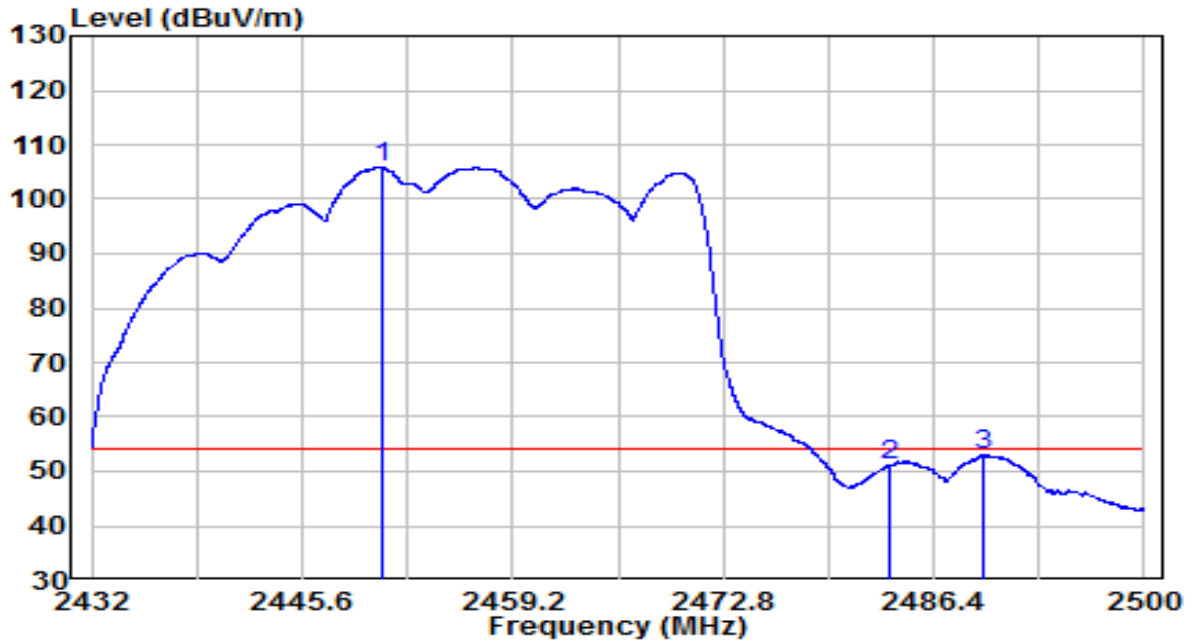


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	73.34	32.47	105.81	N/A	N/A	Average
2		18.37	32.61	50.98	-3.02	54.00	Average
3		20.44	32.64	53.08	-0.92	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

**APEX0584 Filter 1# & ANT Model No.: ANT-2x2-2005**

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2412MHz	Test Voltage	By PoE

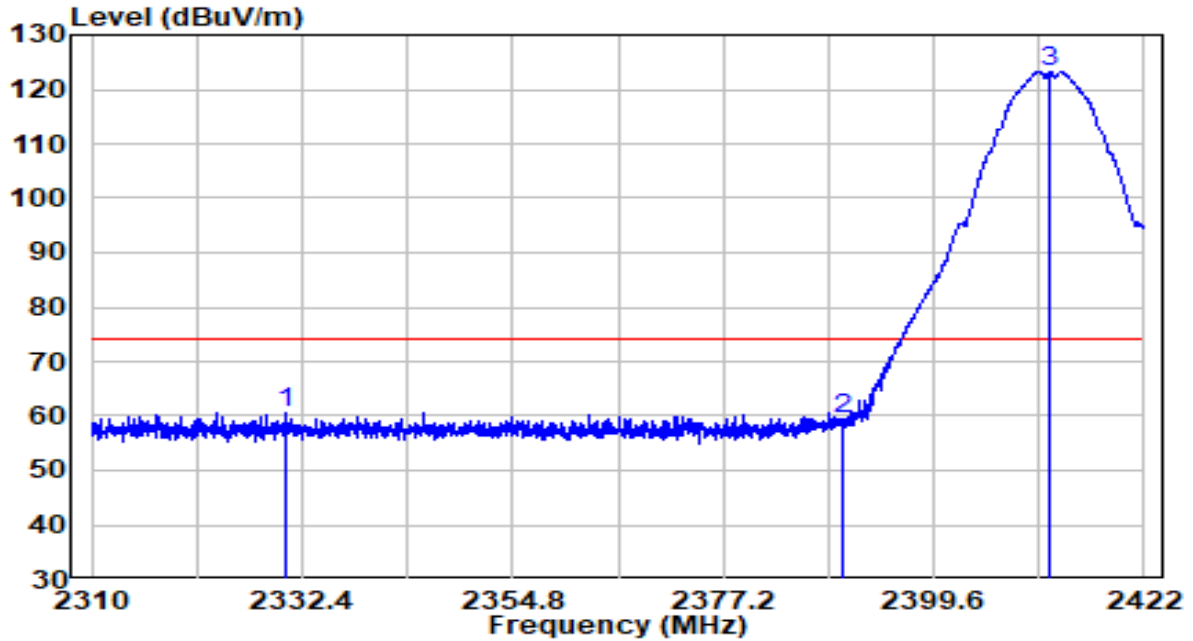


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2330.608	28.63	31.97	60.60	-13.40	74.00	Peak
2	2390.000	27.24	32.22	59.46	-14.54	74.00	Peak
3	* 2412.032	90.94	32.31	123.25	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2412MHz	Test Voltage	By PoE

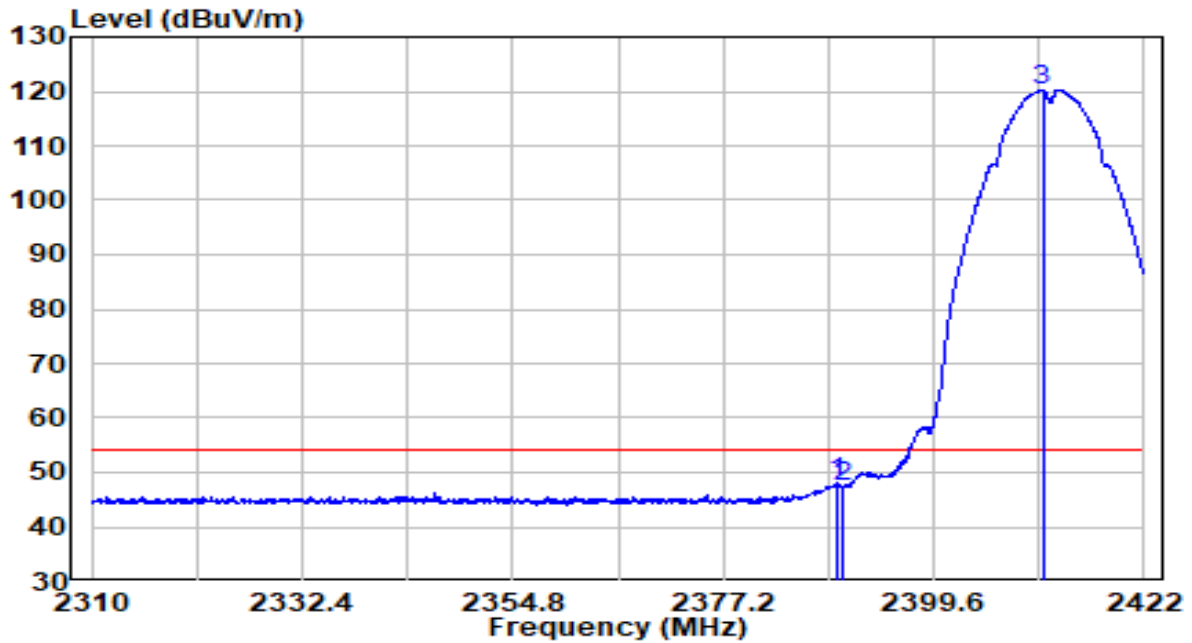


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2389.352	15.75	32.22	47.97	-6.03	54.00	Average
2	2390.000	15.10	32.22	47.31	-6.69	54.00	Average
3	* 2411.192	88.07	32.31	120.37	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2412MHz	Test Voltage	By PoE

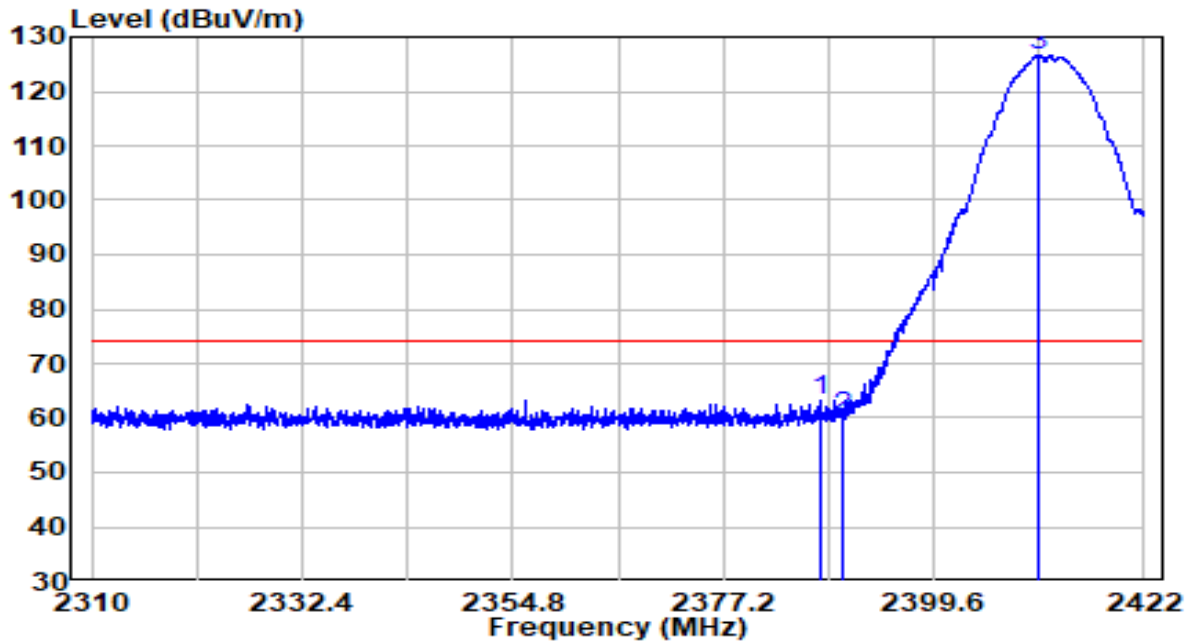


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2387.448	31.00	32.21	63.21	-10.79	74.00	Peak
2	2390.000	27.95	32.22	60.17	-13.83	74.00	Peak
3	* 2410.800	94.35	32.31	126.66	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2412MHz	Test Voltage	By PoE

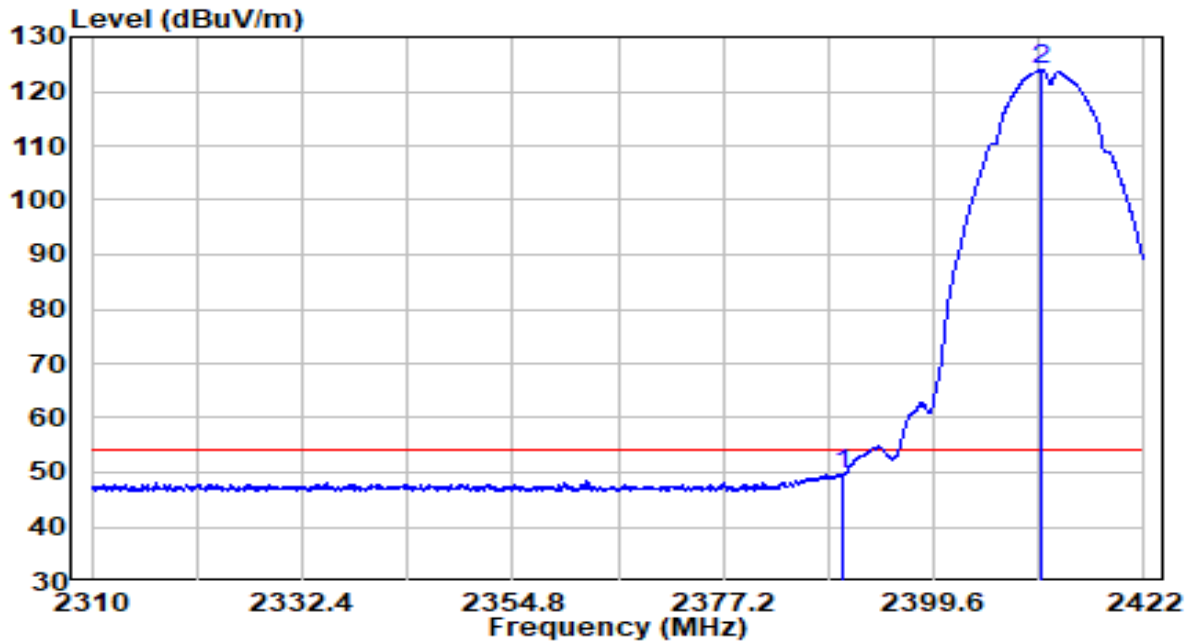


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	17.49	32.22	49.71	-4.29	54.00	Average
2	* 2411.136	91.76	32.31	124.06	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2462MHz	Test Voltage	By PoE

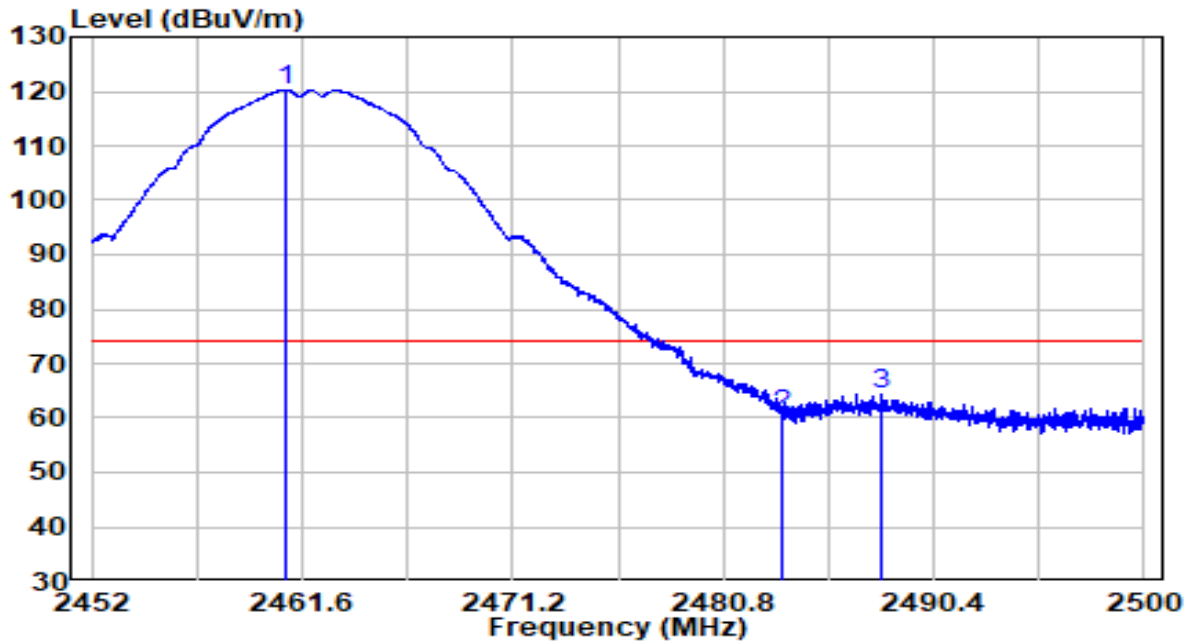


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2460.856	87.68	32.52	120.19	N/A	N/A	Peak
2	2483.500	27.88	32.61	60.49	-13.51	74.00	Peak
3	2488.000	31.56	32.63	64.19	-9.81	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2462MHz	Test Voltage	By PoE

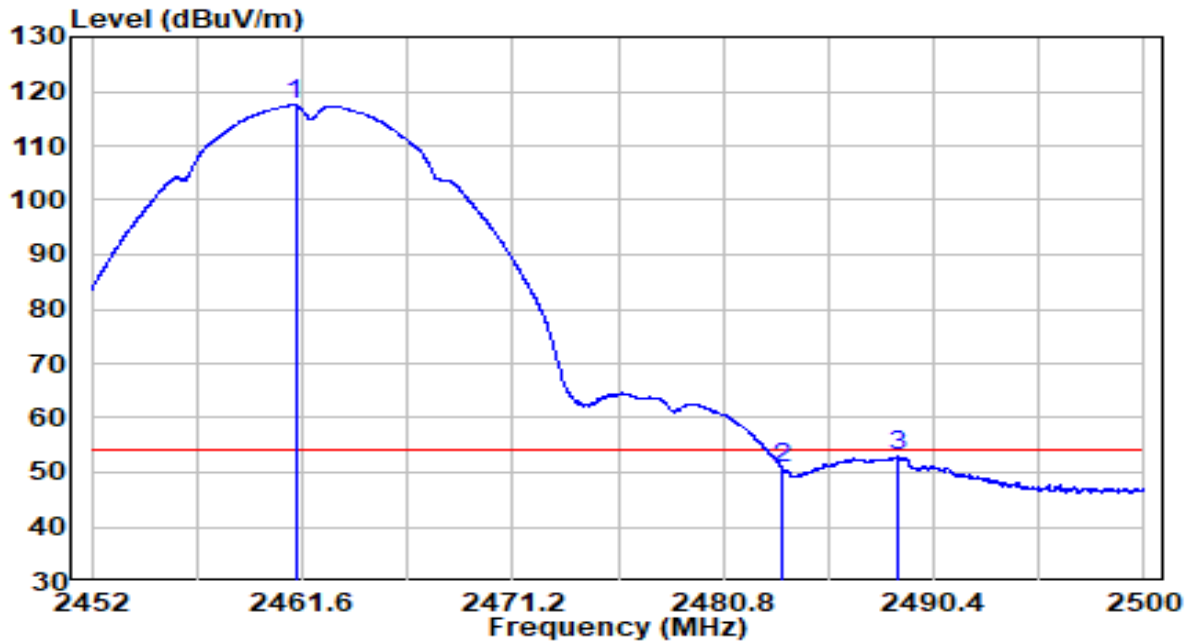


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2461.288	85.03	32.52	117.54	N/A	N/A	Average
2	2483.500	18.08	32.61	50.69	-3.31	54.00	Average
3	2488.768	20.20	32.63	52.84	-1.16	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2462MHz	Test Voltage	By PoE

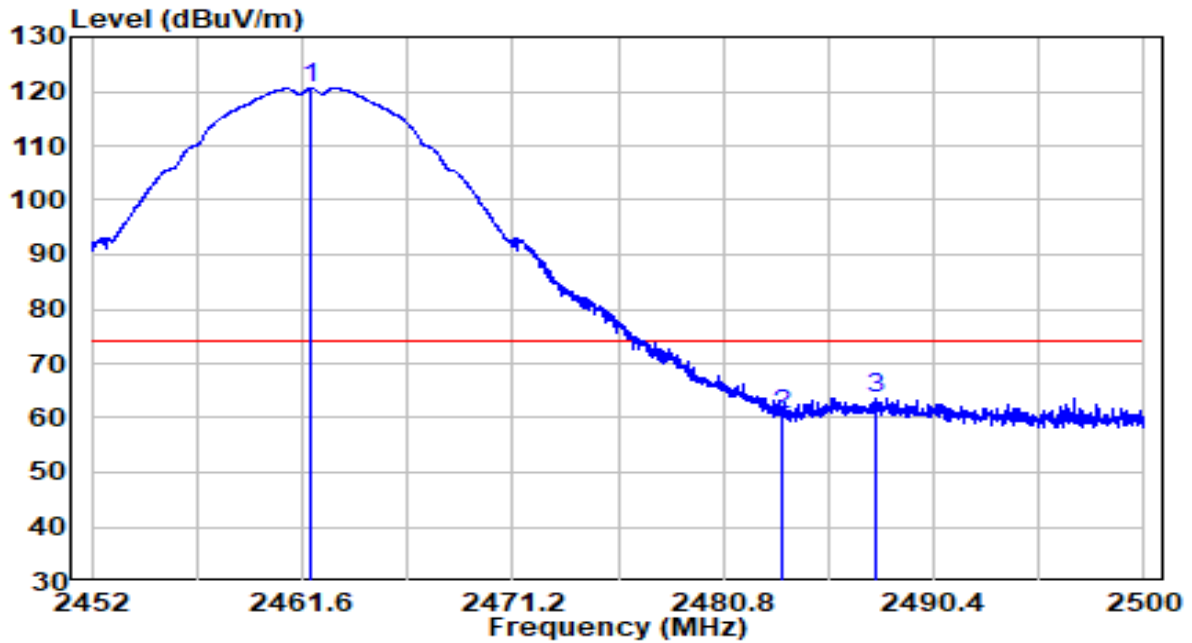


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	88.06	32.52	120.58	N/A	N/A	Peak
2		28.11	32.61	60.72	-13.28	74.00	Peak
3		31.11	32.63	63.74	-10.26	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2462MHz	Test Voltage	By PoE

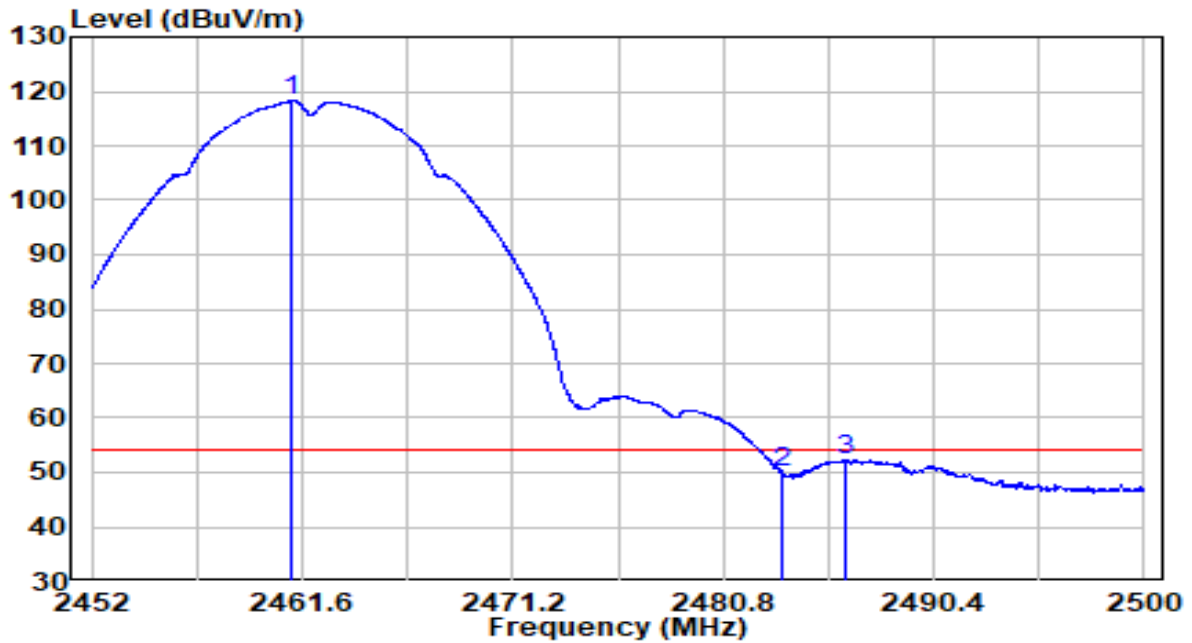


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2461.144	85.71	32.52	118.22	N/A	N/A	Average
2	2483.500	17.51	32.61	50.12	-3.88	54.00	Average
3	2486.344	19.63	32.62	52.26	-1.74	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2412MHz	Test Voltage	By PoE

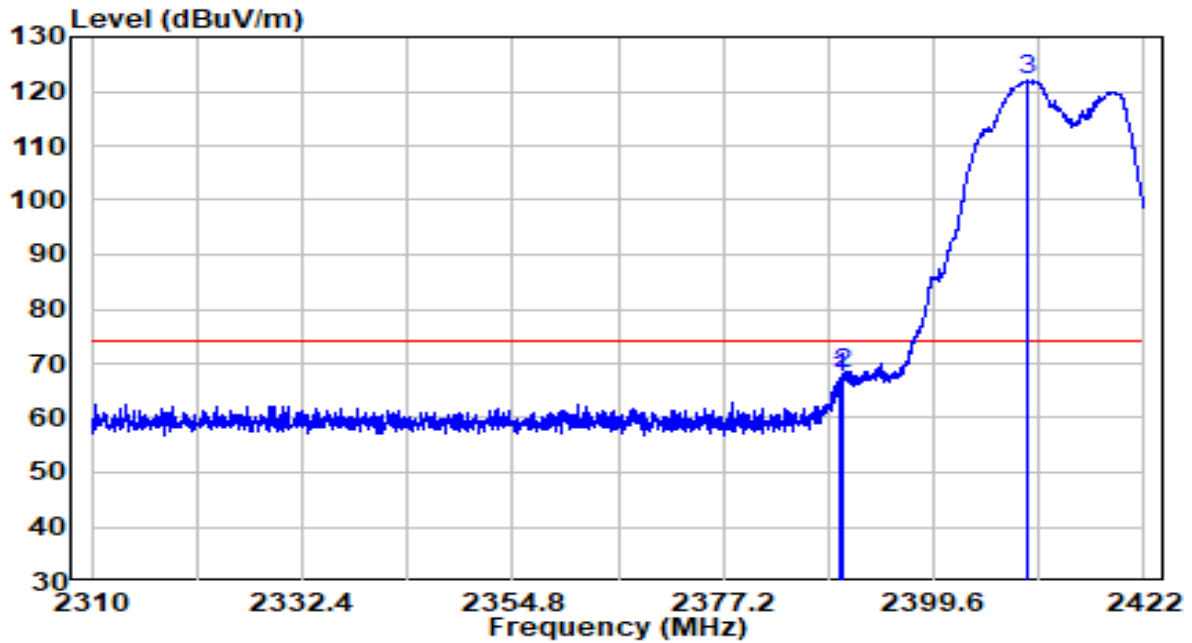


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.632	35.02	32.22	67.24	-6.76	74.00	Peak
2	2390.000	35.87	32.22	68.08	-5.92	74.00	Peak
3	* 2409.456	89.63	32.30	121.93	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2412MHz	Test Voltage	By PoE

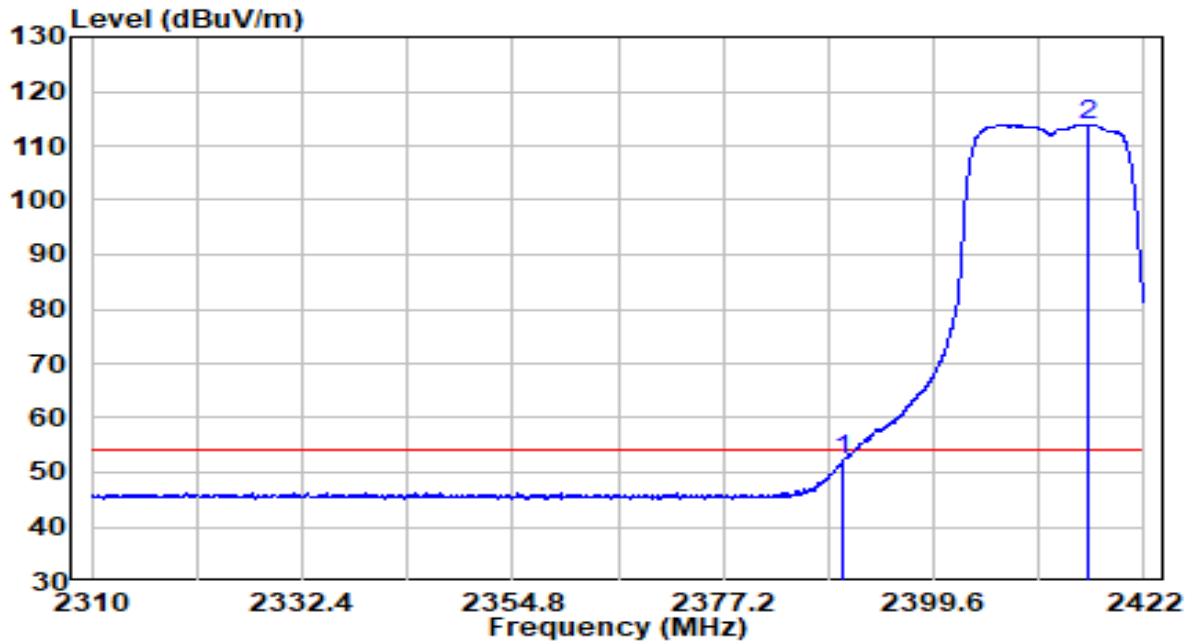


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	19.95	32.22	52.17	-1.83	54.00	Average
2	* 2416.008	81.61	32.33	113.94	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2412MHz	Test Voltage	By PoE

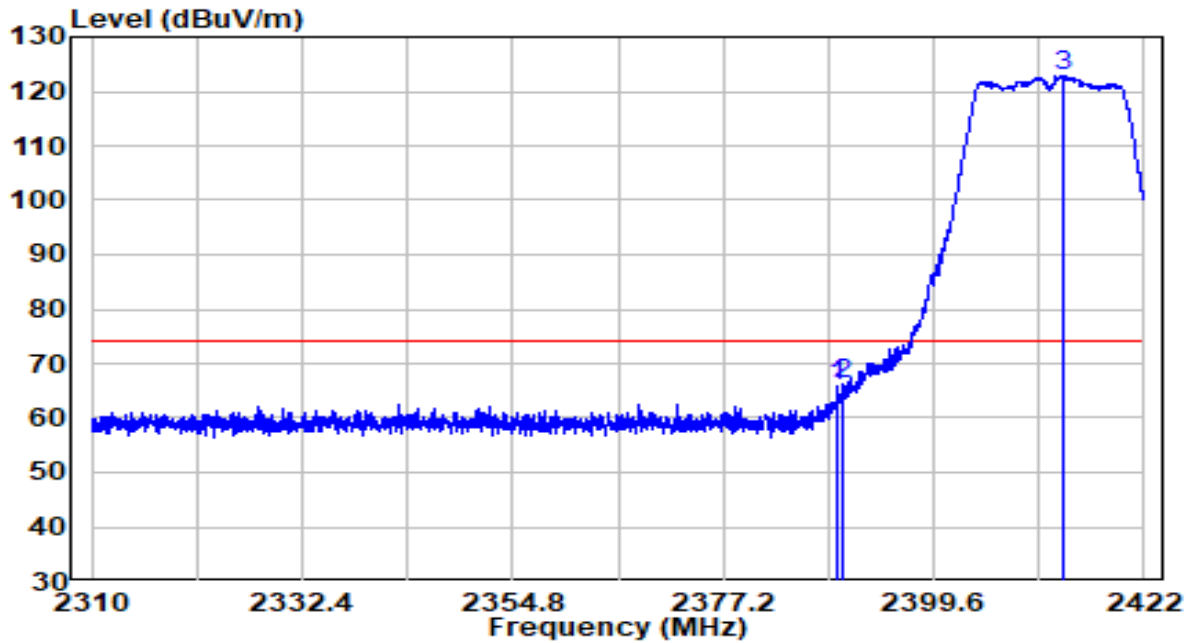


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2389.352	33.46	32.22	65.68	-8.32	74.00	Peak
2	2390.000	34.01	32.22	66.22	-7.78	74.00	Peak
3	* 2413.488	90.55	32.32	122.87	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2412MHz	Test Voltage	By PoE

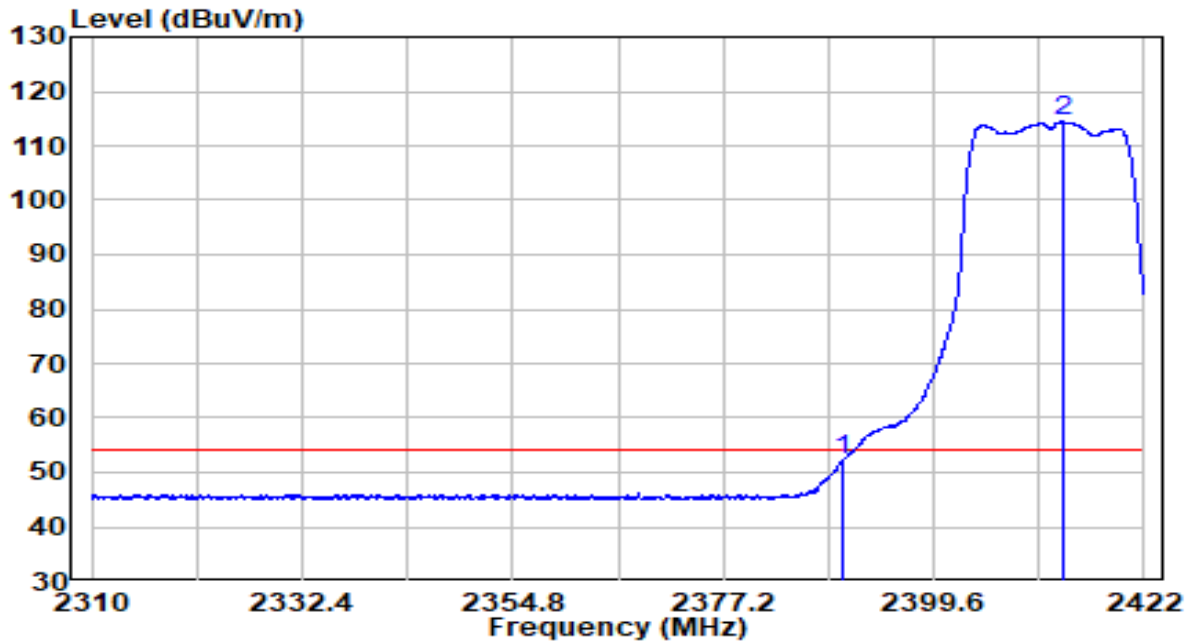


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.024	20.14	32.22	52.36	-1.64	54.00	Average
2	* 2413.488	82.05	32.32	114.37	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2452MHz	Test Voltage	By PoE

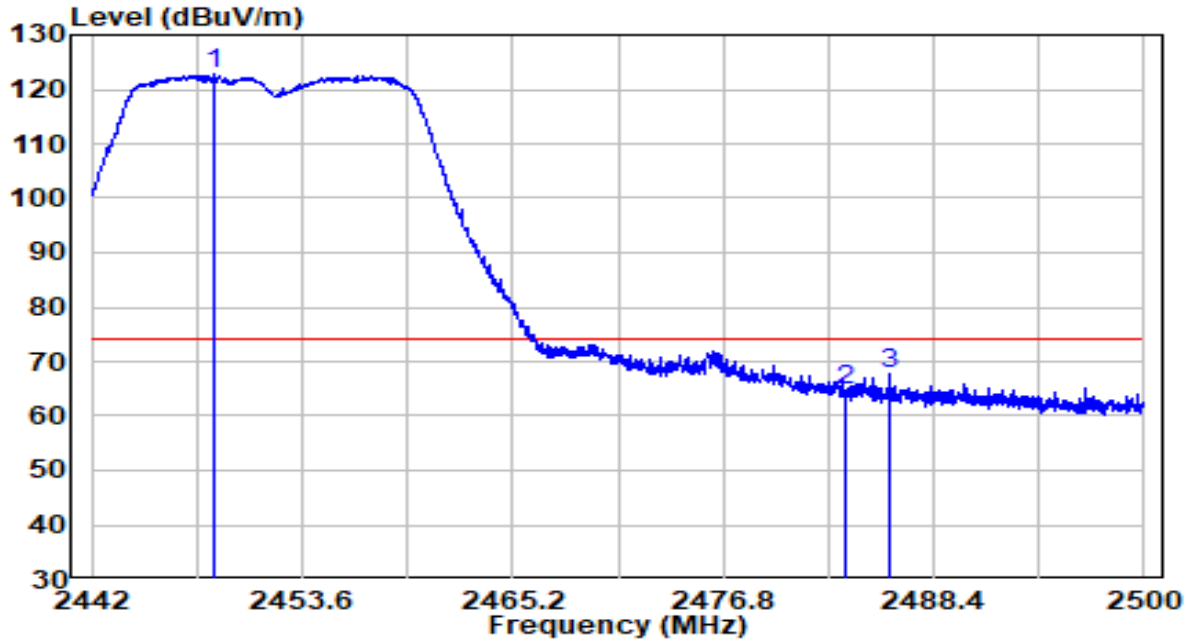


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)	
1	*	2448.699	90.31	32.46	122.77	N/A	N/A	Peak
2		2483.500	32.25	32.61	64.86	-9.14	74.00	Peak
3		2485.993	35.02	32.62	67.64	-6.36	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2452MHz	Test Voltage	By PoE

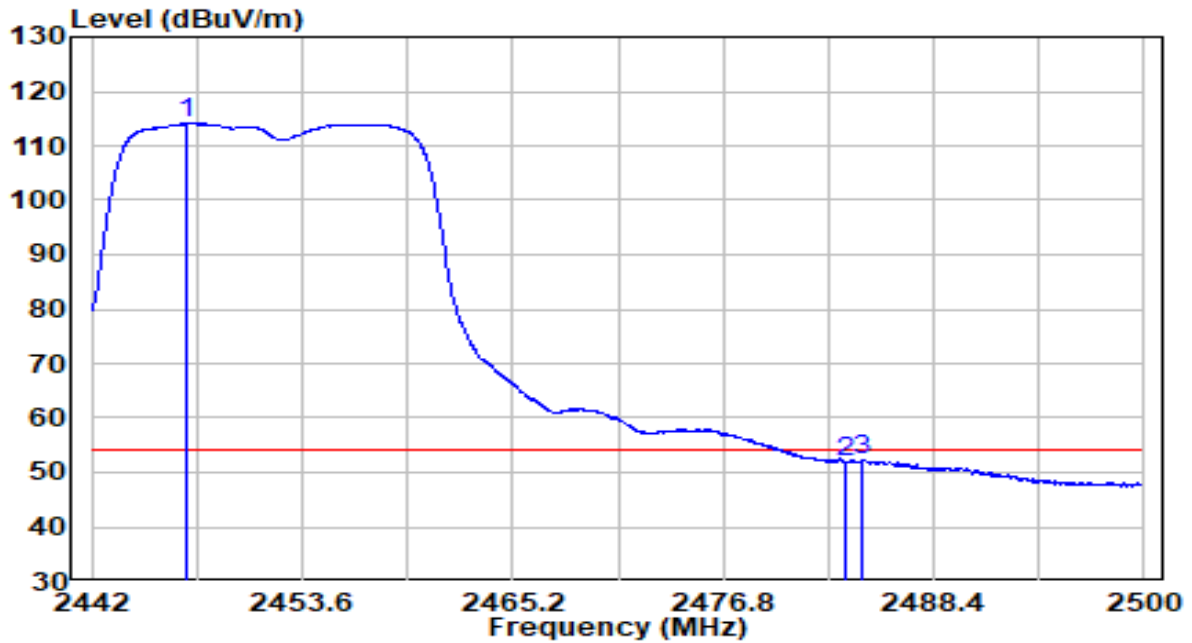


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2447.220	81.60	32.46	114.06	N/A	N/A	Average
2	2483.499	19.14	32.61	51.76	-2.24	54.00	Average
3	2484.514	19.80	32.61	52.42	-1.58	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2452MHz	Test Voltage	By PoE

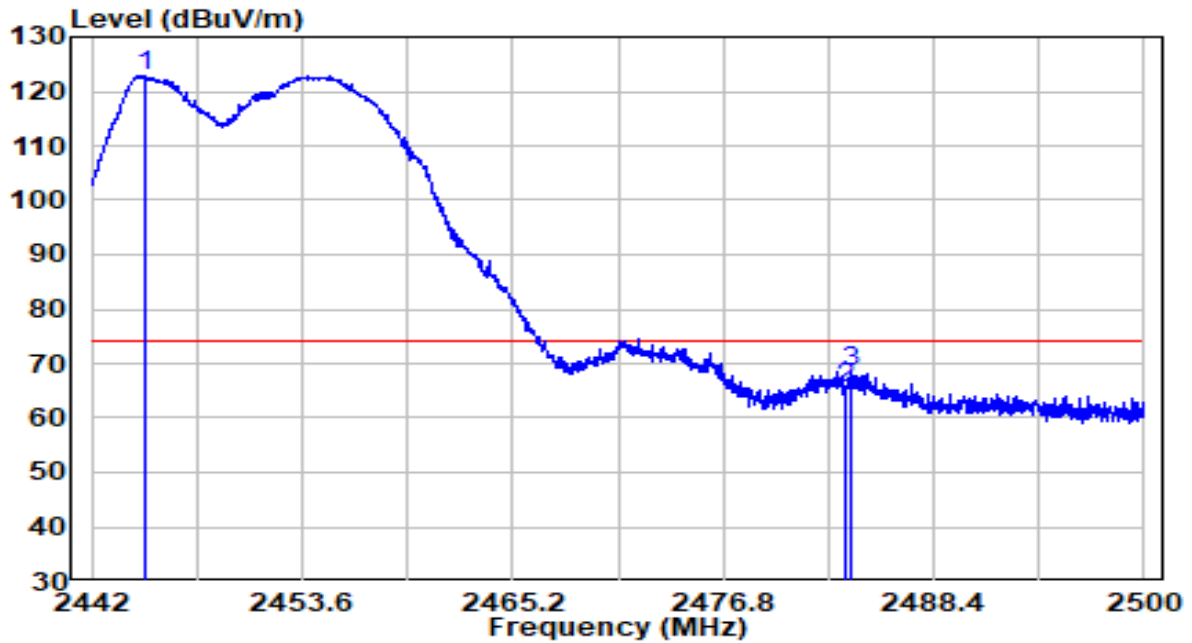


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2444.929	90.30	32.45	122.75	N/A	N/A	Peak
2	2483.500	32.75	32.61	65.37	-8.63	74.00	Peak
3	2483.847	35.69	32.61	68.30	-5.70	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2452MHz	Test Voltage	By PoE

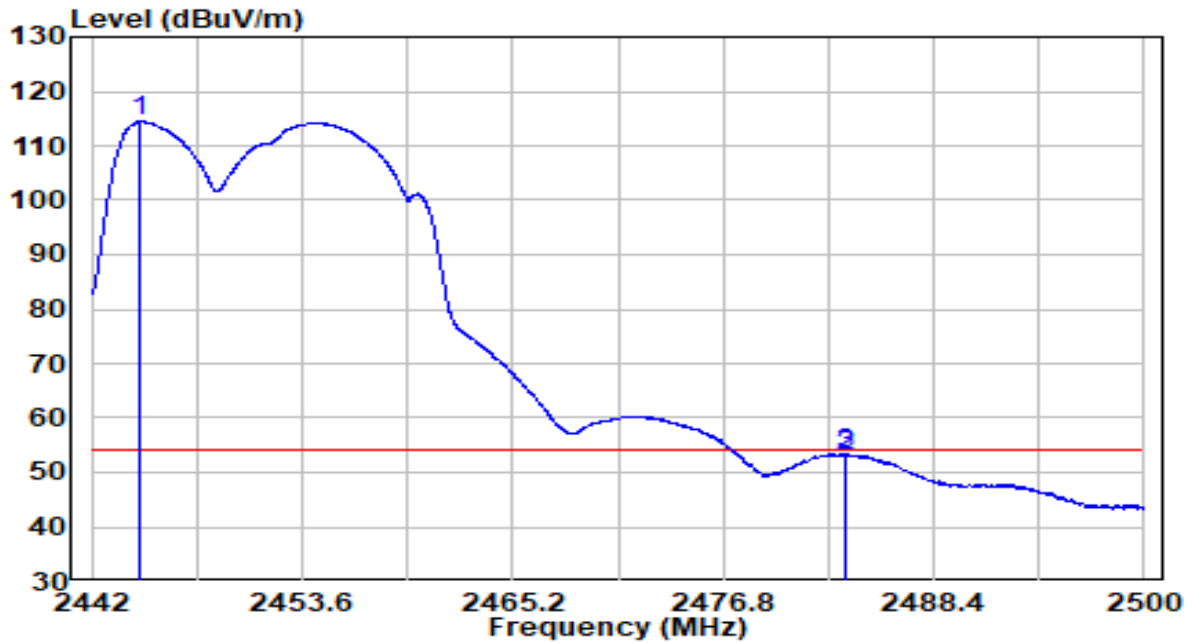


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2444.697	81.98	32.45	114.42	N/A	N/A	Average
2	2483.500	20.59	32.61	53.20	-0.80	54.00	Average
3	2483.586	20.76	32.61	53.37	-0.63	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2457MHz	Test Voltage	By PoE

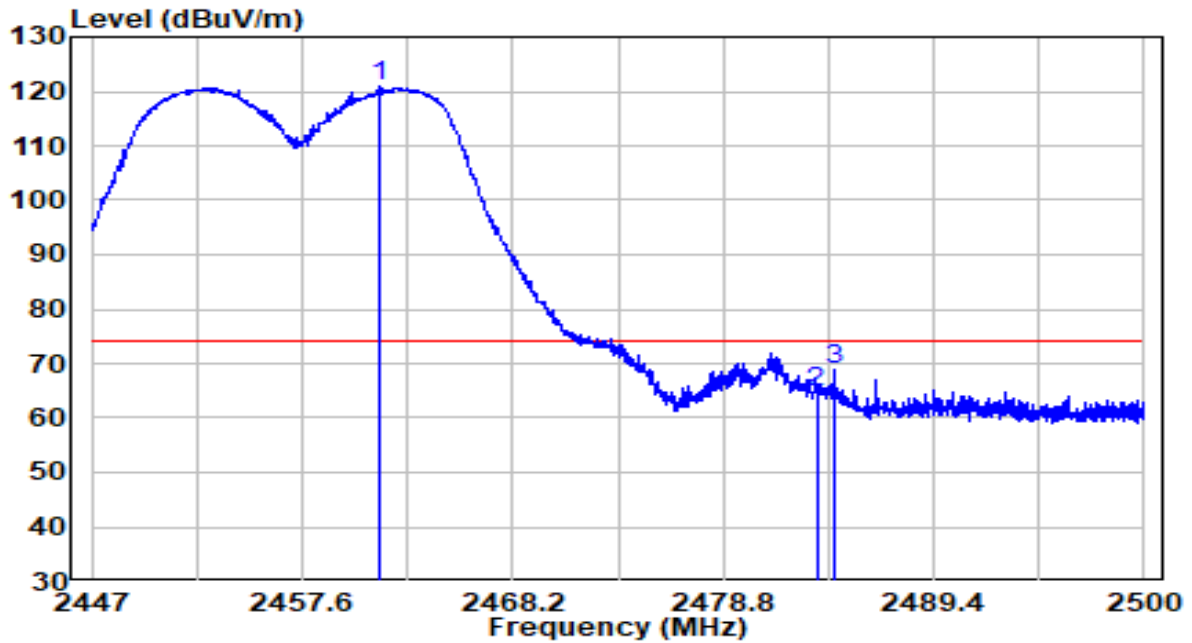


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)	
1	*	2461.522	88.31	32.52	120.83	N/A	N/A	Peak
2		2483.500	32.23	32.61	64.84	-9.16	74.00	Peak
3		2484.418	36.35	32.61	68.96	-5.04	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2457MHz	Test Voltage	By PoE

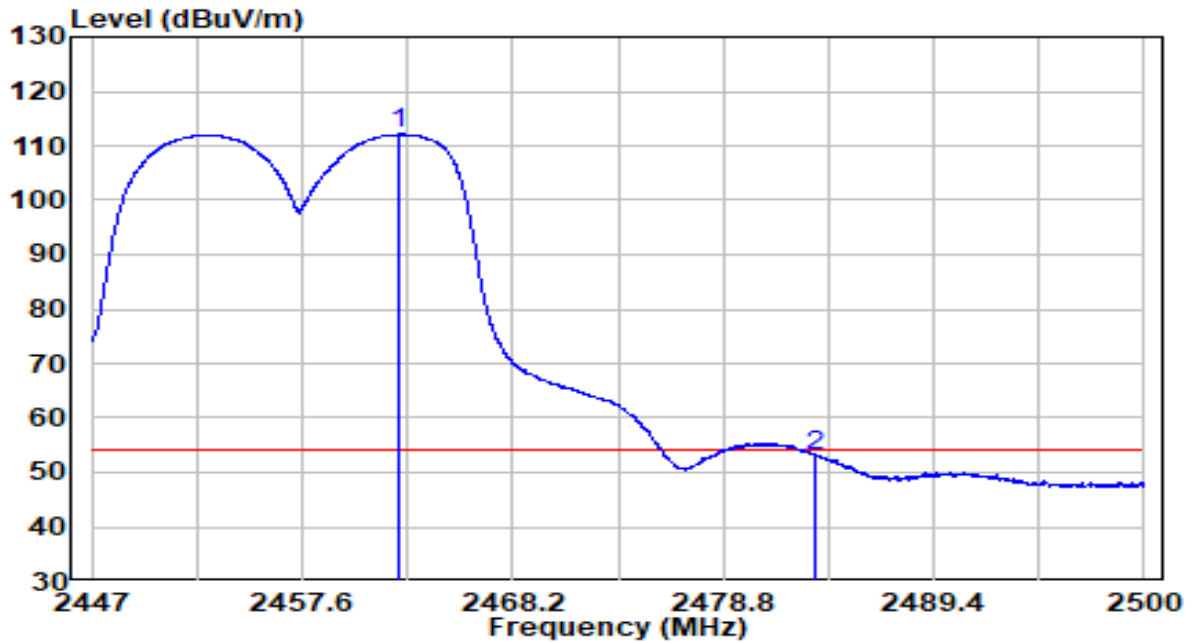


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2462.449	79.57	32.52	112.09	N/A	N/A	Average
2		2483.490	20.55	32.61	53.17	-0.83	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2457MHz	Test Voltage	By PoE

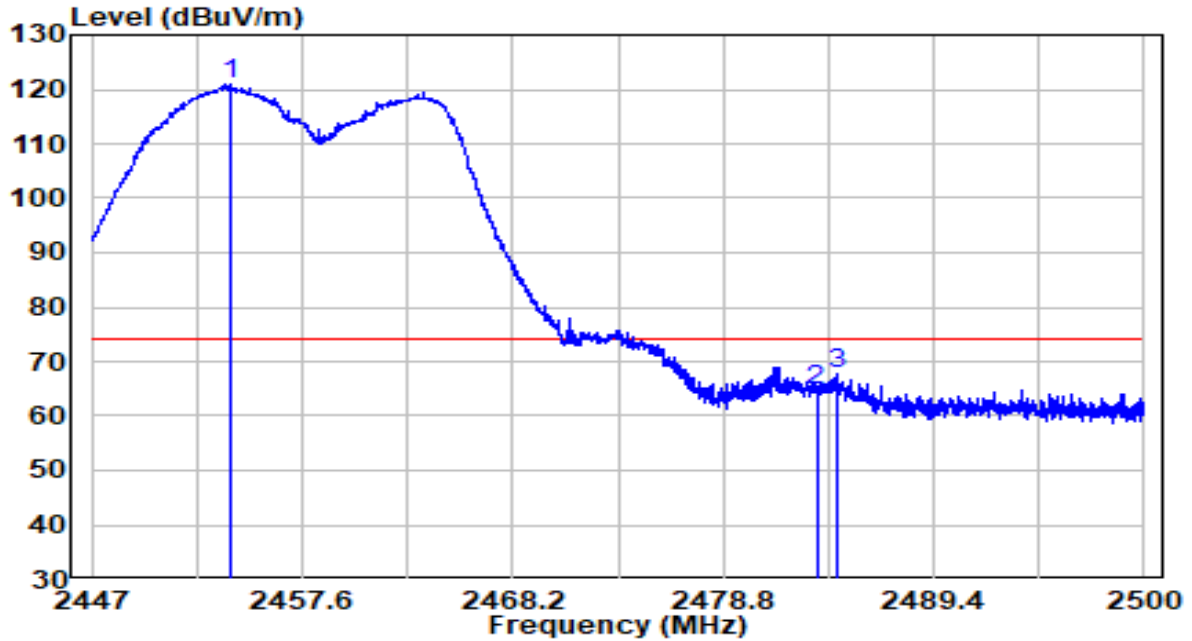


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2453.943	88.39	32.49	120.87	N/A	N/A	Peak
2	2483.500	32.21	32.61	64.82	-9.18	74.00	Peak
3	2484.551	35.18	32.62	67.80	-6.20	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2457MHz	Test Voltage	By PoE

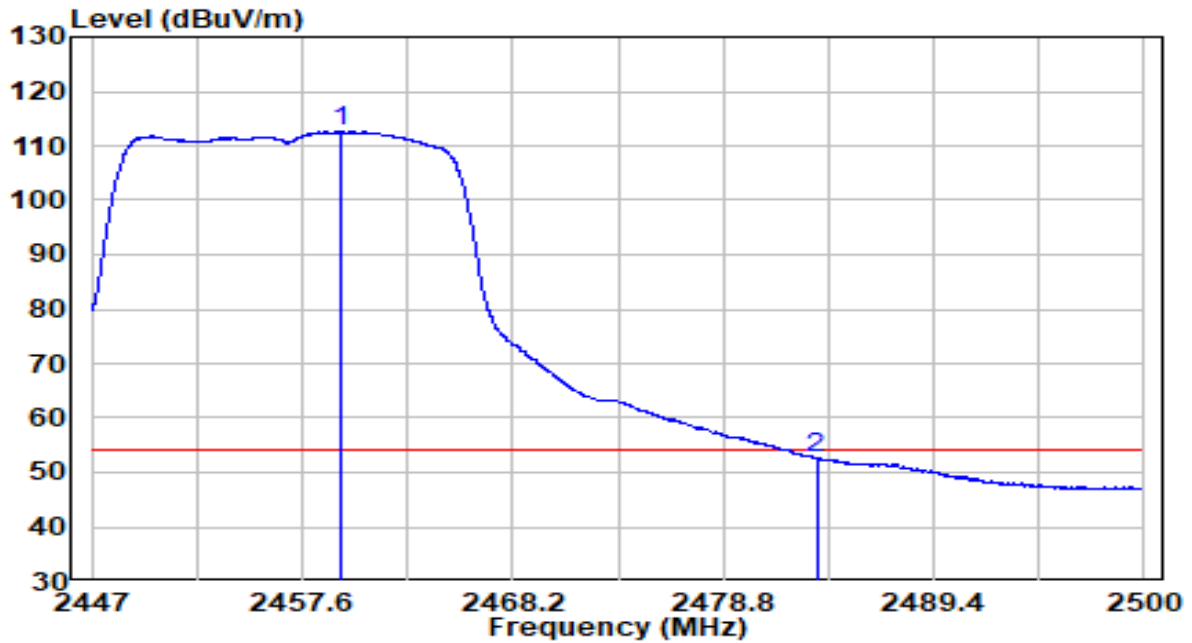


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2459.587	80.03	32.51	112.54	N/A	N/A	Average
2	2483.500	19.99	32.61	52.60	-1.40	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2462MHz	Test Voltage	By PoE

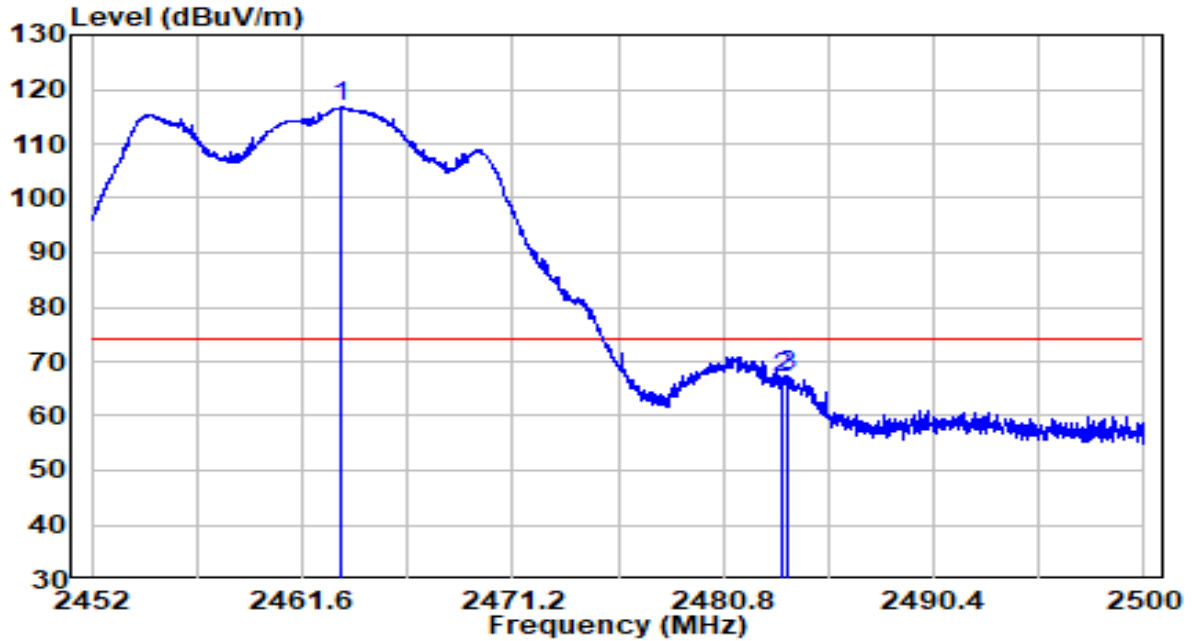


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2463.400	84.12	32.53	116.65	N/A	N/A	Peak
2	2483.500	34.28	32.61	66.89	-7.11	74.00	Peak
3	2483.704	34.69	32.61	67.30	-6.70	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2462MHz	Test Voltage	By PoE

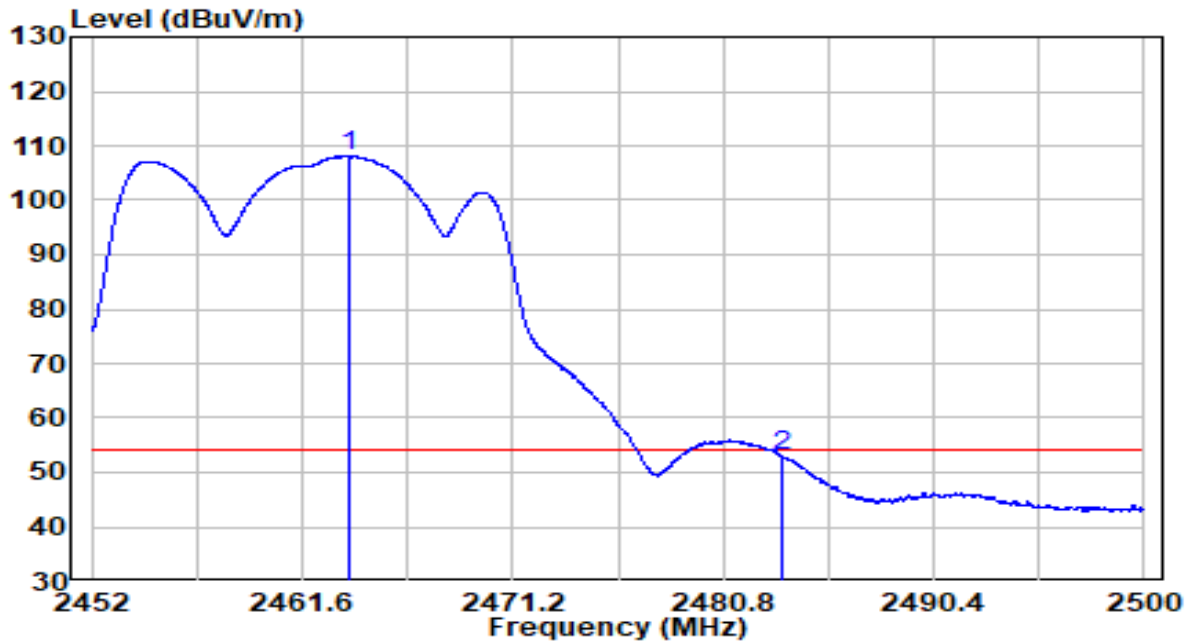


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2463.712	75.51	32.53	108.04	N/A	N/A	Average
2		2483.500	20.40	32.61	53.01	-0.99	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2462MHz	Test Voltage	By PoE

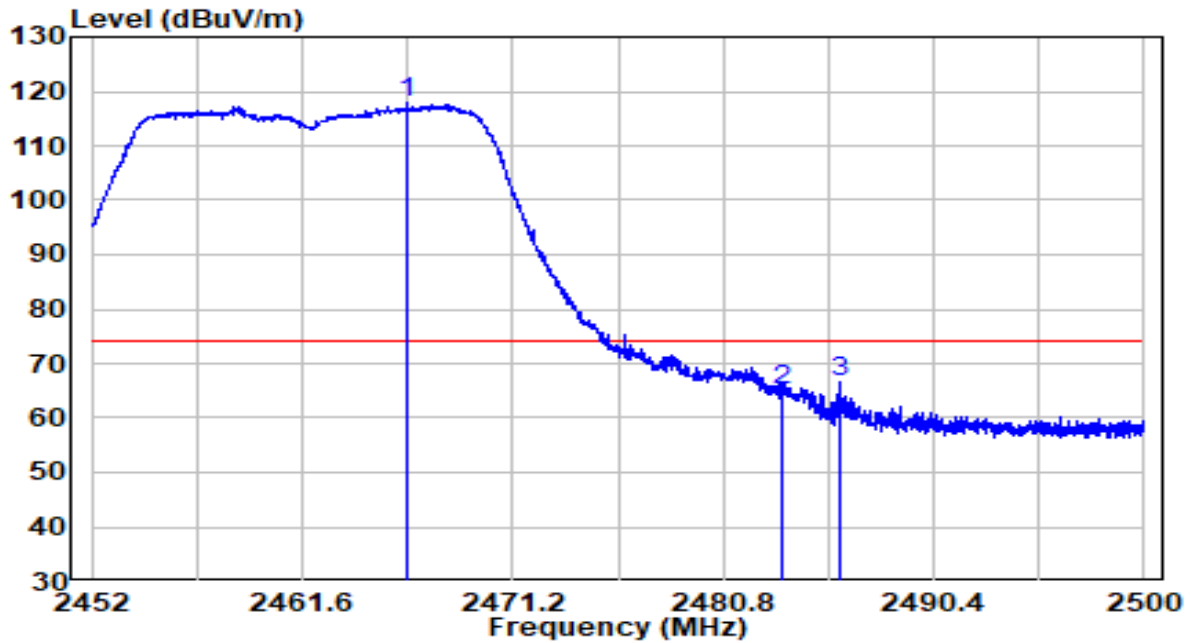


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)	
1	*	2466.376	85.50	32.54	118.04	N/A	N/A	Peak
2		2483.500	32.47	32.61	65.08	-8.92	74.00	Peak
3		2486.176	33.81	32.62	66.44	-7.56	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2462MHz	Test Voltage	By PoE

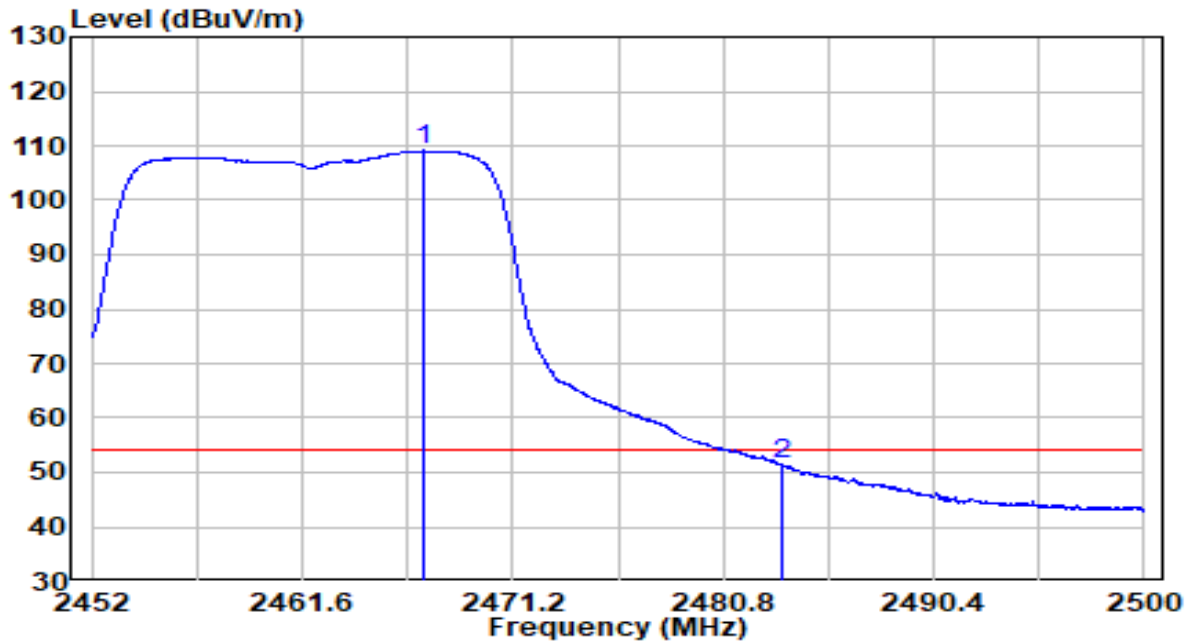


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2467.192	76.52	32.54	109.06	N/A	N/A	Average
2	2483.500	18.82	32.61	51.43	-2.57	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2412MHz	Test Voltage	By PoE

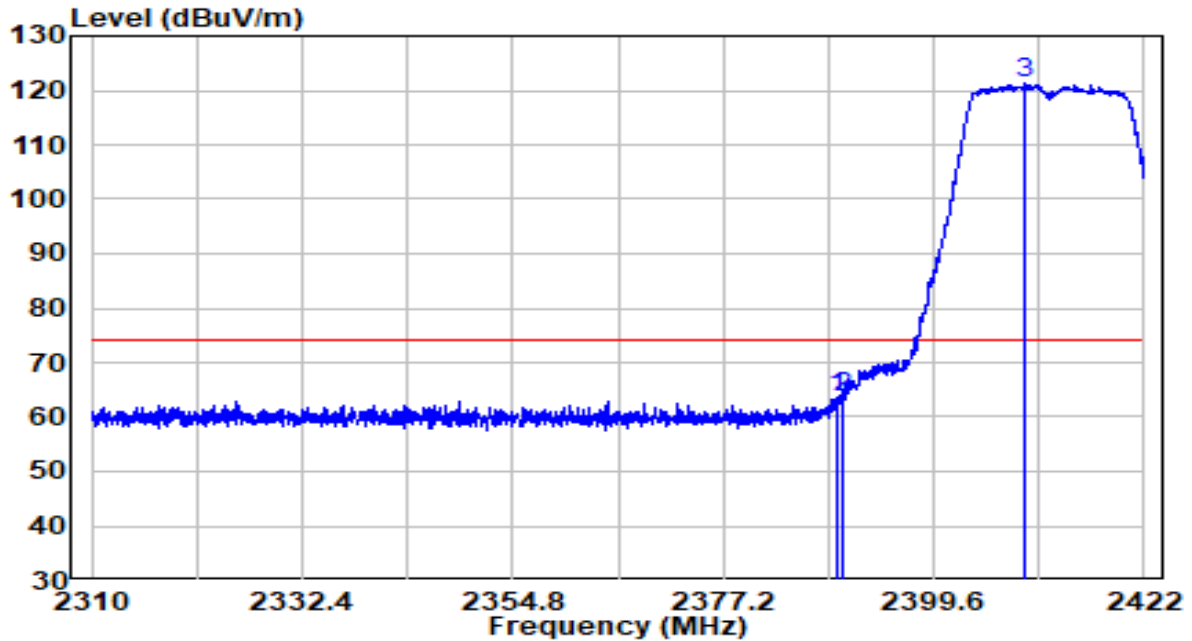


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.296	31.39	32.22	63.60	-10.40	74.00	Peak
2	2390.000	31.36	32.22	63.57	-10.43	74.00	Peak
3	* 2409.288	88.98	32.30	121.28	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2412MHz	Test Voltage	By PoE

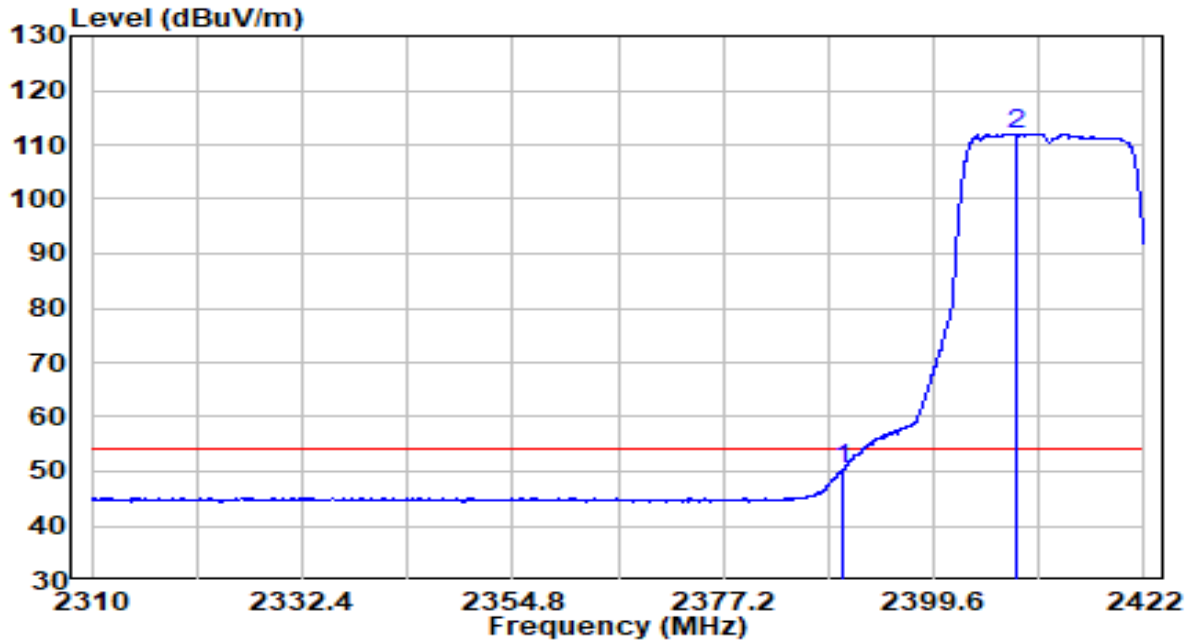


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	18.19	32.22	50.41	-3.59	54.00	Average
2	* 2408.280	79.76	32.29	112.06	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2412MHz	Test Voltage	By PoE

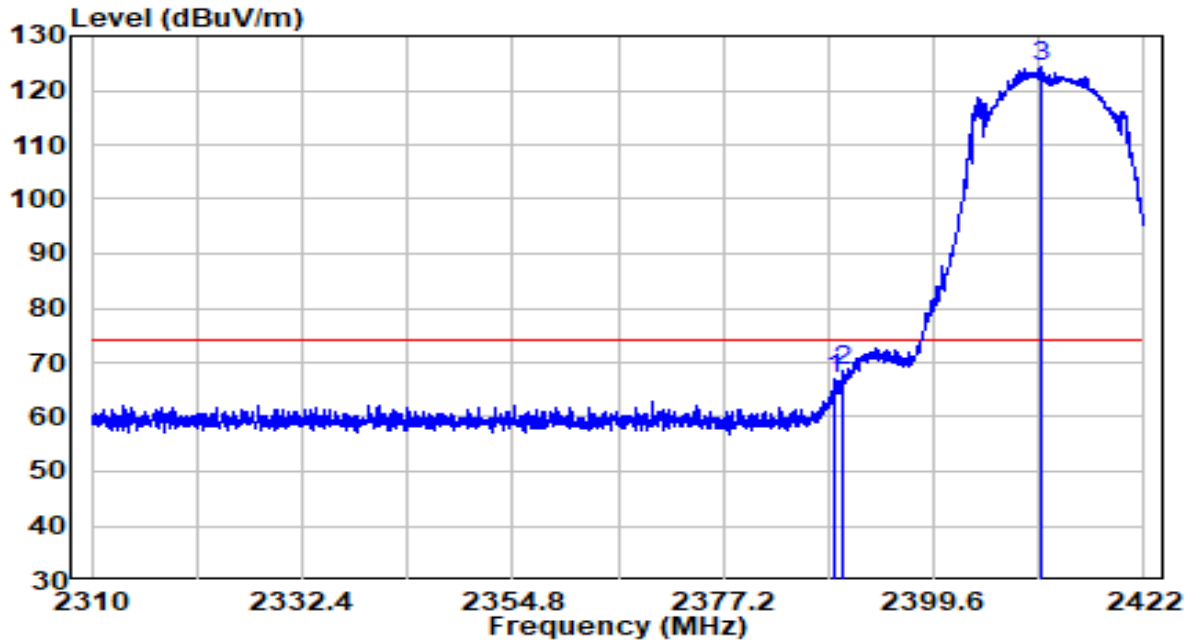


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.128	34.77	32.21	66.98	-7.02	74.00	Peak
2	2390.000	36.19	32.22	68.41	-5.59	74.00	Peak
3	* 2411.136	92.22	32.31	124.53	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2412MHz	Test Voltage	By PoE

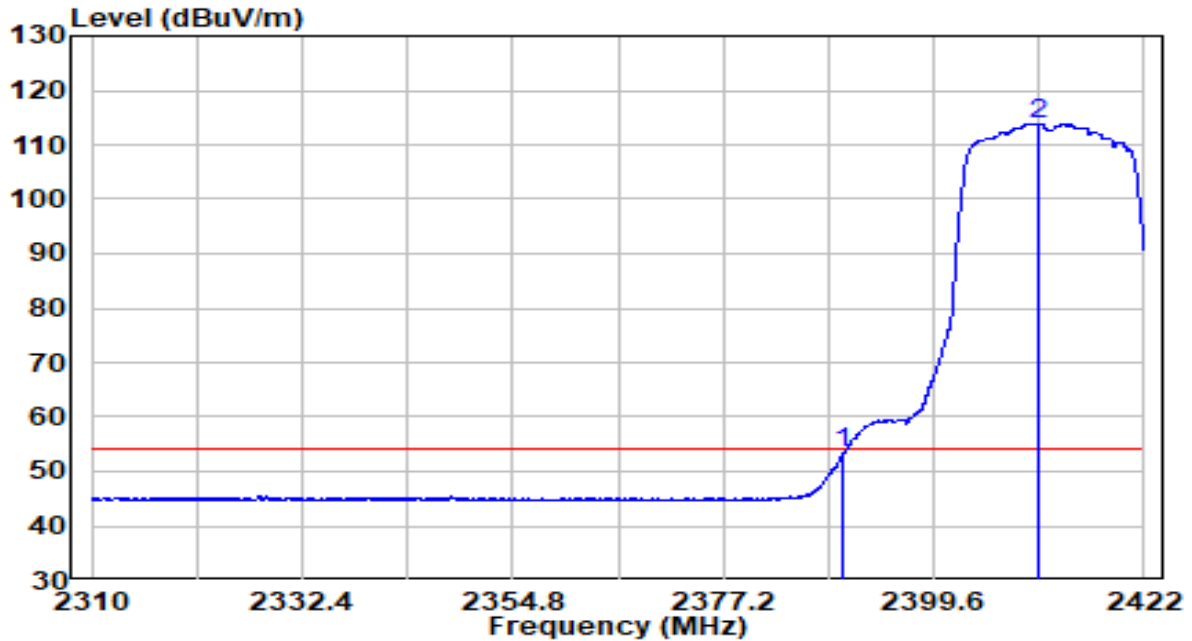


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.024	21.19	32.22	53.41	-0.59	54.00	Average
2	* 2410.688	81.59	32.30	113.89	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2452MHz	Test Voltage	By PoE

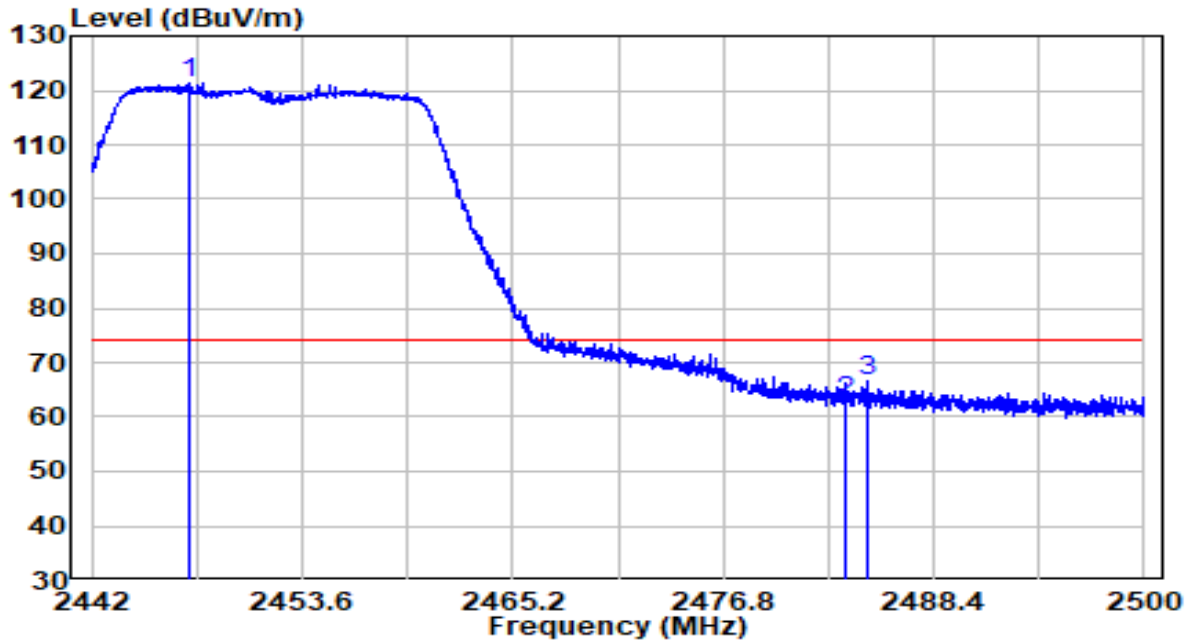


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2447.423	88.88	32.46	121.34	N/A	N/A	Peak
2	2483.500	30.06	32.61	62.67	-11.33	74.00	Peak
3	2484.688	33.85	32.62	66.46	-7.54	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2452MHz	Test Voltage	By PoE

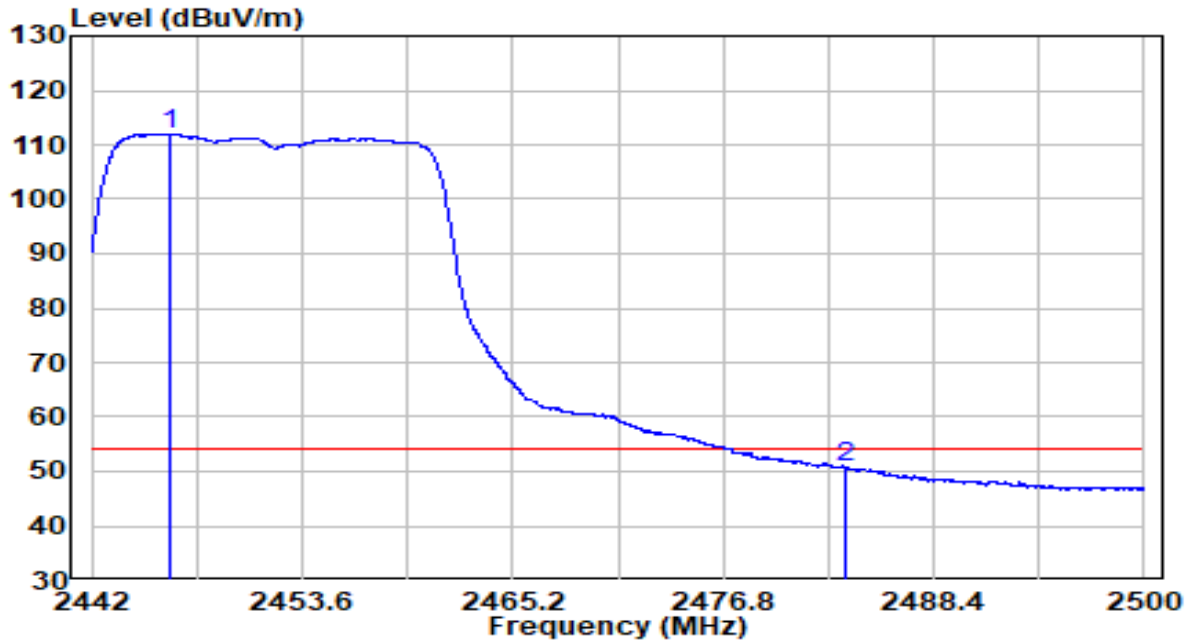


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2446.292	79.57	32.45	112.03	N/A	N/A	Average
2	2483.500	17.96	32.61	50.57	-3.43	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2452MHz	Test Voltage	By PoE

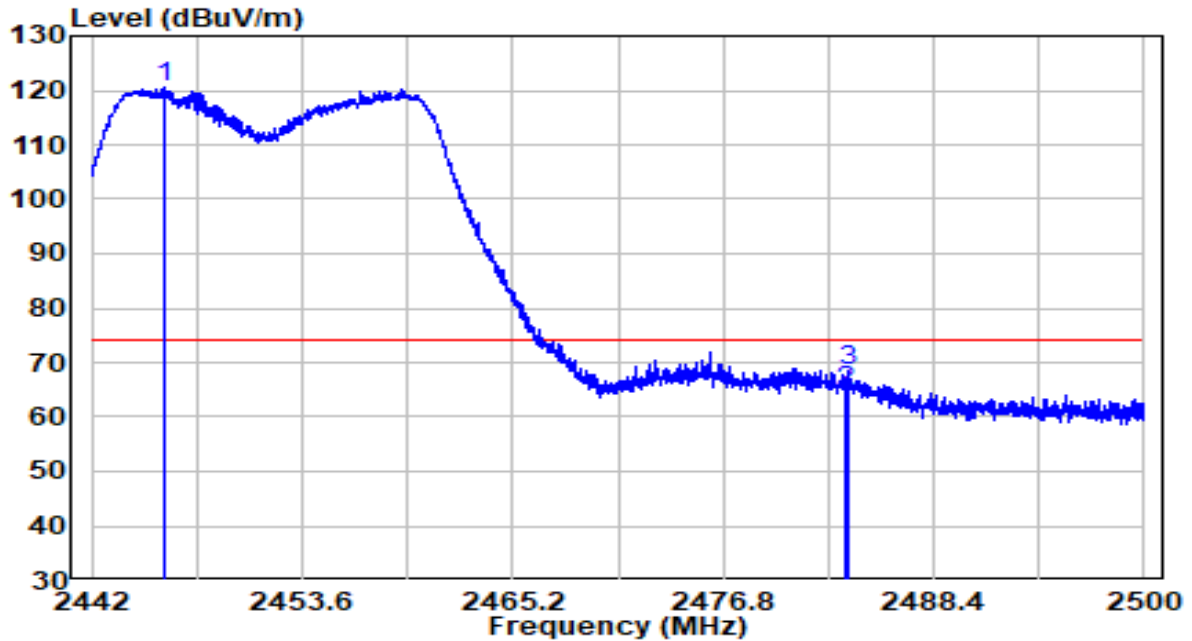


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2446.060	88.00	32.45	120.46	N/A	N/A	Peak
2	2483.500	32.00	32.61	64.61	-9.39	74.00	Peak
3	2483.731	35.94	32.61	68.55	-5.45	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2452MHz	Test Voltage	By PoE

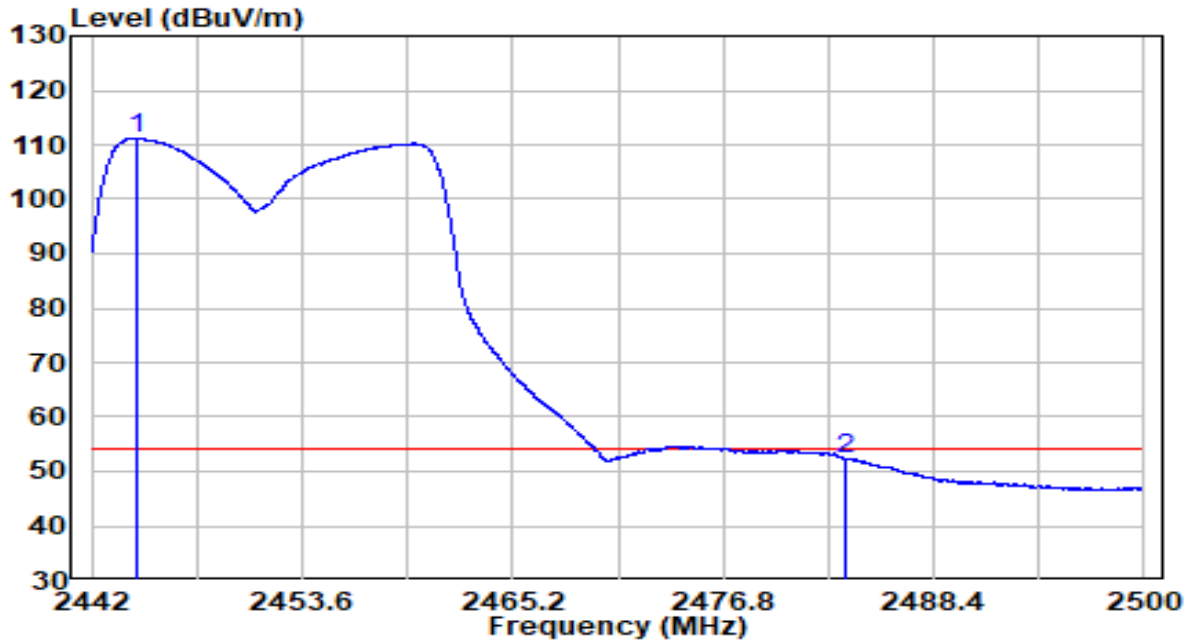


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2444.465	78.76	32.45	111.21	N/A	N/A	Average
2	2483.500	19.79	32.61	52.40	-1.60	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2457MHz	Test Voltage	By PoE

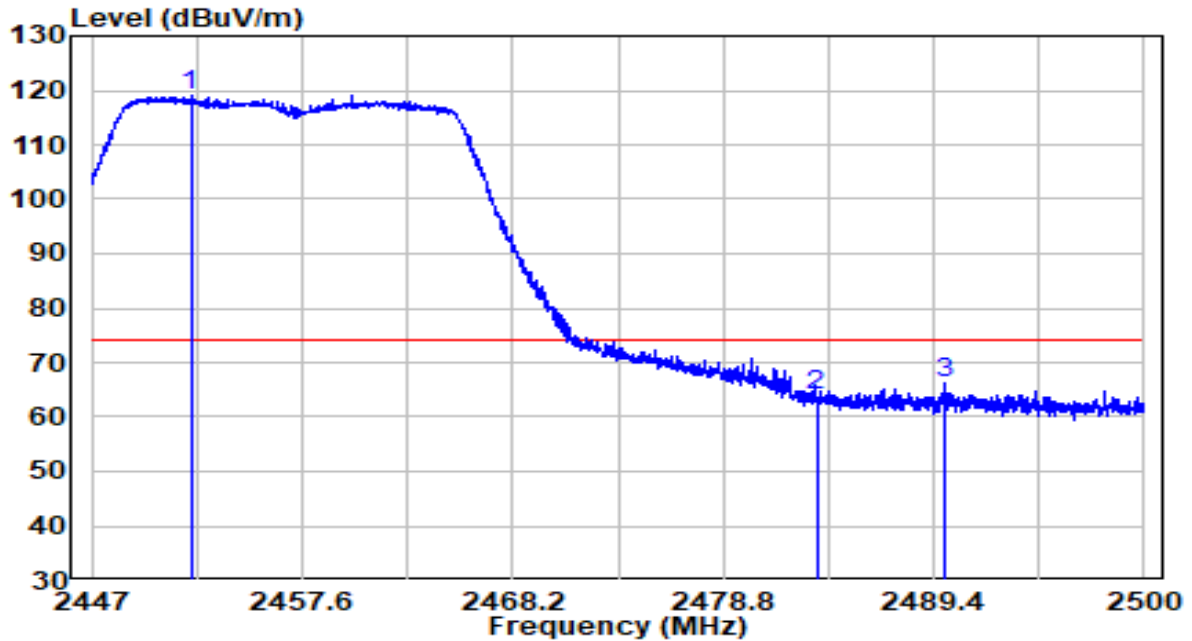


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2451.982	86.68	32.48	119.16	N/A	N/A	Peak
2	2483.500	31.31	32.61	63.92	-10.08	74.00	Peak
3	2489.904	33.58	32.64	66.22	-7.78	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2457MHz	Test Voltage	By PoE

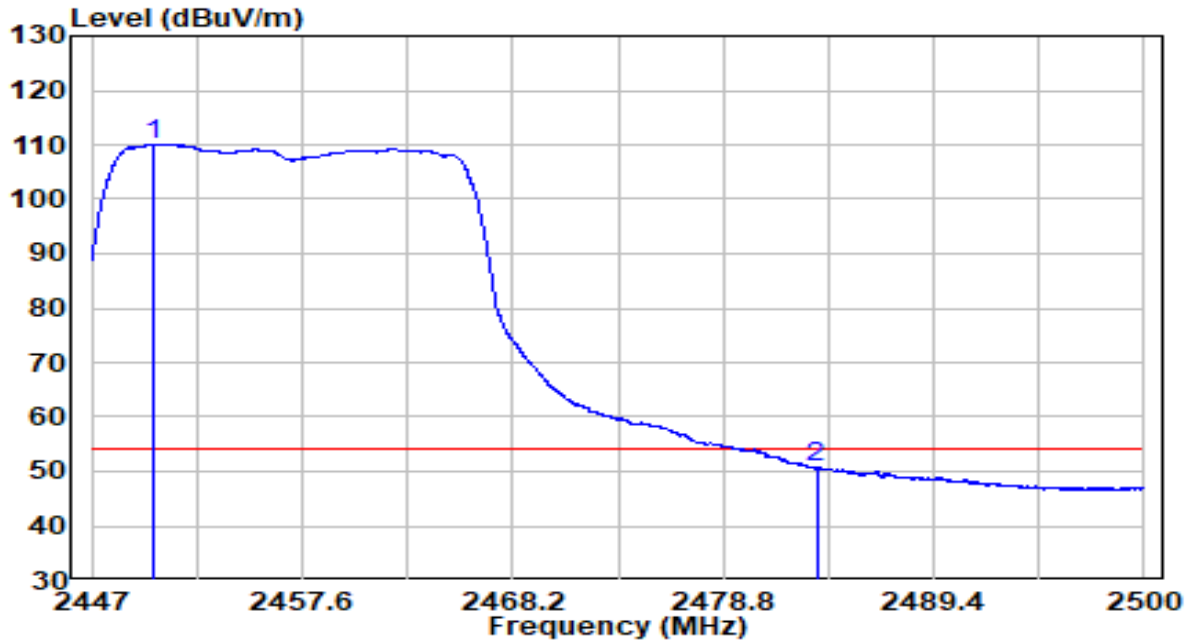


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2450.154	77.62	32.47	110.09	N/A	N/A	Average
2	2483.500	18.01	32.61	50.62	-3.38	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2457MHz	Test Voltage	By PoE

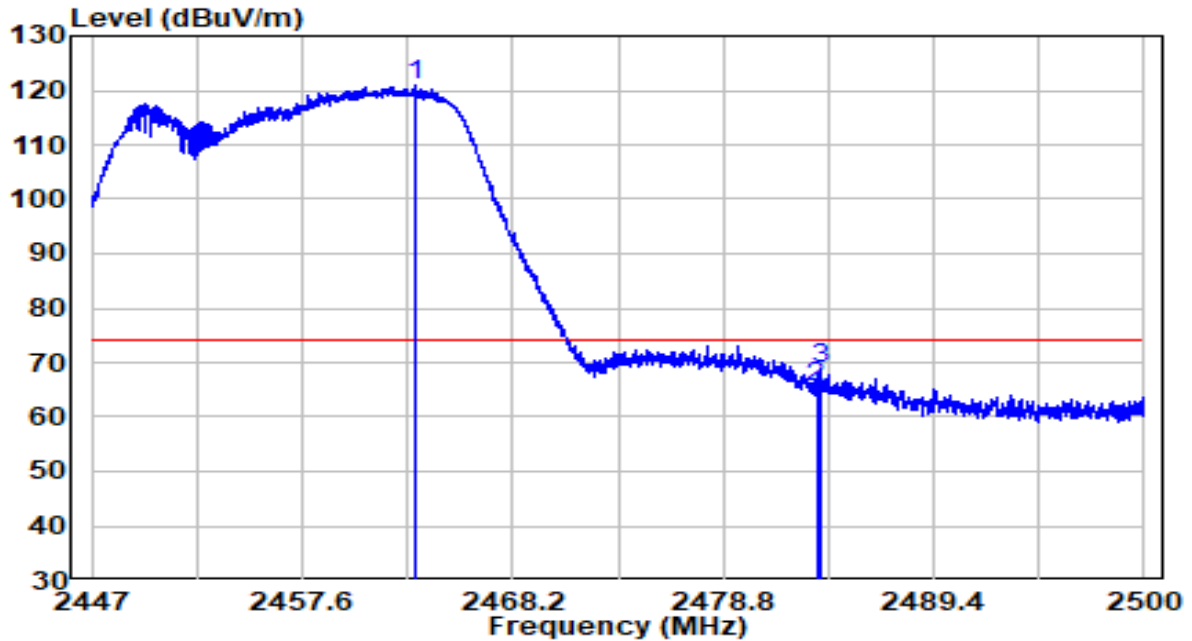


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2463.351	88.38	32.53	120.90	N/A	N/A	Peak
2		2483.500	32.70	32.61	65.31	-8.69	74.00	Peak
3		2483.756	36.07	32.61	68.69	-5.31	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2457MHz	Test Voltage	By PoE

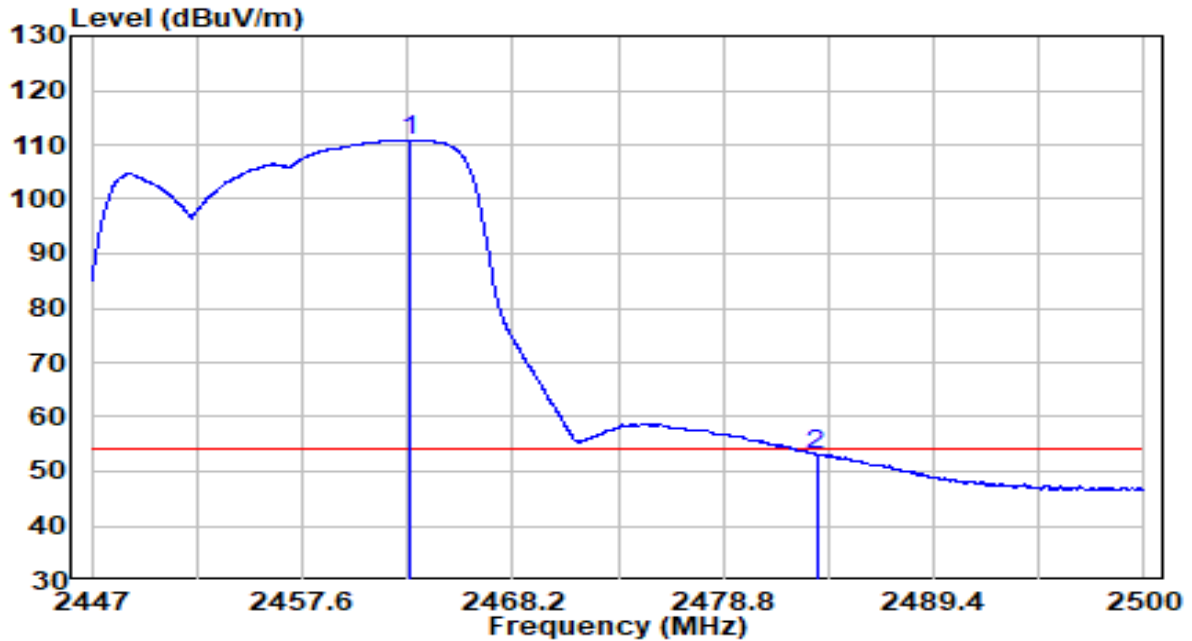


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	78.41	32.52	110.93	N/A	N/A	Average
2		20.52	32.61	53.13	-0.87	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2462MHz	Test Voltage	By PoE

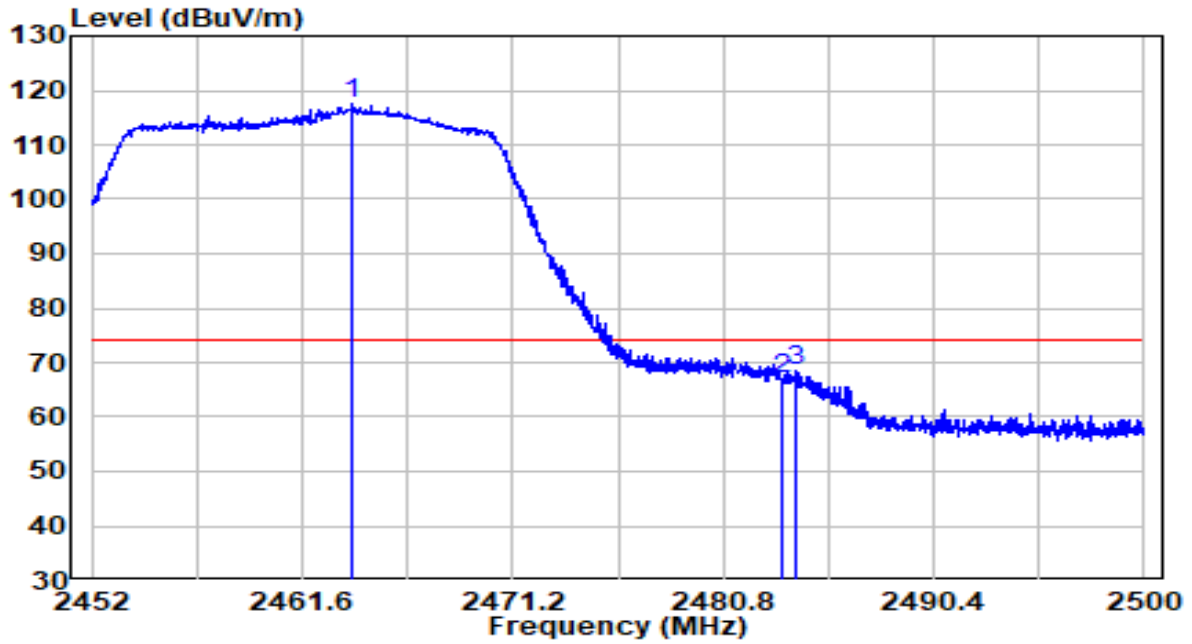


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	85.07	32.53	117.60	N/A	N/A	Peak
2		34.20	32.61	66.81	-7.19	74.00	Peak
3		35.90	32.61	68.52	-5.48	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2462MHz	Test Voltage	By PoE

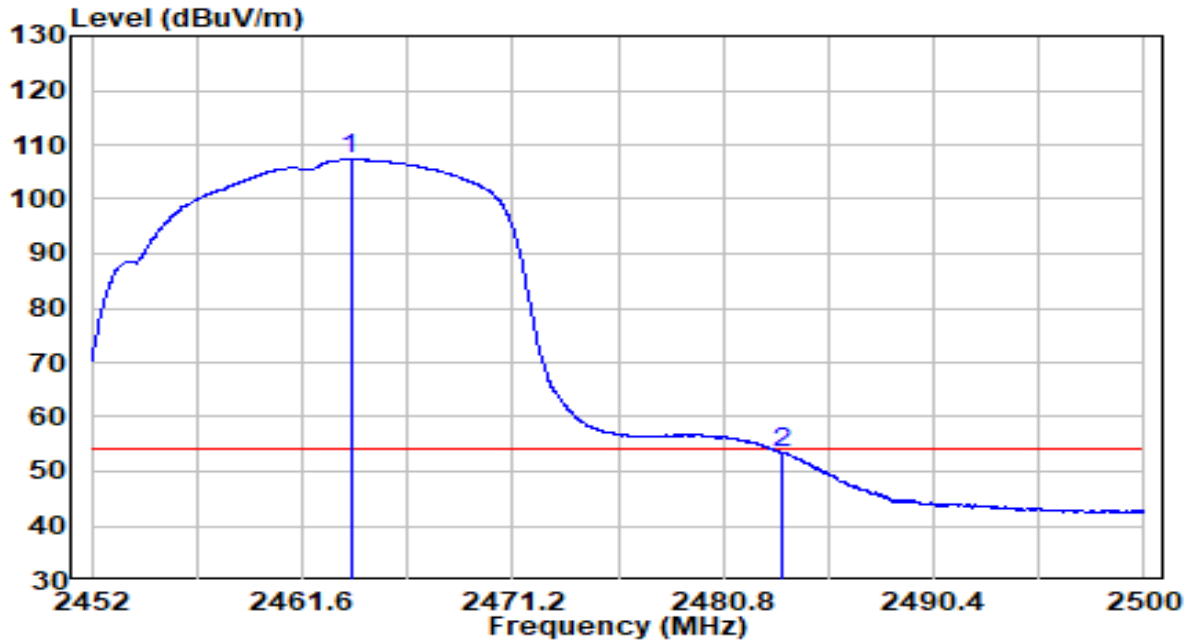


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	*	74.88	32.53	107.40	N/A	N/A	Average
2		20.87	32.61	53.48	-0.52	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2462MHz	Test Voltage	By PoE

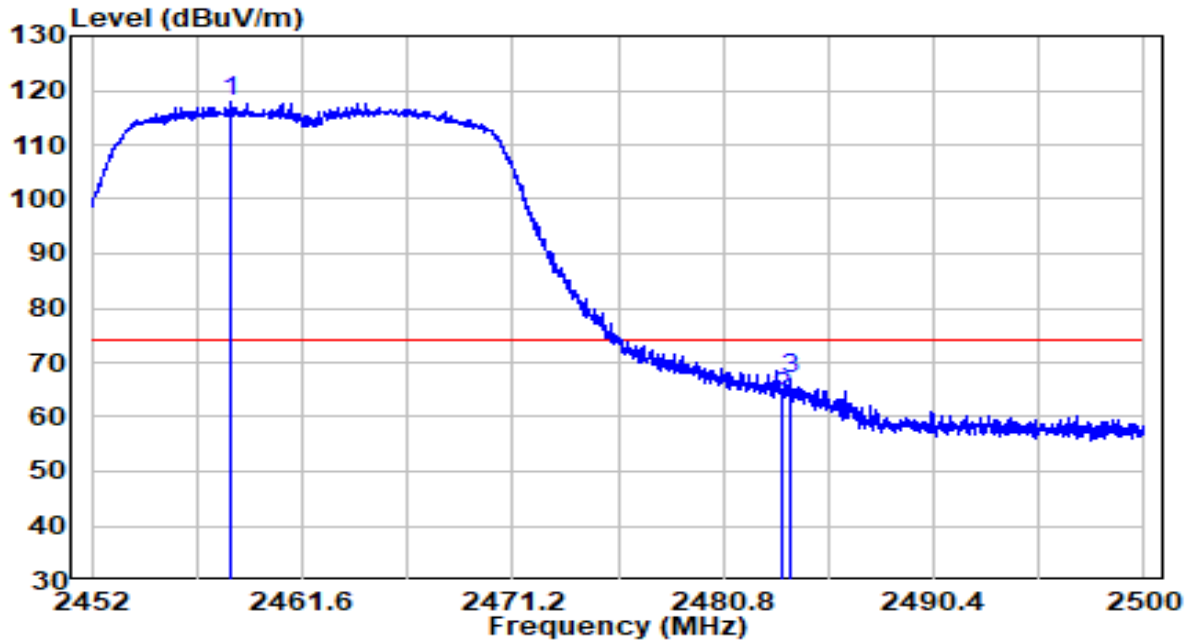


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	85.26	32.51	117.77	N/A	N/A	Peak
2		31.16	32.61	63.77	-10.23	74.00	Peak
3		34.27	32.61	66.89	-7.11	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2462MHz	Test Voltage	By PoE

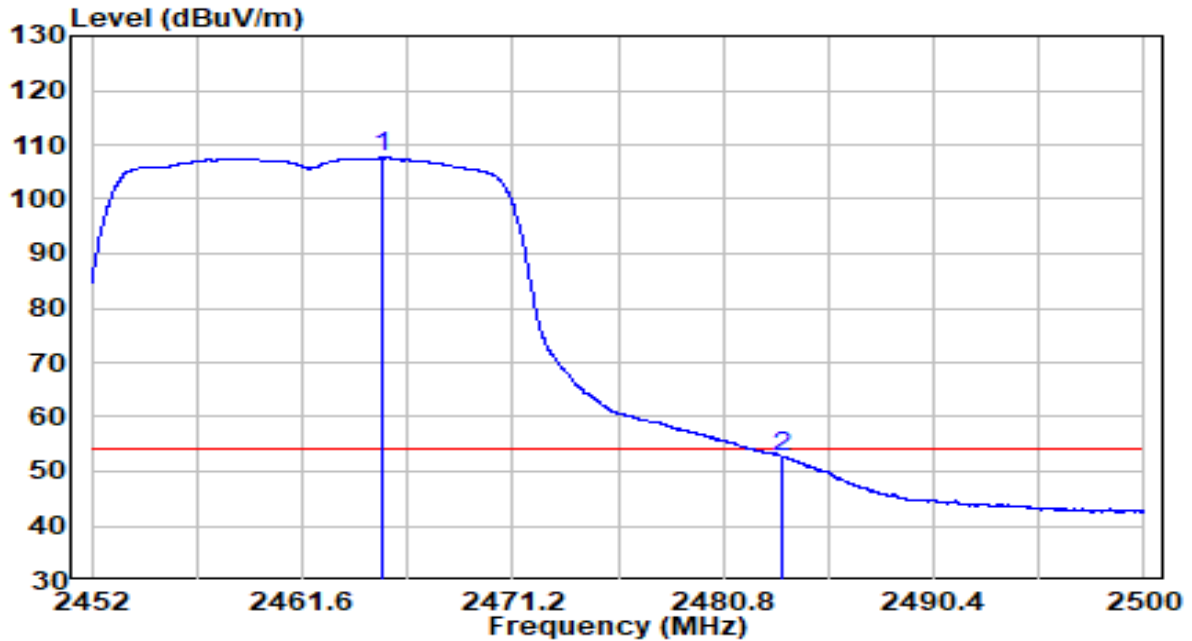


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	75.05	32.53	107.58	N/A	N/A	Average
2		19.98	32.61	52.59	-1.41	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2422MHz	Test Voltage	By PoE

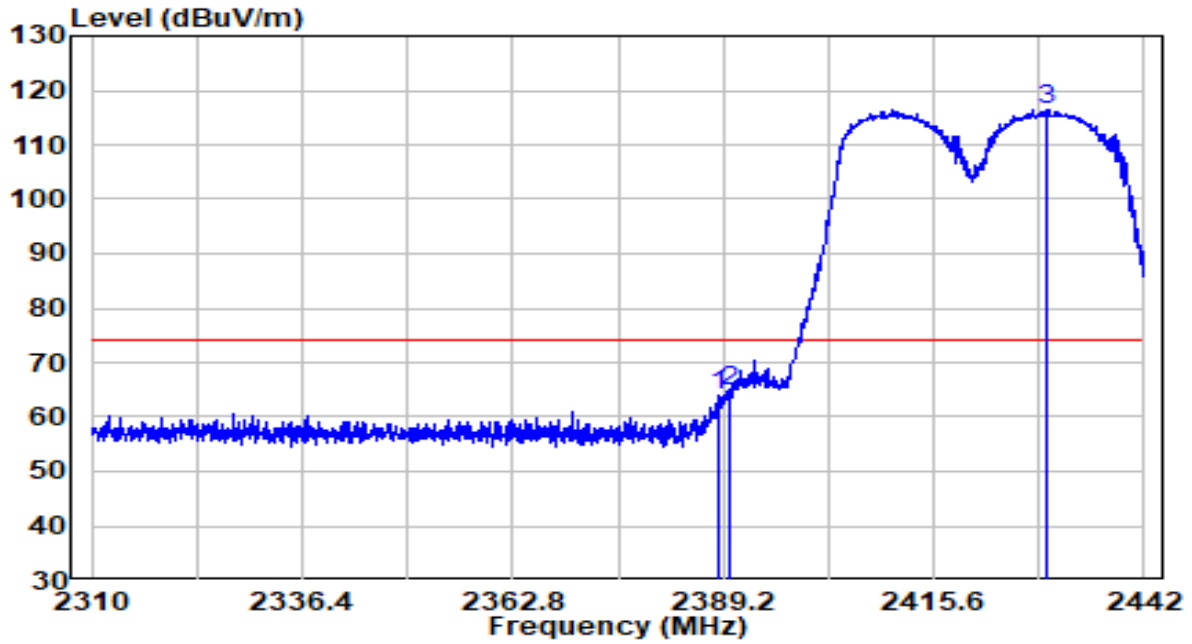


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2388.474	31.83	32.21	64.04	-9.96	74.00	Peak
2	2390.000	32.60	32.22	64.82	-9.18	74.00	Peak
3	* 2429.658	84.16	32.38	116.54	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2422MHz	Test Voltage	By PoE

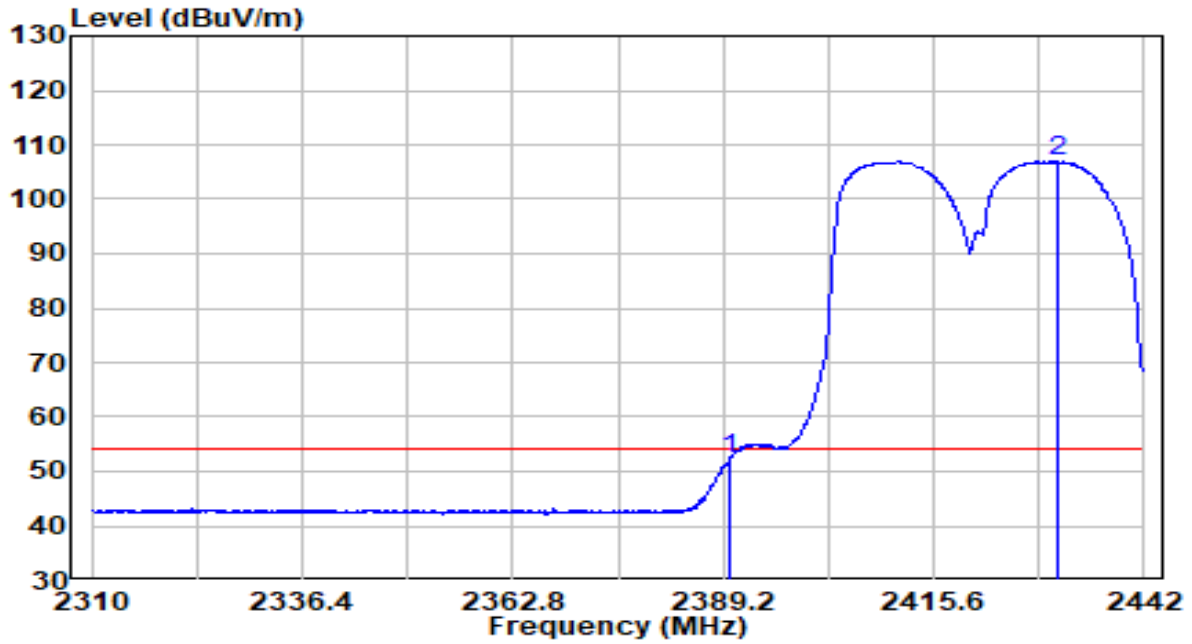


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	20.13	32.22	52.35	-1.65	54.00	Average
2	* 2431.308	74.48	32.39	106.87	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2422MHz	Test Voltage	By PoE

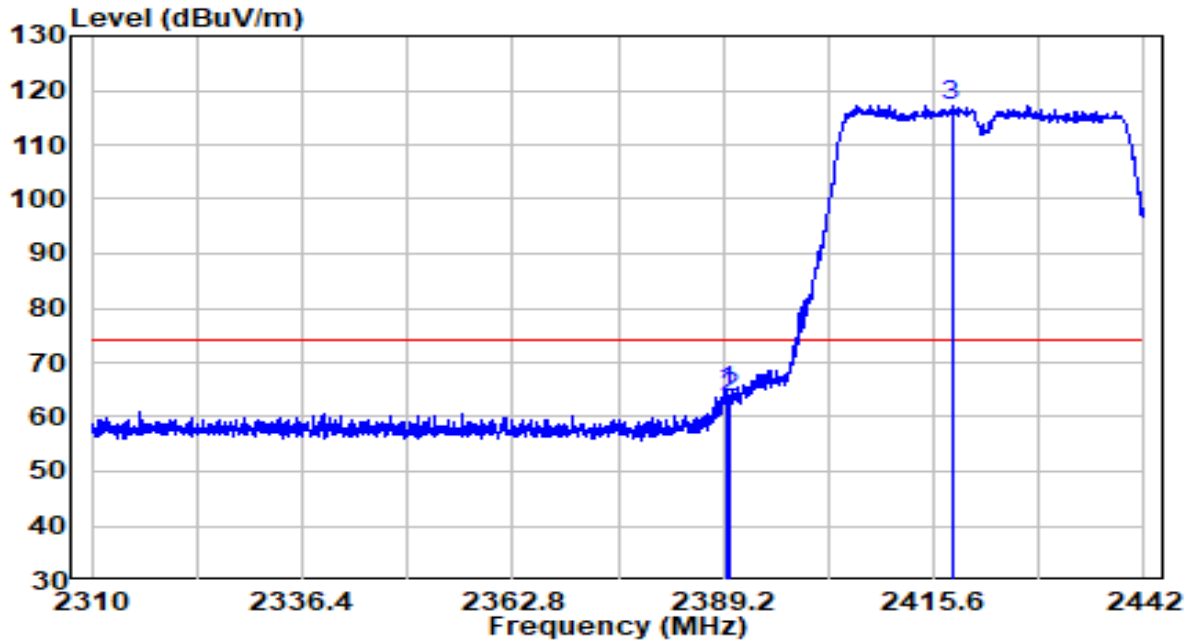


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2389.530	32.65	32.22	64.87	-9.13	74.00	Peak
2	2390.000	31.53	32.22	63.75	-10.25	74.00	Peak
3	* 2417.844	84.83	32.33	117.16	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2422MHz	Test Voltage	By PoE

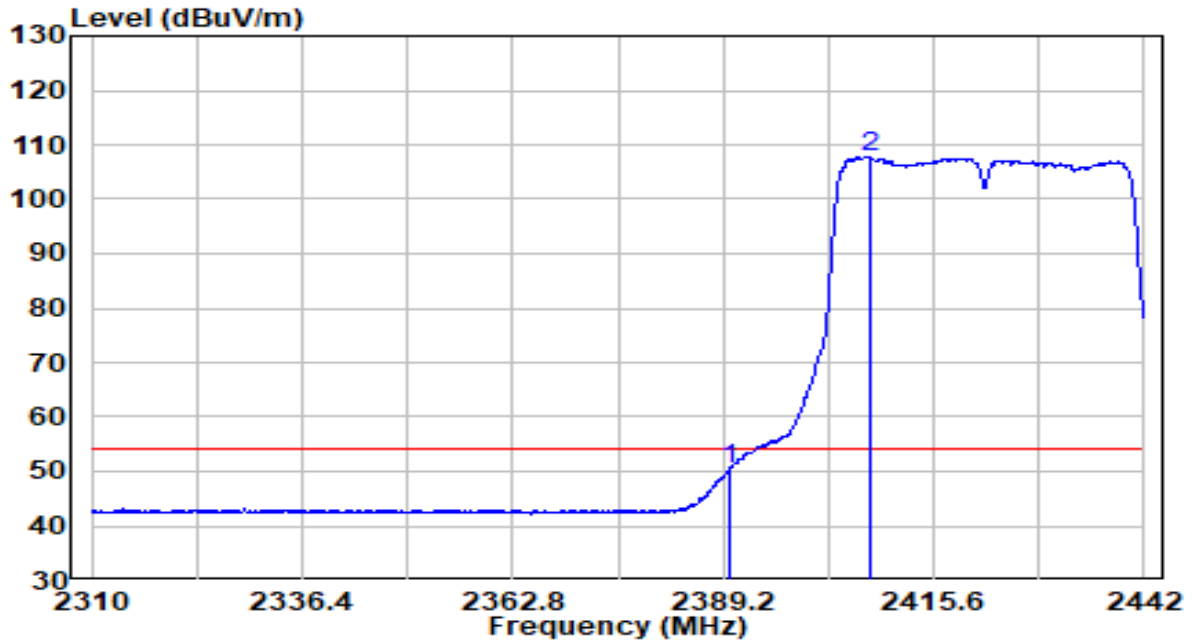


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	18.14	32.22	50.36	-3.64	54.00	Average
2	* 2407.548	75.46	32.29	107.76	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2452MHz	Test Voltage	By PoE

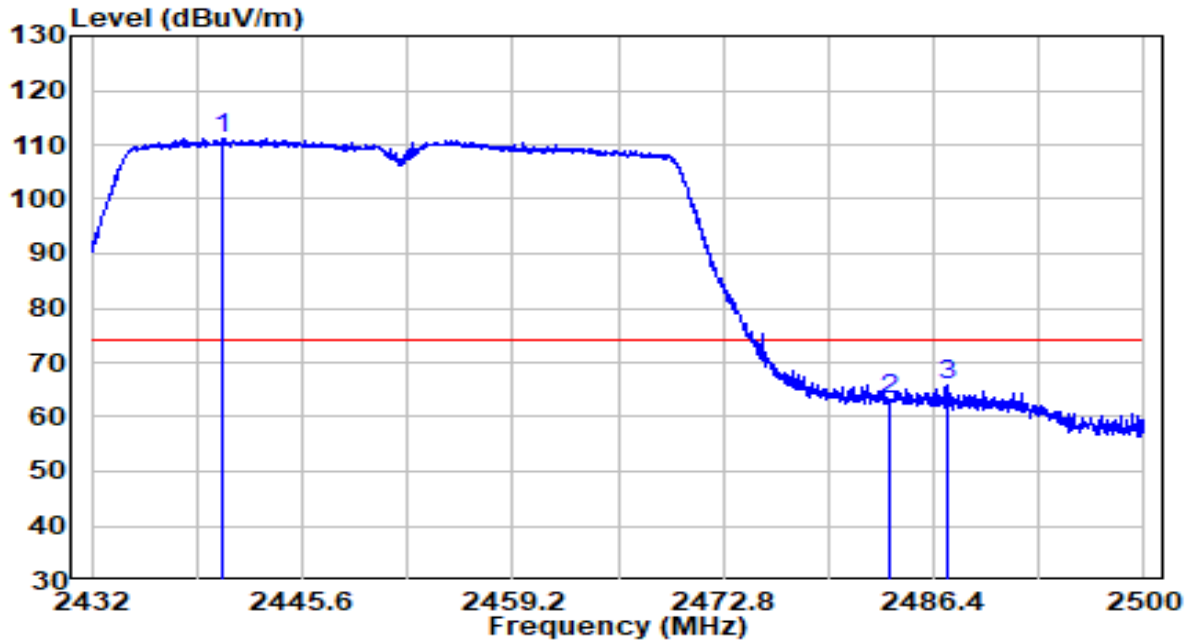


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2440.500	78.78	32.43	111.21	N/A	N/A	Peak
2	2483.500	30.69	32.61	63.30	-10.70	74.00	Peak
3	2487.318	33.13	32.63	65.76	-8.24	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2452MHz	Test Voltage	By PoE

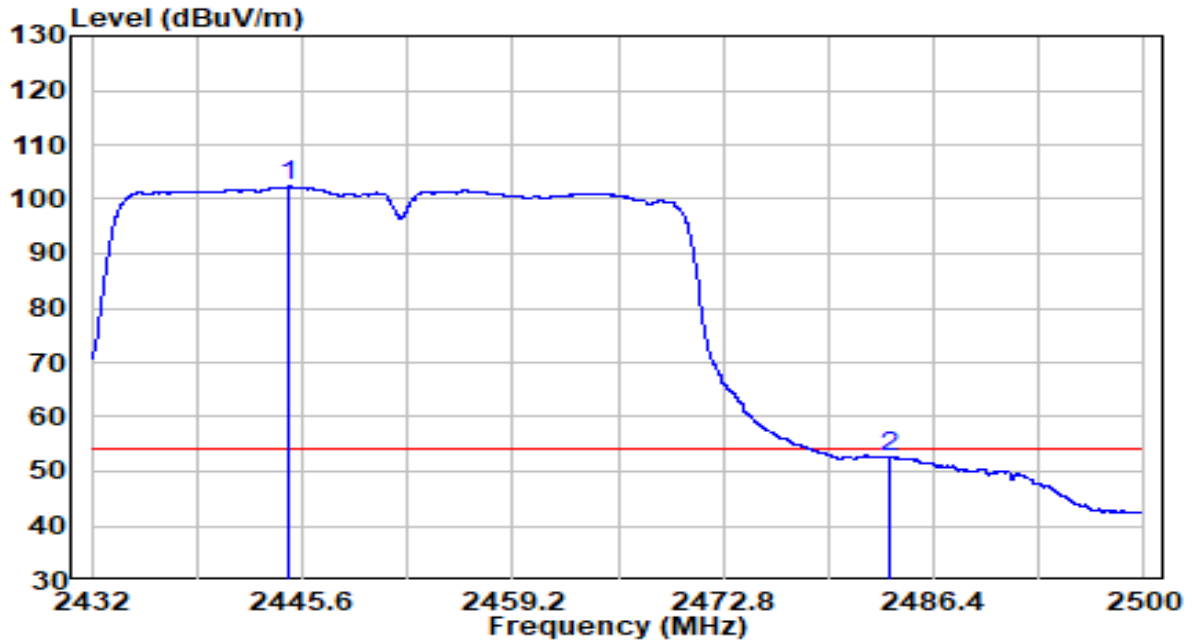


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2444.750	69.83	32.45	102.27	N/A	N/A	Average
2	2483.500	19.96	32.61	52.57	-1.43	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2452MHz	Test Voltage	By PoE

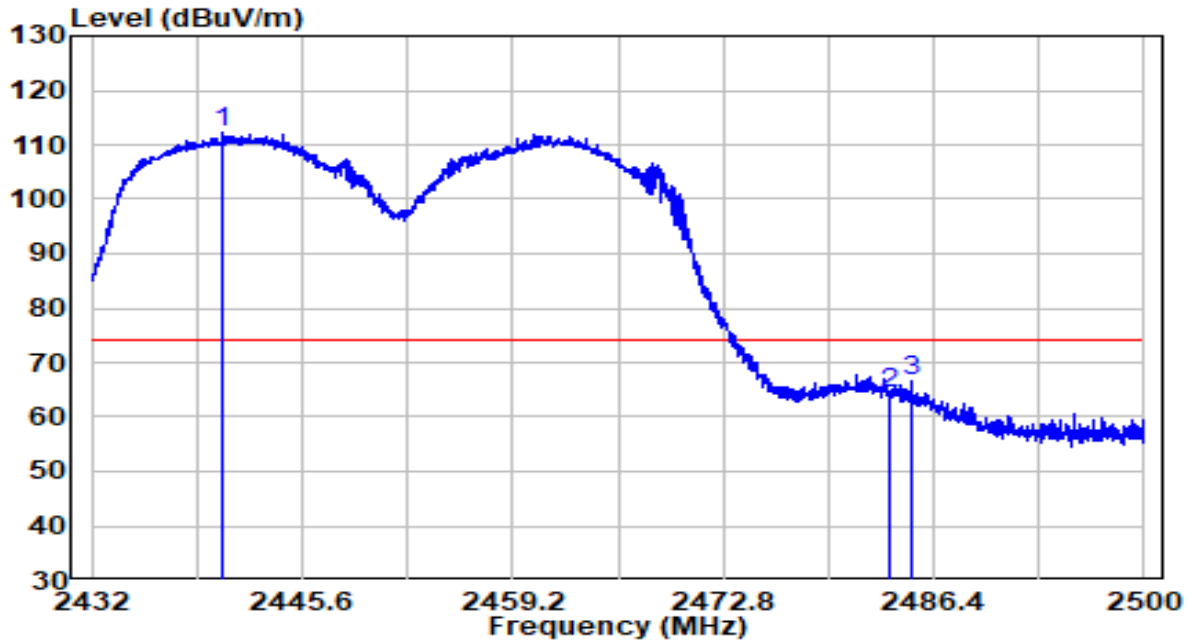


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	*	79.84	32.43	112.27	N/A	N/A	Peak
2		31.68	32.61	64.29	-9.71	74.00	Peak
3		33.83	32.62	66.45	-7.55	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2452MHz	Test Voltage	By PoE

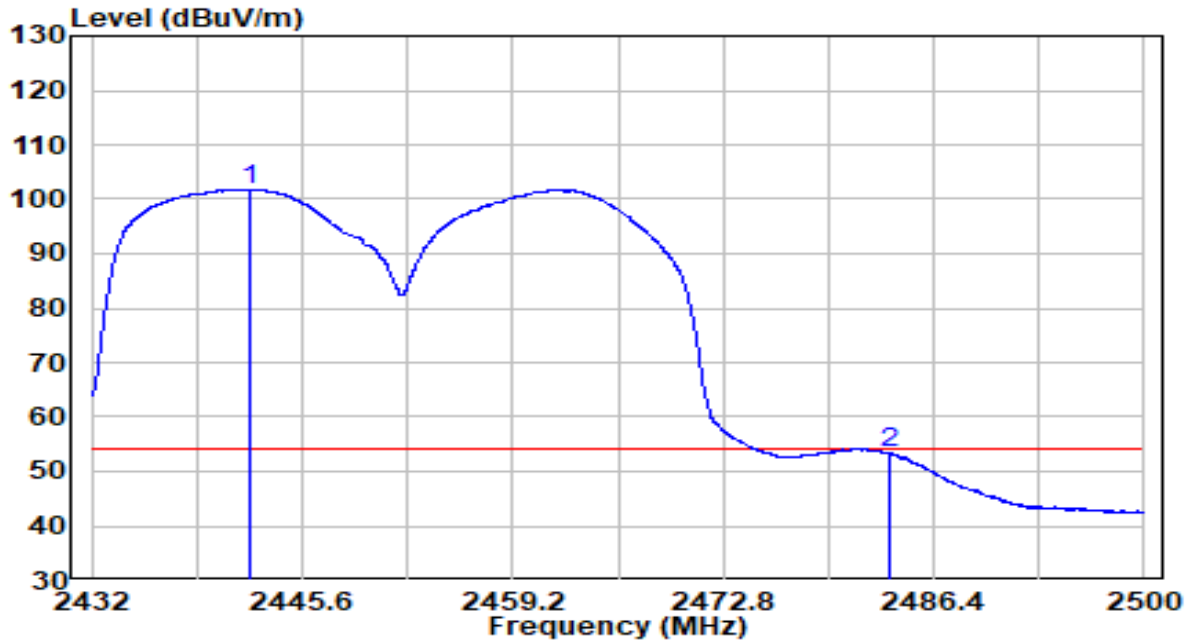


No	Frequency (MHz)	Reading (dBµV)	C.F (dB)	Measurement (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Remark (QP/PK/AV)
1	* 2442.234	69.39	32.44	101.83	N/A	N/A	Average
2	2483.500	20.78	32.61	53.39	-0.61	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBµV/m) = Reading(dBµV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz	Test Voltage	By PoE

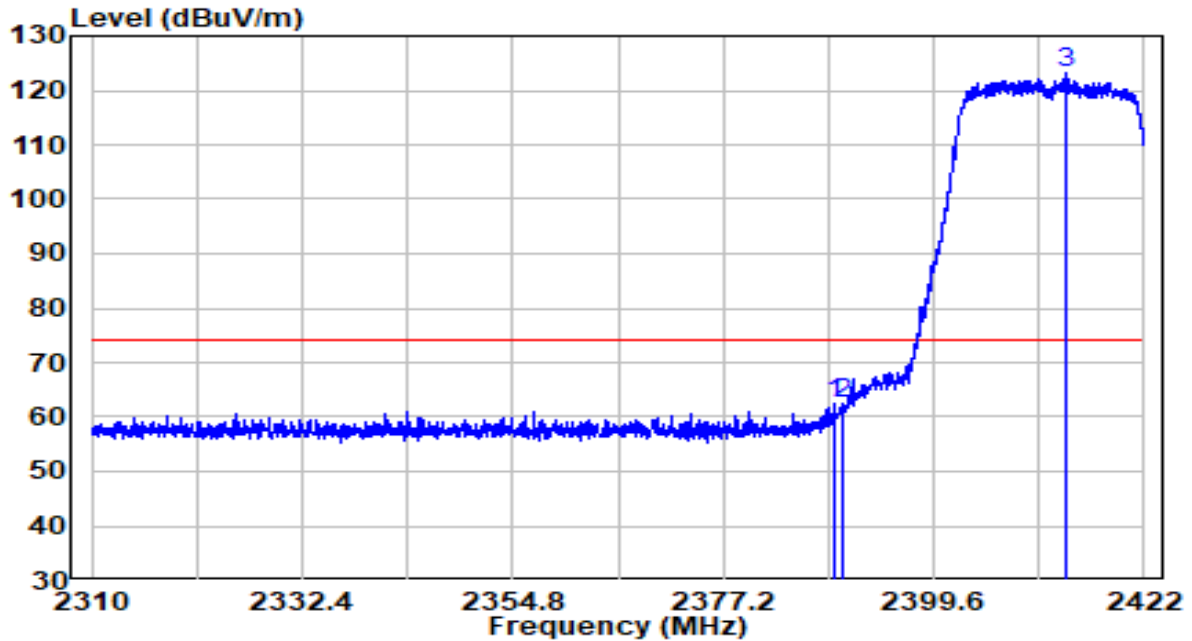


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.072	30.15	32.21	62.36	-11.64	74.00	Peak
2	2390.000	30.06	32.22	62.28	-11.72	74.00	Peak
3	* 2413.544	90.84	32.32	123.16	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz	Test Voltage	By PoE

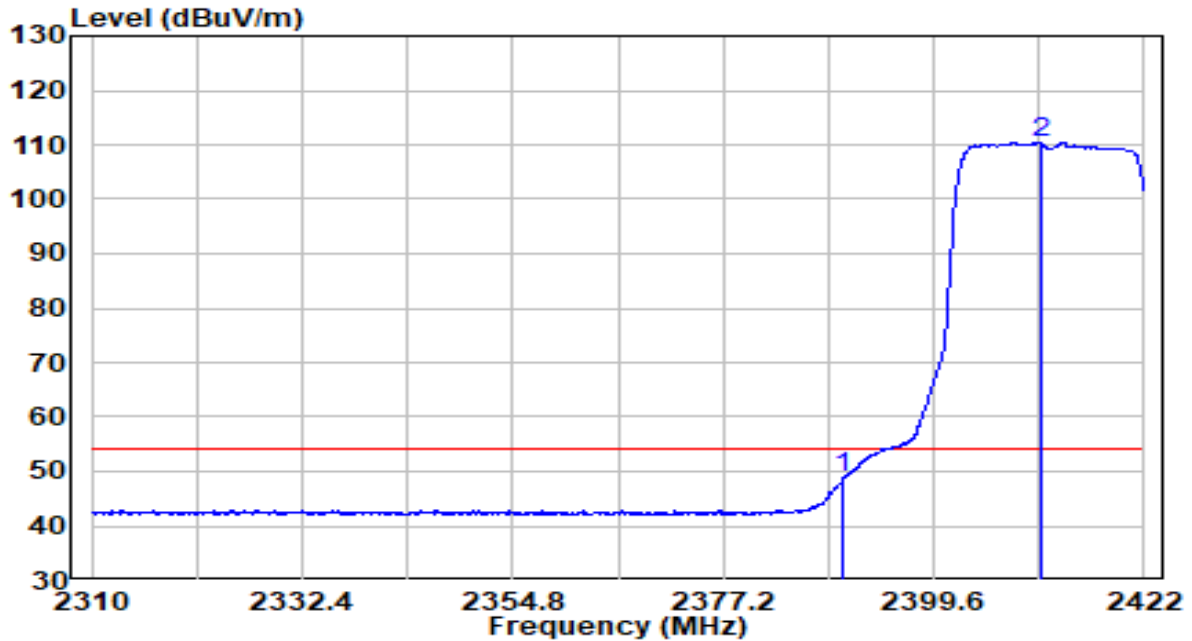


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	16.61	32.22	48.83	-5.17	54.00	Average
2	* 2410.912	77.99	32.31	110.30	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz	Test Voltage	By PoE

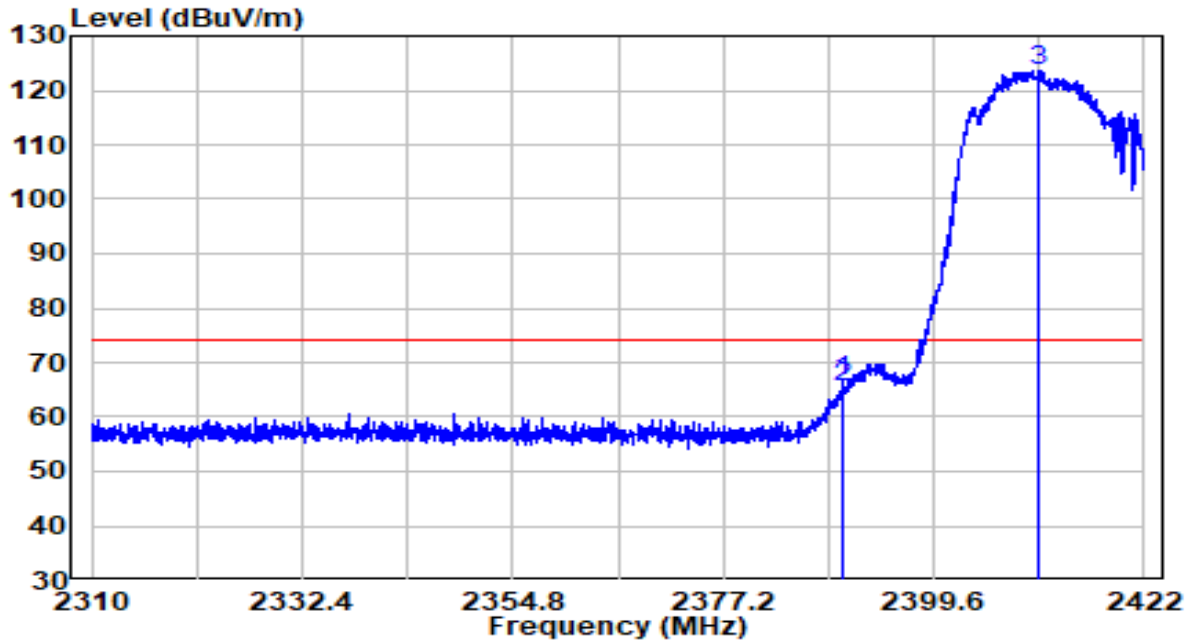


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.912	34.54	32.22	66.75	-7.25	74.00	Peak
2	2390.000	33.42	32.22	65.64	-8.36	74.00	Peak
3	* 2410.800	91.20	32.31	123.50	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz	Test Voltage	By PoE

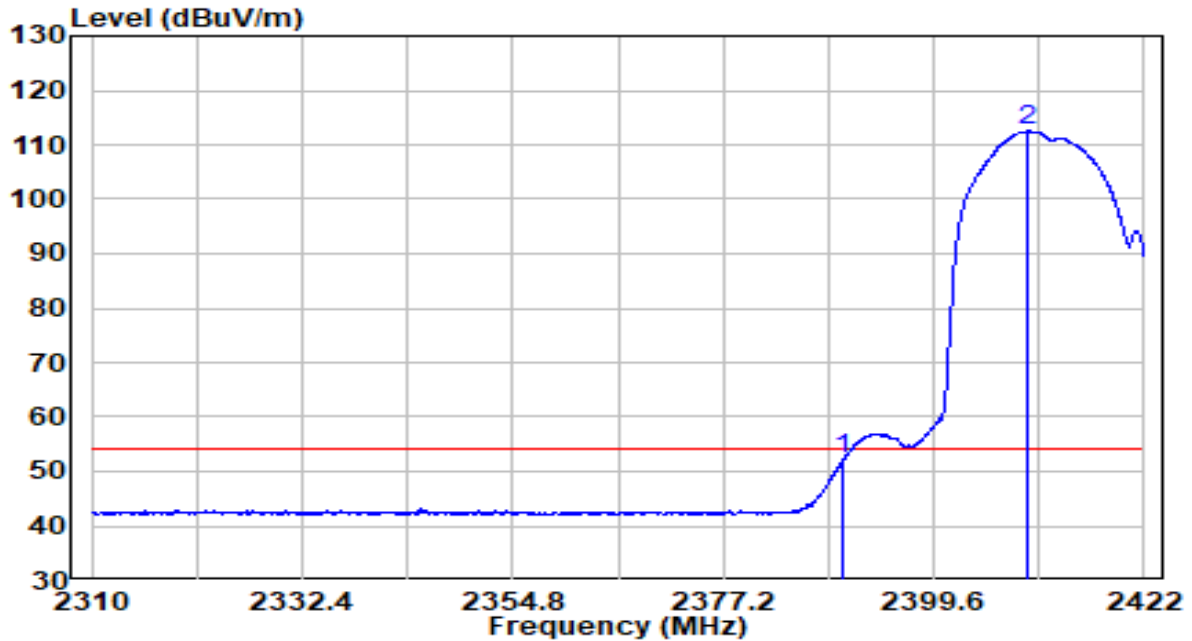


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	19.94	32.22	52.16	-1.84	54.00	Average
2	* 2409.680	80.17	32.30	112.47	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2452MHz	Test Voltage	By PoE

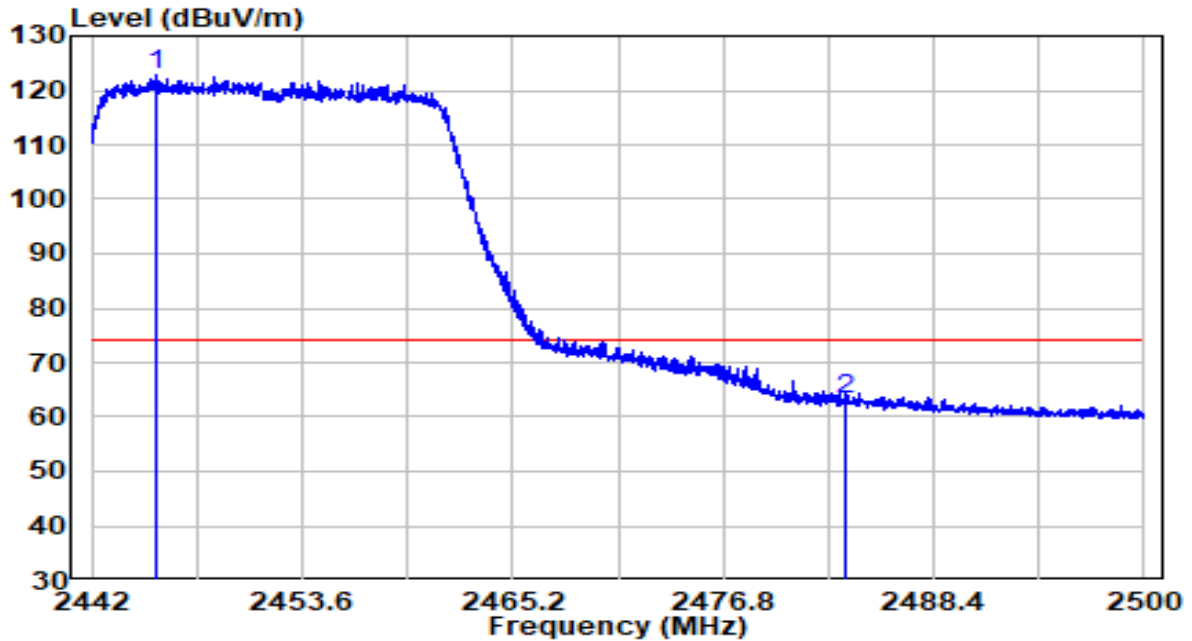


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2445.596	90.43	32.45	122.89	N/A	N/A	Peak
2	2483.500	30.73	32.61	63.34	-10.66	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2452MHz	Test Voltage	By PoE

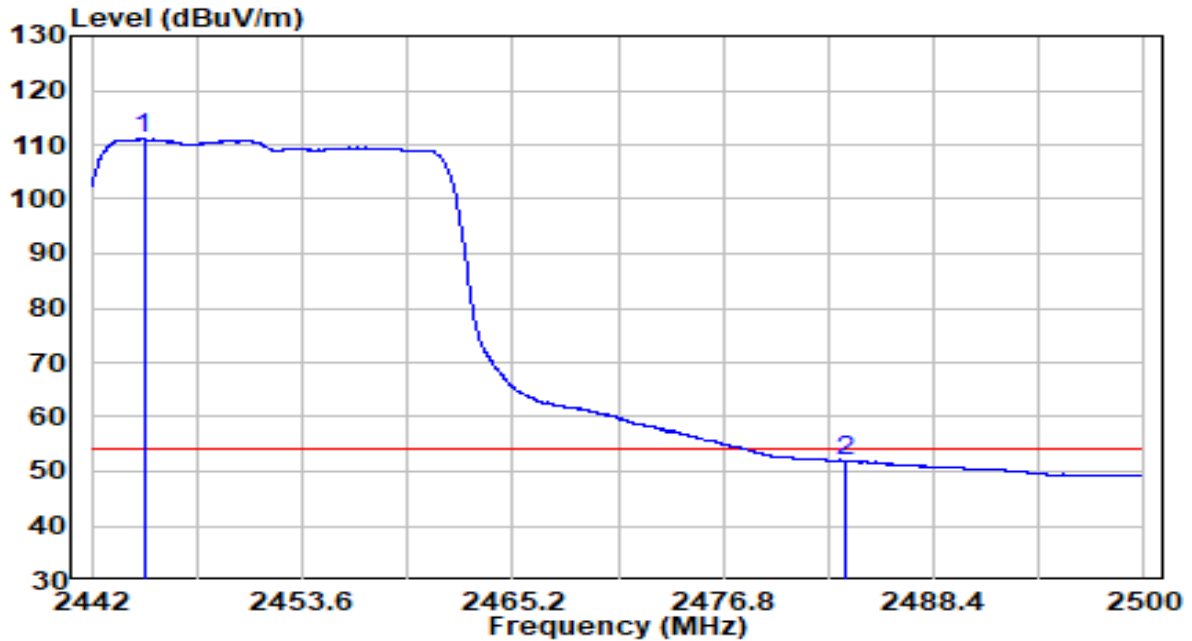


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2444.871	78.57	32.45	111.02	N/A	N/A	Average
2	2483.499	19.22	32.61	51.83	-2.17	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2452MHz	Test Voltage	By PoE

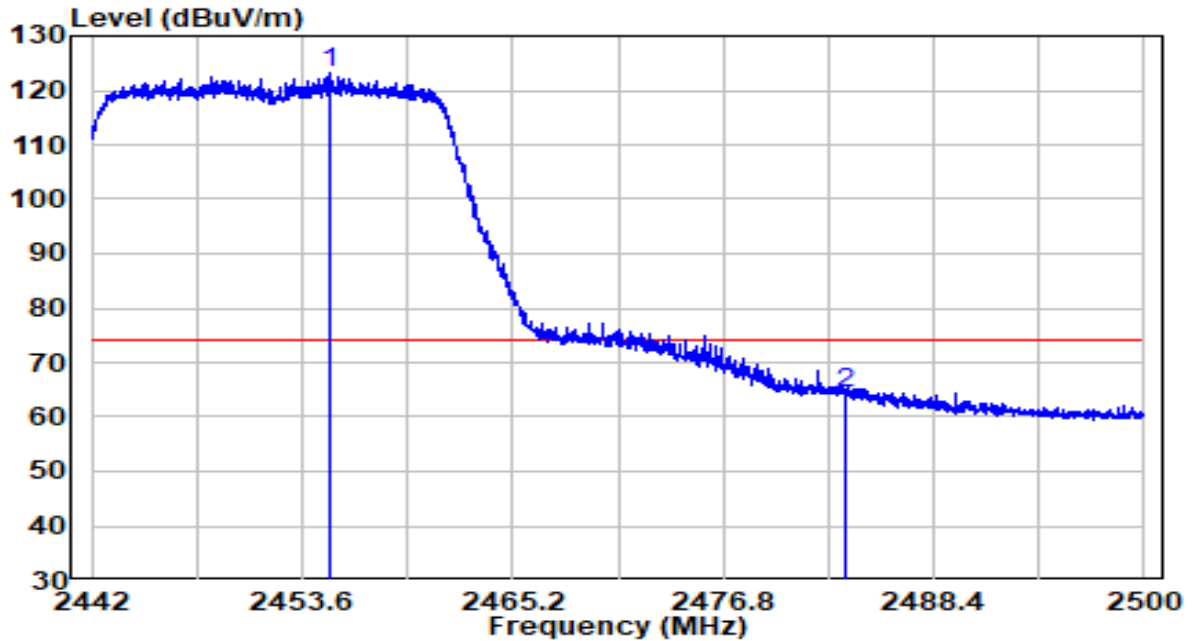


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2455.137	90.54	32.49	123.03	N/A	N/A	Peak
2	2483.500	31.85	32.61	64.46	-9.54	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2452MHz	Test Voltage	By PoE

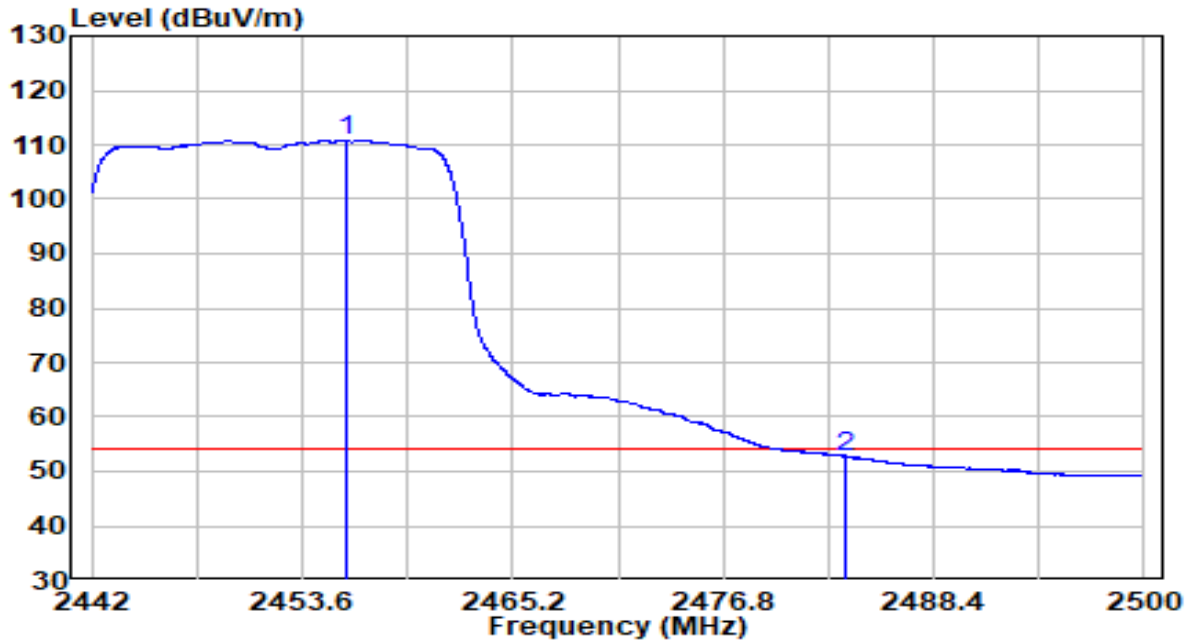


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2456.007	78.38	32.50	110.87	N/A	N/A	Average
2	* 2483.499	20.22	32.61	52.83	-1.17	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2457MHz	Test Voltage	By PoE

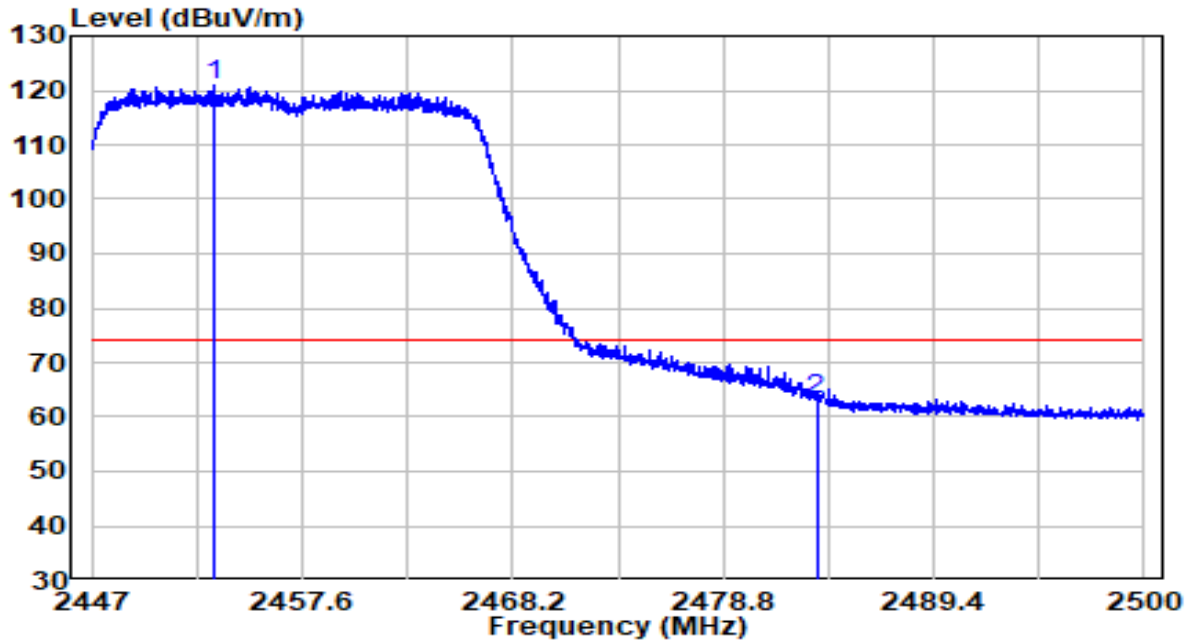


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2453.122	88.33	32.48	120.81	N/A	N/A	Peak
2	2483.500	30.63	32.61	63.24	-10.76	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2457MHz	Test Voltage	By PoE

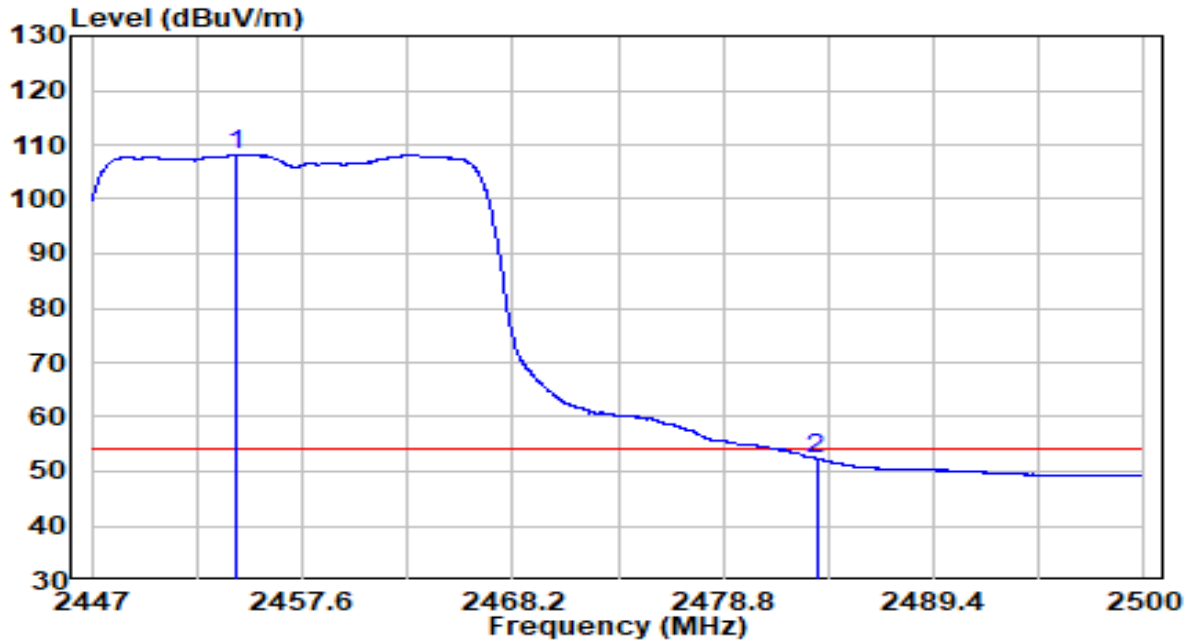


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	*	75.75	32.49	108.24	N/A	N/A	Average
2		19.75	32.61	52.36	-1.64	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2457MHz	Test Voltage	By PoE

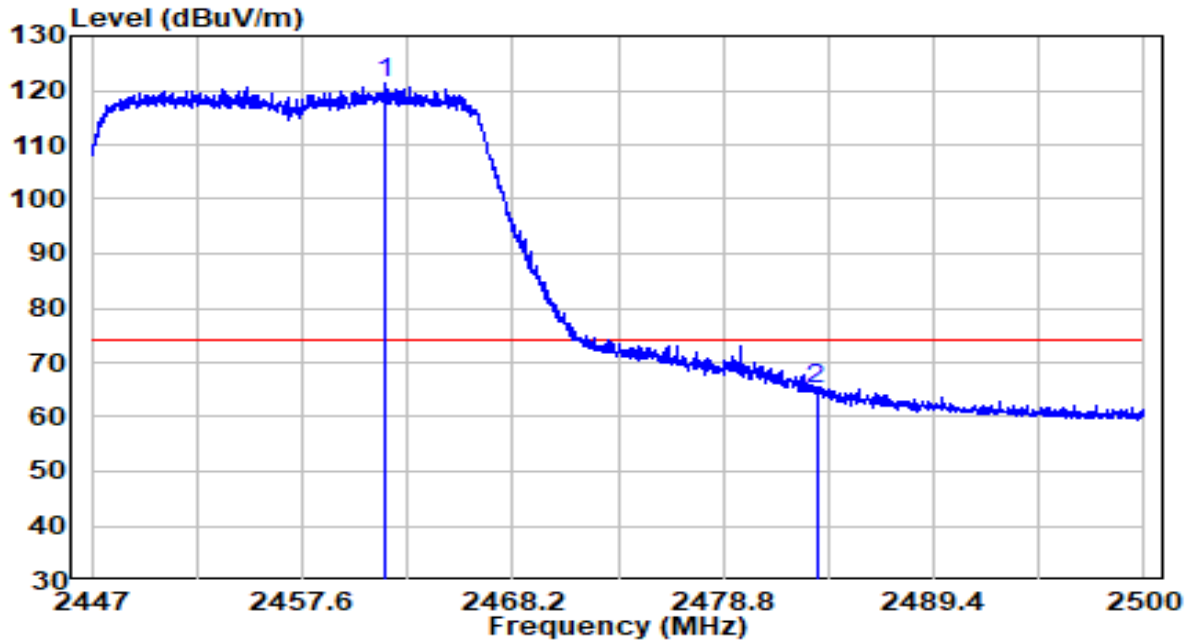


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2461.734	88.71	32.52	121.23	N/A	N/A	Peak
2	2483.500	32.57	32.61	65.18	-8.82	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2457MHz	Test Voltage	By PoE

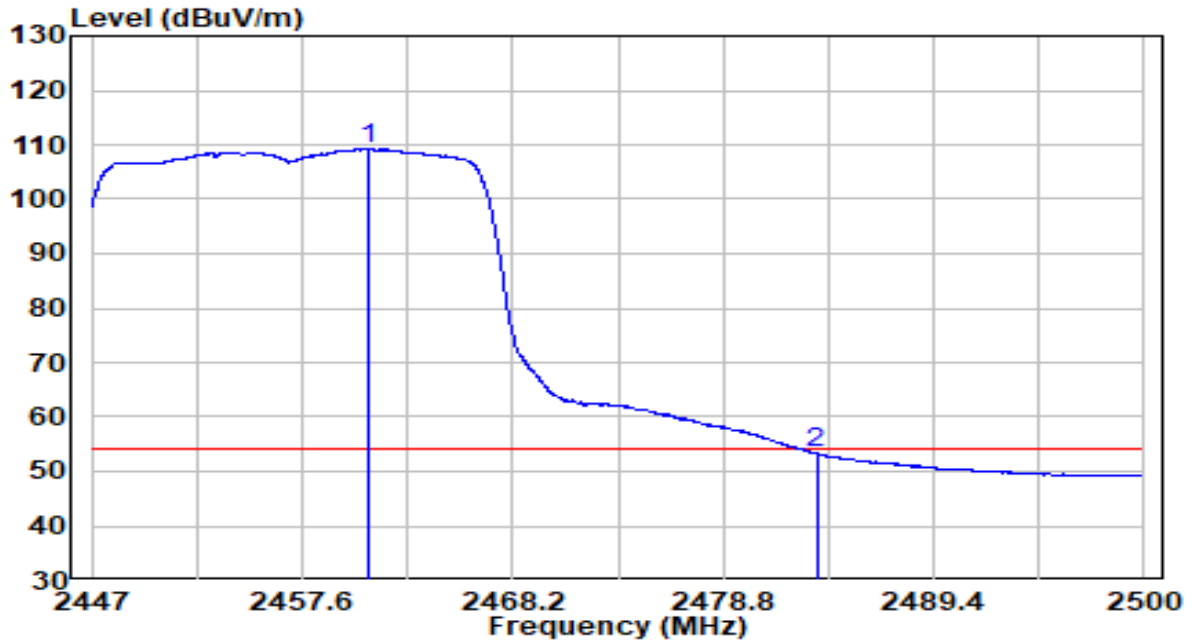


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	*	76.67	32.52	109.19	N/A	N/A	Average
2		20.70	32.61	53.31	-0.69	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz	Test Voltage	By PoE

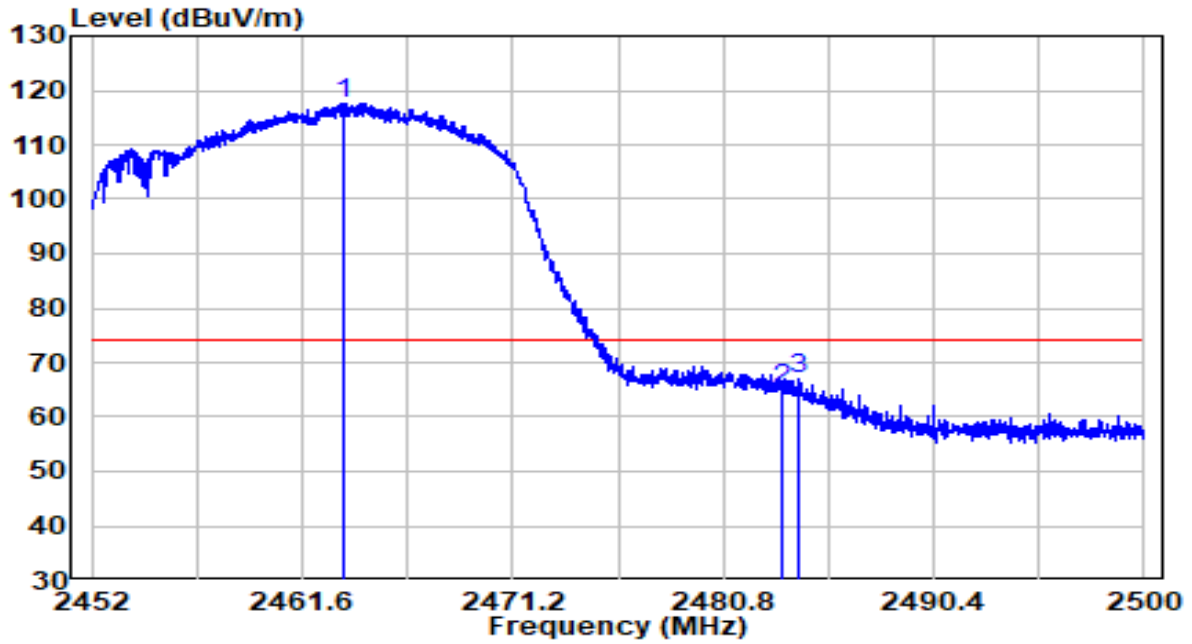


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2463.472	85.16	32.53	117.68	N/A	N/A	Peak
2	2483.500	32.48	32.61	65.09	-8.91	74.00	Peak
3	2484.184	34.56	32.61	67.17	-6.83	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz	Test Voltage	By PoE

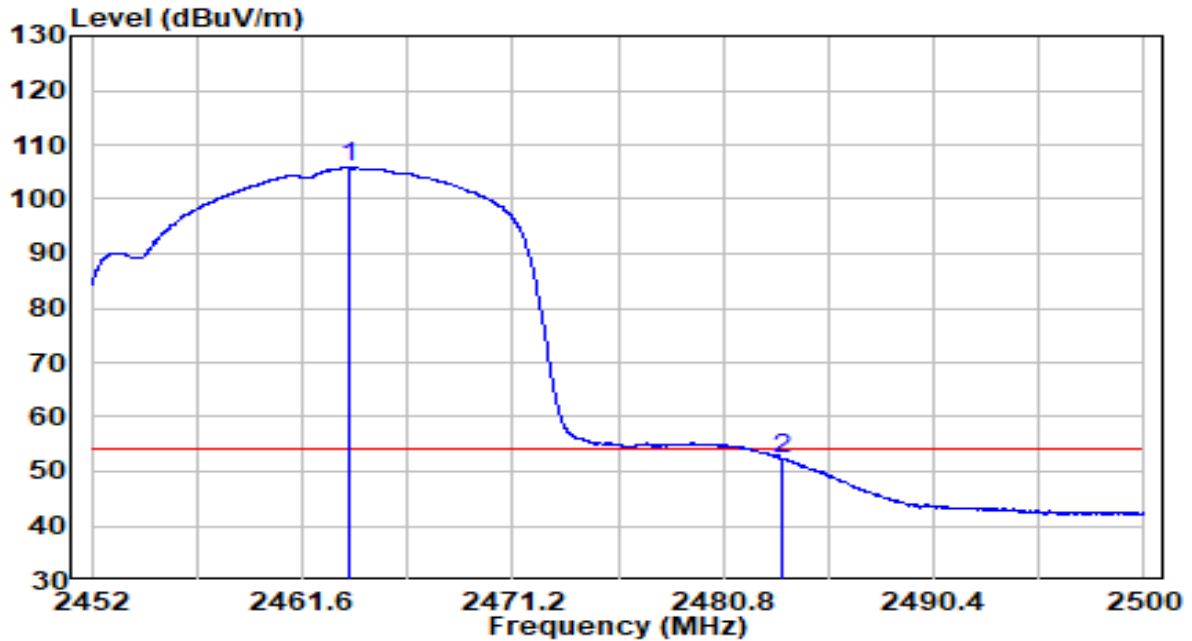


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	73.21	32.53	105.74	N/A	N/A	Average
2		19.78	32.61	52.39	-1.61	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz	Test Voltage	By PoE

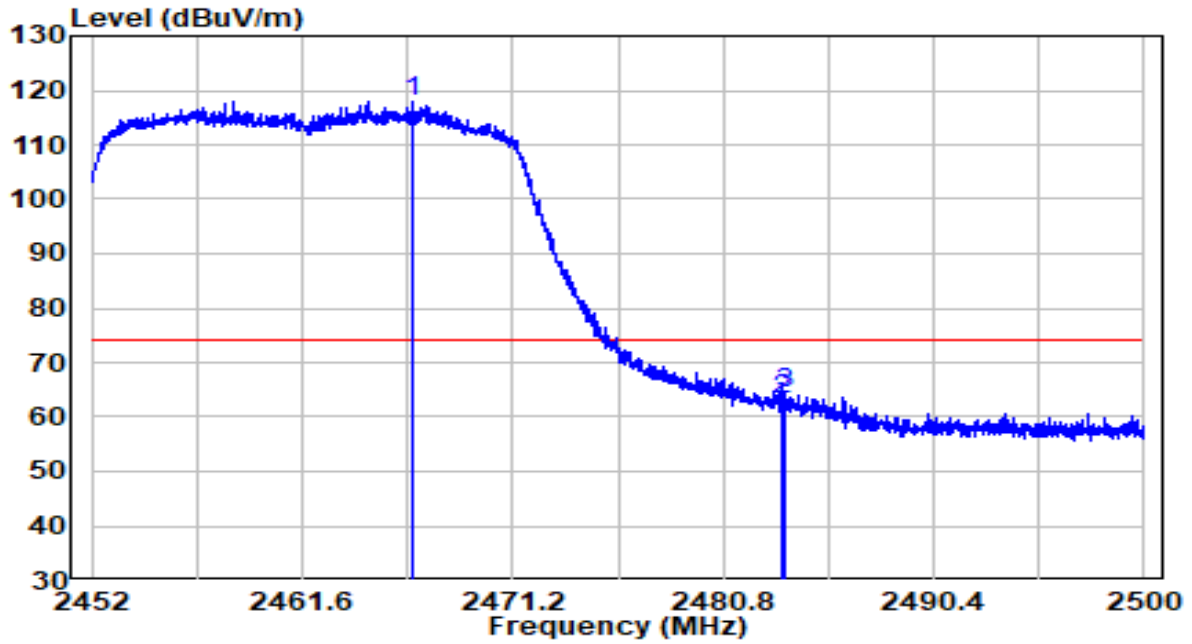


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	85.44	32.54	117.98	N/A	N/A	Peak
2		30.50	32.61	63.11	-10.89	74.00	Peak
3		31.84	32.61	64.45	-9.55	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz	Test Voltage	By PoE

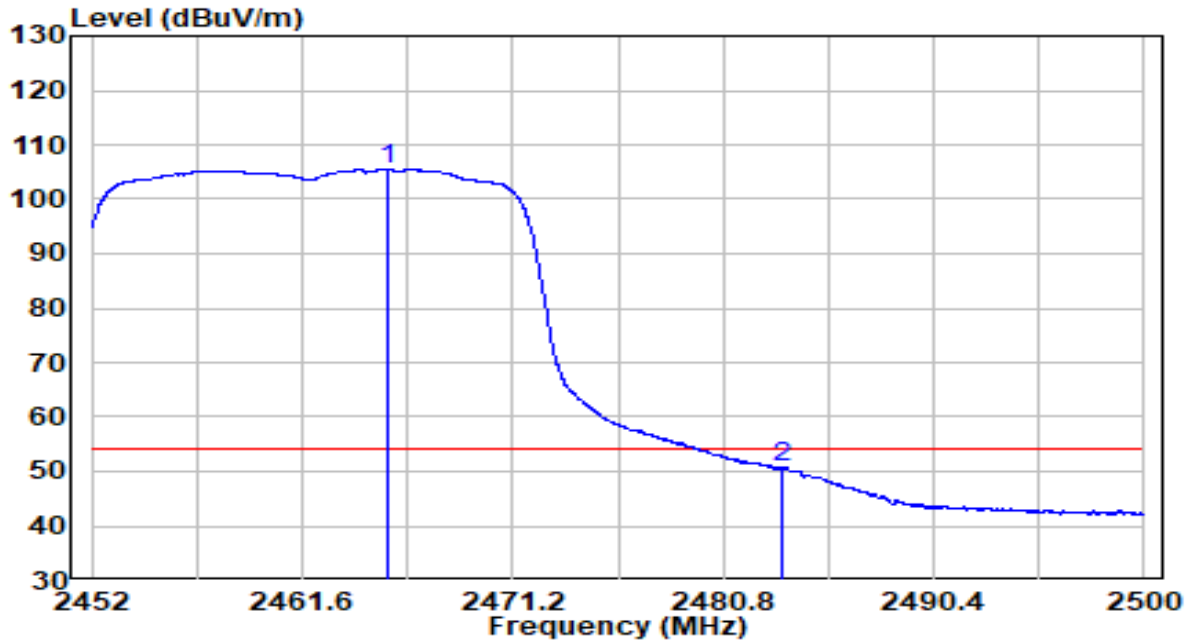


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	72.98	32.54	105.51	N/A	N/A	Average
2		18.00	32.61	50.61	-3.39	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	By PoE

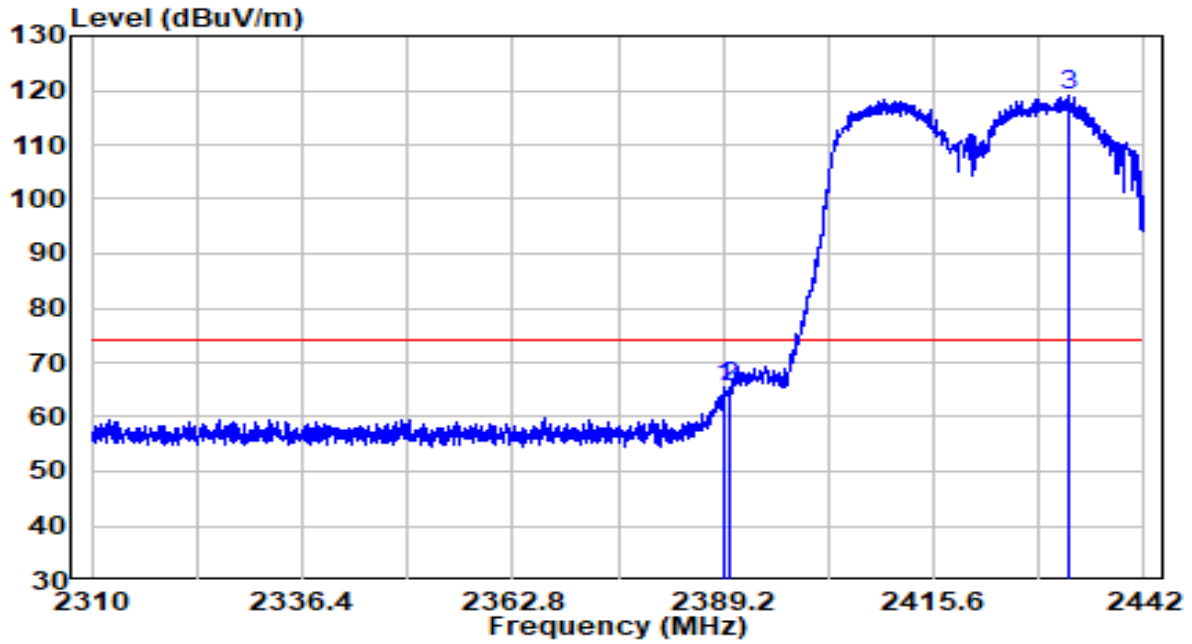


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.266	33.40	32.21	65.61	-8.39	74.00	Peak
2	2390.000	33.44	32.22	65.66	-8.34	74.00	Peak
3	* 2432.430	86.59	32.40	118.99	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	By PoE

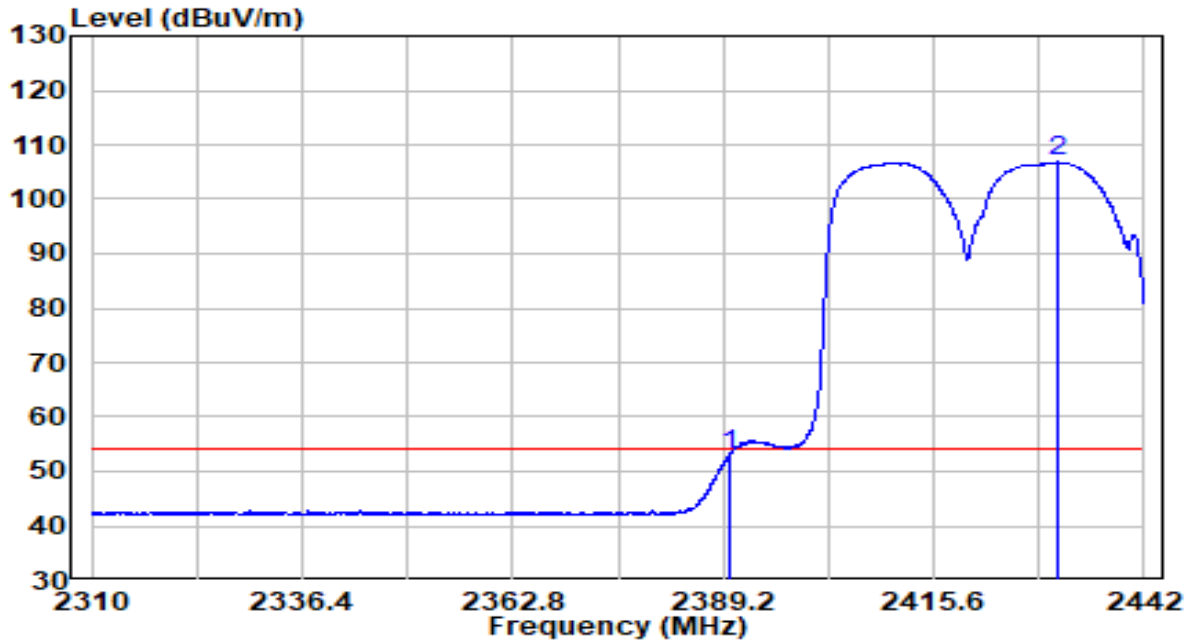


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	20.88	32.22	53.10	-0.90	54.00	Average
2	* 2431.176	74.41	32.39	106.80	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	By PoE

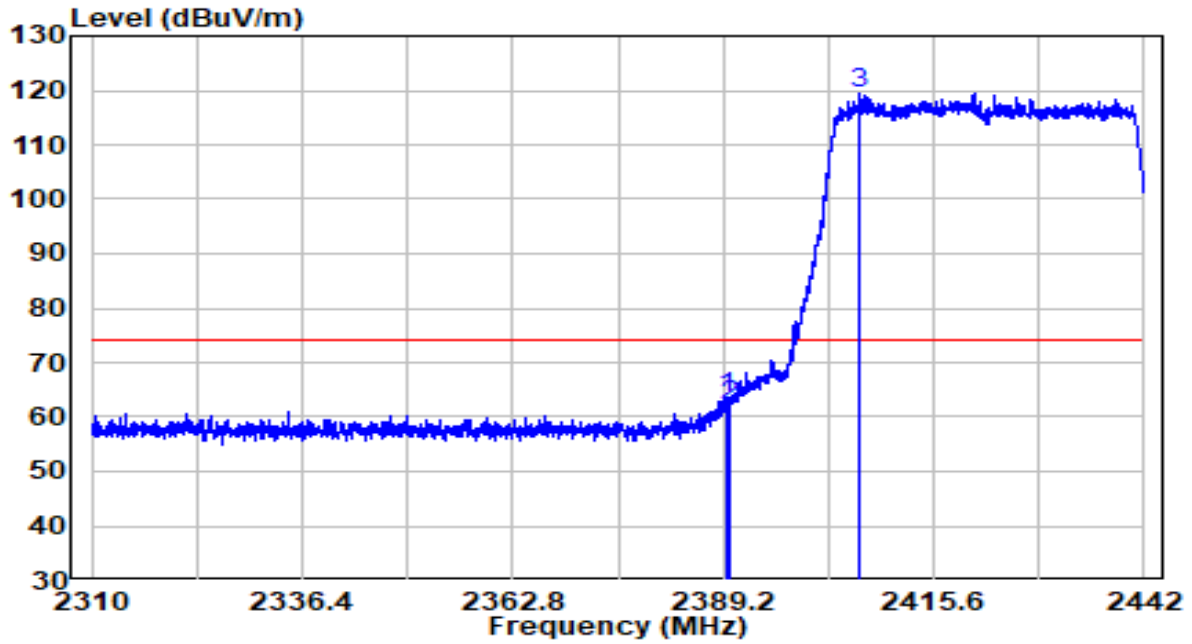


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2389.530	31.50	32.22	63.72	-10.28	74.00	Peak
2	2390.000	29.90	32.22	62.12	-11.88	74.00	Peak
3	* 2406.228	87.33	32.29	119.61	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	By PoE

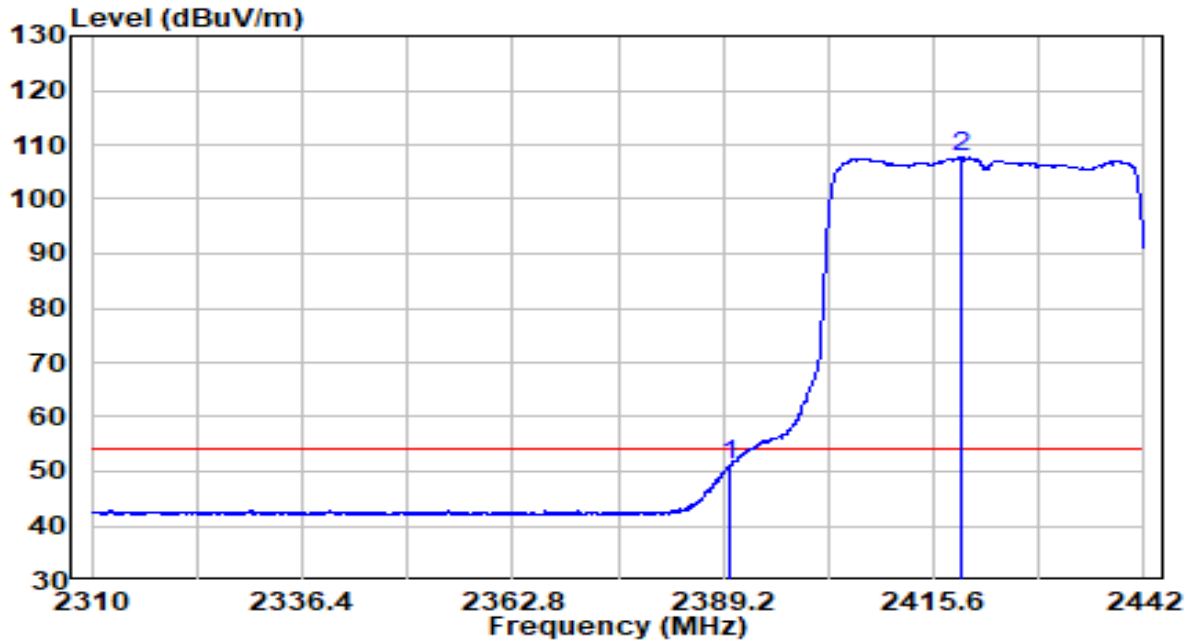


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	18.81	32.22	51.03	-2.97	54.00	Average
2	* 2419.032	75.28	32.34	107.62	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	By PoE

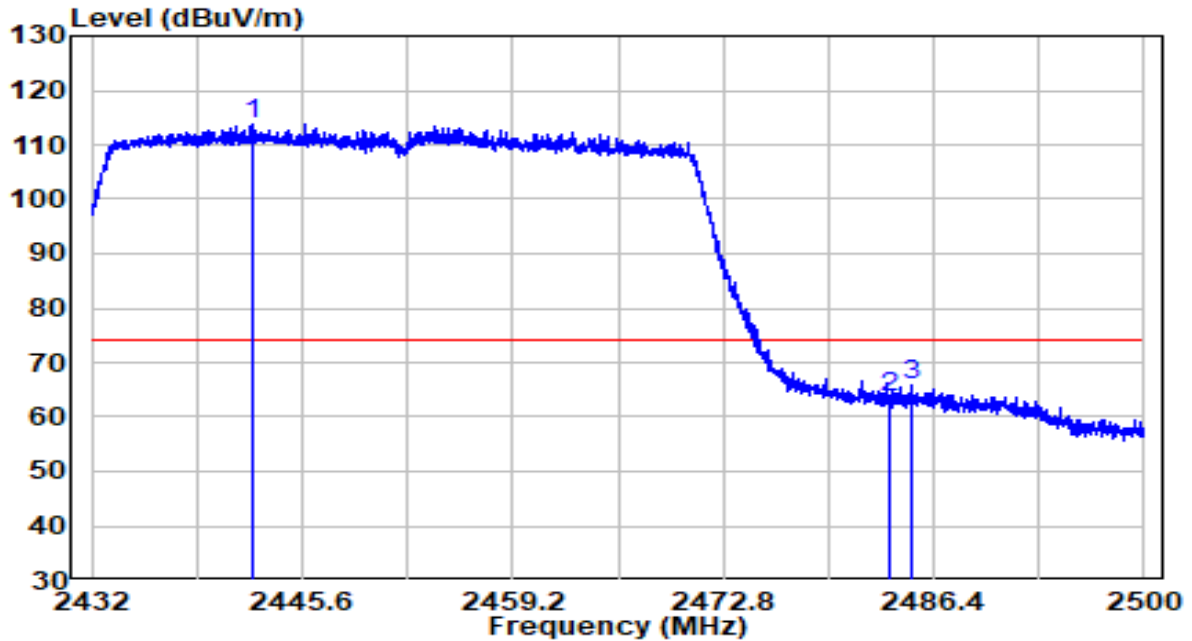


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)	
1	*	2442.472	81.50	32.44	113.94	N/A	N/A	Peak
2		2483.500	31.16	32.61	63.77	-10.23	74.00	Peak
3		2485.040	33.35	32.62	65.97	-8.03	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	By PoE

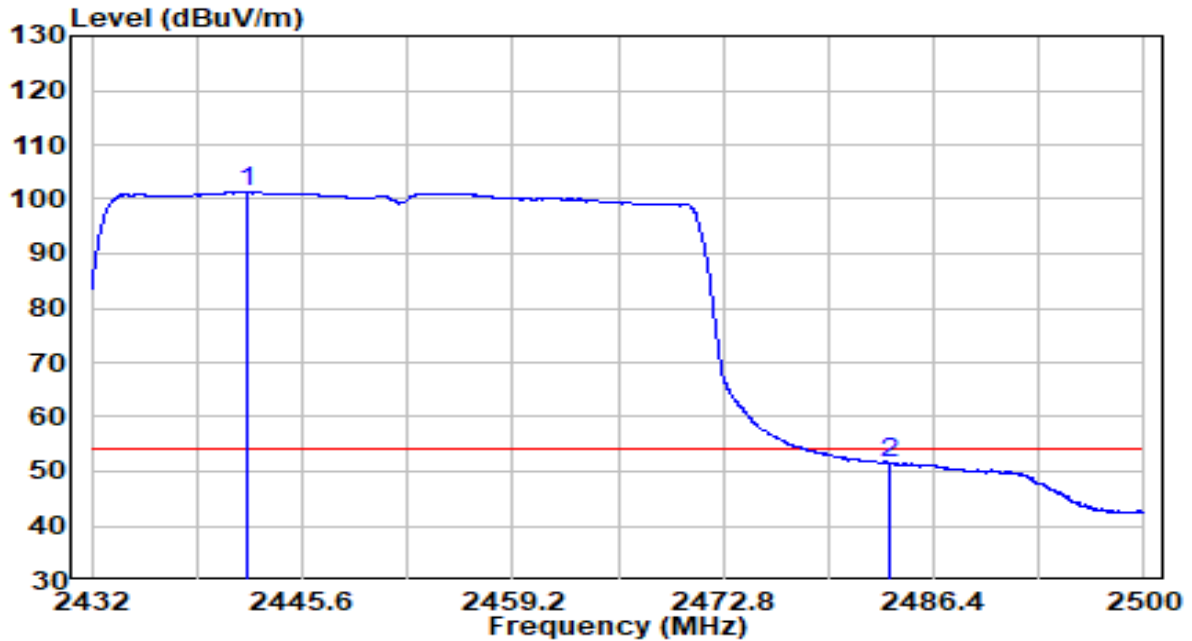


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2442.030	68.90	32.44	101.34	N/A	N/A	Average
2	2483.500	18.84	32.61	51.45	-2.55	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	By PoE

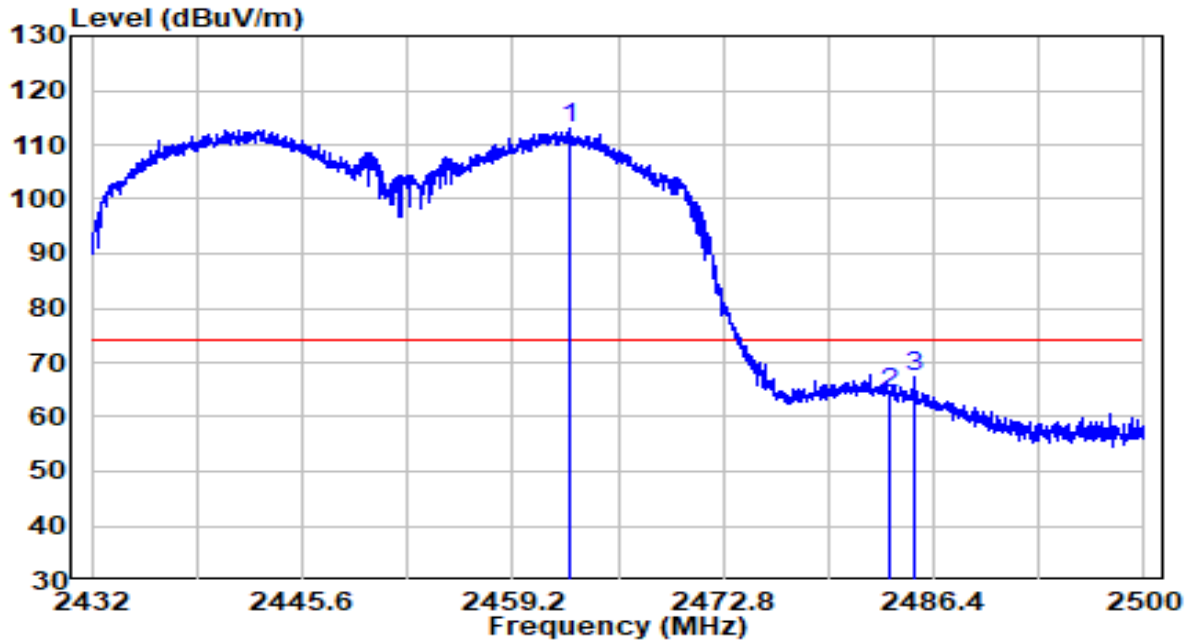


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2462.872	80.39	32.52	112.91	N/A	N/A	Peak
2	2483.500	31.86	32.61	64.47	-9.53	74.00	Peak
3	2485.210	34.84	32.62	67.46	-6.54	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-09-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	By PoE

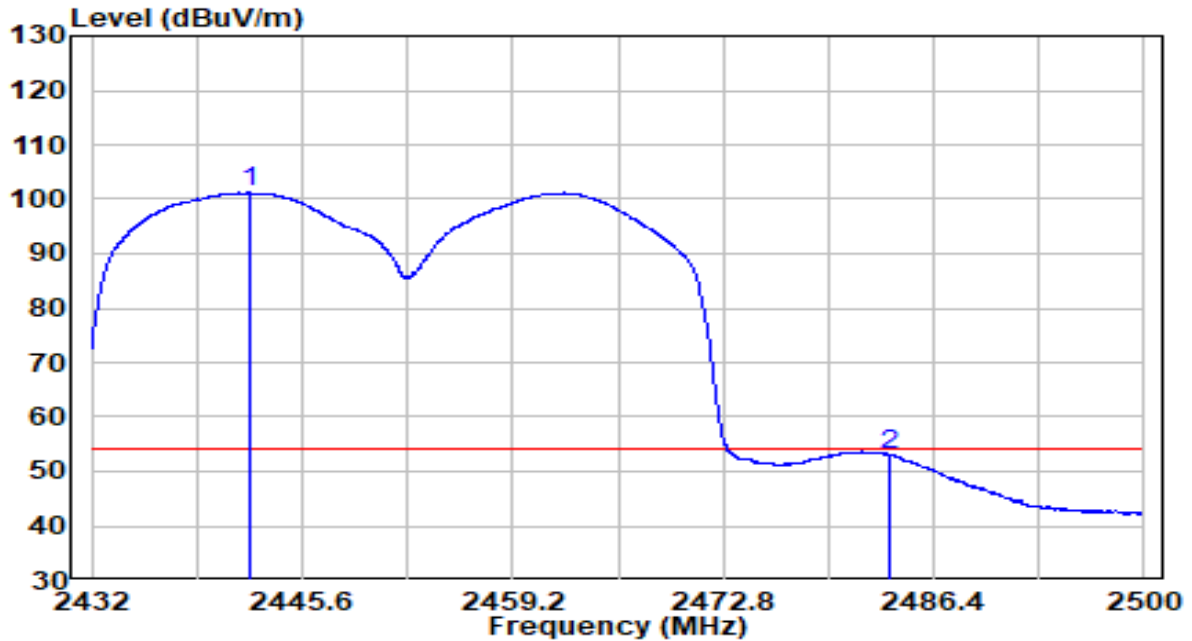


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2442.200	68.71	32.44	101.14	N/A	N/A	Average
2	2483.500	20.46	32.61	53.07	-0.93	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

**APEX0584 Filter 2# & ANT Model No.: ANT-2x2-2005**

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2412MHz	Test Voltage	By PoE

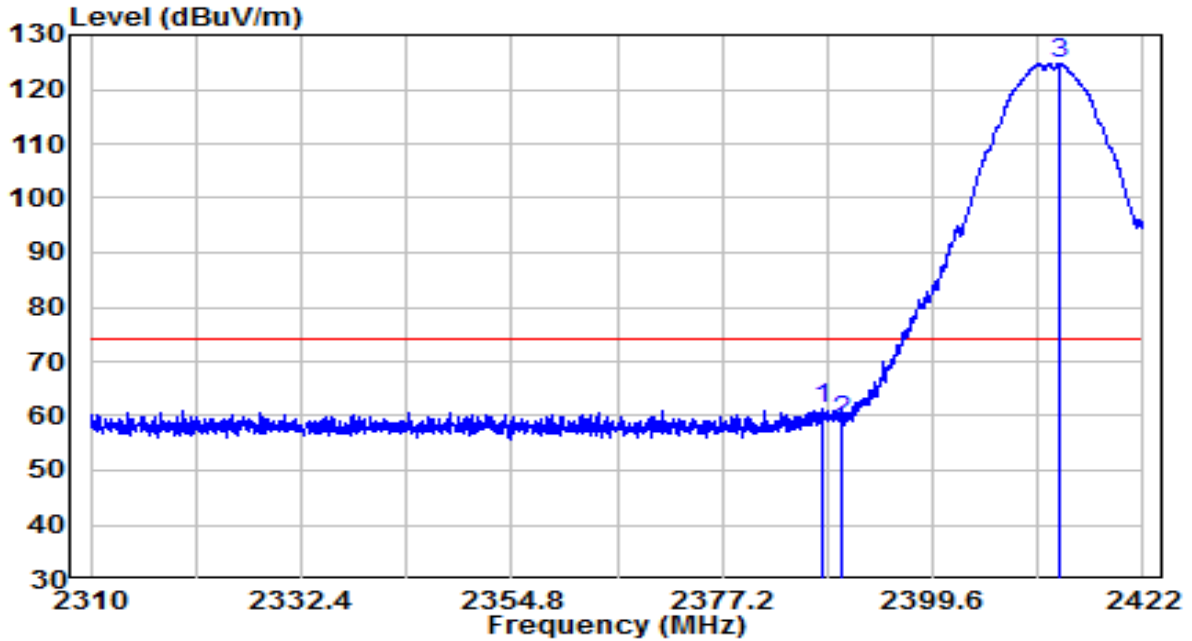


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2387.784	29.04	32.21	61.25	-12.75	74.00	Peak
2	2390.000	26.86	32.22	59.08	-14.92	74.00	Peak
3	* 2413.096	92.43	32.32	124.75	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2412MHz	Test Voltage	By PoE

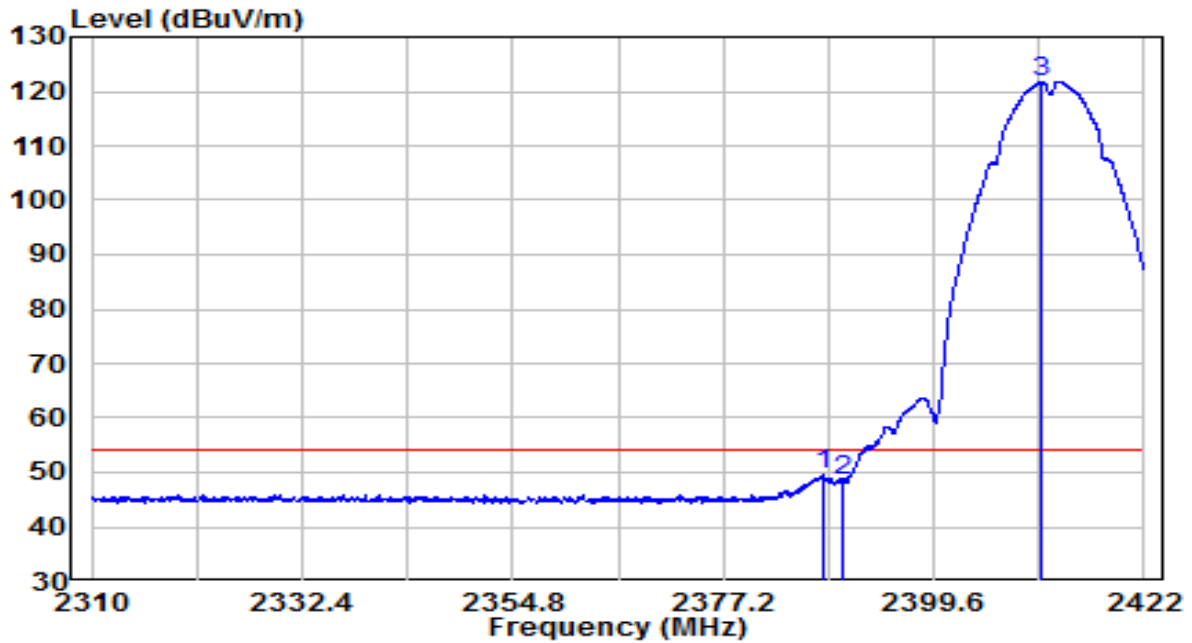


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2387.728	17.38	32.21	49.59	-4.41	54.00	Average
2	2390.000	16.34	32.22	48.55	-5.45	54.00	Average
3	* 2411.136	89.52	32.31	121.82	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2412MHz	Test Voltage	By PoE

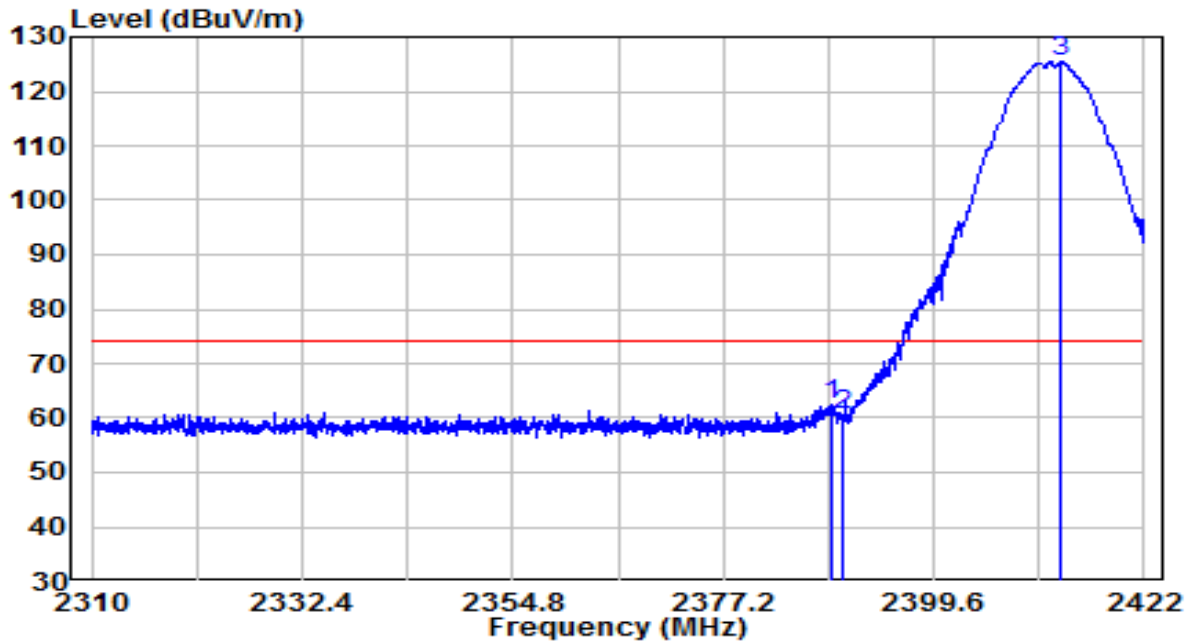


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2388.624	30.30	32.21	62.52	-11.48	74.00	Peak
2	2390.000	28.32	32.22	60.53	-13.47	74.00	Peak
3	* 2413.096	93.11	32.32	125.42	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2412MHz	Test Voltage	By PoE

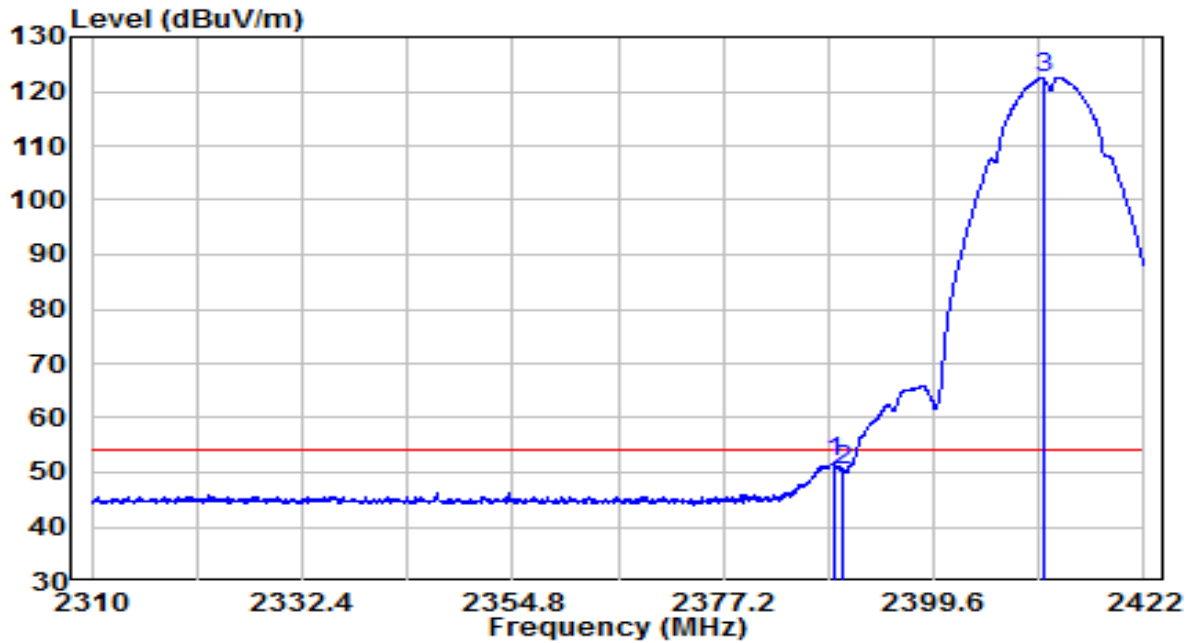


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2388.960	19.65	32.21	51.86	-2.14	54.00	Average
2	2390.000	18.01	32.22	50.23	-3.77	54.00	Average
3	* 2411.248	90.27	32.31	122.58	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor)

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2412MHz	Test Voltage	By PoE

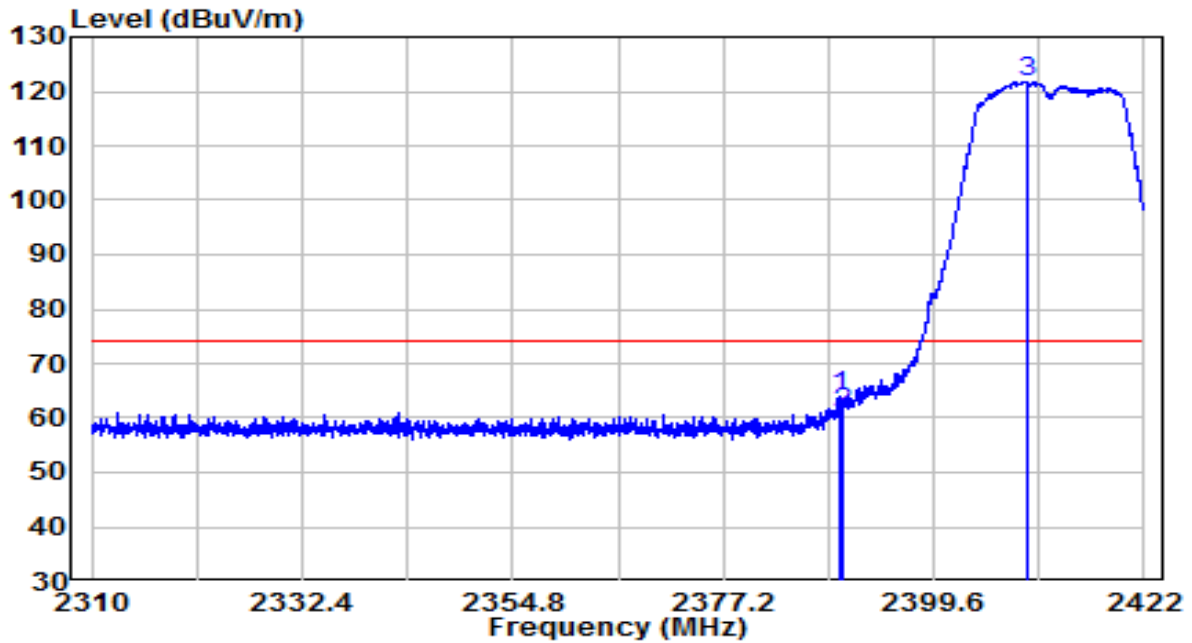


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2389.688	31.71	32.22	63.92	-10.08	74.00	Peak
2	2390.000	28.61	32.22	60.83	-13.17	74.00	Peak
3	* 2409.624	89.48	32.30	121.78	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2412MHz	Test Voltage	By PoE

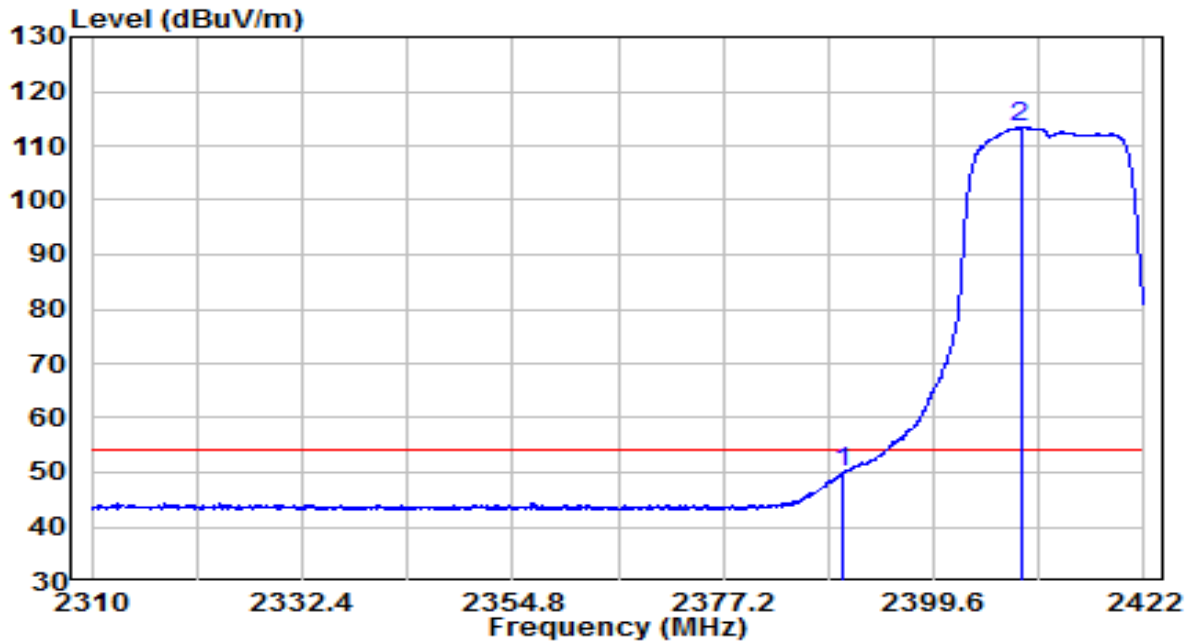


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	17.91	32.22	50.13	-3.87	54.00	Average
2	* 2408.840	81.02	32.30	113.32	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2412MHz	Test Voltage	By PoE

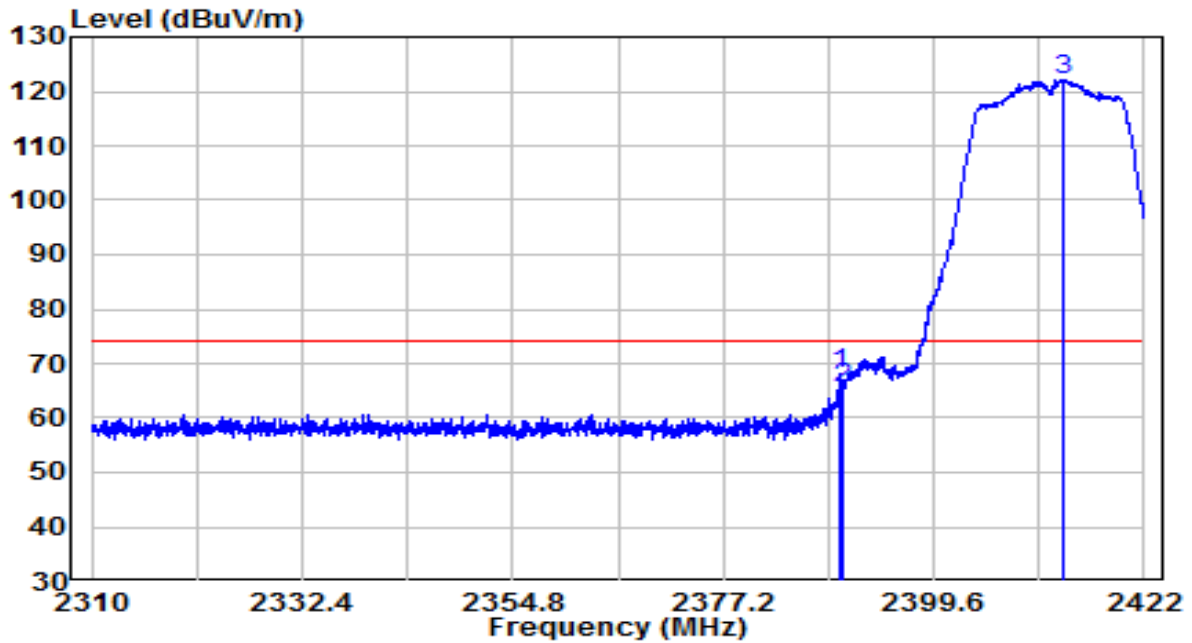


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.632	36.07	32.22	68.28	-5.72	74.00	Peak
2	2390.000	33.30	32.22	65.51	-8.49	74.00	Peak
3	* 2413.376	89.80	32.32	122.11	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2412MHz	Test Voltage	By PoE

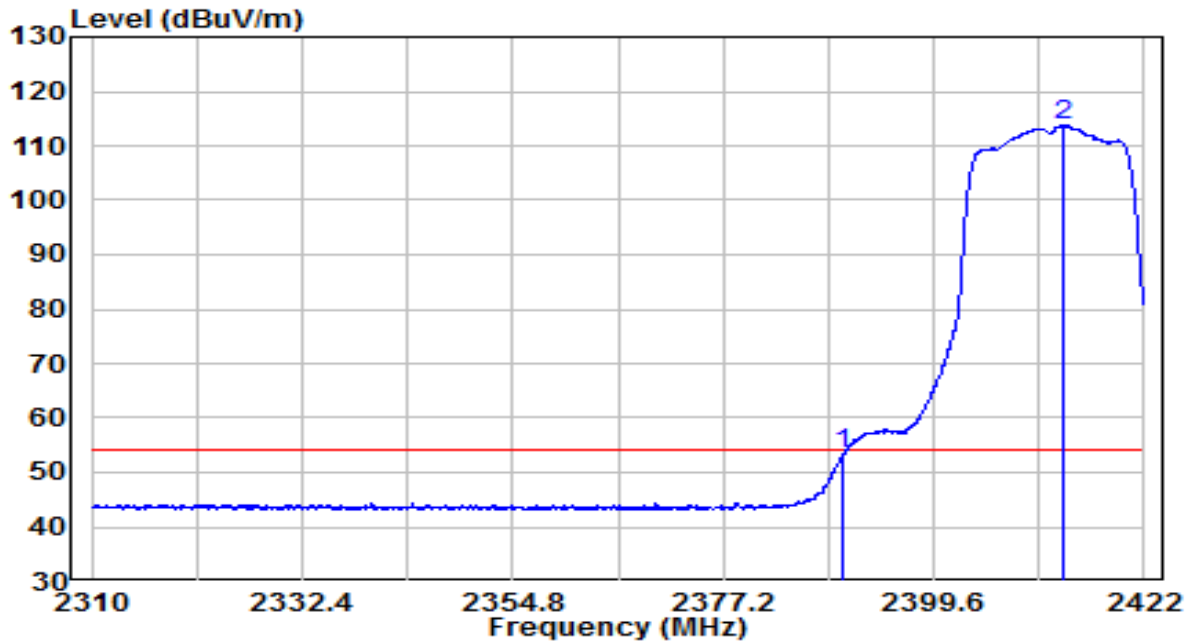


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	21.22	32.22	53.44	-0.56	54.00	Average
2	* 2413.376	81.37	32.32	113.68	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2412MHz	Test Voltage	By PoE

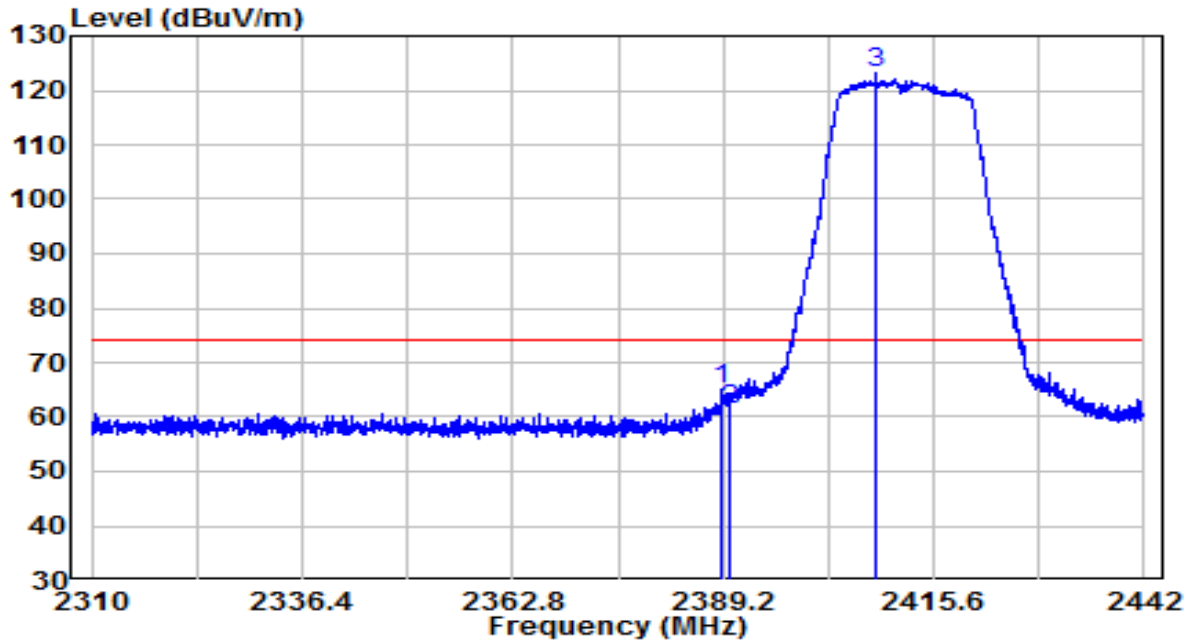


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2388.870	32.76	32.21	64.97	-9.03	74.00	Peak
2	2390.000	29.27	32.22	61.48	-12.52	74.00	Peak
3	* 2408.274	90.92	32.29	123.22	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2412MHz	Test Voltage	By PoE

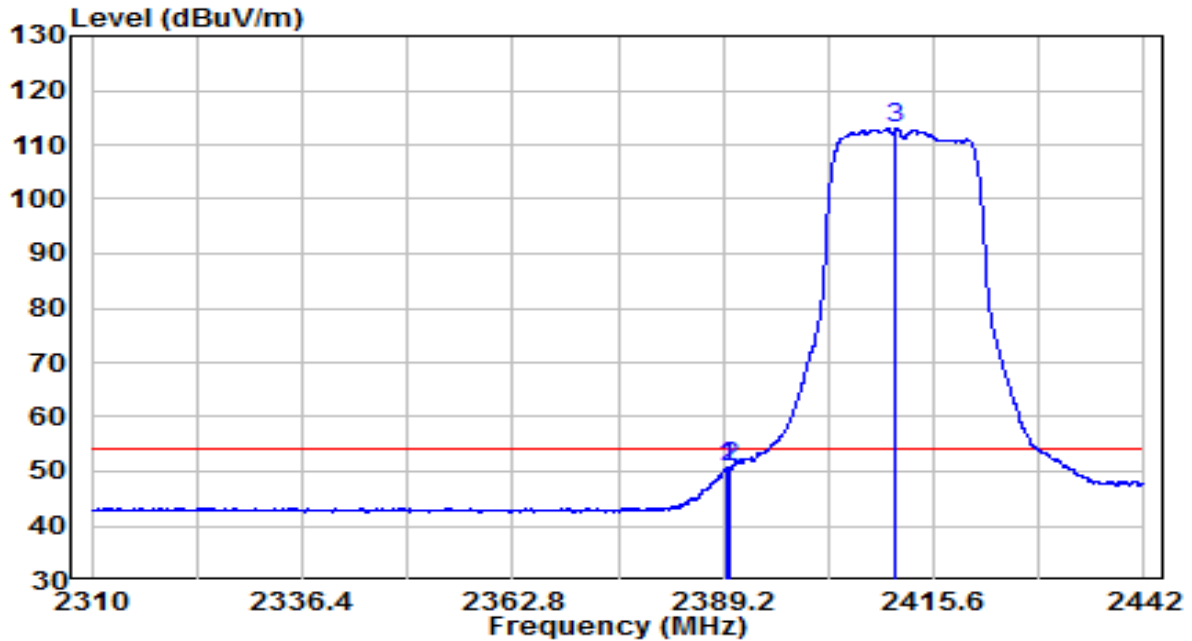


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.530	18.37	32.22	50.59	-3.41	54.00	Average
2	2390.000	18.47	32.22	50.68	-3.32	54.00	Average
3	* 2410.914	80.60	32.31	112.91	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2412MHz	Test Voltage	By PoE

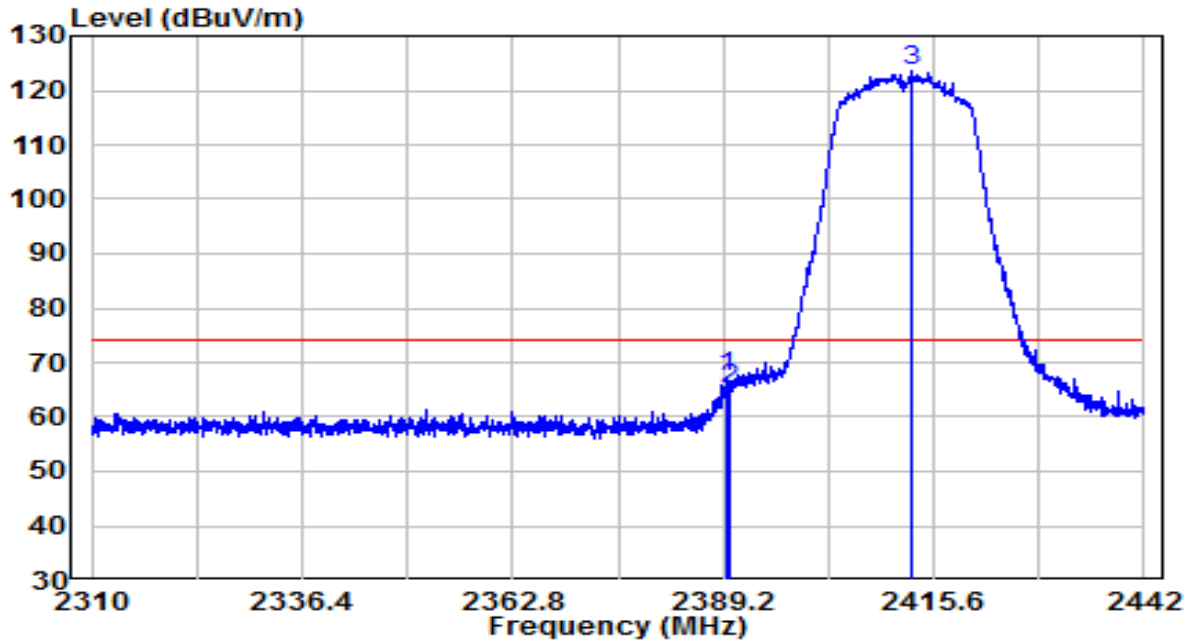


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.728	35.01	32.22	67.23	-6.77	74.00	Peak
2	2390.000	33.06	32.22	65.28	-8.72	74.00	Peak
3	* 2412.696	91.42	32.31	123.74	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2412MHz	Test Voltage	By PoE

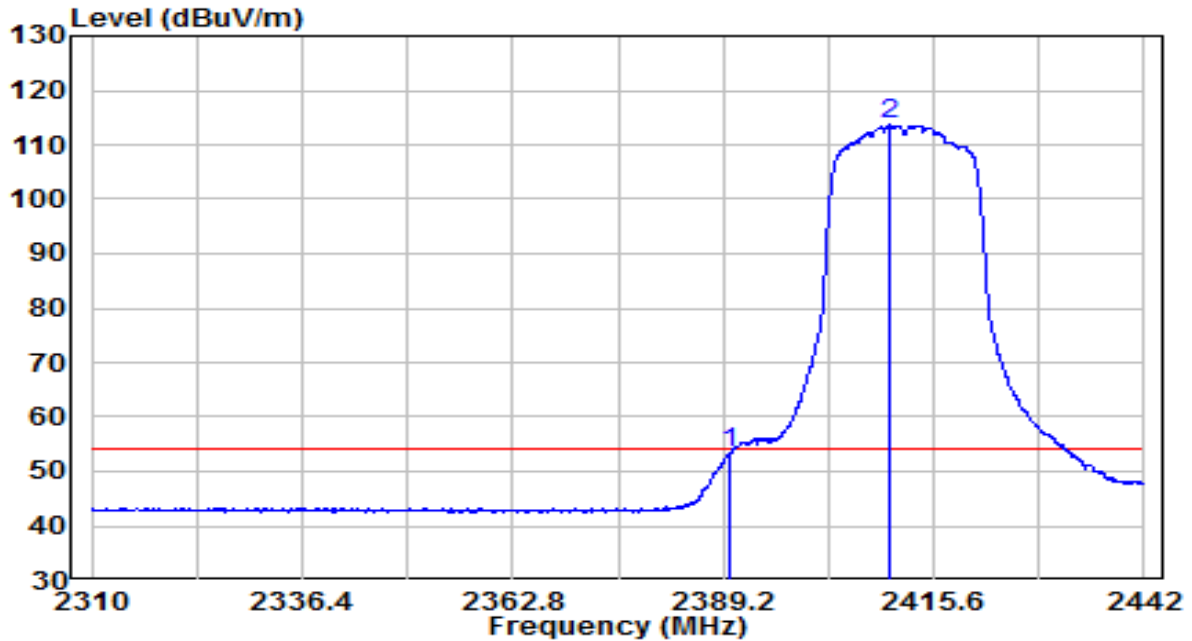


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	21.07	32.22	53.28	-0.72	54.00	Average
2	* 2410.056	81.30	32.30	113.60	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2422MHz	Test Voltage	By PoE

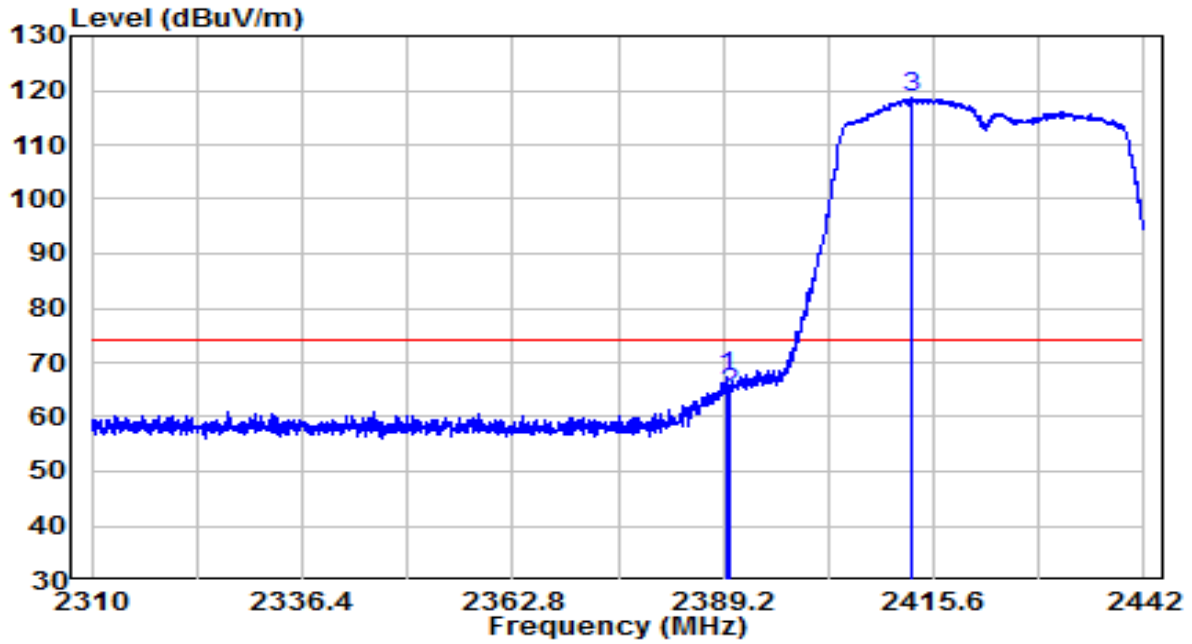


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.596	35.09	32.22	67.31	-6.69	74.00	Peak
2	2390.000	32.01	32.22	64.23	-9.77	74.00	Peak
3	* 2412.960	86.20	32.31	118.51	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2422MHz	Test Voltage	By PoE

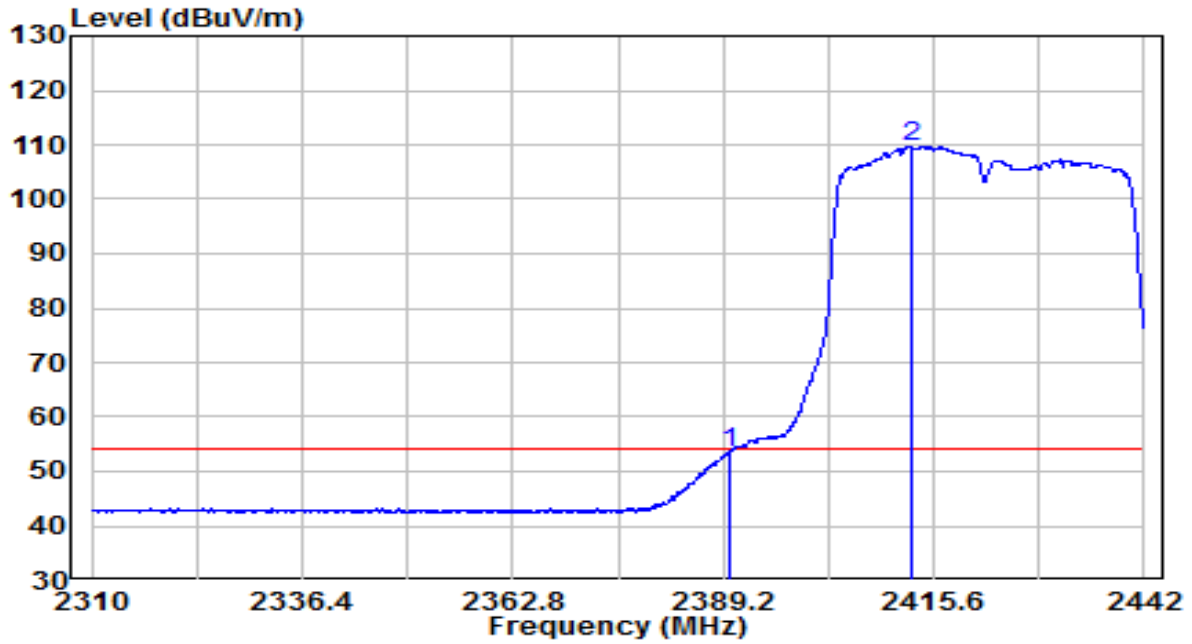


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	21.24	32.22	53.46	-0.54	54.00	Average
2	* 2412.828	77.37	32.31	109.68	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2422MHz	Test Voltage	By PoE

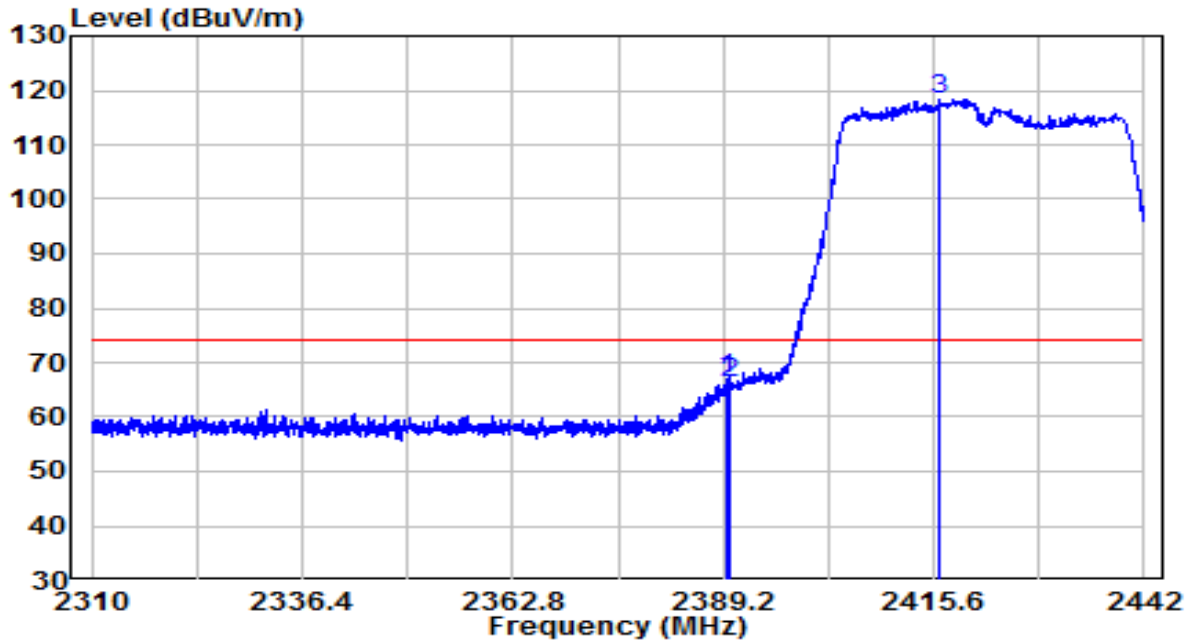


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.530	34.86	32.22	67.07	-6.93	74.00	Peak
2	2390.000	33.98	32.22	66.19	-7.81	74.00	Peak
3	* 2416.260	86.00	32.33	118.33	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2422MHz	Test Voltage	By PoE

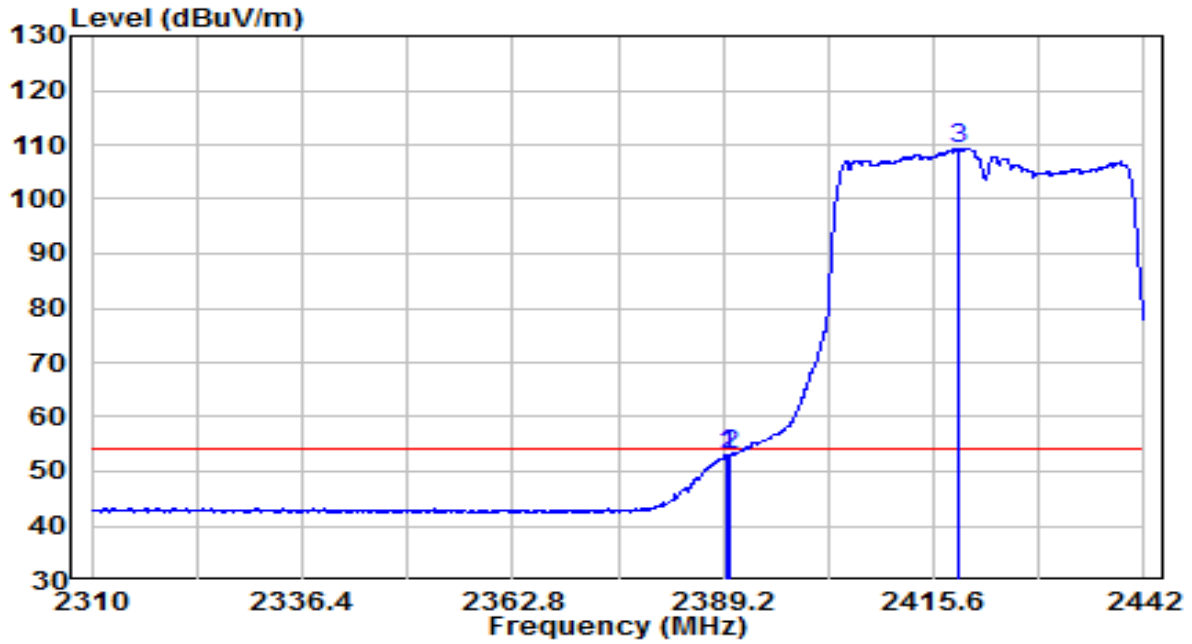


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.662	20.76	32.22	52.97	-1.03	54.00	Average
2	2390.000	20.71	32.22	52.93	-1.07	54.00	Average
3	* 2418.768	76.96	32.34	109.30	N/A	N/A	Average

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz	Test Voltage	By PoE

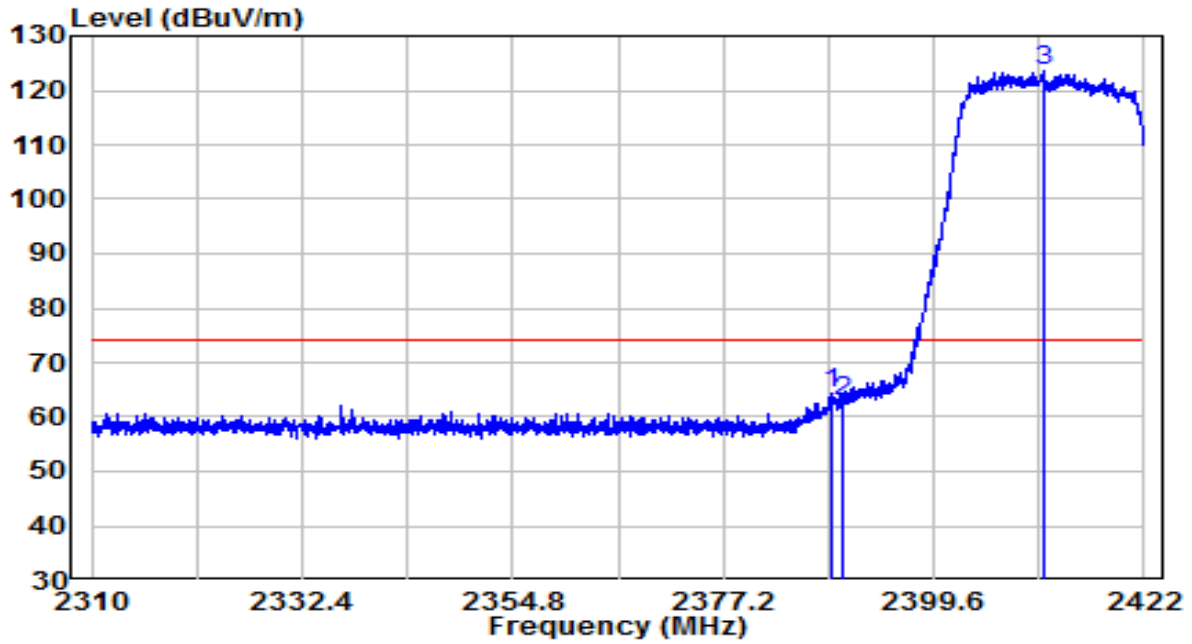


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2388.848	31.98	32.21	64.19	-9.81	74.00	Peak
2	2390.000	30.57	32.22	62.79	-11.21	74.00	Peak
3	* 2411.304	91.18	32.31	123.49	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz	Test Voltage	By PoE

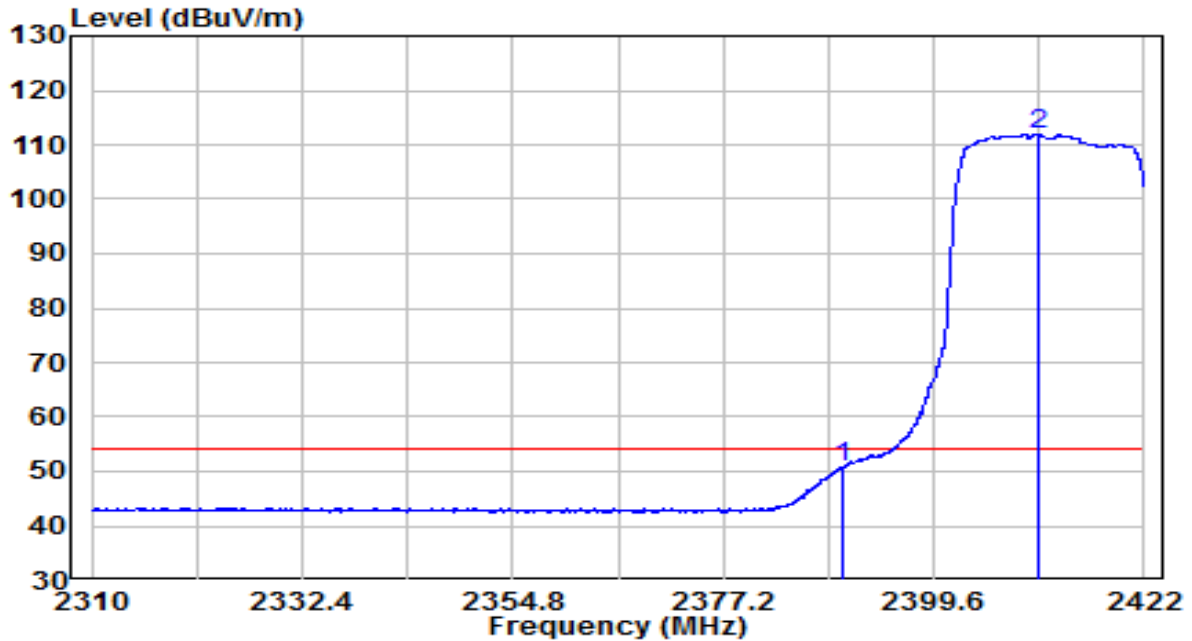


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	18.70	32.22	50.92	-3.08	54.00	Average
2	* 2410.856	79.65	32.31	111.96	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz	Test Voltage	By PoE

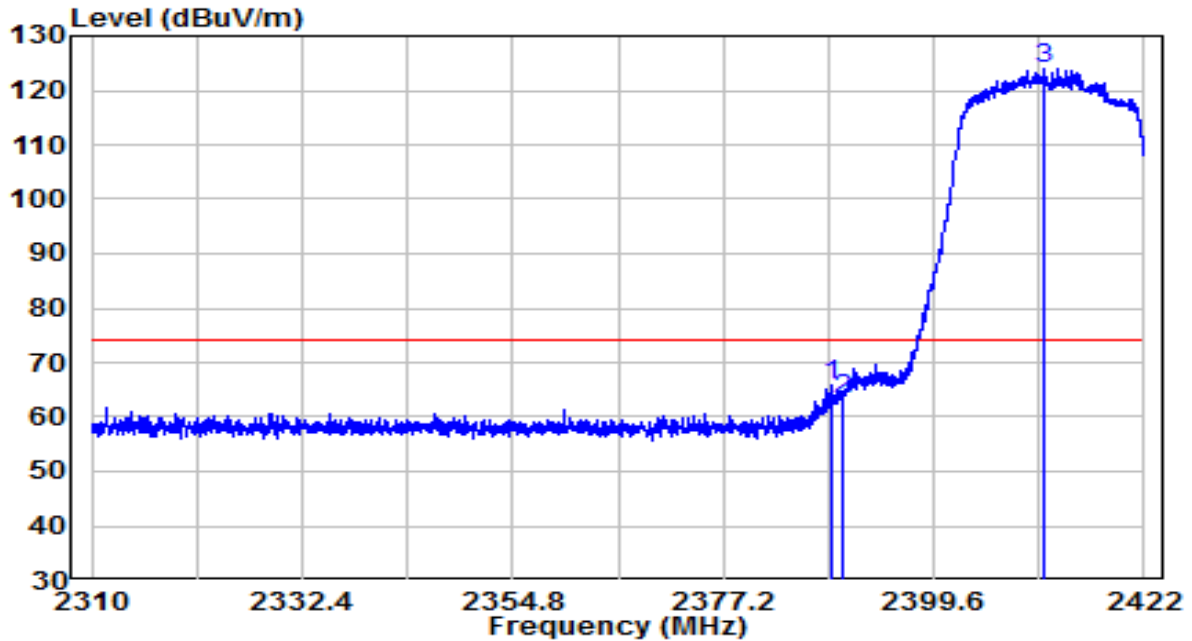


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2388.624	33.74	32.21	65.95	-8.05	74.00	Peak
2	2390.000	31.16	32.22	63.37	-10.63	74.00	Peak
3	* 2411.304	91.81	32.31	124.12	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412MHz	Test Voltage	By PoE

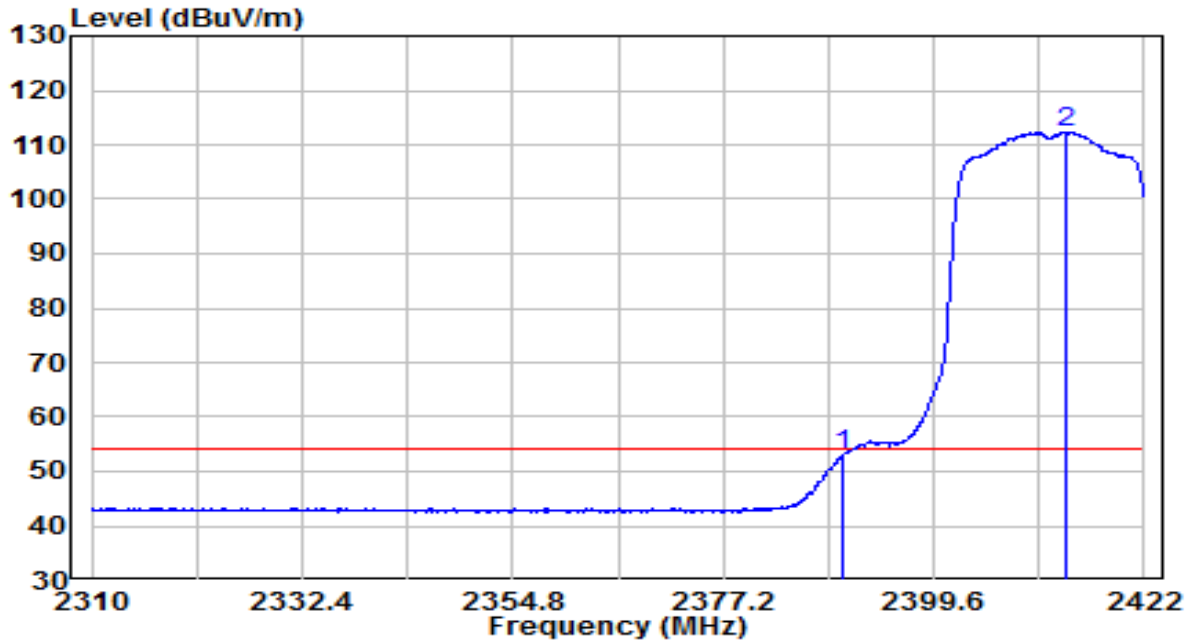


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	20.83	32.22	53.05	-0.95	54.00	Average
2	* 2413.712	80.00	32.32	112.31	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	By PoE

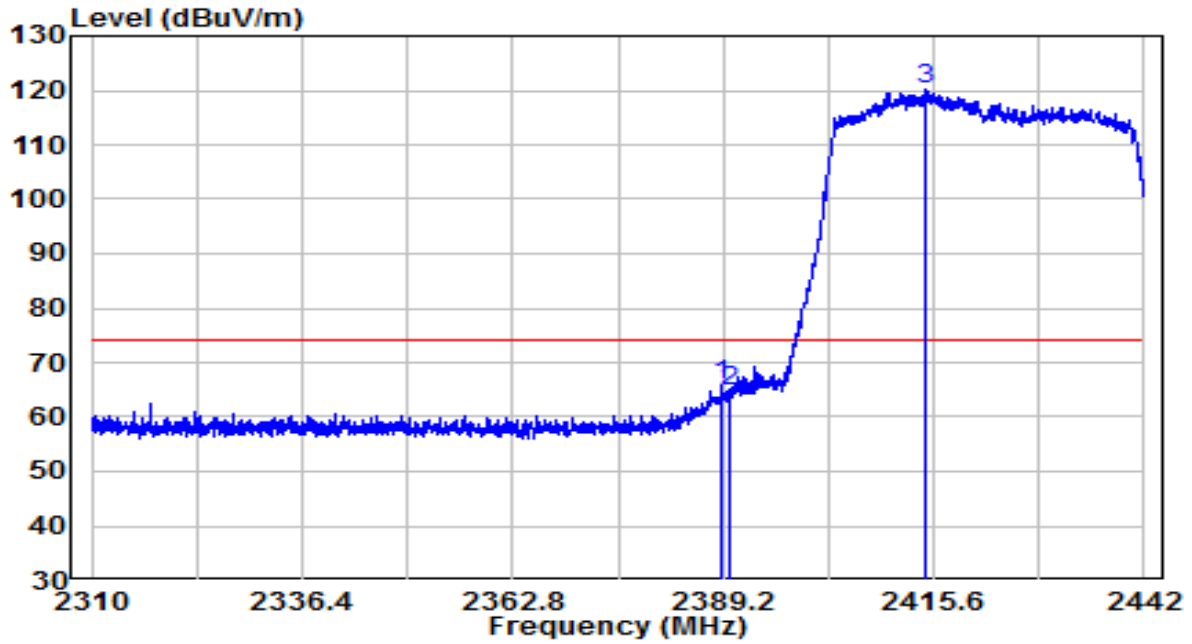


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.002	33.63	32.21	65.84	-8.16	74.00	Peak
2	2390.000	32.64	32.22	64.86	-9.14	74.00	Peak
3	* 2414.412	87.78	32.32	120.10	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	By PoE

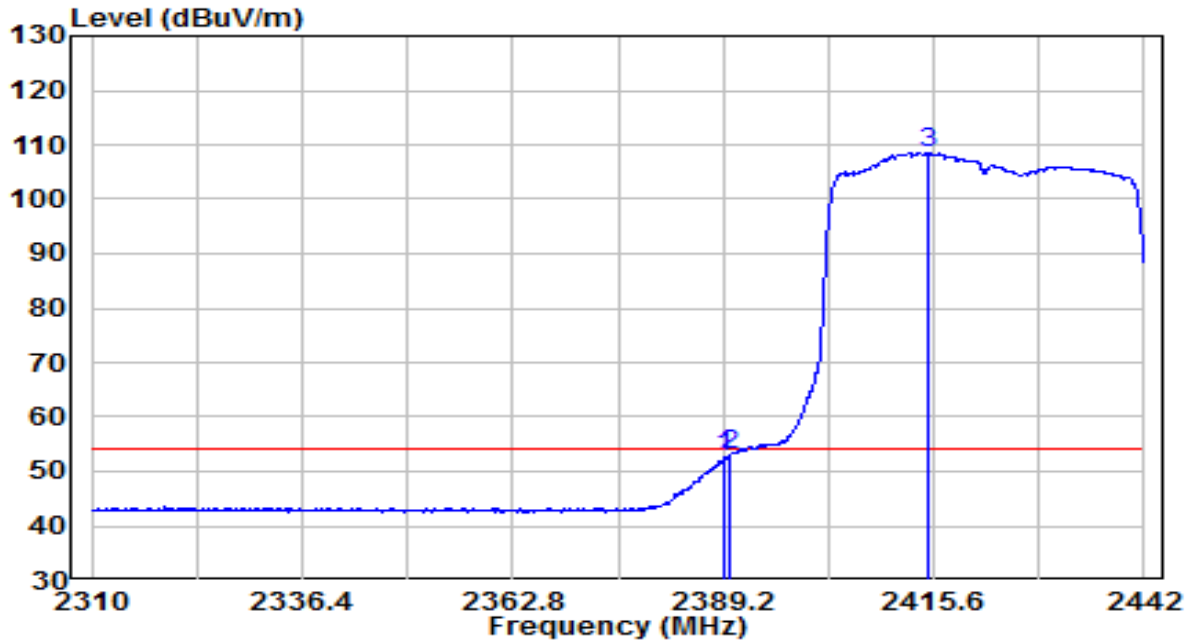


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.398	20.36	32.22	52.58	-1.42	54.00	Average
2	2390.000	20.67	32.22	52.89	-1.11	54.00	Average
3	* 2414.874	76.21	32.32	108.53	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	By PoE

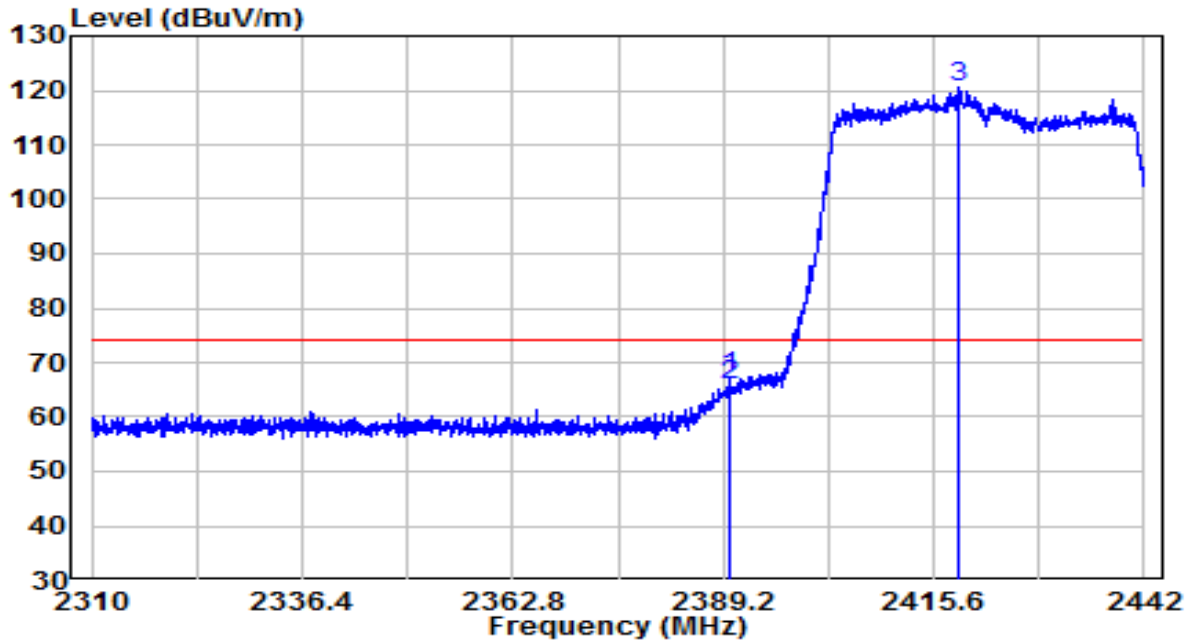


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.926	35.29	32.22	67.51	-6.49	74.00	Peak
2	2390.000	33.77	32.22	65.99	-8.01	74.00	Peak
3	* 2418.570	88.19	32.34	120.53	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	By PoE

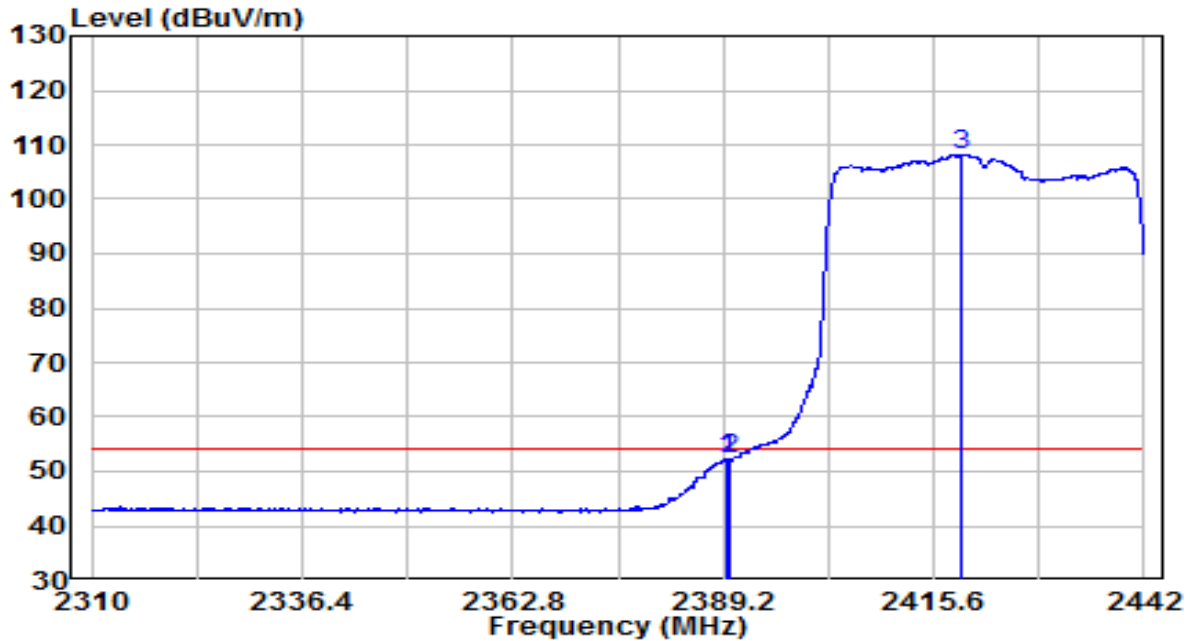


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2389.596	20.06	32.22	52.28	-1.72	54.00	Average
2	2390.000	19.95	32.22	52.17	-1.83	54.00	Average
3	* 2419.164	75.83	32.34	108.17	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

**APEX0584 Filter 3# & ANT Model No.: ANT-2x2-2005**

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2462MHz	Test Voltage	By PoE

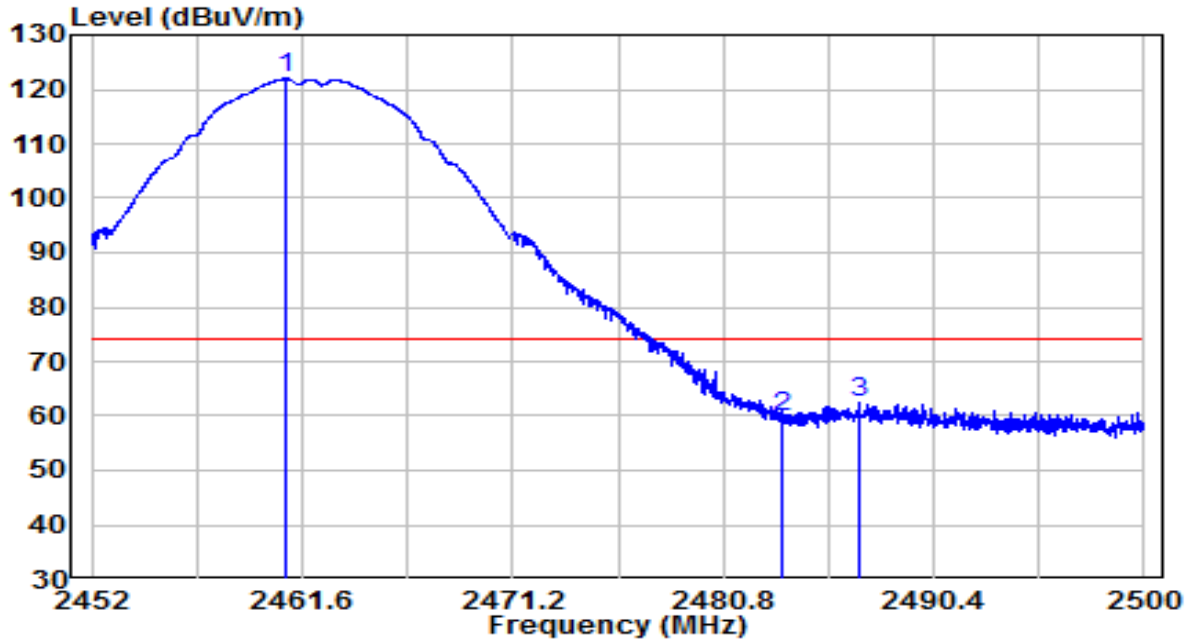


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2460.808	89.45	32.52	121.97	N/A	N/A	Peak
2	2483.500	27.05	32.61	59.66	-14.34	74.00	Peak
3	2487.016	29.79	32.63	62.42	-11.58	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2462MHz	Test Voltage	By PoE

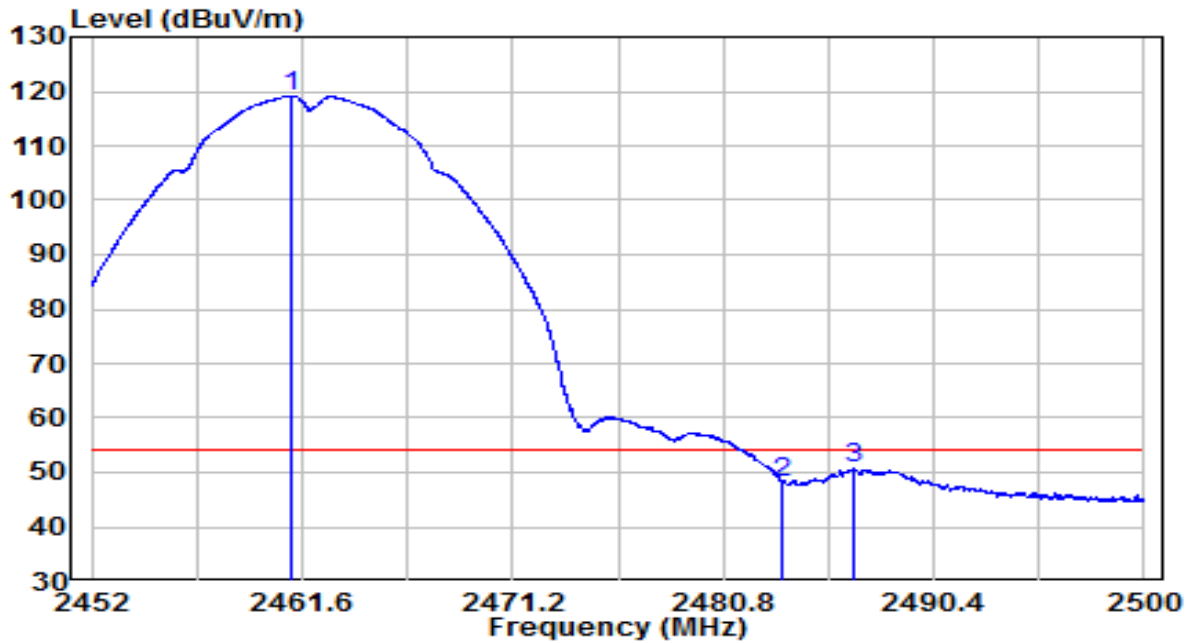


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	86.64	32.52	119.16	N/A	N/A	Average
2		15.61	32.61	48.22	-5.78	54.00	Average
3		18.09	32.62	50.72	-3.28	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2462MHz	Test Voltage	By PoE

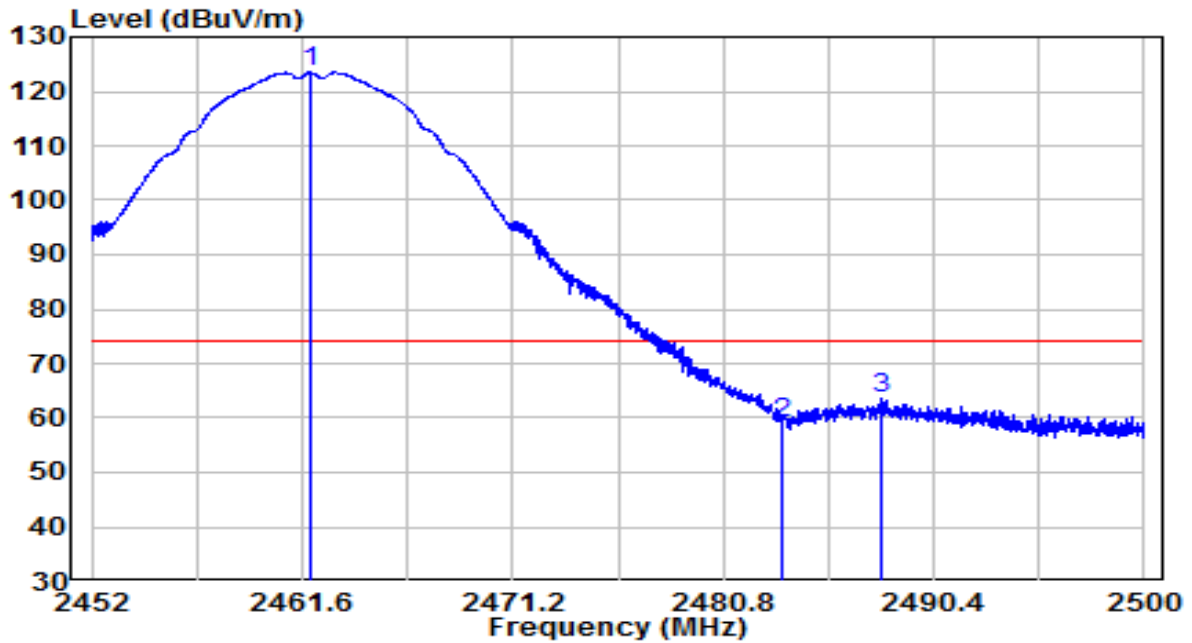


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2461.960	90.95	32.52	123.47	N/A	N/A	Peak
2	2483.500	26.47	32.61	59.08	-14.92	74.00	Peak
3	2488.000	30.79	32.63	63.42	-10.58	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2462MHz	Test Voltage	By PoE

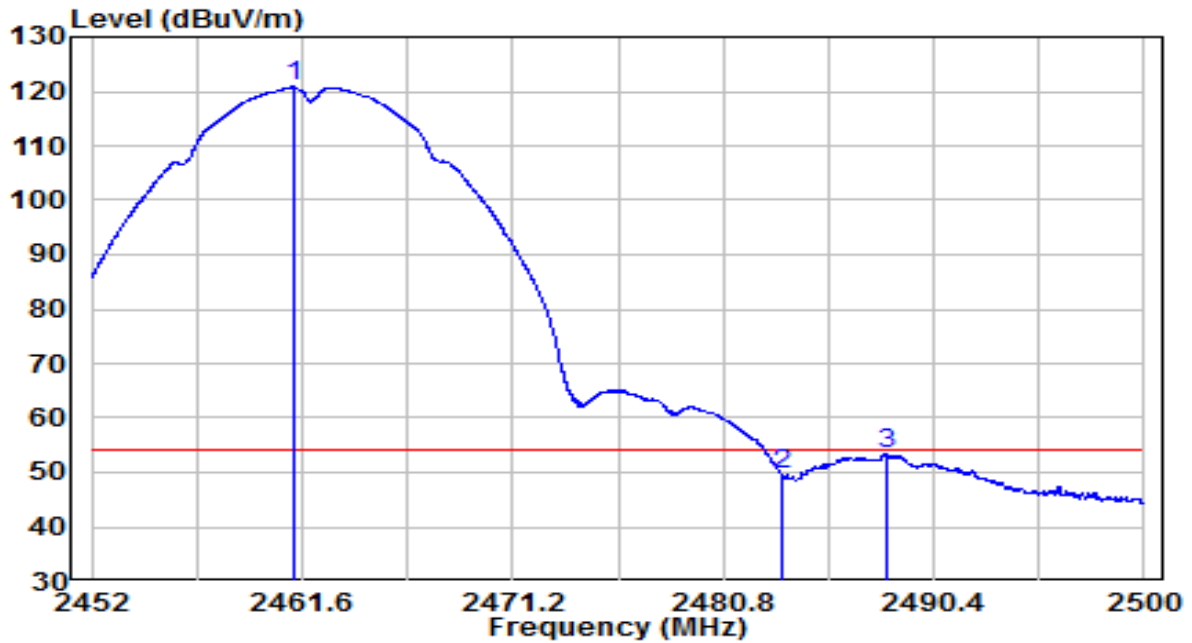


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2461.192	88.26	32.52	120.78	N/A	N/A	Average
2	2483.500	16.90	32.61	49.52	-4.48	54.00	Average
3	2488.240	20.73	32.63	53.36	-0.64	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2462MHz	Test Voltage	By PoE

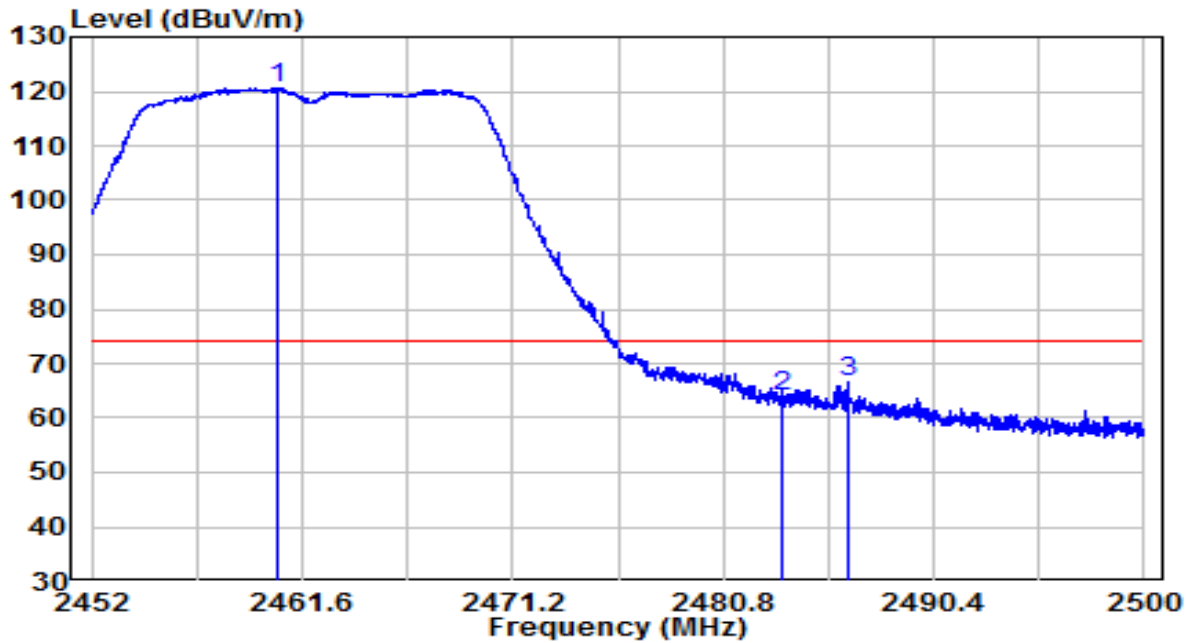


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2460.496	88.00	32.51	120.52	N/A	N/A	Peak
2	2483.500	31.28	32.61	63.89	-10.11	74.00	Peak
3	2486.464	33.93	32.62	66.55	-7.45	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2462MHz	Test Voltage	By PoE

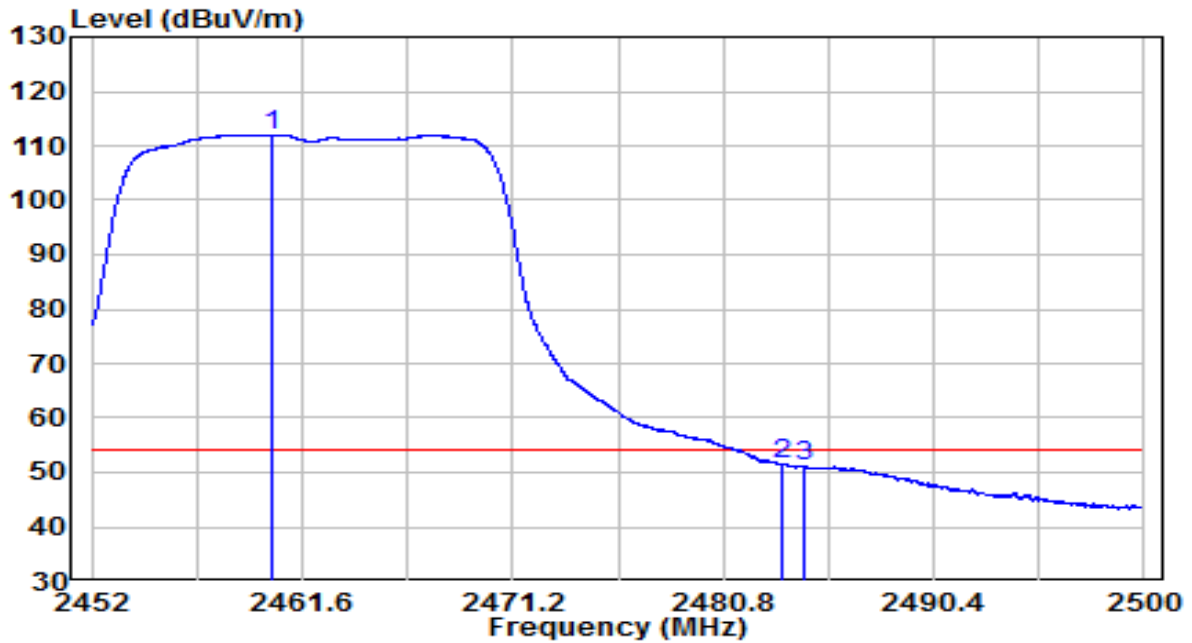


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2460.208	79.53	32.51	112.05	N/A	N/A	Average
2	2483.500	18.87	32.61	51.48	-2.52	54.00	Average
3	2484.448	18.68	32.61	51.30	-2.70	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2462MHz	Test Voltage	By PoE

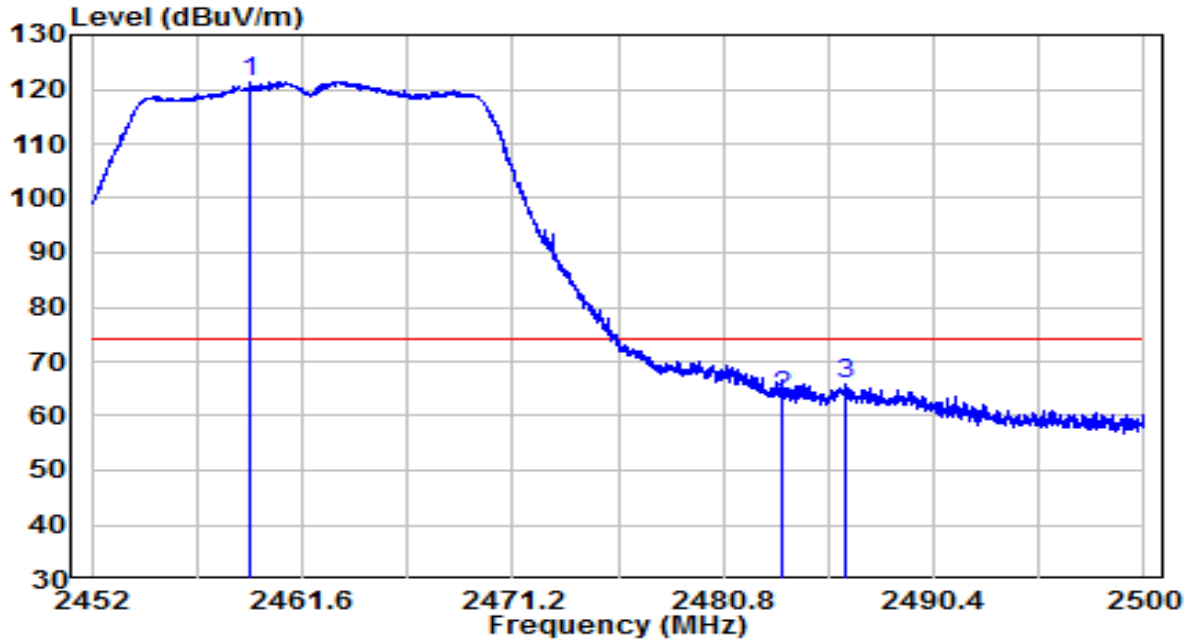


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2459.248	88.89	32.51	121.40	N/A	N/A	Peak
2		2483.500	30.96	32.61	63.57	-10.43	74.00	Peak
3		2486.416	33.34	32.62	65.96	-8.04	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2462MHz	Test Voltage	By PoE

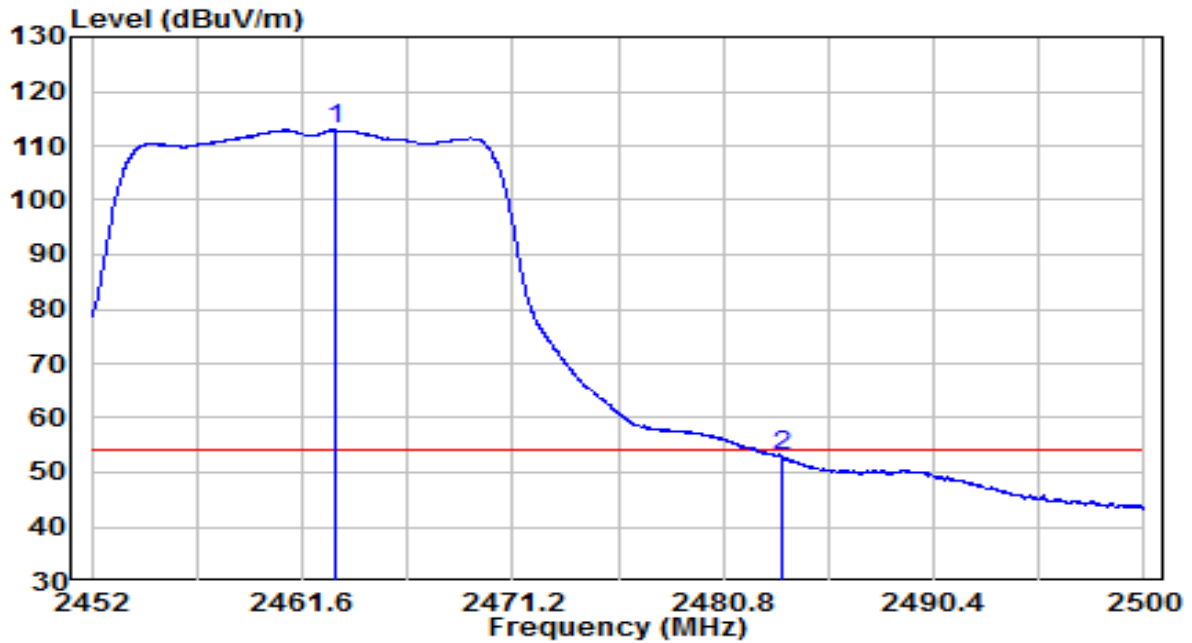


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2463.088	80.37	32.52	112.90	N/A	N/A	Average
2	2483.500	20.23	32.61	52.84	-1.16	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2462MHz	Test Voltage	By PoE

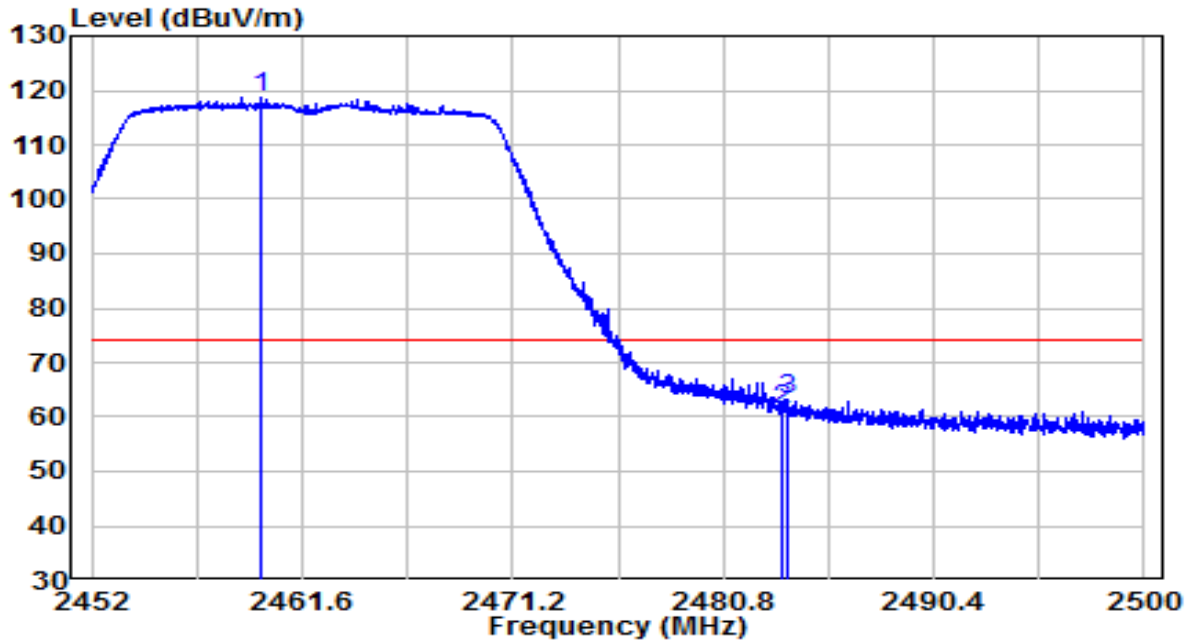


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2459.680	86.17	32.51	118.68	N/A	N/A	Peak
2	2483.500	28.79	32.61	61.40	-12.60	74.00	Peak
3	2483.728	30.54	32.61	63.15	-10.85	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2462MHz	Test Voltage	By PoE

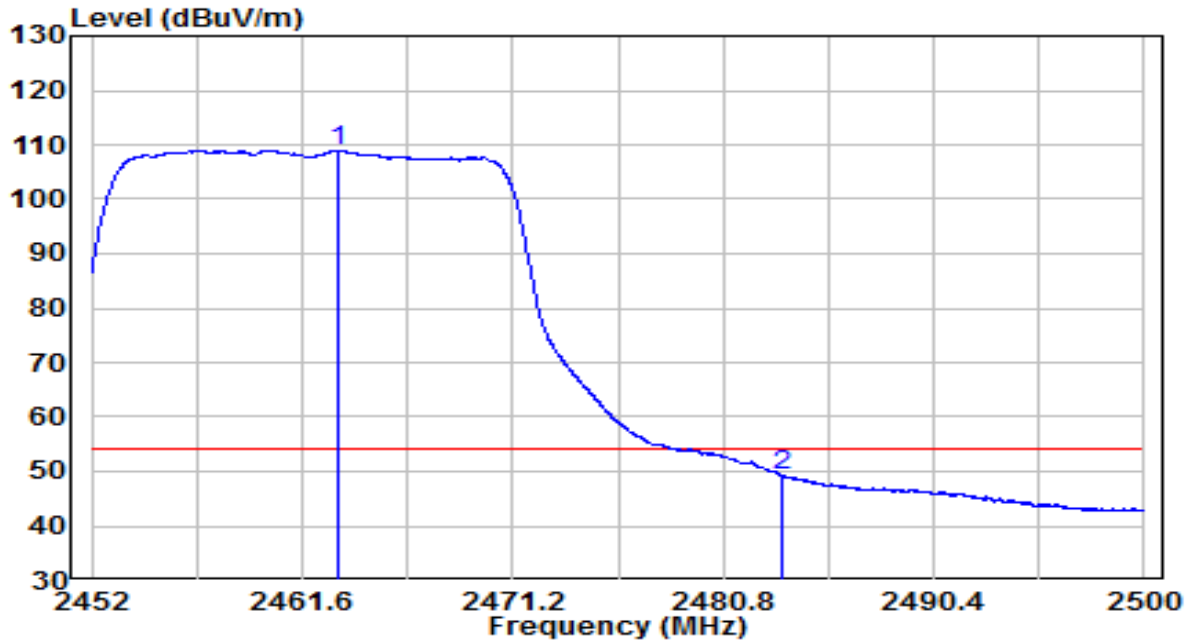


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	*	76.40	32.53	108.93	N/A	N/A	Average
2		16.65	32.61	49.26	-4.74	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2462MHz	Test Voltage	By PoE

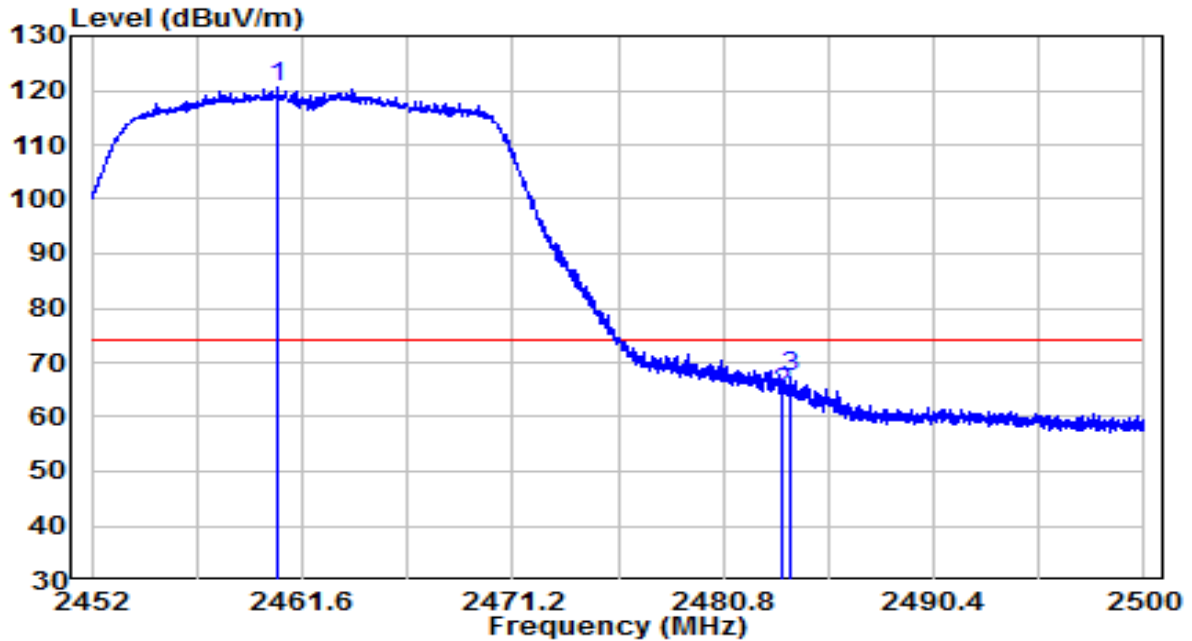


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2460.472	87.88	32.51	120.40	N/A	N/A	Peak
2	2483.500	31.76	32.61	64.37	-9.63	74.00	Peak
3	2483.824	34.61	32.61	67.22	-6.78	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at Channel 2462MHz	Test Voltage	By PoE

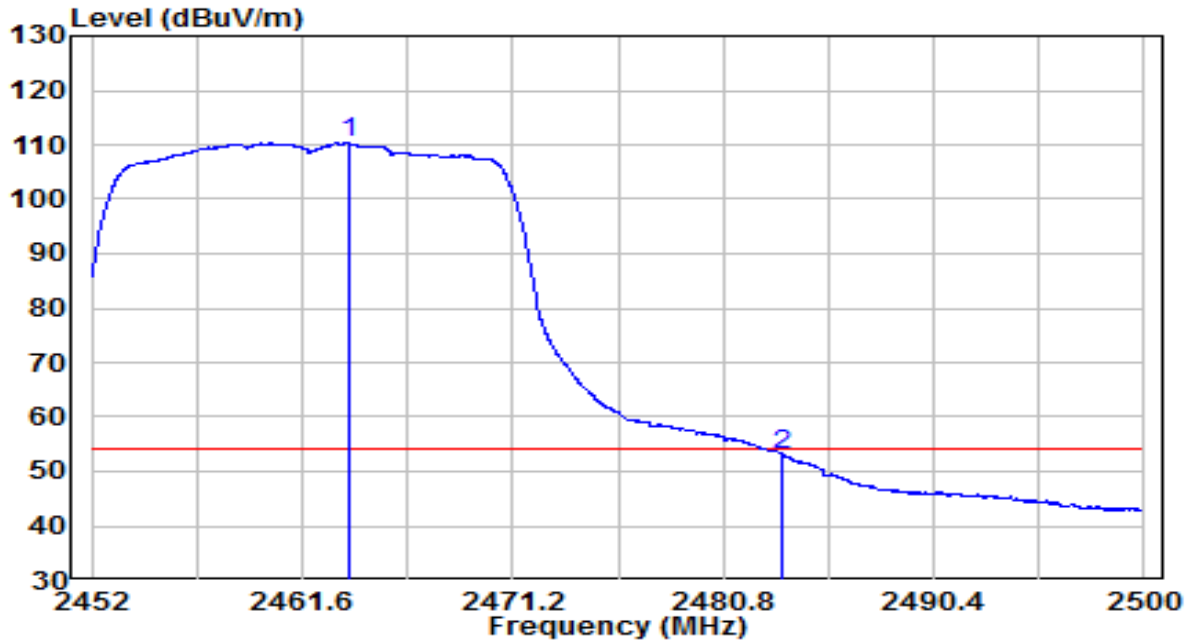


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2463.736	77.76	32.53	110.29	N/A	N/A	Average
2	2483.500	20.56	32.61	53.17	-0.83	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2452MHz	Test Voltage	By PoE

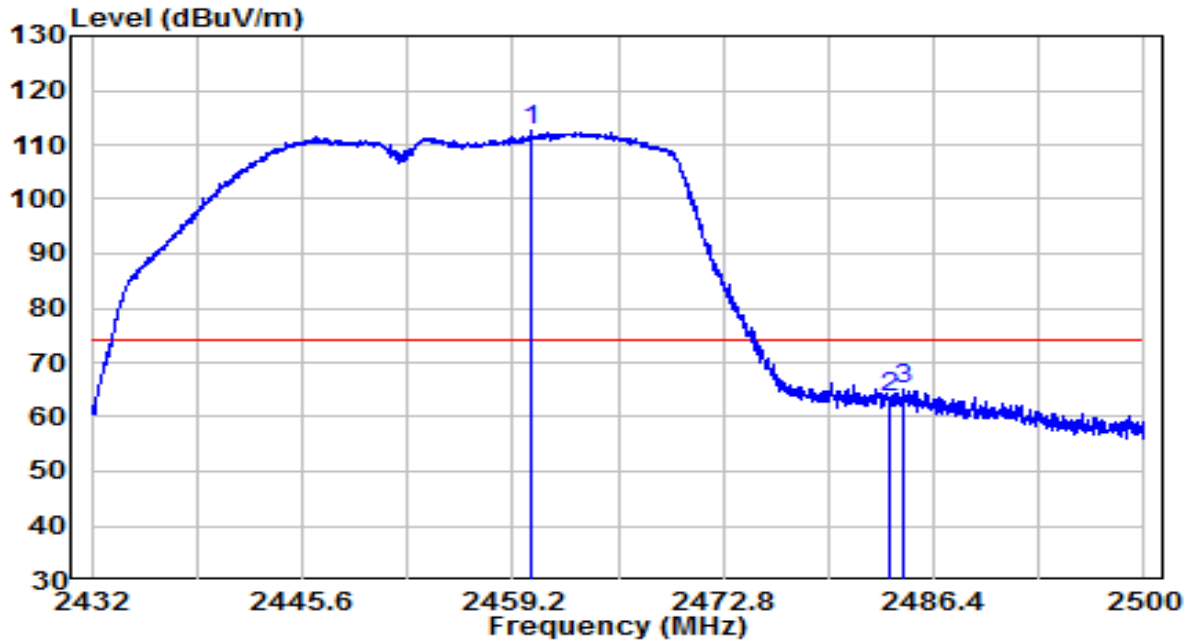


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2460.390	80.01	32.51	112.53	N/A	N/A	Peak
2	2483.500	31.09	32.61	63.70	-10.30	74.00	Peak
3	2484.428	32.35	32.61	64.97	-9.03	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2452MHz	Test Voltage	By PoE

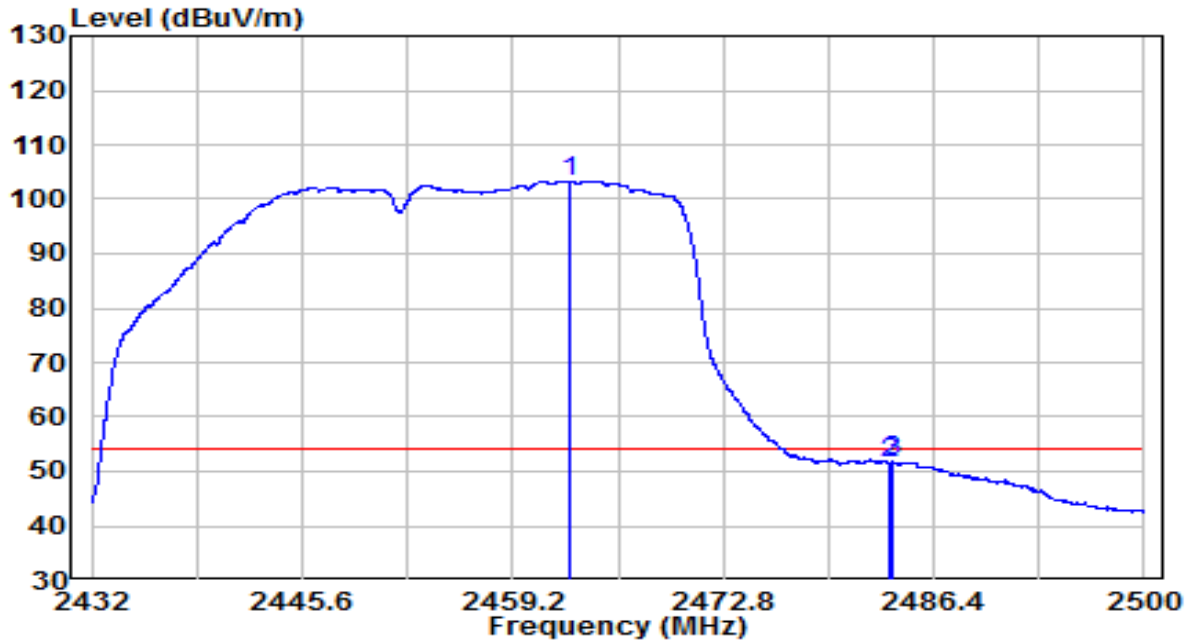


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2462.804	70.84	32.52	103.36	N/A	N/A	Average
2	2483.500	19.02	32.61	51.63	-2.37	54.00	Average
3	2483.748	19.11	32.61	51.72	-2.28	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2452MHz	Test Voltage	By PoE

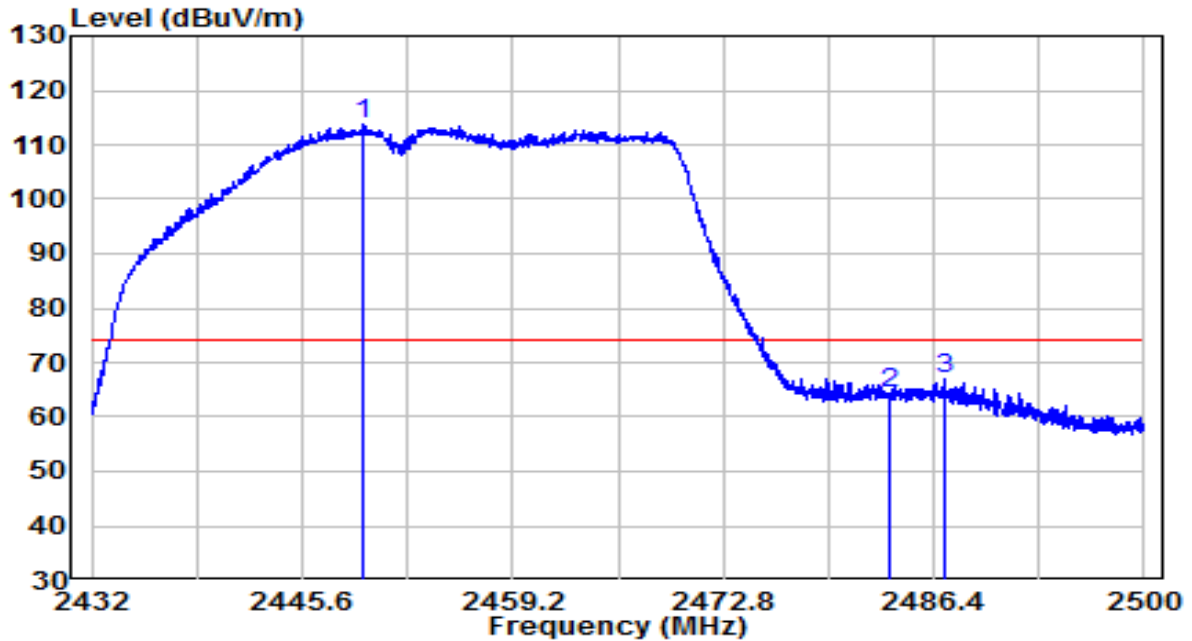


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2449.578	81.35	32.47	113.82	N/A	N/A	Peak
2	2483.500	31.87	32.61	64.48	-9.52	74.00	Peak
3	2487.114	34.30	32.63	66.93	-7.07	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at Channel 2452MHz	Test Voltage	By PoE

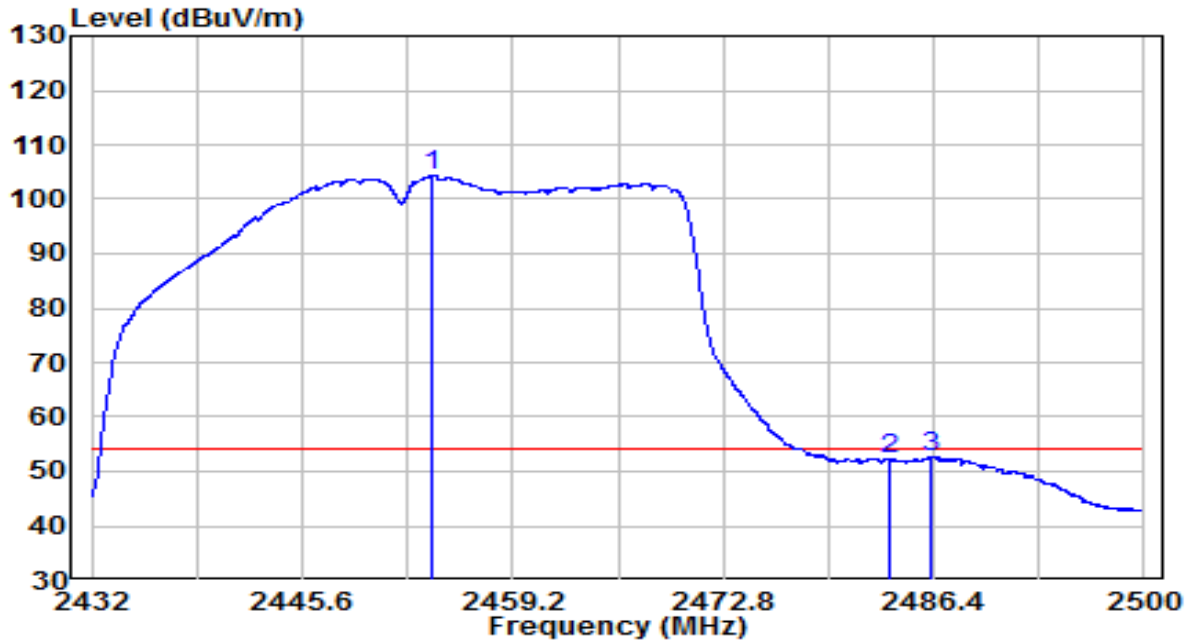


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	71.82	32.49	104.31	N/A	N/A	Average
2		19.56	32.61	52.17	-1.83	54.00	Average
3		20.18	32.62	52.80	-1.20	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz	Test Voltage	By PoE

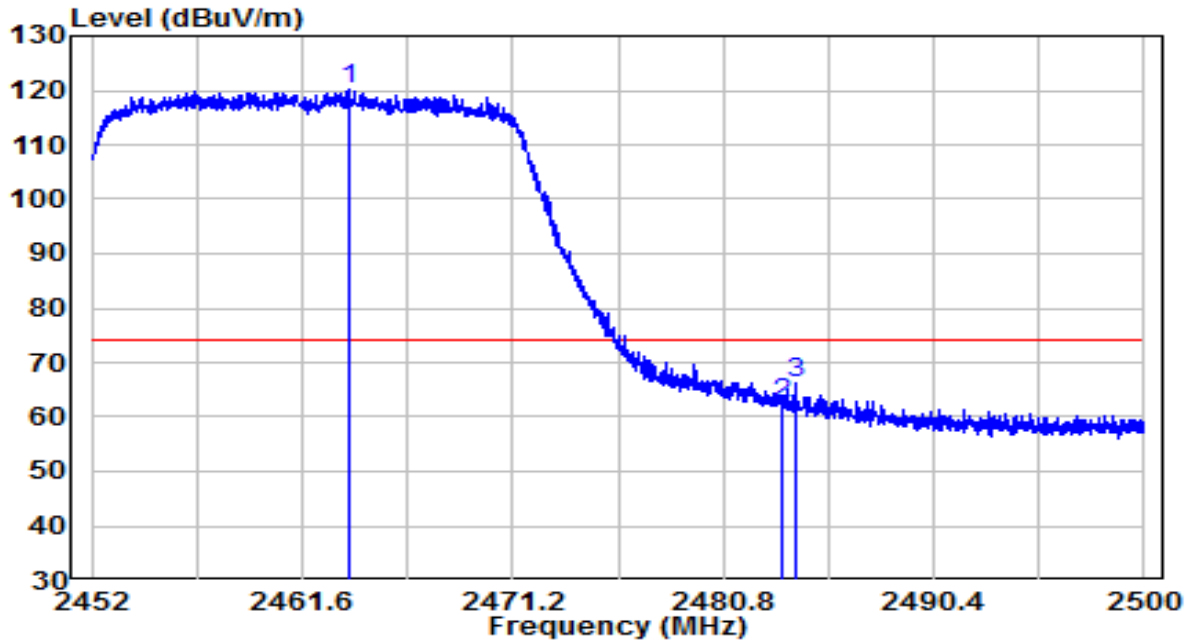


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2463.760	87.77	32.53	120.30	N/A	N/A	Peak
2	2483.500	29.83	32.61	62.44	-11.56	74.00	Peak
3	2484.112	33.49	32.61	66.10	-7.90	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz	Test Voltage	By PoE

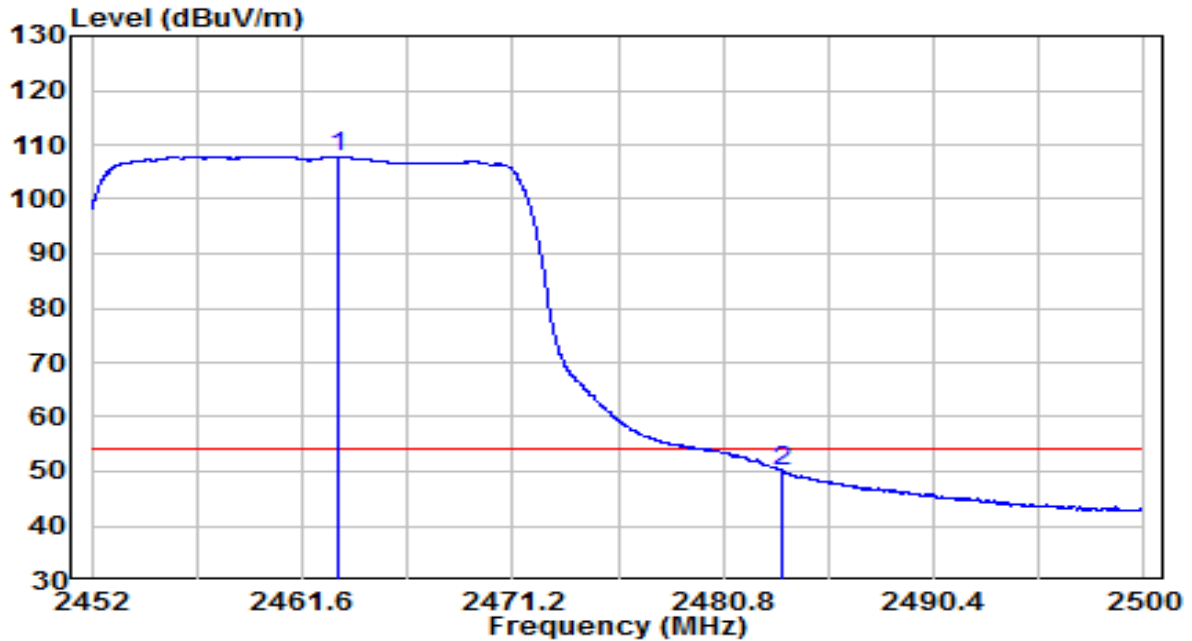


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2463.184	75.40	32.53	107.92	N/A	N/A	Average
2	2483.500	17.55	32.61	50.16	-3.84	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz	Test Voltage	By PoE

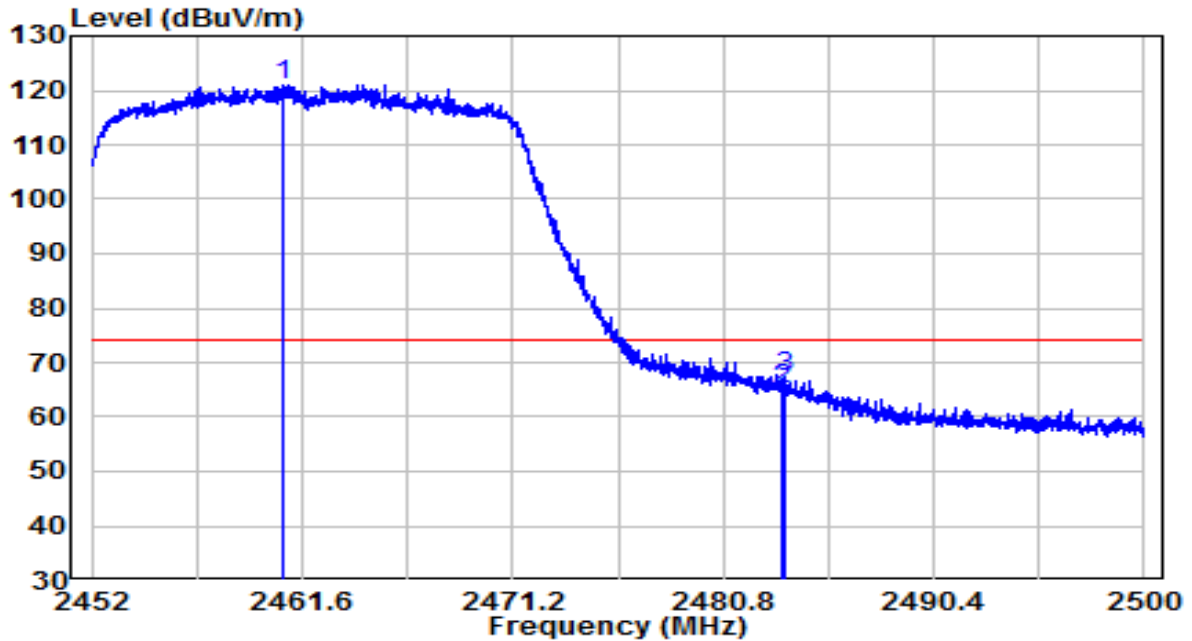


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	88.52	32.52	121.03	N/A	N/A	Peak
2		32.61	32.61	65.22	-8.78	74.00	Peak
3		34.93	32.61	67.54	-6.46	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462MHz	Test Voltage	By PoE

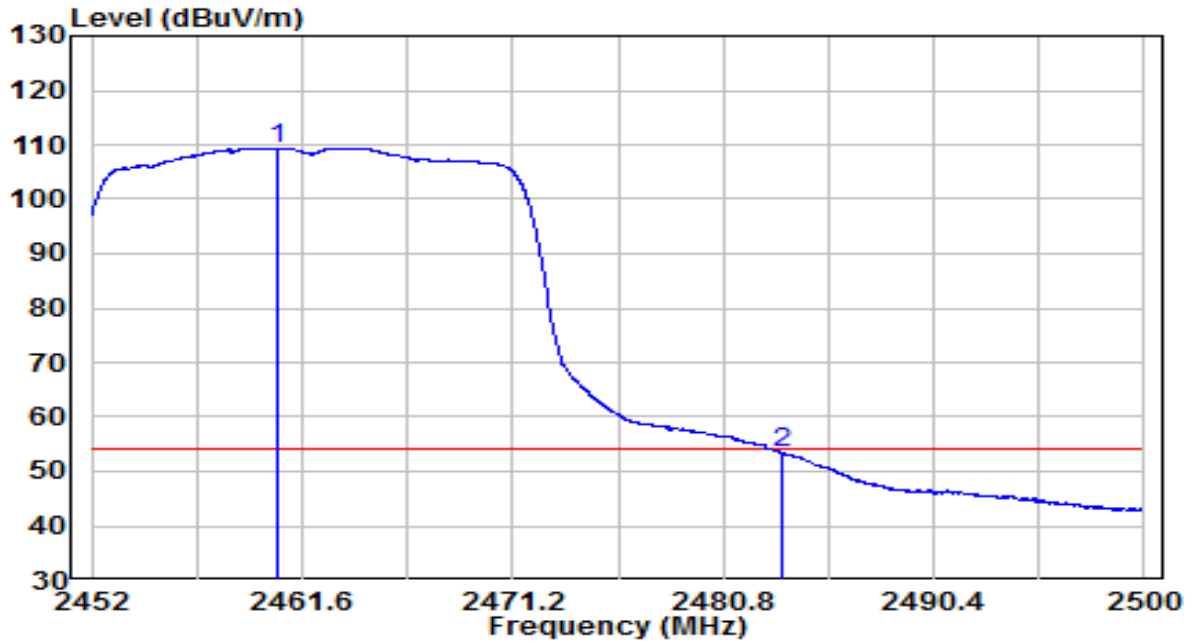


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	76.91	32.51	109.43	N/A	N/A	Average
2		20.86	32.61	53.47	-0.53	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	By PoE

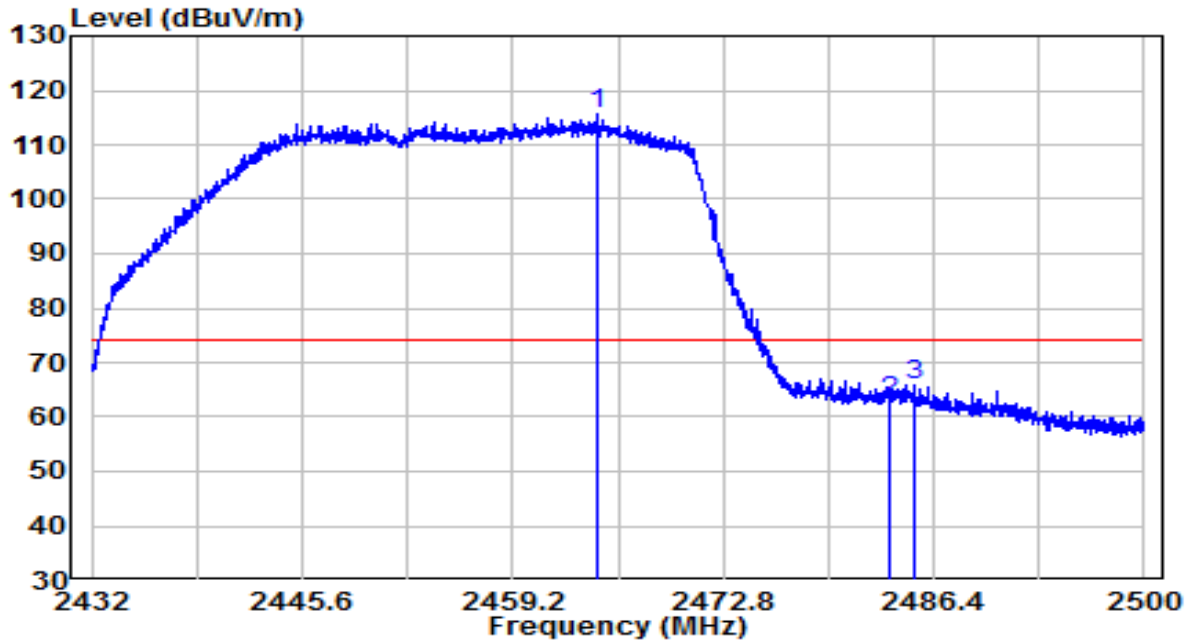


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2464.674	82.99	32.53	115.52	N/A	N/A	Peak
2		2483.500	30.30	32.61	62.91	-11.09	74.00	Peak
3		2485.074	33.12	32.62	65.74	-8.26	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	By PoE

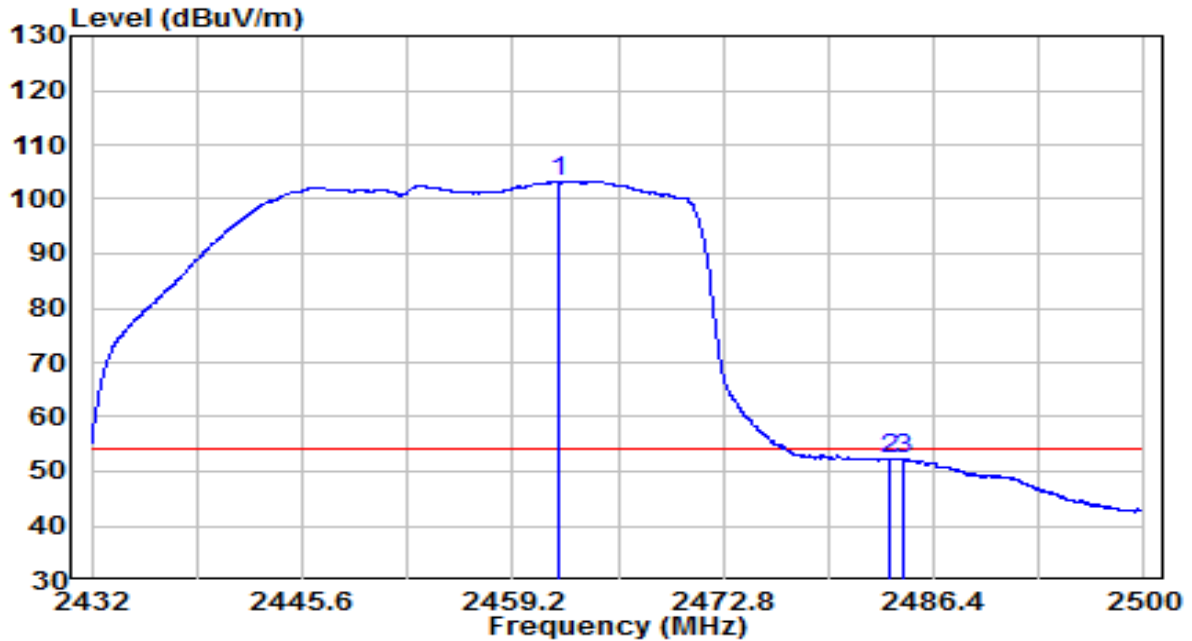


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2462.090	70.69	32.52	103.21	N/A	N/A	Average
2	2483.500	19.63	32.61	52.24	-1.76	54.00	Average
3	2484.360	19.67	32.61	52.29	-1.71	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	By PoE

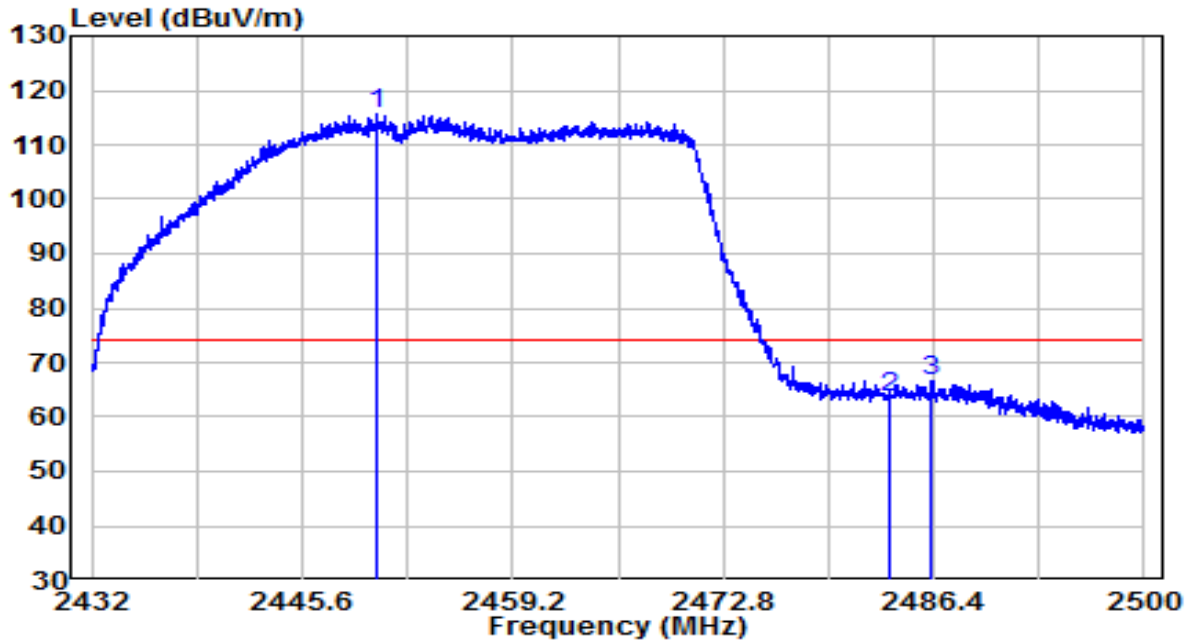


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2450.496	83.23	32.47	115.71	N/A	N/A	Peak
2		2483.500	30.86	32.61	63.47	-10.53	74.00	Peak
3		2486.230	33.98	32.62	66.60	-7.40	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-22
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	26.2°C/48%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	By PoE

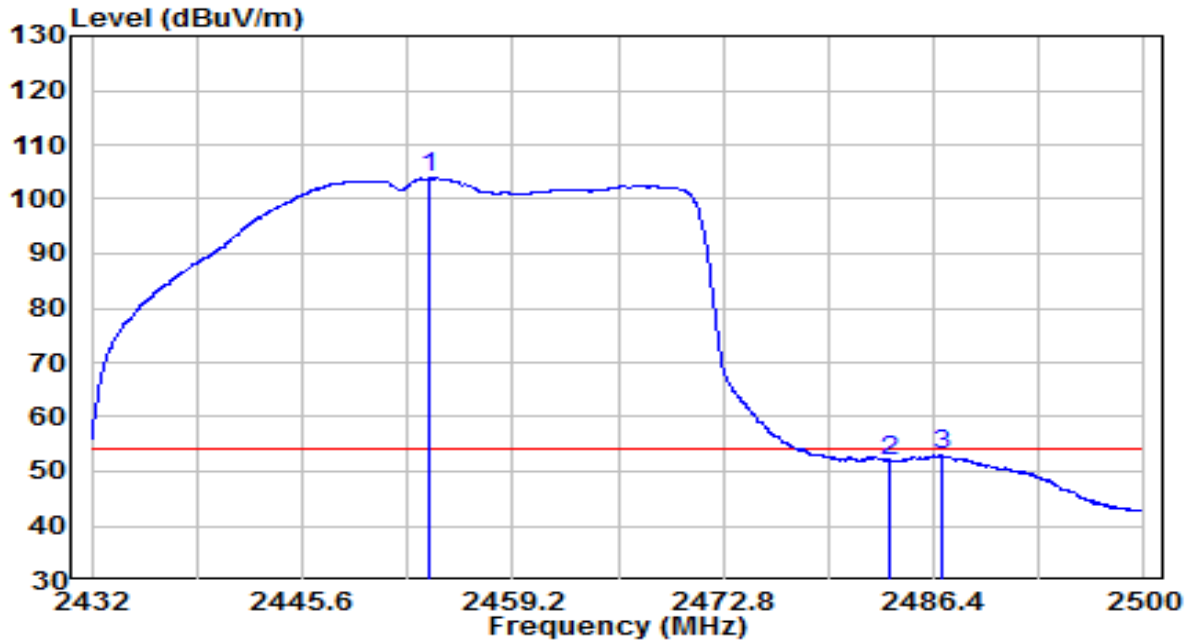


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	71.33	32.49	103.82	N/A	N/A	Average
2		19.25	32.61	51.86	-2.14	54.00	Average
3		20.28	32.62	52.90	-1.10	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

**APEX0584 Filter 1# & ANT Model No.: ANT-2x2-2314**

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at channel 2412MHz	Test Voltage	By PoE

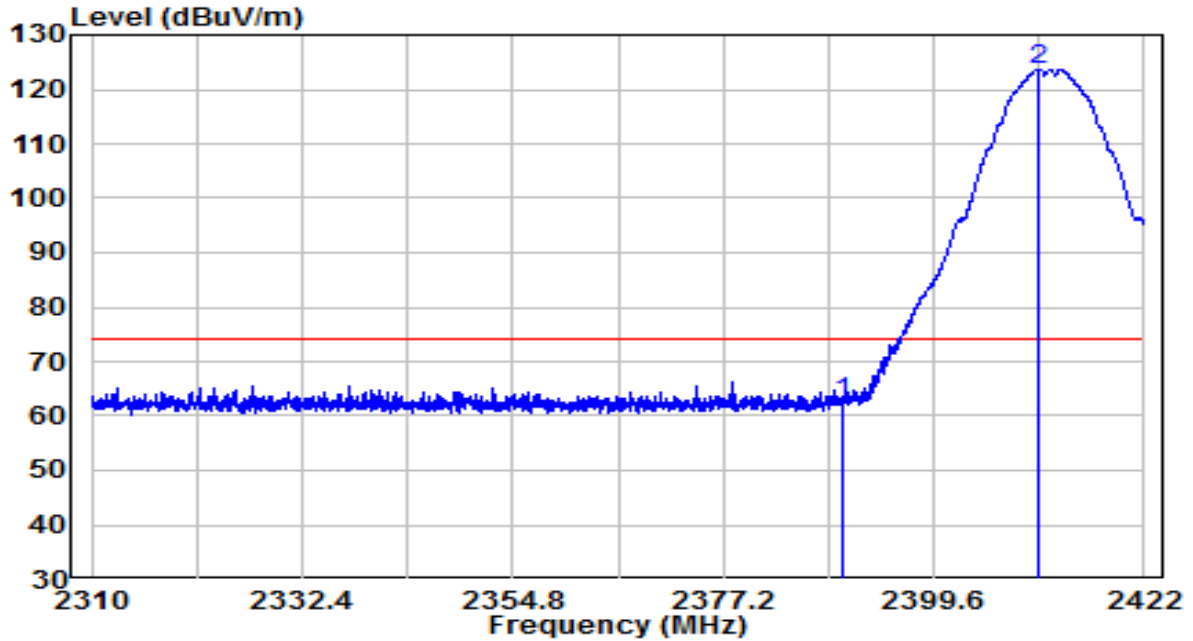


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	30.09	32.22	62.31	-11.69	74.00	Peak
2	* 2410.856	91.43	32.31	123.74	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at channel 2412MHz	Test Voltage	By PoE

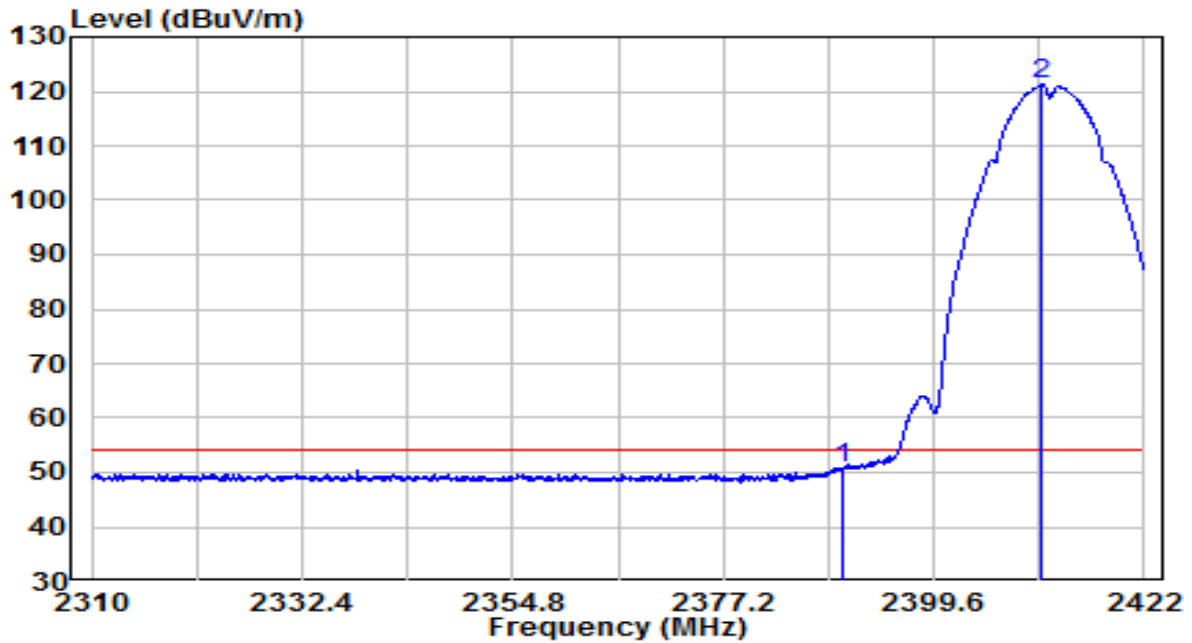


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	18.64	32.22	50.86	-3.14	54.00	Average
2	* 2411.136	88.86	32.31	121.16	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at channel 2412MHz	Test Voltage	By PoE

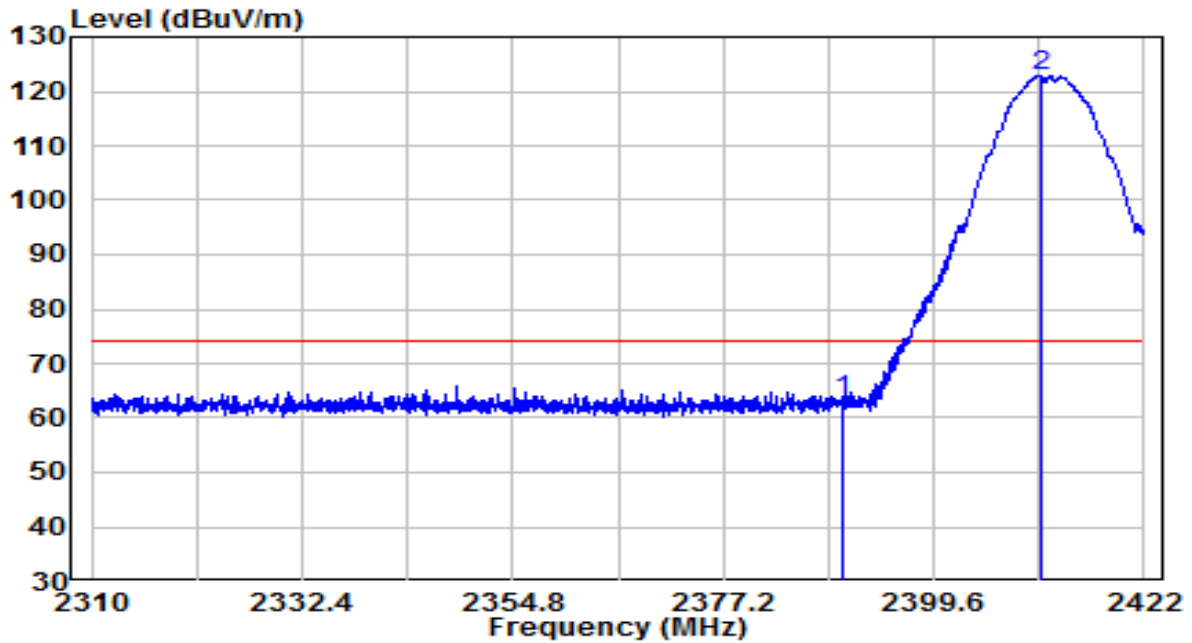


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	31.02	32.22	63.23	-10.77	74.00	Peak
2	* 2410.968	90.57	32.31	122.88	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at channel 2412MHz	Test Voltage	By PoE

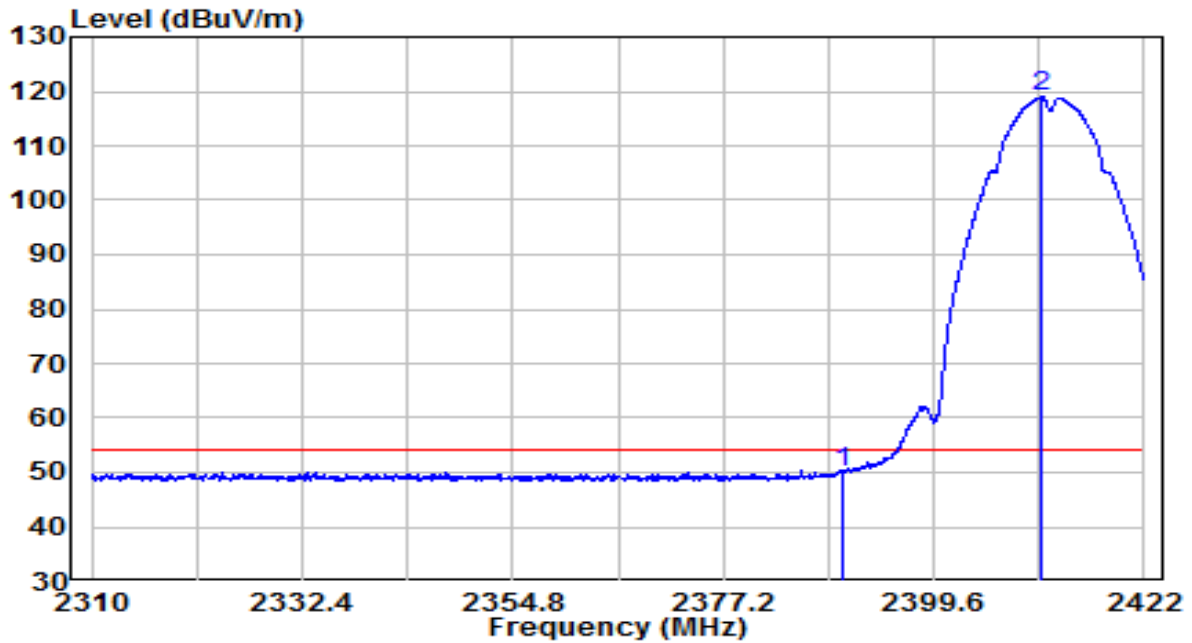


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	17.95	32.22	50.17	-3.83	54.00	Average
2	* 2411.080	86.65	32.31	118.96	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at channel 2462MHz	Test Voltage	By PoE

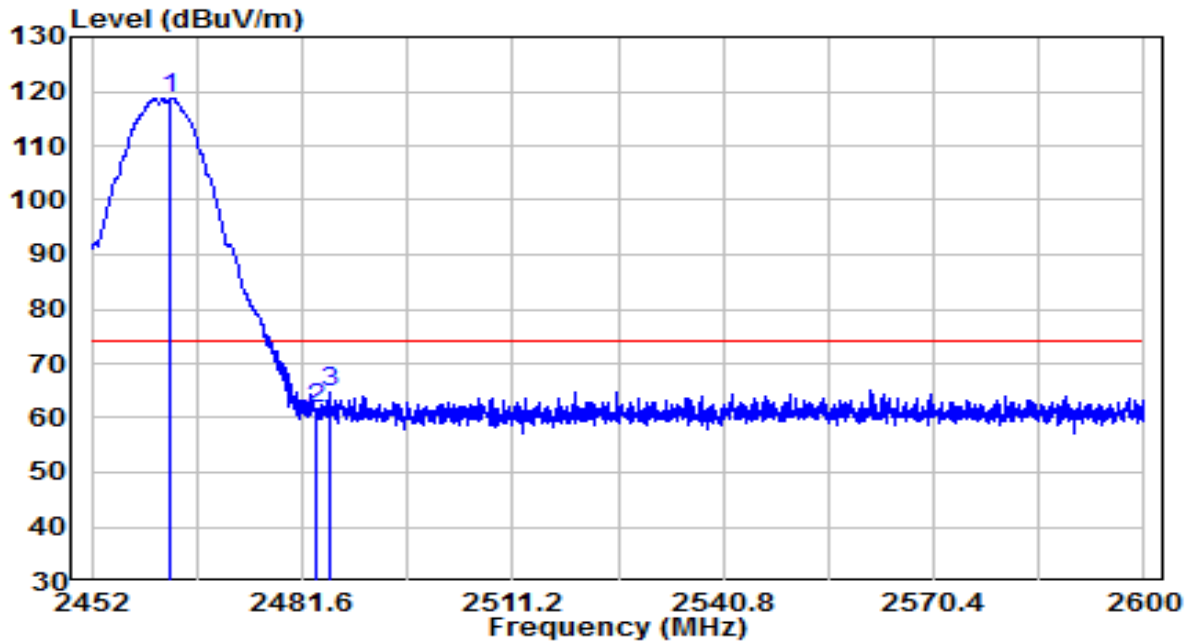


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	*	86.29	32.53	118.82	N/A	N/A	Peak
2		29.14	32.61	61.75	-12.25	74.00	Peak
3		32.06	32.62	64.67	-9.33	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at channel 2462MHz	Test Voltage	By PoE

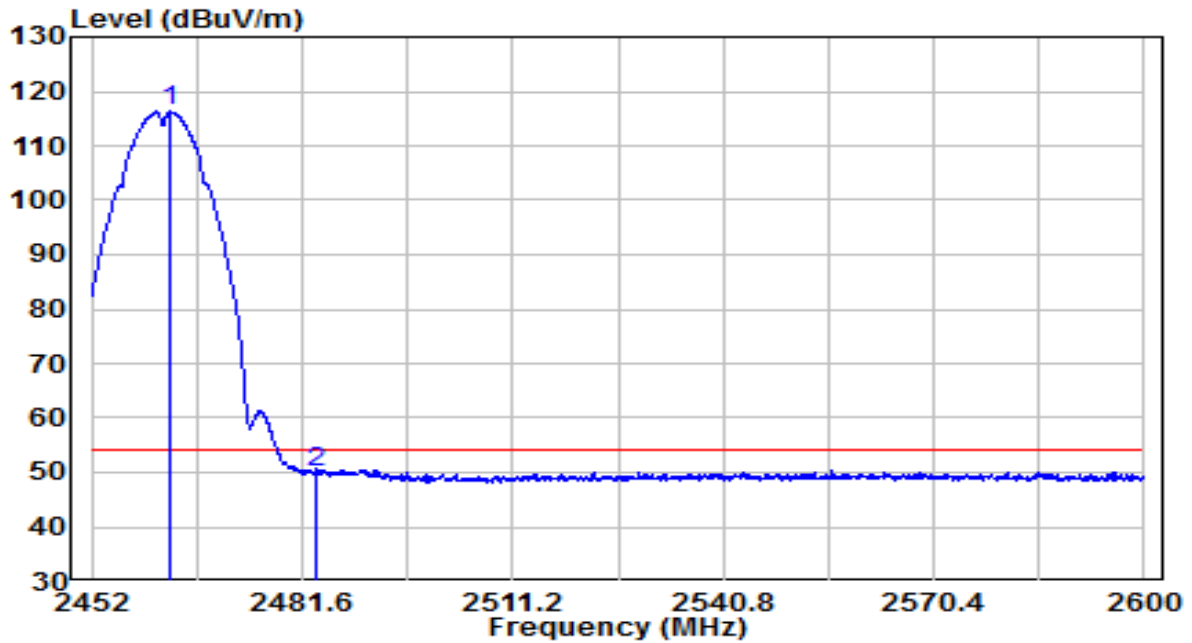


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2462.878	83.78	32.52	116.30	N/A	N/A	Average
2		2483.500	17.54	32.61	50.15	-3.85	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at channel 2462MHz	Test Voltage	By PoE

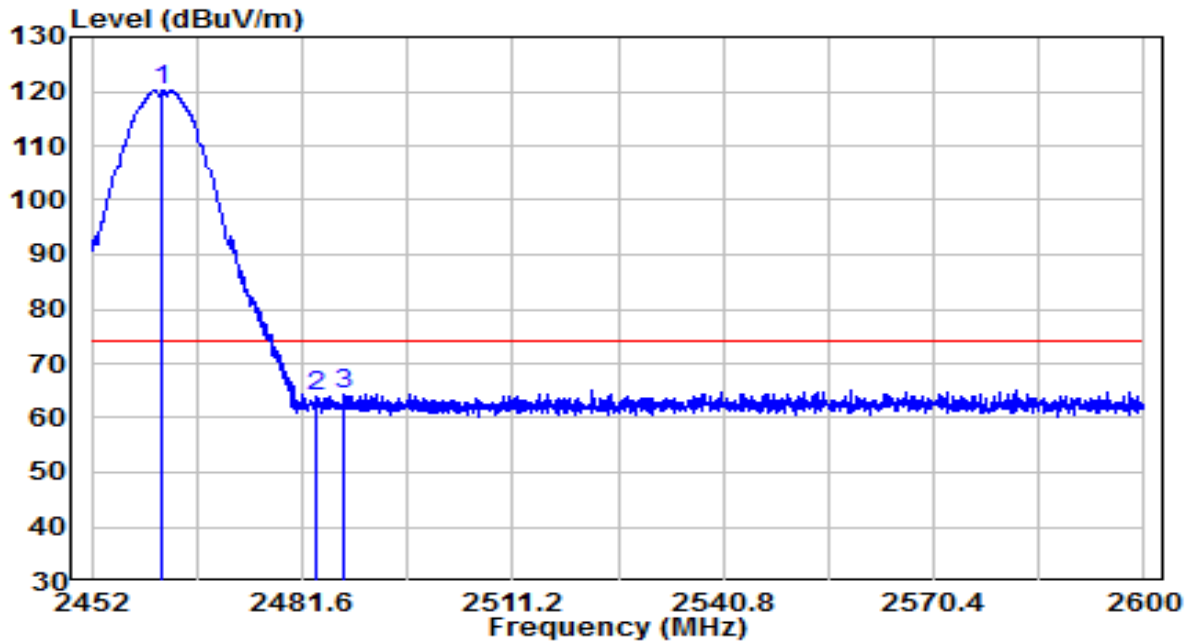


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	87.73	32.52	120.25	N/A	N/A	Peak
2		31.17	32.61	63.78	-10.22	74.00	Peak
3		31.70	32.63	64.33	-9.67	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at channel 2462MHz	Test Voltage	By PoE

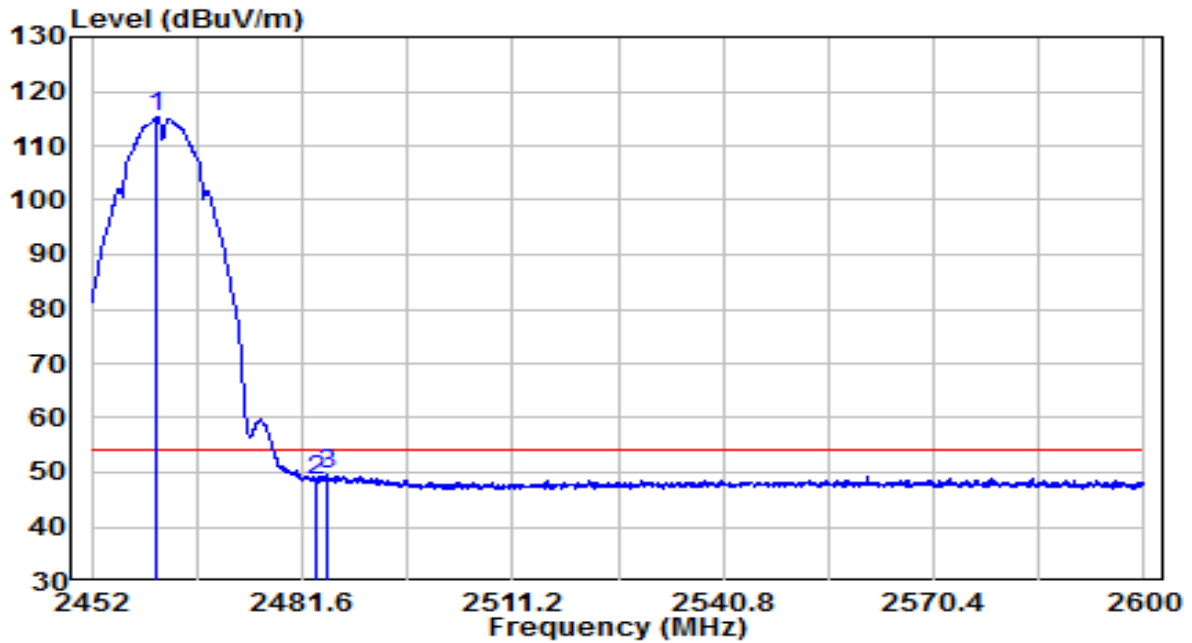


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	82.71	32.52	115.23	N/A	N/A	Average
2		15.95	32.61	48.56	-5.44	54.00	Average
3		17.05	32.62	49.66	-4.34	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at channel 2412MHz	Test Voltage	By PoE

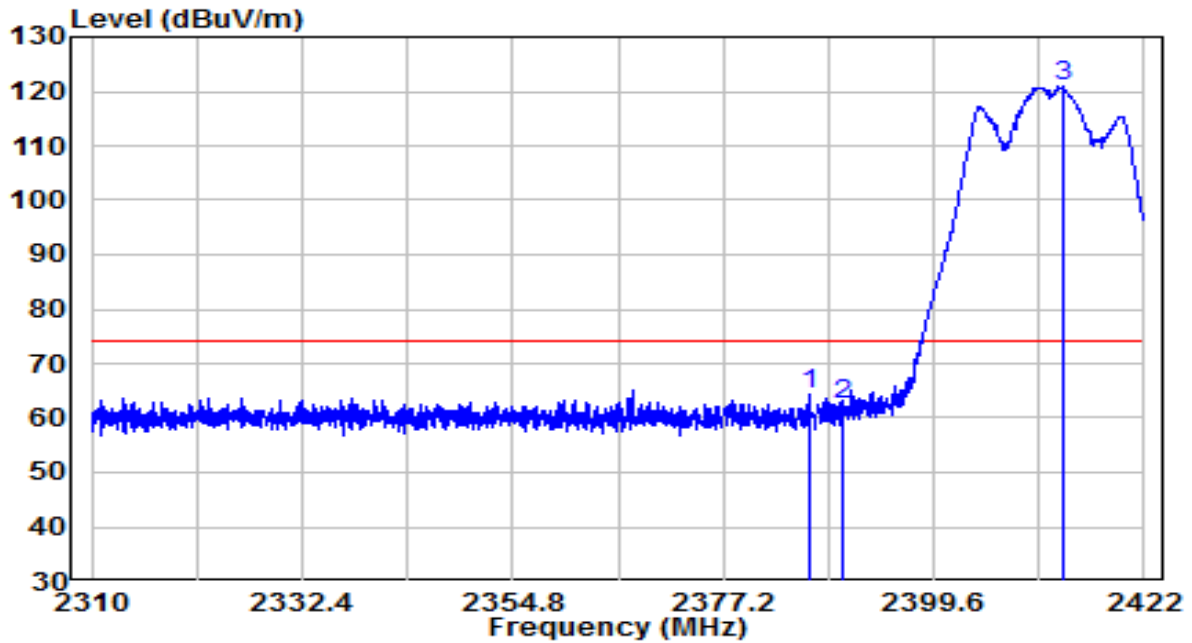


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2386.272	32.00	32.20	64.20	-9.80	74.00	Peak
2	2390.000	30.07	32.22	62.28	-11.72	74.00	Peak
3	* 2413.488	88.75	32.32	121.06	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at channel 2412MHz	Test Voltage	By PoE

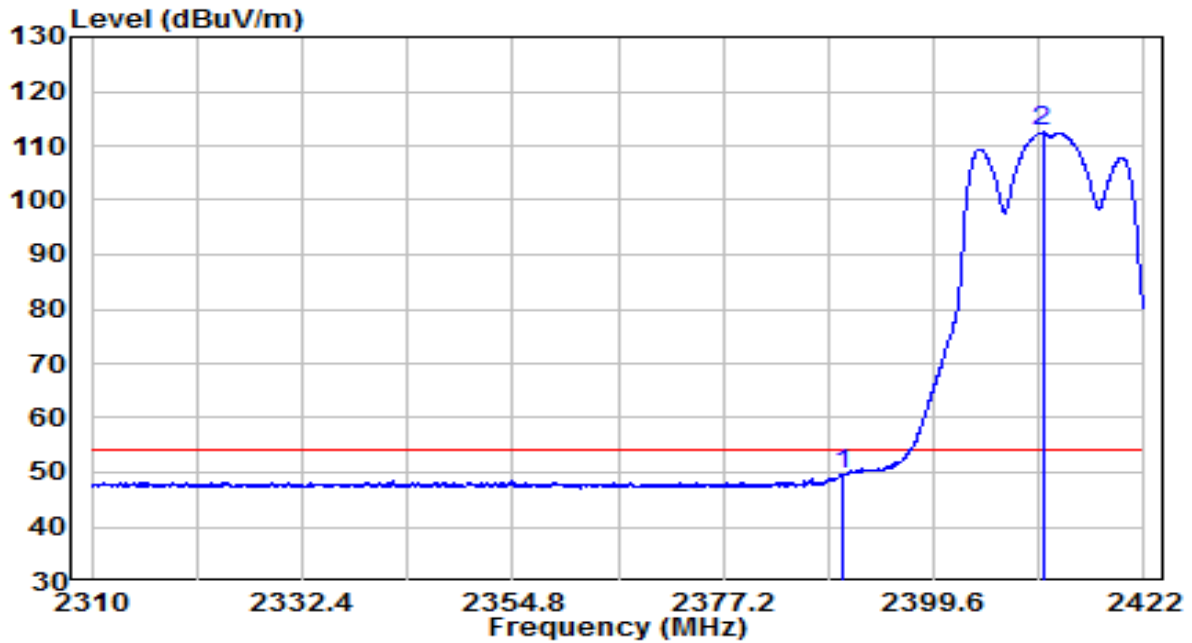


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	17.37	32.22	49.59	-4.41	54.00	Average
2	* 2411.192	80.15	32.31	112.46	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at channel 2412MHz	Test Voltage	By PoE

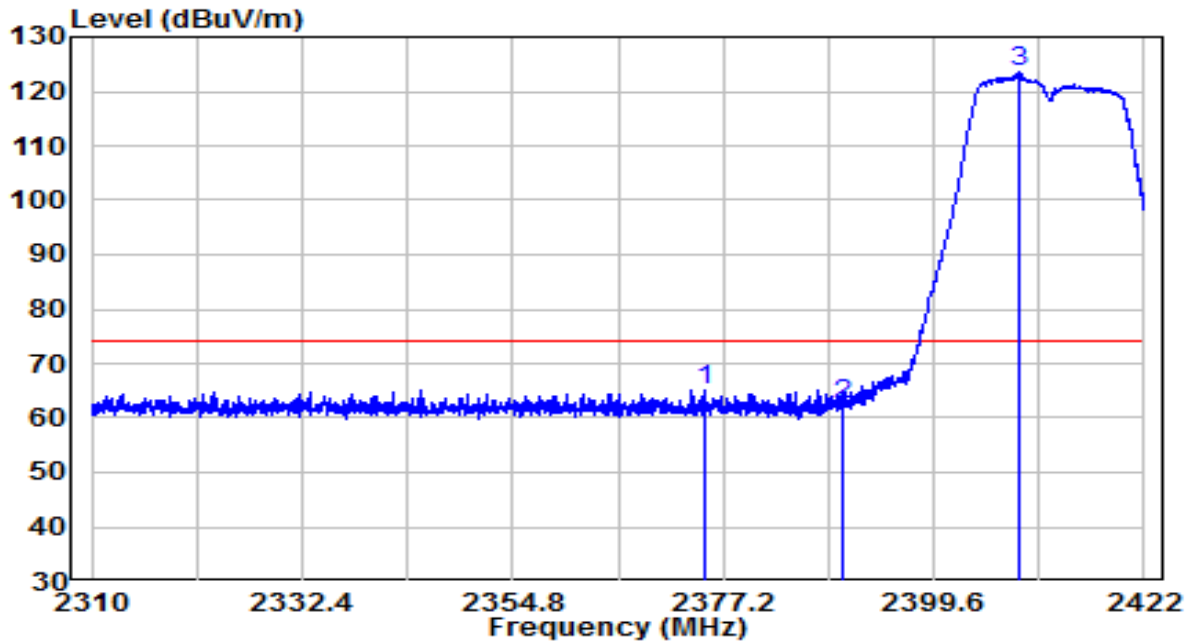


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2375.128	32.98	32.16	65.14	-8.86	74.00	Peak
2	2390.000	30.33	32.22	62.55	-11.45	74.00	Peak
3	* 2408.728	91.30	32.30	123.60	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at channel 2412MHz	Test Voltage	By PoE

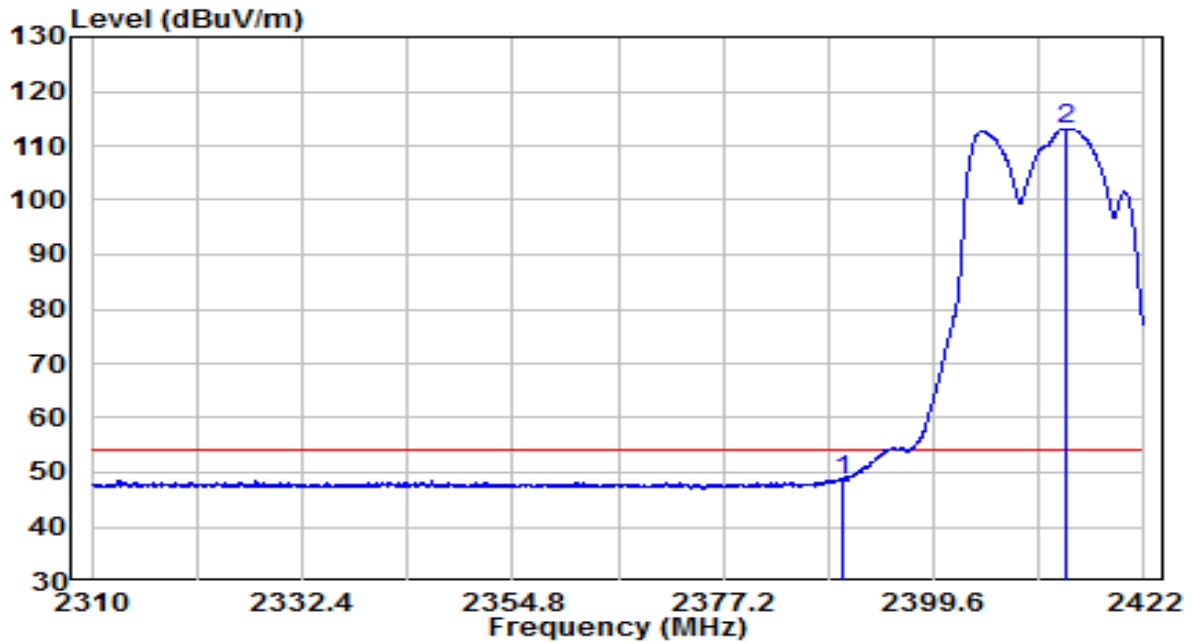


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	16.18	32.22	48.40	-5.60	54.00	Average
2	* 2413.712	80.88	32.32	113.20	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2462MHz	Test Voltage	By PoE

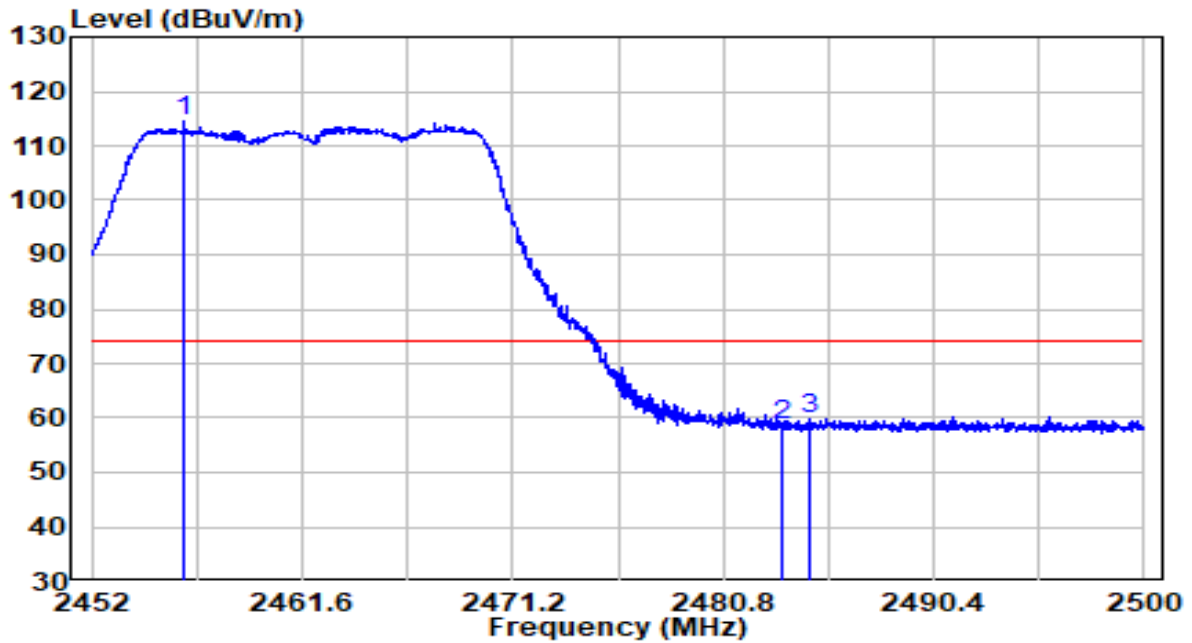


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2456.200	81.92	32.50	114.41	N/A	N/A	Peak
2	2483.488	26.12	32.61	58.73	-15.27	74.00	Peak
3	2484.736	27.14	32.62	59.75	-14.25	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2462MHz	Test Voltage	By PoE

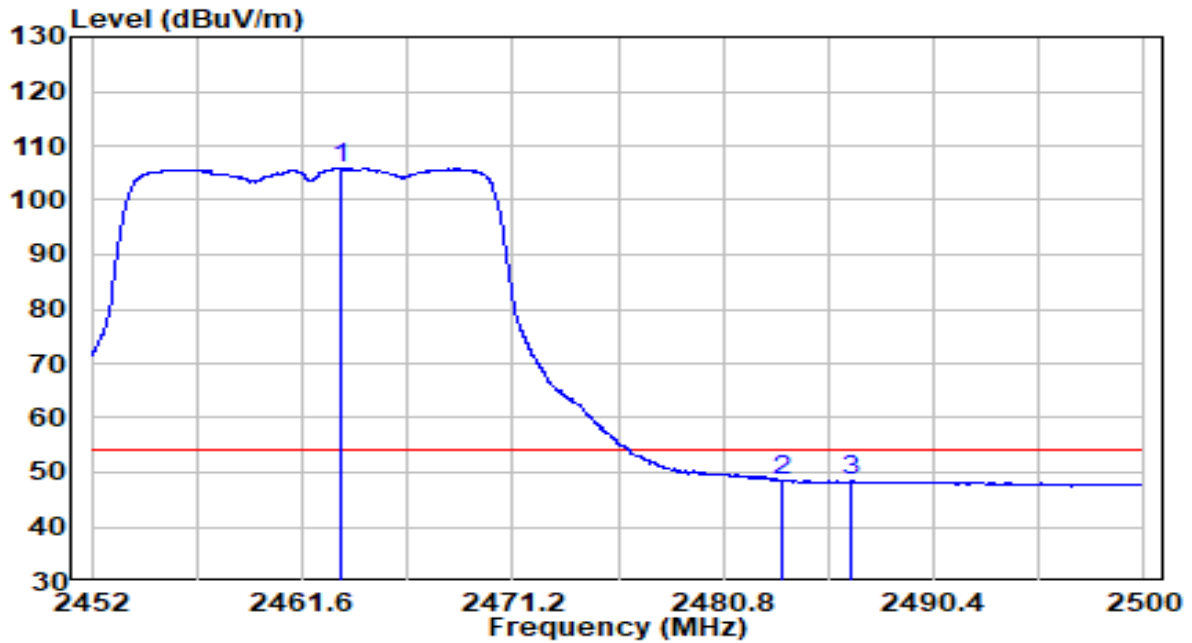


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	73.34	32.53	105.87	N/A	N/A	Average
2		15.84	32.61	48.45	-5.55	54.00	Average
3		15.80	32.62	48.42	-5.58	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2462MHz	Test Voltage	By PoE

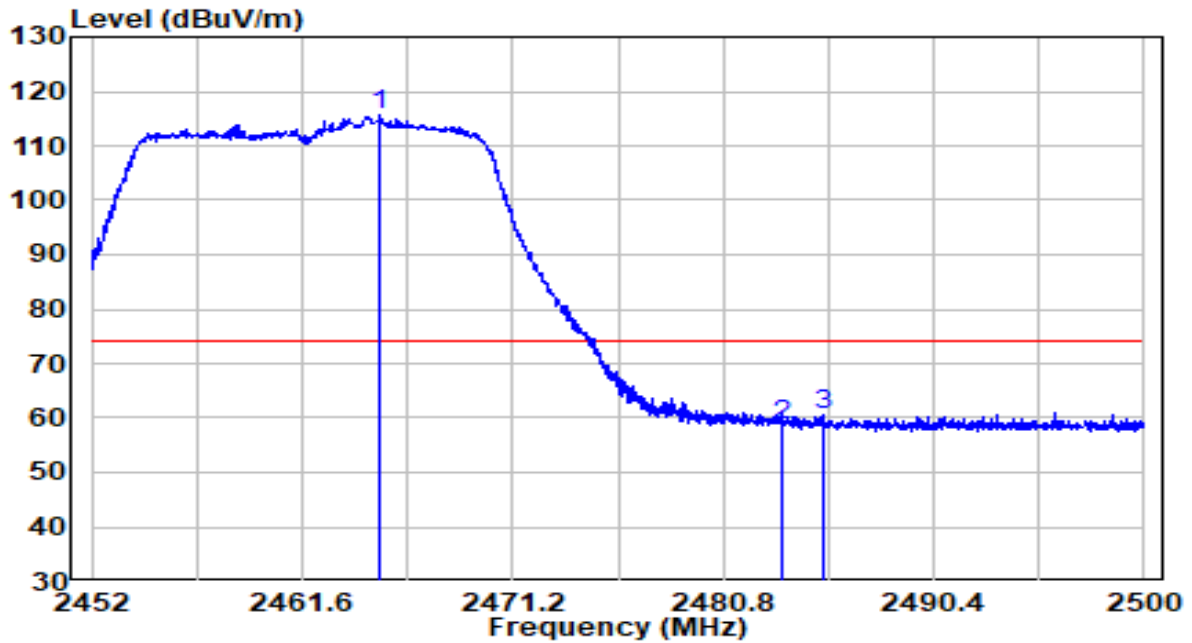


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2465.104	83.09	32.53	115.62	N/A	N/A	Peak
2		2483.488	26.13	32.61	58.74	-15.26	74.00	Peak
3		2485.312	27.77	32.62	60.39	-13.61	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2462MHz	Test Voltage	By PoE

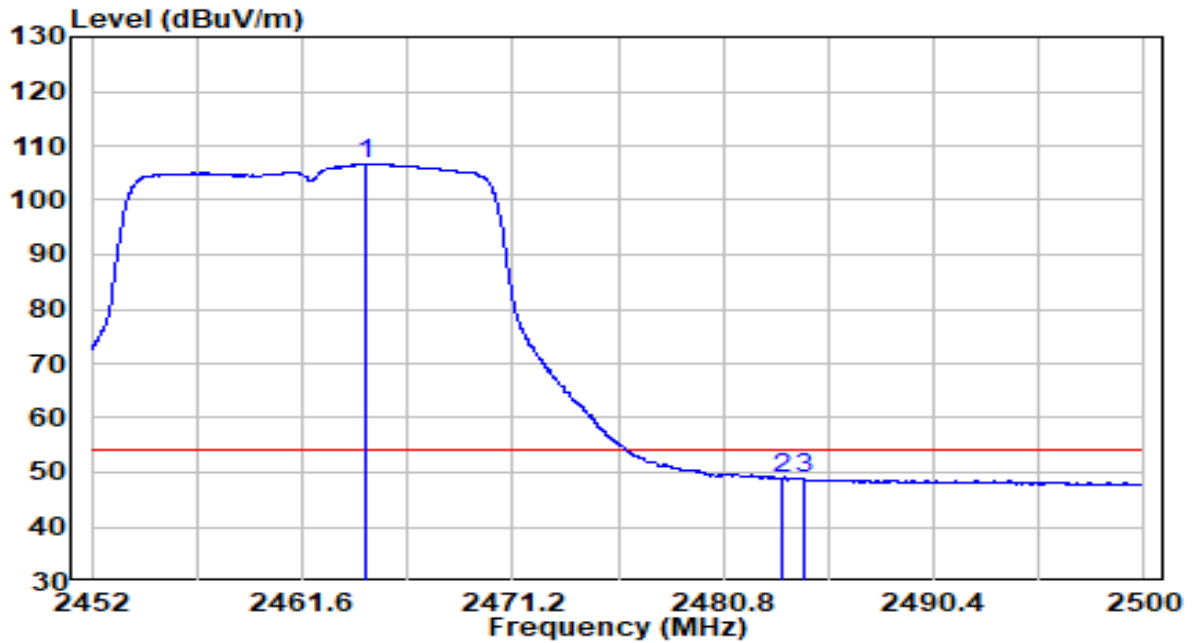


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2464.528	74.10	32.53	106.63	N/A	N/A	Average
2		2483.488	16.25	32.61	48.86	-5.14	54.00	Average
3		2484.496	16.15	32.61	48.76	-5.24	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at channel 2412MHz	Test Voltage	By PoE

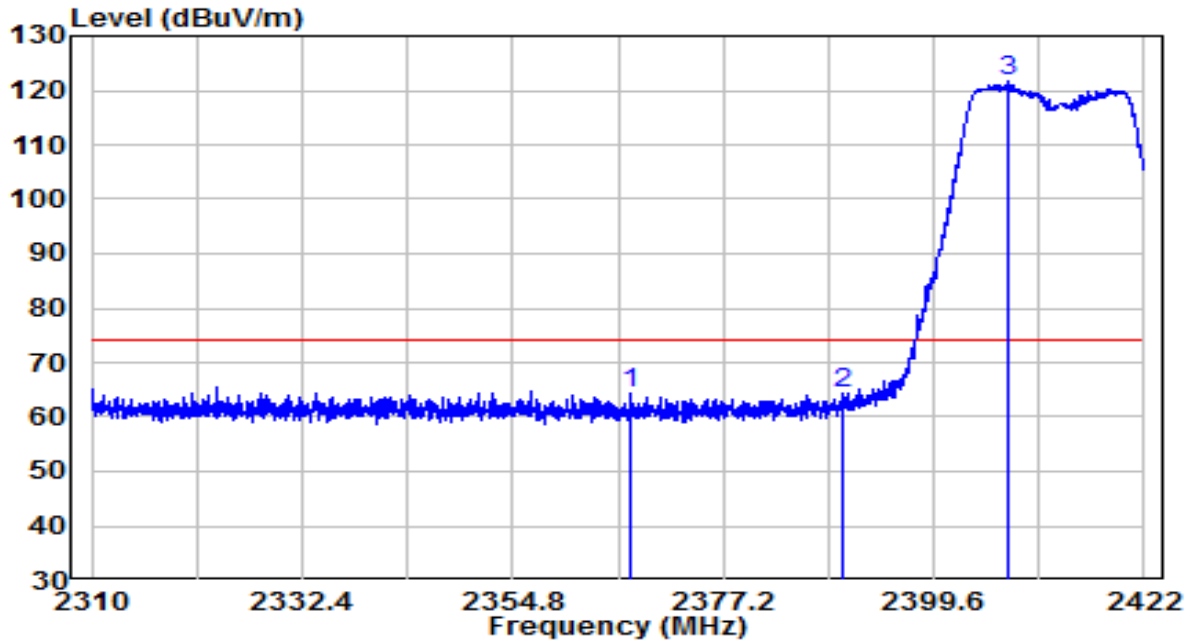


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2367.344	32.09	32.12	64.22	-9.78	74.00	Peak
2	2390.000	32.24	32.22	64.46	-9.54	74.00	Peak
3	* 2407.384	89.49	32.29	121.78	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at channel 2412MHz	Test Voltage	By PoE

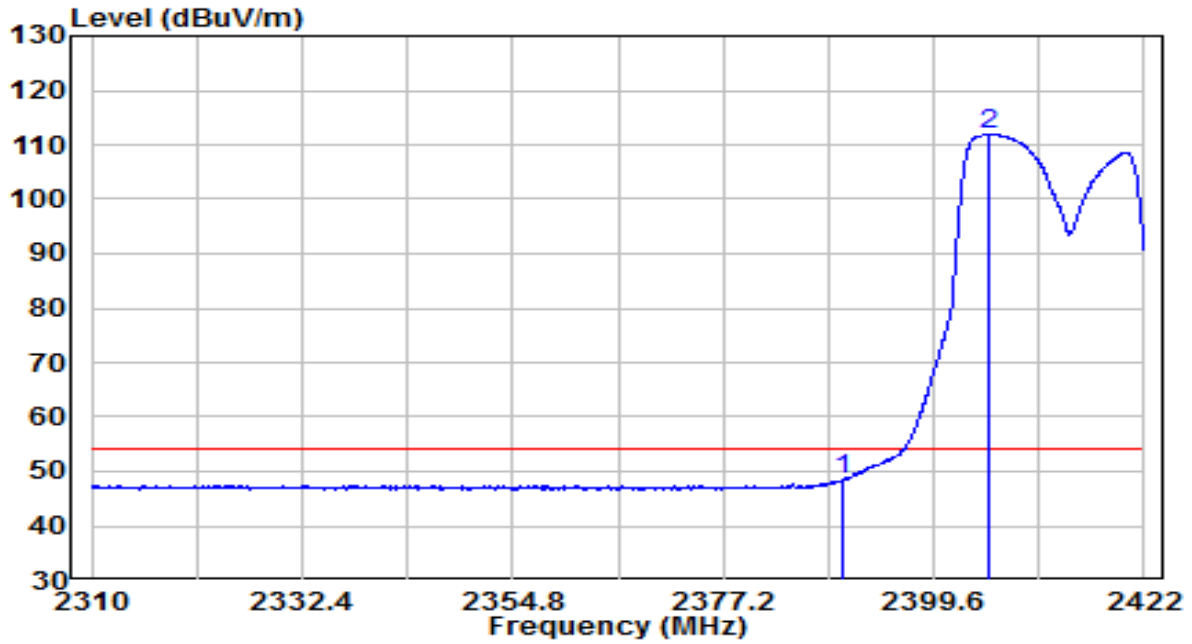


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	16.22	32.22	48.43	-5.57	54.00	Average
2	* 2405.592	79.58	32.28	111.86	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at channel 2412MHz	Test Voltage	By PoE

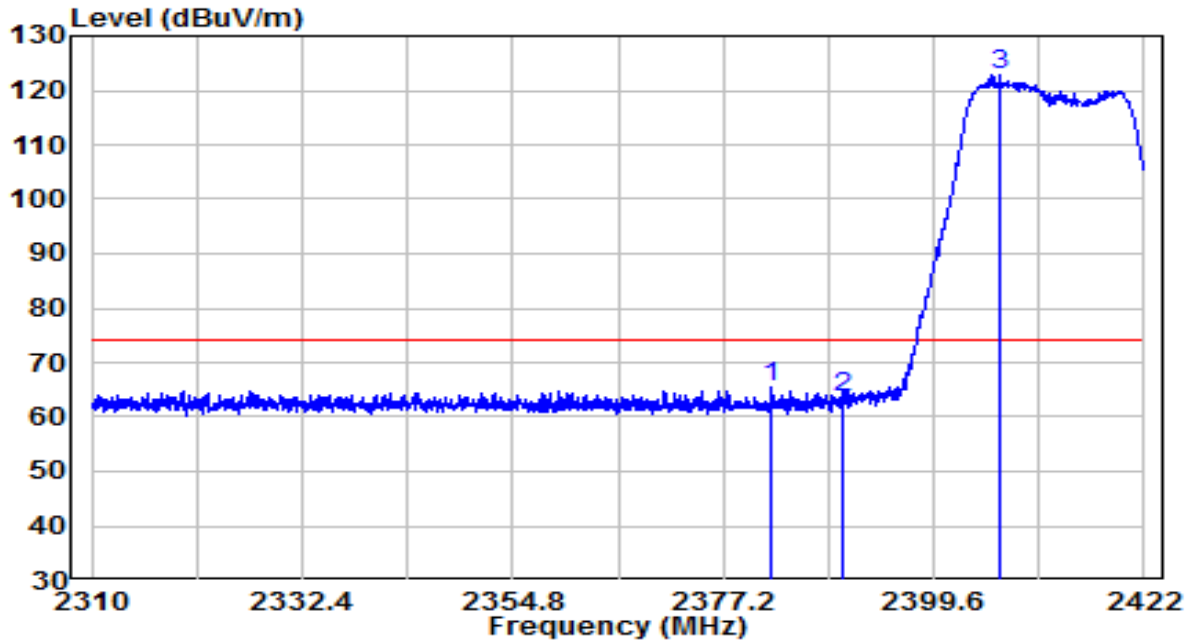


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2382.240	33.17	32.19	65.36	-8.64	74.00	Peak
2	2390.000	31.37	32.22	63.58	-10.42	74.00	Peak
3	* 2406.656	90.49	32.29	122.78	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at channel 2412MHz	Test Voltage	By PoE

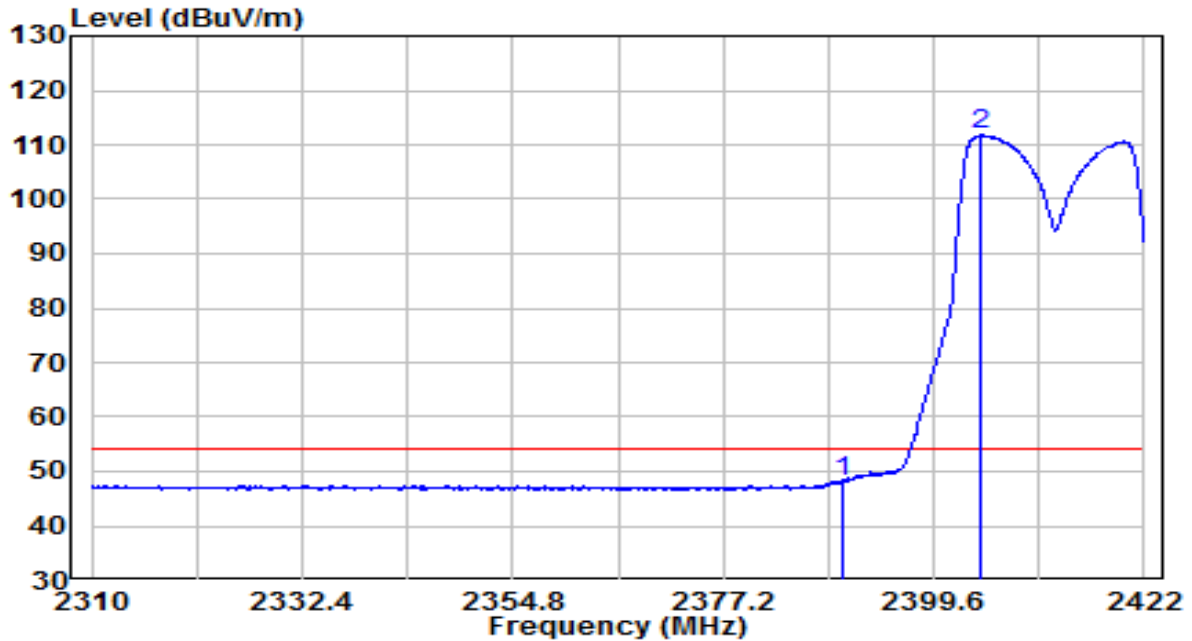


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	16.06	32.22	48.28	-5.72	54.00	Average
2	* 2404.584	79.42	32.28	111.70	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at channel 2462MHz	Test Voltage	By PoE

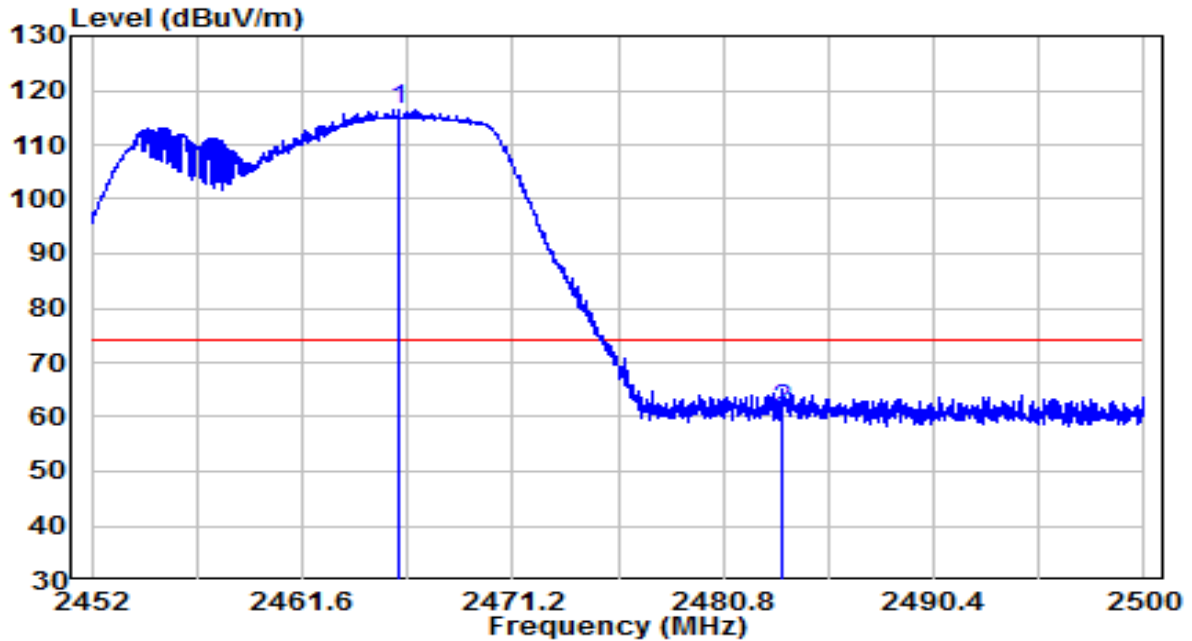


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2466.040	83.90	32.54	116.44	N/A	N/A	Peak
2		2483.500	28.56	32.61	61.17	-12.83	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at channel 2462MHz	Test Voltage	By PoE

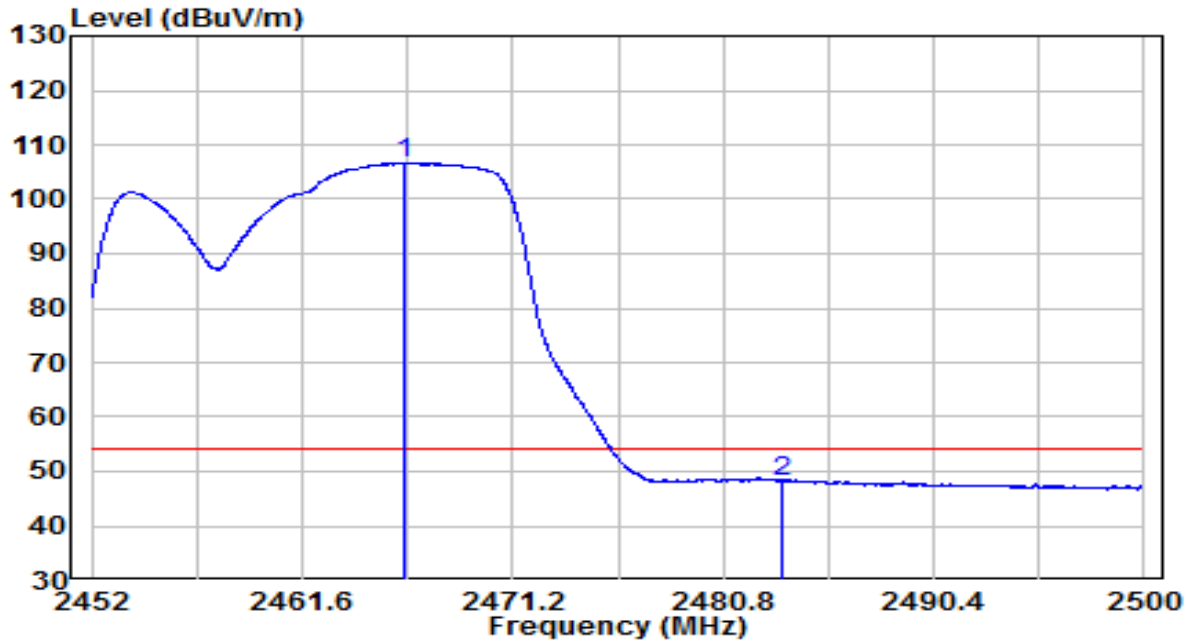


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	74.07	32.54	106.61	N/A	N/A	Average
2		15.62	32.61	48.23	-5.77	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at channel 2462MHz	Test Voltage	By PoE

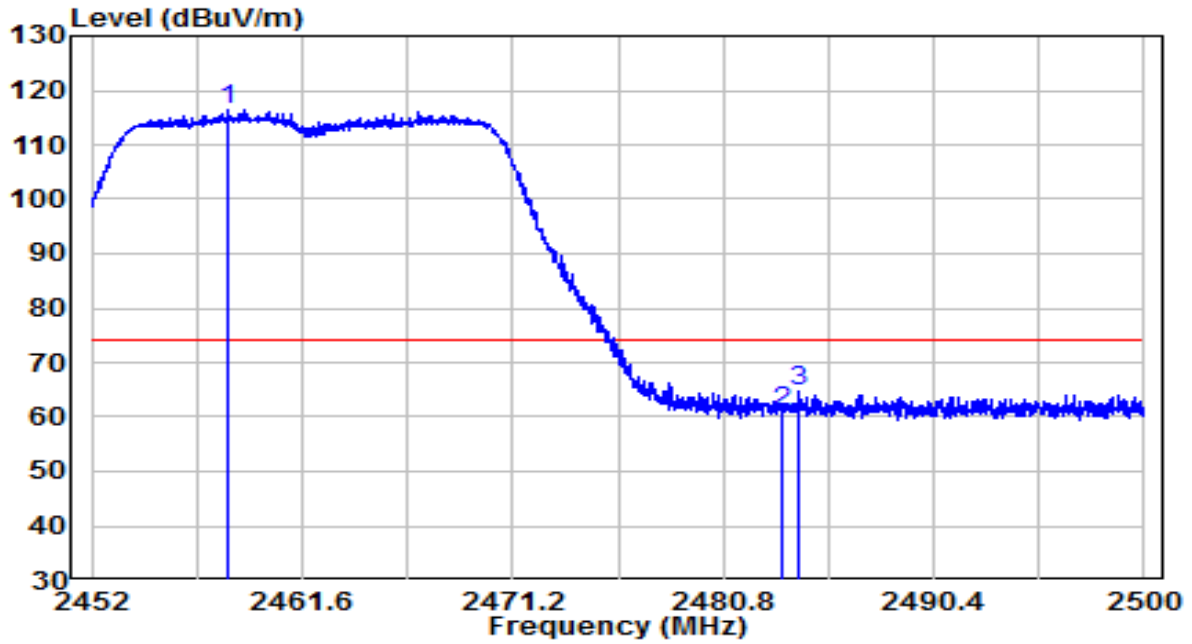


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2458.240	83.92	32.50	116.42	N/A	N/A	Peak
2		2483.500	28.49	32.61	61.10	-12.90	74.00	Peak
3		2484.208	32.29	32.61	64.90	-9.10	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT20 at channel 2462MHz	Test Voltage	By PoE

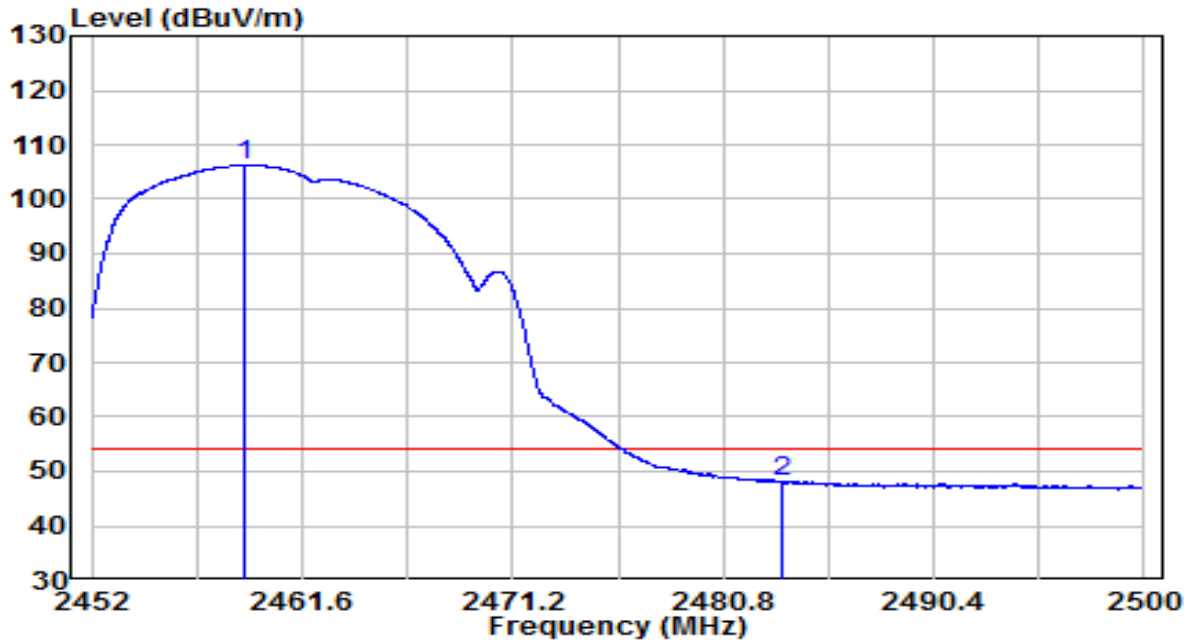


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	*	73.77	32.51	106.27	N/A	N/A	Average
2		15.42	32.61	48.03	-5.97	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at channel 2422MHz	Test Voltage	By PoE

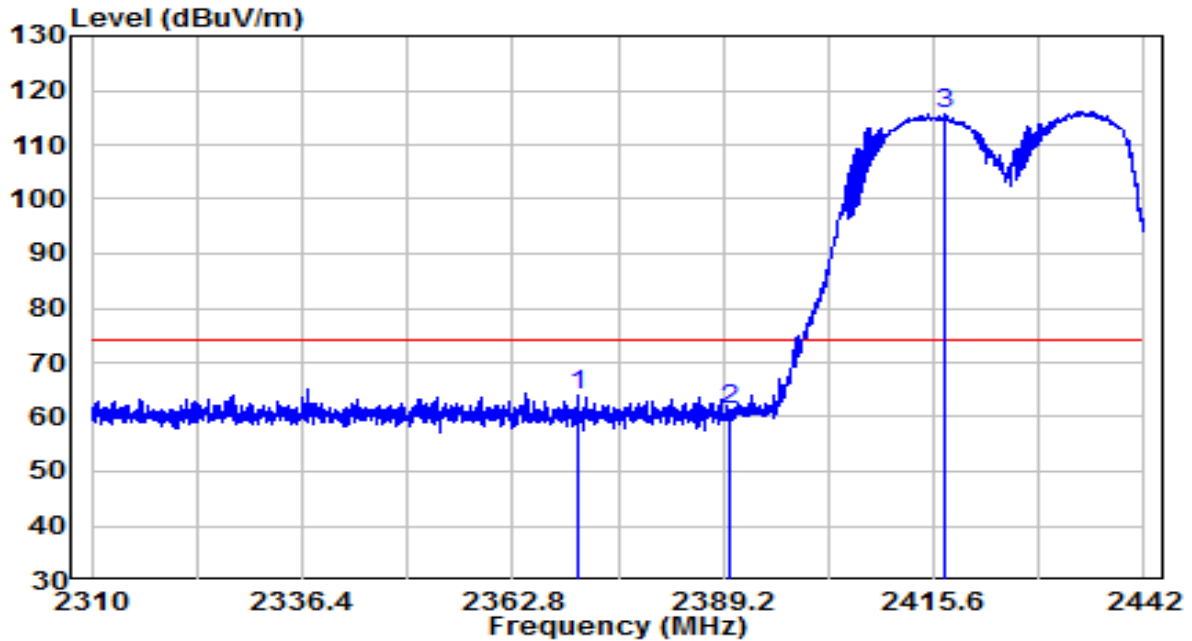


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2370.852	31.68	32.14	63.82	-10.18	74.00	Peak
2	2390.000	29.15	32.22	61.37	-12.63	74.00	Peak
3	* 2416.920	83.34	32.33	115.68	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at channel 2422MHz	Test Voltage	By PoE

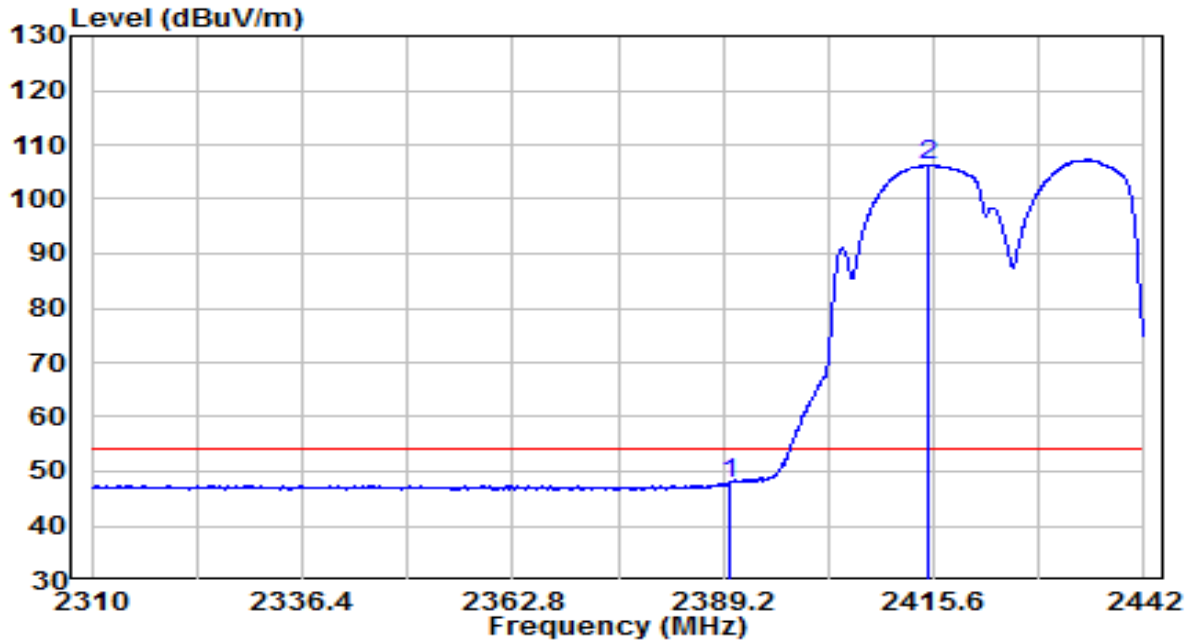


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	15.44	32.22	47.66	-6.34	54.00	Average
2	* 2415.072	73.92	32.32	106.24	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at channel 2422MHz	Test Voltage	By PoE

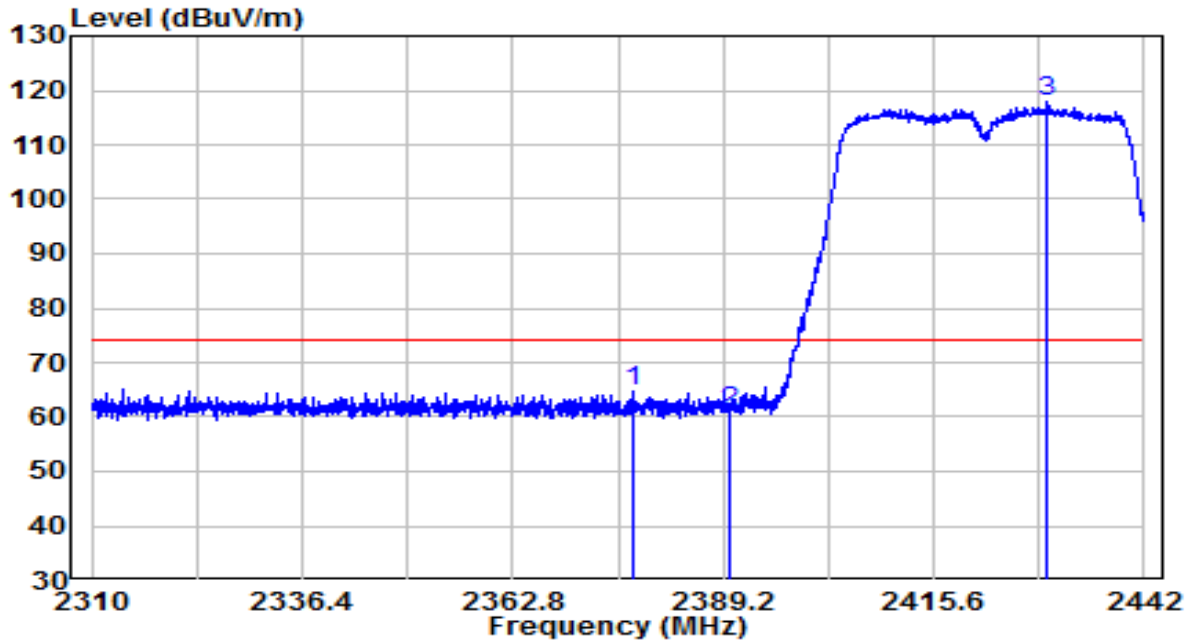


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2378.046	32.51	32.17	64.68	-9.32	74.00	Peak
2	2390.000	28.76	32.22	60.98	-13.02	74.00	Peak
3	* 2429.724	85.67	32.38	118.06	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at channel 2422MHz	Test Voltage	By PoE

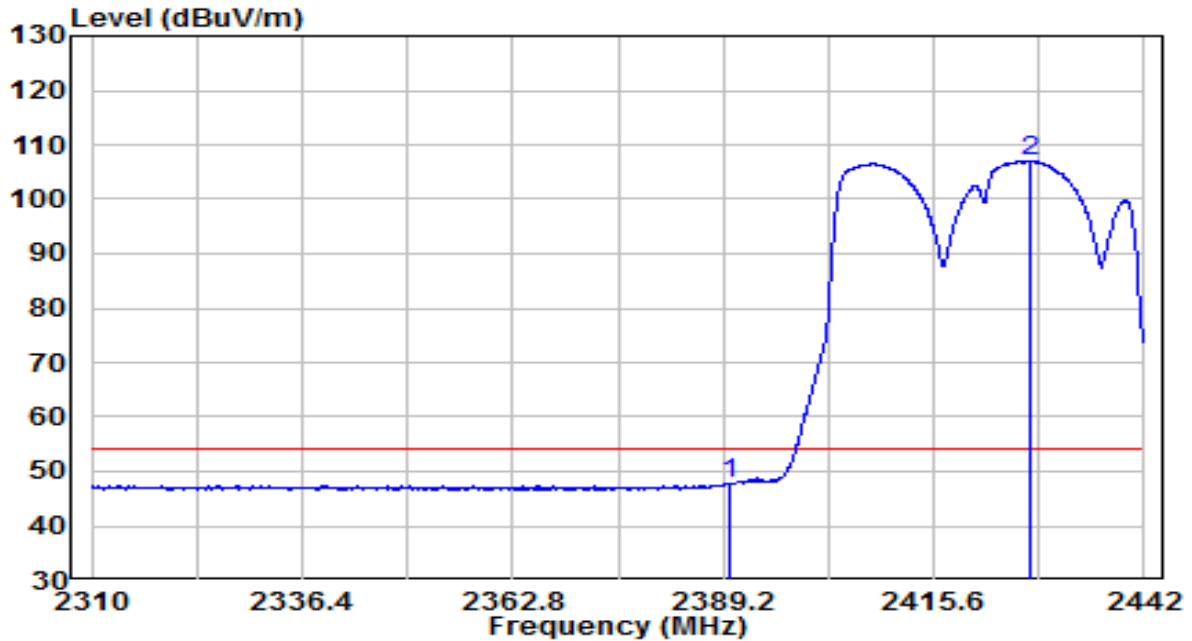


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	15.35	32.22	47.57	-6.43	54.00	Average
2	* 2427.546	74.65	32.38	107.03	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at channel 2452MHz	Test Voltage	By PoE

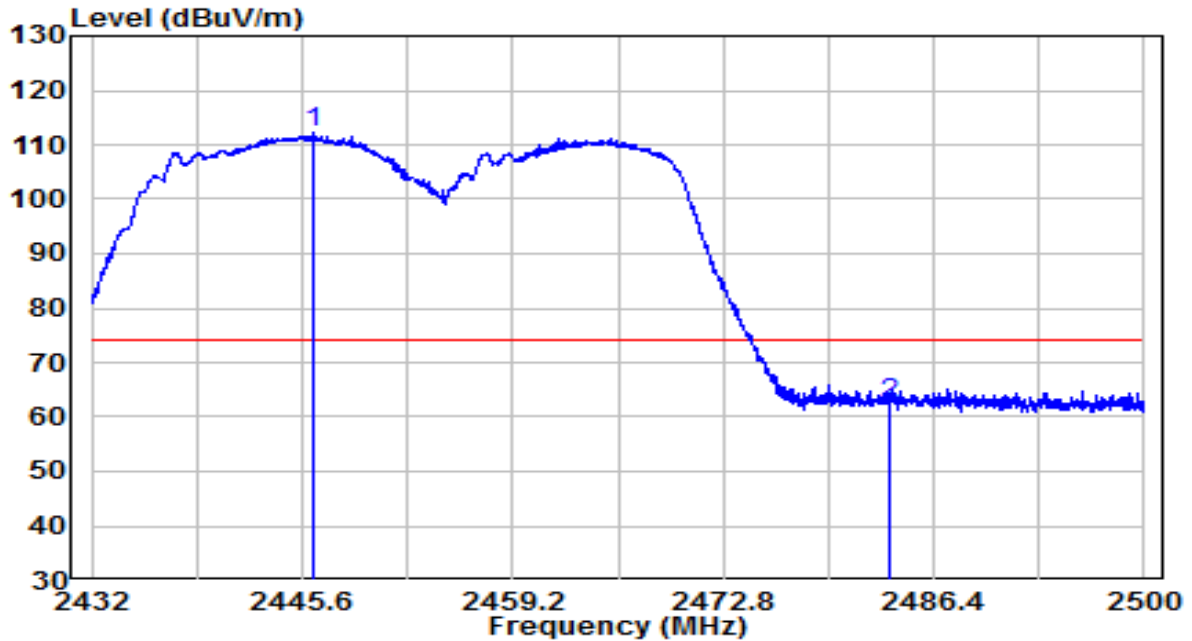


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	79.84	32.45	112.30	N/A	N/A	Peak
2		29.83	32.61	62.44	-11.56	74.00	Peak

Note:

1. "\*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at channel 2452MHz	Test Voltage	By PoE

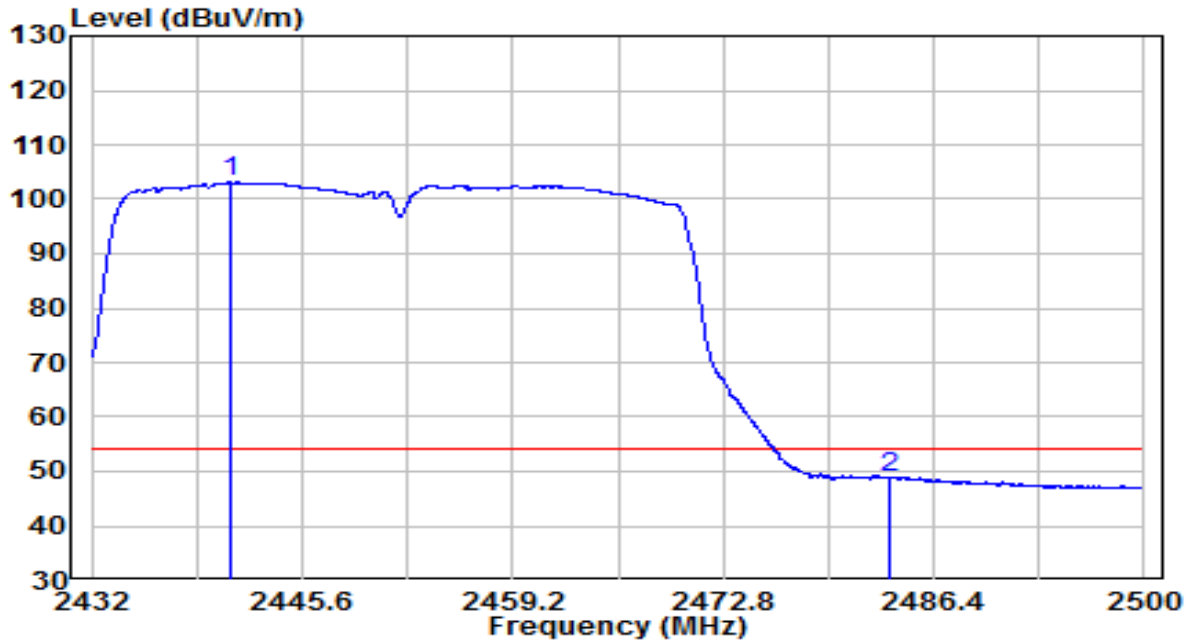


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2440.908	70.71	32.43	103.14	N/A	N/A	Average
2	2483.500	16.38	32.61	48.99	-5.01	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at channel 2452MHz	Test Voltage	By PoE

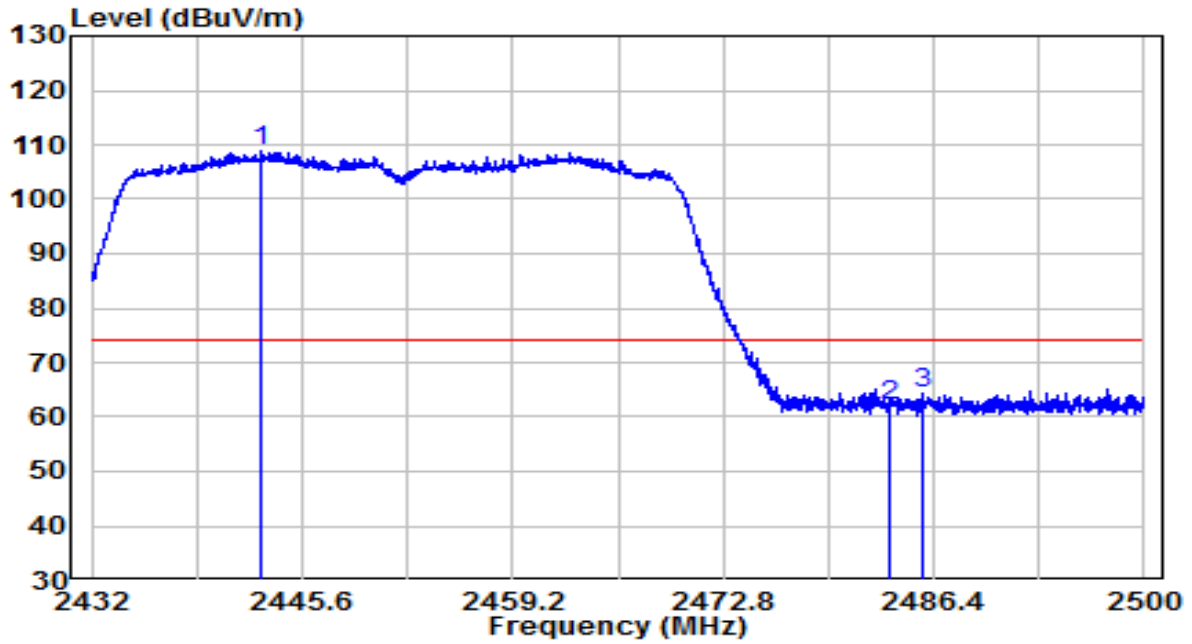


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	* 2442.914	76.28	32.44	108.72	N/A	N/A	Peak
2	2483.500	29.44	32.61	62.05	-11.95	74.00	Peak
3	2485.686	31.86	32.62	64.48	-9.52	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11n-HT40 at channel 2452MHz	Test Voltage	By PoE

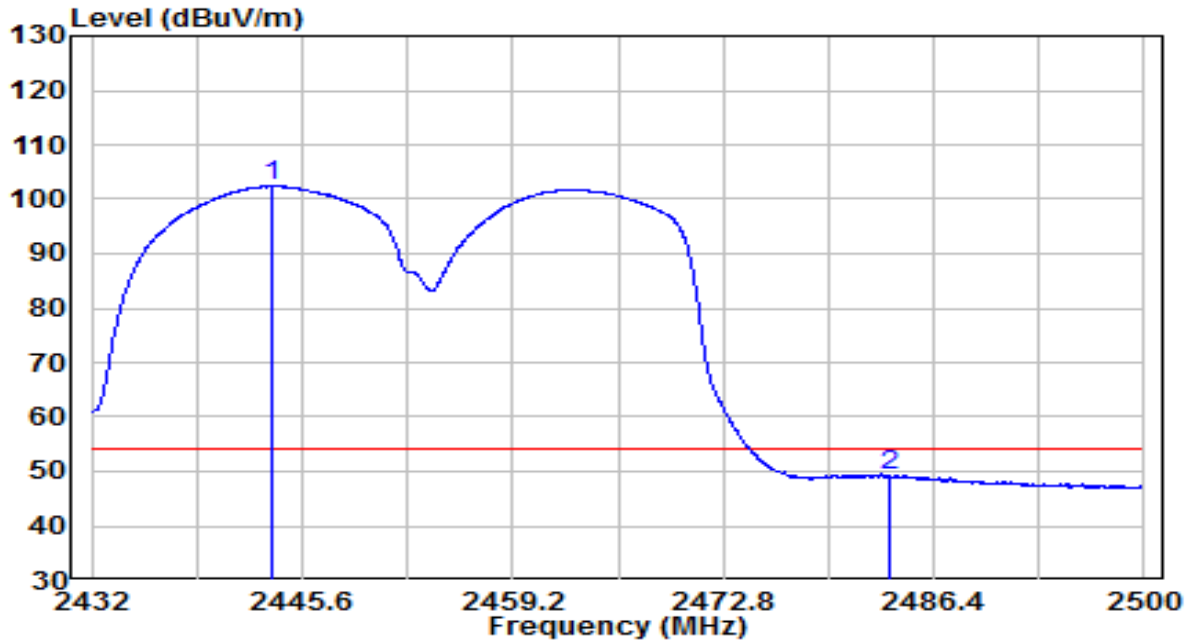


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 2443.628	69.93	32.44	102.37	N/A	N/A	Average
2	2483.500	16.46	32.61	49.07	-4.93	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 2412MHz	Test Voltage	By PoE

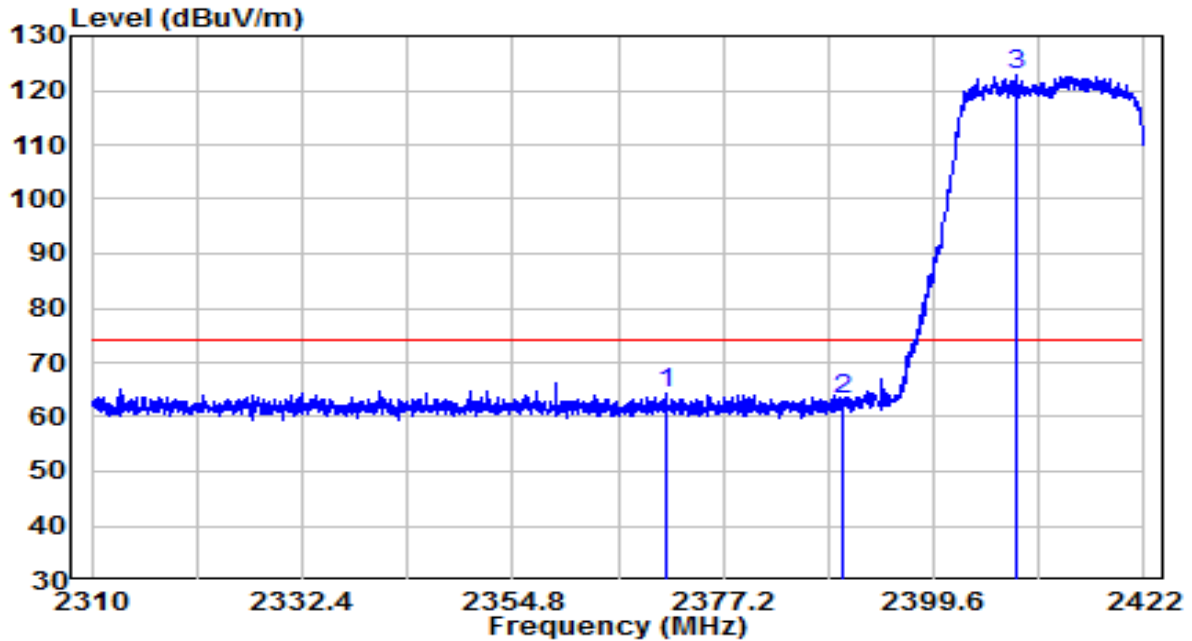


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2371.096	32.19	32.14	64.33	-9.67	74.00	Peak
2	2390.000	30.83	32.22	63.05	-10.95	74.00	Peak
3	* 2408.392	90.46	32.30	122.76	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 2412MHz	Test Voltage	By PoE

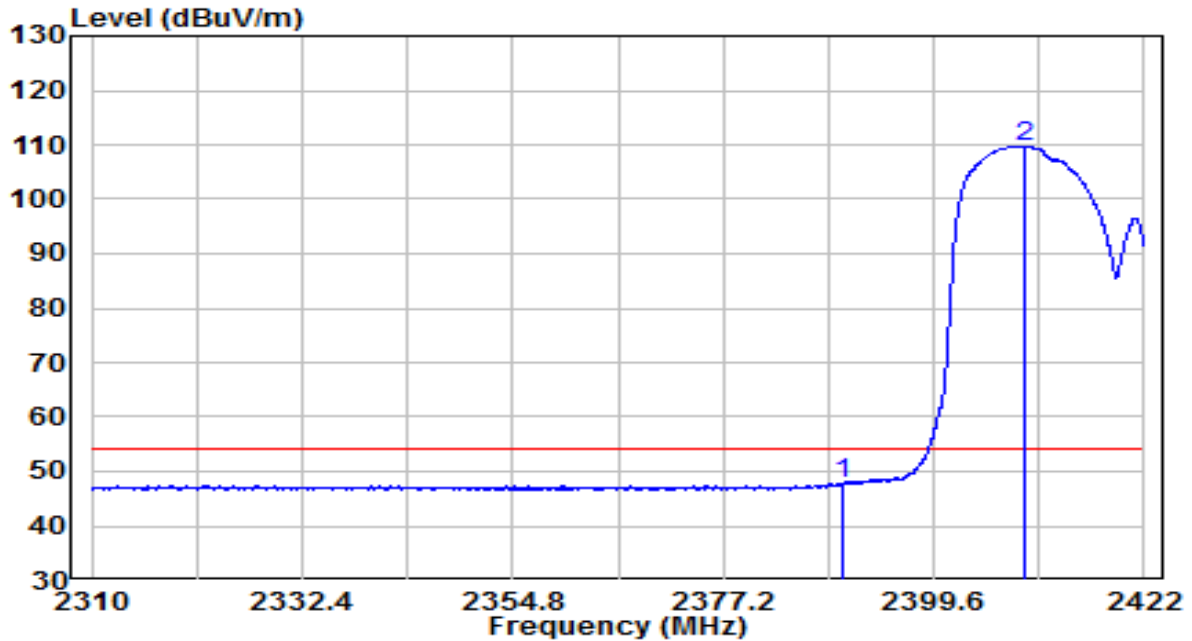


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	15.43	32.22	47.64	-6.36	54.00	Average
2	* 2409.232	77.48	32.30	109.77	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 2412MHz	Test Voltage	By PoE

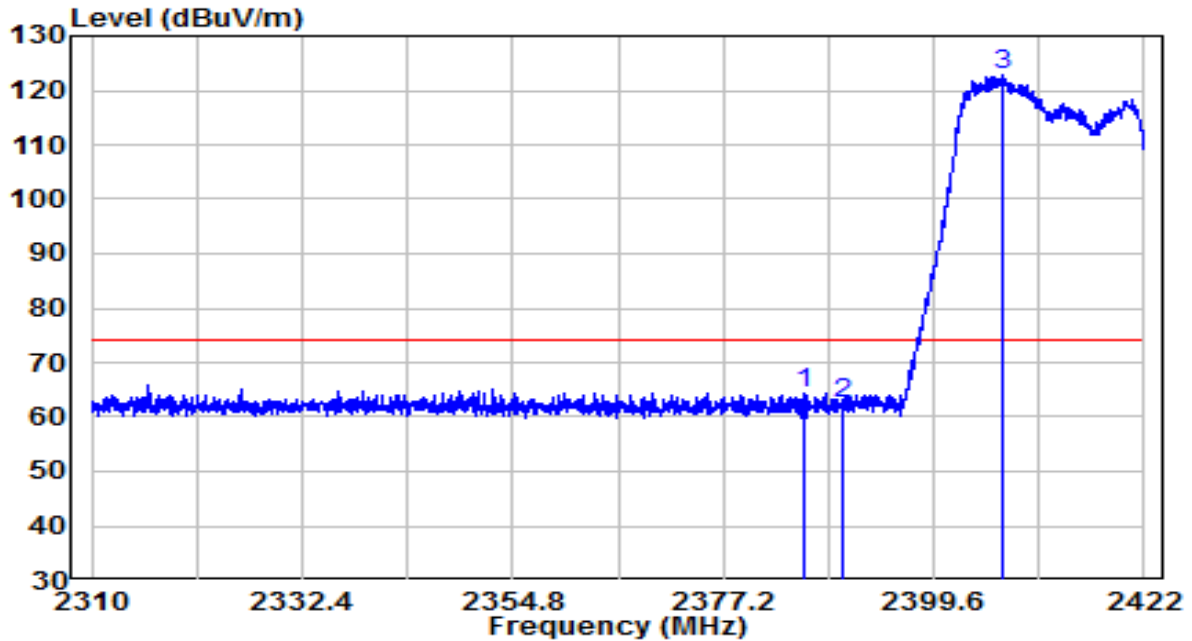


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2385.880	32.29	32.20	64.50	-9.50	74.00	Peak
2	2390.000	30.12	32.22	62.34	-11.66	74.00	Peak
3	* 2406.936	90.42	32.29	122.71	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 2412MHz	Test Voltage	By PoE

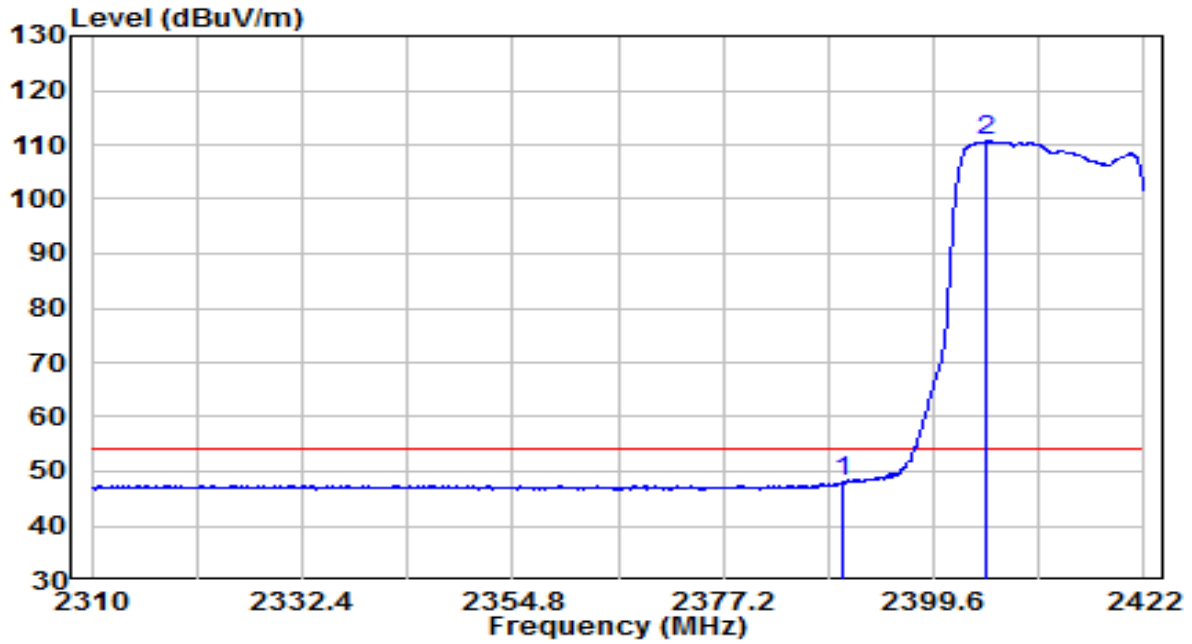


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2390.000	15.72	32.22	47.94	-6.06	54.00	Average
2	* 2405.144	78.32	32.28	110.61	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 2462MHz	Test Voltage	By PoE

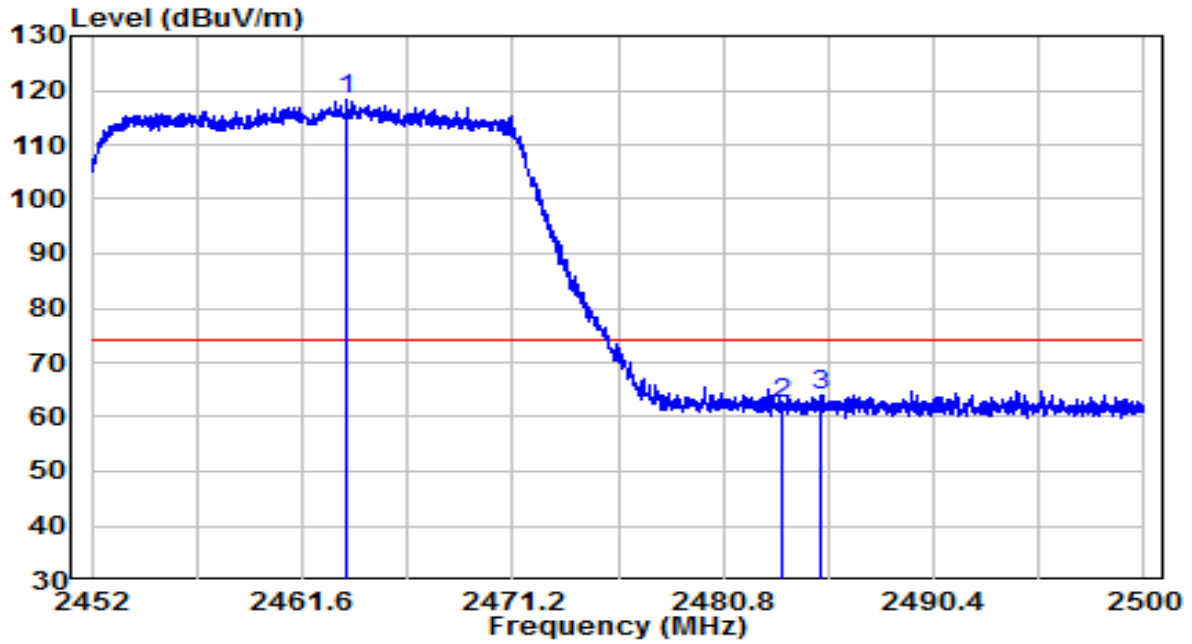


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2463.640	85.82	32.53	118.34	N/A	N/A	Peak
2		2483.500	29.66	32.61	62.27	-11.73	74.00	Peak
3		2485.288	31.52	32.62	64.14	-9.86	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 2462MHz	Test Voltage	By PoE

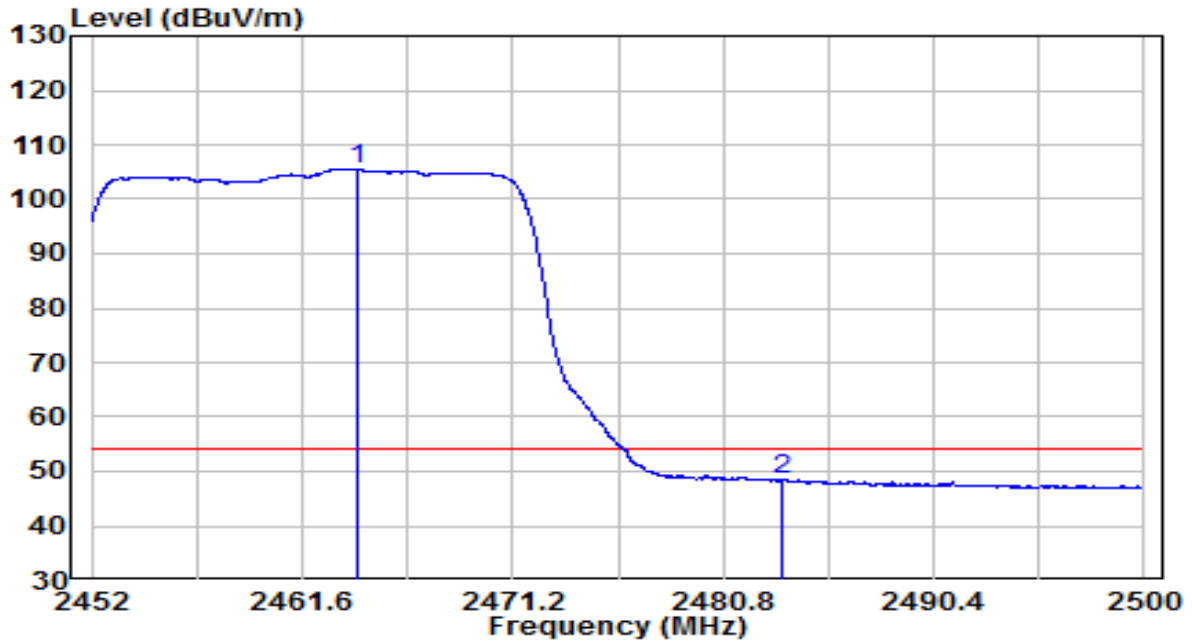


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	*	72.96	32.53	105.49	N/A	N/A	Average
2		15.81	32.61	48.42	-5.58	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 2462MHz	Test Voltage	By PoE

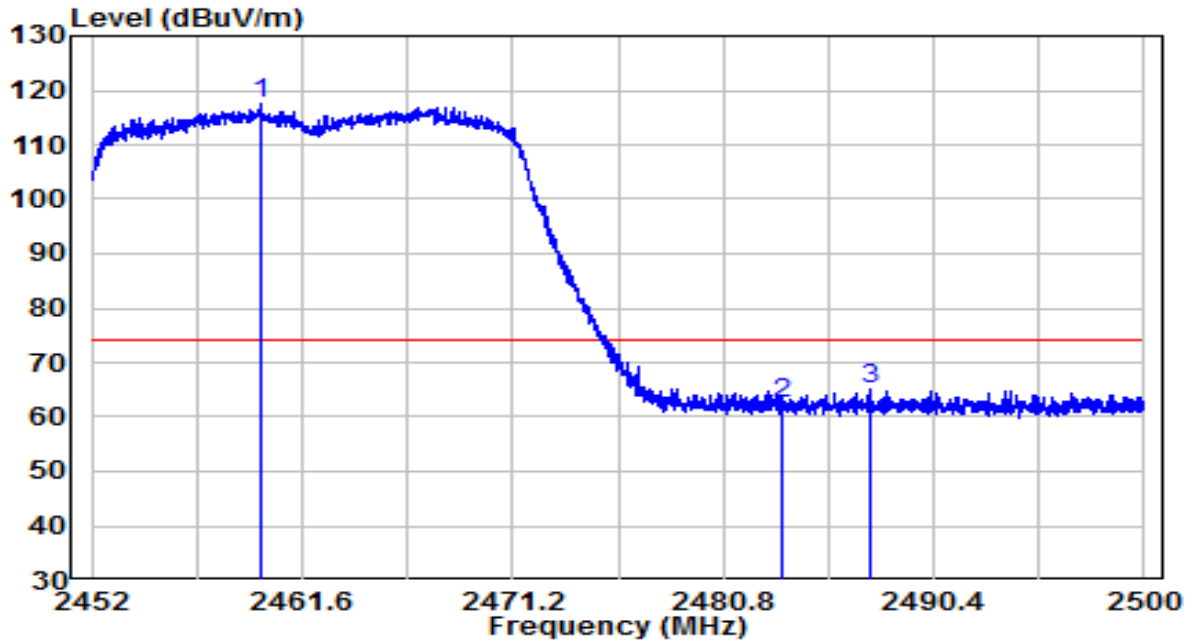


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	84.86	32.51	117.37	N/A	N/A	Peak
2		29.91	32.61	62.52	-11.48	74.00	Peak
3		32.30	32.63	64.93	-9.07	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 2462MHz	Test Voltage	By PoE

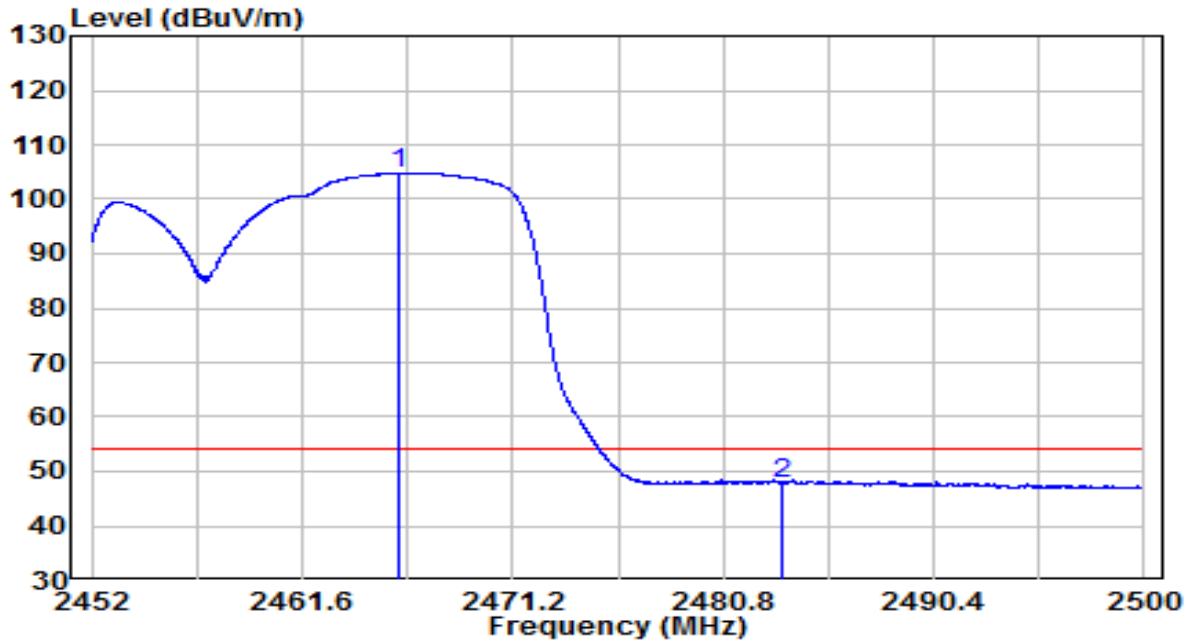


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	72.22	32.54	104.76	N/A	N/A	Average
2		15.26	32.61	47.87	-6.13	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 2422MHz	Test Voltage	By PoE

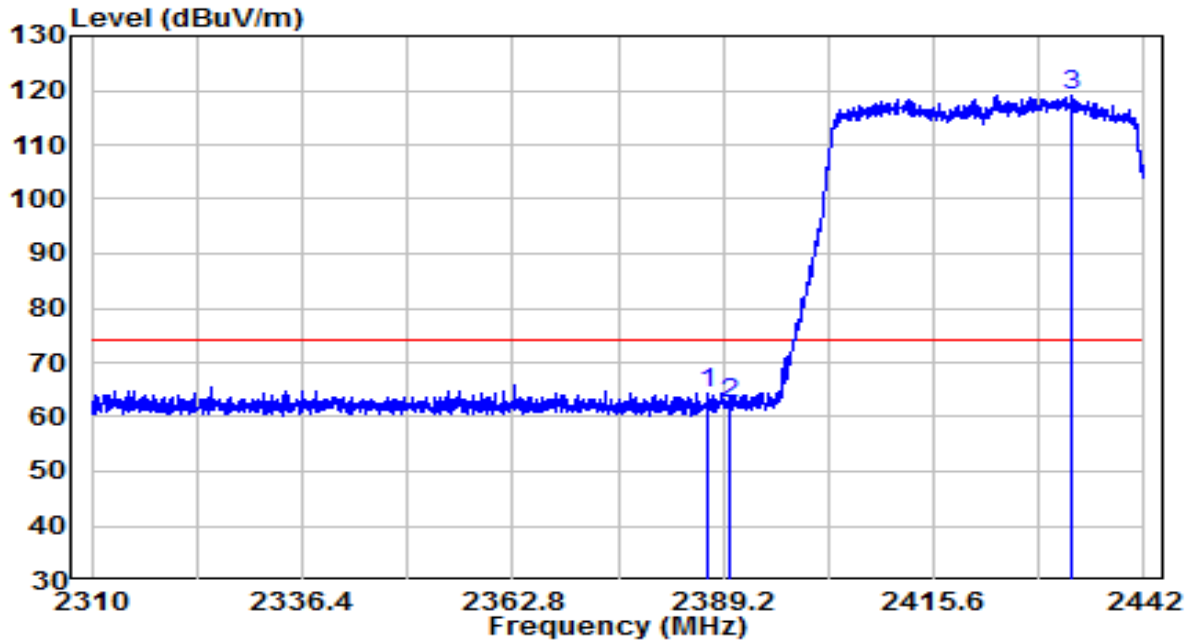


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2387.286	32.21	32.21	64.41	-9.59	74.00	Peak
2	2390.000	30.26	32.22	62.48	-11.52	74.00	Peak
3	* 2433.024	86.70	32.40	119.10	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 2422MHz	Test Voltage	By PoE

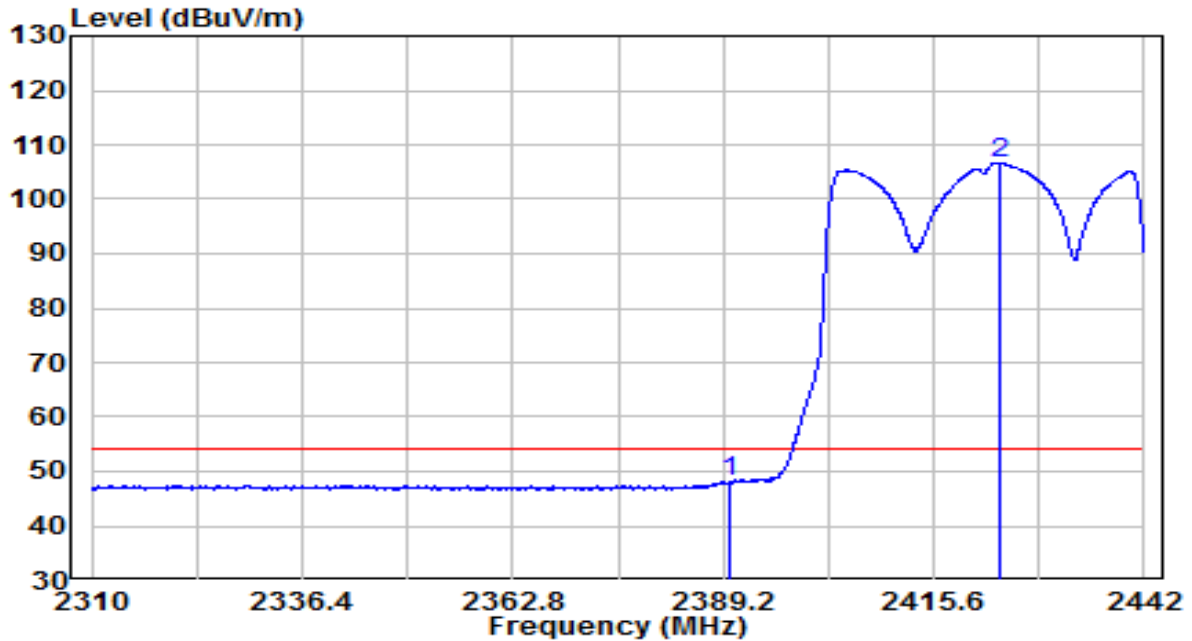


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	15.88	32.22	48.10	-5.90	54.00	Average
2	* 2423.850	74.27	32.36	106.63	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 2422MHz	Test Voltage	By PoE

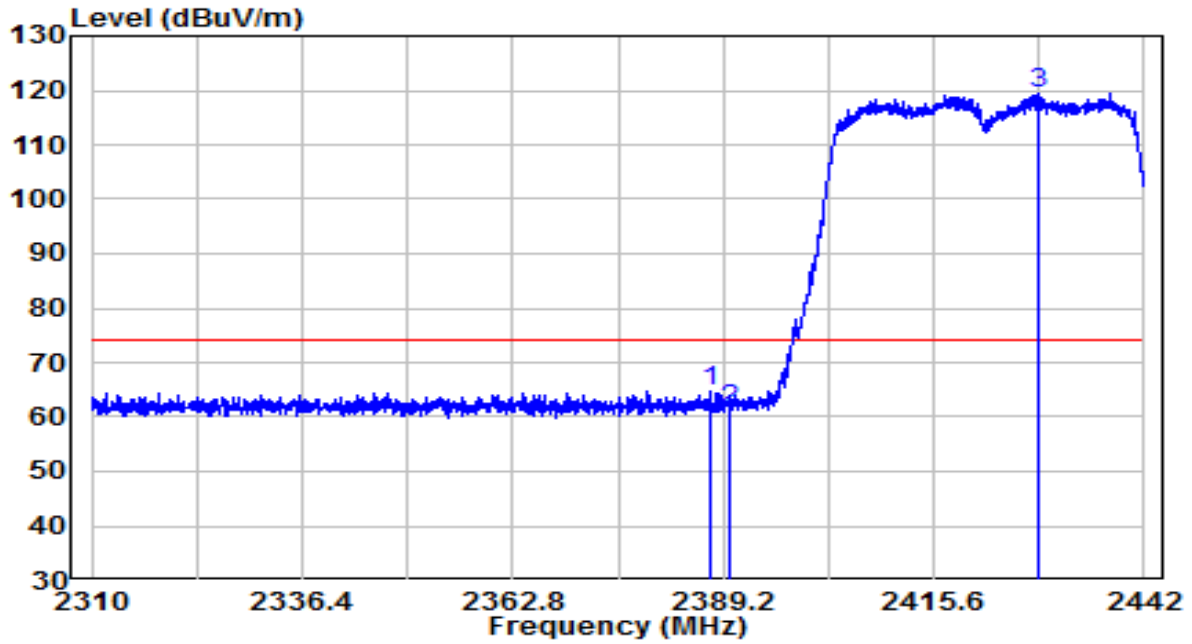


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2387.550	32.37	32.21	64.57	-9.43	74.00	Peak
2	2390.000	29.19	32.22	61.41	-12.59	74.00	Peak
3	* 2428.602	86.96	32.38	119.34	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 2422MHz	Test Voltage	By PoE

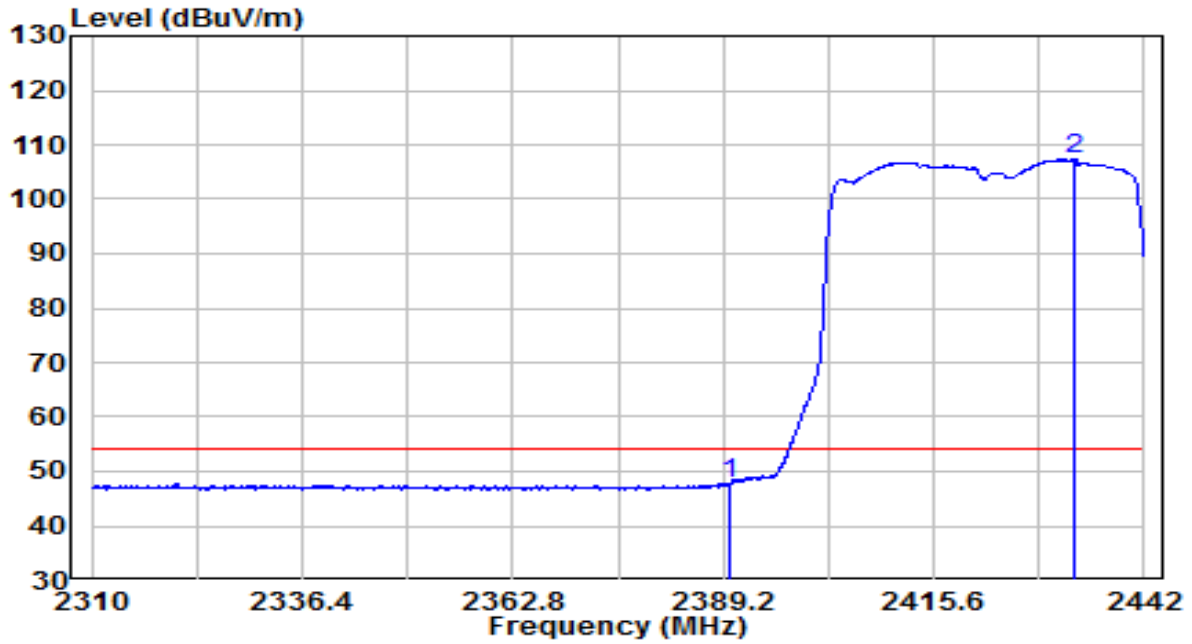


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2390.000	15.34	32.22	47.56	-6.44	54.00	Average
2	* 2433.090	74.87	32.40	107.26	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 2452MHz	Test Voltage	By PoE

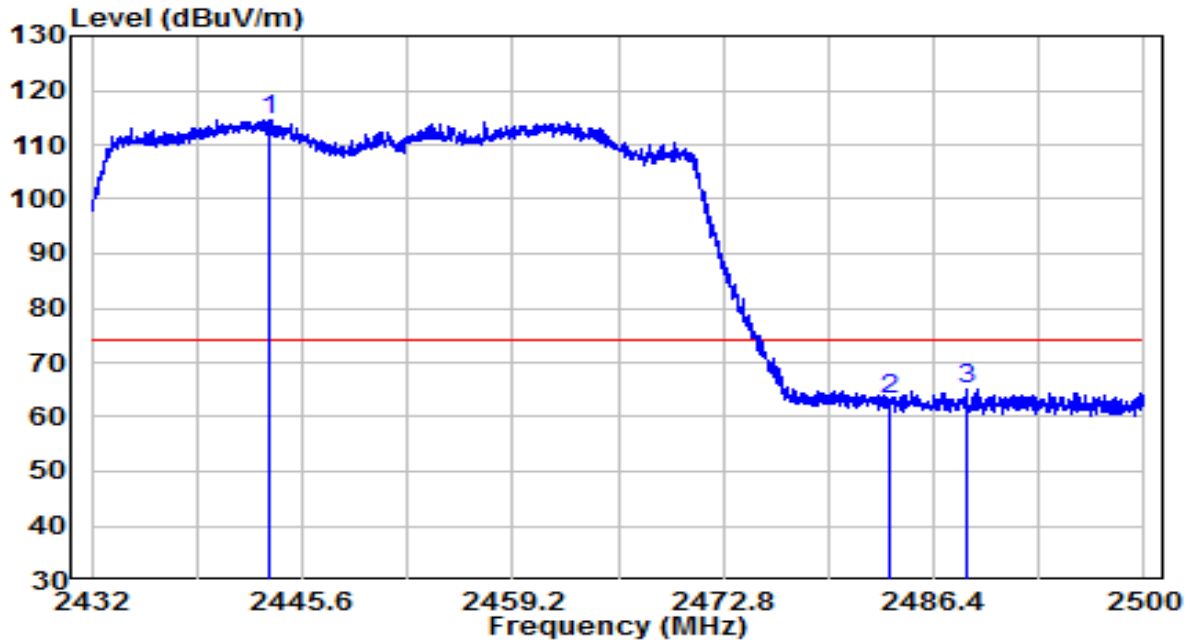


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2443.390	82.16	32.44	114.60	N/A	N/A	Peak
2		2483.500	30.51	32.61	63.12	-10.88	74.00	Peak
3		2488.576	32.52	32.63	65.15	-8.85	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).



EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 2452MHz	Test Voltage	By PoE

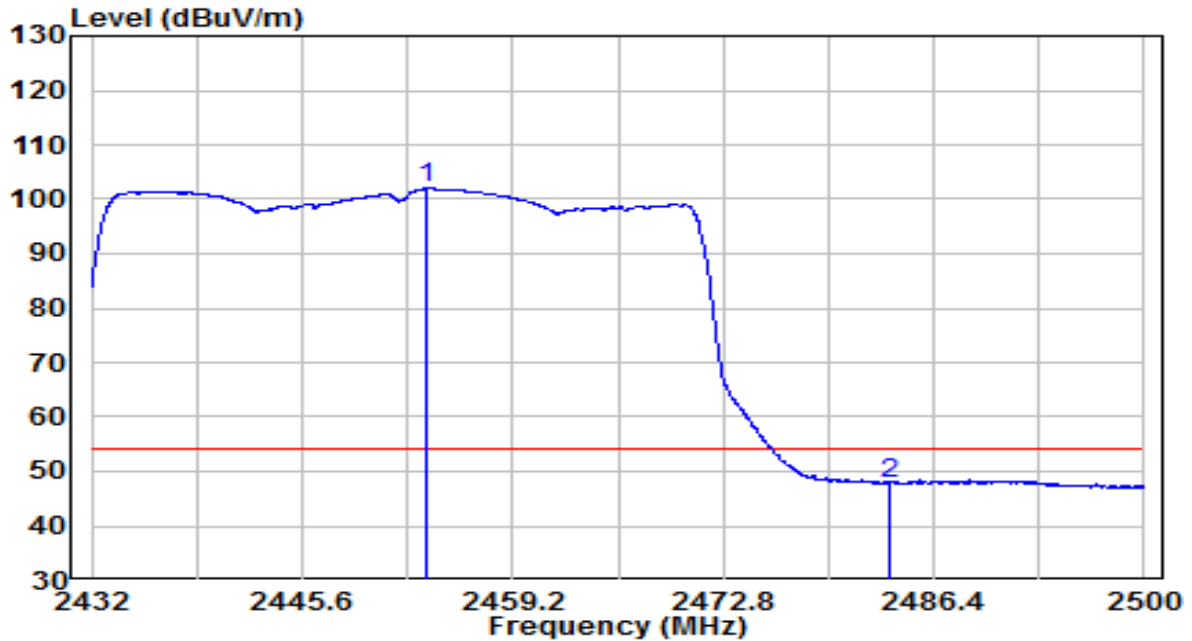


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2453.658	69.51	32.49	102.00	N/A	N/A	Average
2		2483.500	15.24	32.61	47.85	-6.15	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 2452MHz	Test Voltage	By PoE

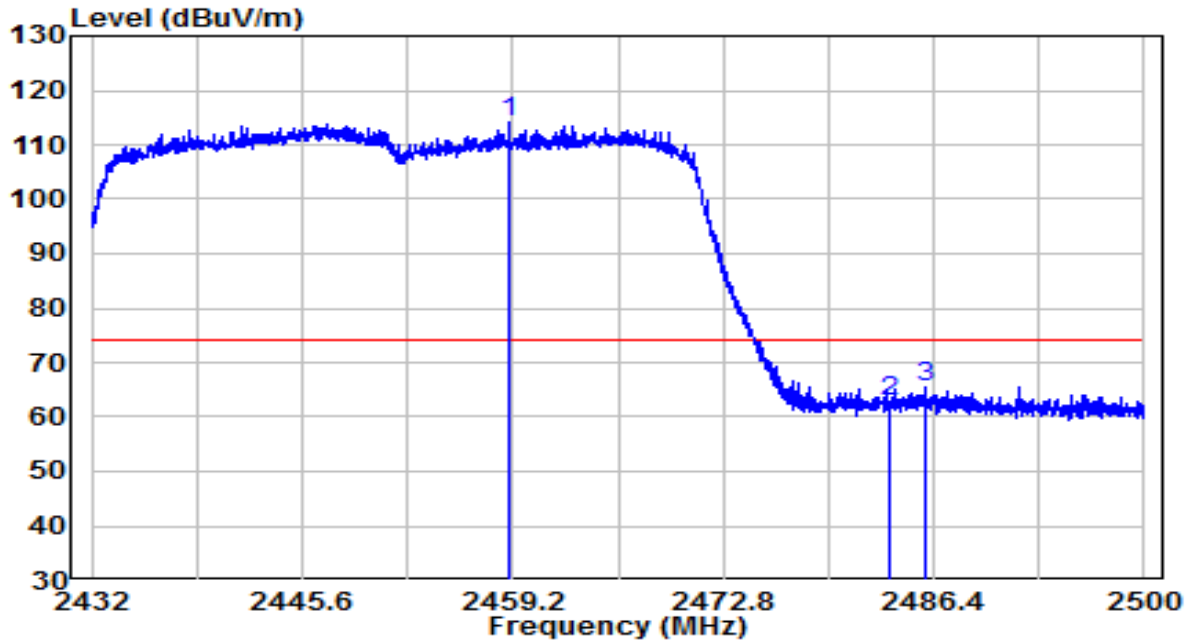


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	81.51	32.51	114.02	N/A	N/A	Peak
2		30.19	32.61	62.80	-11.20	74.00	Peak
3		32.98	32.62	65.60	-8.40	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ASSESS POINT	Date of Test	2021-10-28
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.2°C/47.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 2452MHz	Test Voltage	By PoE

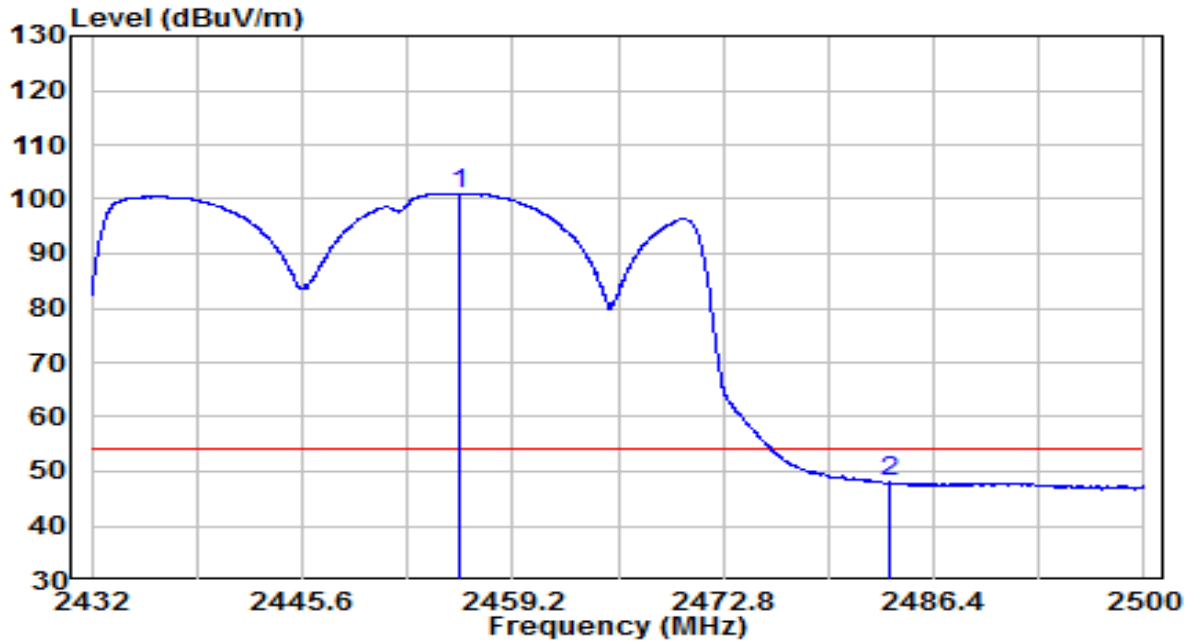


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2455.732	68.62	32.49	101.12	N/A	N/A	Average
2		2483.500	15.39	32.61	48.00	-6.00	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

**APEX0584 Filter 2# & ANT Model No.: ANT-2x2-2314**

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2412MHz	Test Voltage	By PoE

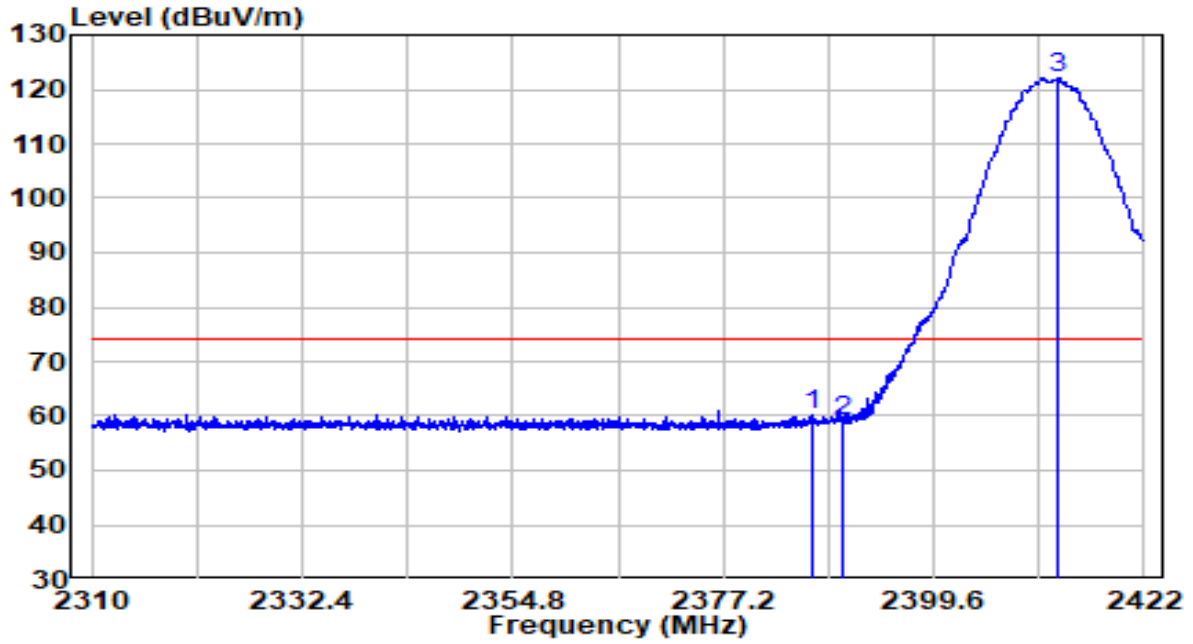


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2386.664	28.02	32.20	60.22	-13.78	74.00	Peak
2	2390.024	26.86	32.22	59.08	-14.92	74.00	Peak
3	* 2412.872	89.89	32.31	122.20	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2412MHz	Test Voltage	By PoE

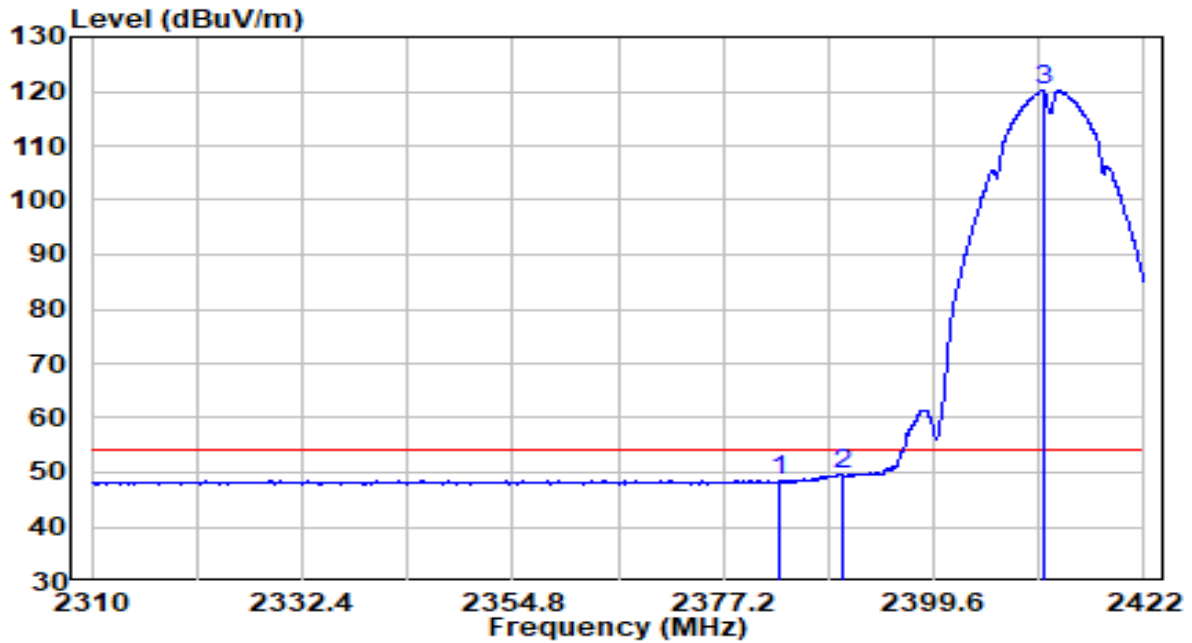


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2383.248	16.40	32.19	48.59	-5.41	54.00	Average
2	2390.000	17.44	32.22	49.66	-4.34	54.00	Average
3	* 2411.248	87.90	32.31	120.21	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2412MHz	Test Voltage	By PoE

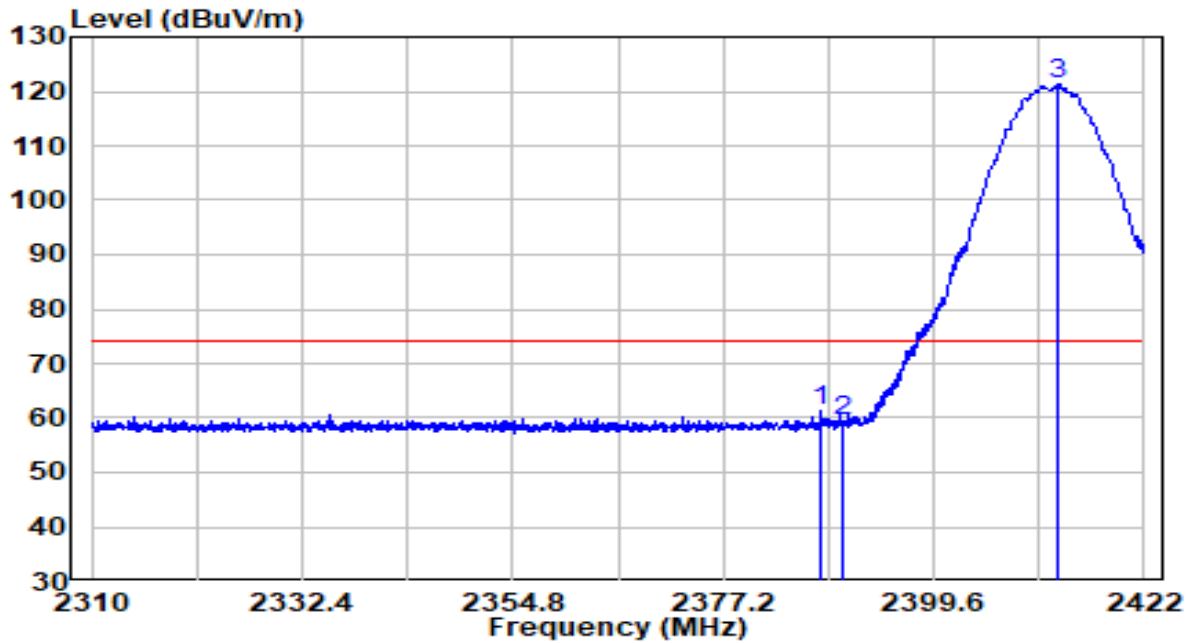


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	2387.672	28.96	32.21	61.17	-12.83	74.00	Peak
2	2390.024	27.19	32.22	59.40	-14.60	74.00	Peak
3	* 2412.872	88.96	32.31	121.27	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2412MHz	Test Voltage	By PoE

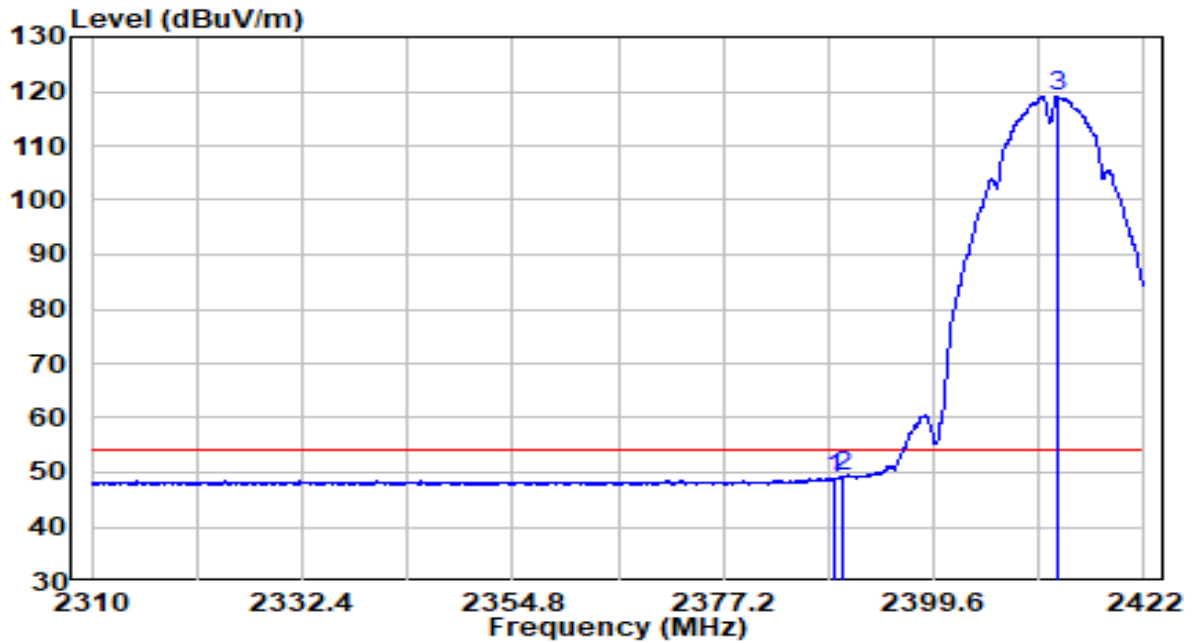


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	2389.128	16.84	32.21	49.05	-4.95	54.00	Average
2	2390.024	16.90	32.22	49.11	-4.89	54.00	Average
3	* 2412.816	86.84	32.31	119.15	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

**APEX0584 Filter 3# & ANT Model No.: ANT-2x2-2314**

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2462MHz	Test Voltage	By PoE

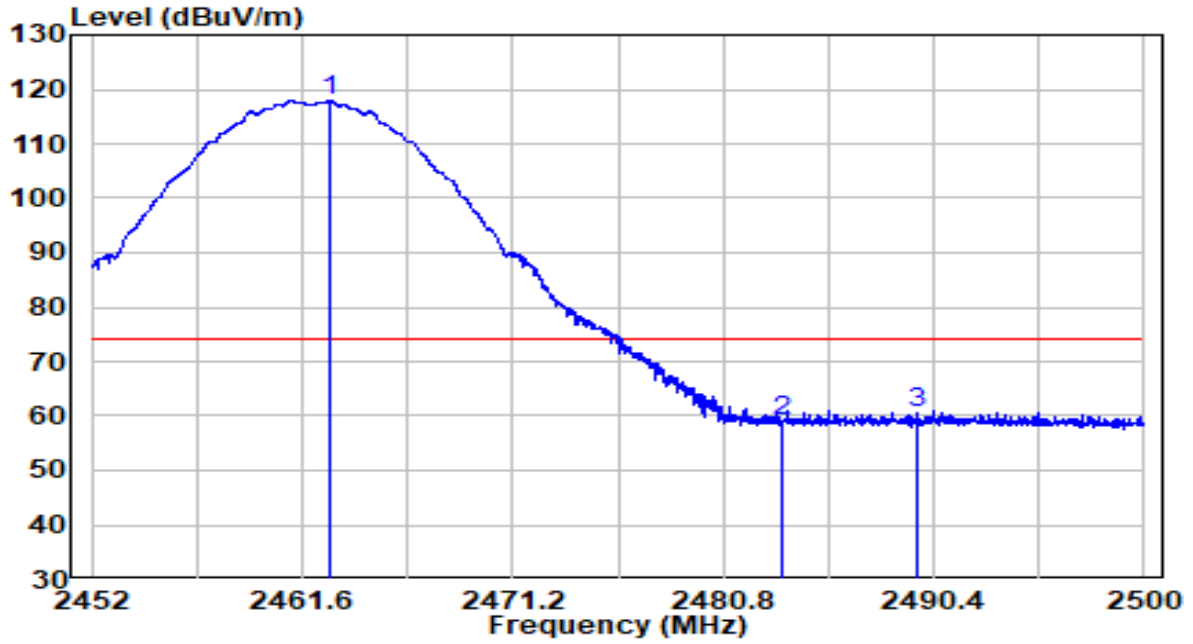


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	*	85.53	32.52	118.05	N/A	N/A	Peak
2		26.53	32.61	59.14	-14.86	74.00	Peak
3		28.05	32.64	60.68	-13.32	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2462MHz	Test Voltage	By PoE

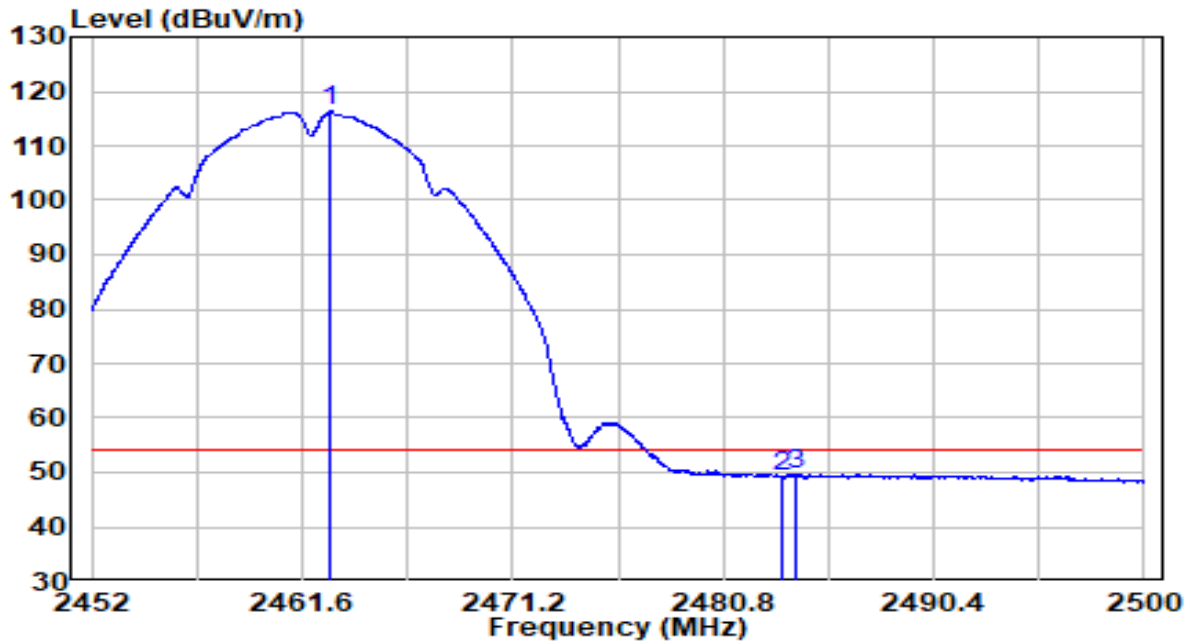


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)	
1	*	2462.920	83.77	32.52	116.30	N/A	N/A	Average
2		2483.488	16.78	32.61	49.39	-4.61	54.00	Average
3		2484.088	17.10	32.61	49.71	-4.29	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2462MHz	Test Voltage	By PoE

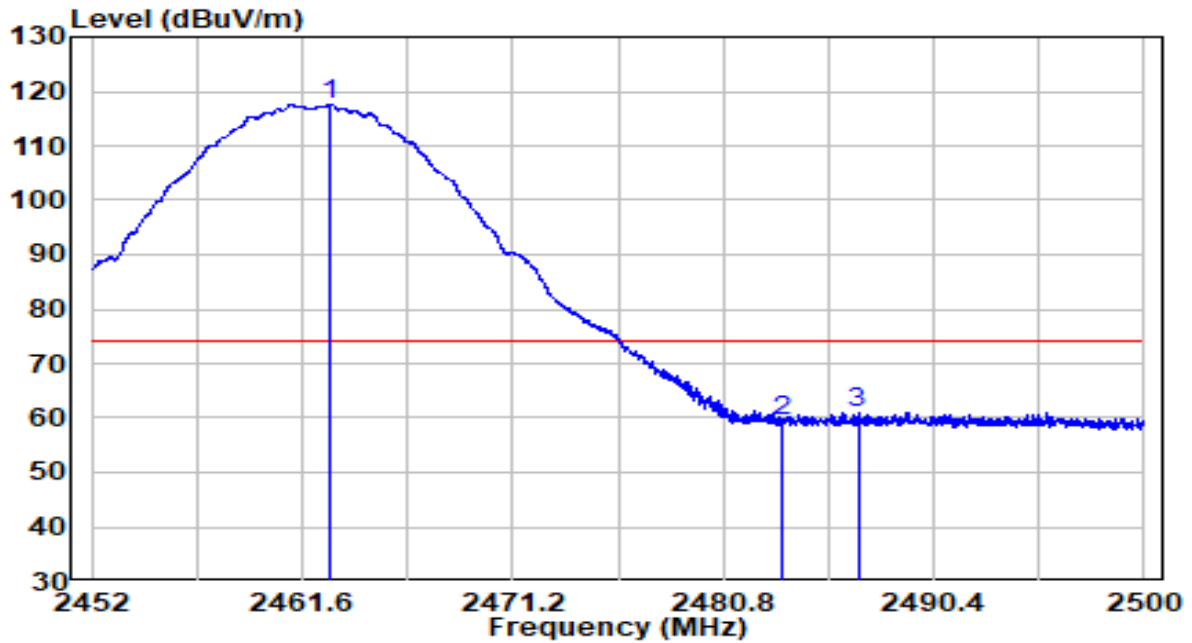


No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)
1	*	85.21	32.52	117.73	N/A	N/A	Peak
2		26.98	32.61	59.59	-14.41	74.00	Peak
3		28.40	32.63	61.02	-12.98	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	24.4°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11b at Channel 2462MHz	Test Voltage	By PoE

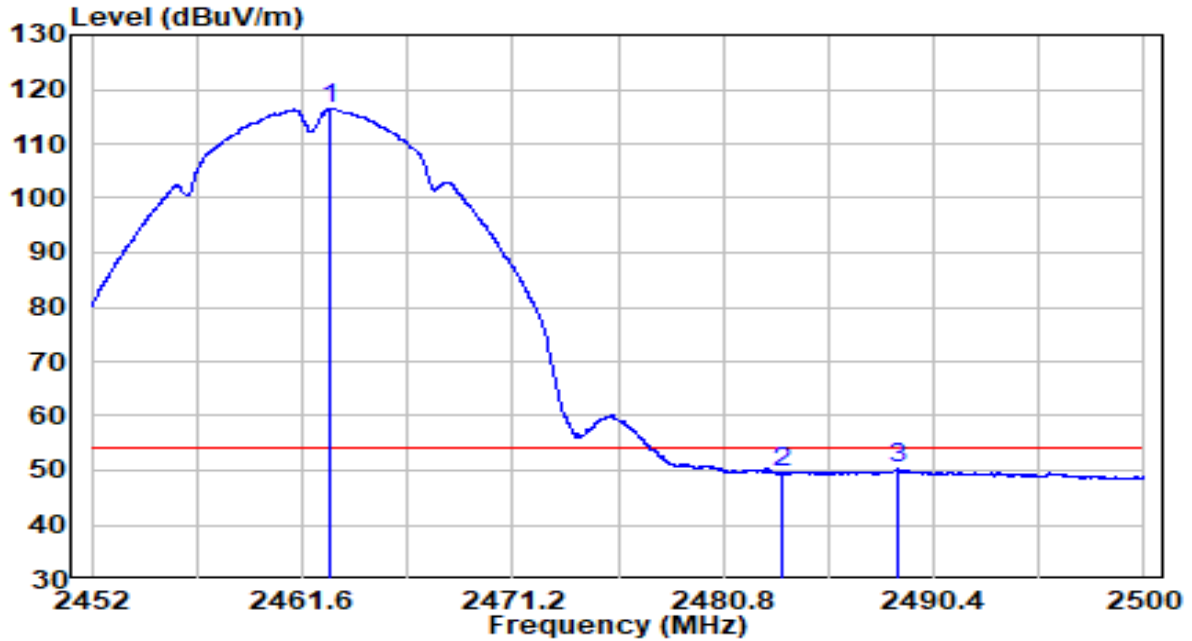

No	Frequency (MHz)	Reading (dB $\mu$ V)	C.F (dB/m)	Measurement (dB $\mu$ V/m)	Margin (dB)	Limit (dB $\mu$ V/m)	Remark (QP/PK/AV)	
1	*	2462.920	84.07	32.52	116.60	N/A	N/A	Average
2		2483.488	16.87	32.61	49.48	-4.52	54.00	Average
3		2488.720	17.56	32.63	50.19	-3.81	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dB $\mu$ V/m) = Reading(dB $\mu$ V) + C.F (Correction Factor).