


EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	By PoE

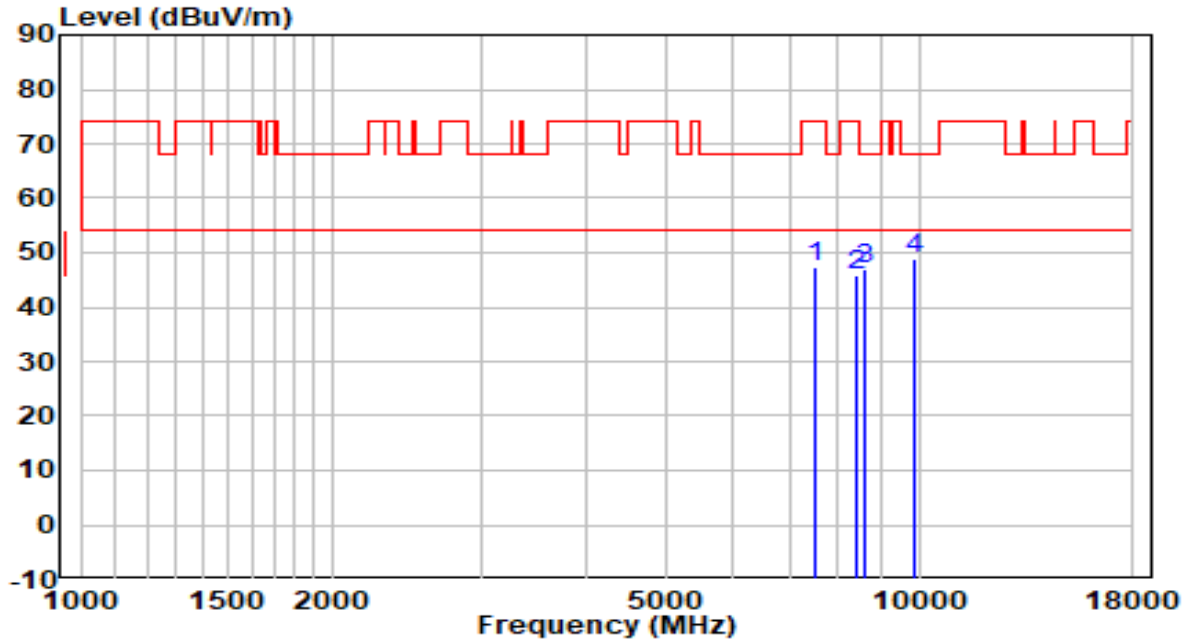


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7528.000	34.25	13.04	47.28	-26.72	74.00	Peak
2	8412.000	32.23	13.62	45.84	-28.16	74.00	Peak
3	8616.000	33.12	13.94	47.06	-21.14	68.20	Peak
4	* 9891.000	32.54	16.38	48.92	-19.28	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	By PoE

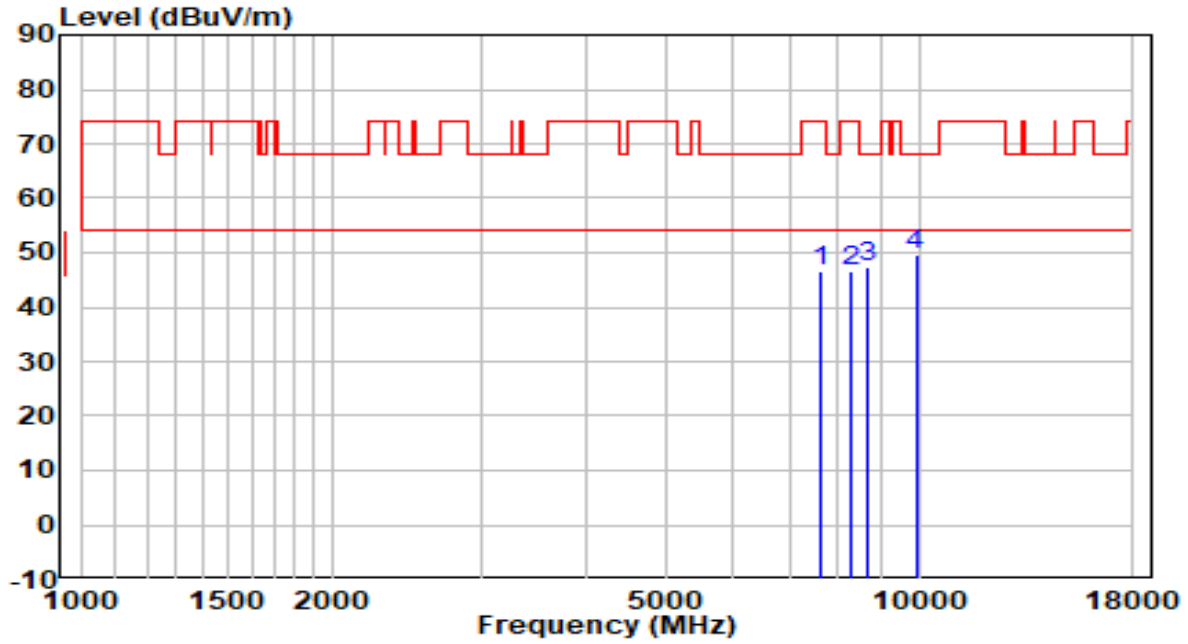


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7647.000	33.52	13.14	46.66	-27.34	74.00	Peak
2	8284.500	32.93	13.56	46.49	-27.51	74.00	Peak
3	8709.500	33.29	14.17	47.46	-20.74	68.20	Peak
4	* 9908.000	33.21	16.41	49.62	-18.58	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	By PoE

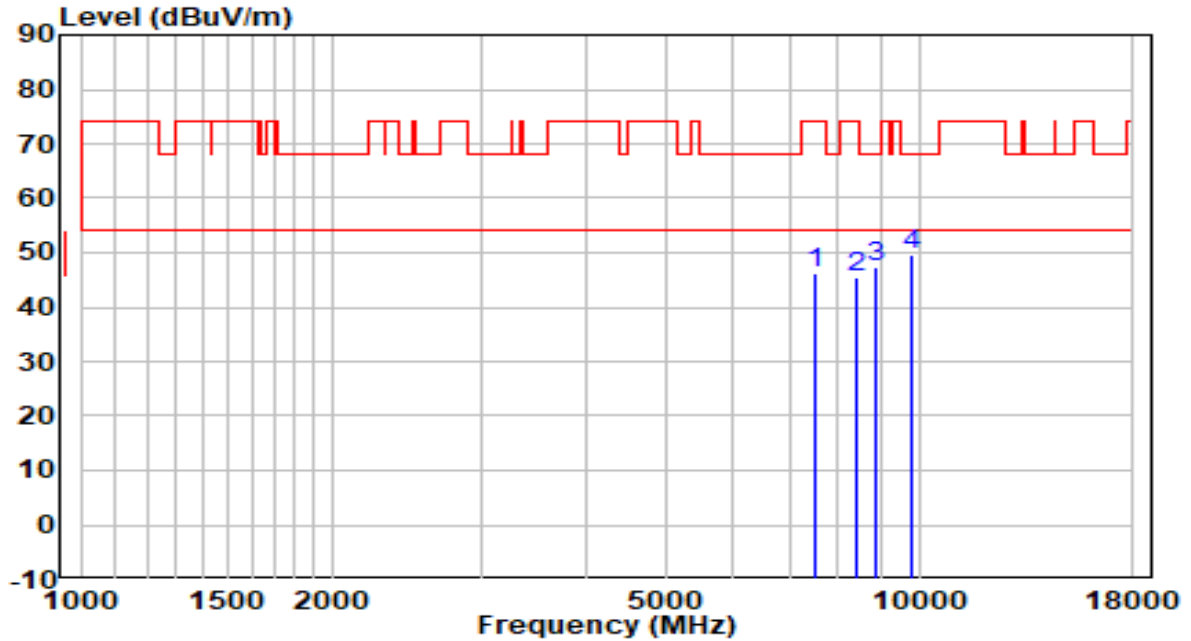


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7502.500	33.09	13.02	46.10	-27.90	74.00	Peak
2	8412.000	31.87	13.62	45.48	-28.52	74.00	Peak
3	8871.000	32.90	14.56	47.46	-20.74	68.20	Peak
4	* 9831.500	33.24	16.28	49.52	-18.68	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5610MHz	Test Voltage	By PoE

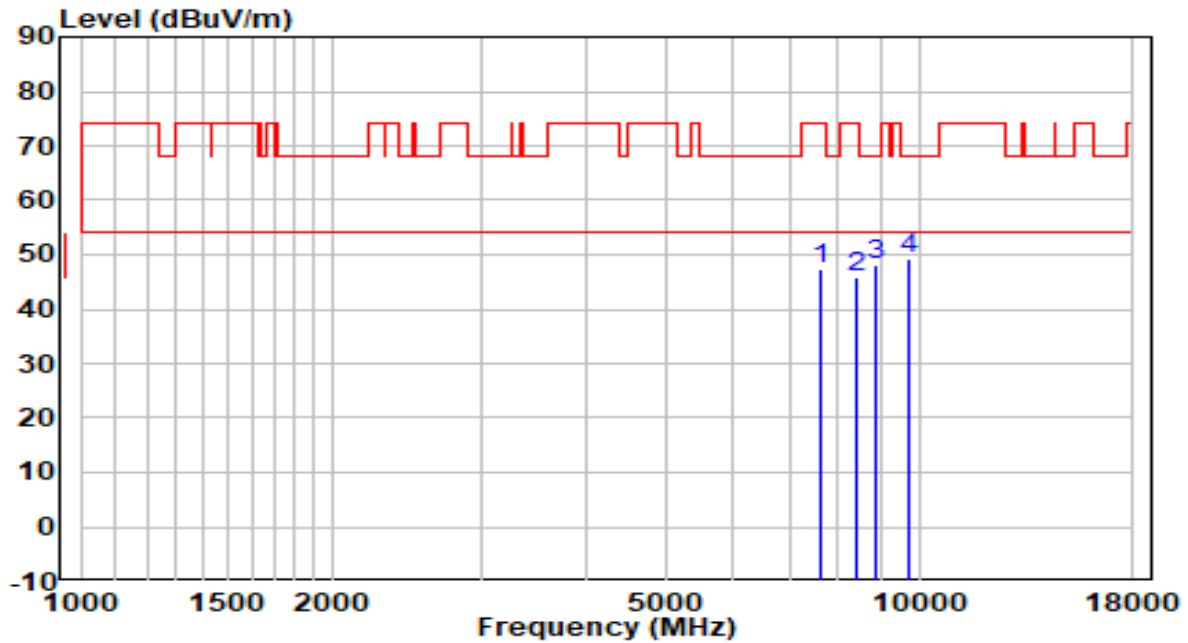


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7630.000	34.32	13.12	47.44	-26.56	74.00	Peak
2	8412.000	32.39	13.62	46.01	-27.99	74.00	Peak
3	8896.500	33.45	14.63	48.07	-20.13	68.20	Peak
4	* 9695.500	33.13	16.05	49.18	-19.02	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5610MHz	Test Voltage	By PoE

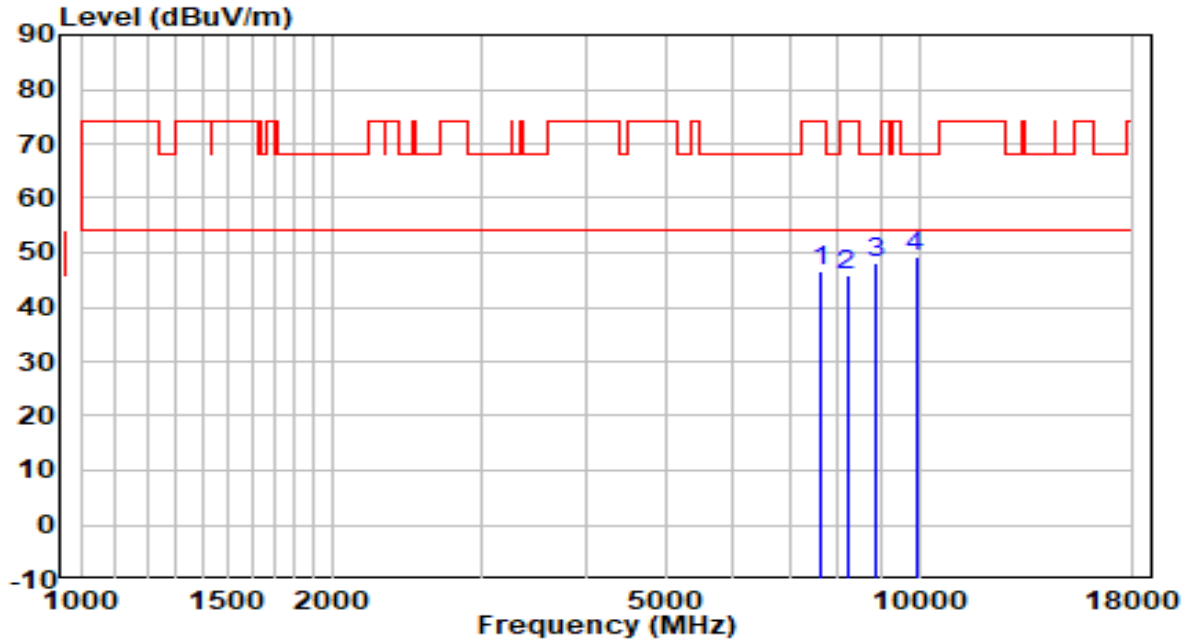


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7655.500	33.41	13.14	46.56	-27.44	74.00	Peak
2	8199.500	32.51	13.52	46.03	-27.97	74.00	Peak
3	8871.000	33.42	14.56	47.98	-20.22	68.20	Peak
4	* 9908.000	32.81	16.41	49.22	-18.98	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5690MHz	Test Voltage	By PoE

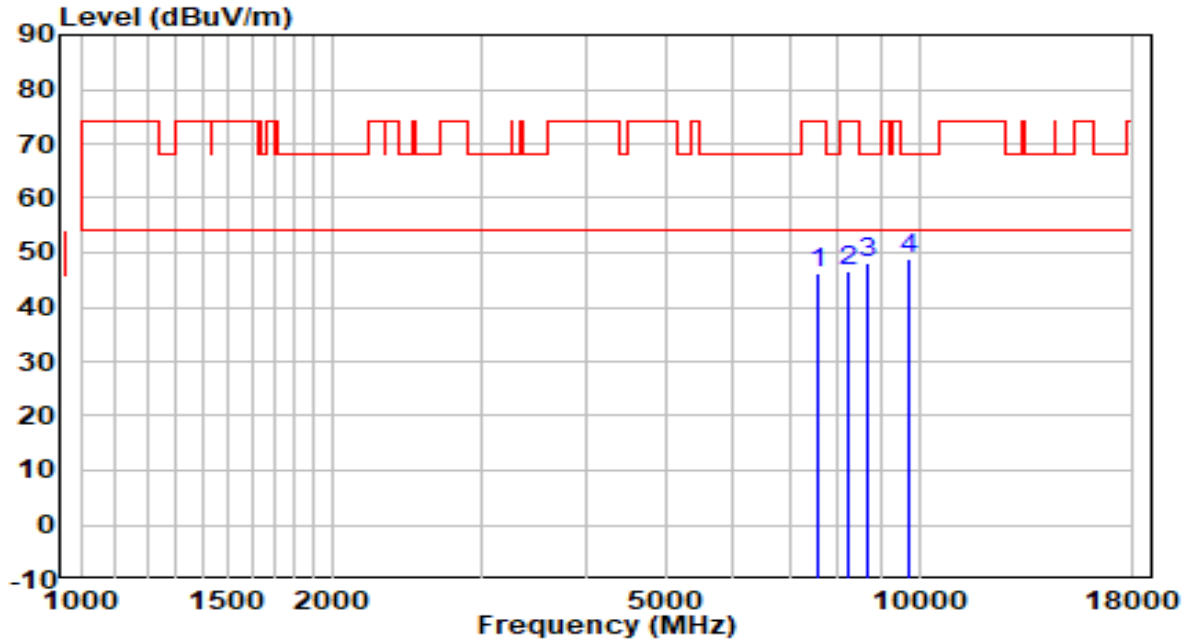


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7553.500	33.31	13.06	46.37	-27.63	74.00	Peak
2	8208.000	33.08	13.52	46.60	-27.40	74.00	Peak
3	8658.500	33.98	14.04	48.02	-20.18	68.20	Peak
4	* 9746.500	32.86	16.13	49.00	-19.20	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5690MHz	Test Voltage	By PoE

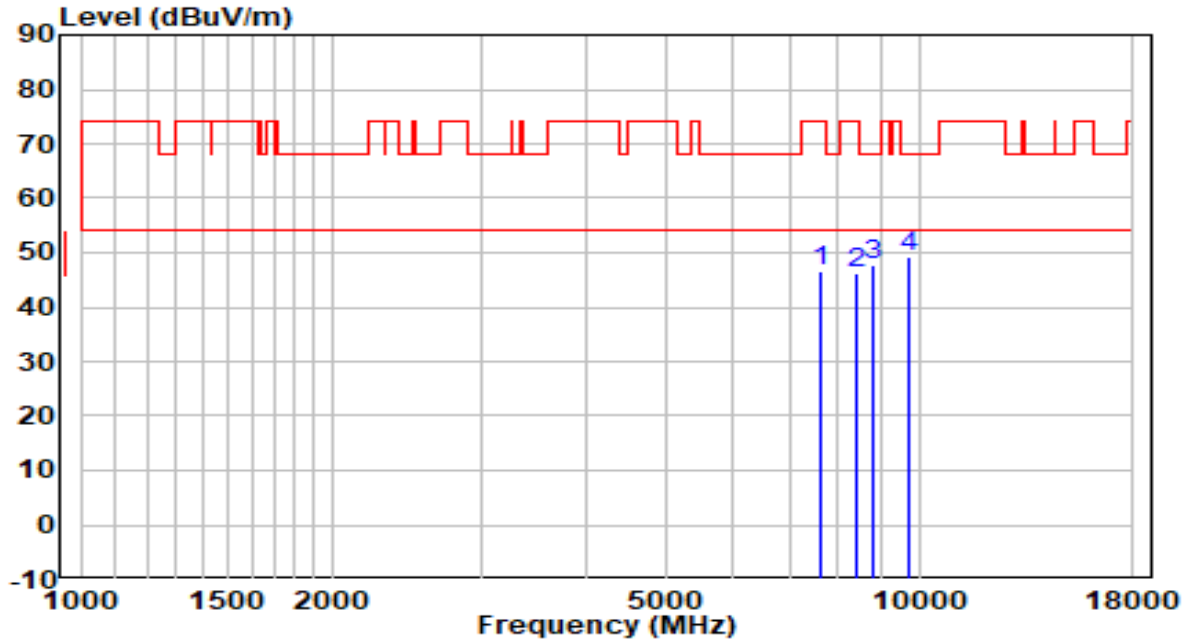


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7655.500	33.45	13.14	46.59	-27.41	74.00	Peak
2	8412.000	32.80	13.62	46.41	-27.59	74.00	Peak
3	8837.000	33.42	14.48	47.90	-20.30	68.20	Peak
4	* 9695.500	33.13	16.05	49.18	-19.02	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	By PoE

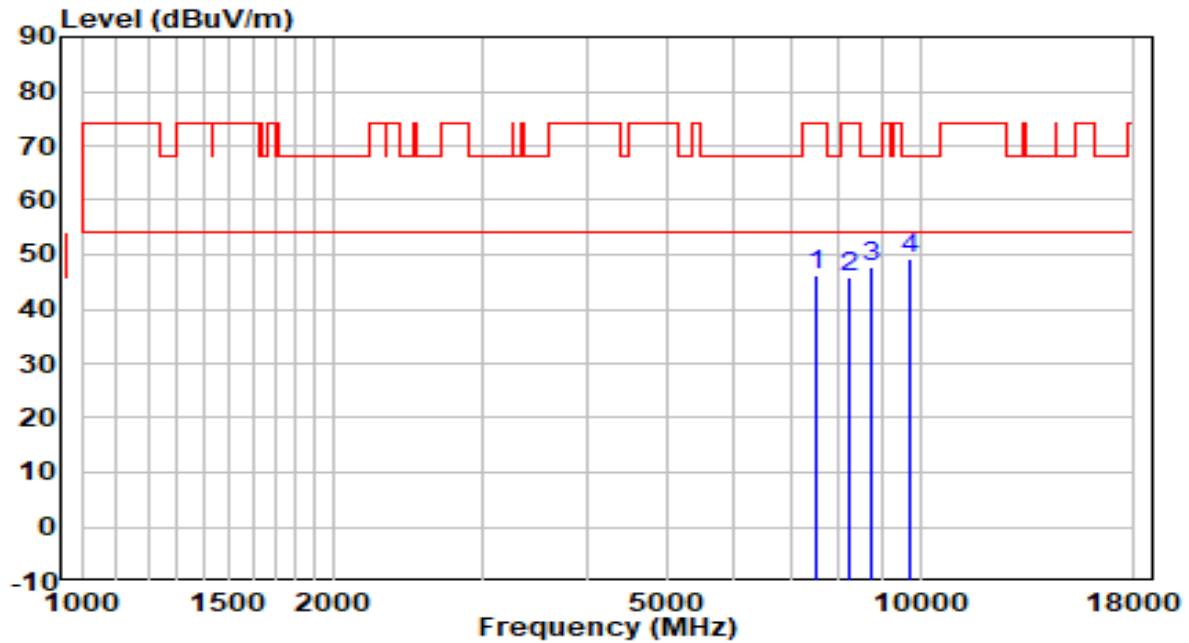


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7519.500	33.31	13.03	46.34	-27.66	74.00	Peak
2	8233.500	32.40	13.54	45.93	-28.07	74.00	Peak
3	8726.500	33.49	14.21	47.70	-20.50	68.20	Peak
4	* 9738.000	33.06	16.12	49.18	-19.02	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	By PoE

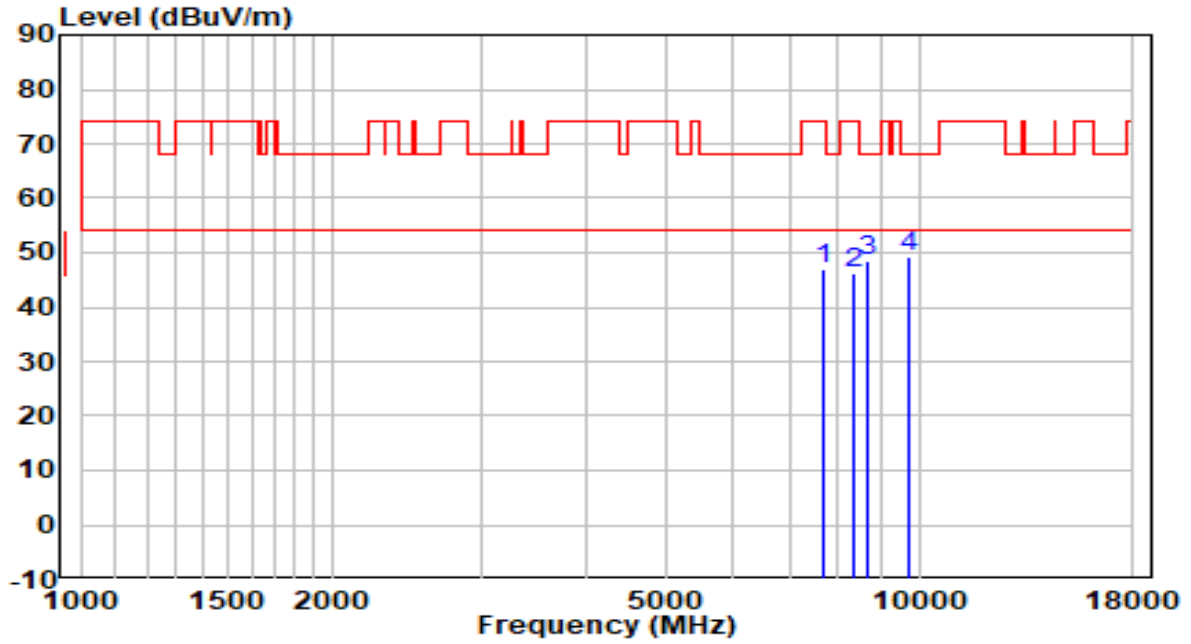


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7672.500	33.70	13.16	46.85	-27.15	74.00	Peak
2	8335.500	32.49	13.58	46.07	-27.93	74.00	Peak
3	8692.500	34.24	14.13	48.37	-19.83	68.20	Peak
4	* 9695.500	33.25	16.05	49.30	-18.90	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80+80 at Channel 5210+5290MHz	Test Voltage	By PoE

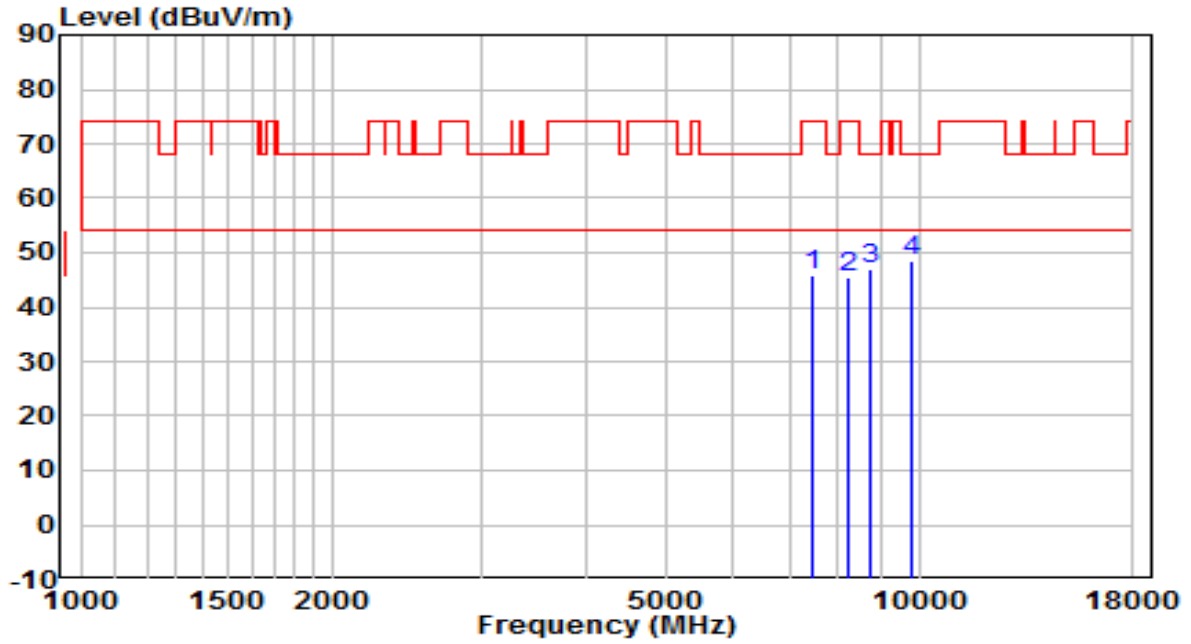


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7468.500	33.03	12.88	45.90	-28.10	74.00	Peak
2	8233.500	31.96	13.54	45.50	-28.50	74.00	Peak
3	8726.500	32.76	14.21	46.97	-21.23	68.20	Peak
4	* 9831.500	32.37	16.28	48.65	-19.55	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80+80 at Channel 5210+5290MHz	Test Voltage	By PoE

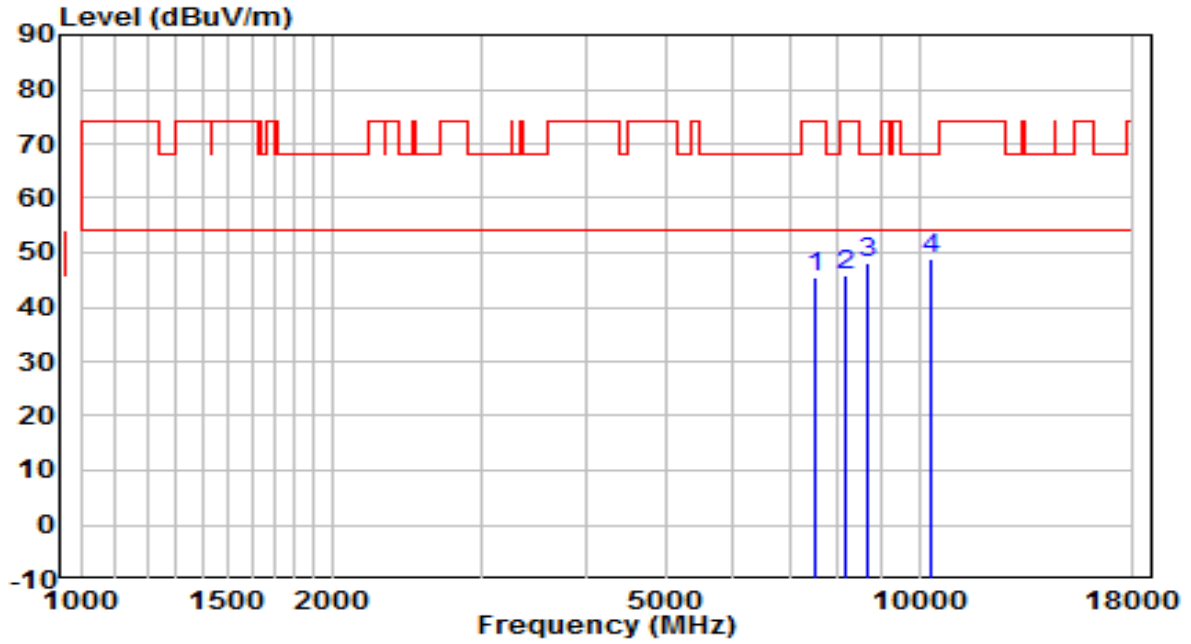


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7502.500	32.59	13.02	45.61	-28.39	74.00	Peak
2	8174.000	32.21	13.51	45.72	-28.28	74.00	Peak
3	8675.500	34.08	14.08	48.16	-20.04	68.20	Peak
4	* 10316.000	30.98	17.83	48.81	-19.39	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80+80 at Channel 5530+5610MHz	Test Voltage	By PoE

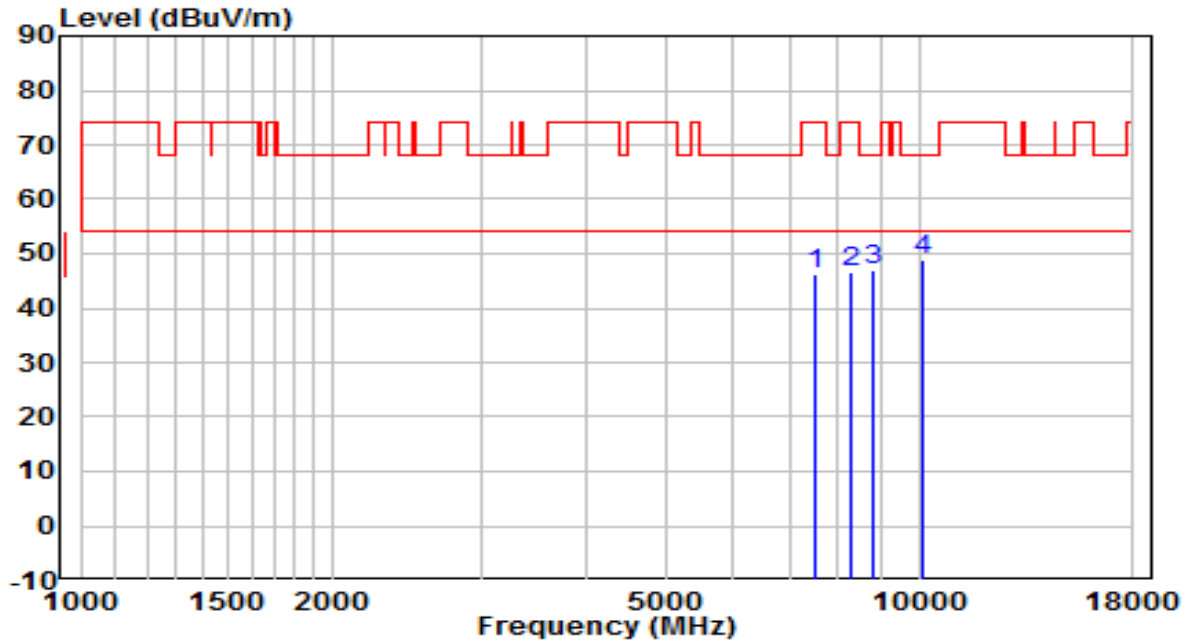


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7502.500	33.17	13.02	46.18	-27.82	74.00	Peak
2	8318.500	32.95	13.57	46.52	-27.48	74.00	Peak
3	8820.000	32.64	14.44	47.08	-21.12	68.20	Peak
4	* 10129.000	31.79	17.08	48.87	-19.33	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80+80 at Channel 5530+5610MHz	Test Voltage	By PoE

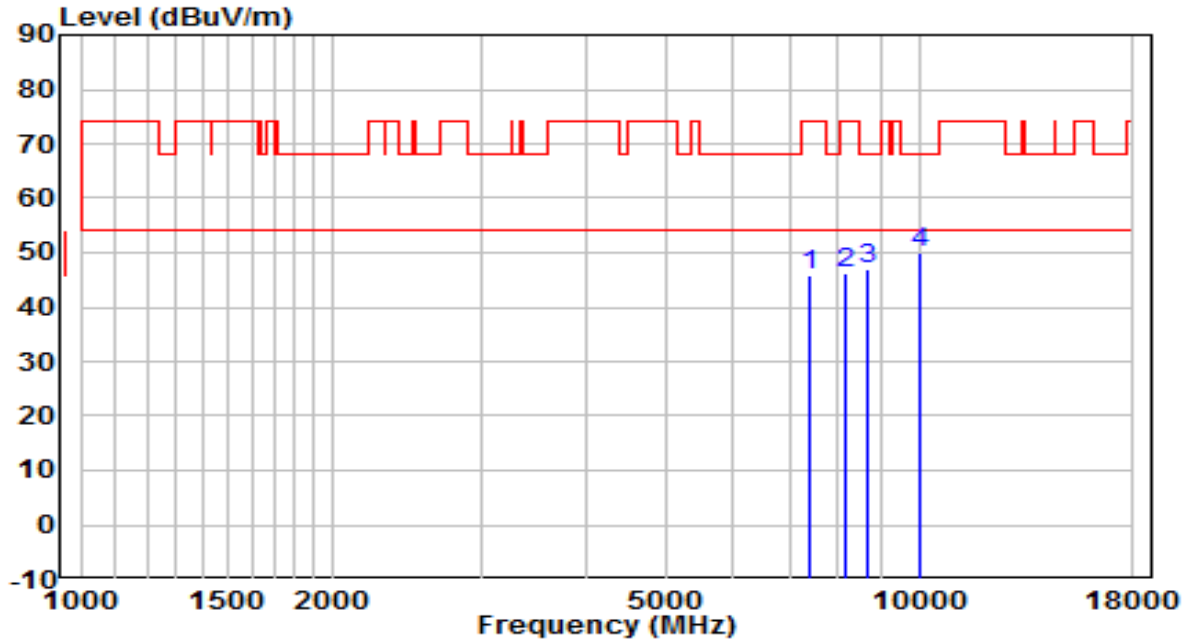


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7409.000	33.22	12.61	45.83	-28.17	74.00	Peak
2	8191.000	32.63	13.52	46.14	-27.86	74.00	Peak
3	8658.500	32.99	14.04	47.03	-21.17	68.20	Peak
4	* 10018.500	33.22	16.63	49.85	-18.35	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz	Test Voltage	By PoE

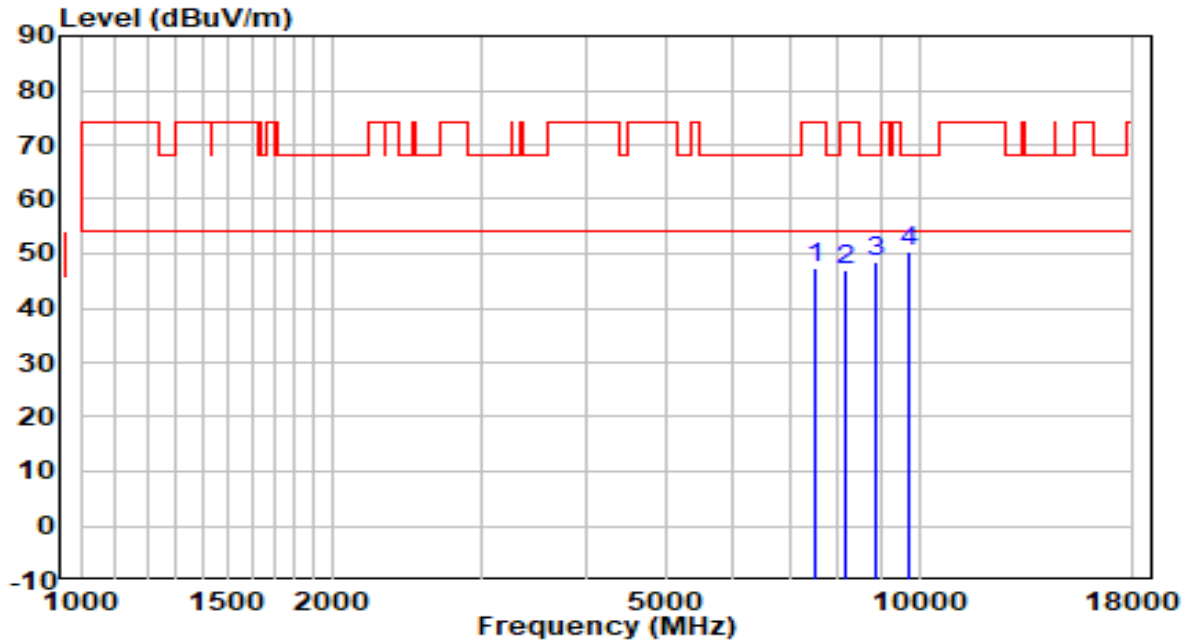


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7536.500	34.13	13.05	47.18	-26.82	74.00	Peak
2	8165.500	33.30	13.50	46.80	-27.20	74.00	Peak
3	8862.500	33.85	14.54	48.40	-19.80	68.20	Peak
4	* 9729.500	34.32	16.11	50.42	-17.78	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz	Test Voltage	By PoE

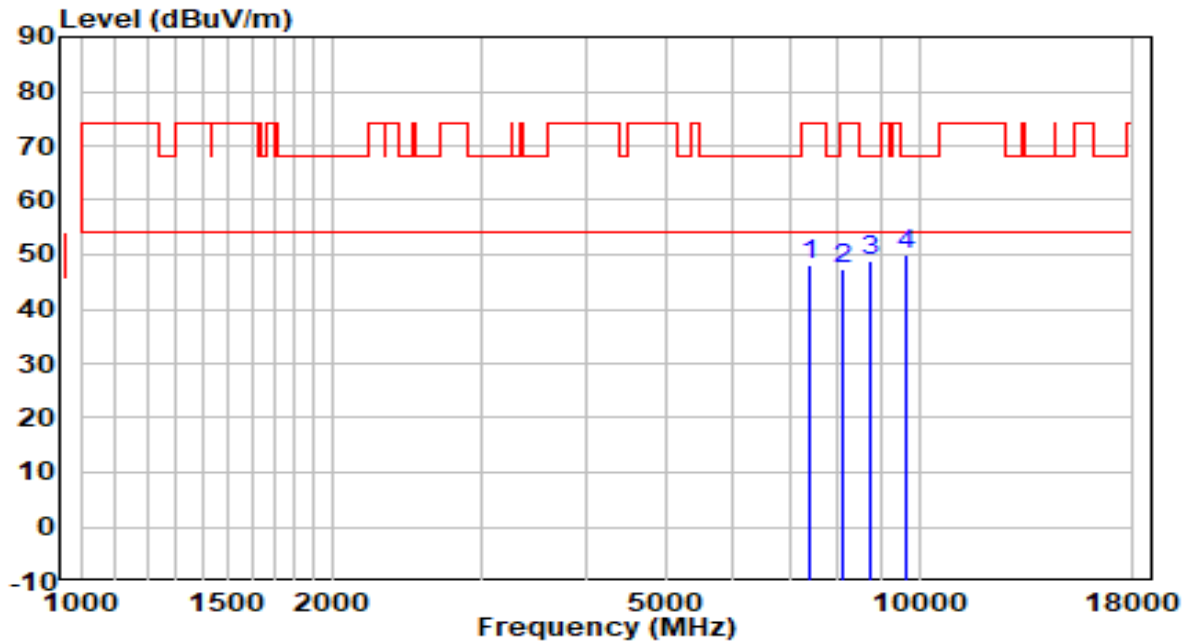


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7409.000	35.38	12.61	47.99	-26.01	74.00	Peak
2	8097.500	34.03	13.47	47.50	-26.50	74.00	Peak
3	8760.500	34.69	14.29	48.98	-19.22	68.20	Peak
4	* 9678.500	34.09	16.02	50.11	-18.09	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5220MHz	Test Voltage	By PoE

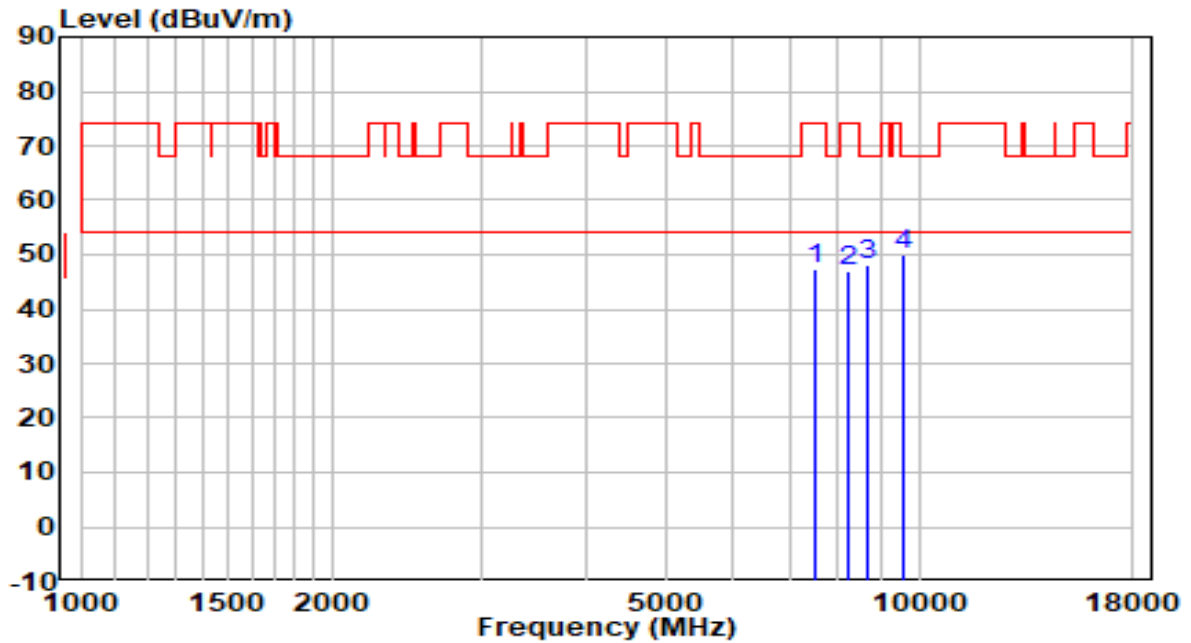


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7511.000	34.17	13.02	47.19	-26.81	74.00	Peak
2	8233.500	33.39	13.54	46.93	-27.07	74.00	Peak
3	8650.000	34.14	14.02	48.16	-20.04	68.20	Peak
4	* 9585.000	34.27	15.86	50.13	-18.07	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5220MHz	Test Voltage	By PoE

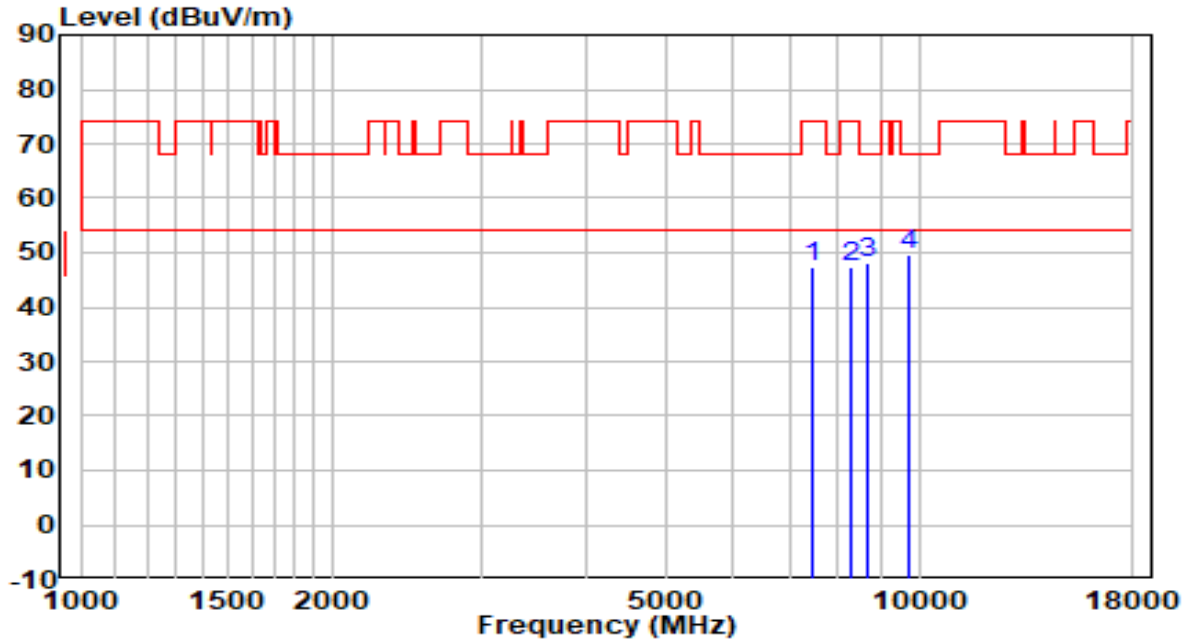


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7477.000	34.27	12.91	47.19	-26.81	74.00	Peak
2	8318.500	33.67	13.57	47.24	-26.76	74.00	Peak
3	8692.500	33.88	14.13	48.00	-20.20	68.20	Peak
4	* 9729.500	33.36	16.11	49.46	-18.74	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5240MHz	Test Voltage	By PoE

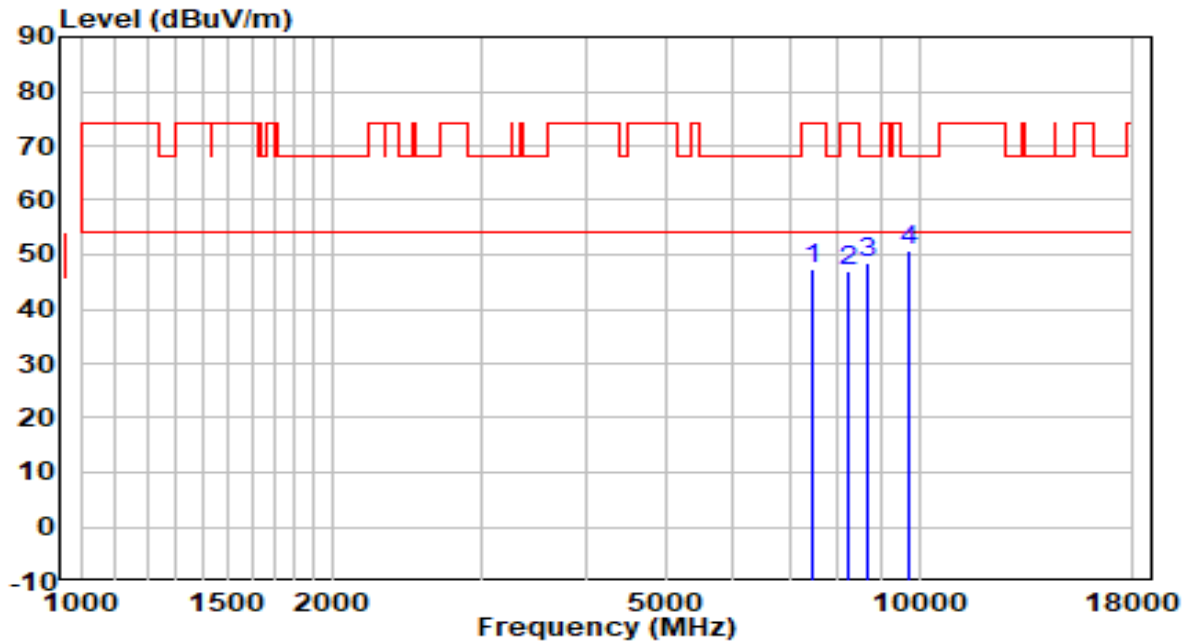


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7434.500	34.74	12.72	47.47	-26.53	74.00	Peak
2	8225.000	33.60	13.53	47.13	-26.87	74.00	Peak
3	8658.500	34.39	14.04	48.43	-19.77	68.20	Peak
4	* 9721.000	34.79	16.09	50.89	-17.31	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5240MHz	Test Voltage	By PoE

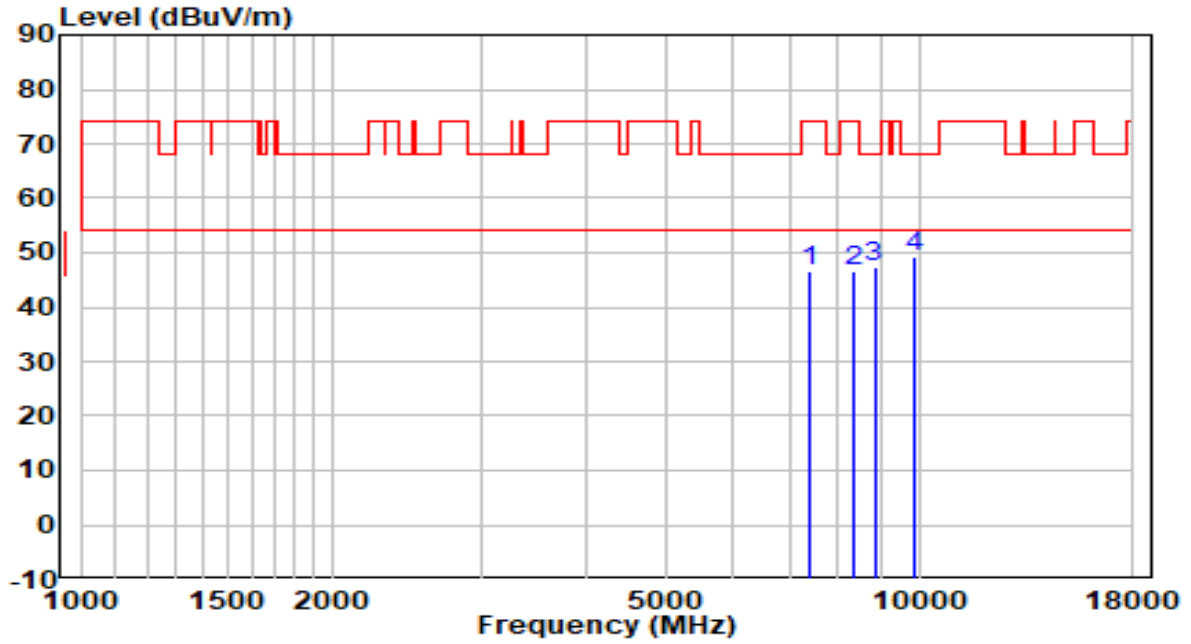


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7392.000	34.22	12.54	46.76	-27.24	74.00	Peak
2	8327.000	33.07	13.58	46.65	-27.35	74.00	Peak
3	8845.500	32.99	14.50	47.49	-20.71	68.20	Peak
4	* 9891.000	32.89	16.38	49.27	-18.93	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5260MHz	Test Voltage	By PoE

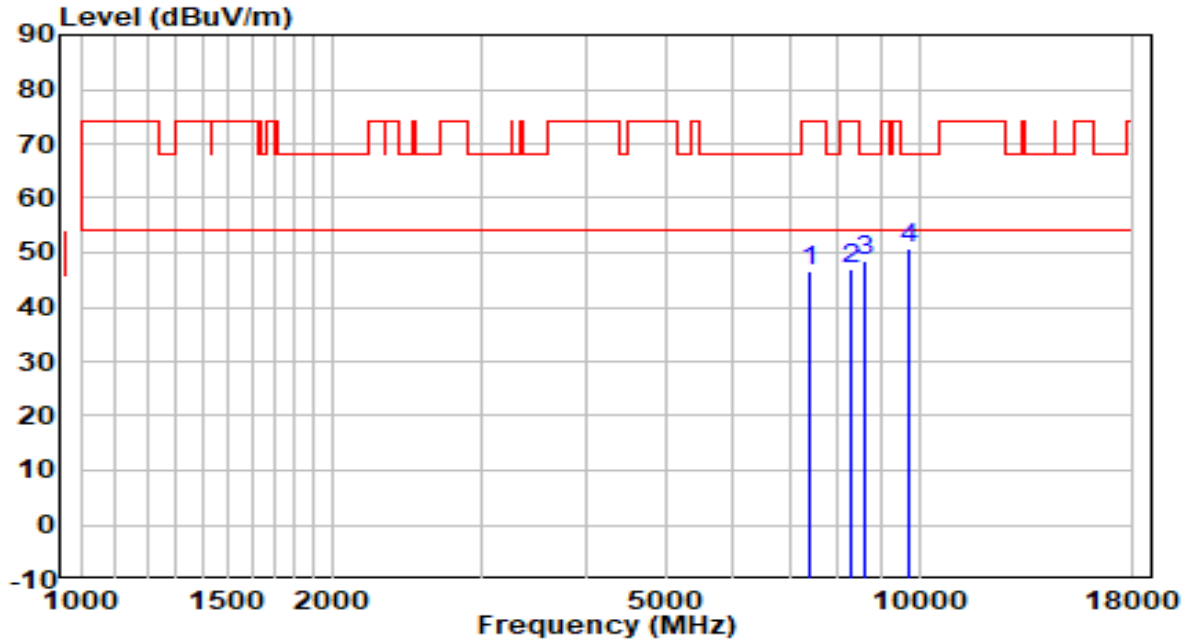


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7409.000	34.13	12.61	46.74	-27.26	74.00	Peak
2	8293.000	33.27	13.56	46.83	-27.17	74.00	Peak
3	8641.500	34.35	14.00	48.35	-19.85	68.20	Peak
4	* 9746.500	34.58	16.13	50.71	-17.49	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5260MHz	Test Voltage	By PoE

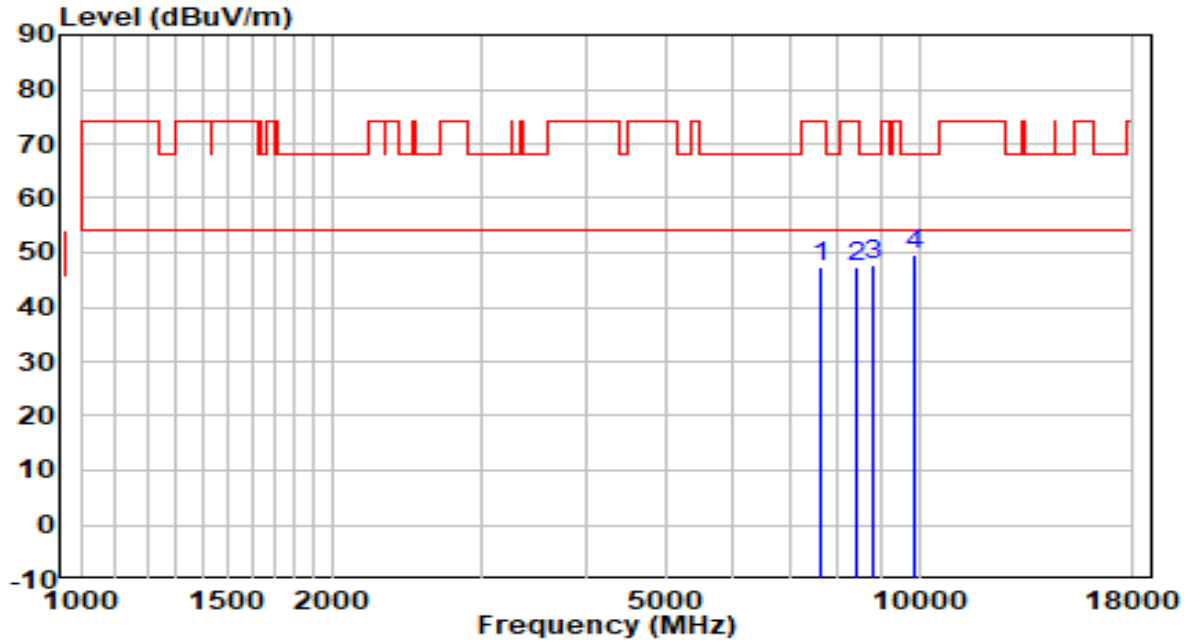


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7630.000	34.17	13.12	47.29	-26.71	74.00	Peak
2	8420.500	33.74	13.62	47.36	-26.64	74.00	Peak
3	8837.000	33.29	14.48	47.77	-20.43	68.20	Peak
4	* 9899.500	33.36	16.39	49.75	-18.45	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	By PoE

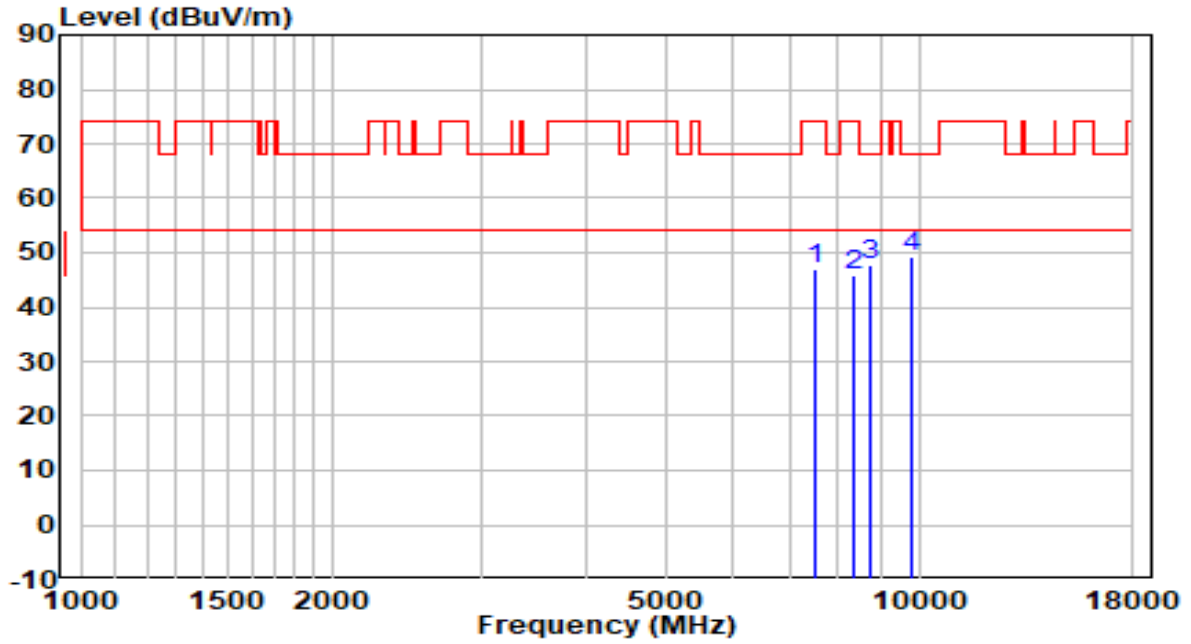


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7511.000	33.83	13.02	46.85	-27.15	74.00	Peak
2	8344.000	32.33	13.58	45.91	-28.09	74.00	Peak
3	8718.000	33.54	14.19	47.73	-20.47	68.20	Peak
4	* 9797.500	33.16	16.22	49.38	-18.82	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	By PoE

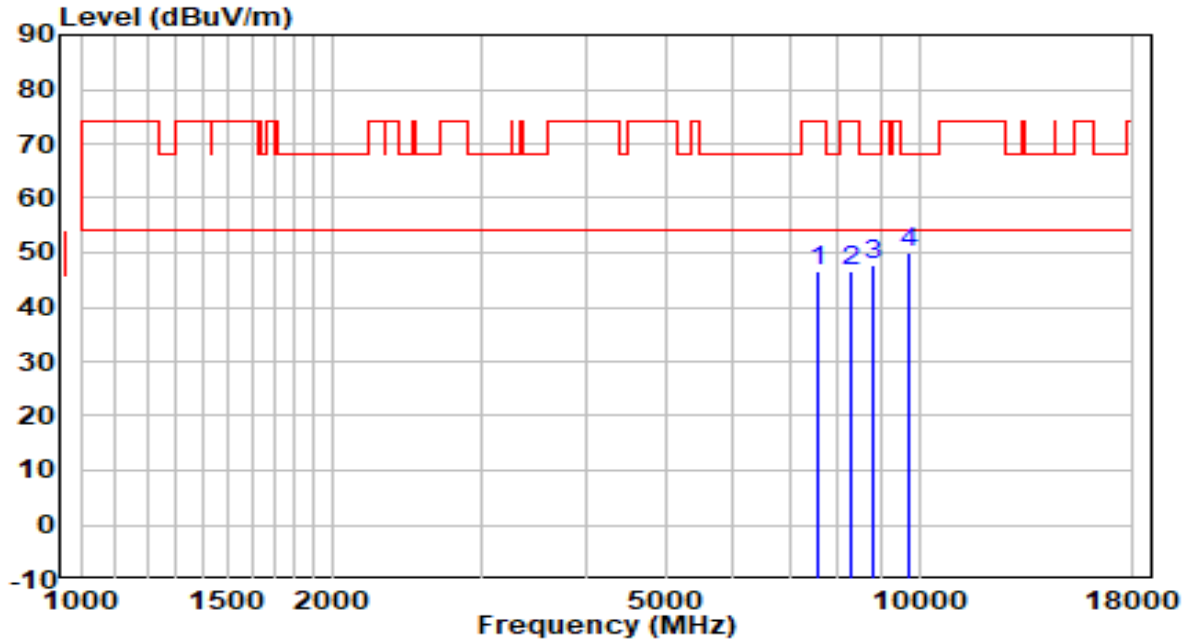


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7570.500	33.58	13.07	46.65	-27.35	74.00	Peak
2	8284.500	32.97	13.56	46.53	-27.47	74.00	Peak
3	8837.000	33.44	14.48	47.92	-20.28	68.20	Peak
4	* 9738.000	33.86	16.12	49.98	-18.22	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz	Test Voltage	By PoE

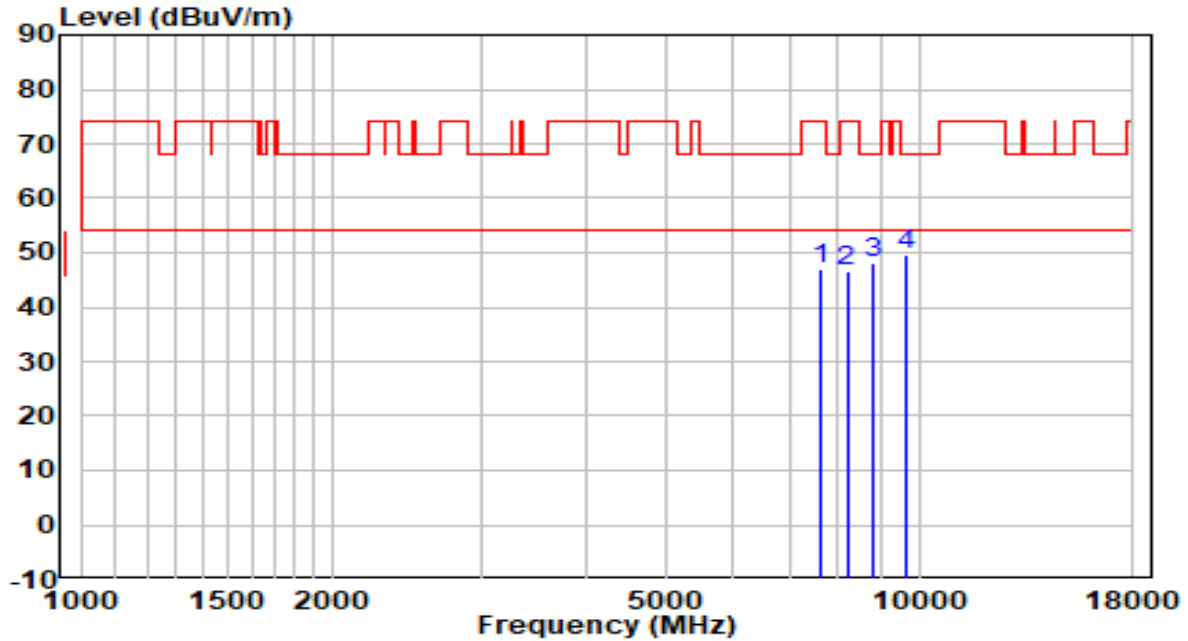


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7630.000	34.03	13.12	47.15	-26.85	74.00	Peak
2	8199.500	33.04	13.52	46.56	-27.44	74.00	Peak
3	8794.500	33.90	14.38	48.28	-19.92	68.20	Peak
4	* 9653.000	33.78	15.98	49.75	-18.45	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz	Test Voltage	By PoE

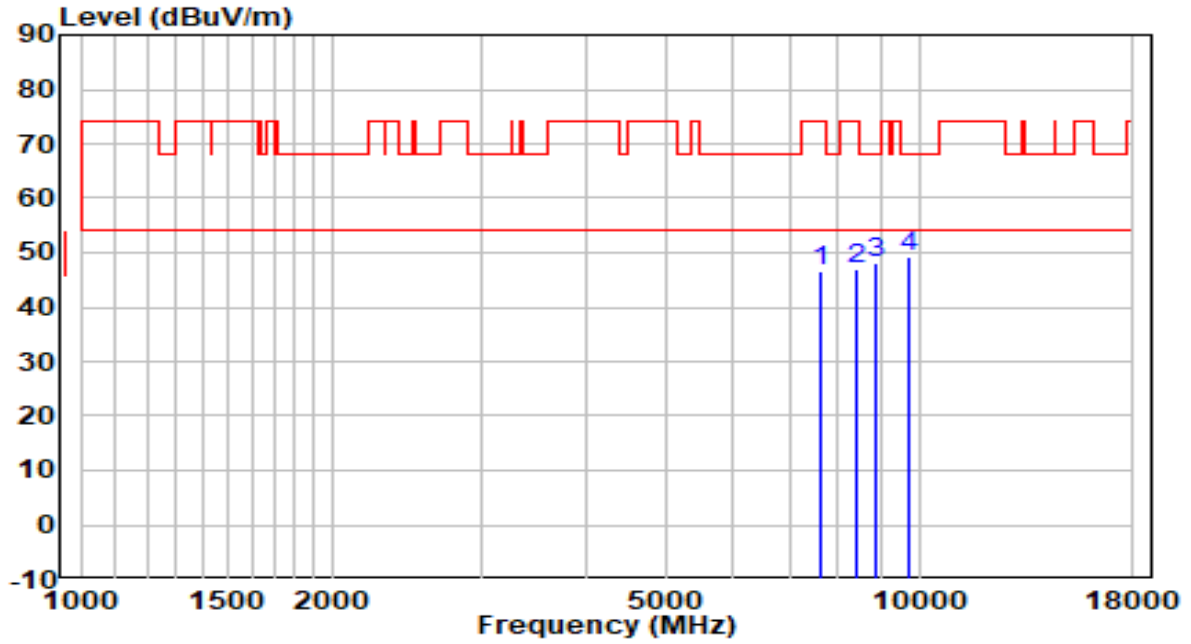


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7630.000	33.59	13.12	46.71	-27.29	74.00	Peak
2	8403.500	33.41	13.61	47.02	-26.98	74.00	Peak
3	8871.000	33.54	14.56	48.11	-20.09	68.20	Peak
4	* 9746.500	33.16	16.13	49.29	-18.91	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5580MHz	Test Voltage	By PoE

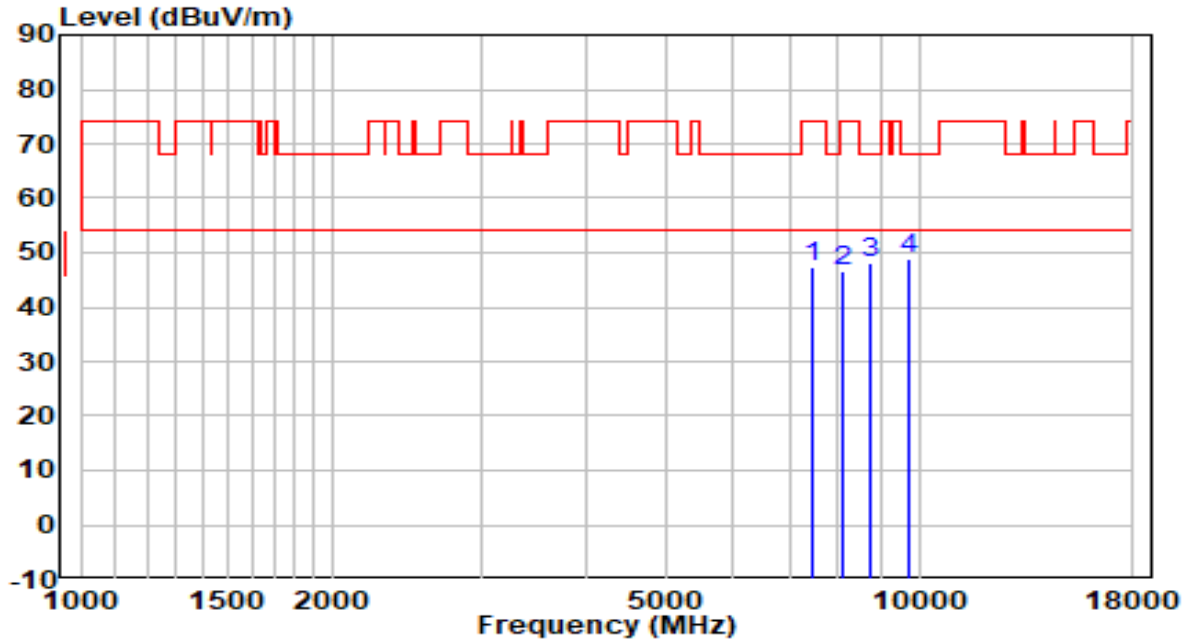


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7477.000	34.58	12.91	47.49	-26.51	74.00	Peak
2	8123.000	33.08	13.49	46.56	-27.44	74.00	Peak
3	8769.000	33.84	14.31	48.16	-20.04	68.20	Peak
4	* 9755.000	32.90	16.15	49.04	-19.16	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5580MHz	Test Voltage	By PoE

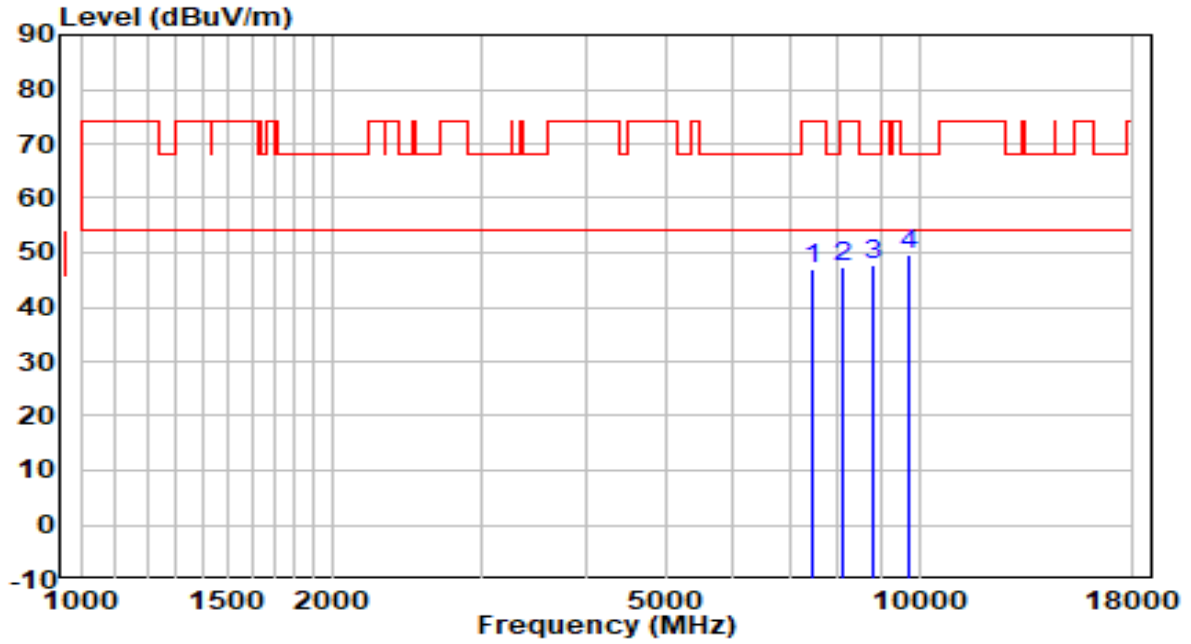


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7460.000	34.26	12.84	47.09	-26.91	74.00	Peak
2	8123.000	33.95	13.49	47.43	-26.57	74.00	Peak
3	8828.500	33.13	14.46	47.59	-20.61	68.20	Peak
4	* 9704.000	33.53	16.06	49.59	-18.61	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	By PoE

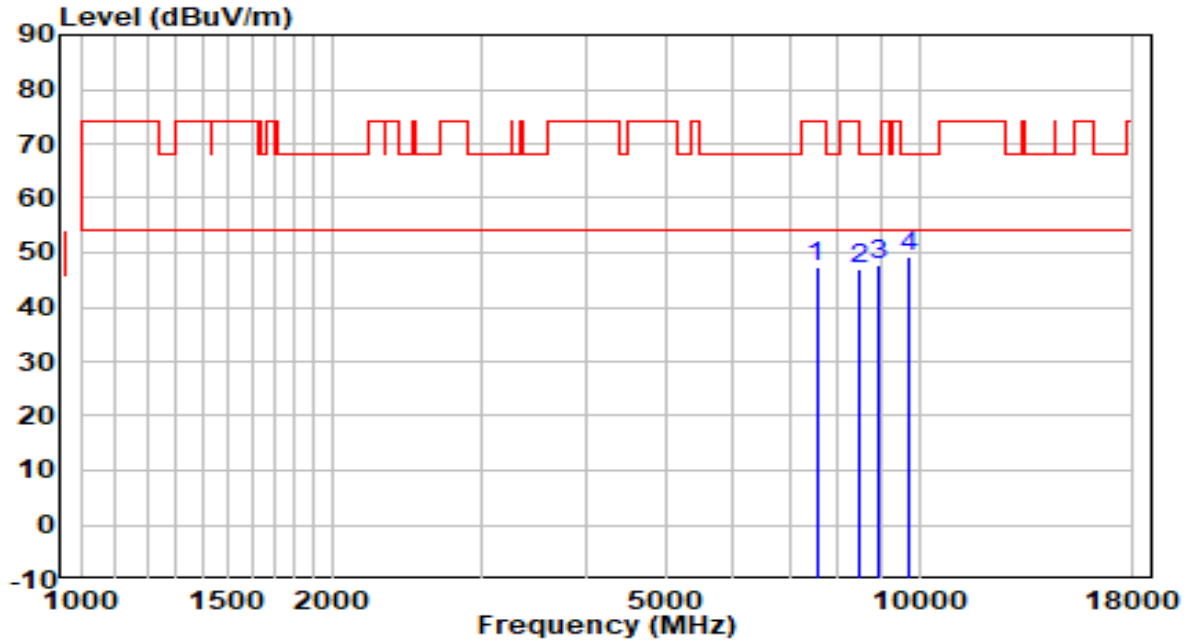


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7545.000	34.16	13.05	47.21	-26.79	74.00	Peak
2	8463.000	33.38	13.64	47.02	-26.98	74.00	Peak
3	8930.500	32.98	14.71	47.69	-20.51	68.20	Peak
4	* 9721.000	33.33	16.09	49.42	-18.78	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	By PoE

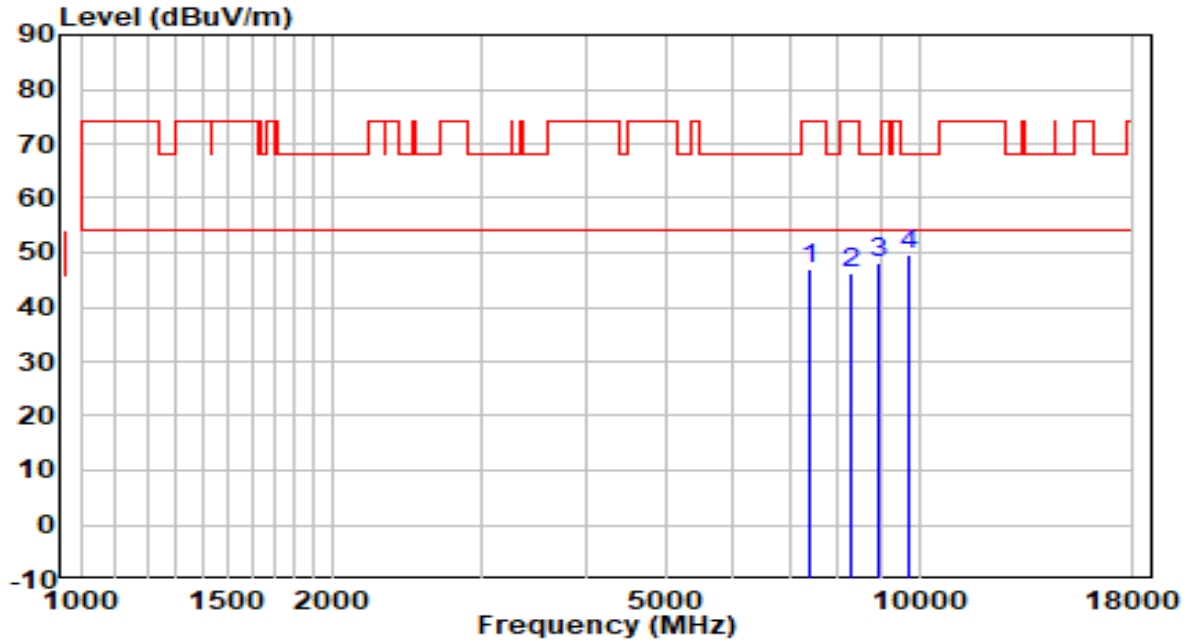


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7392.000	34.53	12.54	47.07	-26.93	74.00	Peak
2	8318.500	32.70	13.57	46.27	-27.73	74.00	Peak
3	8913.500	33.48	14.67	48.15	-20.05	68.20	Peak
4	* 9704.000	33.49	16.06	49.55	-18.65	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5720MHz	Test Voltage	By PoE

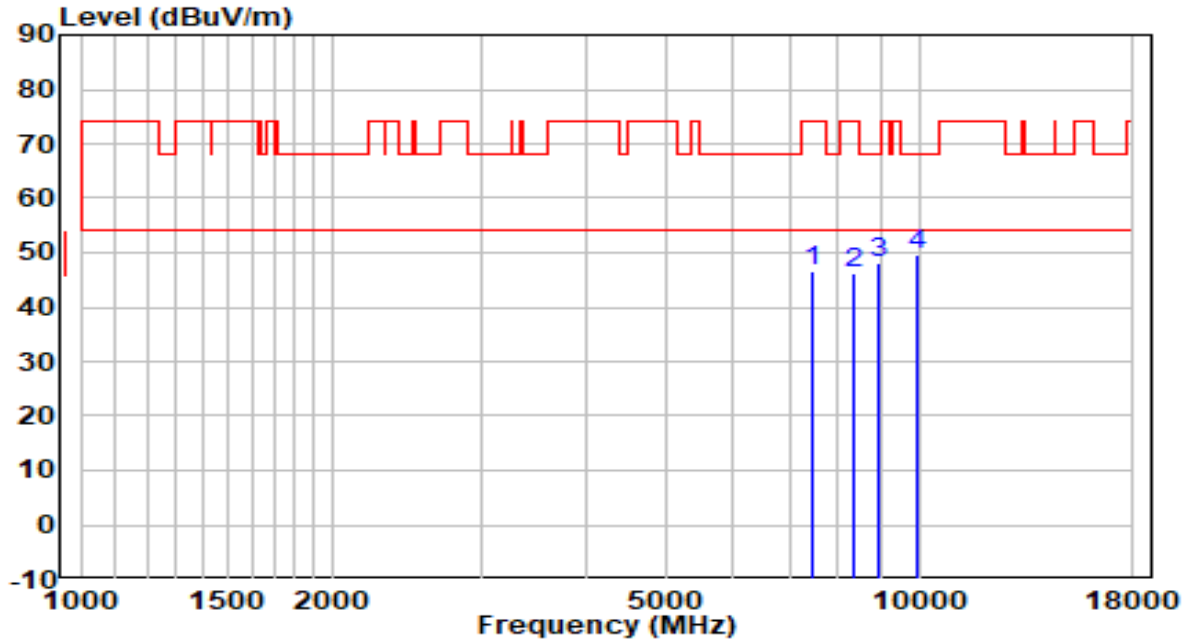


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7477.000	33.66	12.91	46.57	-27.43	74.00	Peak
2	8327.000	32.49	13.58	46.07	-27.93	74.00	Peak
3	8947.500	33.40	14.75	48.15	-20.05	68.20	Peak
4	* 9916.500	33.37	16.42	49.78	-18.42	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5720MHz	Test Voltage	By PoE

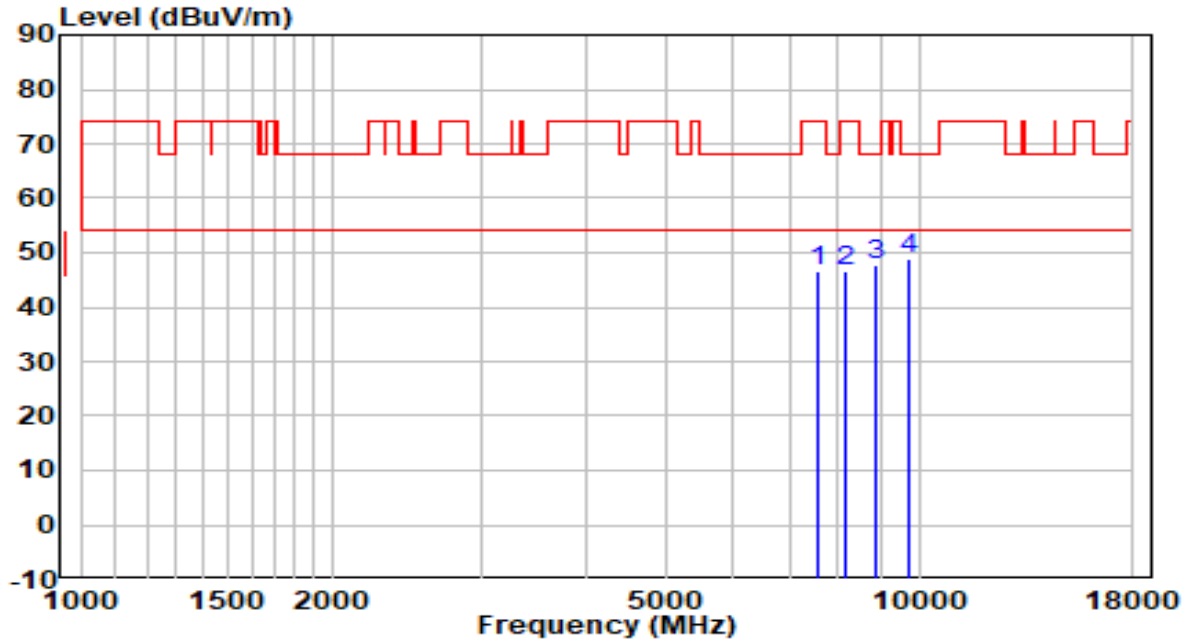


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7570.500	33.57	13.07	46.65	-27.35	74.00	Peak
2	8191.000	33.09	13.52	46.61	-27.39	74.00	Peak
3	8854.000	33.26	14.52	47.79	-20.41	68.20	Peak
4	* 9729.500	32.80	16.11	48.91	-19.29	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5745MHz	Test Voltage	By PoE

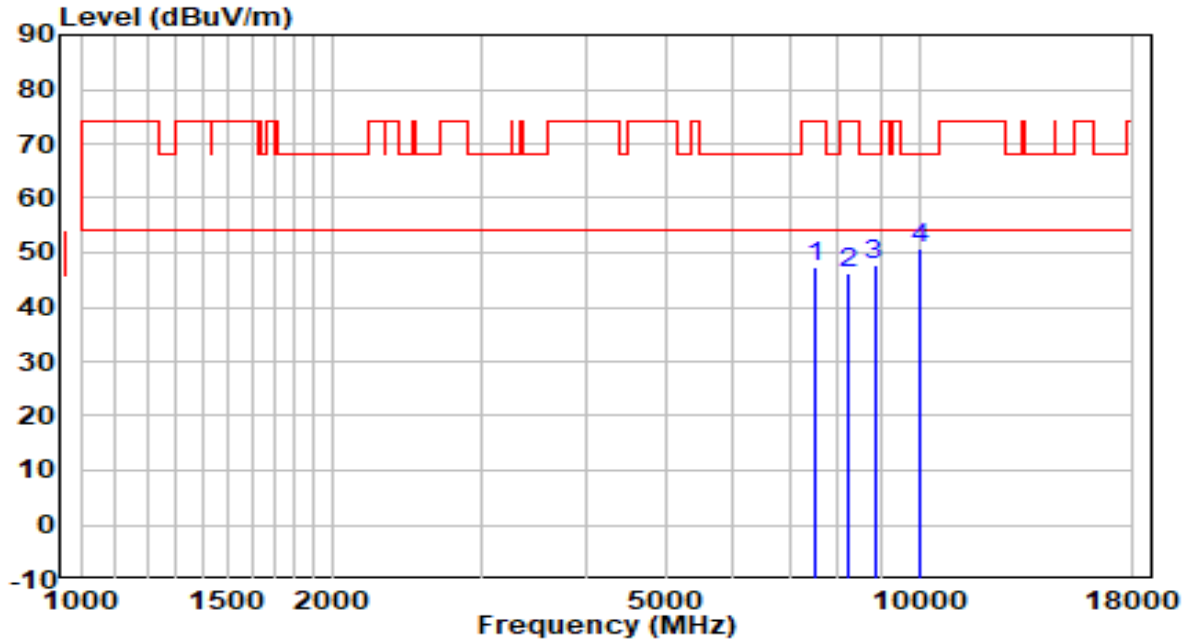


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7528.000	34.38	13.04	47.42	-26.58	74.00	Peak
2	8216.500	32.54	13.53	46.07	-27.93	74.00	Peak
3	8845.500	33.14	14.50	47.64	-20.56	68.20	Peak
4	* 10001.500	34.34	16.57	50.91	-17.29	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5745MHz	Test Voltage	By PoE

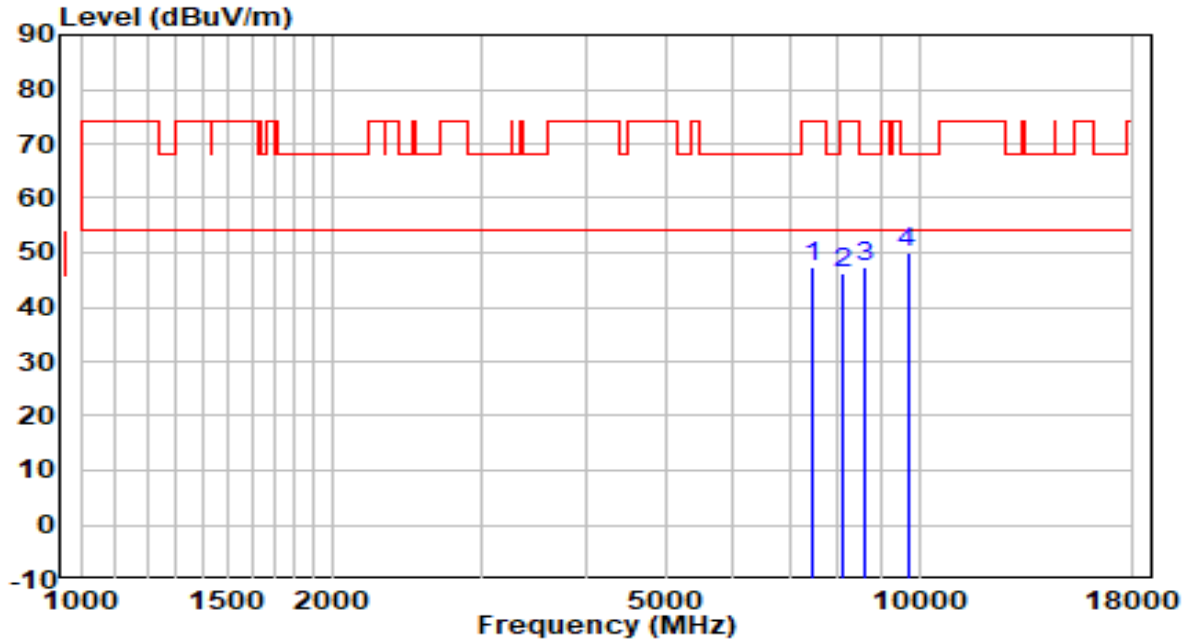


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7477.000	34.32	12.91	47.24	-26.76	74.00	Peak
2	8106.000	32.59	13.48	46.06	-27.94	74.00	Peak
3	8624.500	33.33	13.96	47.29	-20.91	68.20	Peak
4	* 9687.000	34.04	16.03	50.07	-18.13	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5785MHz	Test Voltage	By PoE

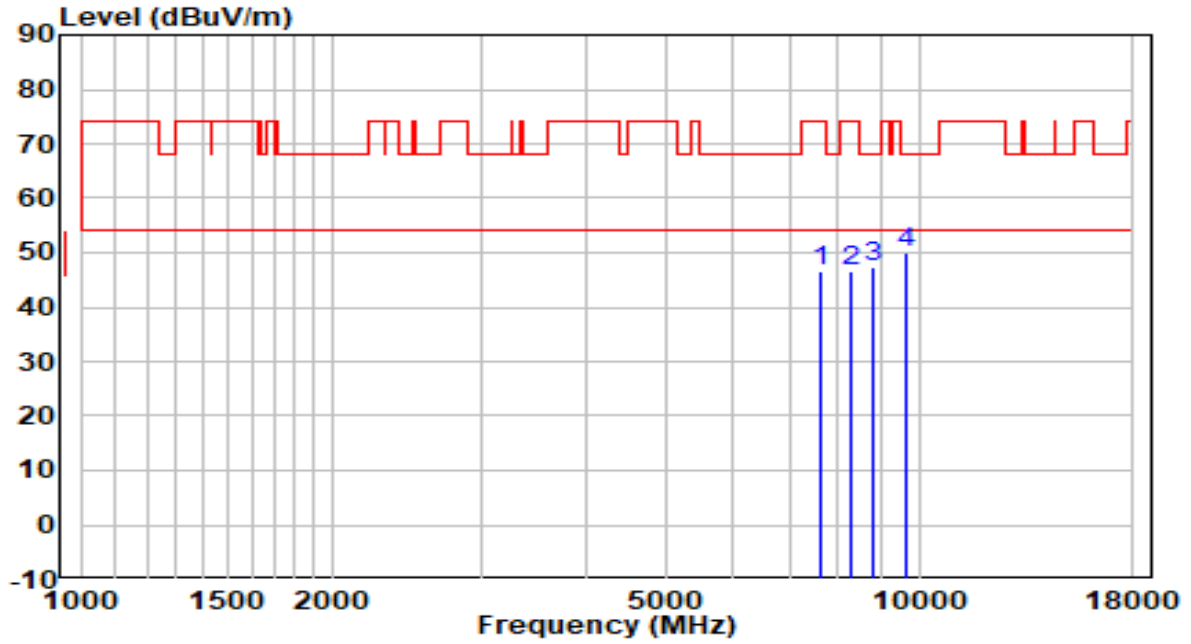


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7621.500	33.50	13.12	46.62	-27.38	74.00	Peak
2	8310.000	33.09	13.57	46.66	-27.34	74.00	Peak
3	8828.500	32.90	14.46	47.36	-20.84	68.20	Peak
4	* 9678.500	33.86	16.02	49.88	-18.32	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5785MHz	Test Voltage	By PoE

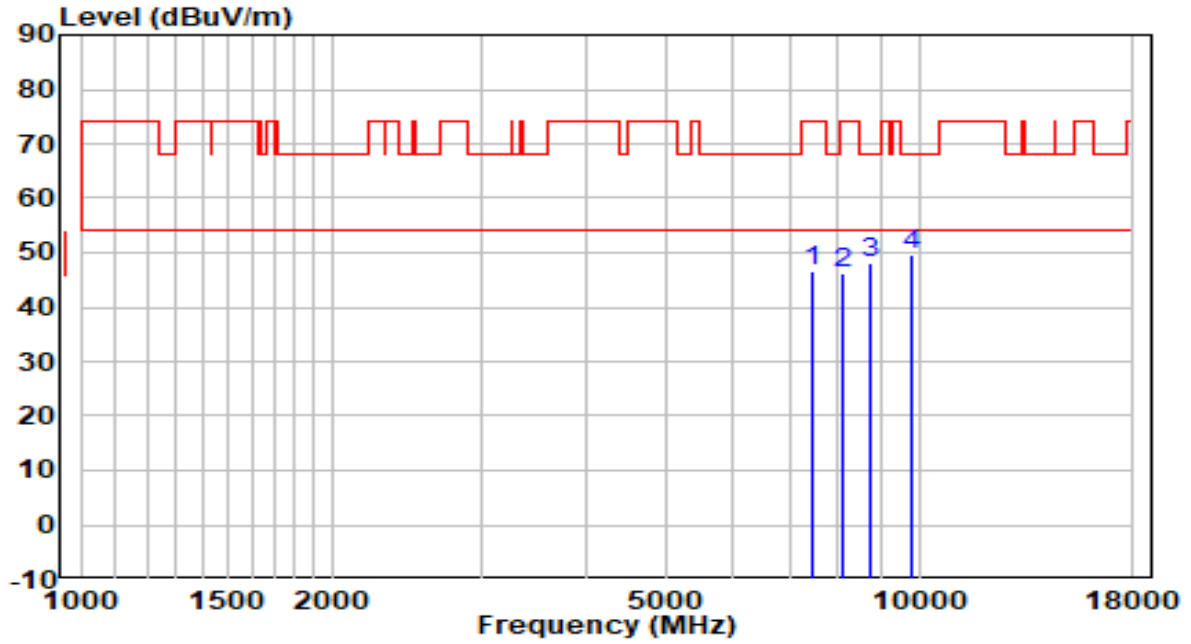


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7443.000	33.79	12.76	46.55	-27.45	74.00	Peak
2	8106.000	32.75	13.48	46.23	-27.77	74.00	Peak
3	8718.000	33.80	14.19	47.99	-20.21	68.20	Peak
4	* 9797.500	33.28	16.22	49.50	-18.70	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5825MHz	Test Voltage	By PoE

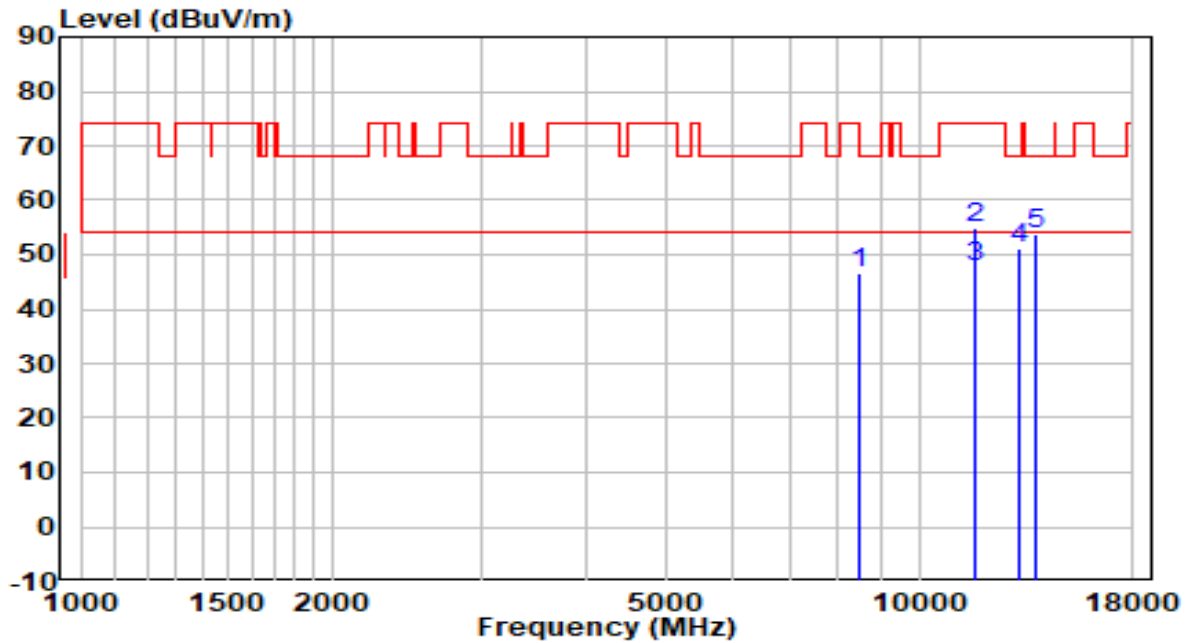


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8463.000	32.86	13.64	46.50	-27.50	74.00	Peak
2	11650.500	35.31	19.71	55.02	-18.98	74.00	Peak
3	* 11650.500	28.18	19.71	47.89	-6.11	54.00	Average
4	13138.000	30.72	20.43	51.16	-17.04	68.20	Peak
5	13792.500	31.52	22.19	53.70	-14.50	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5825MHz	Test Voltage	By PoE

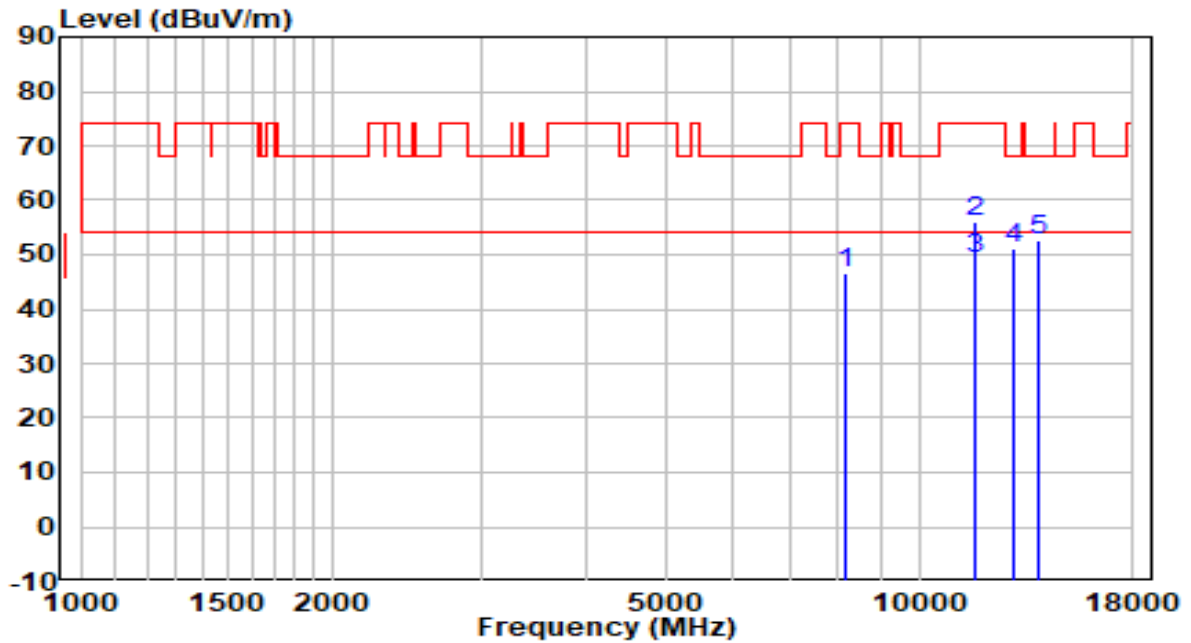


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8165.500	33.12	13.50	46.63	-27.37	74.00	Peak
2	11642.000	36.37	19.73	56.10	-17.90	74.00	Peak
3	* 11642.000	29.53	19.73	49.26	-4.74	54.00	Average
4	12993.500	31.16	19.87	51.03	-17.17	68.20	Peak
5	13860.500	30.38	22.26	52.65	-15.55	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	By PoE

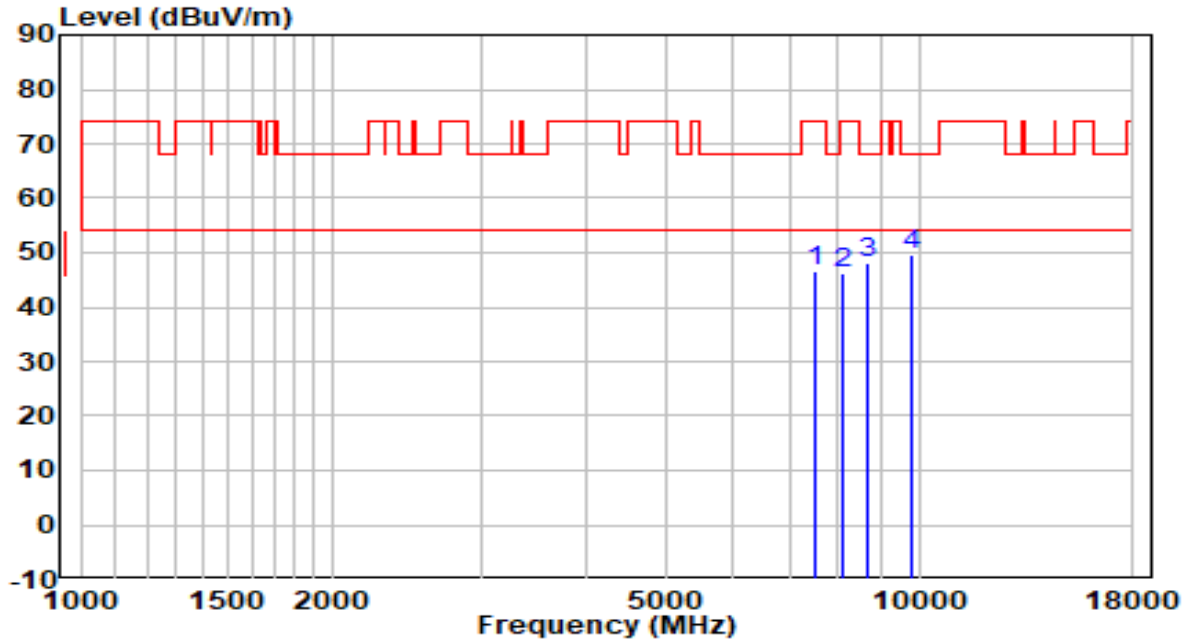


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7494.000	33.72	12.99	46.71	-27.29	74.00	Peak
2	8089.000	32.67	13.47	46.14	-27.86	74.00	Peak
3	8709.500	33.82	14.17	47.99	-20.21	68.20	Peak
4	* 9823.000	33.43	16.26	49.69	-18.51	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	By PoE

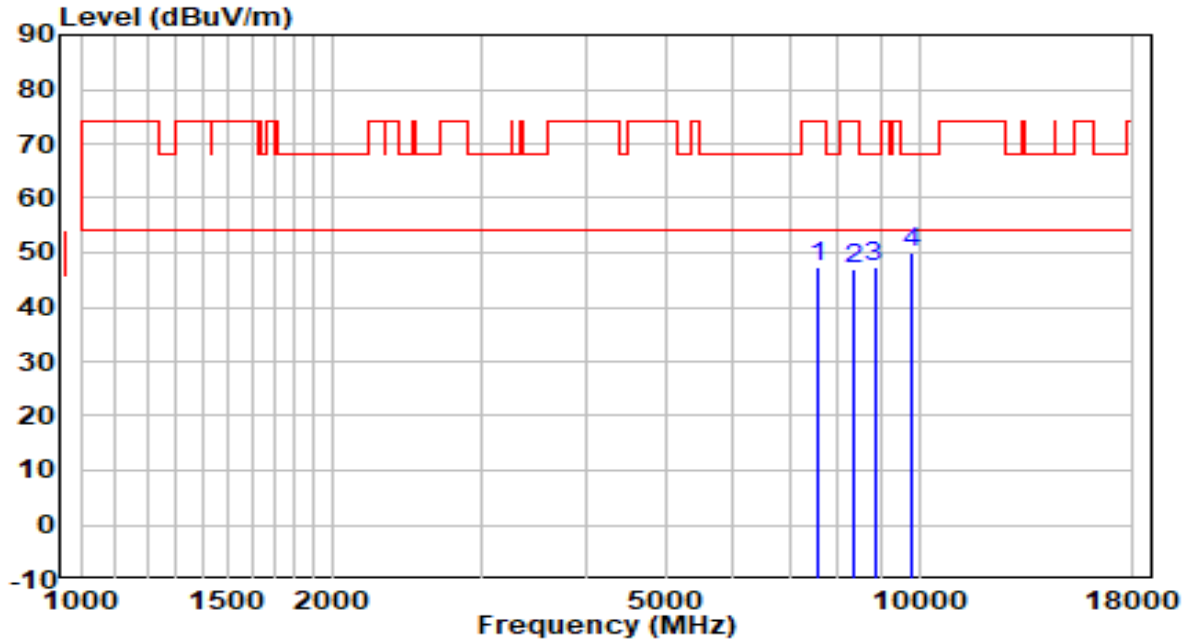


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7587.500	34.16	13.09	47.25	-26.75	74.00	Peak
2	8361.000	33.33	13.59	46.92	-27.08	74.00	Peak
3	8845.500	32.94	14.50	47.45	-20.75	68.20	Peak
4	* 9806.000	33.70	16.23	49.93	-18.27	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5230MHz	Test Voltage	By PoE

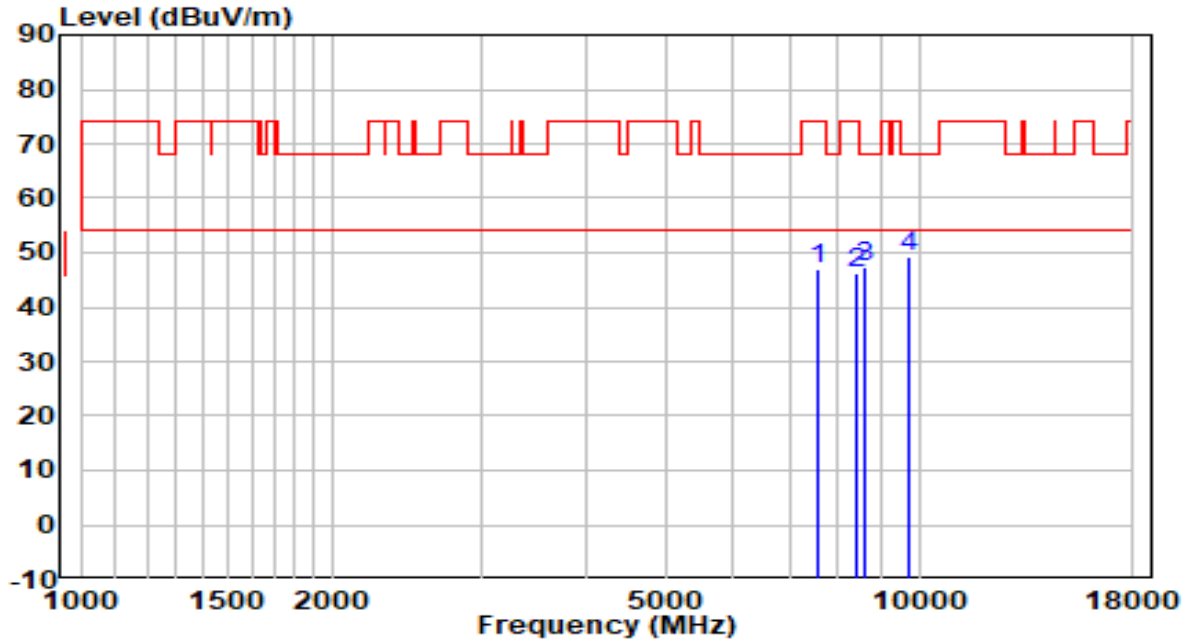


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7553.500	33.88	13.06	46.94	-27.06	74.00	Peak
2	8403.500	32.53	13.61	46.14	-27.86	74.00	Peak
3	8624.500	33.56	13.96	47.52	-20.68	68.20	Peak
4	* 9695.500	33.37	16.05	49.42	-18.78	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5230MHz	Test Voltage	By PoE

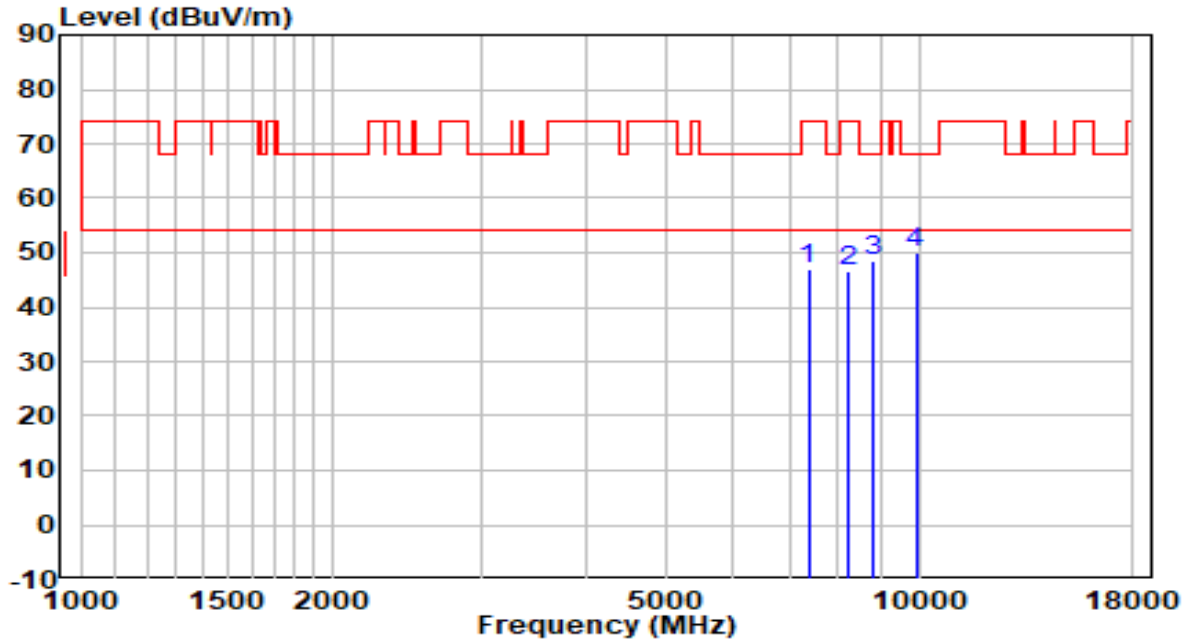


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7375.000	34.63	12.46	47.09	-26.91	74.00	Peak
2	8250.500	33.10	13.54	46.64	-27.36	74.00	Peak
3	8794.500	34.16	14.38	48.53	-19.67	68.20	Peak
4	* 9908.000	33.52	16.41	49.92	-18.28	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5270MHz	Test Voltage	By PoE

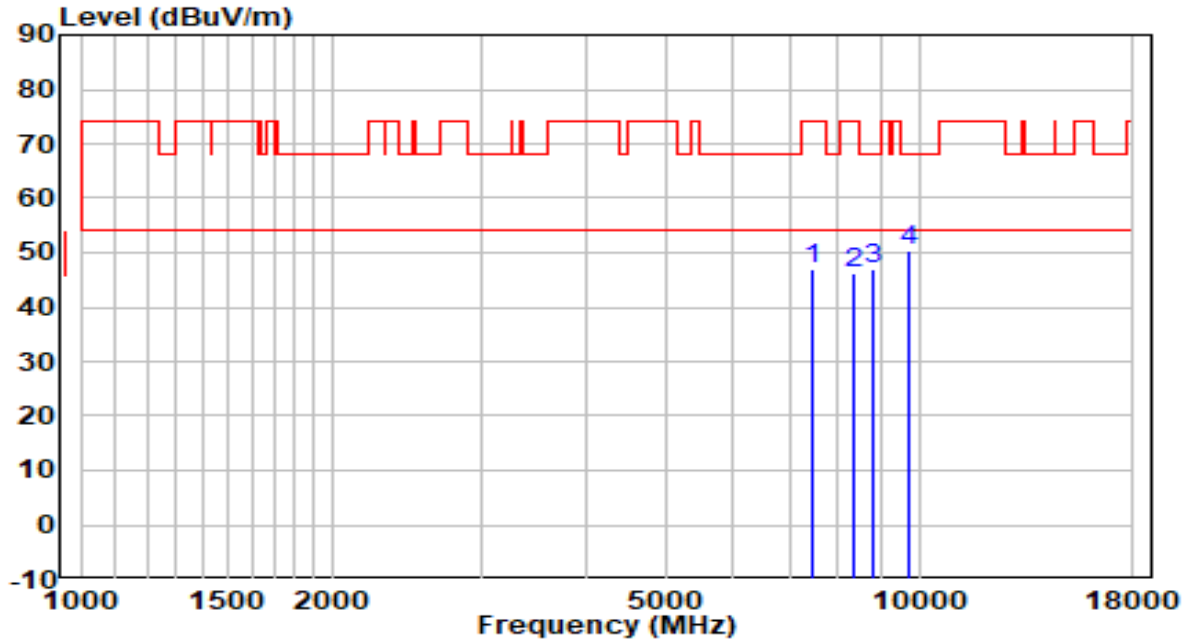


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7468.500	34.21	12.88	47.09	-26.91	74.00	Peak
2	8369.500	32.46	13.60	46.06	-27.94	74.00	Peak
3	8786.000	32.64	14.36	46.99	-21.21	68.20	Peak
4	* 9755.000	34.42	16.15	50.56	-17.64	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5270MHz	Test Voltage	By PoE

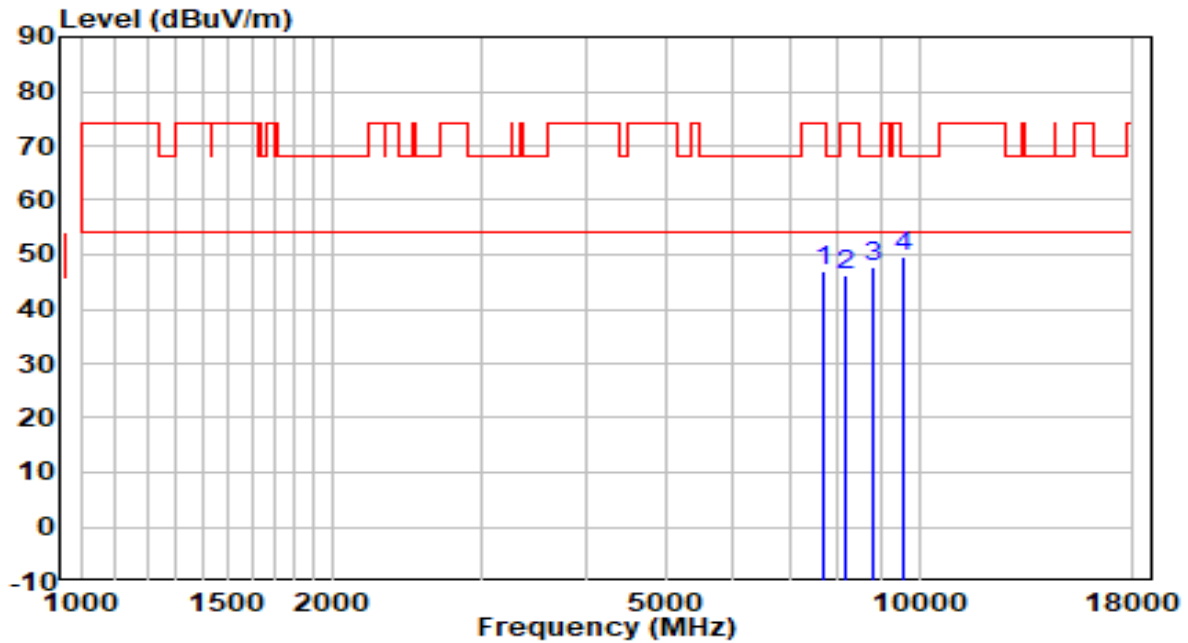


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7664.000	33.77	13.15	46.92	-27.08	74.00	Peak
2	8165.500	32.67	13.50	46.17	-27.83	74.00	Peak
3	8837.000	33.28	14.48	47.76	-20.44	68.20	Peak
4	* 9585.000	33.74	15.86	49.60	-18.60	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz	Test Voltage	By PoE

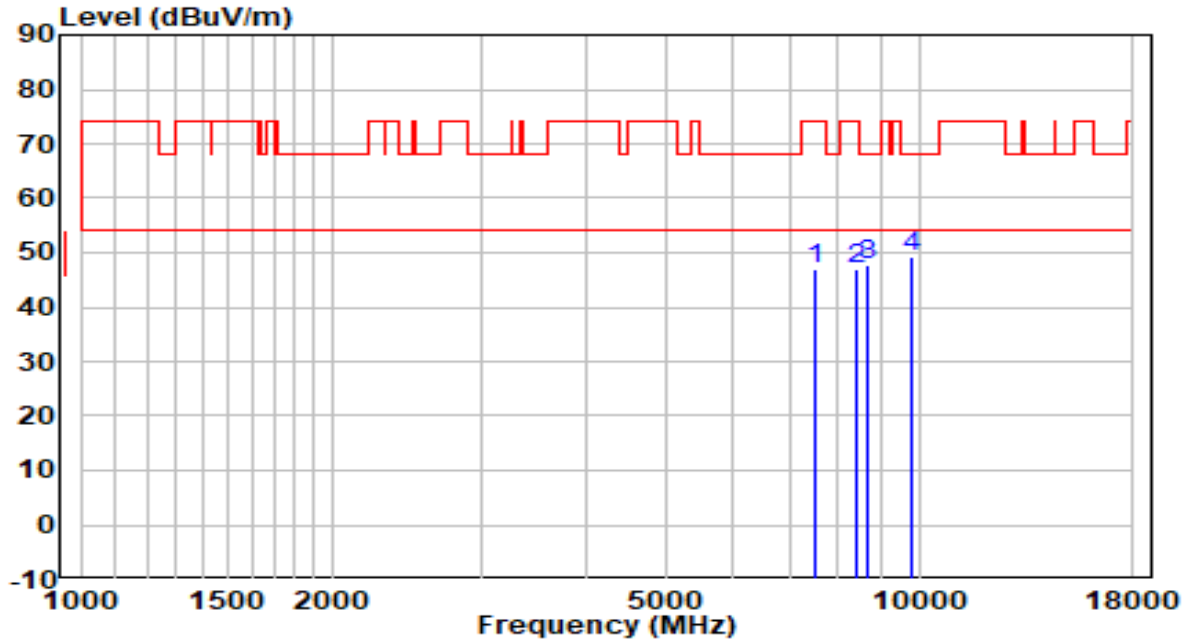


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7536.500	34.00	13.05	47.05	-26.95	74.00	Peak
2	8412.000	33.51	13.62	47.13	-26.87	74.00	Peak
3	8675.500	33.60	14.08	47.68	-20.52	68.20	Peak
4	* 9797.500	33.14	16.22	49.36	-18.84	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz	Test Voltage	By PoE

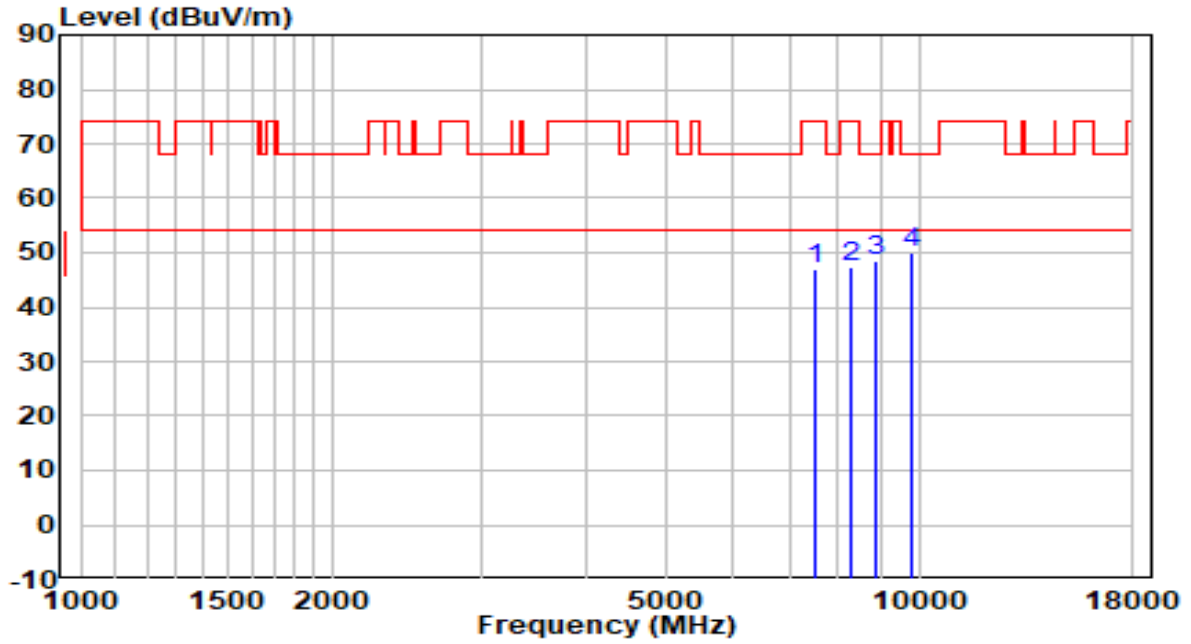


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7536.500	33.84	13.05	46.89	-27.11	74.00	Peak
2	8301.500	33.81	13.57	47.37	-26.63	74.00	Peak
3	8879.500	33.78	14.58	48.36	-19.84	68.20	Peak
4	* 9806.000	33.93	16.23	50.16	-18.04	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz	Test Voltage	By PoE

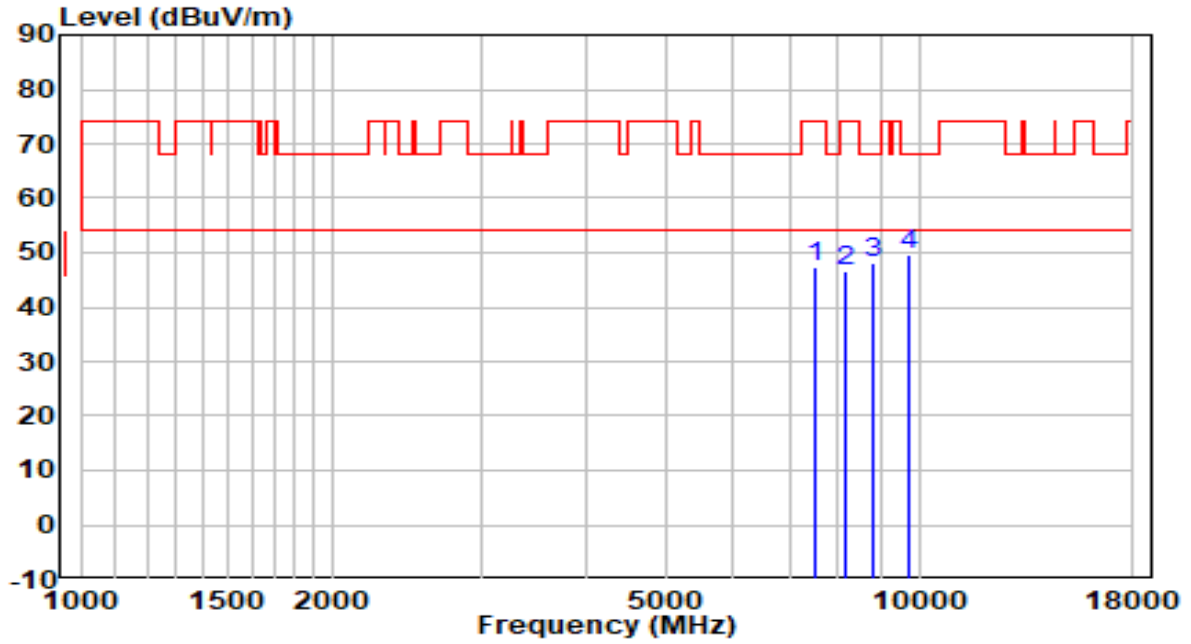


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7502.500	34.23	13.02	47.24	-26.76	74.00	Peak
2	8182.500	32.97	13.51	46.49	-27.51	74.00	Peak
3	8820.000	33.81	14.44	48.25	-19.95	68.20	Peak
4	* 9695.500	33.45	16.05	49.50	-18.70	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz	Test Voltage	By PoE

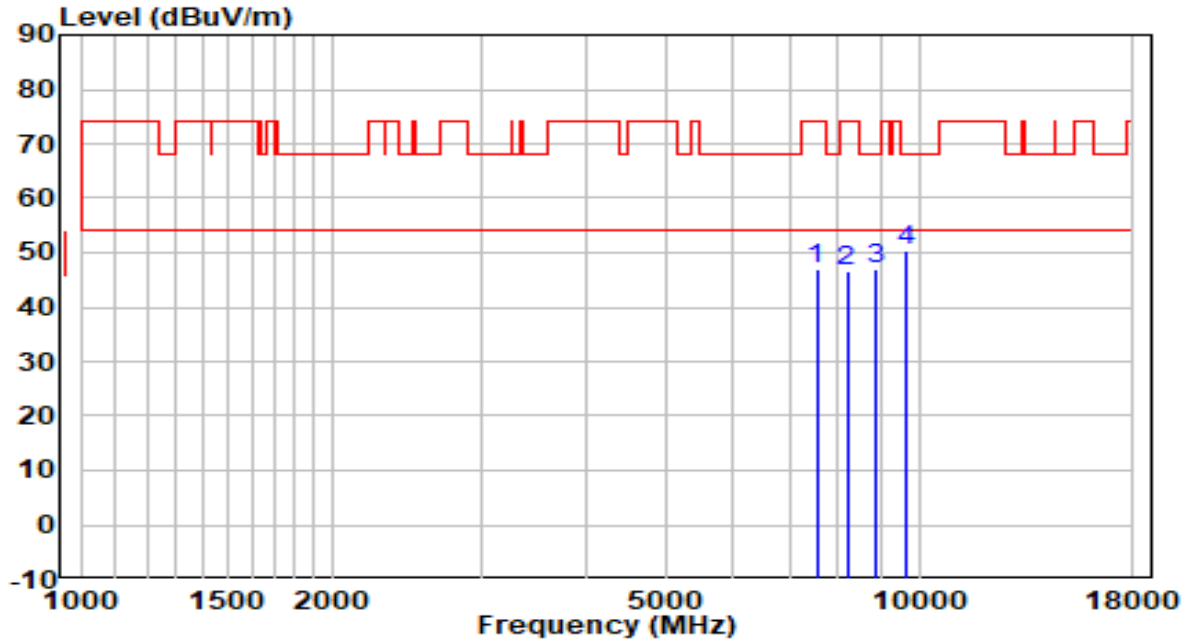


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7545.000	33.86	13.05	46.91	-27.09	74.00	Peak
2	8199.500	33.24	13.52	46.76	-27.24	74.00	Peak
3	8879.500	32.56	14.58	47.15	-21.05	68.20	Peak
4	* 9661.500	34.34	15.99	50.33	-17.87	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5550MHz	Test Voltage	By PoE

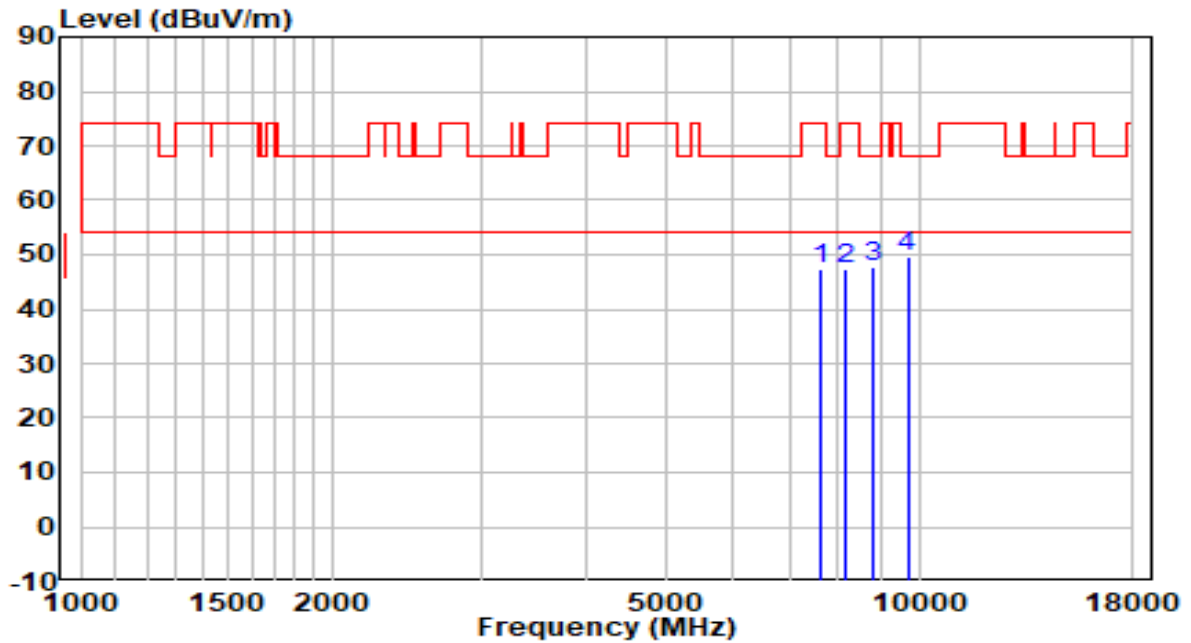


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7630.000	34.05	13.12	47.18	-26.82	74.00	Peak
2	8148.500	33.69	13.50	47.19	-26.81	74.00	Peak
3	8828.500	33.20	14.46	47.66	-20.54	68.20	Peak
4	* 9687.000	33.40	16.03	49.44	-18.76	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5550MHz	Test Voltage	By PoE

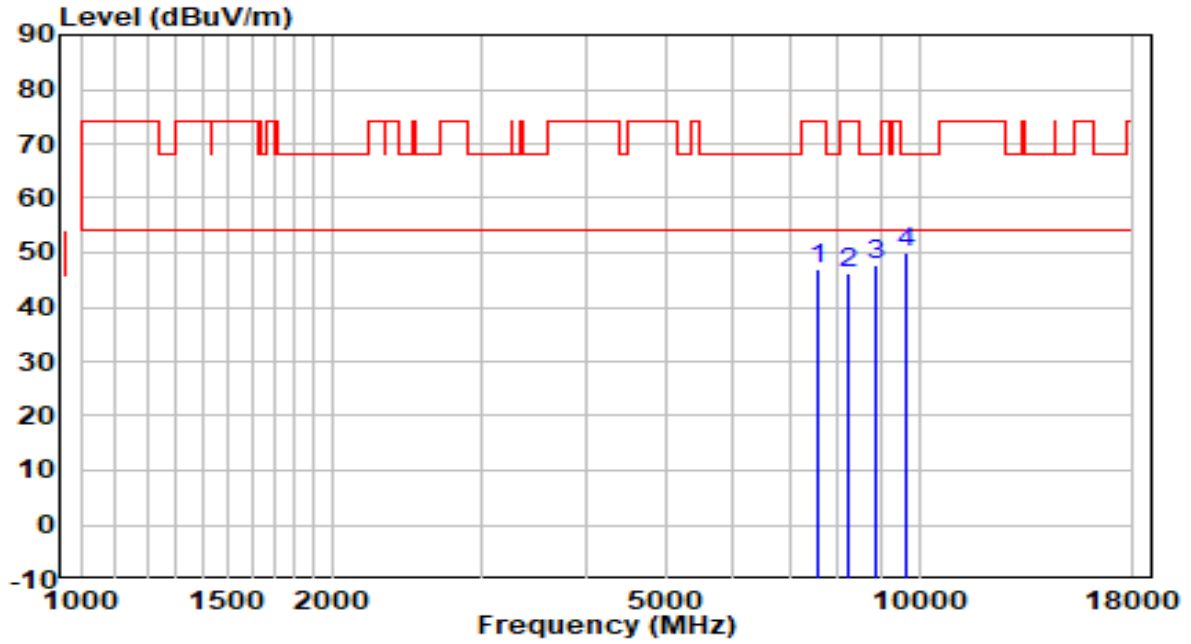


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7553.500	34.01	13.06	47.07	-26.93	74.00	Peak
2	8208.000	32.81	13.52	46.33	-27.67	74.00	Peak
3	8862.500	33.05	14.54	47.59	-20.61	68.20	Peak
4	* 9670.000	34.02	16.01	50.02	-18.18	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz	Test Voltage	By PoE

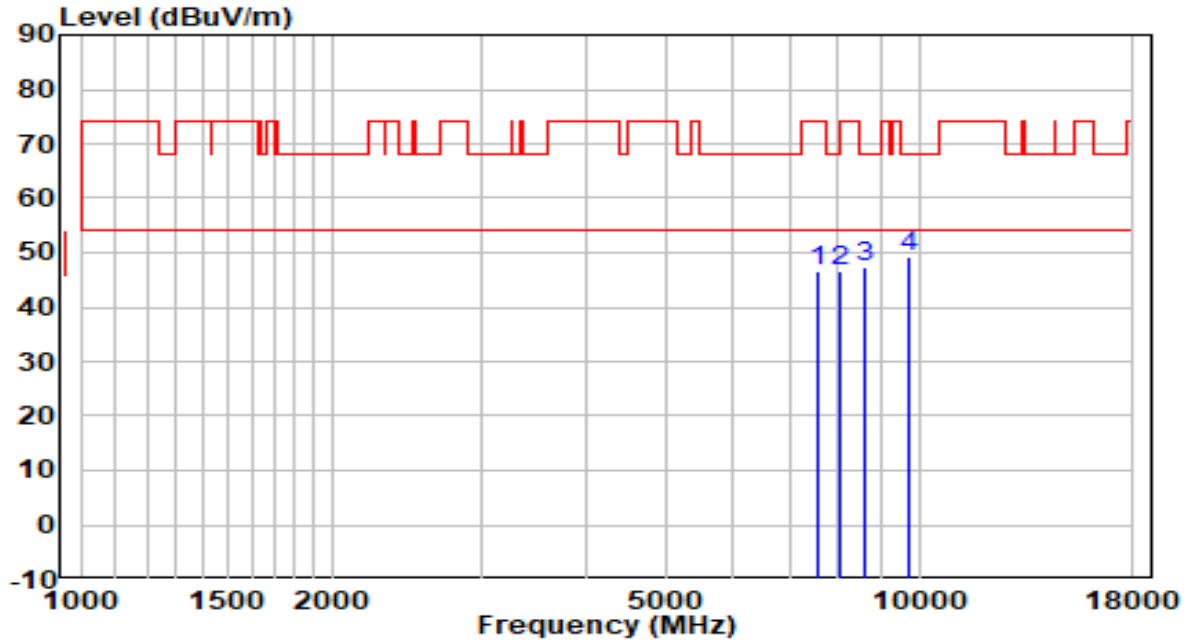


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7596.000	33.64	13.09	46.73	-27.27	74.00	Peak
2	8072.000	33.26	13.46	46.72	-27.28	74.00	Peak
3	8607.500	33.37	13.92	47.29	-20.91	68.20	Peak
4	* 9738.000	33.23	16.12	49.35	-18.85	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz	Test Voltage	By PoE

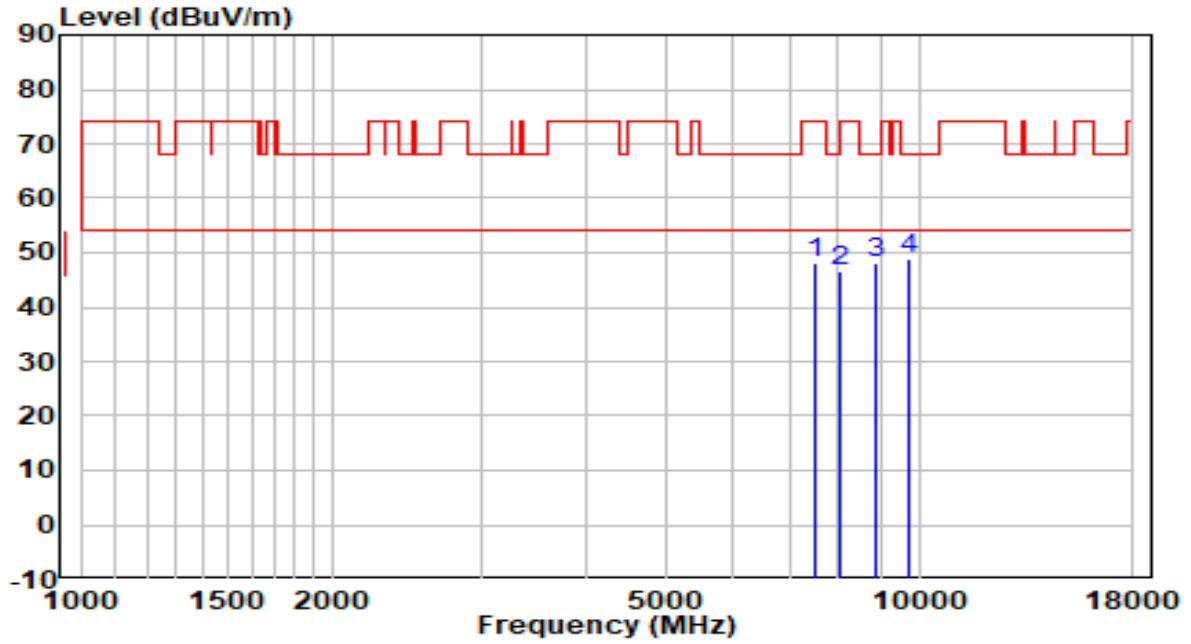


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7536.500	35.12	13.05	48.17	-25.83	74.00	Peak
2	8072.000	32.97	13.46	46.44	-27.56	74.00	Peak
3	8879.500	33.64	14.58	48.22	-19.98	68.20	Peak
4	* 9755.000	32.84	16.15	48.99	-19.21	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5710MHz	Test Voltage	By PoE

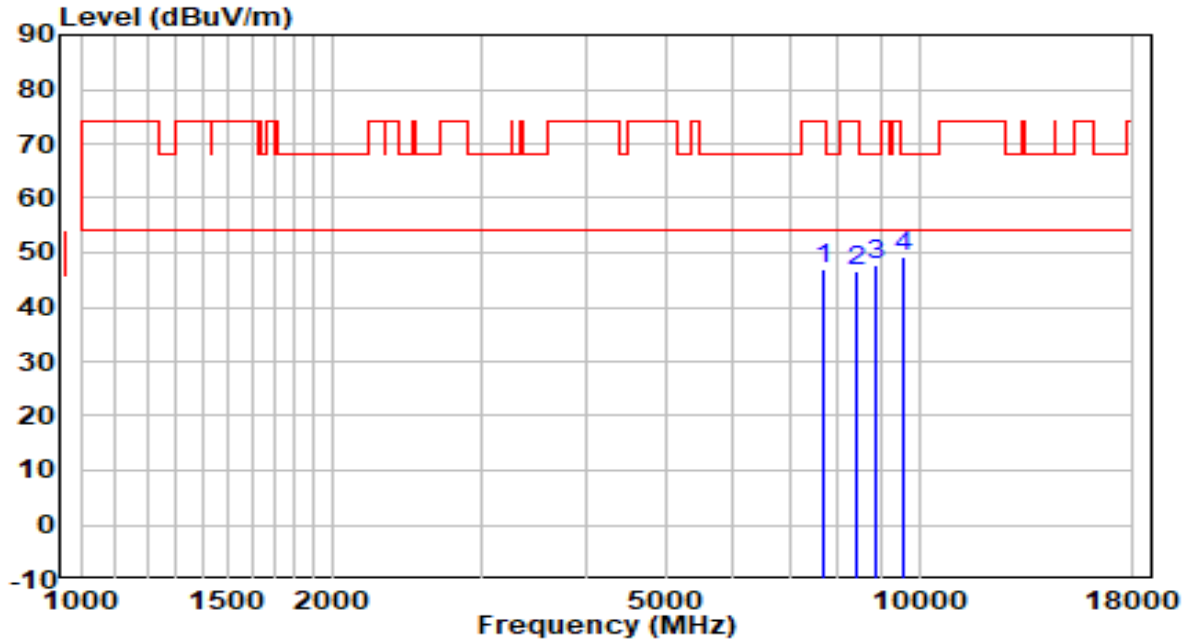


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7664.000	33.79	13.15	46.94	-27.06	74.00	Peak
2	8412.000	32.82	13.62	46.43	-27.57	74.00	Peak
3	8888.000	33.27	14.61	47.87	-20.33	68.20	Peak
4	* 9602.000	33.38	15.89	49.27	-18.93	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5710MHz	Test Voltage	By PoE

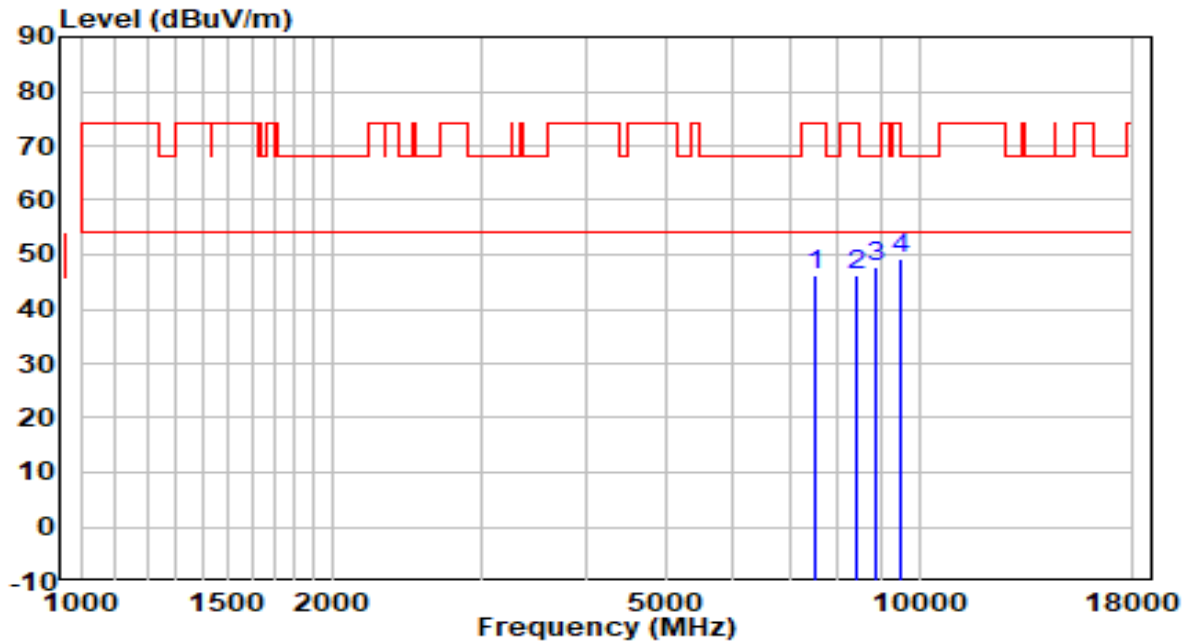


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7494.000	33.35	12.99	46.34	-27.66	74.00	Peak
2	8395.000	32.45	13.61	46.05	-27.95	74.00	Peak
3	8862.500	33.22	14.54	47.76	-20.44	68.20	Peak
4	* 9534.000	33.42	15.78	49.20	-19.00	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5755MHz	Test Voltage	By PoE

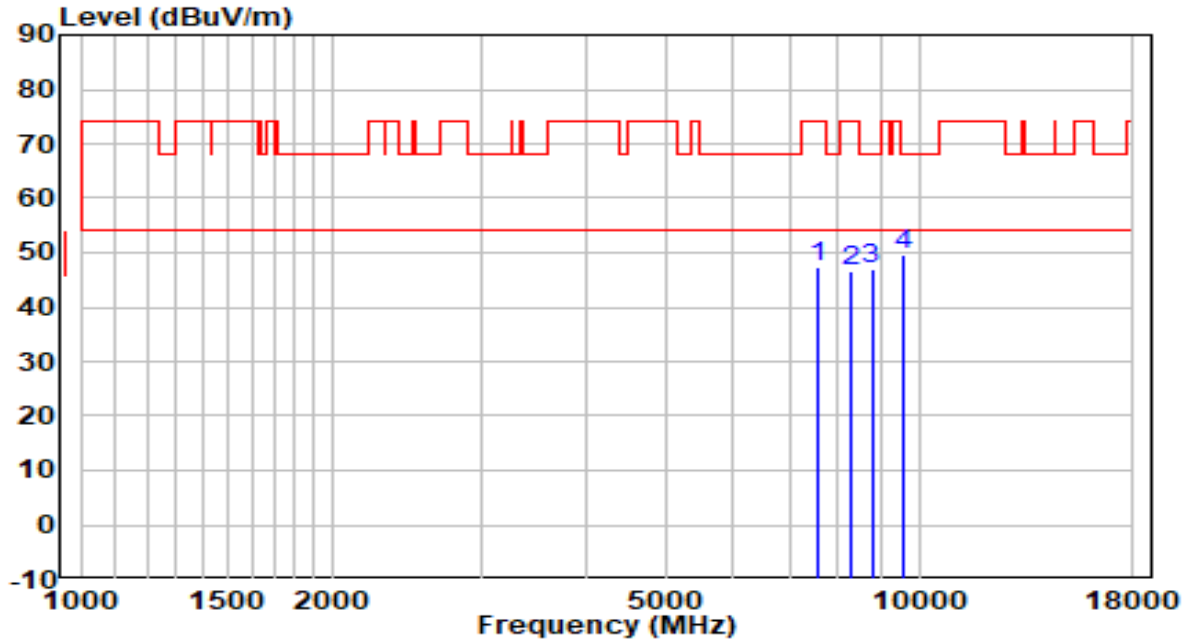


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7562.000	34.14	13.07	47.20	-26.80	74.00	Peak
2	8293.000	33.16	13.56	46.72	-27.28	74.00	Peak
3	8777.500	32.66	14.33	46.99	-21.21	68.20	Peak
4	* 9593.500	33.62	15.88	49.50	-18.70	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5755MHz	Test Voltage	By PoE

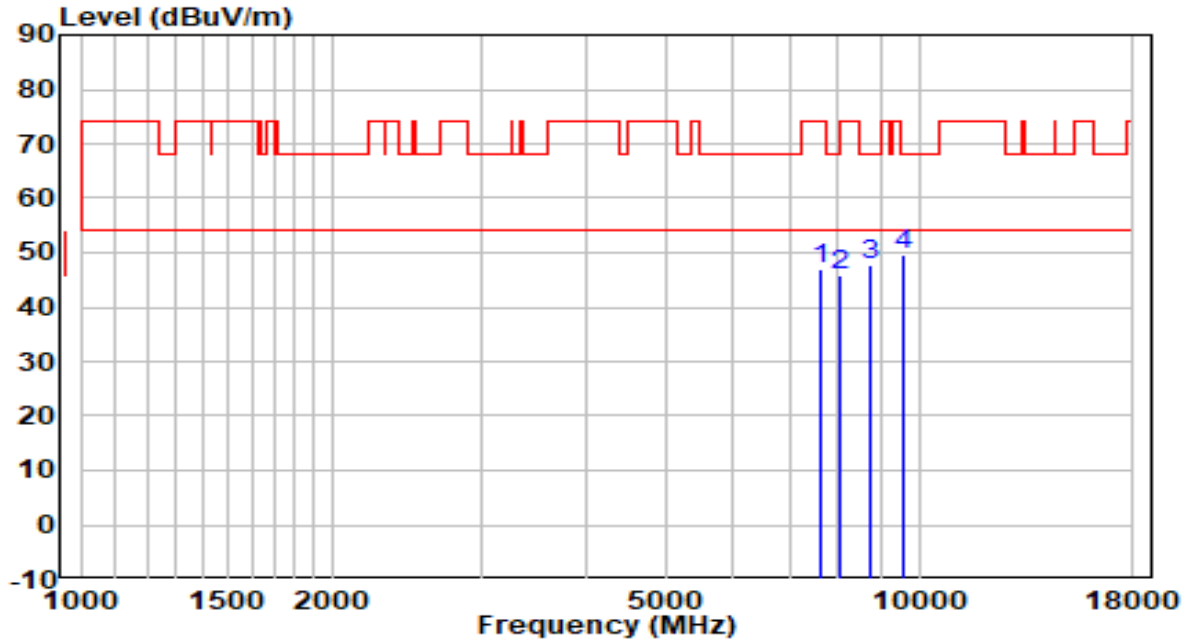


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7647.000	33.70	13.14	46.84	-27.16	74.00	Peak
2	8063.500	32.49	13.46	45.95	-28.05	74.00	Peak
3	8752.000	33.56	14.27	47.83	-20.37	68.20	Peak
4	* 9585.000	33.74	15.86	49.60	-18.60	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5795MHz	Test Voltage	By PoE

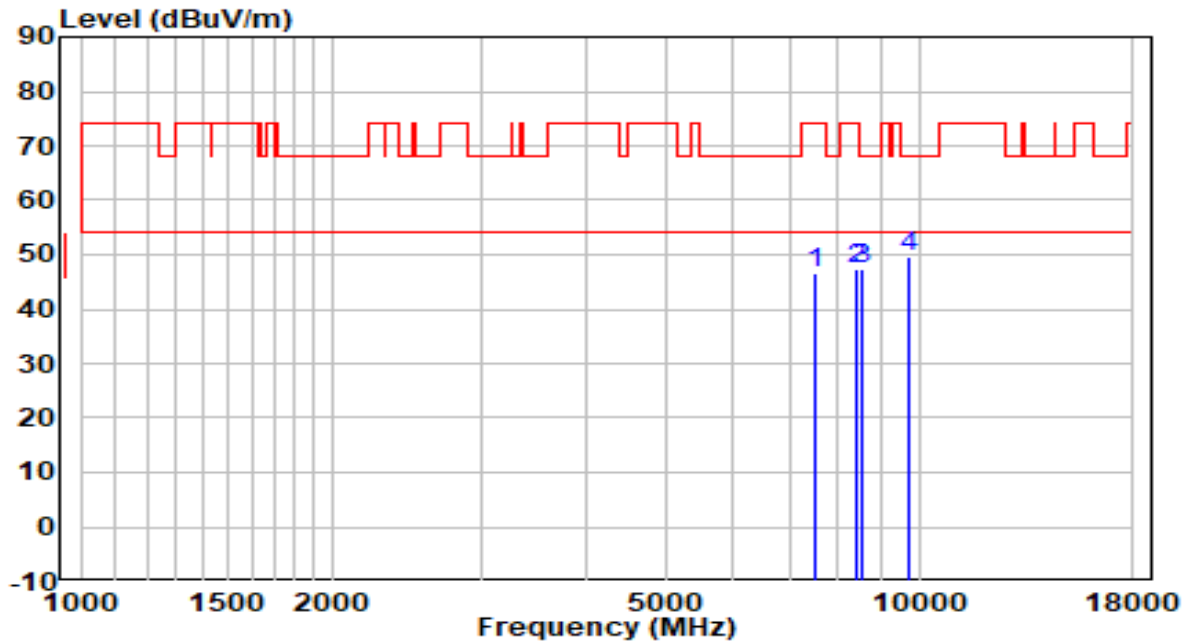


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7511.000	33.64	13.02	46.66	-27.34	74.00	Peak
2	8395.000	33.67	13.61	47.27	-26.73	74.00	Peak
3	8565.000	33.39	13.81	47.20	-21.00	68.20	Peak
4	* 9738.000	33.58	16.12	49.70	-18.50	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5795MHz	Test Voltage	By PoE

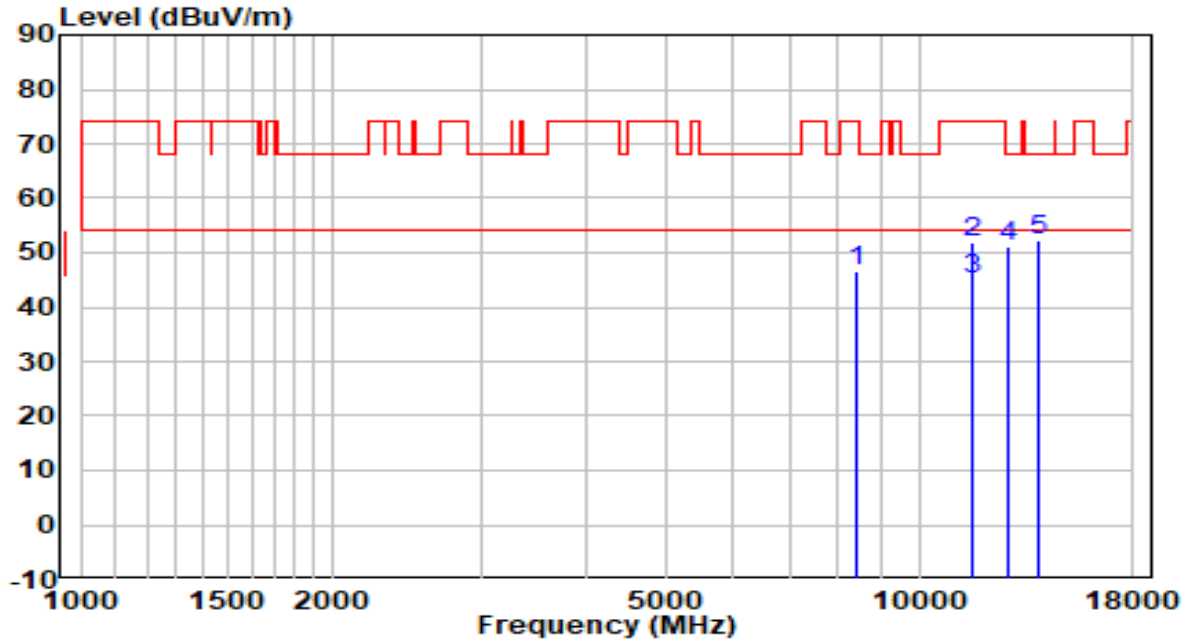


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8420.500	33.04	13.62	46.66	-27.34	74.00	Peak
2	11591.000	31.93	19.84	51.78	-22.22	74.00	Peak
3	* 11591.000	25.20	19.84	45.05	-8.95	54.00	Average
4	12764.000	32.01	19.19	51.20	-17.00	68.20	Peak
5	13877.500	29.86	22.28	52.15	-16.05	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	By PoE

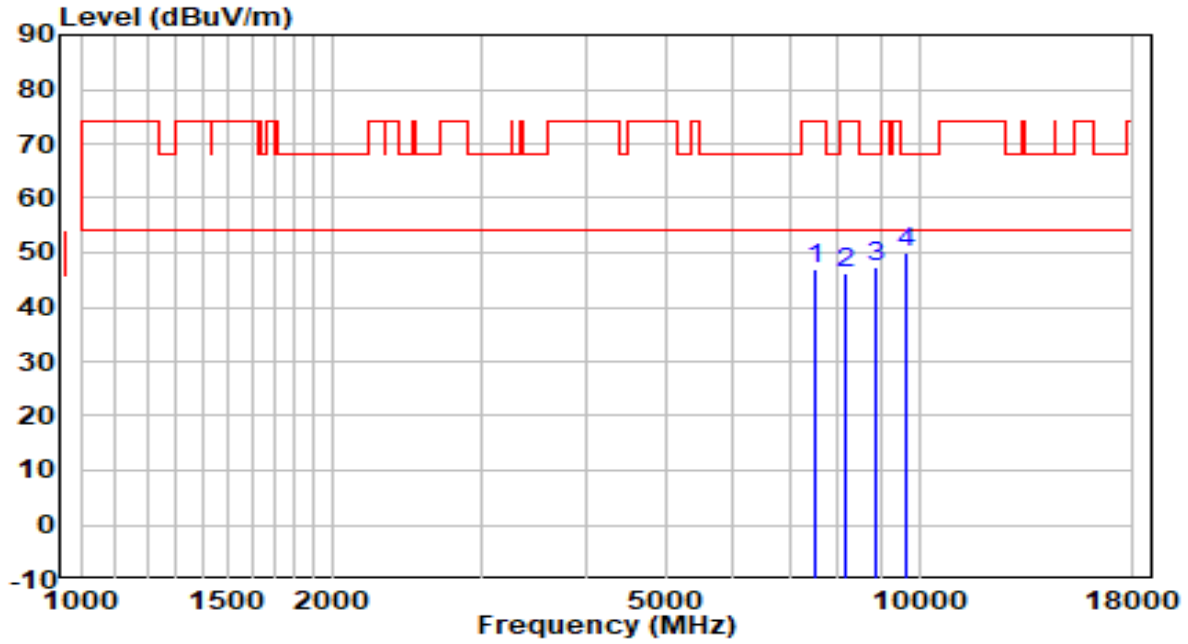


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7536.500	33.81	13.05	46.85	-27.15	74.00	Peak
2	8174.000	32.67	13.51	46.18	-27.82	74.00	Peak
3	8854.000	32.79	14.52	47.31	-20.89	68.20	Peak
4	* 9661.500	34.00	15.99	49.99	-18.21	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	By PoE

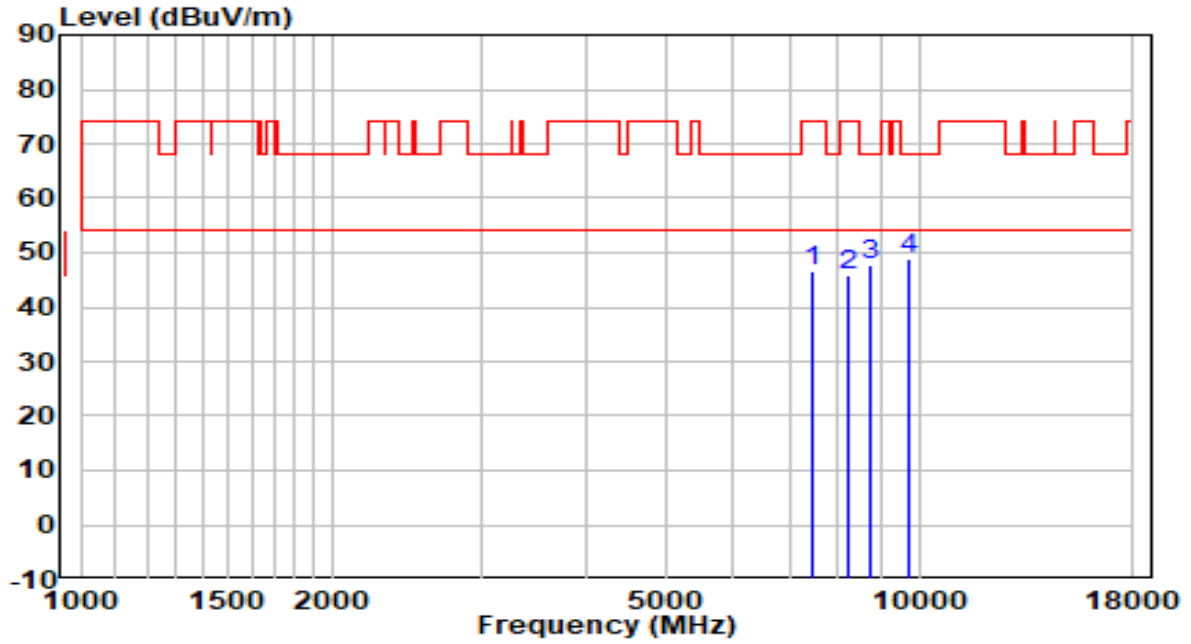


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7477.000	33.78	12.91	46.69	-27.31	74.00	Peak
2	8225.000	32.25	13.53	45.78	-28.22	74.00	Peak
3	8752.000	33.44	14.27	47.71	-20.49	68.20	Peak
4	* 9729.500	32.93	16.11	49.04	-19.16	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz	Test Voltage	By PoE

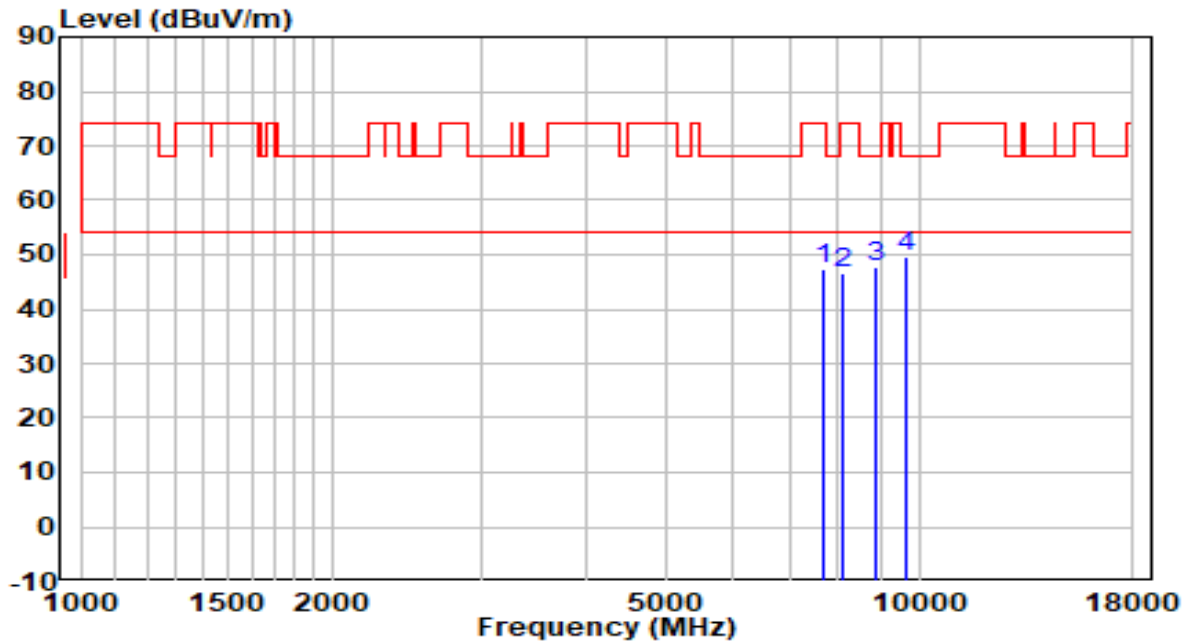


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7664.000	34.28	13.15	47.43	-26.57	74.00	Peak
2	8080.500	33.06	13.47	46.53	-27.47	74.00	Peak
3	8854.000	33.29	14.52	47.82	-20.38	68.20	Peak
4	* 9619.000	33.75	15.92	49.67	-18.53	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz	Test Voltage	By PoE

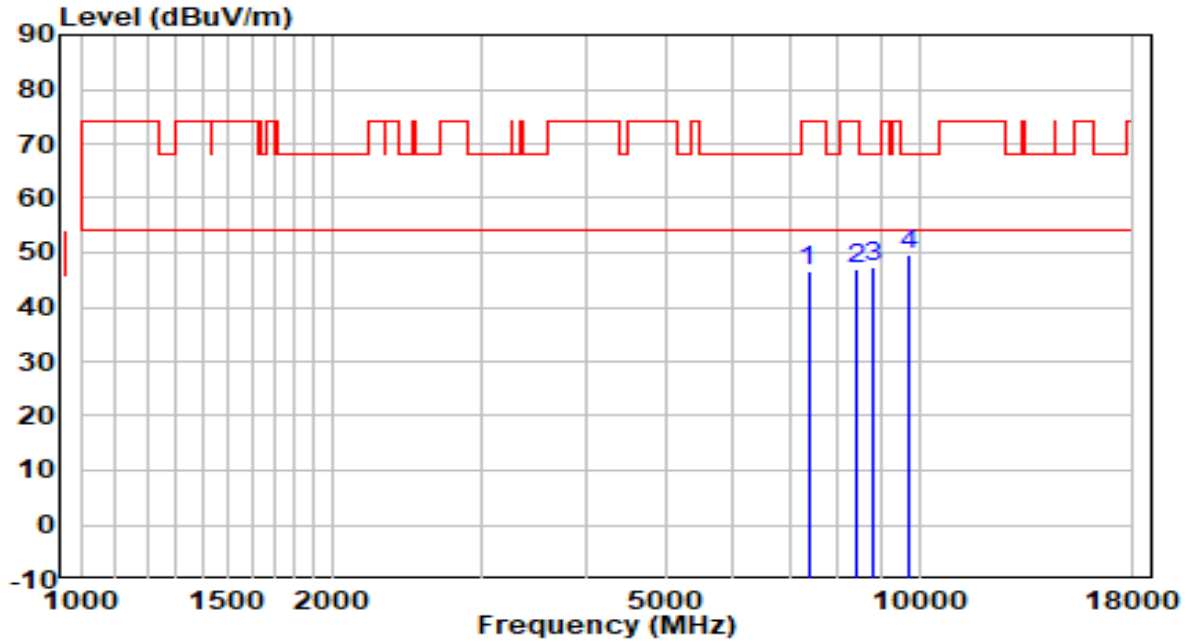


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7375.000	33.97	12.46	46.43	-27.57	74.00	Peak
2	8429.000	33.23	13.62	46.85	-27.15	74.00	Peak
3	8837.000	32.97	14.48	47.45	-20.75	68.20	Peak
4	* 9755.000	33.45	16.15	49.59	-18.61	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz	Test Voltage	By PoE

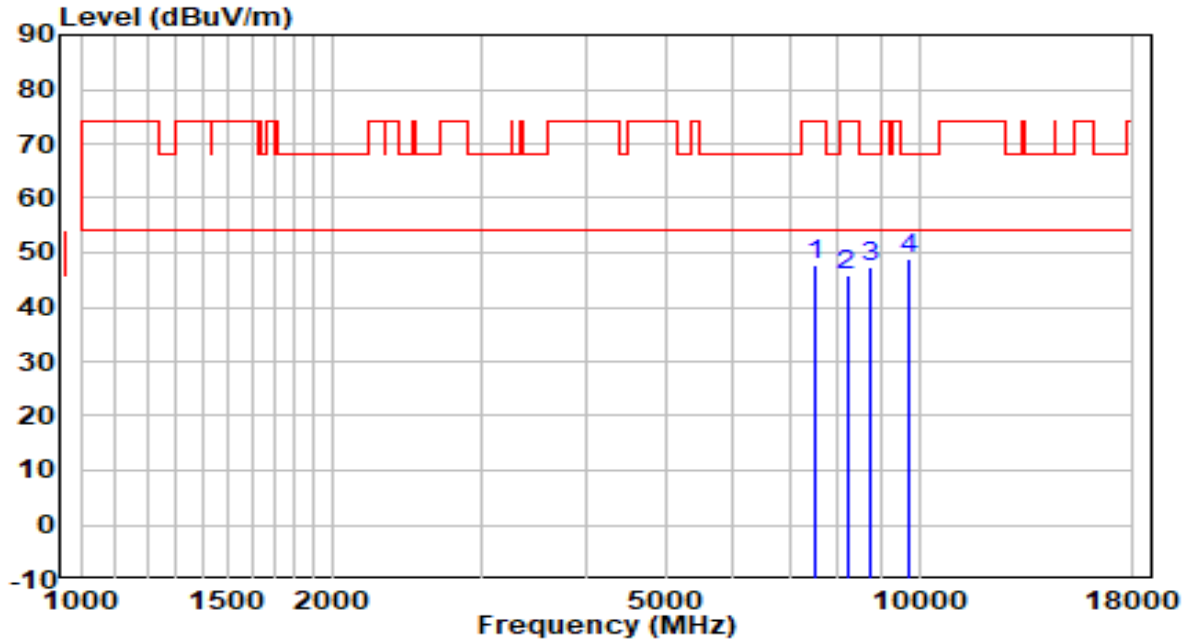


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7536.500	34.50	13.05	47.55	-26.45	74.00	Peak
2	8199.500	32.47	13.52	45.99	-28.01	74.00	Peak
3	8735.000	33.16	14.23	47.39	-20.81	68.20	Peak
4	* 9712.500	32.66	16.08	48.74	-19.46	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz	Test Voltage	By PoE

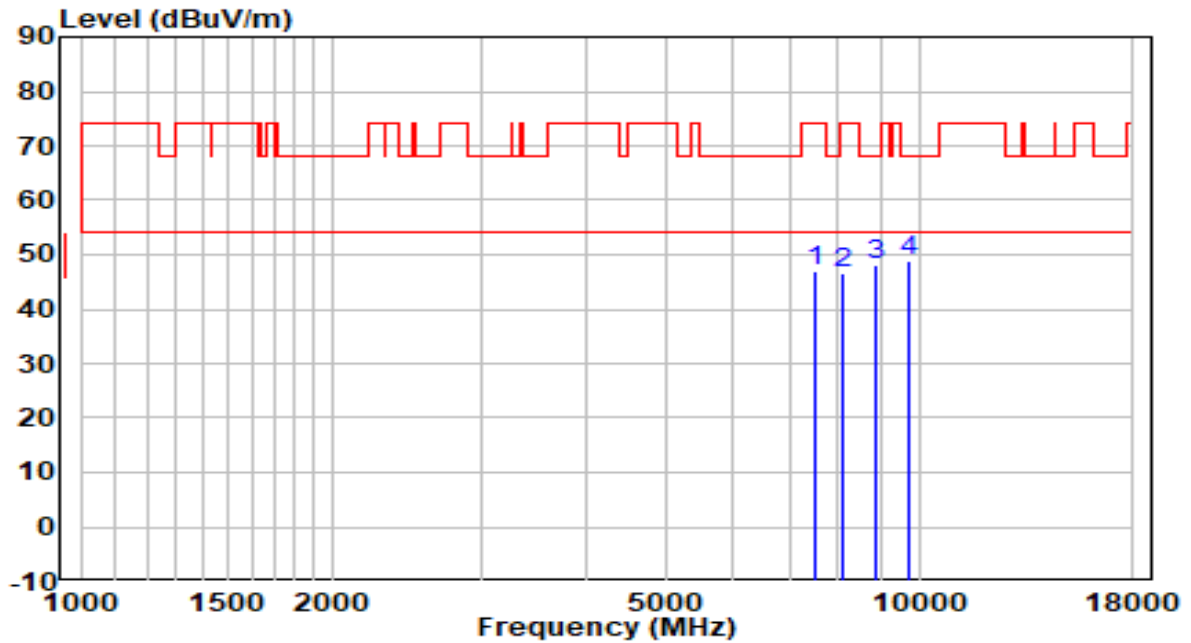


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7511.000	33.84	13.02	46.86	-27.14	74.00	Peak
2	8097.500	33.09	13.47	46.57	-27.43	74.00	Peak
3	8871.000	33.70	14.56	48.26	-19.94	68.20	Peak
4	* 9721.000	32.77	16.09	48.86	-19.34	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5610MHz	Test Voltage	By PoE

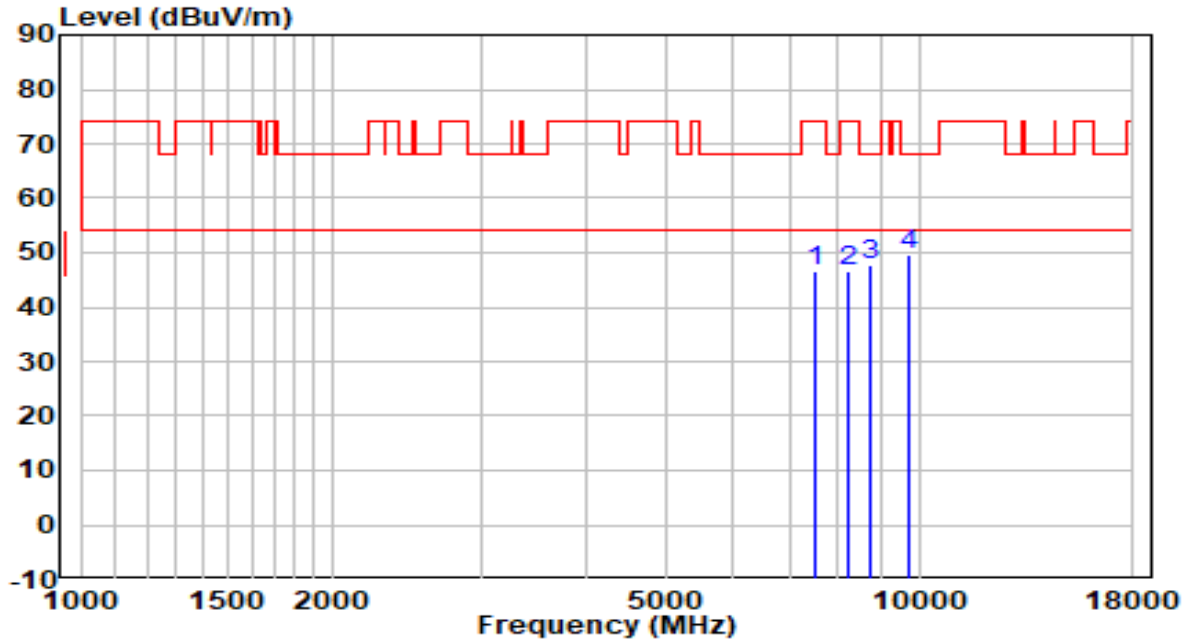


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7502.500	33.64	13.02	46.65	-27.35	74.00	Peak
2	8216.500	33.14	13.53	46.66	-27.34	74.00	Peak
3	8743.500	33.32	14.25	47.58	-20.62	68.20	Peak
4	* 9755.000	33.31	16.15	49.46	-18.74	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5610MHz	Test Voltage	By PoE

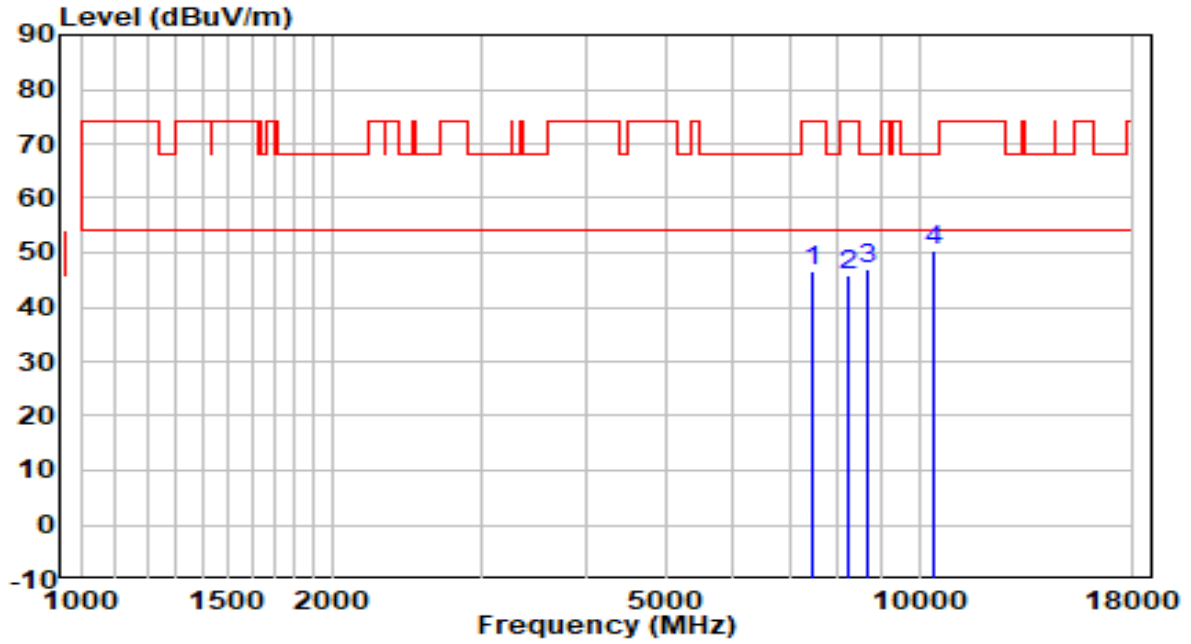


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7451.500	33.77	12.80	46.57	-27.43	74.00	Peak
2	8233.500	32.49	13.54	46.03	-27.97	74.00	Peak
3	8709.500	32.93	14.17	47.10	-21.10	68.20	Peak
4	* 10409.500	32.16	18.21	50.37	-17.83	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5690MHz	Test Voltage	By PoE

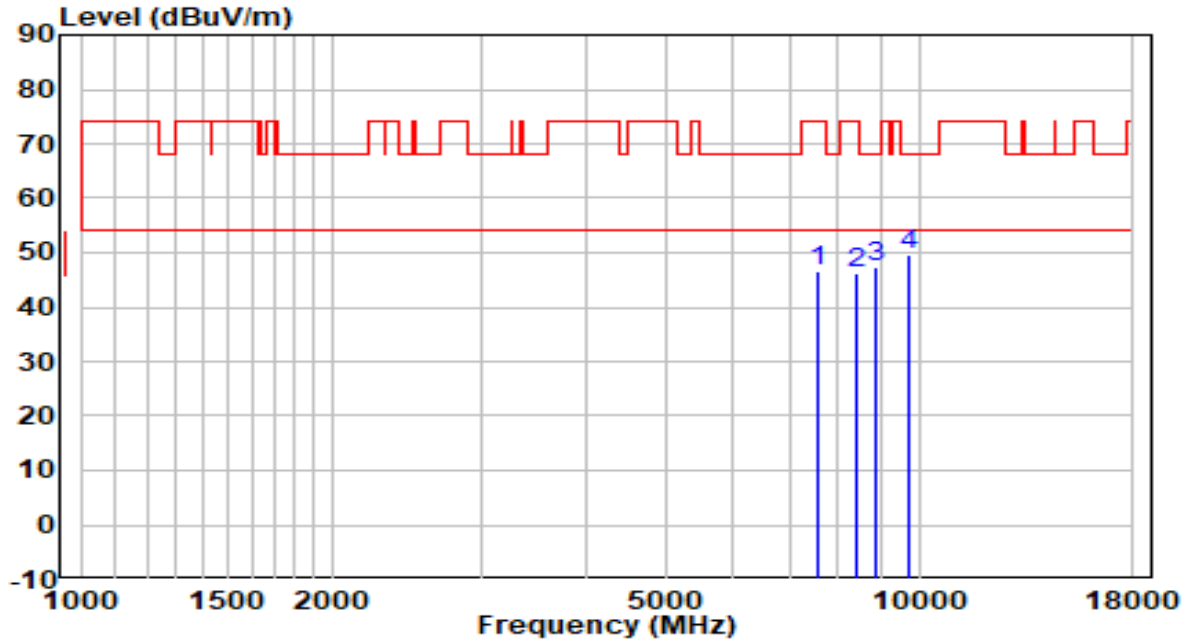


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7579.000	33.61	13.08	46.70	-27.30	74.00	Peak
2	8395.000	32.61	13.61	46.22	-27.78	74.00	Peak
3	8888.000	32.58	14.61	47.19	-21.01	68.20	Peak
4	* 9738.000	33.36	16.12	49.48	-18.72	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5690MHz	Test Voltage	By PoE

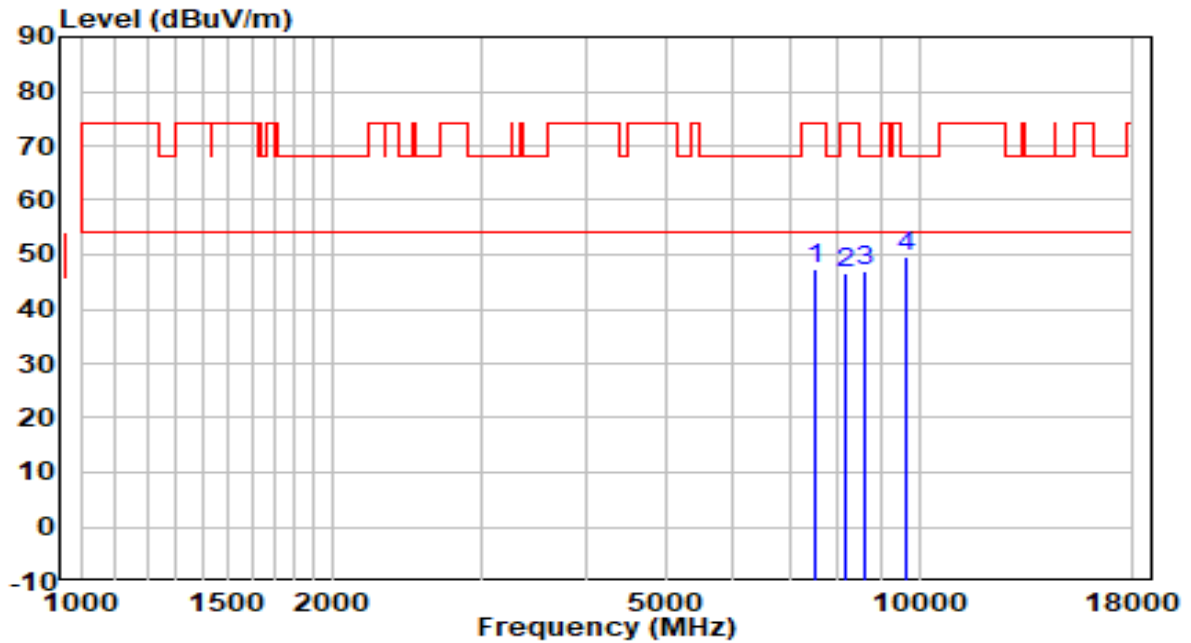


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7519.500	34.26	13.03	47.29	-26.71	74.00	Peak
2	8174.000	33.02	13.51	46.53	-27.47	74.00	Peak
3	8633.000	33.17	13.98	47.15	-21.05	68.20	Peak
4	* 9653.000	33.69	15.98	49.67	-18.53	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz	Test Voltage	By PoE

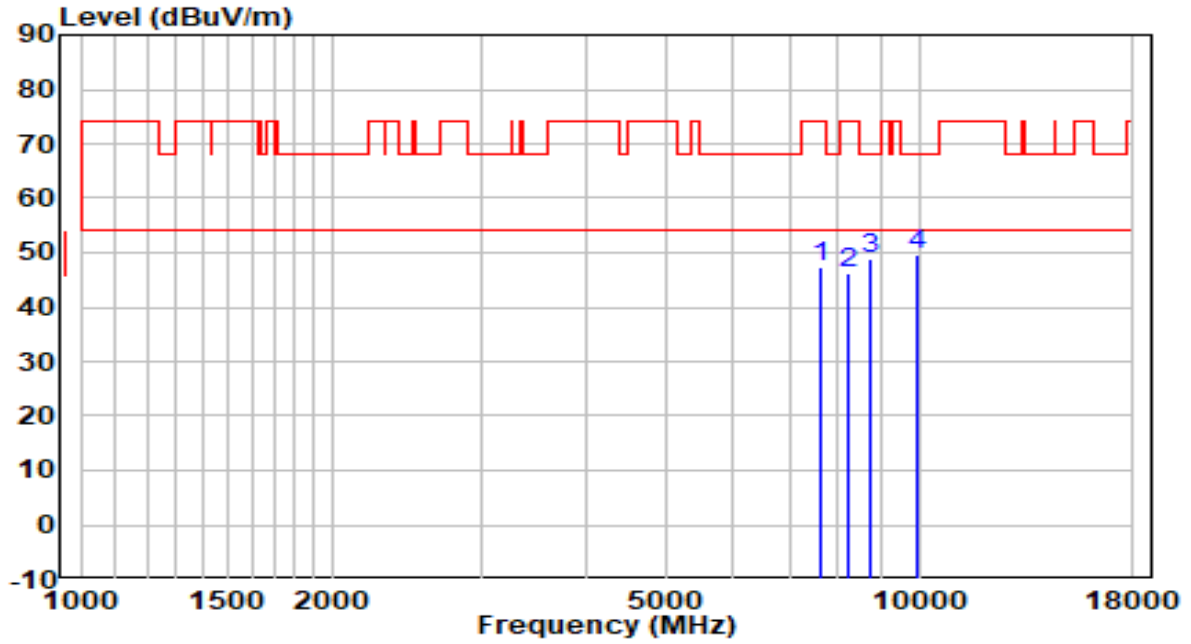


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7647.000	34.04	13.14	47.18	-26.82	74.00	Peak
2	8233.500	32.68	13.54	46.21	-27.79	74.00	Peak
3	8752.000	34.50	14.27	48.77	-19.43	68.20	Peak
4	* 9925.000	33.02	16.43	49.45	-18.75	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-23
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz	Test Voltage	By PoE

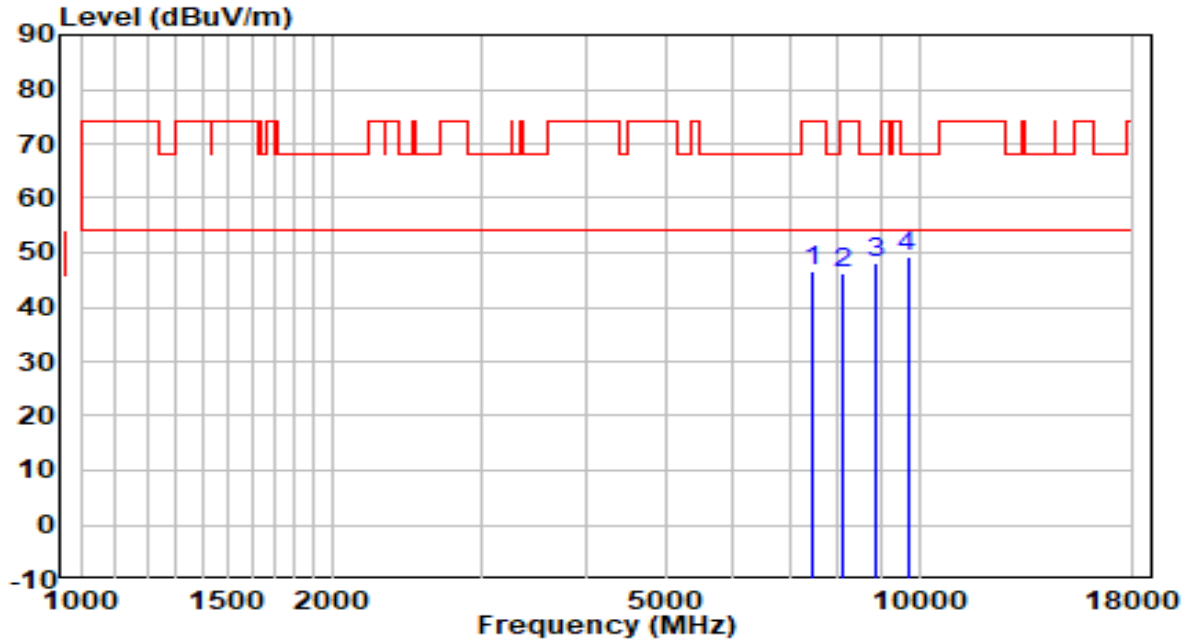


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7477.000	33.60	12.91	46.52	-27.48	74.00	Peak
2	8106.000	32.67	13.48	46.15	-27.85	74.00	Peak
3	8862.500	33.40	14.54	47.94	-20.26	68.20	Peak
4	* 9687.000	33.39	16.03	49.42	-18.78	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80+80 at Channel 5210+5290MHz	Test Voltage	By PoE

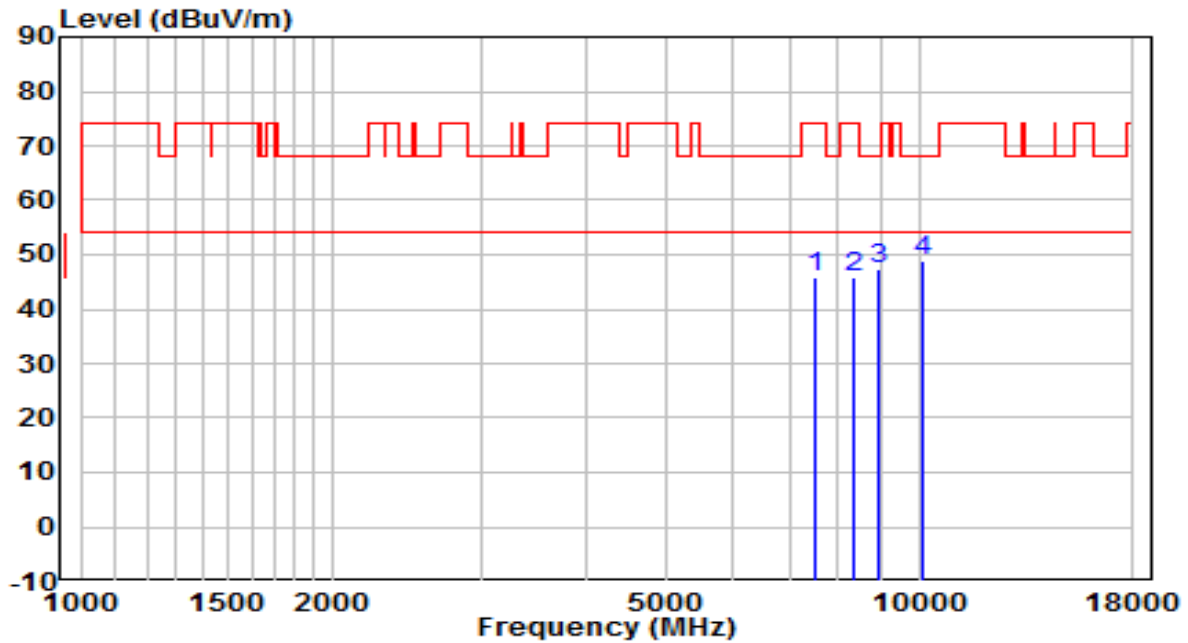


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7502.500	32.79	13.02	45.81	-28.19	74.00	Peak
2	8352.500	32.15	13.59	45.73	-28.27	74.00	Peak
3	8956.000	32.71	14.77	47.48	-20.72	68.20	Peak
4	* 10129.000	31.91	17.08	48.98	-19.22	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80+80 at Channel 5210+5290MHz	Test Voltage	By PoE

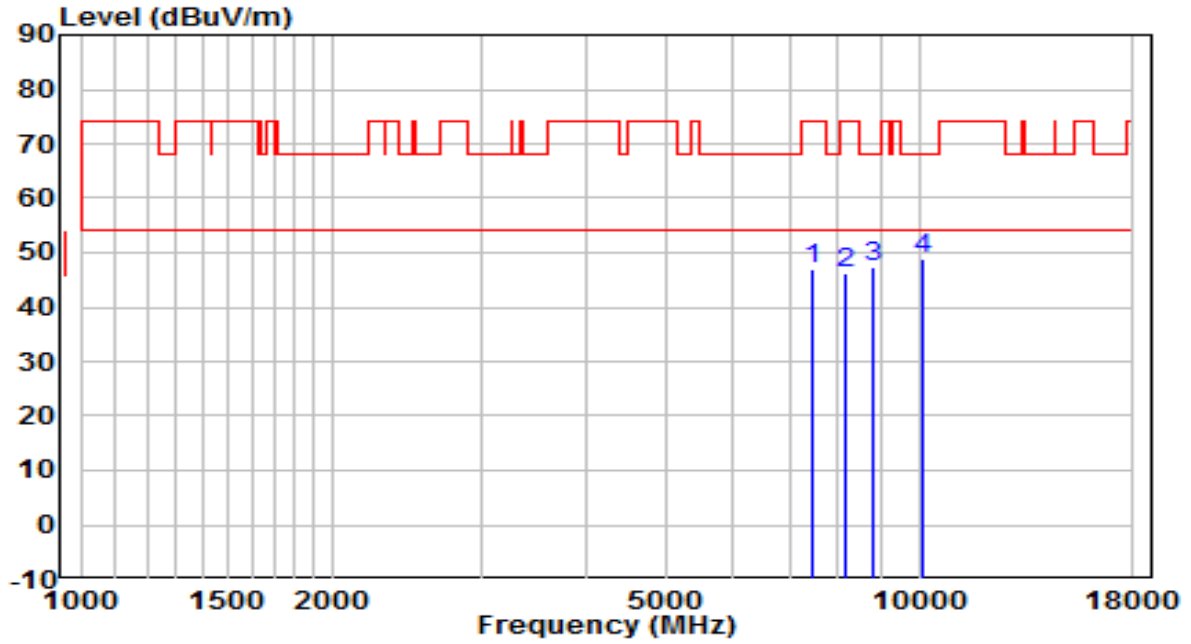


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7477.000	33.92	12.91	46.83	-27.17	74.00	Peak
2	8157.000	32.76	13.50	46.27	-27.73	74.00	Peak
3	8828.500	32.74	14.46	47.20	-21.00	68.20	Peak
4	* 10120.500	31.64	17.04	48.69	-19.51	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80+80 at Channel 5530+5610MHz	Test Voltage	By PoE

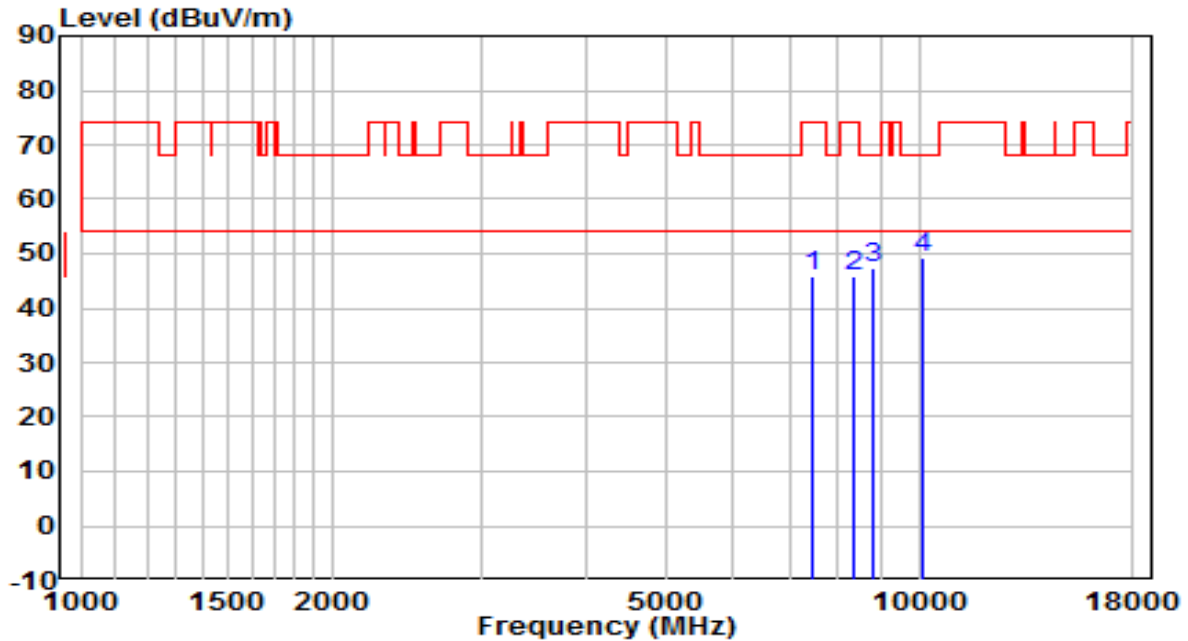


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7477.000	33.09	12.91	46.01	-27.99	74.00	Peak
2	8369.500	32.19	13.60	45.79	-28.21	74.00	Peak
3	8794.500	32.84	14.38	47.21	-20.99	68.20	Peak
4	* 10069.500	32.53	16.84	49.37	-18.83	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.2°C/44.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80+80 at Channel 5530+5610MHz	Test Voltage	By PoE

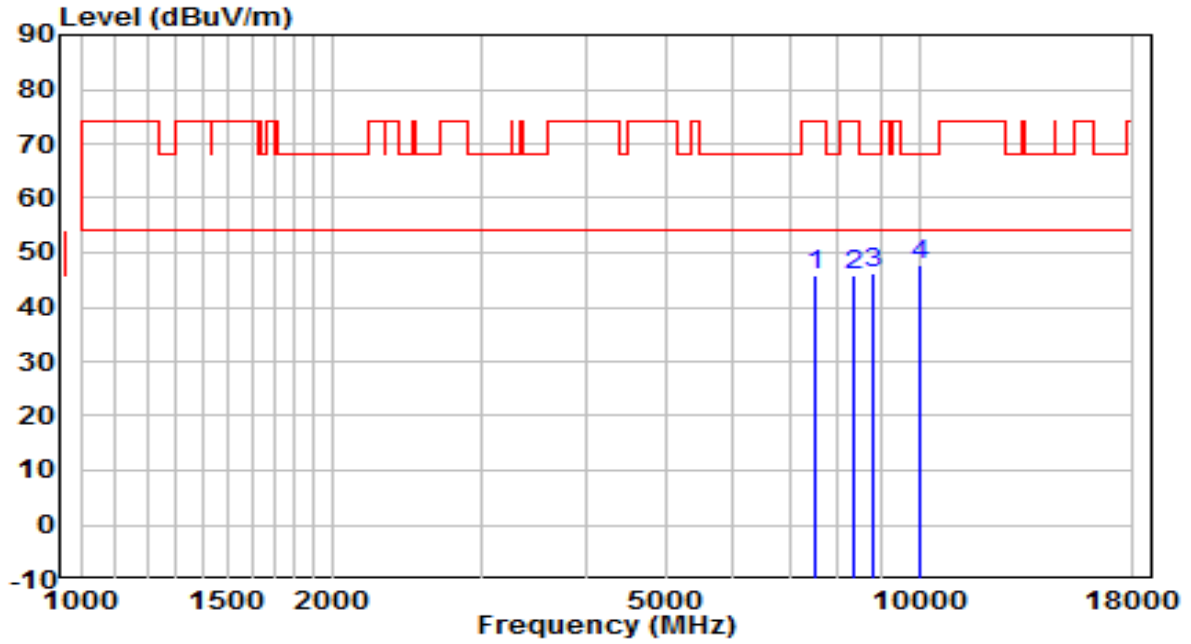


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7502.500	32.92	13.02	45.94	-28.06	74.00	Peak
2	8344.000	32.30	13.58	45.88	-28.12	74.00	Peak
3	8794.500	31.91	14.38	46.28	-21.92	68.20	Peak
4	* 10027.000	30.93	16.67	47.60	-20.60	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

APEX0584 & ANT Model No.: ANT-4x4-5314

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5180MHz	Test Voltage	By PoE

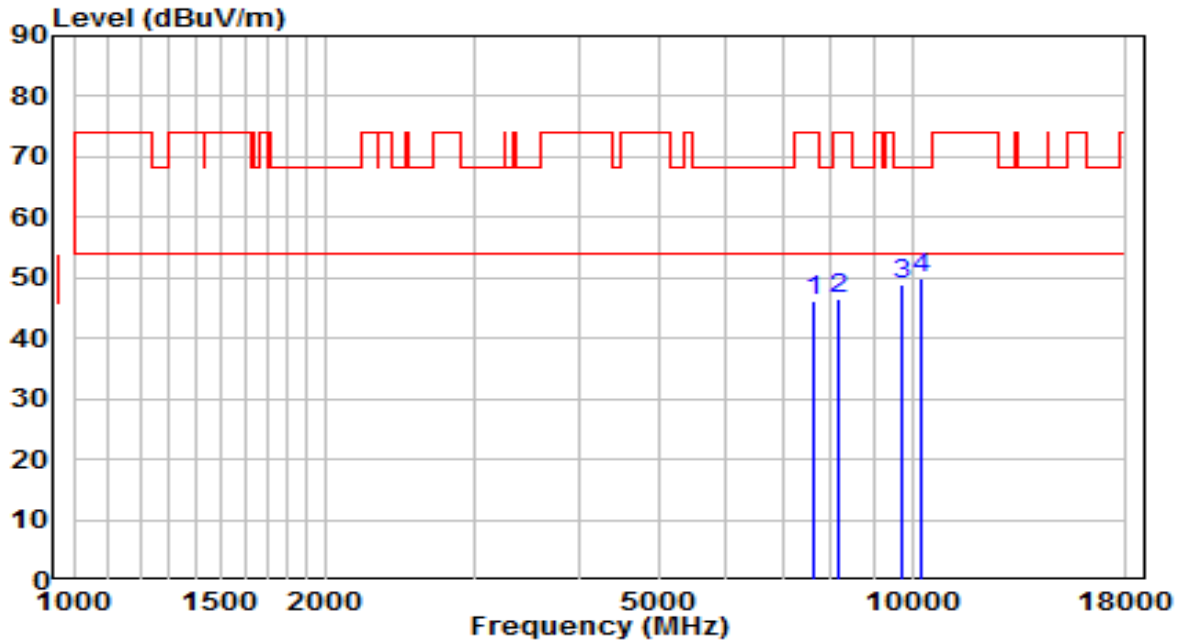


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7621.500	33.21	13.12	46.33	-27.67	74.00	Peak
2	8182.500	32.90	13.51	46.41	-27.59	74.00	Peak
3	9746.500	32.91	16.13	49.05	-19.15	68.20	Peak
4	* 10273.500	32.29	17.66	49.95	-18.25	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5180MHz	Test Voltage	By PoE

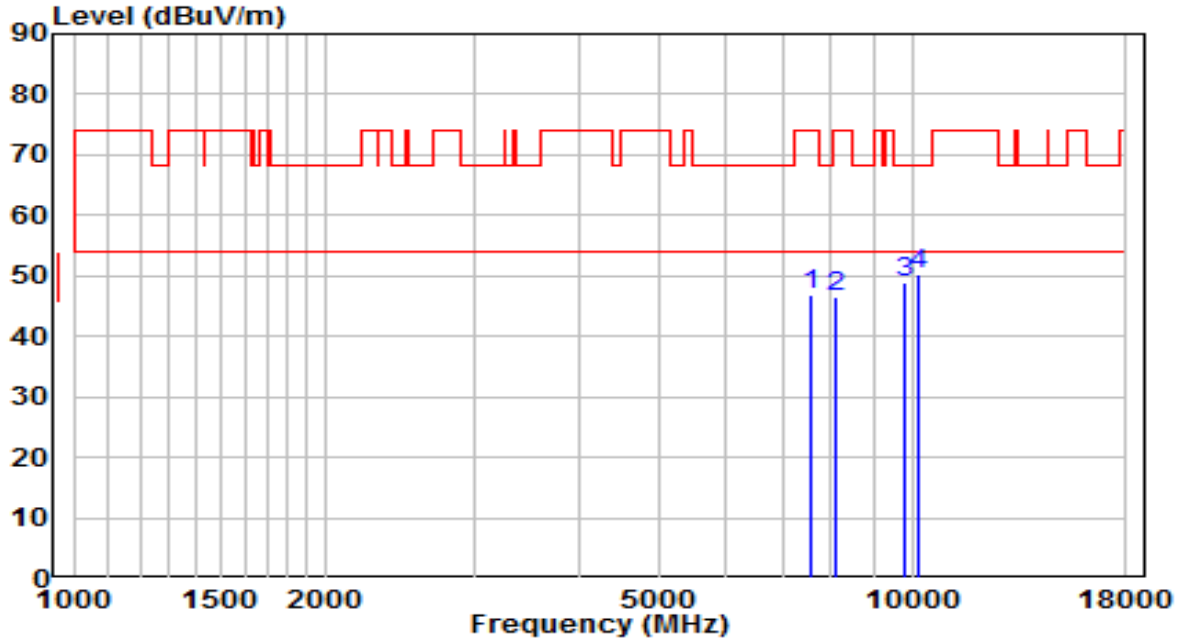


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7570.500	33.63	13.07	46.70	-27.30	74.00	Peak
2	8097.500	32.89	13.47	46.36	-27.64	74.00	Peak
3	9763.500	32.73	16.16	48.89	-19.31	68.20	Peak
4	* 10163.000	32.89	17.22	50.11	-18.09	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5220MHz	Test Voltage	By PoE

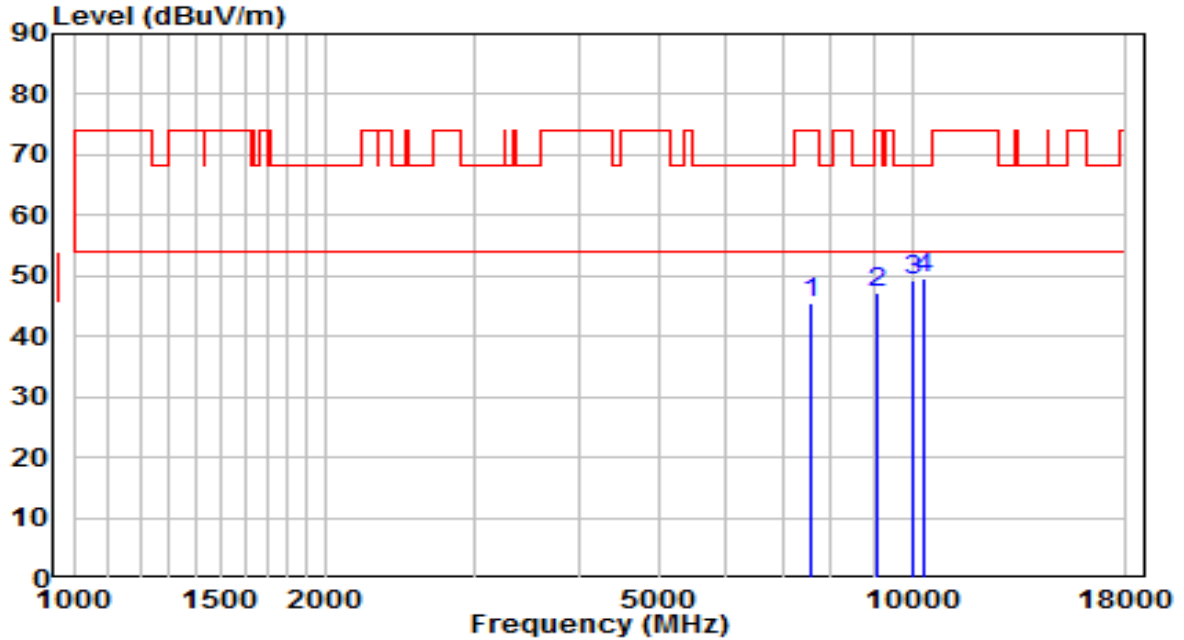


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7553.500	32.54	13.06	45.60	-28.40	74.00	Peak
2	9083.500	32.26	15.02	47.28	-26.72	74.00	Peak
3	10044.000	32.43	16.74	49.17	-19.03	68.20	Peak
4	* 10333.000	31.70	17.90	49.60	-18.60	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5220MHz	Test Voltage	By PoE

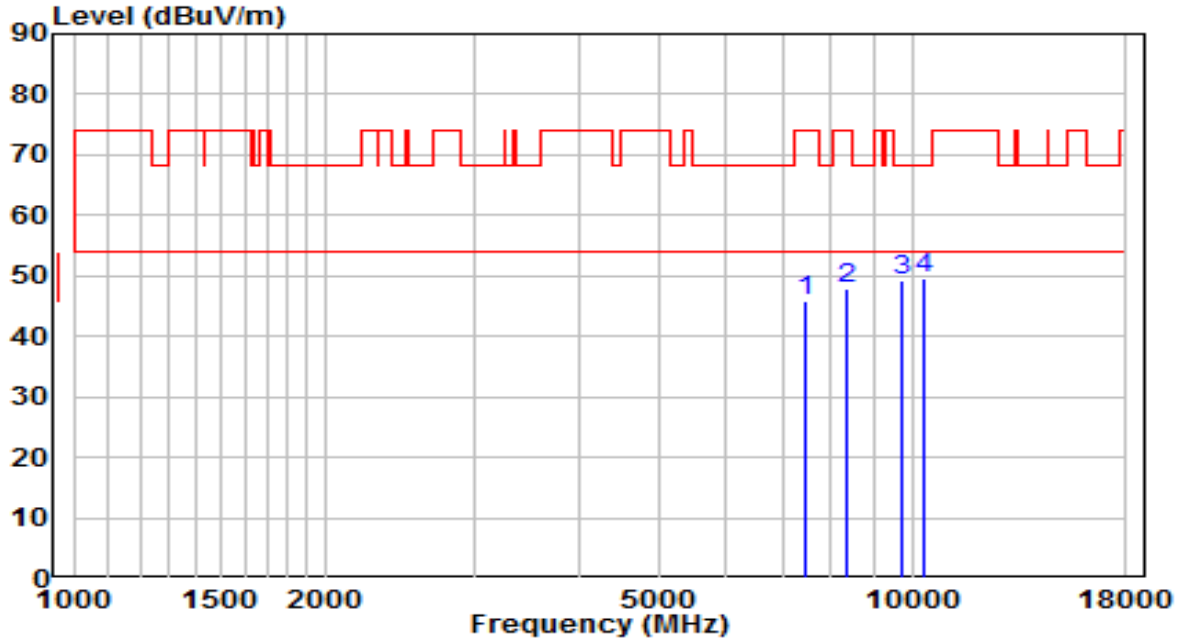


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7477.000	32.77	12.91	45.69	-28.31	74.00	Peak
2	8361.000	34.40	13.59	47.99	-26.01	74.00	Peak
3	9746.500	33.15	16.13	49.28	-18.92	68.20	Peak
4	* 10299.000	31.97	17.76	49.73	-18.47	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5240MHz	Test Voltage	By PoE

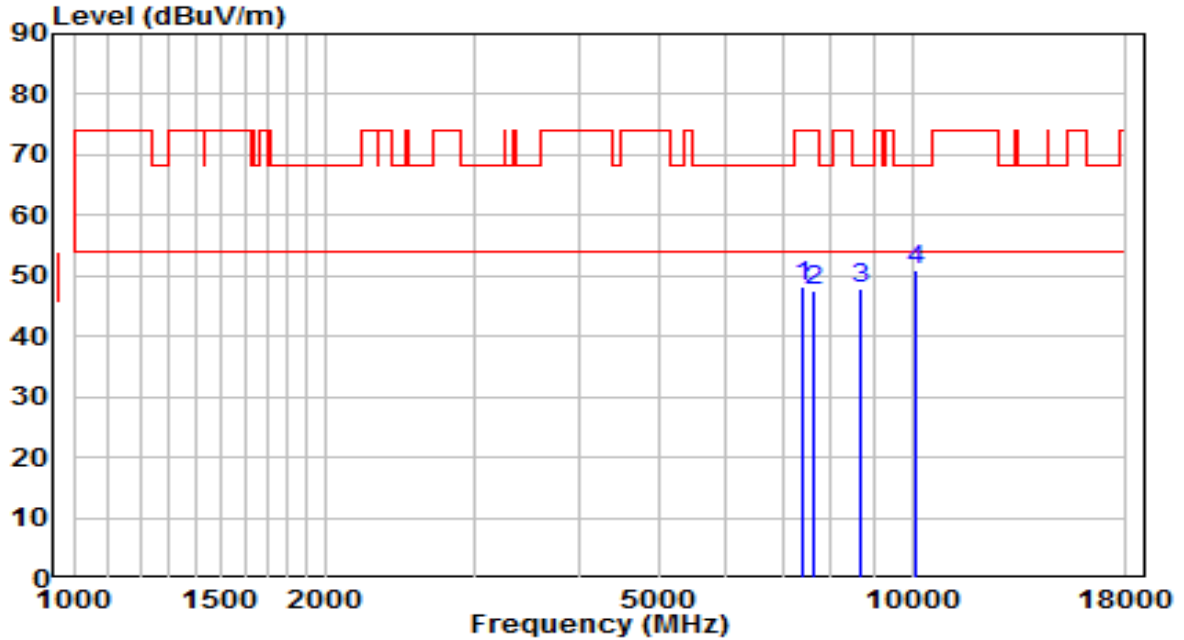


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7417.500	35.43	12.65	48.08	-25.92	74.00	Peak
2	7655.500	34.24	13.14	47.38	-26.62	74.00	Peak
3	8692.500	33.91	14.13	48.03	-20.17	68.20	Peak
4	* 10103.500	33.94	16.98	50.92	-17.28	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5240MHz	Test Voltage	By PoE

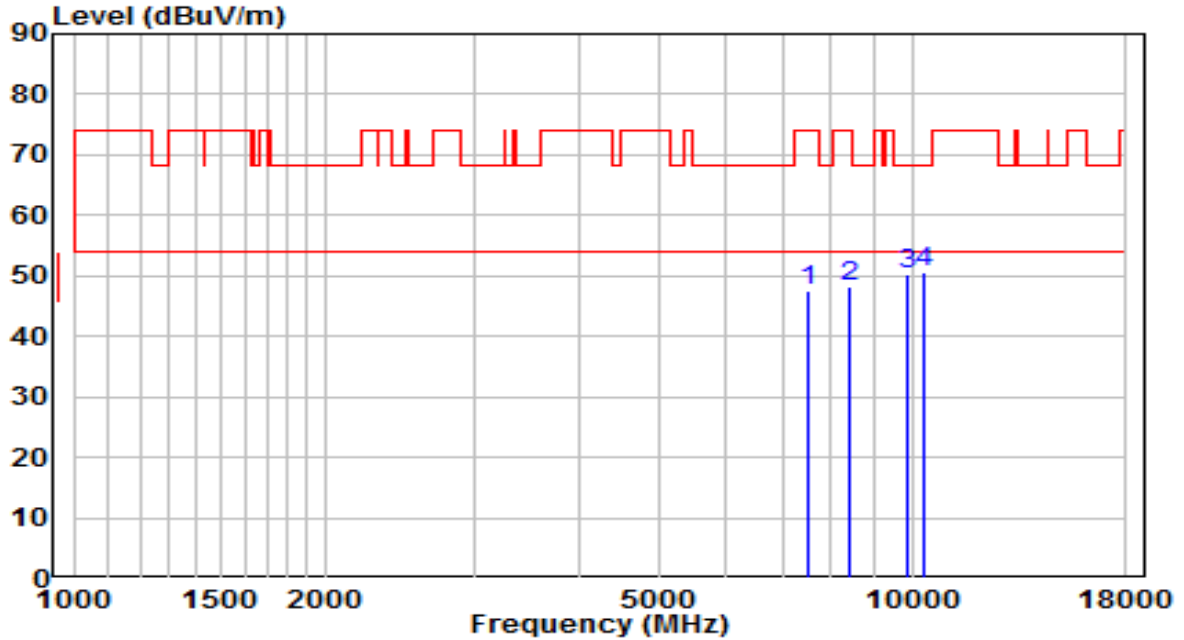


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7519.500	34.50	13.03	47.53	-26.47	74.00	Peak
2	8403.500	34.78	13.61	48.39	-25.61	74.00	Peak
3	9891.000	33.95	16.38	50.32	-17.88	68.20	Peak
4	* 10307.500	32.73	17.80	50.53	-17.67	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5260MHz	Test Voltage	By PoE

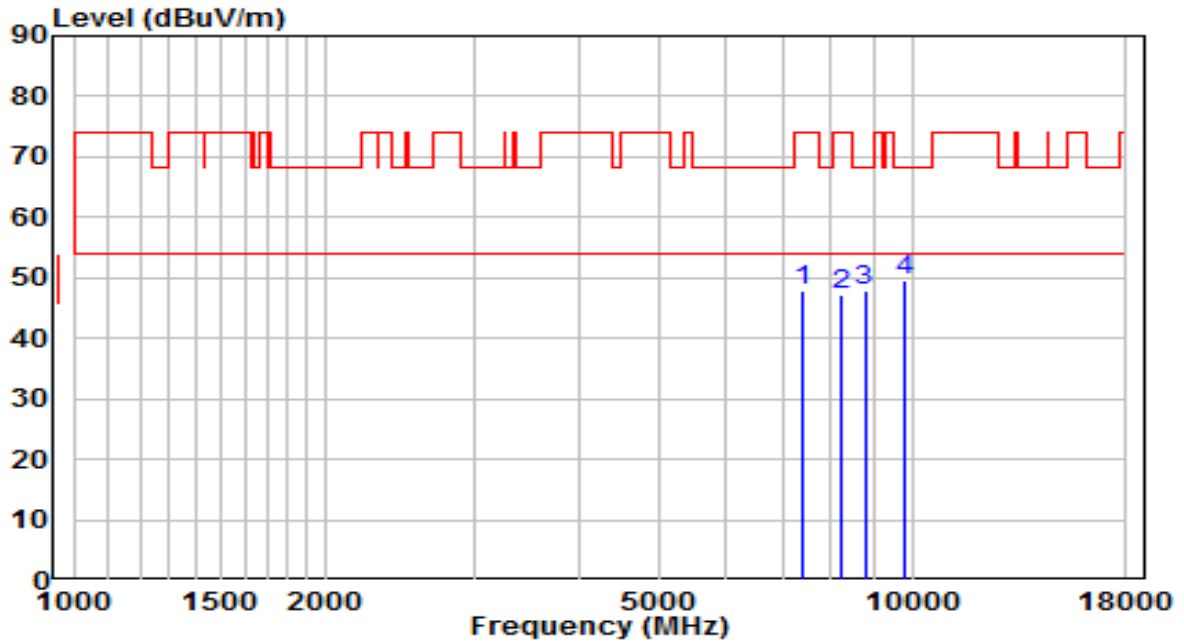


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7409.000	35.27	12.61	47.88	-26.12	74.00	Peak
2	8233.500	33.80	13.54	47.33	-26.67	74.00	Peak
3	8777.500	33.68	14.33	48.01	-20.19	68.20	Peak
4	* 9780.500	33.28	16.19	49.47	-18.73	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5260MHz	Test Voltage	By PoE

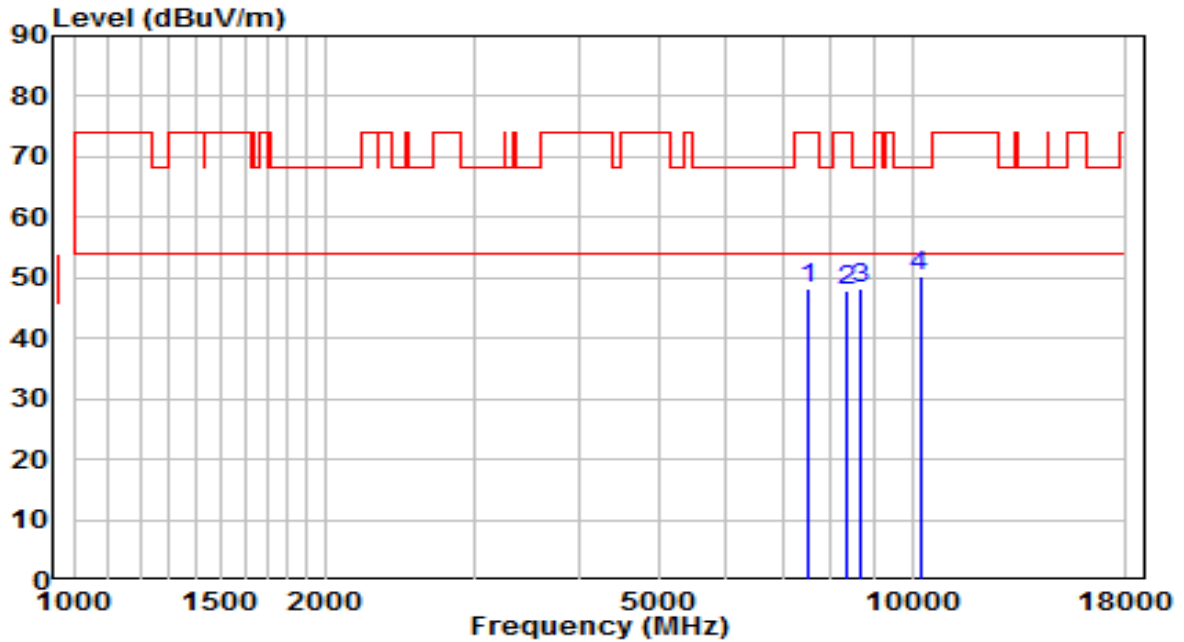


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7519.500	35.29	13.03	48.32	-25.68	74.00	Peak
2	8386.500	34.24	13.60	47.85	-26.15	74.00	Peak
3	8650.000	34.30	14.02	48.33	-19.87	68.20	Peak
4	* 10214.000	32.90	17.42	50.32	-17.88	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5320MHz	Test Voltage	By PoE

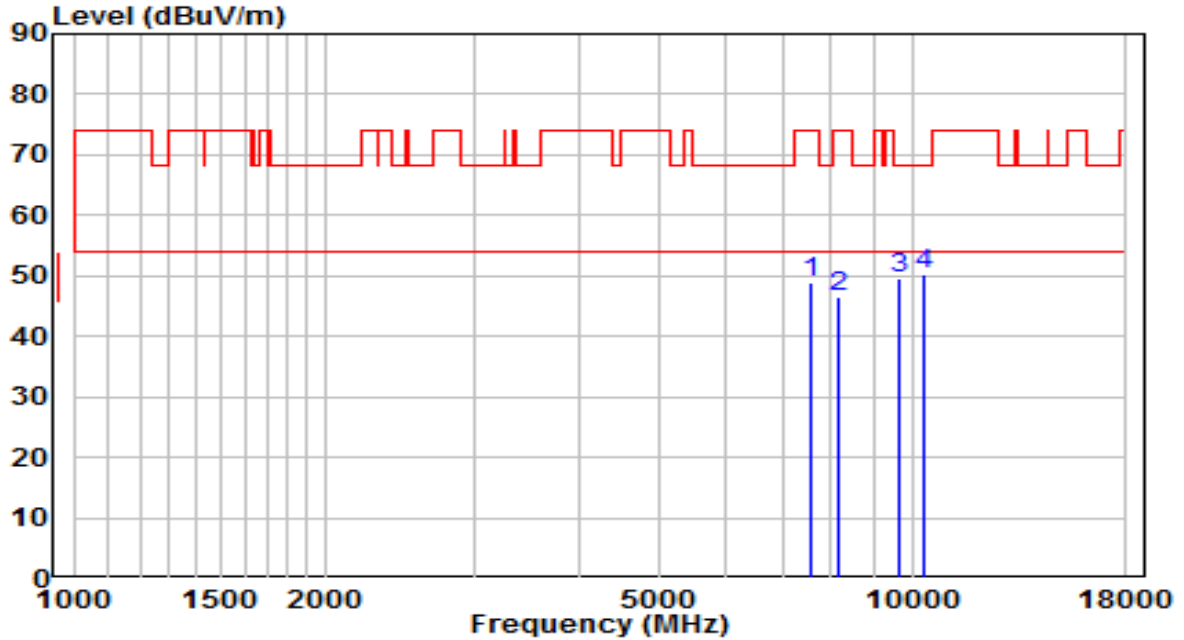


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7596.000	35.82	13.09	48.91	-25.09	74.00	Peak
2	8140.000	33.20	13.49	46.69	-27.31	74.00	Peak
3	9670.000	33.62	16.01	49.63	-18.57	68.20	Peak
4	* 10333.000	32.32	17.90	50.22	-17.98	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5320MHz	Test Voltage	By PoE

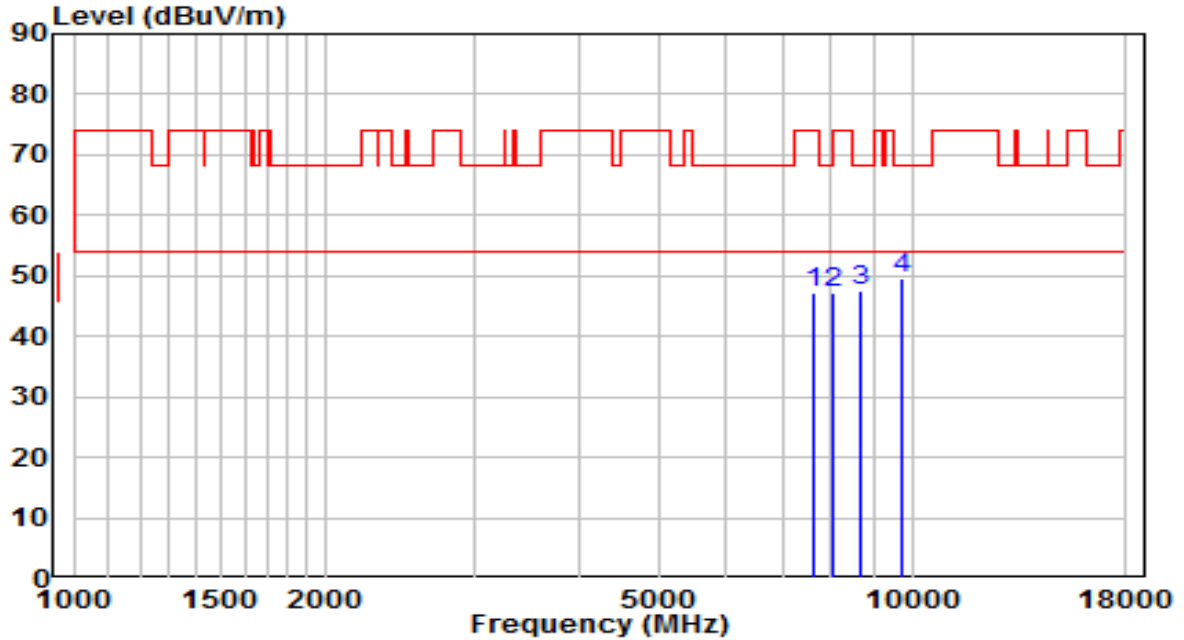


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7647.000	34.12	13.14	47.25	-26.75	74.00	Peak
2	8046.500	33.87	13.45	47.32	-26.68	74.00	Peak
3	8667.000	33.52	14.06	47.59	-20.61	68.20	Peak
4	* 9738.000	33.38	16.12	49.50	-18.70	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5500MHz	Test Voltage	By PoE

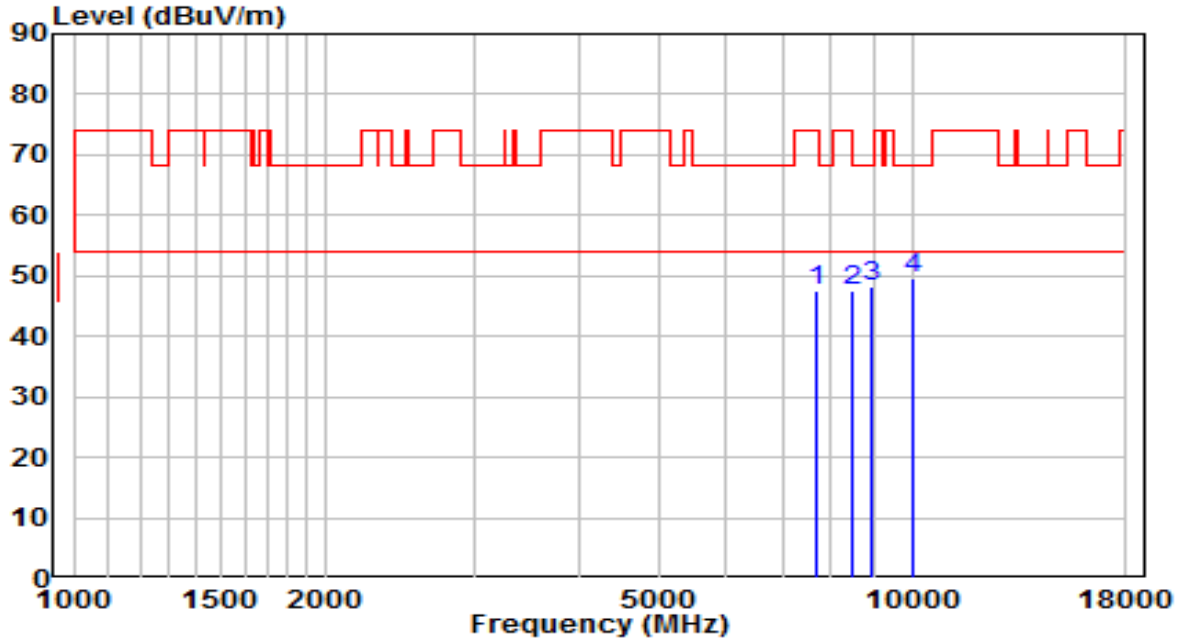


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7715.000	34.33	13.19	47.52	-26.48	74.00	Peak
2	8454.500	33.93	13.63	47.57	-26.43	74.00	Peak
3	8922.000	33.43	14.69	48.12	-20.08	68.20	Peak
4	* 10027.000	33.00	16.67	49.67	-18.53	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5500MHz	Test Voltage	By PoE

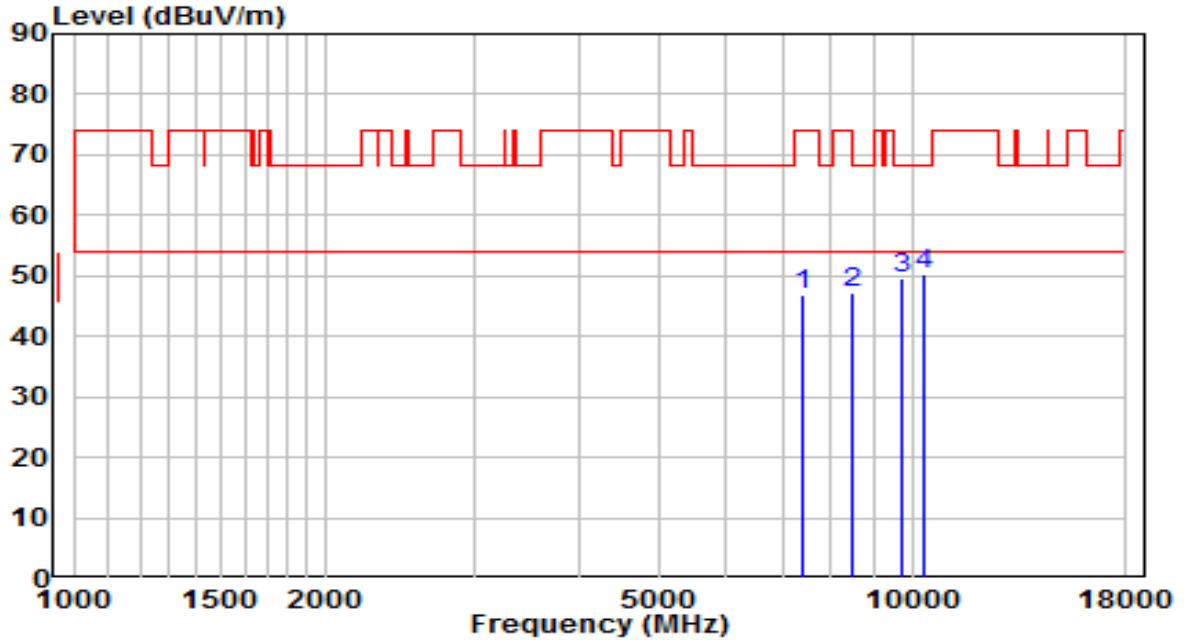


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7400.500	34.23	12.57	46.81	-27.19	74.00	Peak
2	8497.000	33.60	13.65	47.26	-26.74	74.00	Peak
3	9695.500	33.42	16.05	49.47	-18.73	68.20	Peak
4	* 10307.500	32.50	17.80	50.29	-17.91	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5580MHz	Test Voltage	By PoE

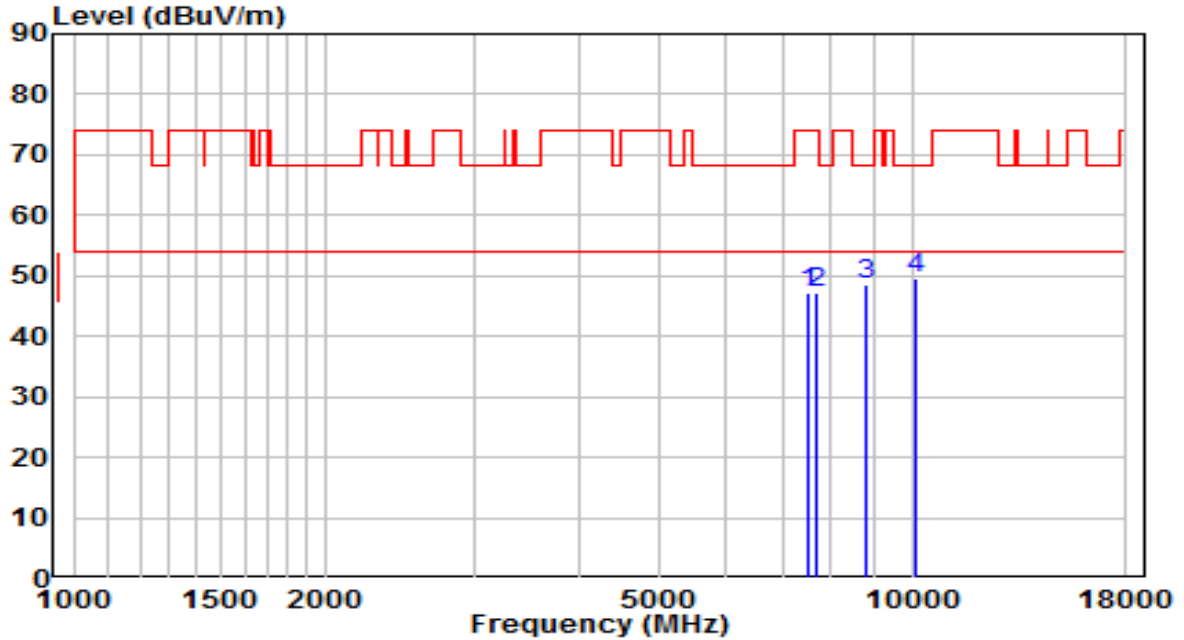


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7536.500	34.05	13.05	47.10	-26.90	74.00	Peak
2	7689.500	33.92	13.17	47.10	-26.90	74.00	Peak
3	8786.000	34.20	14.36	48.56	-19.64	68.20	Peak
4	* 10103.500	32.77	16.98	49.75	-18.45	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5580MHz	Test Voltage	By PoE

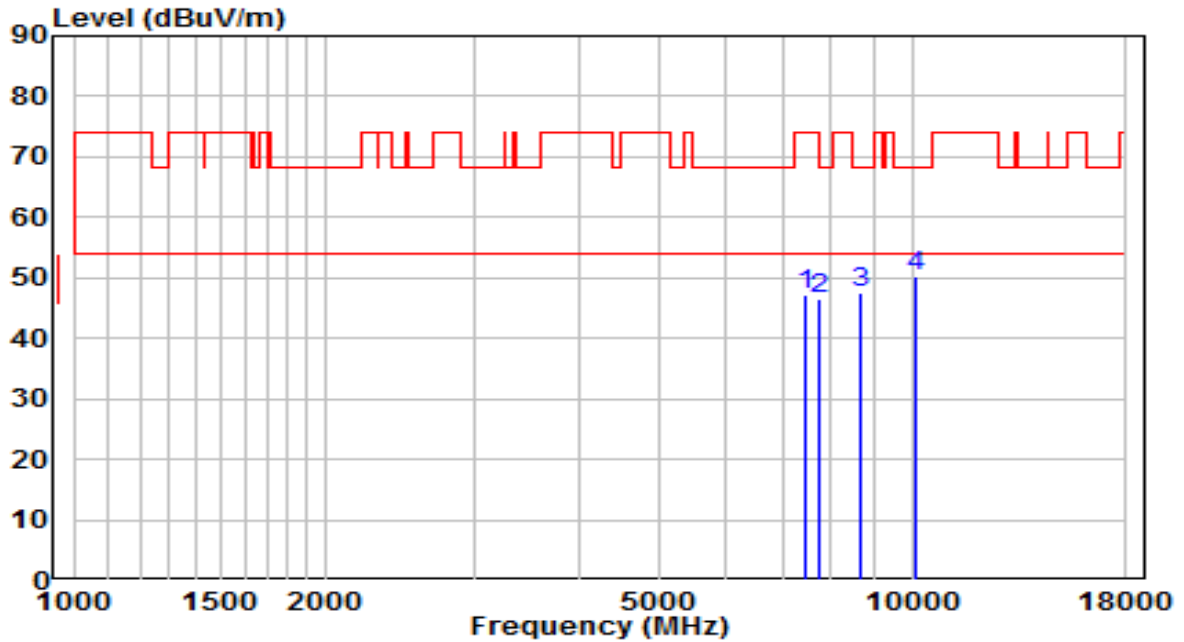


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7451.500	34.34	12.80	47.14	-26.86	74.00	Peak
2	7749.000	33.45	13.22	46.68	-27.32	74.00	Peak
3	8709.500	33.52	14.17	47.69	-20.51	68.20	Peak
4	* 10129.000	33.11	17.08	50.18	-18.02	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5700MHz	Test Voltage	By PoE

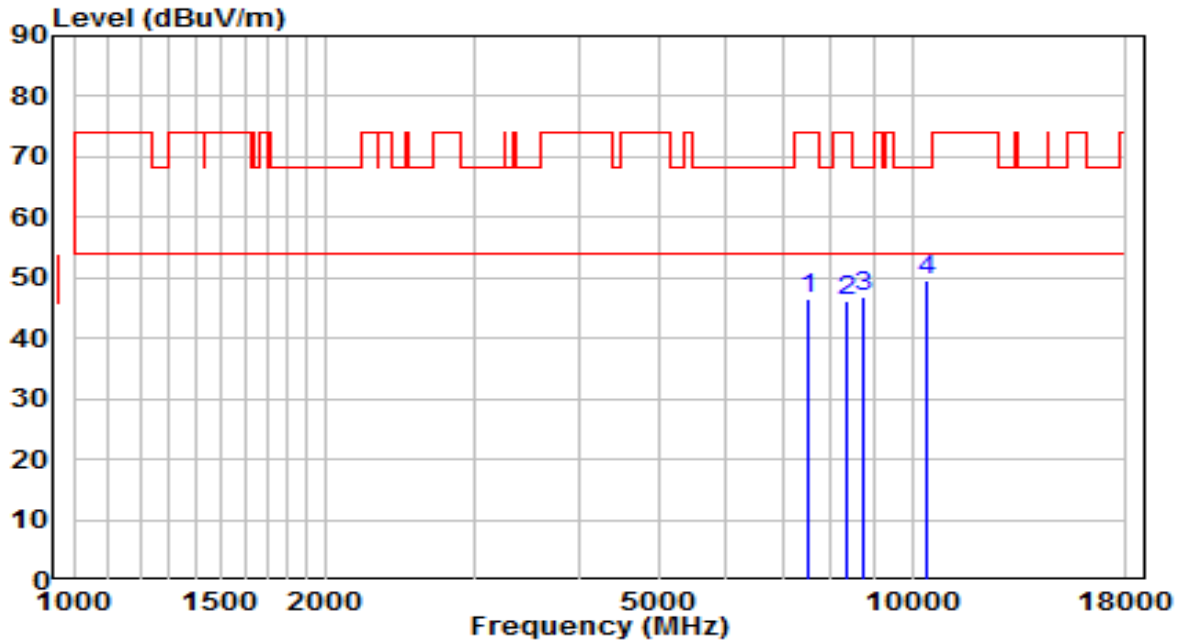


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7536.500	33.44	13.05	46.48	-27.52	74.00	Peak
2	8327.000	32.57	13.58	46.15	-27.85	74.00	Peak
3	8735.000	32.50	14.23	46.74	-21.46	68.20	Peak
4	* 10375.500	31.48	18.07	49.55	-18.65	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5700MHz	Test Voltage	By PoE

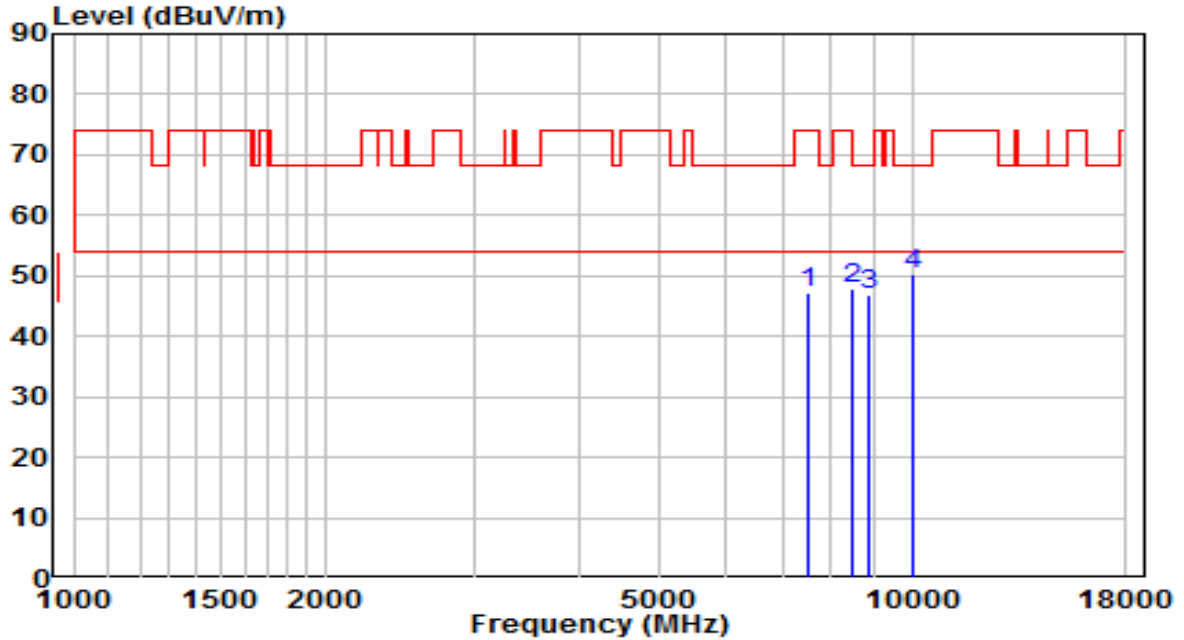


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7494.000	34.06	12.99	47.05	-26.95	74.00	Peak
2	8480.000	34.19	13.65	47.83	-26.17	74.00	Peak
3	8879.500	32.26	14.58	46.85	-21.35	68.20	Peak
4	* 10001.500	33.66	16.57	50.23	-17.97	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5720MHz	Test Voltage	By PoE

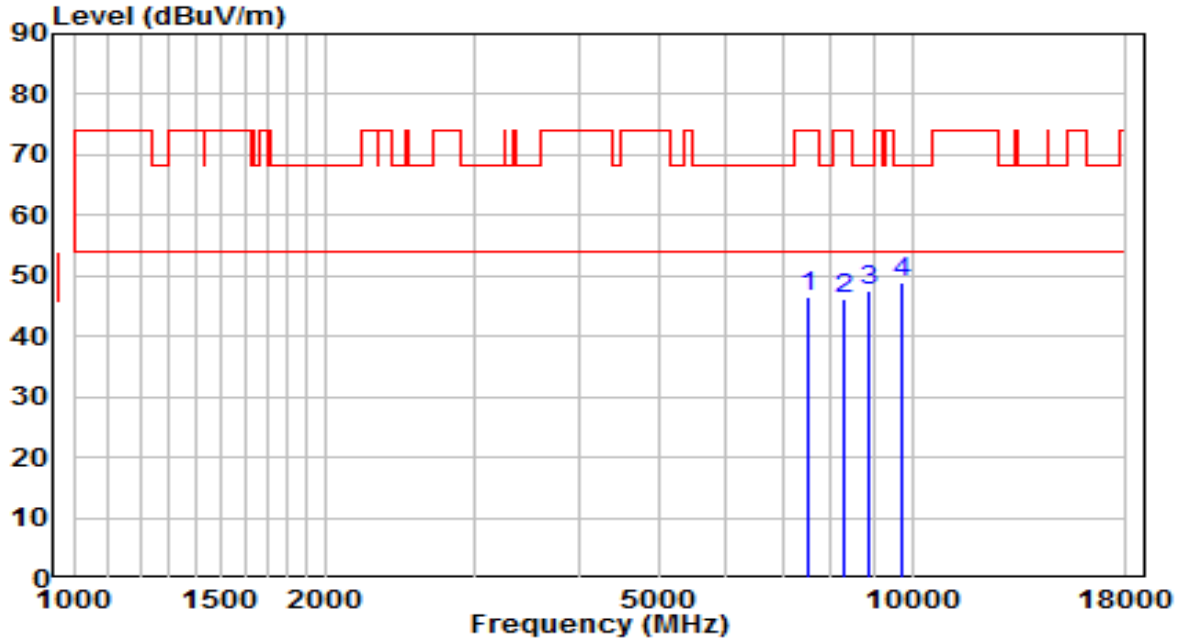


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7519.500	33.66	13.03	46.70	-27.30	74.00	Peak
2	8276.000	32.63	13.55	46.19	-27.81	74.00	Peak
3	8854.000	32.92	14.52	47.44	-20.76	68.20	Peak
4	* 9721.000	32.89	16.09	48.98	-19.22	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5720MHz	Test Voltage	By PoE

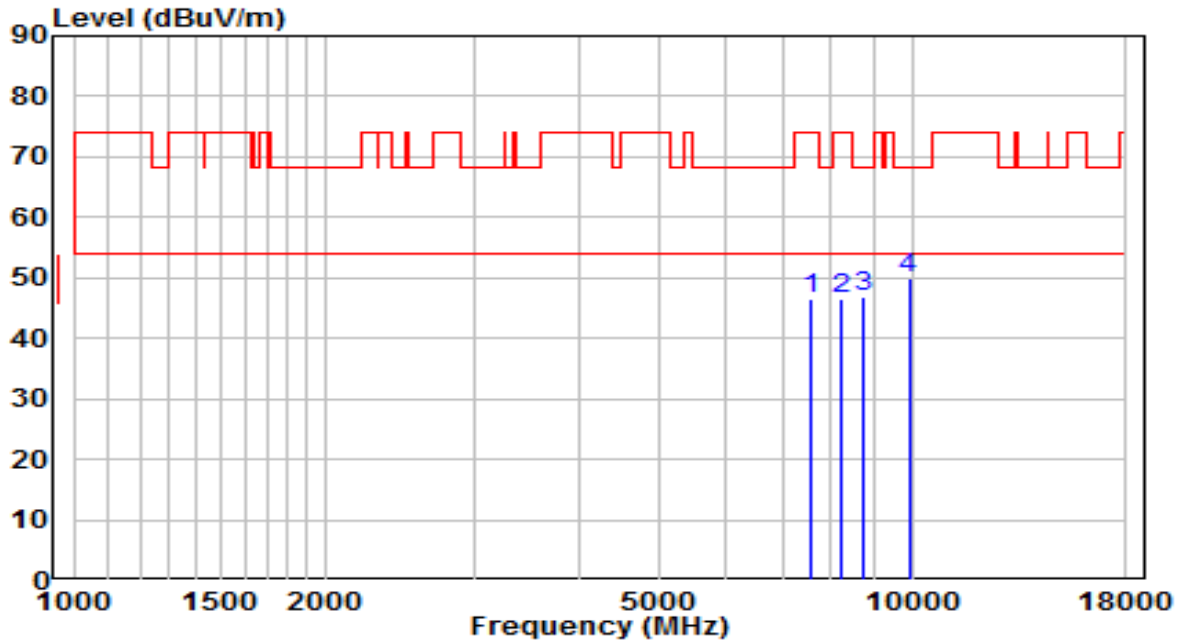


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7562.000	33.63	13.07	46.70	-27.30	74.00	Peak
2	8233.500	32.88	13.54	46.41	-27.59	74.00	Peak
3	8718.000	32.80	14.19	46.99	-21.21	68.20	Peak
4	* 9908.000	33.44	16.41	49.85	-18.35	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5745MHz	Test Voltage	By PoE

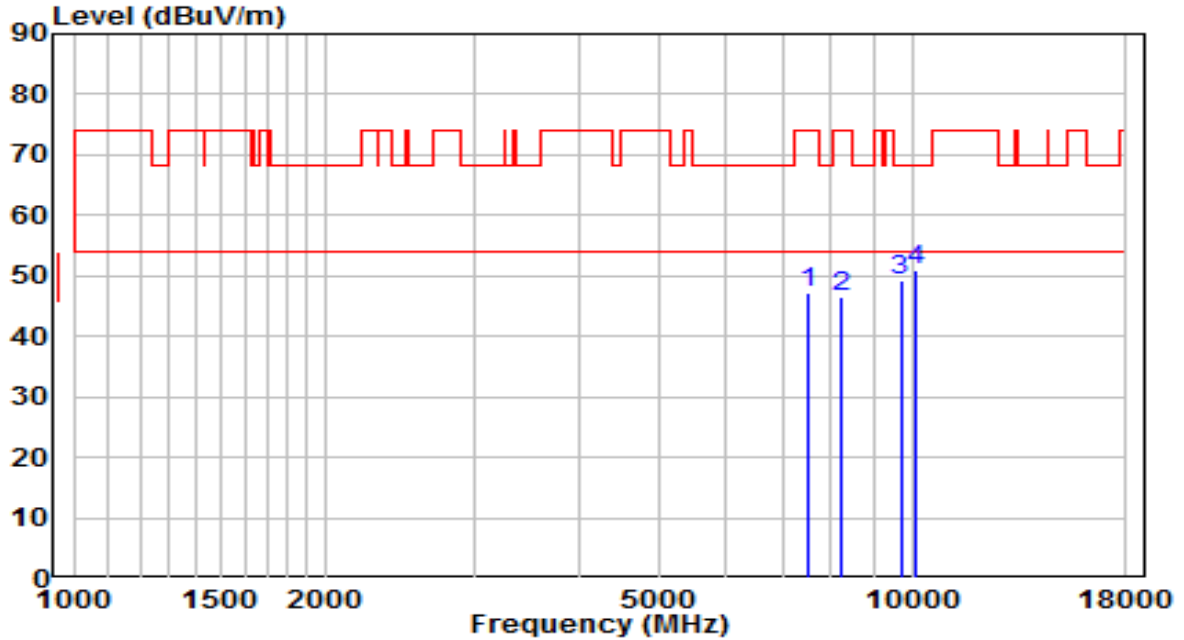


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7502.500	34.25	13.02	47.26	-26.74	74.00	Peak
2	8233.500	32.88	13.54	46.41	-27.59	74.00	Peak
3	9687.000	33.21	16.03	49.25	-18.95	68.20	Peak
4	* 10129.000	33.75	17.08	50.82	-17.38	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5745MHz	Test Voltage	By PoE

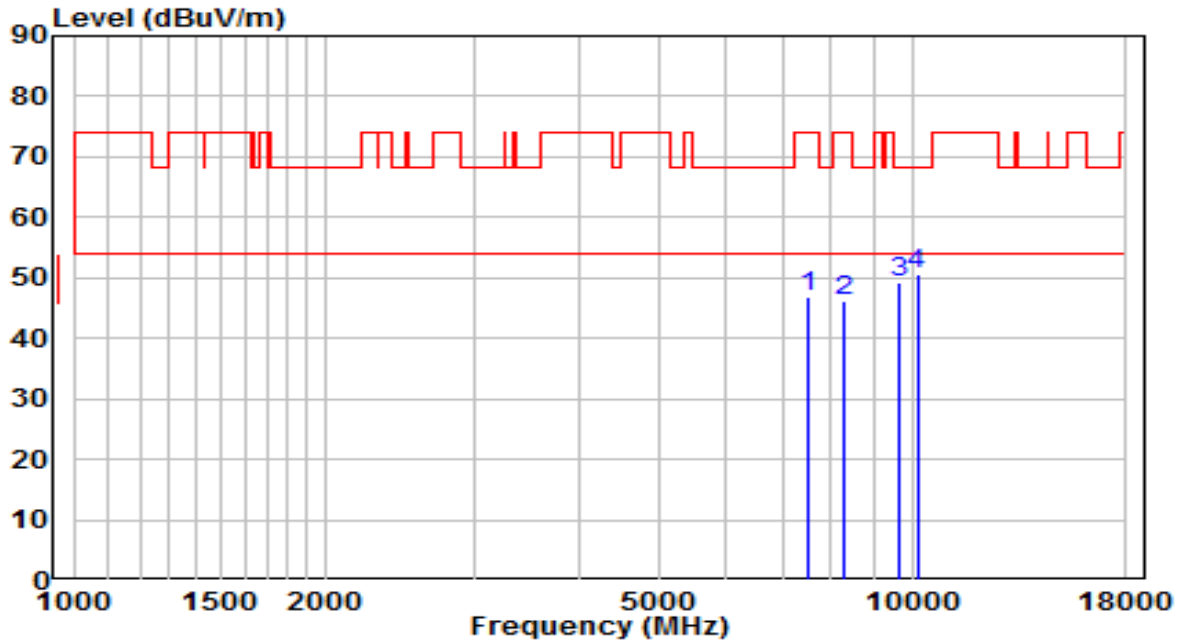


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7494.000	33.95	12.99	46.94	-27.06	74.00	Peak
2	8293.000	32.64	13.56	46.20	-27.80	74.00	Peak
3	9661.500	33.38	15.99	49.37	-18.83	68.20	Peak
4	* 10137.500	33.48	17.11	50.59	-17.61	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5785MHz	Test Voltage	By PoE

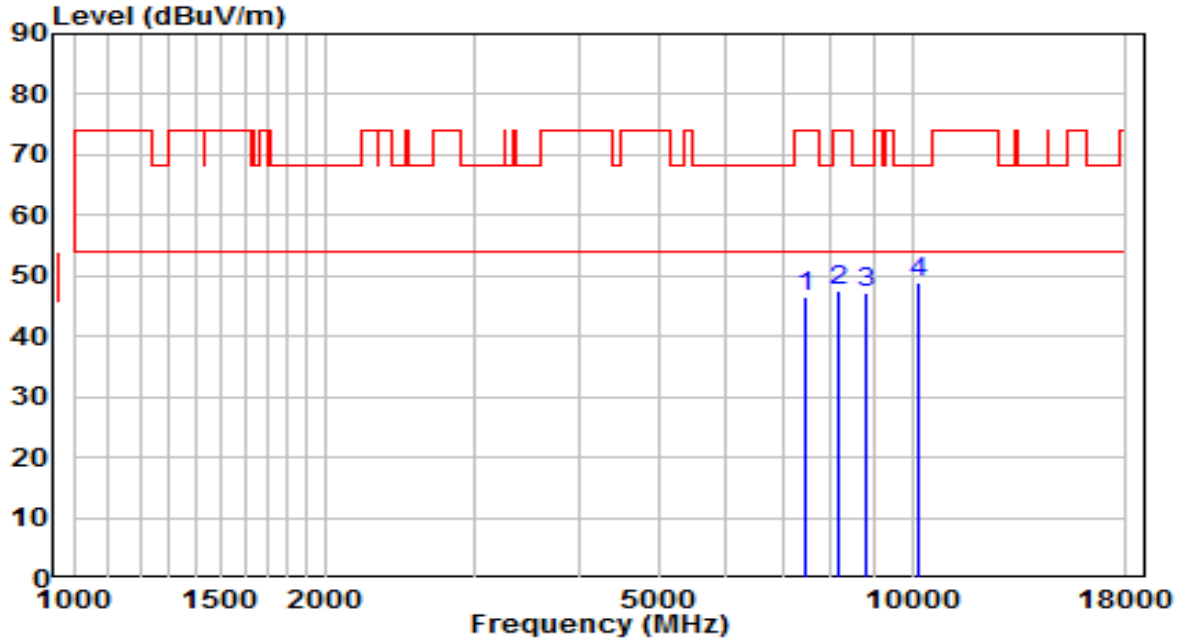


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7451.500	33.58	12.80	46.38	-27.62	74.00	Peak
2	8191.000	33.92	13.52	47.43	-26.57	74.00	Peak
3	8786.000	32.83	14.36	47.18	-21.02	68.20	Peak
4	* 10163.000	31.84	17.22	49.05	-19.15	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5785MHz	Test Voltage	By PoE

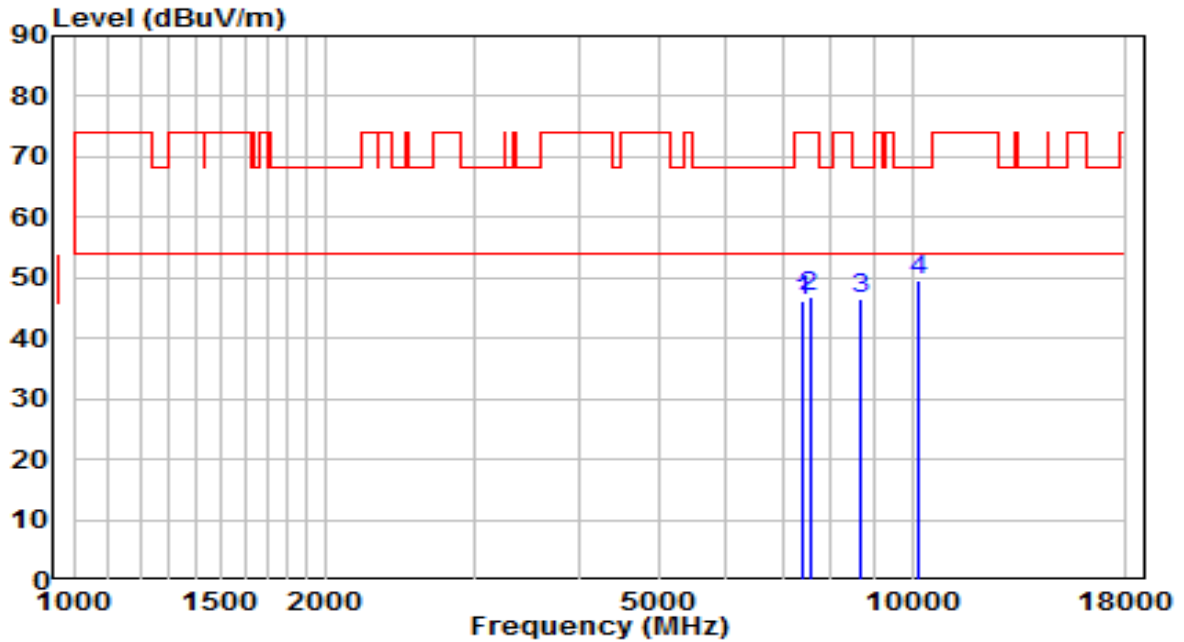


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7417.500	33.46	12.65	46.11	-27.89	74.00	Peak
2	7545.000	33.83	13.05	46.88	-27.12	74.00	Peak
3	8675.500	32.48	14.08	46.57	-21.63	68.20	Peak
4	* 10154.500	32.37	17.18	49.55	-18.65	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5825MHz	Test Voltage	By PoE

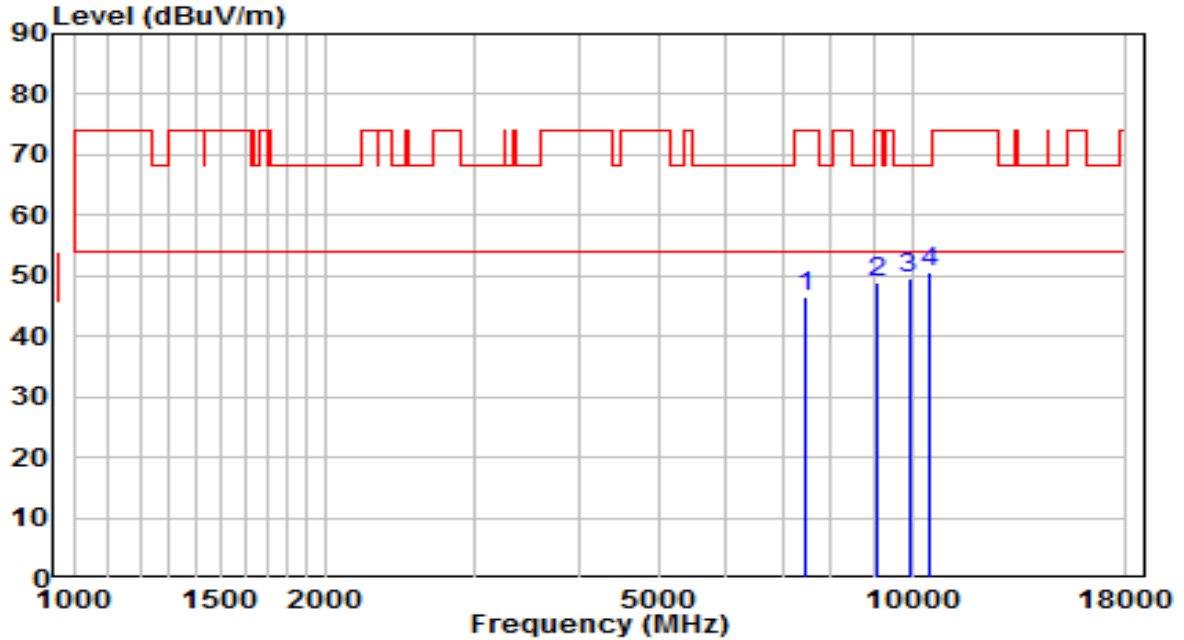


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7468.500	33.74	12.88	46.61	-27.39	74.00	Peak
2	9075.000	33.94	15.01	48.95	-25.05	74.00	Peak
3	9908.000	33.21	16.41	49.62	-18.58	68.20	Peak
4	* 10494.500	31.91	18.55	50.46	-17.74	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at channel 5825MHz	Test Voltage	By PoE

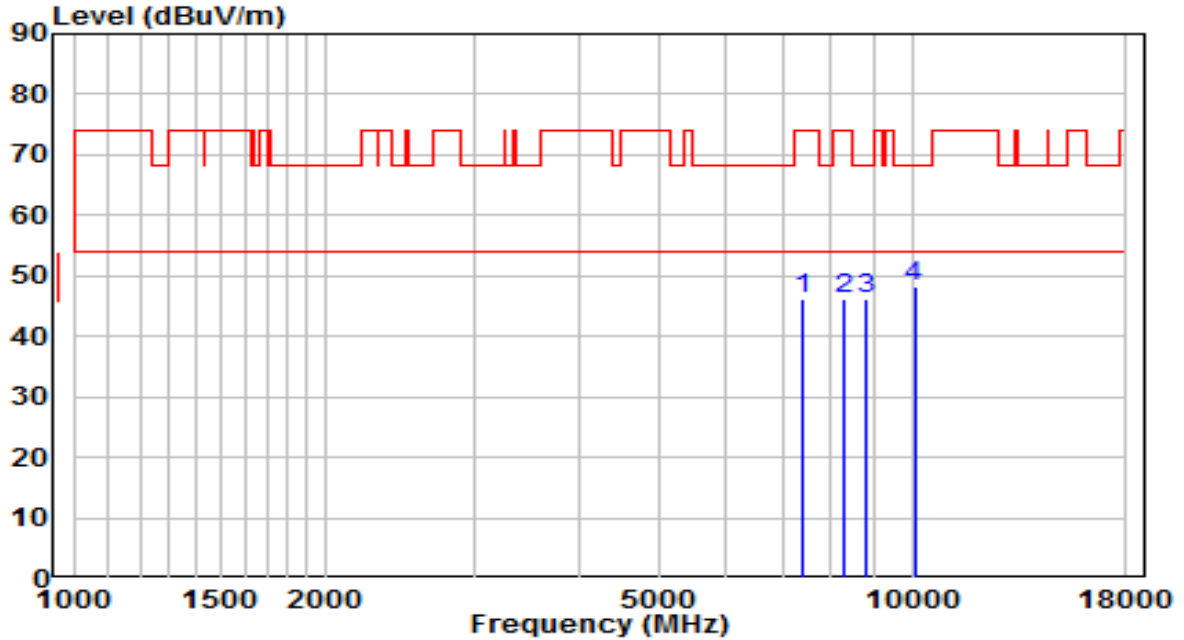


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7426.000	33.50	12.69	46.19	-27.81	74.00	Peak
2	8310.000	32.58	13.57	46.15	-27.85	74.00	Peak
3	8794.500	31.87	14.38	46.24	-21.96	68.20	Peak
4	* 10061.000	31.31	16.81	48.12	-20.08	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5180MHz	Test Voltage	By PoE

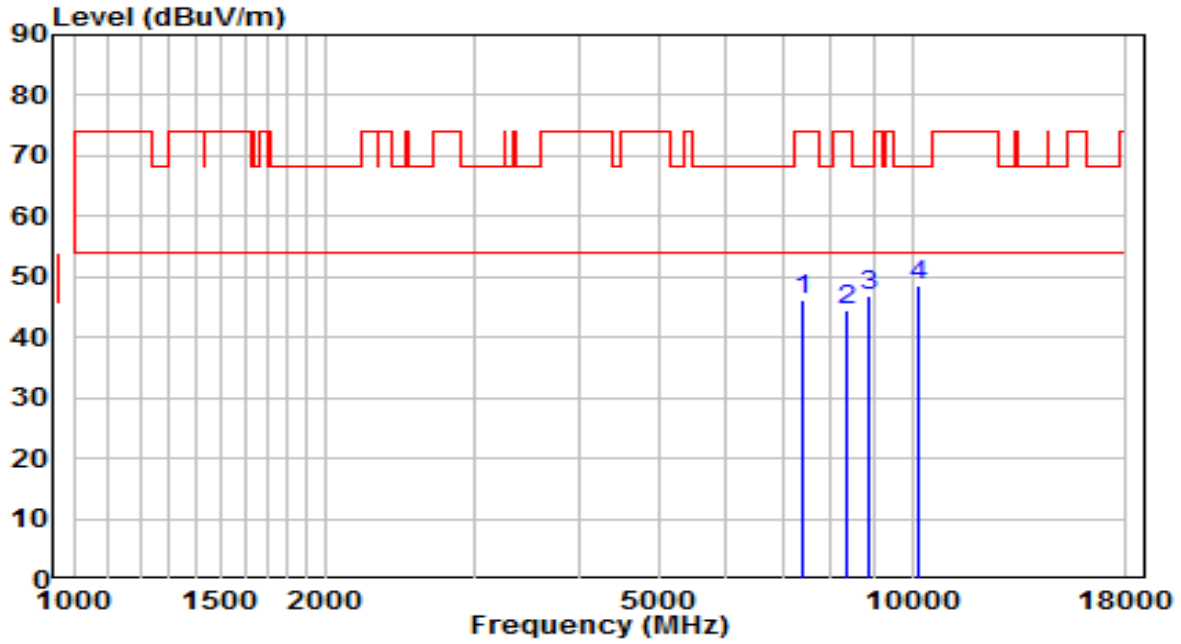


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7383.500	33.62	12.50	46.11	-27.89	74.00	Peak
2	8361.000	30.86	13.59	44.46	-29.55	74.00	Peak
3	8888.000	32.17	14.61	46.78	-21.42	68.20	Peak
4	* 10171.500	31.30	17.25	48.55	-19.65	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5180MHz	Test Voltage	By PoE

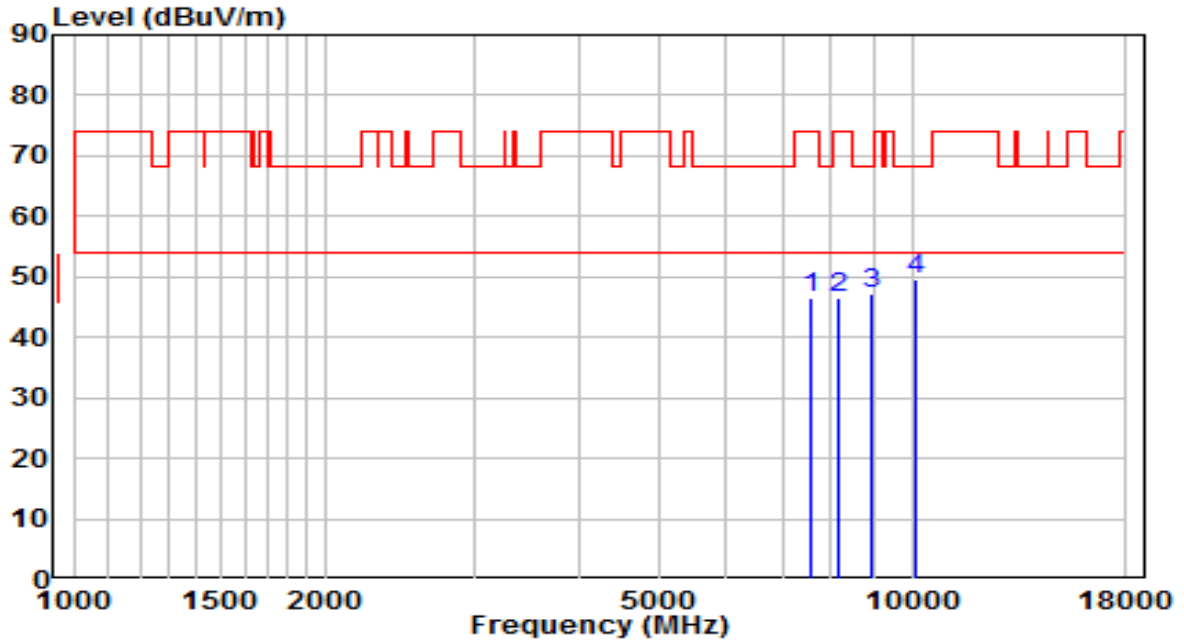


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7570.500	33.60	13.07	46.68	-27.32	74.00	Peak
2	8191.000	33.09	13.52	46.60	-27.40	74.00	Peak
3	8964.500	32.51	14.79	47.31	-20.89	68.20	Peak
4	* 10129.000	32.44	17.08	49.52	-18.68	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5220MHz	Test Voltage	By PoE

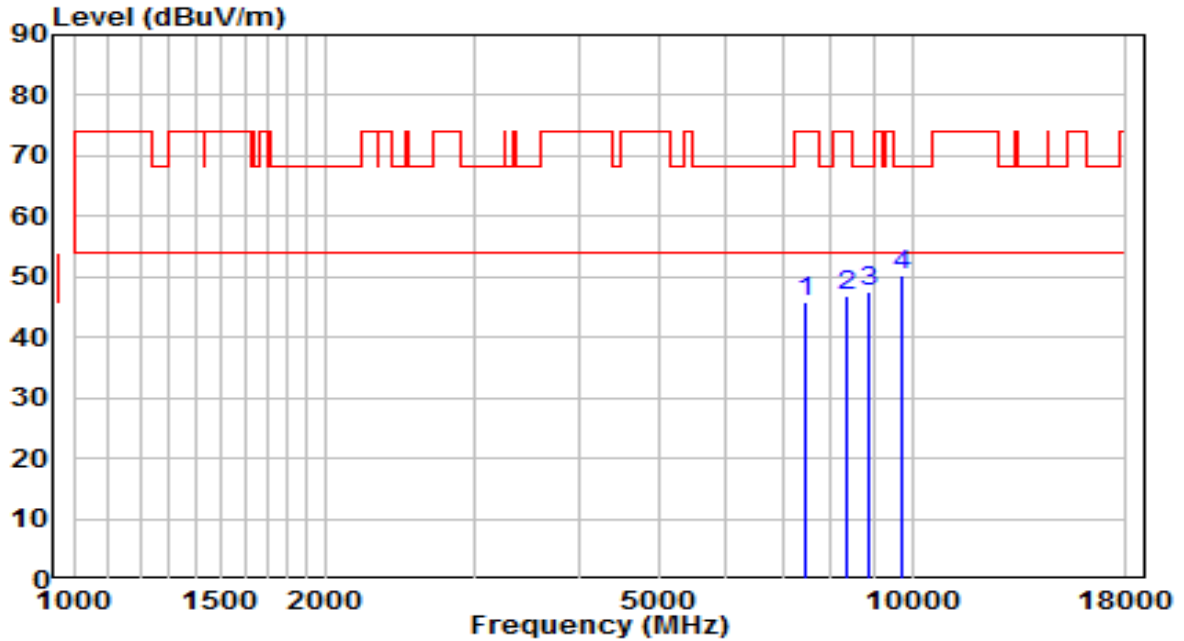


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7485.500	33.05	12.95	46.00	-28.00	74.00	Peak
2	8386.500	33.19	13.60	46.80	-27.20	74.00	Peak
3	8879.500	32.79	14.58	47.38	-20.82	68.20	Peak
4	* 9729.500	34.17	16.11	50.27	-17.93	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5220MHz	Test Voltage	By PoE

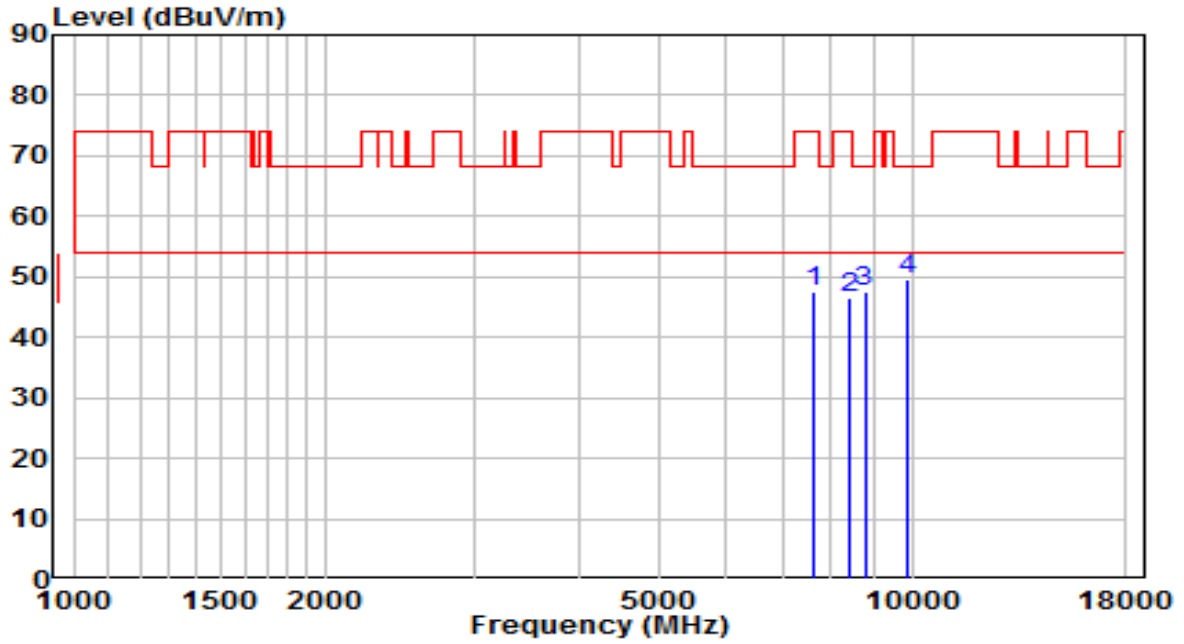


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7621.500	34.55	13.12	47.67	-26.33	74.00	Peak
2	8412.000	32.84	13.62	46.45	-27.55	74.00	Peak
3	8777.500	33.19	14.33	47.52	-20.68	68.20	Peak
4	* 9874.000	33.14	16.35	49.49	-18.71	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5240MHz	Test Voltage	By PoE

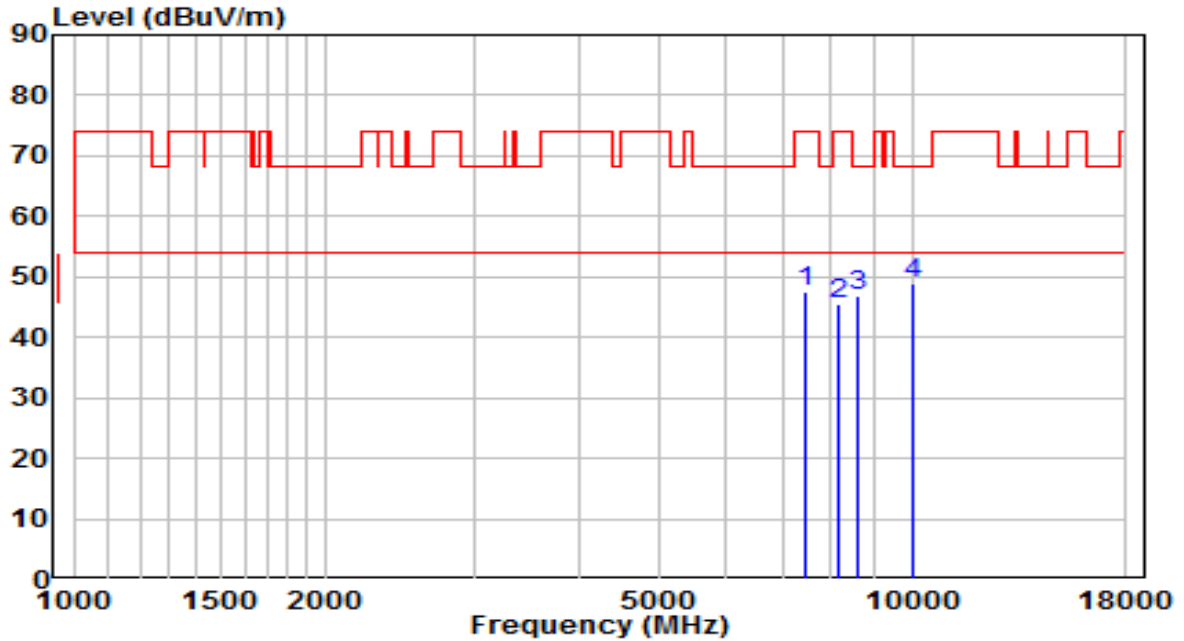


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7443.000	34.73	12.76	47.49	-26.51	74.00	Peak
2	8148.500	31.91	13.50	45.41	-28.59	74.00	Peak
3	8641.500	32.75	14.00	46.75	-21.45	68.20	Peak
4	* 10001.500	32.50	16.57	49.07	-19.13	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5240MHz	Test Voltage	By PoE

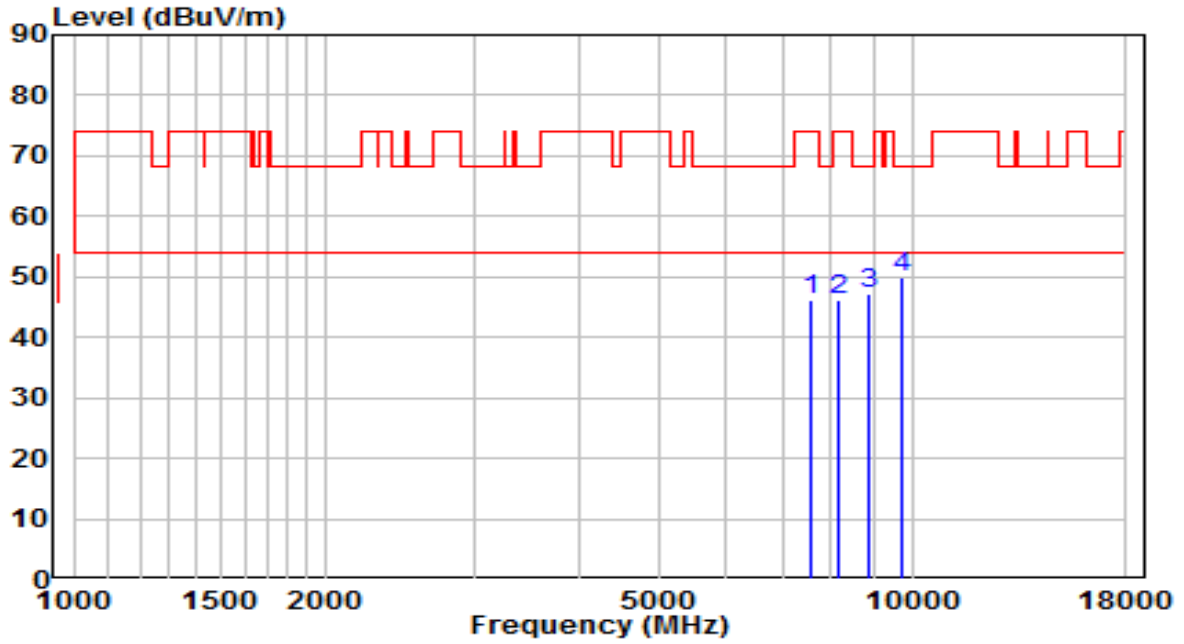


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7553.500	33.13	13.06	46.19	-27.81	74.00	Peak
2	8148.500	32.63	13.50	46.13	-27.87	74.00	Peak
3	8879.500	32.55	14.58	47.14	-21.06	68.20	Peak
4	* 9721.000	33.95	16.09	50.04	-18.16	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5260MHz	Test Voltage	By PoE

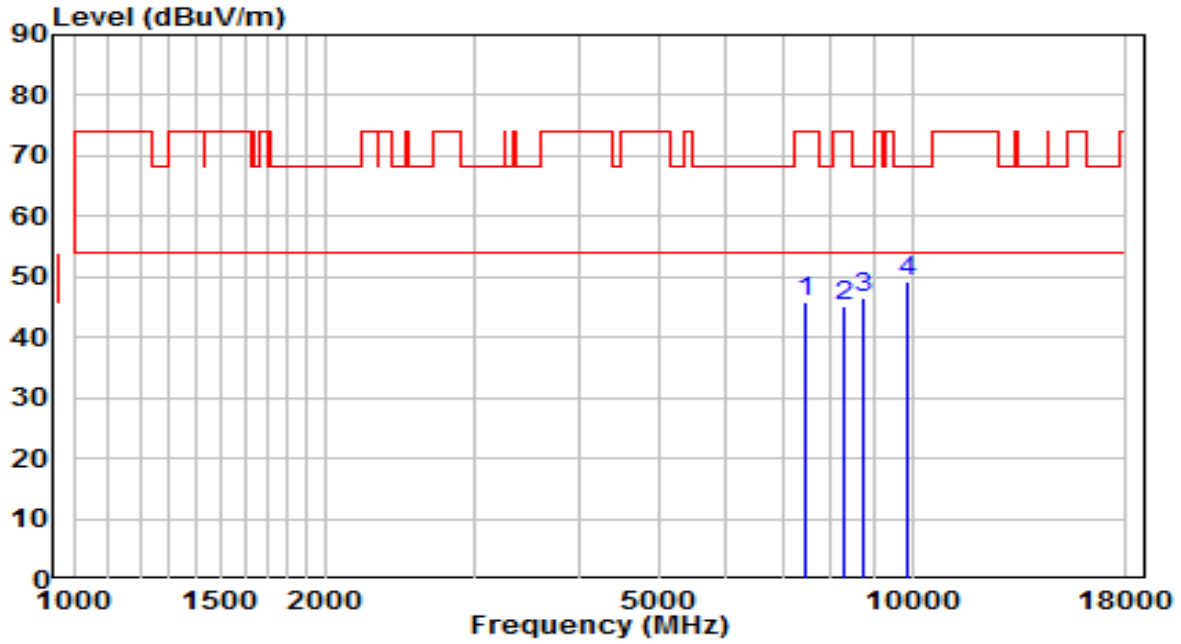


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7468.500	33.09	12.88	45.97	-28.03	74.00	Peak
2	8293.000	31.45	13.56	45.01	-28.99	74.00	Peak
3	8760.500	32.18	14.29	46.47	-21.73	68.20	Peak
4	* 9891.000	32.87	16.38	49.25	-18.95	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5260MHz	Test Voltage	By PoE

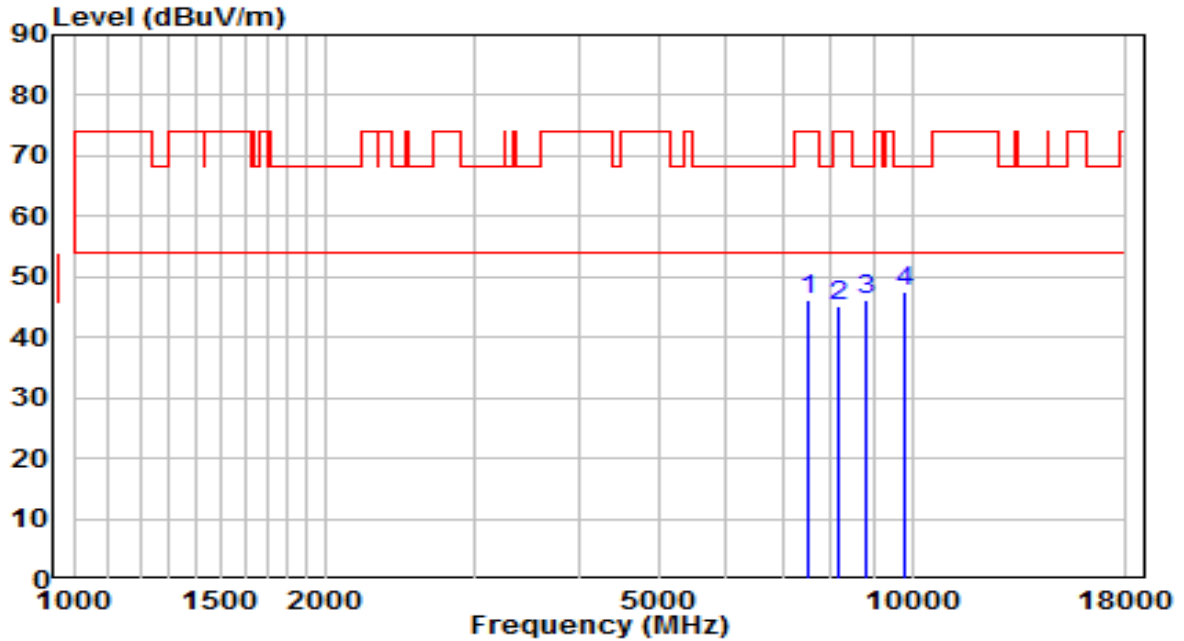


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7502.500	33.22	13.02	46.24	-27.76	74.00	Peak
2	8148.500	31.56	13.50	45.05	-28.95	74.00	Peak
3	8828.500	31.65	14.46	46.11	-22.09	68.20	Peak
4	* 9772.000	31.52	16.18	47.69	-20.51	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5320MHz	Test Voltage	By PoE

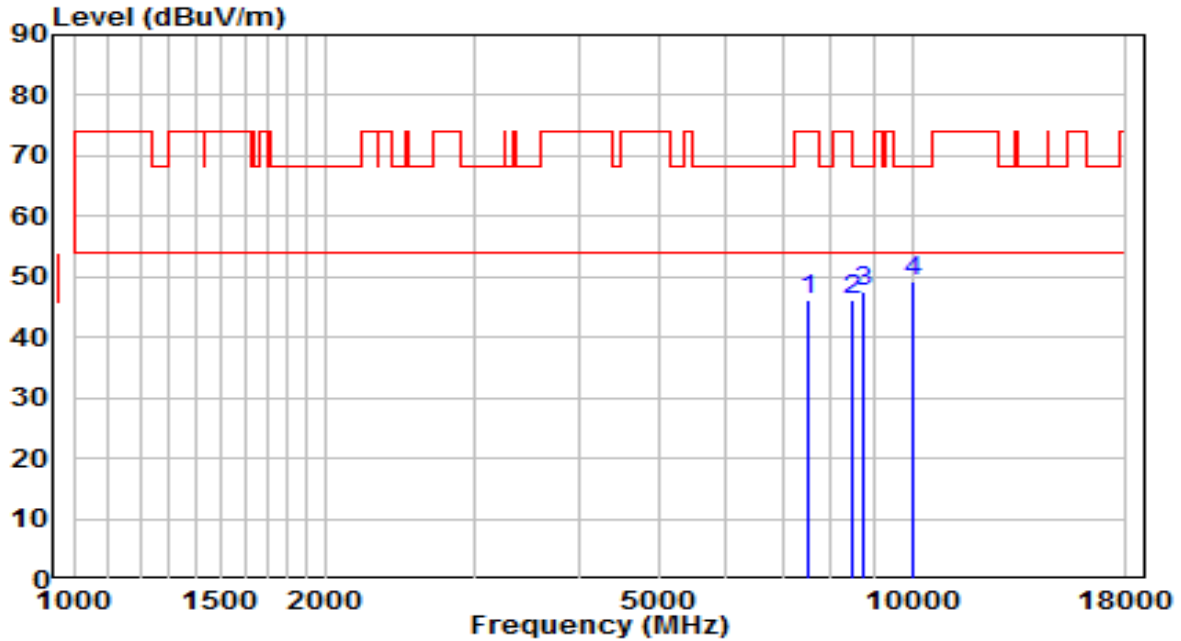


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7519.500	33.26	13.03	46.29	-27.71	74.00	Peak
2	8454.500	32.64	13.63	46.27	-27.73	74.00	Peak
3	8718.000	33.31	14.19	47.50	-20.70	68.20	Peak
4	* 10035.500	32.48	16.70	49.19	-19.01	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5320MHz	Test Voltage	By PoE

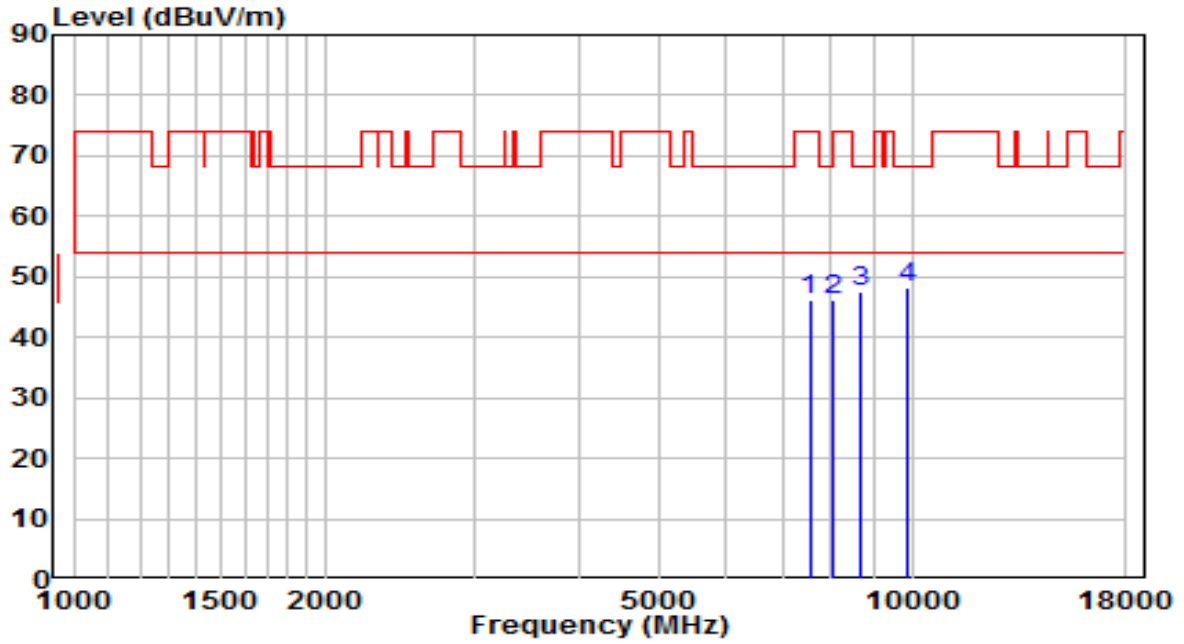


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7545.000	33.28	13.05	46.33	-27.67	74.00	Peak
2	8072.000	32.56	13.46	46.03	-27.97	74.00	Peak
3	8709.500	33.36	14.17	47.52	-20.68	68.20	Peak
4	* 9882.500	31.88	16.36	48.24	-19.96	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5500MHz	Test Voltage	By PoE

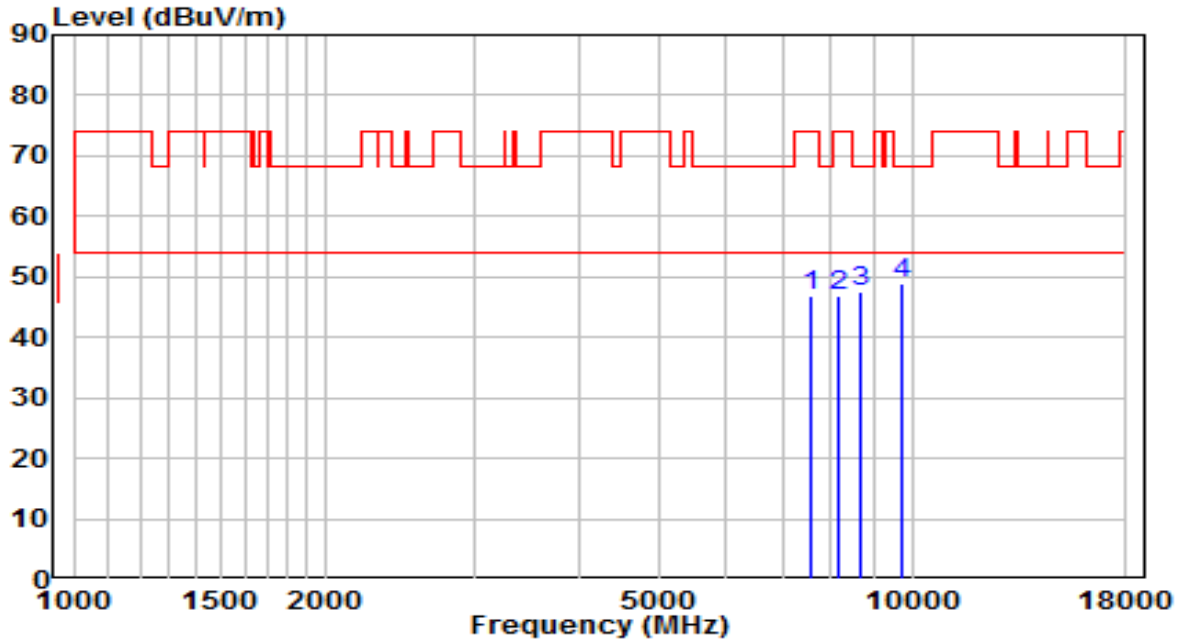


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7587.500	33.64	13.09	46.73	-27.27	74.00	Peak
2	8165.500	33.42	13.50	46.92	-27.08	74.00	Peak
3	8658.500	33.67	14.04	47.72	-20.48	68.20	Peak
4	* 9738.000	32.78	16.12	48.90	-19.30	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5500MHz	Test Voltage	By PoE

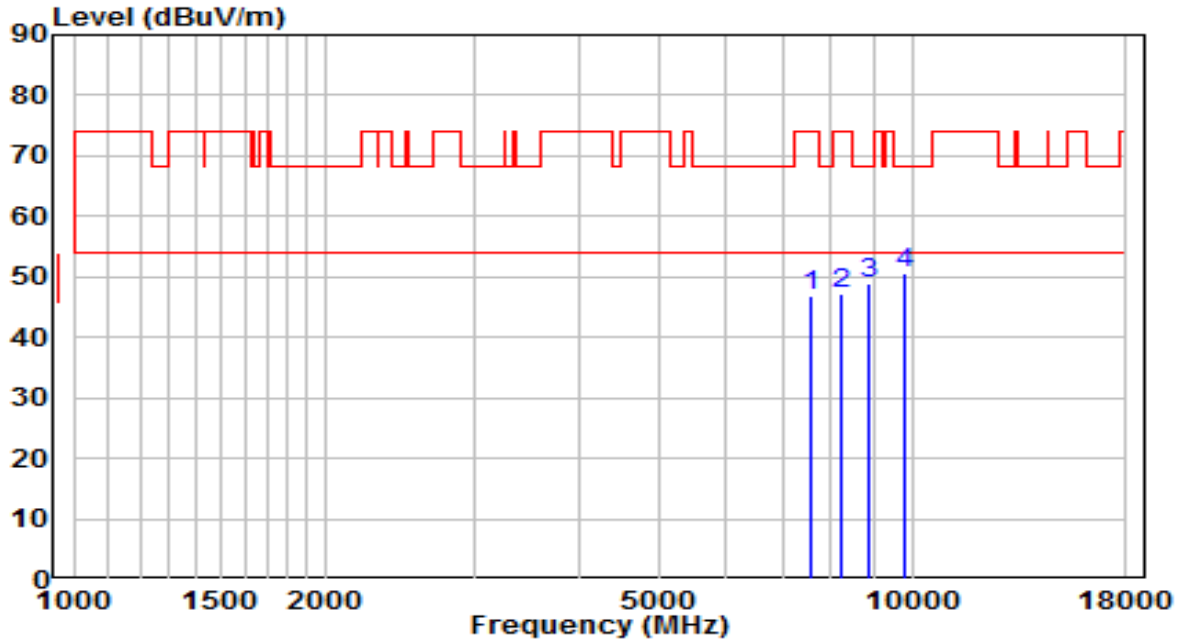


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7553.500	33.86	13.06	46.92	-27.08	74.00	Peak
2	8250.500	33.78	13.54	47.32	-26.68	74.00	Peak
3	8896.500	34.32	14.63	48.94	-19.26	68.20	Peak
4	* 9780.500	34.38	16.19	50.57	-17.63	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5580MHz	Test Voltage	By PoE

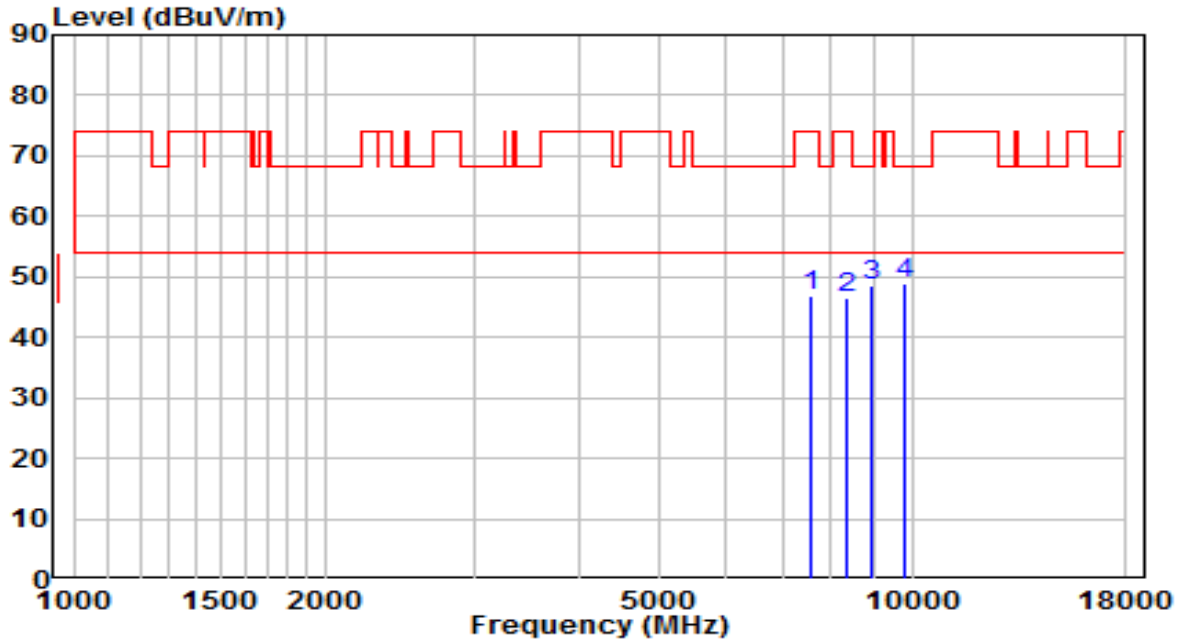


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7587.500	33.88	13.09	46.96	-27.04	74.00	Peak
2	8378.000	32.89	13.60	46.49	-27.51	74.00	Peak
3	8956.000	33.70	14.77	48.48	-19.72	68.20	Peak
4	* 9780.500	32.60	16.19	48.80	-19.40	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5580MHz	Test Voltage	By PoE

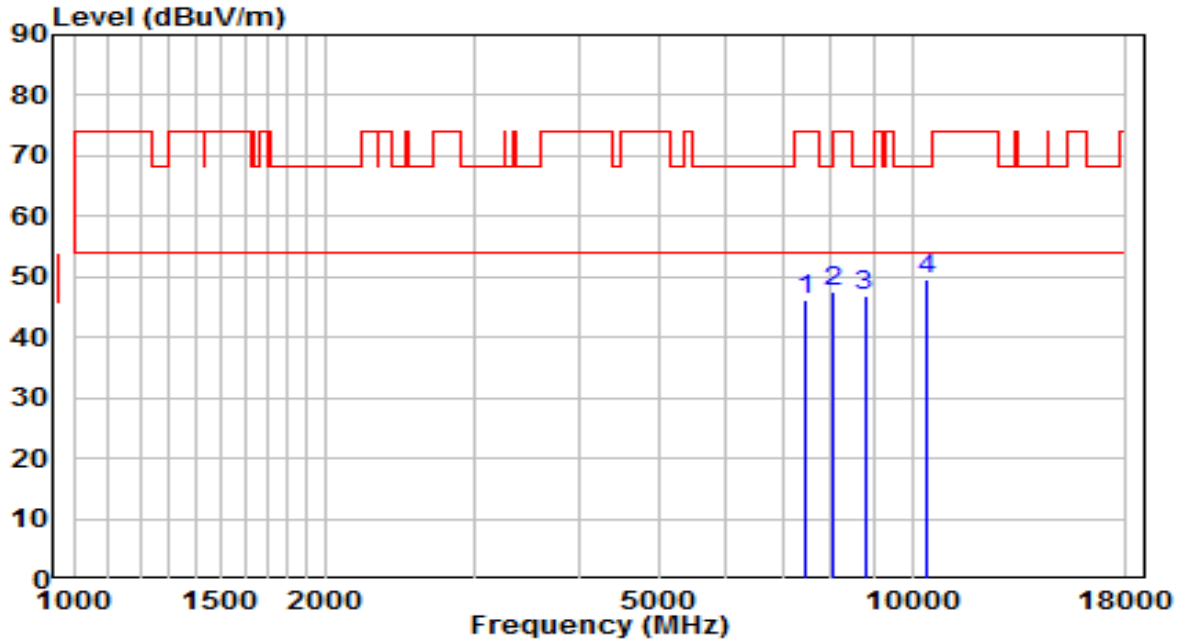


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7477.000	33.20	12.91	46.11	-27.89	74.00	Peak
2	8038.000	34.24	13.45	47.69	-26.31	74.00	Peak
3	8777.500	32.40	14.33	46.73	-21.47	68.20	Peak
4	* 10409.500	31.40	18.21	49.60	-18.60	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5700MHz	Test Voltage	By PoE

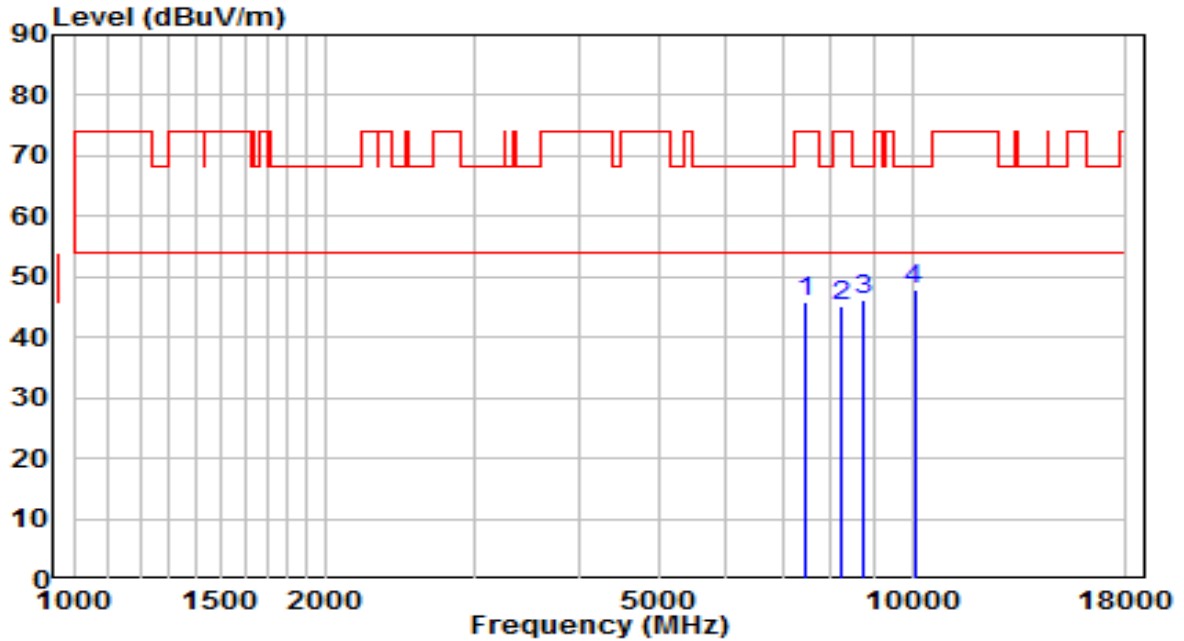


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7477.000	32.98	12.91	45.89	-28.11	74.00	Peak
2	8250.500	31.59	13.54	45.13	-28.87	74.00	Peak
3	8760.500	31.87	14.29	46.16	-22.04	68.20	Peak
4	* 10061.000	31.04	16.81	47.85	-20.35	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5700MHz	Test Voltage	By PoE

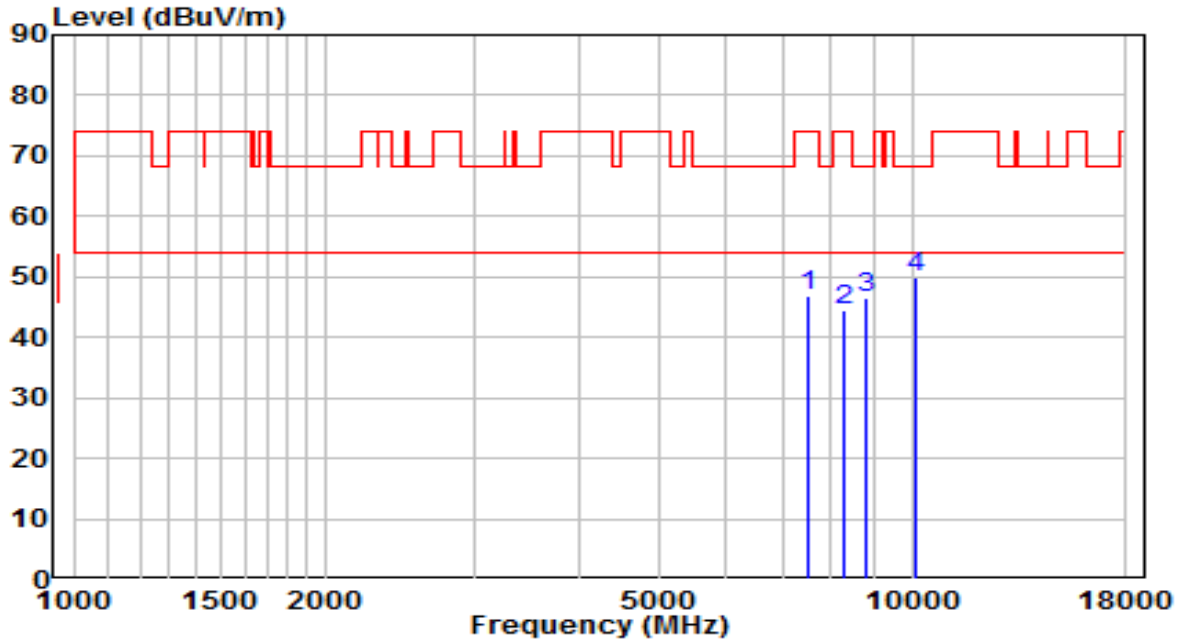


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7511.000	33.68	13.02	46.70	-27.30	74.00	Peak
2	8267.500	31.07	13.55	44.62	-29.38	74.00	Peak
3	8828.500	32.03	14.46	46.49	-21.71	68.20	Peak
4	* 10129.000	33.00	17.08	50.08	-18.12	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5720MHz	Test Voltage	By PoE

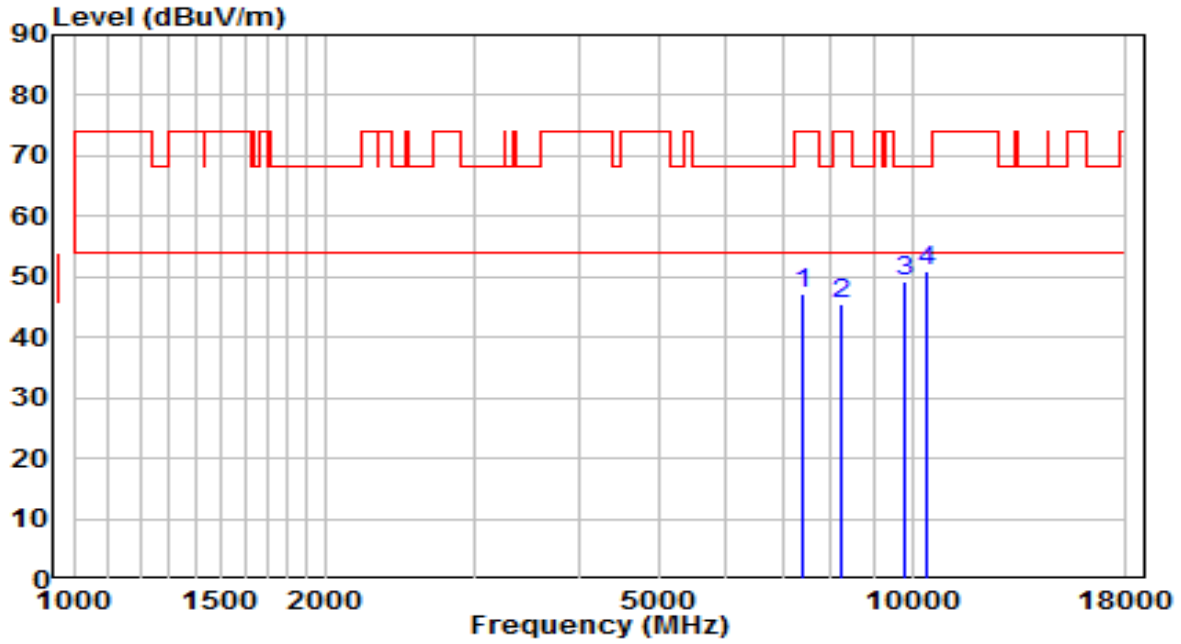


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7417.500	34.56	12.65	47.21	-26.79	74.00	Peak
2	8250.500	31.85	13.54	45.39	-28.61	74.00	Peak
3	9823.000	32.97	16.26	49.23	-18.97	68.20	Peak
4	* 10435.000	32.48	18.31	50.79	-17.41	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5720MHz	Test Voltage	By PoE

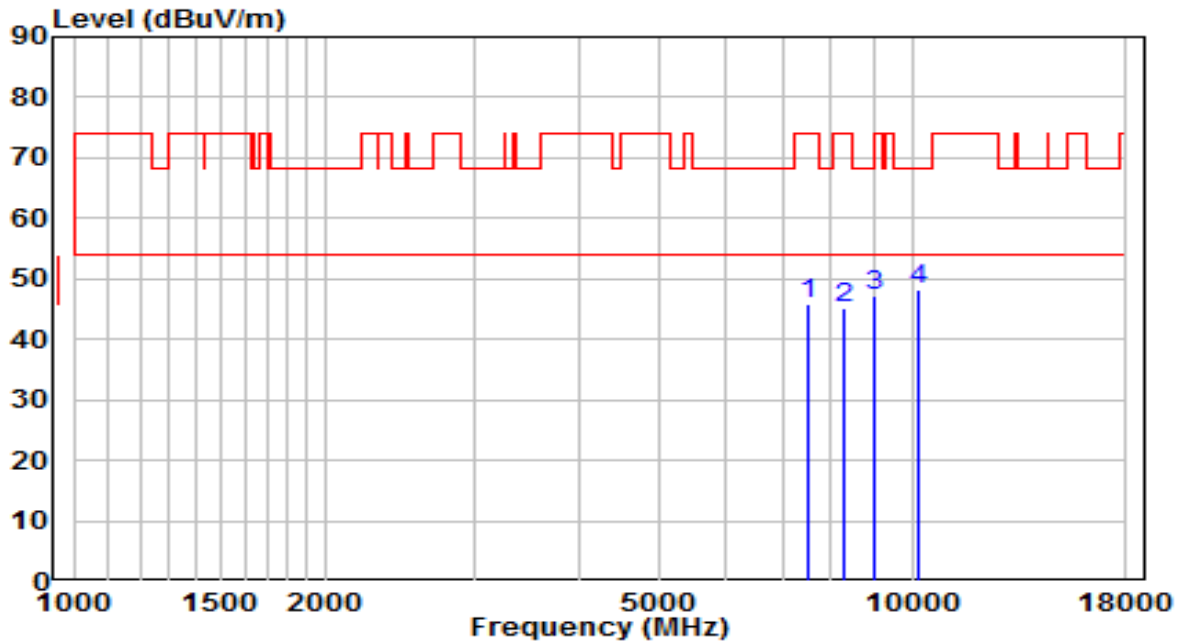


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7502.500	32.86	13.02	45.88	-28.12	74.00	Peak
2	8310.000	31.44	13.57	45.01	-28.99	74.00	Peak
3	8981.500	32.41	14.83	47.24	-20.96	68.20	Peak
4	* 10188.500	30.80	17.32	48.12	-20.08	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5745MHz	Test Voltage	By PoE

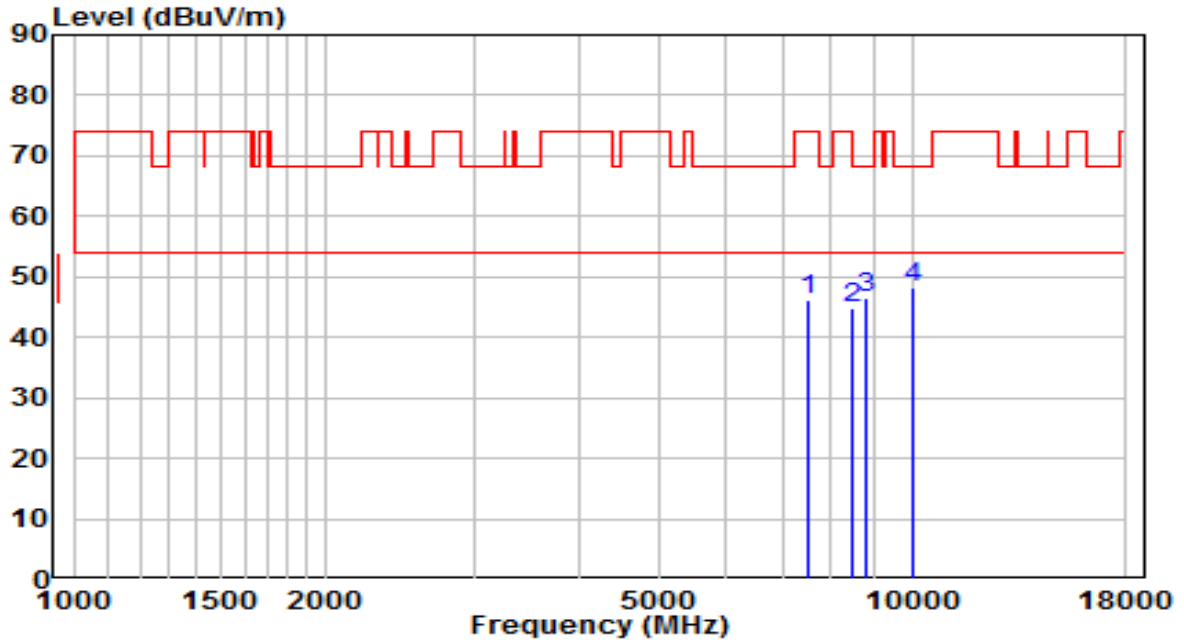


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7494.000	33.19	12.99	46.18	-27.82	74.00	Peak
2	8463.000	31.15	13.64	44.79	-29.21	74.00	Peak
3	8828.500	32.04	14.46	46.50	-21.70	68.20	Peak
4	* 10001.500	31.69	16.57	48.26	-19.94	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5745MHz	Test Voltage	By PoE

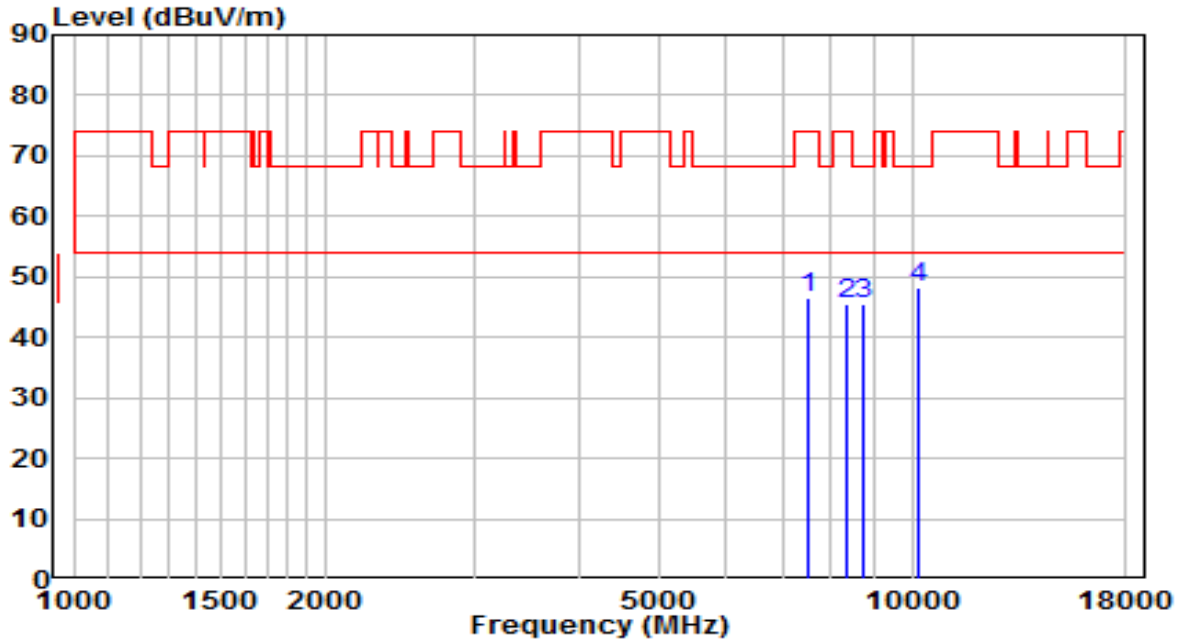


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7494.000	33.41	12.99	46.40	-27.60	74.00	Peak
2	8327.000	31.98	13.58	45.55	-28.45	74.00	Peak
3	8735.000	31.19	14.23	45.42	-22.78	68.20	Peak
4	* 10188.500	30.91	17.32	48.23	-19.97	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5785MHz	Test Voltage	By PoE

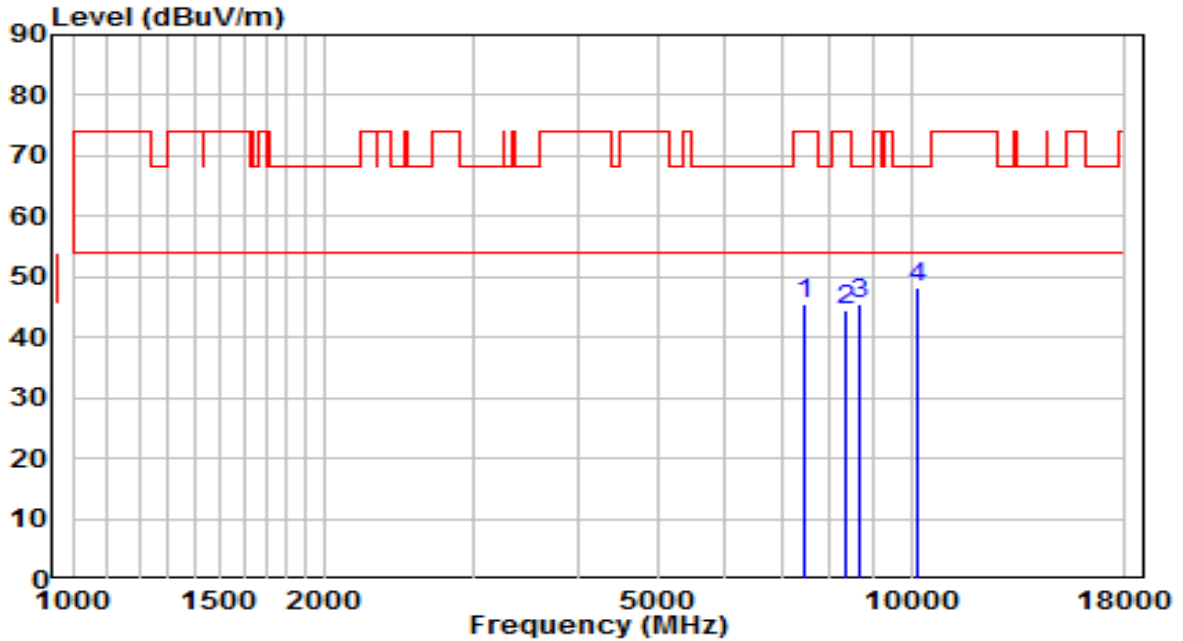


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7443.000	32.74	12.76	45.51	-28.49	74.00	Peak
2	8361.000	31.06	13.59	44.65	-29.35	74.00	Peak
3	8667.000	31.31	14.06	45.37	-22.83	68.20	Peak
4	* 10188.500	30.87	17.32	48.18	-20.02	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5785MHz	Test Voltage	By PoE

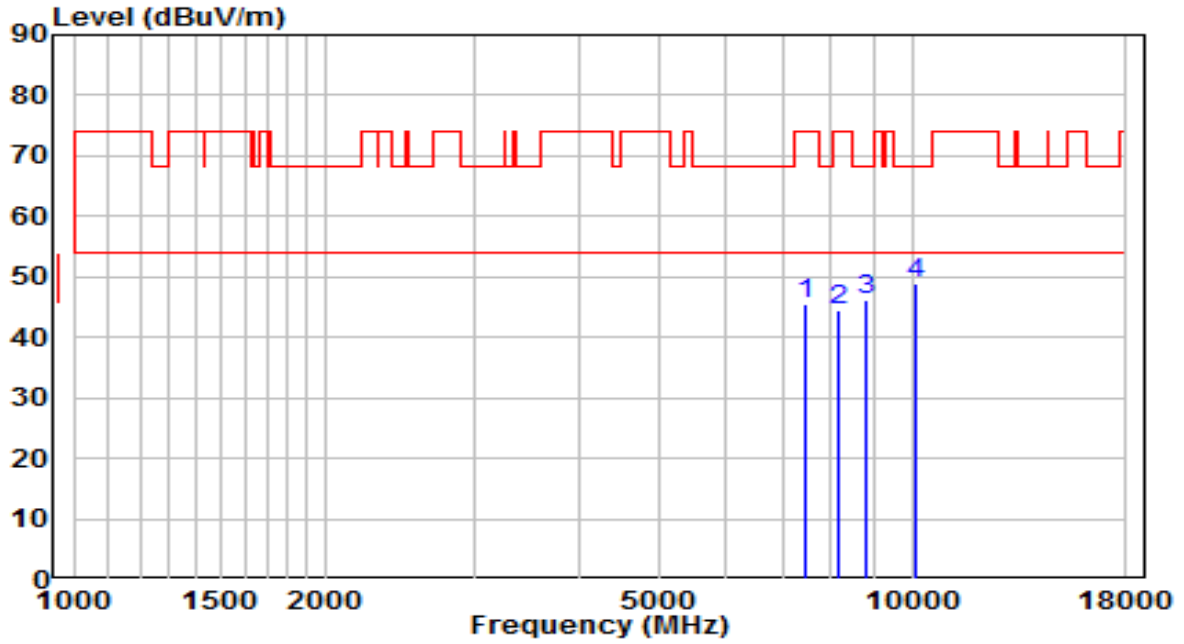


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7460.000	32.57	12.84	45.40	-28.60	74.00	Peak
2	8182.500	30.83	13.51	44.34	-29.66	74.00	Peak
3	8811.500	31.73	14.42	46.14	-22.06	68.20	Peak
4	* 10103.500	31.77	16.98	48.74	-19.46	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5825MHz	Test Voltage	By PoE

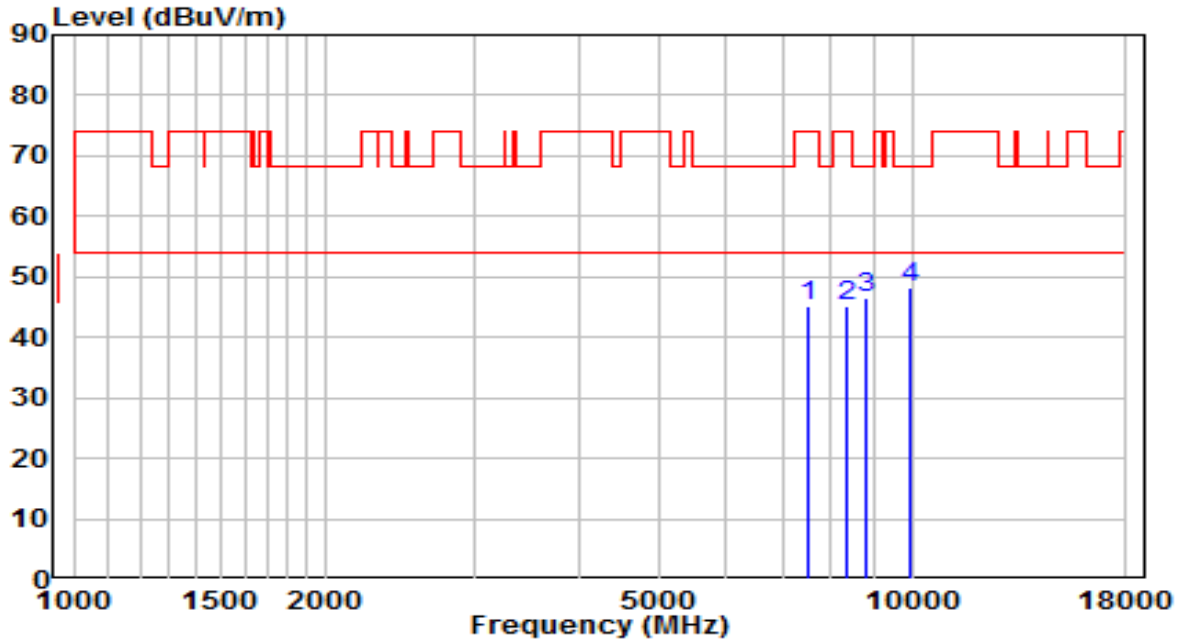


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7502.500	32.22	13.02	45.24	-28.76	74.00	Peak
2	8361.000	31.67	13.59	45.26	-28.74	74.00	Peak
3	8811.500	32.18	14.42	46.60	-21.60	68.20	Peak
4	* 9959.000	31.88	16.49	48.37	-19.83	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at channel 5825MHz	Test Voltage	By PoE

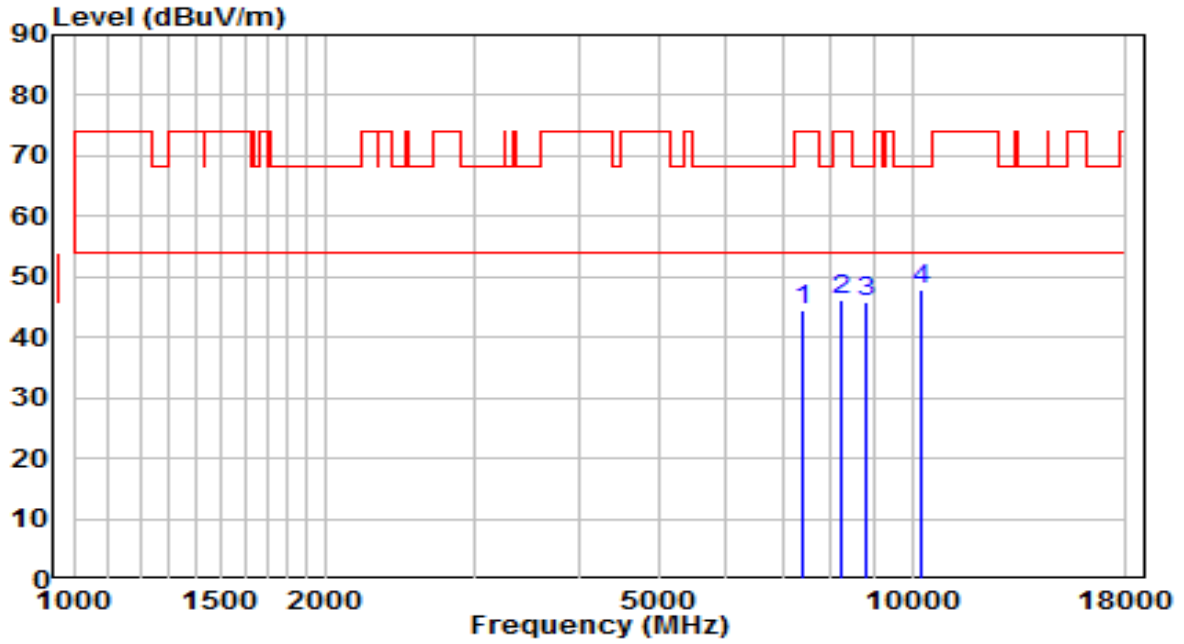


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7426.000	31.86	12.69	44.55	-29.45	74.00	Peak
2	8233.500	32.68	13.54	46.22	-27.78	74.00	Peak
3	8811.500	31.41	14.42	45.83	-22.37	68.20	Peak
4	* 10239.500	30.44	17.52	47.96	-20.24	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5190MHz	Test Voltage	By PoE

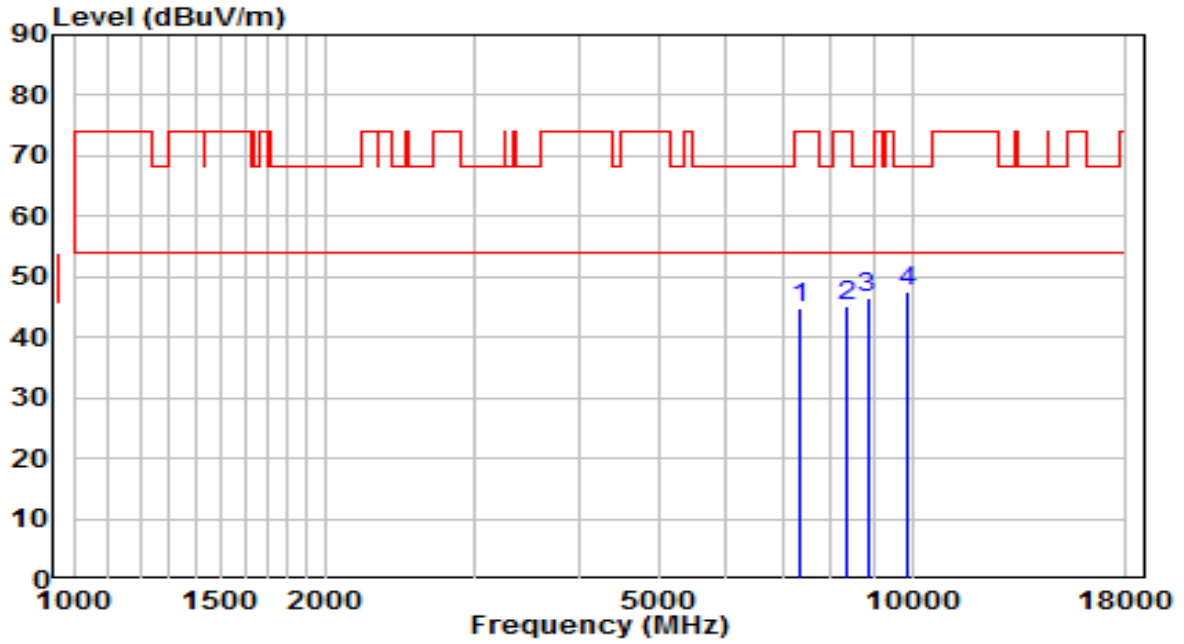


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7366.500	32.34	12.42	44.76	-29.24	74.00	Peak
2	8344.000	31.43	13.58	45.01	-28.99	74.00	Peak
3	8845.500	32.14	14.50	46.64	-21.56	68.20	Peak
4	* 9874.000	31.20	16.35	47.55	-20.65	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5190MHz	Test Voltage	By PoE

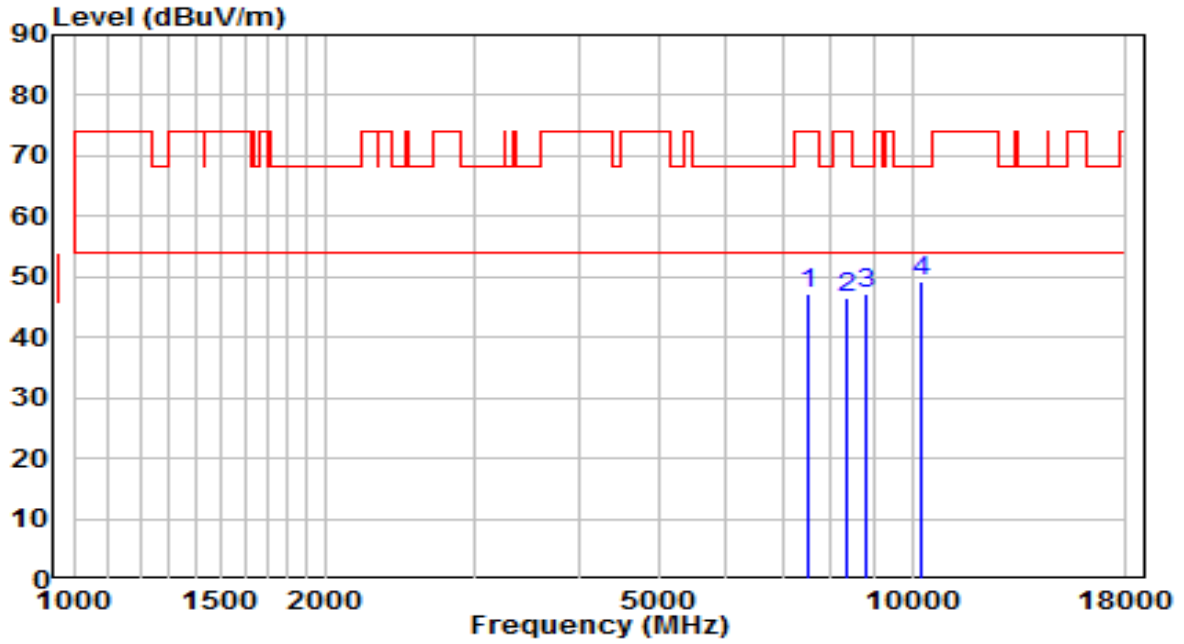


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7502.500	34.33	13.02	47.34	-26.66	74.00	Peak
2	8327.000	32.87	13.58	46.45	-27.55	74.00	Peak
3	8794.500	32.73	14.38	47.11	-21.09	68.20	Peak
4	* 10256.500	31.78	17.59	49.37	-18.83	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5230MHz	Test Voltage	By PoE

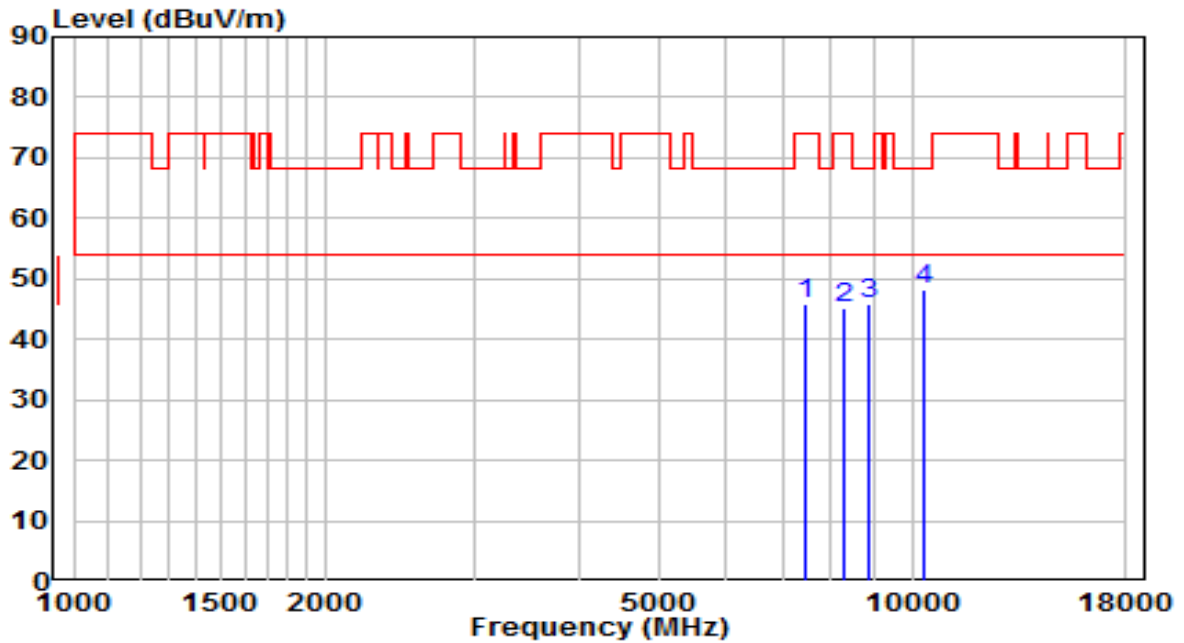


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7477.000	32.81	12.91	45.72	-28.28	74.00	Peak
2	8293.000	31.71	13.56	45.27	-28.73	74.00	Peak
3	8871.000	31.18	14.56	45.74	-22.46	68.20	Peak
4	* 10324.500	30.25	17.86	48.12	-20.08	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5230MHz	Test Voltage	By PoE

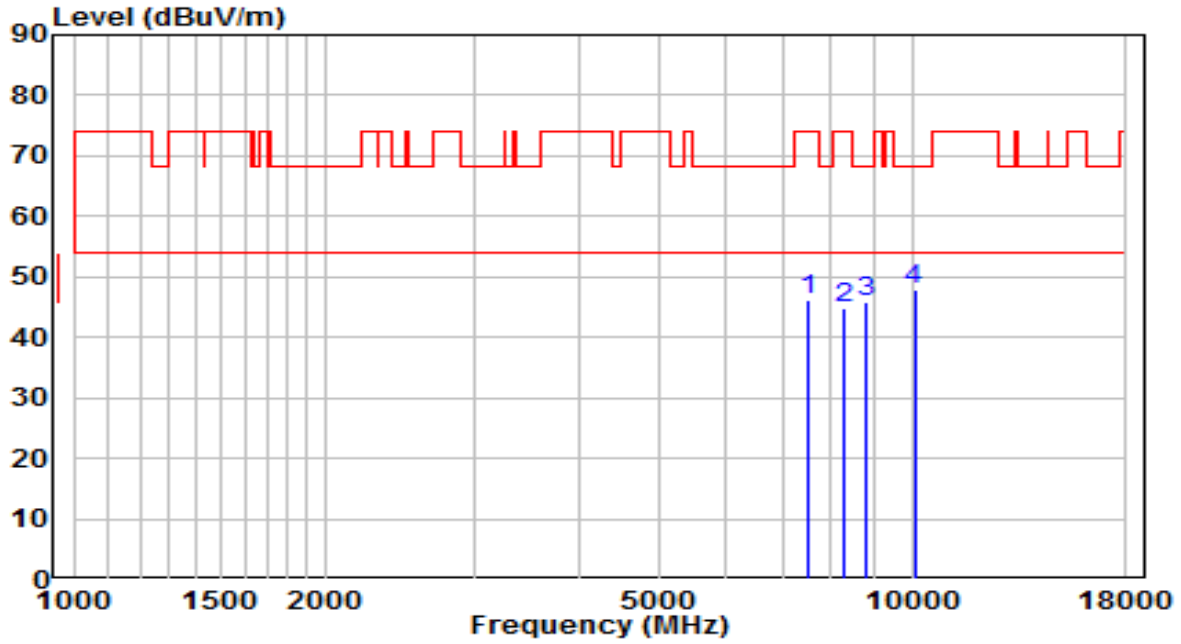


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7519.500	33.02	13.03	46.05	-27.95	74.00	Peak
2	8293.000	31.31	13.56	44.87	-29.13	74.00	Peak
3	8794.500	31.48	14.38	45.86	-22.34	68.20	Peak
4	* 10061.000	31.20	16.81	48.01	-20.19	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5270MHz	Test Voltage	By PoE

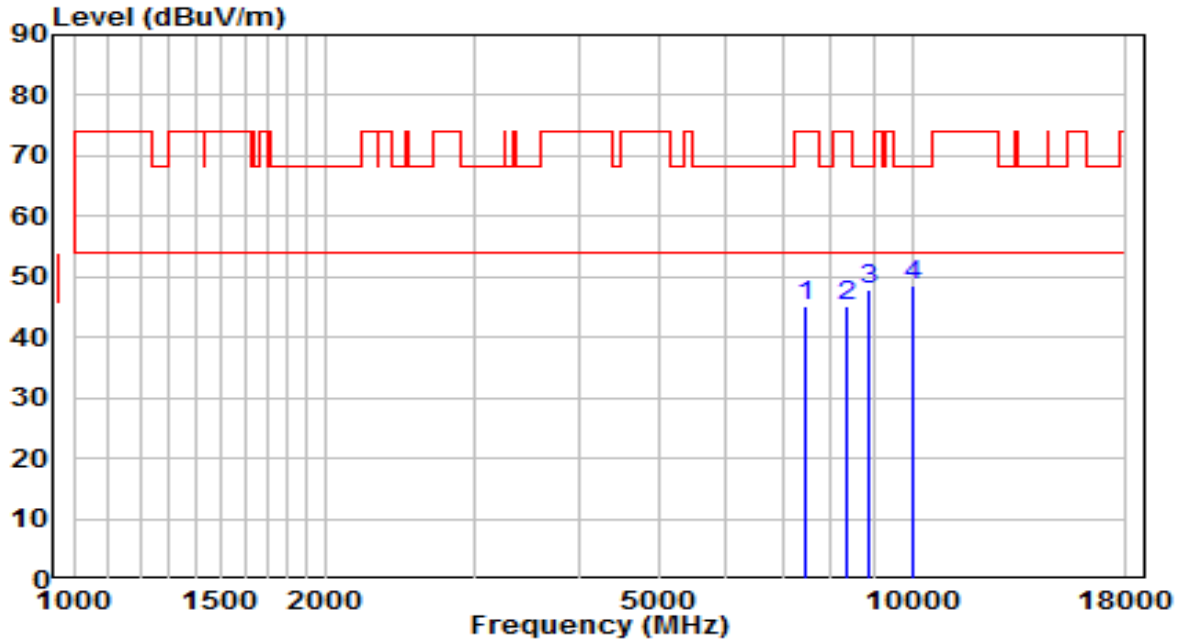


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7477.000	32.42	12.91	45.33	-28.67	74.00	Peak
2	8327.000	31.60	13.58	45.18	-28.82	74.00	Peak
3	8871.000	33.19	14.56	47.75	-20.45	68.20	Peak
4	* 10018.500	31.84	16.63	48.48	-19.72	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5270MHz	Test Voltage	By PoE

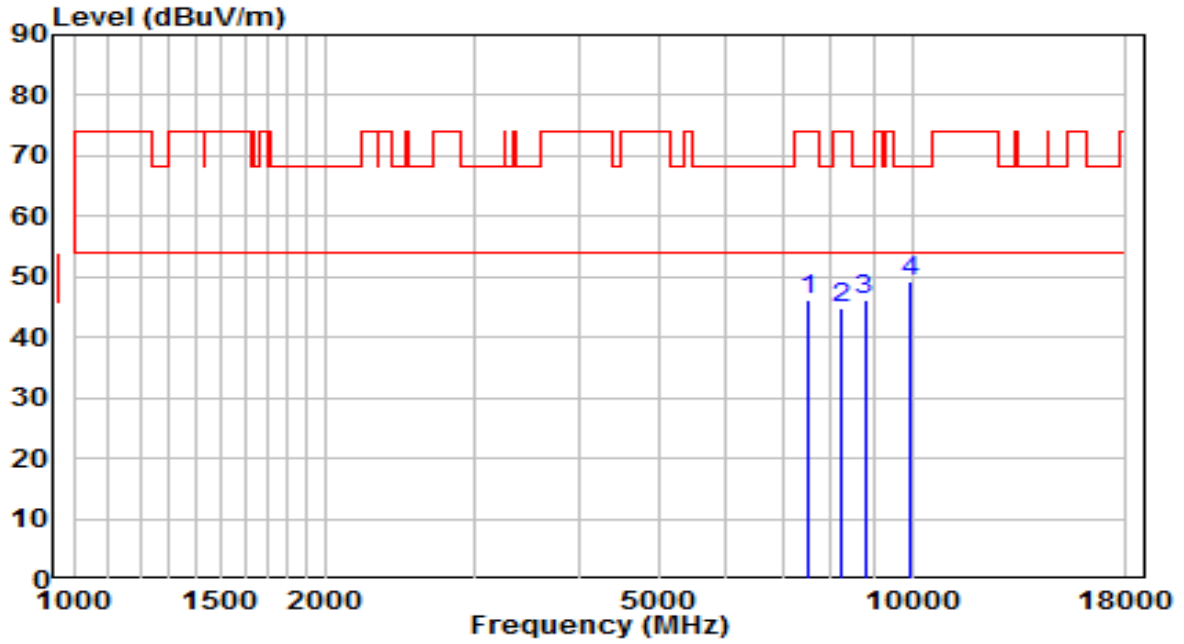


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7519.500	33.23	13.03	46.26	-27.74	74.00	Peak
2	8250.500	31.18	13.54	44.72	-29.28	74.00	Peak
3	8777.500	31.97	14.33	46.30	-21.90	68.20	Peak
4	* 9916.500	32.81	16.42	49.23	-18.97	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5310MHz	Test Voltage	By PoE

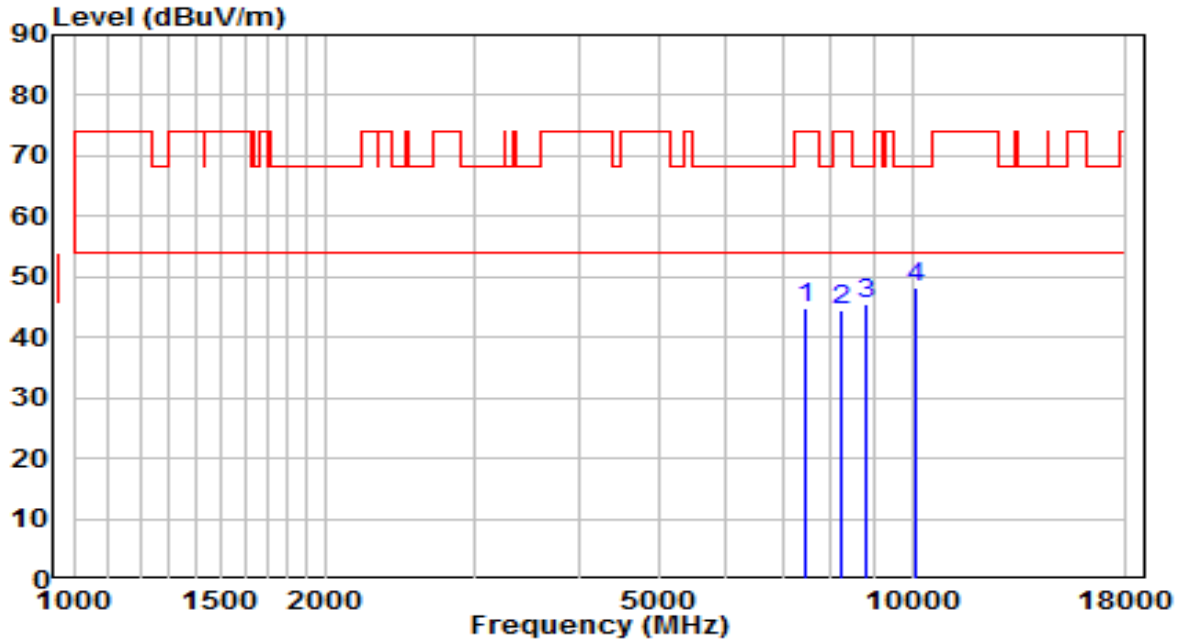


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7460.000	32.08	12.84	44.91	-29.09	74.00	Peak
2	8233.500	30.95	13.54	44.49	-29.51	74.00	Peak
3	8811.500	31.22	14.42	45.64	-22.56	68.20	Peak
4	* 10129.000	31.24	17.08	48.32	-19.88	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5310MHz	Test Voltage	By PoE

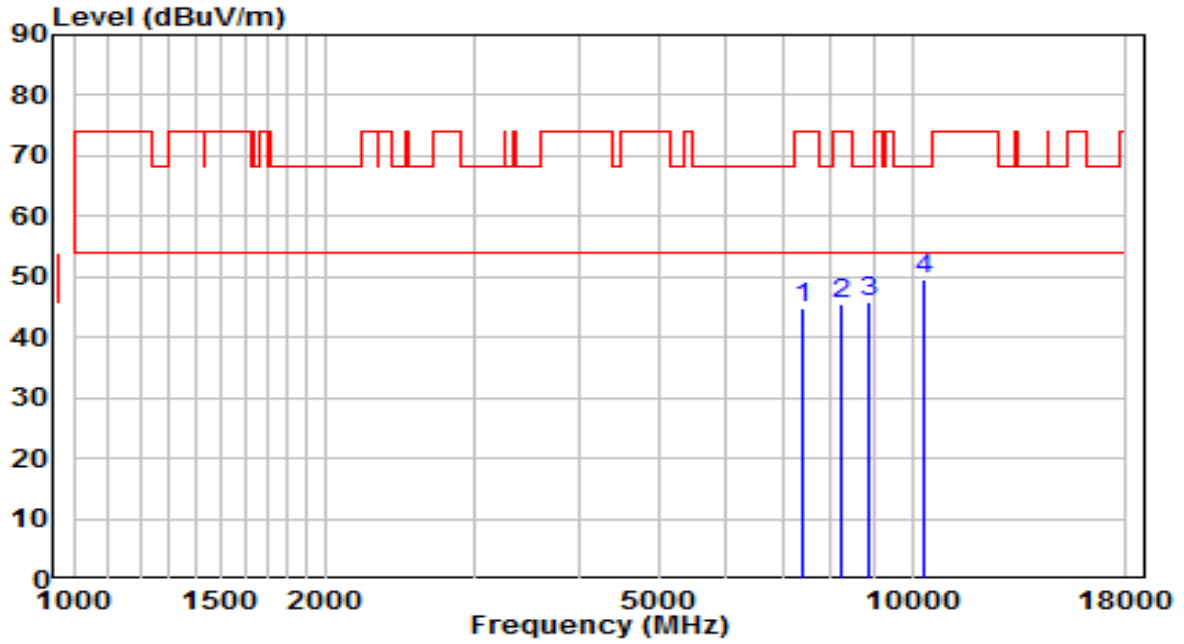


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7409.000	32.35	12.61	44.96	-29.04	74.00	Peak
2	8250.500	31.82	13.54	45.36	-28.64	74.00	Peak
3	8871.000	31.42	14.56	45.99	-22.21	68.20	Peak
4	* 10299.000	31.96	17.76	49.72	-18.48	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5510MHz	Test Voltage	By PoE

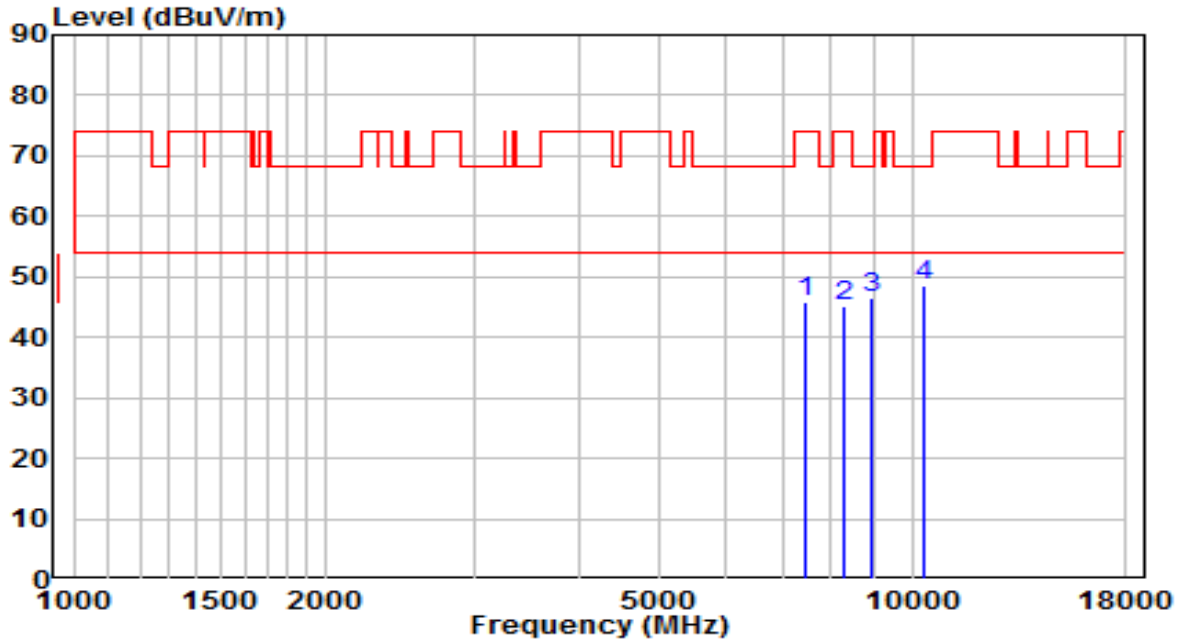


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7477.000	33.07	12.91	45.99	-28.01	74.00	Peak
2	8267.500	31.50	13.55	45.05	-28.95	74.00	Peak
3	8922.000	31.94	14.69	46.63	-21.57	68.20	Peak
4	* 10299.000	30.76	17.76	48.53	-19.67	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5510MHz	Test Voltage	By PoE

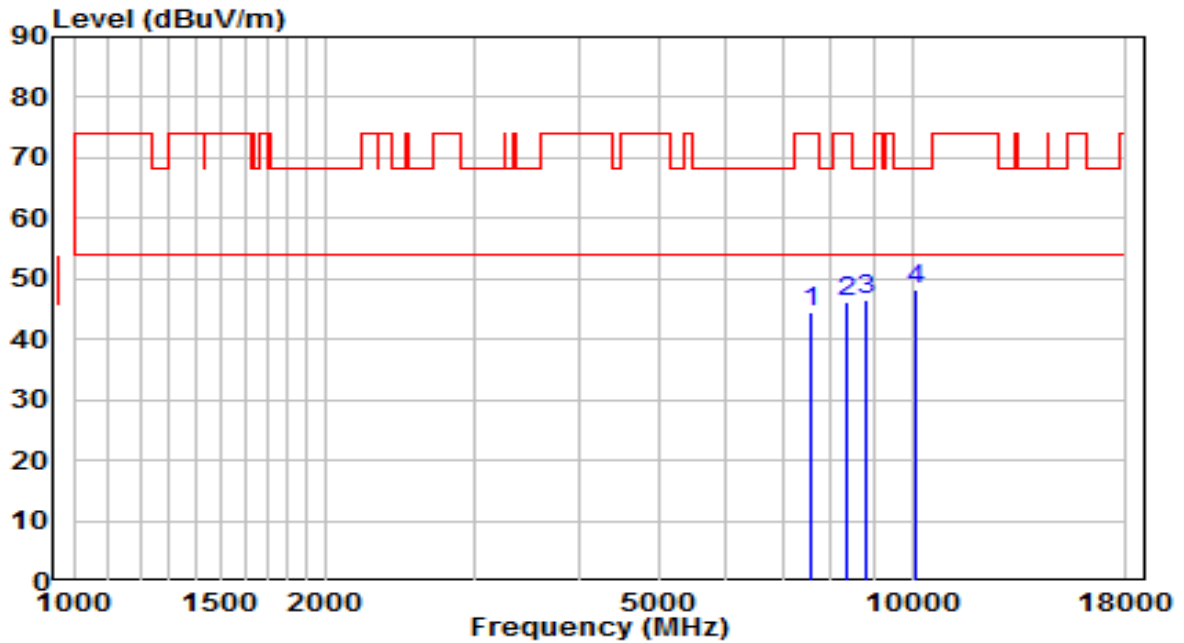


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7570.500	31.52	13.07	44.60	-29.40	74.00	Peak
2	8361.000	32.63	13.59	46.22	-27.78	74.00	Peak
3	8794.500	32.16	14.38	46.53	-21.67	68.20	Peak
4	* 10103.500	31.11	16.98	48.09	-20.11	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5550MHz	Test Voltage	By PoE

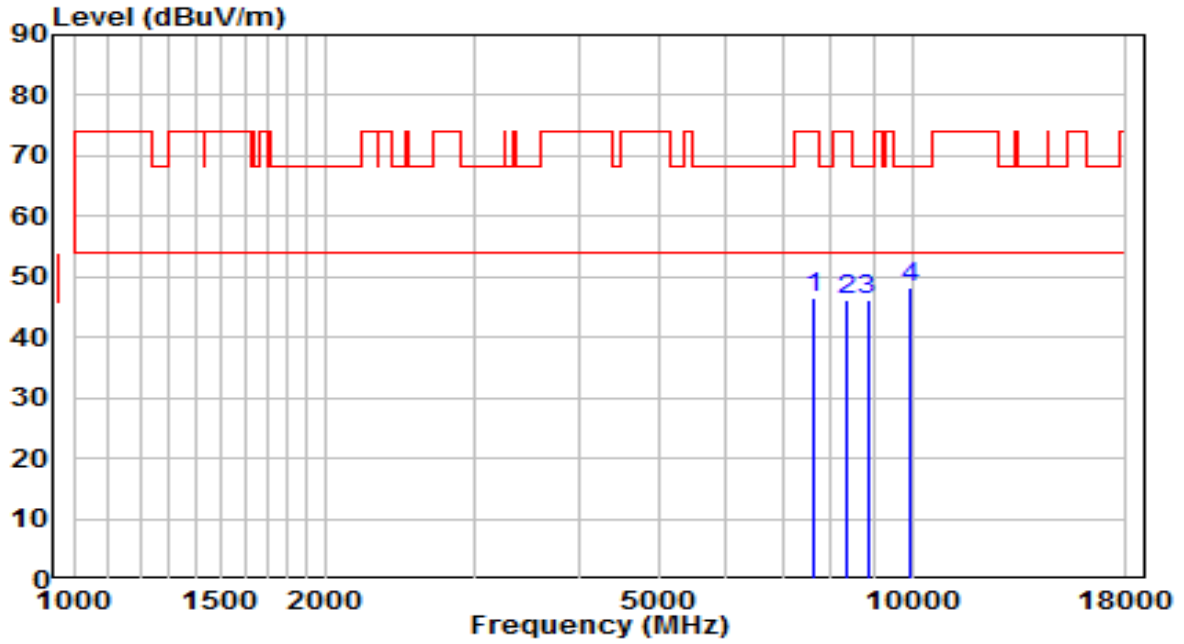


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7604.500	33.29	13.10	46.39	-27.61	74.00	Peak
2	8361.000	32.63	13.59	46.22	-27.78	74.00	Peak
3	8845.500	31.81	14.50	46.31	-21.89	68.20	Peak
4	* 9942.000	31.93	16.46	48.39	-19.81	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5550MHz	Test Voltage	By PoE

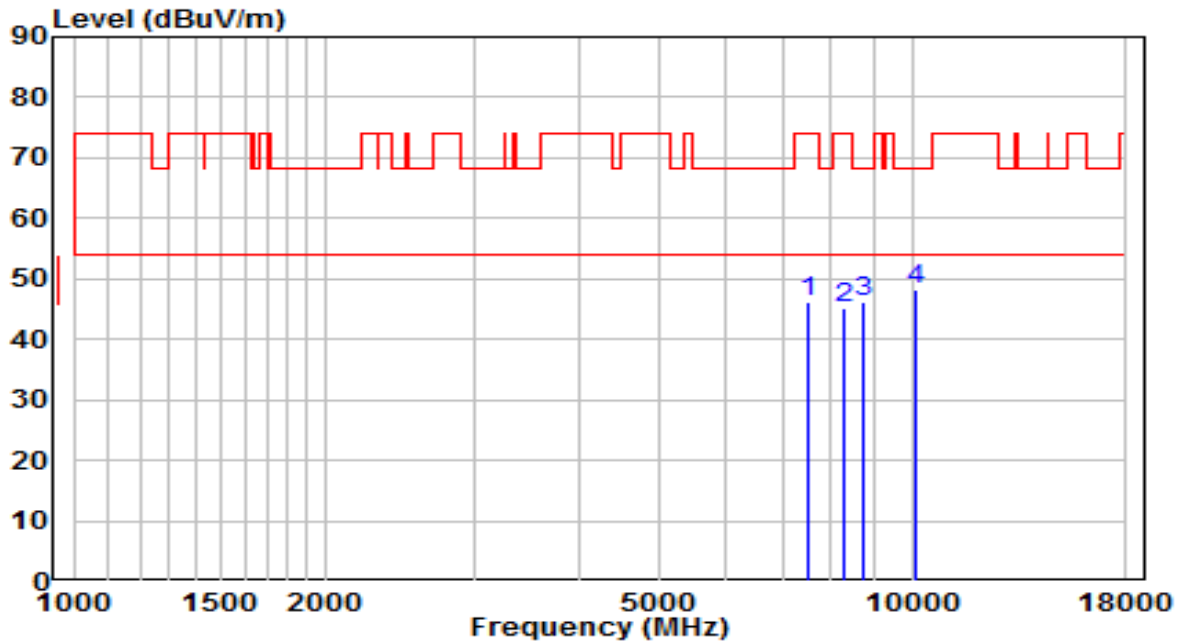


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7519.500	33.05	13.03	46.08	-27.92	74.00	Peak
2	8293.000	31.57	13.56	45.13	-28.87	74.00	Peak
3	8760.500	32.01	14.29	46.31	-21.89	68.20	Peak
4	* 10129.000	31.25	17.08	48.33	-19.87	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5670MHz	Test Voltage	By PoE

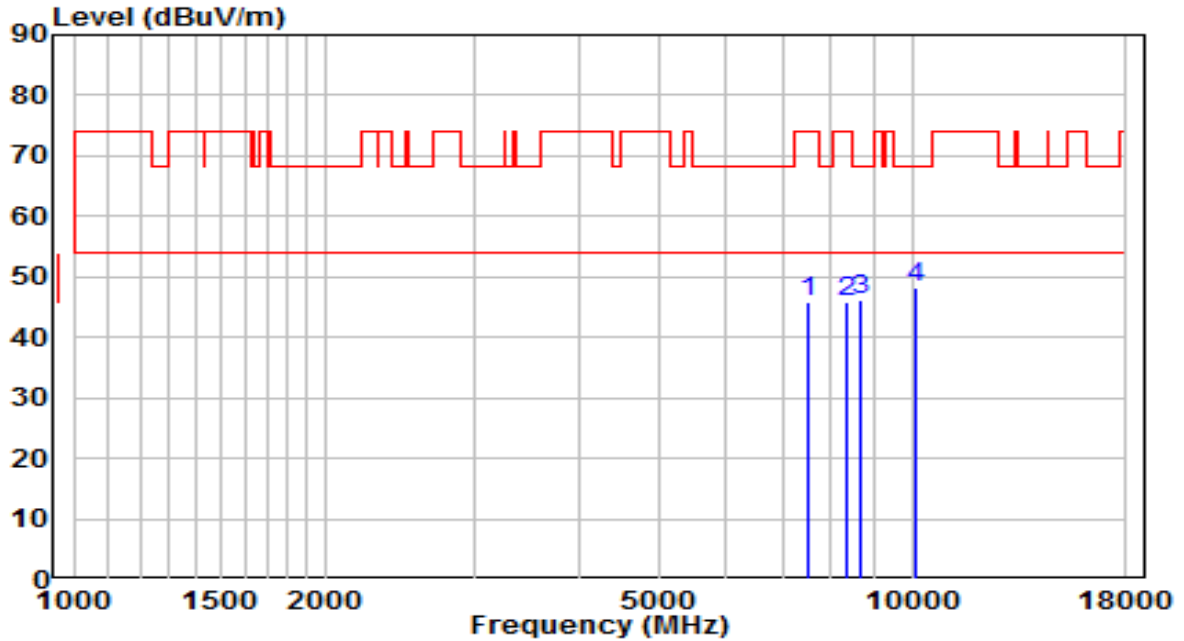


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7494.000	32.89	12.99	45.88	-28.12	74.00	Peak
2	8361.000	32.26	13.59	45.85	-28.15	74.00	Peak
3	8667.000	32.25	14.06	46.32	-21.88	68.20	Peak
4	* 10086.500	31.30	16.91	48.21	-19.99	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5670MHz	Test Voltage	By PoE

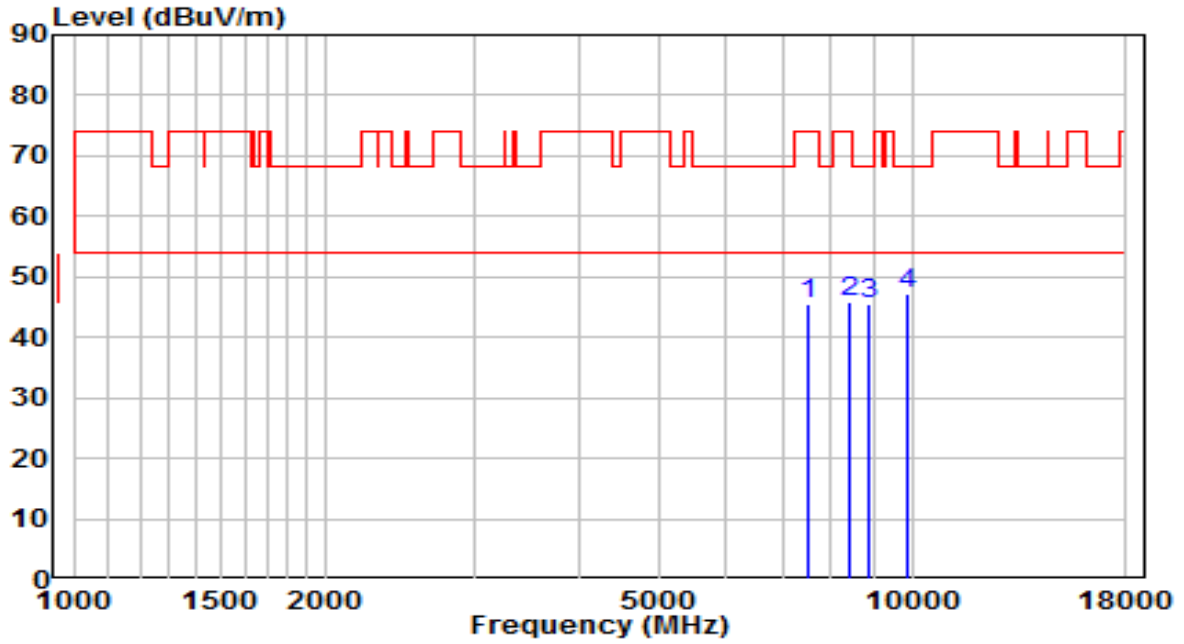


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7494.000	32.58	12.99	45.57	-28.43	74.00	Peak
2	8395.000	32.10	13.61	45.71	-28.29	74.00	Peak
3	8871.000	31.08	14.56	45.64	-22.56	68.20	Peak
4	* 9874.000	31.02	16.35	47.36	-20.84	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5710MHz	Test Voltage	By PoE

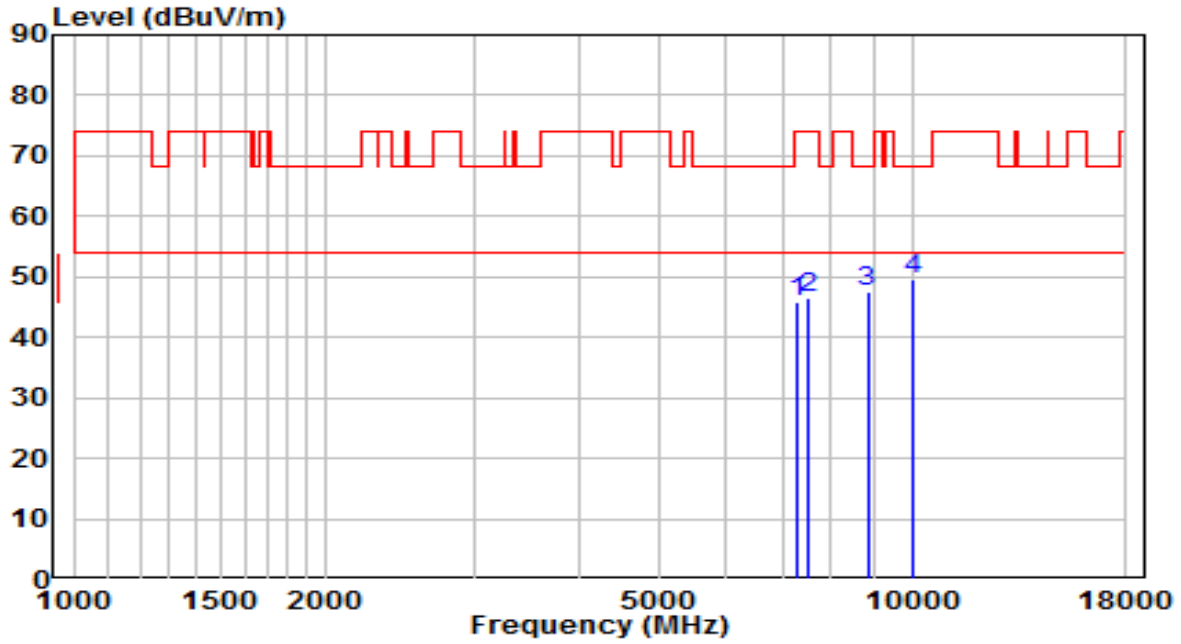


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7281.500	33.84	12.05	45.89	-28.11	74.00	Peak
2	7519.500	33.66	13.03	46.69	-27.31	74.00	Peak
3	8845.500	32.93	14.50	47.43	-20.77	68.20	Peak
4	* 10010.000	32.88	16.60	49.48	-18.72	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5710MHz	Test Voltage	By PoE

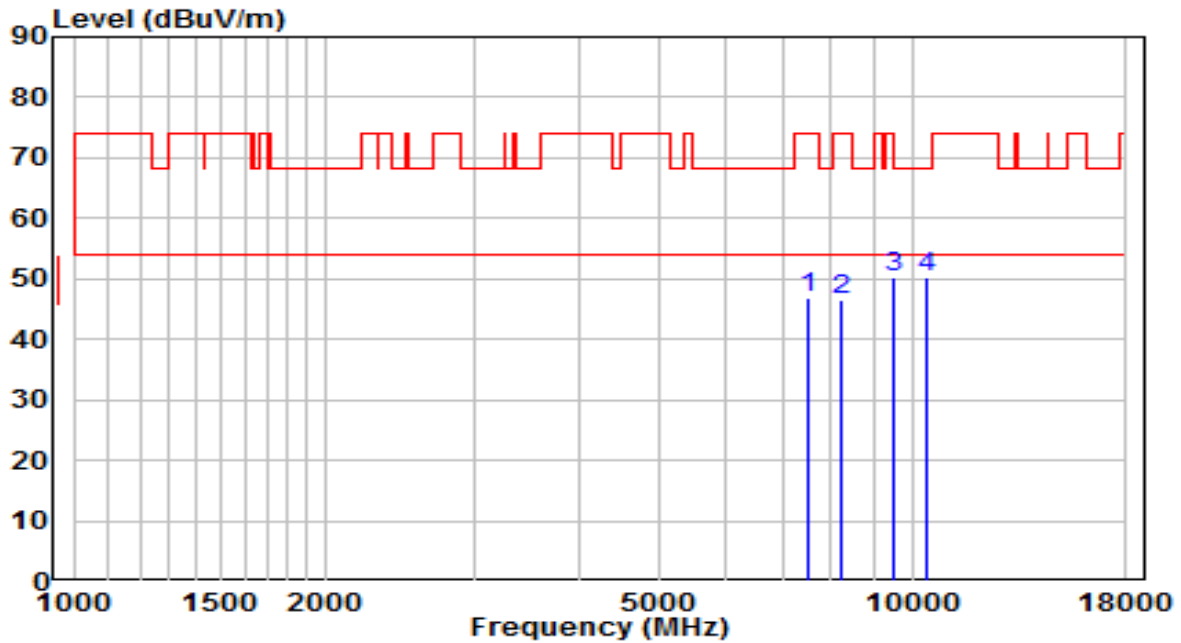


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7511.000	33.91	13.02	46.93	-27.07	74.00	Peak
2	8250.500	32.91	13.54	46.46	-27.54	74.00	Peak
3	* 9508.500	34.58	15.73	50.32	-17.88	68.20	Peak
4	10409.500	31.98	18.21	50.19	-18.01	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5755MHz	Test Voltage	By PoE

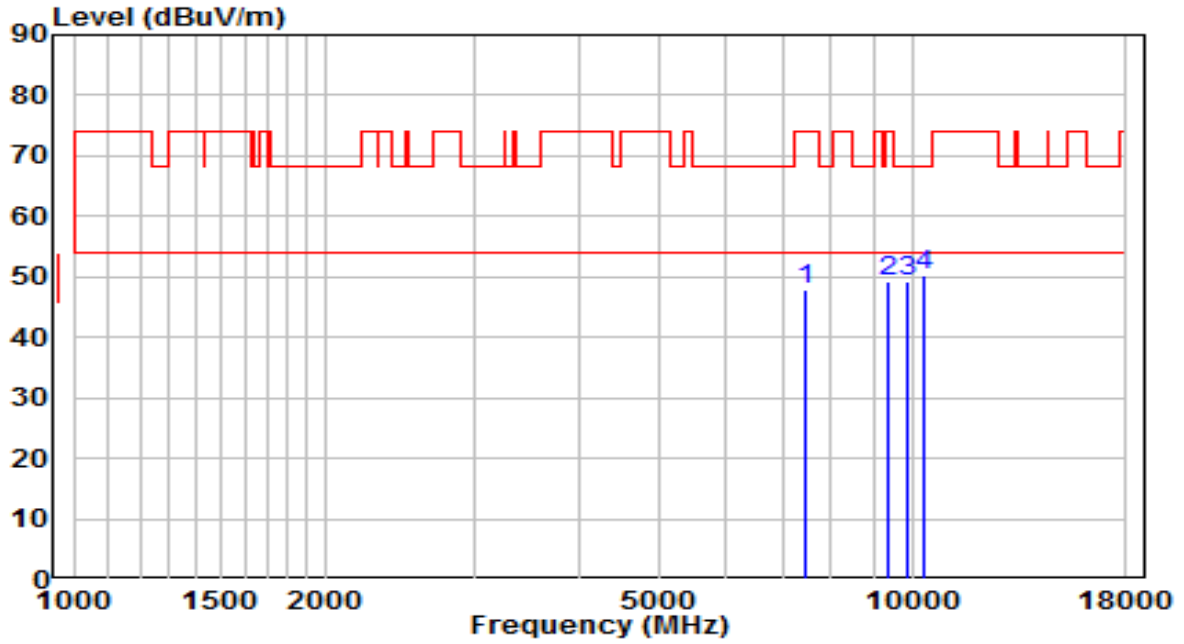


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7434.500	35.24	12.72	47.97	-26.03	74.00	Peak
2	9338.500	33.90	15.45	49.35	-24.65	74.00	Peak
3	9865.500	32.85	16.33	49.19	-19.01	68.20	Peak
4	* 10299.000	32.58	17.76	50.34	-17.86	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5755MHz	Test Voltage	By PoE

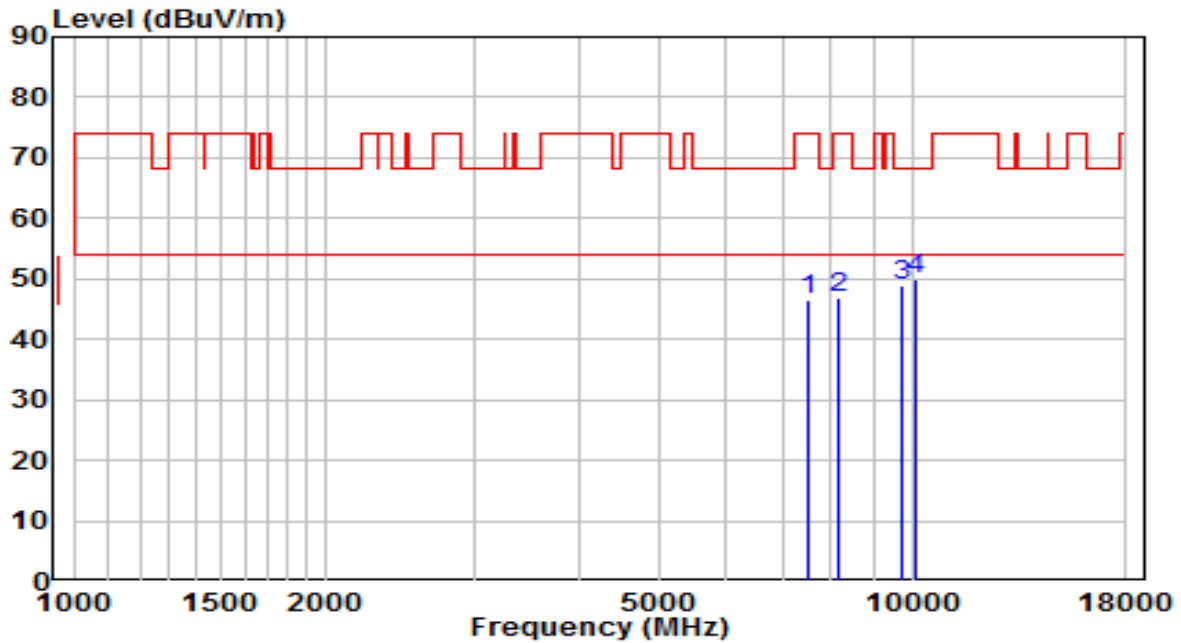


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7511.000	33.39	13.02	46.41	-27.59	74.00	Peak
2	8191.000	33.52	13.52	47.03	-26.97	74.00	Peak
3	9712.500	32.78	16.08	48.86	-19.34	68.20	Peak
4	* 10120.500	32.78	17.04	49.82	-18.38	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5795MHz	Test Voltage	By PoE

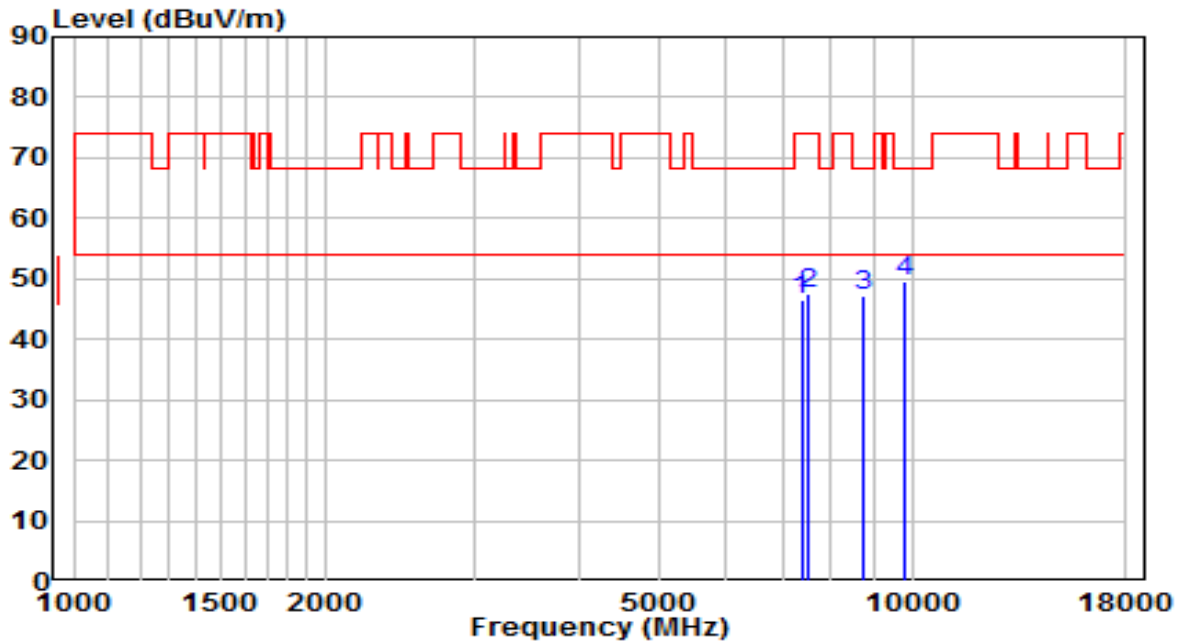


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7375.000	34.11	12.46	46.57	-27.43	74.00	Peak
2	7536.500	34.37	13.05	47.42	-26.58	74.00	Peak
3	8769.000	33.01	14.31	47.33	-20.87	68.20	Peak
4	* 9823.000	33.38	16.26	49.64	-18.56	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at channel 5795MHz	Test Voltage	By PoE

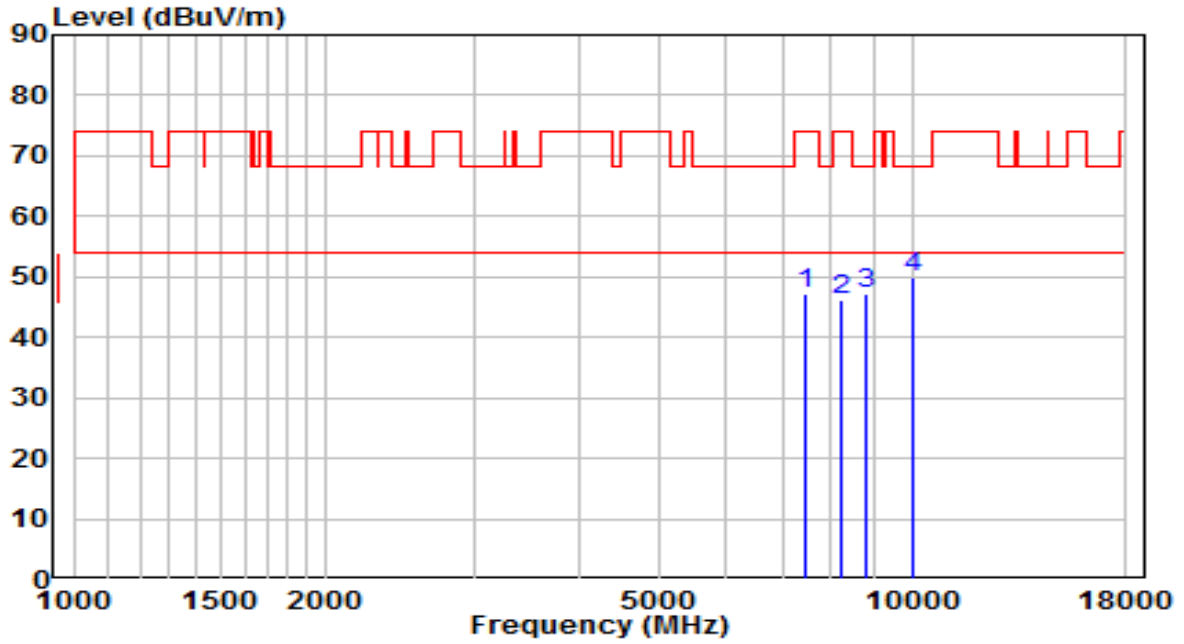


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7468.500	34.19	12.88	47.07	-26.93	74.00	Peak
2	8208.000	32.78	13.52	46.30	-27.70	74.00	Peak
3	8828.500	32.70	14.46	47.16	-21.04	68.20	Peak
4	* 10001.500	33.35	16.57	49.92	-18.28	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at channel 5210MHz	Test Voltage	By PoE

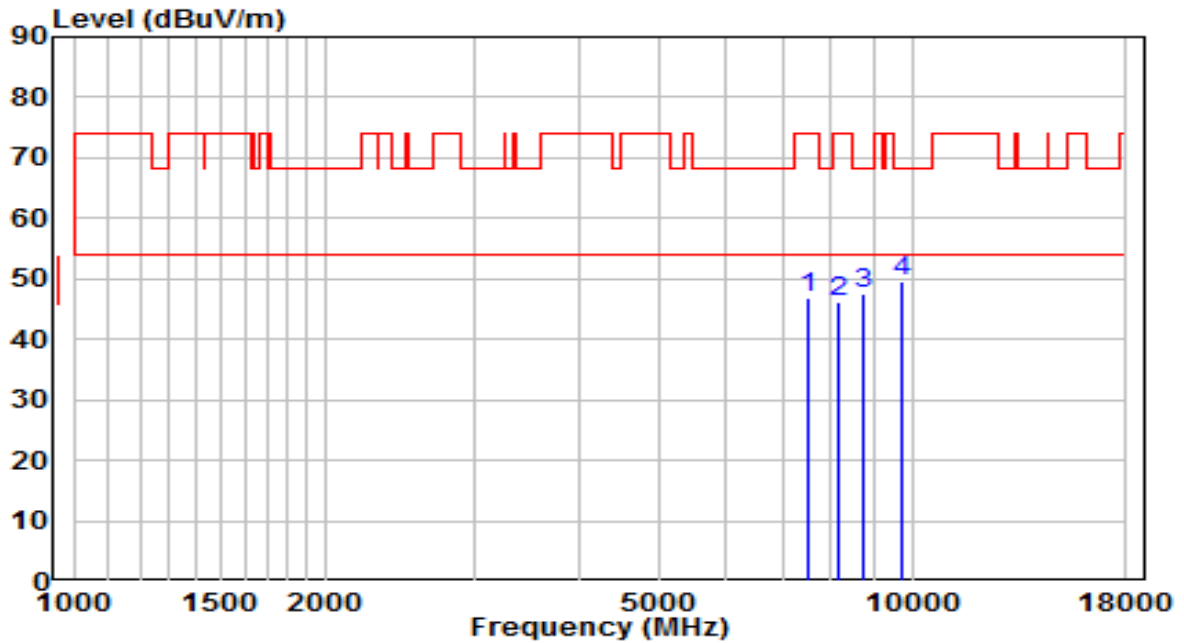


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7519.500	33.69	13.03	46.72	-27.28	74.00	Peak
2	8191.000	32.56	13.52	46.08	-27.92	74.00	Peak
3	8743.500	33.43	14.25	47.68	-20.52	68.20	Peak
4	* 9738.000	33.37	16.12	49.49	-18.71	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at channel 5210MHz	Test Voltage	By PoE

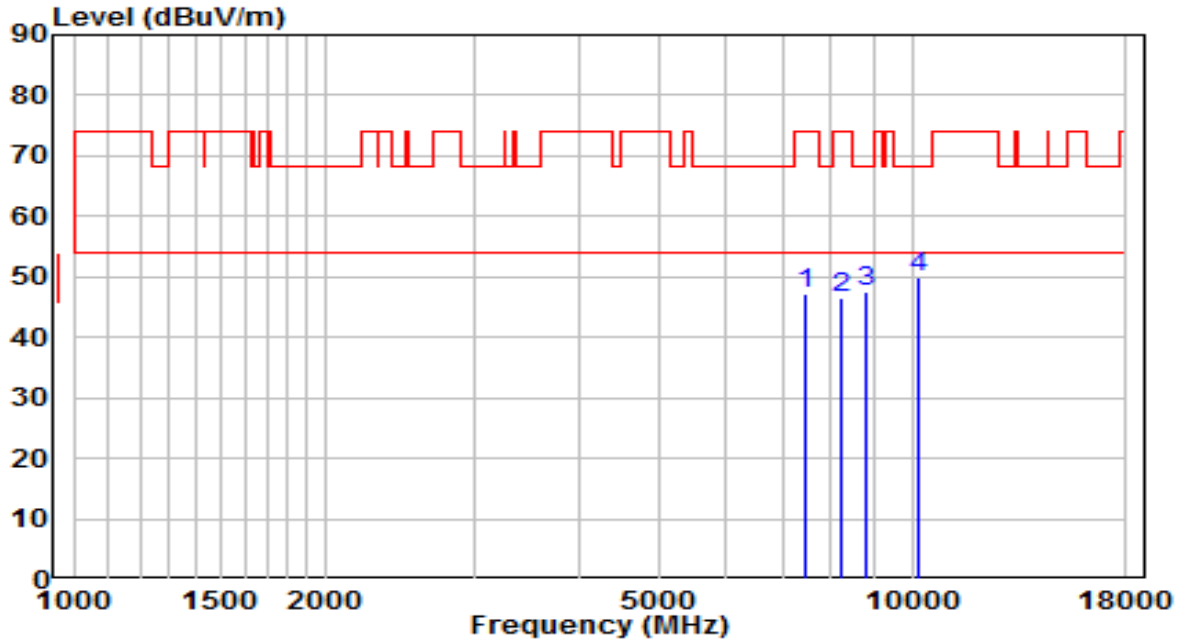


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7434.500	34.33	12.72	47.06	-26.94	74.00	Peak
2	8233.500	32.91	13.54	46.45	-27.55	74.00	Peak
3	8786.000	33.28	14.36	47.64	-20.56	68.20	Peak
4	* 10163.000	32.56	17.22	49.77	-18.43	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at channel 5290MHz	Test Voltage	By PoE

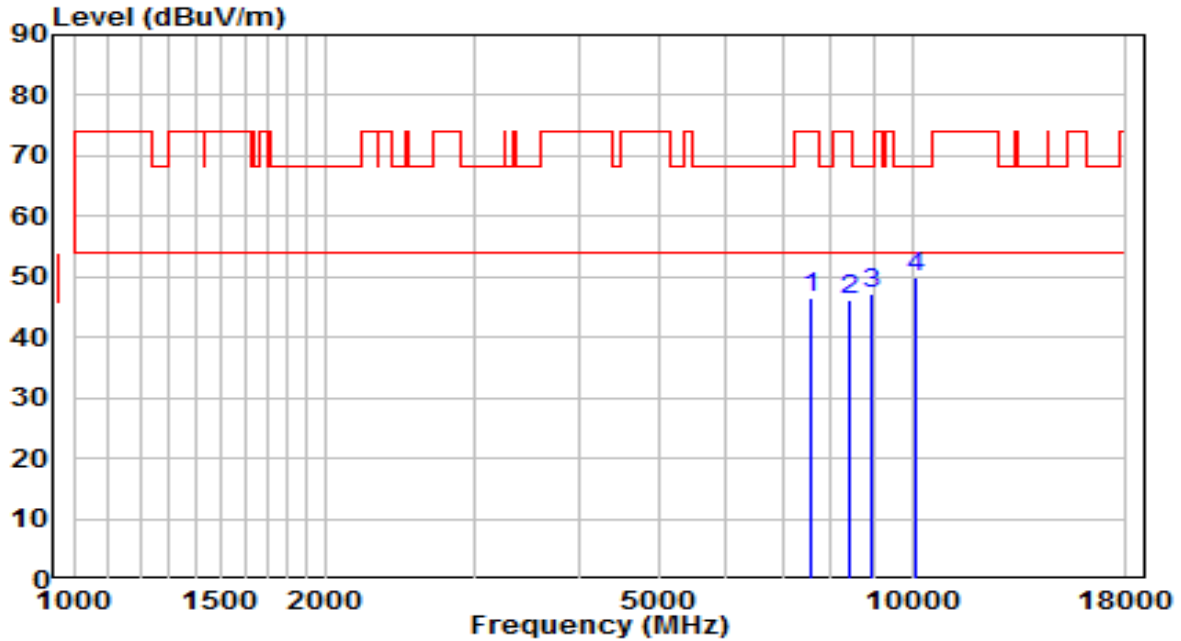


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7587.500	33.60	13.09	46.69	-27.31	74.00	Peak
2	8395.000	32.62	13.61	46.23	-27.77	74.00	Peak
3	8922.000	32.42	14.69	47.11	-21.09	68.20	Peak
4	* 10120.500	32.76	17.04	49.80	-18.40	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at channel 5290MHz	Test Voltage	By PoE

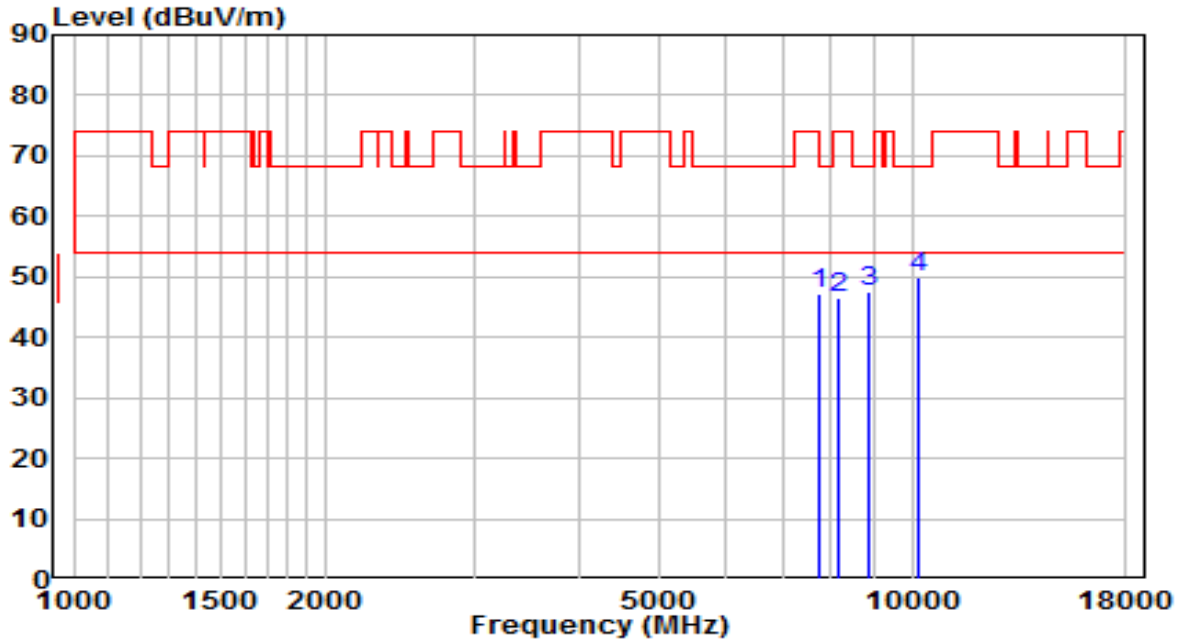


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7740.500	34.02	13.21	47.24	-26.76	74.00	Peak
2	8157.000	32.90	13.50	46.40	-27.60	74.00	Peak
3	8879.500	32.97	14.58	47.56	-20.64	68.20	Peak
4	* 10146.000	32.79	17.15	49.94	-18.26	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at channel 5530MHz	Test Voltage	By PoE

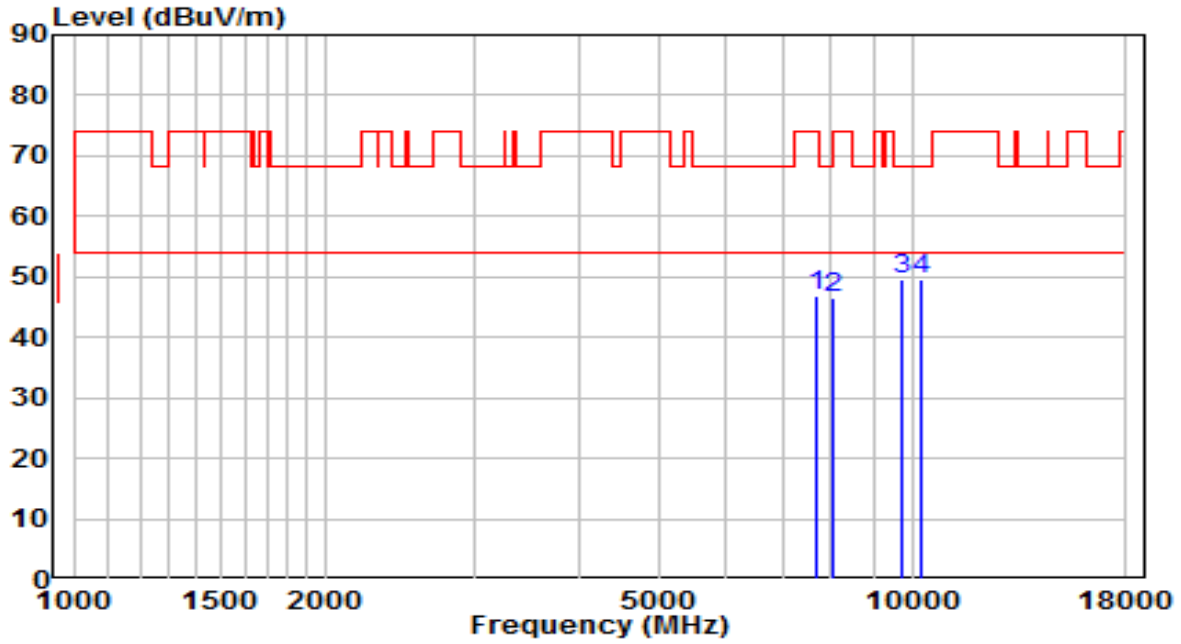


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7706.500	33.57	13.19	46.75	-27.25	74.00	Peak
2	8046.500	33.08	13.45	46.53	-27.47	74.00	Peak
3	9755.000	33.29	16.15	49.43	-18.77	68.20	Peak
4	* 10248.000	32.16	17.56	49.71	-18.49	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at channel 5530MHz	Test Voltage	By PoE

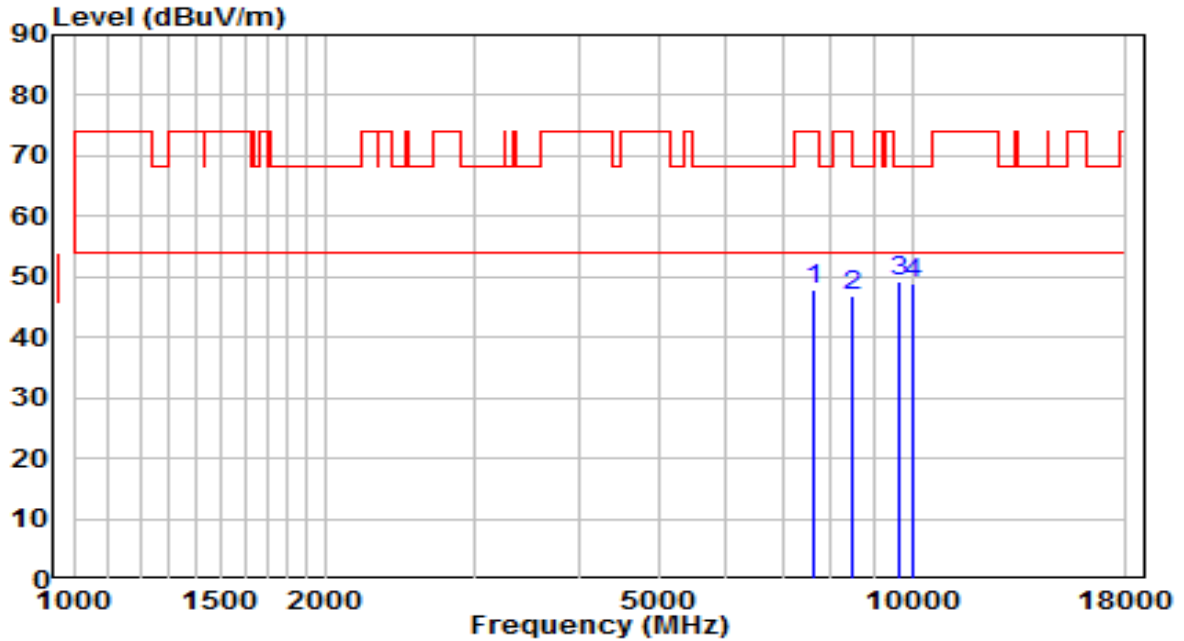


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7638.500	34.60	13.13	47.73	-26.27	74.00	Peak
2	8488.500	33.19	13.65	46.84	-27.16	74.00	Peak
3	* 9636.000	33.31	15.95	49.26	-18.94	68.20	Peak
4	10052.500	32.23	16.77	49.00	-19.20	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at channel 5610MHz	Test Voltage	By PoE

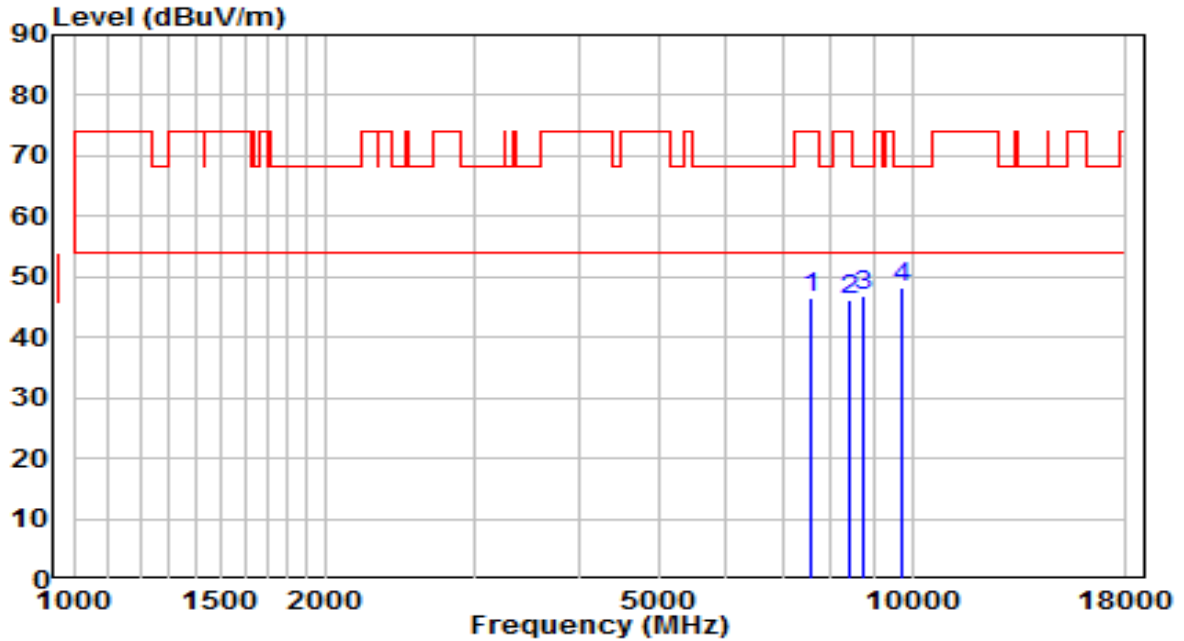


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7570.500	33.55	13.07	46.62	-27.38	74.00	Peak
2	8420.500	32.67	13.62	46.29	-27.71	74.00	Peak
3	8752.000	32.74	14.27	47.01	-21.19	68.20	Peak
4	* 9695.500	32.07	16.05	48.12	-20.08	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at channel 5610MHz	Test Voltage	By PoE

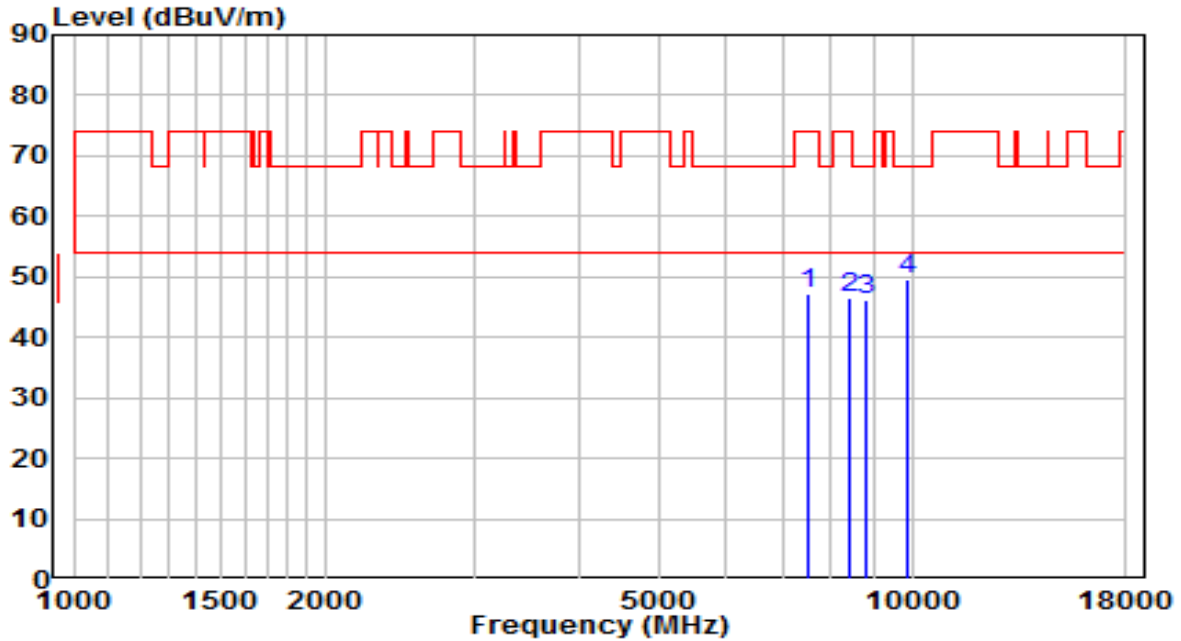


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7494.000	34.10	12.99	47.09	-26.91	74.00	Peak
2	8412.000	32.91	13.62	46.53	-27.47	74.00	Peak
3	8828.500	31.76	14.46	46.22	-21.98	68.20	Peak
4	* 9899.500	33.24	16.39	49.63	-18.57	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at channel 5690MHz	Test Voltage	By PoE

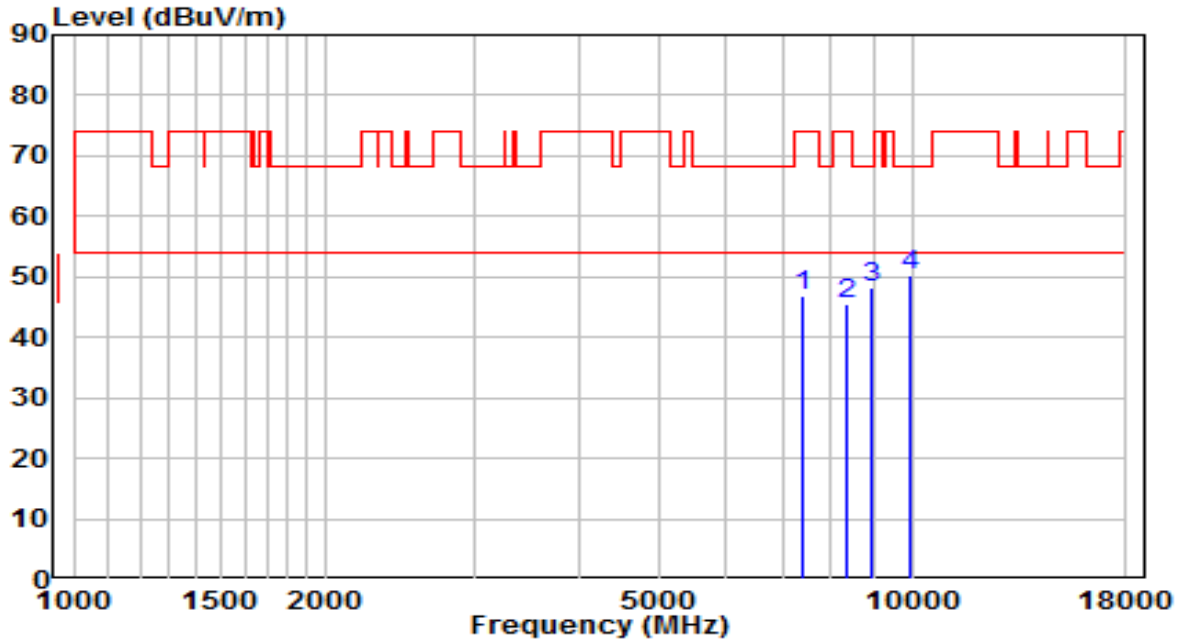


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7417.500	34.38	12.65	47.03	-26.97	74.00	Peak
2	8327.000	32.02	13.58	45.60	-28.40	74.00	Peak
3	8964.500	33.29	14.79	48.08	-20.12	68.20	Peak
4	* 9925.000	33.69	16.43	50.12	-18.08	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at channel 5690MHz	Test Voltage	By PoE

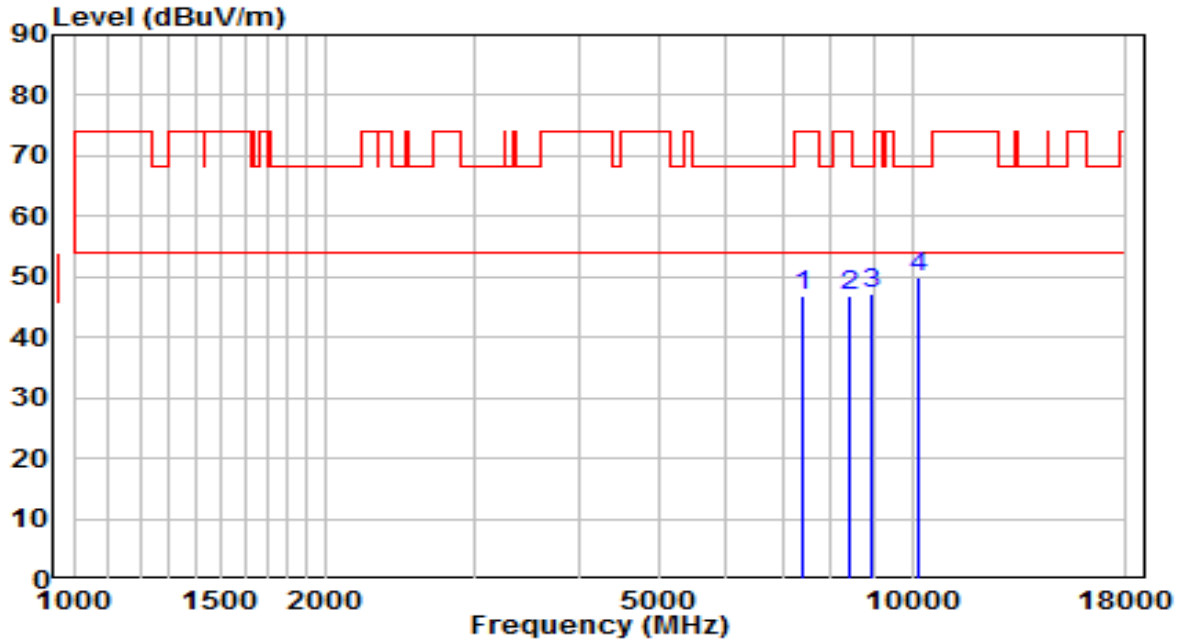


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7400.500	34.24	12.57	46.82	-27.18	74.00	Peak
2	8412.000	33.34	13.62	46.95	-27.05	74.00	Peak
3	8930.500	32.45	14.71	47.16	-21.04	68.20	Peak
4	* 10180.000	32.61	17.28	49.89	-18.31	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at channel 5775MHz	Test Voltage	By PoE

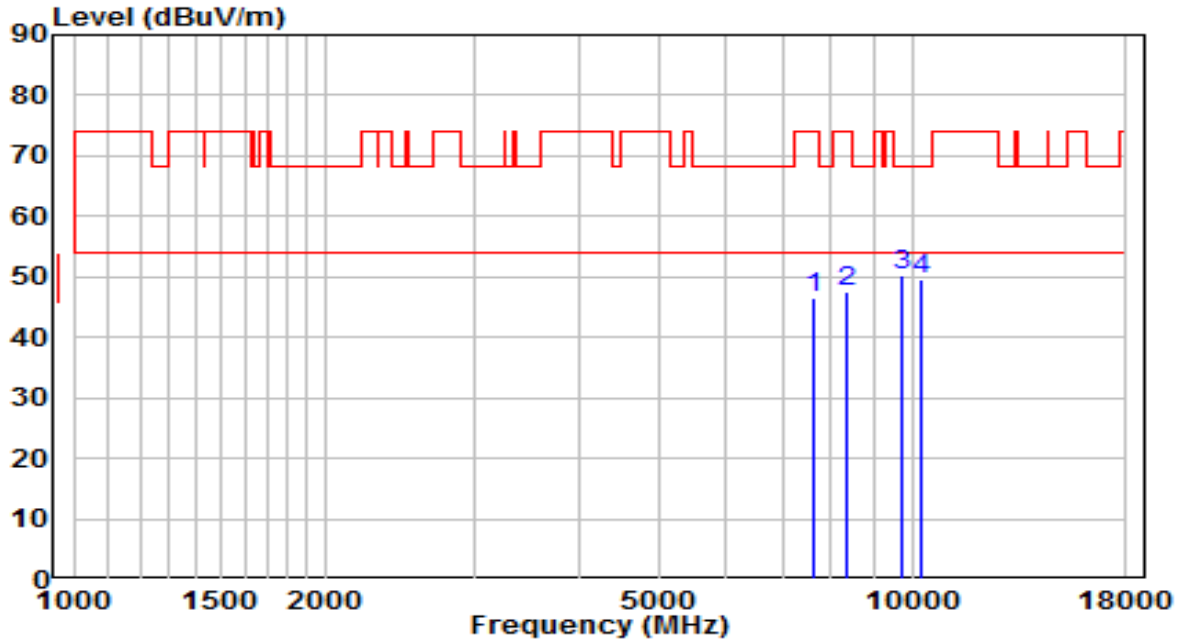


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7647.000	33.52	13.14	46.66	-27.34	74.00	Peak
2	8327.000	33.83	13.58	47.41	-26.59	74.00	Peak
3	* 9738.000	34.10	16.12	50.22	-17.98	68.20	Peak
4	10248.000	32.10	17.56	49.66	-18.54	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at channel 5775MHz	Test Voltage	By PoE

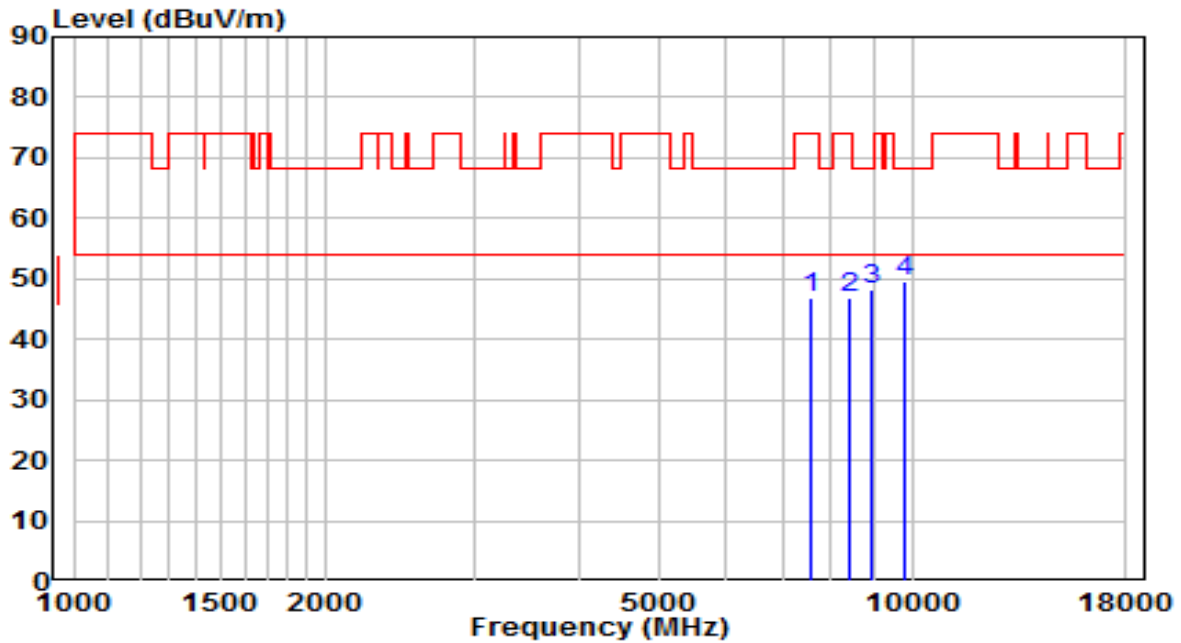


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7570.500	33.94	13.07	47.02	-26.98	74.00	Peak
2	8420.500	33.27	13.62	46.89	-27.11	74.00	Peak
3	8947.500	33.57	14.75	48.32	-19.88	68.20	Peak
4	* 9763.500	33.43	16.16	49.60	-18.60	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80+80 at channel 5210+5290MHz	Test Voltage	By PoE

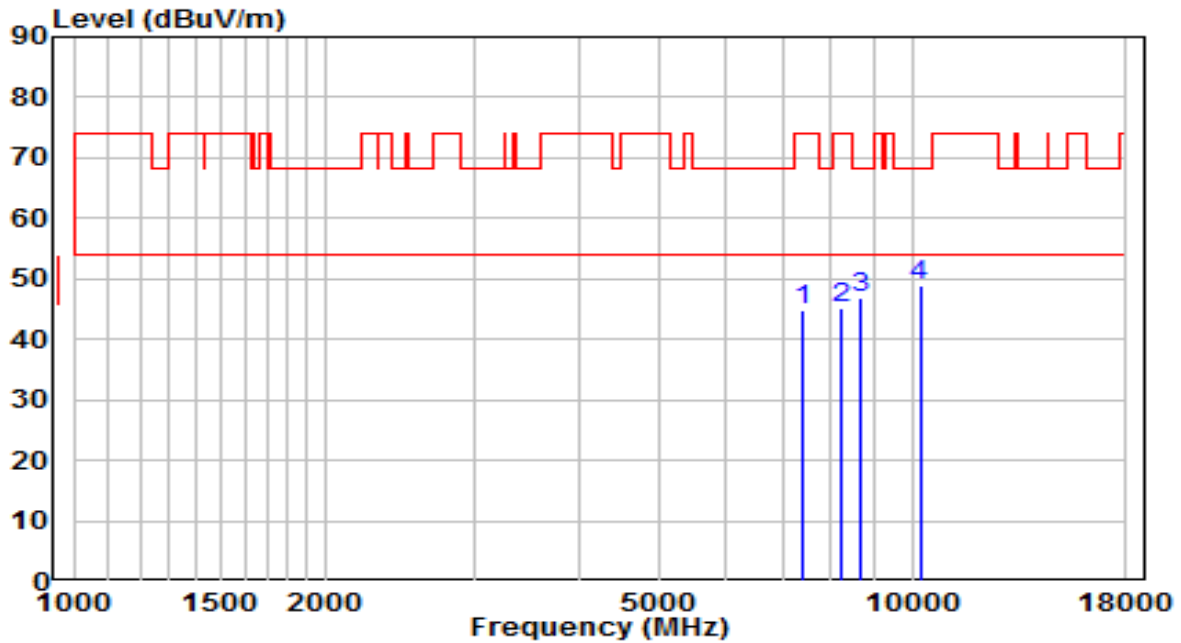


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7392.000	32.17	12.54	44.71	-29.29	74.00	Peak
2	8259.000	31.74	13.55	45.29	-28.71	74.00	Peak
3	8667.000	32.85	14.06	46.91	-21.29	68.20	Peak
4	* 10214.000	31.32	17.42	48.74	-19.46	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80+80 at channel 5210+5290MHz	Test Voltage	By PoE

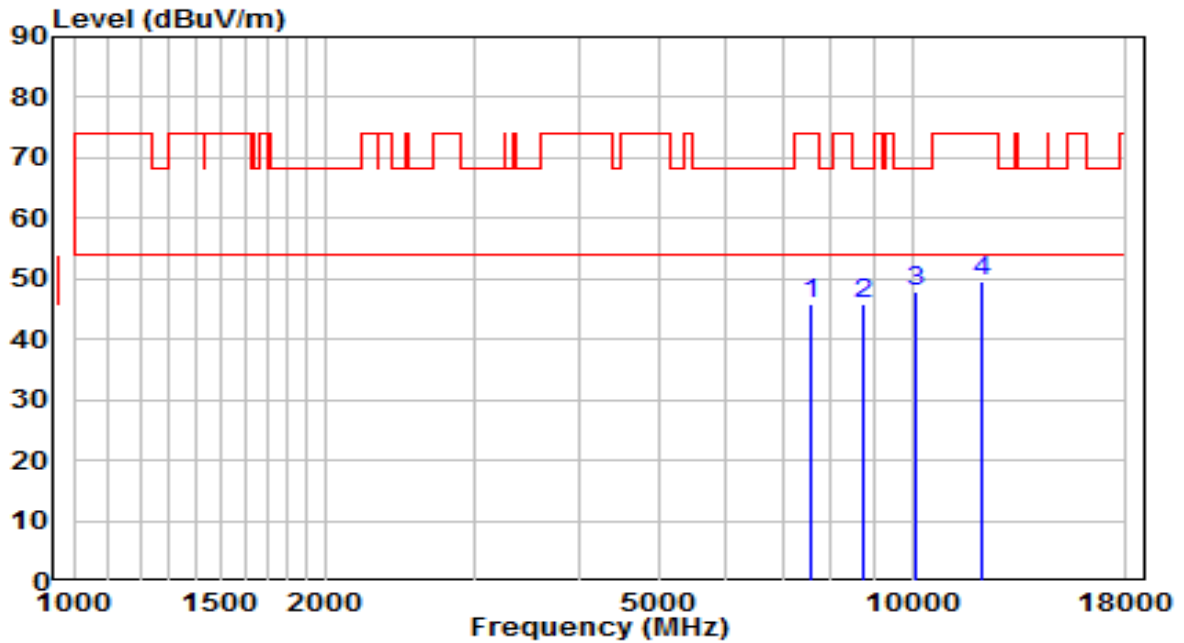


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7570.500	32.75	13.07	45.83	-28.17	74.00	Peak
2	8743.500	31.46	14.25	45.71	-22.49	68.20	Peak
3	* 10103.500	30.99	16.98	47.97	-20.23	68.20	Peak
4	12084.000	30.62	18.83	49.46	-24.54	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80+80 at channel 5530+5610MHz	Test Voltage	By PoE

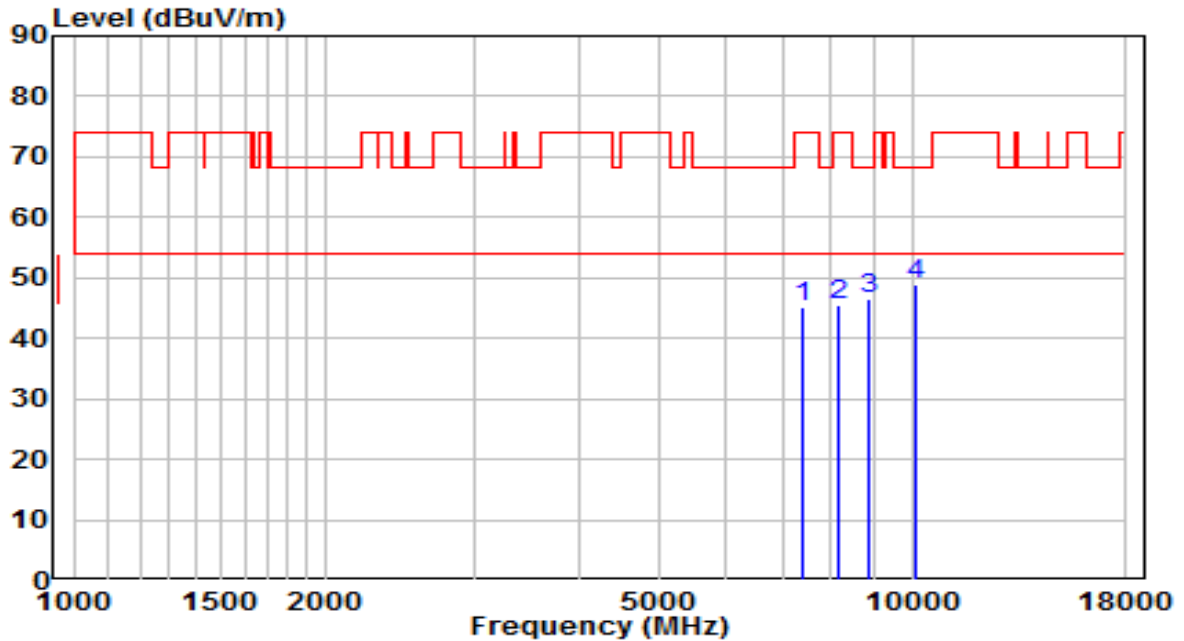


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7383.500	32.79	12.50	45.29	-28.71	74.00	Peak
2	8174.000	31.92	13.51	45.43	-28.57	74.00	Peak
3	8862.500	31.87	14.54	46.41	-21.79	68.20	Peak
4	* 10103.500	31.97	16.98	48.95	-19.25	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80+80 at channel 5530+5610MHz	Test Voltage	By PoE

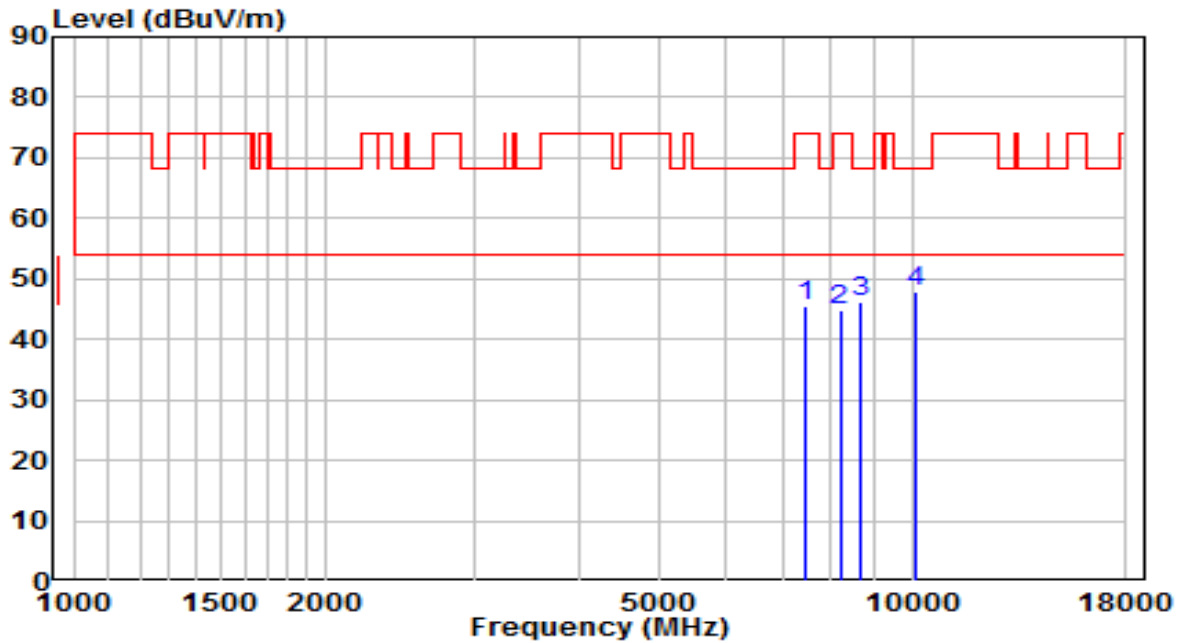


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7468.500	32.47	12.88	45.34	-28.66	74.00	Peak
2	8199.500	31.47	13.52	44.99	-29.01	74.00	Peak
3	8709.500	31.92	14.17	46.09	-22.11	68.20	Peak
4	* 10086.500	31.11	16.91	48.02	-20.18	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5180MHz	Test Voltage	By PoE

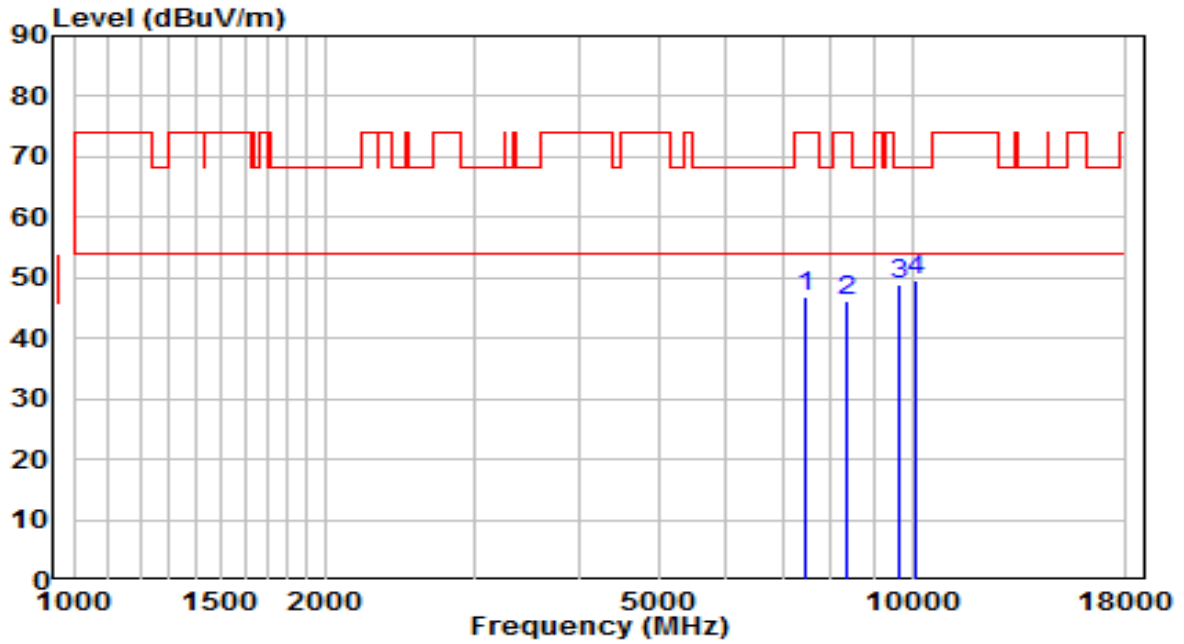


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7443.000	34.16	12.76	46.92	-27.08	74.00	Peak
2	8369.500	32.62	13.60	46.21	-27.79	74.00	Peak
3	9670.000	33.02	16.01	49.02	-19.18	68.20	Peak
4	* 10120.500	32.46	17.04	49.51	-18.69	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5180MHz	Test Voltage	By PoE

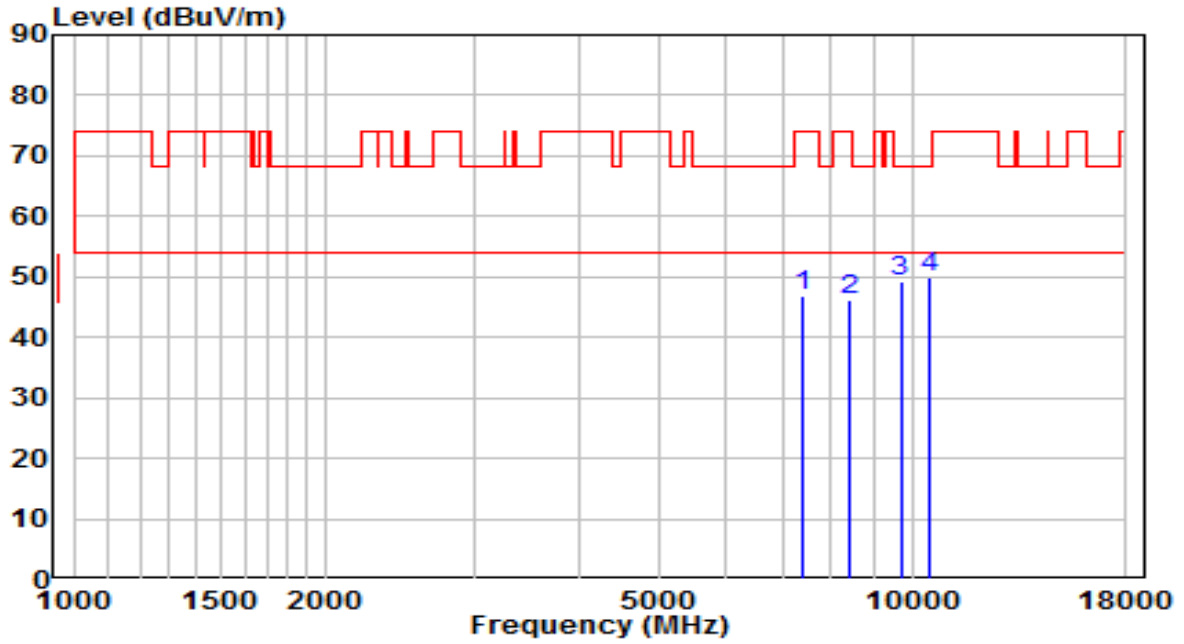


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7426.000	34.31	12.69	47.00	-27.00	74.00	Peak
2	8395.000	32.72	13.61	46.33	-27.67	74.00	Peak
3	9687.000	33.20	16.03	49.24	-18.96	68.20	Peak
4	* 10469.000	31.39	18.45	49.84	-18.36	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5220MHz	Test Voltage	By PoE

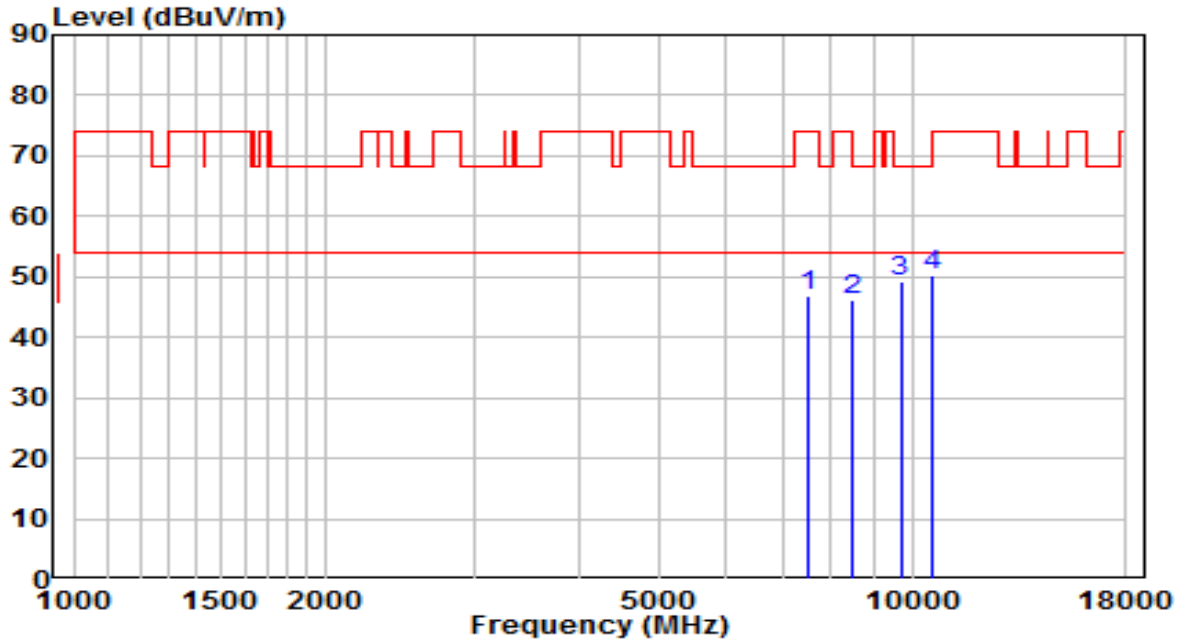


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7511.000	33.94	13.02	46.97	-27.03	74.00	Peak
2	8488.500	32.68	13.65	46.33	-27.67	74.00	Peak
3	9687.000	33.31	16.03	49.34	-18.86	68.20	Peak
4	* 10588.000	31.52	18.69	50.21	-17.99	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5220MHz	Test Voltage	By PoE

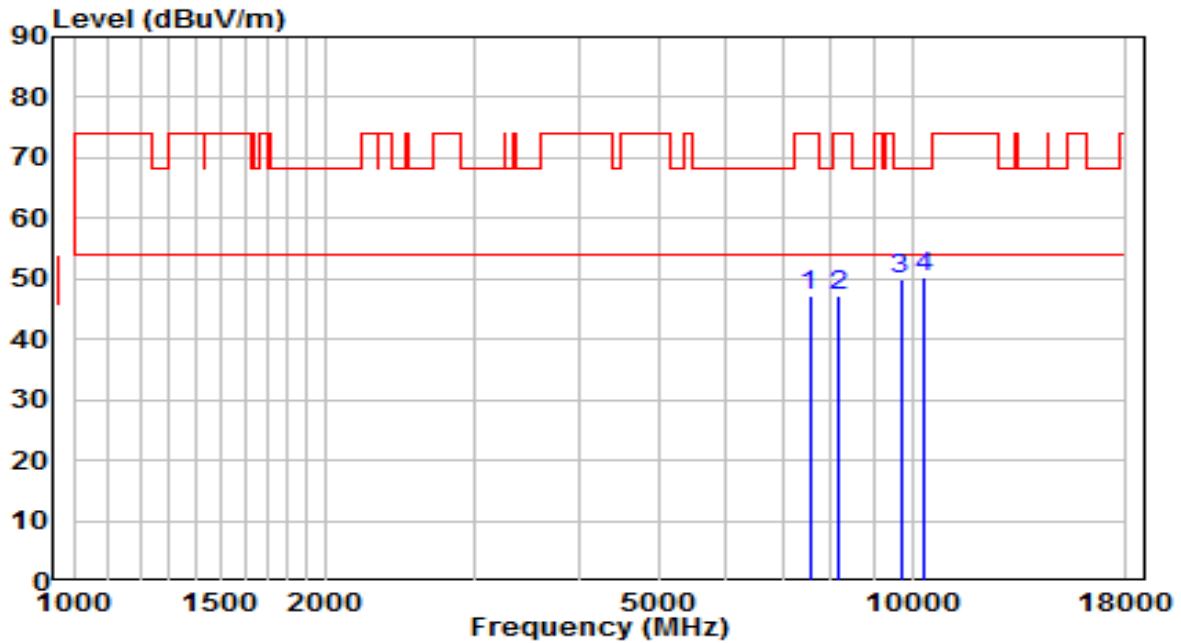


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7545.000	34.25	13.05	47.30	-26.70	74.00	Peak
2	8140.000	33.72	13.49	47.22	-26.78	74.00	Peak
3	9687.000	34.01	16.03	50.04	-18.16	68.20	Peak
4	* 10350.000	32.38	17.97	50.34	-17.86	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5240MHz	Test Voltage	By PoE

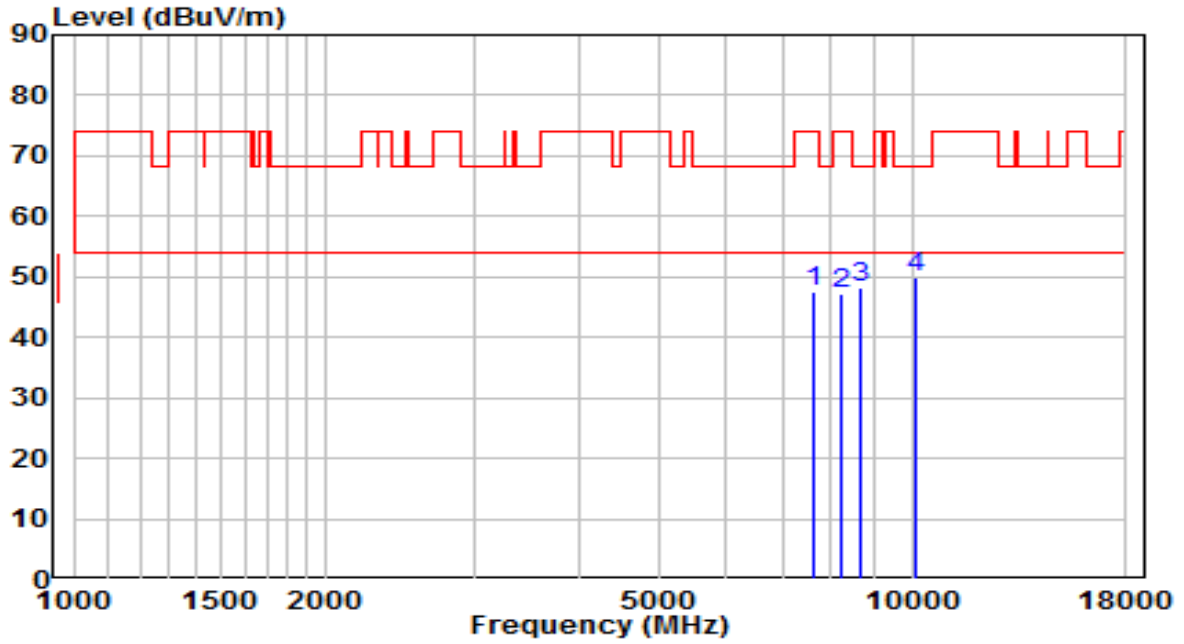


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7613.000	34.55	13.11	47.66	-26.34	74.00	Peak
2	8225.000	33.67	13.53	47.20	-26.80	74.00	Peak
3	8684.000	34.01	14.11	48.12	-20.08	68.20	Peak
4	* 10129.000	32.71	17.08	49.78	-18.42	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5240MHz	Test Voltage	By PoE

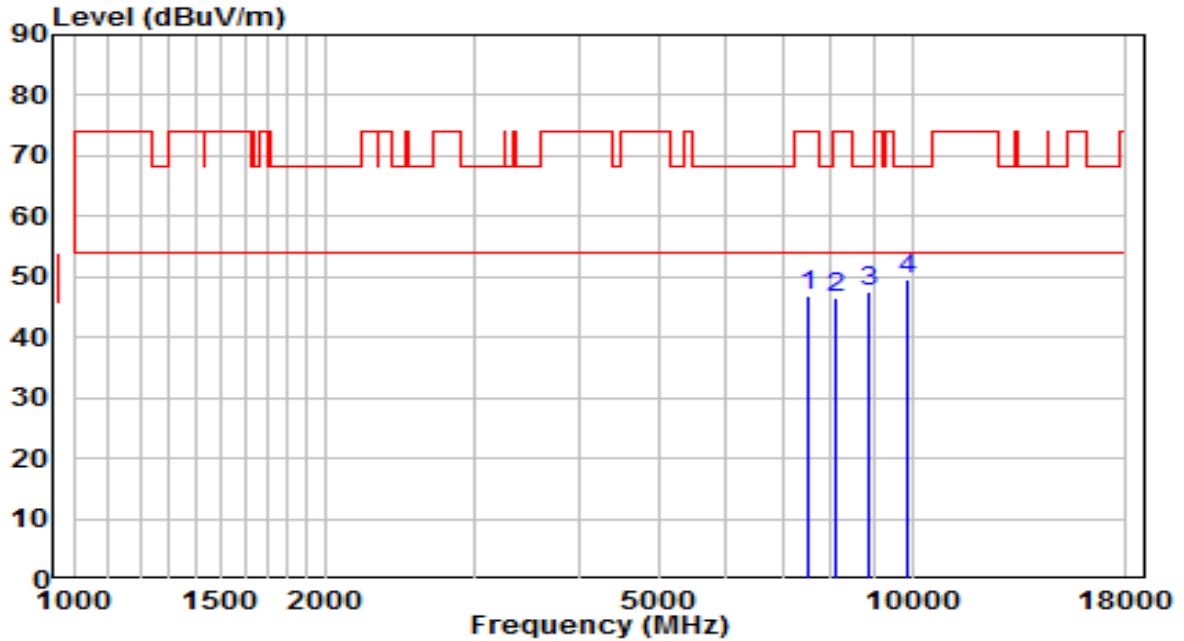


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7502.500	33.73	13.02	46.74	-27.26	74.00	Peak
2	8114.500	32.98	13.48	46.46	-27.54	74.00	Peak
3	8905.000	32.87	14.65	47.52	-20.68	68.20	Peak
4	* 9891.000	33.13	16.38	49.51	-18.69	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5260MHz	Test Voltage	By PoE

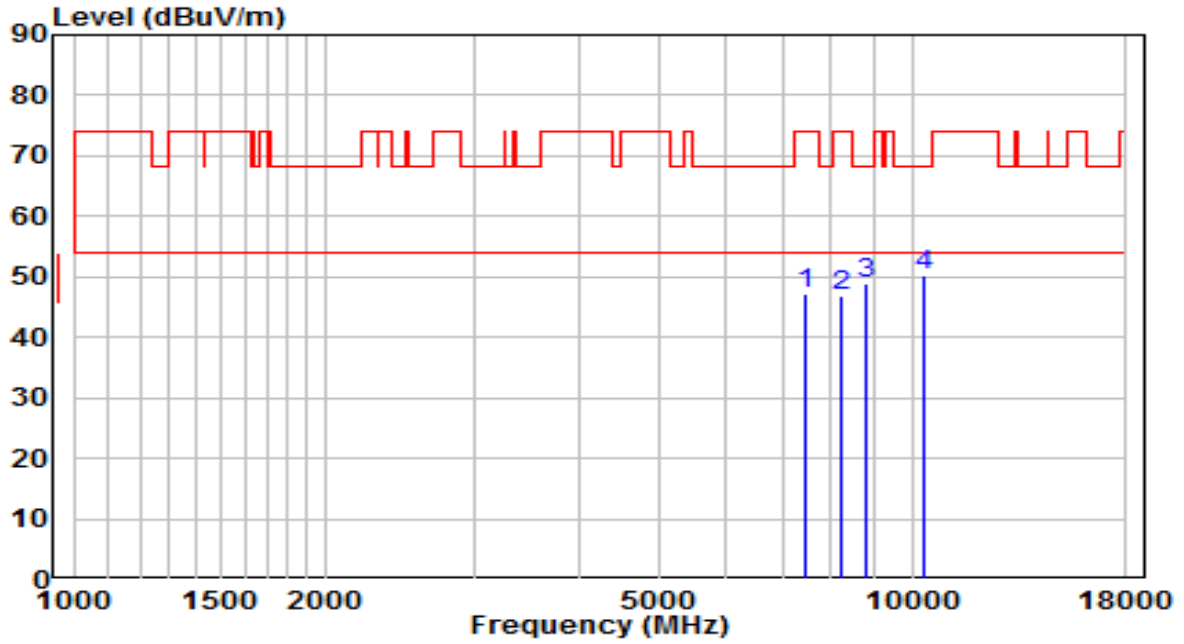


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7477.000	34.45	12.91	47.37	-26.63	74.00	Peak
2	8242.000	33.30	13.54	46.84	-27.16	74.00	Peak
3	8811.500	34.54	14.42	48.96	-19.24	68.20	Peak
4	* 10299.000	32.65	17.76	50.41	-17.79	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5260MHz	Test Voltage	By PoE

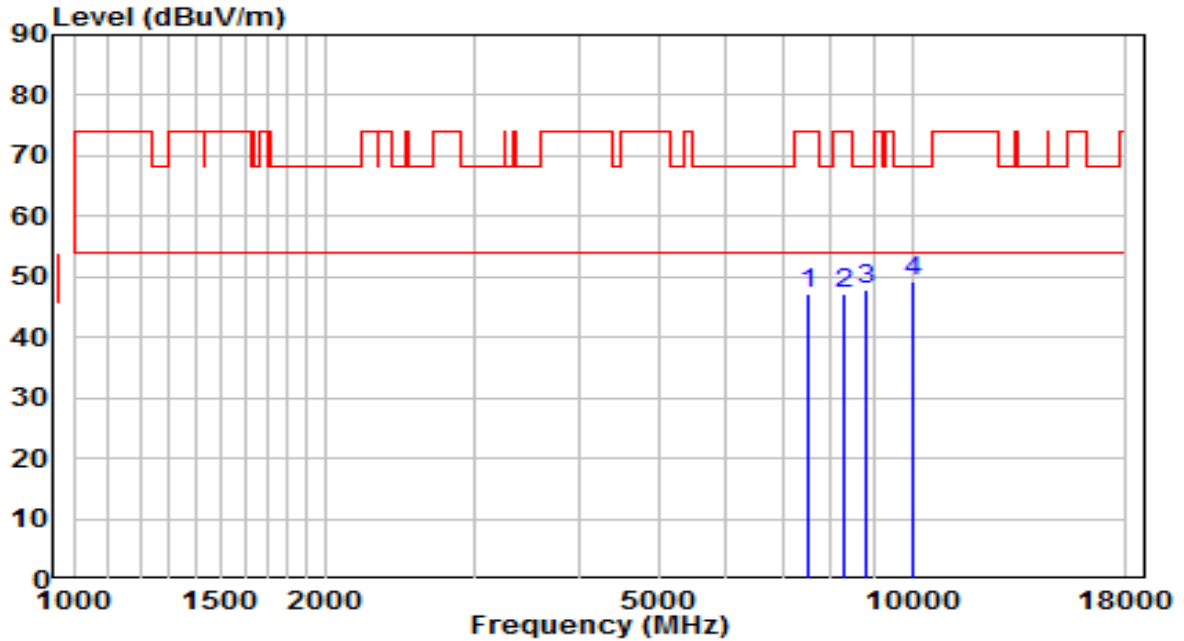


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7494.000	34.20	12.99	47.19	-26.81	74.00	Peak
2	8267.500	33.65	13.55	47.20	-26.80	74.00	Peak
3	8786.000	33.46	14.36	47.82	-20.38	68.20	Peak
4	* 10052.500	32.62	16.77	49.39	-18.81	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5320MHz	Test Voltage	By PoE

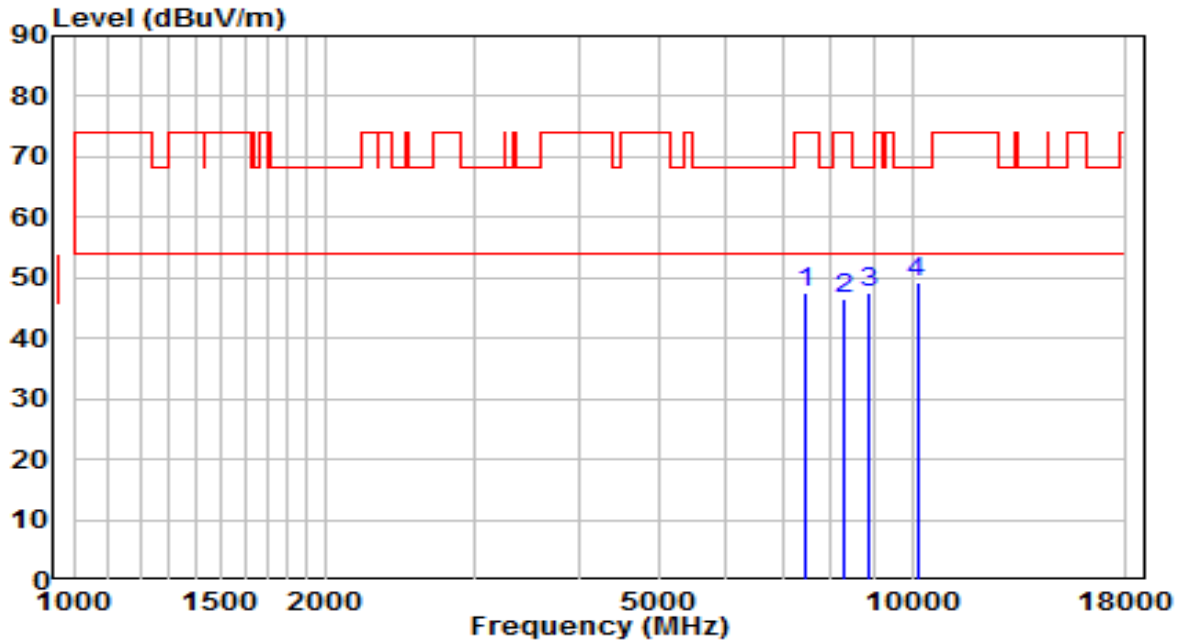


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7468.500	34.69	12.88	47.56	-26.44	74.00	Peak
2	8318.500	32.83	13.57	46.41	-27.59	74.00	Peak
3	8854.000	33.14	14.52	47.66	-20.54	68.20	Peak
4	* 10137.500	32.15	17.11	49.27	-18.93	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5320MHz	Test Voltage	By PoE

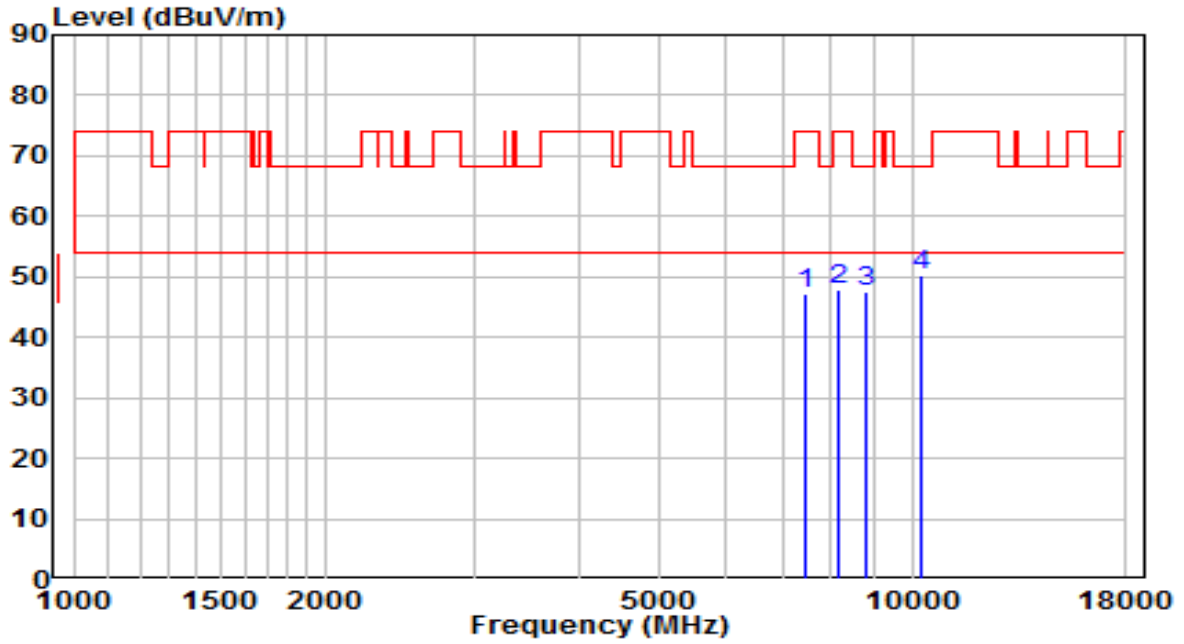


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7434.500	34.33	12.72	47.05	-26.95	74.00	Peak
2	8174.000	34.24	13.51	47.75	-26.25	74.00	Peak
3	8837.000	33.14	14.48	47.62	-20.58	68.20	Peak
4	* 10282.000	32.44	17.69	50.14	-18.06	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5500MHz	Test Voltage	By PoE

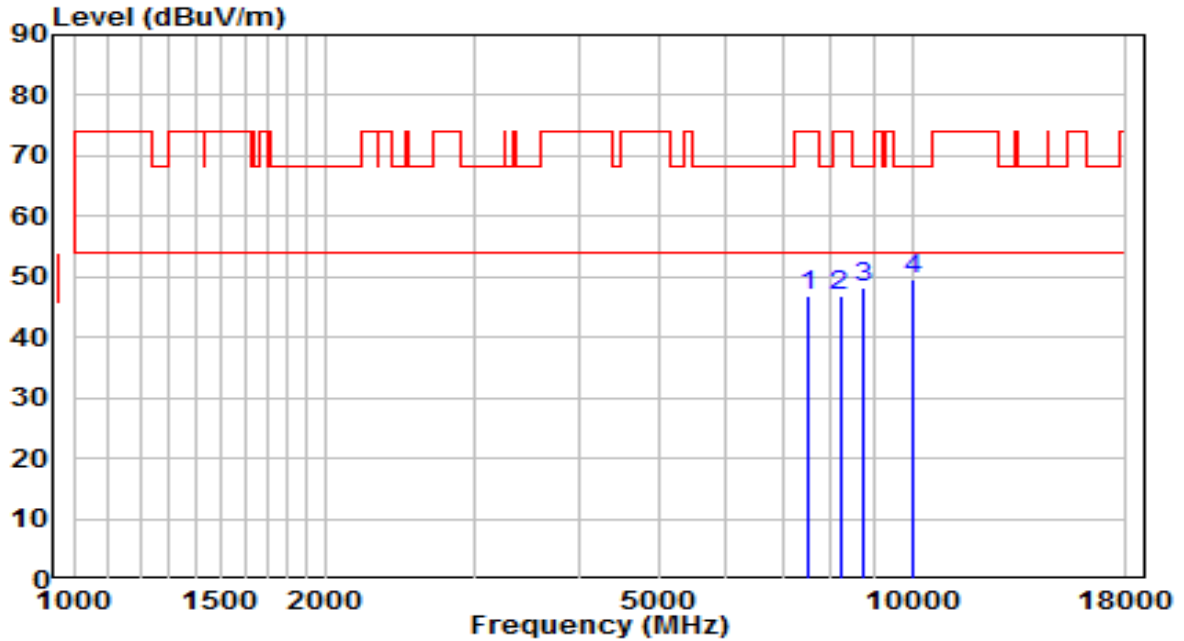


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7511.000	33.97	13.02	46.99	-27.01	74.00	Peak
2	8199.500	33.23	13.52	46.75	-27.25	74.00	Peak
3	8735.000	33.92	14.23	48.15	-20.05	68.20	Peak
4	* 10035.500	33.02	16.70	49.72	-18.48	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5500MHz	Test Voltage	By PoE

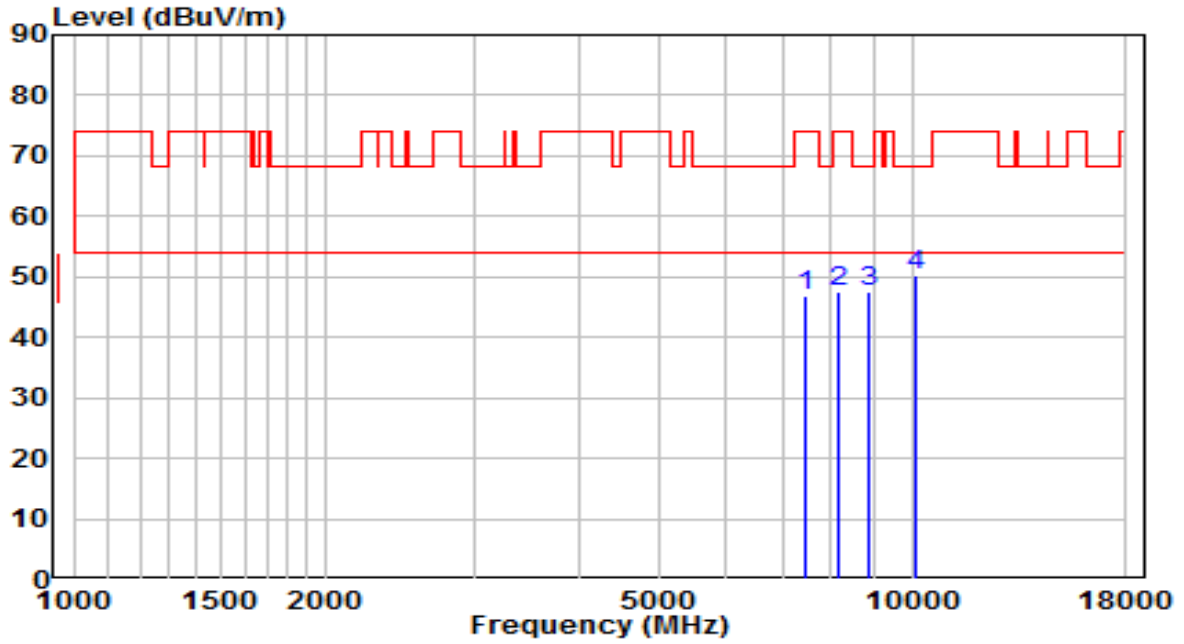


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7468.500	34.01	12.88	46.89	-27.11	74.00	Peak
2	8191.000	34.00	13.52	47.52	-26.48	74.00	Peak
3	8879.500	33.05	14.58	47.64	-20.56	68.20	Peak
4	* 10095.000	33.40	16.94	50.34	-17.86	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5580MHz	Test Voltage	By PoE

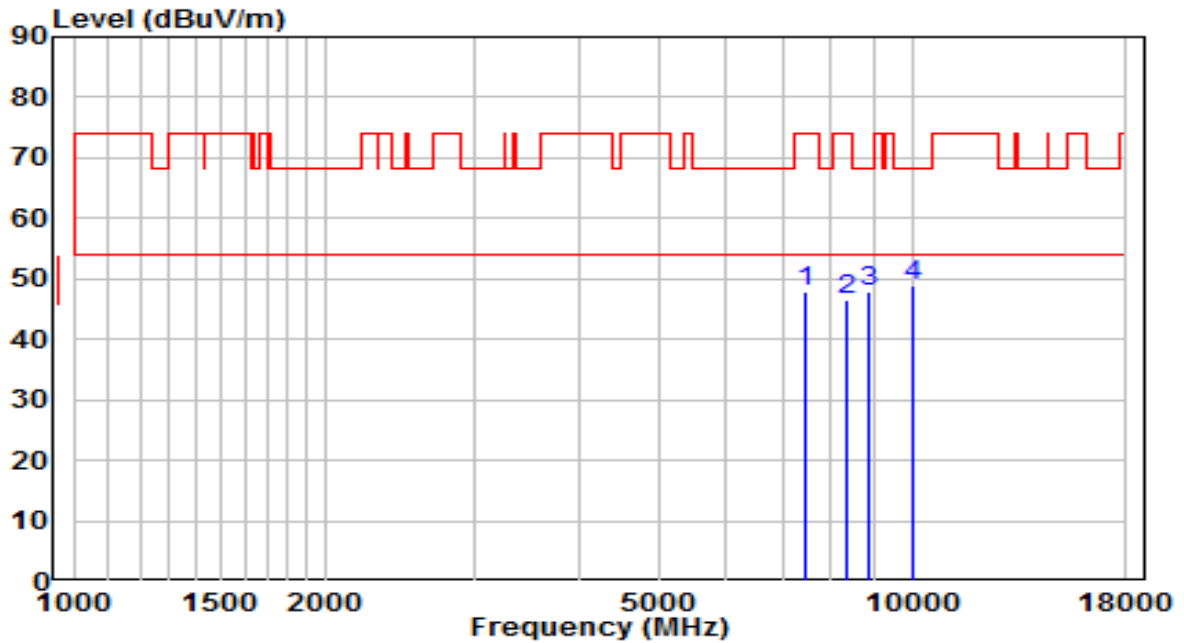


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7468.500	34.87	12.88	47.74	-26.26	74.00	Peak
2	8327.000	32.81	13.58	46.39	-27.61	74.00	Peak
3	8896.500	33.34	14.63	47.97	-20.23	68.20	Peak
4	* 10035.500	32.07	16.70	48.78	-19.42	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5580MHz	Test Voltage	By PoE

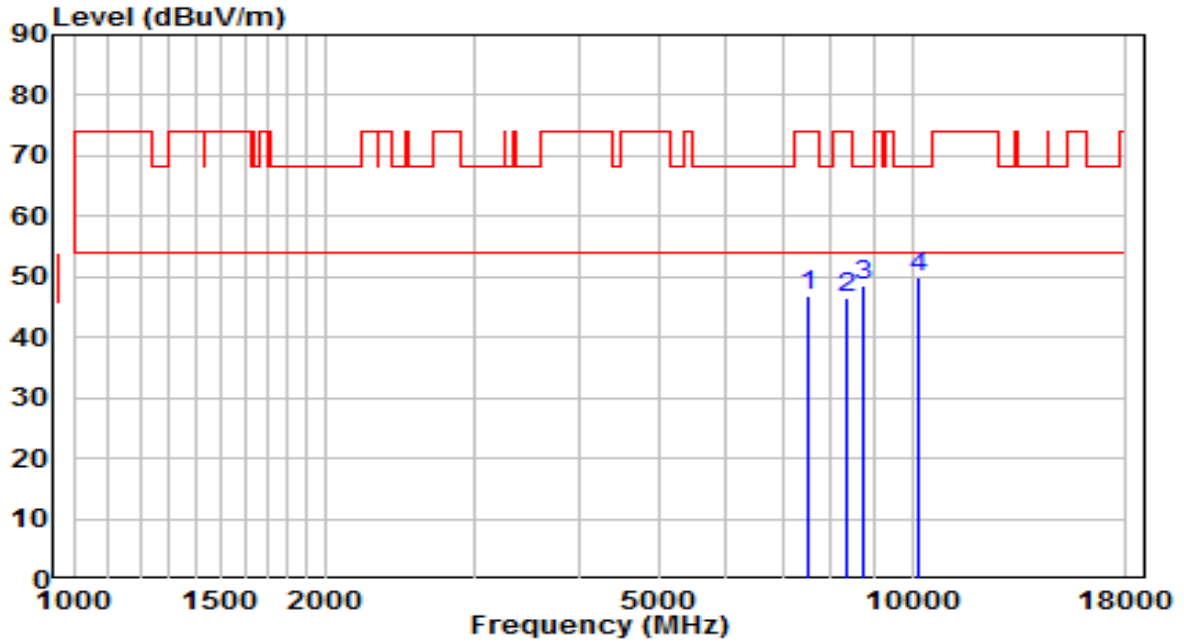


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7528.000	33.92	13.04	46.96	-27.04	74.00	Peak
2	8344.000	32.83	13.58	46.42	-27.58	74.00	Peak
3	8718.000	34.34	14.19	48.53	-19.67	68.20	Peak
4	* 10163.000	32.69	17.22	49.91	-18.29	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5700MHz	Test Voltage	By PoE

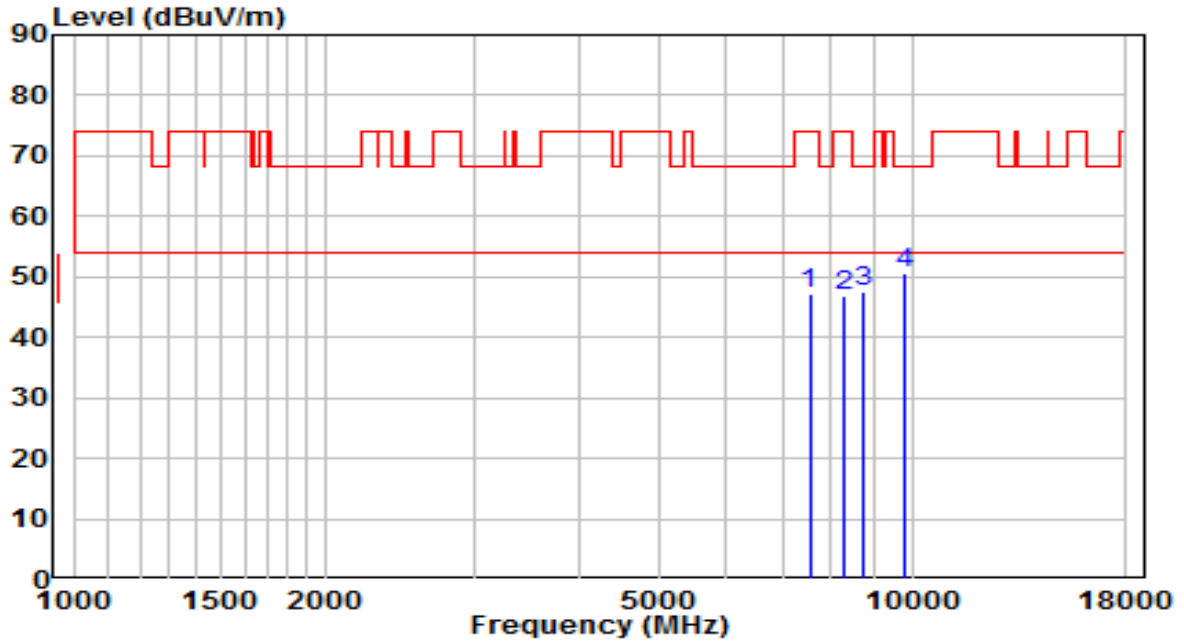


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7545.000	34.20	13.05	47.25	-26.75	74.00	Peak
2	8293.000	33.16	13.56	46.72	-27.28	74.00	Peak
3	8769.000	33.17	14.31	47.48	-20.72	68.20	Peak
4	* 9772.000	34.35	16.18	50.52	-17.68	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5700MHz	Test Voltage	By PoE

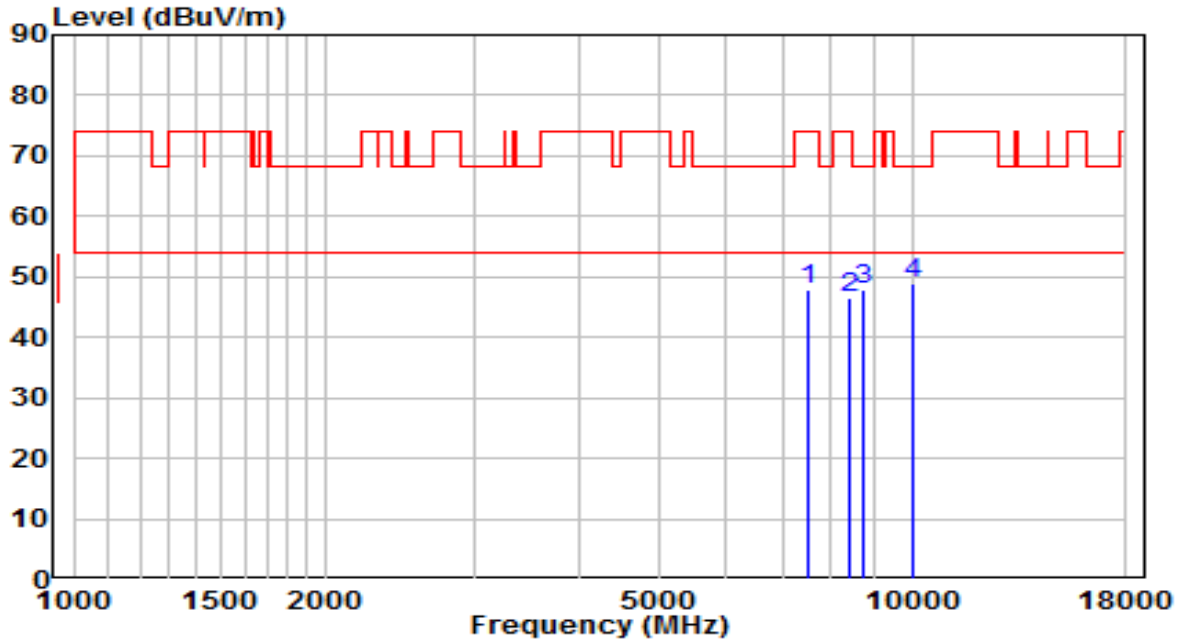


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7536.500	34.93	13.05	47.97	-26.03	74.00	Peak
2	8403.500	32.85	13.61	46.46	-27.54	74.00	Peak
3	8769.000	33.72	14.31	48.03	-20.17	68.20	Peak
4	* 10027.000	32.22	16.67	48.89	-19.31	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5720MHz	Test Voltage	By PoE

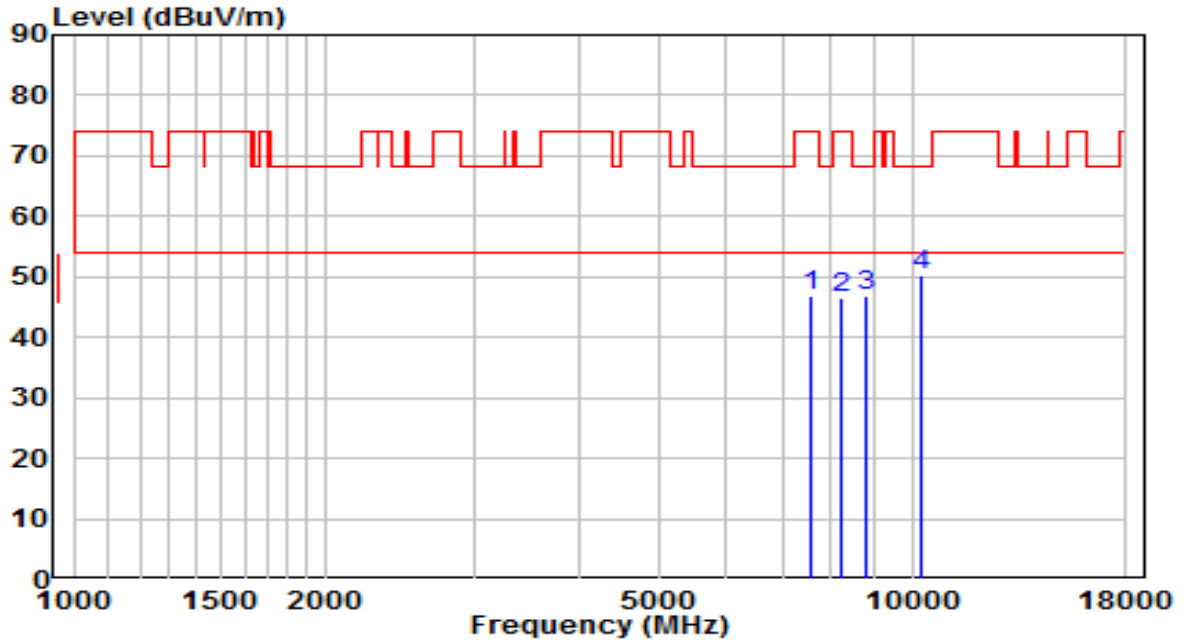


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7587.500	33.92	13.09	47.01	-26.99	74.00	Peak
2	8233.500	32.83	13.54	46.37	-27.63	74.00	Peak
3	8837.000	32.55	14.48	47.03	-21.17	68.20	Peak
4	* 10248.000	32.81	17.56	50.37	-17.83	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5720MHz	Test Voltage	By PoE

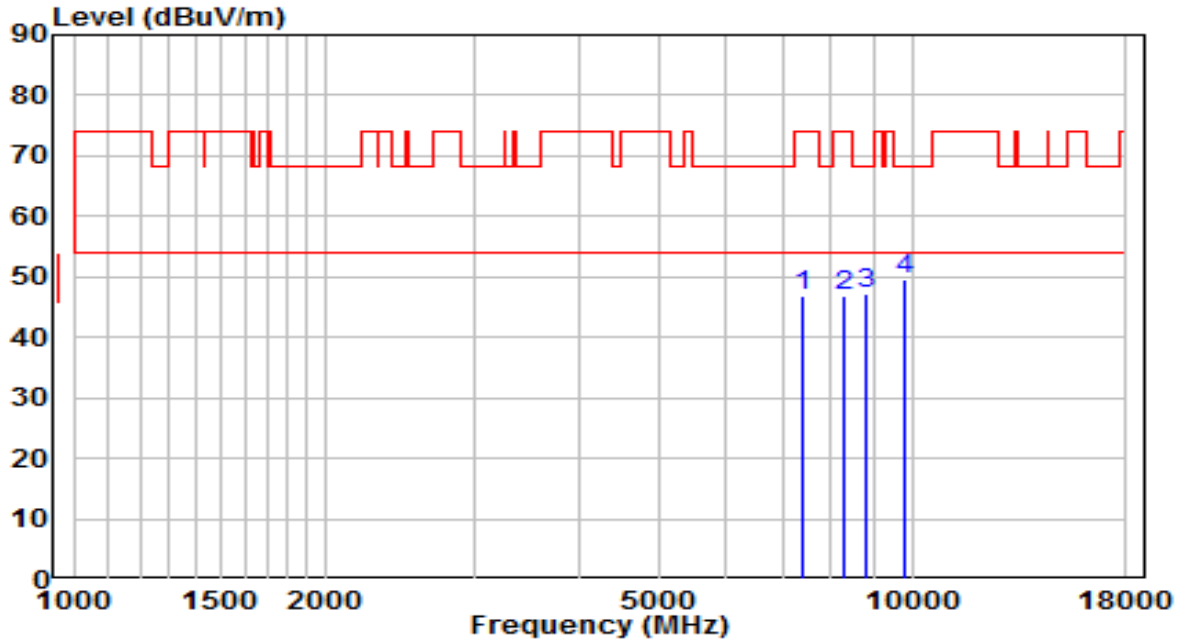


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7426.000	34.34	12.69	47.02	-26.98	74.00	Peak
2	8318.500	33.16	13.57	46.73	-27.27	74.00	Peak
3	8828.500	32.70	14.46	47.16	-21.04	68.20	Peak
4	* 9823.000	33.34	16.26	49.60	-18.60	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5745MHz	Test Voltage	By PoE

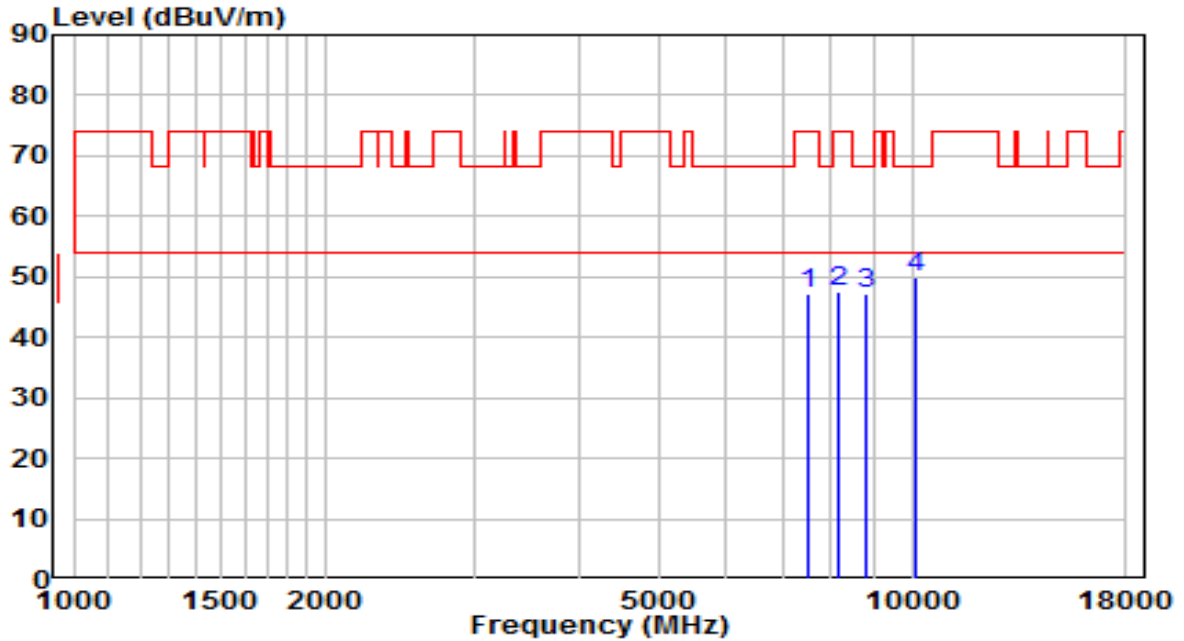


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7511.000	34.09	13.02	47.12	-26.88	74.00	Peak
2	8191.000	34.14	13.52	47.65	-26.35	74.00	Peak
3	8837.000	32.88	14.48	47.36	-20.84	68.20	Peak
4	* 10078.000	32.92	16.87	49.79	-18.41	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5745MHz	Test Voltage	By PoE

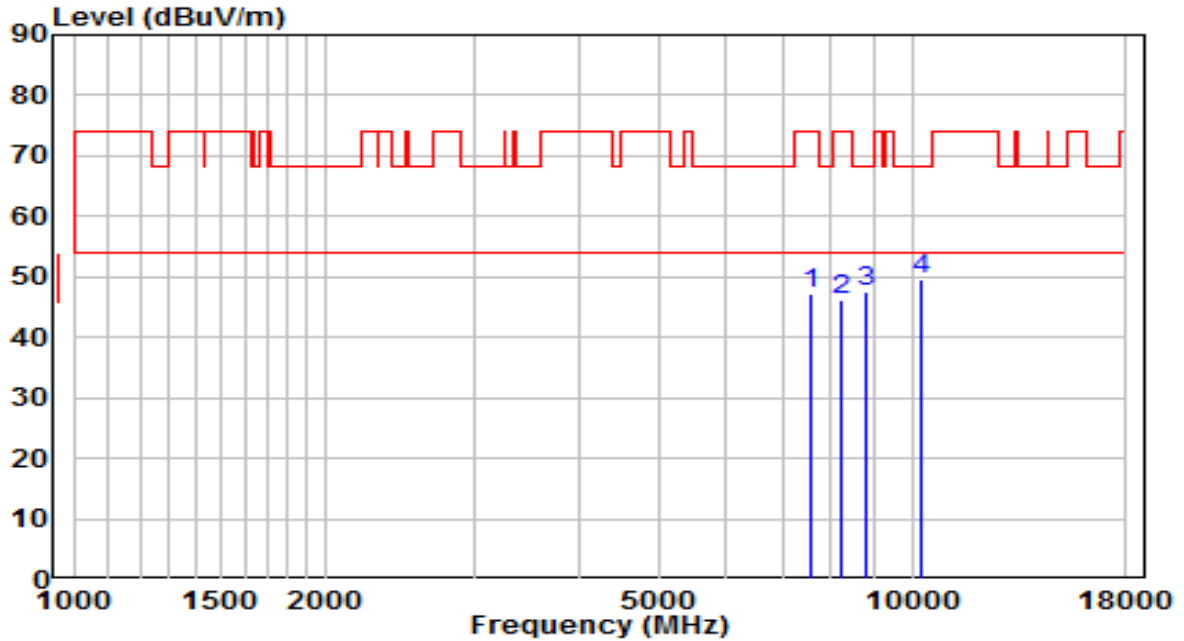


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7587.500	34.19	13.09	47.27	-26.73	74.00	Peak
2	8250.500	32.71	13.54	46.25	-27.75	74.00	Peak
3	8837.000	33.06	14.48	47.54	-20.66	68.20	Peak
4	* 10239.500	32.08	17.52	49.61	-18.59	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5785MHz	Test Voltage	By PoE

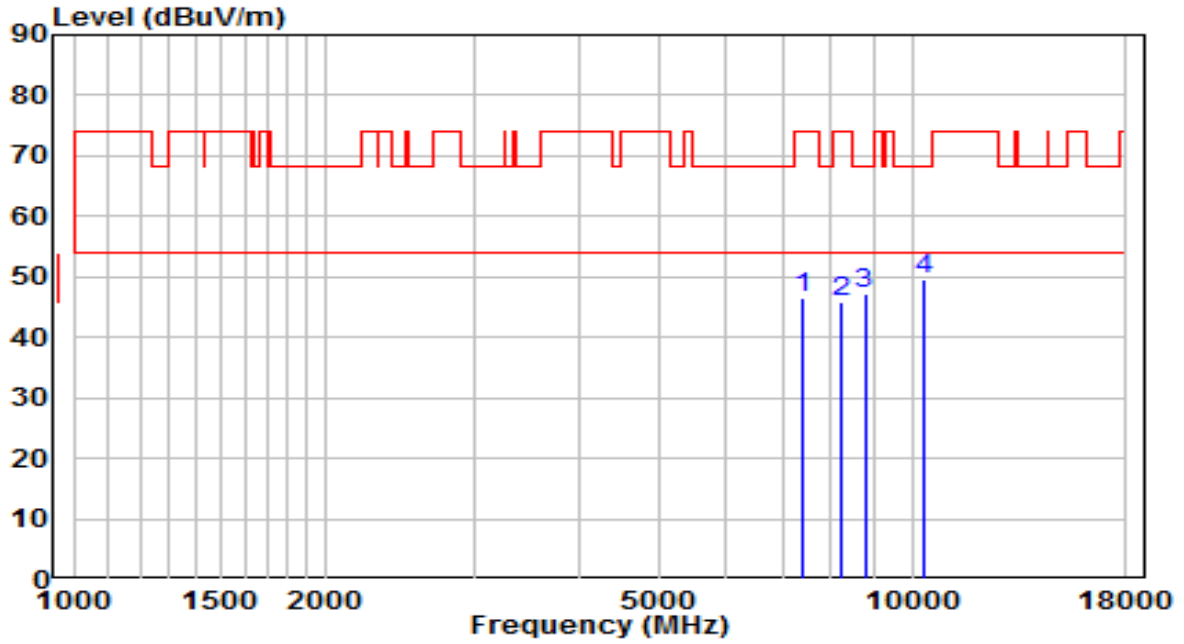


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7426.000	33.85	12.69	46.54	-27.46	74.00	Peak
2	8259.000	32.31	13.55	45.86	-28.14	74.00	Peak
3	8777.500	32.78	14.33	47.12	-21.08	68.20	Peak
4	* 10299.000	31.71	17.76	49.47	-18.73	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5785MHz	Test Voltage	By PoE

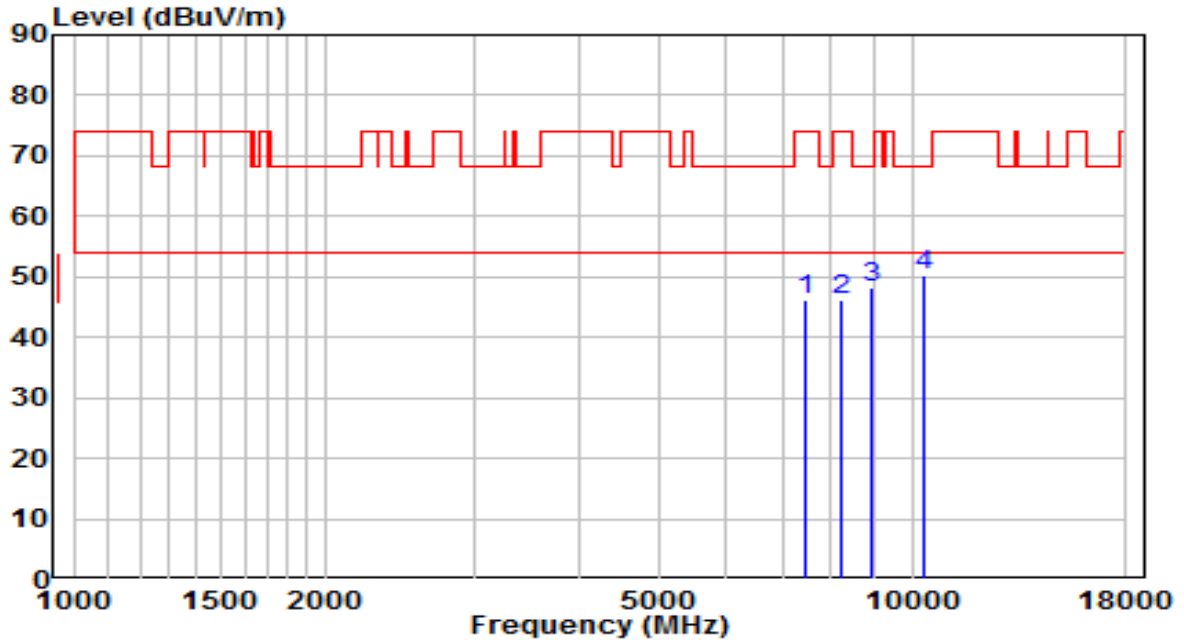


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7443.000	33.57	12.76	46.33	-27.67	74.00	Peak
2	8242.000	32.65	13.54	46.19	-27.81	74.00	Peak
3	8930.500	33.46	14.71	48.17	-20.03	68.20	Peak
4	* 10333.000	32.23	17.90	50.13	-18.07	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5825MHz	Test Voltage	By PoE

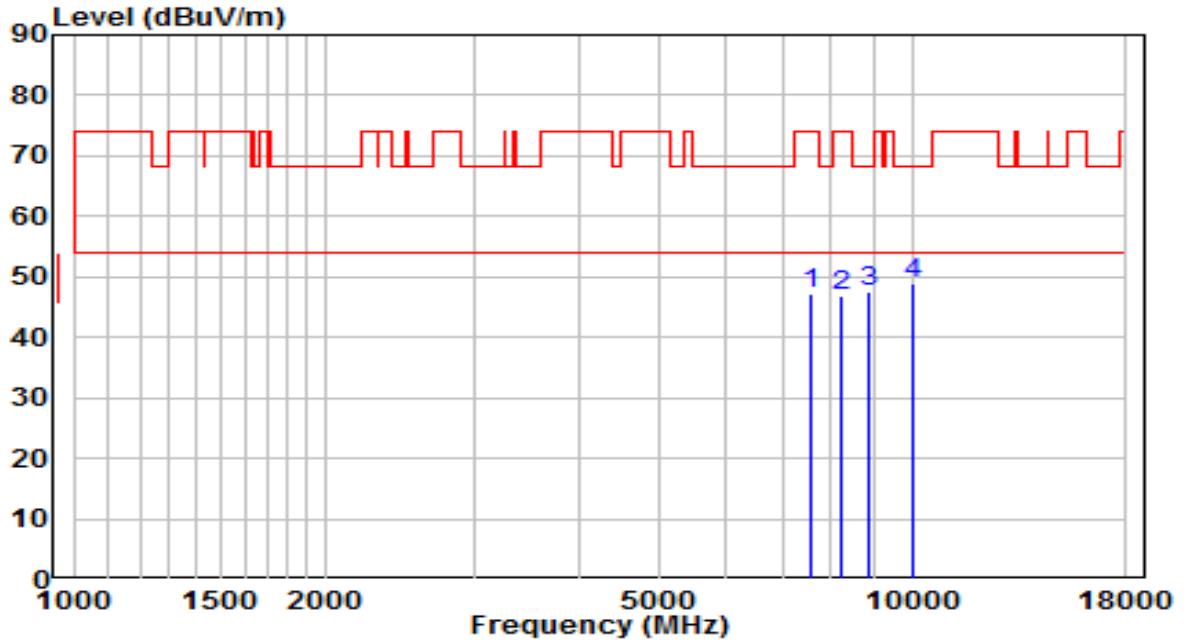


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7553.500	34.22	13.06	47.28	-26.72	74.00	Peak
2	8233.500	33.38	13.54	46.92	-27.08	74.00	Peak
3	8879.500	33.03	14.58	47.62	-20.58	68.20	Peak
4	* 10010.000	32.47	16.60	49.07	-19.13	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at channel 5825MHz	Test Voltage	By PoE

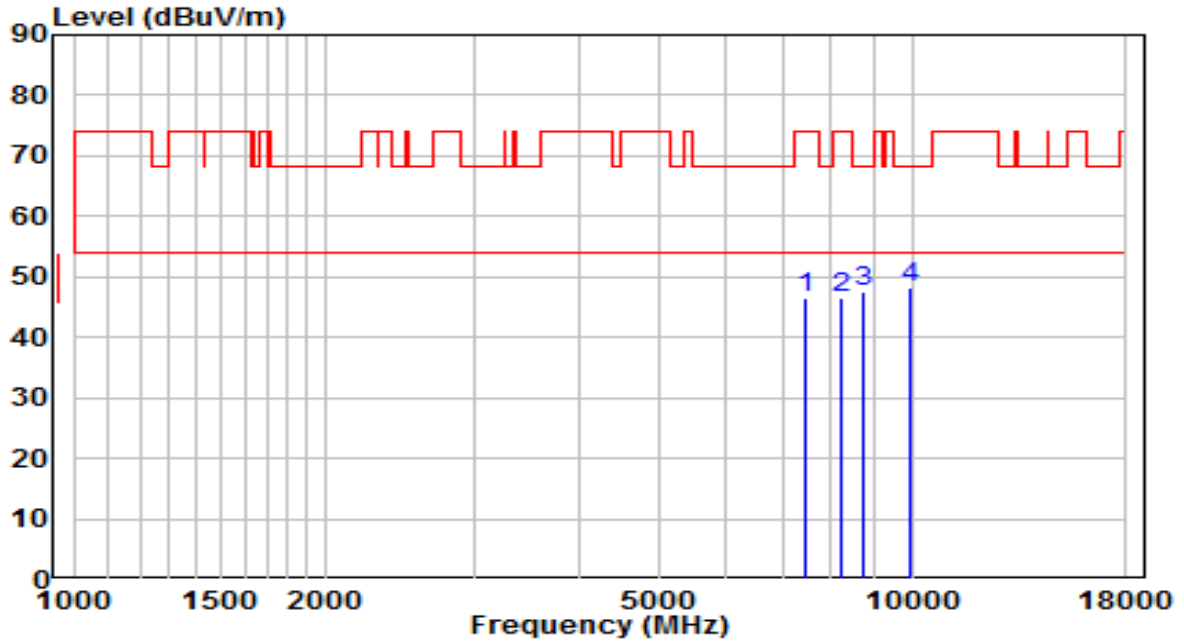


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7485.500	33.50	12.95	46.45	-27.55	74.00	Peak
2	8225.000	33.10	13.53	46.63	-27.37	74.00	Peak
3	8735.000	33.28	14.23	47.51	-20.69	68.20	Peak
4	* 9942.000	31.65	16.46	48.12	-20.08	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5190MHz	Test Voltage	By PoE

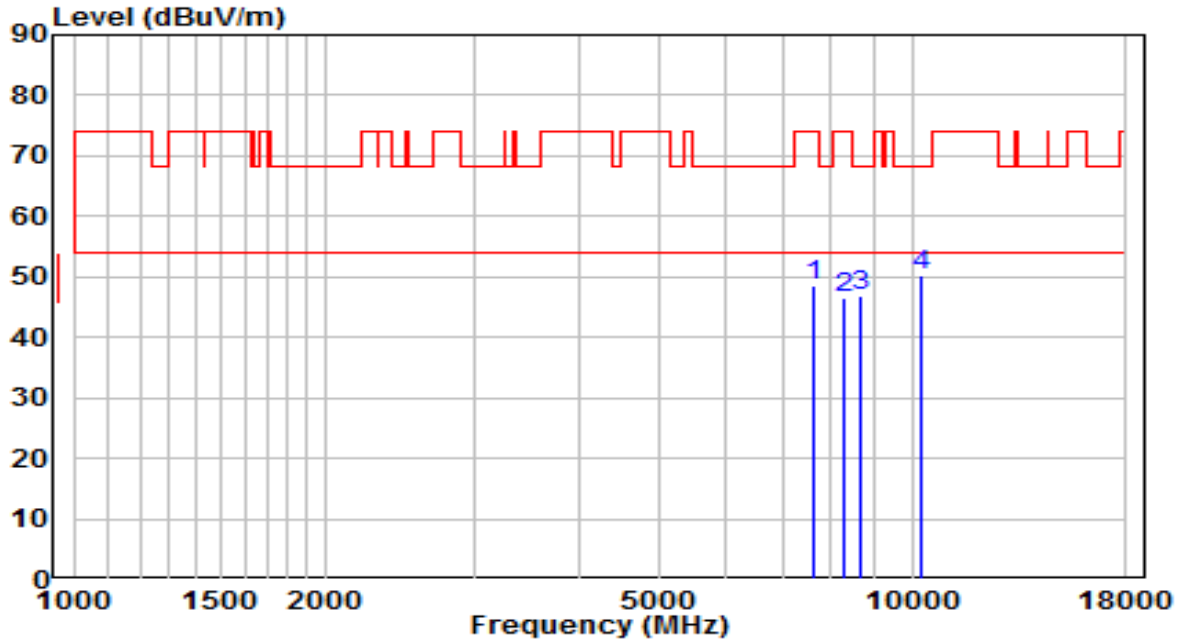


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7638.500	35.29	13.13	48.42	-25.58	74.00	Peak
2	8318.500	32.86	13.57	46.43	-27.57	74.00	Peak
3	8692.500	32.87	14.13	46.99	-21.21	68.20	Peak
4	* 10282.000	32.62	17.69	50.31	-17.89	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5190MHz	Test Voltage	By PoE

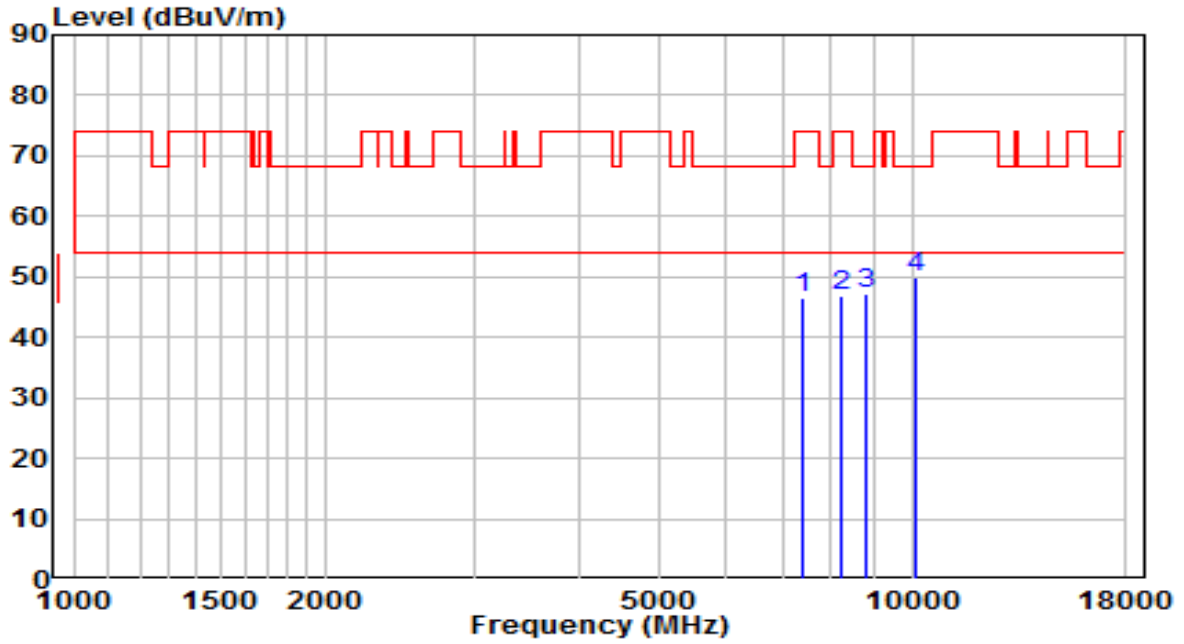


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7409.000	34.01	12.61	46.62	-27.38	74.00	Peak
2	8216.500	33.19	13.53	46.72	-27.28	74.00	Peak
3	8811.500	32.69	14.42	47.11	-21.09	68.20	Peak
4	* 10129.000	32.98	17.08	50.06	-18.14	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5230MHz	Test Voltage	By PoE

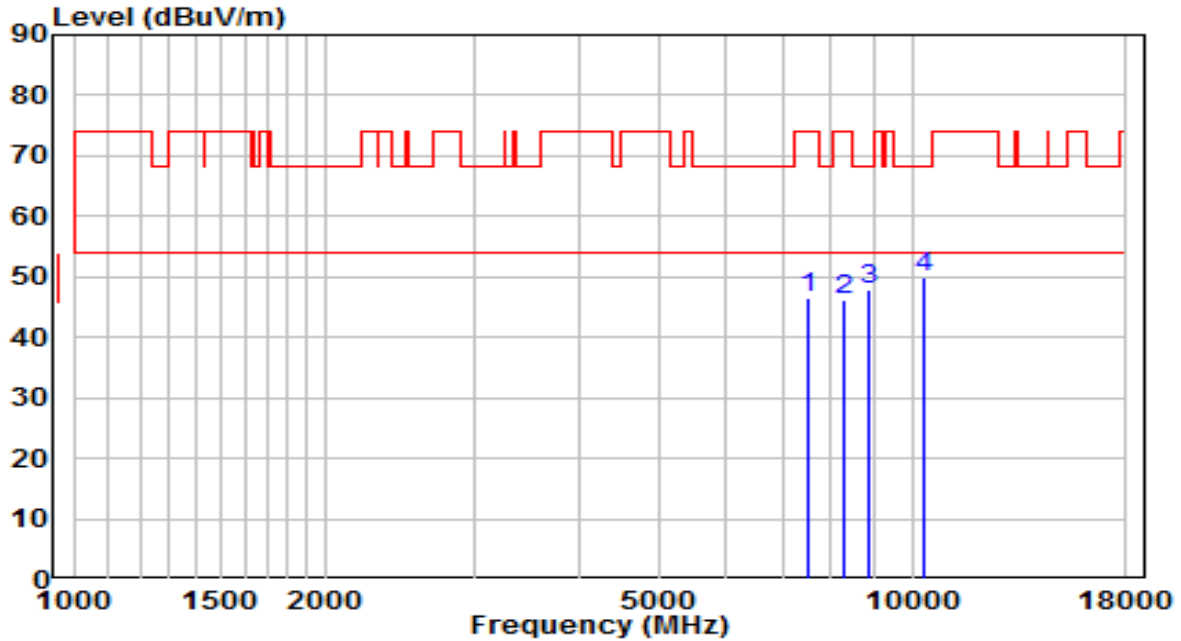


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7519.500	33.35	13.03	46.38	-27.62	74.00	Peak
2	8276.000	32.62	13.55	46.17	-27.83	74.00	Peak
3	8871.000	33.48	14.56	48.05	-20.15	68.20	Peak
4	* 10333.000	31.89	17.90	49.79	-18.41	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5230MHz	Test Voltage	By PoE

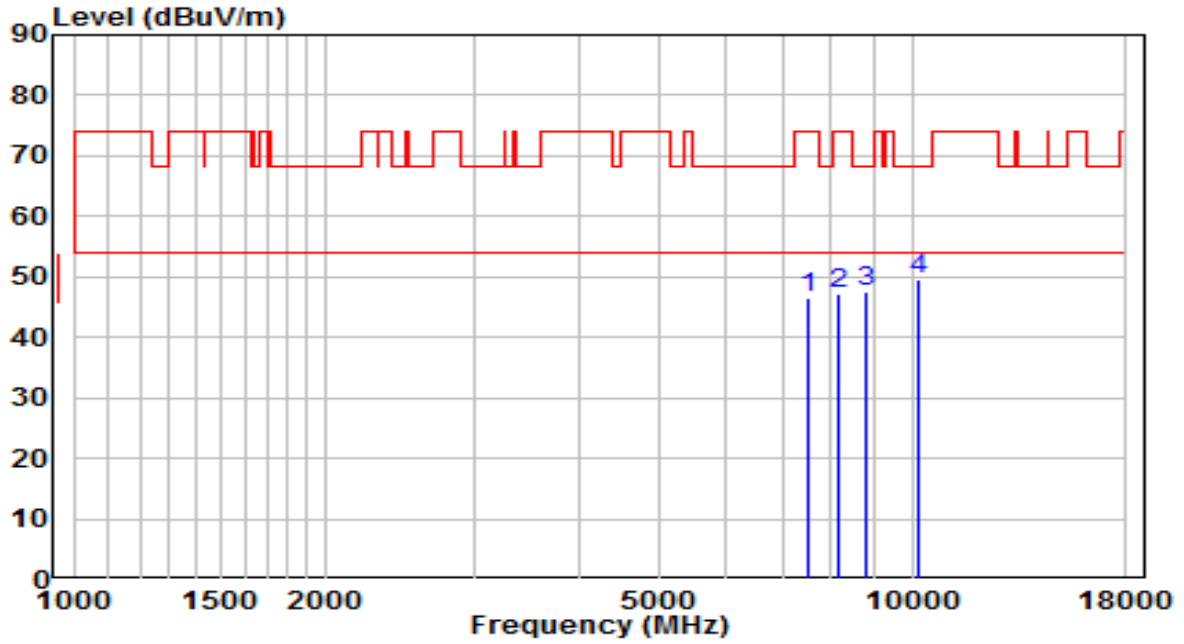


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7511.000	33.64	13.02	46.66	-27.34	74.00	Peak
2	8174.000	33.57	13.51	47.08	-26.92	74.00	Peak
3	8820.000	33.00	14.44	47.44	-20.76	68.20	Peak
4	* 10163.000	32.32	17.22	49.54	-18.66	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5270MHz	Test Voltage	By PoE

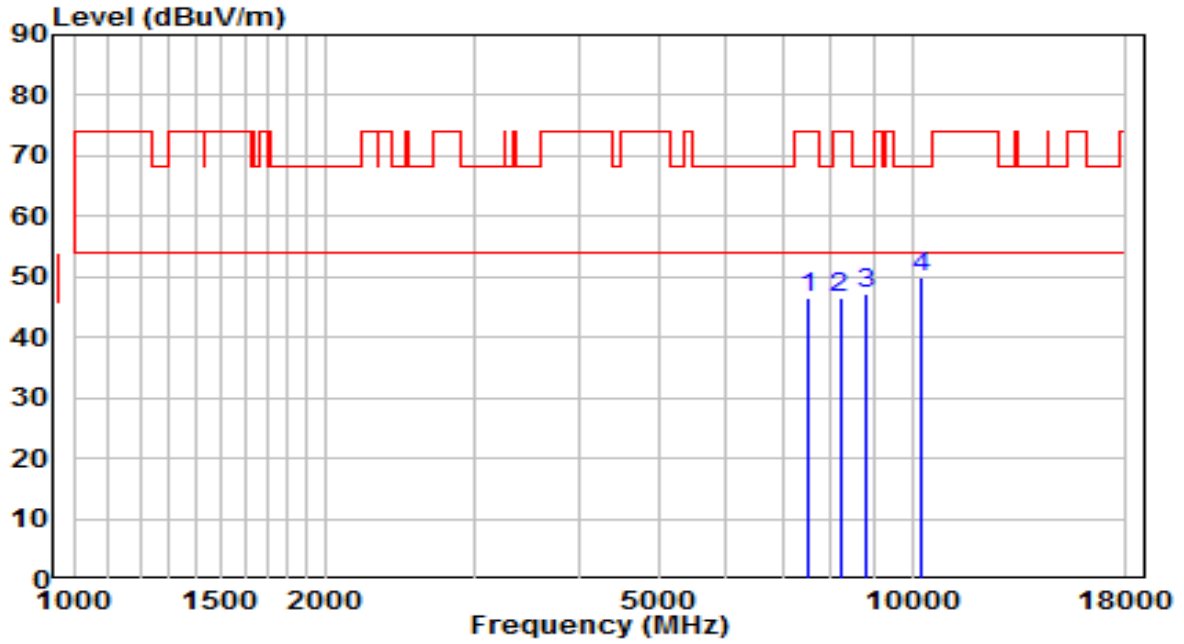


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7502.500	33.42	13.02	46.44	-27.56	74.00	Peak
2	8199.500	32.91	13.52	46.43	-27.57	74.00	Peak
3	8811.500	32.92	14.42	47.33	-20.87	68.20	Peak
4	* 10282.000	32.17	17.69	49.87	-18.33	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5270MHz	Test Voltage	By PoE

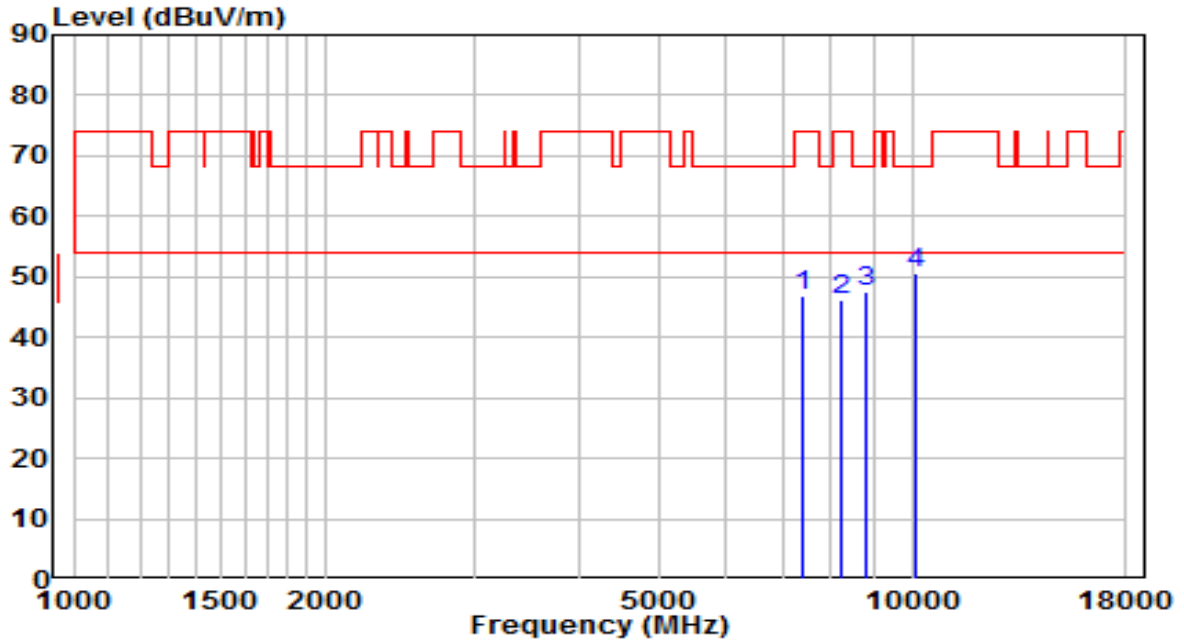


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7400.500	34.21	12.57	46.78	-27.22	74.00	Peak
2	8242.000	32.61	13.54	46.15	-27.85	74.00	Peak
3	8786.000	33.22	14.36	47.57	-20.63	68.20	Peak
4	* 10129.000	33.52	17.08	50.59	-17.61	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5310MHz	Test Voltage	By PoE

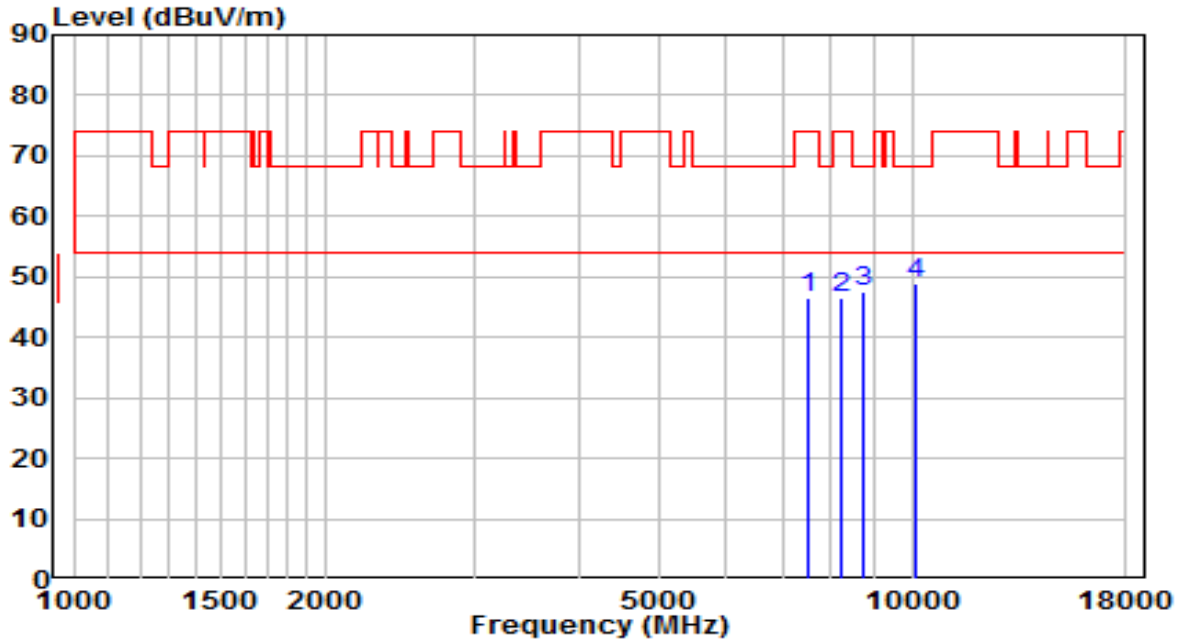


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7502.500	33.64	13.02	46.66	-27.34	74.00	Peak
2	8233.500	32.93	13.54	46.46	-27.54	74.00	Peak
3	8769.000	33.16	14.31	47.47	-20.73	68.20	Peak
4	* 10129.000	31.97	17.08	49.05	-19.15	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5310MHz	Test Voltage	By PoE

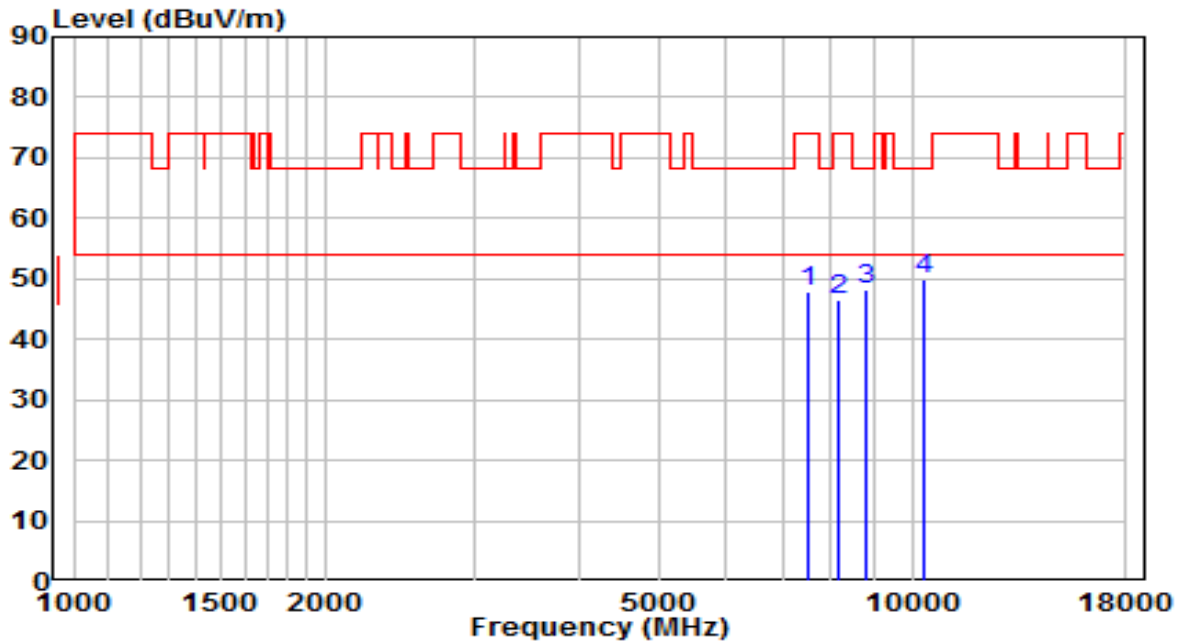


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7502.500	34.72	13.02	47.74	-26.26	74.00	Peak
2	8140.000	33.17	13.49	46.67	-27.33	74.00	Peak
3	8837.000	33.64	14.48	48.12	-20.08	68.20	Peak
4	* 10341.500	32.08	17.93	50.01	-18.19	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5510MHz	Test Voltage	By PoE

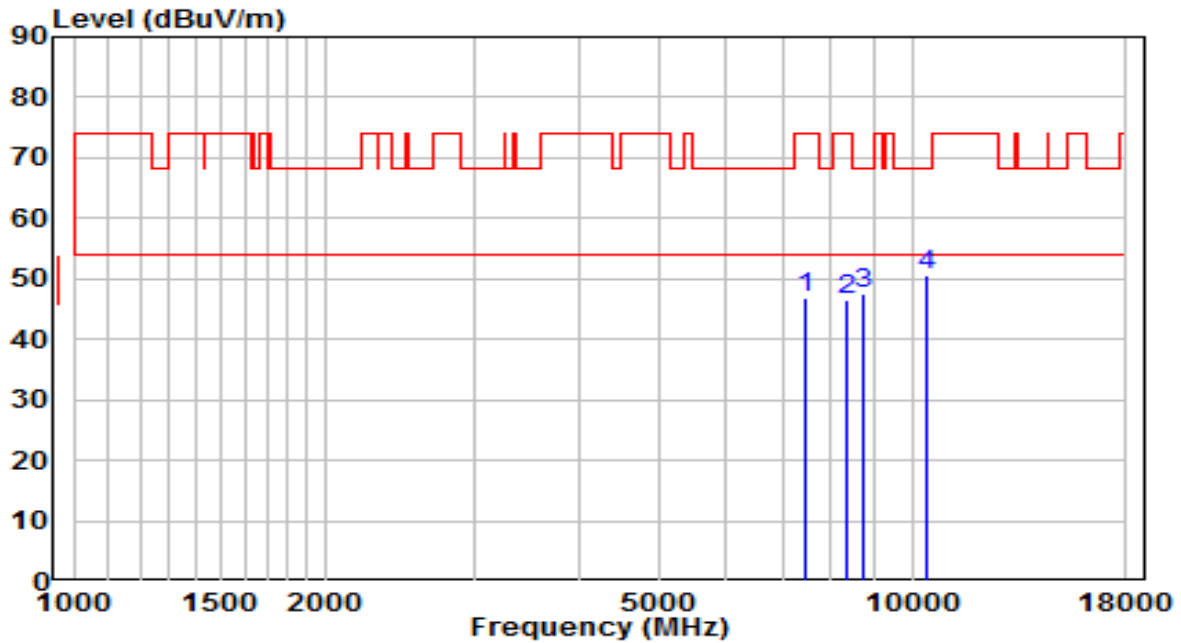


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7468.500	34.07	12.88	46.94	-27.06	74.00	Peak
2	8335.500	32.96	13.58	46.54	-27.46	74.00	Peak
3	8726.500	33.46	14.21	47.67	-20.53	68.20	Peak
4	* 10443.500	32.36	18.34	50.70	-17.50	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5510MHz	Test Voltage	By PoE

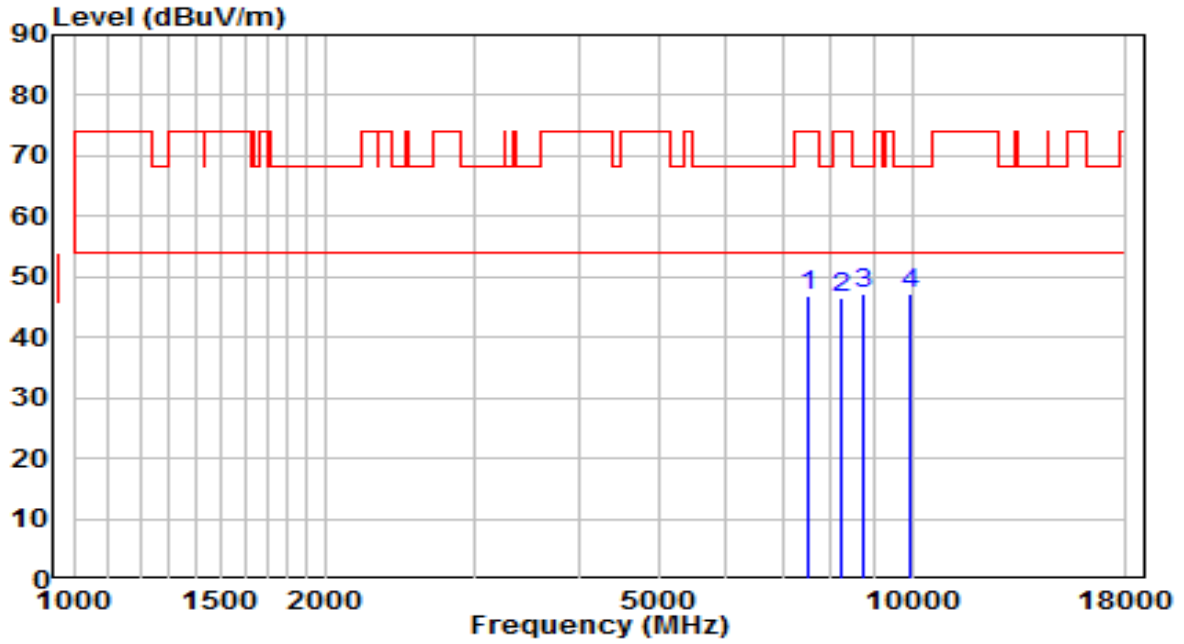


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7494.000	33.93	12.99	46.92	-27.08	74.00	Peak
2	8233.500	32.96	13.54	46.50	-27.50	74.00	Peak
3	* 8718.000	33.08	14.19	47.27	-20.93	68.20	Peak
4	9967.500	30.70	16.51	47.21	-20.99	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5550MHz	Test Voltage	By PoE

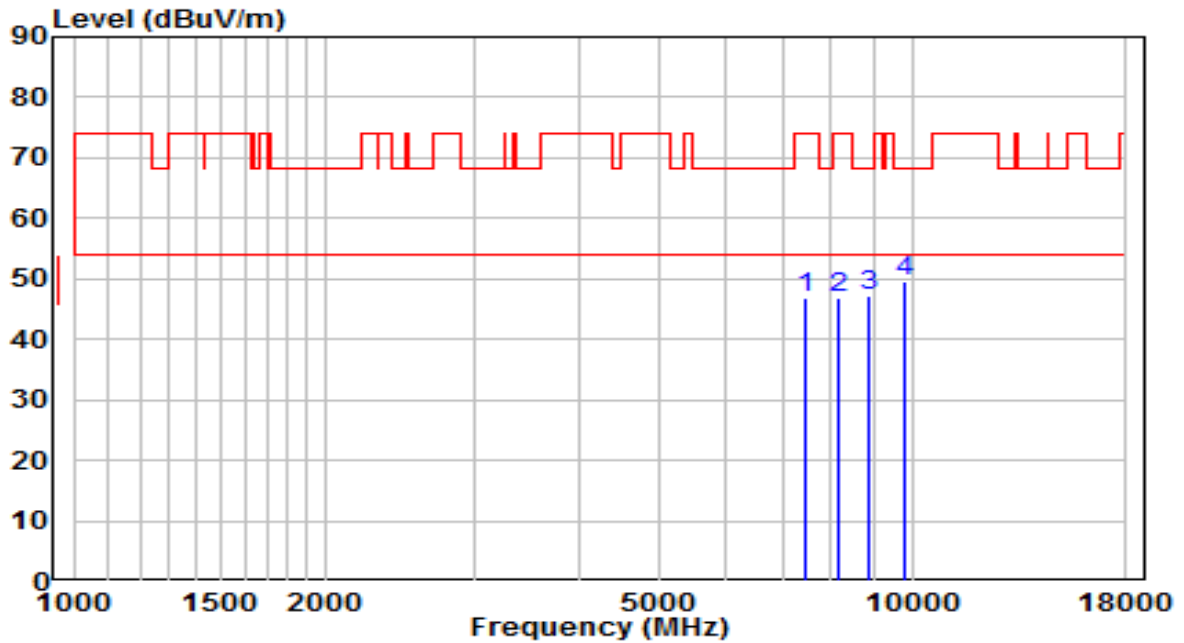


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7477.000	33.92	12.91	46.83	-27.17	74.00	Peak
2	8182.500	33.31	13.51	46.82	-27.18	74.00	Peak
3	8888.000	32.57	14.61	47.17	-21.03	68.20	Peak
4	* 9823.000	33.33	16.26	49.59	-18.61	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5550MHz	Test Voltage	By PoE

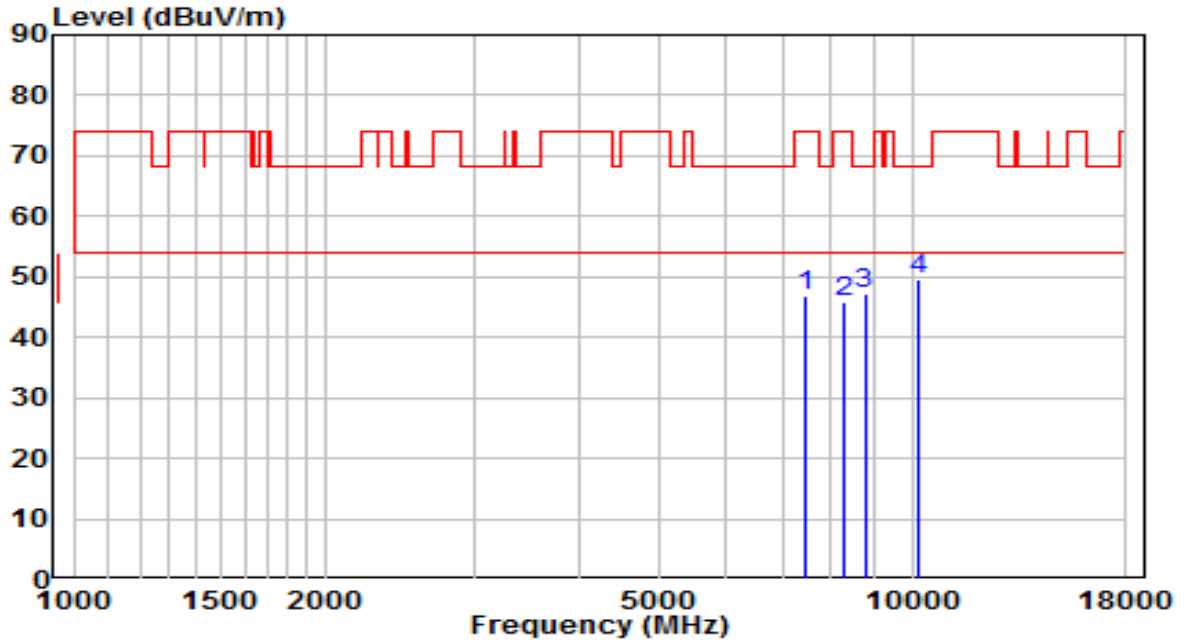


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7485.500	34.05	12.95	47.00	-27.00	74.00	Peak
2	8301.500	32.20	13.57	45.76	-28.24	74.00	Peak
3	8777.500	32.83	14.33	47.17	-21.03	68.20	Peak
4	* 10197.000	32.15	17.35	49.50	-18.70	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5670MHz	Test Voltage	By PoE

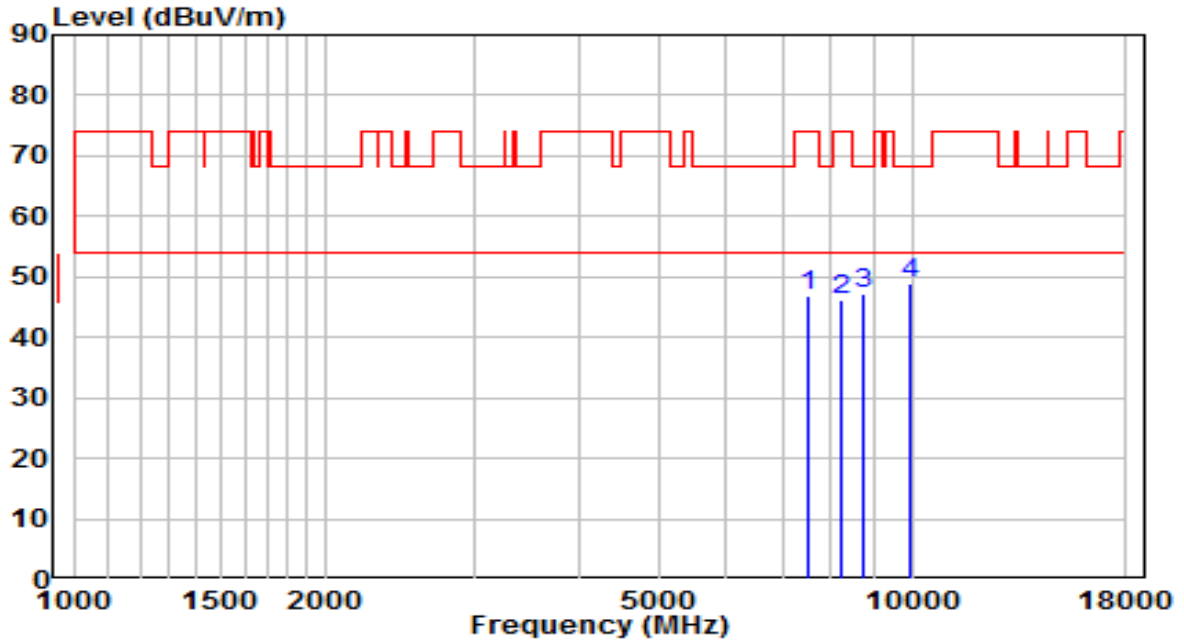


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7502.500	33.89	13.02	46.90	-27.10	74.00	Peak
2	8233.500	32.80	13.54	46.33	-27.67	74.00	Peak
3	8735.000	33.10	14.23	47.33	-20.87	68.20	Peak
4	* 9916.500	32.51	16.42	48.93	-19.27	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5670MHz	Test Voltage	By PoE

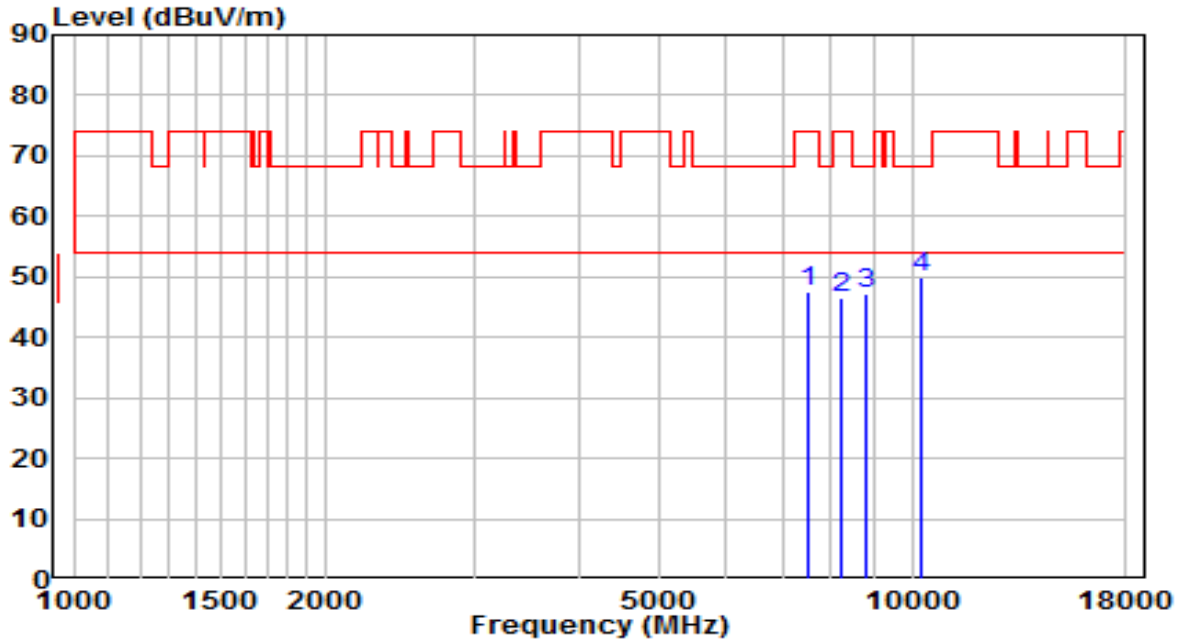


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7502.500	34.50	13.02	47.52	-26.48	74.00	Peak
2	8216.500	33.15	13.53	46.68	-27.32	74.00	Peak
3	8828.500	32.90	14.46	47.36	-20.84	68.20	Peak
4	* 10265.000	32.36	17.63	49.99	-18.21	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5710MHz	Test Voltage	By PoE

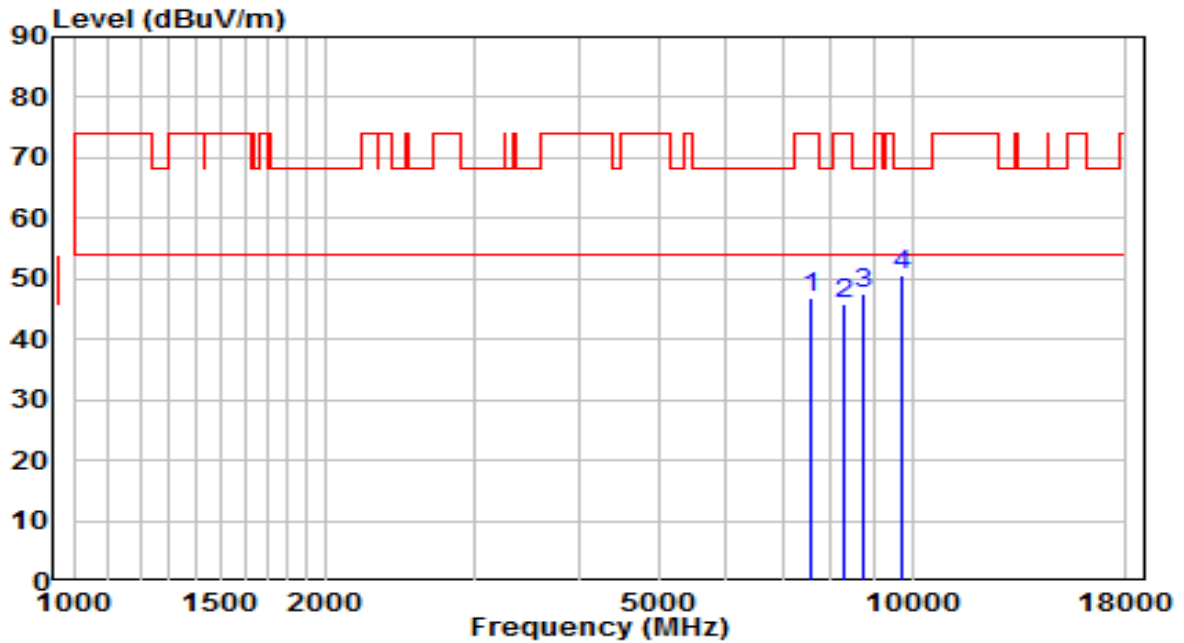


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7553.500	33.82	13.06	46.88	-27.12	74.00	Peak
2	8284.500	32.30	13.56	45.86	-28.14	74.00	Peak
3	8752.000	33.15	14.27	47.43	-20.77	68.20	Peak
4	* 9738.000	34.47	16.12	50.59	-17.61	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5710MHz	Test Voltage	By PoE

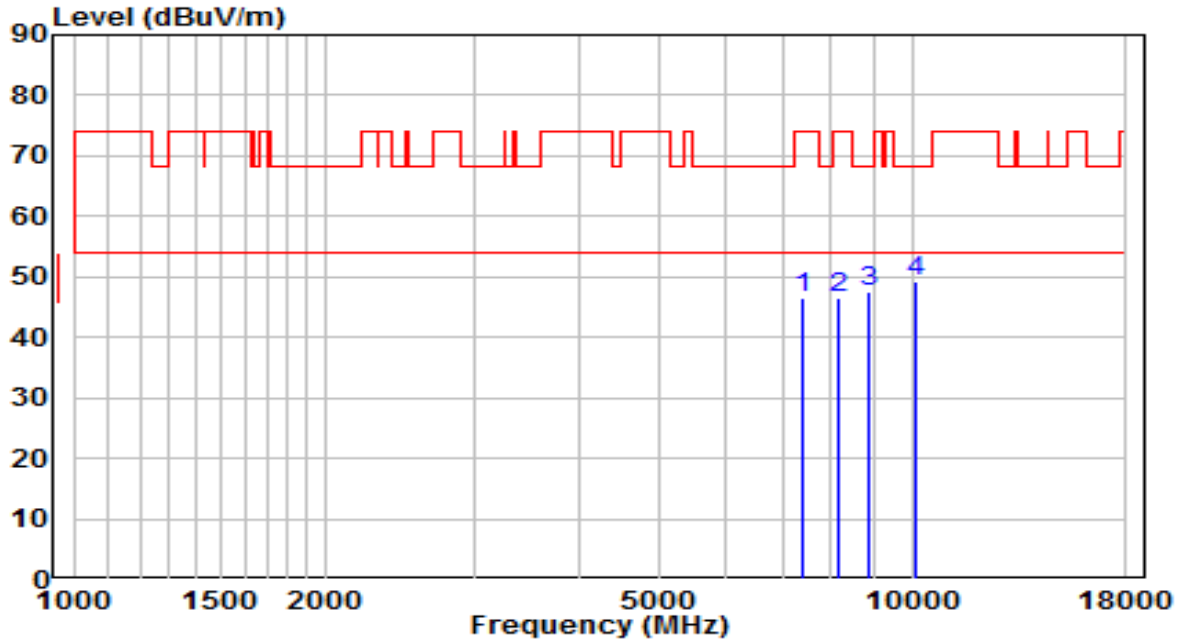


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7417.500	33.78	12.65	46.43	-27.57	74.00	Peak
2	8182.500	32.99	13.51	46.50	-27.50	74.00	Peak
3	8854.000	33.16	14.52	47.68	-20.52	68.20	Peak
4	* 10129.000	32.29	17.08	49.37	-18.83	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5755MHz	Test Voltage	By PoE

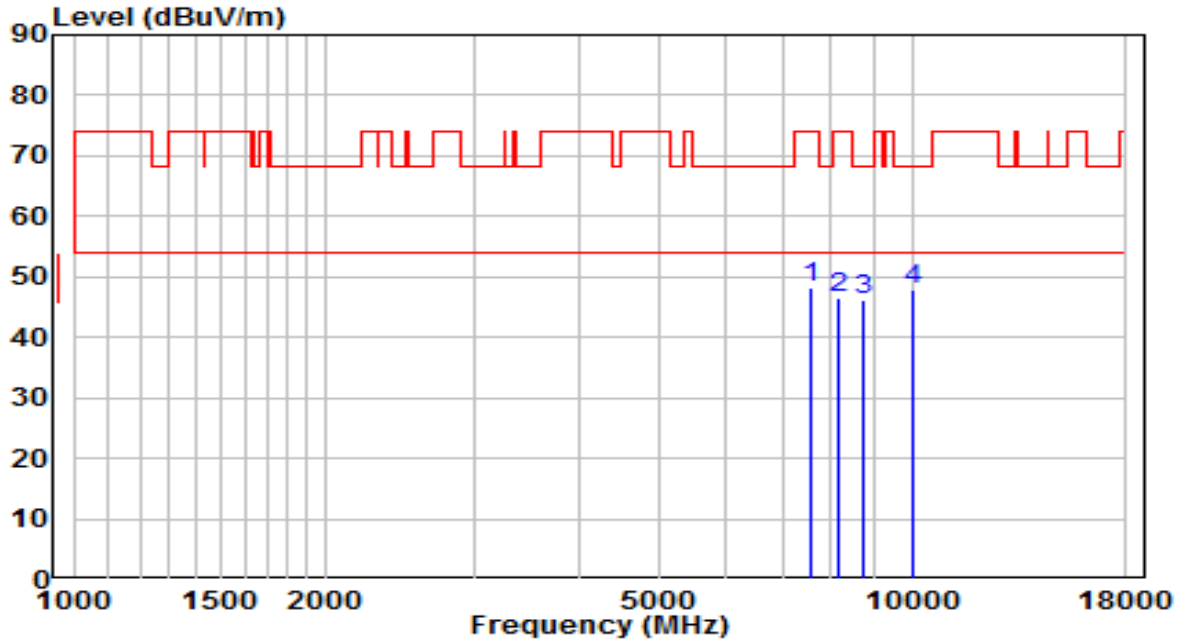


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7579.000	34.98	13.08	48.06	-25.94	74.00	Peak
2	8165.500	33.14	13.50	46.64	-27.36	74.00	Peak
3	8743.500	31.94	14.25	46.19	-22.01	68.20	Peak
4	* 10001.500	31.34	16.57	47.91	-20.29	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5755MHz	Test Voltage	By PoE

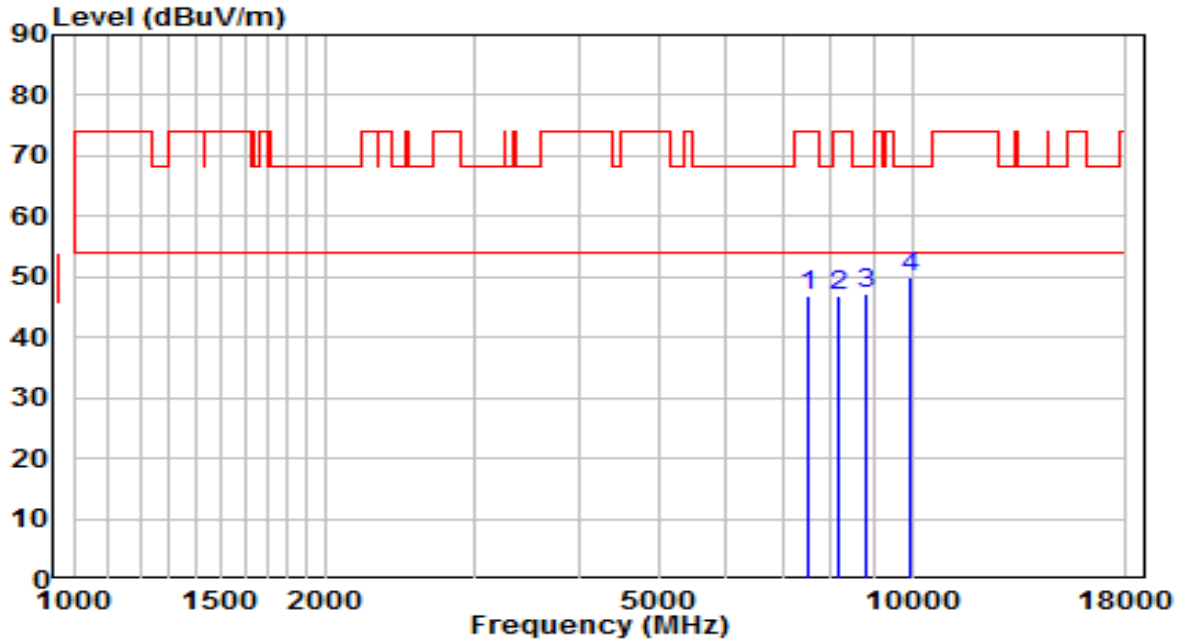


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7511.000	33.78	13.02	46.80	-27.20	74.00	Peak
2	8148.500	33.40	13.50	46.89	-27.11	74.00	Peak
3	8828.500	32.67	14.46	47.13	-21.07	68.20	Peak
4	* 9950.500	33.30	16.48	49.78	-18.42	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5795MHz	Test Voltage	By PoE

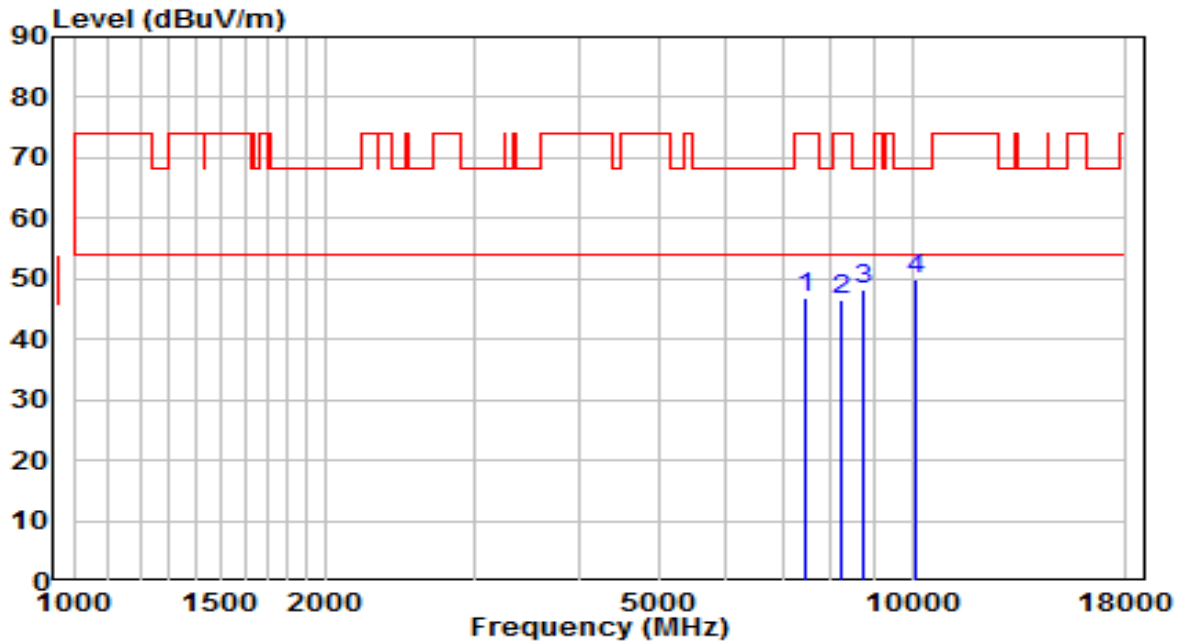


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7443.000	34.05	12.76	46.81	-27.19	74.00	Peak
2	8225.000	33.13	13.53	46.67	-27.33	74.00	Peak
3	8769.000	33.92	14.31	48.24	-19.96	68.20	Peak
4	* 10095.000	32.96	16.94	49.90	-18.30	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at channel 5795MHz	Test Voltage	By PoE

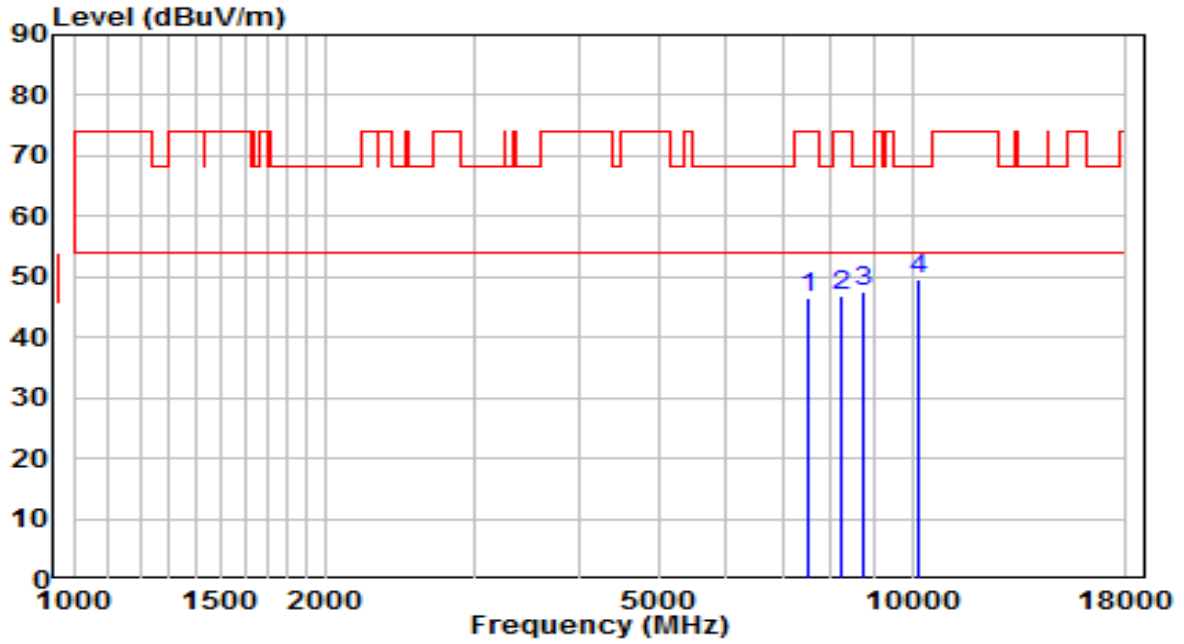


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7494.000	33.43	12.99	46.41	-27.59	74.00	Peak
2	8216.500	33.41	13.53	46.94	-27.06	74.00	Peak
3	8752.000	33.36	14.27	47.63	-20.57	68.20	Peak
4	* 10154.500	32.51	17.18	49.70	-18.50	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at channel 5210MHz	Test Voltage	By PoE

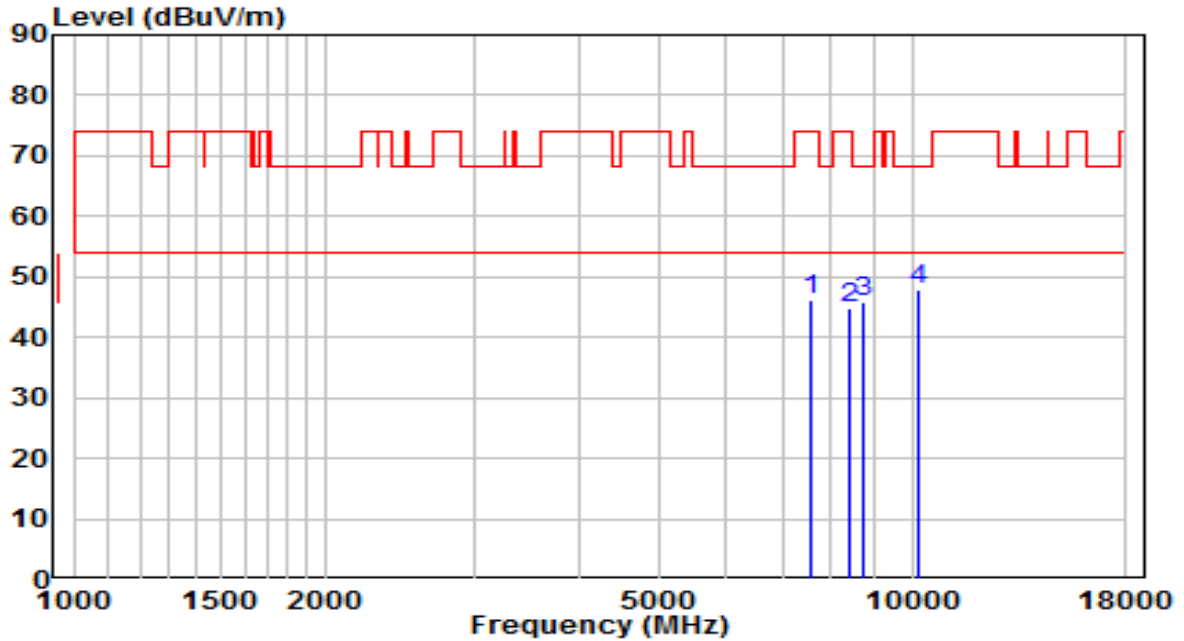


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7553.500	33.14	13.06	46.20	-27.80	74.00	Peak
2	8395.000	31.24	13.61	44.84	-29.16	74.00	Peak
3	8769.000	31.70	14.31	46.01	-22.19	68.20	Peak
4	* 10171.500	30.64	17.25	47.89	-20.31	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at channel 5210MHz	Test Voltage	By PoE

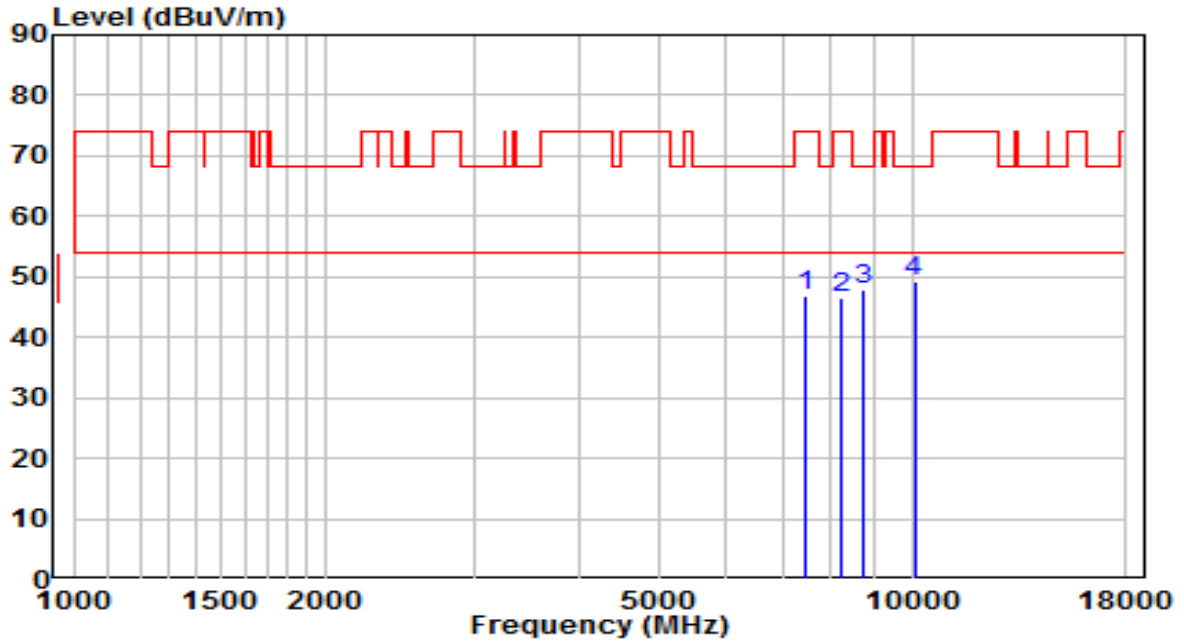


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7477.000	34.10	12.91	47.01	-26.99	74.00	Peak
2	8216.500	33.17	13.53	46.70	-27.30	74.00	Peak
3	8760.500	33.74	14.29	48.03	-20.17	68.20	Peak
4	* 10061.000	32.51	16.81	49.31	-18.89	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at channel 5290MHz	Test Voltage	By PoE

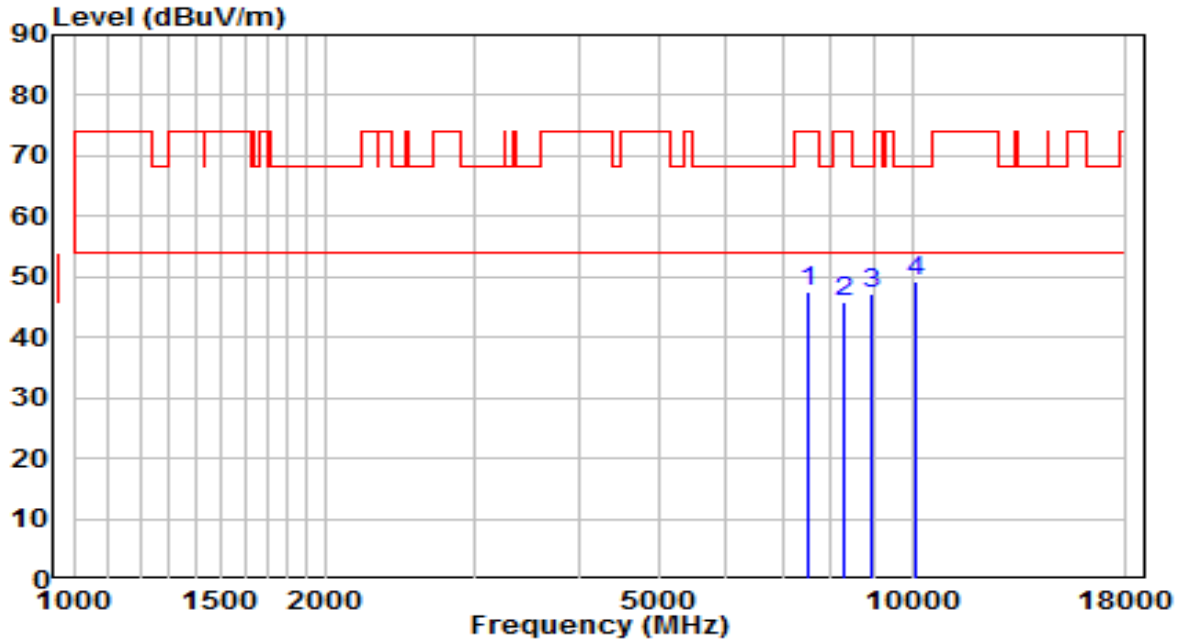


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7528.000	34.41	13.04	47.45	-26.55	74.00	Peak
2	8276.000	32.40	13.55	45.96	-28.04	74.00	Peak
3	8913.500	32.40	14.67	47.07	-21.13	68.20	Peak
4	* 10095.000	32.45	16.94	49.39	-18.81	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at channel 5290MHz	Test Voltage	By PoE

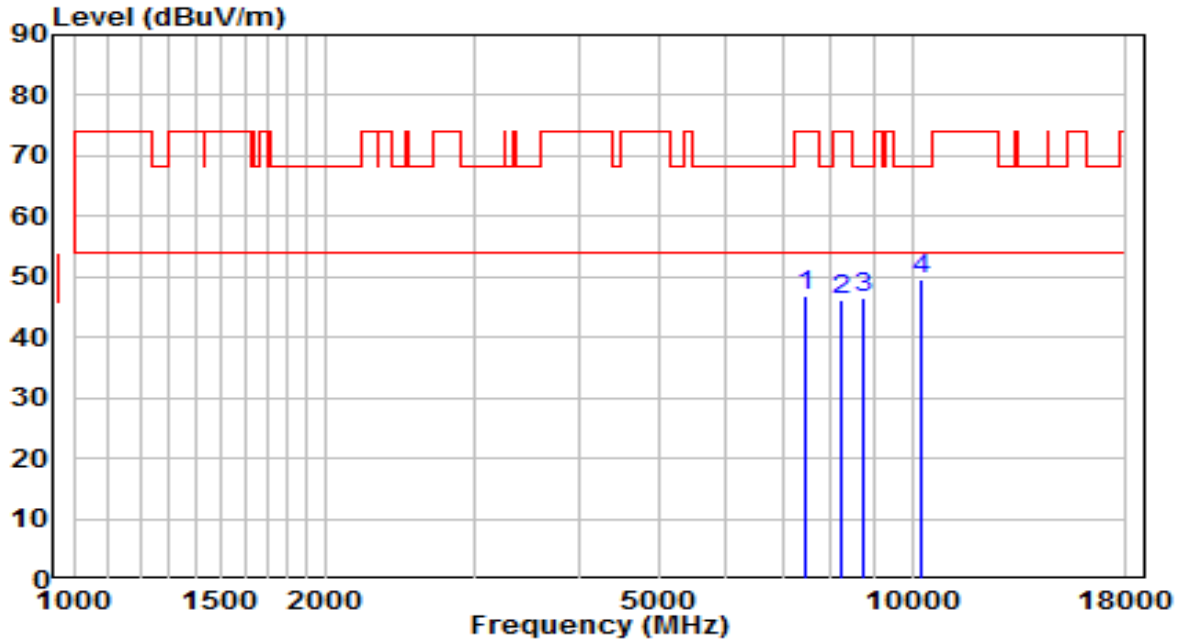


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7460.000	34.14	12.84	46.98	-27.02	74.00	Peak
2	8242.000	32.54	13.54	46.08	-27.92	74.00	Peak
3	8752.000	32.39	14.27	46.66	-21.54	68.20	Peak
4	* 10239.500	31.97	17.52	49.49	-18.71	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at channel 5530MHz	Test Voltage	By PoE

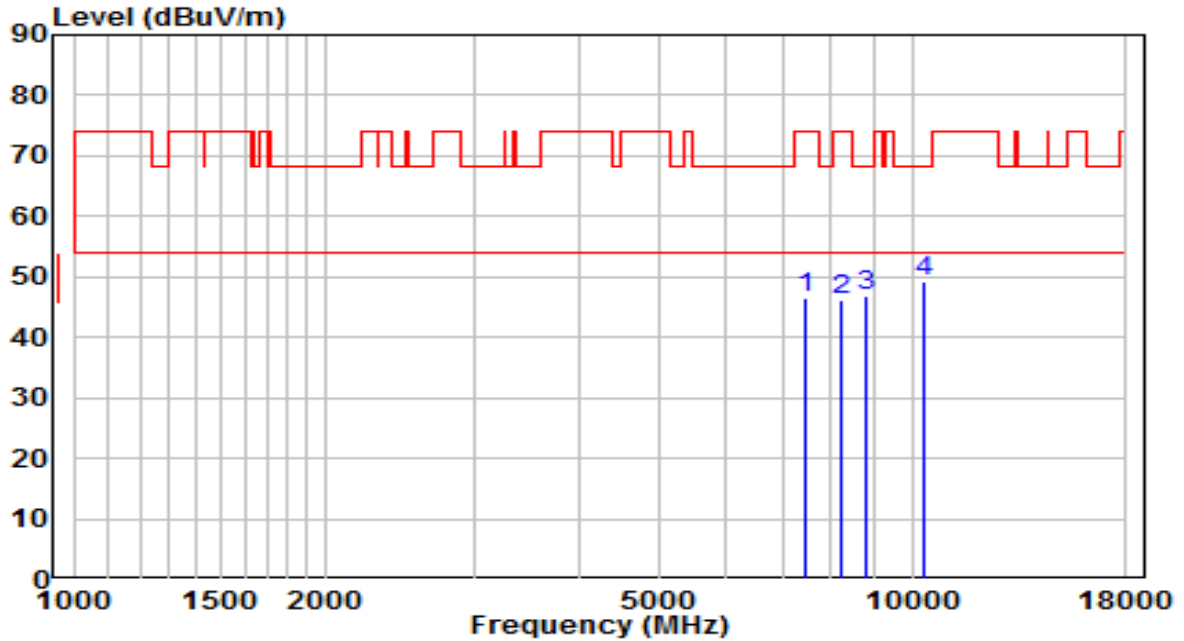


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7434.500	33.79	12.72	46.52	-27.48	74.00	Peak
2	8225.000	32.51	13.53	46.04	-27.96	74.00	Peak
3	8837.000	32.33	14.48	46.81	-21.39	68.20	Peak
4	* 10341.500	31.16	17.93	49.09	-19.11	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at channel 5530MHz	Test Voltage	By PoE

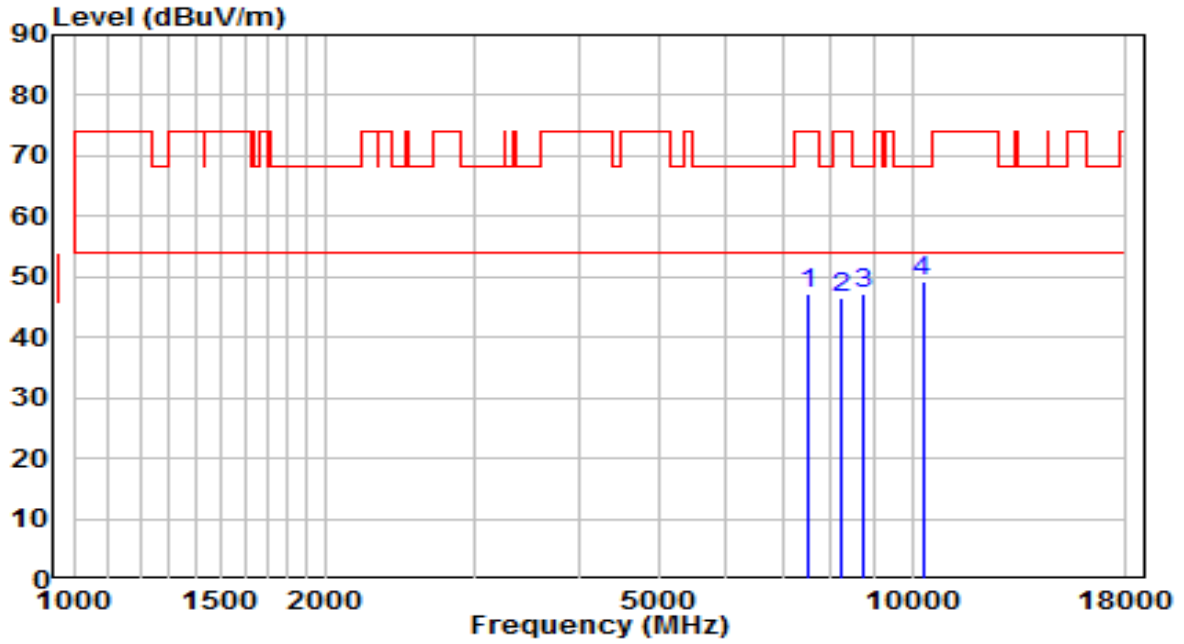


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7528.000	34.27	13.04	47.31	-26.69	74.00	Peak
2	8233.500	32.89	13.54	46.42	-27.58	74.00	Peak
3	8735.000	32.94	14.23	47.17	-21.03	68.20	Peak
4	* 10290.500	31.45	17.73	49.18	-19.02	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at channel 5610MHz	Test Voltage	By PoE

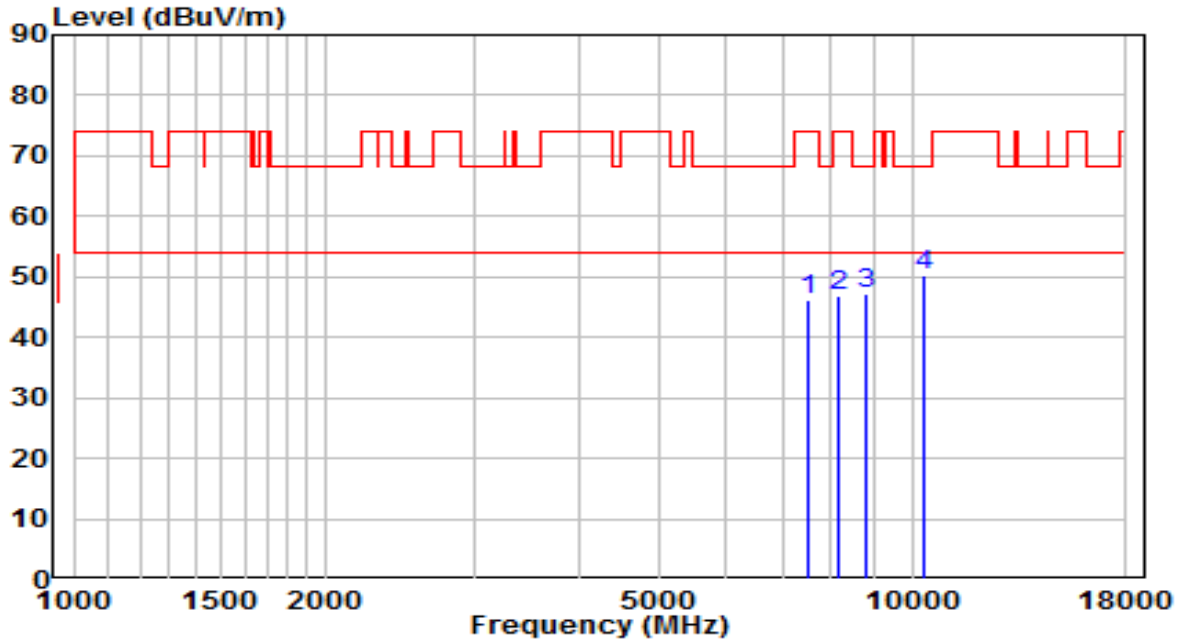


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7536.500	33.13	13.05	46.18	-27.82	74.00	Peak
2	8157.000	33.38	13.50	46.88	-27.12	74.00	Peak
3	8786.000	33.00	14.36	47.36	-20.84	68.20	Peak
4	* 10341.500	32.36	17.93	50.29	-17.91	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at channel 5610MHz	Test Voltage	By PoE

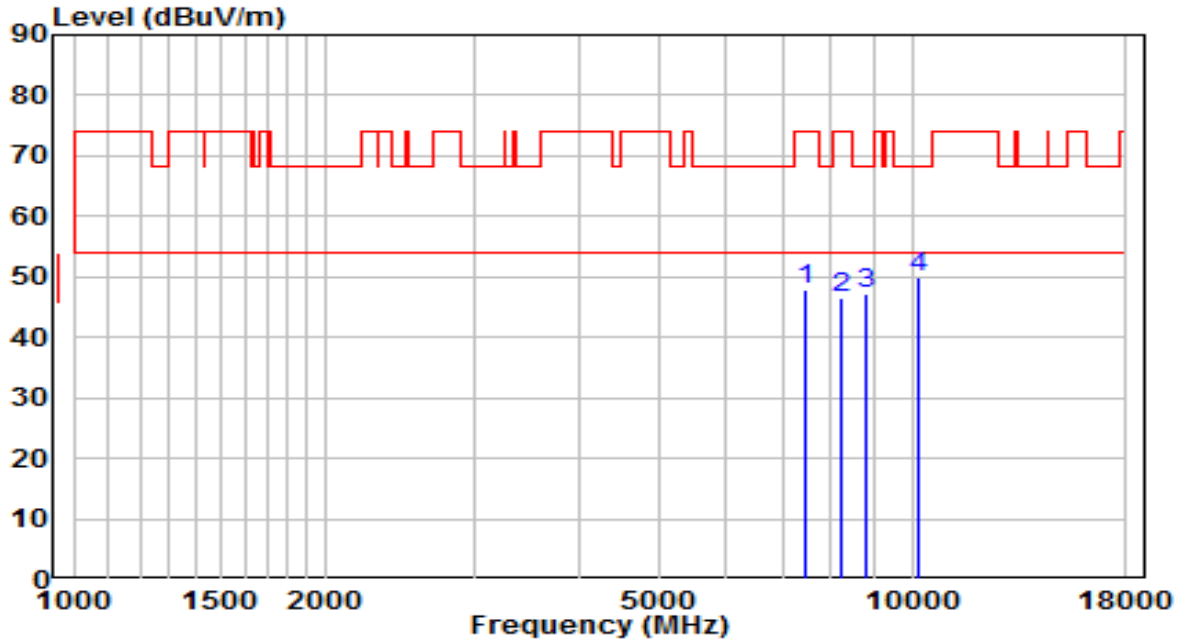


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7434.500	35.09	12.72	47.82	-26.18	74.00	Peak
2	8225.000	33.00	13.53	46.54	-27.46	74.00	Peak
3	8828.500	32.77	14.46	47.23	-20.97	68.20	Peak
4	* 10146.000	32.76	17.15	49.91	-18.29	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at channel 5690MHz	Test Voltage	By PoE

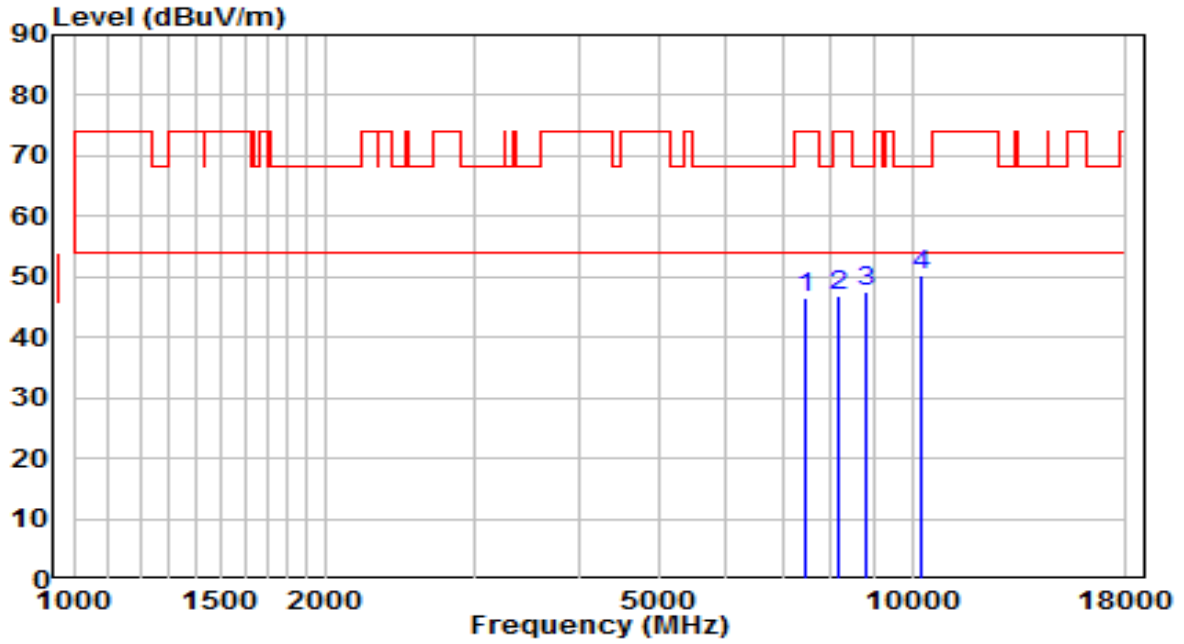


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7477.000	33.63	12.91	46.54	-27.46	74.00	Peak
2	8148.500	33.48	13.50	46.98	-27.02	74.00	Peak
3	8828.500	32.99	14.46	47.45	-20.75	68.20	Peak
4	* 10256.500	32.64	17.59	50.23	-17.97	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at channel 5690MHz	Test Voltage	By PoE

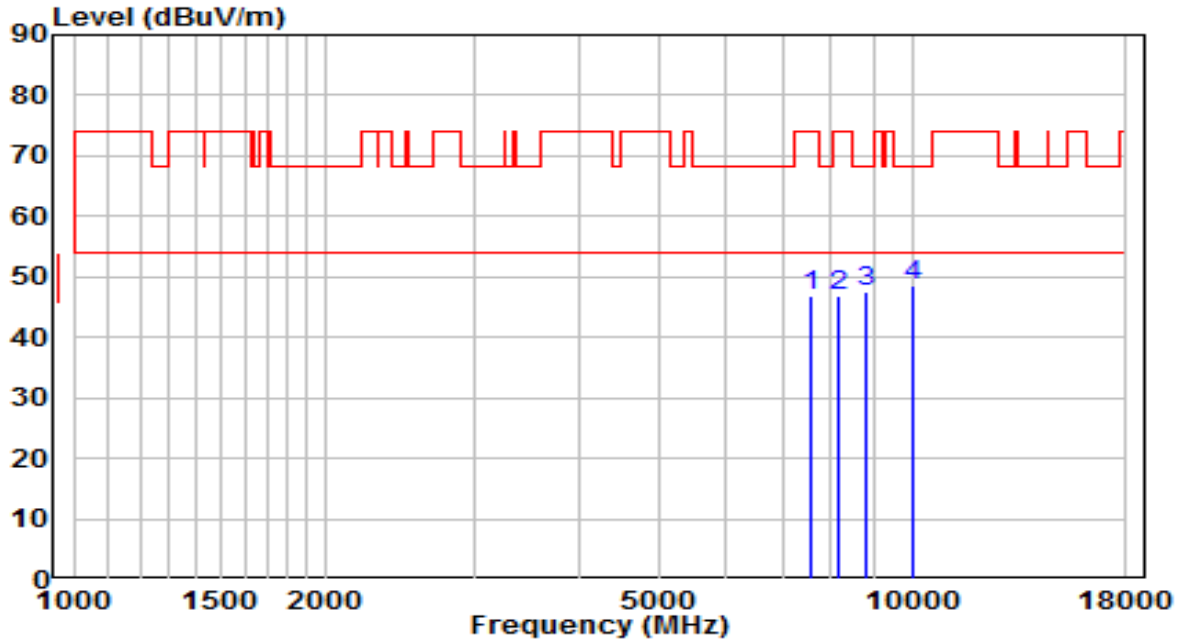


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7562.000	33.82	13.07	46.89	-27.11	74.00	Peak
2	8182.500	33.48	13.51	46.99	-27.01	74.00	Peak
3	8820.000	33.07	14.44	47.51	-20.69	68.20	Peak
4	* 10035.500	31.99	16.70	48.69	-19.51	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at channel 5775MHz	Test Voltage	By PoE

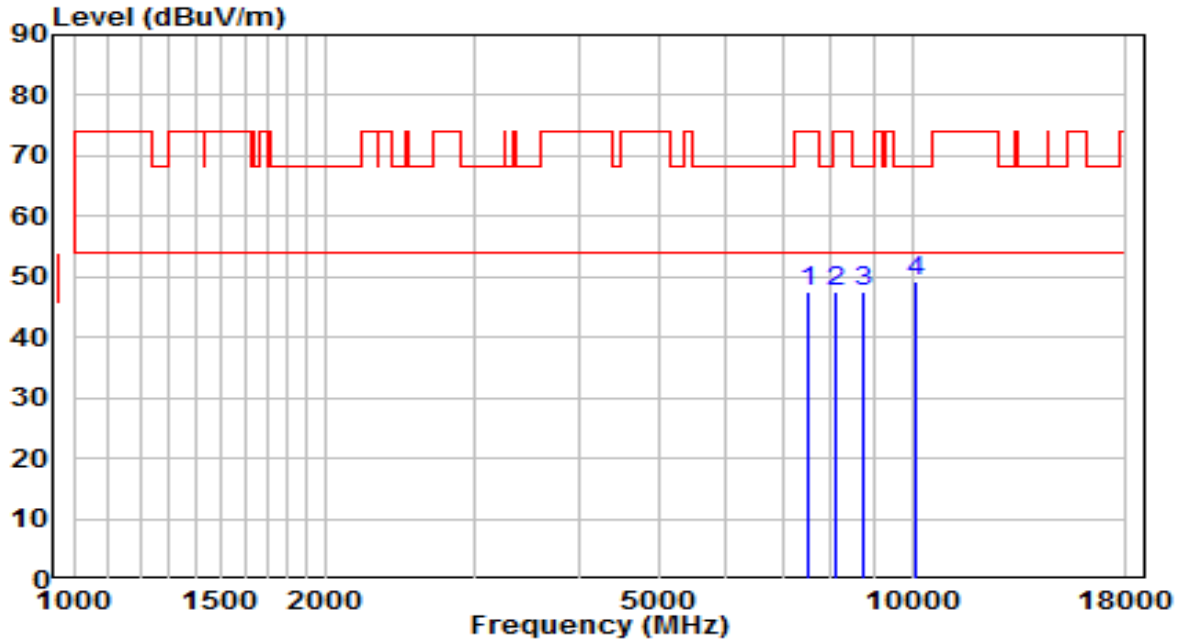


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7536.500	34.42	13.05	47.47	-26.53	74.00	Peak
2	8131.500	33.99	13.49	47.48	-26.52	74.00	Peak
3	8769.000	33.12	14.31	47.43	-20.77	68.20	Peak
4	* 10103.500	32.35	16.98	49.32	-18.88	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-27
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at channel 5775MHz	Test Voltage	By PoE

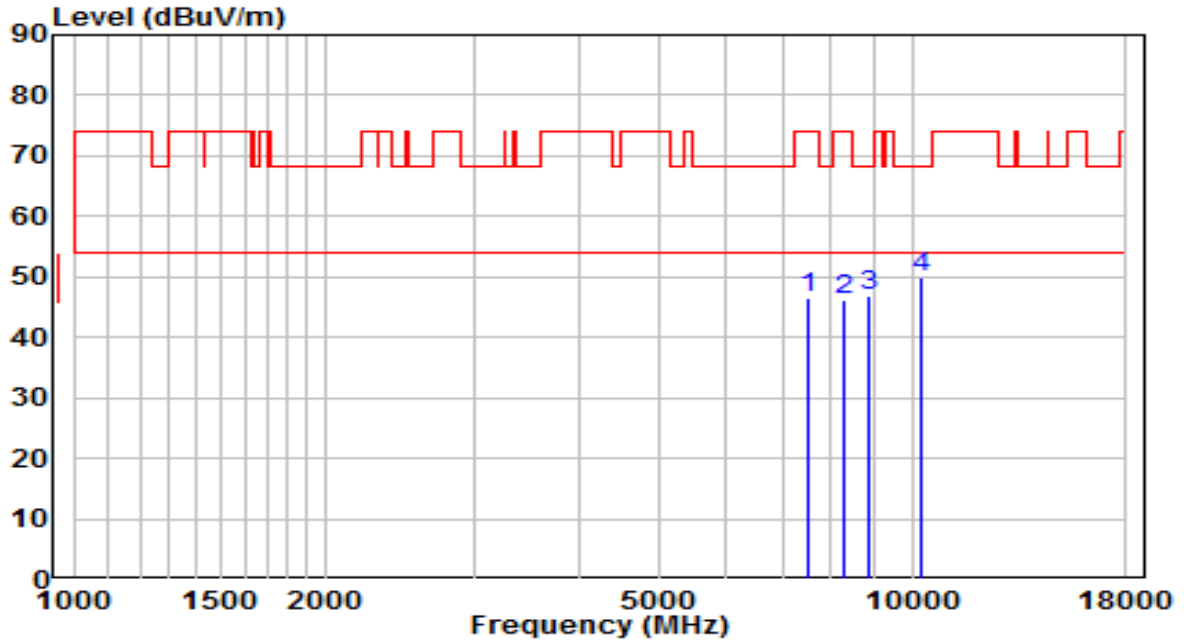


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7511.000	33.59	13.02	46.62	-27.38	74.00	Peak
2	8284.500	32.78	13.56	46.34	-27.66	74.00	Peak
3	8854.000	32.29	14.52	46.81	-21.39	68.20	Peak
4	* 10265.000	32.21	17.63	49.83	-18.37	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80+80 at channel 5210+5290MHz	Test Voltage	By PoE

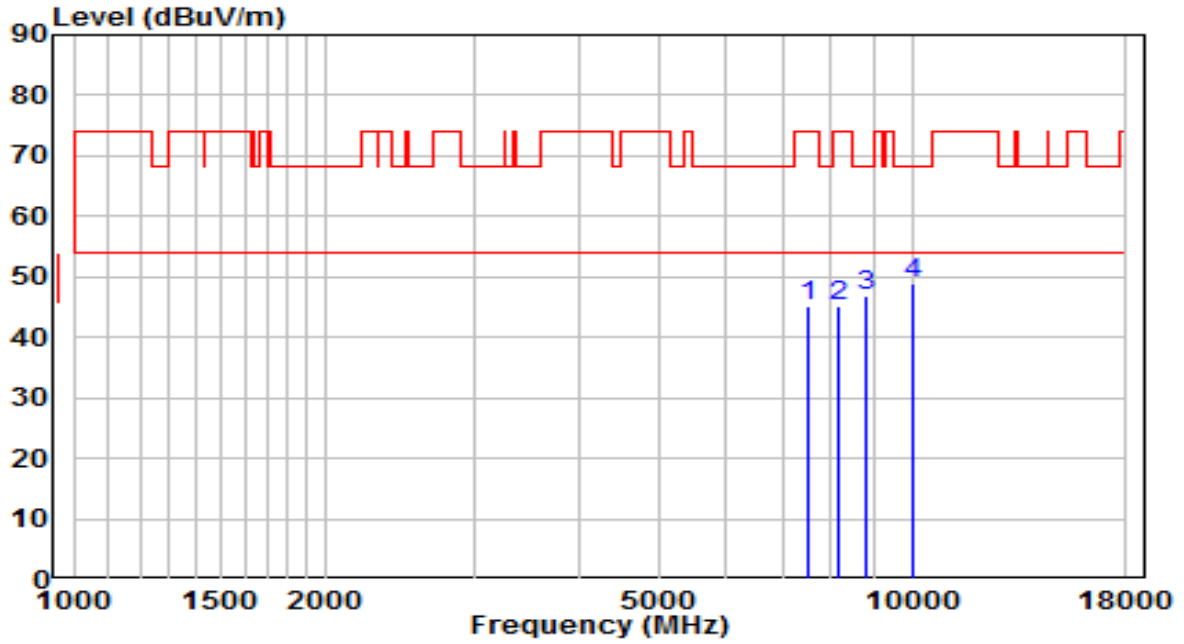


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7528.000	32.06	13.04	45.10	-28.90	74.00	Peak
2	8182.500	31.50	13.51	45.01	-28.99	74.00	Peak
3	8794.500	32.36	14.38	46.74	-21.46	68.20	Peak
4	* 10052.500	31.97	16.77	48.74	-19.46	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80+80 at channel 5210+5290MHz	Test Voltage	By PoE

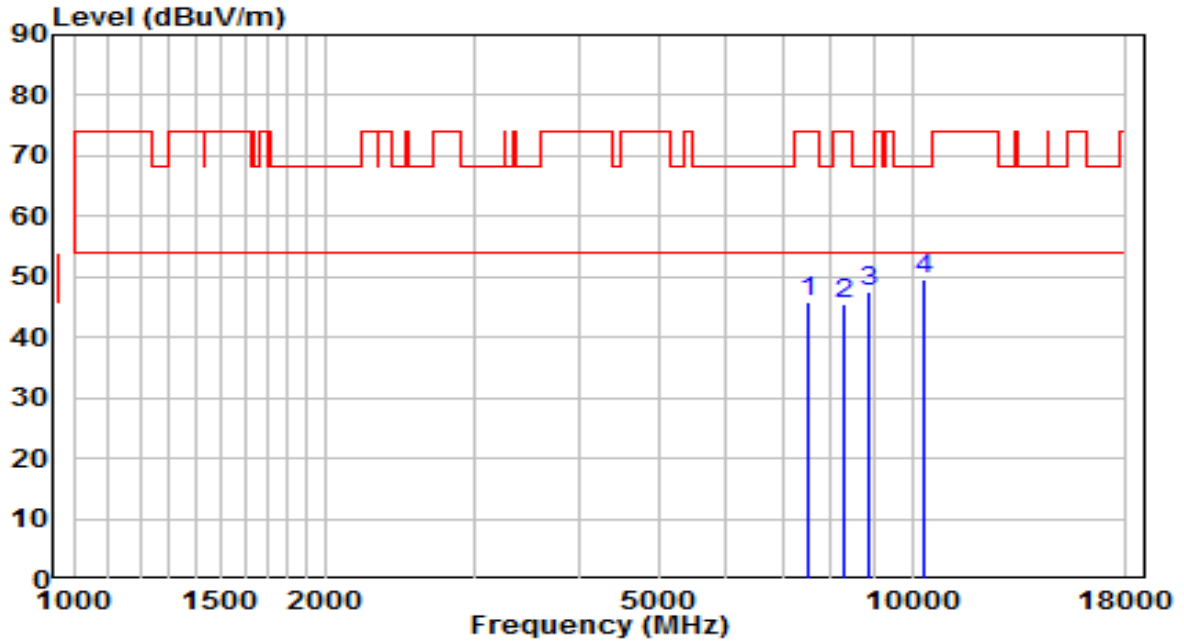


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7536.500	32.72	13.05	45.76	-28.24	74.00	Peak
2	8284.500	31.99	13.56	45.55	-28.45	74.00	Peak
3	8905.000	32.74	14.65	47.39	-20.81	68.20	Peak
4	* 10367.000	31.60	18.04	49.64	-18.56	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80+80 at channel 5530+5610MHz	Test Voltage	By PoE

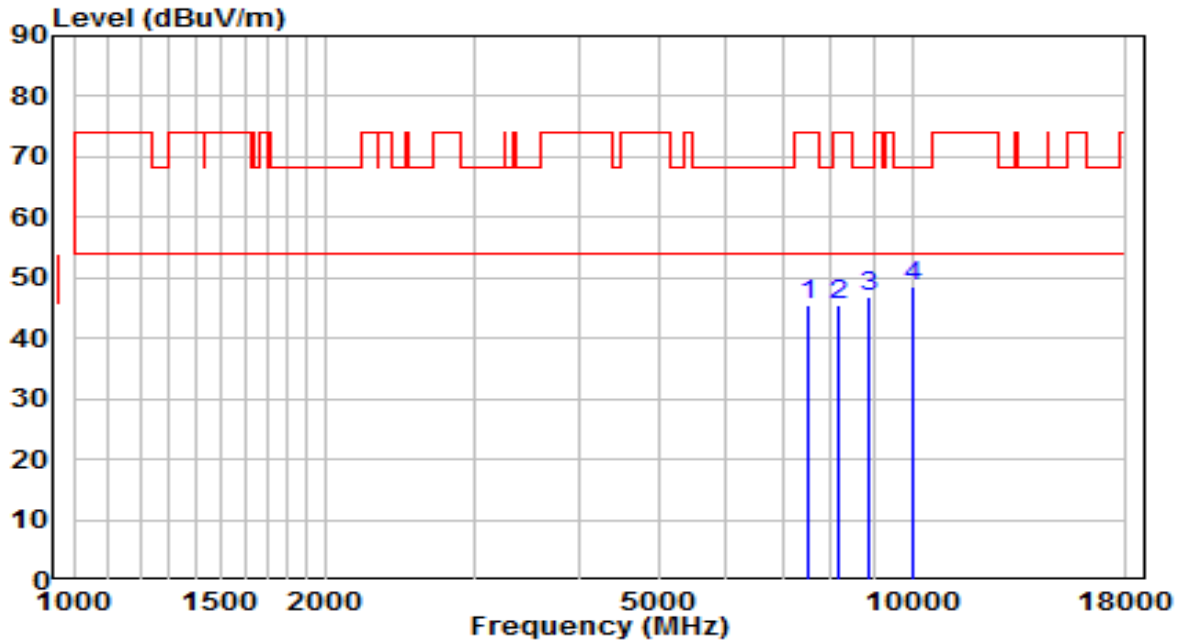


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7502.500	32.43	13.02	45.45	-28.55	74.00	Peak
2	8157.000	32.04	13.50	45.54	-28.46	74.00	Peak
3	8854.000	32.19	14.52	46.71	-21.49	68.20	Peak
4	* 10027.000	31.74	16.67	48.41	-19.79	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.2°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80+80 at channel 5530+5610MHz	Test Voltage	By PoE

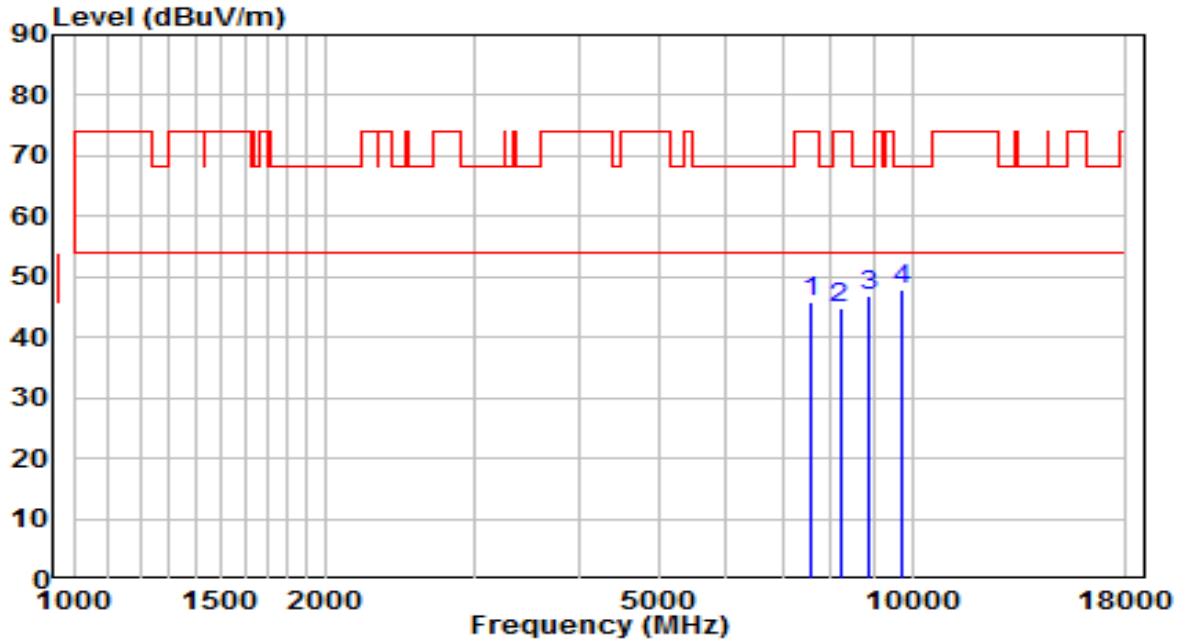


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	7562.000	32.68	13.07	45.75	-28.25	74.00	Peak
2	8199.500	31.44	13.52	44.96	-29.04	74.00	Peak
3	8854.000	32.51	14.52	47.03	-21.17	68.20	Peak
4	* 9746.500	31.70	16.13	47.83	-20.37	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

The Result of Radiated Spurious Emission below 1GHz:

EUT	ACCESS POINT (APEX0585)	Date of Test	2021-11-03
Factor	VULB 9162 (30MHz~8GHz) + 6dB Attenuator_2020	Temp. / Humidity	25.1°C /43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	By PoE

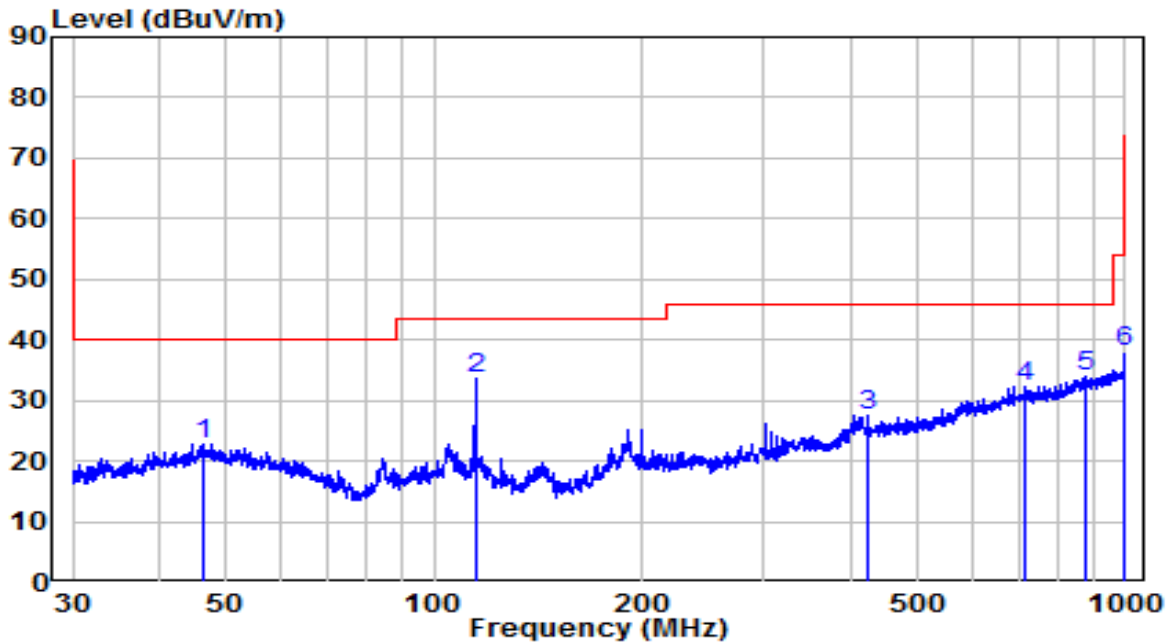


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	46.422	1.66	21.26	22.91	-17.09	40.00	Peak
2	* 114.716	16.64	16.99	33.64	-9.86	43.50	Peak
3	424.284	4.98	22.44	27.42	-18.58	46.00	Peak
4	716.682	5.33	26.93	32.26	-13.74	46.00	Peak
5	875.247	5.27	28.70	33.97	-12.03	46.00	Peak
6	1000.000	8.14	29.80	37.94	-16.06	54.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT (APEX0585)	Date of Test	2021-11-03
Factor	VULB 9162 (30MHz~8GHz) + 6dB Attenuator_2020	Temp. / Humidity	25.1°C /43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	By PoE

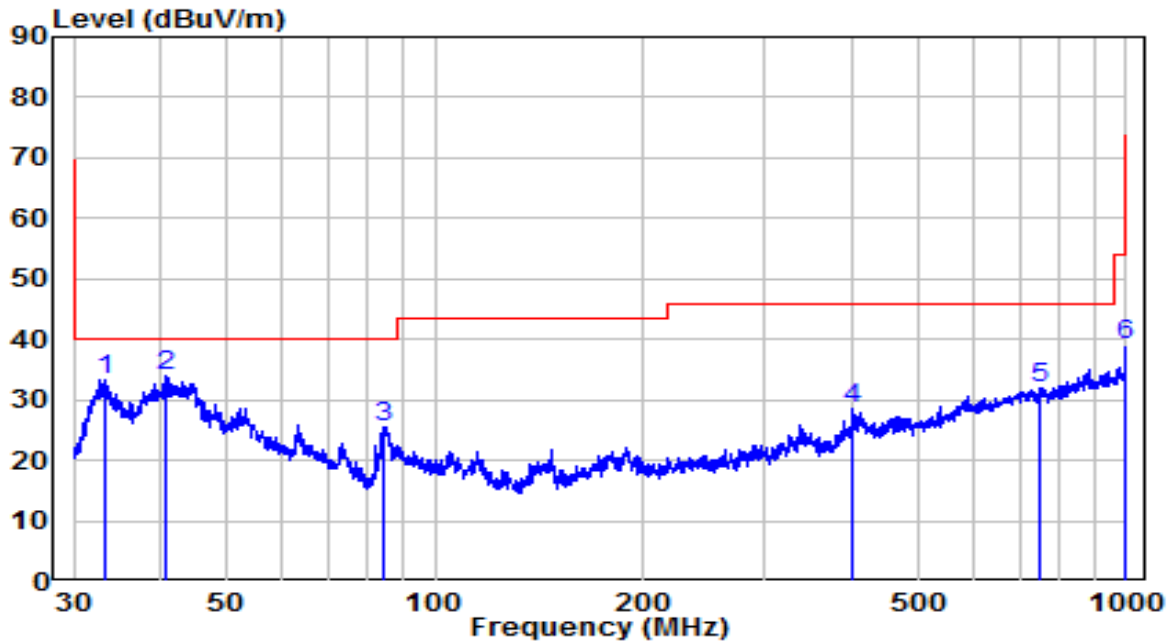


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	33.328	14.73	18.50	33.23	-6.77	40.00	Peak
2	* 40.702	13.42	20.60	34.01	-5.99	40.00	Peak
3	84.554	10.95	14.64	25.59	-14.41	40.00	Peak
4	401.839	6.30	22.13	28.43	-17.57	46.00	Peak
5	748.794	4.48	27.38	31.86	-14.14	46.00	Peak
6	1000.000	9.14	29.80	38.94	-15.06	54.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT (APEX0587)	Date of Test	2021-11-03
Factor	VULB 9162 (30MHz~8GHz) + 6dB Attenuator_2020	Temp. / Humidity	25.1°C /43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	By PoE

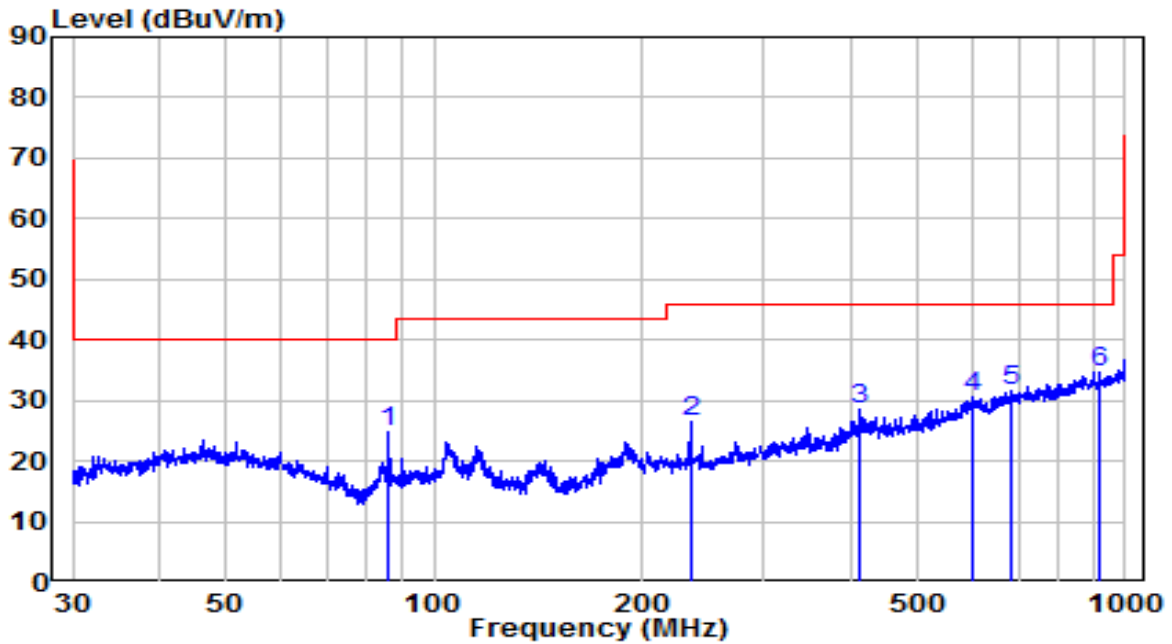


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	86.049	9.79	15.01	24.81	-15.19	40.00	Peak
2	235.403	8.08	18.47	26.56	-19.44	46.00	Peak
3	412.547	6.14	22.28	28.42	-17.58	46.00	Peak
4	600.373	5.23	25.41	30.63	-15.37	46.00	Peak
5	682.348	5.17	26.49	31.66	-14.34	46.00	Peak
6	* 916.069	5.90	28.90	34.80	-11.20	46.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT (APEX0587)	Date of Test	2021-11-03
Factor	VULB 9162 (30MHz~8GHz) + 6dB Attenuator_2020	Temp. / Humidity	25.1°C /43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	By PoE

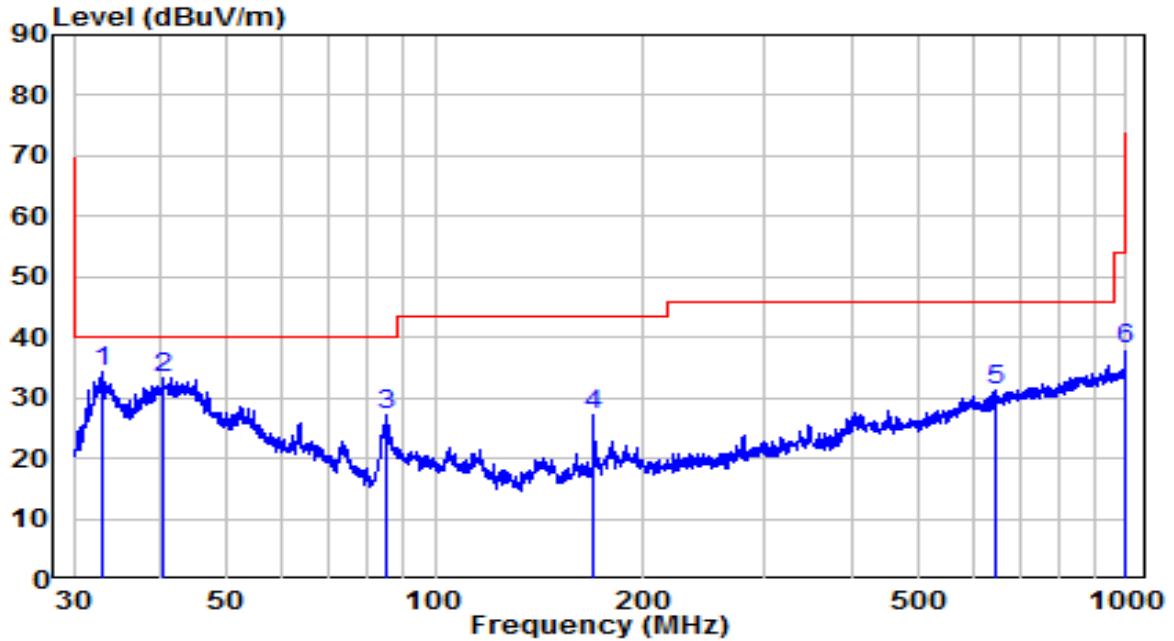


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)	
1	*	32.979	15.96	18.44	34.40	-5.60	40.00	Peak
2		40.346	12.72	20.55	33.27	-6.73	40.00	Peak
3		85.298	12.37	14.82	27.19	-12.81	40.00	Peak
4		169.897	11.88	15.40	27.28	-16.22	43.50	Peak
5		648.522	5.29	26.08	31.37	-14.63	46.00	Peak
6		1000.000	8.18	29.80	37.98	-16.02	54.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT (APEX0584)	Date of Test	2021-11-03
Factor	VULB 9162 (30MHz~8GHz) + 6dB Attenuator_2020	Temp. / Humidity	25.1°C /43%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	By PoE

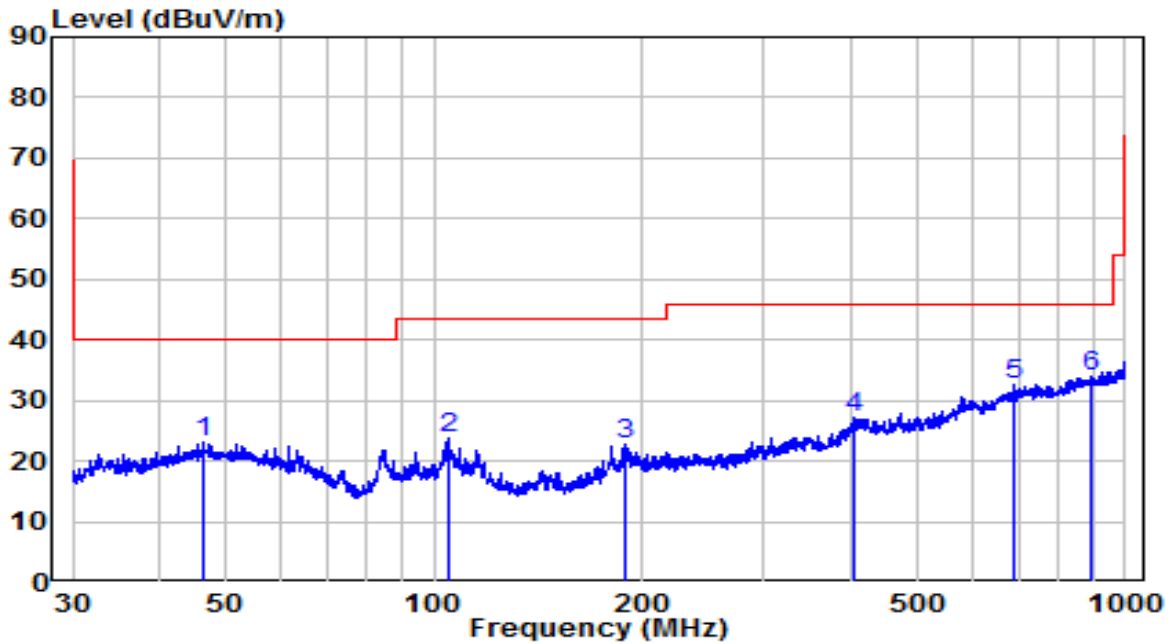


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	46.259	1.75	21.25	23.00	-17.00	40.00	Peak
2	104.903	5.83	17.95	23.78	-19.72	43.50	Peak
3	188.743	5.35	17.41	22.77	-20.73	43.50	Peak
4	403.958	5.03	22.16	27.18	-18.82	46.00	Peak
5	689.565	5.89	26.57	32.47	-13.53	46.00	Peak
6	* 889.168	5.07	28.76	33.82	-12.18	46.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT (APEX0584)	Date of Test	2021-11-03
Factor	VULB 9162 (30MHz~8GHz) + 6dB Attenuator_2020	Temp. / Humidity	25.1°C /43%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	By PoE

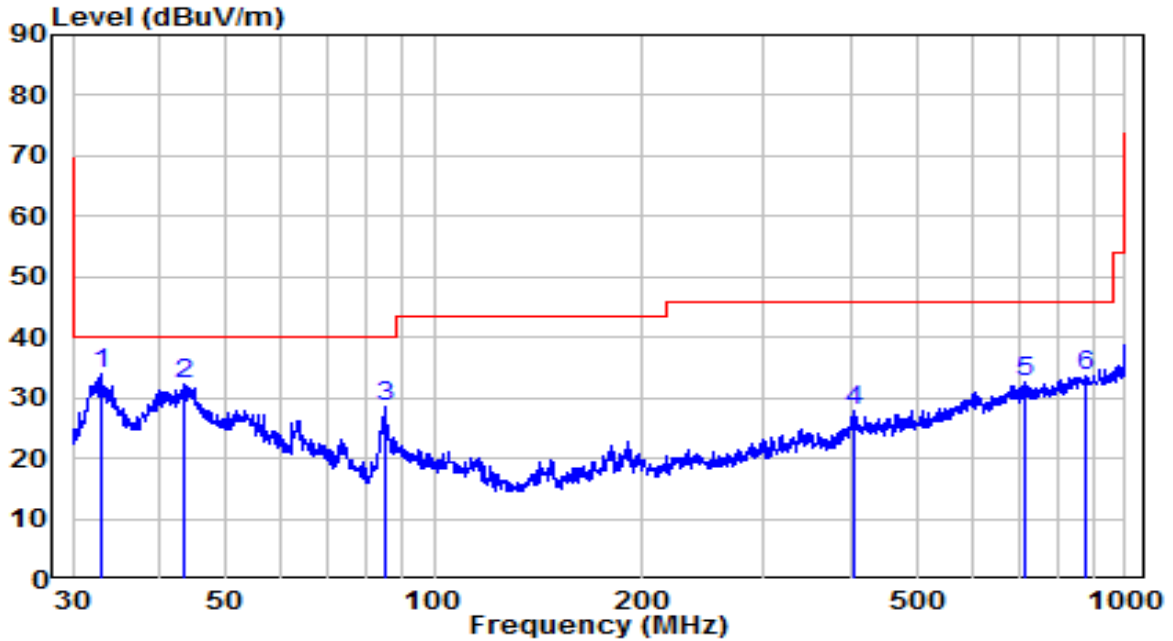

No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)	
1	*	32.979	15.64	18.44	34.07	-5.93	40.00	Peak
2		43.353	11.31	20.97	32.28	-7.72	40.00	Peak
3		84.702	13.99	14.68	28.67	-11.33	40.00	Peak
4		404.667	5.65	22.17	27.81	-18.19	46.00	Peak
5		719.200	5.52	26.97	32.49	-13.51	46.00	Peak
6		875.247	4.91	28.70	33.61	-12.39	46.00	Peak


Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

The Worst Case Result of Radiated Spurious Emission above 18GHz:

APEX0584

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	BBHA 9170 (15GHz~40GHz)_2021	Temp. / Humidity	21.6°C/22%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	120V/60Hz

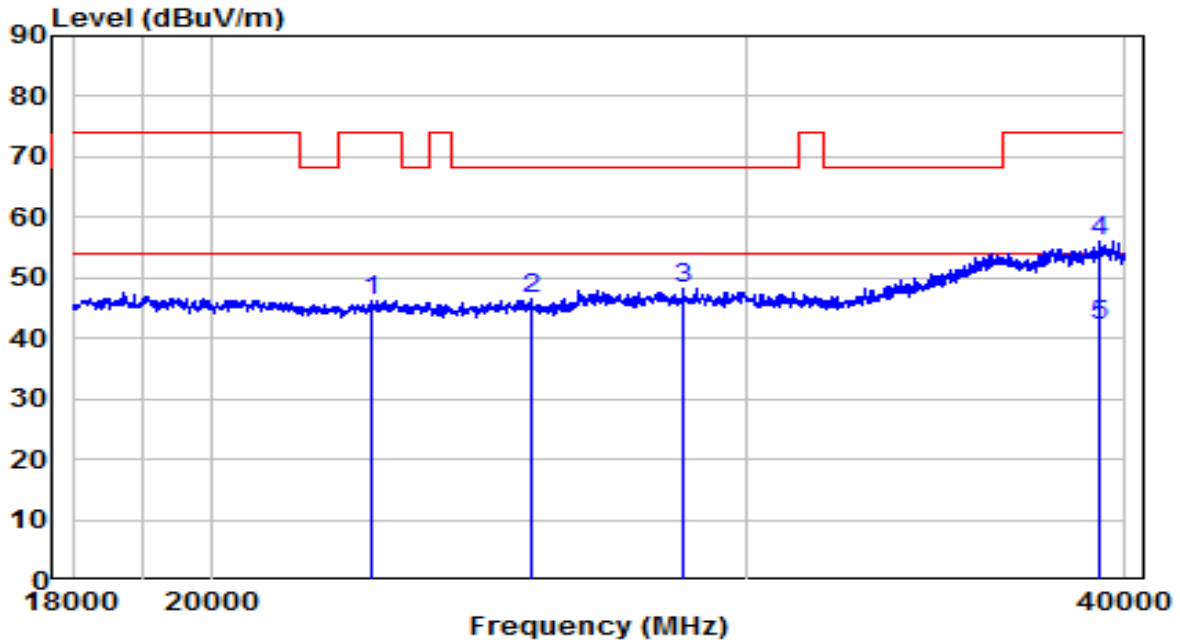


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	22576.000	42.48	3.85	46.33	-27.67	74.00	Peak
2	25491.000	42.70	3.90	46.60	-21.60	68.20	Peak
3	28615.000	43.67	4.65	48.32	-19.88	68.20	Peak
4	39219.000	43.69	12.28	55.97	-18.03	74.00	Peak
5	* 39219.000	29.74	12.28	42.02	-11.98	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	BBHA 9170 (15GHz~40GHz)_2021	Temp. / Humidity	21.6°C/22%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	120V/60Hz

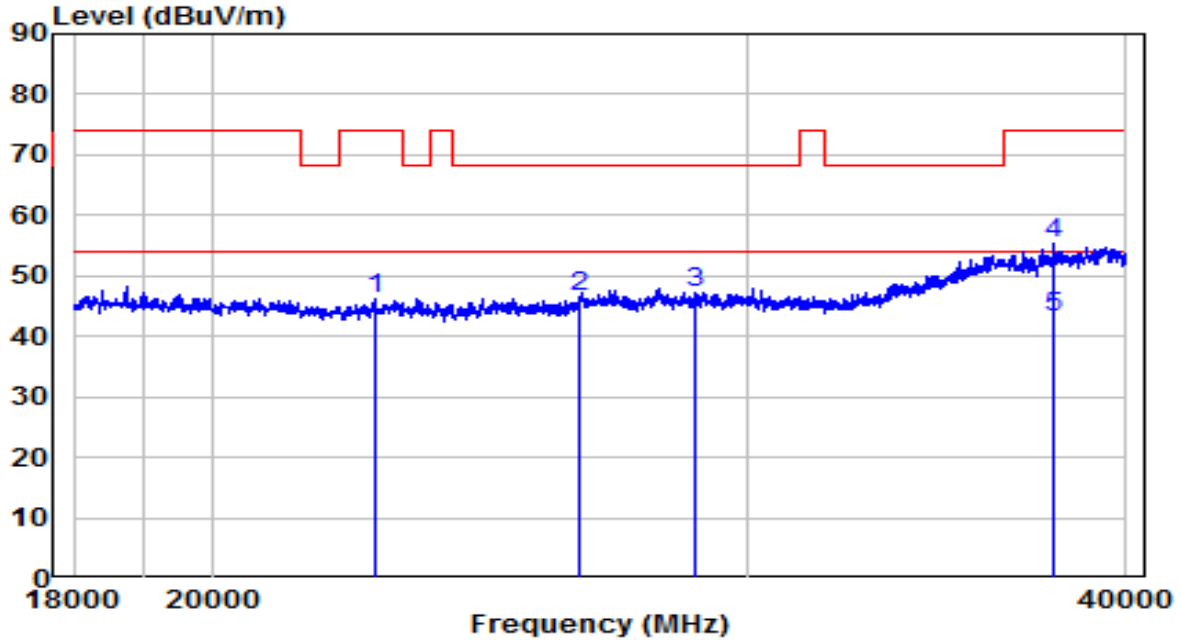


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	22609.000	42.40	3.87	46.26	-27.74	74.00	Peak
2	26437.000	42.50	4.07	46.58	-21.62	68.20	Peak
3	28868.000	42.55	4.75	47.30	-20.90	68.20	Peak
4	37833.000	44.24	11.03	55.28	-18.72	74.00	Peak
5	* 37833.000	32.02	11.03	43.05	-10.95	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

APEX0587

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	BBHA 9170 (15GHz~40GHz)_2021	Temp. / Humidity	21.6°C/22%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	120V/60Hz

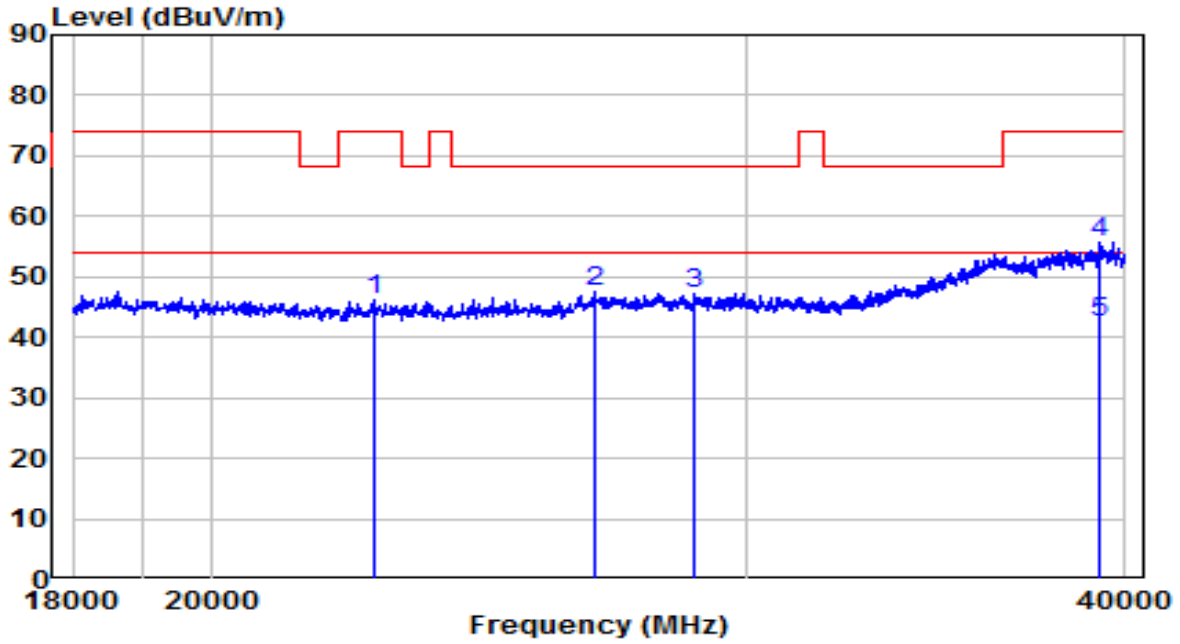


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	22642.000	42.24	3.89	46.13	-27.87	74.00	Peak
2	26734.000	43.20	4.19	47.39	-20.81	68.20	Peak
3	28835.000	42.36	4.73	47.10	-21.10	68.20	Peak
4	39197.000	43.46	12.26	55.72	-18.28	74.00	Peak
5	* 39197.000	30.36	12.26	42.62	-11.38	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	BBHA 9170 (15GHz~40GHz)_2021	Temp. / Humidity	21.6°C/22%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	120V/60Hz

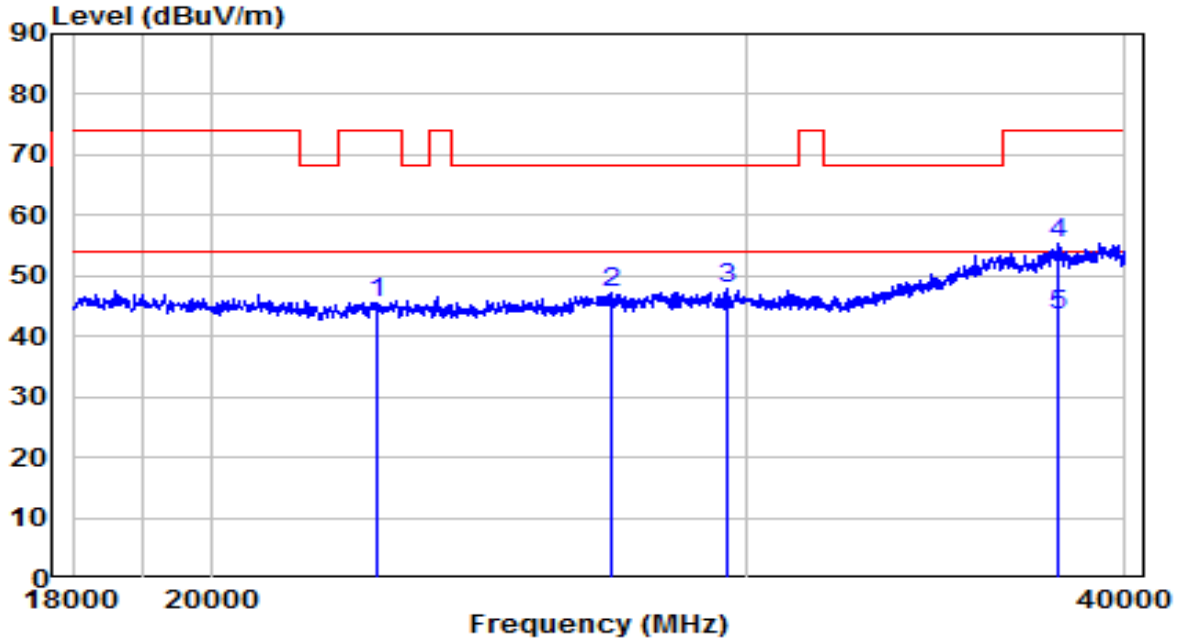


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	22686.000	41.73	3.91	45.64	-28.36	74.00	Peak
2	27064.000	43.00	4.29	47.29	-20.91	68.20	Peak
3	29561.000	42.54	5.39	47.92	-20.28	68.20	Peak
4	38042.000	44.33	11.00	55.33	-18.67	74.00	Peak
5	* 38042.000	32.50	11.00	43.50	-10.50	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

APEX0585

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	BBHA 9170 (15GHz~40GHz)_2021	Temp. / Humidity	21.6°C/22%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	120V/60Hz

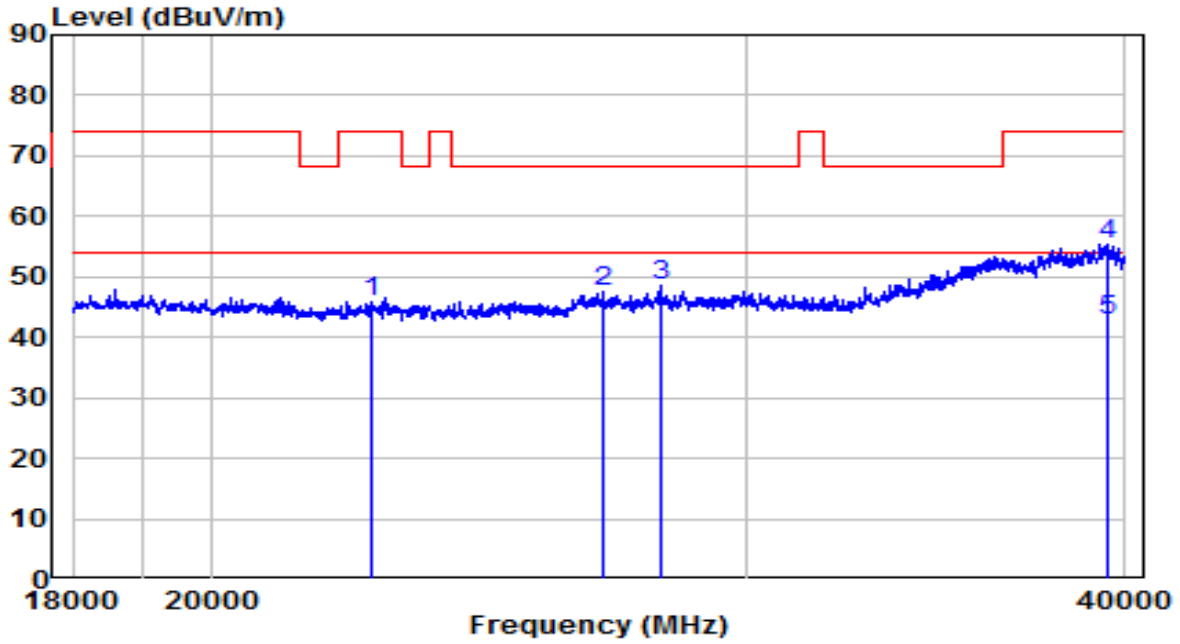


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	22565.000	41.91	3.84	45.75	-28.25	74.00	Peak
2	26910.000	43.37	4.26	47.63	-20.57	68.20	Peak
3	28120.000	44.30	4.30	48.60	-19.60	68.20	Peak
4	39439.000	43.02	12.45	55.47	-18.53	74.00	Peak
5	* 39439.000	30.47	12.45	42.92	-11.08	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-06
Factor	BBHA 9170 (15GHz~40GHz)_2021	Temp. / Humidity	21.6°C/22%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	120V/60Hz

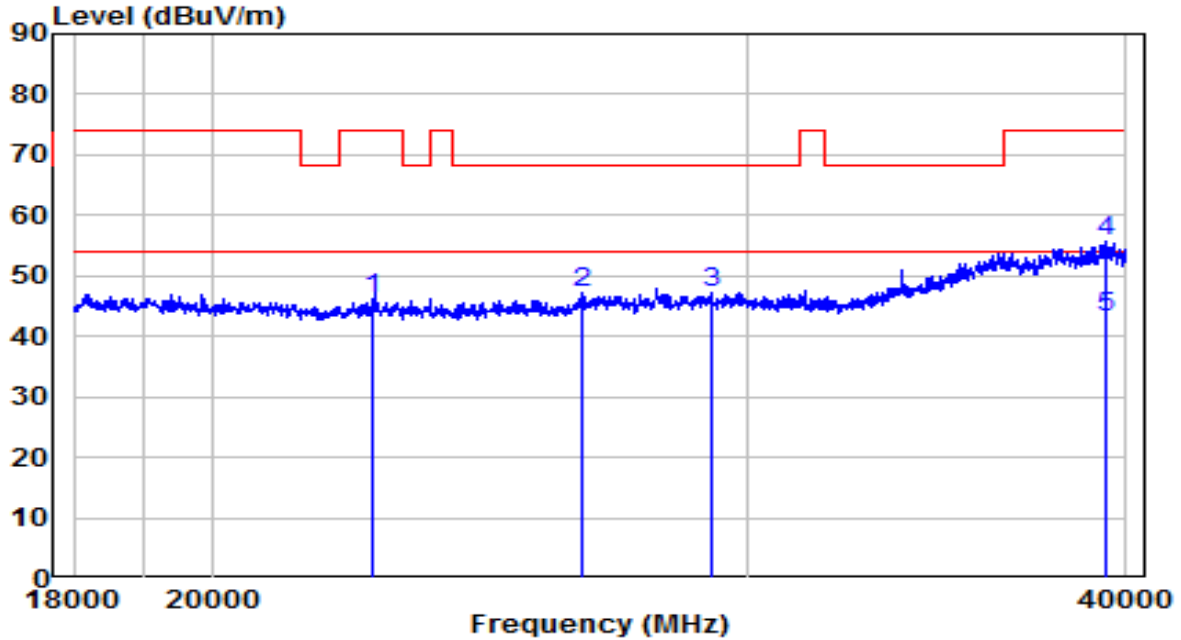


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	22576.000	42.50	3.85	46.35	-27.65	74.00	Peak
2	26459.000	43.06	4.08	47.15	-21.05	68.20	Peak
3	29209.000	42.26	5.01	47.27	-20.93	68.20	Peak
4	39395.000	43.35	12.42	55.77	-18.23	74.00	Peak
5	* 39395.000	30.62	12.42	43.04	-10.96	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

Co-location spurious emission test data

EUT	Access Point	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	29.5°C/37.0%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11b-2412MHz (Filter 1#) + 802.11a-5180MHz	Test Voltage	By PoE

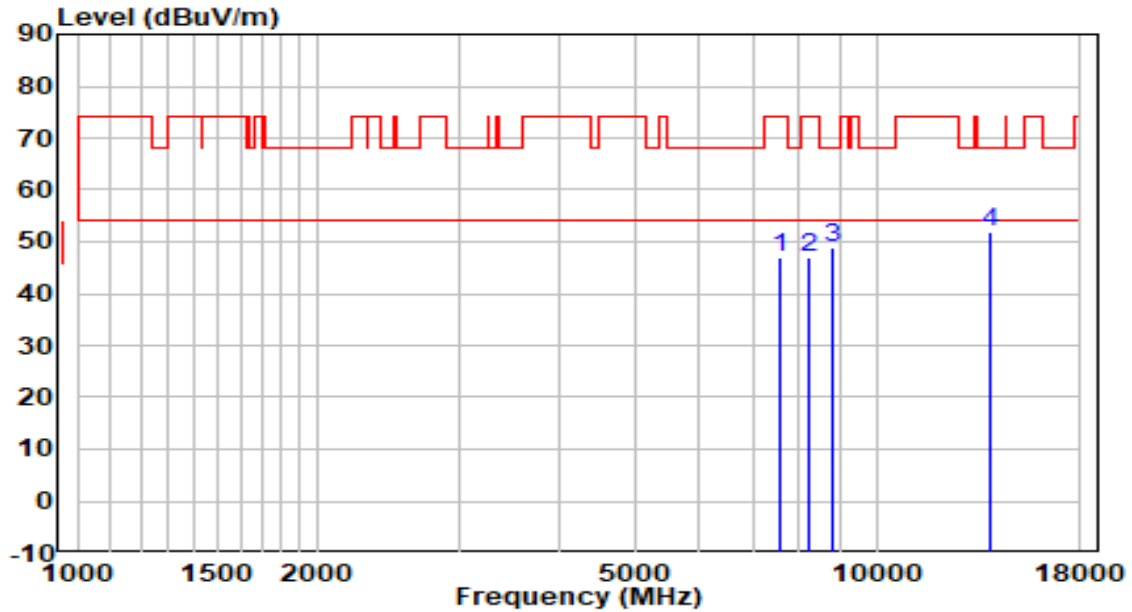


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7570.500	33.89	13.07	46.96	-27.04	74.00	Peak
2	8250.500	33.31	13.54	46.85	-27.15	74.00	Peak
3	8794.500	34.46	14.38	48.84	-19.36	68.20	Peak
4	* 13928.500	29.62	22.34	51.96	-16.24	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	Access Point	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	29.5°C/37.0%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11b-2412MHz (Filter 1#) + 802.11a-5180MHz	Test Voltage	By PoE

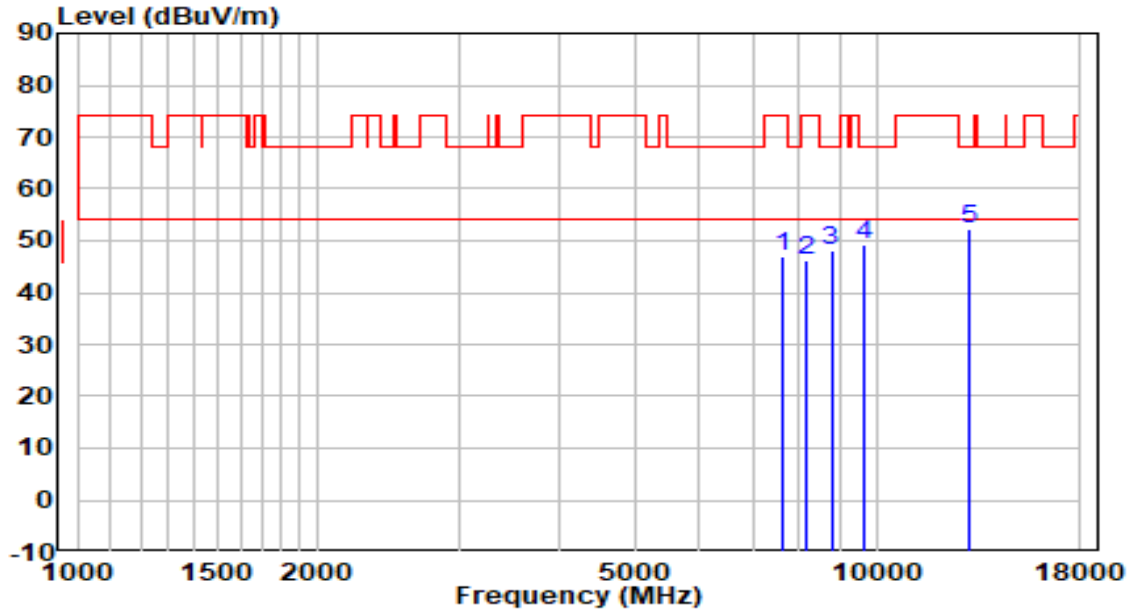


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7647.000	33.82	13.14	46.96	-27.04	74.00	Peak
2	8191.000	32.82	13.52	46.34	-27.66	74.00	Peak
3	8777.500	33.77	14.33	48.10	-20.10	68.20	Peak
4	9627.500	33.45	15.93	49.38	-18.82	68.20	Peak
5	* 13036.000	32.23	20.03	52.26	-15.94	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	Access Point	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	29.5°C/37.0%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11b-2412MHz (Filter 2#) + Zigbee 2480MHz (Filter 6#) + 802.11a-5180MHz	Test Voltage	By PoE

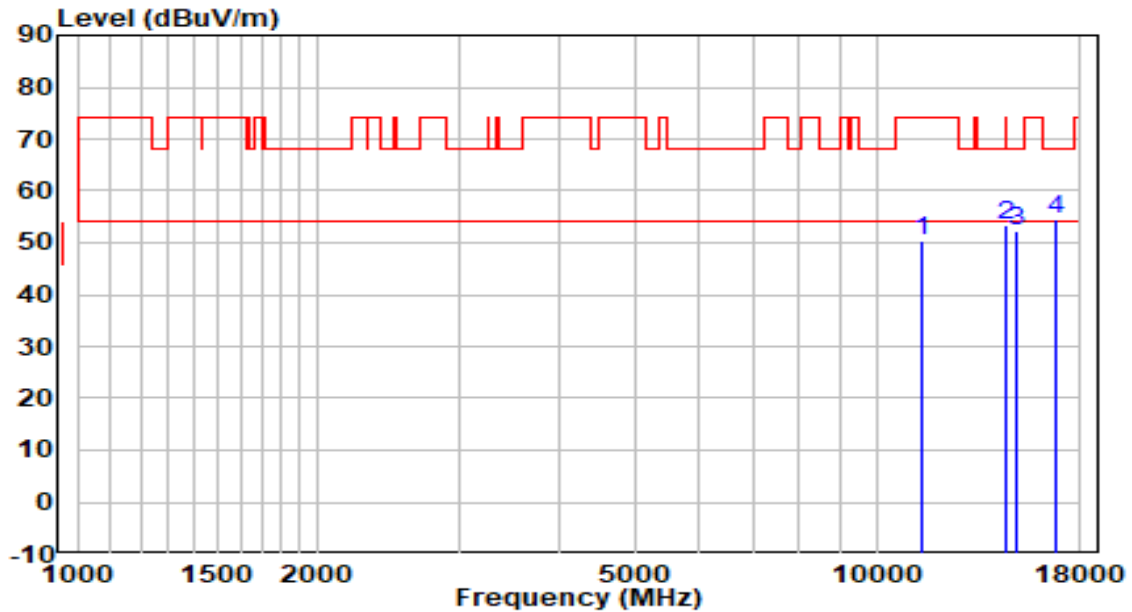


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	11404.000	30.41	19.90	50.31	-23.69	74.00	Peak
2	14489.500	30.77	22.45	53.22	-20.78	74.00	Peak
3	14931.500	30.09	22.14	52.23	-15.97	68.20	Peak
4	* 16733.500	31.69	22.78	54.47	-13.73	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	Access Point	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	29.5°C/37.0%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11b-2412MHz (Filter 2#) + Zigbee 2480MHz (Filter 6#) + 802.11a-5180MHz	Test Voltage	By PoE

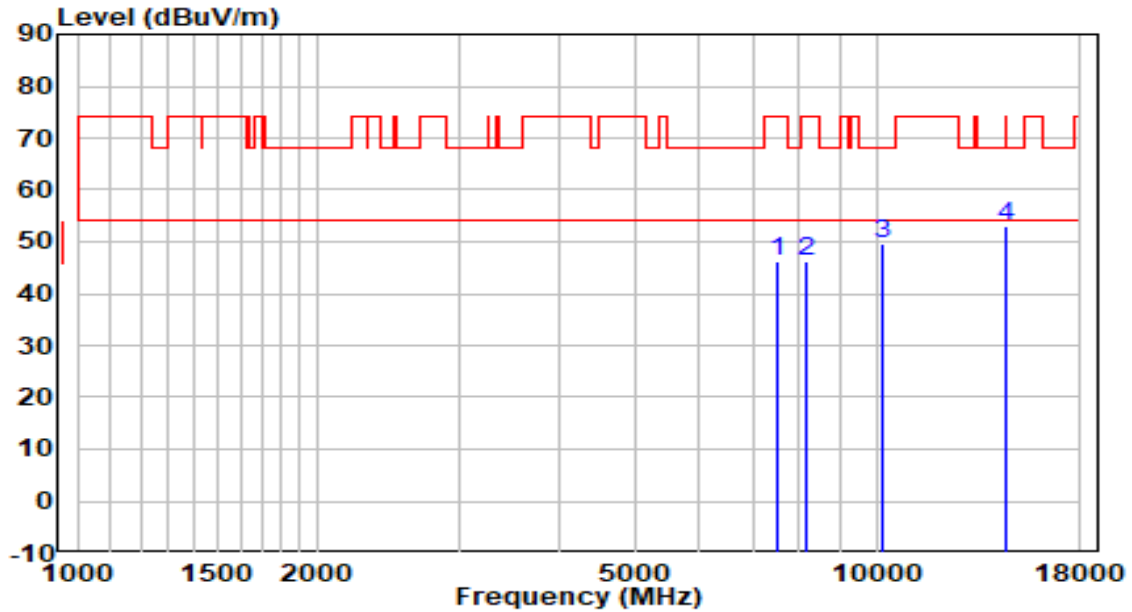


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7494.000	33.27	12.99	46.26	-27.74	74.00	Peak
2	8148.500	32.76	13.50	46.26	-27.74	74.00	Peak
3	10180.000	32.24	17.28	49.52	-18.68	68.20	Peak
4	* 14566.000	30.65	22.41	53.06	-15.14	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	Access Point	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	29.5°C/37.0%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11b-2462MHz (Filter 3#) + Zigbee 2405MHz (Filter 5#) + 802.11a-5180MHz	Test Voltage	By PoE

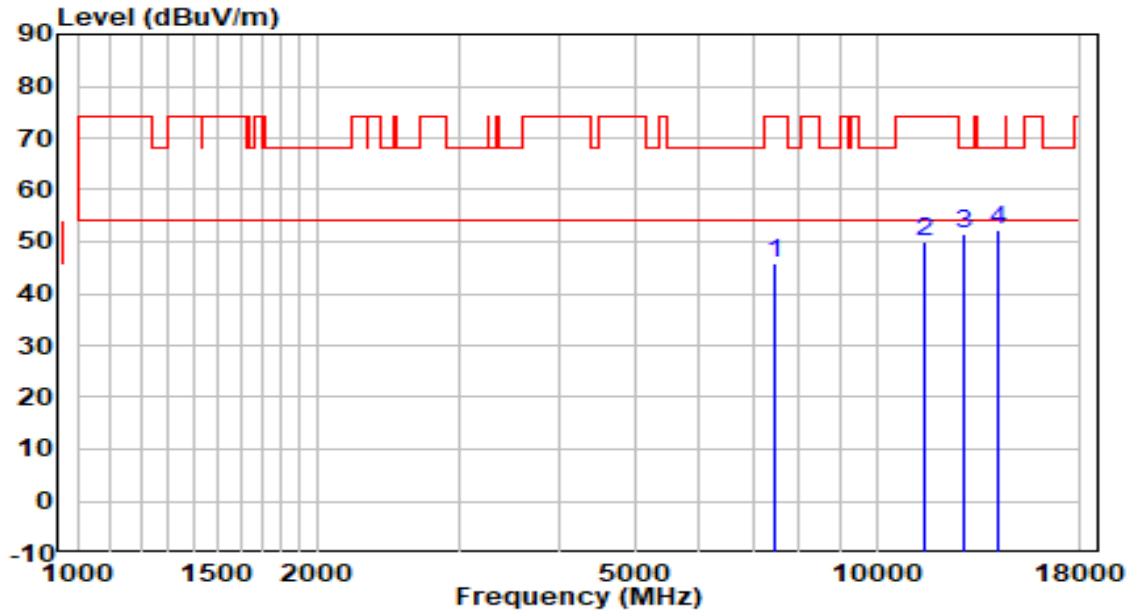


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7485.500	32.91	12.95	45.86	-28.14	74.00	Peak
2	11497.500	30.06	20.05	50.11	-23.89	74.00	Peak
3	12900.000	31.97	19.59	51.56	-16.64	68.20	Peak
4	* 14217.500	29.98	22.44	52.42	-15.78	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	Access Point	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	29.5°C/37.0%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11b-2462MHz (Filter 3#) + Zigbee 2405MHz (Filter 5#) + 802.11a-5180MHz	Test Voltage	By PoE

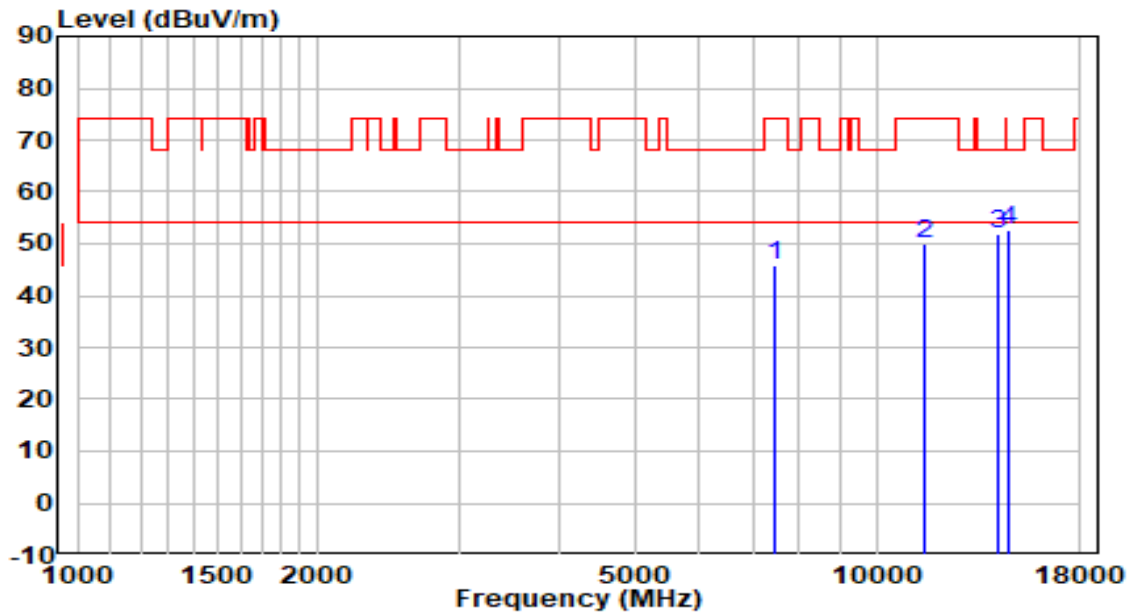


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7468.500	32.87	12.88	45.75	-28.25	74.00	Peak
2	11480.500	29.99	20.02	50.01	-23.99	74.00	Peak
3	14158.000	29.42	22.43	51.85	-16.35	68.20	Peak
4	* 14617.000	30.23	22.37	52.60	-15.60	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-20
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.4°C/49.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11b-2412MHz (Filter 2#) + BLE-1Mbps 2480MHz (Filter 6#) + 802.11a-5180MHz	Test Voltage	120V/60Hz

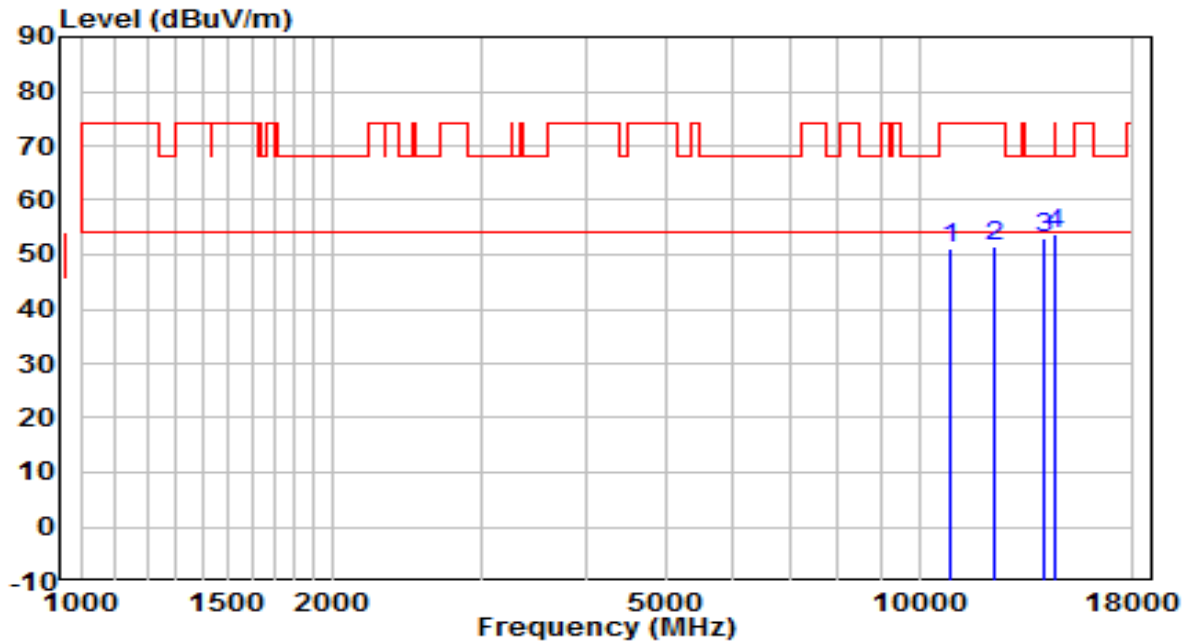


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	10919.500	32.15	19.17	51.32	-22.68	74.00	Peak
2	12279.500	32.80	18.63	51.43	-22.57	74.00	Peak
3	14056.000	30.51	22.42	52.94	-15.26	68.20	Peak
4	* 14566.000	31.32	22.41	53.73	-14.47	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-20
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.4°C/49.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11b-2412MHz (Filter 2#) + BLE-1Mbps 2480MHz (Filter 6#) + 802.11a-5180MHz	Test Voltage	120V/60Hz

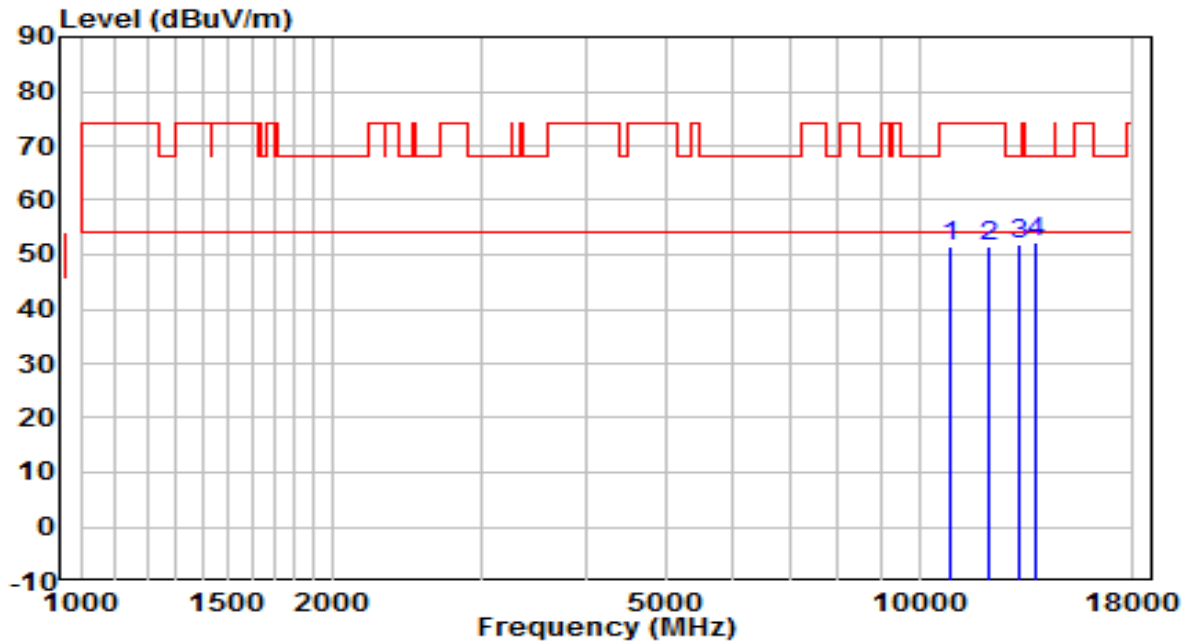


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	10860.000	32.27	19.08	51.35	-22.65	74.00	Peak
2	12109.500	32.75	18.81	51.56	-22.44	74.00	Peak
3	13155.000	31.44	20.50	51.94	-16.26	68.20	Peak
4	* 13741.500	30.27	22.13	52.40	-15.80	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-20
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.4°C/49.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11b-2462MHz (Filter 3#) + BLE-1Mbps 2402MHz (Filter 5#) + 802.11a-5180MHz	Test Voltage	120V/60Hz

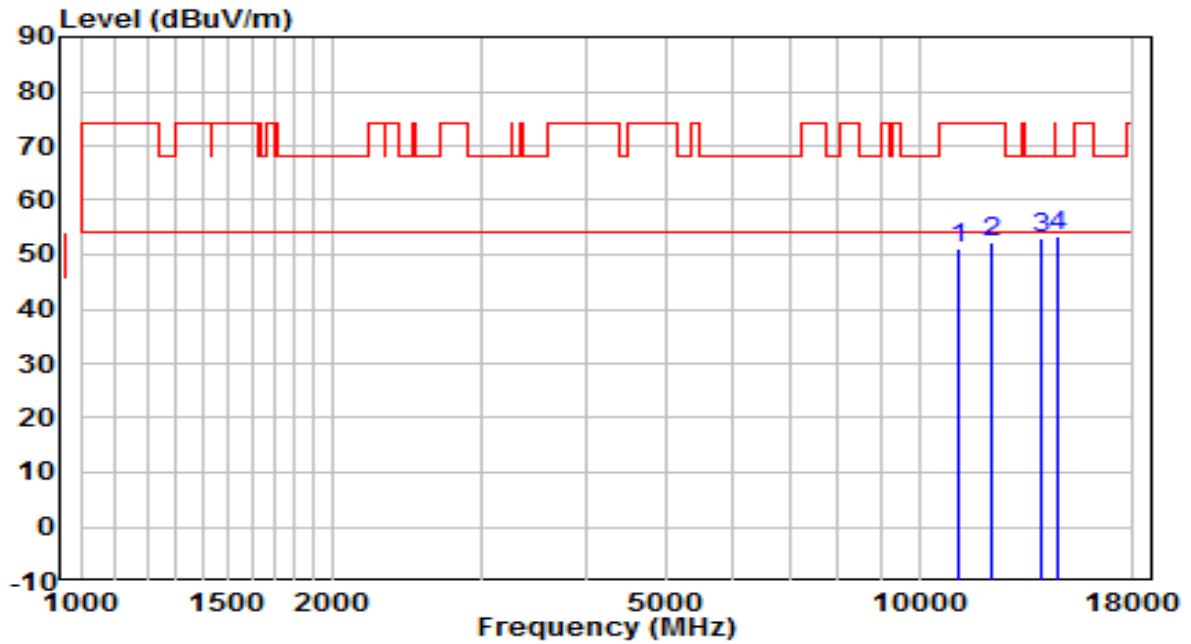


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	11166.000	31.48	19.54	51.02	-22.98	74.00	Peak
2	12203.000	33.55	18.71	52.26	-21.74	74.00	Peak
3	13945.500	30.71	22.36	53.07	-15.13	68.20	Peak
4	* 14676.500	31.12	22.33	53.45	-14.75	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-01-20
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.4°C/49.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11b-2462MHz (Filter 3#) + BLE-1Mbps 2402MHz (Filter 5#) + 802.11a-5180MHz	Test Voltage	120V/60Hz

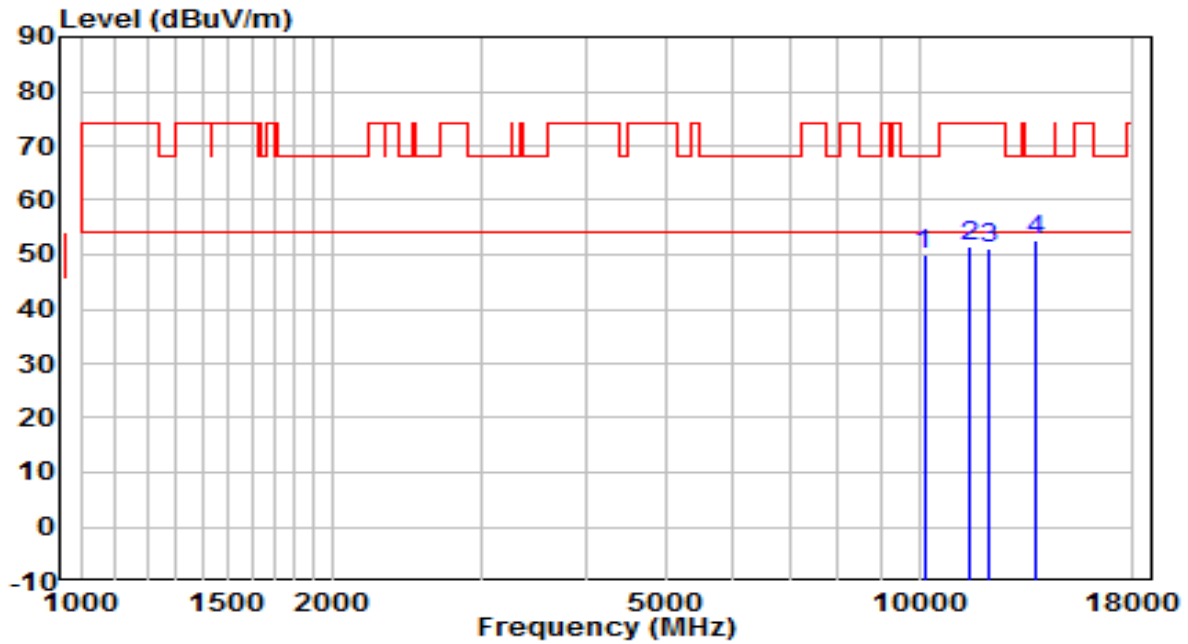

No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	10137.500	32.88	17.11	49.99	-18.21	68.20	Peak
2	11514.500	31.47	20.02	51.49	-22.51	74.00	Peak
3	12135.000	32.20	18.78	50.98	-23.02	74.00	Peak
4	* 13767.000	30.59	22.16	52.75	-15.45	68.20	Peak


Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

4. Radiated Restricted Band Edge Measurement Test Result

APEX0585

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	By PoE

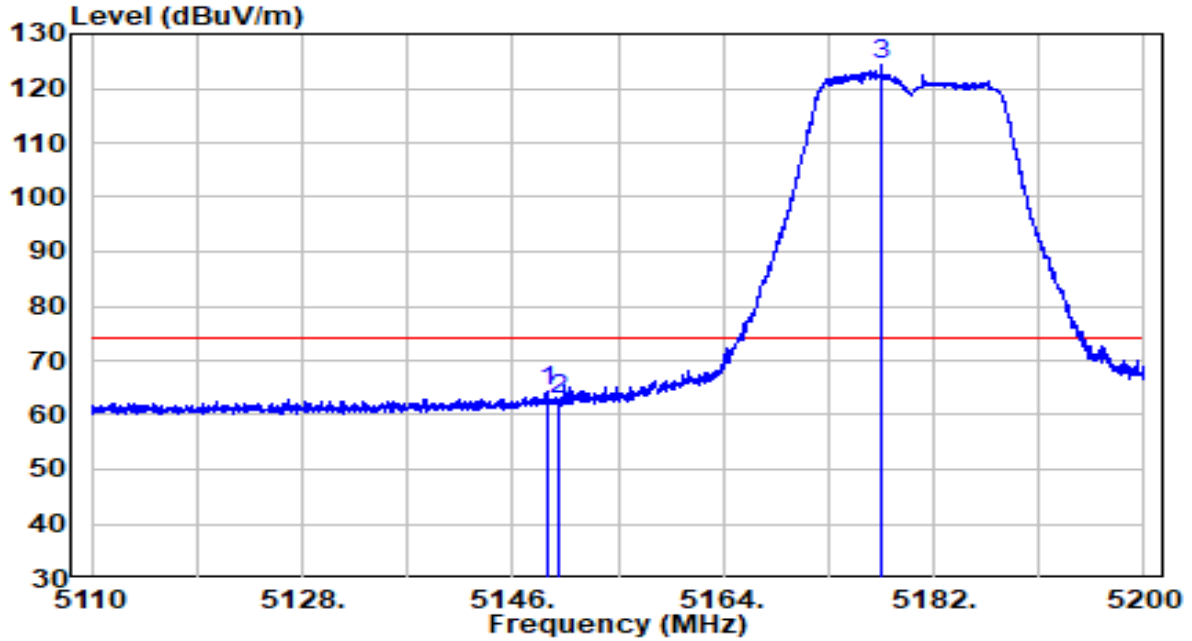


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5149.015	44.07	20.19	64.26	-9.74	74.00	Peak
2	5150.000	42.47	20.20	62.67	-11.33	74.00	Peak
3	* 5177.455	103.92	20.24	124.16	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	By PoE

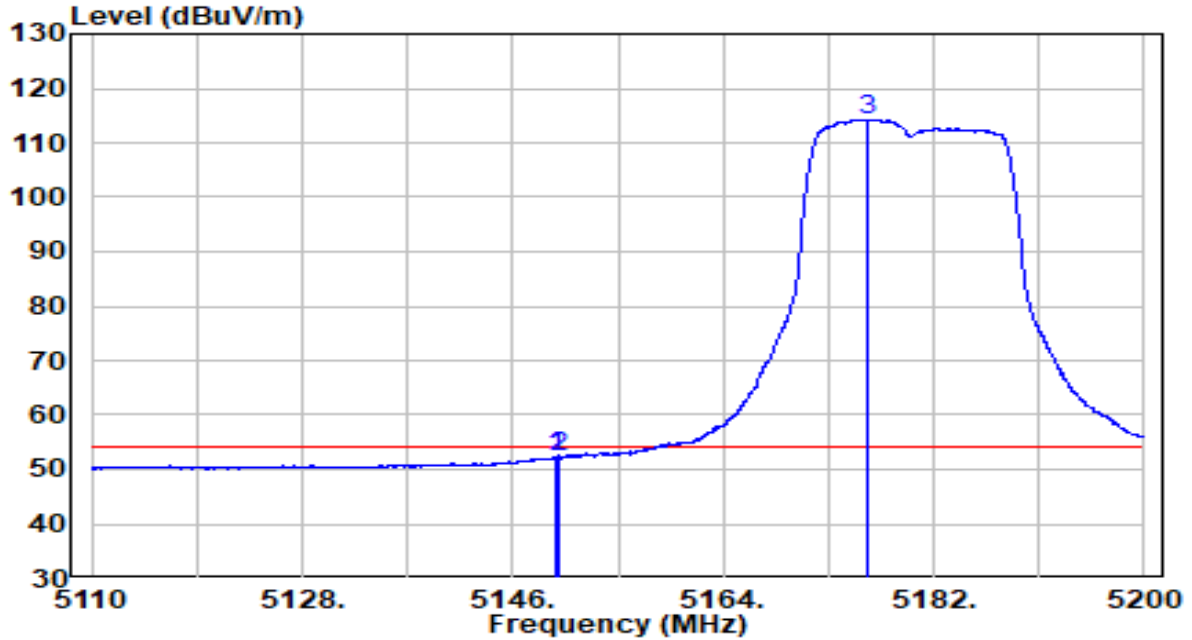


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	5149.645	32.06	20.20	52.25	-1.75	54.00	Average
2	5150.000	32.09	20.20	52.28	-1.72	54.00	Average
3	* 5176.330	94.02	20.24	114.26	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	By PoE

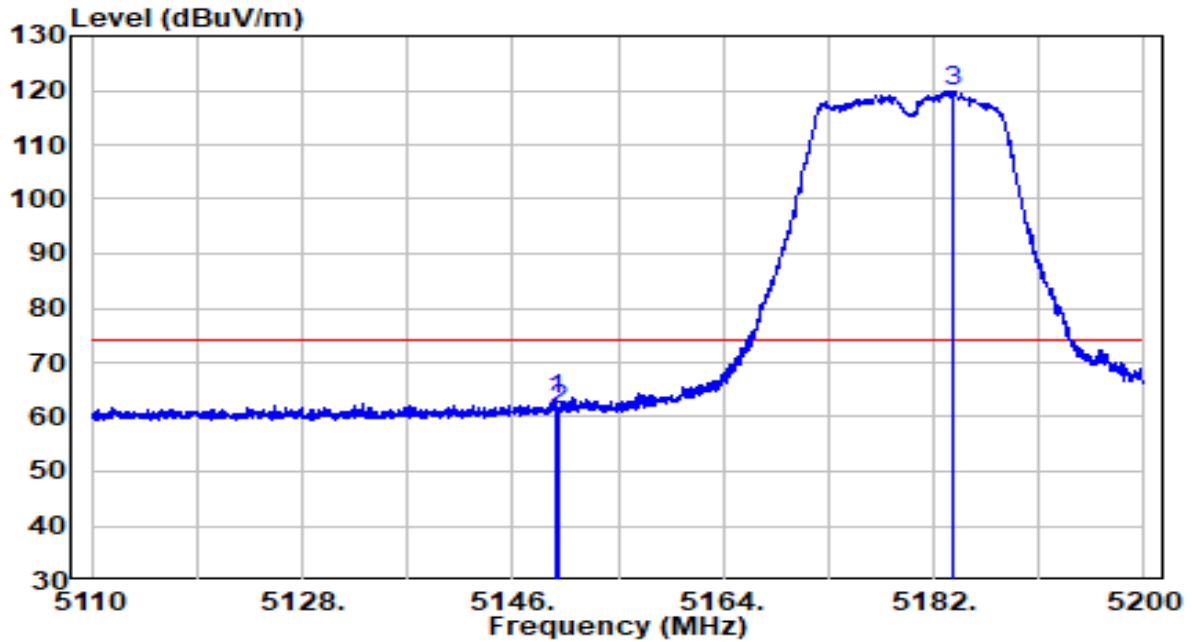


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	5149.780	43.08	20.20	63.28	-10.72	74.00	Peak
2	5150.000	41.01	20.20	61.21	-12.79	74.00	Peak
3	* 5183.575	99.53	20.25	119.78	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	By PoE

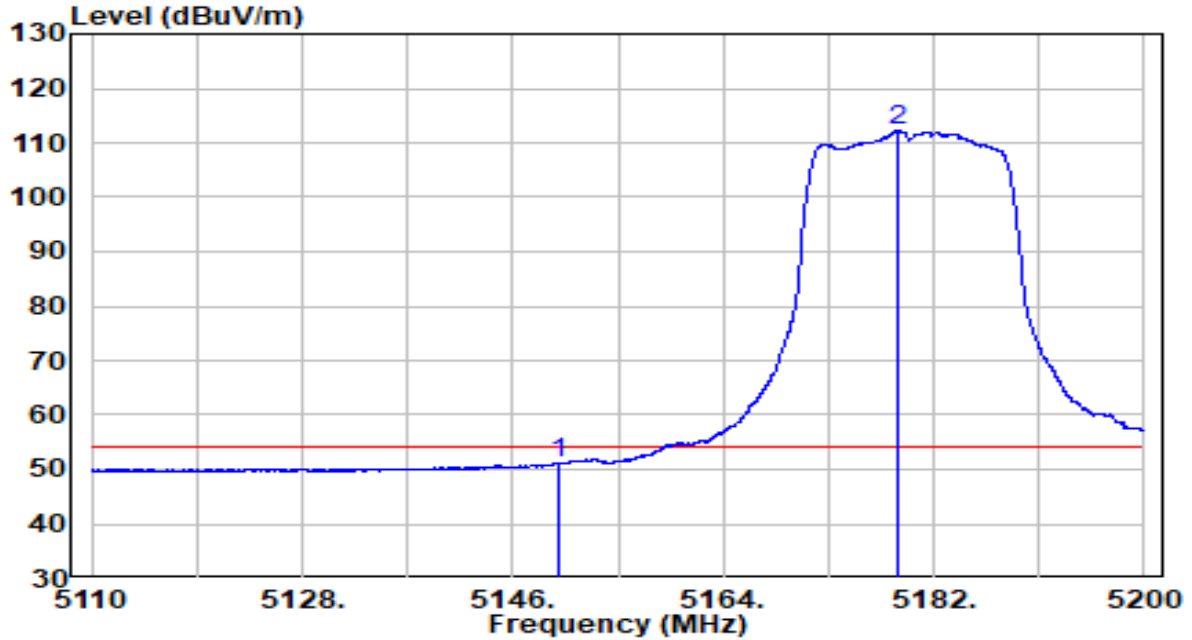


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5150.000	30.86	20.20	51.06	-2.94	54.00	Average
2	* 5178.940	91.92	20.24	112.16	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5320MHz	Test Voltage	By PoE

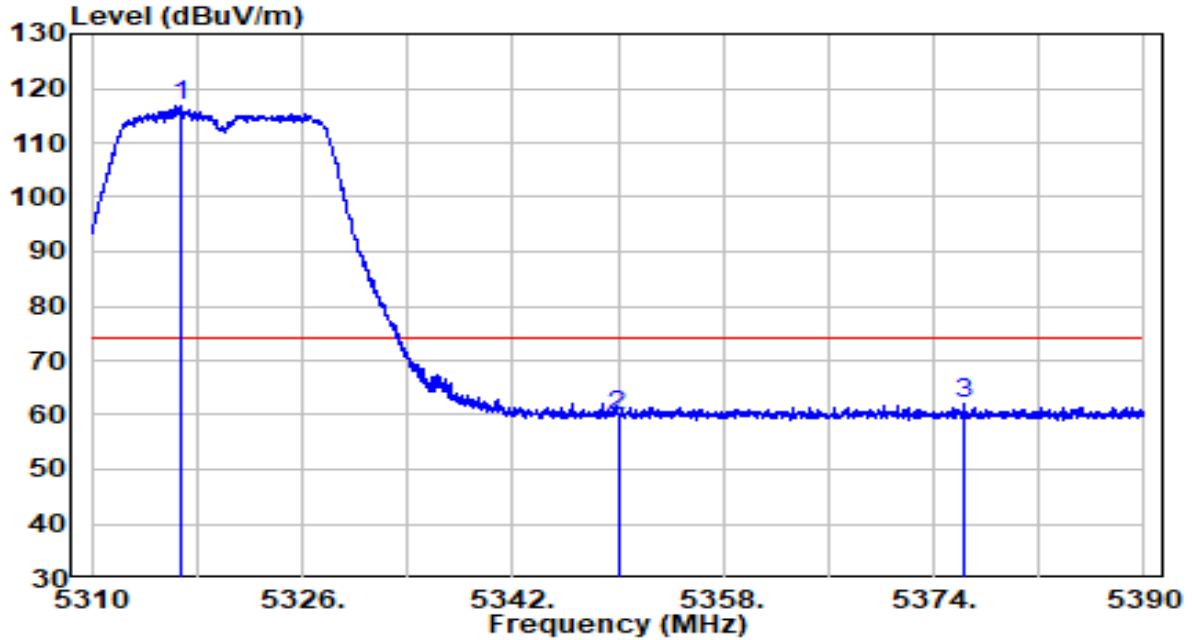


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	* 5316.800	96.42	20.47	116.89	N/A	N/A	Peak
2	5350.000	39.44	20.52	59.96	-14.04	74.00	Peak
3	5376.280	41.43	20.57	62.00	-12.00	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5320MHz	Test Voltage	By PoE

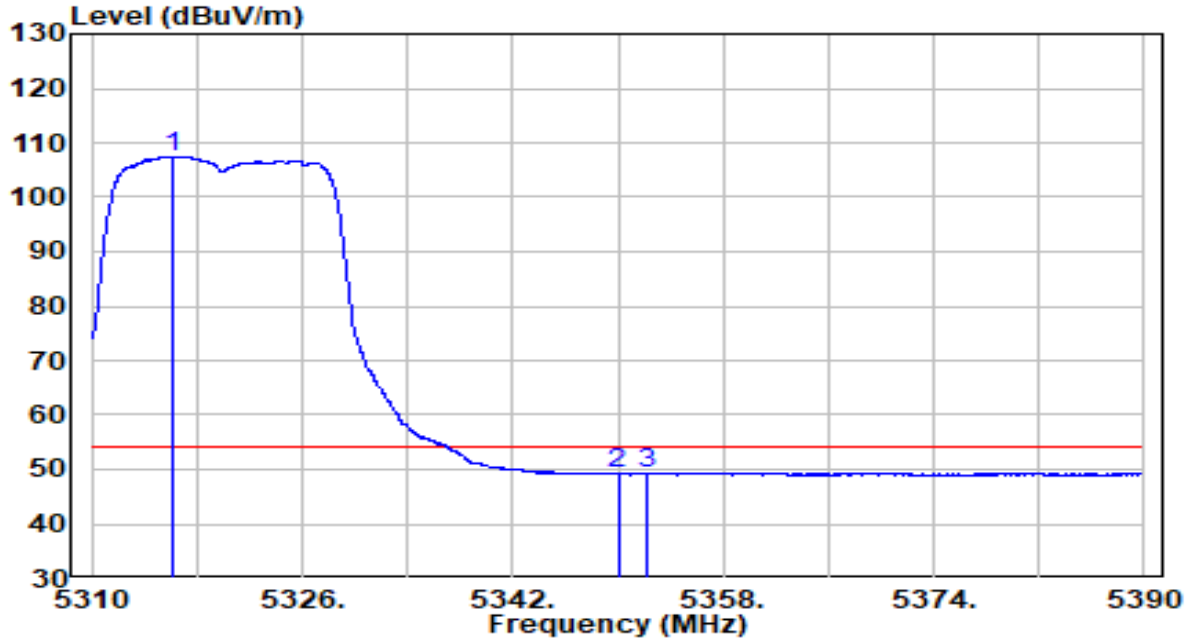


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	* 5316.200	87.04	20.47	107.51	N/A	N/A	Average
2	5350.000	28.57	20.52	49.10	-4.90	54.00	Average
3	5352.200	28.84	20.53	49.37	-4.63	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5320MHz	Test Voltage	By PoE

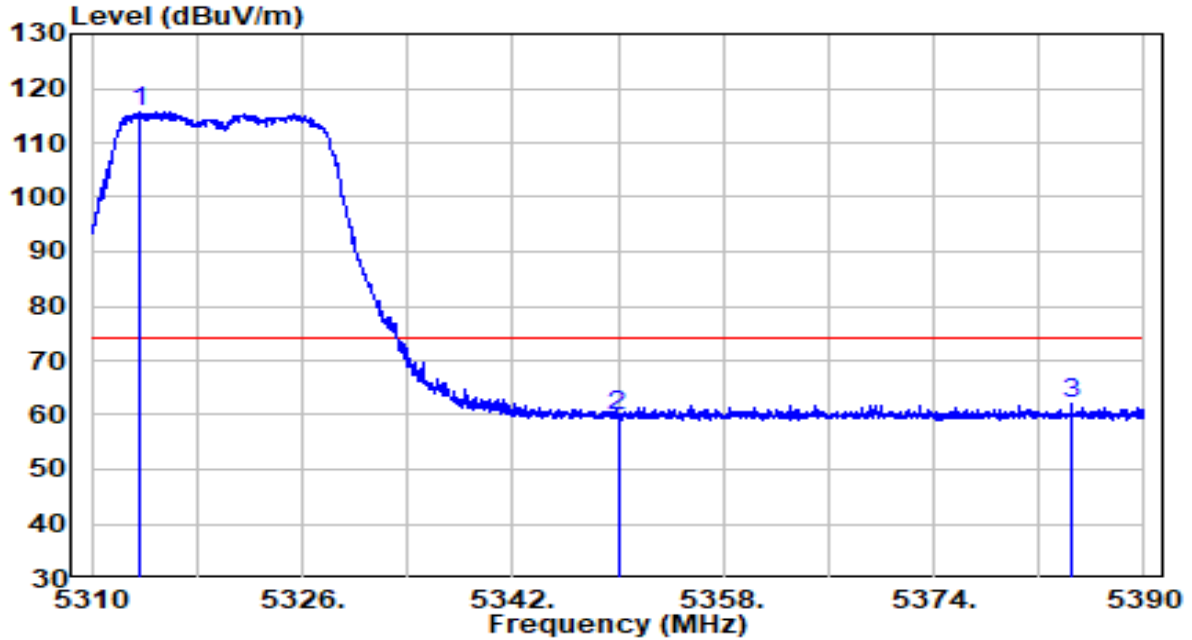


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	* 5313.680	95.10	20.46	115.56	N/A	N/A	Peak
2	5350.000	39.26	20.52	59.79	-14.21	74.00	Peak
3	5384.520	41.36	20.58	61.94	-12.06	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5320MHz	Test Voltage	By PoE

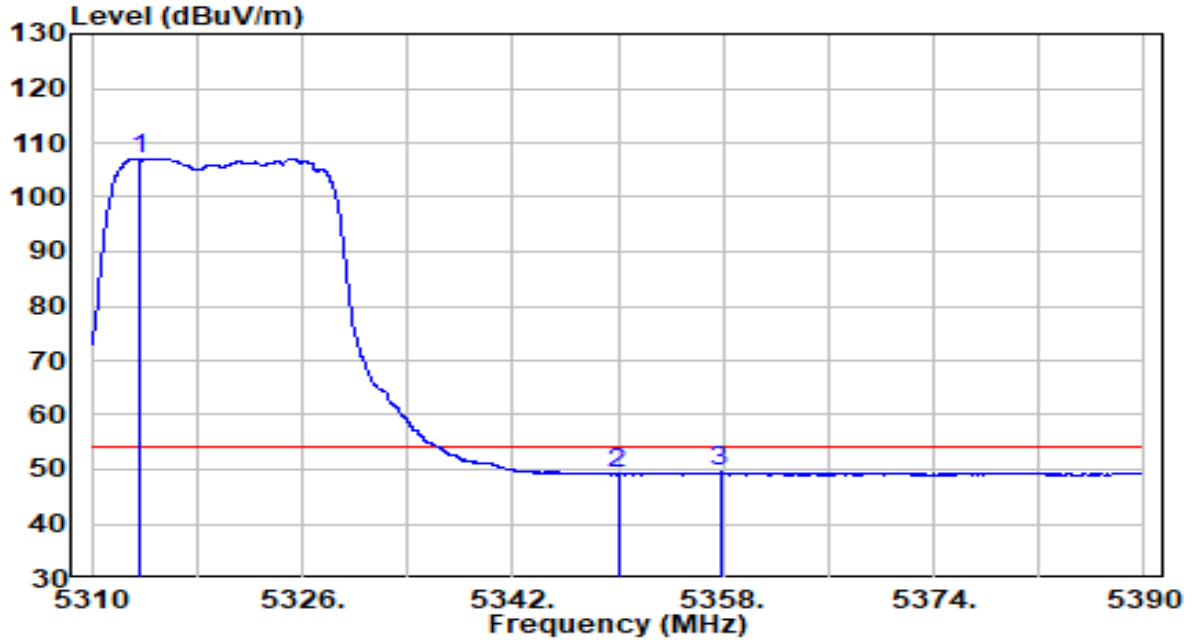


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5313.640	86.69	20.46	107.16	N/A	N/A	Average
2	5350.000	28.60	20.52	49.13	-4.87	54.00	Average
3	5357.760	28.90	20.54	49.43	-4.57	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5500MHz	Test Voltage	By PoE

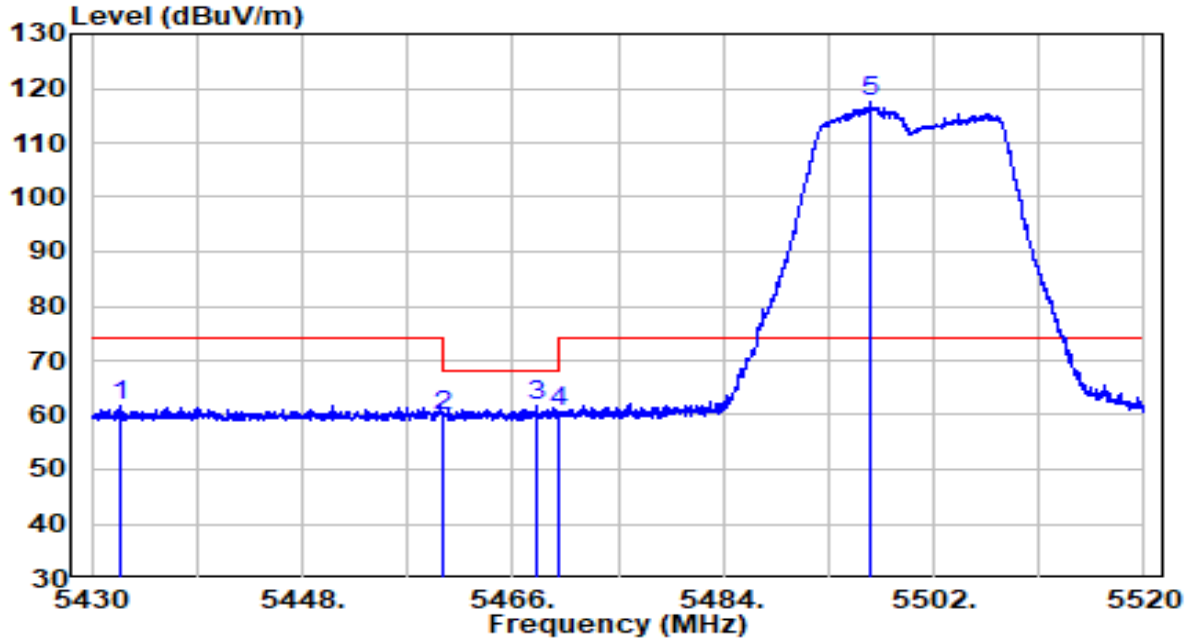


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	5432.520	41.05	20.66	61.71	-12.29	74.00	Peak
2	5460.000	38.97	20.70	59.68	-8.52	68.20	Peak
3	5468.025	40.89	20.72	61.60	-6.60	68.20	Peak
4	5470.000	39.86	20.72	60.58	-7.62	68.20	Peak
5	* 5496.645	96.67	20.76	117.44	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5500MHz	Test Voltage	By PoE

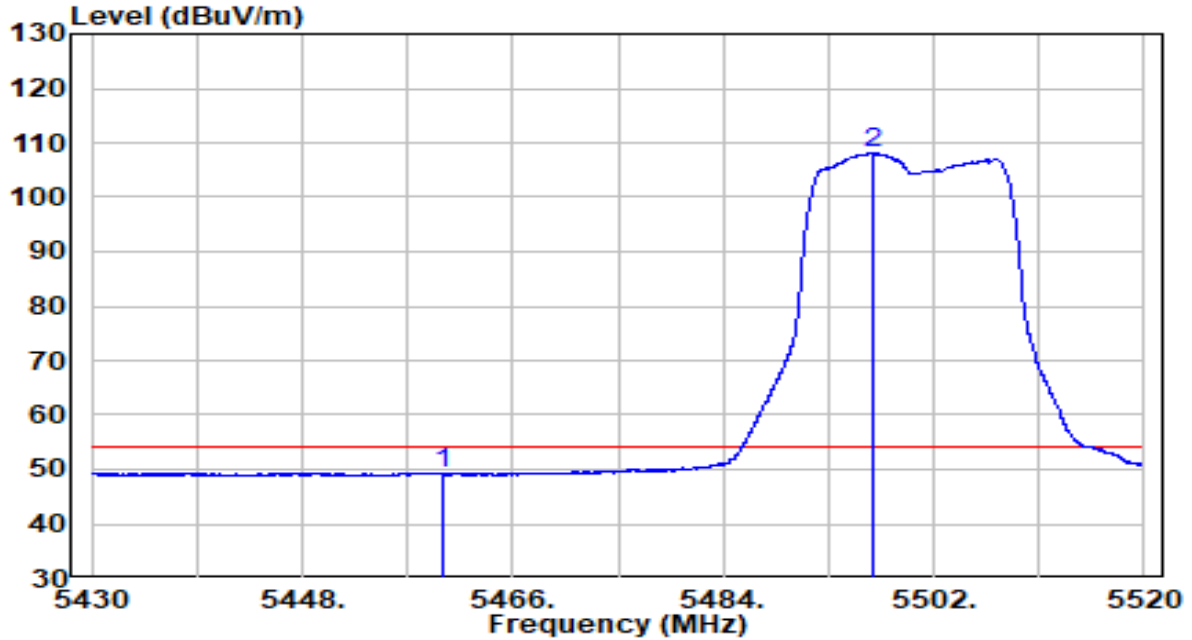


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	5460.000	28.45	20.70	49.16	-4.84	54.00	Average
2	* 5496.870	87.36	20.76	108.12	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5500MHz	Test Voltage	By PoE

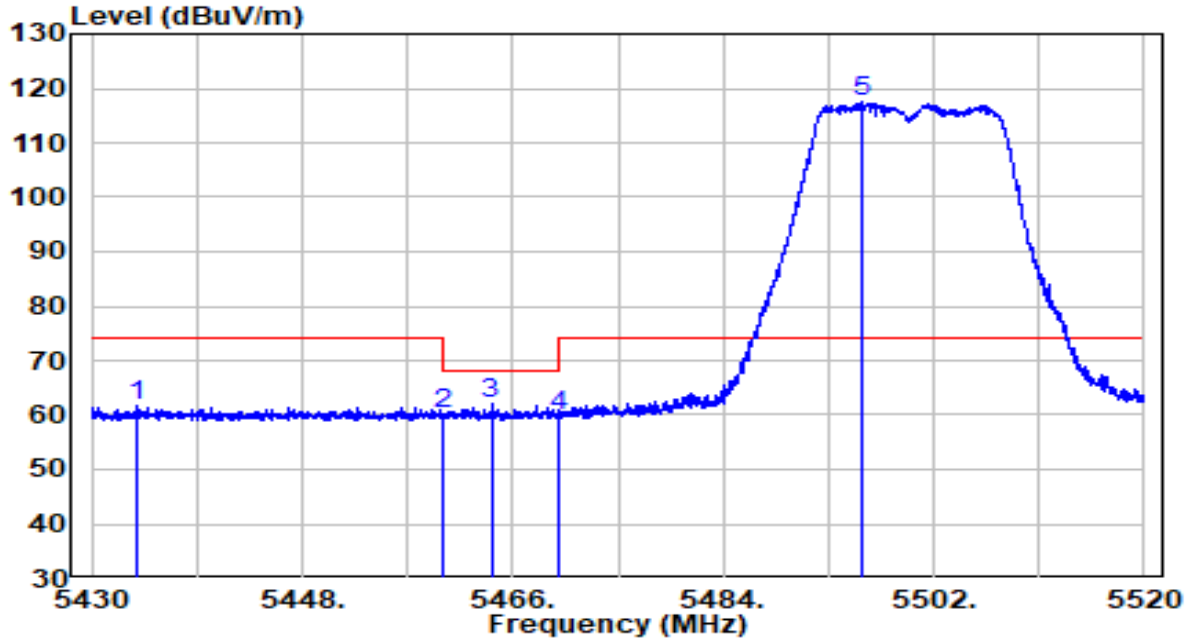


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5433.960	40.95	20.66	61.61	-12.39	74.00	Peak
2	5460.000	39.52	20.70	60.22	-7.98	68.20	Peak
3	5464.155	41.32	20.71	62.03	-6.17	68.20	Peak
4	5470.000	39.22	20.72	59.94	-8.26	68.20	Peak
5	* 5495.790	96.60	20.76	117.37	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5500MHz	Test Voltage	By PoE

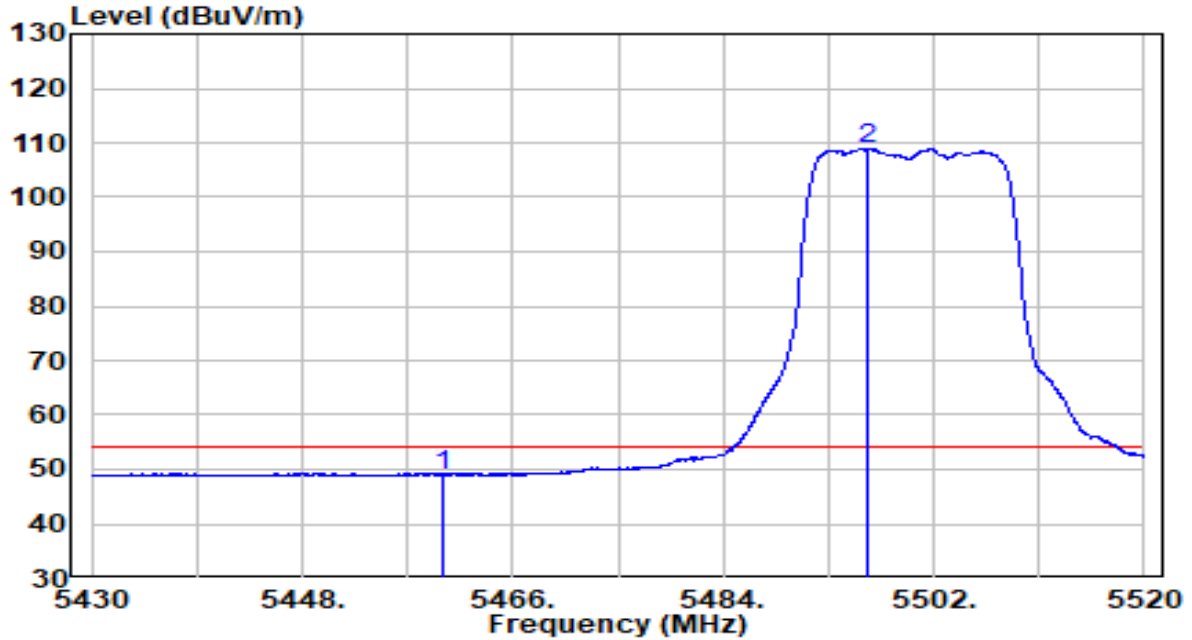


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	5460.000	28.28	20.70	48.99	-5.01	54.00	Average
2	* 5496.420	88.01	20.76	108.77	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5700MHz	Test Voltage	By PoE

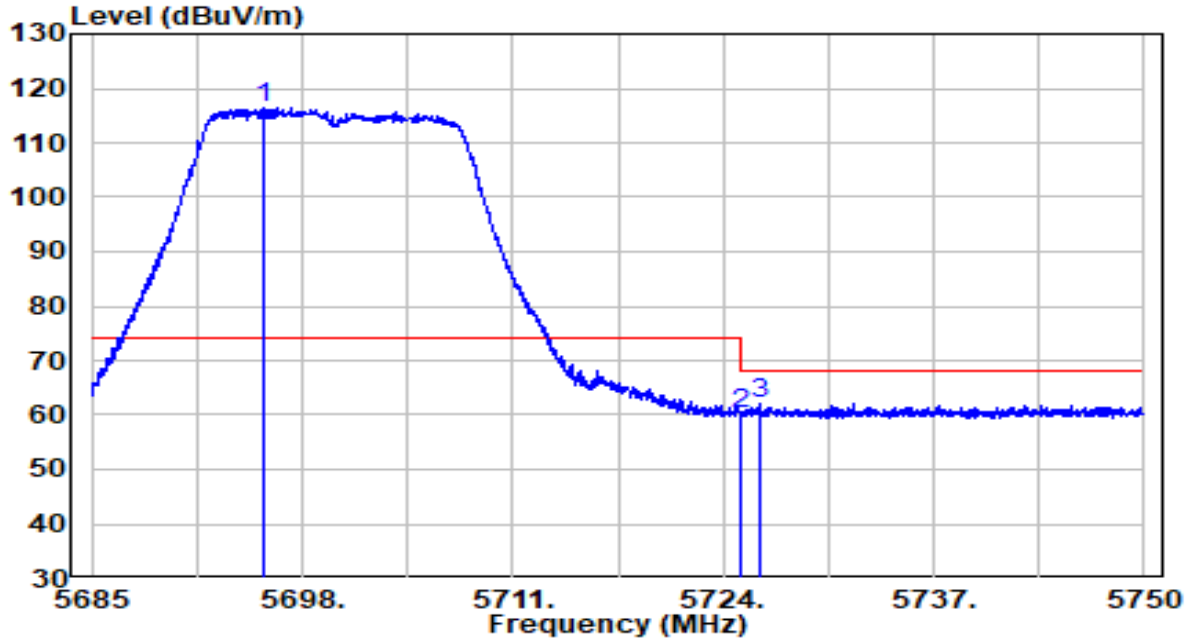


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	* 5695.627	94.89	21.48	116.37	N/A	N/A	Peak
2	5725.000	38.62	21.59	60.21	-7.99	68.20	Peak
3	5726.275	40.44	21.59	62.04	-6.16	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5700MHz	Test Voltage	By PoE

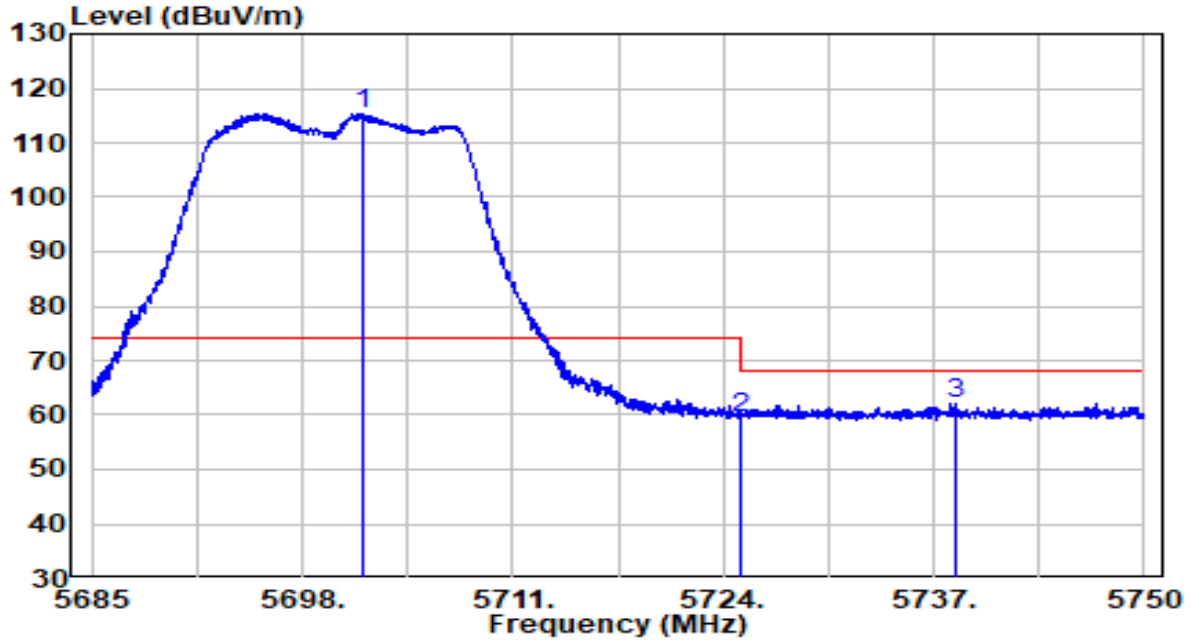


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5701.803	93.93	21.50	115.44	N/A	N/A	Peak
2	5725.000	37.93	21.59	59.52	-8.68	68.20	Peak
3	5738.365	40.60	21.64	62.24	-5.96	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	By PoE

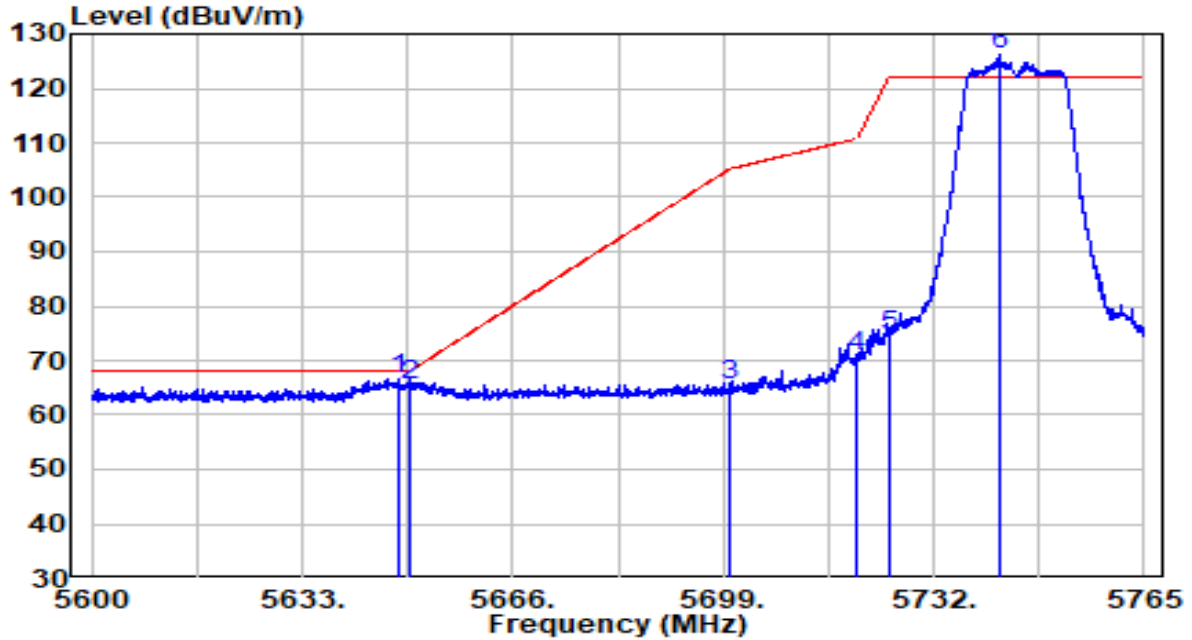


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5648.098	45.24	21.31	66.54	-1.66	68.20	Peak
2	5650.000	44.10	21.32	65.42	-2.78	68.20	Peak
3	5700.000	43.79	21.50	65.29	-39.91	105.20	Peak
4	5720.000	49.06	21.57	70.63	-40.17	110.80	Peak
5	5725.000	52.79	21.59	74.38	-47.82	122.20	Peak
6	* 5742.230	104.68	21.65	126.33	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	By PoE

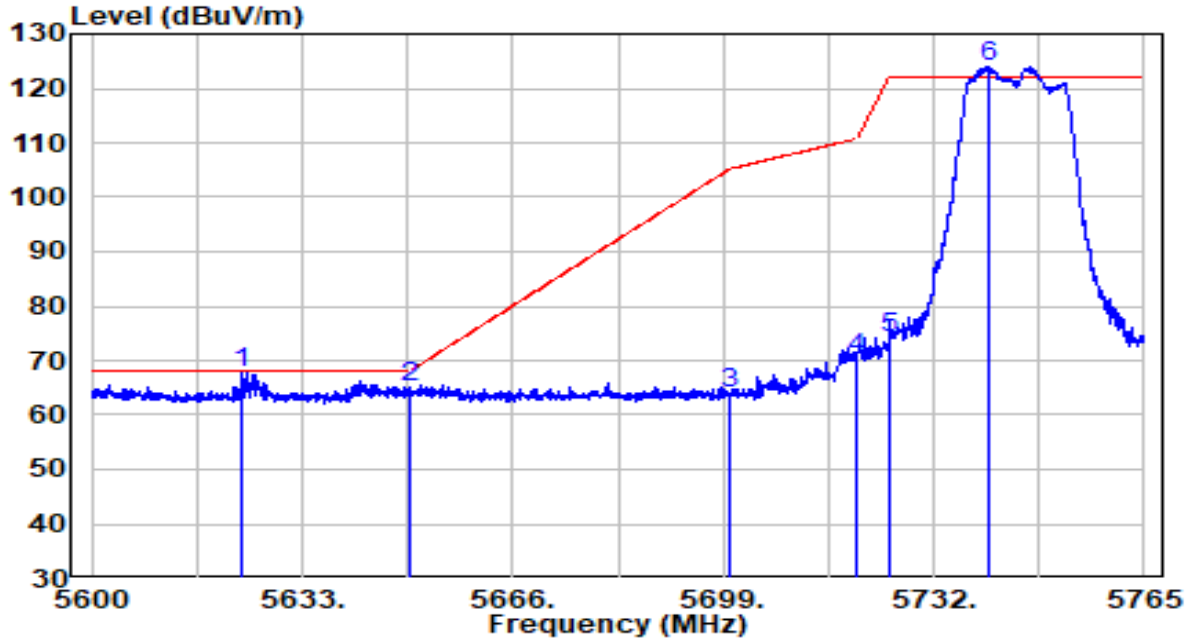


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5623.595	46.38	21.22	67.60	-0.60	68.20	Peak
2	5650.000	43.92	21.32	65.24	-2.96	68.20	Peak
3	5700.000	42.39	21.50	63.89	-41.31	105.20	Peak
4	5720.000	48.62	21.57	70.19	-40.61	110.80	Peak
5	5725.000	52.38	21.59	73.97	-48.23	122.20	Peak
6	* 5740.663	102.27	21.65	123.92	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5825MHz	Test Voltage	By PoE

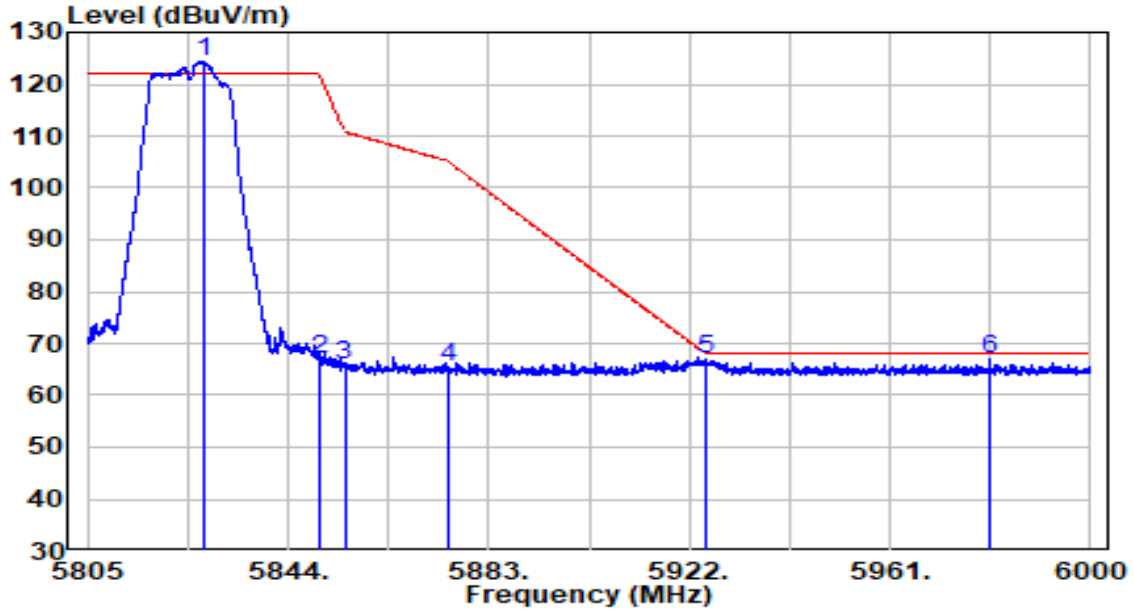


No	Frequency (MHz)	Reading (dBµV)	C.F (dB/m)	Measurement (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Remark (QP/PK/AV)
1	* 5827.913	102.56	21.96	124.52	N/A	N/A	Peak
2	5850.000	45.09	22.04	67.14	-55.06	122.20	Peak
3	5855.000	43.76	22.06	65.82	-44.98	110.80	Peak
4	5875.000	43.47	22.14	65.61	-39.59	105.20	Peak
5	5925.000	44.50	22.32	66.81	-1.39	68.20	Peak
6	5980.402	44.34	22.52	66.86	-1.34	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBµV/m) = Reading(dBµV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5825MHz	Test Voltage	By PoE

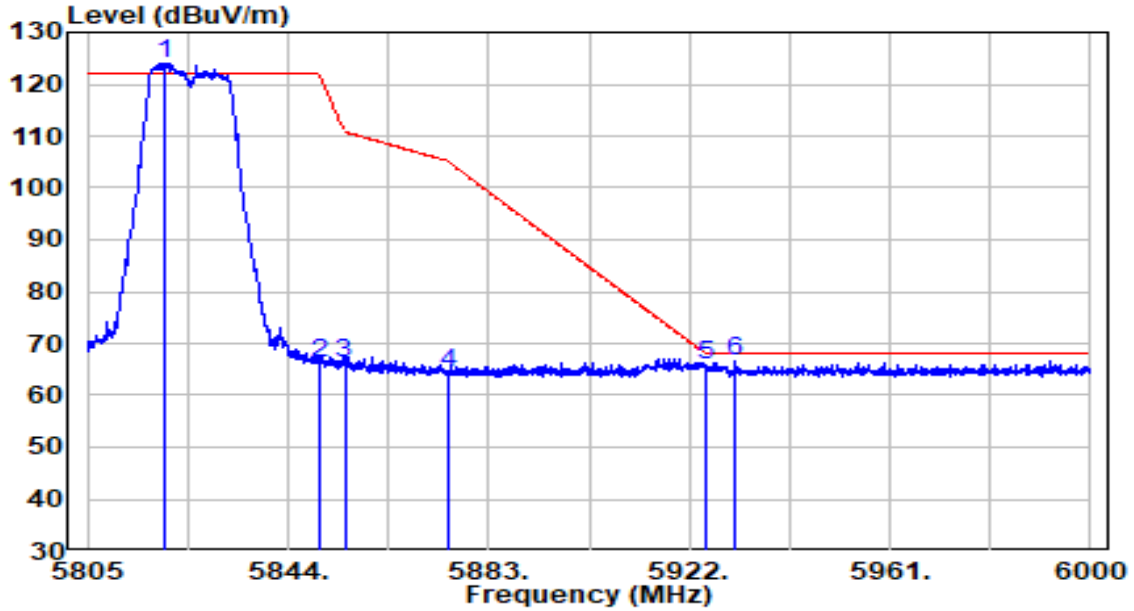


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5820.015	102.06	21.93	124.00	N/A	N/A	Peak
2	5850.000	44.13	22.04	66.18	-56.02	122.20	Peak
3	5855.000	44.20	22.06	66.26	-44.54	110.80	Peak
4	5875.000	42.27	22.14	64.41	-40.79	105.20	Peak
5	5925.000	43.49	22.32	65.81	-2.39	68.20	Peak
6	5930.873	44.18	22.34	66.52	-1.68	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	By PoE

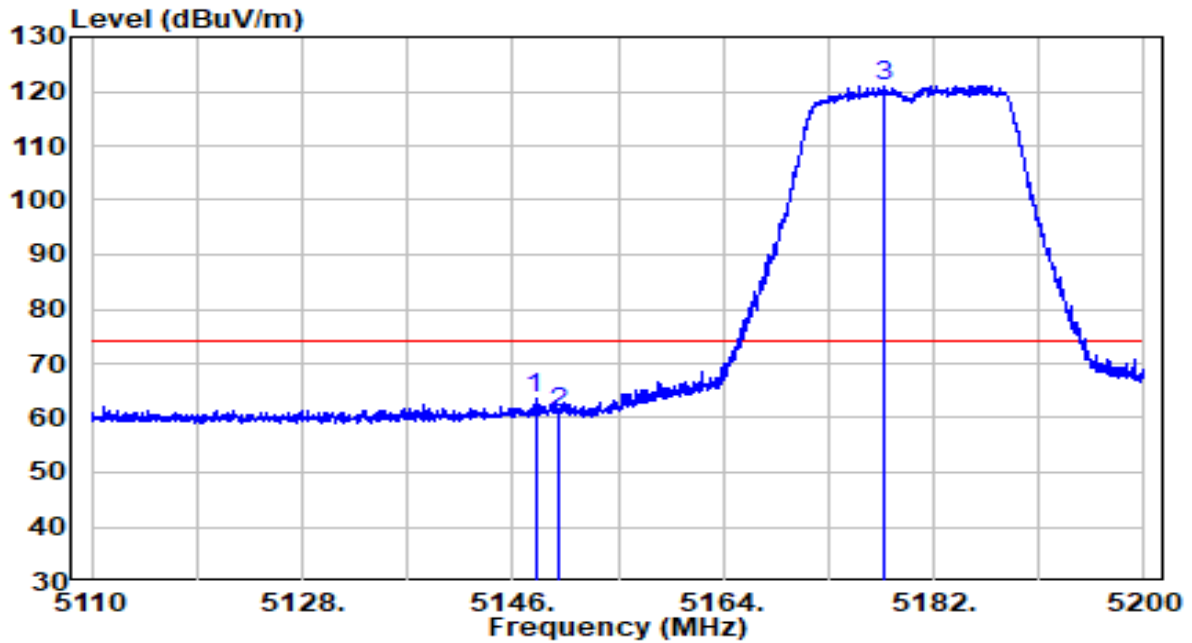


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	5147.935	43.37	20.19	63.56	-10.44	74.00	Peak
2	5150.000	40.93	20.20	61.13	-12.87	74.00	Peak
3	* 5177.680	100.74	20.24	120.98	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	By PoE

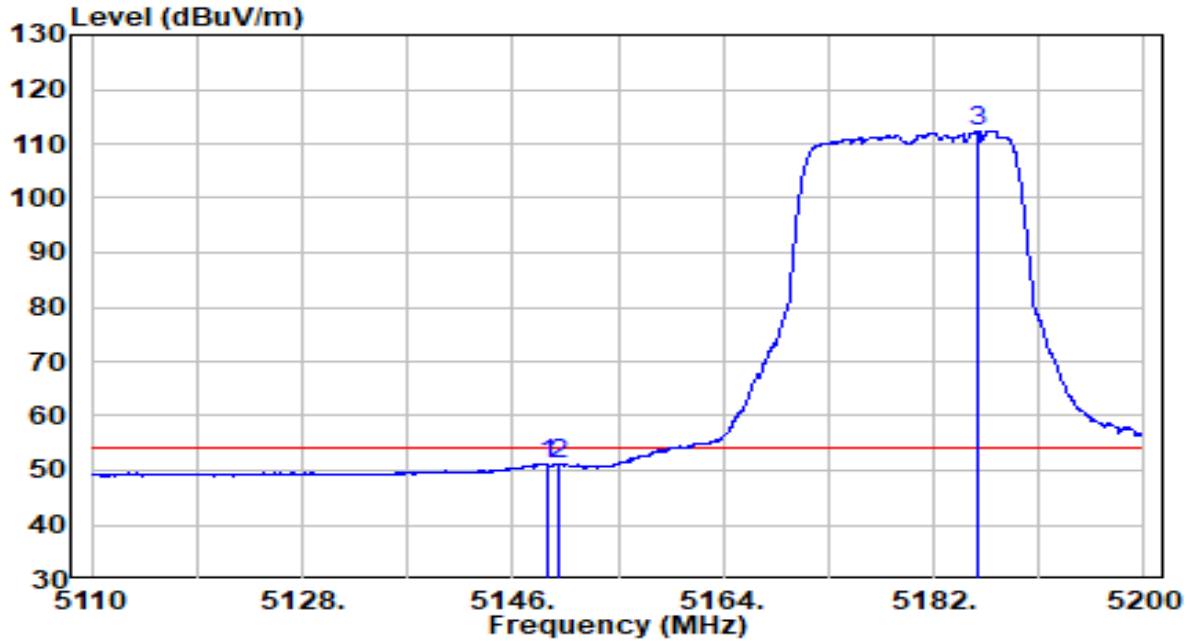


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5149.015	30.98	20.19	51.18	-2.82	54.00	Average
2	5150.000	30.91	20.20	51.11	-2.89	54.00	Average
3	* 5185.870	91.99	20.25	112.25	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	By PoE

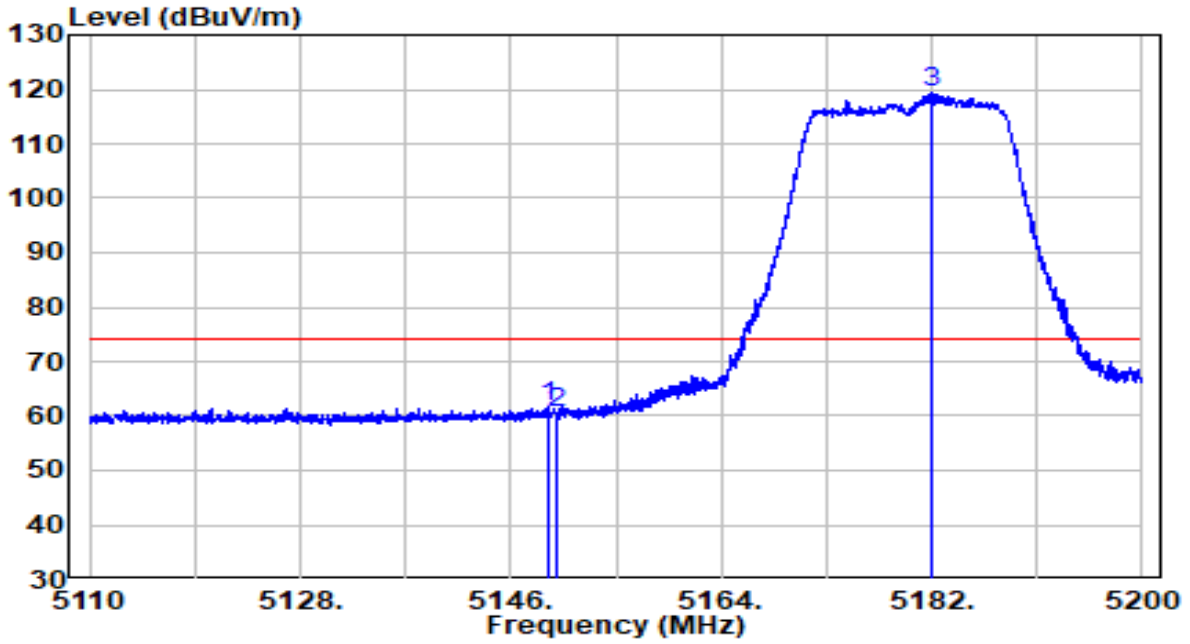


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5149.240	41.57	20.19	61.76	-12.24	74.00	Peak
2	5150.000	40.19	20.20	60.39	-13.61	74.00	Peak
3	* 5182.000	99.20	20.25	119.45	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	By PoE

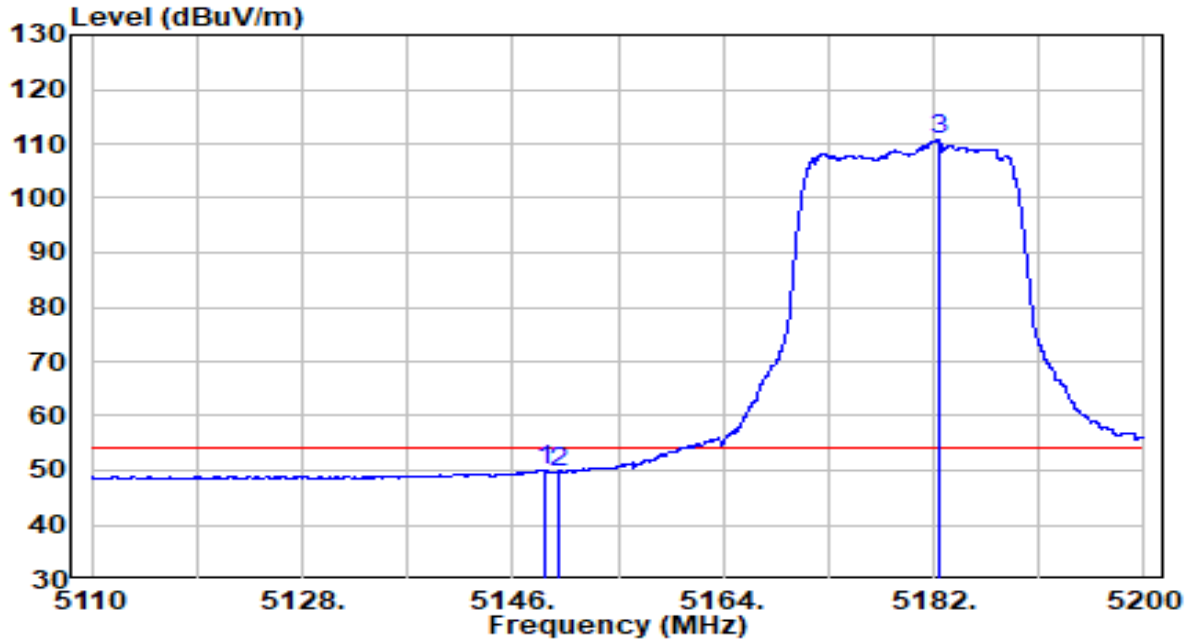


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5148.745	29.73	20.19	49.93	-4.07	54.00	Average
2	5150.000	29.61	20.20	49.80	-4.20	54.00	Average
3	* 5182.360	90.42	20.25	110.67	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	By PoE

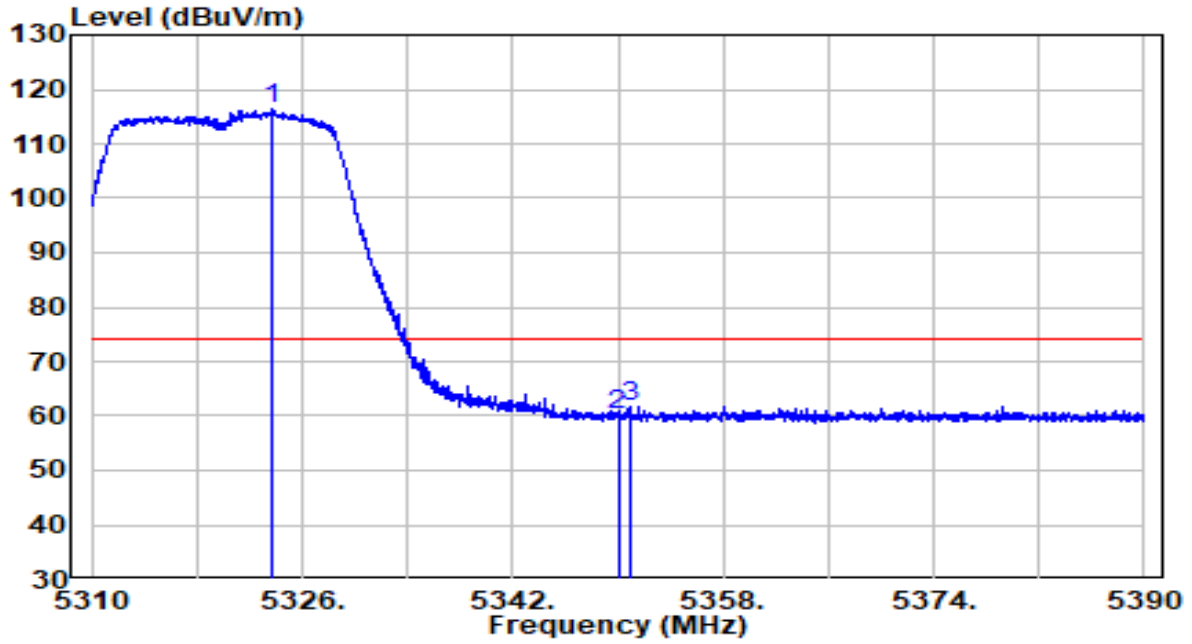


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5323.720	96.03	20.48	116.51	N/A	N/A	Peak
2	5350.000	39.75	20.52	60.28	-13.72	74.00	Peak
3	5350.880	41.06	20.53	61.59	-12.41	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	By PoE

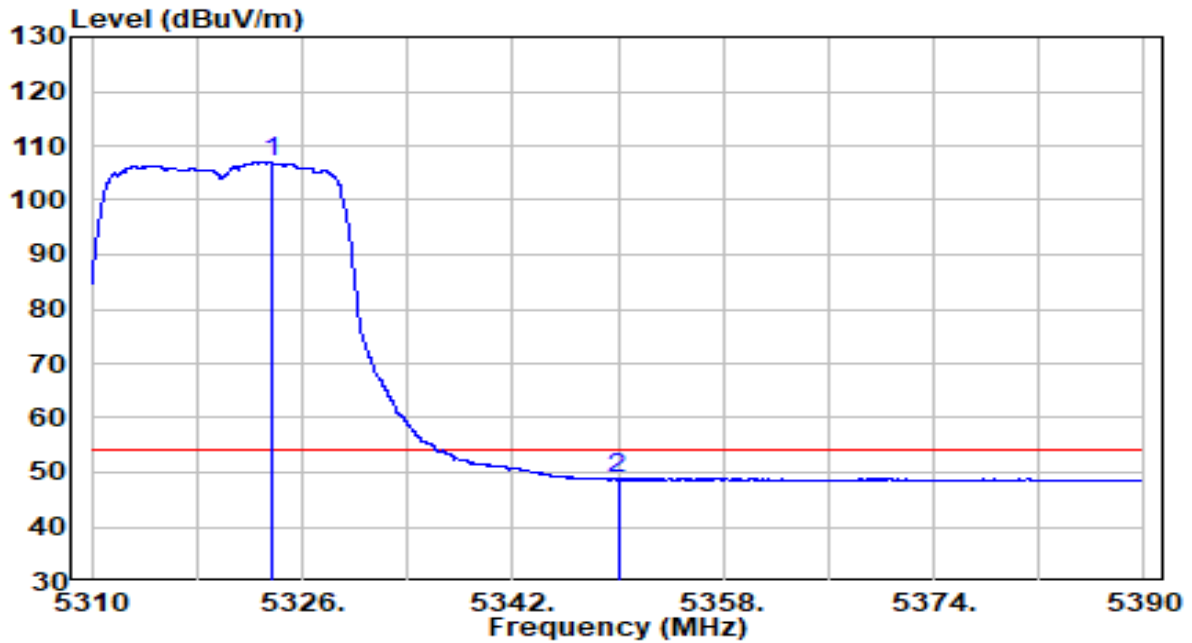


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5323.640	86.47	20.48	106.95	N/A	N/A	Average
2	5350.000	28.16	20.52	48.69	-5.31	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	By PoE

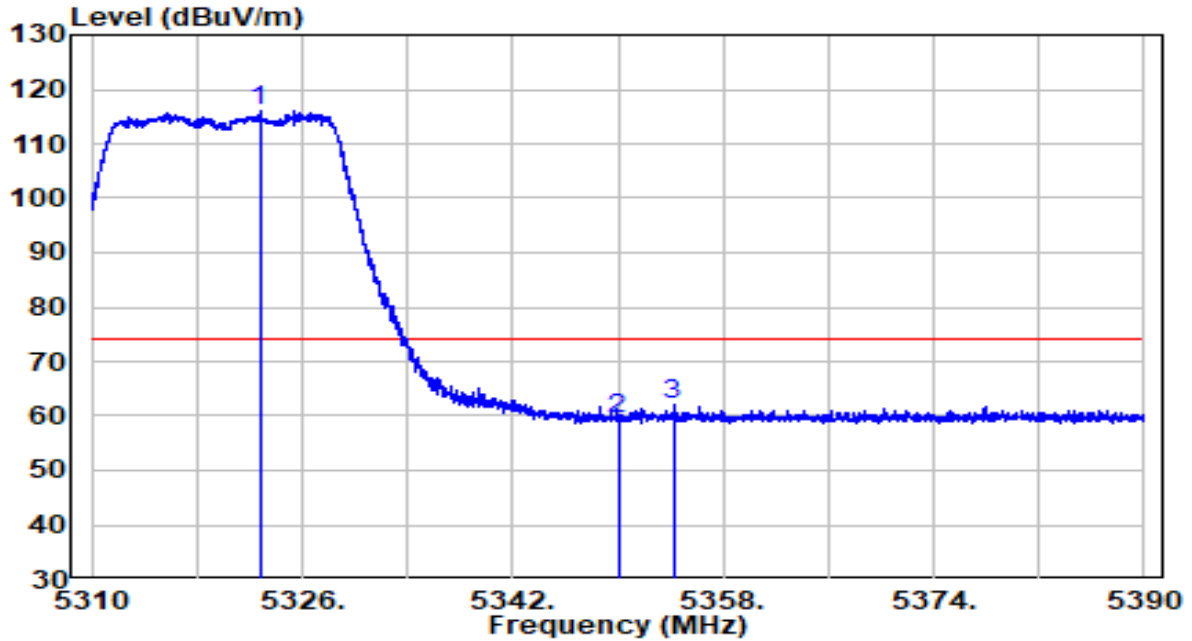


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5322.760	95.61	20.48	116.09	N/A	N/A	Peak
2	5350.000	38.86	20.52	59.38	-14.62	74.00	Peak
3	5354.200	41.63	20.53	62.17	-11.83	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	By PoE

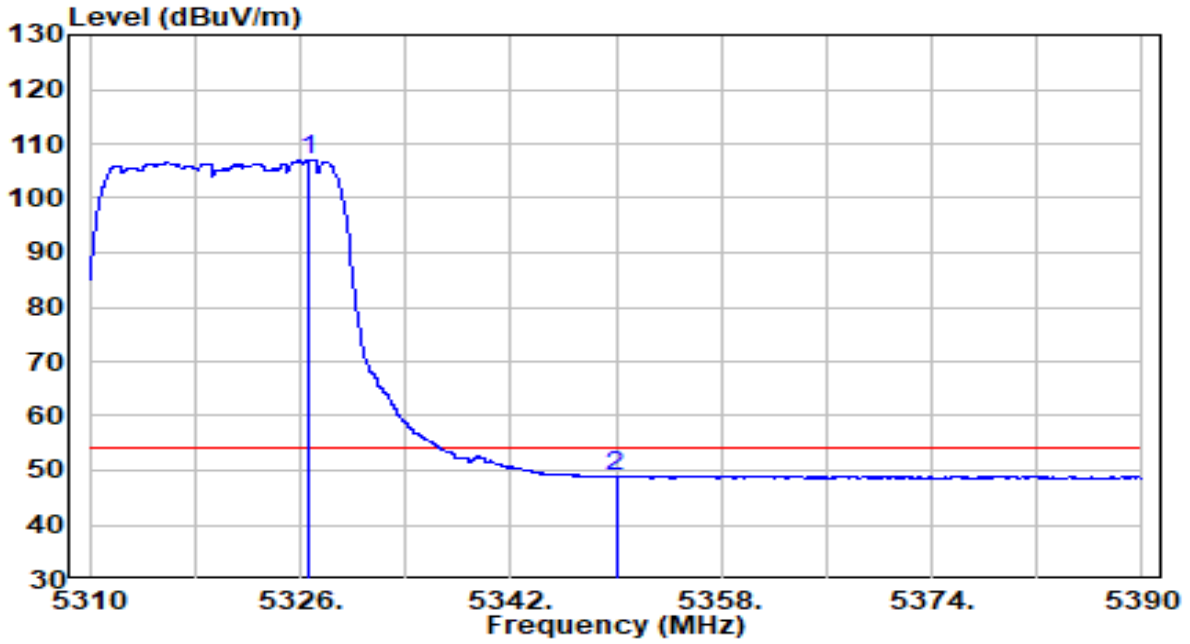


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5326.720	86.68	20.49	107.17	N/A	N/A	Average
2	5350.000	28.28	20.52	48.81	-5.19	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	By PoE

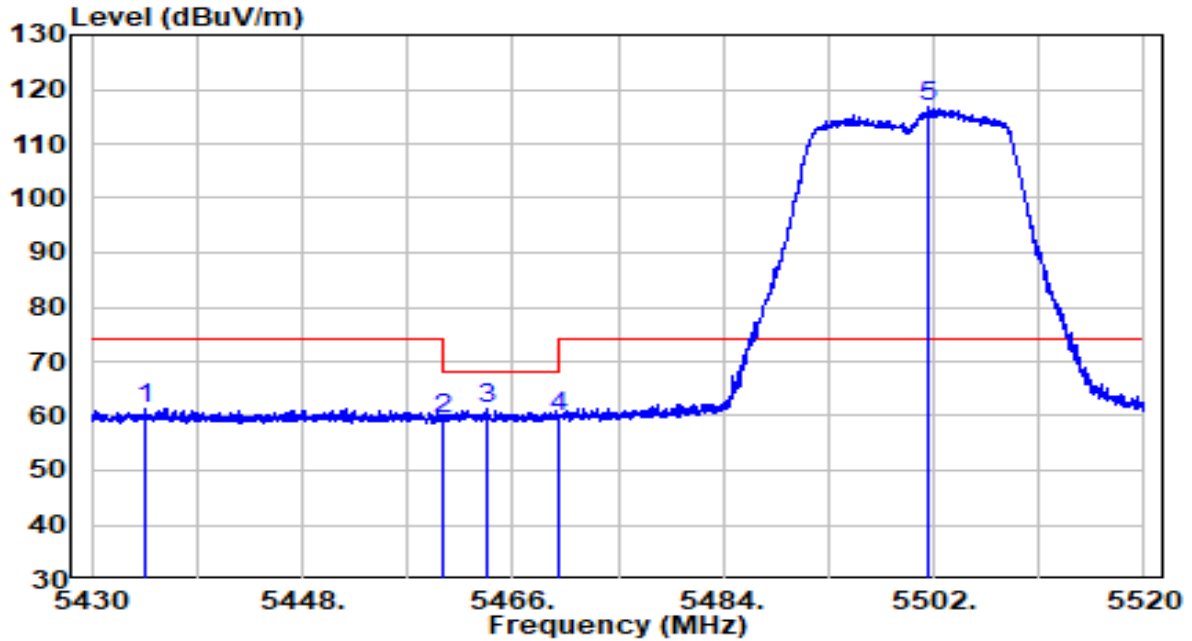


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5434.680	40.83	20.66	61.49	-12.51	74.00	Peak
2	5460.000	38.91	20.70	59.61	-8.59	68.20	Peak
3	5463.885	40.53	20.71	61.24	-6.96	68.20	Peak
4	5470.000	39.17	20.72	59.89	-8.31	68.20	Peak
5	* 5501.595	95.97	20.78	116.75	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	By PoE

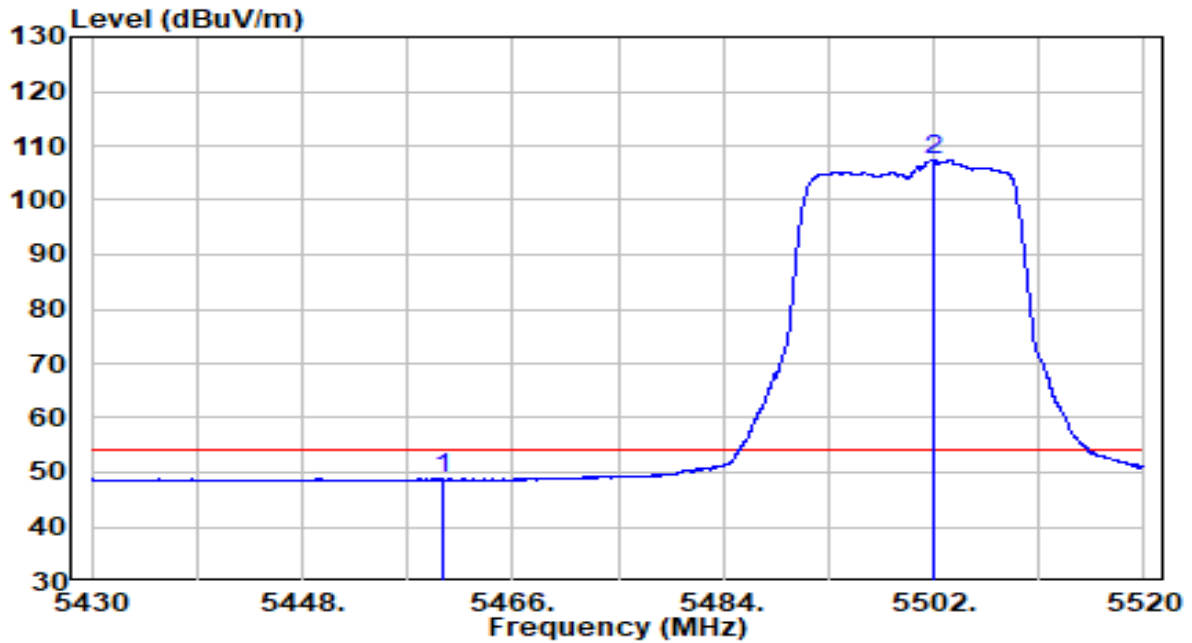


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5460.000	27.98	20.70	48.68	-5.32	54.00	Average
2	* 5502.000	86.61	20.78	107.38	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	By PoE

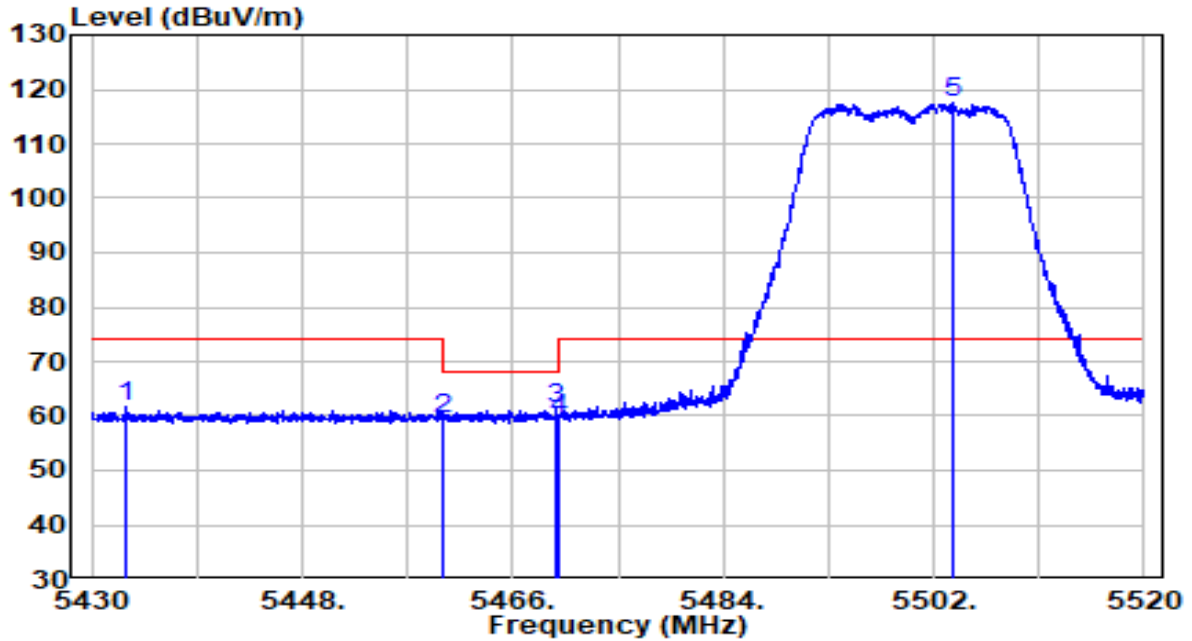


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5432.970	41.05	20.66	61.71	-12.29	74.00	Peak
2	5460.000	38.77	20.70	59.48	-8.72	68.20	Peak
3	5469.645	40.51	20.72	61.23	-6.97	68.20	Peak
4	5470.000	38.72	20.72	59.45	-8.75	68.20	Peak
5	* 5503.755	96.76	20.78	117.55	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	By PoE

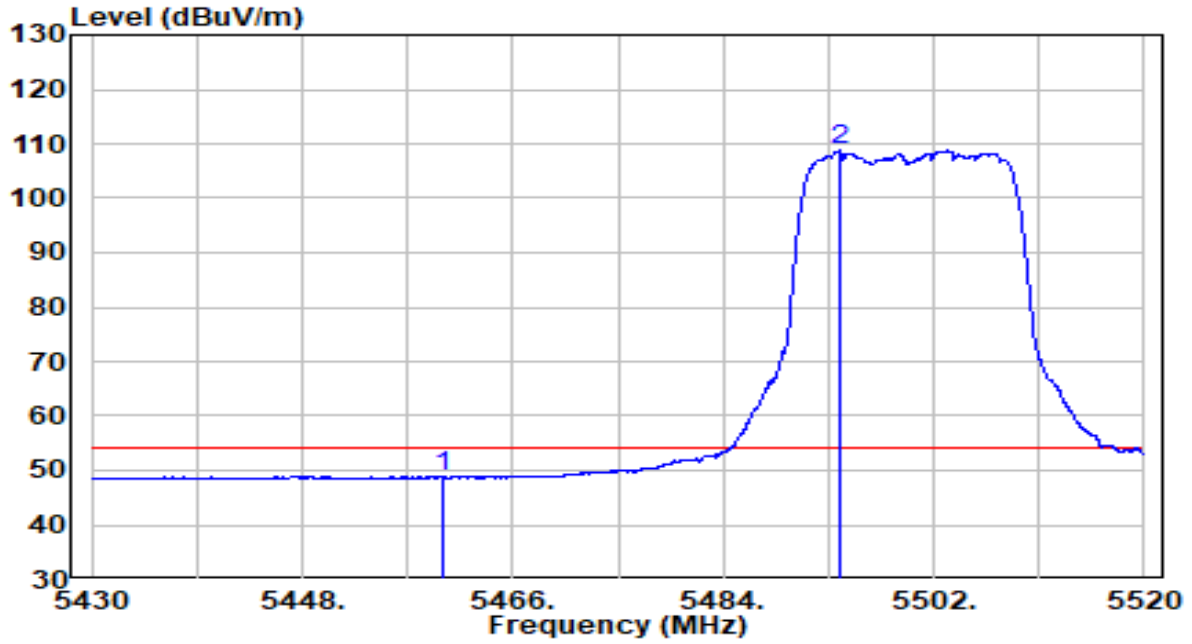


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5460.000	28.06	20.70	48.76	-5.24	54.00	Average
2	* 5494.080	87.98	20.76	108.74	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5700MHz	Test Voltage	By PoE

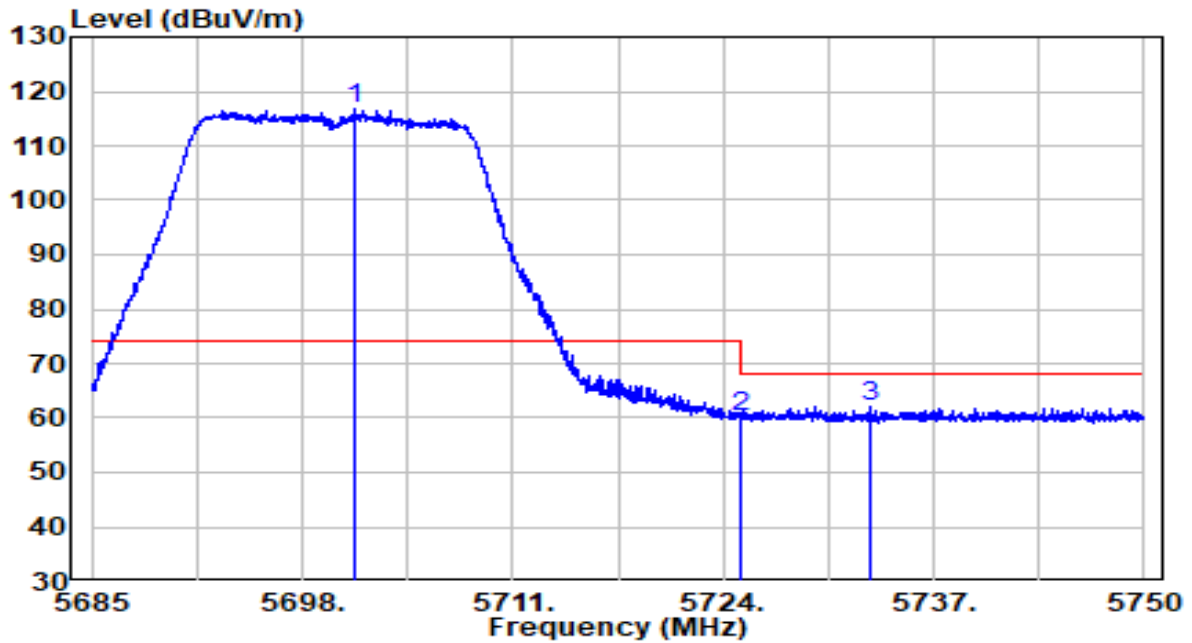


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5701.185	95.44	21.50	116.94	N/A	N/A	Peak
2	5725.000	38.42	21.59	60.01	-8.19	68.20	Peak
3	5733.165	40.31	21.62	61.93	-6.27	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5700MHz	Test Voltage	By PoE

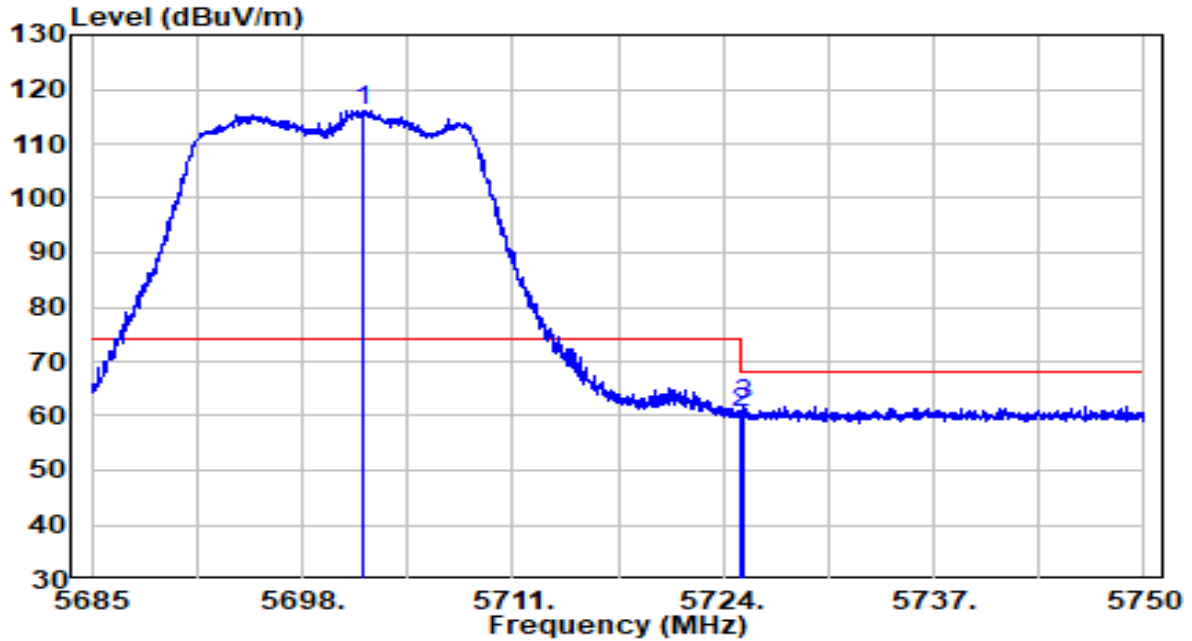


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	*	94.61	21.50	116.11	N/A	N/A	Peak
2	5725.000	38.90	21.59	60.49	-7.71	68.20	Peak
3	5725.235	40.33	21.59	61.92	-6.28	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5745MHz	Test Voltage	By PoE

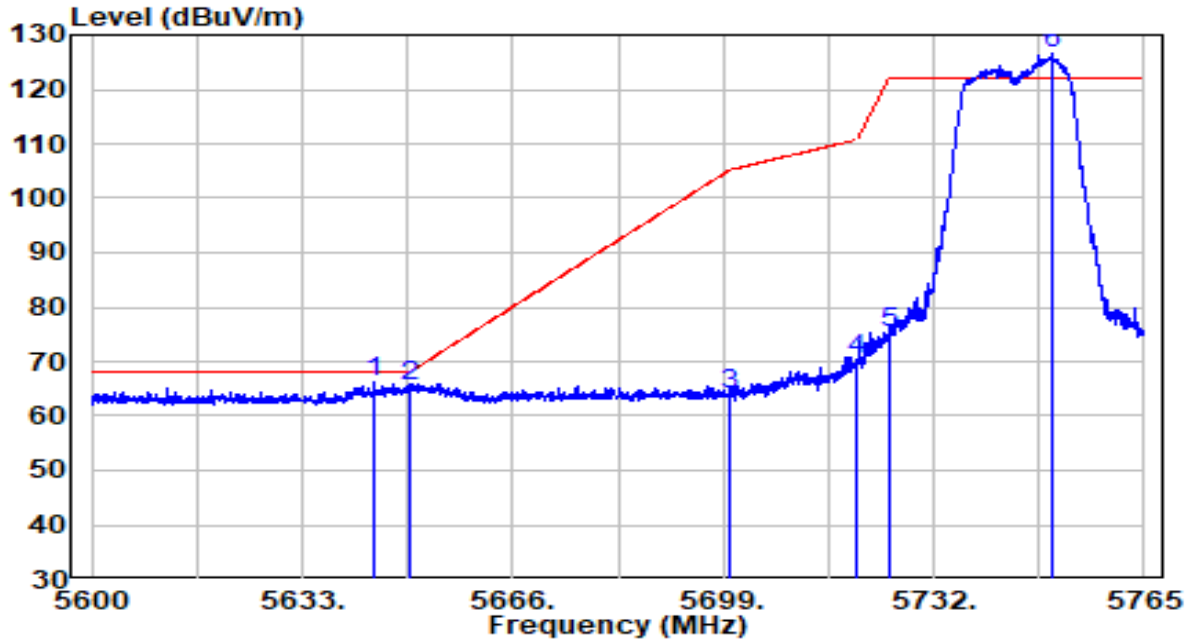


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5644.303	44.82	21.30	66.12	-2.08	68.20	Peak
2	5650.000	43.99	21.32	65.31	-2.89	68.20	Peak
3	5700.000	42.28	21.50	63.77	-41.43	105.20	Peak
4	5720.000	48.74	21.57	70.31	-40.49	110.80	Peak
5	5725.000	53.73	21.59	75.32	-46.88	122.20	Peak
6	* 5750.645	104.97	21.68	126.65	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5745MHz	Test Voltage	By PoE

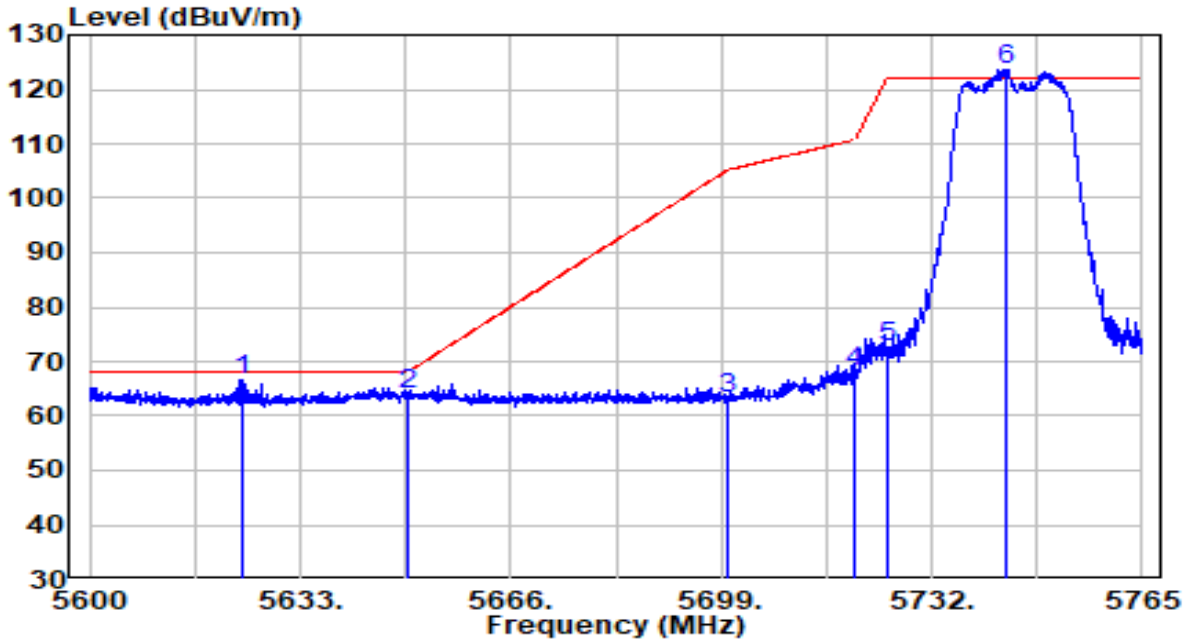


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5623.925	45.37	21.22	66.59	-1.61	68.20	Peak
2	5650.000	42.63	21.32	63.94	-4.26	68.20	Peak
3	5700.000	41.76	21.50	63.26	-41.94	105.20	Peak
4	5720.000	46.46	21.57	68.03	-42.77	110.80	Peak
5	5725.000	51.16	21.59	72.74	-49.46	122.20	Peak
6	* 5743.632	101.90	21.66	123.55	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5825MHz	Test Voltage	By PoE

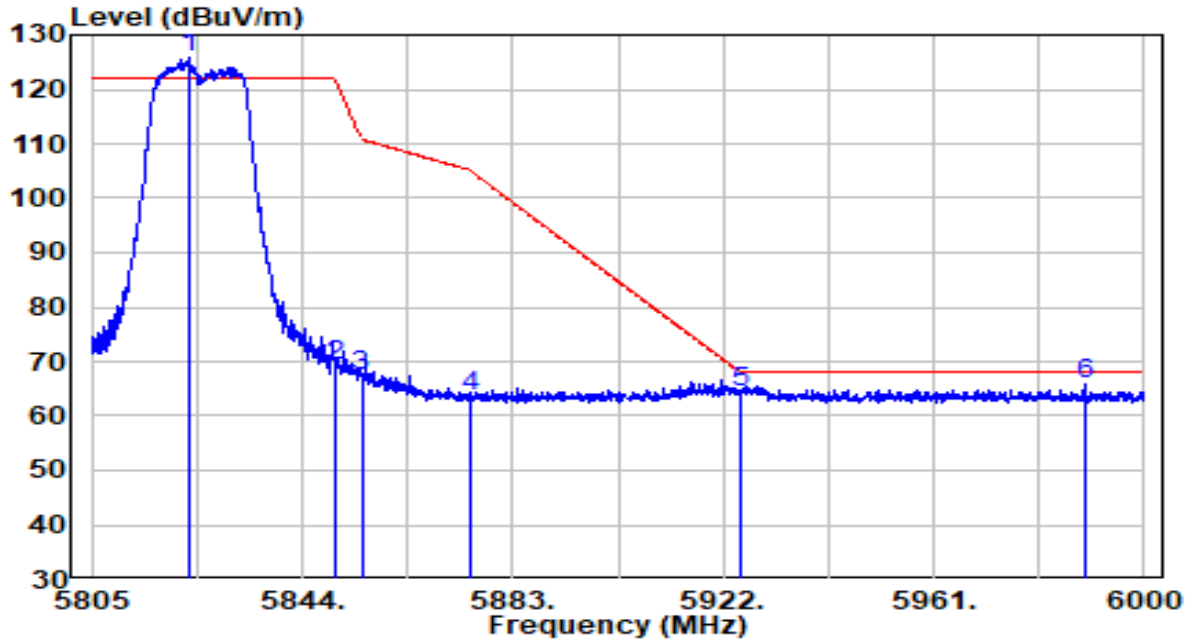


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5822.940	103.84	21.95	125.79	N/A	N/A	Peak
2	5850.000	47.07	22.04	69.12	-53.08	122.20	Peak
3	5855.000	45.26	22.06	67.32	-43.48	110.80	Peak
4	5875.000	41.38	22.14	63.51	-41.69	105.20	Peak
5	5925.000	42.00	22.32	64.32	-3.88	68.20	Peak
6	5988.982	43.18	22.55	65.73	-2.47	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5825MHz	Test Voltage	By PoE

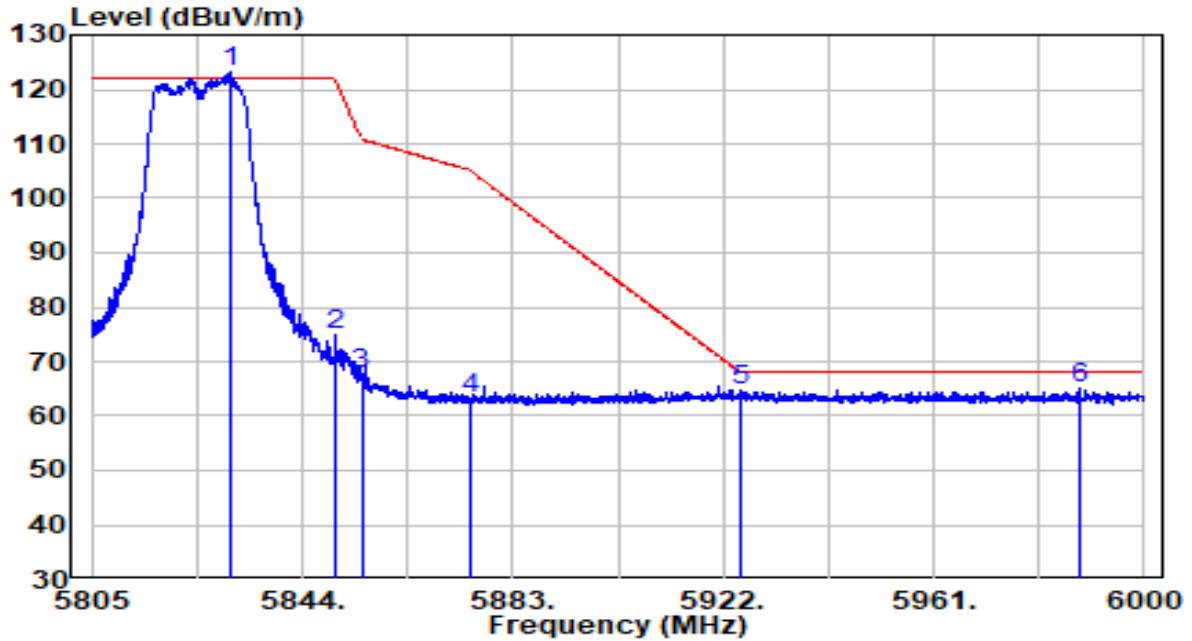


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5830.545	101.28	21.97	123.26	N/A	N/A	Peak
2	5850.000	53.03	22.04	75.08	-47.12	122.20	Peak
3	5855.000	45.50	22.06	67.56	-43.24	110.80	Peak
4	5875.000	40.89	22.14	63.03	-42.17	105.20	Peak
5	5925.000	42.42	22.32	64.74	-3.46	68.20	Peak
6	5987.910	42.38	22.55	64.93	-3.27	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	By PoE

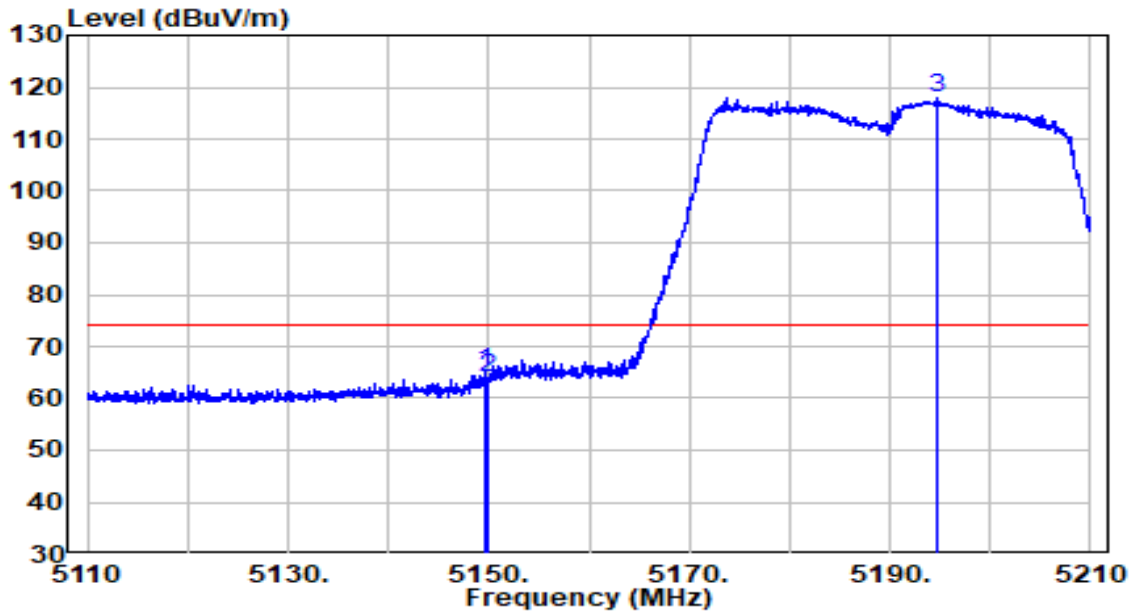


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5149.600	44.81	20.20	65.01	-8.99	74.00	Peak
2	5150.000	43.64	20.20	63.83	-10.17	74.00	Peak
3	* 5194.800	97.69	20.27	117.96	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	By PoE

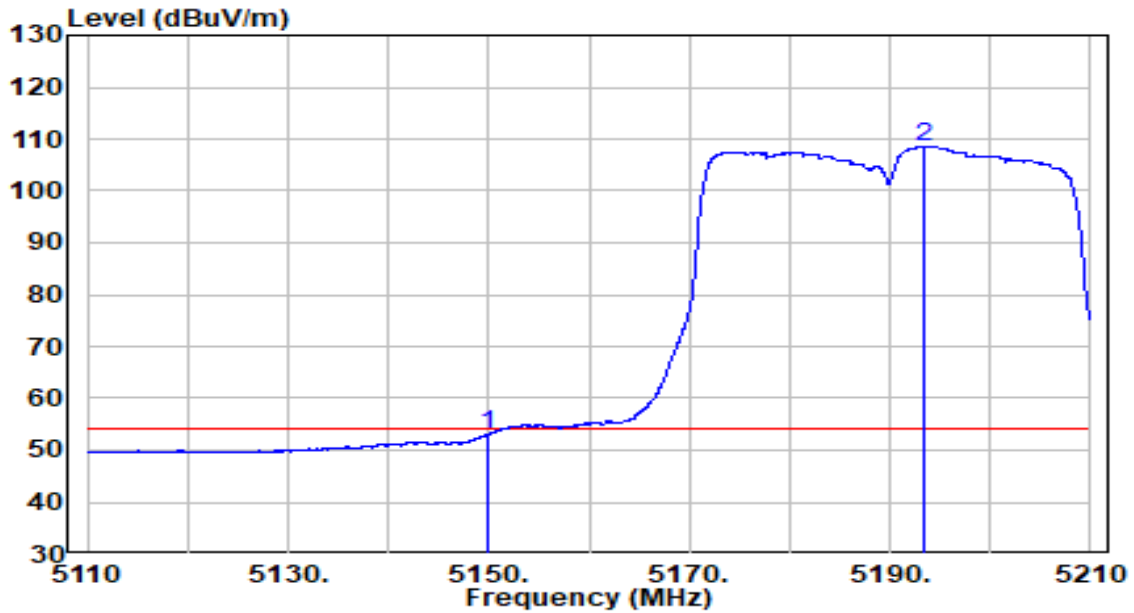


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5150.000	32.88	20.20	53.08	-0.92	54.00	Average
2	* 5193.300	88.28	20.27	108.55	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	By PoE

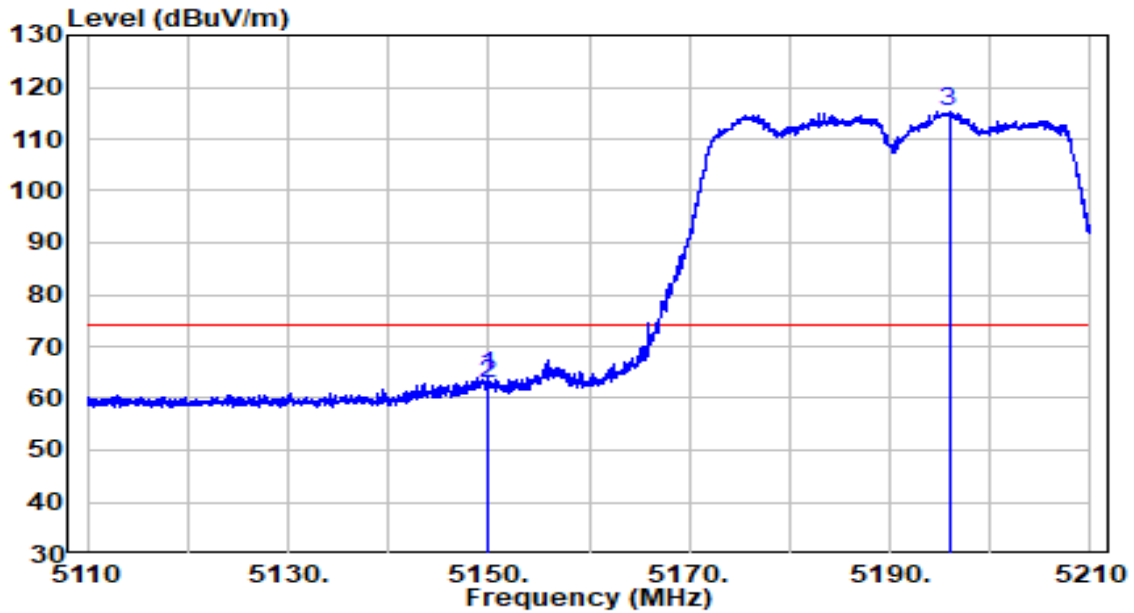


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5149.850	44.05	20.20	64.25	-9.75	74.00	Peak
2	5150.000	42.78	20.20	62.98	-11.02	74.00	Peak
3	* 5195.900	94.99	20.27	115.26	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	By PoE

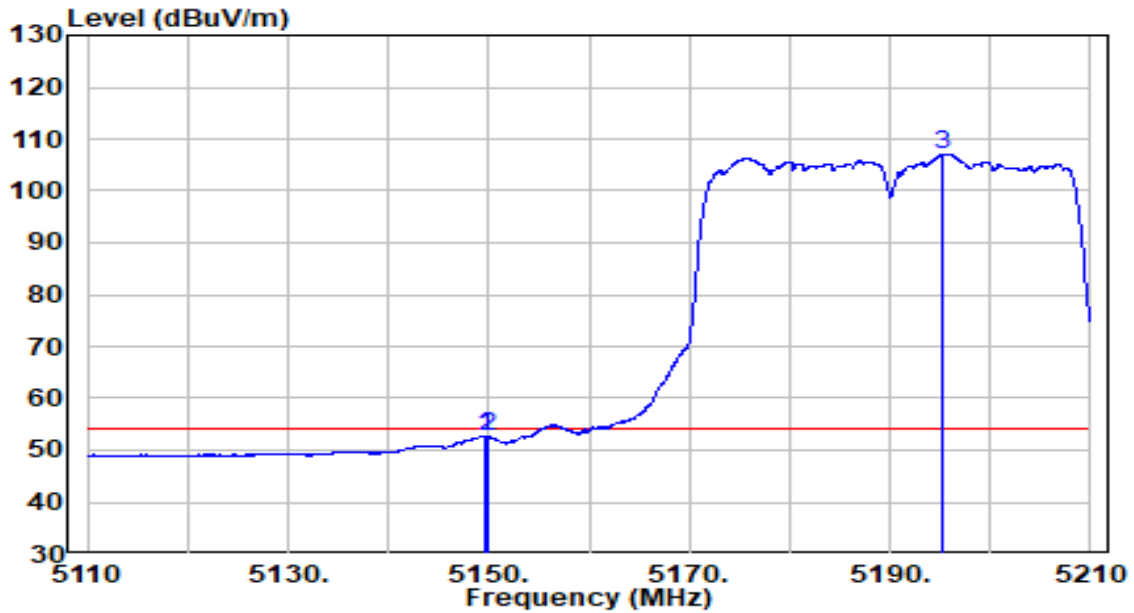


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5149.550	32.44	20.20	52.63	-1.37	54.00	Average
2	5150.000	32.41	20.20	52.61	-1.39	54.00	Average
3	* 5195.350	86.88	20.27	107.15	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	By PoE

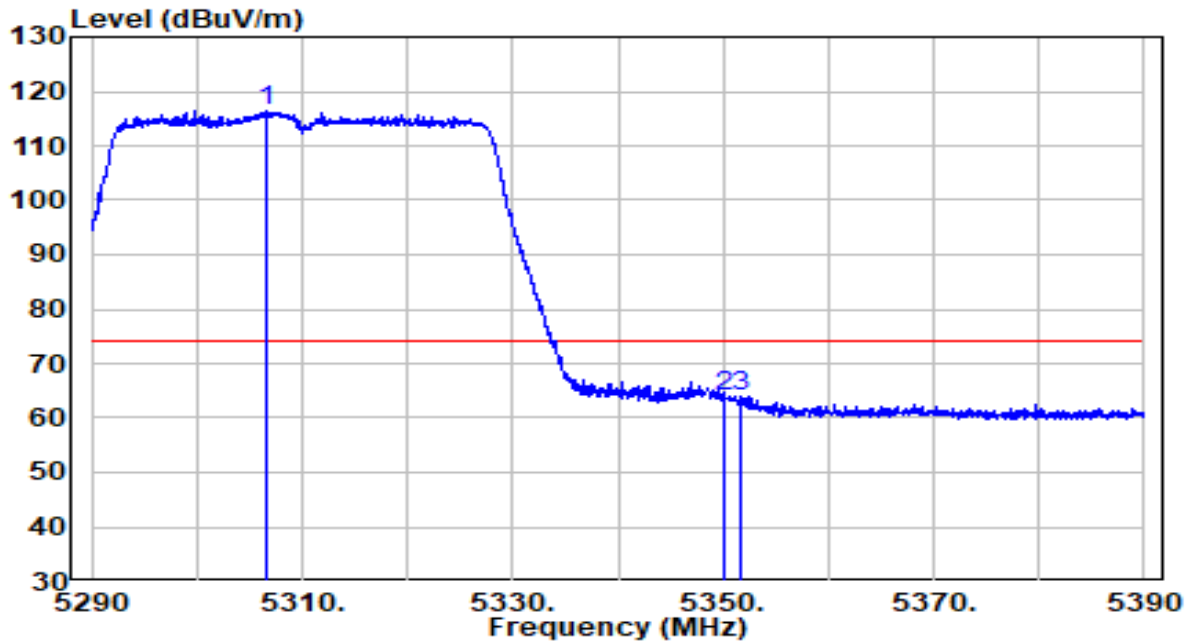


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5306.500	95.92	20.45	116.37	N/A	N/A	Peak
2	5350.000	43.40	20.52	63.93	-10.07	74.00	Peak
3	5351.750	43.60	20.53	64.12	-9.88	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	By PoE

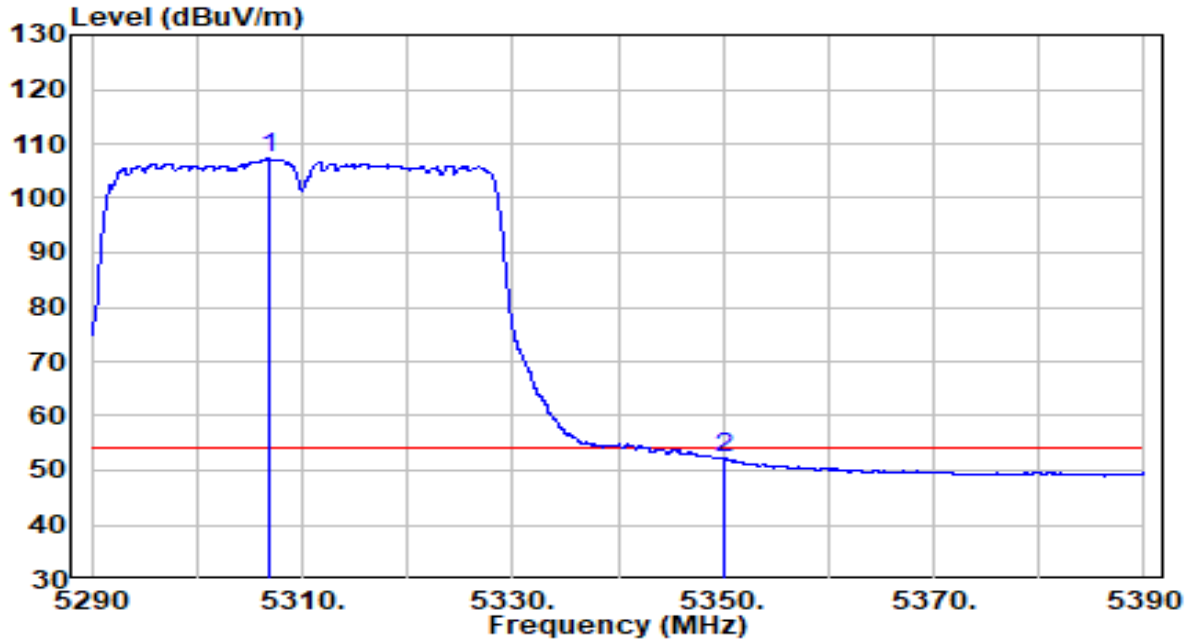


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	* 5306.750	86.77	20.45	107.23	N/A	N/A	Average
2	5350.000	31.58	20.52	52.10	-1.90	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	By PoE

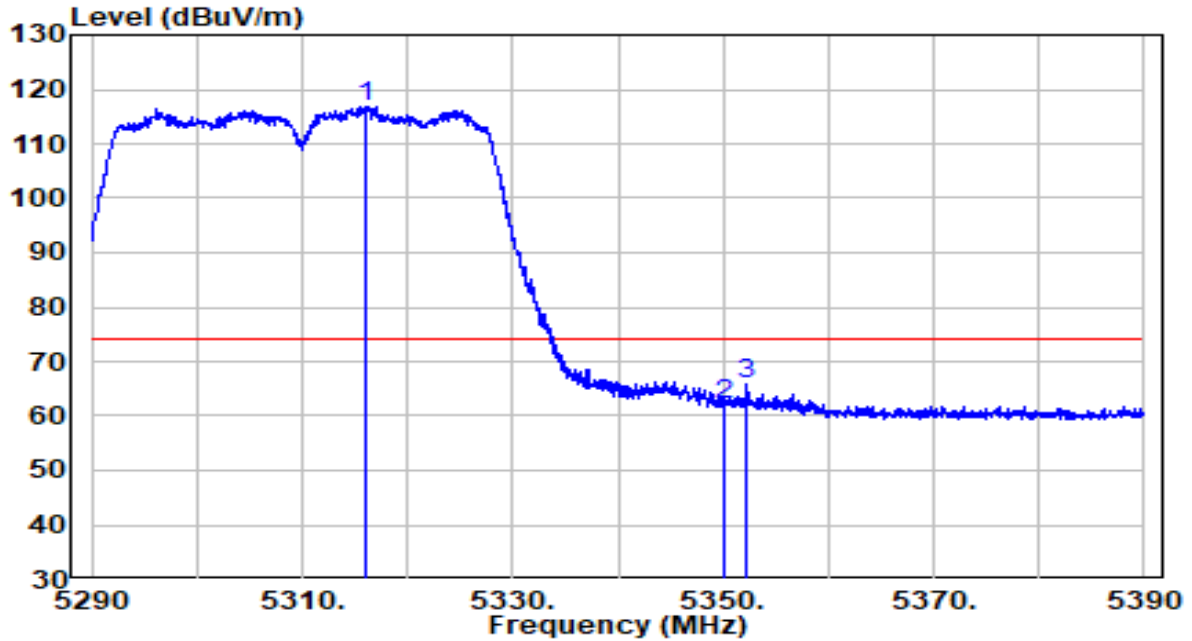


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5316.100	96.43	20.47	116.90	N/A	N/A	Peak
2	5350.000	41.69	20.52	62.21	-11.79	74.00	Peak
3	5352.150	45.14	20.53	65.66	-8.34	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	By PoE

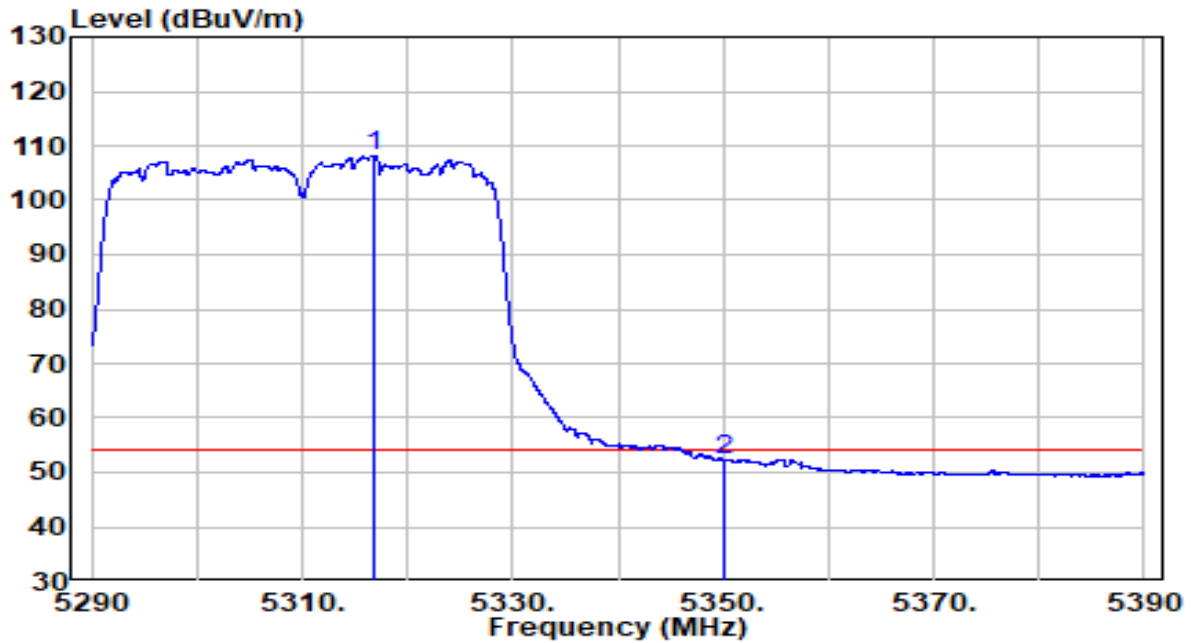


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5316.700	87.63	20.47	108.09	N/A	N/A	Average
2	5350.000	31.77	20.52	52.30	-1.70	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	By PoE

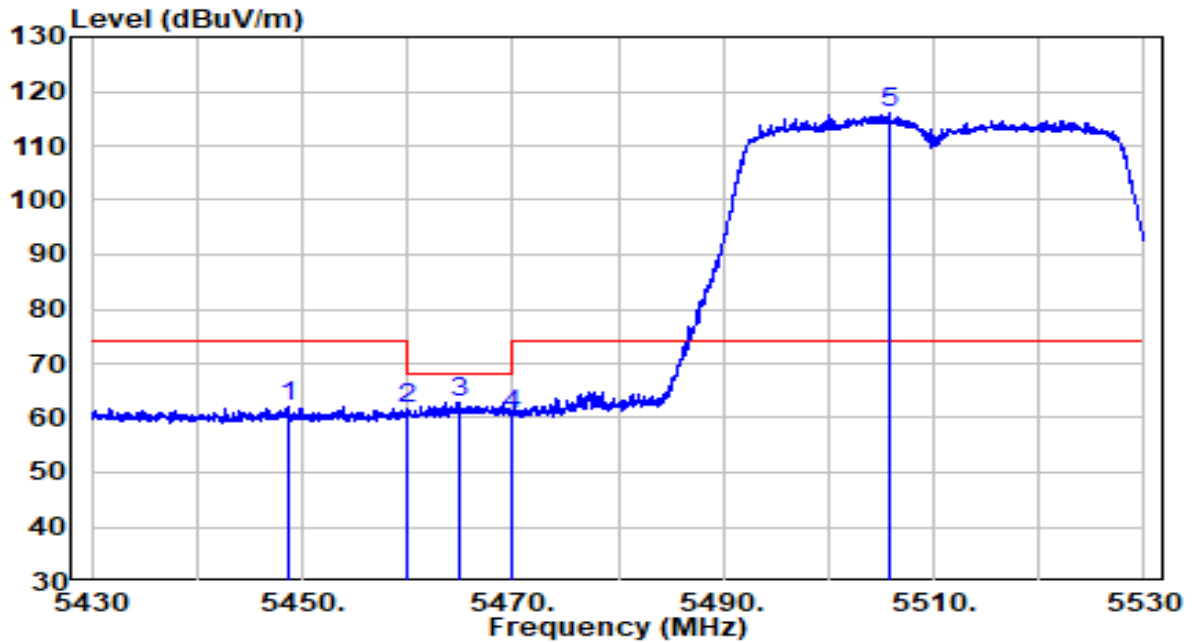


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5448.700	41.39	20.69	62.08	-11.92	74.00	Peak
2	5460.000	40.95	20.70	61.65	-6.55	68.20	Peak
3	5464.900	42.27	20.71	62.98	-5.22	68.20	Peak
4	5470.000	39.91	20.72	60.63	-7.57	68.20	Peak
5	* 5505.750	95.32	20.79	116.11	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	By PoE

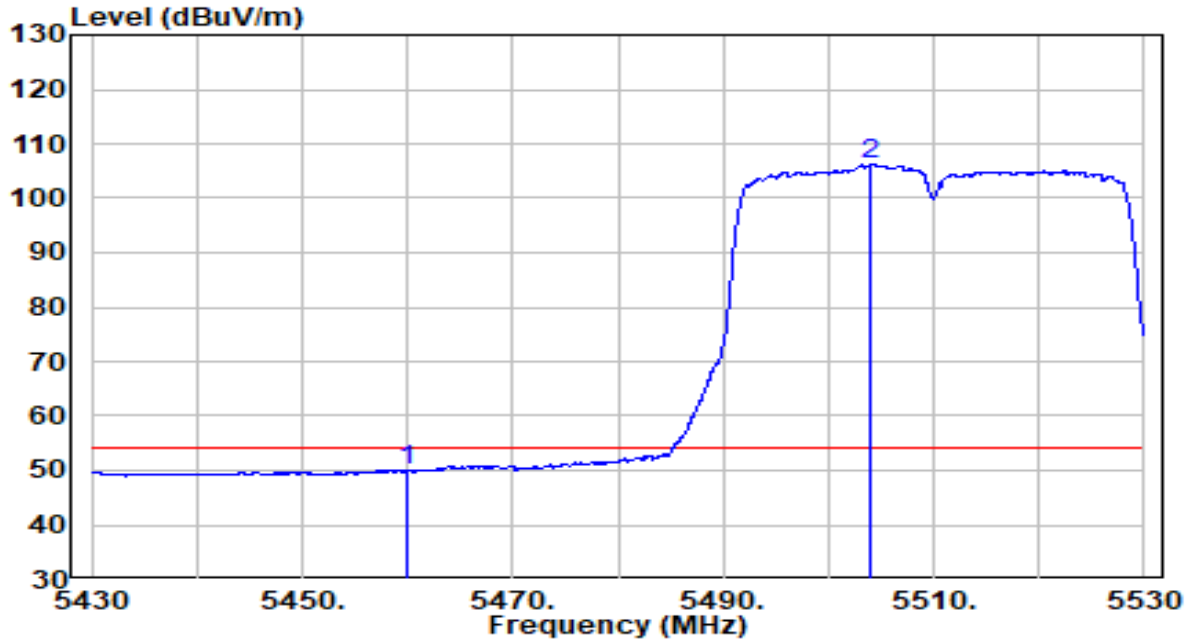


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5460.000	29.13	20.70	49.84	-4.16	54.00	Average
2	* 5504.100	85.37	20.78	106.15	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	By PoE

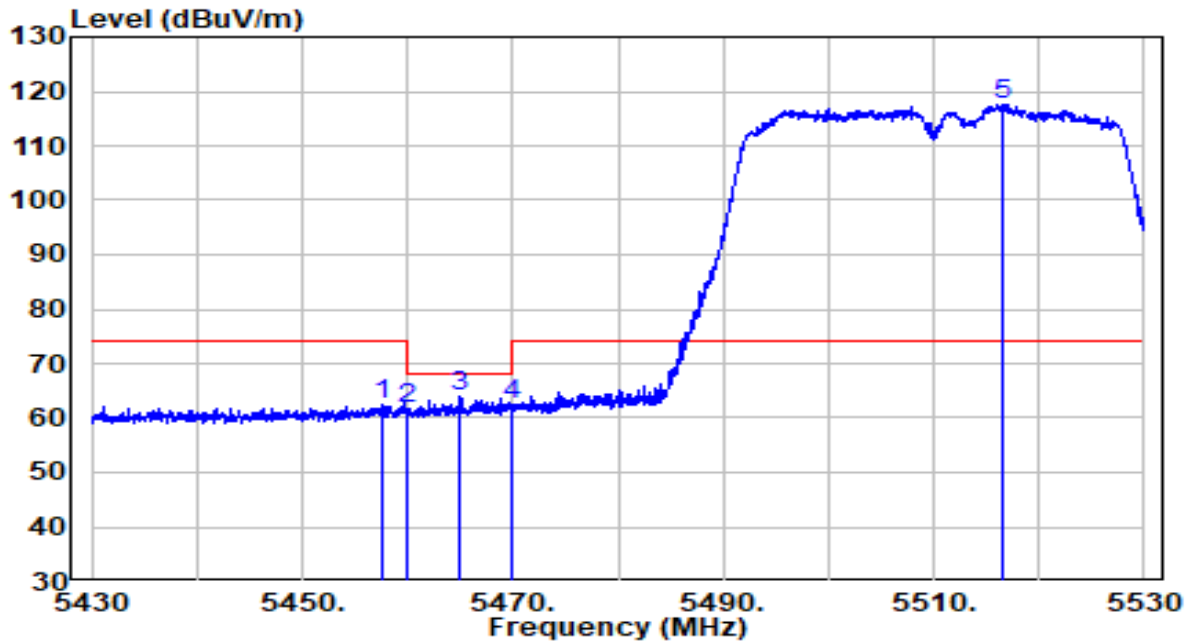


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5457.700	41.83	20.70	62.53	-11.47	74.00	Peak
2	5460.000	40.99	20.70	61.70	-6.50	68.20	Peak
3	5464.950	43.12	20.71	63.84	-4.36	68.20	Peak
4	5470.000	41.71	20.72	62.43	-5.77	68.20	Peak
5	* 5516.600	96.85	20.83	117.68	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	By PoE

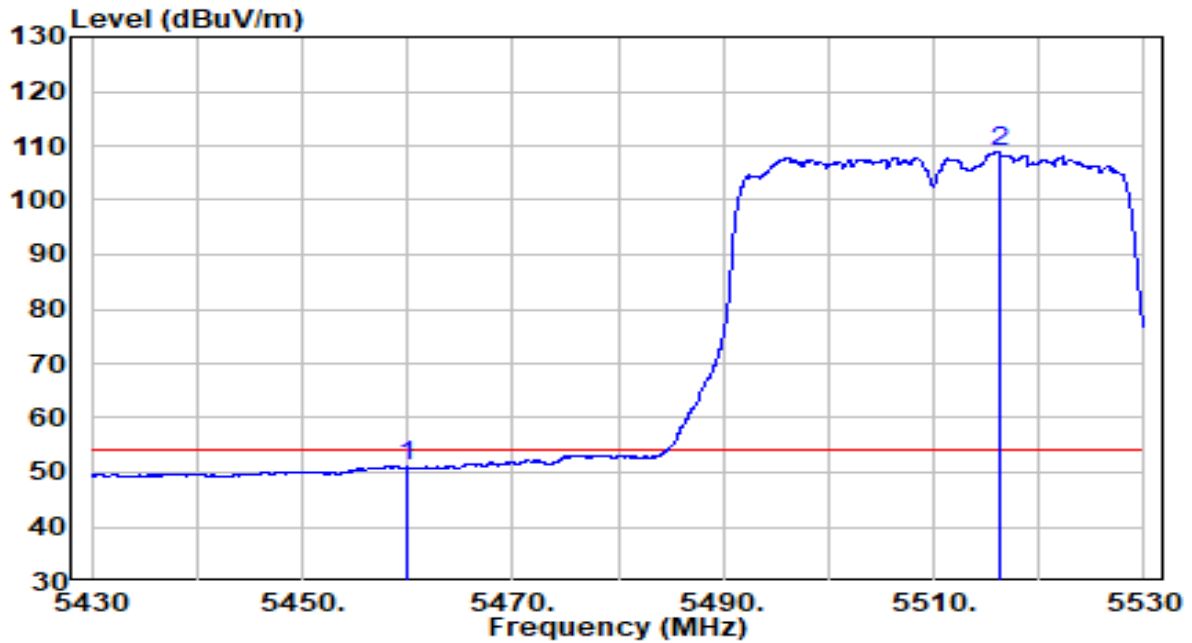


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	5460.000	30.26	20.70	50.97	-3.03	54.00	Average
2	* 5516.200	88.17	20.83	109.00	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5670MHz	Test Voltage	By PoE

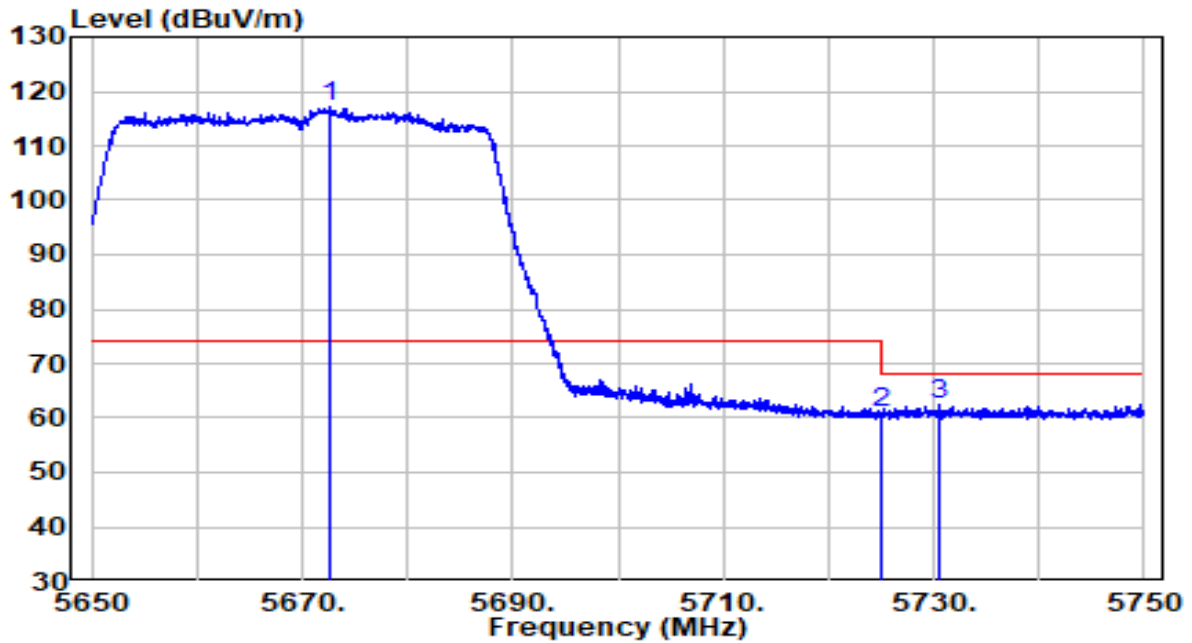


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)	
1	*	5672.700	95.60	21.40	117.00	N/A	N/A	Peak
2		5725.000	39.21	21.59	60.80	-7.40	68.20	Peak
3		5730.450	40.91	21.61	62.51	-5.69	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5670MHz	Test Voltage	By PoE

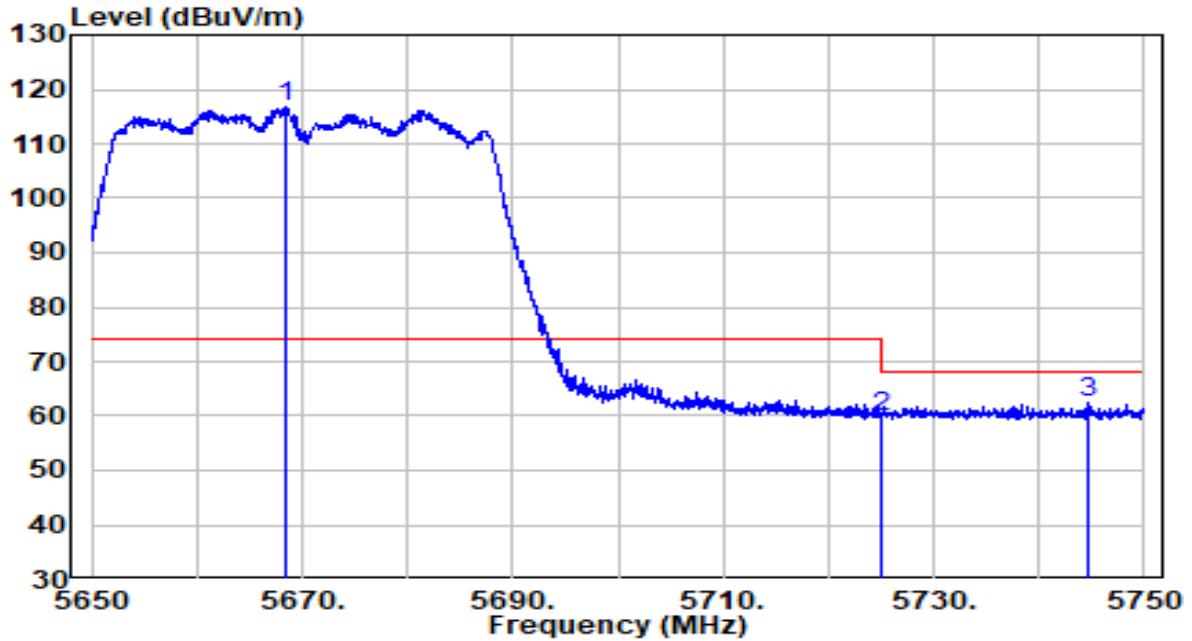


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)	
1	*	5668.450	95.23	21.38	116.62	N/A	N/A	Peak
2		5725.000	38.04	21.59	59.63	-8.57	68.20	Peak
3		5744.550	40.70	21.66	62.36	-5.84	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	By PoE

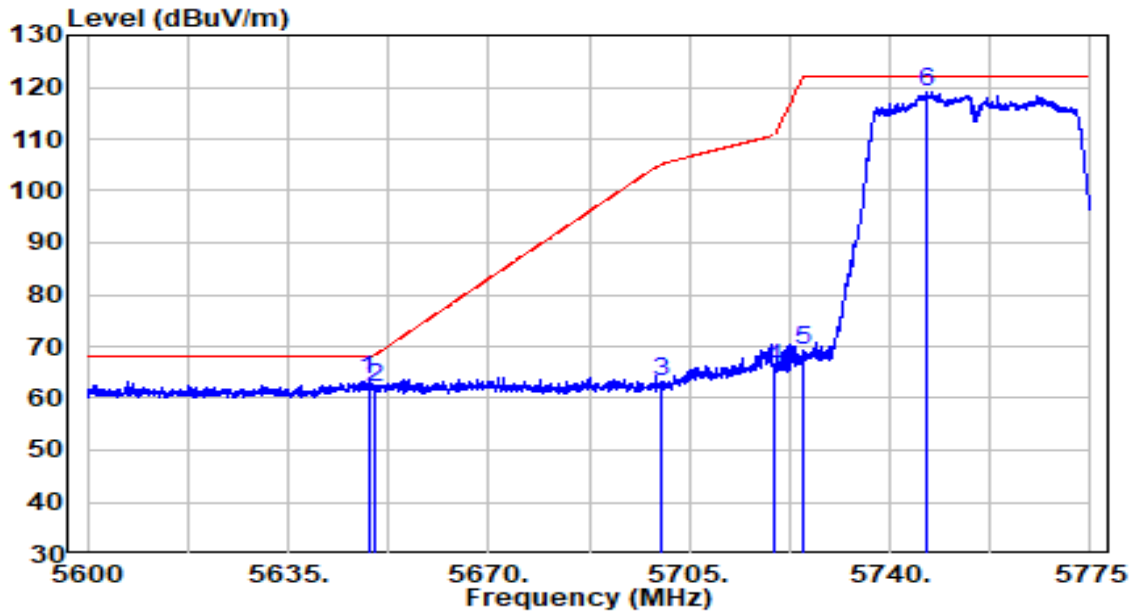


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5649.000	42.11	21.31	63.42	-4.78	68.20	Peak
2	5650.000	40.63	21.32	61.95	-6.25	68.20	Peak
3	5700.000	41.84	21.50	63.34	-41.86	105.20	Peak
4	5720.000	44.38	21.57	65.95	-44.85	110.80	Peak
5	5725.000	47.70	21.59	69.29	-52.91	122.20	Peak
6	* 5746.388	97.43	21.67	119.09	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	By PoE

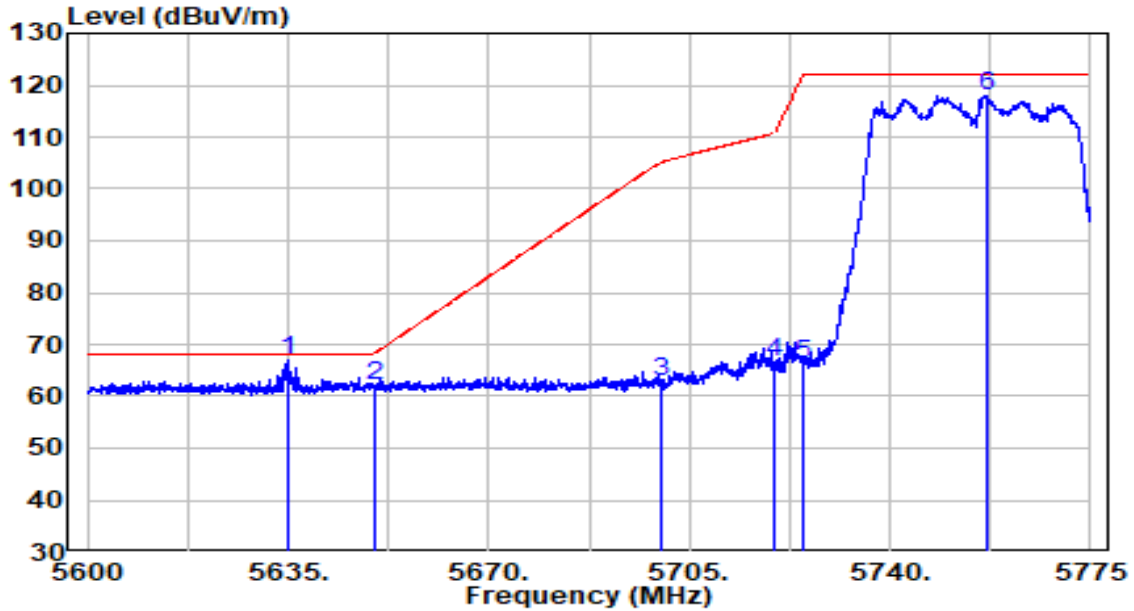


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5635.175	45.75	21.26	67.01	-1.19	68.20	Peak
2	5650.000	40.73	21.32	62.05	-6.15	68.20	Peak
3	5700.000	41.15	21.50	62.65	-42.55	105.20	Peak
4	5720.000	44.87	21.57	66.44	-44.36	110.80	Peak
5	5725.000	44.51	21.59	66.10	-56.10	122.20	Peak
6	5756.800	96.32	21.70	118.03	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5795MHz	Test Voltage	By PoE

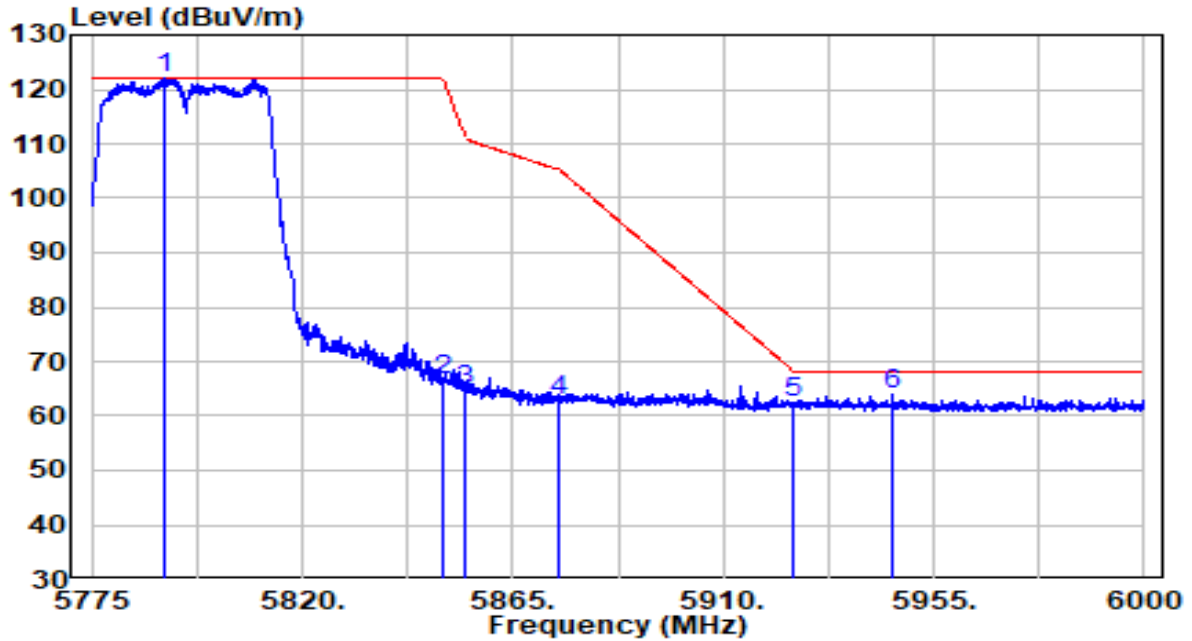


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5790.413	100.23	21.83	122.05	N/A	N/A	Peak
2	5850.000	44.51	22.04	66.56	-55.64	122.20	Peak
3	5855.000	42.63	22.06	64.70	-46.10	110.80	Peak
4	5875.000	40.60	22.14	62.73	-42.47	105.20	Peak
5	5925.000	40.10	22.32	62.42	-5.78	68.20	Peak
6	5946.337	41.40	22.39	63.79	-4.41	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5795MHz	Test Voltage	By PoE

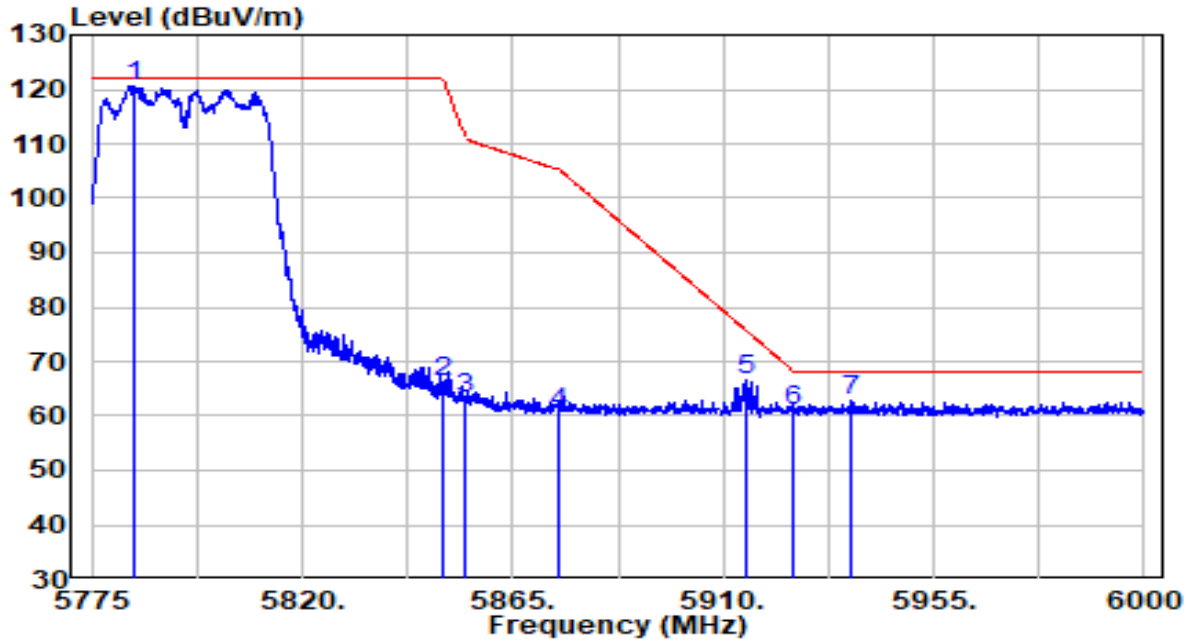


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	* 5783.888	98.64	21.80	120.44	N/A	N/A	Peak
2	5850.000	44.28	22.04	66.32	-55.88	122.20	Peak
3	5854.987	41.24	22.06	63.30	-47.53	110.83	Peak
4	5875.000	38.57	22.14	60.70	-44.50	105.20	Peak
5	5915.063	44.25	22.28	66.53	-9.00	75.53	Peak
6	5925.000	38.65	22.32	60.97	-7.23	68.20	Peak
7	5937.450	40.42	22.36	62.78	-5.42	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	By PoE

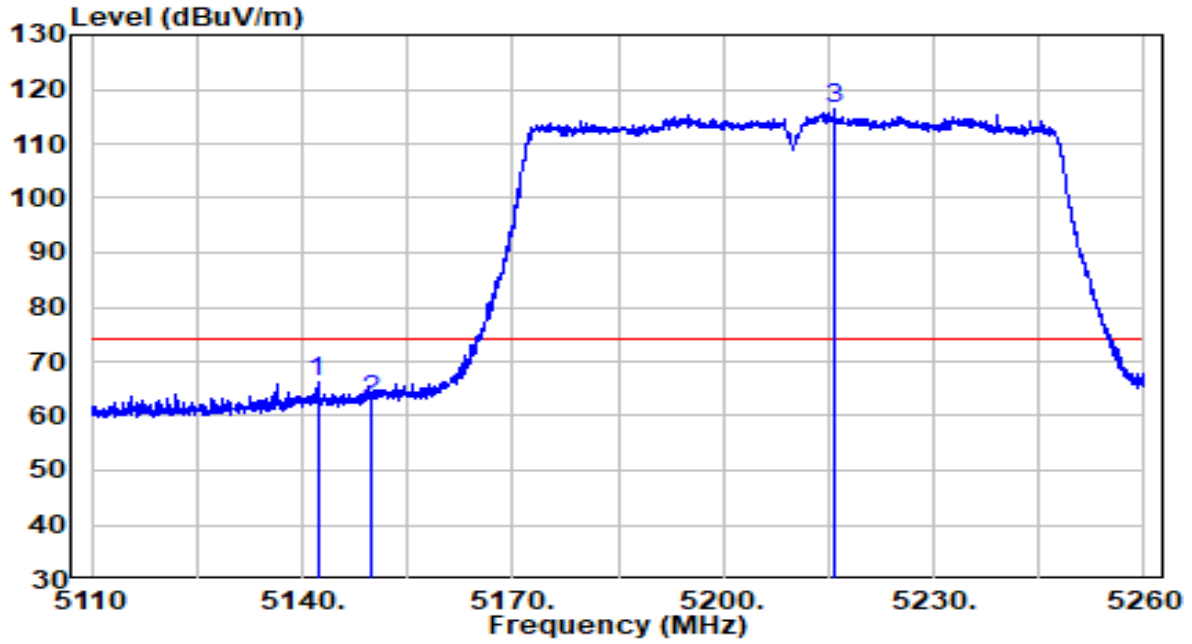


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5142.175	45.95	20.18	66.13	-7.87	74.00	Peak
2	5150.000	42.69	20.20	62.89	-11.11	74.00	Peak
3	* 5215.900	96.00	20.30	116.31	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	By PoE

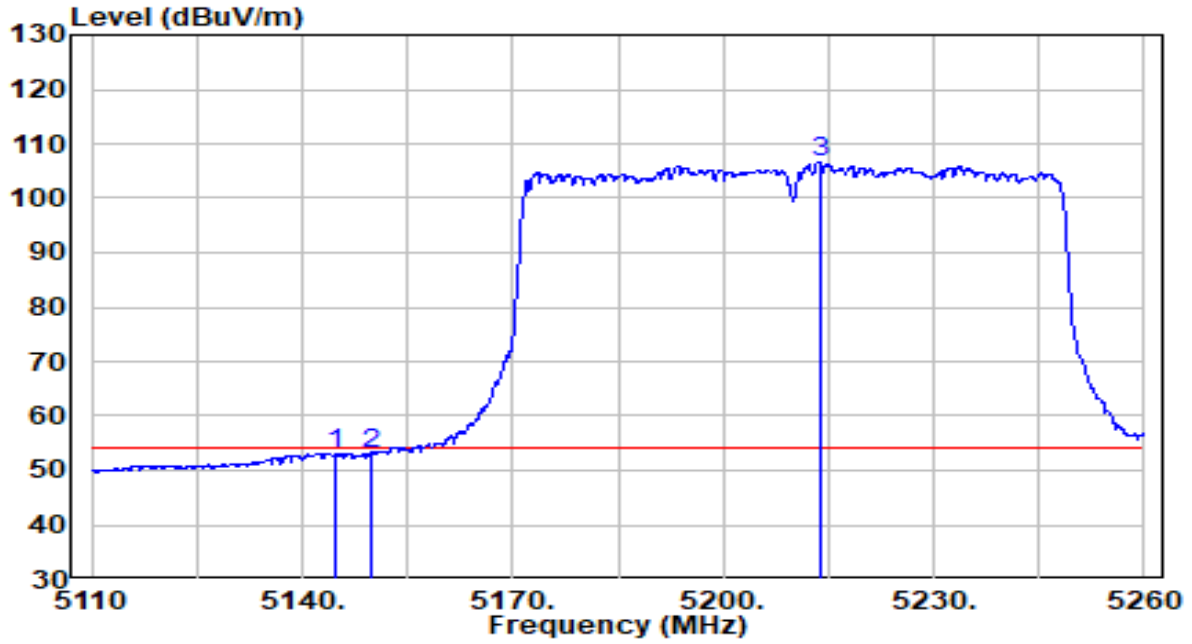


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5144.875	32.92	20.19	53.11	-0.89	54.00	Average
2	5150.000	32.96	20.20	53.15	-0.85	54.00	Average
3	* 5213.800	86.33	20.30	106.63	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	By PoE

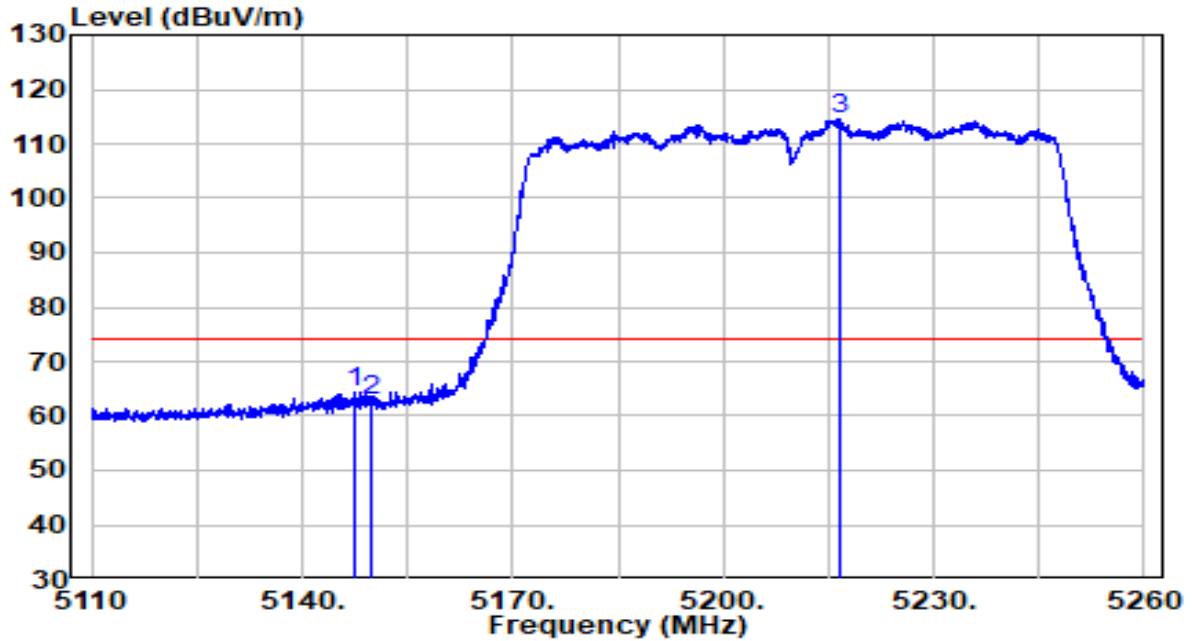


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5147.575	44.31	20.19	64.50	-9.50	74.00	Peak
2	5150.000	42.55	20.20	62.75	-11.25	74.00	Peak
3	* 5216.500	94.32	20.31	114.62	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	By PoE

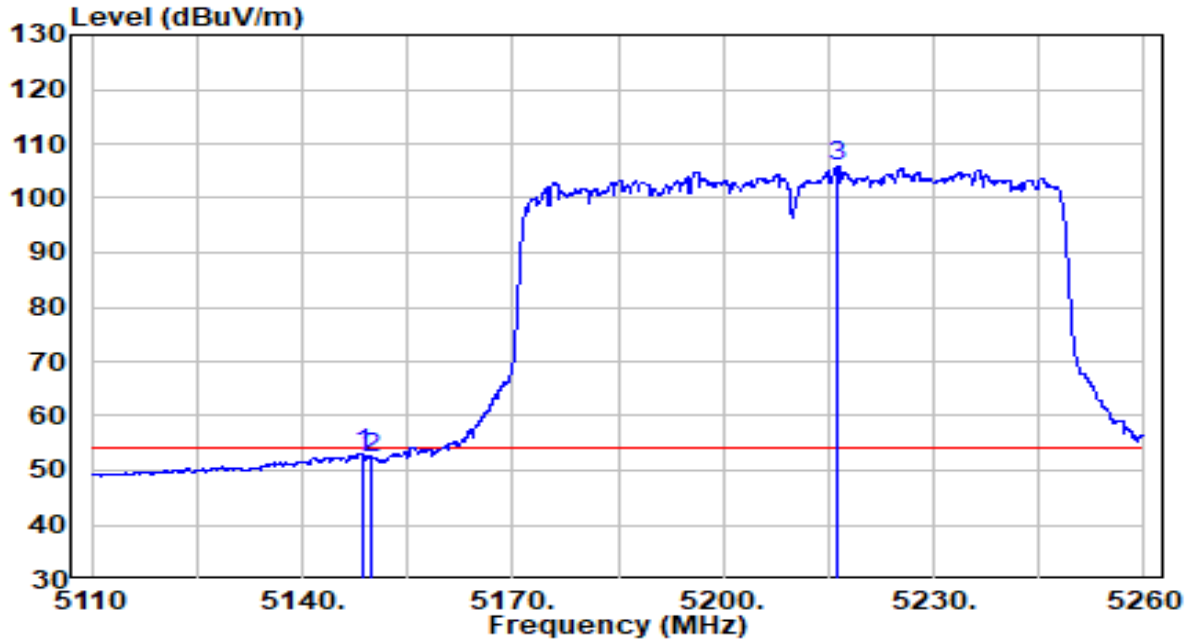


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5148.700	32.92	20.19	53.12	-0.88	54.00	Average
2	5150.000	32.03	20.20	52.23	-1.77	54.00	Average
3	* 5216.350	85.62	20.30	105.93	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	By PoE

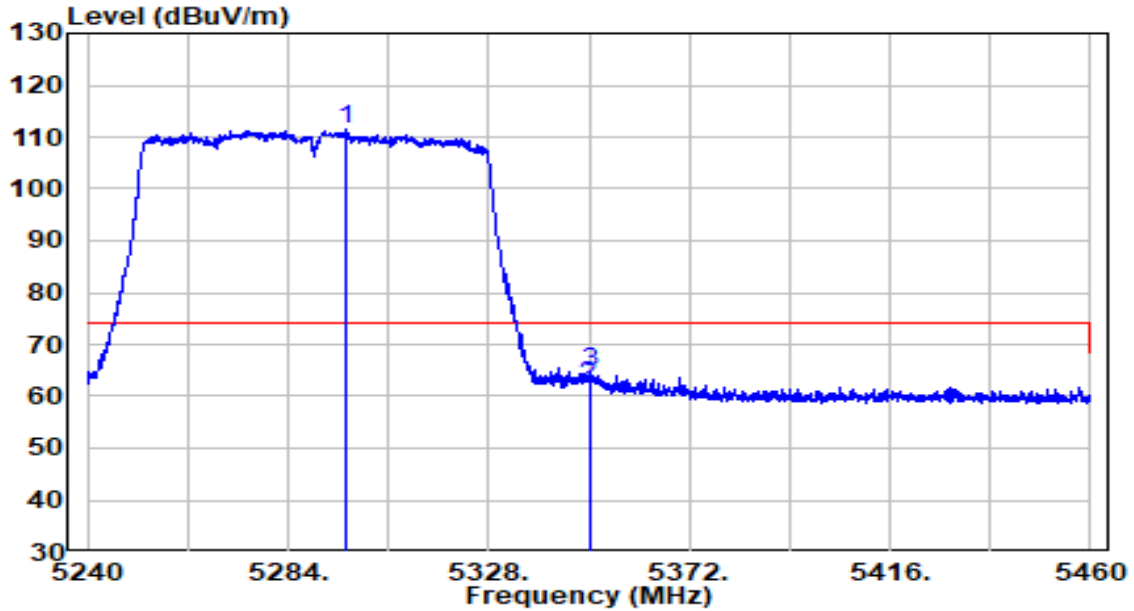


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5296.760	91.21	20.44	111.65	N/A	N/A	Peak
2	5350.000	41.65	20.52	62.18	-11.82	74.00	Peak
3	5350.440	44.12	20.52	64.64	-9.36	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	By PoE

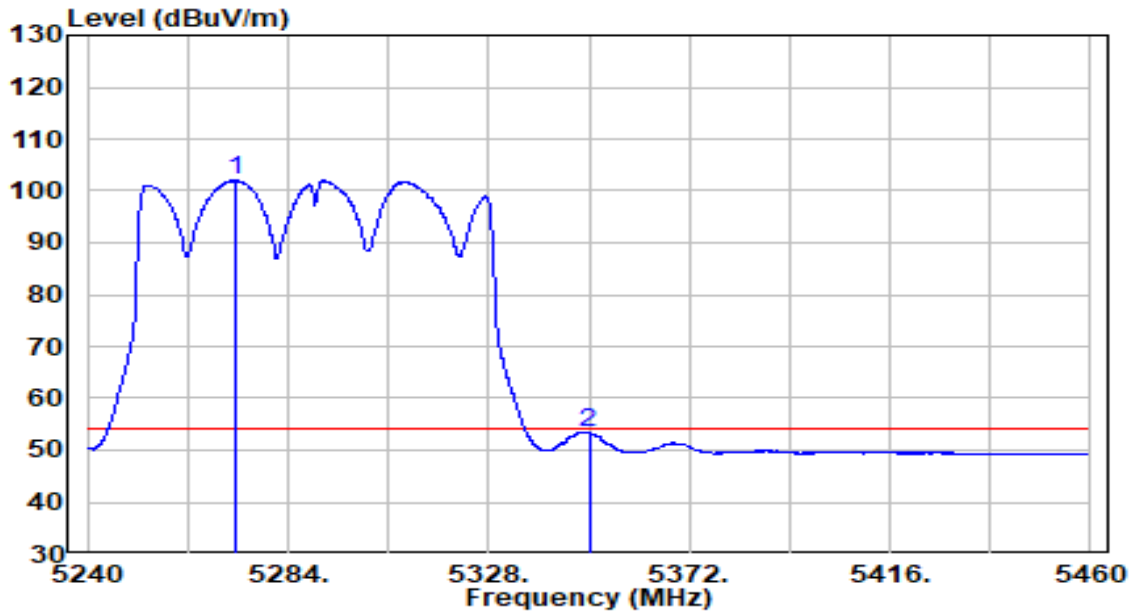


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	* 5272.560	81.63	20.40	102.03	N/A	N/A	Average
2	5350.000	32.73	20.52	53.25	-0.75	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	By PoE

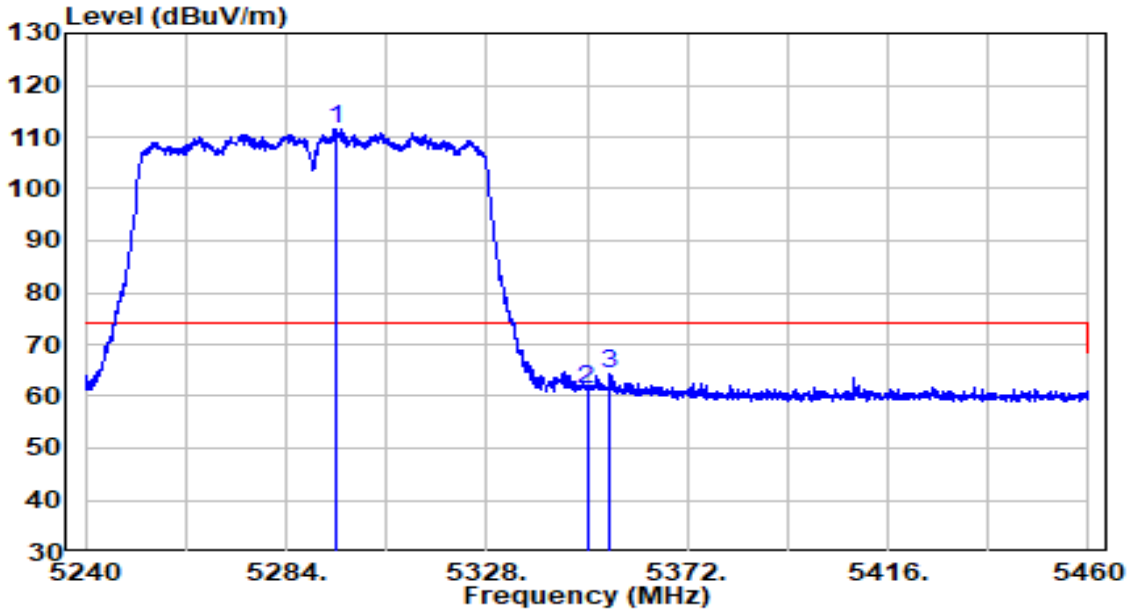


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5295.220	91.23	20.43	111.66	N/A	N/A	Peak
2	5350.000	40.83	20.52	61.36	-12.64	74.00	Peak
3	5355.170	43.98	20.53	64.51	-9.49	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	By PoE

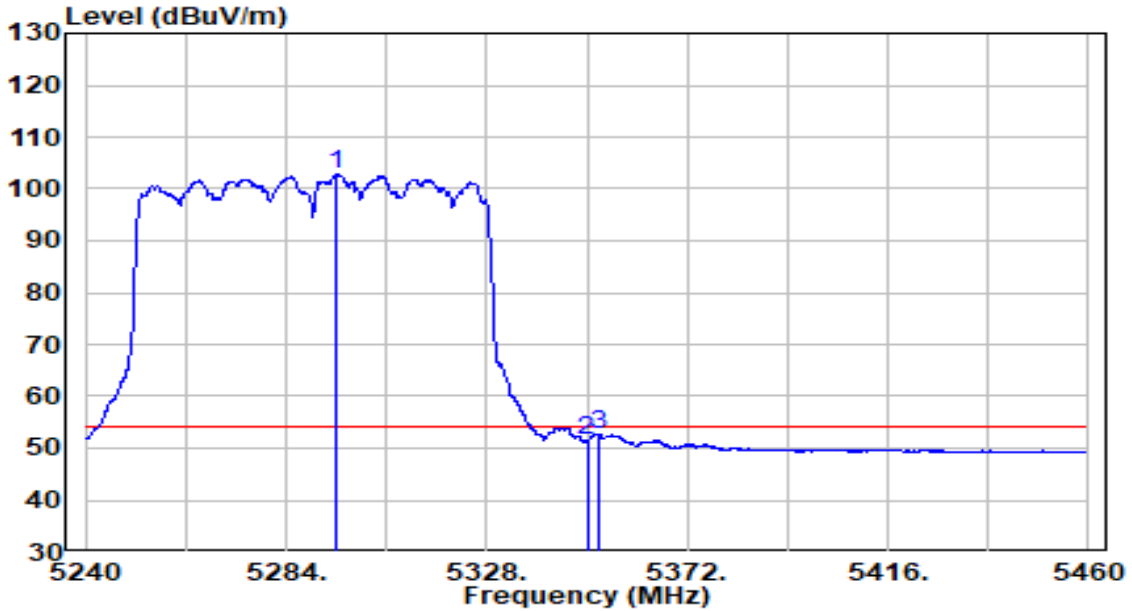


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5295.110	82.26	20.43	102.69	N/A	N/A	Average
2	5350.000	30.94	20.52	51.47	-2.53	54.00	Average
3	5352.640	32.20	20.53	52.73	-1.27	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	By PoE

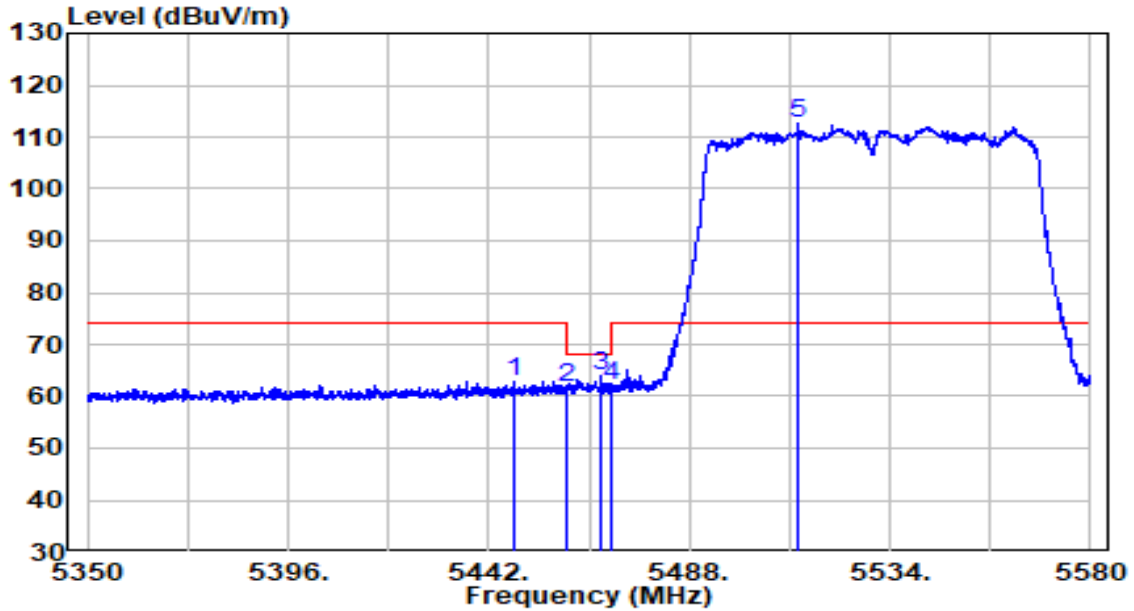


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5447.750	42.24	20.68	62.93	-11.07	74.00	Peak
2	5460.000	40.88	20.70	61.59	-6.61	68.20	Peak
3	5467.760	43.21	20.72	63.92	-4.28	68.20	Peak
4	5470.000	41.21	20.72	61.93	-6.27	68.20	Peak
5	* 5512.725	91.85	20.82	112.67	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	By PoE

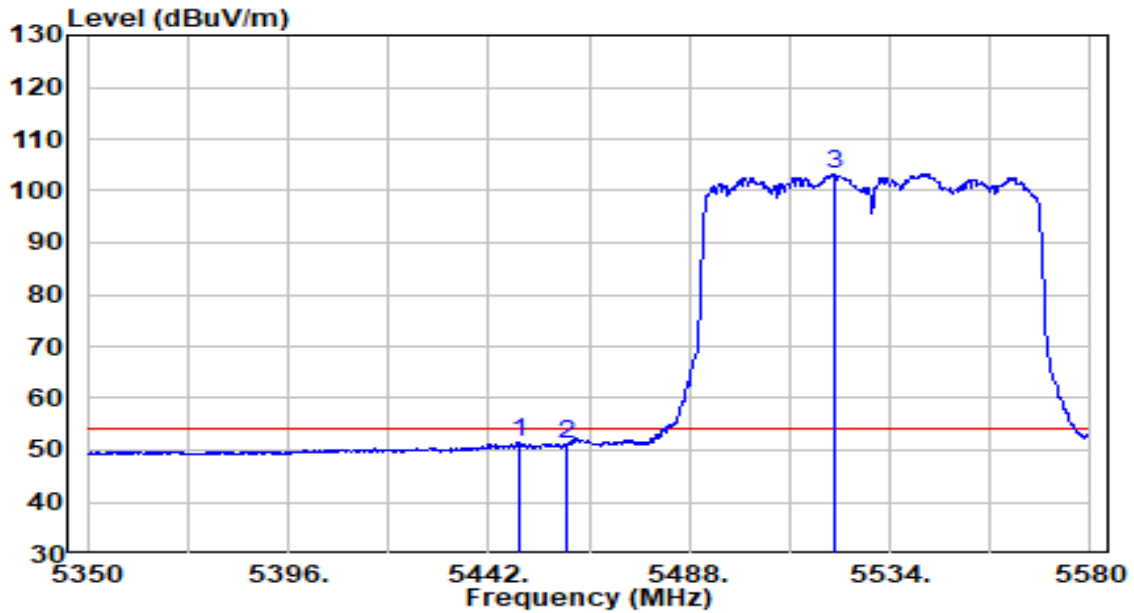


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	5449.015	30.69	20.69	51.38	-2.62	54.00	Average
2	5460.000	30.42	20.70	51.13	-2.87	54.00	Average
3	* 5521.120	82.34	20.85	103.19	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	By PoE

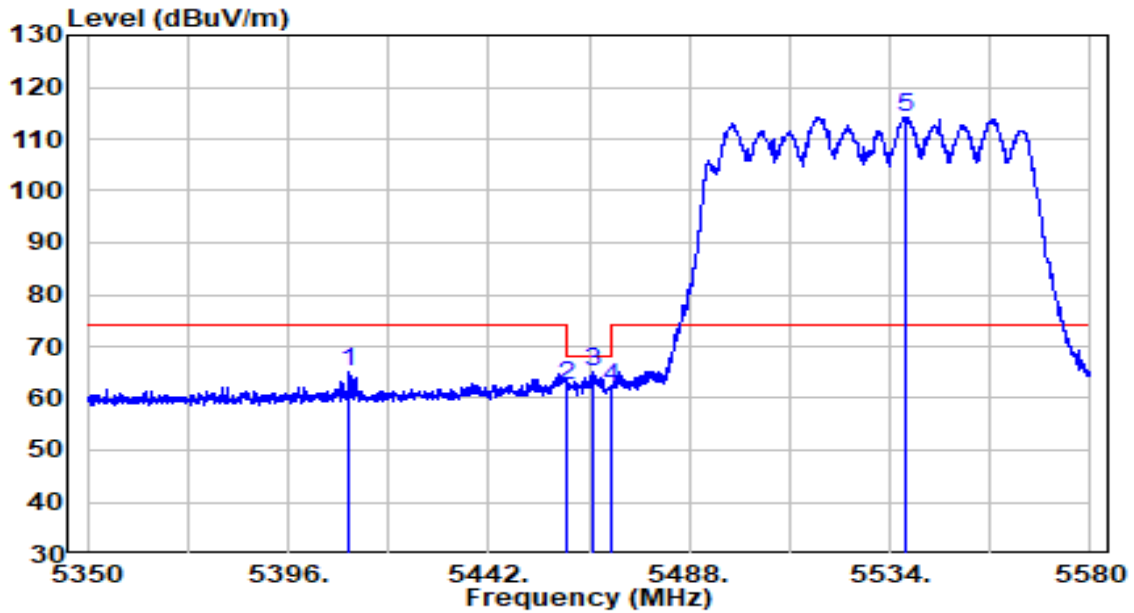


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5409.685	44.37	20.62	64.99	-9.01	74.00	Peak
2	5460.000	41.72	20.70	62.43	-5.77	68.20	Peak
3	5465.805	44.31	20.71	65.03	-3.17	68.20	Peak
4	5470.000	41.45	20.72	62.17	-6.03	68.20	Peak
5	* 5537.680	93.43	20.91	114.34	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	By PoE

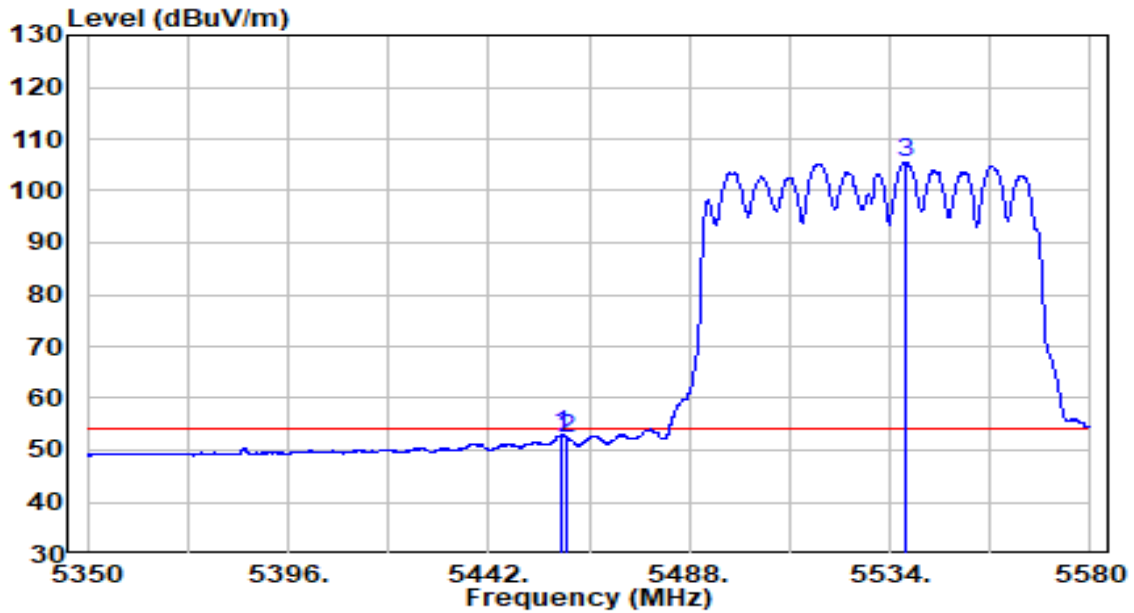


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	5458.560	32.31	20.70	53.01	-0.99	54.00	Average
2	5460.000	31.68	20.70	52.39	-1.61	54.00	Average
3	* 5537.450	84.56	20.91	105.46	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5610MHz	Test Voltage	By PoE

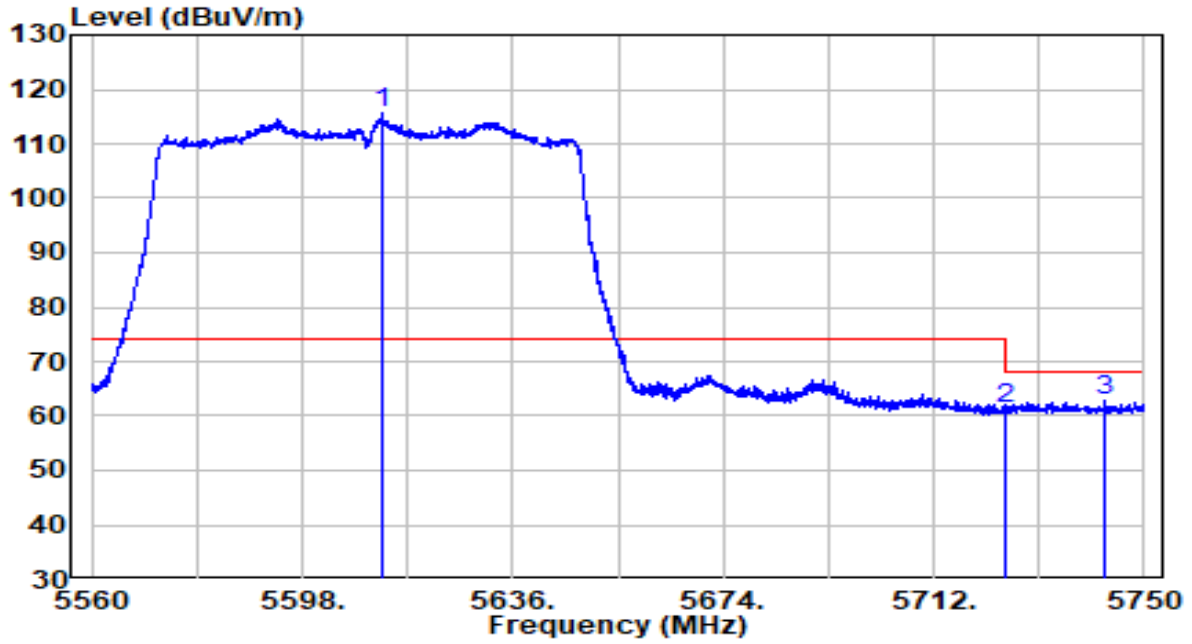


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5612.345	94.30	21.18	115.48	N/A	N/A	Peak
2	5725.000	39.91	21.59	61.50	-6.70	68.20	Peak
3	5743.065	41.09	21.65	62.75	-5.45	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5610MHz	Test Voltage	By PoE

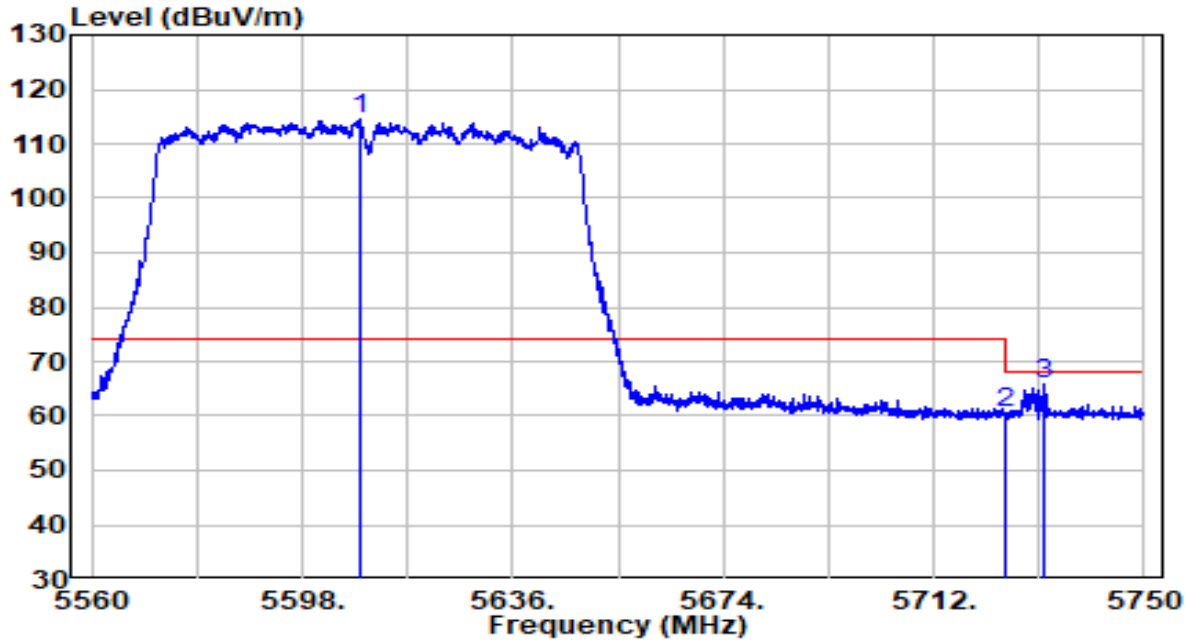


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5608.260	93.23	21.16	114.39	N/A	N/A	Peak
2	5725.000	38.94	21.59	60.52	-7.68	68.20	Peak
3	5732.045	44.33	21.61	65.94	-2.26	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	By PoE

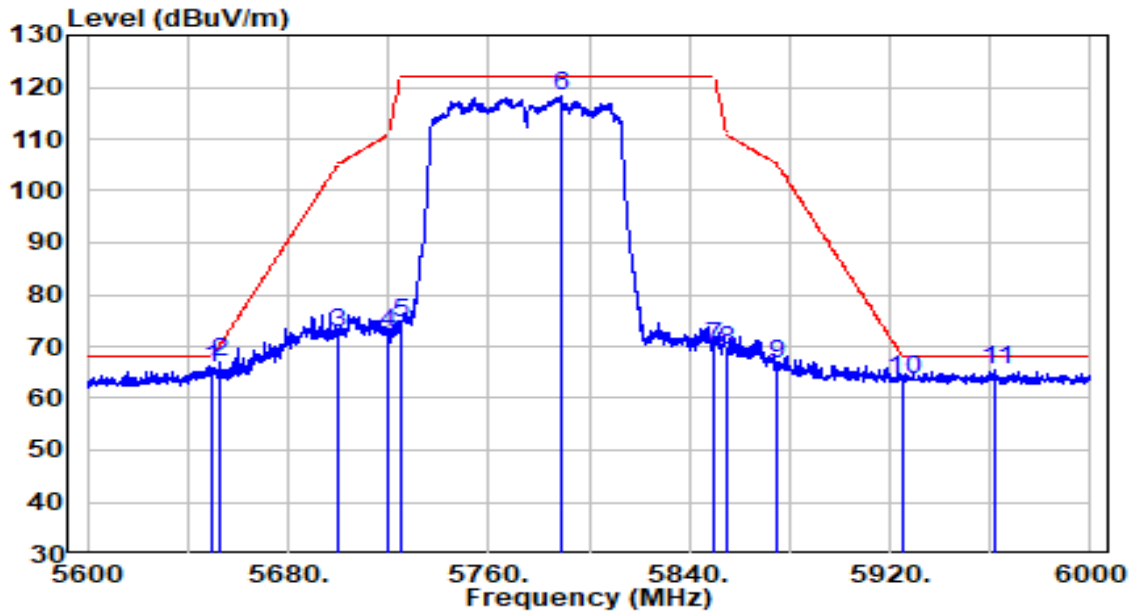


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5650.000	44.69	21.32	66.00	-2.20	68.20	Peak
2	5652.400	45.59	21.32	66.92	-3.06	69.98	Peak
3	5700.000	51.08	21.50	72.58	-32.62	105.20	Peak
4	5720.000	50.95	21.57	72.52	-38.28	110.80	Peak
5	5725.000	52.90	21.59	74.49	-47.71	122.20	Peak
6	5788.600	96.37	21.82	118.19	N/A	N/A	Peak
7	5850.000	47.97	22.04	70.01	-52.19	122.20	Peak
8	5855.000	47.07	22.06	69.13	-41.67	110.80	Peak
9	5875.000	44.59	22.14	66.73	-38.47	105.20	Peak
10	5925.000	41.21	22.32	63.53	-4.67	68.20	Peak
11	5962.400	42.97	22.45	65.42	-2.78	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	By PoE

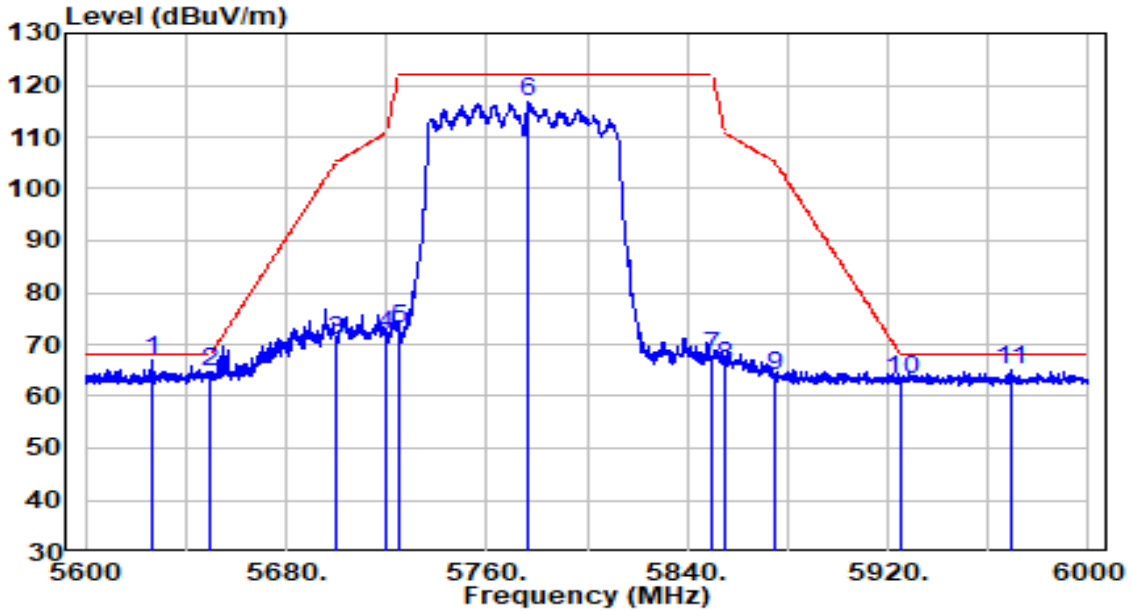


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5626.200	45.80	21.23	67.03	-1.17	68.20	Peak
2	5650.000	43.38	21.32	64.69	-3.51	68.20	Peak
3	5700.000	49.37	21.50	70.87	-34.33	105.20	Peak
4	5720.000	50.25	21.57	71.82	-38.98	110.80	Peak
5	5725.000	51.28	21.59	72.87	-49.33	122.20	Peak
6	5776.600	94.94	21.78	116.72	N/A	N/A	Peak
7	5850.000	45.81	22.04	67.86	-54.34	122.20	Peak
8	5855.000	43.76	22.06	65.82	-44.98	110.80	Peak
9	5875.000	41.67	22.14	63.81	-41.39	105.20	Peak
10	5925.000	40.75	22.32	63.07	-5.13	68.20	Peak
11	5968.800	42.57	22.48	65.05	-3.15	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.6°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80+80 at Channel 5210+5290MHz	Test Voltage	By PoE

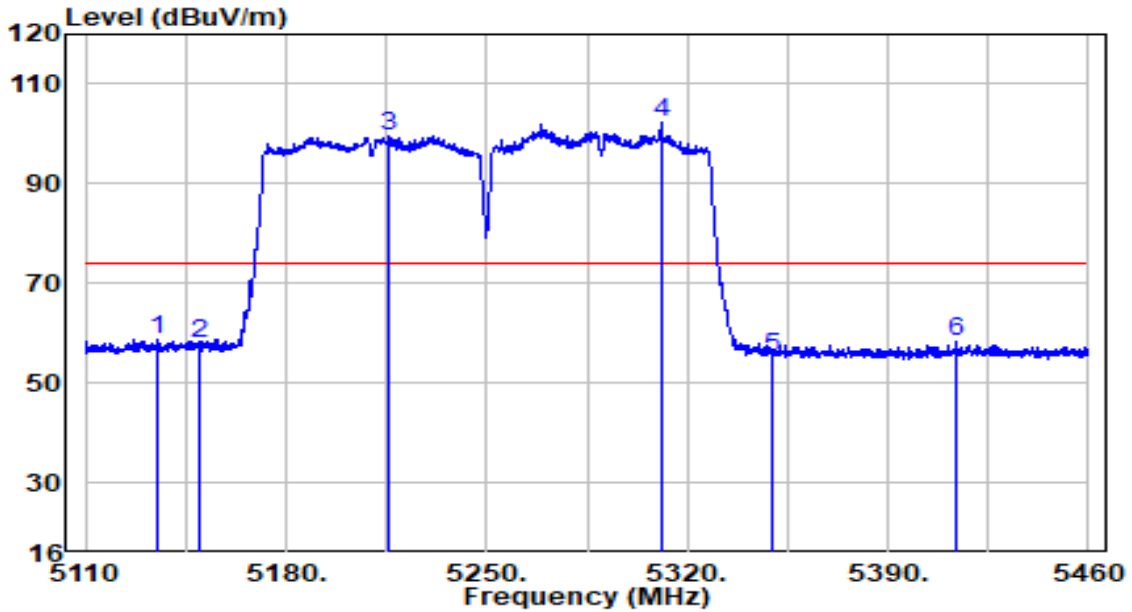


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5135.375	38.56	20.17	58.73	-15.27	74.00	Peak
2	5150.000	37.67	20.20	57.86	-16.14	74.00	Peak
3	5215.525	79.35	20.30	99.65	N/A	N/A	Peak
4	* 5310.725	81.78	20.46	102.24	N/A	N/A	Peak
5	5350.000	34.90	20.52	55.43	-18.57	74.00	Peak
6	5413.625	37.57	20.63	58.20	-15.80	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.6°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80+80 at Channel 5210+5290MHz	Test Voltage	By PoE

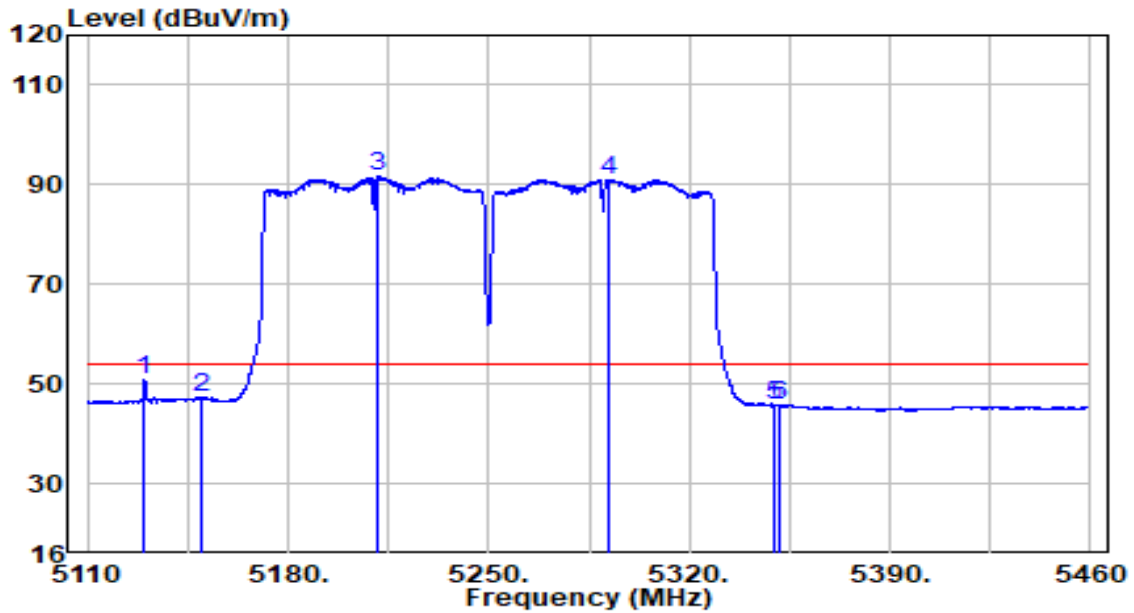


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5129.950	30.68	20.16	50.84	-3.16	54.00	Average
2	5150.000	27.02	20.20	47.21	-6.79	54.00	Average
3	* 5211.150	71.35	20.30	91.64	N/A	N/A	Average
4	5291.825	70.72	20.43	91.14	N/A	N/A	Average
5	5350.000	25.29	20.52	45.81	-8.19	54.00	Average
6	5351.675	25.38	20.53	45.91	-8.09	54.00	Average

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.6°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80+80 at Channel 5210+5290MHz	Test Voltage	By PoE

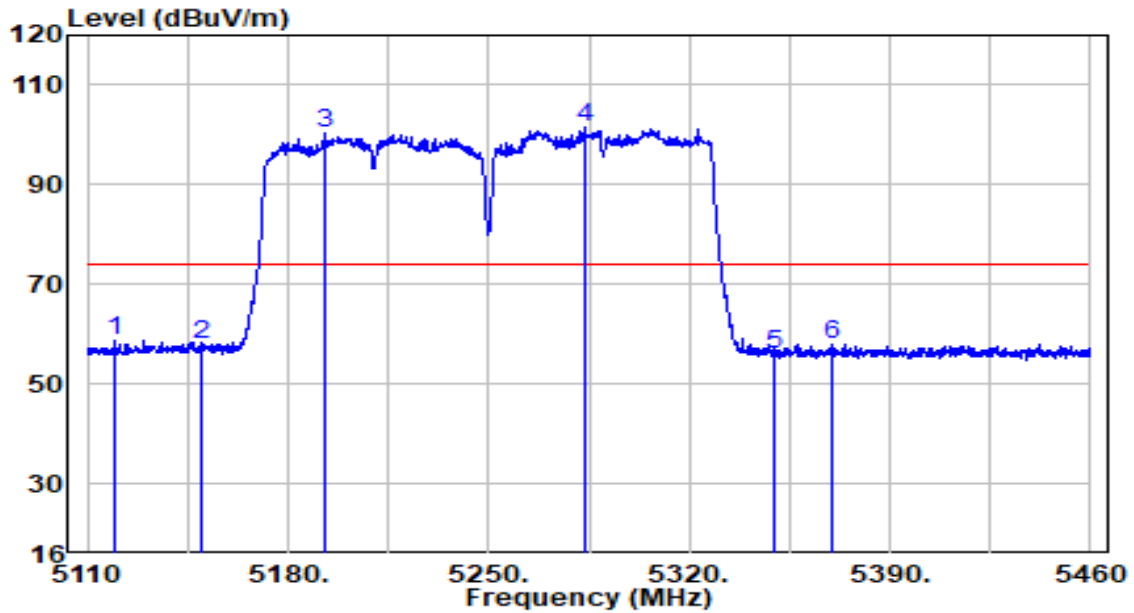


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5119.625	38.64	20.15	58.79	-15.21	74.00	Peak
2	5150.000	37.74	20.20	57.94	-16.06	74.00	Peak
3	5192.600	79.96	20.27	100.22	N/A	N/A	Peak
4	* 5283.250	80.98	20.41	101.40	N/A	N/A	Peak
5	5350.000	35.62	20.52	56.15	-17.85	74.00	Peak
6	5370.050	37.43	20.56	57.98	-16.02	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.6°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80+80 at Channel 5210+5290MHz	Test Voltage	By PoE

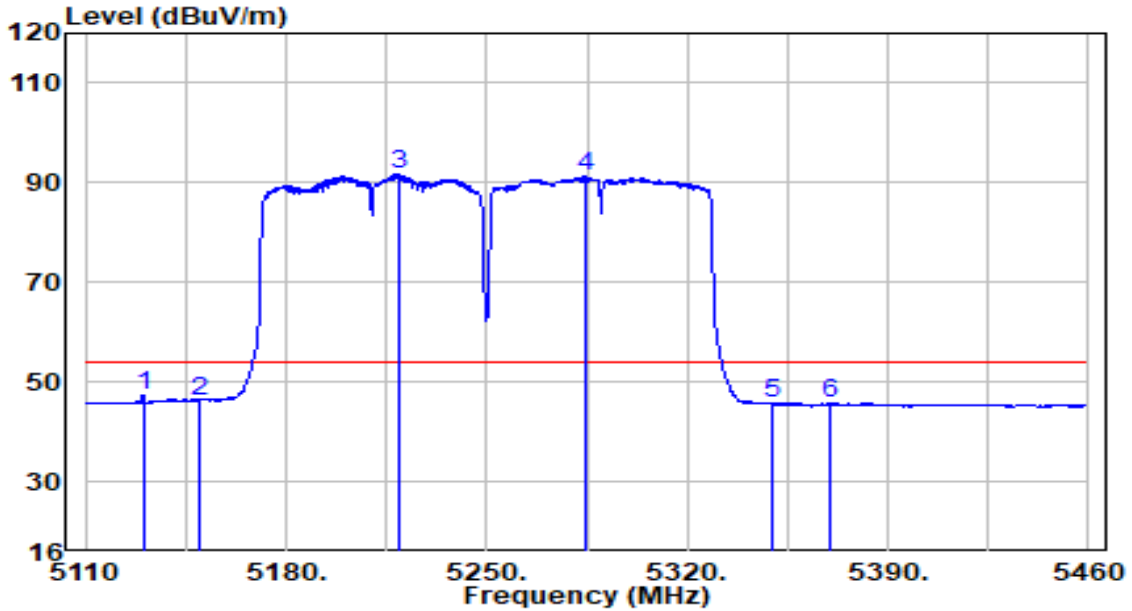


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5130.125	27.31	20.16	47.47	-6.53	54.00	Average
2	5150.000	26.16	20.20	46.35	-7.65	54.00	Average
3	* 5219.550	71.44	20.31	91.75	N/A	N/A	Average
4	5284.475	71.05	20.42	91.46	N/A	N/A	Average
5	5350.000	25.22	20.52	45.75	-8.25	54.00	Average
6	5370.050	25.35	20.56	45.91	-8.09	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.6°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80+80 at Channel 5530+5610MHz	Test Voltage	By PoE

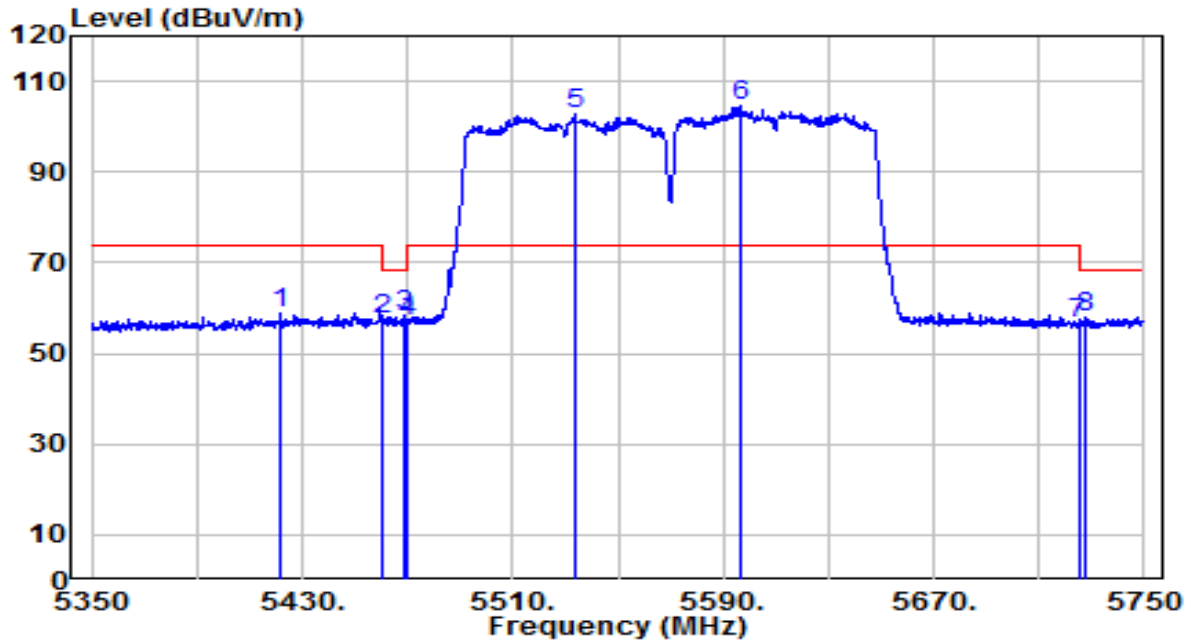


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	5421.400	38.38	20.64	59.02	-14.98	74.00	Peak
2	5460.000	36.87	20.70	57.58	-10.62	68.20	Peak
3	5468.600	37.60	20.72	58.32	-9.88	68.20	Peak
4	5470.000	36.48	20.72	57.20	-11.00	68.20	Peak
5	5534.000	81.76	20.89	102.65	N/A	N/A	Peak
6	* 5596.600	83.38	21.12	104.50	N/A	N/A	Peak
7	5725.000	35.04	21.59	56.62	-11.58	68.20	Peak
8	5727.400	36.57	21.60	58.17	-10.03	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.6°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80+80 at Channel 5530+5610MHz	Test Voltage	By PoE

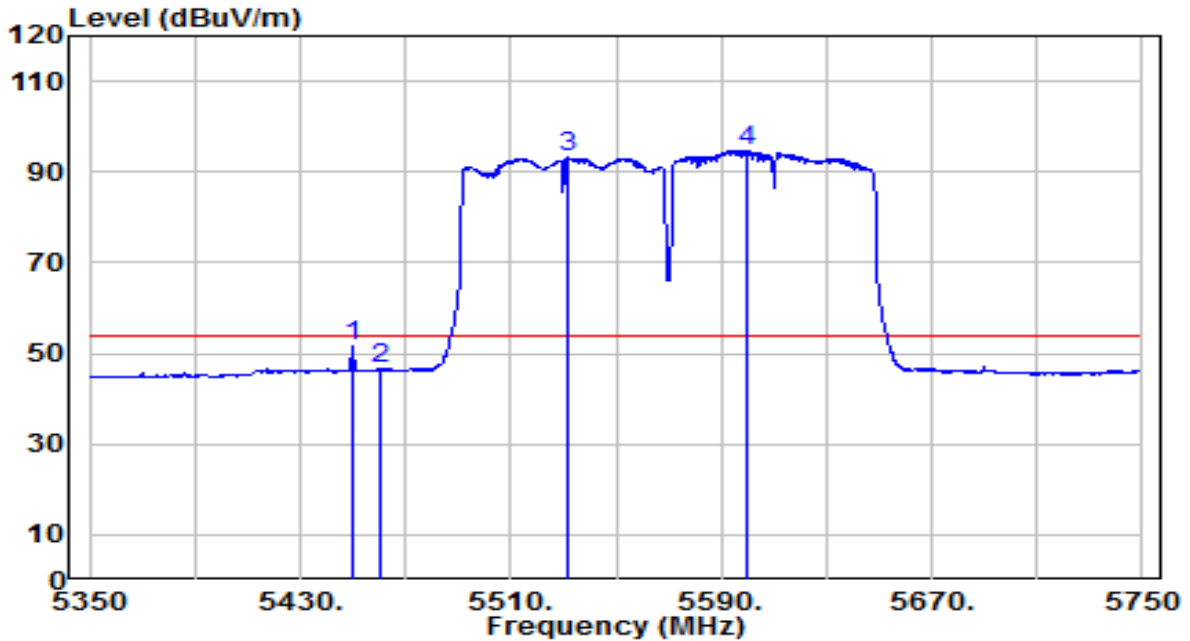


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5450.000	30.77	20.69	51.46	-2.54	54.00	Average
2	5460.000	25.82	20.70	46.52	-7.48	54.00	Average
3	5531.600	72.18	20.89	93.07	N/A	N/A	Average
4	* 5599.600	73.56	21.13	94.70	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.6°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80+80 at Channel 5530+5610MHz	Test Voltage	By PoE

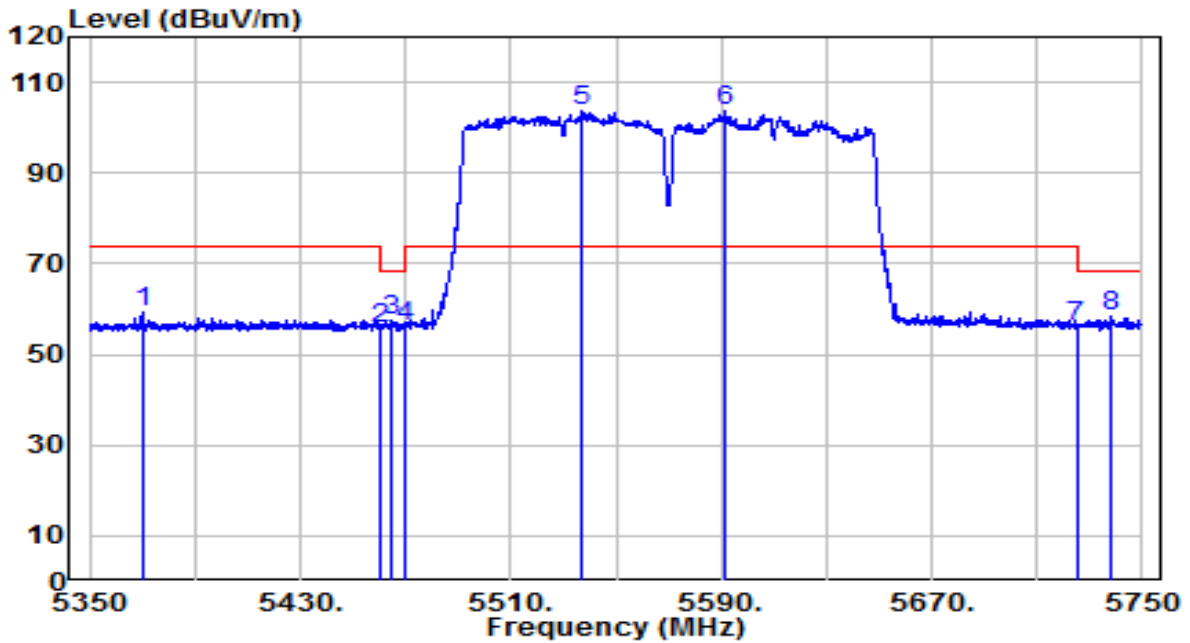


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5370.200	38.80	20.56	59.36	-14.64	74.00	Peak
2	5460.000	34.78	20.70	55.48	-12.72	68.20	Peak
3	5464.400	36.81	20.71	57.53	-10.67	68.20	Peak
4	5470.000	35.42	20.72	56.15	-12.05	68.20	Peak
5	* 5537.400	82.75	20.91	103.65	N/A	N/A	Peak
6	5591.800	82.40	21.10	103.51	N/A	N/A	Peak
7	5725.000	34.68	21.59	56.27	-11.93	68.20	Peak
8	5738.600	36.65	21.64	58.29	-9.91	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.6°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80+80 at Channel 5530+5610MHz	Test Voltage	By PoE

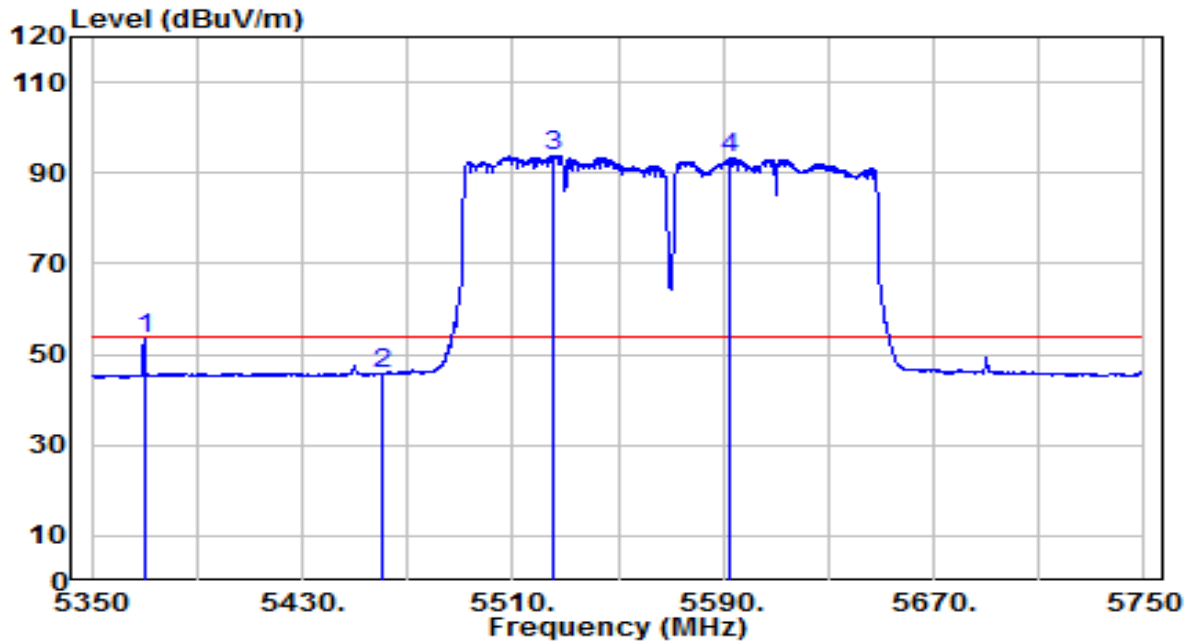


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5370.000	33.04	20.56	53.60	-0.40	54.00	Average
2	5460.000	24.94	20.70	45.65	-8.35	54.00	Average
3	* 5525.800	73.01	20.86	93.87	N/A	N/A	Average
4	5592.400	72.21	21.11	93.31	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz	Test Voltage	By PoE

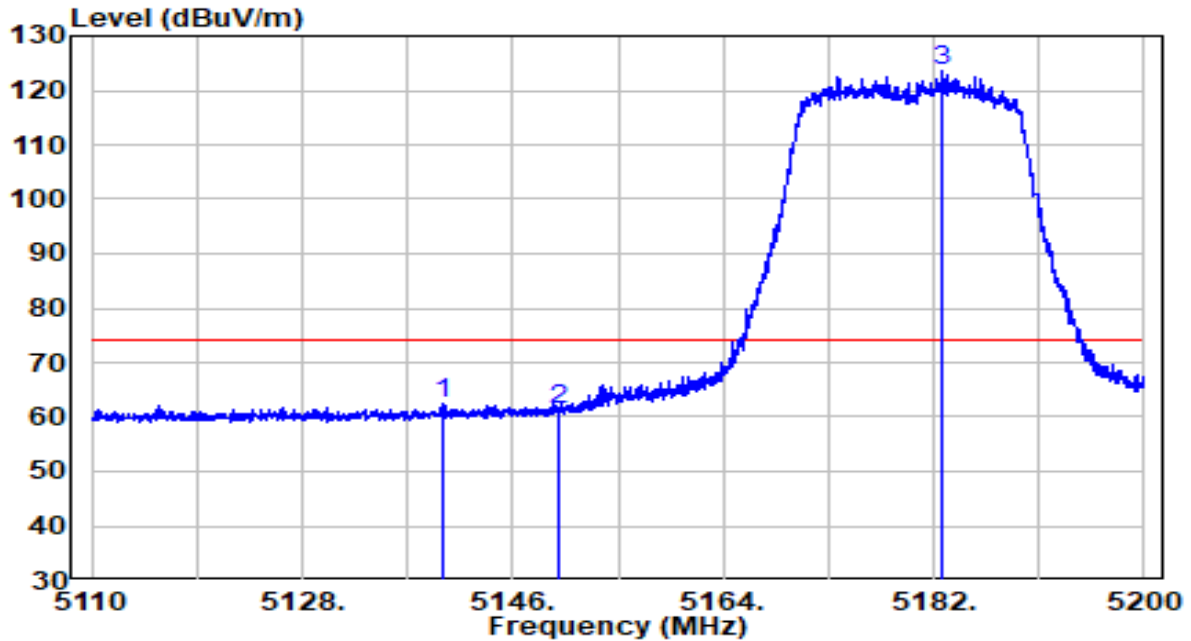


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5140.015	42.12	20.18	62.30	-11.70	74.00	Peak
2	5150.000	40.96	20.20	61.16	-12.84	74.00	Peak
3	* 5182.675	103.29	20.25	123.54	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz	Test Voltage	By PoE

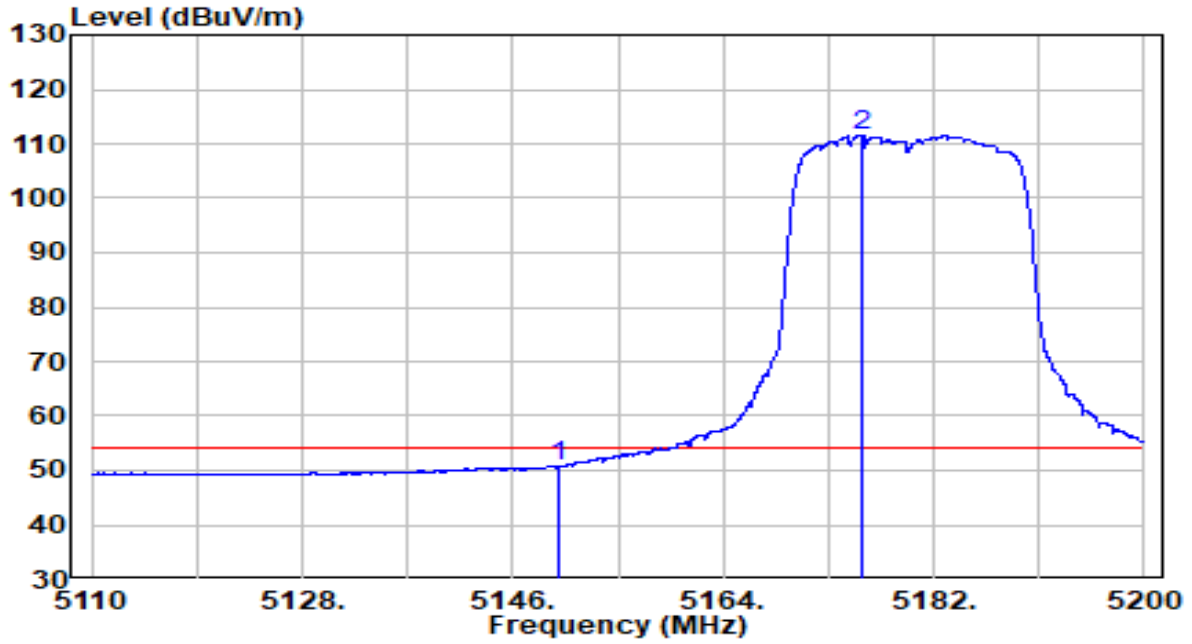


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	5150.000	30.47	20.20	50.67	-3.33	54.00	Average
2	* 5175.925	91.25	20.24	111.49	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz	Test Voltage	By PoE

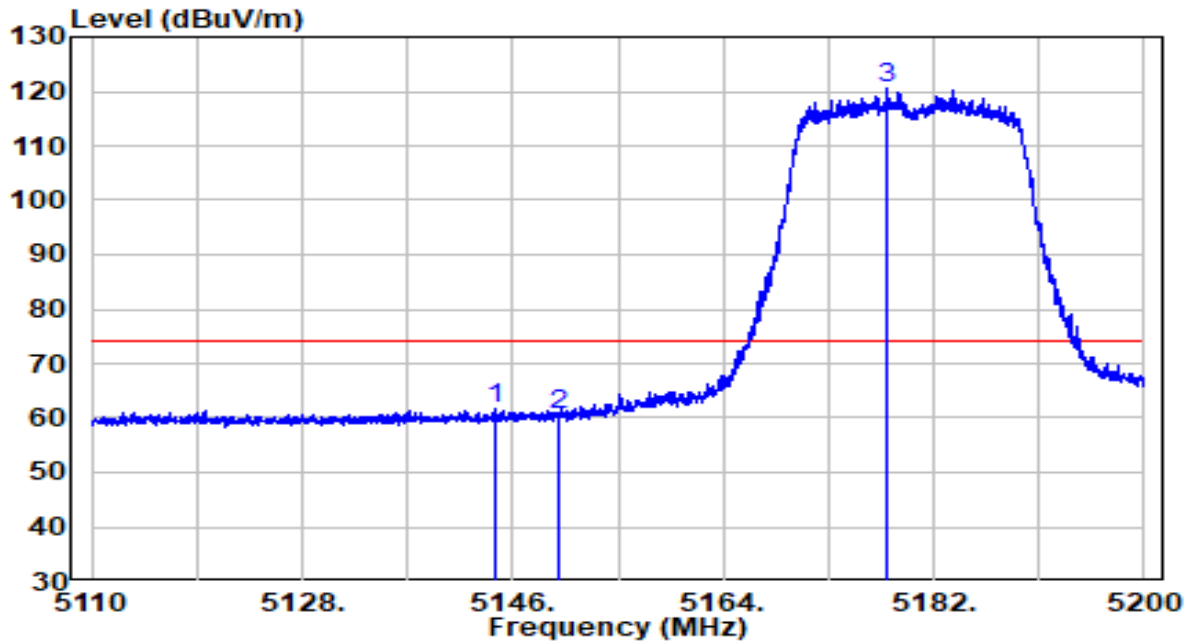


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5144.605	41.40	20.19	61.59	-12.41	74.00	Peak
2	5150.000	40.35	20.20	60.55	-13.45	74.00	Peak
3	* 5178.085	100.23	20.24	120.48	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz	Test Voltage	By PoE

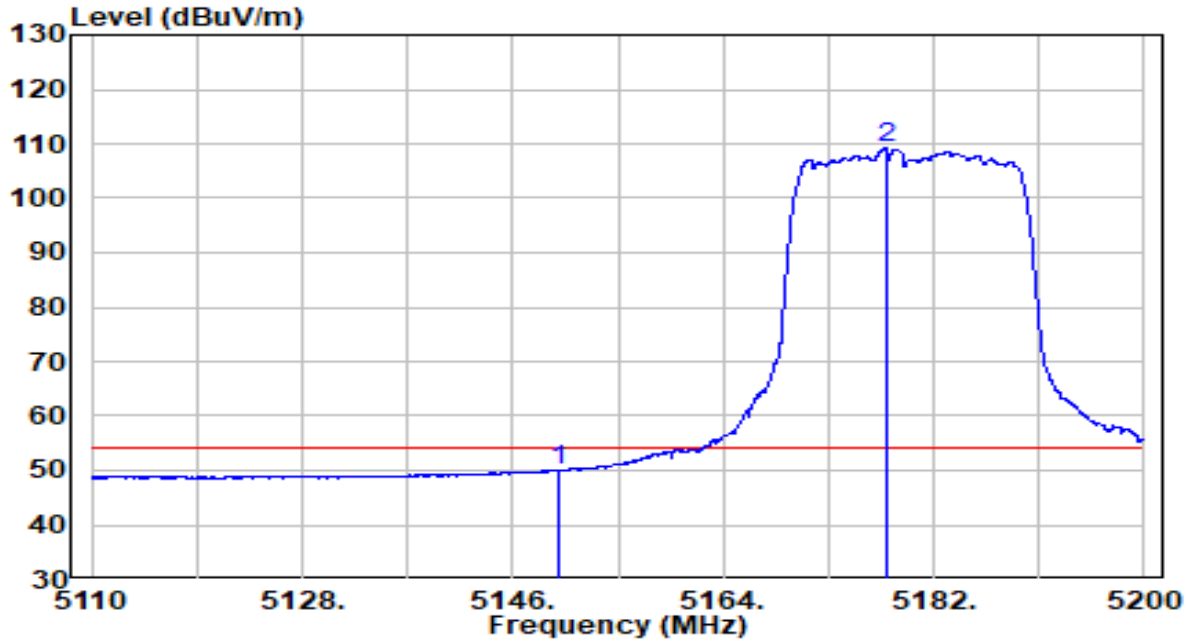


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5150.000	29.98	20.20	50.17	-3.83	54.00	Average
2	* 5177.995	89.01	20.24	109.25	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	By PoE

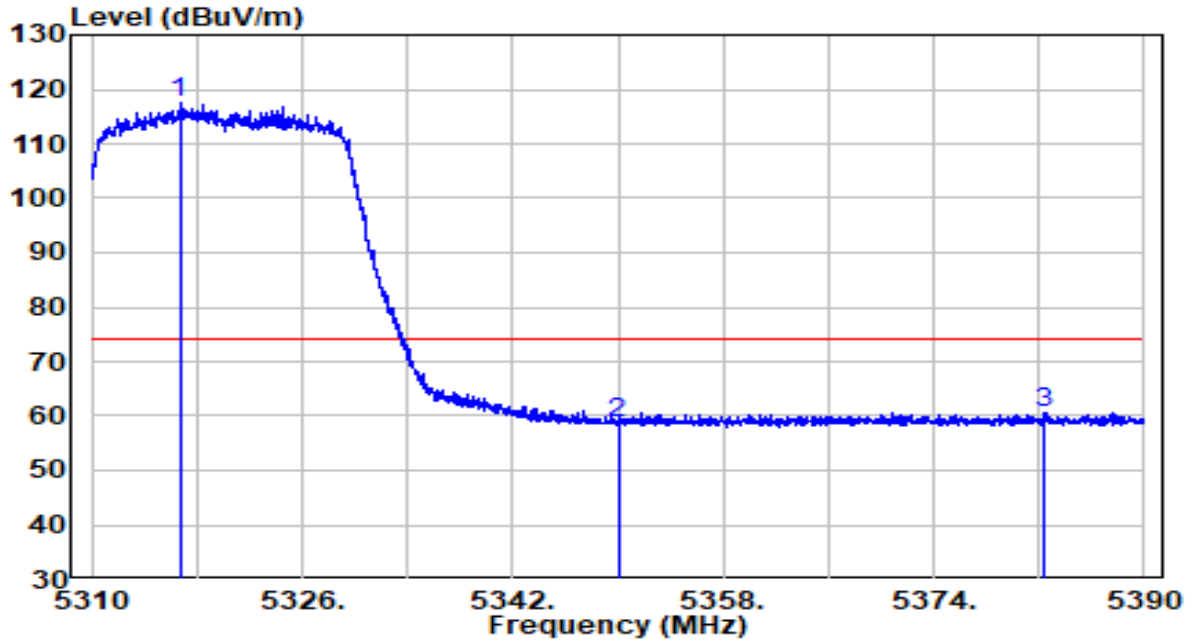


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5316.680	97.05	20.47	117.51	N/A	N/A	Peak
2	5350.000	38.06	20.52	58.58	-15.42	74.00	Peak
3	5382.440	39.98	20.58	60.55	-13.45	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	By PoE

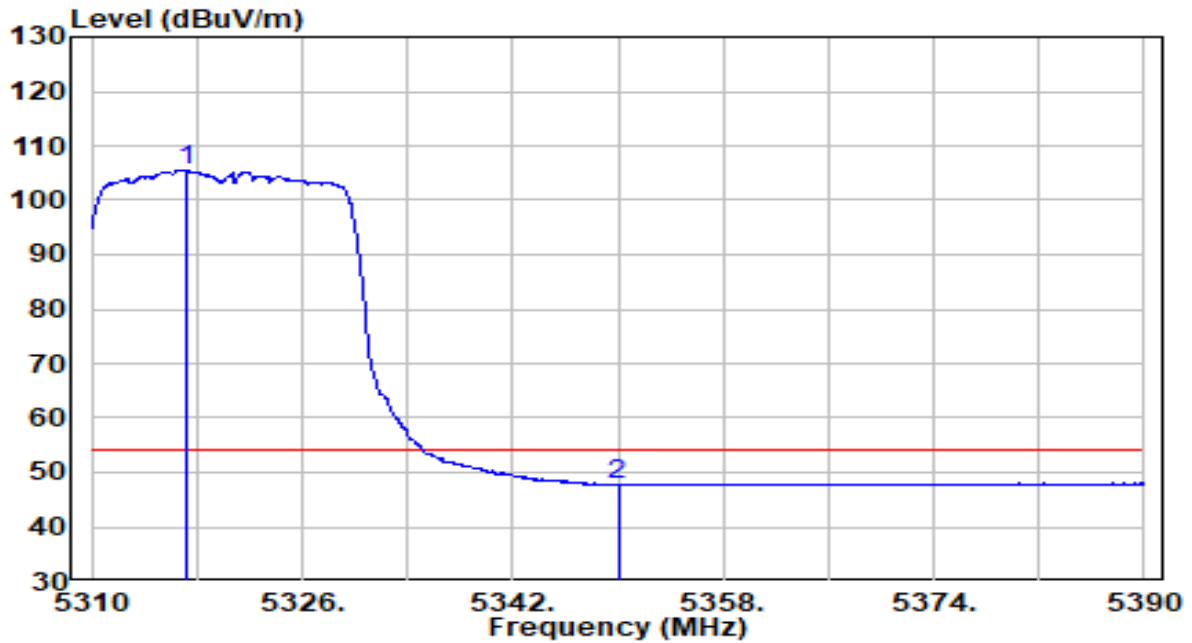


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5317.160	85.03	20.47	105.50	N/A	N/A	Average
2	5350.000	27.25	20.52	47.78	-6.22	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	By PoE

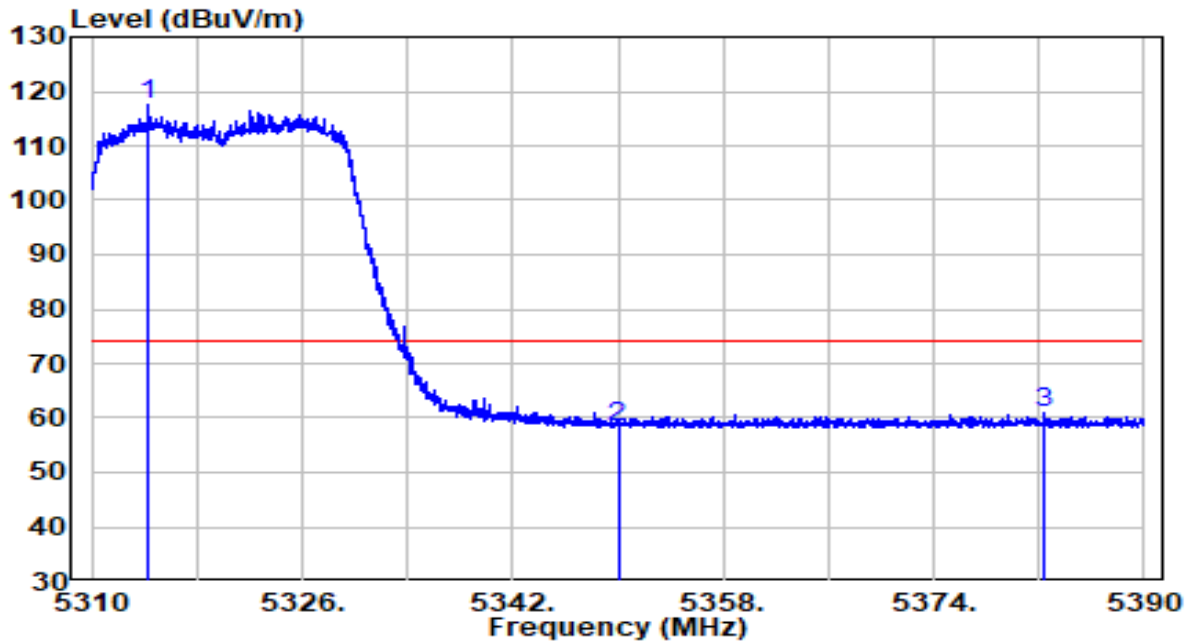


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	* 5314.360	97.06	20.47	117.53	N/A	N/A	Peak
2	5350.000	37.94	20.52	58.46	-15.54	74.00	Peak
3	5382.320	40.24	20.58	60.82	-13.18	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	By PoE

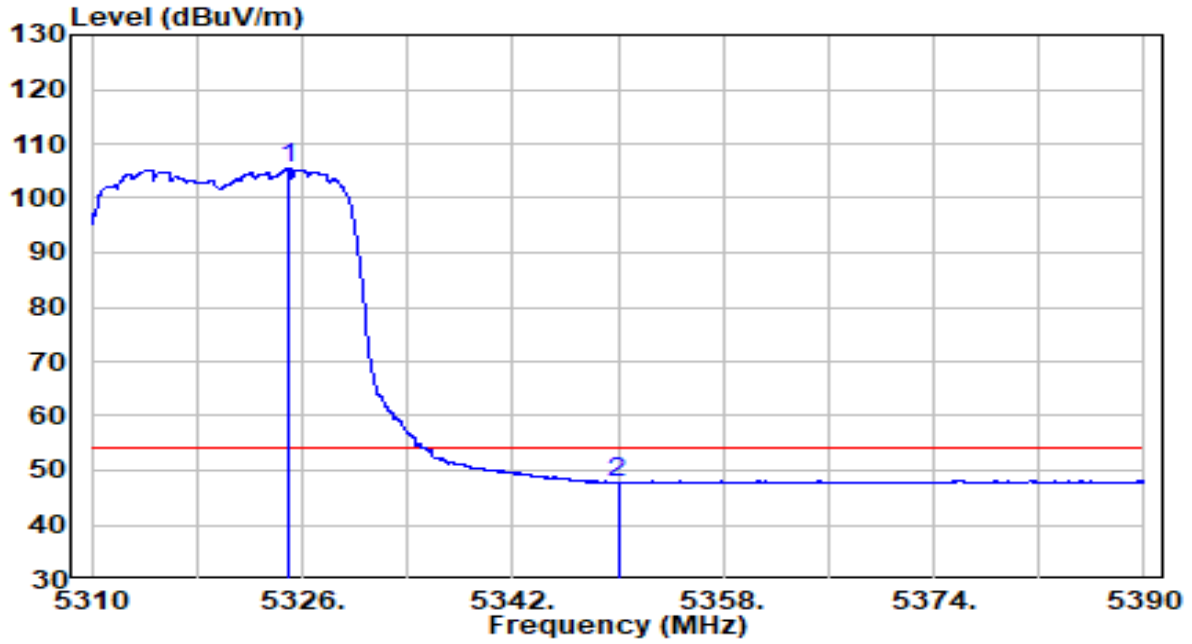


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5325.040	85.04	20.48	105.52	N/A	N/A	Average
2	5350.000	27.23	20.52	47.75	-6.25	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz	Test Voltage	By PoE

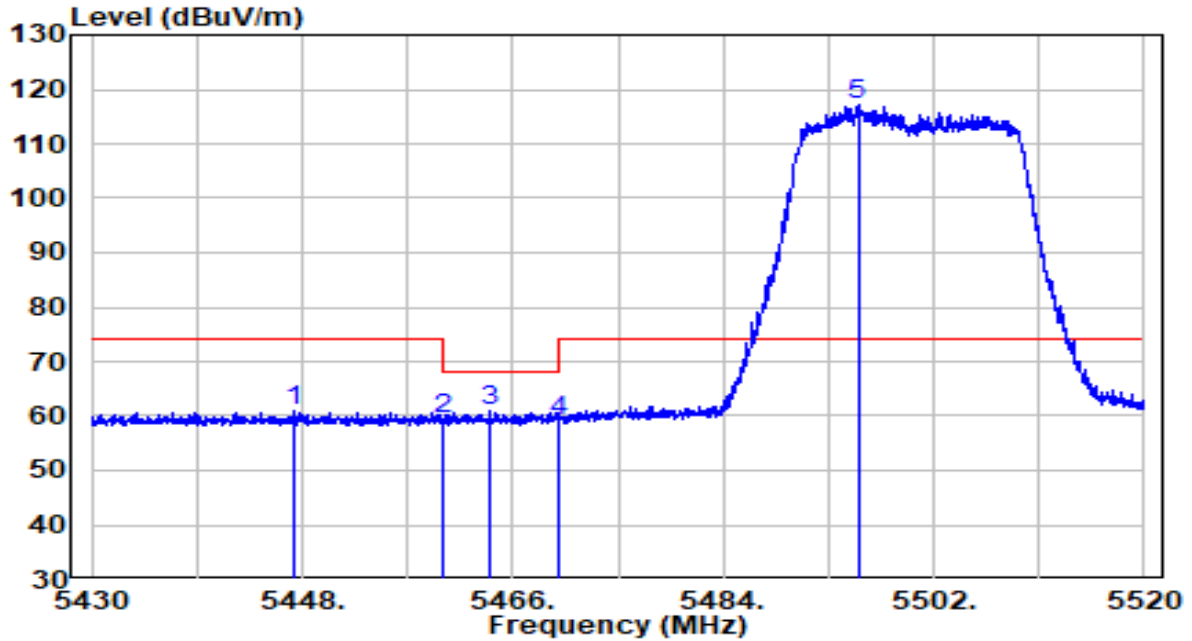


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5447.235	40.21	20.68	60.89	-13.11	74.00	Peak
2	5460.000	38.64	20.70	59.34	-8.86	68.20	Peak
3	5464.020	40.40	20.71	61.11	-7.09	68.20	Peak
4	5470.000	38.34	20.72	59.06	-9.14	68.20	Peak
5	* 5495.520	96.59	20.76	117.35	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz	Test Voltage	By PoE

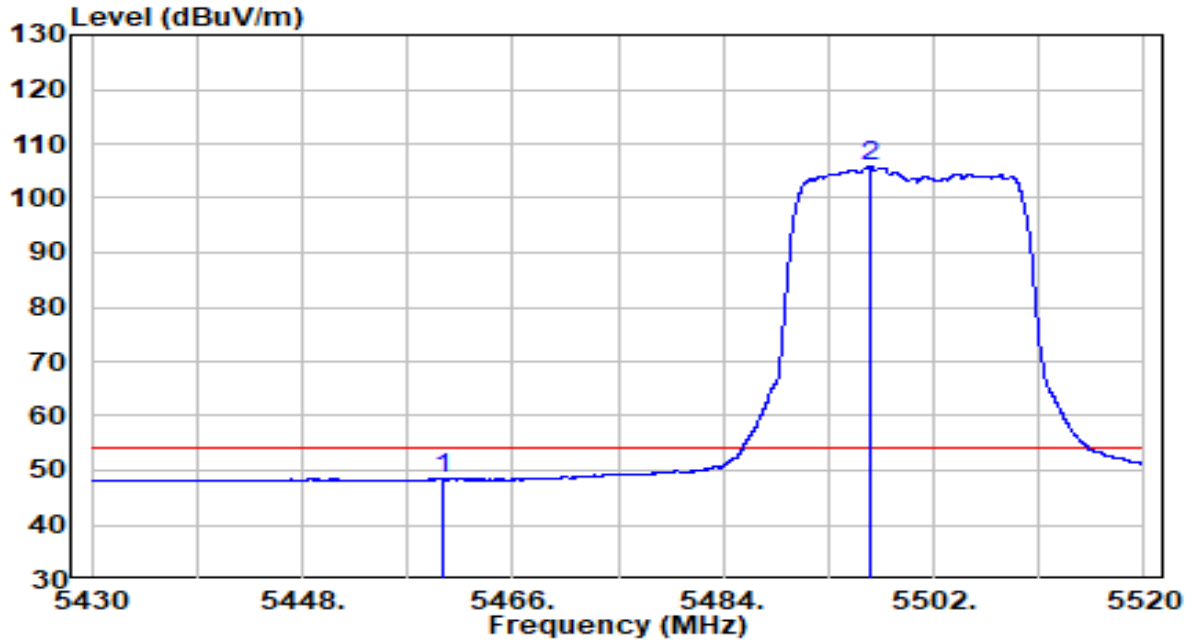


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5460.000	27.63	20.70	48.33	-5.67	54.00	Average
2	* 5496.690	85.06	20.76	105.82	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz	Test Voltage	By PoE

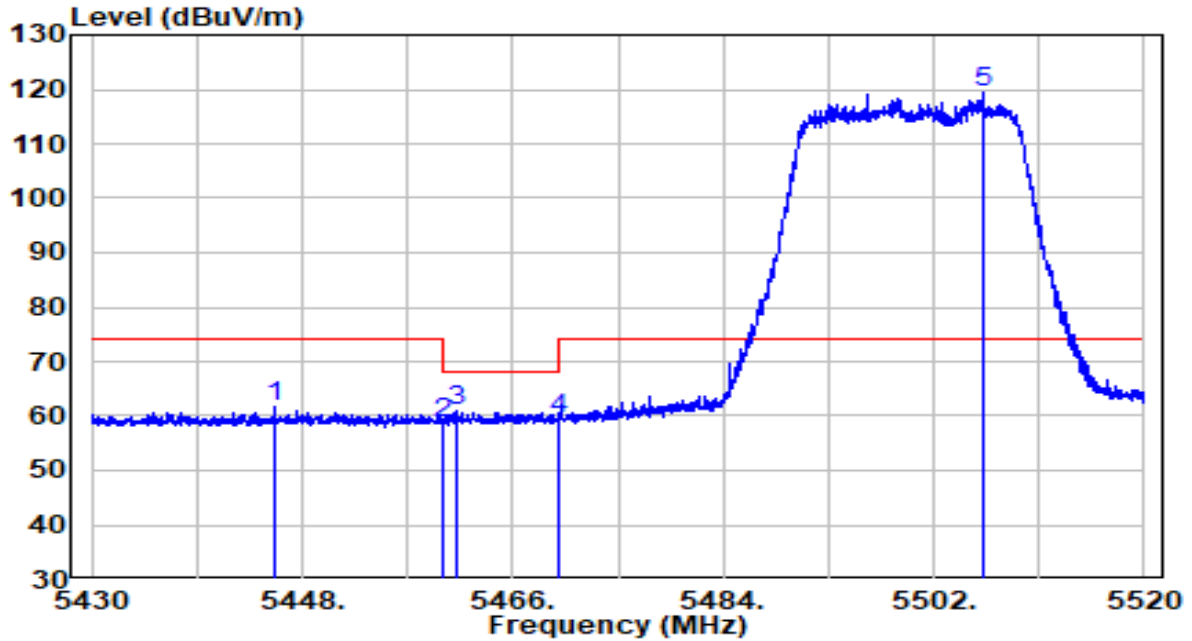


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5445.615	41.06	20.68	61.74	-12.26	74.00	Peak
2	5460.000	37.94	20.70	58.65	-9.55	68.20	Peak
3	5461.140	40.07	20.71	60.77	-7.43	68.20	Peak
4	5470.000	38.55	20.72	59.27	-8.93	68.20	Peak
5	* 5506.140	98.80	20.79	119.59	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz	Test Voltage	By PoE

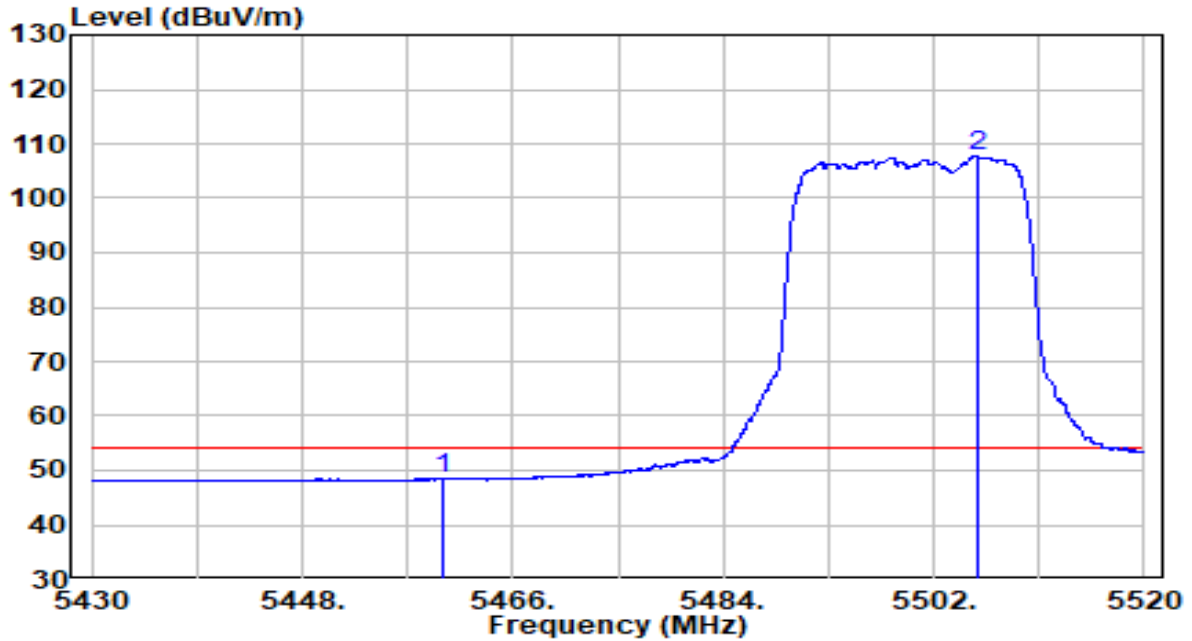


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5460.000	27.66	20.70	48.37	-5.63	54.00	Average
2	* 5505.735	87.01	20.79	107.80	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	By PoE

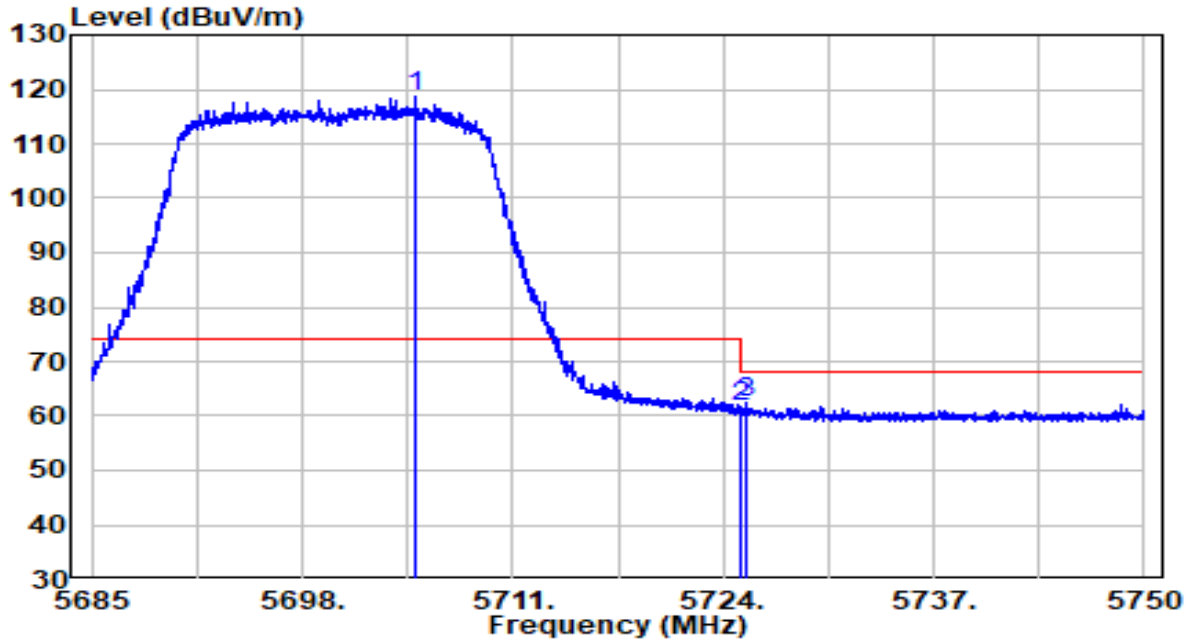


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)	
1	*	5704.955	97.08	21.52	118.59	N/A	N/A	Peak
2		5725.000	40.20	21.59	61.78	-6.42	68.20	Peak
3		5725.495	40.93	21.59	62.53	-5.67	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	By PoE

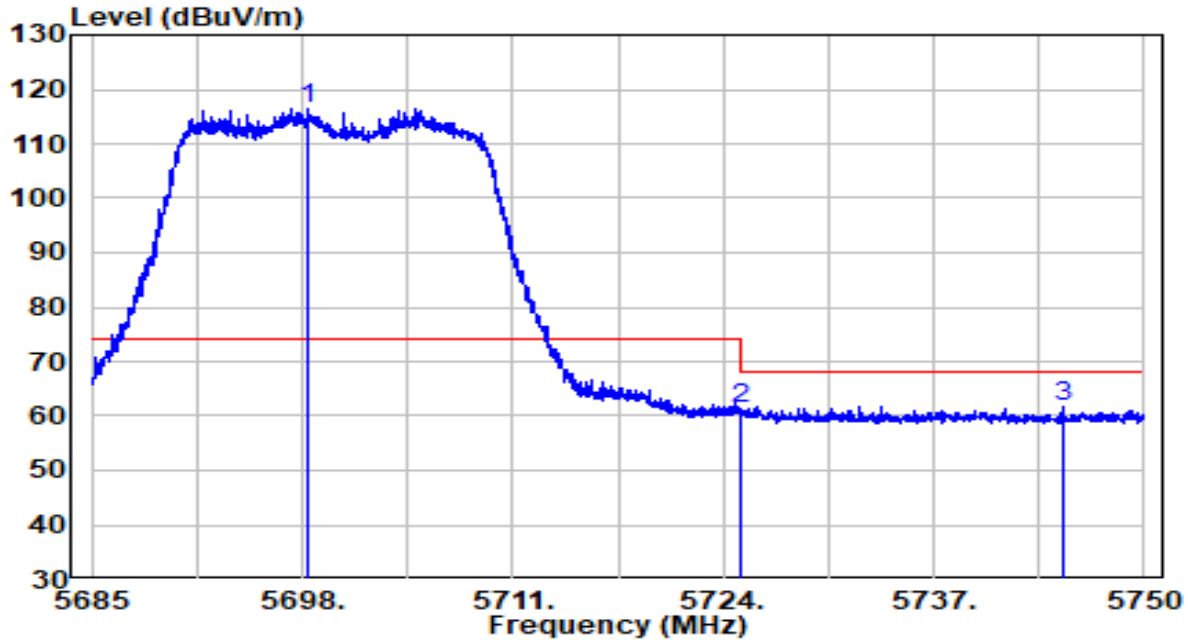


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)	
1	*	5698.292	94.94	21.49	116.43	N/A	N/A	Peak
2		5725.000	39.58	21.59	61.17	-7.03	68.20	Peak
3		5744.995	40.15	21.66	61.81	-6.39	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5745MHz	Test Voltage	By PoE

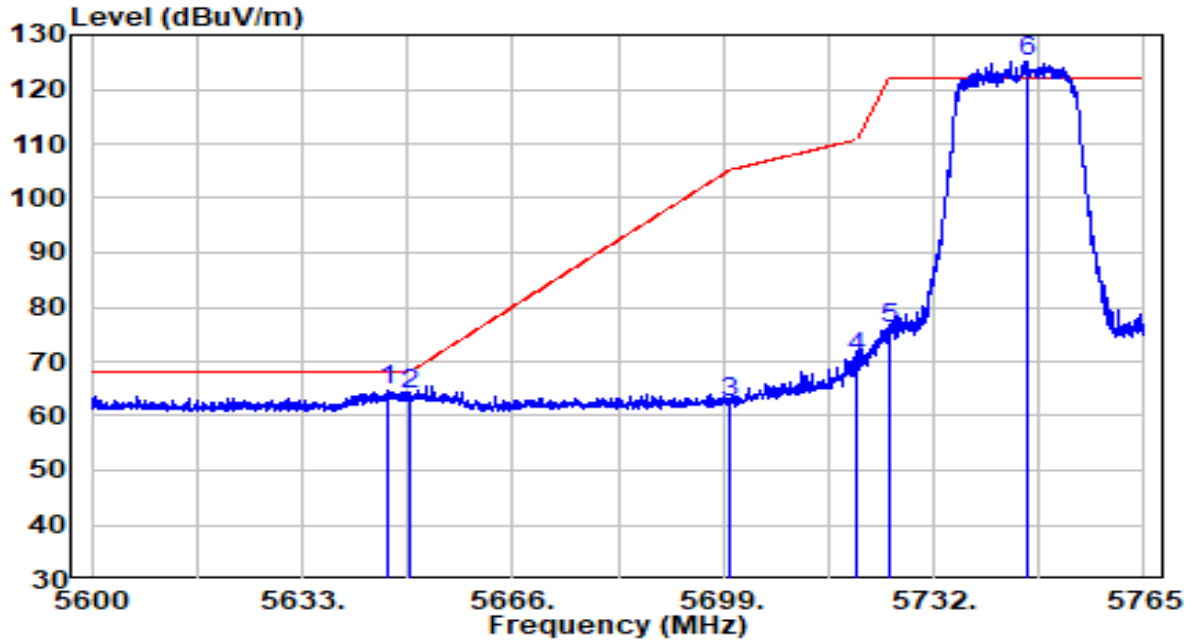


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5646.283	43.30	21.30	64.61	-3.59	68.20	Peak
2	5650.000	42.63	21.32	63.95	-4.25	68.20	Peak
3	5700.000	40.92	21.50	62.42	-42.78	105.20	Peak
4	5720.000	49.26	21.57	70.83	-39.97	110.80	Peak
5	5725.000	54.41	21.59	75.99	-46.21	122.20	Peak
6	* 5746.685	103.40	21.67	125.07	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5745MHz	Test Voltage	By PoE

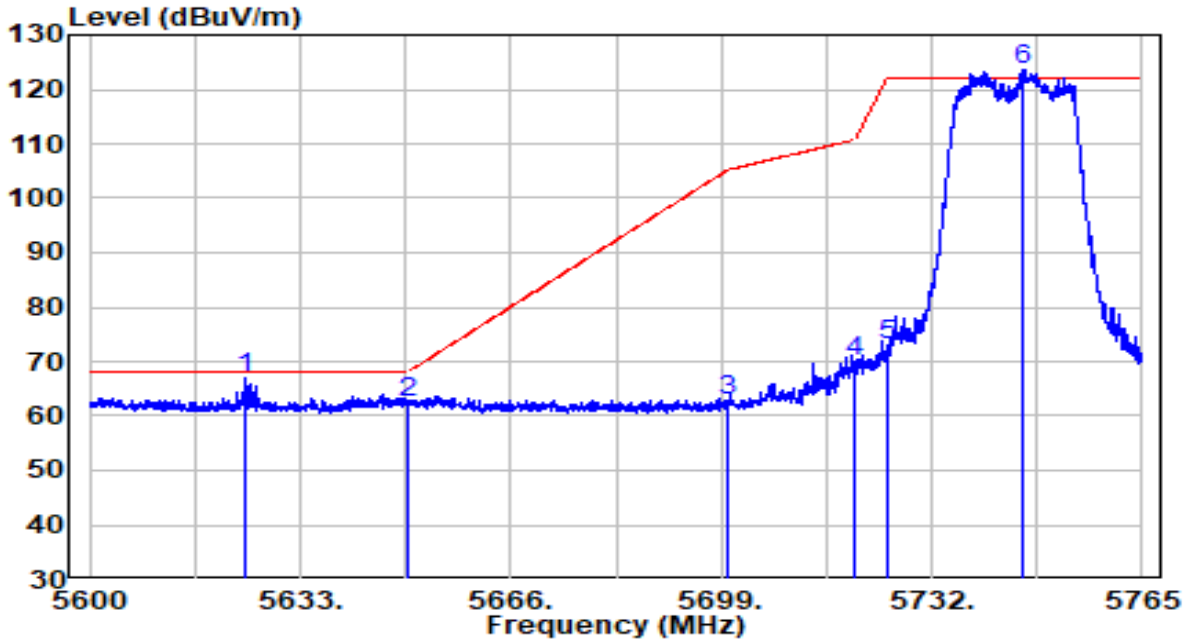


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5624.420	45.70	21.22	66.92	-1.28	68.20	Peak
2	5650.000	41.17	21.32	62.49	-5.71	68.20	Peak
3	5700.000	41.48	21.50	62.98	-42.22	105.20	Peak
4	5720.000	48.42	21.57	69.99	-40.81	110.80	Peak
5	5725.000	51.33	21.59	72.91	-49.29	122.20	Peak
6	* 5746.438	102.09	21.67	123.76	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5825MHz	Test Voltage	By PoE

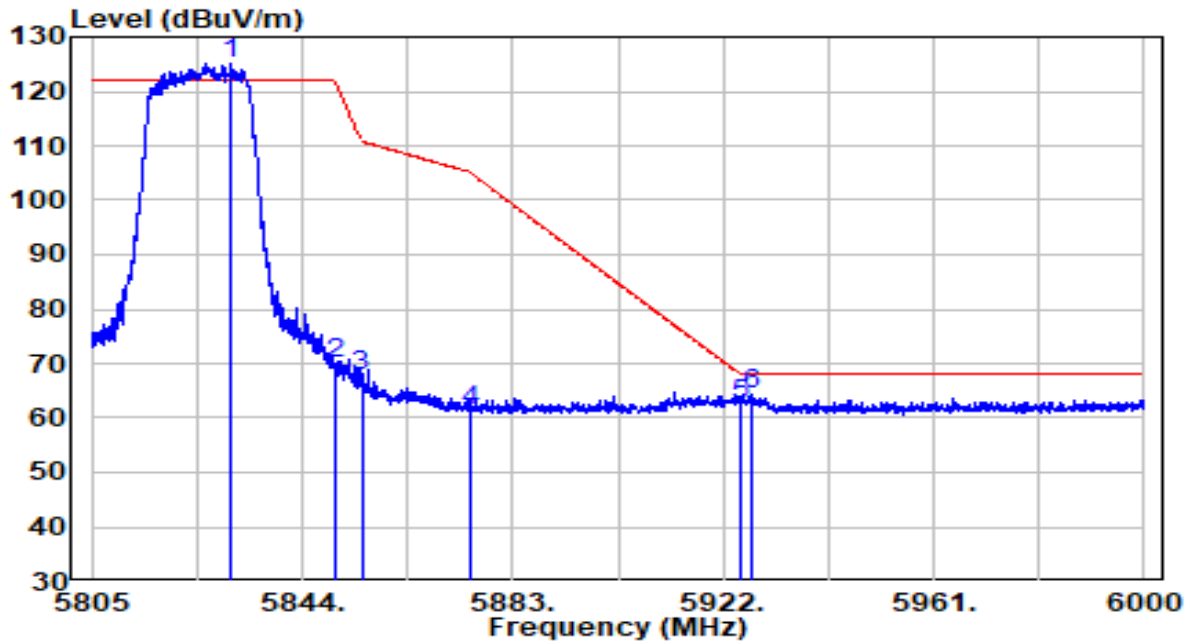


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5830.643	103.30	21.97	125.28	N/A	N/A	Peak
2	5850.000	47.81	22.04	69.86	-52.34	122.20	Peak
3	5855.000	45.54	22.06	67.60	-43.20	110.80	Peak
4	5875.000	39.33	22.14	61.46	-43.74	105.20	Peak
5	5925.000	40.00	22.32	62.31	-5.89	68.20	Peak
6	5927.167	41.91	22.32	64.23	-3.97	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5825MHz	Test Voltage	By PoE

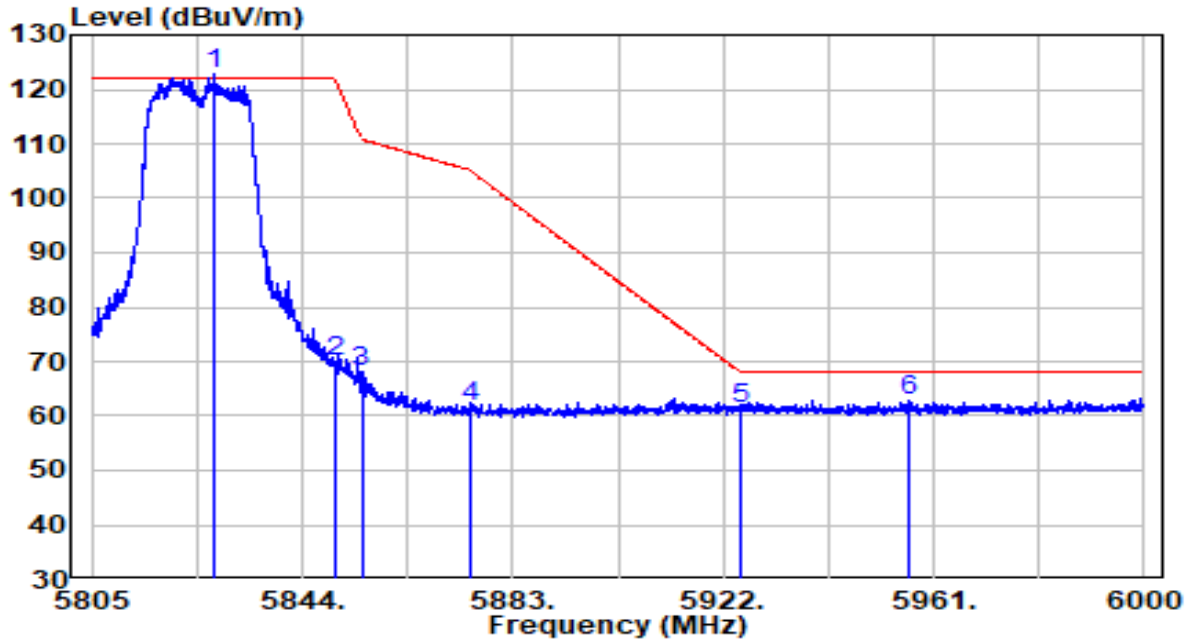


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5827.620	101.02	21.96	122.99	N/A	N/A	Peak
2	5850.000	48.13	22.04	70.18	-52.02	122.20	Peak
3	5855.000	45.94	22.06	68.00	-42.80	110.80	Peak
4	5875.000	39.40	22.14	61.53	-43.67	105.20	Peak
5	5925.000	38.91	22.32	61.22	-6.98	68.20	Peak
6	5956.417	40.53	22.43	62.96	-5.24	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	By PoE

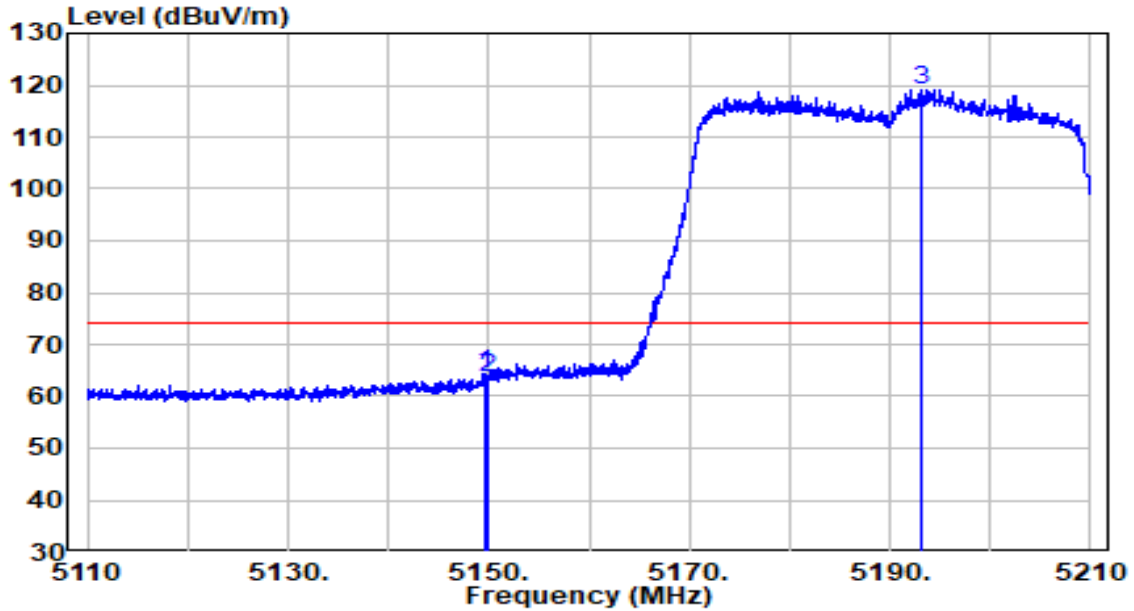


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5149.700	44.14	20.20	64.33	-9.67	74.00	Peak
2	5150.000	43.42	20.20	63.62	-10.38	74.00	Peak
3	* 5193.250	98.97	20.27	119.23	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	By PoE

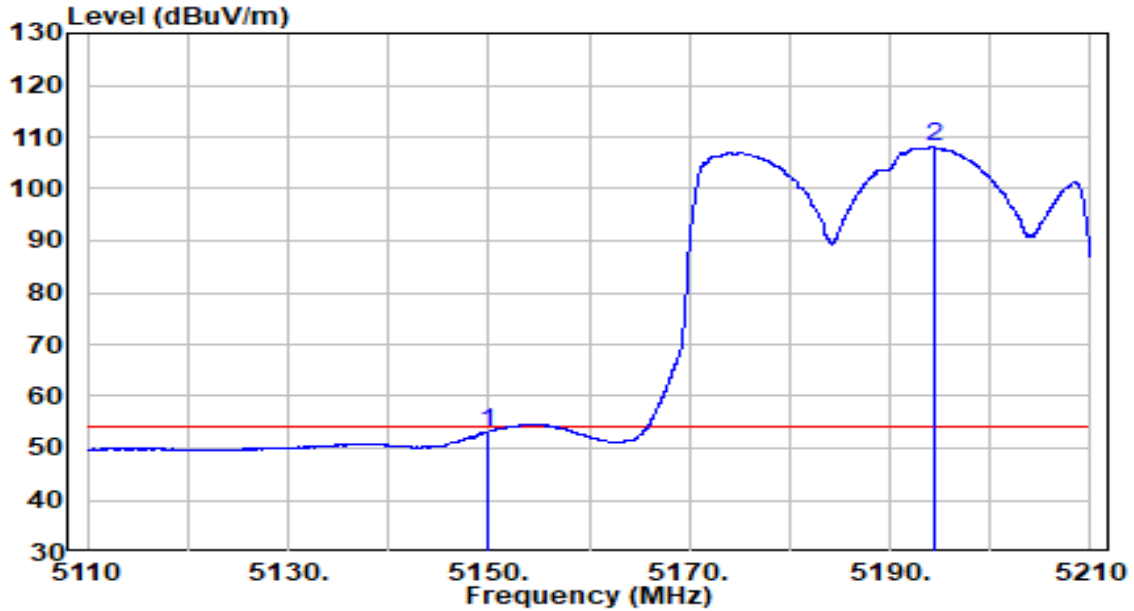


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5150.000	32.96	20.20	53.15	-0.85	54.00	Average
2	* 5194.350	87.71	20.27	107.98	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	By PoE

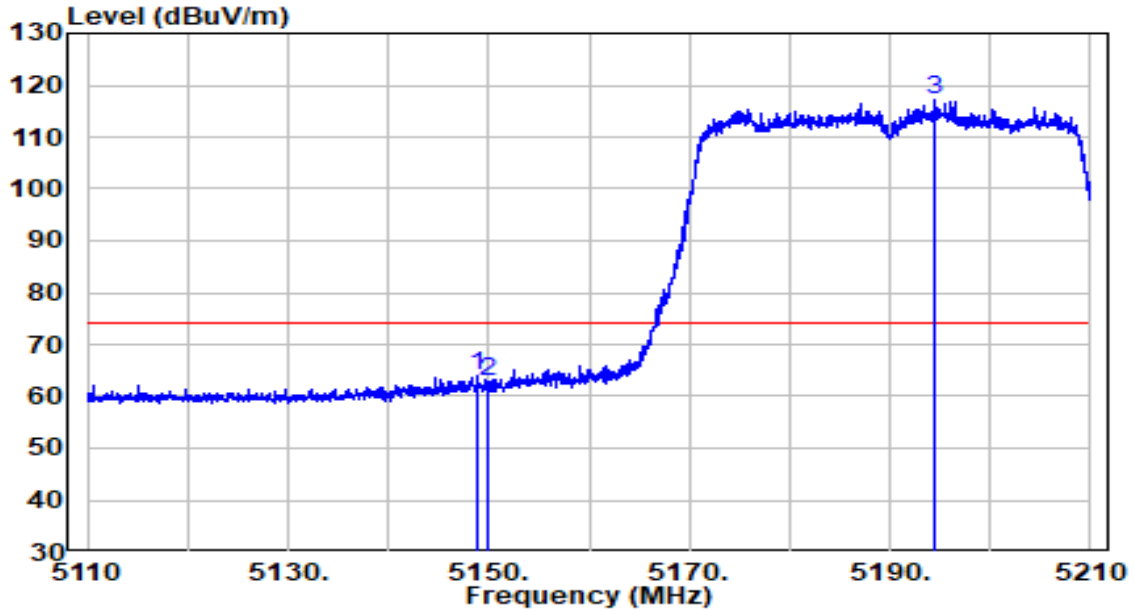


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5148.900	43.72	20.19	63.92	-10.08	74.00	Peak
2	5150.000	42.51	20.20	62.71	-11.29	74.00	Peak
3	* 5194.350	96.75	20.27	117.02	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	By PoE

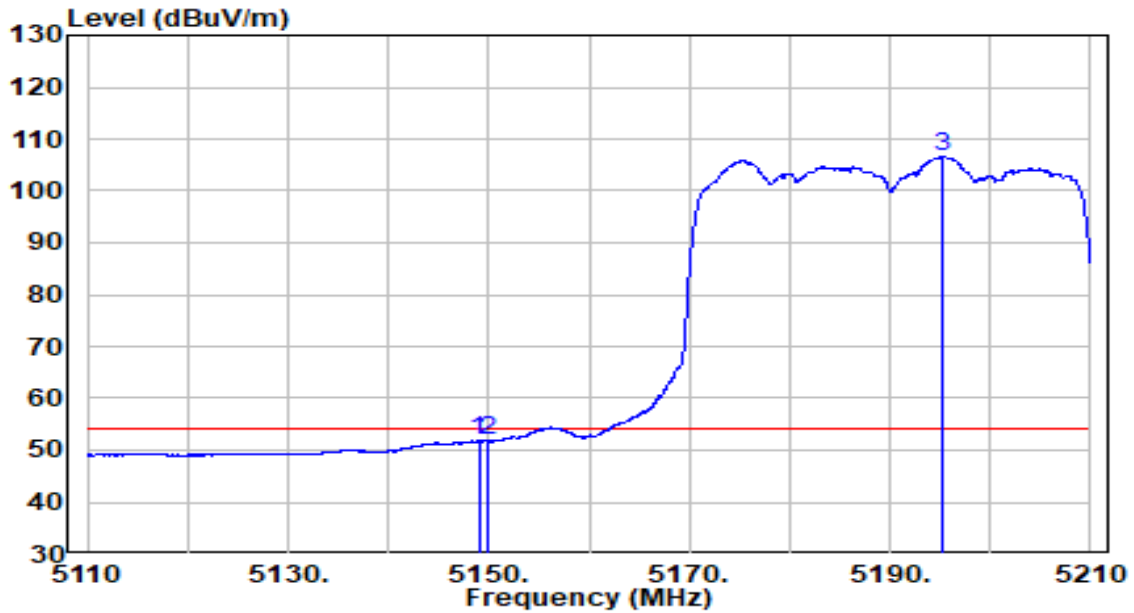


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5149.000	31.72	20.19	51.91	-2.09	54.00	Average
2	5150.000	31.51	20.20	51.70	-2.30	54.00	Average
3	* 5195.300	86.32	20.27	106.59	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz	Test Voltage	By PoE

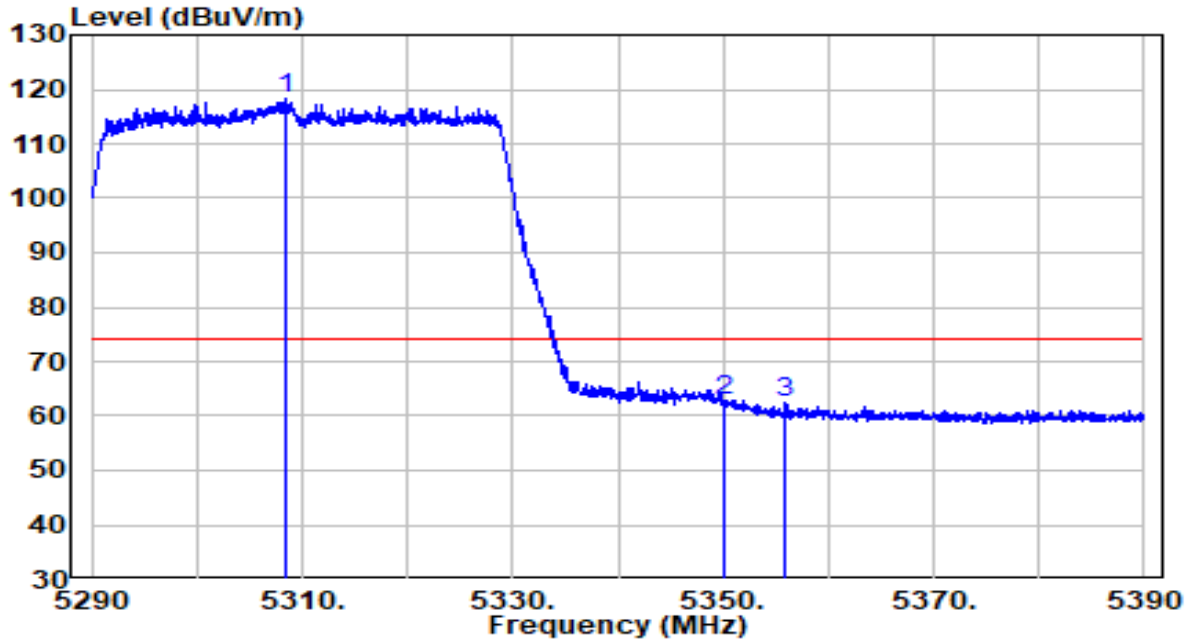


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5308.350	97.91	20.46	118.36	N/A	N/A	Peak
2	5350.000	42.24	20.52	62.76	-11.24	74.00	Peak
3	5355.850	41.92	20.53	62.45	-11.55	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz	Test Voltage	By PoE

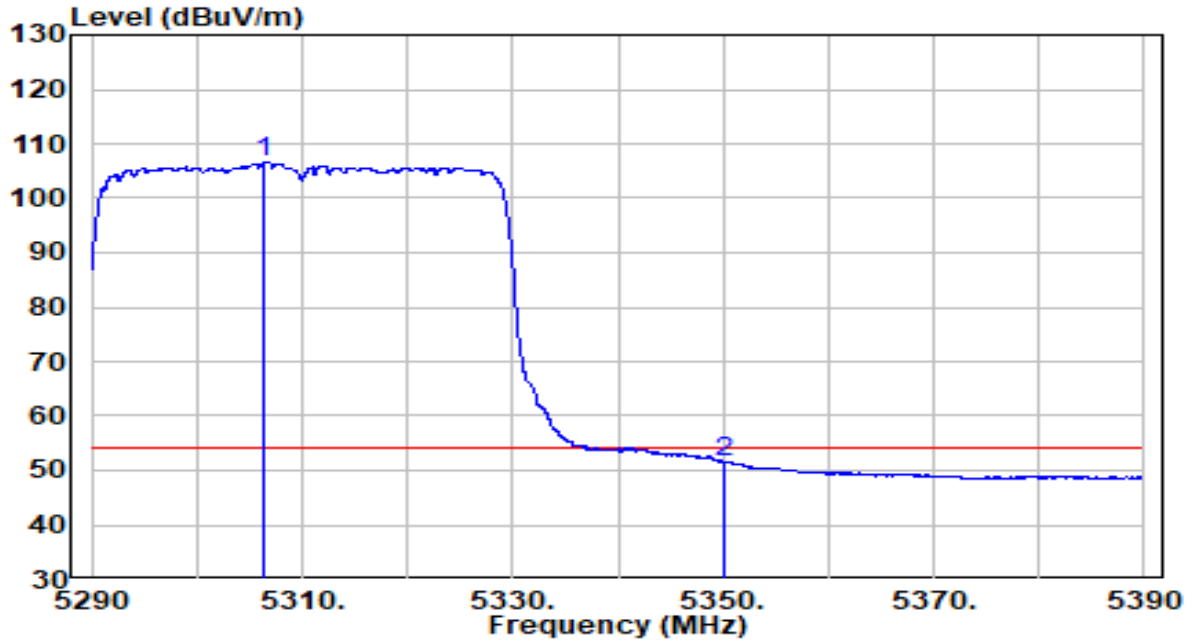


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5306.450	86.07	20.45	106.52	N/A	N/A	Average
2	5350.000	31.11	20.52	51.64	-2.36	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz	Test Voltage	By PoE

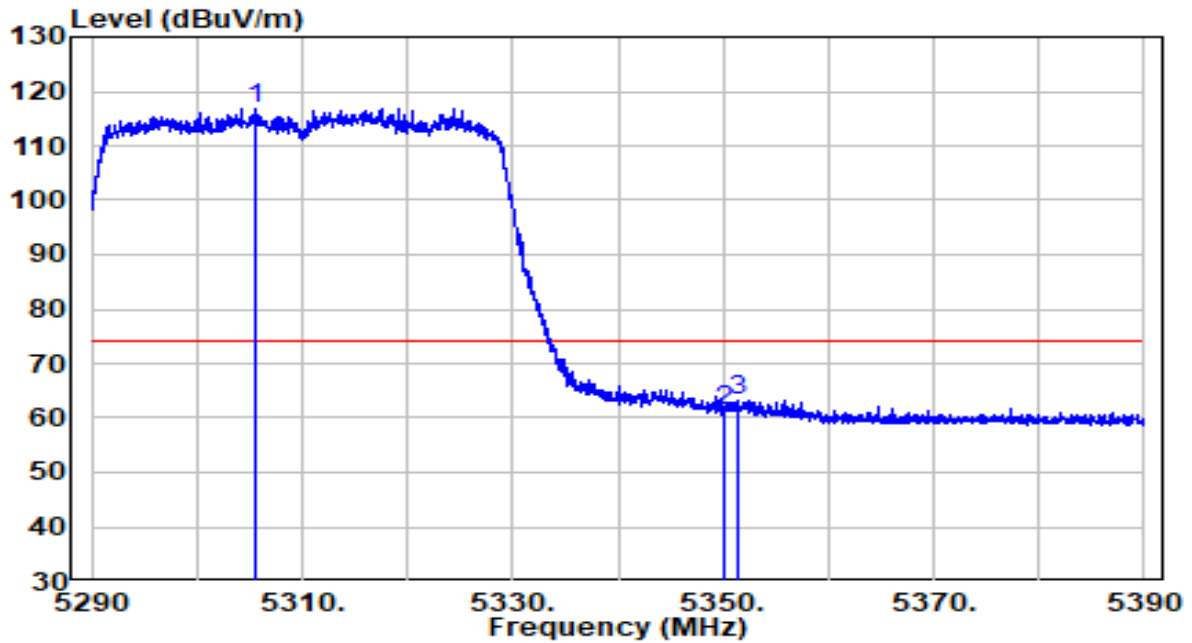


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	*	96.35	20.45	116.80	N/A	N/A	Peak
2		40.73	20.52	61.26	-12.74	74.00	Peak
3		42.76	20.53	63.29	-10.71	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz	Test Voltage	By PoE

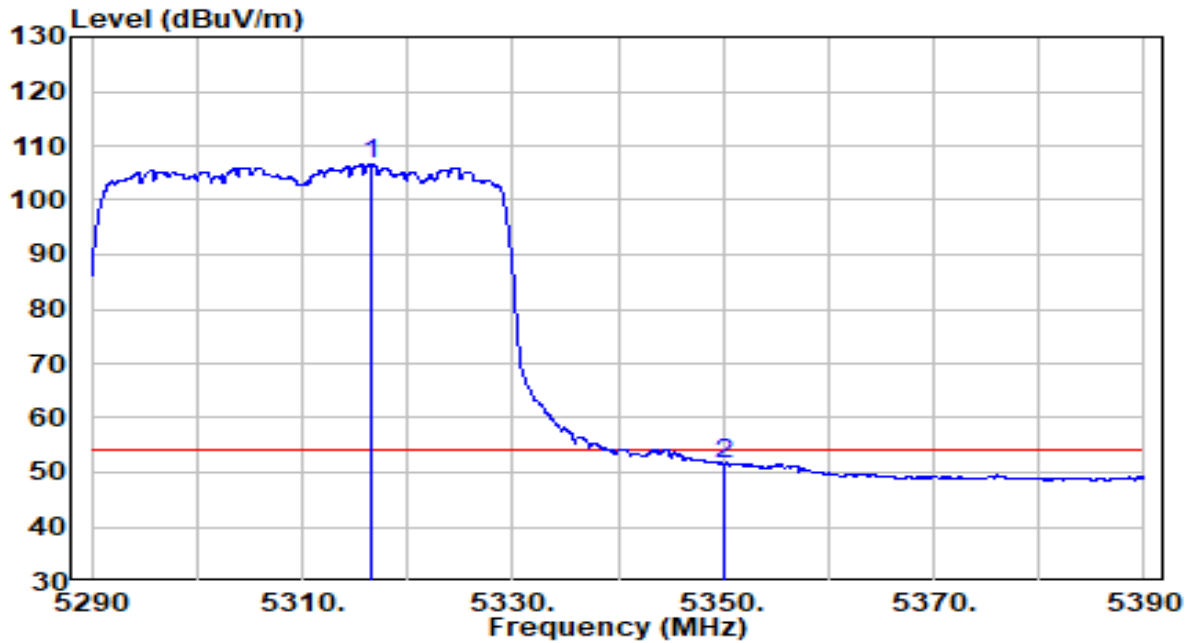


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	* 5316.600	86.03	20.47	106.50	N/A	N/A	Average
2	5350.000	31.12	20.52	51.64	-2.36	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz	Test Voltage	By PoE

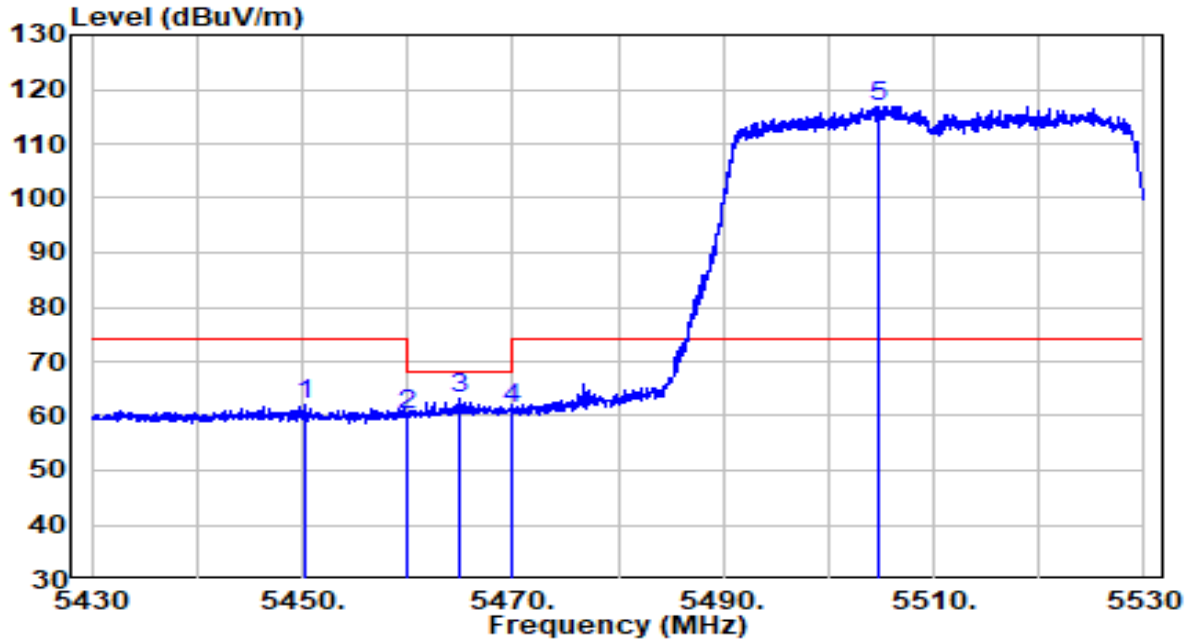


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	5450.150	41.45	20.69	62.14	-11.86	74.00	Peak
2	5460.000	39.50	20.70	60.20	-8.00	68.20	Peak
3	5464.850	42.64	20.71	63.35	-4.85	68.20	Peak
4	5470.000	40.52	20.72	61.24	-6.96	68.20	Peak
5	* 5504.700	96.08	20.79	116.86	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz	Test Voltage	By PoE

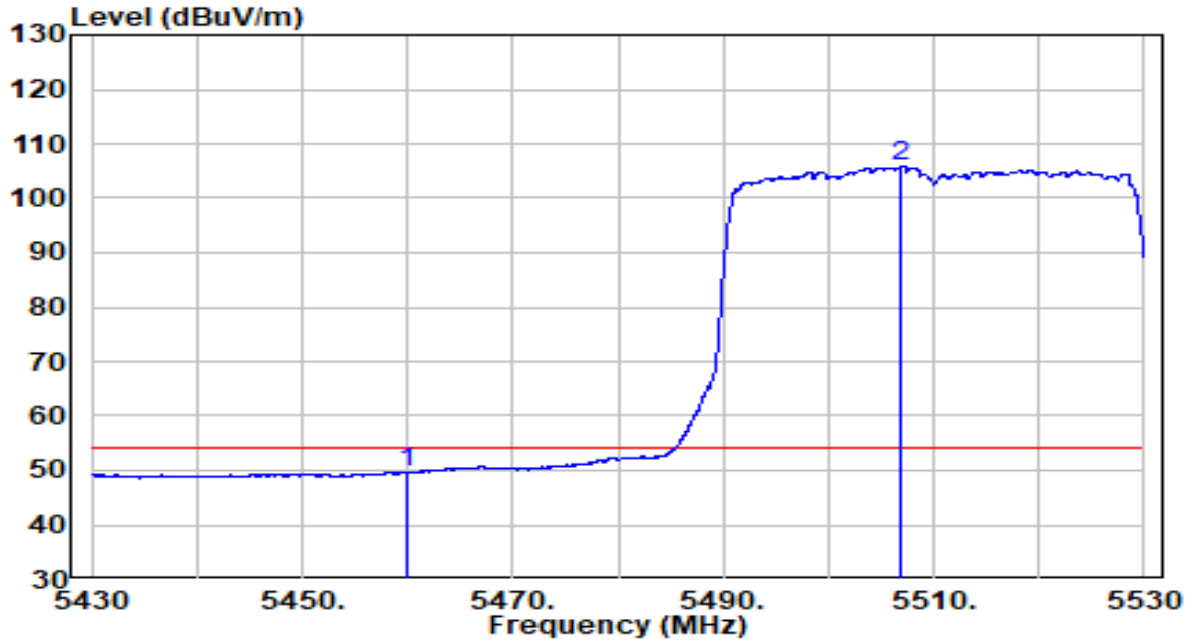


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	5460.000	28.86	20.70	49.57	-4.43	54.00	Average
2	* 5506.950	84.96	20.80	105.75	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz	Test Voltage	By PoE

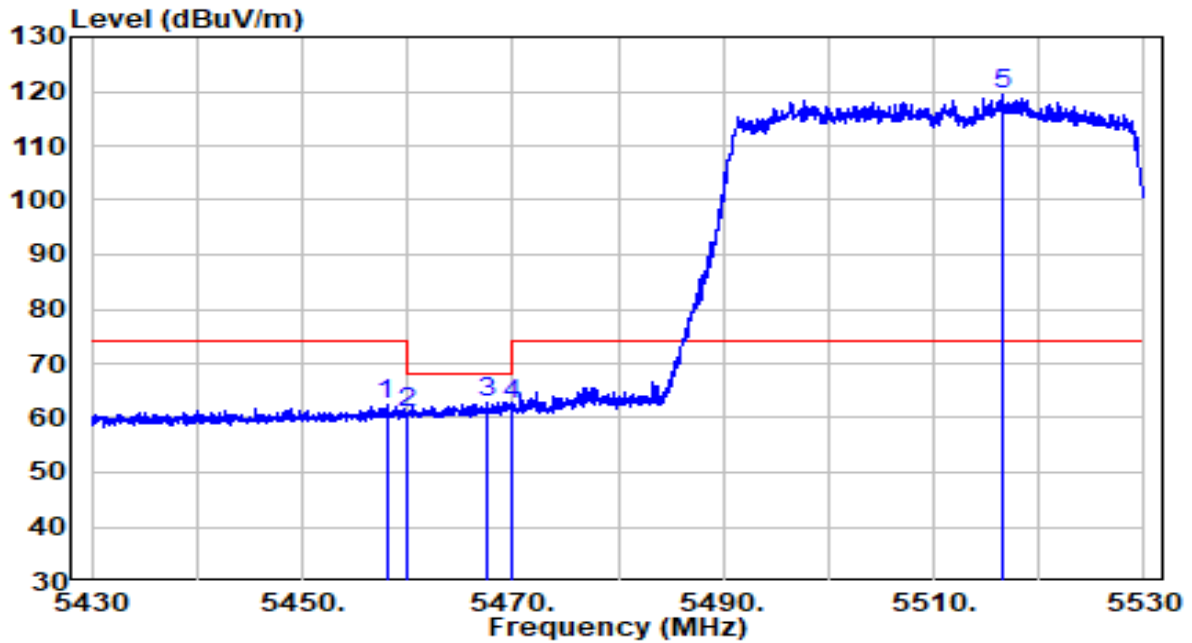


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5458.000	41.72	20.70	62.42	-11.58	74.00	Peak
2	5460.000	40.19	20.70	60.89	-7.31	68.20	Peak
3	5467.600	42.12	20.72	62.84	-5.36	68.20	Peak
4	5470.000	41.89	20.72	62.61	-5.59	68.20	Peak
5	* 5516.550	98.44	20.83	119.27	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz	Test Voltage	By PoE

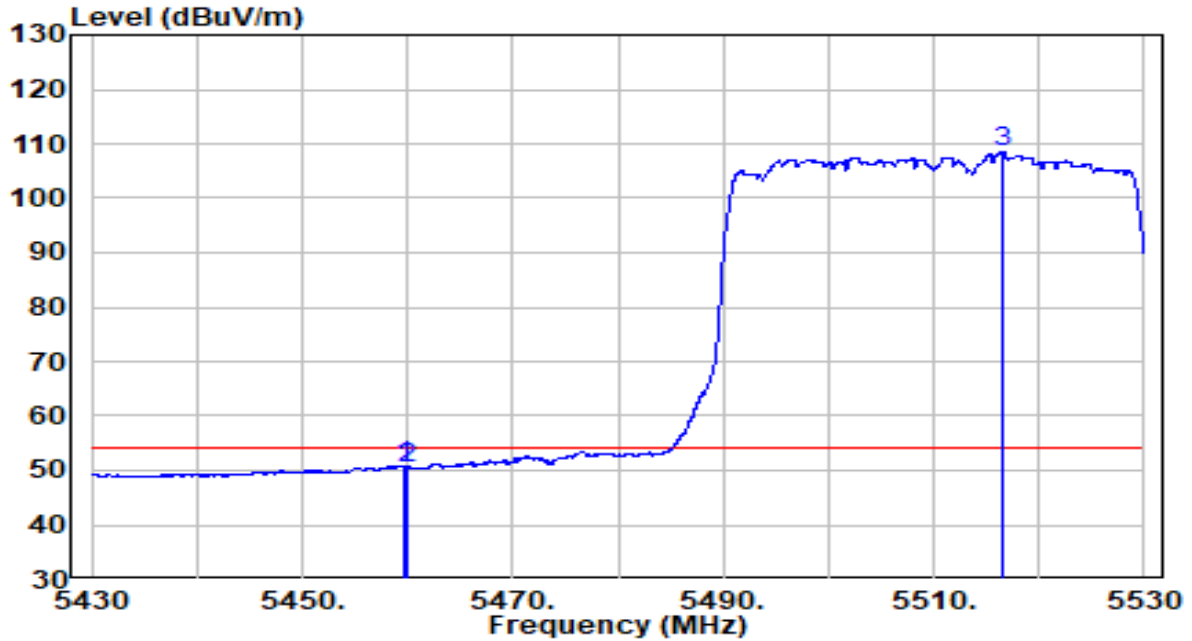


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5459.700	30.14	20.70	50.84	-3.16	54.00	Average
2	5460.000	29.84	20.70	50.54	-3.46	54.00	Average
3	* 5516.550	87.50	20.83	108.33	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz	Test Voltage	By PoE

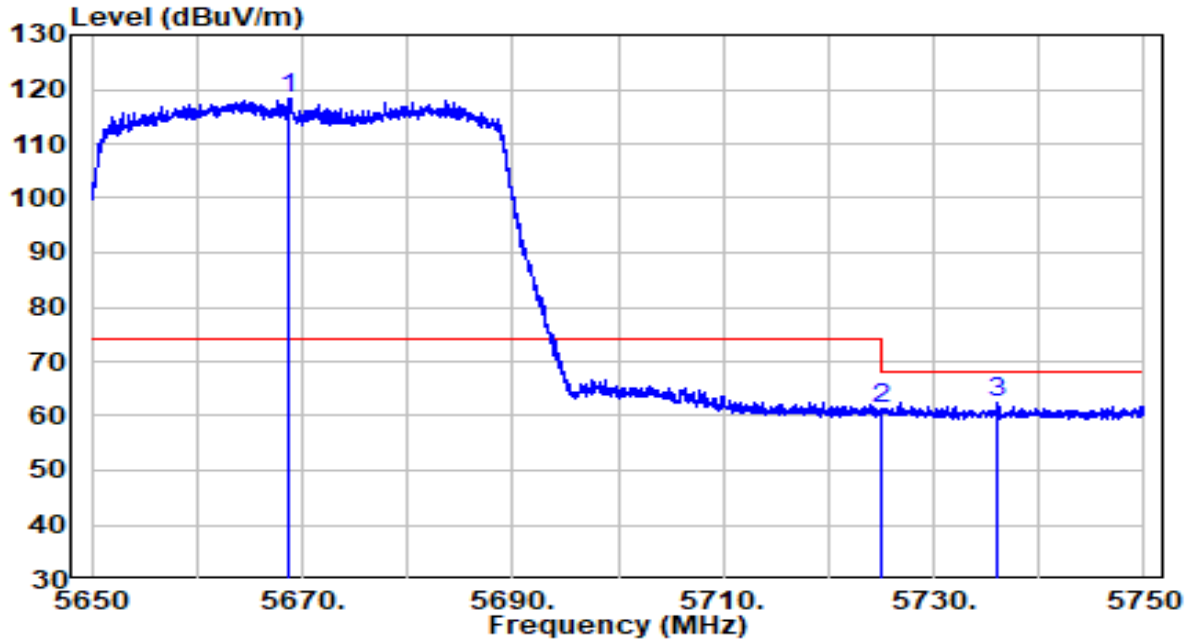


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5668.700	97.10	21.38	118.48	N/A	N/A	Peak
2	5725.000	39.57	21.59	61.16	-7.04	68.20	Peak
3	5735.950	40.66	21.63	62.29	-5.91	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz	Test Voltage	By PoE

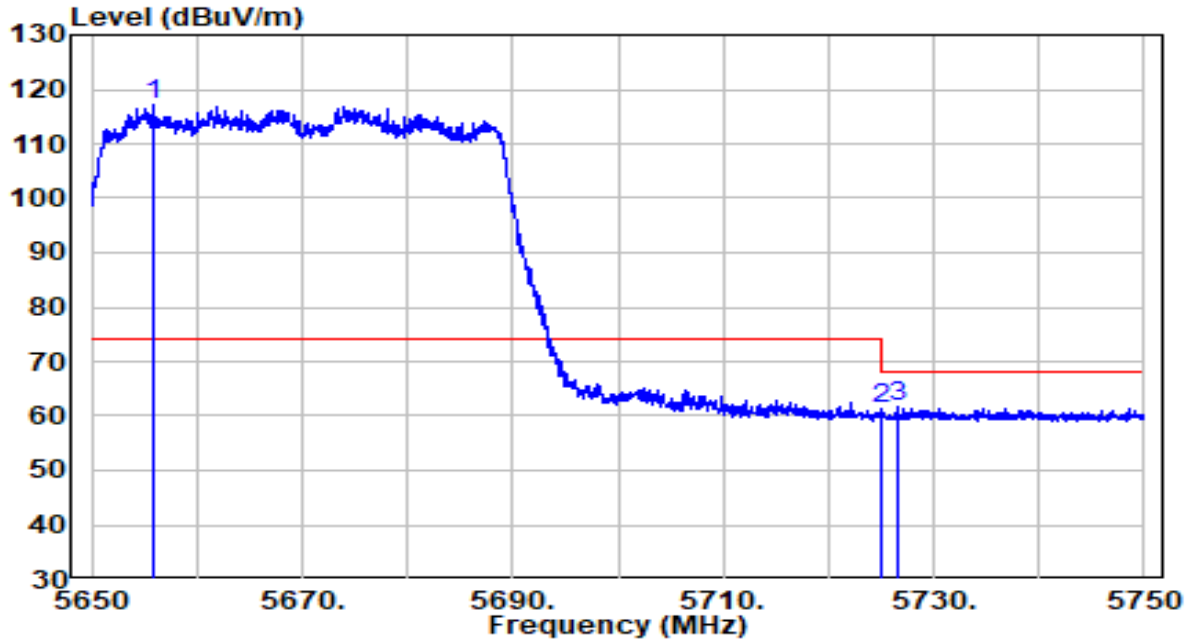


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	*	96.01	21.34	117.35	N/A	N/A	Peak
2		39.86	21.59	61.45	-6.75	68.20	Peak
3		39.98	21.60	61.57	-6.63	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5755MHz	Test Voltage	By PoE

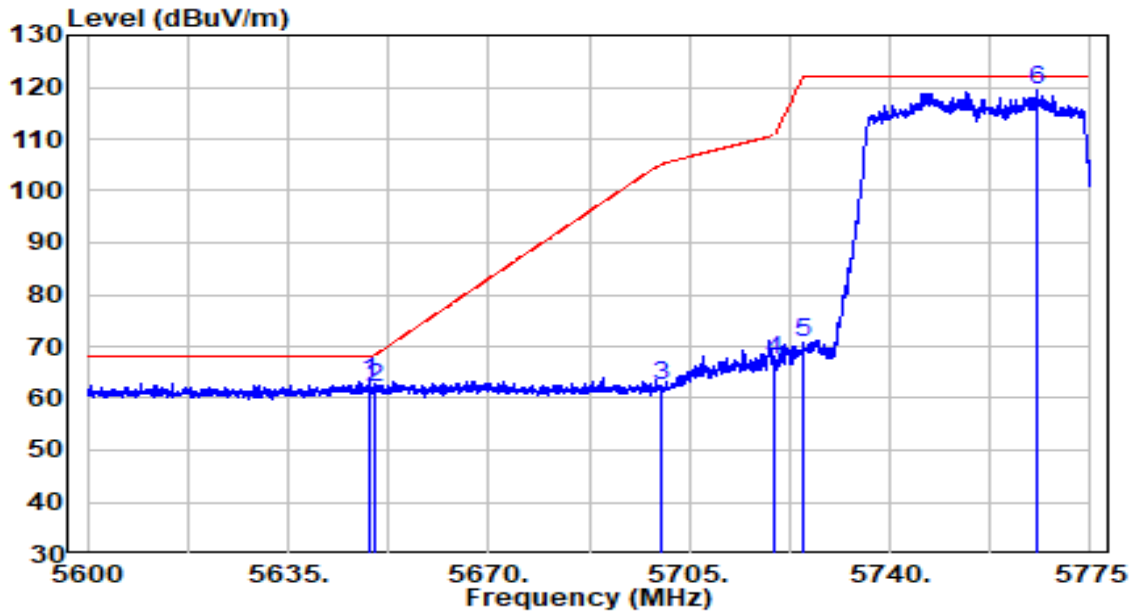


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5649.087	41.97	21.31	63.29	-4.91	68.20	Peak
2	5650.000	40.62	21.32	61.93	-6.27	68.20	Peak
3	5700.000	40.77	21.50	62.27	-42.93	105.20	Peak
4	5720.000	45.91	21.57	67.48	-43.32	110.80	Peak
5	5725.000	49.17	21.59	70.76	-51.44	122.20	Peak
6	* 5765.725	97.52	21.74	119.25	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5755MHz	Test Voltage	By PoE

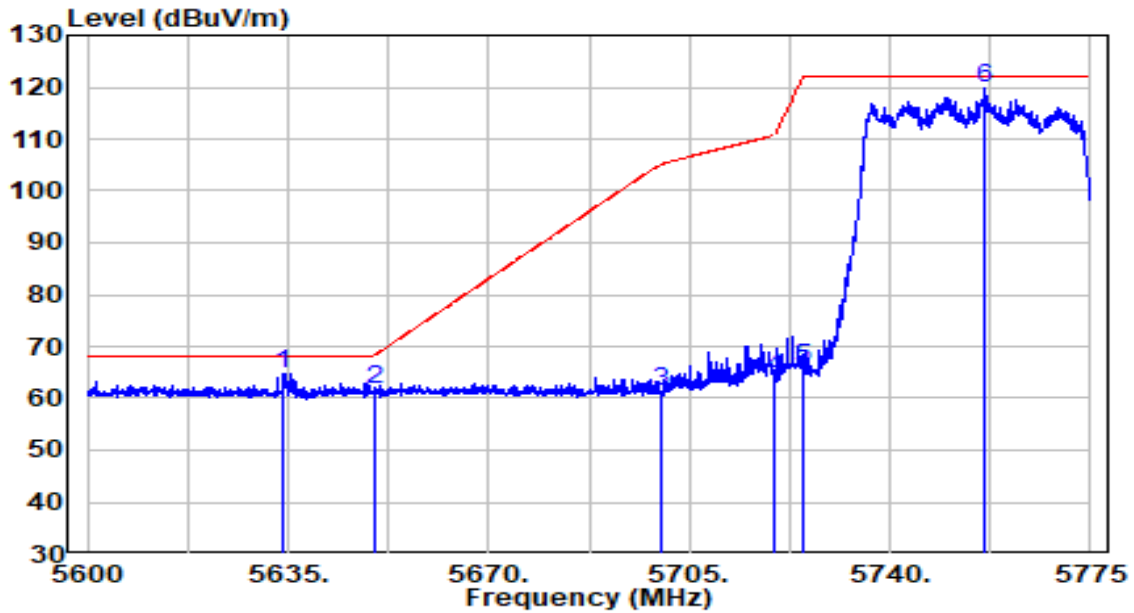


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5634.125	43.52	21.26	64.77	-3.43	68.20	Peak
2	5650.000	40.22	21.32	61.54	-6.66	68.20	Peak
3	5700.000	39.81	21.50	61.31	-43.89	105.20	Peak
4	5720.000	42.40	21.57	63.97	-46.83	110.80	Peak
5	5725.000	44.32	21.59	65.91	-56.29	122.20	Peak
6	* 5756.625	98.02	21.70	119.72	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5795MHz	Test Voltage	By PoE

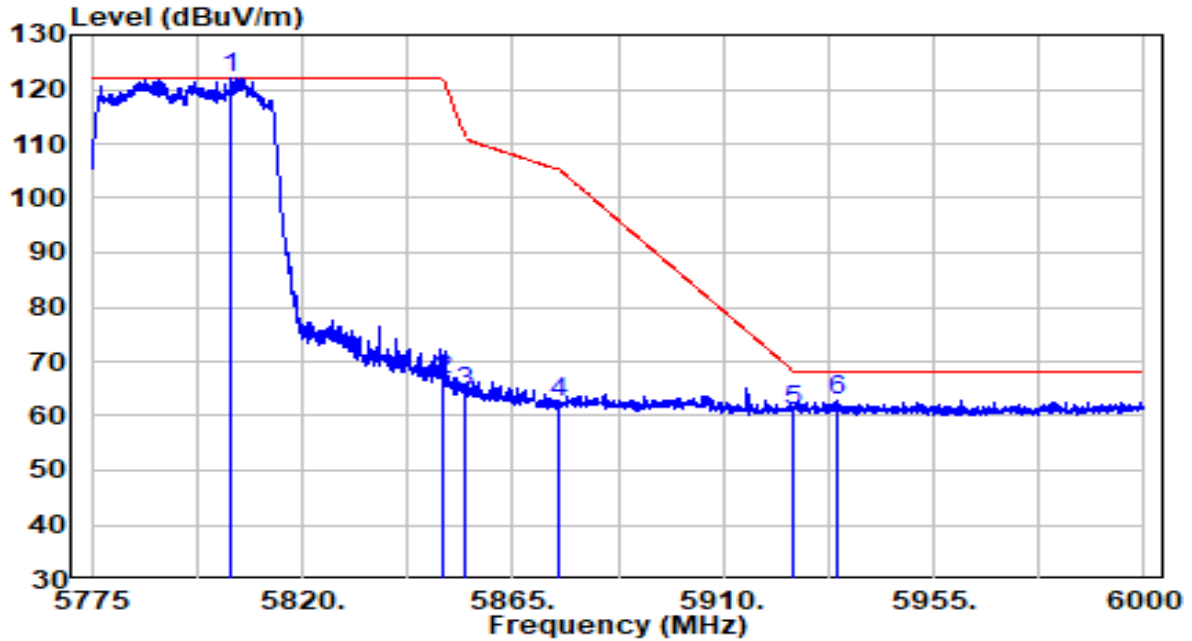


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5804.587	100.34	21.88	122.22	N/A	N/A	Peak
2	5850.000	44.74	22.04	66.79	-55.41	122.20	Peak
3	5855.000	42.29	22.06	64.35	-46.45	110.80	Peak
4	5875.000	40.37	22.14	62.50	-42.70	105.20	Peak
5	5925.000	38.77	22.32	61.09	-7.11	68.20	Peak
6	5934.300	40.51	22.35	62.86	-5.34	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5795MHz	Test Voltage	By PoE

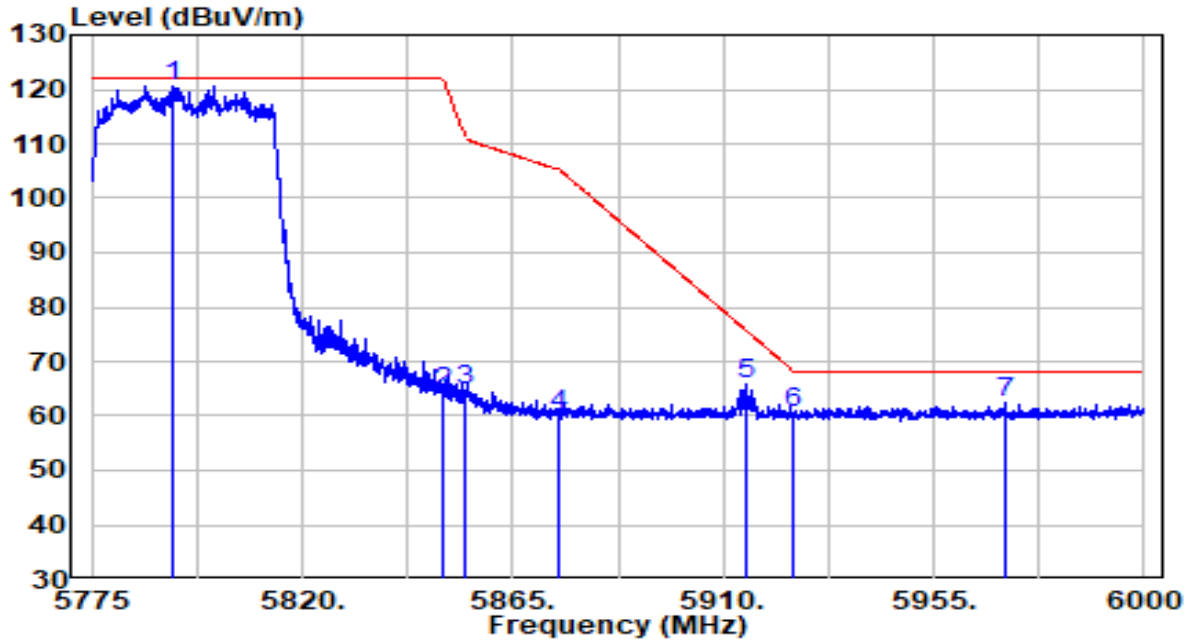


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	*	98.89	21.83	120.72	N/A	N/A	Peak
2	5850.000	42.44	22.04	64.48	-57.72	122.20	Peak
3	5855.000	42.64	22.06	64.71	-46.09	110.80	Peak
4	5875.000	38.24	22.14	60.37	-44.83	105.20	Peak
5	5915.175	43.56	22.28	65.84	-9.61	75.45	Peak
6	5925.000	38.21	22.32	60.53	-7.67	68.20	Peak
7	5970.188	39.92	22.48	62.40	-5.80	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	By PoE

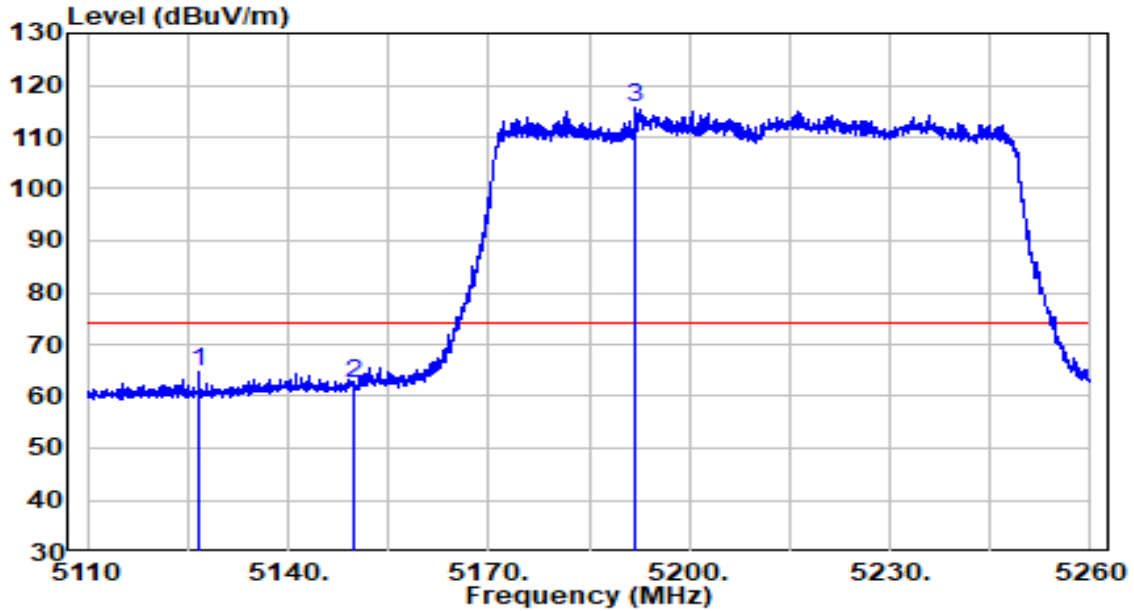


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5126.575	44.45	20.16	64.60	-9.40	74.00	Peak
2	5150.000	42.34	20.20	62.53	-11.47	74.00	Peak
3	* 5191.975	95.23	20.26	115.49	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	By PoE

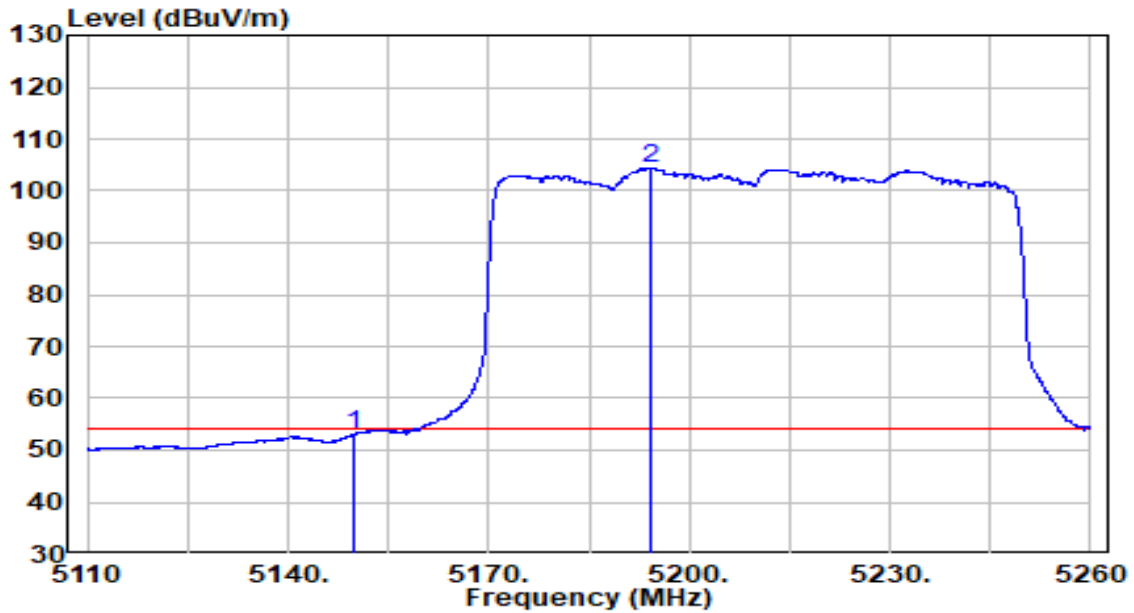


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5150.000	32.81	20.20	53.01	-0.99	54.00	Average
2	* 5194.075	84.04	20.27	104.31	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	By PoE

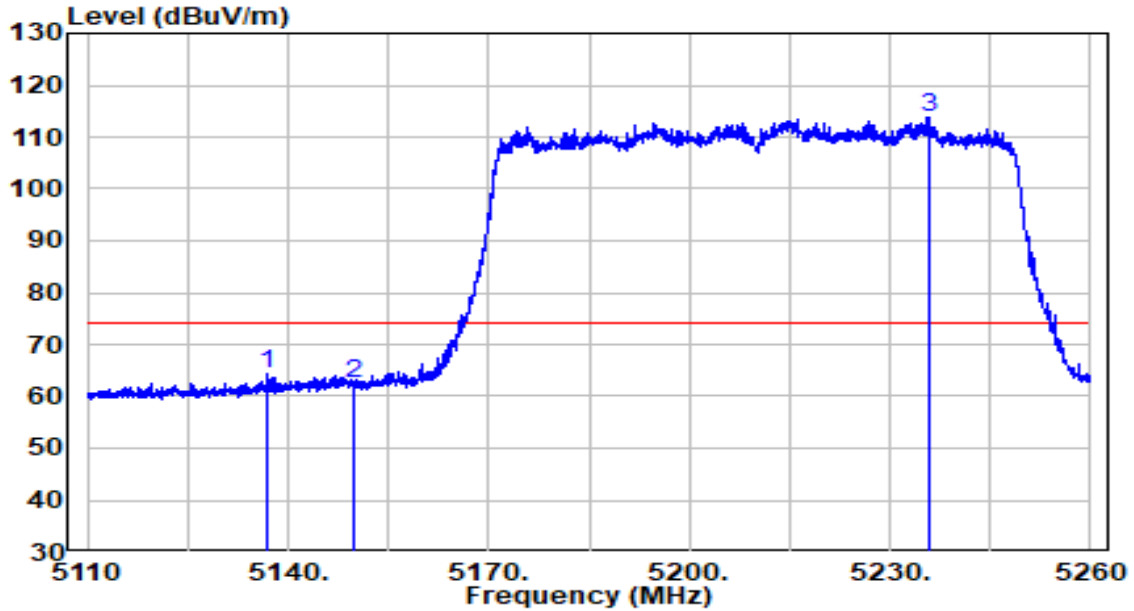


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5136.775	44.30	20.17	64.47	-9.53	74.00	Peak
2	5150.000	42.18	20.20	62.37	-11.63	74.00	Peak
3	* 5235.850	93.42	20.34	113.76	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	By PoE

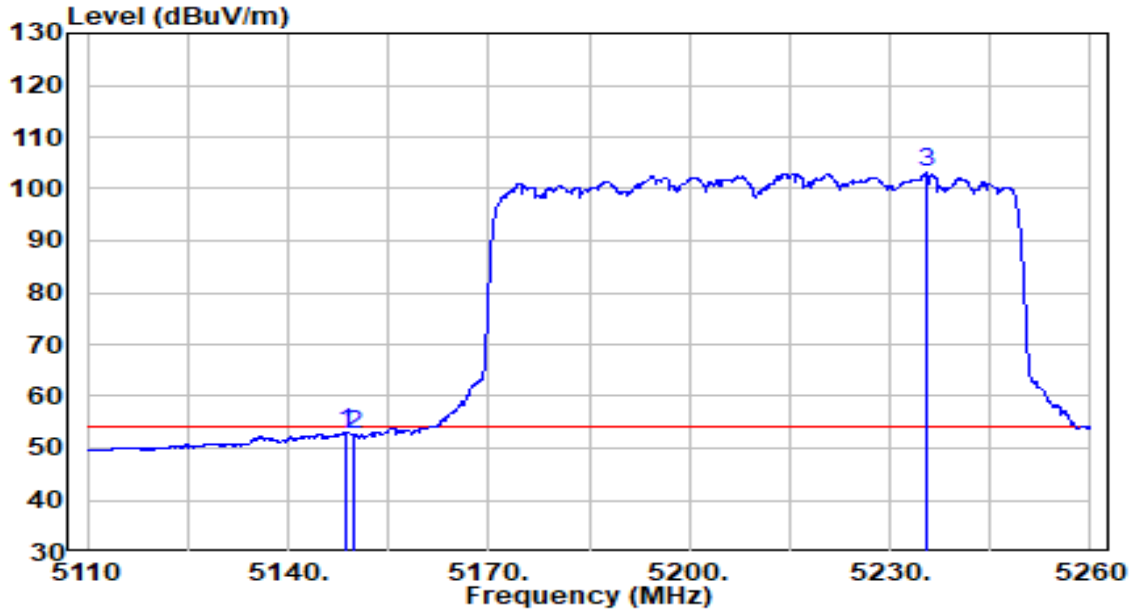


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5148.625	32.88	20.19	53.07	-0.93	54.00	Average
2	5150.000	32.27	20.20	52.46	-1.54	54.00	Average
3	* 5235.625	82.68	20.34	103.02	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz	Test Voltage	By PoE

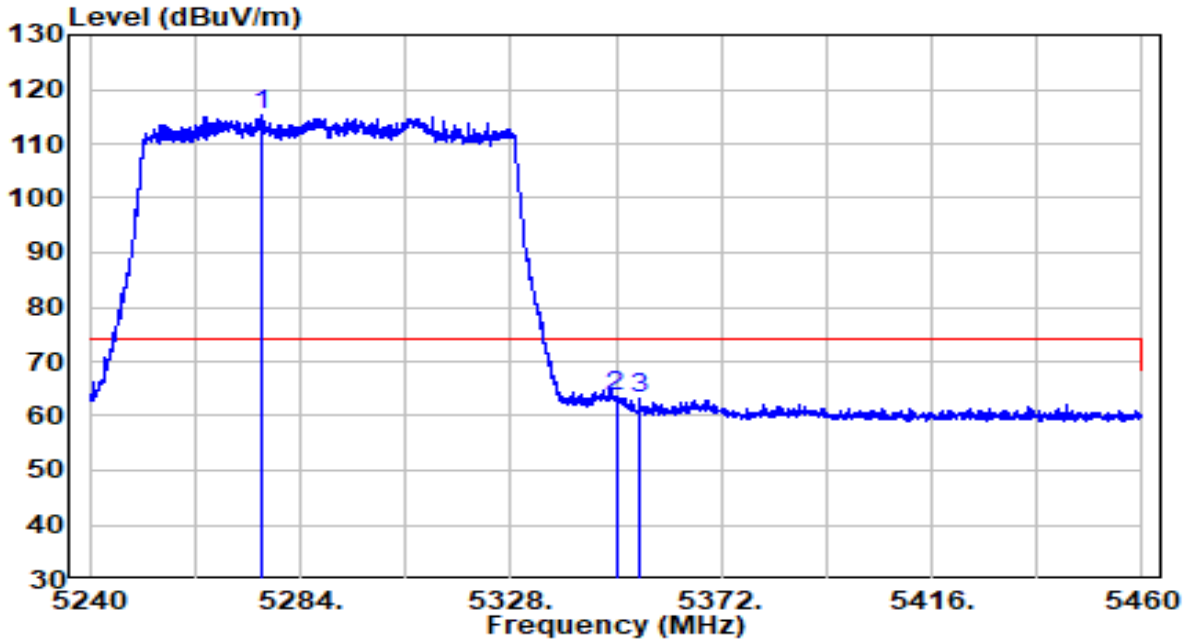


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	*	94.70	20.40	115.10	N/A	N/A	Peak
2		42.90	20.52	63.43	-10.57	74.00	Peak
3		42.60	20.53	63.13	-10.87	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz	Test Voltage	By PoE

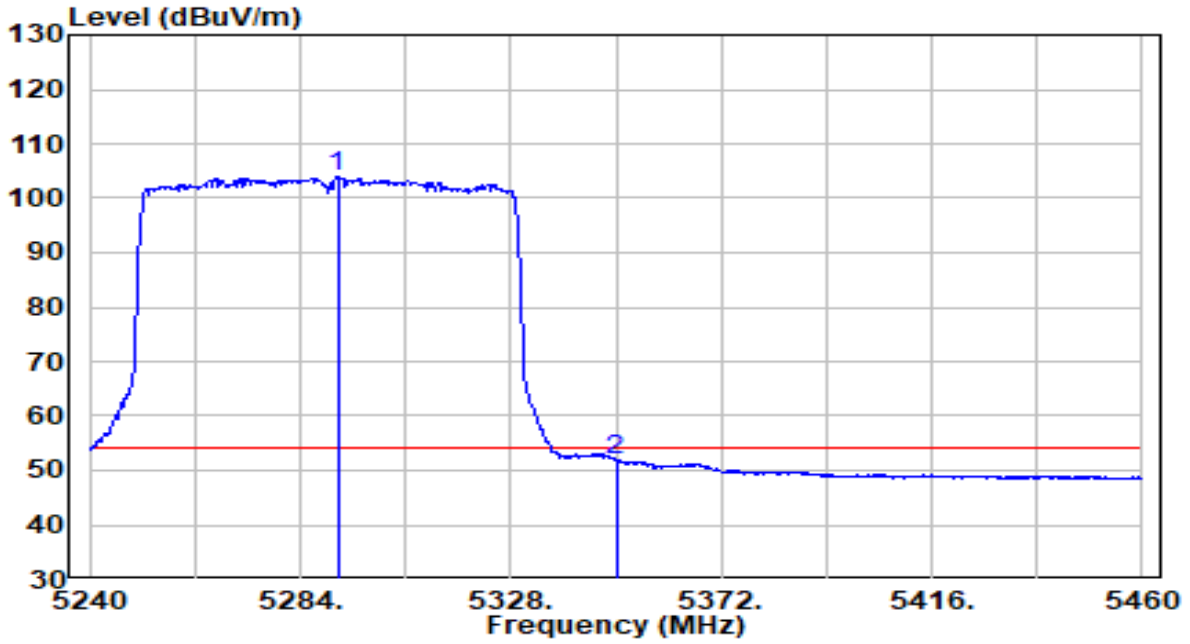


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	* 5291.810	83.36	20.43	103.79	N/A	N/A	Average
2	5350.000	31.39	20.52	51.91	-2.09	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz	Test Voltage	By PoE

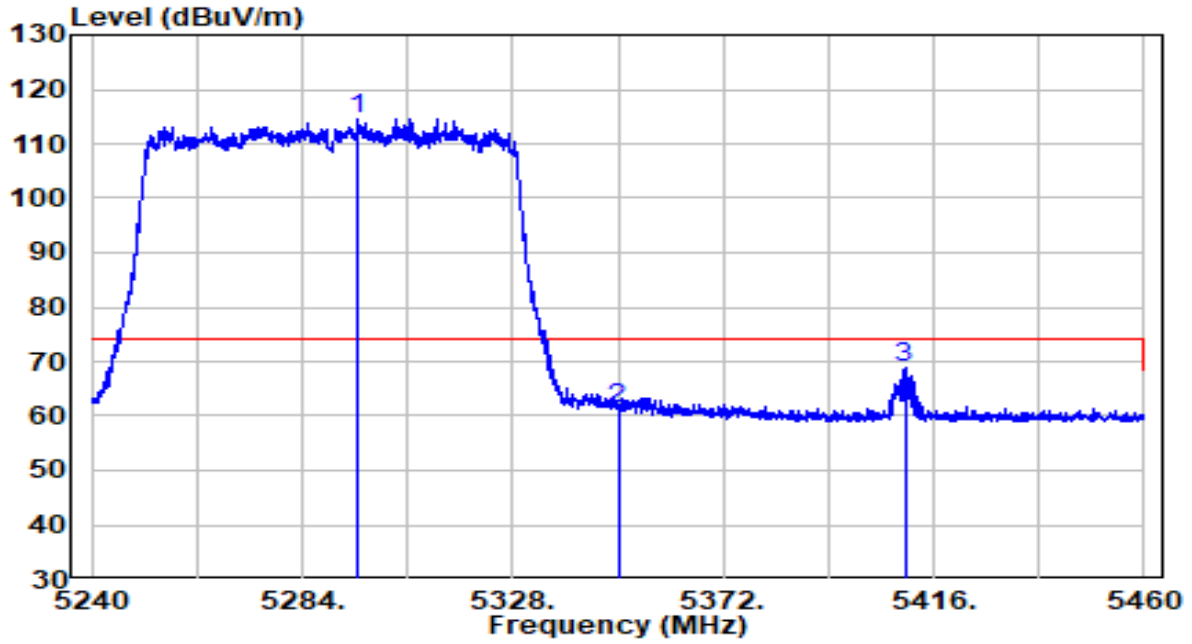


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	*	94.14	20.43	114.58	N/A	N/A	Peak
2		40.86	20.52	61.38	-12.62	74.00	Peak
3		48.21	20.62	68.83	-5.17	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz	Test Voltage	By PoE

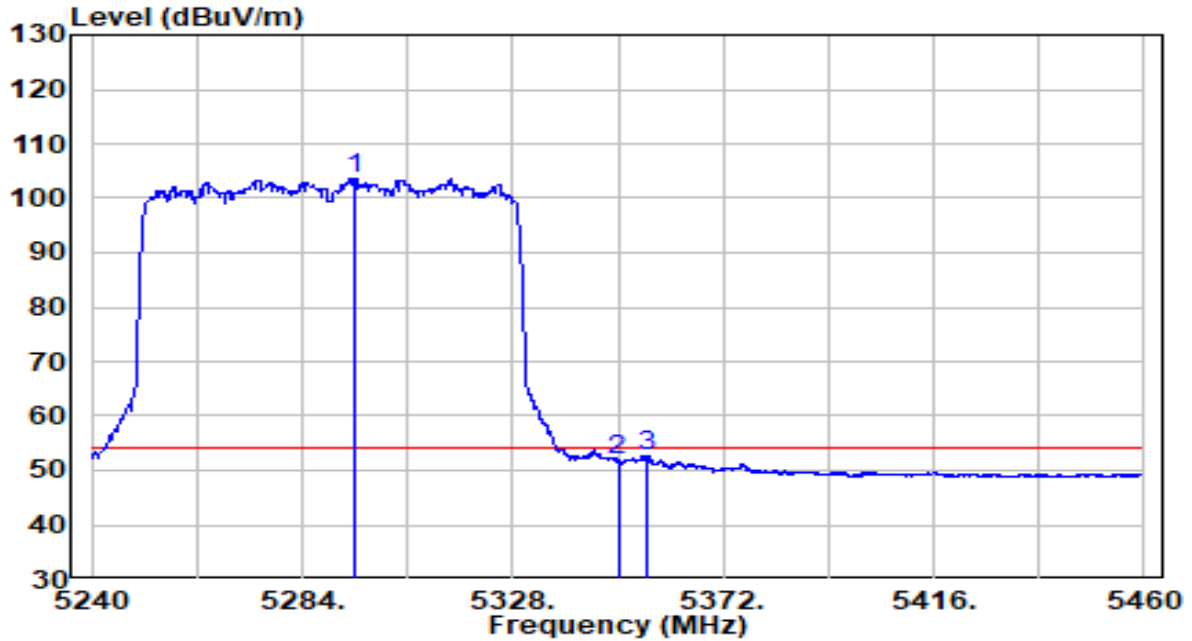


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	*	83.23	20.43	103.66	N/A	N/A	Average
2		31.22	20.52	51.75	-2.25	54.00	Average
3		32.13	20.53	52.66	-1.34	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz	Test Voltage	By PoE

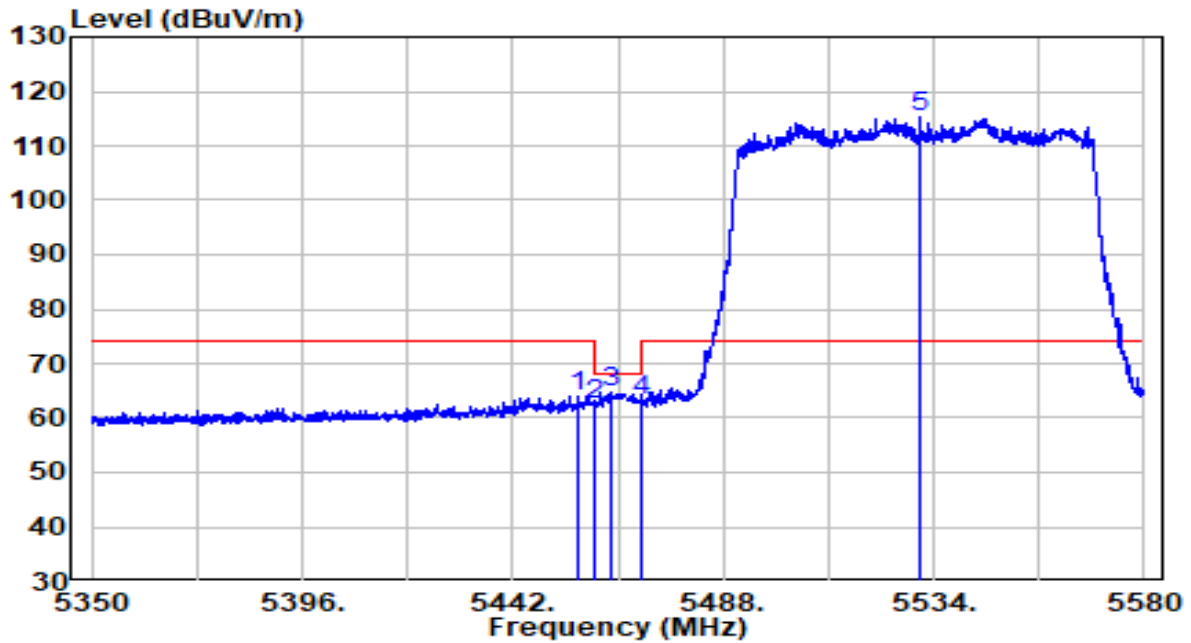


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5456.490	43.35	20.70	64.05	-9.95	74.00	Peak
2	5460.000	41.69	20.70	62.39	-5.81	68.20	Peak
3	5463.390	43.85	20.71	64.56	-3.64	68.20	Peak
4	5470.000	42.33	20.72	63.05	-5.15	68.20	Peak
5	* 5531.010	94.45	20.88	115.33	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz	Test Voltage	By PoE

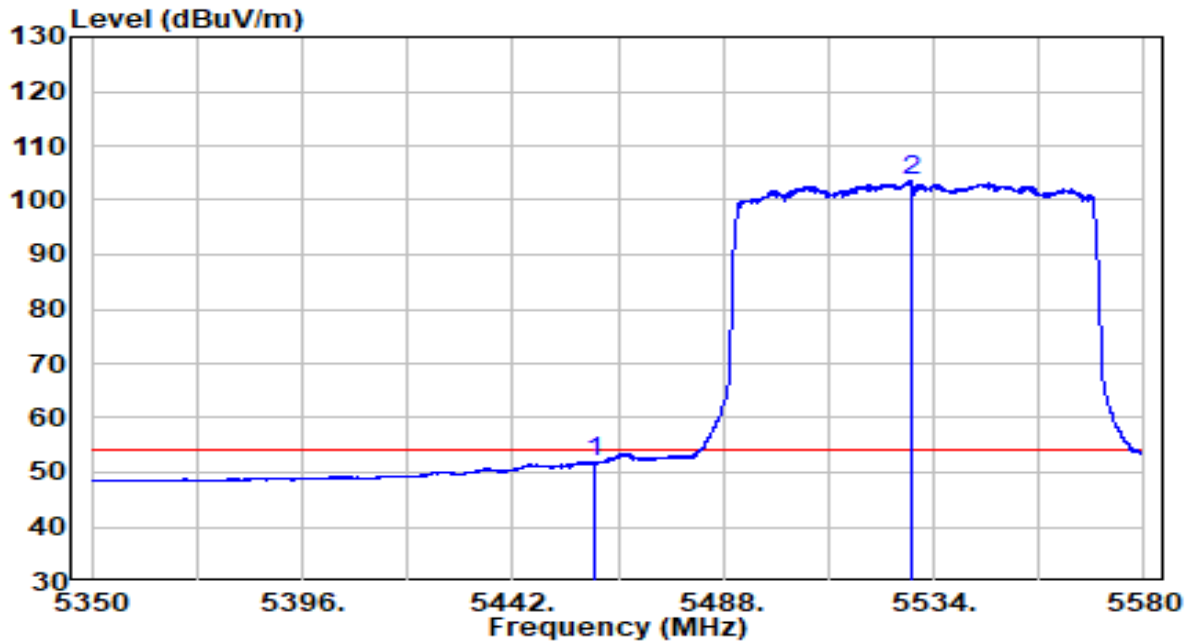


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	5460.000	31.03	20.70	51.74	-2.26	54.00	Average
2	* 5529.055	82.71	20.88	103.58	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz	Test Voltage	By PoE

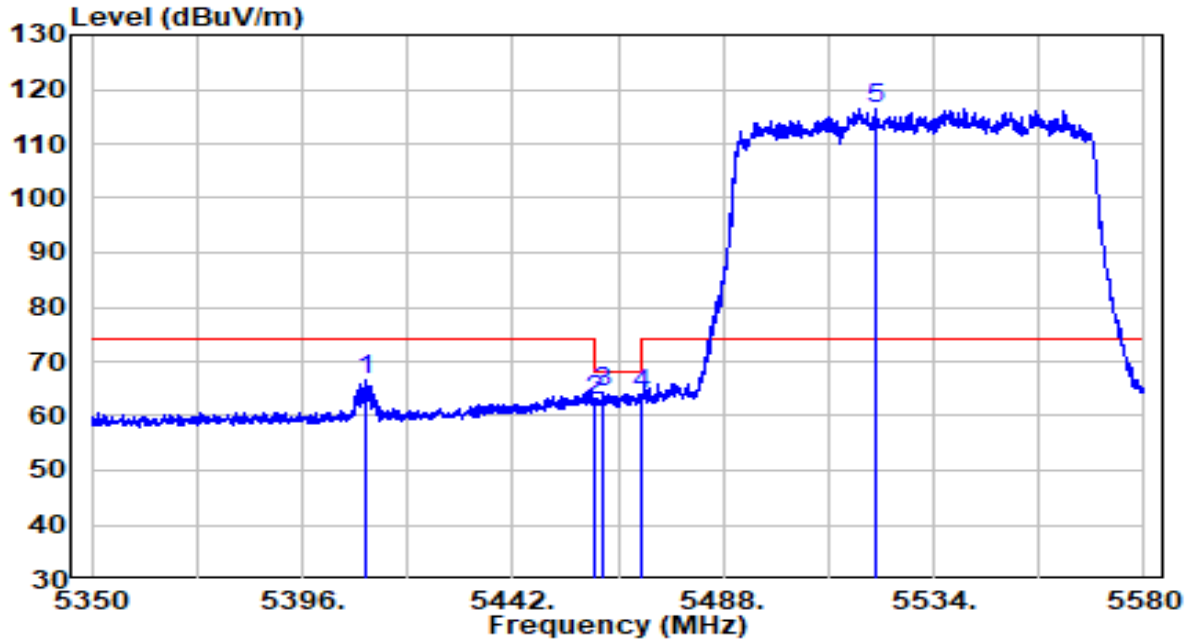


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5410.145	46.11	20.62	66.73	-7.27	74.00	Peak
2	5460.000	42.11	20.70	62.81	-5.39	68.20	Peak
3	5461.895	43.69	20.71	64.40	-3.80	68.20	Peak
4	5470.000	43.14	20.72	63.87	-4.33	68.20	Peak
5	* 5521.120	95.72	20.85	116.56	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz	Test Voltage	By PoE

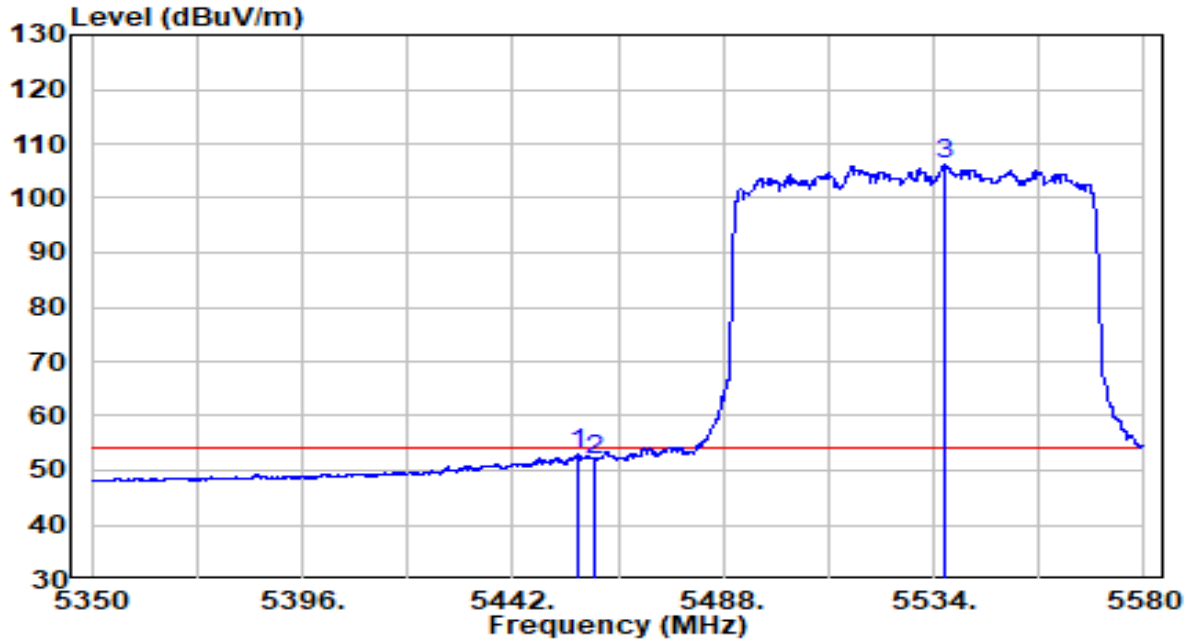


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5456.375	32.20	20.70	52.90	-1.10	54.00	Average
2	5460.000	31.36	20.70	52.06	-1.94	54.00	Average
3	* 5536.415	85.22	20.90	106.12	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5610MHz	Test Voltage	By PoE

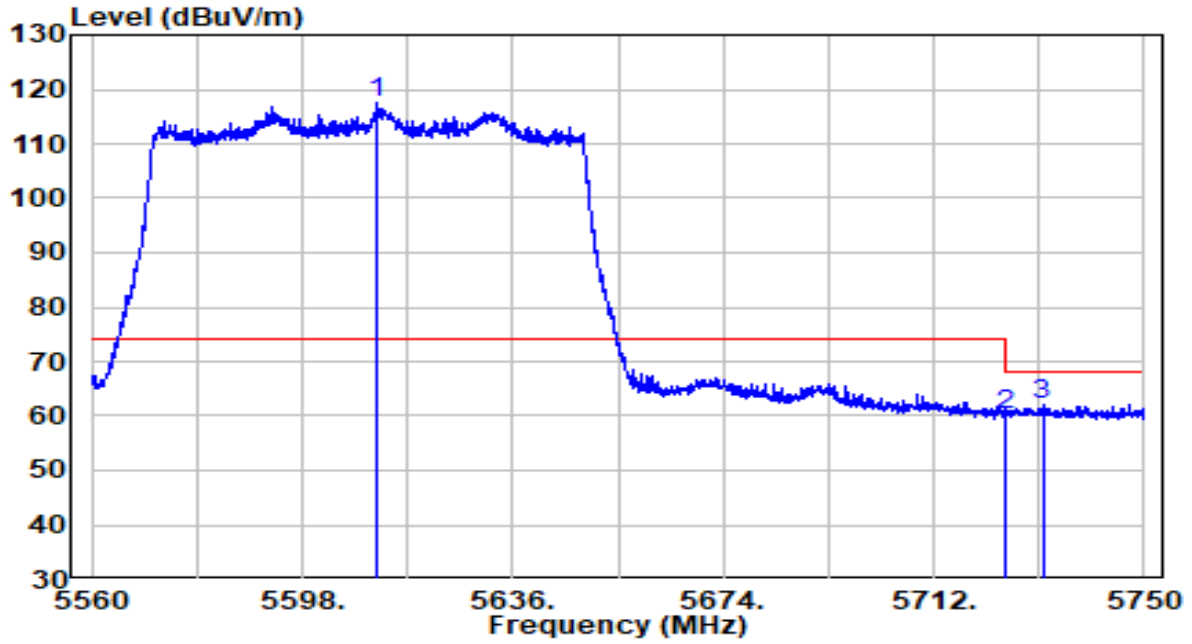


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5611.490	96.43	21.18	117.60	N/A	N/A	Peak
2	5725.000	38.66	21.59	60.25	-7.95	68.20	Peak
3	5731.665	40.34	21.61	61.96	-6.24	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-14
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5610MHz	Test Voltage	By PoE

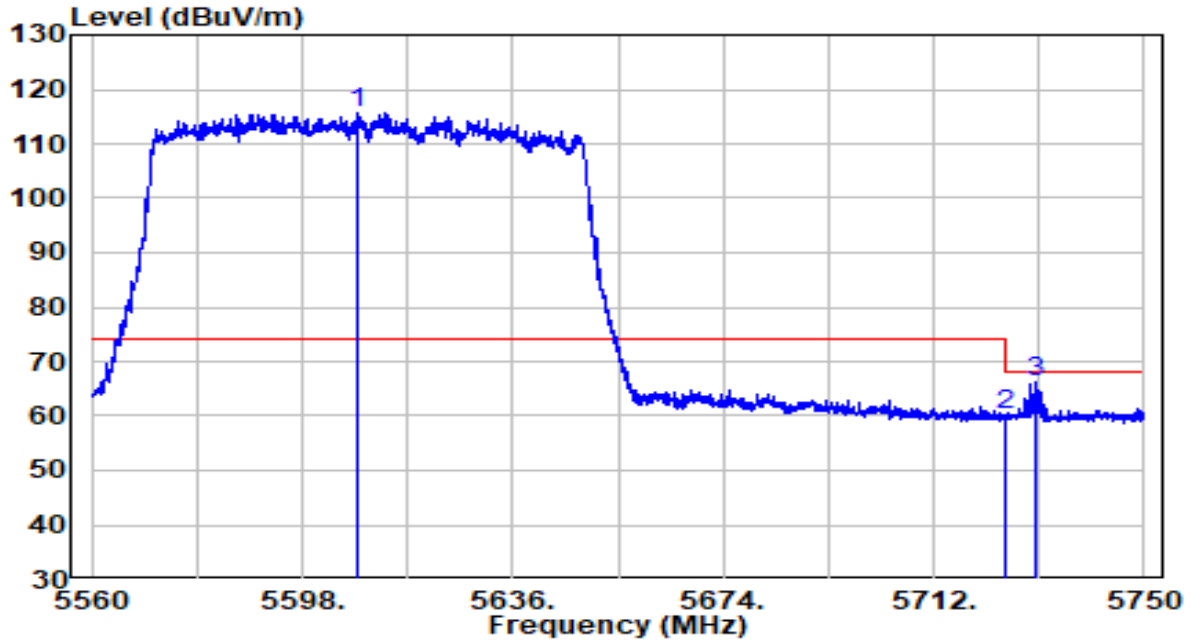


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5607.785	94.35	21.16	115.51	N/A	N/A	Peak
2	5725.000	38.51	21.59	60.10	-8.10	68.20	Peak
3	5730.430	44.47	21.61	66.07	-2.13	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz	Test Voltage	By PoE

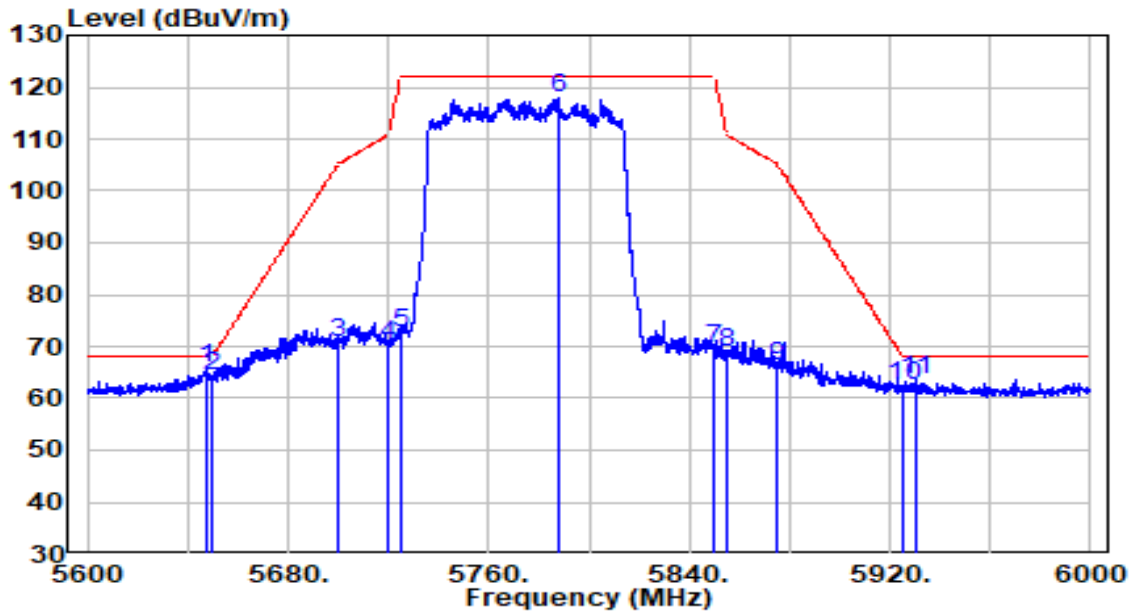


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5647.800	44.71	21.31	66.02	-2.18	68.20	Peak
2	5650.000	43.18	21.32	64.49	-3.71	68.20	Peak
3	5700.000	49.28	21.50	70.77	-34.43	105.20	Peak
4	5720.000	48.85	21.57	70.42	-40.38	110.80	Peak
5	5725.000	51.04	21.59	72.63	-49.57	122.20	Peak
6	5787.800	96.05	21.82	117.86	N/A	N/A	Peak
7	5850.000	47.66	22.04	69.70	-52.50	122.20	Peak
8	5855.000	46.72	22.06	68.79	-42.01	110.80	Peak
9	5875.000	44.02	22.14	66.15	-39.05	105.20	Peak
10	5925.000	40.17	22.32	62.49	-5.71	68.20	Peak
11	5930.000	41.14	22.34	63.47	-4.73	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-18
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	24.4°C/46.7%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz	Test Voltage	By PoE

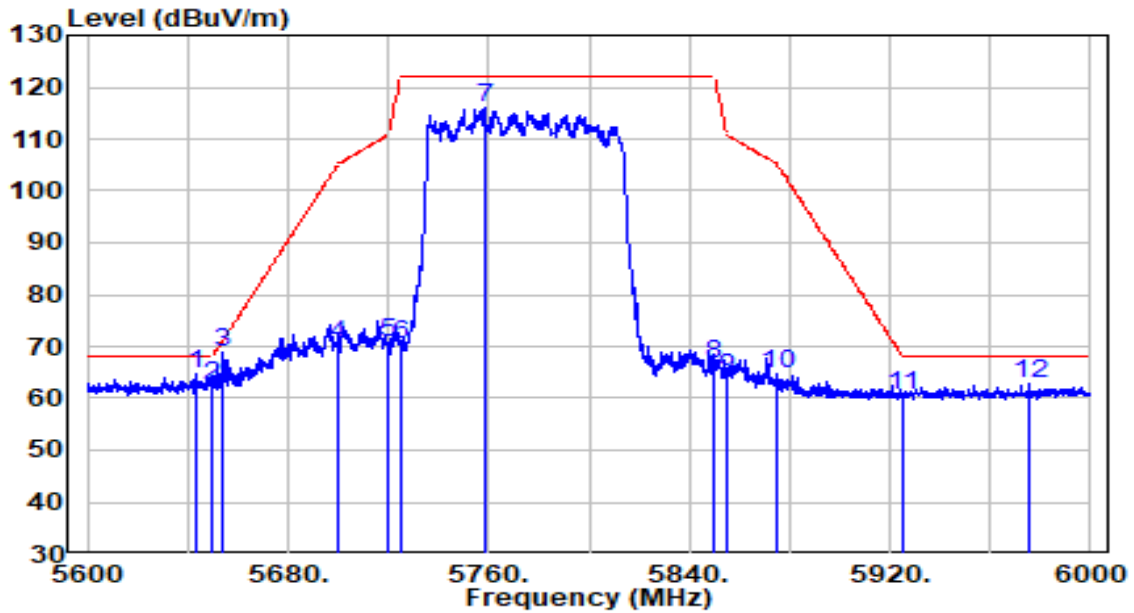

No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5643.800	43.37	21.29	64.67	-3.53	68.20	Peak
2	5650.000	41.31	21.32	62.63	-5.57	68.20	Peak
3	* 5654.000	47.59	21.33	68.92	-2.25	71.17	Peak
4	5700.000	48.80	21.50	70.30	-34.90	105.20	Peak
5	5720.000	49.10	21.57	70.67	-40.13	110.80	Peak
6	5725.000	48.84	21.59	70.43	-51.77	122.20	Peak
7	5758.400	94.17	21.71	115.88	N/A	N/A	Peak
8	5850.000	44.45	22.04	66.49	-55.71	122.20	Peak
9	5855.000	41.76	22.06	63.82	-46.98	110.80	Peak
10	5875.000	42.77	22.14	64.90	-40.30	105.20	Peak
11	5925.000	38.13	22.32	60.45	-7.75	68.20	Peak
12	5976.000	40.32	22.50	62.82	-5.38	68.20	Peak


Note:

1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).

3. Measurement($\text{dB}\mu\text{V}/\text{m}$) = Reading($\text{dB}\mu\text{V}$) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.6°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80+80 at Channel 5210+5290MHz	Test Voltage	By PoE

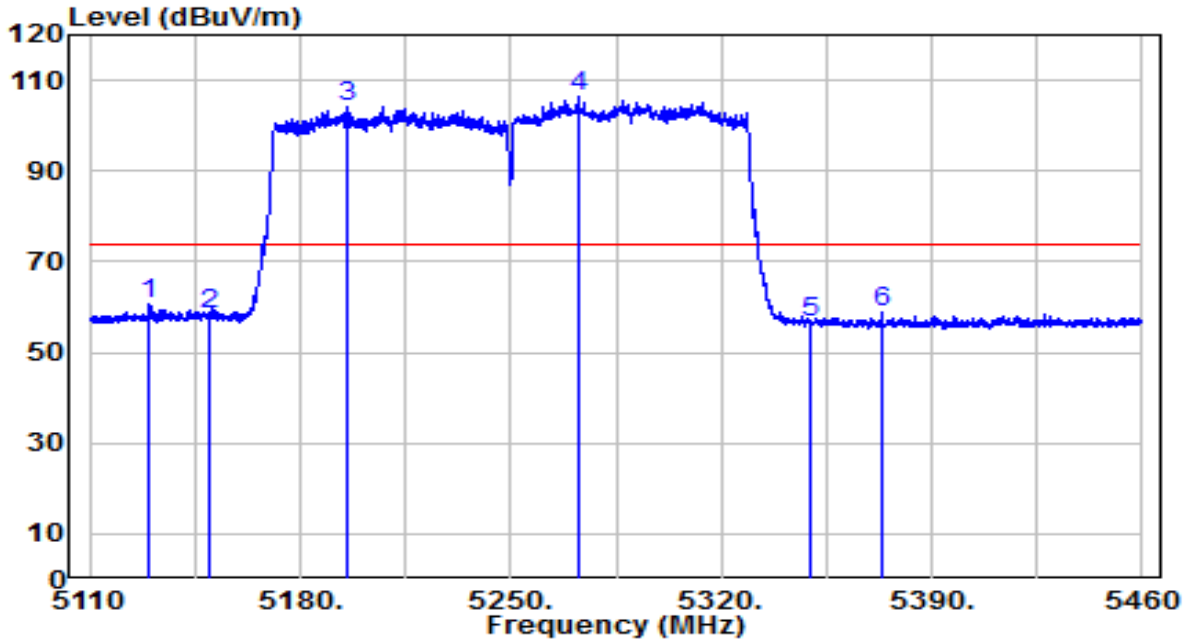


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5129.950	40.35	20.16	60.52	-13.48	74.00	Peak
2	5150.000	38.28	20.20	58.48	-15.52	74.00	Peak
3	5195.225	83.99	20.27	104.26	N/A	N/A	Peak
4	* 5272.575	86.02	20.40	106.41	N/A	N/A	Peak
5	5350.000	35.87	20.52	56.39	-17.61	74.00	Peak
6	5373.725	38.13	20.56	58.69	-15.31	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.6°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80+80 at Channel 5210+5290MHz	Test Voltage	By PoE

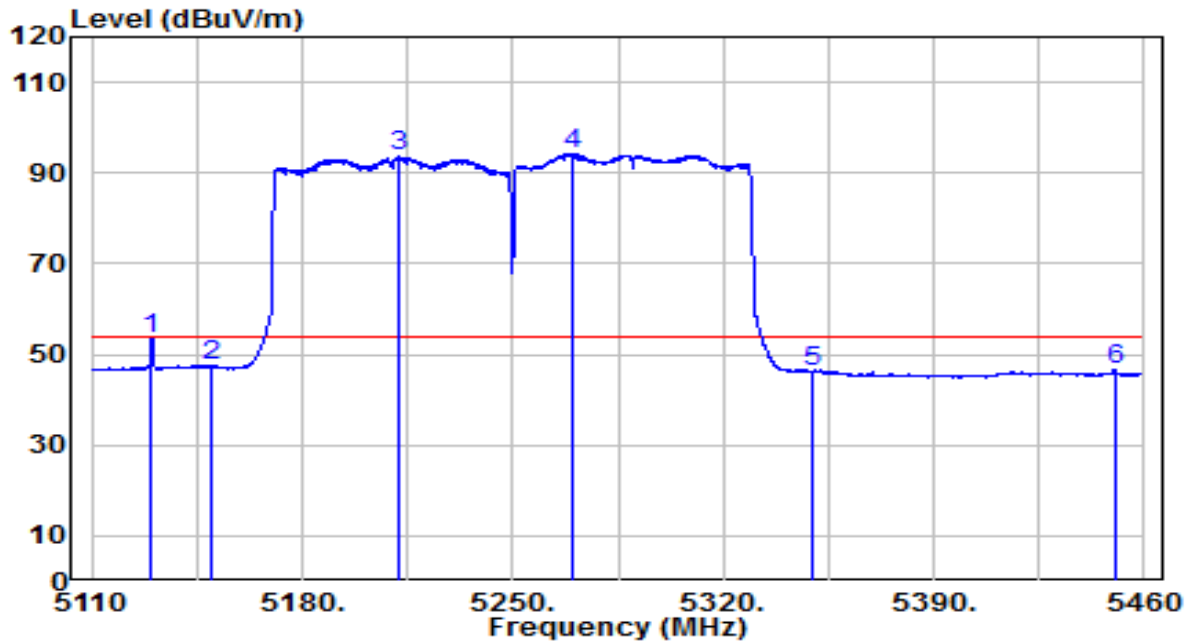


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5129.950	33.34	20.16	53.50	-0.50	54.00	Average
2	5150.000	27.26	20.20	47.46	-6.54	54.00	Average
3	5212.550	73.24	20.30	93.54	N/A	N/A	Average
4	* 5269.600	73.84	20.39	94.24	N/A	N/A	Average
5	5350.000	25.71	20.52	46.23	-7.77	54.00	Average
6	5450.200	25.93	20.69	46.62	-7.38	54.00	Average

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.6°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80+80 at Channel 5210+5290MHz	Test Voltage	By PoE

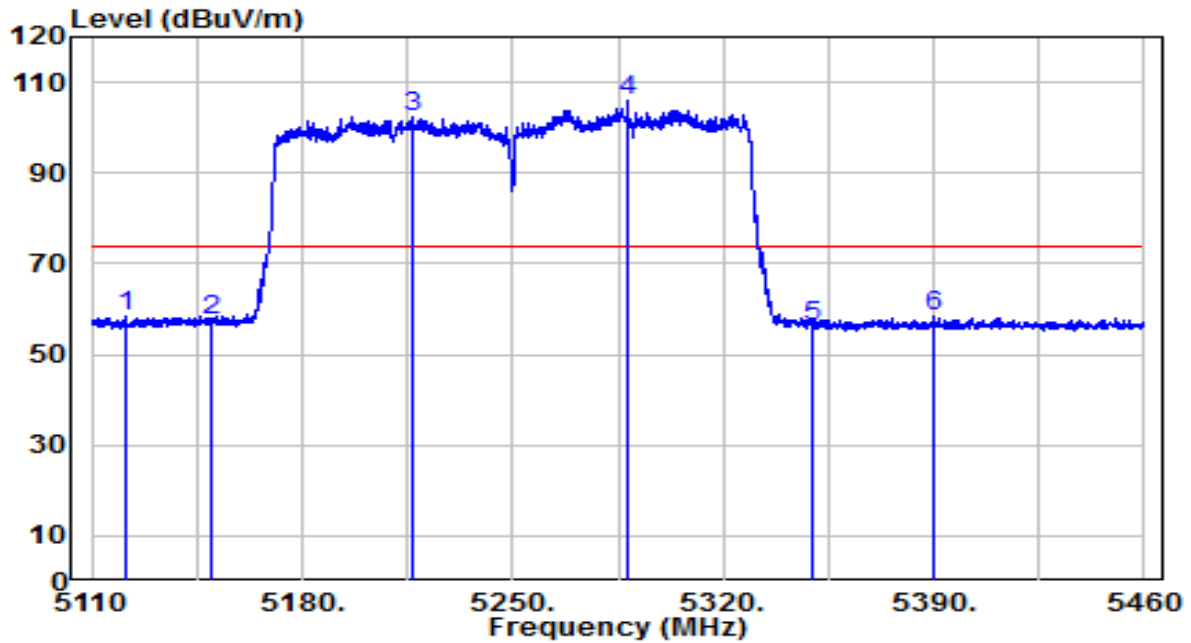


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5121.025	38.43	20.15	58.58	-15.42	74.00	Peak
2	5150.000	37.35	20.20	57.55	-16.45	74.00	Peak
3	5216.925	82.26	20.31	102.56	N/A	N/A	Peak
4	* 5287.975	85.43	20.42	105.85	N/A	N/A	Peak
5	5350.000	35.70	20.52	56.22	-17.78	74.00	Peak
6	5390.000	37.93	20.59	58.52	-15.48	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.6°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80+80 at Channel 5210+5290MHz	Test Voltage	By PoE

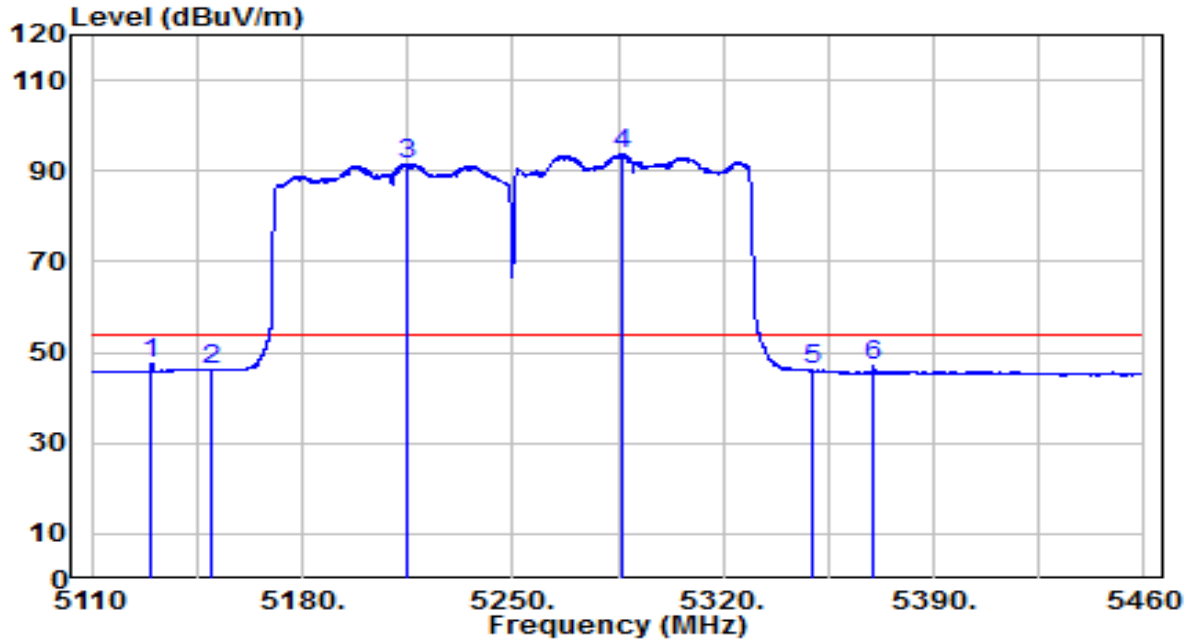


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5129.950	27.58	20.16	47.75	-6.25	54.00	Average
2	5150.000	26.05	20.20	46.24	-7.76	54.00	Average
3	5215.175	71.17	20.30	91.48	N/A	N/A	Average
4	* 5286.750	73.20	20.42	93.62	N/A	N/A	Average
5	5350.000	25.50	20.52	46.02	-7.98	54.00	Average
6	5370.050	26.75	20.56	47.31	-6.69	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz)_2021	Temp. / Humidity	25.6°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80+80 at Channel 5530+5610MHz	Test Voltage	By PoE

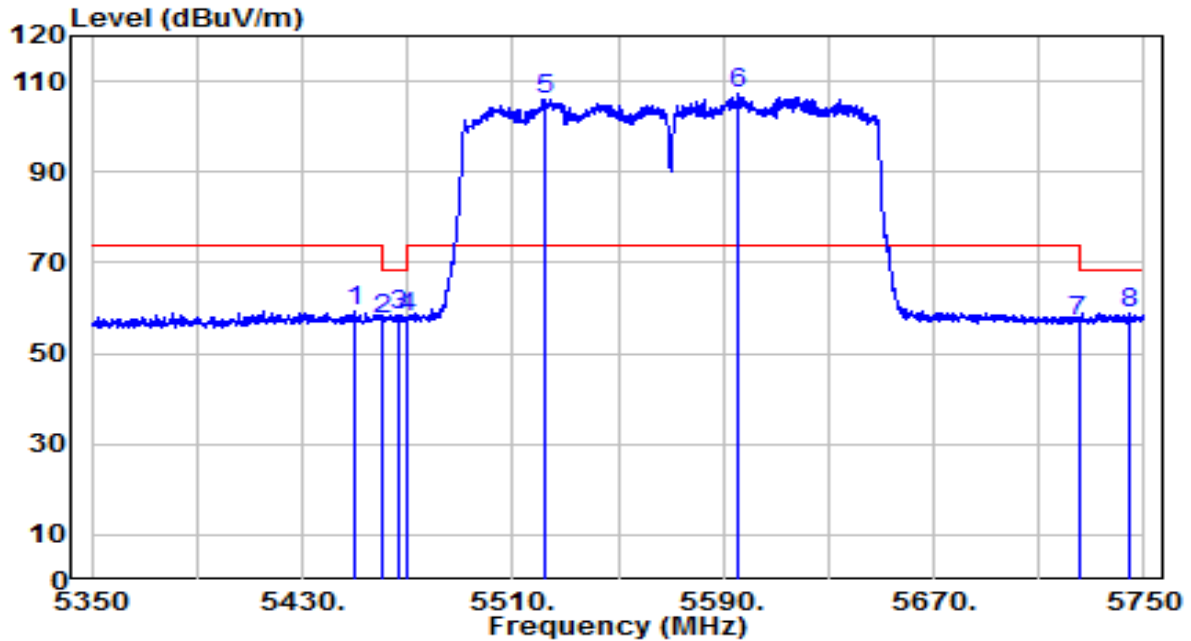


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5450.000	38.78	20.69	59.47	-14.53	74.00	Peak
2	5460.000	36.70	20.70	57.40	-10.80	68.20	Peak
3	5466.400	37.85	20.71	58.57	-9.63	68.20	Peak
4	5470.000	37.12	20.72	57.84	-10.36	68.20	Peak
5	5521.800	85.22	20.85	106.07	N/A	N/A	Peak
6	* 5595.600	86.09	21.12	107.21	N/A	N/A	Peak
7	5725.000	35.54	21.59	57.12	-11.08	68.20	Peak
8	5744.400	37.33	21.66	58.99	-9.21	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.6°C/46%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80+80 at Channel 5530+5610MHz	Test Voltage	By PoE

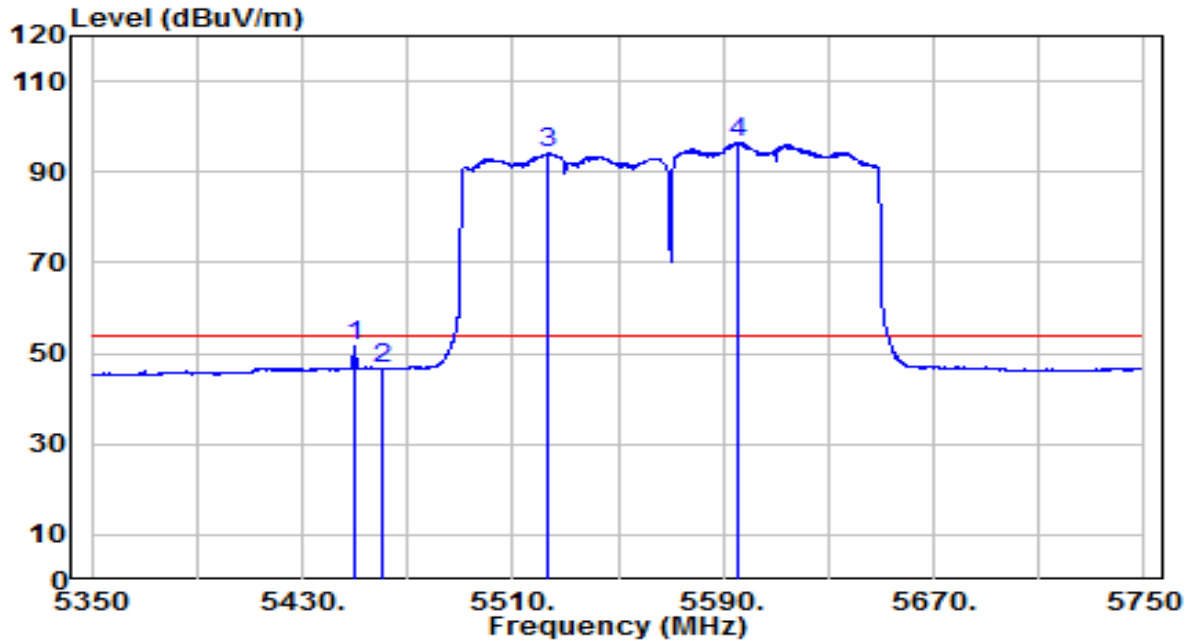


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5450.000	31.11	20.69	51.80	-2.20	54.00	Average
2	5460.000	26.06	20.70	46.76	-7.24	54.00	Average
3	5523.600	73.20	20.86	94.05	N/A	N/A	Average
4	* 5595.400	75.46	21.12	96.58	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.6°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80+80 at Channel 5530+5610MHz	Test Voltage	By PoE

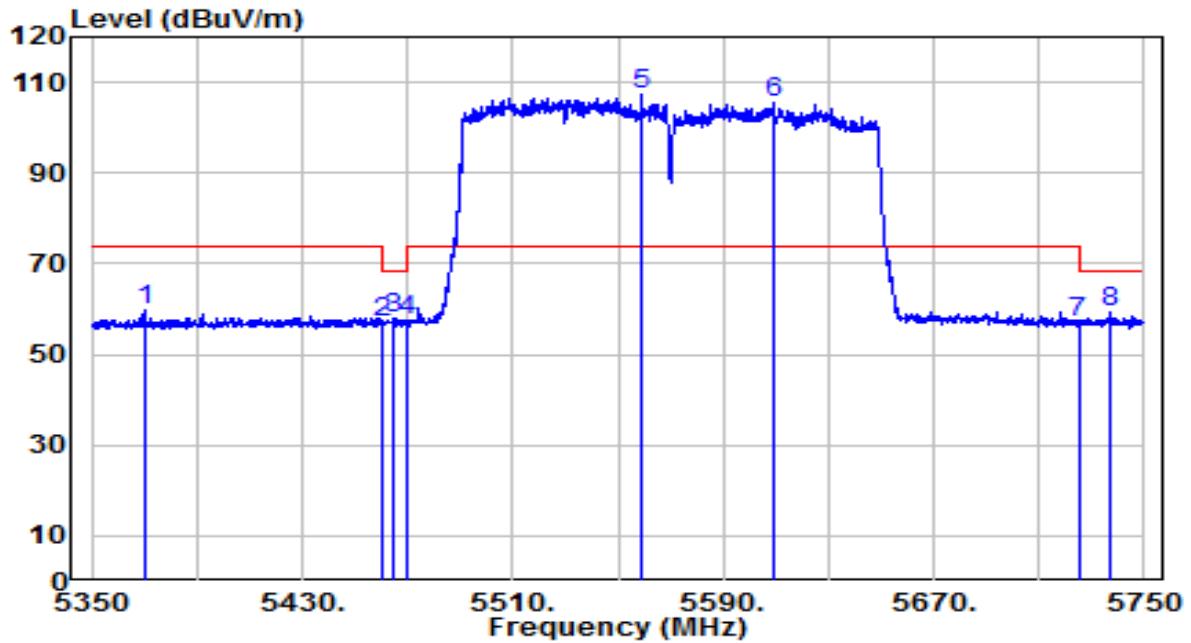


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5370.000	39.29	20.56	59.85	-14.15	74.00	Peak
2	5460.000	36.39	20.70	57.09	-11.11	68.20	Peak
3	5464.400	37.13	20.71	57.85	-10.35	68.20	Peak
4	5470.000	36.57	20.72	57.29	-10.91	68.20	Peak
5	* 5559.000	86.33	20.98	107.31	N/A	N/A	Peak
6	5609.200	84.35	21.17	105.52	N/A	N/A	Peak
7	5725.000	35.25	21.59	56.84	-11.36	68.20	Peak
8	5736.800	37.46	21.63	59.10	-9.10	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-19
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.6°C/46%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE80+80 at Channel 5530+5610MHz	Test Voltage	By PoE

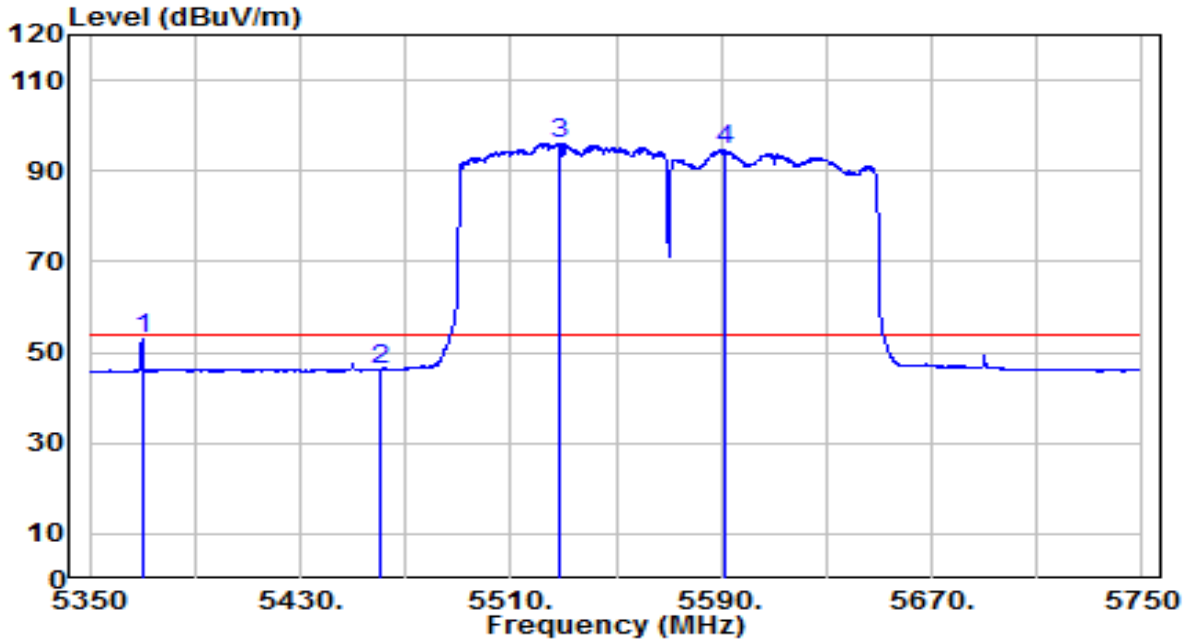


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5370.000	32.58	20.56	53.14	-0.86	54.00	Average
2	5460.000	25.58	20.70	46.28	-7.72	54.00	Average
3	* 5529.000	75.22	20.88	96.09	N/A	N/A	Average
4	5591.400	73.45	21.10	94.56	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

APEX0587

EUT	ACCESS POINT	Date of Test	2021-09-15
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.6°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	By PoE

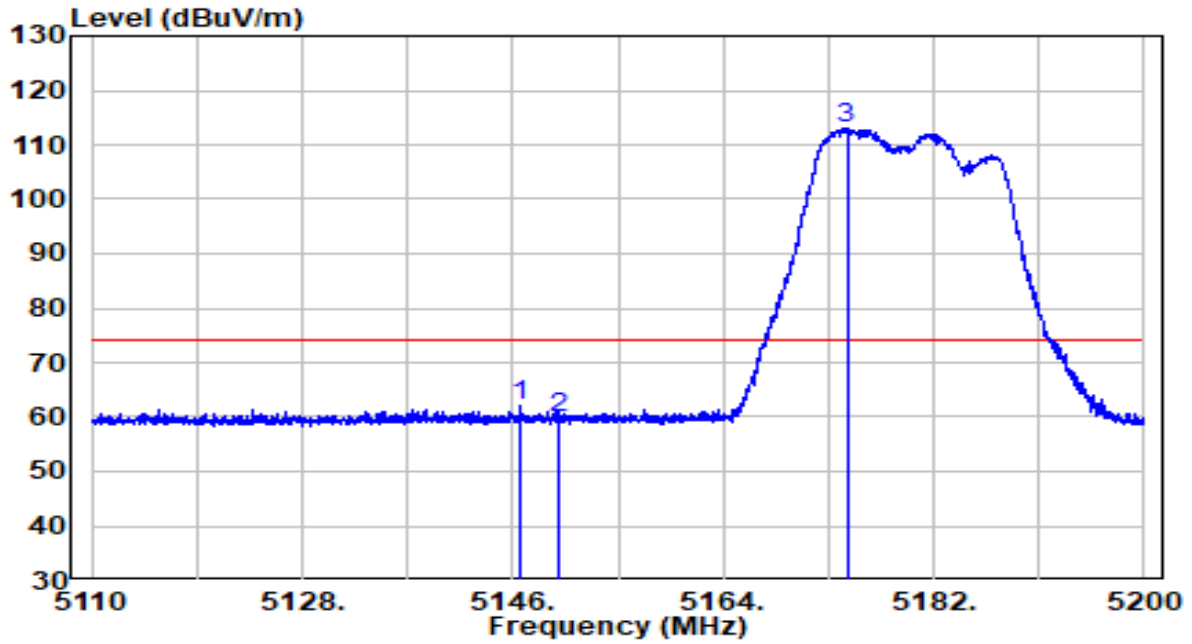


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5146.720	41.70	20.19	61.89	-12.11	74.00	Peak
2	5150.000	39.66	20.20	59.85	-14.15	74.00	Peak
3	* 5174.575	92.71	20.24	112.94	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-15
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.6°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	By PoE

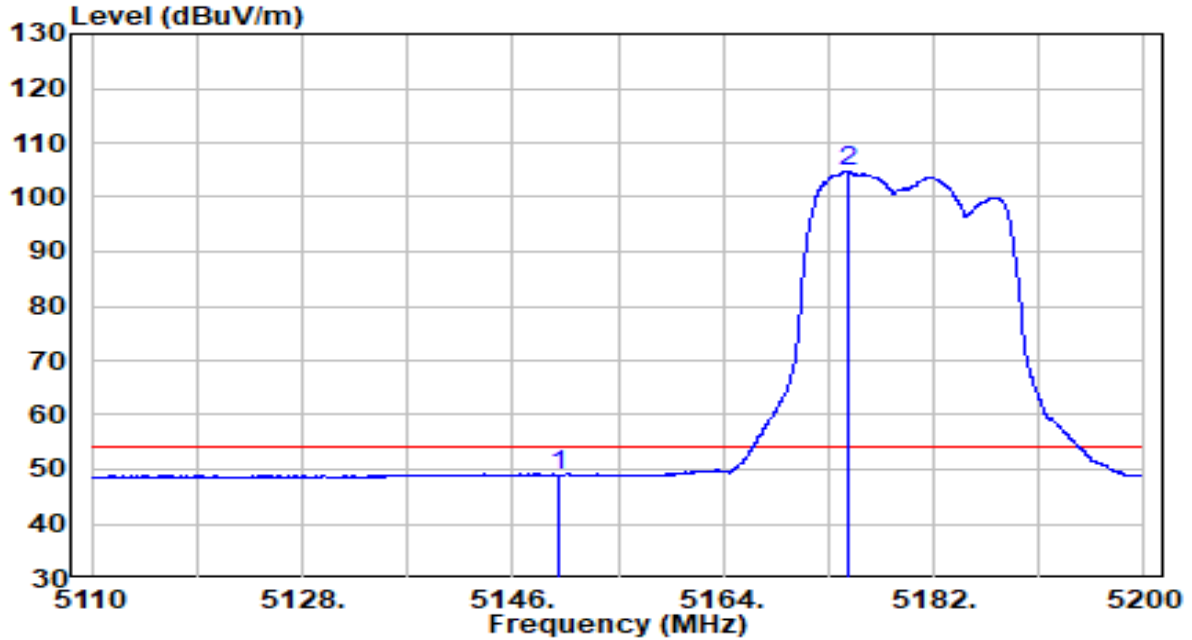


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	5150.000	28.80	20.20	49.00	-5.00	54.00	Average
2	* 5174.755	84.56	20.24	104.79	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-15
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.6°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	By PoE

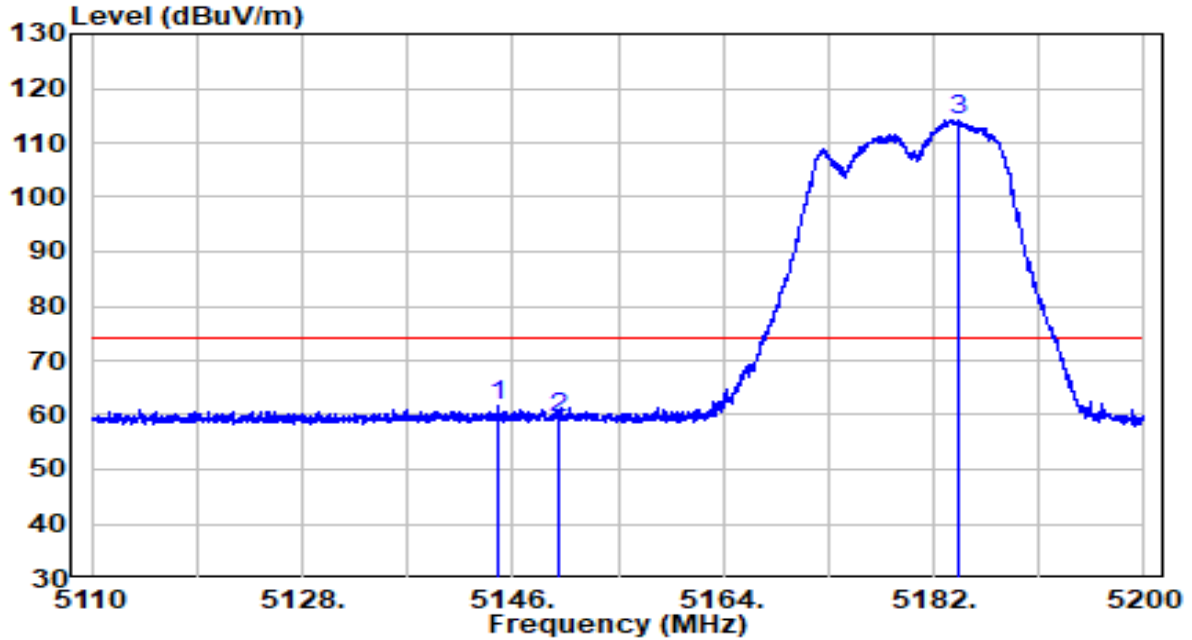


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	5144.695	41.36	20.19	61.54	-12.46	74.00	Peak
2	5150.000	39.16	20.20	59.36	-14.64	74.00	Peak
3	* 5184.025	93.99	20.25	114.24	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-15
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.6°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	By PoE

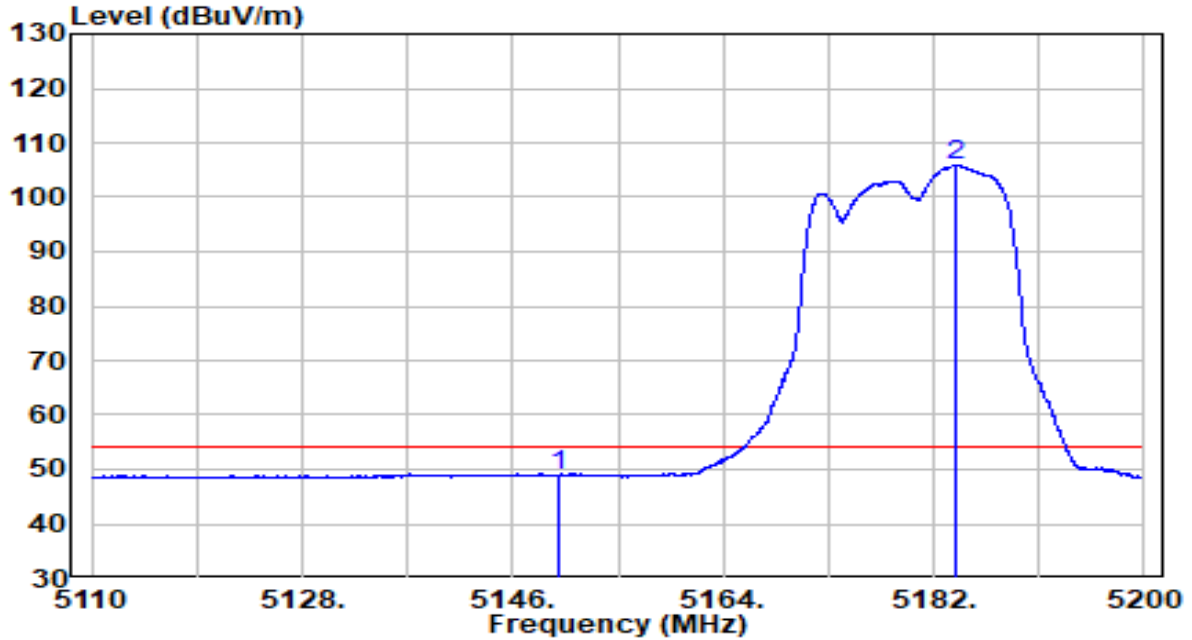


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	5150.000	28.79	20.20	48.98	-5.02	54.00	Average
2	* 5183.800	85.54	20.25	105.79	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-15
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.6°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5320MHz	Test Voltage	By PoE

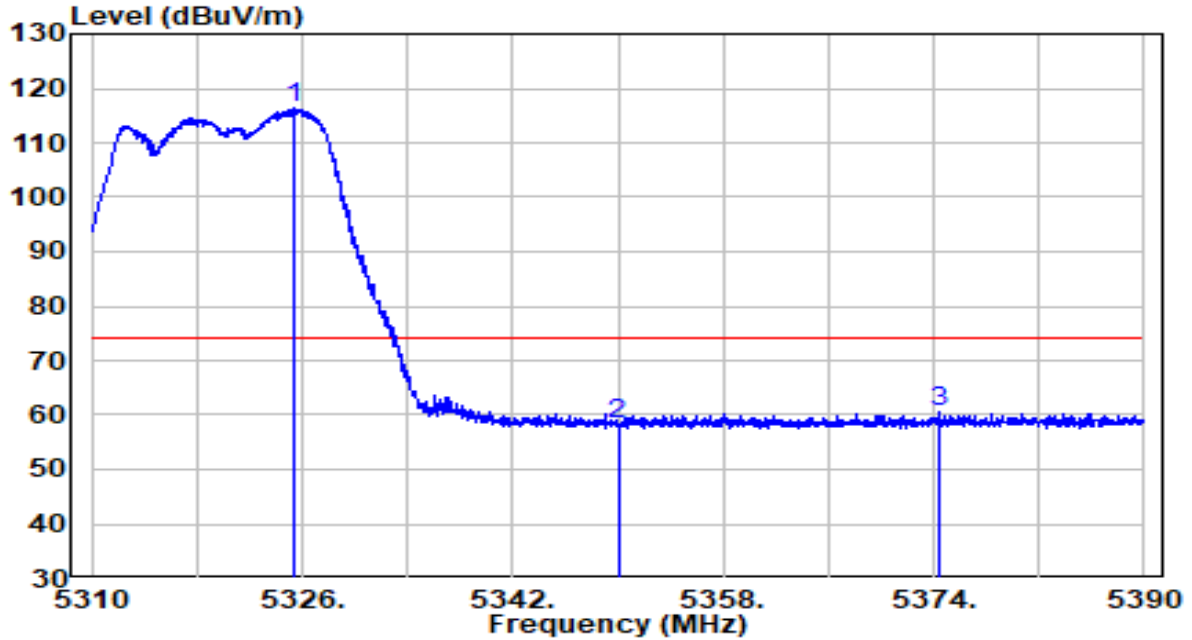


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5325.280	95.93	20.48	116.41	N/A	N/A	Peak
2	5350.000	37.67	20.52	58.19	-15.81	74.00	Peak
3	5374.480	40.10	20.56	60.67	-13.33	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-15
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.6°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5320MHz	Test Voltage	By PoE

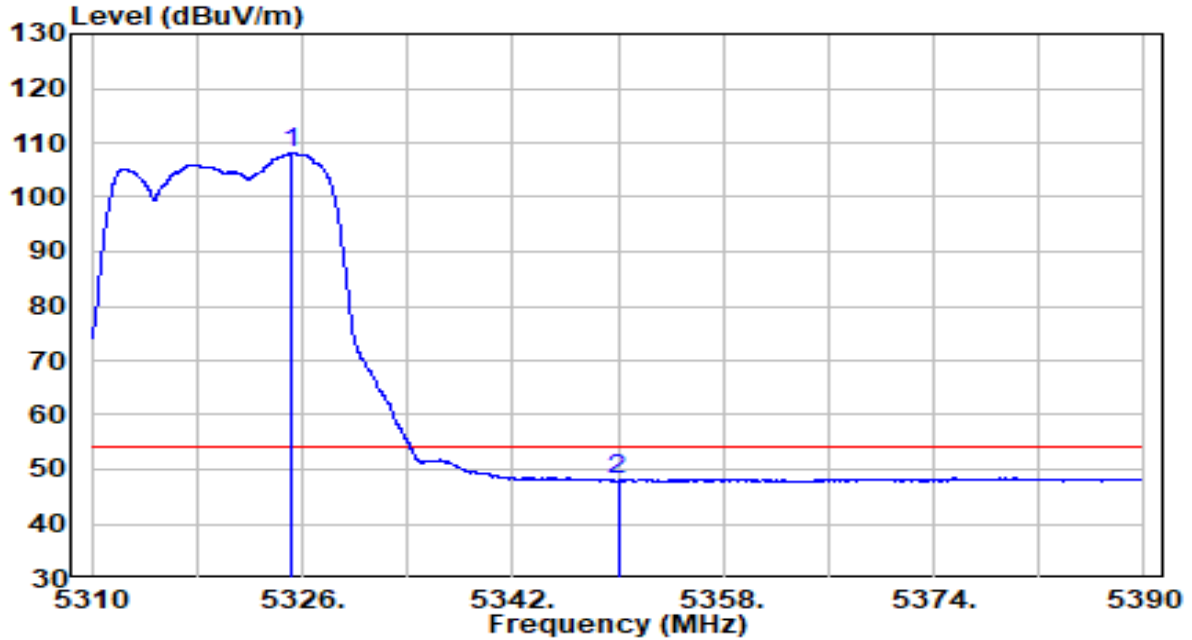


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5325.240	87.61	20.48	108.09	N/A	N/A	Average
2	5350.000	27.42	20.52	47.94	-6.06	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-15
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.6°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5320MHz	Test Voltage	By PoE

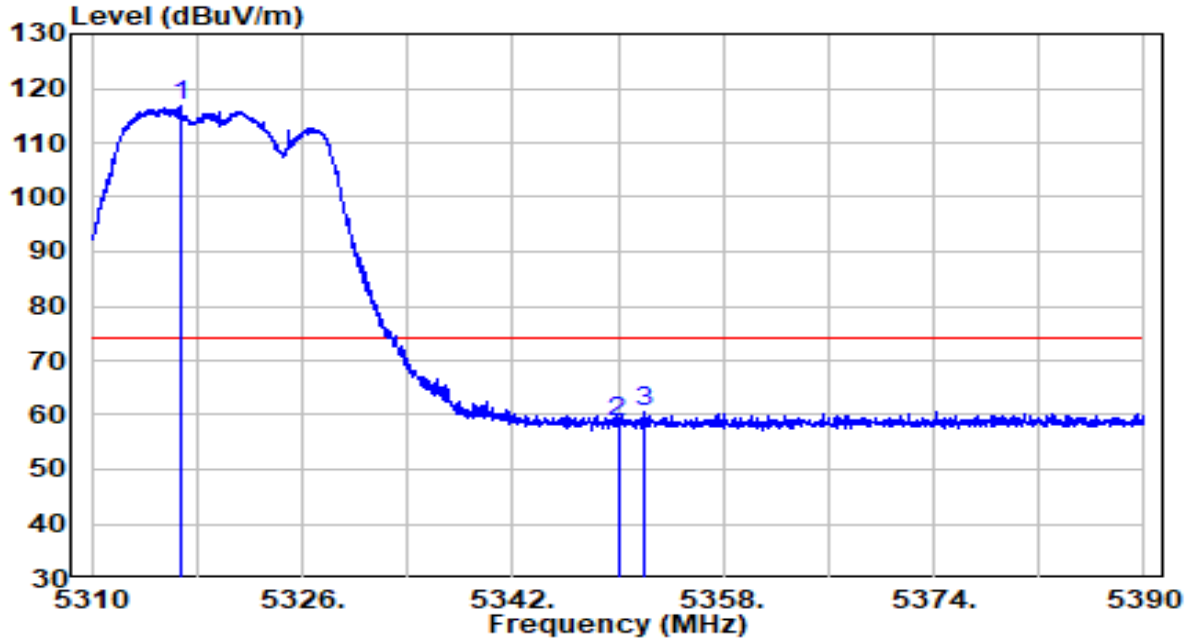


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	* 5316.720	96.20	20.47	116.67	N/A	N/A	Peak
2	5350.000	38.19	20.52	58.71	-15.29	74.00	Peak
3	5351.920	40.06	20.53	60.59	-13.41	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-15
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.6°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5320MHz	Test Voltage	By PoE

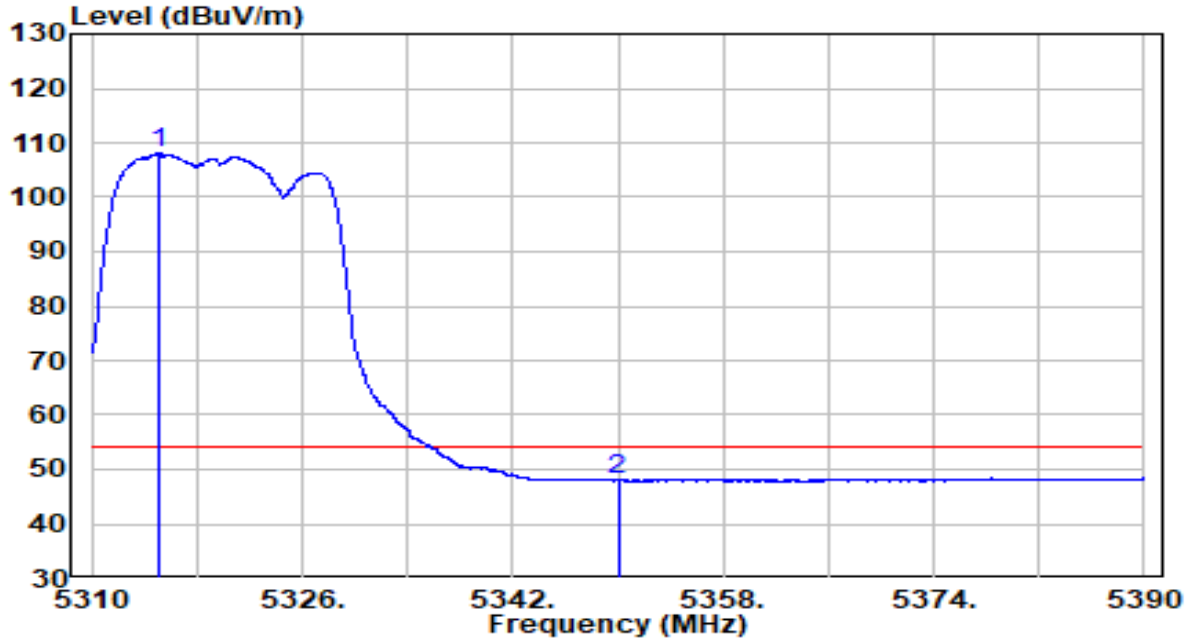


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	*	87.59	20.47	108.05	N/A	N/A	Average
2	5350.000	27.55	20.52	48.07	-5.93	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-15
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.6°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5500MHz	Test Voltage	By PoE

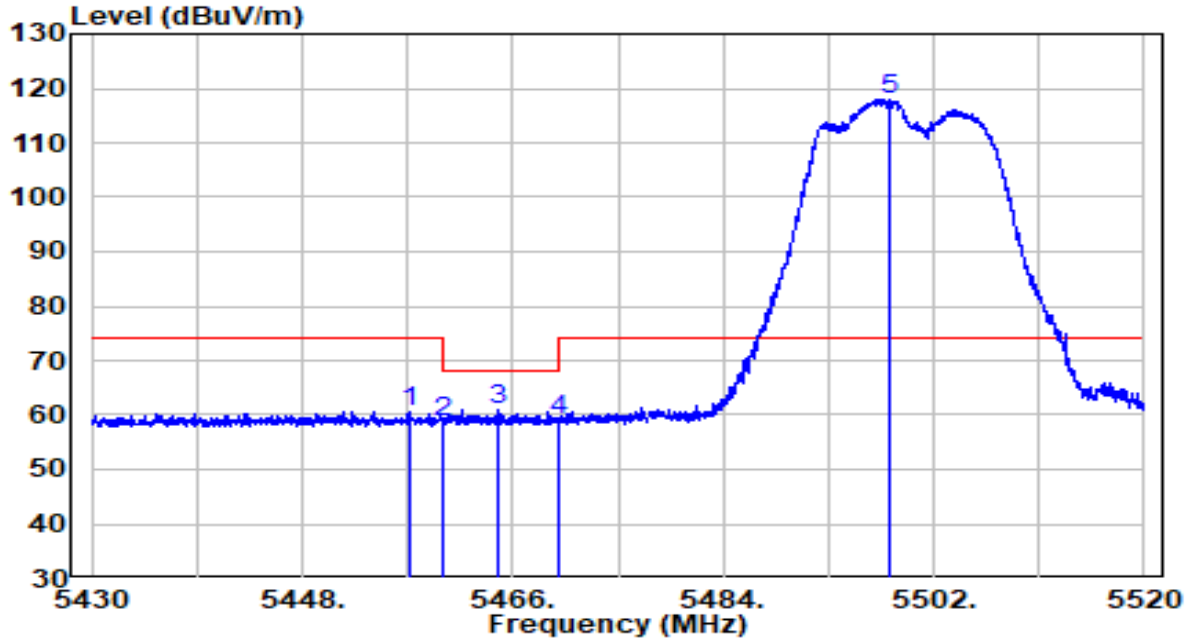


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5457.225	39.86	20.70	60.56	-13.44	74.00	Peak
2	5460.000	37.86	20.70	58.57	-9.63	68.20	Peak
3	5464.650	40.39	20.71	61.10	-7.10	68.20	Peak
4	5470.000	38.22	20.72	58.94	-9.26	68.20	Peak
5	* 5498.265	97.31	20.77	118.08	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-15
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.6°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5500MHz	Test Voltage	By PoE

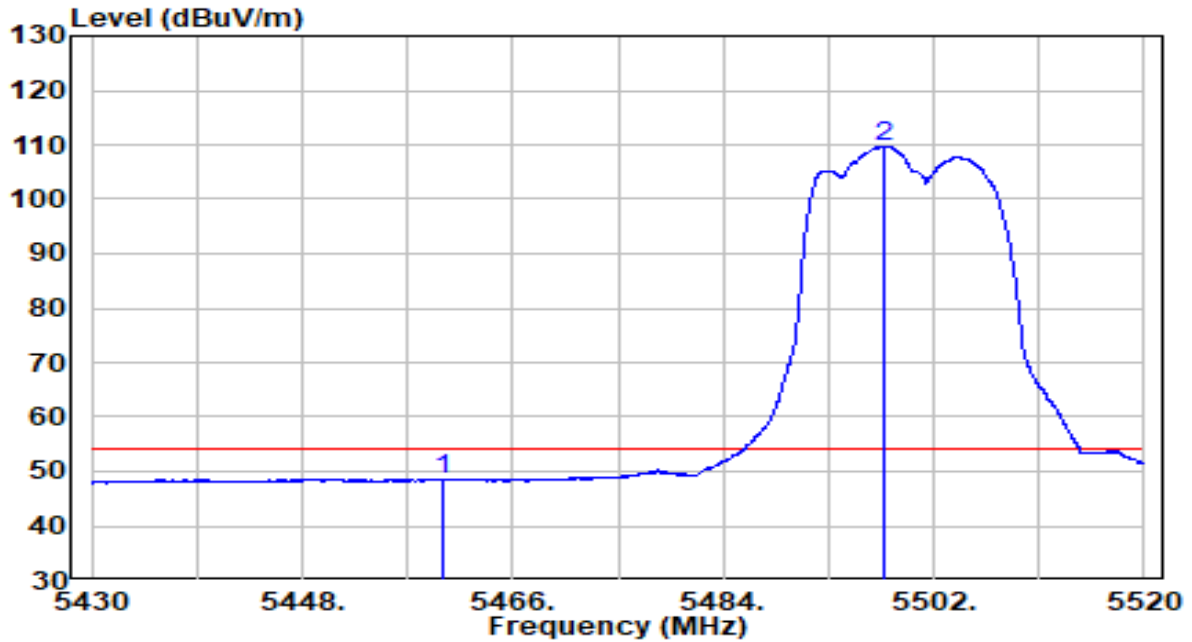


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	5460.000	27.68	20.70	48.38	-5.62	54.00	Average
2	* 5497.815	89.04	20.77	109.80	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-15
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.6°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5500MHz	Test Voltage	By PoE

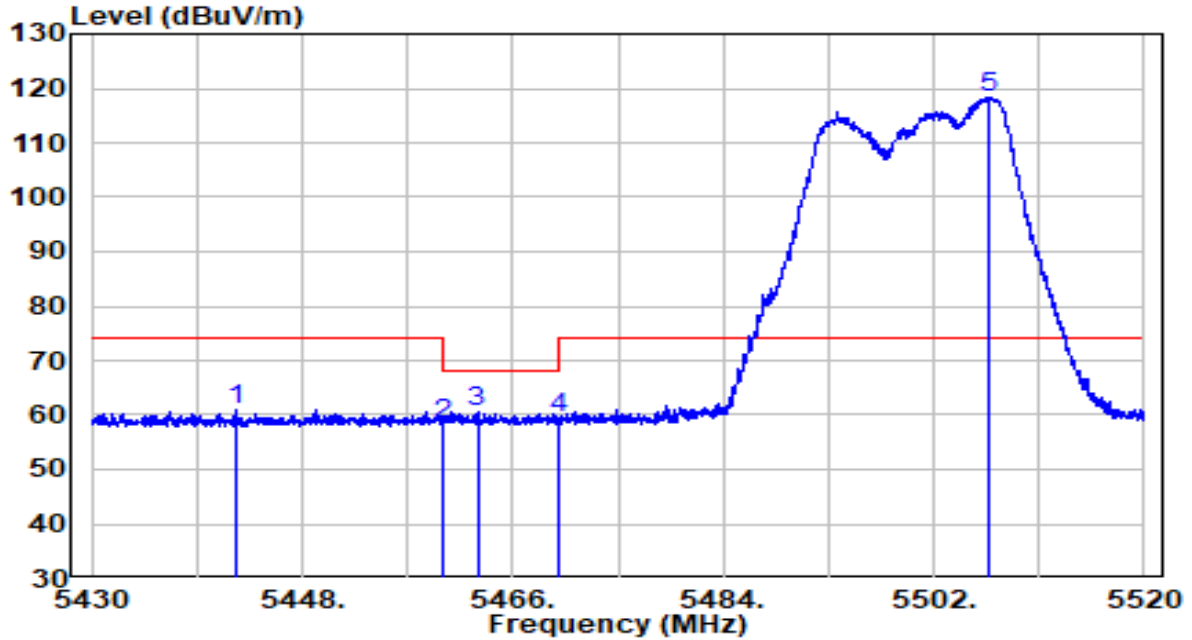


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	5442.240	40.24	20.68	60.91	-13.09	74.00	Peak
2	5460.000	37.45	20.70	58.16	-10.04	68.20	Peak
3	5462.985	39.94	20.71	60.65	-7.55	68.20	Peak
4	5470.000	38.66	20.72	59.38	-8.82	68.20	Peak
5	* 5506.680	97.68	20.79	118.47	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-15
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.6°C/46.2%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5500MHz	Test Voltage	By PoE

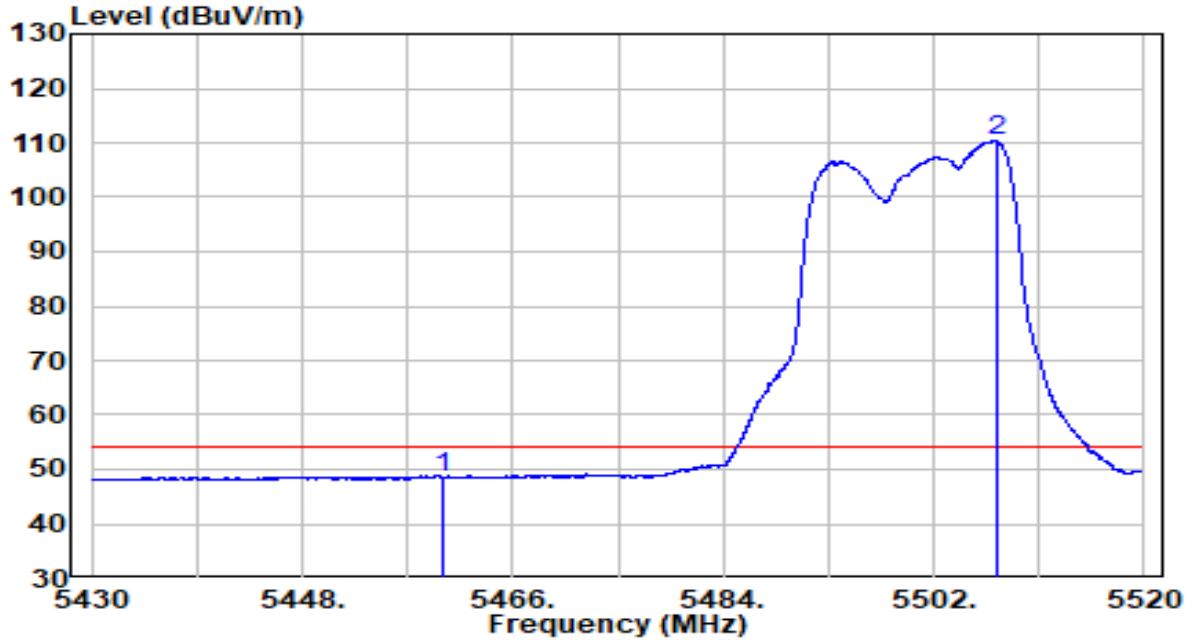


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	5460.000	27.80	20.70	48.51	-5.49	54.00	Average
2	* 5507.355	89.63	20.80	110.43	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-09-15
Factor	BBHA 9120D (1GHz~18GHz) _2021	Temp. / Humidity	25.6°C/46.2%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5700MHz	Test Voltage	By PoE

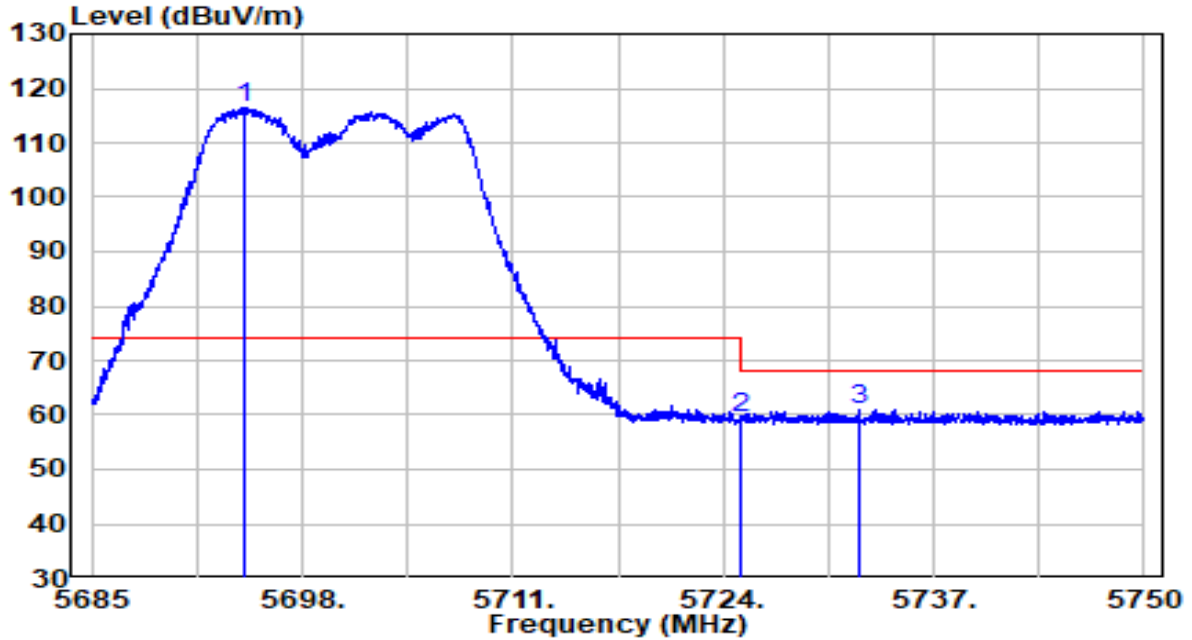

No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	* 5694.393	94.99	21.48	116.47	N/A	N/A	Peak
2	5725.000	37.83	21.59	59.41	-8.79	68.20	Peak
3	5732.385	39.18	21.62	60.79	-7.41	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).