



## 802.11b Out-of-Band Emissions – Ant 1

### Channel 11 (2462MHz)


#### 100kHz PSD Reference Level

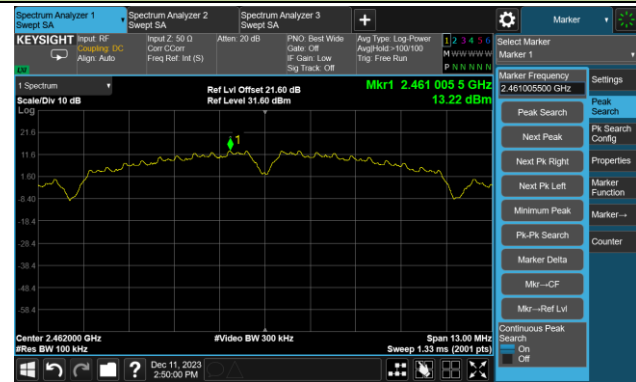

#### High Band Edge

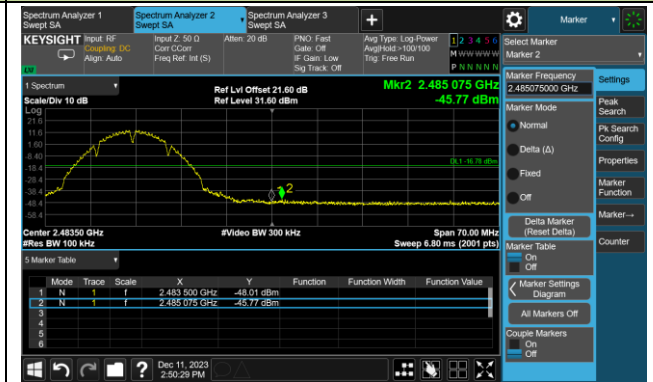


#### Spurious Emission

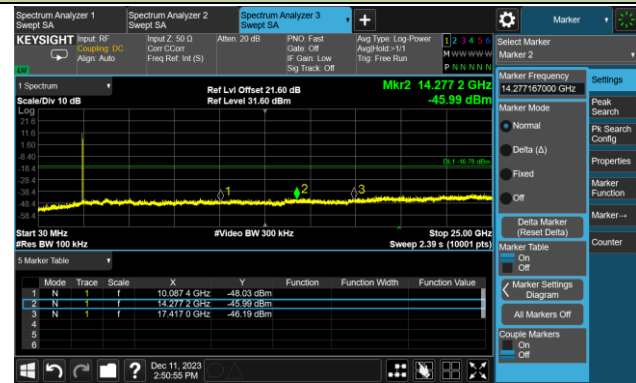


## 802.11g Out-of-Band Emissions – Ant 1

### Channel 11 (2462MHz)


#### 100kHz PSD Reference Level

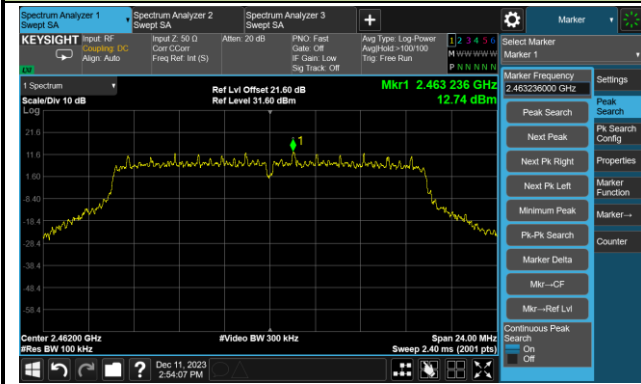

#### High Band Edge

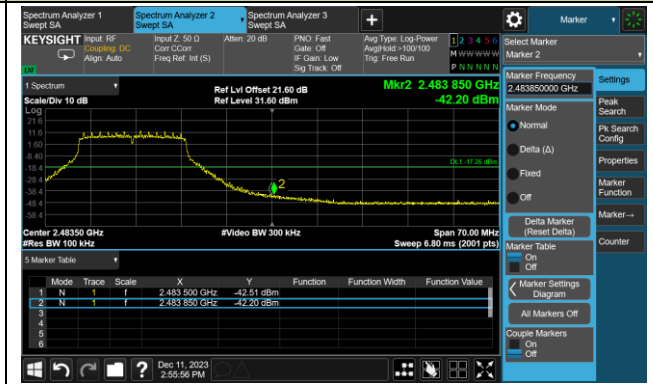


#### Spurious Emission

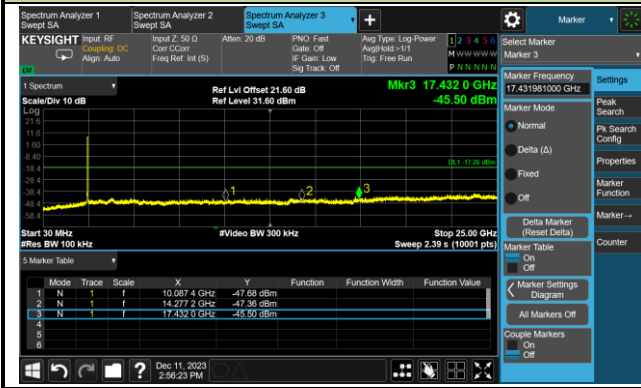


## 802.11n-HT20 Out-of-Band Emissions – Ant 1

### Channel 11 (2462MHz)


#### 100kHz PSD Reference Level

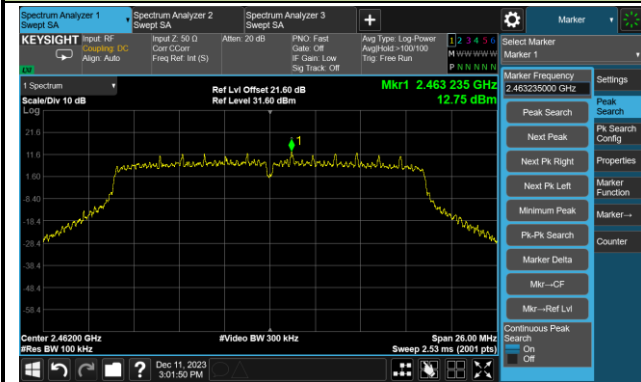

#### High Band Edge

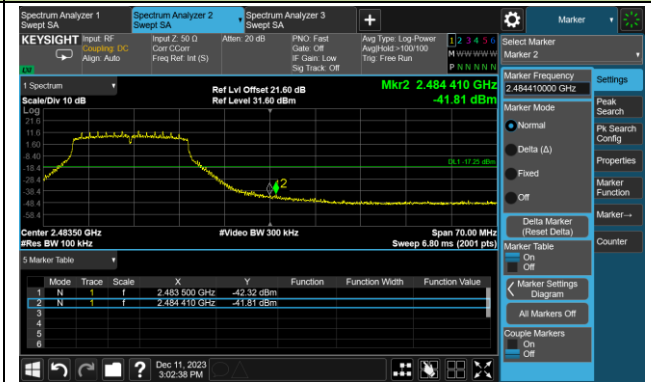


#### Spurious Emission

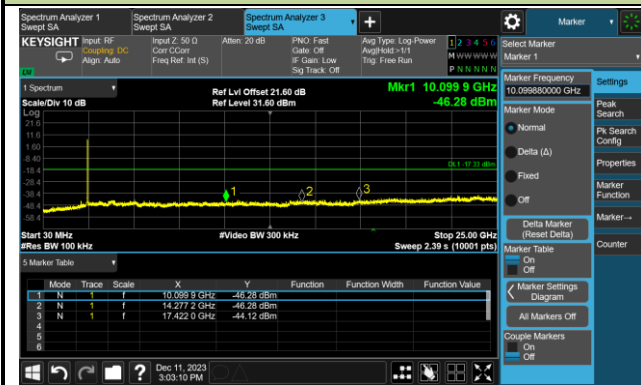


## 802.11ax-HE20 Out-of-Band Emissions – Ant 1

### Channel 11 (2462MHz)


#### 100kHz PSD Reference Level

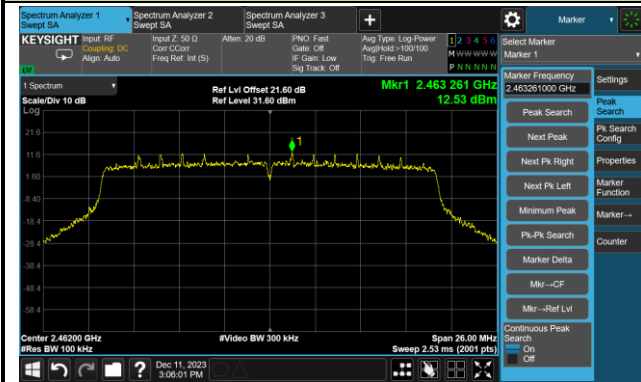

#### High Band Edge

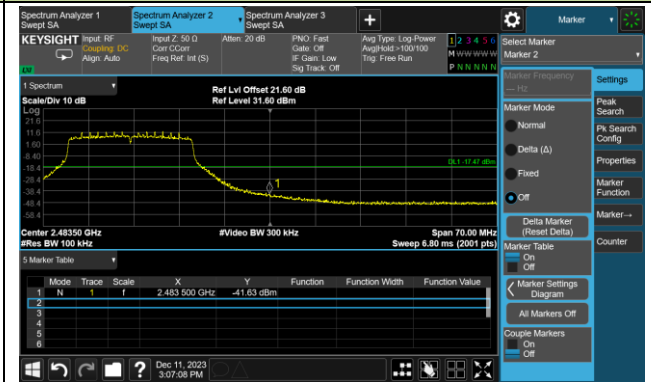

#### Spurious Emission

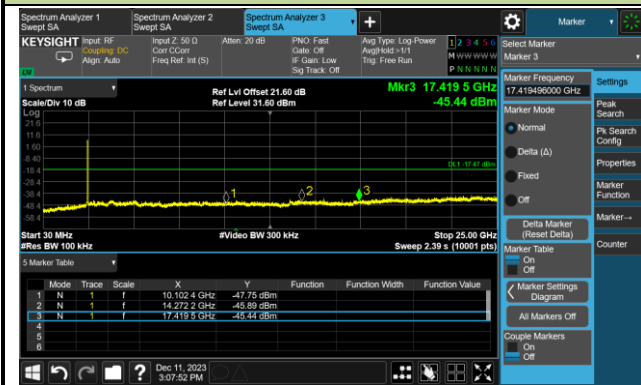

## 6. Radiated Spurious Emission Measurement Test Result

### Filter 1#

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-10-07	Test Mode	802.11b
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4825.0	46.0	3.1	49.1	74.0	-24.9	Peak	Horizontal
	7434.5	36.9	8.5	45.4	74.0	-28.6	Peak	Horizontal
	10953.5	35.6	14.1	49.7	74.0	-24.3	Peak	Horizontal
	4825.0	45.5	3.1	48.6	74.0	-25.4	Peak	Vertical
	7477.0	37.1	8.6	45.7	74.0	-28.3	Peak	Vertical
	11038.5	35.2	14.1	49.3	74.0	-24.7	Peak	Vertical
06	4876.0	45.5	3.1	48.6	74.0	-25.4	Peak	Horizontal
	7375.0	37.0	8.6	45.6	74.0	-28.4	Peak	Horizontal
	10834.5	35.5	14.0	49.5	74.0	-24.5	Peak	Horizontal
	4876.0	42.1	3.1	45.2	74.0	-28.8	Peak	Vertical
	7434.5	38.2	8.5	46.7	74.0	-27.3	Peak	Vertical
	11047.0	35.9	14.2	50.1	74.0	-23.9	Peak	Vertical
11	4927.0	39.0	3.2	42.2	74.0	-31.8	Peak	Horizontal
	7451.5	36.8	8.6	45.4	74.0	-28.6	Peak	Horizontal
	11021.5	35.6	14.1	49.7	74.0	-24.3	Peak	Horizontal
	7672.5	38.0	8.0	46.0	74.0	-28.0	Peak	Vertical
	8378.0	36.2	8.9	45.1	74.0	-28.9	Peak	Vertical
	11038.5	35.0	14.1	49.1	74.0	-24.9	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-10-07	Test Mode	802.11g
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4816.5	40.9	3.0	43.9	74.0	-30.1	Peak	Horizontal
	7434.5	36.7	8.5	45.2	74.0	-28.8	Peak	Horizontal
	11769.5	36.4	12.5	48.9	74.0	-25.1	Peak	Horizontal
	7358.0	35.5	8.5	44.0	74.0	-30.0	Peak	Vertical
	8293.0	36.6	8.8	45.4	74.0	-28.6	Peak	Vertical
	11072.5	35.0	14.0	49.0	74.0	-25.0	Peak	Vertical
06	4876.0	42.3	3.1	45.4	74.0	-28.6	Peak	Horizontal
	8216.5	36.2	8.8	45.0	74.0	-29.0	Peak	Horizontal
	10928.0	35.5	14.1	49.6	74.0	-24.4	Peak	Horizontal
	3924.0	37.7	0.7	38.4	74.0	-35.6	Peak	Vertical
	4876.0	37.7	3.1	40.8	74.0	-33.2	Peak	Vertical
	11055.5	35.2	14.1	49.3	74.0	-24.7	Peak	Vertical
11	7451.5	36.9	8.6	45.5	74.0	-28.5	Peak	Horizontal
	8293.0	35.6	8.8	44.4	74.0	-29.6	Peak	Horizontal
	11064.0	35.5	13.9	49.4	74.0	-24.6	Peak	Horizontal
	7375.0	37.4	8.6	46.0	74.0	-28.0	Peak	Vertical
	8488.5	36.4	9.1	45.5	74.0	-28.5	Peak	Vertical
	11956.5	36.6	12.3	48.9	74.0	-25.1	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-10-07	Test Mode	802.11n-HT20
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4825.0	45.0	3.1	48.1	74.0	-25.9	Peak	Horizontal
	7426.0	36.4	8.5	44.9	74.0	-29.1	Peak	Horizontal
	11004.5	35.0	14.3	49.3	74.0	-24.7	Peak	Horizontal
	4825.0	45.0	3.1	48.1	74.0	-25.9	Peak	Vertical
	7426.0	36.4	8.5	44.9	74.0	-29.1	Peak	Vertical
	11004.5	35.0	14.3	49.3	74.0	-24.7	Peak	Vertical
06	4876.0	44.8	3.1	47.9	74.0	-26.1	Peak	Horizontal
	8497.0	36.3	9.1	45.4	74.0	-28.6	Peak	Horizontal
	11098.0	36.0	13.9	49.9	74.0	-24.1	Peak	Horizontal
	4867.5	42.6	3.0	45.6	74.0	-28.4	Peak	Vertical
	7383.5	36.3	8.6	44.9	74.0	-29.1	Peak	Vertical
	11055.5	35.3	14.1	49.4	74.0	-24.6	Peak	Vertical
11	4927.0	41.0	3.2	44.2	74.0	-29.8	Peak	Horizontal
	7655.5	37.4	8.2	45.6	74.0	-28.4	Peak	Horizontal
	10996.0	34.7	14.4	49.1	74.0	-24.9	Peak	Horizontal
	4077.0	35.0	0.9	35.9	74.0	-38.1	Peak	Vertical
	4935.5	37.9	3.3	41.2	74.0	-32.8	Peak	Vertical
	11242.5	35.0	13.4	48.4	74.0	-25.6	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)  
 Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-10-07	Test Mode	802.11n-HT40
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	7392.0	36.1	8.5	44.6	74.0	-29.4	Peak	Horizontal
	8488.5	36.2	9.1	45.3	74.0	-28.7	Peak	Horizontal
	11123.5	35.5	13.5	49.0	74.0	-25.0	Peak	Horizontal
	7545.0	36.5	8.6	45.1	74.0	-28.9	Peak	Vertical
	8259.0	36.1	8.7	44.8	74.0	-29.2	Peak	Vertical
	11098.0	35.0	13.9	48.9	74.0	-25.1	Peak	Vertical
06	7460.0	36.2	8.6	44.8	74.0	-29.2	Peak	Horizontal
	8259.0	35.6	8.7	44.3	74.0	-29.7	Peak	Horizontal
	11132.0	36.2	13.5	49.7	74.0	-24.3	Peak	Horizontal
	7672.5	37.2	8.0	45.2	74.0	-28.8	Peak	Vertical
	8480.0	36.0	9.2	45.2	74.0	-28.8	Peak	Vertical
	11064.0	35.2	13.9	49.1	74.0	-24.9	Peak	Vertical
09	7443.0	36.4	8.6	45.0	74.0	-29.0	Peak	Horizontal
	8301.5	36.0	8.7	44.7	74.0	-29.3	Peak	Horizontal
	10928.0	34.5	14.1	48.6	74.0	-25.4	Peak	Horizontal
	7434.5	36.1	8.5	44.6	74.0	-29.4	Peak	Vertical
	8327.0	36.1	8.7	44.8	74.0	-29.2	Peak	Vertical
	11038.5	34.4	14.1	48.5	74.0	-25.5	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)





Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-10-07	Test Mode	802.11ax-HE20
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	7366.5	36.6	8.6	45.2	74.0	-28.8	Peak	Horizontal
	8463.0	36.1	9.3	45.4	74.0	-28.6	Peak	Horizontal
	11047.0	34.7	14.2	48.9	74.0	-25.1	Peak	Horizontal
	4825.0	40.2	3.1	43.3	74.0	-30.7	Peak	Vertical
	7596.0	36.7	8.3	45.0	74.0	-29.0	Peak	Vertical
	12058.5	36.4	12.5	48.9	74.0	-25.1	Peak	Vertical
06	7366.5	36.1	8.6	44.7	74.0	-29.3	Peak	Horizontal
	8233.5	36.4	8.8	45.2	74.0	-28.8	Peak	Horizontal
	10962.0	34.6	14.1	48.7	74.0	-25.3	Peak	Horizontal
	4867.5	40.5	3.0	43.5	74.0	-30.5	Peak	Vertical
	7434.5	36.0	8.5	44.5	74.0	-29.5	Peak	Vertical
	10996.0	34.5	14.4	48.9	74.0	-25.1	Peak	Vertical
11	7426.0	37.0	8.5	45.5	74.0	-28.5	Peak	Horizontal
	8148.5	35.6	9.3	44.9	74.0	-29.1	Peak	Horizontal
	12024.5	36.2	12.5	48.7	74.0	-25.3	Peak	Horizontal
	7647.0	36.3	8.2	44.5	74.0	-29.5	Peak	Vertical
	8378.0	36.7	8.9	45.6	74.0	-28.4	Peak	Vertical
	12058.5	36.4	12.5	48.9	74.0	-25.1	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-10-07	Test Mode	802.11ax-HE40
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	7443.0	36.4	8.6	45.0	74.0	-29.0	Peak	Horizontal
	8267.5	36.0	8.6	44.6	74.0	-29.4	Peak	Horizontal
	11055.5	34.2	14.1	48.3	74.0	-25.7	Peak	Horizontal
	7689.5	36.7	8.1	44.8	74.0	-29.2	Peak	Vertical
	8497.0	36.4	9.1	45.5	74.0	-28.5	Peak	Vertical
	11157.5	34.5	13.8	48.3	74.0	-25.7	Peak	Vertical
06	7562.0	36.4	8.4	44.8	74.0	-29.2	Peak	Horizontal
	8284.5	36.5	8.6	45.1	74.0	-28.9	Peak	Horizontal
	11055.5	34.5	14.1	48.6	74.0	-25.4	Peak	Horizontal
	7341.0	36.2	8.2	44.4	74.0	-29.6	Peak	Vertical
	8131.5	34.5	9.1	43.6	74.0	-30.4	Peak	Vertical
	11157.5	35.1	13.8	48.9	74.0	-25.1	Peak	Vertical
09	7562.0	36.8	8.4	45.2	74.0	-28.8	Peak	Horizontal
	8148.5	35.3	9.3	44.6	74.0	-29.4	Peak	Horizontal
	11157.5	34.6	13.8	48.4	74.0	-25.6	Peak	Horizontal
	7358.0	36.6	8.5	45.1	74.0	-28.9	Peak	Vertical
	8157.0	35.3	9.3	44.6	74.0	-29.4	Peak	Vertical
	11081.0	34.9	14.0	48.9	74.0	-25.1	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)  
 Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

**Filter 2#**

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-10-07	Test Mode	802.11b
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4825.0	46.0	3.1	49.1	74.0	-24.9	Peak	Horizontal
	7434.5	36.9	8.5	45.4	74.0	-28.6	Peak	Horizontal
	10953.5	35.6	14.1	49.7	74.0	-24.3	Peak	Horizontal
	4825.0	45.5	3.1	48.6	74.0	-25.4	Peak	Vertical
	7477.0	37.1	8.6	45.7	74.0	-28.3	Peak	Vertical
	11038.5	35.2	14.1	49.3	74.0	-24.7	Peak	Vertical
06	4876.0	45.5	3.1	48.6	74.0	-25.4	Peak	Horizontal
	7375.0	37.0	8.6	45.6	74.0	-28.4	Peak	Horizontal
	10834.5	35.5	14.0	49.5	74.0	-24.5	Peak	Horizontal
	4876.0	42.1	3.1	45.2	74.0	-28.8	Peak	Vertical
	7434.5	38.2	8.5	46.7	74.0	-27.3	Peak	Vertical
	11047.0	35.9	14.2	50.1	74.0	-23.9	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-10-07	Test Mode	802.11g
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4816.5	40.9	3.0	43.9	74.0	-30.1	Peak	Horizontal
	7434.5	36.7	8.5	45.2	74.0	-28.8	Peak	Horizontal
	11769.5	36.4	12.5	48.9	74.0	-25.1	Peak	Horizontal
	7358.0	35.5	8.5	44.0	74.0	-30.0	Peak	Vertical
	8293.0	36.6	8.8	45.4	74.0	-28.6	Peak	Vertical
	11072.5	35.0	14.0	49.0	74.0	-25.0	Peak	Vertical
06	4876.0	42.3	3.1	45.4	74.0	-28.6	Peak	Horizontal
	8216.5	36.2	8.8	45.0	74.0	-29.0	Peak	Horizontal
	10928.0	35.5	14.1	49.6	74.0	-24.4	Peak	Horizontal
	3924.0	37.7	0.7	38.4	74.0	-35.6	Peak	Vertical
	4876.0	37.7	3.1	40.8	74.0	-33.2	Peak	Vertical
	11055.5	35.2	14.1	49.3	74.0	-24.7	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)  
 Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-10-07	Test Mode	802.11n-HT20
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4825.0	45.0	3.1	48.1	74.0	-25.9	Peak	Horizontal
	7426.0	36.4	8.5	44.9	74.0	-29.1	Peak	Horizontal
	11004.5	35.0	14.3	49.3	74.0	-24.7	Peak	Horizontal
	4825.0	45.0	3.1	48.1	74.0	-25.9	Peak	Vertical
	7426.0	36.4	8.5	44.9	74.0	-29.1	Peak	Vertical
	11004.5	35.0	14.3	49.3	74.0	-24.7	Peak	Vertical
06	4876.0	44.8	3.1	47.9	74.0	-26.1	Peak	Horizontal
	8497.0	36.3	9.1	45.4	74.0	-28.6	Peak	Horizontal
	11098.0	36.0	13.9	49.9	74.0	-24.1	Peak	Horizontal
	4867.5	42.6	3.0	45.6	74.0	-28.4	Peak	Vertical
	7383.5	36.3	8.6	44.9	74.0	-29.1	Peak	Vertical
	11055.5	35.3	14.1	49.4	74.0	-24.6	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)  
 Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-10-07	Test Mode	802.11n-HT40
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	7392.0	36.1	8.5	44.6	74.0	-29.4	Peak	Horizontal
	8488.5	36.2	9.1	45.3	74.0	-28.7	Peak	Horizontal
	11123.5	35.5	13.5	49.0	74.0	-25.0	Peak	Horizontal
	7545.0	36.5	8.6	45.1	74.0	-28.9	Peak	Vertical
	8259.0	36.1	8.7	44.8	74.0	-29.2	Peak	Vertical
	11098.0	35.0	13.9	48.9	74.0	-25.1	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)  
 Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-10-07	Test Mode	802.11ax-HE20
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	7366.5	36.6	8.6	45.2	74.0	-28.8	Peak	Horizontal
	8463.0	36.1	9.3	45.4	74.0	-28.6	Peak	Horizontal
	11047.0	34.7	14.2	48.9	74.0	-25.1	Peak	Horizontal
	4825.0	40.2	3.1	43.3	74.0	-30.7	Peak	Vertical
	7596.0	36.7	8.3	45.0	74.0	-29.0	Peak	Vertical
	12058.5	36.4	12.5	48.9	74.0	-25.1	Peak	Vertical
06	7366.5	36.1	8.6	44.7	74.0	-29.3	Peak	Horizontal
	8233.5	36.4	8.8	45.2	74.0	-28.8	Peak	Horizontal
	10962.0	34.6	14.1	48.7	74.0	-25.3	Peak	Horizontal
	4867.5	40.5	3.0	43.5	74.0	-30.5	Peak	Vertical
	7434.5	36.0	8.5	44.5	74.0	-29.5	Peak	Vertical
	10996.0	34.5	14.4	48.9	74.0	-25.1	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)  
 Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-10-07	Test Mode	802.11ax-HE40
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	7443.0	36.4	8.6	45.0	74.0	-29.0	Peak	Horizontal
	8267.5	36.0	8.6	44.6	74.0	-29.4	Peak	Horizontal
	11055.5	34.2	14.1	48.3	74.0	-25.7	Peak	Horizontal
	7689.5	36.7	8.1	44.8	74.0	-29.2	Peak	Vertical
	8497.0	36.4	9.1	45.5	74.0	-28.5	Peak	Vertical
	11157.5	34.5	13.8	48.3	74.0	-25.7	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)  
 Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



**Filter 3#**

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-12-19	Test Mode	802.11b
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
11	7451.5	37.30	8.60	45.90	74.0	-28.1	Peak	Horizontal
	8097.5	37.60	9.40	47.00	74.0	-27.0	Peak	Horizontal
	11021.5	36.00	14.10	50.10	74.0	-23.9	Peak	Horizontal
	7485.5	37.20	8.60	45.80	74.0	-28.2	Peak	Vertical
	8097.5	37.60	9.40	47.00	74.0	-27.0	Peak	Vertical
	11489.0	36.40	13.80	50.20	74.0	-23.8	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-12-19	Test Mode	802.11g
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
11	7494.0	36.80	8.60	45.40	74.0	-28.6	Peak	Horizontal
	8055.0	36.50	9.50	46.00	74.0	-28.0	Peak	Horizontal
	11523.0	36.10	13.60	49.70	74.0	-24.3	Peak	Horizontal
	7417.5	37.10	8.40	45.50	74.0	-28.5	Peak	Vertical
	7978.5	36.80	9.20	46.00	74.0	-28.0	Peak	Vertical
	11140.5	36.30	13.70	50.00	74.0	-24.0	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)  
 Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-12-19	Test Mode	802.11n-HT20
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
11	7434.5	37.4	8.5	45.9	74.0	-28.1	Peak	Horizontal
	8250.5	36.5	8.7	45.2	74.0	-28.8	Peak	Horizontal
	11497.5	36.1	13.7	49.8	74.0	-24.2	Peak	Horizontal
	7511.0	36.8	8.4	45.2	74.0	-28.8	Peak	Vertical
	8148.5	36.4	9.3	45.7	74.0	-28.3	Peak	Vertical
	10885.5	35.5	14.0	49.5	74.0	-24.5	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)  
 Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)




Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2023-12-19	Test Mode	802.11ax-HE20
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
11	7502.5	37.7	8.5	46.2	74.0	-27.8	Peak	Horizontal
	8140.0	36.3	9.2	45.5	74.0	-28.5	Peak	Horizontal
	10919.5	35.3	14.0	49.3	74.0	-24.7	Peak	Horizontal
	7502.5	36.9	8.5	45.4	74.0	-28.6	Peak	Vertical
	8055.0	37.4	9.5	46.9	74.0	-27.1	Peak	Vertical
	11489.0	36.5	13.8	50.3	74.0	-23.7	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)  
 Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

**The Result of Radiated Emission below 1GHz:**

Site: WZ-AC1	Test Date: 2023-10-12
Limit: FCC_Part 15.209_RSE(3m)	Engineer: Carl Jiang
Probe: FMZB1519_0.009-30MHz	Polarity: Coaxial
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11b at 2462MHz	

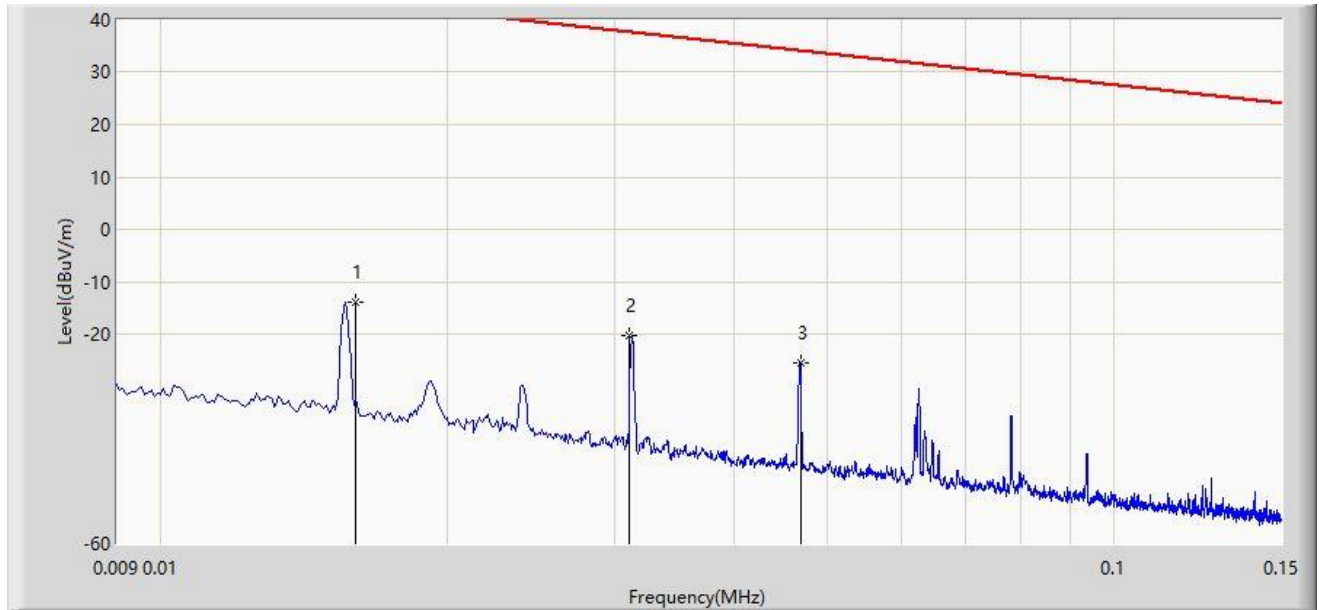

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	0.016	-13.867	66.097	-57.373	43.505	-79.964	PK
2		0.031	-20.153	59.808	-57.916	37.764	-79.961	PK
3		0.047	-25.562	54.395	-59.713	34.151	-79.957	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: WZ-AC1	Test Date: 2023-10-12
Limit: FCC_Part 15.209_RSE(3m)	Engineer: Carl Jiang
Probe: FMZB1519_0.009-30MHz	Polarity: Coaxial
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11b at 2462MHz	

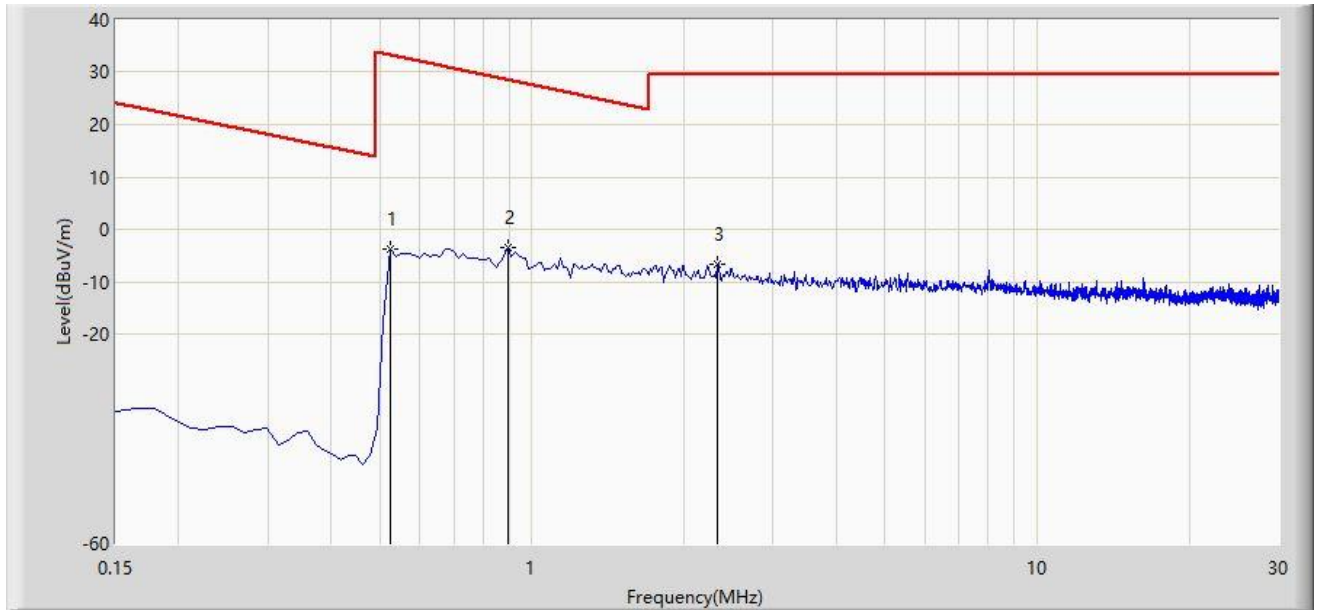

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		0.523	-3.903	35.942	-37.138	33.235	-39.845	PK
2	*	0.896	-3.593	36.228	-32.165	28.573	-39.821	PK
3		2.329	-6.570	33.219	-36.070	29.500	-39.789	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: WZ-AC1	Test Date: 2023-10-12
Limit: FCC_Part 15.209_RSE(3m)	Engineer: Carl Jiang
Probe: FMZB1519_0.009-30MHz	Polarity: Coplanar
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11b at 2462MHz	

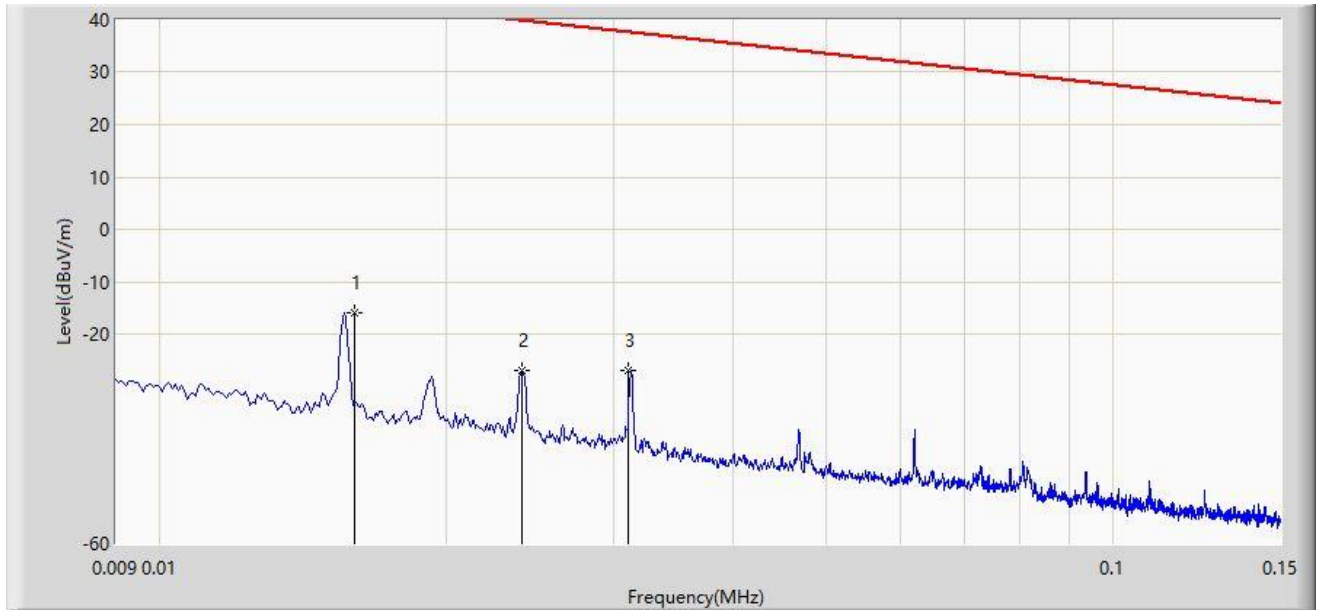

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	0.016	-15.896	64.068	-59.402	43.505	-79.964	PK
2		0.024	-26.960	53.002	-66.946	39.985	-79.962	PK
3		0.031	-26.955	53.006	-64.718	37.764	-79.961	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: WZ-AC1	Test Date: 2023-10-12
Limit: FCC_Part 15.209_RSE(3m)	Engineer: Carl Jiang
Probe: FMZB1519_0.009-30MHz	Polarity: Coplanar
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11b at 2462MHz	

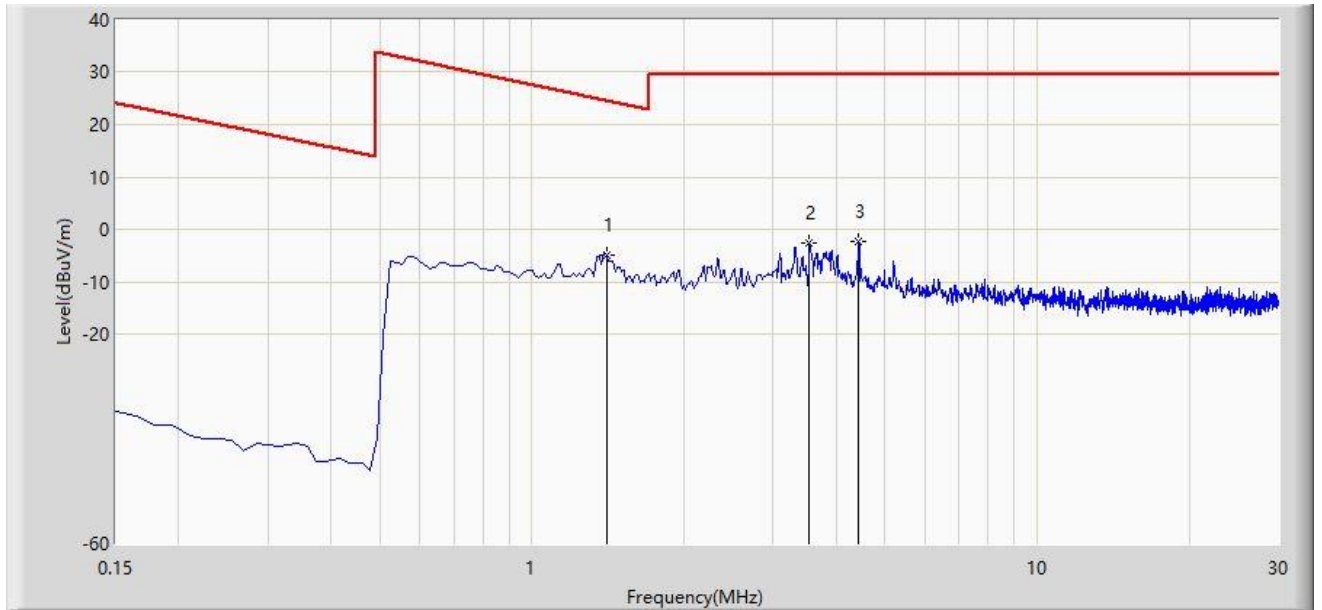

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	1.404	-4.802	34.995	-29.485	24.682	-39.797	PK
2		3.538	-2.608	37.158	-32.108	29.500	-39.766	PK
3		4.433	-2.188	37.551	-31.688	29.500	-39.739	PK

Note 1: " \* ", means this data is the worst emission level.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.



Site: WZ-AC1	Test Date: 2023-08-22
Limit: FCC_Part 15.209_RSE(3m)	Engineer: Carl Jiang
Probe: VULB 9168_25-2000MHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11b at 2462MHz	

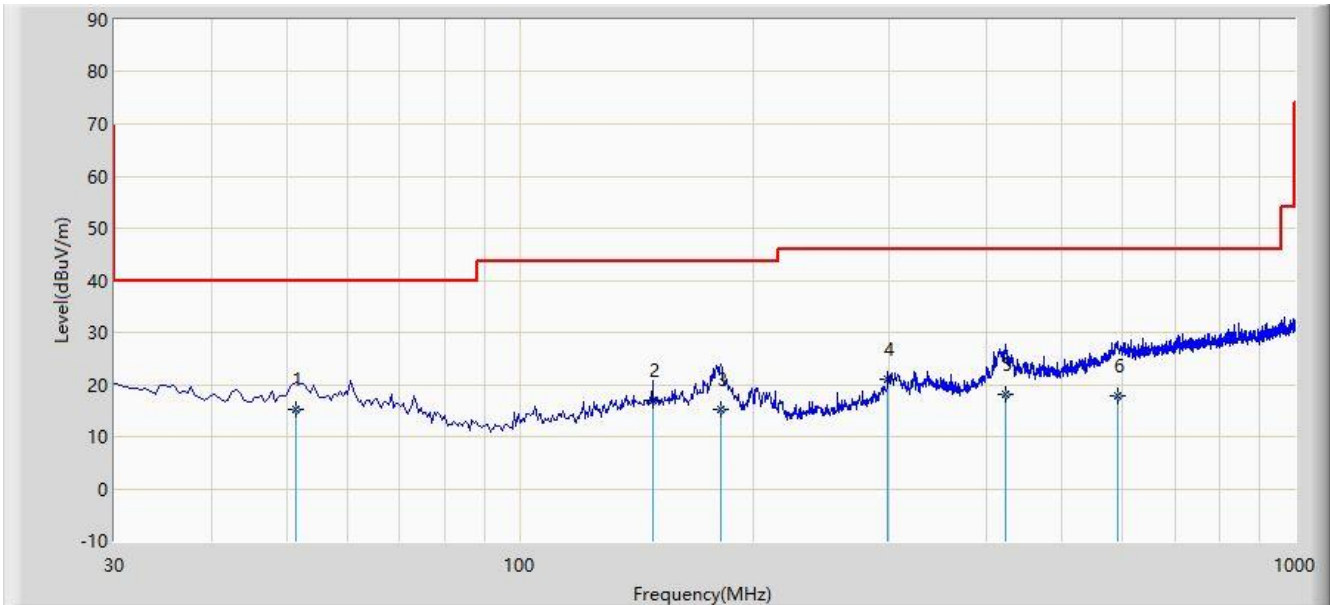

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	51.340	15.082	-3.500	-24.918	40.000	18.582	QP
2		148.340	16.854	-1.200	-26.646	43.500	18.055	QP
3		181.805	15.149	-1.500	-28.351	43.500	16.649	QP
4		298.700	20.969	2.500	-25.031	46.000	18.469	QP
5		423.335	18.166	-3.400	-27.834	46.000	21.566	QP
6		591.630	17.747	-7.500	-28.253	46.000	25.247	QP

Note 1: " \* ", means this data is the worst emission level.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: WZ-AC1	Test Date: 2023-08-22
Limit: FCC_Part 15.209_RSE(3m)	Engineer: Carl Jiang
Probe: VULB 9168_25-2000MHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11b at 2462MHz	

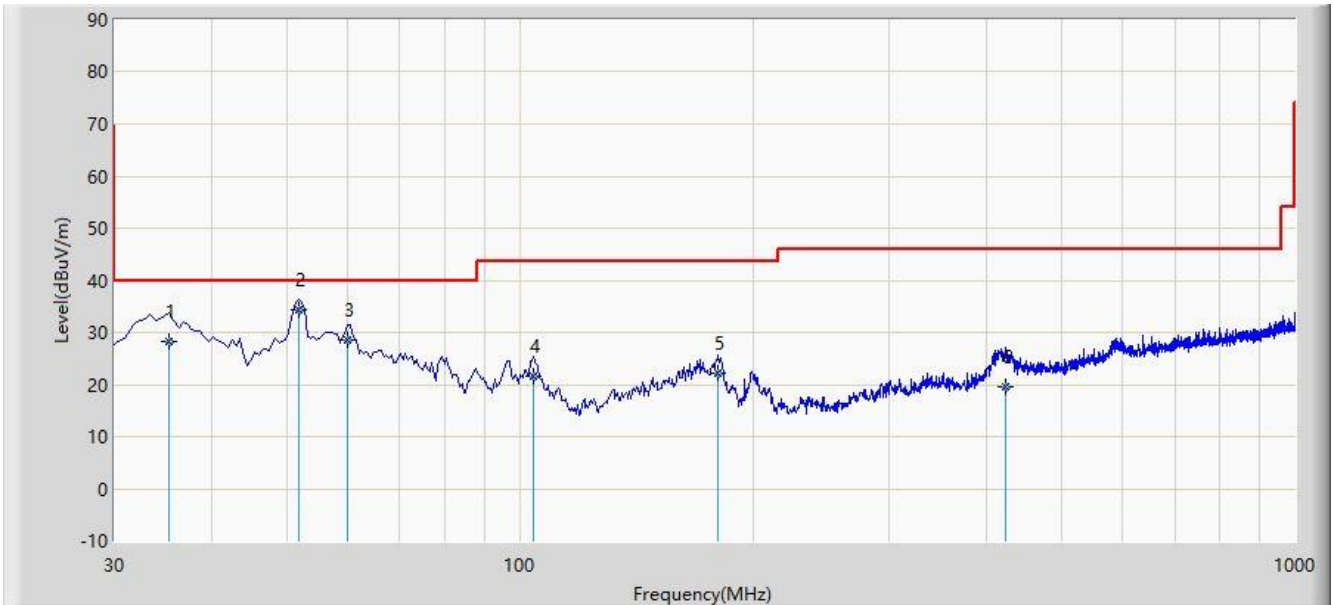

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		35.335	28.229	10.700	-11.771	40.000	17.529	QP
2	*	51.825	34.474	15.900	-5.526	40.000	18.574	QP
3		60.070	28.553	10.600	-11.447	40.000	17.952	QP
4		104.200	21.674	7.500	-21.826	43.500	14.174	QP
5		180.350	22.049	5.200	-21.451	43.500	16.848	QP
6		423.820	19.691	-1.900	-26.309	46.000	21.591	QP

Note 1: " \* ", means this data is the worst emission level.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: WZ-AC1	Test Date: 2023-09-22
Limit: FCC_Part 15.209_RSE(3m)	Engineer: Ajin Fan
Probe: BBHA9170_993_18-40GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11b at 2462MHz	

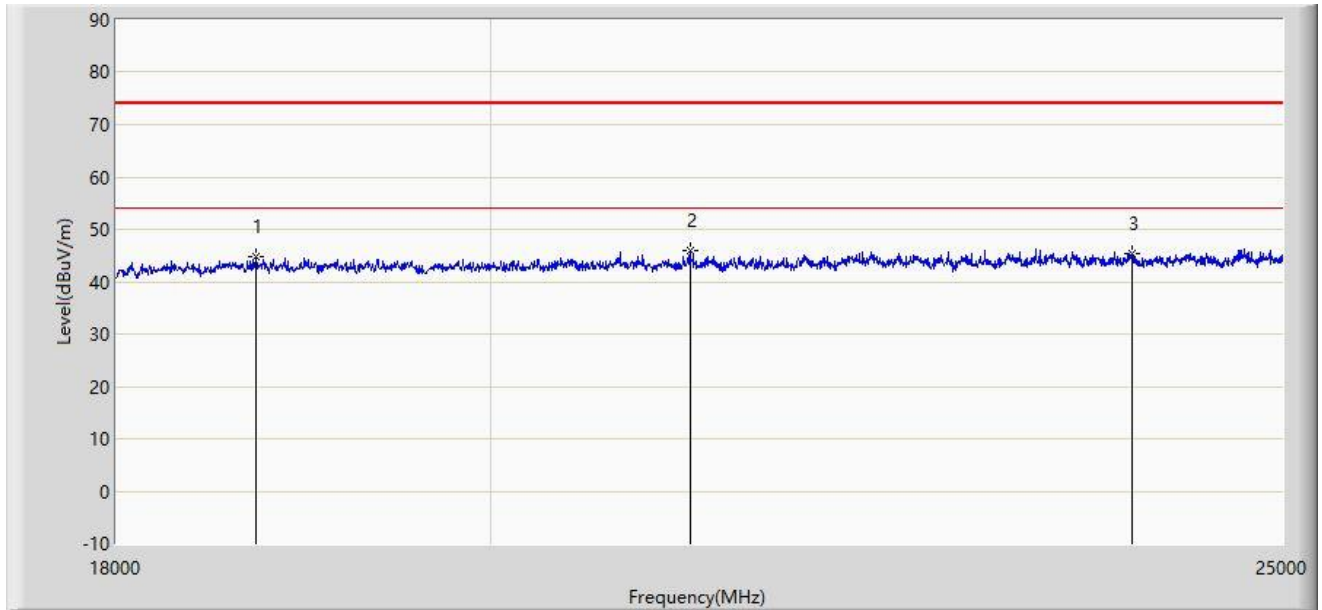

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		18721.000	44.898	55.198	-29.102	74.000	-10.300	PK
2	*	21160.500	46.084	54.296	-27.916	74.000	-8.211	PK
3		23964.000	45.350	52.404	-28.650	74.000	-7.054	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Note 4: Average measurement was not performed when peak measure level was lower than the average limit.

Site: WZ-AC1	Test Date: 2023-09-22
Limit: FCC_Part 15.209_RSE(3m)	Engineer: Ajin Fan
Probe: BBHA9170_993_18-40GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11b at 2462MHz	

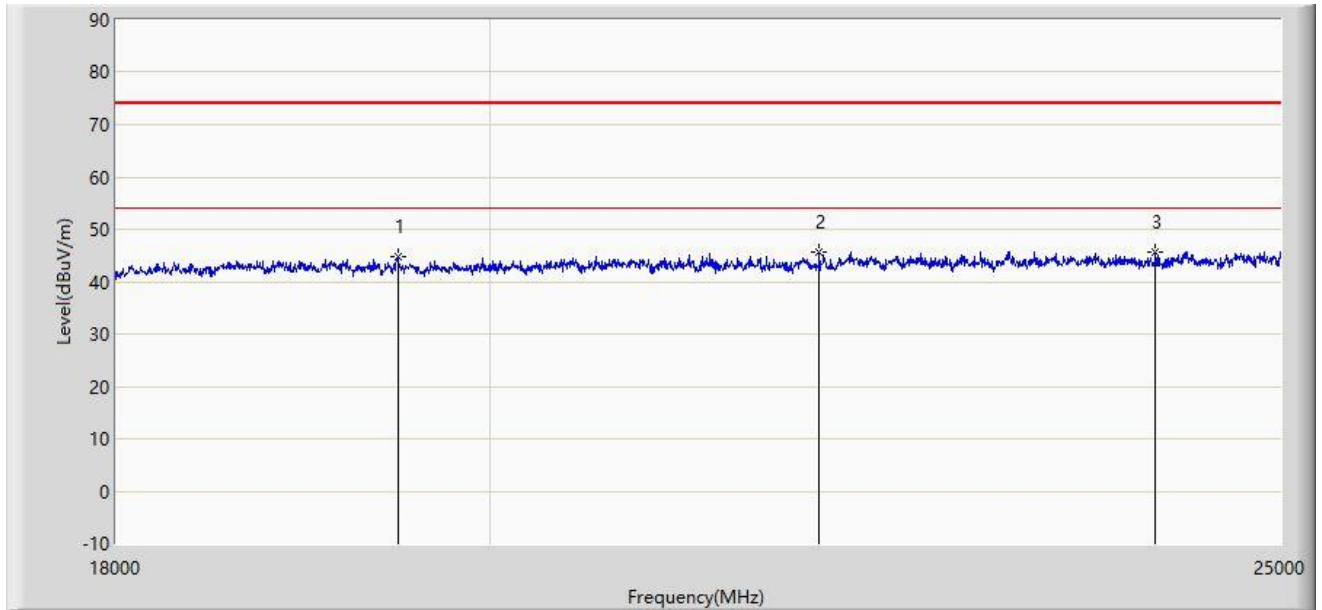

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		19491.000	44.848	54.599	-29.152	74.000	-9.751	PK
2	*	21951.500	45.697	54.150	-28.303	74.000	-8.453	PK
3		24135.500	45.583	52.587	-28.417	74.000	-7.004	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).


Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Note 4: Average measurement was not performed when peak measure level was lower than the average limit.

## 7. Radiated Restricted Band Edge Measurement Test Result

### Filter 1#

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11b at 2412MHz	

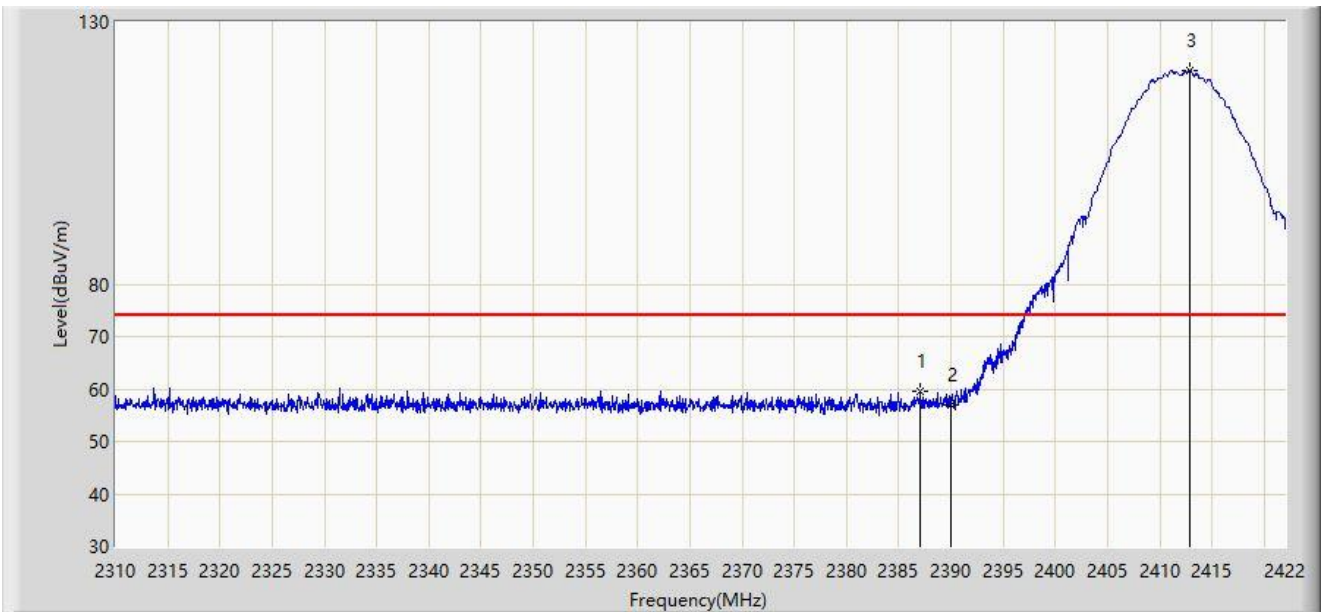


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2387.056	59.541	28.285	-14.459	74.000	31.256	PK
2		2390.000	56.996	25.742	-17.004	74.000	31.254	PK
3		2412.872	120.777	89.525	N/A	N/A	31.252	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11b at 2412MHz	

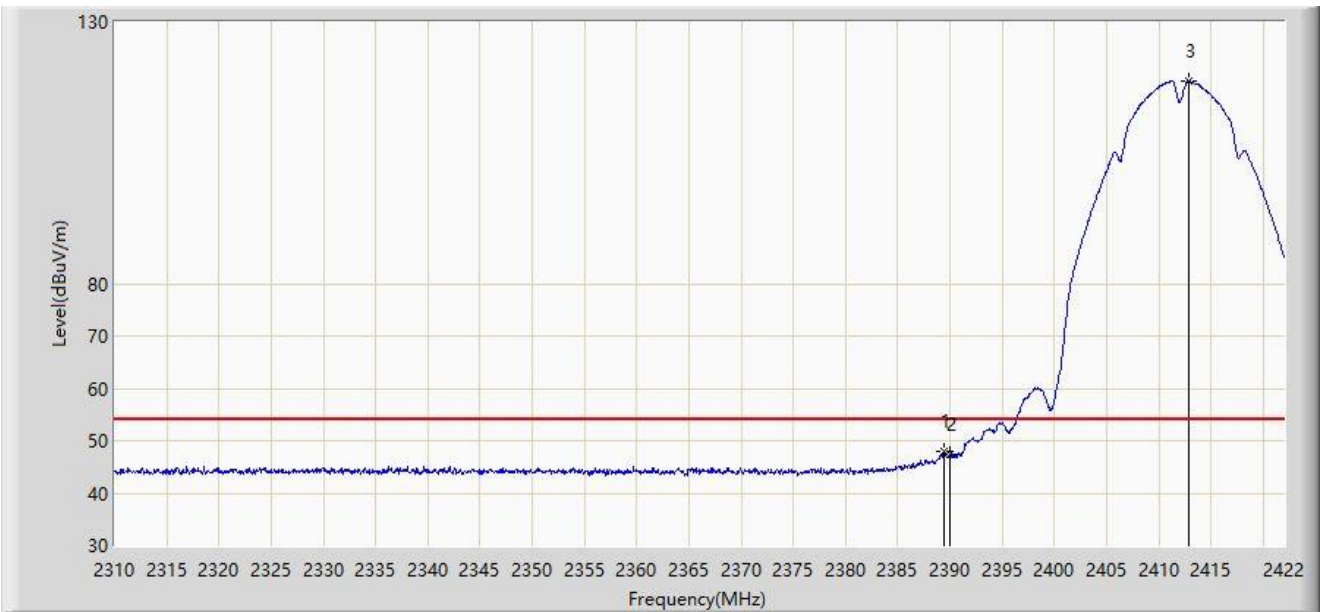


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2389.408	47.839	16.585	-6.161	54.000	31.255	AV
2		2390.000	47.290	16.036	-6.710	54.000	31.254	AV
3		2412.872	118.743	87.491	N/A	N/A	31.252	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11b at 2412MHz	

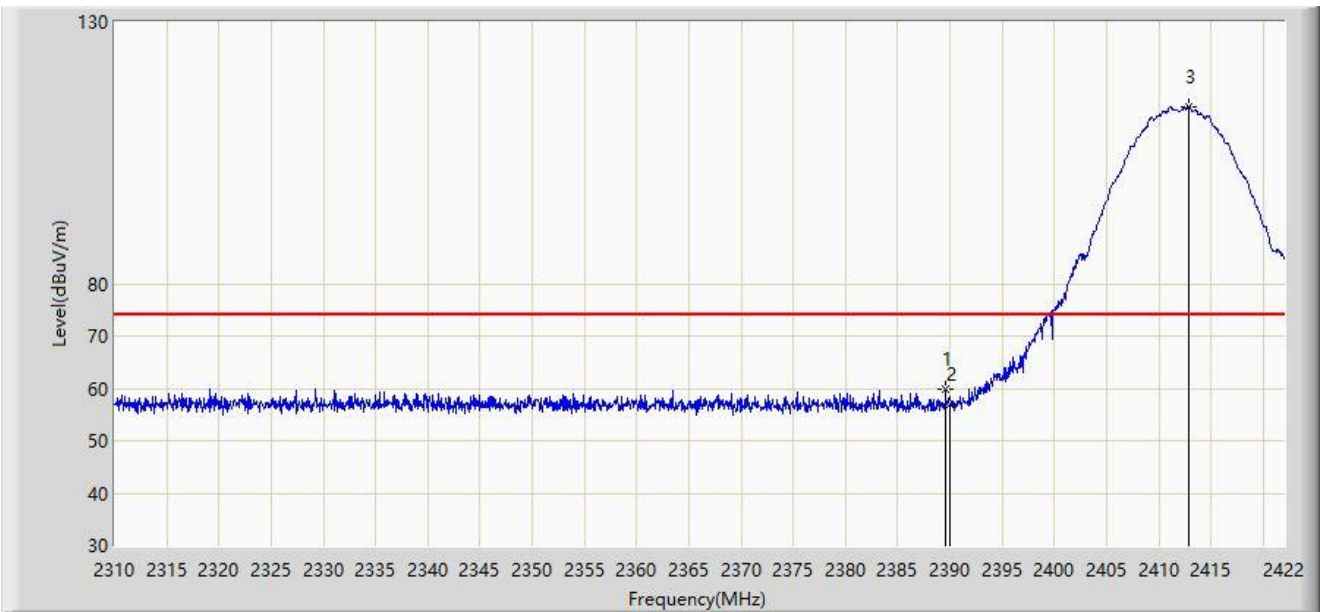


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2389.576	59.955	28.701	-14.045	74.000	31.254	PK
2		2390.000	57.026	25.772	-16.974	74.000	31.254	PK
3		2412.928	113.861	82.609	N/A	N/A	31.252	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11b at 2412MHz	

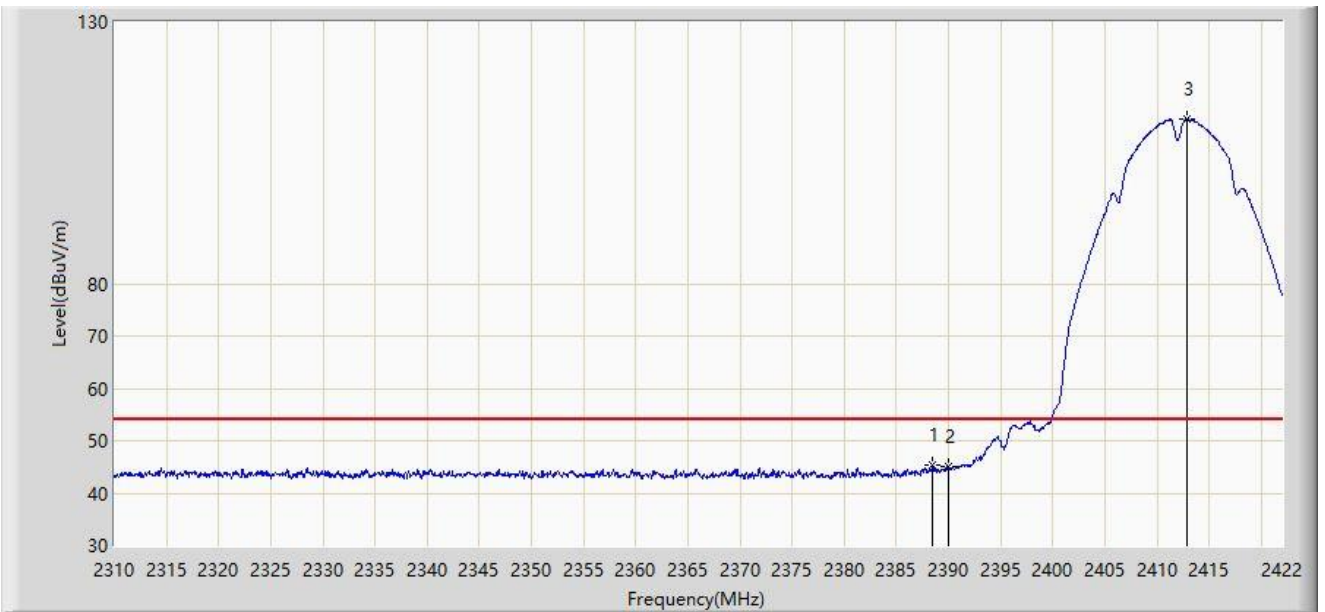

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2388.456	45.456	14.201	-8.544	54.000	31.255	AV
2		2390.000	44.964	13.710	-9.036	54.000	31.254	AV
3		2412.816	111.538	80.286	N/A	N/A	31.252	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11b at 2462MHz	



No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2462.920	120.946	89.721	N/A	N/A	31.225	PK
2		2483.500	59.633	28.407	-14.367	74.000	31.226	PK
3	*	2490.016	62.143	30.912	-11.857	74.000	31.231	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11b at 2462MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.312	119.076	87.850	N/A	N/A	31.226	AV
2		2483.500	48.155	16.929	-5.845	54.000	31.226	AV
3	*	2488.696	52.364	21.134	-1.636	54.000	31.230	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11b at 2462MHz	

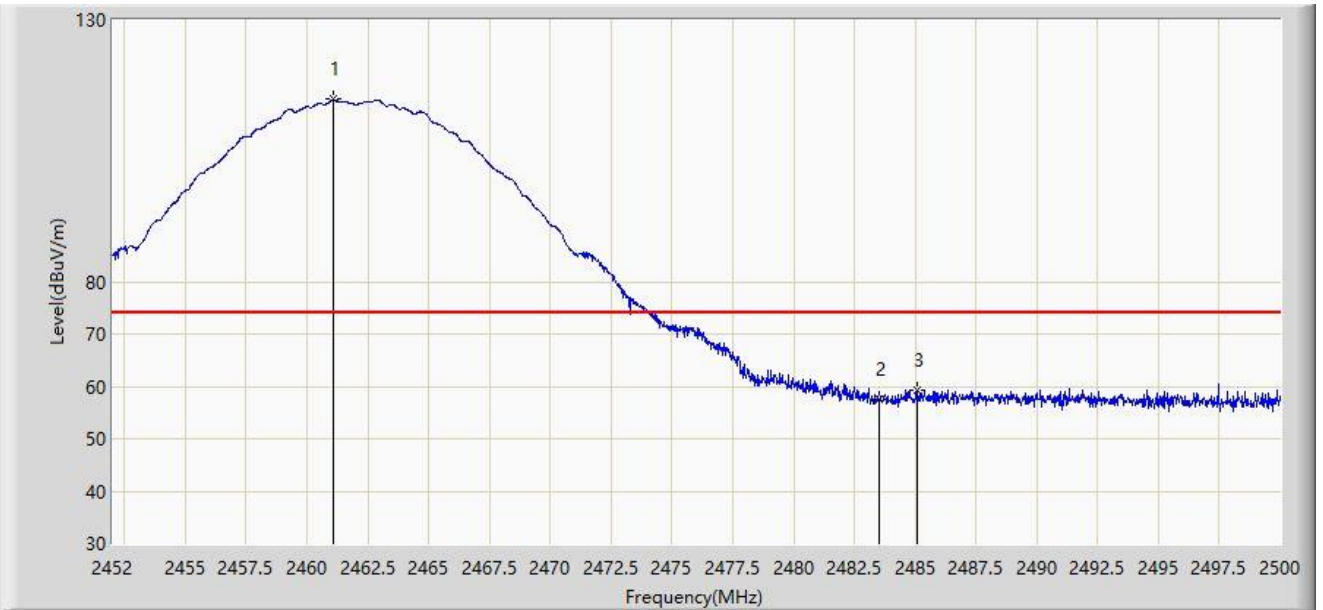

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2461.096	114.793	83.567	N/A	N/A	31.226	PK
2		2483.500	57.446	26.220	-16.554	74.000	31.226	PK
3	*	2485.072	59.225	27.998	-14.775	74.000	31.227	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11b at 2462MHz	




No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2461.240	112.785	81.559	N/A	N/A	31.226	AV
2		2483.500	45.080	13.854	-8.920	54.000	31.226	AV
3	*	2484.976	47.074	15.847	-6.926	54.000	31.227	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11g at 2412MHz	

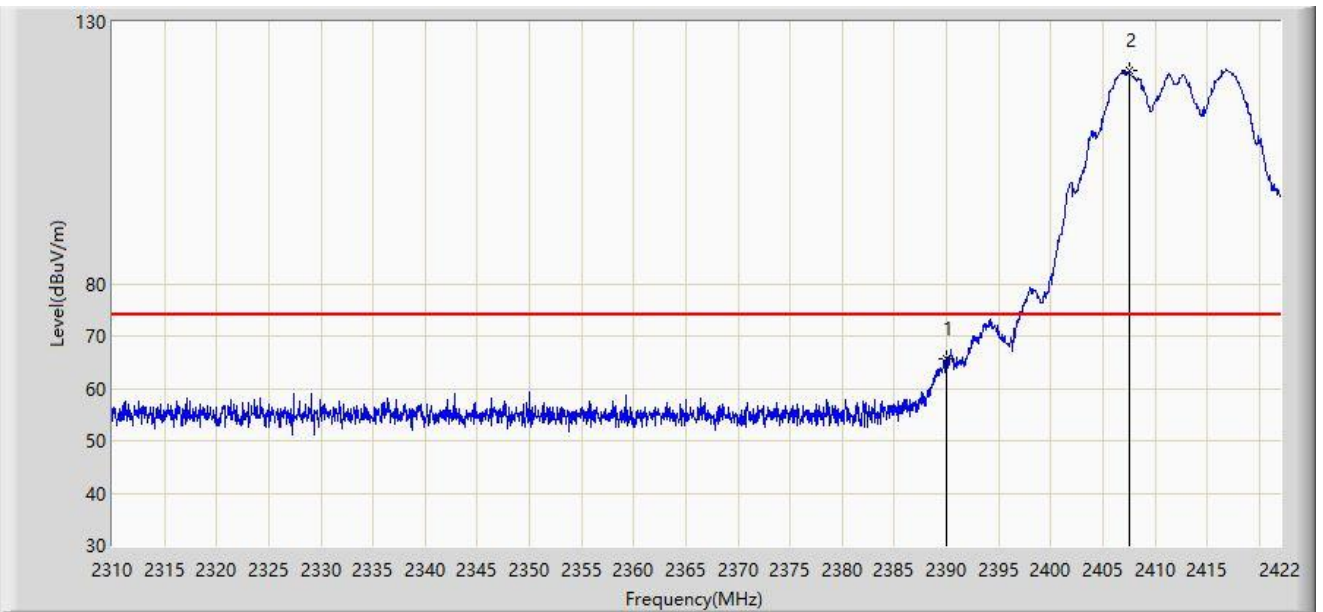


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2390.000	65.712	34.458	-8.288	74.000	31.254	PK
2		2407.496	120.688	89.433	N/A	N/A	31.256	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11g at 2412MHz	

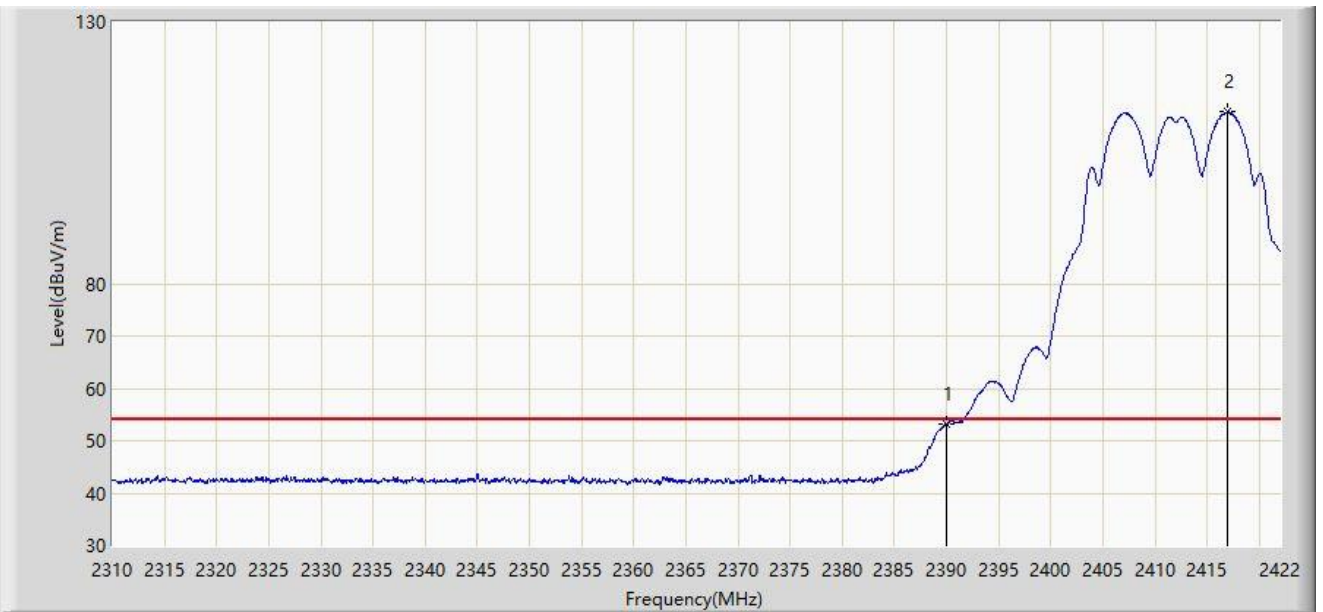


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2390.000	53.233	21.979	-0.767	54.000	31.254	AV
2		2417.016	112.801	81.551	N/A	N/A	31.249	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11g at 2412MHz	

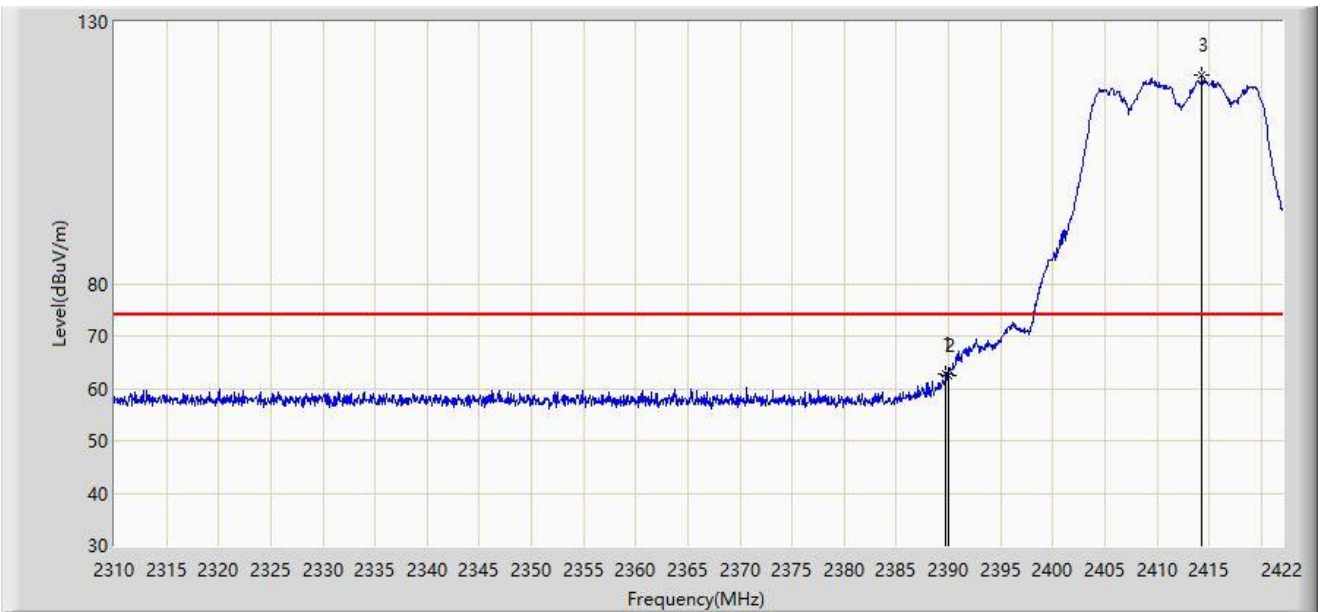


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2389.744	62.781	31.527	-11.219	74.000	31.254	PK
2		2390.000	62.541	31.287	-11.459	74.000	31.254	PK
3		2414.328	119.712	88.461	N/A	N/A	31.251	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11g at 2412MHz	

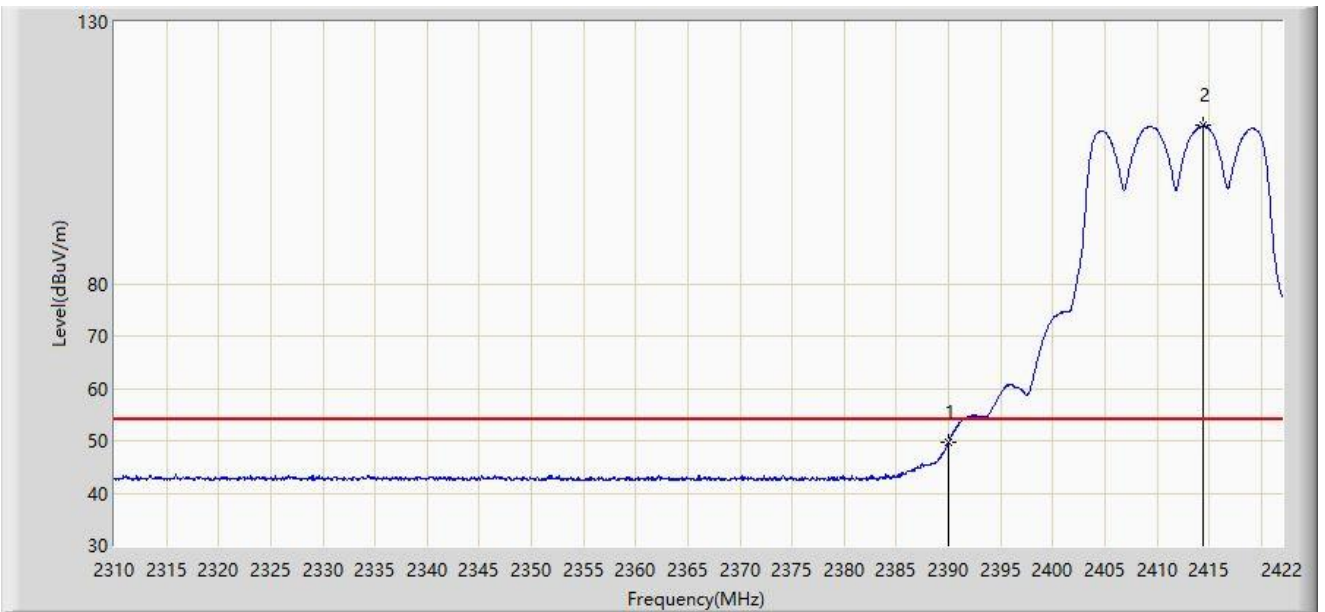

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	49.624	18.370	-4.376	54.000	31.254	AV
2		2414.384	110.179	78.928	N/A	N/A	31.251	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11g at 2437MHz	

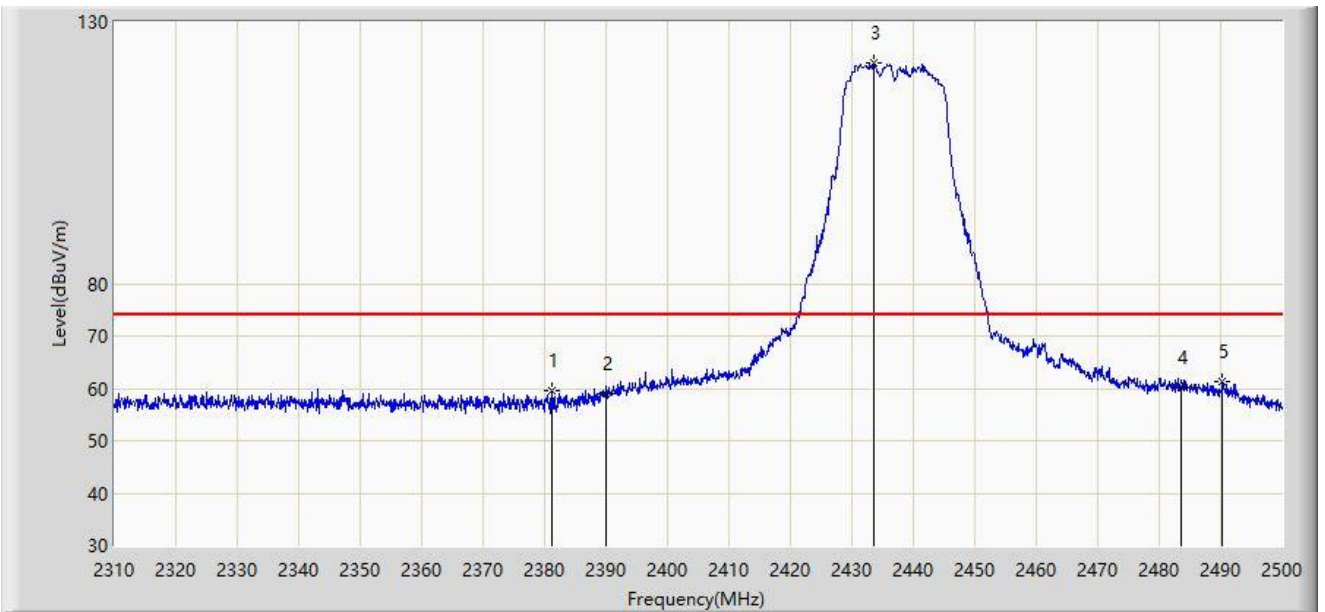


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2381.250	59.693	28.423	-14.307	74.000	31.269	PK
2		2390.000	58.943	27.689	-15.057	74.000	31.254	PK
3		2433.595	122.127	90.915	N/A	N/A	31.212	PK
4		2483.500	60.245	29.019	-13.755	74.000	31.226	PK
5	*	2490.310	61.322	30.091	-12.678	74.000	31.231	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11g at 2437MHz	

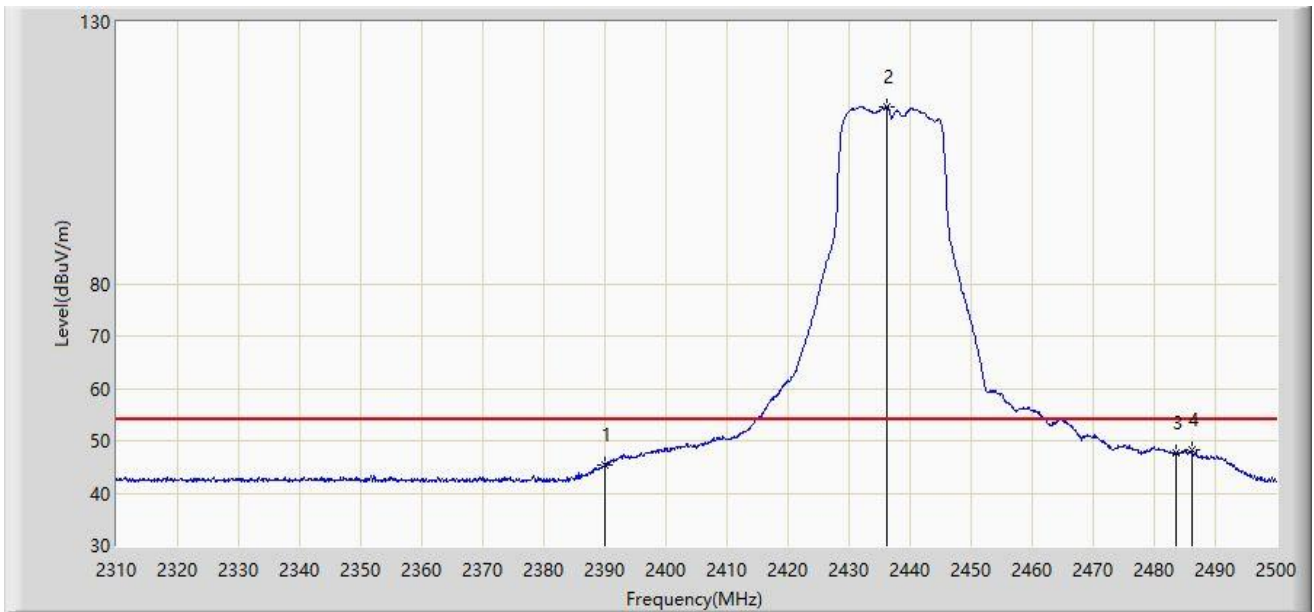


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2390.000	45.325	14.071	-8.675	54.000	31.254	AV
2		2436.255	113.778	82.571	N/A	N/A	31.207	AV
3		2483.500	47.622	16.396	-6.378	54.000	31.226	AV
4	*	2486.130	48.166	16.938	-5.834	54.000	31.228	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11g at 2437MHz	

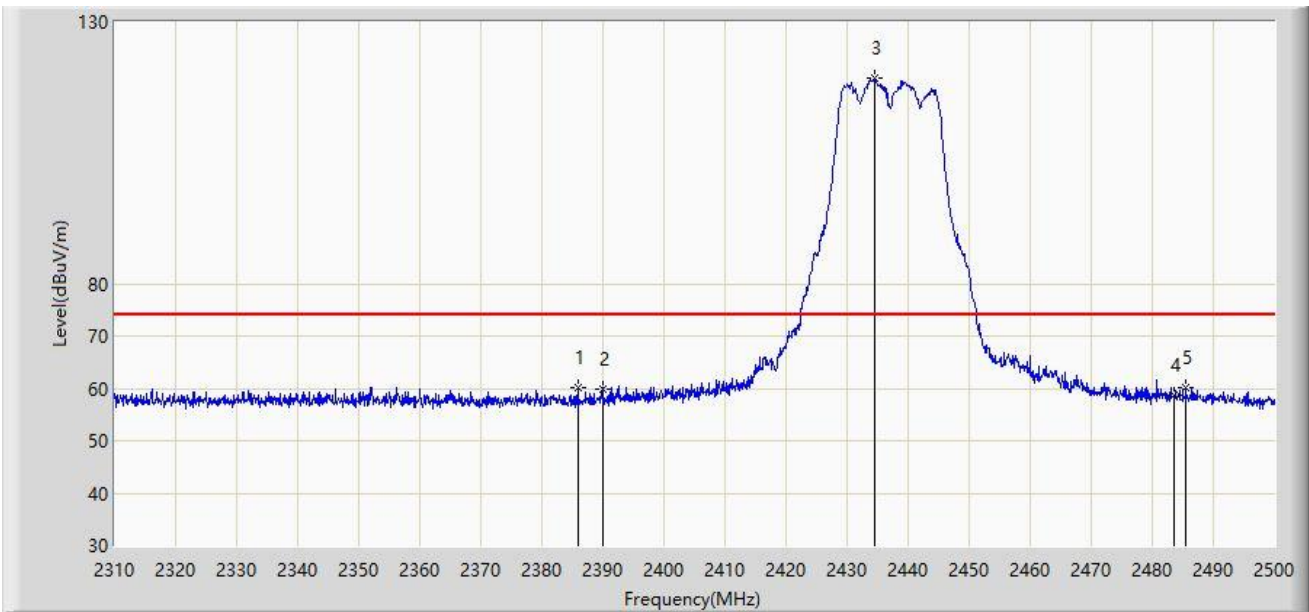


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2385.905	60.035	28.778	-13.965	74.000	31.257	PK
2		2390.000	59.851	28.597	-14.149	74.000	31.254	PK
3		2434.640	119.222	88.012	N/A	N/A	31.210	PK
4		2483.500	58.645	27.419	-15.355	74.000	31.226	PK
5	*	2485.465	60.113	28.885	-13.887	74.000	31.228	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11g at 2437MHz	

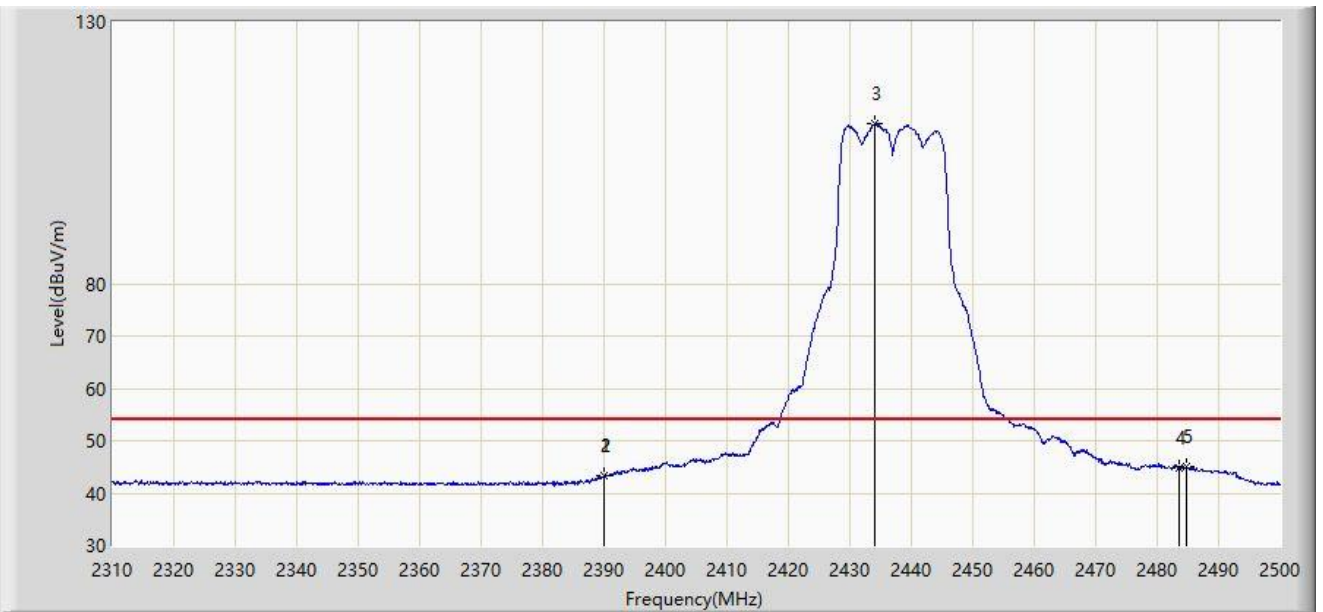

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2389.895	43.418	12.164	-10.582	54.000	31.254	AV
2		2390.000	43.383	12.129	-10.617	54.000	31.254	AV
3		2433.975	110.612	79.400	N/A	N/A	31.212	AV
4		2483.500	44.852	13.626	-9.148	54.000	31.226	AV
5	*	2484.705	45.051	13.824	-8.949	54.000	31.227	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11g at 2462MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.360	117.977	86.751	N/A	N/A	31.226	PK
2		2483.500	58.496	27.270	-15.504	74.000	31.226	PK
3	*	2486.032	63.008	31.780	-10.992	74.000	31.228	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11g at 2462MHz	

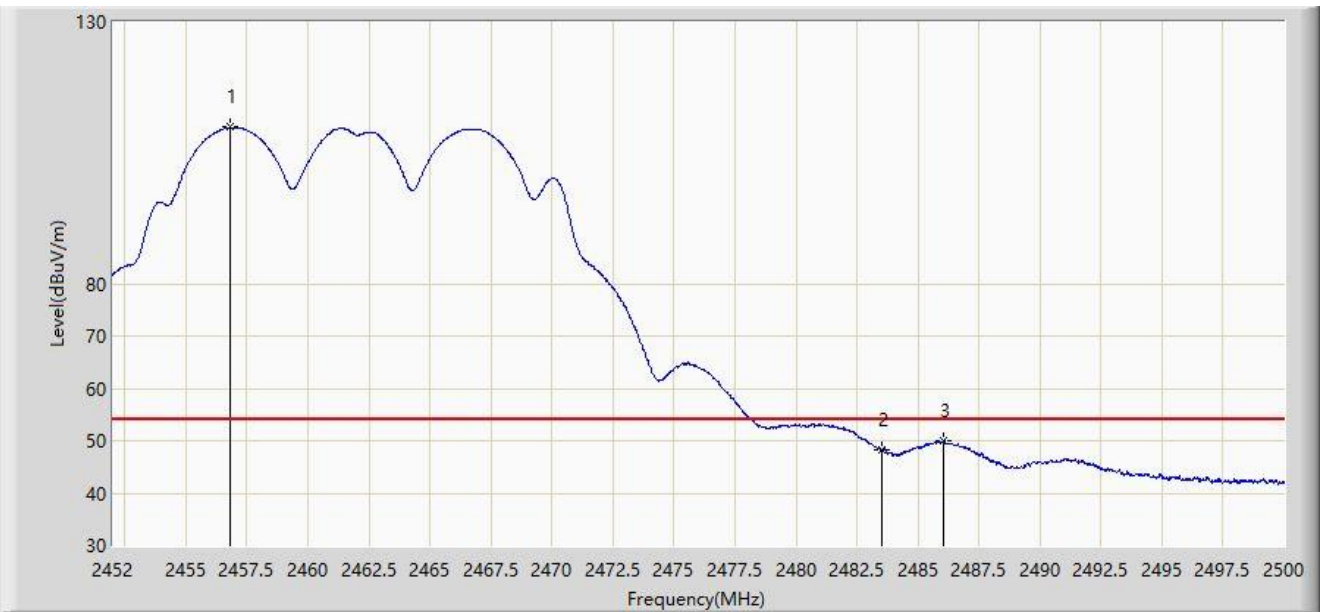


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2456.824	109.878	78.649	N/A	N/A	31.229	AV
2		2483.500	48.258	17.032	-5.742	54.000	31.226	AV
3	*	2486.056	49.865	18.637	-4.135	54.000	31.228	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11g at 2462MHz	

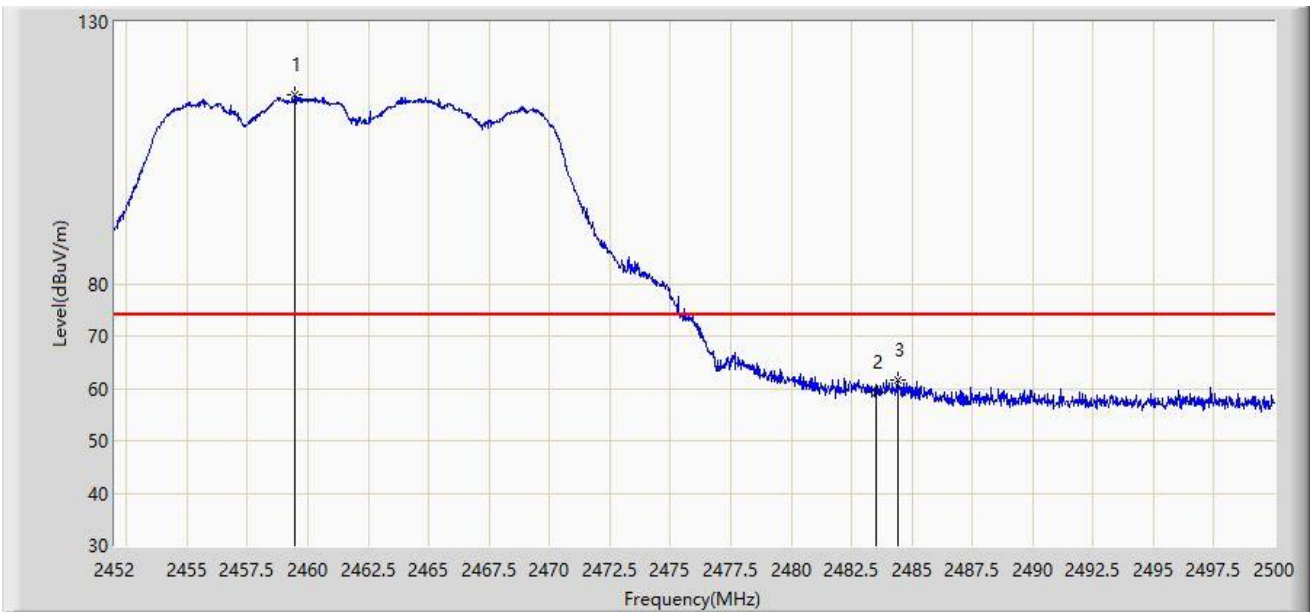


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2459.464	116.129	84.902	N/A	N/A	31.228	PK
2		2483.500	59.246	28.020	-14.754	74.000	31.226	PK
3	*	2484.424	61.682	30.455	-12.318	74.000	31.227	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11g at 2462MHz	

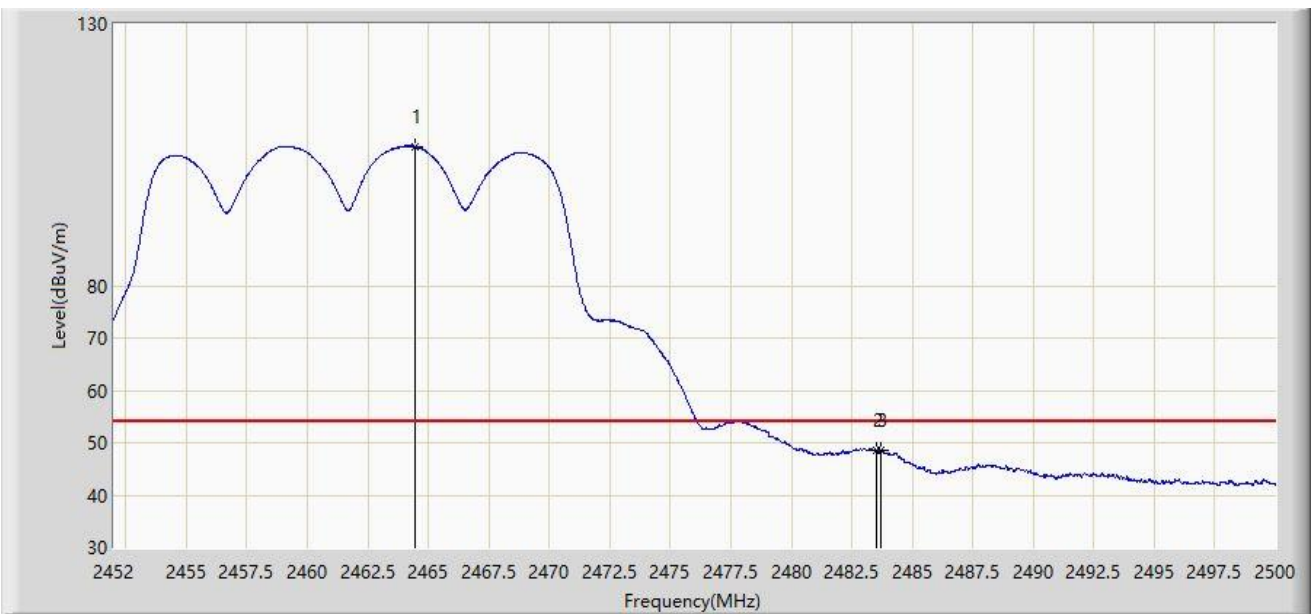

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2464.432	106.571	75.347	N/A	N/A	31.225	AV
2		2483.500	48.586	17.360	-5.414	54.000	31.226	AV
3	*	2483.704	48.684	17.458	-5.316	54.000	31.226	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

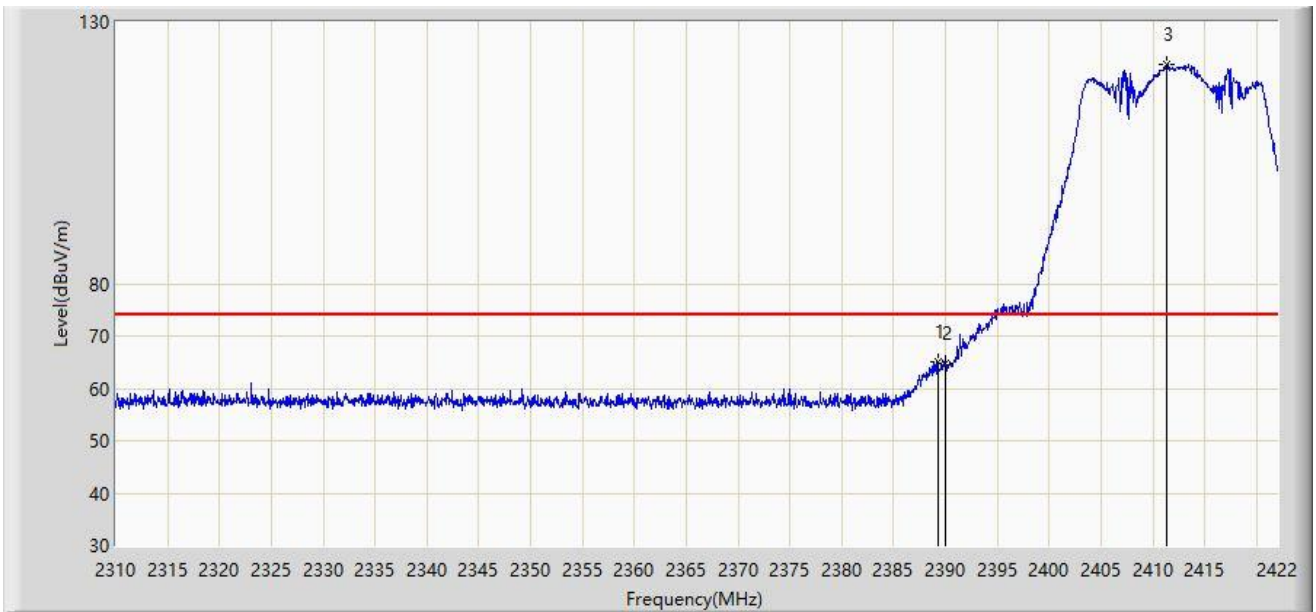


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2389.240	65.102	33.848	-8.898	74.000	31.254	PK
2		2390.000	64.856	33.602	-9.144	74.000	31.254	PK
3		2411.304	121.819	90.566	N/A	N/A	31.254	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

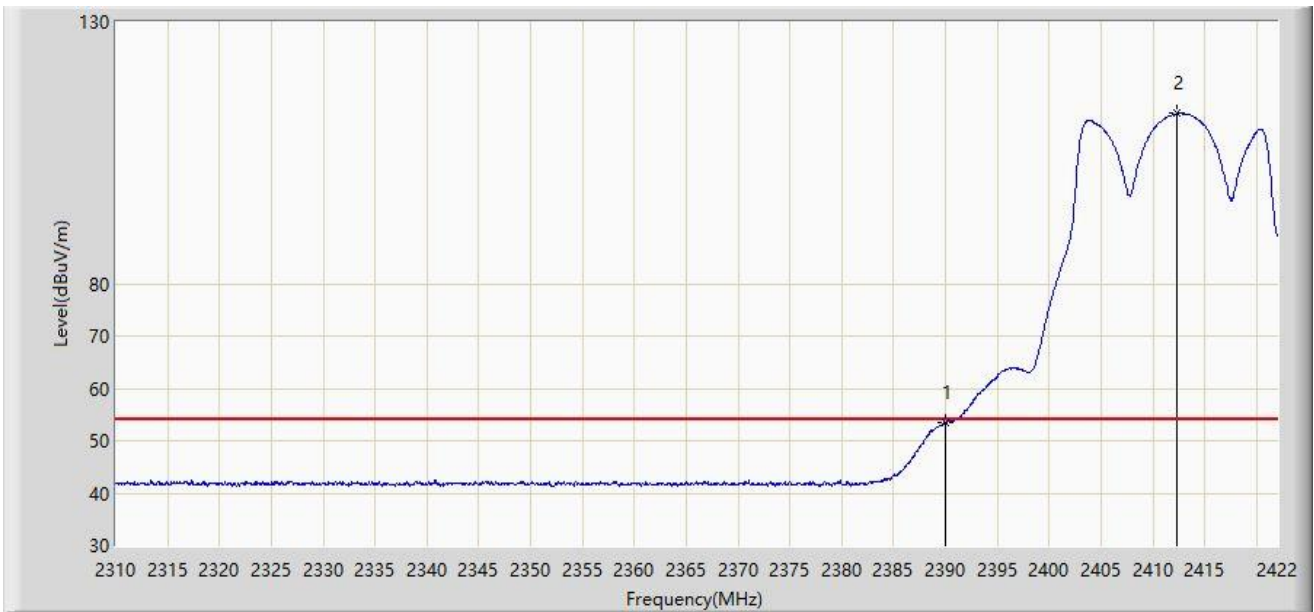


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2390.000	53.421	22.167	-0.579	54.000	31.254	AV
2		2412.256	112.480	81.227	N/A	N/A	31.252	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

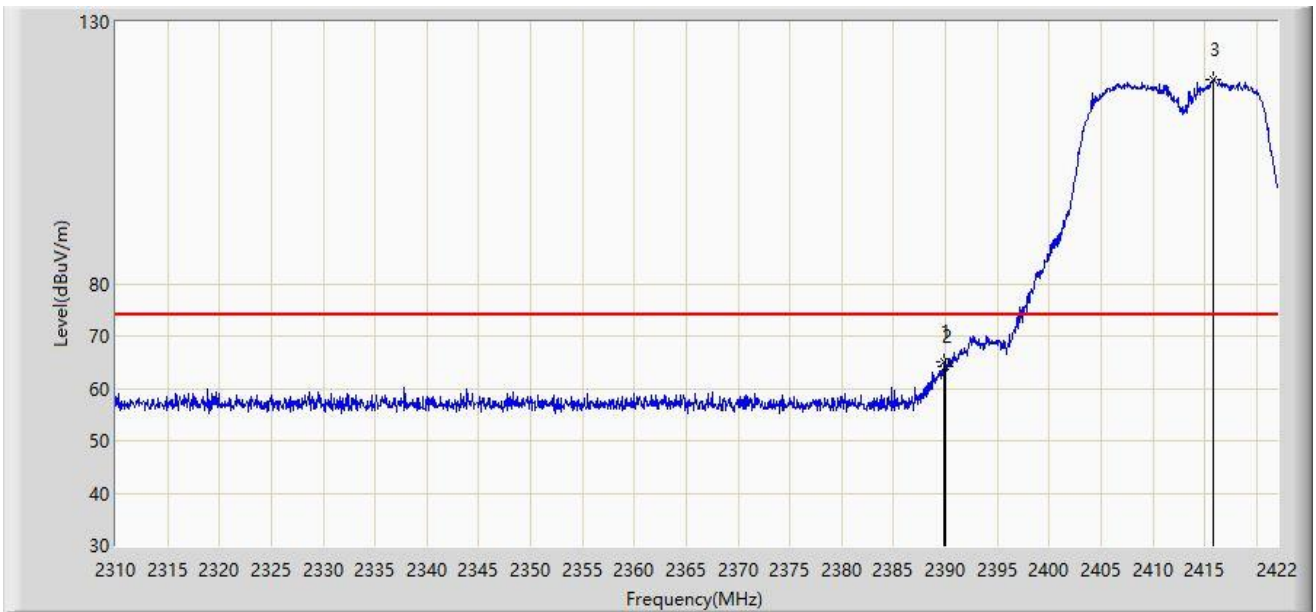


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2389.912	65.179	33.925	-8.821	74.000	31.254	PK
2		2390.000	64.289	33.035	-9.711	74.000	31.254	PK
3		2415.784	118.988	87.738	N/A	N/A	31.250	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

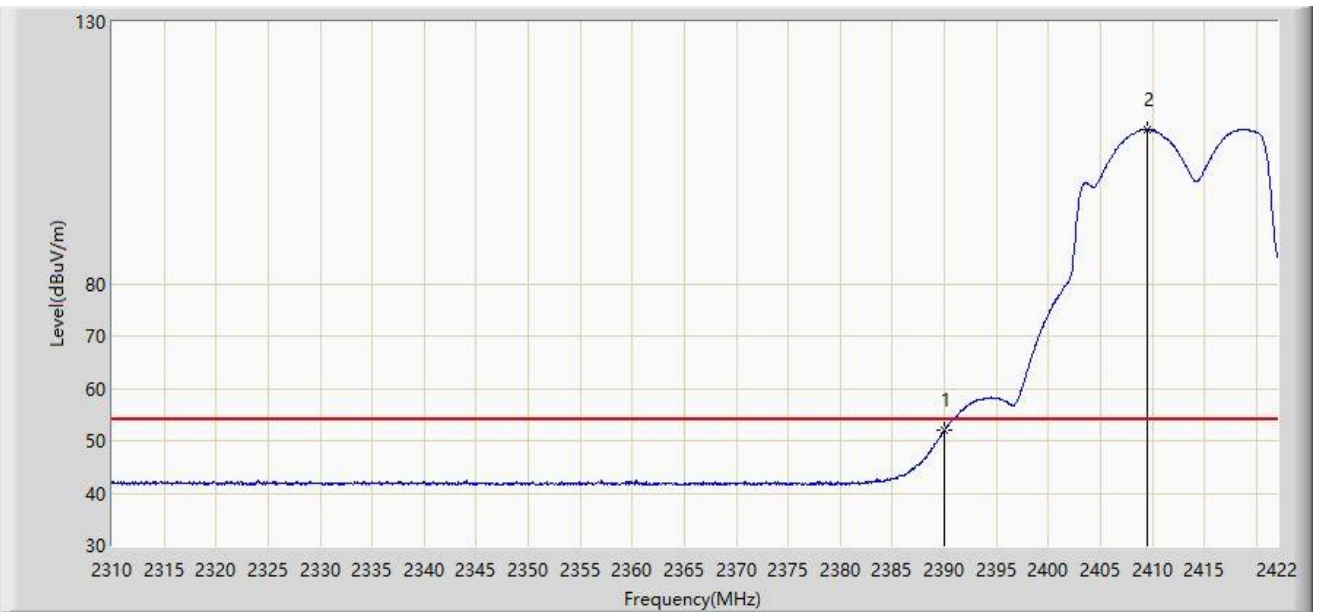


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2390.000	52.051	20.797	-1.949	54.000	31.254	AV
2		2409.456	109.426	78.172	N/A	N/A	31.254	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11n-HT20 at 2437MHz	

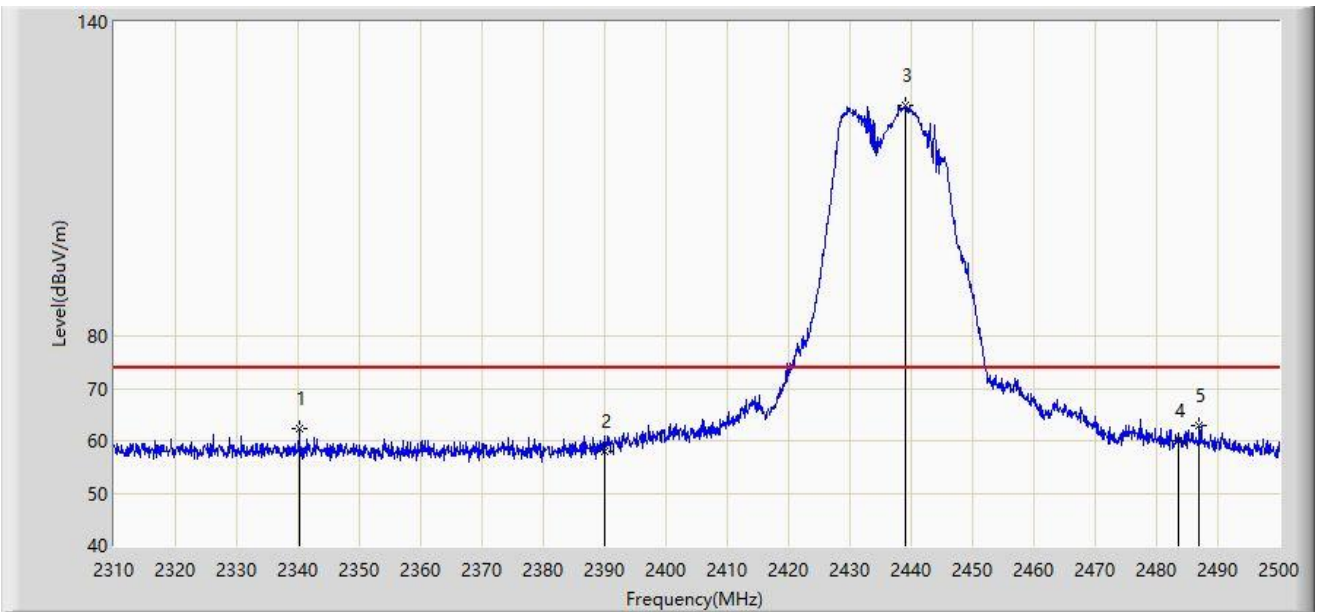


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2340.210	62.175	30.775	-11.825	74.000	31.400	PK
2		2390.000	57.994	26.740	-16.006	74.000	31.254	PK
3		2439.105	124.118	92.913	N/A	N/A	31.205	PK
4		2483.500	60.036	28.810	-13.964	74.000	31.226	PK
5	*	2486.890	62.986	31.757	-11.014	74.000	31.229	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11n-HT20 at 2437MHz	

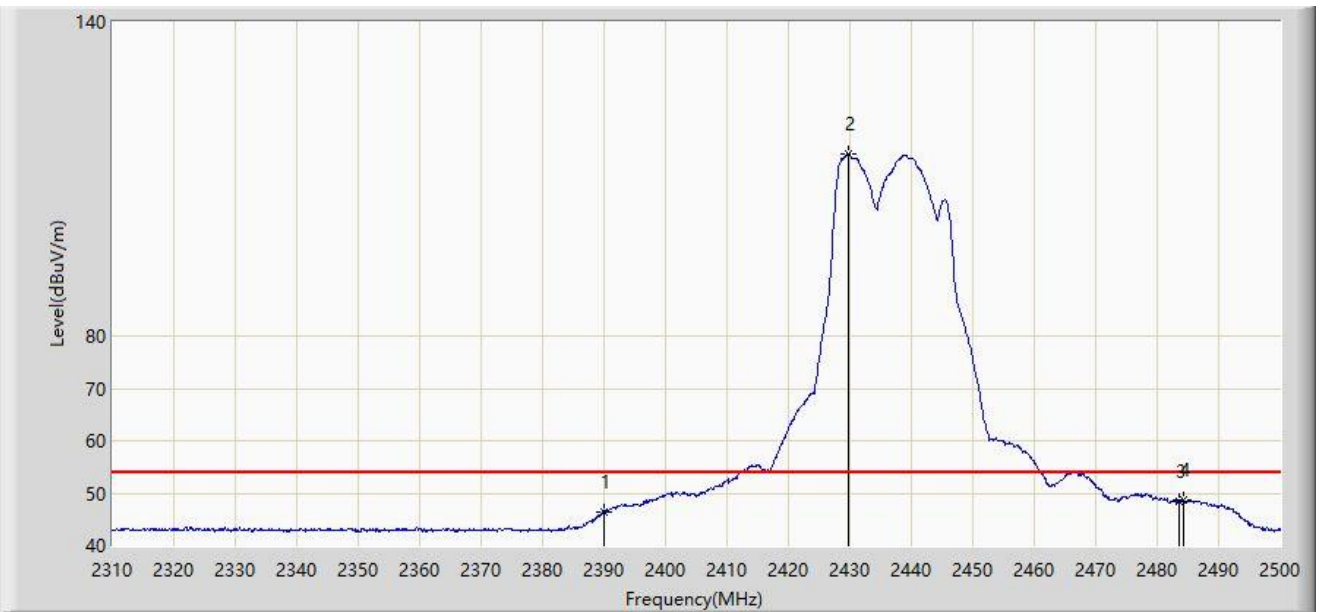


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2390.000	46.409	15.155	-7.591	54.000	31.254	AV
2		2429.700	114.748	83.528	N/A	N/A	31.220	AV
3		2483.500	48.264	17.038	-5.736	54.000	31.226	AV
4	*	2484.325	48.727	17.500	-5.273	54.000	31.227	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11n-HT20 at 2437MHz	

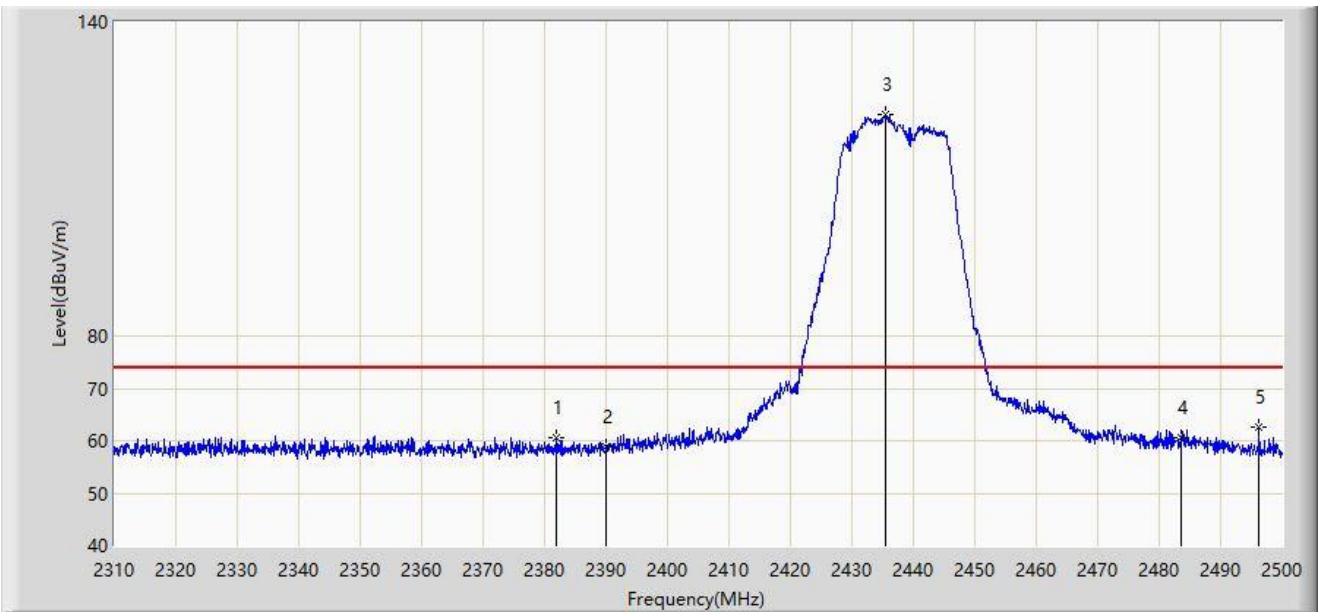


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2381.915	60.667	29.400	-13.333	74.000	31.267	PK
2		2390.000	58.841	27.587	-15.159	74.000	31.254	PK
3		2435.495	122.395	91.187	N/A	N/A	31.208	PK
4		2483.500	60.568	29.342	-13.432	74.000	31.226	PK
5	*	2496.295	62.673	31.438	-11.327	74.000	31.235	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11n-HT20 at 2437MHz	

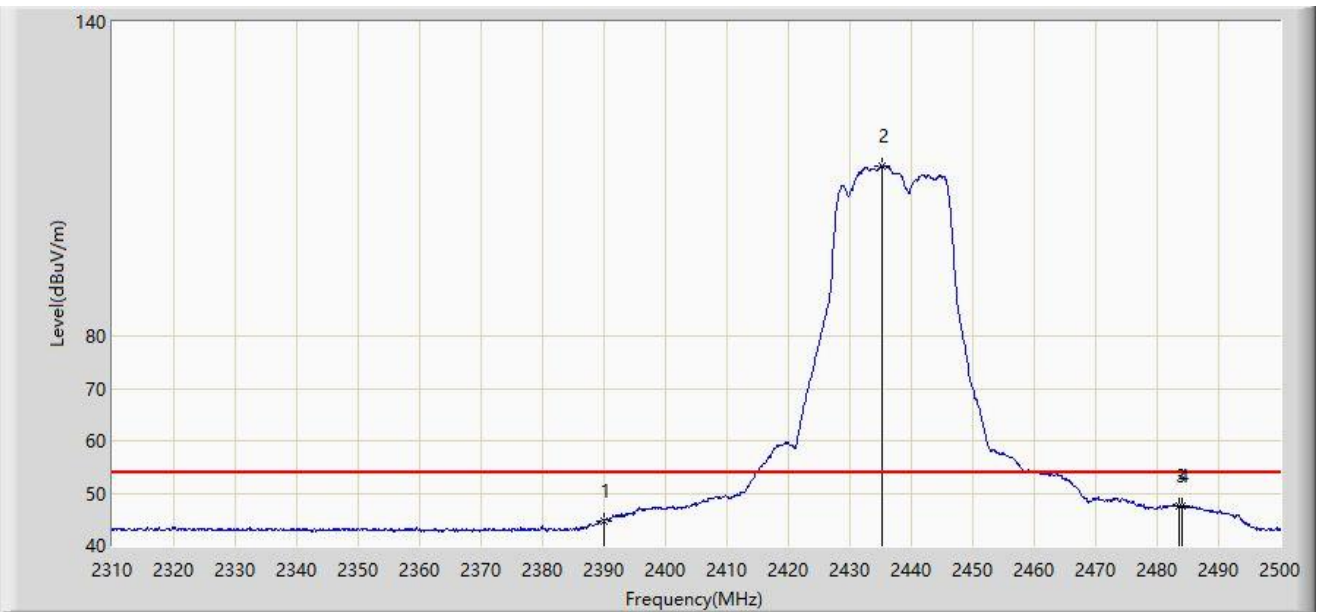

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2390.000	44.716	13.462	-9.284	54.000	31.254	AV
2		2435.305	112.534	81.325	N/A	N/A	31.209	AV
3		2483.500	47.452	16.226	-6.548	54.000	31.226	AV
4	*	2484.135	47.657	16.430	-6.343	54.000	31.227	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

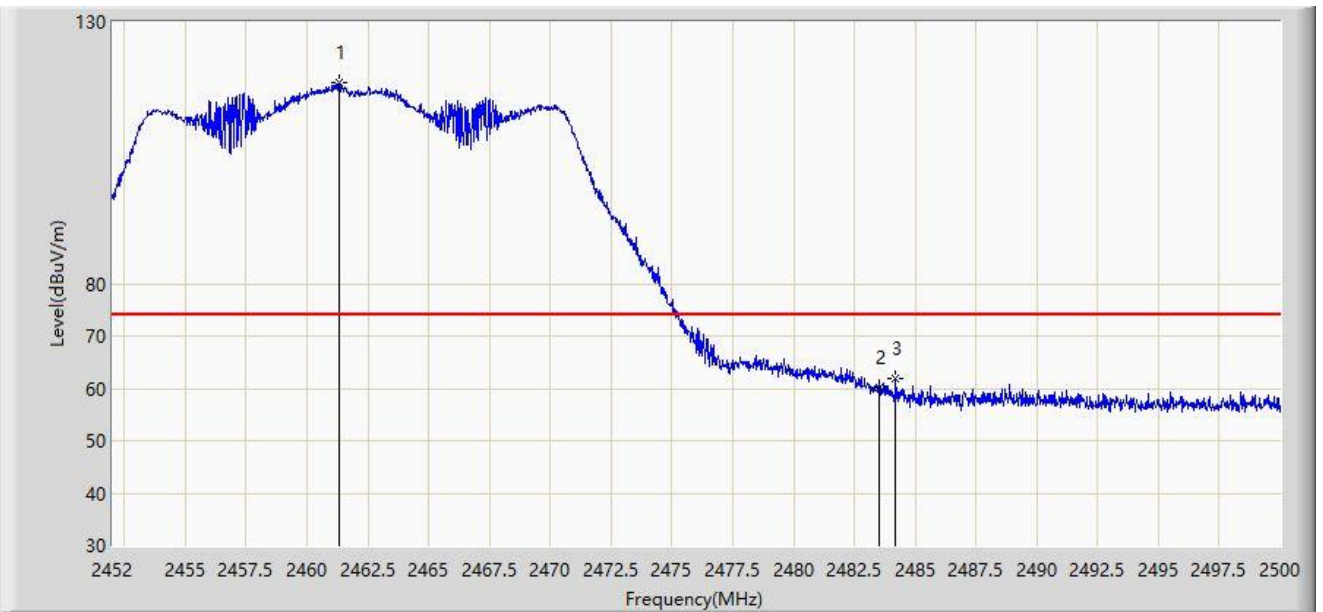


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2461.312	118.490	87.264	N/A	N/A	31.226	PK
2		2483.500	60.039	28.813	-13.961	74.000	31.226	PK
3	*	2484.208	61.944	30.717	-12.056	74.000	31.227	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

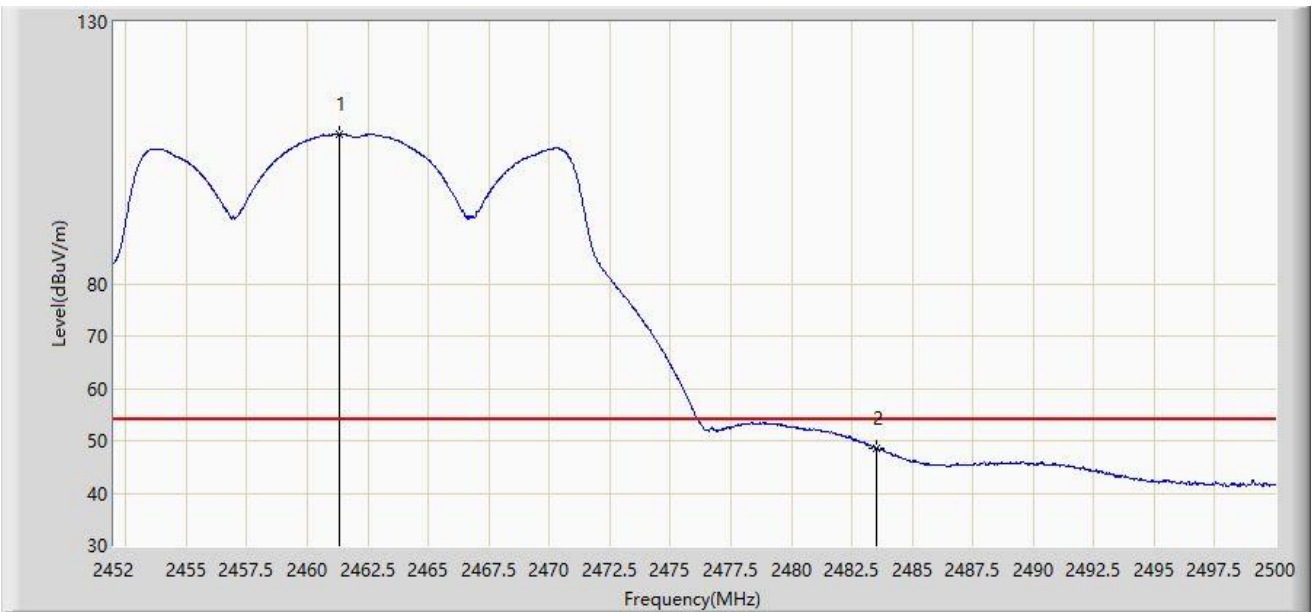


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2461.336	108.626	77.400	N/A	N/A	31.226	AV
2	*	2483.500	48.659	17.433	-5.341	54.000	31.226	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

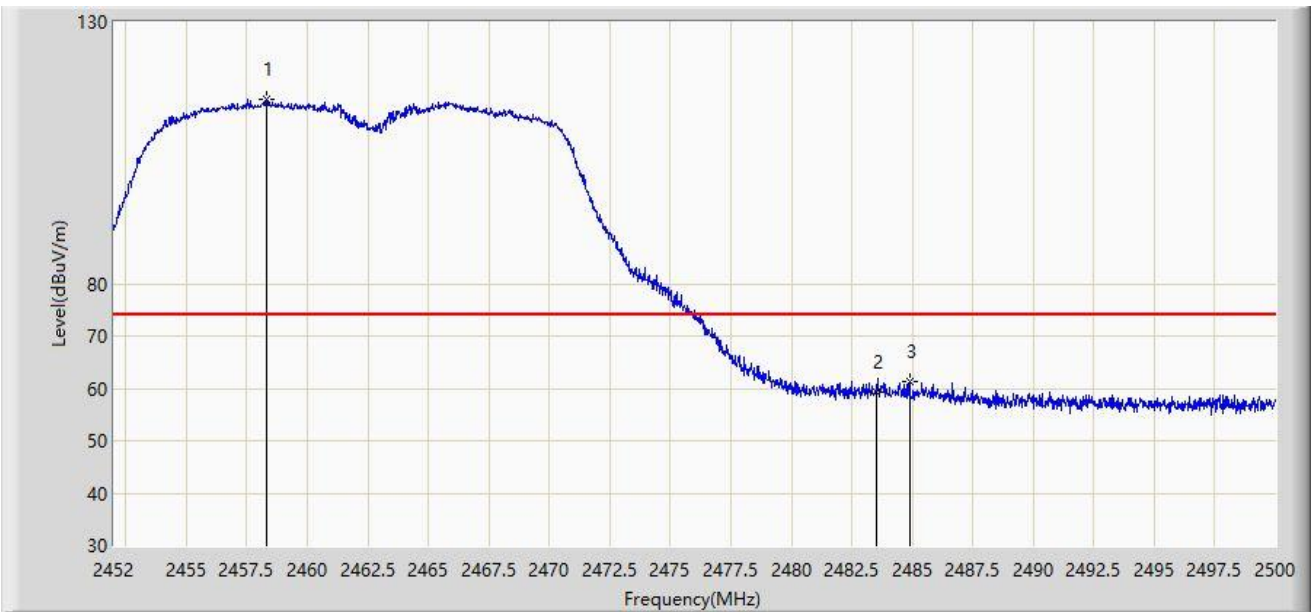


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2458.312	115.299	84.071	N/A	N/A	31.229	PK
2		2483.500	59.345	28.119	-14.655	74.000	31.226	PK
3	*	2484.880	61.440	30.213	-12.560	74.000	31.227	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

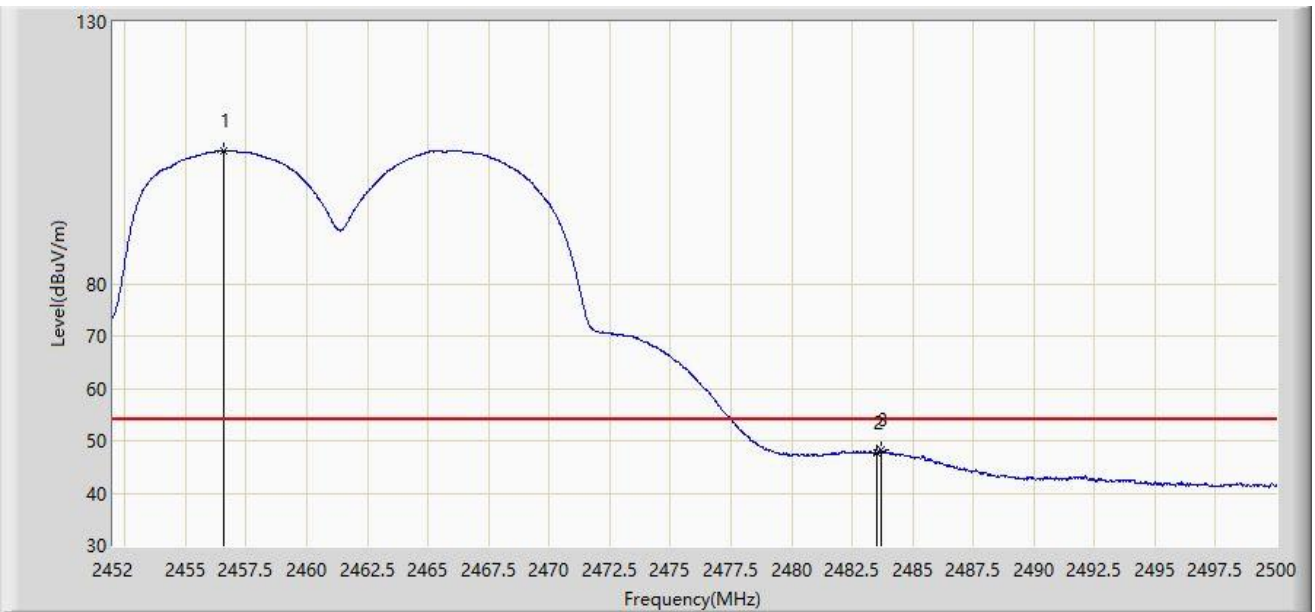


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2456.560	105.362	74.132	N/A	N/A	31.229	AV
2		2483.500	47.778	16.552	-6.222	54.000	31.226	AV
3	*	2483.728	48.186	16.960	-5.814	54.000	31.226	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

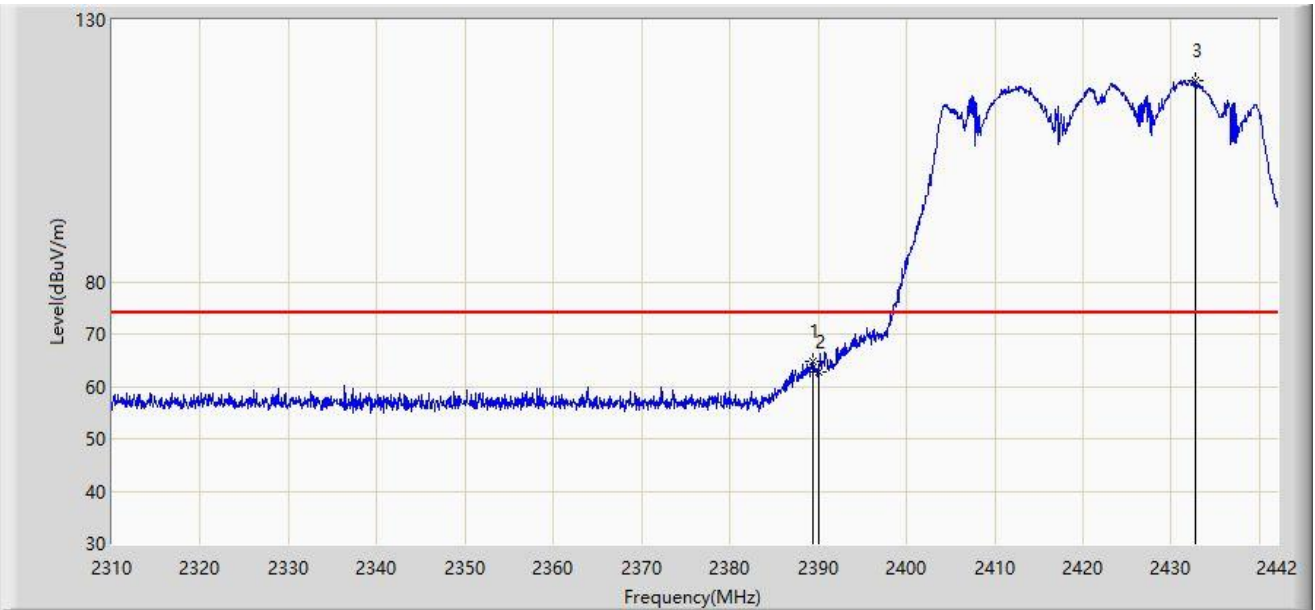


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.332	64.648	33.394	-9.352	74.000	31.254	PK
2		2390.000	62.777	31.523	-11.223	74.000	31.254	PK
3		2432.694	118.440	87.226	N/A	N/A	31.215	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

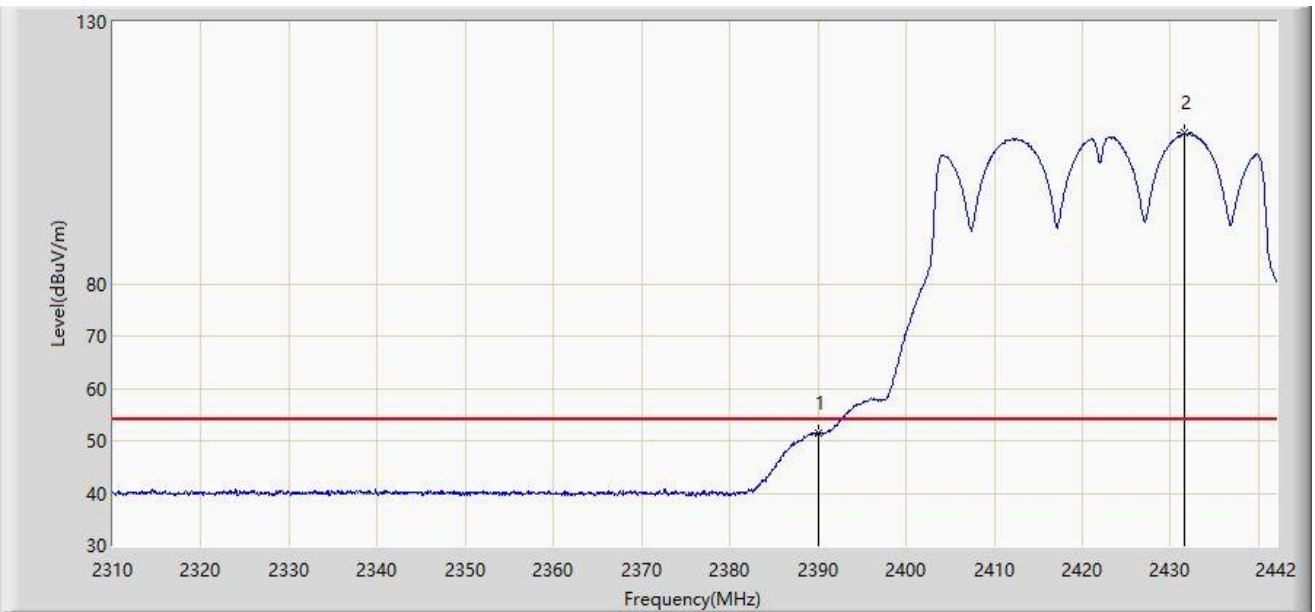


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2390.000	51.468	20.214	-2.532	54.000	31.254	AV
2		2431.638	108.702	77.486	N/A	N/A	31.216	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

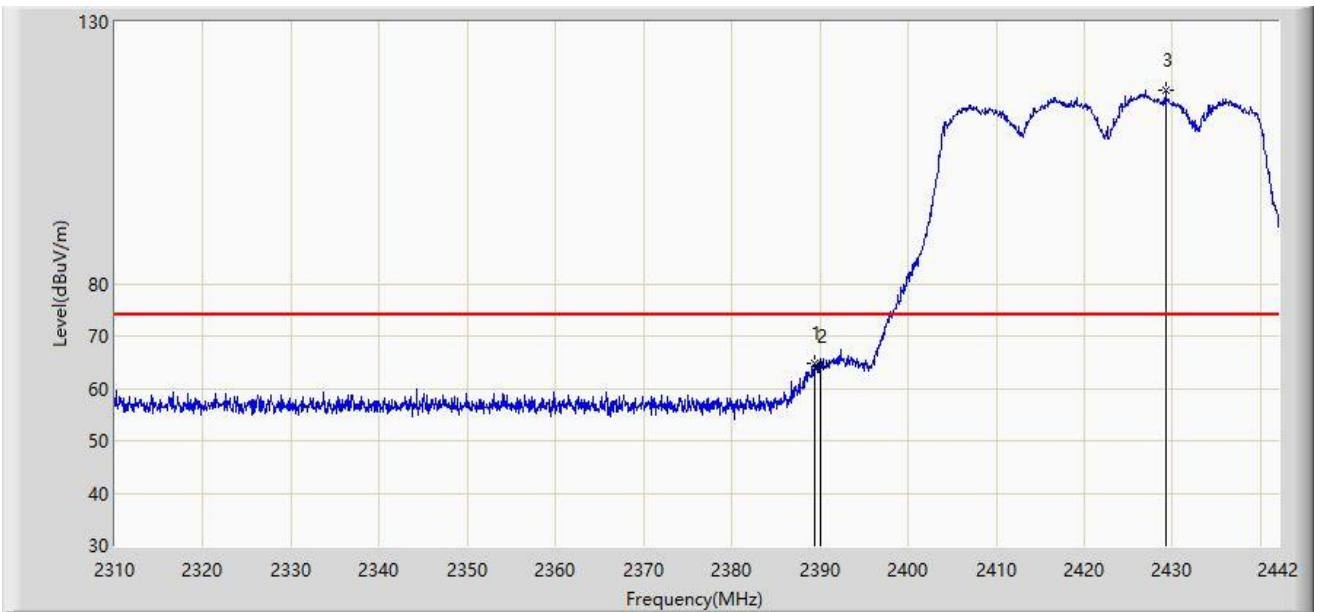


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2389.332	64.641	33.387	-9.359	74.000	31.254	PK
2		2390.000	64.297	33.043	-9.703	74.000	31.254	PK
3		2429.196	116.882	85.661	N/A	N/A	31.221	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

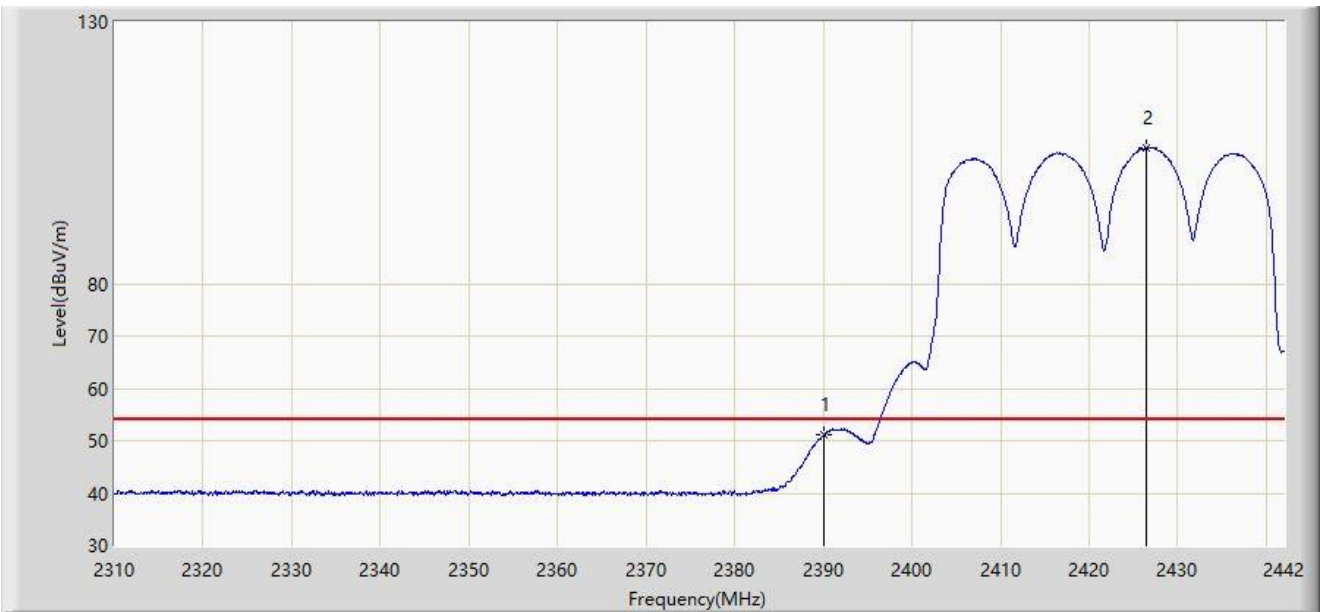

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	51.101	19.847	-2.899	54.000	31.254	AV
2		2426.424	106.033	74.805	N/A	N/A	31.228	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

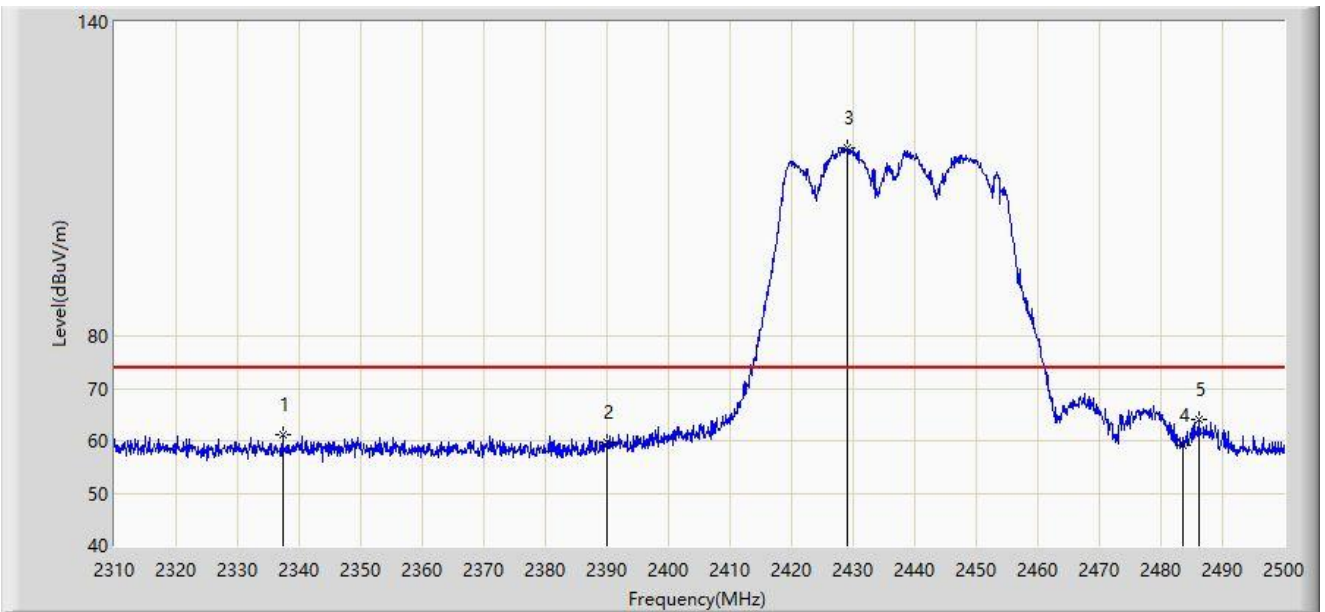


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2337.265	61.043	29.635	-12.957	74.000	31.408	PK
2		2390.000	59.801	28.547	-14.199	74.000	31.254	PK
3		2428.940	115.967	84.745	N/A	N/A	31.222	PK
4		2483.500	59.167	27.941	-14.833	74.000	31.226	PK
5	*	2486.225	63.987	32.759	-10.013	74.000	31.228	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

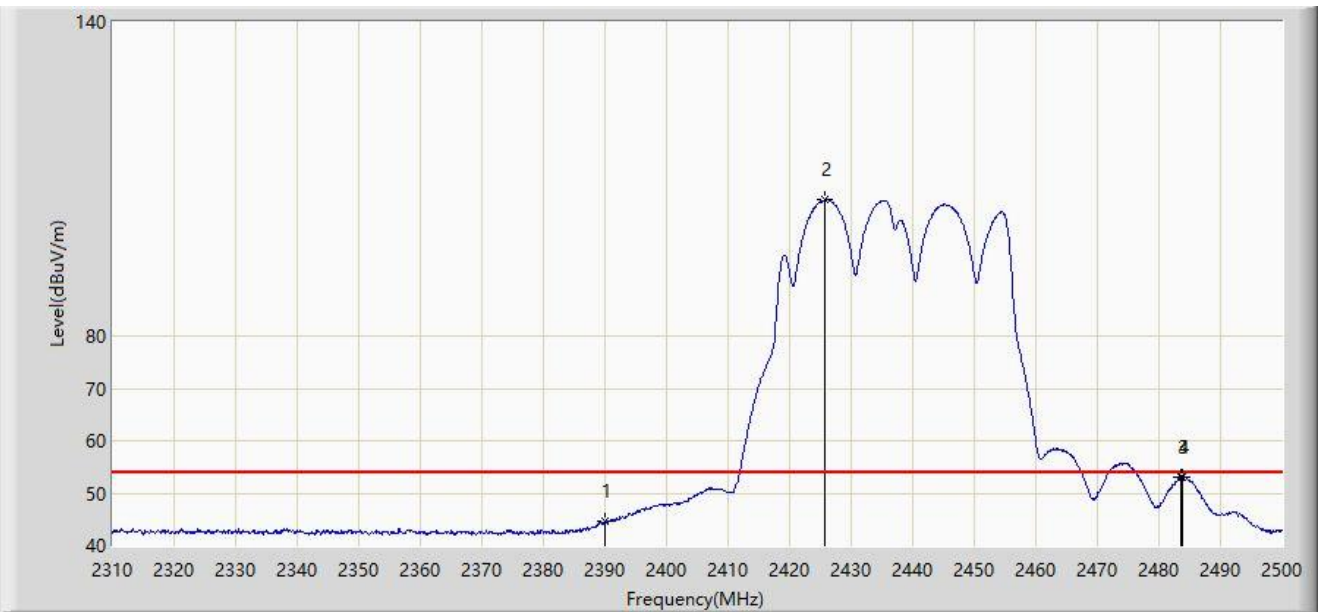


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2390.000	44.617	13.363	-9.383	54.000	31.254	AV
2		2425.710	106.022	74.791	N/A	N/A	31.230	AV
3		2483.500	52.910	21.684	-1.090	54.000	31.226	AV
4	*	2483.850	53.049	21.823	-0.951	54.000	31.226	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

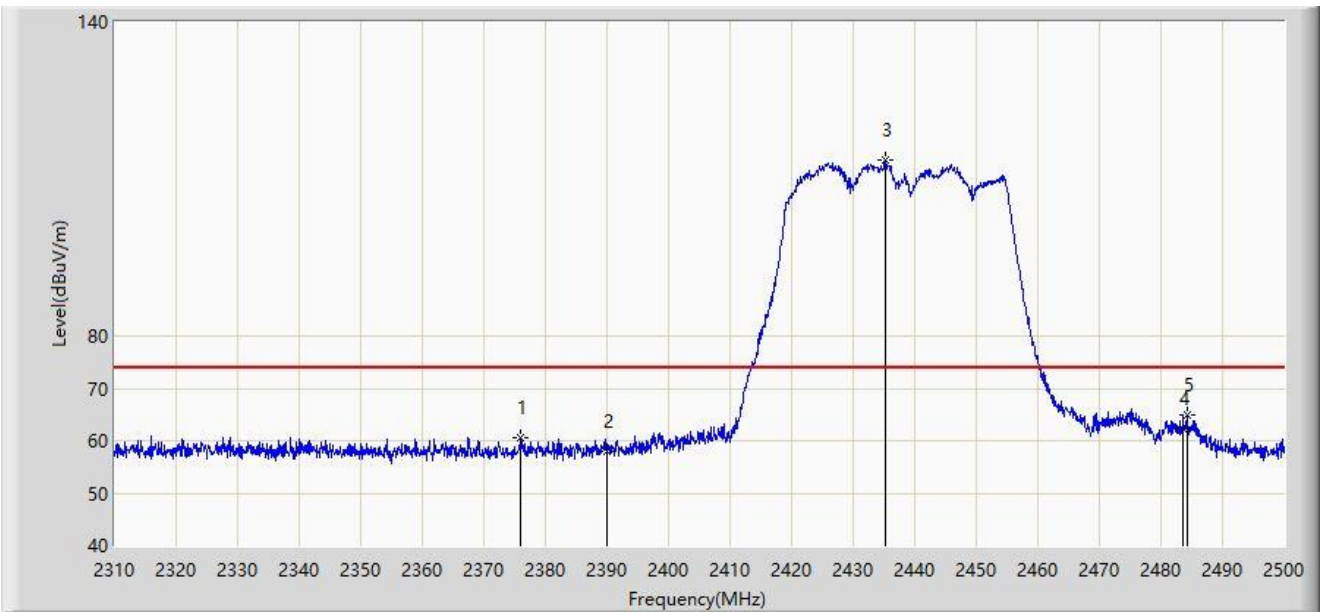


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2375.930	60.501	29.211	-13.499	74.000	31.290	PK
2		2390.000	57.894	26.640	-16.106	74.000	31.254	PK
3		2435.305	113.480	82.271	N/A	N/A	31.209	PK
4		2483.500	62.313	31.087	-11.687	74.000	31.226	PK
5	*	2484.230	64.848	33.621	-9.152	74.000	31.227	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

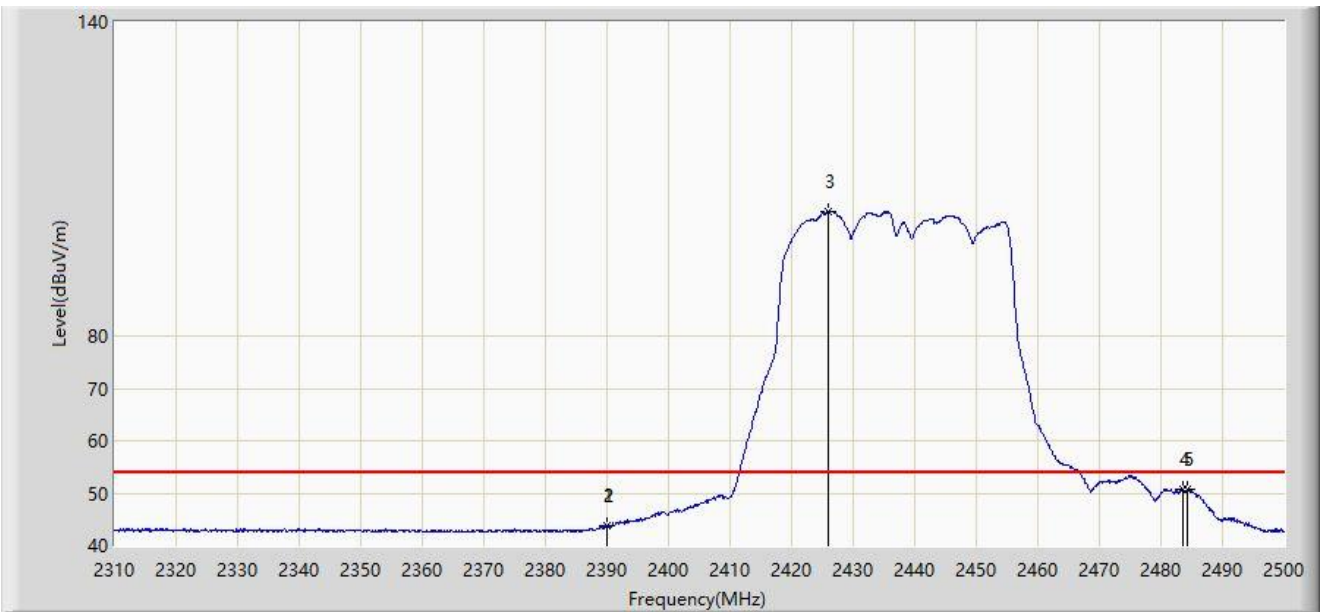


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2389.895	43.912	12.658	-10.088	54.000	31.254	AV
2		2390.000	43.714	12.460	-10.286	54.000	31.254	AV
3		2425.900	103.839	72.609	N/A	N/A	31.230	AV
4	*	2483.500	50.620	19.394	-3.380	54.000	31.226	AV
5		2484.325	50.620	19.393	-3.380	54.000	31.227	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

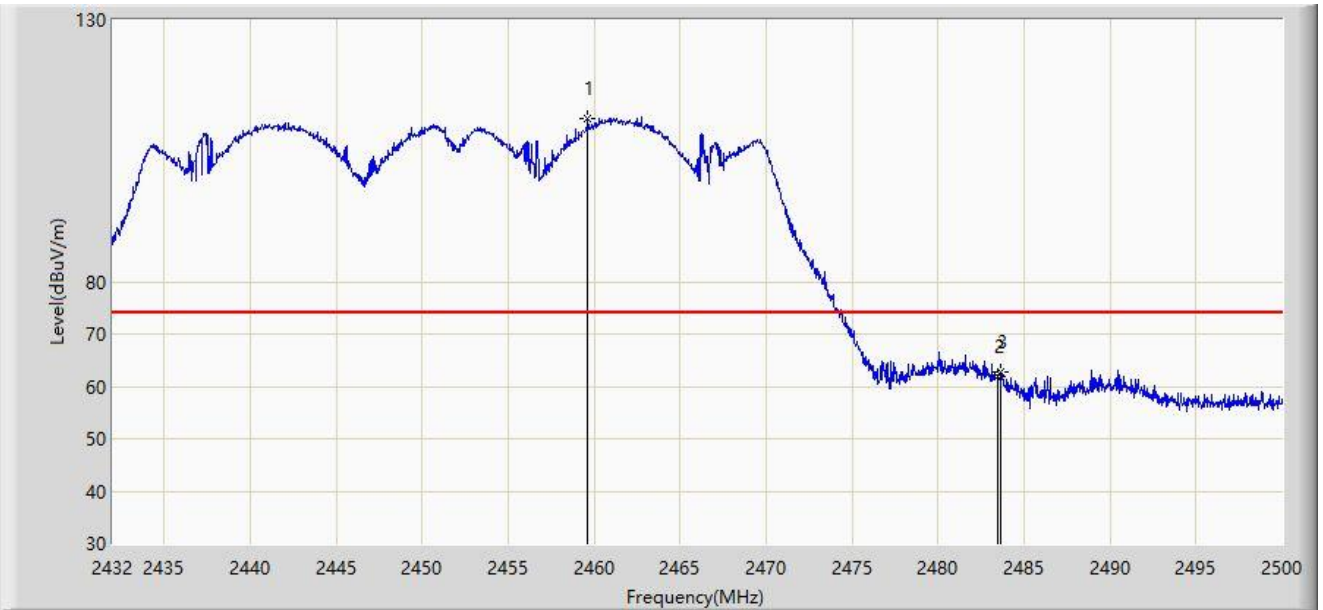


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2459.642	111.283	80.056	N/A	N/A	31.227	PK
2		2483.500	61.800	30.574	-12.200	74.000	31.226	PK
3	*	2483.646	62.722	31.496	-11.278	74.000	31.226	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

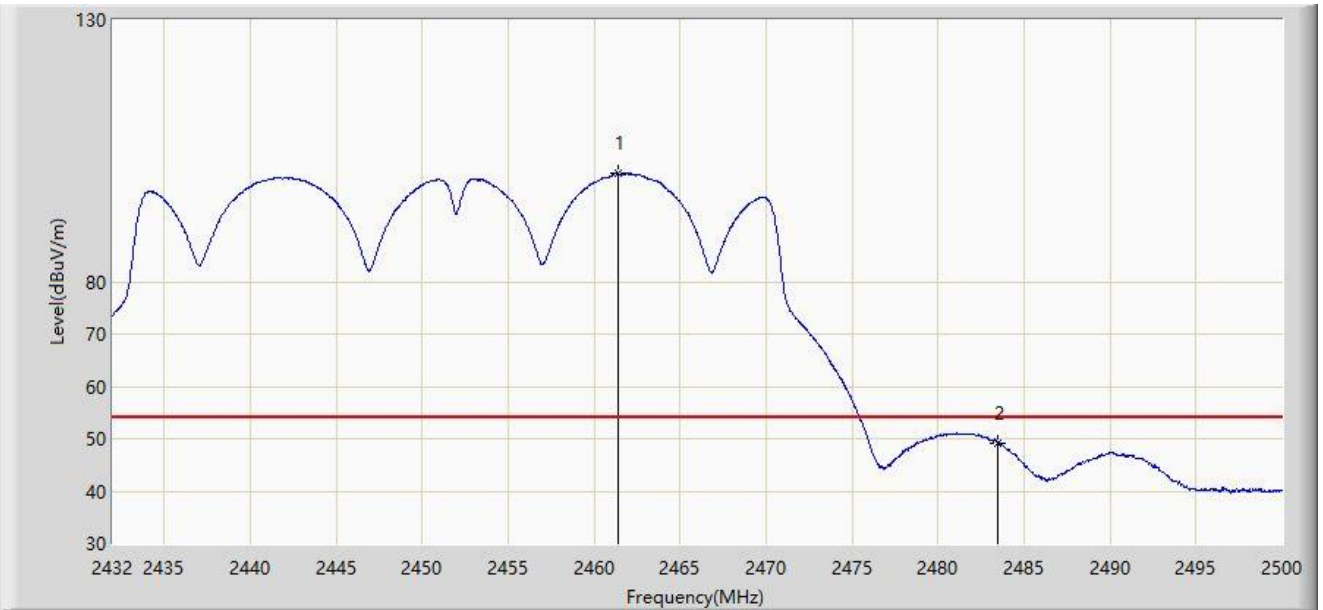


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.376	100.684	69.458	N/A	N/A	31.226	AV
2	*	2483.500	49.263	18.037	-4.737	54.000	31.226	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

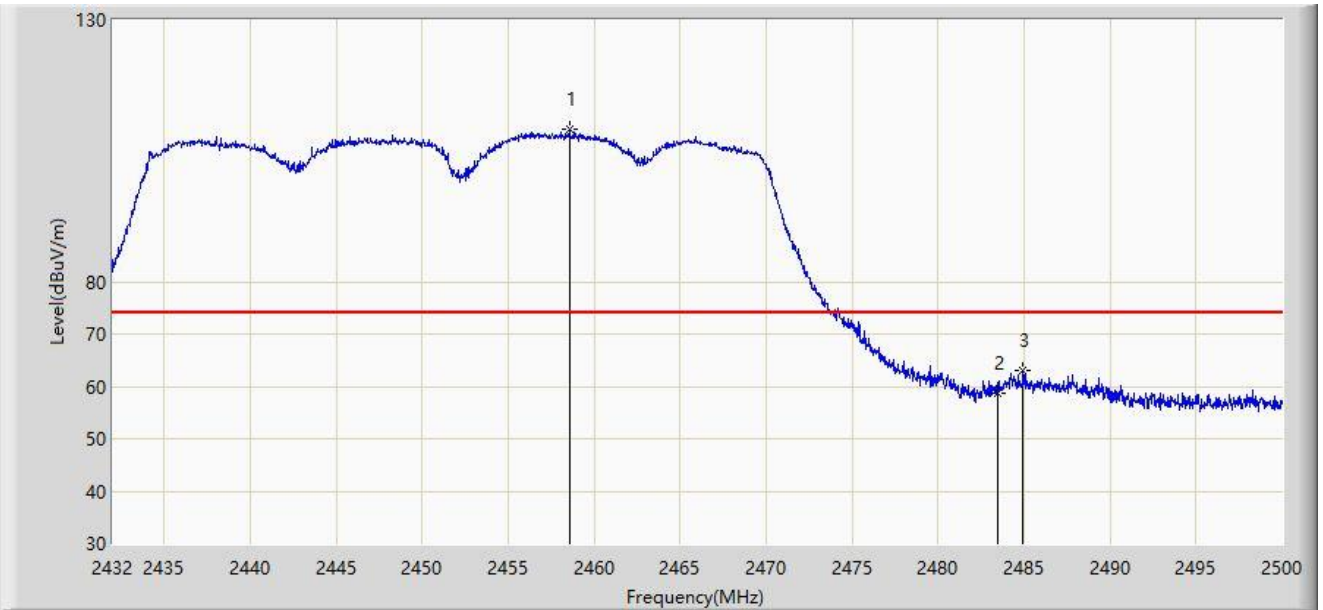


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2458.554	109.157	77.929	N/A	N/A	31.228	PK
2		2483.500	58.561	27.335	-15.439	74.000	31.226	PK
3	*	2484.938	62.908	31.681	-11.092	74.000	31.227	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

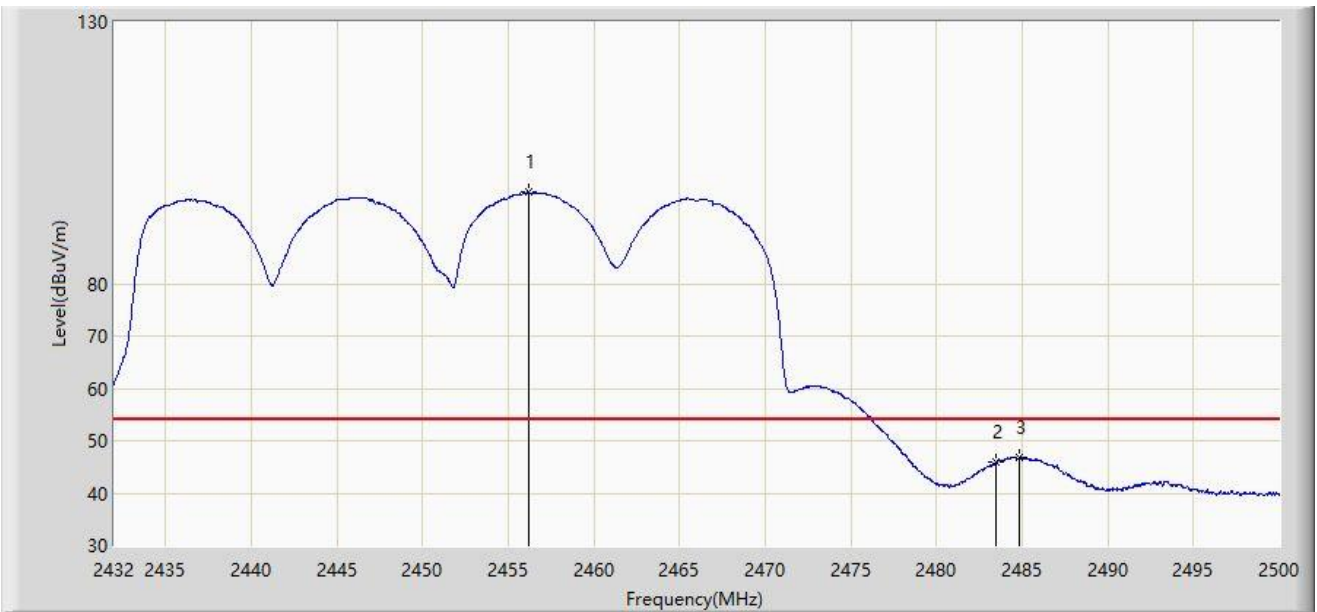

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2456.174	97.470	66.240	N/A	N/A	31.230	AV
2		2483.500	45.853	14.627	-8.147	54.000	31.226	AV
3	*	2484.870	46.902	15.675	-7.098	54.000	31.227	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

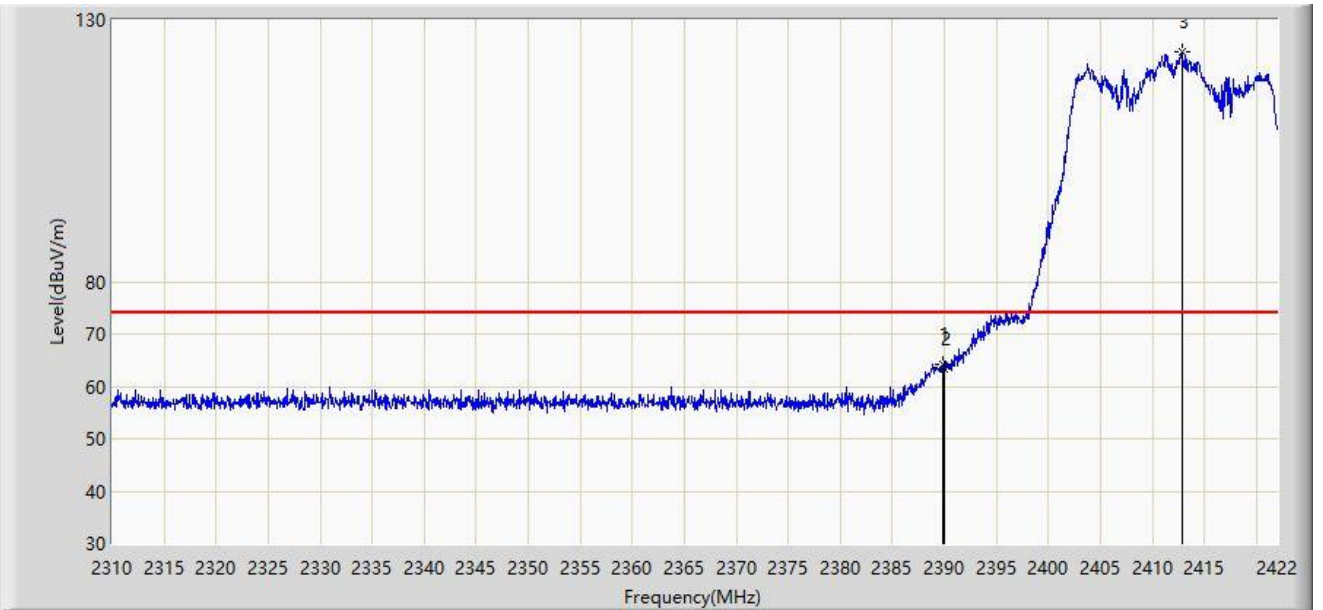


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.800	64.188	32.934	-9.812	74.000	31.254	PK
2		2390.000	63.193	31.939	-10.807	74.000	31.254	PK
3		2412.816	124.046	92.794	N/A	N/A	31.252	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

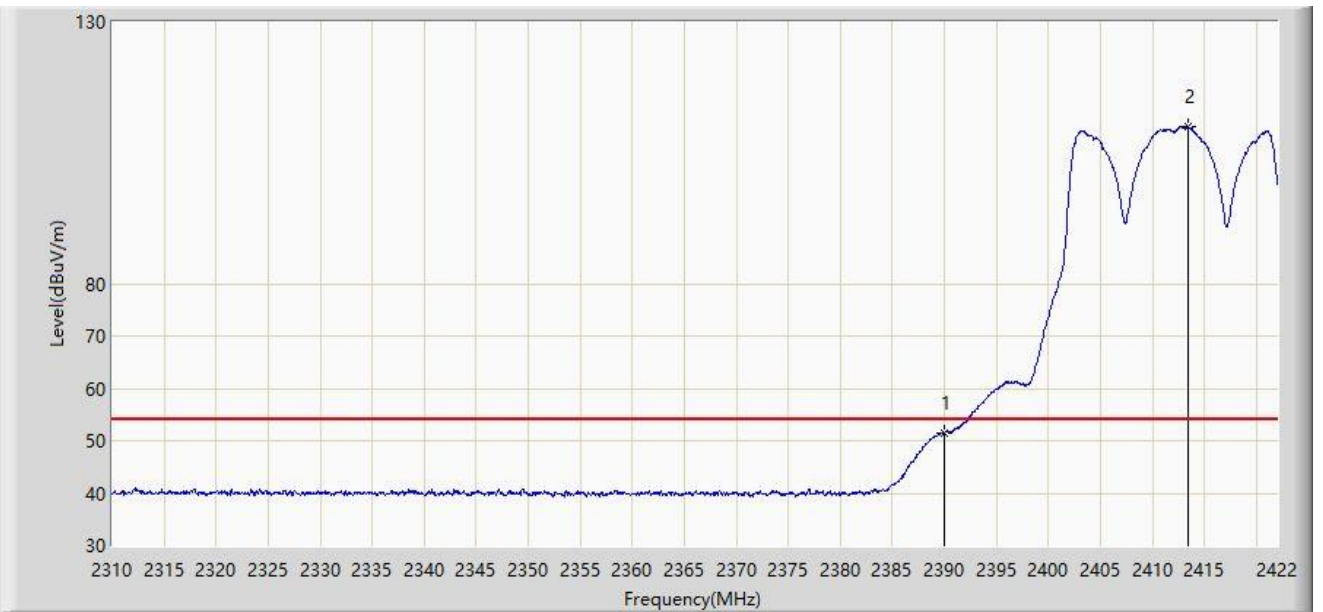


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2390.000	51.578	20.324	-2.422	54.000	31.254	AV
2		2413.376	110.043	78.791	N/A	N/A	31.252	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

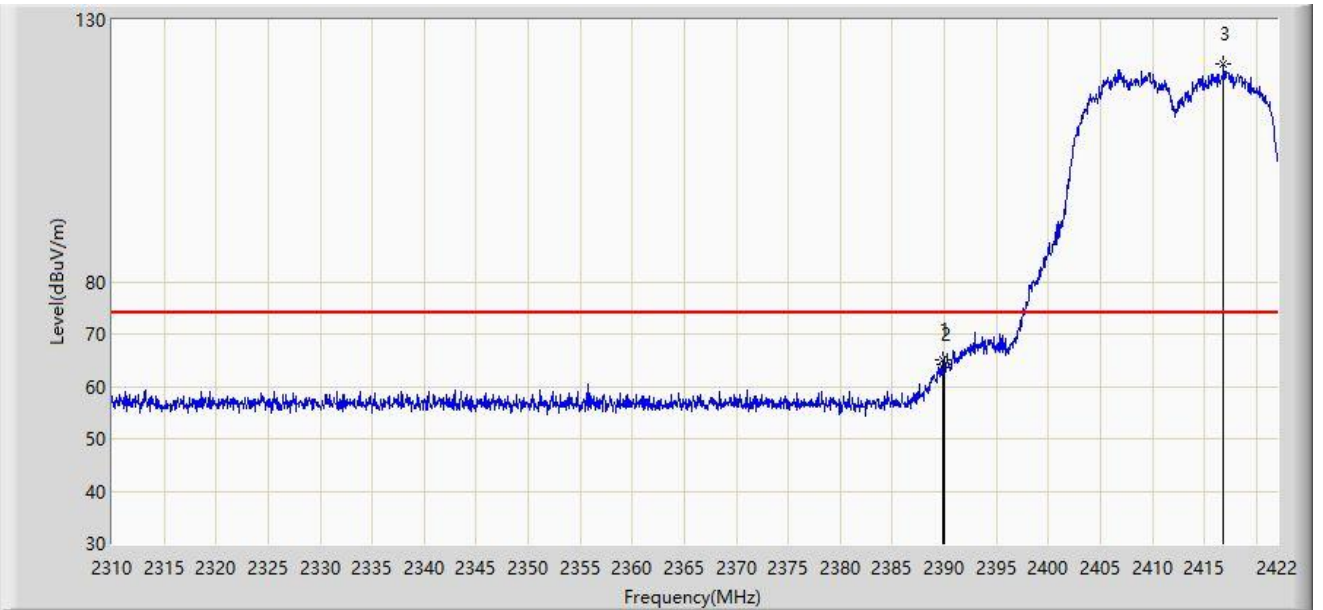


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.912	64.928	33.674	-9.072	74.000	31.254	PK
2		2390.000	64.079	32.825	-9.921	74.000	31.254	PK
3		2416.848	121.528	90.278	N/A	N/A	31.249	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

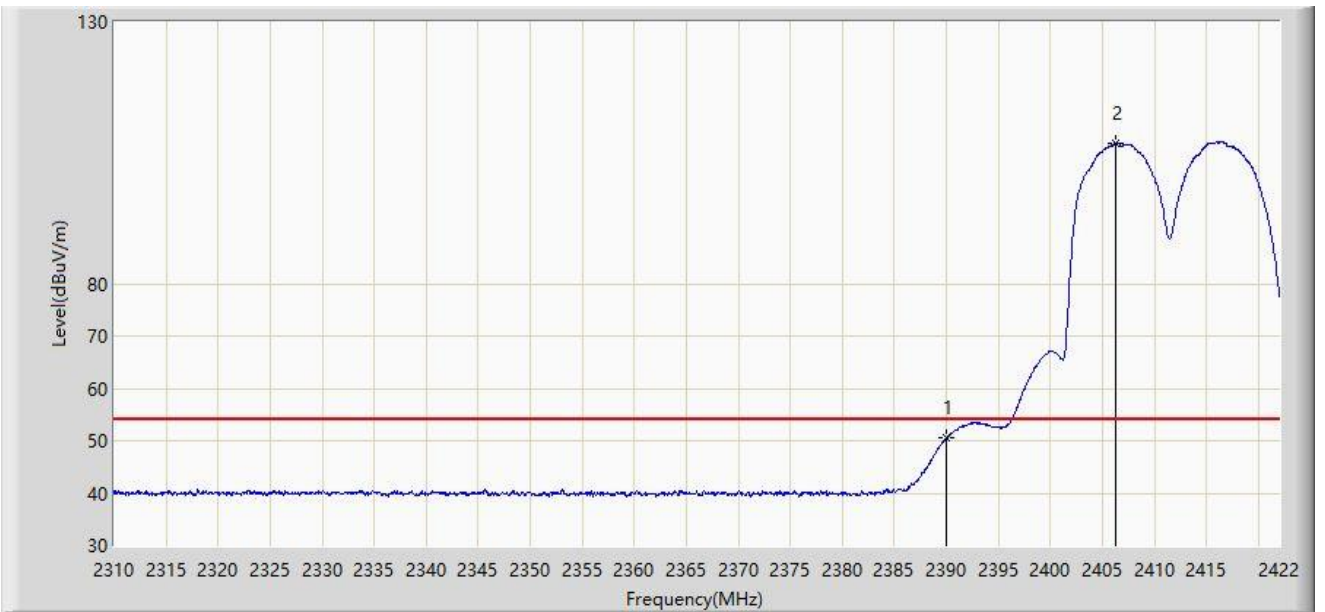


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2390.000	50.475	19.221	-3.525	54.000	31.254	AV
2		2406.320	106.849	75.593	N/A	N/A	31.256	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE20 at 2437MHz	

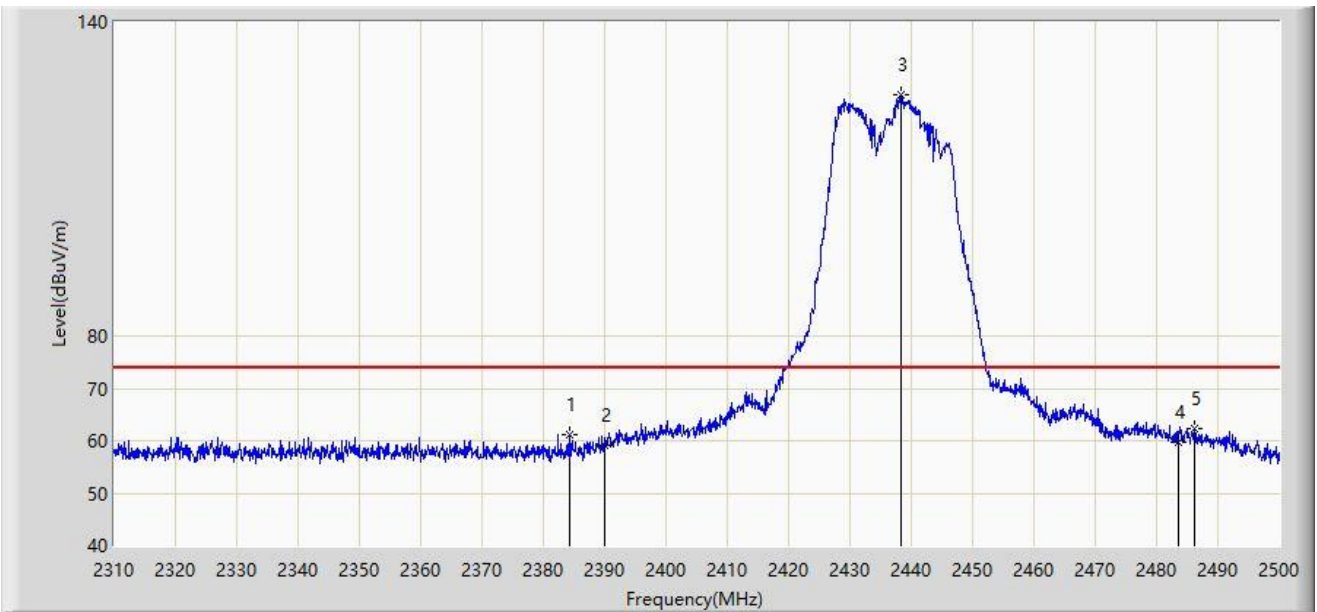


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2384.385	61.295	30.037	-12.705	74.000	31.259	PK
2		2390.000	59.037	27.783	-14.963	74.000	31.254	PK
3		2438.250	126.026	94.822	N/A	N/A	31.204	PK
4		2483.500	59.675	28.449	-14.325	74.000	31.226	PK
5	*	2486.225	62.384	31.156	-11.616	74.000	31.228	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE20 at 2437MHz	

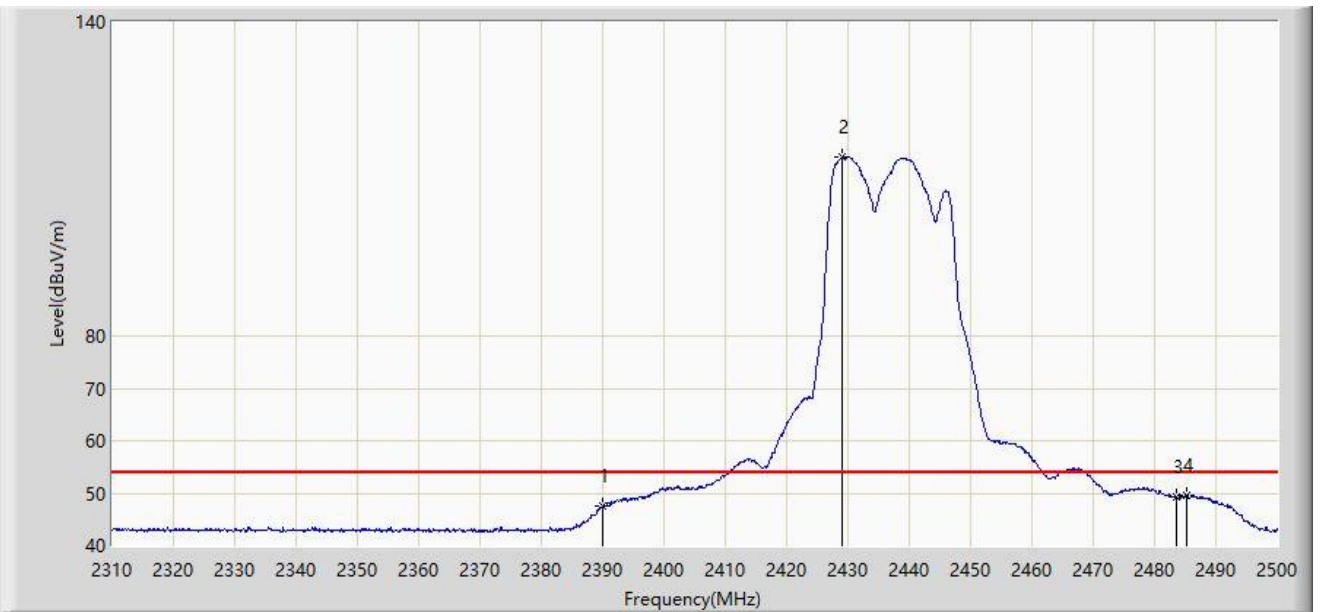


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2390.000	47.426	16.172	-6.574	54.000	31.254	AV
2		2429.130	114.097	82.876	N/A	N/A	31.221	AV
3		2483.500	49.314	18.088	-4.686	54.000	31.226	AV
4	*	2485.275	49.628	18.400	-4.372	54.000	31.228	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE20 at 2437MHz	

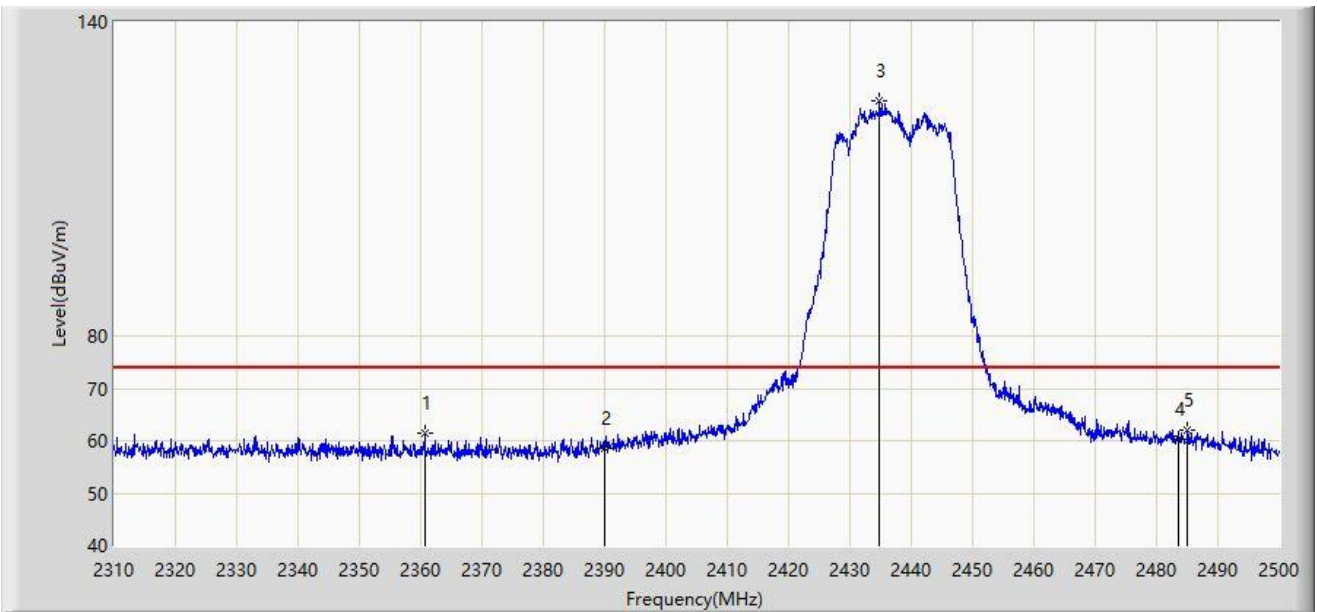


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2360.635	61.464	30.131	-12.536	74.000	31.333	PK
2		2390.000	58.490	27.236	-15.510	74.000	31.254	PK
3		2434.830	124.831	93.621	N/A	N/A	31.209	PK
4		2483.500	60.196	28.970	-13.804	74.000	31.226	PK
5	*	2485.085	62.015	30.788	-11.985	74.000	31.227	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE20 at 2437MHz	

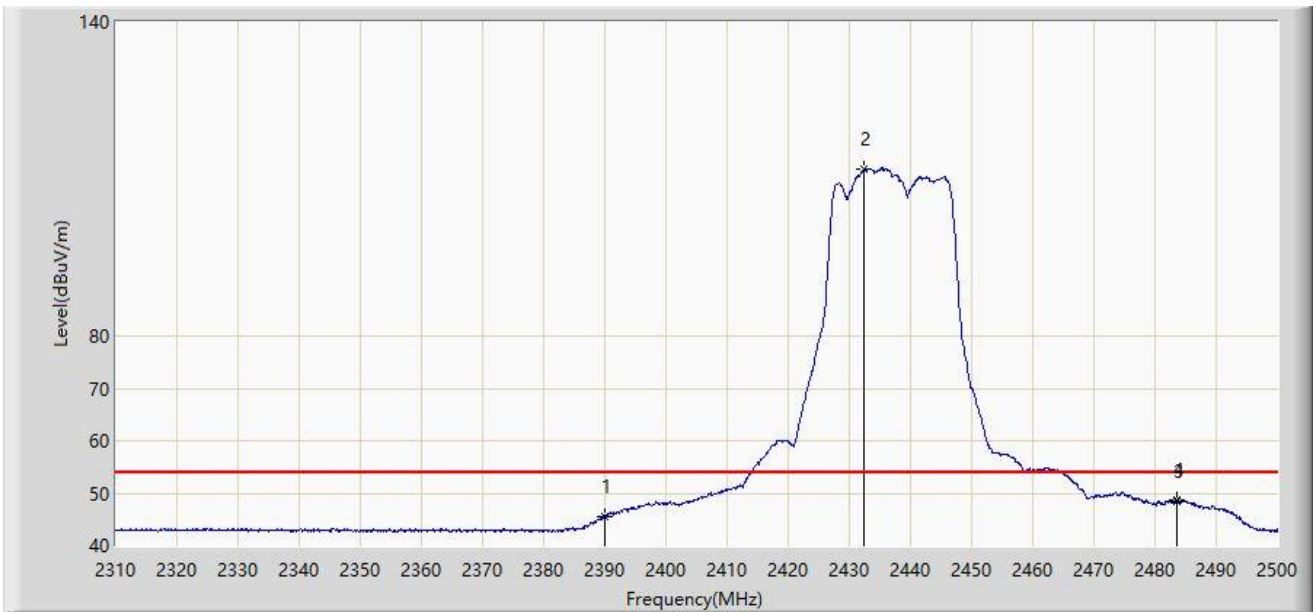

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2390.000	45.469	14.215	-8.531	54.000	31.254	AV
2		2432.455	111.897	80.682	N/A	N/A	31.215	AV
3		2483.500	48.506	17.280	-5.494	54.000	31.226	AV
4	*	2483.660	48.620	17.394	-5.380	54.000	31.226	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	

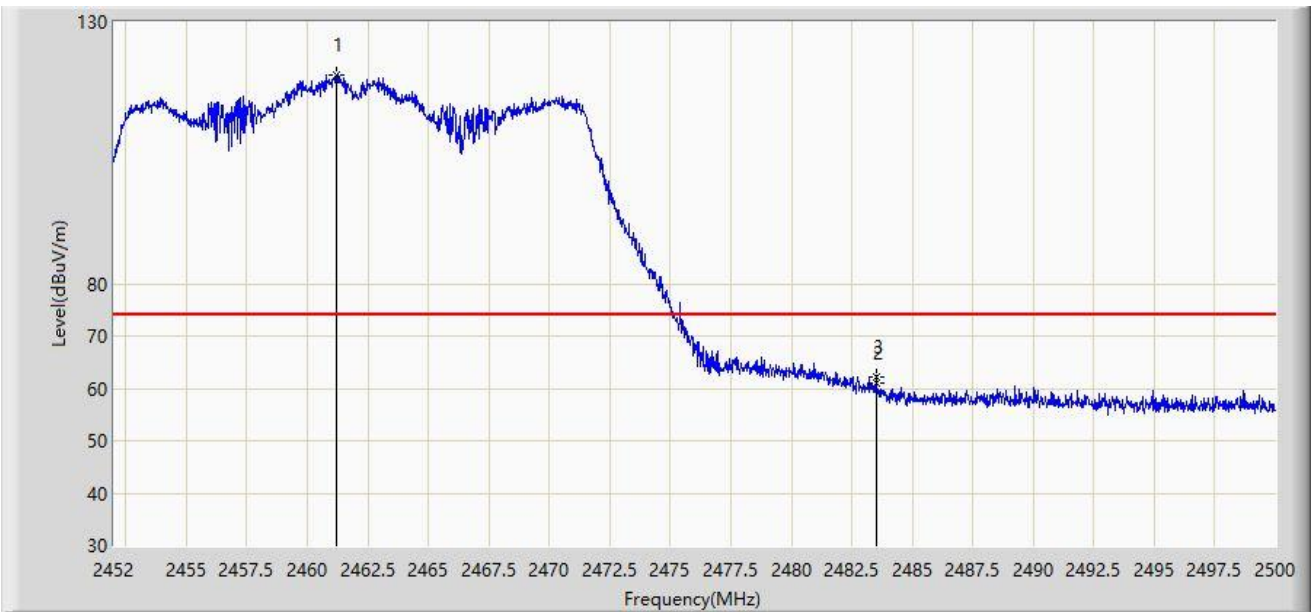


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2461.192	119.948	88.722	N/A	N/A	31.226	PK
2		2483.500	60.877	29.651	-13.123	74.000	31.226	PK
3	*	2483.512	62.250	31.024	-11.750	74.000	31.226	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	

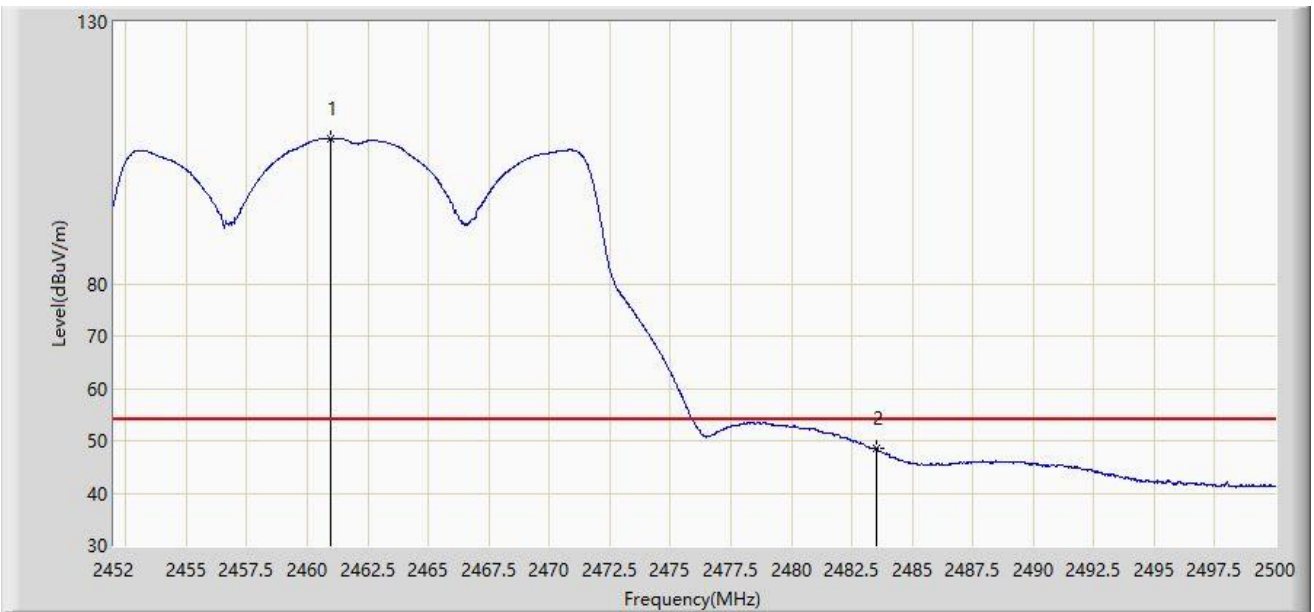


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2460.976	107.812	76.586	N/A	N/A	31.226	AV
2	*	2483.500	48.594	17.368	-5.406	54.000	31.226	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	

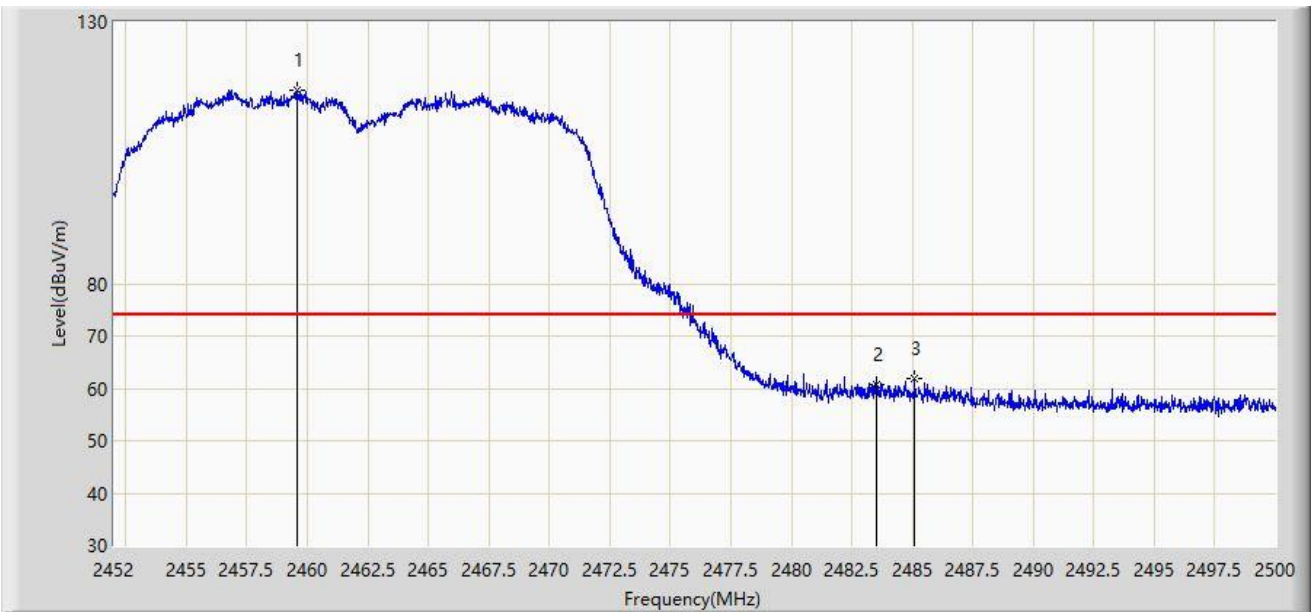

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2459.560	117.093	85.866	N/A	N/A	31.227	PK
2		2483.500	60.760	29.534	-13.240	74.000	31.226	PK
3	*	2485.096	61.872	30.645	-12.128	74.000	31.227	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	




No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2458.792	105.021	73.793	N/A	N/A	31.228	AV
2		2483.500	47.699	16.473	-6.301	54.000	31.226	AV
3	*	2483.920	47.938	16.711	-6.062	54.000	31.227	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

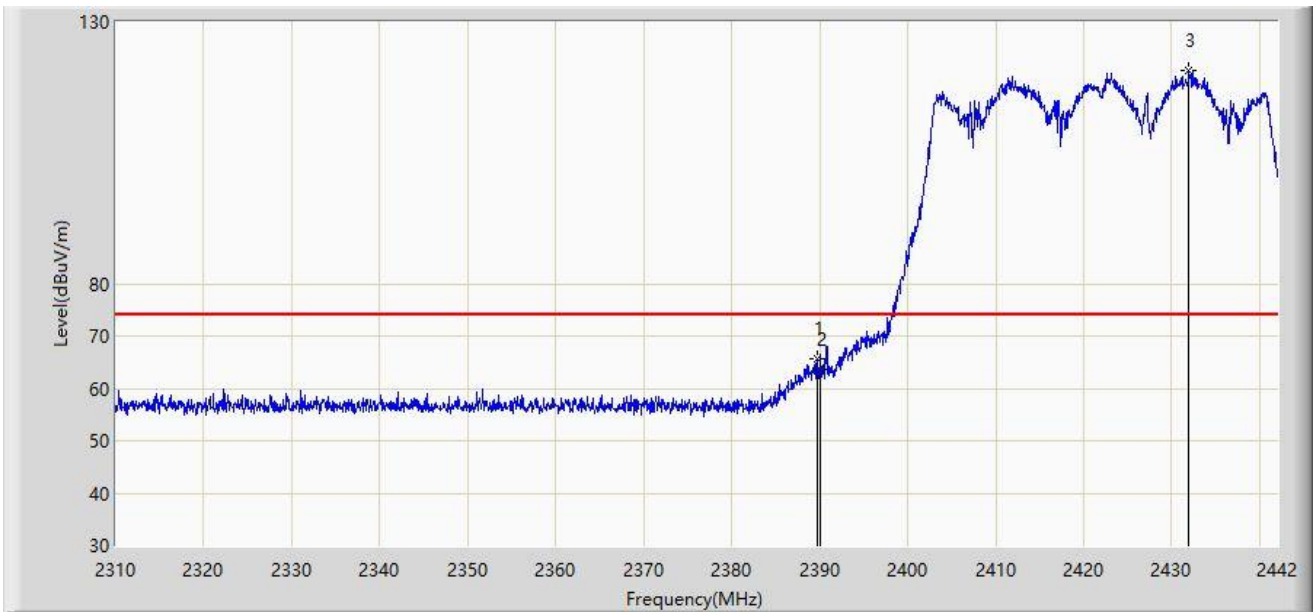


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.794	65.780	34.526	-8.220	74.000	31.253	PK
2		2390.000	63.667	32.413	-10.333	74.000	31.254	PK
3		2431.968	120.738	89.522	N/A	N/A	31.216	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

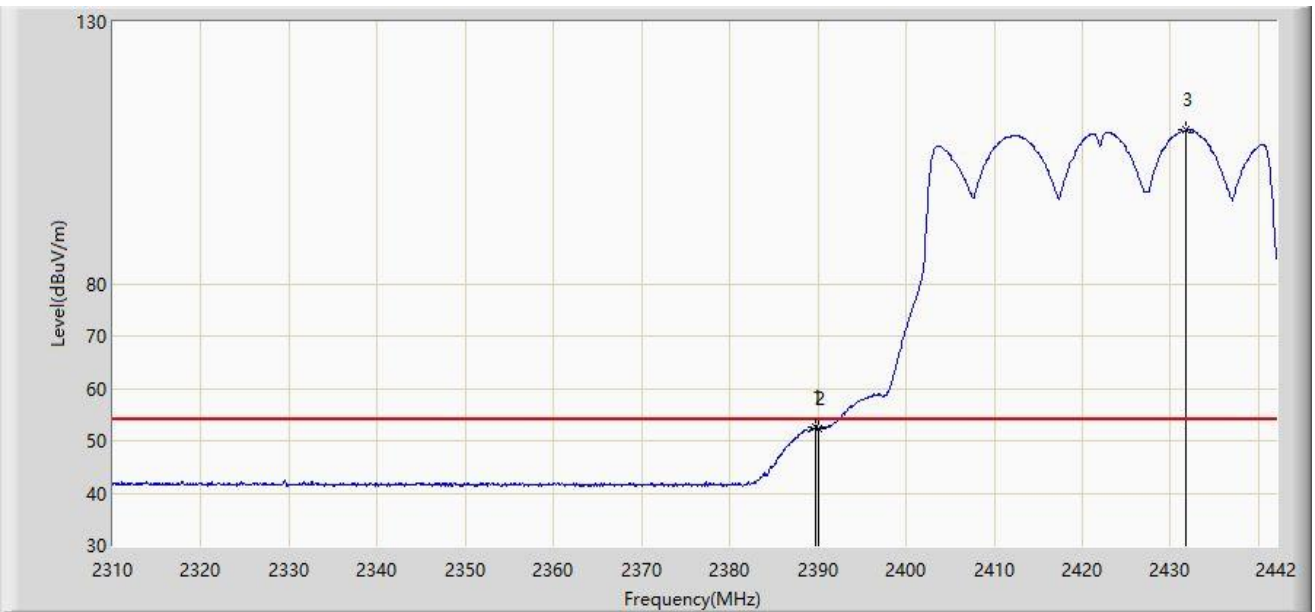


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.728	52.550	21.296	-1.450	54.000	31.254	AV
2		2390.000	52.302	21.048	-1.698	54.000	31.254	AV
3		2431.770	109.362	78.146	N/A	N/A	31.216	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

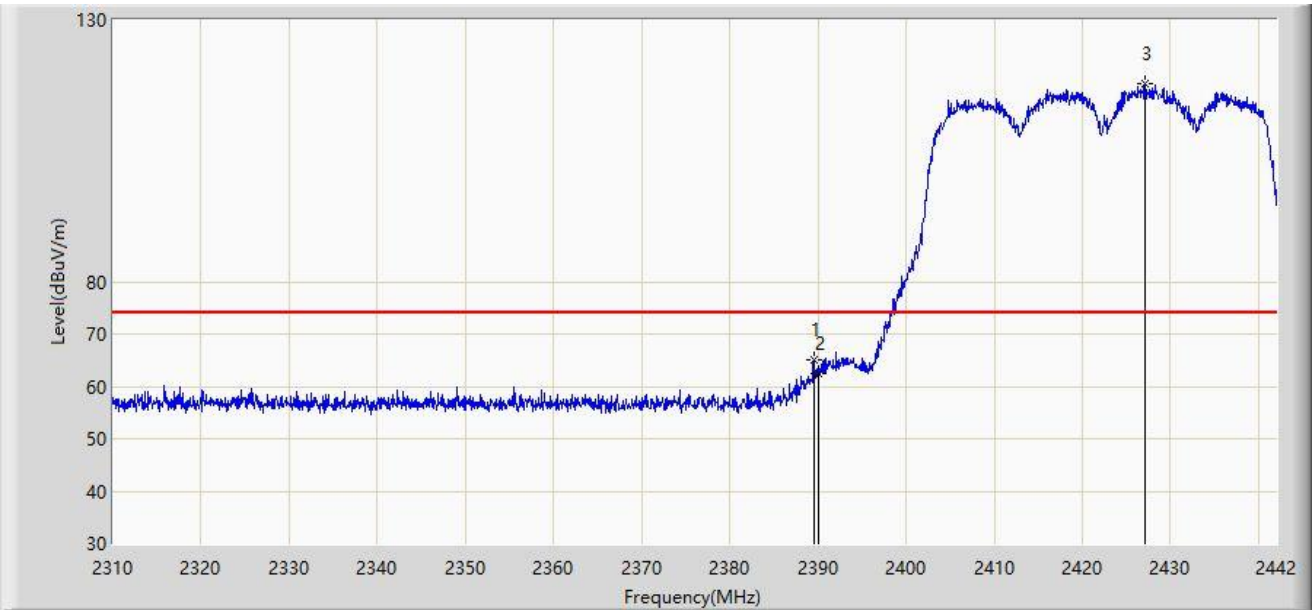


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.530	65.130	33.876	-8.870	74.000	31.254	PK
2		2390.000	62.505	31.251	-11.495	74.000	31.254	PK
3		2427.084	117.777	86.551	N/A	N/A	31.226	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

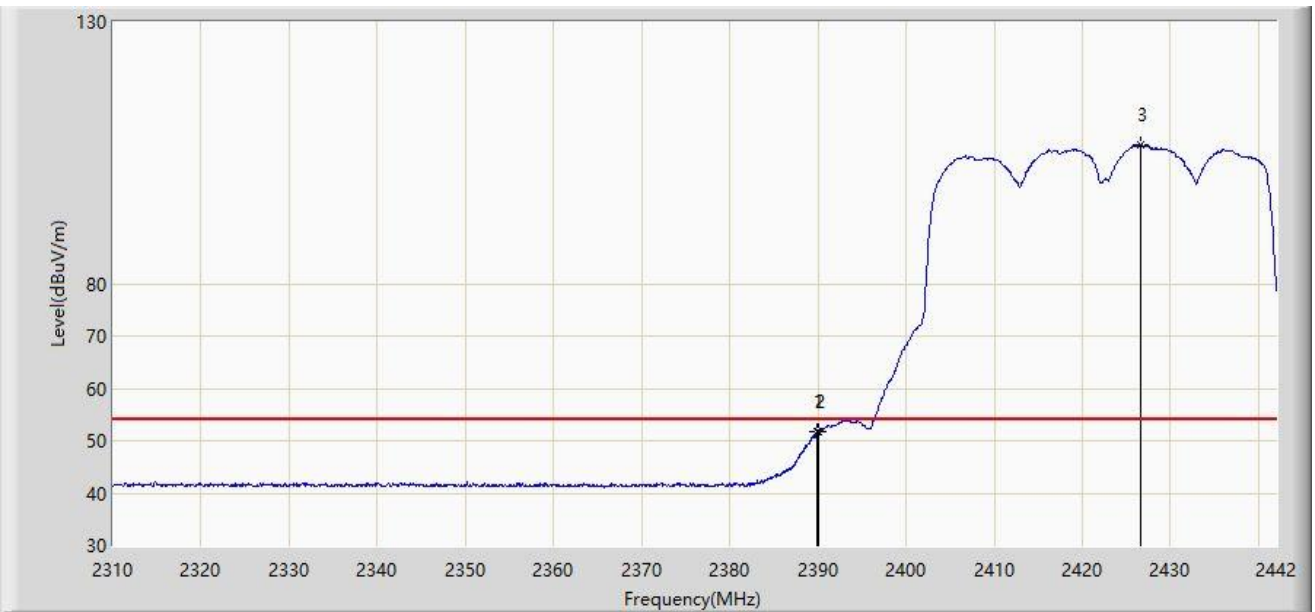

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.926	51.729	20.475	-2.271	54.000	31.254	AV
2		2390.000	51.665	20.411	-2.335	54.000	31.254	AV
3		2426.556	106.646	75.418	N/A	N/A	31.228	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE40 at 2437MHz	

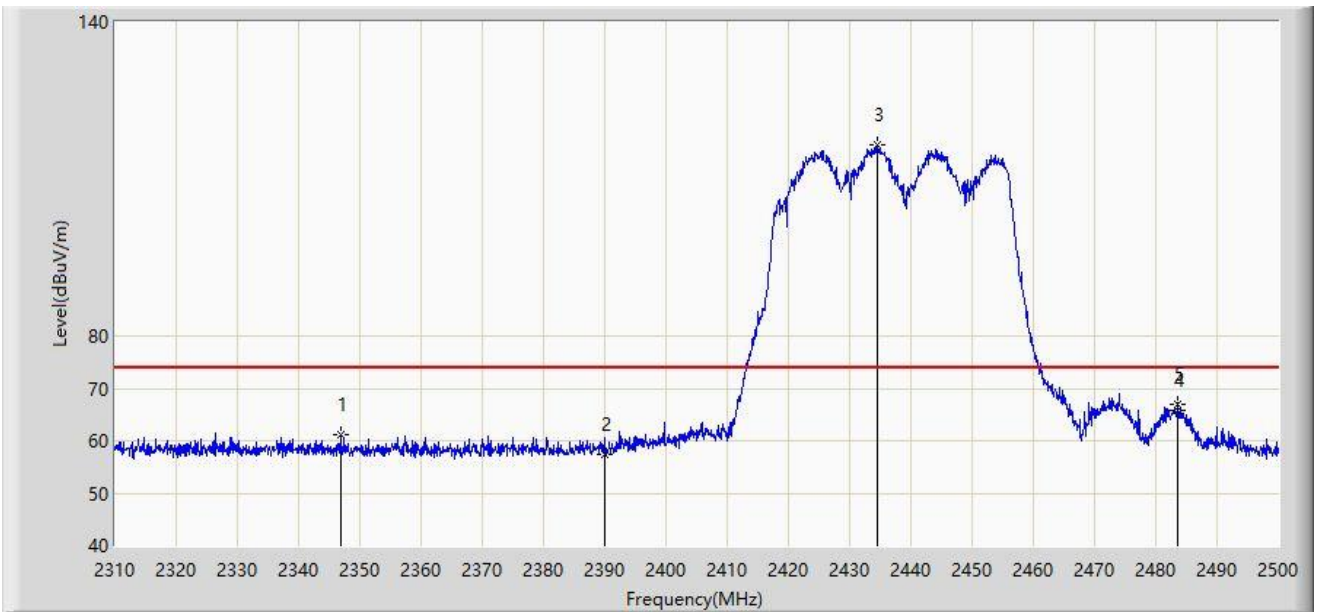


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2346.860	61.038	29.660	-12.962	74.000	31.379	PK
2		2390.000	57.429	26.175	-16.571	74.000	31.254	PK
3		2434.640	116.585	85.375	N/A	N/A	31.210	PK
4		2483.500	65.664	34.438	-8.336	74.000	31.226	PK
5	*	2483.565	66.953	35.727	-7.047	74.000	31.226	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE40 at 2437MHz	

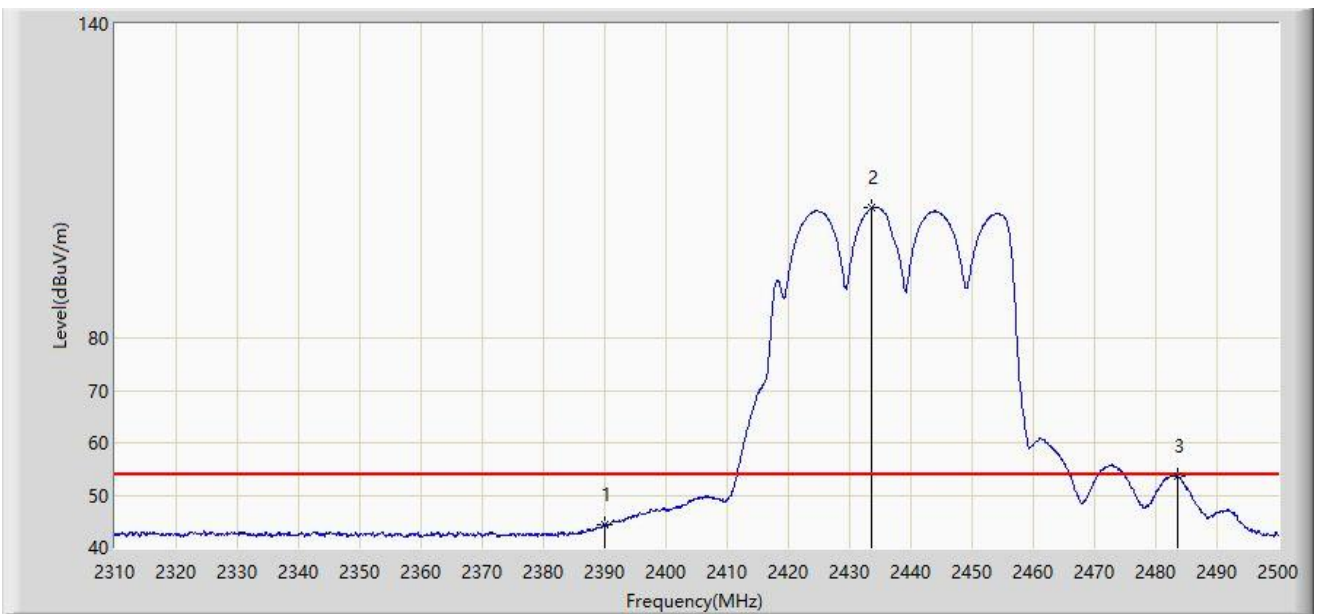


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2390.000	44.266	13.012	-9.734	54.000	31.254	AV
2		2433.690	104.783	73.571	N/A	N/A	31.212	AV
3	*	2483.500	53.508	22.282	-0.492	54.000	31.226	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE40 at 2437MHz	

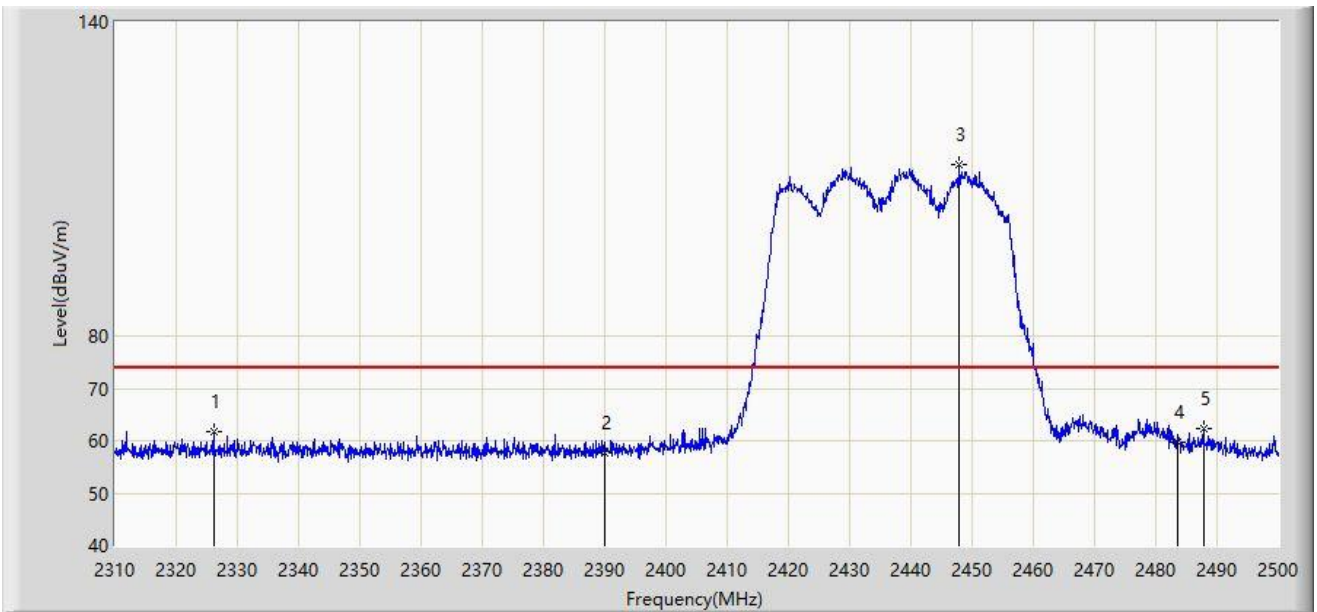


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2326.150	61.750	30.311	-12.250	74.000	31.439	PK
2		2390.000	57.596	26.342	-16.404	74.000	31.254	PK
3		2447.940	112.662	81.442	N/A	N/A	31.220	PK
4		2483.500	59.807	28.581	-14.193	74.000	31.226	PK
5	*	2487.745	62.342	31.113	-11.658	74.000	31.229	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE40 at 2437MHz	

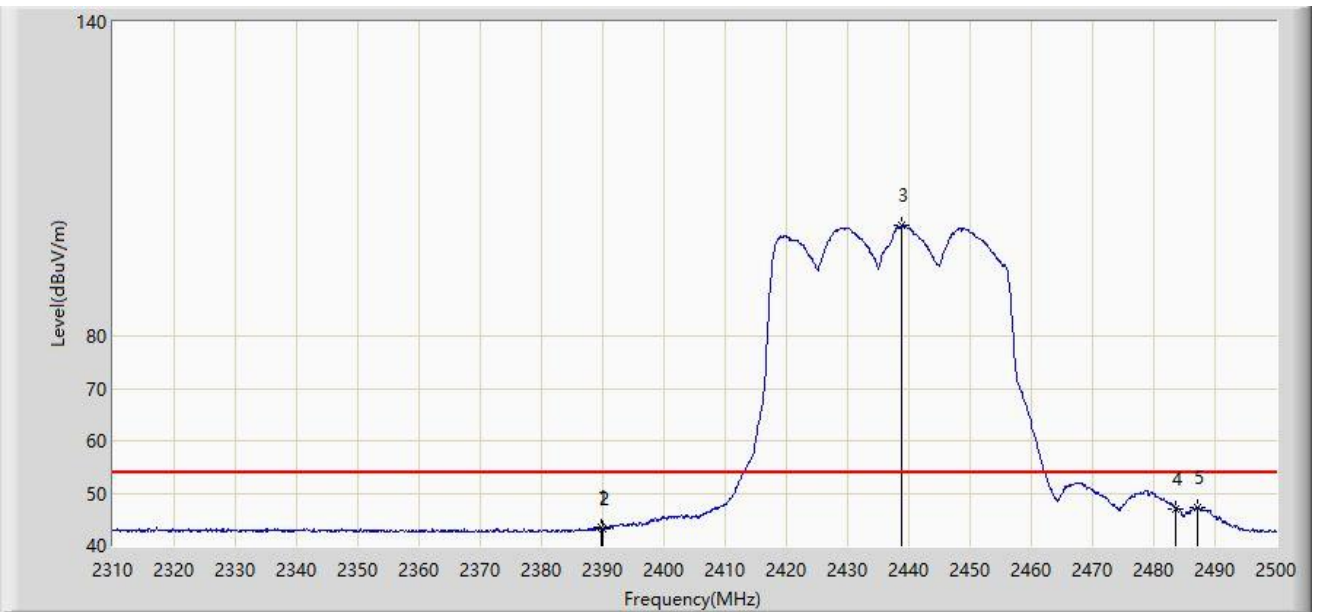


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2389.705	43.620	12.366	-10.380	54.000	31.254	AV
2		2390.000	43.132	11.878	-10.868	54.000	31.254	AV
3		2438.820	101.035	69.830	N/A	N/A	31.205	AV
4		2483.500	47.098	15.872	-6.902	54.000	31.226	AV
5	*	2487.080	47.240	16.011	-6.760	54.000	31.229	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 2447MHz	

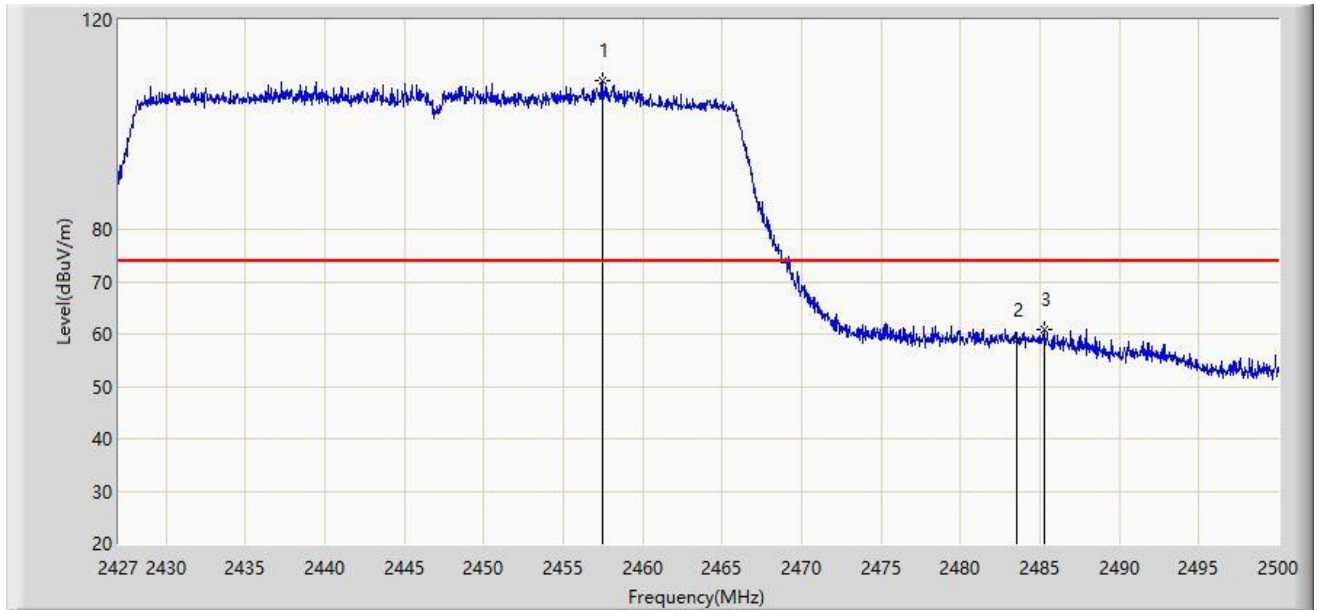


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2457.441	108.473	76.782	N/A	N/A	31.691	PK
2		2483.500	58.968	27.271	-15.032	74.000	31.696	PK
3	*	2485.254	60.941	29.245	-13.059	74.000	31.696	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11ax-HE40 at 2447MHz	

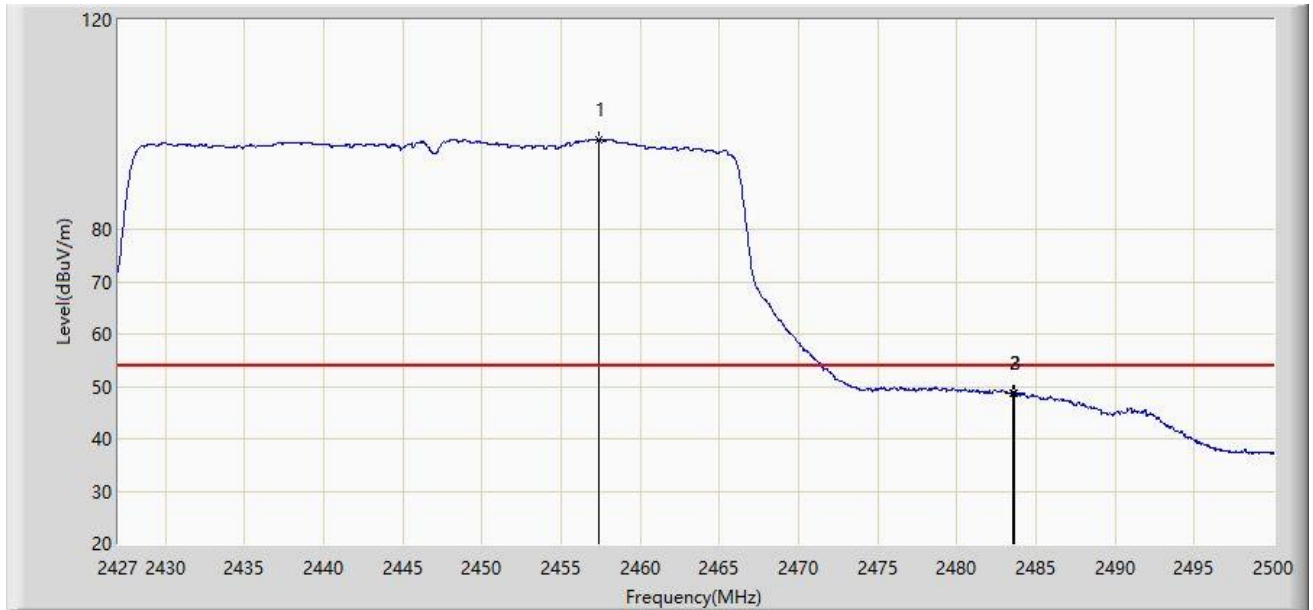


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		2457.368	97.186	65.495	N/A	N/A	31.691	AV
2		2483.500	48.628	16.931	-5.372	54.000	31.696	AV
3	*	2483.648	48.765	17.068	-5.235	54.000	31.697	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

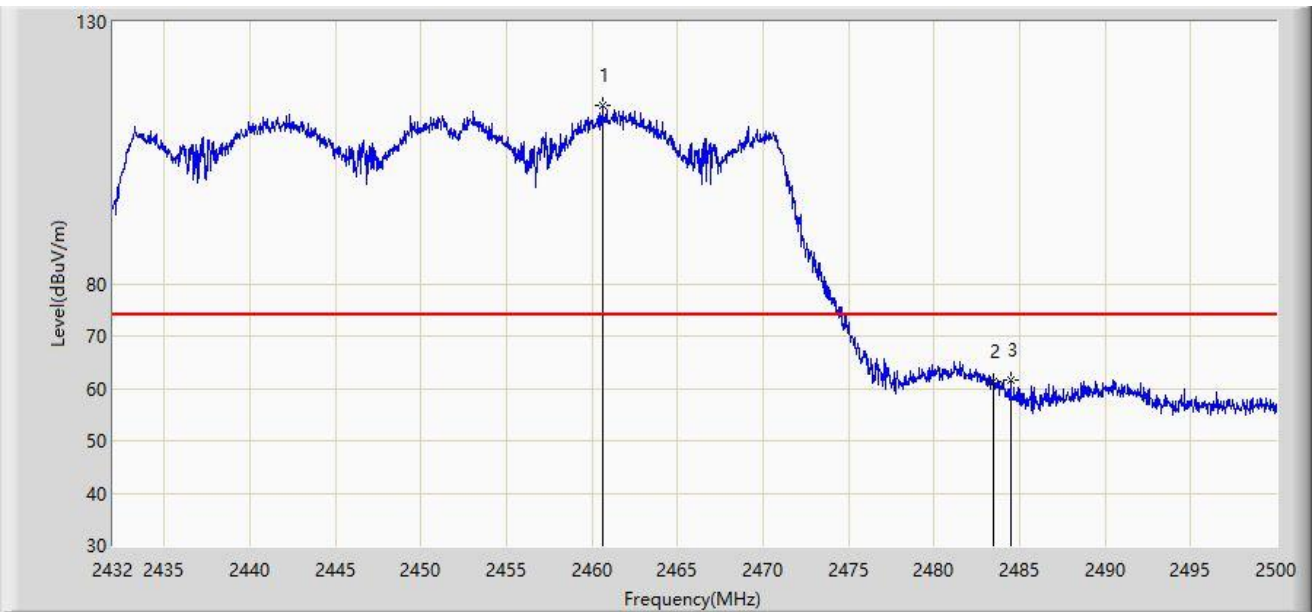


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2460.594	114.184	82.958	N/A	N/A	31.226	PK
2		2483.500	61.214	29.988	-12.786	74.000	31.226	PK
3	*	2484.462	61.534	30.307	-12.466	74.000	31.227	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

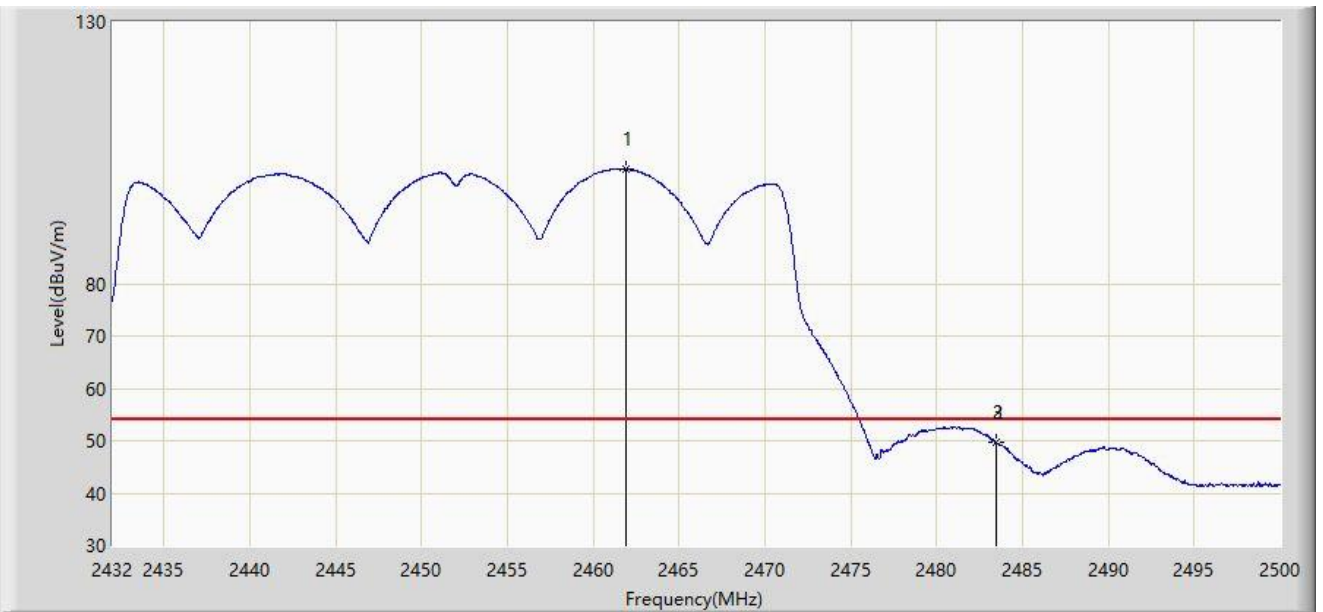

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.920	101.896	70.671	N/A	N/A	31.225	AV
2		2483.500	49.609	18.383	-4.391	54.000	31.226	AV
3	*	2483.510	49.628	18.402	-4.372	54.000	31.226	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

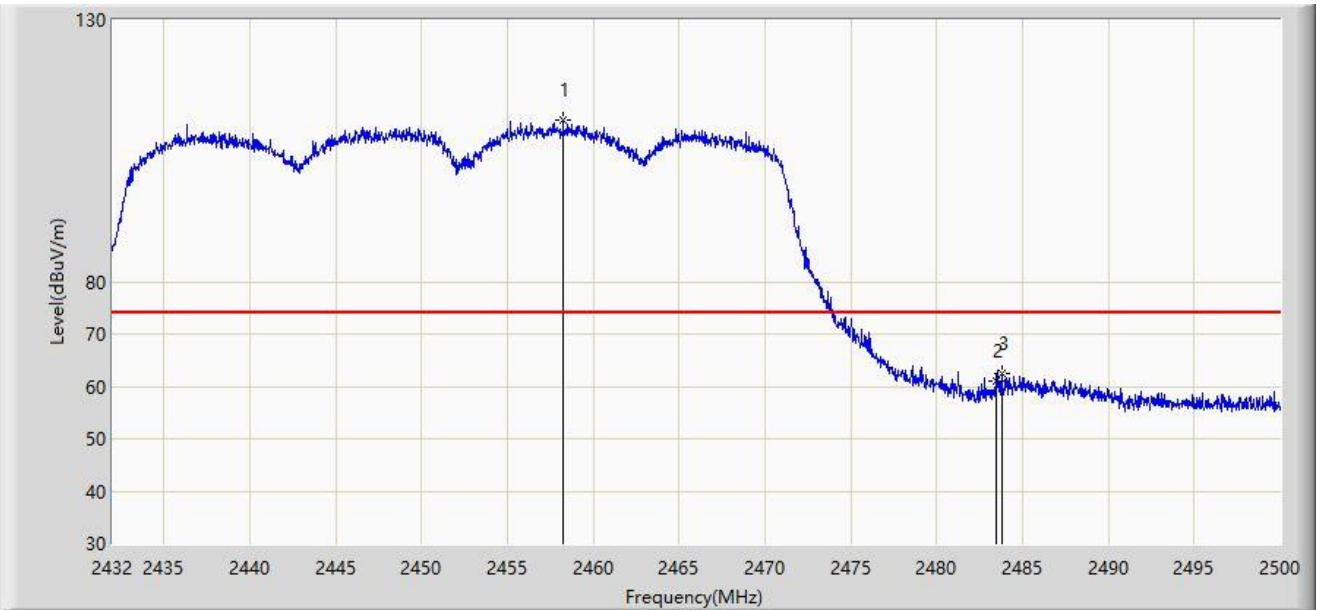


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2458.248	110.821	79.593	N/A	N/A	31.229	PK
2		2483.500	61.008	29.782	-12.992	74.000	31.226	PK
3	*	2483.816	62.384	31.158	-11.616	74.000	31.226	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-10-07
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE
Test Mode: Transmit by 802.11ax-HE40 at 2452MHz	

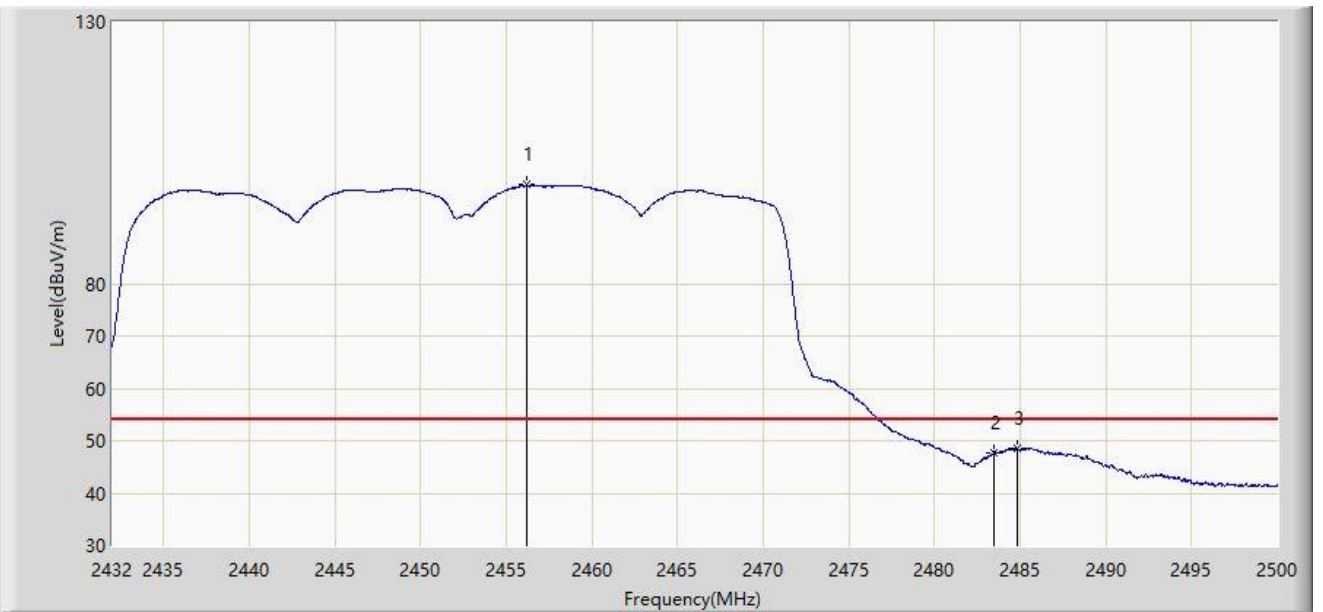

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2456.242	98.870	67.640	N/A	N/A	31.230	AV
2		2483.500	47.804	16.578	-6.196	54.000	31.226	AV
3	*	2484.802	48.595	17.368	-5.405	54.000	31.227	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

### Filter 2#

Site: WZ-AC1	Test Date: 2023-12-19
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11b at 2412MHz	

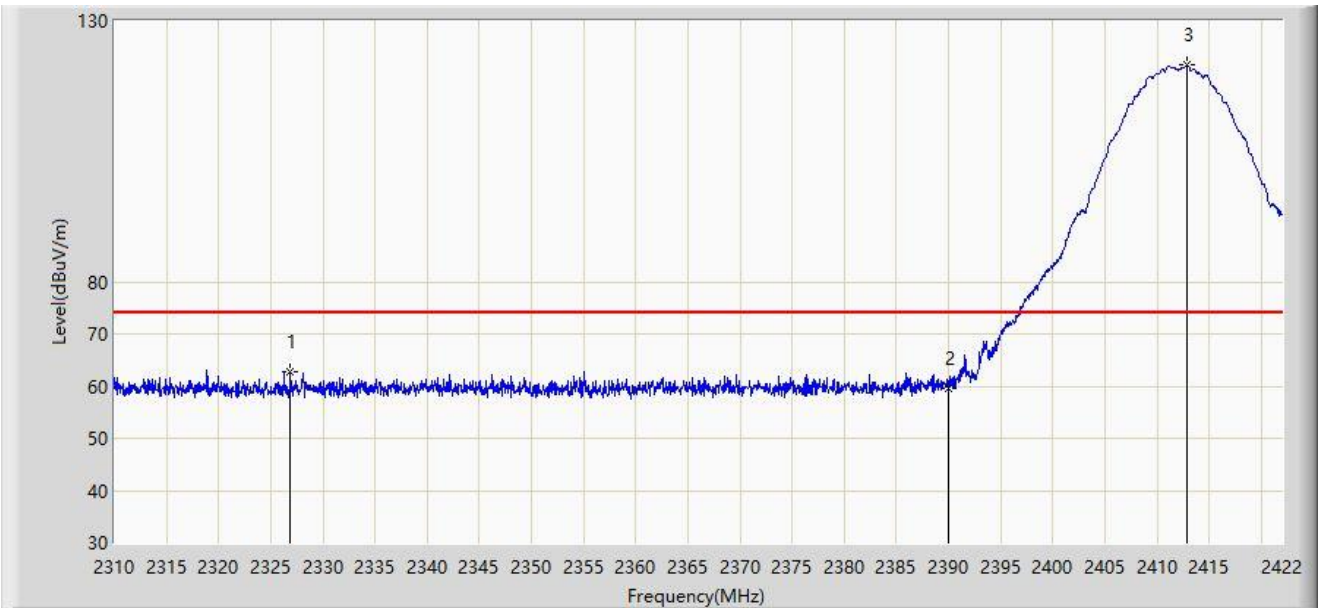


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2326.912	62.686	31.249	-11.314	74.000	31.437	PK
2		2390.000	59.513	28.259	-14.487	74.000	31.254	PK
3		2412.816	121.466	90.214	N/A	N/A	31.252	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-12-19
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11b at 2412MHz	

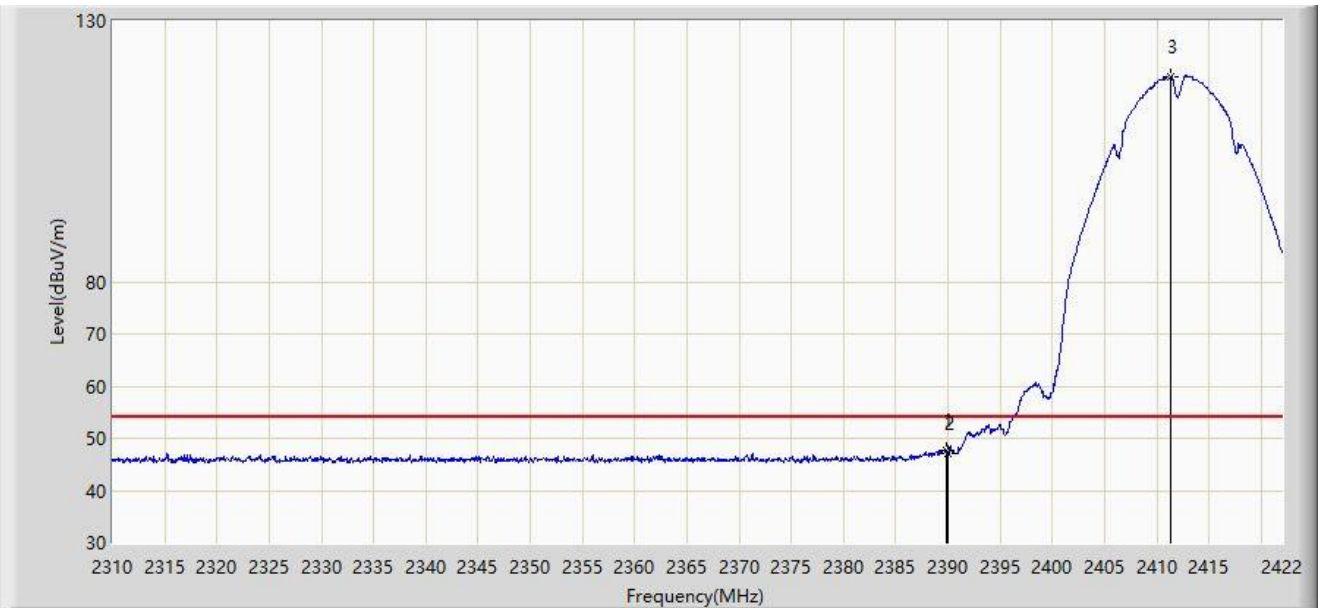


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.800	47.805	16.551	-6.195	54.000	31.254	AV
2		2390.000	47.215	15.961	-6.785	54.000	31.254	AV
3		2411.304	119.358	88.105	N/A	N/A	31.254	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-12-19
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11b at 2412MHz	

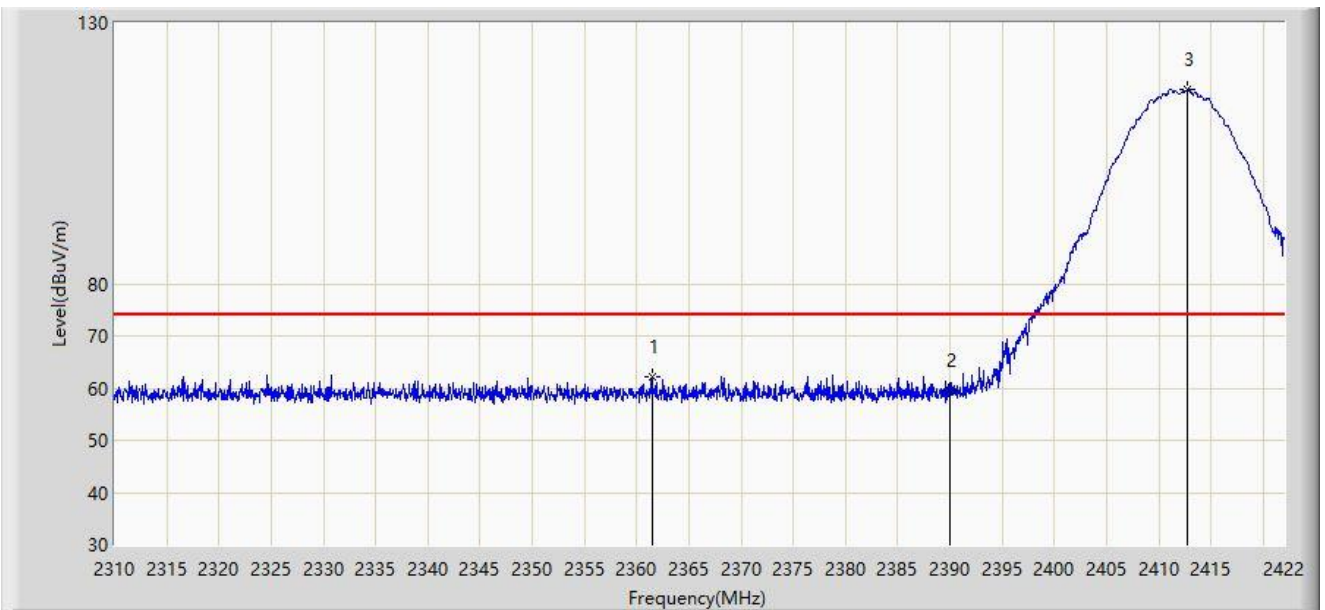


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2361.464	62.216	30.884	-11.784	74.000	31.332	PK
2		2390.000	59.539	28.285	-14.461	74.000	31.254	PK
3		2412.760	117.240	85.988	N/A	N/A	31.252	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-12-19
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11b at 2412MHz	

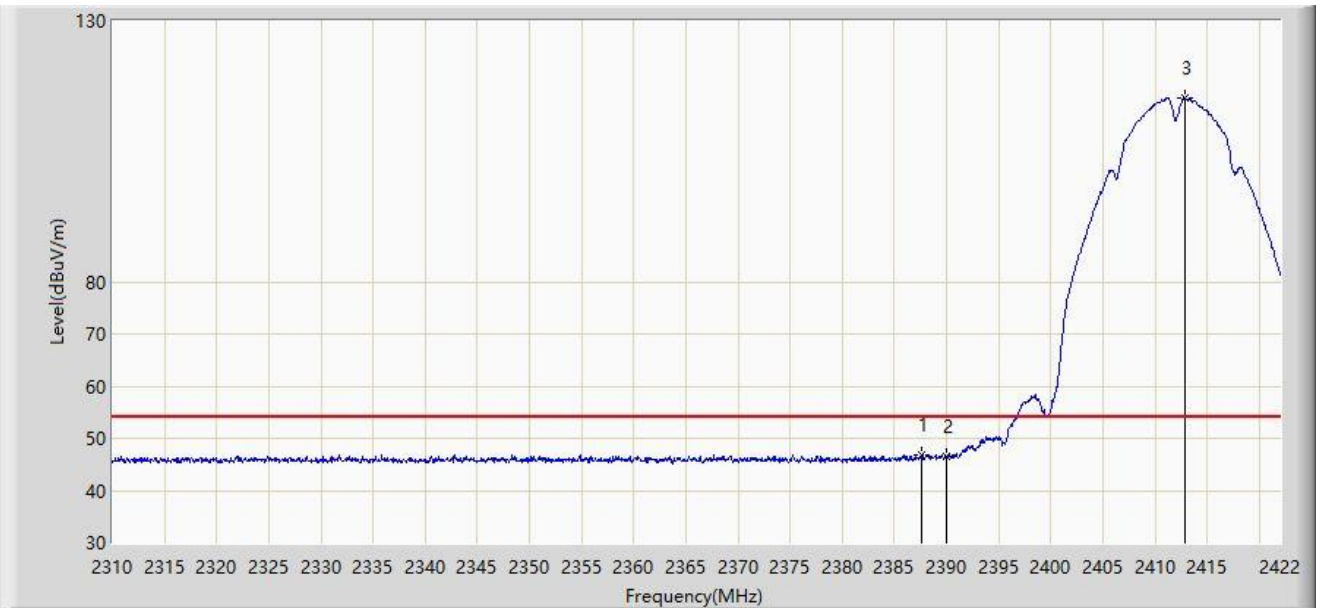


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2387.672	46.922	15.666	-7.078	54.000	31.256	AV
2		2390.000	46.576	15.322	-7.424	54.000	31.254	AV
3		2412.816	115.263	84.011	N/A	N/A	31.252	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-12-19
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11g at 2412MHz	

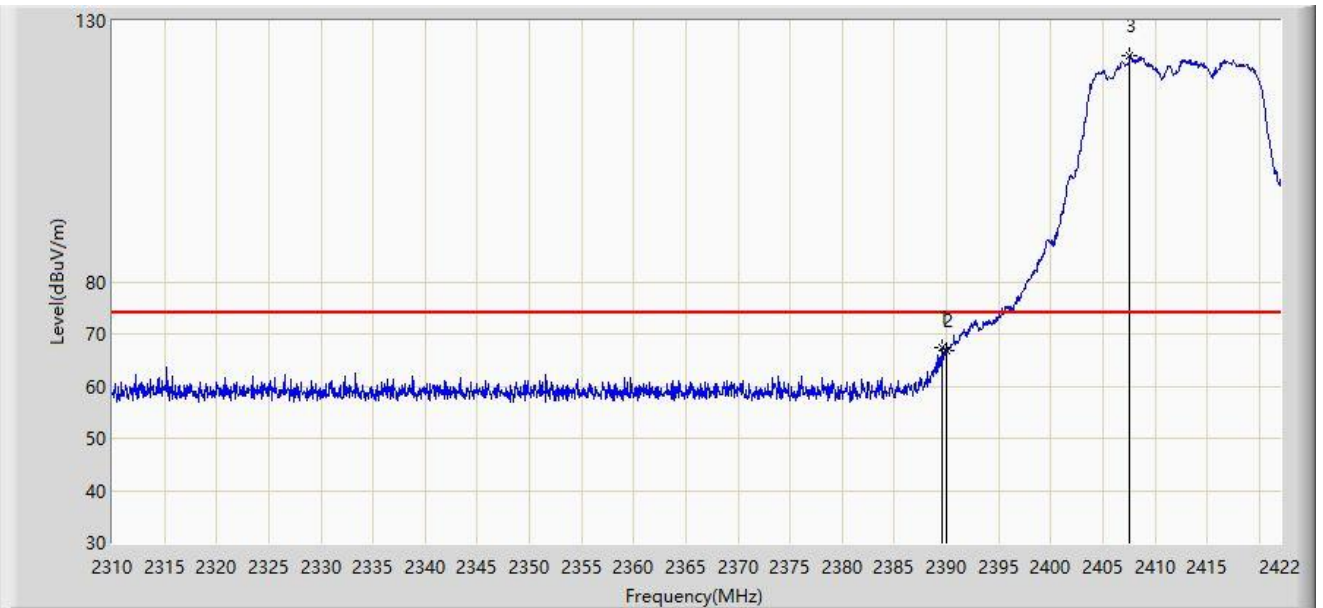


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.576	67.535	36.281	-6.465	74.000	31.254	PK
2		2390.000	66.799	35.545	-7.201	74.000	31.254	PK
3		2407.552	123.387	92.132	N/A	N/A	31.256	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-12-19
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11g at 2412MHz	

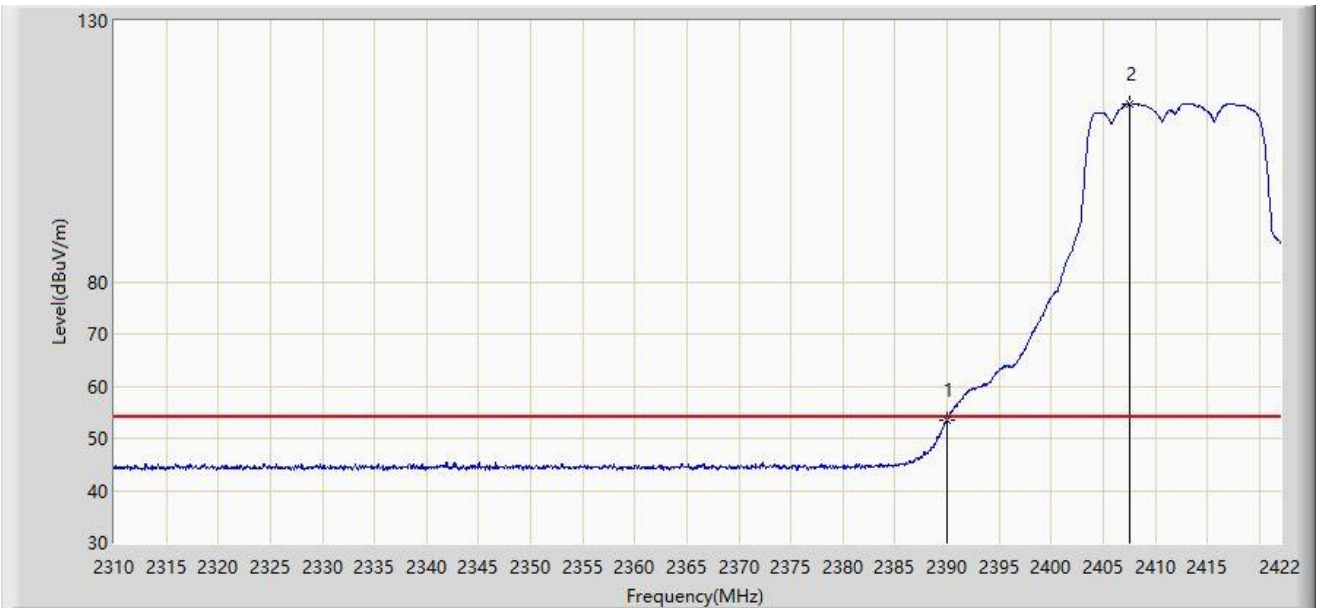

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2390.000	53.511	22.257	-0.489	54.000	31.254	AV
2		2407.496	114.092	82.837	N/A	N/A	31.256	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: WZ-AC1	Test Date: 2023-12-19
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11g at 2412MHz	

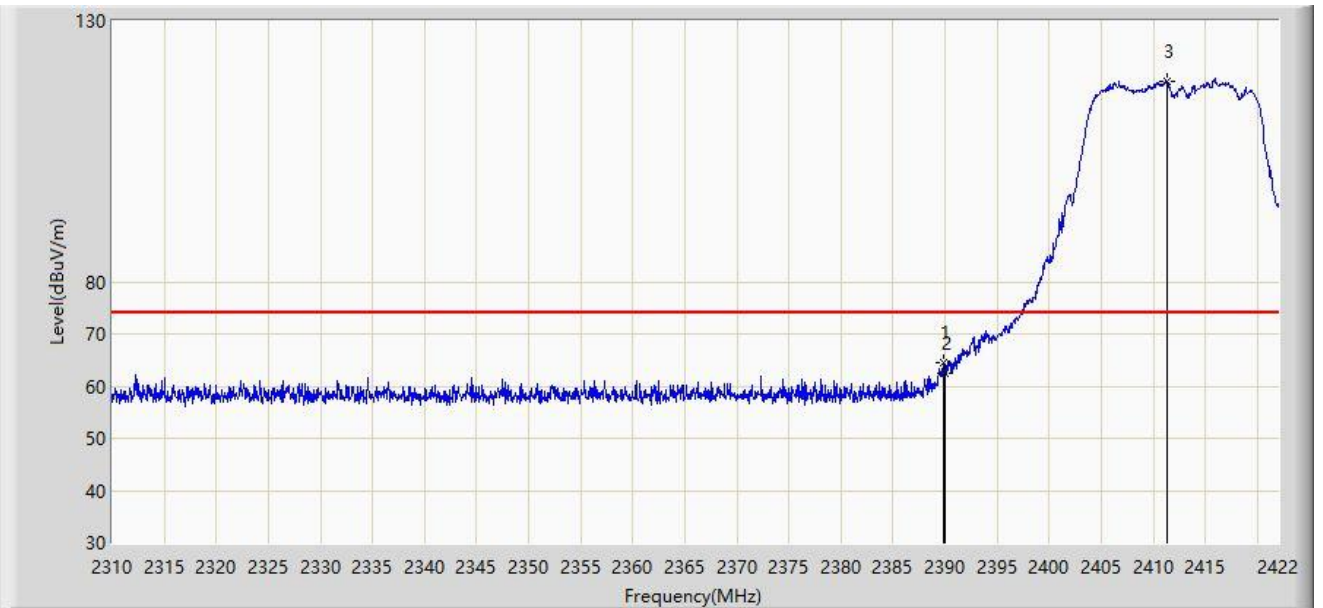


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.912	64.587	33.333	-9.413	74.000	31.254	PK
2		2390.000	62.501	31.247	-11.499	74.000	31.254	PK
3		2411.304	118.304	87.051	N/A	N/A	31.254	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-12-19
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11g at 2412MHz	

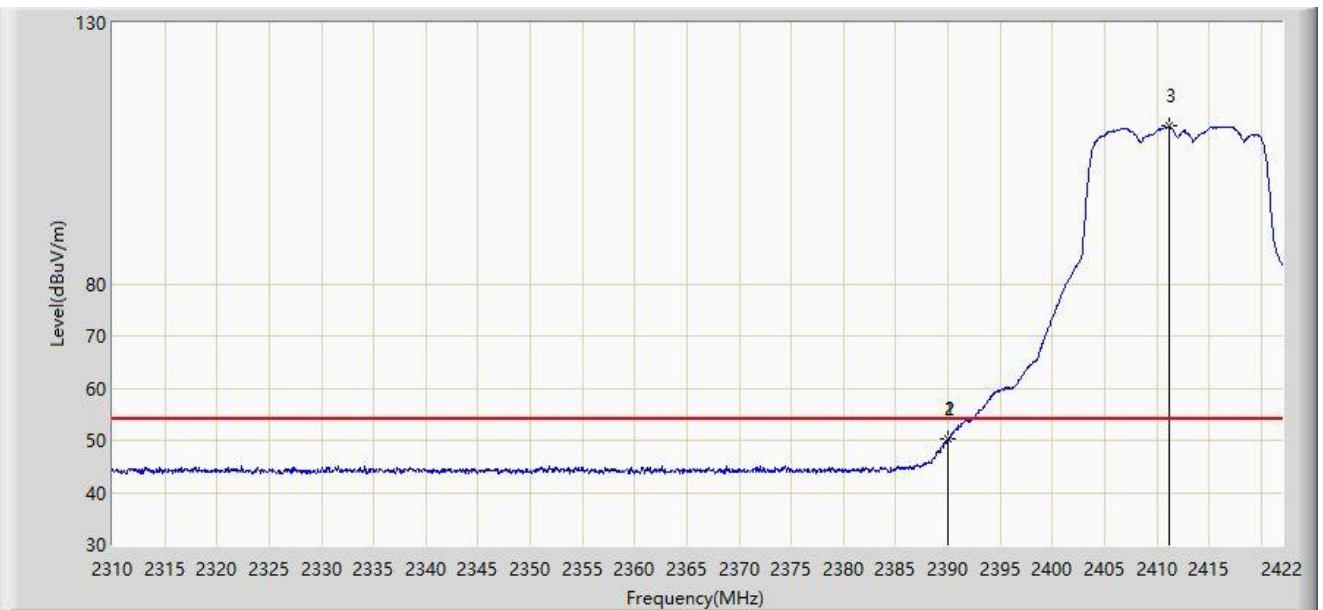


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2389.968	50.272	19.018	-3.728	54.000	31.254	AV
2		2390.000	50.180	18.926	-3.820	54.000	31.254	AV
3		2411.136	110.212	78.959	N/A	N/A	31.254	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-12-19
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

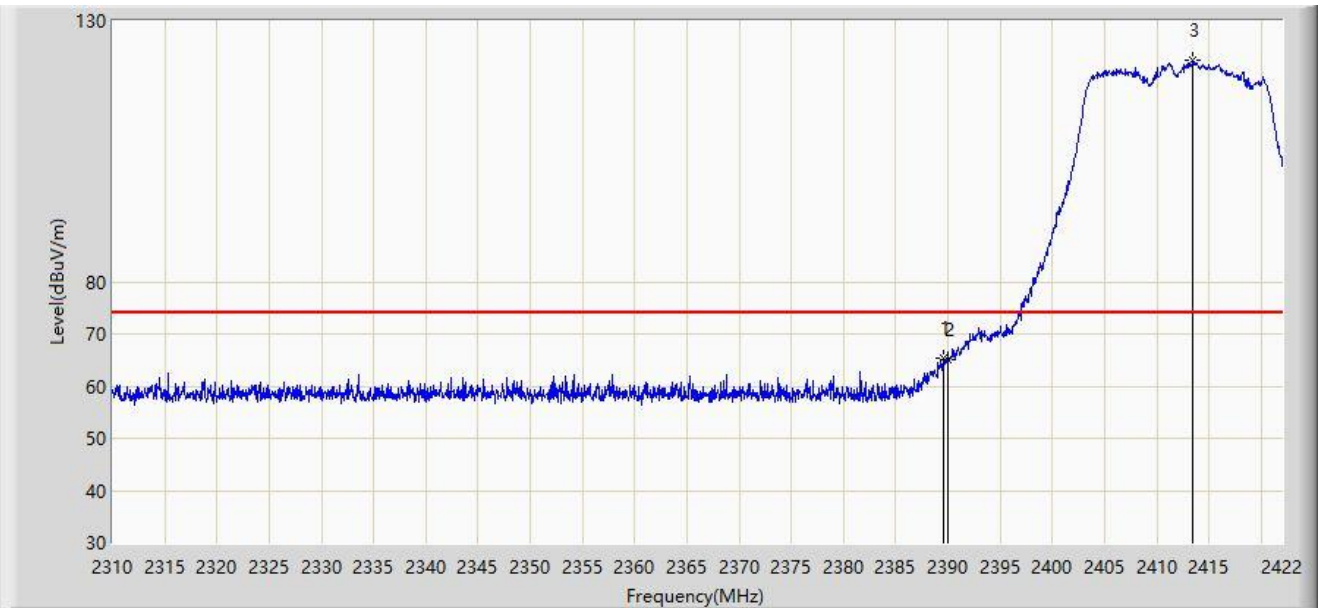


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.520	65.439	34.185	-8.561	74.000	31.254	PK
2		2390.000	64.939	33.685	-9.061	74.000	31.254	PK
3		2413.488	122.372	91.120	N/A	N/A	31.251	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-12-19
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

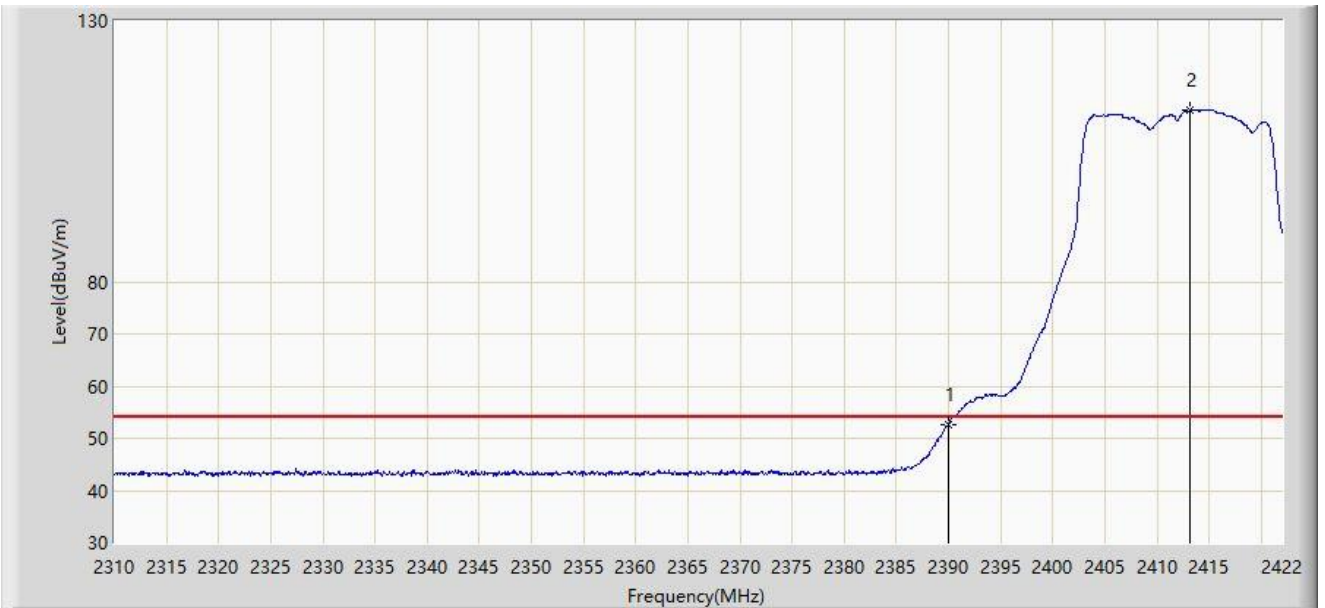


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2390.000	52.680	21.426	-1.320	54.000	31.254	AV
2		2413.096	112.798	81.546	N/A	N/A	31.252	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-12-19
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

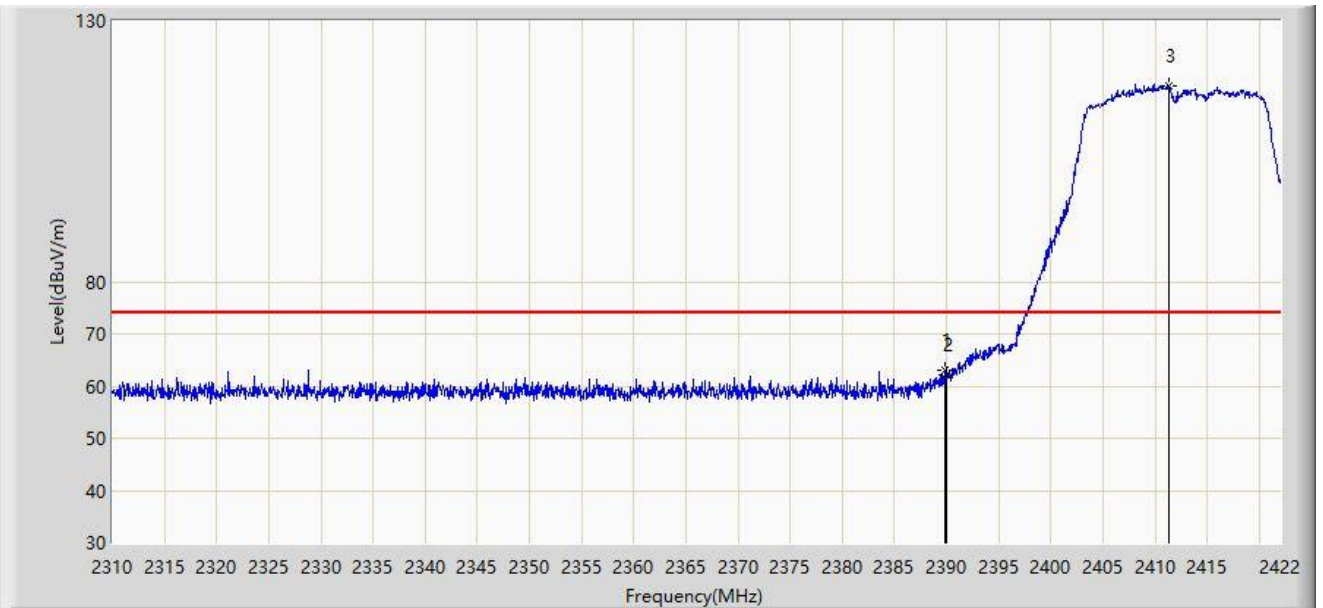


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2389.856	63.077	31.823	-10.923	74.000	31.254	PK
2		2390.000	62.076	30.822	-11.924	74.000	31.254	PK
3		2411.304	117.511	86.258	N/A	N/A	31.254	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-12-19
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

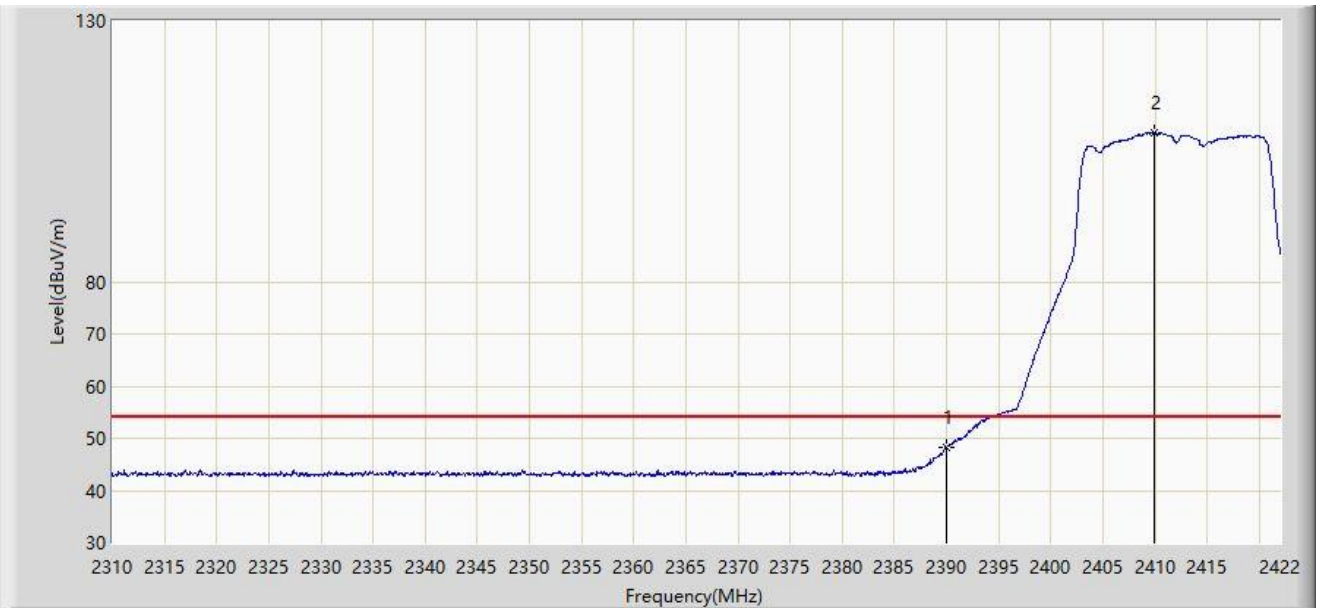


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	48.265	17.011	-5.735	54.000	31.254	AV
2		2409.904	108.678	77.424	N/A	N/A	31.254	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-12-19
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

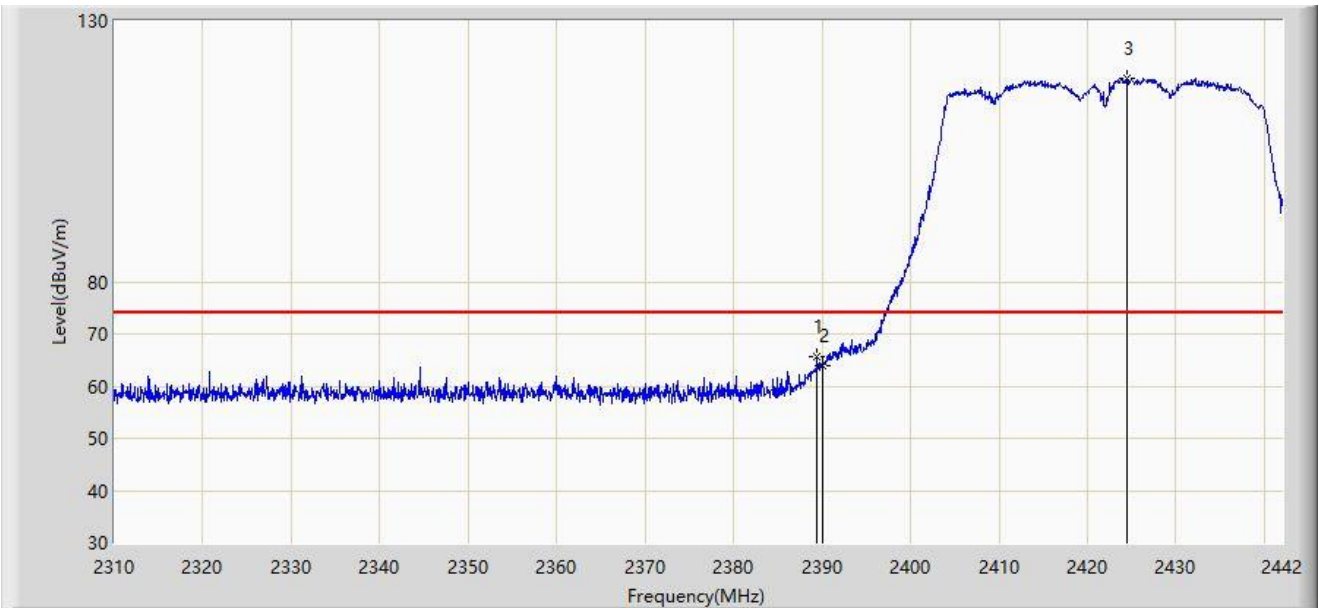


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	2389.464	65.548	34.294	-8.452	74.000	31.254	PK
2		2390.000	63.965	32.711	-10.035	74.000	31.254	PK
3		2424.444	119.106	87.872	N/A	N/A	31.234	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2023-12-19
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

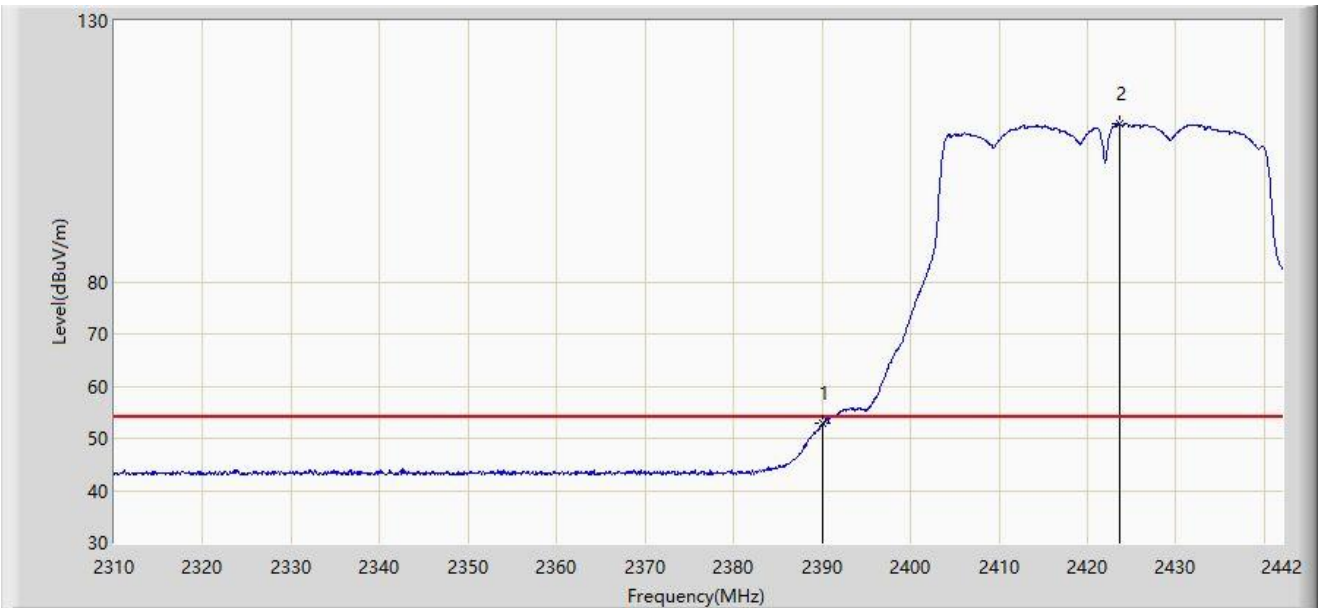

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	52.755	21.501	-1.245	54.000	31.254	AV
2		2423.652	110.313	79.076	N/A	N/A	31.236	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: WZ-AC1	Test Date: 2023-12-19
Limit: FCC_2.4G_RE(3m)	Engineer: Frank Xue
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

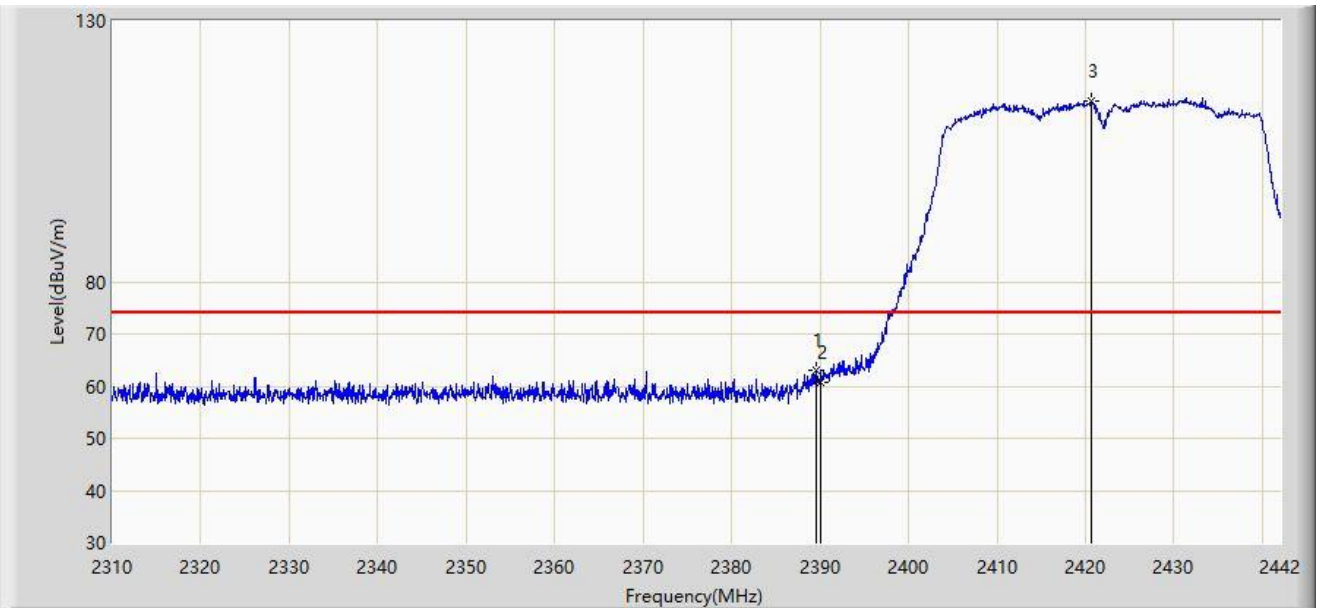

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.530	62.986	31.732	-11.014	74.000	31.254	PK
2		2390.000	60.737	29.483	-13.263	74.000	31.254	PK
3		2420.682	114.701	83.455	N/A	N/A	31.246	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).