




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 225 of 405

A.2. Power Spectral Density



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5180.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

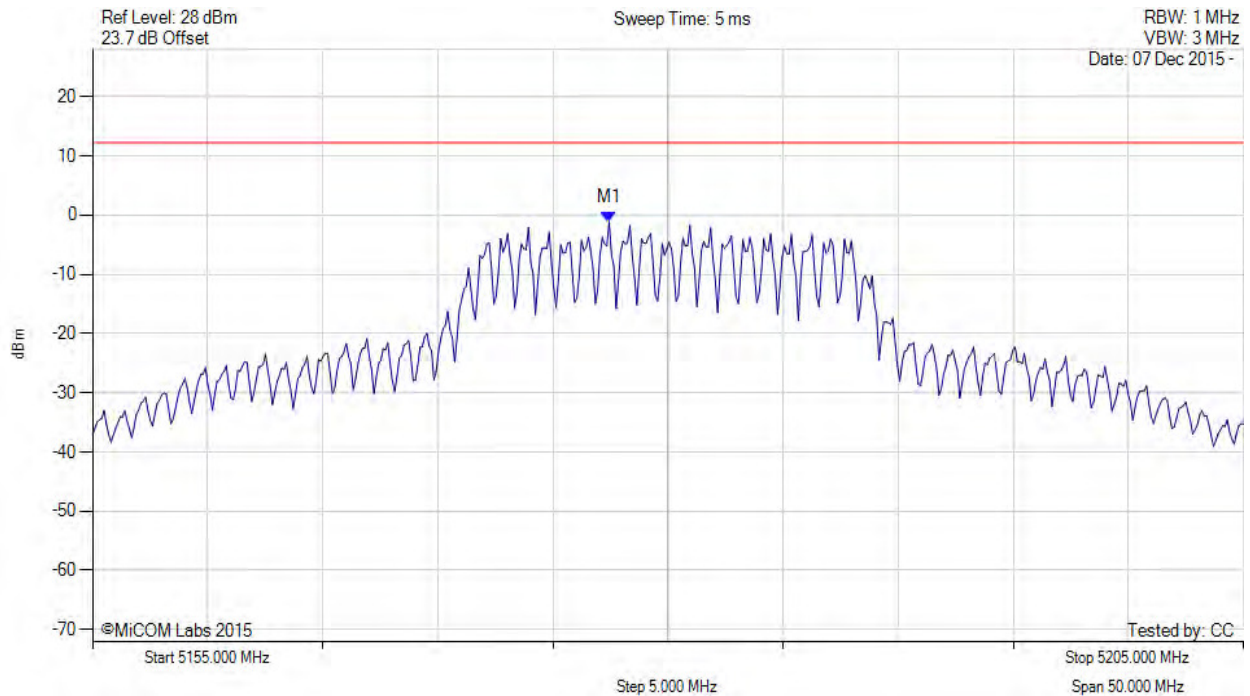

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5177.445 MHz : -1.166 dBm	Limit: ≤ 12.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 226 of 405

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5180.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

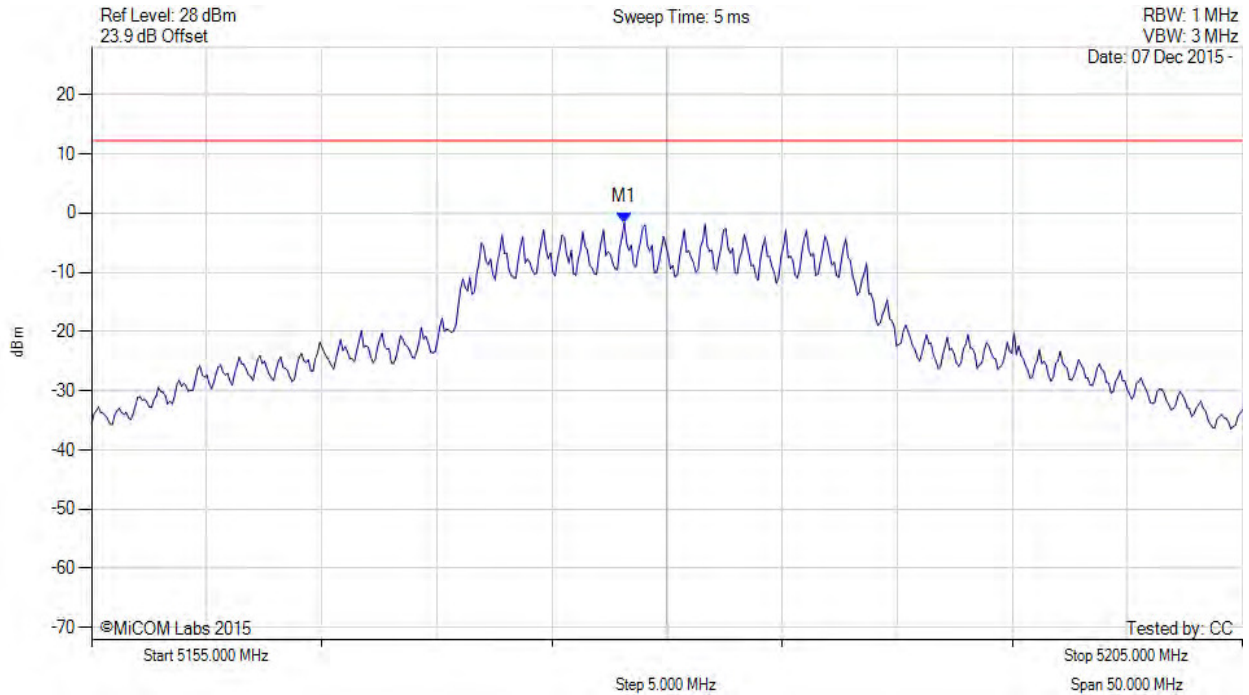

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5178.146 MHz : -1.582 dBm	Limit: ≤ 12.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 227 of 405

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5180.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

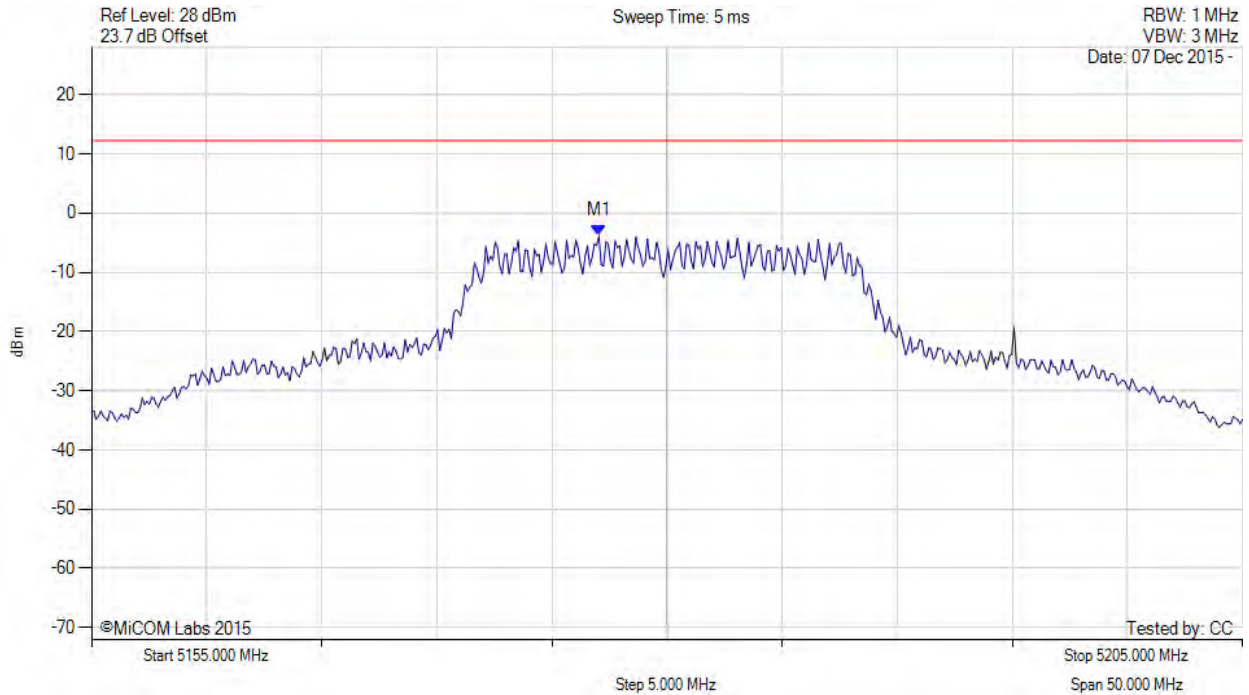

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5177.044 MHz : -3.876 dBm	Limit: ≤ 12.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 228 of 405

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5180.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc

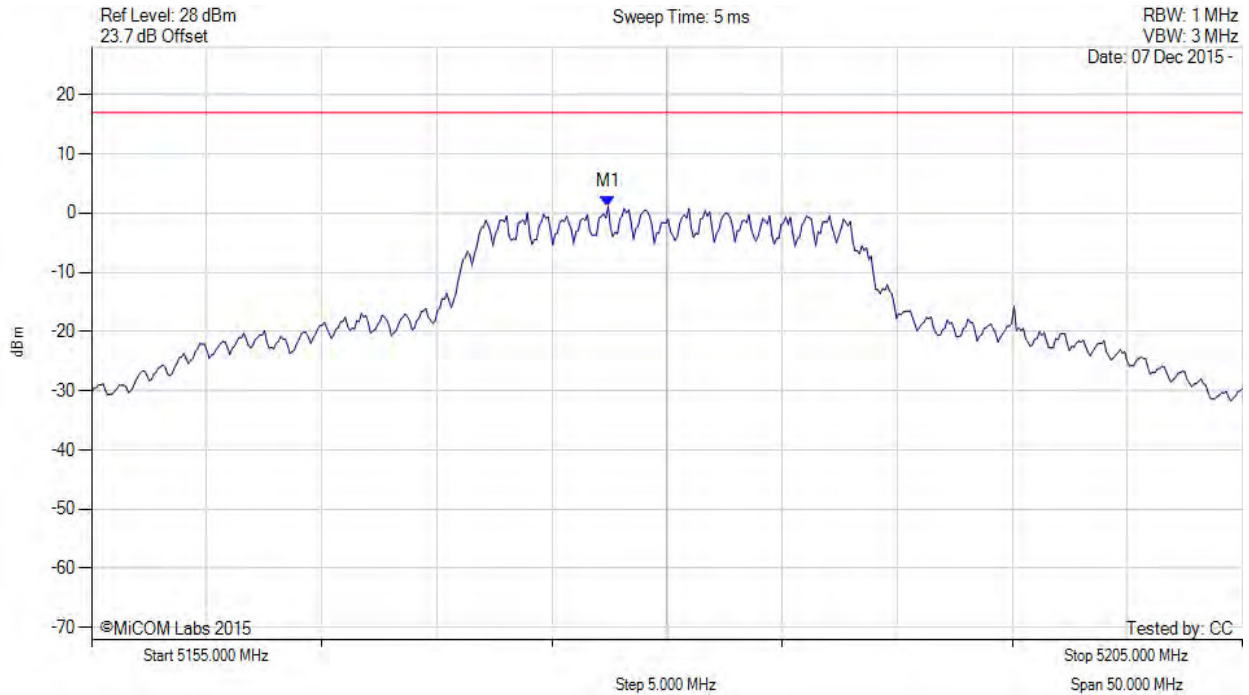

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5177.400 MHz : 1.088 dBm M1 + DCCF : 5177.400 MHz : 3.684 dBm Duty Cycle Correction Factor : +2.6 dB	Limit: ≤ 17.0 dBm Margin: -13.3 dB

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5200.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

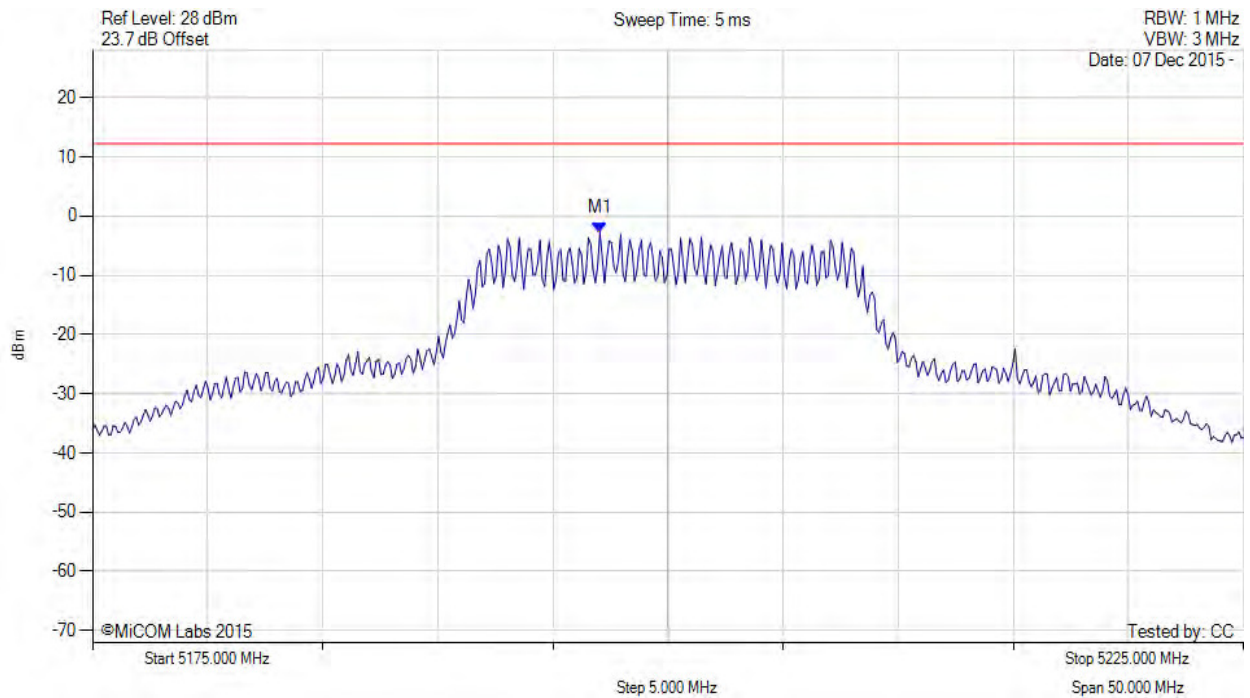

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5197.044 MHz : -2.817 dBm	Limit: ≤ 12.230 dBm

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5200.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

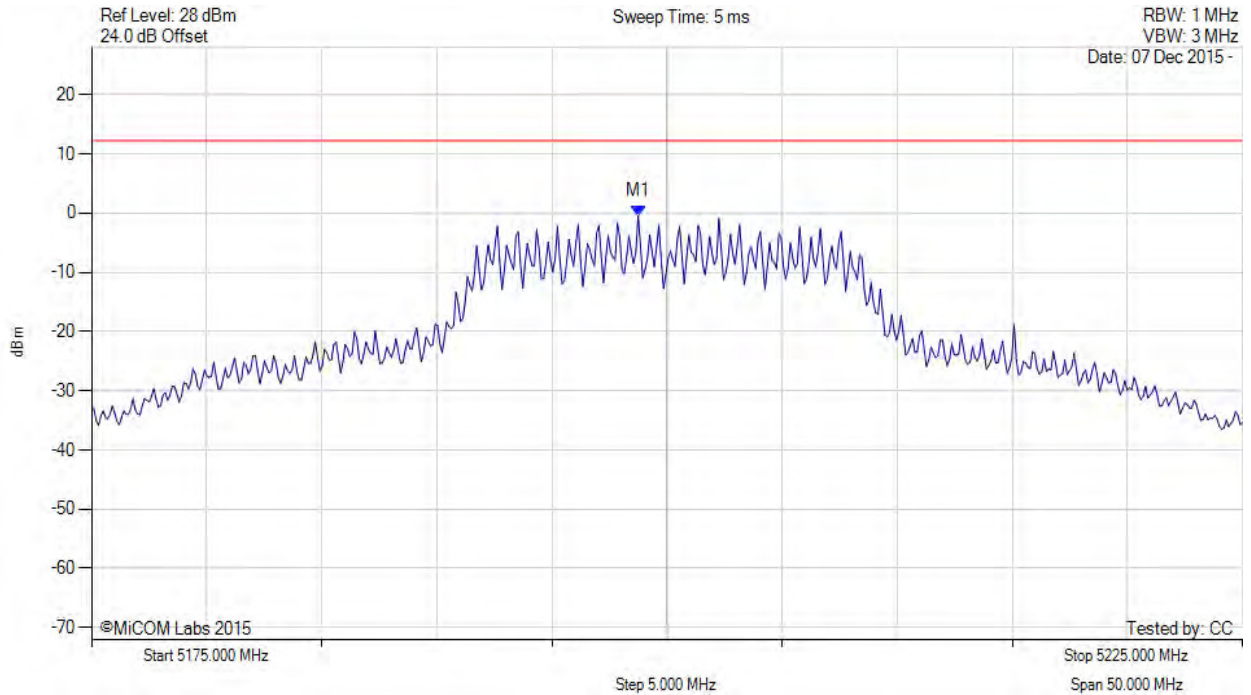

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5198.747 MHz : -0.459 dBm	Channel Frequency: 5200.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 231 of 405

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5200.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

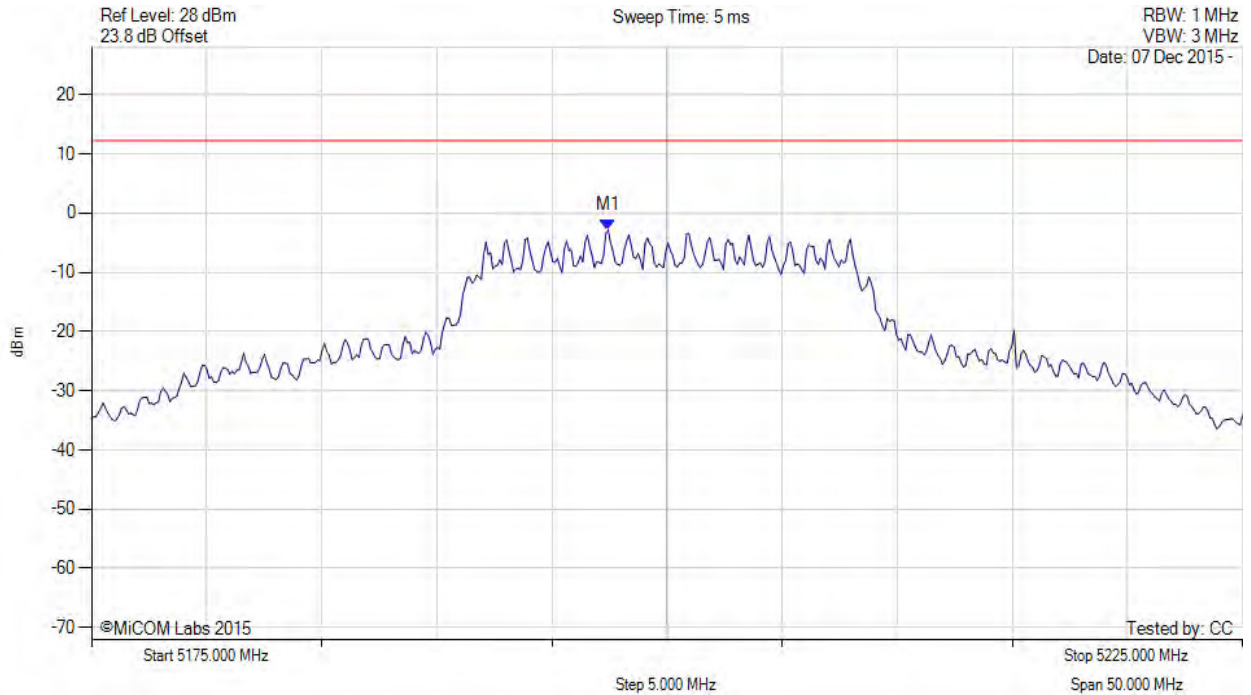

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5197.445 MHz : -2.874 dBm	Limit: ≤ 12.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 232 of 405

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5200.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc

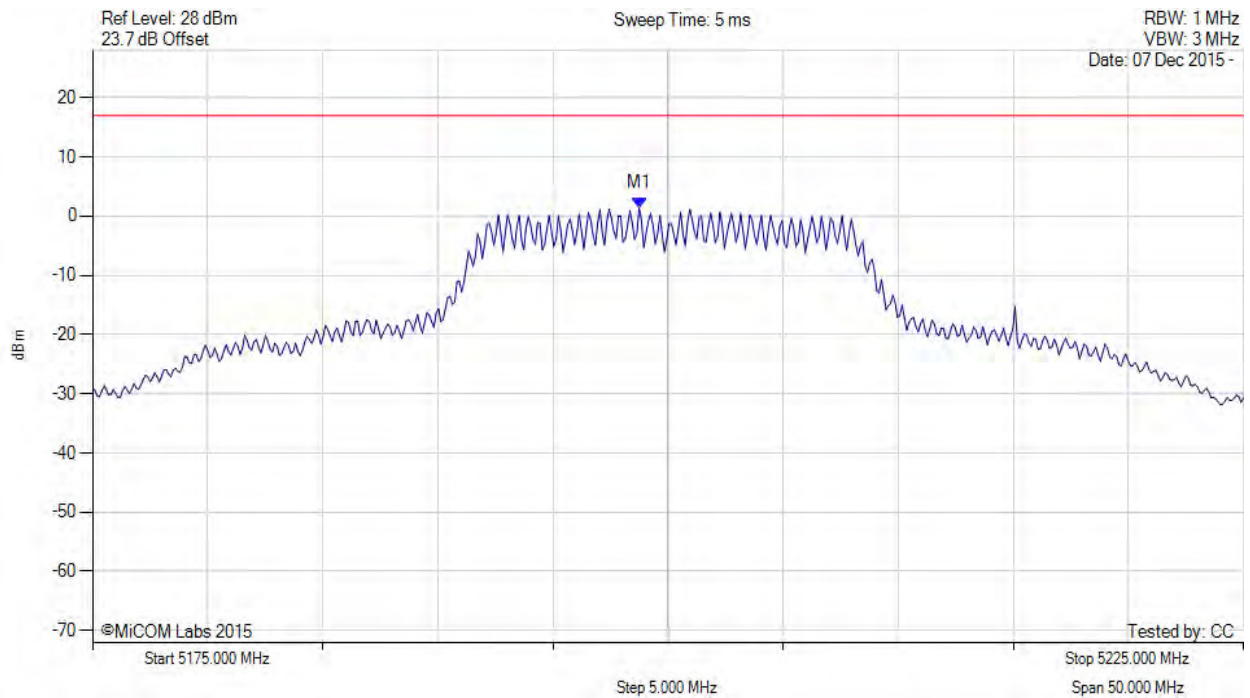

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5198.700 MHz : 1.413 dBm M1 + DCCF : 5198.700 MHz : 4.009 dBm Duty Cycle Correction Factor : +2.6 dB	Limit: ≤ 17.0 dBm Margin: -13.0 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 233 of 405

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5240.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

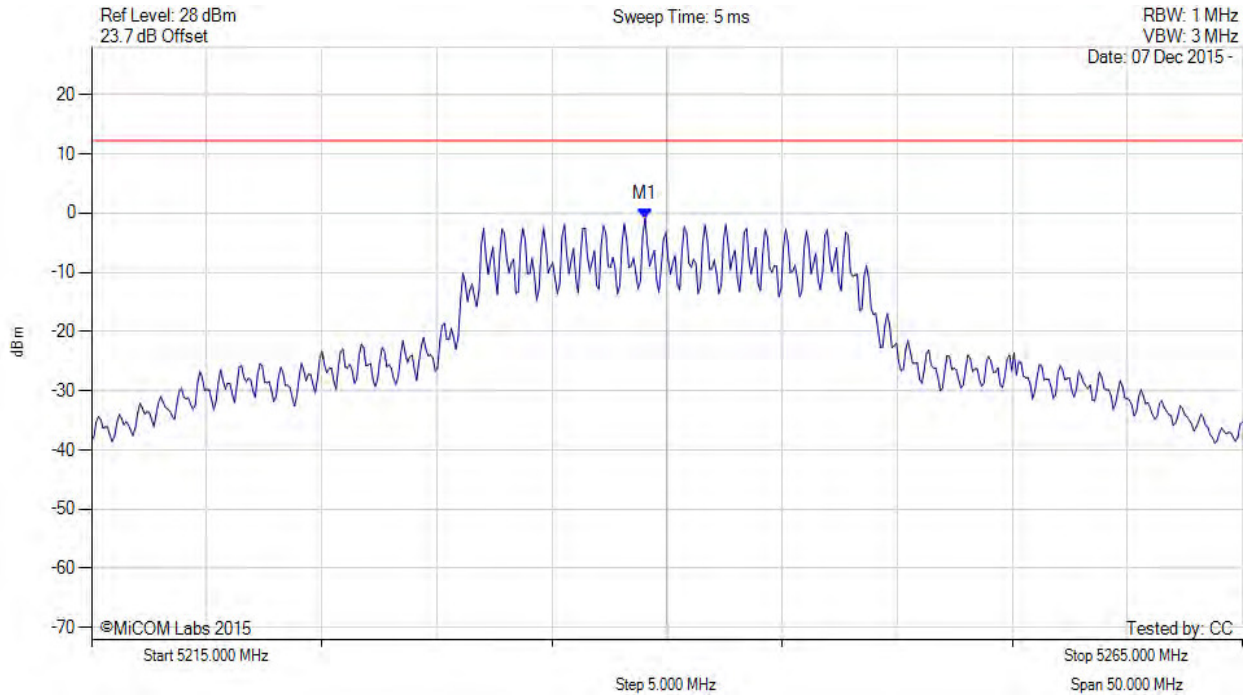

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5239.048 MHz : -0.944 dBm	Limit: ≤ 12.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 234 of 405

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5240.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

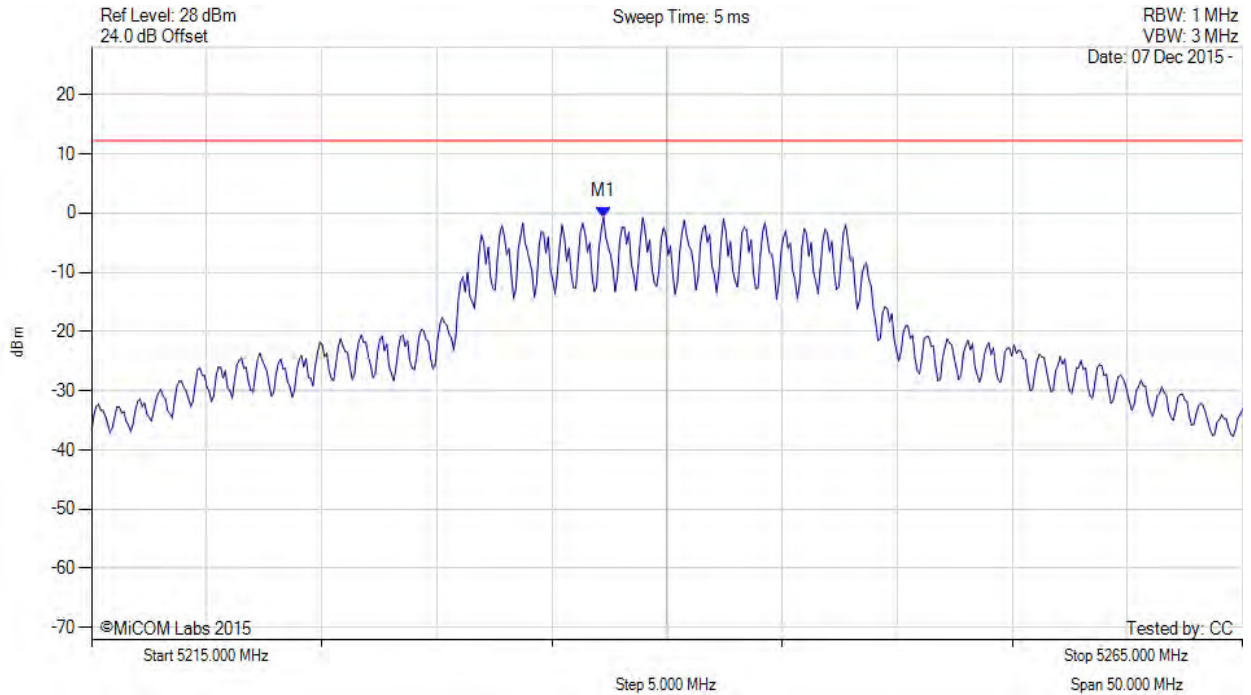

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5237.244 MHz : -0.650 dBm	Limit: ≤ 12.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 235 of 405

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5240.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

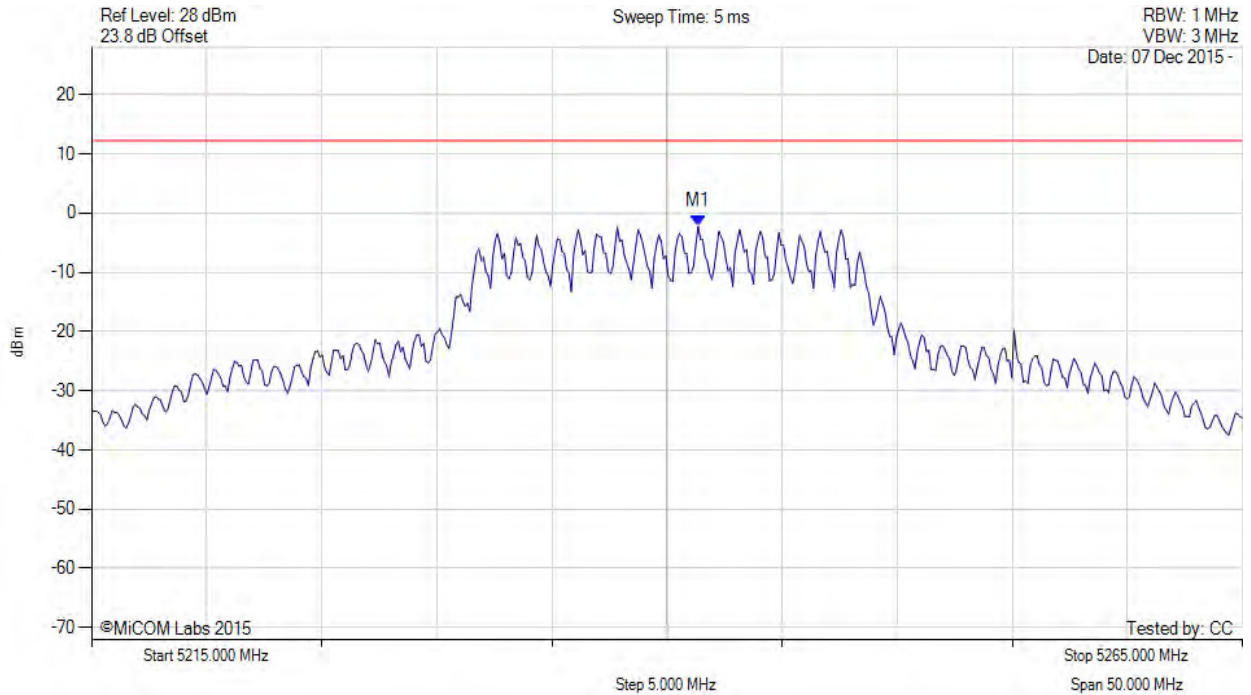

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5241.353 MHz : -2.239 dBm	Limit: ≤ 12.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 236 of 405

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5240.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc

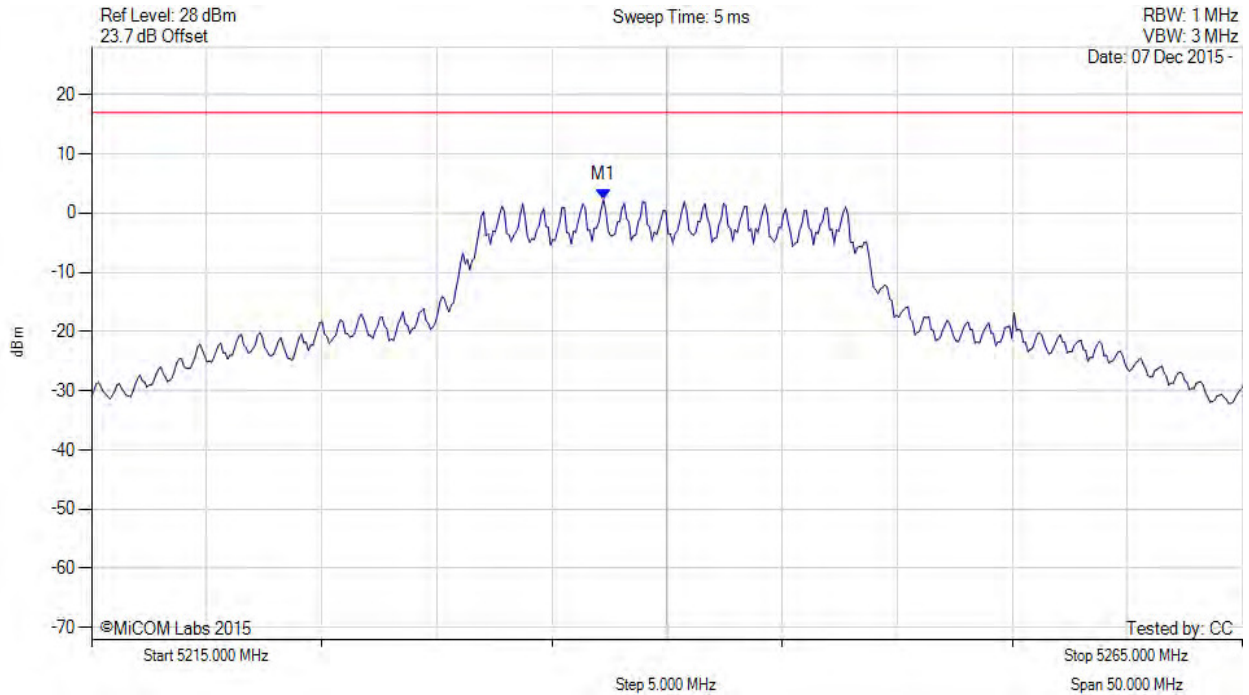

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5237.200 MHz : 2.257 dBm M1 + DCCF : 5237.200 MHz : 4.853 dBm Duty Cycle Correction Factor : +2.6 dB	Limit: ≤ 17.0 dBm Margin: -12.1 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 237 of 405

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5210.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

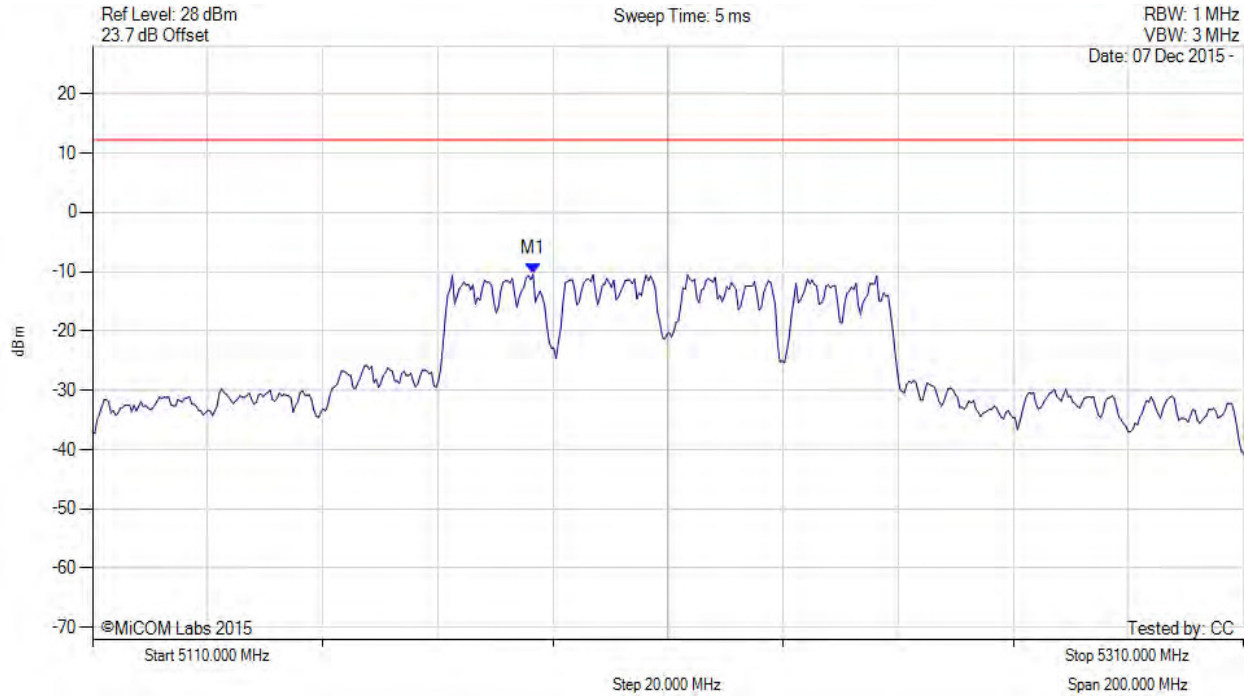

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5186.553 MHz : -10.404 dBm	Limit: ≤ 12.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 238 of 405

POWER SPECTRAL DENSITY



Variante: 802.11ac-80, Channel: 5210.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

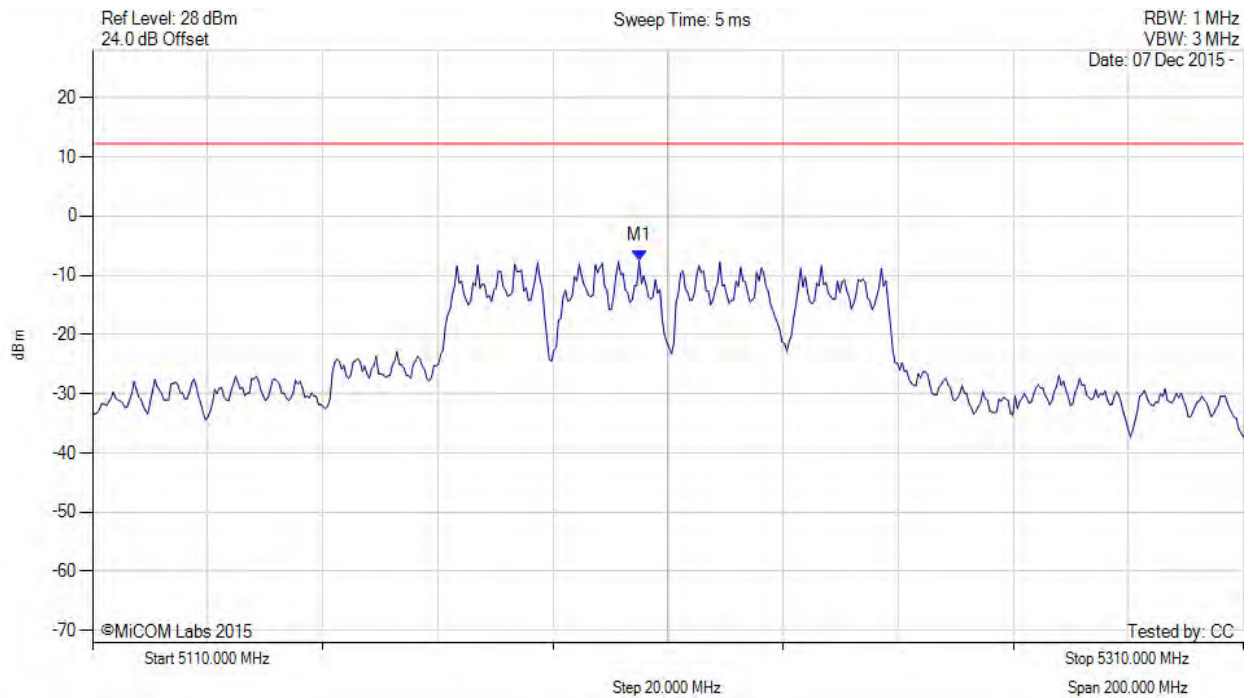

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5204.990 MHz : -7.504 dBm	Limit: ≤ 12.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 239 of 405

POWER SPECTRAL DENSITY



Variante: 802.11ac-80, Channel: 5210.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

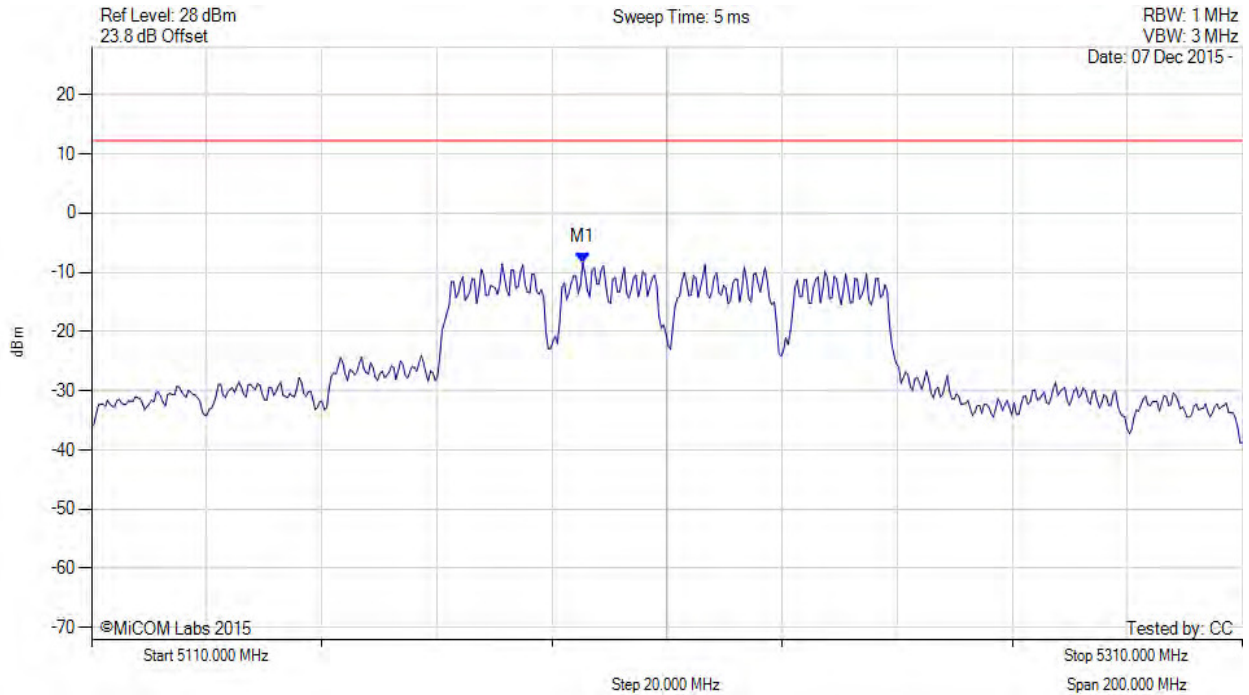

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5195.371 MHz : -8.368 dBm	Limit: ≤ 12.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 240 of 405

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5210.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc

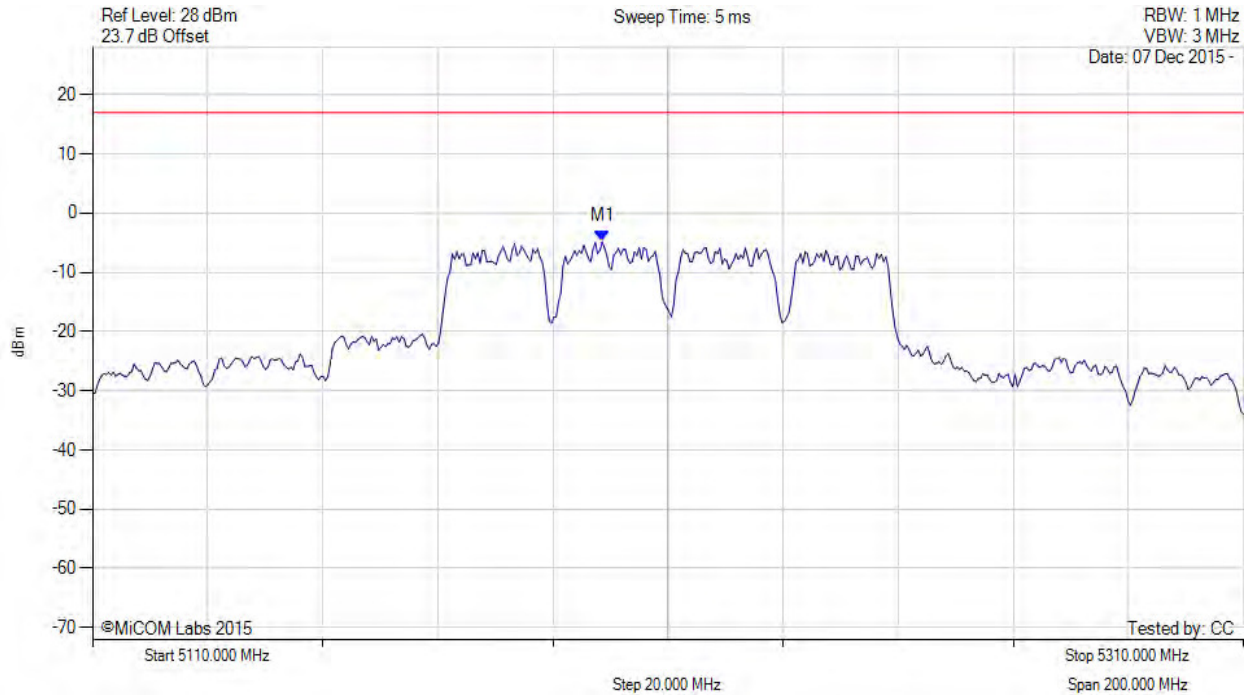

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5198.600 MHz : -4.846 dBm M1 + DCCF : 5198.600 MHz : -2.770 dBm Duty Cycle Correction Factor : +2.08 dB	Limit: ≤ 17.0 dBm Margin: -19.7 dB

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5180.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

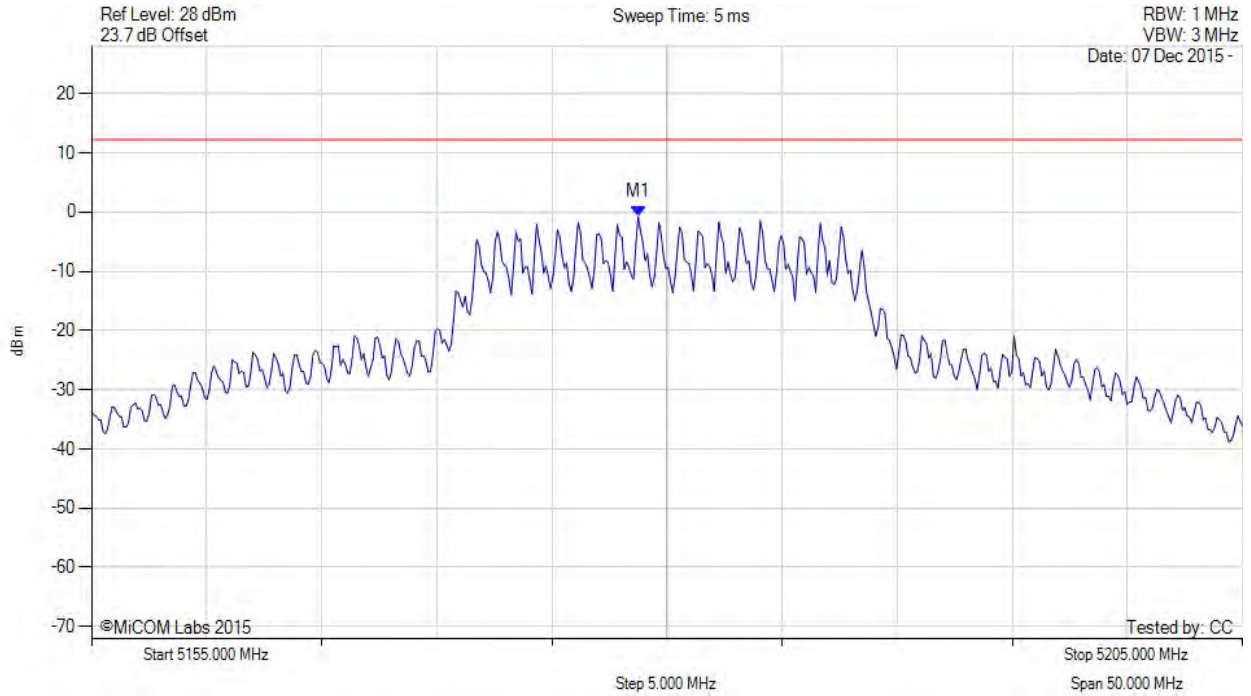

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5178.747 MHz : -0.817 dBm	Limit: ≤ 12.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 242 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5180.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

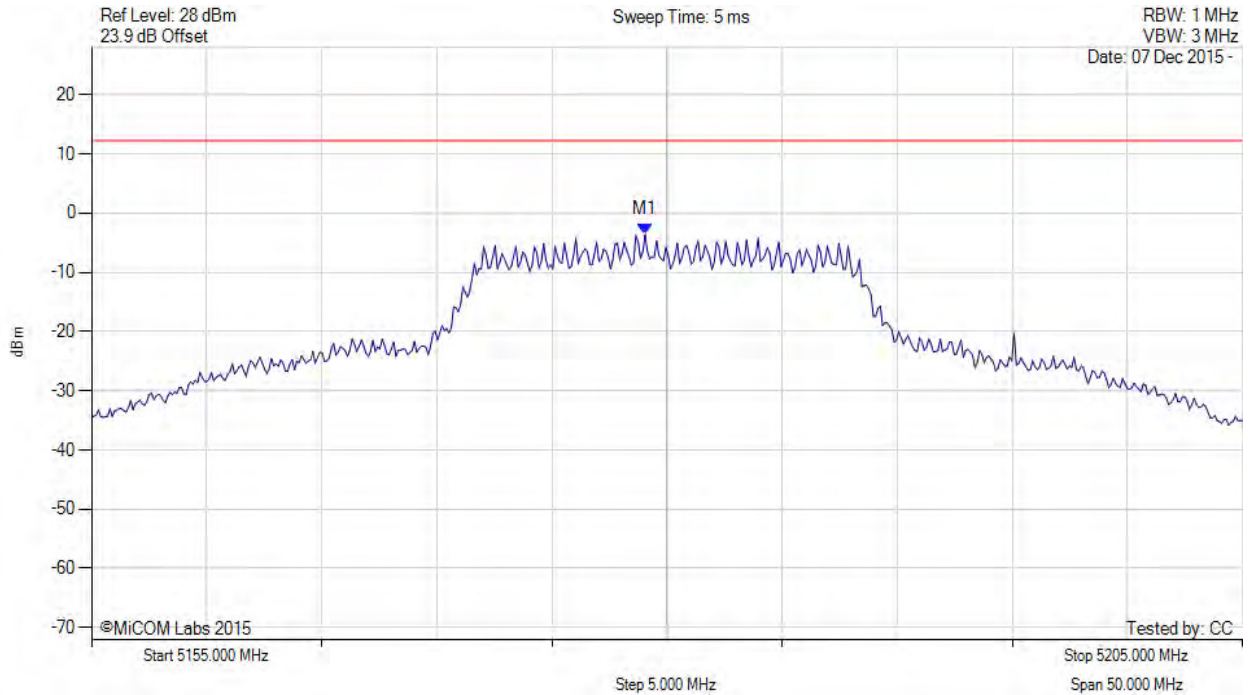

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5179.048 MHz : -3.623 dBm	Limit: ≤ 12.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 243 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5180.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

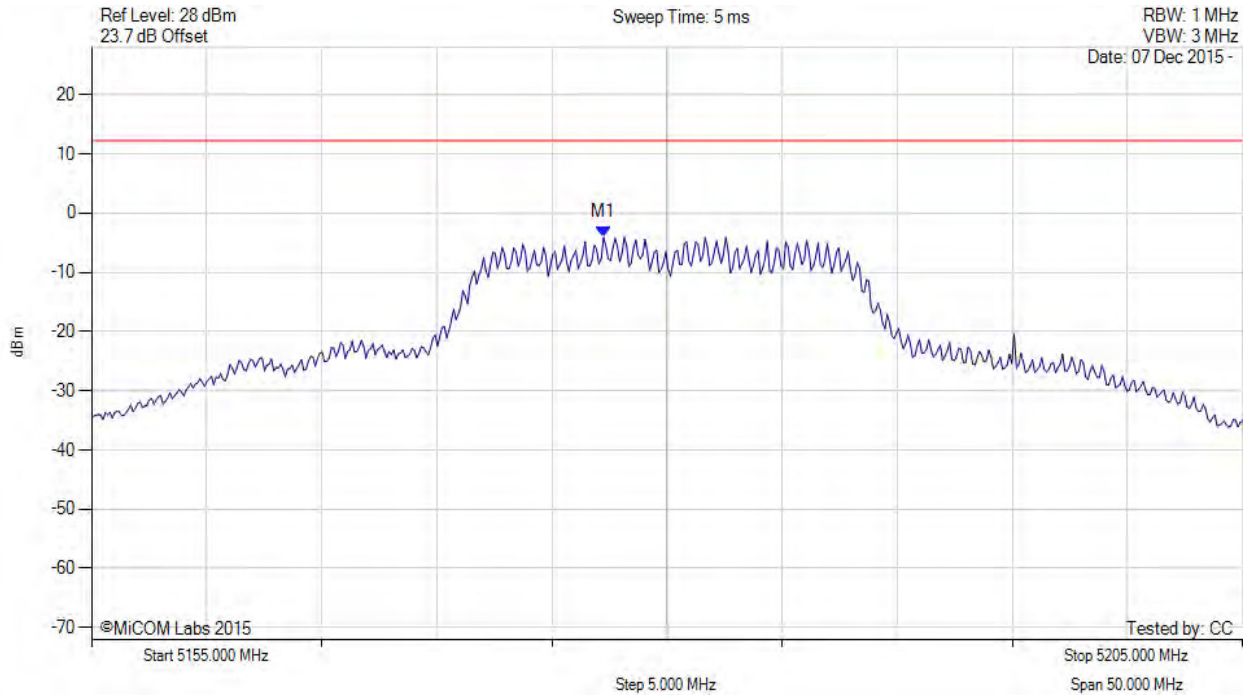

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5177.244 MHz : -4.091 dBm	Limit: ≤ 12.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 244 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5180.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc

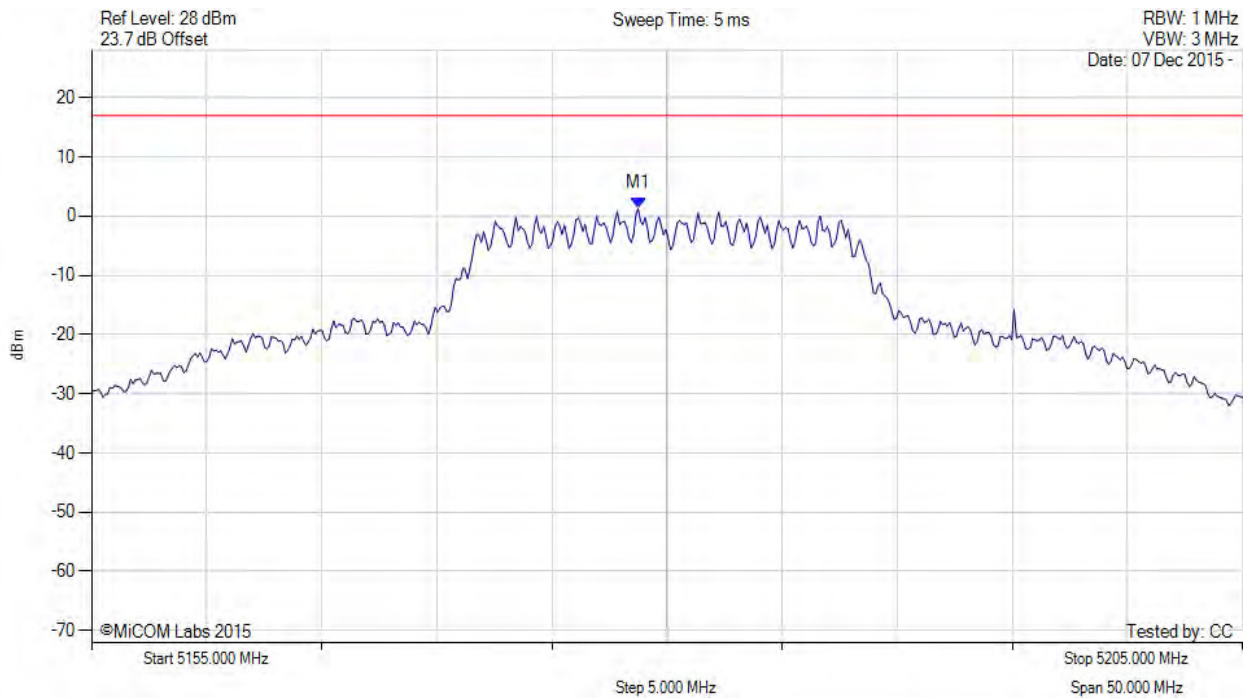

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5178.700 MHz : 1.308 dBm M1 + DCCF : 5178.700 MHz : 1.670 dBm Duty Cycle Correction Factor : +0.36 dB	Limit: ≤ 17.0 dBm Margin: -15.3 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 245 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5200.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

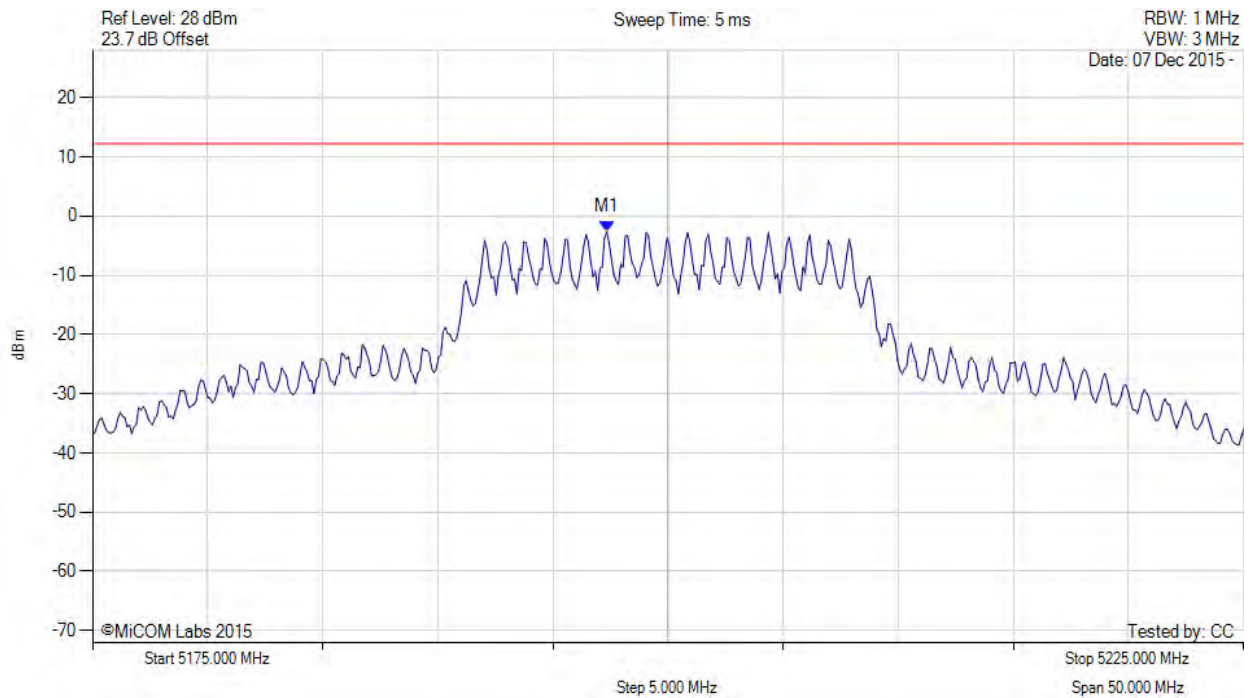

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5197.345 MHz : -2.685 dBm	Limit: ≤ 12.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 246 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5200.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

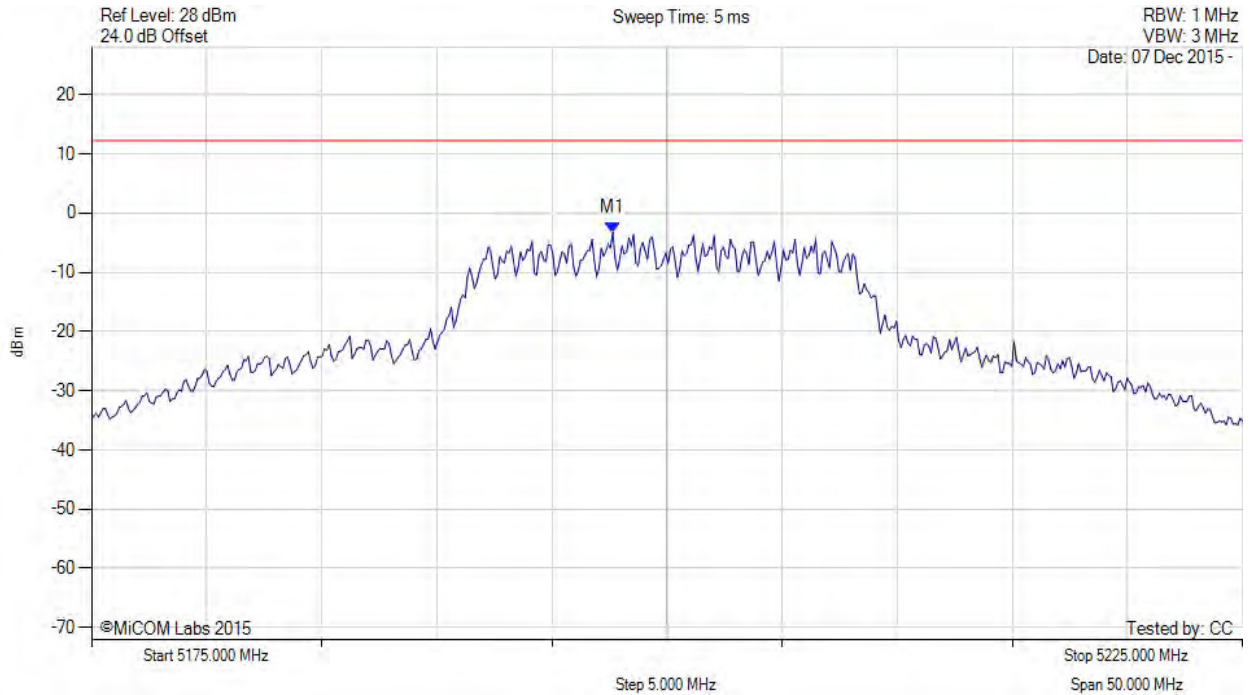

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5197.645 MHz : -3.251 dBm	Channel Frequency: 5200.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 247 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5200.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

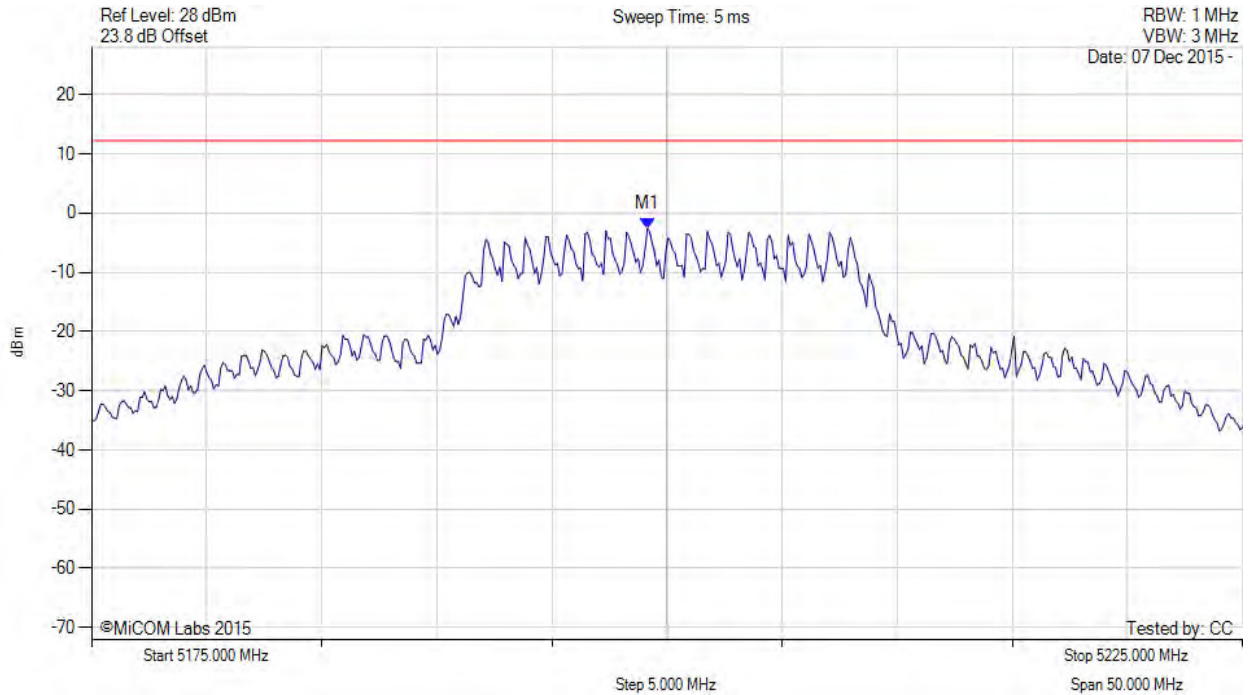

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5199.148 MHz : -2.572 dBm	Limit: ≤ 12.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 248 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5200.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc

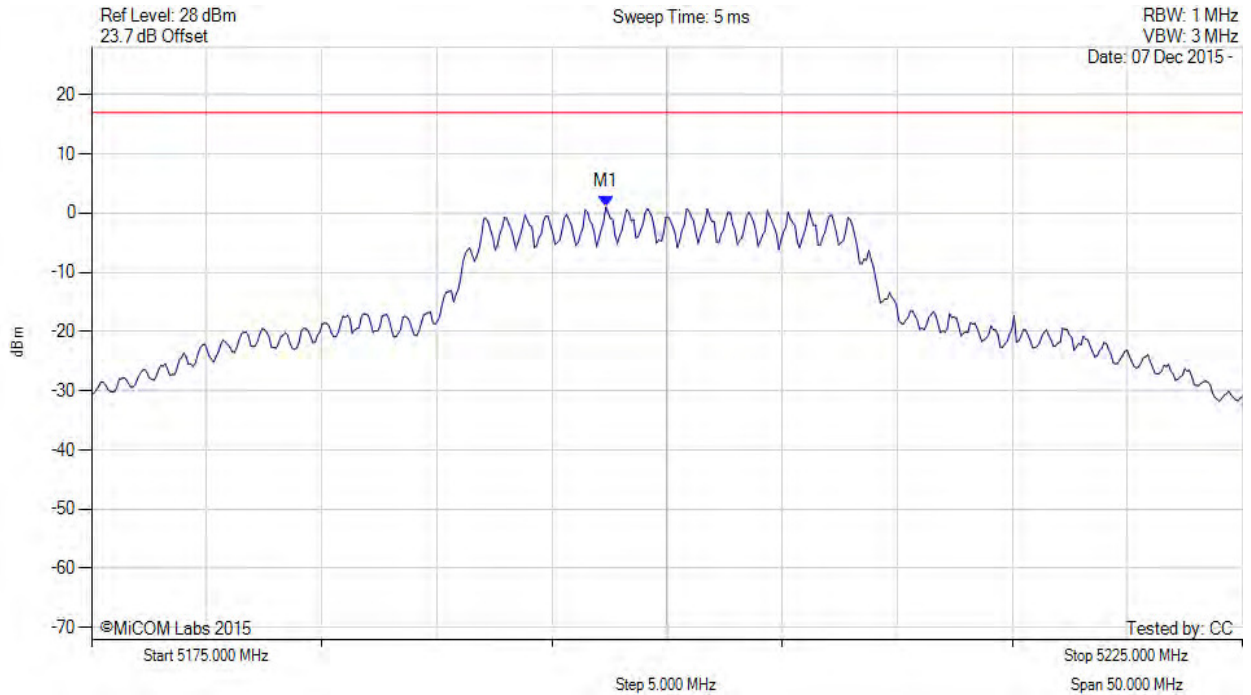

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5197.300 MHz : 1.027 dBm M1 + DCCF : 5197.300 MHz : 1.389 dBm Duty Cycle Correction Factor : +0.36 dB	Limit: ≤ 17.0 dBm Margin: -15.6 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 249 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5240.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

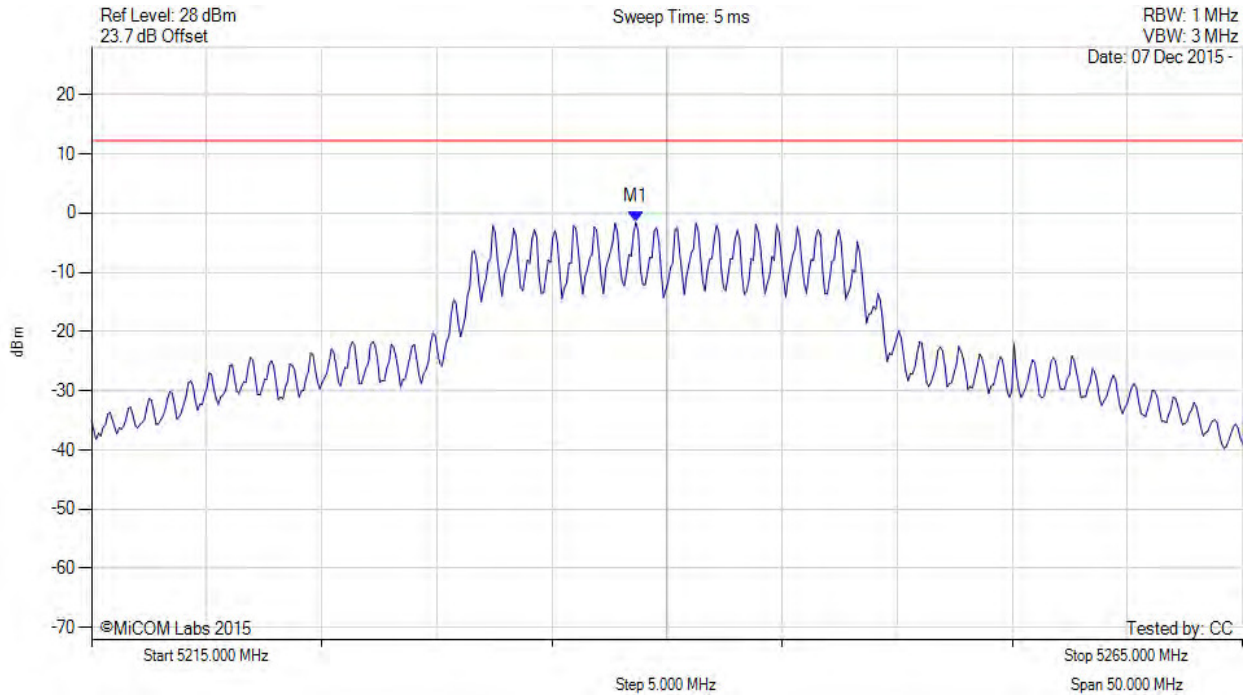

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5238.647 MHz : -1.526 dBm	Limit: ≤ 12.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 250 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5240.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

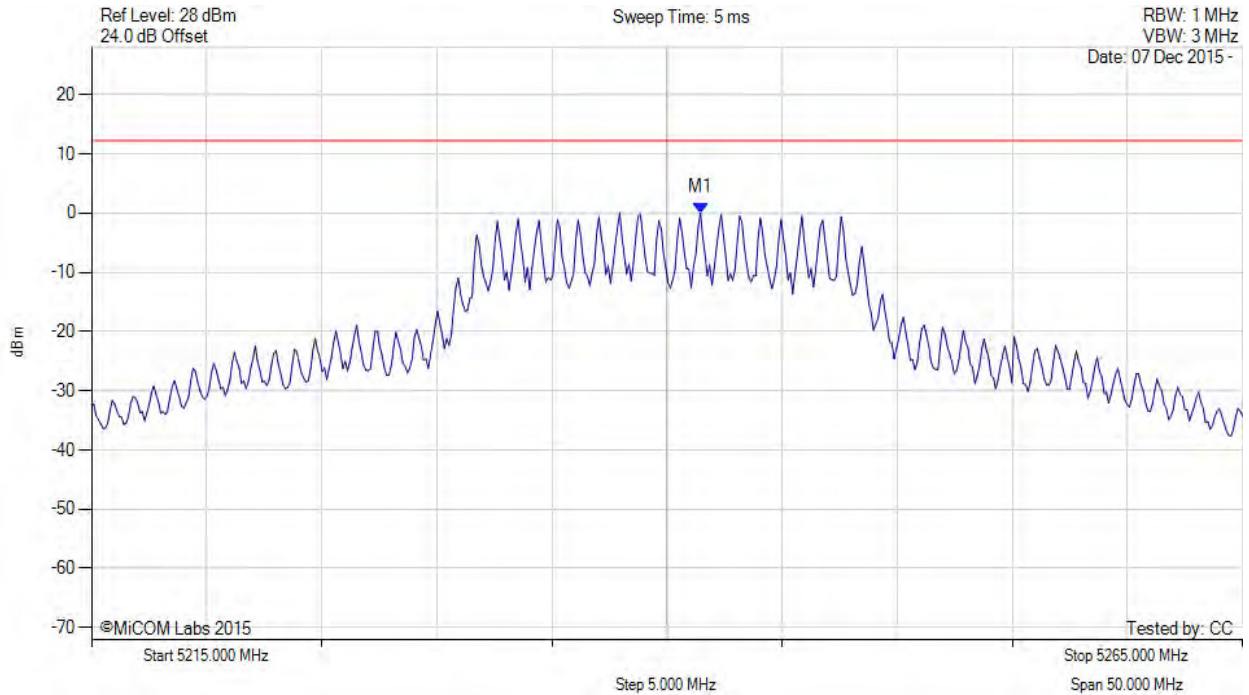

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5241.453 MHz : 0.048 dBm	Limit: ≤ 12.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 251 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5240.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

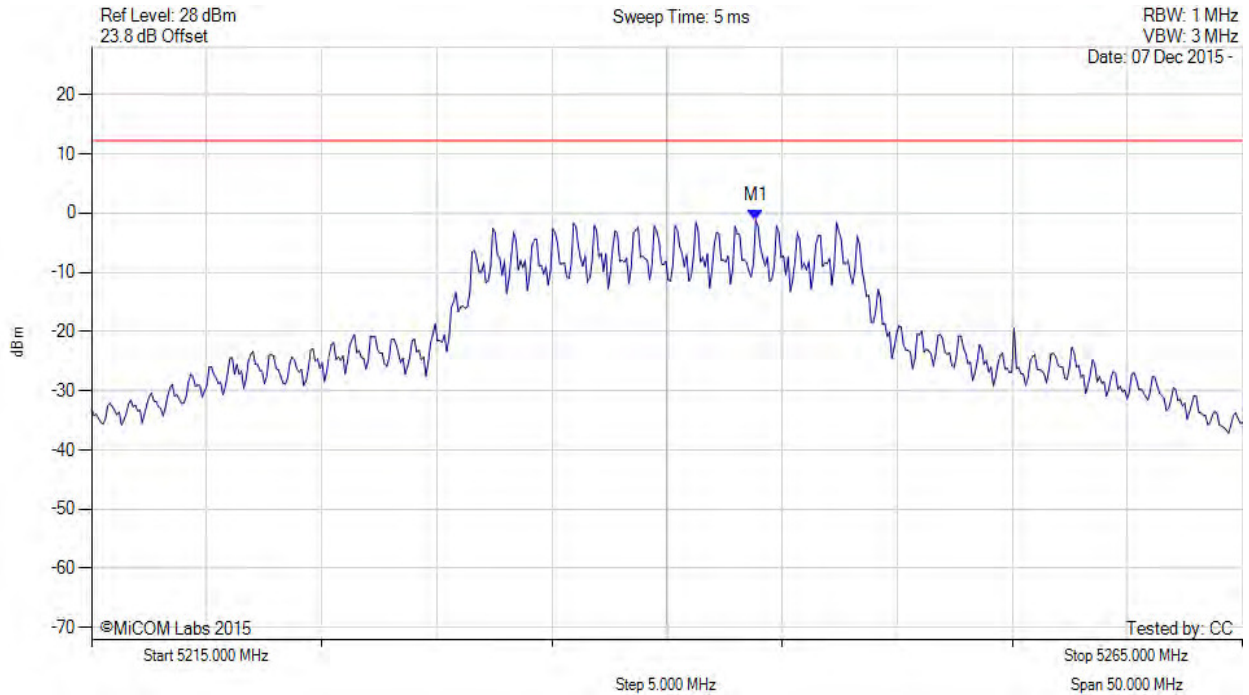

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5243.858 MHz : -1.220 dBm	Limit: ≤ 12.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 252 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5240.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc

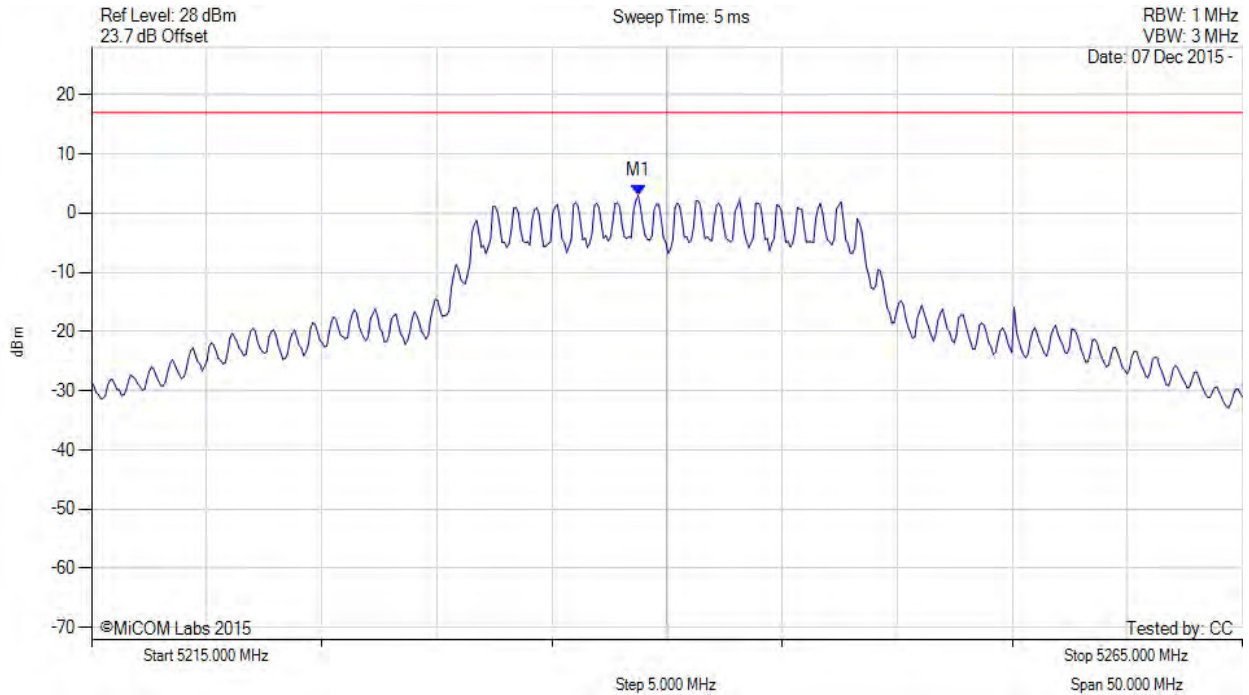

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5238.700 MHz : 2.954 dBm M1 + DCCF : 5238.700 MHz : 3.316 dBm Duty Cycle Correction Factor : +0.36 dB	Limit: ≤ 17.0 dBm Margin: -13.7 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 253 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5190.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

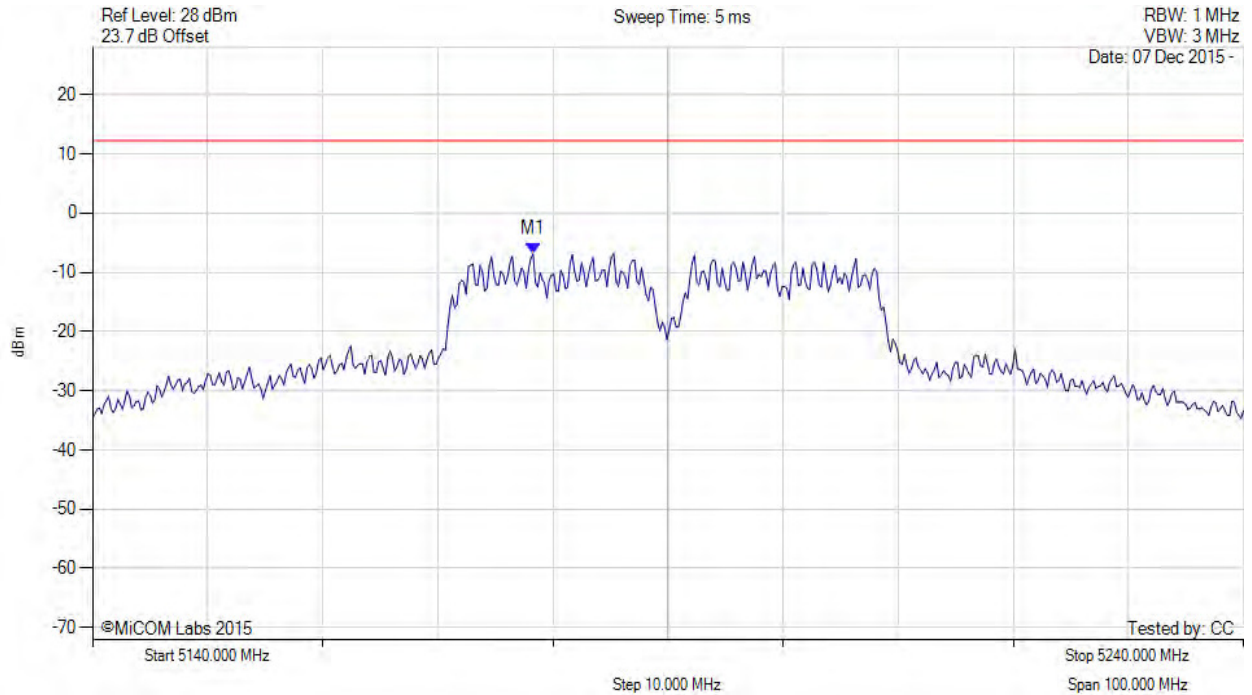

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5178.277 MHz : -6.853 dBm	Limit: ≤ 12.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 254 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5190.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

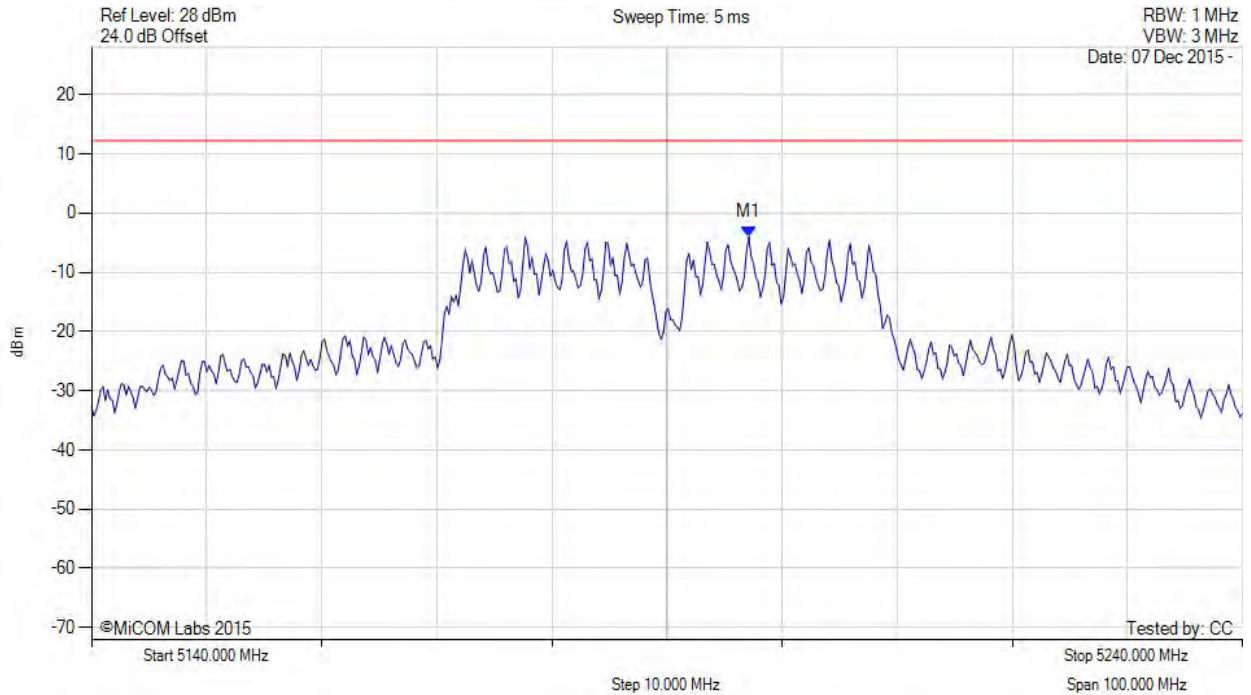

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5197.114 MHz : -4.006 dBm	Limit: ≤ 12.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 255 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5190.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

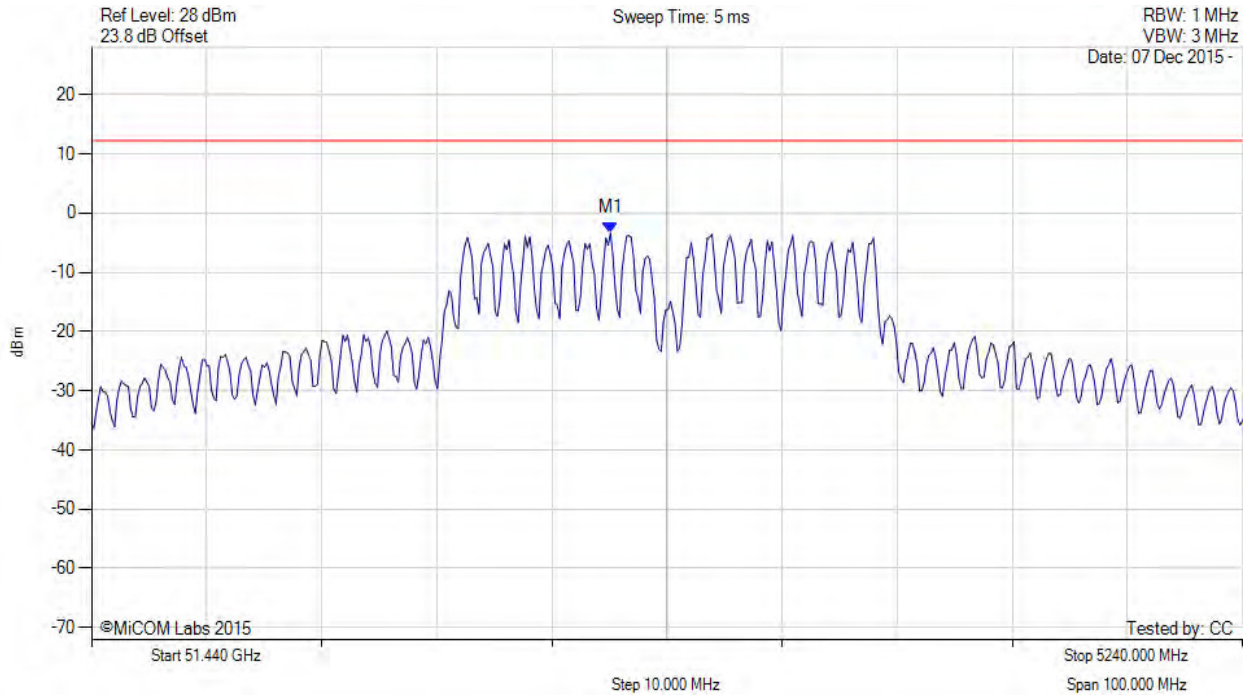

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5185.090 MHz : -3.380 dBm	Limit: ≤ 12.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 256 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5190.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc

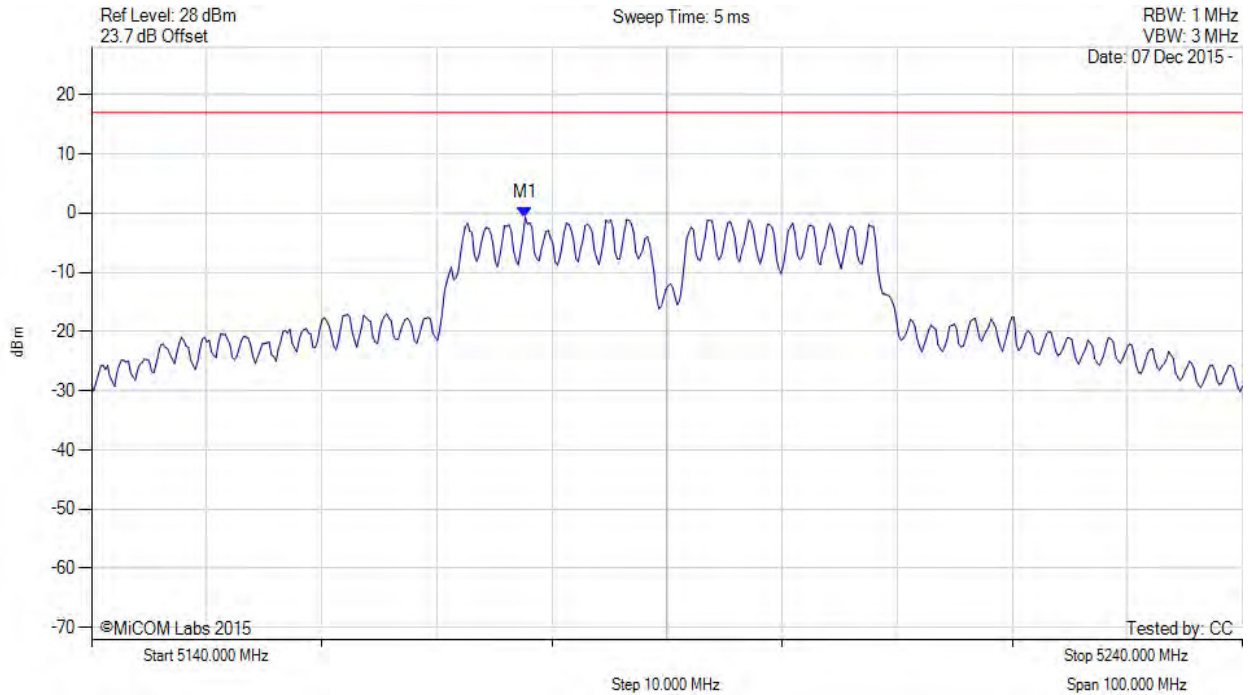

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5177.700 MHz : -0.680 dBm M1 + DCCF : 5177.700 MHz : 1.916 dBm Duty Cycle Correction Factor : +2.6 dB	Limit: ≤ 17.0 dBm Margin: -15.1 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 257 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5230.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

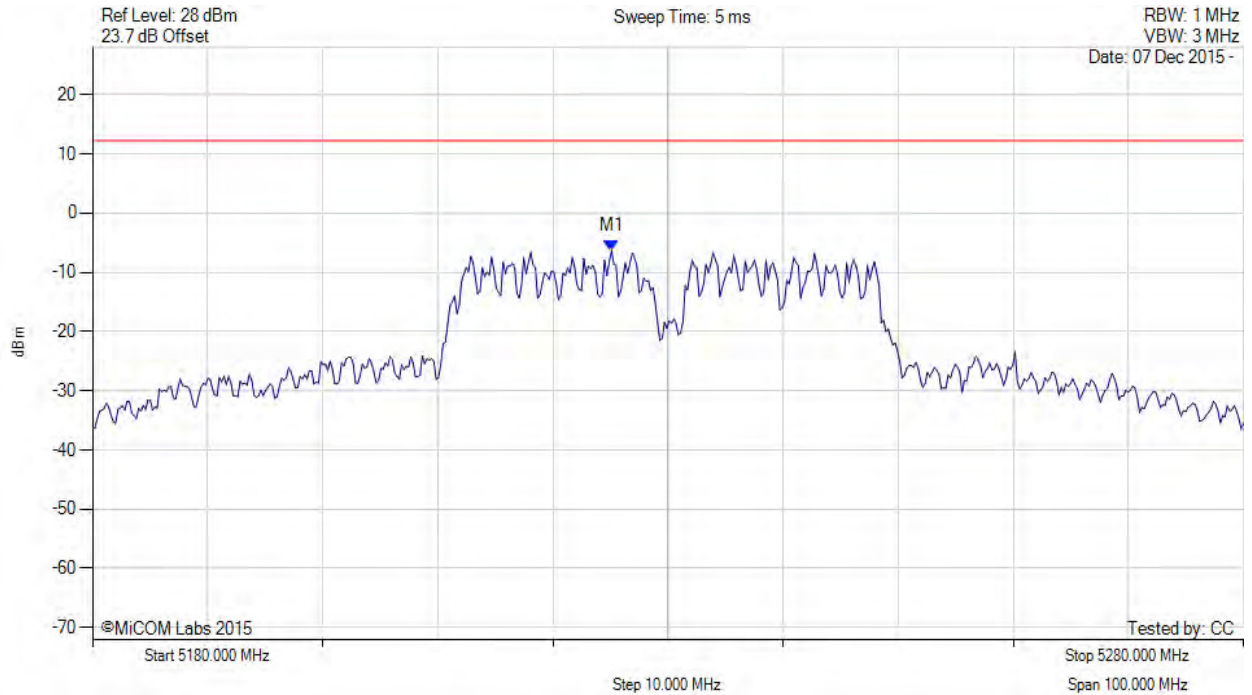

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5225.090 MHz : -6.409 dBm	Limit: ≤ 12.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 258 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5230.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

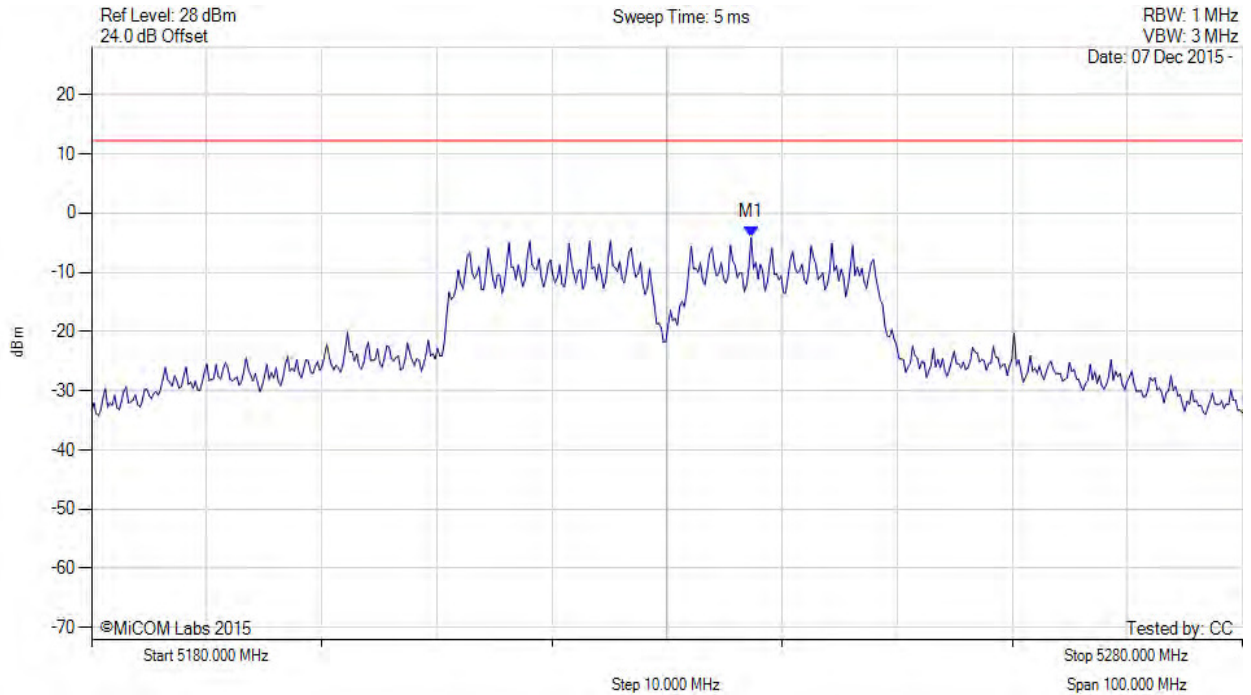

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5237.315 MHz : -4.130 dBm	Limit: ≤ 12.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 259 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5230.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

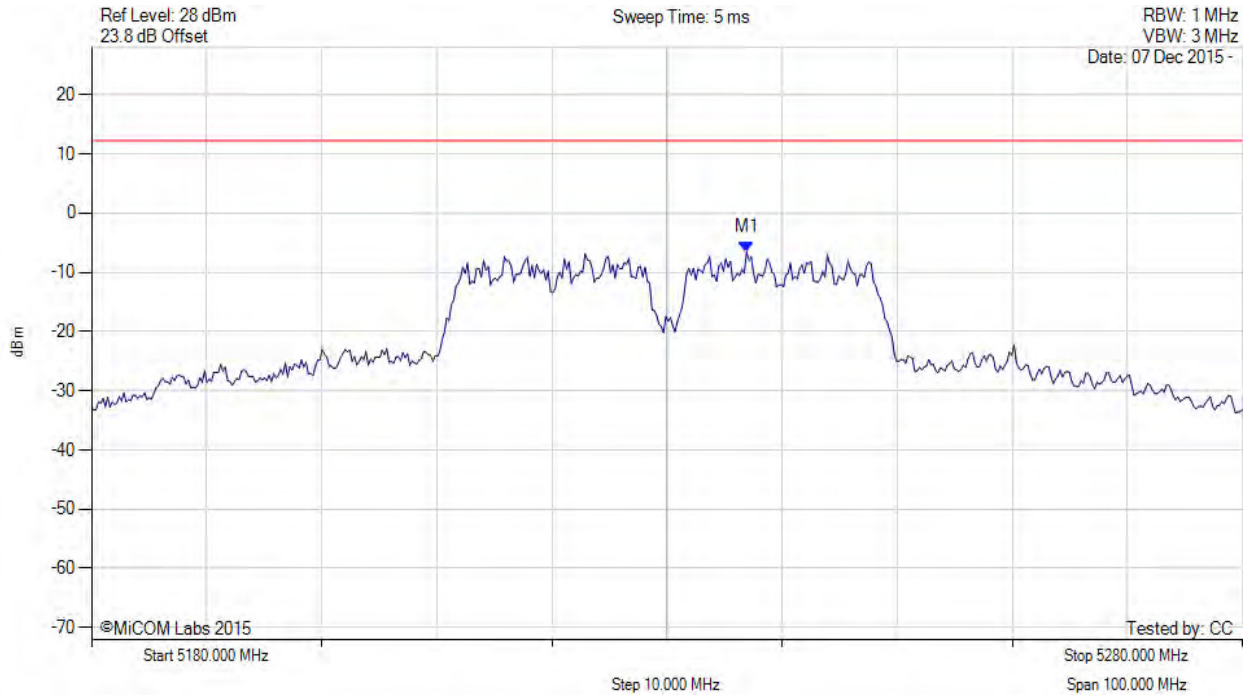

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5236.914 MHz : -6.566 dBm	Limit: ≤ 12.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 260 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5230.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc

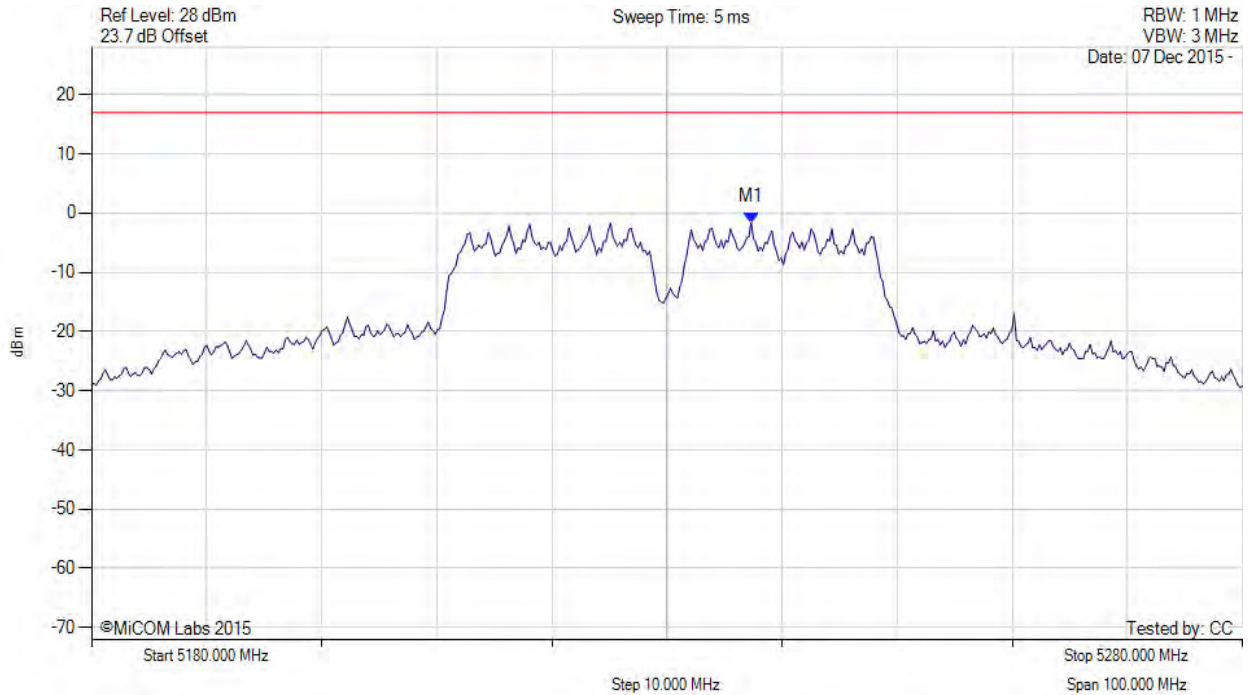

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5237.300 MHz : -1.591 dBm M1 + DCCF : 5237.300 MHz : 1.005 dBm Duty Cycle Correction Factor : +2.6 dB	Limit: ≤ 17.0 dBm Margin: -16.0 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 261 of 405

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5745.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

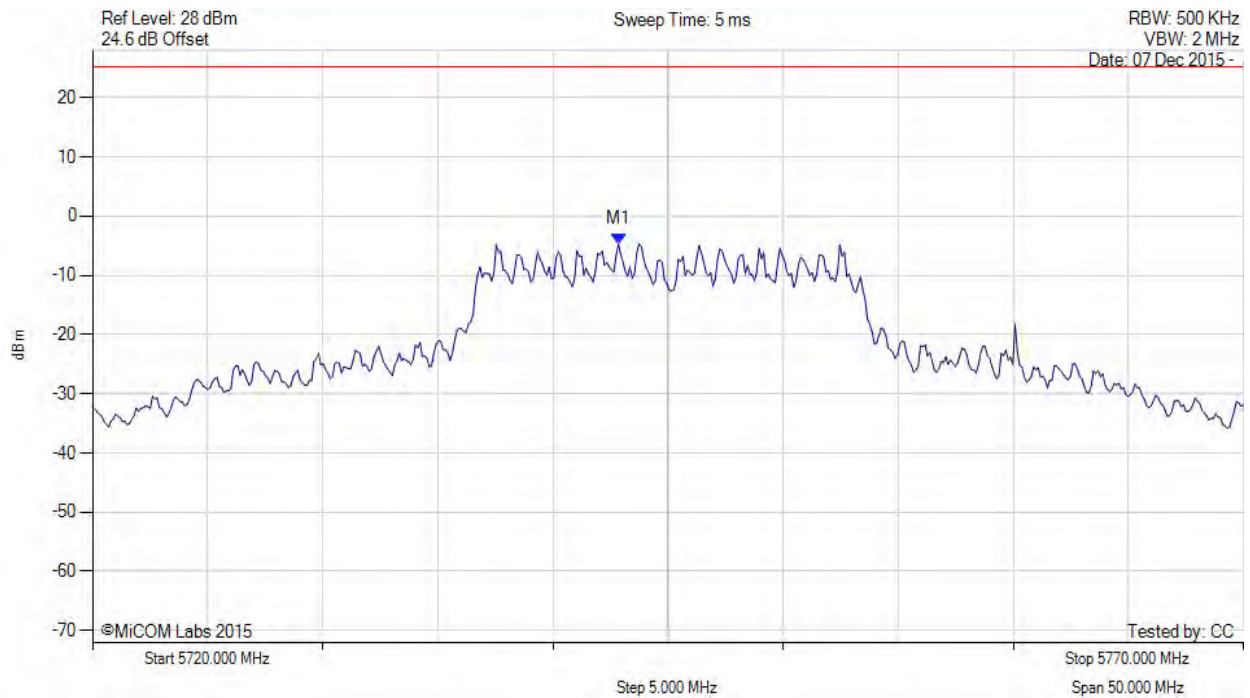

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5742.846 MHz : -4.666 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 262 of 405

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5745.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

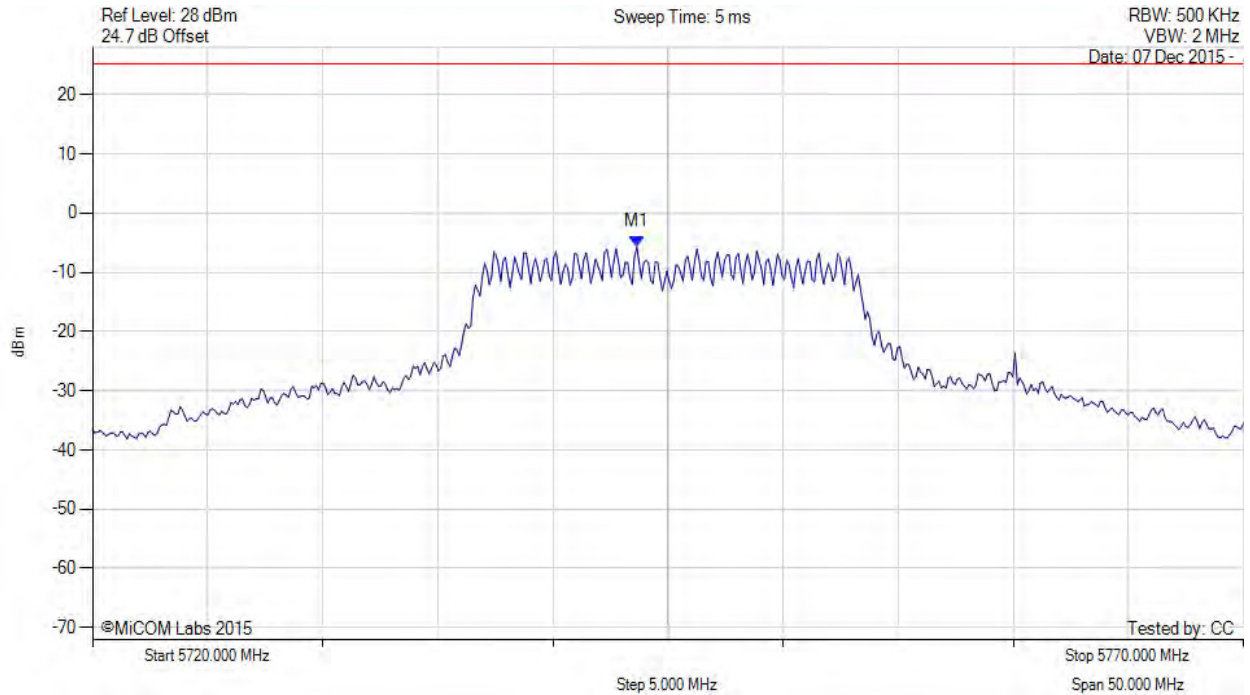

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5743.647 MHz : -5.692 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 263 of 405

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5745.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

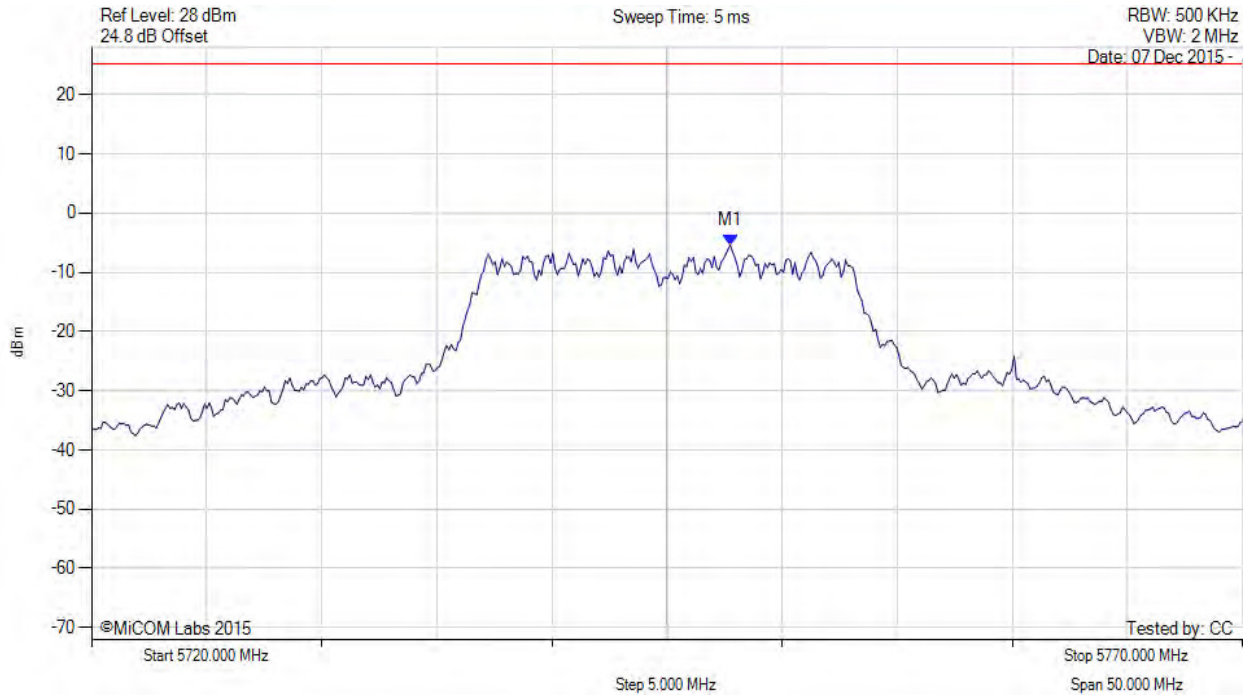

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5747.756 MHz : -5.391 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 264 of 405

POWER SPECTRAL DENSITY



Variants: 802.11a, Channel: 5745.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc

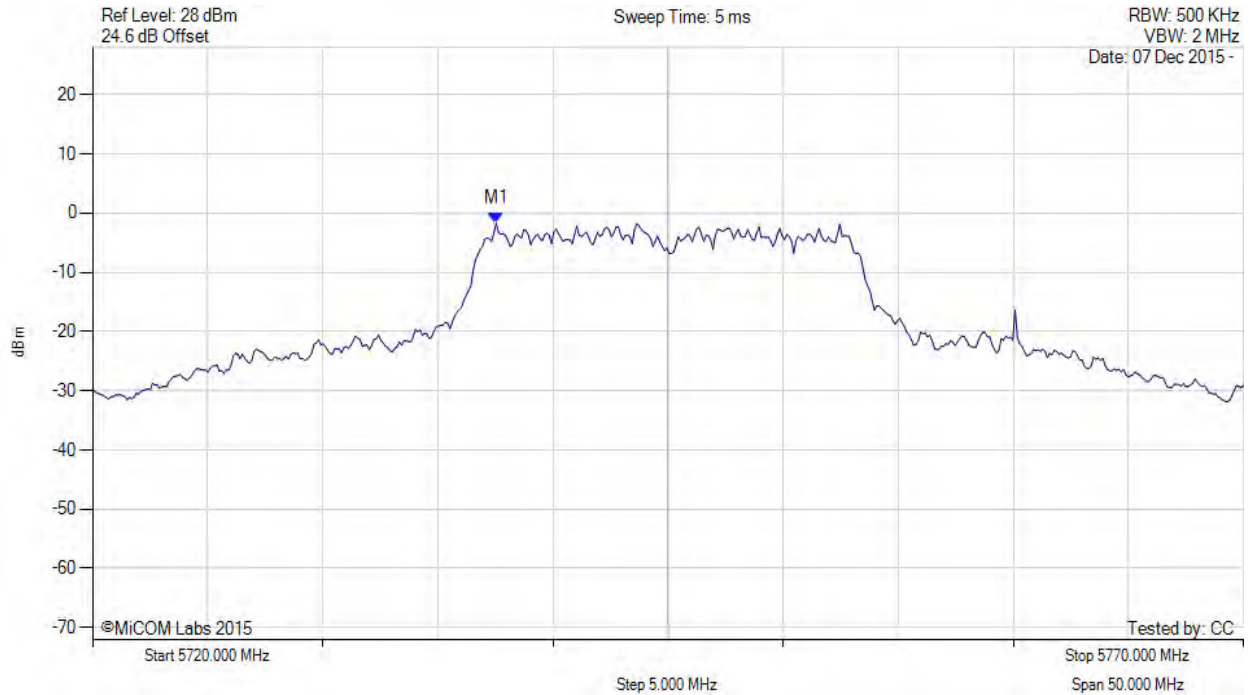

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5737.500 MHz : -1.750 dBm M1 + DCCF : 5737.500 MHz : 0.846 dBm Duty Cycle Correction Factor : +2.6 dB	Limit: ≤ 30.0 dBm Margin: -29.1 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 265 of 405

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5785.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

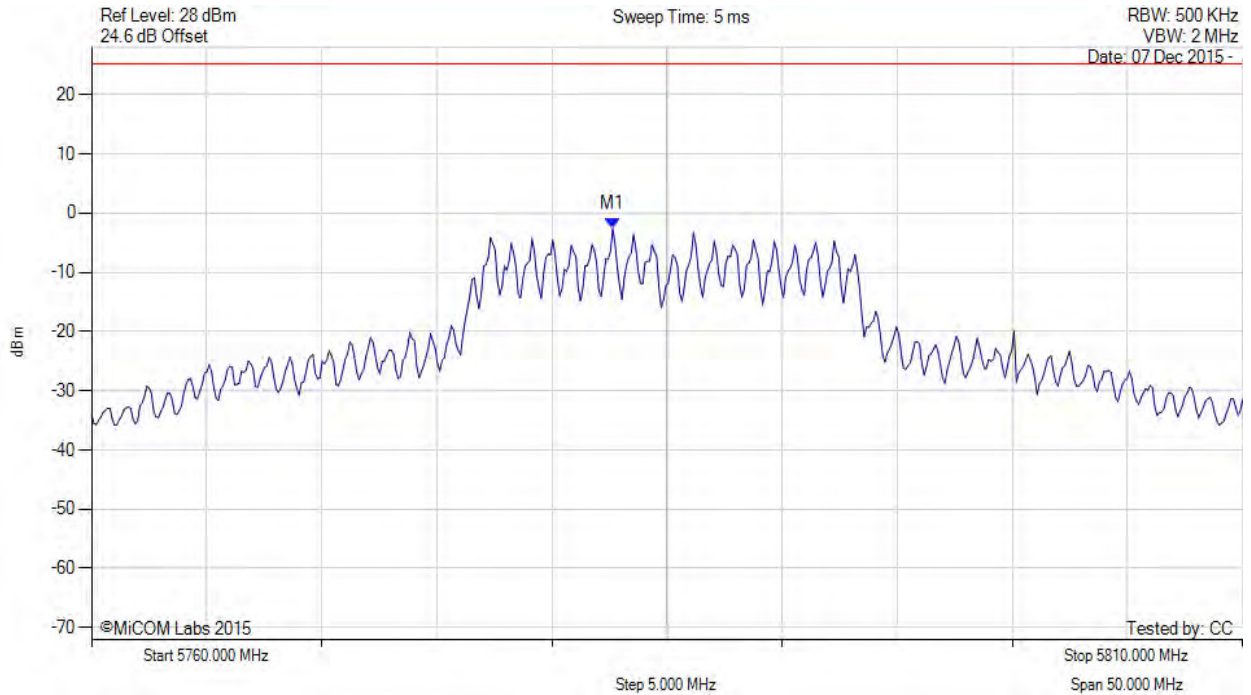

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5782.645 MHz : -2.652 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5785.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

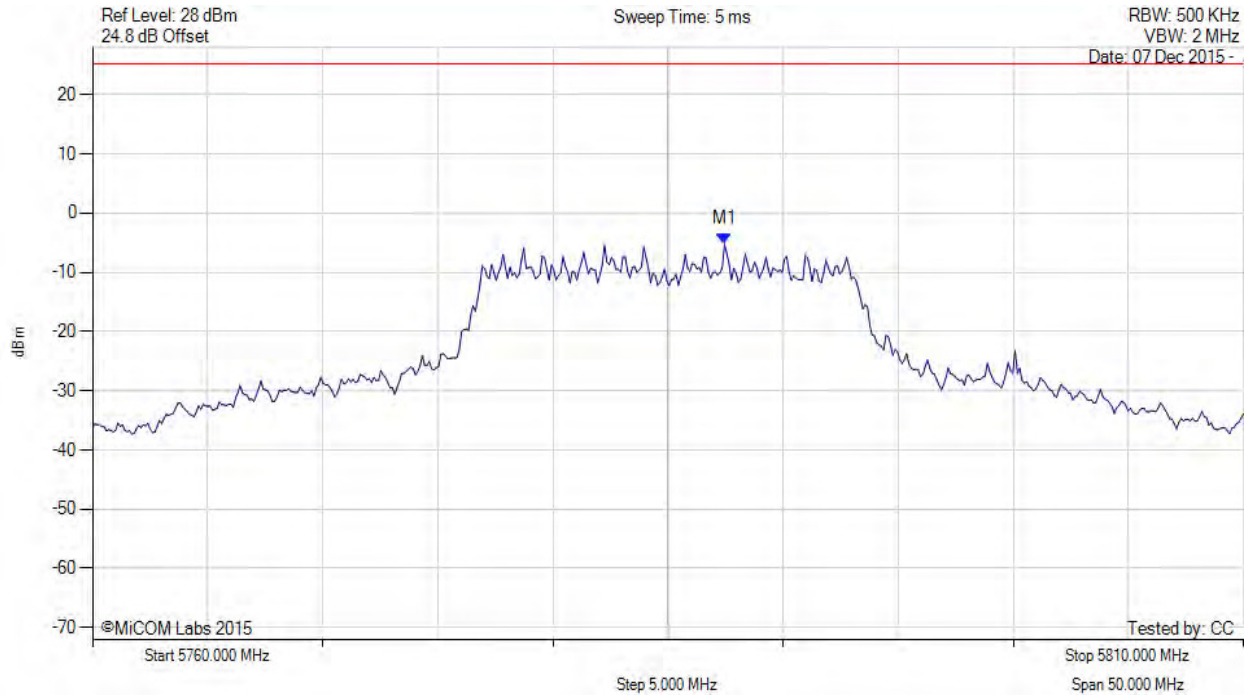

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5787.455 MHz : -5.231 dBm	Channel Frequency: 5785.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 267 of 405

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5785.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

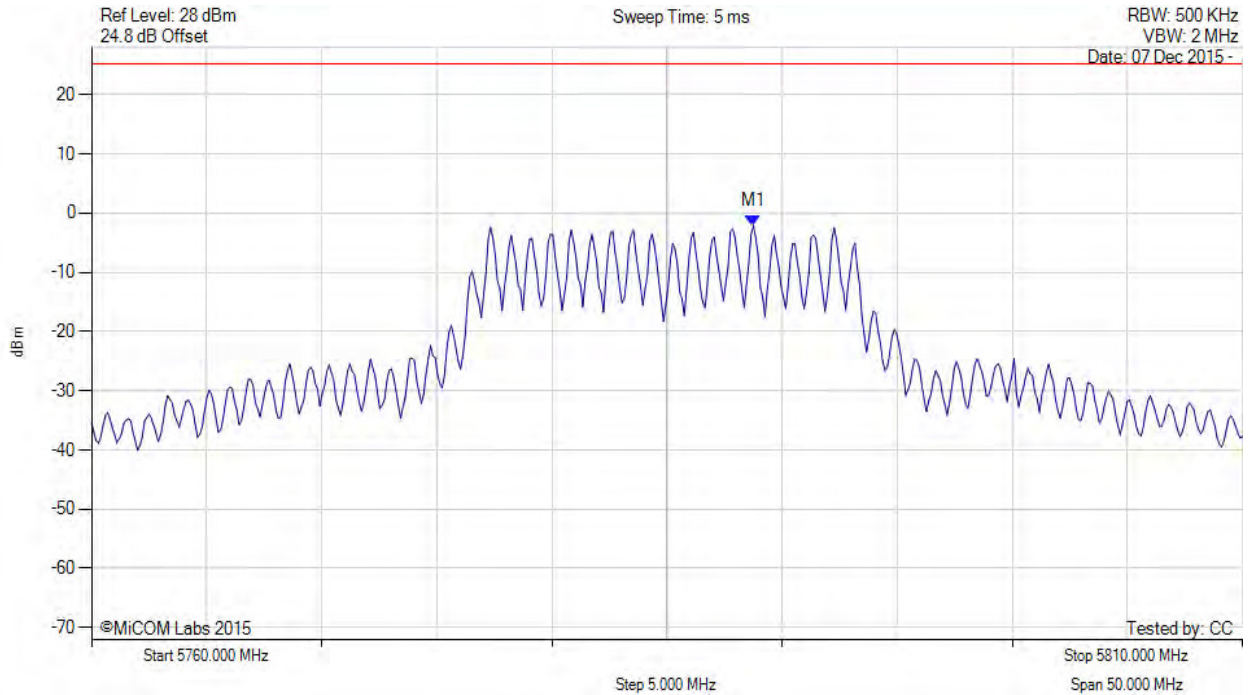

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5788.758 MHz : -2.123 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 268 of 405

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5785.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc

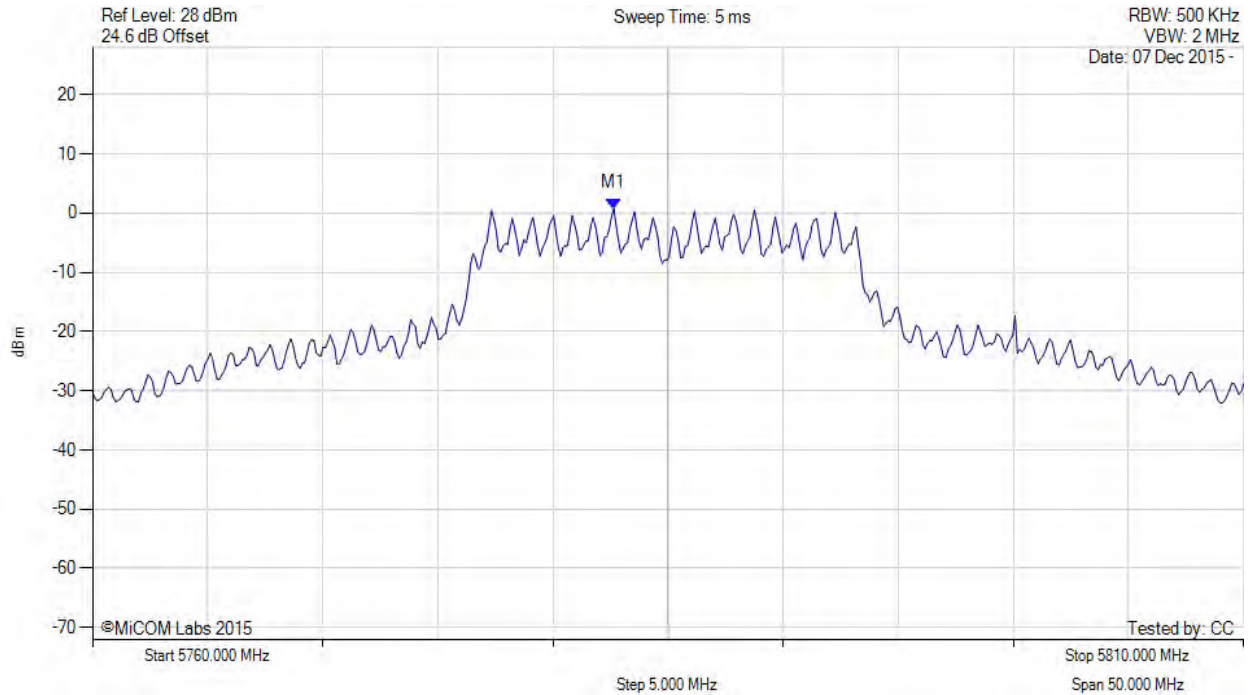

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5782.600 MHz : 0.751 dBm M1 + DCCF : 5782.600 MHz : 3.347 dBm Duty Cycle Correction Factor : +2.6 dB	Limit: ≤ 30.0 dBm Margin: -26.6 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 269 of 405

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5825.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

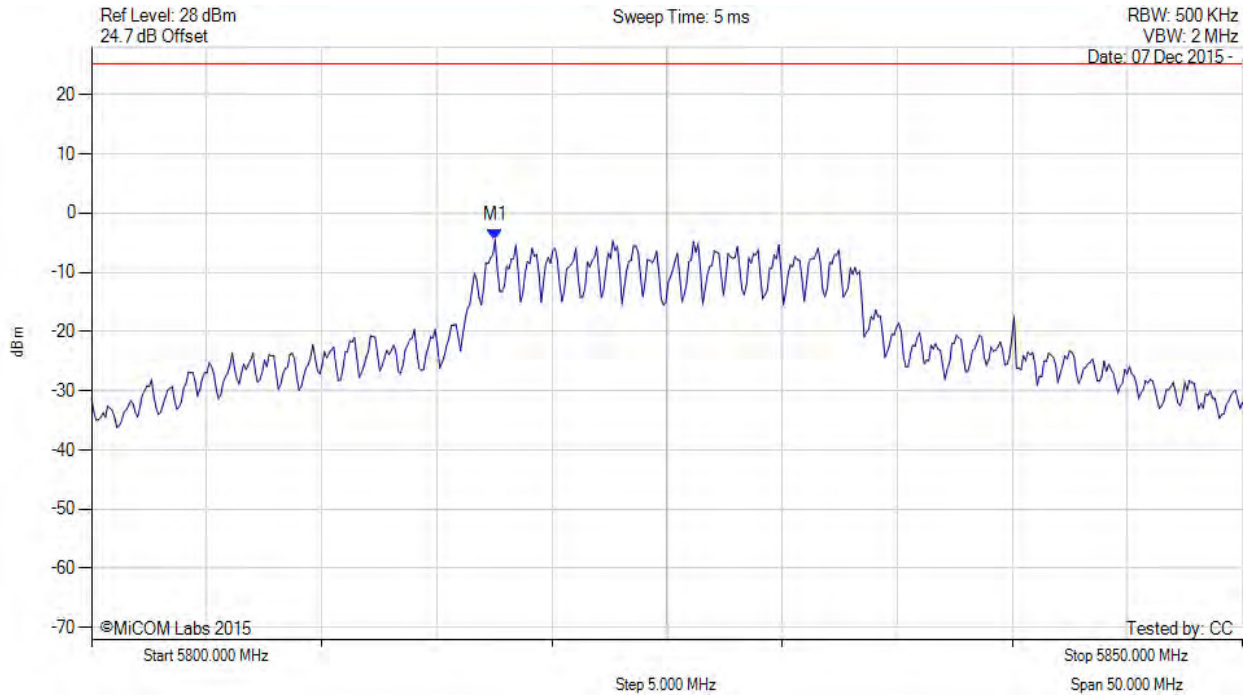

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5817.535 MHz : -4.529 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5825.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

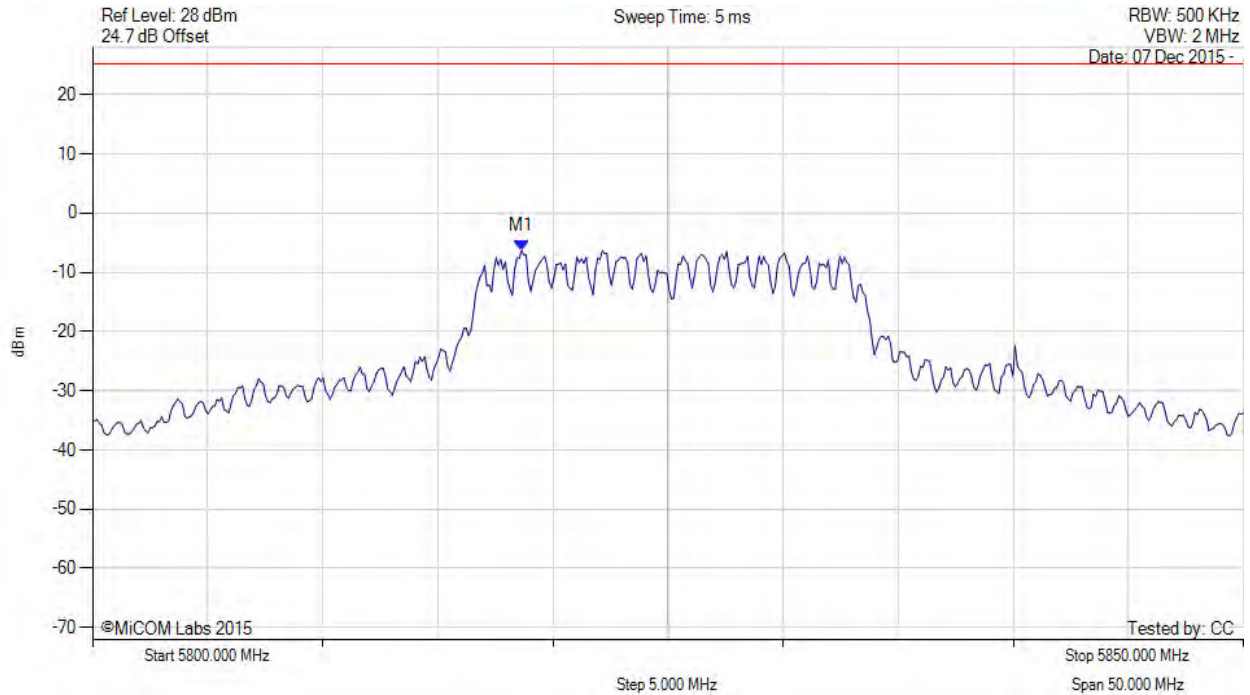

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5818.637 MHz : -6.367 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 271 of 405

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5825.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

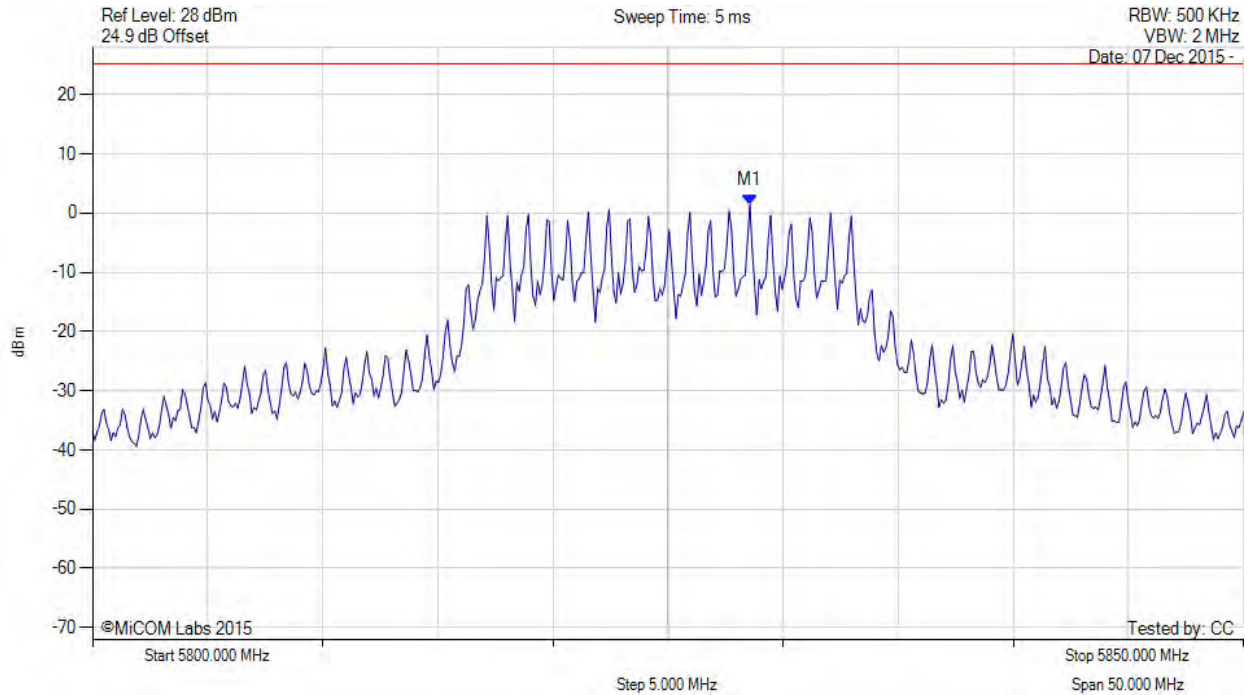

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5828.557 MHz : 1.334 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 272 of 405

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5825.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc

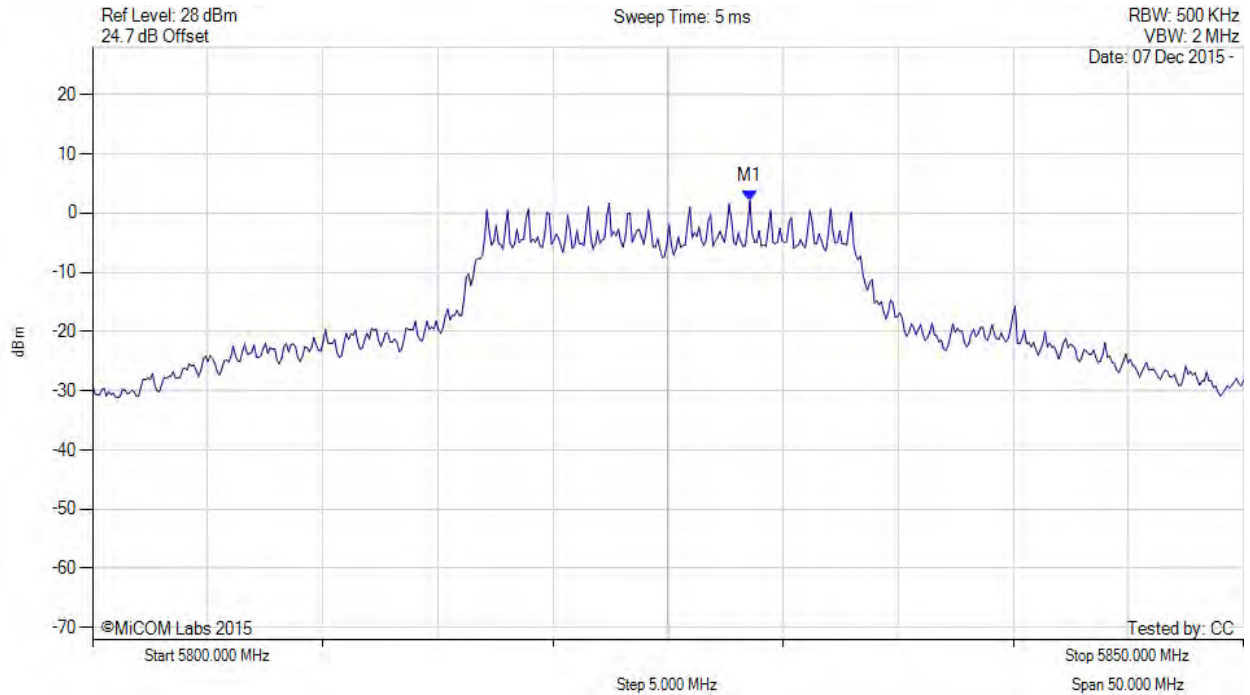

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5828.600 MHz : 2.081 dBm M1 + DCCF : 5828.600 MHz : 4.677 dBm Duty Cycle Correction Factor : +2.6 dB	Limit: ≤ 30.0 dBm Margin: -25.3 dB

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY



Variante: 802.11ac-80, Channel: 5775.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

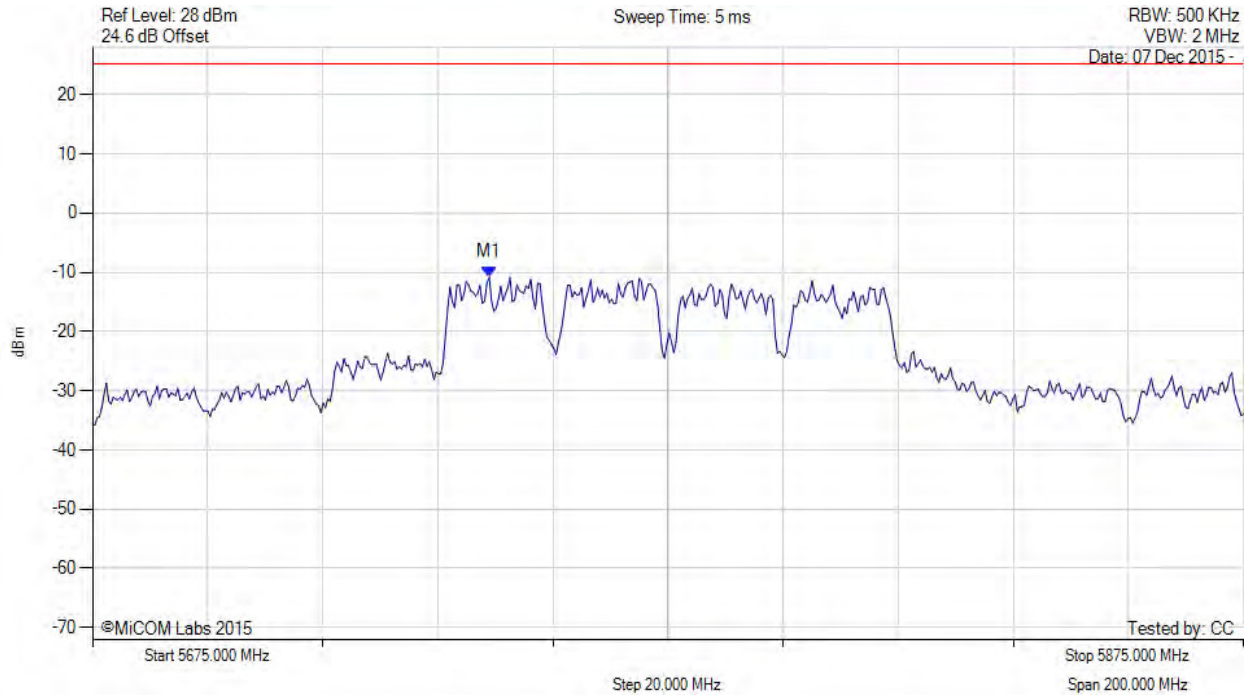

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5743.938 MHz : -10.830 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 274 of 405

POWER SPECTRAL DENSITY



Variante: 802.11ac-80, Channel: 5775.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

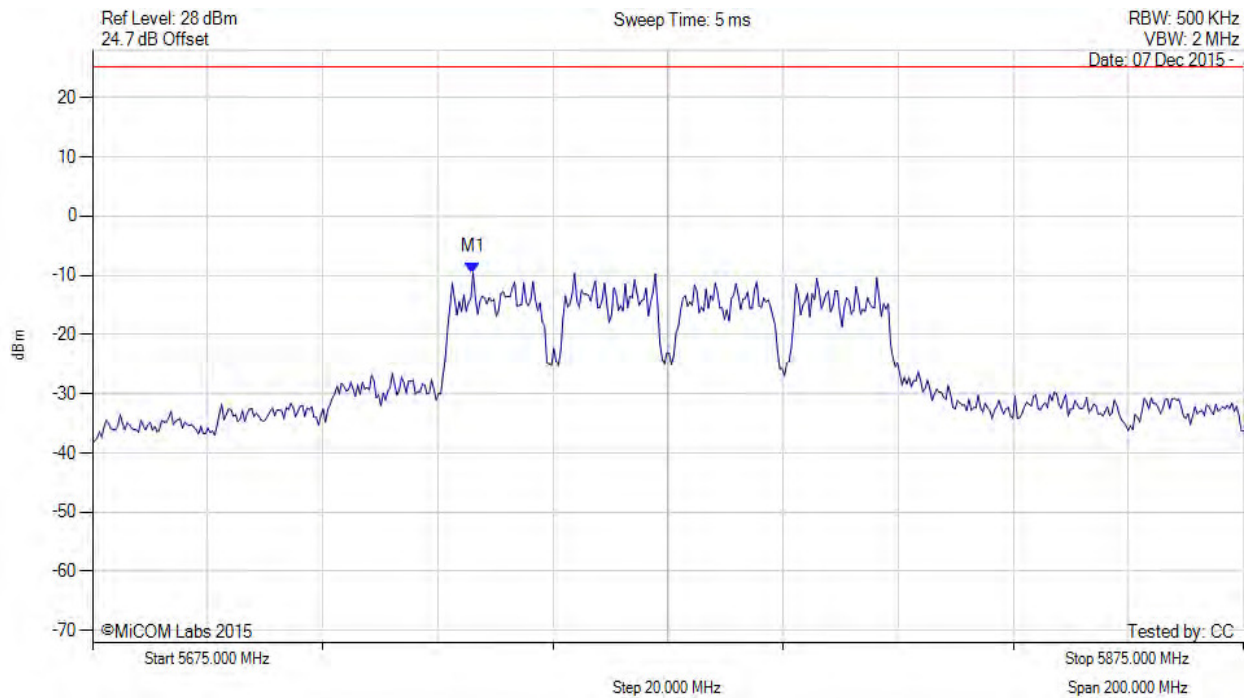

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5741.132 MHz : -9.552 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY



Variante: 802.11ac-80, Channel: 5775.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

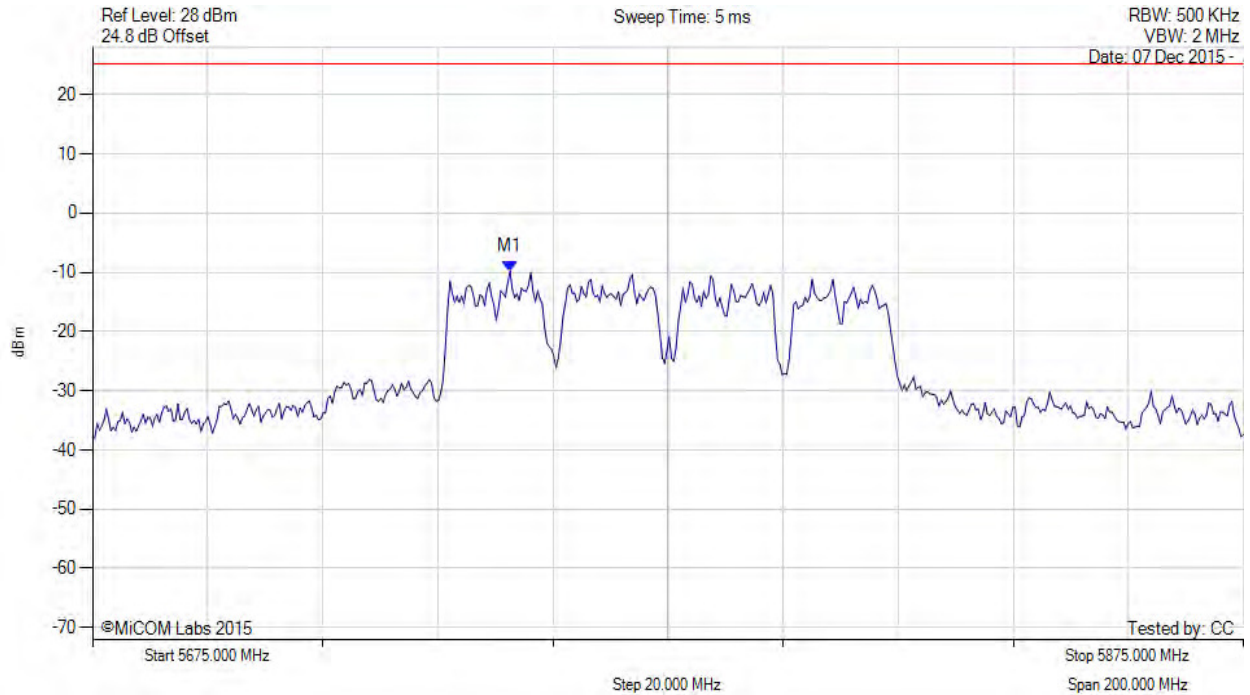

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5747.545 MHz : -9.824 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 276 of 405

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5775.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc

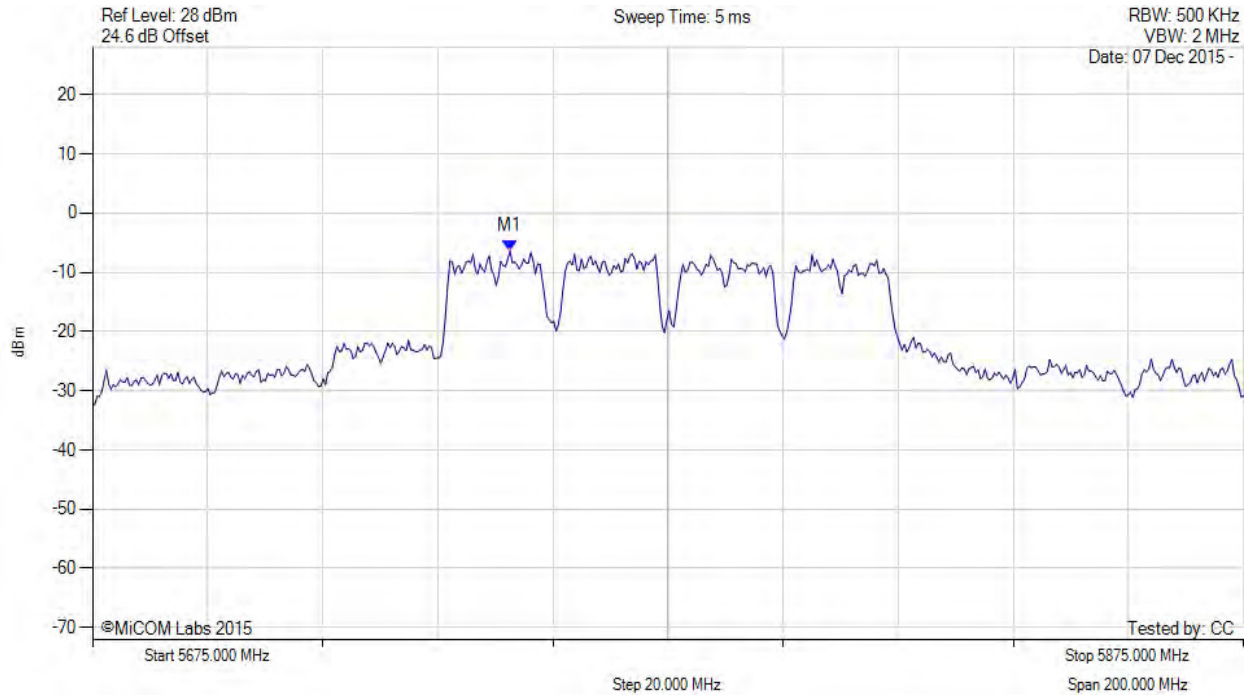

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5747.500 MHz : -6.389 dBm M1 + DCCF : 5747.500 MHz : -4.313 dBm Duty Cycle Correction Factor : +2.08 dB	Limit: ≤ 30.0 dBm Margin: -34.3 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 277 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5745.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

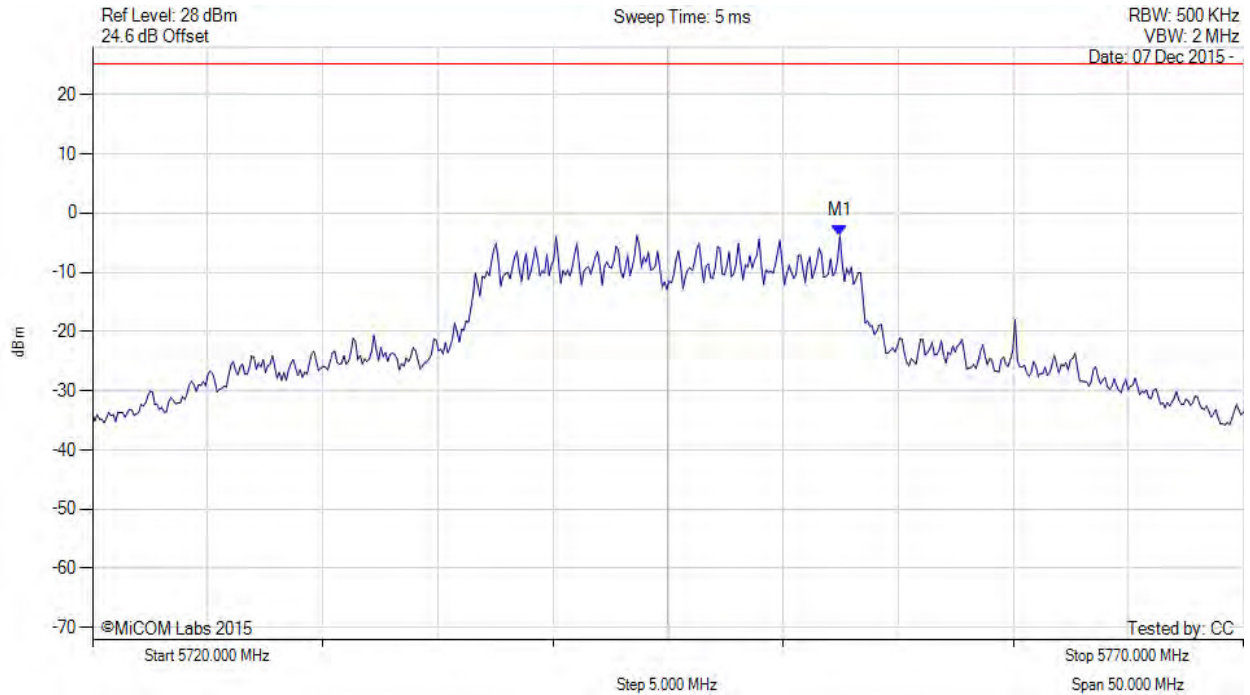

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5752.465 MHz : -3.845 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5745.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

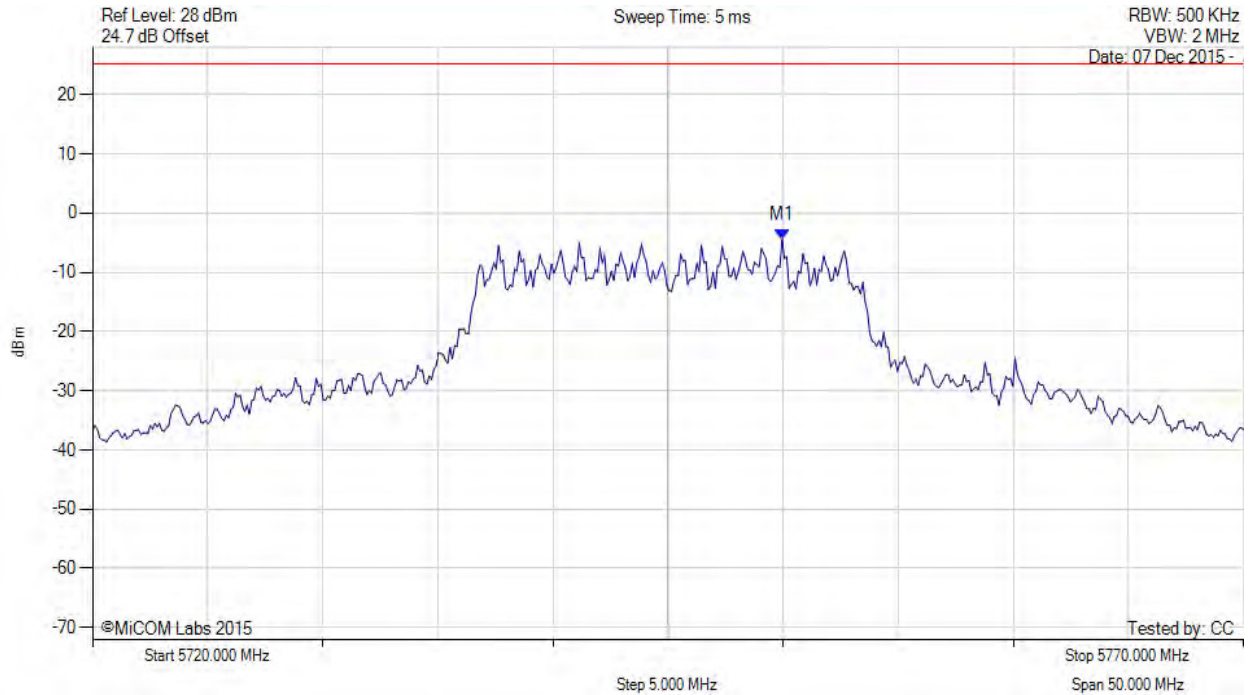

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5749.960 MHz : -4.440 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 279 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5745.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

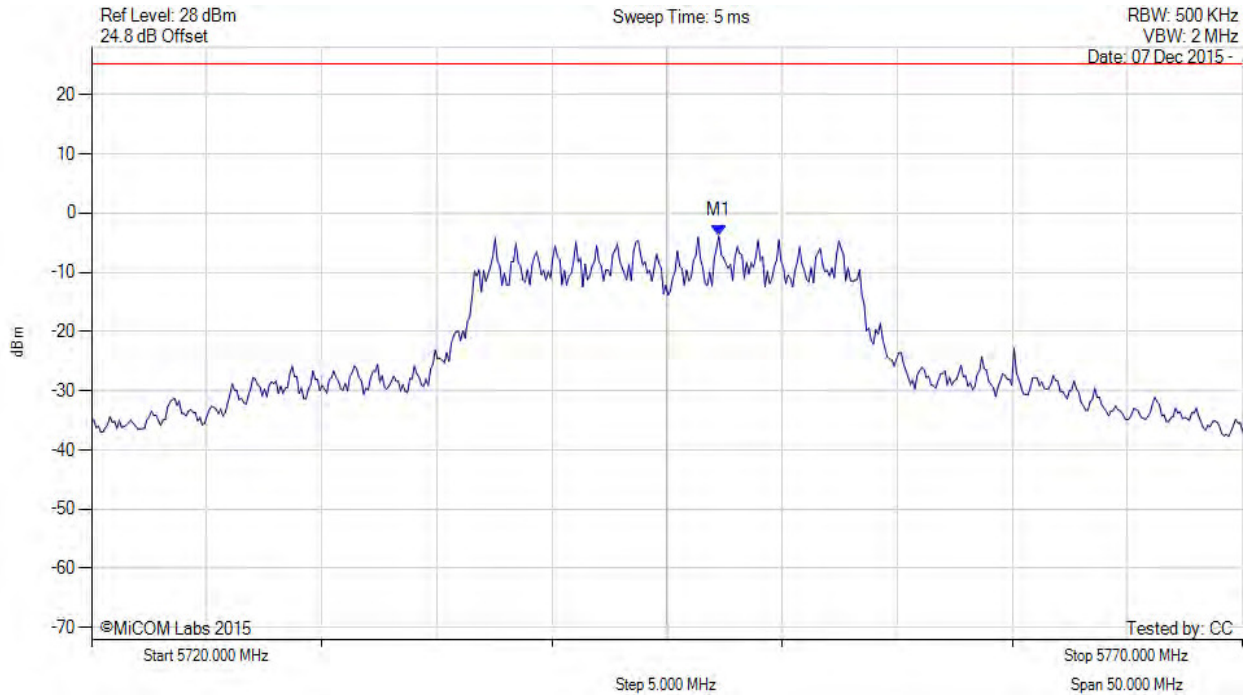

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5747.255 MHz : -3.857 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 280 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5745.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc

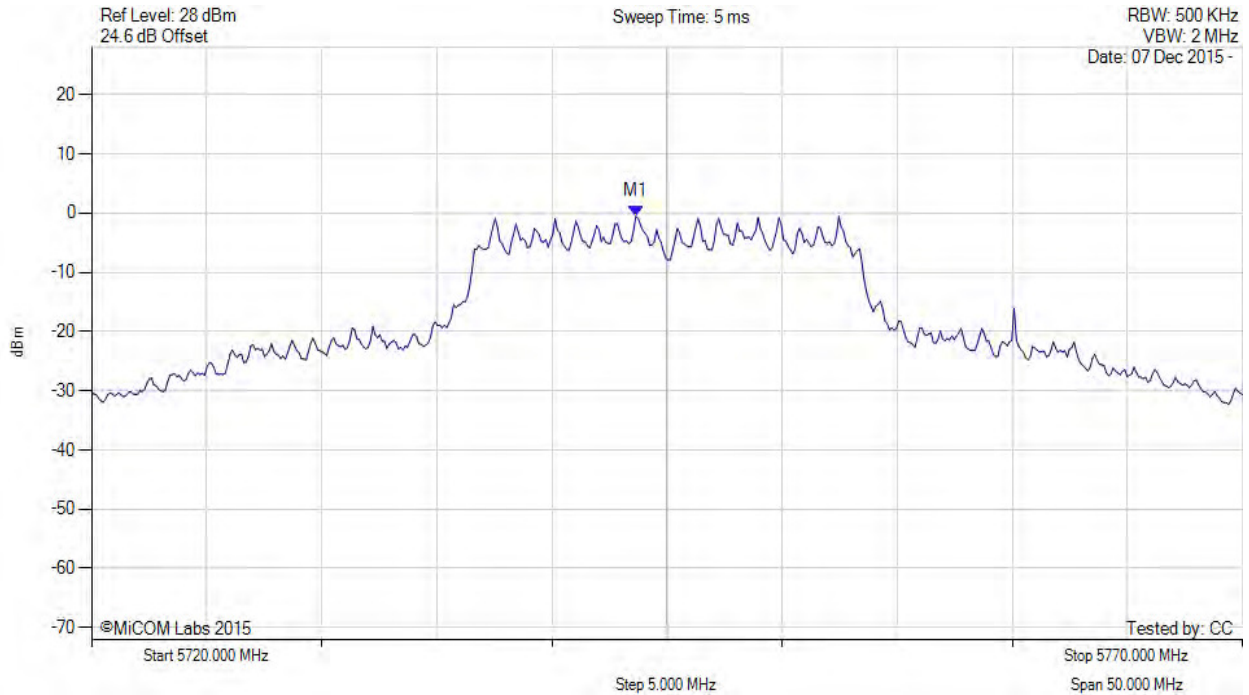

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5743.600 MHz : -0.539 dBm M1 + DCCF : 5743.600 MHz : -0.177 dBm Duty Cycle Correction Factor : +0.36 dB	Limit: ≤ 30.0 dBm Margin: -30.1 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 281 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5785.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

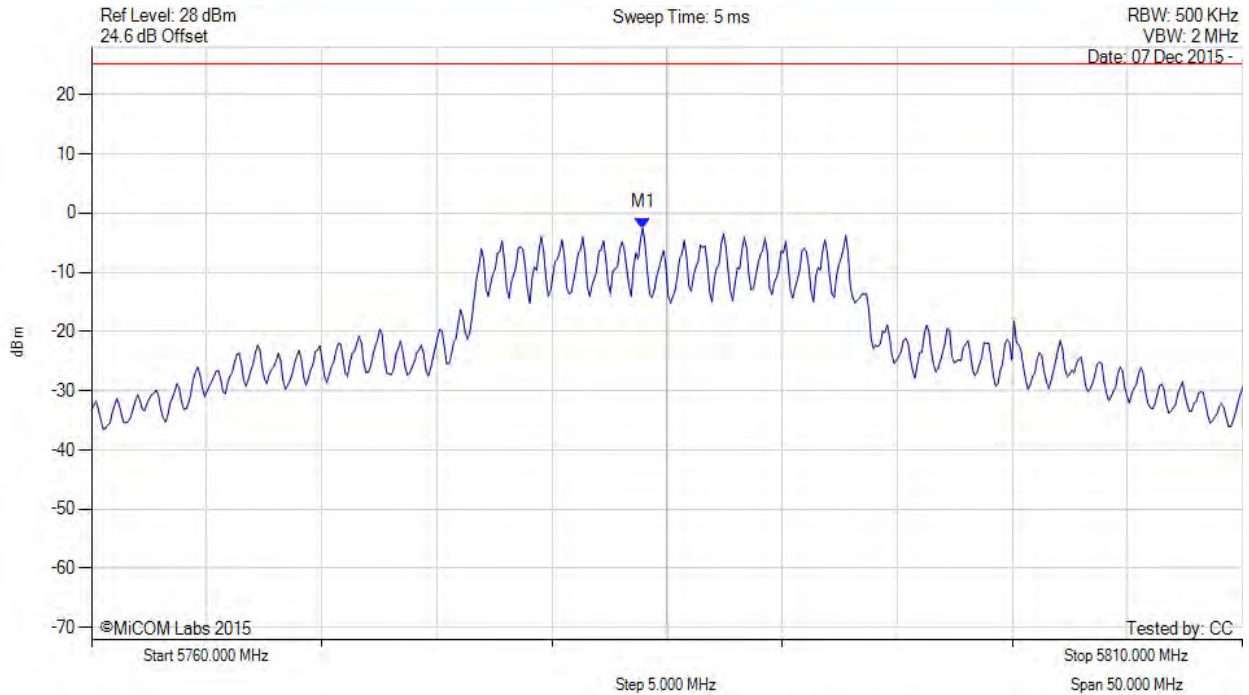

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5783.948 MHz : -2.540 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 282 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5785.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

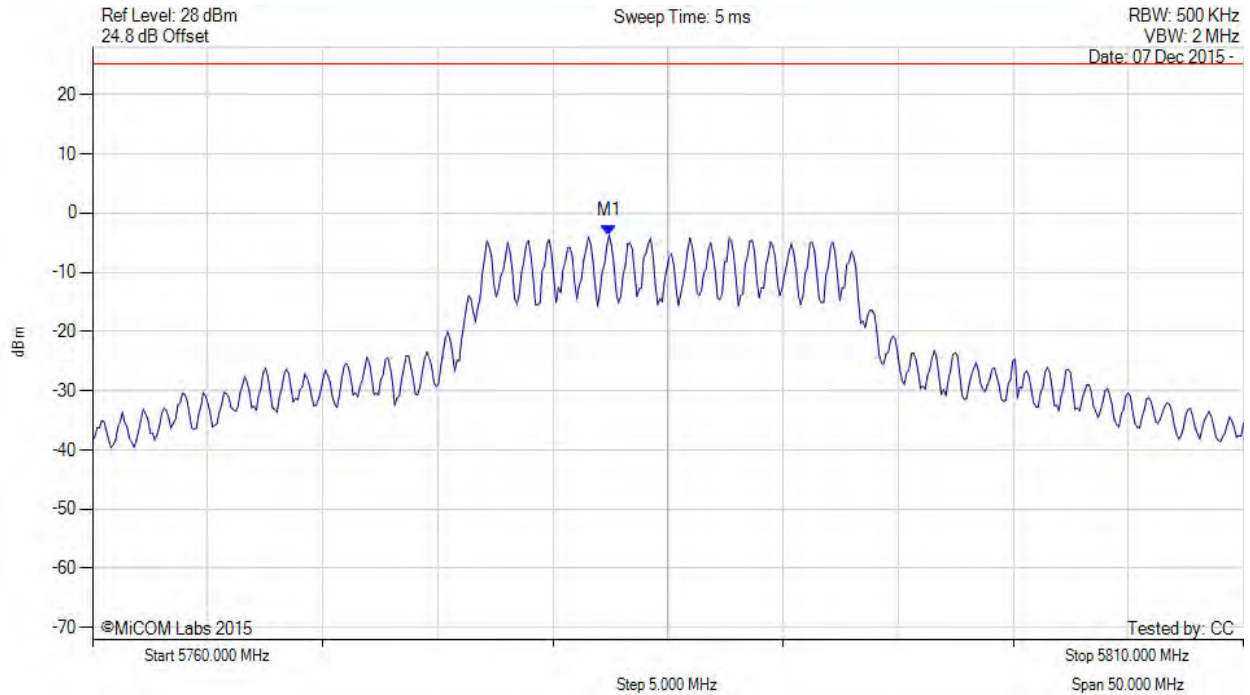

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5782.445 MHz : -3.783 dBm	Channel Frequency: 5785.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 283 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5785.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

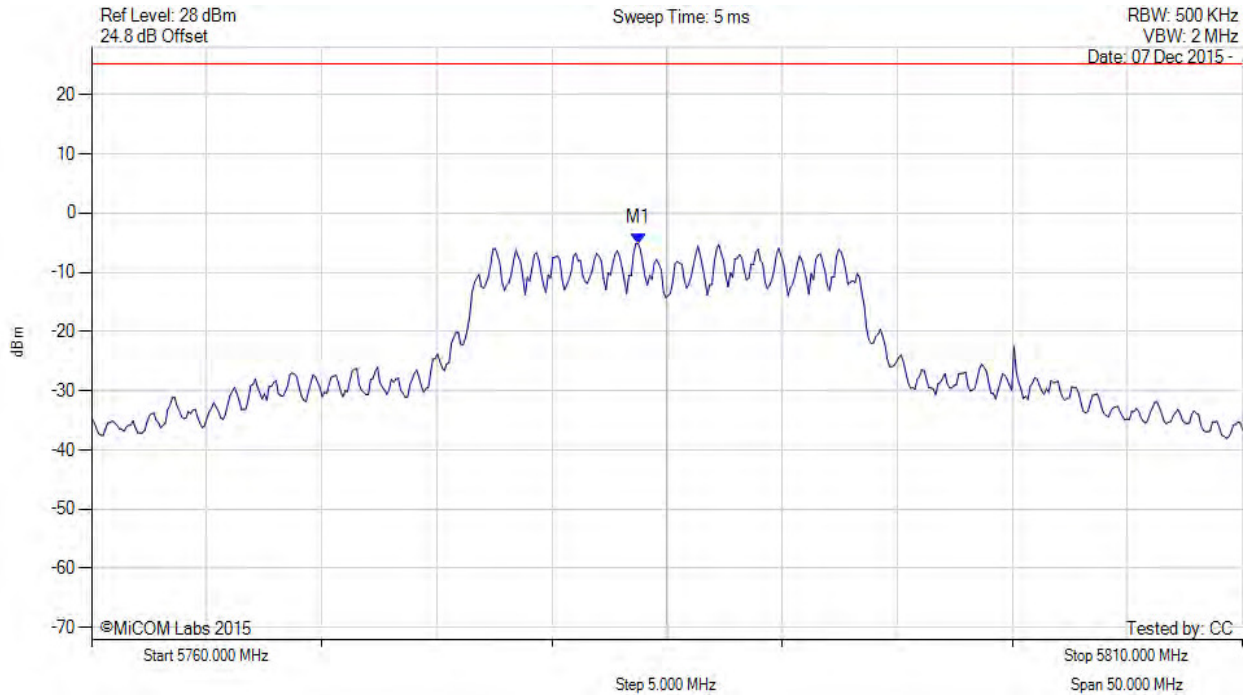

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5783.747 MHz : -5.101 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 284 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5785.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc

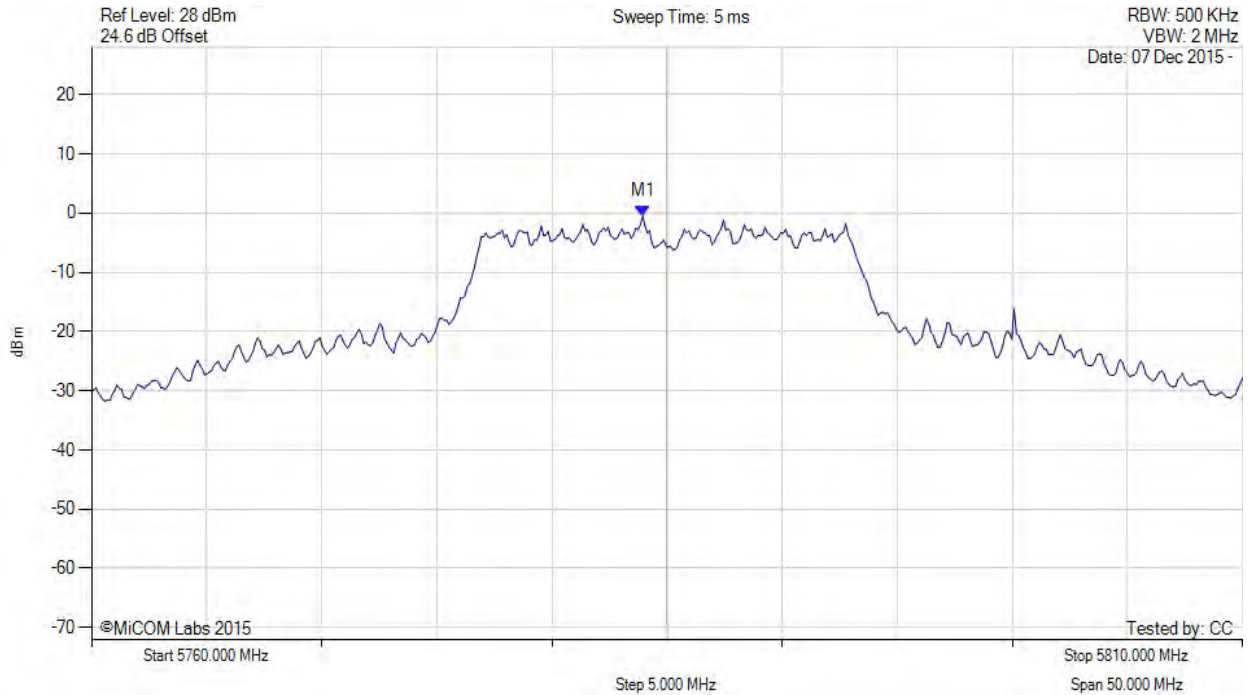

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5783.900 MHz : -0.515 dBm M1 + DCCF : 5783.900 MHz : -0.153 dBm Duty Cycle Correction Factor : +0.36 dB	Limit: ≤ 30.0 dBm Margin: -30.1 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 285 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5825.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

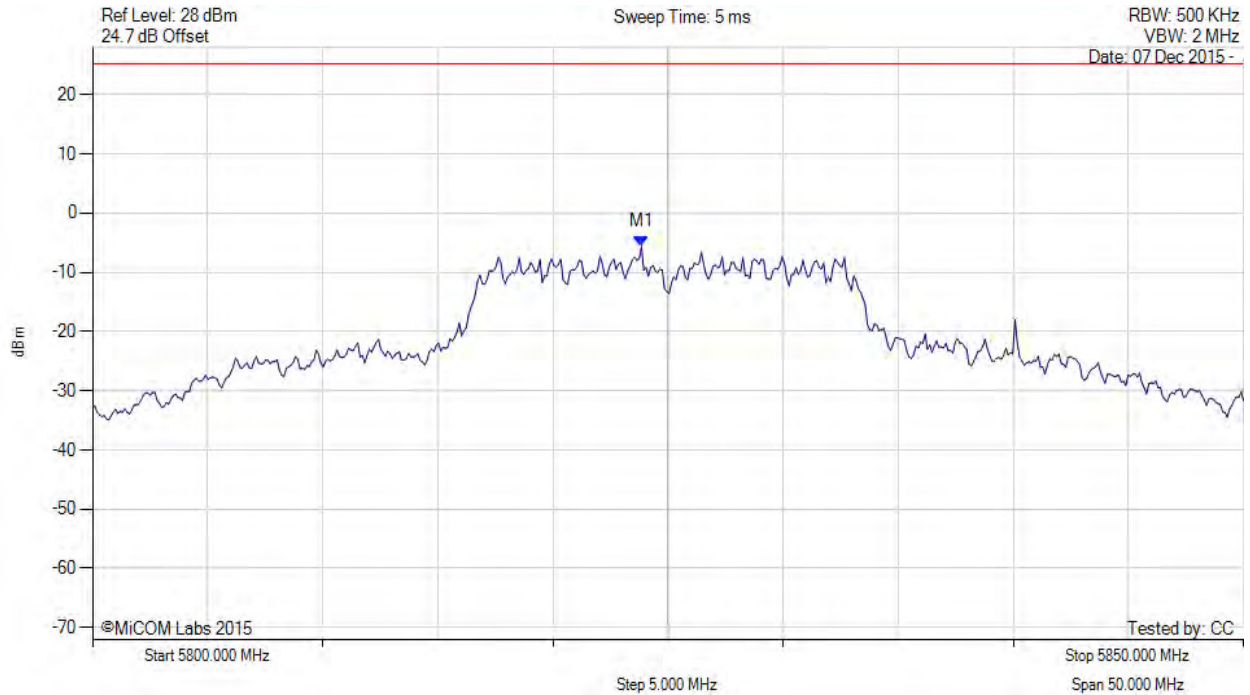

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5823.848 MHz : -5.629 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5825.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

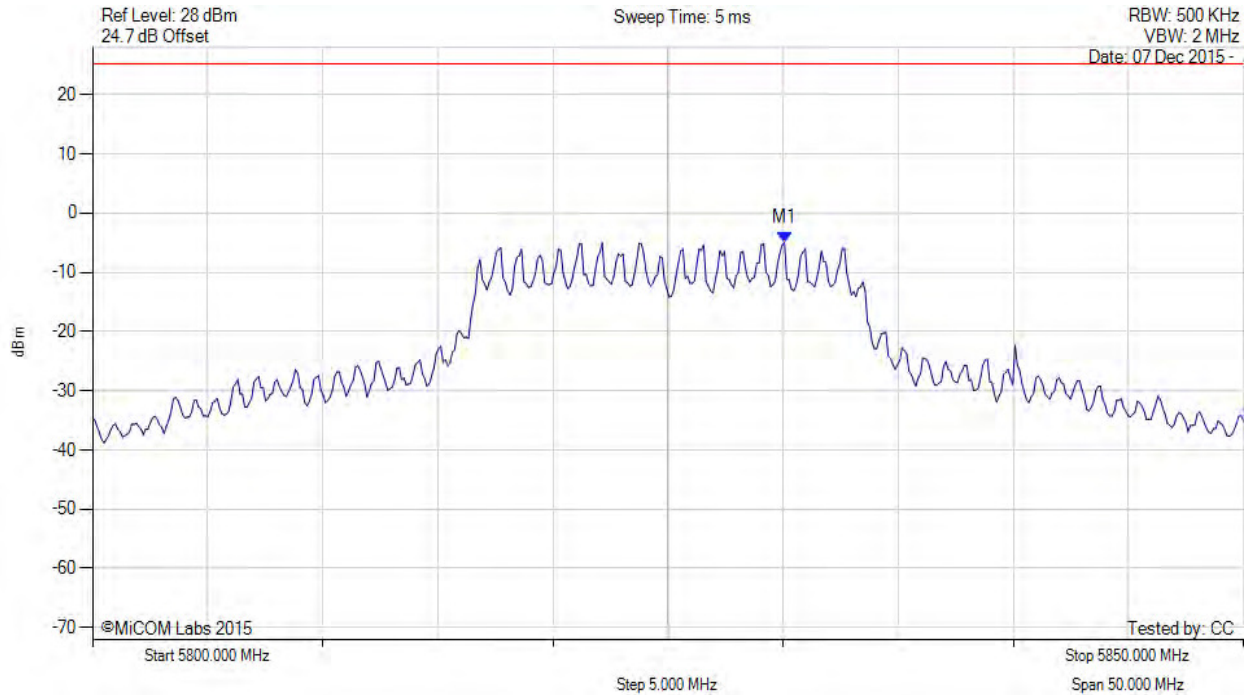

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5830.060 MHz : -4.970 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 287 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5825.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

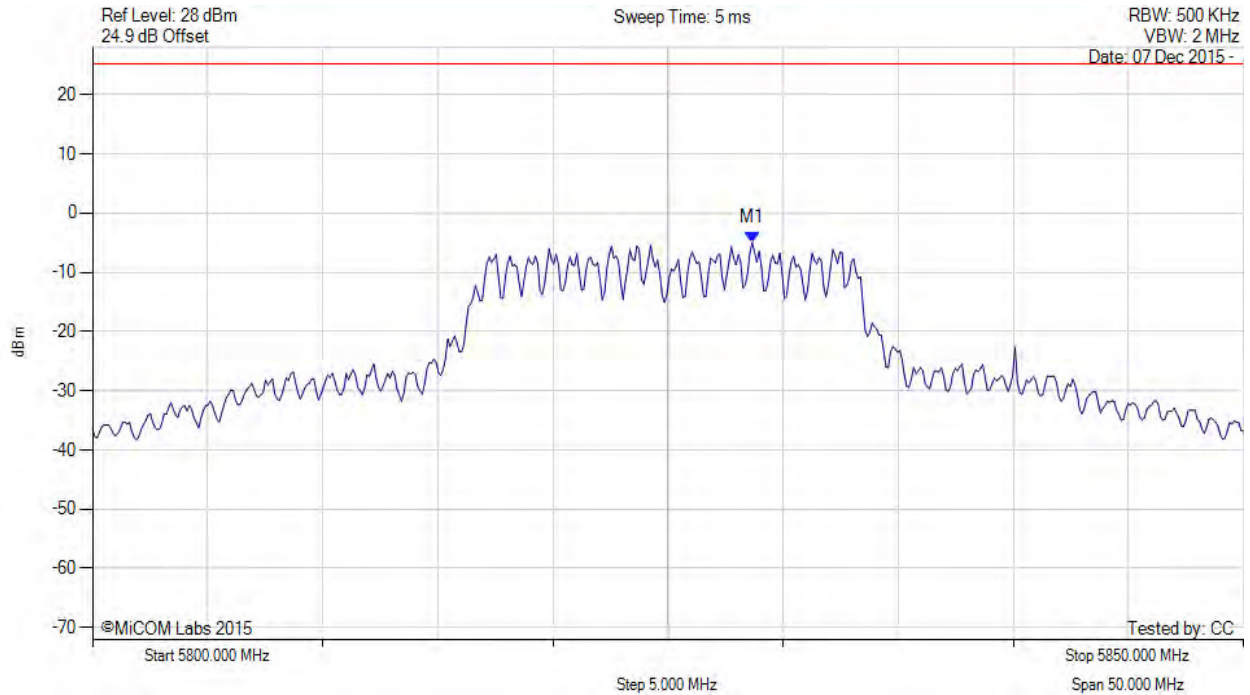

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5828.657 MHz : -5.013 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 288 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5825.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc

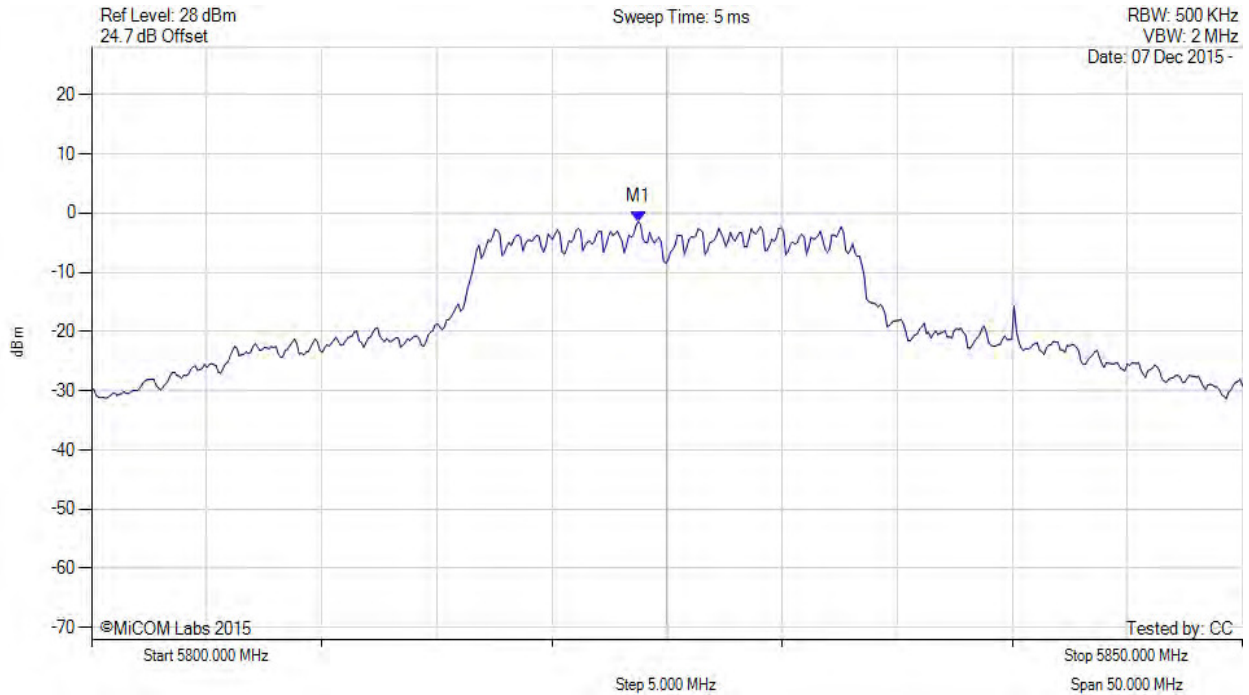

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5823.700 MHz : -1.388 dBm M1 + DCCF : 5823.700 MHz : -1.026 dBm Duty Cycle Correction Factor : +0.36 dB	Limit: ≤ 30.0 dBm Margin: -31.0 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 289 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5755.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

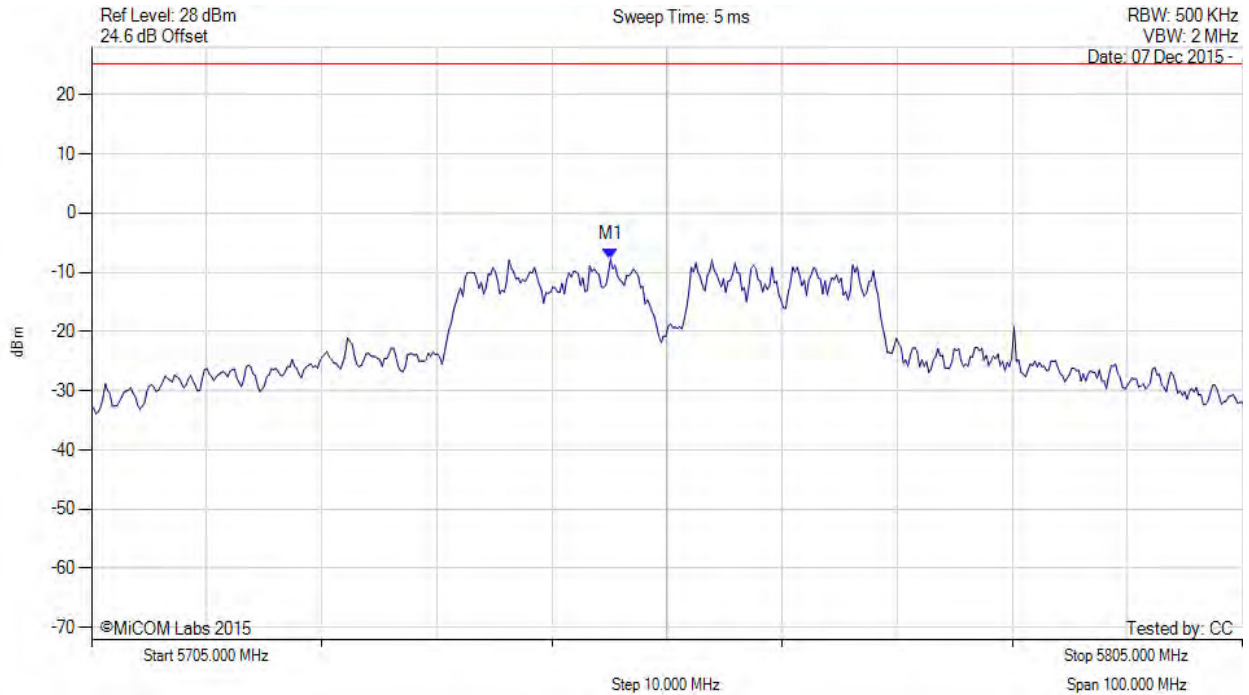

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5750.090 MHz : -7.807 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 290 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5755.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

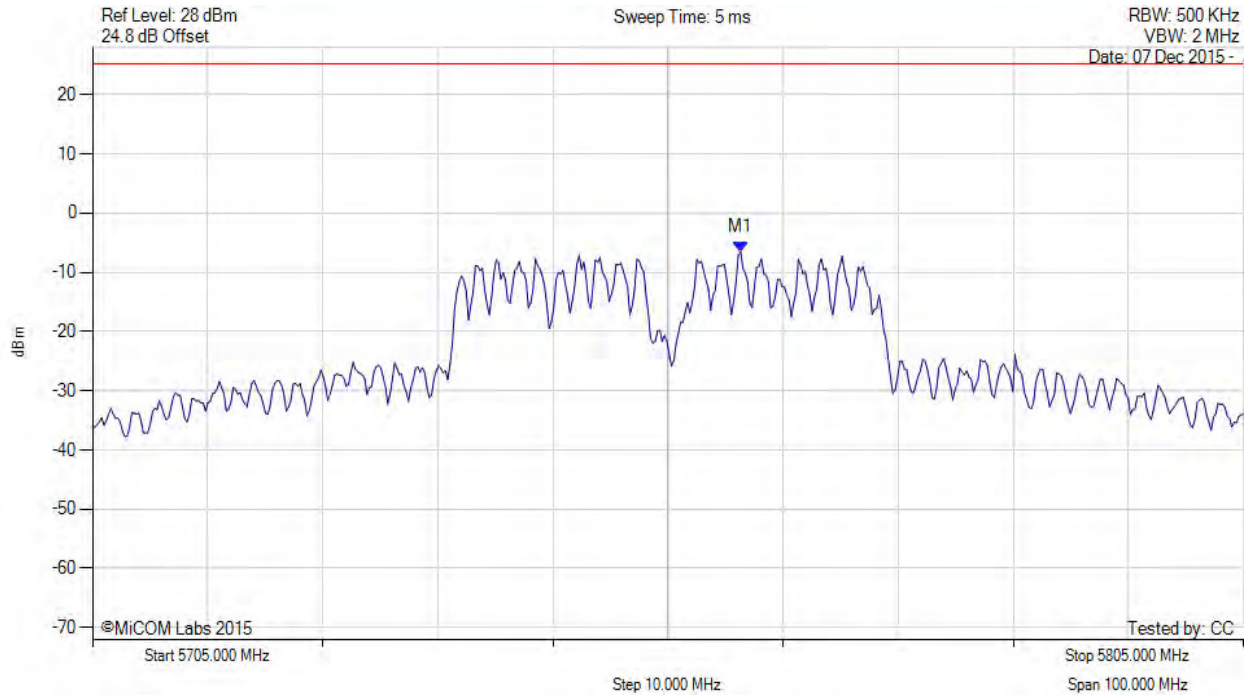

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5761.313 MHz : -6.525 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 291 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5755.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

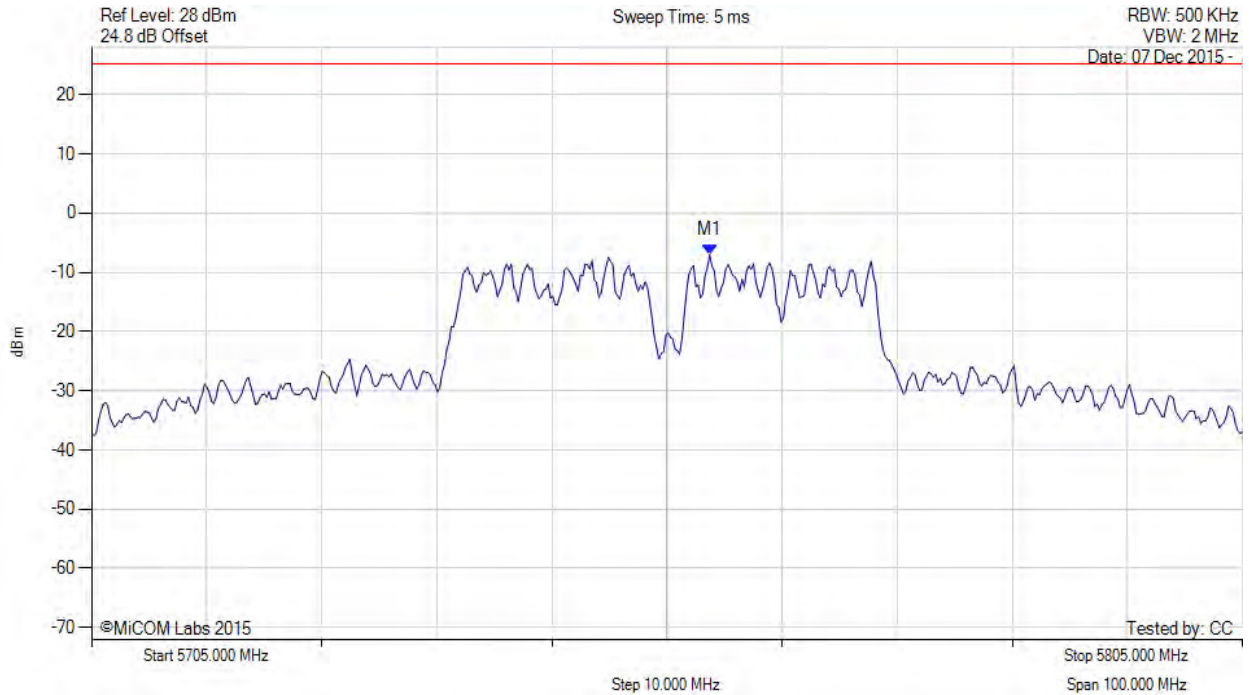

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5758.707 MHz : -7.080 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 292 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5755.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc

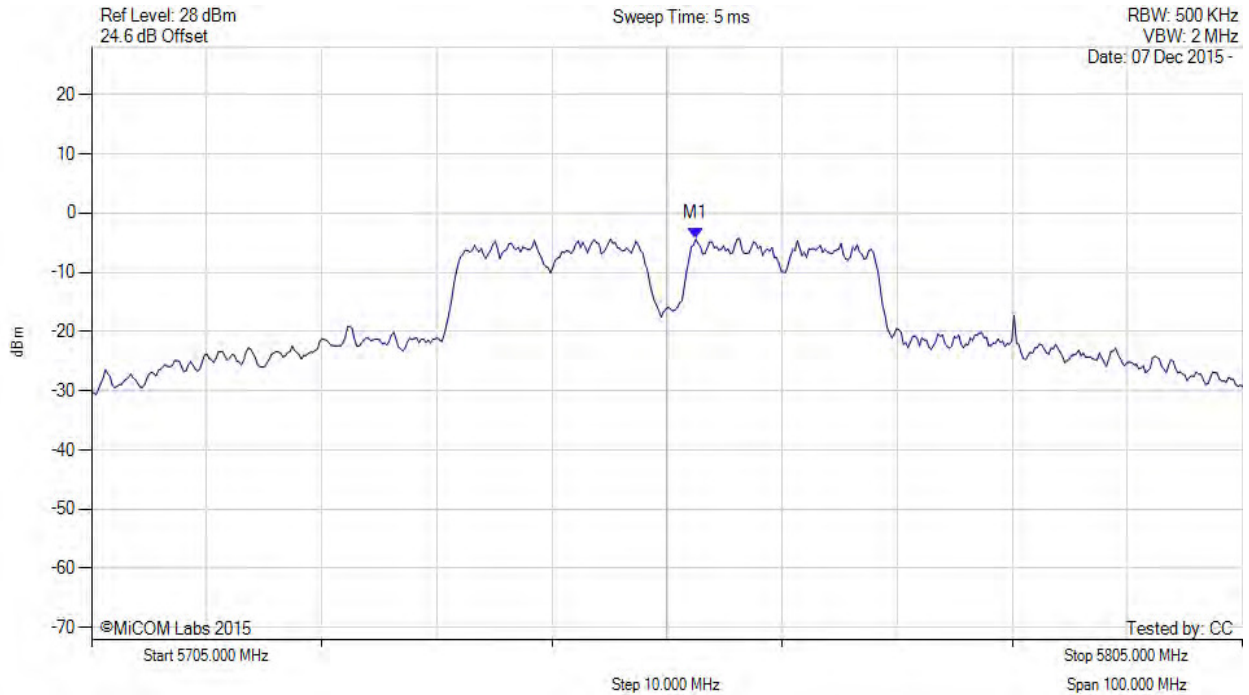

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5757.500 MHz : -4.341 dBm M1 + DCCF : 5757.500 MHz : -1.745 dBm Duty Cycle Correction Factor : +2.6 dB	Limit: ≤ 30.0 dBm Margin: -31.7 dB

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5795.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

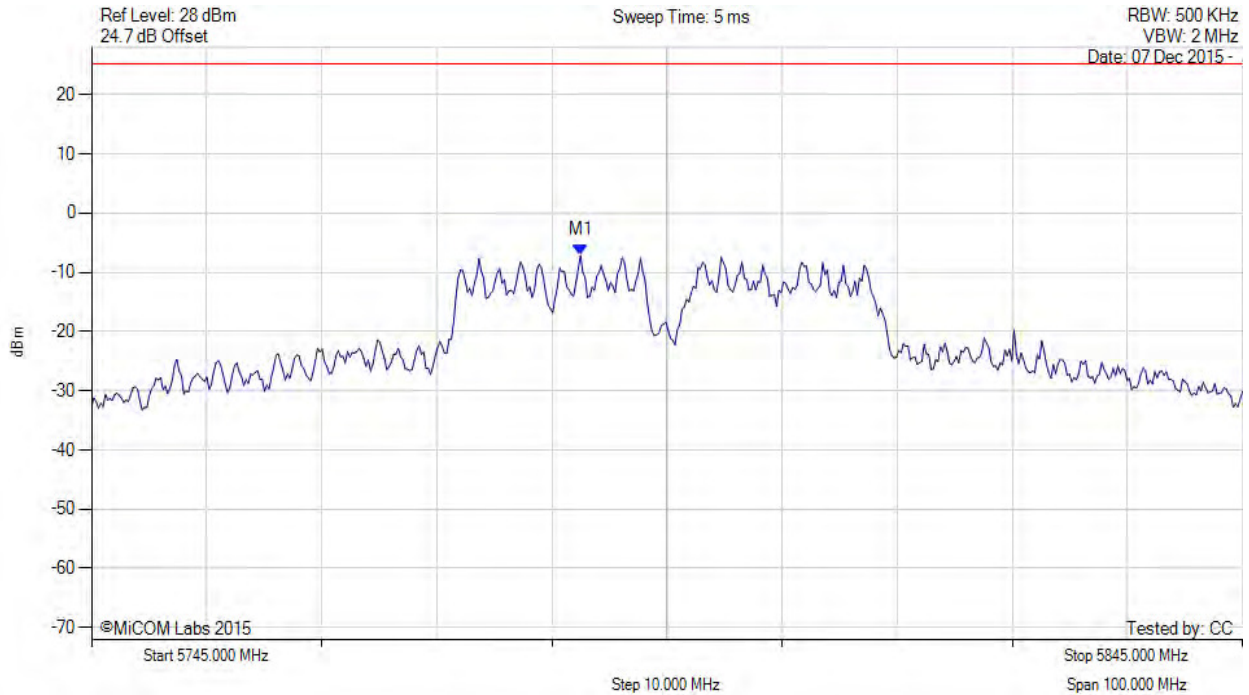

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5787.485 MHz : -7.161 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 294 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5795.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

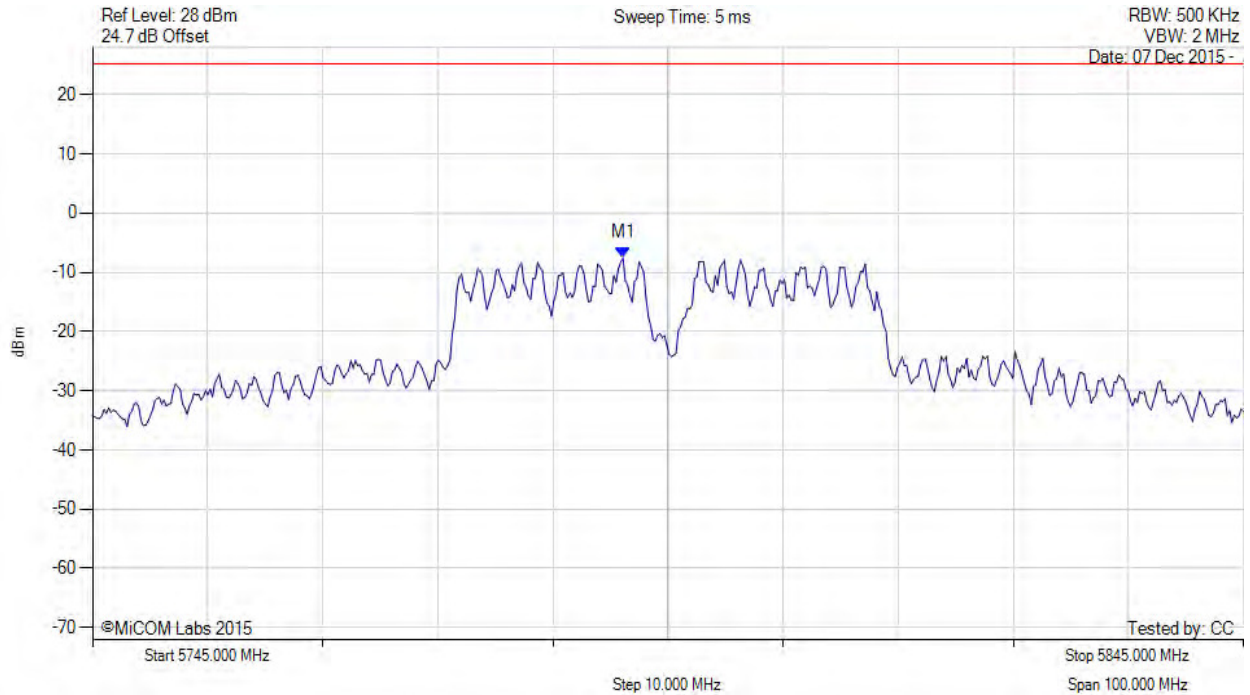

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5791.092 MHz : -7.566 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 295 of 405

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5795.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

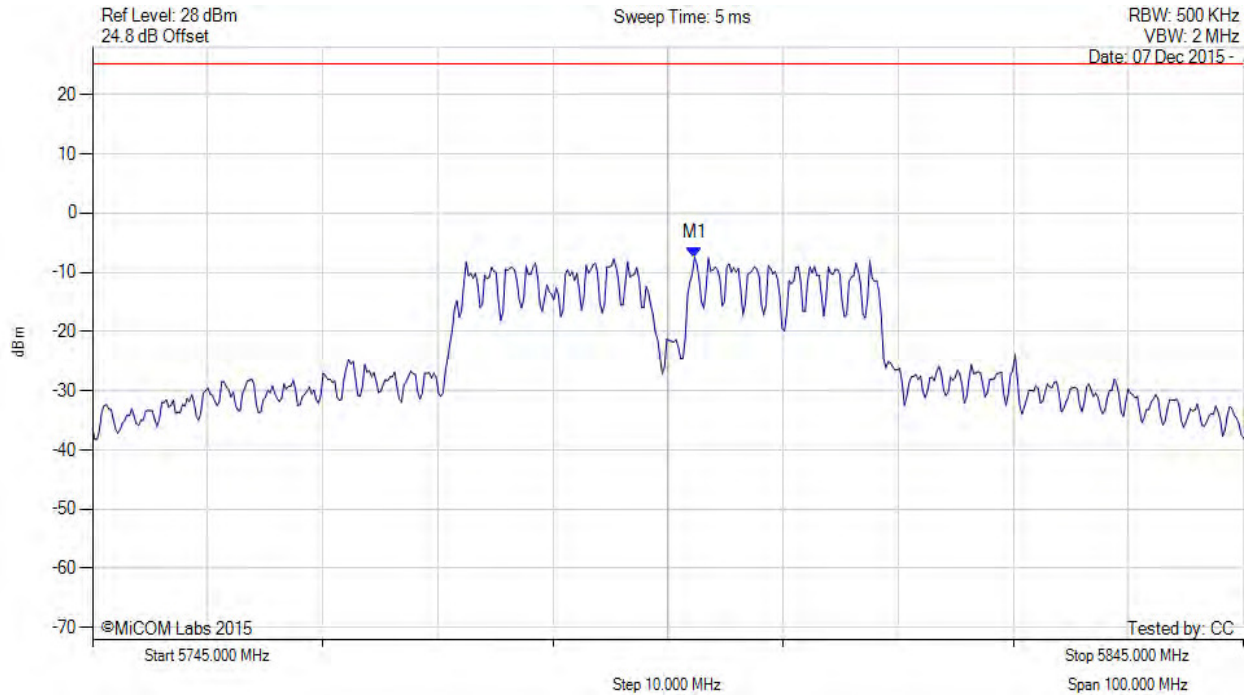

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5797.305 MHz : -7.480 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 296 of 405

POWER SPECTRAL DENSITY



Variante: 802.11n HT-40, Channel: 5795.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc

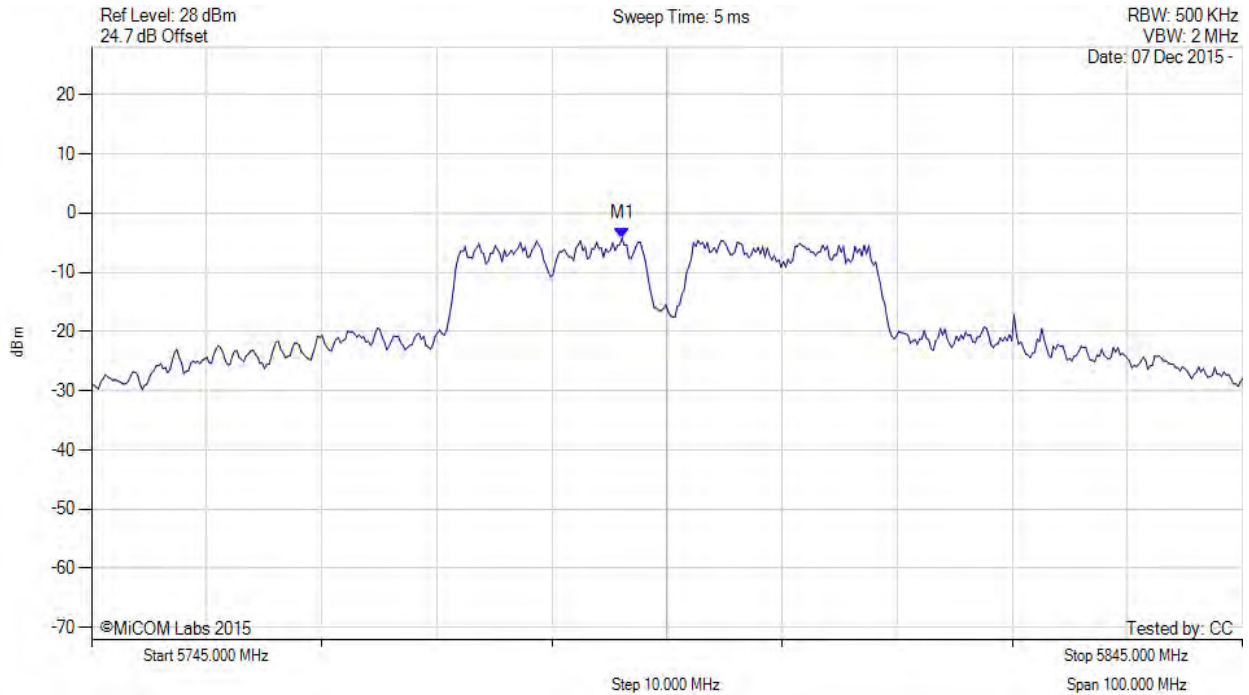

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5791.100 MHz : -4.241 dBm M1 + DCCF : 5791.100 MHz : -1.645 dBm Duty Cycle Correction Factor : +2.6 dB	Limit: ≤ 30.0 dBm Margin: -31.6 dB


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



A.3. Restricted Band Emissions

A.3.1 Antenna AP-ANT-1B

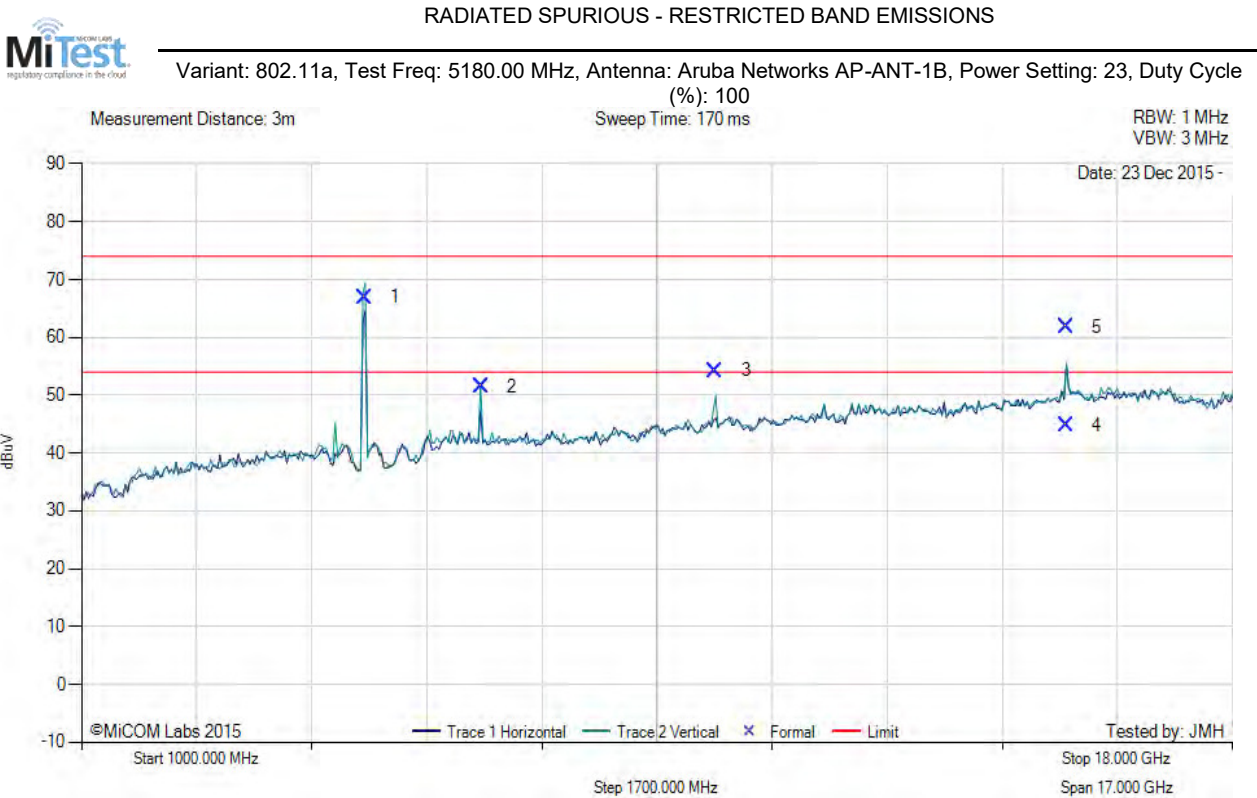

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	5182.48	74.71	3.69	-11.50	66.90	Fundamental	Vertical	151	19	--	--	
2	6906.74	54.95	4.11	-7.54	51.52	Peak (NRB)	Vertical	151	19	--	--	Pass
3	10363.25	53.87	5.58	-5.25	54.20	Peak (NRB)	Vertical	151	0	--	--	Pass
4	15543.04	39.37	5.97	-0.56	44.78	Max Avg	Horizontal	158	348	54.0	-9.2	Pass
5	15543.04	56.36	5.97	-0.56	61.77	Max Peak	Horizontal	158	348	74.0	-12.2	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 298 of 405

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5200.00 MHz, Antenna: Aruba Networks AP-ANT-1B, Power Setting: 23, Duty Cycle (%): 100

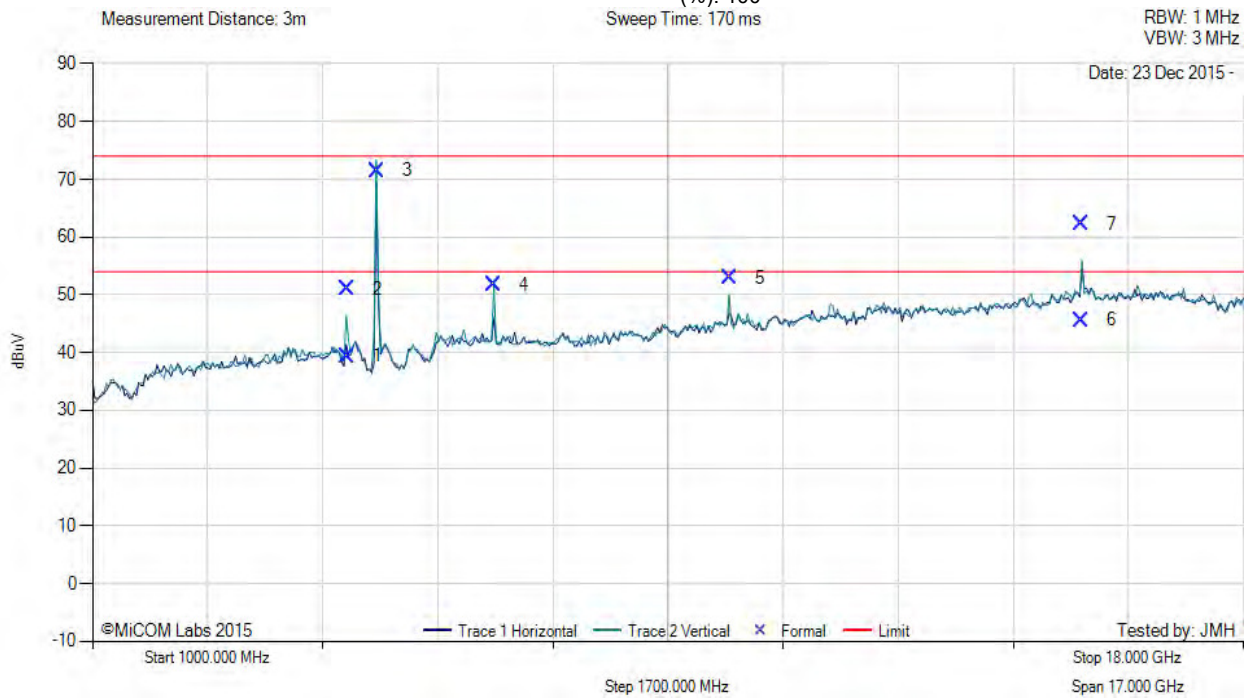

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	4764.81	46.94	3.59	-11.11	39.42	Max Avg	Vertical	152	325	54.0	-14.6	Pass
2	4764.81	58.50	3.59	-11.11	50.98	Max Peak	Vertical	152	325	74.0	-23.0	Pass
3	5202.04	79.28	3.66	-11.46	71.48	Fundamental	Vertical	151	17	--	--	
4	6933.32	55.03	4.11	-7.49	51.65	Peak (NRB)	Vertical	151	360	--	--	Pass
5	10405.74	52.53	5.45	-4.99	52.99	Peak (NRB)	Vertical	151	360	--	--	Pass
6	15603.01	39.80	6.03	-0.22	45.61	Max Avg	Vertical	161	297	54.0	-8.4	Pass
7	15603.01	56.51	6.03	-0.22	62.32	Max Peak	Vertical	161	297	74.0	-11.7	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 299 of 405

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5240.00 MHz, Antenna: Aruba Networks AP-ANT-1B, Power Setting: 23, Duty Cycle (%): 100

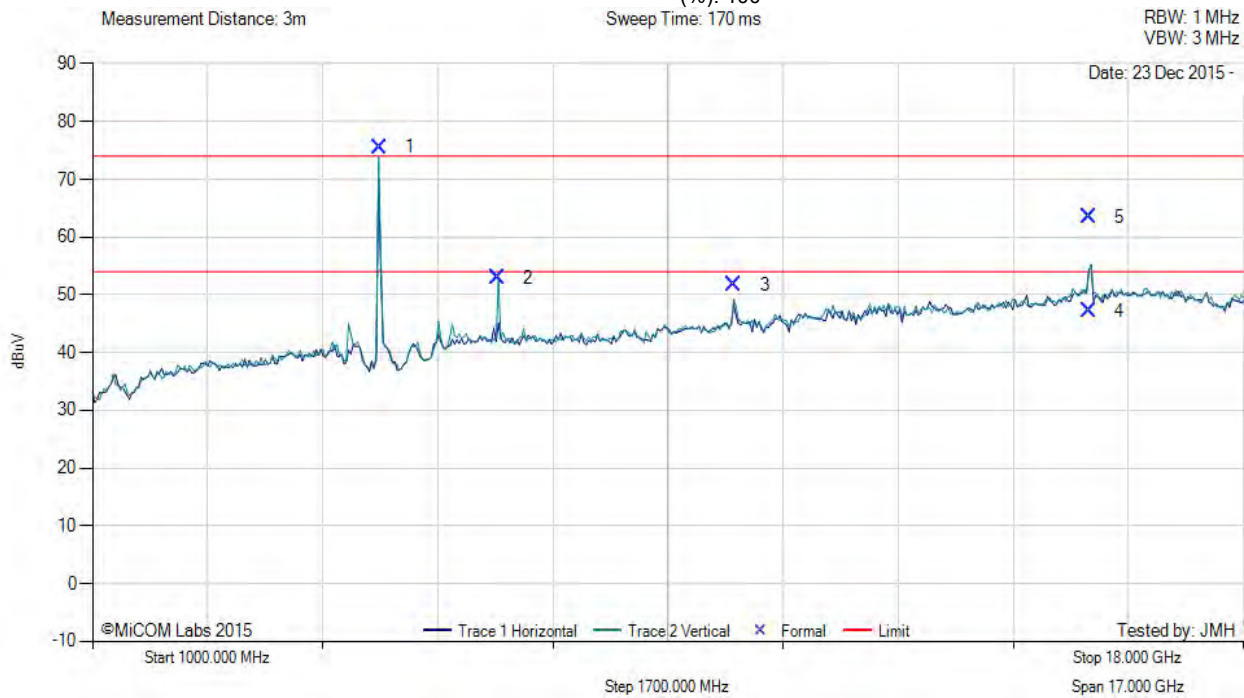

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5238.28	83.29	3.63	-11.37	75.55	Fundamental	Vertical	200	1	--	--	
2	6986.65	56.28	4.13	-7.45	52.96	Peak (NRB)	Vertical	200	0	--	--	Pass
3	10478.72	50.72	5.43	-4.46	51.69	Peak (NRB)	Vertical	200	101	--	--	Pass
4	15722.88	40.90	6.12	0.17	47.19	Max Avg	Horizontal	198	291	54.0	-6.8	Pass
5	15722.88	57.16	6.12	0.17	63.45	Max Peak	Horizontal	198	291	74.0	-10.6	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 300 of 405

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5745.00 MHz, Antenna: Aruba Networks AP-ANT-1B, Power Setting: 23, Duty Cycle (%): 100

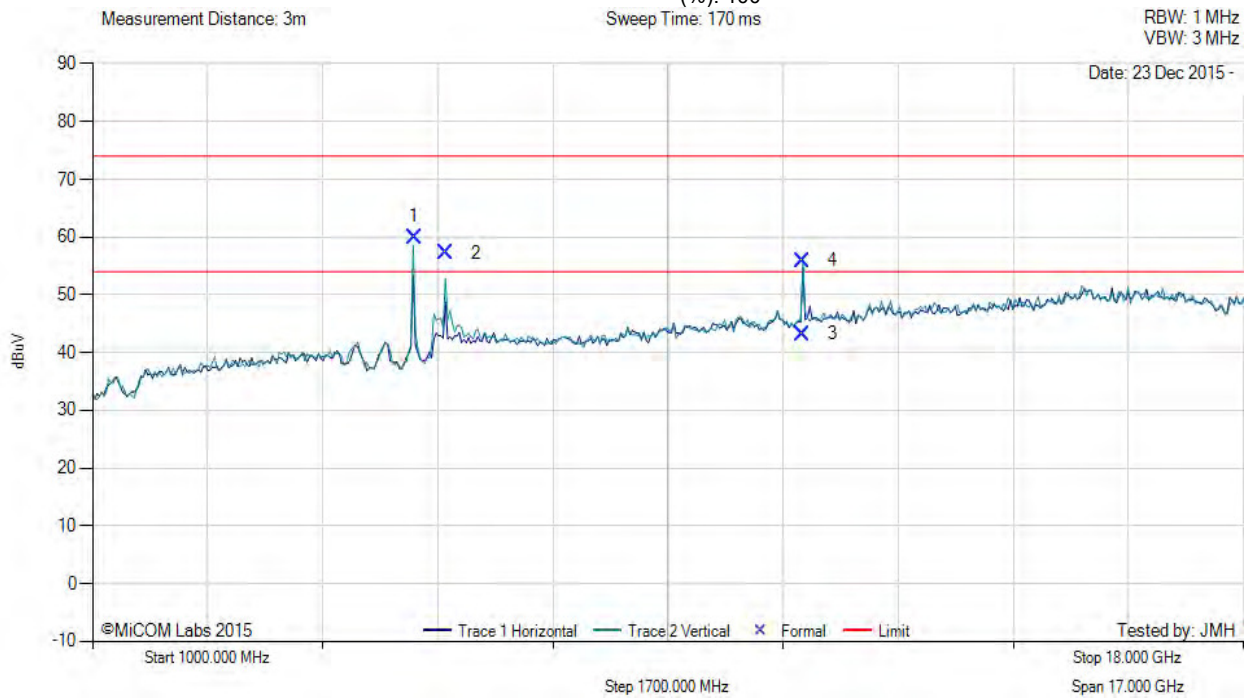

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5752.58	66.80	3.84	-10.61	60.03	Fundamental	Vertical	200	1	--	--	
2	6218.31	62.11	3.92	-8.80	57.23	Peak (NRB)	Vertical	200	39	--	--	Pass
3	11489.90	42.59	5.45	-4.84	43.20	Max Avg	Vertical	131	21	54.0	-10.8	Pass
4	11489.90	55.31	5.45	-4.84	55.92	Max Peak	Vertical	131	21	74.0	-18.1	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 301 of 405

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5785.00 MHz, Antenna: Aruba Networks AP-ANT-1B, Power Setting: 23, Duty Cycle (%): 100

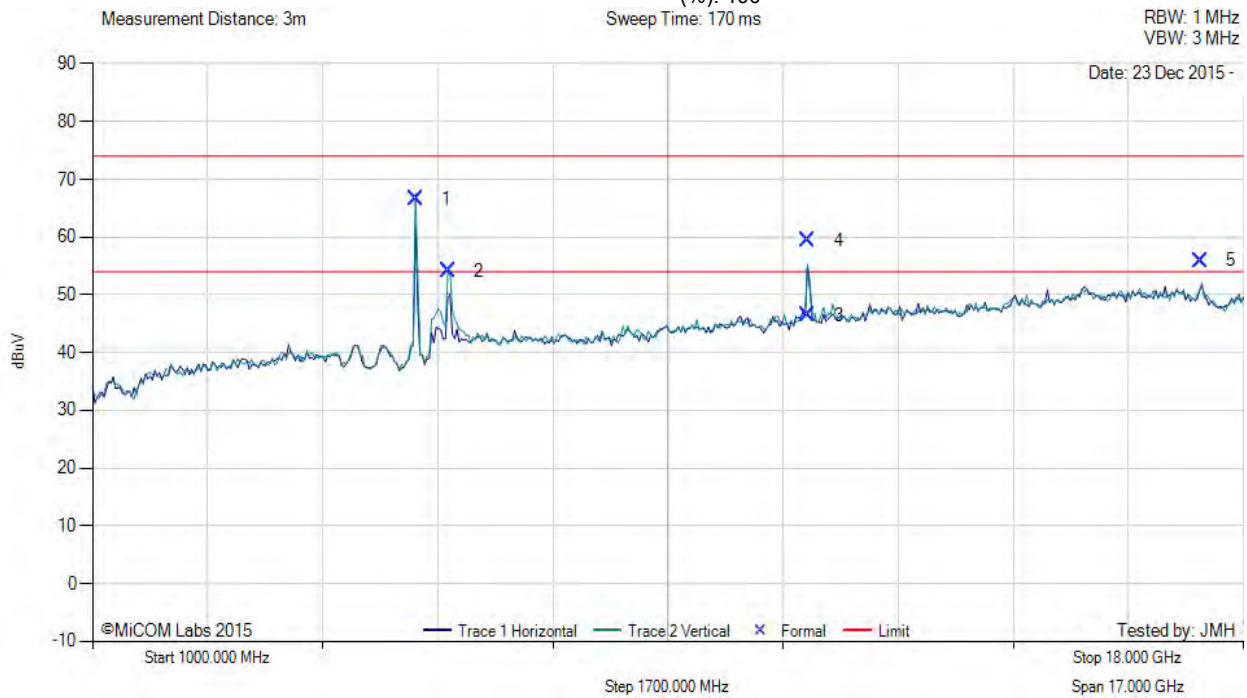

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5783.93	73.16	3.80	-10.45	66.51	Fundamental	Vertical	200	1	--	--	
2	6261.60	58.76	3.93	-8.54	54.15	Peak (NRB)	Vertical	200	1	--	--	Pass
3	11571.58	45.60	5.42	-4.63	46.39	Max Avg	Vertical	196	0	54.0	-7.6	Pass
4	11571.58	58.59	5.42	-4.63	59.38	Max Peak	Vertical	196	0	74.0	-14.6	Pass
5	17359.84	49.64	6.28	-0.04	55.88	Peak (NRB)	Vertical	200	360	--	--	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 302 of 405

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5825.00 MHz, Antenna: Aruba Networks AP-ANT-1B, Power Setting: 23, Duty Cycle (%): 100

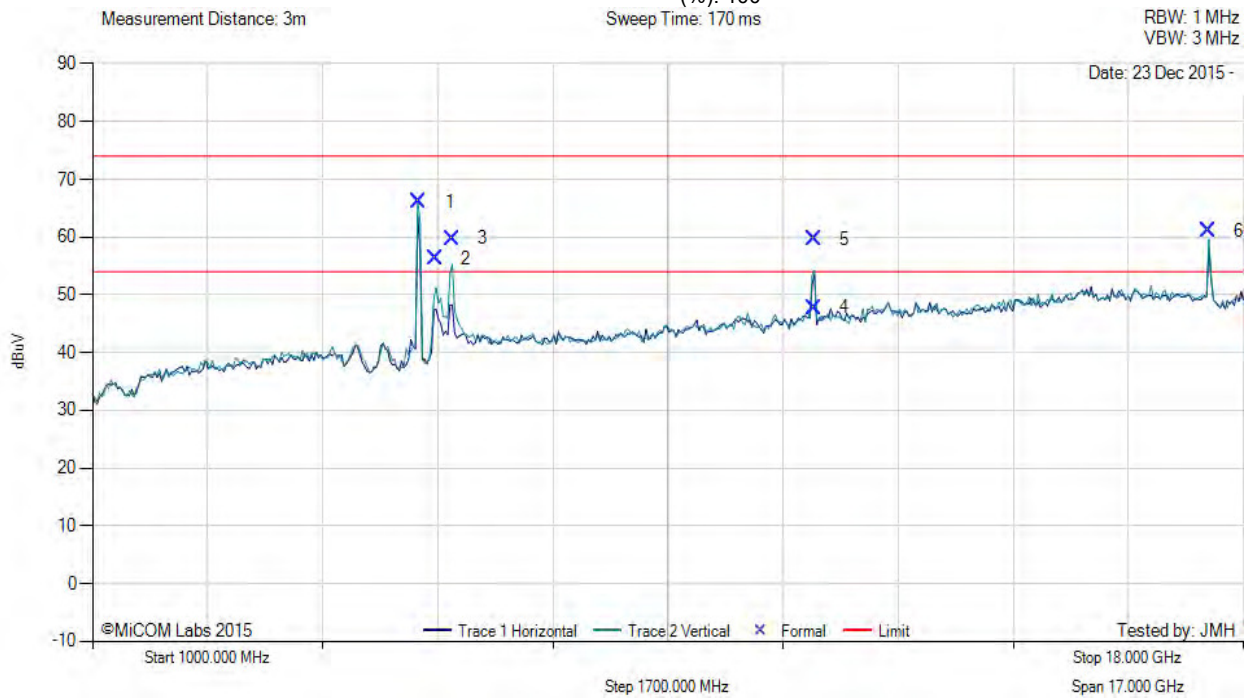

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5823.29	72.59	3.83	-10.25	66.17	Fundamental	Vertical	151	1	--	--	
2	6067.77	62.02	3.88	-9.61	56.29	Peak (NRB)	Vertical	200	360	--	--	Pass
3	6308.90	64.18	3.92	-8.38	59.72	Peak (NRB)	Vertical	200	360	--	--	Pass
4	11651.07	46.77	5.46	-4.47	47.76	Max Avg	Vertical	164	353	54.0	-6.2	Pass
5	11651.07	58.63	5.46	-4.47	59.62	Max Peak	Vertical	164	353	74.0	-14.4	Pass
6	17479.60	55.30	6.34	-0.60	61.04	Peak (NRB)	Vertical	200	246	--	--	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 303 of 405

A.3.2 Antenna AP-ANT-13B

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5180.00 MHz, Antenna: Aruba Networks AP-ANT-13B, Power Setting: 23, Duty Cycle (%): 100

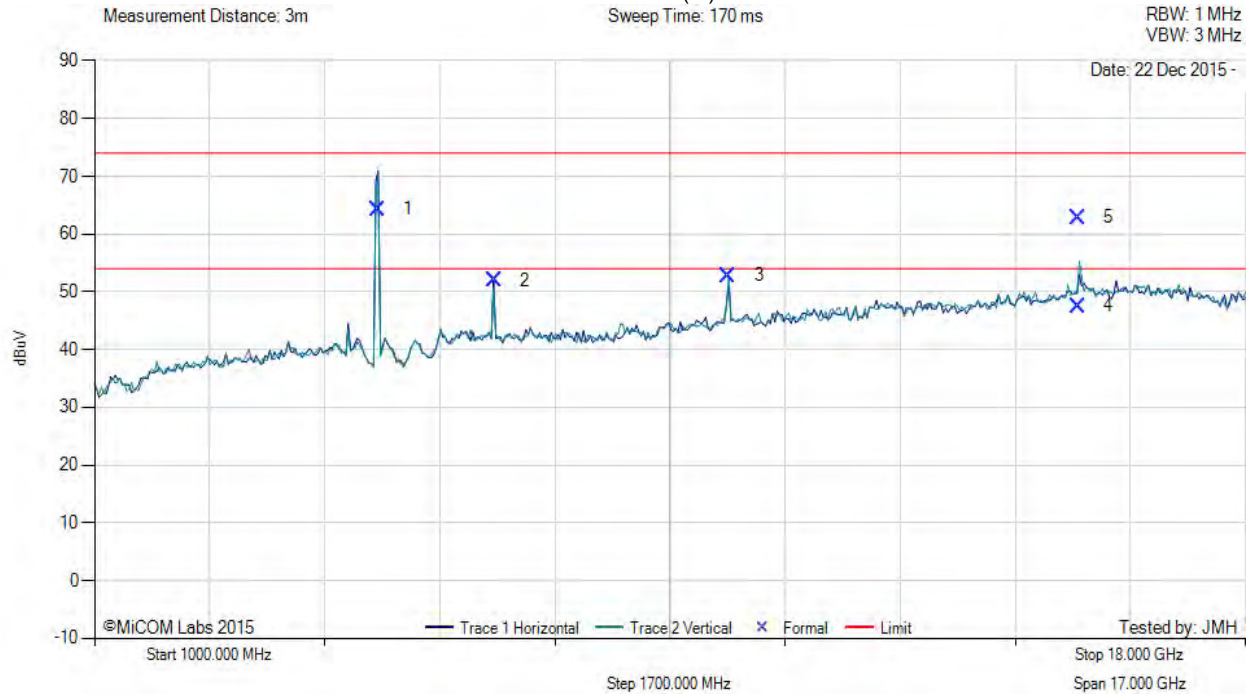

Num	Frequency MHz	Raw dB μ V	Cable Loss	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
1	5179.12	72.13	3.69	-11.51	64.31	Fundamental	Horizontal	151	1	--	--	
2	6906.59	55.43	4.11	-7.54	52.00	Peak (NRB)	Horizontal	151	9	--	--	Pass
3	10362.69	52.44	5.58	-5.25	52.77	Peak (NRB)	Vertical	151	9	--	--	Pass
4	15533.54	42.24	5.89	-0.60	47.53	Max Avg	Vertical	172	141	54.0	-6.5	Pass
5	15533.54	57.59	5.89	-0.60	62.88	Max Peak	Vertical	172	141	74.0	-11.1	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 304 of 405

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5200.00 MHz, Antenna: Aruba Networks AP-ANT-13B, Power Setting: 23, Duty Cycle (%): 100

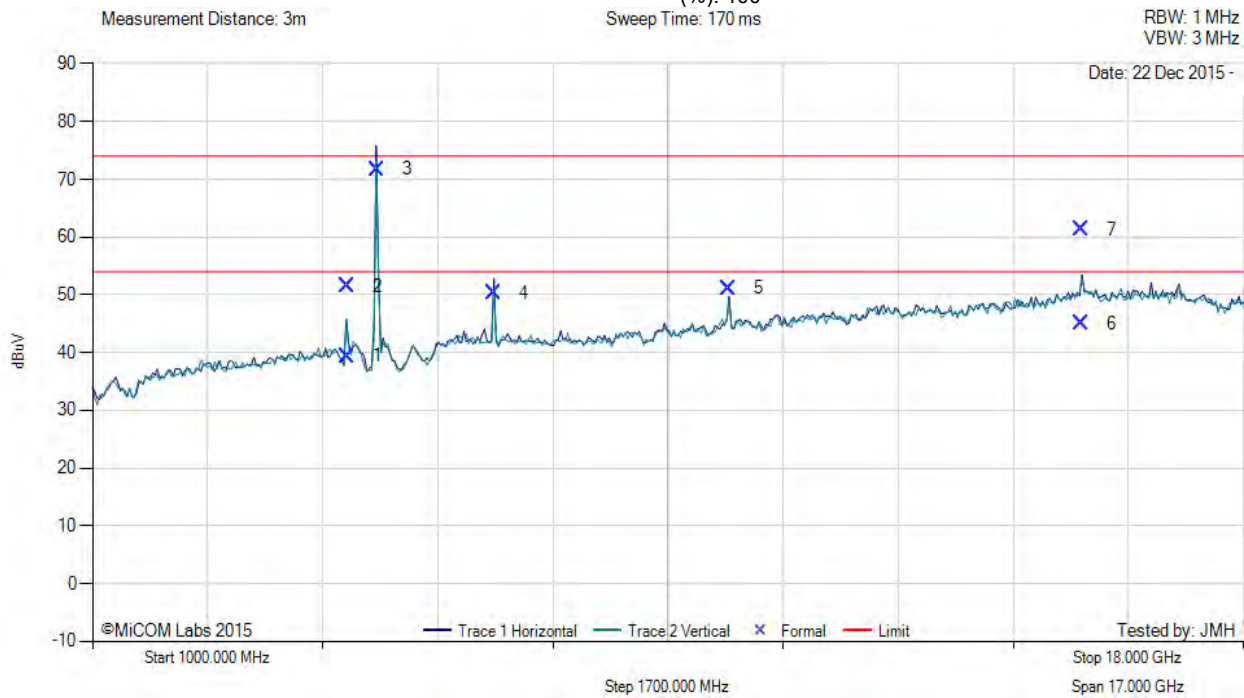

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	4765.01	46.92	3.59	-11.11	39.40	Max Avg	Horizontal	100	332	54.0	-14.6	Pass
2	4765.01	59.03	3.59	-11.11	51.51	Max Peak	Horizontal	100	332	74.0	-22.5	Pass
3	5199.00	79.56	3.66	-11.47	71.75	Fundamental	Horizontal	101	1	--	--	
4	6933.35	53.62	4.11	-7.49	50.24	Peak (NRB)	Horizontal	148	0	--	--	Pass
5	10400.28	50.75	5.40	-5.03	51.12	Peak (NRB)	Horizontal	148	48	--	--	Pass
6	15602.89	39.23	6.03	-0.22	45.04	Max Avg	Horizontal	157	346	54.0	-9.0	Pass
7	15602.89	55.50	6.03	-0.22	61.31	Max Peak	Horizontal	157	346	74.0	-12.7	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 305 of 405

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5240.00 MHz, Antenna: Aruba Networks AP-ANT-13B, Power Setting: 23, Duty Cycle (%): 100

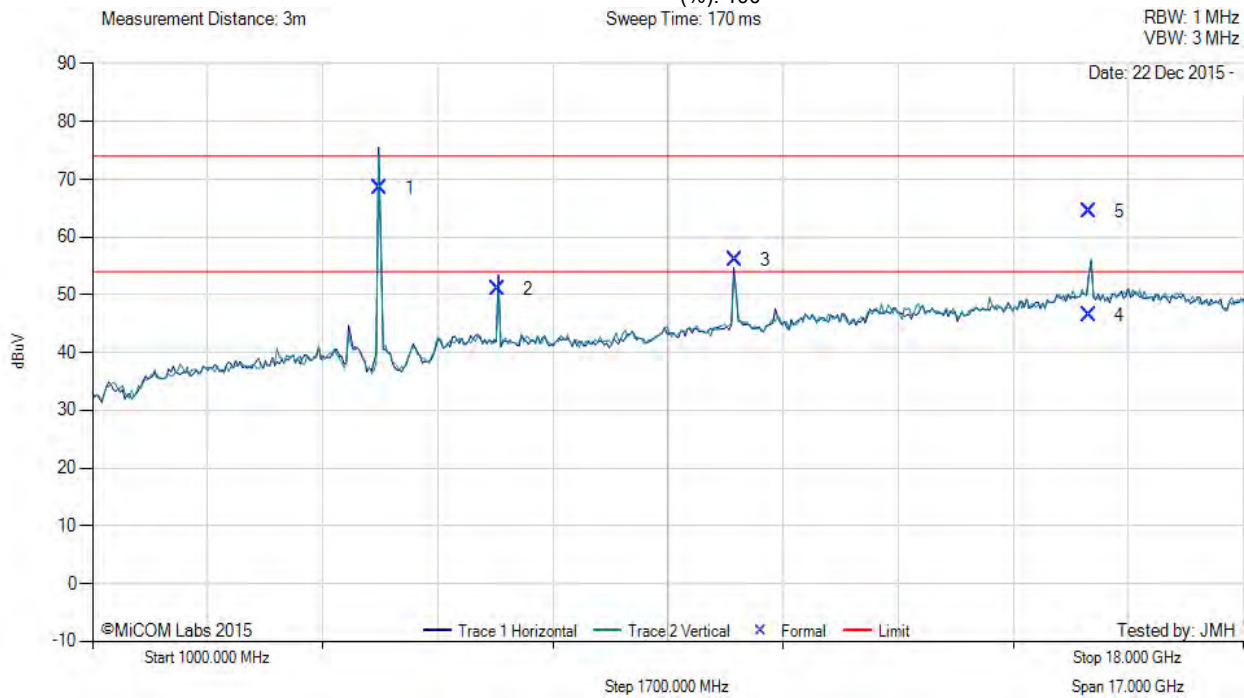

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5239.16	76.19	3.63	-11.37	68.45	Fundamental	Horizontal	151	1	--	--	
2	6986.52	54.29	4.13	-7.45	50.97	Peak (NRB)	Horizontal	151	18	--	--	Pass
3	10482.92	55.07	5.40	-4.44	56.03	Peak (NRB)	Horizontal	151	18	--	--	Pass
4	15723.20	40.11	6.12	0.17	46.40	Max Avg	Horizontal	147	292	54.0	-7.6	Pass
5	15723.20	58.09	6.12	0.17	64.38	Max Peak	Horizontal	147	292	74.0	-9.6	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 306 of 405

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5745.00 MHz, Antenna: Aruba Networks AP-ANT-13B, Power Setting: 23, Duty Cycle (%): 100

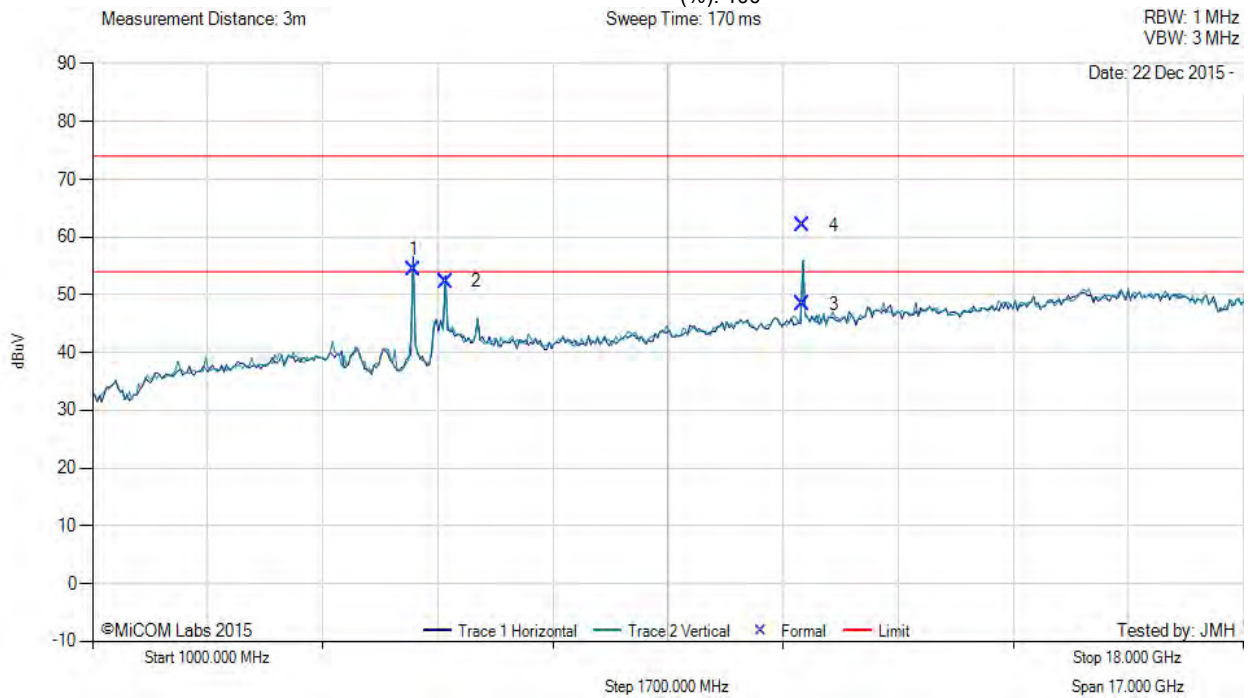

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5738.00	61.24	3.82	-10.67	54.39	Fundamental	Horizontal	101	21	--	--	
2	6220.64	57.20	3.92	-8.77	52.35	Peak (NRB)	Horizontal	151	21	--	--	Pass
3	11494.79	47.79	5.45	-4.83	48.41	Max Avg	Horizontal	146	315	54.0	-5.6	Pass
4	11494.79	61.35	5.45	-4.83	61.97	Max Peak	Horizontal	146	315	74.0	-12.0	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 307 of 405

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5785.00 MHz, Antenna: Aruba Networks AP-ANT-13B, Power Setting: 23, Duty Cycle (%): 100

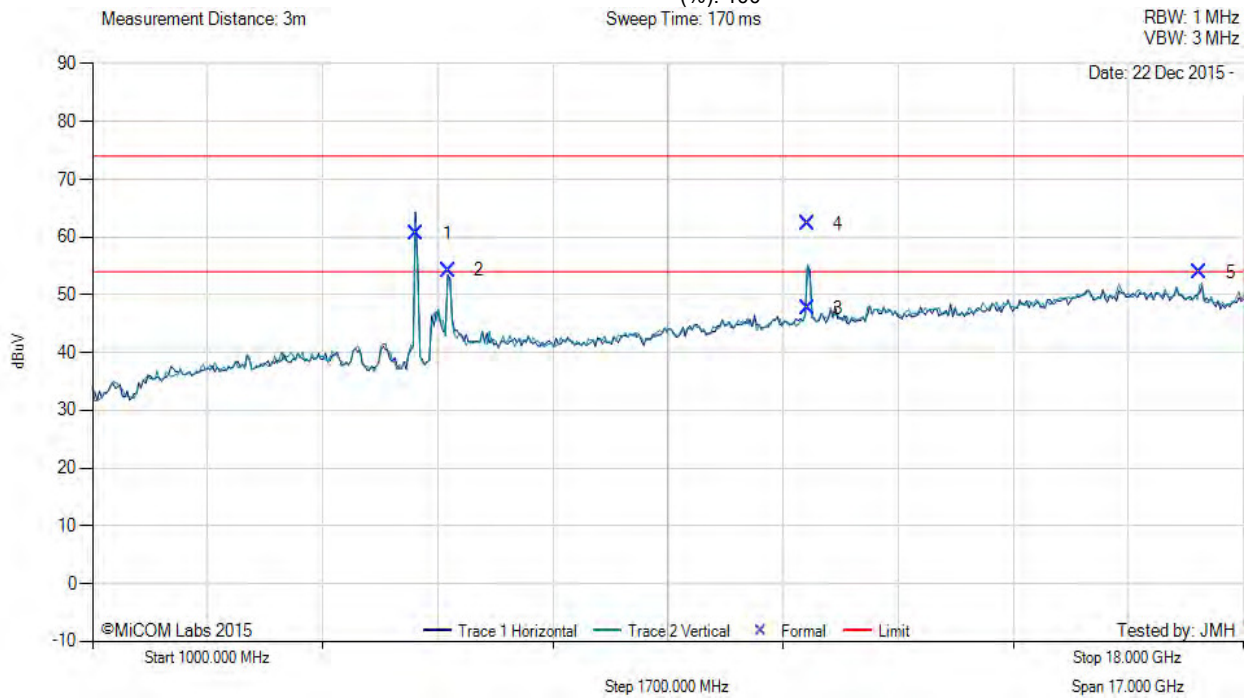

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5784.17	67.27	3.80	-10.45	60.62	Fundamental	Horizontal	101	1	--	--	
2	6261.76	58.87	3.93	-8.54	54.26	Peak (NRB)	Horizontal	101	55	--	--	Pass
3	11568.70	46.81	5.48	-4.65	47.64	Max Avg	Horizontal	196	327	54.0	-6.4	Pass
4	11568.70	61.40	5.48	-4.65	62.23	Max Peak	Horizontal	196	327	74.0	-11.8	Pass
5	17355.35	47.68	6.27	-0.01	53.94	Peak (NRB)	Horizontal	200	16	--	--	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 308 of 405

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5825.00 MHz, Antenna: Aruba Networks AP-ANT-13B, Power Setting: 23, Duty Cycle (%): 100

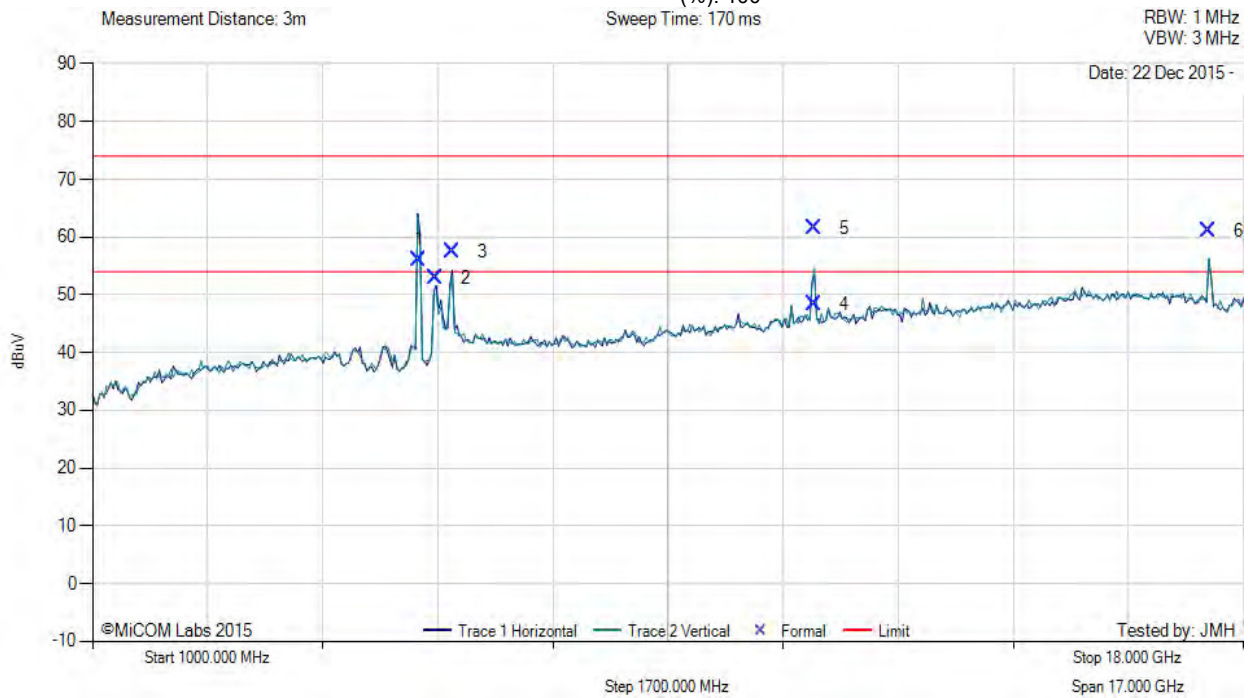

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5817.36	62.46	3.82	-10.29	55.99	Fundamental	Horizontal	151	1	--	--	
2	6067.57	58.62	3.88	-9.61	52.89	Peak (NRB)	Horizontal	151	65	--	--	Pass
3	6309.78	61.99	3.91	-8.37	57.53	Peak (NRB)	Horizontal	151	16	--	--	Pass
4	11651.15	47.45	5.46	-4.47	48.44	Max Avg	Vertical	152	354	54.0	-5.6	Pass
5	11651.15	60.48	5.46	-4.47	61.47	Max Peak	Vertical	152	354	74.0	-12.5	Pass
6	17478.24	55.37	6.31	-0.60	61.08	Peak (NRB)	Horizontal	151	20	--	--	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 309 of 405

A.3.3 Antenna AP-ANT-16

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5180.00 MHz, Antenna: Aruba Networks AP-ANT-16, Power Setting: 23, Duty Cycle (%): 100

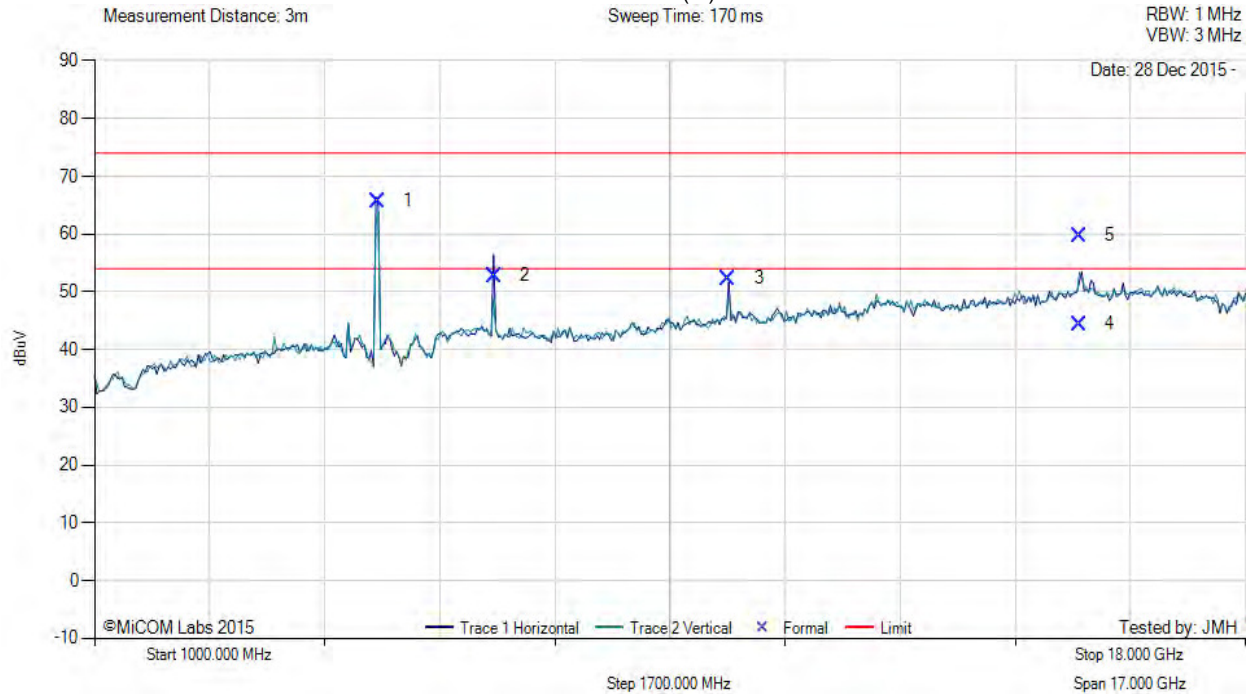

Num	Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1	5181.32	73.53	3.69	-11.50	65.72	Fundamental	Horizontal	101	9	--	--	
2	6906.74	56.26	4.11	-7.54	52.83	Peak (NRB)	Horizontal	151	9	--	--	Pass
3	10365.81	51.98	5.59	-5.23	52.34	Peak (NRB)	Horizontal	151	9	--	--	Pass
4	15542.64	39.03	5.97	-0.56	44.44	Max Avg	Horizontal	166	349	54.0	-9.6	Pass
5	15542.64	54.31	5.97	-0.56	59.72	Max Peak	Horizontal	166	349	74.0	-14.3	Pass

Test Notes: EUT on 150cm Table, powered by PDSine 9001GR

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 310 of 405

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5200.00 MHz, Antenna: Aruba Networks AP-ANT-16, Power Setting: 23, Duty Cycle (%): 100

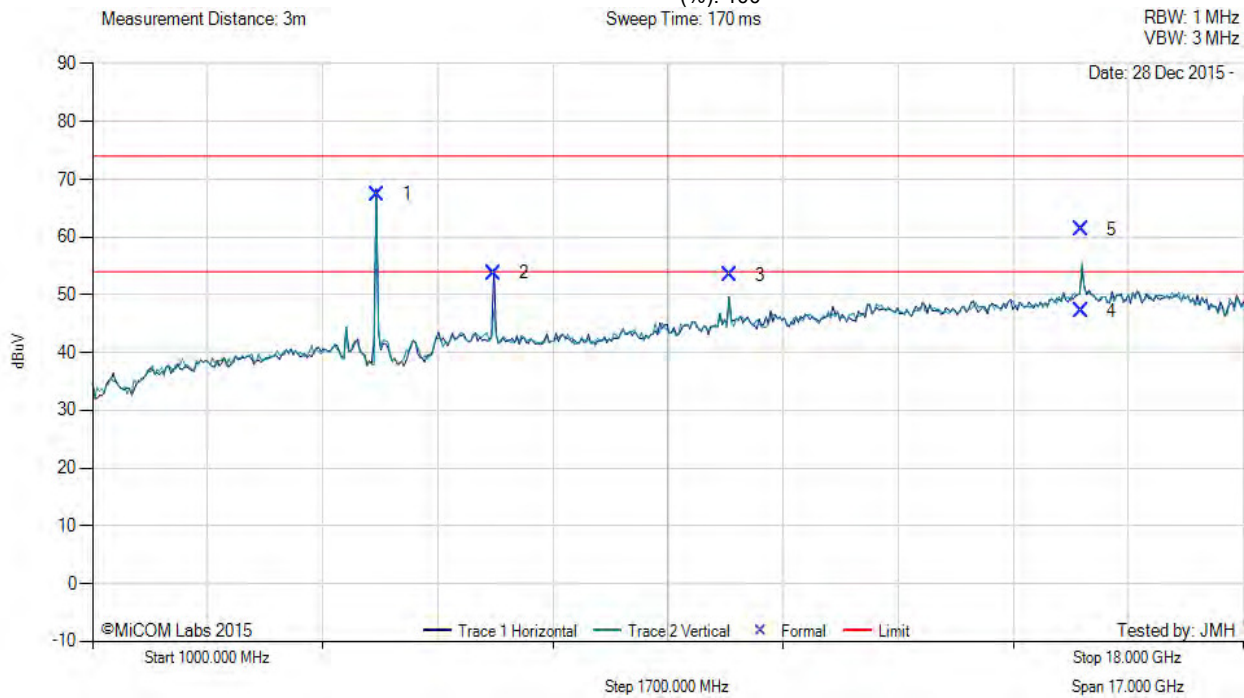

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5201.48	75.21	3.66	-11.46	67.41	Fundamental	Horizontal	100	0	--	--	
2	6933.35	57.14	4.11	-7.49	53.76	Peak (NRB)	Horizontal	151	19	--	--	Pass
3	10405.90	52.96	5.45	-4.99	53.42	Peak (NRB)	Horizontal	151	0	--	--	Pass
4	15602.28	41.42	6.03	-0.23	47.22	Max Avg	Vertical	150	316	54.0	-6.8	Pass
5	15602.28	55.50	6.03	-0.23	61.30	Max Peak	Vertical	150	316	74.0	-12.7	Pass

Test Notes: EUT on 150cm Table, powered by PDsine 9001GR

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 311 of 405

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5240.00 MHz, Antenna: Aruba Networks AP-ANT-16, Power Setting: 23, Duty Cycle (%): 100

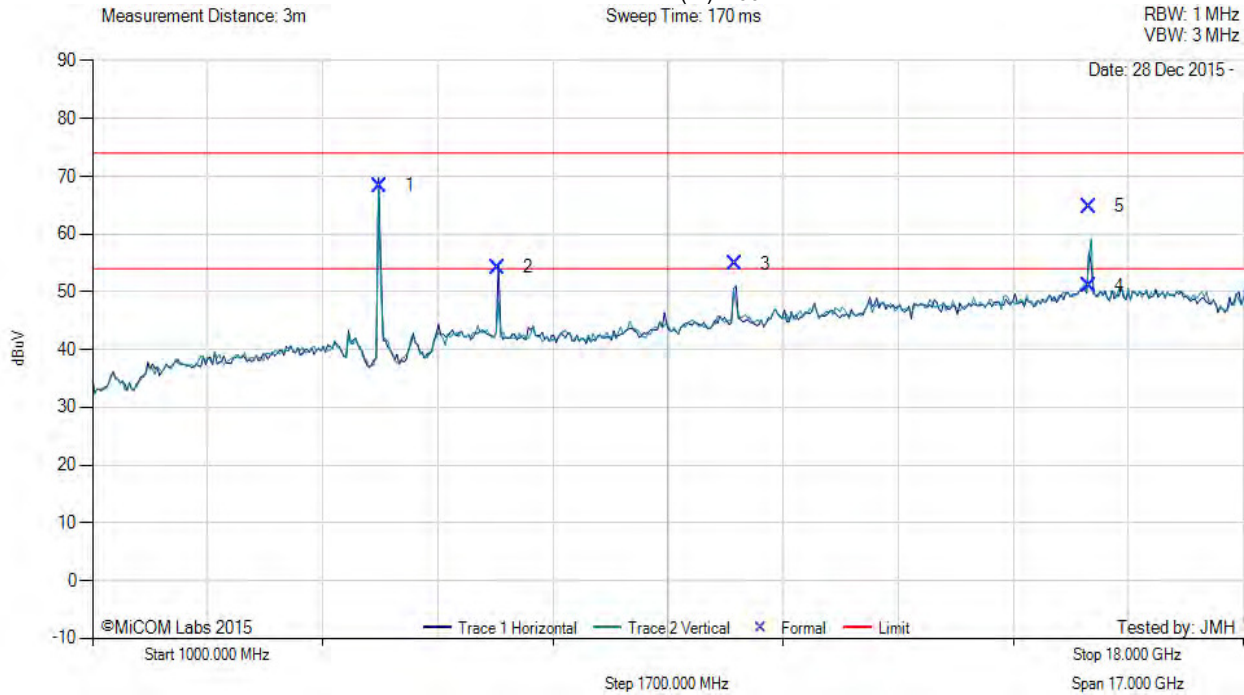

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5241.32	76.09	3.63	-11.36	68.36	Fundamental	Horizontal	100	0	--	--	
2	6986.65	57.56	4.13	-7.45	54.24	Peak (NRB)	Horizontal	151	23	--	--	Pass
3	10485.45	53.84	5.41	-4.42	54.83	Peak (NRB)	Horizontal	151	0	--	--	Pass
4	15722.32	44.69	6.11	0.17	50.97	Max Avg	Vertical	146	316	54.0	-3.0	Pass
5	15722.32	58.50	6.11	0.17	64.78	Max Peak	Vertical	146	316	74.0	-9.2	Pass

Test Notes: EUT on 150cm Table, powered by PDsine 9001GR

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 312 of 405



RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS


Variant: 802.11a, Test Freq: 5745.00 MHz, Antenna: Aruba Networks AP-ANT-16, Power Setting: 23

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz
VBW: 3 MHz

Date: 28 Dec 2015 -

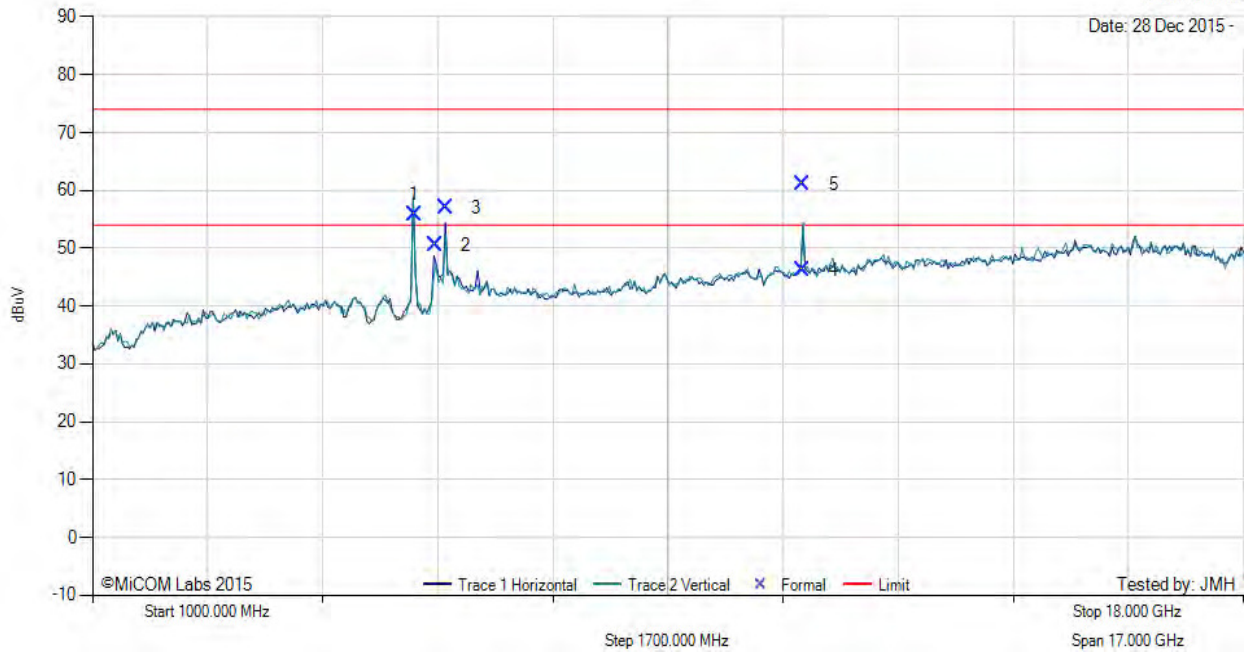

Num	Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1	5752.74	62.56	3.84	-10.61	55.79	Fundamental	Horizontal	148	30	--	--	
2	6063.88	56.20	3.89	-9.62	50.47	Peak (NRB)	Horizontal	151	30	--	--	Pass
3	6222.00	61.85	3.92	-8.76	57.01	Peak (NRB)	Horizontal	151	30	--	--	Pass
4	11495.68	45.64	5.45	-4.82	46.27	Max Avg	Horizontal	163	306	54.0	-7.7	Pass
5	11495.68	60.50	5.45	-4.82	61.13	Max Peak	Horizontal	163	306	74.0	-12.9	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 313 of 405



RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS


Variant: 802.11a, Test Freq: 5785.00 MHz, Antenna: Aruba Networks AP-ANT-16, Power Setting: 23

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz
VBW: 3 MHz

Date: 28 Dec 2015 -

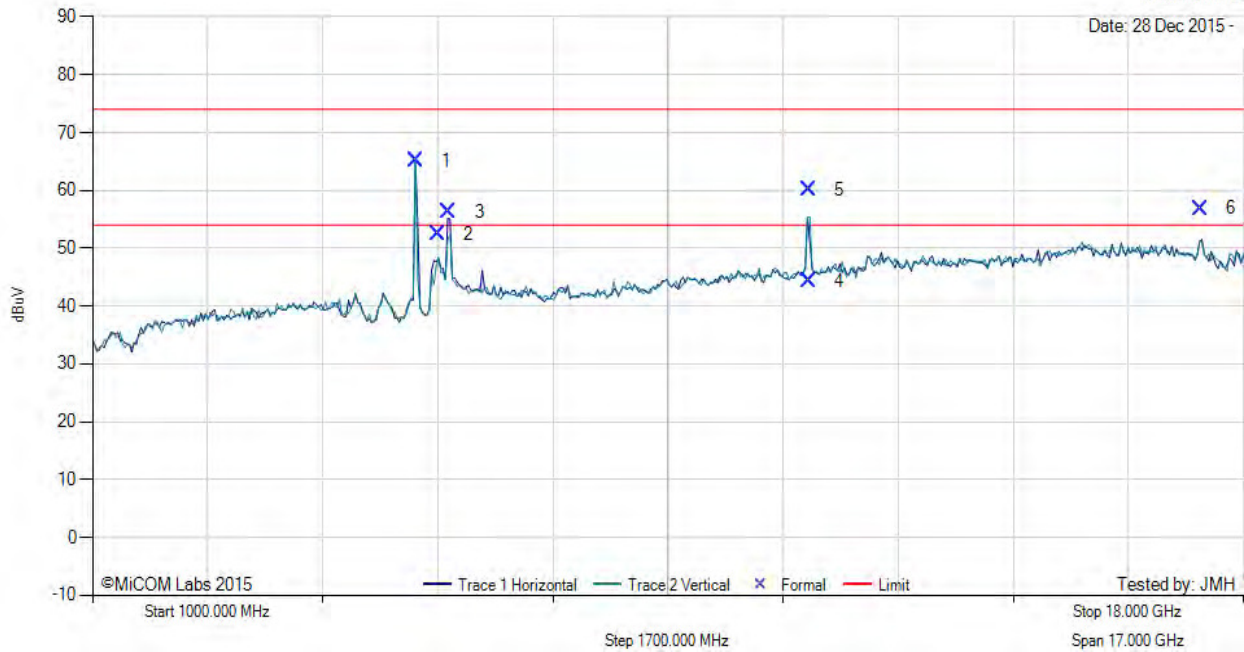

Num	Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1	5783.13	71.81	3.80	-10.46	65.15	Fundamental	Horizontal	151	38	--	--	
2	6103.69	58.07	3.87	-9.48	52.46	Peak (NRB)	Horizontal	151	0	--	--	Pass
3	6266.93	60.82	3.93	-8.52	56.23	Peak (NRB)	Horizontal	151	38	--	--	Pass
4	11580.28	43.56	5.41	-4.60	44.37	Max Avg	Vertical	170	356	54.0	-9.6	Pass
5	11580.28	59.30	5.41	-4.60	60.11	Max Peak	Vertical	170	356	74.0	-13.9	Pass
6	17365.45	50.58	6.37	-0.06	56.89	Peak (NRB)	Horizontal	151	0	--	--	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 314 of 405

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5825.00 MHz, Antenna: Aruba Networks AP-ANT-16, Power Setting: 23, Duty Cycle (%): 100

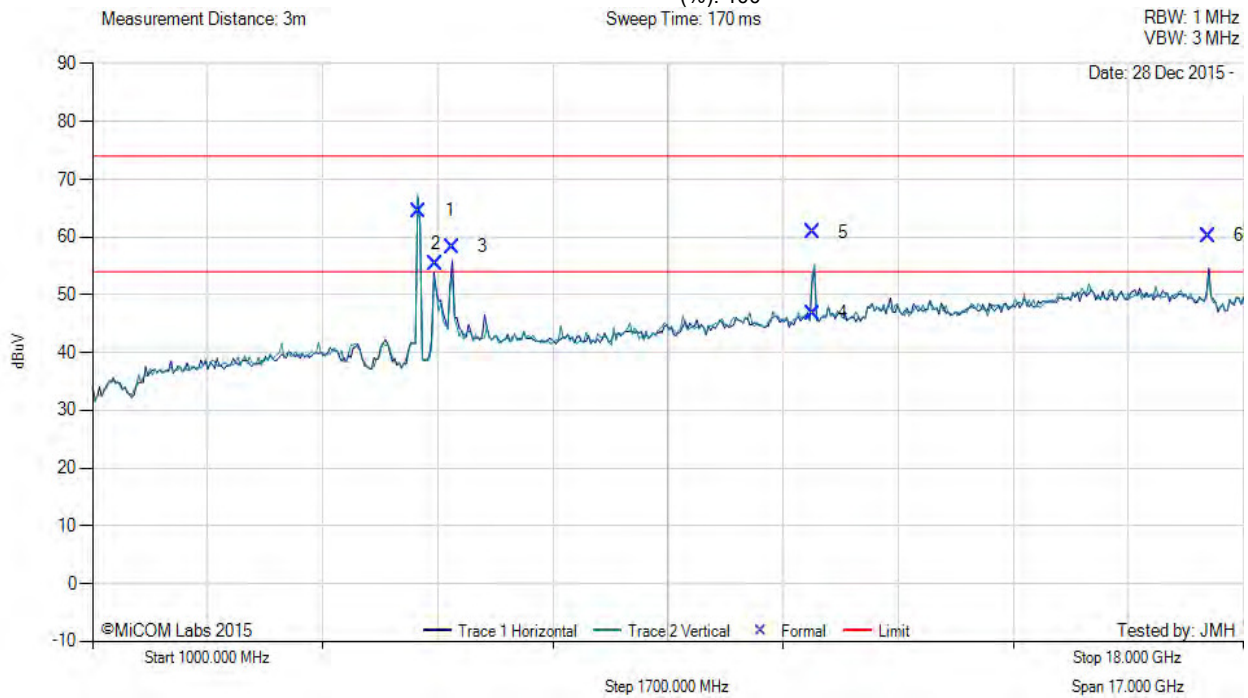

Num	Frequency MHz	Raw dB μ V	Cable Loss	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
1	5823.01	70.94	3.83	-10.25	64.52	Fundamental	Horizontal	151	28	--	--	
2	6063.24	61.01	3.89	-9.62	55.28	Peak (NRB)	Horizontal	151	28	--	--	Pass
3	6308.10	62.77	3.92	-8.39	58.30	Peak (NRB)	Horizontal	151	28	--	--	Pass
4	11641.93	45.83	5.48	-4.47	46.84	Max Avg	Vertical	139	321	54.0	-7.2	Pass
5	11641.93	59.87	5.48	-4.47	60.88	Max Peak	Vertical	139	321	74.0	-13.1	Pass
6	17481.65	54.51	6.38	-0.62	60.27	Peak (NRB)	Horizontal	151	0	--	--	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




A.3.4 Antenna AP-ANT-18

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5180.00 MHz, Antenna: Aruba Networks AP-ANT-18, Power Setting: 17.25, Duty Cycle (%): 100

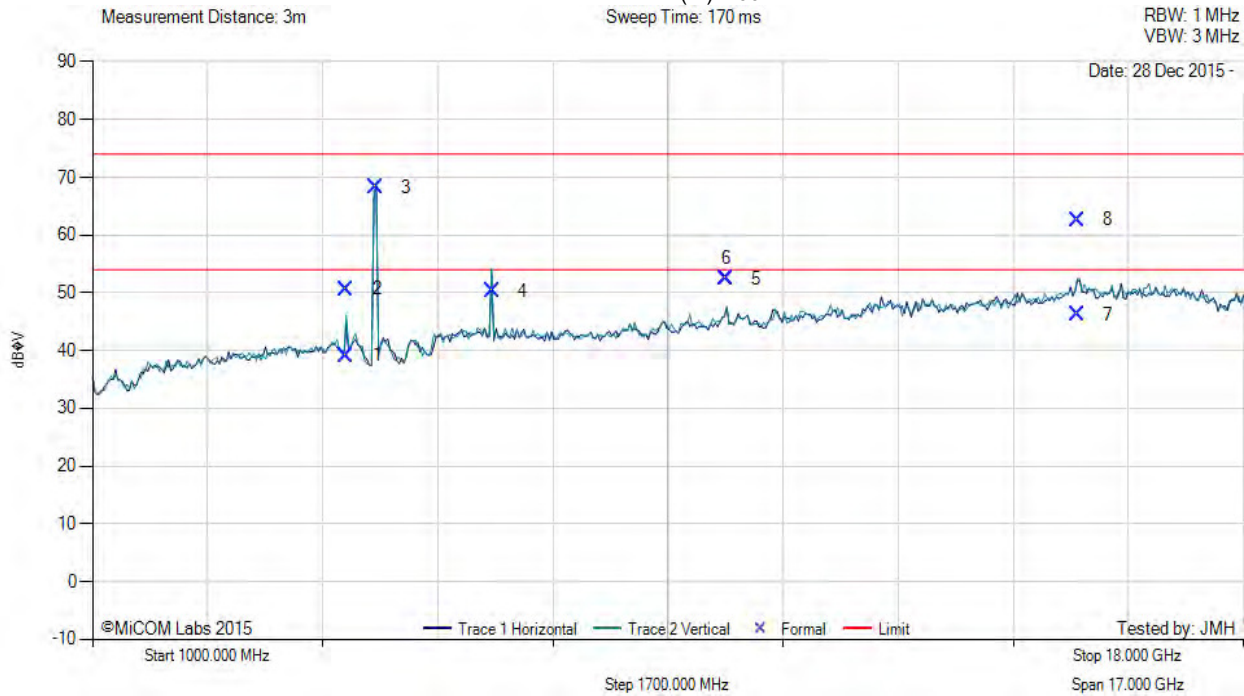

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	4752.26	46.67	3.56	-11.11	39.12	Max Avg	Vertical	143	18	54.0	-14.9	Pass
2	4752.26	58.23	3.56	-11.11	50.68	Max Peak	Vertical	143	18	74.0	-23.3	Pass
3	5184.49	76.09	3.68	-11.49	68.28	Fundamental	Vertical	151	1	--	--	
4	6906.66	53.64	4.11	-7.54	50.21	Peak (NRB)	Vertical	148	360	--	--	Pass
5	10359.77	52.09	5.57	-5.27	52.39	Peak (NRB)	Vertical	151	0	--	--	Pass
6	10359.77	52.09	5.57	-5.27	52.39	Peak (NRB)	Vertical	151	0	--	--	Pass
7	15543.04	40.80	5.97	-0.56	46.21	Max Avg	Vertical	125	187	54.0	-7.8	Pass
8	15543.04	57.25	5.97	-0.56	62.66	Max Peak	Vertical	125	187	74.0	-11.3	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 316 of 405

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5200.00 MHz, Antenna: Aruba Networks AP-ANT-18, Power Setting: 23, Duty Cycle (%): 100

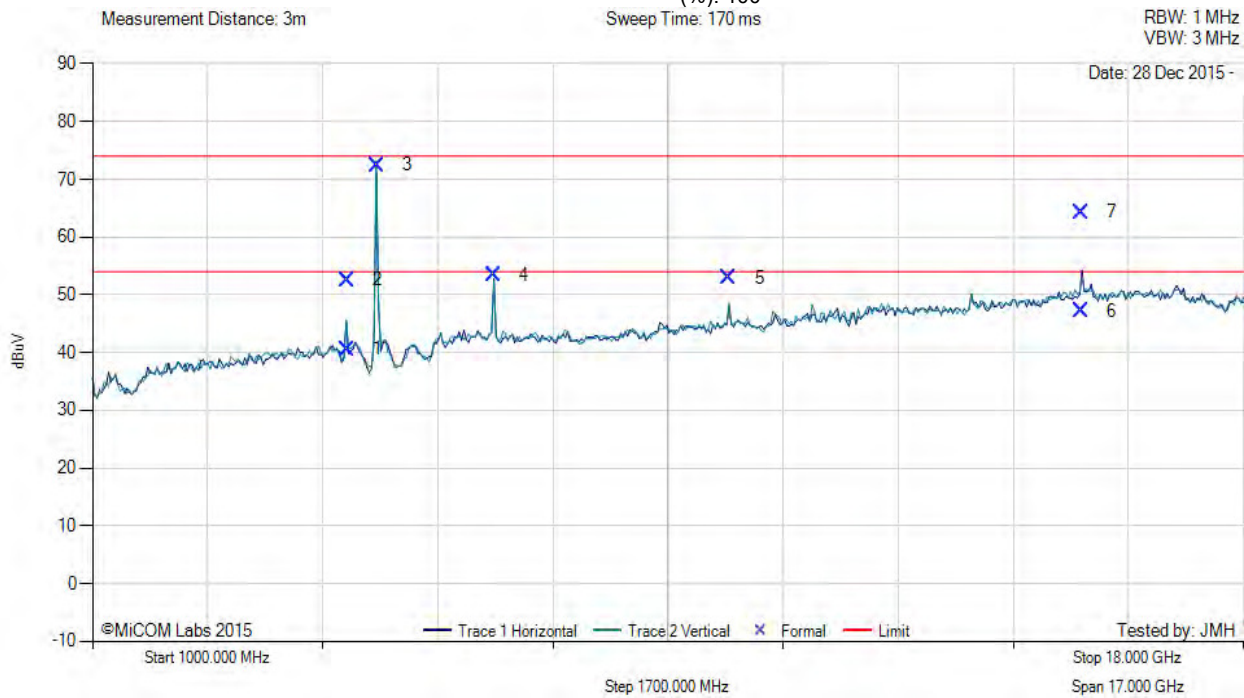

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	4759.80	48.14	3.57	-11.11	40.60	Max Avg	Vertical	151	17	54.0	-13.4	Pass
2	4759.80	60.06	3.57	-11.11	52.52	Max Peak	Vertical	151	17	74.0	-21.5	Pass
3	5196.99	80.24	3.66	-11.47	72.43	Fundamental	Vertical	151	13	--	--	
4	6933.35	56.72	4.11	-7.49	53.34	Peak (NRB)	Horizontal	151	25	--	--	Pass
5	10401.41	52.54	5.41	-5.03	52.92	Peak (NRB)	Vertical	151	0	--	--	Pass
6	15603.21	41.38	6.03	-0.22	47.19	Max Avg	Horizontal	155	235	54.0	-6.8	Pass
7	15603.21	58.48	6.03	-0.22	64.29	Max Peak	Horizontal	155	235	74.0	-9.7	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 317 of 405

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5240.00 MHz, Antenna: Aruba Networks AP-ANT-18, Power Setting: 23, Duty Cycle (%): 100

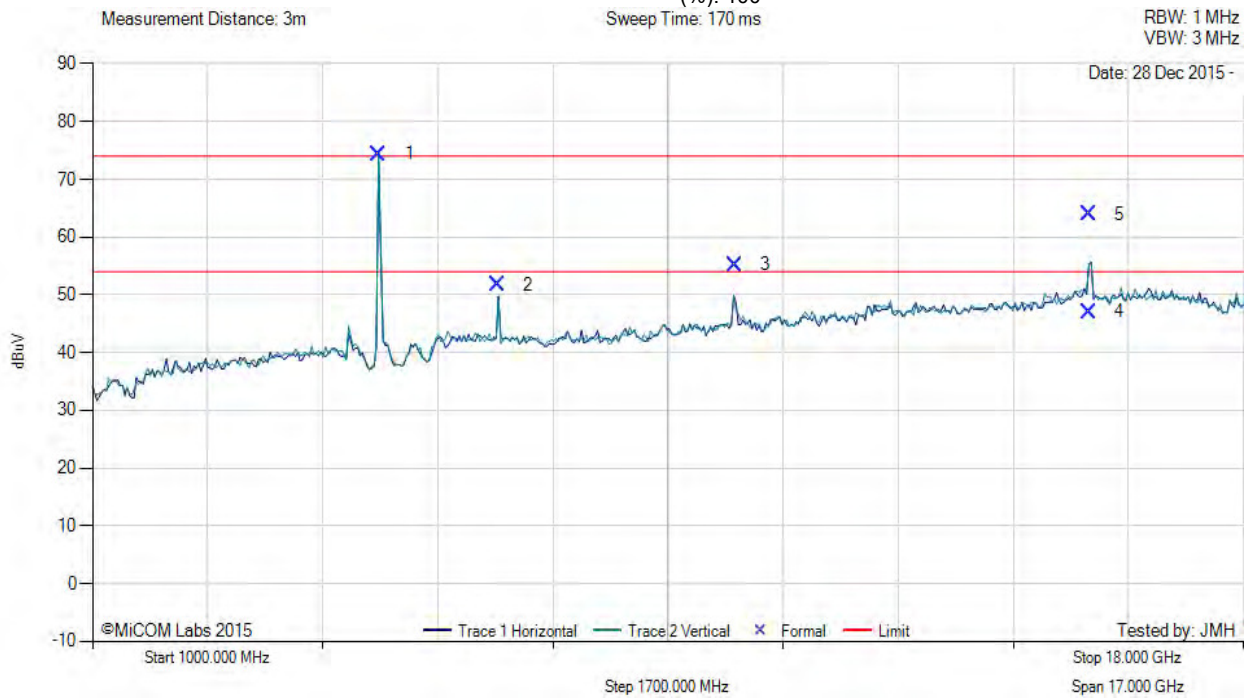

Num	Frequency MHz	Raw dB μ V	Cable Loss	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
1	5232.59	82.16	3.63	-11.39	74.40	Fundamental	Vertical	200	0	--	--	
2	6986.65	55.08	4.13	-7.45	51.76	Peak (NRB)	Horizontal	200	31	--	--	Pass
3	10486.57	54.15	5.43	-4.41	55.17	Peak (NRB)	Horizontal	200	0	--	--	Pass
4	15722.96	40.79	6.12	0.17	47.08	Max Avg	Horizontal	197	249	54.0	-6.9	Pass
5	15722.96	57.69	6.12	0.17	63.98	Max Peak	Horizontal	197	249	74.0	-10.0	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 318 of 405

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5745.00 MHz, Antenna: Aruba Networks AP-ANT-18, Power Setting: 23, Duty Cycle (%): 100

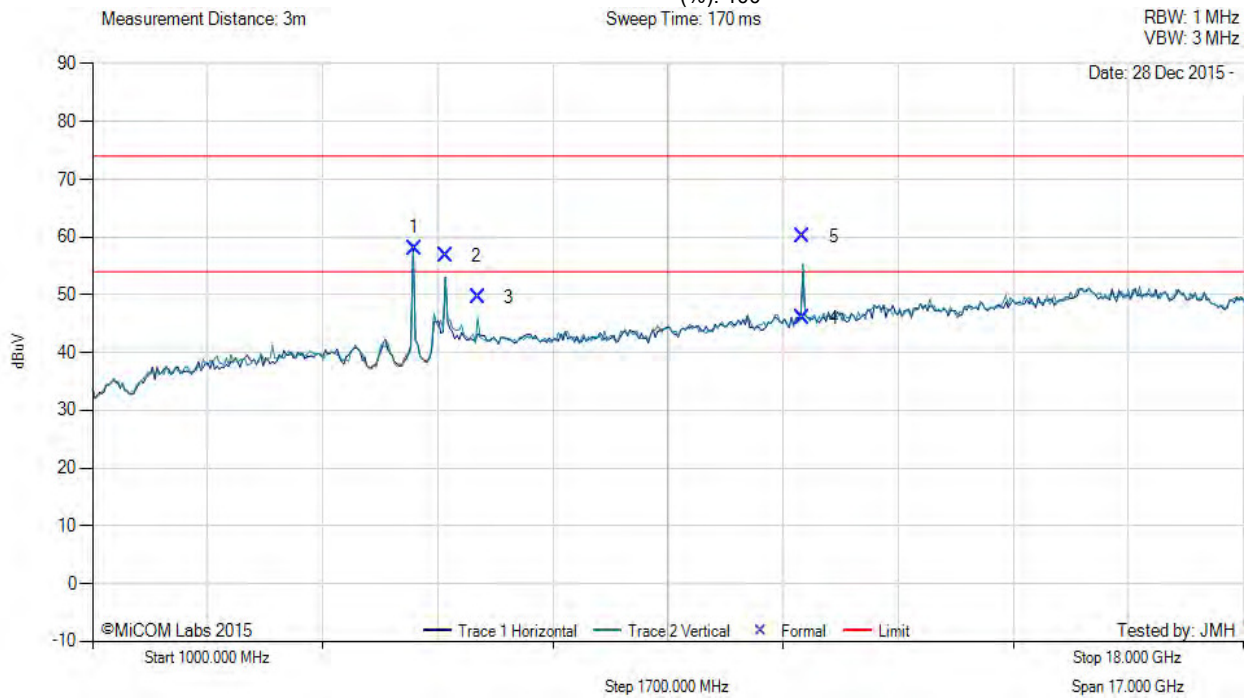

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5750.78	64.90	3.84	-10.63	58.11	Fundamental	Horizontal	151	26	--	--	
2	6219.59	61.57	3.92	-8.78	56.71	Peak (NRB)	Horizontal	148	0	--	--	Pass
3	6702.56	53.54	4.04	-7.95	49.63	Peak (NRB)	Vertical	148	360	--	--	Pass
4	11492.79	45.44	5.44	-4.84	46.04	Max Avg	Vertical	140	339	54.0	-8.0	Pass
5	11492.79	59.48	5.44	-4.84	60.08	Max Peak	Vertical	140	339	74.0	-13.9	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 319 of 405

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5785.00 MHz, Antenna: Aruba Networks AP-ANT-18, Power Setting: 23, Duty Cycle (%): 100

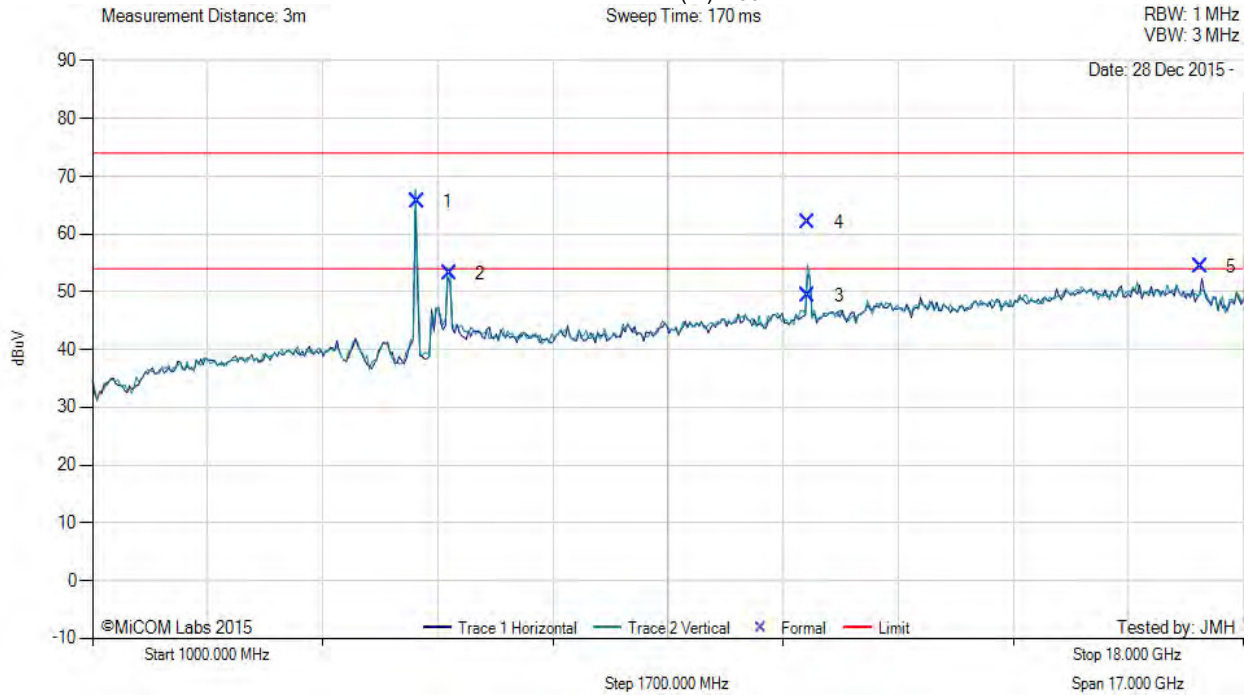

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5789.30	72.21	3.79	-10.42	65.58	Fundamental	Vertical	151	1	--	--	
2	6267.17	57.74	3.93	-8.52	53.15	Peak (NRB)	Vertical	151	1	--	--	Pass
3	11570.82	48.58	5.44	-4.64	49.38	Max Avg	Vertical	192	357	54.0	-4.6	Pass
4	11570.82	61.26	5.44	-4.64	62.06	Max Peak	Vertical	192	357	74.0	-11.9	Pass
5	17359.03	48.12	6.28	-0.04	54.36	Peak (NRB)	Horizontal	151	0	--	--	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 320 of 405

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5825.00 MHz, Antenna: Aruba Networks AP-ANT-18, Power Setting: 23, Duty Cycle (%): 100

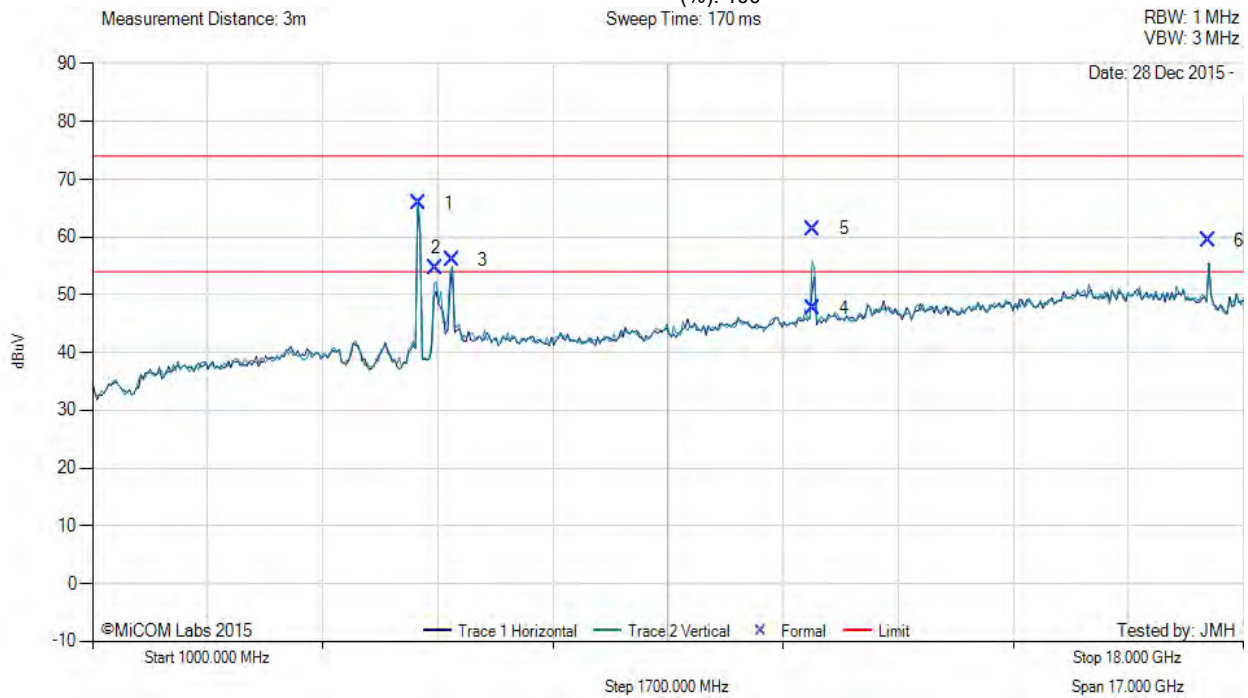

Num	Frequency MHz	Raw dB μ V	Cable Loss	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
1	5819.44	72.27	3.82	-10.28	65.81	Fundamental	Vertical	151	1	--	--	
2	6069.22	60.30	3.88	-9.60	54.58	Peak (NRB)	Vertical	151	1	--	--	Pass
3	6310.50	60.47	3.91	-8.37	56.01	Peak (NRB)	Horizontal	151	1	--	--	Pass
4	11649.02	46.71	5.44	-4.47	47.68	Max Avg	Vertical	197	1	54.0	-6.3	Pass
5	11649.02	60.49	5.44	-4.47	61.46	Max Peak	Vertical	197	1	74.0	-12.5	Pass
6	17479.00	53.63	6.33	-0.60	59.36	Peak (NRB)	Horizontal	151	1	--	--	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




A.3.5 Antenna AP-ANT-19

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5180.00 MHz, Antenna: Aruba Networks AP-ANT-19, Power Setting: 23, Duty Cycle (%): 100

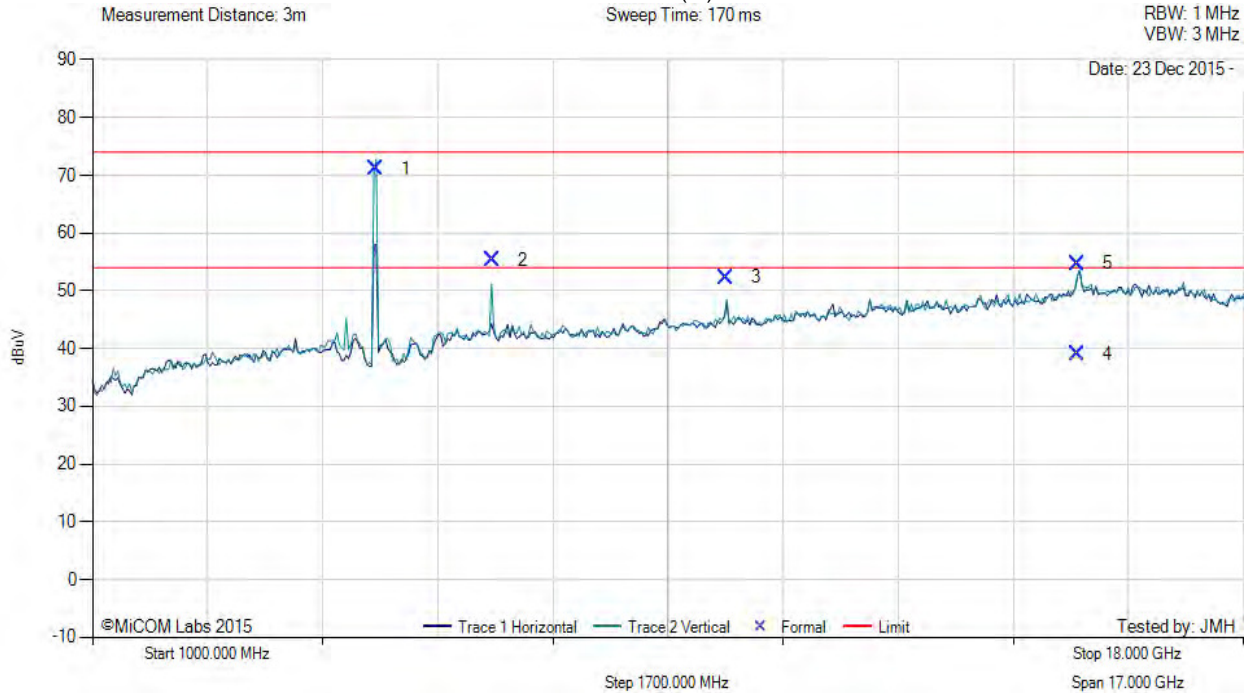

Num	Frequency MHz	Raw dB μ V	Cable Loss	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
1	5183.53	78.89	3.68	-11.49	71.08	Fundamental	Vertical	151	1	--	--	
2	6906.64	58.79	4.11	-7.54	55.36	Peak (NRB)	Vertical	151	1	--	--	Pass
3	10362.05	52.00	5.58	-5.26	52.32	Peak (NRB)	Vertical	151	1	--	--	Pass
4	15543.48	33.68	5.97	-0.56	39.09	Max Avg	Horizontal	168	277	54.0	-14.9	Pass
5	15543.48	49.34	5.97	-0.56	54.75	Max Peak	Horizontal	168	277	74.0	-19.3	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 322 of 405

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5200.00 MHz, Antenna: Aruba Networks AP-ANT-19, Power Setting: 23, Duty Cycle (%): 100

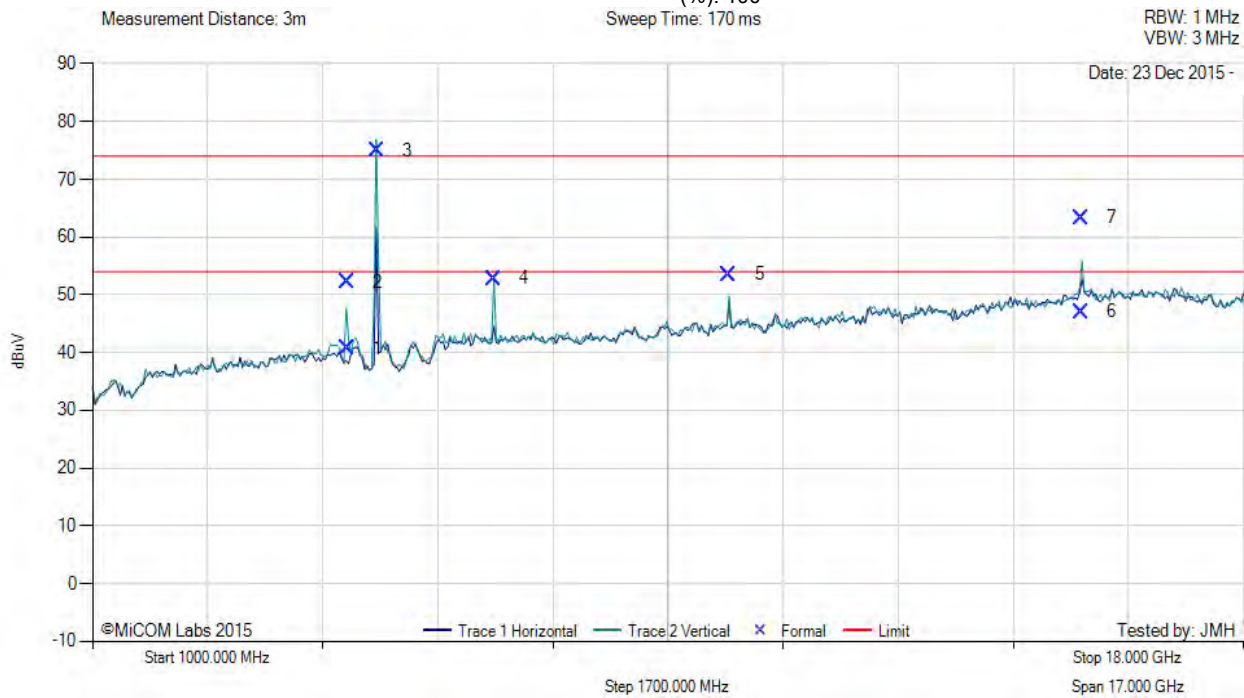

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	4764.93	48.22	3.59	-11.11	40.70	Max Avg	Vertical	169	347	54.0	-13.3	Pass
2	4764.93	59.67	3.59	-11.11	52.15	Max Peak	Vertical	169	347	74.0	-21.9	Pass
3	5202.68	82.81	3.65	-11.45	75.01	Fundamental	Vertical	151	1	--	--	
4	6933.43	56.20	4.11	-7.49	52.82	Peak (NRB)	Vertical	151	49	--	--	Pass
5	10403.25	53.15	5.42	-5.02	53.55	Peak (NRB)	Vertical	151	49	--	--	Pass
6	15603.41	41.20	6.03	-0.22	47.01	Max Avg	Vertical	154	315	54.0	-7.0	Pass
7	15603.41	57.55	6.03	-0.22	63.36	Max Peak	Vertical	154	315	74.0	-10.6	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 323 of 405

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5240.00 MHz, Antenna: Aruba Networks AP-ANT-19, Power Setting: 23, Duty Cycle (%): 100

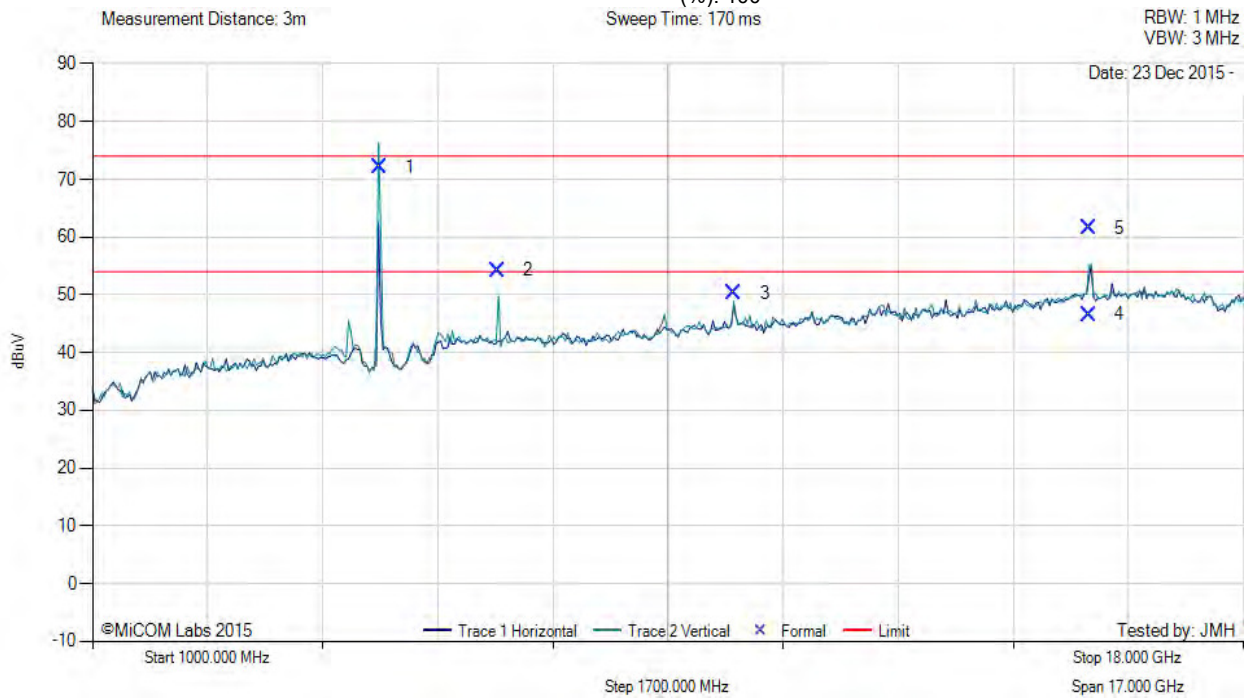

Num	Frequency MHz	Raw dB μ V	Cable Loss	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
1	5238.04	79.76	3.63	-11.37	72.02	Fundamental	Vertical	151	1	--	--	
2	6986.73	57.58	4.13	-7.45	54.26	Peak (NRB)	Vertical	151	14	--	--	Pass
3	10480.12	49.36	5.42	-4.46	50.32	Peak (NRB)	Vertical	151	0	--	--	Pass
4	15722.56	40.32	6.12	0.17	46.61	Max Avg	Vertical	187	111	54.0	-7.4	Pass
5	15722.56	55.25	6.12	0.17	61.54	Max Peak	Vertical	187	111	74.0	-12.5	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 324 of 405

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5745.00 MHz, Antenna: Aruba Networks AP-ANT-19, Power Setting: 23, Duty Cycle (%): 100

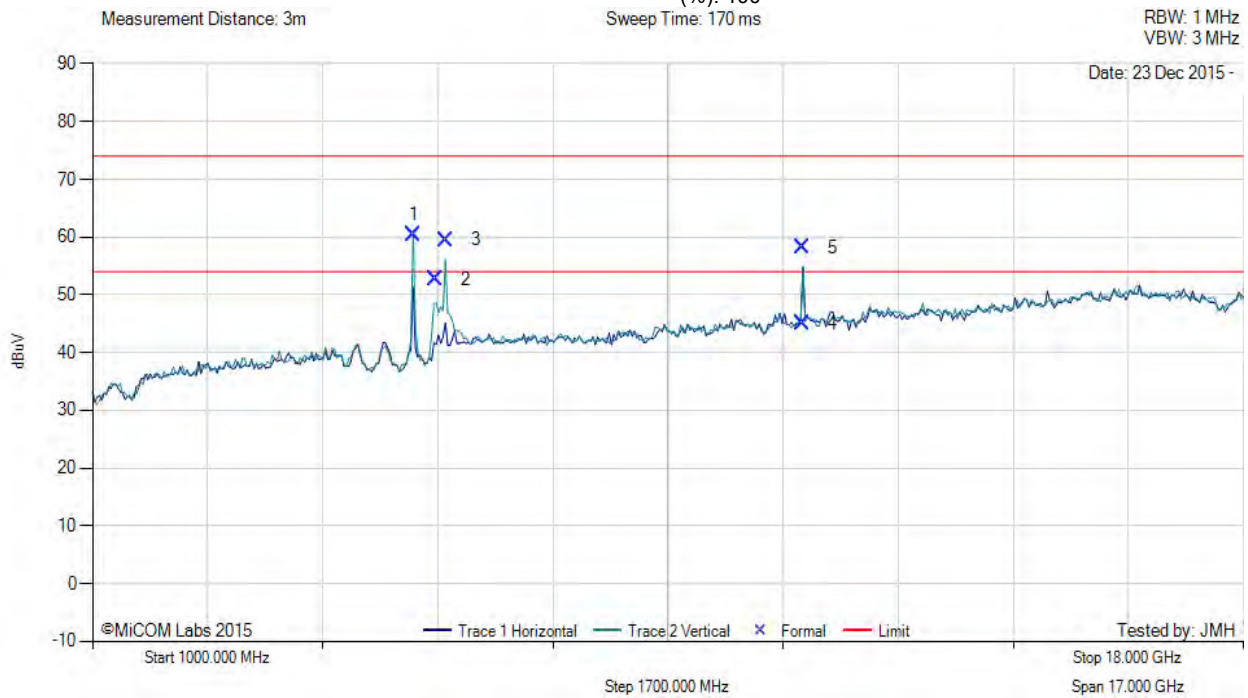

Num	Frequency MHz	Raw dB μ V	Cable Loss	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
1	5739.52	67.22	3.83	-10.67	60.38	Fundamental	Vertical	151	1	--	--	
2	6069.38	58.43	3.88	-9.60	52.71	Peak (NRB)	Vertical	151	1	--	--	Pass
3	6219.27	64.35	3.92	-8.78	59.49	Peak (NRB)	Vertical	151	1	--	--	Pass
4	11491.59	44.43	5.44	-4.84	45.03	Max Avg	Horizontal	156	13	54.0	-9.0	Pass
5	11491.59	57.62	5.44	-4.84	58.22	Max Peak	Horizontal	156	13	74.0	-15.8	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5785.00 MHz, Antenna: Aruba Networks AP-ANT-19, Power Setting: 23, Duty Cycle (%): 100

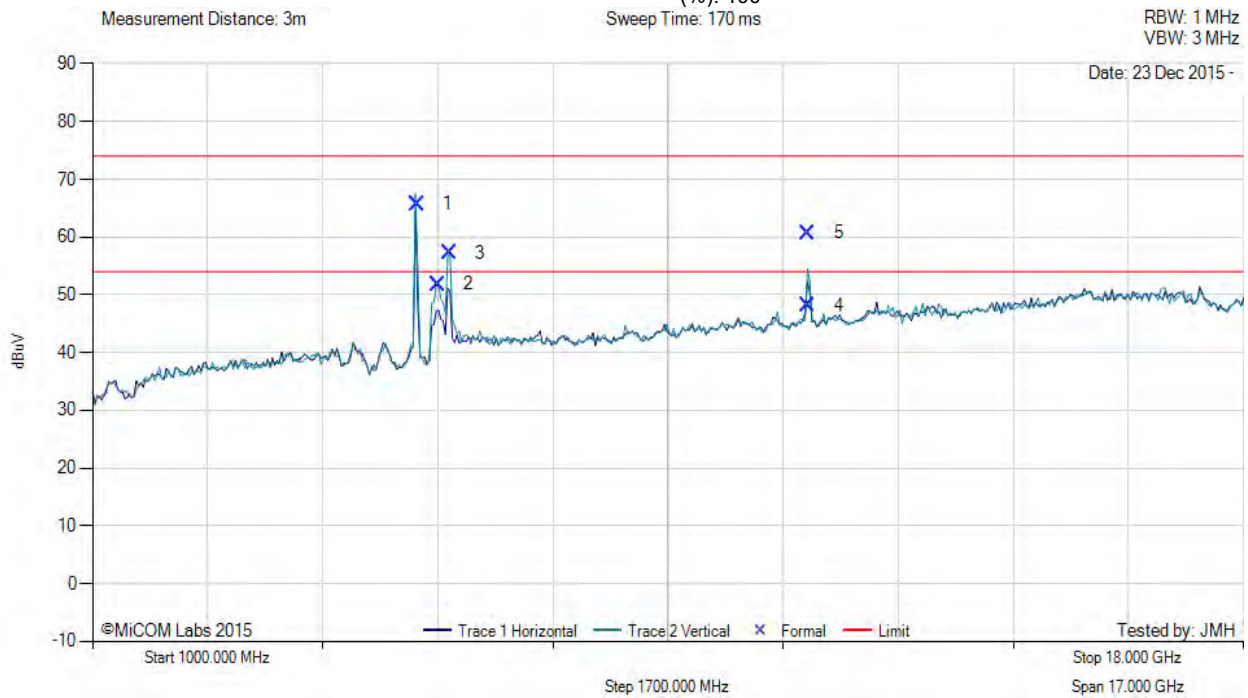

Num	Frequency MHz	Raw dB μ V	Cable Loss	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
1	5789.22	72.36	3.79	-10.42	65.73	Fundamental	Vertical	101	1	--	--	
2	6099.52	57.46	3.88	-9.51	51.83	Peak (NRB)	Vertical	151	1	--	--	Pass
3	6272.98	61.74	3.92	-8.50	57.16	Peak (NRB)	Vertical	151	1	--	--	Pass
4	11571.90	47.27	5.42	-4.63	48.06	Max Avg	Vertical	110	322	54.0	-5.9	Pass
5	11571.90	59.89	5.42	-4.63	60.68	Max Peak	Vertical	110	322	74.0	-13.3	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 326 of 405

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5825.00 MHz, Antenna: Aruba Networks AP-ANT-19, Power Setting: 23, Duty Cycle (%): 100

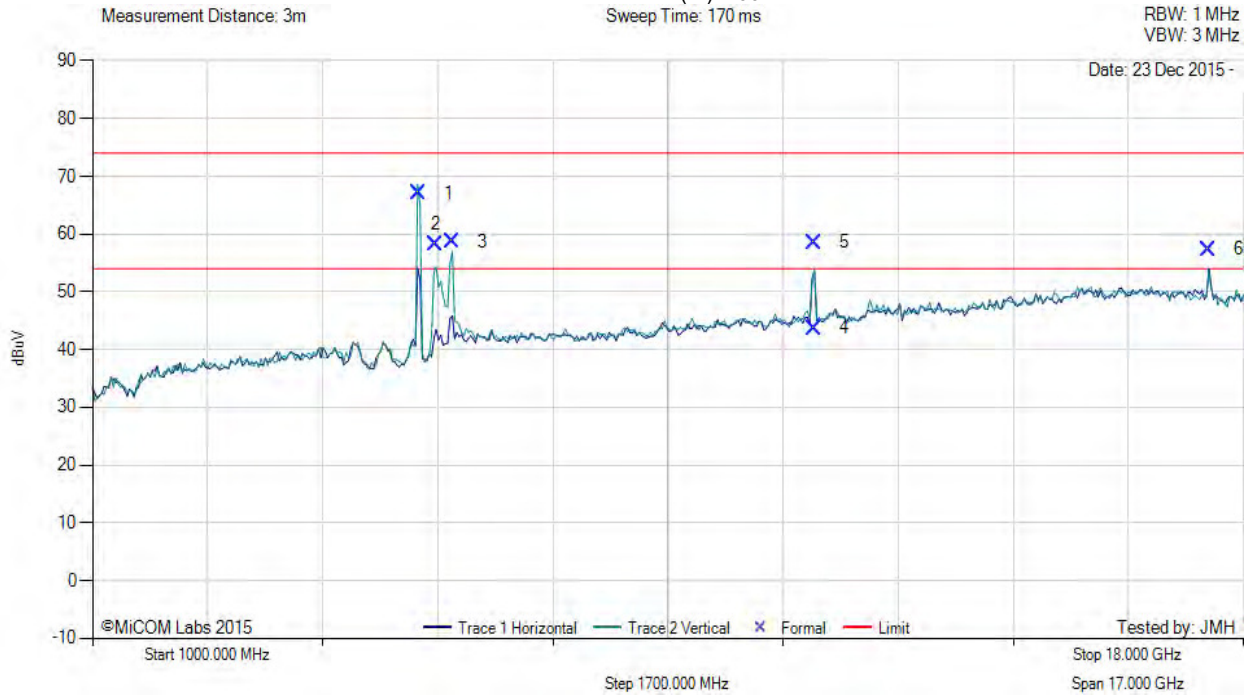

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5819.36	73.50	3.82	-10.28	67.04	Fundamental	Vertical	101	1	--	--	
2	6070.18	63.98	3.88	-9.60	58.26	Peak (NRB)	Vertical	151	1	--	--	Pass
3	6310.10	63.10	3.91	-8.37	58.64	Peak (NRB)	Vertical	151	1	--	--	Pass
4	11652.59	42.70	5.49	-4.46	43.73	Max Avg	Vertical	114	324	54.0	-10.3	Pass
5	11652.59	57.53	5.49	-4.46	58.56	Max Peak	Vertical	114	324	74.0	-15.4	Pass
6	17478.28	51.64	6.31	-0.60	57.35	Peak (NRB)	Vertical	151	1	--	--	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




A.3.6 Antenna Integral (APIN0225)

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5180.00 MHz, Antenna: Aruba Networks Metal Sheet, Power Setting: 23, Duty Cycle (%): 100

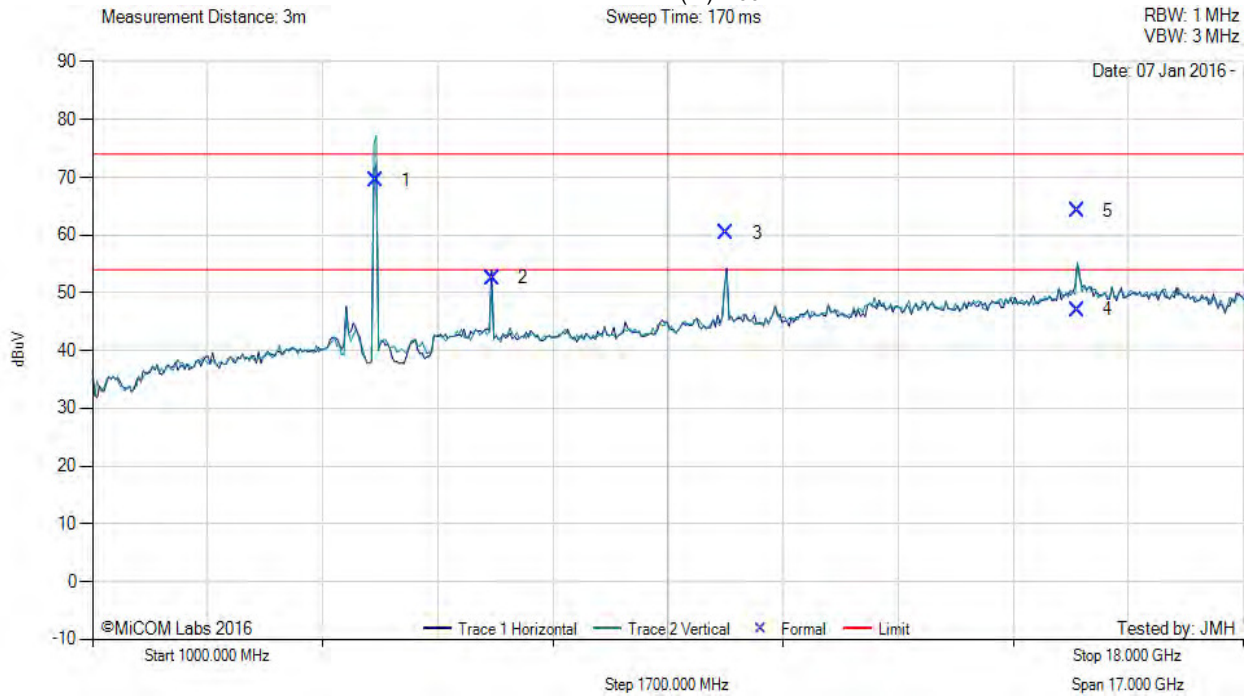

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	5187.37	77.32	3.68	-11.49	69.51	Fundamental	Vertical	101	64	--	--	
2	6906.61	55.96	4.11	-7.54	52.53	Peak (NRB)	Horizontal	151	64	--	--	Pass
3	10362.53	60.04	5.58	-5.25	60.37	Peak (NRB)	Horizontal	151	64	--	--	Pass
4	15543.04	41.68	5.97	-0.56	47.09	Max Avg	Horizontal	191	202	54.0	-6.9	Pass
5	15543.04	58.72	5.97	-0.56	64.13	Max Peak	Horizontal	191	202	74.0	-9.9	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 328 of 405

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5200.00 MHz, Antenna: Aruba Networks Metal Sheet, Power Setting: 23, Duty Cycle (%): 100

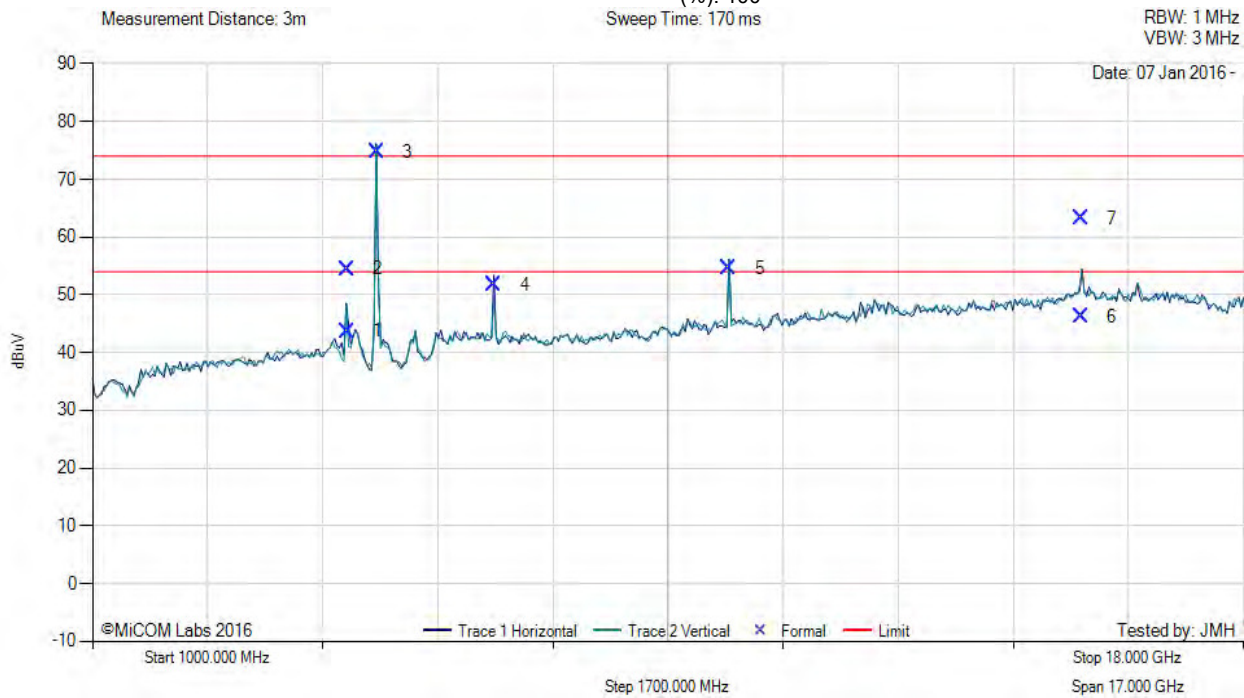

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	4768.09	51.18	3.61	-11.12	43.67	Max Avg	Horizontal	157	76	54.0	-10.3	Pass
2	4768.09	62.00	3.61	-11.12	54.49	Max Peak	Horizontal	157	76	74.0	-19.5	Pass
3	5198.60	82.52	3.66	-11.47	74.71	Fundamental	Horizontal	151	119	--	--	
4	6933.51	55.16	4.11	-7.49	51.78	Peak (NRB)	Horizontal	151	119	--	--	Pass
5	10402.53	54.25	5.42	-5.02	54.65	Peak (NRB)	Horizontal	151	119	--	--	Pass
6	15603.29	40.37	6.03	-0.22	46.18	Max Avg	Horizontal	169	239	54.0	-7.8	Pass
7	15603.29	57.41	6.03	-0.22	63.22	Max Peak	Horizontal	169	239	74.0	-10.8	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 329 of 405

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5240.00 MHz, Antenna: Aruba Networks Metal Sheet, Power Setting: 23, Duty Cycle (%): 100

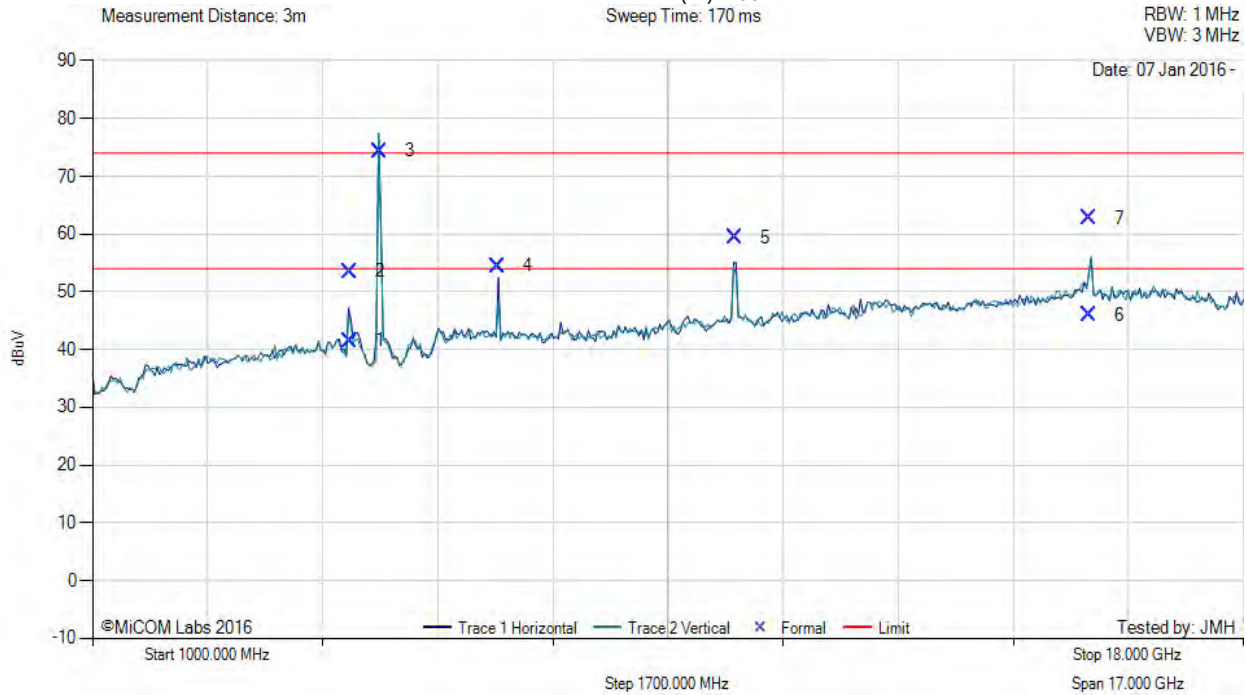

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	4796.43	49.11	3.53	-11.11	41.53	Max Avg	Horizontal	133	320	54.0	-12.5	Pass
2	4796.43	61.06	3.53	-11.11	53.48	Max Peak	Horizontal	133	320	74.0	-20.5	Pass
3	5240.84	82.10	3.63	-11.36	74.37	Fundamental	Horizontal	101	39	--	--	
4	6986.57	57.84	4.13	-7.45	54.52	Peak (NRB)	Horizontal	151	92	--	--	Pass
5	10482.60	58.42	5.40	-4.44	59.38	Peak (NRB)	Horizontal	151	92	--	--	Pass
6	15723.20	39.75	6.12	0.17	46.04	Max Avg	Horizontal	186	200	54.0	-8.0	Pass
7	15723.20	56.51	6.12	0.17	62.80	Max Peak	Horizontal	186	200	74.0	-11.2	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 330 of 405

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5745.00 MHz, Antenna: Aruba Networks Metal Sheet, Power Setting: 21, Duty Cycle (%): 100

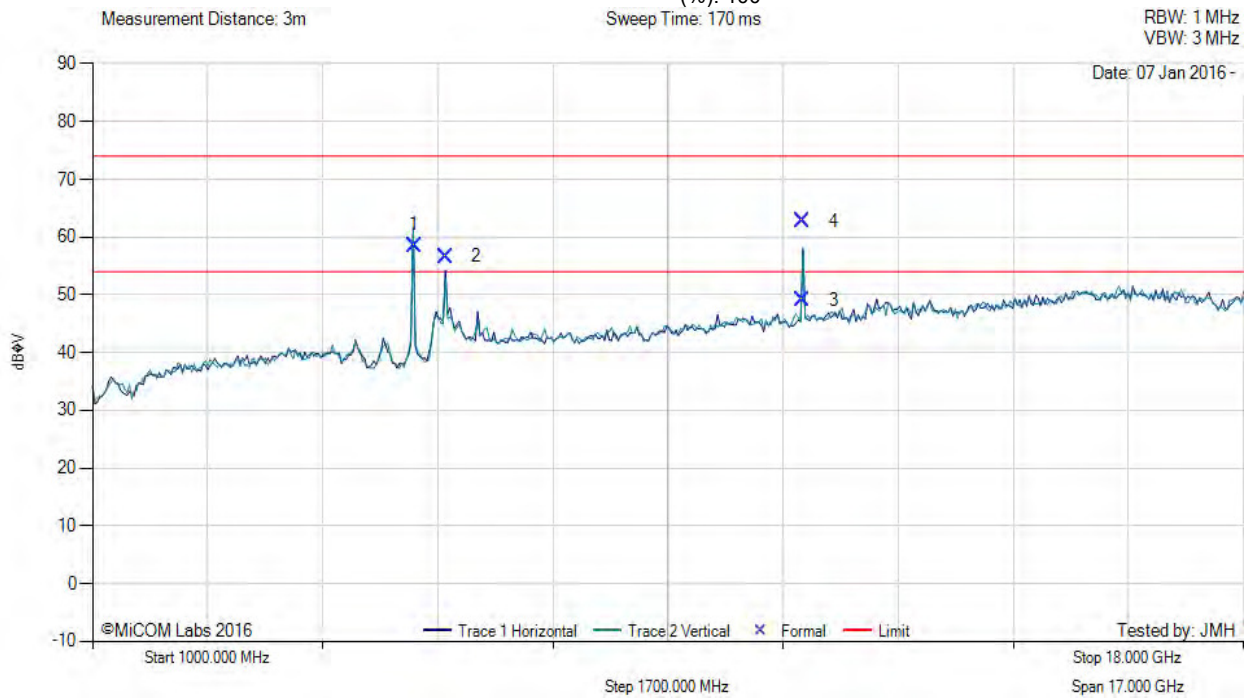

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5750.10	65.37	3.85	-10.63	58.59	Peak (NRB)	Horizontal	151	43	--	--	Pass
2	6223.92	61.50	3.92	-8.75	56.67	Peak (NRB)	Horizontal	151	43	--	--	Pass
3	11493.75	48.55	5.44	-4.84	49.15	Max Avg	Horizontal	157	98	54.0	-4.9	Pass
4	11493.75	62.07	5.44	-4.84	62.67	Max Peak	Horizontal	157	98	74.0	-11.3	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE. Power reduction to 21 failing harm with 23

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 331 of 405

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5785.00 MHz, Antenna: Aruba Networks Metal Sheet, Power Setting: 23, Duty Cycle (%): 100

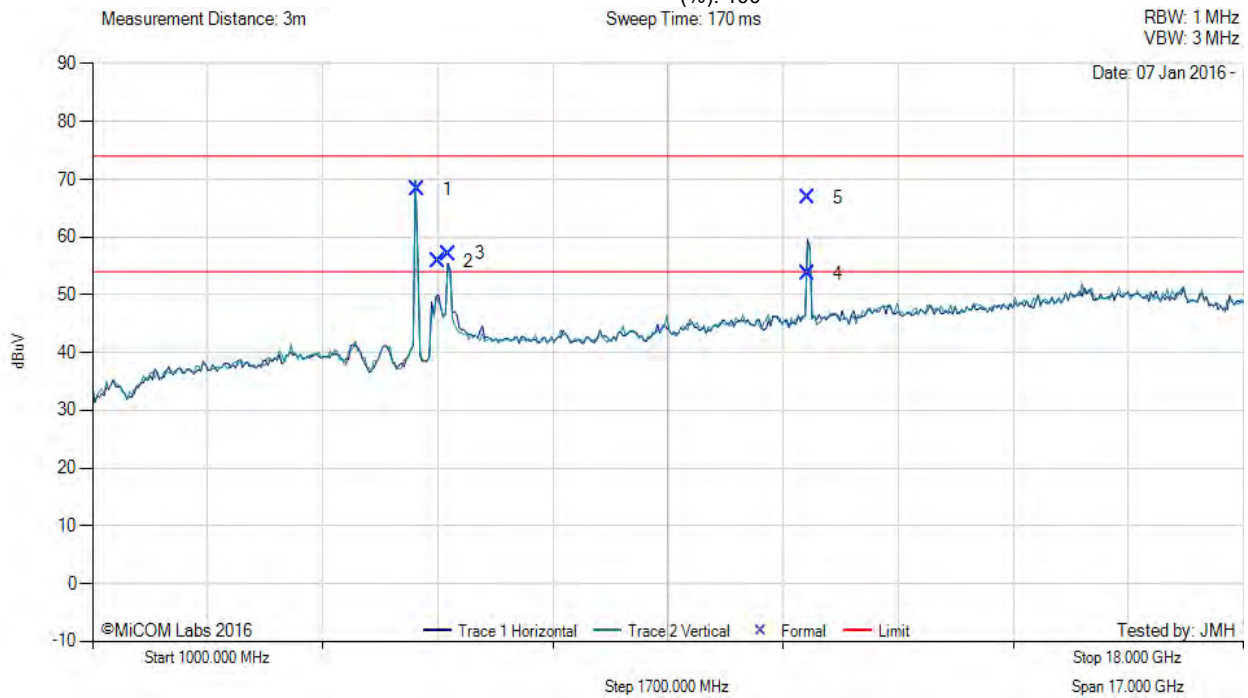

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5788.98	74.92	3.79	-10.42	68.29	Fundamental	Horizontal	151	77	--	--	
2	6100.08	61.42	3.88	-9.51	55.79	Peak (NRB)	Horizontal	148	77	--	--	Pass
3	6264.01	61.69	3.93	-8.53	57.09	Peak (NRB)	Horizontal	148	77	--	--	Pass
4	11569.18	52.75	5.48	-4.65	53.58	Max Avg	Horizontal	160	78	54.0	-0.4	Pass
5	11569.18	65.93	5.48	-4.65	66.76	Max Peak	Horizontal	160	78	74.0	-7.2	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 332 of 405

RADIATED SPURIOUS - RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5825.00 MHz, Antenna: Aruba Networks Metal Sheet, Power Setting: 23, Duty Cycle (%): 100

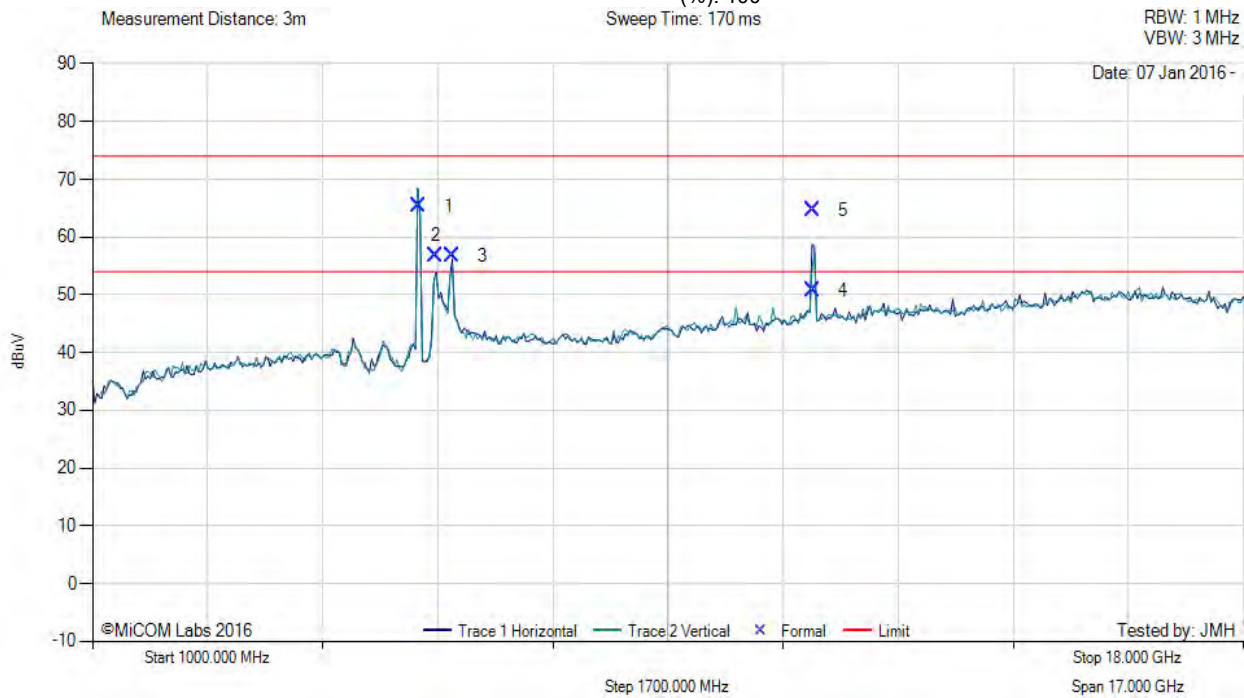

Num	Frequency MHz	Raw dB μ V	Cable Loss	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
1	5819.52	71.79	3.83	-10.26	65.36	Fundamental	Horizontal	151	25	--	--	
2	6065.53	62.56	3.88	-9.61	56.83	Peak (NRB)	Horizontal	151	39	--	--	Pass
3	6307.54	61.27	3.92	-8.39	56.80	Peak (NRB)	Horizontal	151	25	--	--	Pass
4	11644.93	49.81	5.46	-4.47	50.80	Max Avg	Horizontal	146	87	54.0	-3.2	Pass
5	11644.93	63.63	5.46	-4.47	64.62	Max Peak	Horizontal	146	87	74.0	-9.4	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




A.4. Restricted Band-Edge Emissions

A.4.1 Antenna AP-ANT-1B



RESTRICTED LOWER BAND-EDGE EMISSIONS

Variant: 802.11a, Test Freq: 5180.00 MHz, Antenna: Aruba Networks AP-ANT-1B, Power Setting: 13.25, Duty Cycle (%): 100

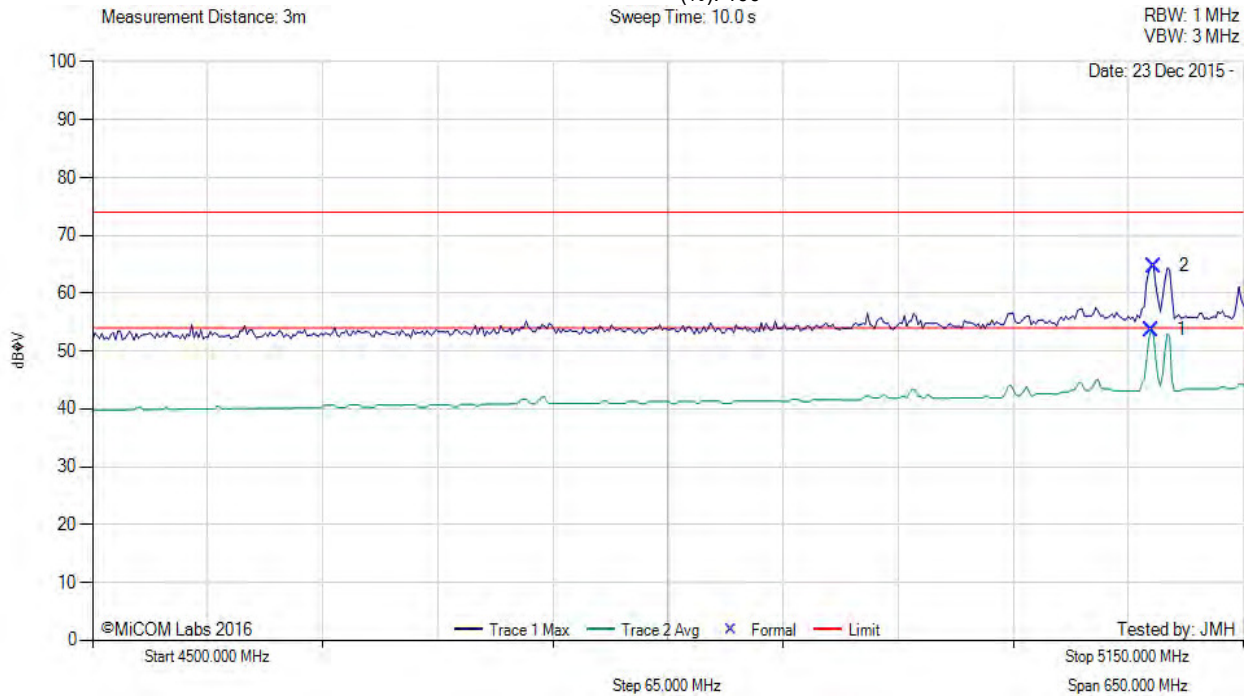

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5097.90	16.00	3.58	34.13	53.71	Max Avg	Vertical	165	359	54.0	-0.3	Pass
2	5099.20	27.00	3.58	34.13	64.71	Max Peak	Vertical	165	359	74.0	-9.3	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 334 of 405

RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11ac-80, Test Freq: 5210.00 MHz, Antenna: Aruba Networks AP-ANT-1B, Power Setting: 16.5, Duty Cycle (%): 100

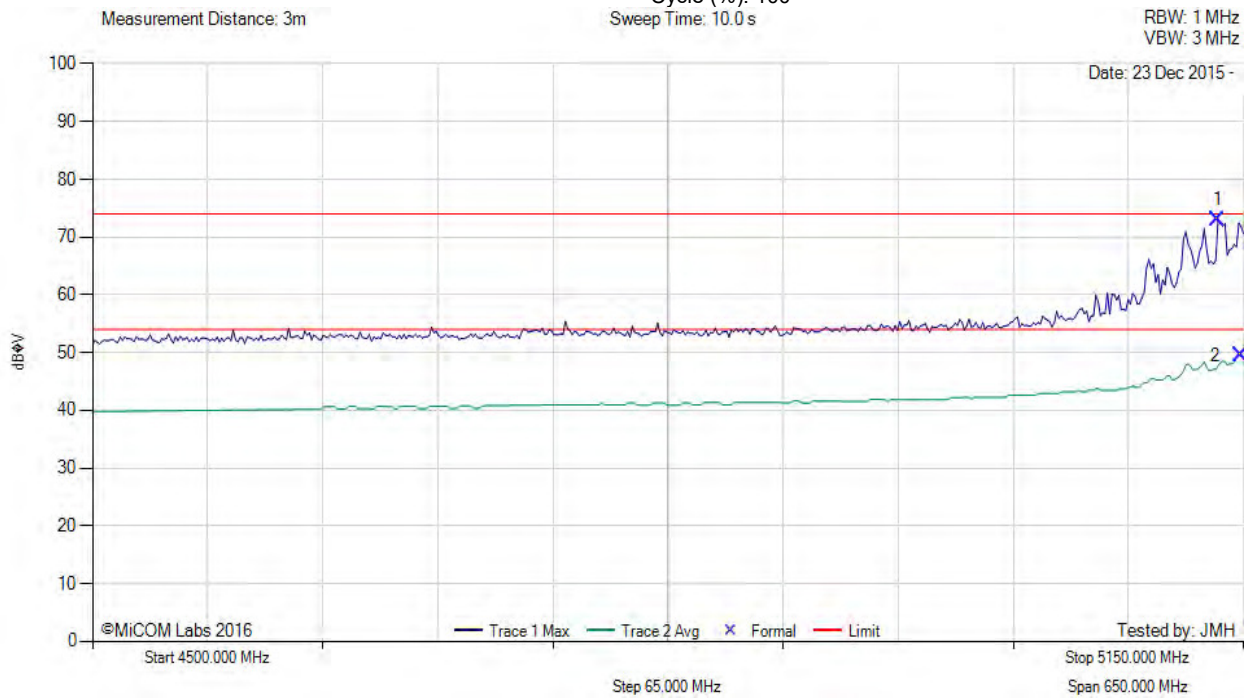

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5135.67	35.13	3.69	34.12	72.94	Max Peak	Vertical	165	359	74.0	-1.1	Pass
2	5148.70	11.75	3.67	34.11	49.53	Max Avg	Vertical	165	359	54.0	-4.5	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 335 of 405

RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11n HT-20, Test Freq: 5180.00 MHz, Antenna: Aruba Networks AP-ANT-1B, Power Setting: 19, Duty Cycle (%): 100

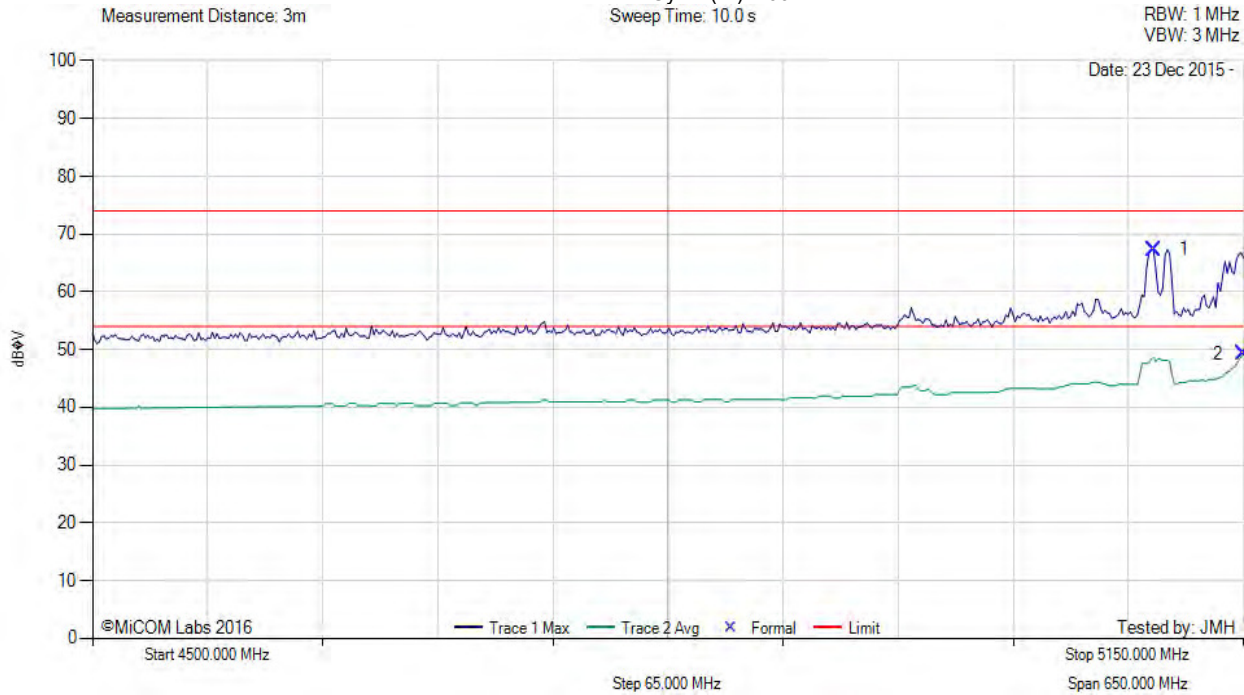

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5099.20	29.65	3.58	34.13	67.36	Max Peak	Vertical	165	359	74.0	-6.6	Pass
2	5150.00	11.45	3.67	34.11	49.23	Max Avg	Vertical	165	359	54.0	-4.8	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 336 of 405

RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11n HT-40, Test Freq: 5190.00 MHz, Antenna: Aruba Networks AP-ANT-1B, Power Setting: 16.75, Duty Cycle (%): 100

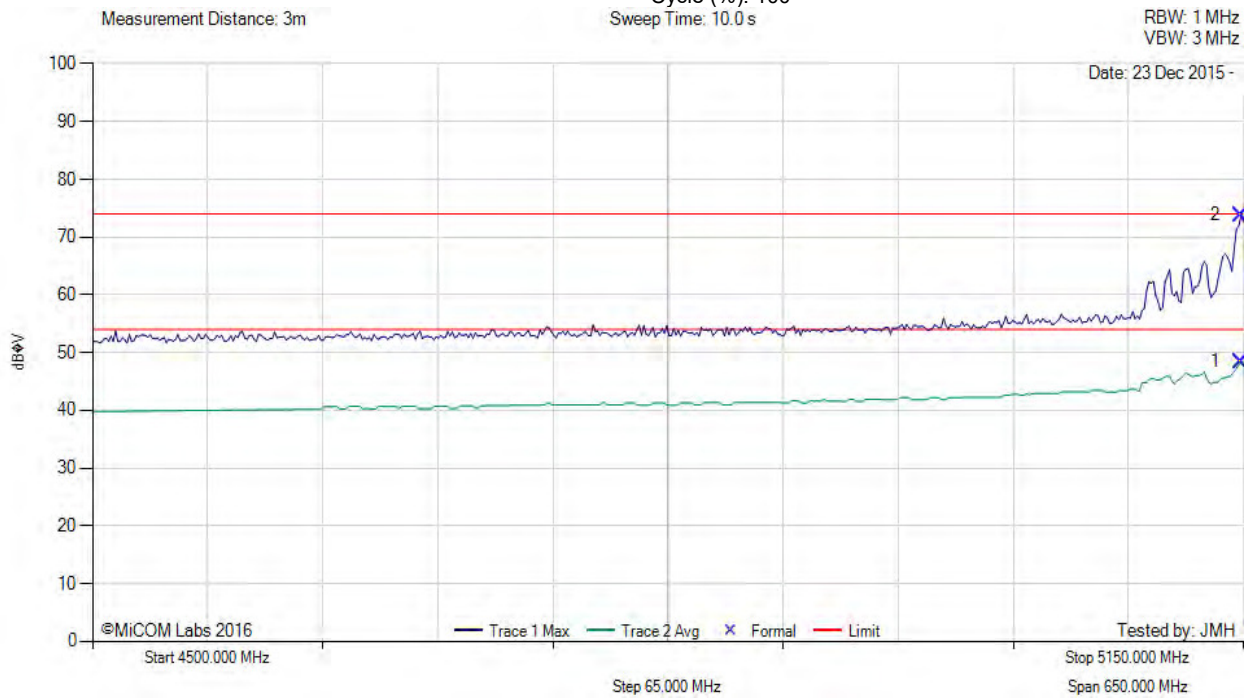

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5148.70	10.63	3.67	34.11	48.41	Max Avg	Vertical	165	359	54.0	-5.6	Pass
2	5148.70	36.02	3.67	34.11	73.80	Max Peak	Vertical	165	359	74.0	-0.2	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 337 of 405

5725 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11a, Test Freq: 5745.00 MHz, Antenna: Aruba Networks AP-ANT-1B, Power Setting: 21, Duty Cycle (%): 100

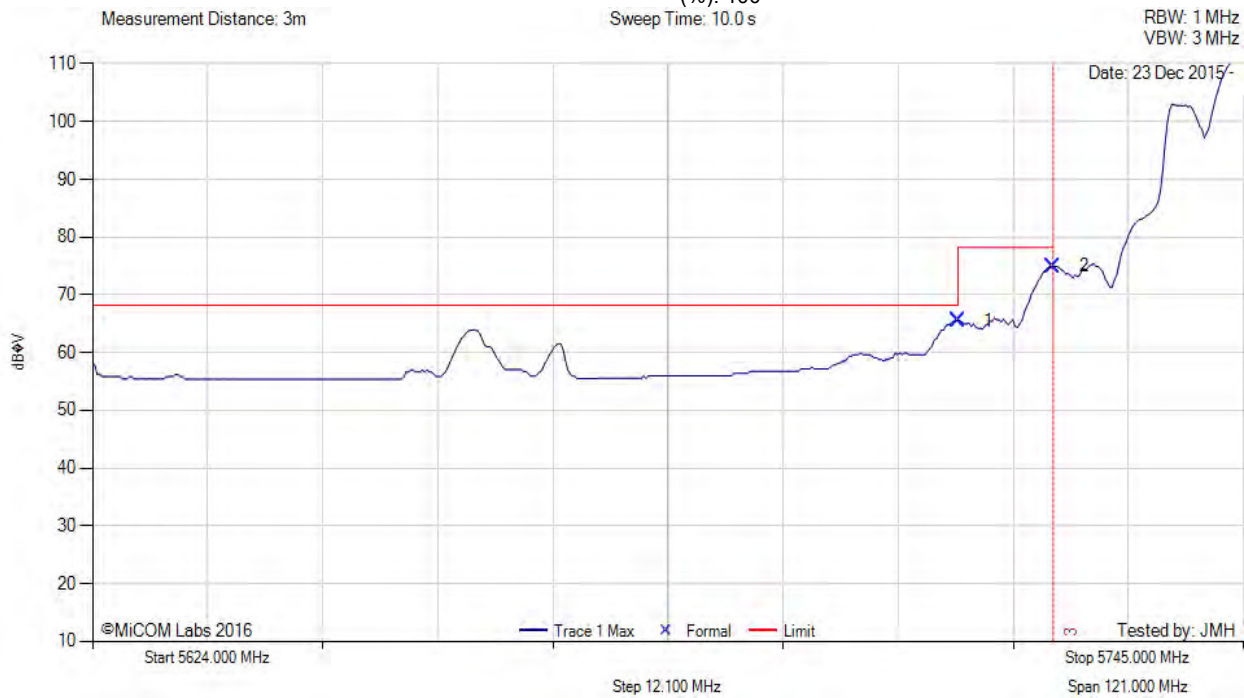

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5715.00	27.41	3.81	34.34	65.56	Marker	Vertical	160	3	68.2	-2.7	Pass
2	5725.00	36.79	3.79	34.35	74.93	Marker	Vertical	160	3	78.2	-3.3	Pass
3	5725.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 338 of 405

5725 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11ac-80, Test Freq: 5775.00 MHz, Antenna: Aruba Networks AP-ANT-1B, Power Setting: 22, Duty Cycle (%): 100

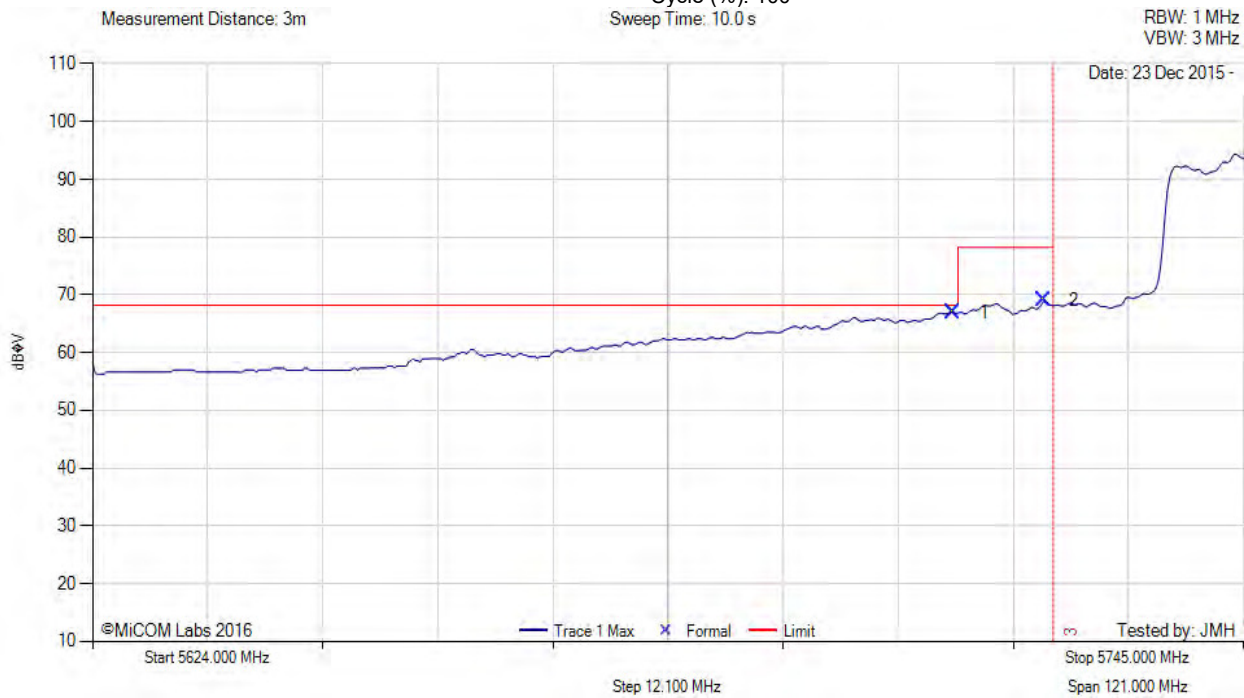

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5714.52	28.80	3.81	34.34	66.95	Marker	Vertical	160	3	68.2	-1.3	Pass
2	5724.03	30.91	3.79	34.35	69.05	Marker	Vertical	160	3	78.2	-9.2	Pass
3	5725.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 339 of 405

5725 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11n HT-20, Test Freq: 5745.00 MHz, Antenna: Aruba Networks AP-ANT-1B, Power Setting: 23, Duty Cycle (%): 100

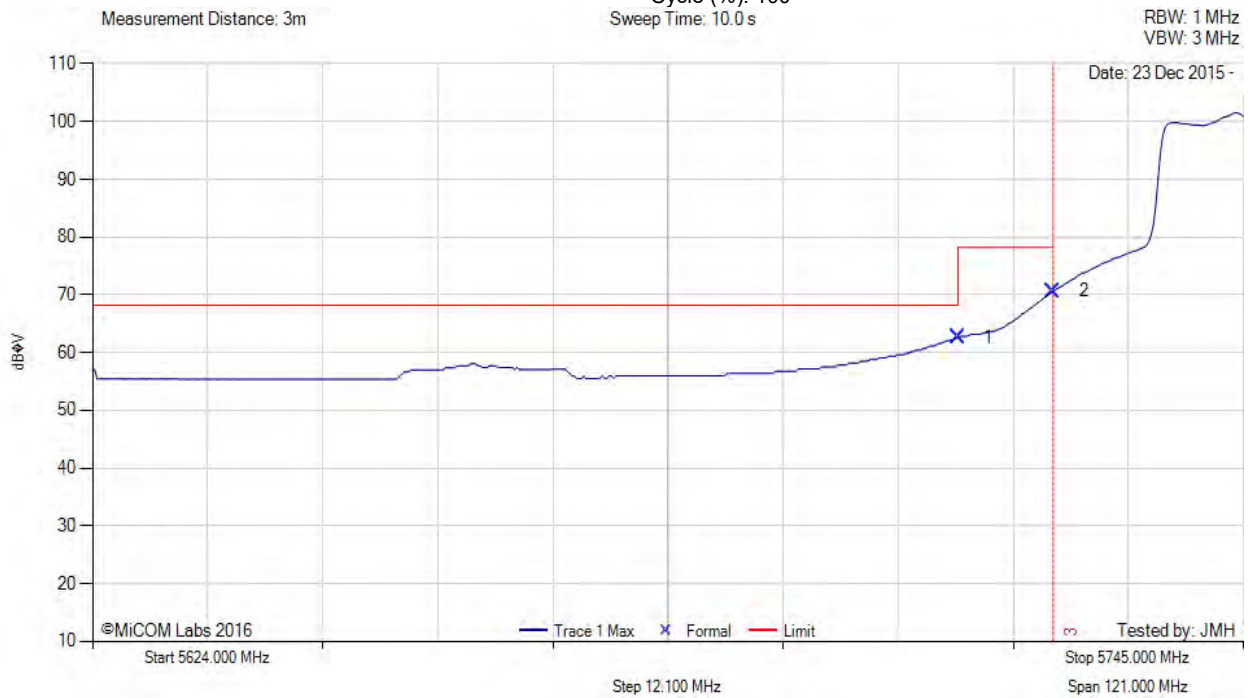

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5715.00	24.48	3.81	34.34	62.63	Marker	Vertical	160	3	68.2	-5.6	Pass
2	5725.00	32.51	3.79	34.35	70.65	Marker	Vertical	160	3	78.2	-7.6	Pass
3	5725.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 340 of 405

5725 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11n HT-40, Test Freq: 5755.00 MHz, Antenna: Aruba Networks AP-ANT-1B, Power Setting: 22, Duty Cycle (%): 100

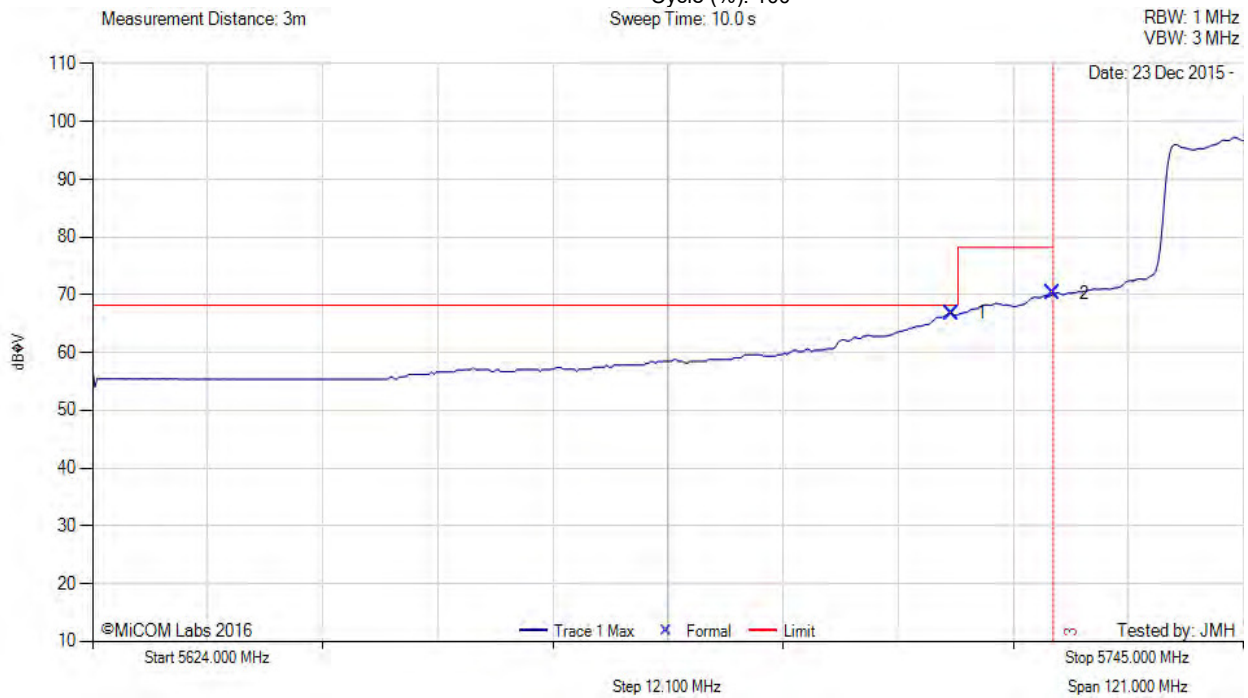

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5714.27	28.67	3.82	34.34	66.83	Marker	Vertical	160	3	68.2	-1.4	Pass
2	5725.00	32.11	3.79	34.35	70.25	Marker	Vertical	160	3	78.2	-8.0	Pass
3	5725.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 341 of 405

5850 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11a, Test Freq: 5825.00 MHz, Antenna: Aruba Networks AP-ANT-1B, Power Setting: 23, Duty Cycle (%): 100

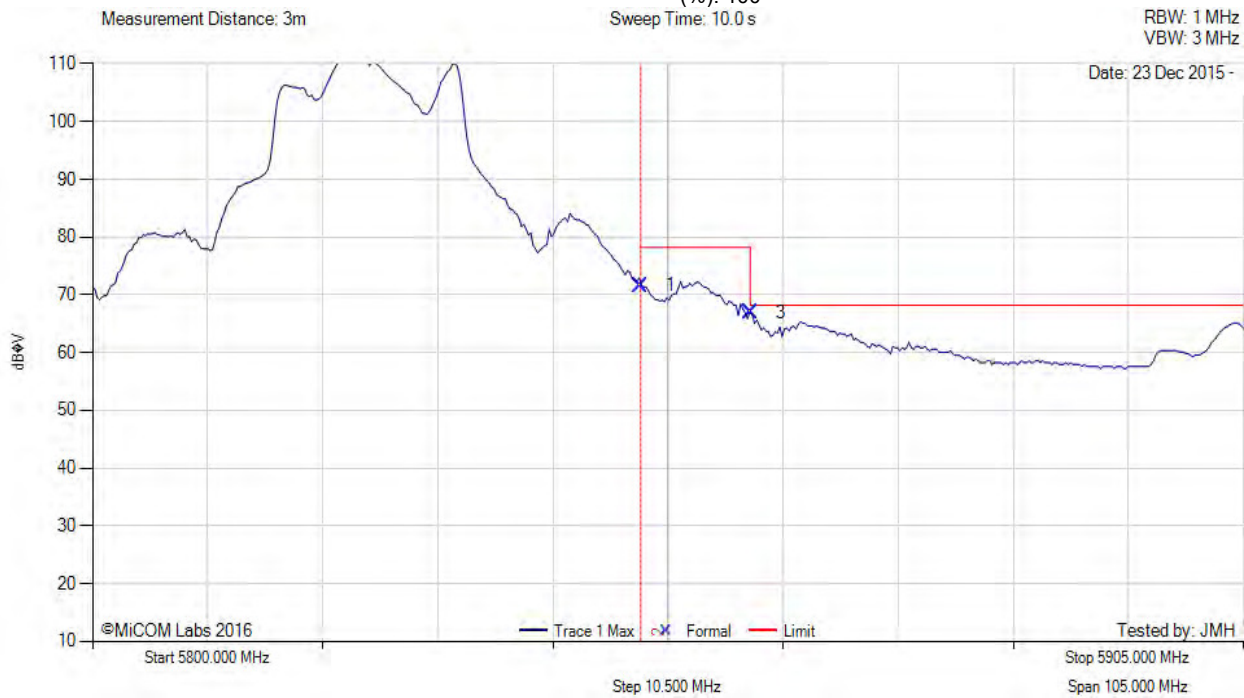

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5850.00	33.20	3.81	34.63	71.64	Marker	Vertical	182	2	78.2	-6.6	Pass
2	5850.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	
3	5860.00	28.45	3.86	34.65	66.96	Marker	Vertical	182	2	68.2	-1.3	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 342 of 405

5850 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11ac-80, Test Freq: 5775.00 MHz, Antenna: Aruba Networks AP-ANT-1B, Power Setting: 22, Duty Cycle (%): 100

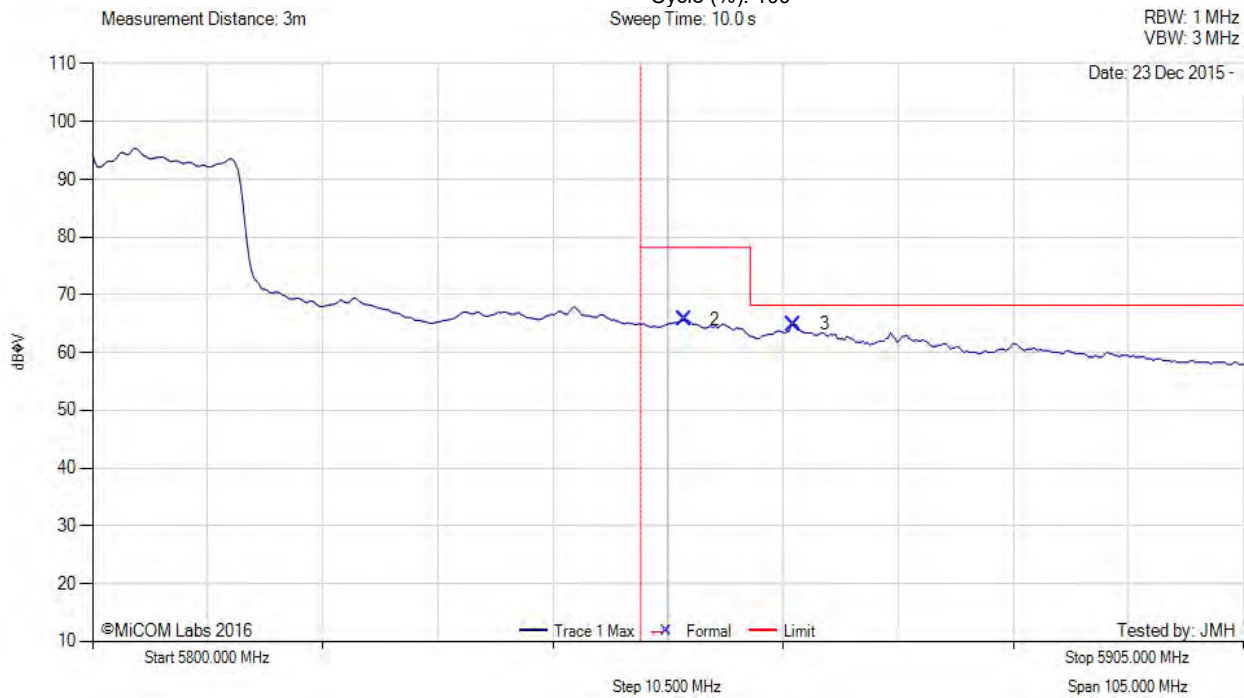

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5850.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	
2	5854.00	27.30	3.83	34.64	65.77	Marker	Vertical	182	2	78.2	-12.5	Pass
3	5864.00	26.41	3.84	34.66	64.91	Marker	Vertical	182	2	68.2	-3.3	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 343 of 405

5850 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11n HT-20, Test Freq: 5825.00 MHz, Antenna: Aruba Networks AP-ANT-1B, Power Setting: 23, Duty Cycle (%): 100

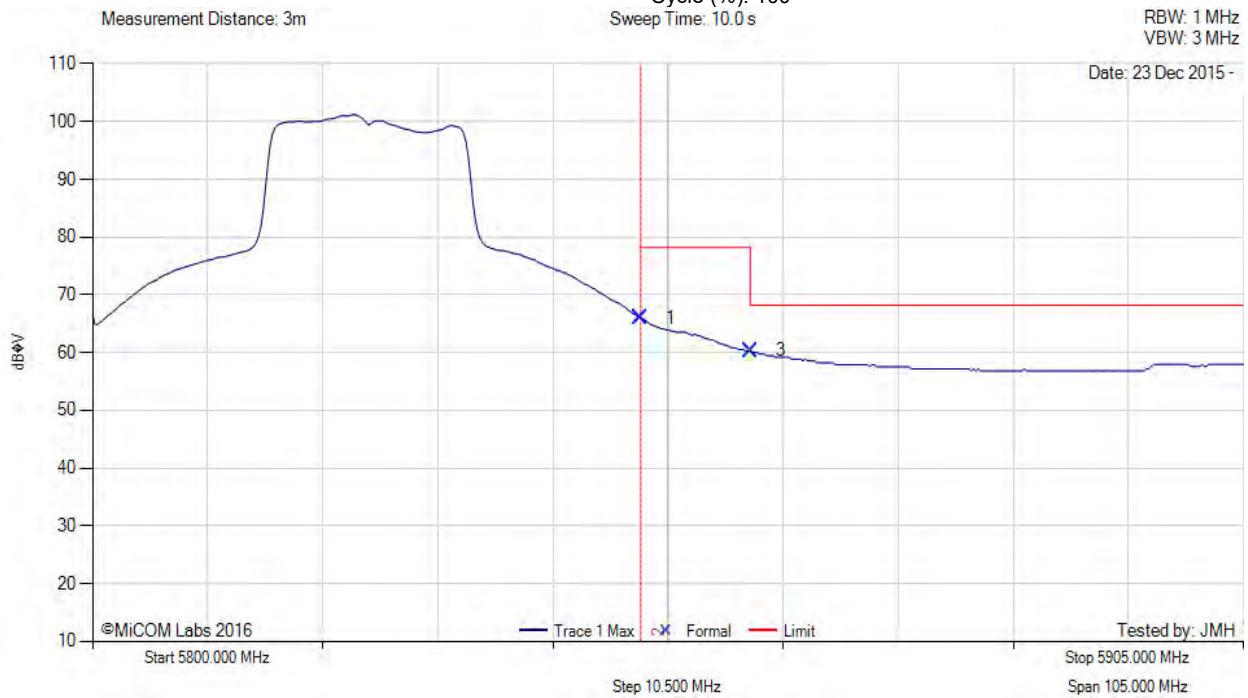

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5850.00	27.60	3.81	34.63	66.04	Marker	Vertical	182	2	78.2	-12.2	Pass
2	5850.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	
3	5860.00	21.80	3.86	34.65	60.31	Marker	Vertical	182	2	68.2	-7.9	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 344 of 405

5850 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11n HT-40, Test Freq: 5795.00 MHz, Antenna: Aruba Networks AP-ANT-1B, Power Setting: 23, Duty Cycle (%): 100

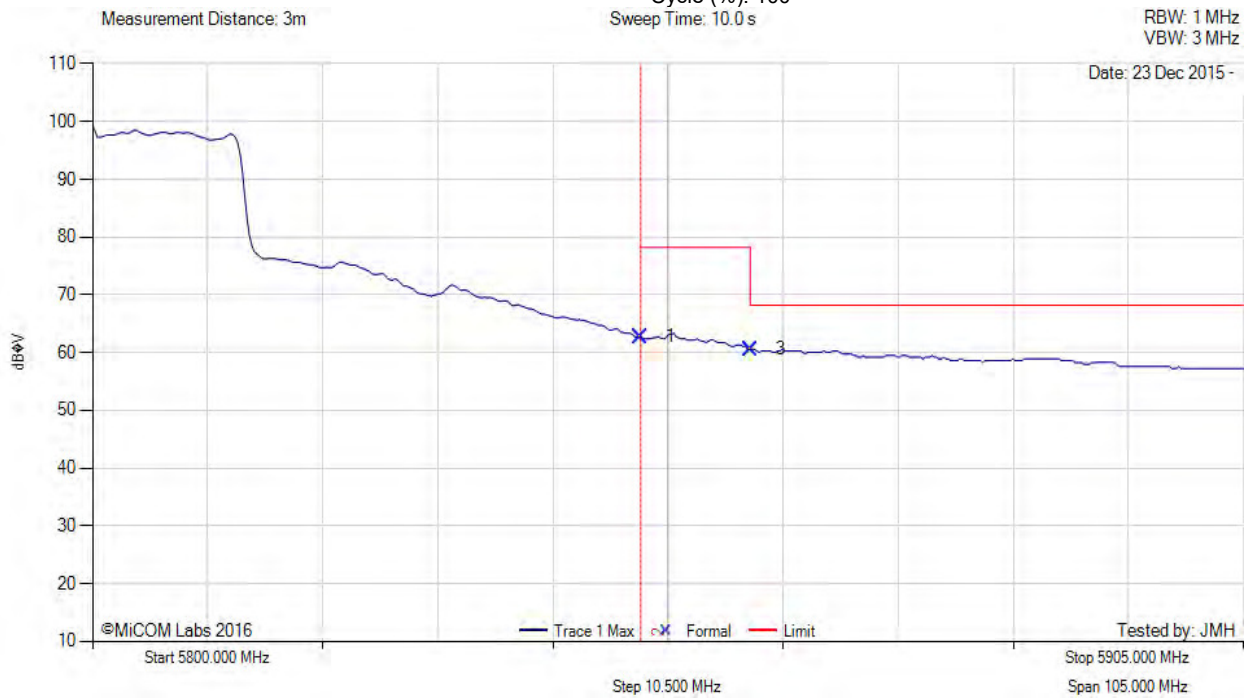

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5850.00	24.34	3.81	34.63	62.78	Marker	Vertical	182	2	78.2	-15.5	Pass
2	5850.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	
3	5860.00	22.06	3.86	34.65	60.57	Marker	Vertical	182	2	68.2	-7.7	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



A.4.2 Antenna AP-ANT-13B



RESTRICTED LOWER BAND-EDGE EMISSIONS

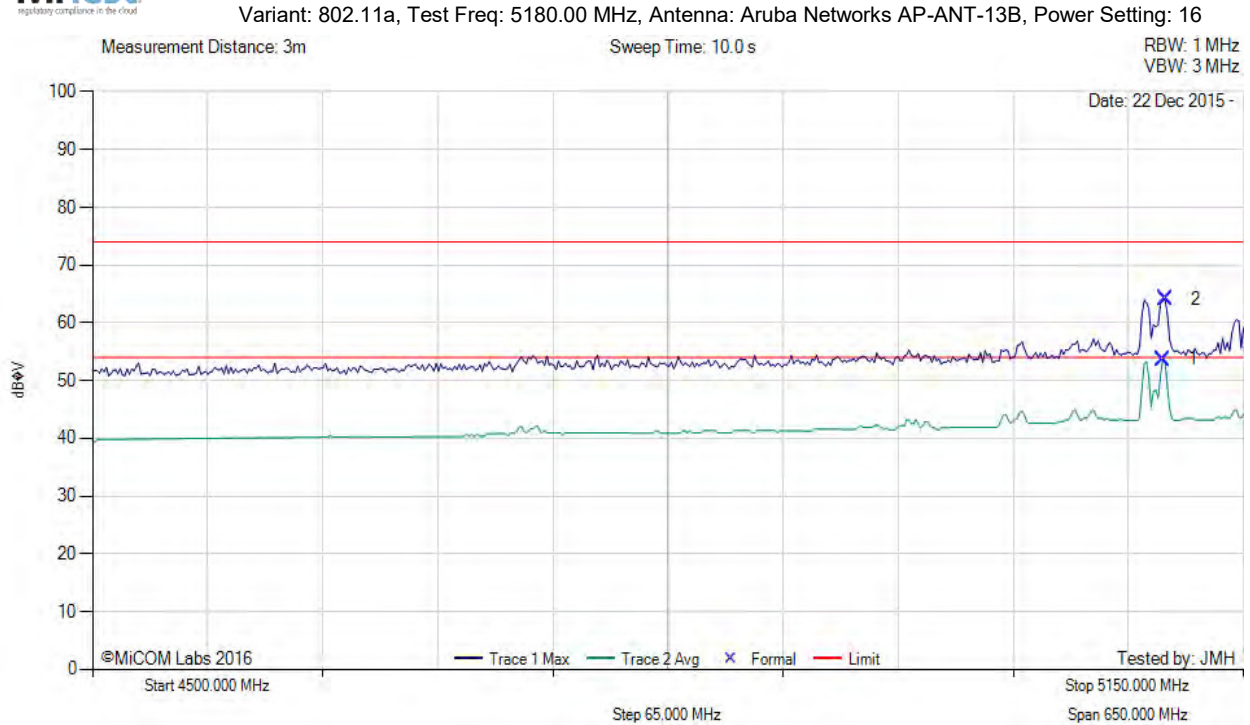

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5104.41	16.02	3.58	34.13	53.73	Max Avg	Vertical	195	-3	54.0	-0.3	Pass
2	5105.71	26.36	3.57	34.13	64.06	Max Peak	Vertical	195	-3	74.0	-9.9	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 346 of 405

RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11ac-80, Test Freq: 5210.00 MHz, Antenna: Aruba Networks AP-ANT-13B, Power Setting: 17.25


Measurement Distance: 3m

Sweep Time: 10.0 s

RBW: 1 MHz

VBW: 3 MHz

Date: 22 Dec 2015

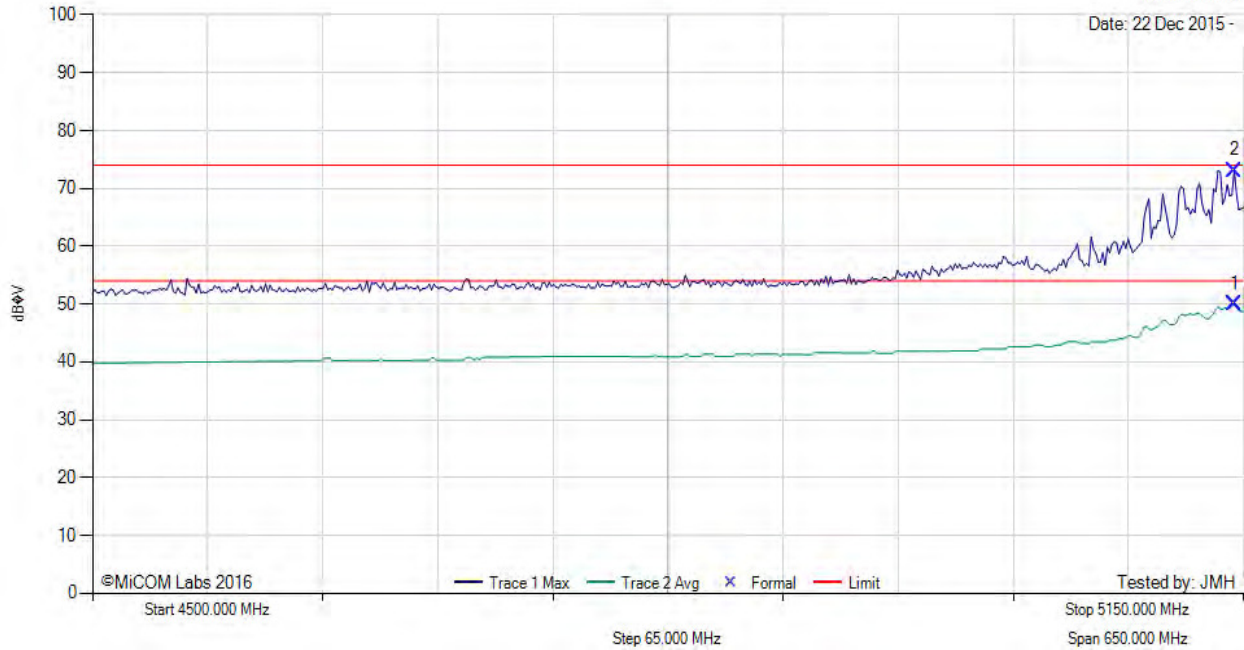

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5144.79	12.16	3.69	34.11	49.96	Max Avg	Vertical	195	-3	54.0	-4.0	Pass
2	5144.79	35.31	3.69	34.11	73.11	Max Peak	Vertical	195	-3	74.0	-0.9	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 347 of 405

RESTRICTED LOWER BAND-EDGE EMISSIONS




Variant: 802.11n HT-20, Test Freq: 5180.00 MHz, Antenna: Aruba Networks AP-ANT-13B, Power Setting: 21

Measurement Distance: 3m

Sweep Time: 10.0 s

RBW: 1 MHz
VBW: 3 MHz

Date: 22 Dec 2015 -

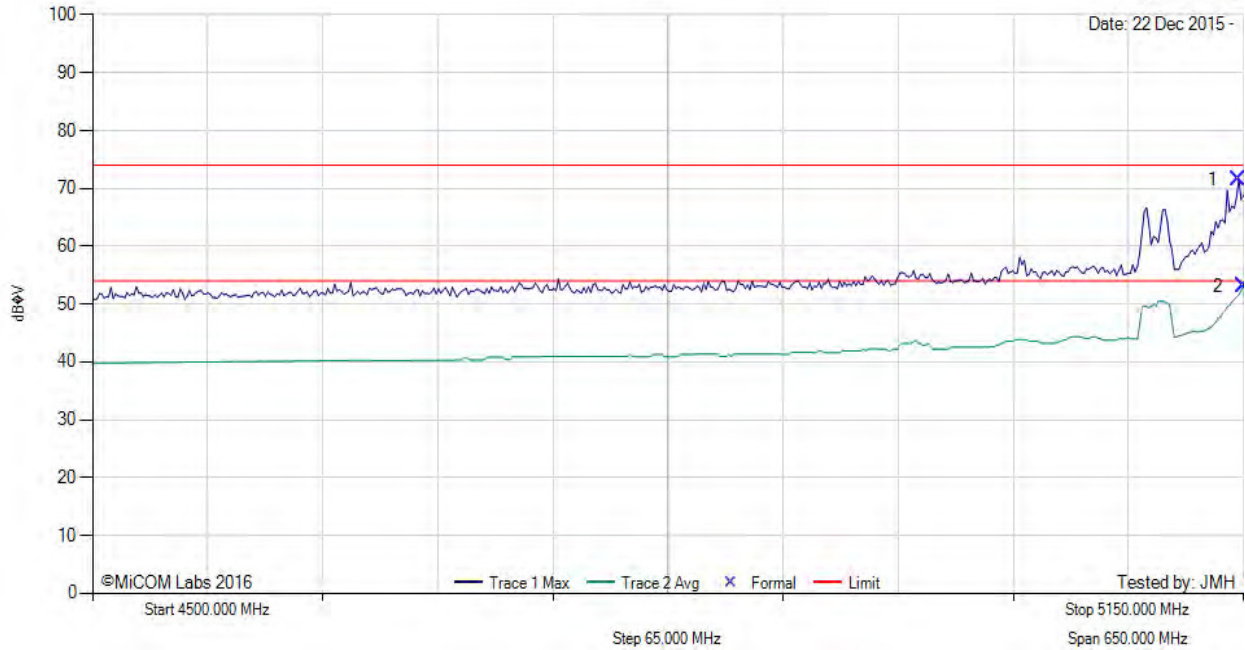

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5147.39	33.81	3.68	34.11	71.60	Max Peak	Vertical	195	-3	74.0	-2.4	Pass
2	5150.00	15.27	3.67	34.11	53.05	Max Avg	Vertical	195	-3	54.0	-1.0	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 348 of 405

RESTRICTED LOWER BAND-EDGE EMISSIONS




Variant: 802.11n HT-40, Test Freq: 5190.00 MHz, Antenna: Aruba Networks AP-ANT-13B, Power Setting: 18

Measurement Distance: 3m

Sweep Time: 10.0 s

RBW: 1 MHz
VBW: 3 MHz

Date: 22 Dec 2015

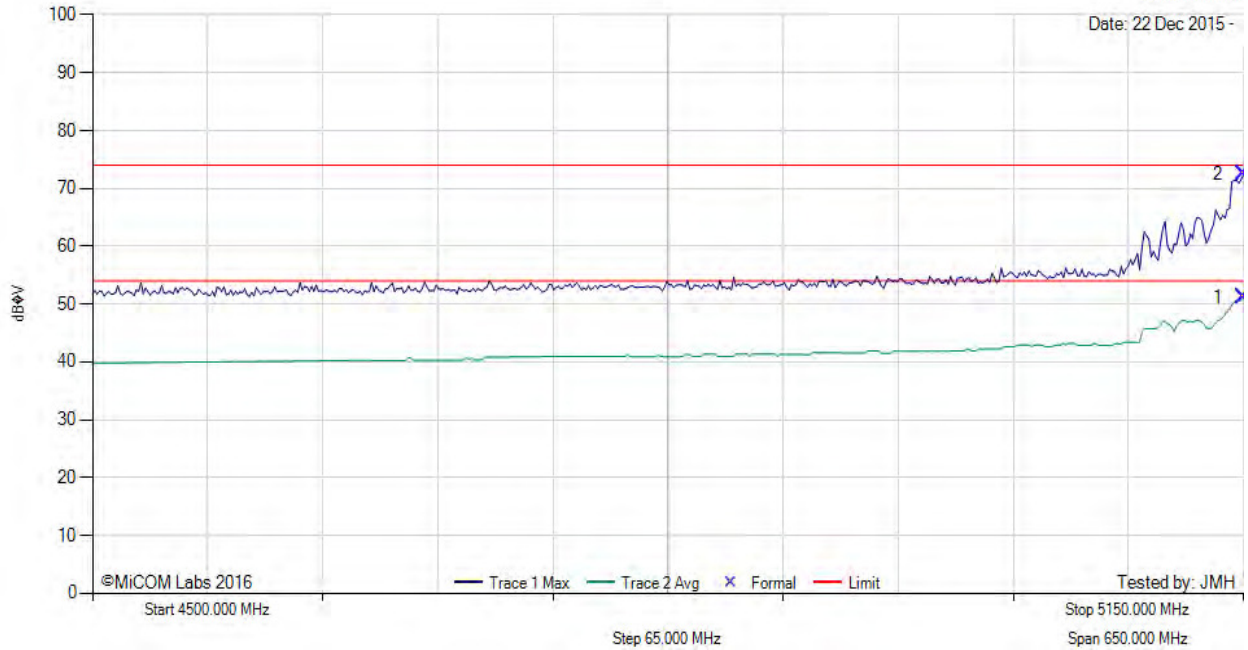

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5150.00	13.39	3.67	34.11	51.17	Max Avg	Vertical	195	-3	54.0	-2.8	Pass
2	5150.00	34.68	3.67	34.11	72.46	Max Peak	Vertical	195	-3	74.0	-1.5	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 349 of 405

5725 MHz RADIATED BAND-EDGE EMISSIONS




Variant: 802.11a, Test Freq: 5745.00 MHz, Antenna: Aruba Networks AP-ANT-13B, Power Setting: 21

Measurement Distance: 3m

Sweep Time: 10.0 s

RBW: 1 MHz
VBW: 3 MHz

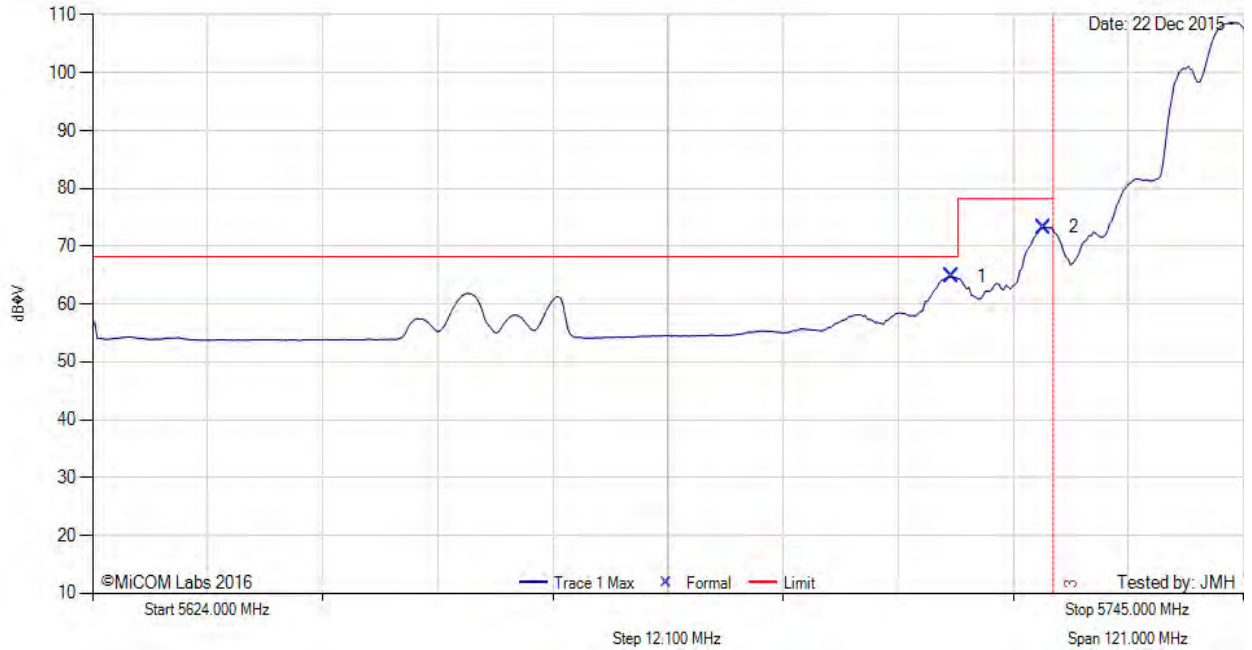

Num	Frequency MHz	Raw dBμV	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	5714.27	26.54	3.82	34.34	64.70	Marker	Vertical	186	360	68.2	-3.5	Pass
2	5724.03	35.15	3.79	34.35	73.29	Marker	Vertical	186	360	78.2	-4.9	Pass
3	5725.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



5725 MHz RADIATED BAND-EDGE EMISSIONS




Variant: 802.11ac-80, Test Freq: 5775.00 MHz, Antenna: Aruba Networks AP-ANT-13B, Power Setting: 22

Measurement Distance: 3m

Sweep Time: 10.0 s

RBW: 1 MHz
VBW: 3 MHz

Date: 22 Dec 2015 -

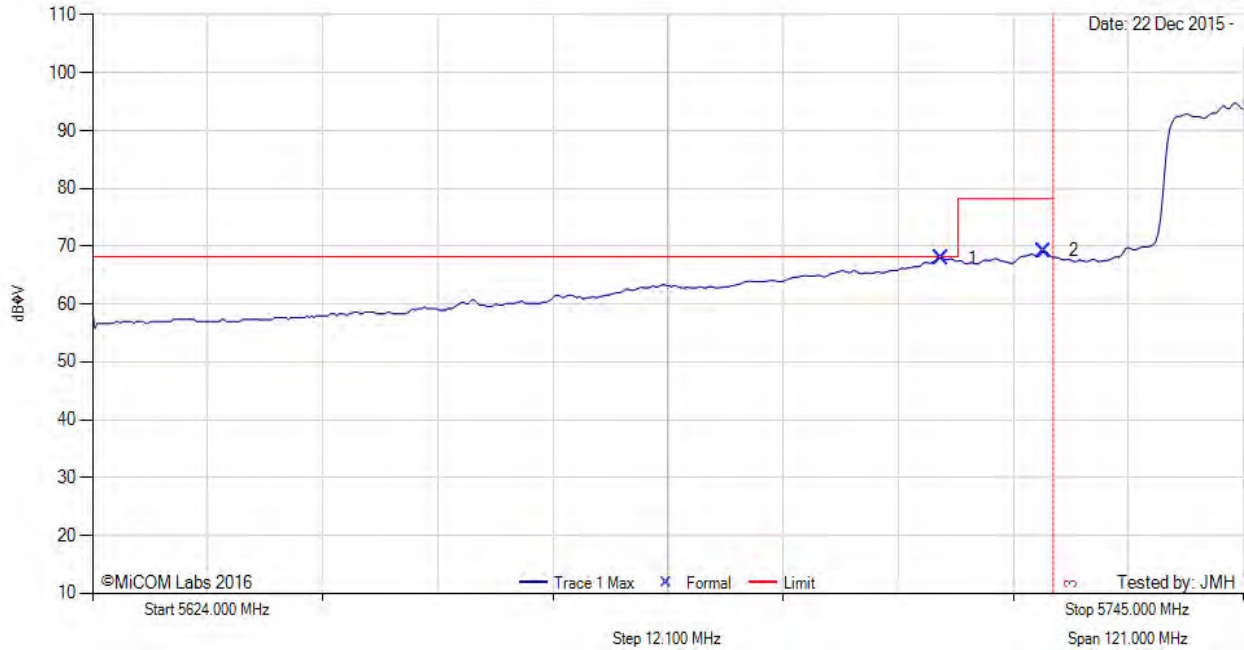

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5713.30	29.79	3.82	34.34	67.95	Marker	Vertical	186	360	68.2	-0.3	Pass
2	5724.03	31.09	3.79	34.35	69.23	Marker	Vertical	186	360	78.2	-9.0	Pass
3	5725.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 351 of 405

5725 MHz RADIATED BAND-EDGE EMISSIONS




Variant: 802.11n HT-20, Test Freq: 5745.00 MHz, Antenna: Aruba Networks AP-ANT-13B, Power Setting: 23

Measurement Distance: 3m

Sweep Time: 10.0 s

RBW: 1 MHz
VBW: 3 MHz

Date: 22 Dec 2015 -

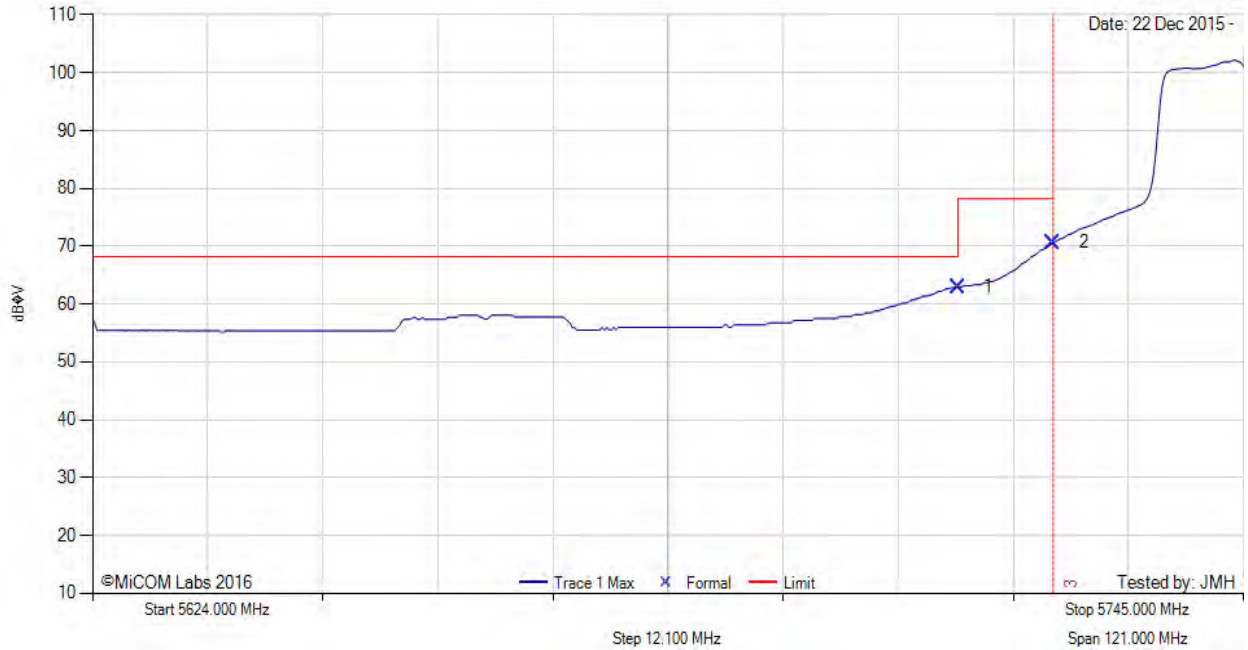

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5715.00	24.86	3.81	34.34	63.01	Marker	Vertical	186	360	68.2	-5.2	Pass
2	5725.00	32.51	3.79	34.35	70.65	Marker	Vertical	186	360	78.2	-7.6	Pass
3	5725.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 352 of 405

5725 MHz RADIATED BAND-EDGE EMISSIONS




Variant: 802.11n HT-40, Test Freq: 5755.00 MHz, Antenna: Aruba Networks AP-ANT-13B, Power Setting: 22

Measurement Distance: 3m

Sweep Time: 10.0 s

RBW: 1 MHz
VBW: 3 MHz

Date: 22 Dec 2015 -

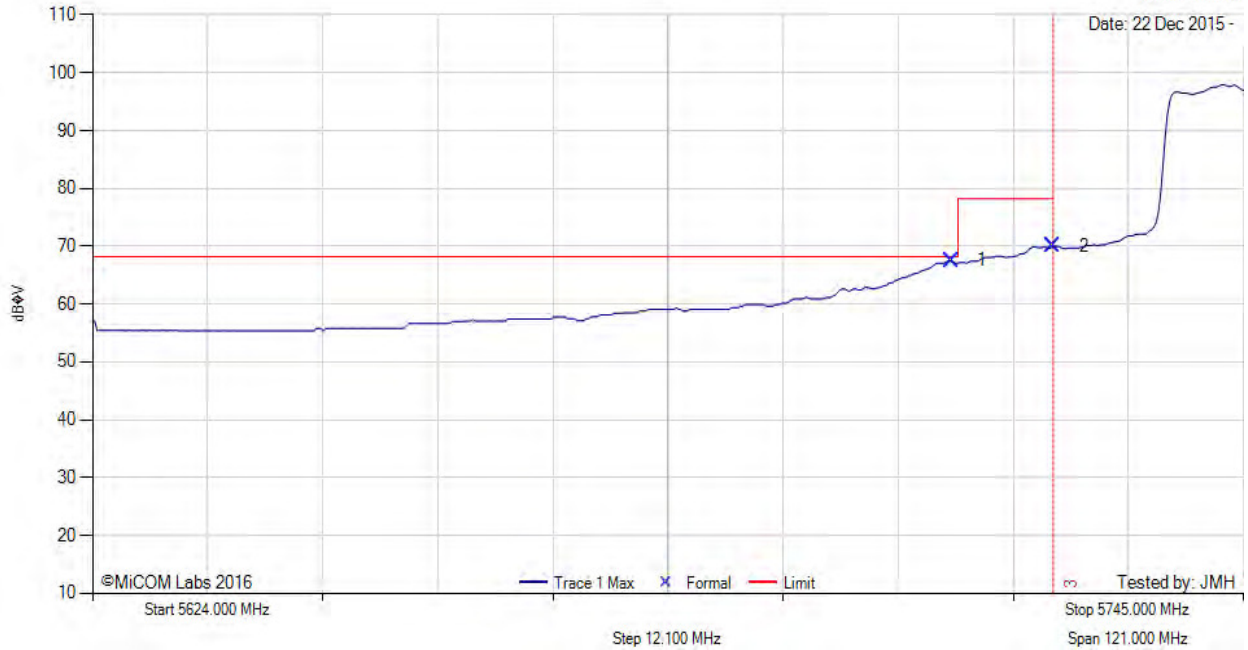

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5714.27	29.36	3.82	34.34	67.52	Marker	Vertical	186	360	68.2	-0.7	Pass
2	5725.00	31.87	3.79	34.35	70.01	Marker	Vertical	186	360	78.2	-8.2	Pass
3	5725.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 353 of 405

5850 MHz RADIATED BAND-EDGE EMISSIONS




Variant: 802.11a, Test Freq: 5825.00 MHz, Antenna: Aruba Networks AP-ANT-13B, Power Setting: 23

Measurement Distance: 3m

Sweep Time: 10.0 s

RBW: 1 MHz
VBW: 3 MHz

Date: 22 Dec 2015 -

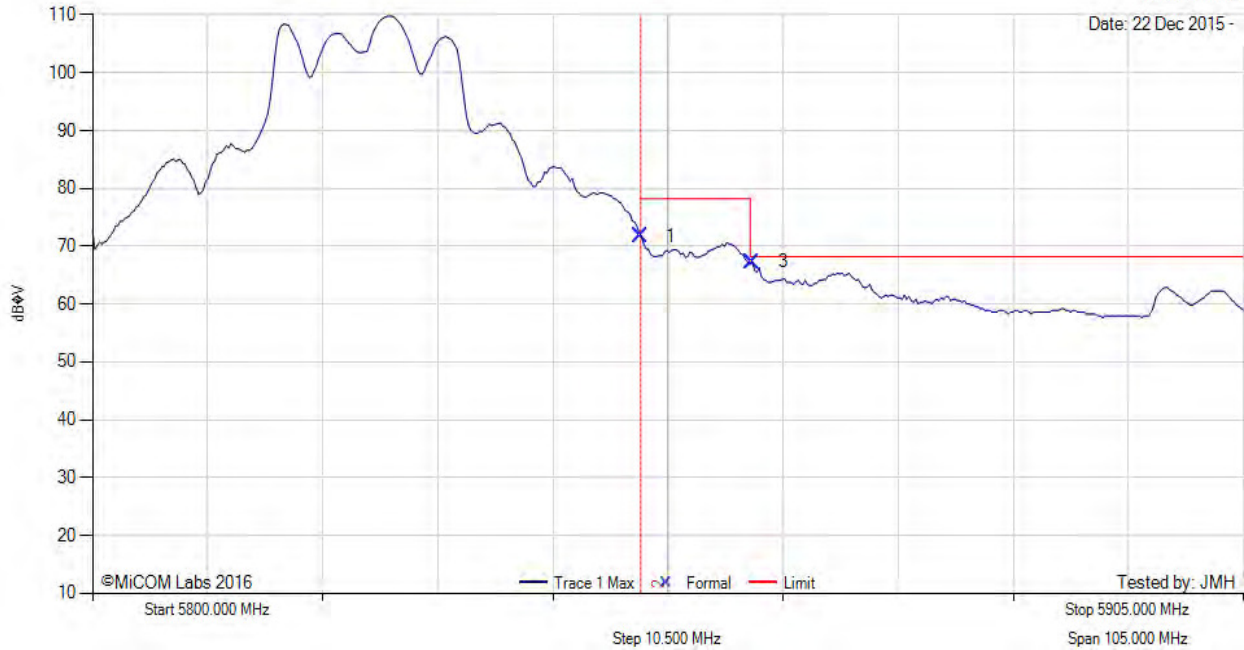

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5850.00	33.27	3.81	34.63	71.71	Marker	Vertical	189	3	78.2	-6.5	Pass
2	5850.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	
3	5860.21	28.81	3.86	34.65	67.32	Marker	Vertical	189	3	68.2	-0.9	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 354 of 405

5850 MHz RADIATED BAND-EDGE EMISSIONS




Variant: 802.11ac-80, Test Freq: 5775.00 MHz, Antenna: Aruba Networks AP-ANT-13B, Power Setting: 23

Measurement Distance: 3m

Sweep Time: 10.0 s

RBW: 1 MHz
VBW: 3 MHz

Date: 22 Dec 2015

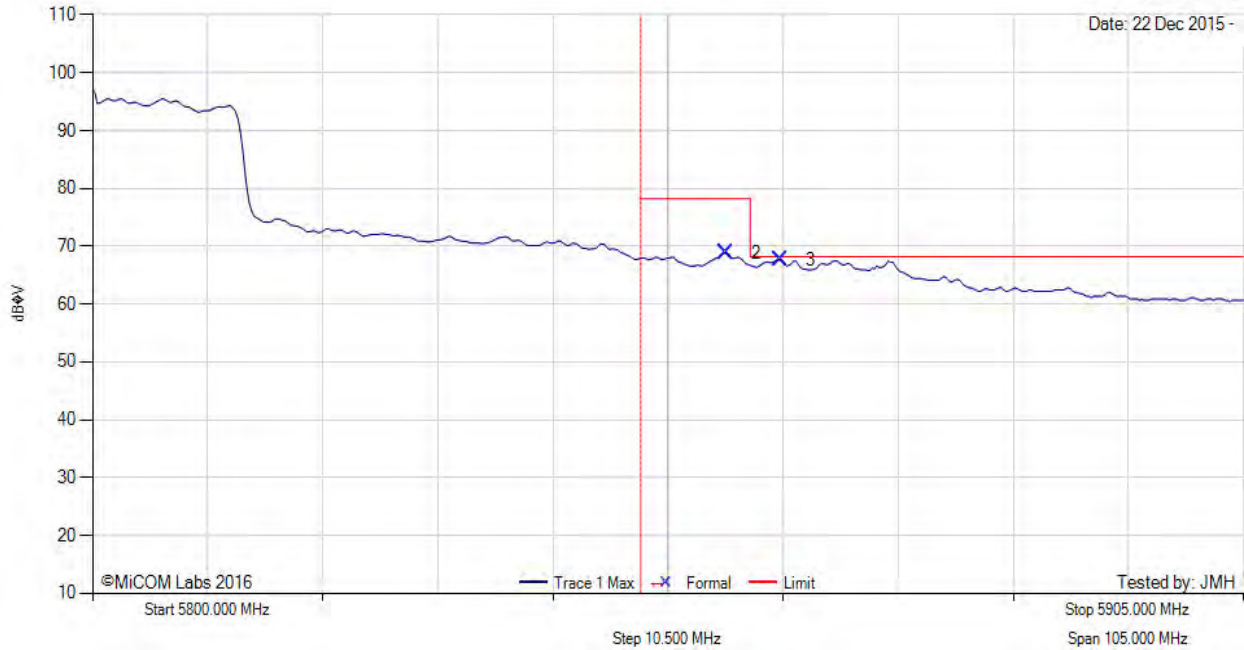

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5850.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	
2	5857.79	30.32	3.85	34.65	68.82	Marker	Vertical	189	3	78.2	-9.4	Pass
3	5862.74	29.16	3.85	34.66	67.67	Marker	Vertical	189	3	68.2	-0.6	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 355 of 405

5850 MHz RADIATED BAND-EDGE EMISSIONS




Variant: 802.11n HT-20, Test Freq: 5825.00 MHz, Antenna: Aruba Networks AP-ANT-13B, Power Setting: 23

Measurement Distance: 3m

Sweep Time: 10.0 s

RBW: 1 MHz
VBW: 3 MHz

Date: 22 Dec 2015

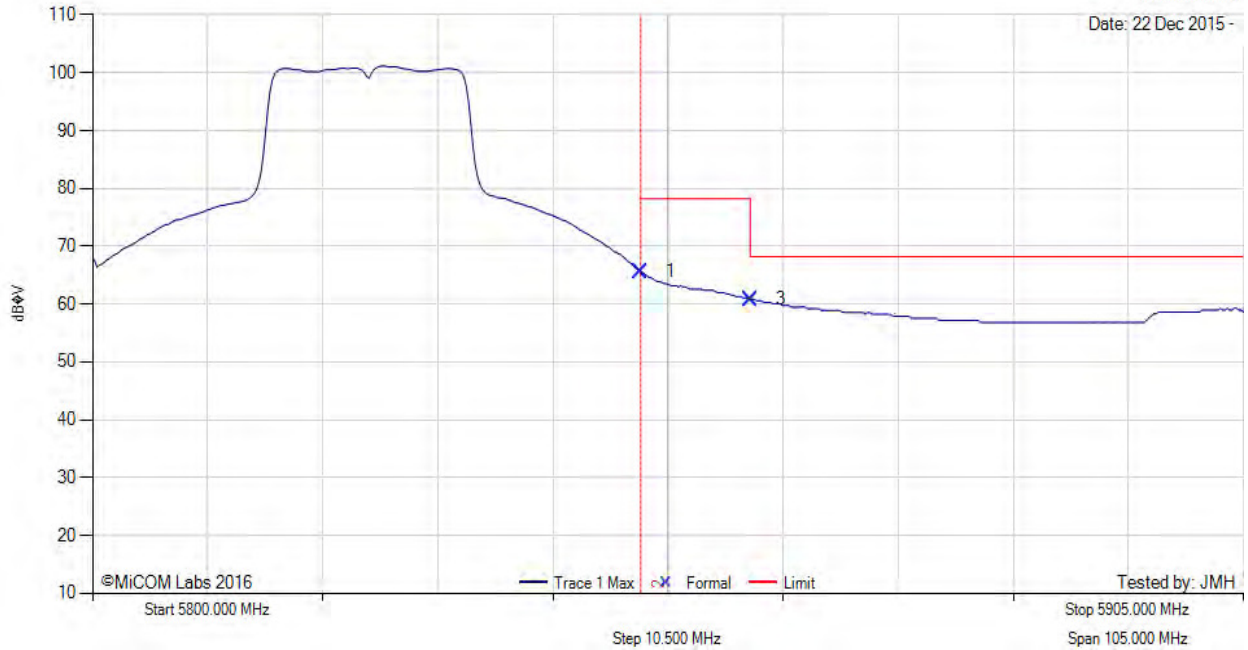

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5850.00	27.18	3.81	34.63	65.62	Marker	Vertical	189	3	78.2	-12.6	Pass
2	5850.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	
3	5860.00	22.31	3.86	34.65	60.82	Marker	Vertical	189	3	68.2	-7.4	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



5850 MHz RADIATED BAND-EDGE EMISSIONS




Variant: 802.11n HT-40, Test Freq: 5795.00 MHz, Antenna: Aruba Networks AP-ANT-13B, Power Setting: 23

Measurement Distance: 3m

Sweep Time: 10.0 s

RBW: 1 MHz
VBW: 3 MHz

Date: 22 Dec 2015

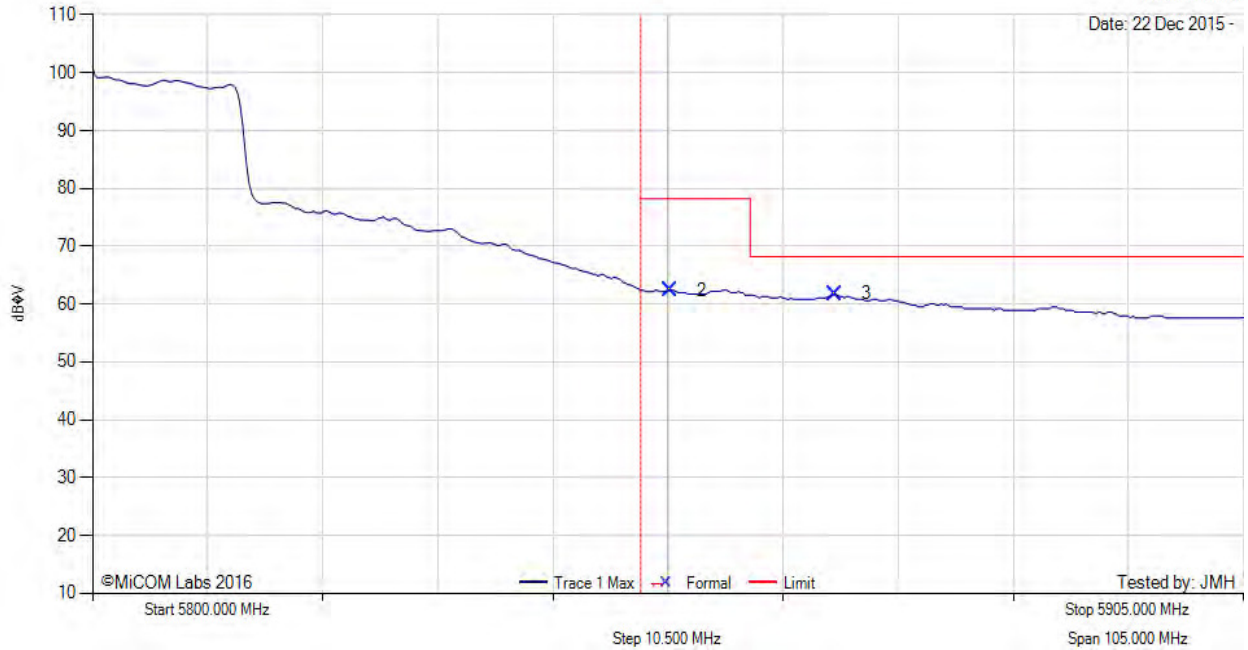

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5850.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	
2	5852.74	23.94	3.82	34.63	62.39	Marker	Vertical	189	3	78.2	-15.8	Pass
3	5867.79	23.28	3.82	34.68	61.78	Marker	Vertical	189	3	68.2	-6.5	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 357 of 405

A.4.3 Antenna AP-ANT-16

RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11a, Test Freq: 5180.00 MHz, Antenna: Aruba Networks AP-ANT-16, Power Setting: 14, Duty Cycle (%): 100

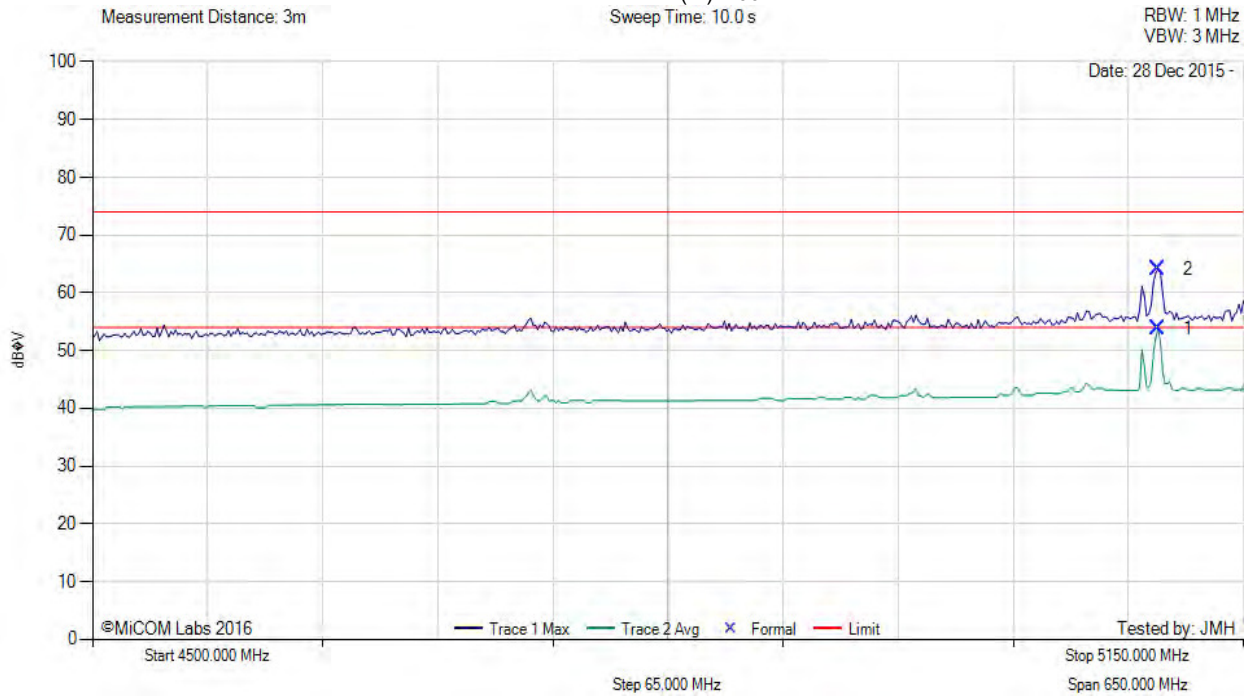

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5101.80	16.10	3.58	34.13	53.81	Max Avg	Horizontal	101	320	54.0	-0.2	Pass
2	5101.80	26.34	3.58	34.13	64.05	Max Peak	Horizontal	101	320	74.0	-10.0	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 358 of 405

RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11ac-80, Test Freq: 5210.00 MHz, Antenna: Aruba Networks AP-ANT-16, Power Setting: 17.25, Duty Cycle (%): 100

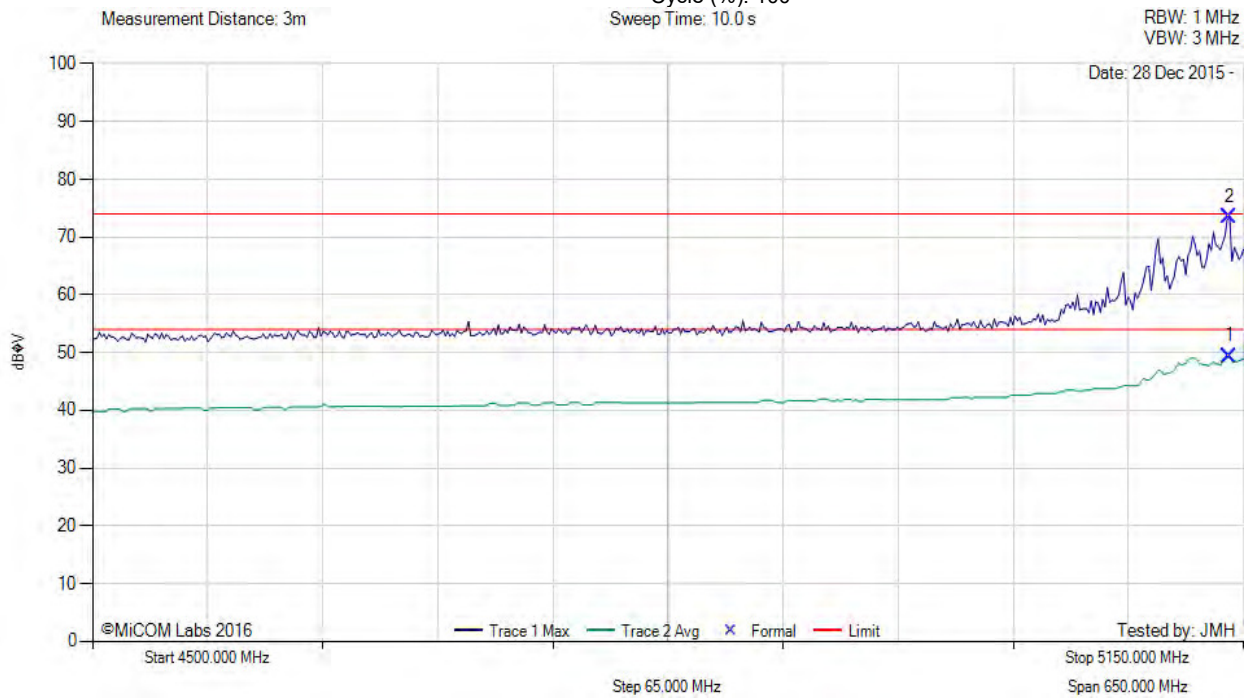

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5142.18	11.55	3.70	34.12	49.37	Max Avg	Horizontal	101	320	54.0	-4.6	Pass
2	5142.18	35.67	3.70	34.12	73.49	Max Peak	Horizontal	101	320	74.0	-0.5	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 359 of 405

RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11n HT-20, Test Freq: 5180.00 MHz, Antenna: Aruba Networks AP-ANT-16, Power Setting: 21, Duty Cycle (%): 100

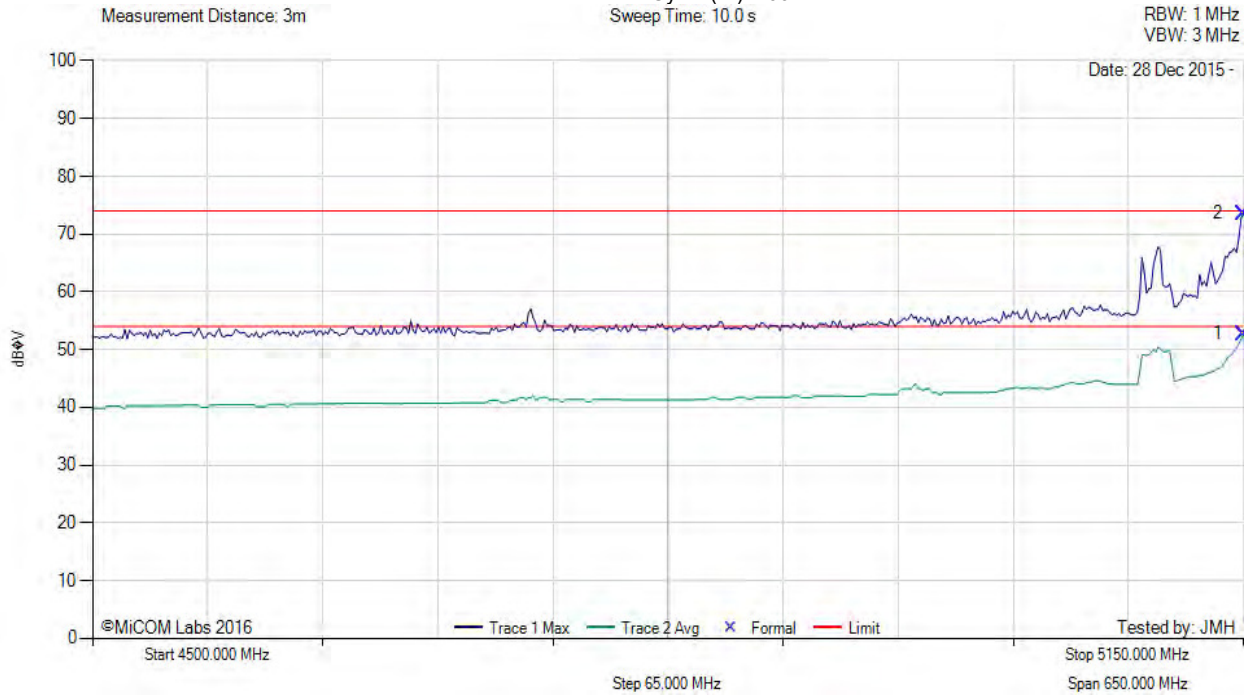

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5150.00	14.97	3.67	34.11	52.75	Max Avg	Horizontal	101	320	54.0	-1.3	Pass
2	5150.00	35.83	3.67	34.11	73.61	Max Peak	Horizontal	101	320	74.0	-0.4	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 360 of 405

RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11n HT-40, Test Freq: 5190.00 MHz, Antenna: Aruba Networks AP-ANT-16, Power Setting: 18, Duty Cycle (%): 100

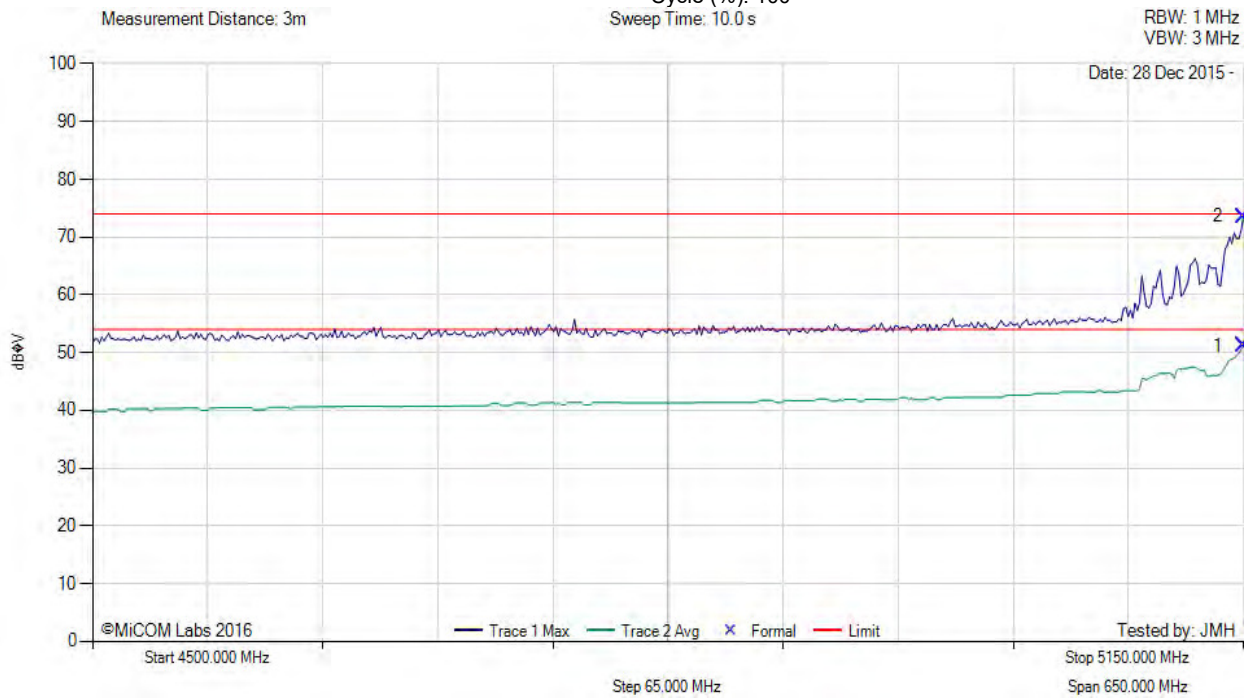

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5150.00	13.39	3.67	34.11	51.17	Max Avg	Horizontal	101	320	54.0	-2.8	Pass
2	5150.00	35.78	3.67	34.11	73.56	Max Peak	Horizontal	101	320	74.0	-0.4	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 361 of 405

5725 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11a, Test Freq: 5745.00 MHz, Antenna: Aruba Networks AP-ANT-16, Power Setting: 22, Duty Cycle (%): 100

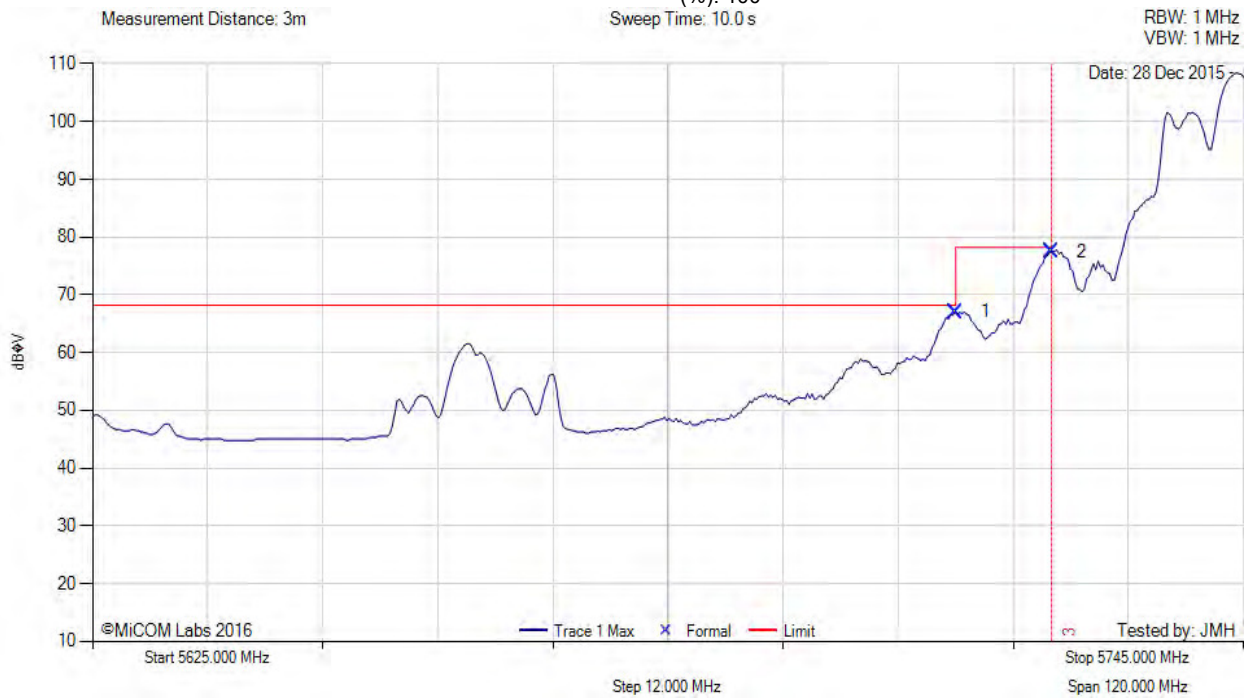

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5715.00	28.93	3.81	34.34	67.08	Marker	Horizontal	131	295	68.2	-1.2	Pass
2	5725.00	39.35	3.79	34.35	77.49	Marker	Horizontal	131	295	78.2	-0.7	Pass
3	5725.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	

Test Notes: EUT on 150cm table, powered by PDSine 9001GR

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 362 of 405

5725 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11ac-80, Test Freq: 5775.00 MHz, Antenna: Aruba Networks AP-ANT-16, Power Setting: 21, Duty Cycle (%): 100

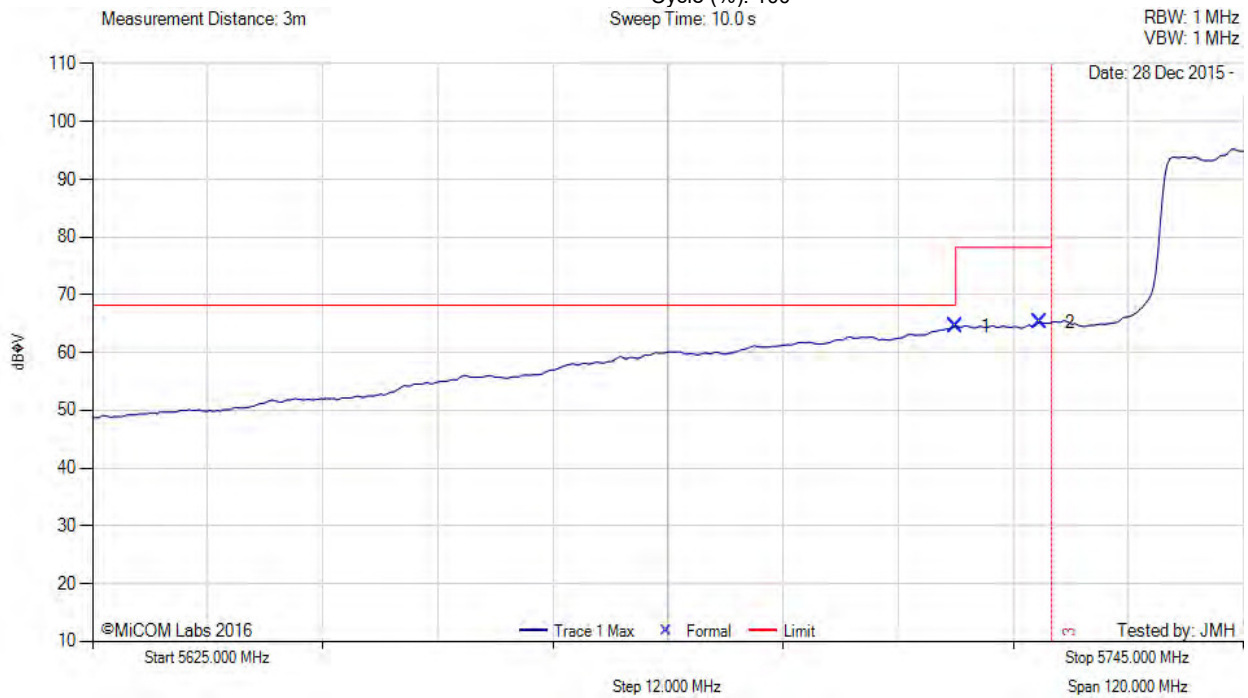

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5715.00	26.41	3.81	34.34	64.56	Marker	Horizontal	131	295	68.2	-3.7	Pass
2	5723.80	27.18	3.79	34.35	65.32	Marker	Horizontal	131	295	78.2	-12.9	Pass
3	5725.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	

Test Notes: EUT on 150cm table, powered by PDSine 9001GR

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 363 of 405

5725 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11n HT-20, Test Freq: 5745.00 MHz, Antenna: Aruba Networks AP-ANT-16, Power Setting: 23, Duty Cycle (%): 100

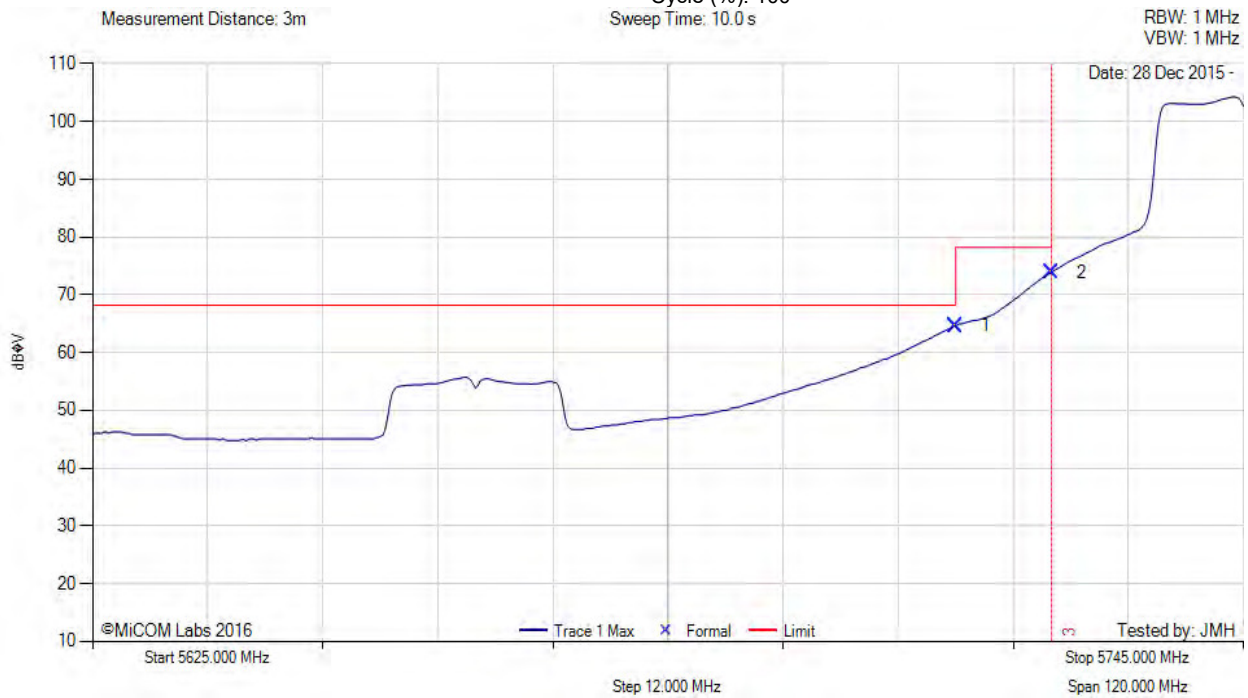

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5715.00	26.52	3.81	34.34	64.67	Marker	Horizontal	131	295	68.2	-3.6	Pass
2	5725.00	35.81	3.79	34.35	73.95	Marker	Horizontal	131	295	78.2	-4.3	Pass
3	5725.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	

Test Notes: EUT on 150cm table, powered by PDSine 9001GR

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 364 of 405

5725 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11n HT-40, Test Freq: 5755.00 MHz, Antenna: Aruba Networks AP-ANT-16, Power Setting: 21, Duty Cycle (%): 100

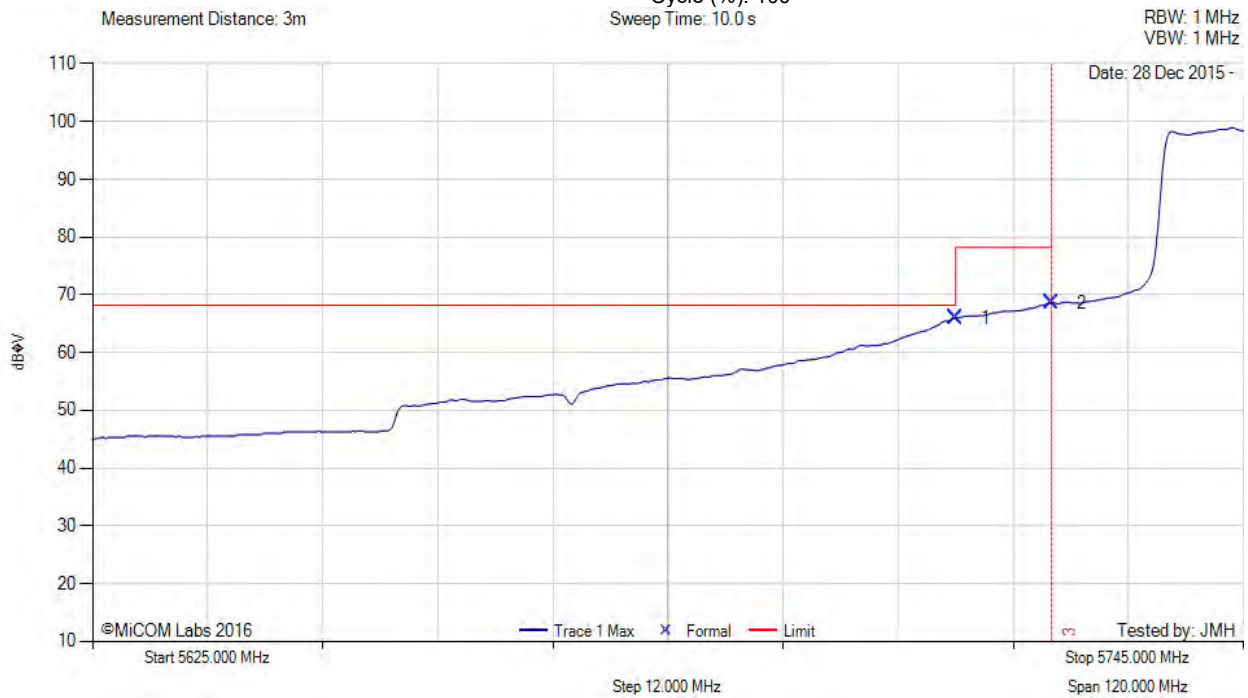

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5715.00	27.86	3.81	34.34	66.01	Marker	Horizontal	131	295	68.2	-2.2	Pass
2	5725.00	30.46	3.79	34.35	68.60	Marker	Horizontal	131	295	78.2	-9.6	Pass
3	5725.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	

Test Notes: EUT on 150cm table, powered by PDSine 9001GR

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 365 of 405

5850 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11a, Test Freq: 5825.00 MHz, Antenna: Aruba Networks AP-ANT-16, Power Setting: 22, Duty Cycle (%): 100

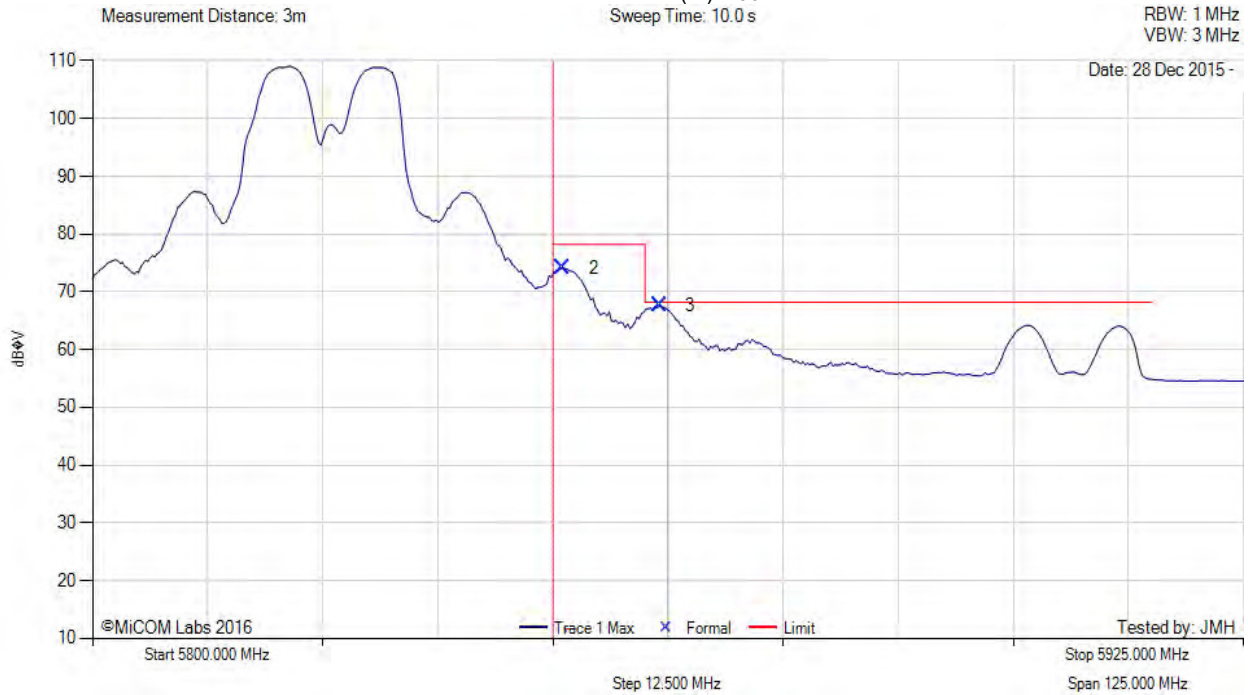

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5850.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	
2	5851.10	35.67	3.81	34.63	74.11	Marker	Horizontal	188	291	78.2	-4.1	Pass
3	5861.62	29.11	3.85	34.66	67.62	Marker	Horizontal	188	291	68.2	-0.6	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 366 of 405

5850 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11ac-80, Test Freq: 5775.00 MHz, Antenna: Aruba Networks AP-ANT-16, Power Setting: 22, Duty Cycle (%): 100

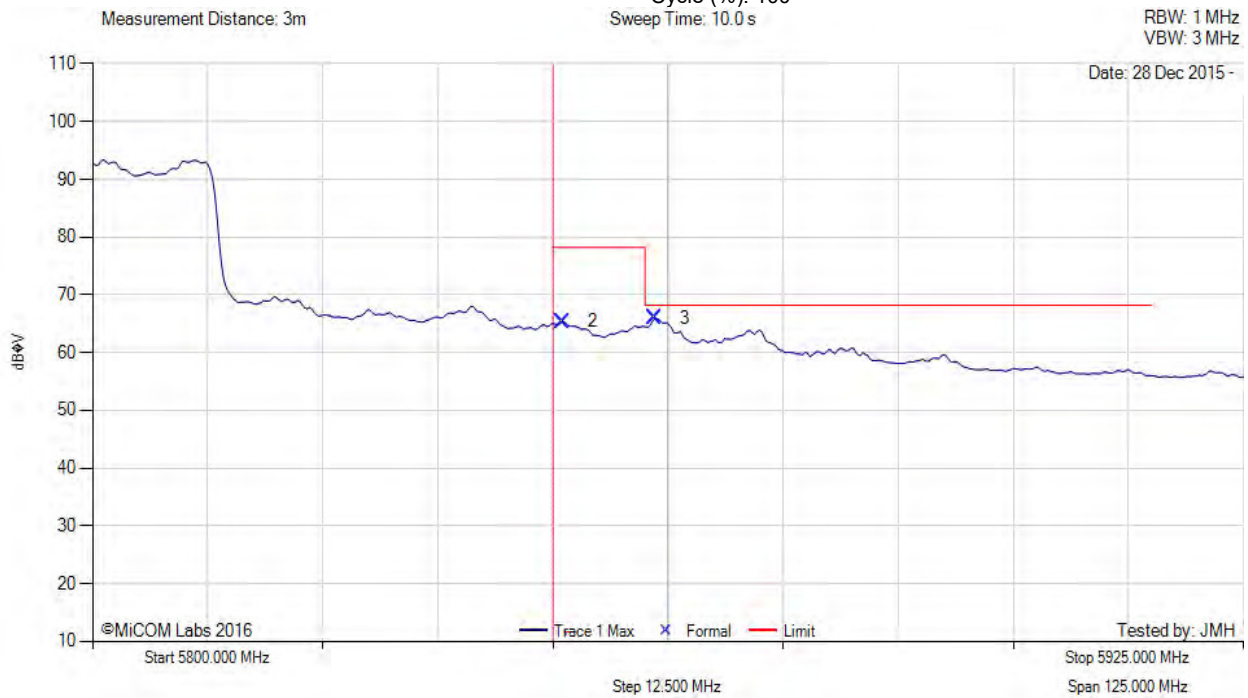

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5850.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	
2	5851.00	26.93	3.81	34.63	65.37	Marker	Horizontal	188	291	78.2	-12.9	Pass
3	5861.00	27.38	3.86	34.66	65.90	Marker	Horizontal	188	291	68.2	-2.3	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 367 of 405

5850 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11n HT-20, Test Freq: 5825.00 MHz, Antenna: Aruba Networks AP-ANT-16, Power Setting: 23, Duty Cycle (%): 100

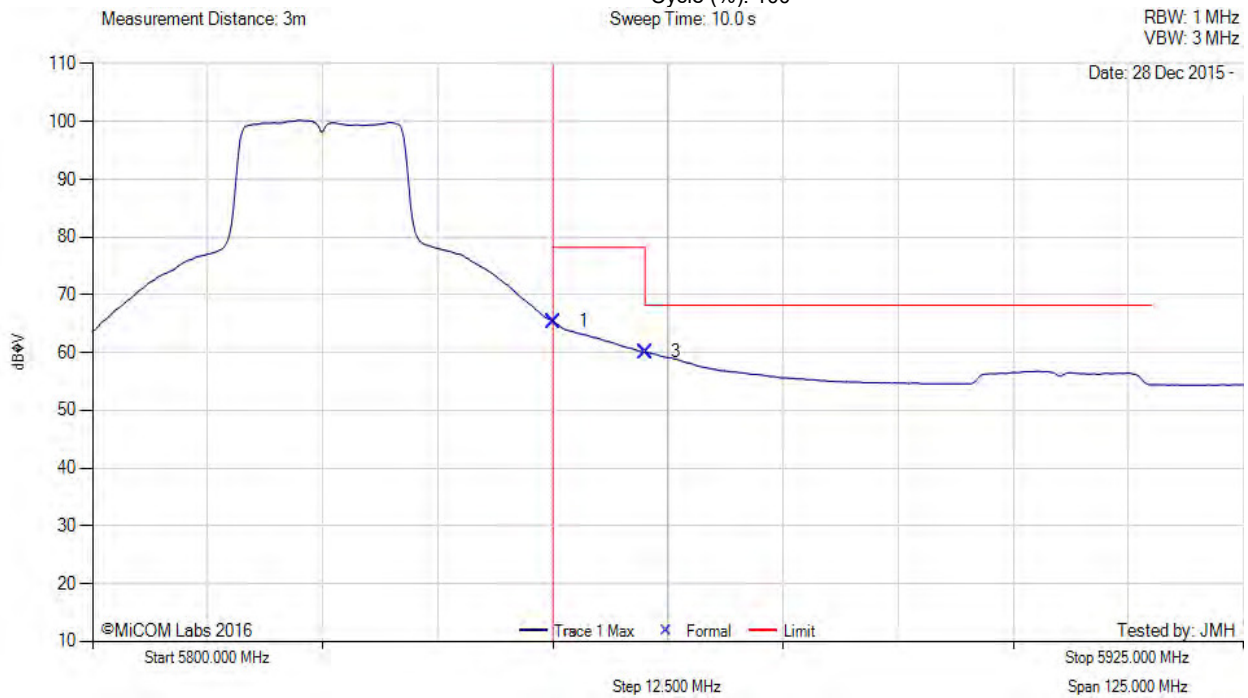

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5850.00	26.93	3.81	34.63	65.37	Marker	Horizontal	188	291	78.2	-12.9	Pass
2	5850.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	
3	5860.00	21.56	3.86	34.65	60.07	Marker	Horizontal	188	291	68.2	-8.2	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 368 of 405

5850 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11n HT-40, Test Freq: 5795.00 MHz, Antenna: Aruba Networks AP-ANT-16, Power Setting: 23, Duty Cycle (%): 100

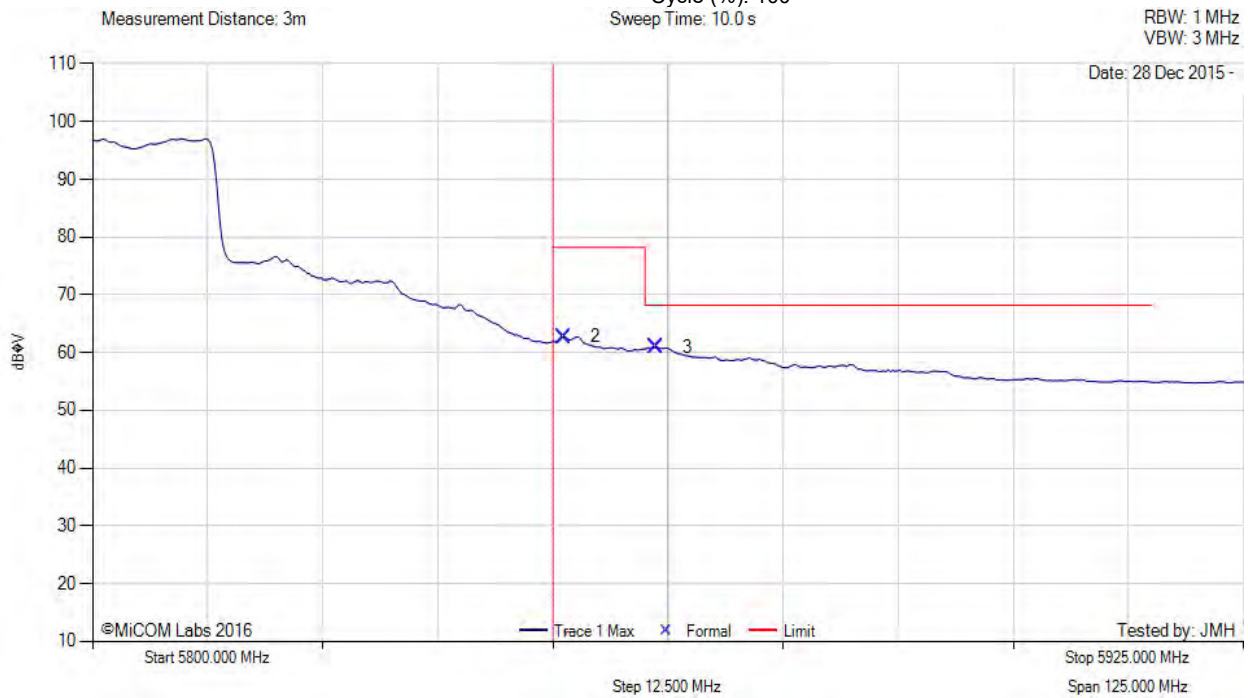

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5850.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	
2	5851.25	24.29	3.81	34.63	62.73	Marker	Horizontal	188	291	78.2	-15.5	Pass
3	5861.25	22.43	3.86	34.66	60.95	Marker	Horizontal	188	291	68.2	-7.3	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 369 of 405

A.4.4 Antenna AP-ANT-18

RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11a, Test Freq: 5180.00 MHz, Antenna: Aruba Networks AP-ANT-18, Power Setting: 16.5, Duty Cycle (%): 100

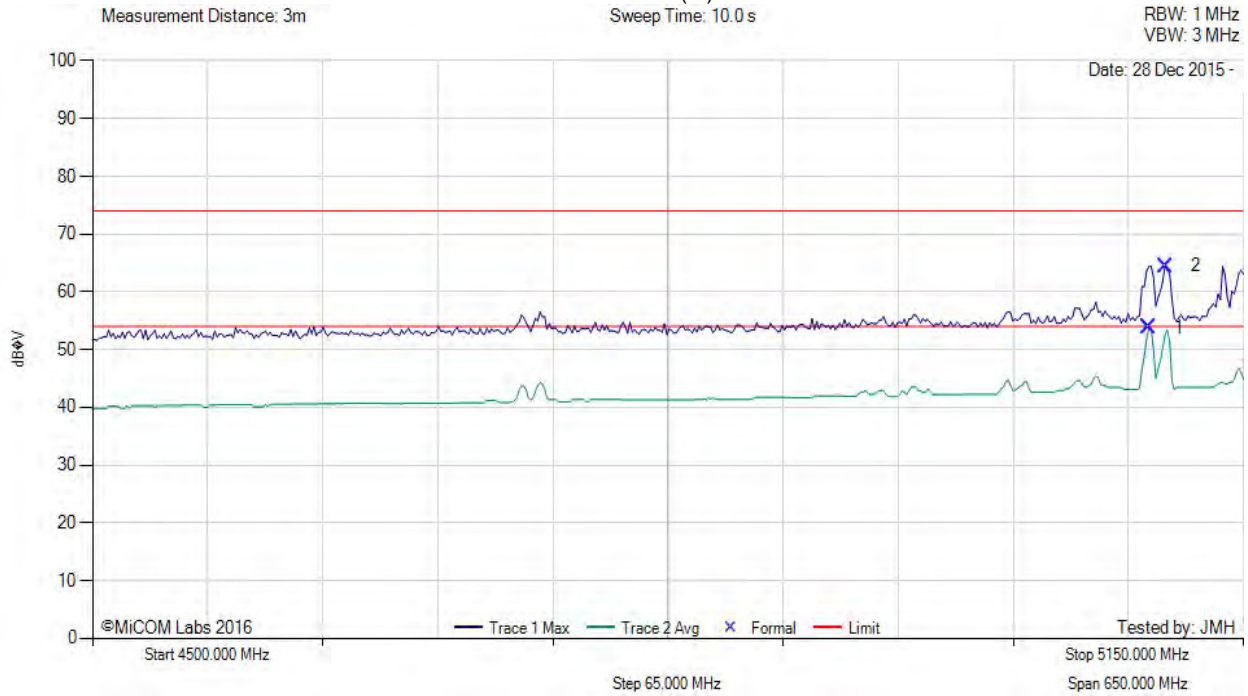

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5096.59	16.09	3.58	34.13	53.80	Max Avg	Vertical	196	39	54.0	-0.2	Pass
2	5105.71	26.74	3.57	34.13	64.44	Max Peak	Vertical	196	39	74.0	-9.6	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 370 of 405

RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11ac-80, Test Freq: 5210.00 MHz, Antenna: Aruba Networks AP-ANT-18, Power Setting: 17, Duty Cycle (%): 100

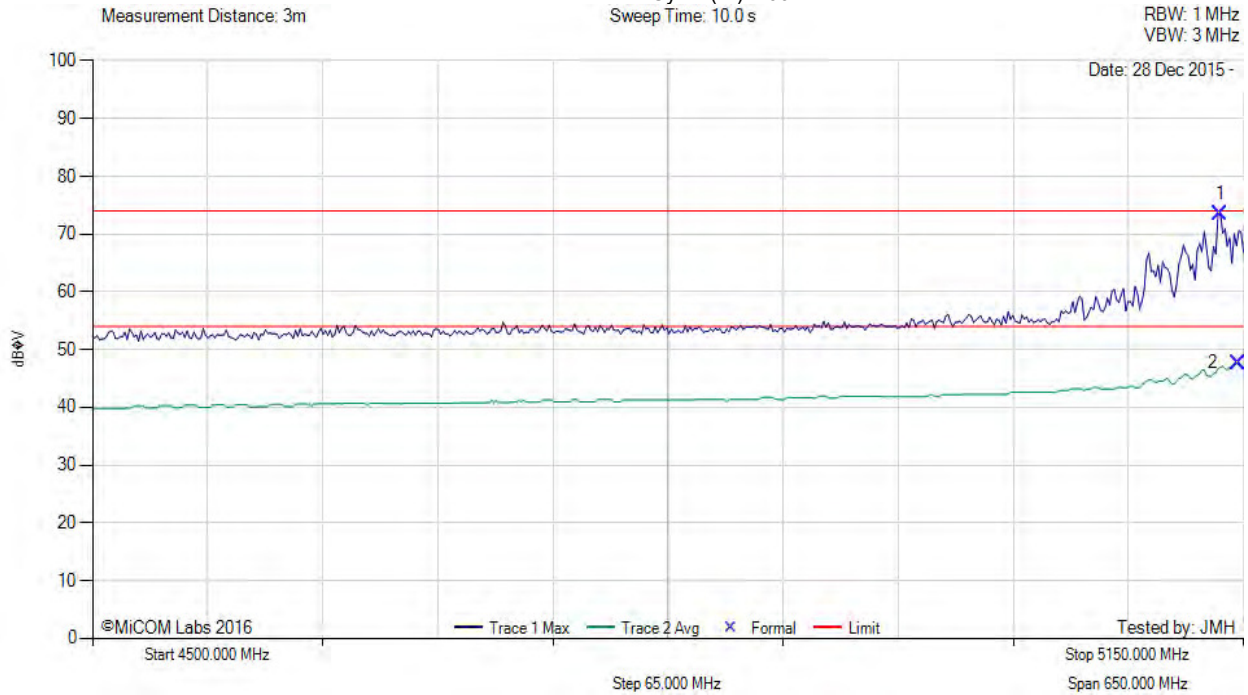

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5136.97	35.70	3.69	34.12	73.51	Max Peak	Vertical	196	39	74.0	-0.5	Pass
2	5147.39	9.91	3.68	34.11	47.70	Max Avg	Vertical	196	39	54.0	-6.3	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 371 of 405

RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11n HT-20, Test Freq: 5180.00 MHz, Antenna: Aruba Networks AP-ANT-18, Power Setting: 20, Duty Cycle (%): 100

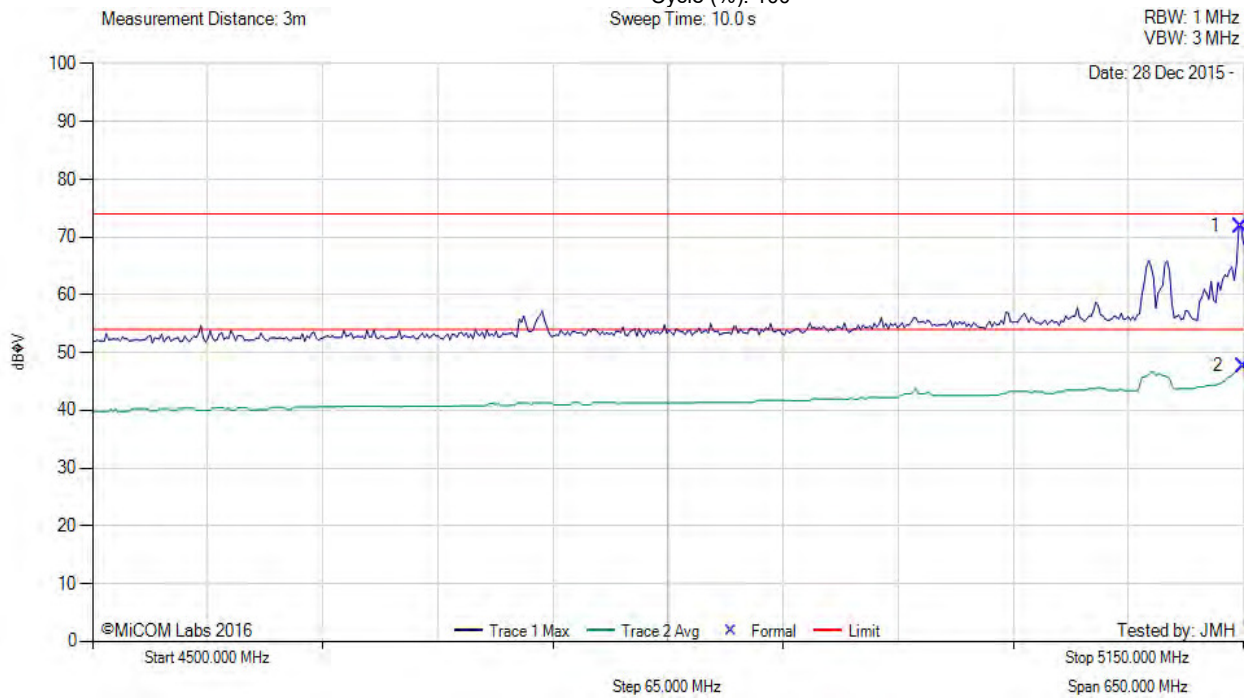

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5148.70	34.08	3.67	34.11	71.86	Max Peak	Vertical	196	39	74.0	-2.1	Pass
2	5150.00	9.93	3.67	34.11	47.71	Max Avg	Vertical	196	39	54.0	-6.3	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 372 of 405

RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11n HT-40, Test Freq: 5190.00 MHz, Antenna: Aruba Networks AP-ANT-18, Power Setting: 18, Duty Cycle (%): 100

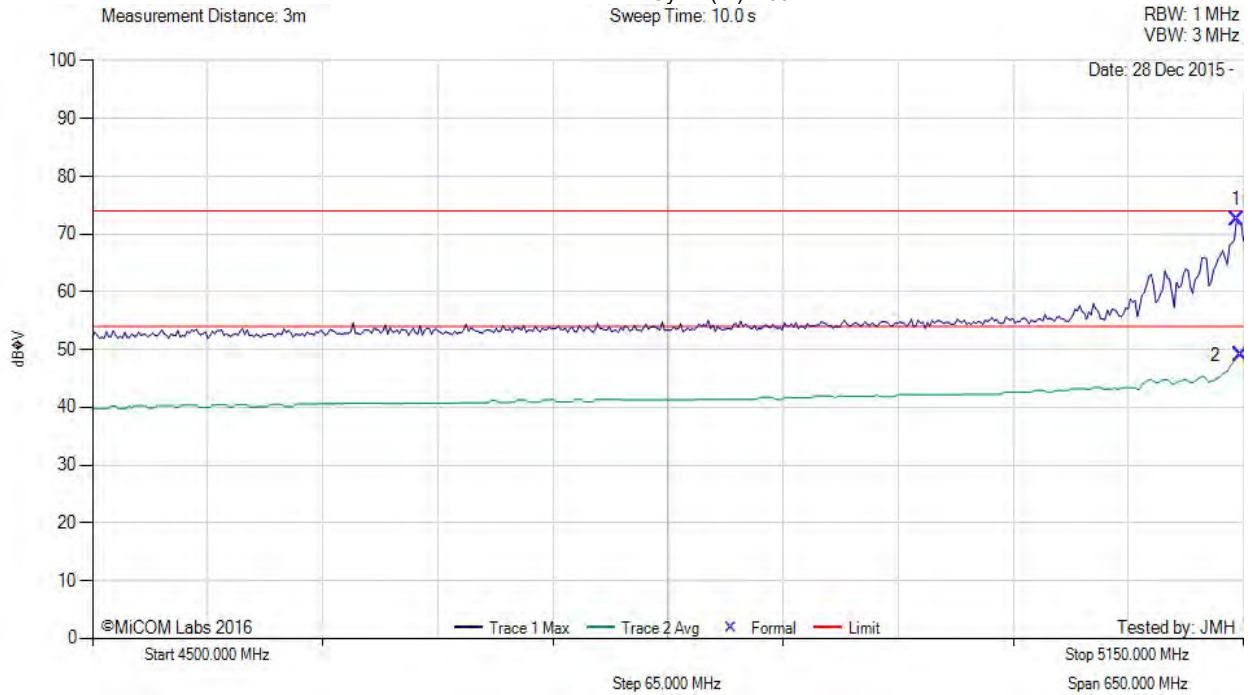

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5146.09	34.63	3.69	34.11	72.43	Max Peak	Vertical	196	39	74.0	-1.6	Pass
2	5148.70	11.29	3.67	34.11	49.07	Max Avg	Vertical	196	39	54.0	-4.9	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 373 of 405

5725 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11a, Test Freq: 5745.00 MHz, Antenna: Aruba Networks AP-ANT-18, Power Setting: 23, Duty Cycle (%): 100

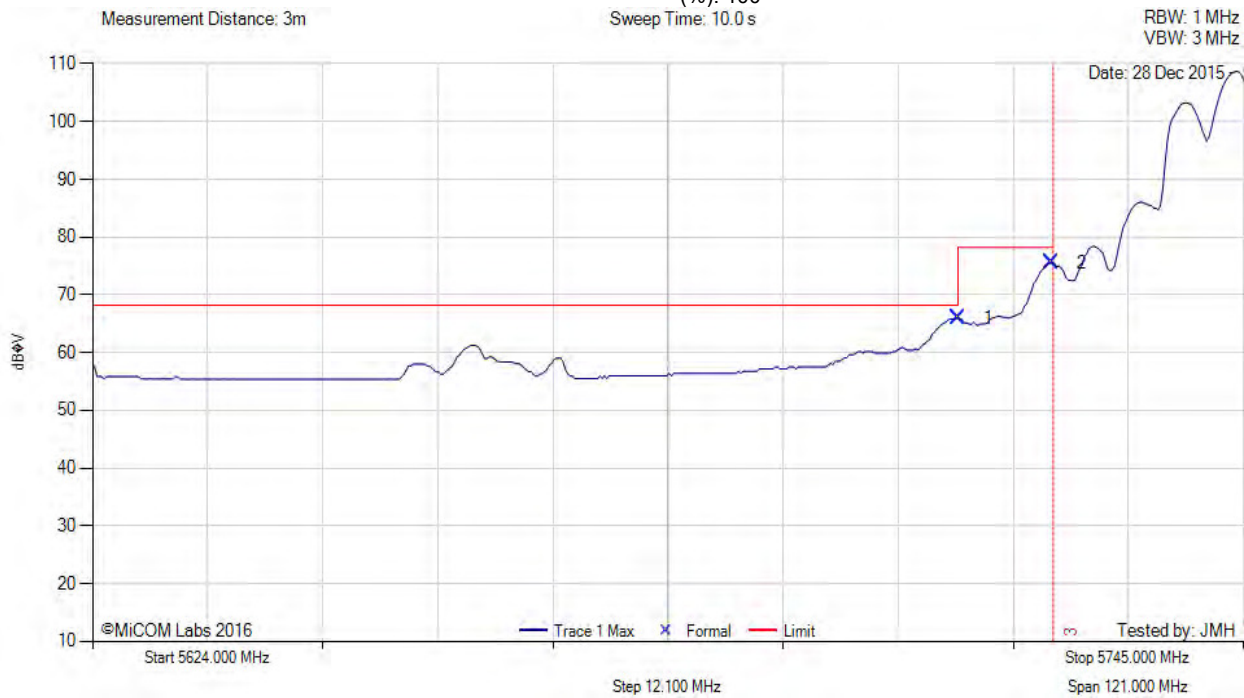

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5715.00	27.81	3.81	34.34	65.96	Marker	Vertical	191	317	68.2	-2.3	Pass
2	5724.76	37.47	3.79	34.35	75.61	Marker	Vertical	191	317	78.2	-2.6	Pass
3	5725.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 374 of 405

5725 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11ac-80, Test Freq: 5775.00 MHz, Antenna: Aruba Networks AP-ANT-18, Power Setting: 22, Duty Cycle (%): 100

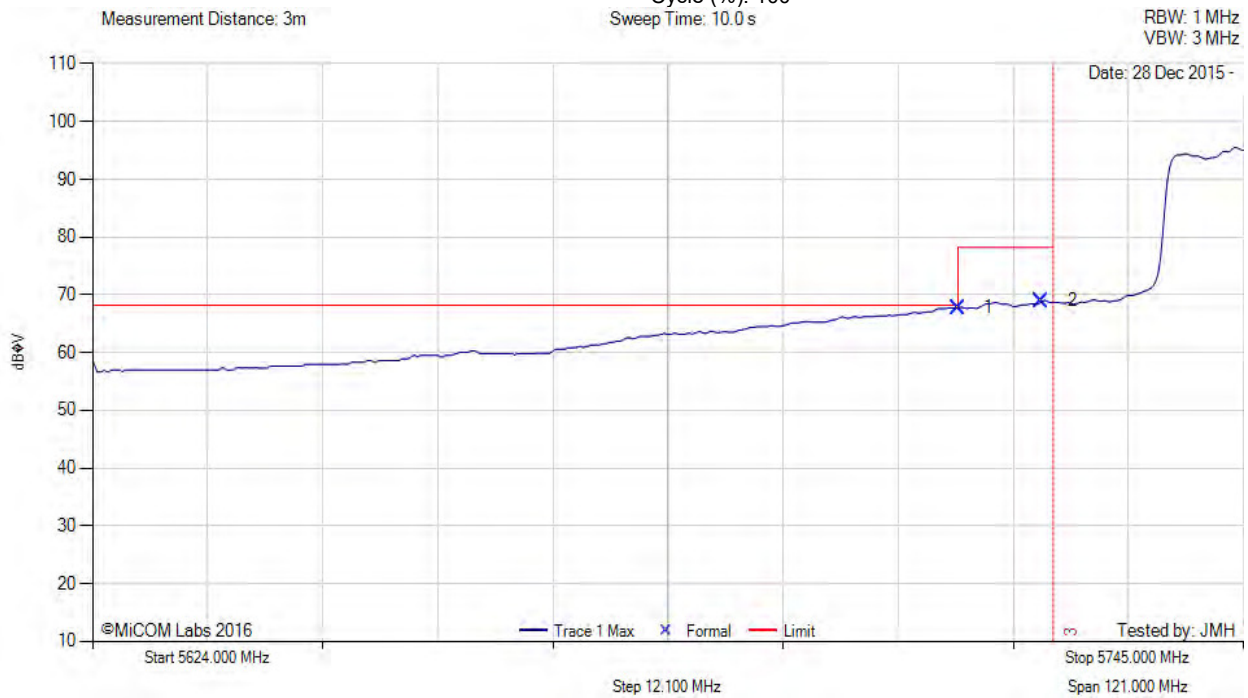

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5715.00	29.59	3.81	34.34	67.74	Marker	Vertical	191	317	68.2	-0.5	Pass
2	5723.79	30.81	3.79	34.35	68.95	Marker	Vertical	191	317	78.2	-9.3	Pass
3	5725.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 375 of 405

5725 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11n HT-20, Test Freq: 5745.00 MHz, Antenna: Aruba Networks AP-ANT-18, Power Setting: 23, Duty Cycle (%): 100

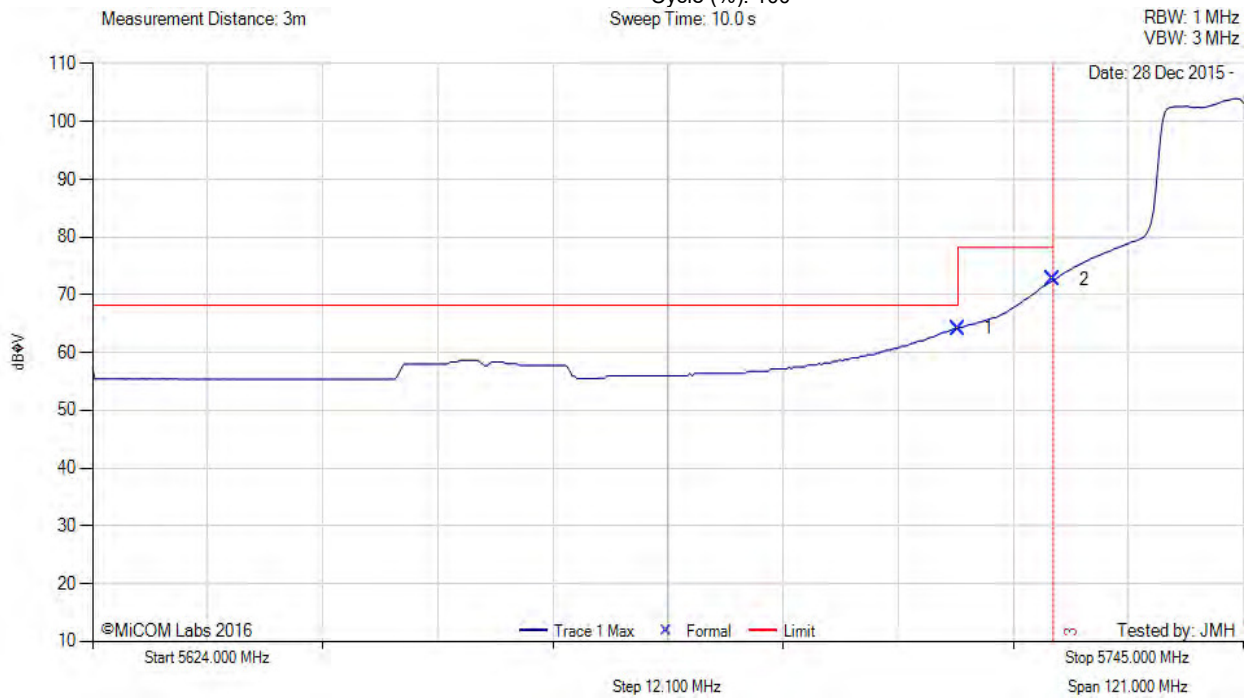

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5715.00	26.07	3.81	34.34	64.22	Marker	Vertical	191	317	68.2	-4.0	Pass
2	5725.00	34.49	3.79	34.35	72.63	Marker	Vertical	191	317	78.2	-5.6	Pass
3	5725.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 376 of 405

5725 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11n HT-40, Test Freq: 5755.00 MHz, Antenna: Aruba Networks AP-ANT-18, Power Setting: 22, Duty Cycle (%): 100

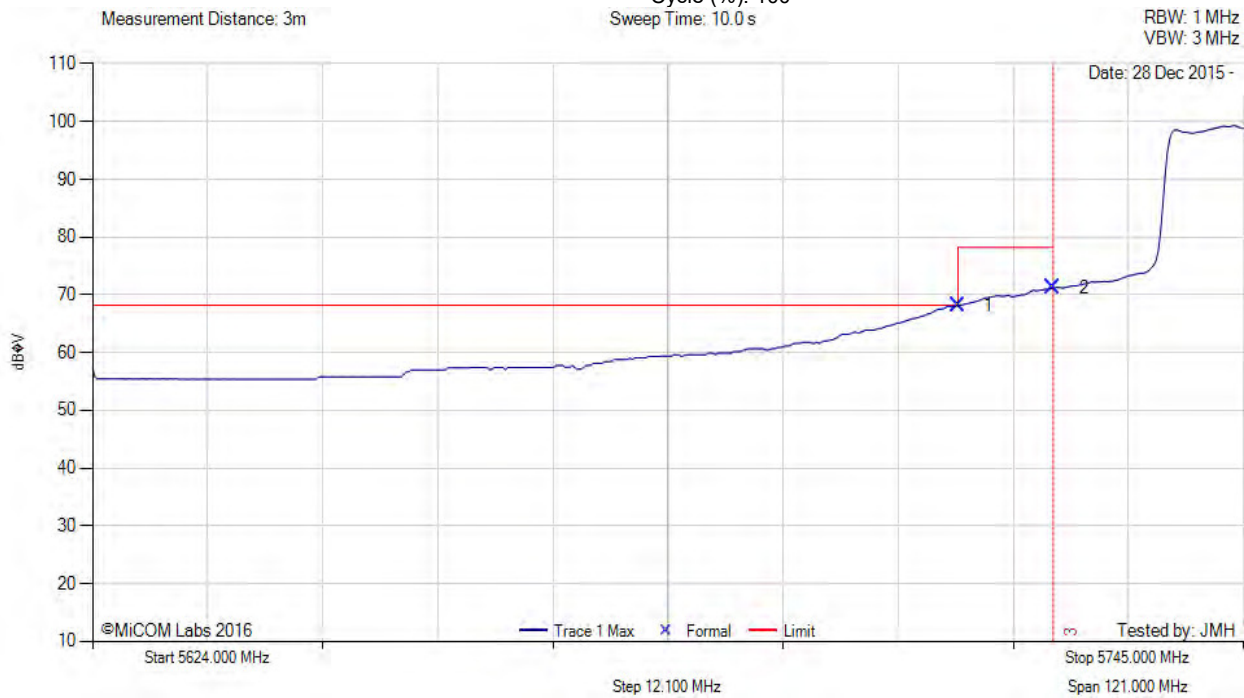

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5715.00	30.01	3.81	34.34	68.16	Marker	Vertical	191	317	68.2	-0.1	Pass
2	5725.00	33.03	3.79	34.35	71.17	Marker	Vertical	191	317	78.2	-7.1	Pass
3	5725.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 377 of 405

5850 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11a, Test Freq: 5825.00 MHz, Antenna: Aruba Networks AP-ANT-18, Power Setting: 23, Duty Cycle (%): 100

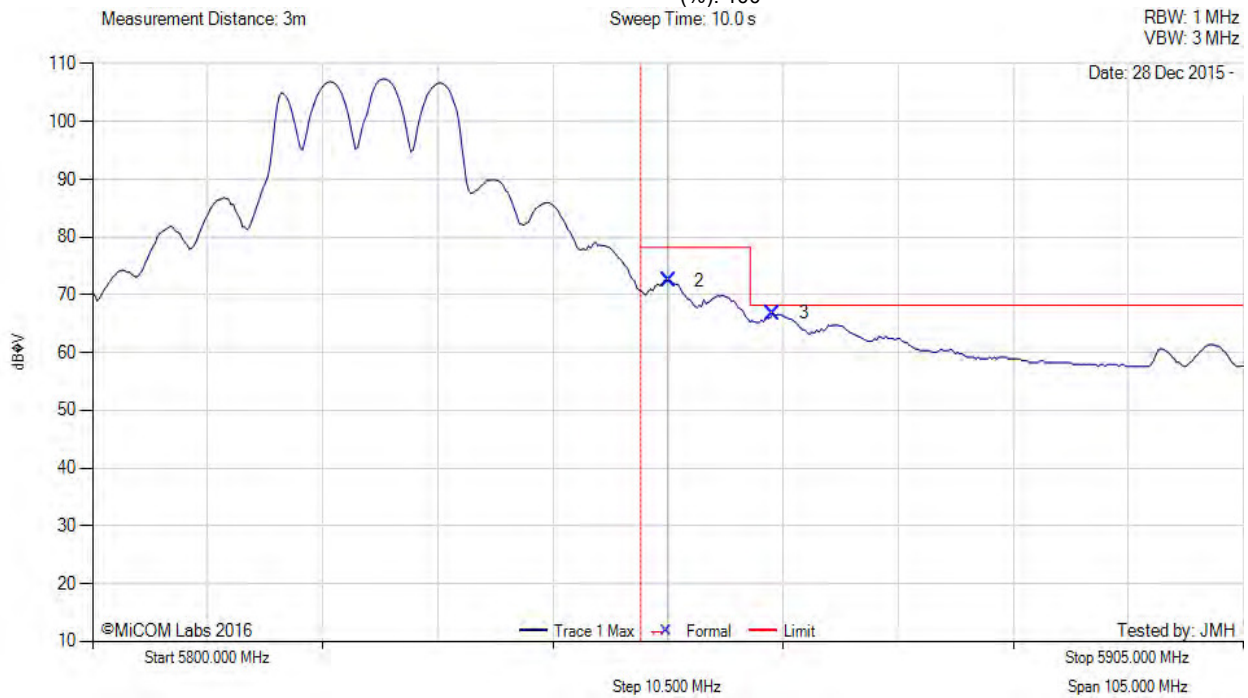

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5850.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	
2	5852.53	34.01	3.82	34.63	72.46	Marker	Vertical	180	289	78.2	-5.8	Pass
3	5862.10	28.34	3.85	34.66	66.85	Marker	Vertical	180	289	68.2	-1.4	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 378 of 405

5850 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11ac-80, Test Freq: 5775.00 MHz, Antenna: Aruba Networks AP-ANT-18, Power Setting: 22, Duty Cycle (%): 100

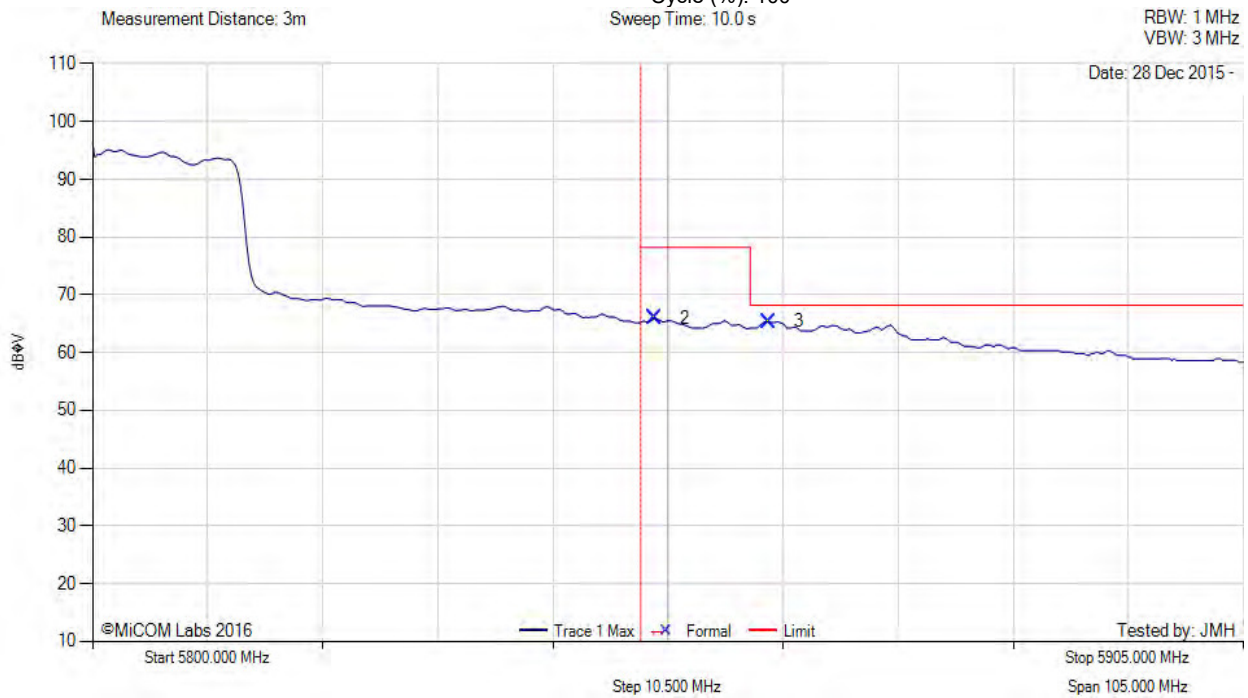

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5850.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	
2	5851.26	27.46	3.81	34.63	65.90	Marker	Vertical	180	289	78.2	-12.3	Pass
3	5861.68	26.85	3.85	34.66	65.36	Marker	Vertical	180	289	68.2	-2.9	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 379 of 405

5850 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11n HT-20, Test Freq: 5825.00 MHz, Antenna: Aruba Networks AP-ANT-18, Power Setting: 23, Duty Cycle (%): 100

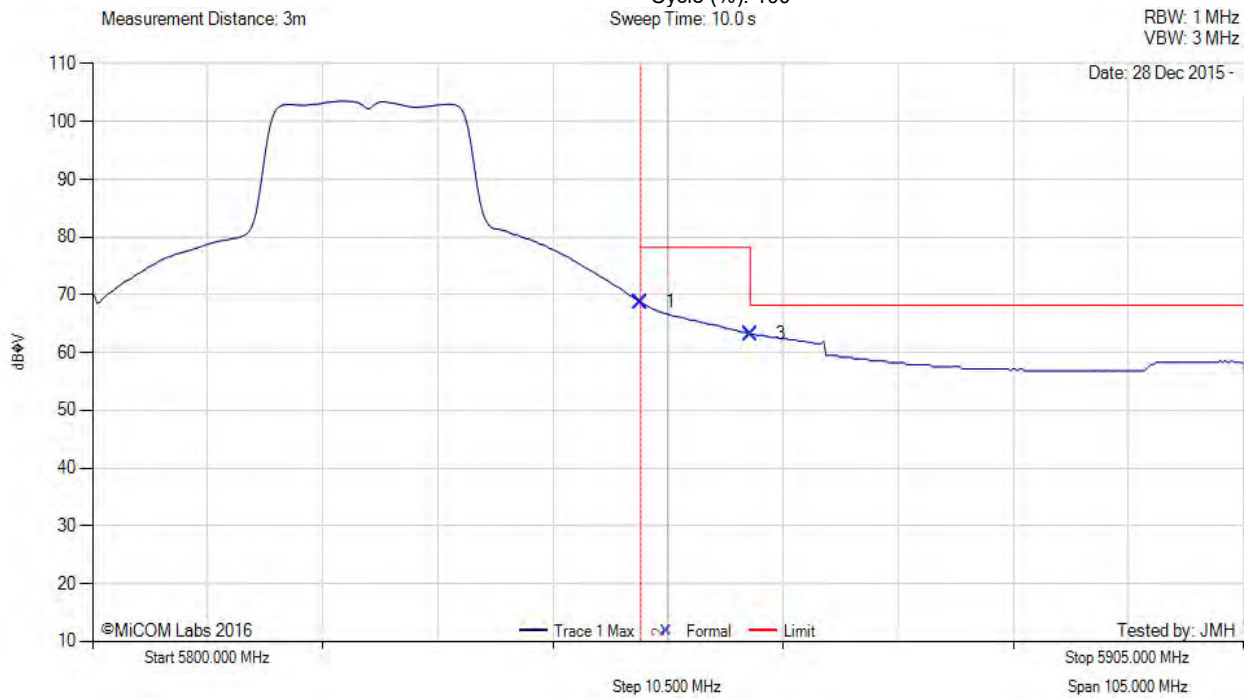

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5850.00	30.26	3.81	34.63	68.70	Marker	Vertical	180	289	78.2	-9.5	Pass
2	5850.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	
3	5860.00	24.68	3.86	34.65	63.19	Marker	Vertical	180	289	68.2	-5.0	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 380 of 405

5850 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11n HT-40, Test Freq: 5795.00 MHz, Antenna: Aruba Networks AP-ANT-18, Power Setting: 23, Duty Cycle (%): 100

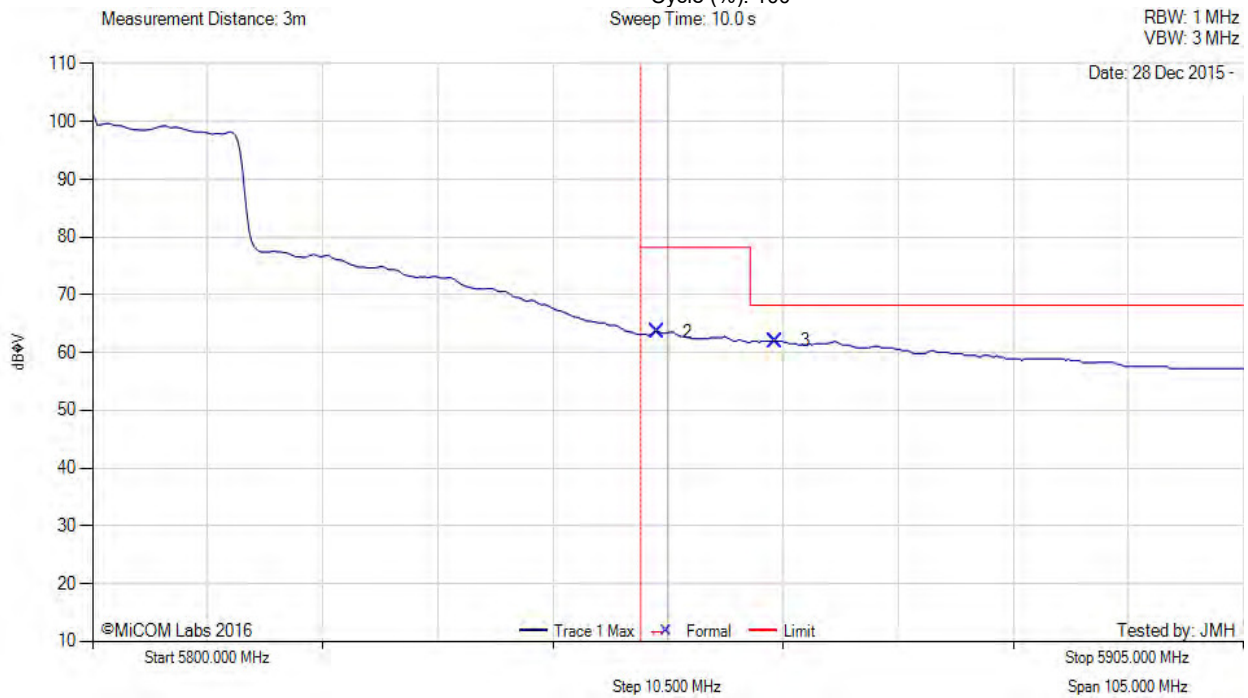

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5850.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	
2	5851.47	25.10	3.81	34.63	63.54	Marker	Vertical	180	289	78.2	-14.7	Pass
3	5862.31	23.48	3.85	34.66	61.99	Marker	Vertical	180	289	68.2	-6.2	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 381 of 405

A.4.5 Antenna AP-ANT-19

RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11a, Test Freq: 5180.00 MHz, Antenna: Aruba Networks AP-ANT-19, Power Setting: 11, Duty Cycle (%): 100

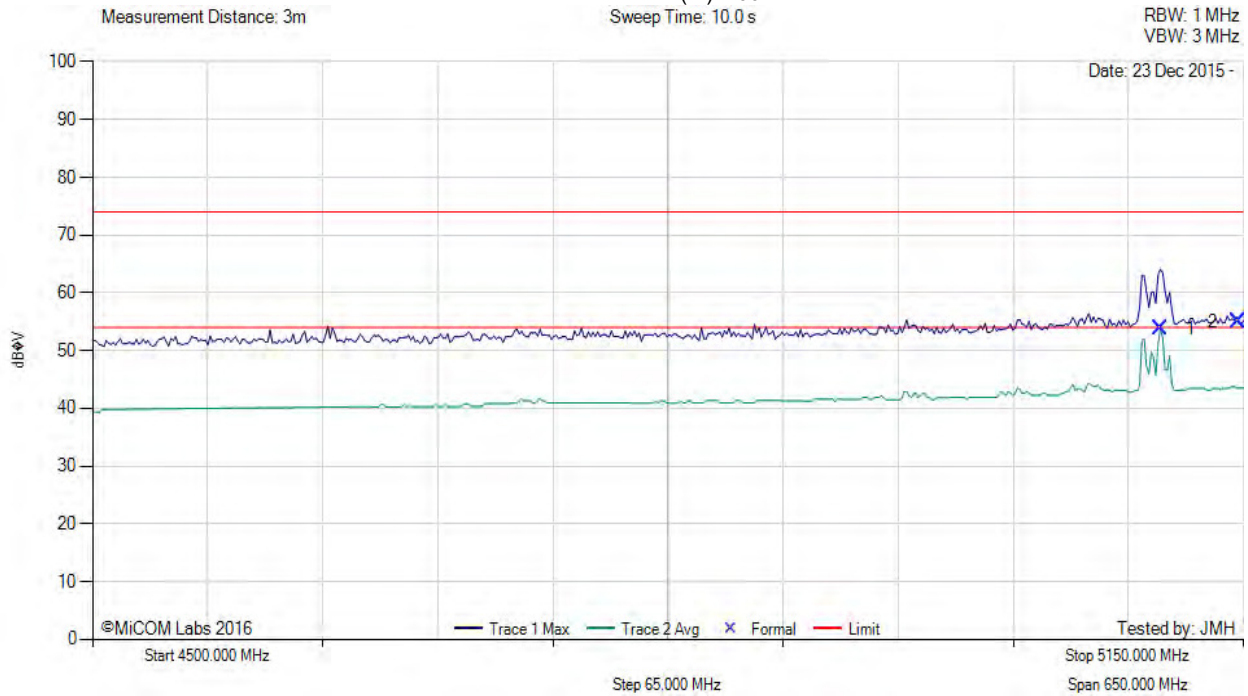

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5103.11	16.11	3.58	34.13	53.82	Max Avg	Vertical	159	38	54.0	-0.2	Pass
2	5147.39	17.30	3.68	34.11	55.09	Max Peak	Vertical	159	38	74.0	-18.9	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 382 of 405

RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11ac-80, Test Freq: 5210.00 MHz, Antenna: Aruba Networks AP-ANT-19, Power Setting: 15.25, Duty Cycle (%): 100

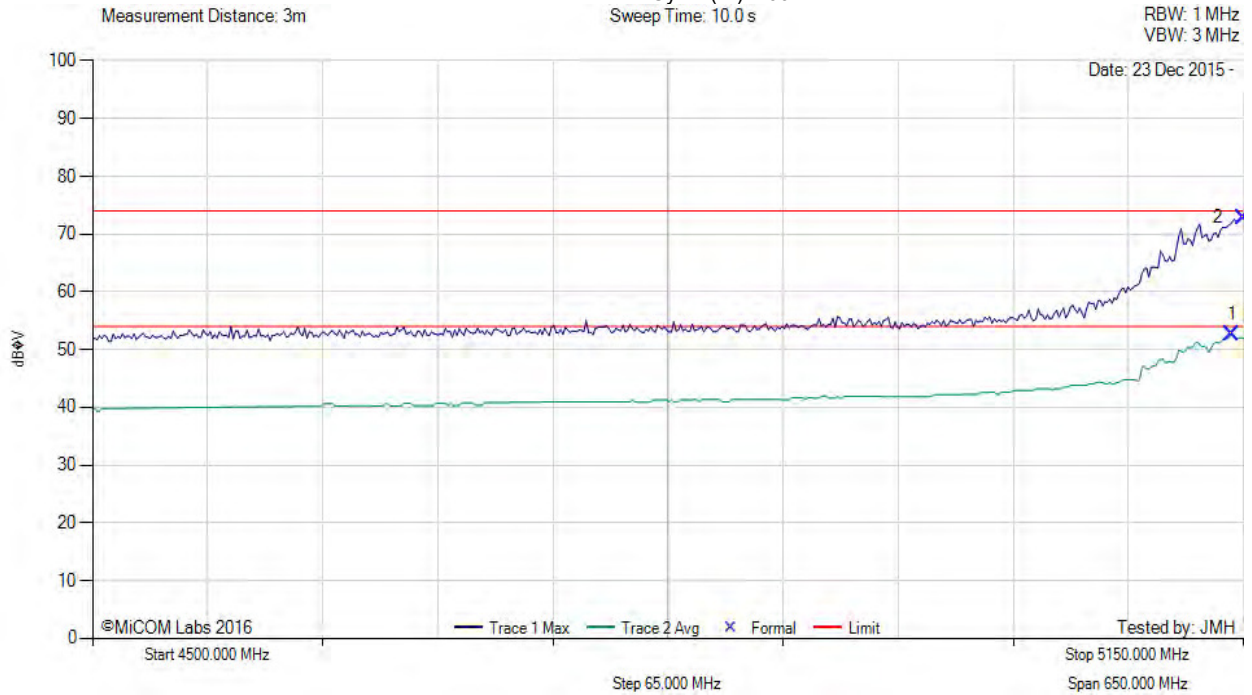

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5143.49	14.82	3.70	34.12	52.64	Max Avg	Vertical	159	38	54.0	-1.4	Pass
2	5150.00	35.11	3.67	34.11	72.89	Max Peak	Vertical	159	38	74.0	-1.1	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 383 of 405

RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11n HT-20, Test Freq: 5180.00 MHz, Antenna: Aruba Networks AP-ANT-19, Power Setting: 18, Duty Cycle (%): 100

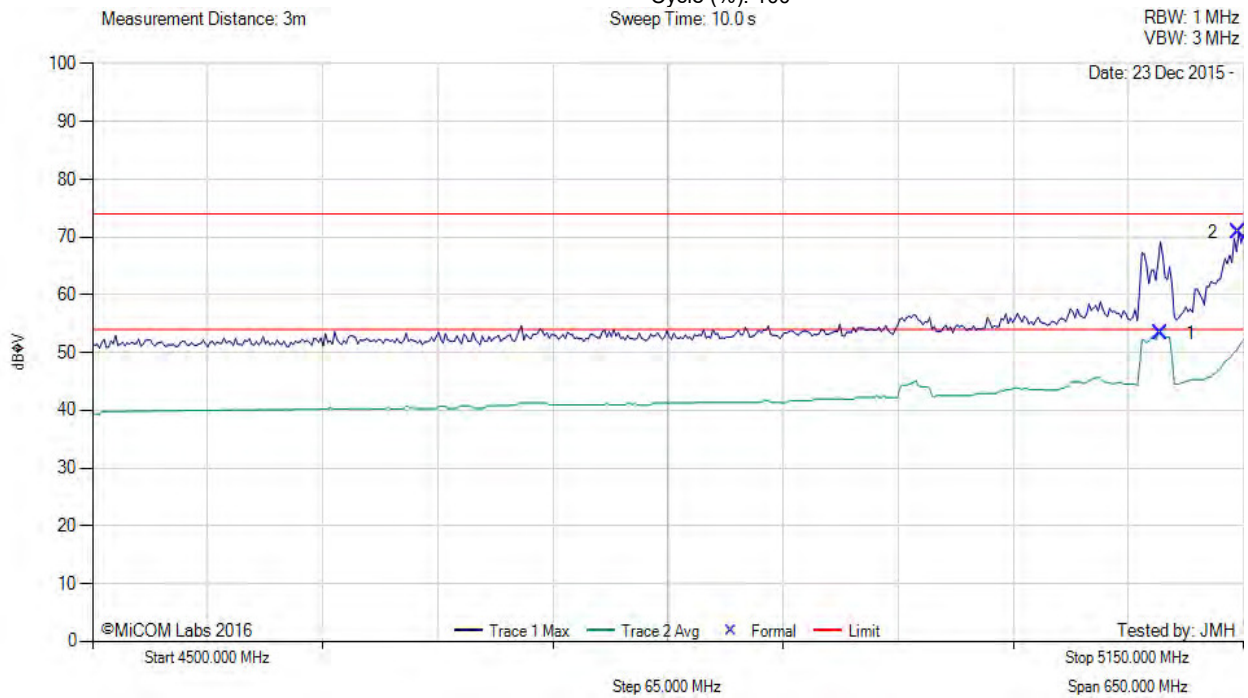

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5103.11	15.64	3.58	34.13	53.35	Max Avg	Vertical	159	38	54.0	-0.7	Pass
2	5147.39	32.97	3.68	34.11	70.76	Max Peak	Vertical	159	38	74.0	-3.2	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 384 of 405

RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11n HT-40, Test Freq: 5190.00 MHz, Antenna: Aruba Networks AP-ANT-19, Power Setting: 15.5, Duty Cycle (%): 100

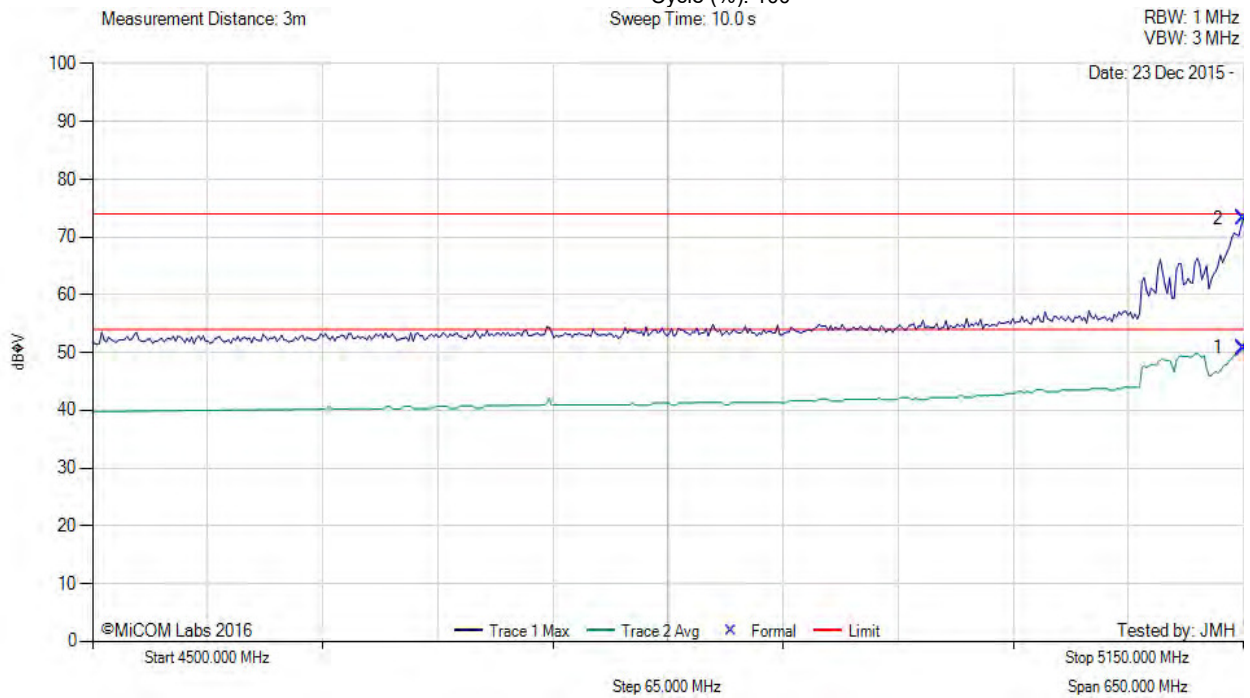

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5150.00	13.01	3.67	34.11	50.79	Max Avg	Vertical	159	38	54.0	-3.2	Pass
2	5150.00	35.43	3.67	34.11	73.21	Max Peak	Vertical	159	38	74.0	-0.8	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 385 of 405

5725 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11a, Test Freq: 5745.00 MHz, Antenna: Aruba Networks AP-ANT-19, Power Setting: 21, Duty Cycle (%): 100

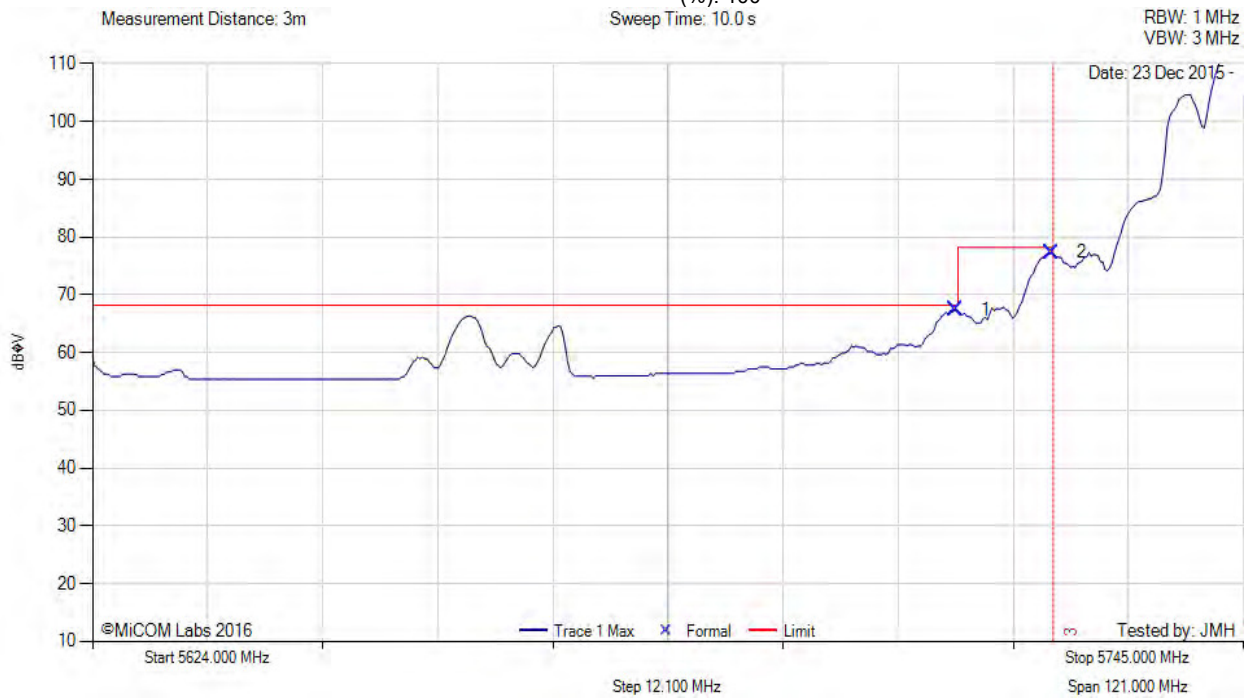

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5714.76	29.26	3.81	34.34	67.41	Marker	Vertical	152	6	68.2	-0.8	Pass
2	5724.76	39.19	3.79	34.35	77.33	Marker	Vertical	152	6	78.2	-0.9	Pass
3	5725.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 386 of 405

5725 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11ac-80, Test Freq: 5775.00 MHz, Antenna: Aruba Networks AP-ANT-19, Power Setting: 21, Duty Cycle (%): 100

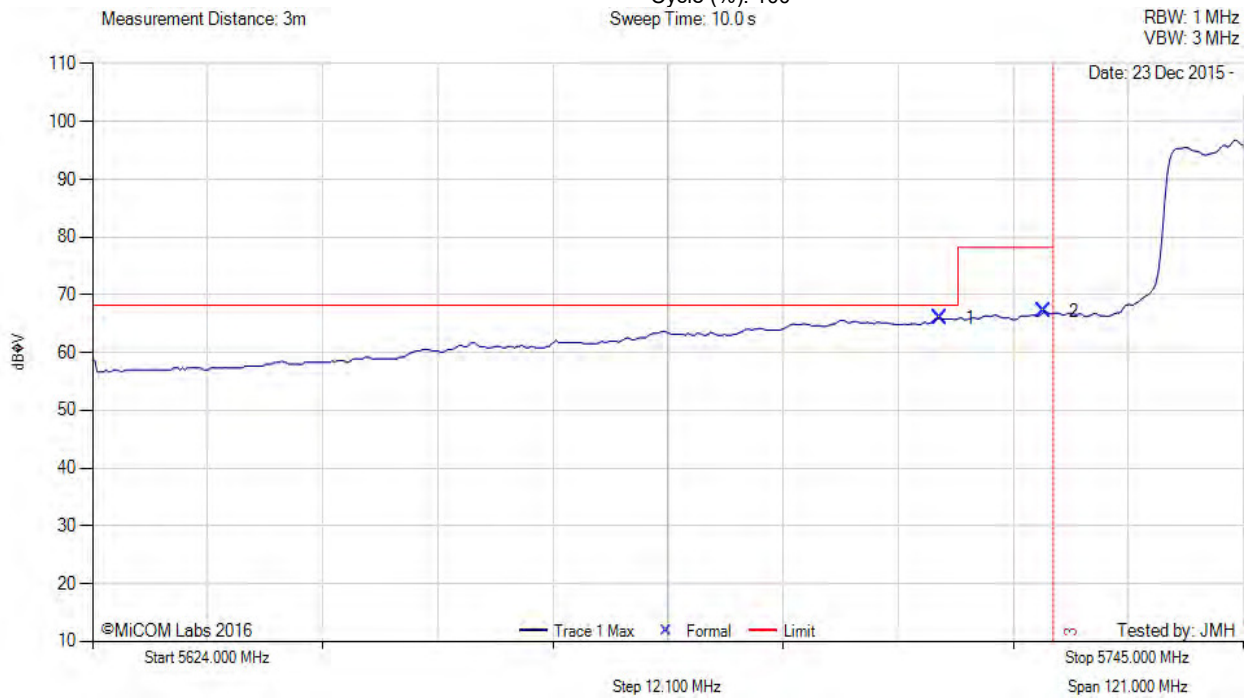

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5713.06	27.80	3.82	34.34	65.96	Marker	Vertical	152	6	68.2	-2.3	Pass
2	5724.03	29.06	3.79	34.35	67.20	Marker	Vertical	152	6	78.2	-11.0	Pass
3	5725.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 387 of 405

5725 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11n HT-20, Test Freq: 5745.00 MHz, Antenna: Aruba Networks AP-ANT-19, Power Setting: 23, Duty Cycle (%): 100

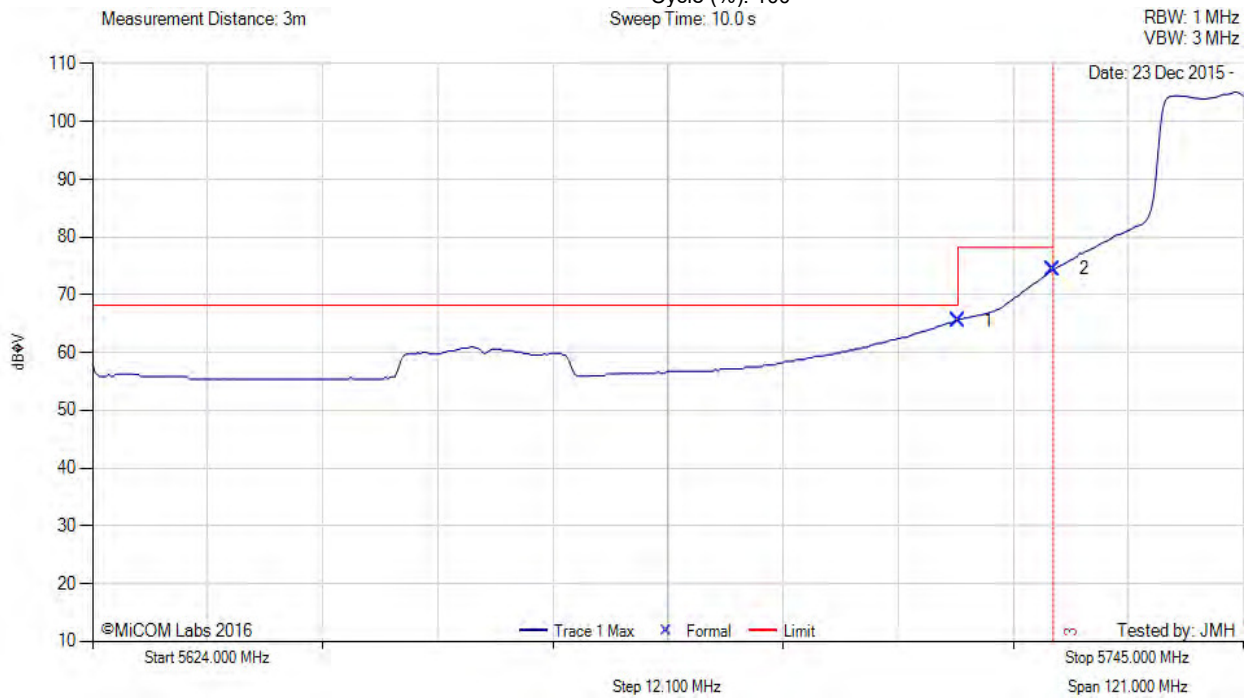

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5715.00	27.41	3.81	34.34	65.56	Marker	Vertical	152	6	68.2	-2.7	Pass
2	5725.00	36.31	3.79	34.35	74.45	Marker	Vertical	152	6	78.2	-3.8	Pass
3	5725.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 388 of 405

5725 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11n HT-40, Test Freq: 5755.00 MHz, Antenna: Aruba Networks AP-ANT-19, Power Setting: 21, Duty Cycle (%): 100

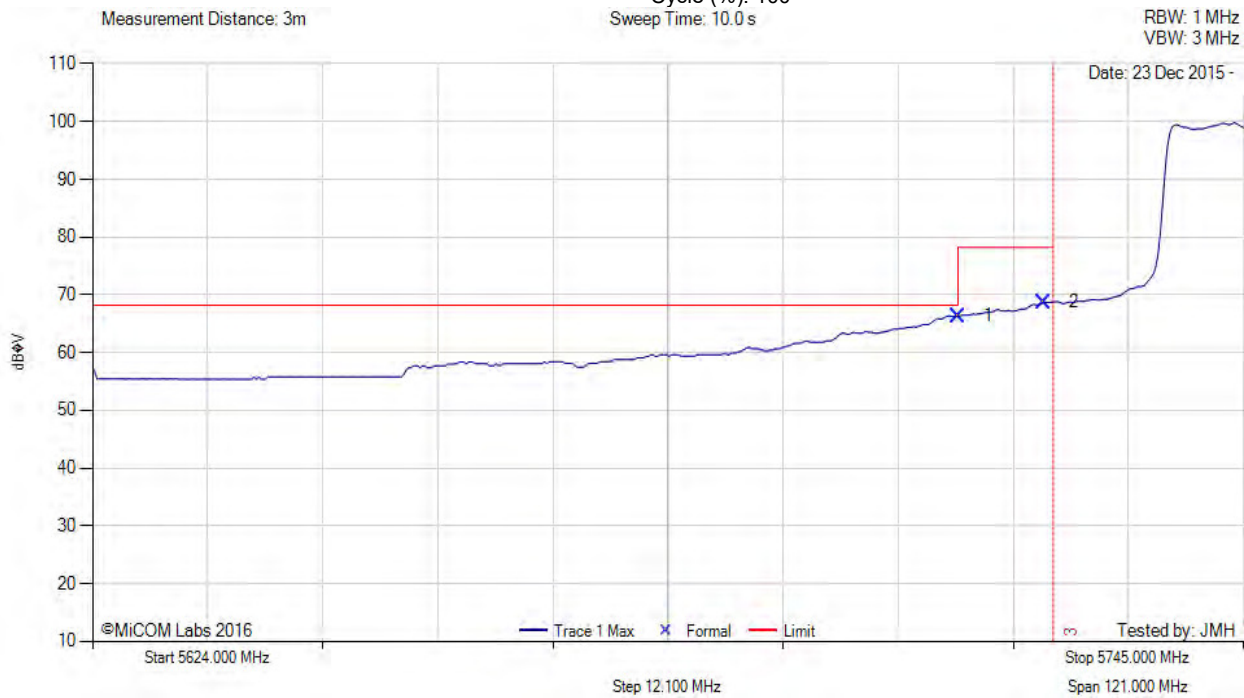

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5715.00	28.20	3.81	34.34	66.35	Marker	Vertical	152	6	68.2	-1.9	Pass
2	5724.03	30.63	3.79	34.35	68.77	Marker	Vertical	152	6	78.2	-9.5	Pass
3	5725.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 389 of 405

5850 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11a, Test Freq: 5825.00 MHz, Antenna: Aruba Networks AP-ANT-19, Power Setting: 21, Duty Cycle (%): 100

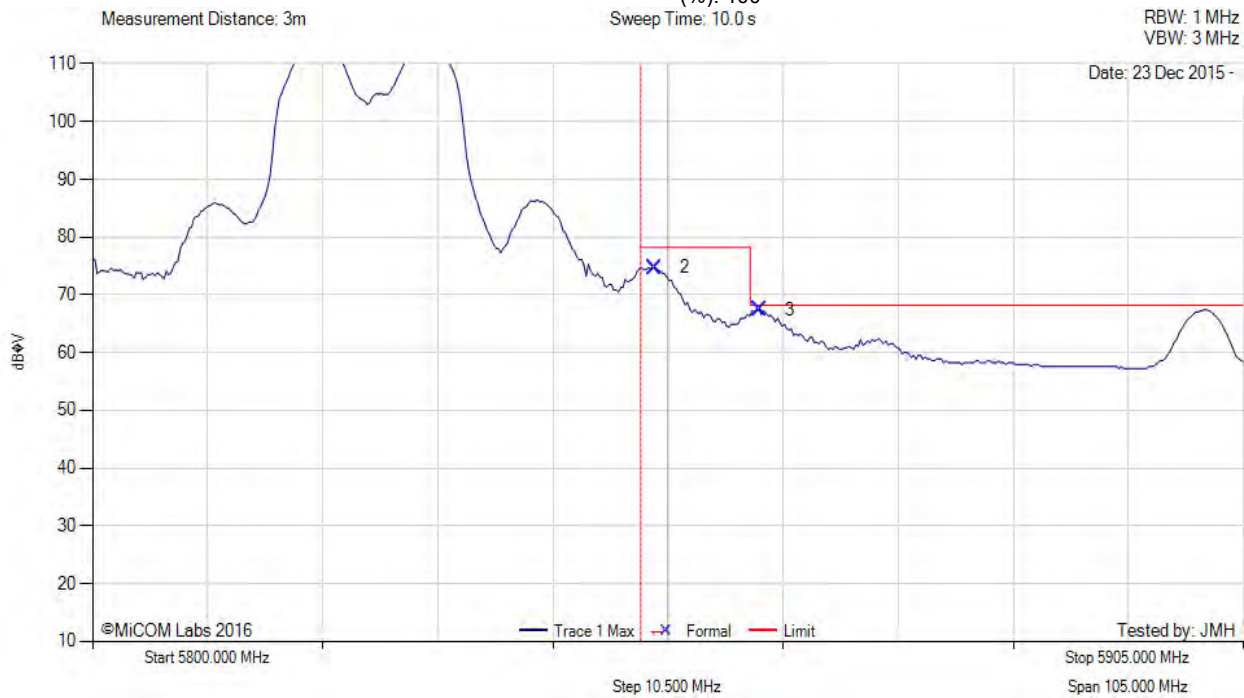

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5850.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	
2	5851.26	36.29	3.81	34.63	74.73	Marker	Vertical	150	362	78.2	-3.5	Pass
3	5860.84	28.92	3.86	34.66	67.44	Marker	Vertical	150	362	68.2	-0.8	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 390 of 405

5850 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11ac-80, Test Freq: 5775.00 MHz, Antenna: Aruba Networks AP-ANT-19, Power Setting: 21, Duty Cycle (%): 100

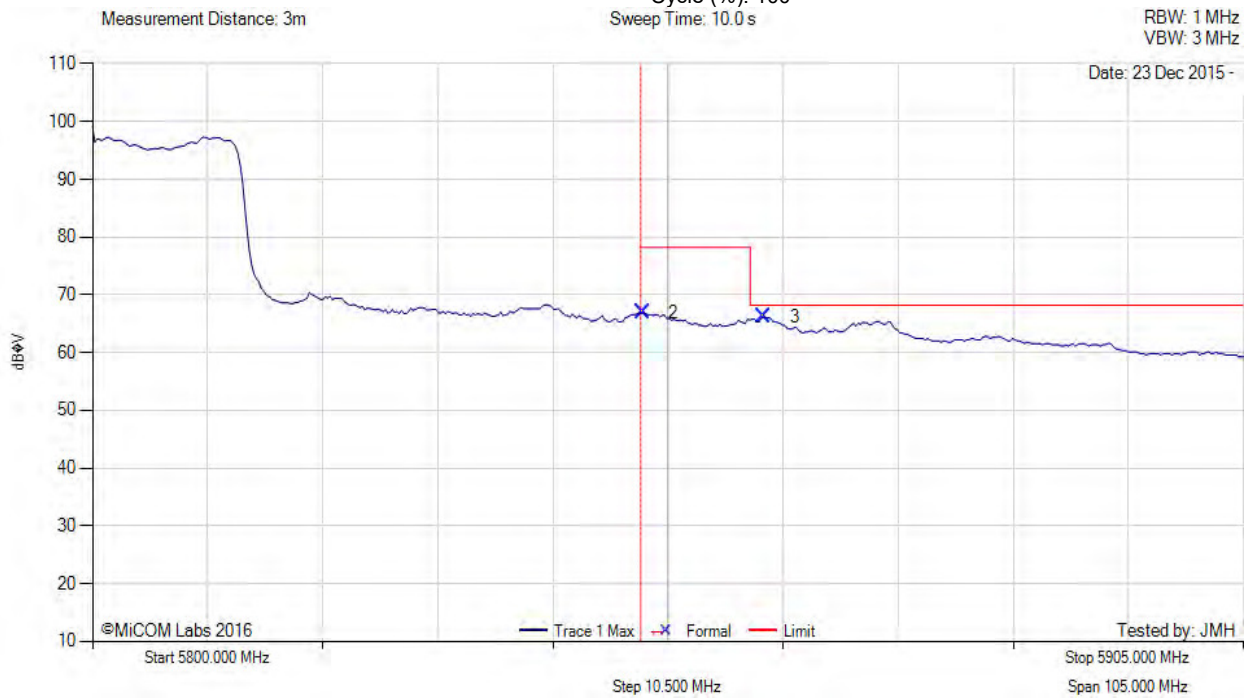

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5850.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	
2	5850.21	28.50	3.81	34.63	66.94	Marker	Vertical	150	362	78.2	-11.3	Pass
3	5861.26	27.68	3.86	34.66	66.20	Marker	Vertical	150	362	68.2	-2.0	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 391 of 405

5850 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11n HT-20, Test Freq: 5825.00 MHz, Antenna: Aruba Networks AP-ANT-19, Power Setting: 23, Duty Cycle (%): 100

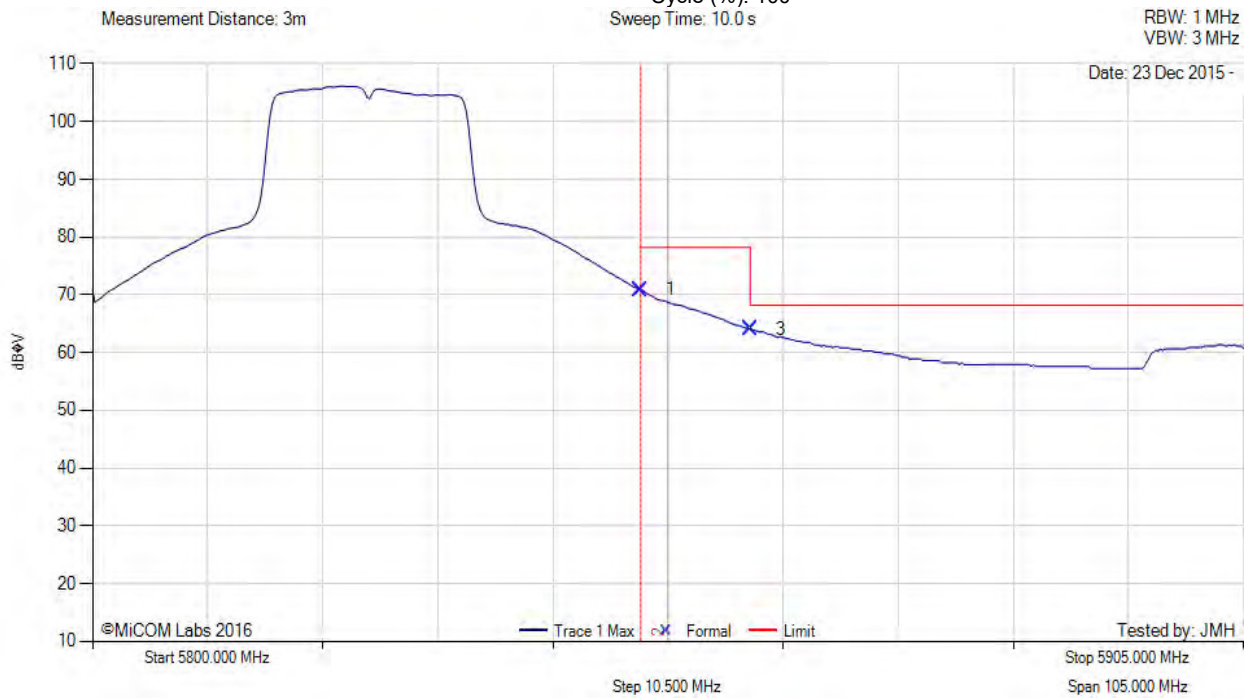

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5850.00	32.46	3.81	34.63	70.90	Marker	Vertical	150	362	78.2	-7.3	Pass
2	5850.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	
3	5860.00	25.58	3.86	34.65	64.09	Marker	Vertical	150	362	68.2	-4.1	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 392 of 405

5850 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11n HT-40, Test Freq: 5795.00 MHz, Antenna: Aruba Networks AP-ANT-19, Power Setting: 23, Duty Cycle (%): 100

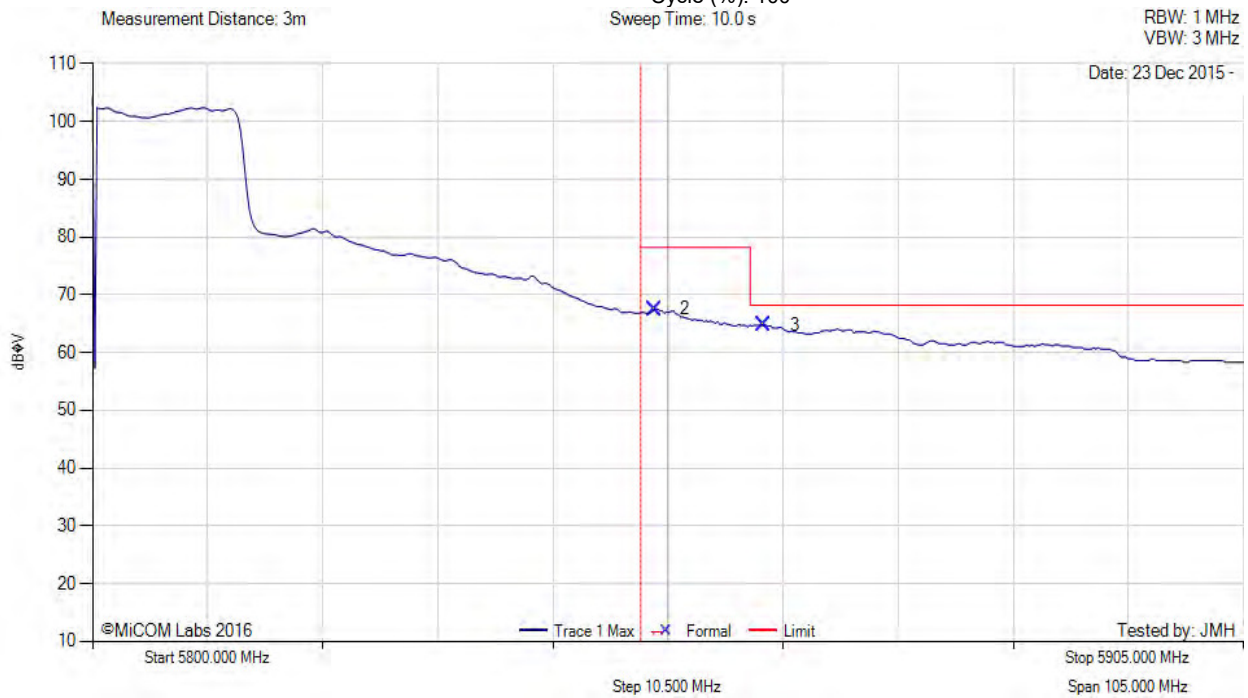

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5850.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	
2	5851.26	29.09	3.81	34.63	67.53	Marker	Vertical	150	362	78.2	-10.7	Pass
3	5861.26	26.23	3.86	34.66	64.75	Marker	Vertical	150	362	68.2	-3.5	Pass

Test Notes: EUT on 150cm table. Powered by PDSine 9001GR POE

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 393 of 405

A.4.6 Antenna Integral (APIN0225)

RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11a, Test Freq: 5180.00 MHz, Antenna: Aruba Networks Metal Sheet, Power Setting: 10, Duty Cycle (%): 100

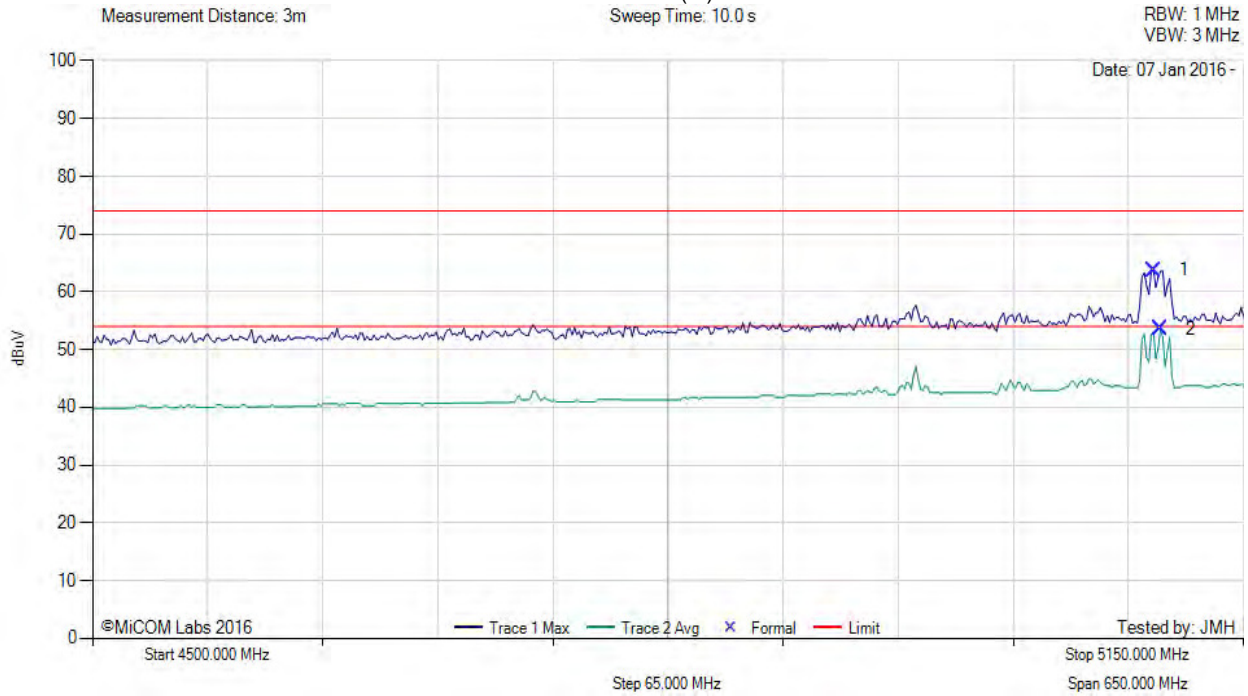

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5099.20	26.02	3.58	34.13	63.73	Max Peak	Horizontal	152	79	74.0	-10.3	Pass
2	5103.11	15.83	3.58	34.13	53.54	Max Avg	Horizontal	152	79	54.0	-0.5	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 394 of 405

RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11ac-80, Test Freq: 5210.00 MHz, Antenna: Aruba Networks Metal Sheet, Power Setting: 14, Duty Cycle (%): 100

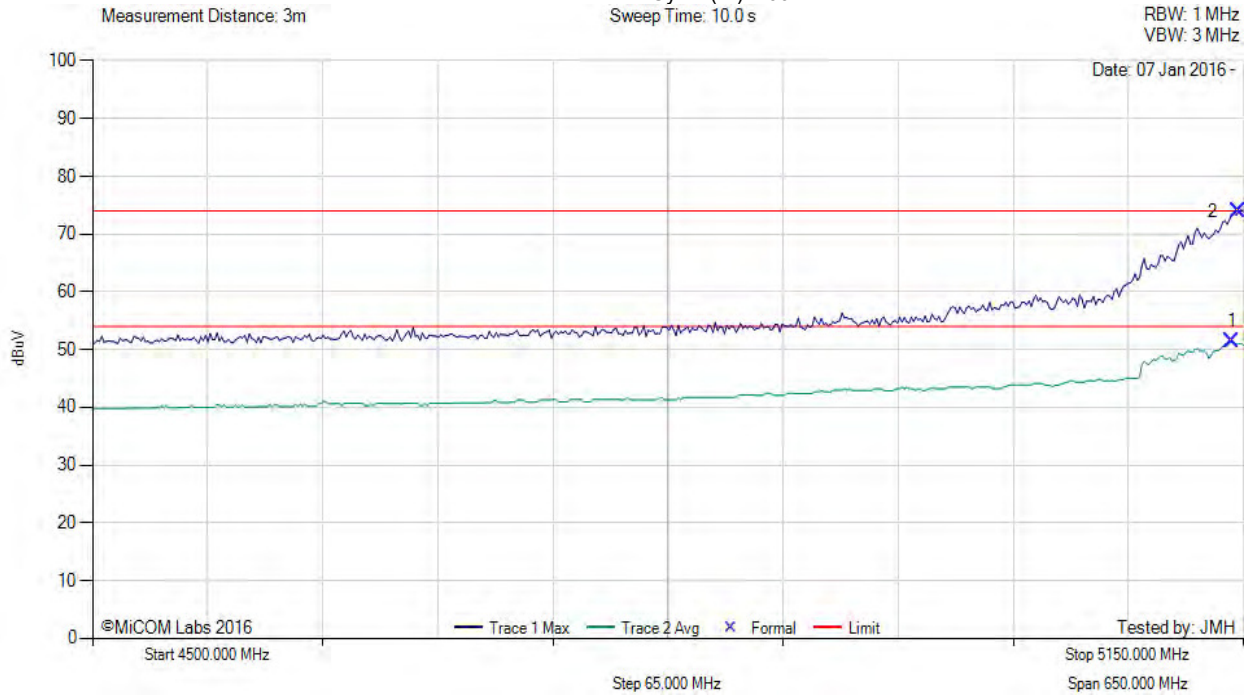

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5143.49	13.58	3.70	34.12	51.40	Max Avg	Horizontal	152	79	54.0	-2.6	Pass
2	5147.39	36.19	3.68	34.11	73.98	Max Peak	Horizontal	152	79	74.0	0.0	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 395 of 405

RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11n HT-20, Test Freq: 5180.00 MHz, Antenna: Aruba Networks Metal Sheet, Power Setting: 15.75,
 Duty Cycle (%): 100
 Sweep Time: 10.0 s

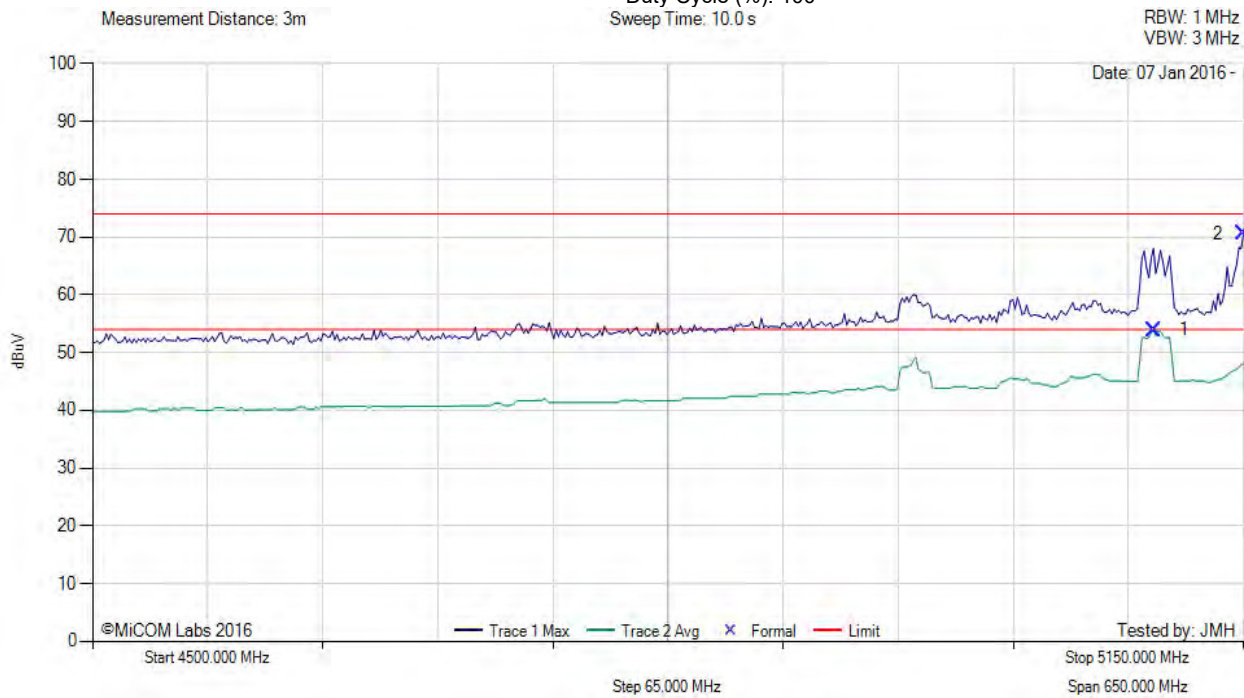

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5099.20	16.19	3.58	34.13	53.90	Max Avg	Horizontal	152	79	54.0	-0.1	Pass
2	5150.00	32.77	3.67	34.11	70.55	Max Peak	Horizontal	152	79	74.0	-3.5	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 396 of 405

RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11n HT-40, Test Freq: 5190.00 MHz, Antenna: Aruba Networks Metal Sheet, Power Setting: 15.25,
 Duty Cycle (%): 100
 Sweep Time: 10.0 s

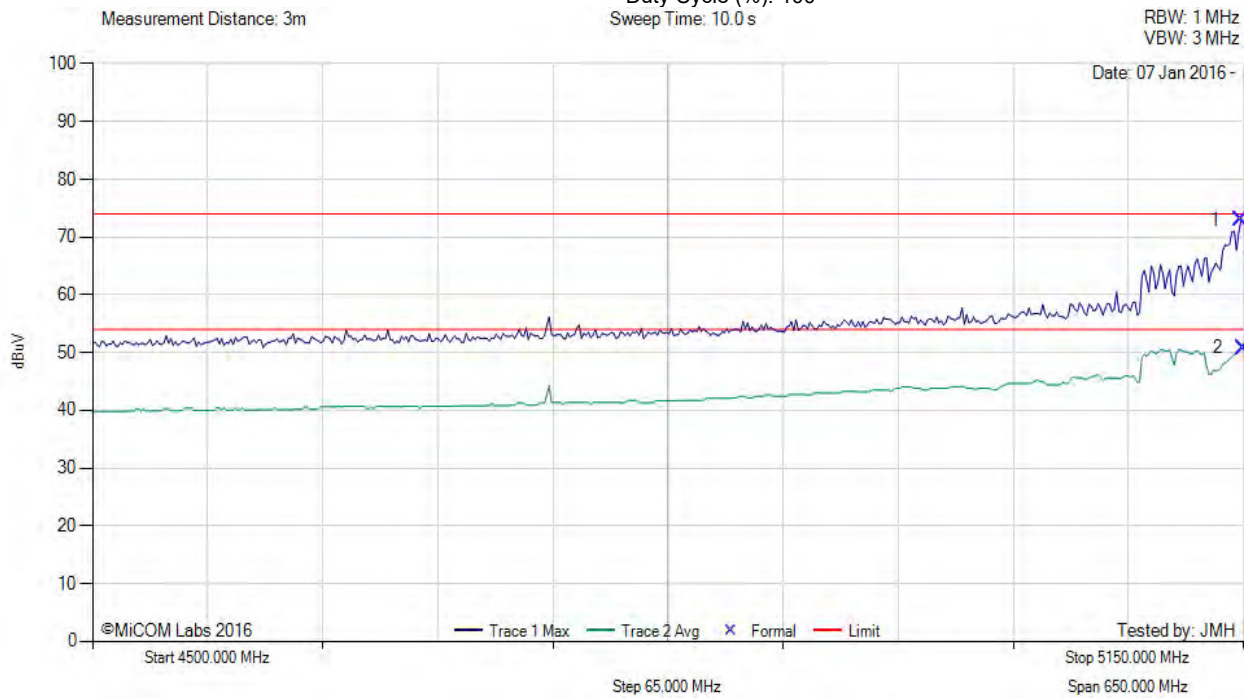

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5148.70	35.26	3.67	34.11	73.04	Max Peak	Horizontal	152	79	74.0	-1.0	Pass
2	5150.00	13.01	3.67	34.11	50.79	Max Avg	Horizontal	152	79	54.0	-3.2	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 397 of 405

5725 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11a, Test Freq: 5745.00 MHz, Antenna: Aruba Networks Metal Sheet, Power Setting: 22, Duty Cycle (%): 100

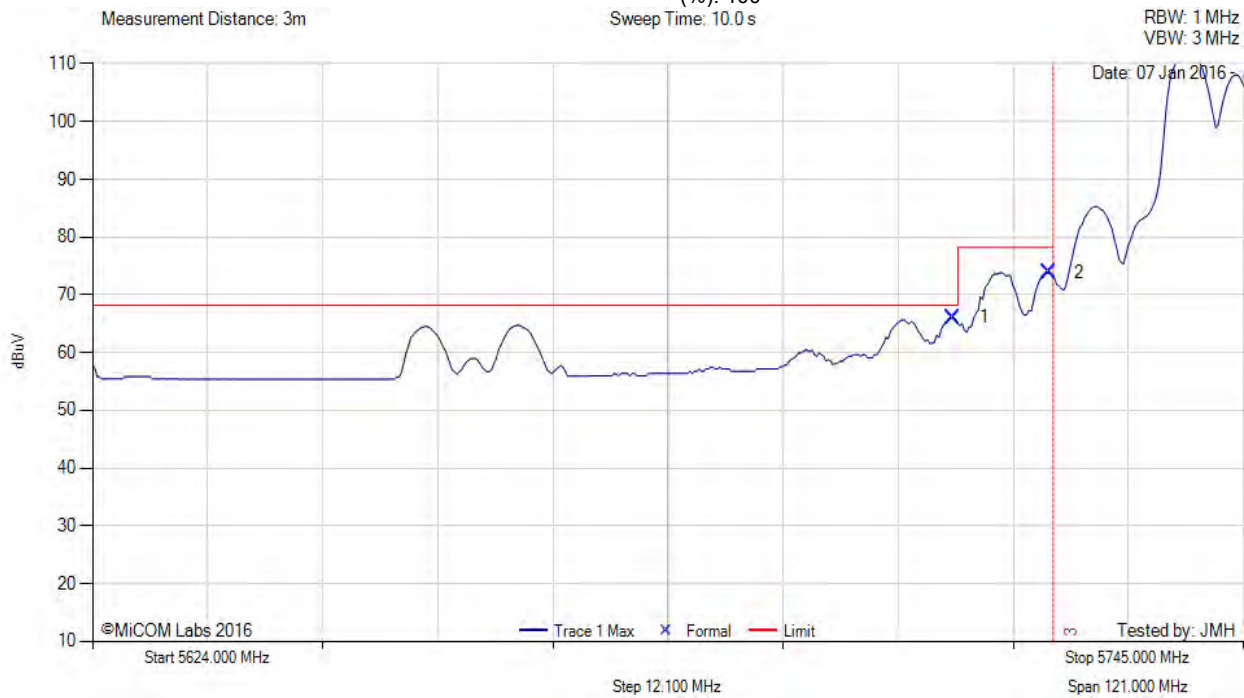

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5714.52	27.94	3.81	34.34	66.09	Marker	Horizontal	163	86	68.2	-2.1	Pass
2	5724.52	35.74	3.79	34.35	73.88	Marker	Horizontal	163	86	78.2	-4.4	Pass
3	5725.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 398 of 405

5725 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11ac-80, Test Freq: 5775.00 MHz, Antenna: Aruba Networks Metal Sheet, Power Setting: 20, Duty Cycle (%): 100

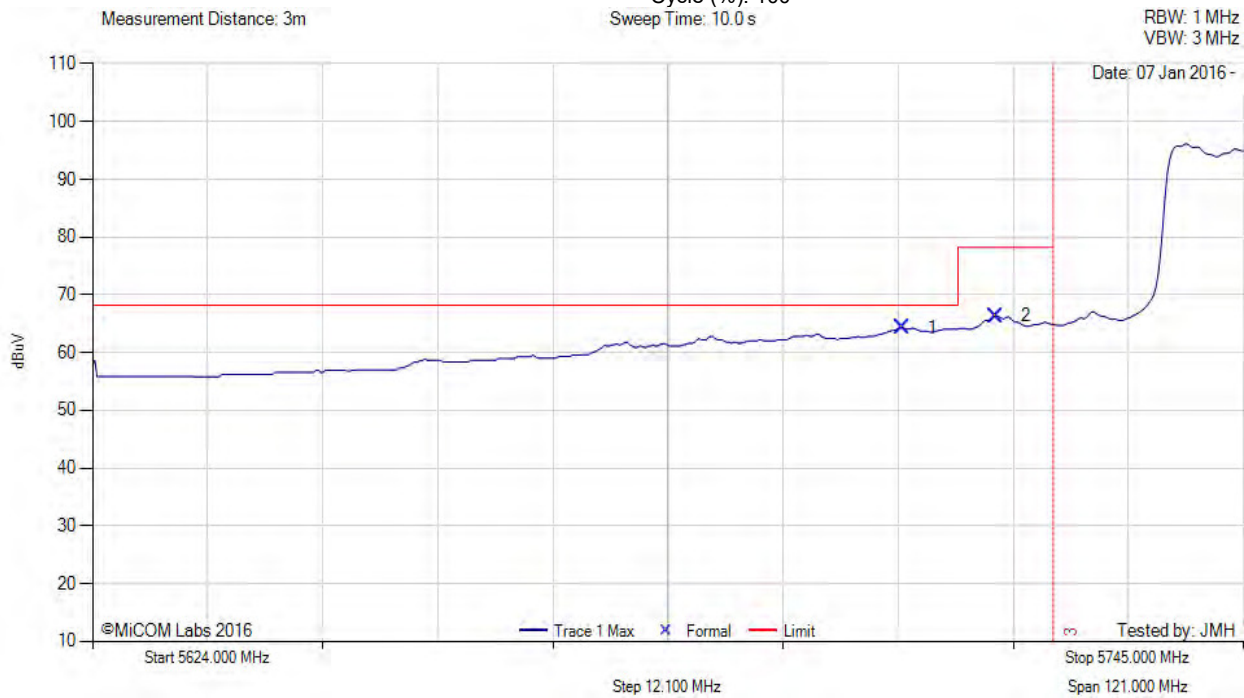

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5709.18	26.19	3.84	34.34	64.37	Marker	Horizontal	163	86	68.2	-3.9	Pass
2	5718.94	28.21	3.80	34.34	66.35	Marker	Horizontal	163	86	78.2	-11.9	Pass
3	5725.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 399 of 405

5725 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11n HT-20, Test Freq: 5745.00 MHz, Antenna: Aruba Networks Metal Sheet, Power Setting: 23, Duty Cycle (%): 100

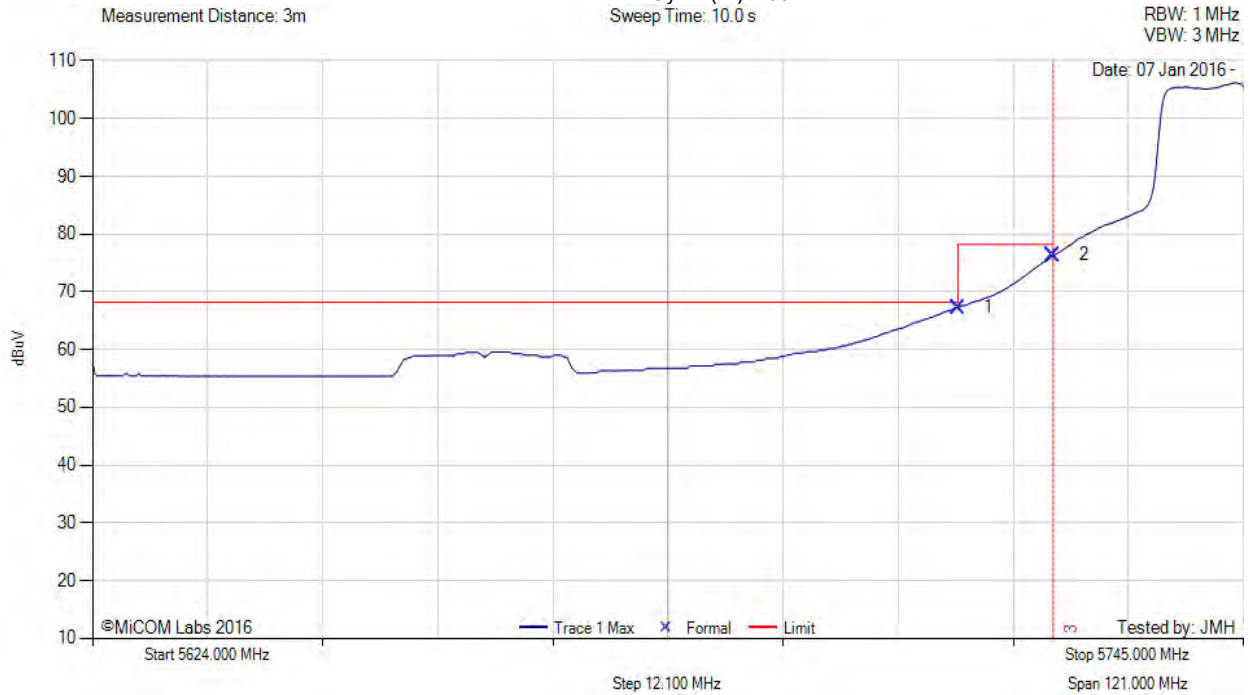

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5715.00	29.15	3.81	34.34	67.30	Marker	Horizontal	163	86	68.2	-0.9	Pass
2	5725.00	38.22	3.79	34.35	76.36	Marker	Horizontal	163	86	78.2	-1.9	Pass
3	5725.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 400 of 405

5725 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11n HT-40, Test Freq: 5755.00 MHz, Antenna: Aruba Networks Metal Sheet, Power Setting: 21, Duty Cycle (%): 100

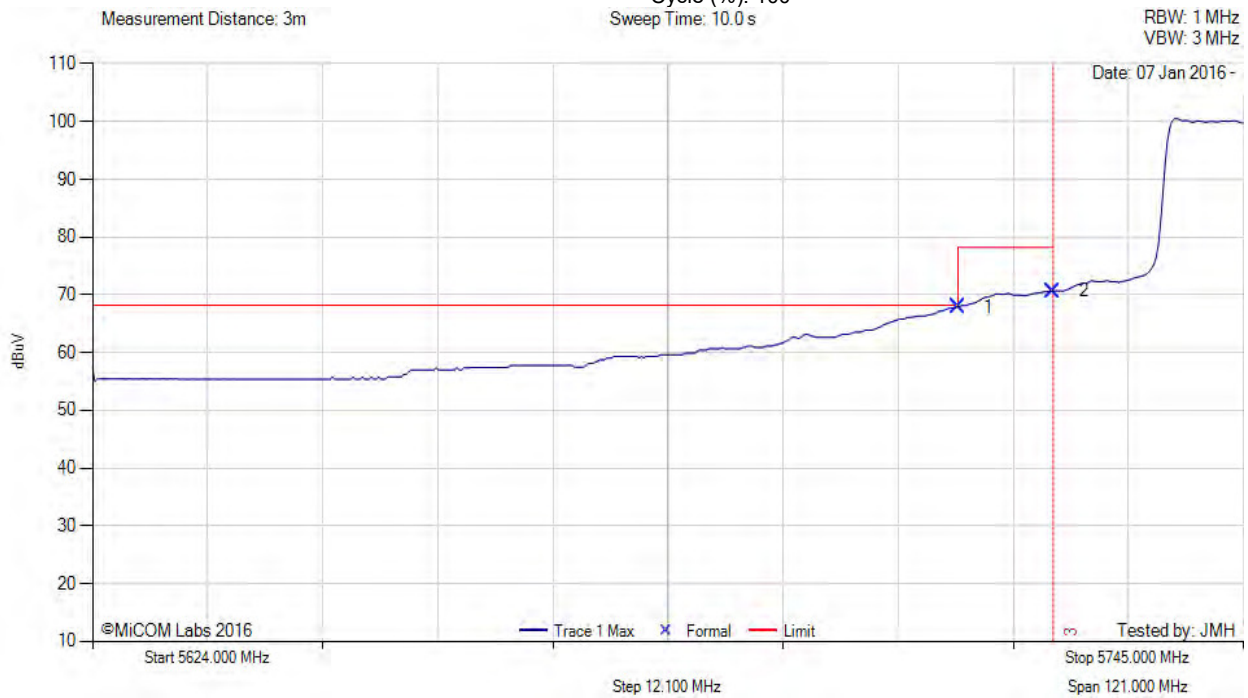

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5715.00	29.80	3.81	34.34	67.95	Marker	Horizontal	163	86	68.2	-0.3	Pass
2	5725.00	32.51	3.79	34.35	70.65	Marker	Horizontal	163	86	78.2	-7.6	Pass
3	5725.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 401 of 405

5850 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11a, Test Freq: 5825.00 MHz, Antenna: Aruba Networks Metal Sheet, Power Setting: 21, Duty Cycle (%): 100

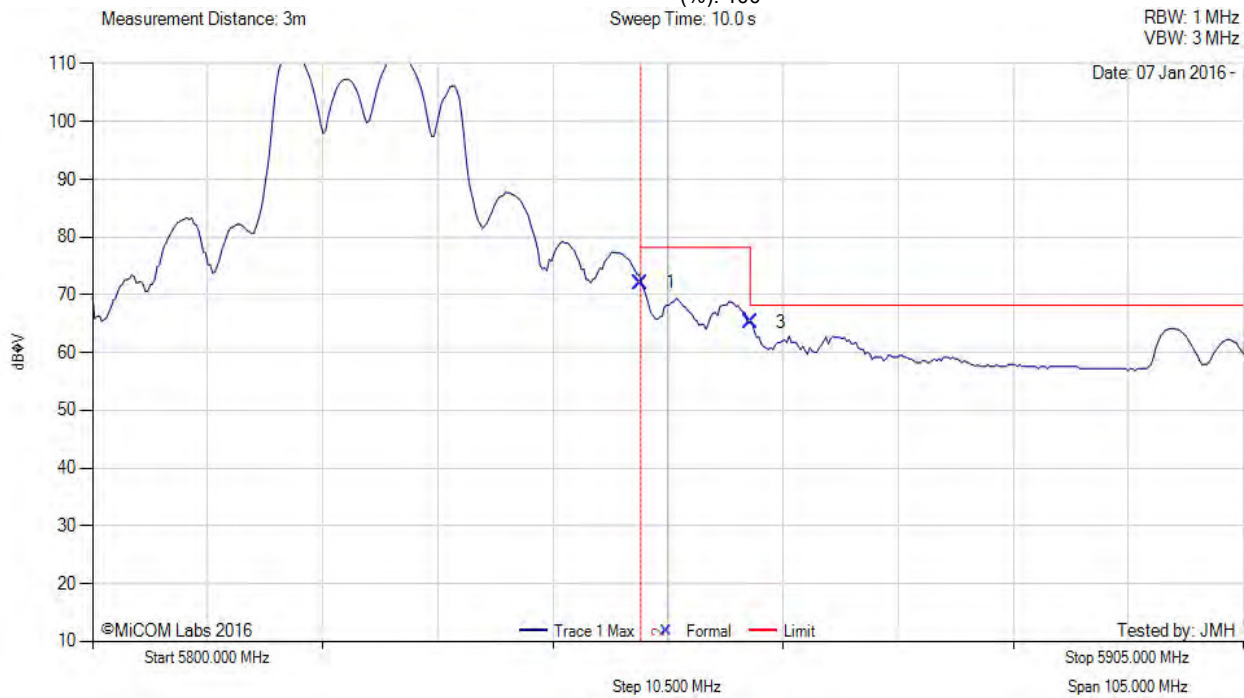

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5850.00	33.62	3.81	34.63	72.06	Marker	Horizontal	193	87	78.2	-6.2	Pass
2	5850.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	
3	5860.00	26.70	3.86	34.65	65.21	Marker	Horizontal	193	87	68.2	-3.0	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 402 of 405

5850 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11ac-80, Test Freq: 5775.00 MHz, Antenna: Aruba Networks Metal Sheet, Power Setting: 21, Duty Cycle (%): 100

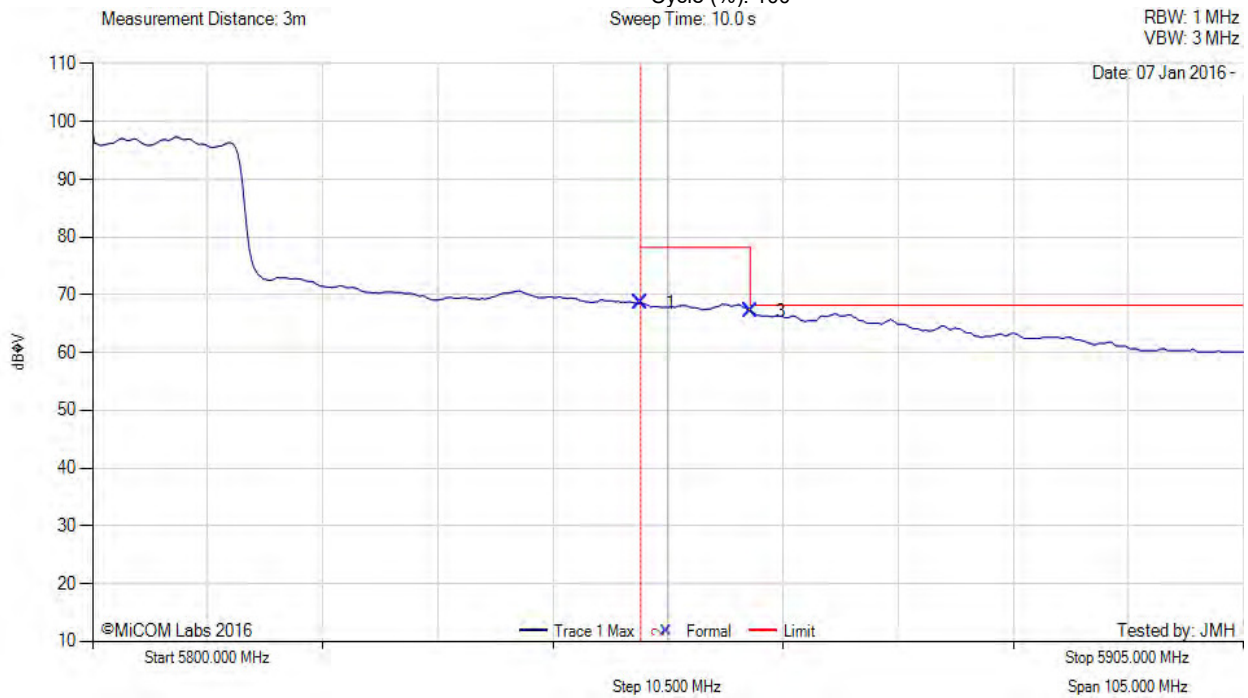

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5850.00	30.16	3.81	34.63	68.60	Marker	Horizontal	193	87	78.2	-9.6	Pass
2	5850.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	
3	5860.00	28.70	3.86	34.65	67.21	Marker	Horizontal	193	87	68.2	-1.0	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 403 of 405

5850 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11n HT-20, Test Freq: 5825.00 MHz, Antenna: Aruba Networks Metal Sheet, Power Setting: 23, Duty Cycle (%): 100

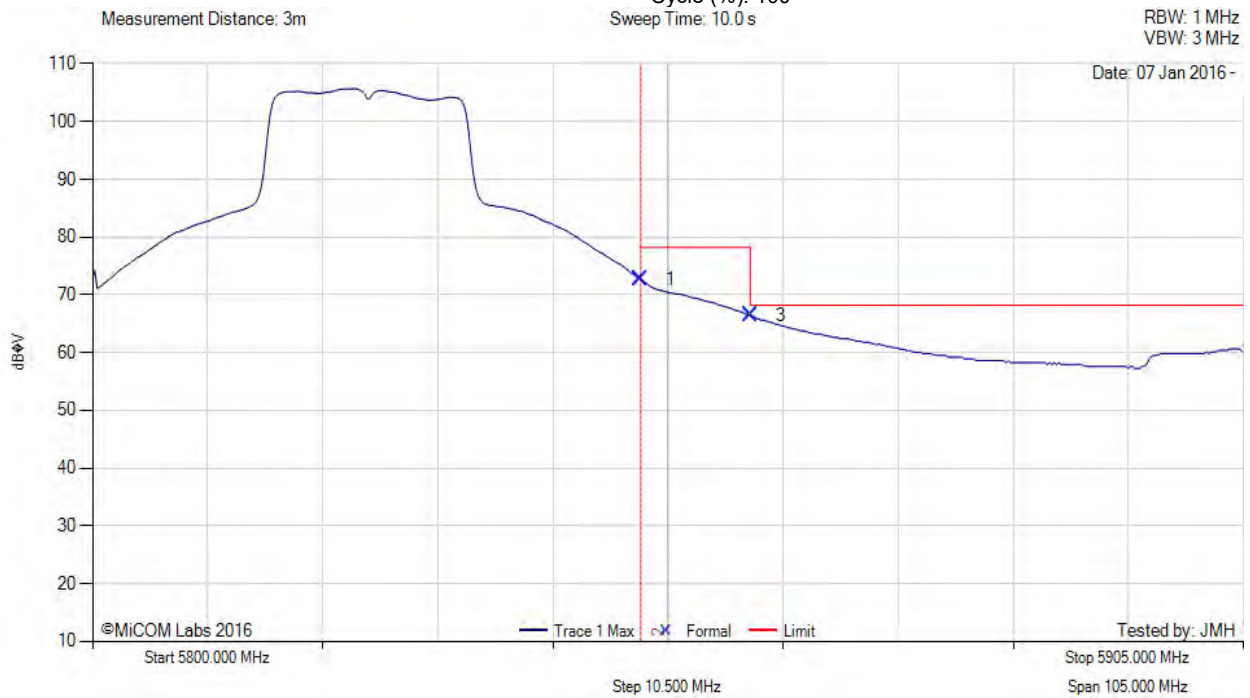

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5850.00	34.21	3.81	34.63	72.65	Marker	Horizontal	193	87	78.2	-5.6	Pass
2	5850.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	
3	5860.00	27.95	3.86	34.65	66.46	Marker	Horizontal	193	87	68.2	-1.8	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Aruba Networks APIN0224, APIN0225
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: ARUB206 – U19 Rev A
Issue Date: 30th April 2016
Page: 404 of 405

5850 MHz RADIATED BAND-EDGE EMISSIONS



Variant: 802.11n HT-40, Test Freq: 5795.00 MHz, Antenna: Aruba Networks Metal Sheet, Power Setting: 23, Duty Cycle (%): 100

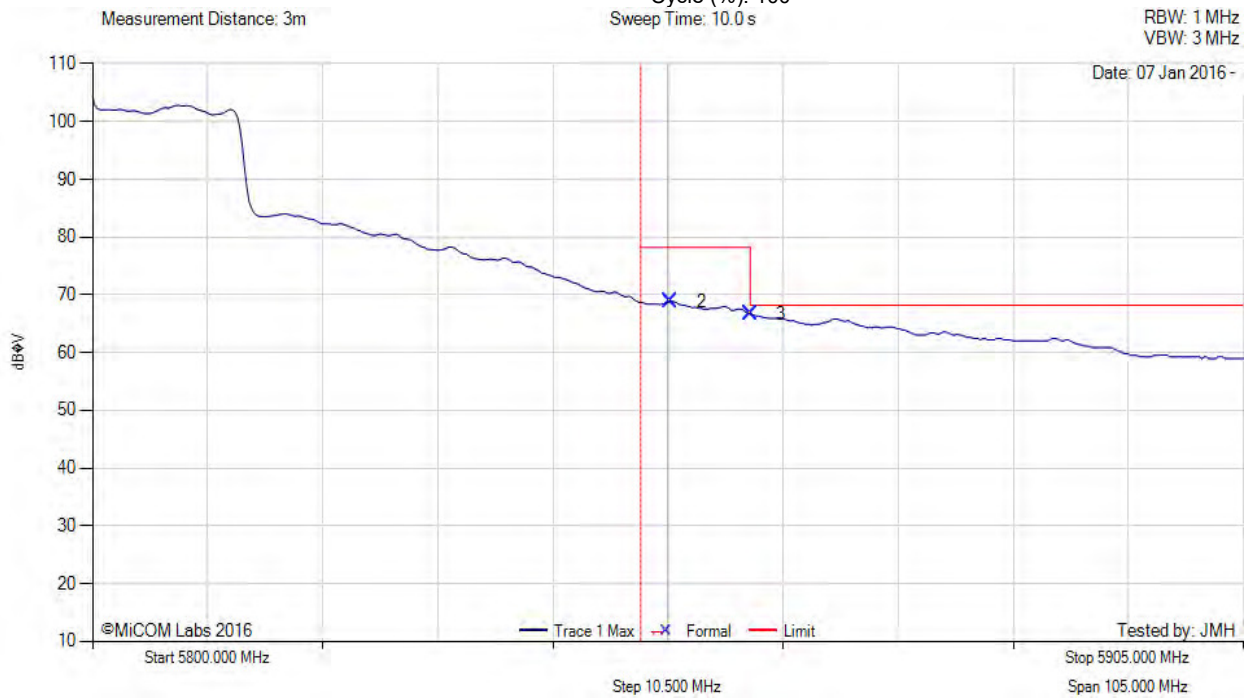

Num	Frequency MHz	Raw dBµV	Cable Loss	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5850.00	0.00	0.00	0.00	--	Frequency Line 1		0	0	--	--	
2	5852.74	30.46	3.82	34.63	68.91	Marker	Horizontal	193	87	78.2	-9.3	Pass
3	5860.00	28.21	3.86	34.65	66.72	Marker	Horizontal	193	87	68.2	-1.5	Pass

Test Notes: EUT on 150cm table, powered by PDSine 9001GR POE.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



575 Boulder Court
Pleasanton, California 94566, USA
Tel: +1 (925) 462 0304
Fax: +1 (925) 462 0306
www.micomlabs.com