

# Emissions Test Report

**EUT Name:** Wireless Access Point  
**Model No.:** APIN0324 and APIN0325  
CFR 47 Part 15.407 2014

*Prepared for:*

Robert Hastings  
Aruba Networks  
1344 Crossman Ave.  
Sunnyvale, CA 94089  
Tel: (408) 990- 2557

*Prepared by:*

TUV Rheinland of North America, Inc.  
1279 Quarry Lane  
Pleasanton, CA 94566  
Tel: (925) 249-9123  
Fax: (925) 249-9124  
<http://www.tuv.com/>

*Report/Issue Date:* June 16, 2015  
*Job #* 0000126487  
*Report Number:* 31560848.001



# Statement of Compliance

*Manufacturer:* Aruba Networks  
1344 Crossman Ave.  
Sunnyvale, CA 94089  
(408) 990- 2557

*Requester / Applicant:* Robert Hastings

*Name of Equipment:* Wireless Access Point  
*Model No.* APIN0324 and APIN0325  
*Type of Equipment:* Intentional Radiator  
*Application of Regulations:* CFR 47 Part 15.407 2014  
*Test Dates:* 22 Mar 2015 to 15 June 2015

## *Guidance Documents:*

Emissions: ANSI C63.10-2009 789033 D02 General UNII Test Procedures New Rules v01

## *Test Methods:*

Emissions: ANSI C63.10-2009 789033 D02 General UNII Test Procedures New Rules v01

The electromagnetic compatibility test and documented data described in this report has been performed and recorded by TUV Rheinland, in accordance with the standards and procedures listed herein. As the responsible authorized agent of the EMC laboratory, I hereby declare that the equipment described above has been shown to be compliant with the EMC requirements of the stated regulations and standards based on these results. If any special accessories and/or modifications were required for compliance, they are listed in the Executive Summary of this report.

This report must not be used to claim product endorsement by A2LA or any agency of the U.S. Government. This report contains data that are not covered by A2LA accreditation. This report shall not be reproduced except in full, without the written authorization of TUV Rheinland of North America.

Suresh Kondapalli

Test Engineer

Date June 16, 2015

A2LA Signatory

Date June 30, 2015



**Testing Cert #3331.02**



**US5254**



Industry  
Canada Industrie  
Canada

**2932M-1**

Table of Contents

<b>1</b>	<b>Executive Summary</b>	<b>7</b>
1.1	Scope	7
1.2	Purpose	7
1.3	Summary of Test Results	8
1.4	Special Accessories	8
1.5	Equipment Modifications	8
<b>2</b>	<b>Laboratory Information</b>	<b>9</b>
2.1	Accreditations & Endorsements	9
2.1.1	US Federal Communications Commission	9
2.1.2	NIST / A2LA	9
2.1.3	Canada – Industry Canada	9
2.1.4	Japan – VCCI	9
2.1.5	Acceptance by Mutual Recognition Arrangement	10
2.2	Test Facilities	10
2.2.1	Emission Test Facility	10
2.2.2	Immunity Test Facility	10
2.3	Measurement Uncertainty	11
2.3.1	Sample Calculation – radiated & conducted emissions	11
2.3.2	Measurement Uncertainty	11
2.3.1	Measurement Uncertainty Immunity	12
2.4	Calibration Traceability	12
<b>3</b>	<b>Product Information</b>	<b>13</b>
3.1	Product Description	13
3.2	Equipment Configuration	13
3.3	Operating Mode	13
3.4	Unique Antenna Connector	14
3.4.1	Results	14
<b>4</b>	<b>Emissions</b>	<b>15</b>
4.1	Output Power Requirements	15
4.1.1	Test Method	15
4.1.2	Results	16
4.2	Occupied Bandwidth	30
4.2.1	Test Method	30
4.2.2	Results	31
4.3	Peak Power Spectral Density	40
4.3.1	Test Method	40
4.3.2	Results	41
	<b>Transmitter Spurious Emissions</b>	<b>54</b>
4.3.3	Test Methodology	54
4.3.4	Transmitter Spurious Emission Limit	55

## Table of Contents

4.3.5	Test Results	55
4.3.6	Sample Calculation	92
<b>4.4</b>	<b>AC Conducted Emissions</b>	<b>93</b>
4.4.1	Test Methodology	93
4.4.2	Test Results	93
<b>4.5</b>	<b>Frequency Stability</b>	<b>98</b>
4.5.1	Test Methodology	98
4.5.2	Manufacturer Declaration	98
4.5.3	Limit	99
4.5.4	Test results:	99
<b>4.6</b>	<b>Voltage Variation</b>	<b>101</b>
4.6.1	Test Methodology	101
4.6.2	Test results	101
<b>4.7</b>	<b>Maximum Permissible Exposure</b>	<b>102</b>
4.7.1	Test Methodology	102
4.7.2	RF Exposure Limit	102
4.7.3	EUT Operating Condition	103
4.7.4	Classification	103
4.7.5	Test Results	103
4.7.6	Sample Calculation	103
<b>5</b>	<b>Test Equipment List</b>	<b>104</b>
<b>5.1</b>	<b>Equipment List</b>	<b>104</b>
<b>6</b>	<b>EMC Test Plan</b>	<b>105</b>
<b>6.1</b>	<b>Introduction</b>	<b>105</b>
<b>6.2</b>	<b>Customer</b>	<b>105</b>
<b>6.3</b>	<b>Equipment Under Test (EUT)</b>	<b>106</b>
<b>6.4</b>	<b>Test Specifications</b>	<b>113</b>

Index of Tables

<b>Table 1:</b> Summary of Test Results .....	8
<b>Table 2:</b> RF Output Power at the Antenna Port – Test Results .....	16
<b>Table 3:</b> Output Power at the Antenna Port – .....	17
<b>Table 4:</b> Occupied Bandwidth – Test Results .....	31
<b>Table 5:</b> Peak Power Spectral Density – Test Results .....	41
<b>Table 6:</b> Transmit Spurious Emission at Band-Edge Requirements .....	56
<b>Table 7:</b> AC Conducted Emissions – Test Results .....	94
<b>Table 8:</b> Customer Information .....	105
<b>Table 9:</b> Technical Contact Information .....	105
<b>Table 10:</b> EUT Specifications .....	106
<b>Table 11:</b> EUT Channel Power Specifications .....	108
<b>Table 12:</b> Interface Specifications .....	109
<b>Table 13:</b> Supported Equipment .....	109
<b>Table 14:</b> Description of Sample used for Testing .....	109
<b>Table 15:</b> Description of Test Configuration used for Radiated Measurement. ....	110
<b>Table 16:</b> Final Test Mode for 5725 – 5850MHz .....	111
<b>Table 17:</b> Test Specifications .....	113

# 1 Executive Summary

## 1.1 Scope

This report is intended to document the status of conformance with the requirements of the CFR 47 Part 15.407 2014 based on the results of testing performed on 22 Mar 2015 to 15 June 2015 on the Wireless Access Point Model APIN0324 and APIN0325 manufactured by Aruba Networks. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

## 1.2 Purpose

Testing was performed to evaluate the EMC performance of the EUT in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report. The 5725 MHz to 5850 MHz frequency band is covered in this document.

### 1.3 Summary of Test Results

**Table 1:** Summary of Test Results

Test	Test Method ANSI C63.4	Test Parameters (Measured)	Result
Spurious Emission in Transmitted Mode	CFR47 15.209, CFR47 15.407 (b)	Limit: Class B	Complied
Restricted Bands of Operation	CFR47 15.205,	Class B, see plots	Complied
AC Power Conducted Emission	CFR47 15.207	Class B, see plots	Complied
Occupied Bandwidth (MHz)	CFR47 15.407 (a)	11a: 16.38 (6dB) 16.54(99%) HT20: 17.44(6dB) 17.66(99%) HT40: 35.66(6dB) 36.07(99%) VHT80: 76.00(6dB) 75.63(99%)	Complied
Maximum Output Power (dBm)	CFR47 15.407 (a)	22.55dBm (Max combined power 4x4)	Complied
Peak Power Spectral Density (dBm)	CFR47 15.407 (a)	Limit 24dBm with 12dBi Antenna Measured 8.58dBm	Complied
Conducted Emission – Antenna Port	CFR47 15.407 (b),	30 MHz -40 GHz < 27 dBm/MHz see plots	Complied
Frequency Stability	CFR47 15.407 (g)	Limit ±20 ppm Measured: 10.89ppm	Complied
RF Exposure	CFR47 15.247 (i), 2.1091	General Population	Complied

Note: This test report covers 5725 MHz to 5850MHz band.

### 1.4 Special Accessories

No special accessories were necessary in order to achieve compliance.

### 1.5 Equipment Modifications

None



## 2 Laboratory Information

### 2.1 Accreditations & Endorsements

#### 2.1.1 US Federal Communications Commission



TUV Rheinland of North America at 1279 Quarry Ln, Pleasanton, CA 94566 is recognized by the commission for performing testing services for the general public on a fee basis. These laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (US5254). The laboratory scope of accreditation includes: Title 47 CFR Parts 15, 18, and 90. The accreditation is updated every 3 years.

#### 2.1.2 NIST / A2LA



TUV Rheinland of North America is accredited by the National Voluntary Laboratory Accreditation Program, which is administered under the auspices of the National Institute of Standards and Technology. The laboratory has been assessed and accredited in accordance with ISO Guide 17025:1999 and ISO 9002 (Lab Code Testing Cert #3331.02). The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

#### 2.1.3 Canada – Industry Canada



TUV Rheinland of North America at the 1279 Quarry Ln, Pleasanton, CA 94566 address is accredited by Industry Canada for performing testing services for the general public on a fee basis. This laboratory test facilities have been fully described in reports submitted to and accepted by Industry Canada (File Number 2932M). This reference number is the indication to the Industry Canada Certification Officers that the site meets the requirements of RSS 212, Issue 1 (Provisional). The accreditation is updated every 3 years.

#### 2.1.4 Japan – VCCI



The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) is a group that consists of Information Technology Equipment (ITE) manufacturers and EMC test laboratories. The purpose of the Council is to take voluntary control measures against electromagnetic interference from Information Technology Equipment, and thereby contribute to the development of a socially beneficial and responsible state of affairs in the realm of Information Technology Equipment in Japan. TUV Rheinland of North America at 1279 Quarry Ln, Pleasanton, CA 94566 has been assessed and approved in accordance with the Regulations for Voluntary Control Measures.

VCCI Registration No. for Pleasanton: A-0031

VCCI Registration No. for Santa Clara: A-0032

## 2.1.5 Acceptance by Mutual Recognition Arrangement



The United States has an established agreement with specific countries under the Asia Pacific Laboratory Accreditation Corporation (APLAC) Mutual Recognition Arrangement. Under this agreement, all TUV Rheinland at 1279 Quarry Ln, Pleasanton, CA 94566 test results and test reports within the scope of the laboratory NIST / A2LA accreditation will be accepted by each member

country.

## 2.2 Test Facilities

All of the test facilities are located at 1279 Quarry Lane, Pleasanton, California 94566, USA. The 2305 Mission College, Santa Clara, 95054, USA location is considered a Pleasanton annex.

### 2.2.1 Emission Test Facility

The Semi-Anechoic chamber and AC Line Conducted measurement facility used to collect the radiated and conducted data has been constructed in accordance with ANSI C63.7:1992. The site has been measured in accordance with and verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4-2009, at a test distance of 3 and 5 meters. The site is listed with the FCC and accredited by A2LA (Lab Code Testing Cert #3331.02). The 3/5-meter semi-anechoic chamber used to collect the radiated data has been verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4-2009, at a test distance of 3 meter and 5 meters. A report detailing this site can be obtained from TUV Rheinland of North America.

### 2.2.2 Immunity Test Facility

ESD, EFT, Surge, PQF: These tests are performed in an environmentally controlled room with a 3.7 m x 4.8 m x 3.175 mm thick aluminum floor connected to PE ground.

For ESD testing, tabletop equipment is placed on an insulated mat with a surface resistivity of  $10^9$  Ohms/square on a 1.6 m x 0.8 m x 0.8 m high non-conductive table with a 3.175 mm aluminum top (Horizontal Coupling Plane). The HCP is connected to the main ground plane via a low impedance ground strap through two 470-k $\Omega$  resistors. The Vertical Coupling Plane consists of an aluminum plate 50 cm x 50 cm x 3.175 mm thick. The VCP is connected to the main ground plane via a low impedance ground strap through two 470-k $\Omega$  resistors.

For EFT, Surge, PQF, the HCP and VCP are removed.

RF Field Immunity testing is performed in a 7.3m x 4.3m x 4.1m anechoic chamber.

RF Conducted and Magnetic Field Immunity testing is performed on a 4.8m x 3.7m x 3.175mm thick aluminum ground plane.

All test areas allow a minimum distance of 1 meter from the EUT to walls or conducting objects.

## 2.3 Measurement Uncertainty

Two types of measurement uncertainty are expressed in this report, per *ISO Guide To The Expression Of Uncertainty In Measurement*, 1<sup>st</sup> Edition, 1995.

*The Combined Standard Uncertainty* is the standard uncertainty of the result of a measurement when that result is obtained from the values of a number of other quantities; it is equal to the positive square root of the sum of the variances or co-variances of these other quantities, weighted according to how the measurement result varies with changes in these quantities. The term *standard uncertainty* is the result of a measurement expressed as a standard deviation.

### 2.3.1 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{RAW} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: RAW = Measured level before correction (dB $\mu$ V)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V/m}}{20}}$$

#### Sample radiated emissions calculation @ 30 MHz

Measurement +Antenna Factor–Amplifier Gain+Cable loss=Radiated Emissions (dBuV/m)

$$25 \text{ dBuV/m} + 17.5 \text{ dB} - 20 \text{ dB} + 1.0 \text{ dB} = 23.5 \text{ dBuV/m}$$

### 2.3.2 Measurement Uncertainty

Per CISPR 16-4-2	U <sub>lab</sub>	U <sub>cispr</sub>
<b>Radiated Disturbance @ 10 meters</b>		
30 – 1,000 MHz	2.25 dB	4.51 dB
<b>Radiated Disturbance @ 3 meters</b>		
30 – 1,000 MHz	2.26 dB	4.52 dB
1 – 6 GHz	2.12 dB	4.25 dB
6 – 18 GHz	2.47 dB	4.93 dB
<b>Conducted Disturbance @ Mains Terminals</b>		

150 kHz – 30 MHz	1.09 dB	2.18 dB
<b>Disturbance Power</b>		
30 MHz – 300 MHz	3.92 dB	4.3 dB

### Voltech PM6000A

The estimated combined standard uncertainty for harmonic current and flicker measurements is $\pm 5.0\%$ .	Per CISPR 16-4-2 Methods
--	--------------------------

### 2.3.1 Measurement Uncertainty Immunity

The estimated combined standard uncertainty for ESD immunity measurements is $\pm 8.2\%$ .	Per IEC 61000-4-2
The estimated combined standard uncertainty for radiated immunity measurements is $\pm 4.10$ dB.	Per IEC 61000-4-3
The estimated combined standard uncertainty for conducted immunity measurements with CDN is $\pm 3.66$ dB	Per IEC 61000-4-6
The estimated combined standard uncertainty for power frequency magnetic field immunity is $\pm 2.9\%$ .	Per IEC 61000-4-8

### Thermo KeyTek EMC Pro

The estimated combined standard uncertainty for EFT fast transient immunity measurements is $\pm 2.6\%$ .
The estimated combined standard uncertainty for surge immunity measurements is $\pm 2.6\%$ .
The estimated combined standard uncertainty for voltage variation and interruption measurements is $\pm 1.74\%$ .

The expanded uncertainty at a level of 95% confidence is obtained by multiplying the combined standard uncertainty by a coverage factor of 2. Compliance criteria are not based on measurement uncertainty.

## 2.4 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Standard 17025:2005. Equipment calibration records are kept on file at the test facility.

---

## 3 Product Information

### 3.1 Product Description

The Aruba AP-320 Series wireless access points support IEEE 802.11ac standard for high-performance WLAN, and is equipped with two dual-band radios, which can provide access and monitor the network simultaneously. Multi-user Multiple-in, Multiple-output (MU-MIMO) technology allows this access point to deliver high-performance 802.11n 2.4 GHz and 802.11ac 5 GHz functionality, while also supporting 802.11a/b/g/n/ac wireless services.

### 3.2 Equipment Configuration

A description of the equipment configuration is given in the Test Plan Section. The EUT was tested as called for in the test standard and was configured and operated in a manner consistent with its intended use. The EUT was connected to rated power and allowed to reach intended operating conditions. The placement of the EUT system components was guided by the test standard and selected to represent typical installation conditions.

In the case of an EUT that can operate in more than one configuration, preliminary testing was performed to determine the configuration that produced maximum radiation.

The final configuration was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

### 3.3 Operating Mode

A description of the operation mode is given in the Test Plan Section. In the case of an EUT that can operate in more than one state, preliminary testing was performed to determine the operating mode that produced maximum radiation.

The final operating mode was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

---

### **3.4 Unique Antenna Connector**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited..

#### **3.4.1 Results**

The Wireless Access Point Model APIN0325 has 4 internal fixed antennas. Model: APIN0324 has four ports with reverse polarity SMA connector. List of antennas that can be used with this device is in Section 6.3.

## 4 Emissions

Testing was performed in accordance with CFR 47 Part 15.407: 2014. These test methods are listed under the laboratory's A2LA Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices. Procedures described in section 8 of the standard were used.

### 4.1 Output Power Requirements

*The maximum output power requirement is the maximum equivalent isotropic radiated power delivering at the transmitting antenna under specified conditions of measurements in the presence of modulation.*

*The maximum output power and harmonics shall not exceed CFR47 Part 15.407 (a):2014*


*The maximum transmitted powers are*

*Band 5725-5850 MHz: 1 W*

#### 4.1.1 Test Method

The ANSI C63.10-2009 Section 6.10.3.1 conducted method was used to measure the channel power output. The preliminary investigation was performed at different data rate/ chain to determine the highest power output for each mode. The worst findings were conducted on 3 channels in each operating range per CFR47 Part 15.407(a): 2014; 5725 MHz to 5850MHz. The worst mode results indicated below.

Test Setup:

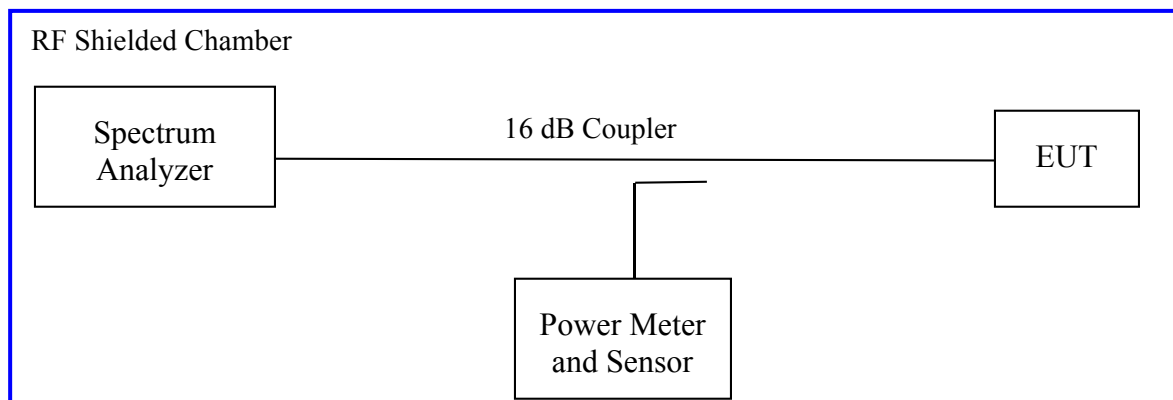

*Method SA-1 of "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices" applies since the EUT continuously transmit; where duty cycle is greater than 98%. Sample detector was used.*

Each chain was measured individually and applied the measure-and-sum approach per KDB66291.

## 4.1.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

**Table 2: RF Output Power at the Antenna Port – Test Results**

<b>Test Conditions:</b> Conducted Measurement, Normal Temperature								
<b>Antenna Type:</b> Integrated & External					<b>Power Setting:</b> See test plan			
<b>Min -Max. Directional Gain:</b> +2dBi & +12 dBi					<b>Signal State:</b> Modulated at 100%.			
<b>Ambient Temp.:</b> 23° C					<b>Relative Humidity:</b> 33%			
<b>802.11a Mode, 4x4</b>								
Operating Channel	Limit [dBm]	Ch0 [dBm]	Ch1 [dBm]	Ch2 [dBm]	Ch3 [dBm]	CF [dB]	Total Power [dBm]	Margin [dB]
5745	27.50	17.44	16.25	15.61	16.43	0.04	22.55	-4.95
5785	27.50	15.99	14.26	14.71	14.81	0.04	21.06	-6.44
5825	27.50	16.96	16.04	14.30	14.20	0.04	21.60	-5.90
<p><b>Note:</b> 1. The highest output power was observed at 802.11a mode 6.0mbps, 4 Data Streams. <b>Power setting 17</b> was used above measurements</p> <p>2. All chains will be on at all time. RF output powers were summed in accordance with ANSI C63.10; 2009 per KDB 662911.</p> <p>3. The highest gain of antennas used 8.5dBi. As Per CFR47 Part 15.407 (a) the limit is reduced for every 1 dB gain exceeding 6dBi, limit will be 27.5dBm. No beamforming is considered for this mode. List of antennas is given Section 6.3 of this report.</p> <p><b>Note:</b> Highlighted plots are available in this report</p>								



**Table 3:** Output Power at the Antenna Port –

<b>Test Conditions:</b> Conducted Measurement, Normal Temperature								
<b>Antenna Type:</b> Integrated & External					<b>Power Setting:</b> See test plan			
<b>Min-Max. Directional Gain:</b> +2dBi & +12 dBi					<b>Signal State:</b> Modulated at 100%.			
<b>Ambient Temp.:</b> 23 °C					<b>Relative Humidity:</b> 33%			
<b>802.11n (HT20/ VHT20) Mode, 4x4;</b>								
Operating Channel	Limit [dBm]	Ch0 [dBm]	Ch1 [dBm]	Ch2 [dBm]	Ch3 [dBm]	CF [dB]	Total Power [dBm]	Margin [dB]
5745	24.00	14.27	16.02	15.18	15.00	0.34	21.53	-2.47
5785	24.00	16.52	15.51	15.02	14.12	0.34	21.74	-2.26
5825	24.00	14.57	14.11	13.78	13.47	0.34	20.37	-3.63
<p><b>Note:</b> 1. The highest output power was observed at HT20 6.5 Mbps, 4 Data Streams.                  2. <b>The above measurement are taken with PS17.</b> All chains will be on at all time and beam performing. RF output powers were summed in accordance with ANSI C63.10; 2009 per KDB 662911                  3. The total directional gain for APIN0325 Unit with internal Antennas would be 9.0dBi; with Antenna gain: 5.5 dBi and directional gain 3.5dBi As Per CFR47 Part 15.407 (a) the limit is reduced for every 1 dB gain exceeding 6dBi, limit will be 27.0dBm                  5. For APIN0324unit with External antennas minimum and maximum gains beam forming turned OFF are 2dBi and 8.5dBi, and with Beam forming ON are 8.5dBi and 12dBi. The limit will be 24.00dBm with 12dBi with max antenna gain.                  6. <b>The power limit above is with highest gain antenna with beamforming on.</b> <b>Power setting 17</b> was used above measurements. List of antennas is given Section 6.3 of this report.</p>								
<b>Note:</b> Highlighted plots are available in this report								

802.11n (HT40/VHT40) Mode, 4x4								
Operating Channel	Limit [dBm]	Ch0 [dBm]	Ch1 [dBm]	Ch2 [dBm]	Ch3 [dBm]	CF [dB]	Total Power [dBm]	Margin [dB]
5755	24.00	16.43	15.43	14.34	14.69	0.46	21.78	-2.22
5795	24.00	15.92	15.90	16.91	16.56	0.46	22.83	-1.17

**Note:** 1. The highest output power was observed at HT20 6.5 Mbps, 4 Data Streams.  
 2. All chains will be on at all time and beam performing. RF output powers were summed in accordance with ANSI C63.10; 2009 per KDB 662911  
 3. The total directional gain for 0325 Unit with internal Antennas would be 9.0dBi; Antenna gain: 5.5 dBi and directional gain 3.5dBi  
 4. As Per CFR47 Part 15.407 (a), the limit is reduced for every 1 dB gain exceeding 6dBi. The limit would be 27.0dBm. Beam forming turned off the limit will be 30dBm  
 5. For 0324 unit with External antennas minimum and maximum gains beam forming turned OFF are 2dBi and 8.5dBi, and with Beam forming ON are 8dBi and 12dBi. The limit will be 24.00dBm with 12dBi with max antenna gain.  
 6. **Power setting 16** was used for above measurements. List of antennas is given Section 6.3 of this report.

**Note:** Highlighted plots are available in this report

802.11AC (VHT80) Mode, 4x4								
Operating Channel	Limit [dBm]	Ch0 [dBm]	Ch1 [dBm]	Ch2 [dBm]	Ch3 [dBm]	CF [dB]	Total Power [dBm]	Margin [dB]
5775	24.00	14.77	14.64	15.30	14.10	1.22	21.96	-2.04

**Note:** 1. The highest output power was observed at HT80 Mbps, 4 Data Streams. Plots for all the measurements stated above were taken, to reduce complexity and bulkiness of the report. Only **Highlighted** Plots are placed in the report.  
 2. All chains will be on at all time and beam performing. RF output powers were summed in accordance with ANSI C63.10; 2009 per KDB 662911  
 3. The total directional gain for 0325 Unit with internal Antennas would be 9.0dBi; Antenna gain: 5.5 dBi and directional gain 3.5dBi  
 4. As Per CFR47 Part 15.407 (a), the limit is reduced for every 1 dB gain exceeding 6dBi. The limit would be 27.0dBm. Beam forming turned off the limit will be 30dBm  
 5. For 0324 unit with External antennas minimum and maximum gains beam forming turned OFF are 2dBi and 8.5dBi, and with Beam forming ON are 8dBi and 12dBi. The limit will be 24.00dBm with 12dBi with max antenna gain.  
 6. **Power setting 16** was used for above measurements. List of antennas is given Section 6.3 of this report.

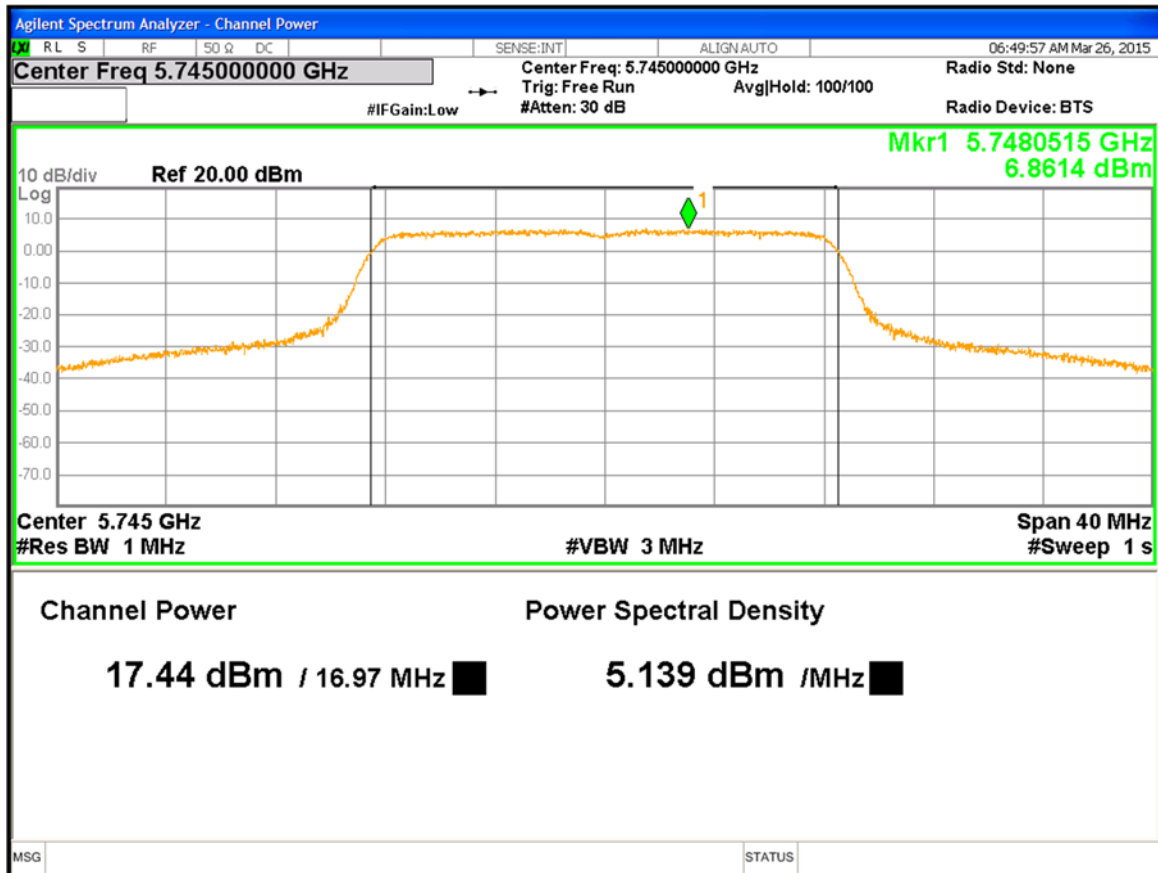


Figure 1: Maximum Transmitted Power, 5725 MHz at 11a, Chain 0

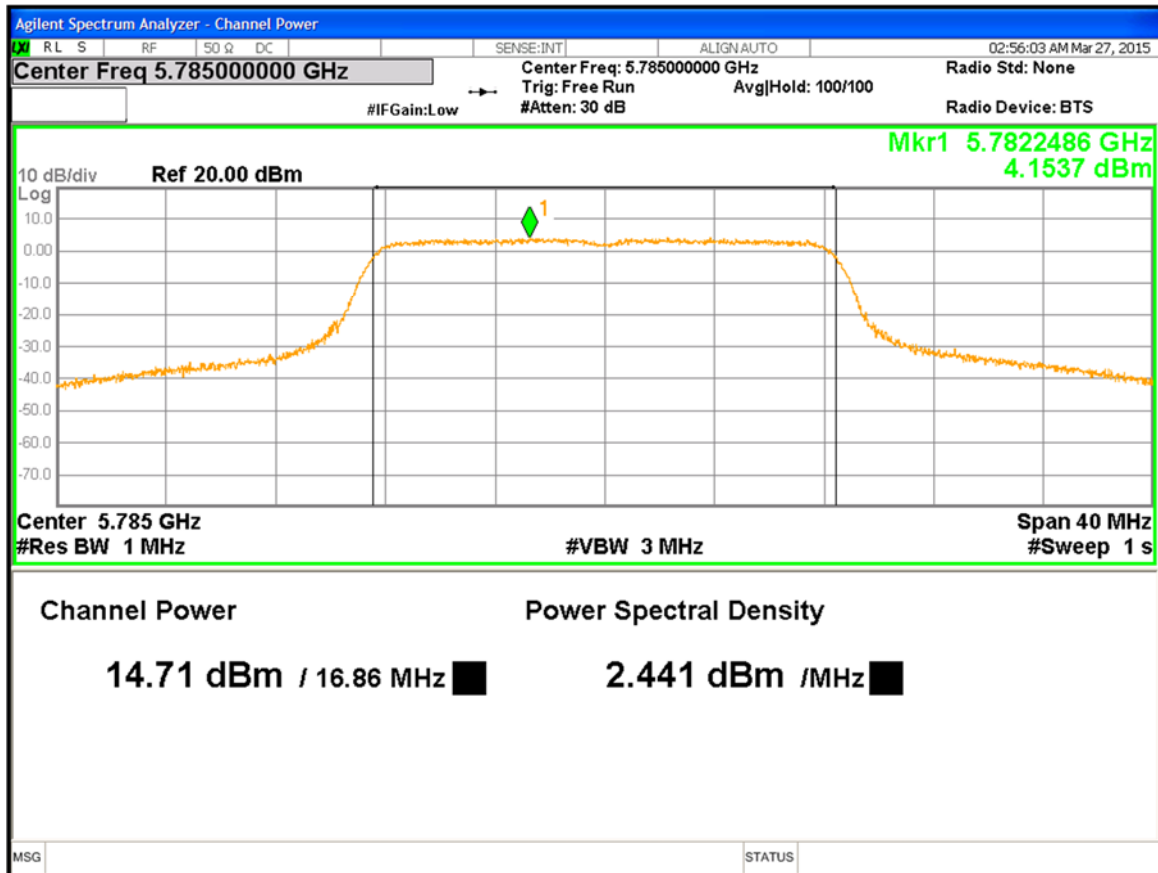


Figure 2: Maximum Transmitted Power, 5785 MHz at 11a, Chain 2

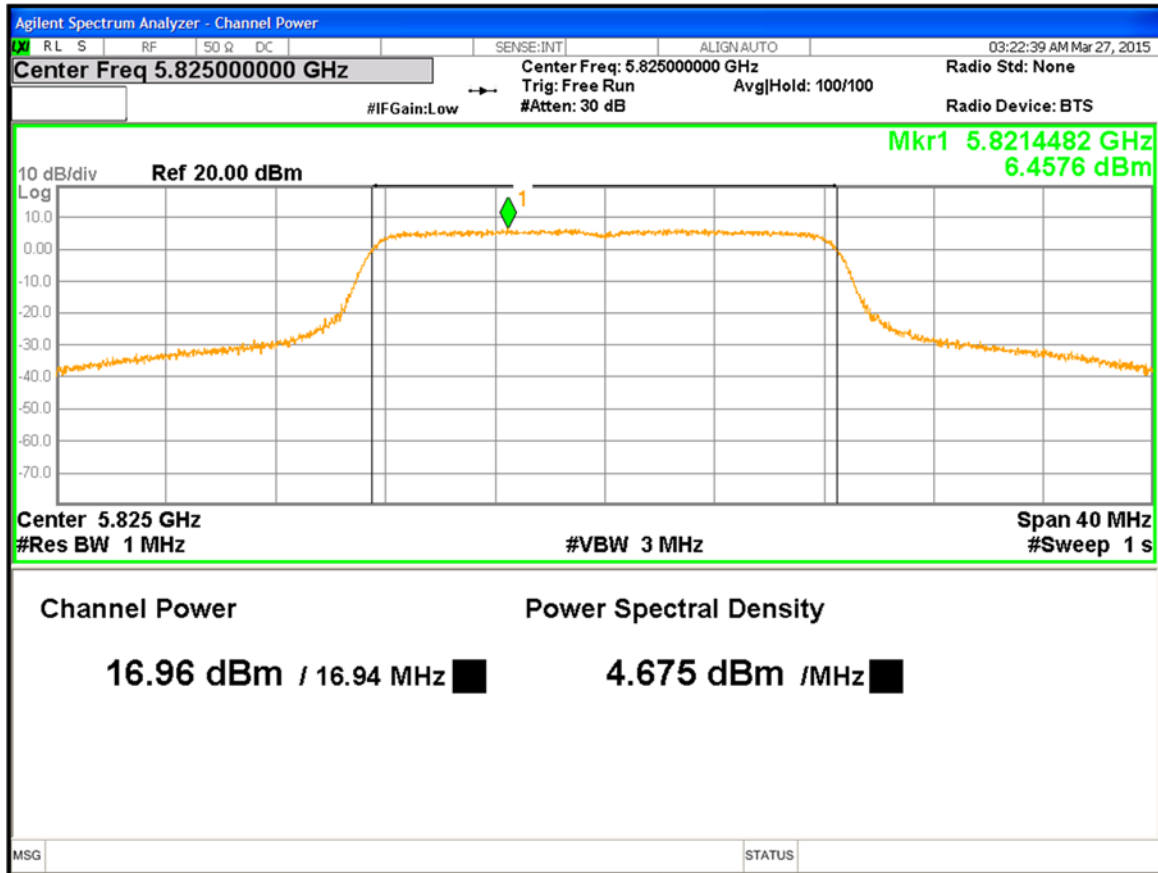


Figure 3: Maximum Transmitted Power, 5825MHz at 11a, Chain 0

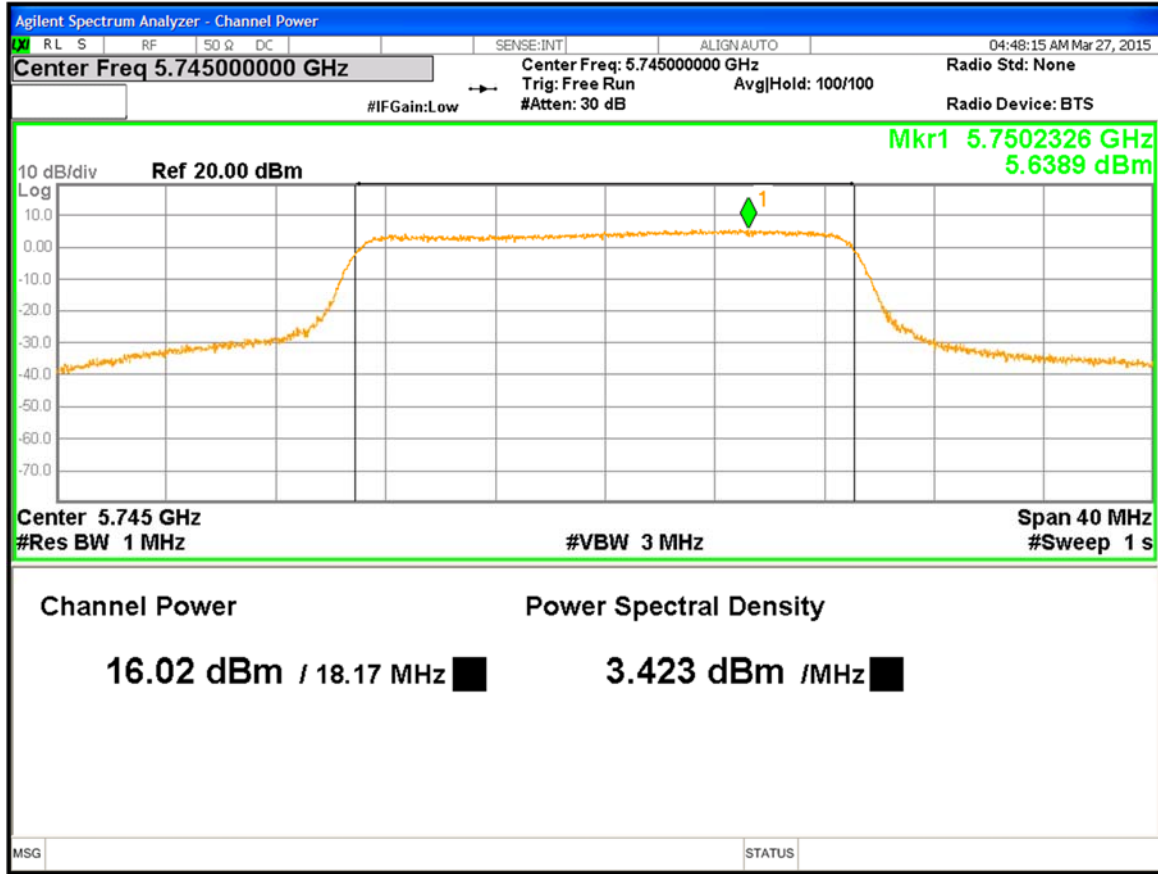


Figure 4: Maximum Transmitted Power, at 5745MHz HT20, Chain 1

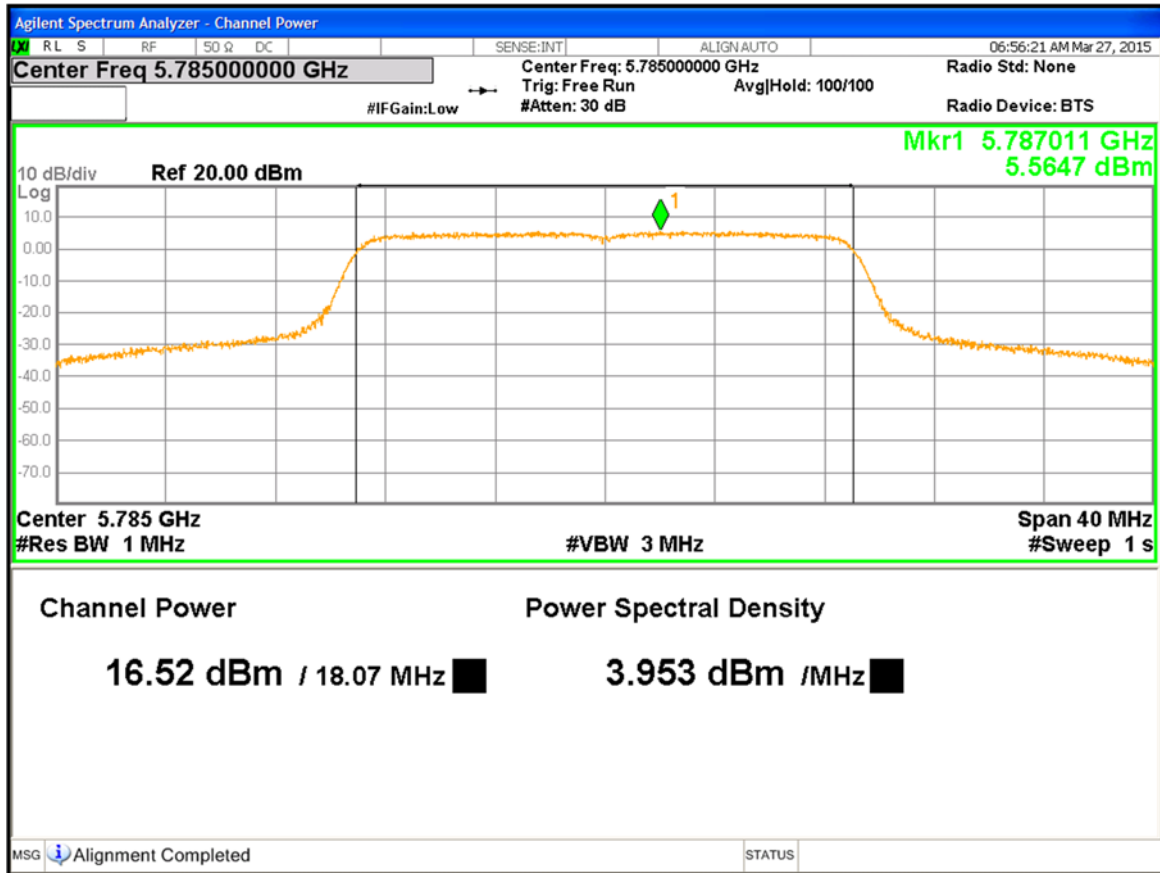


Figure 5: Maximum Transmitted Power, at 5785MHz HT20, Chain 0

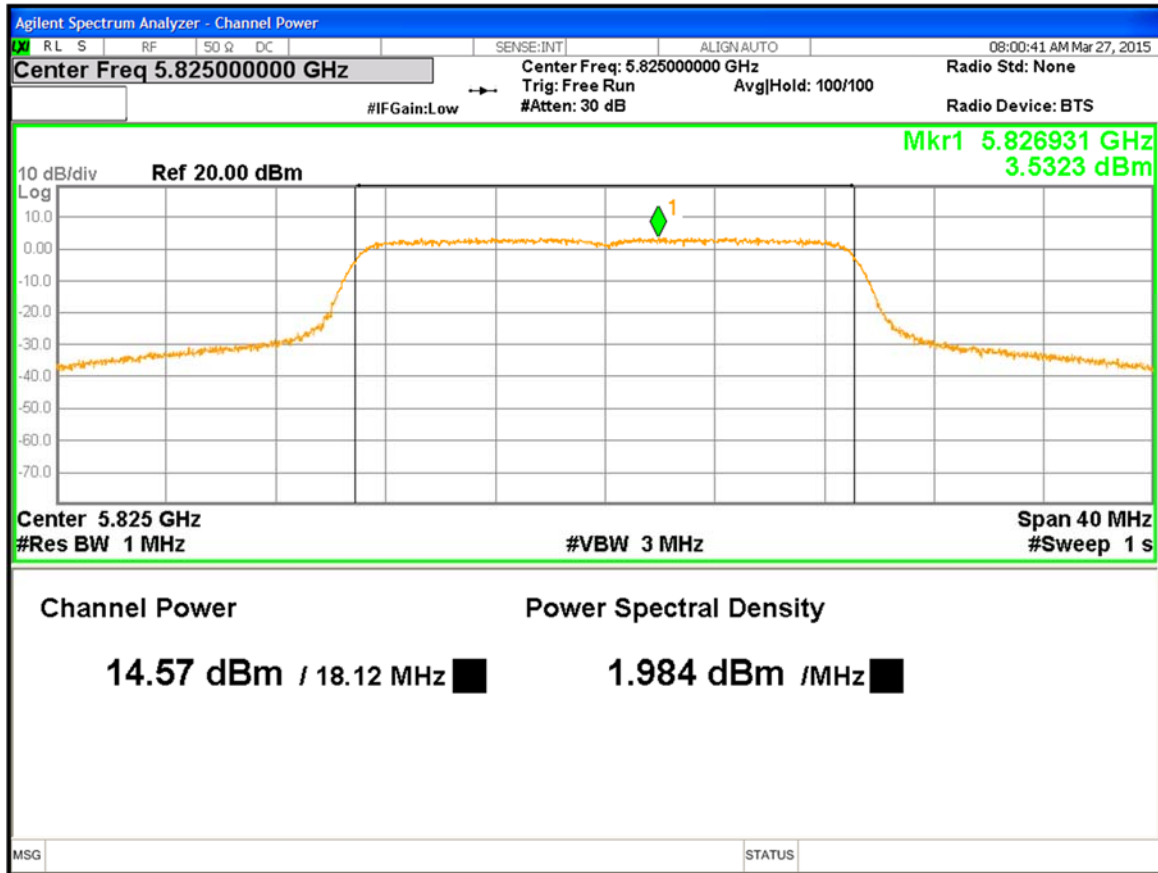


Figure 6: Maximum Transmitted Power, 5755 MHz at 11a, Chain 0



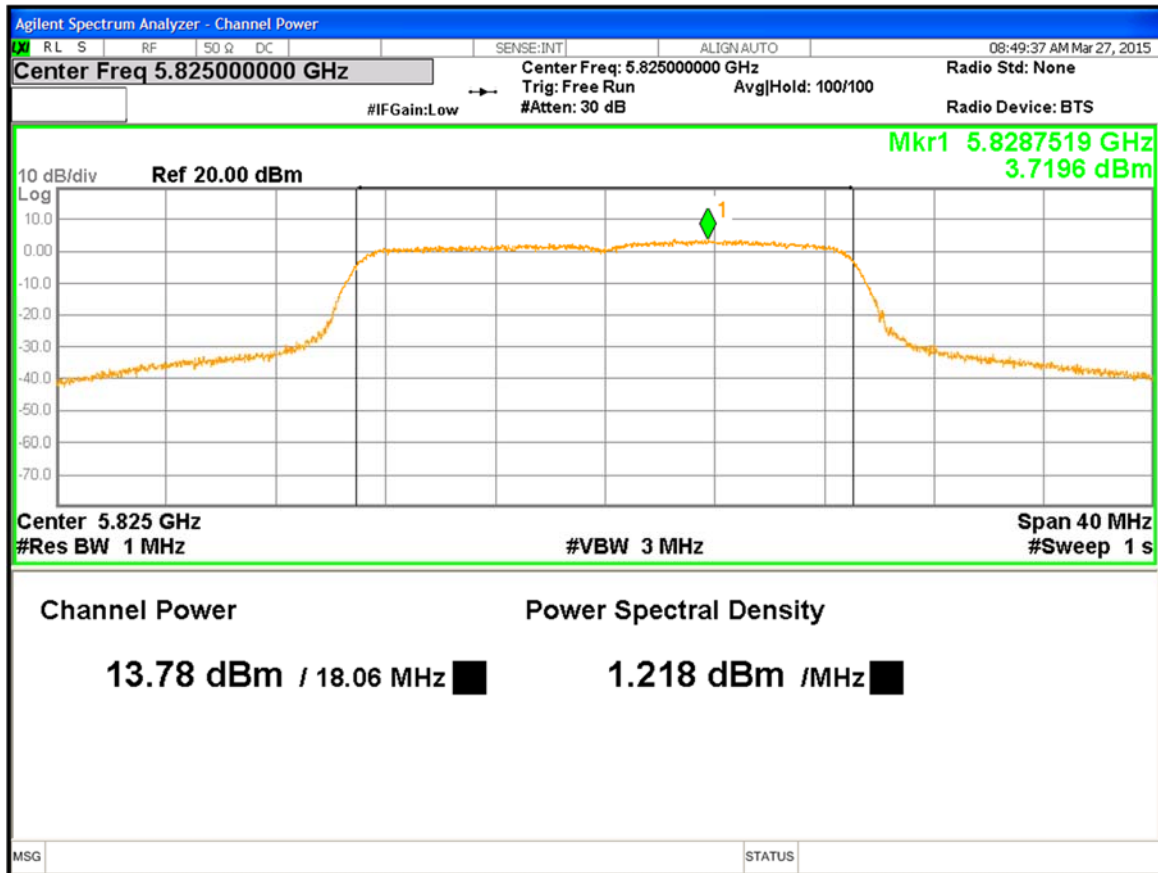


Figure 7: Maximum Transmitted Power, 5825MHz at HT20, Chain 2

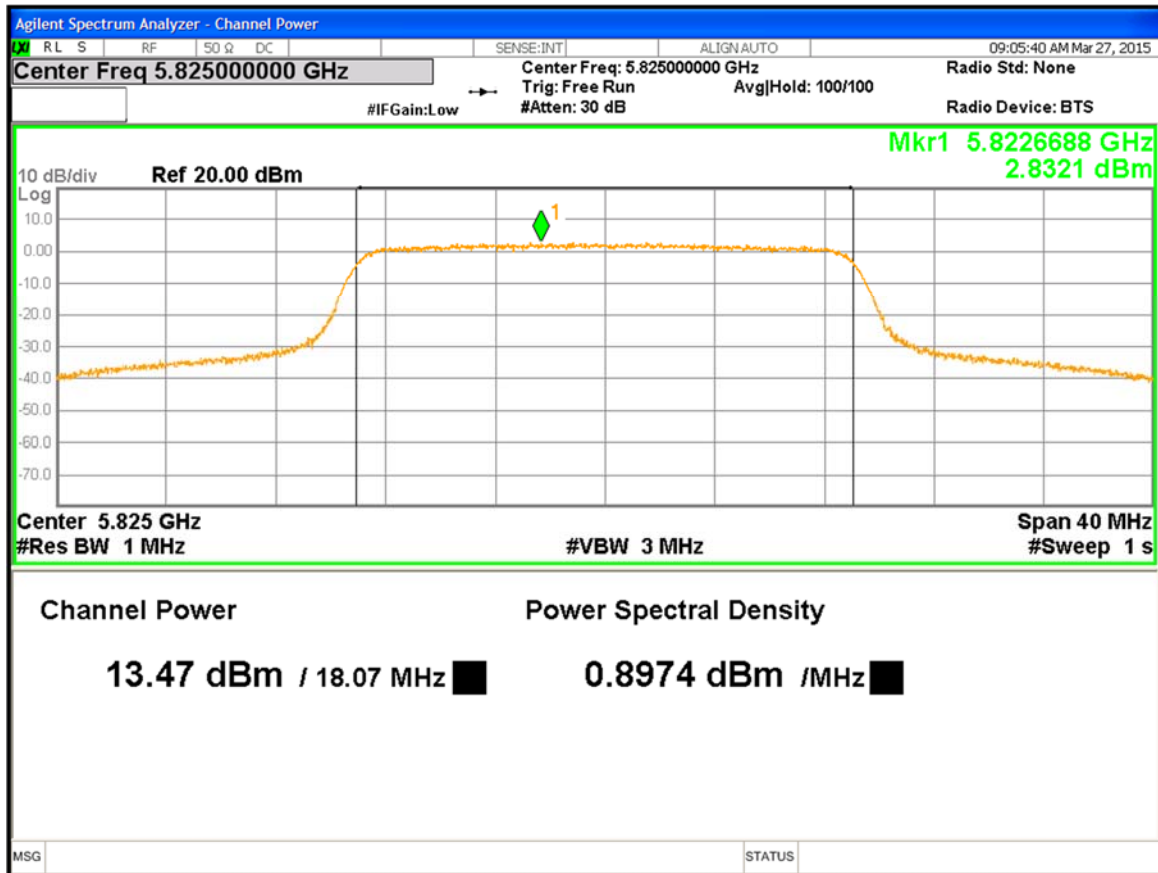


Figure 8: Maximum Transmitted Power, at 5825MHz HT20, Chain 3

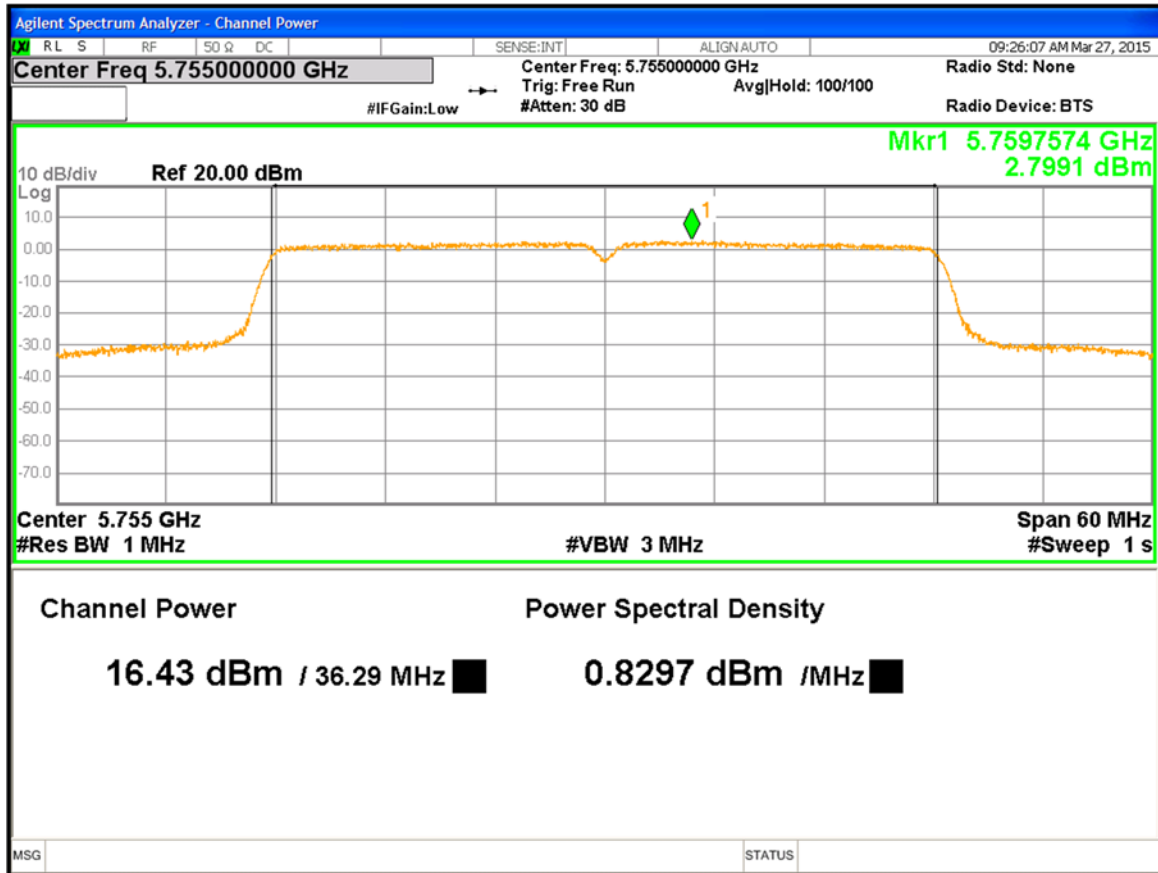


Figure 9: Maximum Transmitted Power, 5755MHz at HT40, Chain 1

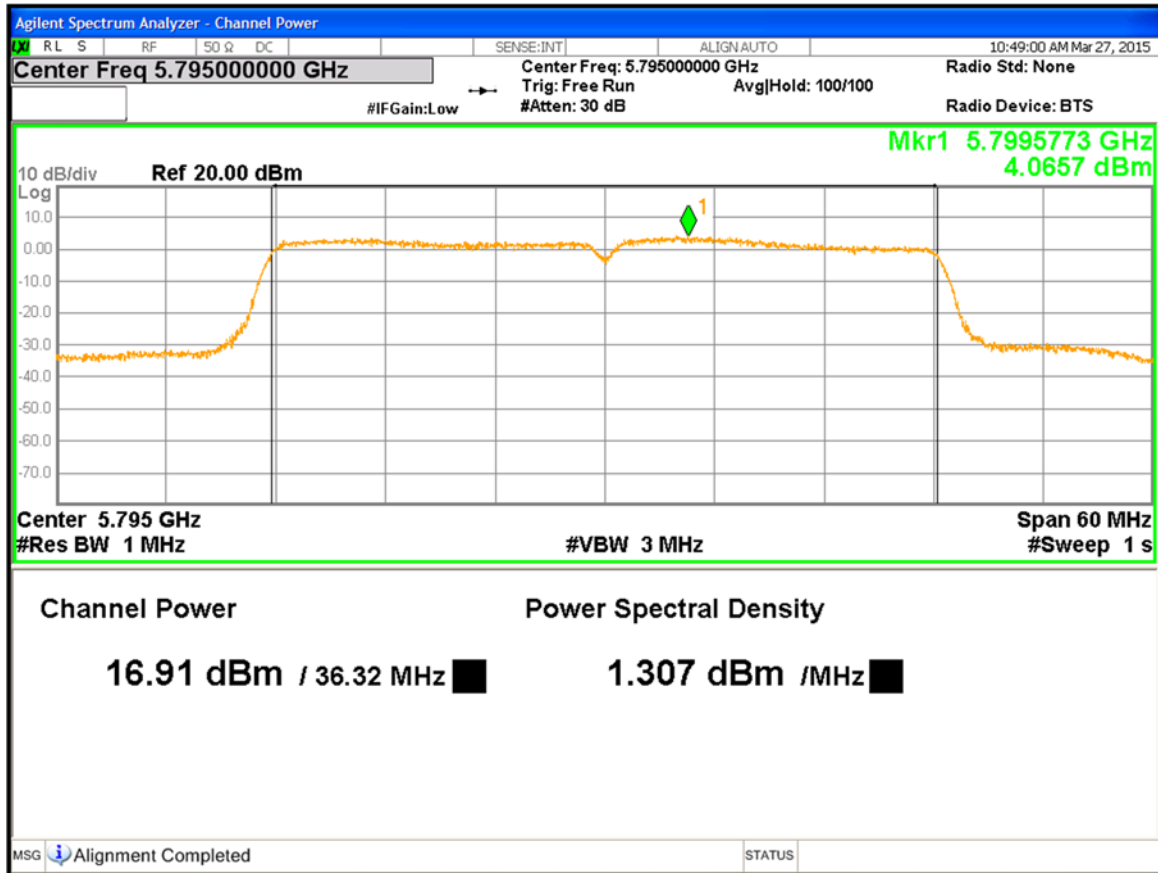


Figure 10: Maximum Transmitted Power, 5795MHz at HT40, Chain 2

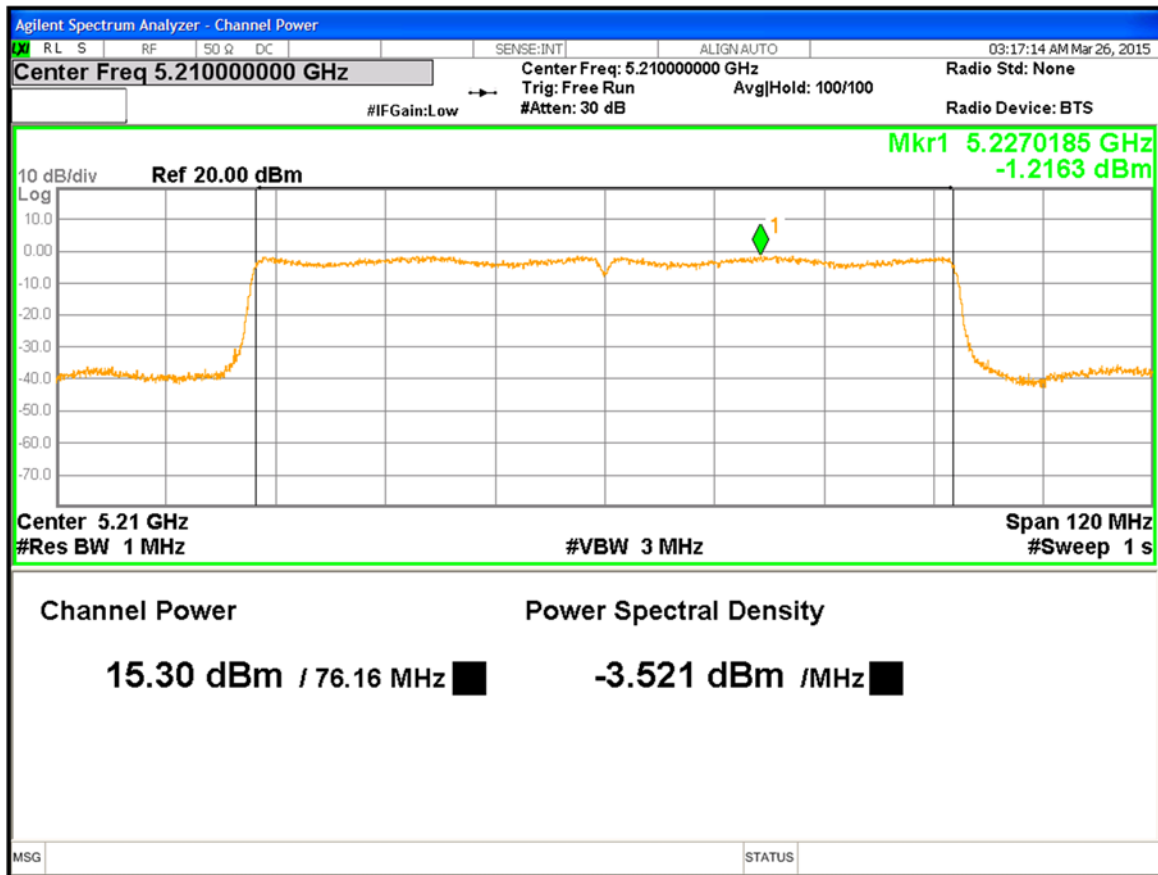


Figure 11: Maximum Transmitted Power, 5775 MHz at VHT80, Chain 2

## 4.2 Occupied Bandwidth

The occupied bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency.

The 99% bandwidth is the bandwidth in which 99% of the transmitted power occupied.


The 6dB bandwidth is defined the bandwidth of 6 dBr from highest transmitted level of the fundamental frequency.

There is no restriction limits for the bandwidth. The 6dB bandwidth was used to determine the limit for maximum conducted output power per CFR47 Part 15.407(a).

### 4.2.1 Test Method

The conducted method was used to measure the occupied bandwidth. The measurement was performed with modulation per CFR47 15.407(a) 2014. The preliminary investigation was performed to find the narrowest 26 dB bandwidth for each operational mode at different data rates. This worst finding was performed on 3 channels in each operating frequency range; 5725 MHz to 5850MHz. The worst results indicated below.

Test Setup:

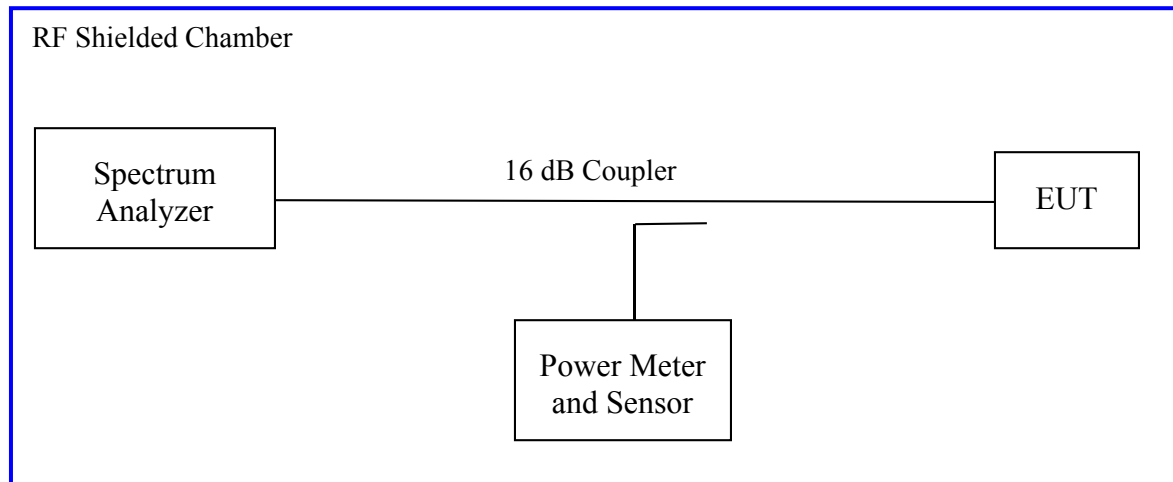

## 4.2.2 Results

These occupied bandwidth measurements were taken for references only.

**Table 4:** Occupied Bandwidth – Test Results

<b>Test Conditions:</b> Conducted Measurement, Normal Temperature and Voltage only								
<b>Antenna Type:</b> Integrated & External					<b>Power Setting:</b> See Test Plan			
<b>Min-Max. Directional Gain:</b> +2dBi & +12 dBi					<b>Signal State:</b> Modulated at 100%.			
<b>Ambient Temp.:</b> 21 °C					<b>Relative Humidity:</b> 33%			
<b>Bandwidth (MHz) for 802.11a</b>								
Freq. (MHz)	6dB Bandwidth (MHz)				99% Bandwidth (MHz)			
	Ch0	Ch1	Ch2	Ch3	Ch0	Ch1	Ch2	Ch3
5745	16.42	16.46	16.43	16.46	16.55	16.55	16.54	16.55
5785	16.47	16.38	16.43	16.41	16.55	16.54	16.54	16.55
5825	16.45	16.50	16.42	16.46	16.56	16.56	16.54	16.55
<b>Bandwidth (MHz) for 802.11n HT20/ VHT20</b>								
Freq. (MHz)	6dB Bandwidth (MHz)				99% Bandwidth (MHz)			
	Ch0	Ch1	Ch2	Ch3	Ch0	Ch1	Ch2	Ch3
5745	17.62	17.59	17.44	17.36	17.70	17.73	17.69	17.63
5785	17.62	17.59	17.44	17.46	17.72	17.70	17.66	17.65
5825	17.63	17.52	17.47	17.56	17.72	17.70	17.65	17.67
Note: The bandwidth was measured at 6.0 Mbps for 802.11a								
Note: The bandwidth was measured at 6.5 Mbps for 802.11n HT20								

Bandwidth (MHz) for 802.11n HT40 / VHT40								
Freq. (MHz)	6dB Bandwidth (MHz)				99% Bandwidth (MHz)			
	Ch0	Ch1	Ch2	Ch3	Ch0	Ch1	Ch2	Ch3
5755	35.90	35.66	35.70	35.93	36.19	36.07	36.11	36.29
5795	35.92	35.80	35.78	35.95	36.18	36.15	36.14	36.26

**Note:** The bandwidth was measured at 13.5Mbps for 802.11n HT40 mode.

Bandwidth (MHz) for 802.11AC VHT80								
Freq. (MHz)	6dB Bandwidth (MHz)				99% Bandwidth (MHz)			
	Ch0	Ch1	Ch2	Ch3	Ch0	Ch1	Ch2	Ch3
5775	76.19	76.00	76.09	76.33	75.73	75.63	75.72	75.72

**Note:** The bandwidth was measured at 56.5Mbps for 802.11AC VHT80 mode.



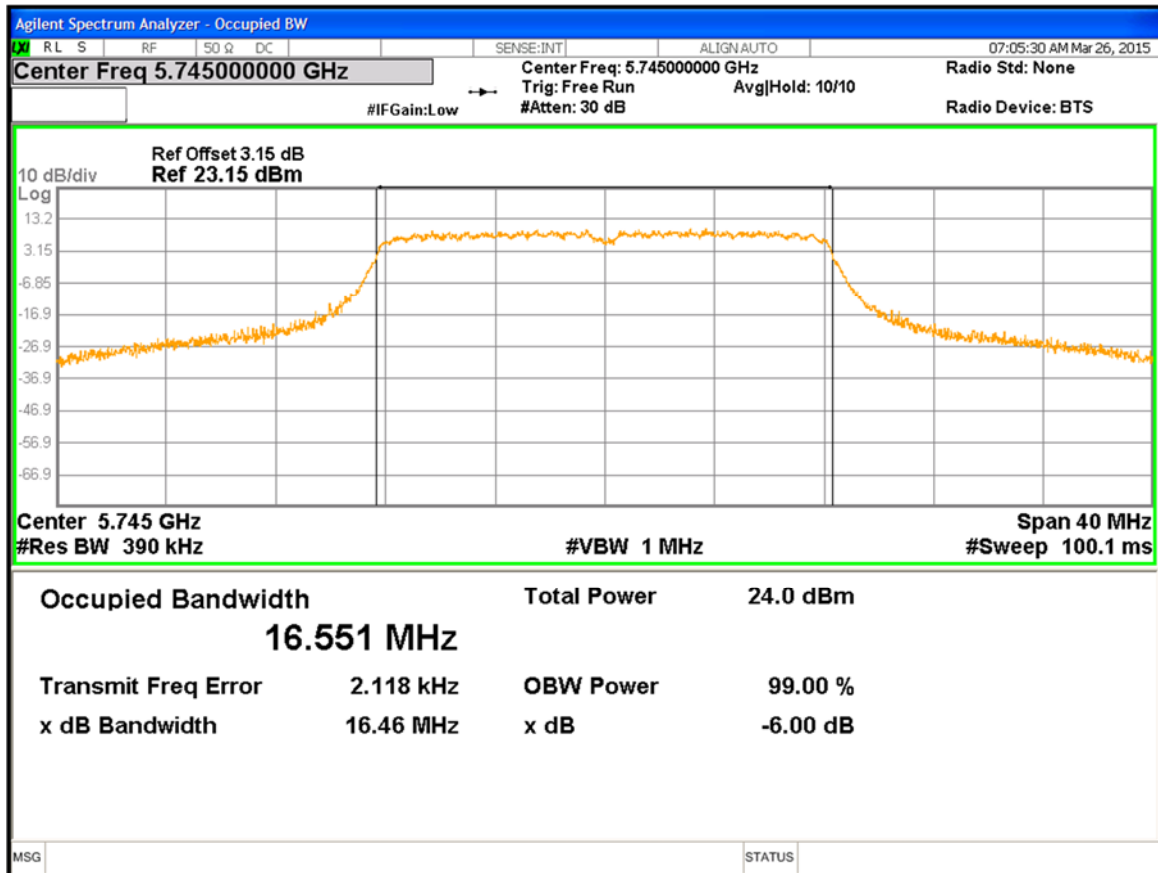


Figure 12: 6 dB and 99% Bandwidth at 5745MHz, Chain 1

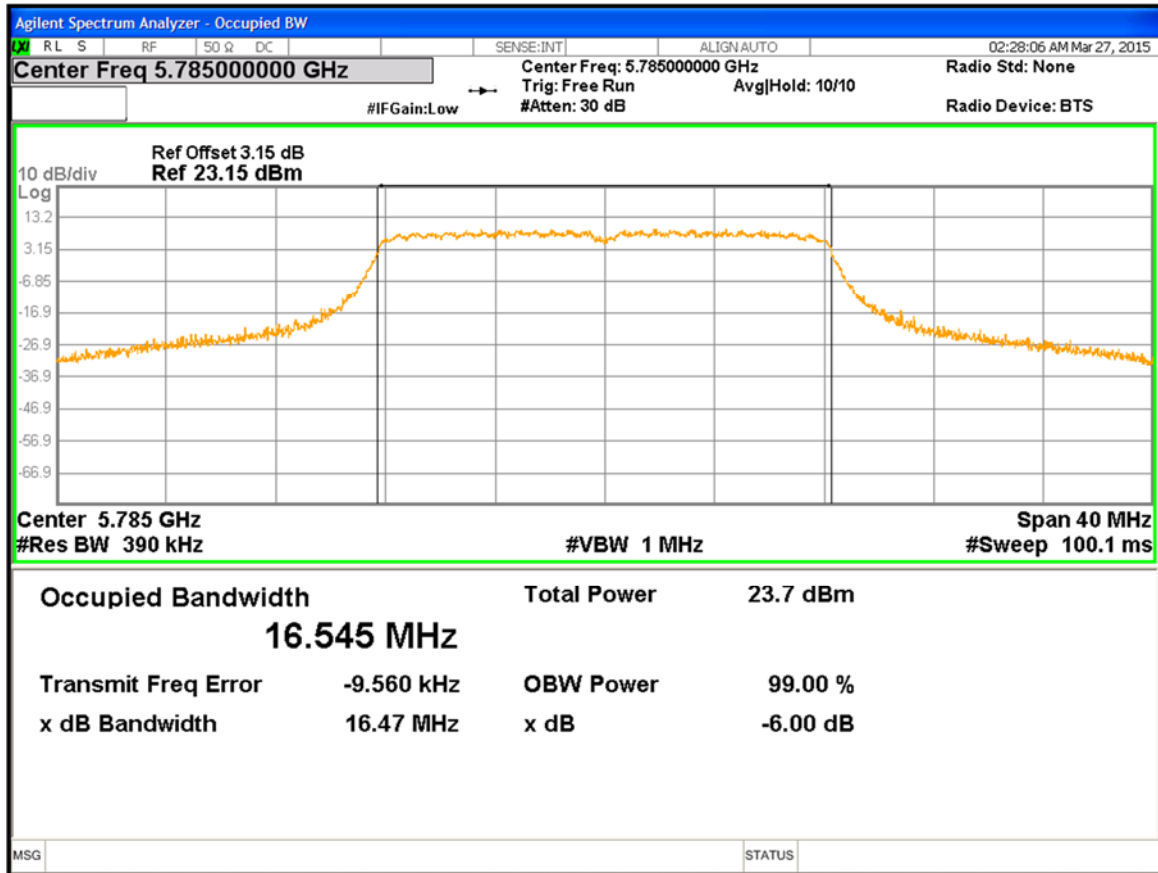


Figure 13: 6 dB and 99% Bandwidth at 5785 MHz, Chain 0, 11a mode

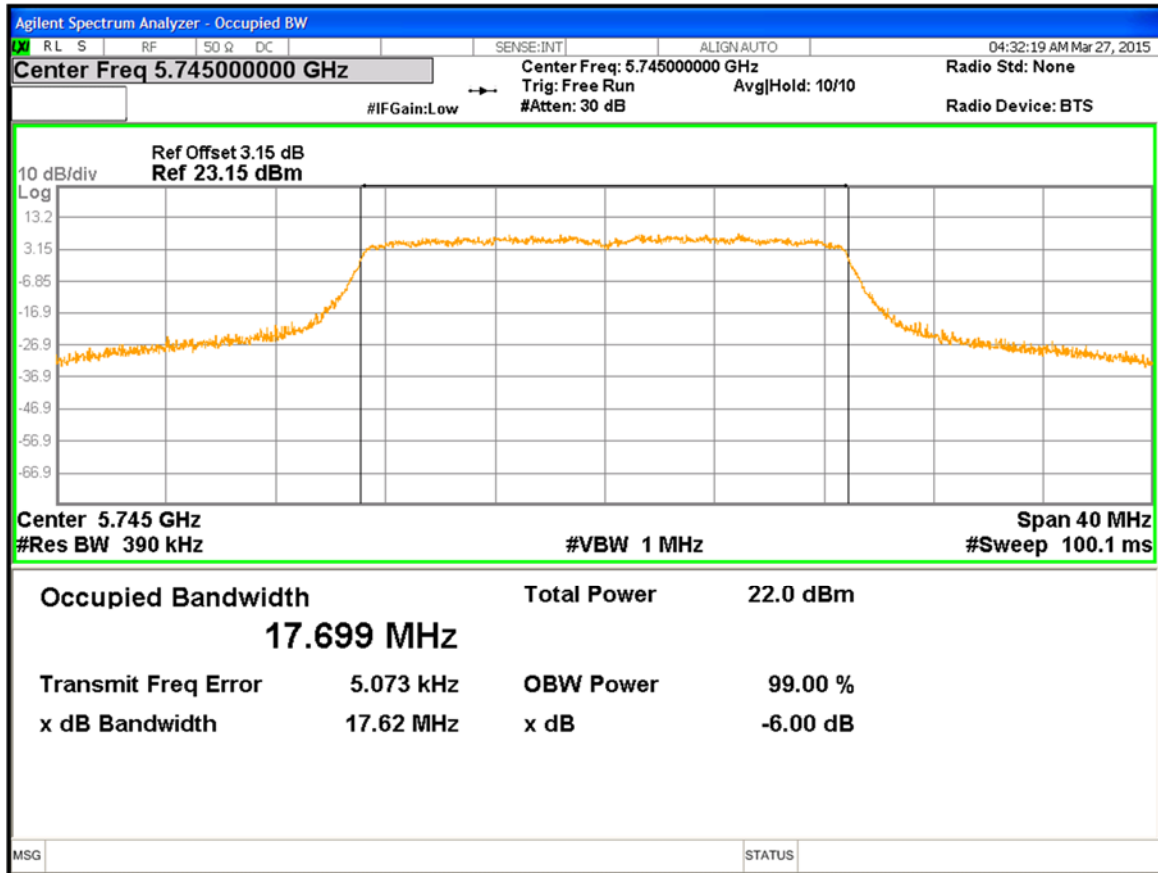


Figure 14: 6 dB and 99% Bandwidth at 5745 MHz, Chain 0 and HT20 mode at 6.5Mbps

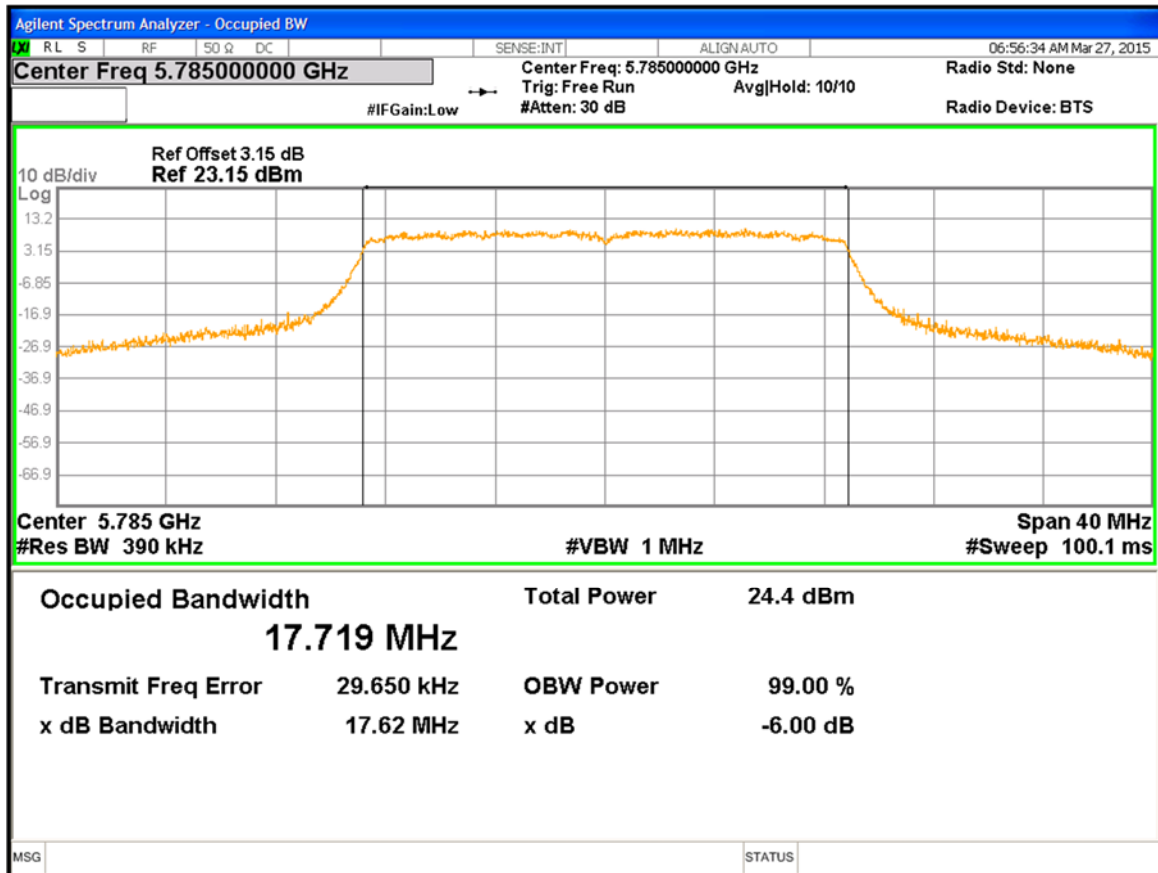


Figure 15: 6 dB and 99% Bandwidth at 5875 MHz, Chain 0 and HT 20mode at 6.5Mbps

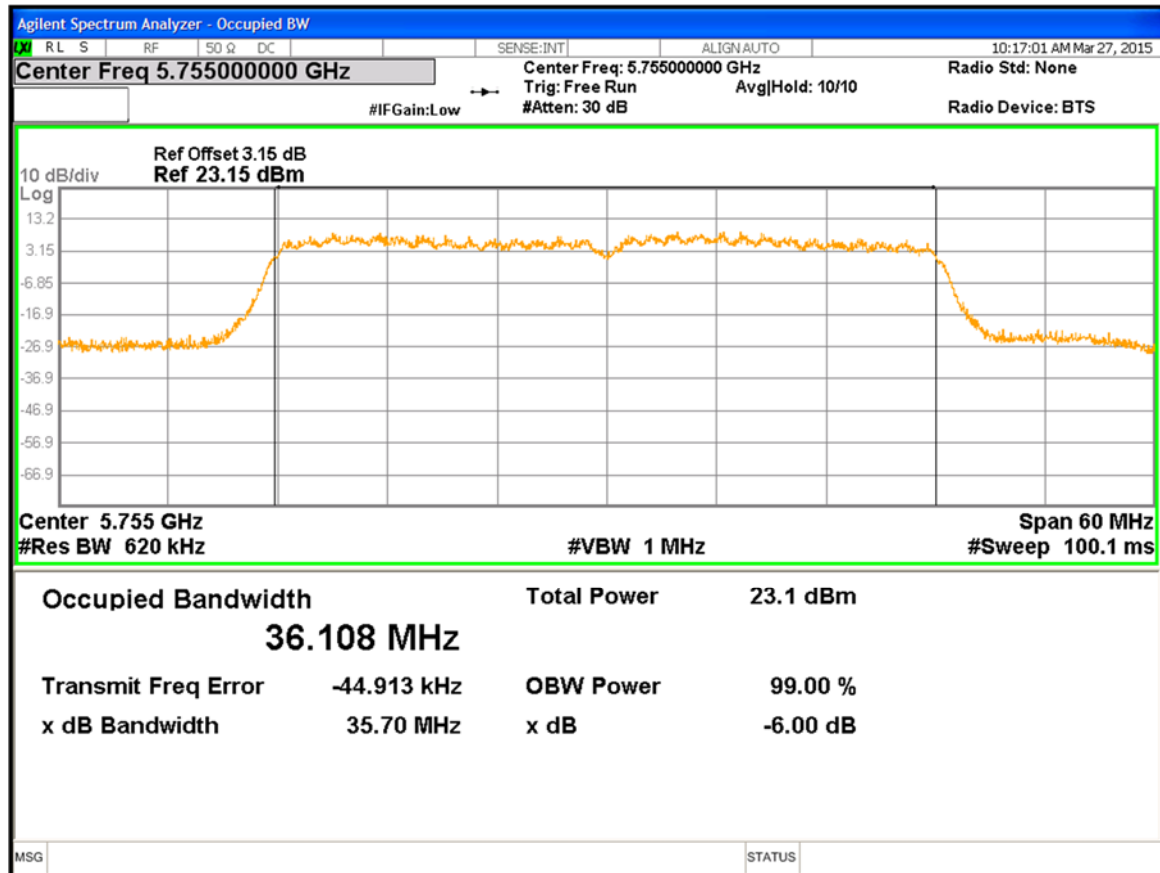


Figure 16: 26 dB and 99% Bandwidth at 5755 MHz, Chain 2 and HT40 Mode at 13.5Mbps

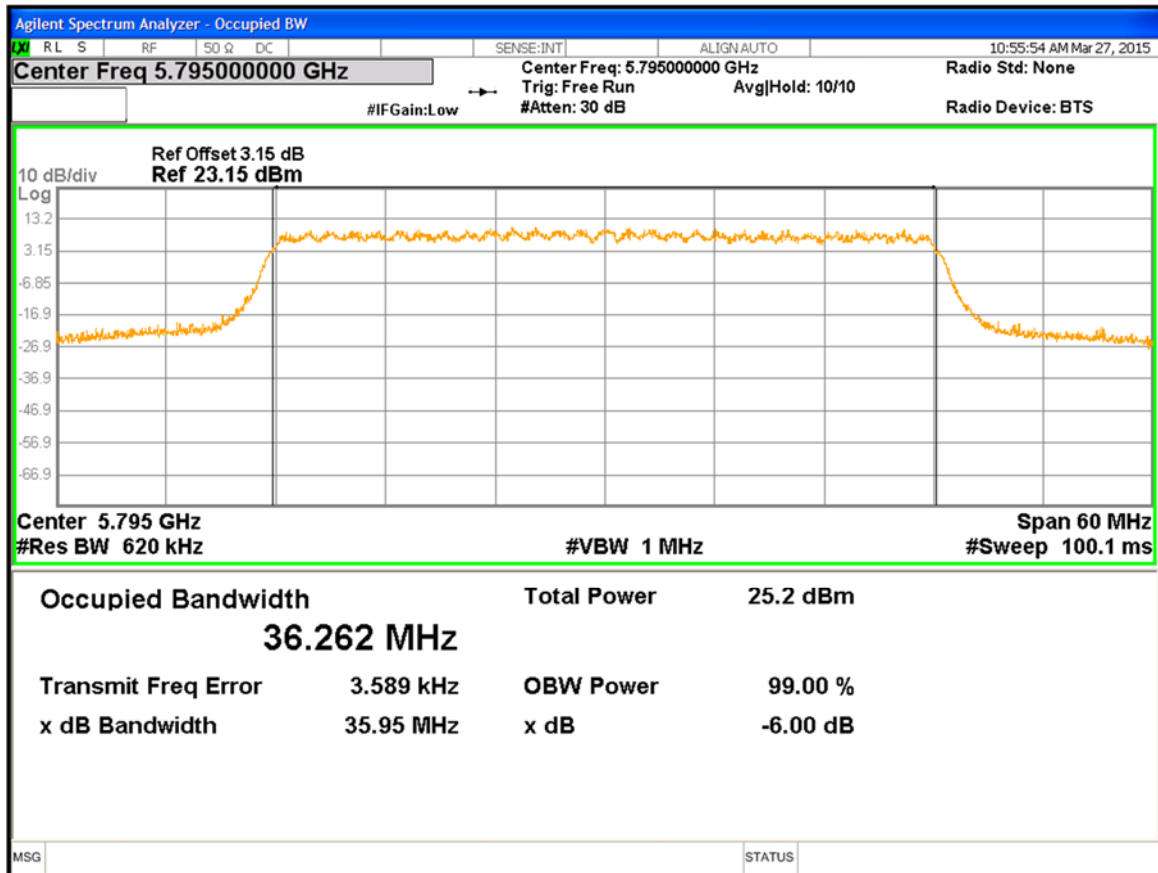


Figure 17: 6 dB and 99% Bandwidth at 5795 MHz, Chain 1 and HT40 mode at 13.5Mbps

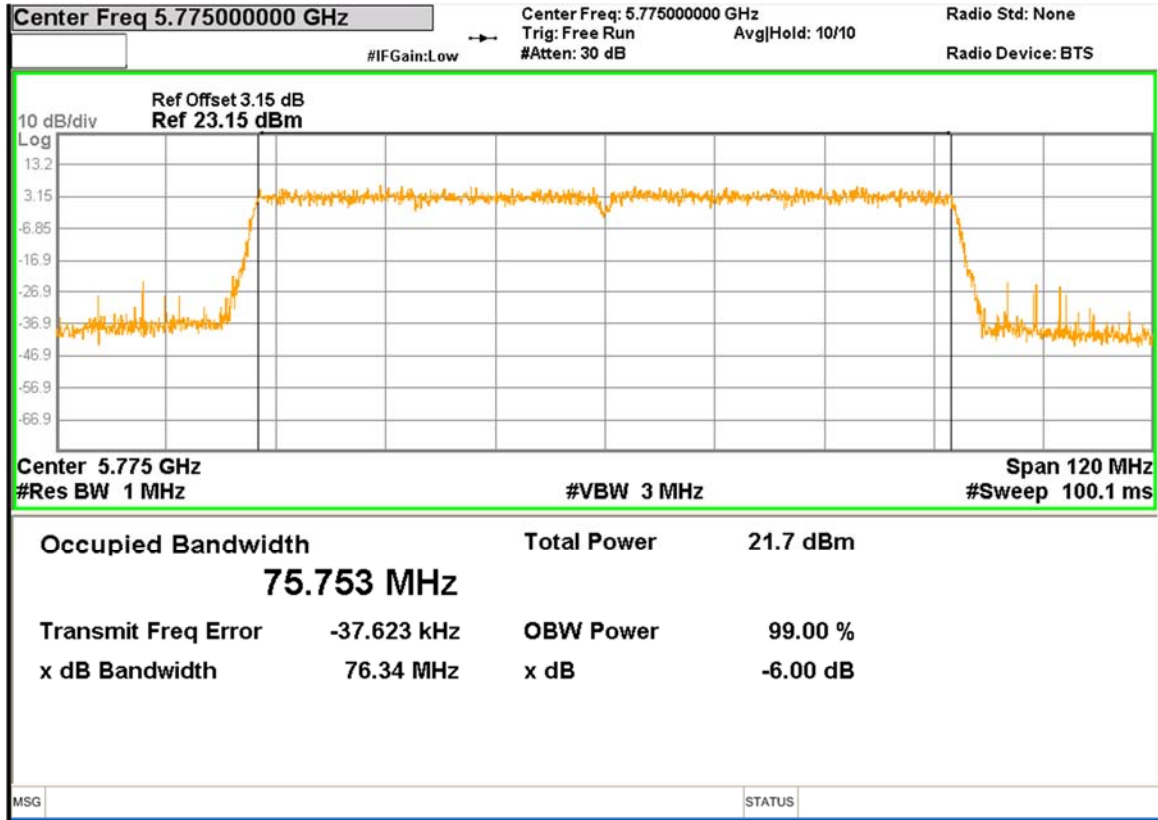


Figure 18: 26 dB and 99% Bandwidth at 5775 MHz, Chain 3 and VHT80 mode


### 4.3 Peak Power Spectral Density

*According to the CFR47 Part 15.407 (a) the spectral power density output of the antenna port shall be less than 30dBm in any 1 MHz band during any time interval of continuous transmission.*

#### 4.3.1 Test Method

The conducted method was used to measure the channel power output per ANSI C63.10-2009 Section 6.11.2. The measurement was performed with modulation per CFR47 Part 15.407 (a). Pre-evaluation was performed to find the worst modes. The worst findings were conducted on 3 channels in each operating frequency range of 5725 MHz to 5850MHz. The worst sample results are indicated below.

Test Setup:

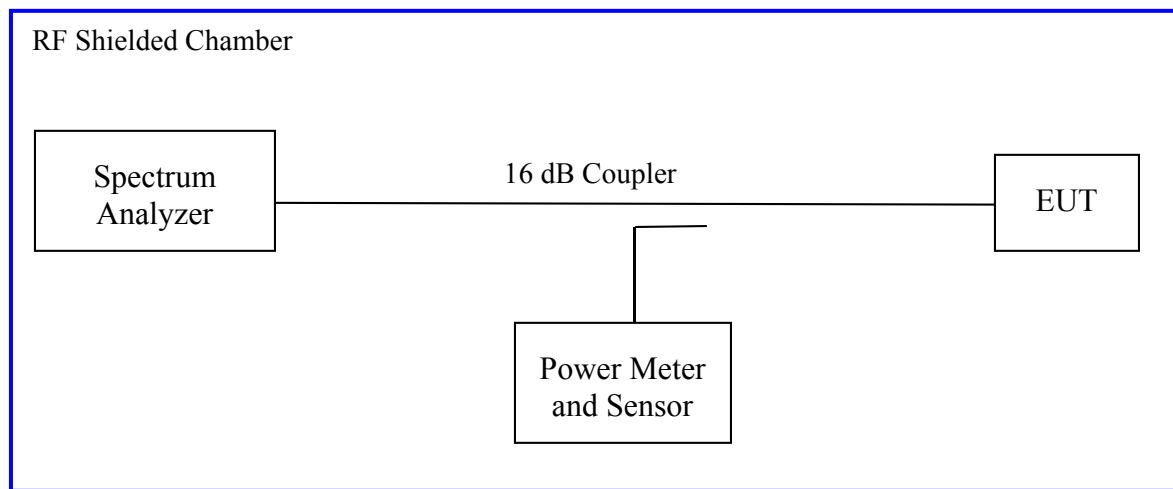



### 4.3.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

**Table 5: Peak Power Spectral Density – Test Results**

<b>Test Conditions:</b> Conducted Measurement, Normal Temperature and Voltage only							
<b>Antenna Type:</b> Integrated & External				<b>Power Setting:</b> See Test plan			
<b>Min-Max. Directional Gain:</b> +2dBi & 12 dBi				<b>Signal State:</b> Modulated at 100%.			
<b>Ambient Temp.:</b> 23° C				<b>Relative Humidity:</b> 32%			
<b>Peak Power Spectral Density</b>							
<b>802.11a Mode</b>							
Freq. (MHz)	CH0 [dBm]	CH1 [dBm]	CH2 [dBm]	CH3 [dBm]	Combined PSD [dBm]	Limit [dBm]	Margin [dB]
5745	3.92	2.94	2.38	2.34	8.96	27.5	-18.54
5785	2.52	0.82	1.43	1.38	7.60	27.5	-19.90
5825	3.38	2.74	1.41	0.69	8.20	27.5	-19.30
<p><b>Note:</b> 1. The highest peak output power was observed at 11 a 6.0 MBps per data stream.          2. All chains will be on at all time. PSD were summed in accordance with ANSI C63.10; 2009 per KDB 662911          3. The lowest antenna gain for APIN0325 with internal Antennas would be 5.5 dBi. The directional gain with Beam forming is 3.5dBi. Total directional gain will be 9 dBi.          4. For APIN0325 unit with External antennas minimum and maximum gains beam forming turned OFF are 2dBi and 8.5dBi, and with Beam forming ON are 8.5dBi and 12dBi          5. As Per CFR47 Part 15.407 (a), the limit is reduced for every 1 dB gain exceeding 6dBi.          The limit would be 27.5 for max gain antenna of 8.5dBi as shown on the table above.          6. Beamforming was not considered for this mode List of antennas is given Section 6.4 of this report. PSD          7. Highlighted Plots are placed in the report</p>							

Peak Power Spectral Density			
802.11 HT20/VHT20 Mode			
Freq. (MHz)	Total PSD [dBm]	Limit [dBm]	Margin [dB]
5745	7.44	24	-16.56
5785	8.58	24	-15.42
5825	7.50	24	-16.50

**Note:** 1. The highest peak output power was observed at **HT20 6.5 Mbps** per data stream.  
 2. All chains will be on at all time and beam performing. RF output powers were summed in accordance with ANSI C63.10; 2009 per KDB 662911  
 3. The lowest antenna gain for APIN0325 with internal Antennas would be 5.5 dBi. The directional gain with Beam forming is 3.5dBi. Total directional gain will be 9 dBi.  
 4. For APIN0325 unit with External antennas minimum and maximum gains beam forming turned OFF are 2dBi and 7.5dBi, and with Beam forming ON are 8.5dBi and 12dBi  
 5. As Per CFR47 Part 15.407 (a), the limit is reduced for every 1 dB gain exceeding 6dBi.  
 The limit would be 24.0dBm for max gain antenna of 12dBi as shown on the plot.  
 6. Total PSD is the combined worst case PSD.  
 7. **The PSD limit above is for highest gain antenna with Beam Forming ON.** List of antennas is given Section 6.4 of this report.

Peak Power Spectral Density					
802.11 HT40/VHT40 Mode					
Freq. (MHz)	Total PSD [dBm]	CF [dB]	Total PSD [dBm]	Limit [dBm]	Margin [dB]
5755	5.15	0.46	5.61	24	-18.39
-5795	7.13	0.46	7.59	24	-16.41

**Note:** 1. The highest peak output power was observed at HT40 13.5Mbps per data stream.  
 2. All chains will be on at all time and beam performing. RF output powers were summed in accordance with ANSI C63.10; 2009 per KDB 662911  
 3. The lowest antenna gain for APIN0325 with internal Antennas would be 5.5 dBi. The directional gain with Beam forming is 3.5dBi. Total directional gain will be 9 dBi.  
 4. For APIN0325 unit with External antennas minimum and maximum gains beam forming turned OFF are 2dBi and 7.5dBi, and with Beam forming ON are 8.5dBi and 12dBi  
 5. As Per CFR47 Part 15.407 (a), the limit is reduced for every 1 dB gain exceeding 6dBi. The limit would be 24.0dBm for max gain antenna of 12dBi as shown on the plot.  
 6. Total PSD is the combined worst case PSD.  
 7. **The PSD limit above is for highest gain antenna with Beam Forming turned ON.** List of antennas is given Section 6.4 of this report.

802.11n AC (VHT80) Mode					
Freq. (MHz)	Total PSD [dBm]	CF [dB]	Max. PPSD [dBm]	Limit [dBm]	Margin [dB]
5775	7.82	1.22	9.02	24	-14.98
<p><b>Note:</b> 1. The highest peak output power was observed at VHT80 58.5 Mbps per data stream.            2. All chains will be on at all time and beam performing. RF output powers were summed in accordance with ANSI C63.10; 2009 per KDB 662911            3. The lowest antenna gain for APIN0325 with internal Antennas would be 5.5 dBi. The directional gain with Beam forming is 3.5dBi. Total directional gain will be 9 dBi.            4. For APIN0325 unit with External antennas minimum and maximum gains beam forming turned OFF are 2dBi and 7.5dBi, and with Beam forming ON are 8.5dBi and 12dBi            5. As Per CFR47 Part 15.407 (a), the limit is reduced for every 1 dB gain exceeding 6dBi. The limit would be 24.0dBm for max gain antenna of 12dBi as shown on the plot.            6. Total PSD is the combined worst case PSD.            7. <b>The PSD limit above is for Highest gain antenna with Beam Forming turned ON.</b> List of antennas is given Section 6.4 of this report.</p>					

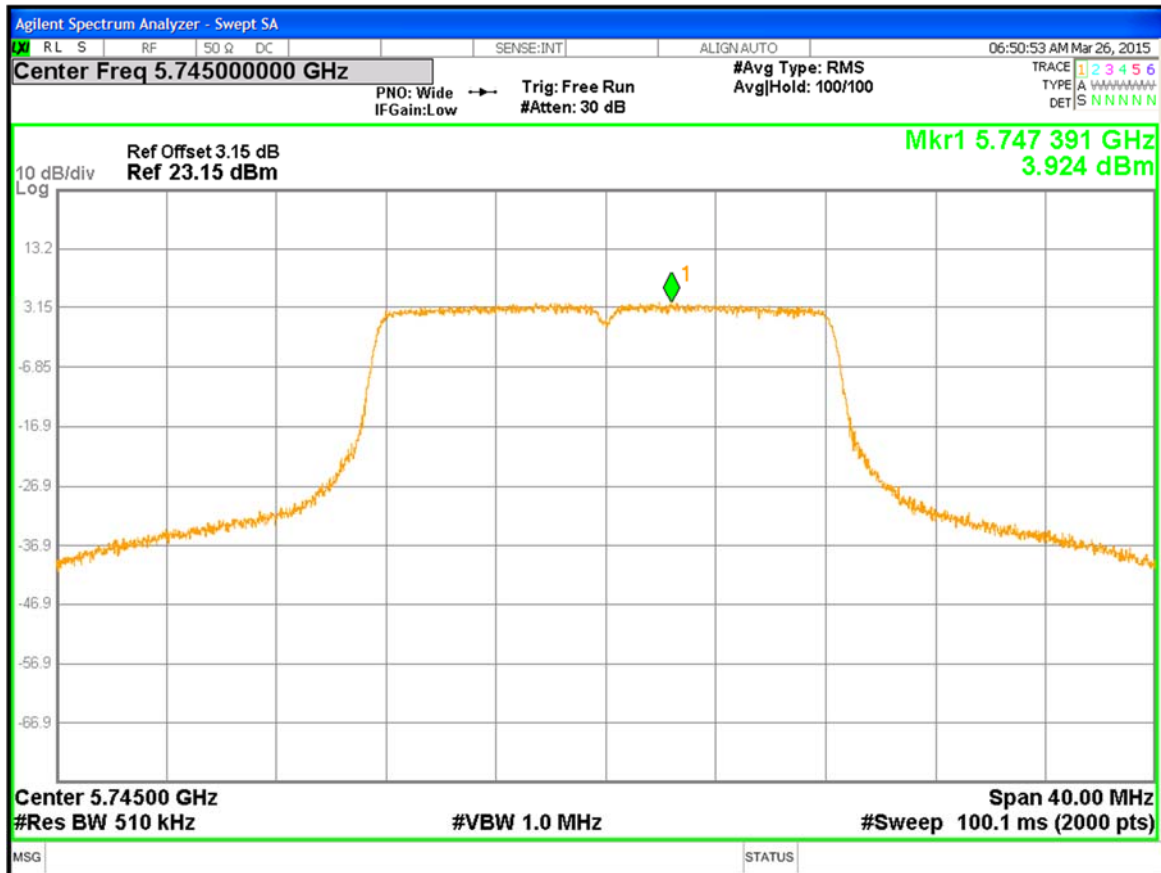


Figure 19: Power Spectral Density, 5745 MHz at 802.11a – 6.0 Mbps Chain 0

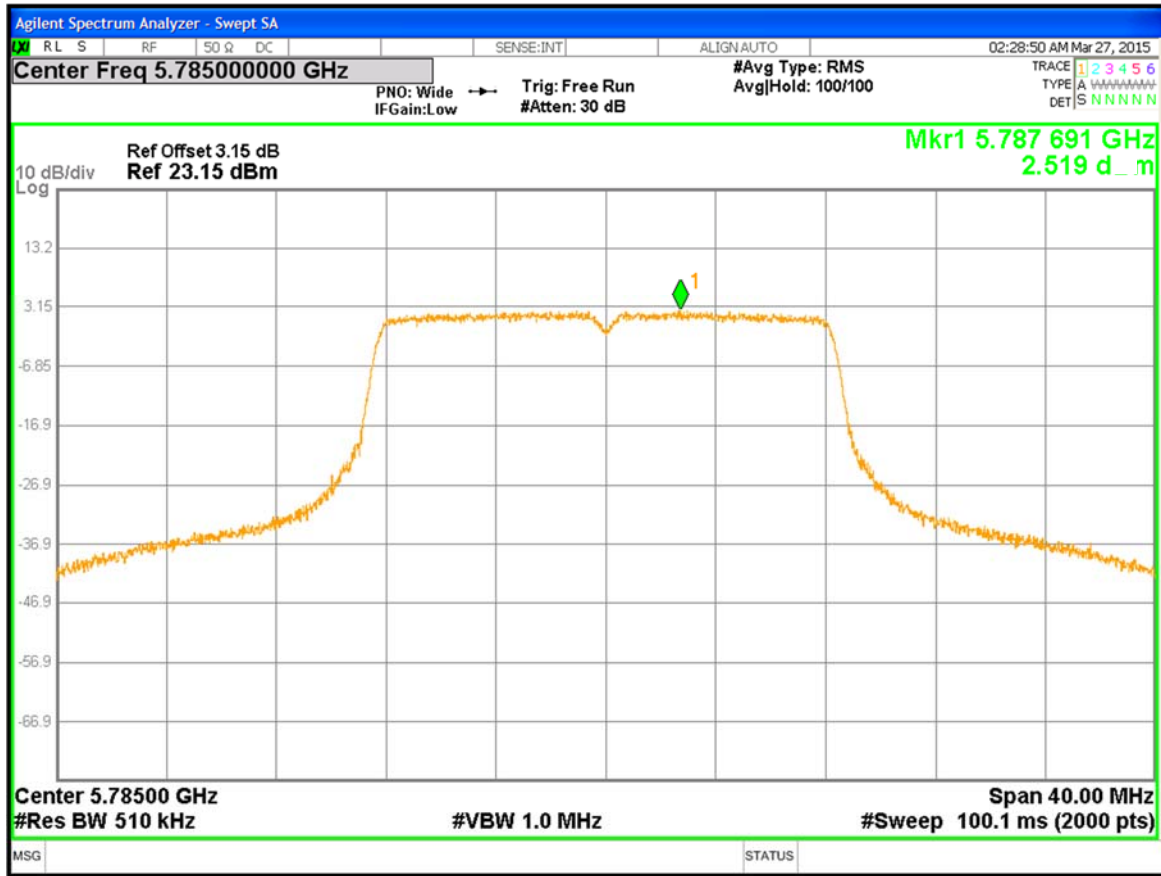


Figure 20: Power Spectral Density, 5785 MHz at 802.11a, Chain 1 – 6.0 Mbps



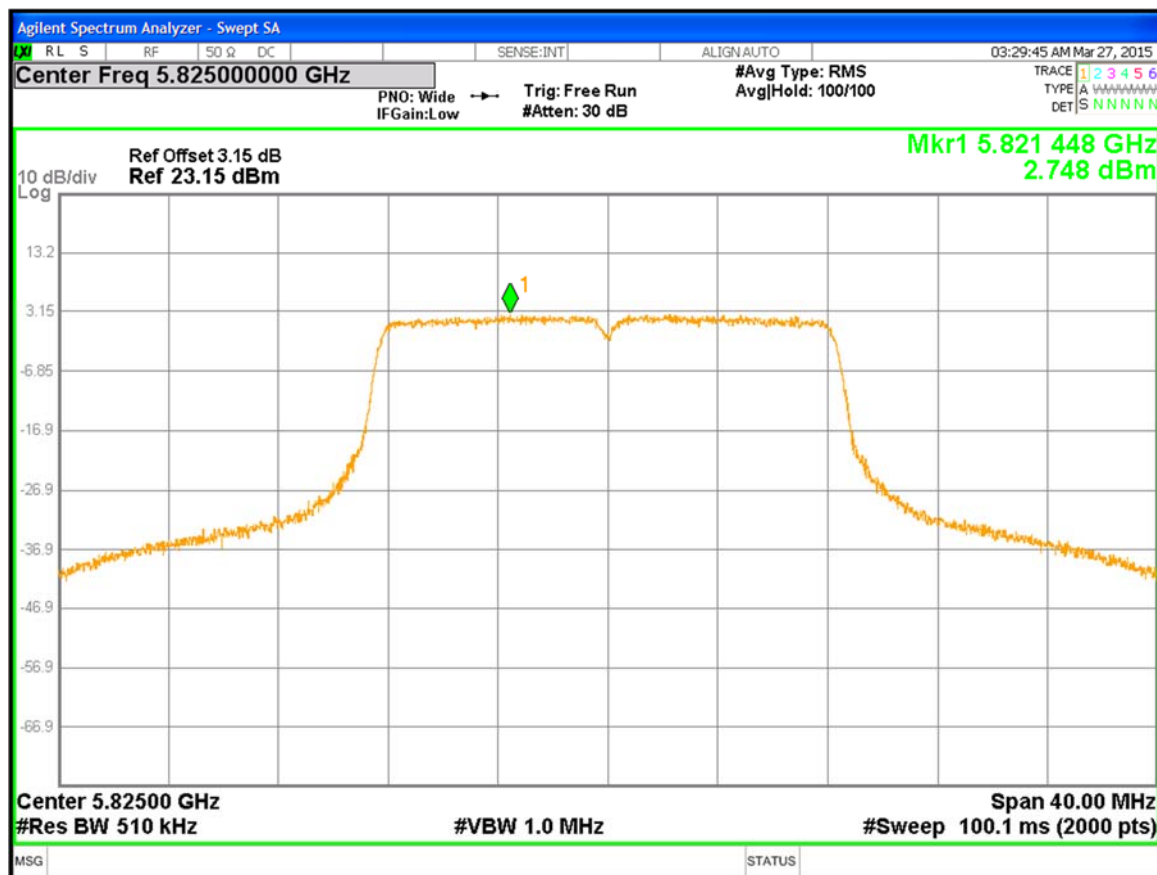


Figure 21: Power Spectral Density, 5825 MHz at 802.11a, 6.0 Mbps chain 1




**Figure 22:** Combined Peak Power Spectral Density, 5745MHz at 802.11n, HT 20 and 6.5 Mbps

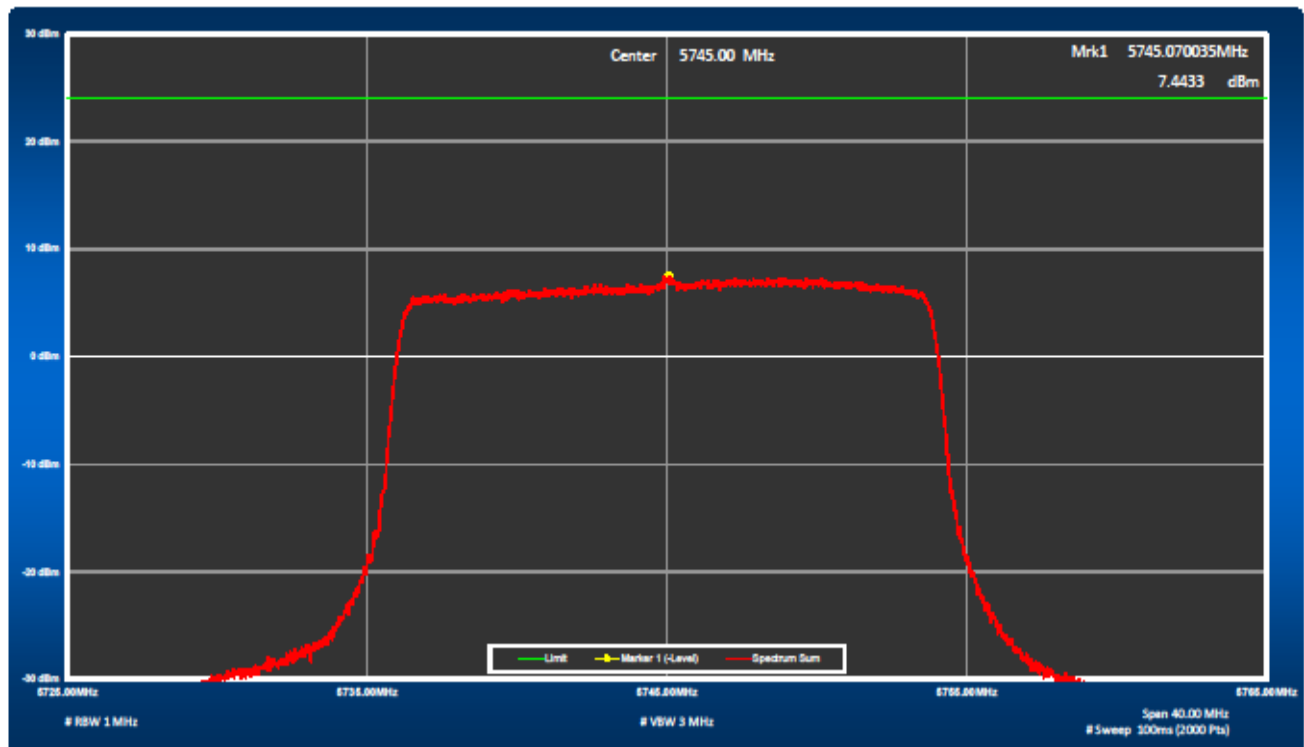


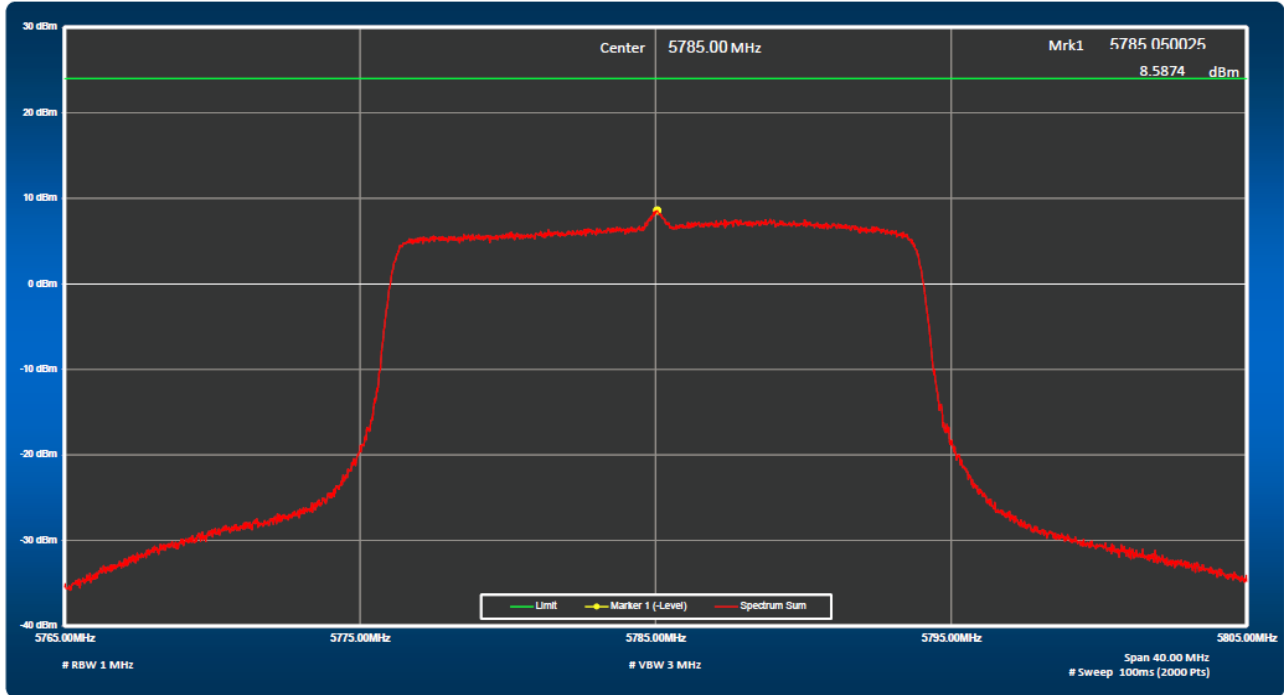


**Figure 23:** Peak Power Spectral Density, 5785MHz at 802.11n, HT20 and 6.5 Mbps

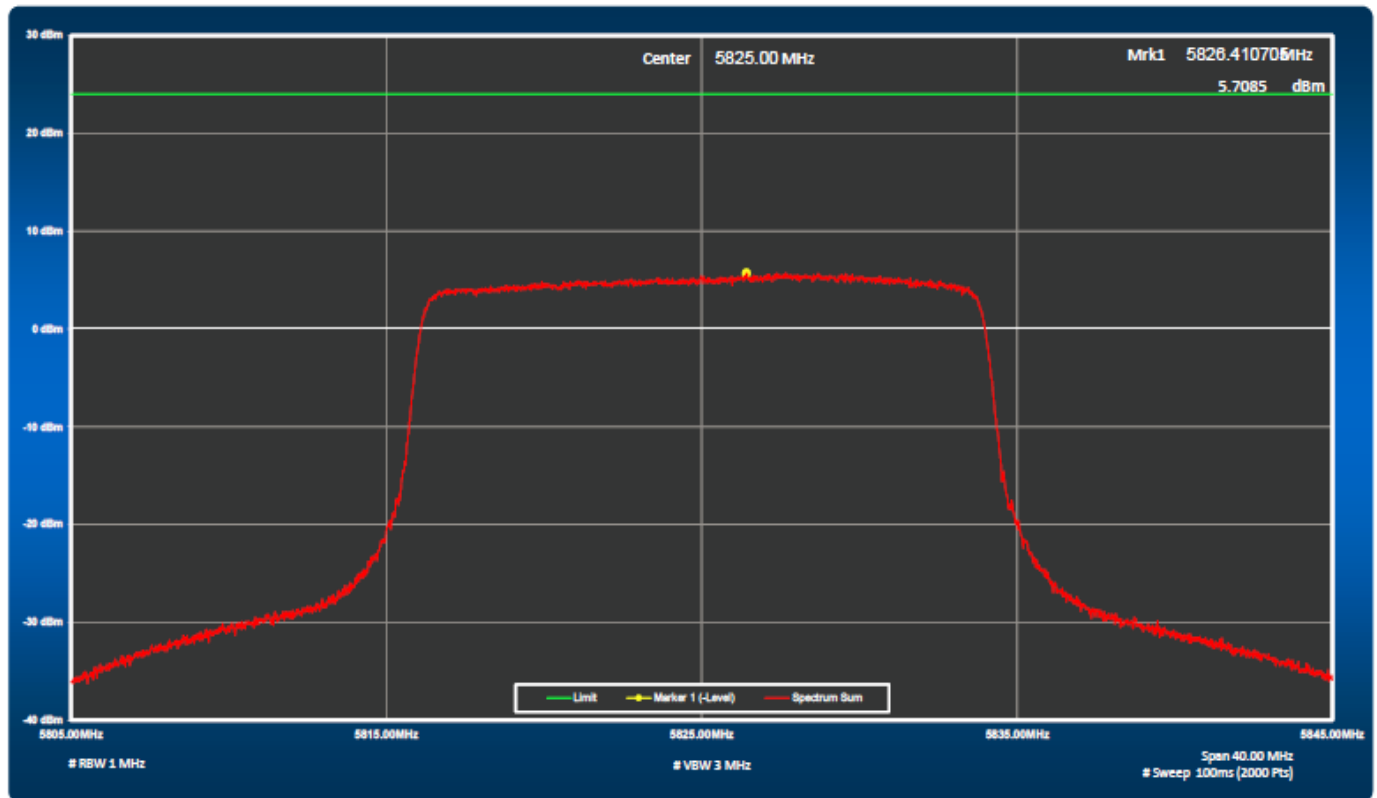


**Figure 24:** Peak Power Spectral Density, 5825 MHz at 802.11n, HT 20 and 6.5 Mbps

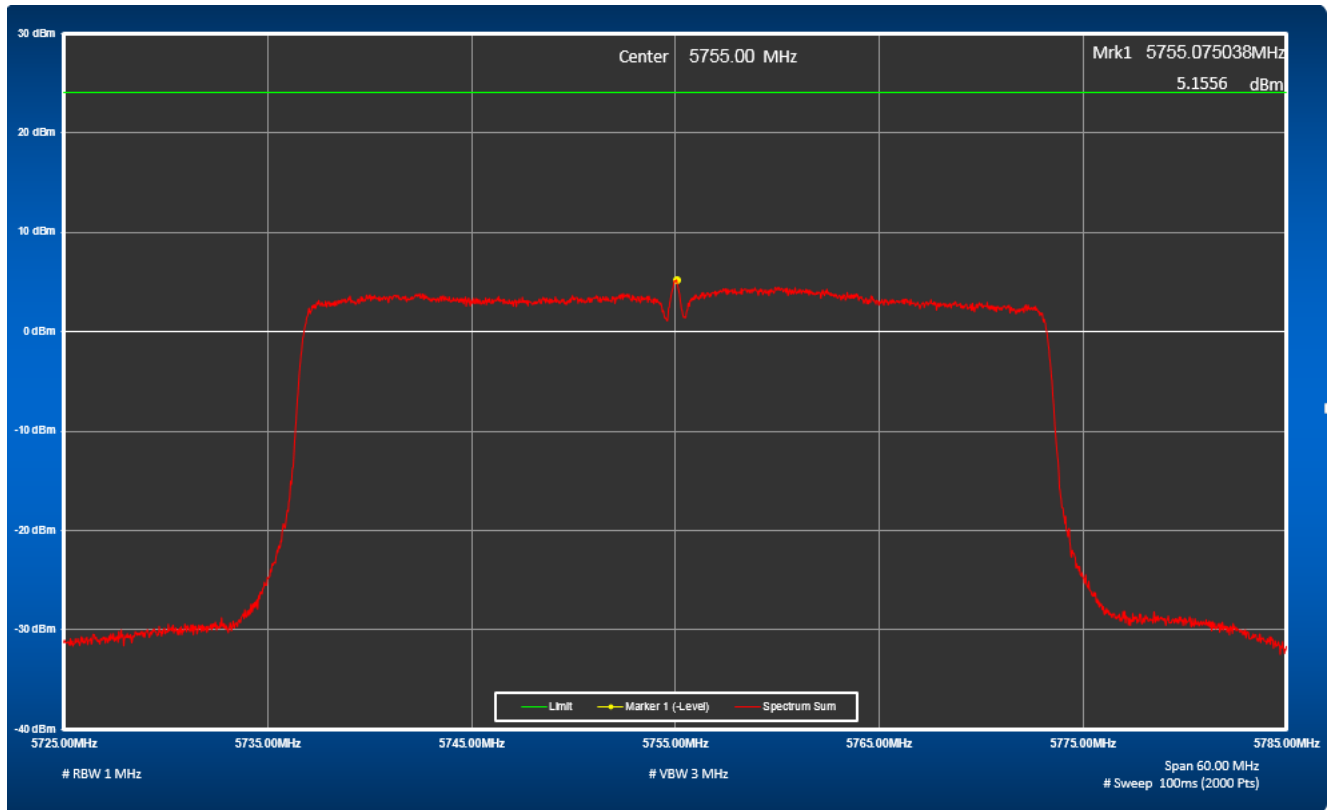

**Figure 25:** Peak Power Spectral Density, 5755 MHz at 802.11n, HT40– 13.5 Mbps

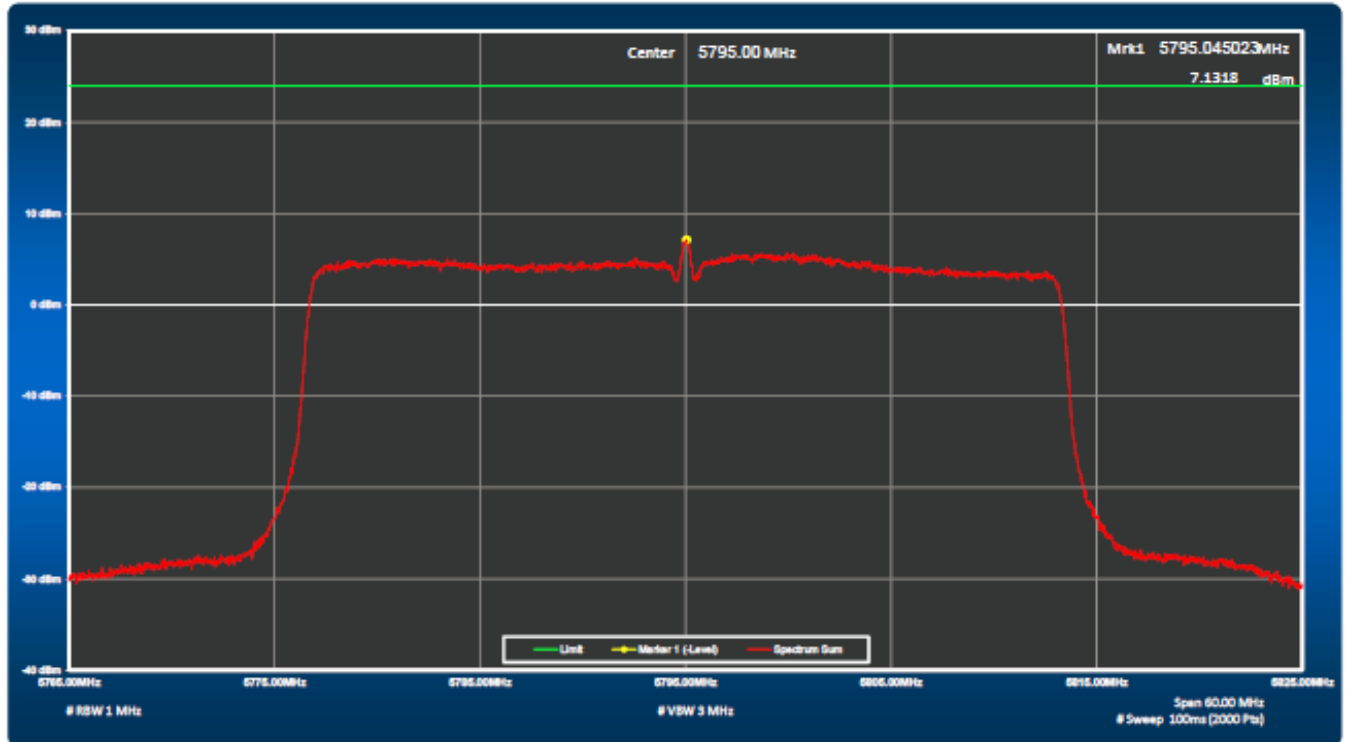

**Figure 26:** Peak Power Spectral Density, 5795MHz at 802.11n, HT 40 mode-13.5Mbps

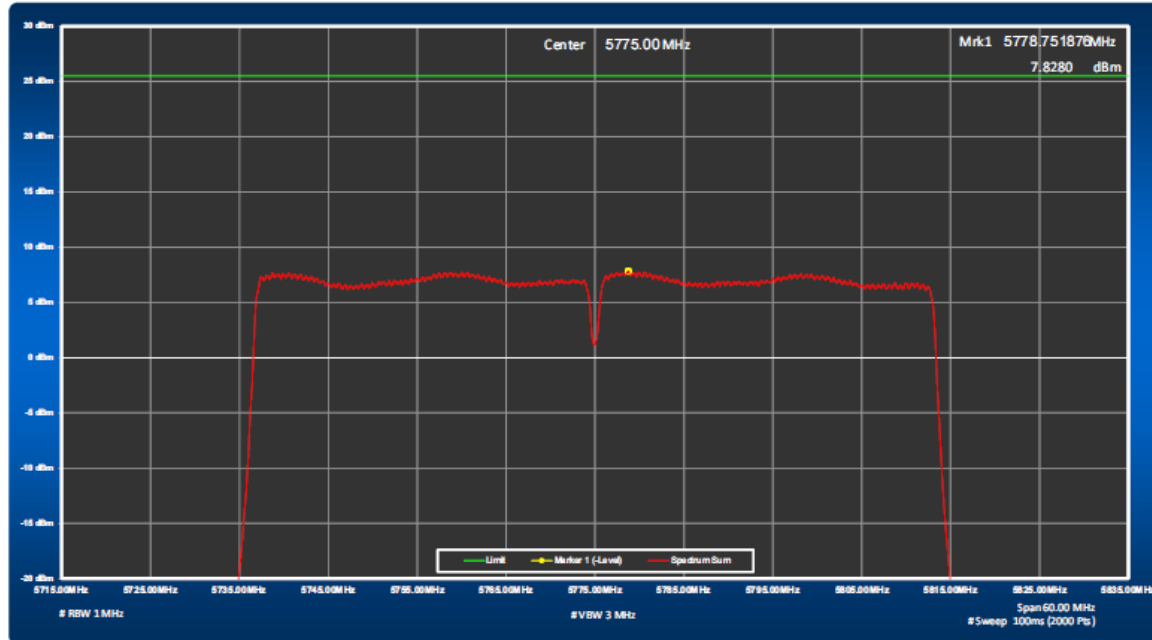

**Figure 27:** Peak Power Spectral Density, 5775 MHz at 802.11n AC, VHT 80 mode

## **Transmitter Spurious Emissions**

*Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmit mode; per requirement of CFR47 15.205, 15.209, 15.407(b).*

### **4.3.3 Test Methodology**

#### **4.3.3.1 Preliminary Test**

A test program that controls instrumentation and data logging was used to automate the preliminary RF emission test procedure. The frequency range of interest was divided into sub-ranges to yield a frequency resolution of approximately 120 kHz and provide a reading at each frequency for no more than 12° of turntable rotation. For each frequency sub-range the turntable was rotated 360° while peak emission data was recorded and plotted over the frequency range of interest in horizontal and vertical antenna polarization's.

Preliminary emission profile testing was performed inside the anechoic chamber. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm above the floor. The EUT was positioned as shown in the setup photographs. The receiving antenna was placed at a distance of 3m at a fixed height of 1m. Measurement equipment was located outside of the chamber. A video camera was placed inside the chamber to view the EUT.

Pres-scans were performed to determine the worst axis, data rate/ chains.

#### **4.3.3.2 Final Test**

For each frequency measured, the peak emission was maximized by manipulating the receiving antenna from 1 to 4 meters above the ground plane and placing it at the position that produced the maximum signal strength reading. The turntable was then rotated through 360° while observing the peak signal and placing the EUT at the position that produced maximum radiation. The six highest emissions relative to the limit were measured unless such emissions were more than 20 dB below the limit. If less than six emissions are within 20 dB of the limit, than the noise level of the receiver is measured at frequencies where emissions are expected. Multiples of all oscillator and microprocessor frequencies were also checked.

Final testing was performed on an NSA compliant test site. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane. The placement of EUT and cables were the same as for preliminary testing and is shown in the setup photographs.

The final scans performed on the worst axis, X-Axis, for three operating channels;

6.0 Mbits/s for 802.11a 5745, 5785 and 5825MHz

6.5 Mbit/s for 802.11n HT20/VHT20 Mode: 5745, 5785 and 5825MHz

13.5 Mbit/s for 802.11n HT40/VHT20 Mode: 5755 and 5795MHz

56.5Mbits/s for 802.11nAC VHT80 Mode 5775MHz

**4.3.3.3 Deviations**

None.

**4.3.4 Transmitter Spurious Emission Limit**

The spurious emissions of the transmitter shall not exceed the values in CFR47 Part 15.205, 15.209: 2009 and RSS-247 6.2.4 (2)

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F (kHz)	300
0.490-1.705	24000/F (kHz)	30
1.705-30.0	30	30
30-88	100 **	3
88-216	150 **	3
216-960	200 **	3
Above 960	500	3

According to CFR47 15.407 (b), For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz. This is equivalent to 78.2dBuV/m and 68.2dBuV/m at 3 meter distance.

**4.3.5 Test Results**


The final measurement data was taken under the worst case operating modes, configurations, and/or cable positions. It also reflects the results including any modifications and/or special accessories listed in Sections 1.4 and test plan.

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

**Table 6: Transmit Spurious Emission at Band-Edge Requirements**


<b>Test Conditions:</b> Radiated Measurement, Normal Temperature and Voltage only								
<b>Antenna Type:</b> External: Unit APIN0324					<b>Power Setting:</b> See test plan			
<b>Max. Directional Gain:</b>					<b>Signal State:</b> Modulated at 100%.			
<b>Ambient Temp.:</b> 23° C					<b>Relative Humidity:</b> 33%			
<b>Band-Edge Results</b>								
Freq. (MHz)	Level (dBuV/m)	Polarity (H/V)	Limit (dBuV/m)	Margin (dB)	Det.	Table (deg)	Ant Ht (mts)	Note
5715.68	67.28	V	68.2	-0.92	Pk	125	144	11a TX 5745 PS17 Band Crossing
5713.68	67.99	V	68.2	-0.21	Pk	28	190	HT20 5745 PS17 Band crossing
5704.66	67.41	V	68.2	-0.79	Pk	167	173	HT40 5755 PS16 Band crossing
5711.27	66.40	V	68.2	-1.80	Pk	167	173	HT80 5775 PS9 Band crossing
<p><b>Note:</b> 1. Complies with the -27dBm/MHz (68.2dBuV/m at 3m) requirements as stated in CFR47 15.407 (b) (1) to 15.407 (b) (3) at Band edge Freq. 5725MHz.</p> <p>3. Both antenna polarizations were evaluated vertical antenna polarization with higher emissions is reported here.</p> <p>2. Both devices were tested worst case results with unit high gain External antennas APIN0324 are reported here.</p>								



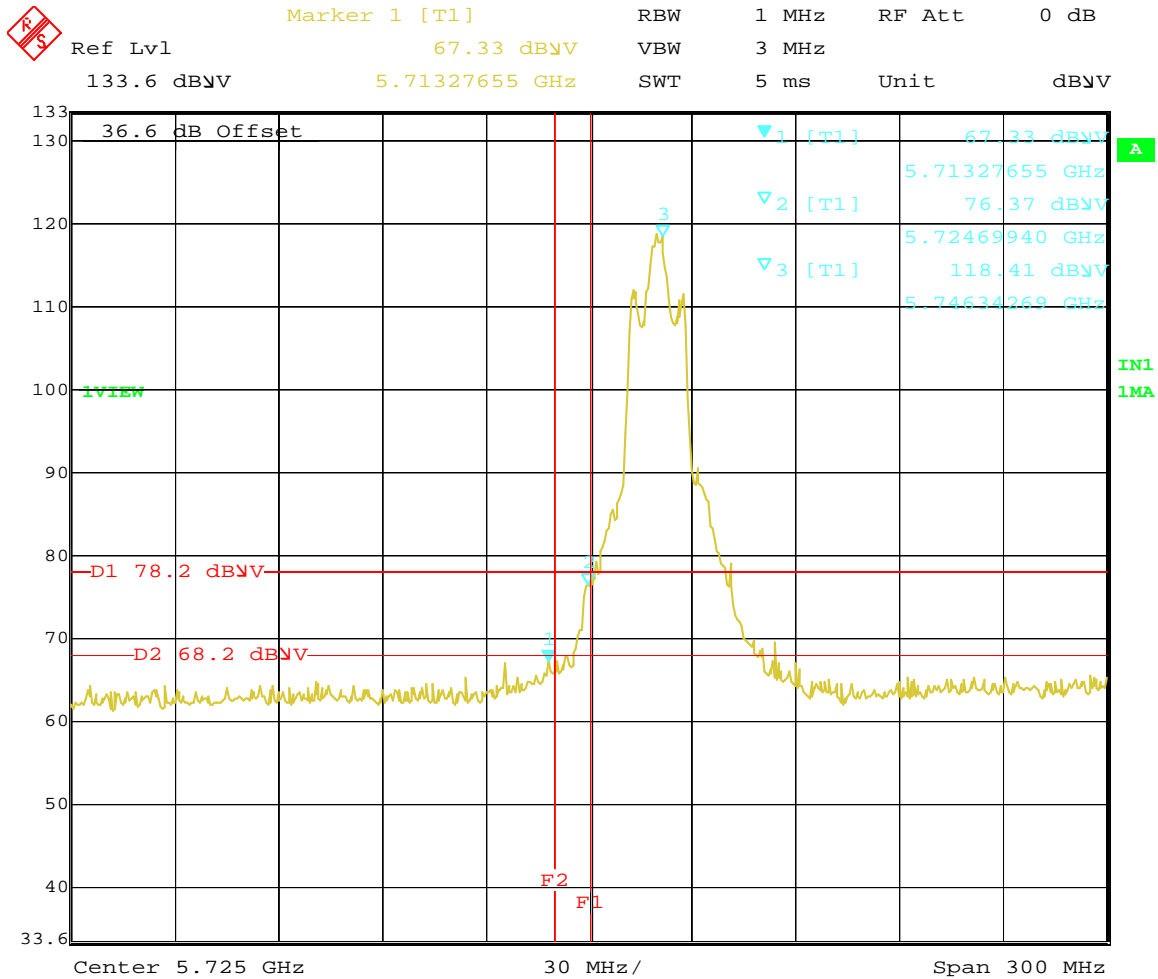


Date: 24.APR.2015 13:00:14

**Figure 28:** Radiated Emission at the band crossing for Channel 5745 MHz at 6.0Mbps – Vert (Peak)

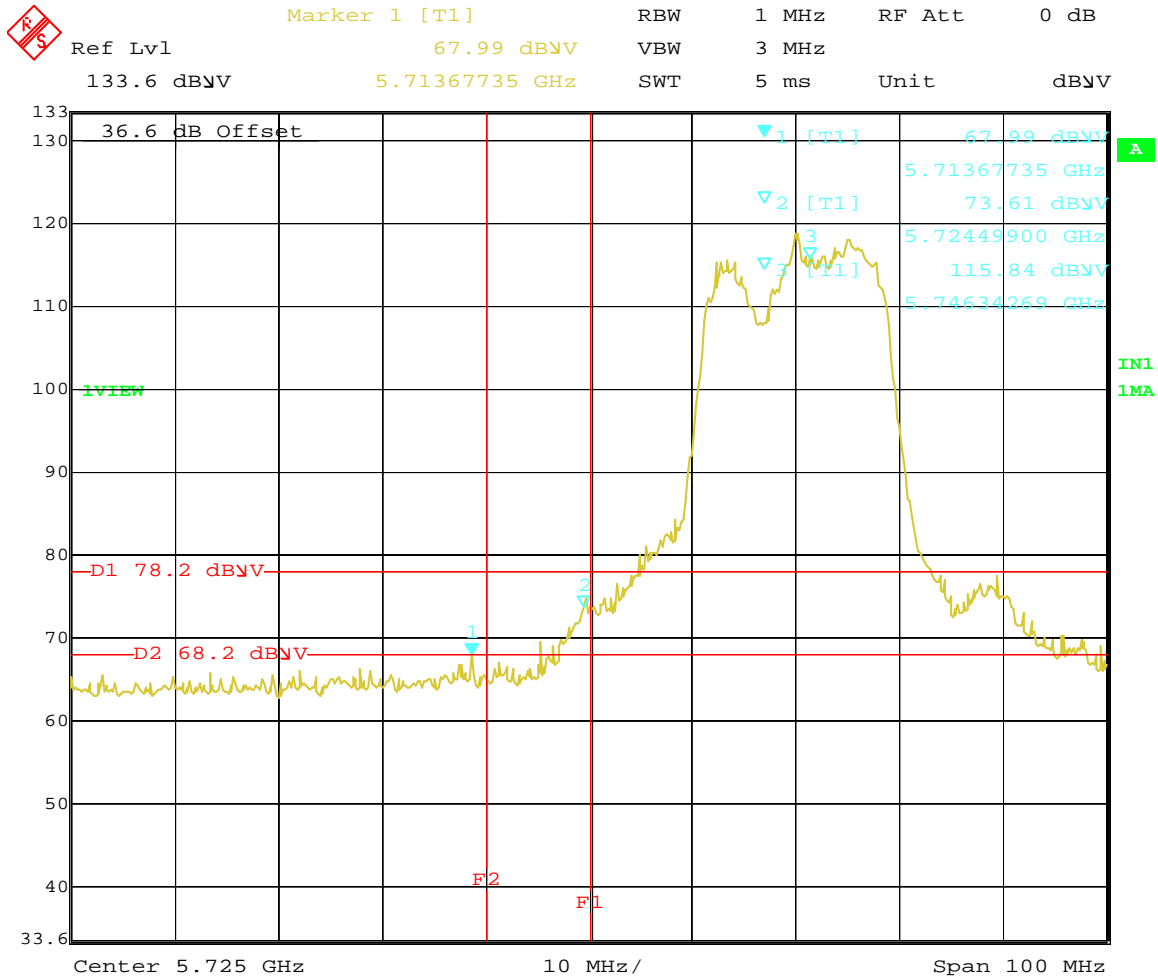


Date: 24.APR.2015 13:11:55

**Figure 29:** Radiated Emission at the Band Crossing for Channel 5745 MHz at HT20 6.5Mbps – Vert. (Ave.)

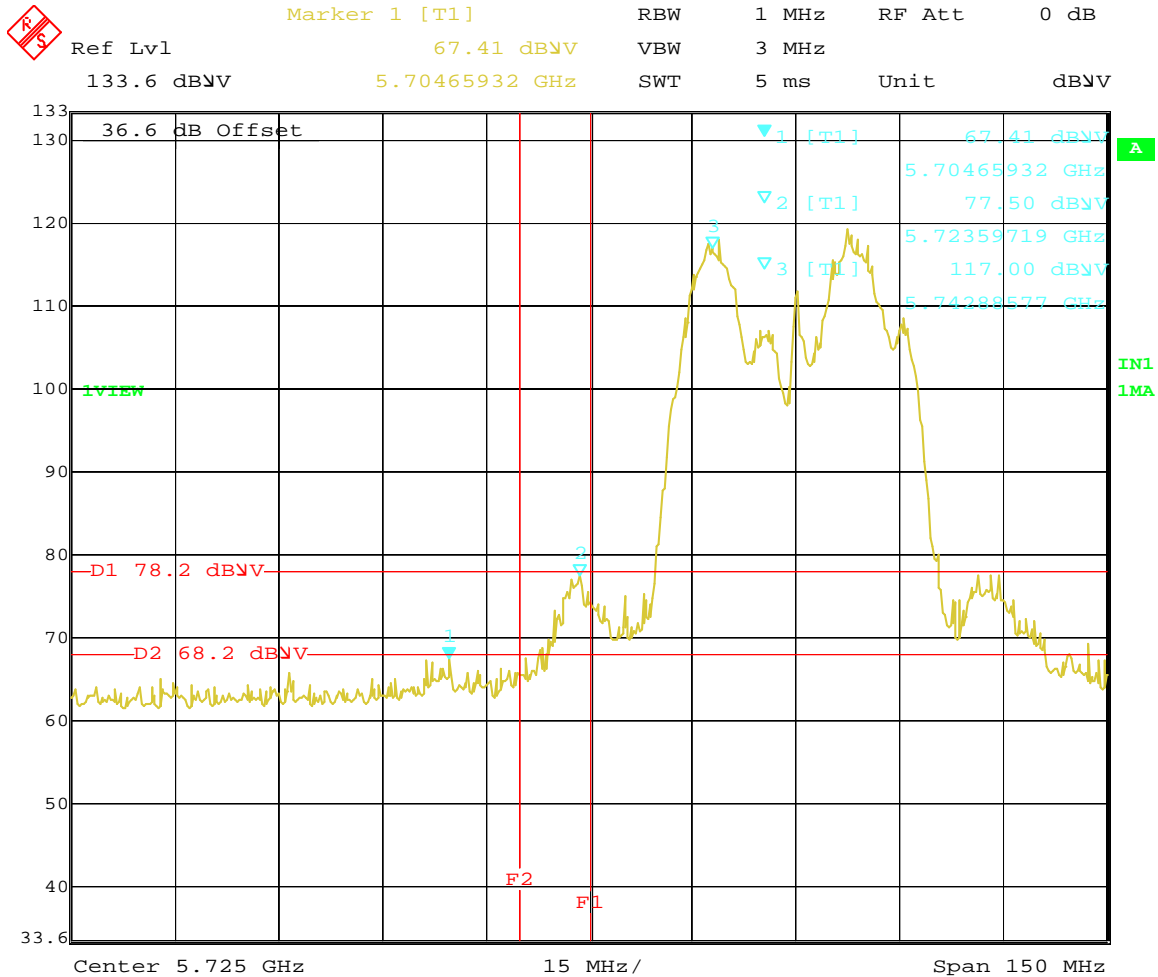

Date: 24.APR.2015 13:37:44

**Figure 30:** Radiated Emission at the band crossing for TX 5755Hz at HT40 at 13.5.5Mbps– Vert. (Peak)

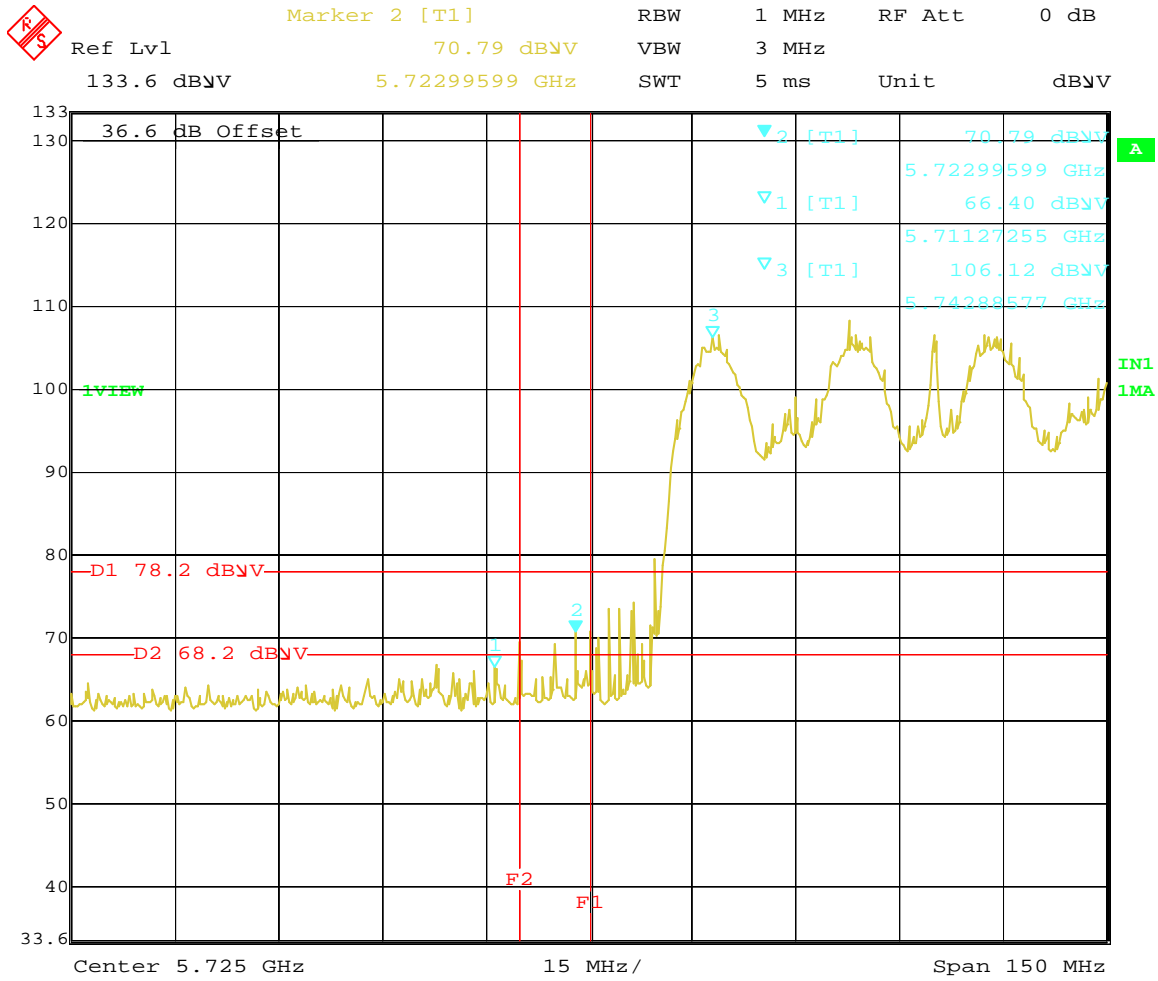

Date: 24.APR.2015 13:50:18

**Figure 31:** Radiated Emission at Band Crossing for TX 5775MHz at VHT80- Vert. (Pk.)

**Radiated Emissions**

<b>SOP 1 Radiated Emissions</b>				Tracking # 31560848.001 Page 1 of 32			
<b>EUT Name</b>	Wireless Access Point			<b>Date</b>	Apr 10, 2015		
<b>EUT Model</b>	APIN0324 and APIN0325			<b>Temp / Hum in</b>	23° C / 28%rh		
<b>EUT Serial</b>	DD0000401 Internal antenna unit			<b>Temp / Hum out</b>	N/A		
<b>EUT Config.</b>	X-Axis, 802.11a mode at 6.0 Mbps/ chain			<b>Line AC / Freq</b>	120Vac/60Hz		
<b>Standard</b>	CFR47 Part 15 Subpart C			<b>RBW / VBW</b>	120 kHz/ 300 kHz		
<b>Dist/Ant Used</b>	3m / JB3			<b>Performed by</b>	Suresh Kondapalli		

30 MHz to 1 GHz Transmitted at 802.11a MHz 6Mbps/chain TX On 5745-5825MHz Band

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin	
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB	
832.85	23.12	5.59	-10.91	17.81	QP	H	282	202	46.00	-28.19	Pass
52.54	53.33	2.80	-24.67	31.45	QP	V	207	137	40.00	-8.55	Pass
76.56	49.28	2.98	-24.65	27.61	QP	V	135	189	40.00	-12.39	Pass
224.04	46.70	3.73	-21.21	29.22	QP	V	126	118	46.00	-16.78	Pass
235.65	48.23	3.78	-20.78	31.24	QP	V	164	19	46.00	-14.76	Pass
247.21	51.45	3.83	-20.69	34.59	QP	V	113	194	46.00	-11.41	Pass

1 to 18 GHz Transmitted at 802.11a MHz 6Mbps/chain TX On 5745

5279.60	39.43	1.92	-15.83	25.52	Avg	V	147	206	54	-28.48	Pass
11490.54	59.43	2.84	-11.21	51.06	Avg	V	192	214	54	-2.94	Pass
17241.47	38.4	3.69	-4.02	38.07	Avg	V	196	242	54	-15.93	Pass
17254.5	35.82	3.7	-3.84	35.69	Avg	V	219	354	54	-18.31	Pass

1 to 18 GHz Transmitted at 802.11a MHz 6Mbps/chain TX On 5785MHz

17352.92	37.36	3.73	-3.7	37.4	Avg	V	246	14	54	-16.61	Pass
17758.06	36.62	3.9	-0.15	40.37	Avg	H	216	257	54	-13.63	Pass
11570.31	59.66	2.86	-11.29	51.22	Avg	V	165	363	54	-2.78	Pass

1 to 18 GHz Transmitted at 802.11a MHz 6Mbps/chain TX On 5825MHz


11650.96	61.22	2.89	-11.26	52.85	Avg	V	201	252	54	-1.15	Pass
17748.48	36.77	3.89	0	40.66	Avg	H	225	248	54	-13.34	Pass

Spec Margin = E-Field QP - Limit, E-Field QP = FIM QP+ Total CF ± Uncertainty  
 Total CF= AF+ Cable Loss AF= Antenna factor + Preamp

**SOP 1 Radiated Emissions**

Tracking # 31560848.001 Page 2 of 32

<b>EUT Name</b>	Wireless Access Point	<b>Date</b>	Apr 13, 2015
<b>EUT Model</b>	APIN0324 and APIN0325	<b>Temp / Hum in</b>	23° C / 33%rh
<b>EUT Serial</b>	DD0000401	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	X-Axis, 802.11a at 6.0 Mbps	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	1 MHz / 3 MHz
<b>Dist/Ant Used</b>	3m - EMCO3115 / 1m - RA42-K-F-4B-C	<b>Performed by</b>	Suresh K

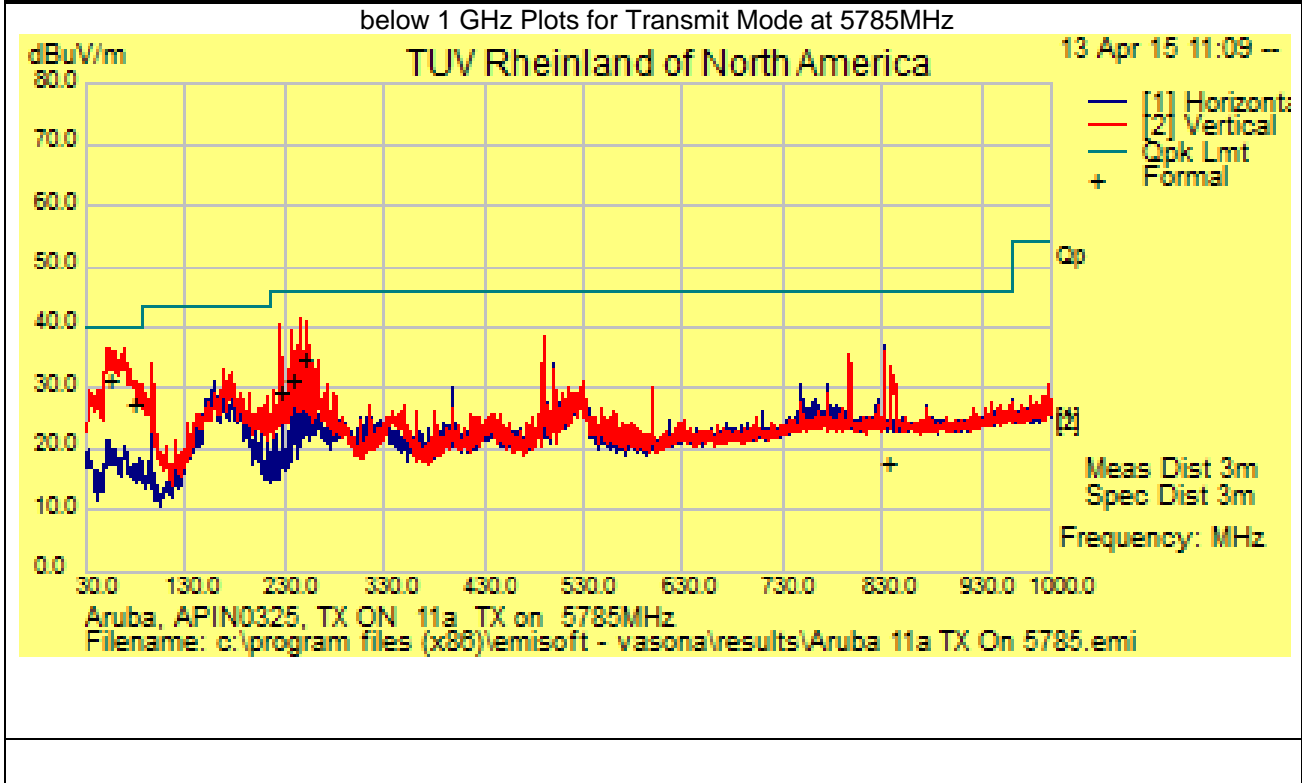


**SOP 1 Radiated Emissions**


Tracking # 31560848.001 Page 3 of 32

<b>EUT Name</b>	Wireless Access Point	<b>Date</b>	May 18, 2015
<b>EUT Model</b>	APIN0324 and APIN0325	<b>Temp / Hum in</b>	23° C / 33%rh
<b>EUT Serial</b>	DD0000401	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	X-Axis, 802.11a at 6.0 Mbps	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	1 MHz / 3 MHz
<b>Dist/Ant Used</b>	3m - EMCO3115 / 1m - RA42-K-F-4B-C	<b>Performed by</b>	Suresh K

1-18 GHz Plots for Transmit Mode 11a at 5745 MHz

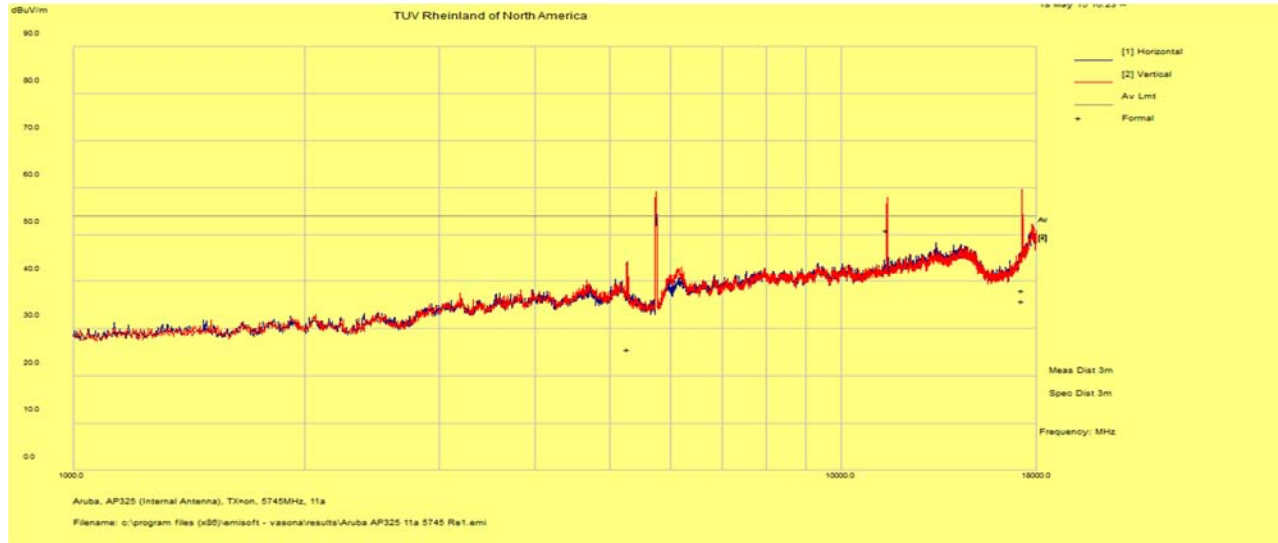

1-18 GHz Plots for Transmit Mode 11a at 5785 MHz

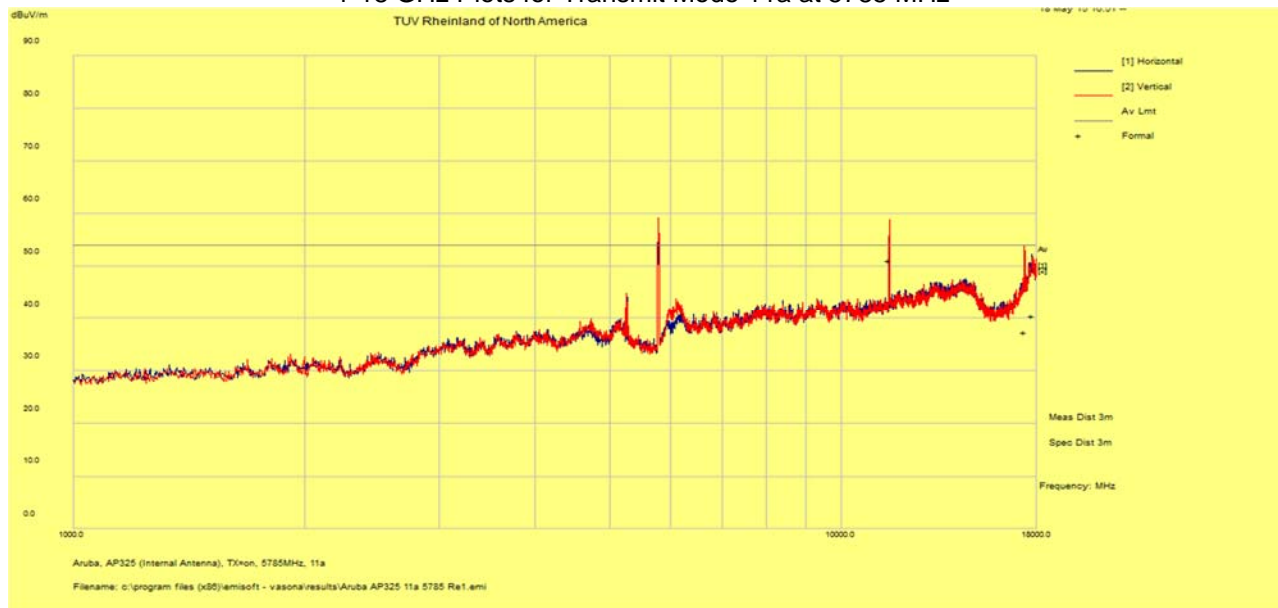


Notes:

**SOP 1 Radiated Emissions**

Tracking # 31560848.001 Page 4 of 32

<b>EUT Name</b>	Wireless Access Point	<b>Date</b>	Apr 16, 2015
<b>EUT Model</b>	APIN0324 and APIN0325	<b>Temp / Hum in</b>	23° C / 33%rh
<b>EUT Serial</b>	DD0000409	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	X-Axis, 802.11a at 6.0 Mbps	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	1 MHz / 3 MHz
<b>Dist/Ant Used</b>	3m - EMCO3115 / 1m - RA42-K-F-4B-C	<b>Performed by</b>	Suresh K

1-18 GHz Plots for Transmit Mode 11a at 5825 MHz

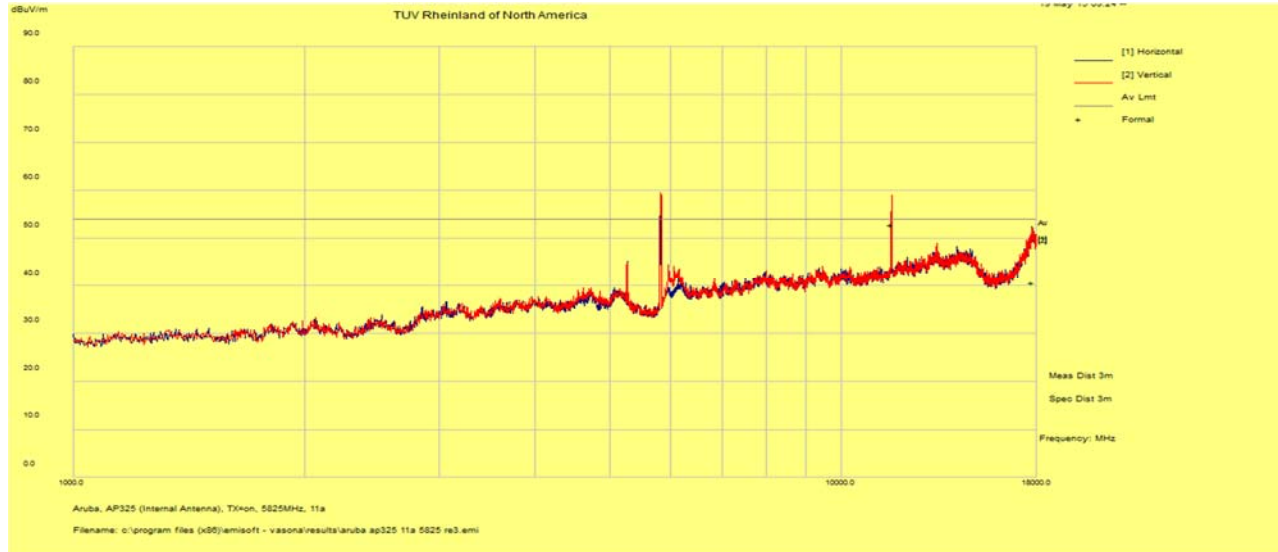

Notes




**SOP 1 Radiated Emissions**


Tracking # 31560848.001 Page 5 of 32

<b>EUT Name</b>	Wireless Access Point	<b>Date</b>	Apr 16, 2015
<b>EUT Model</b>	APIN0324 and APIN0325	<b>Temp / Hum in</b>	23° C / 33%rh
<b>EUT Serial</b>	DD0000409	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	X-Axis, 802.11a at 6.0 Mbps	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	1 MHz / 3 MHz
<b>Dist/Ant Used</b>	3m - EMCO3115 / 1m - RA42-K-F-4B-C	<b>Performed by</b>	GAJ

18-26 GHz Plots for Transmit Mode 11a at 5785 MHz

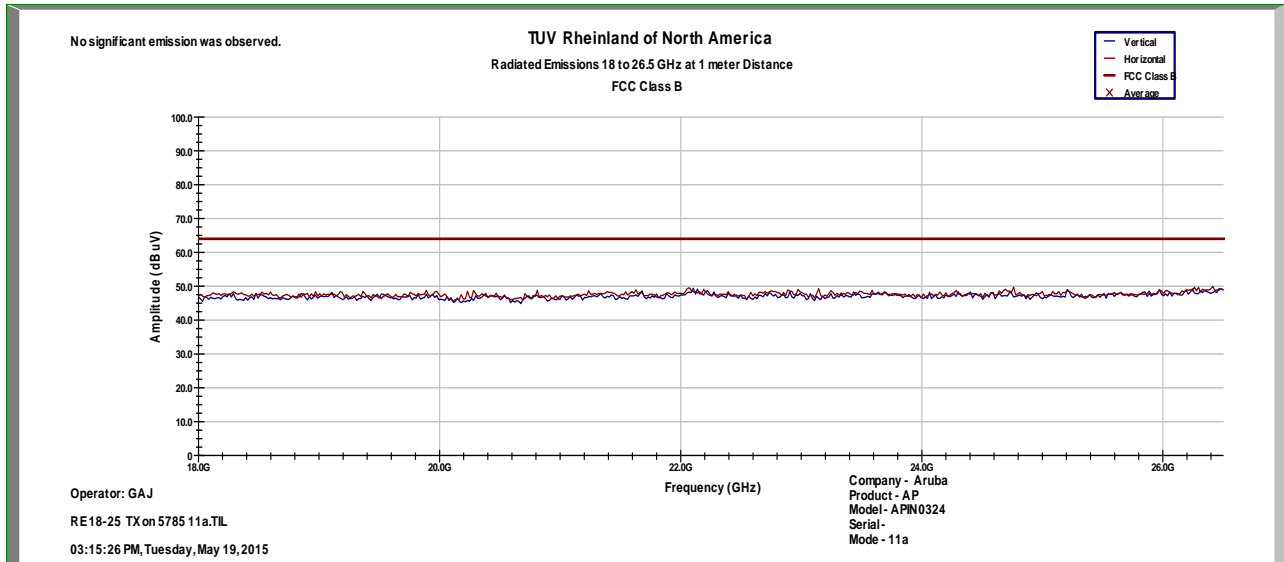

26-40 GHz Plots for Transmit Mode 11a at 5785 MHz

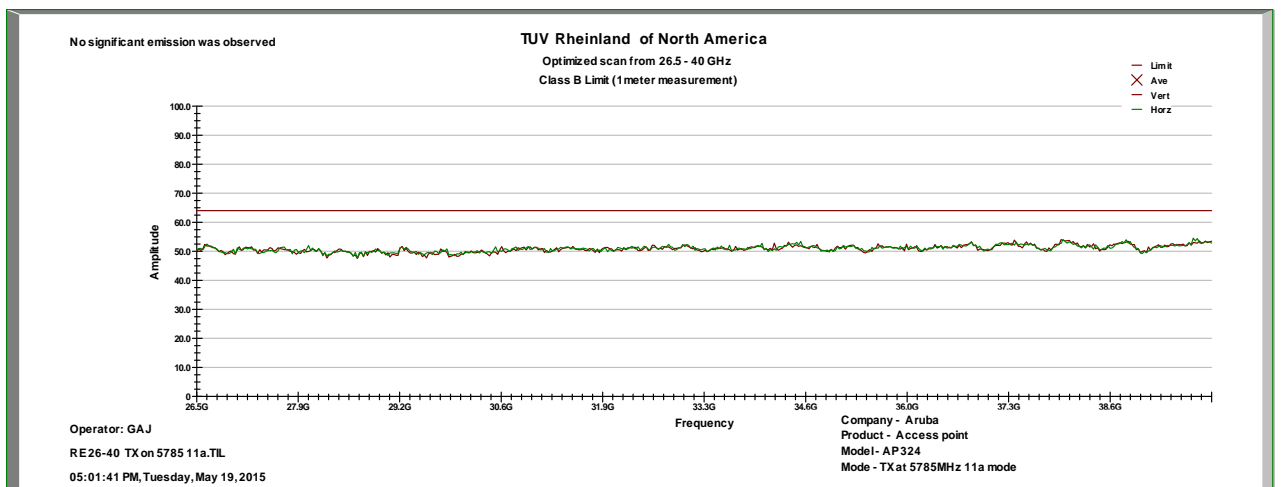

Note: Low, mid and High channels were evaluated. Mid channel emission plots for 26 to 40GHz are presented here.

<b>SOP 1 Radiated Emissions</b>		Tracking # 31560848.001 Page 6 of 25	
<b>EUT Name</b>	Wireless Access Point	<b>Date</b>	May 01, 2015
<b>EUT Model</b>	APIN0324 and APIN0325	<b>Temp / Hum in</b>	23° C / 28%rh
<b>EUT Serial</b>	DD000409	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	X-Axis, 802.11n mode HT20 at 6.0 Mbps/ chain	<b>Line AC / Freq</b>	120Vac/60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	120 kHz/ 300 kHz
<b>Dist/Ant Used</b>	3m / JB3	<b>Performed by</b>	Suresh Kondapalli

1 to 18 GHz Transmitted at 802.11 HT20 6.5Mbps/chain TX On 5745, 5785 and 5825Mhz

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin	
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB	
17857.12	36.43	3.99	-0.49	39.93	Avg	V	164	196	54	-14.07	Pass
17352.57	41.79	3.73	-3.7	41.82	Avg	V	132	226	54	-12.19	Pass
11571.82	61.56	2.86	-11.3	53.12	Avg	V	145	234	54	-0.88	Pass
17368.58	39.38	3.73	-3.67	39.44	Avg	V	163	344	54	-14.56	Pass
11645.44	60.74	2.89	-11.25	52.38	Avg	V	145	234	54	-1.62	Pass
11493.12	59.5	2.84	-11.21	51.13	Avg	V	145	233	54	-2.87	Pass


Spec Margin = E-Field QP - Limit, E-Field QP = FIM QP+ Total CF ± Uncertainty  
 Total CF= AF+ Cable Loss AF= Antenna factor + Preamp

**SOP 1 Radiated Emissions**


Tracking # 31560848.001 Page 7 of 32

<b>EUT Name</b>	Wireless Access Point	<b>Date</b>	May 19, 2015
<b>EUT Model</b>	APIN0324 and APIN0325	<b>Temp / Hum in</b>	23° C / 28%rh
<b>EUT Serial</b>	DD000409	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	X-Axis, 802.11n HT20 at 6.5 Mbps/ chain	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	120 kHz / 300 kHz
<b>Dist/Ant Used</b>	3m – JB3	<b>Performed by</b>	Suresh K

Transmitted at 802.11n HT20, 5200 MHz 6.5 Mbps/chain

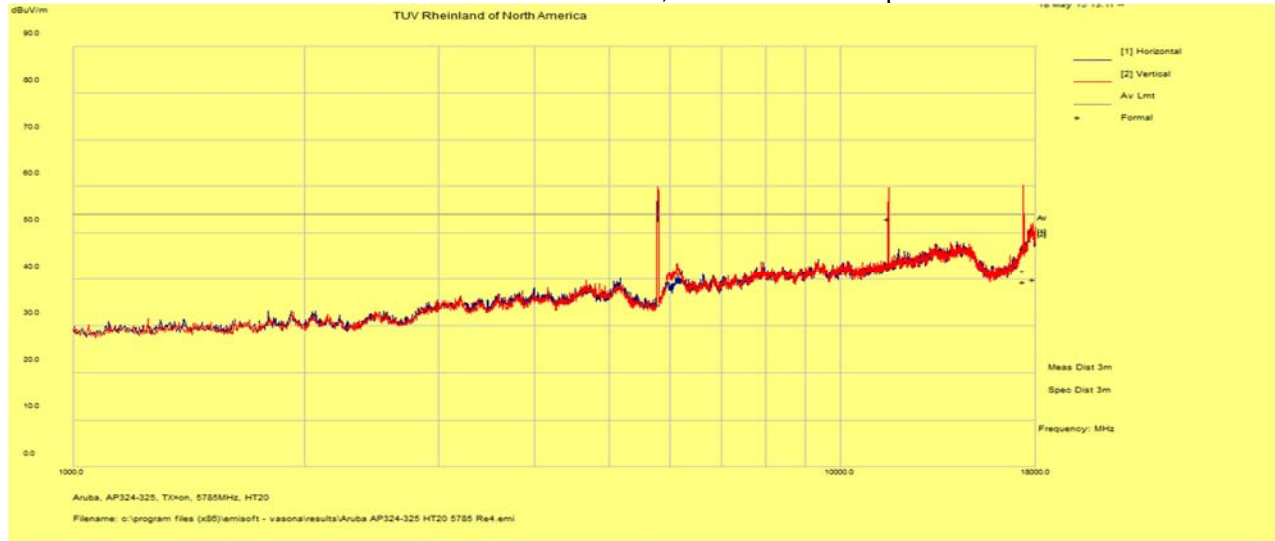

Transmitted at 802.11n HT20, 5200 MHz 6.5 Mbps/chain 18 to 26GHz

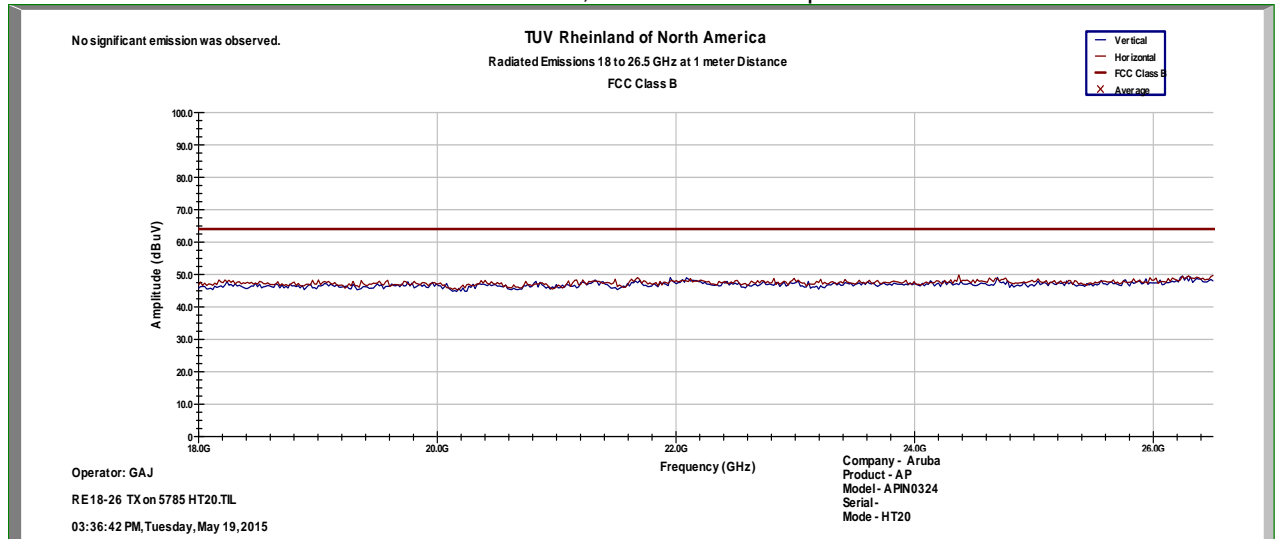


Notes:

**SOP 1 Radiated Emissions**

Tracking # 31560848.001 Page 8 of 32

<b>EUT Name</b>	Wireless Access Point	<b>Date</b>	Apr 16, 2015
<b>EUT Model</b>	APIN0324 and APIN0325	<b>Temp / Hum in</b>	23° C / 28%rh
<b>EUT Serial</b>	DD000409	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	X-Axis, 802.11n HT20 at 6.5 Mbps/ chain	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	120 kHz / 300 kHz
<b>Dist/Ant Used</b>	3m – JB3	<b>Performed by</b>	Suresh K

Transmitted at 802.11n HT20, 5875 MHz 6.5 Mbps/chain  
 26 to 40GHz

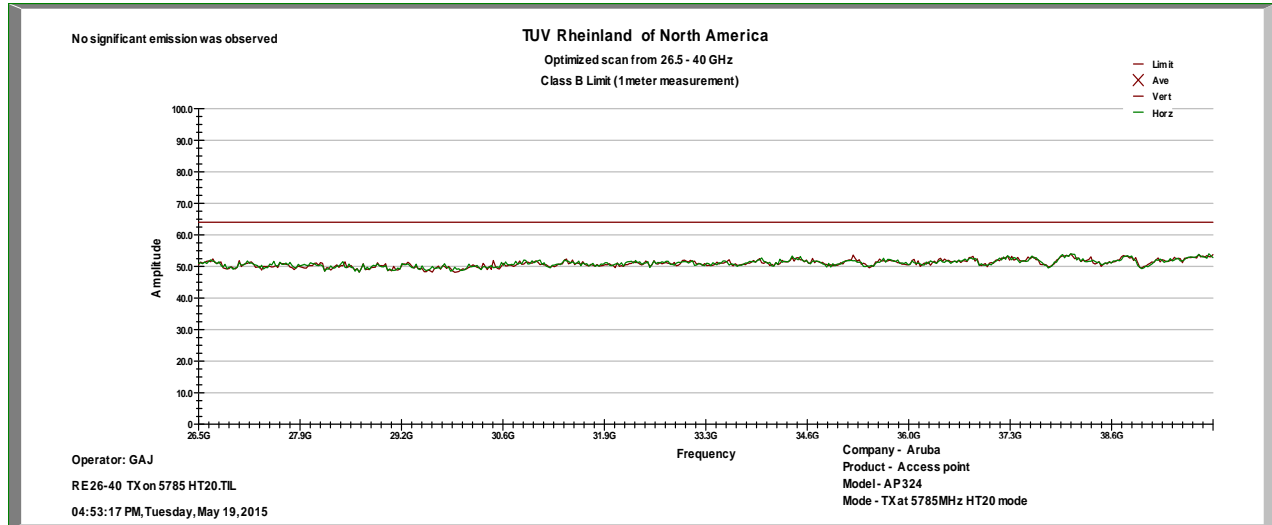

Notes:

<b>SOP 1 Radiated Emissions</b>						Tracking # 31560848.001 Page 9 of 32					
<b>EUT Name</b>			Wireless Access Point			<b>Date</b>			Apr 10, 2015		
<b>EUT Model</b>			APIN0324 and APIN0325			<b>Temp / Hum in</b>			23° C / 28%rh		
<b>EUT Serial</b>			DD0000409			<b>Temp / Hum out</b>			N/A		
<b>EUT Config.</b>			X-Axis, 802.11 HT40mode at 13.5 Mbps/ chain			<b>Line AC / Freq</b>			120Vac/60Hz		
<b>Standard</b>			CFR47 Part 15 Subpart C			<b>RBW / VBW</b>			120 kHz/ 300 kHz		
<b>Dist/Ant Used</b>			3m / JB3			<b>Performed by</b>			Suresh Kondapalli		

30 -1000 MHz Transmitted at 802.11 HT40 11Mbps/chain TX On 5755, 5795,

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin	
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB	
67.50	47.94	2.91	-24.60	26.25	QP	V	147	176	40.00	-13.75	Pass
74.62	45.96	2.96	-24.51	24.40	QP	V	106	204	40.00	-15.60	Pass
206.54	39.02	3.66	-21.05	21.63	QP	V	123	120	43.50	-21.87	Pass
241.51	42.36	3.81	-20.69	25.48	QP	V	258	272	46.00	-20.52	Pass
253.22	48.79	3.85	-20.63	32.01	QP	V	139	65	46.00	-13.99	Pass
491.90	23.77	4.66	-14.85	13.58	QP	V	234	104	46.00	-32.42	Pass

1 -18GHz Transmitted at 802.11 HT40 11Mbps/chain TX On 5755, 5795

17262.7	36.42	3.71	-3.97	36.15	Avg	V	200	72	54	-17.85	Pass
17250.88	37.32	3.7	-3.78	37.24	Avg	V	214	136	54	-16.76	Pass
11509.97	58.23	2.84	-11.24	49.83	Avg	V	204	215	54	-4.17	Pass
11586.8	57.74	2.86	-11.28	49.32	Avg	V	123	66	54	-4.68	Pass
17809.29	37.04	3.94	-0.65	40.34	Avg	H	206	66	54	-13.67	Pass


Spec Margin = E-Field QP - Limit, E-Field QP = FIM QP+ Total CF ± Uncertainty  
 Total CF= AF+ Cable Loss AF= Antenna factor + Preamp

**SOP 1 Radiated Emissions**


Tracking # 31560848.001 Page 10 of 32

<b>EUT Name</b>	Wireless Access Point	<b>Date</b>	April 10 & May01, 2015
<b>EUT Model</b>	APIN0324 and APIN0325	<b>Temp / Hum in</b>	23° C / 33%rh
<b>EUT Serial</b>	DD0000409	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	X-Axis, 802.11n HT40/ VHT40 at 13.5Mbps	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	1 MHz / 3 MHz
<b>Dist/Ant Used</b>	3m - EMCO3115 / 1m - RA42-K-F-4B-C	<b>Performed by</b>	GAJ

30 to 1000MHz Plots for HT40/VHT40 Transmit Mode at 5755 MHz

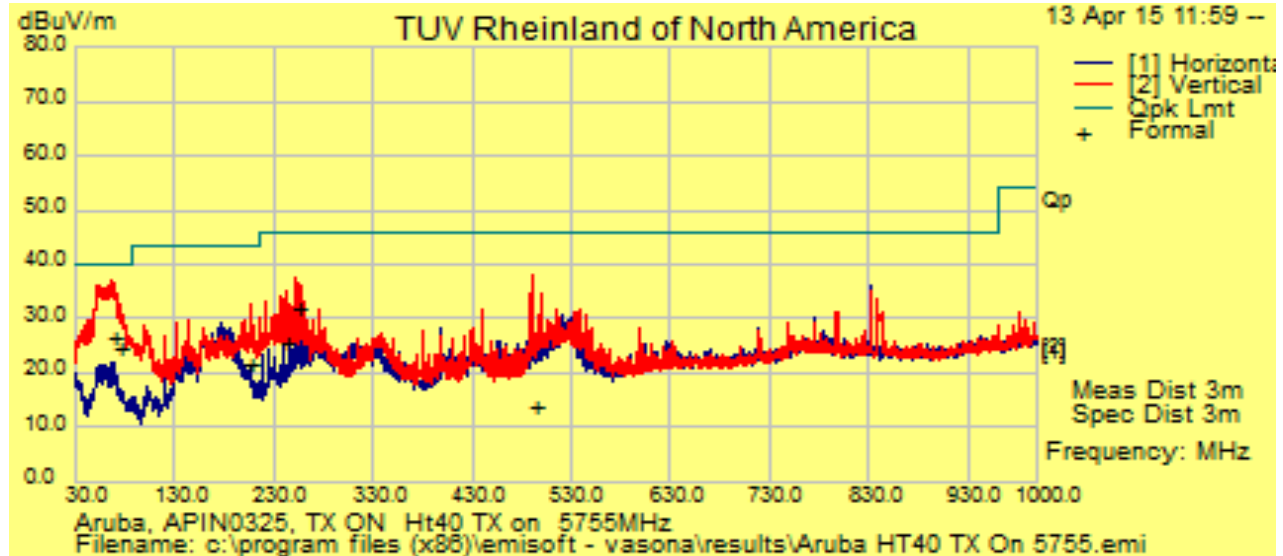

1 to 18GHz Plots for HT40/VHT40 Transmit Mode at 5755MHz

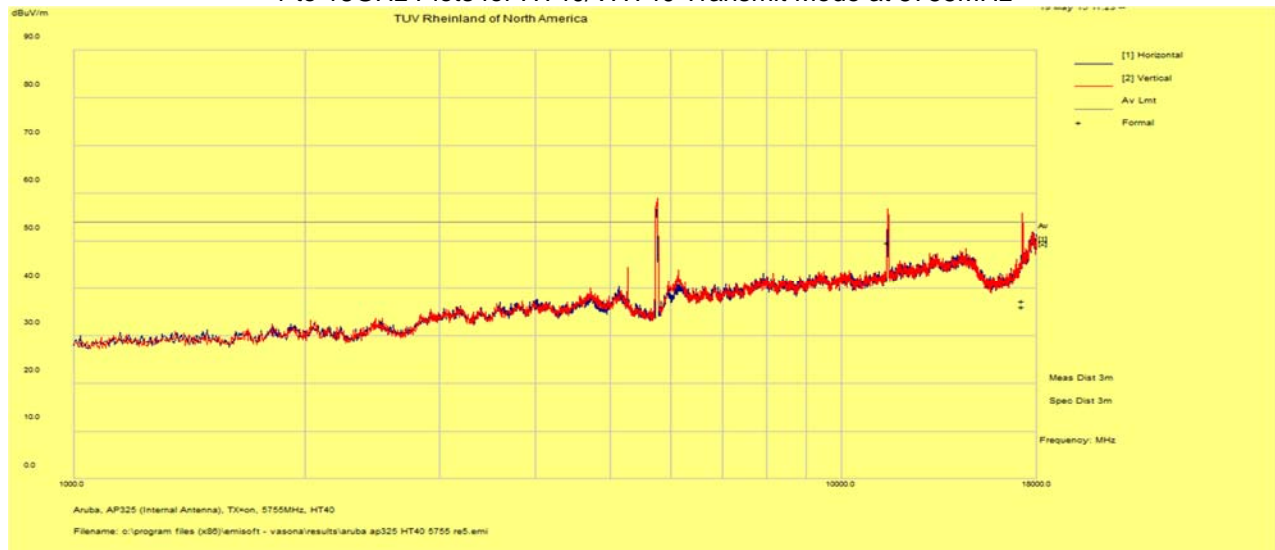


Notes:

**SOP 1 Radiated Emissions**


Tracking # 31560848.001 Page 11 of 32

<b>EUT Name</b>	Wireless Access Point	<b>Date</b>	May 18, 2015
<b>EUT Model</b>	APIN0324 and APIN0325	<b>Temp / Hum in</b>	23° C / 33%rh
<b>EUT Serial</b>	DD0000409	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	X-Axis, 802.11n HT40/VHT40 at 11Mbps	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	1 MHz / 3 MHz
<b>Dist/Ant Used</b>	1m - RA42-K-F-4B-C	<b>Performed by</b>	Gary

1 to 18 GHz Plots for HT/VHT40 Transmit Mode HT40 5795MHz

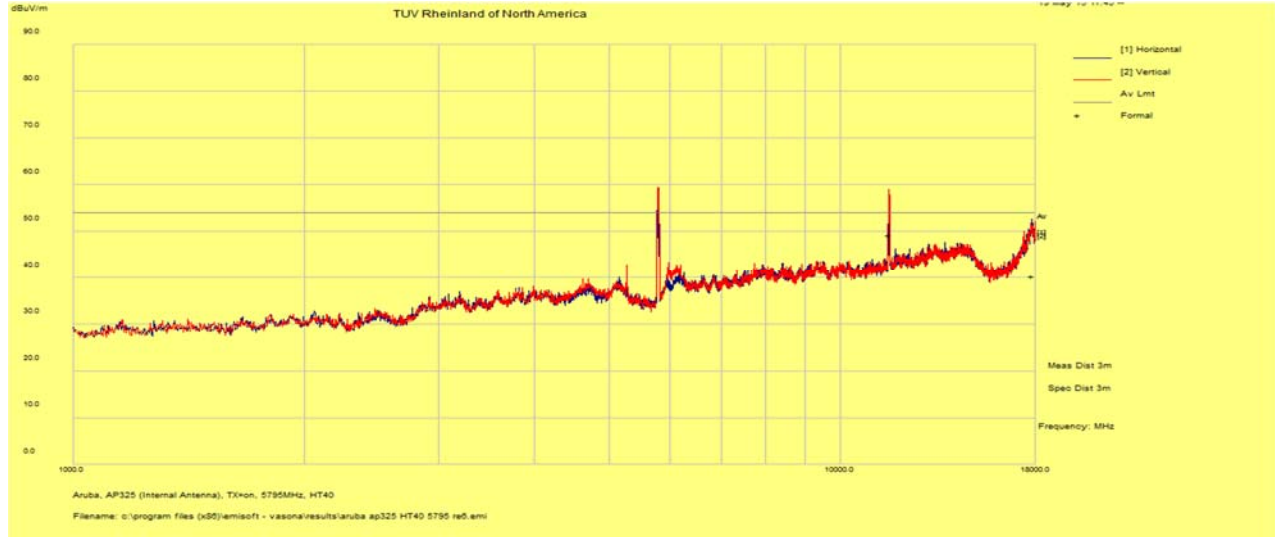

18 to 26 GHz Plots for HT/VHT40 Transmit Mode HT40 5795MHz

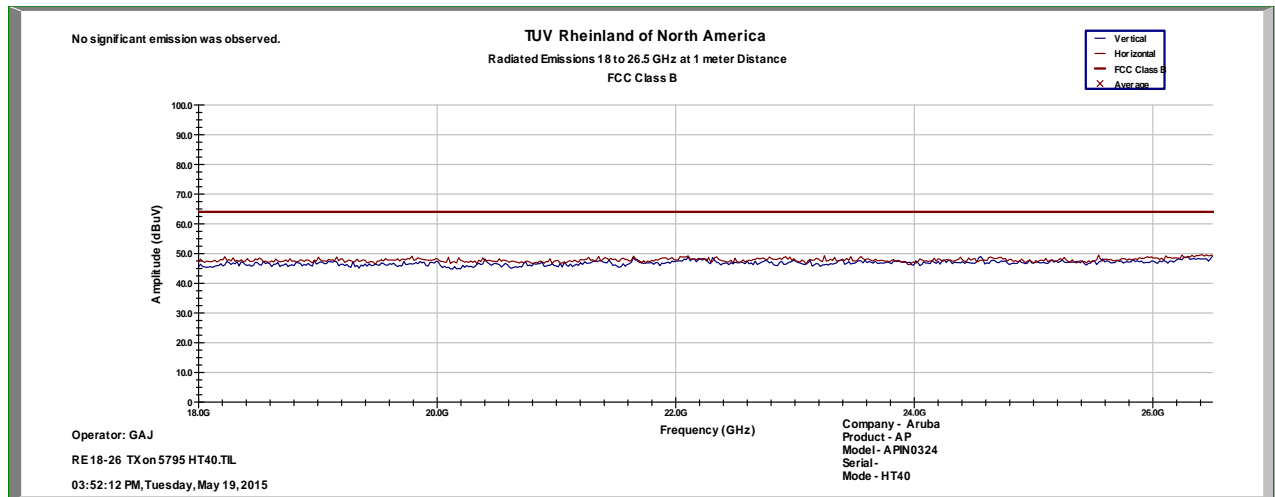


Notes: Limit was extrapolated to 1m distance for 18 GHz – 40 GHz range.

**SOP 1 Radiated Emissions**

Tracking # 31560848.001 Page 12 of 32

<b>EUT Name</b>	Wireless Access Point	<b>Date</b>	May 18, 2015
<b>EUT Model</b>	APIN0324 and APIN0325	<b>Temp / Hum in</b>	23° C / 33%rh
<b>EUT Serial</b>	DD0000409	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	X-Axis, 802.11n HT40/VHT40 at 11Mbps	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	1 MHz / 3 MHz
<b>Dist/Ant Used</b>	1m - RA42-K-F-4B-C	<b>Performed by</b>	Gary

26 to 40 GHz Plots for HT/VHT40 Transmit Mode HT40 5795MHZ

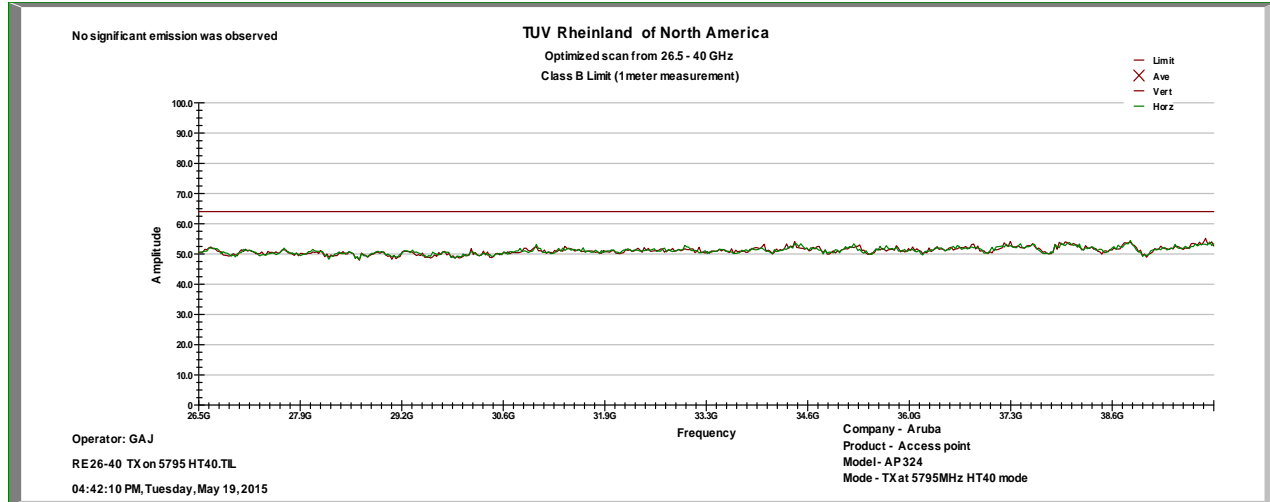

Notes: Limit was extrapolated to 1m distance for 18 GHz – 40 GHz range.



<b>SOP 1 Radiated Emissions</b>						Tracking # 31560848.001 Page 13 of 32					
<b>EUT Name</b>	Wireless Access Point					<b>Date</b>	Apr 13, 2015				
<b>EUT Model</b>	APIN0324 and APIN0325					<b>Temp / Hum in</b>	23° C / 28%rh				
<b>EUT Serial</b>	DD0000409					<b>Temp / Hum out</b>	N/A				
<b>EUT Config.</b>	X-Axis, 802.11 AC VT80					<b>Line AC / Freq</b>	120Vac/60Hz				
<b>Standard</b>	CFR47 Part 15 Subpart C					<b>RBW / VBW</b>	120 kHz/ 300 kHz				
<b>Dist/Ant Used</b>	3m / JB3					<b>Performed by</b>	Suresh Kondapalli				

30 MHz- 1 GHz Transmitted at 802.11AC HT80 TX On 5775

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin	
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB	
68.99	50.02	2.92	-24.49	28.45	QP	V	162	166	40.00	-11.55	Pass
77.20	49.24	2.98	-24.70	27.52	QP	V	131	202	40.00	-12.48	Pass
131.98	41.56	3.30	-18.90	25.96	QP	V	144	100	43.50	-17.55	Pass
235.65	48.08	3.78	-20.78	31.09	QP	V	150	364	46.00	-14.91	Pass
247.40	52.92	3.83	-20.69	36.06	QP	V	103	25	46.00	-9.94	Pass
832.87	22.69	5.59	-10.91	17.37	QP	V	243	38	46.00	-28.63	Pass

1 to 18 GHz Transmitted at 802.11AC HT80 TX On 5775



17743.22	36.65	3.88	-0.21	40.32	Avg	V	151	104	54	-13.69	Pass
11552.64	56.26	2.85	-11.23	47.88	Avg	V	183	212	54	-6.12	Pass
5958.94	47.46	2.05	-15.38	34.13	Avg	V	223	300	54	-19.87	Pass

Spec Margin = E-Field QP - Limit, E-Field QP = FIM QP+ Total CF ± Uncertainty  
 Total CF= AF+ Cable Loss AF= Antenna factor + Preamp

**SOP 1 Radiated Emissions**

Tracking # 31560848.001 Page 14 of 32

<b>EUT Name</b>	Wireless Access Point	<b>Date</b>	Apr 13, 2015
<b>EUT Model</b>	APIN0324 and APIN0325	<b>Temp / Hum in</b>	23° C / 33%rh
<b>EUT Serial</b>	DD0000409	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	X-Axis, 802.11n HT80/VHT80	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	1 MHz / 3 MHz
<b>Dist/Ant Used</b>	1m - RA42-K-F-4B-C	<b>Performed by</b>	Gary

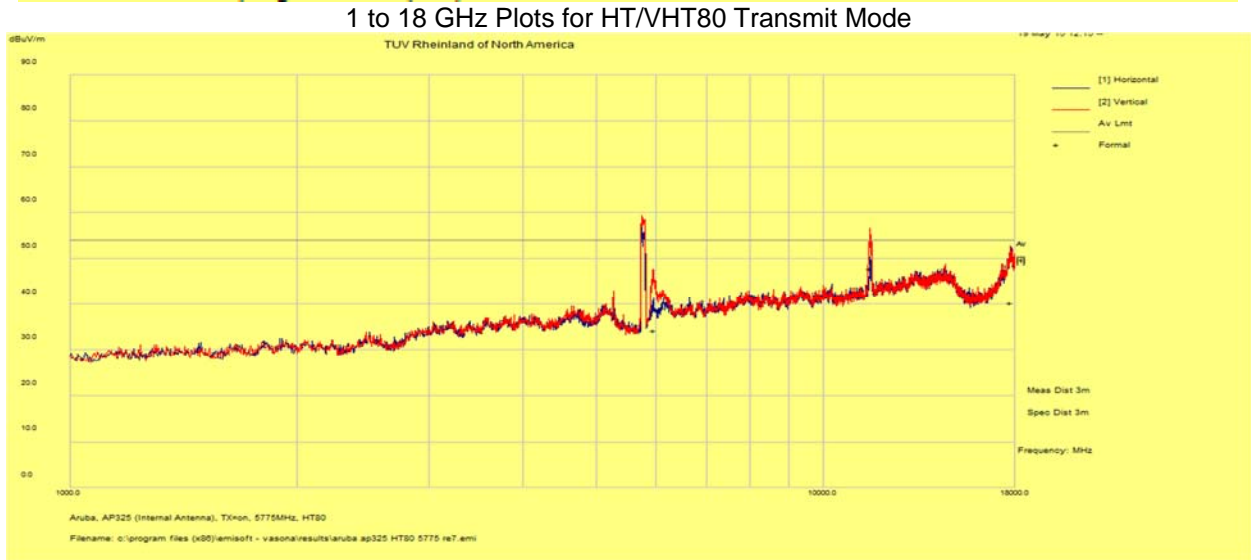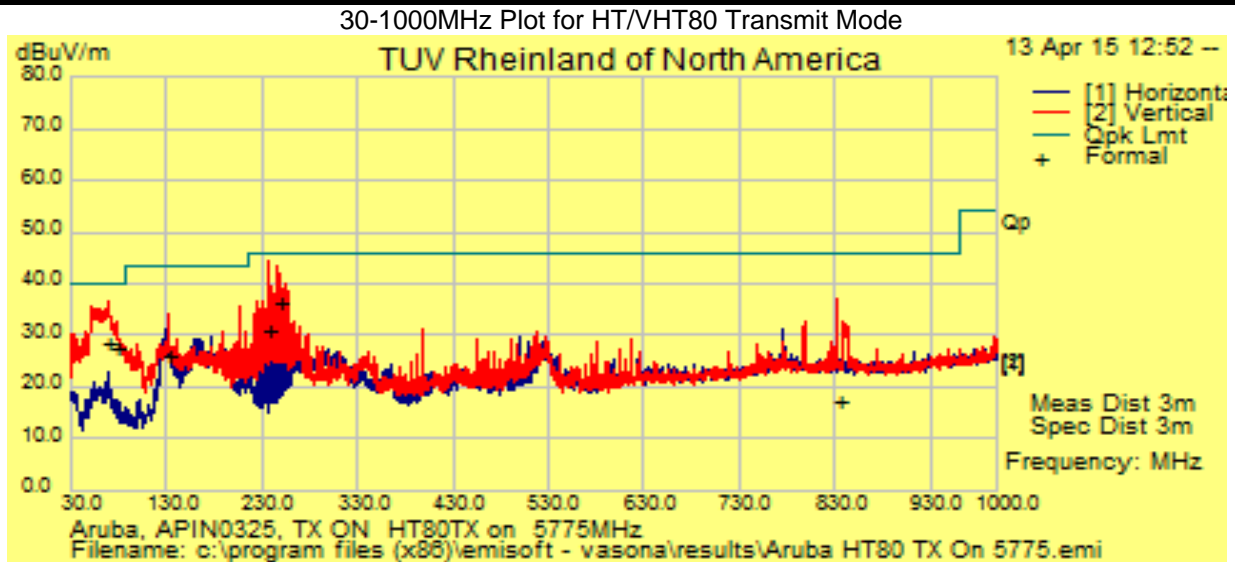


Notes: Limit was extrapolated to 1m distance for 18 GHz – 40 GHz range.

**SOP 1 Radiated Emissions**


Tracking # 31560848.001 Page 15 of 32

<b>EUT Name</b>	Wireless Access Point	<b>Date</b>	May 19, 2015
<b>EUT Model</b>	APIN0324 and APIN0325	<b>Temp / Hum in</b>	23° C / 33%rh
<b>EUT Serial</b>	DD0000409	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	X-Axis, 802.11n HT80/VHT80	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	1 MHz / 3 MHz
<b>Dist/Ant Used</b>	1m - RA42-K-F-4B-C	<b>Performed by</b>	Gary

18 to 26GHz Plots for HT/VHT80 Transmit Mode

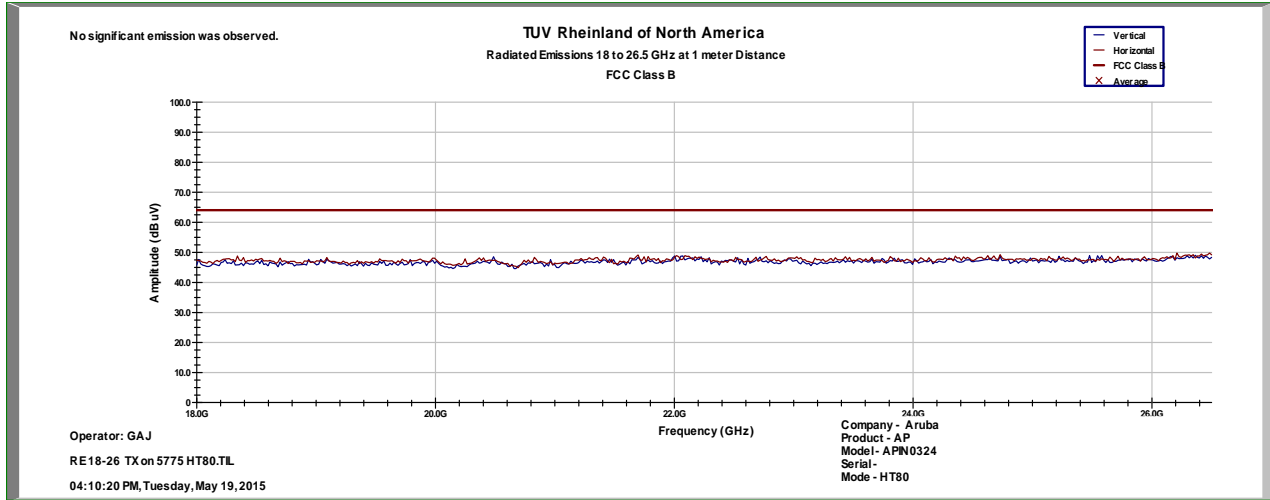

26 to 40GHz Plots for HT/VHT80 Transmit Mode

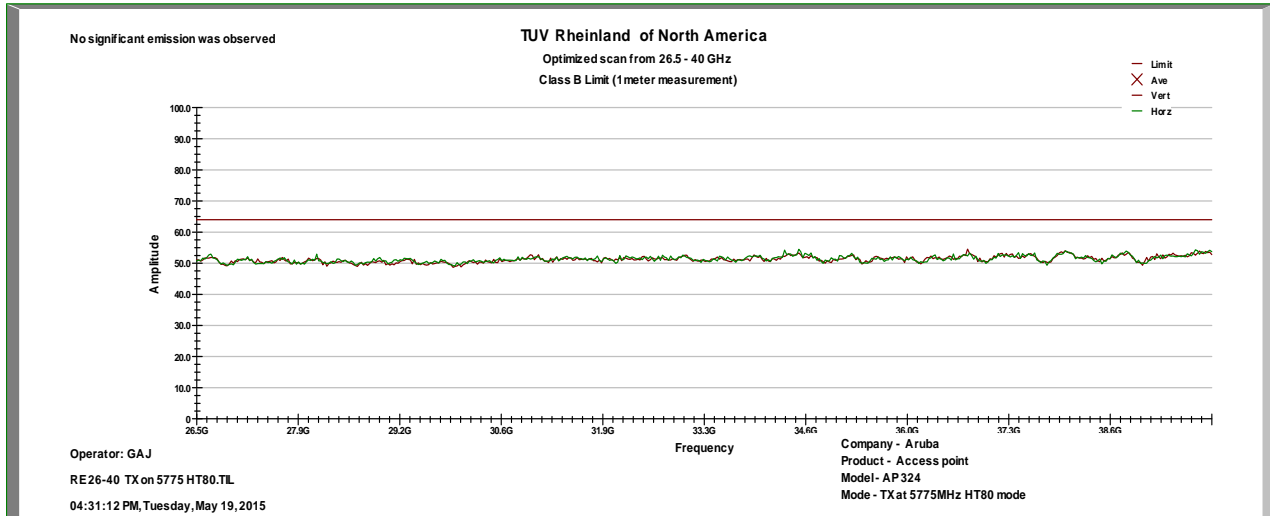

Notes: Limit was extrapolated to 1m distance for 18 GHz – 40 GHz range.

**Radiated Emissions data with APIN0324 External Antennas**

<b>SOP 1 Radiated Emissions</b>						Tracking # 31560848.001 Page 16 of 32					
<b>EUT Name</b> Wireless Access Point			<b>Date</b> Apr 13, 2015								
<b>EUT Model</b> APIN0324 and APIN0325			<b>Temp / Hum in</b> 23° C / 28%rh								
<b>EUT Serial</b> DD0000510 with External antenna <b>ANT 19</b>			<b>Temp / Hum out</b> N/A								
<b>EUT Config.</b> X-Axis, 802.11a 6Mbps			<b>Line AC / Freq</b> 120Vac/60Hz								
<b>Standard</b> CFR47 Part 15 Subpart C			<b>RBW / VBW</b> 120 kHz/ 300 kHz								
<b>Dist/Ant Used</b> 3m / JB3			<b>Performed by</b> Suresh Kondapalli								

1-18 GHz Transmitted at 802.11a TX On 5745

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin	
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB	
6149.68	44	2.12	-14.66	31.46	Avg	V	133	-2	54	-22.54	Pass
11493.21	55.94	2.84	-11.21	47.57	Avg	V	152	89	54	-6.43	Pass
3830.04	54.07	1.6	-16.87	38.8	Avg	V	112	90	54	-15.20	Pass
17252.00	38.52	3.7	-3.8	38.42	Avg	V	104	136	54	-15.58	Pass
17874.38	36.06	4.0	-0.78	39.28	Avg	V	176	348	54	-14.72	Pass

1-18 GHz Transmitted at 802.11a TX On 5785

17353.64	39.67	3.73	-3.7	39.7	Avg	V	119	218	54	-14.3	Pass
11572.61	58.91	2.86	-11.3	50.47	Avg	H	118	272	54	-3.53	Pass
17365.52	38.57	3.73	-3.68	38.62	Avg	V	104	134	54	-15.38	Pass

1-18 GHz Transmitted at 802.11a TX On 5825



11646.95	59.77	2.89	-11.25	51.41	Avg	V	194	67	54	-2.59	Pass
17477.34	37.11	3.73	-2.71	38.14	Avg	V	212	350	54	-15.87	Pass

Spec Margin = E-Field QP - Limit, E-Field QP = FIM QP+ Total CF ± Uncertainty  
 Total CF= AF+ Cable Loss AF= Antenna factor + Preamp

**SOP 1 Radiated Emissions**

Tracking # 31560848.001 Page 17 of 32

<b>EUT Name</b>	Wireless Access Point	<b>Date</b>	Apr 27, 2015
<b>EUT Model</b>	APIN0324 and APIN0325	<b>Temp / Hum in</b>	23° C / 33%rh
<b>EUT Serial</b>	DD0000510 with External antenna ANT 19	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	X-Axis, 802.11a at 6Mbps	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	1 MHz / 3 MHz
<b>Dist/Ant Used</b>	3m - EMCO3115 / 1m - RA42-K-F-4B-C	<b>Performed by</b>	Suresh Kondapalli

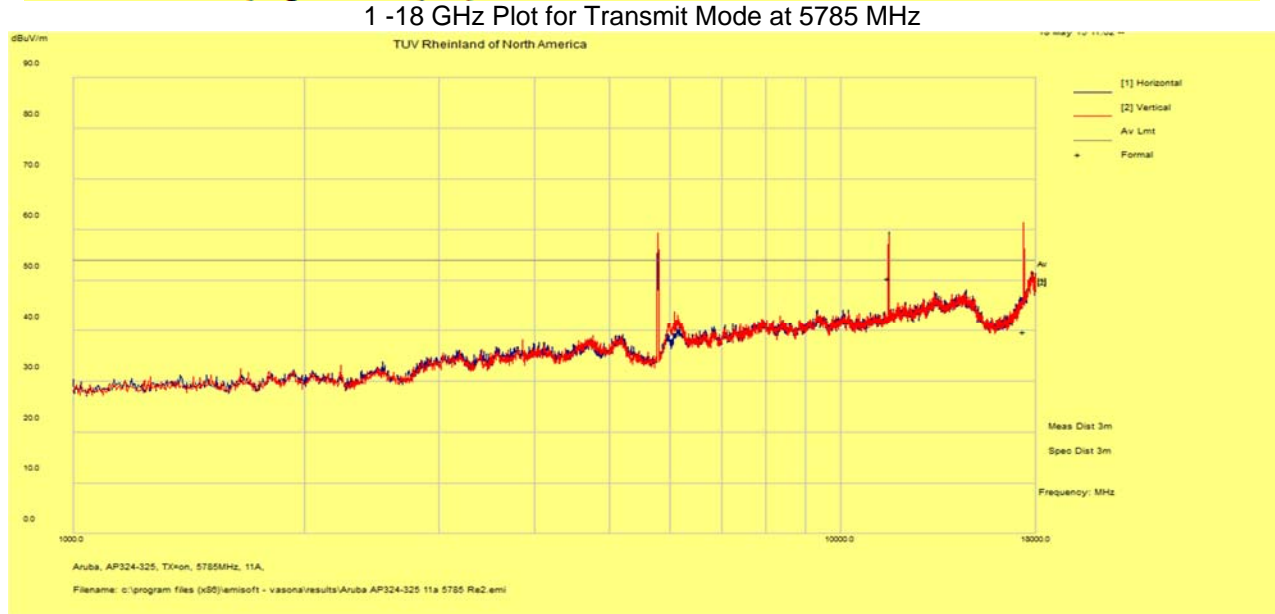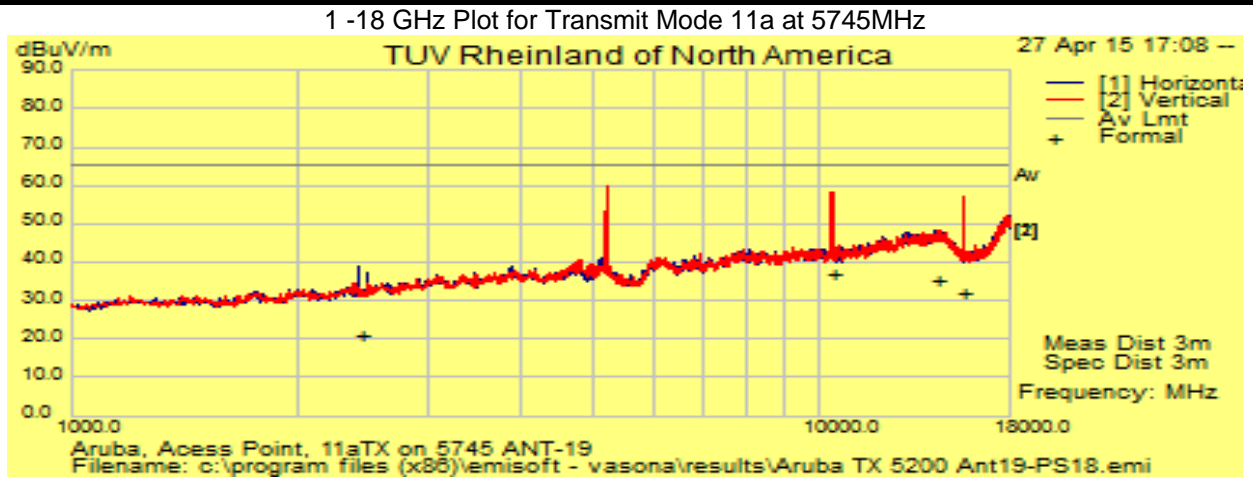


Notes:

**SOP 1 Radiated Emissions**

Tracking # 31560848.001 Page 18 of 32

<b>EUT Name</b>	Wireless Access Point	<b>Date</b>	Apr 27, 2015
<b>EUT Model</b>	APIN0324 and APIN0325	<b>Temp / Hum in</b>	23° C / 33%rh
<b>EUT Serial</b>	DD0000510 with External antenna ANT 19	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	X-Axis, 802.11a at 6Mbps	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	1 MHz / 3 MHz
<b>Dist/Ant Used</b>	3m - EMCO3115 / 1m - RA42-K-F-4B-C	<b>Performed by</b>	Suresh Kondapalli

1 -18 GHz Plot for Transmit Mode 11a at 5825 MHz

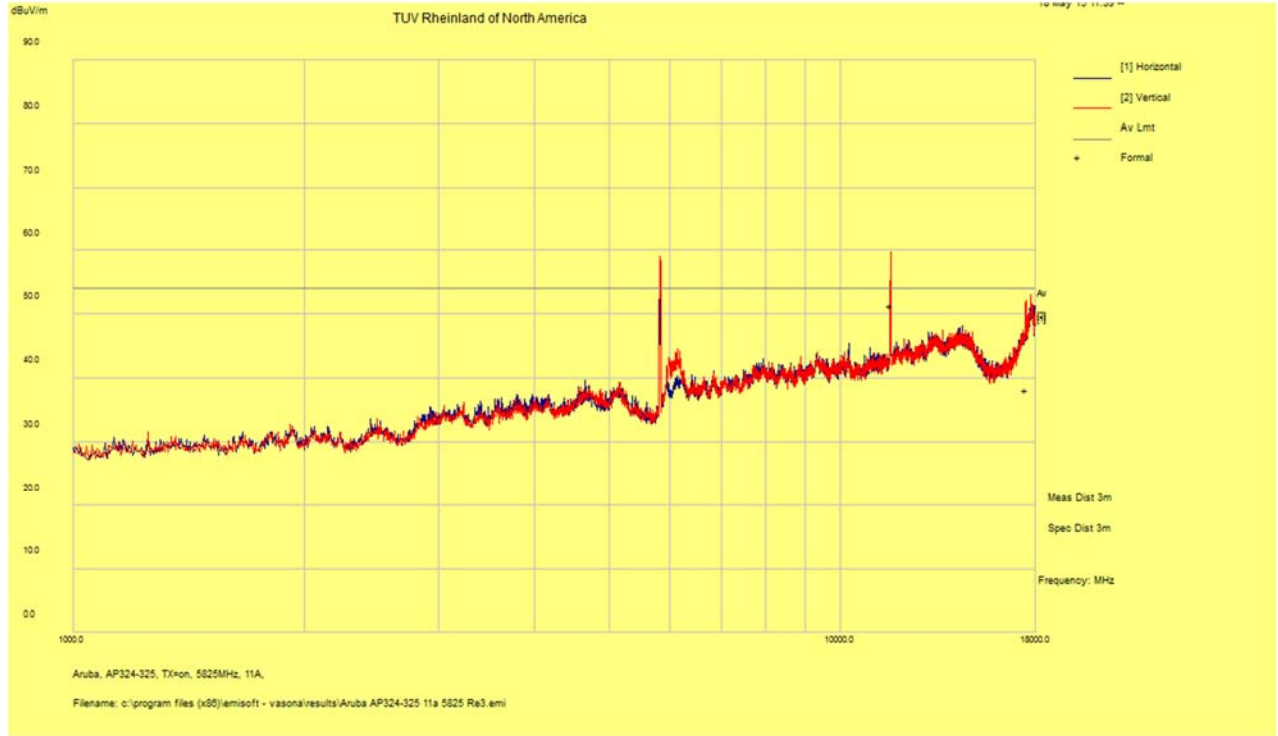

Notes:

<b>SOP 1 Radiated Emissions</b>		Tracking # 31560848.001 Page 19 of 32	
<b>EUT Name</b>	Wireless Access Point	<b>Date</b>	May 18, 2015
<b>EUT Model</b>	APIN0324 and APIN0325	<b>Temp / Hum in</b>	23° C / 28%rh
<b>EUT Serial</b>	DD0000510 with <b>External antenna ANT 48</b>	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	X-Axis, 802.11a mode at 6.0 Mbps/ chain	<b>Line AC / Freq</b>	120Vac/60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	120 kHz/ 300 kHz
<b>Dist/Ant Used</b>	3m / JB3	<b>Performed by</b>	Suresh Kondapalli

1 to 18 GHz Transmitted at 802.11a MHz 6Mbps/chain TX On 5745MHz


Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin	
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB	
11495.86	59.67	2.84	-11.22	51.29	Avg	H	185.00	116.00	54.00	-2.71	Pass
14727.85	53.94	3.38	-7.37	49.95	Avg	H	186	116	54.00	-4.05	Pass
17235.53	50.31	3.69	-4.19	49.81	Avg	H	174	170	54.00	-4.19	Pass

Spec Margin = E-Field QP - Limit, E-Field QP = FIM QP+ Total CF ± Uncertainty  
 Total CF= AF+ Cable Loss AF= Antenna factor + Preamp

**SOP 1 Radiated Emissions**

Tracking # 31560848.001 Page 20 of 32

<b>EUT Name</b>	Wireless Access Point	<b>Date</b>	Apr 27, 2015
<b>EUT Model</b>	APIN0324 and APIN0325	<b>Temp / Hum in</b>	23° C / 33%rh
<b>EUT Serial</b>	DD0000510 with External <b>Antenna ANT-48</b>	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	X-Axis, 802.11a at 6Mbps	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	1 MHz / 3 MHz
<b>Dist/Ant Used</b>	3m - EMCO3115 / 1m - RA42-K-F-4B-C	<b>Performed by</b>	Suresh Kondapalli

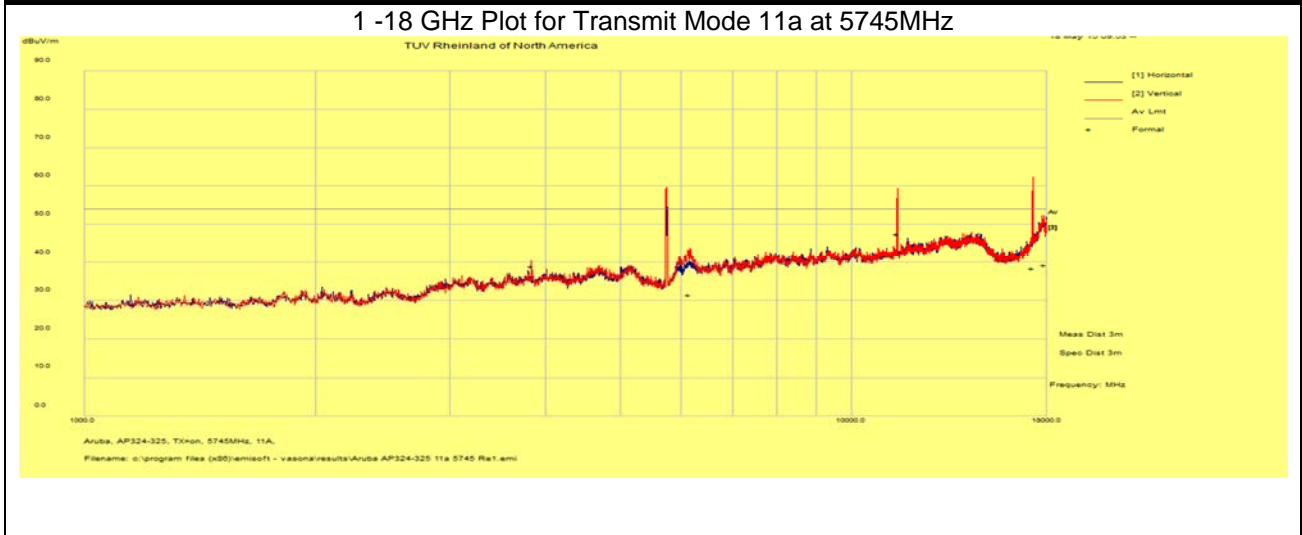

Notes: Pre scans indicated that Emissions with external antenna **ANT-48** are lower than antenna ANT 19 (Higher gain antenna, see section 6.3 for antenna details). Low, mid and high channel for 802.11a, HT20, HT40 and VHT80 modes were investigated, in all the above spurious emissions from **ANT-19** were higher than **ANT-48**.



<b>SOP 1 Radiated Emissions</b>						Tracking # 31560848.001 Page 21 of 32					
<b>EUT Name</b>	Wireless Access Point					<b>Date</b>	May 10, 2015				
<b>EUT Model</b>	APIN0324 and APIN0325					<b>Temp / Hum in</b>	23° C / 28%rh				
<b>EUT Serial</b>	DD0000510 with <b>Antenna ANT-19</b>					<b>Temp / Hum out</b>	N/A				
<b>EUT Config.</b>	X-Axis, 802.11 HT 20 6.5Mbps					<b>Line AC / Freq</b>	120Vac/60Hz				
<b>Standard</b>	CFR47 Part 15 Subpart C					<b>RBW / VBW</b>	120 kHz/ 300 kHz				
<b>Dist/Ant Used</b>	3m / JB3					<b>Performed by</b>	Suresh Kondapalli				

1-18 GHz Transmitted at 802.11 HT20 TX On 5745MHz											
Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin	
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB	
17857.12	36.43	3.99	-0.49	39.93	Avg	V	164	196	54	-14.07	Pass
17352.57	41.79	3.73	-3.7	41.82	Avg	V	132	226	54	-12.19	Pass
11571.82	61.56	2.86	-11.3	53.12	Avg	V	145	234	54	-0.88	Pass
17368.58	39.38	3.73	-3.67	39.44	Avg	V	163	344	54	-14.56	Pass
1-18 GHz Transmitted at 802.11 HT20 TX On 5785MHz											
11645.44	60.74	2.89	-11.25	52.38	Avg	V	145	234	54	-1.62	Pass
1-18 GHz Transmitted at 802.11 HT 20 TX On 5825MHz											
11493.12	59.5	2.84	-11.21	51.13	Avg	V	145	233	54	-2.87	Pass


Spec Margin = E-Field QP - Limit, E-Field QP = FIM QP+ Total CF ± Uncertainty  
 Total CF= AF+ Cable Loss AF= Antenna factor + Preamp

**SOP 1 Radiated Emissions**

Tracking # 31560848.001 Page 22 of 32

<b>EUT Name</b>	Wireless Access Point	<b>Date</b>	May 10, 2015
<b>EUT Model</b>	APIN0324 and APIN0325	<b>Temp / Hum in</b>	23° C / 33%rh
<b>EUT Serial</b>	DD0000510 with Ext antenna <b>ANT- 19</b>	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	X-Axis, 802.11 HT20 at 6.5Mbps	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	1 MHz / 3 MHz
<b>Dist/Ant Used</b>	3m - EMCO3115 / 1m - RA42-K-F-4B-C	<b>Performed by</b>	Suresh Kondapalli

1 -18 GHz Plot for Transmit Mode HT20 at 5785 MHz

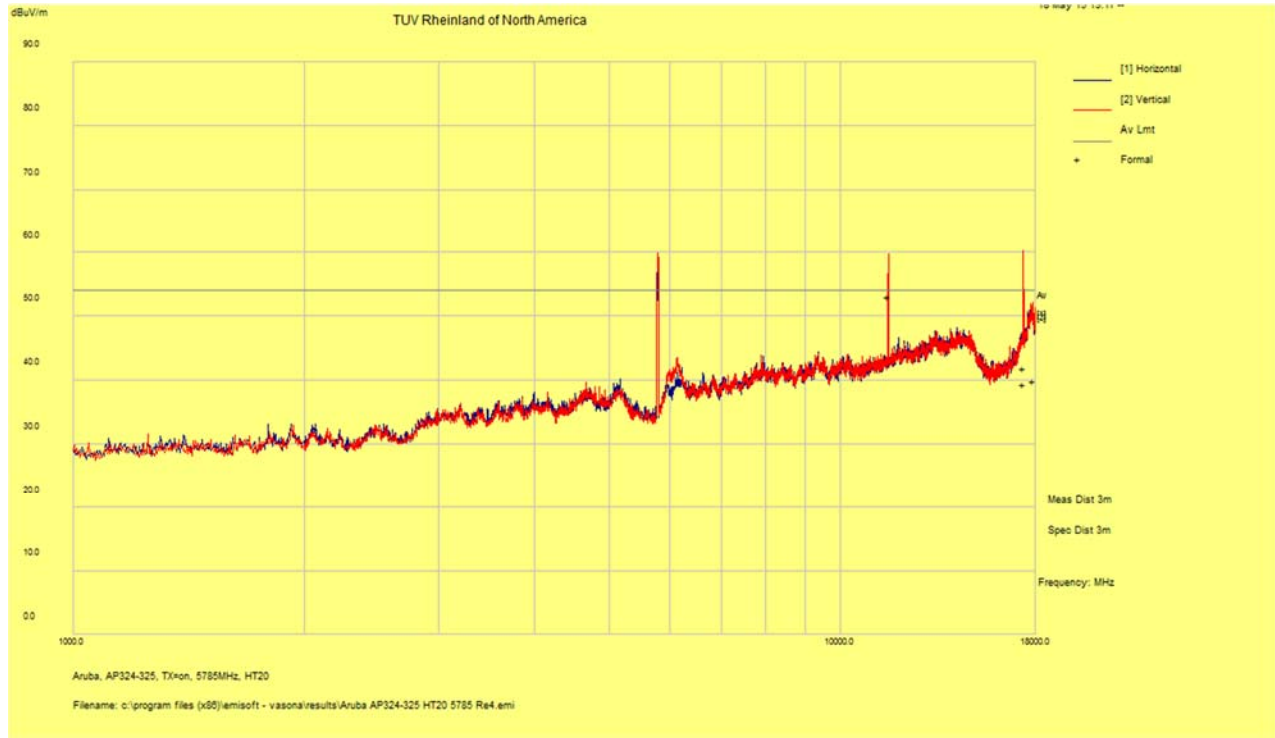

Notes:

<b>SOP 1 Radiated Emissions</b>		Tracking # 31560848.001 Page 23 of 32	
<b>EUT Name</b>	Wireless Access Point	<b>Date</b>	May 01, 2015
<b>EUT Model</b>	APIN0324 and APIN0325	<b>Temp / Hum in</b>	23° C / 28%rh
<b>EUT Serial</b>	DD0000510 with <b>Antenna ANT-48</b>	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	X-Axis, 802.11 HT 20 6.5Mbps	<b>Line AC / Freq</b>	120Vac/60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	120 kHz/ 300 kHz
<b>Dist/Ant Used</b>	3m / JB3	<b>Performed by</b>	Suresh Kondapalli

1-18 GHz Transmitted at 802.11 HT20 TX On 5745MHz

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin	
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB	
1899.70	61.08	1.09	-23.25	38.92	Avg	H	106	-8	54.00	-15.08	Pass
13266.62	55.69	3.24	-8.91	50.02	Avg	H	145	262	54.00	-3.98	Pass
5230.53	54.51	1.91	-15.75	40.68	Avg	V	155	368	54.00	-13.32	Pass
17236.22	50.63	3.69	-4.17	50.15	Avg	V	146	299	54.00	-3.85	Pass

Spec Margin = E-Field QP - Limit, E-Field QP = FIM QP+ Total CF ± Uncertainty


Total CF= AF+ Cable Loss AF= Antenna factor + Preamp

**SOP 1 Radiated Emissions**

Tracking # 31560848.001 Page 24 of 32

<b>EUT Name</b>	Wireless Access Point	<b>Date</b>	May 01, 2015
<b>EUT Model</b>	APIN0324 and APIN0325	<b>Temp / Hum in</b>	23° C / 33%rh
<b>EUT Serial</b>	DD0000510 with Ext antenna <b>ANT- 48</b>	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	X-Axis, 802.11 HT20 at 6.5Mbps	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	1 MHz / 3 MHz
<b>Dist/Ant Used</b>	3m - EMCO3115 / 1m - RA42-K-F-4B-C	<b>Performed by</b>	Suresh Kondapalli

1 -18 GHz Plot for Transmit Mode HT20 at 5745 MHz

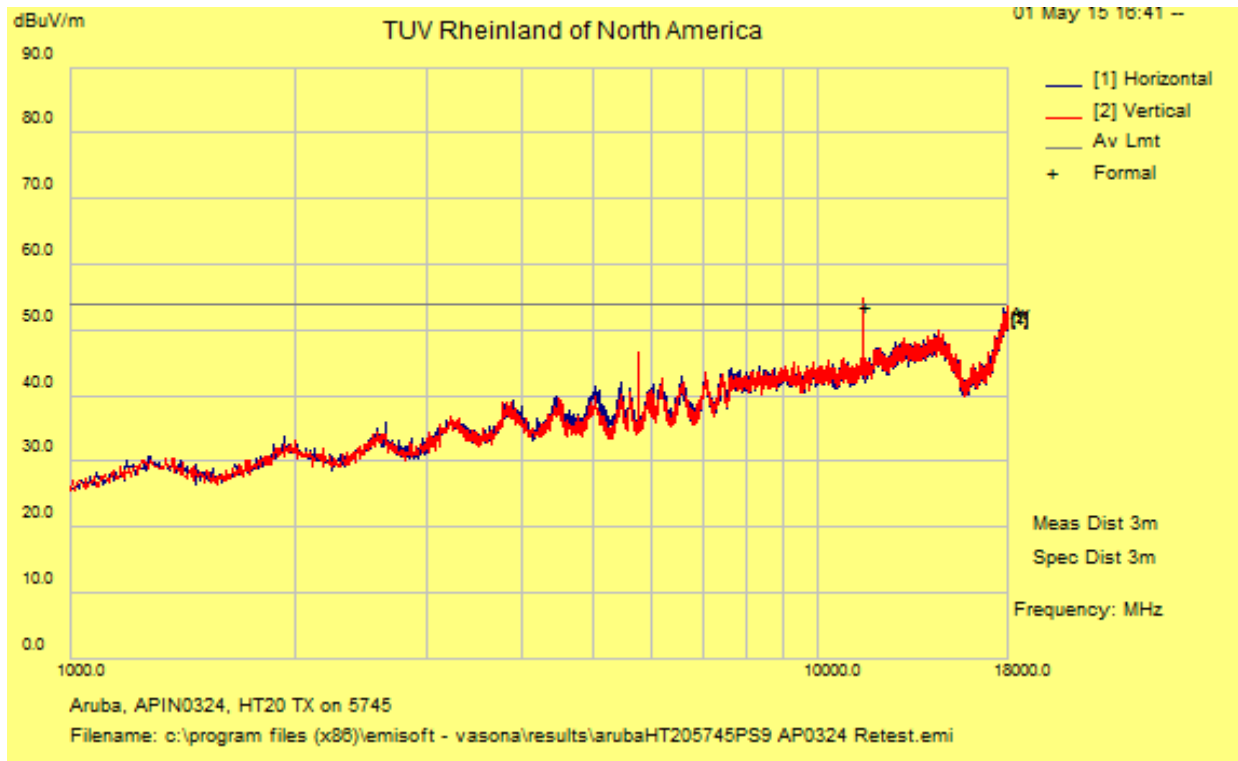

Notes:

<b>SOP 1 Radiated Emissions</b>						Tracking # 31560848.001 Page 25 of 32					
<b>EUT Name</b>			Wireless Access Point			<b>Date</b>			Apr 27, 2015		
<b>EUT Model</b>			APIN0324 and APIN0325			<b>Temp / Hum in</b>			23° C / 28%rh		
<b>EUT Serial</b>			DD0000510 with <b>Ext Antenna ANT-19</b>			<b>Temp / Hum out</b>			N/A		
<b>EUT Config.</b>			X-Axis, 802.11 HT 40 13.5Mbps			<b>Line AC / Freq</b>			120Vac/60Hz		
<b>Standard</b>			CFR47 Part 15 Subpart C			<b>RBW / VBW</b>			120 kHz/ 300 kHz		
<b>Dist/Ant Used</b>			3m / JB3			<b>Performed by</b>			Suresh Kondapalli		

1-18 GHz Transmitted at 802.11 HT40 TX On 5455

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin	
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB	
17260.83	38.28	3.7	-3.94	38.05	Avg	V	100	152	54	-15.95	Pass
11510.44	60.16	2.84	-11.24	51.76	Avg	H	136	226	54	-2.24	Pass
17284.88	40.39	3.71	-4.21	39.89	Avg	V	102	226	54	-14.11	Pass

1-18 GHz Transmitted at 802.11 HT40 TX On 5795

17359.98	35.25	3.73	-3.69	35.3	Avg	V	105	130	54	-18.7	Pass
11591.44	59.7	2.87	-11.27	51.29	Avg	V	137	224	54	-2.71	Pass
17755.02	36.77	3.89	-0.07	40.6	Avg	H	227	336	54	-13.4	Pass


Spec Margin = E-Field QP - Limit, E-Field QP = FIM QP+ Total CF ± Uncertainty  
 Total CF= AF+ Cable Loss AF= Antenna factor + Preamp

**SOP 1 Radiated Emissions**


Tracking # 31560848.001 Page 26 of 32

<b>EUT Name</b>	Wireless Access Point	<b>Date</b>	Apr 27, 2015
<b>EUT Model</b>	APIN0324 and APIN0325	<b>Temp / Hum in</b>	23° C / 33%rh
<b>EUT Serial</b>	DD0000510 with Ext antenna <b>ANT-19</b>	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	X-Axis, 802.11 HT40 at 13.5Mbps	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	1 MHz / 3 MHz
<b>Dist/Ant Used</b>	3m - EMCO3115 / 1m - RA42-K-F-4B-C	<b>Performed by</b>	Suresh Kondapalli

1 -18 GHz Plot for Transmit Mode HT40 at 5755 MHz

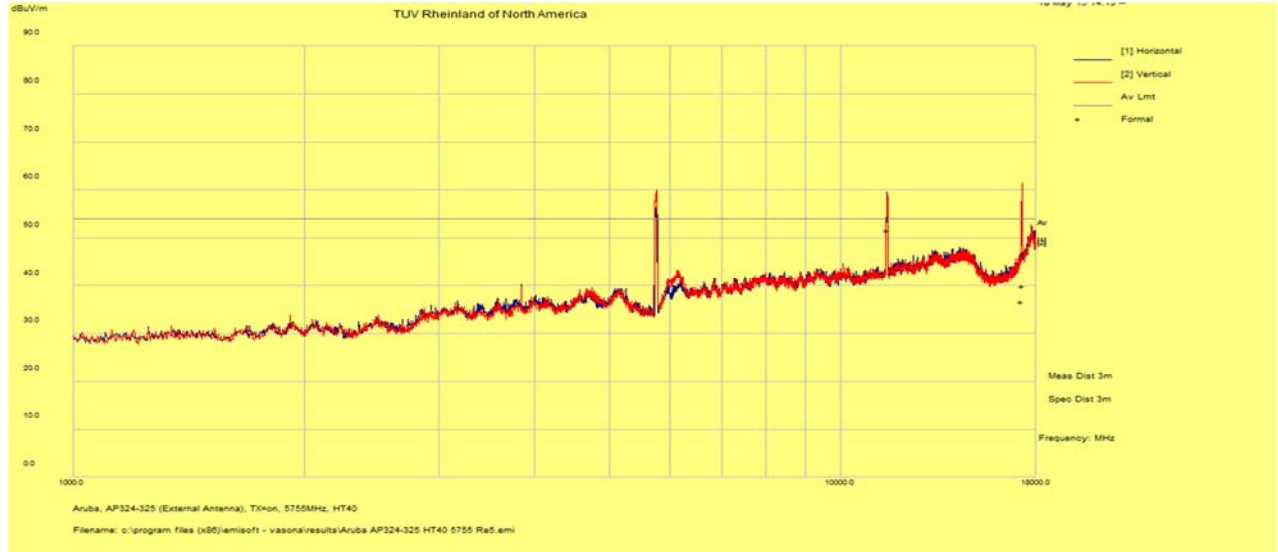

1 -18 GHz Plot for Transmit Mode HT40 at 5795 MHz

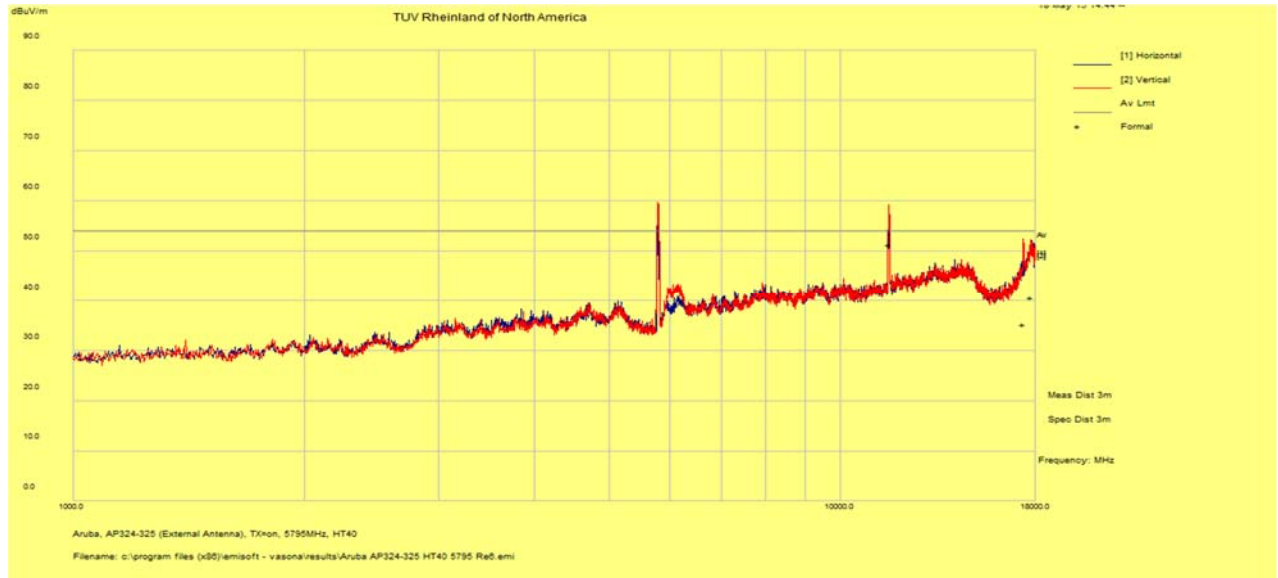

Notes:

<b>SOP 1 Radiated Emissions</b>				Tracking # 31560848.001 Page 27 of 32			
<b>EUT Name</b>	Wireless Access Point			<b>Date</b>	May 01, 2015		
<b>EUT Model</b>	APIN0324 and APIN0325			<b>Temp / Hum in</b>	23° C / 28%rh		
<b>EUT Serial</b>	DD0000510 with <b>Antenna ANT-48</b>			<b>Temp / Hum out</b>	N/A		
<b>EUT Config.</b>	X-Axis, 802.11 HT 40 13.5Mbps			<b>Line AC / Freq</b>	120Vac/60Hz		
<b>Standard</b>	CFR47 Part 15 Subpart C			<b>RBW / VBW</b>	120 kHz/ 300 kHz		
<b>Dist/Ant Used</b>	3m / JB3			<b>Performed by</b>	Suresh Kondapalli		

1-18 GHz Transmitted at 802.11 HT40 TX On 5755MHz

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin	
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB	
4764.69	55.47	1.87	-15.95	41.39	Avg	H	106	-8	54.00	-12.61	Pass
14664.15	54.12	3.42	-7.28	50.26	Avg	H	193	114	54.00	-3.74	Pass
1499.60	58.62	0.95	-24.92	34.65	Avg	V	197	12	54.00	-19.35	Pass
1853.67	56.33	1.07	-23.43	33.97	Avg	V	182	368	54.00	-20.03	Pass
3188.22	66.10	1.44	-19.29	48.24	Avg	V	107	-4	54.00	-5.76	Pass
11509.68	58.82	2.84	-11.24	50.42	Avg	V	184	320	54.00	-3.58	Pass


Spec Margin = E-Field QP - Limit, E-Field QP = FIM QP+ Total CF ± Uncertainty

Total CF= AF+ Cable Loss AF= Antenna factor + Preamp

**SOP 1 Radiated Emissions** Tracking # 31560848.001 Page 28 of 32

<b>EUT Name</b>	Wireless Access Point	<b>Date</b>	May 01, 2015
<b>EUT Model</b>	APIN0324 and APIN0325	<b>Temp / Hum in</b>	23° C / 33%rh
<b>EUT Serial</b>	DD0000510 with Ext antenna <b>ANT- 48</b>	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	X-Axis, 802.11 HT40 at 13.5Mbps	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	1 MHz / 3 MHz
<b>Dist/Ant Used</b>	3m - EMCO3115 / 1m - RA42-K-F-4B-C	<b>Performed by</b>	Suresh Kondapalli

1 -18 GHz Plot for Transmit Mode HT40 at 5755 MHz

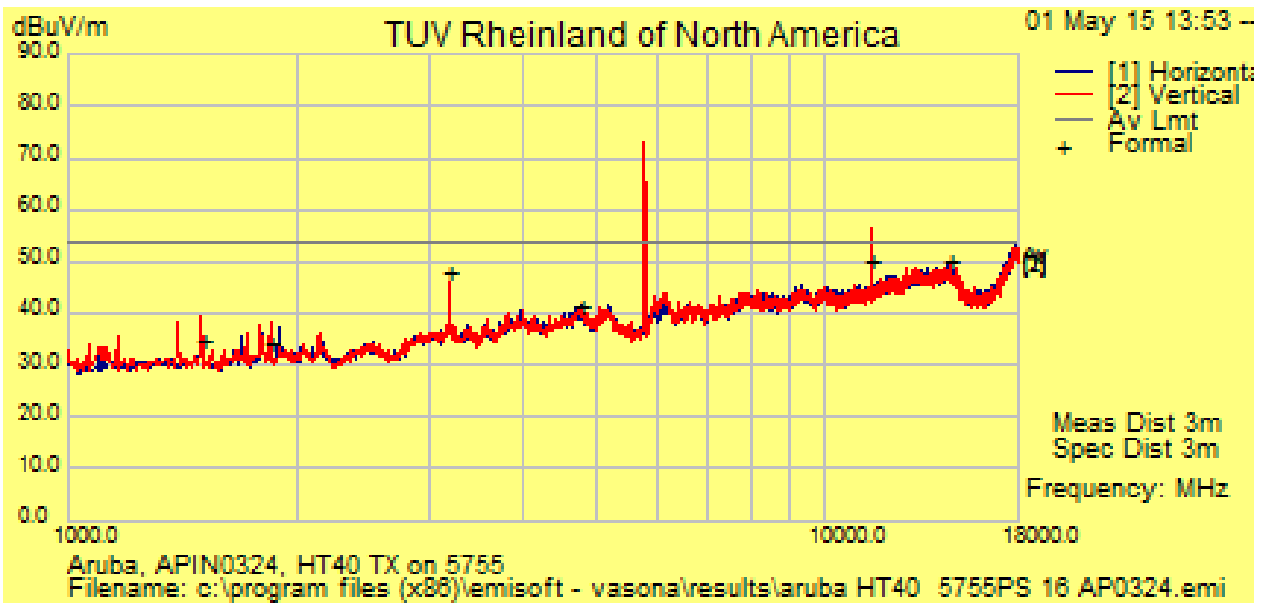

Notes:



<b>SOP 1 Radiated Emissions</b>							Tracking # 31560848.001 Page 29 of 32				
<b>EUT Name</b>		Wireless Access Point			<b>Date</b>		May 15, 2015				
<b>EUT Model</b>		APIN0324 and APIN0325			<b>Temp / Hum in</b>		23° C / 28%rh				
<b>EUT Serial</b>		DD0000510 with Ext Antenna <b>ANT-19</b>			<b>Temp / Hum out</b>		N/A				
<b>EUT Config.</b>		X-Axis, 802.11VHT 80			<b>Line AC / Freq</b>		120Vac/60Hz				
<b>Standard</b>		CFR47 Part 15 Subpart C			<b>RBW / VBW</b>		120 kHz/ 300 kHz				
<b>Dist/Ant Used</b>		3m - EMCO3115 / 1m - RA42-K-F-4B-C			<b>Performed by</b>		Gray				
1-18 GHz Transmitted at 802.11 HT80 TX On 5775											
Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin	
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB	
17339.69	35.69	3.73	-3.79	35.63	Avg	V	100	150	54	-18.37	Pass
17753.57	36.68	3.89	-0.03	40.54	Avg	H	155	184	54	-13.46	Pass
11610.96	52.61	2.87	-11.24	44.24	Avg	V	100	224	54	-9.76	Pass
11553.16	56.58	2.85	-11.24	48.19	Avg	V	143	224	54	-5.81	Pass


Spec Margin = E-Field QP - Limit, E-Field QP = FIM QP+ Total CF ± Uncertainty  
 Total CF= AF+ Cable Loss AF= Antenna factor + Preamp

**SOP 1 Radiated Emissions**

Tracking # 31560848.001 Page 30 of 32

<b>EUT Name</b>	Wireless Access Point	<b>Date</b>	May 15, 2015
<b>EUT Model</b>	APIN0324 and APIN0325	<b>Temp / Hum in</b>	23° C / 33%rh
<b>EUT Serial</b>	DD0000510 with Ext Antenna <b>ANT-19</b>	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	X-Axis, 802.11 VHT80	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	1 MHz / 3 MHz
<b>Dist/Ant Used</b>	3m - EMCO3115 / 1m - RA42-K-F-4B-C	<b>Performed by</b>	Gray

1 -18 GHz Plot for Transmit Mode HT80 at 5775MHz

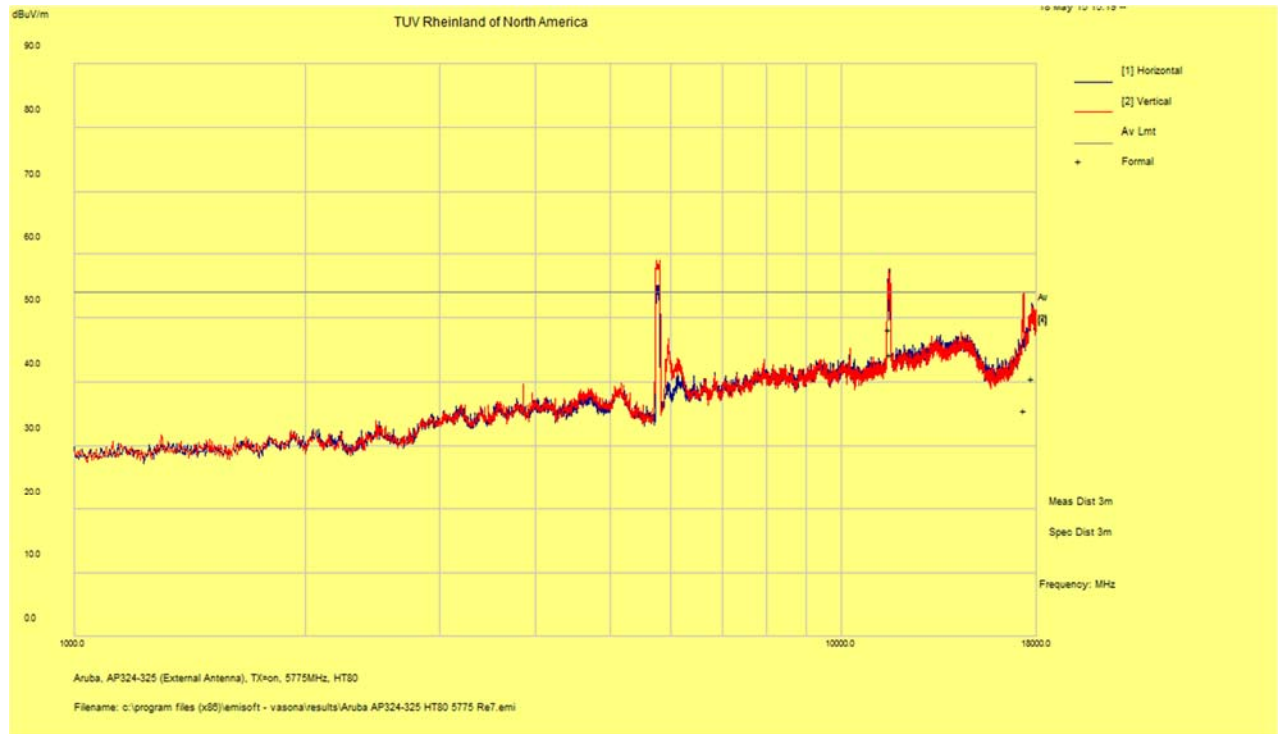

Notes: No Emissions were found 18 to 40GHz range

<b>SOP 1 Radiated Emissions</b>				Tracking # 31560848.001 Page 31 of 32			
<b>EUT Name</b>	Wireless Access Point			<b>Date</b>	May 01, 2015		
<b>EUT Model</b>	APIN0324 and APIN0325			<b>Temp / Hum in</b>	23° C / 28%rh		
<b>EUT Serial</b>	DD0000510 with <b>Antenna ANT-48</b>			<b>Temp / Hum out</b>	N/A		
<b>EUT Config.</b>	X-Axis, 802.11 VHT 80			<b>Line AC / Freq</b>	120Vac/60Hz		
<b>Standard</b>	CFR47 Part 15 Subpart C			<b>RBW / VBW</b>	120 kHz/ 300 kHz		
<b>Dist/Ant Used</b>	3m / JB3			<b>Performed by</b>	Suresh Kondapalli		

1-18 GHz Transmitted at 802.11 HT80 TX On 5775MHz

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin	
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB	
1800.31	60.41	1.05	-23.53	37.93	Avg	H	142	260	54.00	-16.07	Pass
11609.62	56.60	2.87	-11.25	48.22	Avg	H	126	333	54.00	-5.78	Pass
4765.97	56.60	1.87	-15.96	42.51	Avg	V	180	355	54.00	-11.49	Pass
14487.84	54.26	3.38	-7.38	50.26	Avg	V	179	-8	54.00	-3.74	Pass

Spec Margin = E-Field QP - Limit, E-Field QP = FIM QP+ Total CF ± Uncertainty

Total CF= AF+ Cable Loss AF= Antenna factor + Preamp

SOP 1 Radiated Emissions		Tracking # 31560848.001 Page 32 of 32	
<b>EUT Name</b>	Wireless Access Point	<b>Date</b>	May 01, 2015
<b>EUT Model</b>	APIN0324 and APIN0325	<b>Temp / Hum in</b>	23° C / 33%rh
<b>EUT Serial</b>	DD0000510 with Ext antenna ANT- 48	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	X-Axis, 802.11 VHT80	<b>Line AC</b>	120Vac 60Hz
<b>Standard</b>	CFR47 Part 15 Subpart C	<b>RBW / VBW</b>	1 MHz / 3 MHz
<b>Dist/Ant Used</b>	3m - EMCO3115 / 1m - RA42-K-F-4B-C	<b>Performed by</b>	Suresh Kondapalli

1 -18 GHz Plot for Transmit Mode HT80 at 5775 MHz

Aruba, APIN0324, VHT80 TX on 5775  
 Filename: c:\program files (x86)\emisoft - vasona\results\aruba VHT80 5575 PS 16 AP0324.emi

Notes:

### 4.3.6 Sample Calculation

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{FIM} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: FIM = Field Intensity Meter (dB $\mu$ V)  
 AMP = Amplifier Gain (dB)  
 CBL = Cable Loss (dB)  
 ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V/m}}{20}}$$

---

## **4.4 AC Conducted Emissions**

Testing was performed in accordance with ANSI C63.4: 2010. These test methods are listed under the laboratory's A2LA Scope of Accreditation.

This test measures the levels emanating from the EUT's AC input port, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices.

The AC conducted emissions of equipment under test shall not exceed the values in CFR47 Part 15.207: 2012.

### **4.4.1 Test Methodology**

A test program that controls instrumentation and data logging was used to automate the AC Power Line Conducted emission test procedure. The frequency range of interest was divided into sub-ranges such as to yield a frequency resolution of 9 kHz. Each phase and neutral of the AC power line were measured with respect to ground. Measurements were performed using a set of 50 $\mu$ H / 50 $\Omega$  LISNs.

Testing is either performed in Lab 2. The setup photographs clearly identify which site was used. The vertical ground plane used in the semi-anechoic chamber is a 2m x 2m solid aluminum frame and panel, and it is bonded to the horizontal ground plane.

In the case of tabletop equipment, the EUT is placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane and 40cm from a vertical ground reference plane. The rear of the EUT was positioned flush with the backside of the table and directly over the LISNs. The power and I/O cables were routed over the edge of the table and bundled approximately 40cm from the ground plane. Support equipment was powered from a separate LISN.

#### **4.4.1.1 Deviations**

There were no deviations from this test methodology.


### **4.4.2 Test Results**

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

**Table 7: AC Conducted Emissions – Test Results**

<b>Test Conditions:</b> Conducted Measurement at Normal Conditions only									
<b>Antenna Type:</b> Attached					<b>Power Level:</b> See Test Plan				
<b>AC Power:</b> 120 Vac/60 Hz					<b>Configuration:</b> Tabletop				
<b>Ambient Temperature:</b> 23° C					<b>Relative Humidity:</b> 31% RH				
<b>Configuration</b>		<b>Frequency Range</b>			<b>Test Result</b>				
Line 1 (Hot)		0.15 to 30 MHz			Pass				
Line 2 (Neutral)		0.15 to 30 MHz			Pass				
<b>SOP 2 Conducted Emissions</b>						Tracking 31560848.001 Page 1 of 4 #			
<b>EUT Name</b>		Wireless Access Point			<b>Date</b>		Apr 20, 2015		
<b>EUT Model</b>		APIN0324/0325			<b>Temp / Hum in</b>		23°C / 32%rh		
<b>EUT Serial</b>		DD0000510			<b>Temp / Hum out</b>		N/A		
<b>EUT Config.</b>		TX On 5200MHz 11a mode			<b>Line AC / Freq</b>		120V 60Hz		
<b>Standard</b>		CFR47 Part 15.207			<b>RBW / VBW</b>		9kHz / 30 kHz		
<b>Lab/LISN</b>		Lab #2 /Com-Power, Line 1			<b>Performed by</b>		Suresh K		
Frequency	Raw	Cable Loss	Ins. Loss	Level	Detector	Line	Limit	Margin	Result
MHz	dBuV	dB	dB	dBuV			dBuV	dB	
0.15	34.93	9.96	-0.10	44.79	QP	Live	66	-21.21	Pass
0.15	14.82	9.96	-0.10	24.68	Avg	Live	56	-31.32	Pass
0.20	44.09	9.97	-0.08	53.97	QP	Live	63.82	-9.85	Pass
0.20	26.00	9.97	-0.08	35.88	Avg	Live	53.82	-17.93	Pass
0.26	36.71	9.98	-0.06	46.63	QP	Live	61.37	-14.75	Pass
0.26	25.10	9.98	-0.06	35.02	Avg	Live	51.37	-16.36	Pass
0.34	28.92	9.98	-0.05	38.85	QP	Live	59.32	-20.47	Pass
0.34	19.75	9.98	-0.05	29.68	Avg	Live	49.32	-19.64	Pass
0.54	25.96	9.99	-0.04	35.92	QP	Live	56	-20.08	Pass
0.54	14.22	9.99	-0.04	24.17	Avg	Live	46	-21.83	Pass
17.16	22.84	10.19	0.10	33.13	QP	Live	60	-26.87	Pass
17.16	16.65	10.19	0.10	26.95	Avg	Live	50	-23.05	Pass
Spec Margin = QP./Ave. - Limit, ± Uncertainty									
Combined Standard Uncertainty $U_c(y) = \pm 1.2$ dB Expanded Uncertainty $U = kU_c(y)$ $k = 2$ for 95% confidence									
Notes: EUT was setup as table top equipment and transmitted at 5580 MHz in HT20 at 6.5Mbps									

<b>SOP 2</b> Conducted Emissions		Tracking # 31560848.001 Page 2 of 4	
<b>EUT Name</b>	Wireless Access Point	<b>Date</b>	Apr 20, 2015
<b>EUT Model</b>	APIN0324/0325	<b>Temp / Hum in</b>	23°C / 32%rh
<b>EUT Serial</b>	DD0000510	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	TX on 5200MHz 11a mode	<b>Line AC</b>	120V 60Hz
<b>Standard</b>	CFR47 Part 15.207	<b>RBW / VBW</b>	9kHz / 30 kHz
<b>Lab/LISN</b>	Lab #2 /Com-Power, Line 1	<b>Performed by</b>	Suresh K

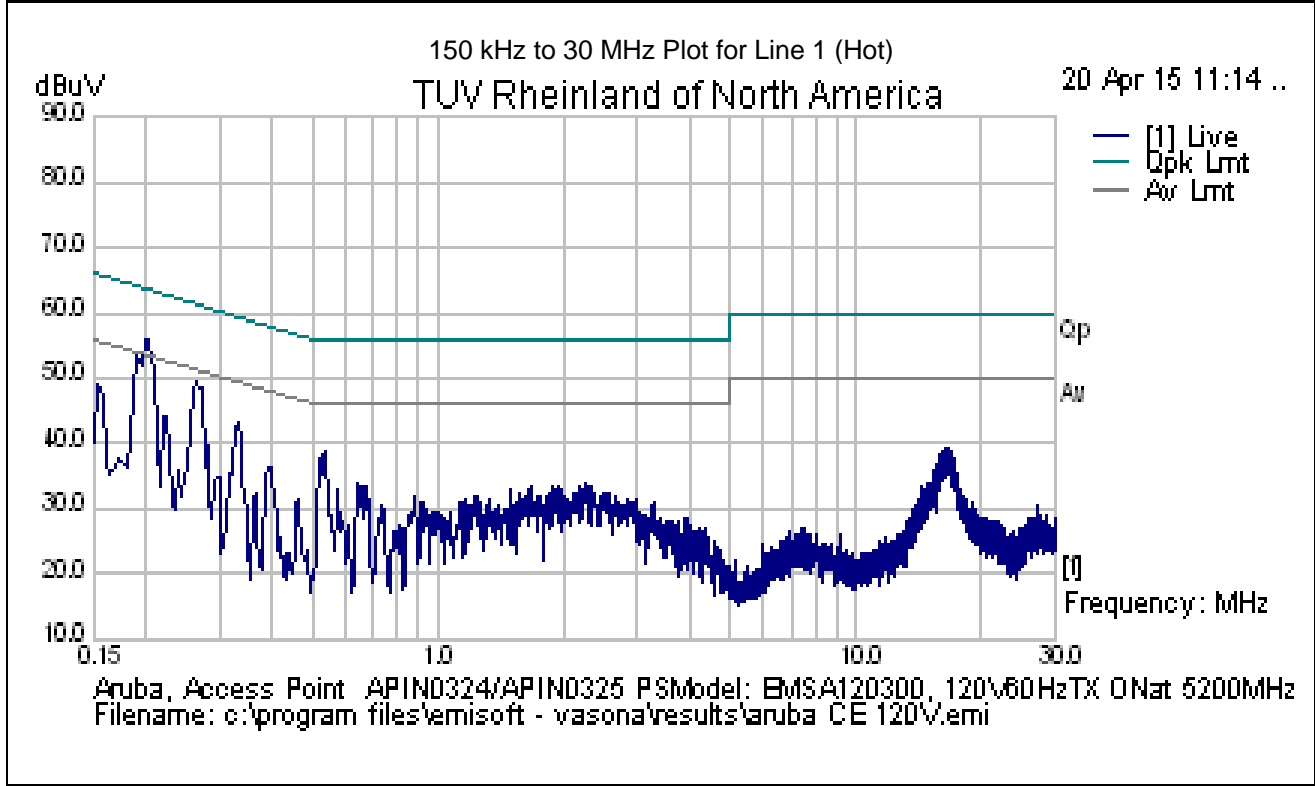

Notes: Meet FCC Class B limit.


SOP 2 Conducted Emissions						Tracking # 31560848.001 Page 3 of 4			
<b>EUT Name</b>		Wireless Access Point				<b>Date</b>		Apr 20, 2015	
<b>EUT Model</b>		APIN0324/0325				<b>Temp / Hum in</b>		23°C / 32%rh	
<b>EUT Serial</b>		DD0000510				<b>Temp / Hum out</b>		N/A	
<b>EUT Config.</b>		TX on 5200MHz 11a mode				<b>Line AC / Freq</b>		120V/60Hz	
<b>Standard</b>		CFR47 Part 15.207				<b>RBW / VBW</b>		9kHz / 30 kHz	
<b>Lab/LISN</b>		Lab #2 /Com-Power, Line 2				<b>Performed by</b>		Suresh	
Frequency	Raw	Cable Loss	Ins. Loss	Level	Detector	Line	Limit	Margin	Result
MHz	dBuV	dB	dB	dBuV			dBuV	dB	
0.15	33.24	9.96	-0.10	43.10	QP	Neutral	65.98	-22.88	Pass
0.15	13.66	9.96	-0.10	23.52	Avg	Neutral	55.98	-32.46	Pass
0.19	43.47	9.96	-0.08	53.35	QP	Neutral	63.86	-10.51	Pass
0.19	26.23	9.96	-0.08	36.11	Avg	Neutral	53.86	-17.75	Pass
0.26	36.01	9.98	-0.06	45.93	QP	Neutral	61.44	-15.51	Pass
0.26	20.65	9.98	-0.06	30.57	Avg	Neutral	51.44	-20.87	Pass
0.33	29.39	9.98	-0.05	39.31	QP	Neutral	59.55	-20.24	Pass
0.33	13.39	9.98	-0.05	23.32	Avg	Neutral	49.55	-26.23	Pass
0.58	21.82	10.00	-0.04	31.78	QP	Neutral	56.00	-24.22	Pass
0.58	12.54	10.00	-0.04	22.50	Avg	Neutral	46.00	-23.50	Pass
16.55	29.61	10.19	0.09	39.88	QP	Neutral	60.00	-20.12	Pass
16.55	22.35	10.19	0.09	32.62	Avg	Neutral	50.00	-17.38	Pass
Spec Margin = QP./Ave. - Limit, ± Uncertainty									
Combined Standard Uncertainty $u_c(y) = \pm 1.2$ dB Expanded Uncertainty $U = k u_c(y)$ $k = 2$ for 95% confidence									
Notes: EUT was setup as table top equipment and transmitted at 5580 MHz in HT20 at 6.5Mbps									



**SOP 2** Conducted Emissions

Tracking # 31560848.001 Page 4 of 4

<b>EUT Name</b>	Wireless Access Point	<b>Date</b>	Apr 20, 2015
<b>EUT Model</b>	APIN0324/0325	<b>Temp / Hum in</b>	23°C / 32%rh
<b>EUT Serial</b>	DD0000510	<b>Temp / Hum out</b>	N/A
<b>EUT Config.</b>	TX on 5200MHz 11a mode	<b>Line AC</b>	120V/60Hz
<b>Standard</b>	CFR47 Part 15.107	<b>RBW / VBW</b>	9kHz / 30 kHz
<b>Lab/LISN</b>	Lab #2 /Com-Power, Line 2	<b>Performed by</b>	Suresh K

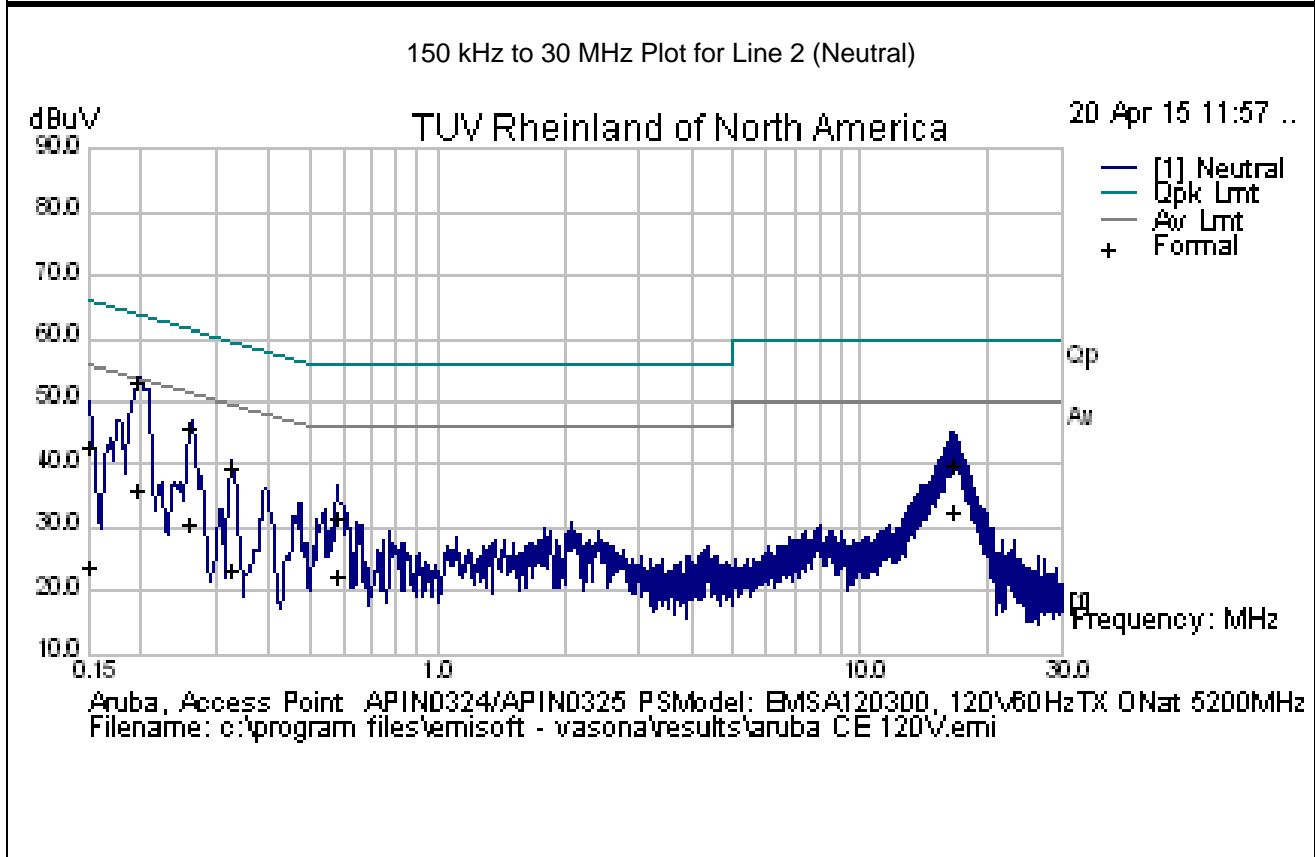

Note: Meet FCC Class B Limit.

---

## **4.5 Frequency Stability**

In accordance with 47 CFR Part 15.407(g) the frequency stability of U-NII devices must be such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual. The Manufacturer calls out operating temperature ranges of +0° to +40° C

### **4.5.1 Test Methodology**

The manufacturer of the equipment is responsible for ensuring that the frequency stability is such that emissions are always maintained within the band of operation under all conditions. This test performs according to ANSI C63.10-2009 Section 6.8

### **4.5.2 Manufacturer Declaration**

The frequency stability of the reference oscillator sets the frequency stability of the RF transceiver signals. Therefore all of the RF signal should have  $\pm 20$  ppm stability.

This stability accounts for room temp tolerance of the crystal oscillator circuit, frequency variation across temperature, and crystal ageing.

Worst case:

5.200 GHz -  $\pm 20$  ppm/104 kHz

$\pm 20$  ppm at 5 GHz translates to a maximum frequency shift of  $\pm 103$  kHz. As the edge of the channels are at least one MHz from either of the band edges,  $\pm 103$  kHz is more than sufficient to guarantee that the intentional emission will remain in the band over the entire operating range of the radio.

### 4.5.3 Limit

CFR47 Part 407(g) - Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

### 4.5.4 Test results:

Temperature	Time	PPM
0°C	Start	5.76
	2 Min.	2.88
	5 Min	5.40
	10 min	3.24
10°C	Start	10.45
	2 Min.	6.12
	5 Min	3.24
	10 min	5.40
20°C	Start	1.44
	2 Min.	2.16
	5 Min	1.80
	10 min	5.40
30°C	Start	2.16
	2 Min.	8.65
	5 Min	1.08
	10 min	4.68
40°C	Start	2.88
	2 Min.	2.16
	5 Min	0.36
	10 min	9.73
50°C	Start	11.89
	2 Min.	1.80
	5 Min	2.52
	10 min	9.37

**Note:** 1. All frequency drifts were less than  $\pm 20$  ppm. The worst frequency drift was 11.89 ppm/ 62kHz. 2. Channel 5200MHz was selected to frequency stability.

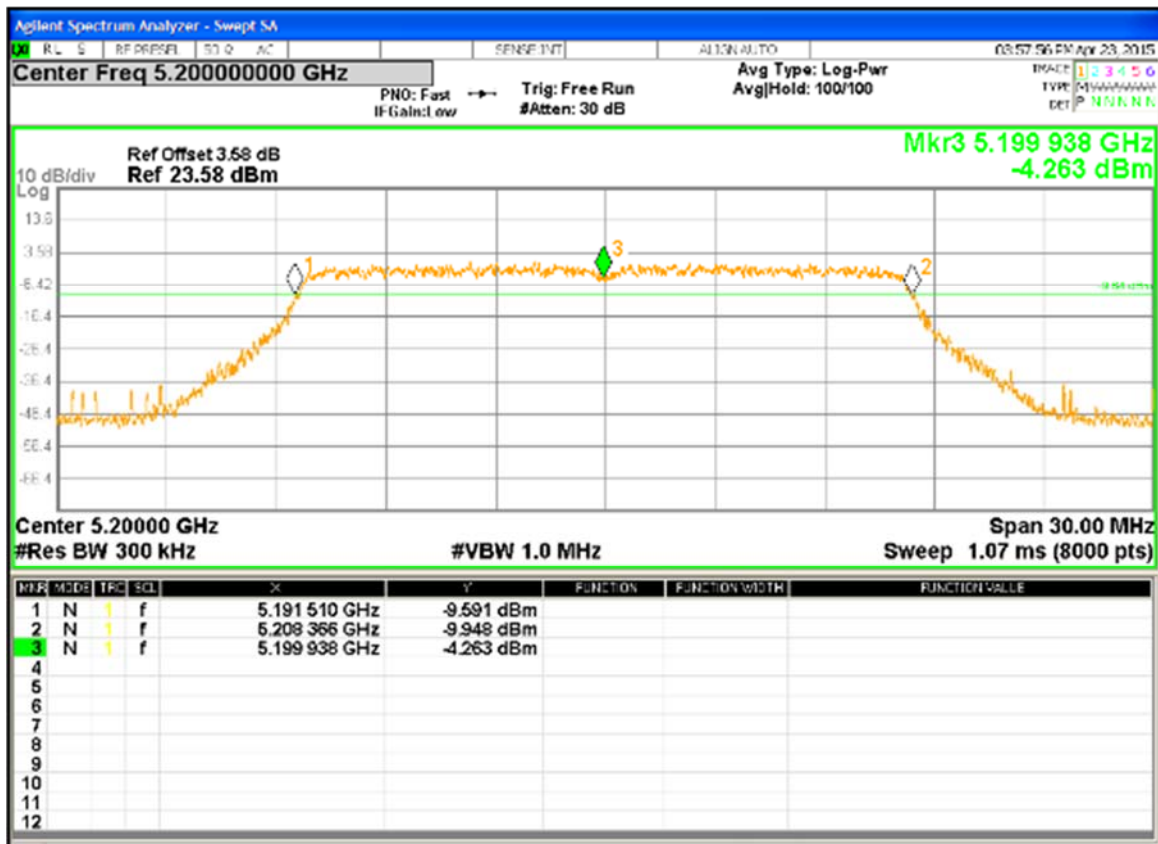


Figure 32: Frequency Stability at 5200MHz 11a mode at 6Mbps

## 4.6 Voltage Variation

In accordance with 47 CFR Part 15.31 (e) intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

### 4.6.1 Test Methodology

The ac supply voltage was varied between 85% and 115% of the nominal rated supply voltage. The fundamental frequency was observed during the variation. The access point was powered 12V DC by programmable power supply. The voltage was varied from 10.6VDC to 13.5VDC while the Center frequencies were observed and record for the maximum drift in ppm; part per millions.

### 4.6.2 Test results

Frequency MHz	Nominal (12VDC) MHz	Low Voltage (10.6 VDC) MHz	High Voltage (13.5VDC) MHz	Max Drift ppm
5200	5199.927	5199.996	5199.994	14.0 (73KHz)



Figure 33: Frequency Stability at 5200MHz 11a mode at 6Mbps

## 4.7 Maximum Permissible Exposure

### 4.7.1 Test Methodology

In this document, we try to prove the safety of radiation harmfulness to the human body for our product. The limit for Maximum Permissible Exposure (MPE) specified in FCC 1.1310 is followed. The Gain of the antenna used in this calculation is declared by the manufacturer, and the maximum total power input to the antenna is measured. Through the Friis transmission formula and the maximum gain of the antenna, we can calculate the distance, away from the product, where the limit of MPE is reached.

Although the Friis transmission formula is a far field assumption, the calculated result of that is an over-prediction for near field power density. We will take that as the worst case to specify the safety range.

### 4.7.2 RF Exposure Limit

According to FCC 1.1310 table 1: The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in 1.1307(b)

LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Average Time (minutes)
<b>(A)Limits For Occupational / Control Exposures</b>				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300	...	...	1.0	6
300 - 1500	...	...	f/300	6
1500 - 100,000	...	...	5	6
<b>(B)Limits For General Population / Uncontrolled Exposure</b>				
0.3–1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/ f <sup>2</sup> )	30
30–300	27.5	0.037	0.2	30
300 - 1500	...	...	f/1500	30
1500 - 100,000	...	...	1.0	30

F = Frequency in MHz \* = Plane-wave equivalent power density

### 4.7.3 EUT Operating Condition

The software provided by Manufacturer enabled the EUT to transmit data at lowest, middle and highest channel individually.

### 4.7.4 Classification

The antenna of the product, under normal use condition, is at least 20cm away from the body of the user. Warning statement to the user for keeping at least 20cm or more separation distance with the antenna should be included in user's manual. So, this device is classified as a **Mobile Device**.

### 4.7.5 Test Results

#### 4.7.5.1 Antenna Gain

The transmitting antenna was integrated. The directional antenna gain was +12.00dBi or 15.84 (numeric).

These calculations are based UNII -1 band power and antenna gains ( UNII band 1 has highest power for this device)

#### 4.7.5.2 Output Power into Antenna & RF Exposure value at distance 20cm:

Calculations for this report are based on highest power measurement.

Limit for MPE (from FCC part 1.1310 table1) is 1.0 mW/cm<sup>2</sup>

The highest measured total power is +24.76 dBm or 299mW

Using the Friss transmission formula, the EIRP is Pout\*G, and R is 20cm.

$P_d = (299 * 15.84) / (1600\pi) = 0.9422 \text{ mW/cm}^2$ , which is 0.057mW/cm<sup>2</sup> below to the limit.

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

### 4.7.6 Sample Calculation

The Friss transmission formula:  $P_d = (P_{out} * G) / (4 * \pi * R^2)$

Where;

$P_d$  = power density in mW/cm<sup>2</sup>

$P_{out}$  = output power to antenna in mW

$G$  = gain of antenna in linear scale

$\pi \approx 3.1416$

$R$  = distance between observation point and center of the radiator

in cm

Ref. : David K. Cheng, *Field and Wave Electromagnetics*, Second Edition, Page 640, Eq. (11-133).

## 5 Test Equipment List

### 5.1 Equipment List

Equipment	Manufacturer	Model #	Serial/Inst #	Last Cal mm/dd/yy	Next Cal mm/dd/yy
Bilog Antenna	Sunol Sciences	JB3	A102606	07/08/2014	07/08/2016
Horn Antenna	EMCO	3115	9710-5301	09/04/2013	09/14/2015
Antenna (18-26GHz)	CMT	RA42-K-F-4B-C	020131-004	07/24/2014	07/24/2015
Antenna (26-40 GHz)	CMT	RA28-K-F-4B-C	011469R-003	01/11/2015	01/11/2016
Preamplifier	Sonoma Instrument	310	213221	09/30/2014	09/30/2015
Bilog Antenna	Sunol Sciences	JB3	A020502	04/12/2013	
Preamplifier	Milteq	TTA1800-30-4G	1842452	01/13/2015	01/13/2016
Spectrum Analyzer	Rhode Schwarz	ESIB	832427/002	01/08/2015	01/08/2016
Amplifier	Rohde & Schwarz	TS-PR26	100011	07/24/2014	07/24/2015
Amplifier	Rohde & Schwarz	TS-PR40	100012	01/11/2015	01/11/2016
Signal Generator	Anritsu	MG3694A	42803	01/13/2015	01/13/2016
Notch Filter	Micro-Tronics	BRM50702	37	07/18/2014	07/18/2015
Notch Filter	Micro-Tronics	BRC50703	11	07/18/2014	07/18/2015
Notch Filter	Micro-Tronics	BRC50704	8	07/18/2014	07/18/2015
Notch Filter	Micro-Tronics	BRC50705	9	07/18/2014	07/18/2015
High Pass Filter (8.5 GHz)	Micro-Tronics	HPM50107	4	01/16/2015	01/16/2016
Power Meter	Agilent	E4418B	MY45103902	01/09/2015	01/09/2016
Power Sensor	Hewlett Packard	8482A	55-5131	01/09/2015	01/09/2016
Thermo Chamber	Espec	BTZ-133	0613436	03/16/2015	03/16/2016
Spectrum Analyzer	Agilent	N9038A	MY51210195	01/08/2015	01/08/2016
Spectrum Analyzer	Agilent	N9030A	MY51380689	01/19/2015	01/19/2016

\* Calibration of equipment past due for re-calibration will be performed expeditiously. If any equipment is found to be out of tolerance at that time, affected customers will be notified accordingly.



---

## 6 EMC Test Plan

### 6.1 Introduction

This section provides a description of the Equipment Under Test (EUT), configurations, operating conditions, and performance acceptance criteria. It is an overview of information provided by the manufacturer so that the test laboratory may perform the requested testing.

### 6.2 Customer

**Table 8:** Customer Information

<b>Company Name</b>	Aruba Networks
<b>Address</b>	1344 Crossman Ave.
<b>City, State, Zip</b>	Sunnyvale, CA 94089
<b>Country</b>	USA
<b>Phone</b>	(408) 990- 2557

**Table 9:** Technical Contact Information

<b>Name</b>	Robert Hastings
<b>E-mail</b>	rhastings@arubanetworks.com
<b>Phone</b>	(408) 990- 2557

### 6.3 Equipment Under Test (EUT)

**Table 10:** EUT Specifications

<b>EUT Specifications</b>	
Dimensions	180mm x 180mm x 45mm (W x D x H)
AC Adapter (EMSA120300, S/N: )	Input Voltage: 100-240Vac 50-60Hz Input Current: 1A Output Voltage: 12VDC Output Current: 3.0A Power over Ethernet (PoE): 48 Vdc (nominal)
Environment	Indoor and Outdoor
Operating Temperature Range:	0 to 50 degrees C
Multiple Feeds:	<input checked="" type="checkbox"/> Yes and how many 4 <input type="checkbox"/> No
Hardware Version	3
Part Number	APIN0324 & APIN0325
RF Software Version	QSPR Version 5.0.0 RF Test Image used with QSPR: ipq806xrd_2gpcie11_78hex_5gpcie_50hex.ari
802.11-radio modules	
Operating Modes	802.11a, b, g, nHT 20, HT40, VHT20, VHT40,
Transmitter Frequency Band	2.4GHz 2400-2483.5MHz 5.15 GHz to 5.25 GHz (Indoor Use) 5.25GHz to 5.35GHz 5.47GHz to 5.725GHz 5.725 GHz to 5.85 GHz
Max. Rated Power Output	See Channel Planning Table.
Power Setting @ Operating Channel	See Channel Planning Table.
Antenna Type	4 integrated internal Antennas and several External Antennas see attached sheet
Antenna Gain	See details below
Modulation Type	<input type="checkbox"/> AM <input type="checkbox"/> FM <input checked="" type="checkbox"/> DSSS <input checked="" type="checkbox"/> OFDM <input checked="" type="checkbox"/> Other describe: 16-QAM, 64-QAM, 128-QAM
Data Rate	802.11b: 1, 2, 5.5, 11 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 802.11n: 6.5 to 450 (MCS0 to MCS23) 802.11ac: 6.5 to 1,733 (MCS0 to MCS9, NSS = 1 to 4)

<b>EUT Specifications</b>	
TX/RX Chain (s)	MIMO (4x4)
Directional Gain Type	<input checked="" type="checkbox"/> Correlated <input checked="" type="checkbox"/> Beam-Forming <input type="checkbox"/> Other describe:
Type of Equipment	<input type="checkbox"/> Table Top <input checked="" type="checkbox"/> Wall-mount <input type="checkbox"/> Floor standing cabinet <input checked="" type="checkbox"/> Other Ceiling Mounted
<b>Note:</b> 1. All four chains will be on / transmitted at all time. 2. This report only documents the radio characteristics for 2400 – 2483.5MHz band	

**Internal Antennas**

Model:	Type	Gain dBi	Frequency MHz	Beam Forming Gain (dBi)
Metal Sheet	Omni	4	2400 - 2500	4.6
		5.5	5150 - 5875	3.5

**External Antennas**

Model:	Type	Gain dBi	Frequency MHz	Beam Forming Gain (dBi)
AP-ANT-1W	Omnidirectional	3.8	2400 - 2500	6
		5.8	4900 - 5875	
AP-ANT-13B	Downtilt Omni	4.4	2400 - 2500	6
		3.3	4900 - 5900	
AP-ANT-19	Dual Band Omnidirectional	3	2400 - 2500	6
		6	5150 - 5875	
AP-ANT-20W	Omnidirectional	2	2400 - 2500	6
		2	4900 - 5875	
AP-ANT-40	Downtilt Omni	3.9	2400 - 2500	3
		4.7	4900 - 5900	
AP-ANT-45	Multipolarized	5	2400 - 2500	3
		5	4900 - 6000	
AP-ANT-48	Multipolarized	8.5	2400 - 2500	3
		8.5	4900 - 6000	

**Table 11: EUT Channel Power Specifications**

**APIN0324 with Highest gain External antenna AP-ANT-19**

No.	Frequency (MHz)	Target Power Value dBm			
		802.11a	802.11n HT20/VHT20	802.11n HT40/VHT40	802.11AC VHT80
149	5745	16	17		
151	5755			16	
153	5765				
155	5775				9
157	5785	17	17		
159	5795			16	
161	5805				
165	5825	17	17		

**Note:** 1. The center operating frequency is shifted upward by 10 MHz for HT40.  
 2. The adjusted power target values are updated at the evaluated frequencies.

**APIN0325 Internal Antenna unit**

No.	Frequency (MHz)	Target Power Setting			
		802.11a	802.11n HT20/VHT20	802.11n HT40/VHT40	802.11AC VHT80
149	5745	16	17		
151	5755			16	
153	5765	17	17		
155	5775				16
157	5785	17	17		
159	5795			16	
161	5805				
165	5825	17	17		

**Note:** 1. The center operating frequency is shifted upward by 10 MHz for HT40.  
 2. The adjusted power target values are updated at the evaluated frequencies.

**Table 12:** Interface Specifications

Interface Type	Cabled with what type of cable?	Is the cable shielded?	Maximum potential length of the cable?	Metallic (M), Coax (C), Fiber (F), or Not Applicable?
RJ45	CAT-5 Ethernet	<input type="checkbox"/> No	<input checked="" type="checkbox"/> Metric: 10 m	<input checked="" type="checkbox"/> M







**Table 13:** Supported Equipment

Equipment	Manufacturer	Model	Serial	Used for
Laptop	Dell	PP23LB	9271001233	Setup EUT operating channel
<b>Note:</b> None.				

**Table 14:** Description of Sample used for Testing

Device	Serial	RF Connection	CFR47 Part 15.247
APIN0325	DD0000409	Integrated Antenna	Radiated Emissions and Band edges
APIN0324	DD0000510	External Antennas	Radiated Emissions and Band edges Test was performed with AP-ANT-19 Dual Band Omnidirectional max gain 12dBi, with Beam forming) Highest spurious emissions were verified with highest gain antenna of each type. AP-ANT-48 Multi-polarized Antenna (max gain 11.5dBi, with beam forming) was used. Only highest spurious emissions are placed in the report.
		Direct via reverse SMA ports for External Antenna Connection	Output Power, Peak Power Spectral Density, Occupied Bandwidth Conducted Spurious Emissions

**Table 15:** Description of Test Configuration used for Radiated Measurement.

Device	Antenna	Mode	Setup Photo (X-Axis)	Setup Photo (Y-Axis)	Setup Photo (Z-Axis)
APIN0325	Integrated	Transmit	 EUT laid flat.	 EUT UP Right	Na.
APIN0324	AP-ANT-48 External Antennas AP-ANT-19	Transmit	 EUT laid flat Antennas configured for maximum gain. 	 EUT stood upright Antennas configured for maximum gain 	NA
<b>Note:</b> Pre-scans were performed in 2 supporting axis Wall mounted or Ceiling mounted and X-axis simulating ceiling mounted was worst.					

**Table 16:** Final Test Mode for 5725 – 5850MHz

<b>Test</b>	<b>802.11a/ HT20/VHT20</b>	<b>802.11n HT40/VHT40</b>	<b>802.11n AC VHT80</b>
Occupied Bandwidth FCC Part 15.407(a)	Band U-NII 3: 5745, 5785, 5825MHz 4Streams – 6.0 and 6.5Mbps/ stream	Band U-NII 3: 5755, 5795 4Streams –13.5Mbps/ stream	Band U-NII 3: 5775 4Streams – 56.5Mbps/ stream
Output Power FCC Part 15.407(a)(1-2)	Band U-NII 3: 5745, 5785, 5825MHz 4Streams – 6.0 and 6.5Mbps/ stream	Band U-NII 3: 5755, 5795 4Streams –13.5Mbps/ stream	Band U-NII 3: 5775 4Streams – 56.5Mbps/ stream
Power Spectral Density FCC Part 15.407(a)	Band U-NII 3: 5745, 5785, 5825MHz 4Streams – 6.0 and 6.5Mbps/ stream	Band U-NII 3: 5755, 5795 4Streams –13.5Mbps/ stream	Band U-NII 3: 5775 4Streams – 56.5Mbps/ stream
Band-Edge (Radiated) FCC Part 15.205, 15.209, 15.407(b)	Band U-NII 3: 5745, 5785, 5825MHz  4Streams – 6.0 and 6.5Mbps/ stream  Test performed with Highest gain Antenna	Band U-NII 3: 5755, 5795 4Streams –13.5Mbps/ stream  Test performed with Highest gain Antenna	Band U-NII 3: 5775 4Streams – 56.5Mbps/ stream  Test performed with Highest gain Antenna
Transmitted Spurious Emission (30 MHz – 1GHz) FCC Part 15.205, 15.209, 15.407(b)	Band U-NII 3: 5745, 5785, 5825MHz 4Streams – 6.0 and 6.5Mbps/ stream  Test performed highest power (mid channel) of each band	Band U-NII 3: 5755, 5795 4Streams –13.5Mbps/ stream  Test performed highest power (mid channel) of each band	Band U-NII 3: 5775 4Streams – 56.5Mbps/ stream  Test performed highest power (mid channel) of each band
Transmitted Spurious Emission (Above 1GHz) FCC Part 15.205, 15.209, 15.407(b)	Band U-NII 3: 5745, 5785, 5825MHz 4Streams – 6.0 and 6.5Mbps/ stream  Test performed with Highest gain Antenna of each type.	Band U-NII 3: 5755, 5795 4Streams –13.5Mbps/ stream  Test performed with Highest gain Antenna of each type.	Band U-NII 3: 5775 4Streams – 56.5Mbps/ stream  Test performed with Highest gain Antenna of each type.
Conducted Spurious Emission (antenna port). FCC Part 15.407 (b)	Transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of –17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of –27dBm/MHz. This is equivalent to 78.2dBuV/m and 68.2dBuV/m at 3 meter distance. The EUT is satisfied the requirement by meeting the limit under CFR47 Part 15.209.		
AC Conducted Emission FCC Part 15.207		5200 MHz at 4 Data Stream: 6.0Mbps	

Test	802.11a/ HT20/VHT20	802.11n HT40/VHT40	802.11n AC VHT80
Frequency Stability FCC Part 15.407 (g)	at 5200 MHz, 4 data streams HT20 mode 6.5Mbps		
Voltage Variation FCC Part 15.31 (e)	at 5200 MHz, 4 data streams HT20 mode 6.5Mbps,		
<p><b>Note:</b> 1. All radiated emission performed on X-Axis.            2. All four chains will be on at all time.            3. All tests were pre-scanned for worst case before final testing. Test report shows only final readings</p>			



## 6.4 Test Specifications

Testing requirements

**Table 17:** Test Specifications

<b>Emissions and Immunity</b>	
<b>Standard</b>	<b>Requirement</b>
CFR 47 Part 15.407: 2014	All

**END OF REPORT**